



**FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CERTIFICATION TEST REPORT**

**FOR**

**QUAD-BAND RADIO WITH WLAN AND BT RADIO**

**MODEL NUMBER: A1530**

**FCC ID: BCG-E2643A  
IC: 579C-E2643A**

**REPORT NUMBER: 13U15037 - 7**

**ISSUE DATE: JULY 22, 2013**

*Prepared for*

**APPLE**

**1 INFINITE LOOP**

**CUPERTINO, CA 95014, U.S.A**

*Prepared by*

**UL VERIFICATION SERVICES INC.**

**47173 BENICIA STREET**

**FREMONT, CA 94538, U.S.A.**

**TEL: (510) 771-1000**

**FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-------------------|------------------|-------------------|
| --          | 07/18/13          | Initial Issue    | T. Chan           |

## TABLE OF CONTENTS

|   |            |
|---|------------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>                           | <b>5</b>   |
| <b>2. TEST METHODOLOGY .....</b>                                      | <b>6</b>   |
| <b>3. FACILITIES AND ACCREDITATION .....</b>                          | <b>6</b>   |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>                           | <b>6</b>   |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>                    | <i>6</i>   |
| 4.2. <i>SAMPLE CALCULATION .....</i>                                  | <i>6</i>   |
| 4.3. <i>MEASUREMENT UNCERTAINTY.....</i>                              | <i>6</i>   |
| <b>5. EQUIPMENT UNDER TEST .....</b>                                  | <b>7</b>   |
| 5.1. <i>DESCRIPTION OF EUT .....</i>                                  | <i>7</i>   |
| 5.2. <i>MAXIMUM OUTPUT POWER.....</i>                                 | <i>7</i>   |
| 5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>                   | <i>7</i>   |
| 5.4. <i>SOFTWARE AND FIRMWARE.....</i>                                | <i>7</i>   |
| 5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>                    | <i>8</i>   |
| 5.6. <i>DESCRIPTION OF TEST SETUP.....</i>                            | <i>9</i>   |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>                        | <b>12</b>  |
| <b>7. ANTENNA PORT TEST RESULTS .....</b>                             | <b>13</b>  |
| 7.1. <i>2.4 GHz BAND.....</i>   | <i>13</i>  |
| 7.1.1. <i>6 dB BANDWIDTH.....</i>                                     | <i>13</i>  |
| 7.1.2. <i>99% BANDWIDTH.....</i>                                      | <i>20</i>  |
| 7.1.3. <i>AVERAGE POWER .....</i>                                     | <i>27</i>  |
| 7.1.4. <i>OUTPUT POWER .....</i>                                      | <i>28</i>  |
| 7.1.5. <i>PSD .....</i>   | <i>37</i>  |
| 7.1.6. <i>OUT-OF-BAND EMISSIONS .....</i>                             | <i>44</i>  |
| 7.2. <i>5.8 GHz BAND.....</i>   | <i>57</i>  |
| 7.2.1. <i>6 dB BANDWIDTH.....</i>                                     | <i>57</i>  |
| 7.2.2. <i>99% BANDWIDTH.....</i>                                      | <i>63</i>  |
| 7.2.3. <i>AVERAGE POWER .....</i>                                     | <i>69</i>  |
| 7.2.4. <i>OUTPUT POWER .....</i>                                      | <i>70</i>  |
| 7.2.5. <i>PSD .....</i>   | <i>78</i>  |
| 7.2.6. <i>OUT-OF-BAND EMISSIONS .....</i>                             | <i>84</i>  |
| <b>8. RADIATED TEST RESULTS.....</b>                                  | <b>96</b>  |
| 8.1. <i>LIMITS AND PROCEDURE.....</i>                                 | <i>96</i>  |
| 8.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>                              | <i>97</i>  |
| 8.3. <i>TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND .....</i>     | <i>97</i>  |
| 8.4. <i>TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND .....</i>     | <i>107</i> |
| 8.5. <i>TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND.....</i> | <i>117</i> |

---

|            |   |            |
|------------|---|------------|
| 8.6.       | TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND .....     | 127        |
| 8.7.       | TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND..... | 133        |
| 8.8.       | TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND..... | 139        |
| 8.9.       | WORST-CASE BELOW 1 GHz.....                               | 143        |
| <b>9.</b>  | <b>AC POWER LINE CONDUCTED EMISSIONS .....</b>            | <b>145</b> |
| <b>10.</b> | <b>SETUP PHOTOS .....</b>                                 | <b>149</b> |

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE  
1 INFINITE LOOP  
CUPERTINO, CA 95014, U.S.A.

**EUT DESCRIPTION:** QUAD-BAND RADIO WITH WLAN AND BT RADIO

**MODEL:** A1530

**SERIAL NUMBER:** C39KD00CFJ0Y

**DATE TESTED:** APRIL 24 – JUNE 10, 2013

| APPLICABLE STANDARDS                    |              |
|---|--------------|
| STANDARD                                | TEST RESULTS |
| CFR 47 Part 15 Subpart C                | Pass         |
| INDUSTRY CANADA RSS-210 Issue 8 Annex 8 | Pass         |
| INDUSTRY CANADA RSS-GEN Issue 3         | Pass         |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:



Thu Chan  
WiSE Operations Manager  
UL Verification Services Inc.

Francisco Guarnero  
WiSE Lab Technician  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2009, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsenc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB     |
| Radiated Disturbance, 30 to 1000 MHz  | 4.94 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT, Model A1530 is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/LTE radio, IEEE 802.11a/b/g/n, Bluetooth and GPS radio. The rechargeable battery is not user accessible.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

| Frequency Range (MHz) | Mode         | Output Power (dBm) | Output Power (mW) |
|-----------------------|--------------|--------------------|-------------------|
| 2412 - 2462           | 802.11b      | 17.238             | 52.94             |
| 2412 - 2462           | 802.11g      | 23.161             | 207.06            |
| 2412 - 2462           | 802.11n HT20 | 23.041             | 201.42            |
| 5745 - 5825           | 802.11a      | 24.141             | 259.48            |
| 5745 - 5825           | 802.11n HT20 | 23.590             | 228.56            |
| 5755 - 5795           | 802.11n HT40 | 24.005             | 251.48            |

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna, with a maximum gain as below table.

| FREQUENCY (MHZ) | ANTENNA GAIN ( dBi) |
|-----------------|---------------------|
| 2400 – 2483.5   | 1.09                |
| 5150 -- 5250    | -5.91               |
| 5250 -- 5350    | -5.83               |
| 5500 -- 5700    | -4.25               |
| 5725 -- 5850    | -4.21               |

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was WL Tool FW 6.10.56.166

## 5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation for 2.4GHz, and for 5GHz ; therefore, all final radiated testing was performed with the EUT in worst case orientation.

Worst-case data rates as provided by the client were:

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11a mode: 6 Mbps

802.11n HT20mode: MCS0

802.11n HT40mode: MCS0



## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List |              |       |                   |
|------------------------|--------------|-------|-------------------|
| Description            | Manufacturer | Model | Serial Number     |
| AC adapter             | Apple        | A1385 | D292365D11QDHLHCA |
| Earphone               | Apple        | NA    | NA                |

### I/O CABLES (Conducted Setup)

| I/O Cable List |         |                      |                |            |                  |                      |
|----------------|---------|----------------------|----------------|------------|------------------|----------------------|
| Cable No       | Port    | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks              |
| 1              | Antenna | 1                    | SMA            | Shielded   | 0.1m             | To Spectrum Analyzer |


### I/O CABLES

| I/O Cable List |      |                      |                |            |                  |         |
|----------------|------|----------------------|----------------|------------|------------------|---------|
| Cable No       | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1              | Jack | 1                    | Earphone       | Unshielded | 0.5m             | N/A     |


### TEST SETUP

The EUT is a stand-alone device.


**SETUP DIAGRAM FOR TESTS**

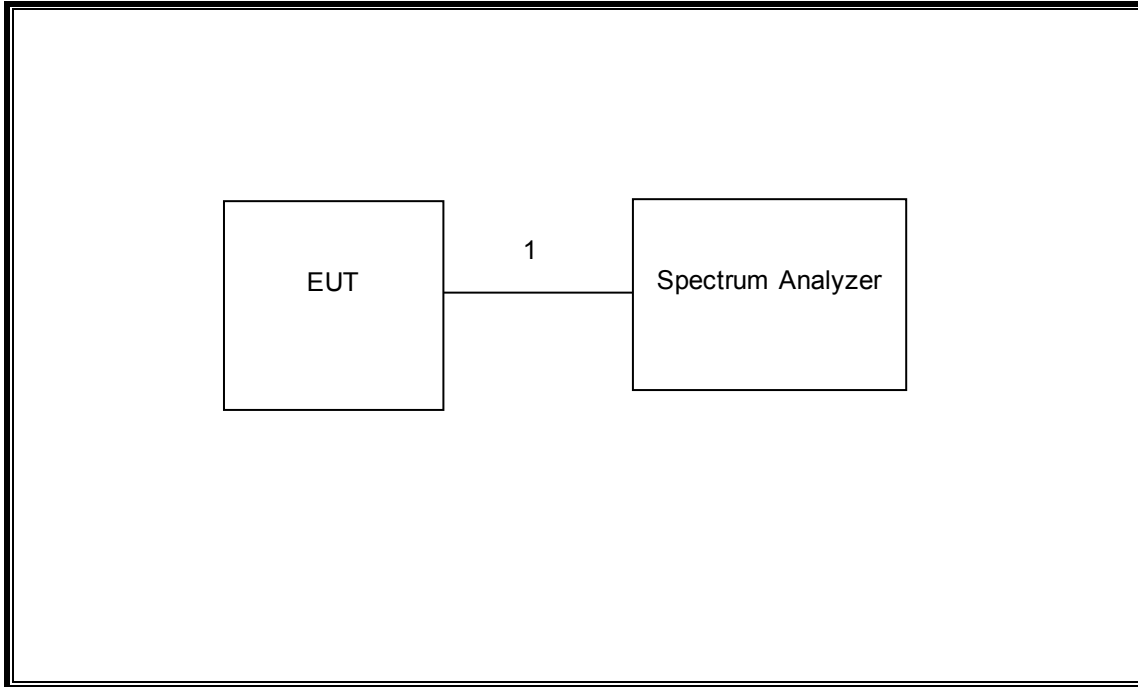

**SETUP DIAGRAM FOR RADIATED TESTS**

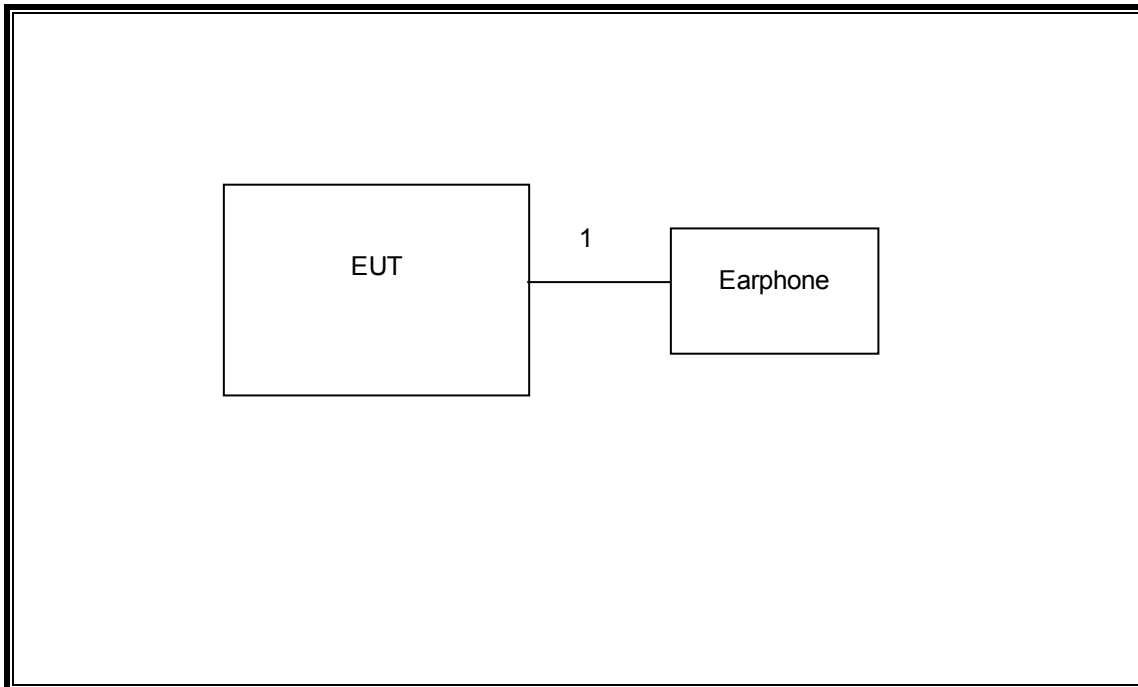

**SETUP DIAGRAM FOR AC POWER CONDUCTED TESTS**

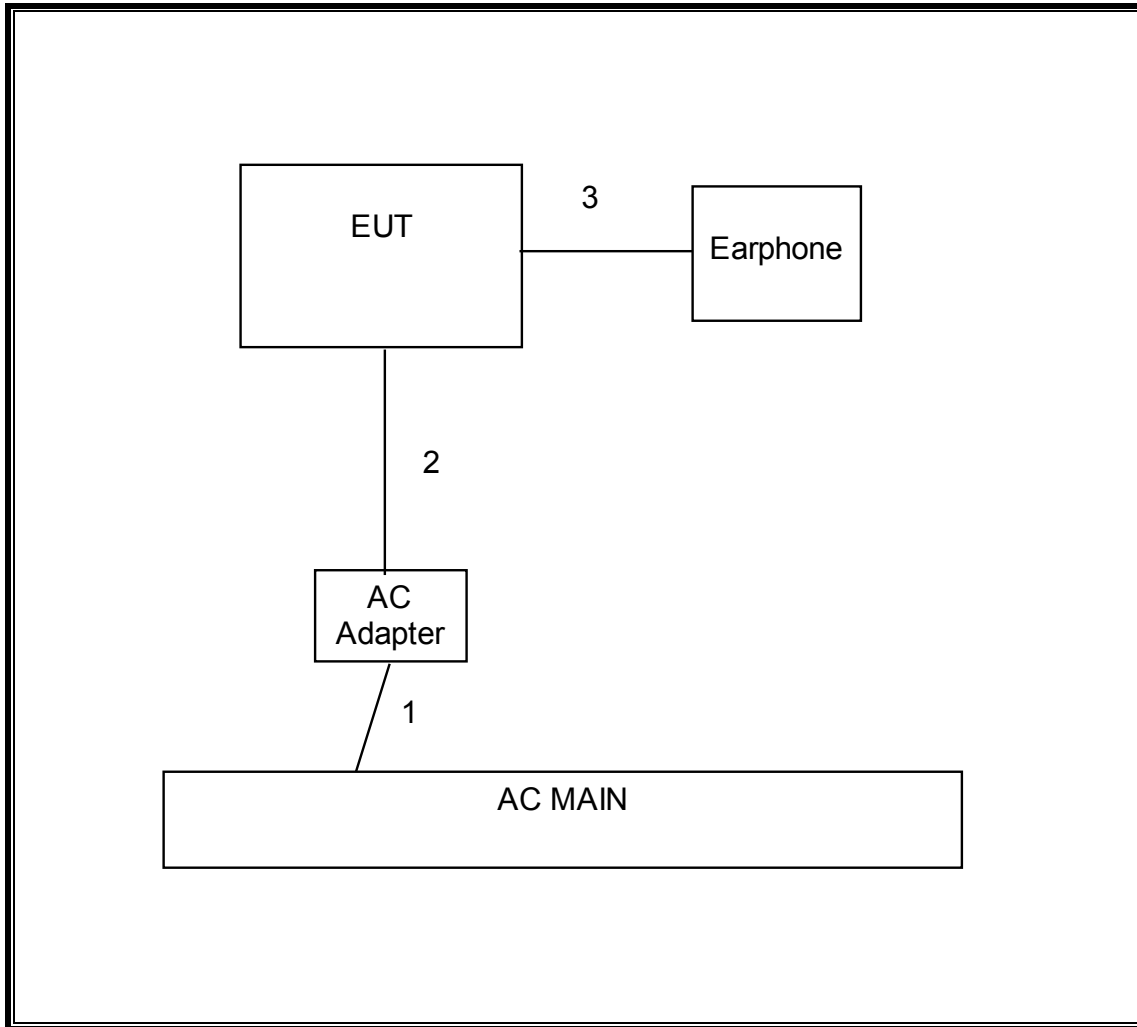

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST EQUIPMENT LIST            |               |              |        |           |
|--------------------------------|---------------|--------------|--------|-----------|
| Description                    | Manufacturer  | Model        | Asset  | Cal Due   |
| Spectrum Analyzer, 44GHz       | Agilent       | N9030A       | F00129 | 02/22/14  |
| Spectrum Analyzer, 44GHz       | Agilent       | E4446A       | C01159 | 04/10/14  |
| Directional Coupler            | Krytar        | 1817         | N02656 | CNR       |
| Communication Test Set         | Agilent / HP  | E5515C       | C01086 | 11/10/13  |
| Communication Test Set         | R & S         | CMW500       | F00014 | 02/21/14  |
| Temperature / Humidity Chamber | Thermotron    | SE 600-10-10 | C00930 | 01/09/14  |
| Signal generator, 6 GHz        | Agilent / HP  | 8665B        | F00066 | 05/07/14  |
| Highpass Filter, 2.7 GHz       | Micro-Tronics | HPM13194     | N02686 | CNR       |
| Highpass Filter, 1.5 GHz       | Micro-Tronics | HPM13193     | N02688 | CNR       |
| Bilog, 30-1GHz                 | Sunol Science | JB1          | C01011 | 03/28/14  |
| Peak Power Meter               | Agilent       | N1911A       | F00026 | 04/02/14  |
| Peak Power Sensor              | Agilent       | E9323A       | F00160 | 04/03/14  |
| Horn Antenna                   | ETS Lindgren  | 3117         | C01005 | 2/21/2014 |
| Horn Antenna                   | ETS Lindgren  | 3117         | F00131 | 2/19/2014 |
| PreAmp 1-18GHz                 | Agilent/HP    | 8449B        | F00167 | 3/23/2014 |
| PreAmp 1300MHz                 | Agilent       | 8447D        | C00580 | 1/28/2014 |

### MEASUREMENT METHODS

KDB 558074 Measurement Procedure PK2 is used for power and PKPSD is used for power spectral density.

KDB 558074 Measurement Procedure AVG1 is used for power and PKAVG is used for power spectral density.

KDB 558074 Measurement Procedure AVG2 is used for power and PKAVG is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

## 7. ANTENNA PORT TEST RESULTS

### 7.1. 2.4 GHz BAND

#### 7.1.1. 6 dB BANDWIDTH

##### LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### TEST PROCEDURE

KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

##### RESULTS

###### b Mode

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low     | 2412            | 8.556                | 0.5                 |
| Mid     | 2437            | 8.076                | 0.5                 |
| High    | 2462            | 8.088                | 0.5                 |

###### g Mode



| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low     | 2412            | 16.376               | 0.5                 |
| Mid     | 2437            | 16.434               | 0.5                 |
| High    | 2462            | 16.491               | 0.5                 |


###### HT20

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low     | 2412            | 17.411               | 0.5                 |
| Mid     | 2437            | 17.630               | 0.5                 |
| High    | 2462            | 17.676               | 0.5                 |

**b mode**



**6 dB BANDWIDTH**

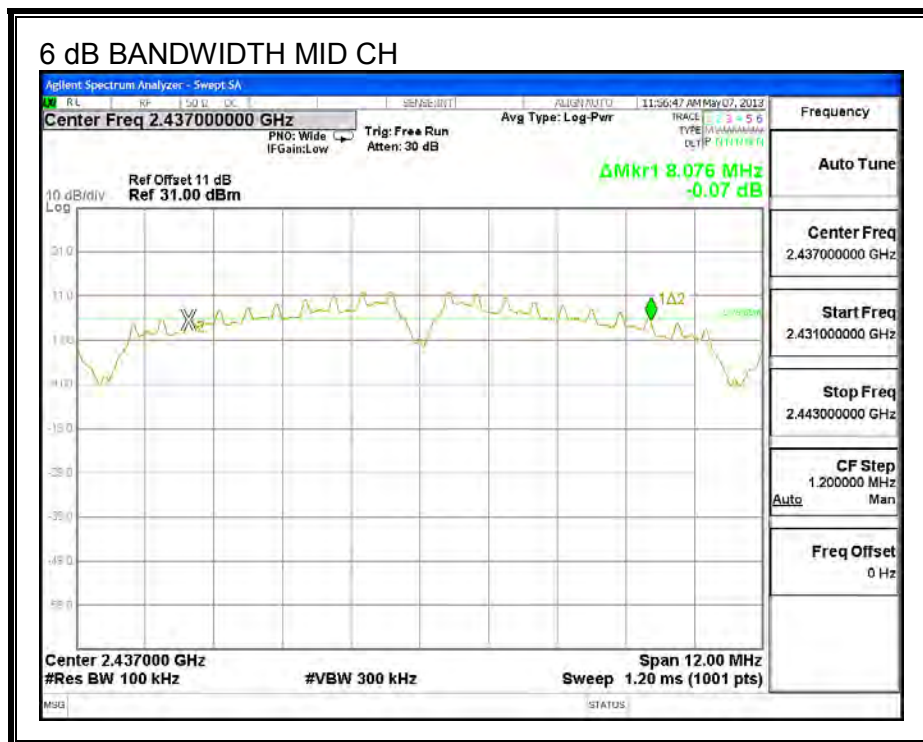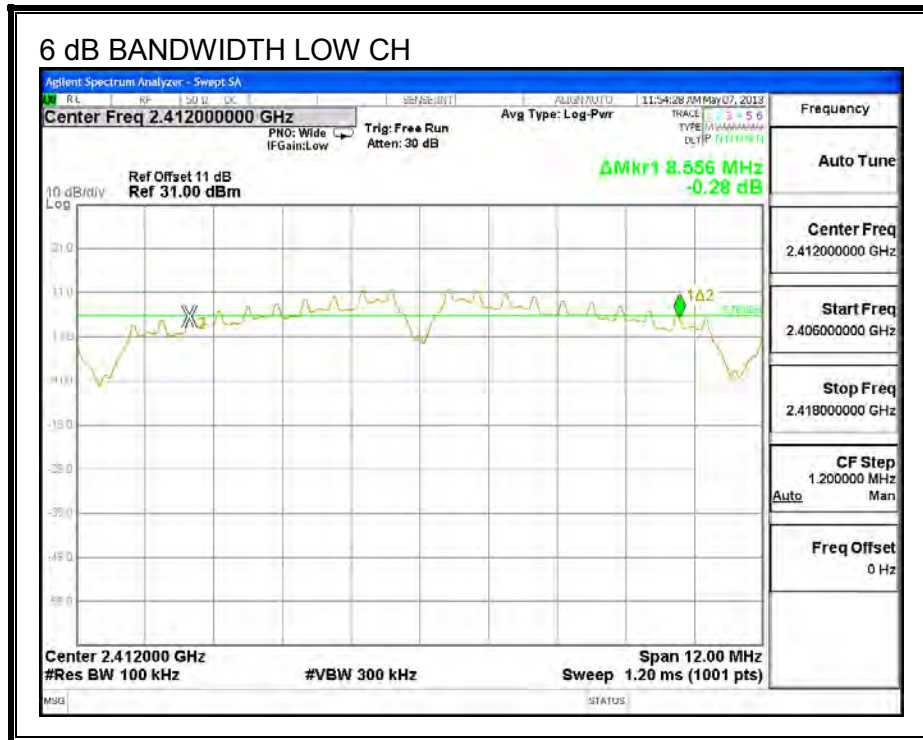

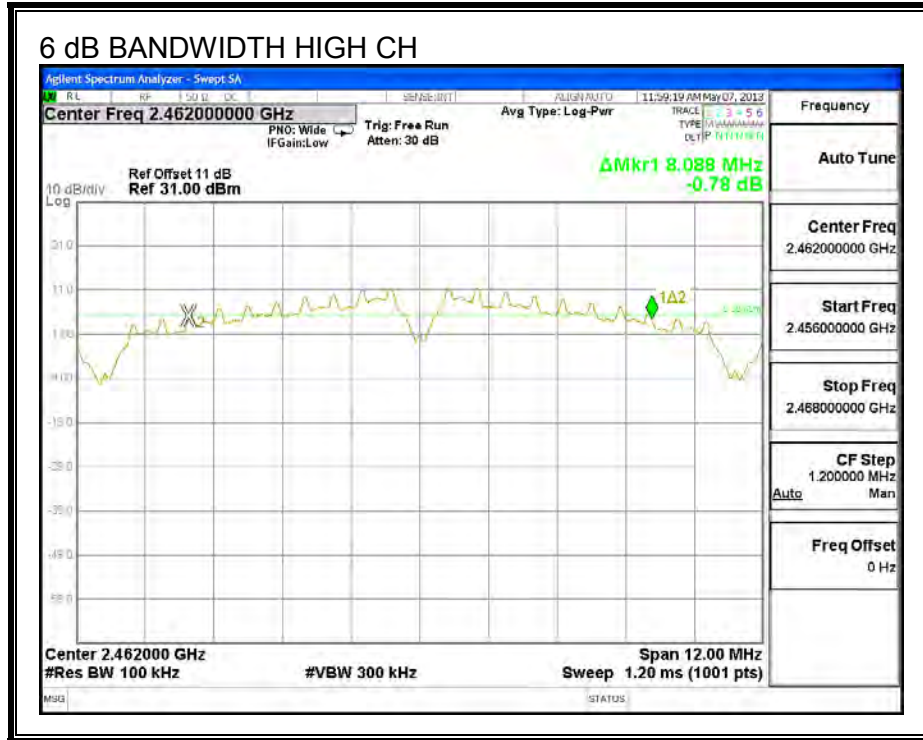


**g mode**

**6 dB BANDWIDTH**

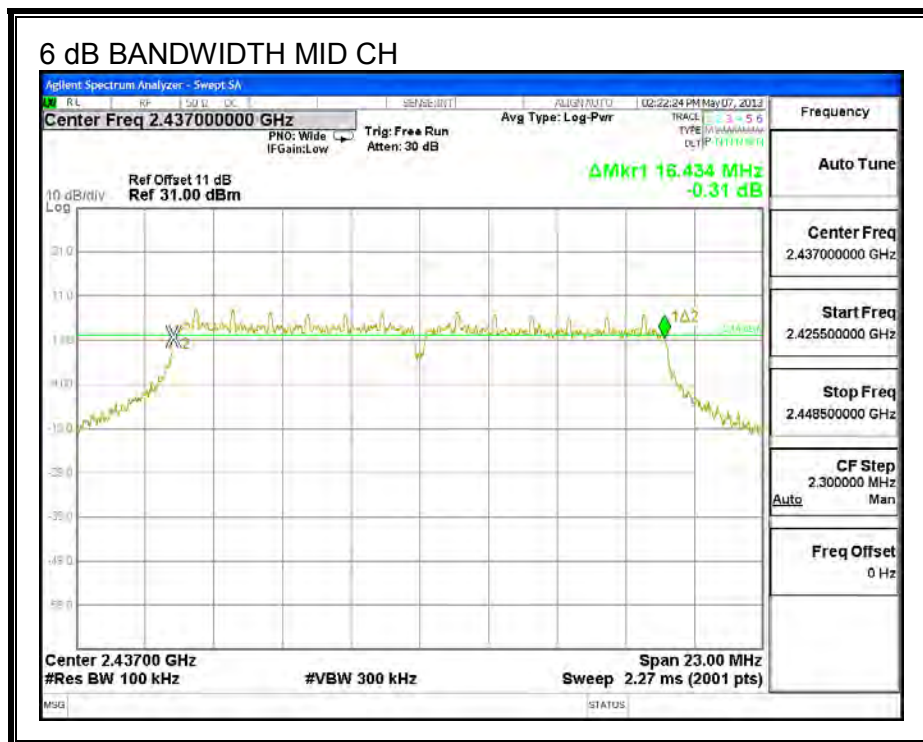
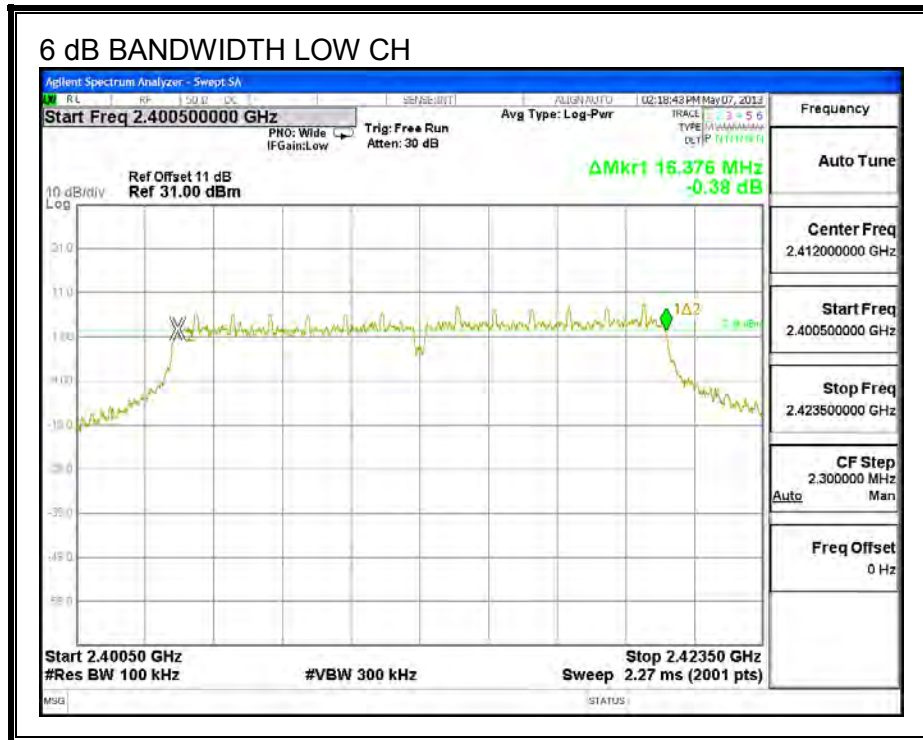





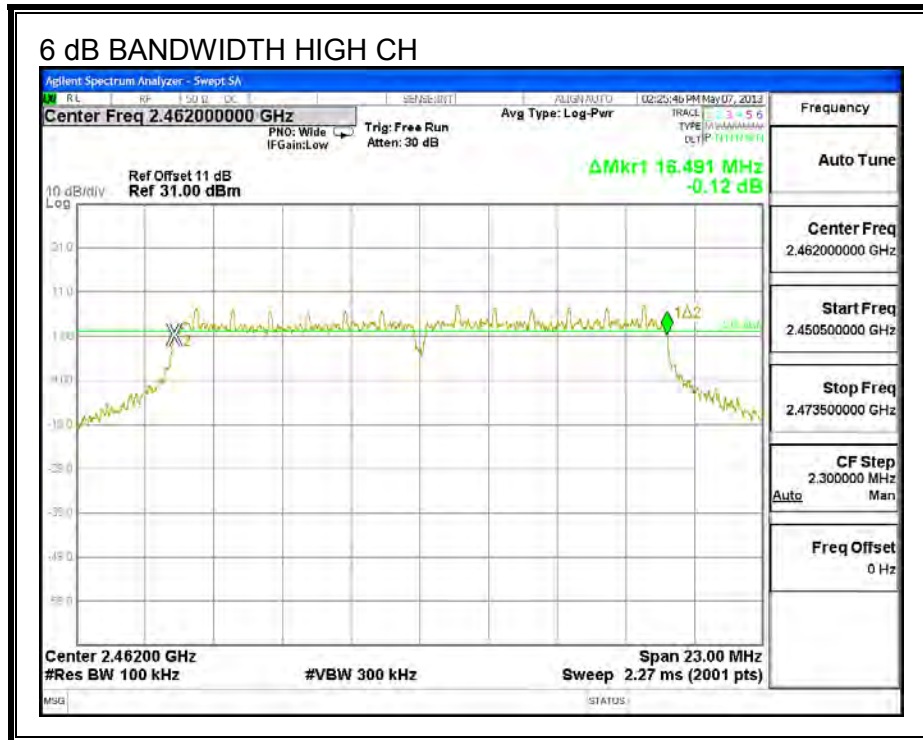

**HT20**

**6 dB BANDWIDTH**

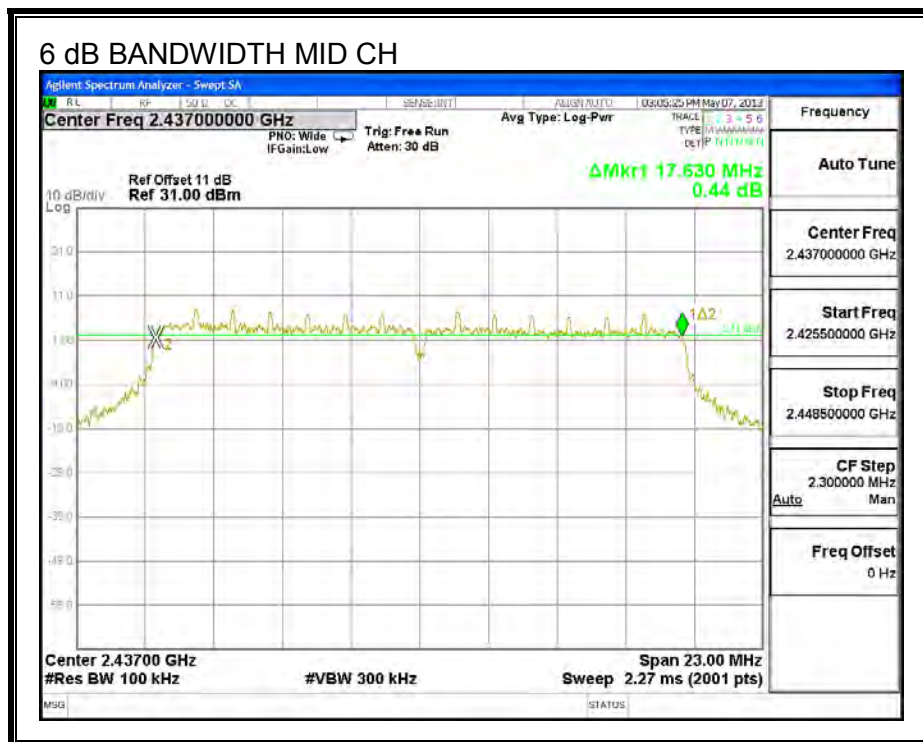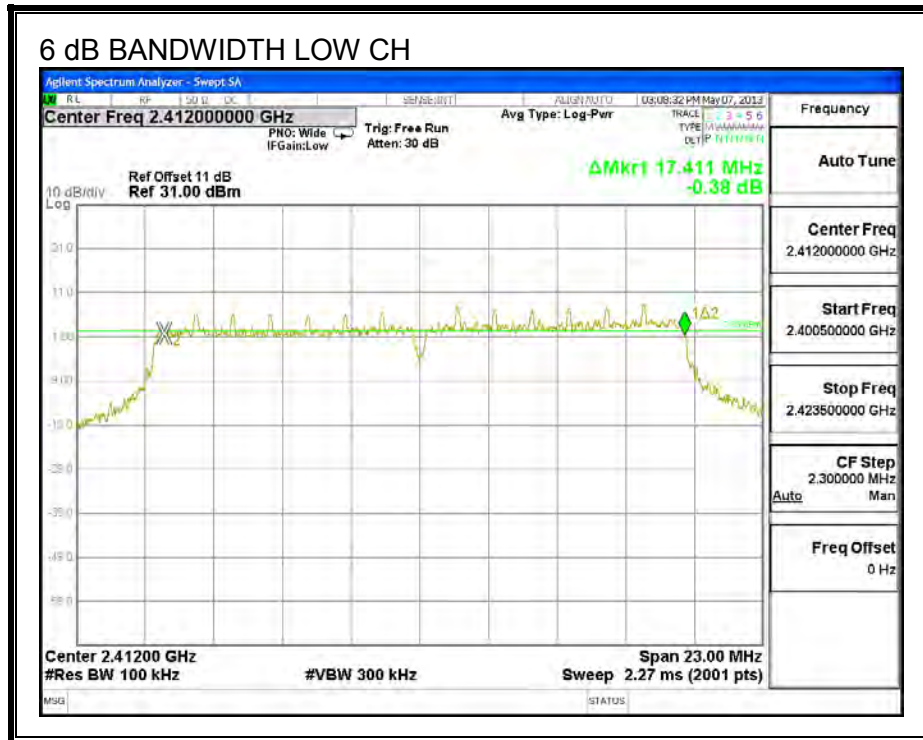

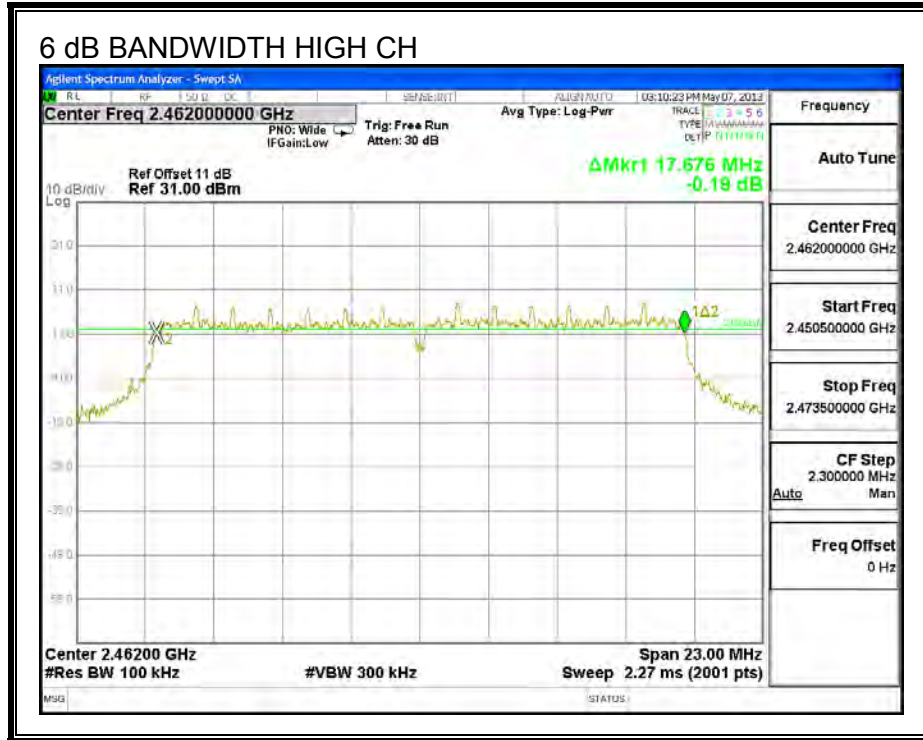

### 7.1.2. 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.

#### RESULTS

##### b Mode

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low     | 2412            | 12.6060             |
| Mid     | 2437            | 12.5900             |
| High    | 2462            | 12.2920             |

##### g mode



| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low     | 2412            | 16.6810             |
| Mid     | 2437            | 16.5840             |
| High    | 2462            | 16.6870             |


##### HT20

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low     | 2412            | 17.8860             |
| Mid     | 2437            | 17.7810             |
| High    | 2462            | 17.9130             |

**b mode**



**99% BANDWIDTH**

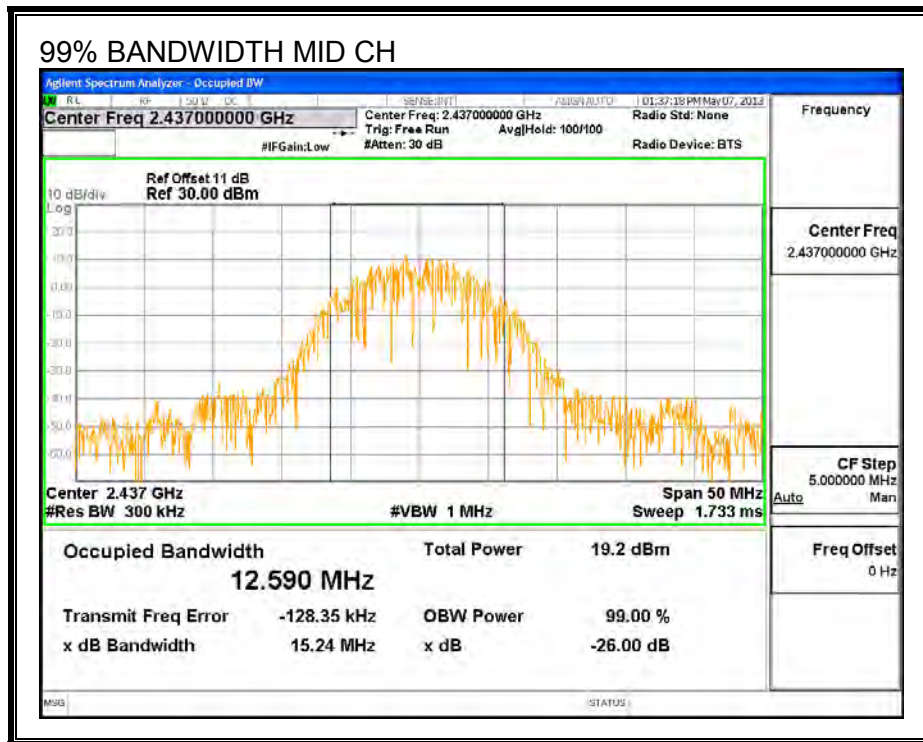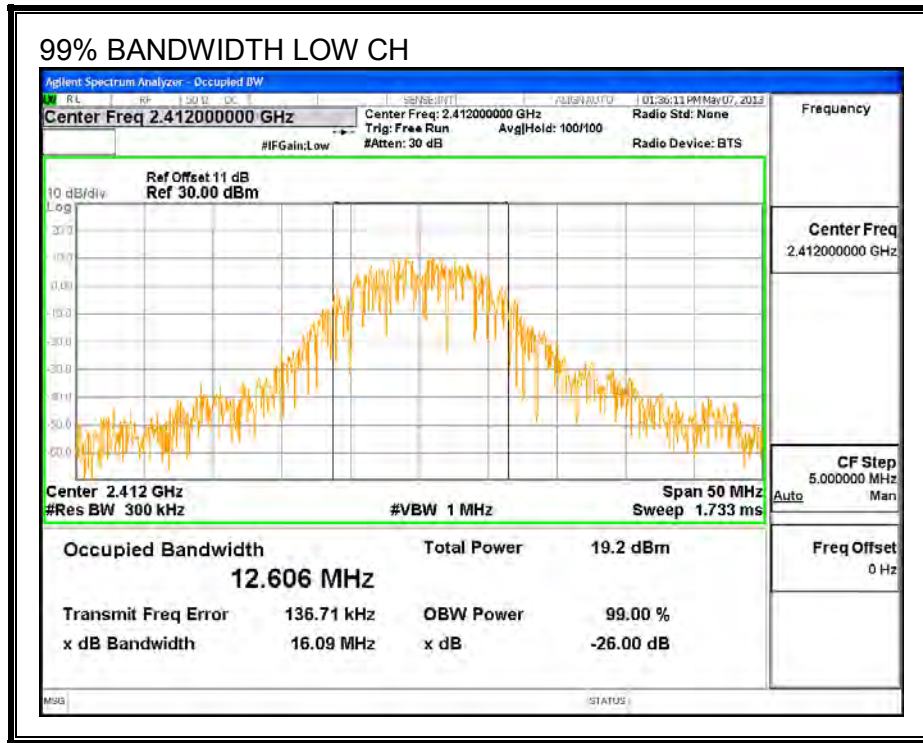


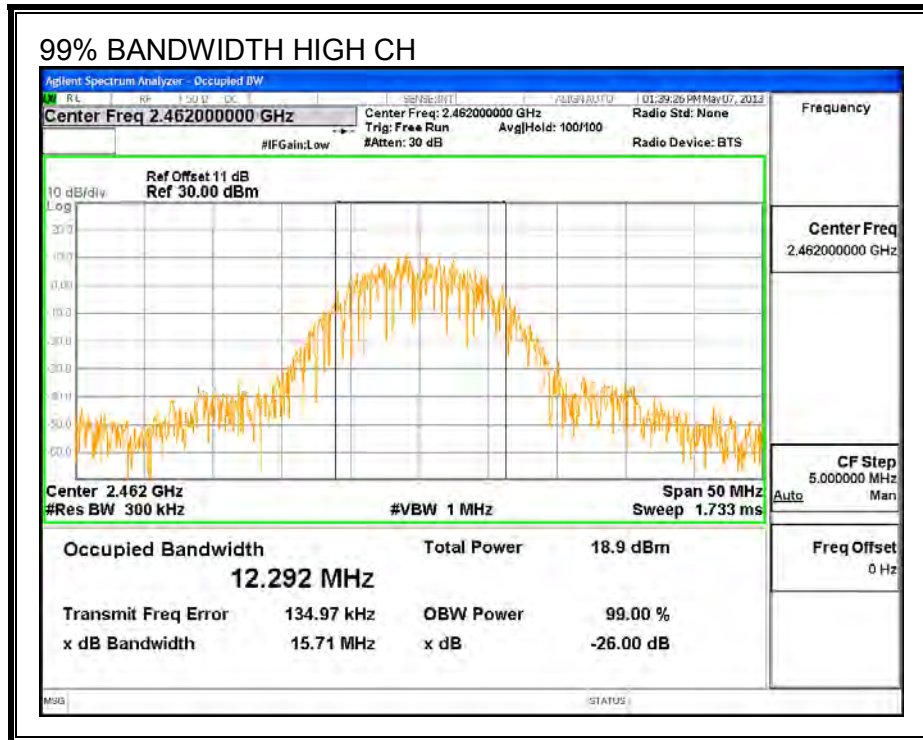

**g mode**

**99% BANDWIDTH**

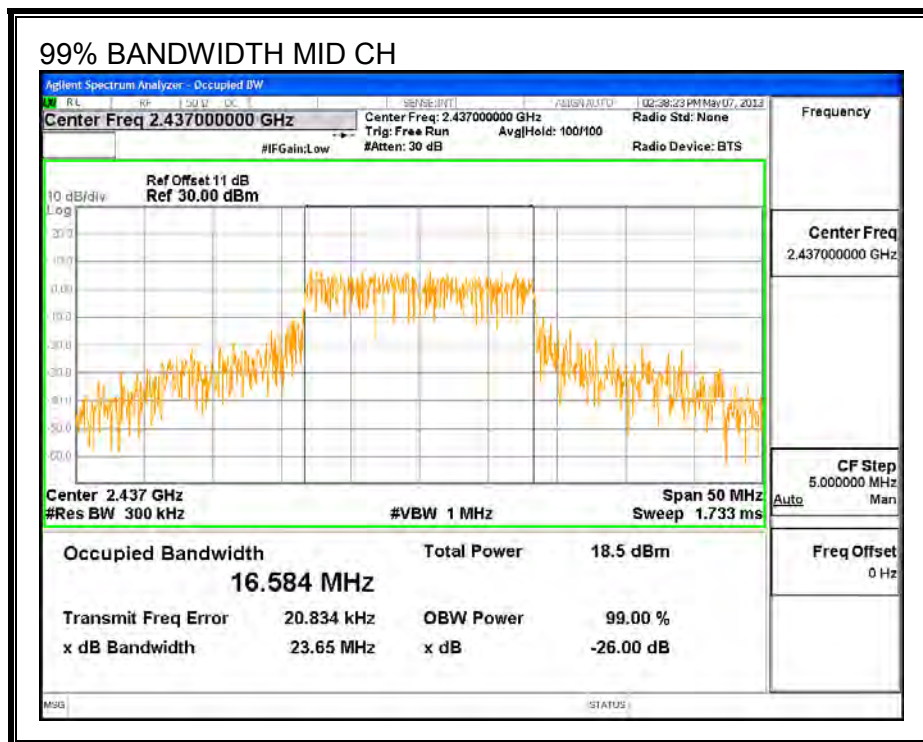
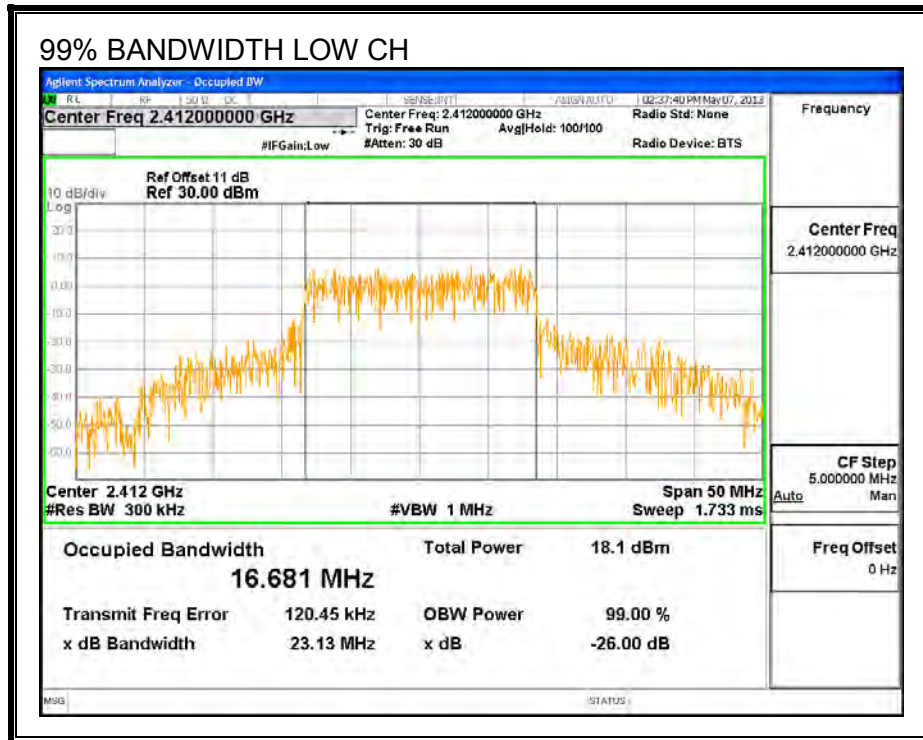


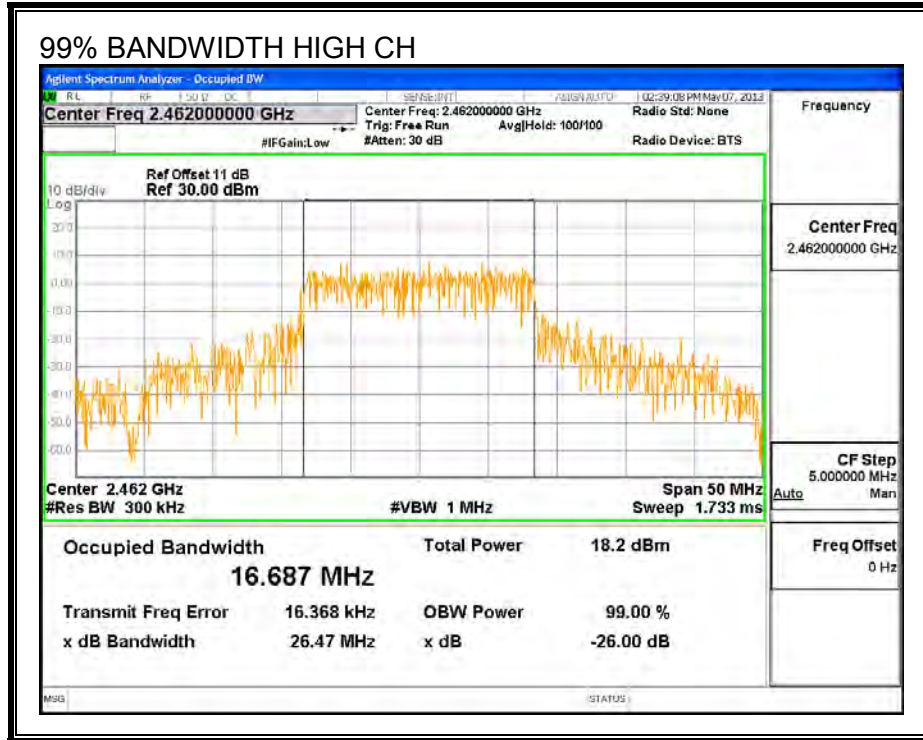




**HT20**

**99% BANDWIDTH**

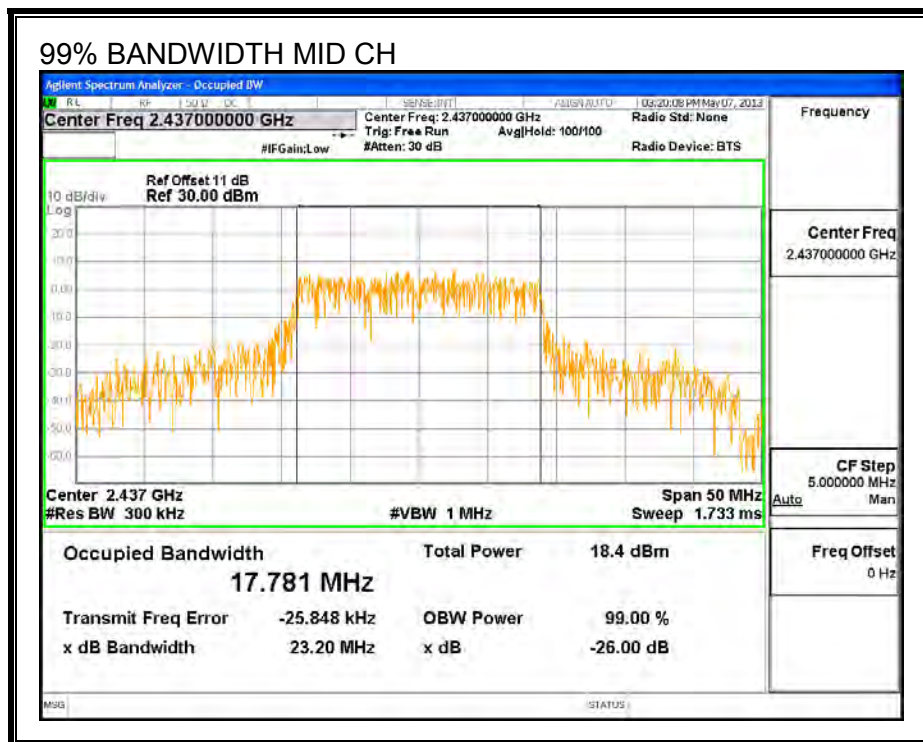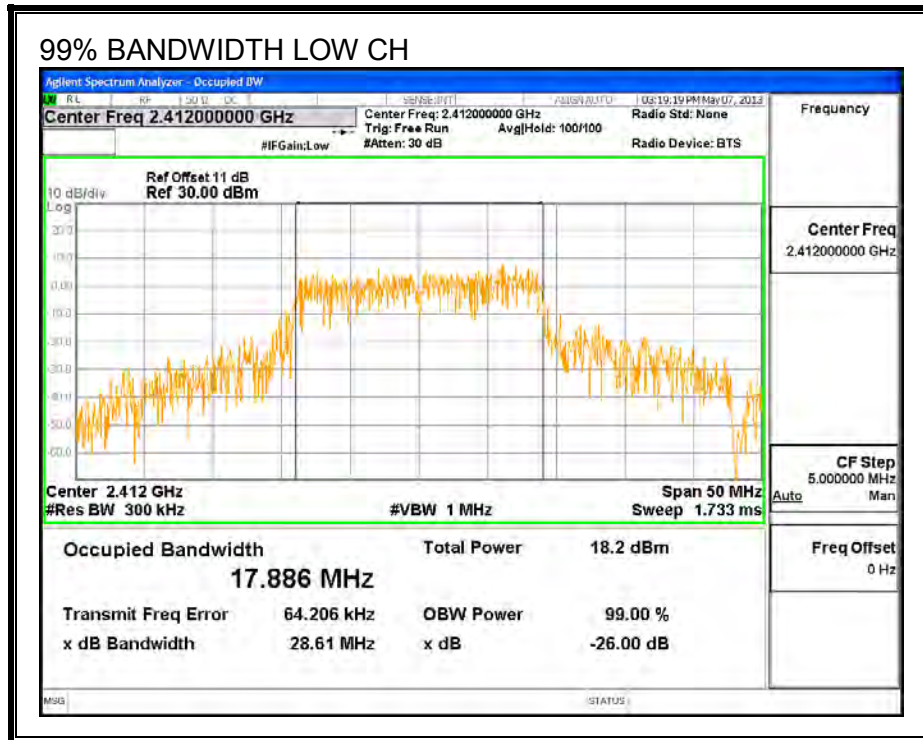

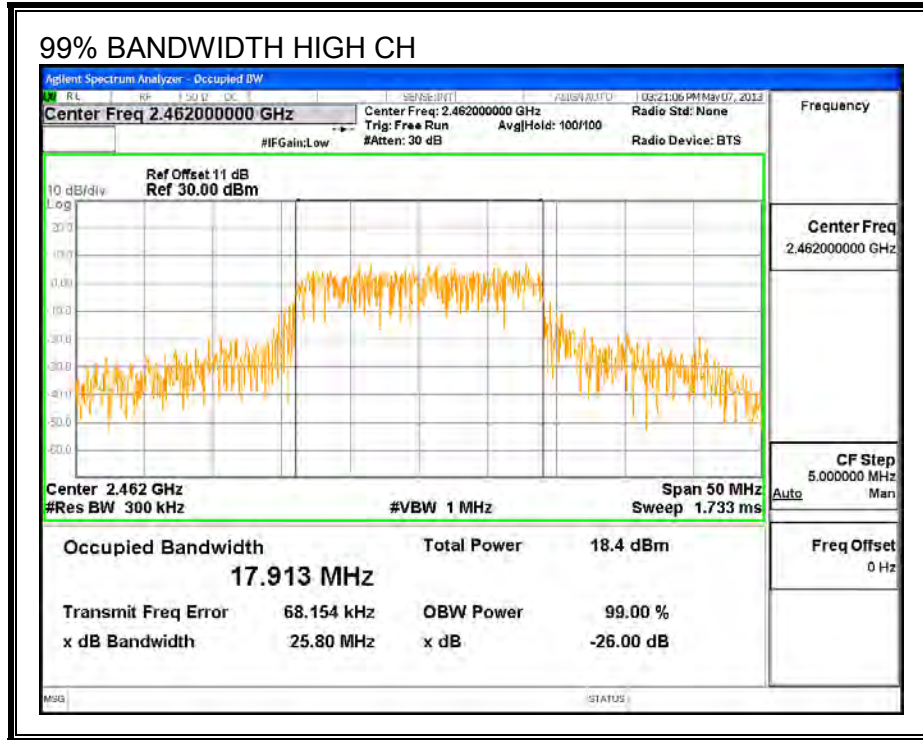

### 7.1.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### RESULTS

##### b mode

| Channel | Frequency (MHz) | Power (dBm) |
|---------|-----------------|-------------|
| Low     | 2412            | 14.50       |
| Mid     | 2437            | 14.62       |
| High    | 2462            | 14.63       |

##### g mode

| Channel | Frequency (MHz) | Power (dBm) |
|---------|-----------------|-------------|
| Low     | 2412            | 14.54       |
| Mid     | 2437            | 14.64       |
| High    | 2462            | 14.57       |

##### HT20

| Channel | Frequency (MHz) | Power (dBm) |
|---------|-----------------|-------------|
| Low     | 2412            | 14.54       |
| Mid     | 2437            | 14.65       |
| High    | 2462            | 14.57       |

#### **7.1.4. OUTPUT POWER**

##### **LIMITS**

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**b mode**

**Limits**

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 2412               | 1.09                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid     | 2437               | 1.09                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 2462               | 1.09                         | 30.00                          | 30                            | 36                           | 30.00                 |

**Results**

| Channel | Frequency<br>(MHz) | Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|------------------------|-----------------------------------|-------------------------|----------------|
| Low     | 2412               | 17.135                 | 17.14                             | 30.00                   | -12.87         |
| Mid     | 2437               | 17.238                 | 17.24                             | 30.00                   | -12.76         |
| High    | 2462               | 17.136                 | 17.14                             | 30.00                   | -12.86         |

**g mode**

**Limits**

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 2412               | 1.09                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid     | 2437               | 1.09                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 2462               | 1.09                         | 30.00                          | 30                            | 36                           | 30.00                 |

**Results**

| Channel | Frequency<br>(MHz) | Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|------------------------|-----------------------------------|-------------------------|----------------|
| Low     | 2412               | 22.647                 | 22.65                             | 30.00                   | -7.35          |
| Mid     | 2437               | 23.095                 | 23.10                             | 30.00                   | -6.91          |
| High    | 2462               | 23.161                 | 23.16                             | 30.00                   | -6.84          |

**HT20**

**Limits**



| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 2412               | 1.09                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid     | 2437               | 1.09                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 2462               | 1.09                         | 30.00                          | 30                            | 36                           | 30.00                 |


**Results**

| Channel | Frequency<br>(MHz) | Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|------------------------|-----------------------------------|-------------------------|----------------|
| Low     | 2412               | 22.600                 | 22.60                             | 30.00                   | -7.40          |
| Mid     | 2437               | 23.041                 | 23.04                             | 30.00                   | -6.96          |
| High    | 2462               | 22.855                 | 22.86                             | 30.00                   | -7.15          |

**b mode**

**OUTPUT POWER**

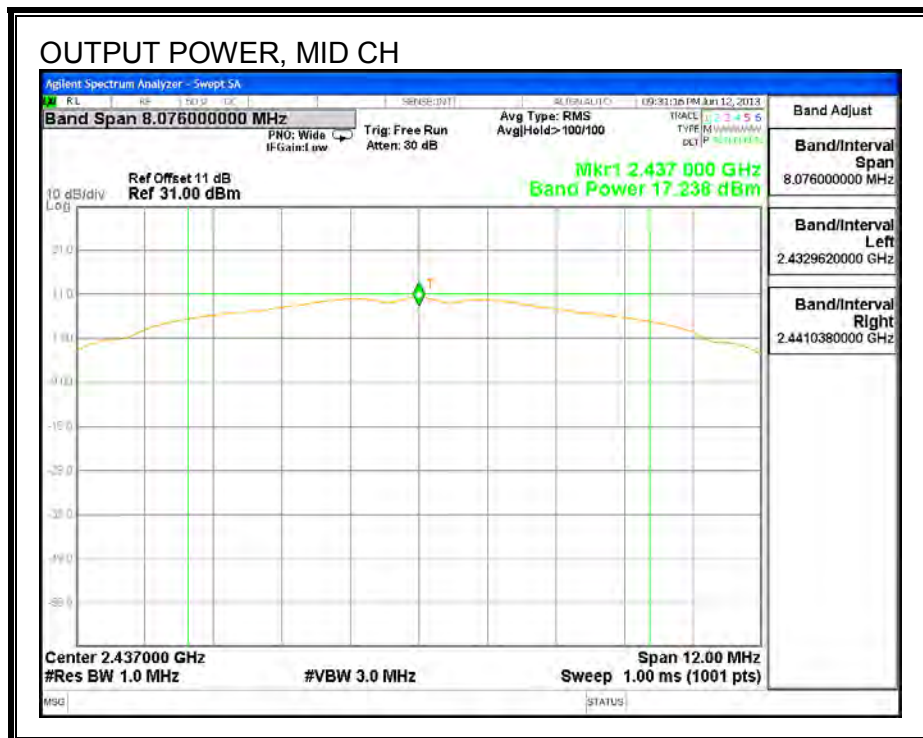
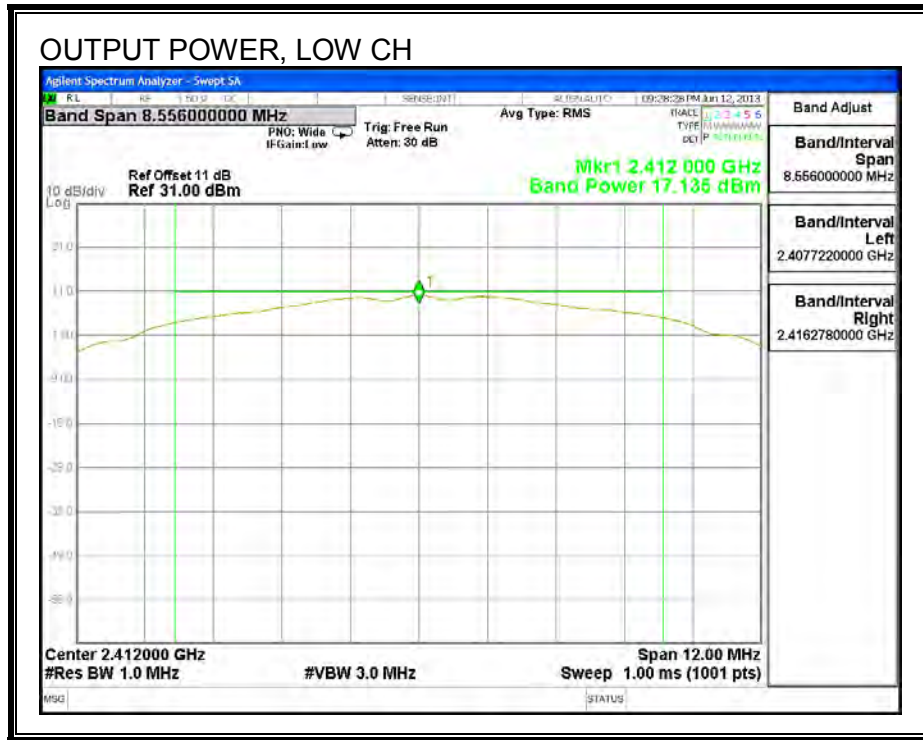


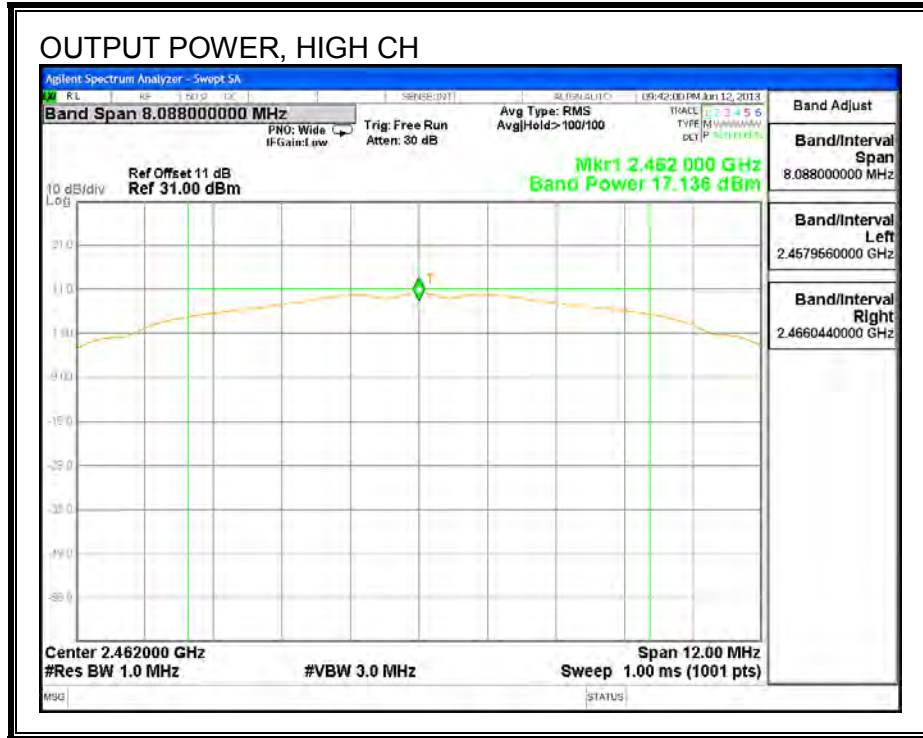




**g mode**



**OUTPUT POWER**

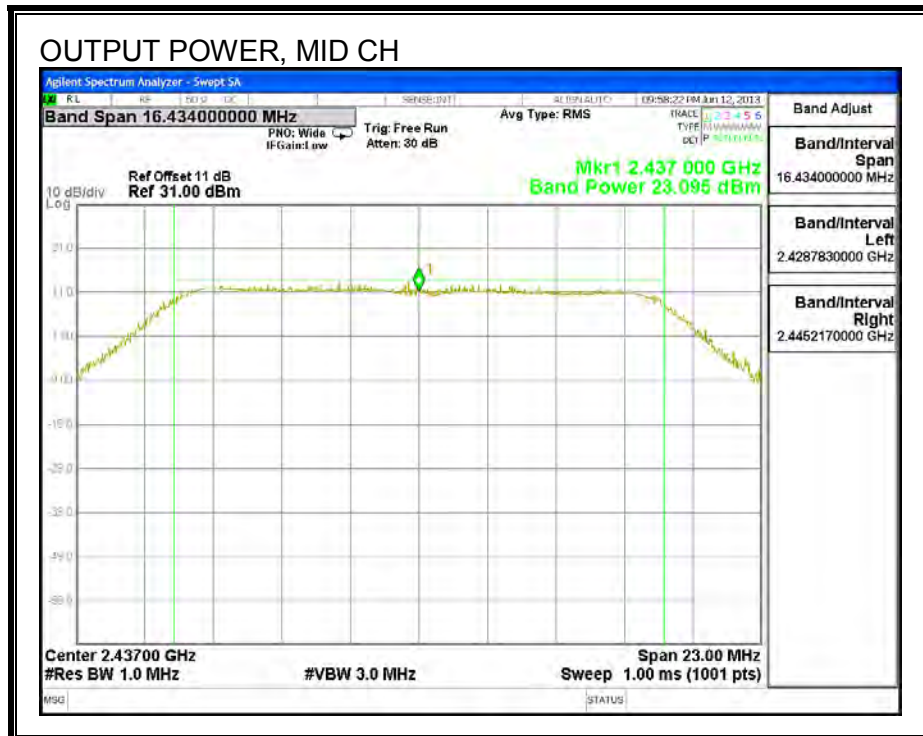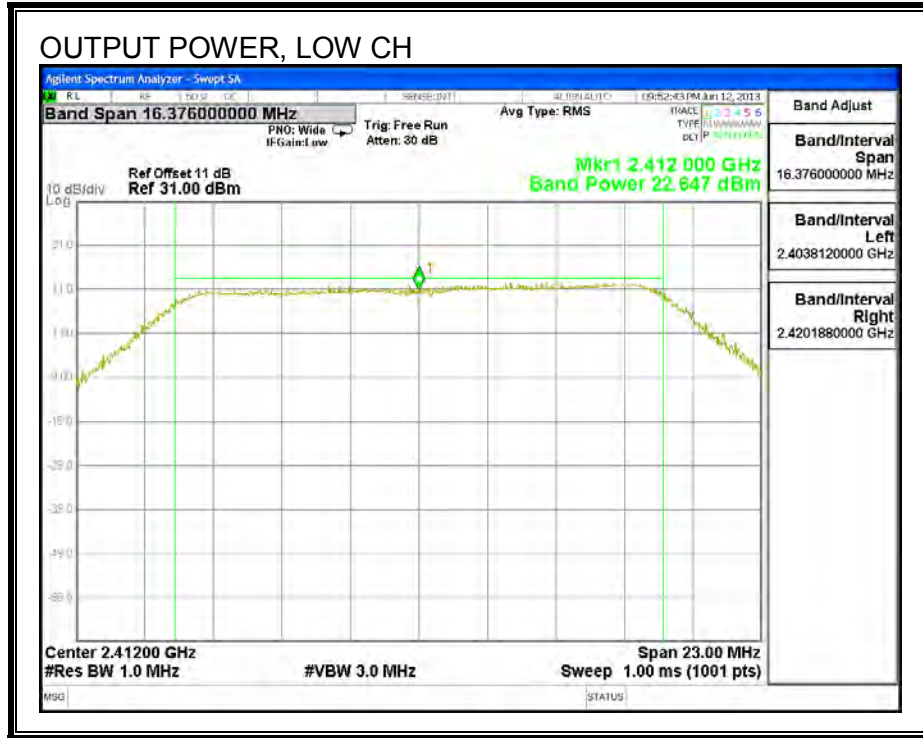


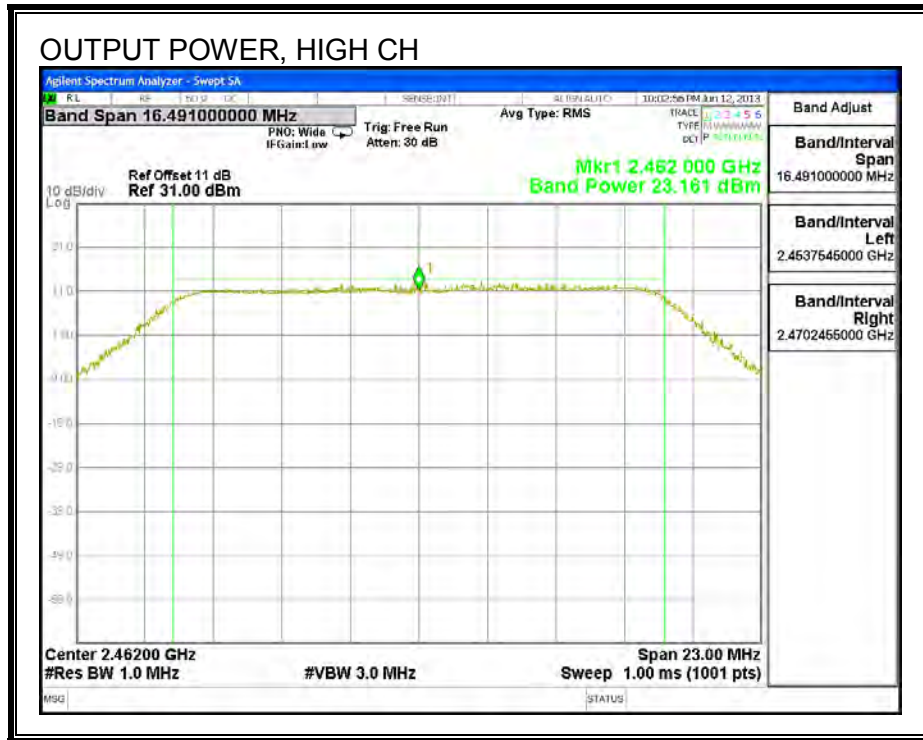

**HT20**

**OUTPUT POWER**

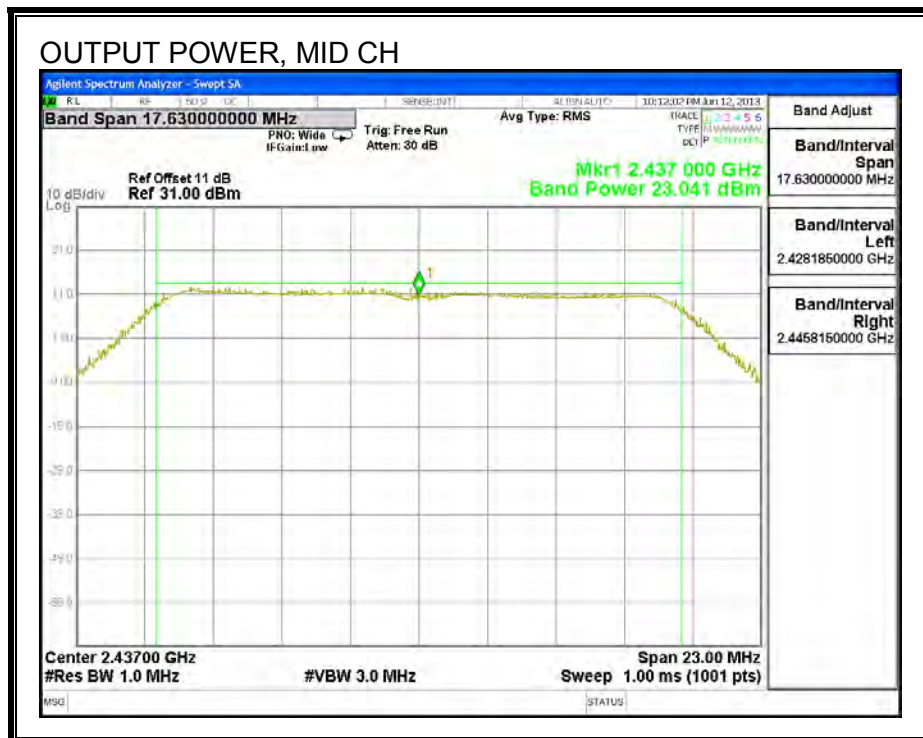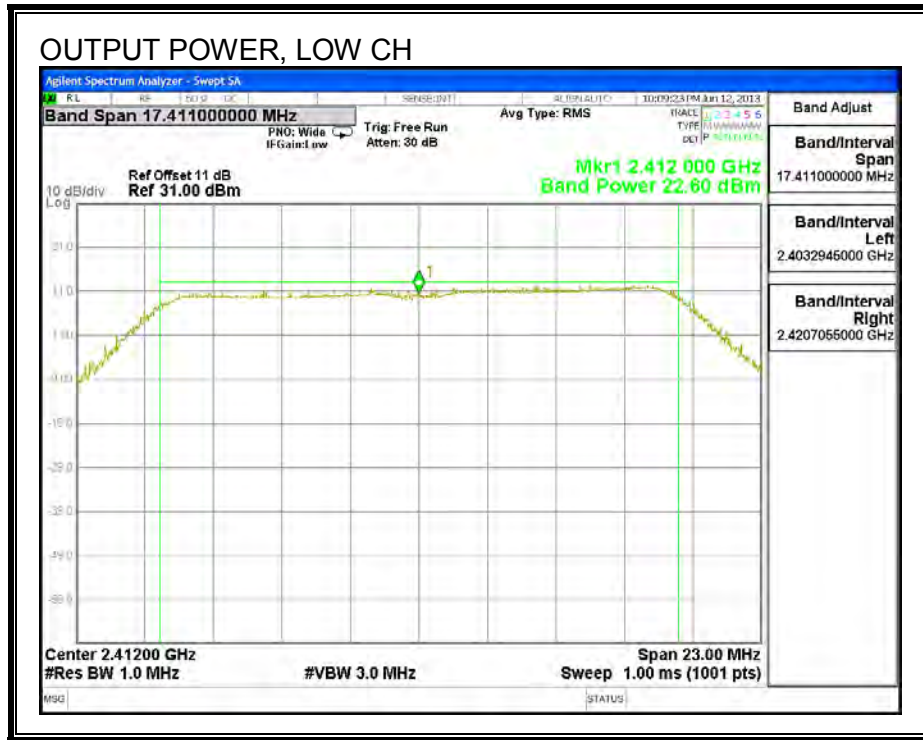

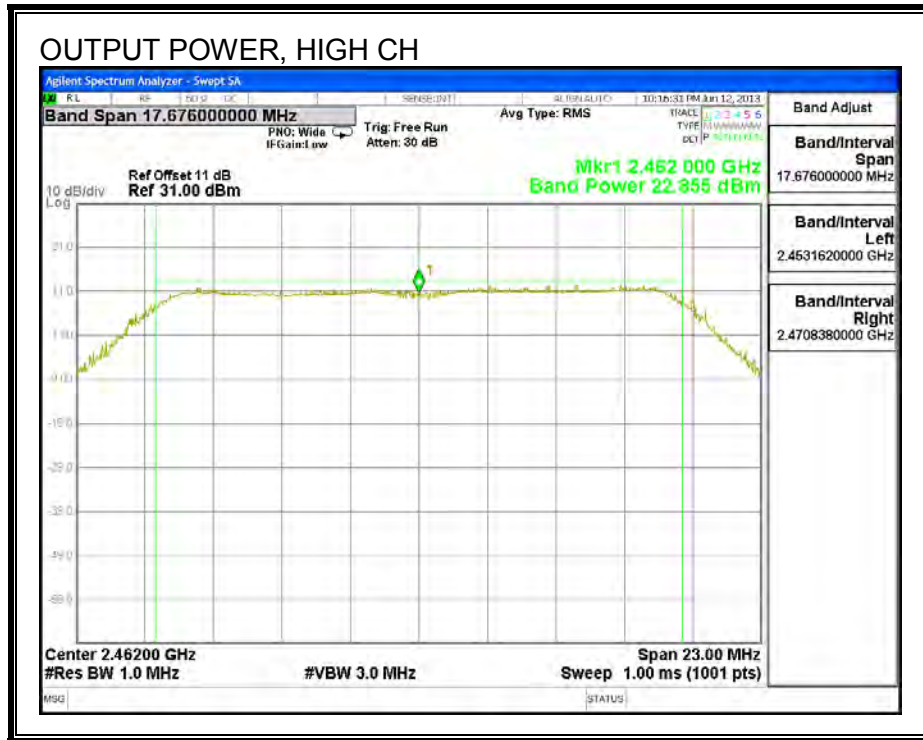

**7.1.5. PSD**

**LIMITS**

FCC §15.247

IC RSS-210 A8.2

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

**RESULTS**

**b mode**

**PSD Results**

| Channel | Frequency<br>(MHz) | Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|---------------|----------------|----------------|
| Low     | 2412               | -2.32         | 8.00           | -10.32         |
| Mid     | 2437               | -2.47         | 8.00           | -10.47         |
| High    | 2462               | -3.07         | 8.00           | -11.07         |

**g mode**

**PSD Results**

| Channel | Frequency<br>(MHz) | Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|---------------|----------------|----------------|
| Low     | 2412               | -7.13         | 8.00           | -15.13         |
| Mid     | 2437               | -6.13         | 8.00           | -14.13         |
| High    | 2462               | -7.04         | 8.00           | -15.04         |



**HT20**


**PSD Results**

| Channel | Frequency<br>(MHz) | Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|---------------|----------------|----------------|
| Low     | 2412               | -6.88         | 8.00           | -14.88         |
| Mid     | 2437               | -6.47         | 8.00           | -14.47         |
| High    | 2462               | -7.02         | 8.00           | -15.02         |

**b mode**



**PSD**

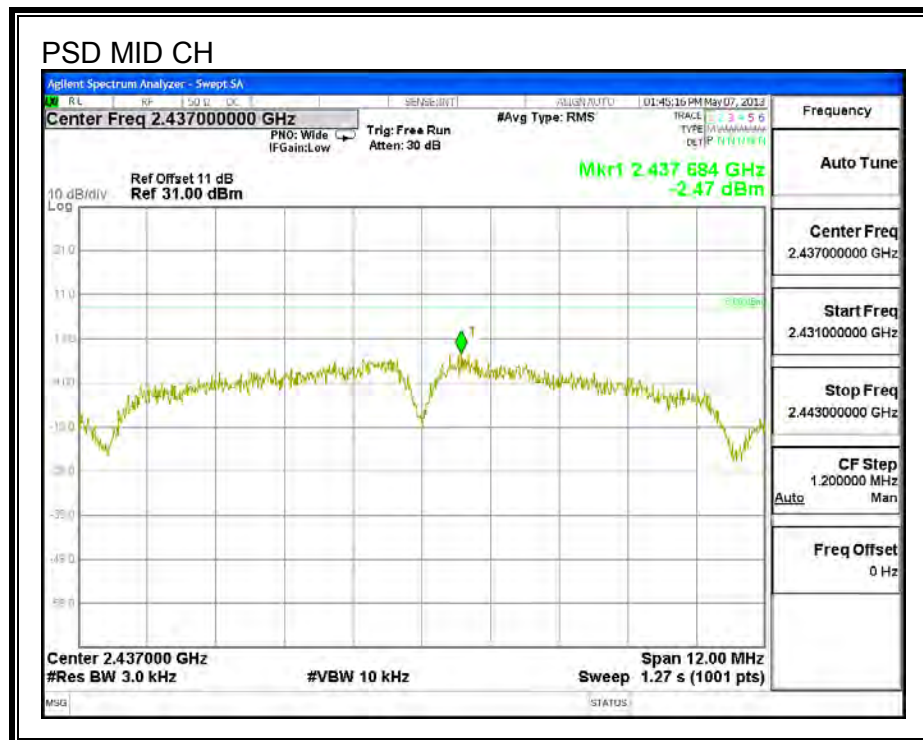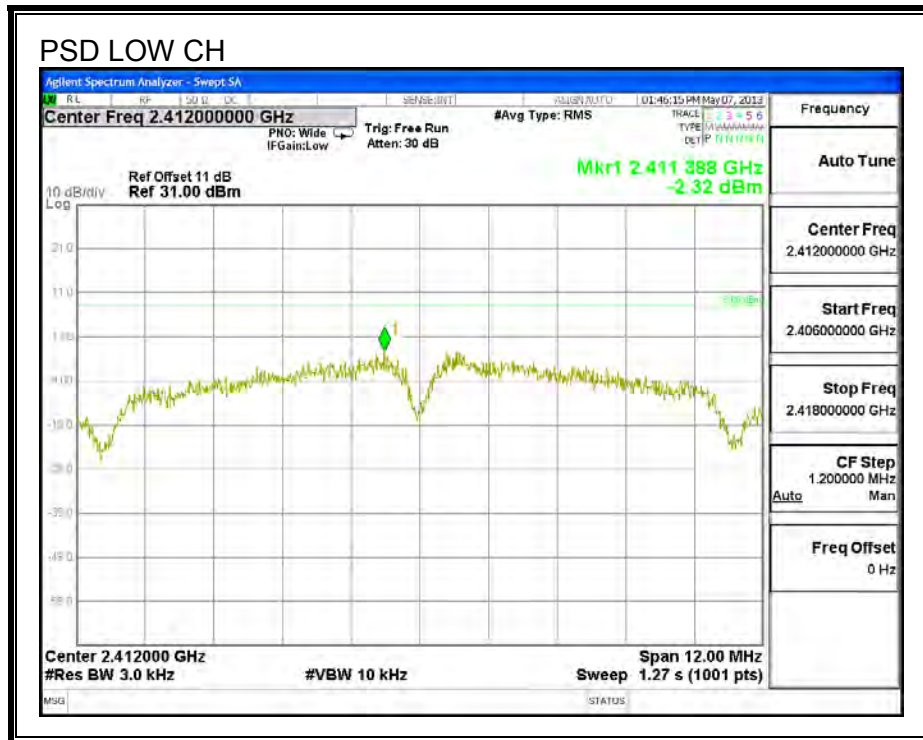

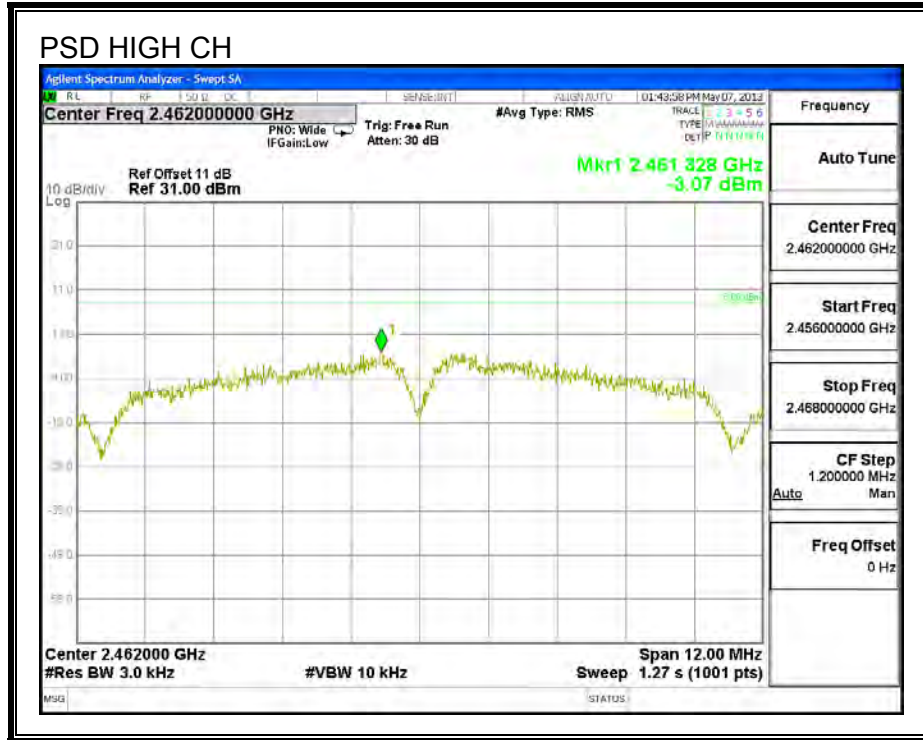


**g mode**

**PSD**

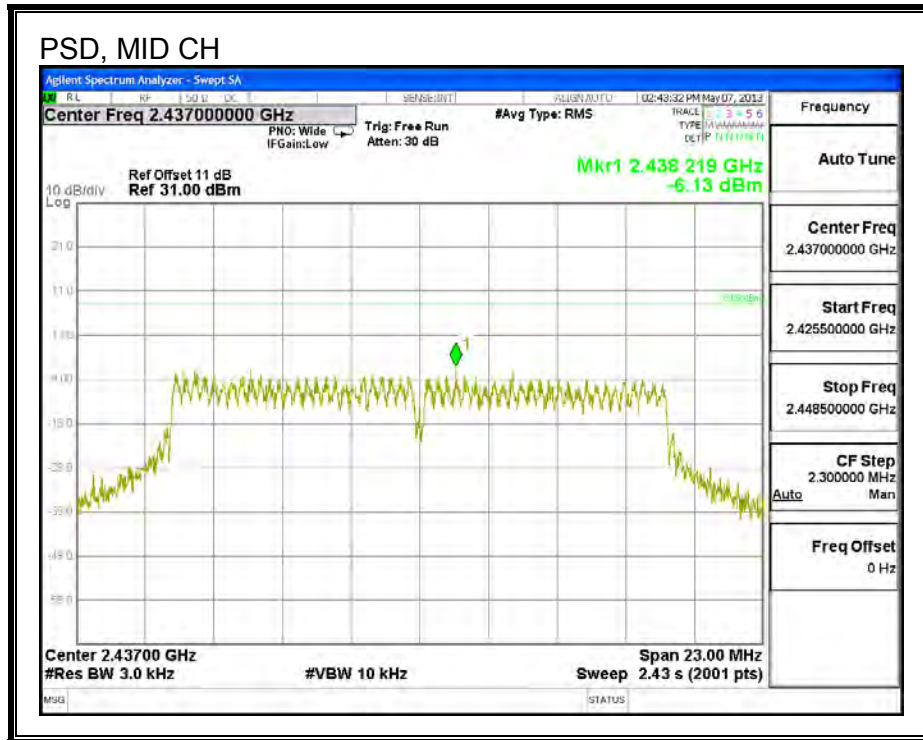
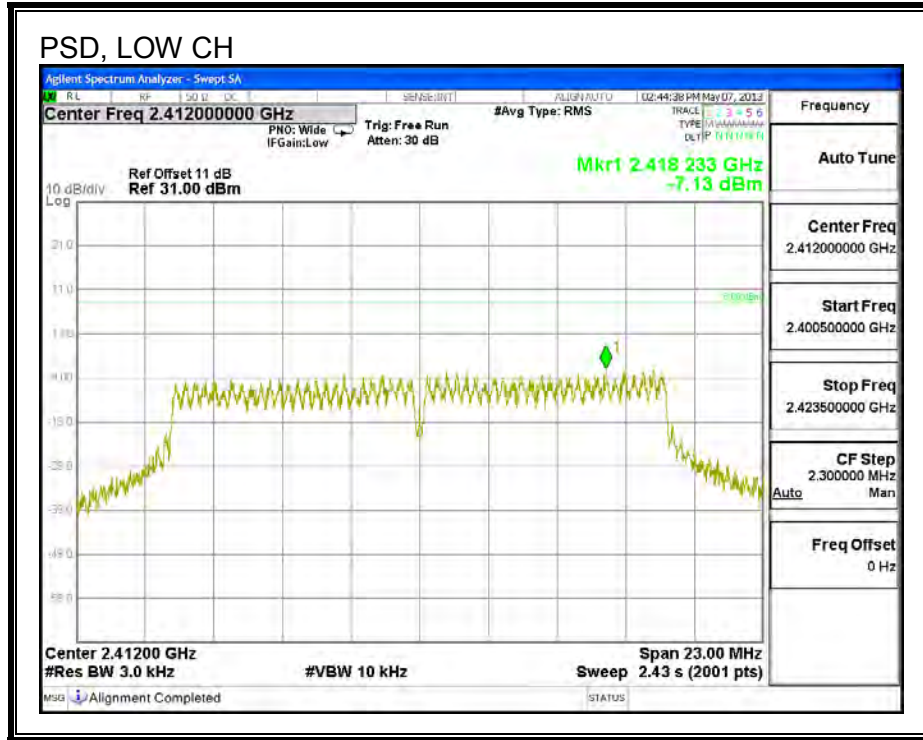





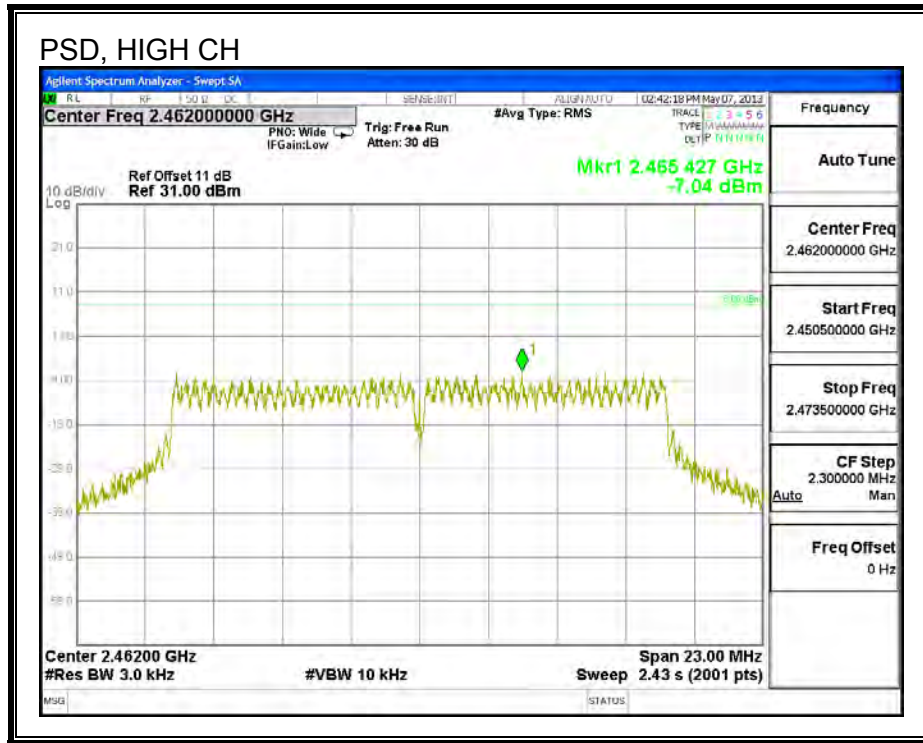

**HT20**

**PSD**

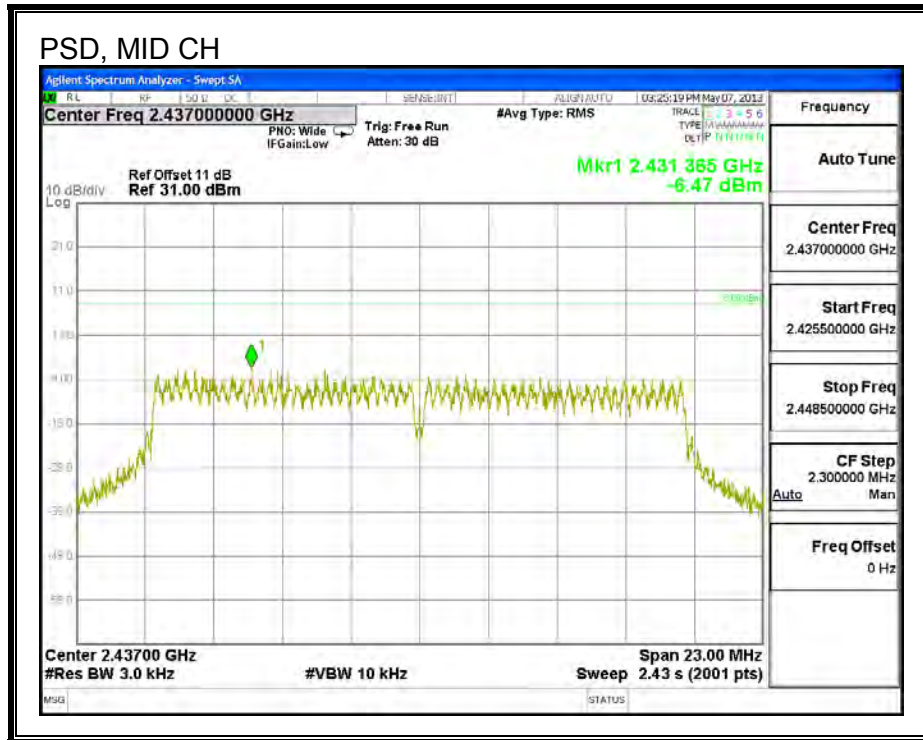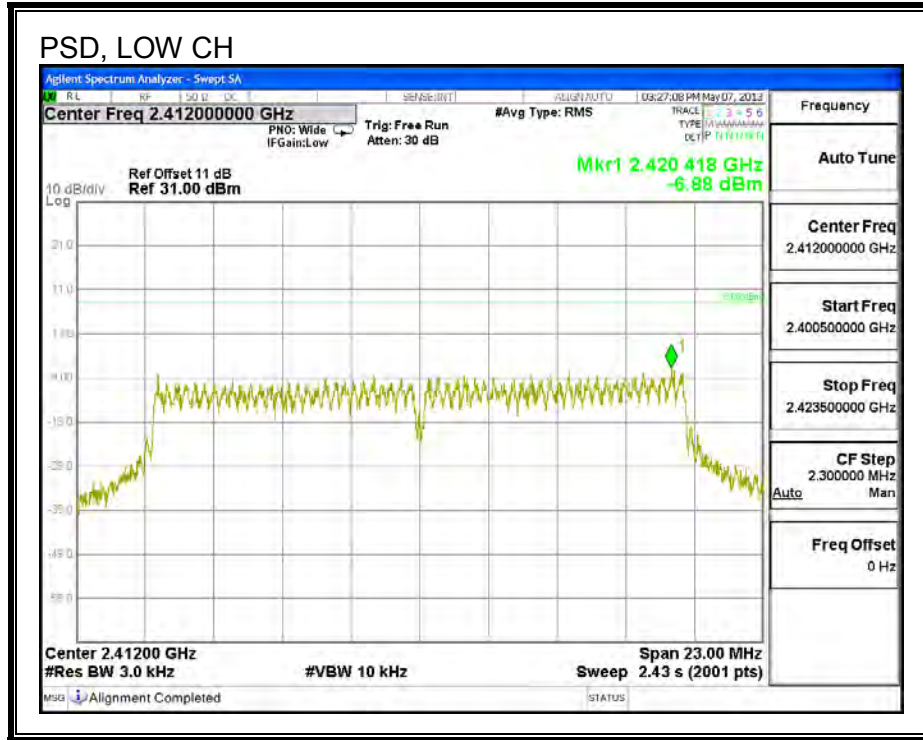

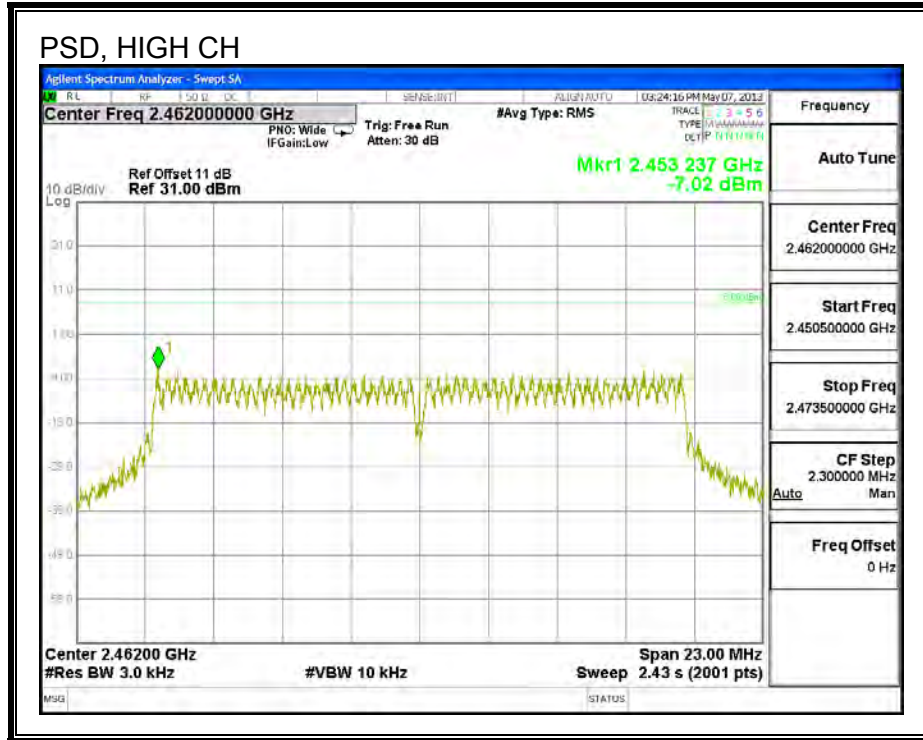

## 7.1.6. OUT-OF-BAND EMISSIONS

### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.


**b mode**

**RESULTS**


**IN-BAND REFERENCE LEVEL**

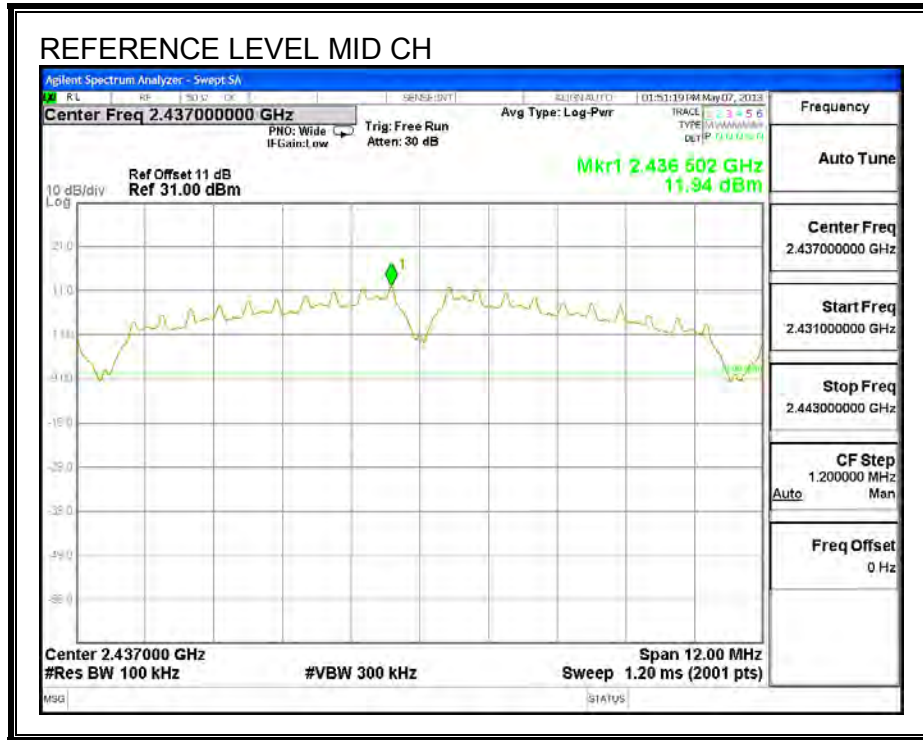



**LOW CHANNEL BANDEDGE**

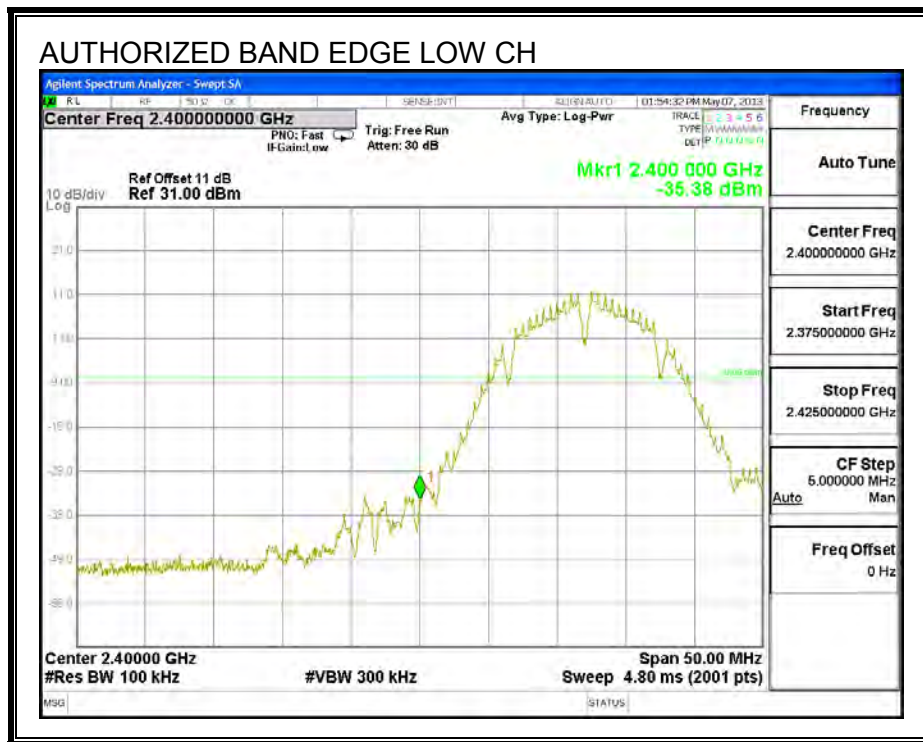


**HIGH CHANNEL BANDEDGE**

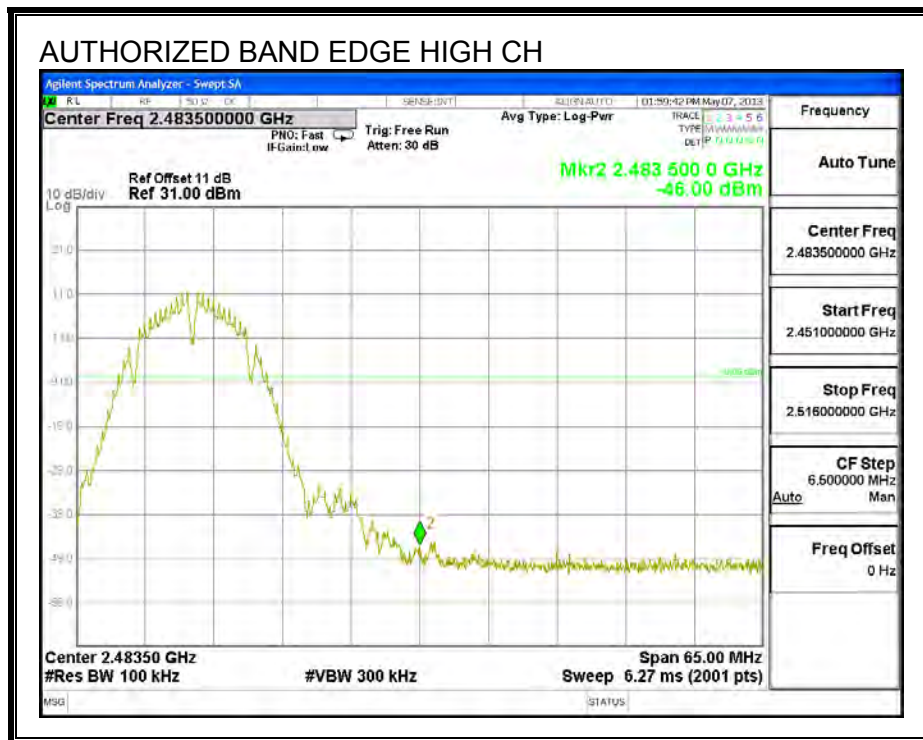

**OUT-OF-BAND EMISSIONS**

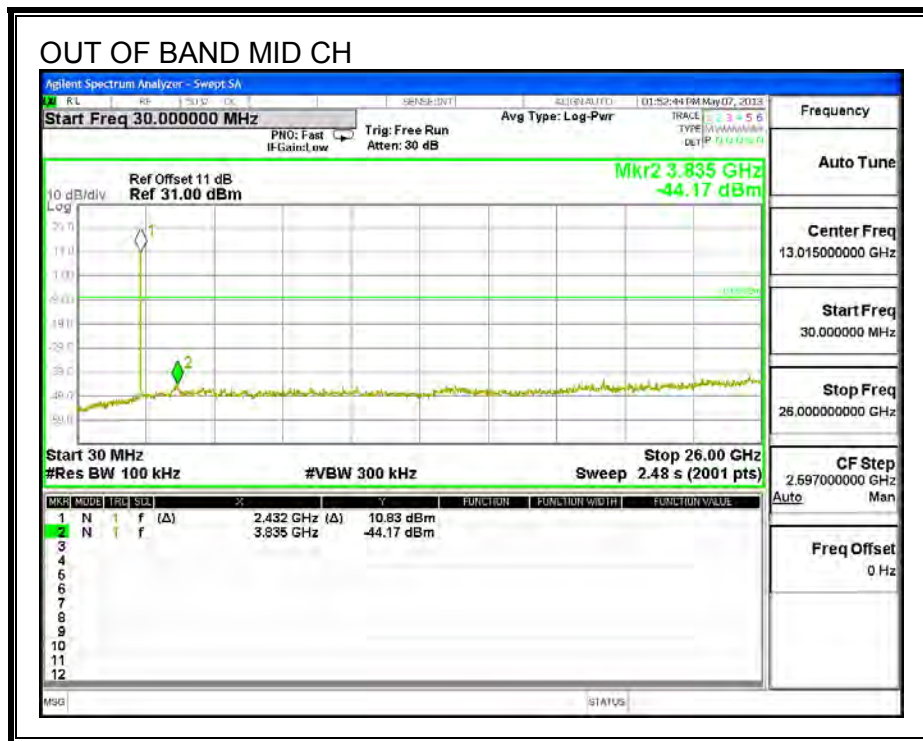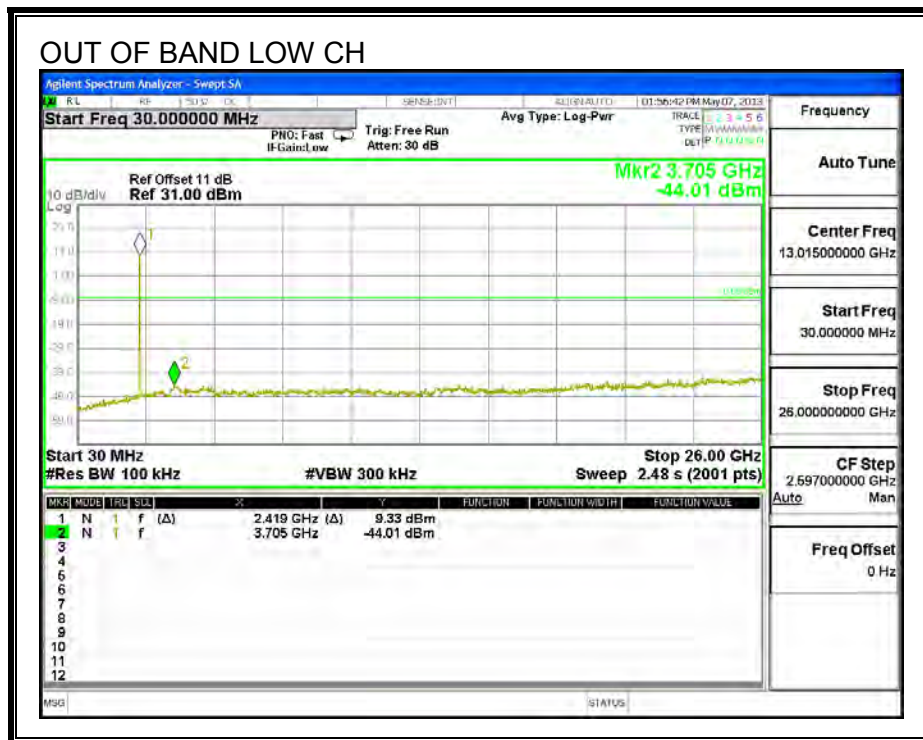

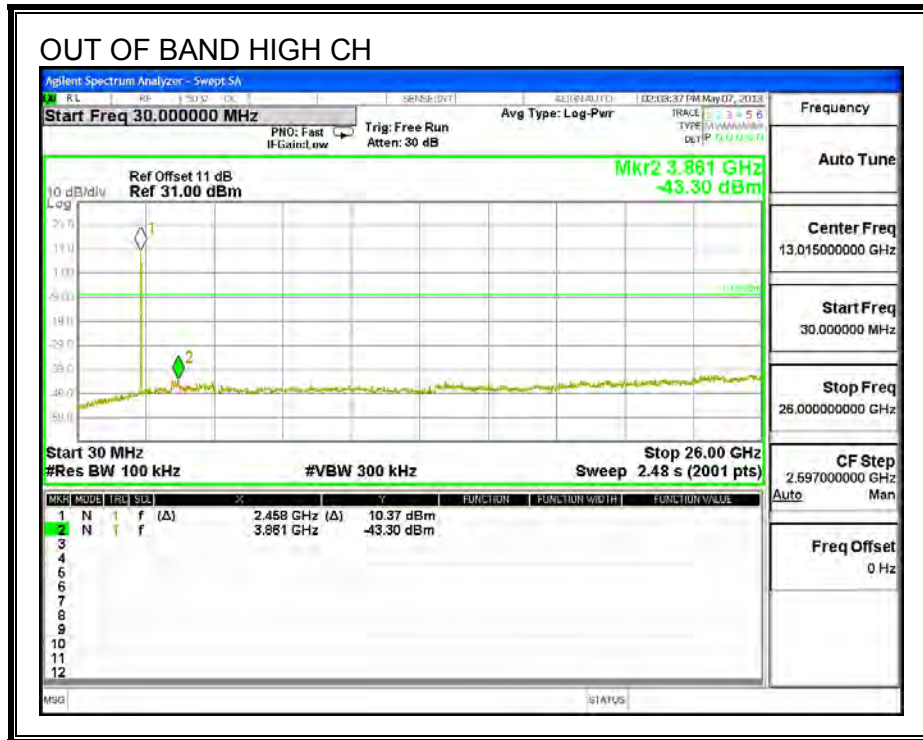





**g mode**

**RESULTS**


**IN-BAND REFERENCE LEVEL**

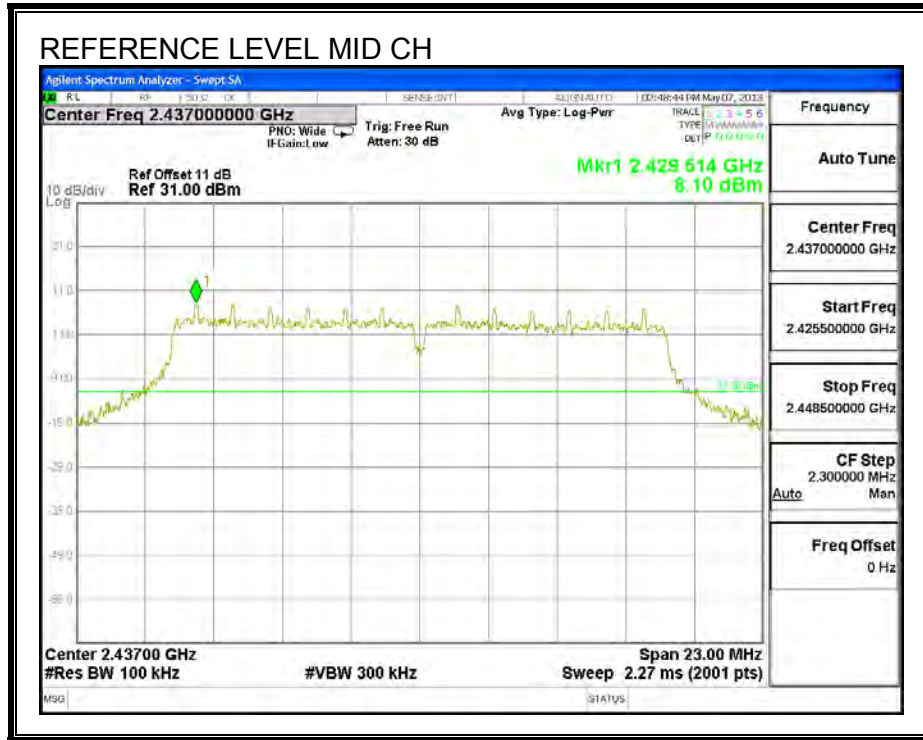



**LOW CHANNEL BANDEDGE**

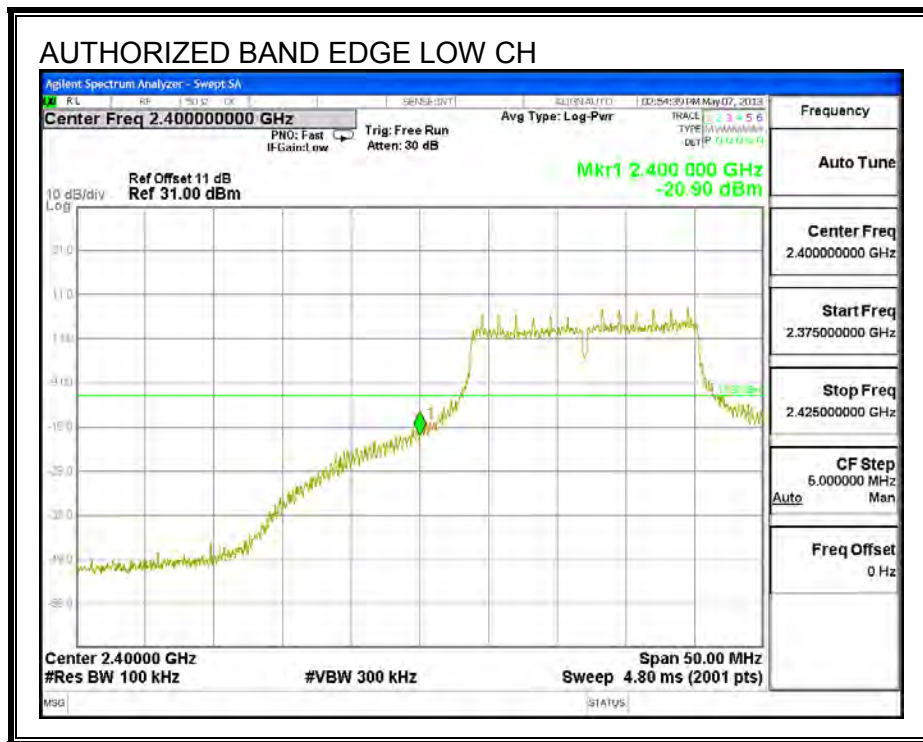


**HIGH CHANNEL BANDEDGE**

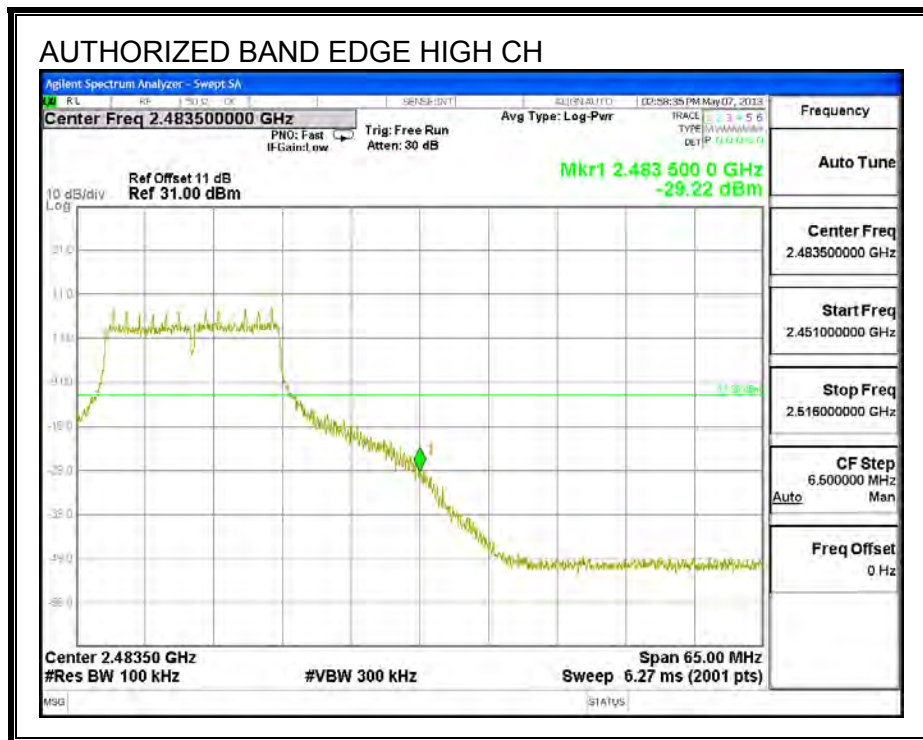

**OUT-OF-BAND EMISSIONS**

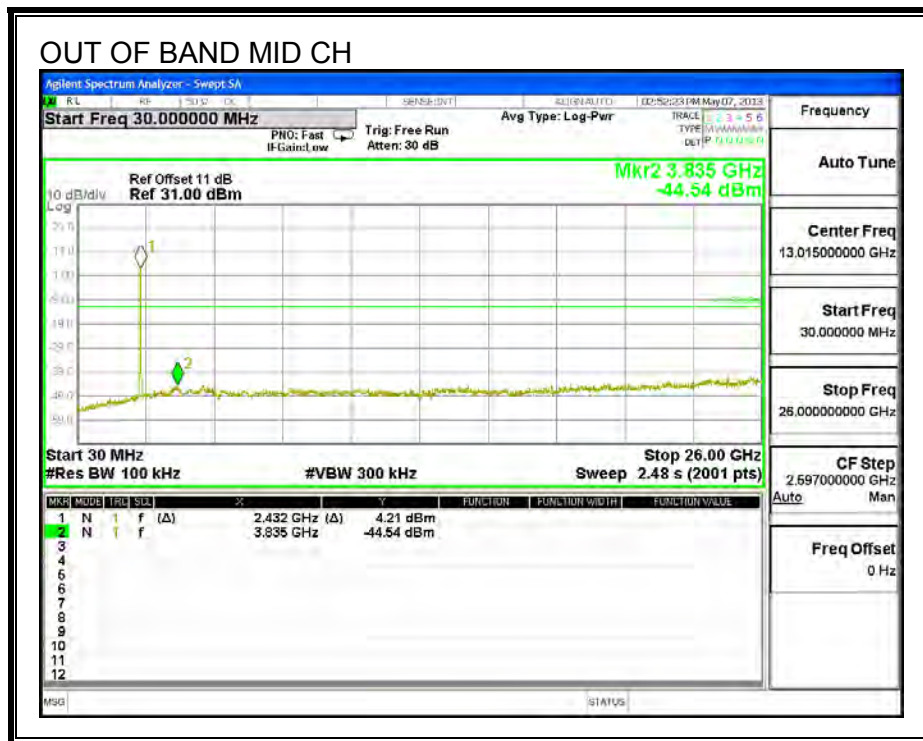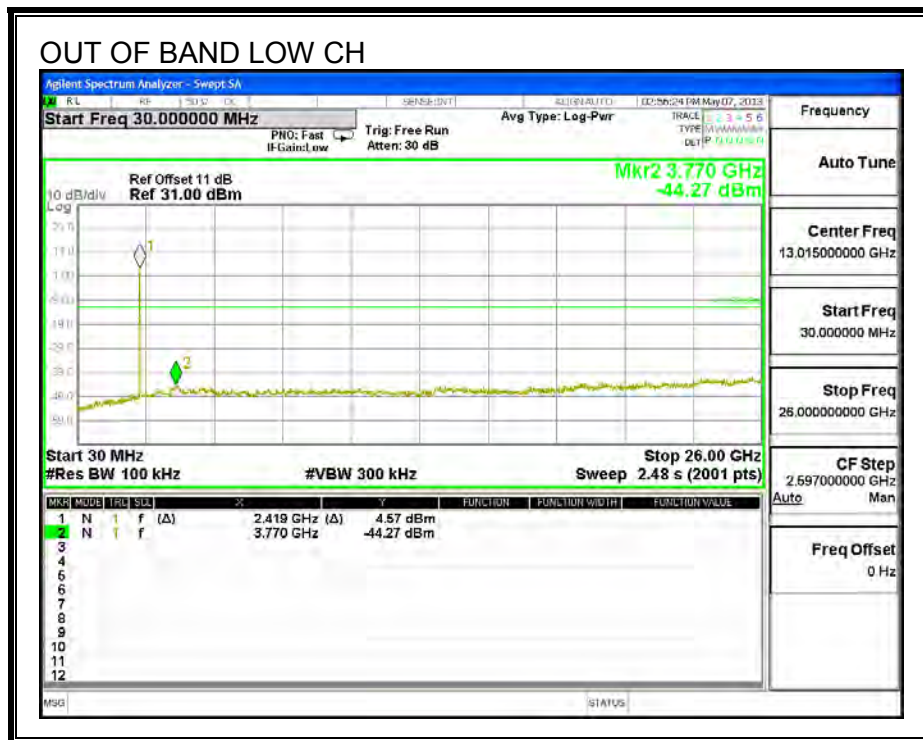


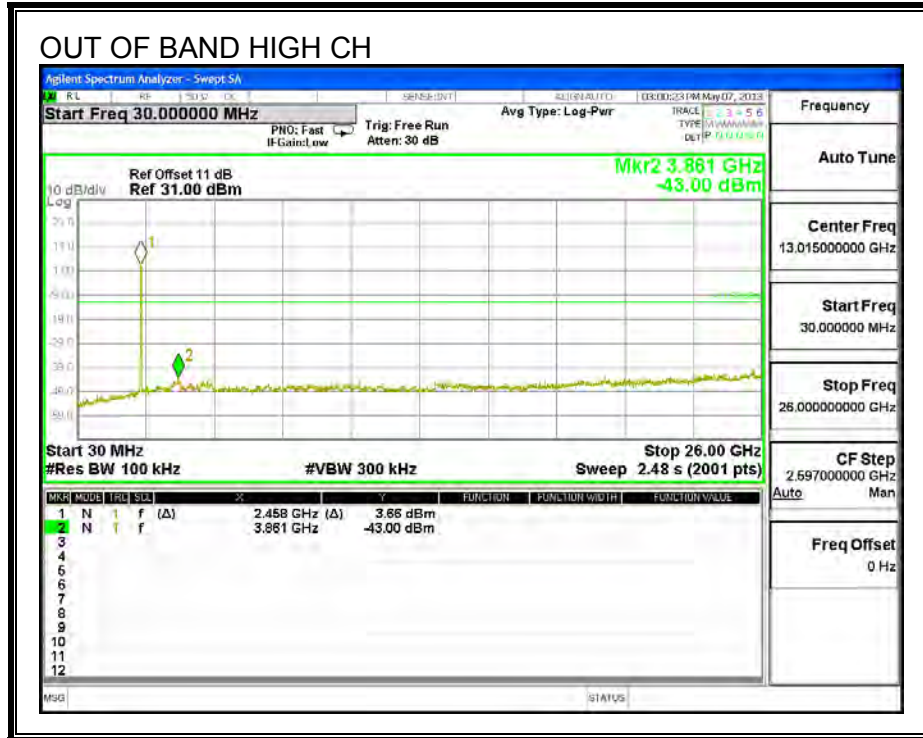


**HT20**

**RESULTS**


**IN-BAND REFERENCE LEVEL**

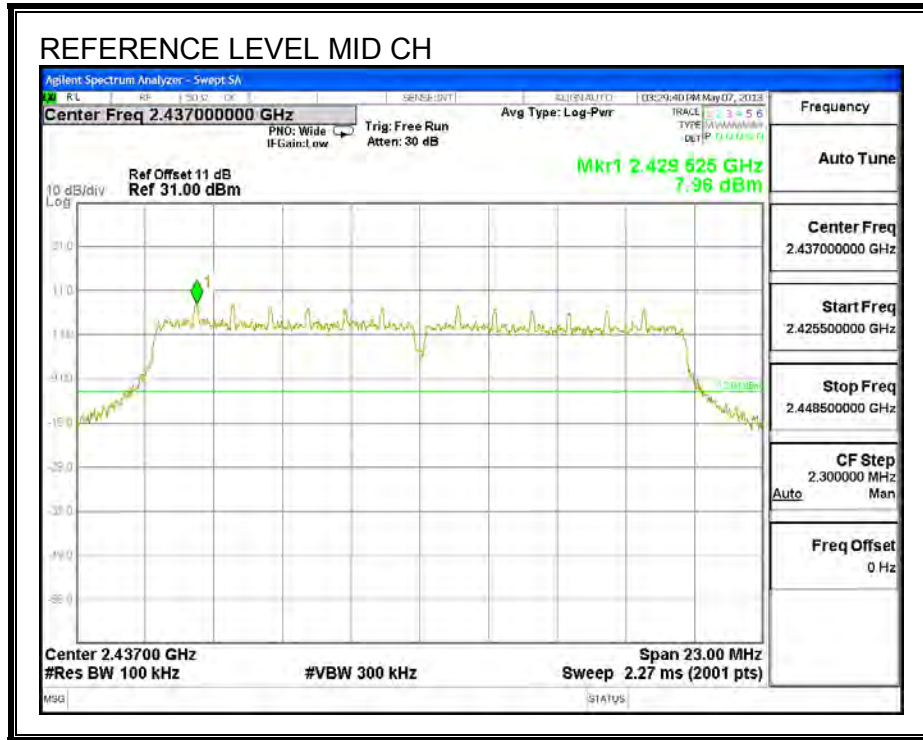



**LOW CHANNEL BANDEDGE**

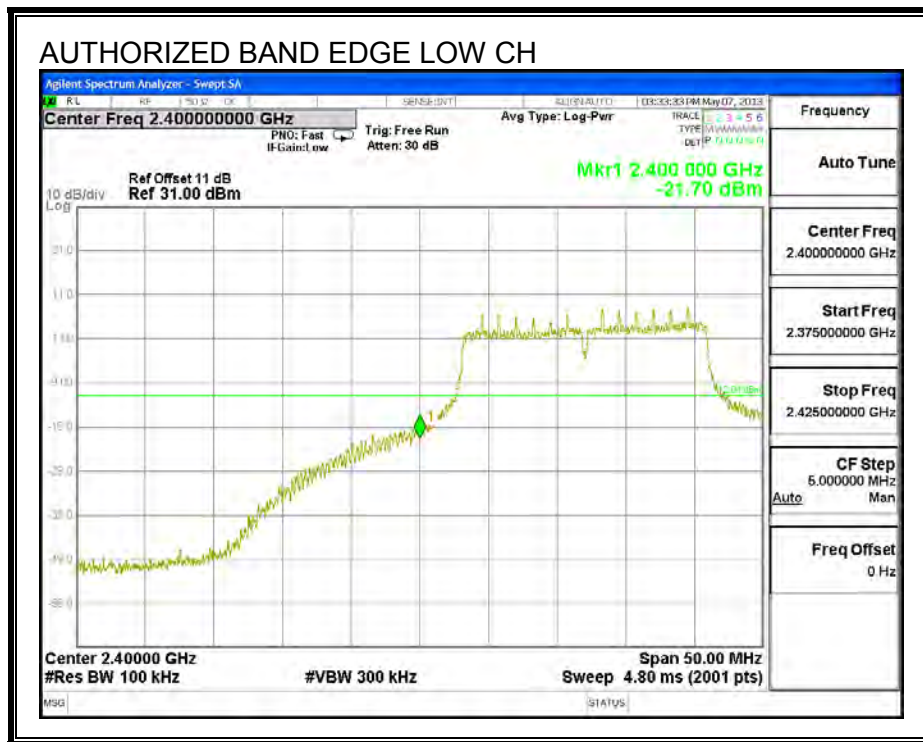


**HIGH CHANNEL BANDEDGE**

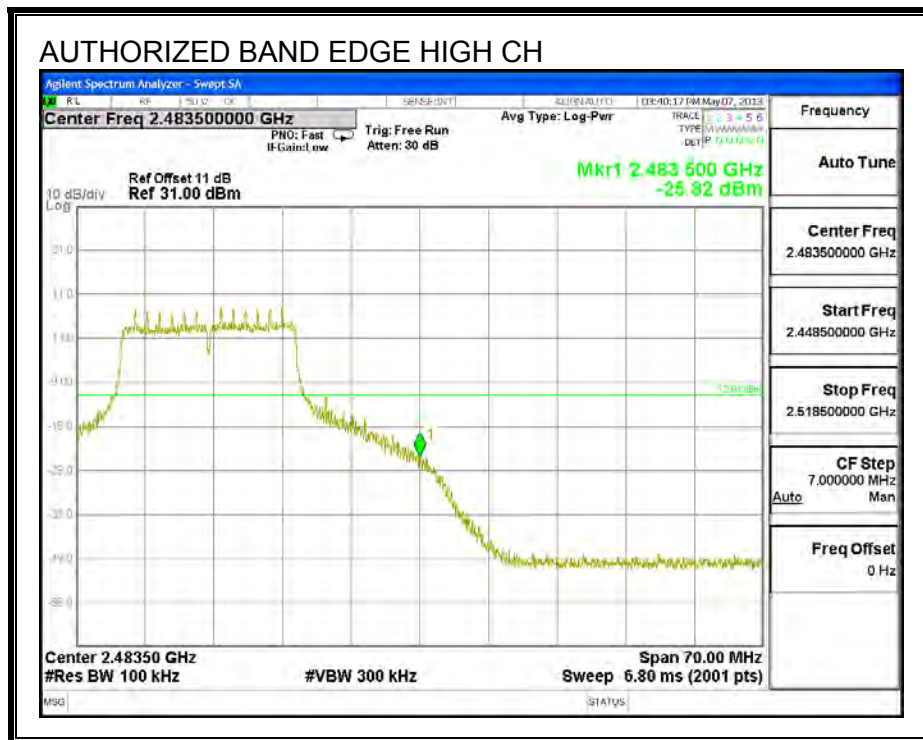

**OUT-OF-BAND EMISSIONS**

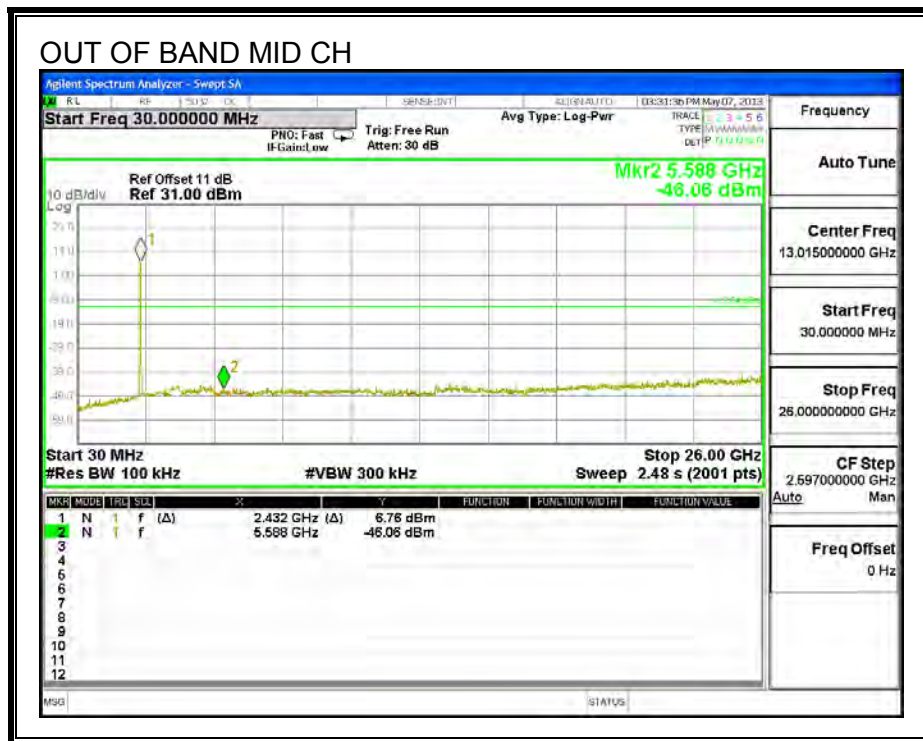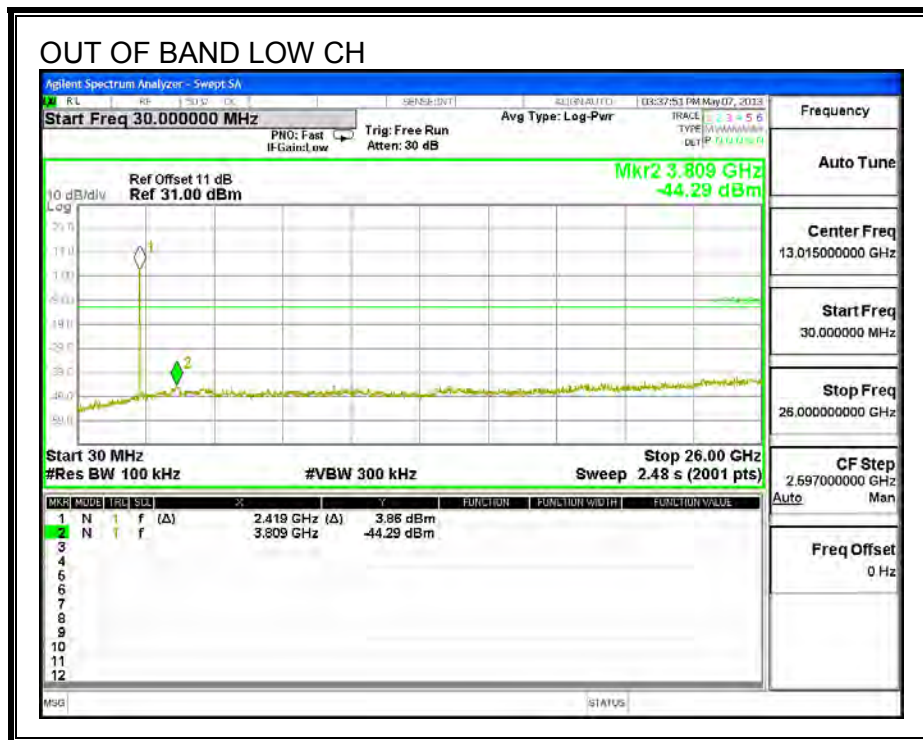

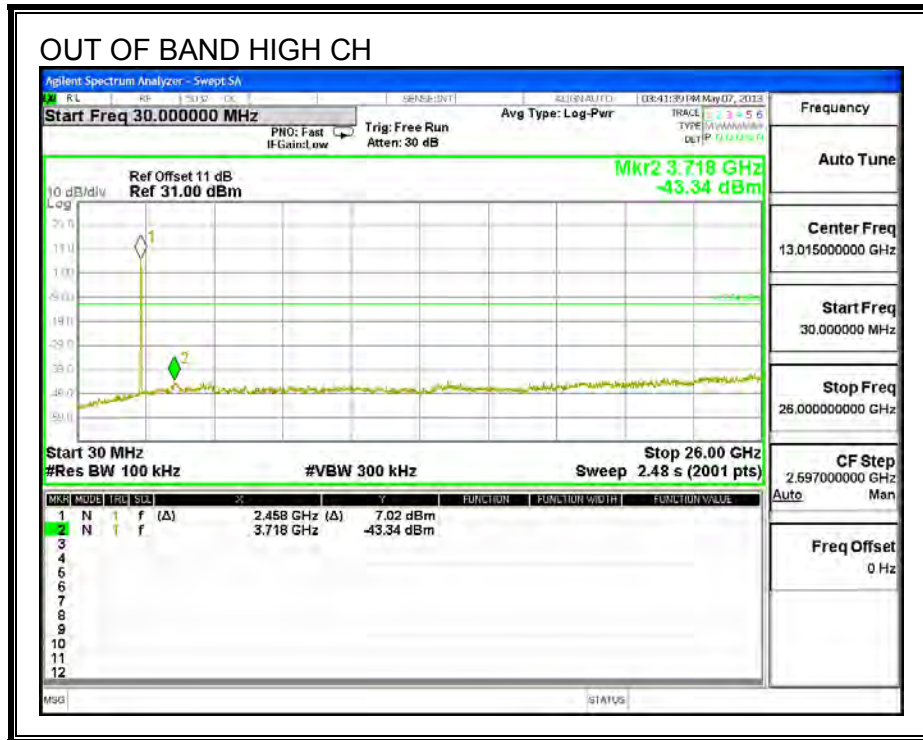



## 7.2. 5.8 GHz BAND

### 7.2.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

#### RESULTS

##### a mode

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low     | 5745            | 15.111               | 0.5                 |
| Mid     | 5785            | 15.111               | 0.5                 |
| High    | 5825            | 15.295               | 0.5                 |

##### HT20



| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low     | 5745            | 15.134               | 0.5                 |
| Mid     | 5785            | 15.123               | 0.5                 |
| High    | 5825            | 15.065               | 0.5                 |


##### HT40

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low     | 5755            | 32.591               | 0.5                 |
| High    | 5795            | 35.144               | 0.5                 |

**a mode**



**6 dB BANDWIDTH**

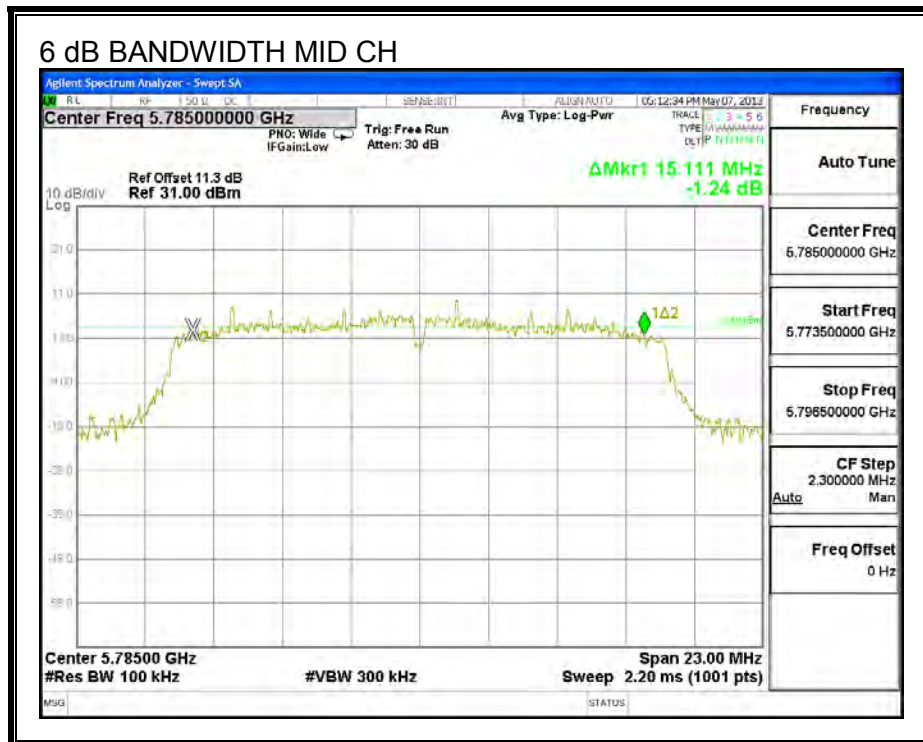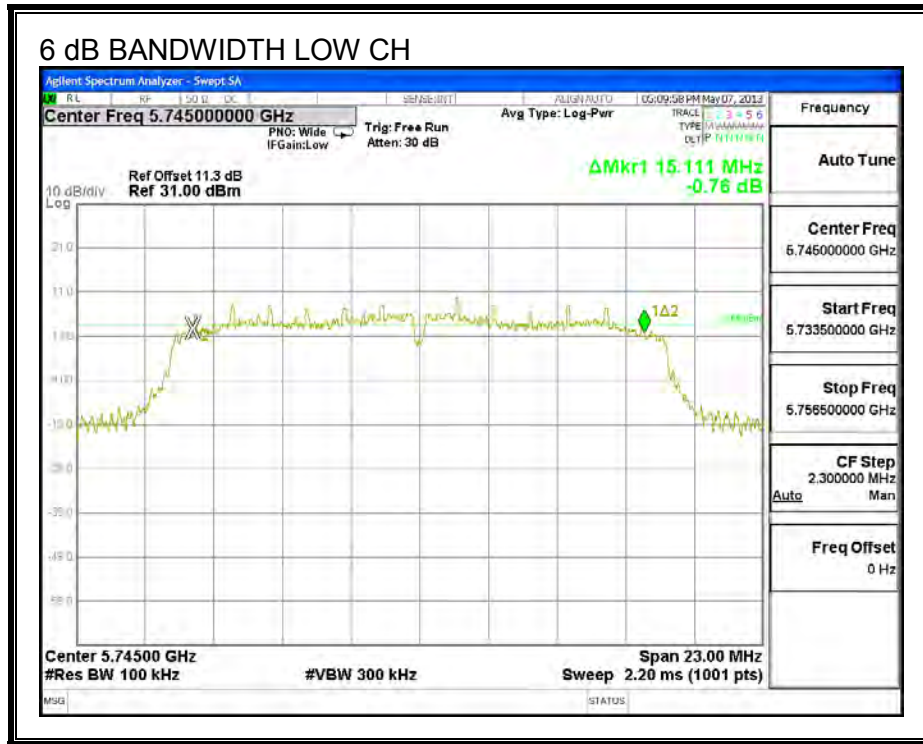


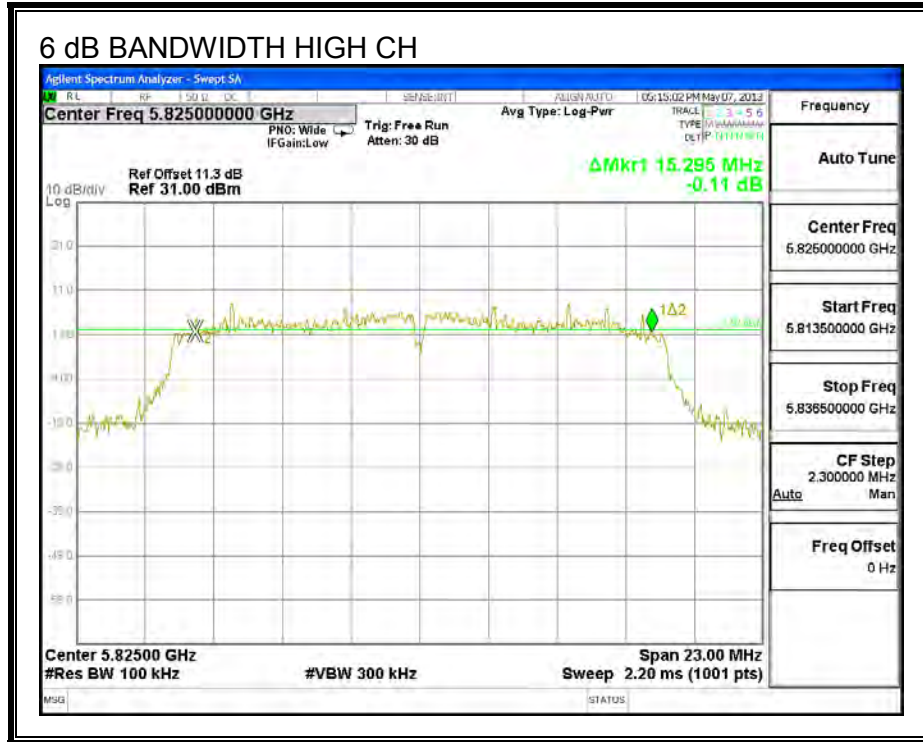

**HT20**



**6 dB BANDWIDTH**

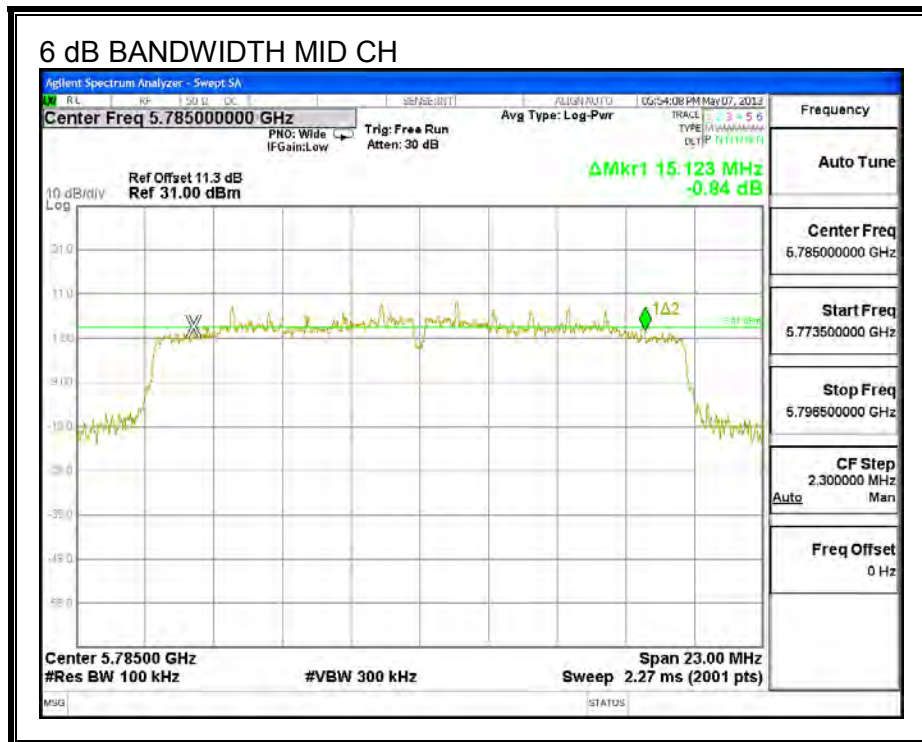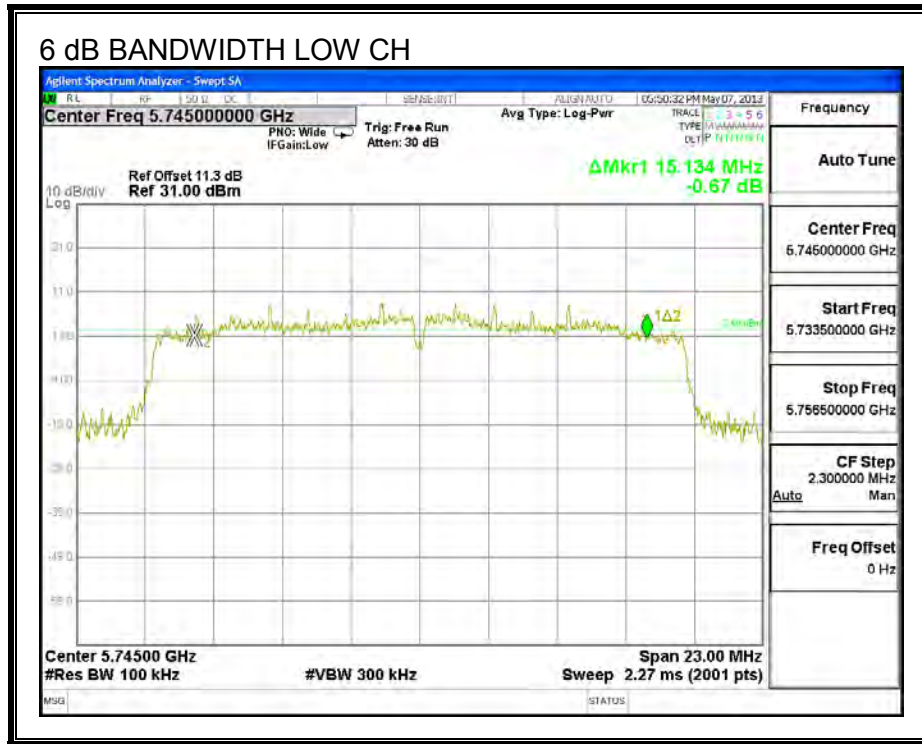

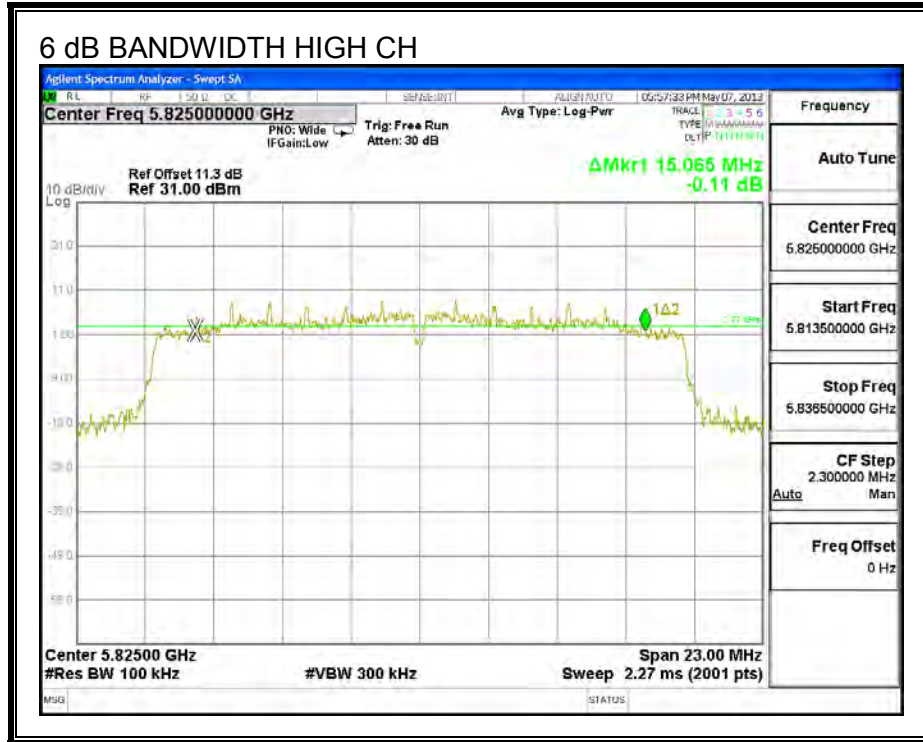

**HT40**

**6 dB BANDWIDTH**

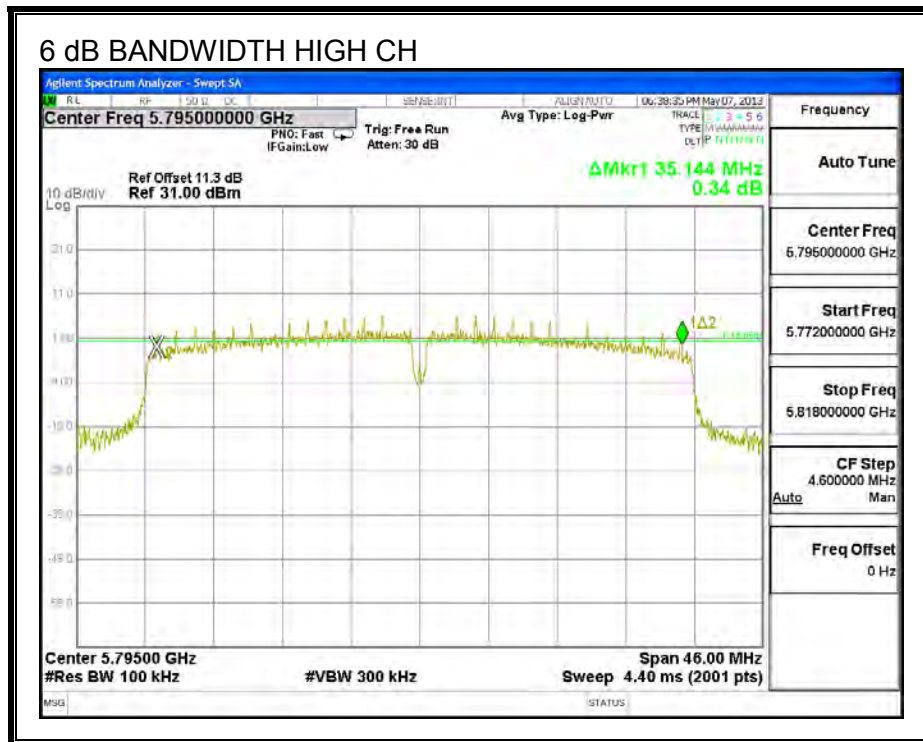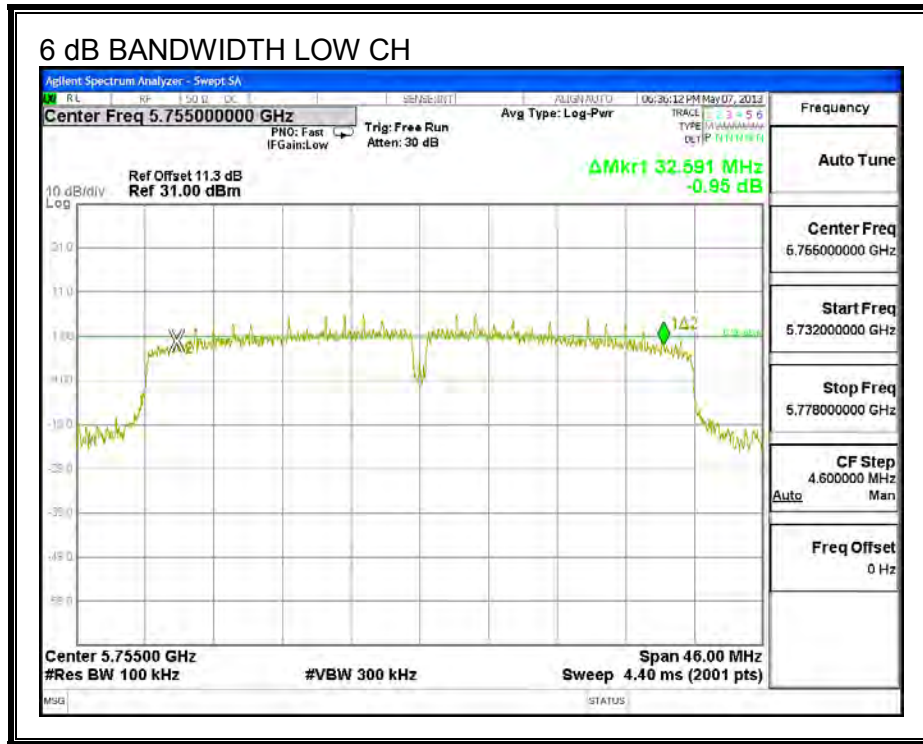

## 7.2.2. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.

### RESULTS

#### a mode

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low     | 5745            | 16.4530             |
| Mid     | 5785            | 16.4300             |
| High    | 5825            | 16.4160             |

#### HT20



| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low     | 5745            | 17.6150             |
| Mid     | 5785            | 17.5220             |
| High    | 5825            | 17.6670             |

#### HT40


| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low     | 5755            | 35.8960             |
| High    | 5795            | 35.2580             |

**a mode**

**99% BANDWIDTH**

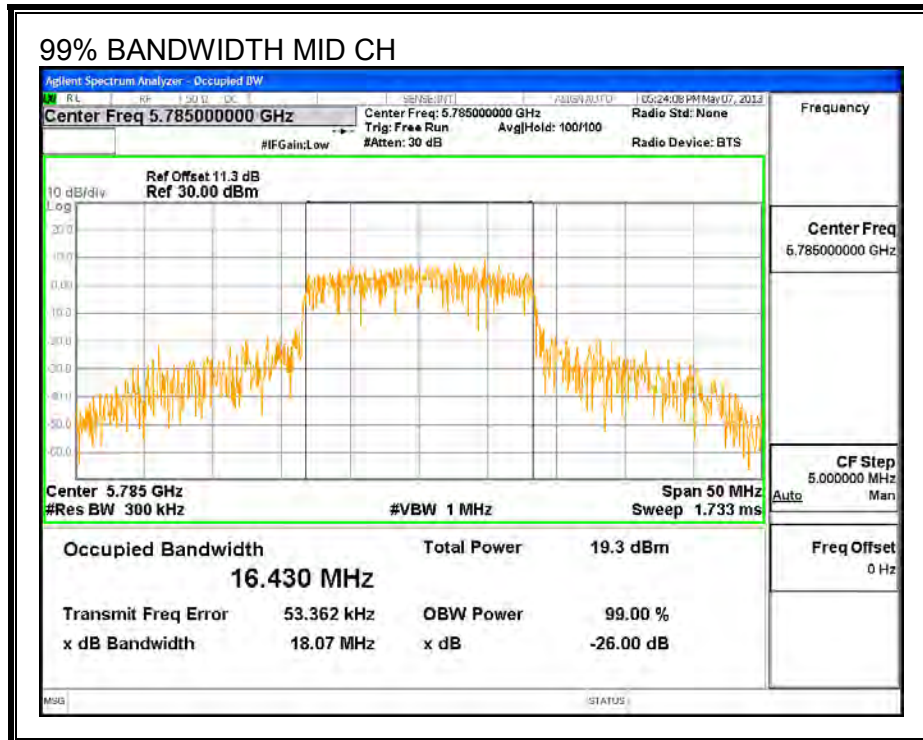
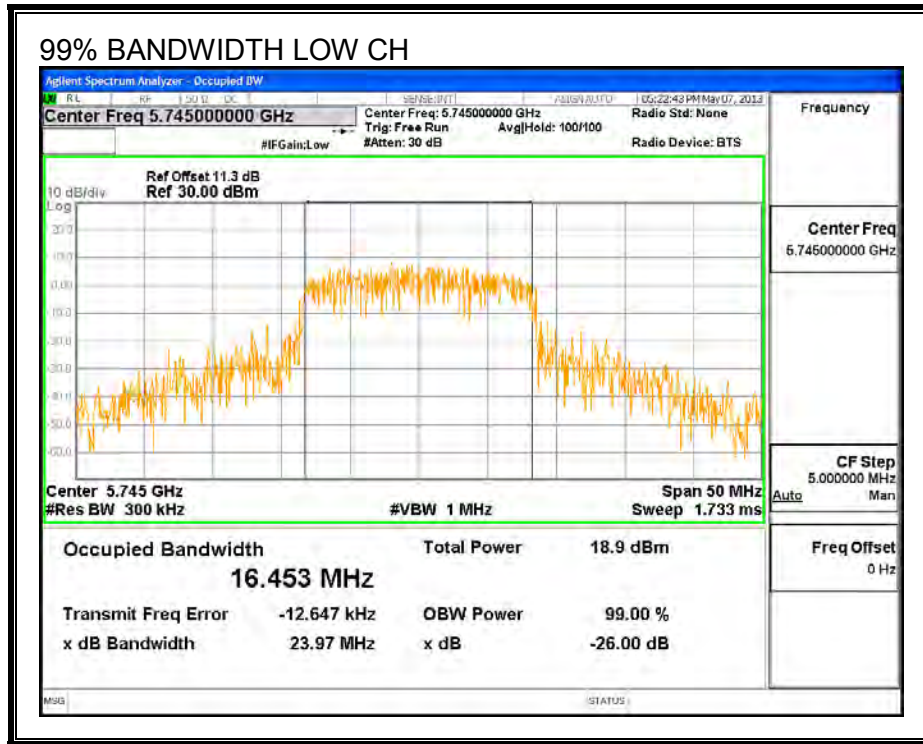





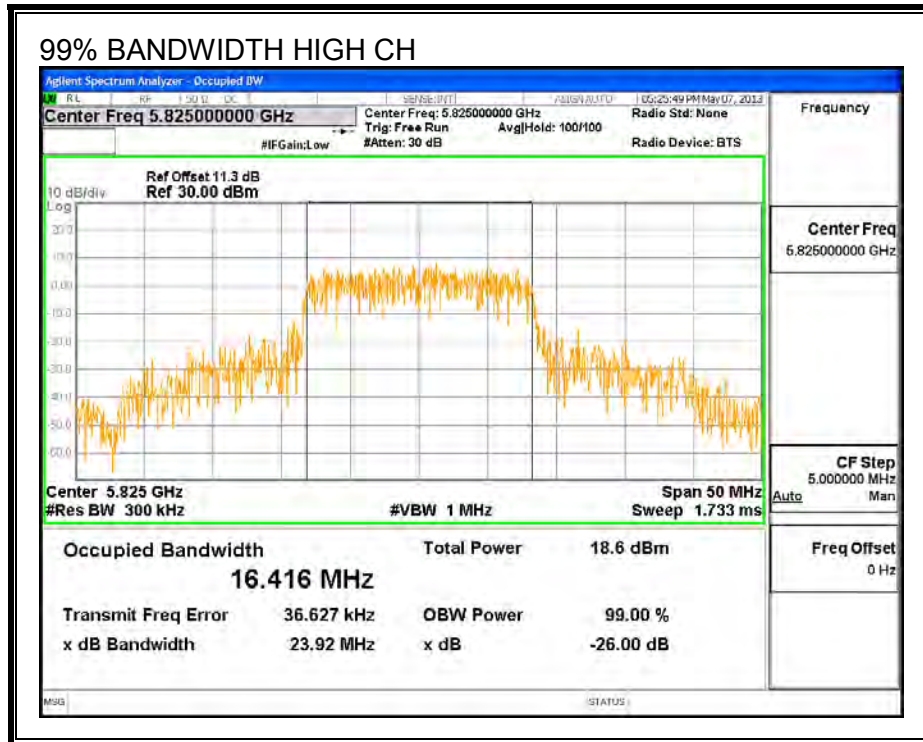

**HT20**



**99% BANDWIDTH**

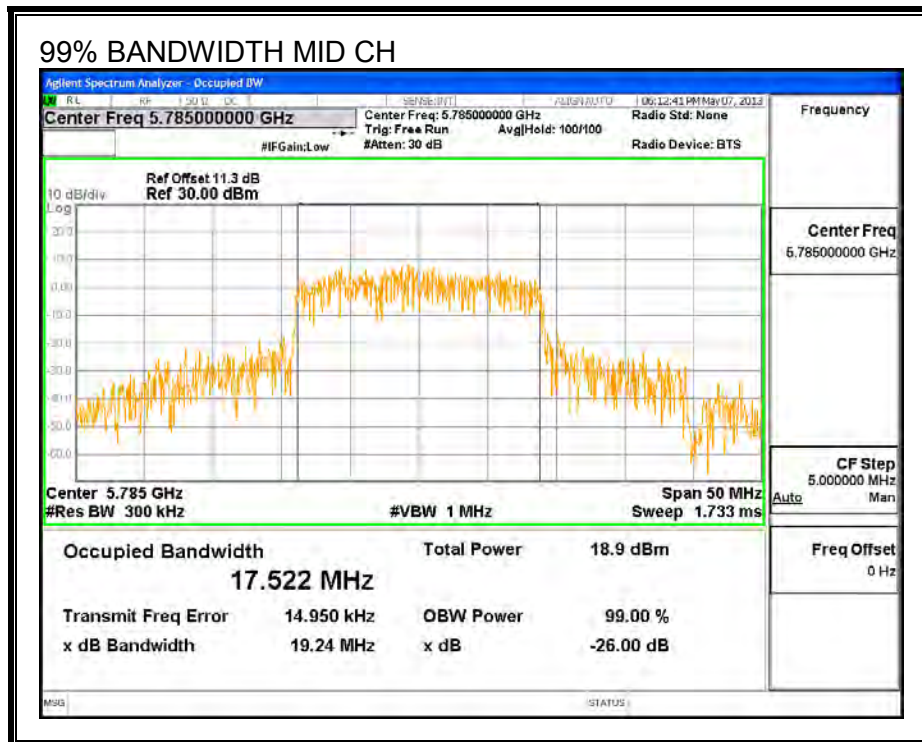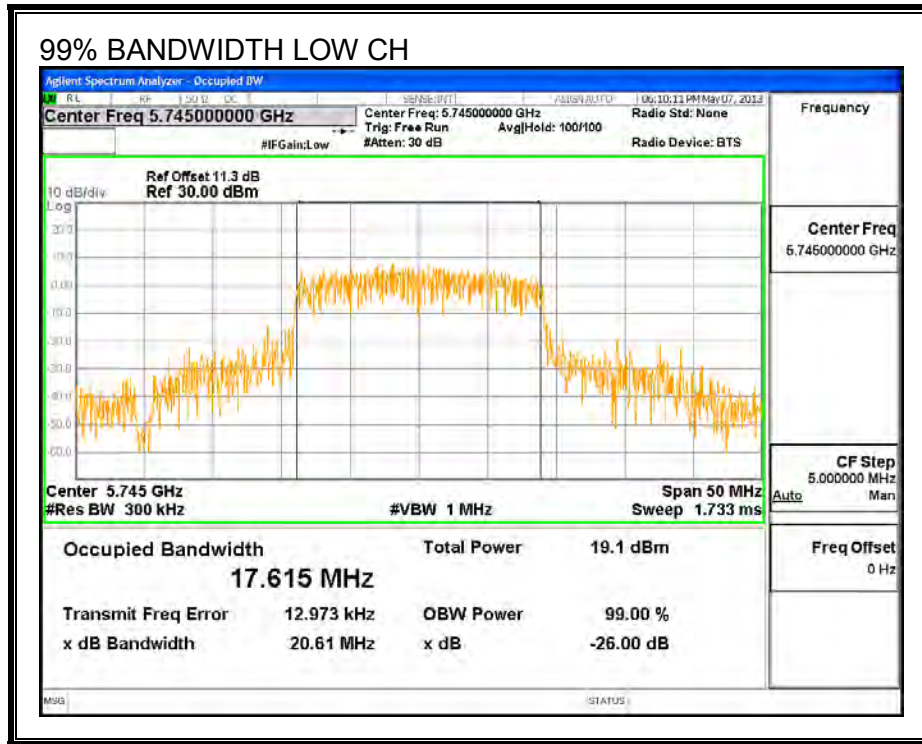

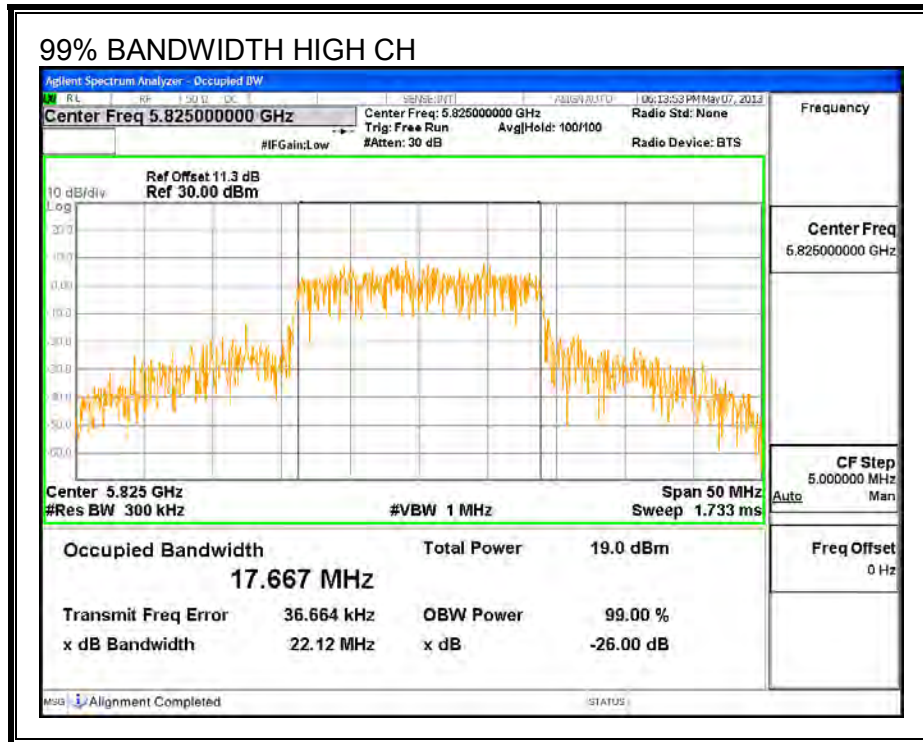

**HT40**

**99% BANDWIDTH**

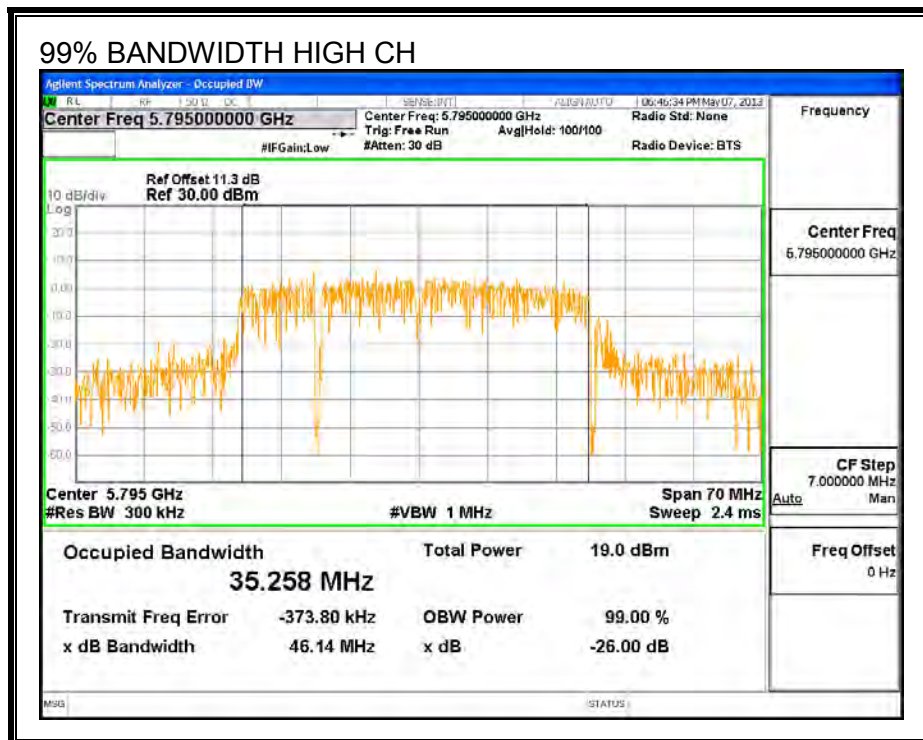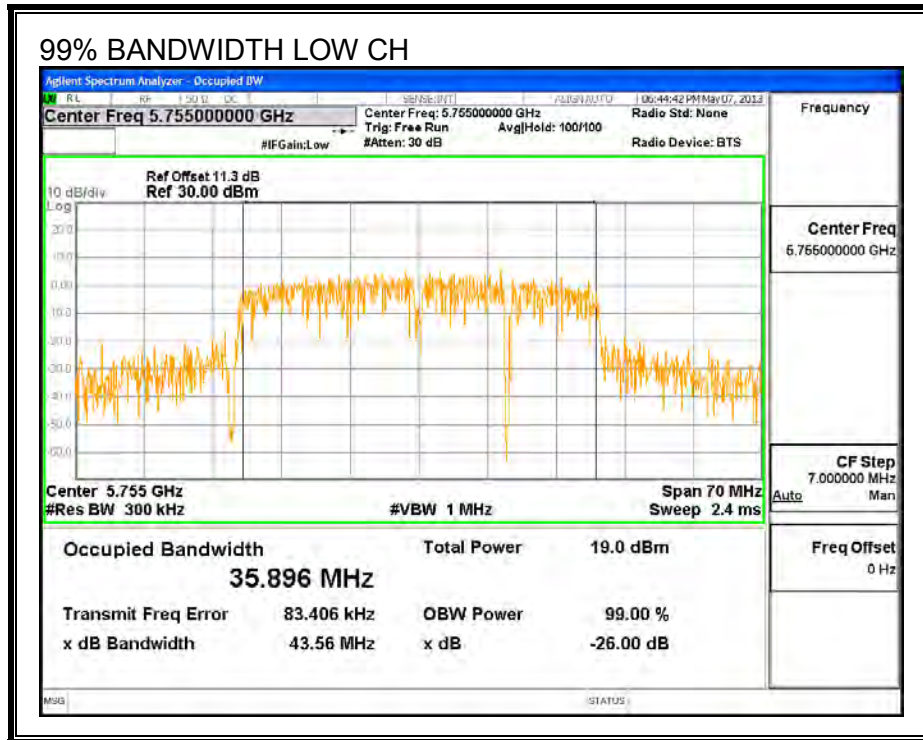

### 7.2.3. AVERAGE POWER

#### LIMITS

Note; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.3 dB (including 10 dB pad and 1.3 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### RESULTS

##### a mode

| Channel | Frequency (MHz) | Power (dBm) |
|---------|-----------------|-------------|
| Low     | 5745            | 16.19       |
| Mid     | 5785            | 16.06       |
| High    | 5825            | 15.91       |

##### HT20

| Channel | Frequency (MHz) | Power (dBm) |
|---------|-----------------|-------------|
| Low     | 5745            | 16.06       |
| Mid     | 5785            | 15.78       |
| High    | 5825            | 15.60       |

##### HT40

| Channel | Frequency (MHz) | Power (dBm) |
|---------|-----------------|-------------|
| Low     | 5755            | 16.09       |
| High    | 5795            | 15.86       |

## **7.2.4. OUTPUT POWER**

### **LIMITS**

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**a mode**

**Limits**

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 5745               | -4.21                        | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid     | 5785               | -4.21                        | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 5825               | -4.21                        | 30.00                          | 30                            | 36                           | 30.00                 |

**Results**

| Channel | Frequency<br>(MHz) | Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|------------------------|-----------------------------------|-------------------------|----------------|
| Low     | 5745               | 24.141                 | 24.14                             | 30.00                   | -5.86          |
| Mid     | 5785               | 23.373                 | 23.37                             | 30.00                   | -6.63          |
| High    | 5825               | 23.280                 | 23.28                             | 30.00                   | -6.72          |

**HT20**

**Limits**

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 5745               | -4.21                        | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid     | 5785               | -4.21                        | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 5825               | -4.21                        | 30.00                          | 30                            | 36                           | 30.00                 |

**Results**

| Channel | Frequency<br>(MHz) | Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|------------------------|-----------------------------------|-------------------------|----------------|
| Low     | 5745               | 23.590                 | 23.59                             | 30.00                   | -6.41          |
| Mid     | 5785               | 23.206                 | 23.21                             | 30.00                   | -6.79          |
| High    | 5825               | 22.978                 | 22.98                             | 30.00                   | -7.02          |

**HT40**

**Limits**

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low     | 5755               | -4.21                        | 30.00                          | 30                            | 36                           | 30.00                 |
| High    | 5795               | -4.21                        | 30.00                          | 30                            | 36                           | 30.00                 |



**Results**


| Channel | Frequency<br>(MHz) | Meas<br>Power<br>(dBm) | Total<br>Corr'd<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|------------------------|-----------------------------------|-------------------------|----------------|
| Low     | 5755               | 24.005                 | 24.01                             | 30.00                   | -6.00          |
| High    | 5795               | 23.632                 | 23.63                             | 30.00                   | -6.37          |



**a mode**



**OUTPUT POWER**

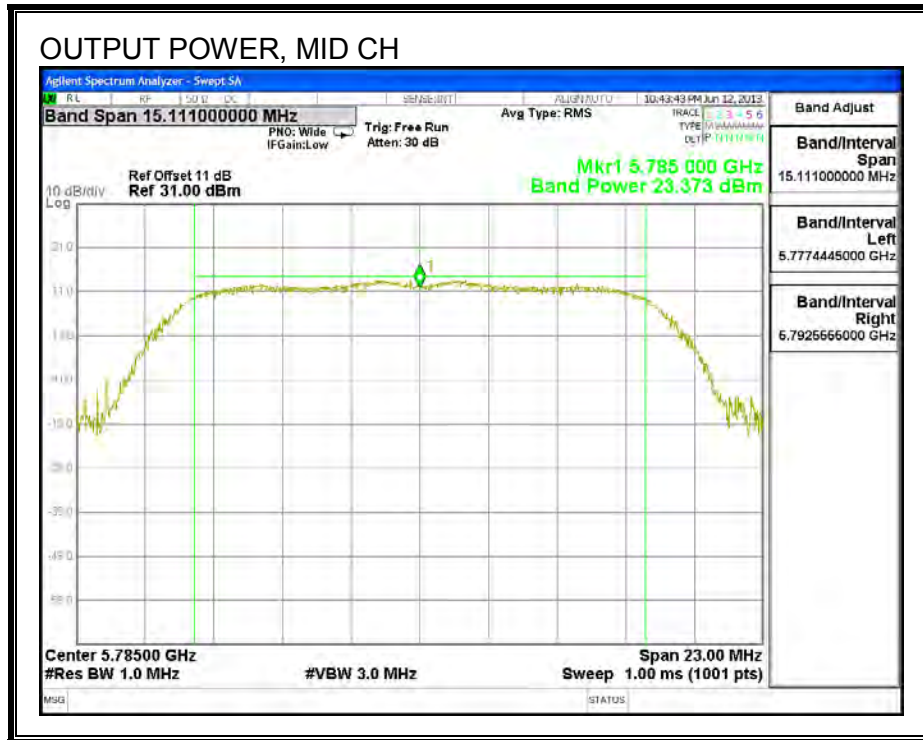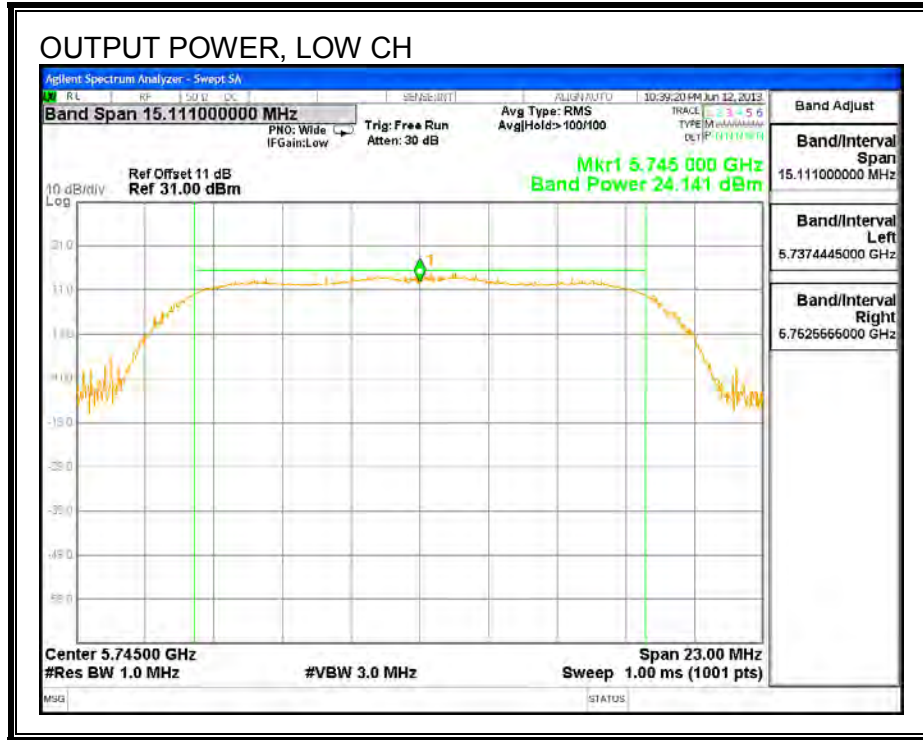


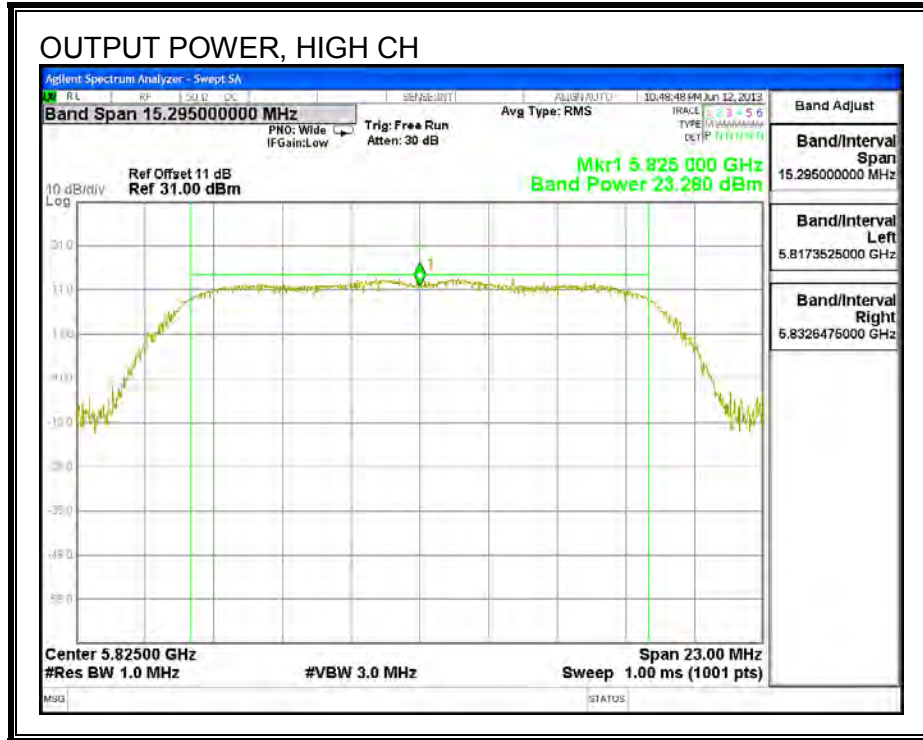

**HT20**



**OUTPUT POWER**

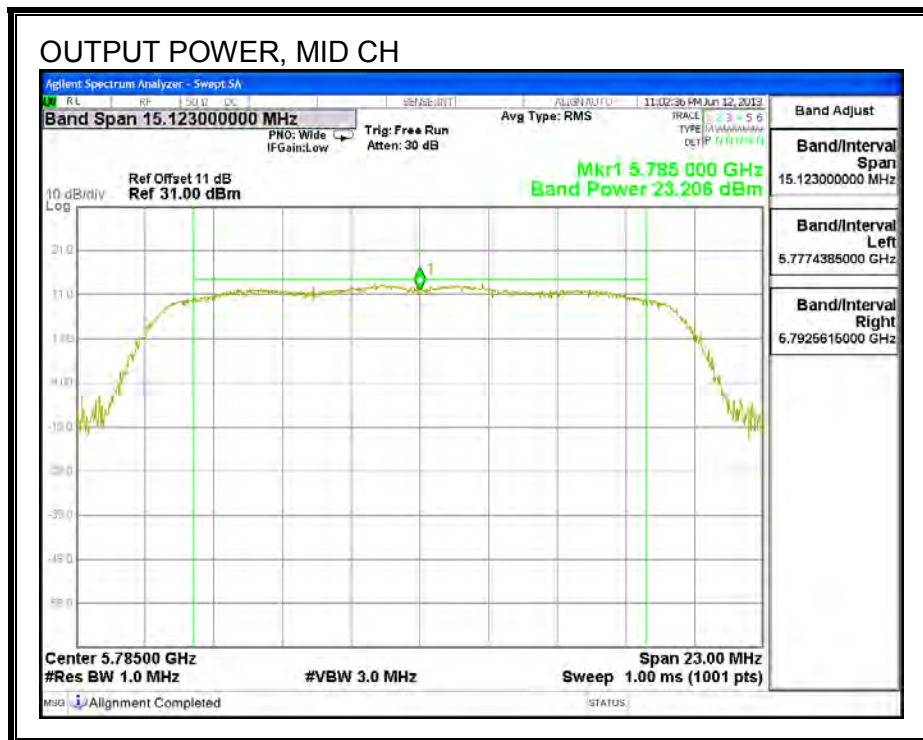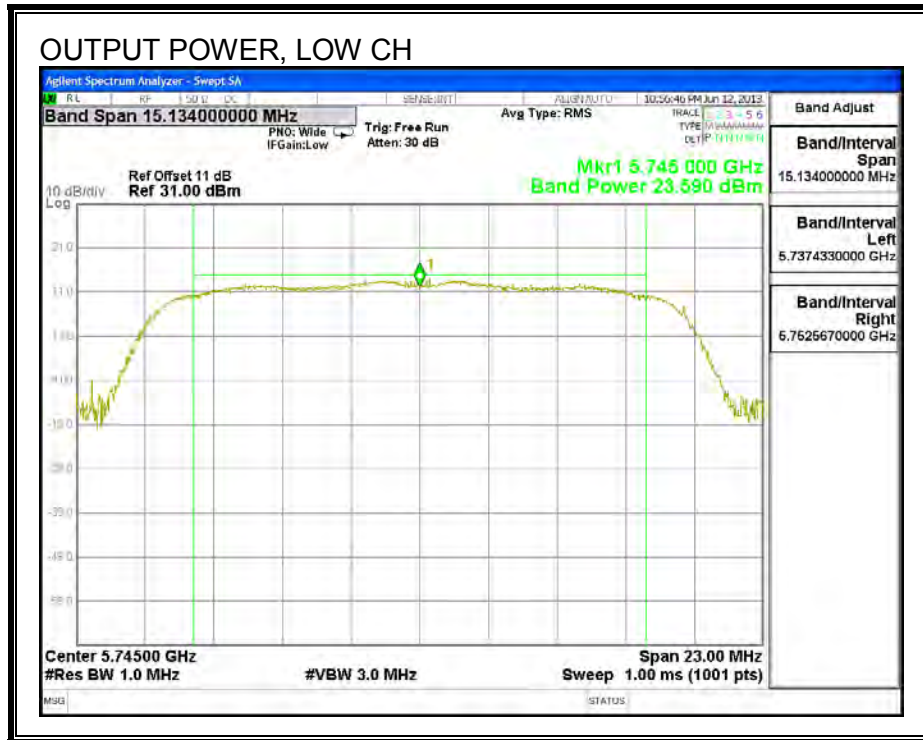

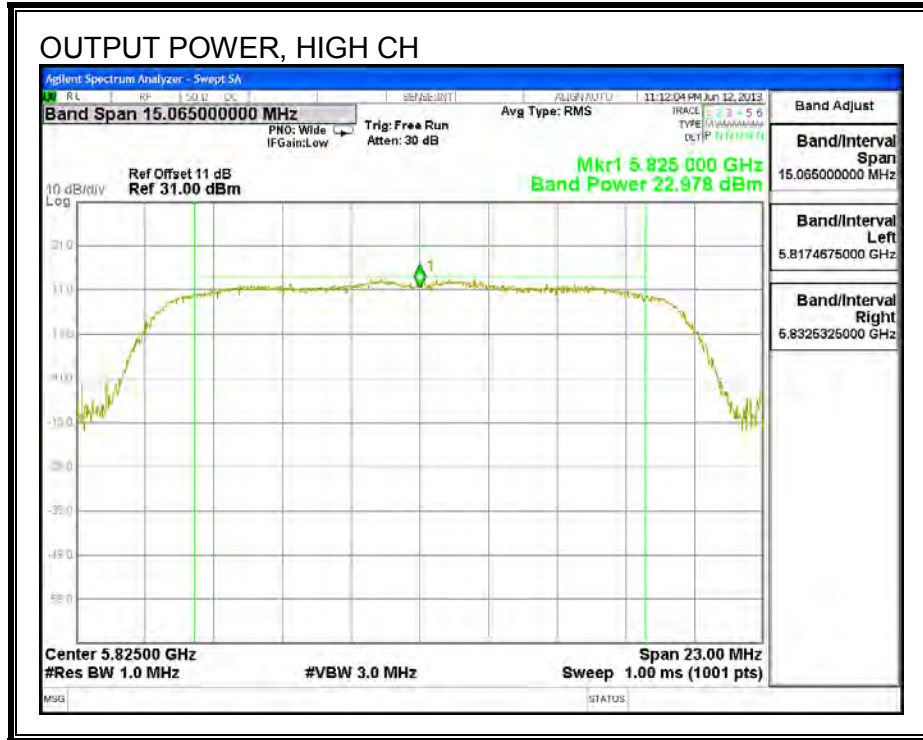

**HT40**

**OUTPUT POWER**

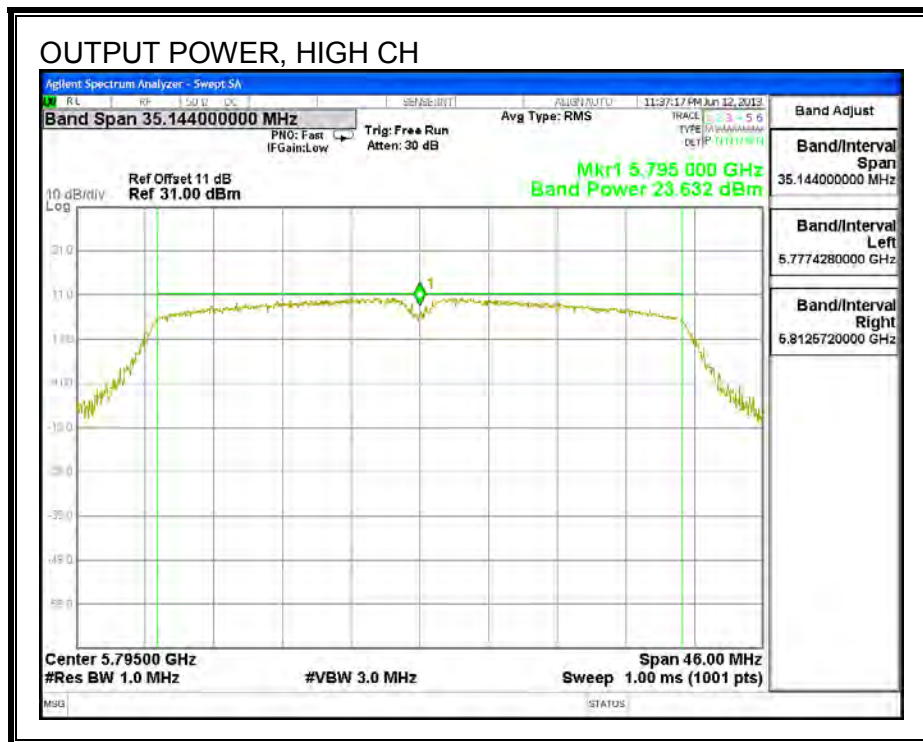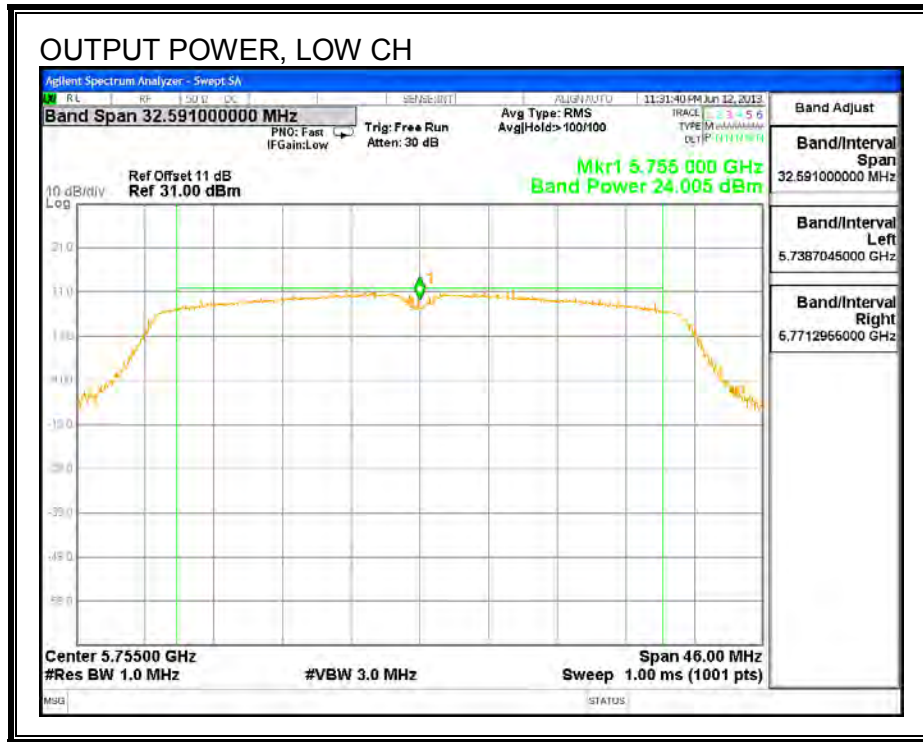

**7.2.5. PSD**

**LIMITS**

FCC §15.247

IC RSS-210 A8.2

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

**RESULTS**

**a mode**

**PSD Results**

| Channel | Frequency<br>(MHz) | Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|---------------|----------------|----------------|
| Low     | 5745               | -5.60         | 8.00           | -13.60         |
| Mid     | 5785               | -6.16         | 8.00           | -14.16         |
| High    | 5825               | -5.32         | 8.00           | -13.32         |

**HT20**

**PSD Results**

| Channel | Frequency<br>(MHz) | Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|---------------|----------------|----------------|
| Low     | 5745               | -5.50         | 8.00           | -13.50         |
| Mid     | 5785               | -5.67         | 8.00           | -13.67         |
| High    | 5825               | -5.38         | 8.00           | -13.38         |



**HT40**


**PSD Results**

| Channel | Frequency<br>(MHz) | Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|---------------|----------------|----------------|
| Low     | 5755               | -9.50         | 8.00           | -17.50         |
| High    | 5795               | -8.61         | 8.00           | -16.61         |

a mode

PSD

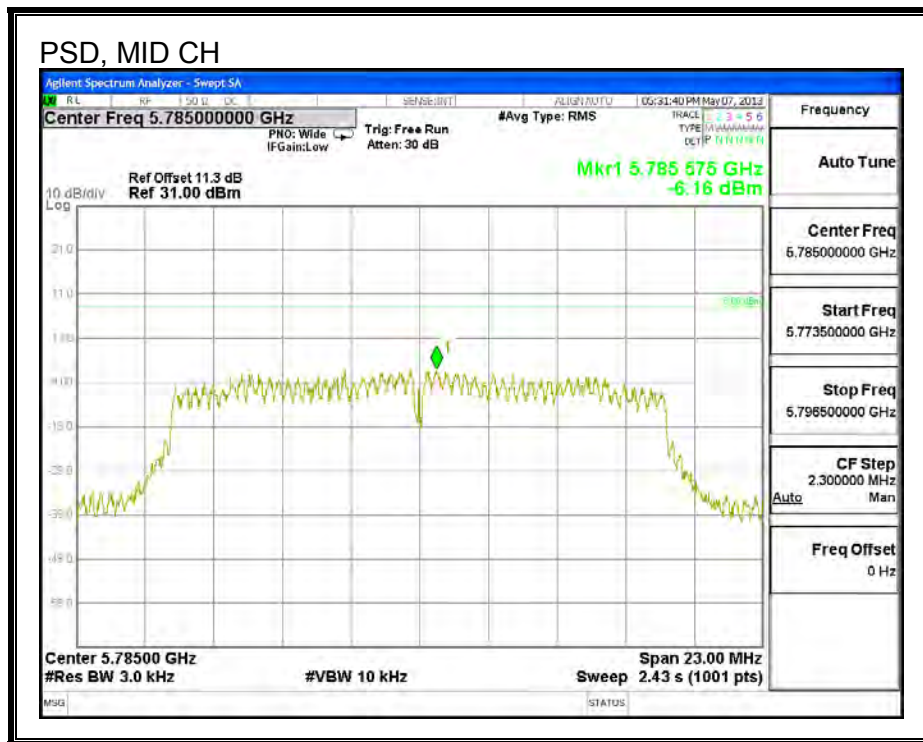
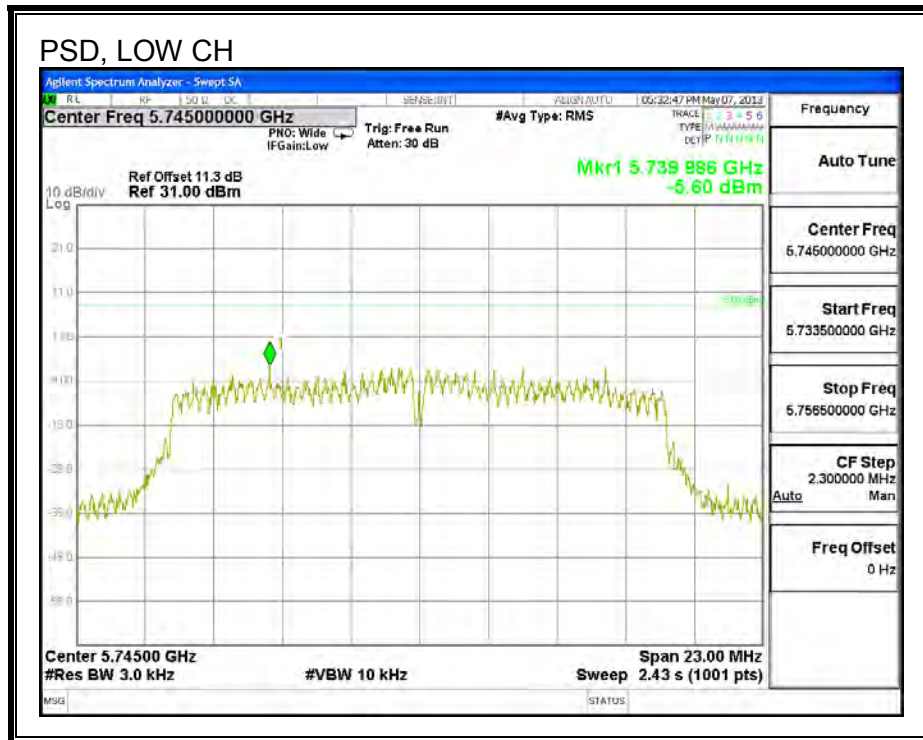


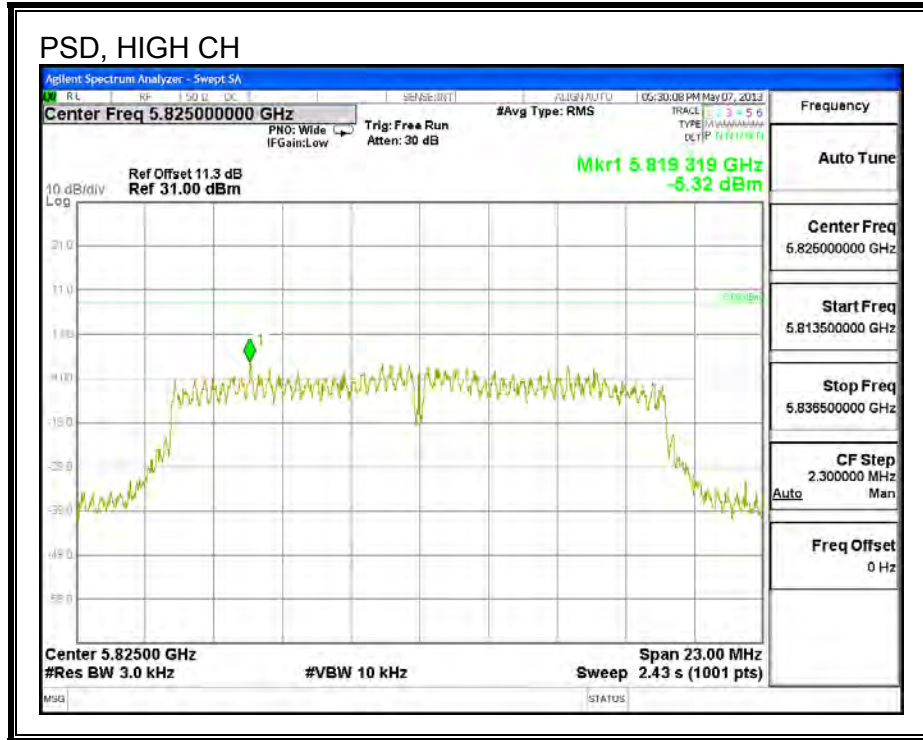




**HT20**



**PSD**

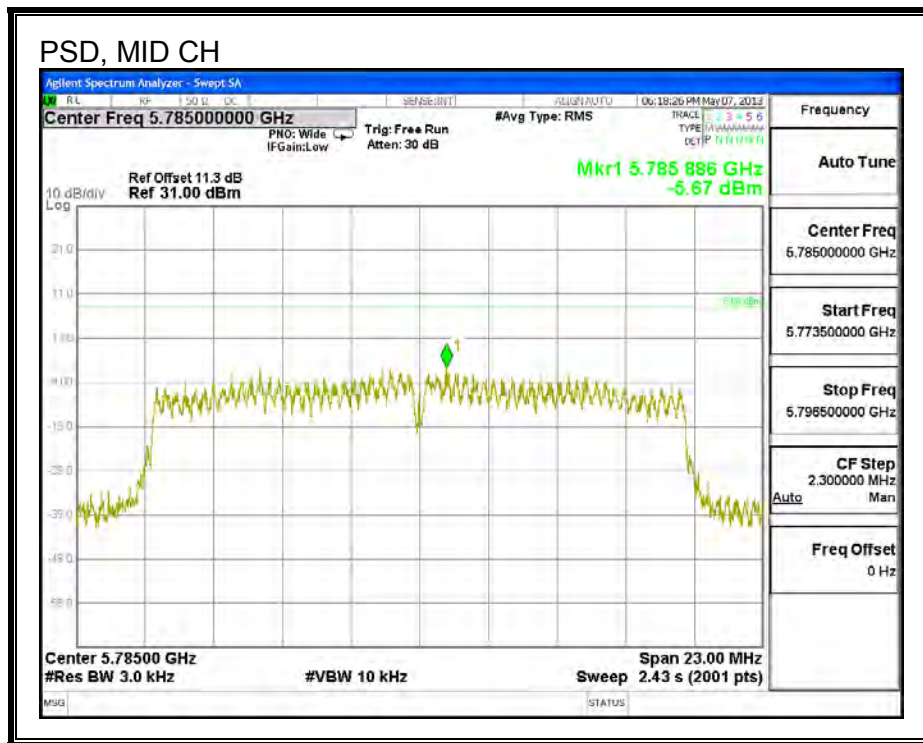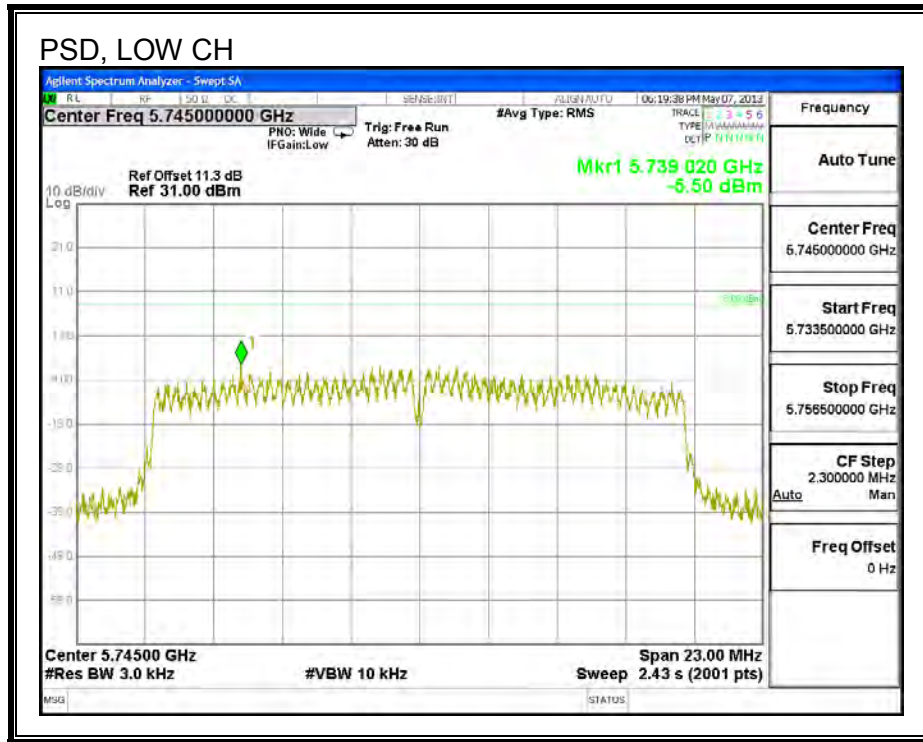

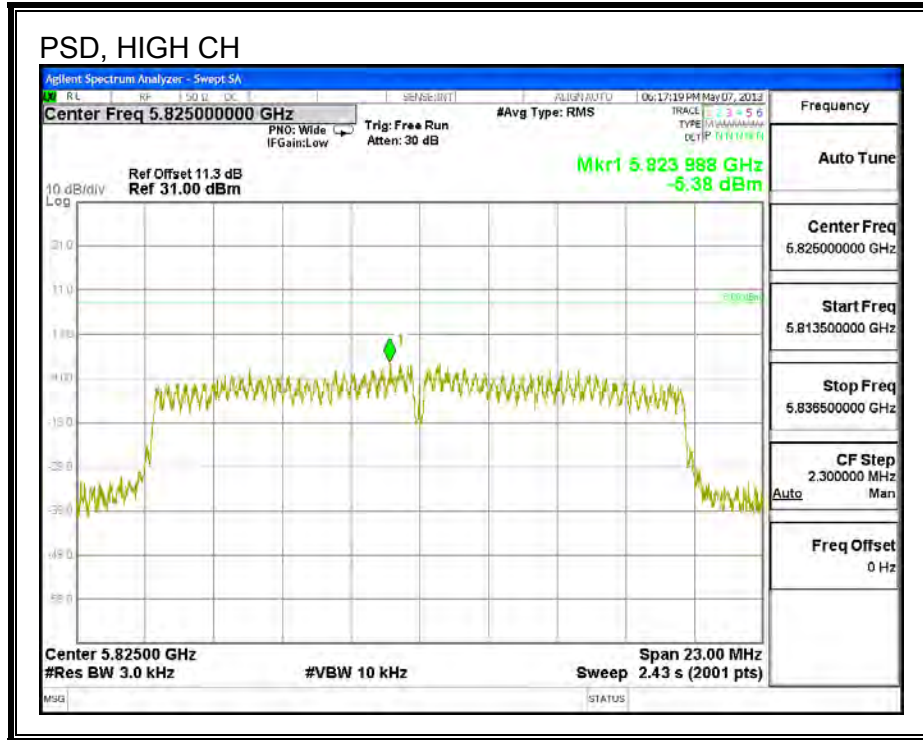

**HT40**

**PSD**

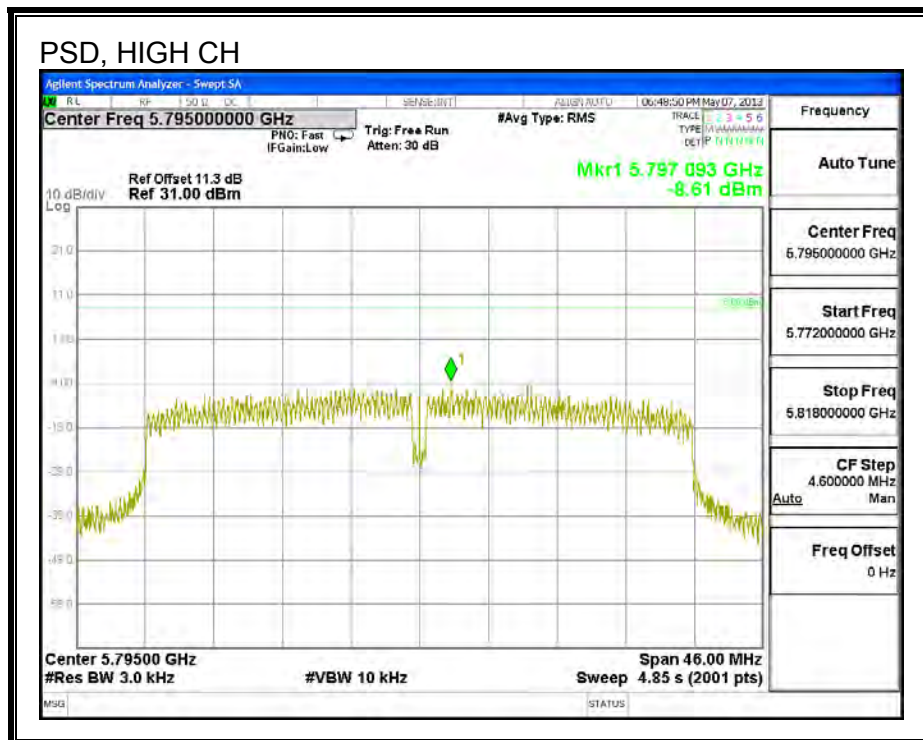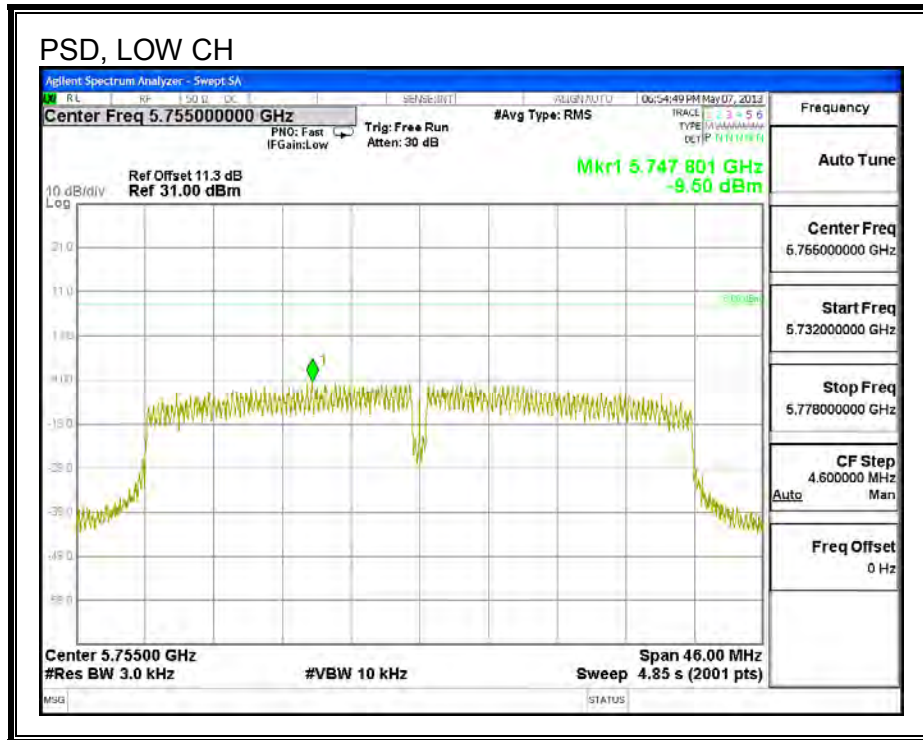

## 7.2.6. OUT-OF-BAND EMISSIONS

### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.


**a mode**

**RESULTS**


**IN-BAND REFERENCE LEVEL**

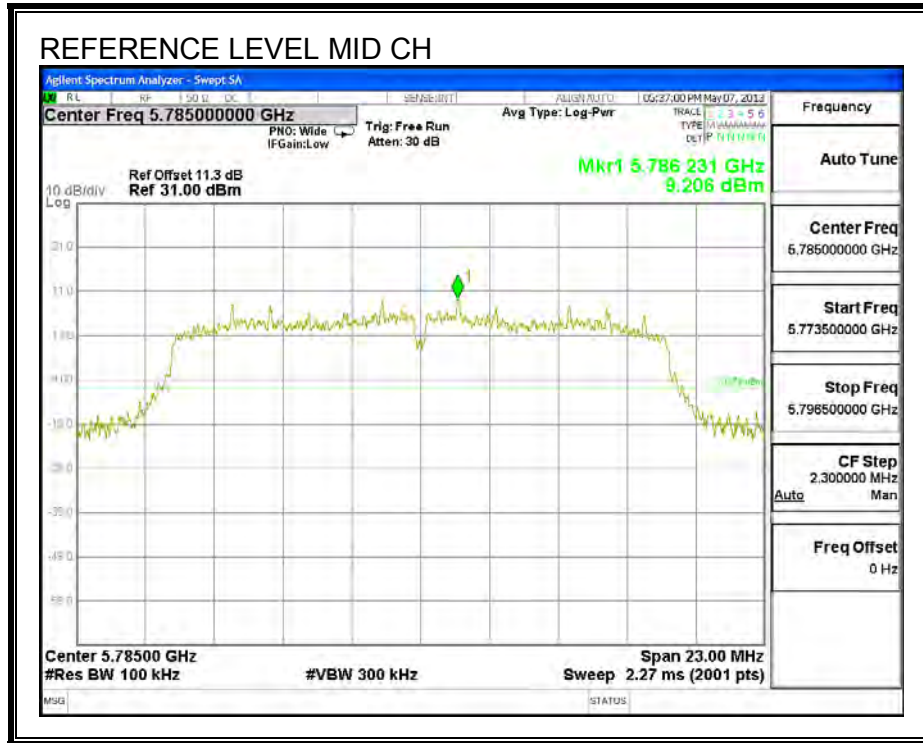



**LOW CHANNEL BANDEDGE**

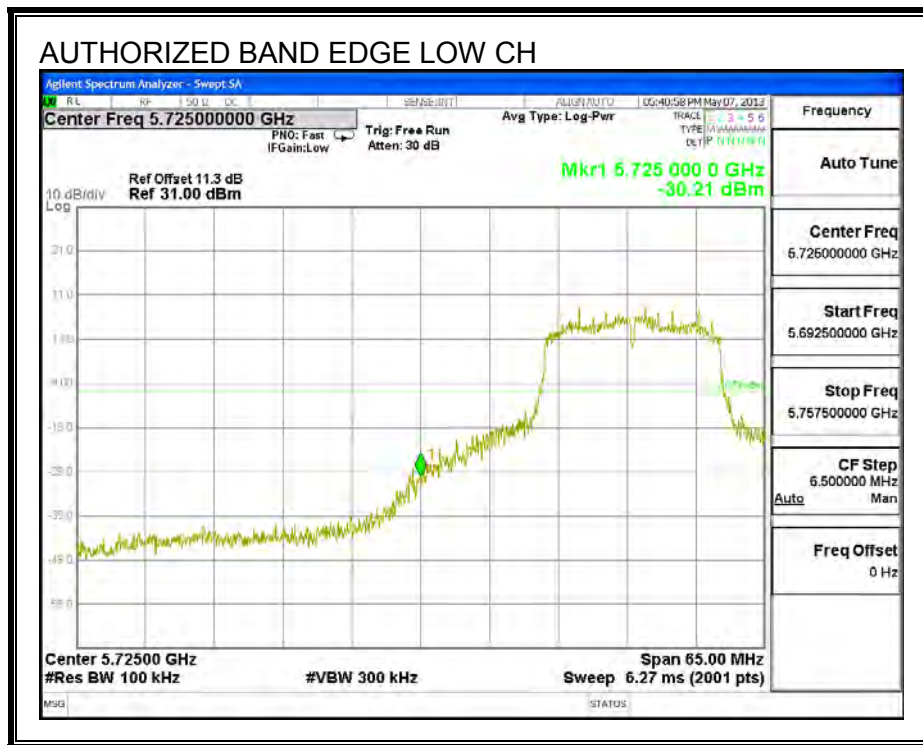


**HIGH CHANNEL BANDEDGE**

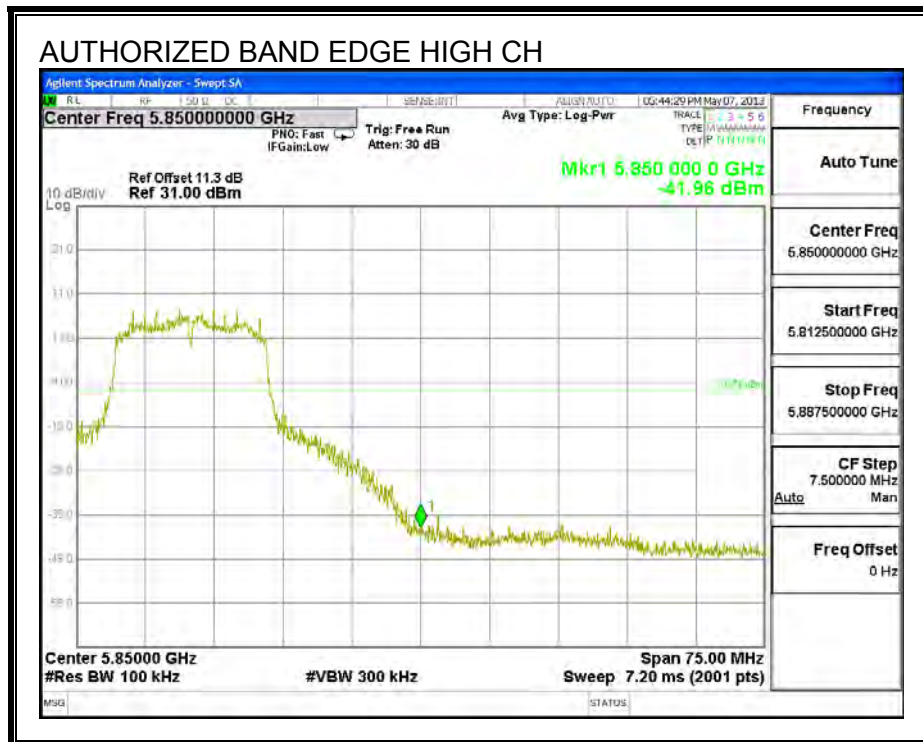

**OUT-OF-BAND EMISSIONS**

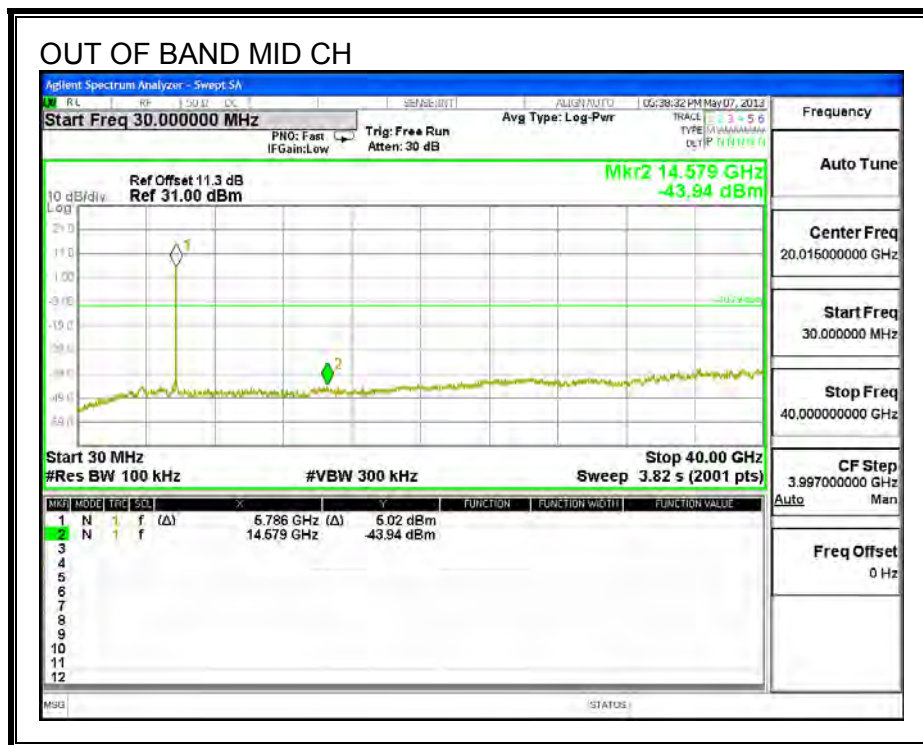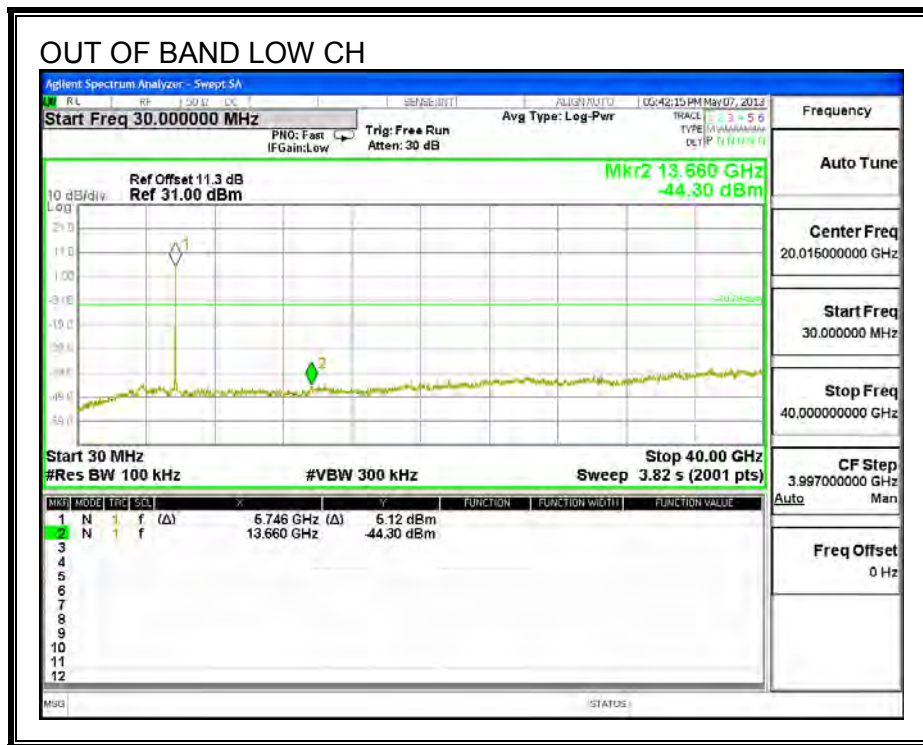

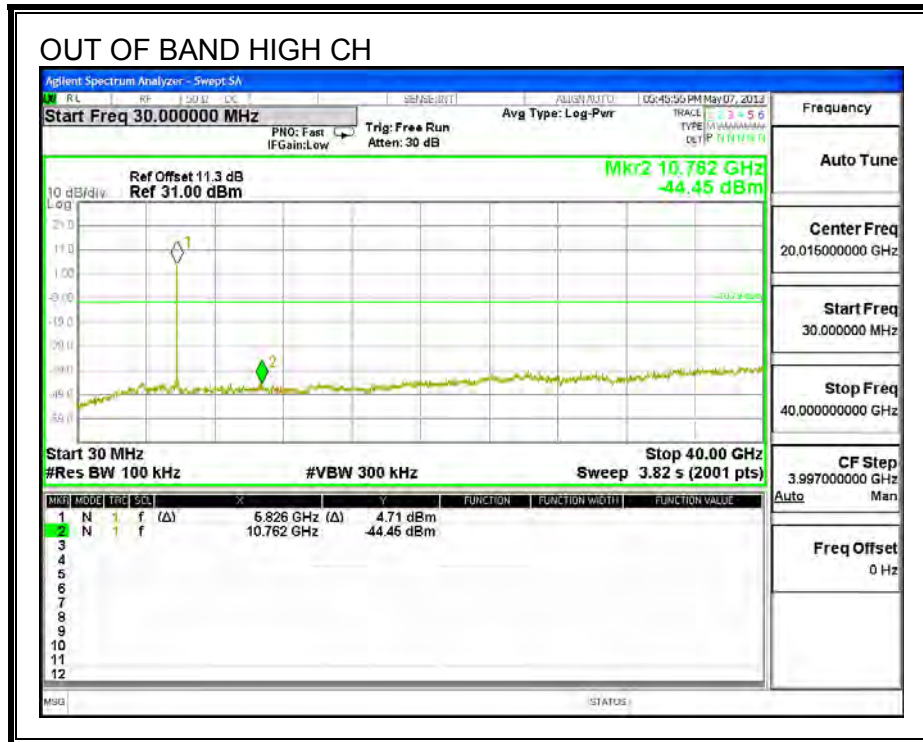





**HT20**

**RESULTS**


**IN-BAND REFERENCE LEVEL**

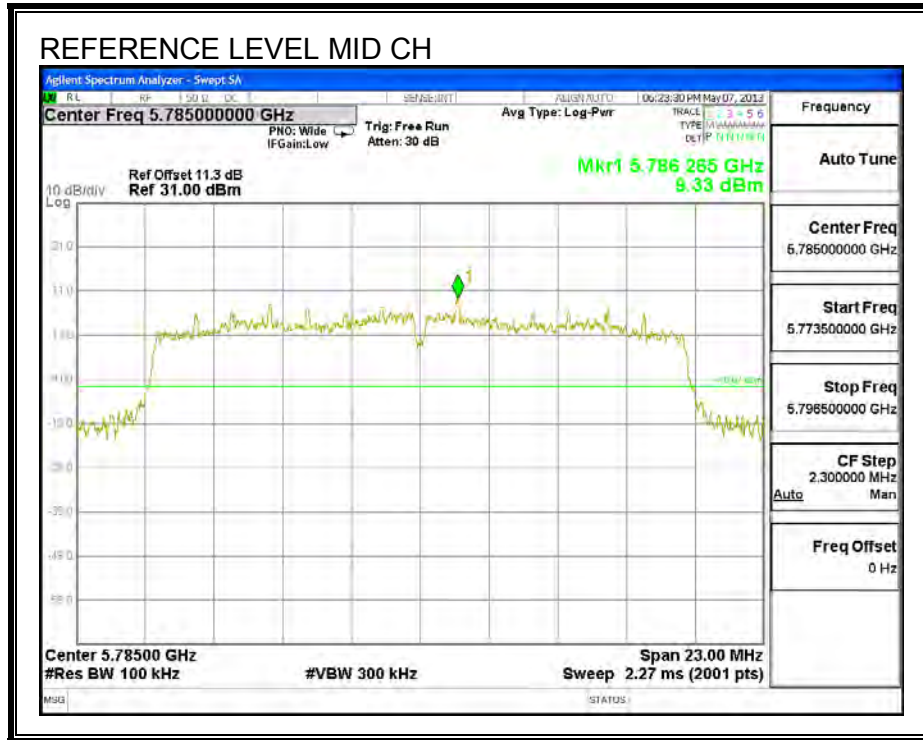



**LOW CHANNEL BANDEDGE**

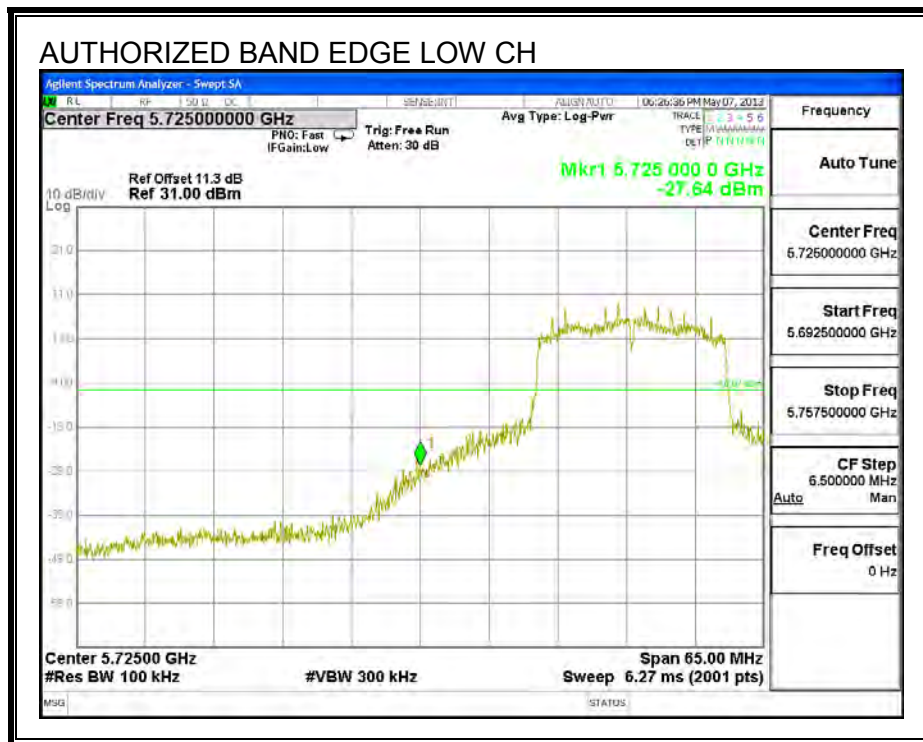


**HIGH CHANNEL BANDEDGE**

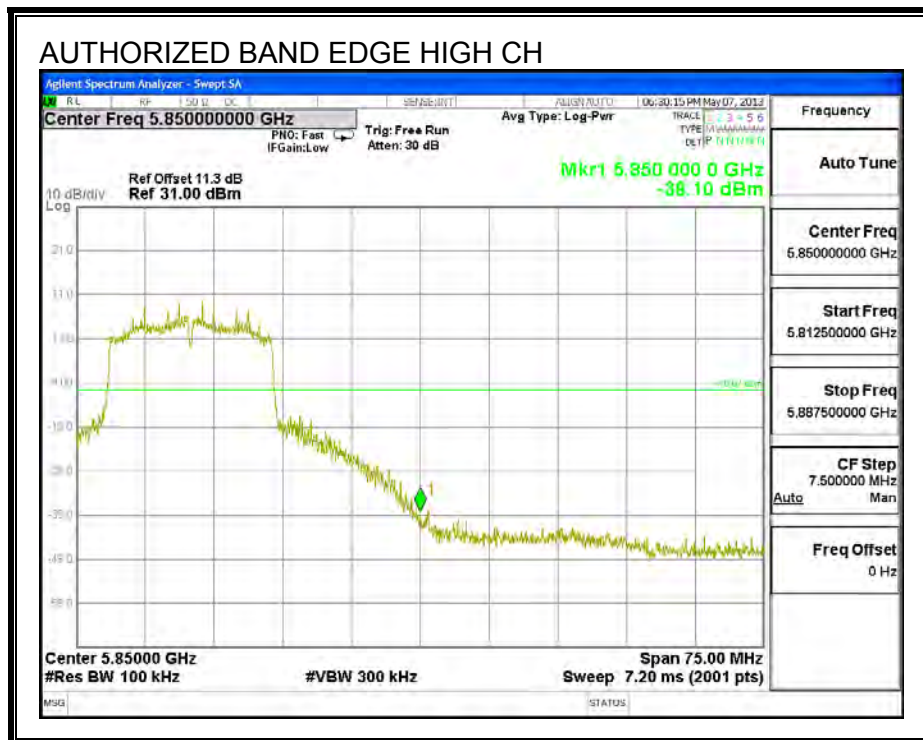

**OUT-OF-BAND EMISSIONS**

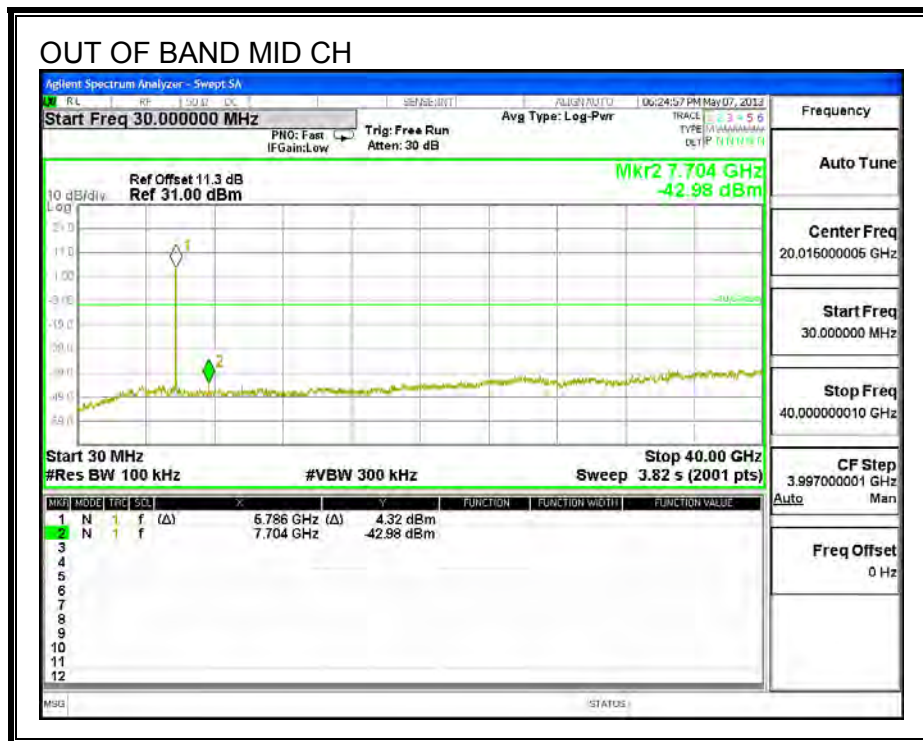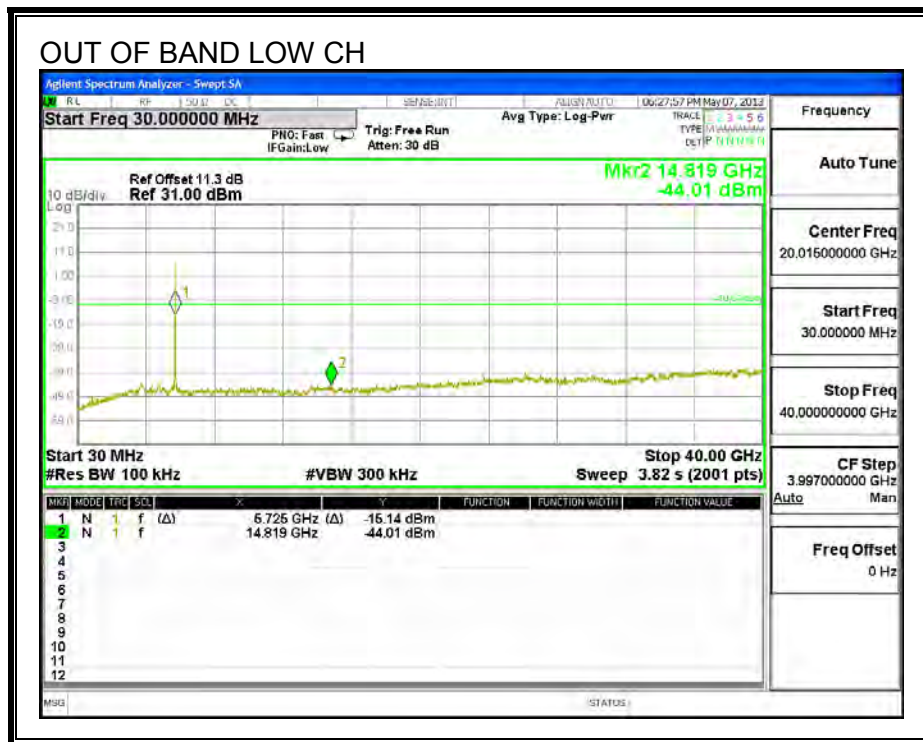


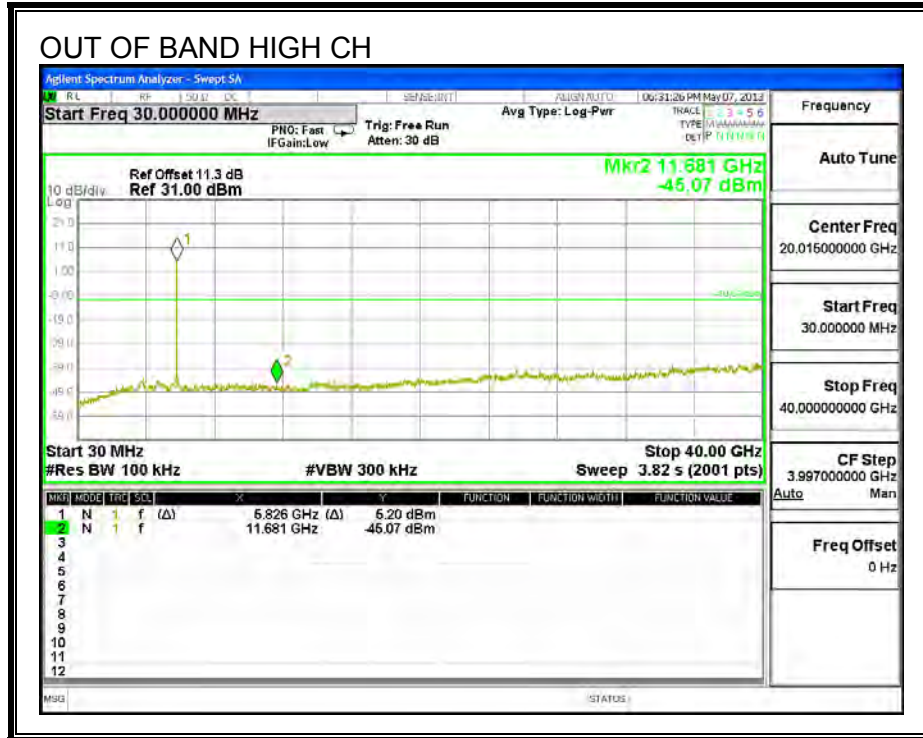


**HT40**

**RESULTS**


**LOW CHANNEL BANDEDGE**

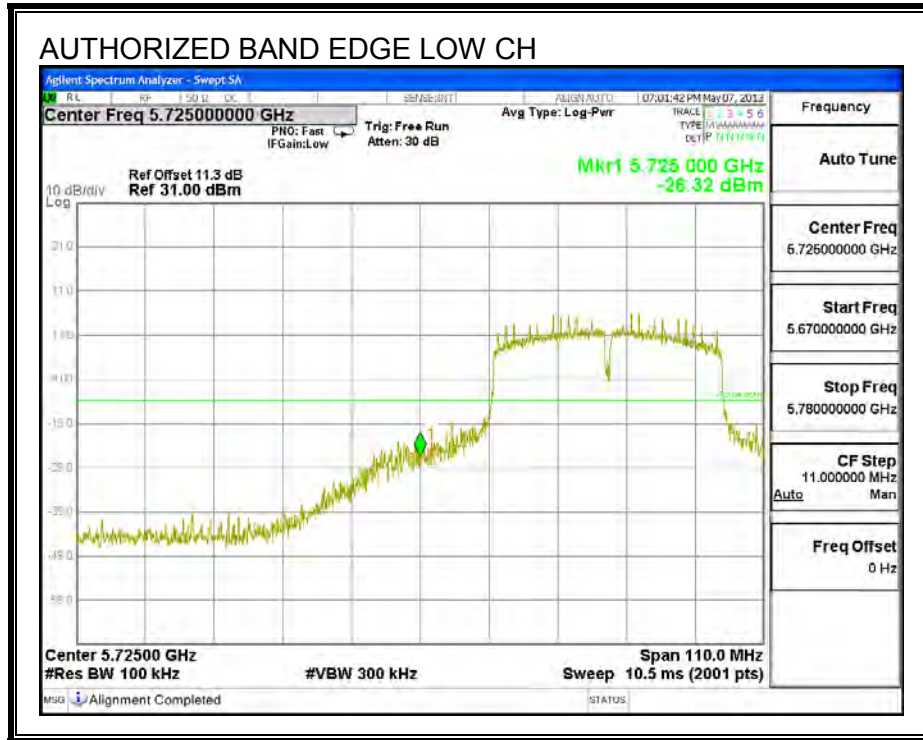


**HIGH CHANNEL BANDEDGE**

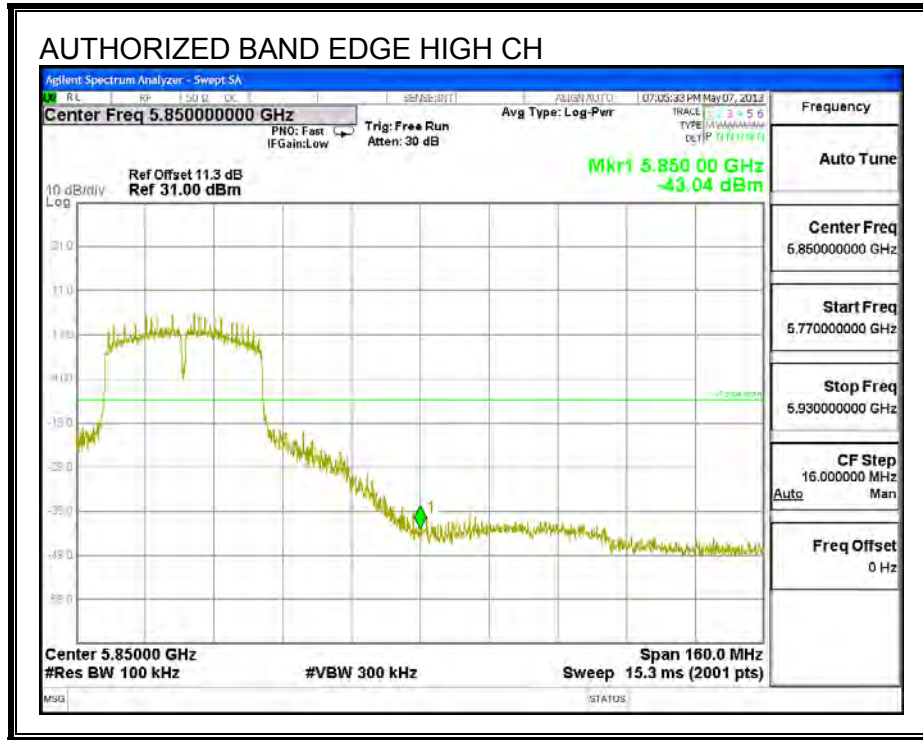

**OUT-OF-BAND EMISSIONS**

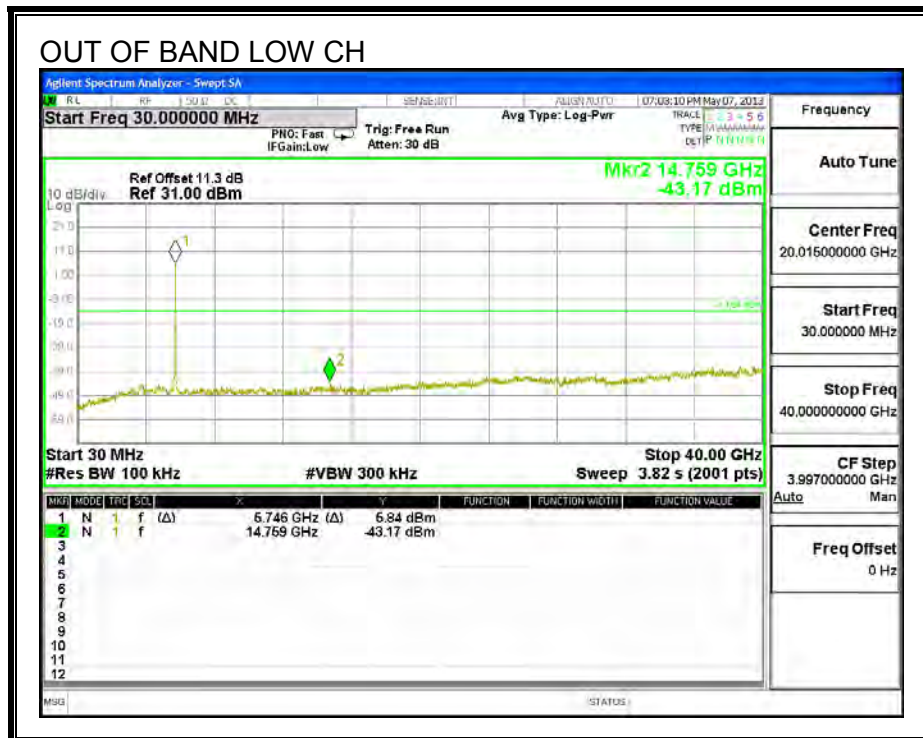

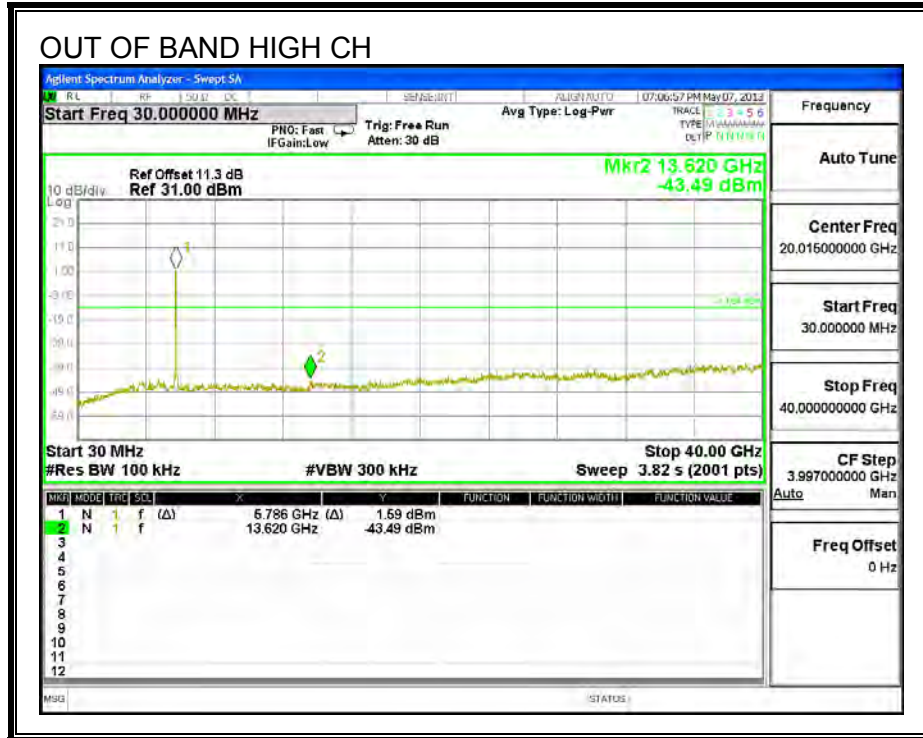

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 30 - 88               | 100                                | 40                                   |
| 88 - 216              | 150                                | 43.5                                 |
| 216 - 960             | 200                                | 46                                   |
| Above 960             | 500                                | 54                                   |

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 1 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.





### 8.2. TRANSMITTER ABOVE 1 GHz



### 8.3. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND



#### RESTRICTED BANDEDGE (LOW CHANNEL)

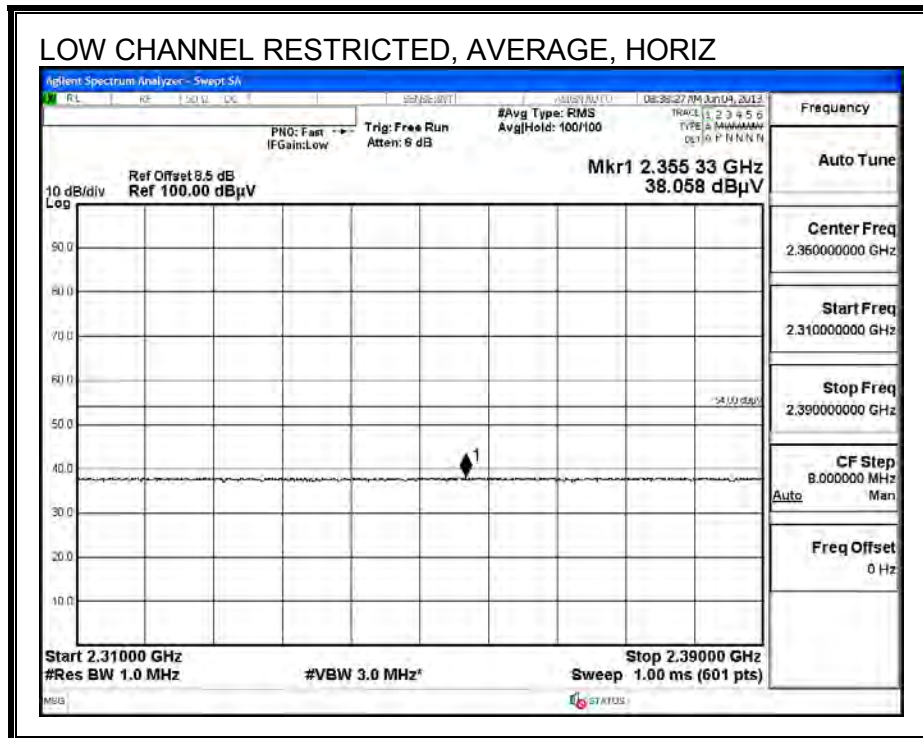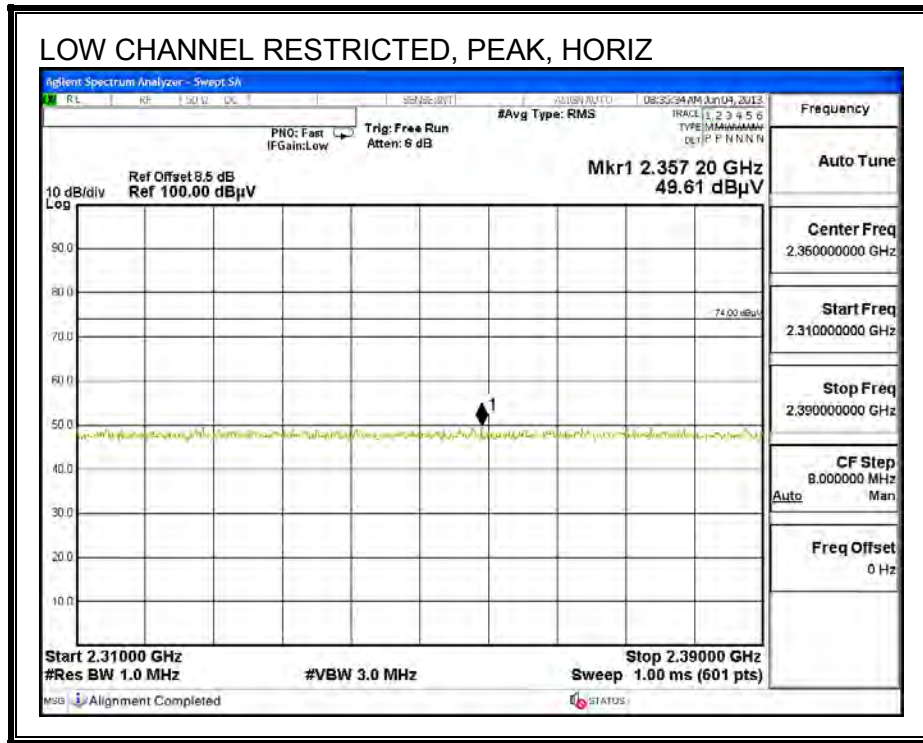

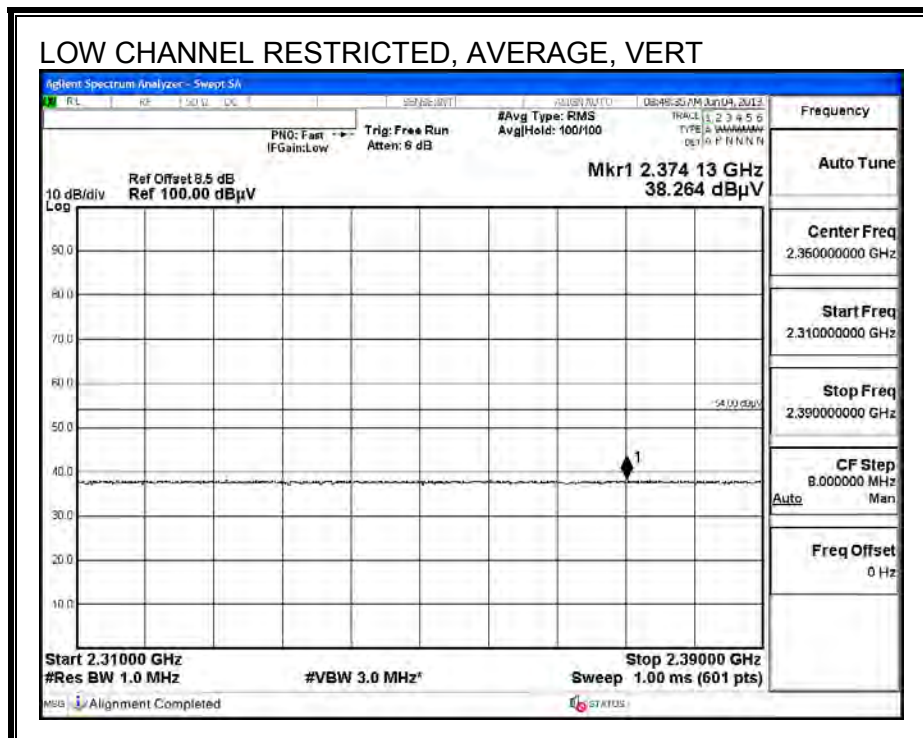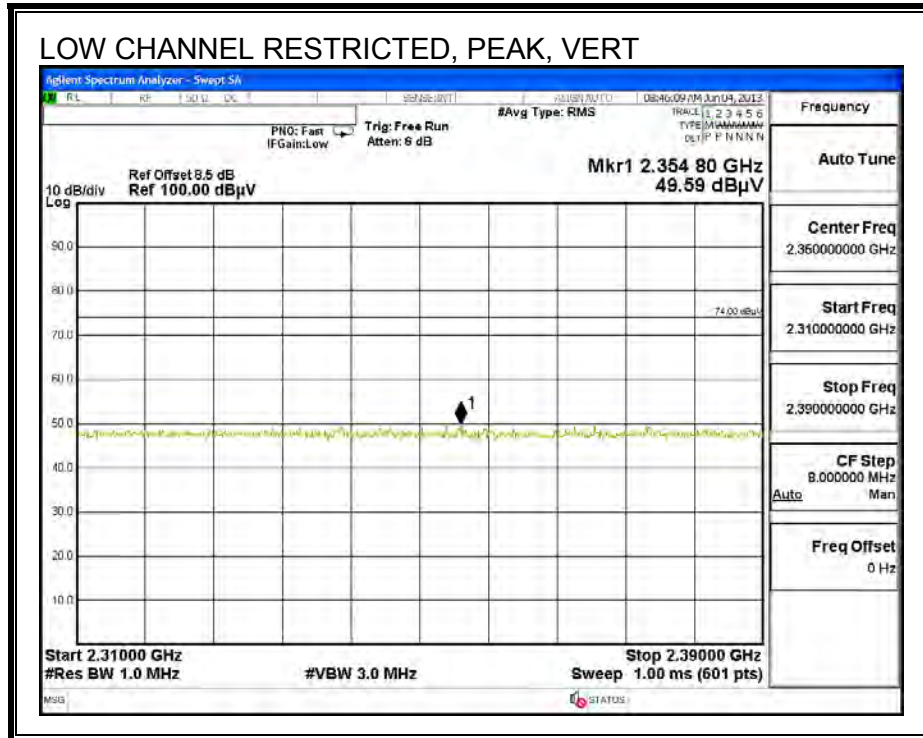



**AUTHORIZED BANDEDGE (HIGH CHANNEL)**

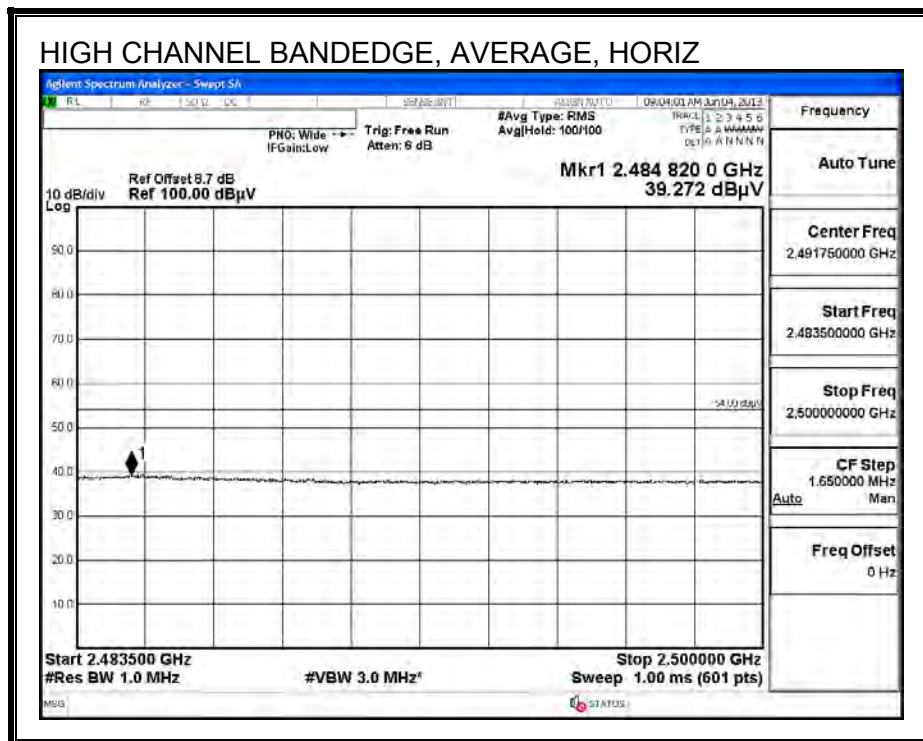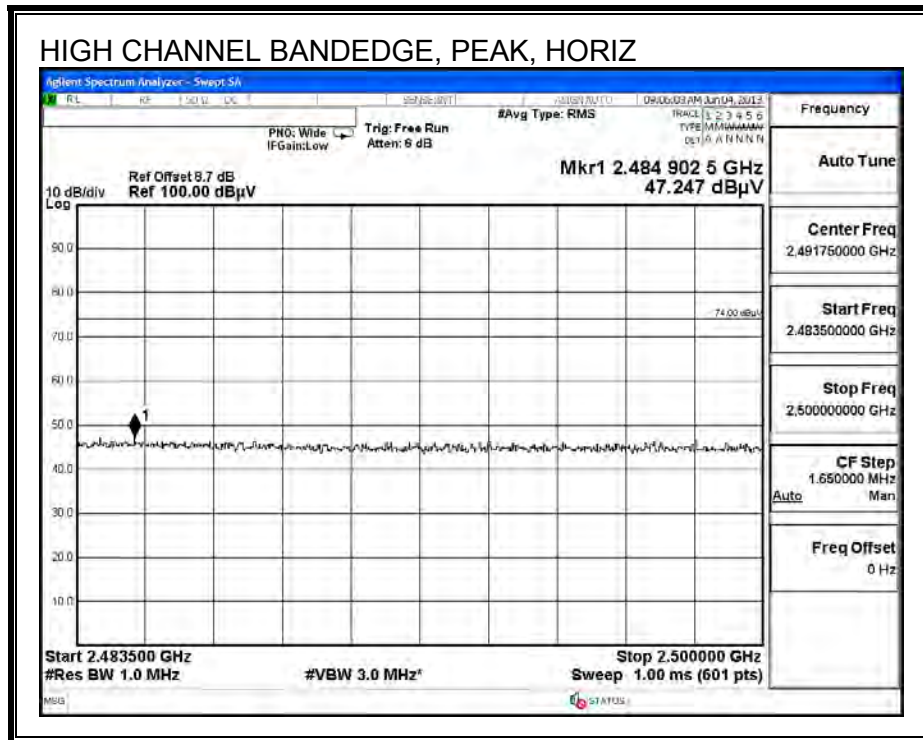


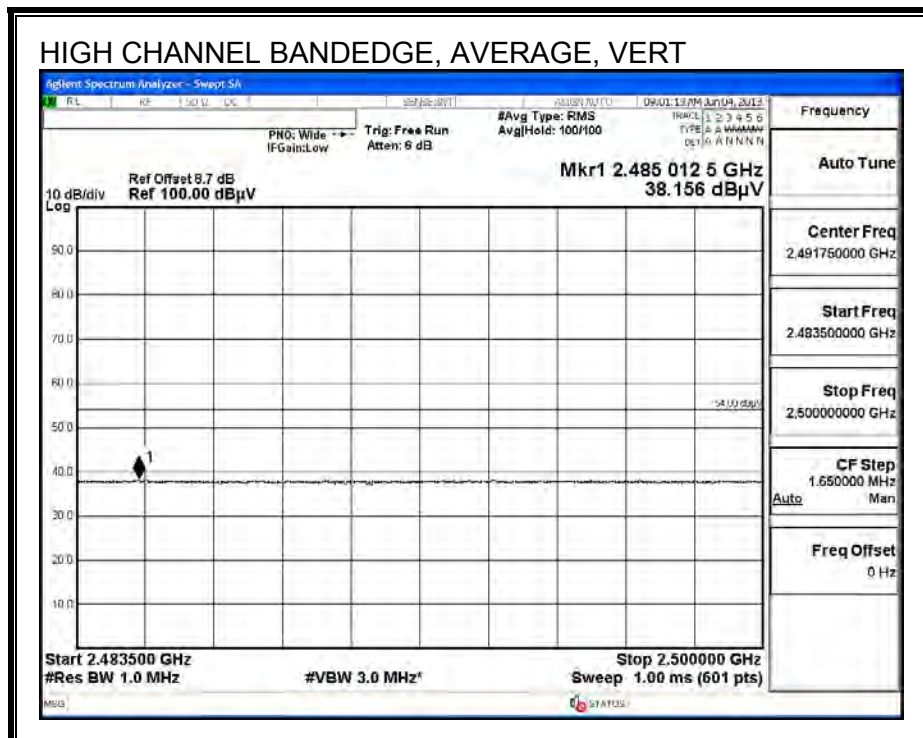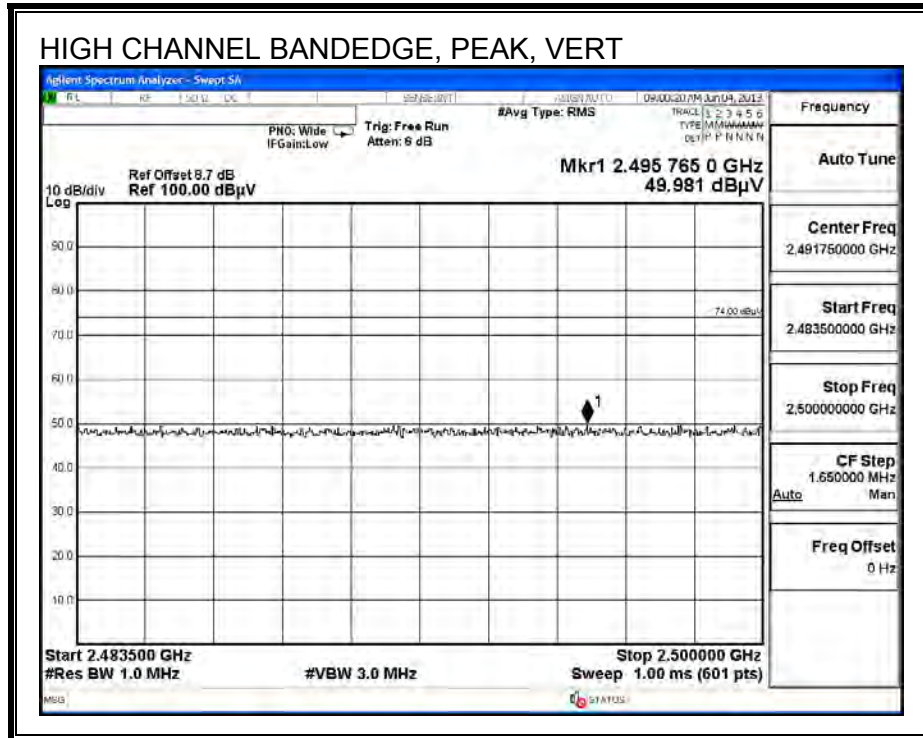


**HARMONICS AND SPURIOUS EMISSIONS**

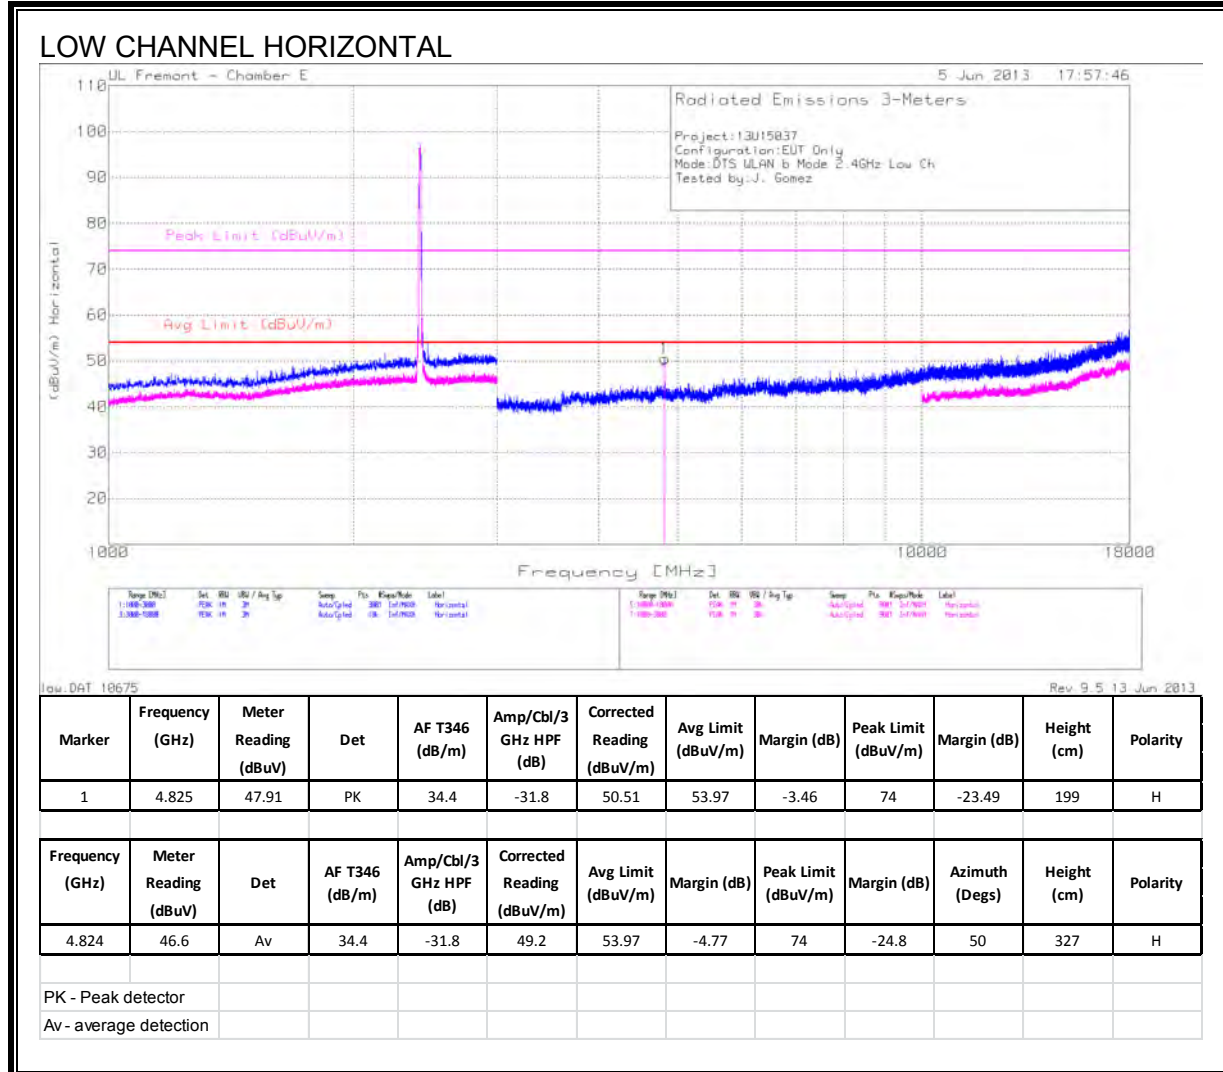


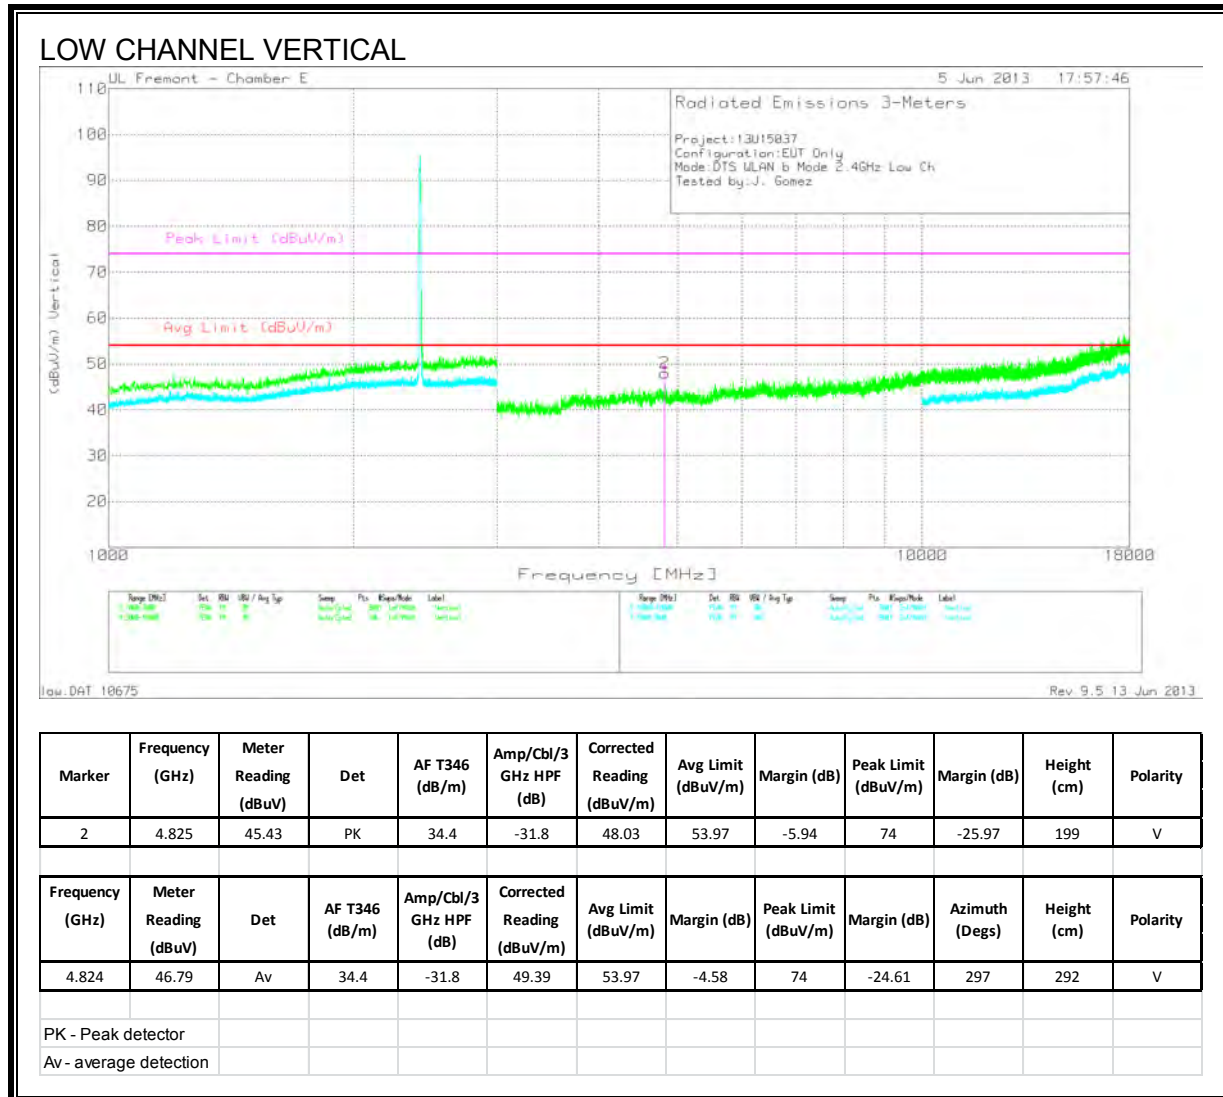


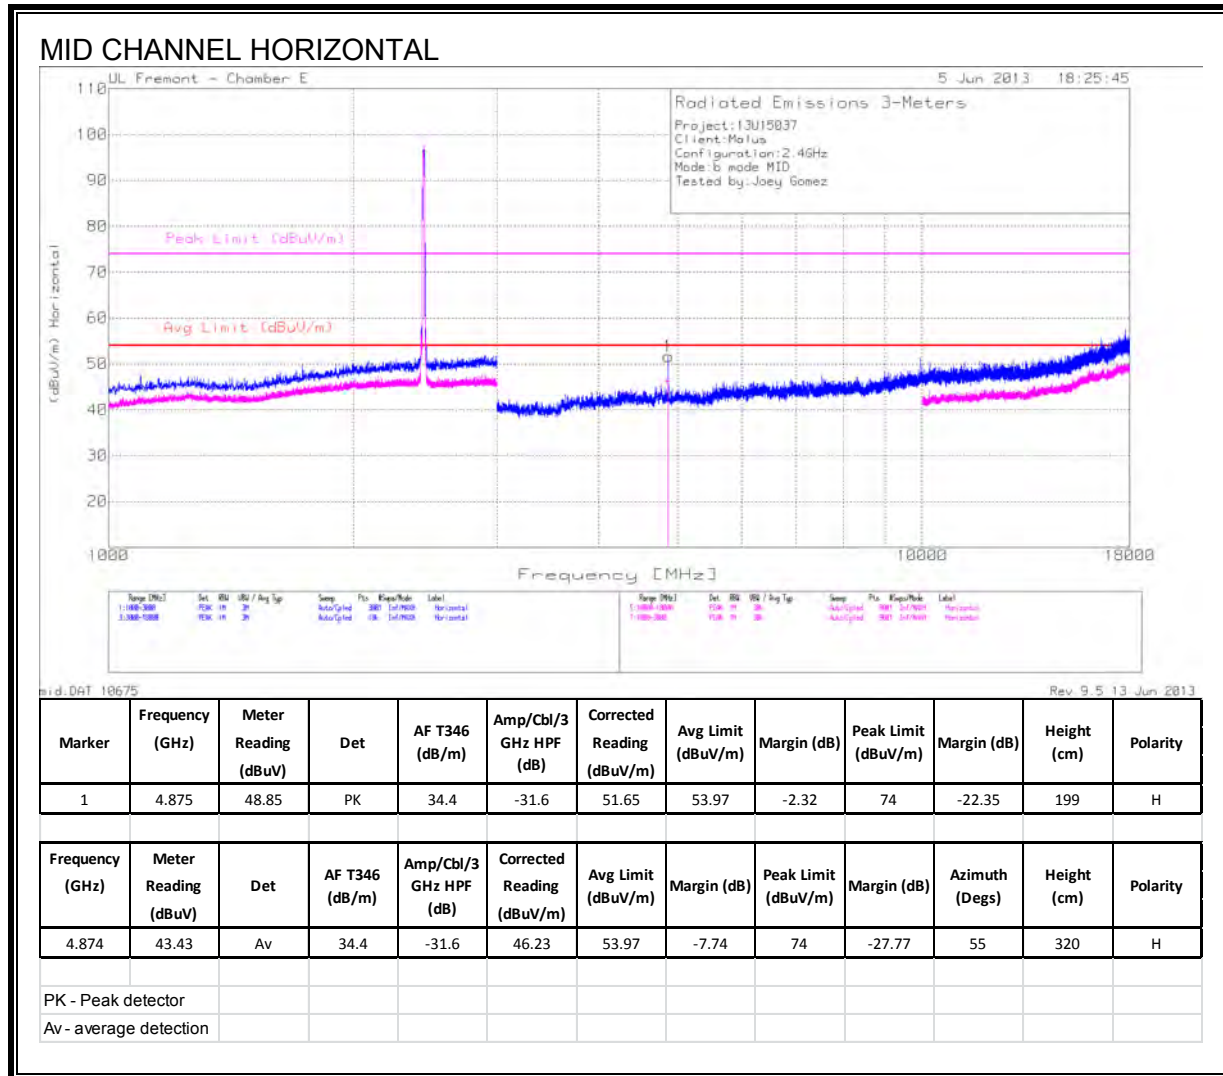

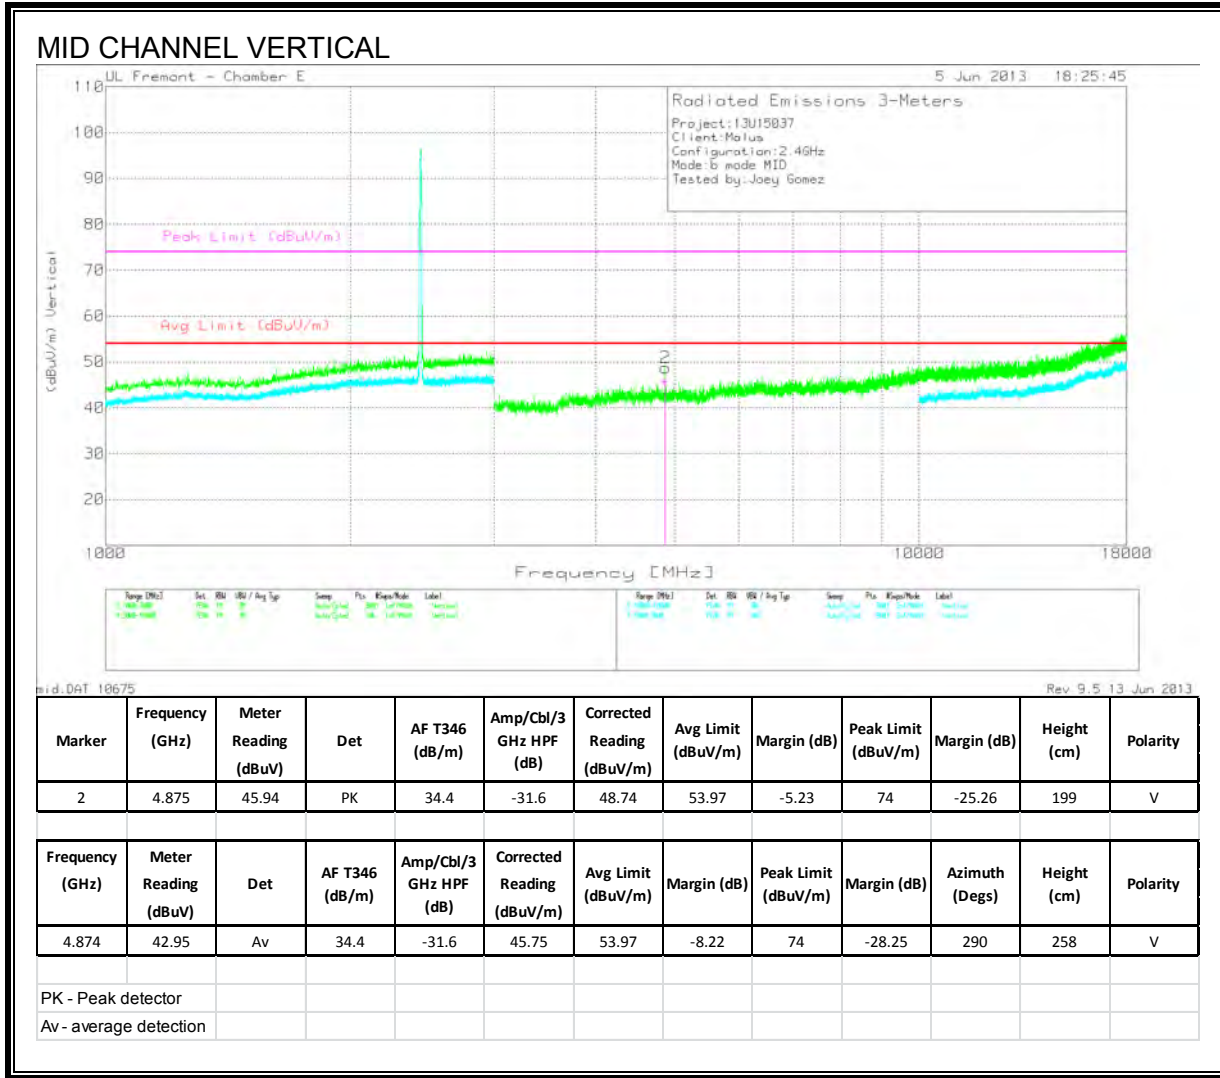






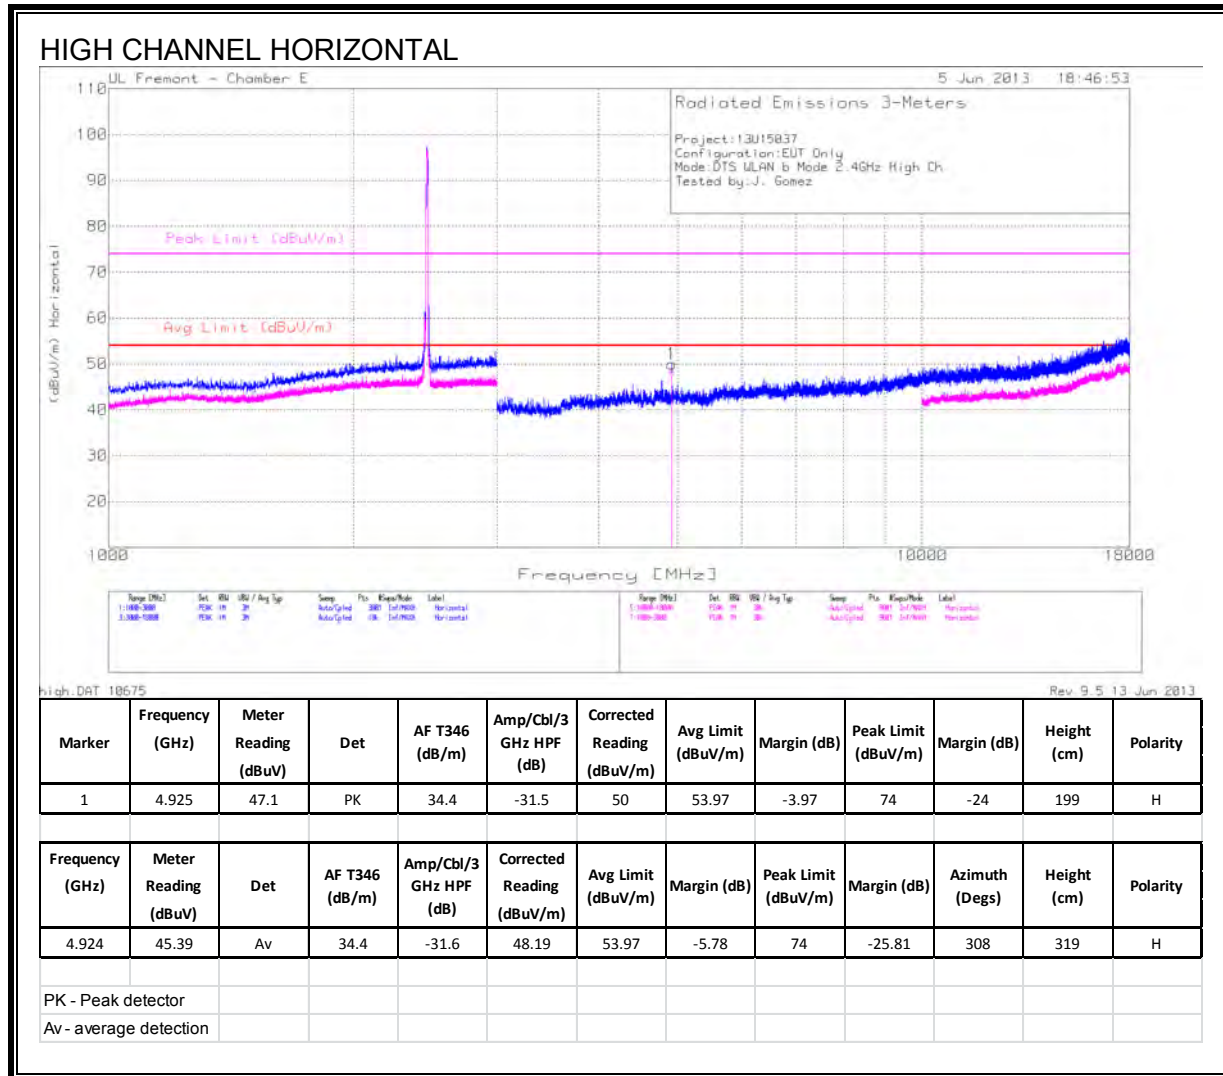


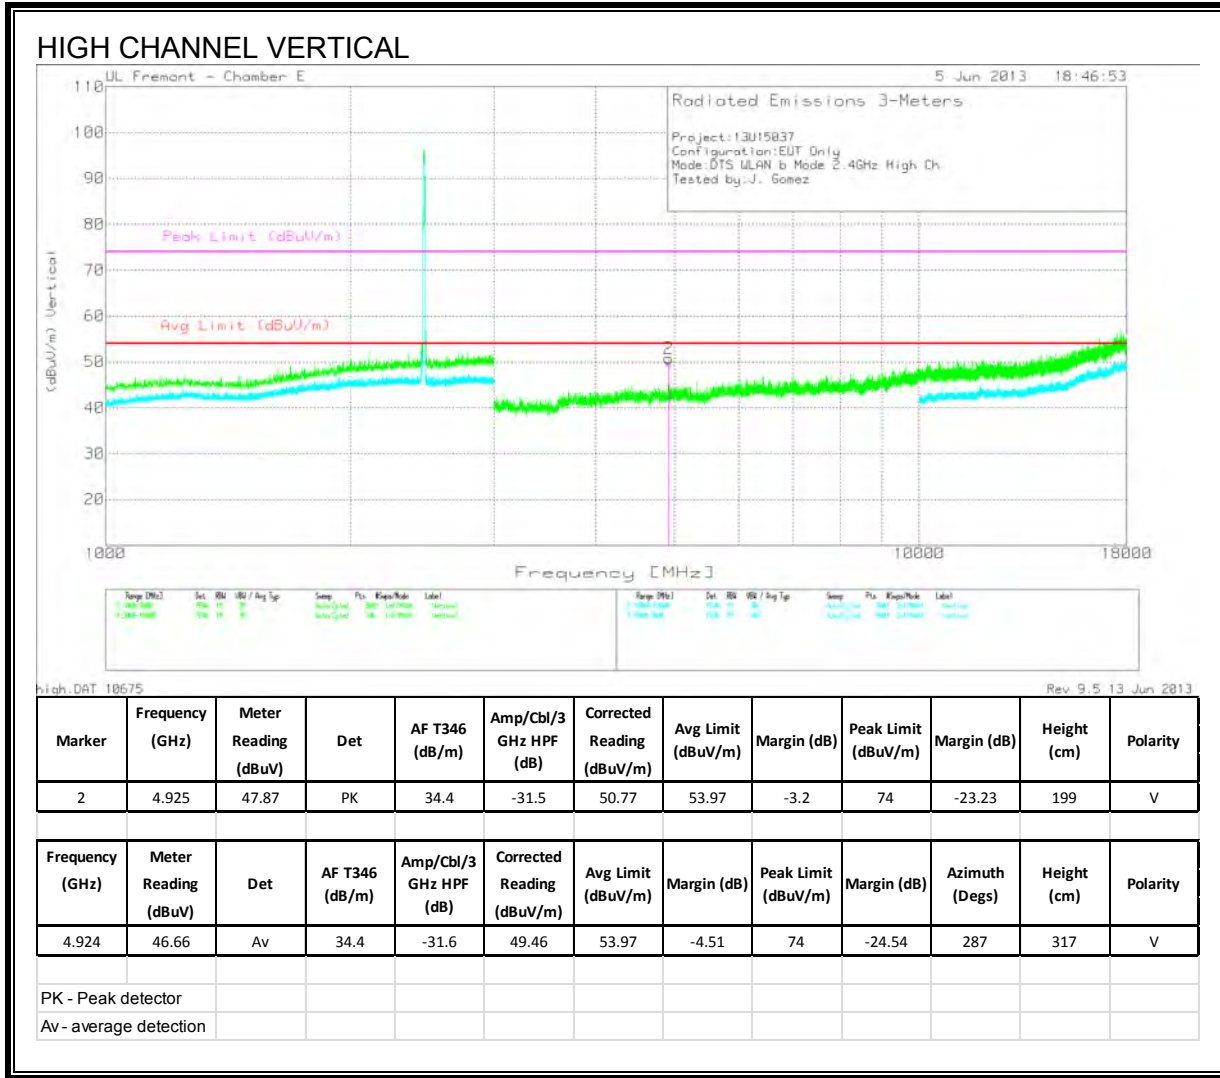



### 8.4. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND



#### RESTRICTED BANDEDGE (LOW CHANNEL)

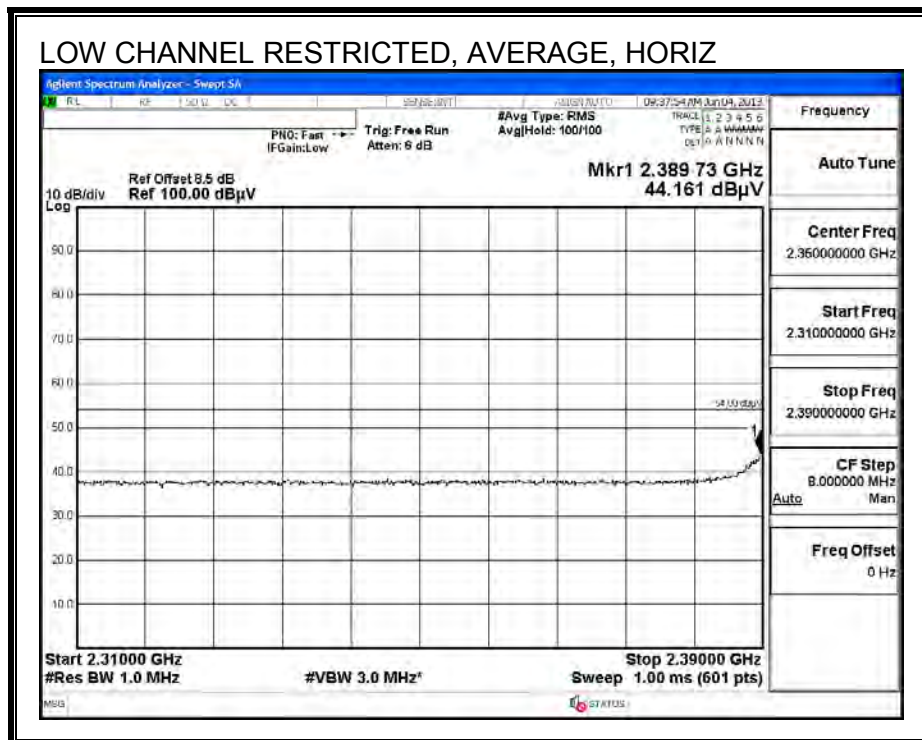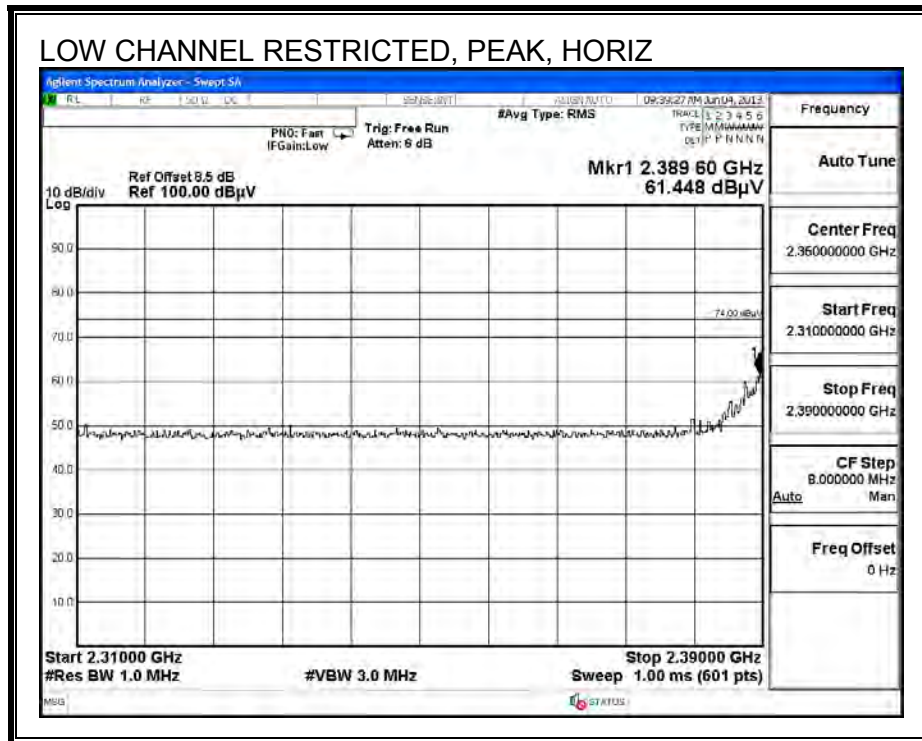

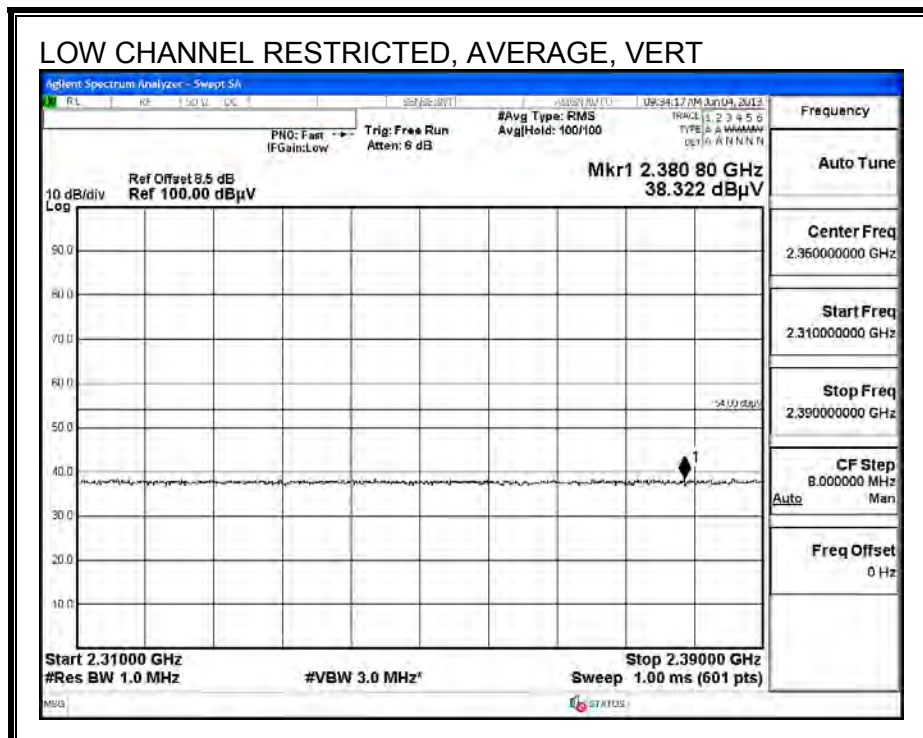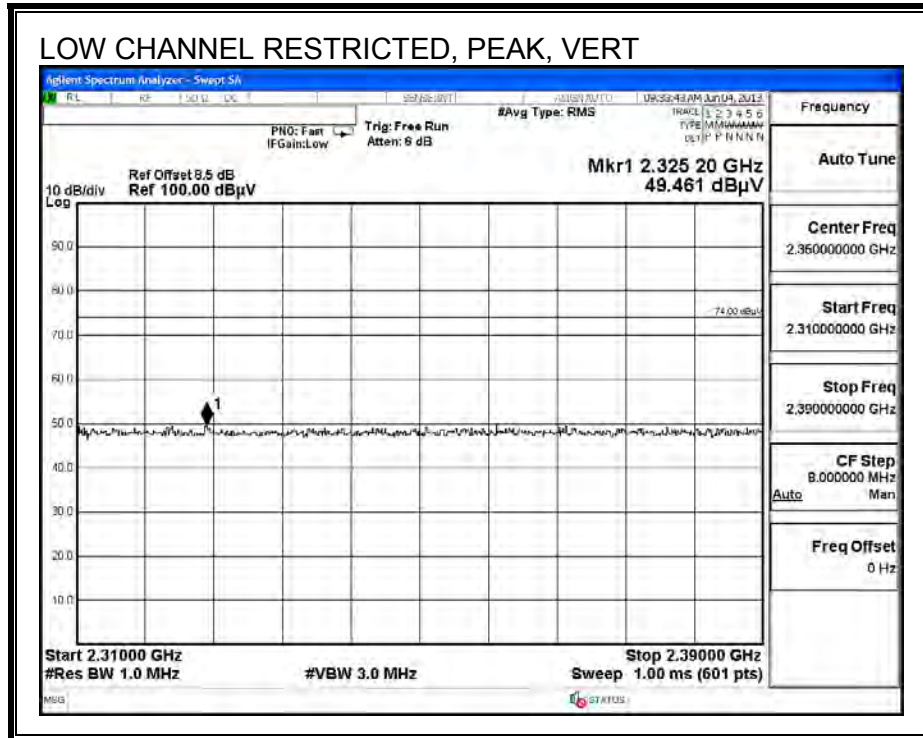


**AUTHORIZED BANDEDGE (HIGH CHANNEL)**

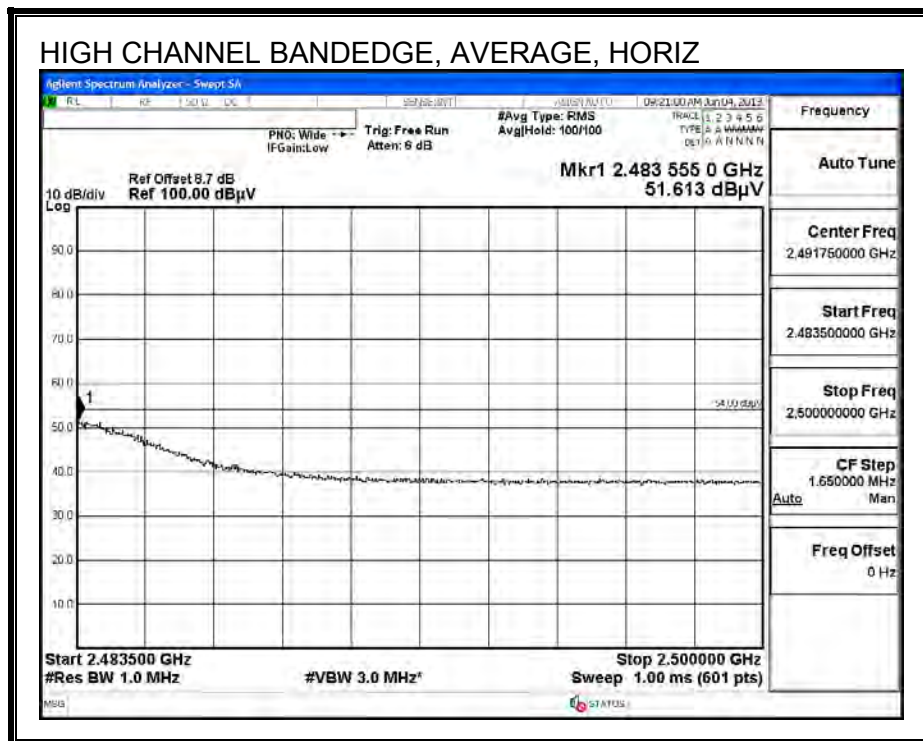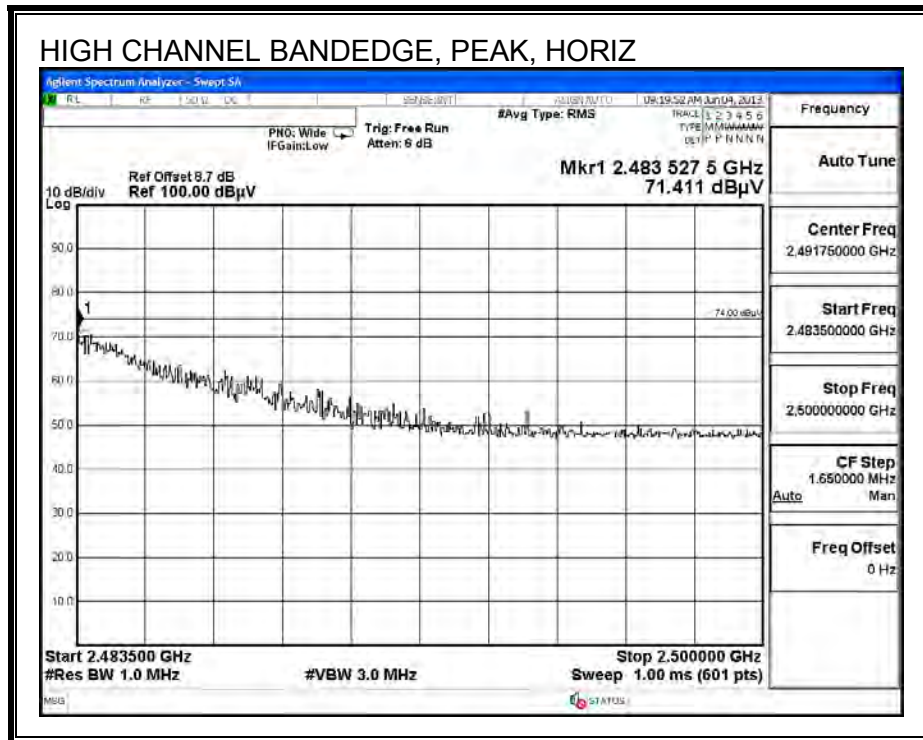

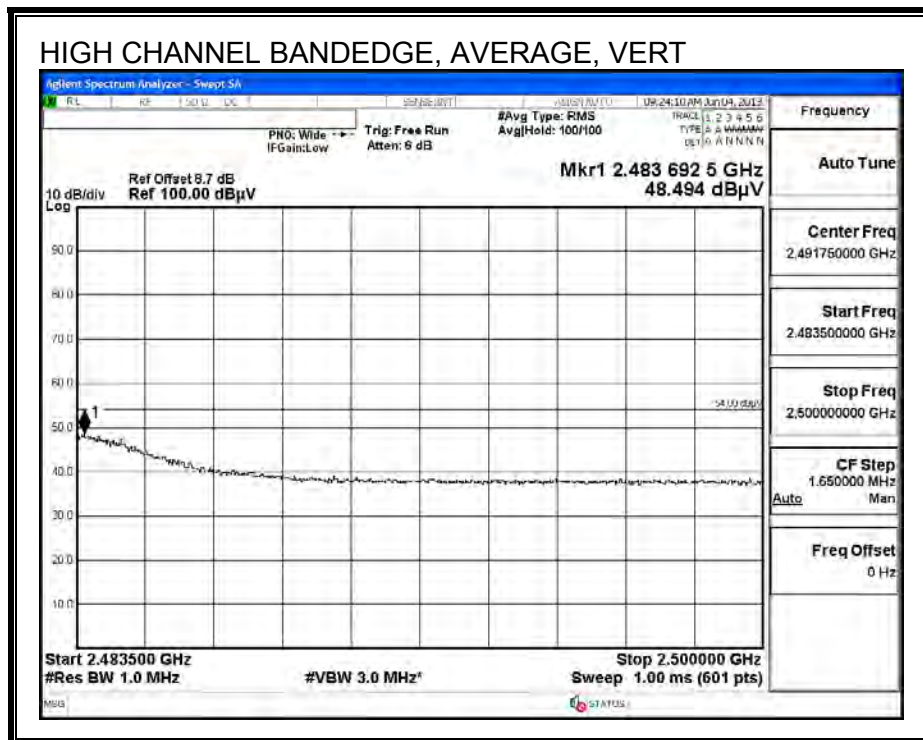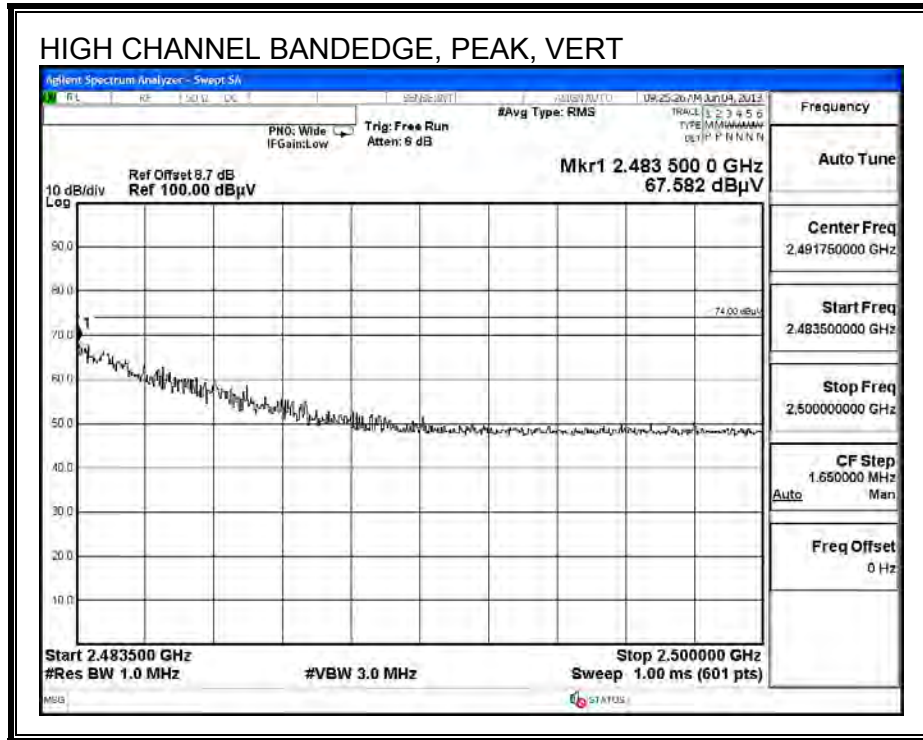

**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL HORIZONTAL**

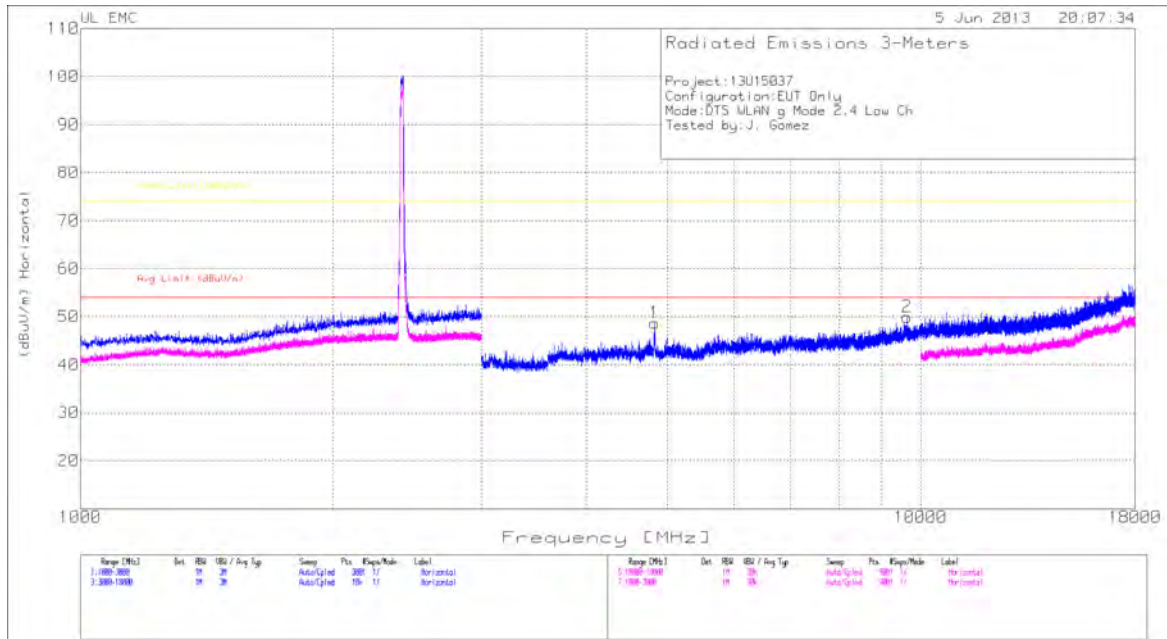


File: A31\_MLON\_2.DAT

| Horizontal | 3000 - 18000MHz |                      |          |                |                  |                            |                    |             |                     |             |             |          |  |  |  |
|------------|-----------------|----------------------|----------|----------------|------------------|----------------------------|--------------------|-------------|---------------------|-------------|-------------|----------|--|--|--|
| Marker No. | Test Frequency  | Meter Reading (dBuV) | Detector | AF T346 (dB/m) | Amp/Cbl HPF (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |  |  |  |
| 1          | 4824.899        | 46.08                | PK       | 34.4           | -31.8            | 48.68                      | 53.97              | -5.29       | 74                  | -25.32      | 199         | Horz     |  |  |  |
| 2          | 9637.965        | 37.61                | PK       | 37.6           | -25.3            | 49.91                      | 53.97              | -4.06       | 74                  | -24.09      | 199         | Horz     |  |  |  |


PK - Peak detector

LOW CHANNEL VERTICAL

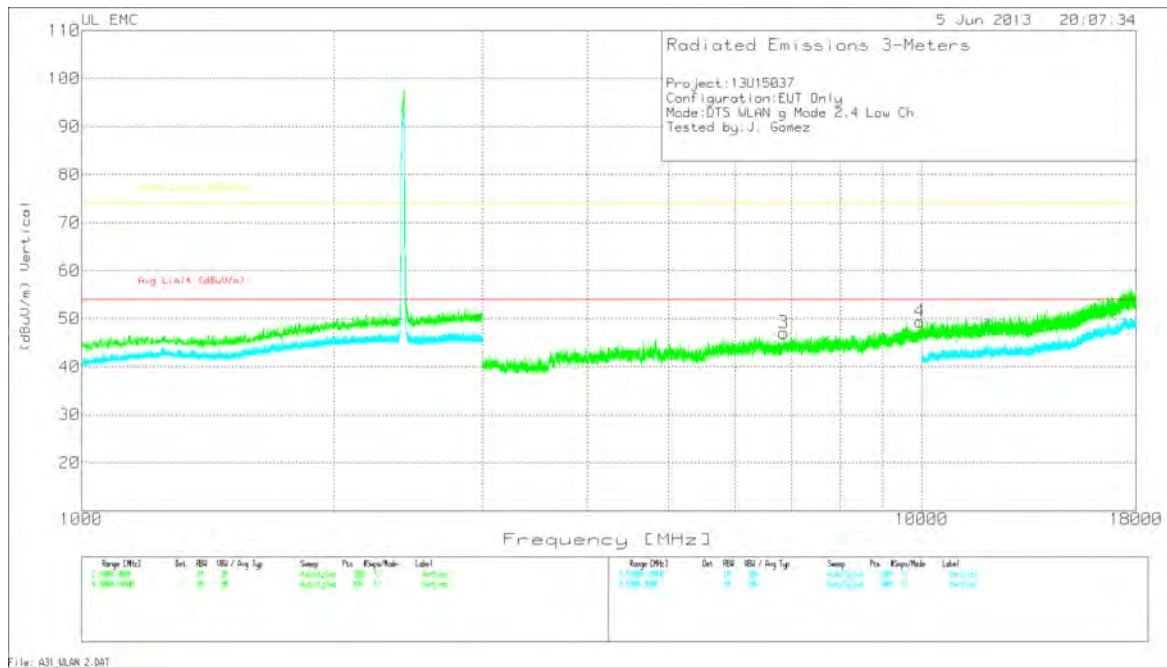


| Vertical           | 3000-18000MHz | Marker No. | Test Frequency | Meter Reading (dBuV) | Detector | AF T346 (dB/m) | Amp/Cbl /3GHz HPF (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
|--------------------|---------------|------------|----------------|----------------------|----------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|-------------|-------------|----------|
|                    |               | 3          | 6854.786       | 41.45                | PK       | 35.9           | -30.3                  | 47.05                      | 53.97              | -6.92       | 74                  | -26.95      | 199         | Vert     |
|                    |               | 4          | 9953.78        | 36.51                | PK       | 38             | -25.1                  | 49.41                      | 53.97              | -4.56       | 74                  | -24.59      | 199         | Vert     |
| PK - Peak detector |               |            |                |                      |          |                |                        |                            |                    |             |                     |             |             |          |



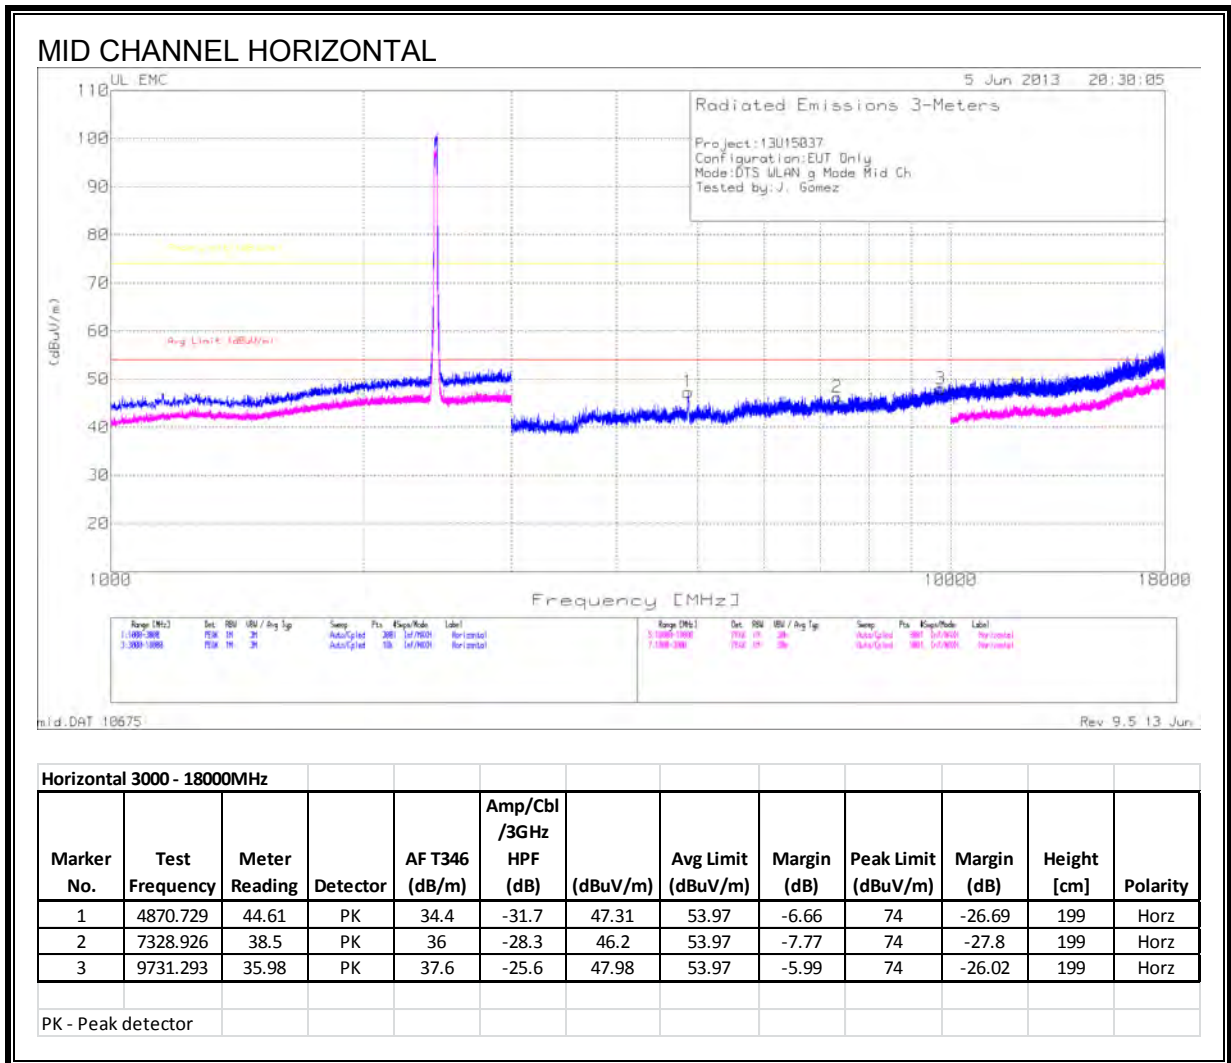


MID CHANNEL VERTICAL

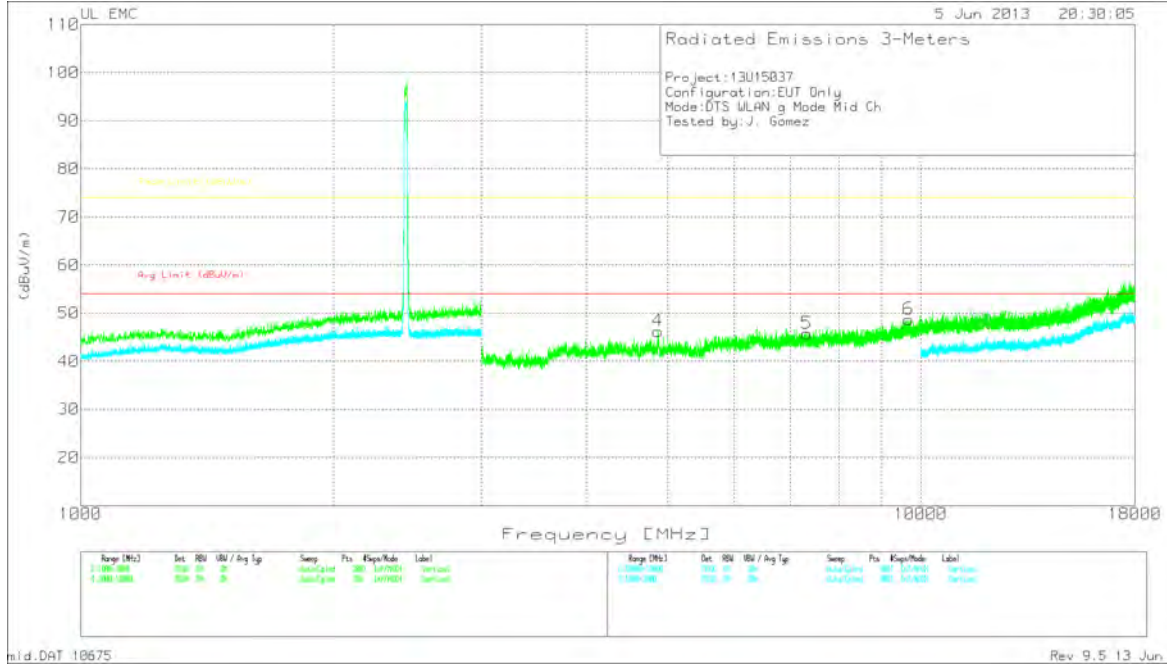

| Vertical 3000 - 18000MHz |                |               |          |                |                        |          |                    |             |                     |             |             |          |
|--------------------------|----------------|---------------|----------|----------------|------------------------|----------|--------------------|-------------|---------------------|-------------|-------------|----------|
| Marker No.               | Test Frequency | Meter Reading | Detector | AF T346 (dB/m) | Amp/Cbl /3GHz HPF (dB) | (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
| 4                        | 4867.396       | 43.61         | PK       | 34.4           | -31.8                  | 46.21    | 53.97              | -7.76       | 74                  | -27.79      | 199         | Vert     |
| 5                        | 7319.76        | 38.23         | PK       | 36             | -28.5                  | 45.73    | 53.97              | -8.24       | 74                  | -28.27      | 199         | Vert     |
| 6                        | 9682.129       | 36.31         | PK       | 37.6           | -25.2                  | 48.71    | 53.97              | -5.26       | 74                  | -25.29      | 199         | Vert     |


PK - Peak detector

HIGH CHANNEL HORIZONTAL

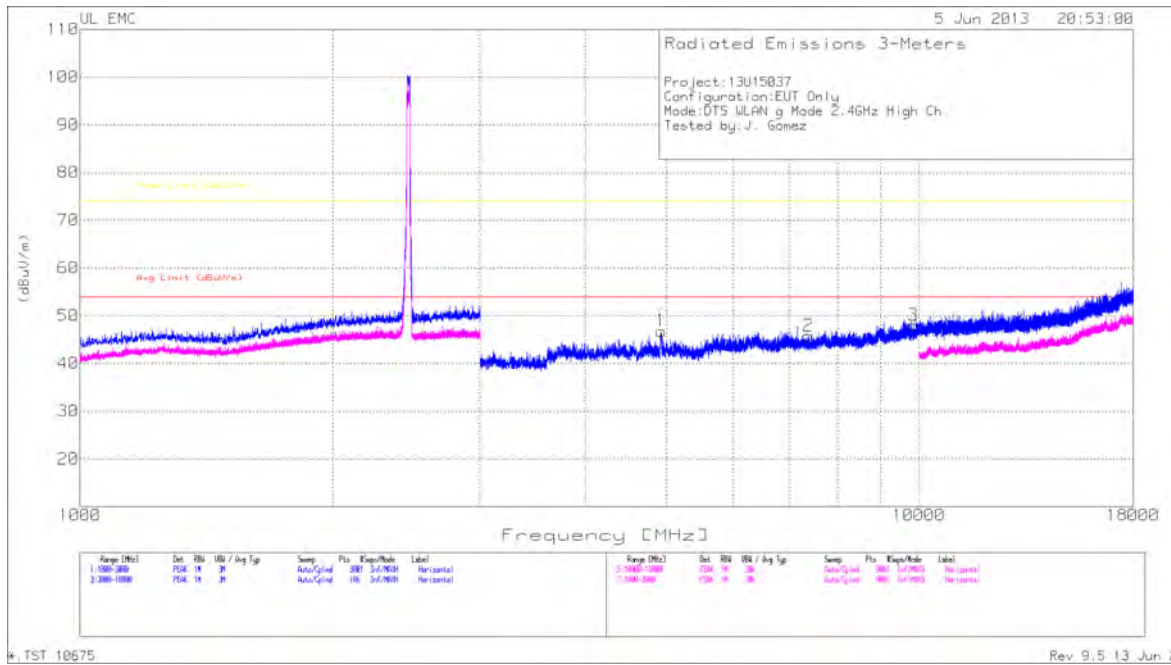

| Horizontal         |            |                |                      |          |               |                        |                            |                    |             |                     |             |             |          |
|--------------------|------------|----------------|----------------------|----------|---------------|------------------------|----------------------------|--------------------|-------------|---------------------|-------------|-------------|----------|
| 3000-18000MHz      | Marker No. | Test Frequency | Meter Reading (dBuV) | Detector | AFT346 (dB/m) | Amp/Cbl /3GHz HPF (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
|                    | 1          | 4824.899       | 46.08                | PK       | 34.4          | -31.8                  | 48.68                      | 53.97              | -5.29       | 74                  | -25.32      | 199         | Horz     |
|                    | 2          | 7110.605       | 39.53                | PK       | 36            | -29.3                  | 46.23                      | 53.97              | -7.74       | 74                  | -27.77      | 199         | Horz     |
|                    | 3          | 9637.965       | 37.61                | PK       | 37.6          | -25.3                  | 49.91                      | 53.97              | -4.06       | 74                  | -24.09      | 199         | Horz     |
| PK - Peak detector |            |                |                      |          |               |                        |                            |                    |             |                     |             |             |          |

### HIGH CHANNEL VERTICAL


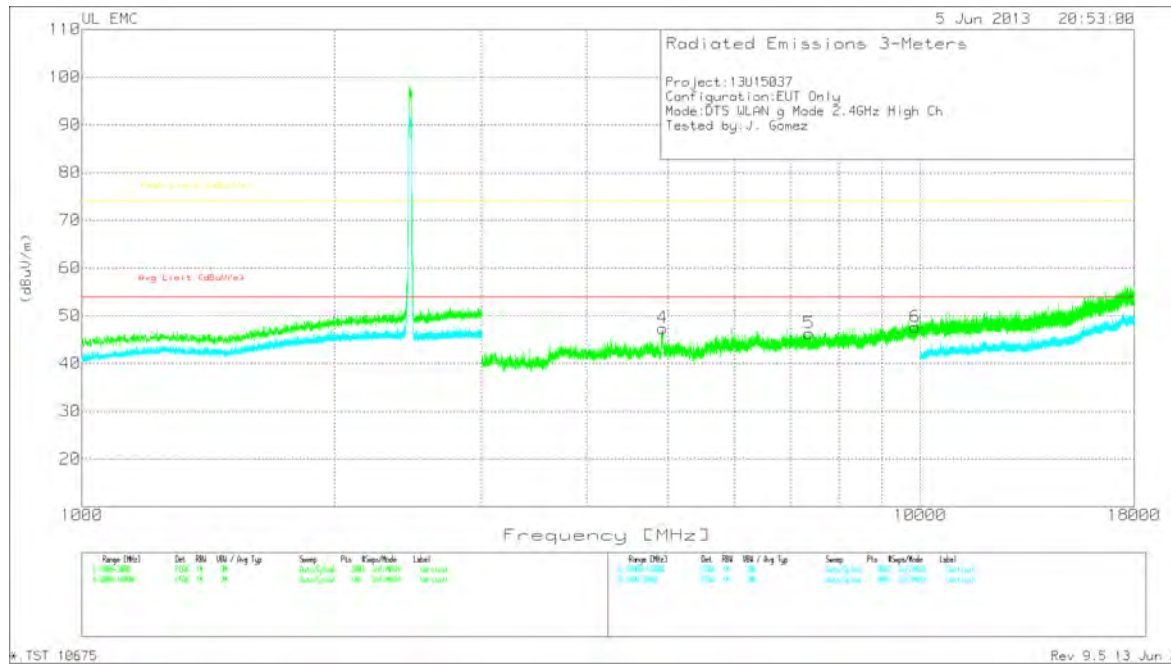




| Vertical | 3000 - | 18000MHz | Marker No. | Test Frequency | Meter Reading(d BuV) | Detector | AF T346 (dB/m) | Amp/Cbl /3GHz HPF (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
|----------|--------|----------|------------|----------------|----------------------|----------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|-------------|-------------|----------|
|          |        |          | 4          | 4826.565       | 42.96                | PK       | 34.4           | -31.7                  | 45.66                      | 53.97              | -8.31       | 74                  | -28.34      | 199         | Vert     |
|          |        |          | 5          | 7081.44        | 40.08                | PK       | 36             | -28.9                  | 47.18                      | 53.97              | -6.79       | 74                  | -26.82      | 199         | Vert     |
|          |        |          | 6          | 9953.78        | 36.51                | PK       | 38             | -25.1                  | 49.41                      | 53.97              | -4.56       | 74                  | -24.59      | 199         | Vert     |

PK - Peak detector



### 8.5. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND



#### RESTRICTED BANDEDGE (LOW CHANNEL)

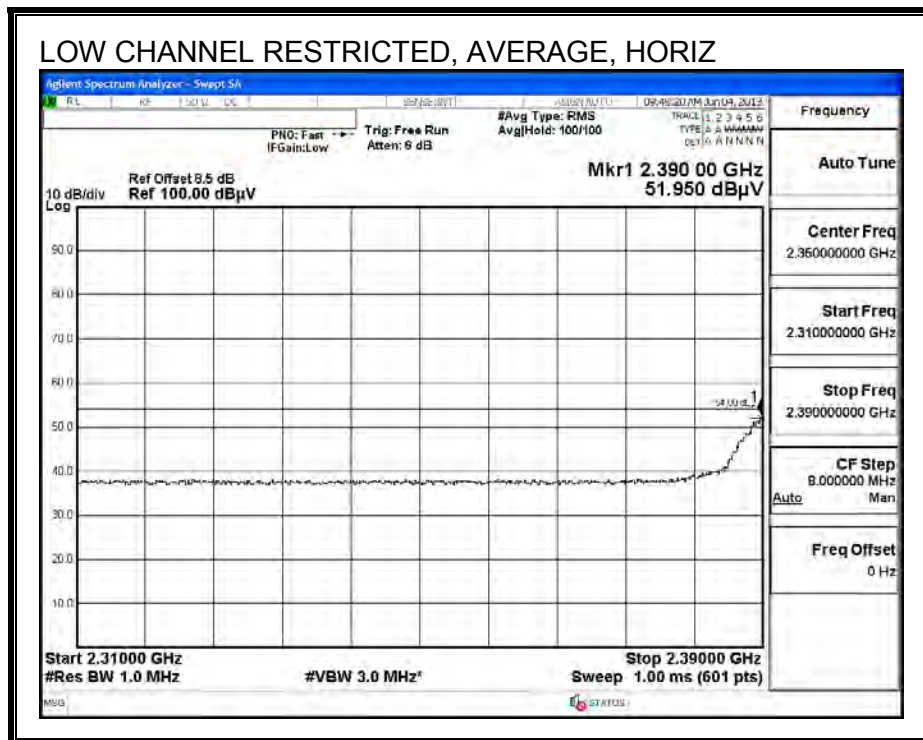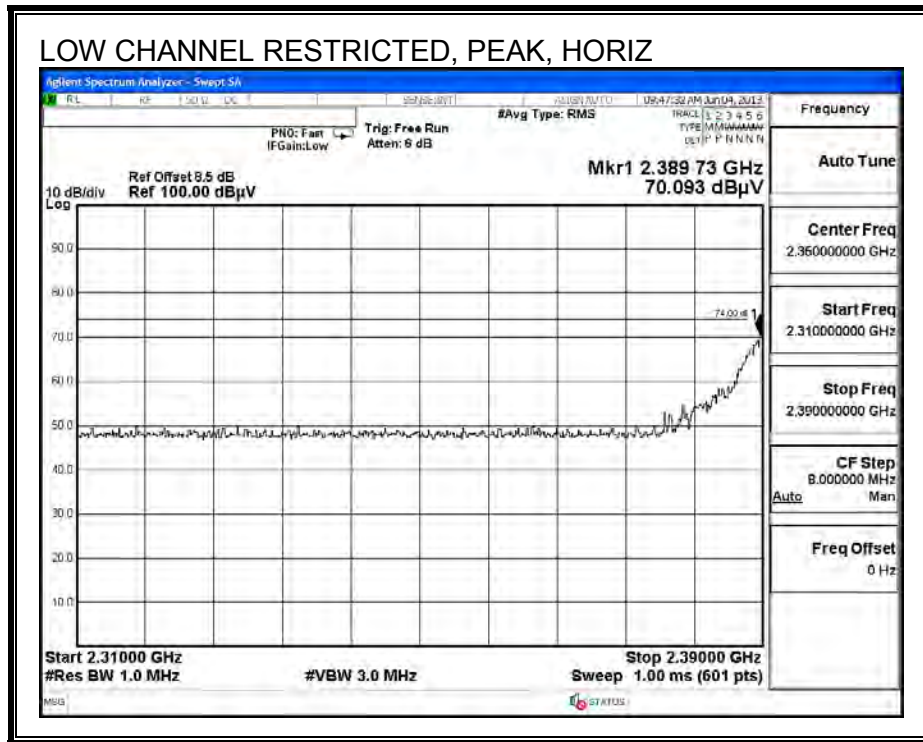

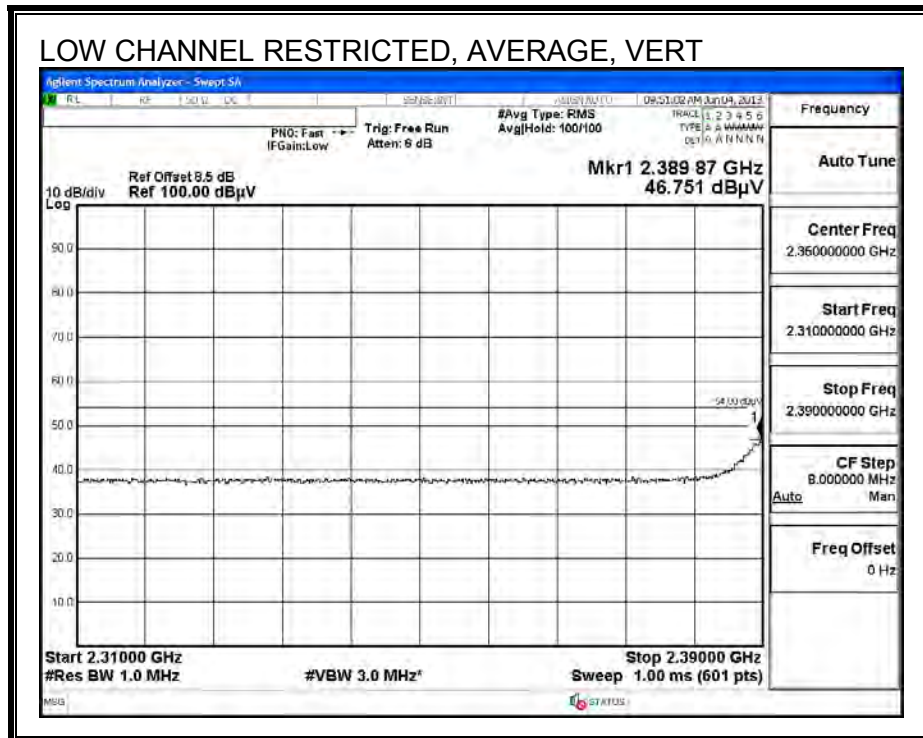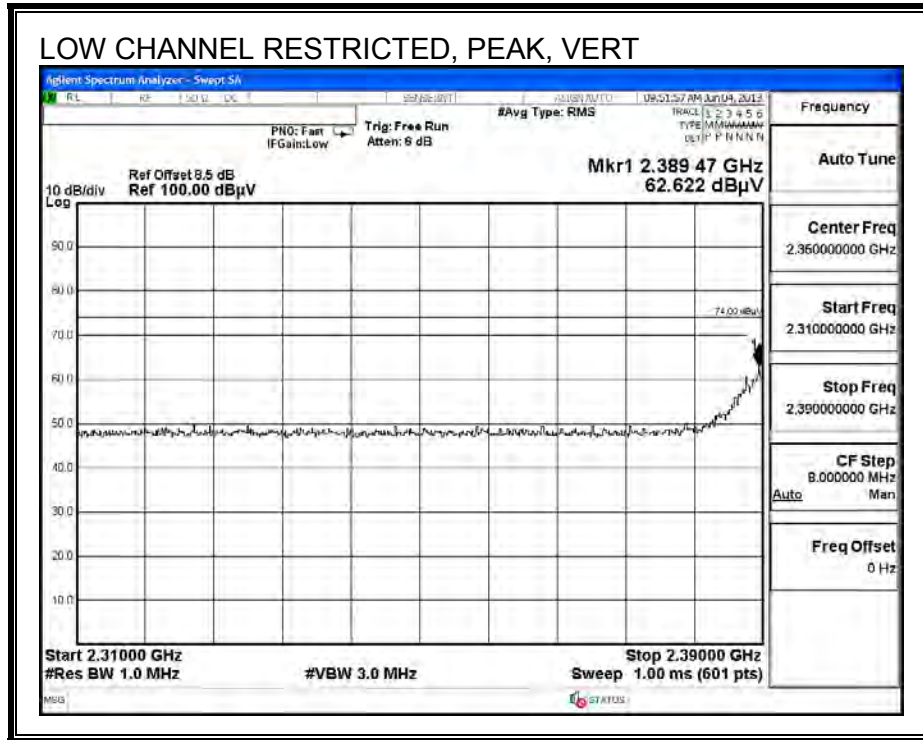


**AUTHORIZED BANDEDGE (HIGH CHANNEL)**

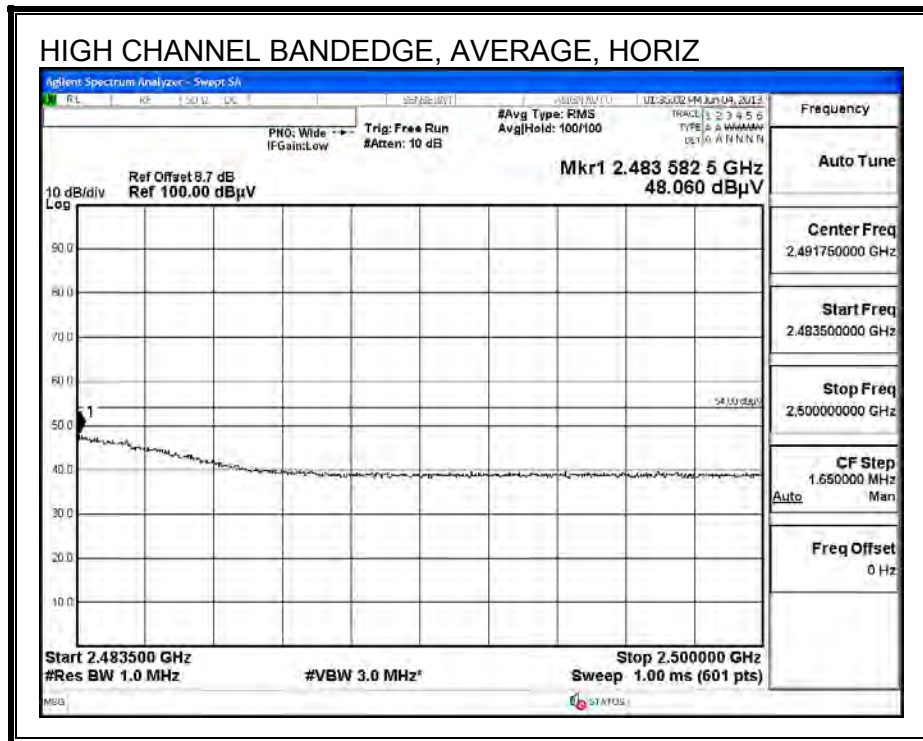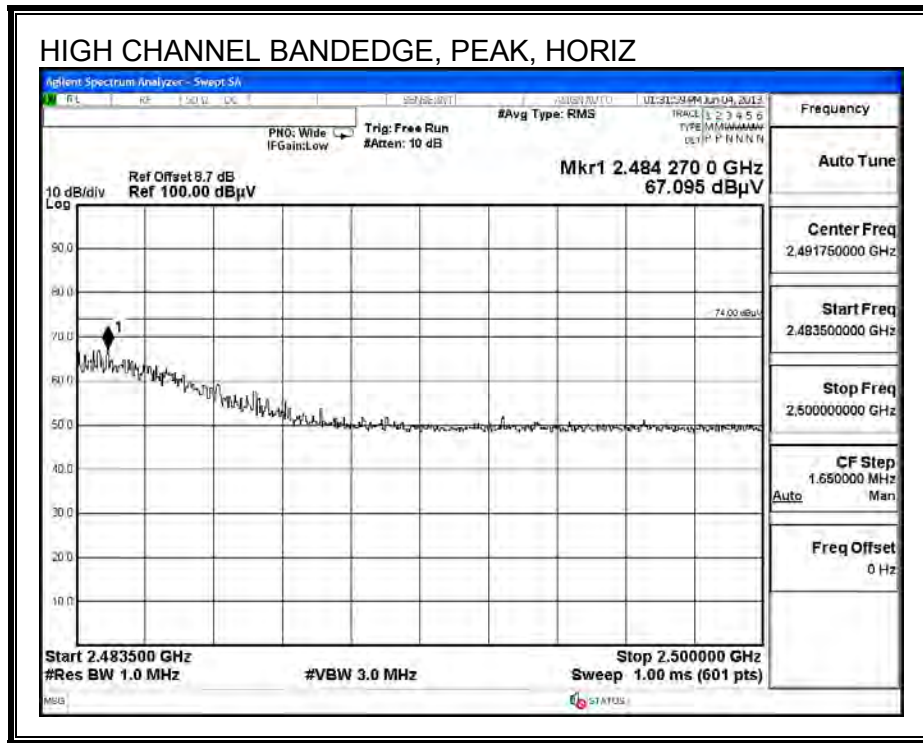


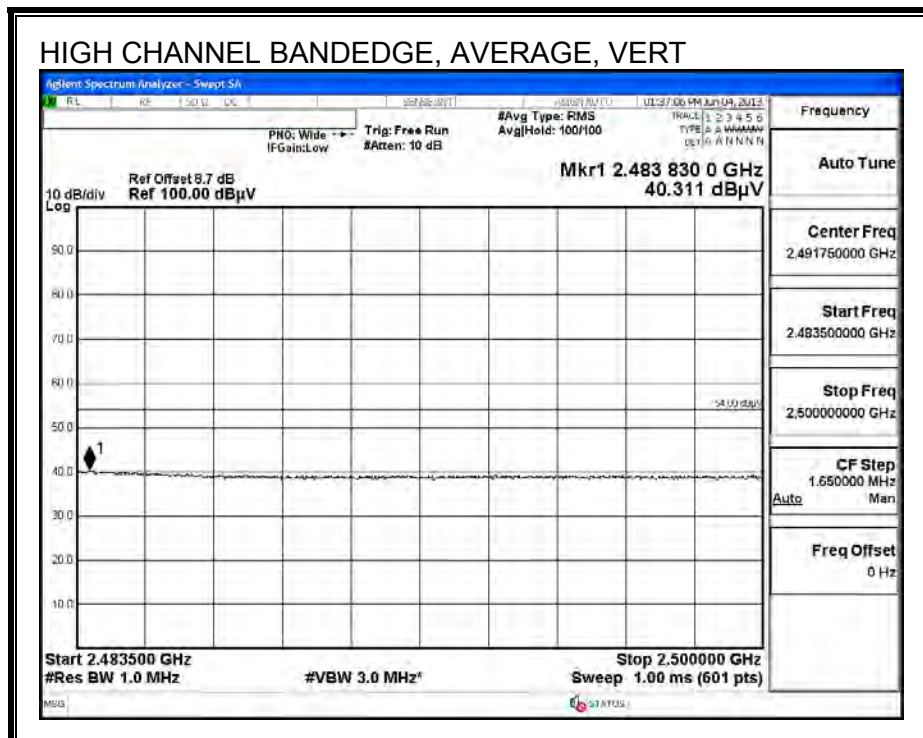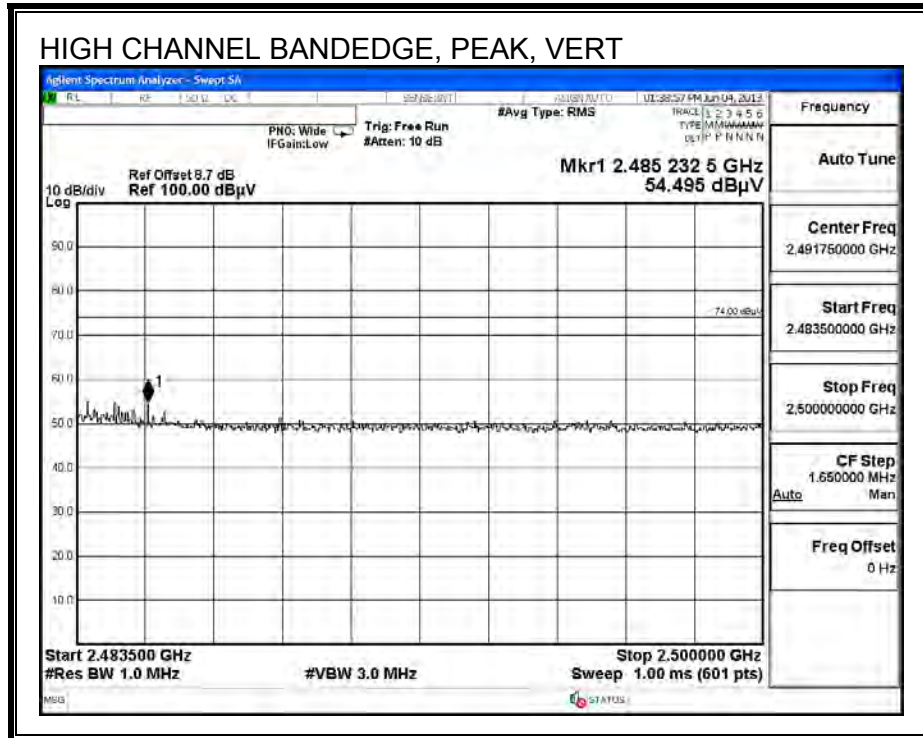





**HARMONICS AND SPURIOUS EMISSIONS**

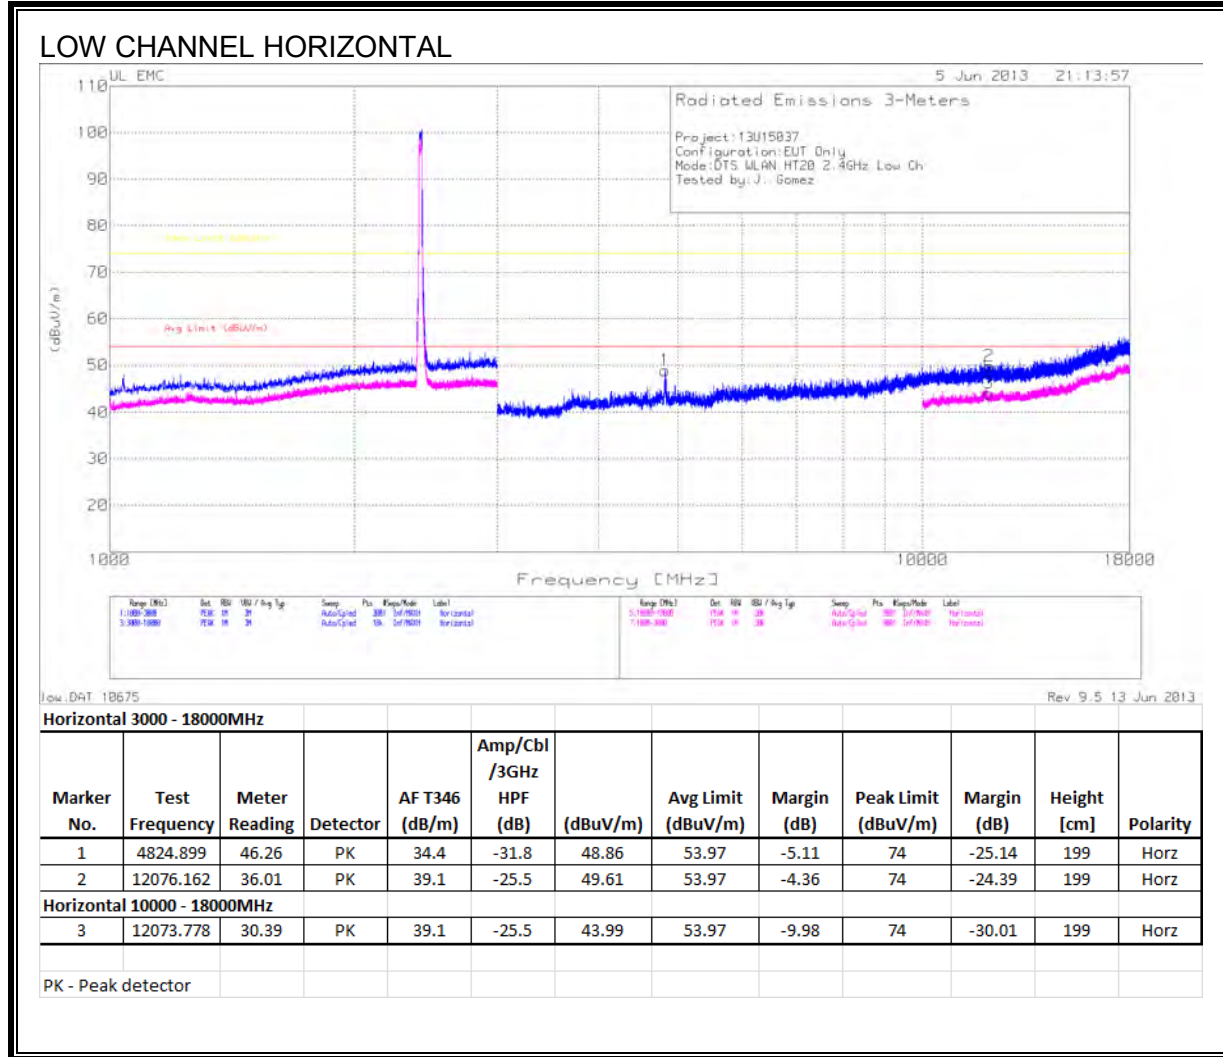

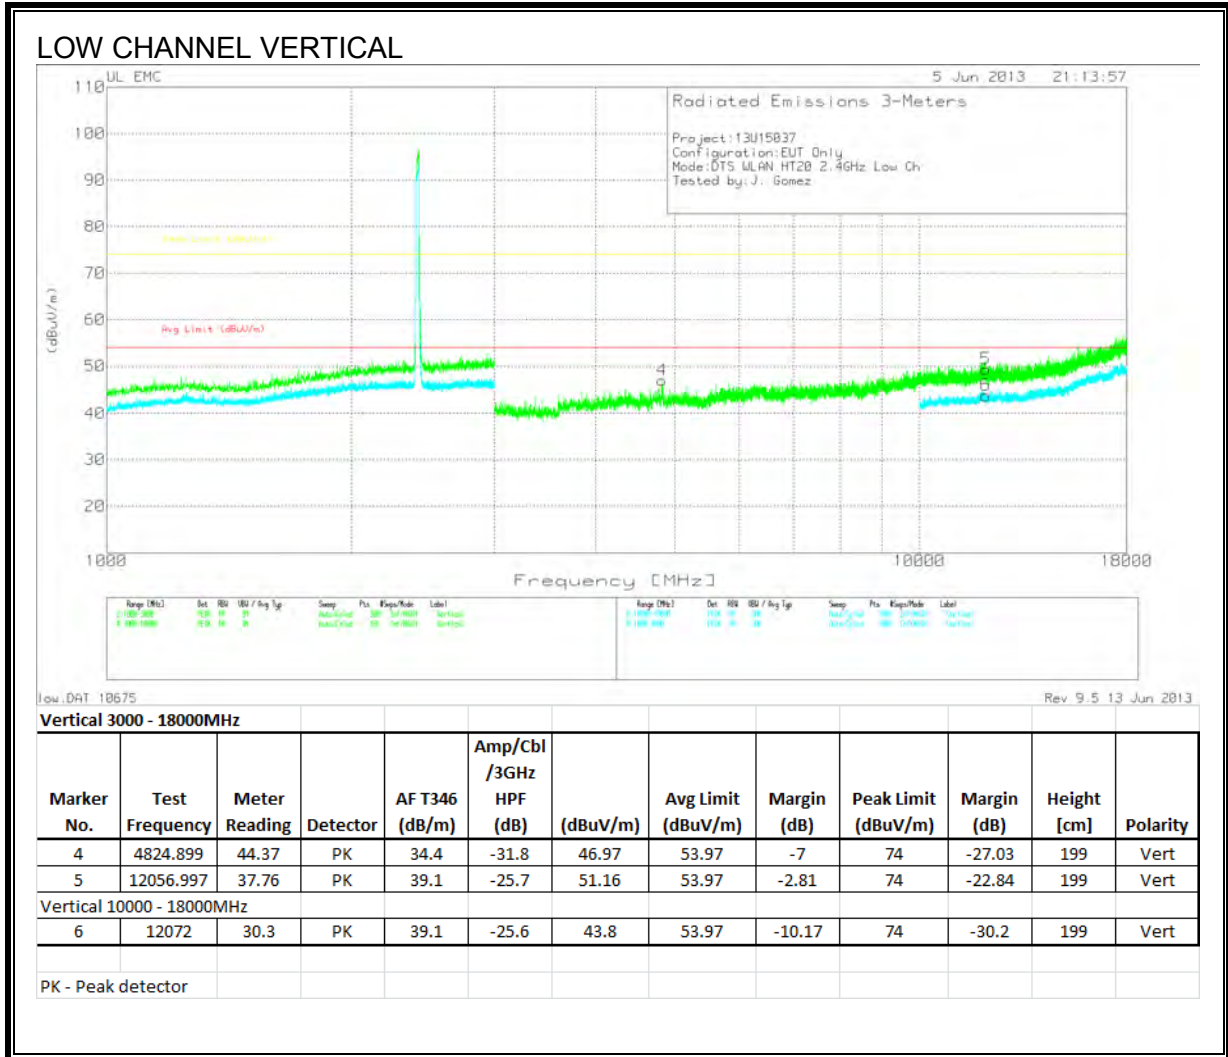

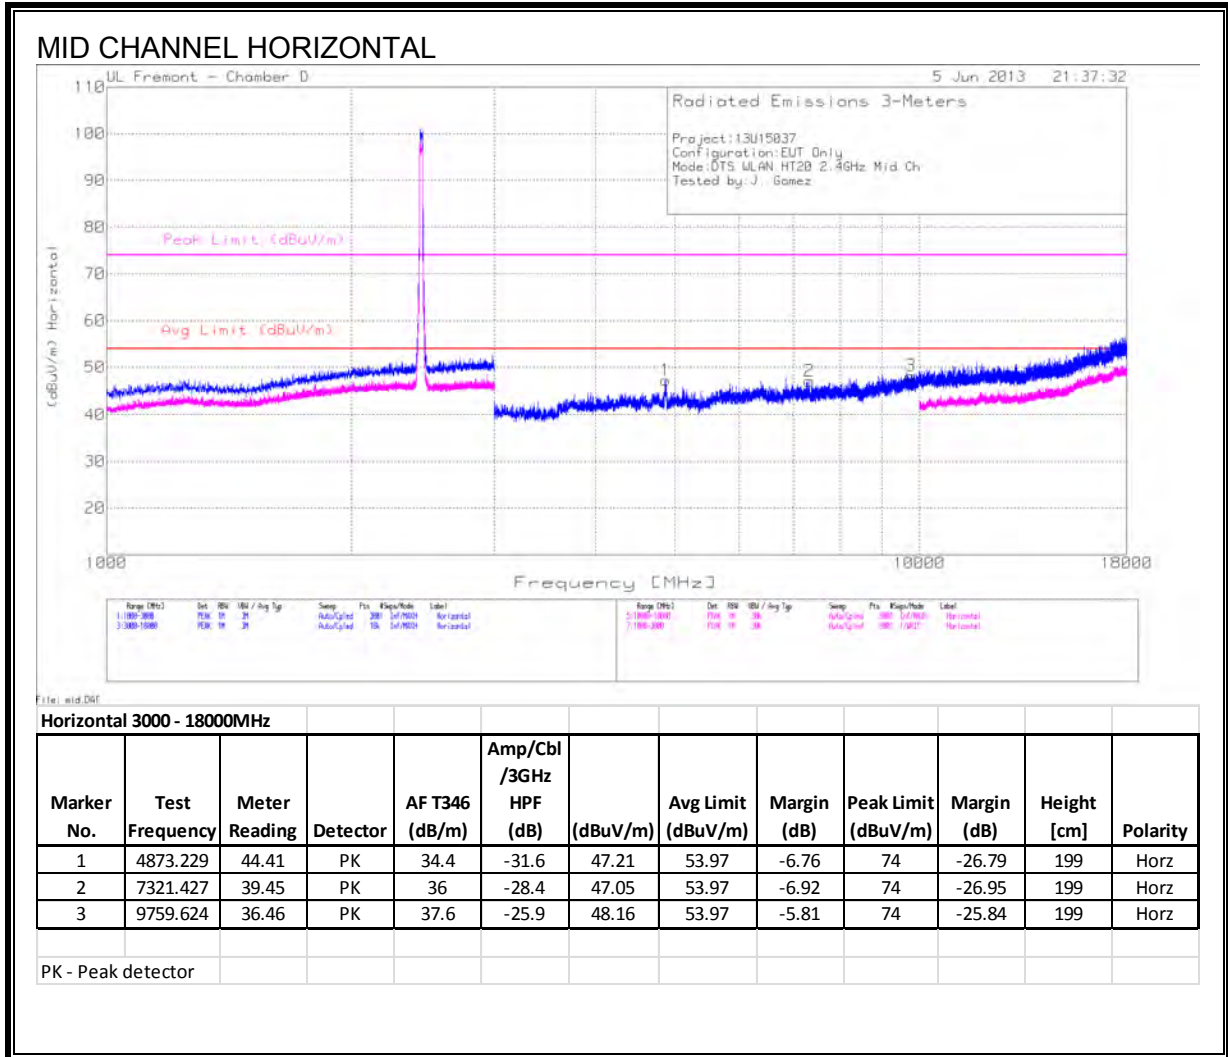

MID CHANNEL VERTICAL

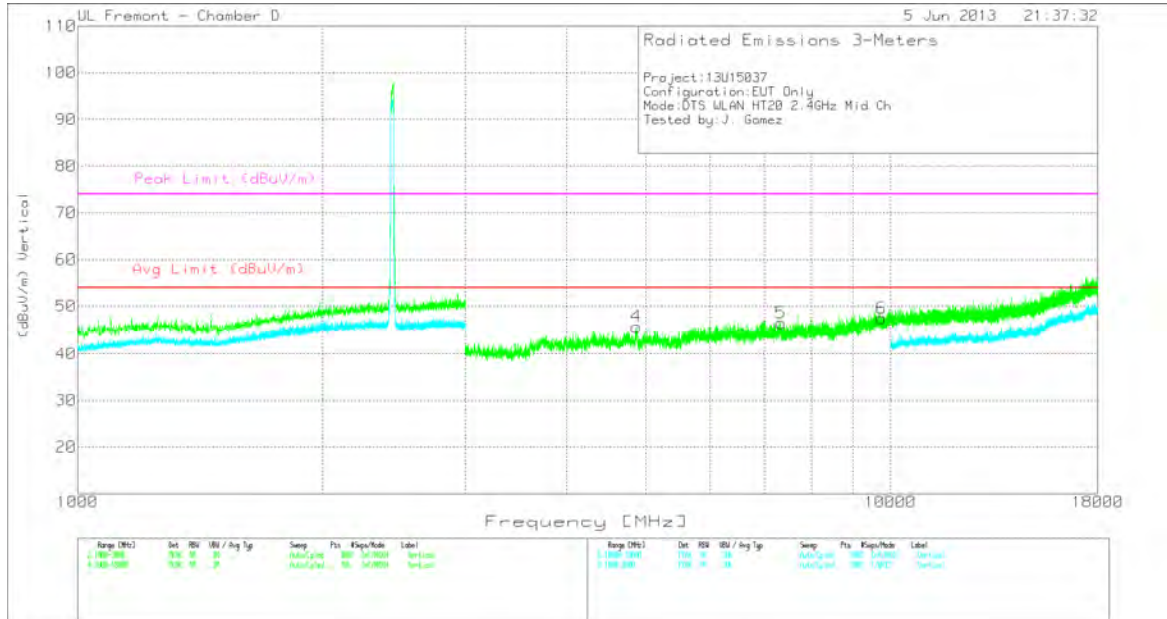


File: mid.DAT

Vertical 3000 - 18000MHz

| Marker No. | Test Frequency | Meter Reading | Detector | AF T346 (dB/m) | Amp/Cbl /3GHz HPF (dB) | (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
|------------|----------------|---------------|----------|----------------|------------------------|----------|--------------------|-------------|---------------------|-------------|-------------|----------|
| 4          | 4872.396       | 42.92         | PK       | 34.4           | -31.7                  | 45.62    | 53.97              | -8.35       | 74                  | -28.38      | 199         | Vert     |
| 5          | 7693.906       | 40.21         | PK       | 36.2           | -28.2                  | 48.21    | 53.97              | -5.76       | 74                  | -25.79      | 199         | Vert     |
| 6          | 9722.96        | 36.2          | PK       | 37.6           | -25.5                  | 48.3     | 53.97              | -5.67       | 74                  | -25.7       | 199         | Vert     |

PK - Peak detector


HIGH CHANNEL HORIZONTAL

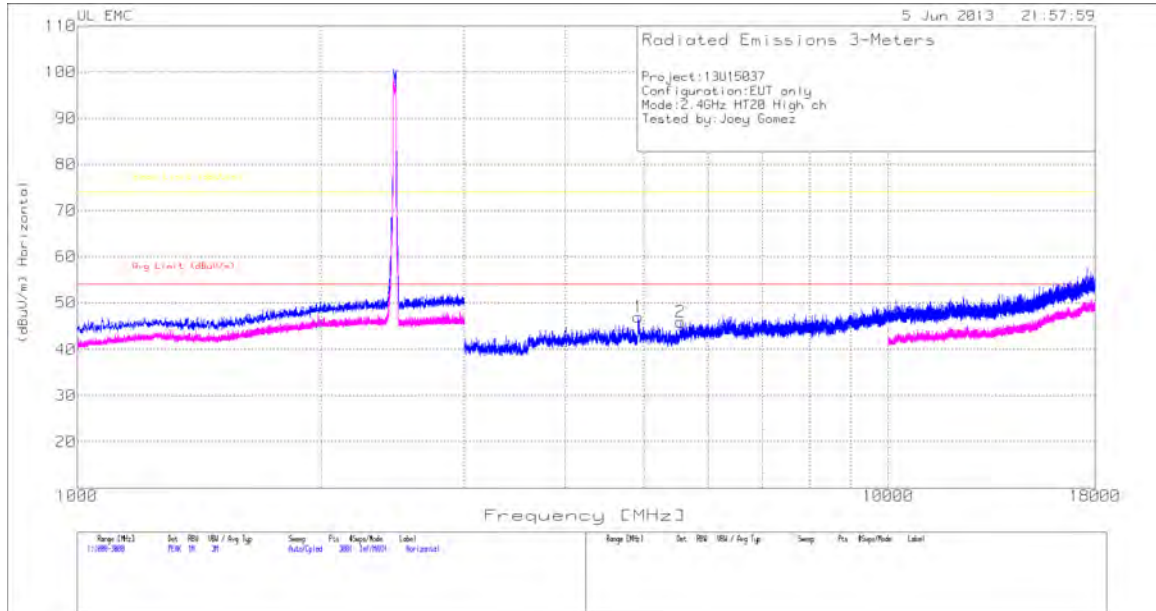

File: high\_001

| Marker No.                 | Test Frequency | Meter Reading (dBuV) | Detector | AF T346 (dB/m) | Amp/Cbl /3GHz HPF (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
|----------------------------|----------------|----------------------|----------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|-------------|-------------|----------|
| Horizontal 3000 - 18000MHz |                |                      |          |                |                        |                            |                    |             |                     |             |             |          |
| 1                          | 4922.393       | 44.11                | PK       | 34.4           | -31.6                  | 46.91                      | 53.97              | -7.06       | 74                  | -27.09      | 199         | Horz     |
| 2                          | 5549.858       | 41.89                | PK       | 34.9           | -30.9                  | 45.89                      | 53.97              | -8.08       | 74                  | -28.11      | 199         | Horz     |
| PK - Peak detector         |                |                      |          |                |                        |                            |                    |             |                     |             |             |          |

### HIGH CHANNEL VERTICAL

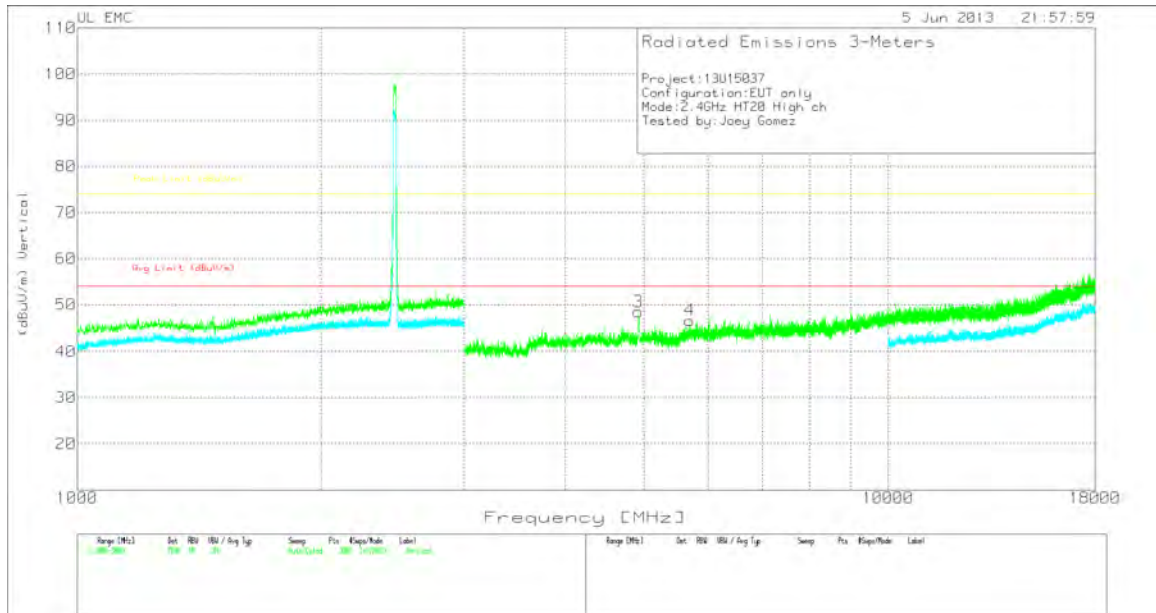



File: high\_001

| Marker No.               | Test Frequency | Meter Reading (dBuV) | Detector | AF T346 (dB/m) | Amp/Cbl /3GHz HPF (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
|--------------------------|----------------|----------------------|----------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|-------------|-------------|----------|
| Vertical 3000 - 18000MHz |                |                      |          |                |                        |                            |                    |             |                     |             |             |          |
| 3                        | 4921.56        | 45.66                | PK       | 34.4           | -31.6                  | 48.46                      | 53.97              | -5.51       | 74                  | -25.54      | 199         | Vert     |
| 4                        | 5695.684       | 41.5                 | PK       | 35.3           | -30.2                  | 46.6                       | 53.97              | -7.37       | 74                  | -27.4       | 199         | Vert     |
| PK - Peak detector       |                |                      |          |                |                        |                            |                    |             |                     |             |             |          |


### 8.6. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND


#### HARMONICS AND SPURIOUS EMISSIONS

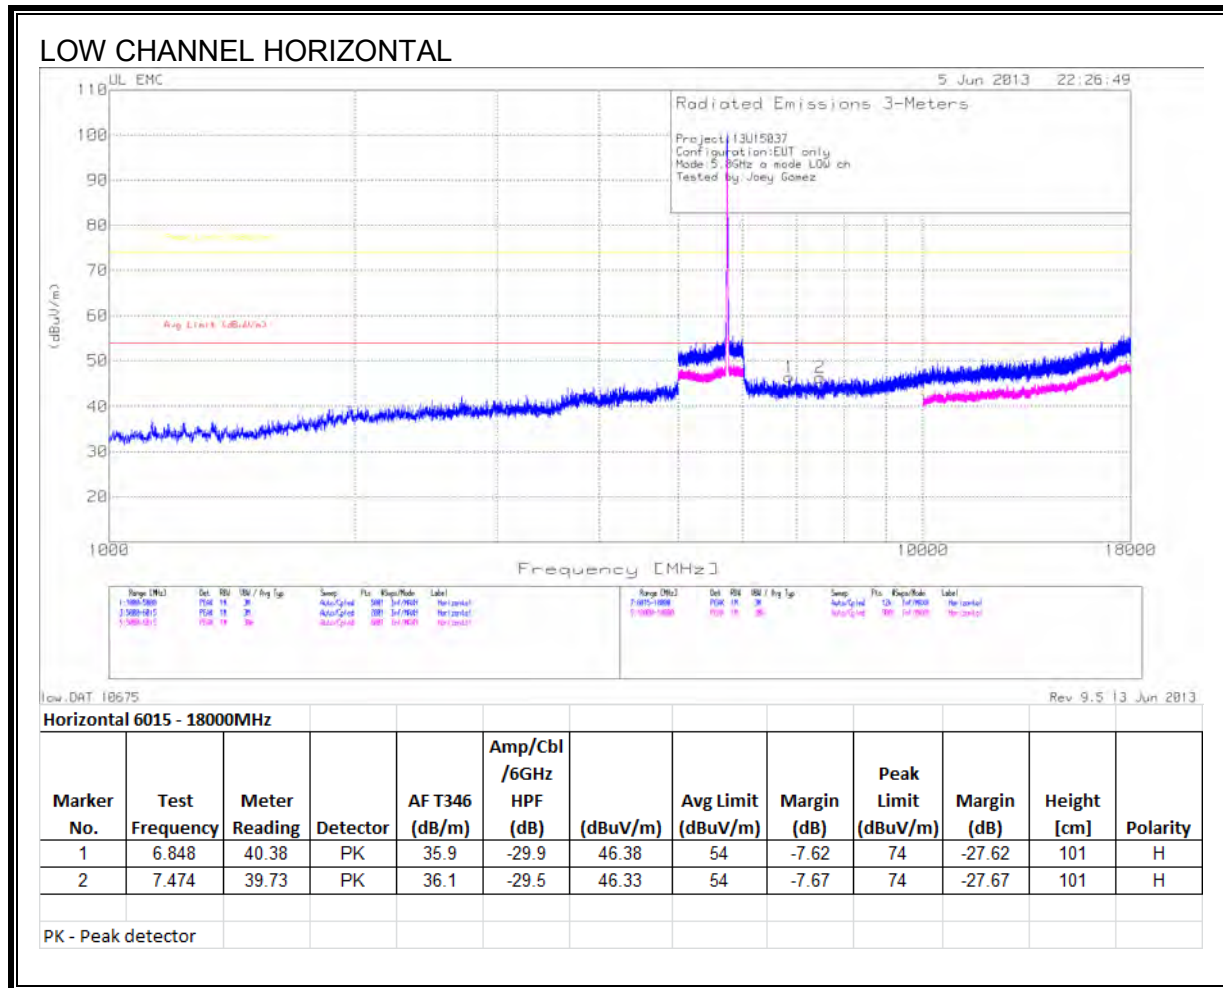


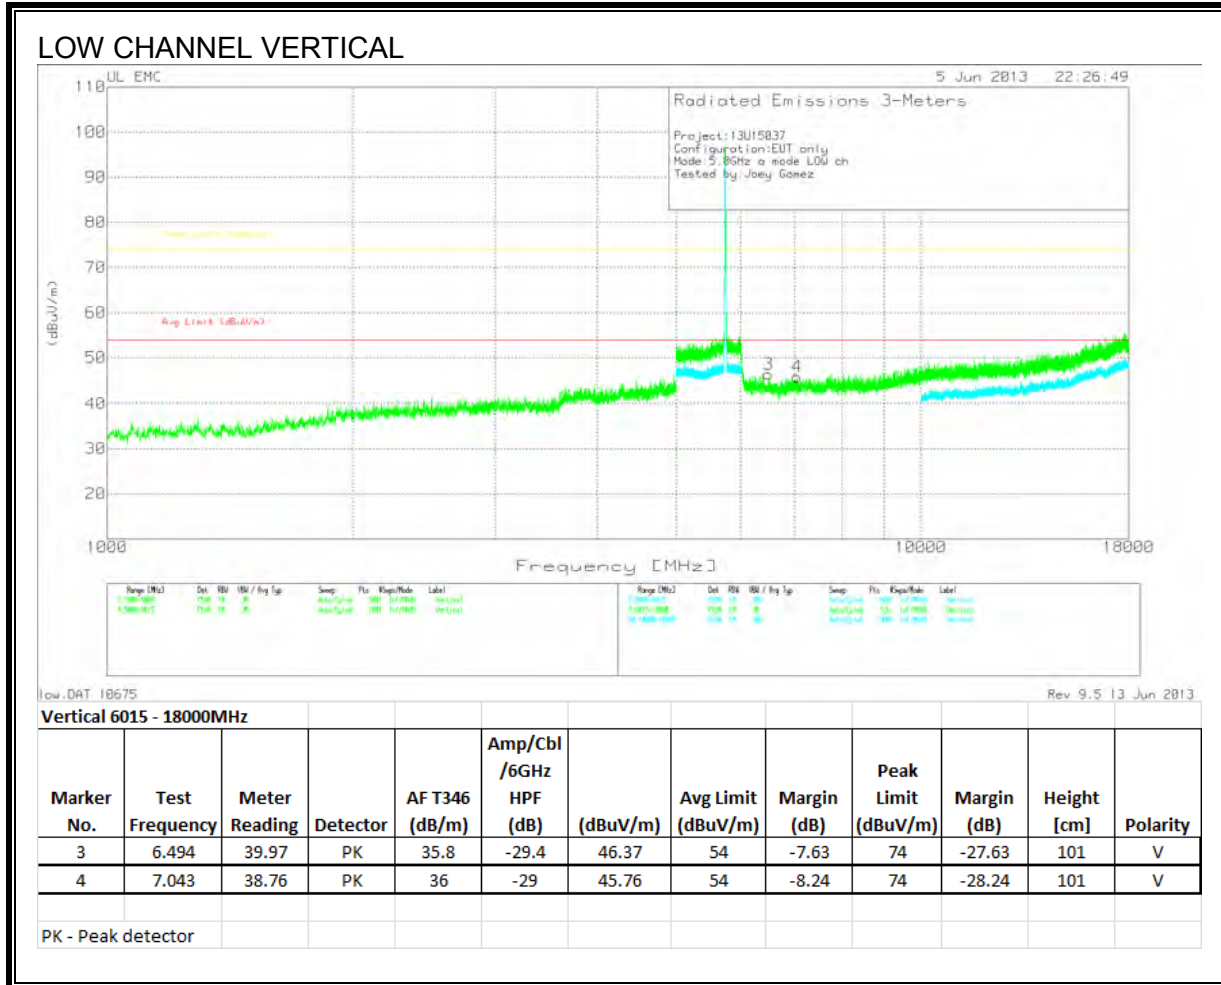




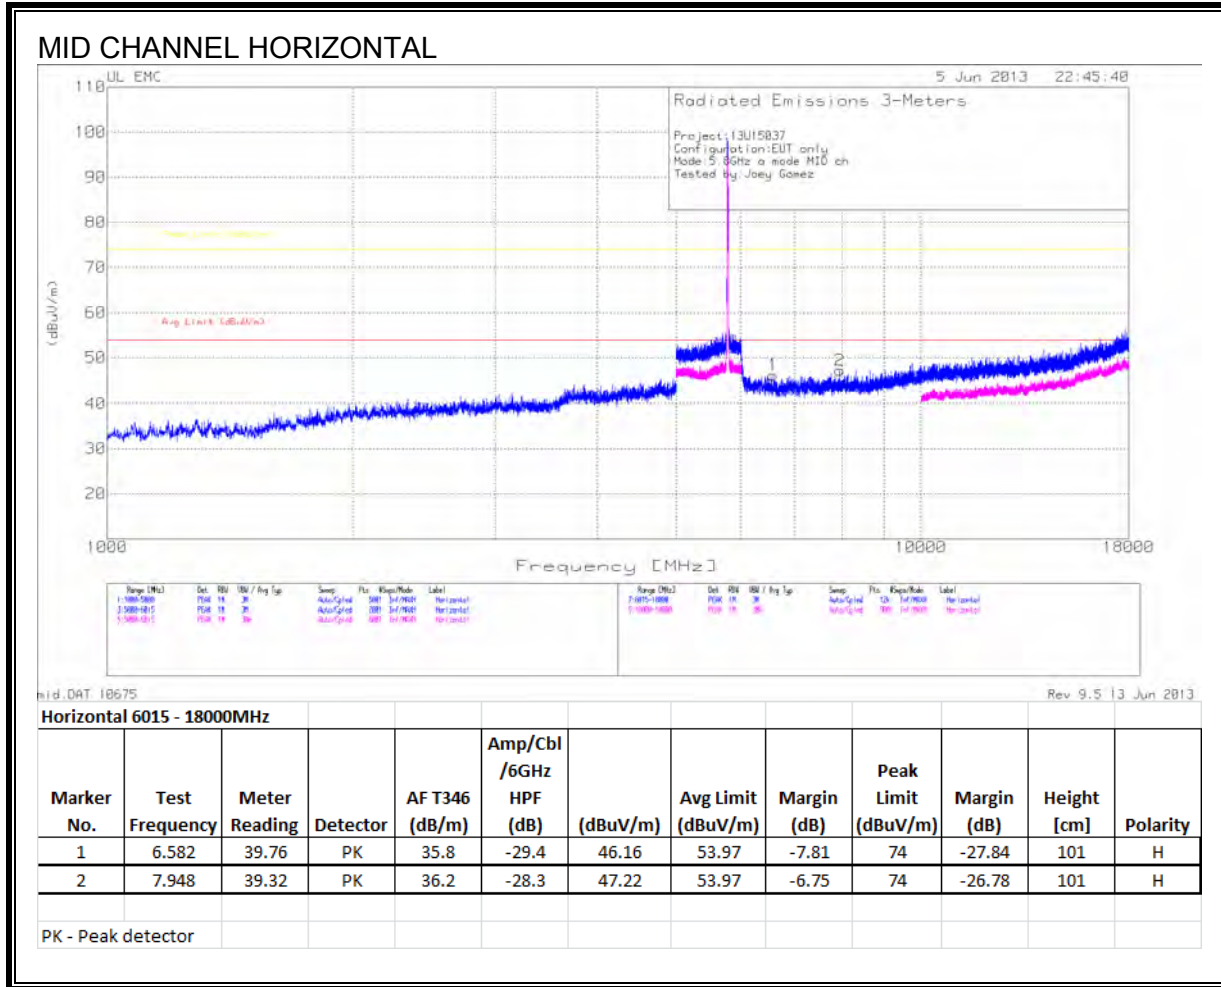

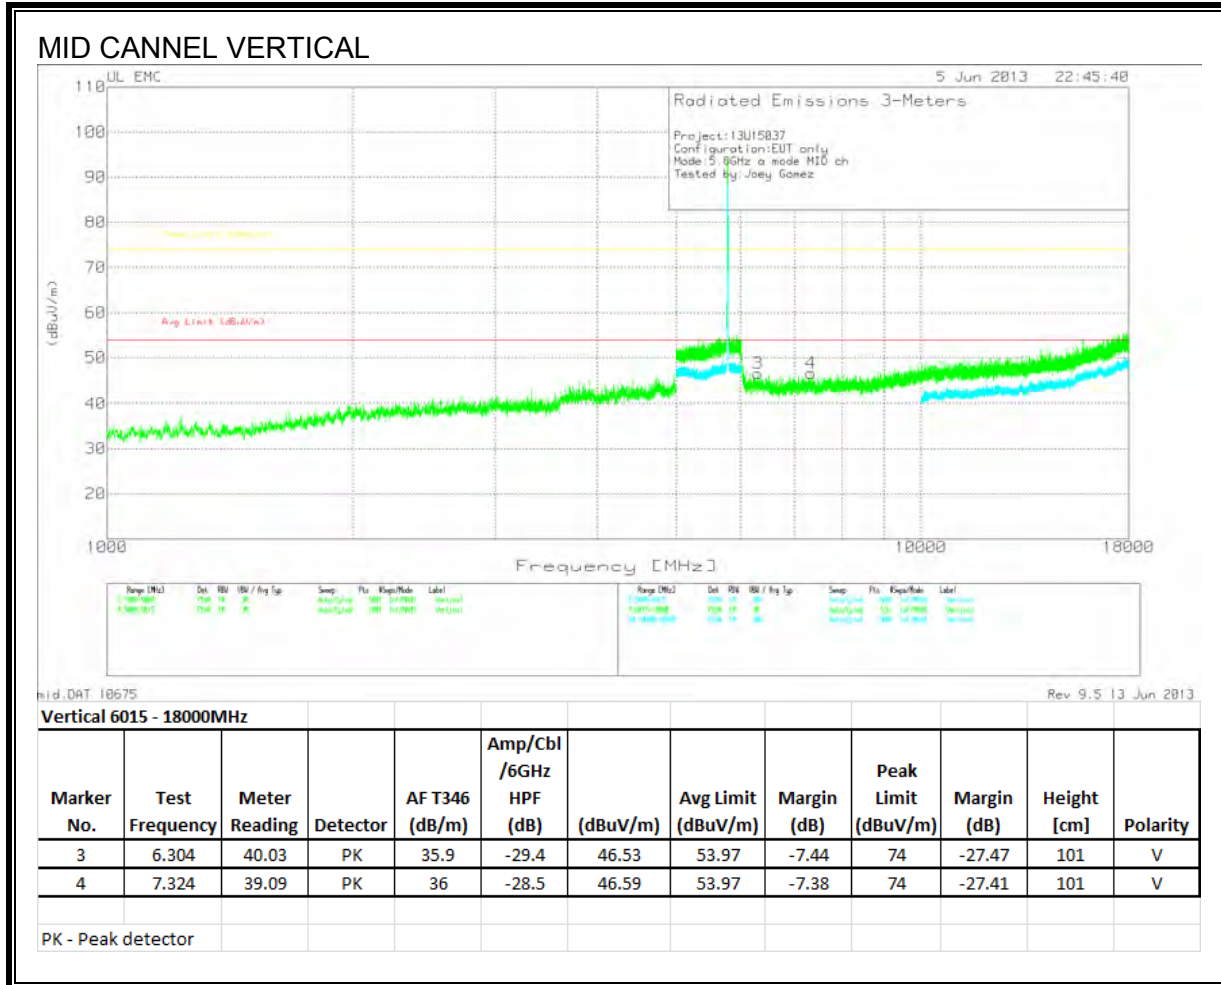


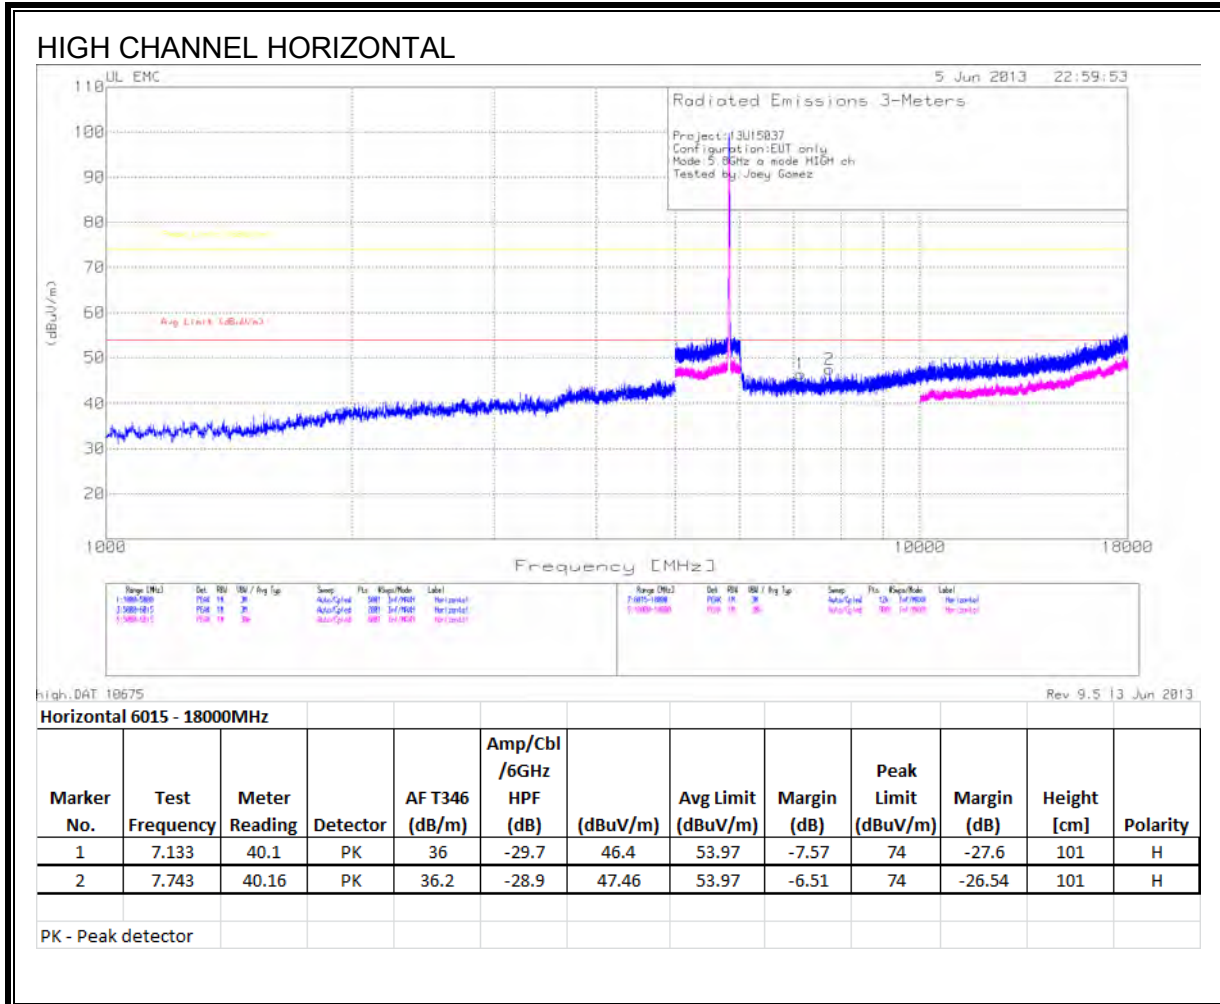


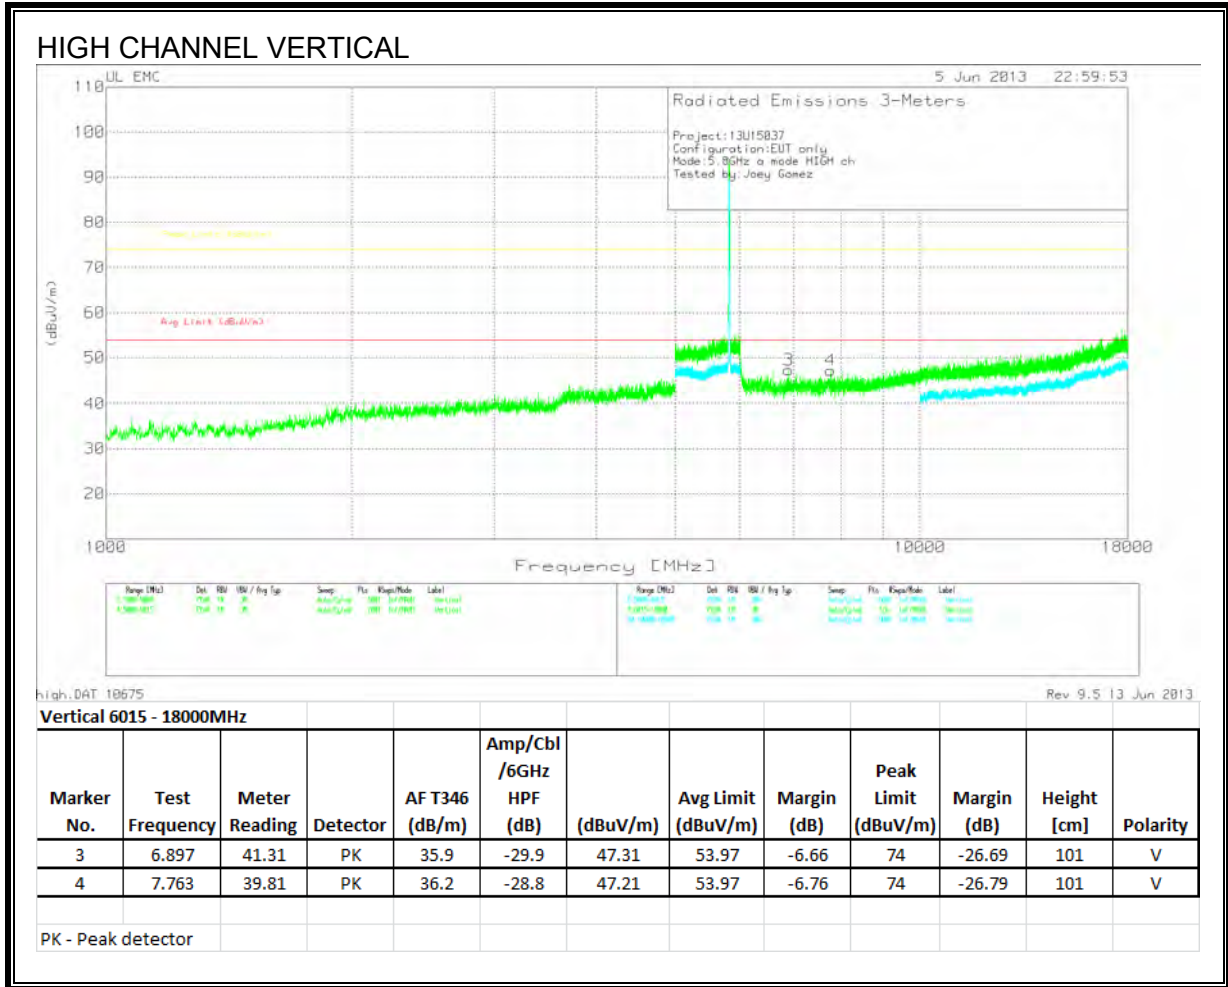



### 8.7. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

#### HARMONICS AND SPURIOUS EMISSIONS

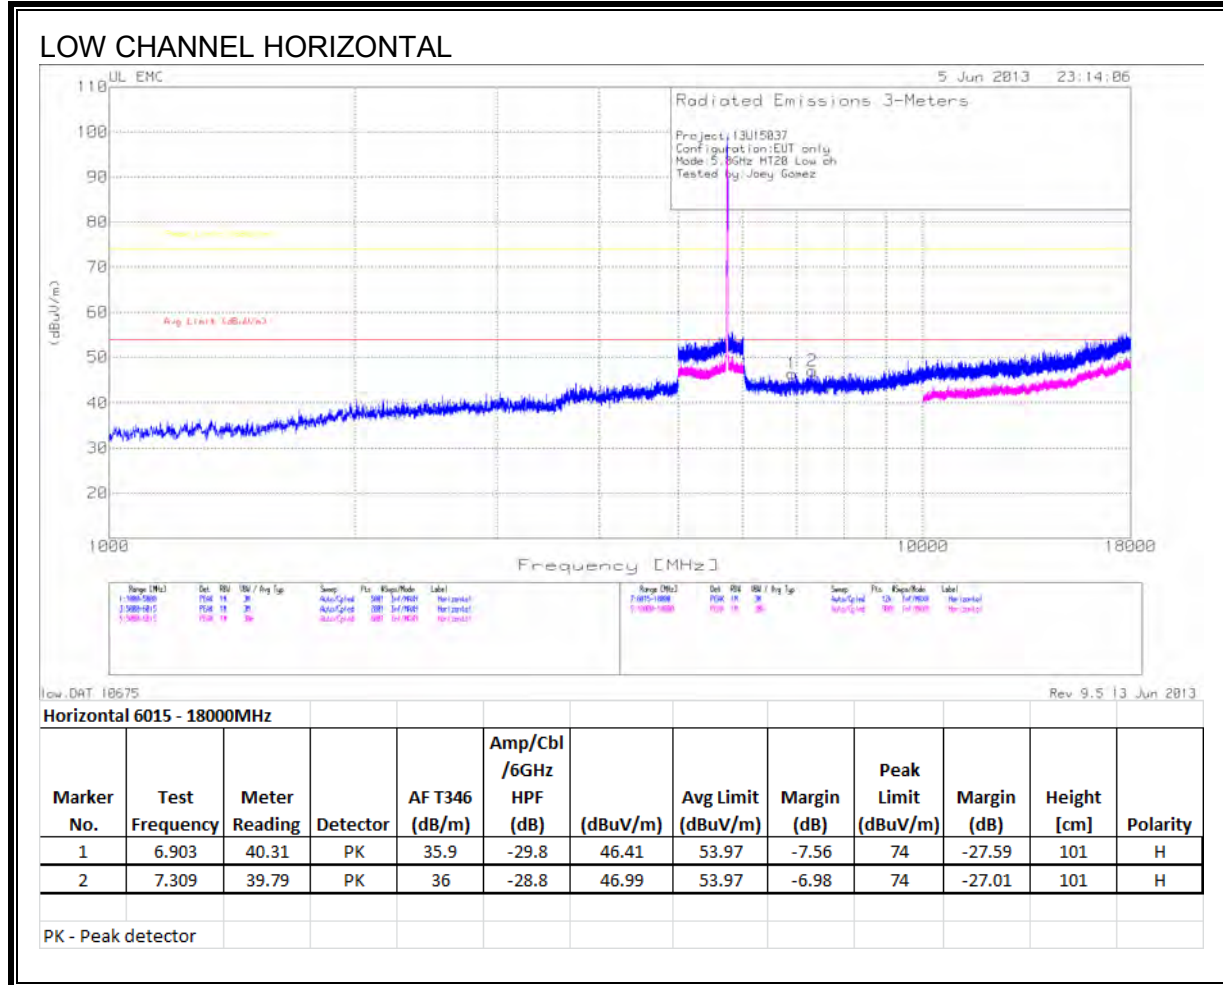

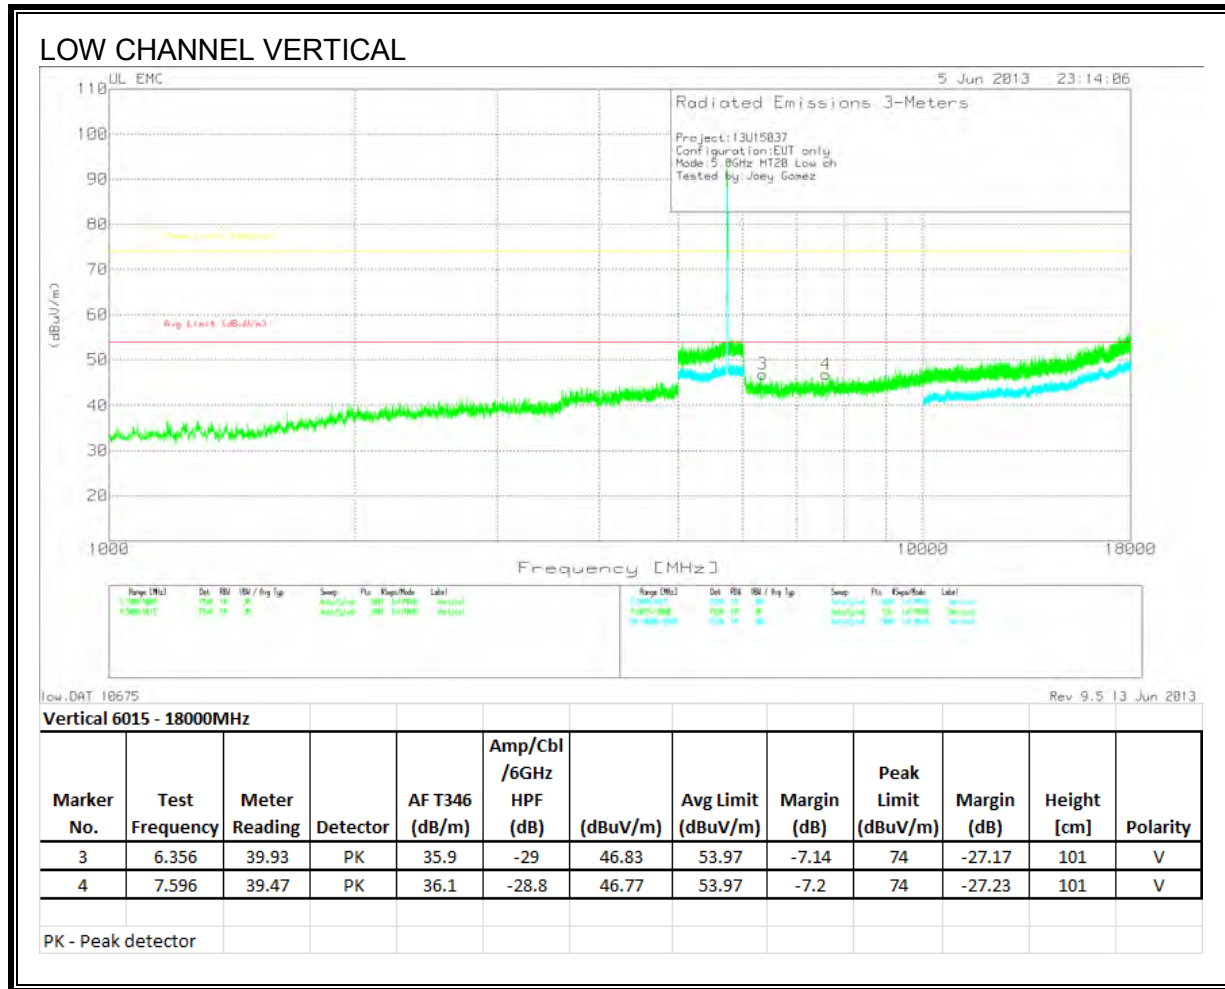


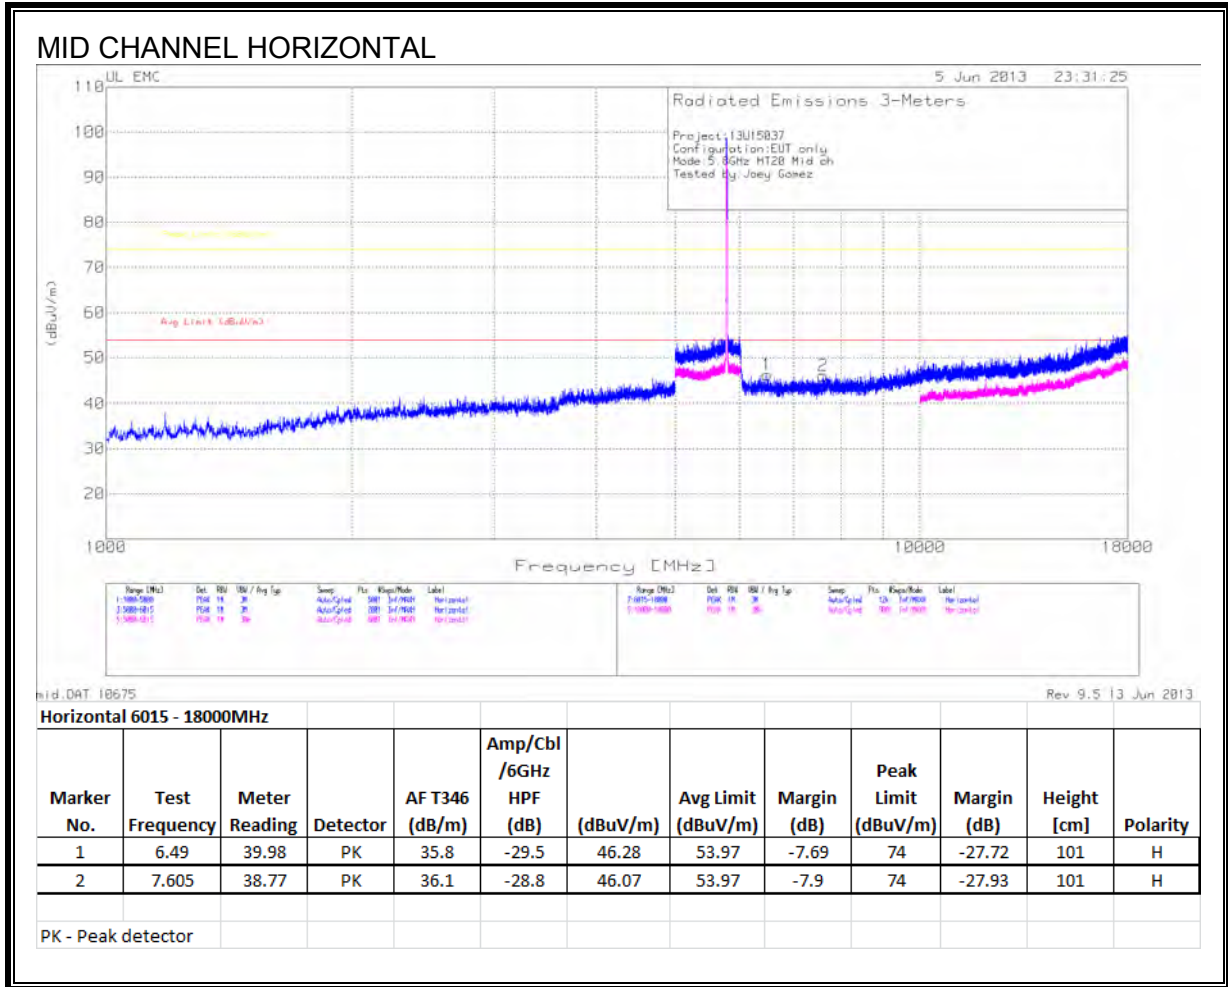

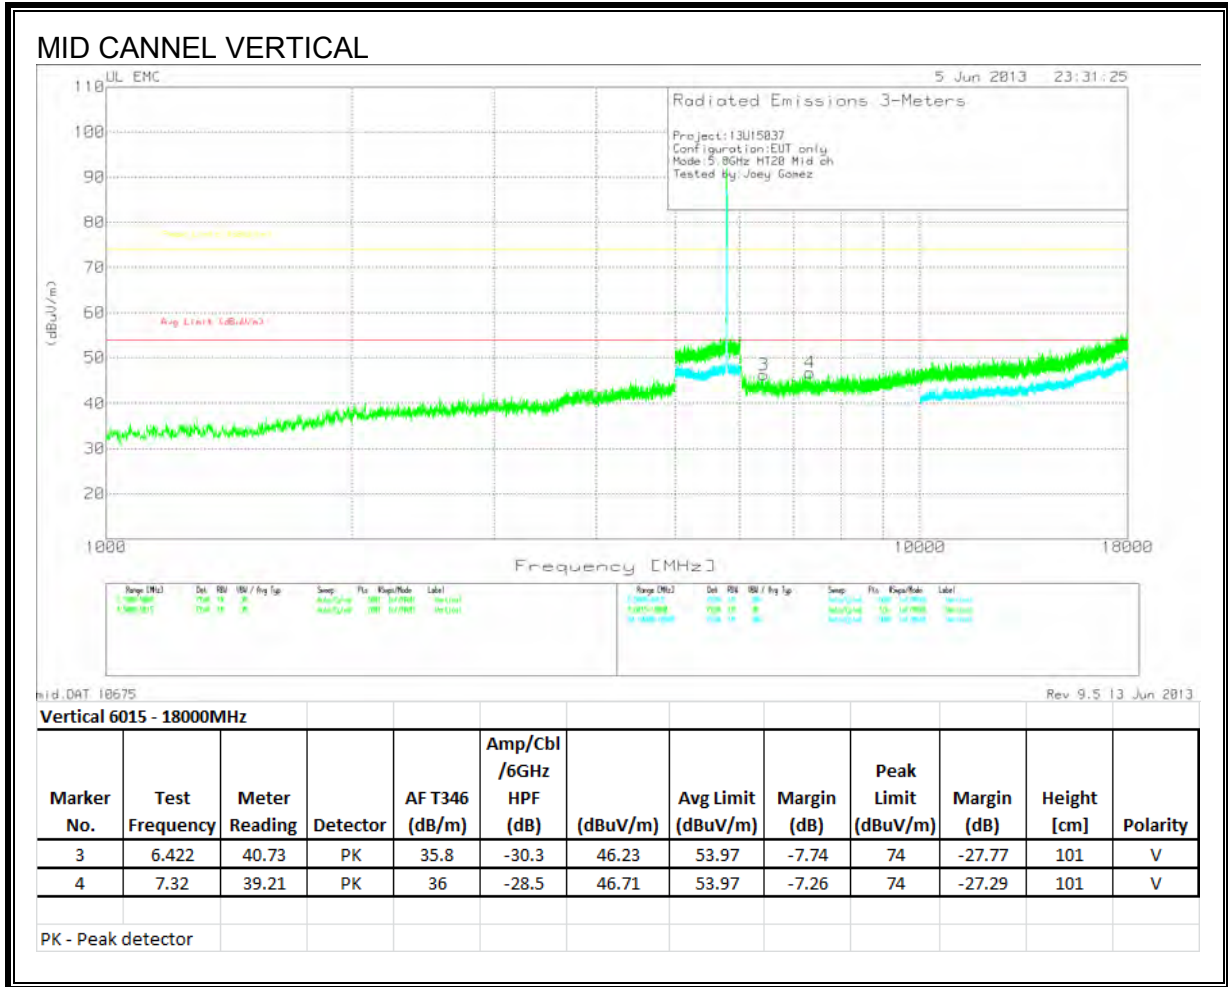



HIGH CHANNEL HORIZONTAL

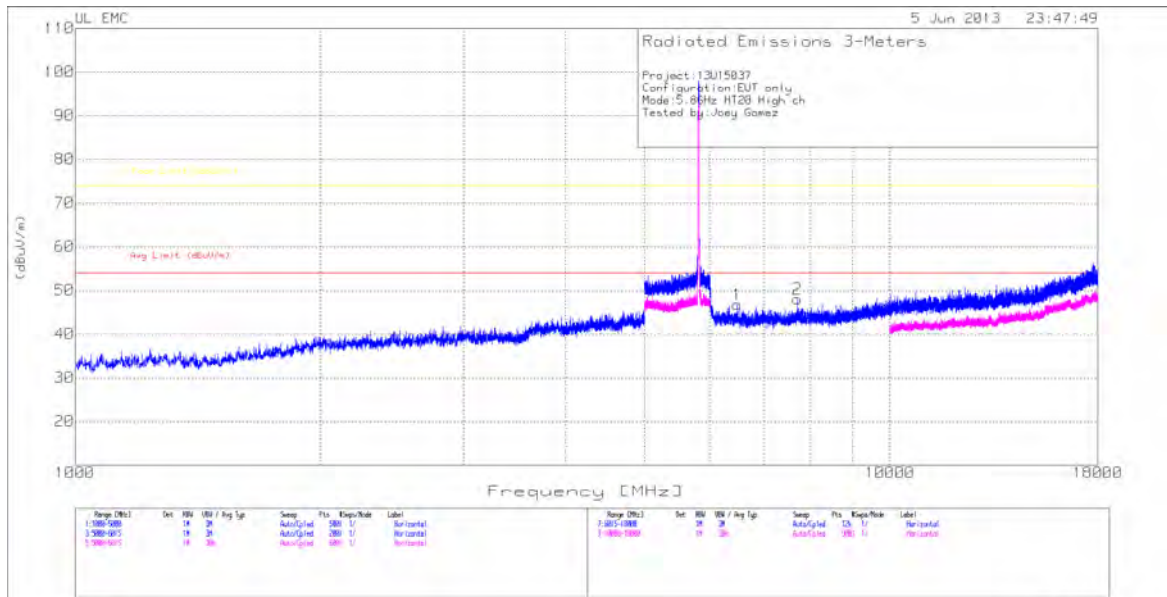


high\_DAT 10675

Rev 9.5 13 Jun 2013

Horizontal 6015 - 18000MHz

| Marker No.         | Test Frequency | Meter Reading | Detector | AFT346 (dB/m) | Amp/Cbl /6GHz HPF (dB) | (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
|--------------------|----------------|---------------|----------|---------------|------------------------|----------|--------------------|-------------|---------------------|-------------|-------------|----------|
| 1                  | 6.494          | 40.34         | PK       | 35.8          | -29.4                  | 46.74    | 53.97              | -7.23       | 74                  | -27.26      | 101         | H        |
| 2                  | 7.704          | 40.21         | PK       | 36.2          | -28.4                  | 48.01    | 53.97              | -5.96       | 74                  | -25.99      | 101         | H        |
| PK - Peak detector |                |               |          |               |                        |          |                    |             |                     |             |             |          |

HIGH CHANNEL VERTICAL

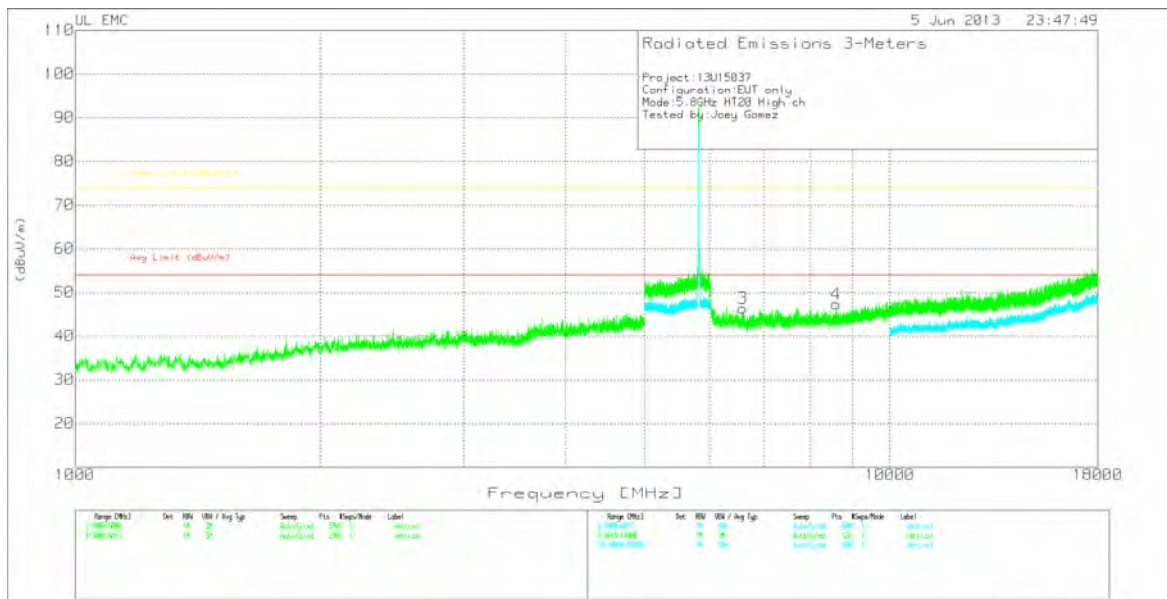

high\_DAT 10675


Rev 9.5 13 Jun 2013

Vertical 6015 - 18000MHz


| Marker No.         | Test Frequency | Meter Reading | Detector | AF T346 (dB/m) | Amp/Cbl /6GHz HPF (dB) | (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
|--------------------|----------------|---------------|----------|----------------|------------------------|----------|--------------------|-------------|---------------------|-------------|-------------|----------|
| 3                  | 6.595          | 39.86         | PK       | 35.8           | -29.3                  | 46.36    | 53.97              | -7.61       | 74                  | -27.64      | 101         | V        |
| 4                  | 8.595          | 38.43         | PK       | 36.4           | -27.5                  | 47.33    | 53.97              | -6.64       | 74                  | -26.67      | 101         | V        |
| PK - Peak detector |                |               |          |                |                        |          |                    |             |                     |             |             |          |

### 8.8. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND

#### HARMONICS AND SPURIOUS EMISSIONS

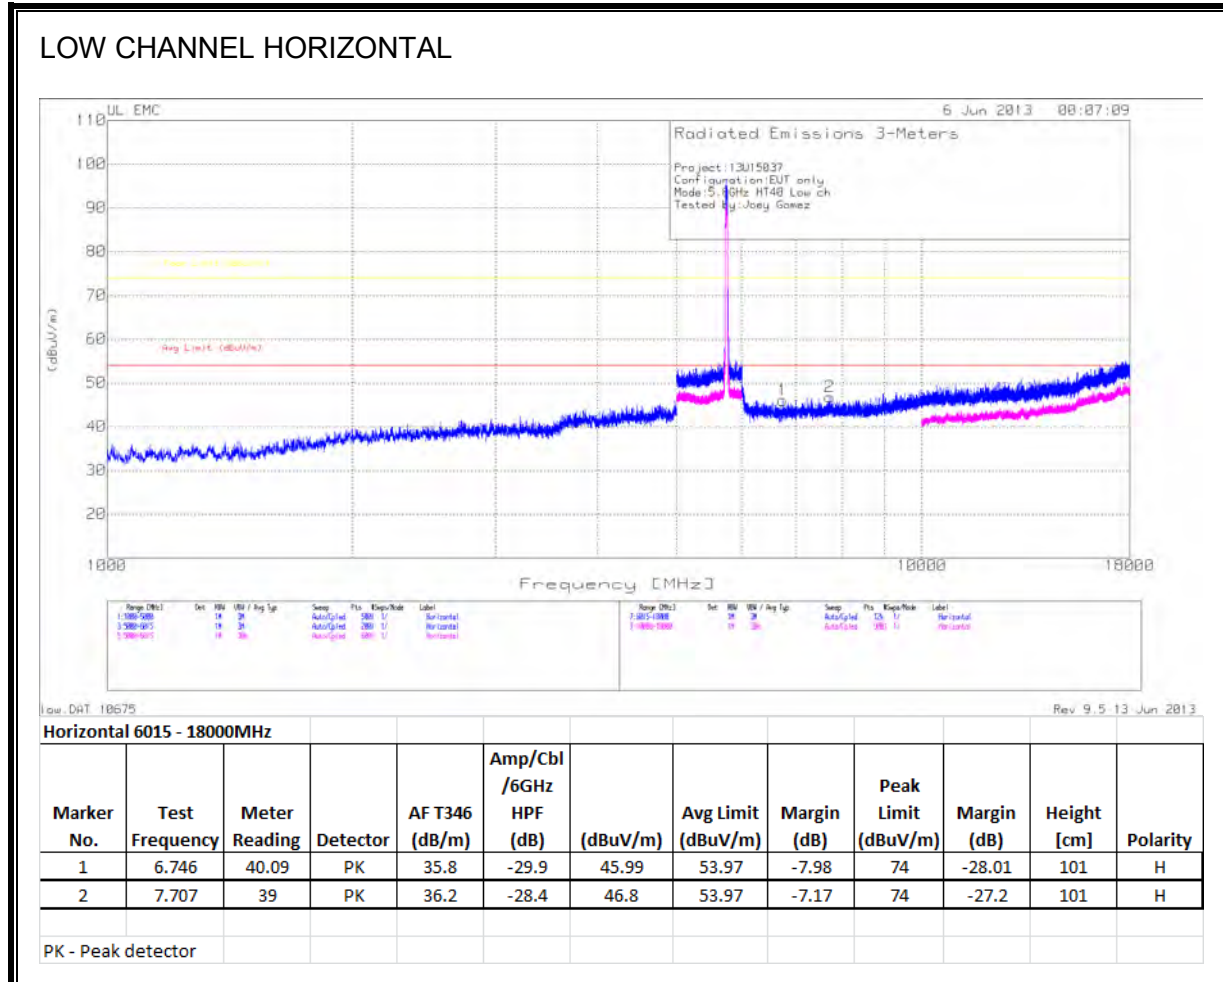

LOW CHANNEL VERTICAL

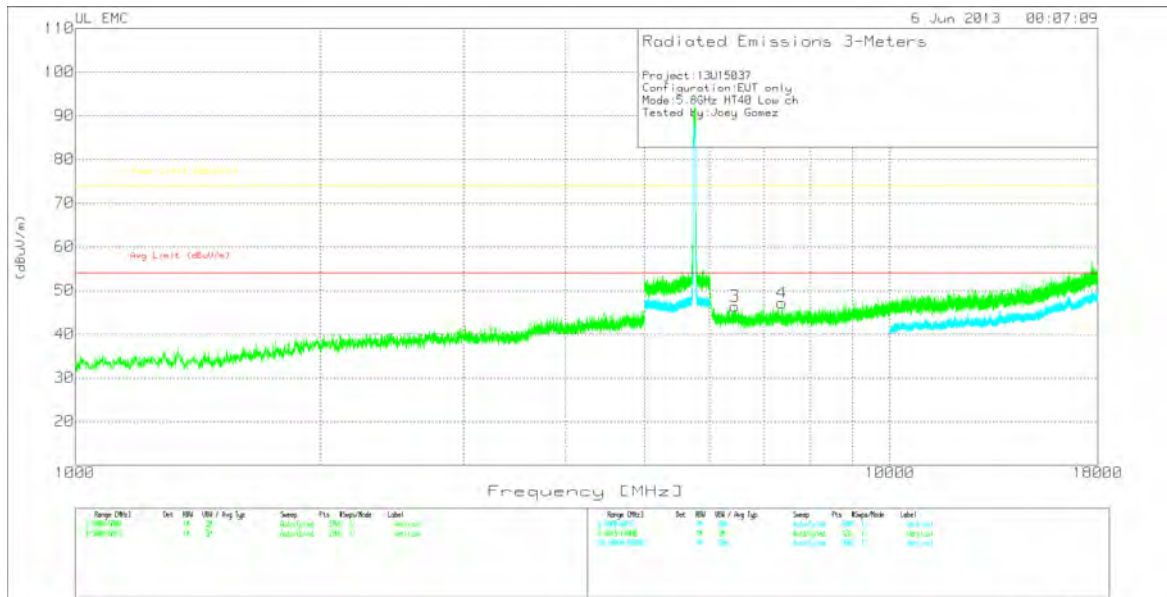


low\_Dat 18675

Rev 9.5 13 Jun 2013

Vertical 6015 - 18000MHz

| Marker No.         | Test Frequency | Meter Reading | Detector | AF T346 (dB/m) | Amp/Cbl /6GHz HPF (dB) | Avg Limit (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
|--------------------|----------------|---------------|----------|----------------|------------------------|--------------------|--------------------|-------------|---------------------|-------------|-------------|----------|
| 3                  | 6.455          | 40.77         | PK       | 35.8           | -30.2                  | 46.37              | 53.97              | -7.6        | 74                  | -27.63      | 101         | V        |
| 4                  | 7.37           | 39.79         | PK       | 36             | -28.7                  | 47.09              | 53.97              | -6.88       | 74                  | -26.91      | 101         | V        |
| PK - Peak detector |                |               |          |                |                        |                    |                    |             |                     |             |             |          |

HIGH CHANNEL HORIZONTAL

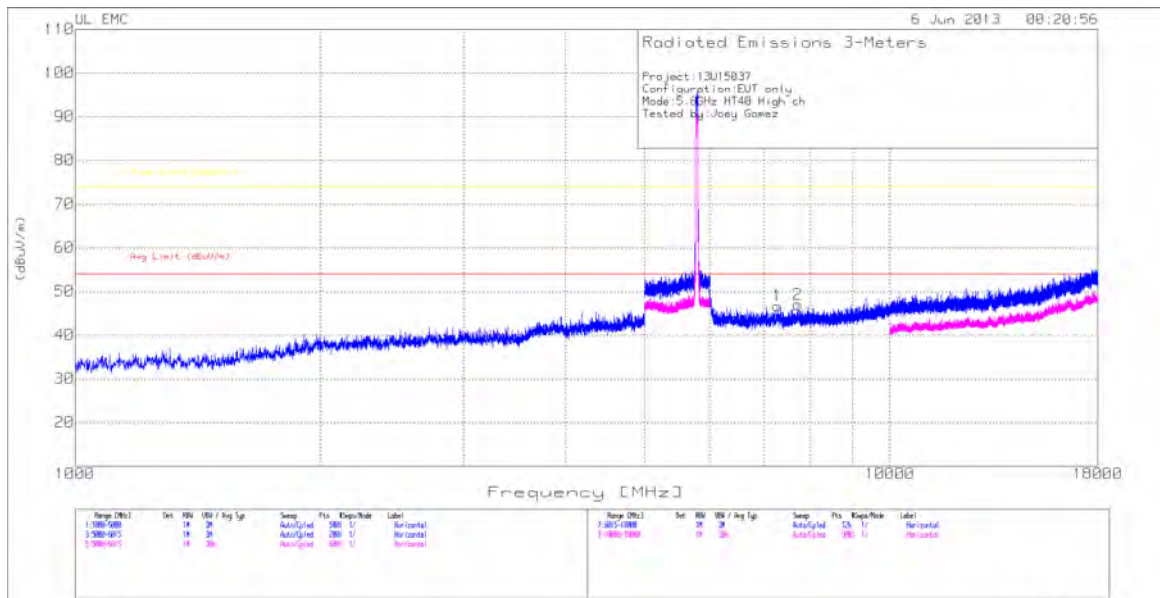

high.DAT 10675


Rev 9.5 13 Jun 2013

Horizontal 6015 - 18000MHz

| Marker No. | Test Frequency | Meter Reading | Detector | AF T346 (dB/m) | Amp/Cbl /6GHz HPF (dB) | (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
|------------|----------------|---------------|----------|----------------|------------------------|----------|--------------------|-------------|---------------------|-------------|-------------|----------|
| 1          | 7.28           | 39.46         | PK       | 36             | -28.8                  | 46.66    | 53.97              | -7.31       | 74                  | -27.34      | 101         | H        |
| 2          | 7.714          | 39.25         | PK       | 36.2           | -28.5                  | 46.95    | 53.97              | -7.02       | 74                  | -27.05      | 101         | H        |

PK - Peak detector

HIGH CHANNEL VERTICAL

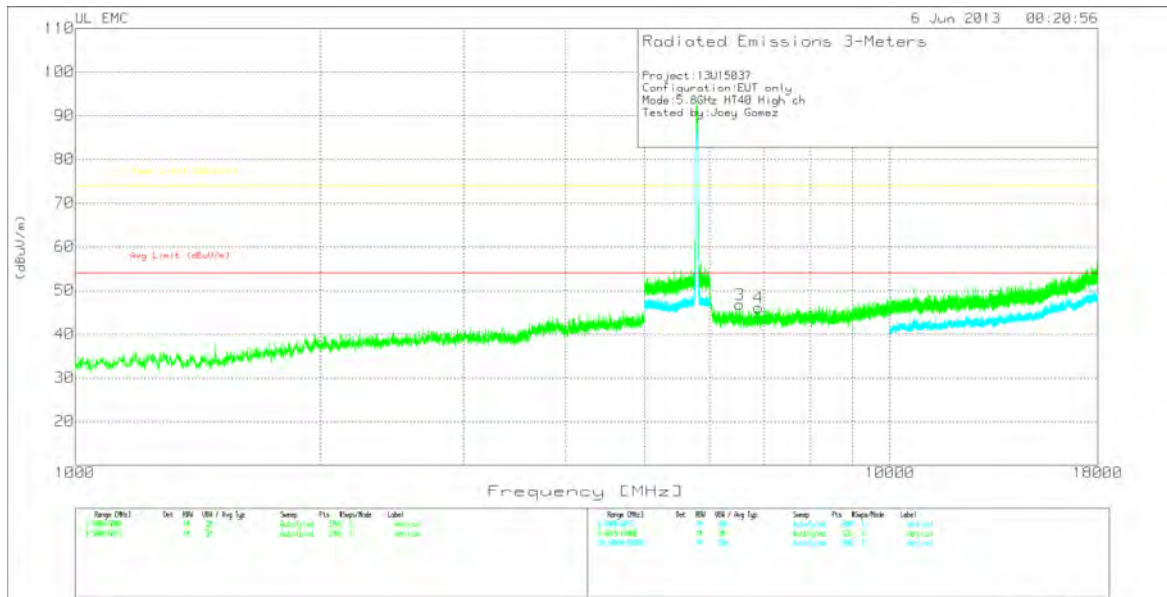

high\_DAT 10675

Rev 9.5 13 Jun 2013


Vertical 6015 - 18000MHz

| Marker No. | Test Frequency | Meter Reading | Detector | AF T346 (dB/m) | Amp/Cbl /6GHz HPF (dB) | Avg Limit (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Height [cm] | Polarity |
|------------|----------------|---------------|----------|----------------|------------------------|--------------------|--------------------|-------------|---------------------|-------------|-------------|----------|
| 3          | 6.542          | 40.12         | PK       | 35.8           | -29.2                  | 46.72              | 53.97              | -7.25       | 74                  | -27.28      | 101         | V        |
| 4          | 6.896          | 40.02         | PK       | 35.9           | -29.9                  | 46.02              | 53.97              | -7.95       | 74                  | -27.98      | 101         | V        |


PK - Peak detector

### 8.9. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

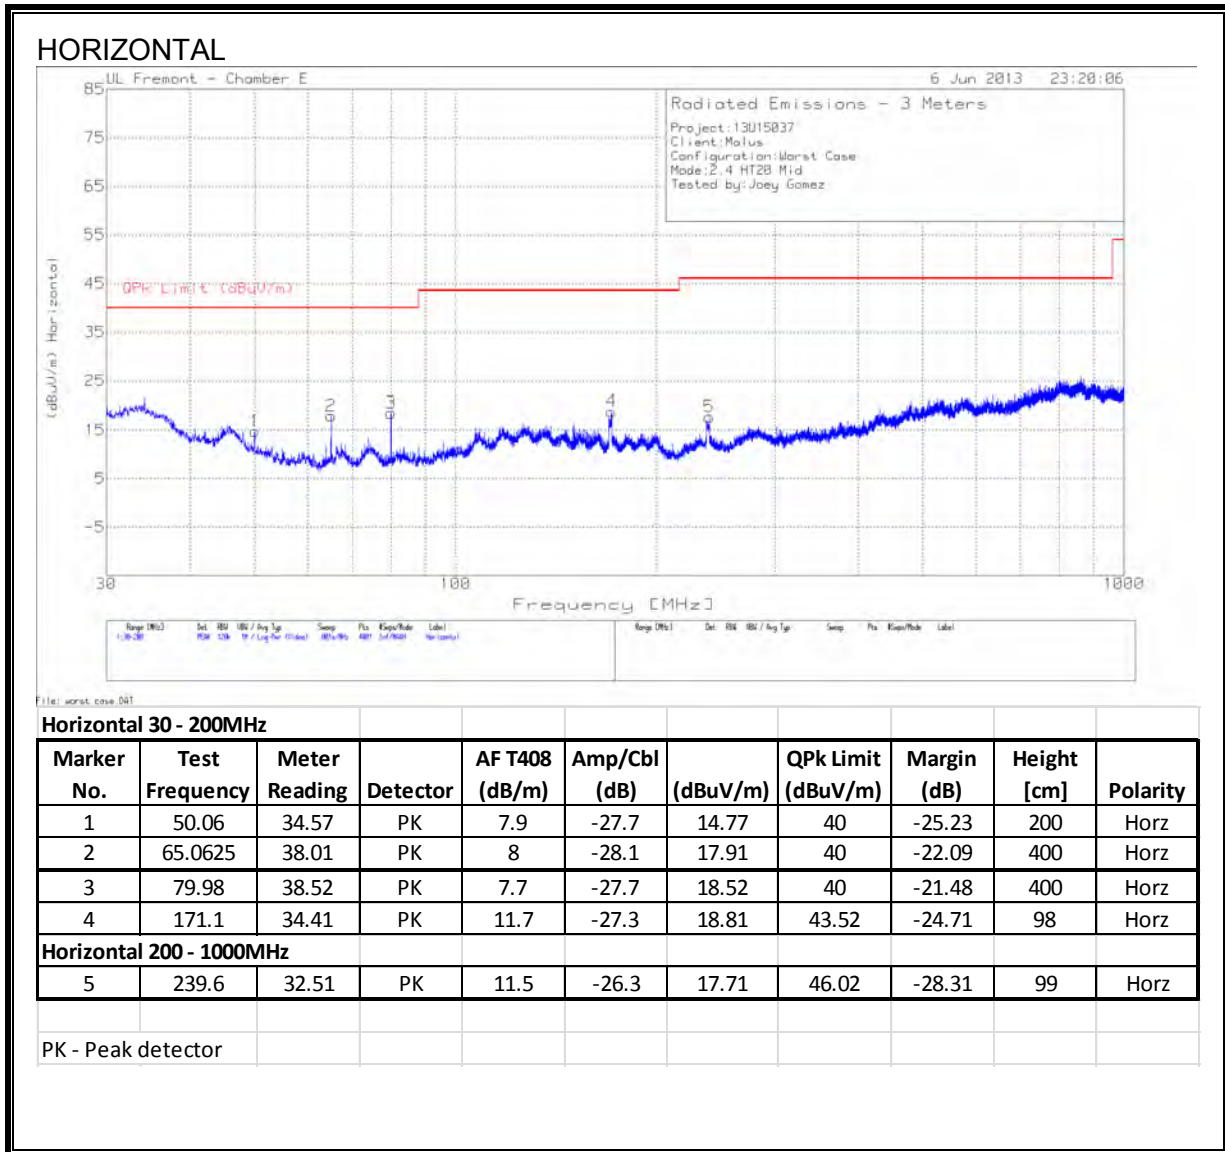

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

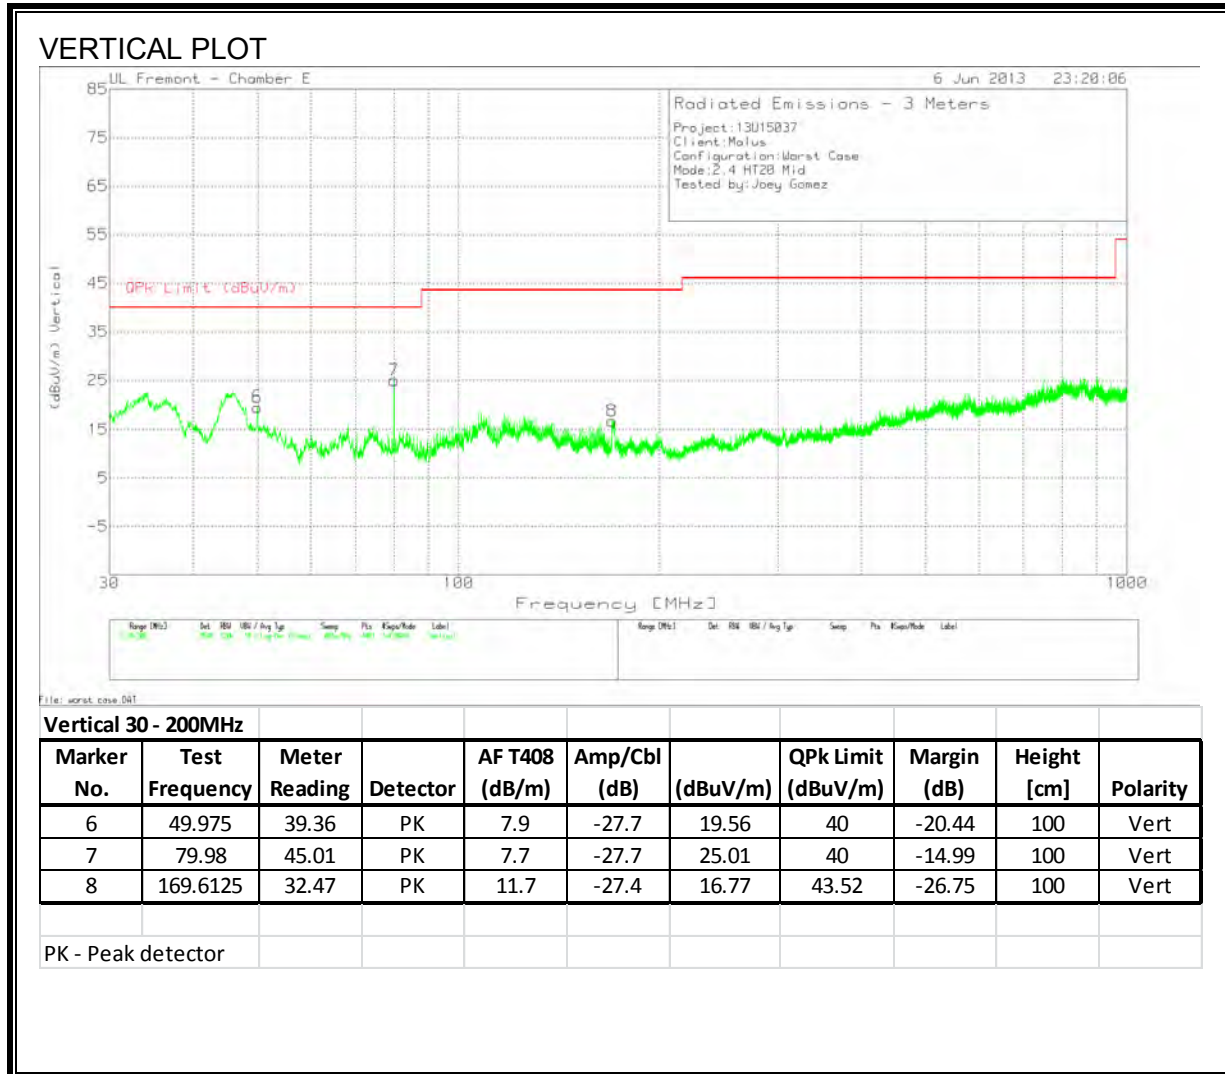



## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |          |
|-----------------------------|------------------------|----------|
|                             | Quasi-peak             | Average  |
| 0.15-0.5                    | 66 to 56               | 56 to 46 |
| 0.5-5                       | 56                     | 46       |
| 5-30                        | 60                     | 50       |

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

**RESULTS**

**6 WORST EMISSIONS**

**Line-L1 .15 - 30MHz**


| Test Frequency | Meter Reading | Detector | T24 IL L1.TXT (dB) | LC Cables 1&3.TXT (dB) | dB(uVolts) | CISPR 11/22 Class B Quasi-peak | Margin | CISPR 11/22 Class B Average | Margin |
|----------------|---------------|----------|--------------------|------------------------|------------|--------------------------------|--------|-----------------------------|--------|
| 0.159          | 54.38         | QP       | 0.1                | 0                      | 54.48      | 65.52                          | -11.04 | -                           | -      |
| 0.159          | 48.7          | Av       | 0.1                | 0                      | 48.8       | -                              | -      | 55.5                        | -6.7   |
| 0.8295         | 48.8          | PK       | 0.1                | 0                      | 48.9       | 56                             | -7.1   | -                           | -      |
| 0.8295         | 30.76         | Av       | 0.1                | 0                      | 30.86      | -                              | -      | 46                          | -15.14 |
| 7.278          | 39.71         | PK       | 0.1                | 0.1                    | 39.91      | 60                             | -20.09 | -                           | -      |
| 7.278          | 25.72         | Av       | 0.1                | 0.1                    | 25.92      | -                              | -      | 50                          | -24.08 |
| 16.854         | 45.42         | PK       | 0.2                | 0.2                    | 45.82      | 60                             | -14.18 | -                           | -      |
| 16.854         | 28.85         | Av       | 0.2                | 0.2                    | 29.25      | -                              | -      | 50                          | -20.75 |

**Line-L2 .15 - 30MHz**

| Test Frequency | Meter Reading | Detector | T24 IL L2.TXT (dB) | LC Cables 2&3.TXT (dB) | dB(uVolts) | CISPR 11/22 Class B Quasi-peak | Margin | CISPR 11/22 Class B Average | Margin |
|----------------|---------------|----------|--------------------|------------------------|------------|--------------------------------|--------|-----------------------------|--------|
| 0.1545         | 54.75         | PK       | 0.1                | 0                      | 54.85      | 65.8                           | -10.95 | -                           | -      |
| 0.1545         | 40.25         | Av       | 0.1                | 0                      | 40.35      | -                              | -      | 55.8                        | -15.45 |
| 0.78           | 42.3          | PK       | 0.1                | 0                      | 42.4       | 56                             | -13.6  | -                           | -      |
| 0.78           | 24.89         | Av       | 0.1                | 0                      | 24.99      | -                              | -      | 46                          | -21.01 |
| 2.4585         | 35.55         | PK       | 0.1                | 0.1                    | 35.75      | 56                             | -20.25 | -                           | -      |
| 2.4585         | 22.07         | Av       | 0.1                | 0.1                    | 22.27      | -                              | -      | 46                          | -23.73 |
| 17.5425        | 42            | PK       | 0.2                | 0.2                    | 42.4       | 60                             | -17.6  | -                           | -      |
| 17.5425        | 29.72         | Av       | 0.2                | 0.2                    | 30.12      | -                              | -      | 50                          | -19.88 |

PK - Peak detector  
 QP - Quasi-Peak detector  
 Av - Average detector

**LINE 1 RESULTS**

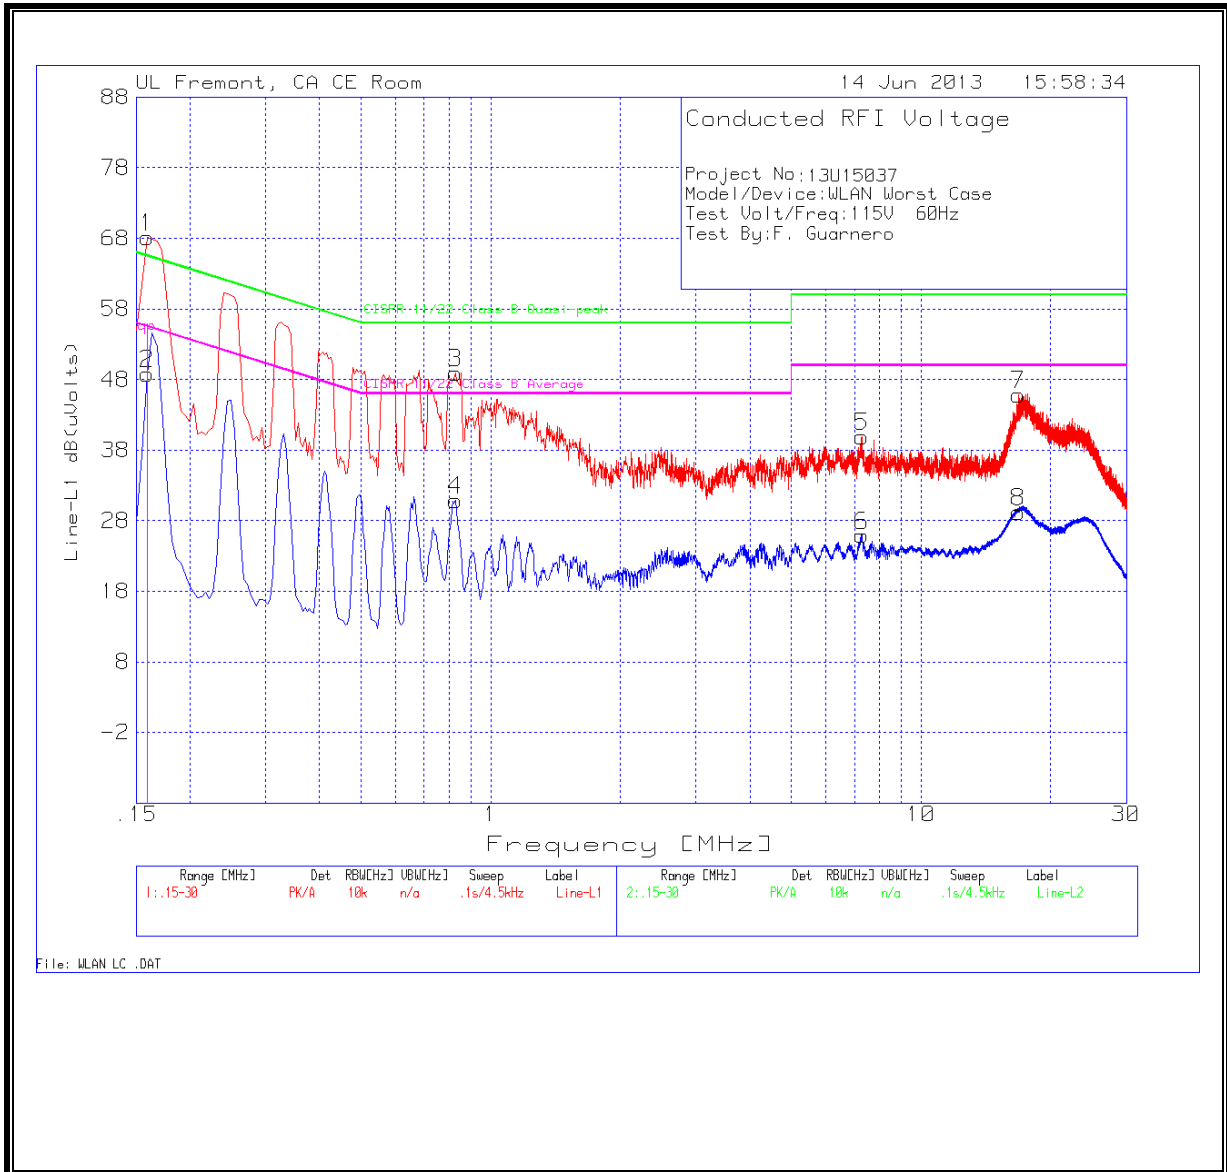

**LINE 2 RESULTS**

