



FCC 47 CFR PART 22H, 24E, 27L AND 90S
CERTIFICATION TEST REPORT

FOR

CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL NUMBER: A1549

FCC ID: BCG-E2816A

REPORT NUMBER: 14U17673-E15, REVISION A

ISSUE DATE: AUGUST 02, 2014

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP®

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
	07/29/14	Initial Issue	C. Pang
A	08/02/14	Address TCB's Questions	C. Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	7
4.2. <i>SAMPLE CALCULATION</i>	7
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	7
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	8
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	8
5.2.1. LAT.....	8
5.2.2. UAT	10
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	13
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	13
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	13
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	14
6. TEST AND MEASUREMENT EQUIPMENT	16
7. RF POWER OUTPUT VERIFICATION	17
7.1. <i>GPRS/EGPRS MODE</i>	19
7.2. <i>UMTS REL99.....</i>	20
7.2.1. LAT.....	21
7.2.2. UAT	22
7.3. <i>HSDPA REL 5</i>	23
7.3.1. LAT.....	24
7.3.2. UAT	26
7.4. <i>HSPA REL 6 (HSDPA & HSUPA).....</i>	28
7.4.1. LAT.....	29
7.4.2. UAT	30
7.5. <i>DUAL CARRIER HSDPA.....</i>	32
7.5.1. LAT.....	34
7.5.2. UAT	36
7.6. <i>CDMA2000 1xRTT.....</i>	38
7.6.1. LAT.....	39
7.6.2. UAT	43
7.7. <i>CDMA2000 1xEV-DO - Release 0 (Rel. 0).....</i>	47
7.7.1. LAT.....	48
7.7.2. UAT	49

7.8. CDMA2000 1xEV-DO - Revision A (Rev. A)	50
7.8.1. LAT	51
7.8.2. UAT	52
7.9. CDMA2000 1xEV-DO - Revision B (Rev. B)	53
7.9.1. LAT	54
7.9.2. UAT	55
8. CONDUCTED TEST RESULTS	56
8.1. OCCUPIED BANDWIDTH	56
8.1.1. GSM-GPRS	60
8.1.2. GSM-EGPRS	63
8.1.3. UMTS Rel. 99	66
8.1.4. UMTS HSDPA	71
8.1.5. CDMA2000 1xRTT	76
8.1.6. CDMA2000 EVDO Rev. A	82
8.1.7. CDMA2000 EVDO Rev. B	88
8.2. BAND EDGE	93
8.2.1. GSM-GPRS	95
8.2.2. GSM-EGPRS	97
8.2.3. UMTS Rel. 99	99
8.2.4. UMTS HSDPA	102
8.2.5. CDMA2000 1xRTT	105
8.2.6. CDMA2000 1xRTT BC10 MASK	109
8.2.7. CDMA2000 EVDO Rev. A	111
8.2.8. CDMA2000 REVA BC10 MASK	115
8.3. OUT OF BAND EMISSIONS	117
8.3.1. GSM-GPRS	118
8.3.2. GSM-EGPRS	121
8.3.3. UMTS Rel. 99	124
8.3.4. UMTS HSDPA	129
8.3.5. CDMA2000 1xRTT	134
8.3.6. CDMA2000 EVDO Rev. A	140
9. FREQUENCY STABILITY	146
9.1. GSM	147
9.2. WCDMA	149
9.3. CDMA2000	151
10. RADIATED TEST RESULTS	153
10.1. RADIATED POWER (ERP & EIRP)	153
10.1.1. LAT	155
10.1.2. UAT	157
10.1.3. LAT	161
10.1.4. UAT	182
10.2. PEAK-TO-AVERAGE RATIO	203
10.3. FIELD STRENGTH OF SPURIOUS RADIATION	216
10.3.1. LAT	218
10.3.2. UAT	236

11. SETUP PHOTOS254

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL: A1549

SERIAL NUMBER: 920-3961-04(Conducted), C39MR001G32J (Radiated)

DATE TESTED: APRIL 25 –AUGUST 02, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, 27L and 90S	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Chin Pang
Senior Engineer
UL Verification Services Inc.

Tested By:

Tony Wang
Lab Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, and Part 90.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input checked="" type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input checked="" type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input checked="" type="checkbox"/> Chamber F
	<input type="checkbox"/> Chamber G
	<input type="checkbox"/> Chamber H

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	$\pm 3.52 \text{ dB}$
Radiated Disturbance, 30 to 1000 MHz	$\pm 4.94 \text{ dB}$

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a mobile phone with multimedia functions (music, application support, and video), Cellular GSM/GPRS/EGPRS/CDMA2000 1xRTT/EVDO Rev A/ EVDO Rev.B/WCDMA/HSPA+/DC-HSDPA/LTE FDD & Carrier Aggregation radio, IEEE 802.11a/b/g/n/ac radio, Bluetooth radio and NFC. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak or average conducted and ERP / EIRP output powers as follows:

5.2.1. LAT

GSM MODES

Part 22 850MHz Band						
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)		EIRP (Average)
		dBm	mW	dBm	mW	dBm
824 - 849	GRPS	33.40	2187.8	28.0	635.3	30.18
	EGPRS	29.00	794.3	24.2	263.0	26.35
						431.5

Part 24 1900MHz Band						
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)		EIRP (Average)
		dBm	mW	dBm	mW	dBm
1850 - 1910	GRPS	29.60	912.0	32.33	1710.0	
	EGPRS	27.95	623.7	30.57	1140.2	

WCDMA MODES

Part 22 850MHz Band						
Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)		EIRP (Average)
		dBm	mW	dBm	mW	dBm
824 – 849	REL 99	24.90	309.0	20.3	107.9	22.48
	HSDPA	24.00	251.2	19.4	87.7	21.58
						143.9

Part 22 850MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)		EIRP (Average)	
		dBm	mW	dBm	mW	dBm	mW
2 CARRIER MIN	CDMA EVDO B	21.40	138.0	14.35	27.2	16.50	44.7
2 CARRIER MAX	CDMA EVDO B	21.02	126.5	14.00	25.1	16.15	41.2
3 CARRIER MIN	CDMAEVDO B	21.00	125.9	13.95	24.8	16.10	40.7

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a band gap type integral antenna for the following bands with a maximum peak gain as follow: LAT: Port A, UAT: Port B.

Frequency (MHz)	Gain (dBi) LAT	Gain (dBi) UAT
BC10 , 817 - 824	-2.70	-5.17
Cell , 824 - 849	-2.32	-5.64
PCS , 1850 - 1910	2.90	-1.29
AWS , 1710 - 1754	1.22	-1.18

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was version 12A310 Baseband 0.26.01. The EUT is linked with Agilent 8960, Anritsu MT8820C, and CMW500 Communication Test Sets..

5.5. WORST-CASE CONFIGURATION AND MODE

Based on the investigation results, the highest peak power and enhanced data rate is the worst-case scenario for all measurements.

For the device, all tests were performed as below,

_Port A: Both conducted and radiated emissions measurement with all bands.

_Port B: All conducted emissions measurement and only ERP/EIRP radiated emissions on all bands.

X-position is the worst-case for all modes below:

- For Cellular and PCS band: 1xRTT (SO55)
- For Cellular and PCS band: CDMA2000 1xEV-DO Rev. A.
- For Cellular and PCS band: GPRS and EGPRS
- For Cellular and PCS band: UMTS, REL 99 and HSDPA

For the fundamental investigation, since the EUT is a portable device that has three orientations; an X, Y and Z orientations and the worst among X, Y, and Z with AC/DC adapter and headset have been investigated. The worst case was found to be a X-position (flatbed) without AC/DC adapter and headset for all cell and pcs bands

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC Adapter	Dell	Latitude 3540	NA
DC Power Supply	Dell	H65NM130	426-03P6-A00
EUT AC Adapter	Apple	A1385	D292365COYADHLHC3

I/O CABLES (RF Conducted Test)


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	N/A
2	DC	1	DC	Un-shielded	2m	N/A
3	RF In/Out	1	EUT	Un-shielded	1m	N/A
4	RF In/Out	1	Spectrum Analyze	Un-shielded	1m	N/A
5	RF In/Out	1	munication Test	Un-shielded	None	N/A

I/O CABLES (RF Radiated Test)


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5m	NA

TEST SETUP

CONDUCTED SETUP

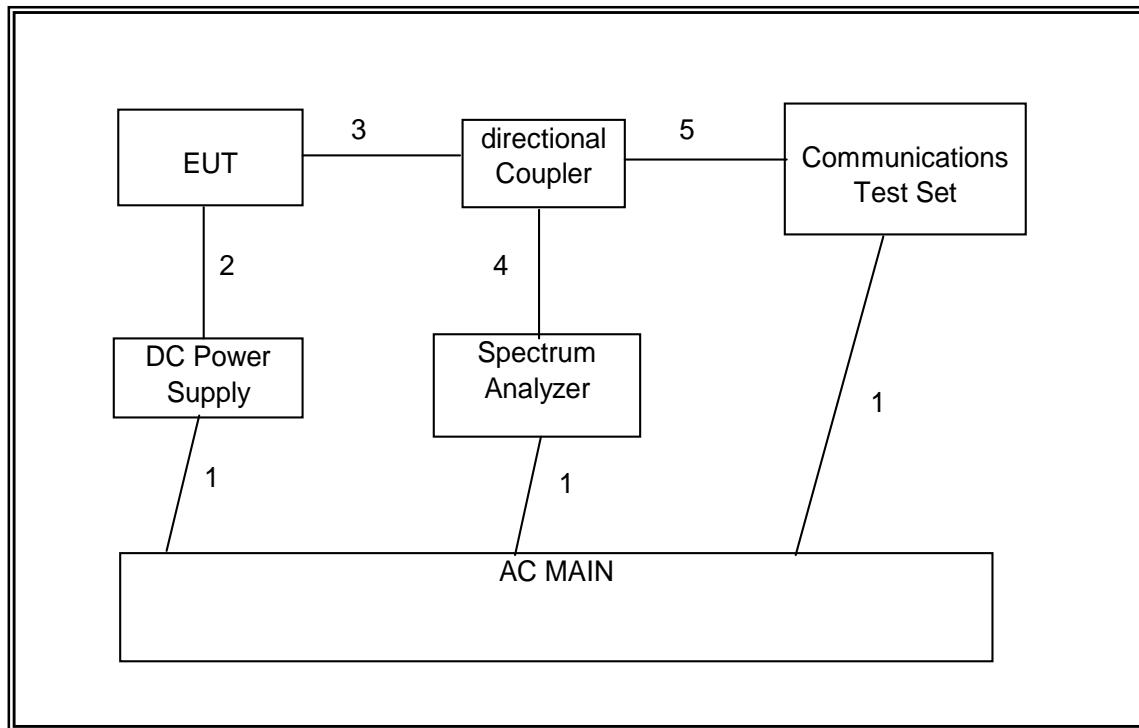

RADIATED SETUP

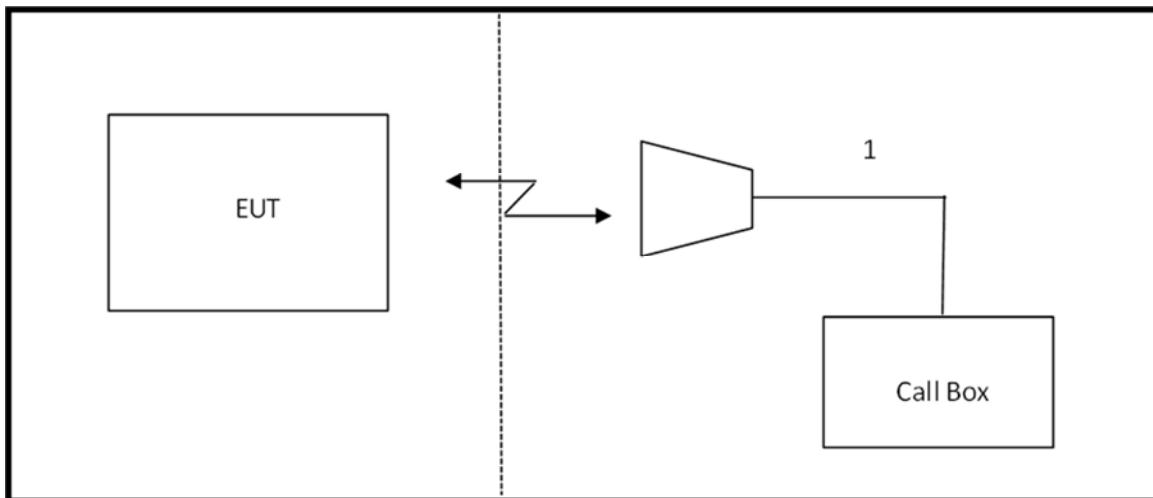

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Directional Coupler	Krytar	Directional Coupler	None	CNR
8960 series 10 wireless	Agilent	E5515E	F00362	09/11/14
Spectrum Analyzer, PXA,	Agilent	N9030A	F00129	05/25/15
Wideband Radio	R & S	CMW500	None	05/29/15
Temperature / Humidity	CSZ	ZPHS-8-3.5-SCT/WC	None	10/14/14
Signal Generator, 100KHz -	Agilent	8665B	F00124	03/12/15
Antenna, Tuned Dipole	ETS Lindgren	3121C DB4	C00993	01/23/15
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02686	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
HighPass Filter 1GHz	Micro-Tronics	HPM18129	None	CNR
Power Meter	Agilent	N1911A	F00022	04/09/15
Power Sensor	Agilent	E9323A	F00153	03/06/15
Antenna, Horn 1-18GHz	ETS Lindgren	3117	None	04/14/15
Antenna, Horn, 18 GHz	EMCO	3115	C00872	01/06/15
Amplifier, 1 to 18GHz	Miteq	AMF-5D-01001800-40-20P	F00394	11/27/14
Amplifier	Sonoma	310	F00008	05/28/15
Antenna, Biconolog, 30MHz-1	Sunol Sciences	JB3	F00027	05/05/15

7. RF POWER OUTPUT VERIFICATION

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with $VBW \geq RBW \geq 26dB$ BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

Using CMU200 Communication Test Set

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press **Connection control** to choose the different menus

Press **RESET** > choose all to reset all settings

Connection	Press Signal Off to turn off the signal and change settings Network Support > GSM+GPRS or GSM+EGPRS Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off
MS Signal	Press Slot Config bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850/900 > 27 dBm for EGPRS 850/900 > 30 dBm for GPRS1800/1900 > 26 dBm for EGPRS1800/1900
BS Signal	Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0> 4 dB Slot Config > Unchanged (if already set under MS Signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 (Default)
Network	Coding Scheme > CS 4 (GPRS) and MCS5-9 (EGPRS) Bit Stream > 2E9-1PSR Bit Pattern
AF/RF	Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press **Signal On** to turn on the signal and change settings

Using Agilent 8960A Communication Test Set

System Config: GSM/GPRS Mobile Test
E1968A A.06.31

CallParms: **BCH** → Cell Band: GSM850/PCS
 TCH → Traffic Band: GSM850/PCS
 Traffic Channel: 128/192/251 or 512/661/810
 MS Tx Level: 0
 PDTCH → Traffic Band: GSM850/PCS
 Traffic Channel: 128/192/251 512/661/810
 MS Tx Level: 0
 Coding Scheme: CS-4 (GPRS)
 Coding Scheme: MCS-5 to 9 (EGPRS)
 MultiSlot Config: 1up, 1 down (Assuming that the highest
conducted power)

Control: Active Cell → GSM/GPRS

7.1. GPRS/EGPRS MODE

LAT Part 22/24

Mode	Ch.	f (MHz)	1 time slot		2 time slots	
			Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)
GPRS	128	824.2	33.30	33.25	31.77	31.25
	190	836.6	33.40	33.30	31.85	31.70
	251	848.8	33.50	33.40	32.00	31.80
EGPRS	128	824.2	31.72	29.00	31.60	28.74
	190	836.6	31.66	28.75	31.62	28.63
	251	848.8	31.60	28.71	31.66	28.50
GPRS	512	1850.2	29.63	29.53	29.40	29.15
	661	1880.0	29.69	29.57	29.40	29.16
	810	1909.8	29.73	29.60	29.50	29.27
EGPRS	512	1850.2	30.60	27.90	30.50	27.82
	661	1880.0	30.67	27.95	30.62	27.75
	810	1909.8	30.56	27.81	30.30	27.66

UAT Part 22/24

Mode	Ch.	f (MHz)	1 time slot		2 time slots	
			Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)
GPRS	128	824.2	33.40	33.20	32.49	32.20
	190	836.6	33.26	33.04	32.33	32.03
	251	848.8	33.25	32.80	32.04	31.79
EGPRS	128	824.2	31.20	28.63	31.19	28.53
	190	836.6	31.15	28.58	31.13	28.49
	251	848.8	30.96	28.43	29.95	28.38
GPRS	512	1850.2	29.97	29.65	28.90	28.70
	661	1880.0	29.92	29.58	29.00	28.70
	810	1909.8	29.81	29.46	28.80	28.65
EGPRS	512	1850.2	30.05	27.33	30.03	27.29
	661	1880.0	30.01	27.28	30.00	27.28
	810	1909.8	29.94	27.05	29.92	27.03

7.2. UMTS REL99

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
	β_{ed}	Not Applicable

RESULTS

7.2.1. LAT

Part 22 850MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS850 (Band 5)	4132	4357	826.4	28.82	24.83
	4180	4405	836.0	28.91	24.90
	4230	4455	846.0	28.75	24.72

Part 24 1900MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS1900 (Band 2)	9262	9662	1852.4	27.91	24.15
	9400	9800	1880.0	28.15	24.20
	9538	9938	1907.6	27.70	24.10

Part 27 1700MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS1700 (Band 4)	1312	1537	1712.4	28.31	24.84
	1413	1638	1732.6	28.85	24.97
	1513	1738	1752.6	28.40	24.87

7.2.2. UAT

Part 22 850MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS850 (Band 5)	4132	4357	826.4	28.13	24.68
	4180	4405	836.0	27.98	24.48
	4230	4455	846.0	27.83	24.53

Part 24 1900MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS1900 (Band 2)	9262	9662	1852.4	26.09	23.00
	9400	9800	1880.0	26.40	23.25
	9538	9938	1907.6	26.30	23.15

Part 27 1700MHz Band

Bands	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
				Peak	Average
UMTS1700 (Band 4)	1312	1537	1712.4	26.39	22.95
	1413	1638	1732.6	26.50	23.06
	1513	1738	1752.6	26.52	23.00

7.3. HSDPA REL 5

The following 4 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Summary of settings are illustrated below:

	Mode	Rel5 HSDPA			
		1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
$A_{hs} = \beta_{hs}/\beta_c$		30/15			

Result

7.3.1. LAT

Part 22 850MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS850 (Band 5)	1	4132	4357	826.4	27.78	23.65
		4180	4405	836.0	27.83	23.66
		4230	4455	846.0	27.80	23.97
	2	4132	4357	826.4	28.20	23.93
		4180	4405	836.0	28.85	24.00
		4230	4455	846.0	28.30	23.98
	3	4132	4357	826.4	28.60	23.44
		4180	4405	836.0	28.30	23.49
		4230	4455	846.0	28.60	23.48
	4	4132	4357	826.4	28.83	23.42
		4180	4405	836.0	28.75	23.50
		4230	4455	846.0	28.01	23.47

Part 24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1900 (Band 2)	1	9262	9662	1852.4	27.37	22.86
		9400	9800	1880.0	27.62	23.25
		9538	9938	1907.6	27.58	22.96
	2	9262	9662	1852.4	27.43	22.84
		9400	9800	1880.0	27.58	22.79
		9538	9938	1907.6	27.45	22.93
	3	9262	9662	1852.4	27.30	22.71
		9400	9800	1880.0	27.42	22.80
		9538	9938	1907.6	27.39	22.43
	4	9262	9662	1852.4	27.31	22.40
		9400	9800	1880.0	27.47	22.79
		9538	9938	1907.6	27.32	22.55

Part 27 1700MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1700 (Band 4)	1	1312	1537	1712.4	27.73	23.99
		1413	1638	1732.6	27.83	23.95
		1513	1738	1752.6	27.86	23.95
	2	1312	1537	1712.4	27.90	23.96
		1413	1638	1732.6	27.80	23.96
		1513	1738	1752.6	28.00	24.00
	3	1312	1537	1712.4	27.75	23.54
		1413	1638	1732.6	27.80	23.95
		1513	1738	1752.6	27.88	23.55
	4	1312	1537	1712.4	27.80	23.53
		1413	1638	1732.6	27.90	23.67
		1513	1738	1752.6	27.80	23.56

7.3.2. UAT

Part 22 850MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS850 (Band 5)	1	4132	4357	826.4	27.48	23.52
		4180	4405	836.0	27.69	23.61
		4230	4455	846.0	28.06	23.66
	2	4132	4357	826.4	27.87	23.65
		4180	4405	836.0	27.55	23.60
		4230	4455	846.0	27.80	23.55
	3	4132	4357	826.4	27.72	23.05
		4180	4405	836.0	27.57	23.10
		4230	4455	846.0	27.67	23.06
	4	4132	4357	826.4	27.55	23.03
		4180	4405	836.0	27.60	23.09
		4230	4455	846.0	27.59	23.07

Part 24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1900 (Band 2)	1	9262	9662	1852.4	25.61	21.80
		9400	9800	1880.0	25.74	22.19
		9538	9938	1907.6	25.92	22.29
	2	9262	9662	1852.4	25.63	22.20
		9400	9800	1880.0	25.84	22.20
		9538	9938	1907.6	25.69	21.82
	3	9262	9662	1852.4	25.89	21.78
		9400	9800	1880.0	25.64	21.70
		9538	9938	1907.6	25.70	21.72
	4	9262	9662	1852.4	25.90	21.74
		9400	9800	1880.0	25.75	21.72
		9538	9938	1907.6	25.79	22.09

Part 27 1700MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1700 (Band 4)	1	1312	1537	1712.4	27.00	22.10
		1413	1638	1732.6	26.70	22.01
		1513	1738	1752.6	26.87	21.89
	2	1312	1537	1712.4	26.85	21.84
		1413	1638	1732.6	26.87	22.07
		1513	1738	1752.6	26.79	22.08
	3	1312	1537	1712.4	26.62	21.60
		1413	1638	1732.6	26.24	21.69
		1513	1738	1752.6	26.54	21.61
	4	1312	1537	1712.4	26.35	21.60
		1413	1638	1732.6	26.01	21.62
		1513	1738	1752.6	26.47	21.61

7.4. HSPA REL 6 (HSDPA & HSUPA)

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA			
	Subtest	1	2	3	4	5			
WCDMA General Settings	Loopback Mode	Test Mode 1							
	Rel99 RMC	12.2kbps RMC							
	HSDPA FRC	H-Set1							
	HSUPA Test	HSUPA Loopback							
	Power Control Algorithm	Algorithm2							
	β_c	11/15	6/15	15/15	2/15	15/15			
	β_d	15/15	15/15	9/15	15/15	0			
	β_{ec}	209/225	12/15	30/15	2/15	5/15			
	β_c/β_d	11/15	6/15	15/9	2/15	-			
	β_{hs}	22/15	12/15	30/15	4/15	5/15			
HSDPA Specific Settings	β_{ed}	1309/225	94/75	47/15	56/75	47/15			
	DACK	8							
	DNAK	8							
	DCQI	8							
	Ack-Nack repetition factor	3							
	CQI Feedback (Table 5.2B.4)	4ms							
	CQI Repetition Factor (Table 5.2B.4)	2							
HSUPA Specific Settings	Ahs = β_{hs}/β_c	30/15							
	D E-DPCCH	6	8	8	5	7			
	DHARQ	0	0	0	0	0			
	AG Index	20	12	15	17	12			
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67			
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9			
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27				

RESULTS

7.4.1. LAT

Part 22 850MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 850MHz (Band 5)	1	4132	4357	826.4	27.95	23.70
		4180	4405	836.0	28.25	23.75
		4230	4455	846.0	28.05	22.92
	2	4132	4357	826.4	27.71	22.65
		4180	4405	836.0	27.90	22.35
		4230	4455	846.0	27.68	22.60
	3	4132	4357	826.4	27.65	21.90
		4180	4405	836.0	27.76	21.75
		4230	4455	846.0	27.68	22.05
	4	4132	4357	826.4	27.67	22.65
		4180	4405	836.0	27.69	22.85
		4230	4455	846.0	27.75	22.95
	5	4132	4357	826.4	27.70	23.03
		4180	4405	836.0	27.56	23.07
		4230	4455	846.0	27.68	23.09

Part 24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 1900MHz (Band 2)	1	9262	9662	1852.4	27.19	22.75
		9400	9800	1880.0	27.57	23.00
		9538	9938	1907.6	27.53	22.87
	2	9262	9662	1852.4	27.17	22.49
		9400	9800	1880.0	27.52	22.02
		9538	9938	1907.6	27.31	21.96
	3	9262	9662	1852.4	27.38	21.29
		9400	9800	1880.0	27.37	21.34
		9538	9938	1907.6	27.44	21.44
	4	9262	9662	1852.4	27.39	21.99
		9400	9800	1880.0	27.28	22.22
		9538	9938	1907.6	27.30	22.11
	5	9262	9662	1852.4	27.47	22.34
		9400	9800	1880.0	27.32	22.44
		9538	9938	1907.6	27.27	22.39

Part24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 1900MHz (Band 2)	1	9262	9662	1852.4	25.49	22.12
		9400	9800	1880.0	25.58	22.12
		9538	9938	1907.6	25.98	22.27
	2	9262	9662	1852.4	25.43	21.67
		9400	9800	1880.0	25.55	21.76
		9538	9938	1907.6	25.66	21.64
	3	9262	9662	1852.4	25.33	21.01
		9400	9800	1880.0	25.62	21.14
		9538	9938	1907.6	25.49	21.46
	4	9262	9662	1852.4	25.63	21.93
		9400	9800	1880.0	25.61	22.14
		9538	9938	1907.6	25.56	22.16
	5	9262	9662	1852.4	25.47	22.15
		9400	9800	1880.0	25.59	22.18
		9538	9938	1907.6	25.56	21.97

Part 27 1700MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 1700MHz (Band 4)	1	1312	1537	1712.4	25.30	21.90
		1413	1638	1732.6	25.10	21.83
		1513	1738	1752.6	25.04	21.66
	2	1312	1537	1712.4	25.20	21.18
		1413	1638	1732.6	25.06	21.31
		1513	1738	1752.6	25.22	21.20
	3	1312	1537	1712.4	24.63	20.67
		1413	1638	1732.6	25.01	20.68
		1513	1738	1752.6	24.79	20.77
	4	1312	1537	1712.4	24.73	21.64
		1413	1638	1732.6	25.02	21.66
		1513	1738	1752.6	25.10	21.67
	5	1312	1537	1712.4	24.68	21.62
		1413	1638	1732.6	24.97	21.68
		1513	1738	1752.6	25.04	21.67

7.5. DUAL CARRIER HSDPA

DC-HSDPA (Rel 8, CAT 24)

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1:	The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.	
Note 2:	Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.	

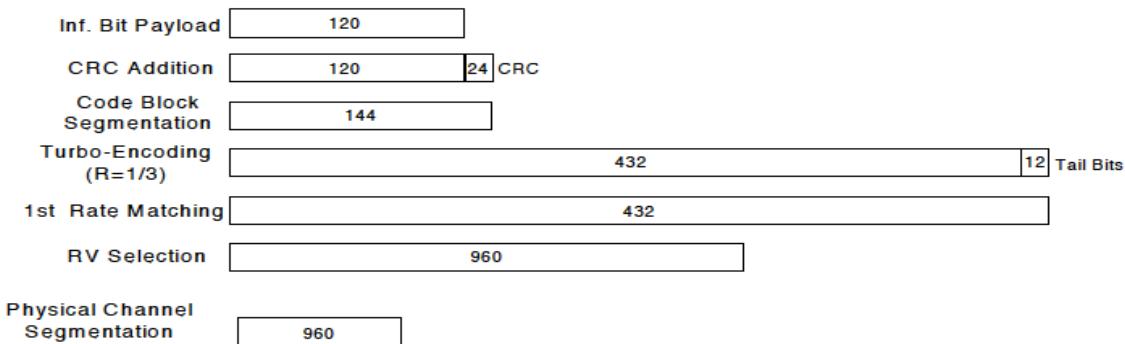


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs = β_{hs}/β_c	30/15			

RESULT

7.5.1. LAT

Part 22 850MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS850 (Band 5)	1	4132	4357	826.4	28.39	23.73
		4180	4405	836.0	28.36	23.72
		4230	4455	846.0	27.90	23.60
	2	4132	4357	826.4	28.22	23.75
		4180	4405	836.0	28.40	23.71
		4230	4455	846.0	27.65	23.61
	3	4132	4357	826.4	28.12	23.30
		4180	4405	836.0	28.10	23.25
		4230	4455	846.0	27.70	23.22
	4	4132	4357	826.4	28.00	23.28
		4180	4405	836.0	28.20	23.26
		4230	4455	846.0	28.16	23.23

Part 24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1900 (Band 2)	1	9262	9662	1852.4	27.15	23.00
		9400	9800	1880.0	27.21	22.94
		9538	9938	1907.6	27.59	22.98
	2	9262	9662	1852.4	27.75	23.02
		9400	9800	1880.0	27.30	22.95
		9538	9938	1907.6	27.60	23.00
	3	9262	9662	1852.4	27.71	22.53
		9400	9800	1880.0	27.72	22.48
		9538	9938	1907.6	27.45	22.48
	4	9262	9662	1852.4	26.71	22.53
		9400	9800	1880.0	27.45	22.48
		9538	9938	1907.6	27.49	22.49

Part 27 1700MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1700 (Band 4)	1	1312	1537	1712.4	28.04	23.60
		1413	1638	1732.6	28.24	23.59
		1513	1738	1752.6	27.66	23.58
	2	1312	1537	1712.4	28.13	23.64
		1413	1638	1732.6	28.44	23.60
		1513	1738	1752.6	27.76	23.59
	3	1312	1537	1712.4	28.24	23.21
		1413	1638	1732.6	28.04	23.14
		1513	1738	1752.6	27.15	23.14
	4	1312	1537	1712.4	27.96	23.22
		1413	1638	1732.6	28.22	23.13
		1513	1738	1752.6	27.29	23.11

7.5.2. UAT

Part 22 850MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS850 (Band 5)	1	4132	4357	826.4	27.25	23.30
		4180	4405	836.0	27.57	23.25
		4230	4455	846.0	27.67	23.34
	2	4132	4357	826.4	27.60	23.32
		4180	4405	836.0	27.60	23.20
		4230	4455	846.0	27.26	23.25
	3	4132	4357	826.4	27.28	22.82
		4180	4405	836.0	27.34	22.71
		4230	4455	846.0	27.42	22.75
	4	4132	4357	826.4	27.38	22.80
		4180	4405	836.0	27.15	22.75
		4230	4455	846.0	27.22	22.75

Part 24 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1900 (Band 2)	1	9262	9662	1852.4	26.45	21.80
		9400	9800	1880.0	26.80	21.86
		9538	9938	1907.6	26.66	21.80
	2	9262	9662	1852.4	27.00	22.00
		9400	9800	1880.0	26.93	21.95
		9538	9938	1907.6	26.65	21.83
	3	9262	9662	1852.4	26.50	21.40
		9400	9800	1880.0	26.74	21.49
		9538	9938	1907.6	26.62	21.37
	4	9262	9662	1852.4	26.41	21.37
		9400	9800	1880.0	26.55	21.49
		9538	9938	1907.6	26.45	21.40

Part 27 1700MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS1700 (Band 4)	1	1312	1537	1712.4	26.08	21.60
		1413	1638	1732.6	25.89	21.38
		1513	1738	1752.6	25.88	21.48
	2	1312	1537	1712.4	25.93	21.58
		1413	1638	1732.6	25.88	21.43
		1513	1738	1752.6	25.88	21.48
	3	1312	1537	1712.4	25.39	21.23
		1413	1638	1732.6	25.69	21.23
		1513	1738	1752.6	25.70	21.18
	4	1312	1537	1712.4	25.69	21.23
		1413	1638	1732.6	25.78	21.00
		1513	1738	1752.6	25.50	21.13

7.6. CDMA2000 1xRTT

Maximum output power is verified on the Low, Middle and High channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E for 1xRTT, section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rel. 0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev. A

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
CDMA2000 Mobile Test	B.15.18, L

- Protocol Rev > 6 (IS-2000-0)
- System ID: 18; NID: 65535, Reg. Ch. #: 384 for Cell, 600 for PCS & 450 for AWS
- Radio Config (RC) > RC1 or RC3
- Service Option (SO) Setup > SO55 or SO32
- Traffic Data Rate > Full
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULT

7.6.1. LAT

CDMA2000 1xRTT, BC0, CELL BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 1013 - 824.7MHz		CH 384 - 836.52MHz		CH 777 - 848.31MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.31	24.67	29.41	24.72	29.09	24.62
	55 (Loopback)	29.54	24.68	29.48	24.73	29.06	24.64
RC2	9 (Loopback)	29.45	24.66	29.32	24.73	29.03	24.61
	55 (Loopback)	29.38	24.67	29.57	24.92	29.05	24.70
RC3	2 (Loopback)	29.38	24.65	29.13	24.67	29.02	24.65
	55 (Loopback)	29.29	24.63	29.16	24.67	29.02	24.69
	32 (+ F-SCH)	29.51	24.65	29.43	24.68	29.08	24.69
	32 (+ SCH)	29.40	24.70	29.20	24.71	29.05	24.57
RC4	2 (Loopback)	29.13	24.64	29.10	24.70	29.04	24.60
	55 (Loopback)	29.28	24.65	29.10	24.70	29.01	24.60
	32 (+ F-SCH)	29.22	24.63	29.15	24.68	29.07	24.57
	32 (+ SCH)	29.11	24.66	29.17	24.69	29.06	24.54
RC5	9 (Loopback)	29.15	24.65	29.12	24.71	29.00	24.58
	55 (Loopback)	29.18	24.66	29.13	24.69	29.00	24.57

CDMA2000 1xRTT, BC1, PCS BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1851.25MHz		CH 600 - 1880MHz		CH 1175 - 1908.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	28.68	24.17	29.17	24.18	28.81	24.17
	55 (Loopback)	28.75	24.19	29.23	24.20	28.63	24.19
RC2	9 (Loopback)	28.73	24.16	29.15	24.17	28.67	24.17
	55 (Loopback)	28.70	24.15	29.21	24.17	28.67	24.16
RC3	2 (Loopback)	28.46	24.14	28.75	24.19	28.55	24.13
	55 (Loopback)	28.49	24.14	28.68	24.18	28.54	24.15
	32 (+ F-SCH)	28.40	24.07	28.58	24.18	28.62	24.18
	32 (+ SCH)	28.58	24.10	28.67	24.19	28.57	24.18
RC4	2 (Loopback)	28.49	24.13	28.69	24.18	28.63	24.18
	55 (Loopback)	28.32	24.12	28.80	24.19	28.41	24.18
	32 (+ F-SCH)	28.59	24.14	28.62	24.19	28.69	24.18
	32 (+ SCH)	28.42	24.08	28.78	24.18	28.69	24.18
RC5	9 (Loopback)	28.49	24.13	28.78	24.17	28.52	24.18
	55 (Loopback)	28.57	24.14	28.84	24.18	28.57	24.18

CDMA 1xRTT, BC15, AWS BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1711.25MHz		CH 450 - 1732.5MHz		CH 875 - 1753.75MHz	
Peak	Average	Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.60	24.82	29.79	24.83	29.49	24.68
	55 (Loopback)	29.75	24.81	29.71	24.80	29.48	24.68
RC2	9 (Loopback)	29.51	24.81	29.83	24.82	29.48	24.68
	55 (Loopback)	29.72	24.80	29.90	24.85	29.46	24.67
RC3	2 (Loopback)	29.18	24.79	29.19	24.81	29.19	24.65
	55 (Loopback)	29.41	24.79	29.24	24.82	29.03	24.66
	32 (+ F-SCH)	29.34	24.77	29.31	24.79	29.24	24.63
	32 (+ SCH)	29.32	24.76	29.24	24.78	29.07	24.65
RC4	2 (Loopback)	29.10	24.78	29.37	24.80	29.17	24.67
	55 (Loopback)	29.20	24.79	29.21	24.81	29.08	24.66
	32 (+ F-SCH)	29.24	24.77	29.23	24.76	29.10	24.61
	32 (+ SCH)	29.23	24.73	29.25	24.76	29.11	24.64
RC5	9 (Loopback)	29.00	24.77	29.01	24.79	29.17	24.67
	55 (Loopback)	29.35	24.78	29.25	24.80	29.00	24.65

LAT CDMA 1xRTT, BC10, SECONDARY 800

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 450 - 817.25MHz		CH 560 - 820MHz		CH 670 - 822.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.16	24.48	29.15	24.53	28.92	24.47
	55 (Loopback)	29.05	24.66	29.20	24.70	28.86	24.56
RC2	9 (Loopback)	29.04	24.45	29.05	24.52	28.92	24.46
	55 (Loopback)	29.04	24.47	29.16	24.51	28.92	24.47
RC3	2 (Loopback)	29.01	24.43	29.04	24.51	28.80	24.43
	55 (Loopback)	28.94	24.43	28.89	24.50	28.78	24.45
	32 (+ F-SCH)	29.11	24.40	29.03	24.47	28.83	24.43
	32 (+ SCH)	29.03	24.41	28.95	24.47	28.79	24.40
RC4	2 (Loopback)	29.04	24.43	28.98	24.49	28.74	24.43
	55 (Loopback)	29.04	24.43	28.88	24.49	28.84	24.44
	32 (+ F-SCH)	29.08	24.40	28.92	24.48	28.83	24.43
	32 (+ SCH)	29.17	24.43	28.83	24.51	28.86	24.42
RC5	9 (Loopback)	29.02	24.42	28.95	24.50	28.76	24.43
	55 (Loopback)	29.15	24.43	28.97	24.50	28.81	24.42

7.6.2. UAT

CDMA2000 1xRTT, BC0, CELL BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 1013 - 824.7MHz		CH 384 - 836.52MHz		CH 777 - 848.31MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.16	24.48	29.15	24.53	28.92	24.47
	55 (Loopback)	29.05	24.46	29.20	24.55	28.86	24.46
RC2	9 (Loopback)	29.04	24.45	29.05	24.52	28.92	24.46
	55 (Loopback)	29.04	24.47	29.16	24.51	28.92	24.47
RC3	2 (Loopback)	29.01	24.43	29.04	24.51	28.80	24.43
	55 (Loopback)	28.94	24.43	28.89	24.50	28.78	24.45
	32 (+ F-SCH)	29.11	24.40	29.03	24.47	28.83	24.43
	32 (+ SCH)	29.03	24.41	28.95	24.47	28.79	24.40
RC4	2 (Loopback)	29.04	24.43	28.98	24.49	28.74	24.43
	55 (Loopback)	29.04	24.43	28.88	24.49	28.84	24.44
	32 (+ F-SCH)	29.08	24.40	28.92	24.48	28.83	24.43
	32 (+ SCH)	29.17	24.43	28.83	24.51	28.86	24.42
RC5	9 (Loopback)	29.02	24.42	28.95	24.50	28.76	24.43
	55 (Loopback)	29.15	24.43	28.97	24.50	28.81	24.42

CDMA2000 1xRTT, BC1, PCS BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1851.25MHz		CH 600 - 1880MHz		CH 1175 - 1908.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	27.95	23.13	27.95	23.07	27.86	23.09
	55 (Loopback)	27.91	23.14	28.06	23.10	27.94	23.10
RC2	9 (Loopback)	27.96	23.13	27.96	23.06	27.97	23.10
	55 (Loopback)	28.00	23.13	27.97	23.09	28.02	23.10
RC3	2 (Loopback)	27.60	23.13	27.95	23.06	27.64	23.08
	55 (Loopback)	27.63	23.13	27.97	23.06	27.52	23.07
	32 (+ F-SCH)	27.53	23.09	27.91	23.03	27.67	23.07
	32 (+ SCH)	27.58	23.07	27.94	23.02	27.64	23.09
RC4	2 (Loopback)	27.60	23.11	27.76	23.04	27.58	23.10
	55 (Loopback)	27.52	23.11	27.70	23.04	27.84	23.09
	32 (+ F-SCH)	27.63	23.07	27.73	23.03	27.69	23.06
	32 (+ SCH)	27.56	23.09	27.65	23.04	27.54	23.04
RC5	9 (Loopback)	27.54	23.11	27.74	23.04	27.60	23.08
	55 (Loopback)	27.41	23.12	27.67	23.06	27.65	23.08

CDMA 1xRTT, BC15, AWS BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1711.25MHz		CH 450 - 1732.5MHz		CH 875 - 1753.75MHz	
Peak	Average	Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	27.30	22.94	26.52	22.92	27.35	22.95
	55 (Loopback)	27.36	22.95	26.51	22.91	27.36	22.94
RC2	9 (Loopback)	27.30	22.96	26.53	22.93	27.32	22.95
	55 (Loopback)	27.35	22.97	26.58	22.92	27.40	23.00
RC3	2 (Loopback)	27.30	22.93	26.51	22.95	27.30	22.94
	55 (Loopback)	27.31	22.93	26.54	22.94	27.28	22.95
	32 (+ F-SCH)	27.23	22.95	26.55	22.91	27.28	22.92
	32 (+ SCH)	27.26	22.95	26.46	22.92	27.35	22.93
RC4	2 (Loopback)	27.32	22.96	26.52	22.90	27.25	22.93
	55 (Loopback)	27.35	22.94	26.48	22.93	27.26	22.93
	32 (+ F-SCH)	27.25	22.94	26.56	22.90	27.27	22.99
	32 (+ SCH)	27.25	22.94	26.55	22.91	27.25	22.93
RC5	9 (Loopback)	27.30	22.95	26.57	22.92	27.24	22.94
	55 (Loopback)	27.22	22.94	26.52	22.93	27.26	22.93

1xRTT, BC10, SECONDARY 800

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 450 - 817.25MHz		CH 560 - 820MHz		CH 670 - 822.75MHz	
Peak	Average	Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.16	24.39	29.31	24.39	29.30	24.38
	55 (Loopback)	29.40	24.42	29.35	24.40	29.38	24.37
RC2	9 (Loopback)	29.09	24.39	29.27	24.37	29.38	24.38
	55 (Loopback)	29.05	24.39	29.10	24.40	29.20	24.37
RC3	2 (Loopback)	28.98	24.37	29.06	24.37	28.91	24.36
	55 (Loopback)	29.01	24.36	28.93	24.36	28.93	24.38
	32 (+ F-SCH)	28.91	24.36	28.99	24.33	29.02	24.32
	32 (+ SCH)	28.97	24.36	28.90	24.34	29.01	24.33
RC4	2 (Loopback)	28.92	24.38	28.93	24.36	28.99	24.38
	55 (Loopback)	28.99	24.36	29.06	24.36	28.92	24.36
	32 (+ F-SCH)	28.97	24.35	28.87	24.35	28.96	24.35
	32 (+ SCH)	28.97	24.36	29.10	24.34	29.08	24.30
RC5	9 (Loopback)	28.94	24.37	28.95	24.37	28.91	24.36
	55 (Loopback)	29.04	24.37	28.97	24.38	28.92	24.37

7.7. CDMA2000 1xEV-DO - Release 0 (Rel. 0)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

EVDO Release 0 - RTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- CallParms:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- CallParms:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

7.7.1. LAT

CDMA2000 EVDO REV 0 850MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	1013	824.70	29.57	24.73
		384	836.52	29.58	24.80
		777	848.31	28.85	24.70

CDMA2000 EVDO REL. 0 1900MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	25	1851.25	28.80	24.18
		600	1880.00	28.80	24.17
		1175	1908.75	28.90	24.20

CDMA2000 EVDO REL. 0 1700MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	25	1711.25	29.16	24.60
		450	1732.50	29.20	24.75
		875	1753.75	29.00	24.55

CDMA2000 EVDO REL. 0 800MHz SECONDARY BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	450	817.25	29.00	24.60
		560	820.00	29.08	24.65
		670	822.75	29.10	24.70

7.7.2. UAT

CDMA2000 EVDO REV. 0 850MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	1013	824.70	29.34	24.50
		384	836.52	29.28	24.43
		777	848.31	28.81	24.38

CDMA2000 EVDO REL. 0 1900MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	25	1851.25	27.80	23.15
		600	1880.00	27.70	23.10
		1175	1908.75	27.66	23.08

CDMA2000 EVDO REL. 0 1700MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	25	1711.25	28.20	23.00
		450	1732.50	28.22	23.03
		875	1753.75	28.25	22.96

CDMA2000 EVDO REV. 0 800MHz SECONDARY BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	450	817.25	29.25	24.45
		560	820.00	29.42	24.47
		670	822.75	29.50	24.50

7.8. CDMA2000 1xEV-DO - Revision A (Rev. A)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

Application	Rev. License
1xEV-DO Terminal Test	A.09.13

EVDO Rev. A – RETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
> PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000:
00000000
 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
 > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Rev. A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
> PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000:
00000000
 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
 > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULTS

7.8.1. LAT

CDMA2000 EVDO REV. A 850MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	1013	824.70	29.62	24.65
		384	836.52	29.63	24.85
		777	848.31	28.94	24.80

LAT CDMA2000 EVDO REV. A 1900MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	25	1851.25	29.05	24.23
		600	1880.00	29.00	24.20
		1175	1908.75	29.10	24.25

LAT CDMA2000 EVDO REV. A 1700MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	25	1711.25	29.50	24.65
		450	1732.50	29.60	24.79
		875	1753.75	29.52	24.70

LAT CDMA2000 EVDO REV. A 800MHz SECONDARY BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	450	817.25	29.31	24.69
		560	820.00	29.53	24.76
		670	822.75	29.40	24.75

7.8.2. UAT

CDMA2000 EVDO REV. A 850MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	1013	824.70	29.40	24.50
		384	836.52	29.32	24.48
		777	848.31	28.96	24.43

CDMA2000 EVDO REV. A 1900MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	25	1851.25	28.04	23.15
		600	1880.00	27.99	23.10
		1175	1908.75	27.83	23.05

CDMA2000 EVDO REV. A 1700MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	25	1711.25	28.10	22.96
		450	1732.50	28.85	23.10
		875	1753.75	28.73	23.00

CDMA2000 EVDO REV. A 800MHz SECONDARY BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	450	817.25	29.32	24.50
		560	820.00	29.45	24.51
		670	822.75	29.35	24.50

7.9. CDMA2000 1xEV-DO - Revision B (Rev. B)

This procedure assumes the Rohde & Schwarz CMW 500 CDMA Rev. B Test Set has the following applications installed and with valid license.

Application	Rev.	License
1xEV-DO Terminal Test V.2.1.25		

1xEV-DO Release B –

- CMW 500 Signal Generator > 1xEV-DO Taskbar Enable
- CMW 500 1xEV-DO Signaling Configuration Window >
- 1xEV-DO Signaling On Window:
 - Under Access Network Control:
 - Band Class: BC0: US Cellular
 - RF Channel: 31
 - 1xEV-DP Power: -70dBm
 - Release B
- 1xEV-DO Signaling Configuration Window

Under RF Frequency Band / Channel: Enter Ch. Frequency

➤ Under Carrier Configuration: RF Frequency

For Two Carriers: Low Channel (1013)

	RF Channel	RF Channel Offset
Carrier [0]	31	0
Carrier [1]	1013	982

➤ Under Carrier Configuration: RF Pilot

	Carrier Sector	Active on AN	Assigned to AT
Pilot [0]	C0/S0	✓	✓
	CA/S1	✓	✓

For Three Carriers: Low Channel (1013)

	RF Channel	RF Channel Offset
Carrier [0]	72	0
Carrier [1]	31	-41
Carrier [2]	1013	941

➤ Under Carrier Configuration: RF Pilot

	Carrier Sector	Active on AN	Assigned to AT
Pilot [0]	C0/S0	✓	✓
Pilot [1]	C1/S1	✓	✓
Pilot [2]	C2/S2	✓	✓

- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULTS

7.9.1. LAT

Two Carrier Min Separations

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	CDMA	1013+31	824.70+825.93	27.61	21.51
		384+425	836.52+837.75	27.70	21.65
		736+777	847.08+848.31	27.40	21.60

Two Carrier Max Separations

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	CDMA	1013+156	824.70+829.68	26.80	21.60
		384+550	836.52+841.50	27.00	21.65
		611+777	843.33+848.31	26.20	21.50

Three Carrier Min Separations

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	CDMA	1013+31+72	824.70+825.93+827.16	27.10	21.42
		384+425+466	836.52+837.75+838.98	27.15	21.56
		695+736+777	845.85+847.08+848.31	27.00	21.40

7.9.2. UAT

Two Carrier Min Separations

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	CDMA	1013+31	824.70+825.93	27.42	21.35
		384+425	836.52+837.75	27.50	21.40
		736+777	847.08+848.31	27.40	21.30

Two Carrier Max Separations

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	CDMA	1013+156	824.70+829.68	25.80	21.00
		384+550	836.52+841.50	26.00	21.02
		611+777	843.33+848.31	25.90	20.90

Three Carrier Min Separations

	Mode	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
Rev B	CDMA	1013+31+72	824.70+825.93+827.16	26.10	20.90
		384+425+466	836.52+837.75+838.98	26.25	21.00
		695+736+777	845.85+847.08+848.31	26.16	20.90

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

MODES TESTED

- GPRS and EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, BC0, BC1, BC10 and BC15

RESULTS

GSM-GPRS MODE

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
CELL	GPRS	128	824.2	243.3410	305.021
		190	836.6	245.9563	318.834
		251	848.8	243.7521	308.928

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (KHz)
PCS	GPRS	512	1850.2	249.1832	313.115
		661	1880.0	243.0796	301.667
		810	1909.8	242.2429	314.469

GSM-EGPRS MODE

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
CELL	EGPRS	128	824.2	243.2846	305.688
		190	836.6	248.1753	313.677
		251	848.8	250.2209	306.859

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
PCS	EGPRS	512	1850.2	245.813	316.820
		661	1880.0	240.0781	322.222
		810	1909.8	244.1798	312.863

WCDMA PART 22, 24, AND 27

Band	Mode	DL Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
850MHz		4357	826.40	4.1118	4.564
		4408	836.00	4.1265	4.607
		4458	846.60	4.1899	4.644
1900MHz	UMTS Rel. 99	9662	1852.40	4.2178	4.559
		9800	1880.00	4.2894	4.594
		9938	1907.60	4.172	4.64
		1537	1712.40	4.1252	4.574
1700MHz		1638	1732.00	4.1527	4.587
		1738	1752.60	4.1999	4.518

WCDMA PART 22, 24, AND 27

Band	Mode	DL Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)	
850MHz	UMTS HSDPA	4357	826.40	4.2064	4.514	
		4408	836.00	4.0484	4.549	
		4458	846.60	4.1555	4.604	
1900MHz		9662	1852.40	4.2915	4.604	
		9800	1880.00	4.1703	4.575	
		9938	1907.60	4.2025	4.604	
1700MHz		1537	1712.40	4.1469	4.558	
		1638	1732.00	4.0409	4.525	
		1738	1752.60	4.0589	4.556	

CDMA PART 22, 24, 27 AND 90

Band	Mode	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)	
CELL	CDMA 2000 1xRTT	1013	824.70	1.2514	1.382	
		384	836.52	1.2948	1.397	
		777	848.31	1.2749	1.372	
PCS		25	1851.25	1.2702	1.398	
		600	1880.00	1.2716	1.395	
		1175	1908.75	1.2680	1.395	
AWS		25	1711.25	1.2745	1.388	
		450	1732.50	1.2577	1.394	
		875	1753.75	1.2741	1.395	
800 MHz Secondary		450	817.25	1.2829	1.373	
		580	820.00	1.2732	1.395	
		670	822.75	1.2684	1.395	

CDMA PART 22, 24, 27 AND 90



Band	Mode	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
CELL	CDMA 2000	1013	824.70	1.2305	1.387
		384	836.52	1.2651	1.391
		777	848.31	1.2823	1.396
PCS	EVDO Rev. A	25	1851.25	1.2882	1.408
		600	1880.00	1.2563	1.402
		1175	1908.75	1.2586	1.366
AWS	EVDO Rev. A	25	1711.25	1.2648	1.368
		450	1732.50	1.2547	1.394
		875	1753.75	1.2734	1.435
800 MHz Secondary	EVDO Rev. A	450	817.25	1.2685	1.382
		580	820.00	1.2808	1.373
		670	822.75	1.2658	1.419


CDMA PART 22

Band	Mode	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
CELL	CDMA 2000 EVDO Rev. B	1013+31	824.70+825.93	2.4603	2.629
		384+425	836.52+837.75	2.4904	2.658
		736+777	847.08+848.31	2.4620	2.654
		1013+156	824.70+829.68	6.2975	6.588
		384+550	836.52+841.50	6.3501	6.712
		611+777	843.33+848.31	6.3830	6.586
		1013+31+72	824.70+825.93+827.16	3.6260	3.949
		384+425+466	836.52+837.75+838.98	3.7331	3.929
		695+736+777	845.85+847.08+848.31	3.7020	3.932


8.1.1. GSM-GPRS



850MHz BAND

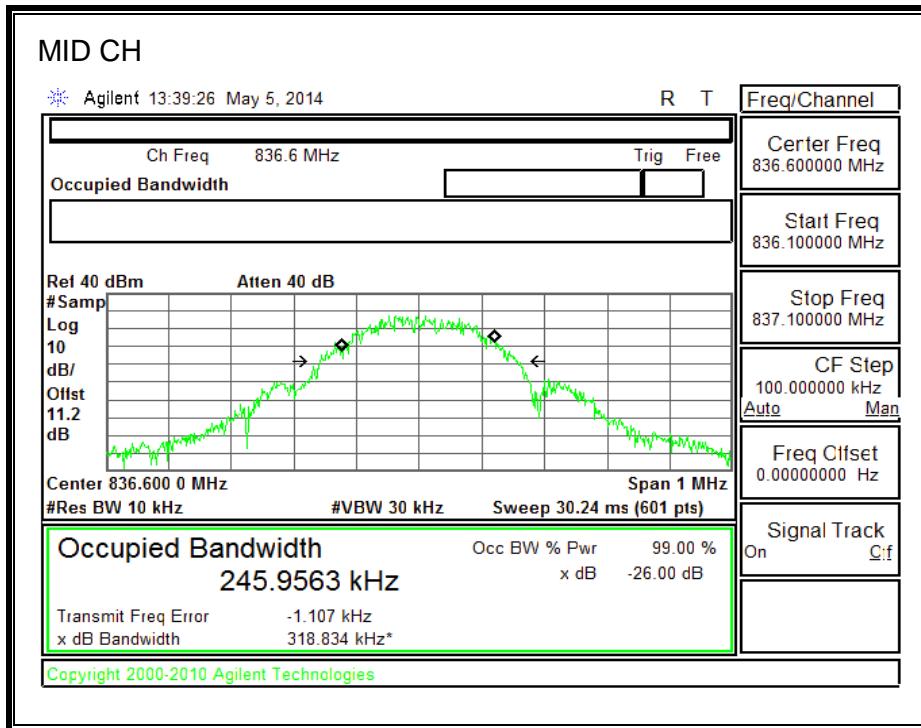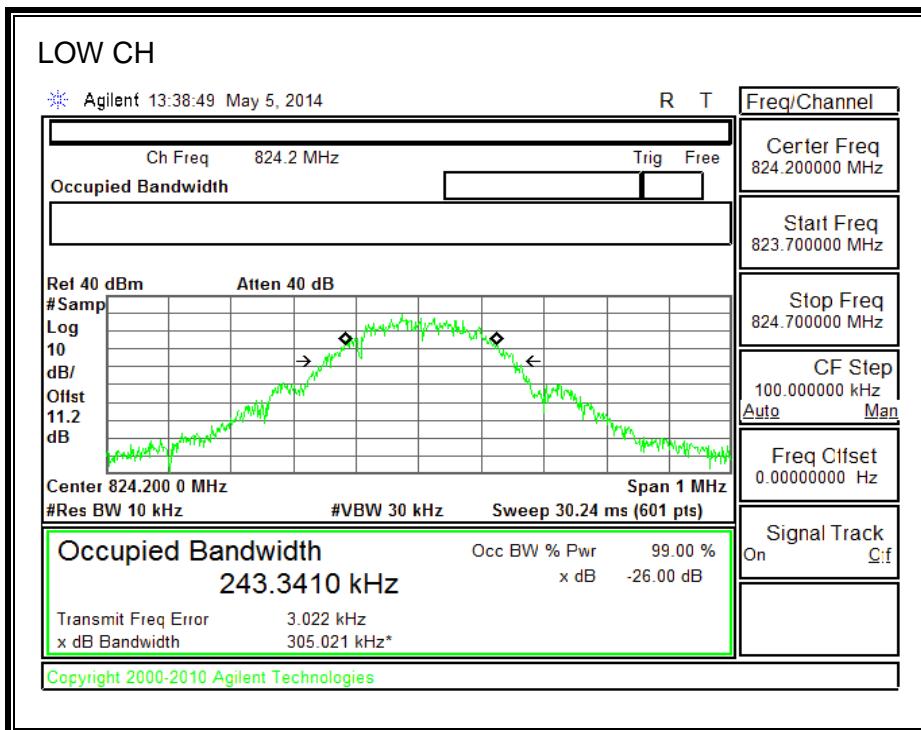

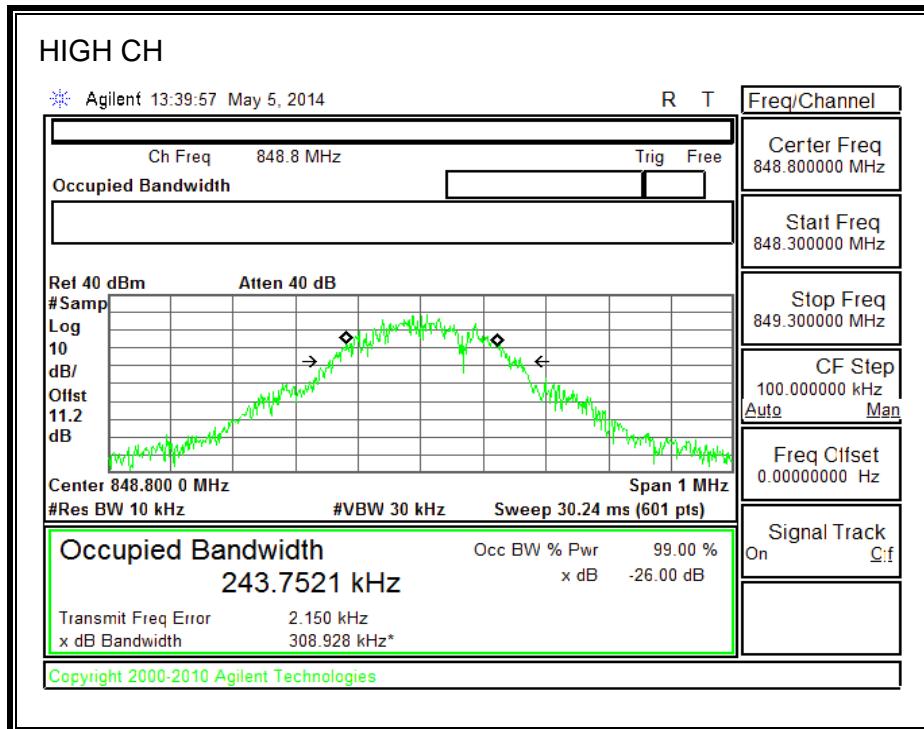



1900MHz BAND

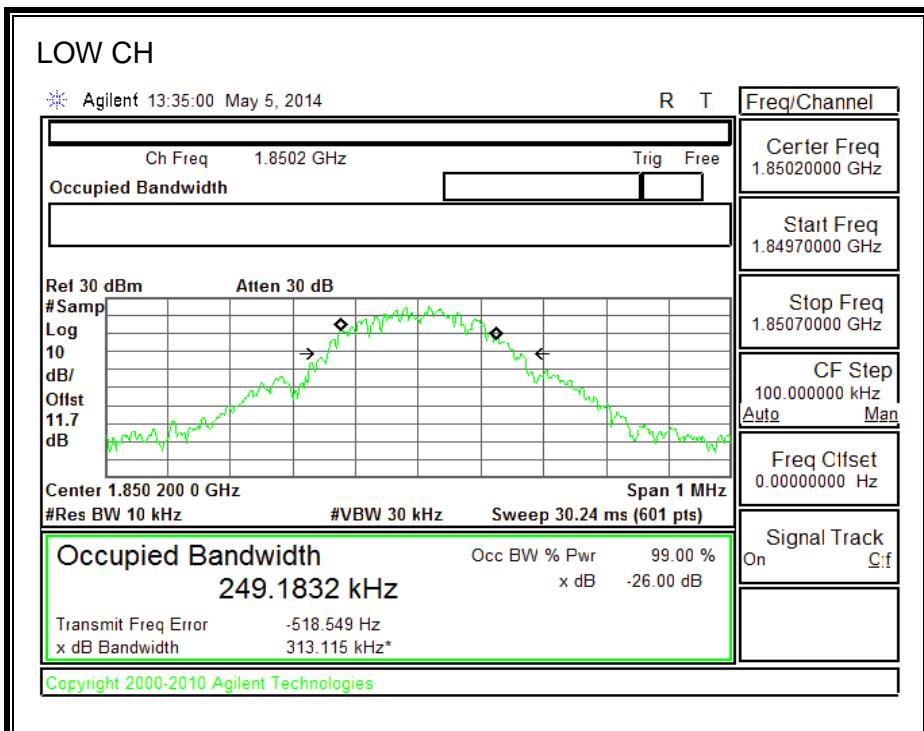


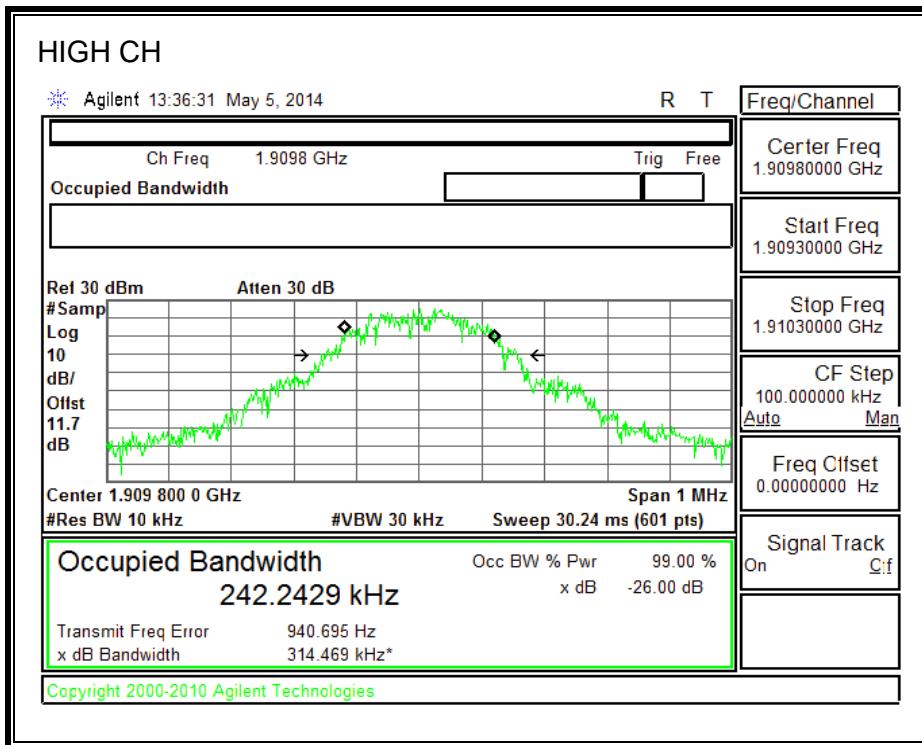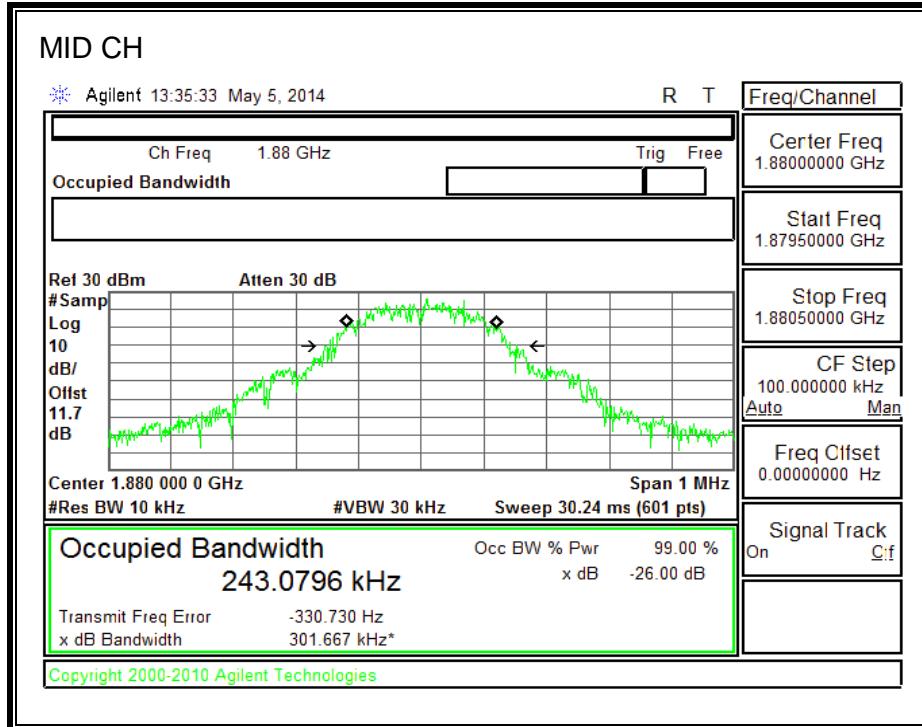


8.1.2. GSM-EGPRS



850MHz BAND

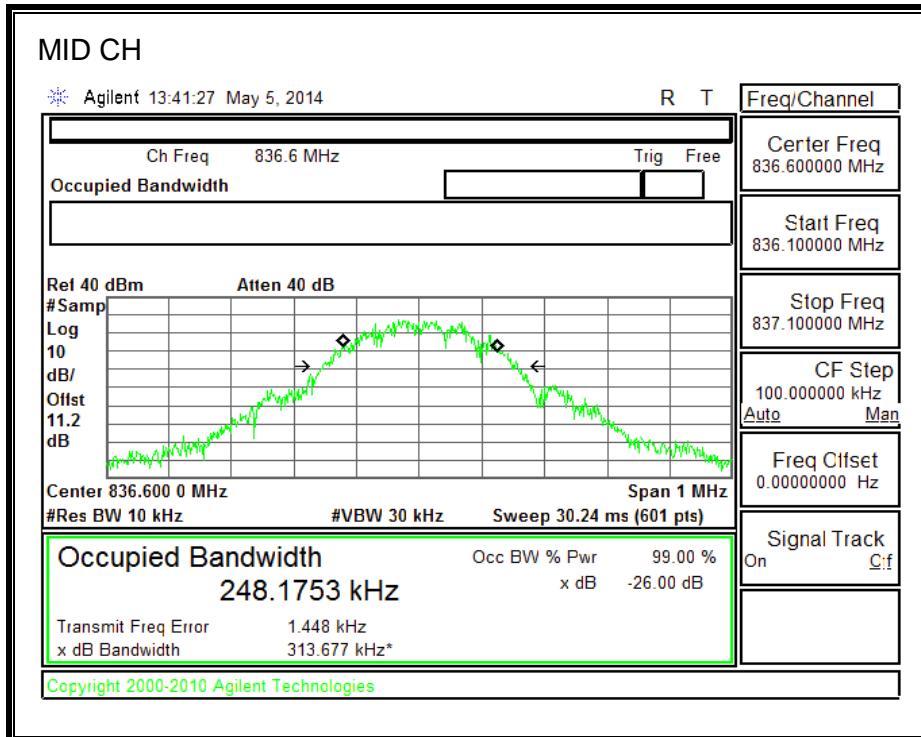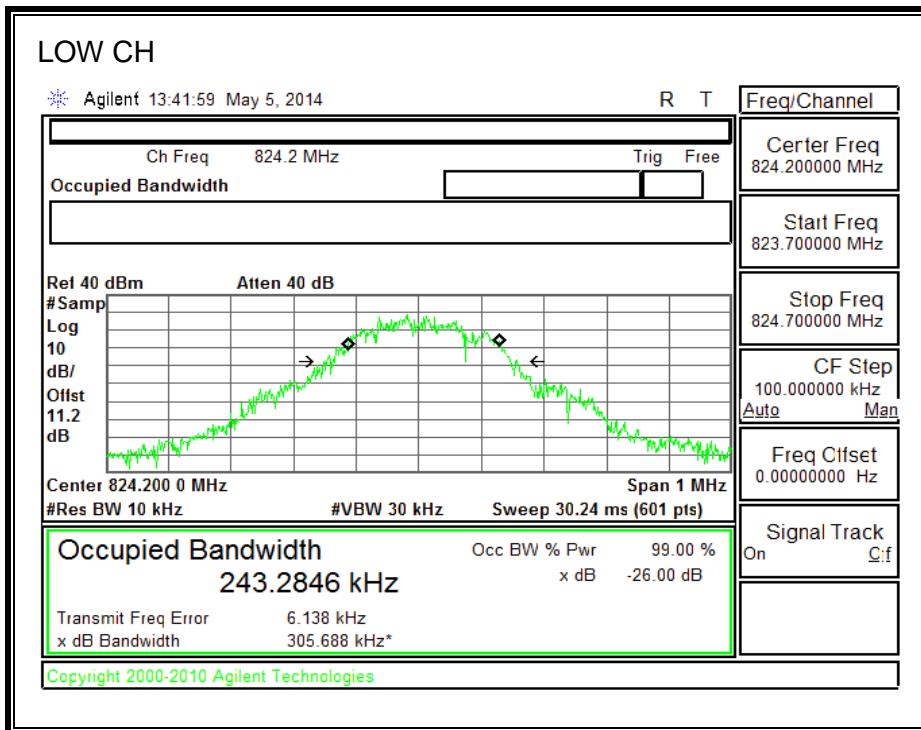

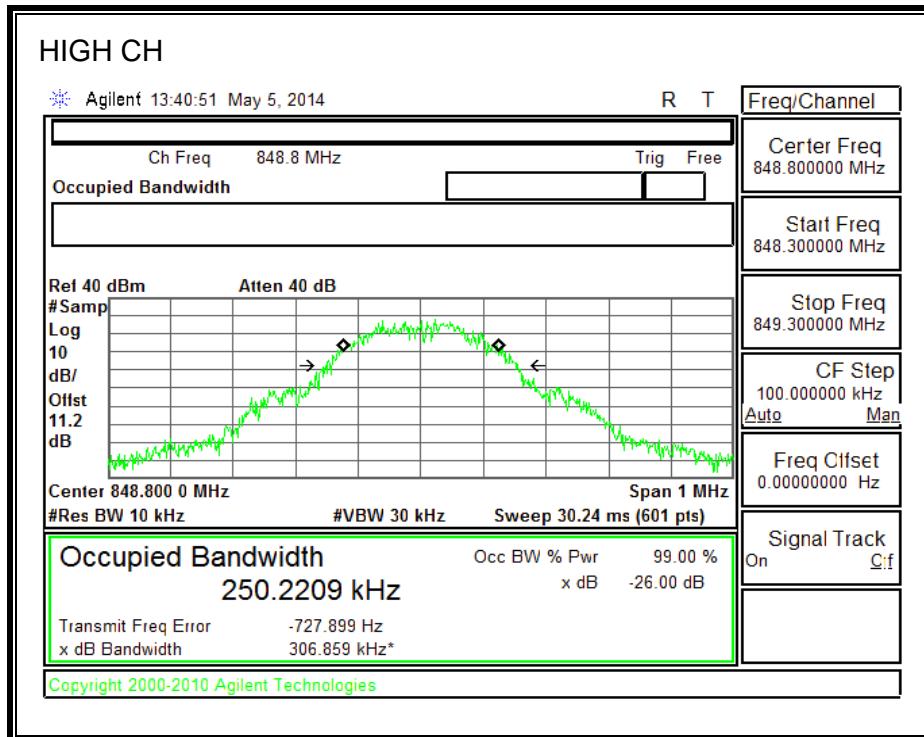



1900MHz BAND

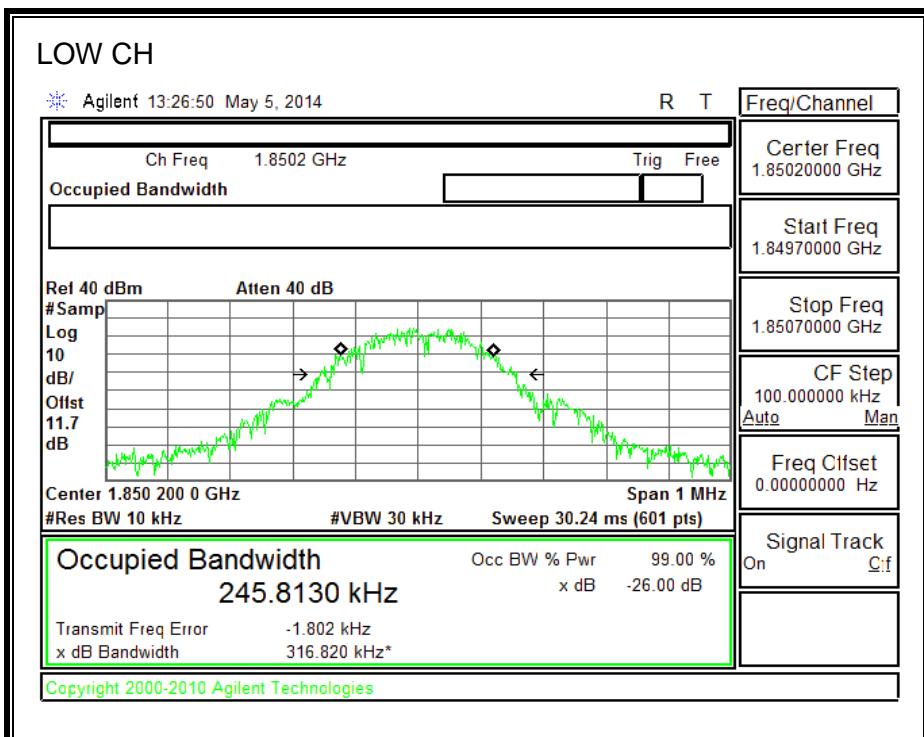


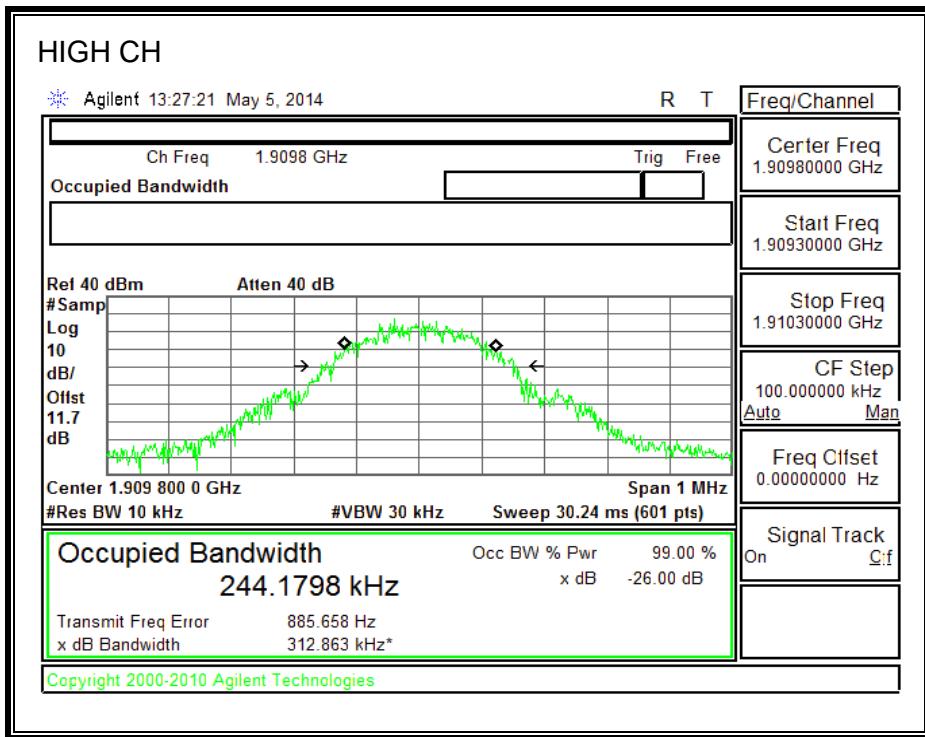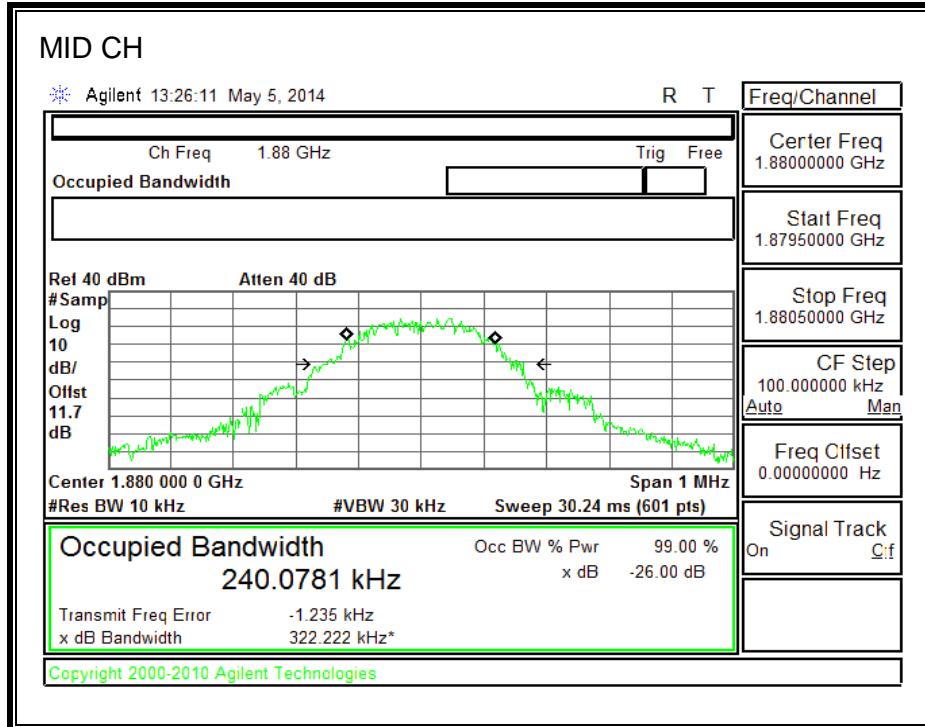


8.1.3. UMTS Rel. 99



850MHz BAND

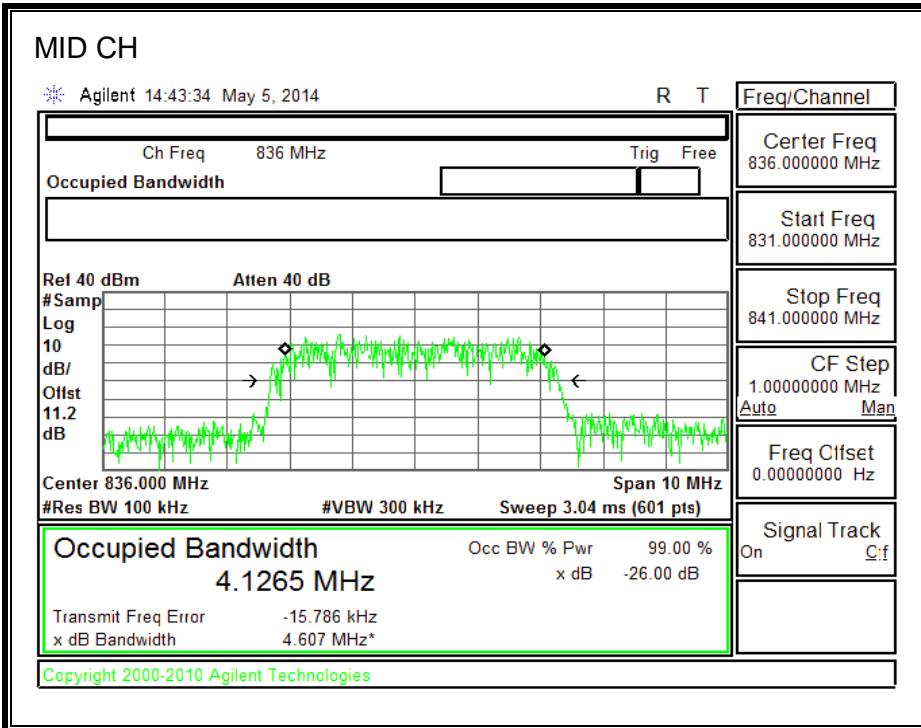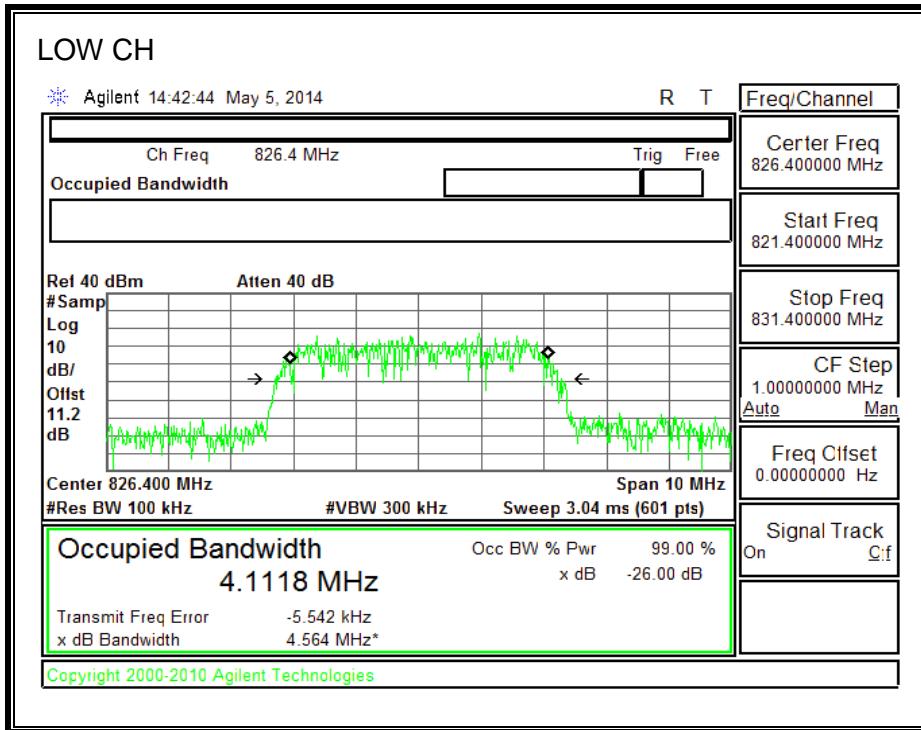


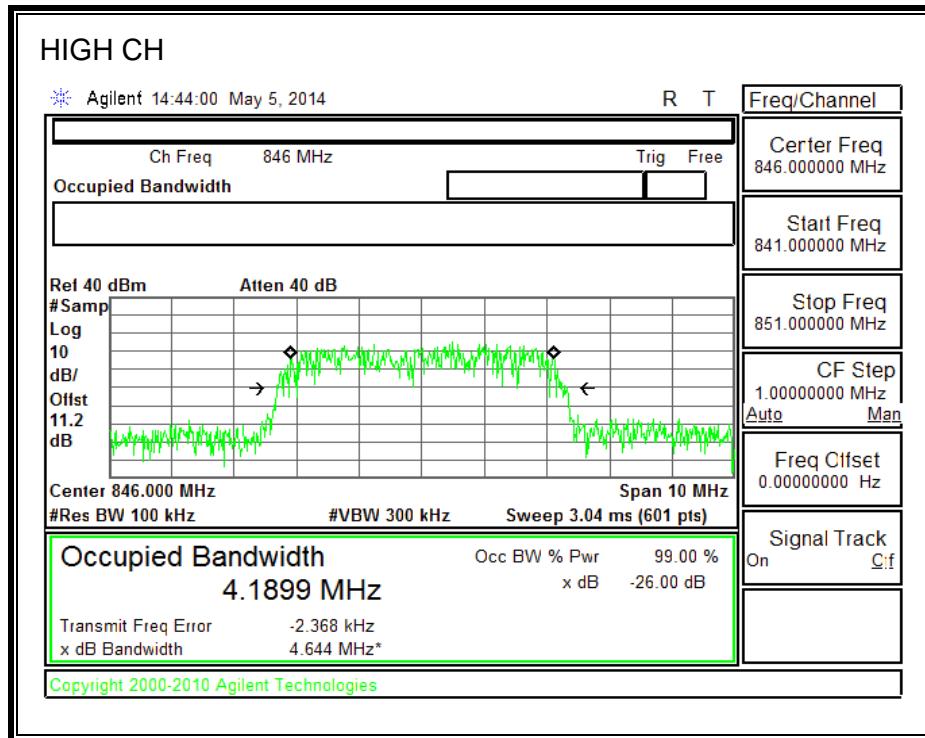



1900MHz BAND

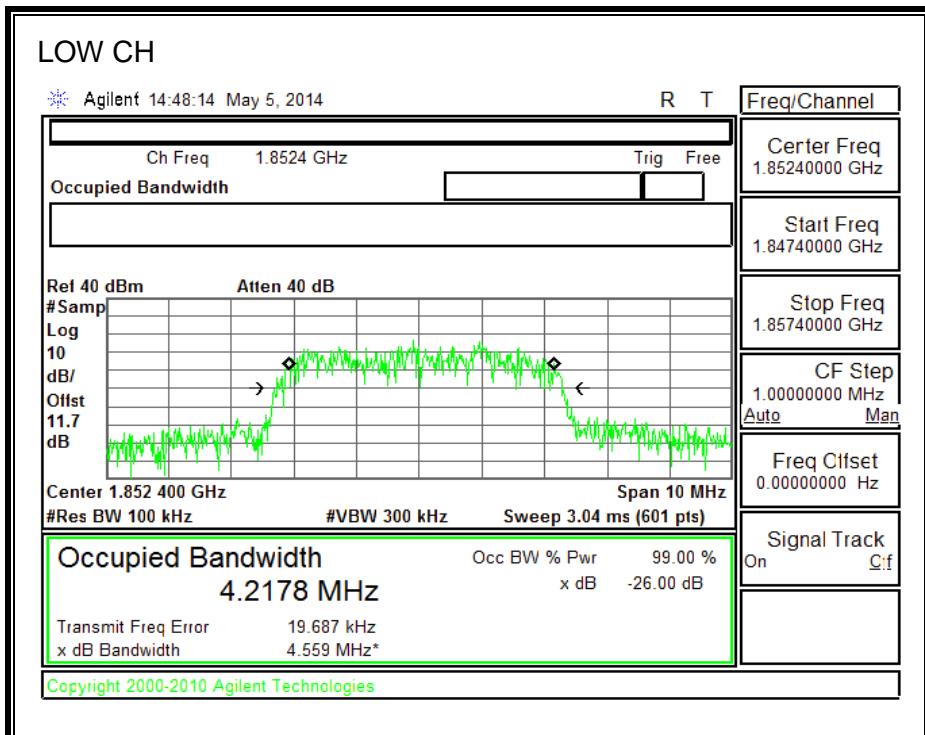

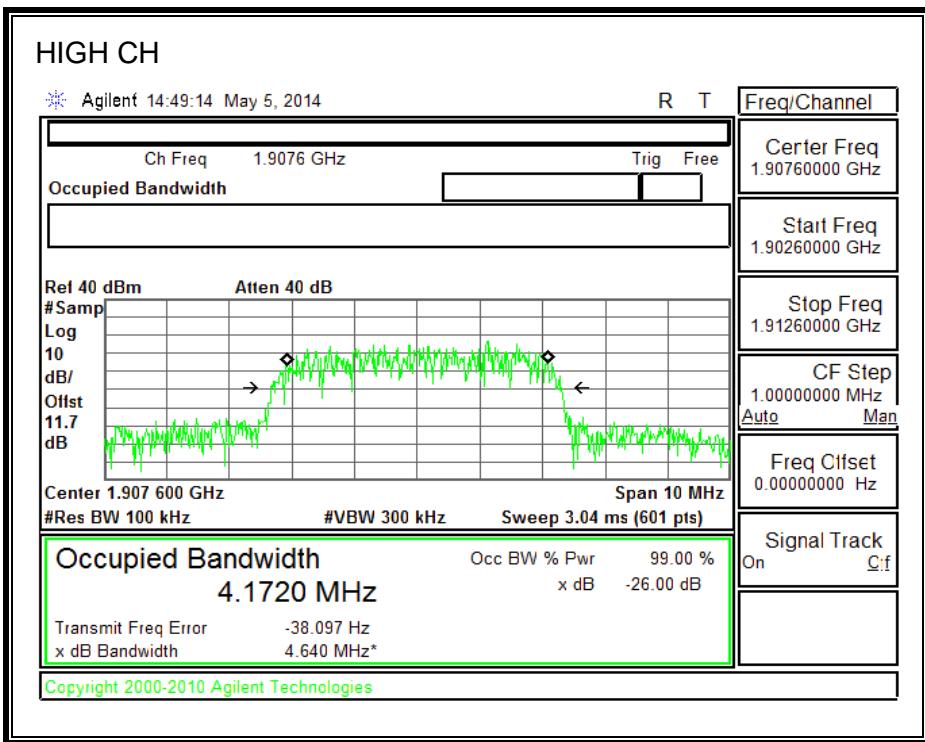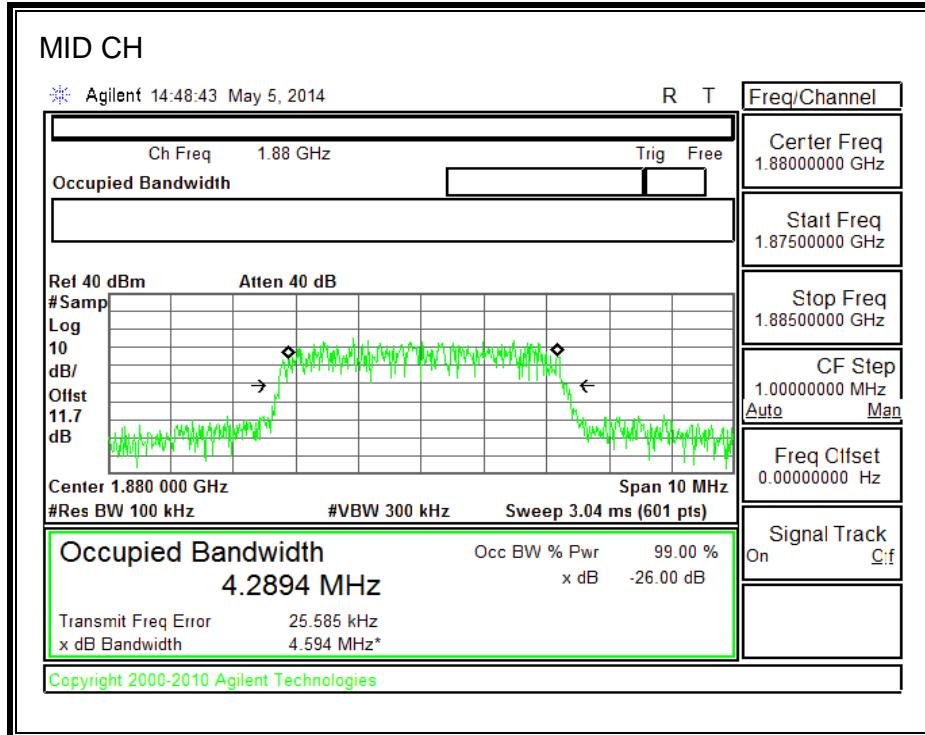



1700MHz BAND

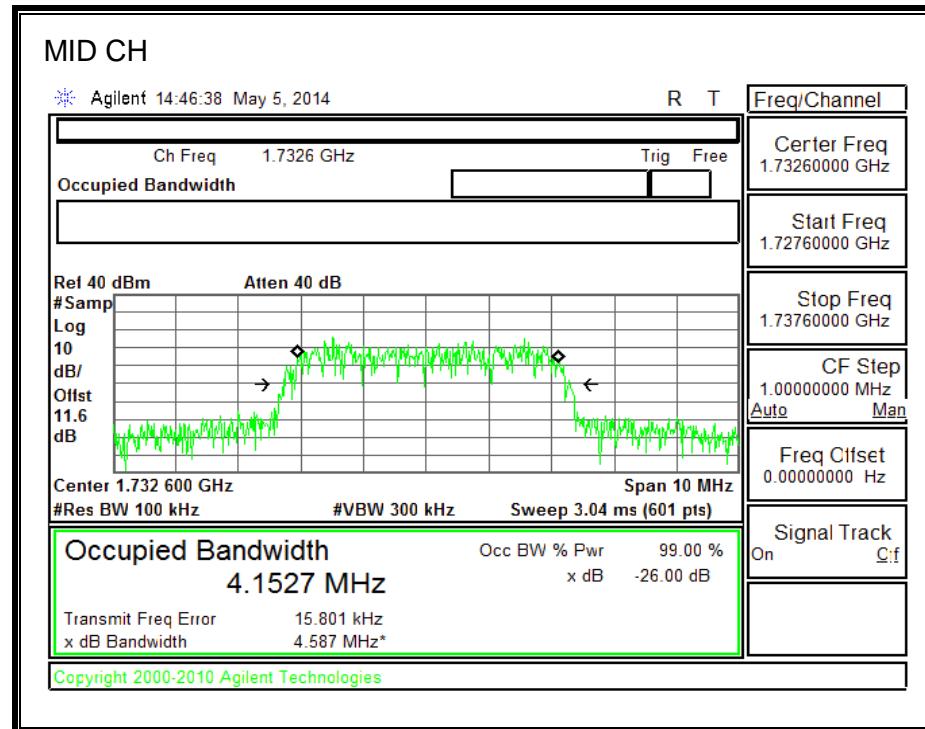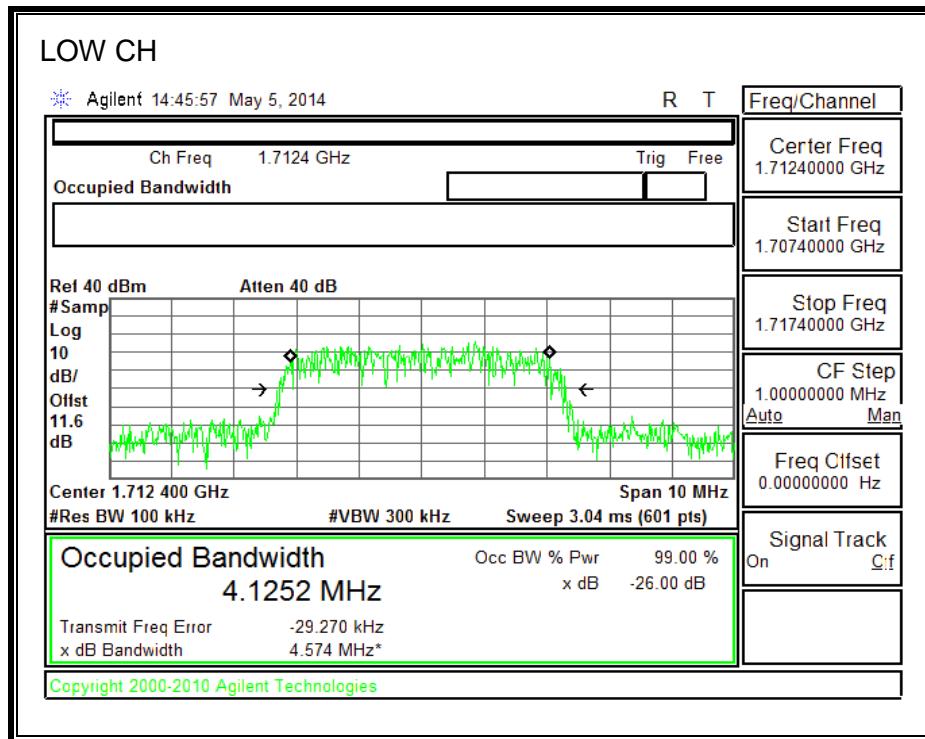


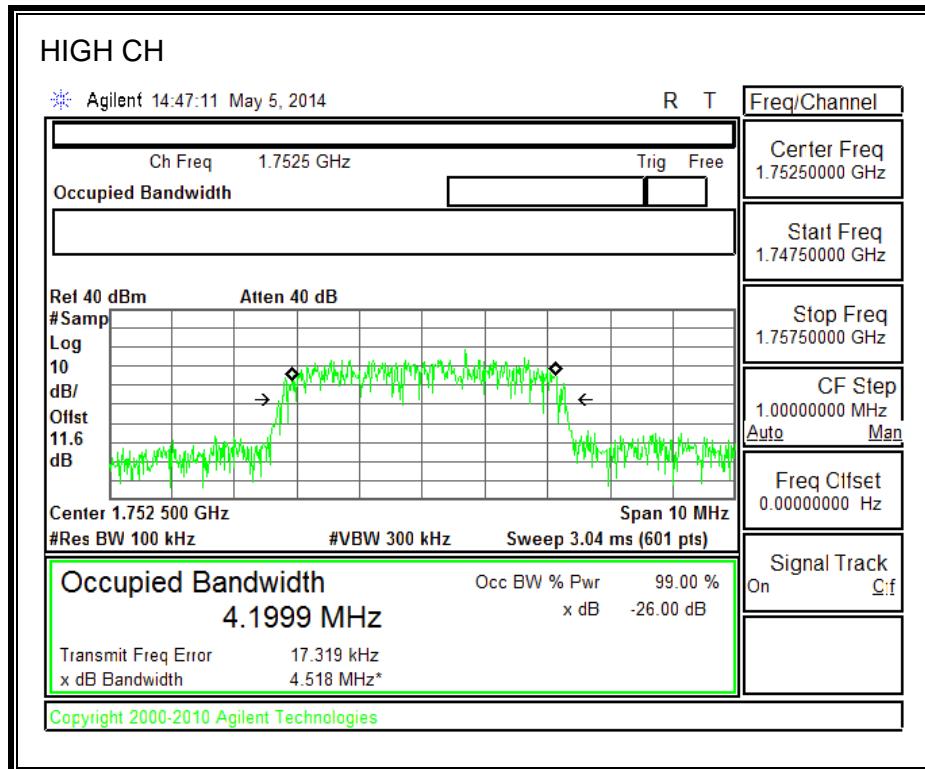


8.1.4. UMTS HSDPA



850MHz BAND

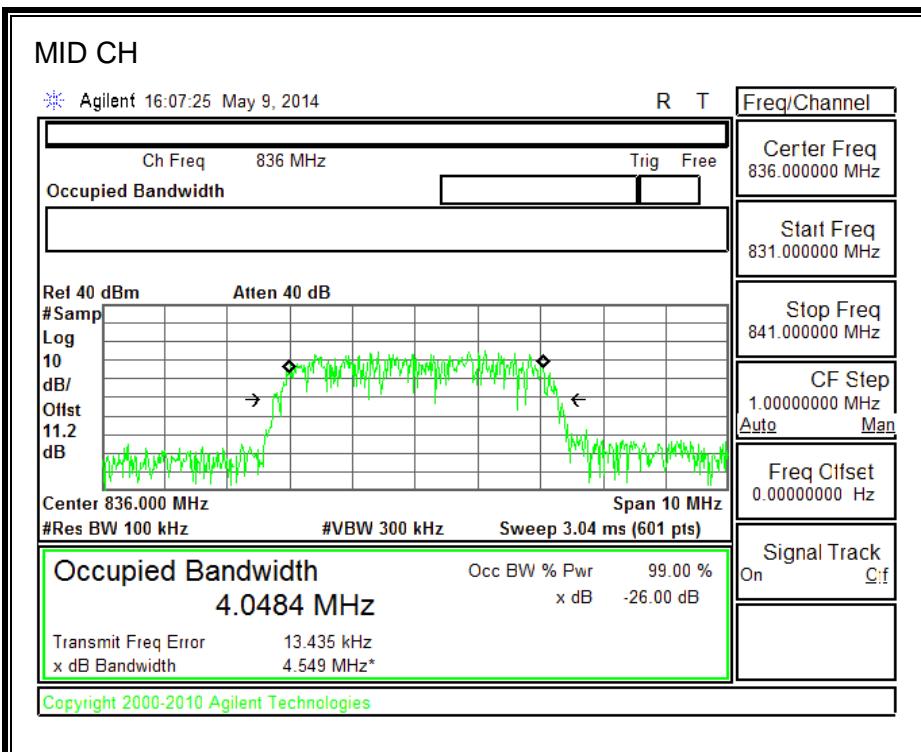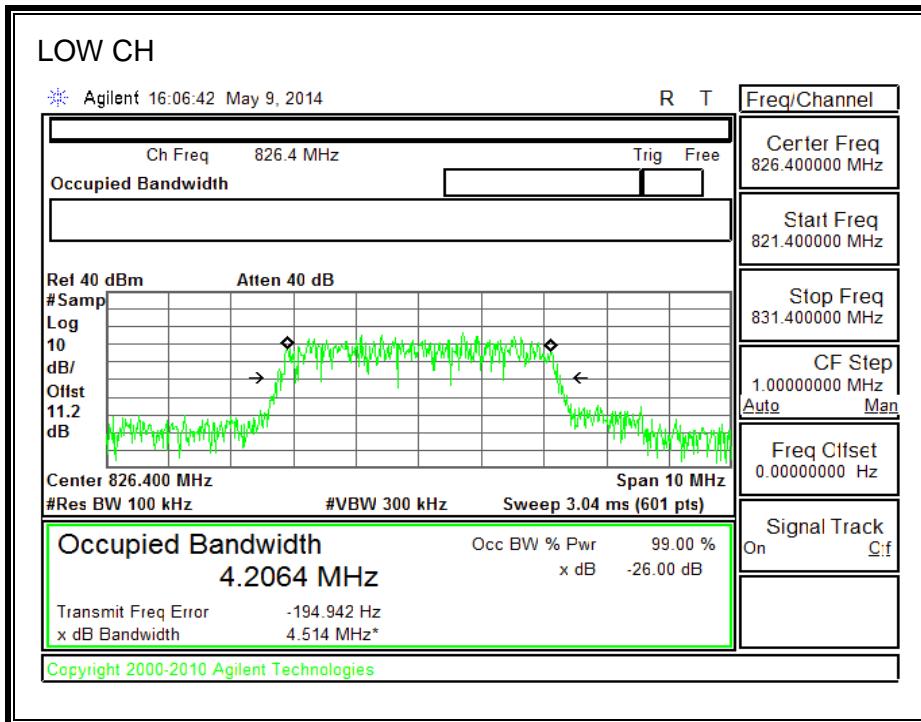


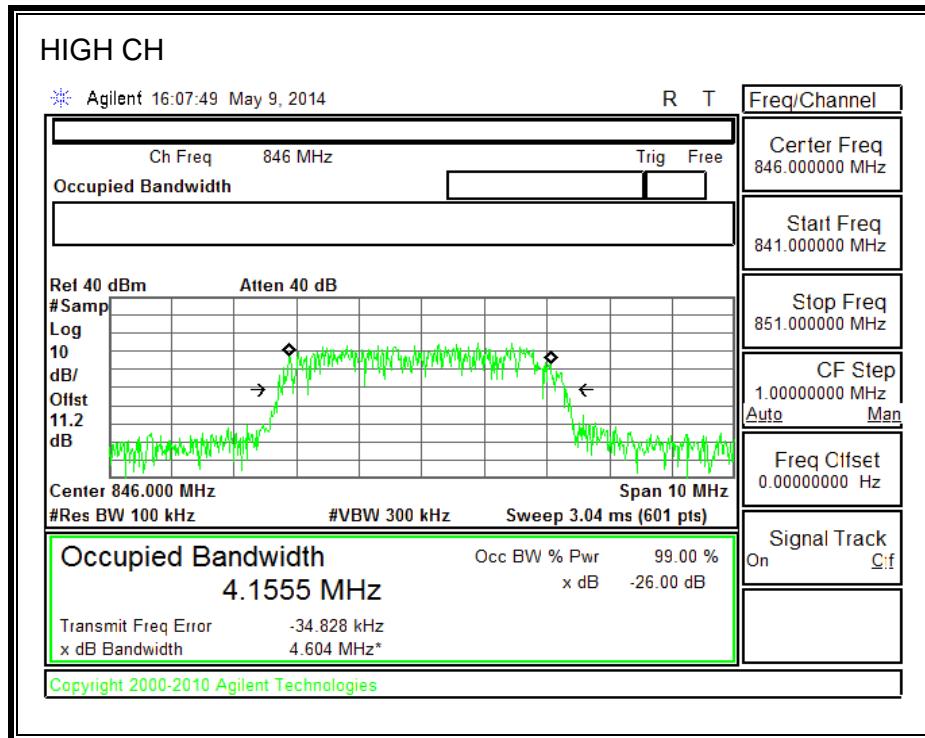



1900MHz BAND

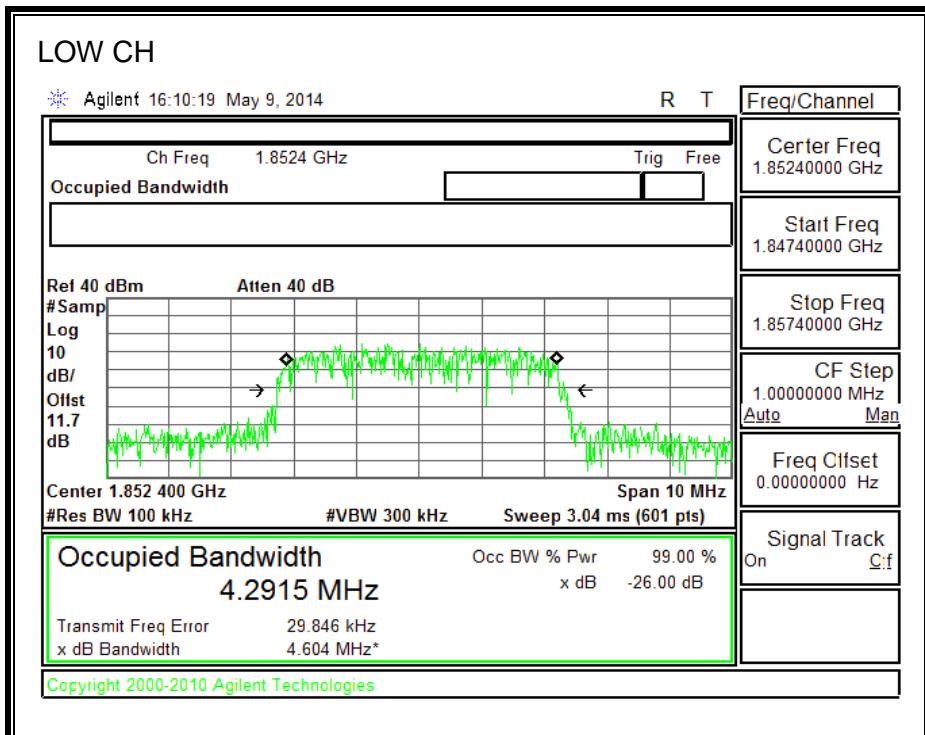

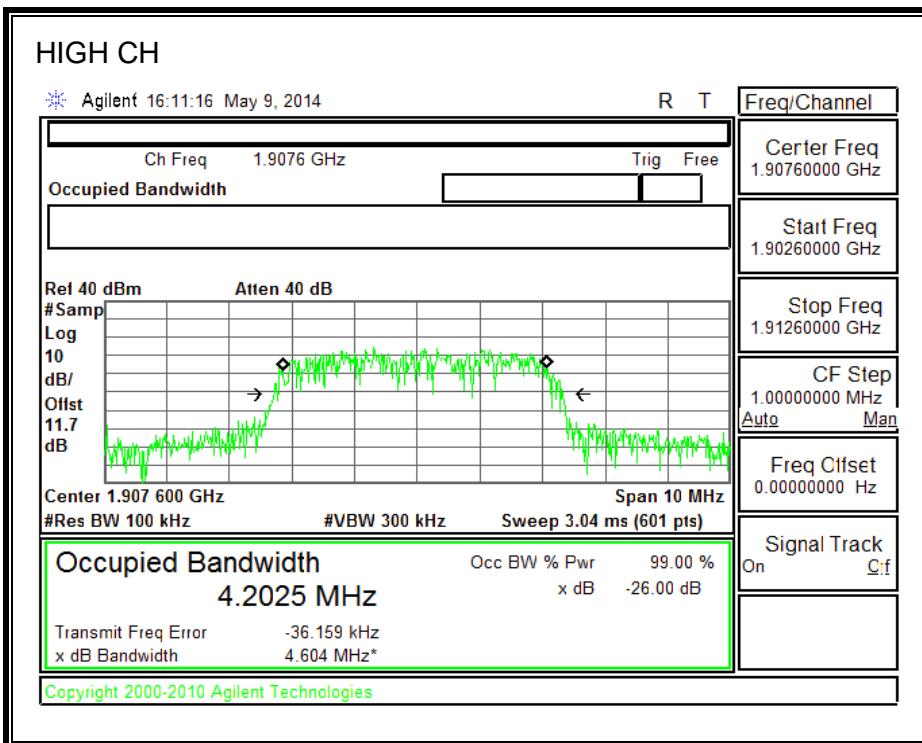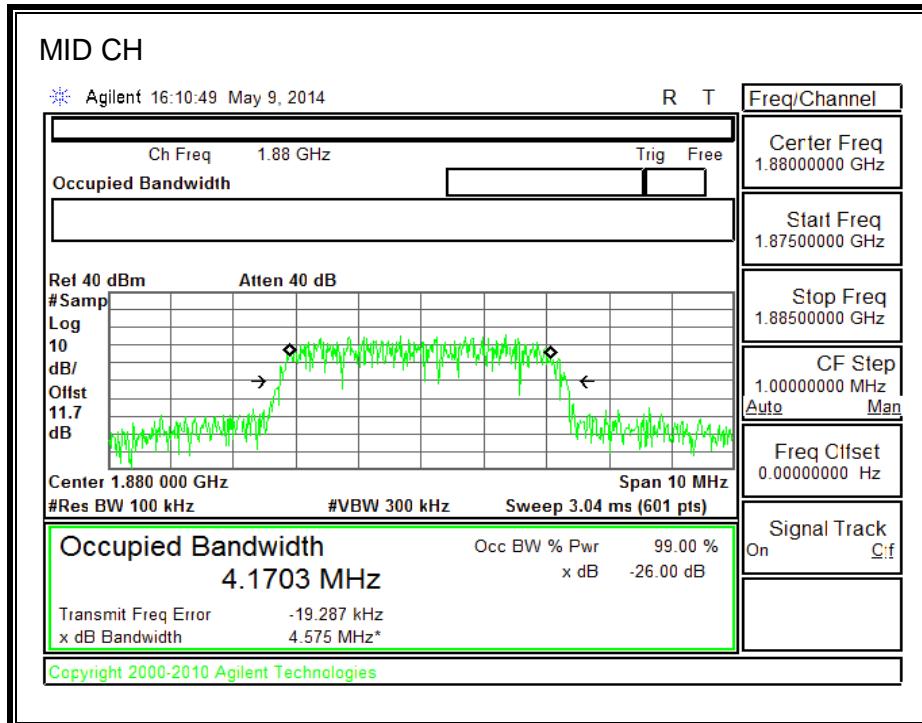



1700MHz BAND

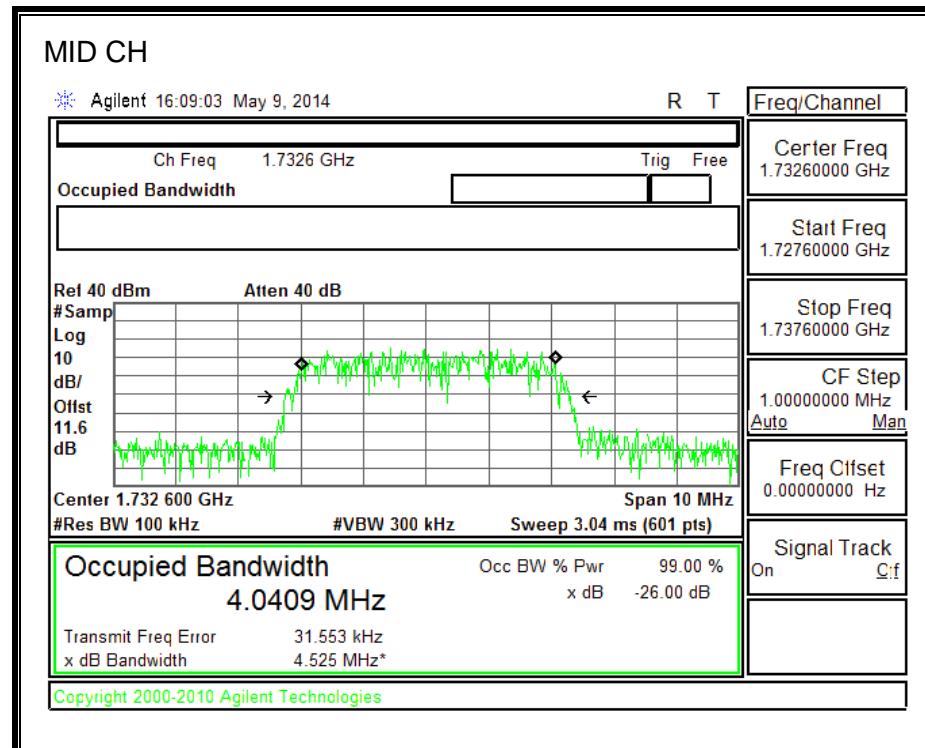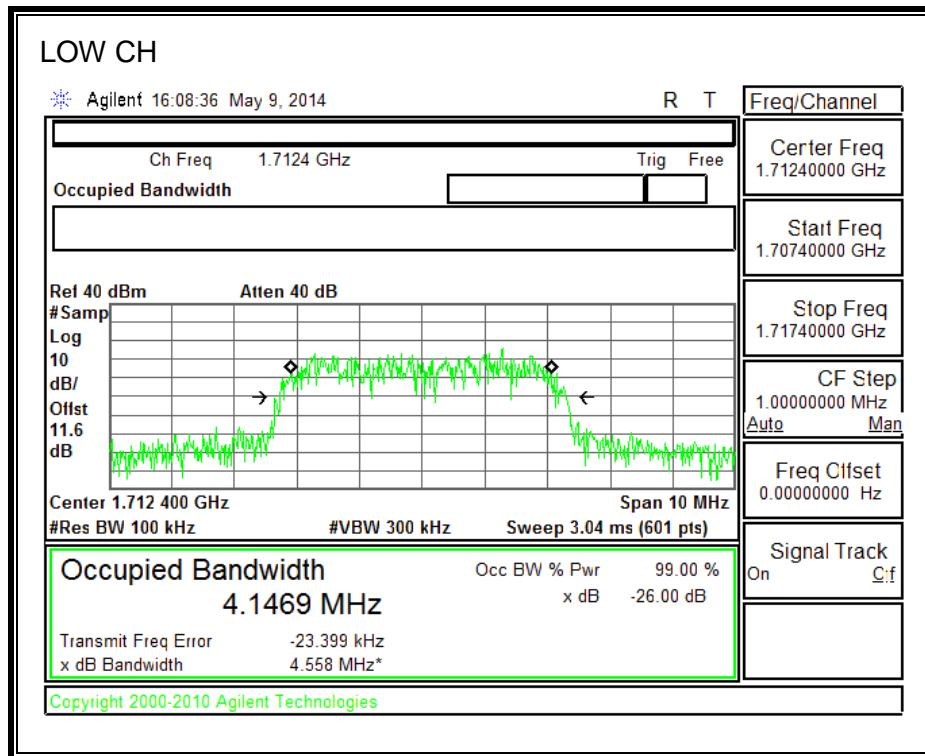


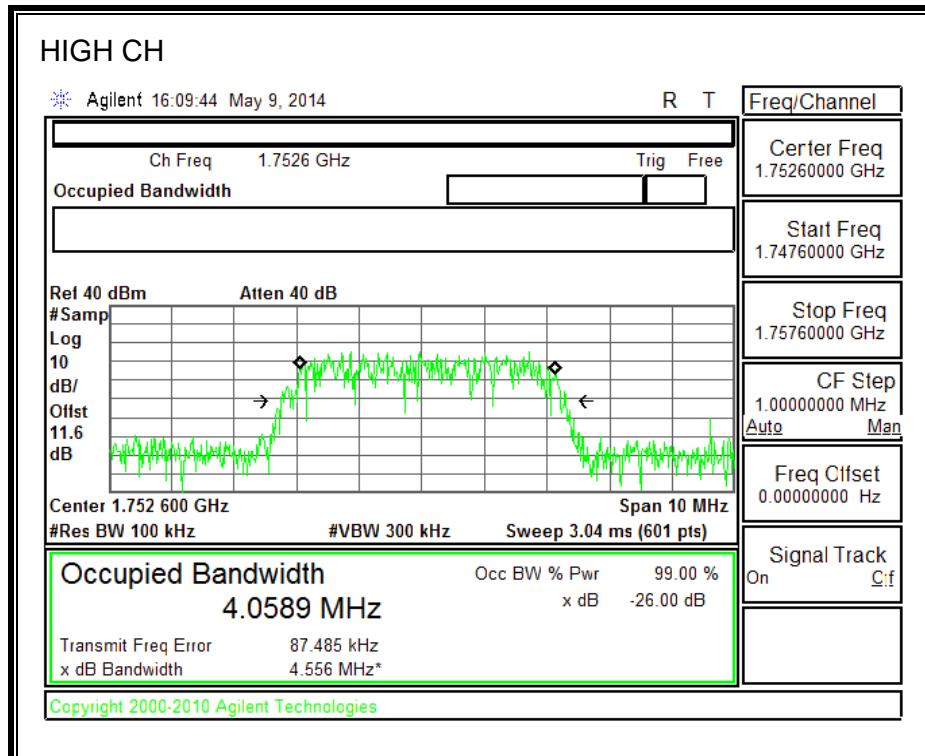


8.1.5. CDMA2000 1xRTT



850MHz BAND

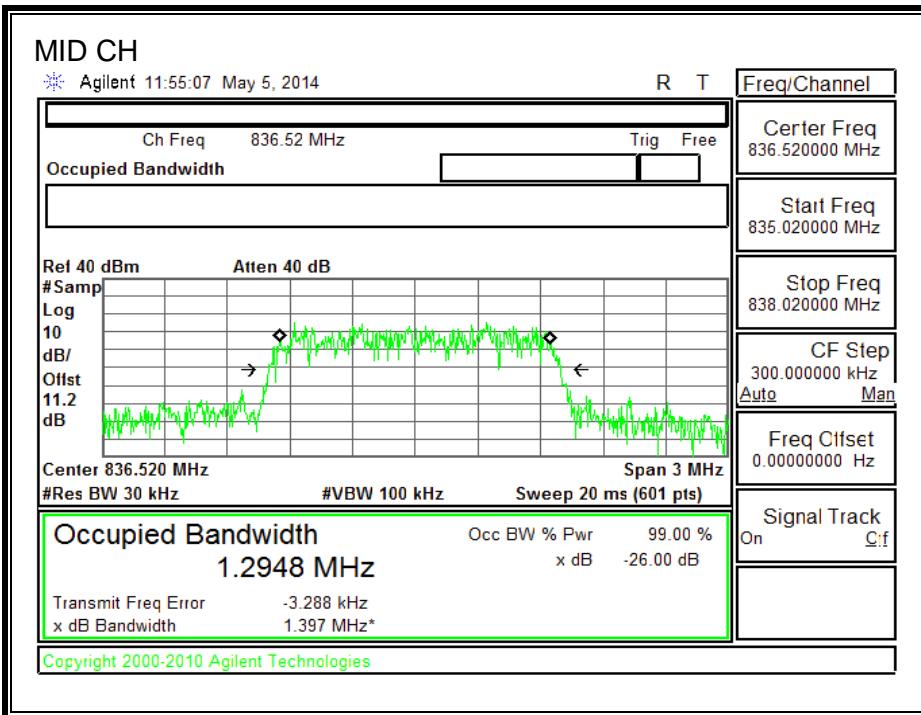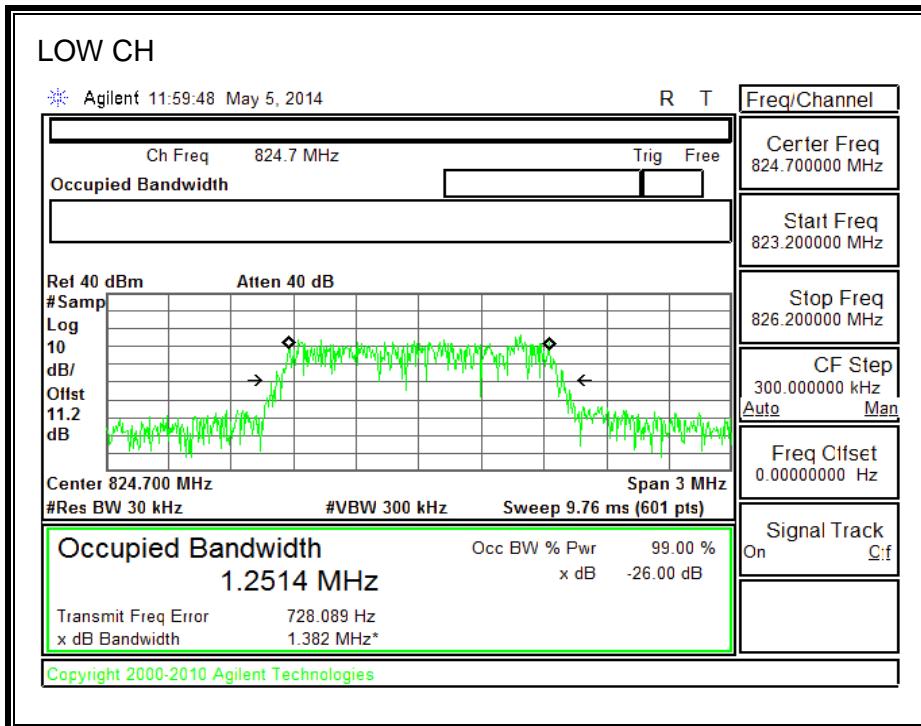


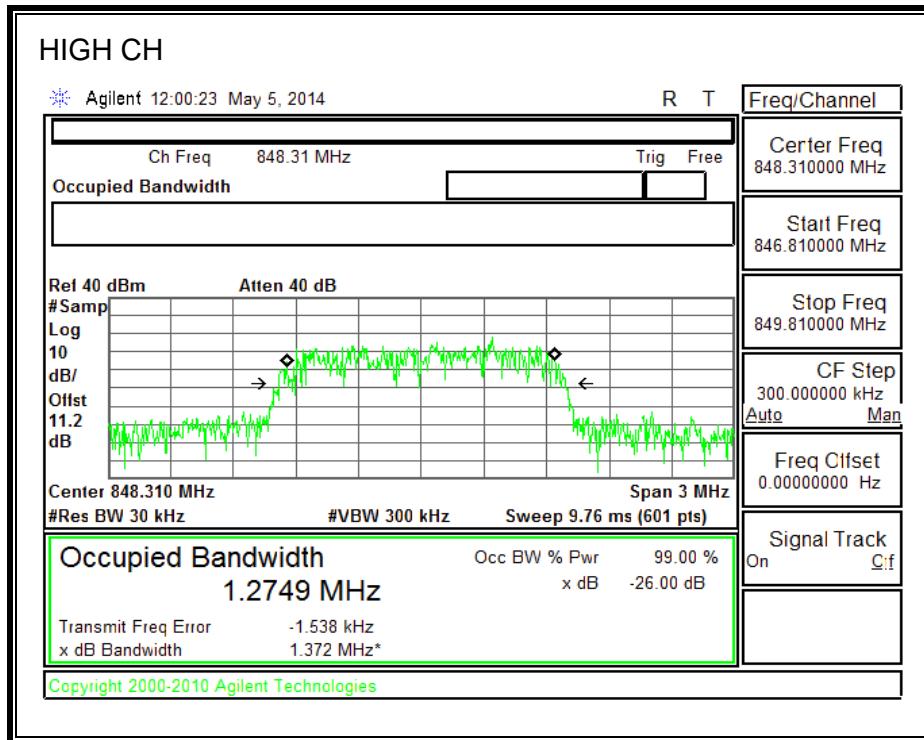



1900MHz BAND

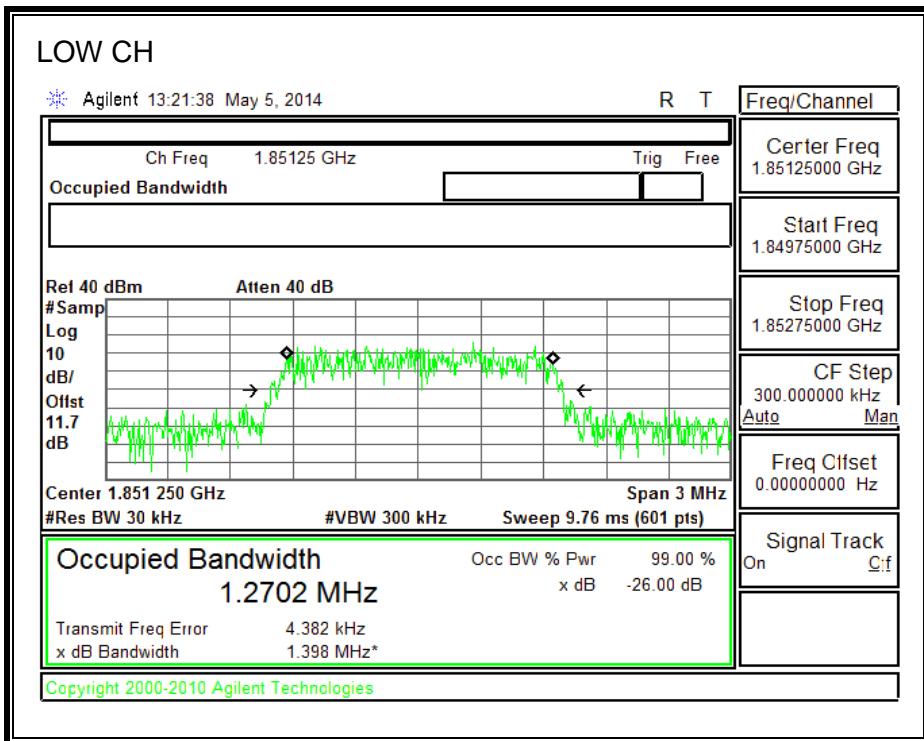

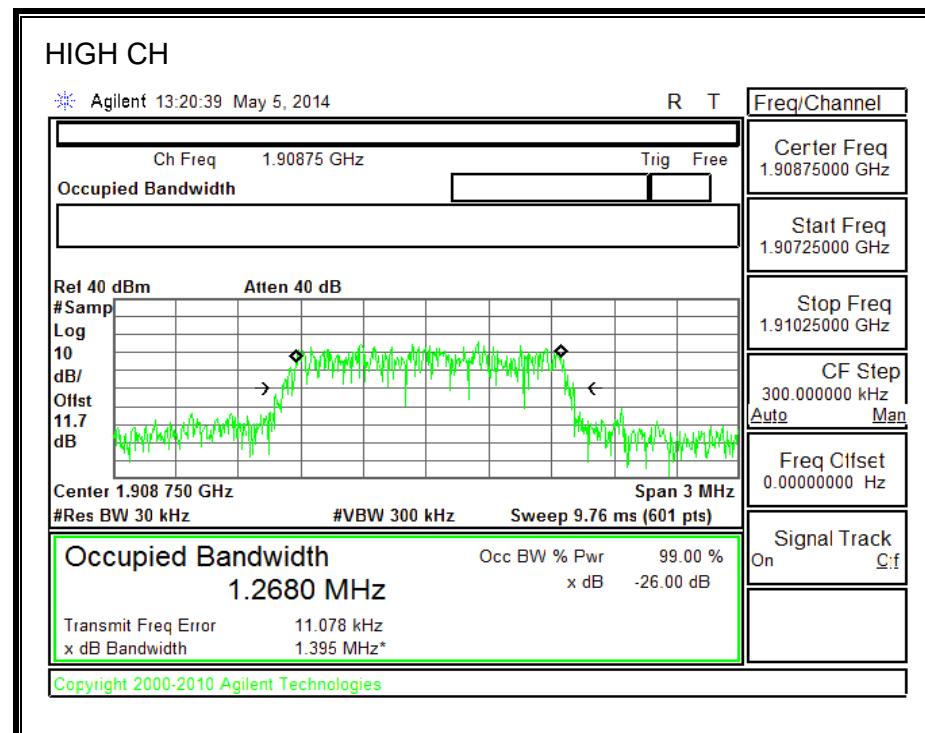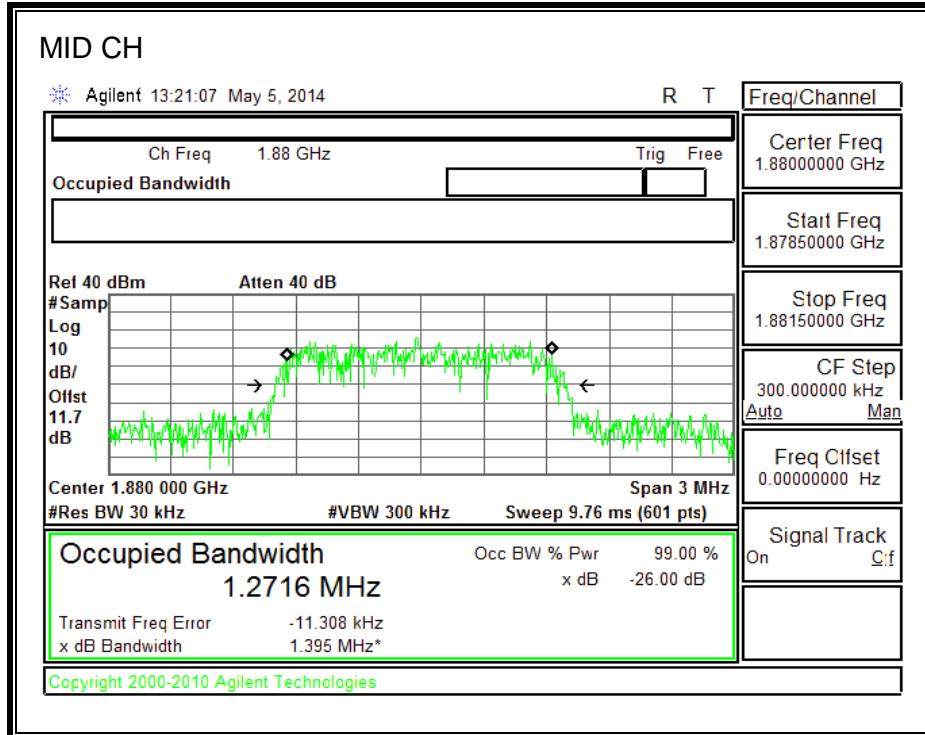




1700MHz BAND

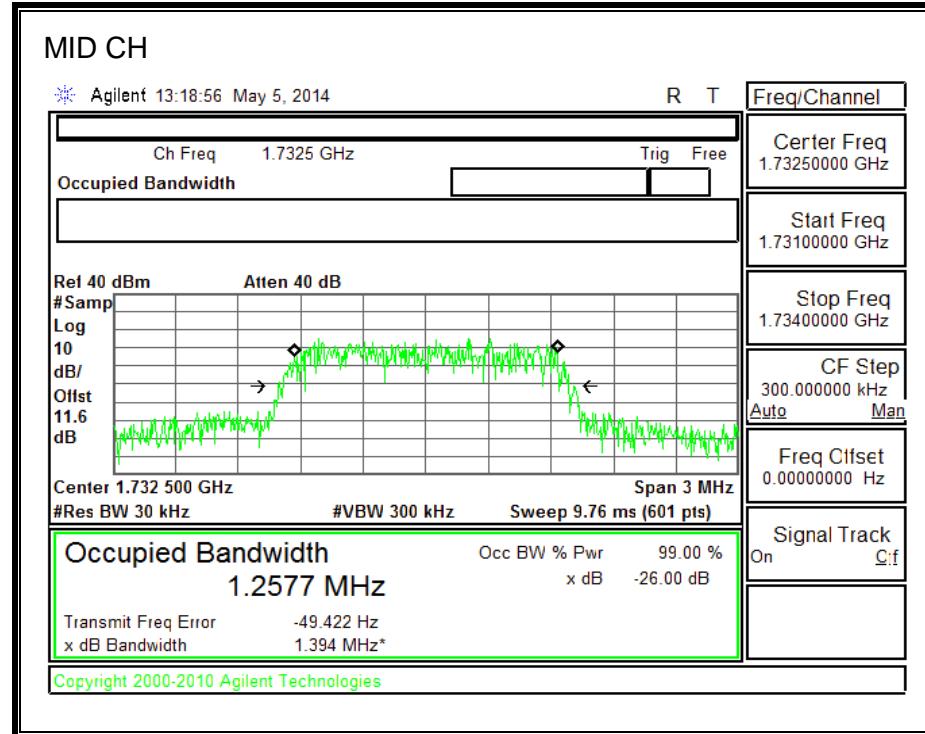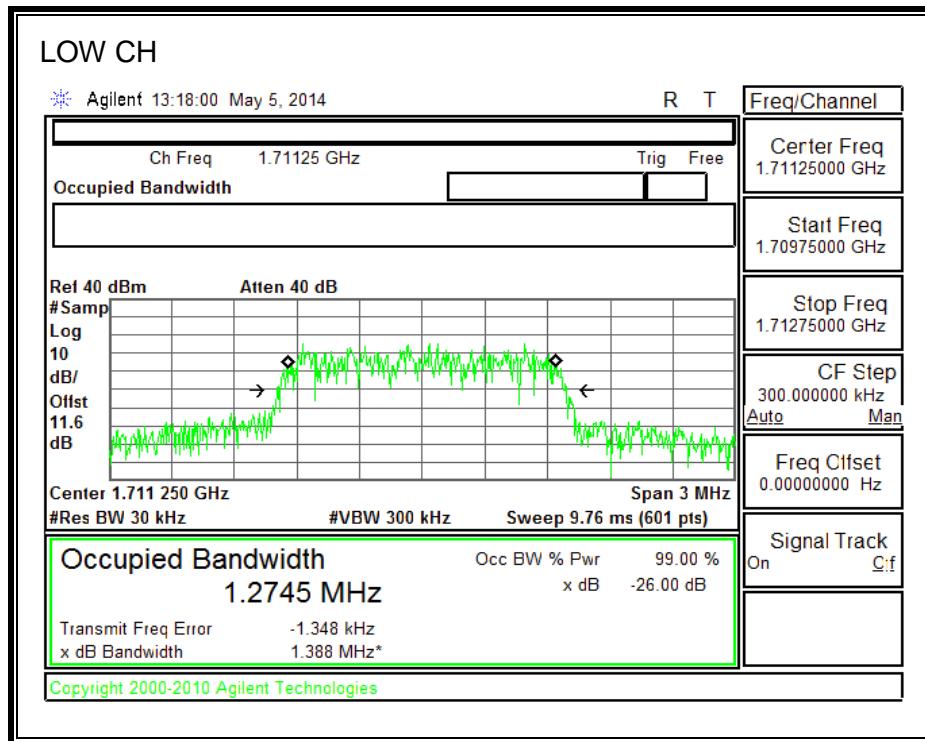

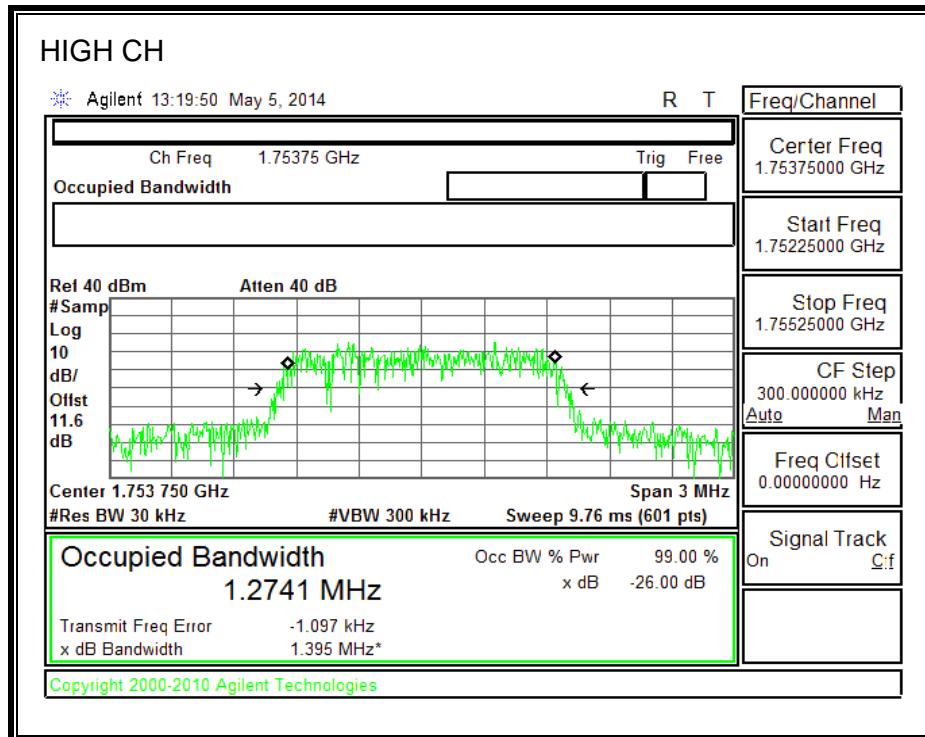



800MHz SECONDARY BAND

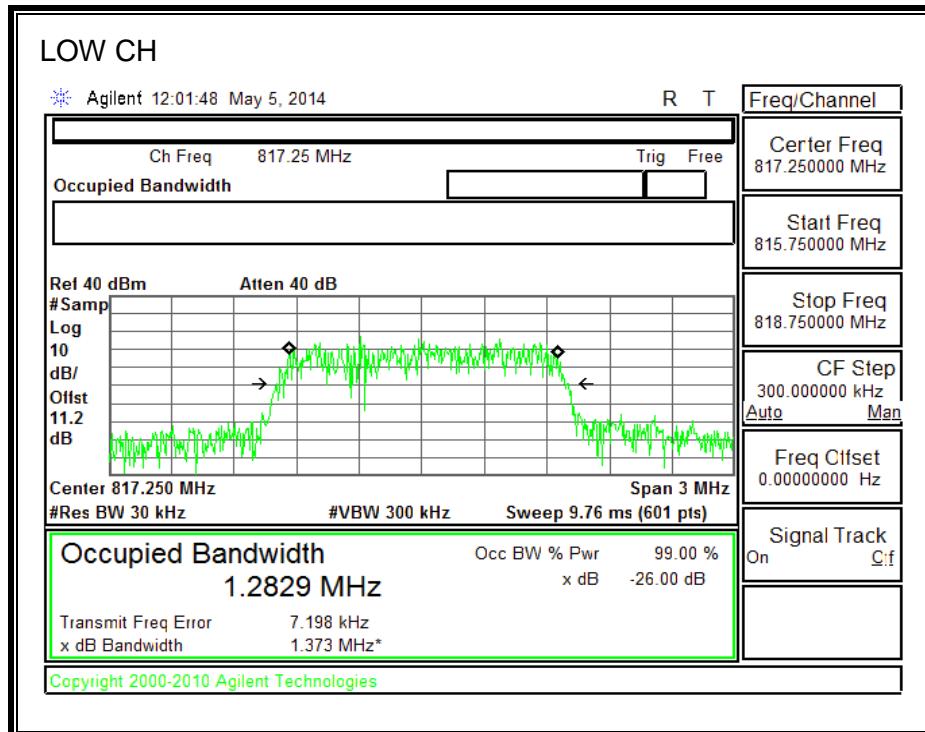


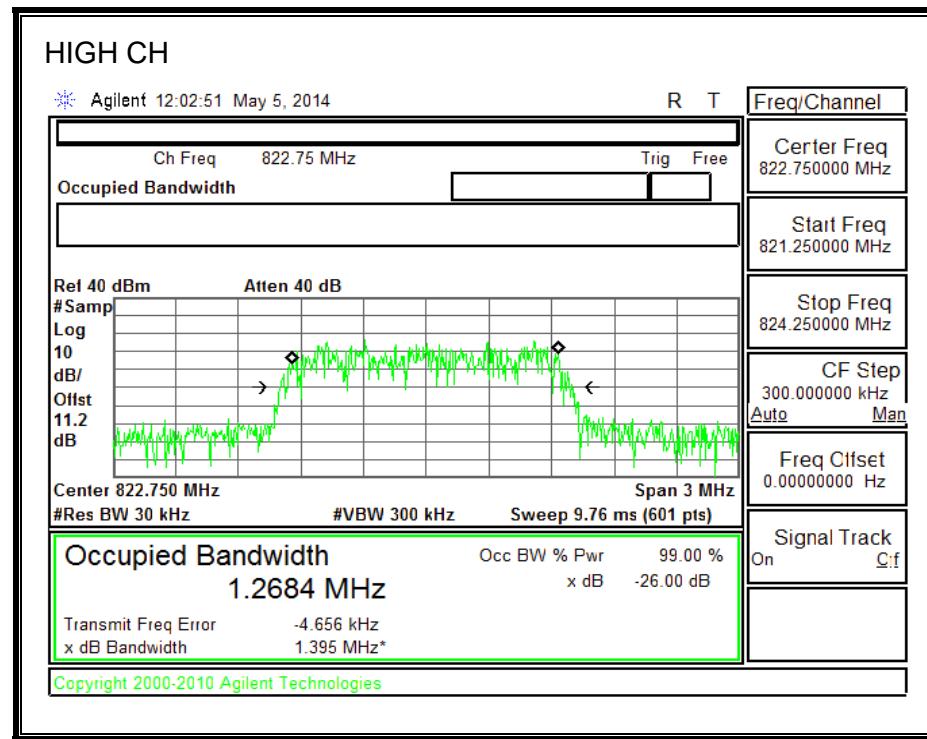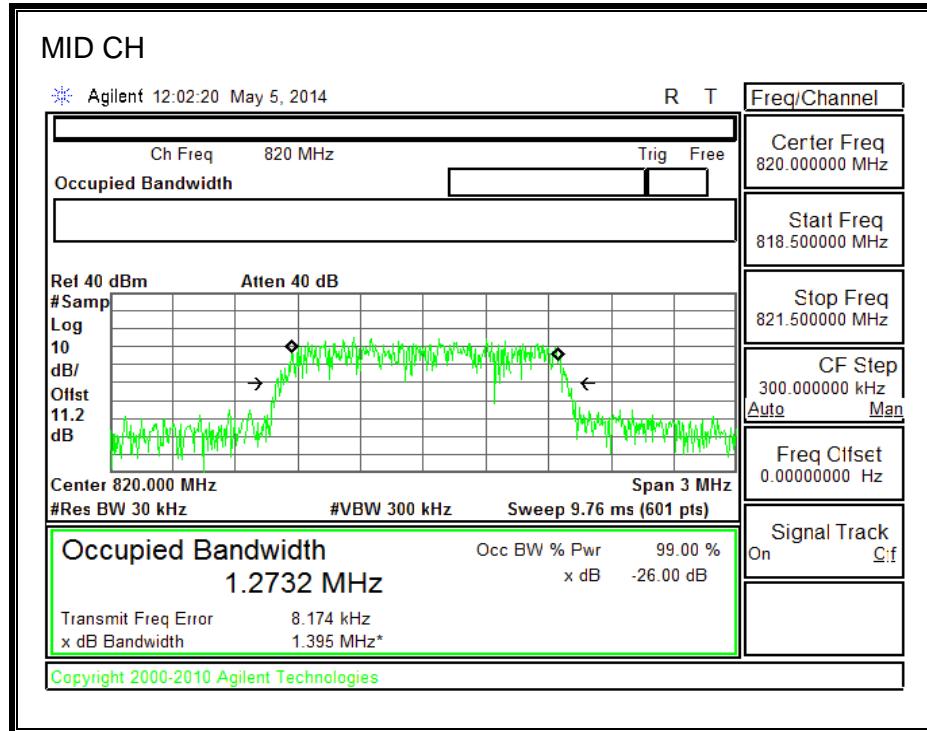


8.1.6. CDMA2000 EVDO Rev. A



850MHz BAND

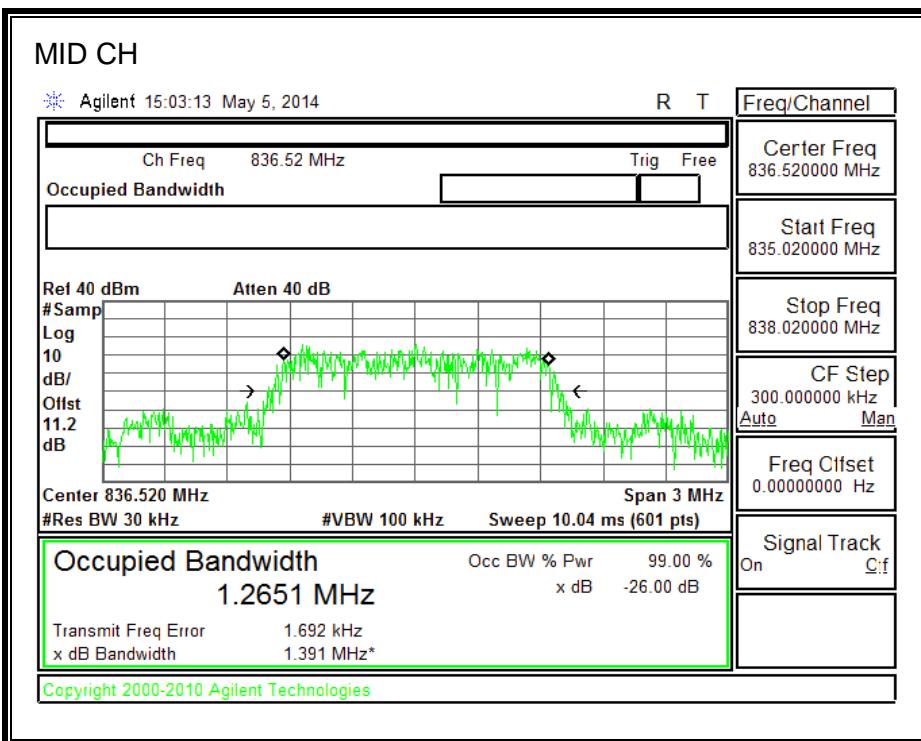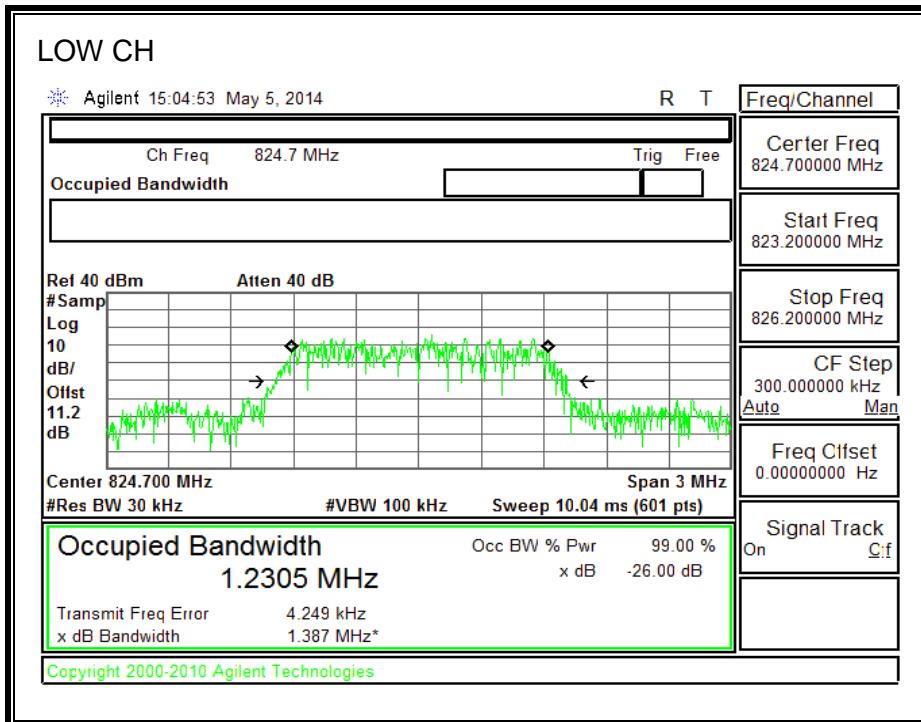


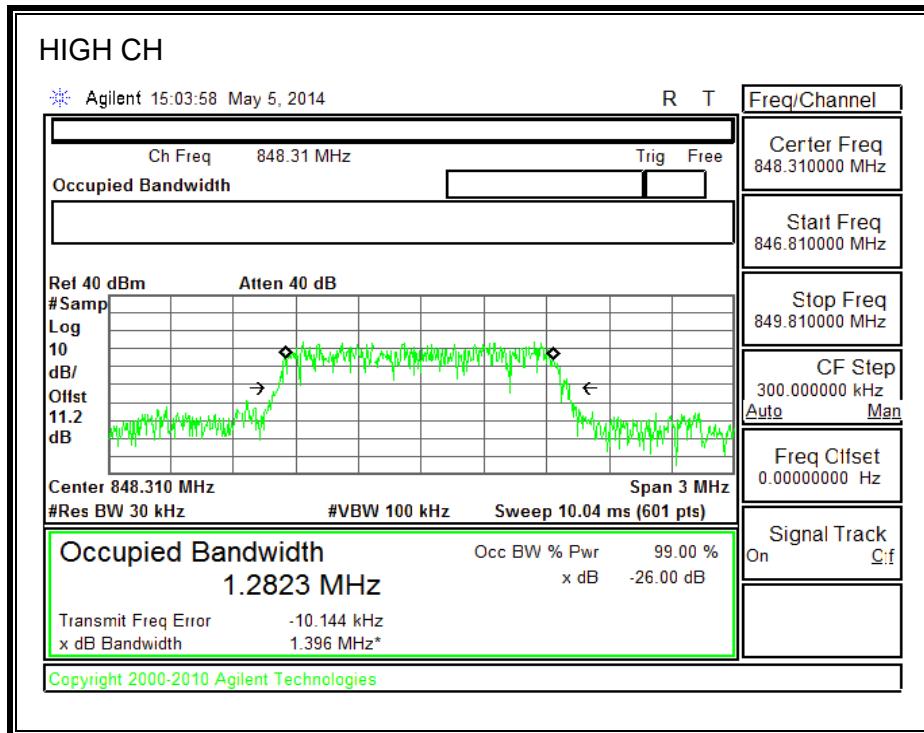



1900MHz BAND

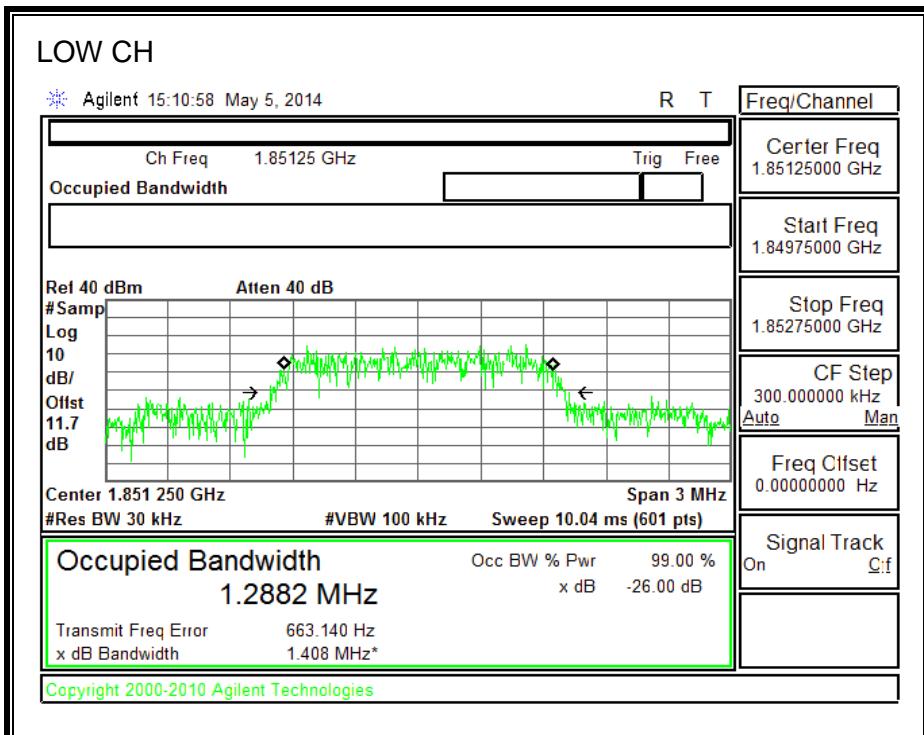

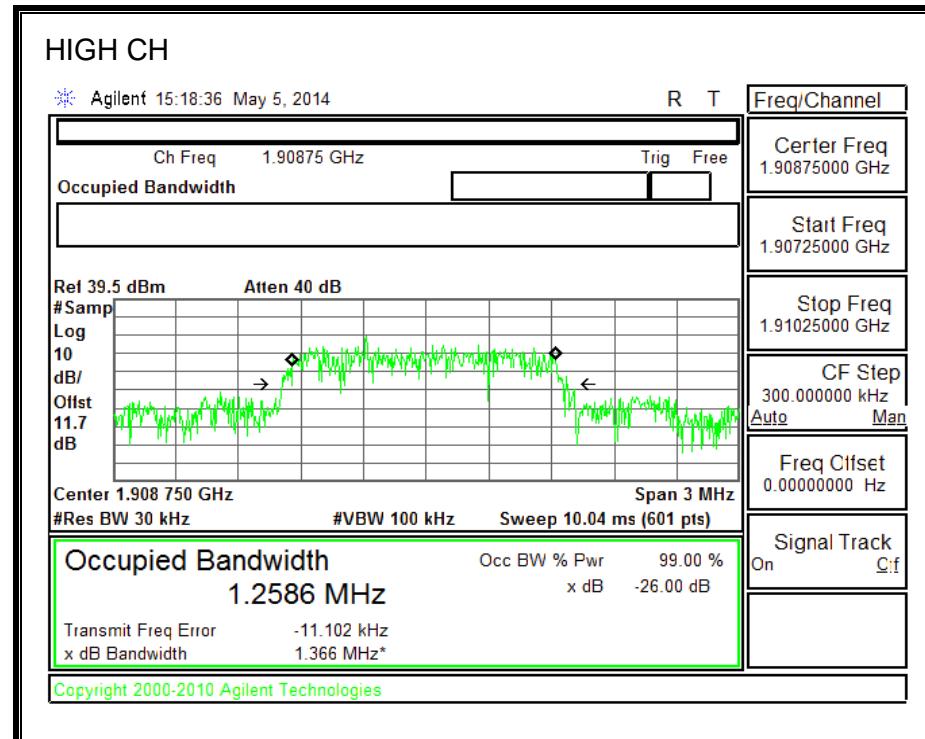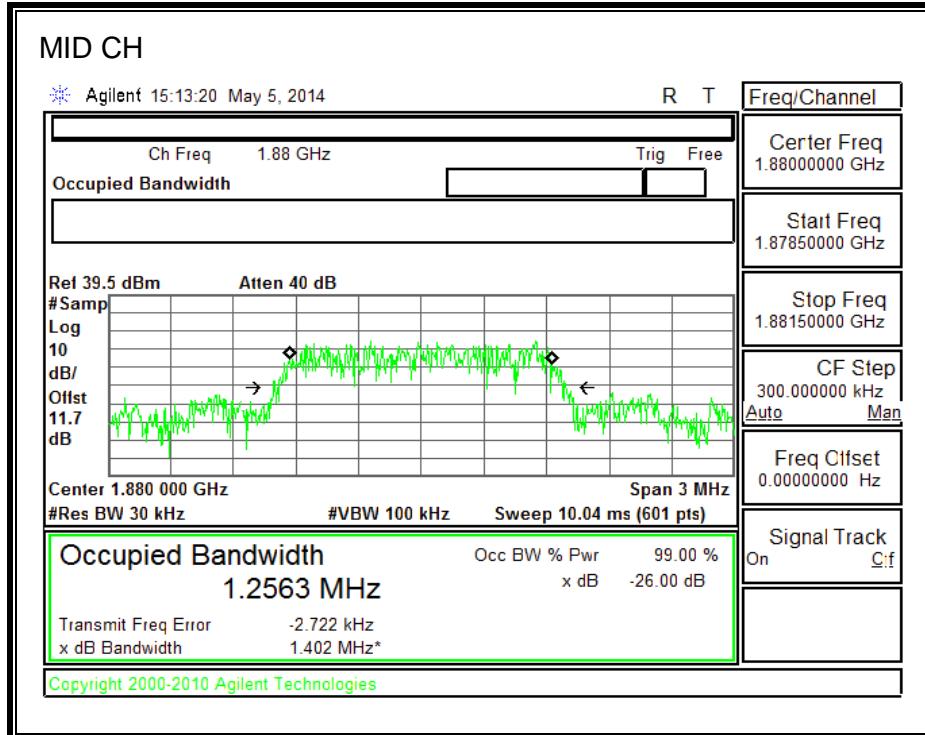




1700MHz BAND

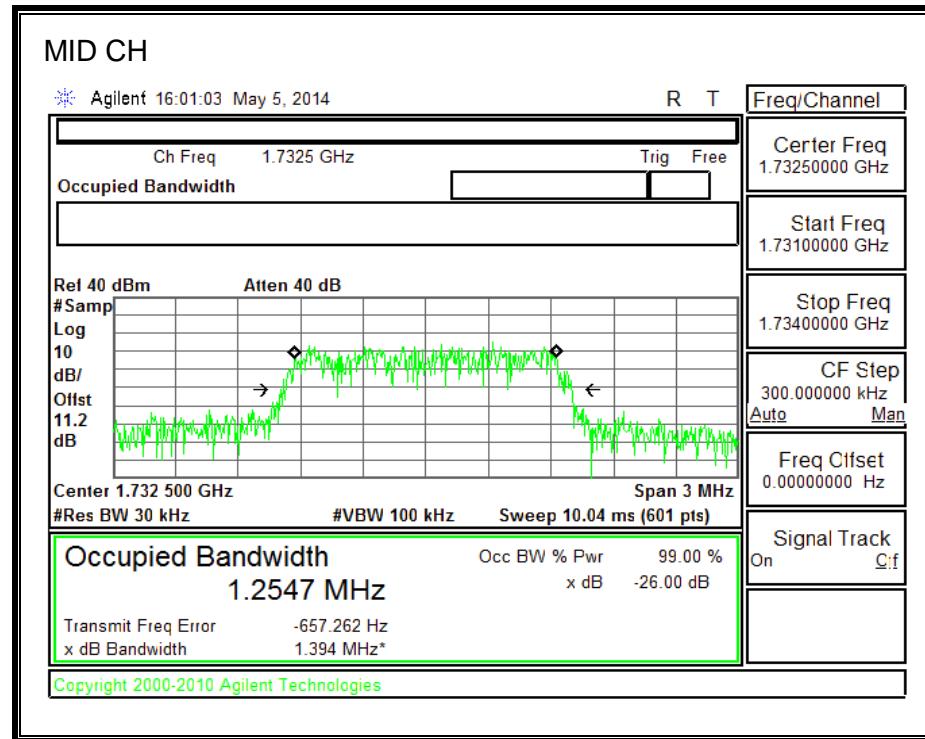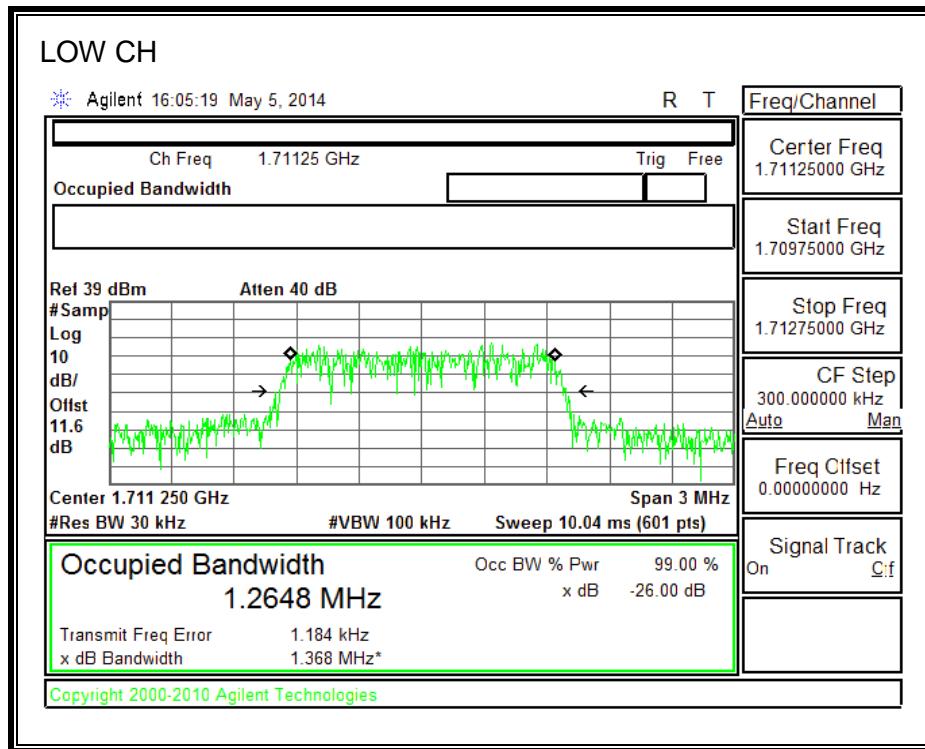

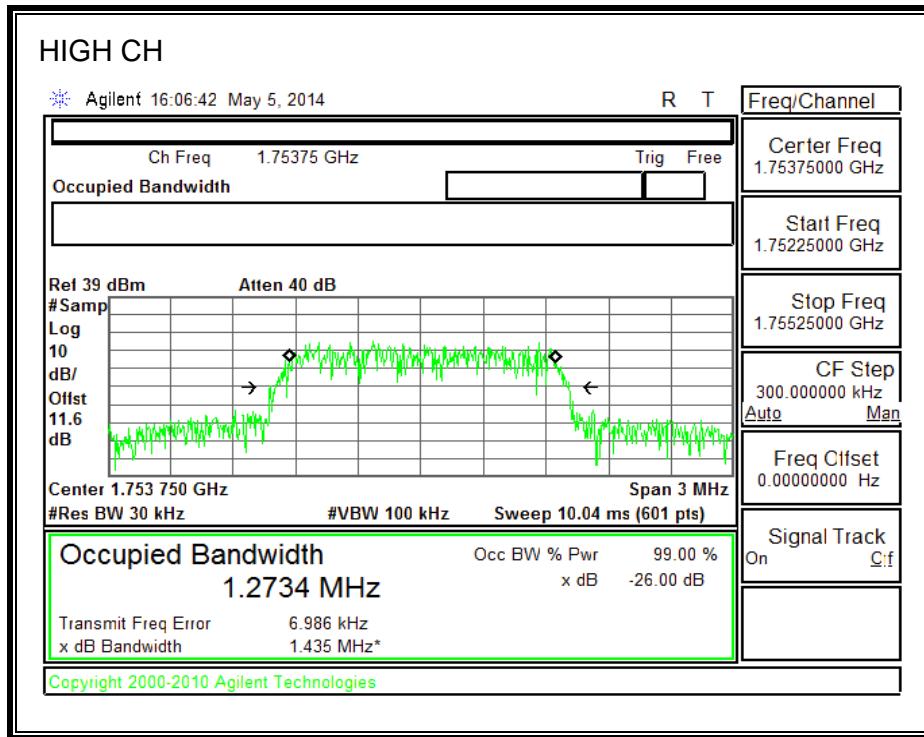



800MHz SECONDARY BAND

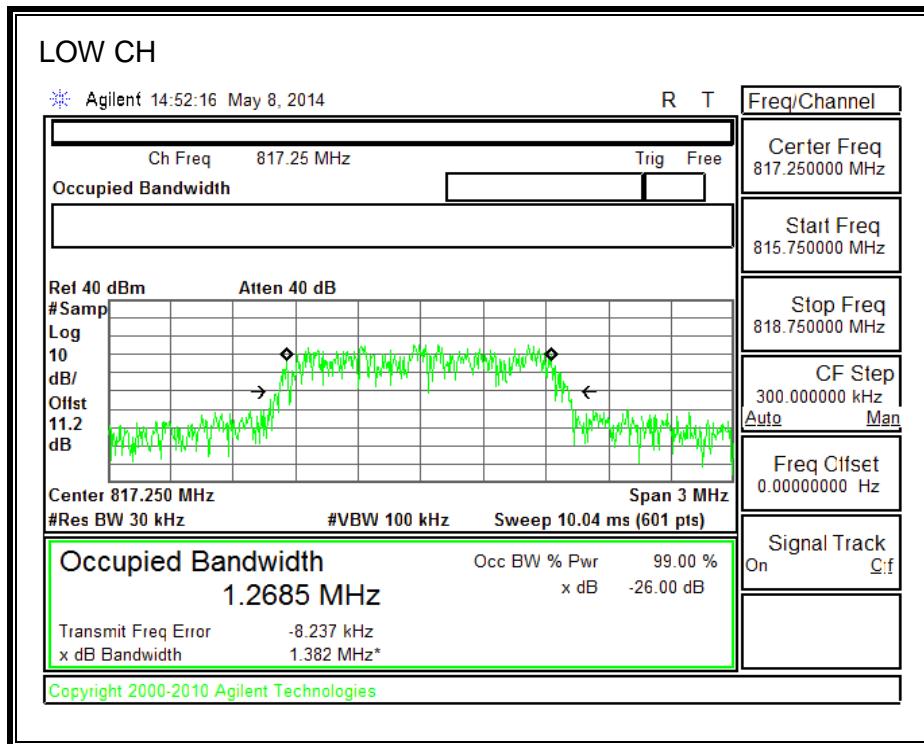


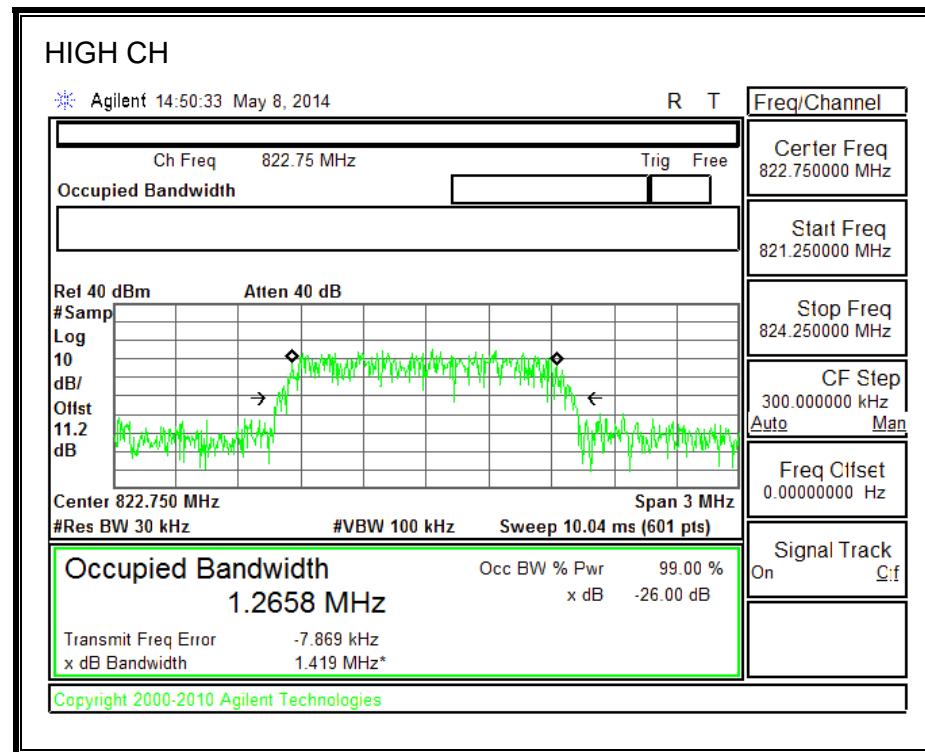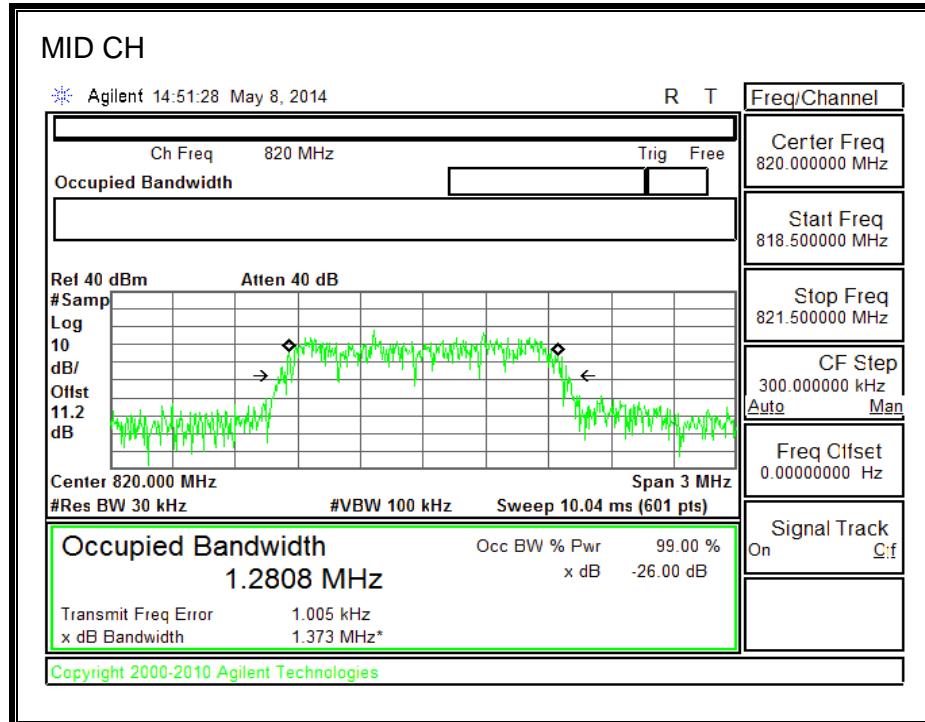


8.1.7. CDMA2000 EVDO Rev. B



2 CARRIER MIN

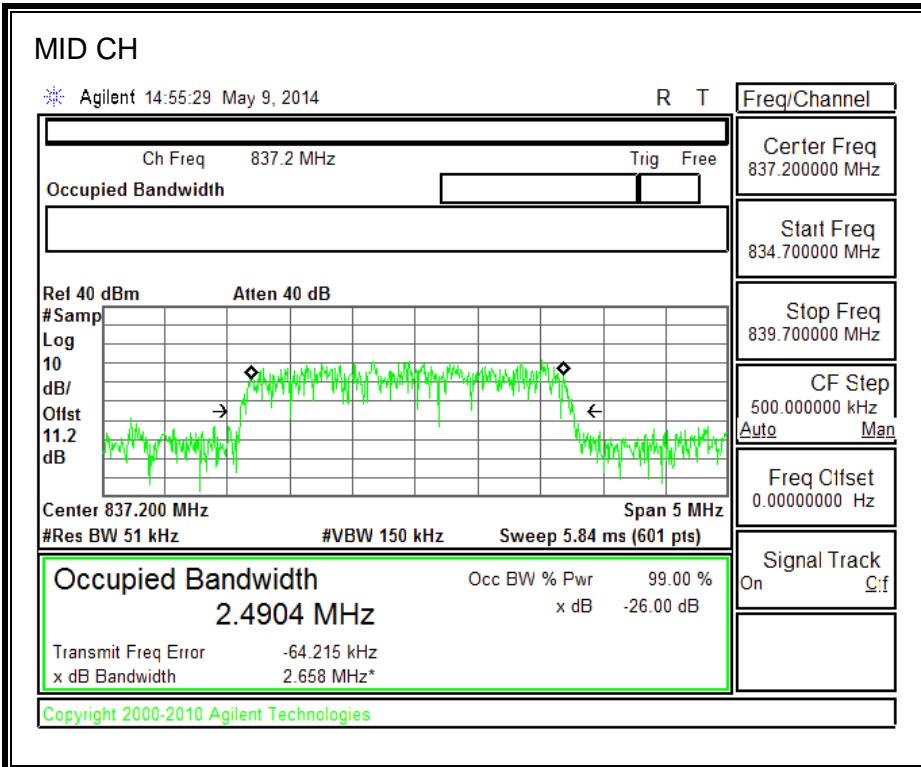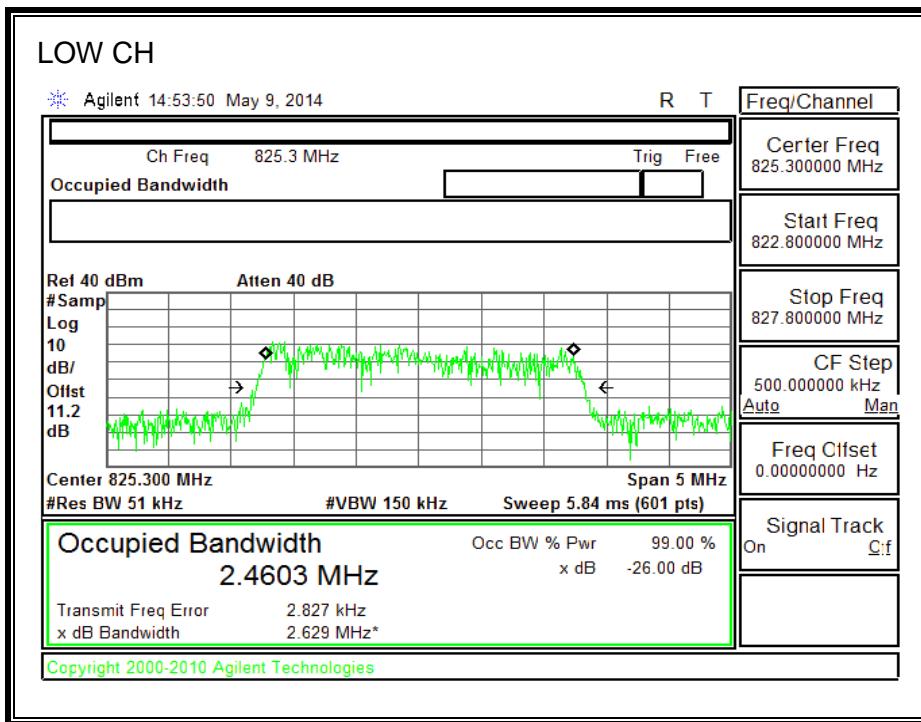


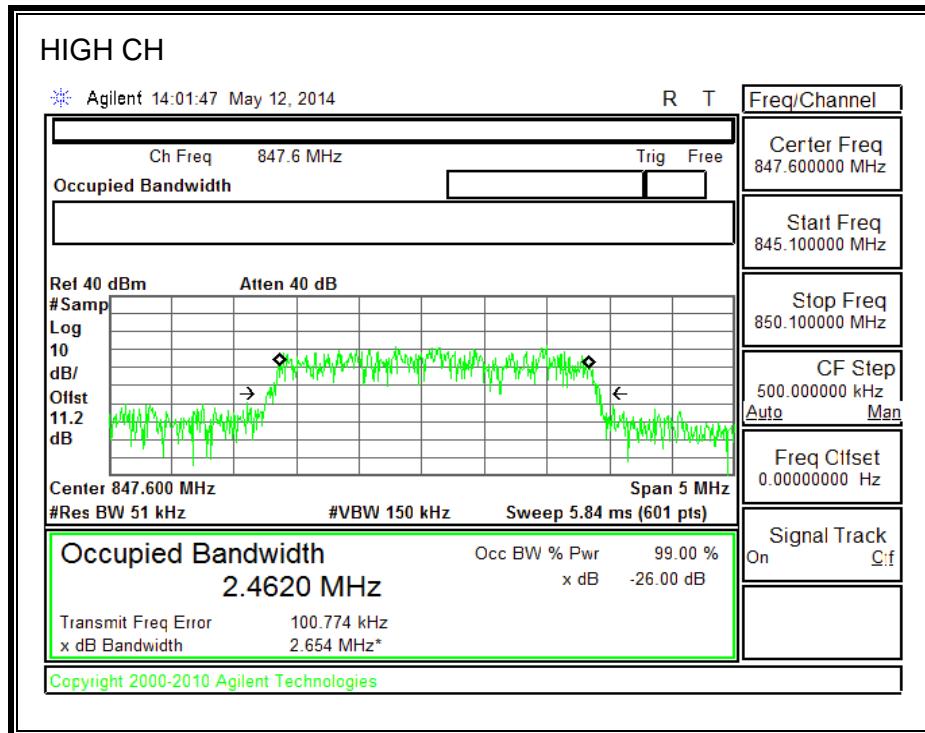



2 CARRIER MAX

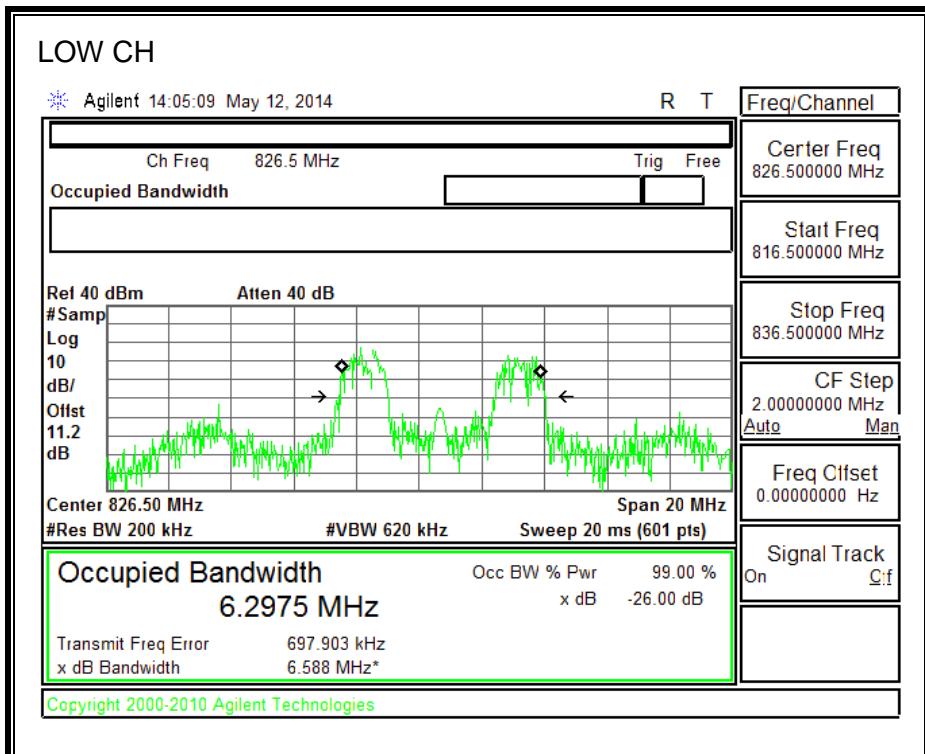

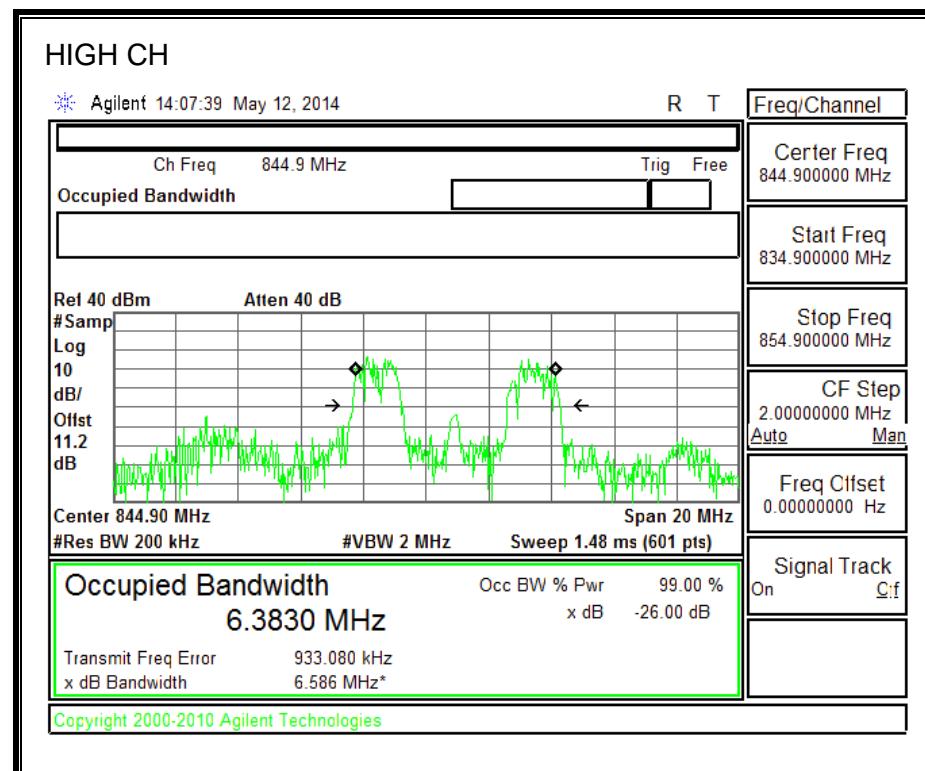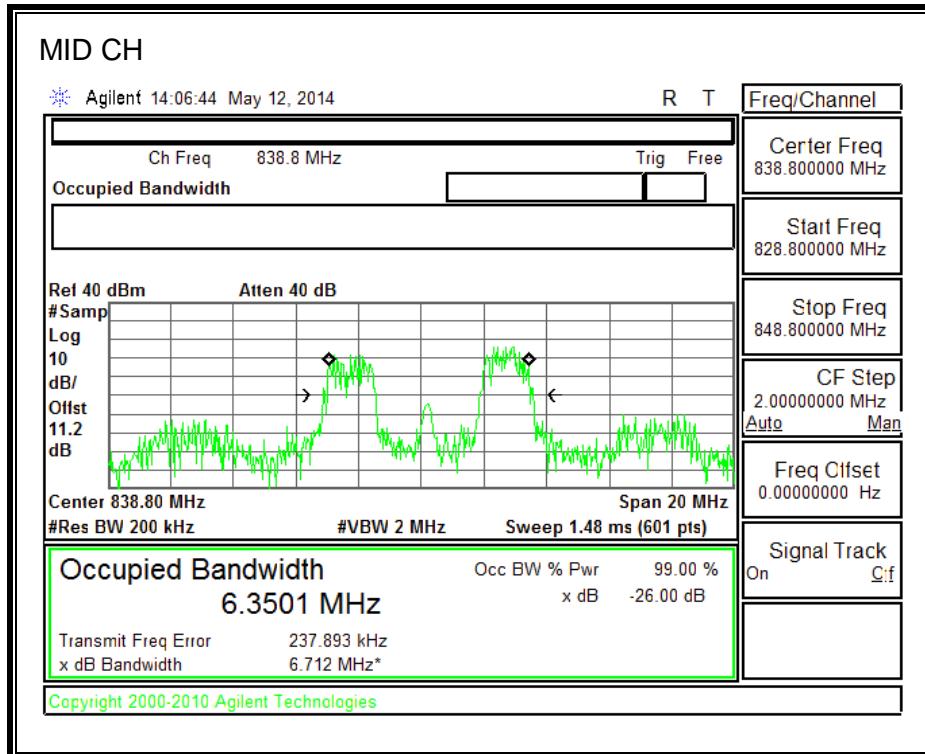

3 CARRIER MIN

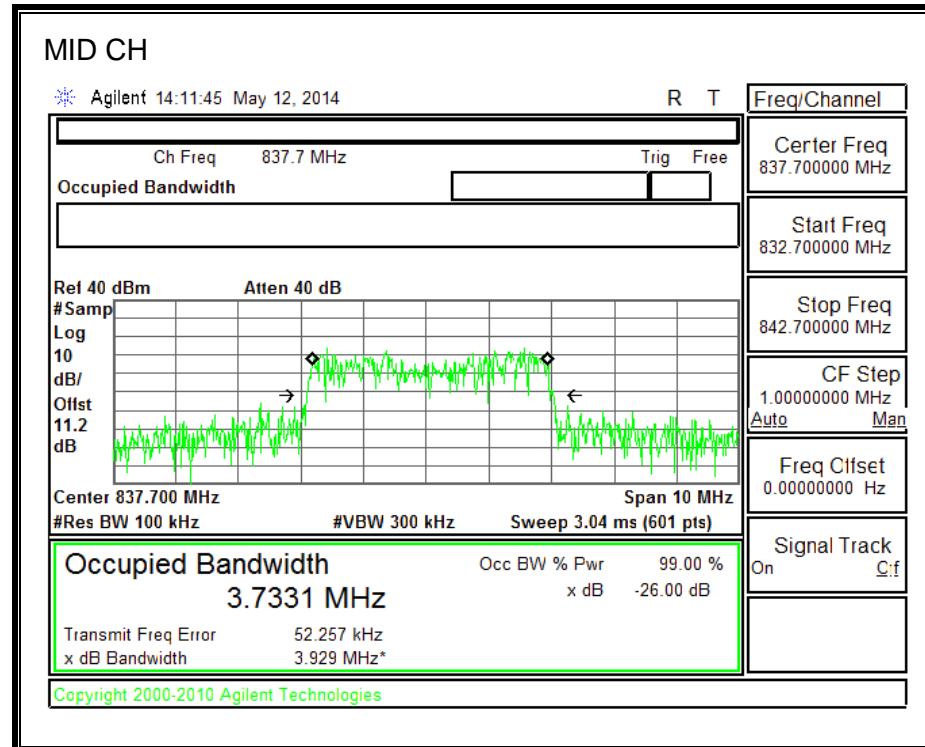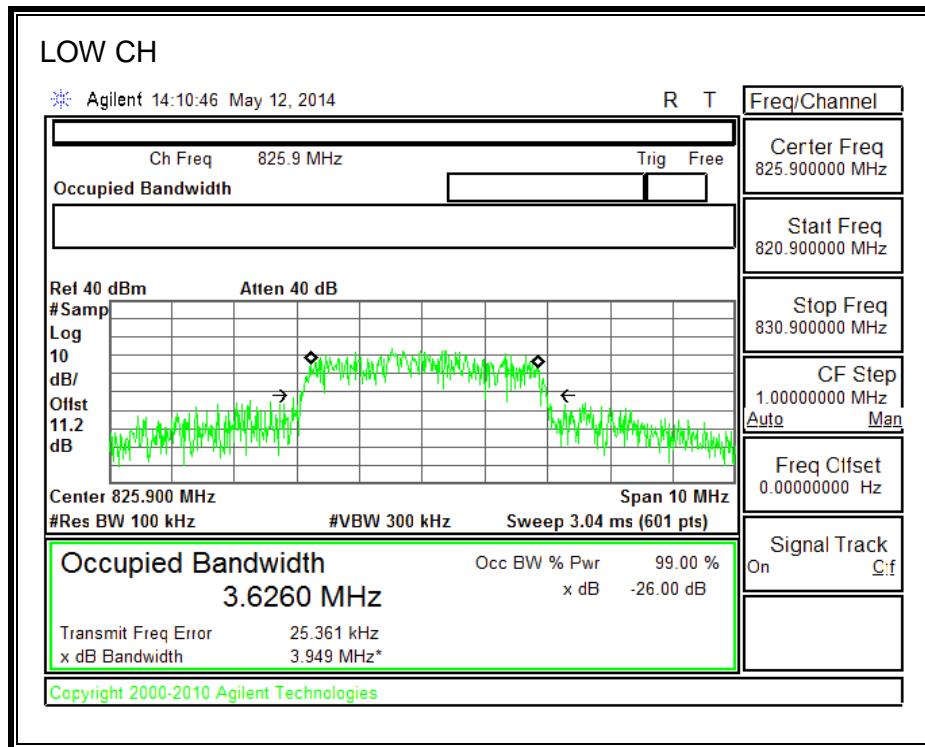

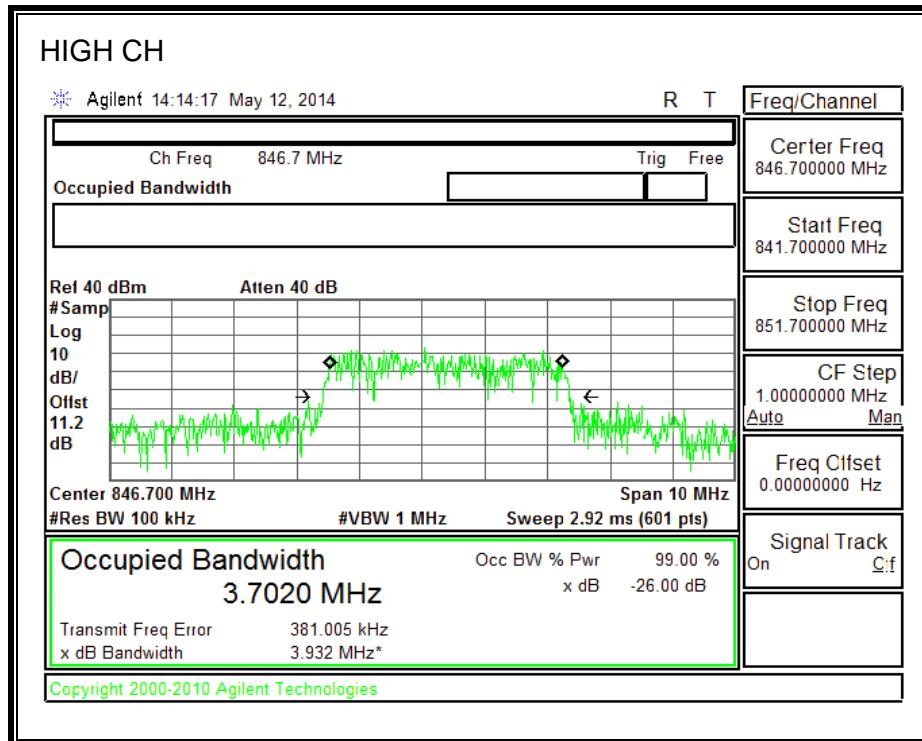

8.2. BAND EDGE

RULE PART(S)

FCC: §22.359, 24.238 §27.53, § 90.691.

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

Compliance with the provisions of paragraphs above of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

FCC: §90.210, and §90.691

(a)(1)For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(a)(2)For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz. {NOTE: Use 100 kHz reference bandwidth

TEST PROCEDURE

The transmitter output was connected to a Agilent 8960 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

- Set the spectrum analyzer span to include the block edge frequency (824, 849, 1850, 1910MHz)
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.



MODES TESTED

- GPRS and EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, BC0, BC1, BC10 and BC15



RESULTS

8.2.1. GSM-GPRS

850MHz BAND

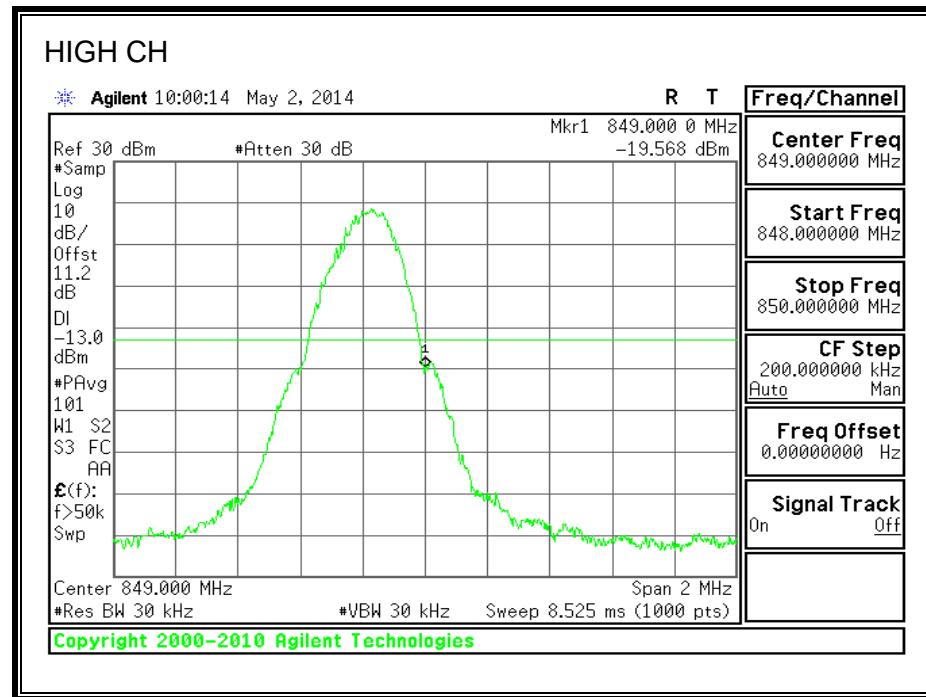
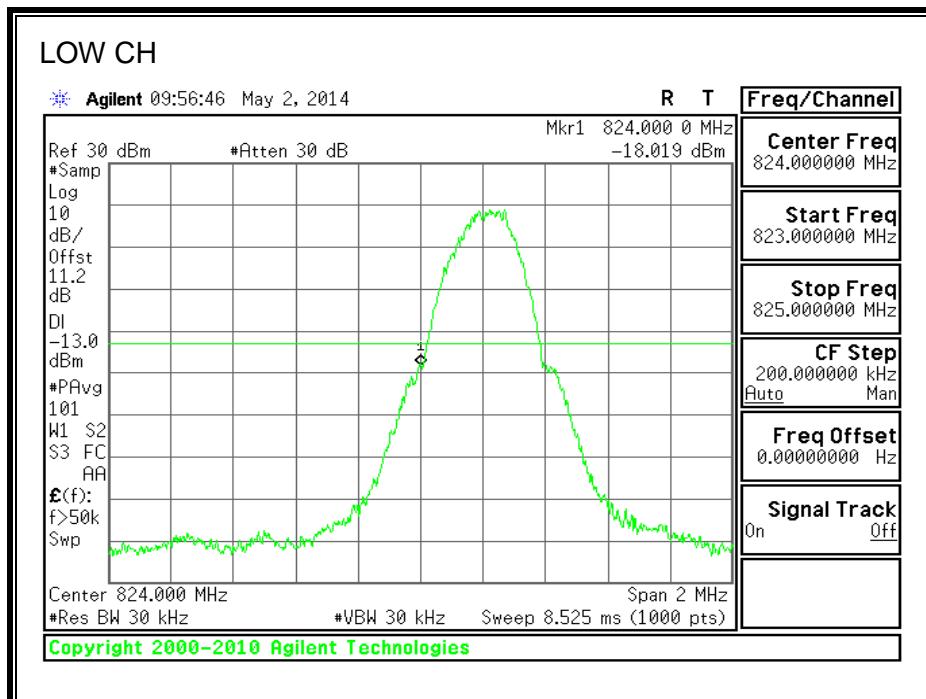


1900MHz BAND

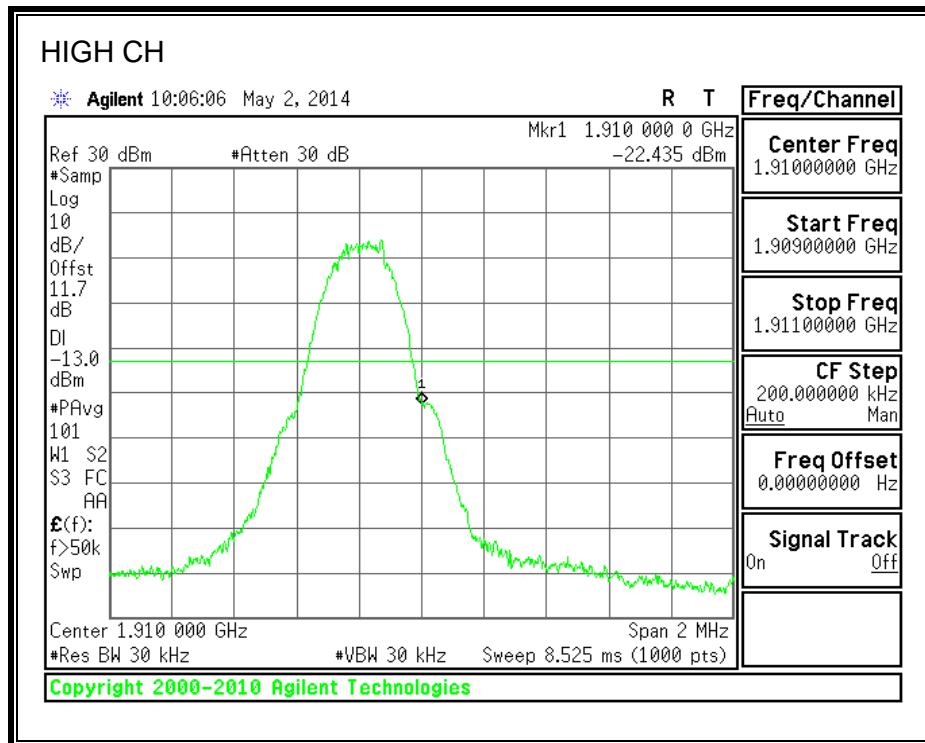
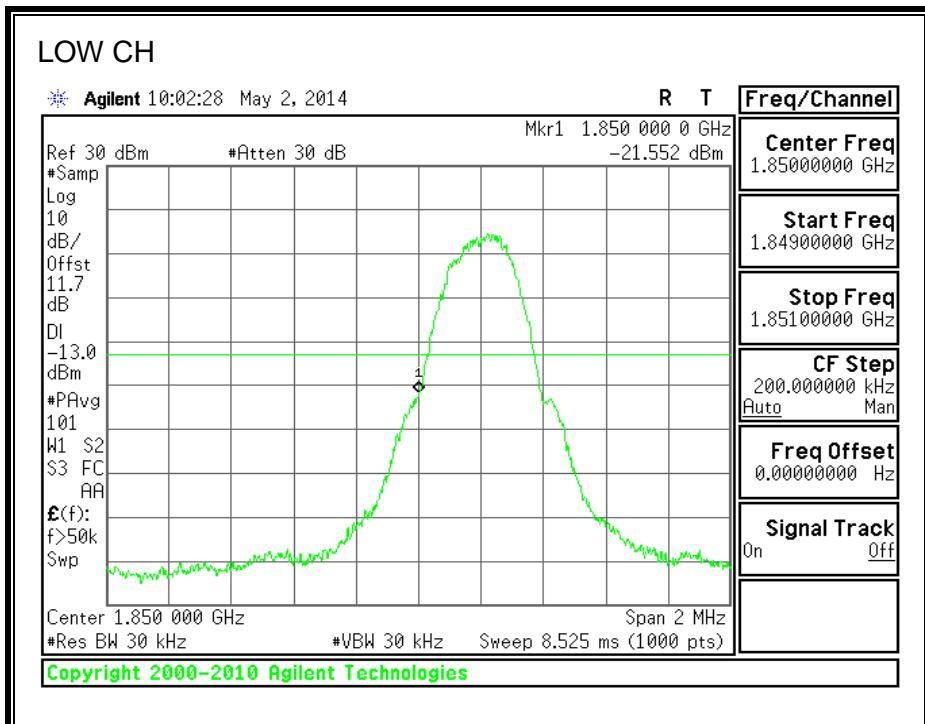


8.2.2. GSM-EGPRS

850MHz BAND

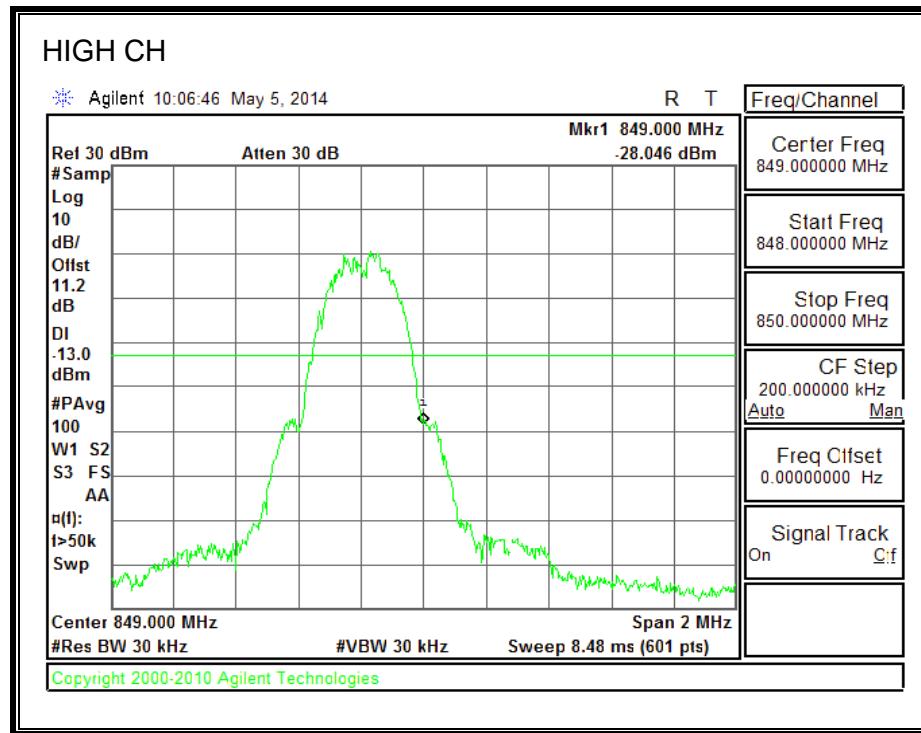
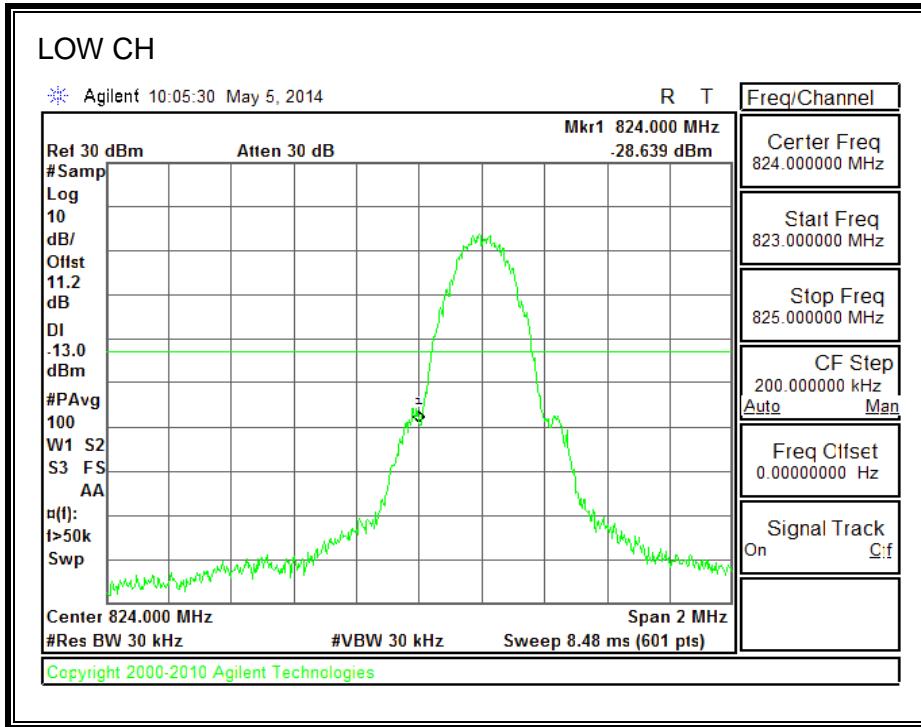


1900MHz BAND

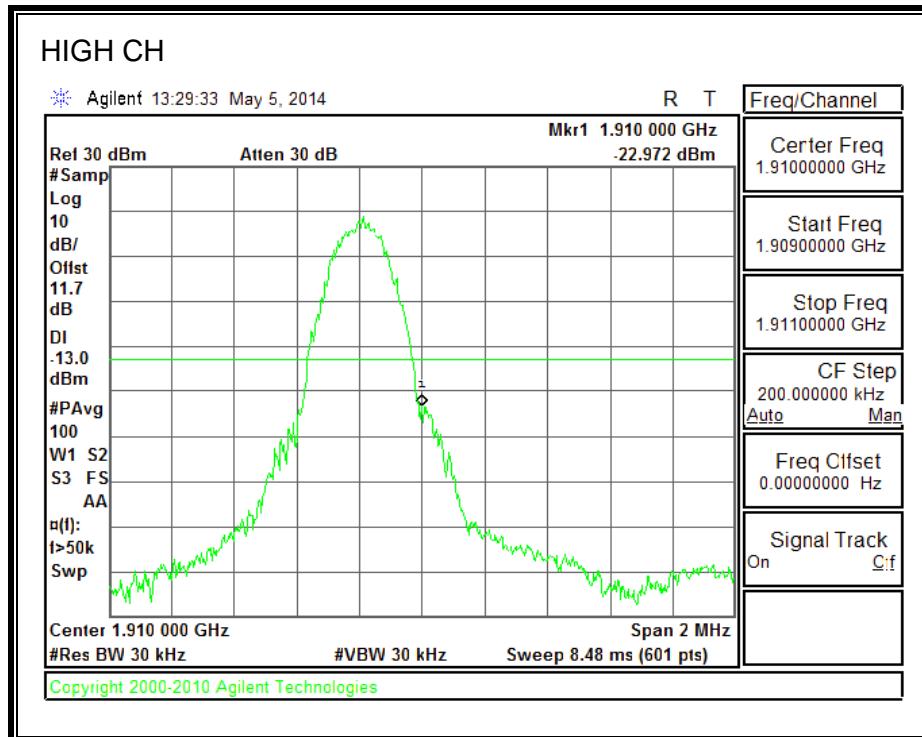
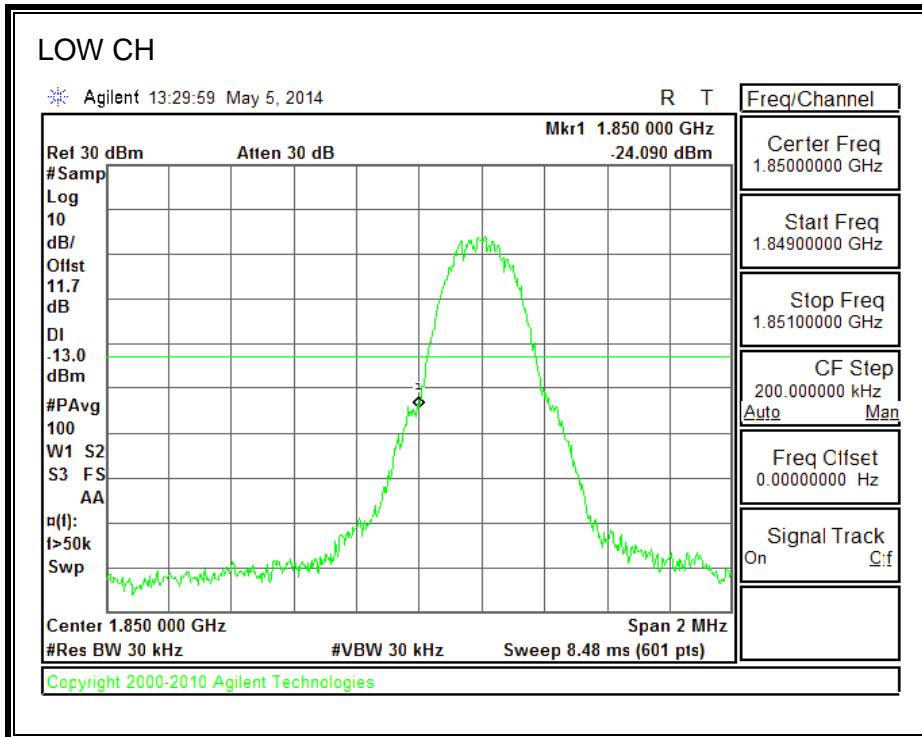


8.2.3. UMTS Rel. 99



850MHz BAND

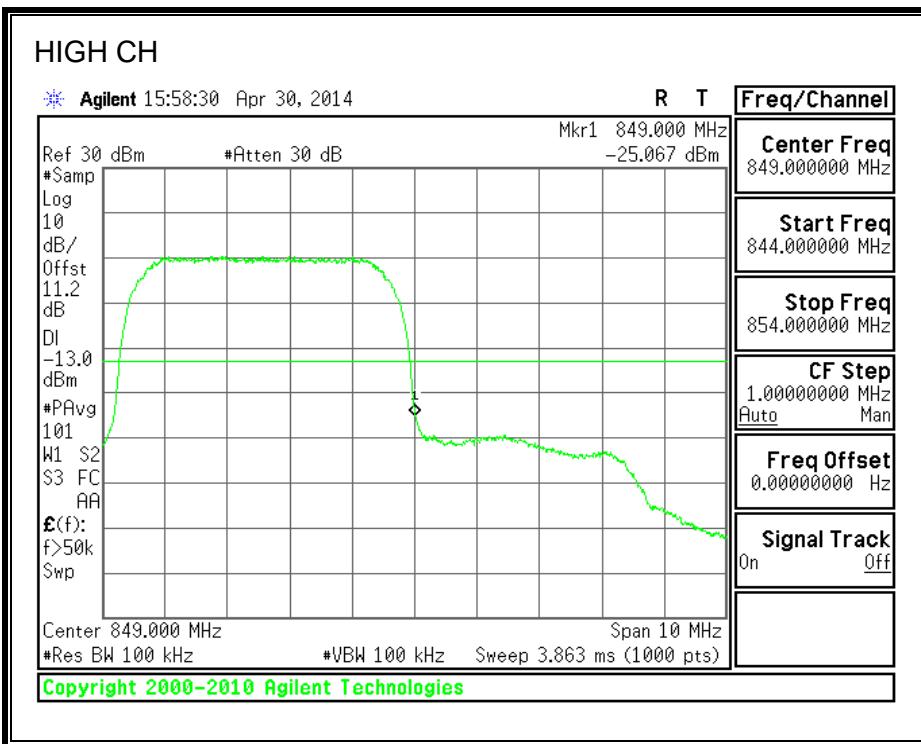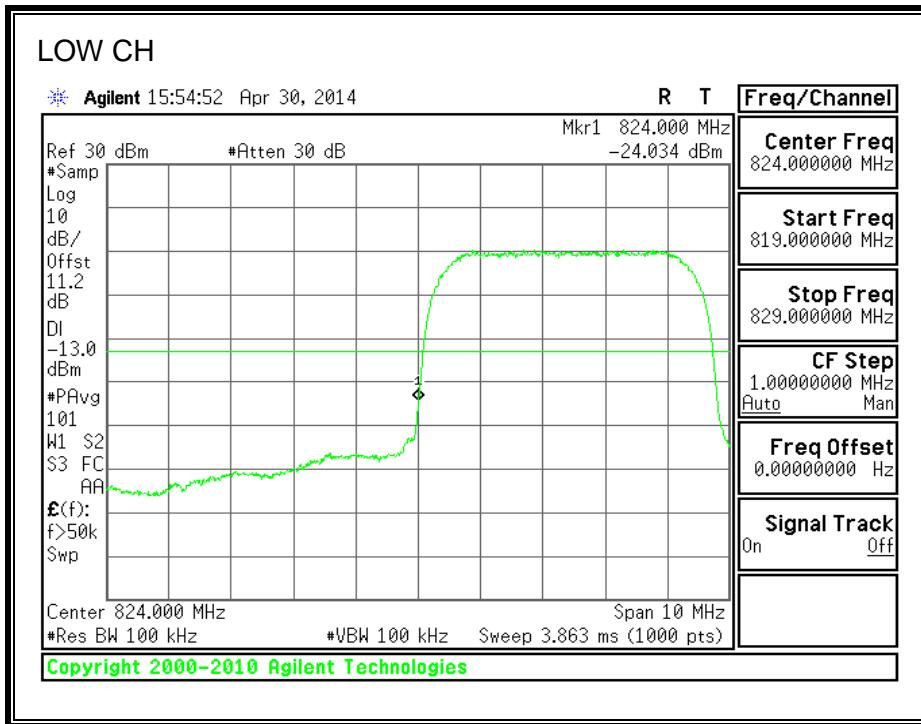

1900MHz BAND

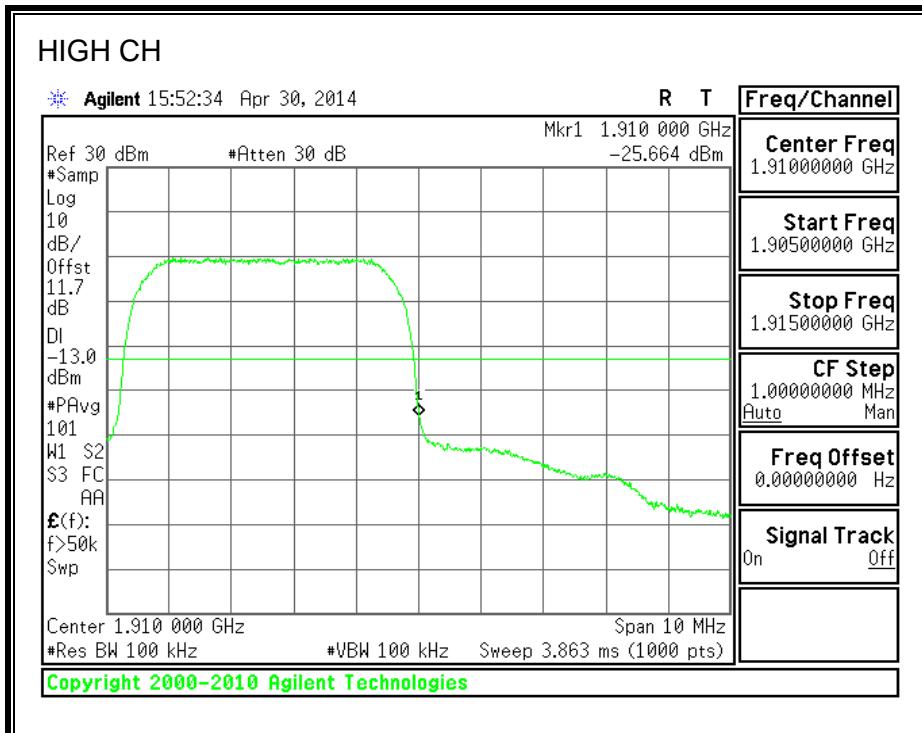
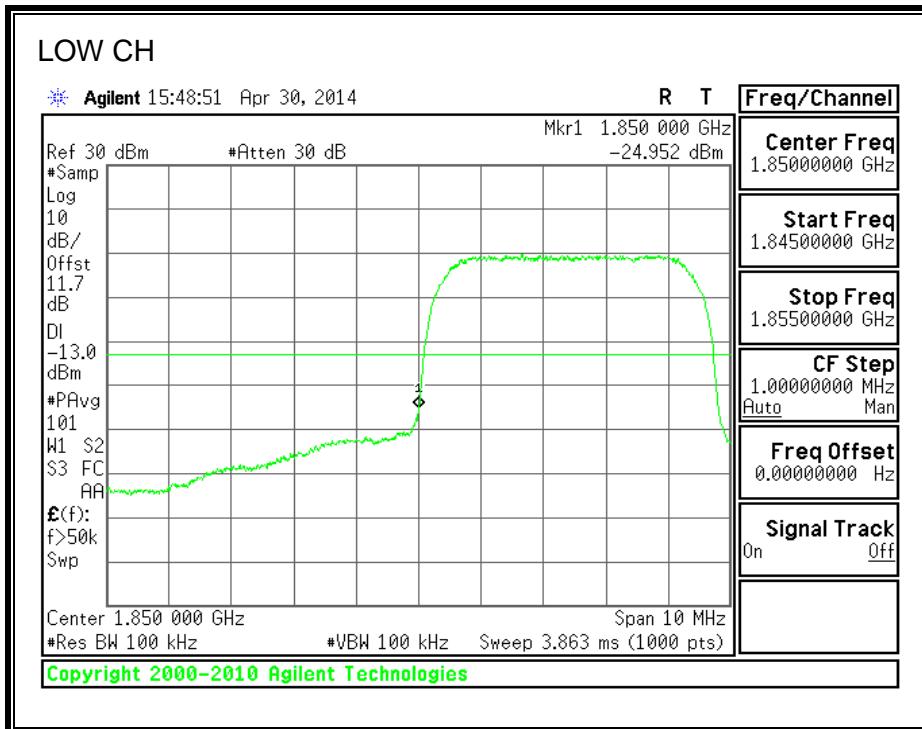


1700MHz BAND

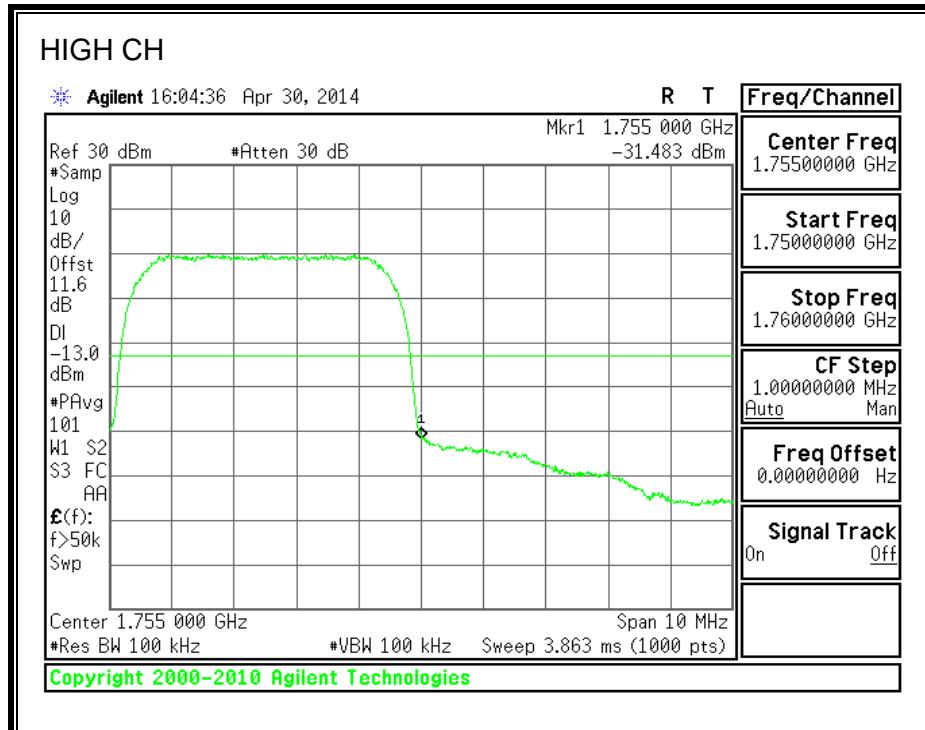
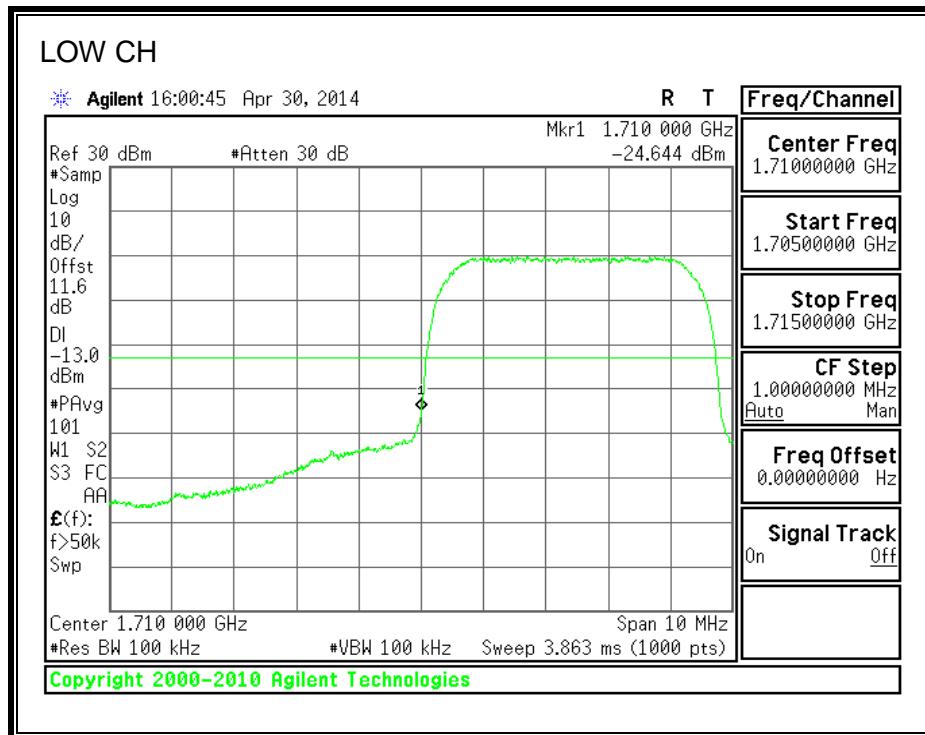


8.2.4. UMTS HSDPA



850MHz BAND

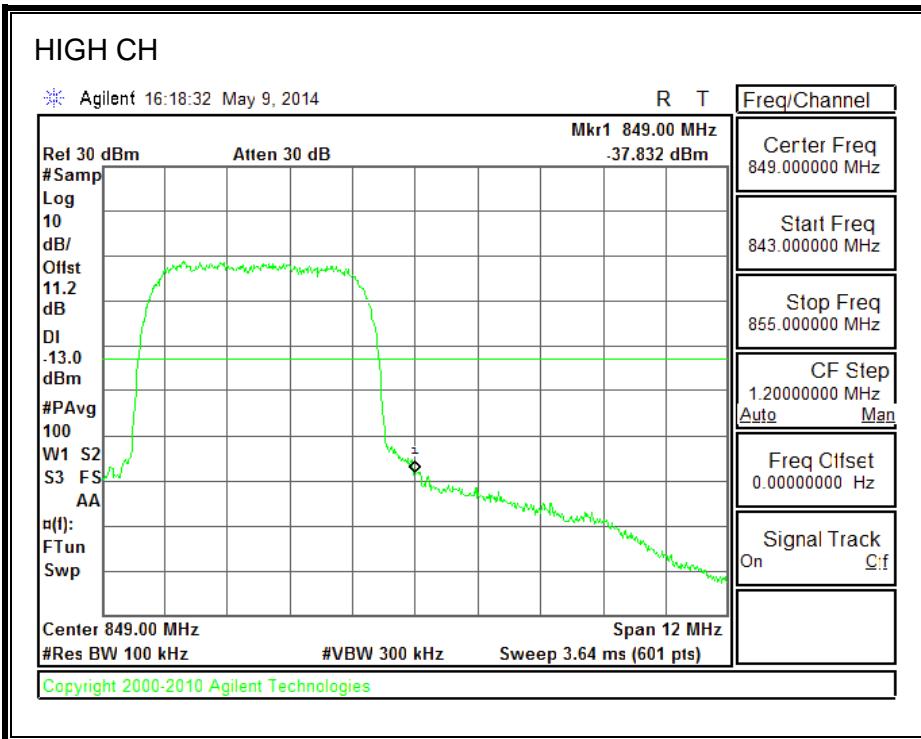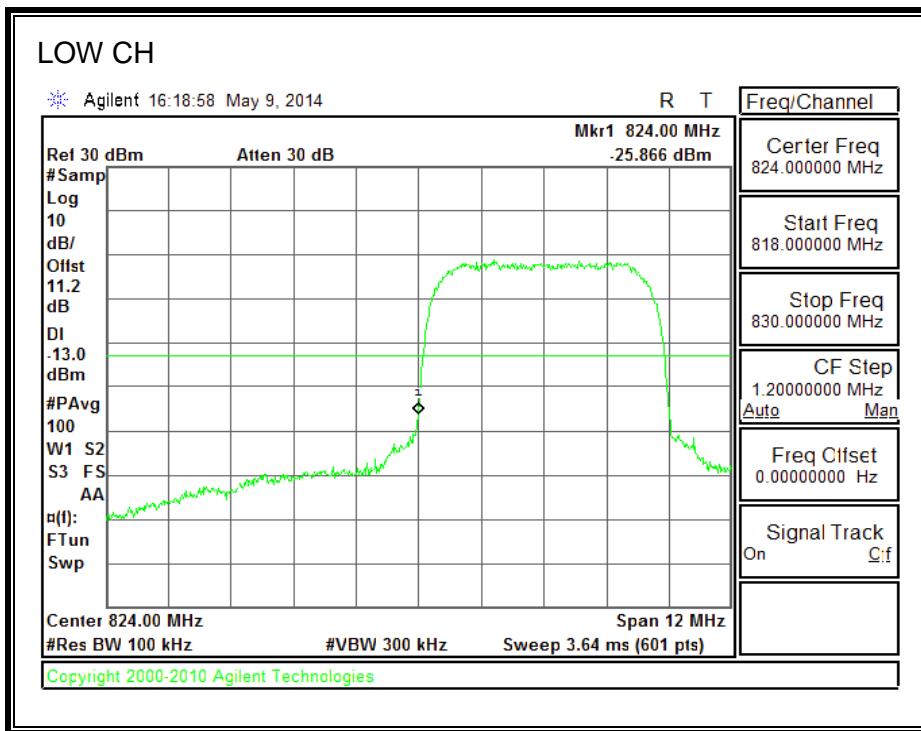

1900MHz BAND

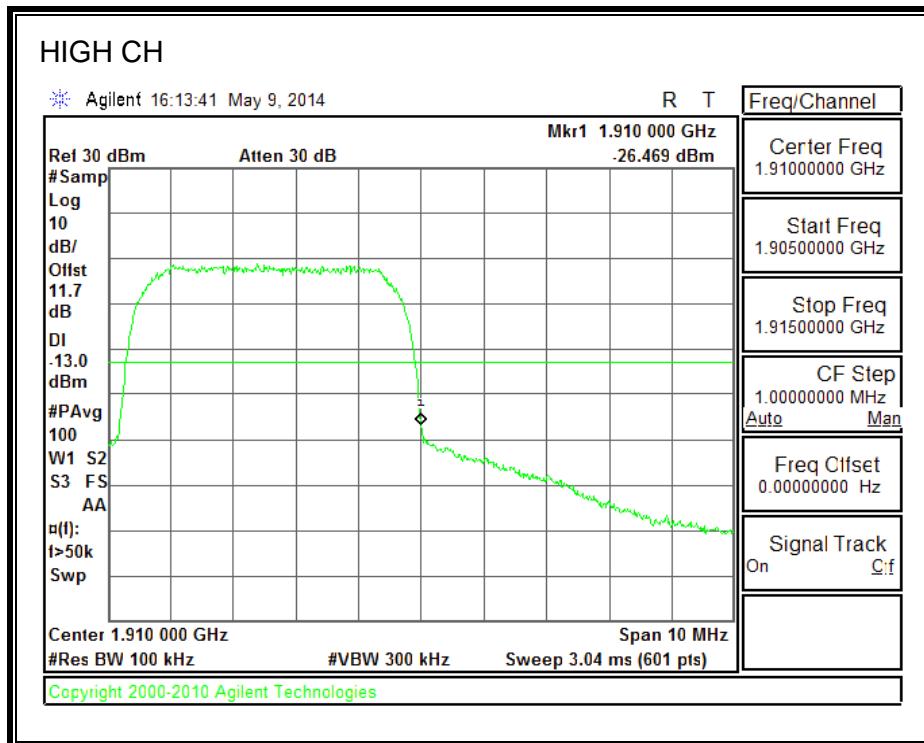
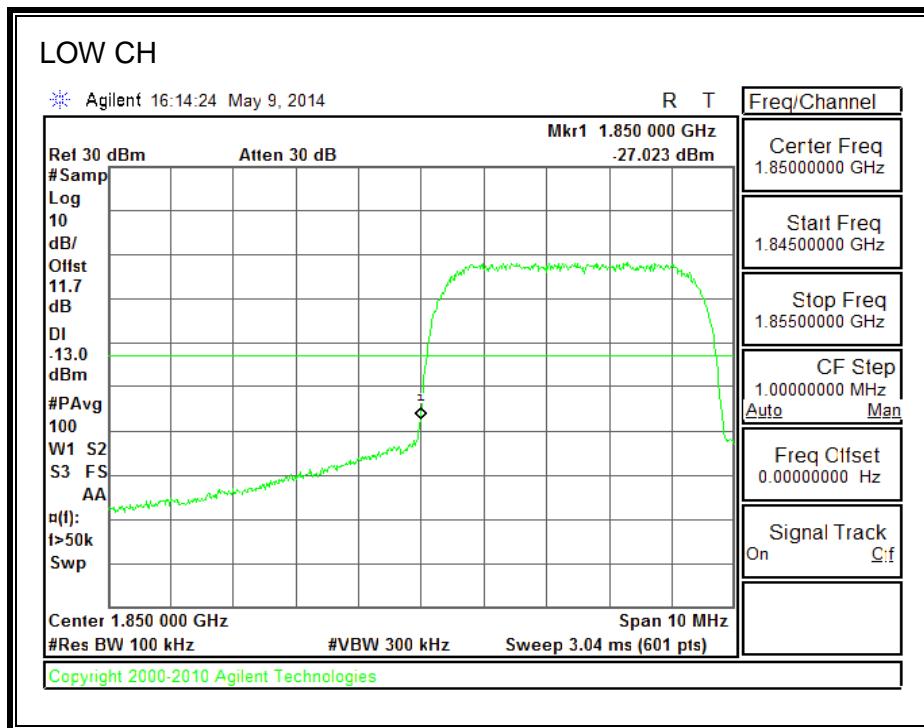


1700MHz BAND

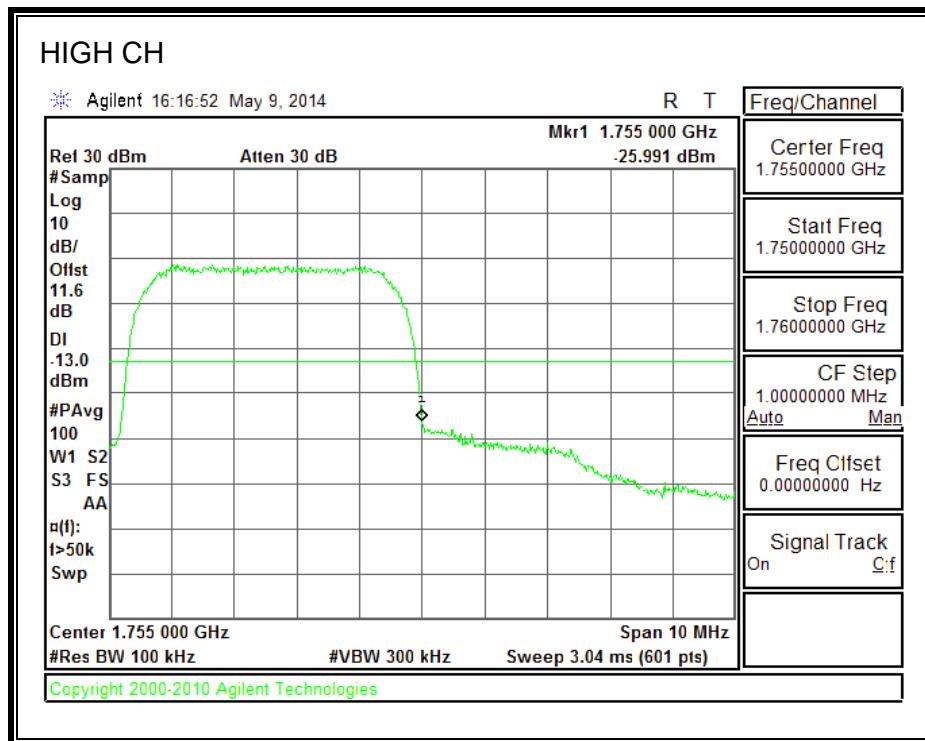
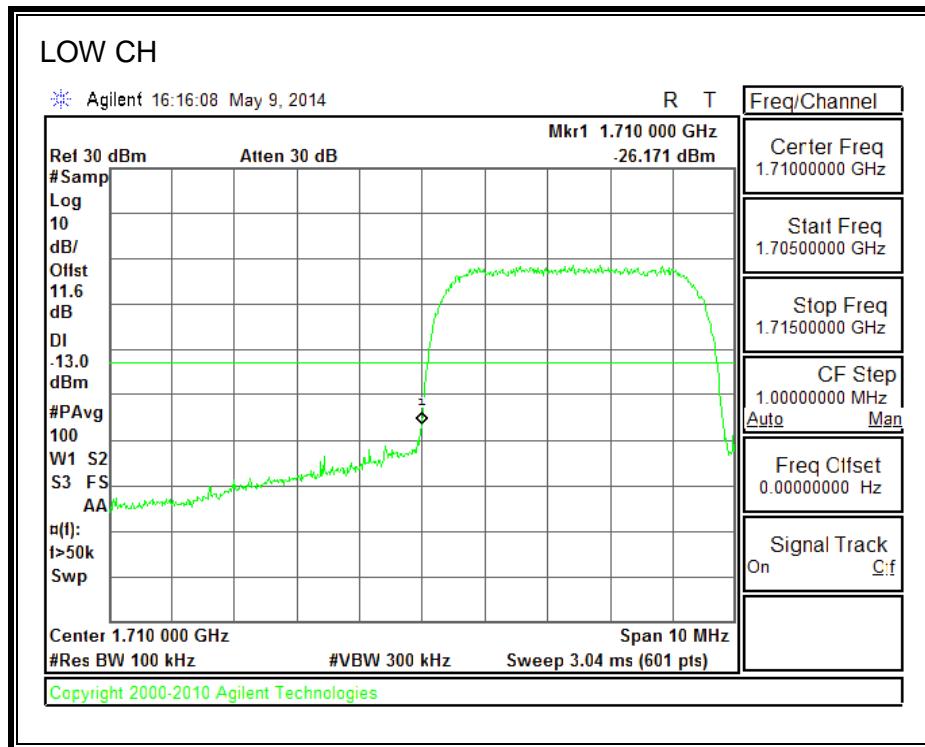


8.2.5. CDMA2000 1xRTT



850MHz BAND

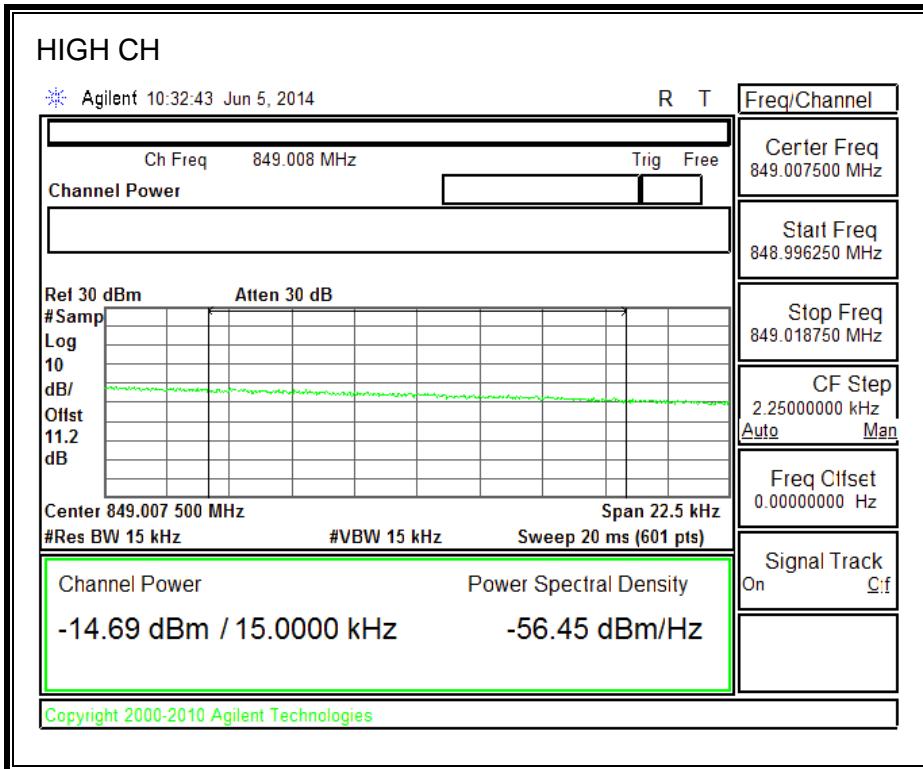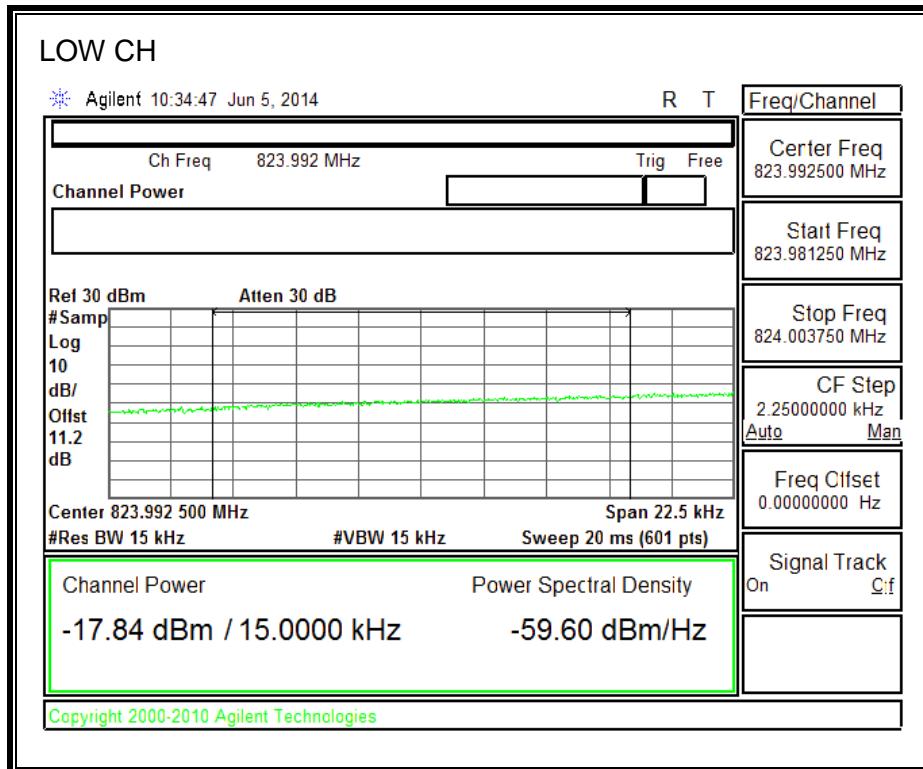



1900MHz BAND

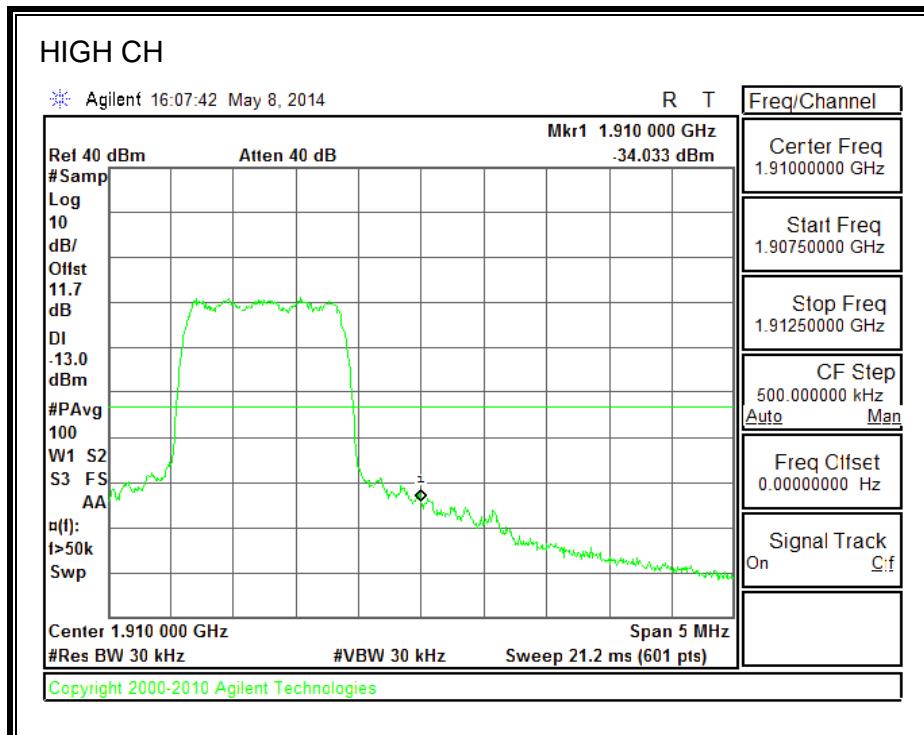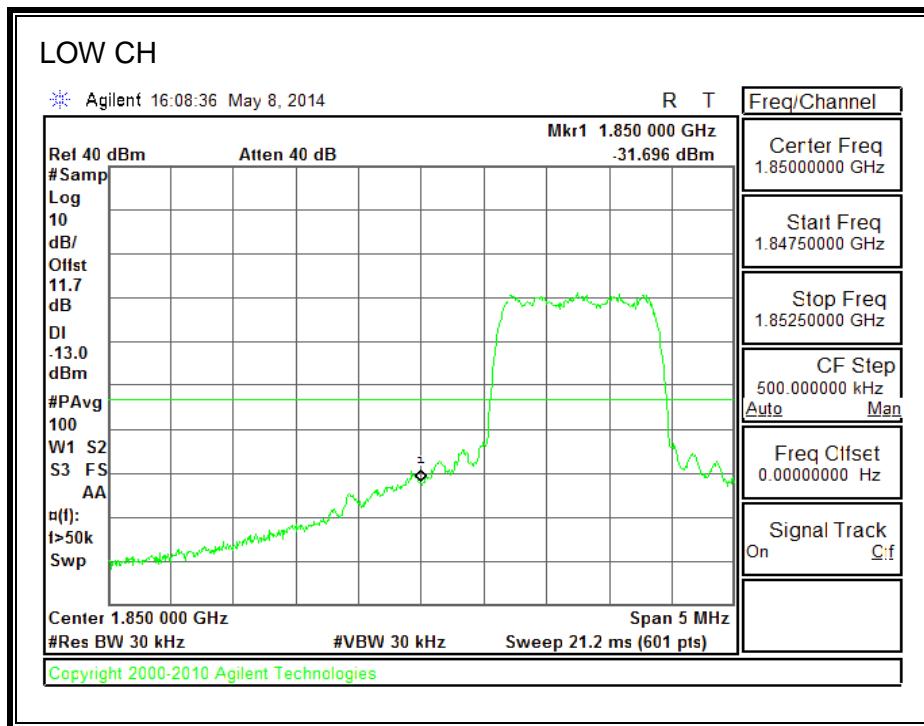


1700MHz BAND

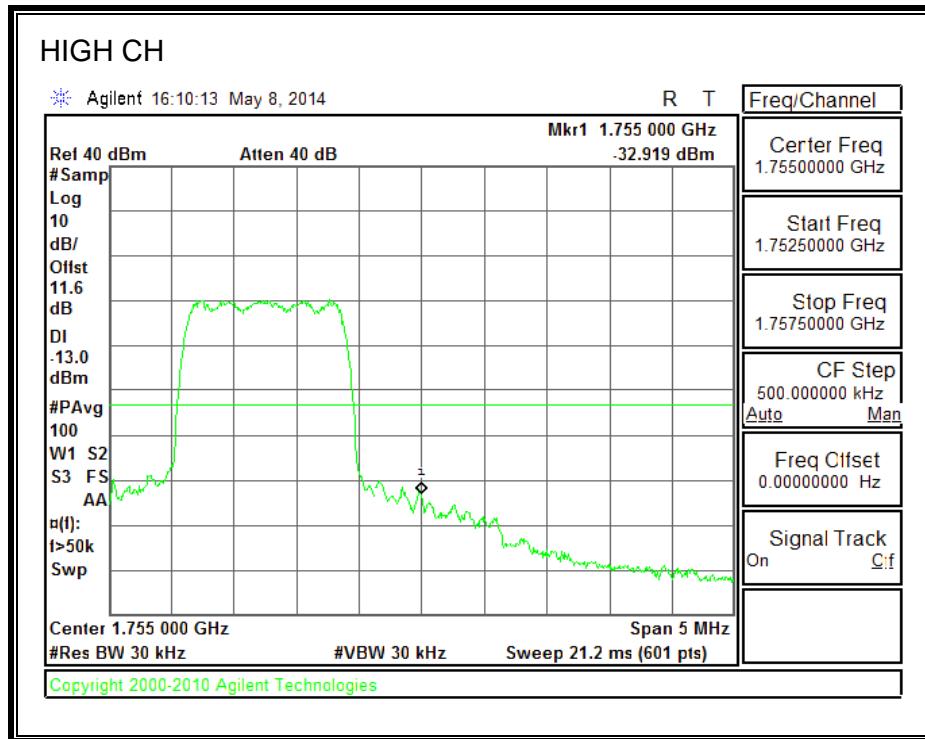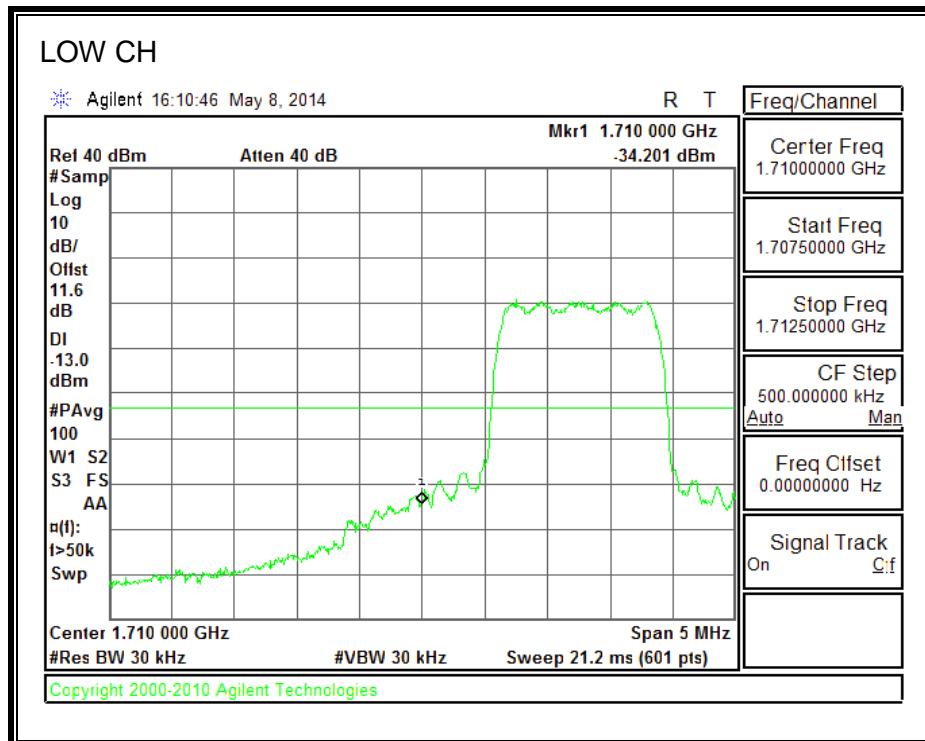


800MHz SECONDARY BAND

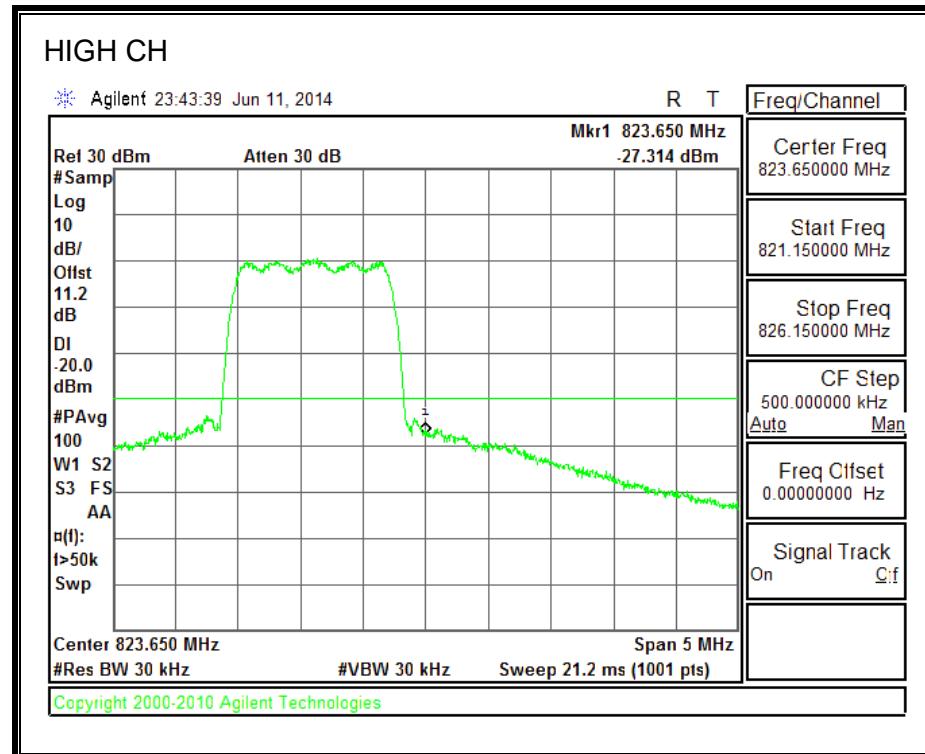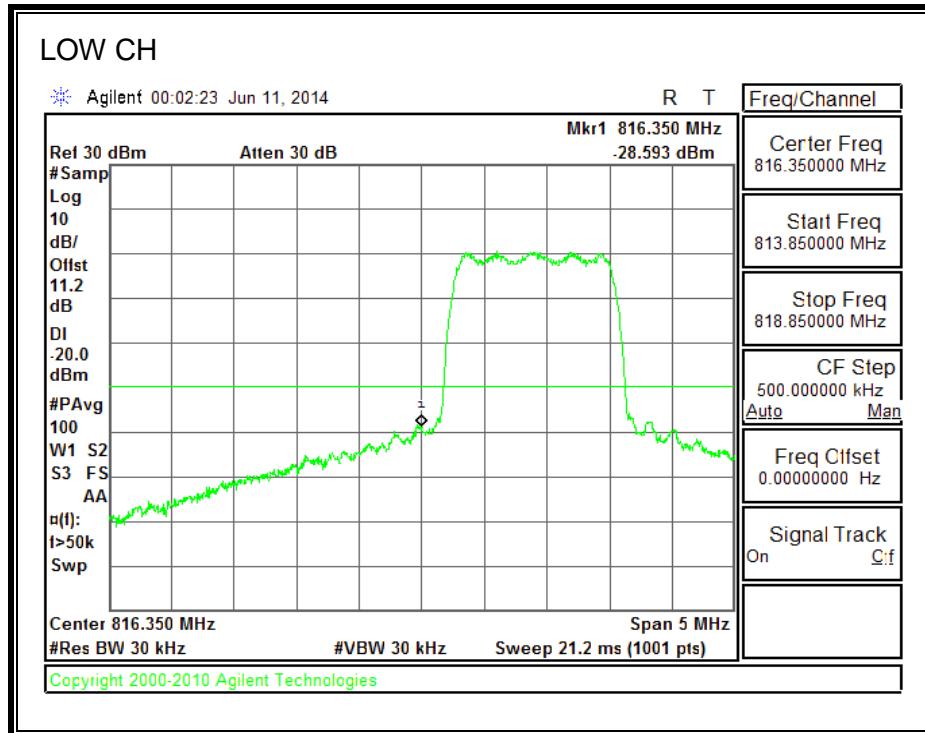


8.2.6. CDMA2000 1xRTT BC10 MASK

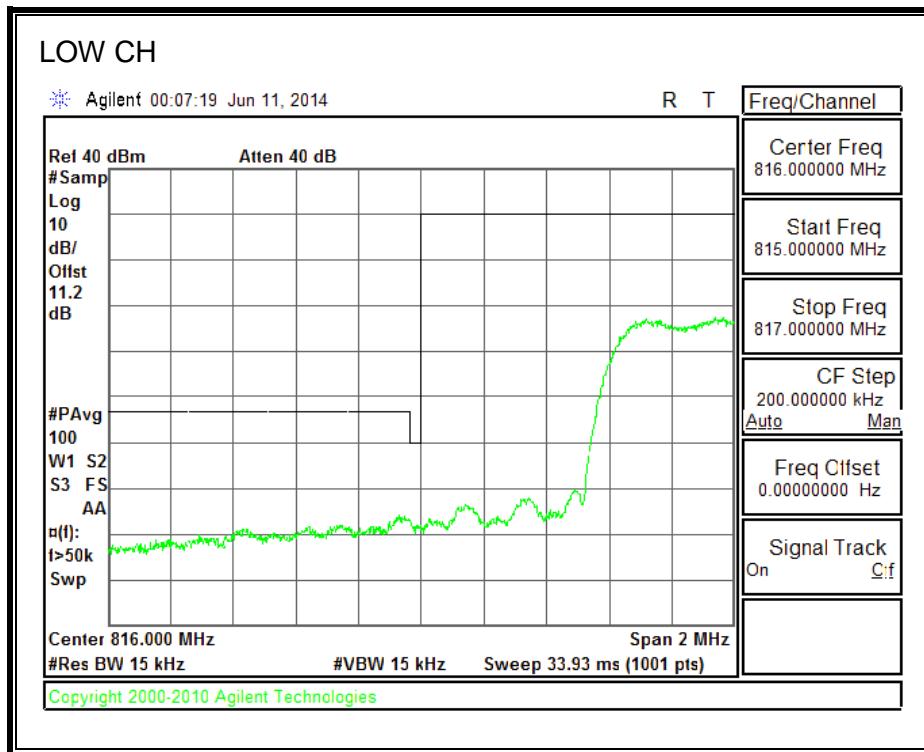


Note: RBW=1% of EBW

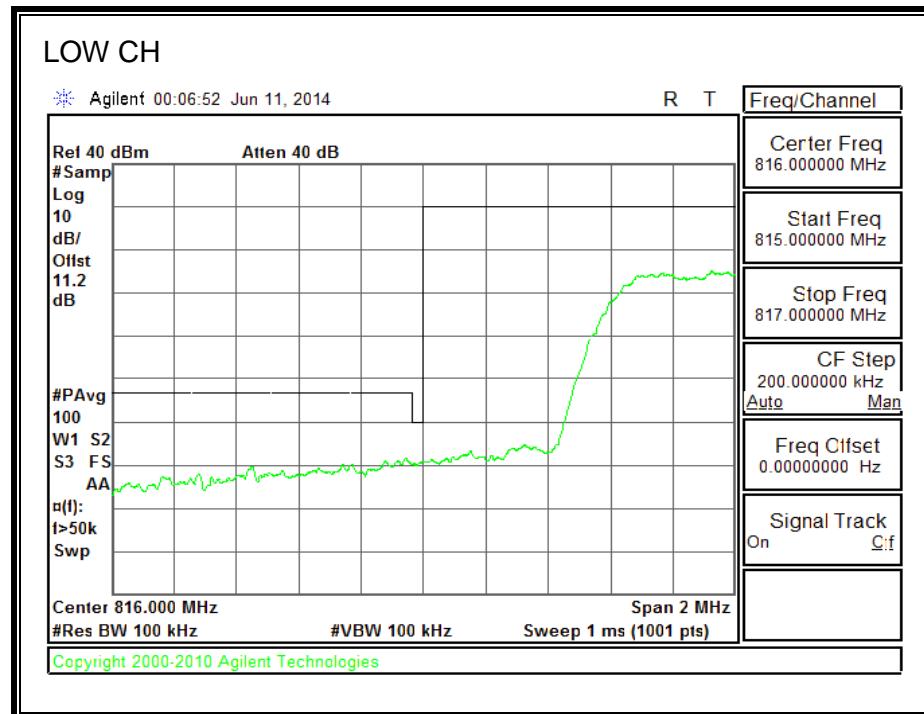

Note: RBW of 1% of 37.5KHz of outer channel frequency block

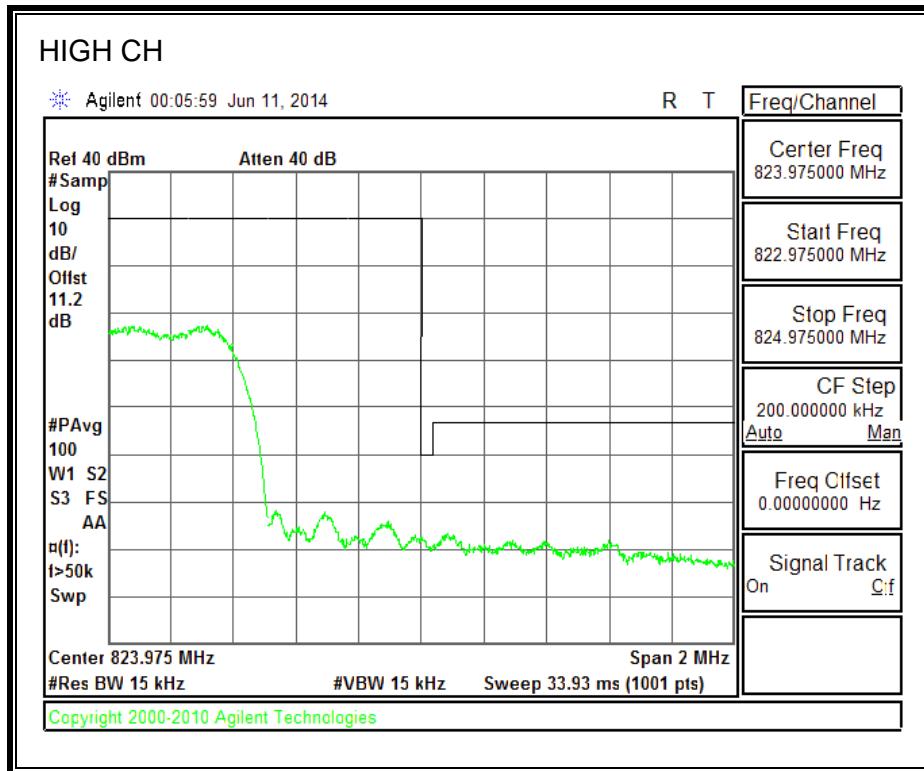



Note: RBW=1% of EBW

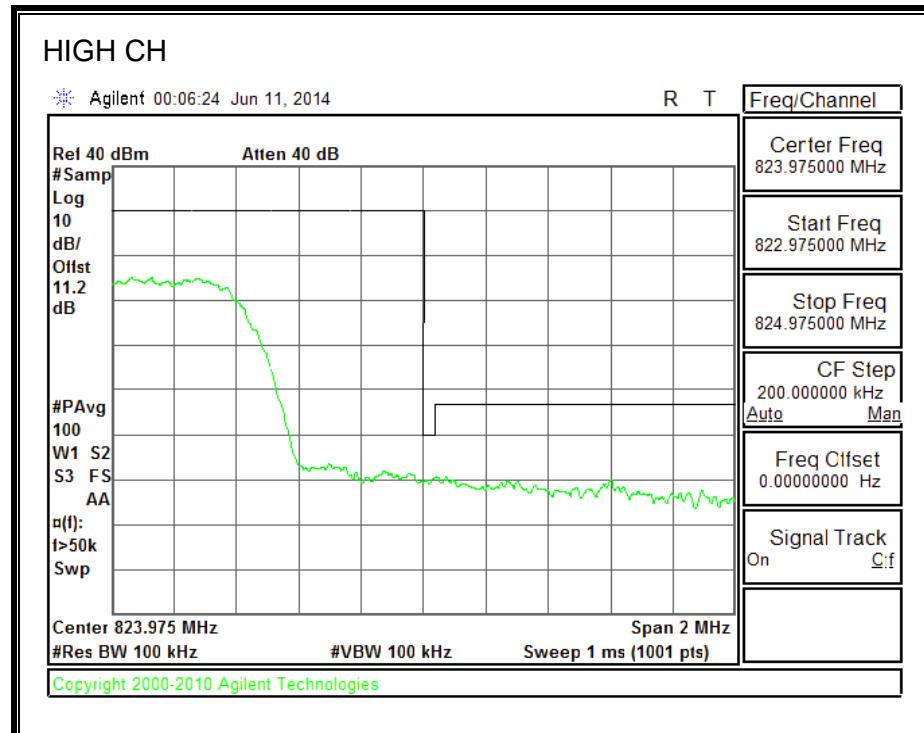



Note: RBW of 1% of 37.5KHz of outer channel frequency block

8.2.7. CDMA2000 EVDO Rev. A



850MHz BAND

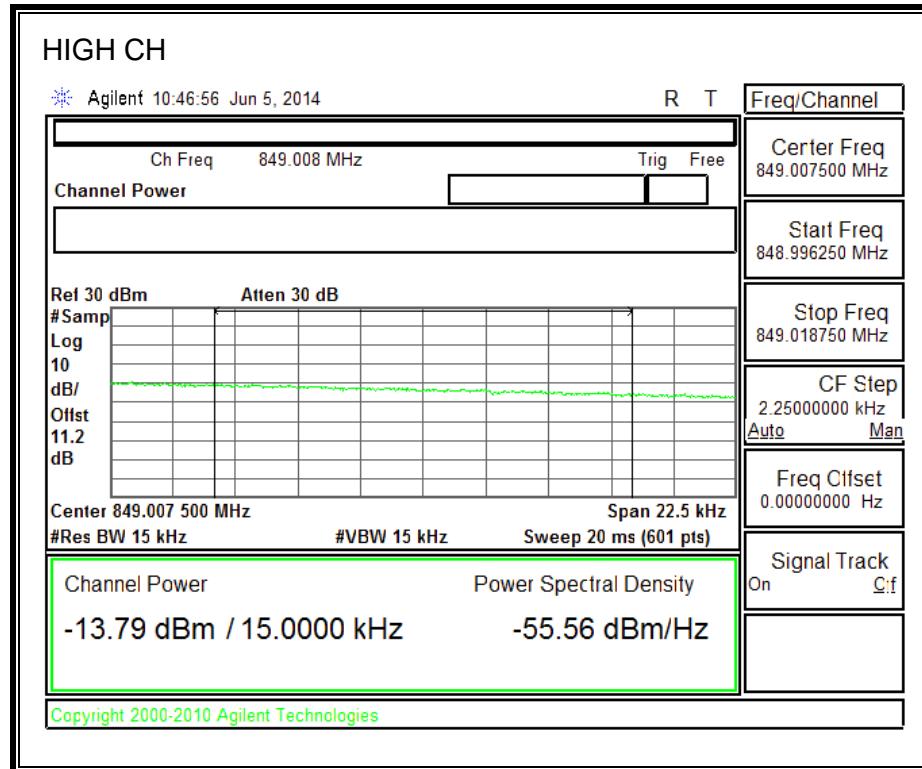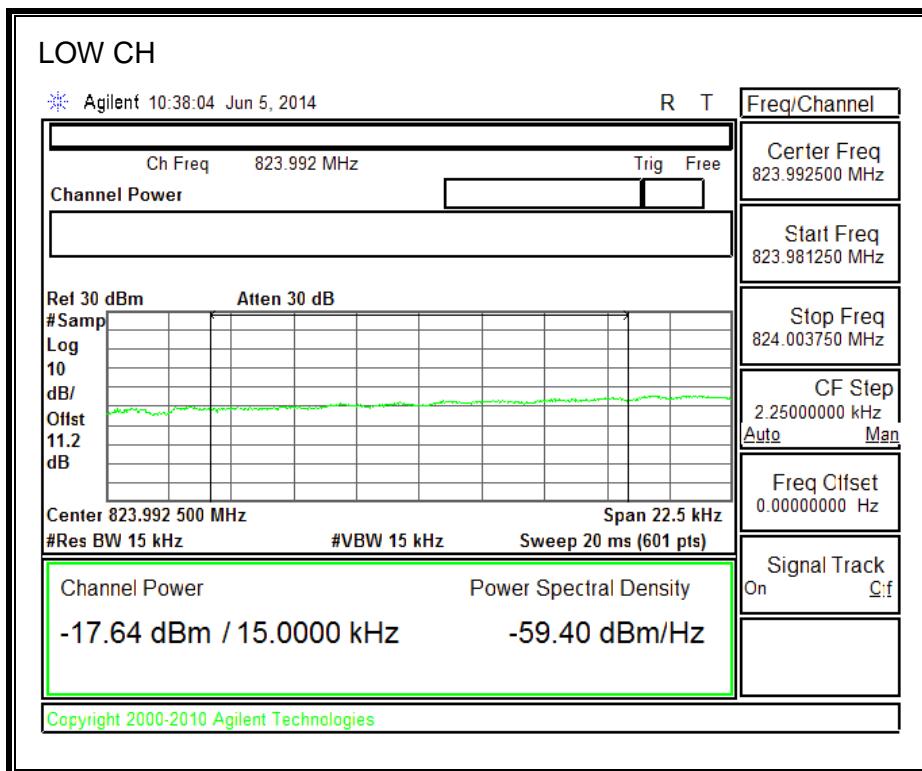



1900MHz BAND

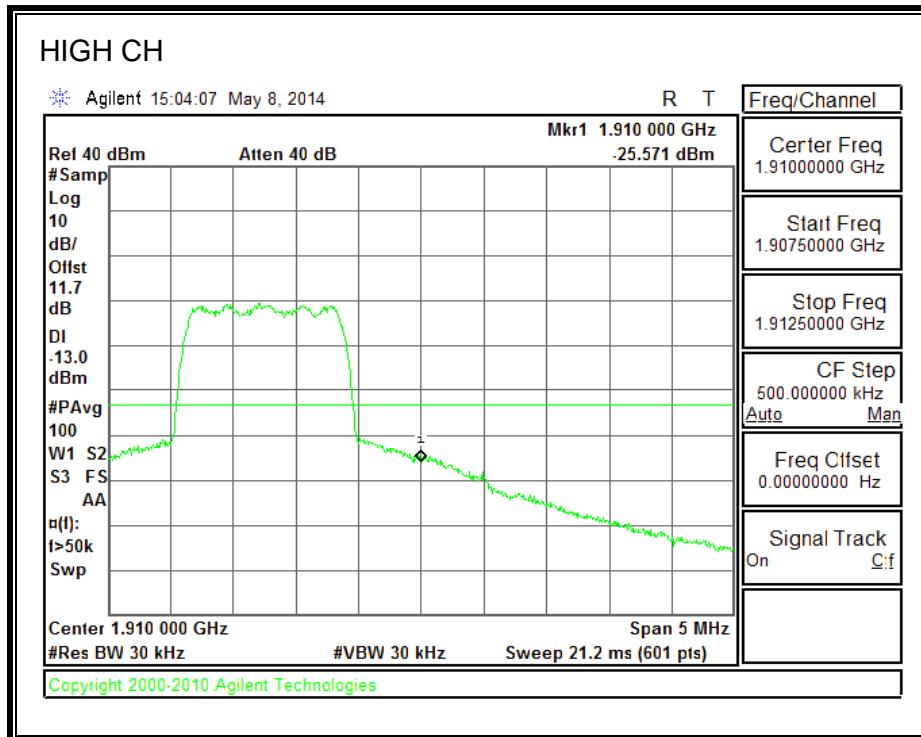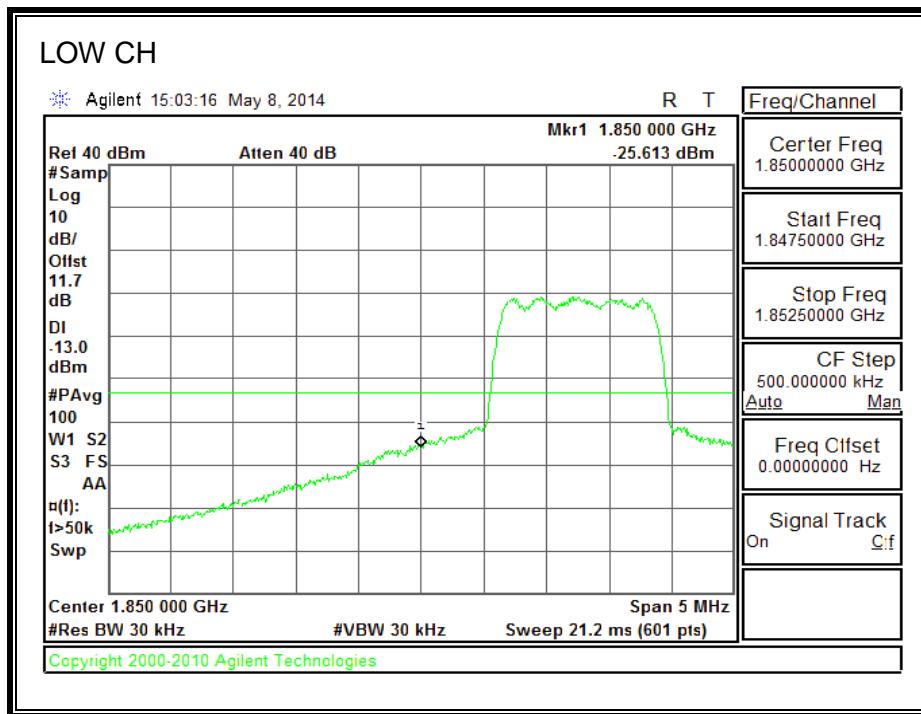


1700MHz BAND

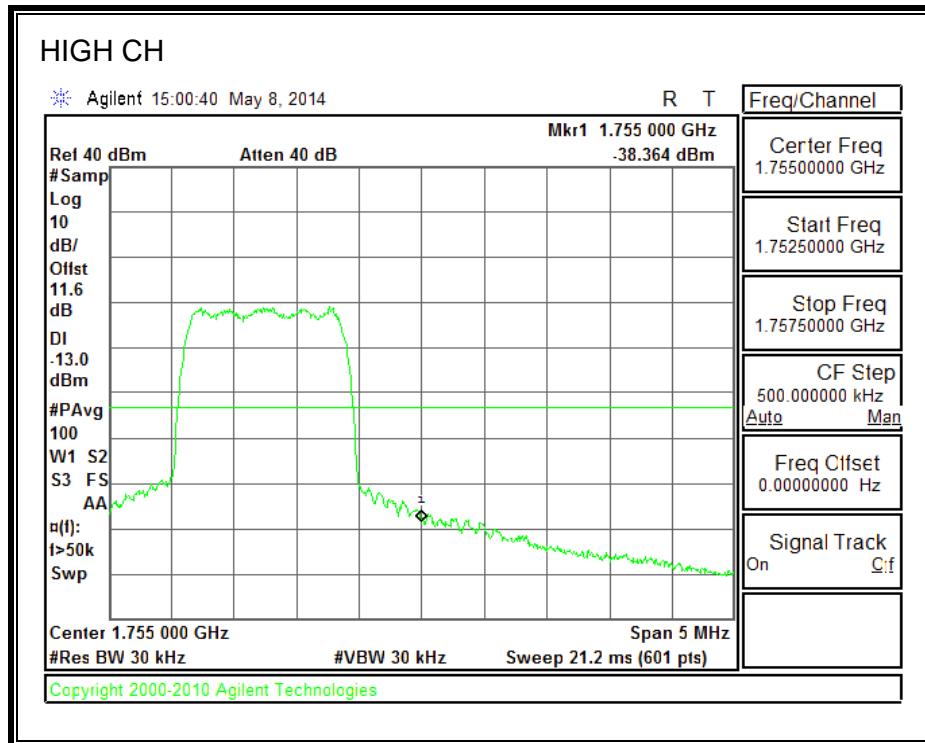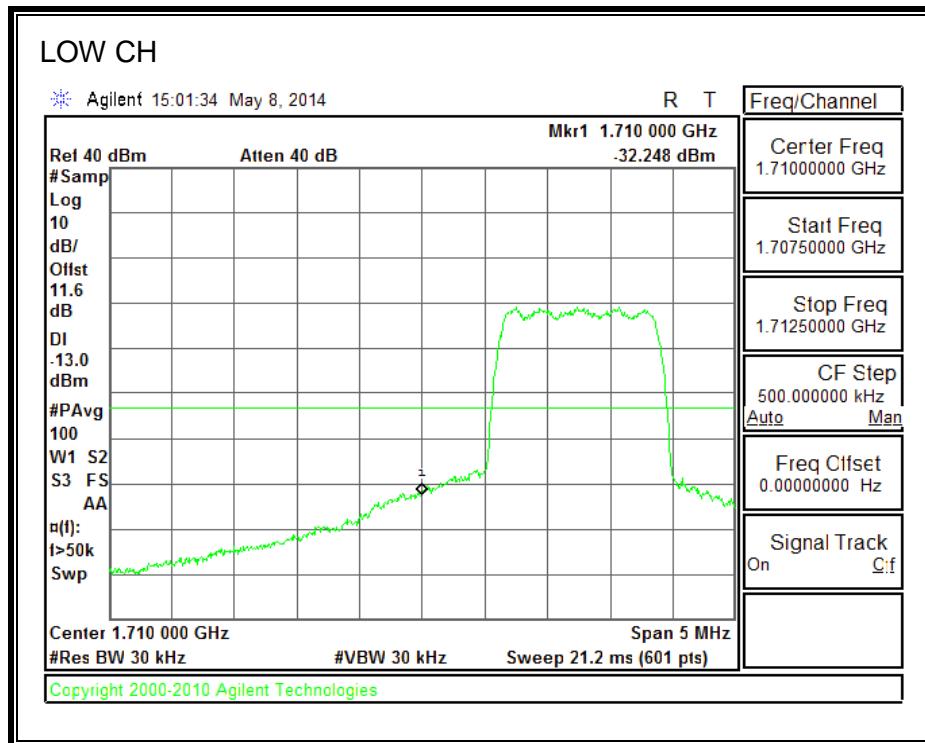


800MHz SECONDARY BAND

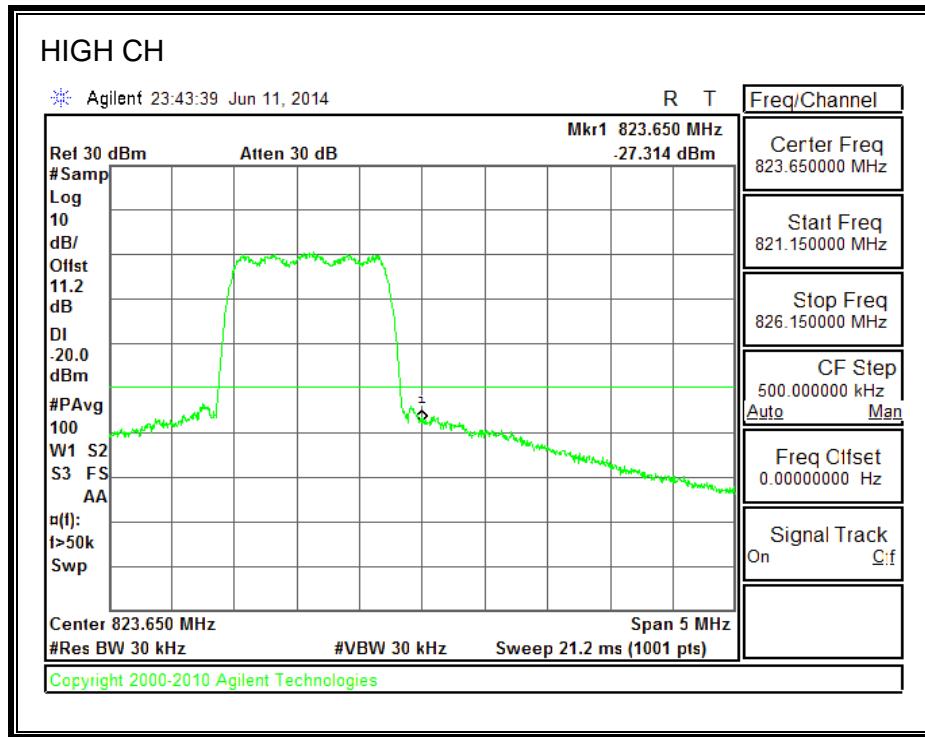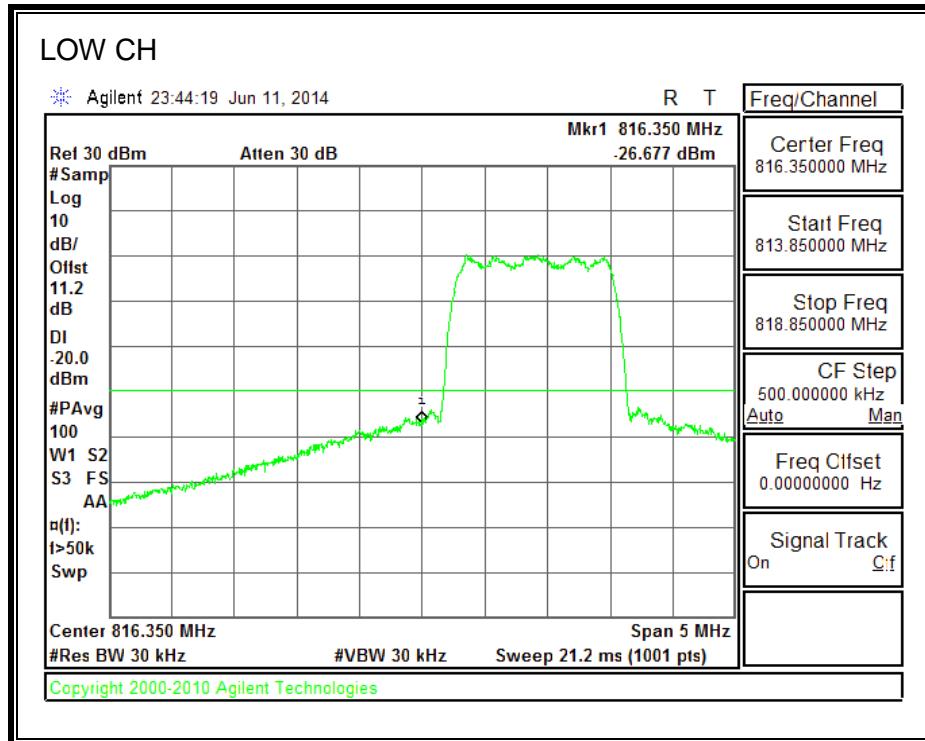


8.2.8. CDMA2000 REVA BC10 MASK

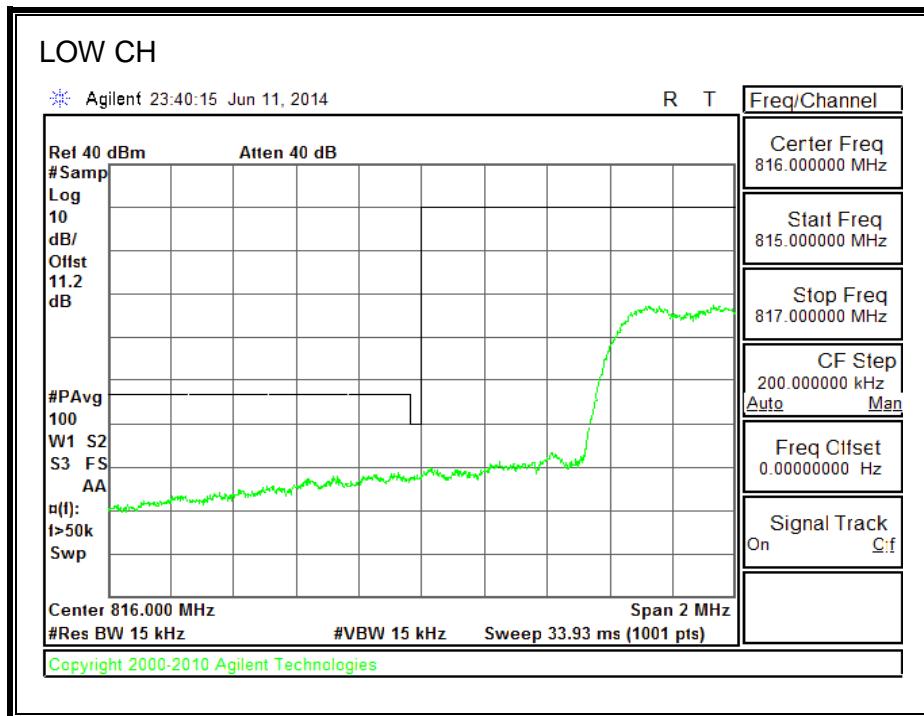


Note: RBW=1% of EBW

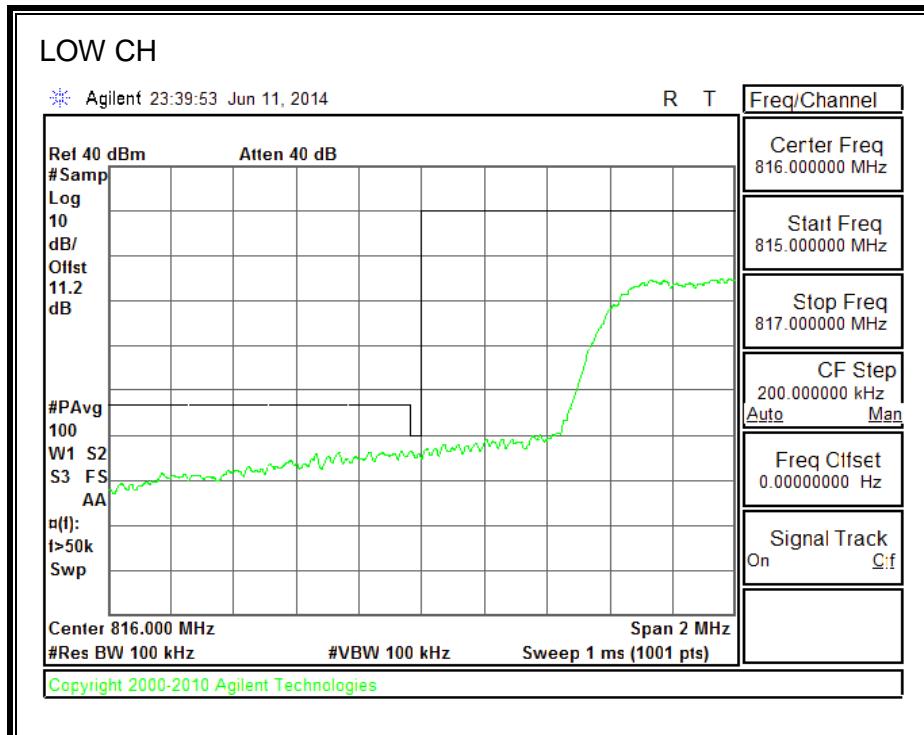

Note: RBW of 1% of 375KHz of outer channel frequency block

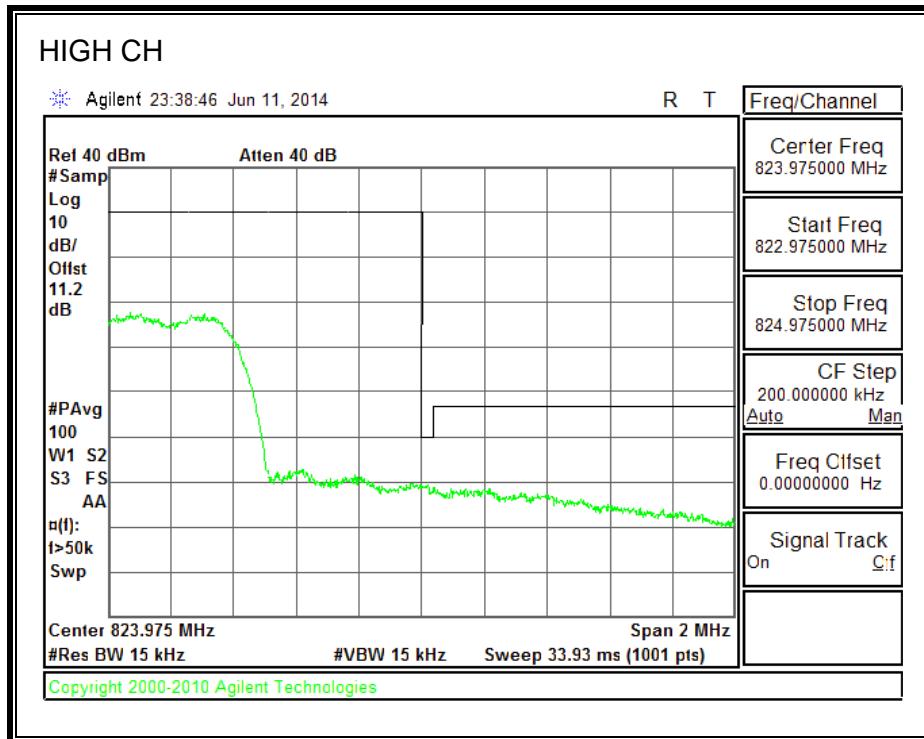

Note: RBW=1% of EBW

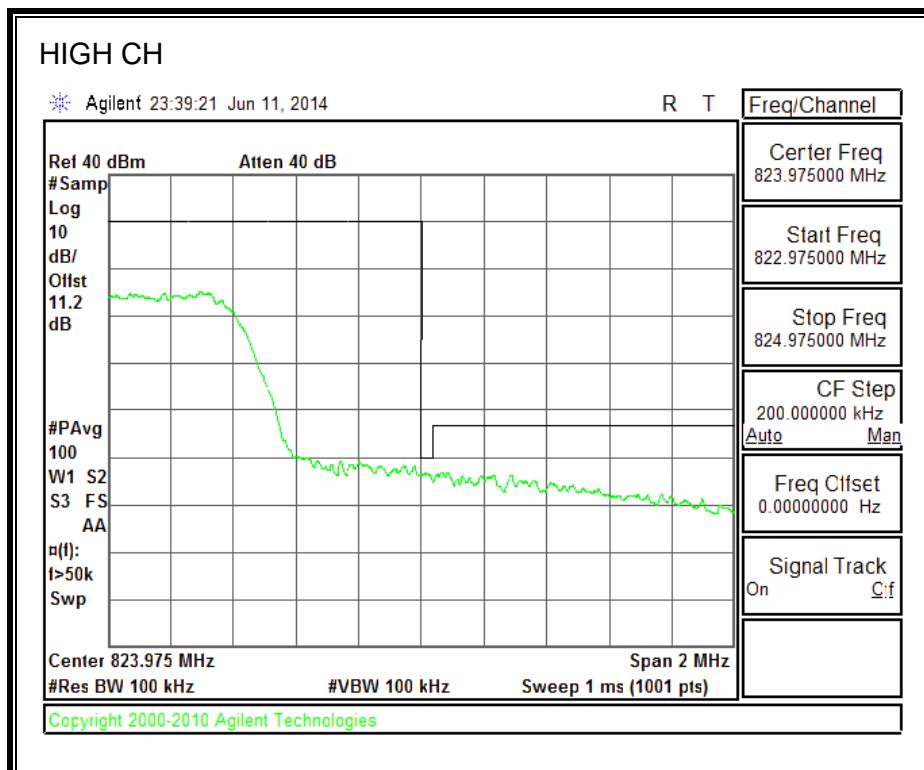

Note: RBW of 1% of 375KHz of outer channel frequency block

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §24.238 and §90.691

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.



MODES TESTED


- GPRS and EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, BC0, BC1 BC10 and BC15

RESULTS


8.3.1. GSM-GPRS



850MHz BAND

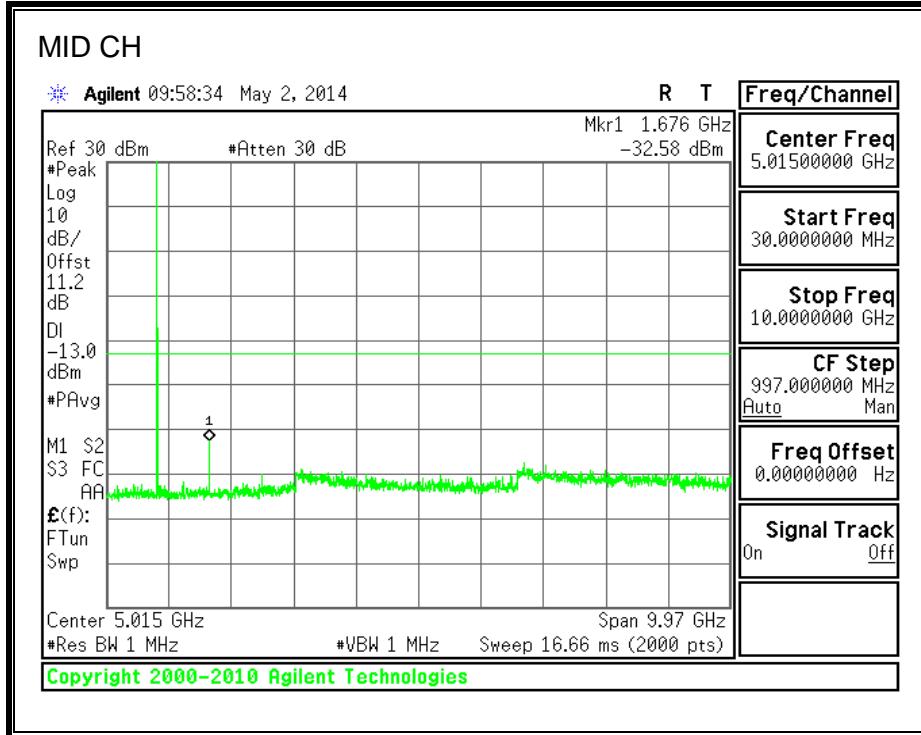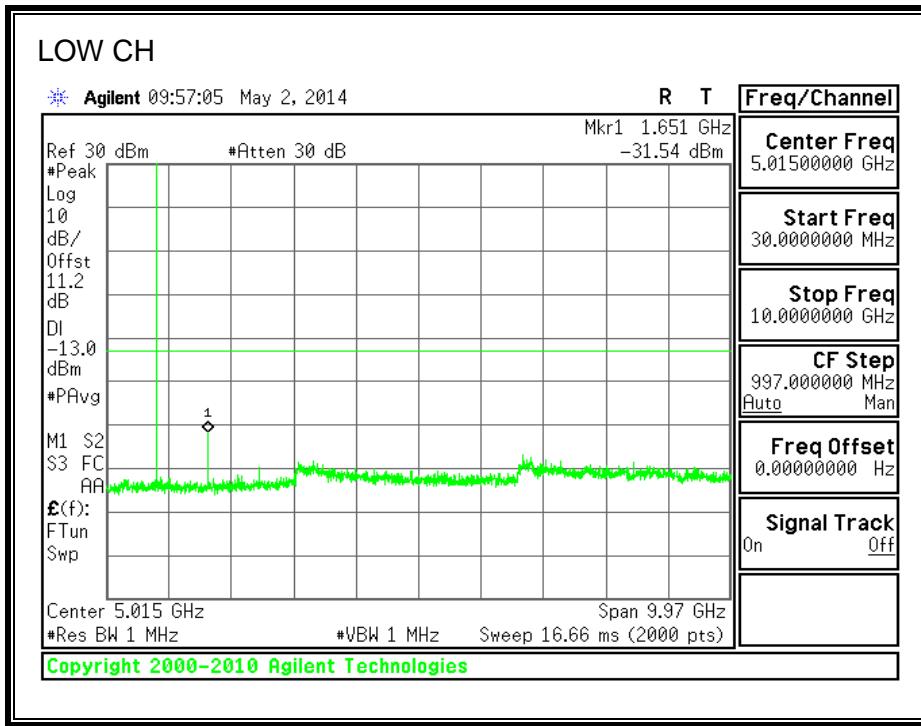

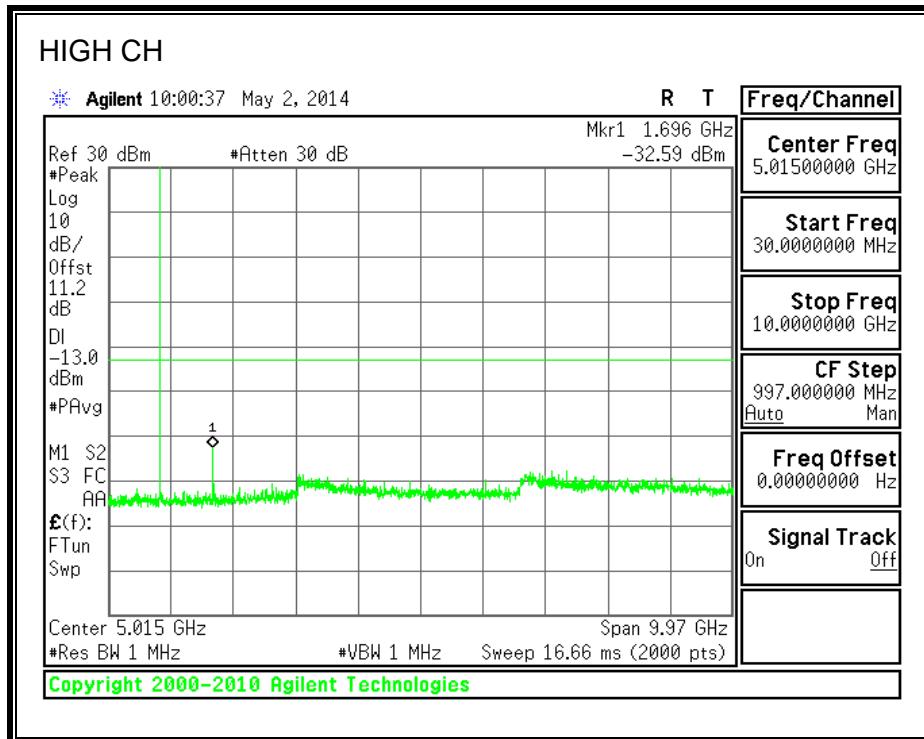



1900MHz BAND

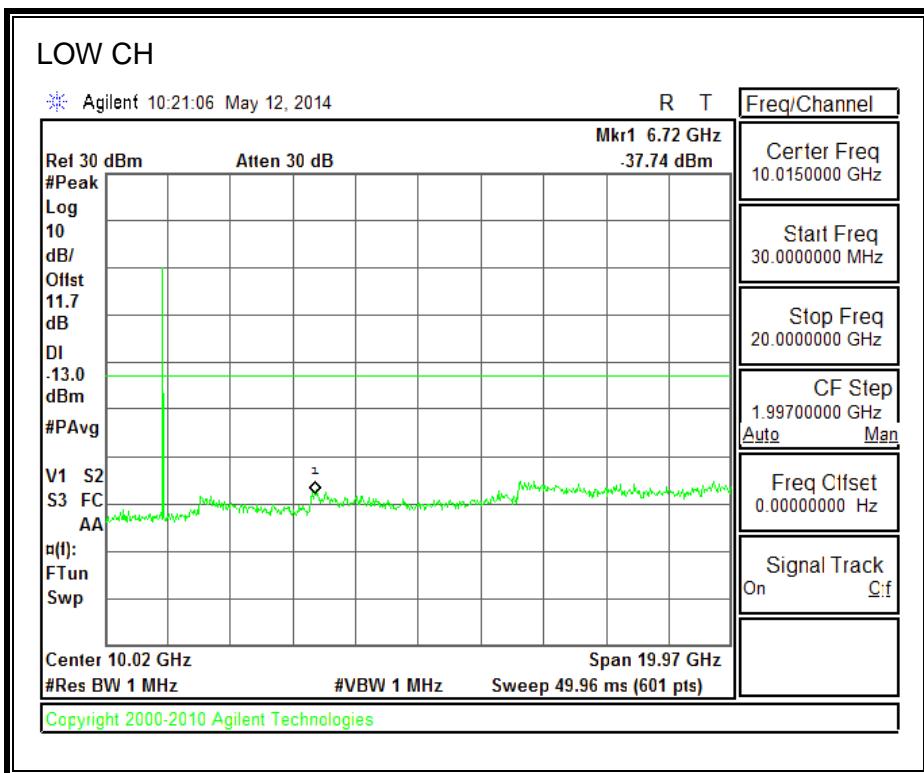


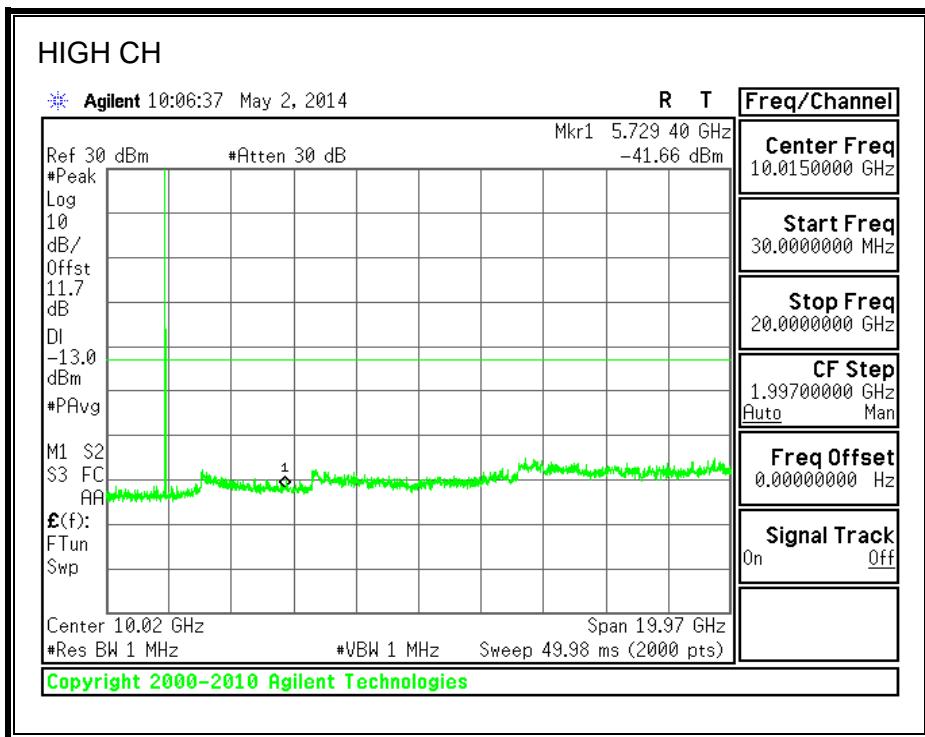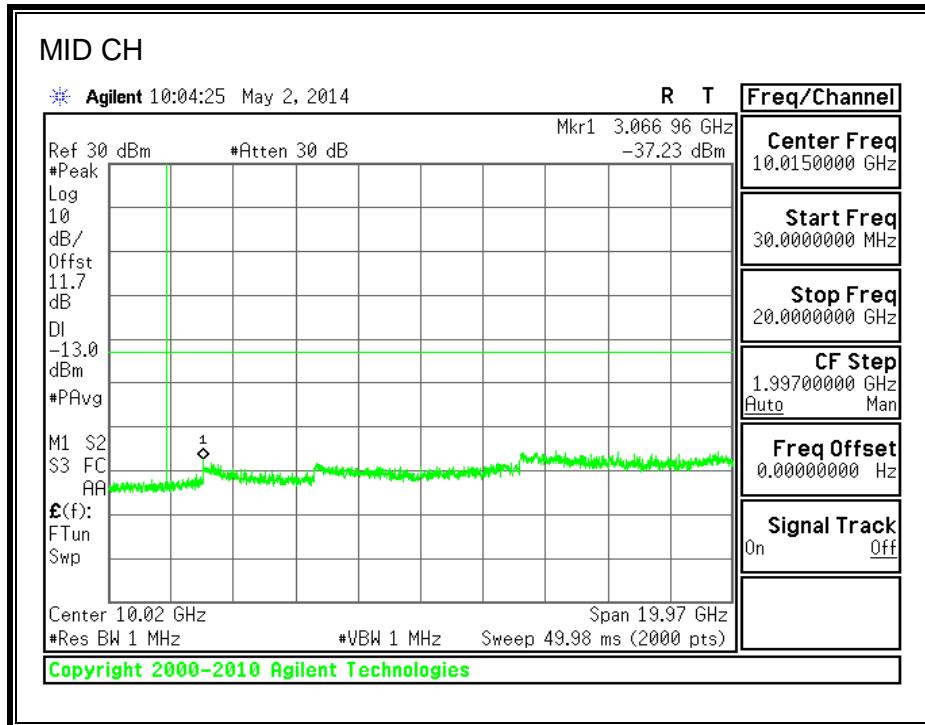


8.3.2. GSM-EGPRS



850MHz BAND

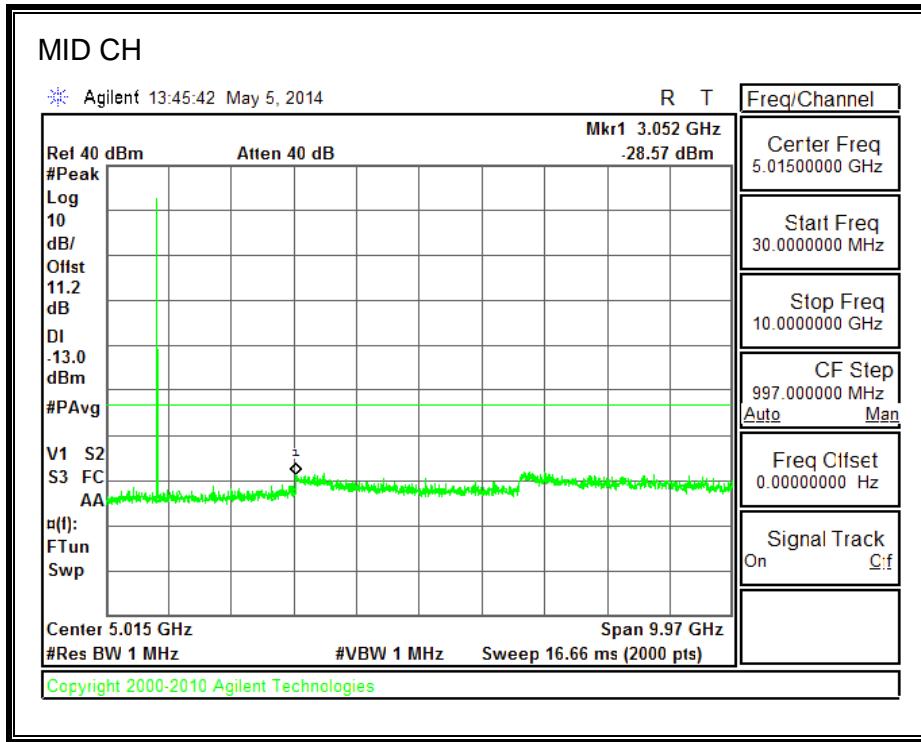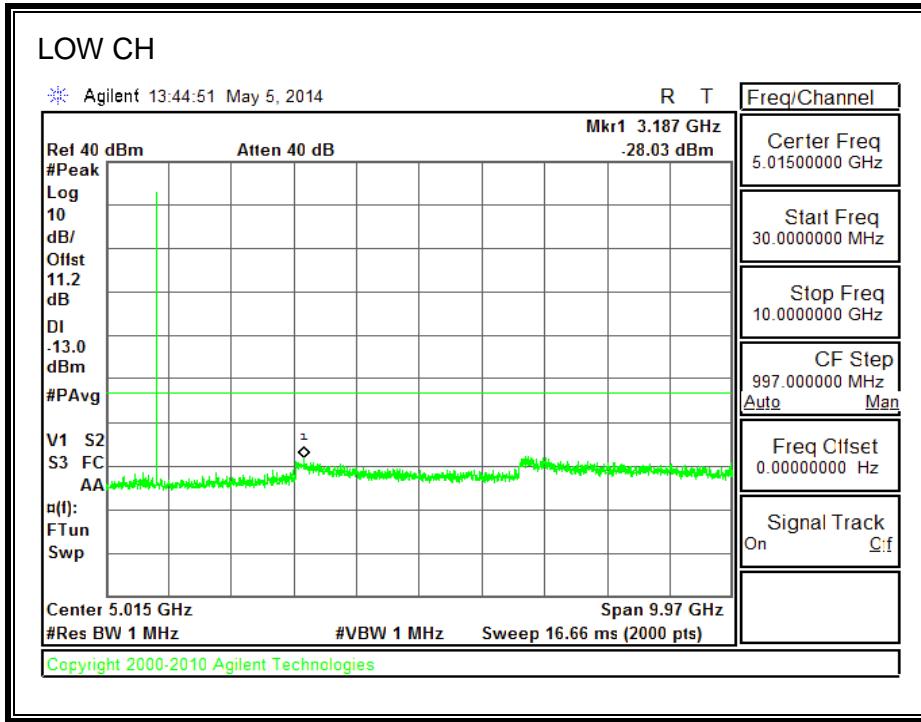

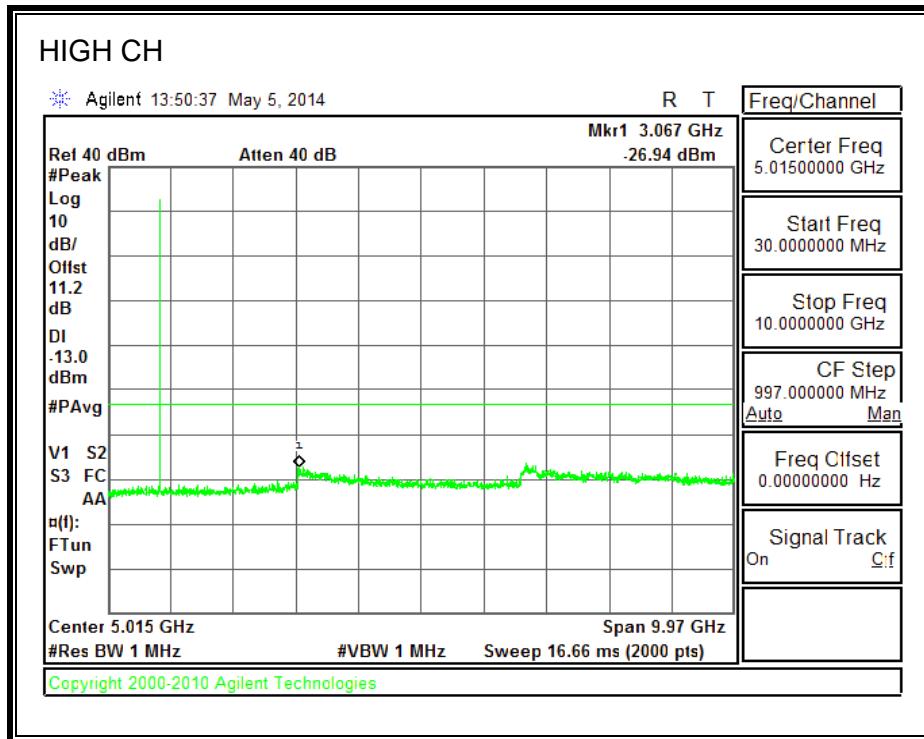



1900MHz BAND

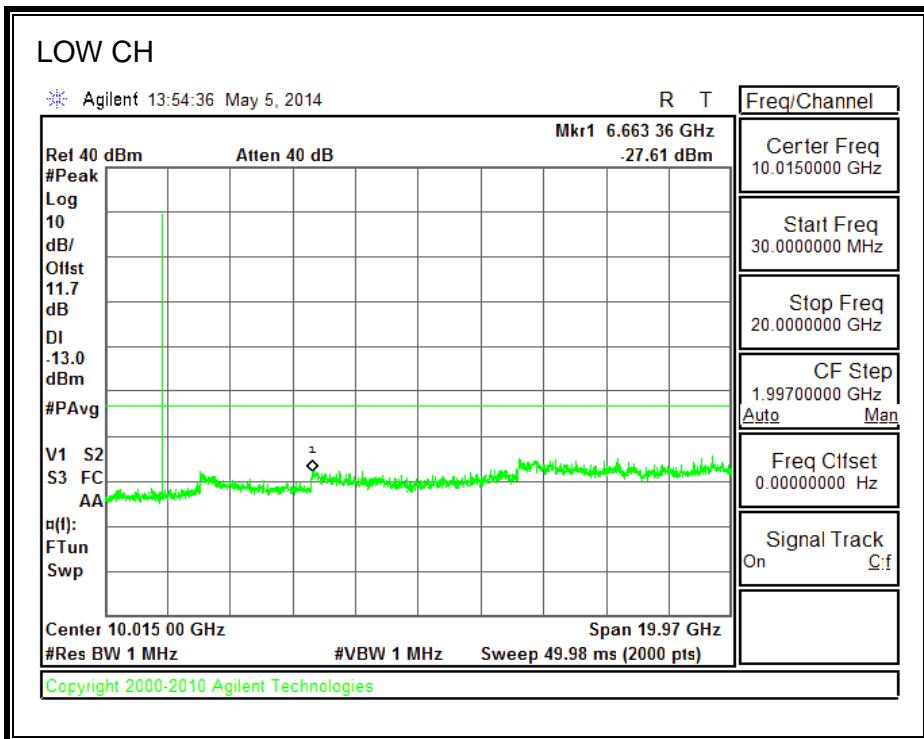


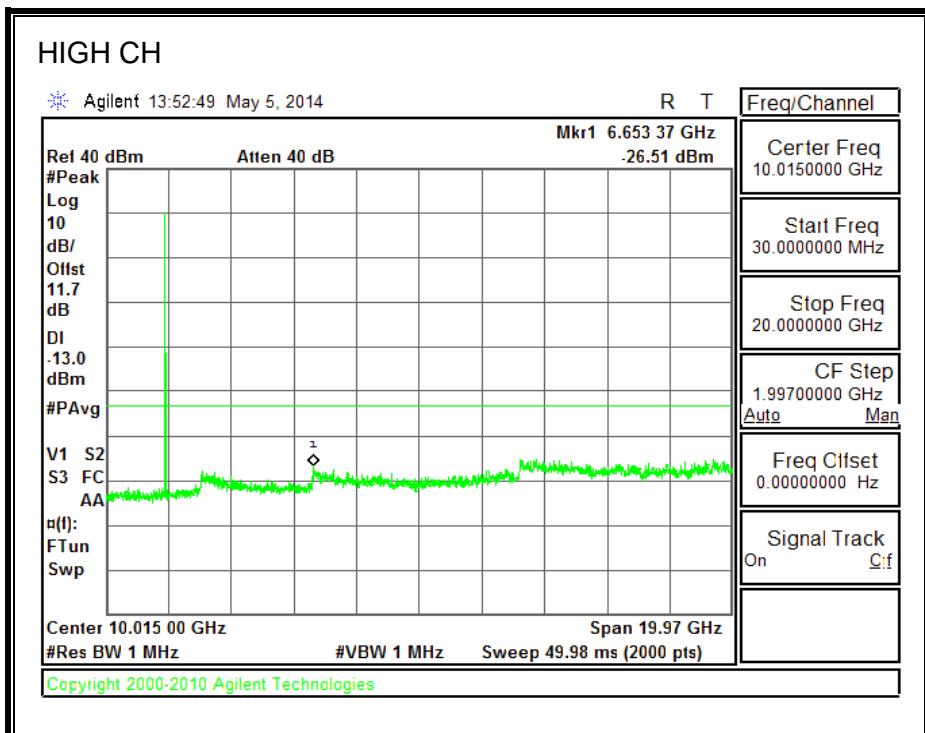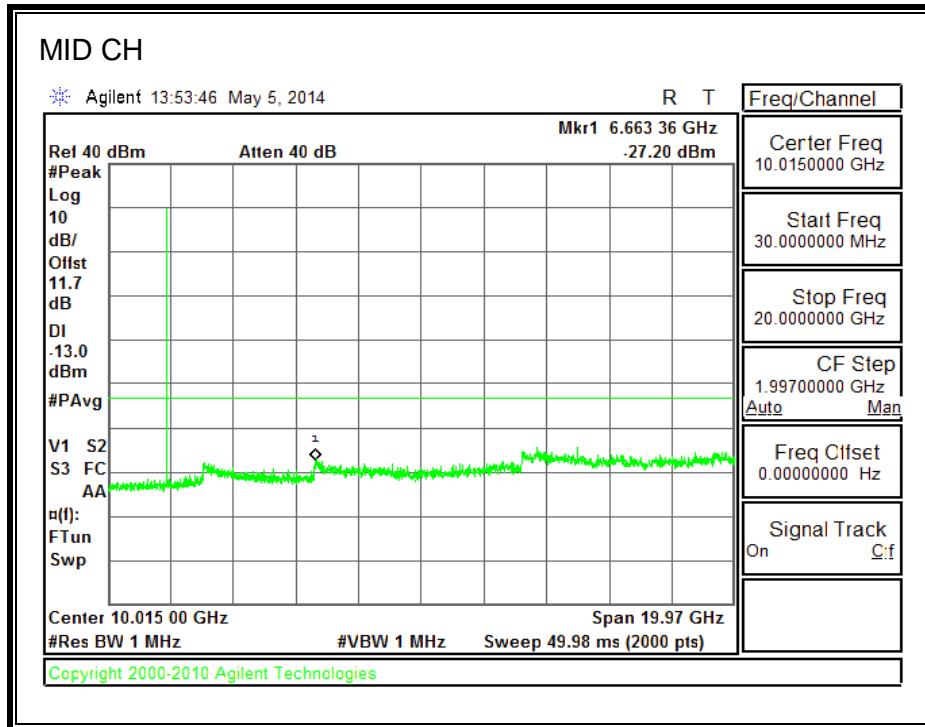


8.3.3. UMTS Rel. 99



850MHz BAND

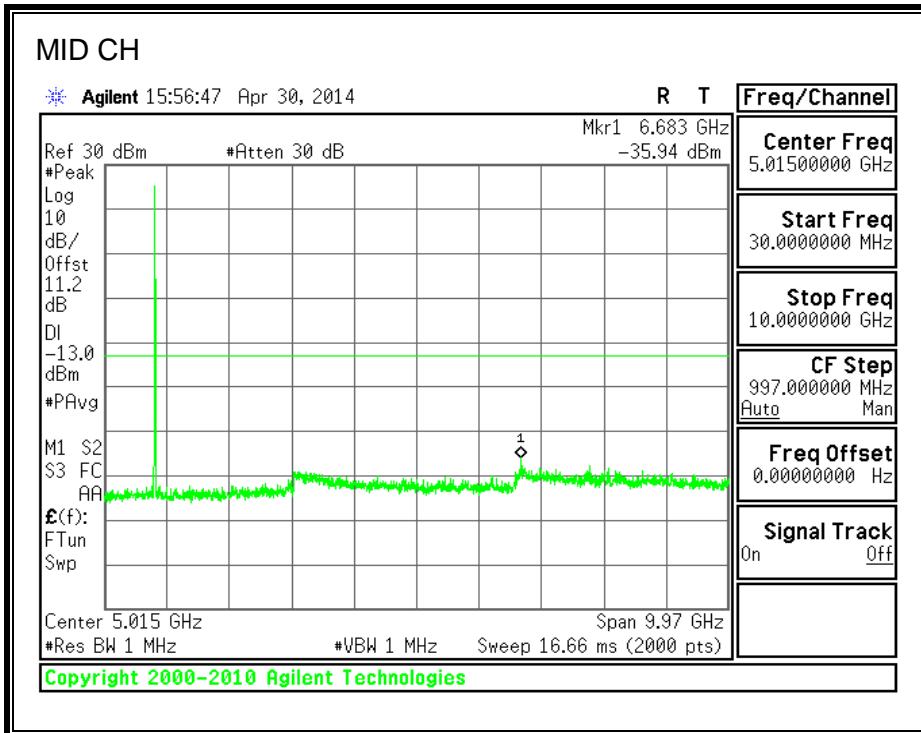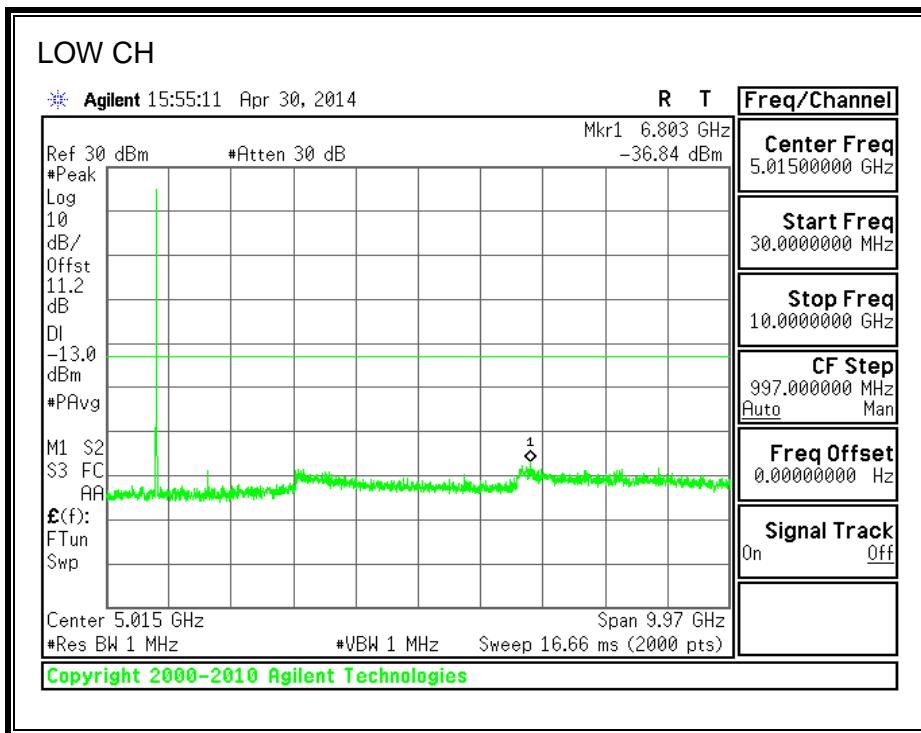


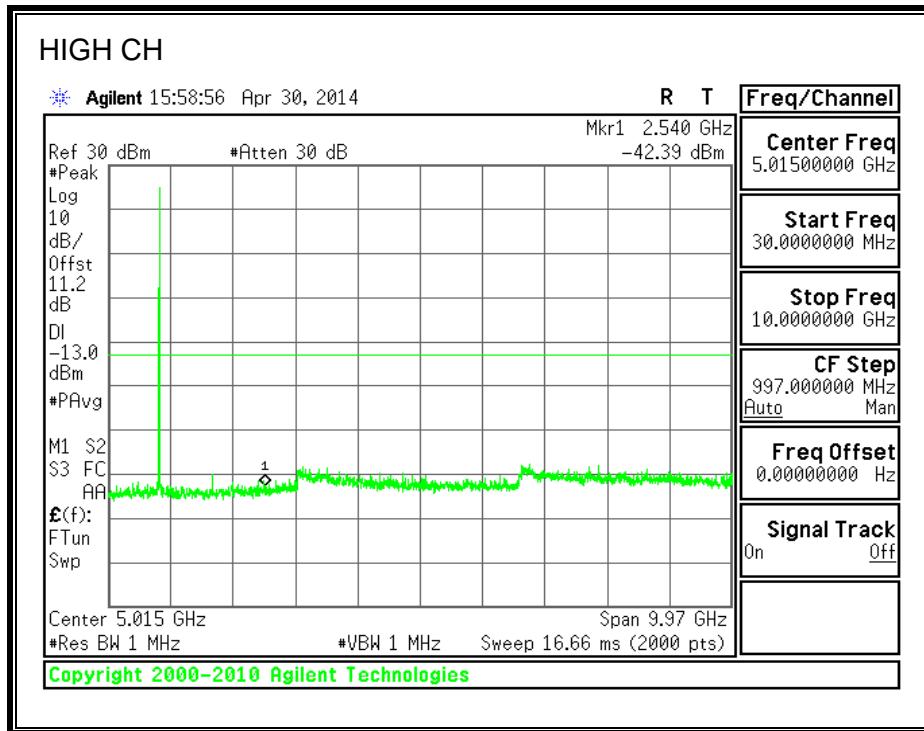



1900MHz BAND

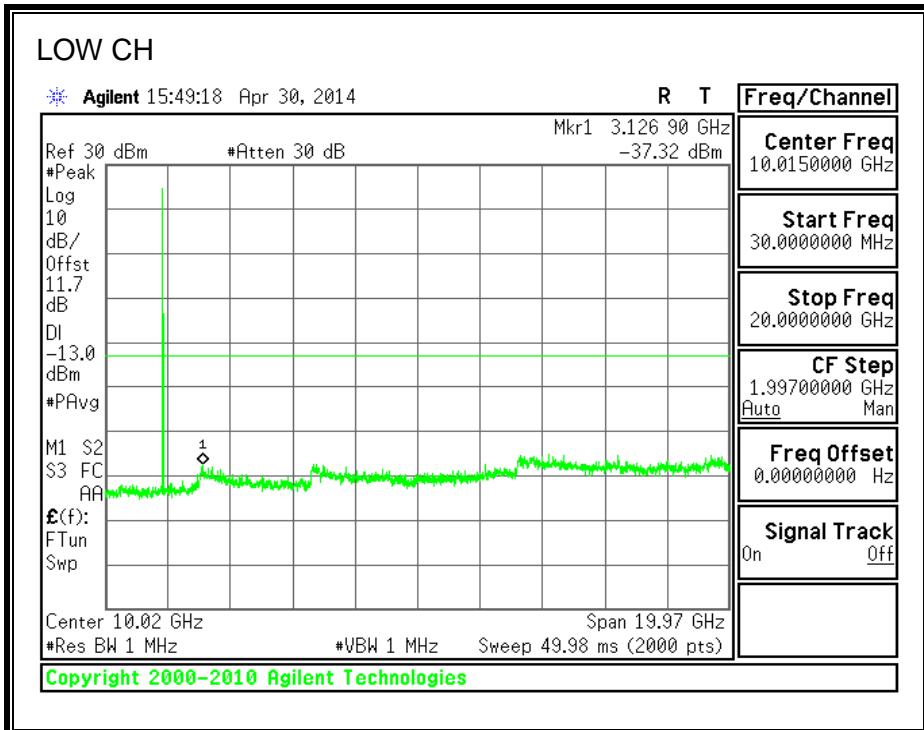

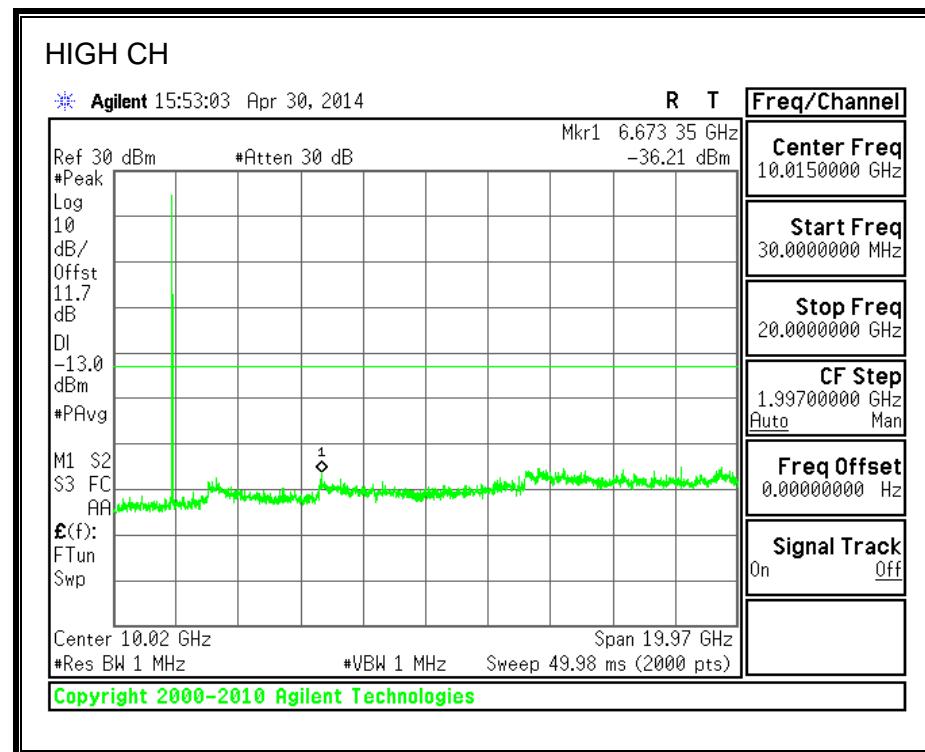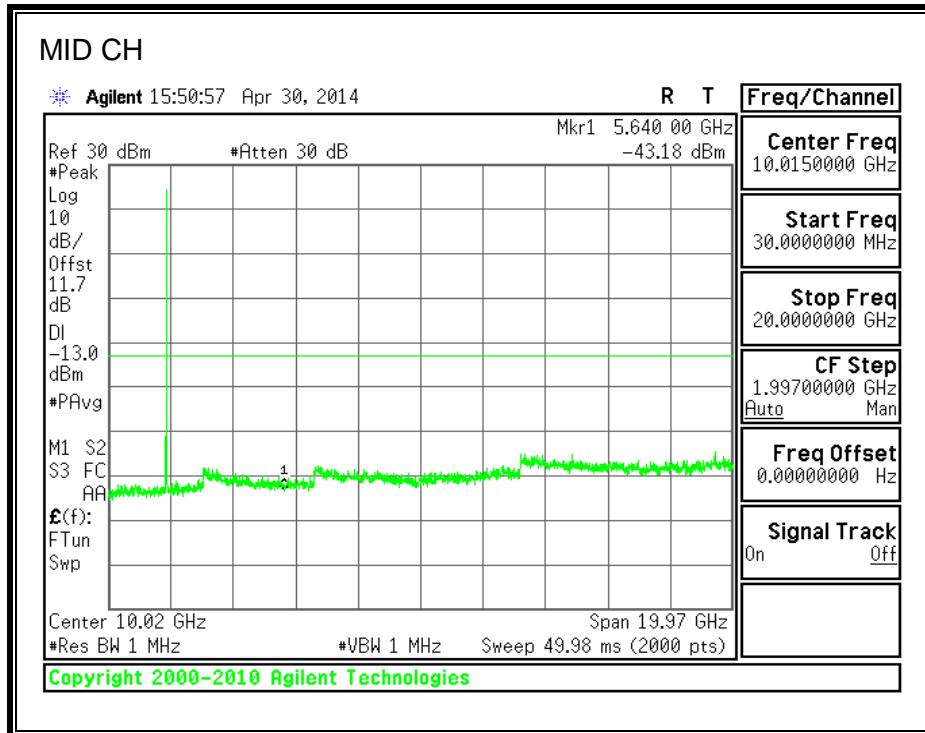



1700MHz BAND

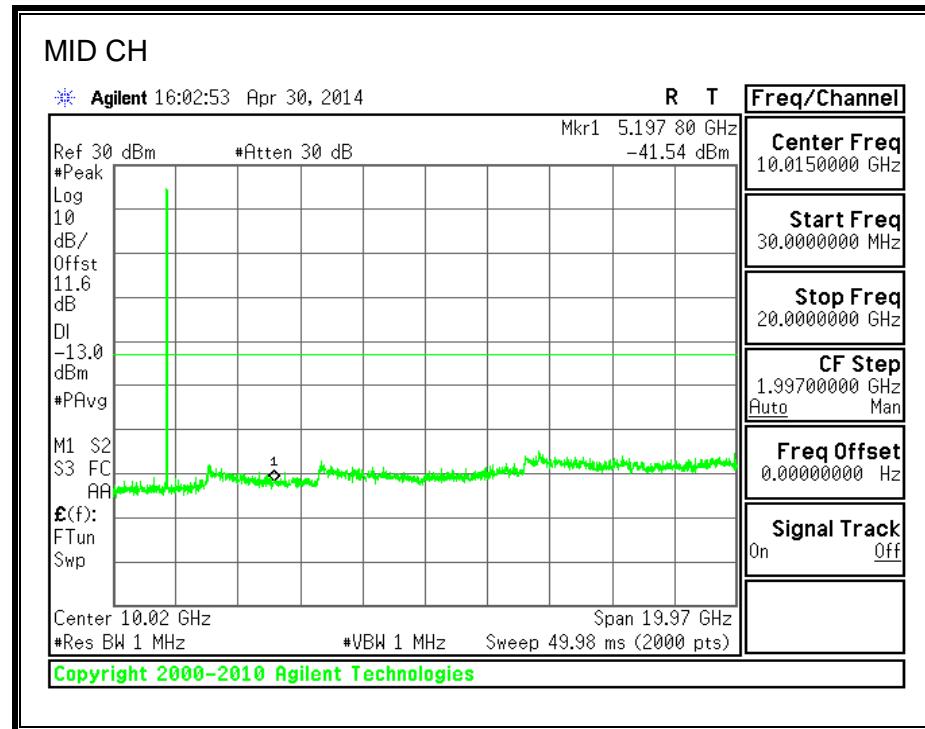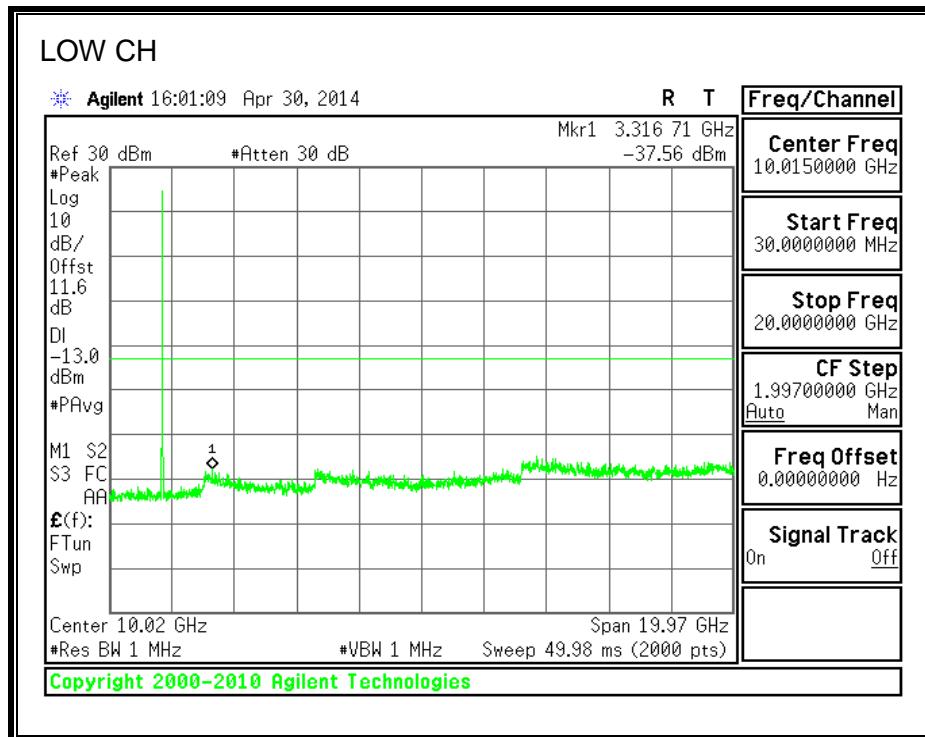


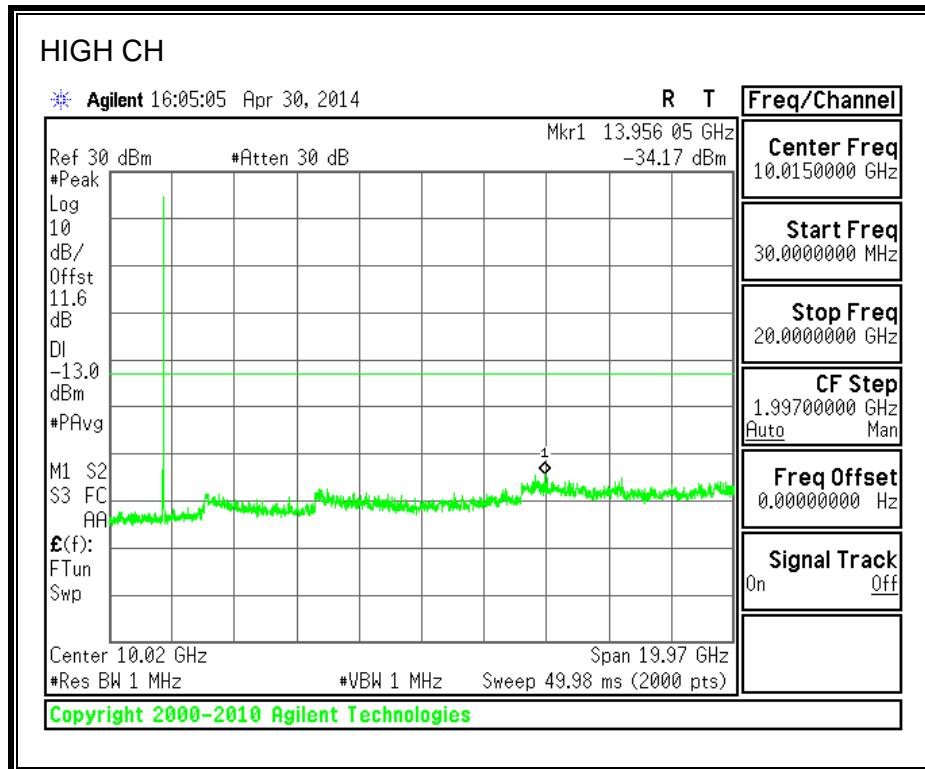


8.3.4. UMTS HSDPA



850MHz BAND

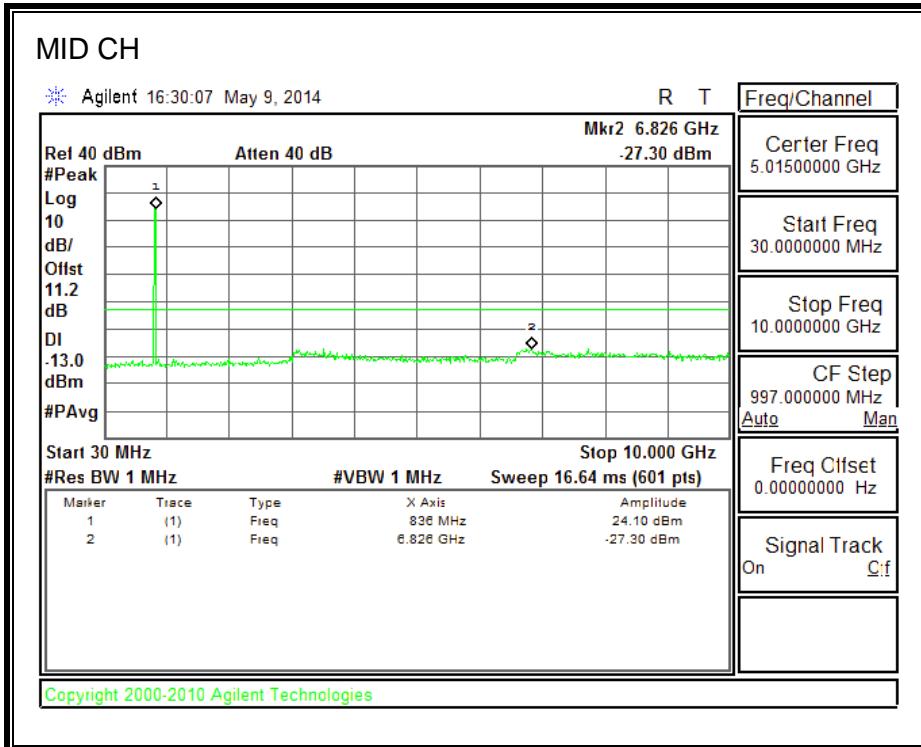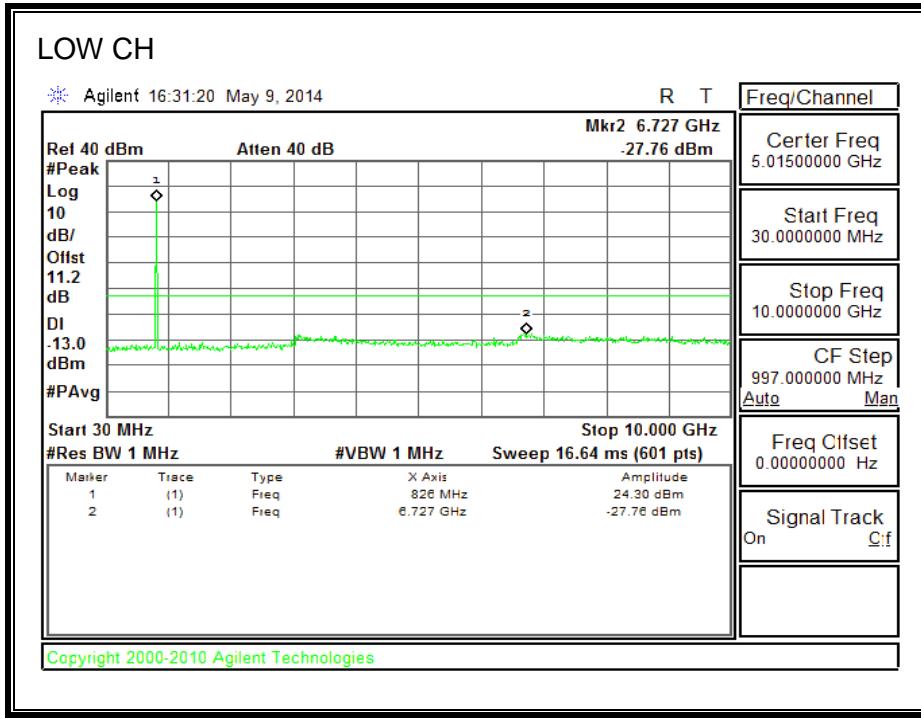


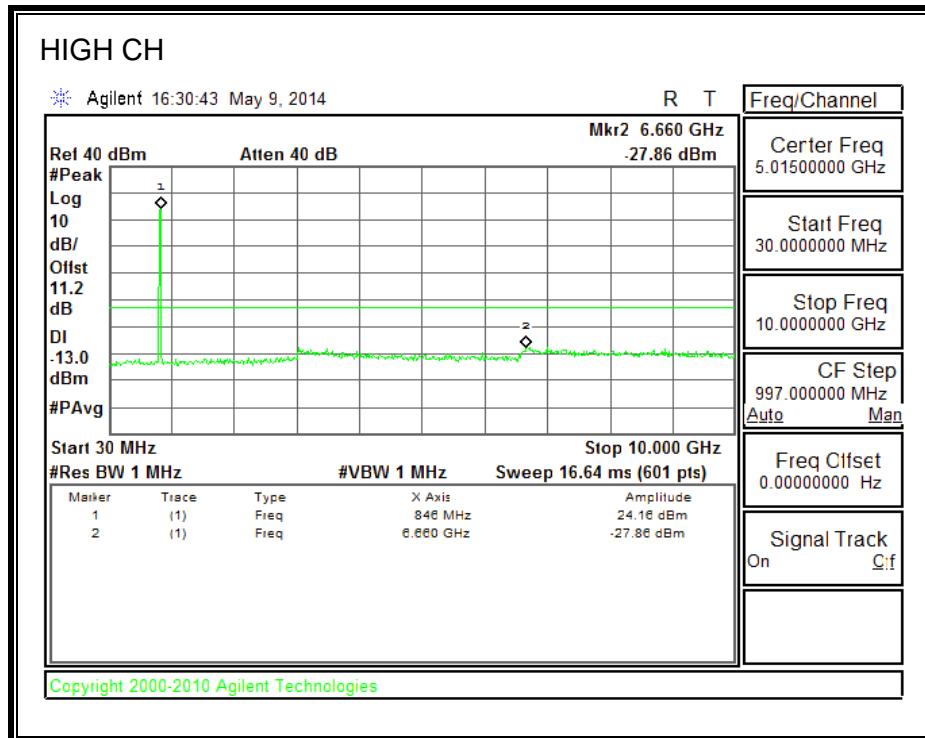



1900MHz BAND

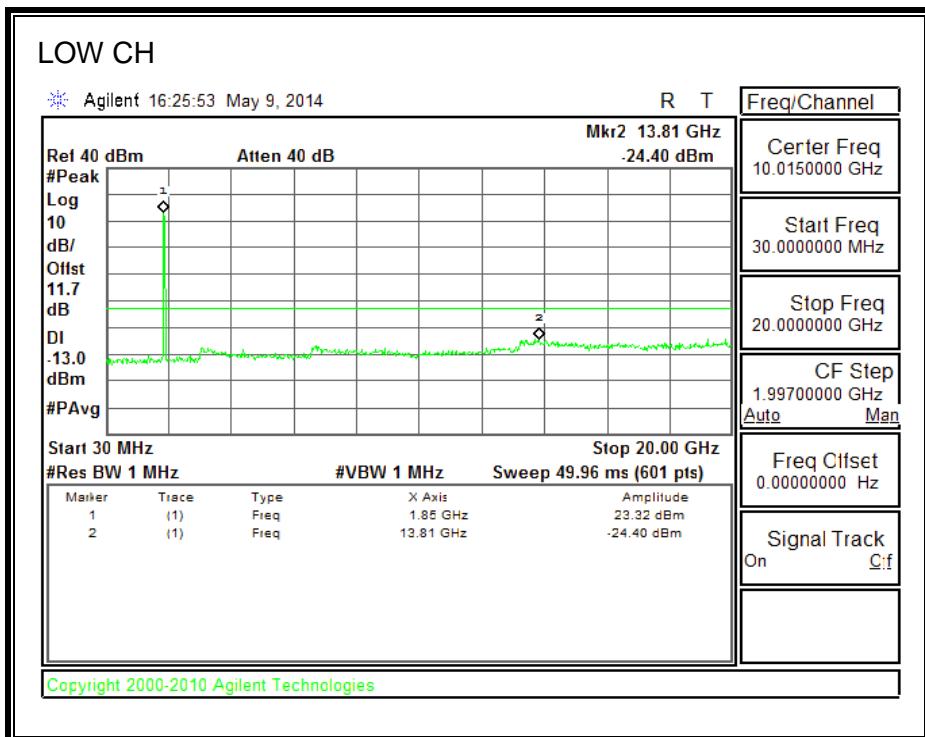

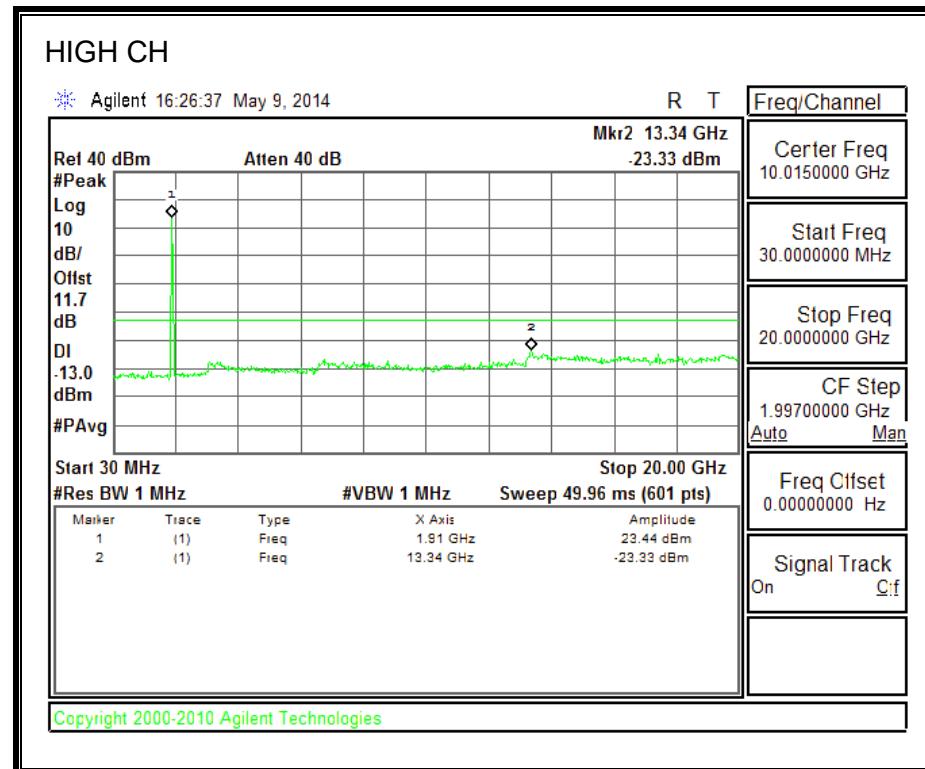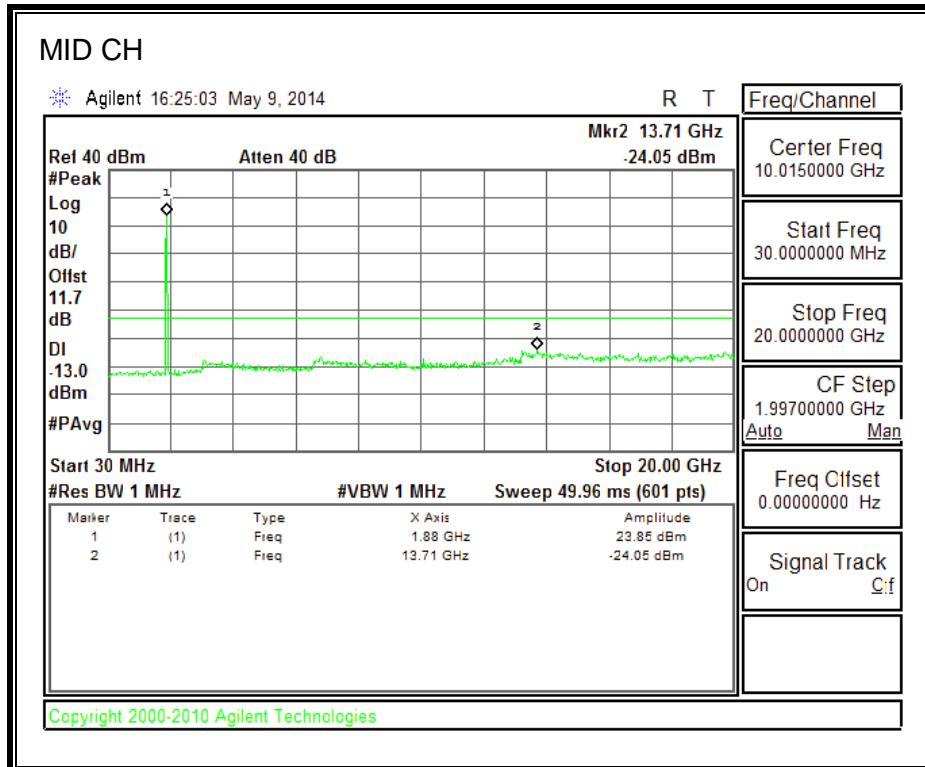



1700MHz BAND

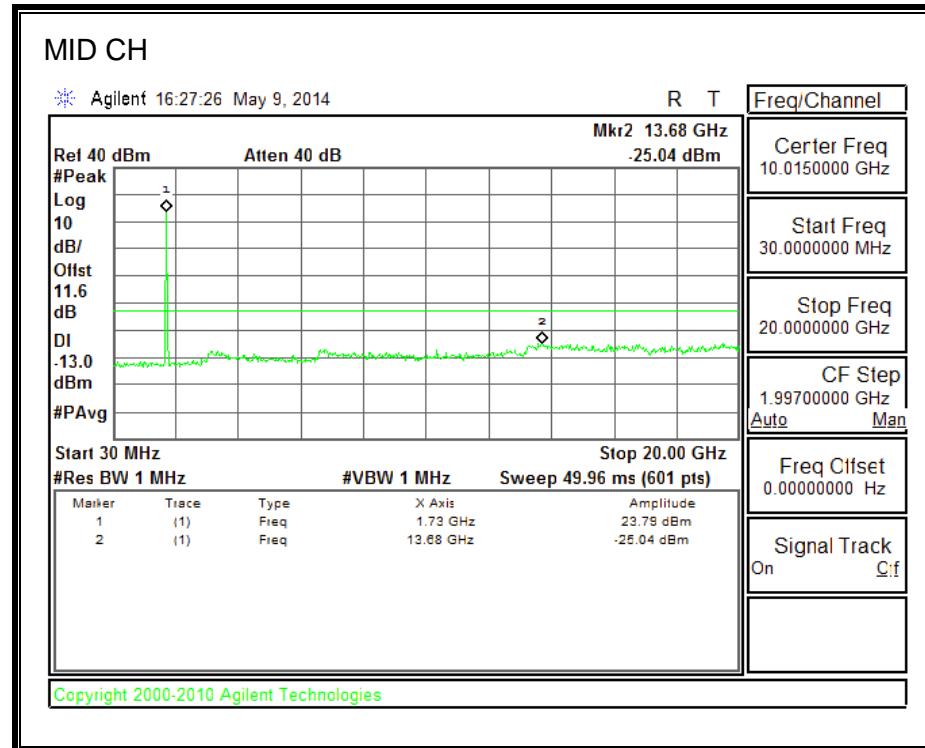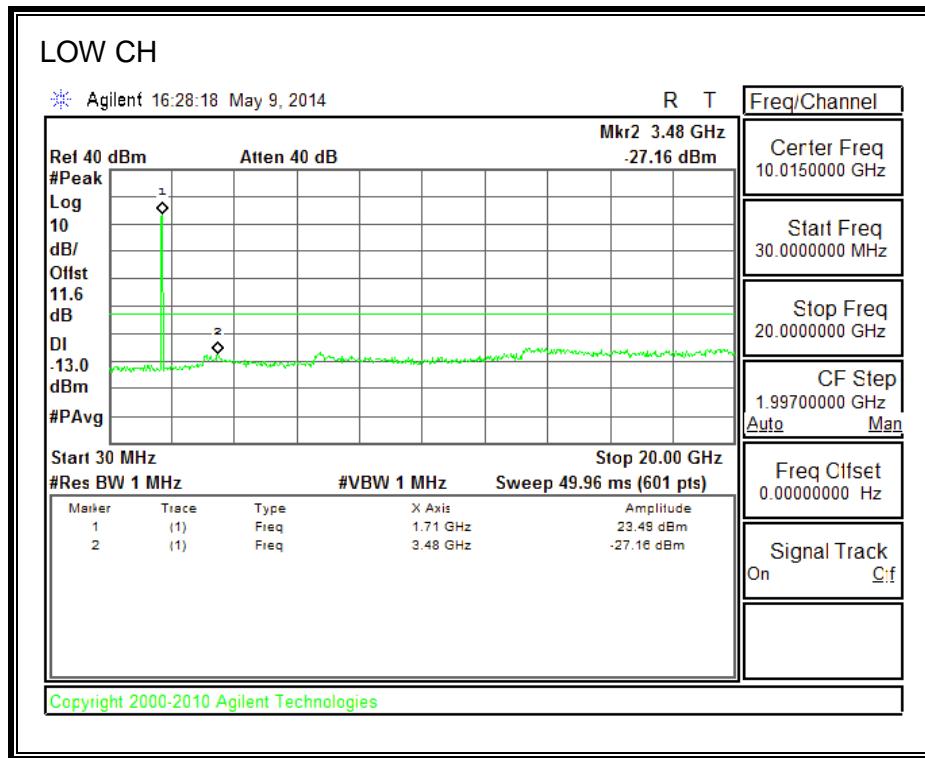


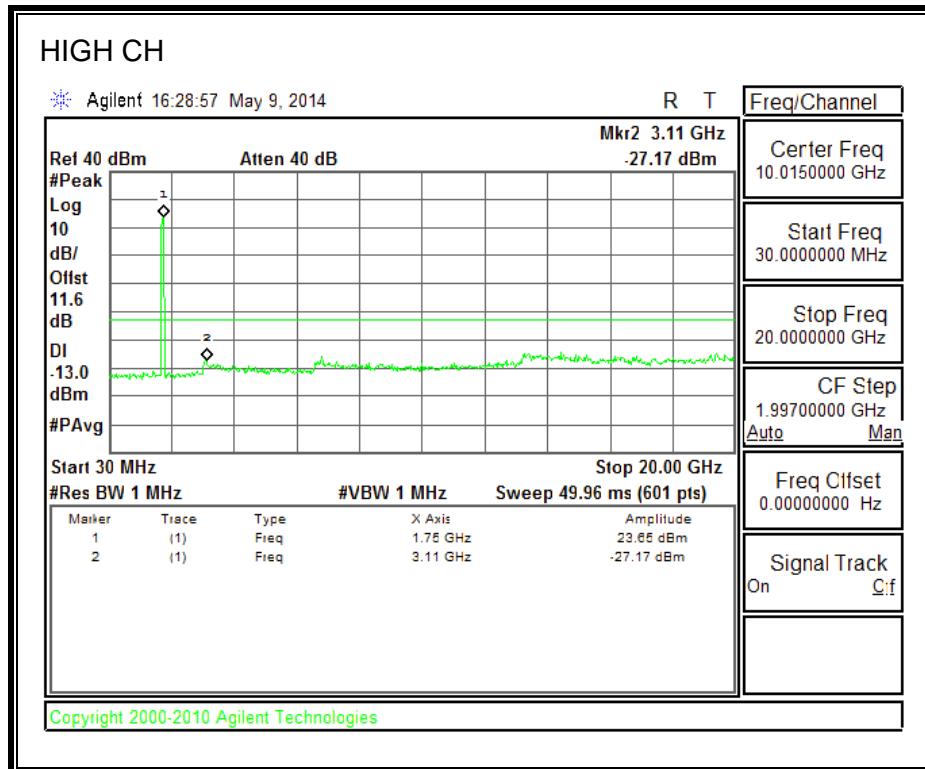


8.3.5. CDMA2000 1xRTT



850MHz BAND

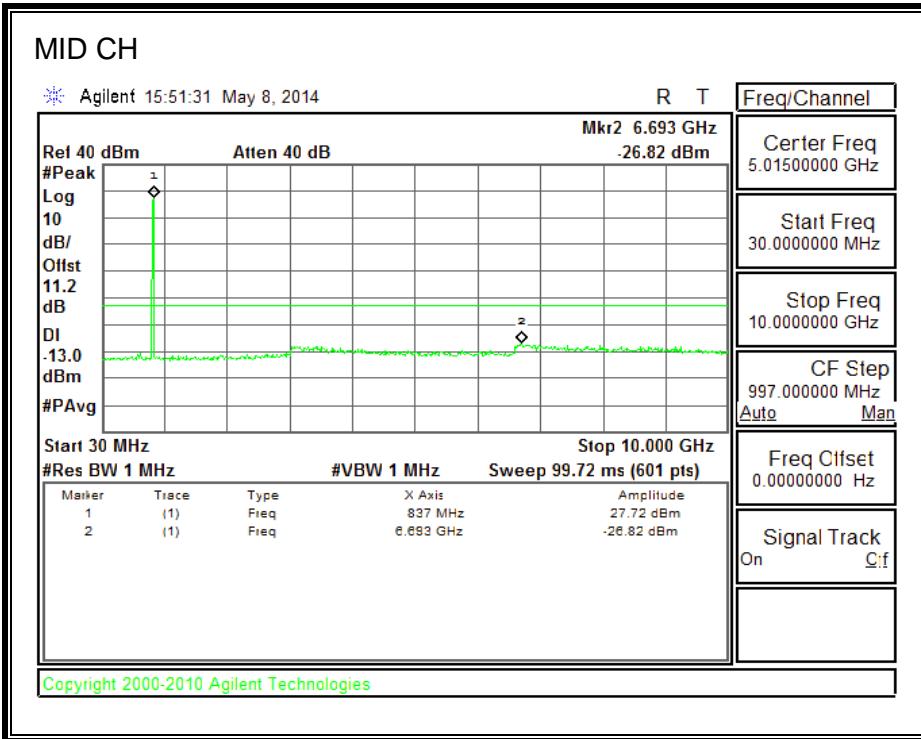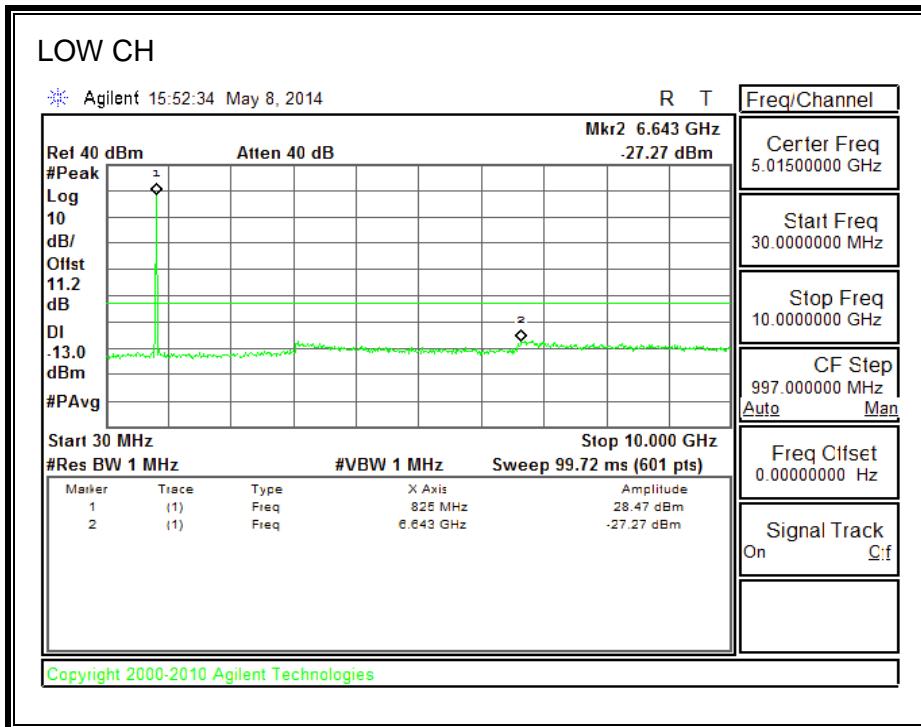


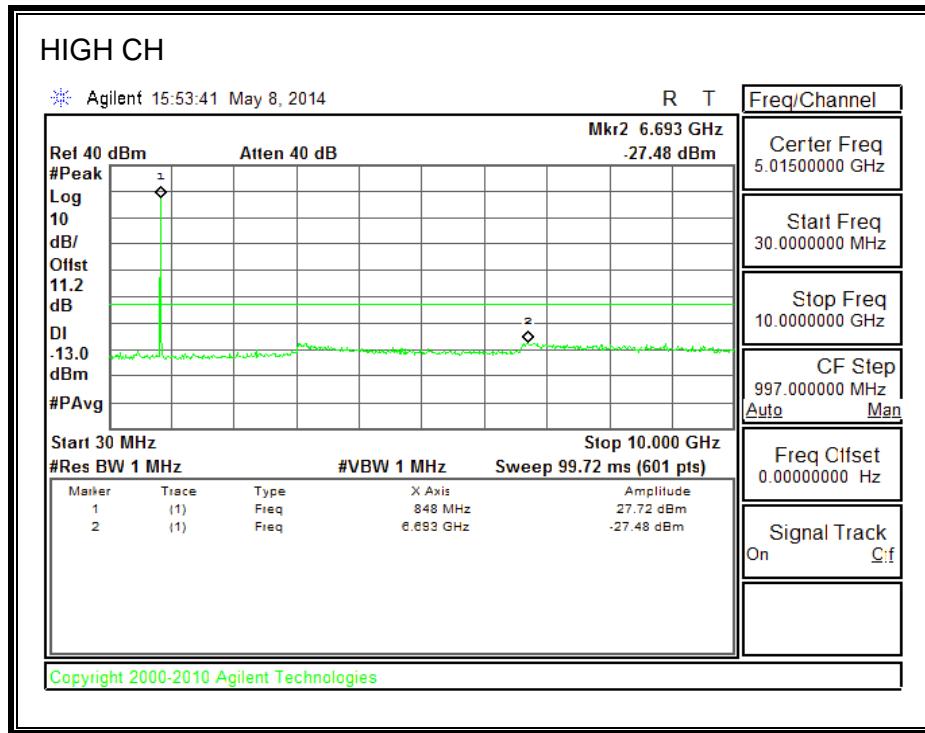



1900MHz BAND

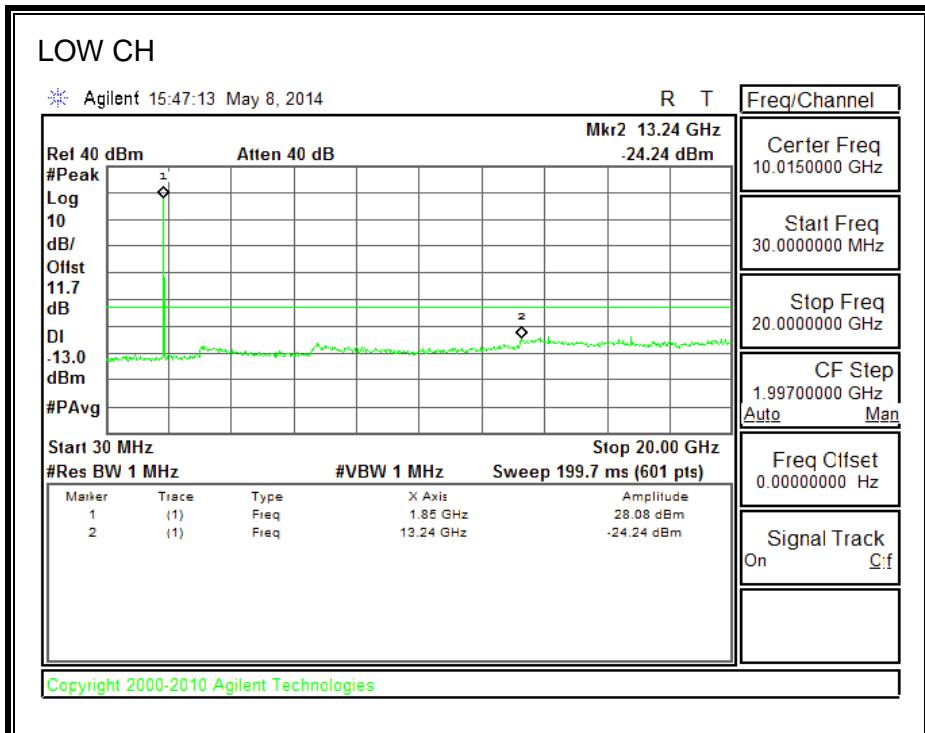

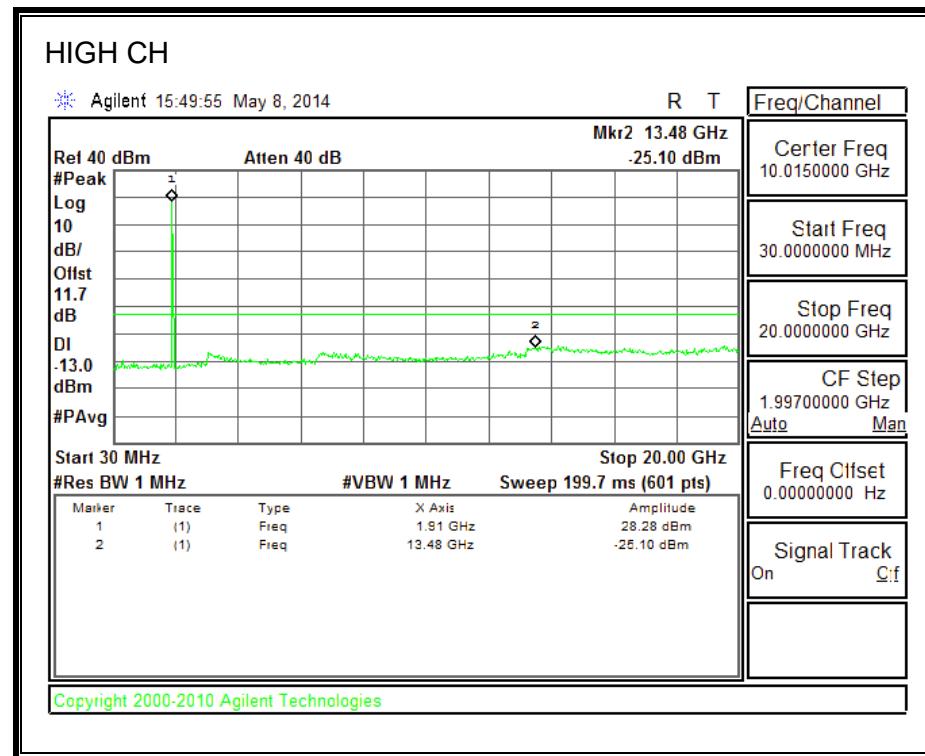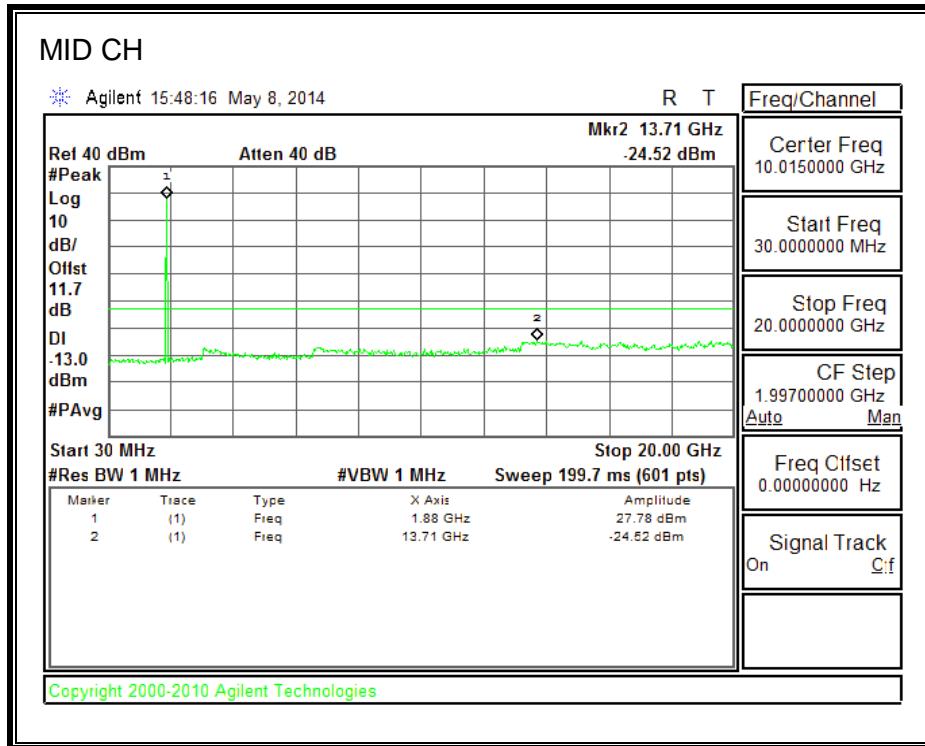




1700MHz BAND

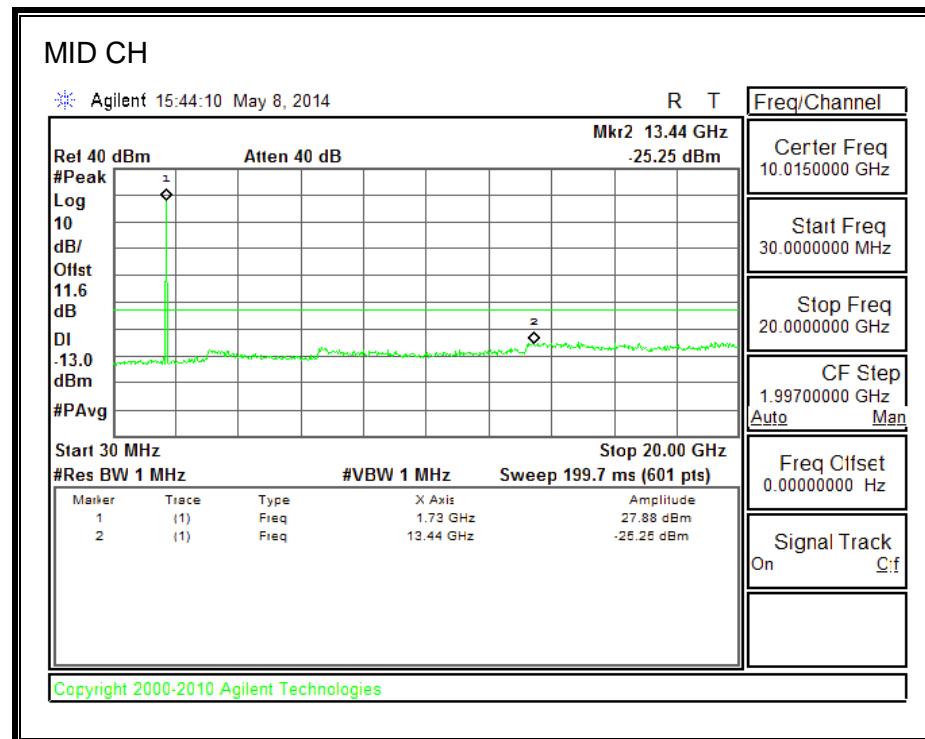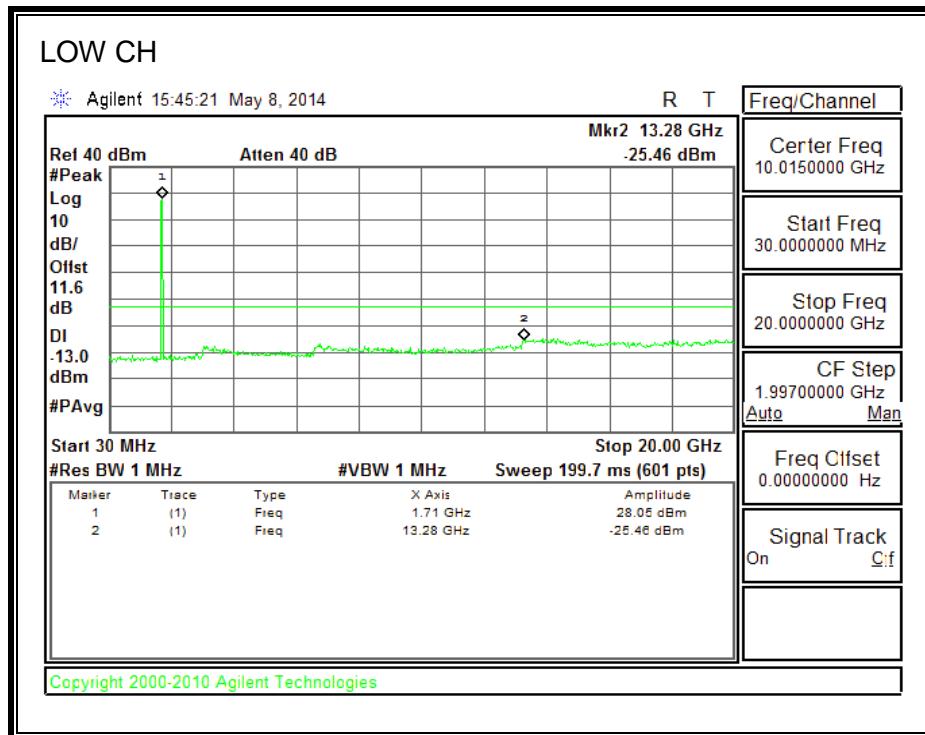

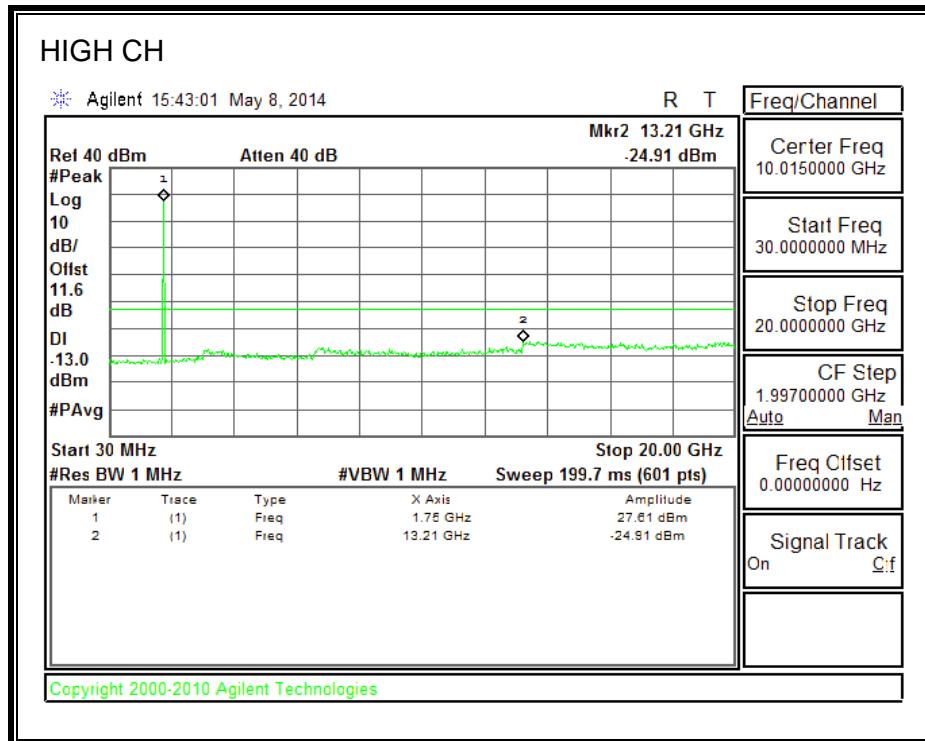



800MHz SECONDARY BAND

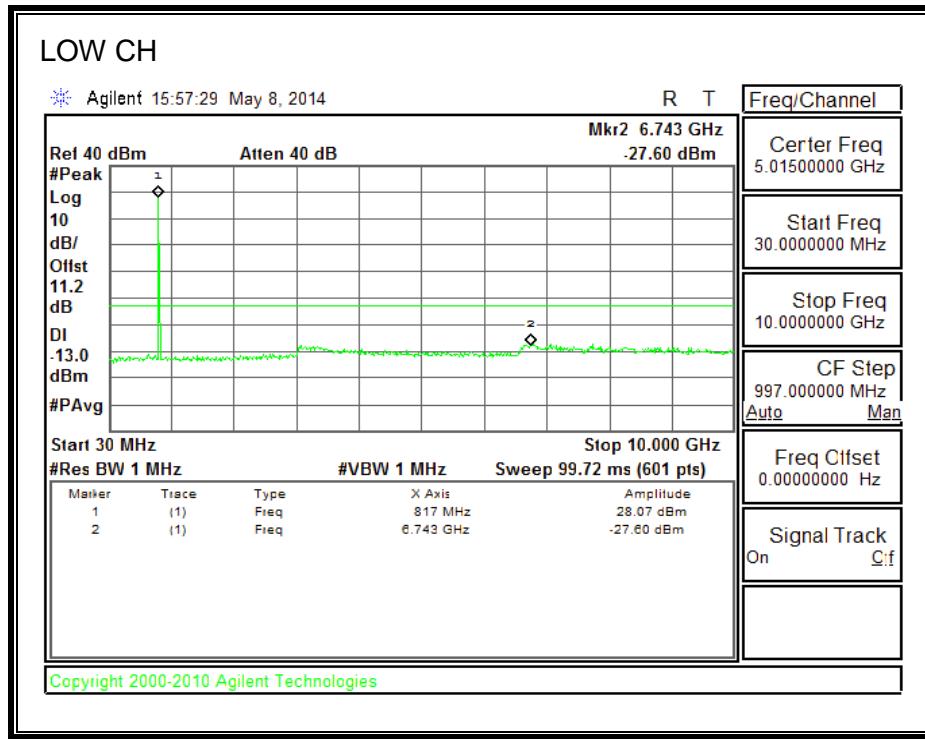


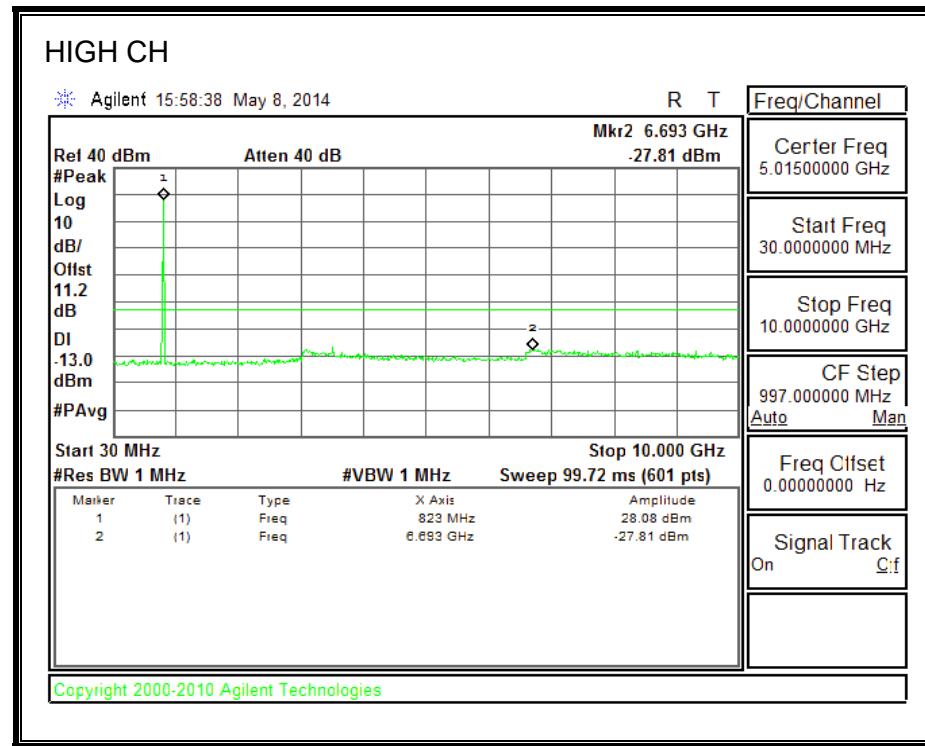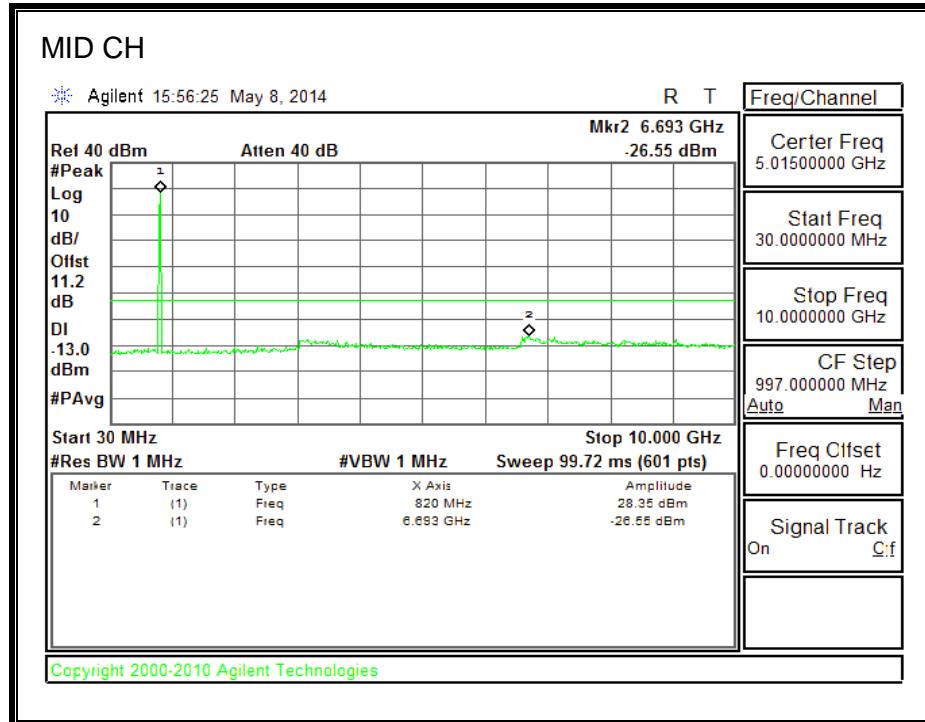


8.3.6. CDMA2000 EVDO Rev. A



850MHz BAND

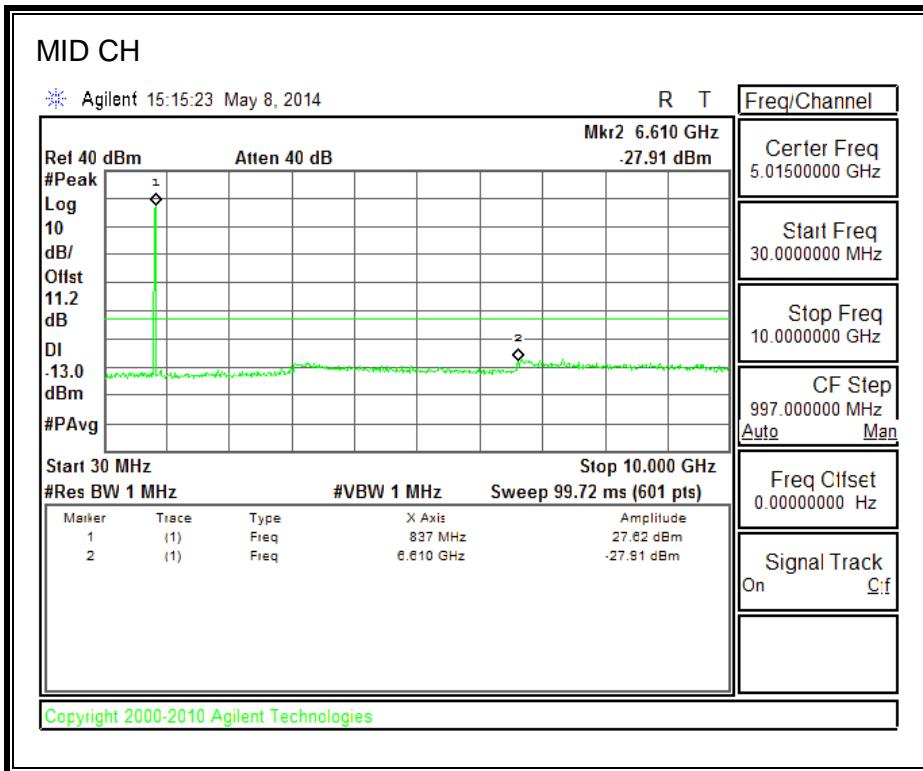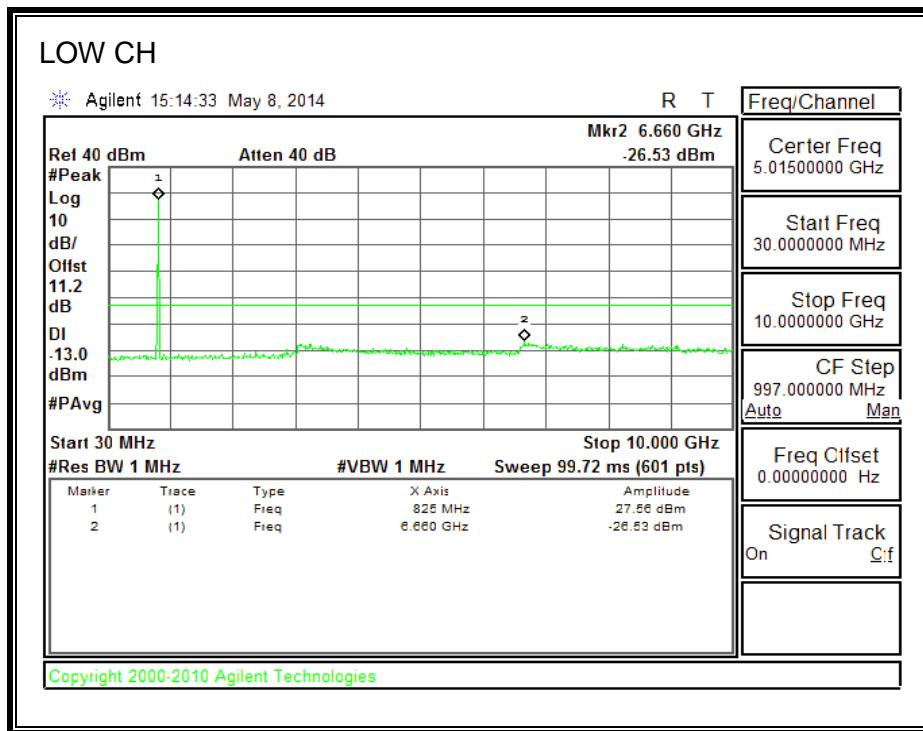


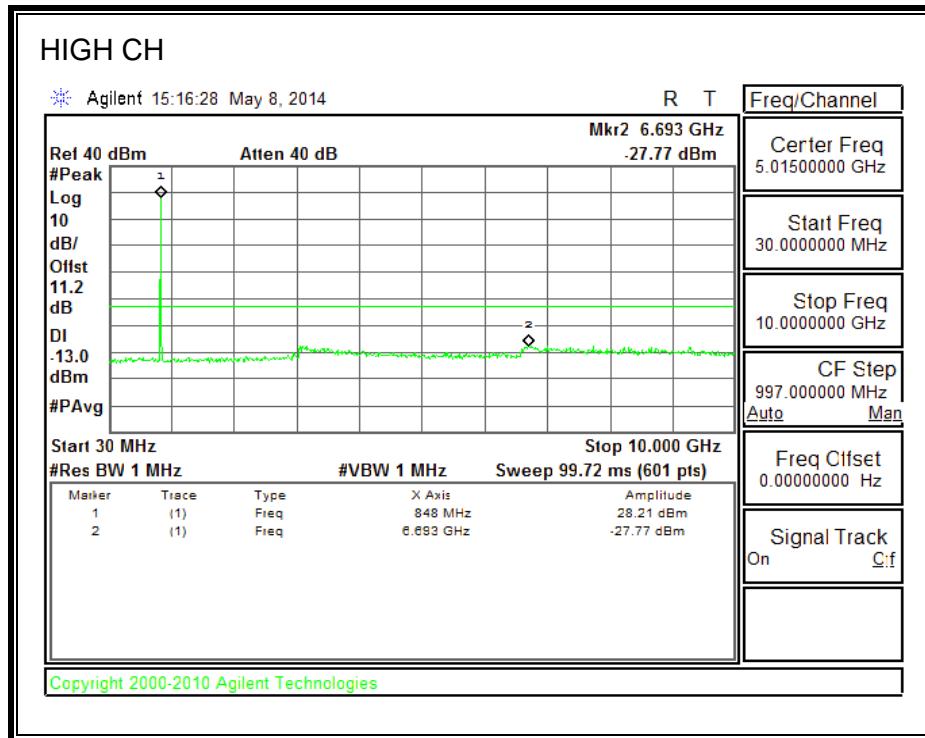



1900MHz BAND

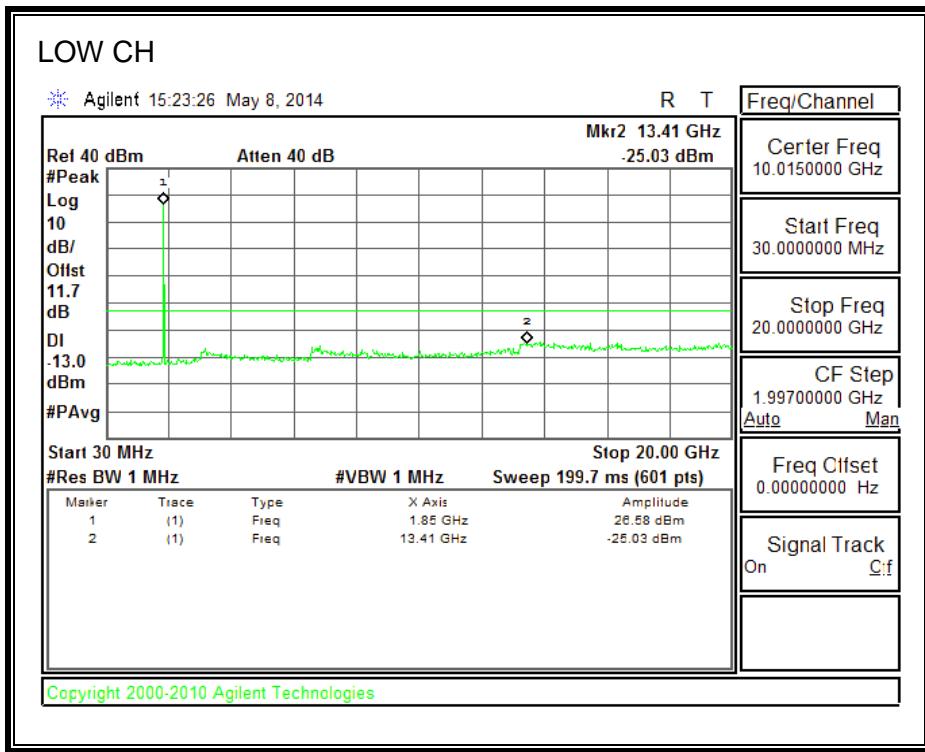

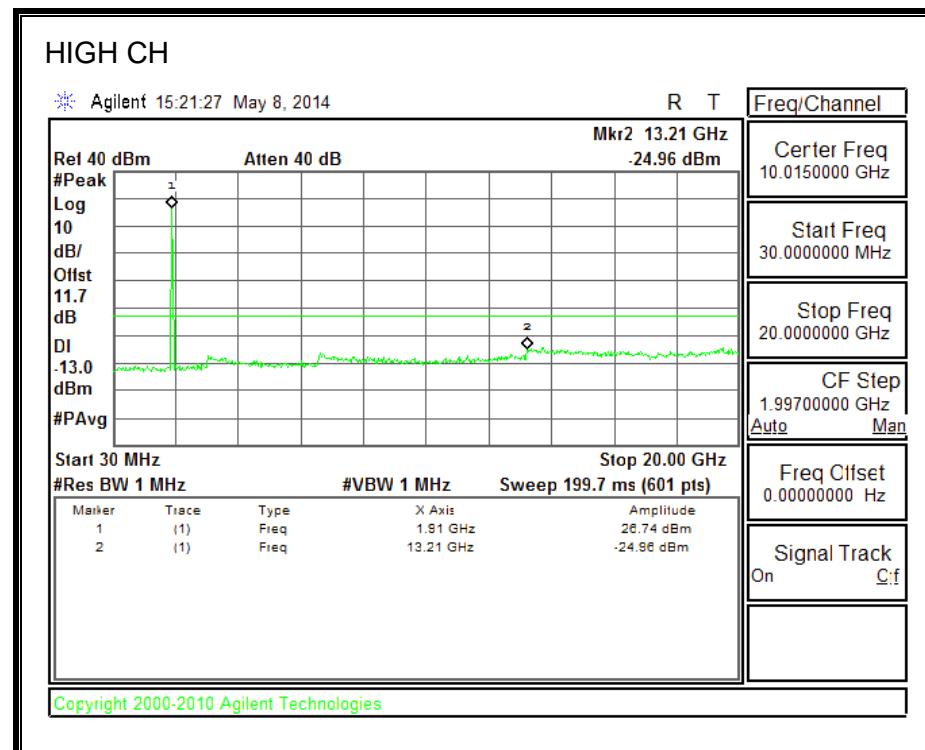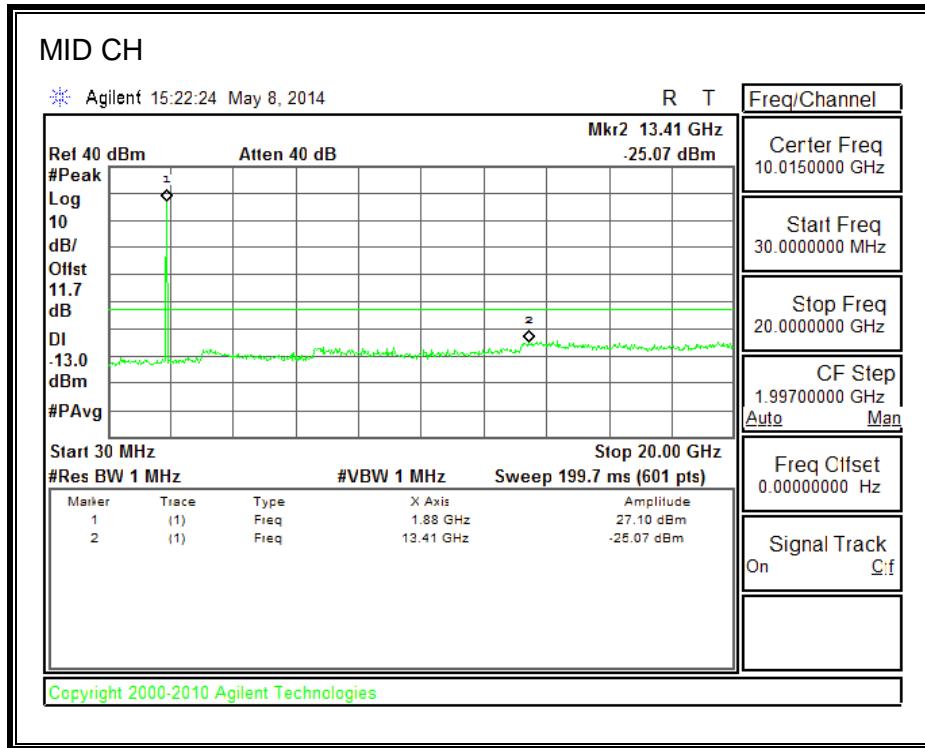




1700MHz BAND

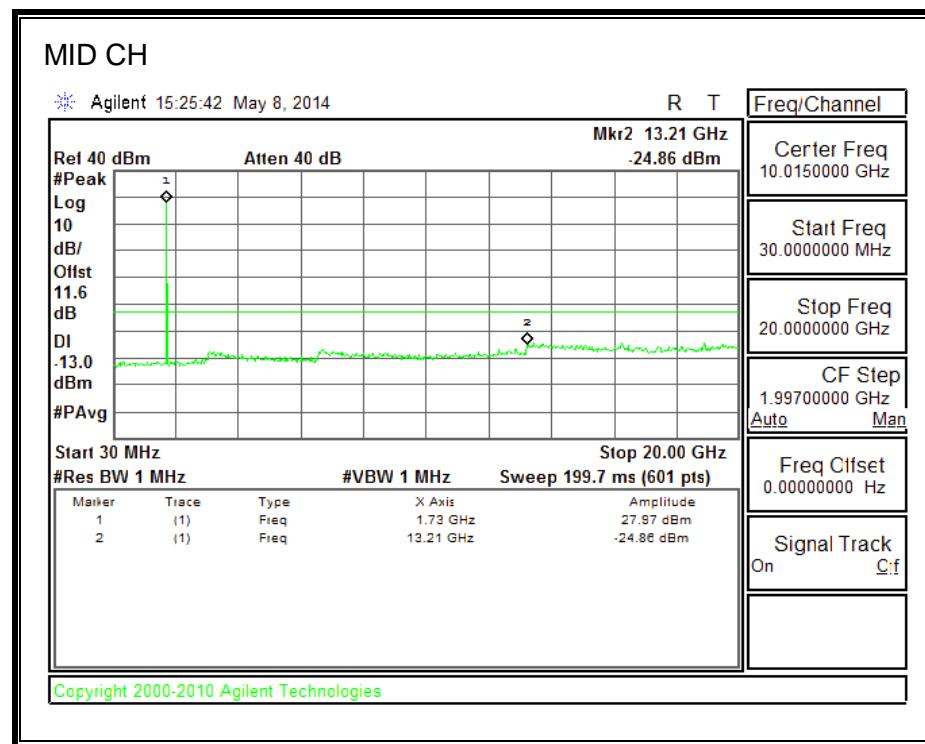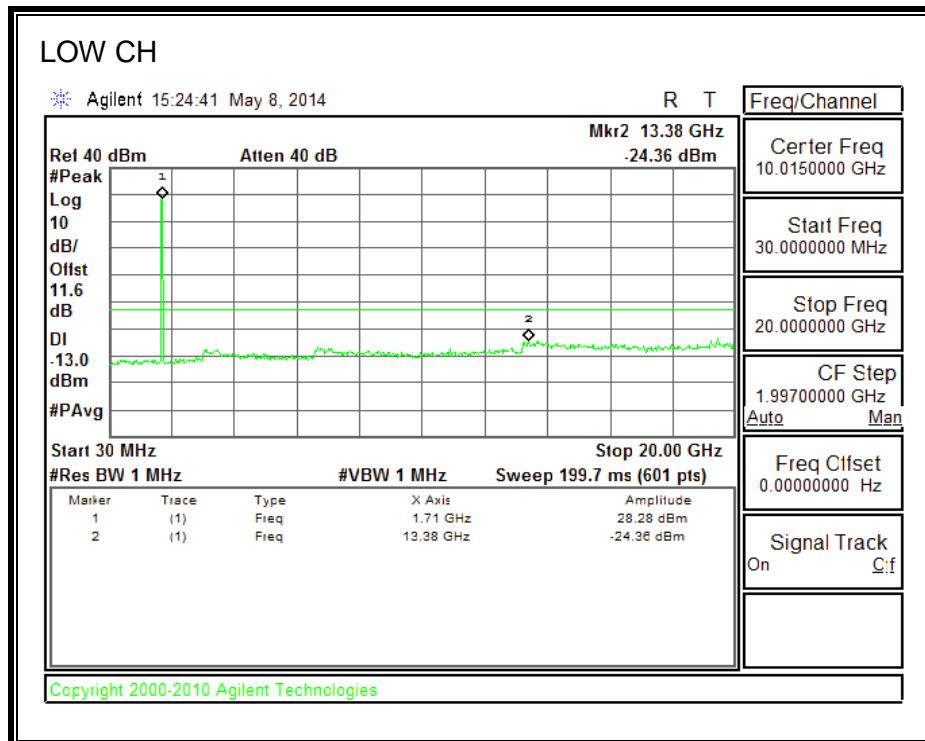

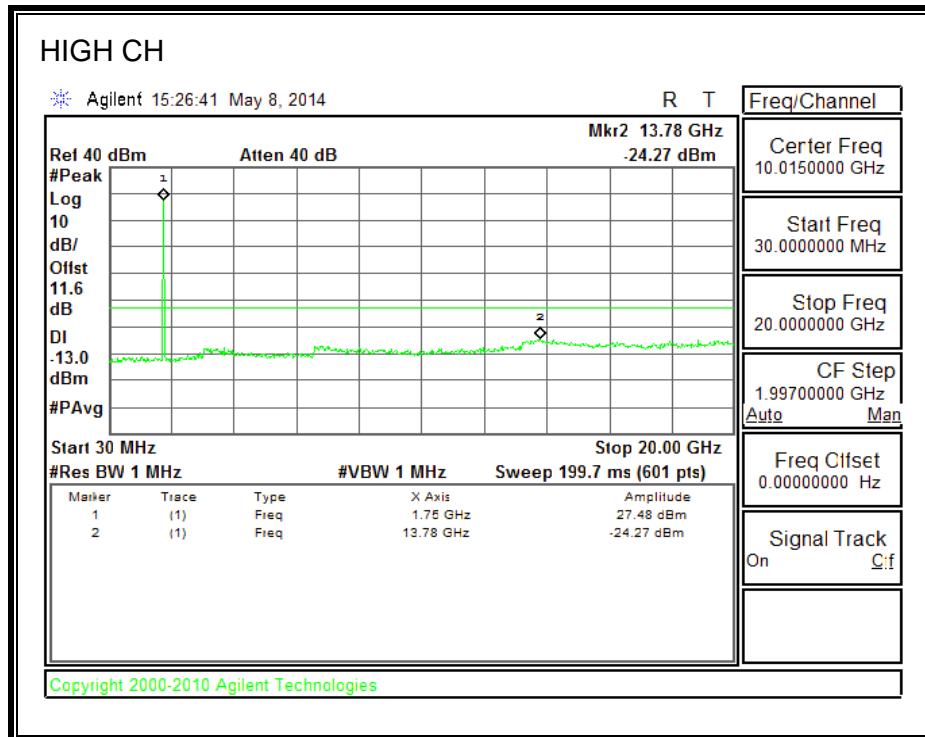

800MHz SECONDARY BAND

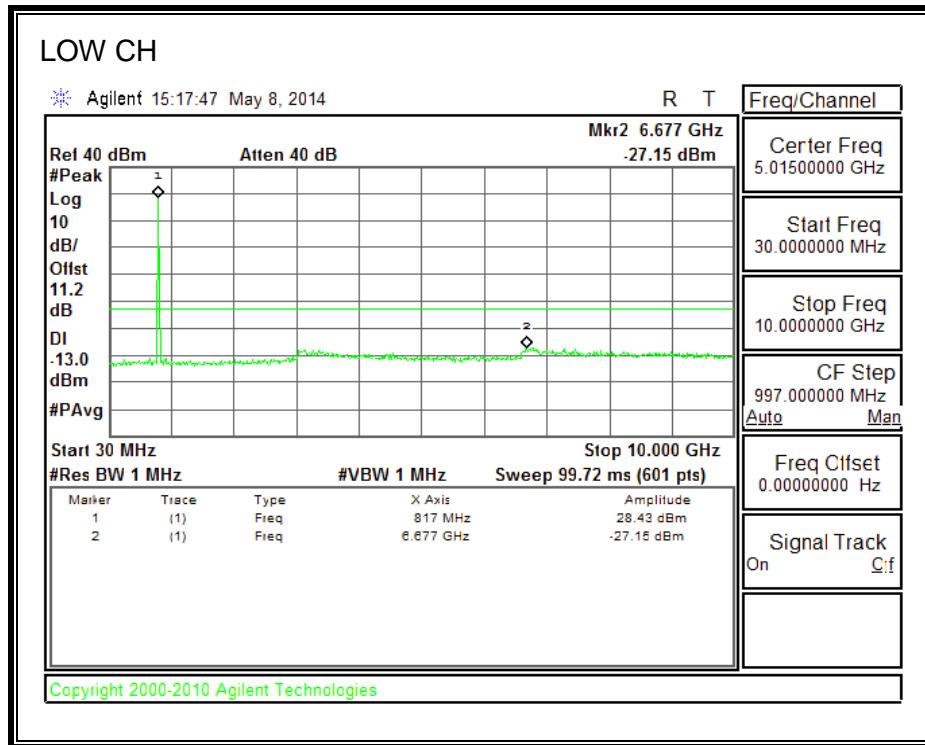

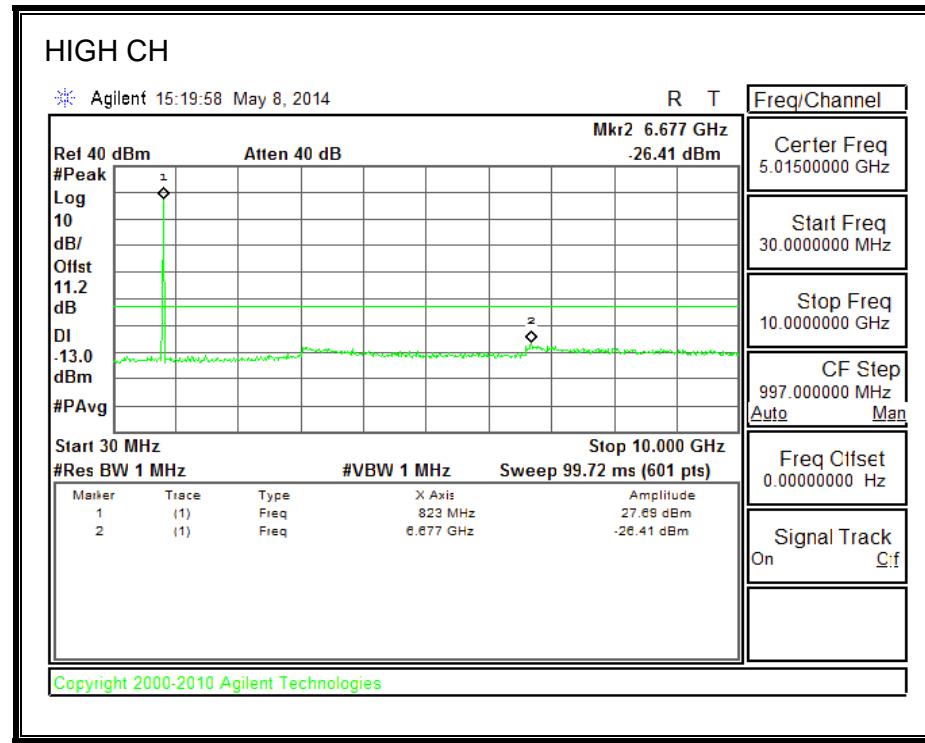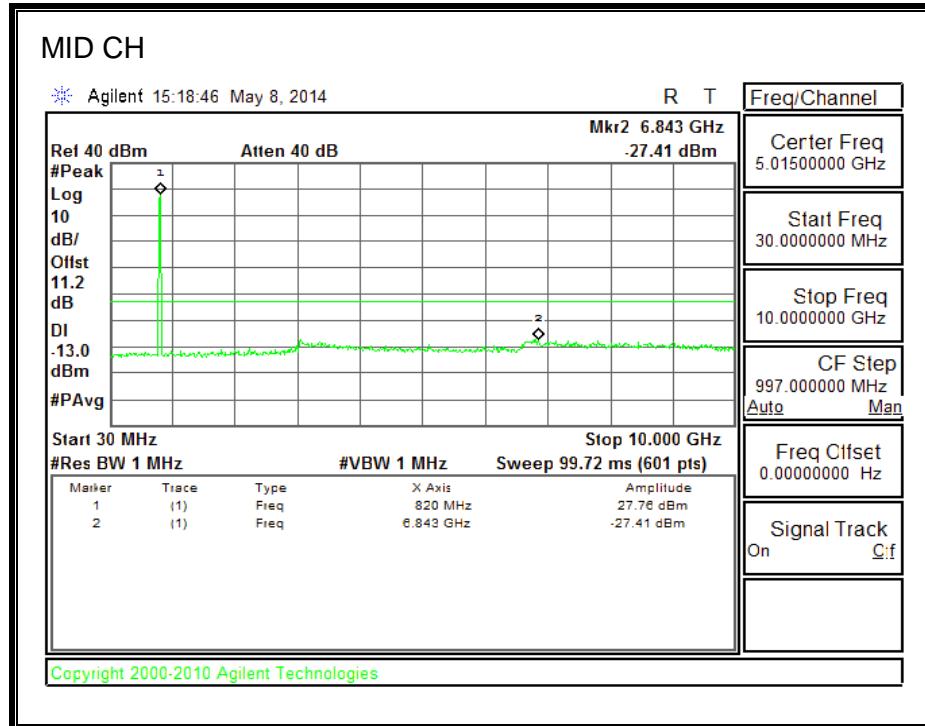

9. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54.& §90.213.

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 & §27.54 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§90.213 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations

TEST PROCEDURE

Use Agilent 8960 and CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)

Frequency Stability vs Temperature:

The EUT is place inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

RESULTS

See the following pages.

9.1. GSM

GRPS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low (MHz)	F high (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0197	848.9859		0.000
Extreme (50C)		824.0198	848.9859	25.6	0.031
Extreme (40C)		824.0198	848.9859	26.8	0.032
Extreme (30C)		824.0198	848.9859	27.3	0.033
Extreme (10C)		824.0198	848.9859	30.2	0.036
Extreme (0C)		824.0198	848.9859	32.6	0.039
Extreme (-10C)		824.0198	848.9859	30.9	0.037
Extreme (-20C)		824.0198	848.9859	29.4	0.035
Extreme (-30C)		824.0198	848.9859	26.2	0.031
25C	10%	824.0198	848.9859	29.1	0.035
	-10%	824.0198	848.9859	28.2	0.034
	End Point	824.0198	848.9859	28.6	0.034

EGRPS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low (MHz)	F high (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0196	848.9739		0.000
Extreme (50C)		824.0197	848.9739	26.7	0.032
Extreme (40C)		824.0197	848.9739	25.2	0.030
Extreme (30C)		824.0197	848.9739	24.5	0.029
Extreme (10C)		824.0197	848.9739	26.1	0.031
Extreme (0C)		824.0197	848.9739	29.3	0.035
Extreme (-10C)		824.0197	848.9739	32.7	0.039
Extreme (-20C)		824.0197	848.9739	30.2	0.036
Extreme (-30C)		824.0197	848.9739	25.8	0.031
25C	10%	824.0197	848.9739	30.4	0.036
	-10%	824.0197	848.9739	29.3	0.035
	End Point	824.0197	848.9739	29.6	0.035

GRPS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low (MHz)	F high (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0168	1909.9816		0.000
Extreme (50C)		1850.0168	1909.9817	54.8	0.029
Extreme (40C)		1850.0168	1909.9817	66.6	0.035
Extreme (30C)		1850.0168	1909.9817	64.8	0.034
Extreme (10C)		1850.0168	1909.9817	70.0	0.037
Extreme (0C)		1850.0168	1909.9817	69.3	0.037
Extreme (-10C)		1850.0168	1909.9817	73.6	0.039
Extreme (-20C)		1850.0168	1909.9817	74.2	0.039
Extreme (-30C)		1850.0168	1909.9817	72.0	0.038
25C		10%	1850.0168	1909.9817	51.3
		-10%	1850.0168	1909.9817	53.6
		End Point	1850.0168	1909.9817	53.2

EGRPS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low (MHz)	F high (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0678	1909.9772		0.000
Extreme (50C)		1850.0678	1909.9772	61.7	0.033
Extreme (40C)		1850.0679	1909.9772	63.2	0.034
Extreme (30C)		1850.0679	1909.9772	62.1	0.033
Extreme (10C)		1850.0679	1909.9773	72.3	0.038
Extreme (0C)		1850.0679	1909.9773	74.4	0.040
Extreme (-10C)		1850.0679	1909.9773	73.8	0.039
Extreme (-20C)		1850.0679	1909.9772	71.5	0.038
Extreme (-30C)		1850.0679	1909.9772	66.3	0.035
25C		10%	1850.0679	1909.9772	65.3
		-10%	1850.0679	1909.9772	68.7
		End Point	1850.0679	1909.9772	67.4

9.2. WCDMA

WCDMA REL99 BAND 2

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition	Voltage	F low (MHz)	F high (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.1048	1909.9864		0.000
Extreme (50C)		1850.1048	1909.9864	4.8	0.003
Extreme (40C)		1850.1048	1909.9864	6.8	0.004
Extreme (30C)		1850.1048	1909.9864	4.5	0.002
Extreme (10C)		1850.1048	1909.9864	7.2	0.004
Extreme (0C)		1850.1048	1909.9864	7.7	0.004
Extreme (-10C)		1850.1048	1909.9864	6.6	0.004
Extreme (-20C)		1850.1048	1909.9864	4.7	0.003
Extreme (-30C)		1850.1048	1909.9864	3.9	0.002
25C	10%	1850.1048	1909.9864	4.7	0.003
	-10%	1850.1048	1909.9864	7.4	0.004
	End Point	1850.1048	1909.9864	6.8	0.004

WCDMA REL99 BAND 4

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition	Voltage	F low (MHz)	F high (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1710.0295	1754.9759		0.000
Extreme (50C)		1710.0295	1754.9759	-7.2	-0.004
Extreme (40C)		1710.0295	1754.9759	5.7	0.003
Extreme (30C)		1710.0295	1754.9759	5.7	0.003
Extreme (10C)		1710.0295	1754.9759	3.8	0.002
Extreme (0C)		1710.0295	1754.9759	4.5	0.003
Extreme (-10C)		1710.0295	1754.9759	3.6	0.002
Extreme (-20C)		1710.0295	1754.9759	4.7	0.003
Extreme (-30C)		1710.0295	1754.9759	3.5	0.002
25C	10%	1710.0295	1754.9759	5.2	0.003
	-10%	1710.0295	1754.9759	5.0	0.003
	End Point	1710.0295	1754.9759	4.9	0.003

WCDMA REL99 BAND 5

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low (MHz)	F high (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0918	848.8895		0.000
Extreme (50C)		824.0918	848.8895	2.2	0.003
Extreme (40C)		824.0918	848.8895	-1.3	-0.002
Extreme (30C)		824.0918	848.8895	-2.4	-0.003
Extreme (10C)		824.0918	848.8895	-4.5	-0.005
Extreme (0C)		824.0918	848.8895	-2.3	-0.003
Extreme (-10C)		824.0918	848.8895	-2.2	-0.003
Extreme (-20C)		824.0918	848.8895	-1.4	-0.002
Extreme (-30C)		824.0918	848.8895	-2.0	-0.002
25C	10%	824.0918	848.8895	-8.8	-0.011
	-10%	824.0918	848.8895	-1.7	-0.002
	End Point	824.0918	848.8895	-2.6	-0.003

9.3. CDMA2000

CDMA200 1xRTT BC0

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low (MHz)	F high (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0052	848.9970		0.000
Extreme (50C)		824.0052	848.9970	-5.5	-0.007
Extreme (40C)		824.0052	848.9970	-5.6	-0.007
Extreme (30C)		824.0052	848.9970	5.7	0.007
Extreme (10C)		824.0052	848.9970	3.2	0.004
Extreme (0C)		824.0052	848.9970	9.2	0.011
Extreme (-10C)		824.0052	848.9970	-9.7	-0.012
Extreme (-20C)		824.0052	848.9970	3.7	0.004
Extreme (-30C)		824.0052	848.9970	4.5	0.005
25C	10%	824.0052	848.9970	-4.5	-0.005
	-10%	824.0052	848.9970	-4.3	-0.005
	End Point	824.0052	848.9970	-4.1	-0.005

CDMA2000 1xRTT BC1

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low (MHz)	F high (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.5405	1909.4554		0.000
Extreme (50C)		1850.5405	1909.4555	13.0	0.007
Extreme (40C)		1850.5405	1909.4555	12.1	0.006
Extreme (30C)		1850.5405	1909.4555	9.8	0.005
Extreme (10C)		1850.5405	1909.4555	10.7	0.006
Extreme (0C)		1850.5405	1909.4555	10.5	0.006
Extreme (-10C)		1850.5405	1909.4555	12.1	0.006
Extreme (-20C)		1850.5405	1909.4555	7.9	0.004
Extreme (-30C)		1850.5405	1909.4555	10.3	0.005
25C	10%	1850.5405	1909.4555	7.0	0.004
	-10%	1850.5405	1909.4555	10.2	0.005
	End Point	1850.5405	1909.4555	9.5	0.005

CDMA2000 1xRTT BC10

Limit		816.35	823.65	Delta	Frequency Stability
Condition		F low	F high		
Temperature	Voltage	(MHz)	(MHz)	(Hz)	(ppm)
Normal (25C)	Normal	816.5516	823.4480		0.000
Extreme (50C)		816.5516	823.4480	-5.6	-0.007
Extreme (40C)		816.5516	823.4480	-8.7	-0.011
Extreme (30C)		816.5516	823.4480	-4.6	-0.006
Extreme (10C)		816.5516	823.4480	-4.1	-0.005
Extreme (0C)		816.5516	823.4480	-5.7	-0.007
Extreme (-10C)		816.5516	823.4480	-10.3	-0.013
Extreme (-20C)		816.5516	823.4480	-8.8	-0.011
Extreme (-30C)		816.5516	823.4480	-2.5	-0.003
25C	10%	816.5516	823.4480	-3.7	-0.005
	-10%	816.5516	823.4480	6.7	0.008
	End Point	816.5516	823.4480	4.8	0.006

CDMA2000 1xRTT BC15

Limit		1710	1755	Delta	Frequency Stability
Condition		F low	F high		
Temperature	Voltage	(MHz)	(MHz)	(Hz)	(ppm)
Normal (25C)	Normal	1710.5509	1754.4514		0.000
Extreme (50C)		1710.5509	1754.4514	-7.5	-0.004
Extreme (40C)		1710.5509	1754.4514	-10.3	-0.006
Extreme (30C)		1710.5509	1754.4514	7.8	0.004
Extreme (10C)		1710.5509	1754.4514	5.5	0.003
Extreme (0C)		1710.5509	1754.4514	7.6	0.004
Extreme (-10C)		1710.5509	1754.4514	11.3	0.006
Extreme (-20C)		1710.5509	1754.4514	7.0	0.004
Extreme (-30C)		1710.5509	1754.4514	7.3	0.004
25C	10%	1710.5509	1754.4514	6.7	0.004
	-10%	1710.5509	1754.4514	6.2	0.004
	End Point	1710.5509	1754.4514	5.9	0.003

10. RADIATED TEST RESULTS

10.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50 and §90.635.

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

§27.50(d) (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to 1 watt EIRP. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in this band must employ a means for limiting power to the minimum necessary for successful communications

§ 90.635 Limitations on power and antenna height.

(a) The effective radiated power and antenna height for base stations may not exceed 1 kilowatt (30 dBw) and 304 m. (1,000 ft.) above average terrain (AAT), respectively, or the equivalent thereof as determined from the Table. These are maximum values, and applicants will be required to justify power levels and antenna heights requested.

(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

Table—Equivalent Power and Antenna Heights for Base Stations in the 851–869 MHz and 935–940 MHz Bands Which Have a Requirement for a 32 km (20 mi) Service Area Radius

Antenna height (ATT) meters (feet)	Effective radiated power (watts) ^{1,2,4}
Above 1,372 (4,500)	65
Above 1,220 (4,000) to 1,372 (4,500)	70
Above 1,067 (3,500) to 1,220 (4,000)	75
Above 915 (3,000) to 1,067 (3,500)	100
Above 763 (2,500) to 915 (3,000)	140
Above 610 (2,000) to 763 (2,500)	200
Above 458 (1,500) to 610 (2,000)	350
Above 305 (1,000) to 458 (1,500)	600
Up to 305 (1,000)	31,000

1Power is given in terms of effective radiated power (ERP).

2Applicants in the Los Angeles, CA, area who demonstrate a need to serve both the downtown and fringe areas will be permitted to utilize an ERP of 1 kw at the following mountaintop sites: Santiago Park, Sierra Peak, Mount Lukens, and Mount Wilson.

3Stations with antennas below 305 m (1,000 ft) (AAT) will be restricted to a maximum power of 1 kw (ERP).

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

KDB 971168 v02r01 RF Power output using broadband peak and average power meter method

MODES TESTED

- GPRS and EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, 1xRTT and EVDO, Rev A, BC0, BC1, BC10, BC15

RESULTS

10.1.1. LAT

Part 22 850MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	29.60	912.01
		190	836.6	29.81	957.19
		251	848.8	30.18	1042.32
	EGPRS	128	824.2	25.43	349.14
		190	836.6	26.35	431.52
		251	848.8	26.33	429.54

Part 24 1900MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	GPRS	512	1850.2	32.26	1682.67
		661	1880.0	31.70	1479.11
		810	1909.8	32.33	1710.02
	EGPRS	512	1850.2	30.57	1140.25
		661	1880.0	29.94	986.28
		810	1909.8	30.11	1025.65

Part 22 850MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4357	826.4	22.33	171.00
		4405	836.0	22.48	177.01
		4455	846.0	22.21	166.34
	UMTS, HSDPA	4357	826.4	21.43	139.00
		4405	836.0	21.58	143.88
		4455	846.0	21.31	135.21

Part 24 1900MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	27.06	508.16
		9800	1880.0	27.04	505.82
		9938	1907.6	27.38	547.02
	UMTS, HSDPA	9662	1852.4	25.64	366.44
		9800	1880.0	26.24	420.73
		9938	1907.6	26.58	454.99

Part 27 1700MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	1537	1712.4	26.04	401.79
		1638	1732.6	25.12	325.09
		1738	1752.5	26.08	405.51
	UMTS, HSDPA	1537	1712.4	25.30	338.84
		1638	1732.6	25.43	349.14
		1738	1752.5	25.40	346.74

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	20.78	119.67
		384	836.5	21.05	127.35
		777	848.3	22.10	162.18
	BC 0, EVDO Rev A	1013	824.7	20.85	121.62
		384	836.5	22.09	161.81
		777	848.3	21.25	133.35

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	26.43	439.54
		600	1880.0	27.51	563.64
		1175	1908.8	26.76	474.24
	BC1, EVDO REV A	25	1851.3	27.71	590.20
		600	1880.0	27.85	609.54
		1175	1908.8	27.20	524.81

Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC15, 1xRTT	25	1711.3	26.04	401.79
		450	1732.5	25.08	322.11
		875	1753.8	25.83	382.82
	BC15, EVDO, REV A	25	1711.3	25.27	336.51
		450	1732.5	26.18	414.95
		875	1753.8	25.85	384.59

Part 90 800MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	450	817.9	22.35	171.79
		560	819.2	22.25	167.88
		670	823.1	22.68	185.35
	BC10, EVDO A	450	817.9	22.37	172.58
		560	819.2	22.33	171.00
		670	823.1	22.46	176.20

CDMA2000 REV B				
Mode	Channel	f (MHz)	ERP	
			dBm	mW
EVDO Rev B Two Carriers Min.	1013+31	825.3	18.80	75.86
	384+425	837.2	19.14	82.04
	736+777	847.6	19.43	87.70
EVDO Rev B Two Carriers Max	1013+156	826.5	18.91	77.80
	384+550	838.8	18.94	78.34
	611+777	844.9	19.26	84.33
EVDO Rev B Three Carriers Min.	1013+31+72	825.9	18.83	76.38
	384+425+466	837.7	18.66	73.45
	695+736+777	846.7	19.20	83.18

10.1.2. UAT

Part 22 850MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	27.51	563.64
		190	836.6	27.12	515.23
		251	848.8	25.73	374.11
	EGPRS	128	824.2	23.23	210.38
		190	836.6	23.21	209.41
		251	848.8	22.71	186.64

Part 24 1900MHz Band					
Band	Mode	Channel	f (MHz)	EIRP	
				dBm	mW
PCS	GPRS	512	1850.2	27.96	625.17
		661	1880.0	27.56	570.16
		810	1909.8	28.10	645.65
	EGPRS	512	1850.2	25.40	346.74
		661	1880.0	25.00	316.23
		810	1909.8	25.04	319.15

Part 22 850MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4357	826.4	17.26	53.21
		4405	836.0	17.14	51.76
		4455	846.0	17.95	62.37
	UMTS, HSDPA	4357	826.4	16.35	43.15
		4405	836.0	16.23	41.98
		4455	846.0	17.04	50.58

Part 24 1900MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	21.04	127.06
		9800	1880.0	21.54	142.56
		9938	1907.6	21.76	149.97
	UMTS, HSDPA	9662	1852.4	20.14	103.28
		9800	1880.0	20.64	115.88
		9938	1907.6	20.86	121.90

Part 27 1700MHz Band					
Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	1537	1712.4	20.09	102.09
		1638	1732.6	18.30	67.61
		1738	1752.5	19.07	80.72
	UMTS, HSDPA	1537	1712.4	19.12	81.66
		1638	1732.6	18.49	70.63
		1738	1752.5	18.44	69.82

Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	20.59	114.55
		384	836.5	21.15	130.32
		777	848.3	20.89	122.74
	BC 0, EVDO Rev A	1013	824.7	20.22	105.20
		384	836.5	20.09	102.09
		777	848.3	20.10	102.33

Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	20.71	117.76
		600	1880.0	20.99	125.60
		1175	1908.8	22.01	158.85
	BC1, EVDO REV A	25	1851.3	21.28	134.28
		600	1880.0	20.92	123.59
		1175	1908.8	22.02	159.22

Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC15, 1xRTT	25	1711.3	20.68	116.95
		450	1732.5	19.98	99.54
		875	1753.8	19.77	94.84
	BC15, EVDO, REV A	25	1711.3	20.78	119.67
		450	1732.5	20.07	101.62
		875	1753.8	19.28	84.72

Part 90 800MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	450	817.9	19.99	99.77
		560	819.2	20.07	101.62
		670	823.1	20.35	108.39
	BC10, EVDO A	450	817.9	19.58	90.78
		560	819.2	19.81	95.72
		670	823.1	19.78	95.06

CDMA2000 REV B

Mode	Channel	f (MHz)	EIRP (Average)	
			dBm	mW
EVDO Rev B Two Carriers Min.	1013+31	825.3	15.96	39.45
	384+425	837.2	16.09	40.64
	736+777	847.6	16.50	44.67
EVDO Rev B Two Carriers Max	1013+156	826.5	15.78	37.84
	384+550	838.8	15.91	38.99
	611+777	844.9	16.15	41.21
EVDO Rev B Three Carriers Min.	1013+31+72	825.9	16.04	40.18
	384+425+466	837.7	15.87	38.64
	695+736+777	846.7	16.10	40.74

10.1.3. LAT

GPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber D																				
Company:	Apple																			
Project #:	14U17673																			
Date:	06/19/14																			
Test Engineer:	M. Hua																			
Configuration:	EUT Only																			
Mode:	GSM 850MHz																			
<u>Test Equipment:</u>																				
Receiving: Sunol T407, and Chamber D Cable																				
Substitution: Dipole S/N: 00022117, 8ft SMA Cable																				
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes										
Low Ch																				
824.20	22.56	V	0.6	0.0	21.94	24.09	38.45	40.60	-16.5											
824.20	28.07	H	0.6	0.0	27.45	29.60	38.45	40.60	-11.0											
Mid Ch																				
836.60	22.28	V	0.6	0.0	21.66	23.81	38.45	40.60	-16.8											
836.60	28.28	H	0.6	0.0	27.66	29.81	38.45	40.60	-10.8											
High Ch																				
848.80	21.26	V	0.6	0.0	20.64	22.79	38.45	40.60	-17.8											
848.80	28.65	H	0.6	0.0	28.03	30.18	38.45	40.60	-10.4											
Rev. 01.01.14																				

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: M. Hua
Configuration: EUT Only
Mode: EDGE 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable

Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	18.85	V	0.6	0.0	18.23	20.38	38.45	40.60	-20.2	
824.20	23.90	H	0.6	0.0	23.28	25.43	38.45	40.60	-15.2	
Mid Ch										
836.60	19.04	V	0.6	0.0	18.42	20.57	38.45	40.60	-20.0	
836.60	24.82	H	0.6	0.0	24.20	26.35	38.45	40.60	-14.2	
High Ch										
848.80	17.74	V	0.6	0.0	17.12	19.27	38.45	40.60	-21.3	
848.80	24.80	H	0.6	0.0	24.18	26.33	38.45	40.60	-14.3	

Rev. 10.24.13

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: M. Hua
Configuration: EUT Only
Mode: GPRS 1900MHz

Test Equipment:**Receiving:** Horn T344 and Chamber D SMA Cables**Substitution:** Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	17.1	V	0.98	7.88	24.01	33.0	-9.0	
1.851	25.4	H	0.98	7.88	32.26	33.0	-0.7	
Mid Ch								
1.880	16.5	V	0.98	7.86	23.39	33.0	-9.6	
1.880	24.8	H	0.98	7.86	31.70	33.0	-1.3	
High Ch								
1.910	15.7	V	0.98	7.84	22.55	33.0	-10.5	
1.910	25.5	H	0.98	7.84	32.33	33.0	-0.7	

Rev. 10.24.13

High Frequency Substitution Measurement UL Fremont Radiated Chamber D																
Company:	Apple															
Project #:	14U17673															
Date:	06/19/14															
Test Engineer:	M. Hua															
Configuration:	EUT Only															
Mode:	EDGE 1900MHz															
Test Equipment:																
Receiving: Horn T344 and Chamber D SMA Cables																
Substitution: Horn T69 Substitution, and 8ft SMA Cable																
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes								
Low Ch																
1.851	15.5	V	0.98	7.88	22.35	33.0	-10.7									
1.851	23.7	H	0.98	7.88	30.57	33.0	-2.4									
Mid Ch																
1.880	14.3	V	0.98	7.86	21.16	33.0	-11.8									
1.880	23.1	H	0.98	7.86	29.94	33.0	-3.1									
High Ch																
1.910	13.6	V	0.98	7.84	20.50	33.0	-12.5									
1.910	23.3	H	0.98	7.84	30.11	33.0	-2.9									

Rev. 10.24.13

UMTS REL 99, 850MHz BAND 5

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 07/24/14
Test Engineer: M. Hua
Configuration: EUT Only
Mode: WCDMA Rel 99 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable

Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	14.47	V	0.6	0.0	13.85	16.00	38.45	40.60	-24.6	
826.40	20.80	H	0.6	0.0	20.18	22.33	38.45	40.60	-18.3	
Mid Ch										
836.00	14.80	V	0.6	0.0	14.18	16.33	38.45	40.60	-24.3	
836.00	20.95	H	0.6	0.0	20.33	22.48	38.45	40.60	-18.1	
High Ch										
846.00	14.26	V	0.6	0.0	13.64	15.79	38.45	40.60	-24.8	
846.00	20.68	H	0.6	0.0	20.06	22.21	38.45	40.60	-18.4	

Rev. 10.24.13

HSDPA, 850MHz BAND 5

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 07/24/14
Test Engineer: M. Hua
Configuration: EUT Only
Mode: WCDMA HSDPA 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	13.57	V	0.6	0.0	12.95	15.10	38.45	40.60	-25.5	
826.40	19.90	H	0.6	0.0	19.28	21.43	38.45	40.60	-19.2	
Mid Ch										
836.00	13.90	V	0.6	0.0	13.28	15.43	38.45	40.60	-25.2	
836.00	20.05	H	0.6	0.0	19.43	21.58	38.45	40.60	-19.0	
High Ch										
846.00	13.36	V	0.6	0.0	12.74	14.89	38.45	40.60	-25.7	
846.00	19.78	H	0.6	0.0	19.16	21.31	38.45	40.60	-19.3	

Rev. 10.24.13

UMTS REL 99, 1900MHz BAND 2

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: M. Hua
Configuration: EUT Only
Mode: WCDMA Rel 99 1900MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables
Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	19.5	V	0.98	7.88	26.37	33.0	-6.6	
1.852	20.2	H	0.98	7.88	27.06	33.0	-5.9	
Mid Ch								
1.880	18.3	V	0.98	7.86	25.13	33.0	-7.9	
1.880	20.2	H	0.98	7.86	27.04	33.0	-6.0	
High Ch								
1.908	20.3	V	0.98	7.84	27.18	33.0	-5.8	
1.908	20.5	H	0.98	7.84	27.38	33.0	-5.6	

Rev. 10.24.13

HSDPA, 1900MHz BAND 2

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: M. Hua
Configuration: EUT Only
Mode: WCDMA HSDPA 1900MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables
Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.852	10.4	V	0.98	7.88	17.34	33.0	-15.7	
1.852	18.7	H	0.98	7.88	25.64	33.0	-7.4	
Mid Ch								
1.880	10.2	V	0.98	7.86	17.03	33.0	-16.0	
1.880	19.4	H	0.98	7.86	26.24	33.0	-6.8	
High Ch								
1.908	10.2	V	0.98	7.84	17.07	33.0	-15.9	
1.908	19.7	H	0.98	7.84	26.58	33.0	-6.4	

Rev. 10.24.13

UMTS REL 99, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber D																
Company:	Apple															
Project #:	14U17673															
Date:	06/19/14															
Test Engineer:	M. Hua															
Configuration:	EUT Only															
Mode:	WCDMA Rel 99 1700MHz															
Test Equipment:																
Receiving: Horn T344 and Chamber D SMA Cables																
Substitution: Horn T69 Substitution, and 8ft SMA Cable																
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes								
Low Ch																
1.712	13.6	V	0.95	8.25	20.87	30.0	-9.1									
1.712	18.7	H	0.95	8.25	26.04	30.0	-4.0									
Mid Ch																
1.733	13.3	V	0.95	8.17	20.54	30.0	-9.5									
1.733	17.9	H	0.95	8.17	25.12	30.0	-4.9									
High Ch																
1.753	12.2	V	0.95	8.09	19.32	30.0	-10.7									
1.753	18.9	H	0.95	8.09	26.08	30.0	-3.9									
Rev. 10.24.13																

HSDPA, 1700MHz BAND 4

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: M. Hua
Configuration: EUT Only
Mode: WCDMA HSDPA 1700MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables

Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.712	9.4	V	0.95	8.25	16.72	30.0	-13.3	
1.712	18.0	H	0.95	8.25	25.30	30.0	-4.7	
Mid Ch								
1.733	11.6	V	0.95	8.17	18.82	30.0	-11.2	
1.733	18.2	H	0.95	8.17	25.43	30.0	-4.6	
High Ch								
1.753	9.5	V	0.95	8.09	16.61	30.0	-13.4	
1.753	18.3	H	0.95	8.09	25.40	30.0	-4.6	

Rev. 10.24.13

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: T. Chu
Configuration: EUT only
Mode: CDMA 1XRTT 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable

Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	12.87	V	0.6	0.0	12.25	14.40	38.45	40.60	-26.2	
824.70	19.25	H	0.6	0.0	18.63	20.78	38.45	40.60	-19.8	
Mid Ch										
836.52	13.24	V	0.6	0.0	12.62	14.77	38.45	40.60	-25.8	
836.52	19.52	H	0.6	0.0	18.90	21.05	38.45	40.60	-19.5	
High Ch										
848.31	13.32	V	0.6	0.0	12.70	14.85	38.45	40.60	-25.8	
848.31	20.57	H	0.6	0.0	19.95	22.10	38.45	40.60	-18.5	

Rev. 10.24.13

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 07/01/14
Test Engineer: M. Hua
Configuration: EUT Only
Mode: CDMA Rev A 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	13.37	V	0.6	0.0	12.75	14.90	38.45	40.60	-25.7	
824.70	19.32	H	0.6	0.0	18.70	20.85	38.45	40.60	-19.7	
Mid Ch										
836.52	14.23	V	0.6	0.0	13.61	15.76	38.45	40.60	-24.8	
836.52	20.56	H	0.6	0.0	19.94	22.09	38.45	40.60	-18.5	
High Ch										
848.31	13.03	V	0.6	0.0	12.41	14.56	38.45	40.60	-26.0	
848.31	19.72	H	0.6	0.0	19.10	21.25	38.45	40.60	-19.3	

Rev. 06.18.14

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: T. Chu
Configuration: EUT Only
Mode: CDMA 1XRTT 1900MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables
Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	18.6	V	0.98	7.88	25.49	33.0	-7.5	
1.851	19.5	H	0.98	7.88	26.43	33.0	-6.6	
Mid Ch								
1.880	17.9	V	0.98	7.86	24.75	33.0	-8.3	
1.880	20.6	H	0.98	7.86	27.51	33.0	-5.5	
High Ch								
1.909	18.8	V	0.98	7.84	25.63	33.0	-7.4	
1.909	19.9	H	0.98	7.84	26.76	33.0	-6.2	

Rev. 10.24.13

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: T. Chu
Configuration: EUT Only
Mode: CDMA Rev A 1900MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables
Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	5.4	V	0.98	7.88	12.33	33.0	-20.7	
1.851	20.8	H	0.98	7.88	27.71	33.0	-5.3	
Mid Ch								
1.880	4.2	V	0.98	7.86	11.07	33.0	-21.9	
1.880	21.0	H	0.98	7.86	27.85	33.0	-5.2	
High Ch								
1.909	-0.9	V	0.98	7.84	5.92	33.0	-27.1	
1.909	20.3	H	0.98	7.84	27.20	33.0	-5.8	

Rev. 10.24.13

High Frequency Substitution Measurement UL Fremont Radiated Chamber D																
Company:	Apple															
Project #:	14U17673															
Date:	06/19/14															
Test Engineer:	T. Chu															
Configuration:	EUT Only															
Mode:	CDMA 1XRTT 1700MHz															
Test Equipment:																
Receiving: Horn T344 and Chamber D SMA Cables																
Substitution: Horn T59 Substitution, and 8ft SMA Cable																
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes								
Low Ch																
1.711	16.0	V	0.95	8.25	23.28	30.0	-6.7									
1.711	18.7	H	0.95	8.25	26.04	30.0	-4.0									
Mid Ch																
1.733	16.2	V	0.95	8.17	23.39	30.0	-6.6									
1.733	17.9	H	0.95	8.17	25.08	30.0	-4.9									
High Ch																
1.754	16.9	V	0.95	8.09	24.03	30.0	-6.0									
1.754	18.7	H	0.95	8.09	25.83	30.0	-4.2									
Rev. 10.24.13																

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: T. Chu
Configuration: EUT Only
Mode: CDMA Rev A 1700MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables

Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	9.1	V	0.95	8.25	16.45	30.0	-13.6	
1.711	18.0	H	0.95	8.25	25.27	30.0	-4.7	
Mid Ch								
1.733	10.0	V	0.95	8.17	17.25	30.0	-12.8	
1.733	19.0	H	0.95	8.17	26.18	30.0	-3.8	
High Ch								
1.754	10.2	V	0.95	8.09	17.35	30.0	-12.7	
1.754	18.7	H	0.95	8.09	25.85	30.0	-4.2	

Rev. 10.24.13

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: T. Chu
Configuration: EUT Only
Mode: CDMA 1XRTT 800MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
817.25	15.39	V	0.6	0.0	14.77	16.92	38.45	40.60	-23.7	
817.25	20.82	H	0.6	0.0	20.20	22.35	38.45	40.60	-18.3	
Mid Ch										
820.00	14.83	V	0.6	0.0	14.21	16.36	38.45	40.60	-24.2	
820.00	20.72	H	0.6	0.0	20.10	22.25	38.45	40.60	-18.4	
High Ch										
822.75	15.71	V	0.6	0.0	15.09	17.24	38.45	40.60	-23.4	
822.75	21.15	H	0.6	0.0	20.53	22.68	38.45	40.60	-17.9	

Rev. 10.24.13

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 07/01/14
Test Engineer: M. Hua
Configuration: EUT Only
Mode: CDMA Rev A 800MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
817.25	14.15	V	0.6	0.0	13.53	15.68	38.45	40.60	-24.9	
817.25	20.84	H	0.6	0.0	20.22	22.37	38.45	40.60	-18.2	
Mid Ch										
820.00	14.74	V	0.6	0.0	14.12	16.27	38.45	40.60	-24.3	
820.00	20.80	H	0.6	0.0	20.18	22.33	38.45	40.60	-18.3	
High Ch										
822.75	14.94	V	0.6	0.0	14.32	16.47	38.45	40.60	-24.1	
822.75	20.93	H	0.6	0.0	20.31	22.46	38.45	40.60	-18.1	

Rev. 06.18.14

Two Carriers Min Separation

High Frequency Substitution Measurement UL Fremont Radiated Chamber D										
Company: Project #: 14U17673 Date: 07/24/14 Test Engineer: Tony Wang Configuration: EUT only Mode: CDMA Rev B 2C Min Sep 850MHz										
Test Equipment: Receiving: Sunol T407, and Chamber D Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Limit (dBm)	Margin EIRP (dB)	Notes	
Low Ch										
824.7 + 825.93MHz	9.83	V	0.6	0.0	9.21	11.36	38.5	-27.1		
824.7 + 825.93MHz	17.27	H	0.6	0.0	16.65	18.80	38.5	-19.6		
Mid Ch										
836.52+837.75MHz	9.75	V	0.6	0.0	9.13	11.28	38.5	-27.2		
836.52+837.75MHz	17.61	H	0.6	0.0	16.99	19.14	38.5	-19.3		
High Ch										
847.08+848.31MHz	10.55	V	0.6	0.0	9.93	12.08	38.5	-26.4		
847.08+848.31MHz	17.90	H	0.6	0.0	17.28	19.43	38.5	-19.0		
Rev. 10.24.13										

Two Carriers Max Separation

High Frequency Substitution Measurement UL Fremont Radiated Chamber D									
Company: Project #: 14U17673 Date: 07/24/14 Test Engineer: R.Z Configuration: EUT only Mode: CDMA Rev B 2C Max Sep 850MHz									
Test Equipment: Receiving: Sunol T407, and Chamber D Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Limit (dBm)	Margin EIRP (dB)	Notes
Low Ch									
824.7 + 829.68MHz	9.64	V	0.6	0.0	9.02	11.17	38.5	-27.3	
824.7 + 829.68MHz	17.08	H	0.6	0.0	16.46	18.61	38.5	-19.8	
Mid Ch									
836.52+841.50MHz	9.56	V	0.6	0.0	8.94	11.09	38.5	-27.4	
836.52+841.50MHz	17.42	H	0.6	0.0	16.80	18.95	38.5	-19.5	
High Ch									
843.33+848.31MHz	10.36	V	0.6	0.0	9.74	11.89	38.5	-26.6	
843.33+848.31MHz	17.71	H	0.6	0.0	17.09	19.24	38.5	-19.2	
Rev. 10.24.13									

Three Carriers Min Separation

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company:
Project #: 14U17673
Date: 07/24/14
Test Engineer: R.Z
Configuration: EUT only
Mode: CDMA Rev B 3C Min Sep 850MHz

Test Equipment:

Receiving: Sunol T407, and Chamber D Cable
Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	Limit (dBm)	Margin EIRP (dB)	Notes
Low Ch									
824.7+825.93+827.16MHz	9.45	V	0.6	0.0	8.83	10.98	38.5	-27.5	
824.7+825.93+827.16MHz	17.30	H	0.6	0.0	16.68	18.83	38.5	-19.6	
Mid Ch									
836.52+837.75+838.98MHz	9.27	V	0.6	0.0	8.65	10.80	38.5	-27.6	
836.52+837.75+838.98MHz	17.13	H	0.6	0.0	16.51	18.66	38.5	-19.8	
High Ch									
845.85+847.08+848.31MHz	9.47	V	0.6	0.0	8.85	11.00	38.5	-27.4	
845.85+847.08+848.31MHz	17.67	H	0.6	0.0	17.05	19.20	38.5	-19.2	

Rev. 10.24.13

10.1.4. UAT

GPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber D																				
Company:	Apple																			
Project #:	14U17673																			
Date:	06/19/14																			
Test Engineer:	M. Hua																			
Configuration:	EUT Only																			
Mode:	GSM 850MHz																			
Test Equipment:																				
Receiving: Sunol T407, and Chamber D Cable																				
Substitution: Dipole S/N: 00022117, 8ft SMA Cable																				
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes										
Low Ch																				
824.20	19.40	V	0.6	0.0	18.78	20.93	38.45	40.60	-19.7											
824.20	25.98	H	0.6	0.0	25.36	27.51	38.45	40.60	-13.1											
Mid Ch																				
836.60	19.10	V	0.6	0.0	18.48	20.63	38.45	40.60	-20.0											
836.60	25.59	H	0.6	0.0	24.97	27.12	38.45	40.60	-13.5											
High Ch																				
848.80	16.89	V	0.6	0.0	16.27	18.42	38.45	40.60	-22.2											
848.80	24.20	H	0.6	0.0	23.58	25.73	38.45	40.60	-14.9											
Rev. 01.01.14																				

EGPRS 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber D																				
Company:	Apple																			
Project #:	14U17673																			
Date:	06/19/14																			
Test Engineer:	M. Hua																			
Configuration:	EUT Only																			
Mode:	EDGE 850MHz																			
<u>Test Equipment:</u>																				
Receiving: Sunol T407, and Chamber D Cable																				
Substitution: Dipole S/N: 00022117, 8ft SMA Cable																				
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes										
Low Ch																				
824.20	15.76	V	0.6	0.0	15.14	17.29	38.45	40.60	-23.3											
824.20	21.70	H	0.6	0.0	21.08	23.23	38.45	40.60	-17.4											
Mid Ch																				
836.60	15.26	V	0.6	0.0	14.64	16.79	38.45	40.60	-23.8											
836.60	21.68	H	0.6	0.0	21.06	23.21	38.45	40.60	-17.4											
High Ch																				
848.80	14.27	V	0.6	0.0	13.65	15.80	38.45	40.60	-24.8											
848.80	21.18	H	0.6	0.0	20.56	22.71	38.45	40.60	-17.9											
Rev. 10.24.13																				

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: M. Hua
Configuration: EUT Only
Mode: GPRS 1900MHz

Test Equipment:**Receiving:** Horn T344 and Chamber D SMA Cables**Substitution:** Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	18.2	V	0.98	7.88	25.06	33.0	-7.9	
1.851	21.1	H	0.98	7.88	27.96	33.0	-5.0	
Mid Ch								
1.880	17.0	V	0.98	7.86	23.92	33.0	-9.1	
1.880	20.7	H	0.98	7.86	27.56	33.0	-5.4	
High Ch								
1.910	18.5	V	0.98	7.84	25.33	33.0	-7.7	
1.910	21.2	H	0.98	7.84	28.10	33.0	-4.9	

Rev. 10.24.13

EGPRS 1900MHz BAND 2

High Frequency Substitution Measurement
UL Fremont Radiated Chamber D

Company: Apple
Project #: 14U17673
Date: 06/19/14
Test Engineer: M. Hua
Configuration: EUT Only
Mode: EDGE 1900MHz

Test Equipment:

Receiving: Horn T344 and Chamber D SMA Cables

Substitution: Horn T59 Substitution, and 8ft SMA Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	15.5	V	0.98	7.88	22.40	33.0	-10.6	
1.851	18.5	H	0.98	7.88	25.40	33.0	-7.6	
Mid Ch								
1.880	14.4	V	0.98	7.86	21.29	33.0	-11.7	
1.880	18.1	H	0.98	7.86	25.00	33.0	-8.0	
High Ch								
1.910	15.4	V	0.98	7.84	22.23	33.0	-10.8	
1.910	18.2	H	0.98	7.84	25.04	33.0	-8.0	

Rev. 10.24.13

UMTS REL 99, 850MHz BAND 5

High Frequency Substitution Measurement
UL Fremont Radiated Chamber E

Company: Apple
Project #: 14U17673
Date: 07/24/14
Test Engineer: T. Wang
Configuration: EUT Only
Mode: WCDMA Rel 99 850MHz

Test Equipment:

Receiving: Sunol T408, and Chamber E Cable

Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	8.61	V	0.6	0.0	7.99	10.14	38.45	40.60	-30.5	
826.40	15.73	H	0.6	0.0	15.11	17.26	38.45	40.60	-23.3	
Mid Ch										
836.00	7.58	V	0.6	0.0	6.96	9.11	38.45	40.60	-31.5	
836.00	15.61	H	0.6	0.0	14.99	17.14	38.45	40.60	-23.5	
High Ch										
846.00	8.18	V	0.6	0.0	7.56	9.71	38.45	40.60	-30.9	
846.00	16.42	H	0.6	0.0	15.80	17.95	38.45	40.60	-22.6	

Rev. 10.24.13

HSDPA, 850MHz BAND 5

High Frequency Substitution Measurement
UL Fremont Radiated Chamber E

Company: Apple
Project #: 14U17673
Date: 07/24/14
Test Engineer: T. Wang
Configuration: EUT Only
Mode: WCDMA HSDPA 850MHz

Test Equipment:

Receiving: Sunol T408, and Chamber E Cable

Substitution: Dipole S/N: 00022117, 8ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	7.70	V	0.6	0.0	7.08	9.23	38.45	40.60	-31.4	
826.40	14.82	H	0.6	0.0	14.20	16.35	38.45	40.60	-24.3	
Mid Ch										
836.00	6.67	V	0.6	0.0	6.05	8.20	38.45	40.60	-32.4	
836.00	14.70	H	0.6	0.0	14.08	16.23	38.45	40.60	-24.4	
High Ch										
846.00	7.27	V	0.6	0.0	6.65	8.80	38.45	40.60	-31.8	
846.00	15.51	H	0.6	0.0	14.89	17.04	38.45	40.60	-23.6	

Rev. 10.24.13

UMTS REL 99, 1900MHz BAND 2

High Frequency Substitution Measurement
UL Fremont Radiated Chamber E

Company: Apple
Project #: 14U17673
Date: 07/24/14
Test Engineer: T. Wang
Configuration: EUT Only
Mode: WCDMA Rel 99 1900MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables
Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	13.0	V	0.98	8.62	20.59	33.0	-12.4	
1.852	13.2	H	0.98	8.83	21.04	33.0	-12.0	
Mid Ch								
1.880	13.1	V	0.98	8.53	20.62	33.0	-12.4	
1.880	13.8	H	0.98	8.68	21.54	33.0	-11.5	
High Ch								
1.908	13.5	V	0.98	8.43	20.90	33.0	-12.1	
1.908	14.2	H	0.98	8.53	21.76	33.0	-11.2	

Rev. 10.24.13

HSDPA, 1900MHz BAND 2

High Frequency Substitution Measurement
UL Fremont Radiated Chamber E

Company: Apple
Project #: 14U17673
Date: 07/24/14
Test Engineer: T. Wang
Configuration: EUT Only
Mode: WCDMA HSDPA 1900MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables
Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	11.5	V	0.98	8.62	19.09	33.0	-13.9	
1.852	12.3	H	0.98	8.83	20.14	33.0	-12.9	
Mid Ch								
1.880	11.5	V	0.98	8.53	19.02	33.0	-14.0	
1.880	12.9	H	0.98	8.68	20.64	33.0	-12.4	
High Ch								
1.908	11.9	V	0.98	8.43	19.30	33.0	-13.7	
1.908	13.3	H	0.98	8.53	20.86	33.0	-12.1	

Rev. 10.24.13

UMTS REL 99, 1700MHz BAND 4

High Frequency Substitution Measurement
UL Fremont Radiated Chamber E

Company: Apple
 Project #: 14U17673
 Date: 06/17/14
 Test Engineer: T. Wang
 Configuration: EUT Only
 Mode: WCDMA Rel 99 1700MHz

Test Equipment:

Receiving: Horn T346 and Chamber E SMA Cables
 Substitution: Horn T60 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	8.2	V	0.95	8.40	15.67	30.0	-14.3	
1.712	12.5	H	0.95	8.57	20.09	30.0	-9.9	
Mid Ch								
1.733	8.2	V	0.95	8.50	15.78	30.0	-14.2	
1.733	10.6	H	0.95	8.70	18.30	30.0	-11.7	
High Ch								
1.753	8.0	V	0.95	8.59	15.59	30.0	-14.4	
1.753	11.2	H	0.95	8.82	19.07	30.0	-10.9	

Rev. 10.24.13