



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8
CERTIFICATION TEST REPORT**

FOR

CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL NUMBER: A1549

**FCC ID: BCG-E2816A
IC: 579C-E2816A**

REPORT NUMBER: 14U17673-E22, REVISION A

ISSUE DATE: JULY 29, 2014

Prepared for
**APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	07/17/2014	Initial Issue	C. Pang
A	07/29/2014	Revised Section 5.1, 5.4 and 8	O. Su

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY</i>	<i>6</i>
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>7</i>
5.3. <i>SOFTWARE AND FIRMWARE.....</i>	<i>7</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>7</i>
5.5. <i>MODIFICATIONS</i>	<i>7</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
6. TEST AND MEASUREMENT EQUIPMENT	10
7. OCCUPIED BANDWIDTH	11
8. RADIATED EMISSION TEST RESULTS.....	13
8.1. <i>LIMITS AND PROCEDURE</i>	<i>13</i>
8.1.1. <i>TYPE A FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz),.....</i>	<i>15</i>
8.1.2. <i>TYPE B FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz).....</i>	<i>21</i>
8.1.3. <i>TYPE A TX SPURIOUS EMISSION 30 TO 1000 MHz</i>	<i>27</i>
8.1.4. <i>TYPE B TX SPURIOUS EMISSION 30 TO 1000 MHz</i>	<i>30</i>
9. AC MAINS LINE CONDUCTED EMISSIONS.....	33
9.1. <i>LIMITS AND PROCEDURE</i>	<i>33</i>
9.2. <i>TYPE A, 424 KBPS.....</i>	<i>34</i>
9.2.1. <i>WITHOUT DUMMY LOAD</i>	<i>34</i>
9.2.2. <i>WITH DUMMY LOAD</i>	<i>37</i>
9.3. <i>TYPE B, 424 KBPS.....</i>	<i>40</i>
9.3.1. <i>WITHOUT DUMMY LOAD</i>	<i>40</i>
9.3.2. <i>WITH DUMMY LOAD</i>	<i>43</i>
10. FREQUENCY STABILITY.....	46
11. SETUP PHOTOS	48

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL: A1549

SERIAL NUMBER: C39MR003G32J; C39MR0AEG33G

DATE TESTED: MAY 30, 2014 – JULY 03, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Pass
INDUSTRY CANADA RSS-210 Issue 8, Annex 2	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
UL Verification Services Inc.

Tested By:



Oliver Su
Senior Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, and FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input checked="" type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F
	<input type="checkbox"/> Chamber G
	<input checked="" type="checkbox"/> Chamber H

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Model A1549 is a mobile phone with multimedia functions (music, application support, and video), Cellular GSM/GPRS/EGPRS/CDMA2000/EVDO Rev.A/ EVDO Rev.B /WCDMA/HSPA+/DC-HSDPA/LTE FDD & Carrier Aggregation radio, IEEE 802.11a/b/g/n/ac radio, Bluetooth radio and NFC. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak radiated output power as follows:

Frequency Range (MHz)	Mode	Output Power		Output Power
		(dBuV)	(dBm)	(mW)
14.43	Type A	4.55	-102.45	0.000000000057
14.39	Type B	10.19	-96.81	0.000000000208

5.3. SOFTWARE AND FIRMWARE

The test utility software used during testing was Star Links 1.9.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT with dummy load, set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait) and Y orientation was determined to be the worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z (Portrait) orientation.

Worst case of radiated emission test below 30MHz was found on antenna face-on orientation.

5.5. MODIFICATIONS

No modifications were made during testing.

5.6. DESCRIPTION OF TEST SETUP


SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC adapter	Apple	A1401	60812	NA
Earphone	Apple	NA	NA	NA

I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US115	Un-Shielded	80cm	NA
2	DC	1	USB	Un-Shielded	1m	NA
3	Audio	1	Jack	Un-Shielded	0.5m	NA

SETUP DIAGRAM FOR TESTS

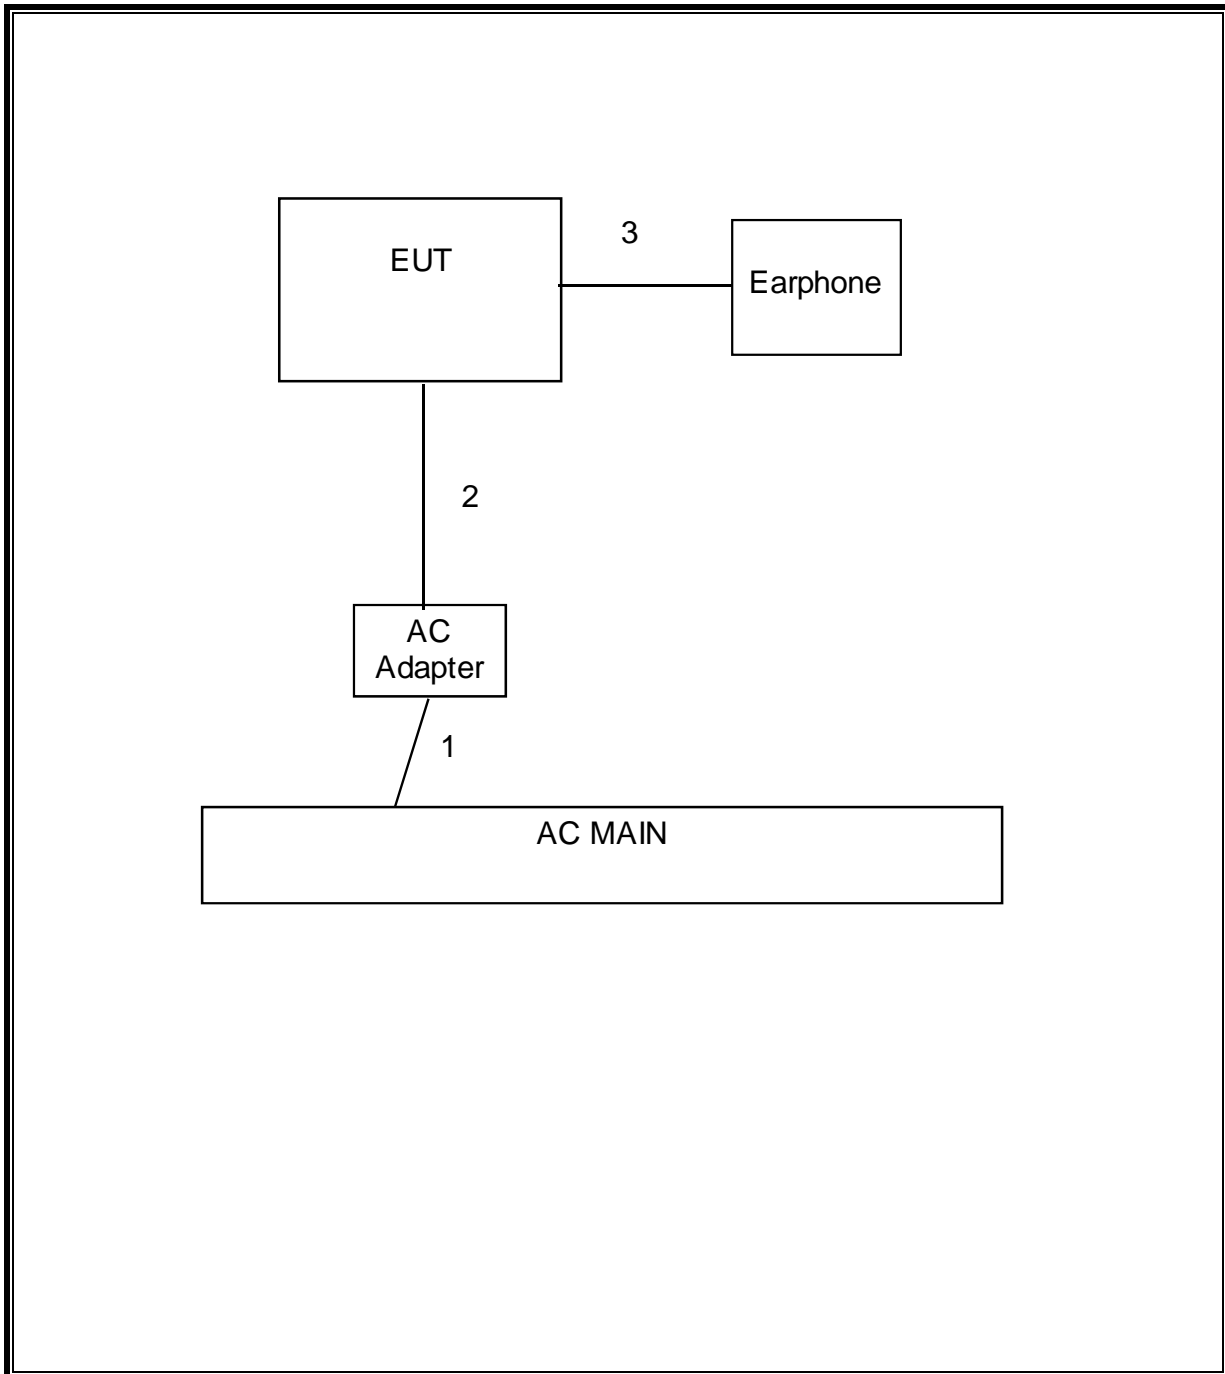

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	F00129	02/22/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	F00168	03/28/15
Preamplifier, 1300 MHz	Sonoma	310	F00008	05/27/15
Loop Antenna	ETS Lindgren	6502	F00370	10/04/14
Close-Field Probe	Agilent / HP	11941A	N02873	08/15/14
Temperature Chamber	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	F00363	10/11/14
EMI Test Receiver, 9 KHz-7 GHz	R & S	ESCI 7	F00092	09/05/14
LISN, 30 MHz	FCC	LISN-50/250-25-2	C00626	01/14/15

7. OCCUPIED BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS

Moduation	Frequency (MHz)	99% Bandwidth (MHz)
Type A	13.56	33.894
Type B	13.56	33.87

Type A

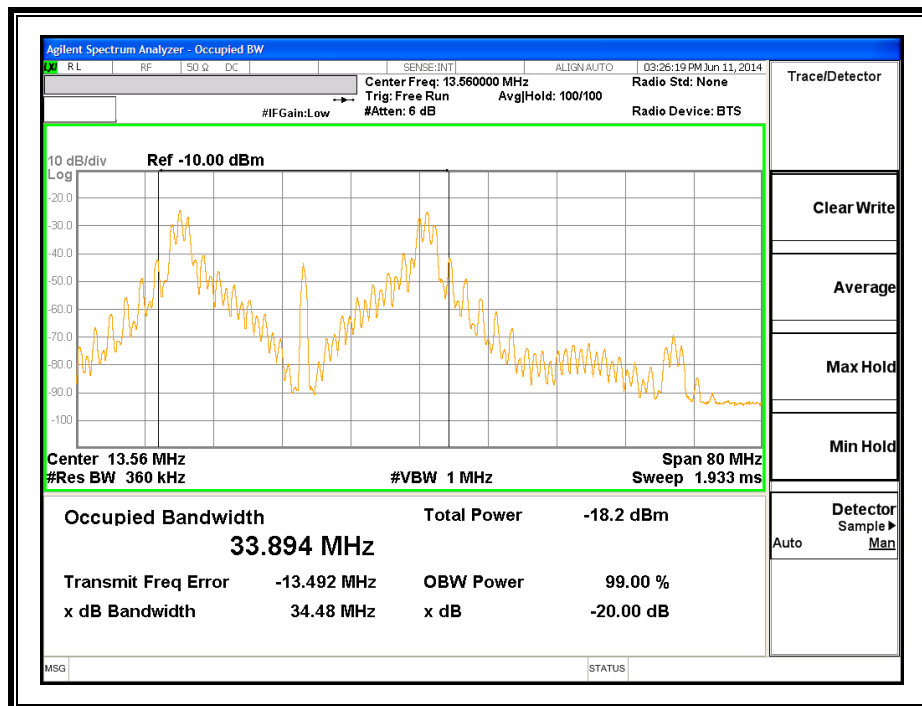

Type B

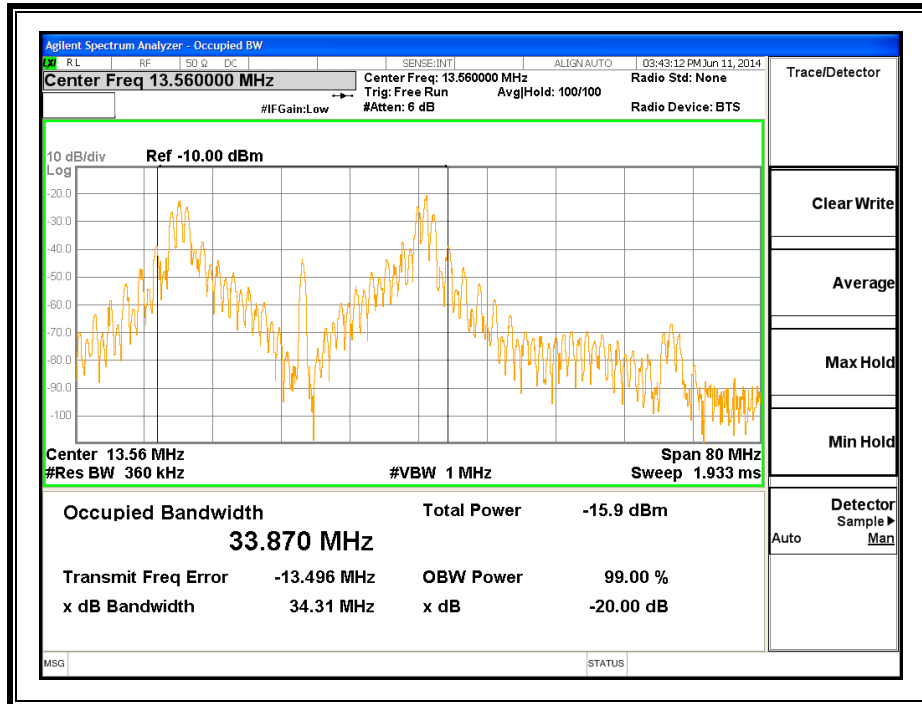

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225

IC RSS-210, Section 2.6 (Transmitter)

IC RSS-GEN, Section 6 (Receiver)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, however, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table is based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE

ANSI C63.4, 2009


The EUT is an intentional radiator that incorporates a digital device, the highest fundamental frequency generated or used in the device is 13.56 MHz; therefore, the frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater.


RESULTS


No non-compliance noted:

8.1.1. TYPE A FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz),

TYPE A, 424 Kbps, ANTENNA FACE ON

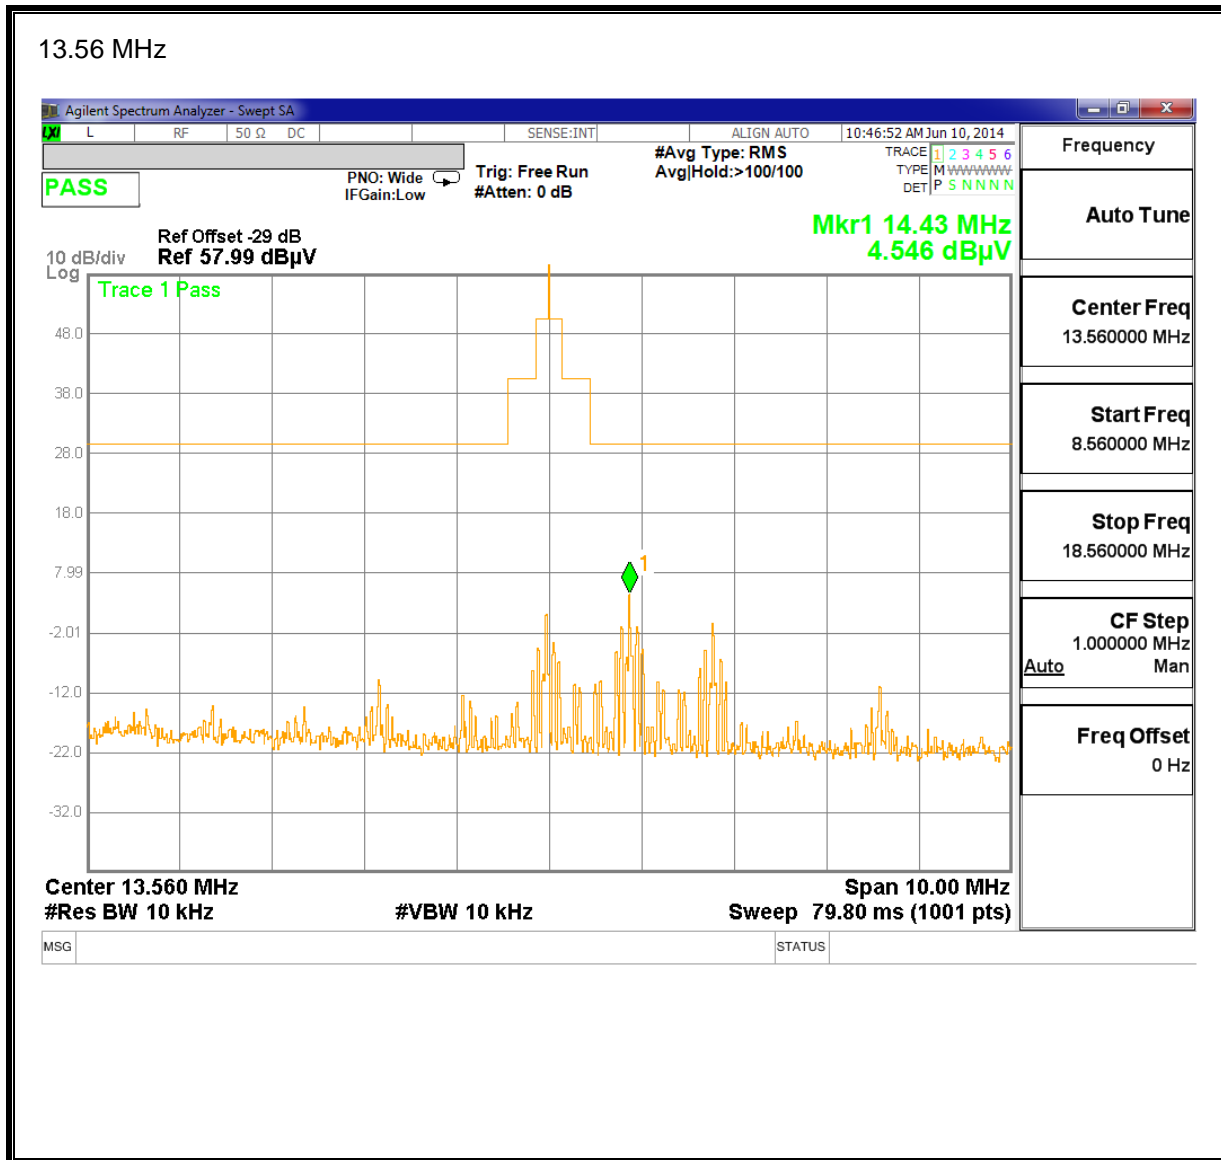


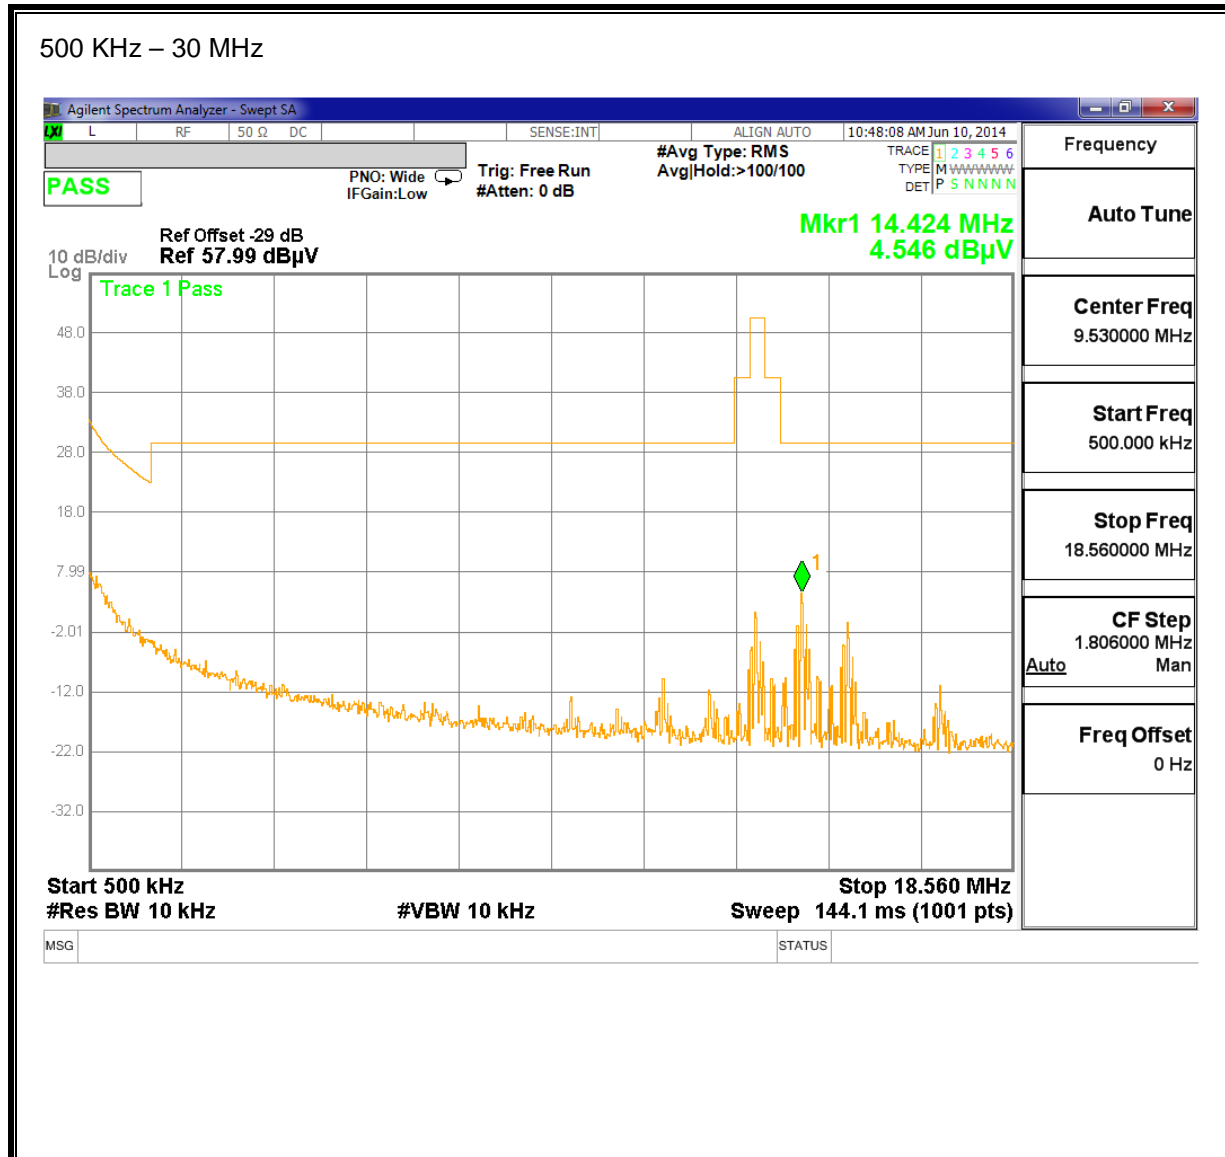


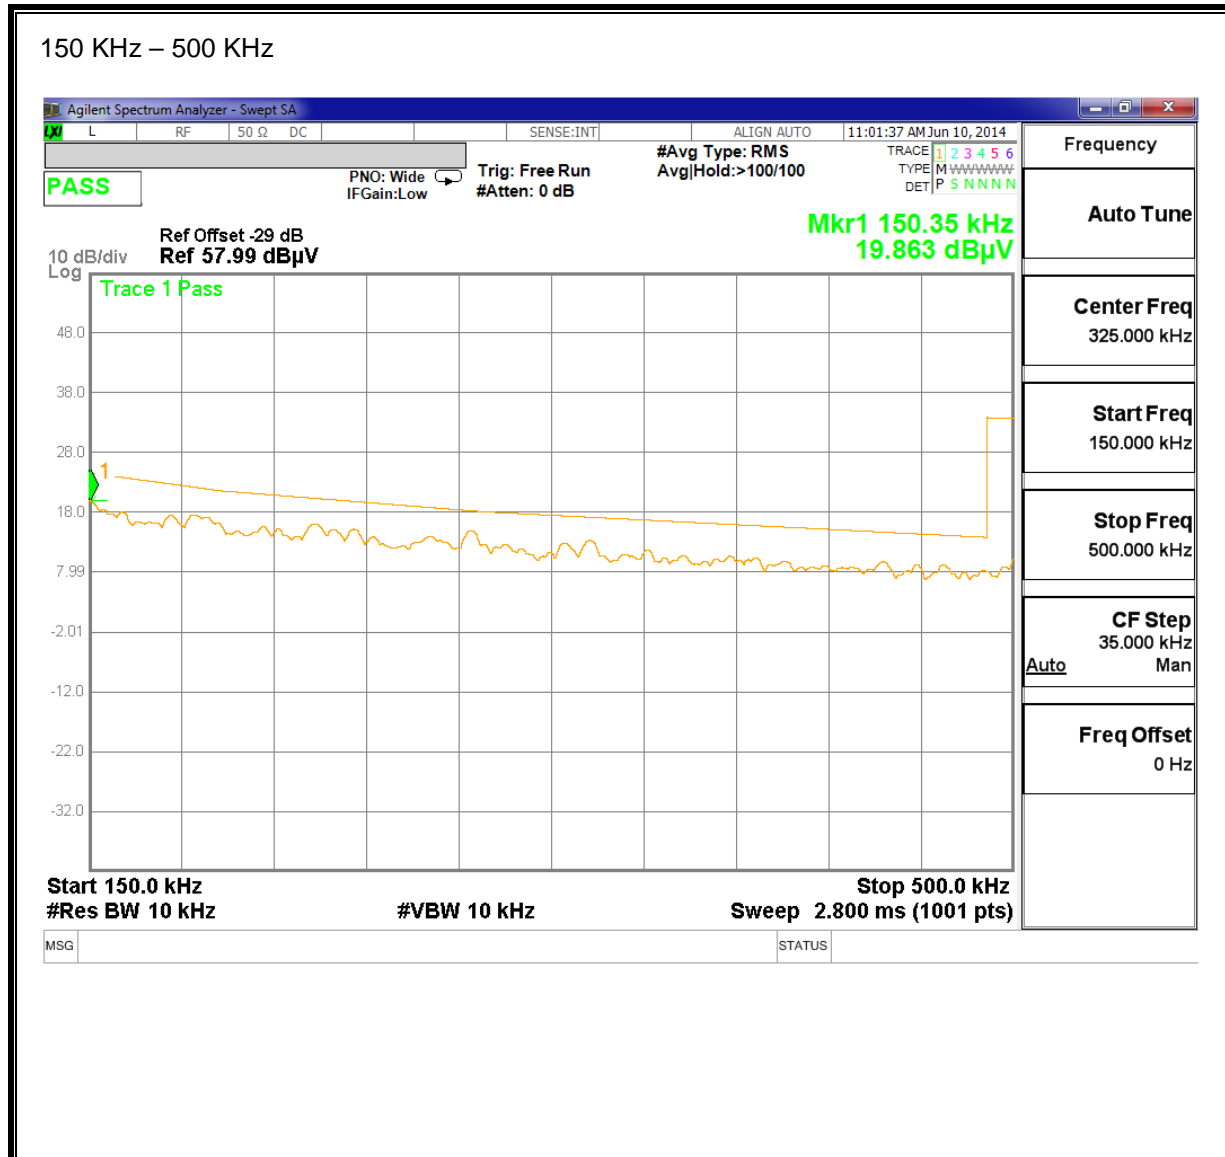

8.1.2. TYPE B FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)


TYPE B, 424 Kbps, ANTENNA FACE ON

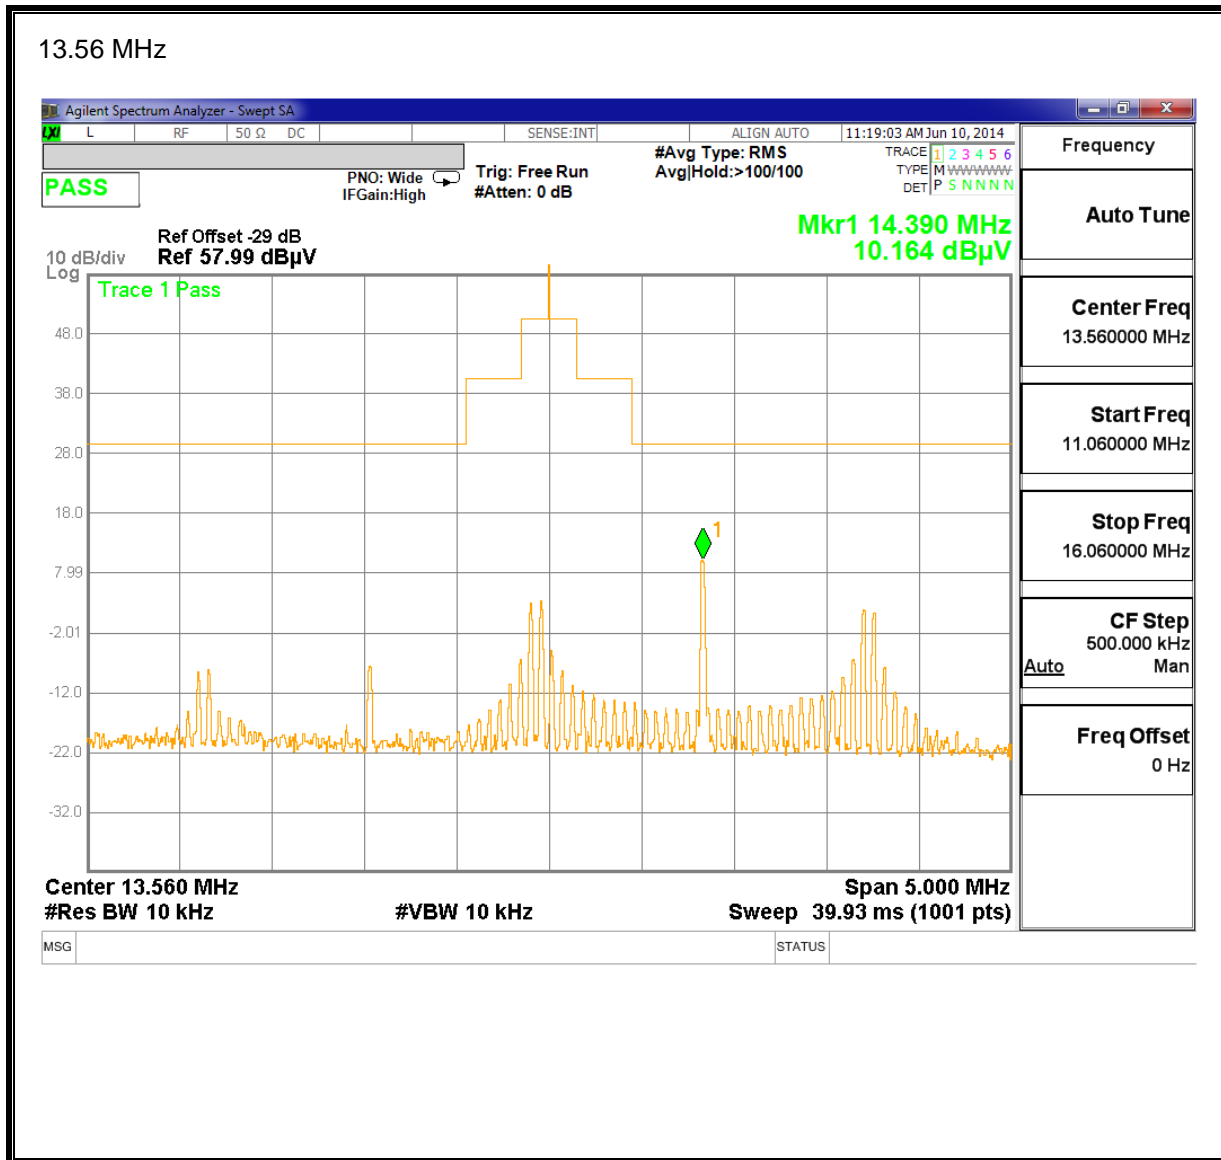

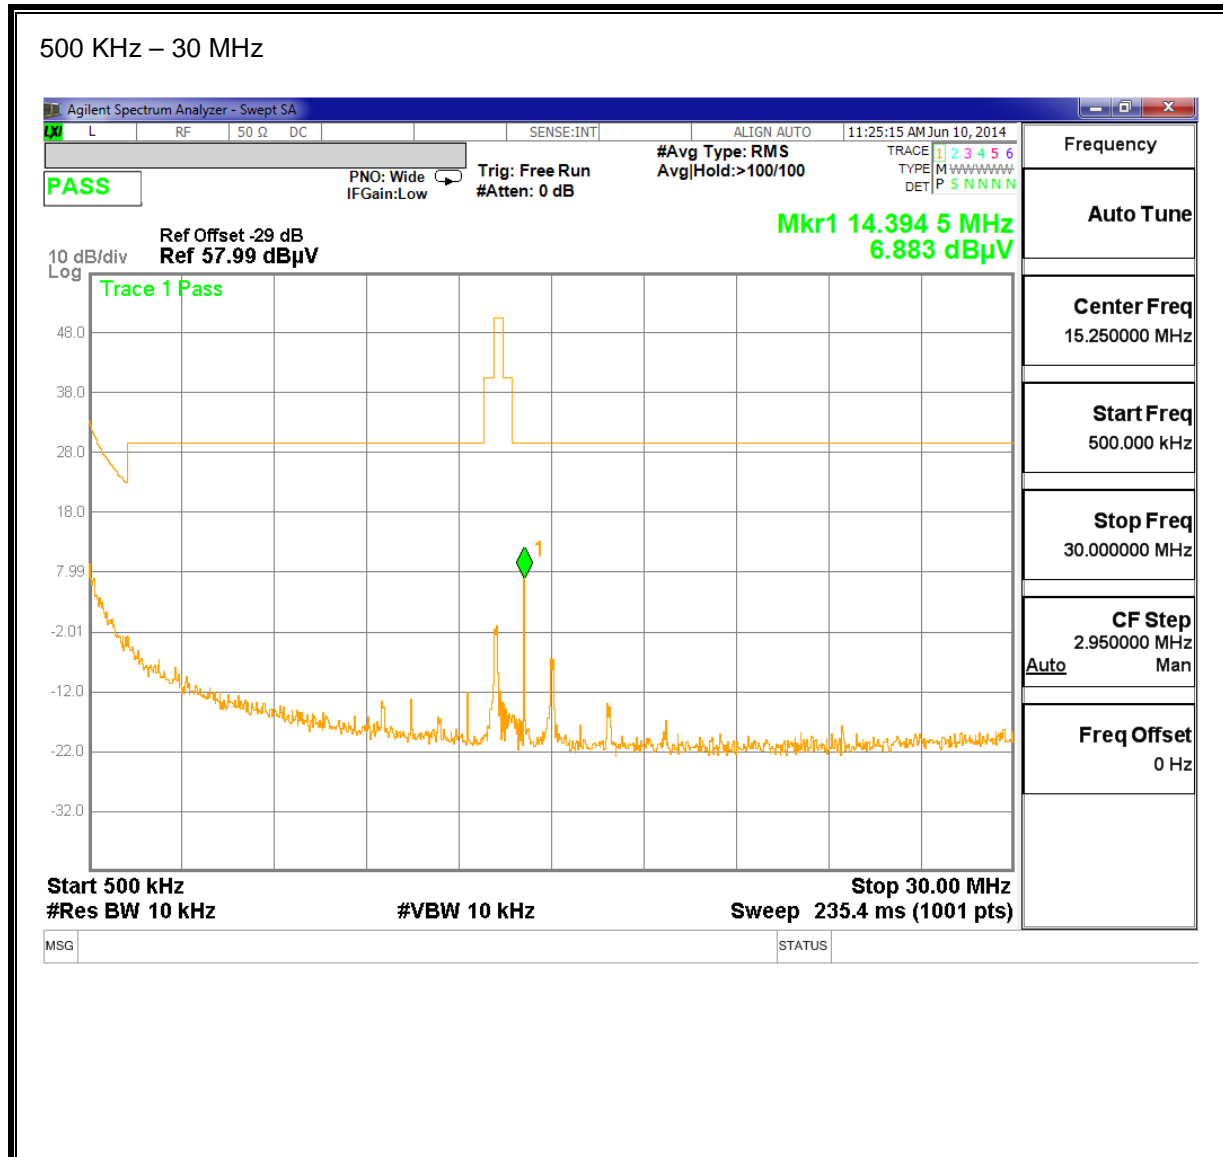


8.1.3. TYPE A TX SPURIOUS EMISSION 30 TO 1000 MHz

TYPE A, 424 Kbps

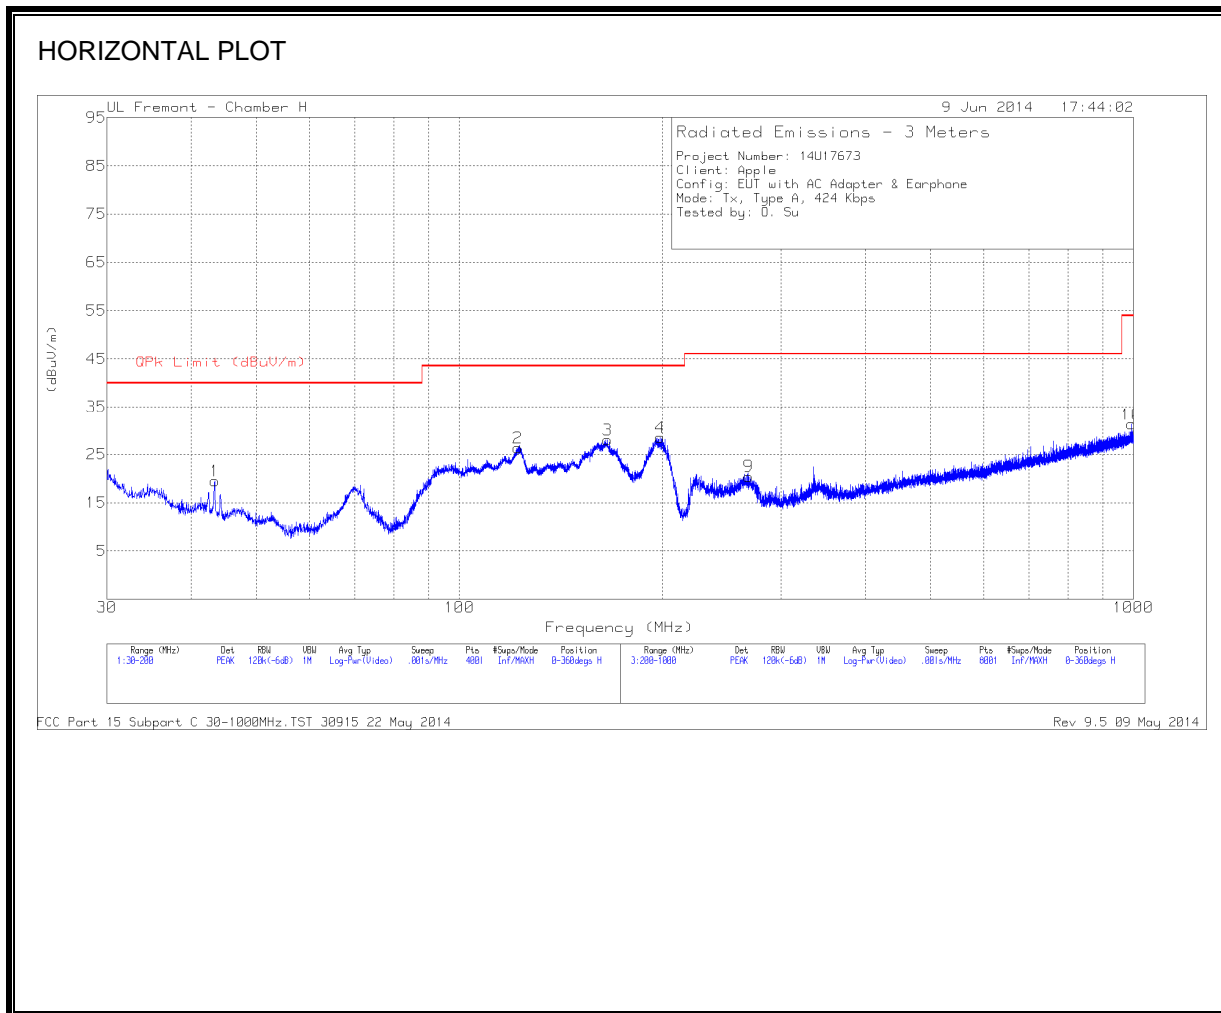

VERTICAL PLOT

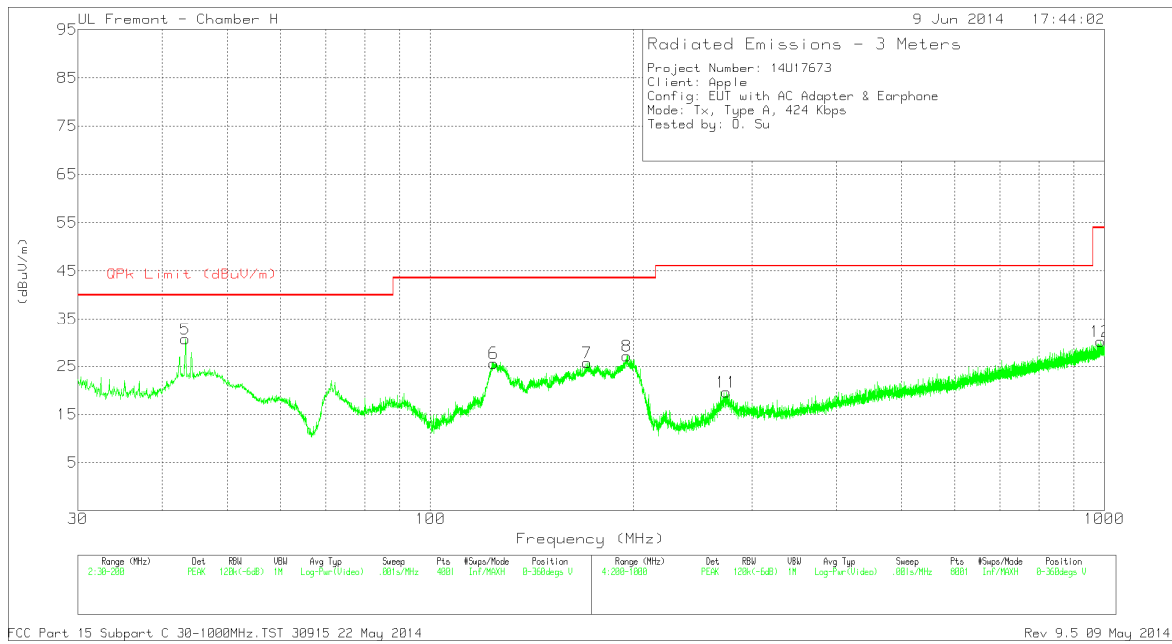

HORIZONTAL AND VERTICAL DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	SS JB3 SN A051314-1	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 122.0125	39.54	PK	16.7	-29.9	26.34	43.52	-17.18	0-360	200	H
3	* 165.83	42.48	PK	15	-29.5	27.98	43.52	-15.54	0-360	200	H
6	* 124.0525	38.76	PK	16.8	-29.9	25.66	43.52	-17.86	0-360	100	V
7	* 170.93	40.54	PK	14.7	-29.5	25.74	43.52	-17.78	0-360	100	V
9	* 268.6	33.36	PK	15.8	-28.7	20.46	46.02	-25.56	0-360	100	H
10	* 992.5	29.19	PK	26.3	-24.2	31.29	53.97	-22.68	0-360	100	H
11	* 274.6	32.23	PK	16.1	-28.7	19.63	46.02	-26.39	0-360	100	V
12	* 987.1	28.24	PK	26.2	-24.3	30.14	53.97	-23.83	0-360	200	V
5	43.3025	46.76	PK	14.7	-30.8	30.66	40	-9.34	0-360	100	V
1	43.345	35.6	PK	14.7	-30.8	19.5	40	-20.5	0-360	400	H
8	195.5375	41.54	PK	14.9	-29.3	27.14	43.52	-16.38	0-360	100	V
4	198.5125	42.29	PK	15.4	-29.2	28.49	43.52	-15.03	0-360	98	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

FCC Part 15 Subpart C 30-1000MHz.TST 30915 22 May 2014


Rev 9.5 09 May 2014

8.1.4. TYPE B TX SPURIOUS EMISSION 30 TO 1000 MHz

TYPE B, 424 Kbps

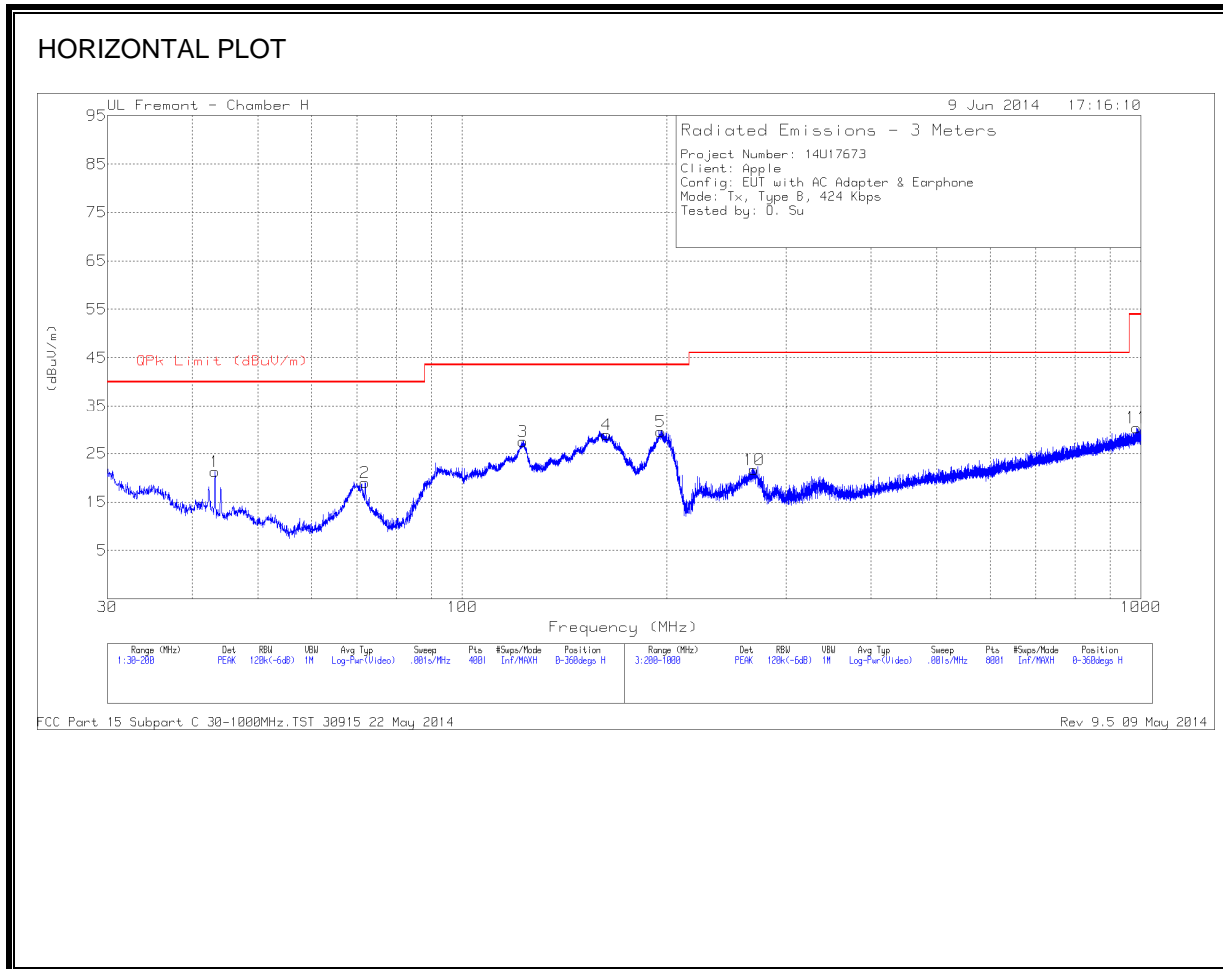

VERTICAL PLOT

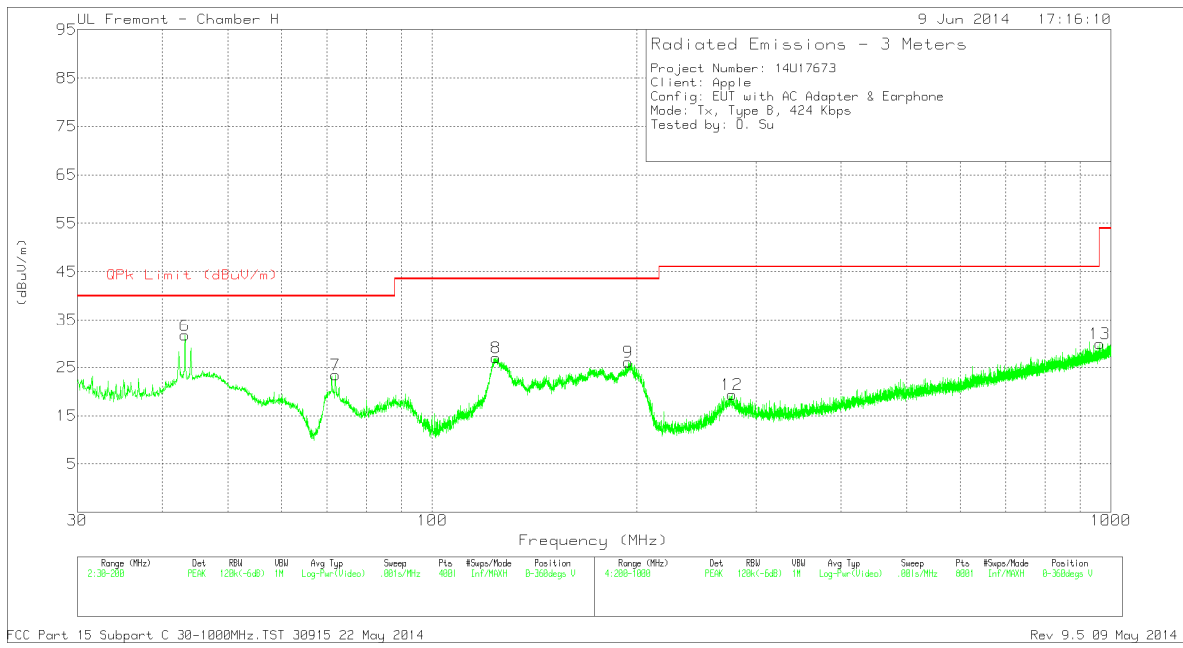

HORIZONTAL AND VERTICAL DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	SS JB3 SN A051314-1	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 122.7775	40.73	PK	16.7	-29.9	27.53	43.52	-15.99	0-360	200	H
4	* 163.195	43.25	PK	15.1	-29.5	28.85	43.52	-14.67	0-360	200	H
8	* 124.0525	40.09	PK	16.8	-29.9	26.99	43.52	-16.53	0-360	100	V
10	* 269.3	34.68	PK	15.8	-28.8	21.68	46.02	-24.34	0-360	100	H
11	* 985.3	28.46	PK	26.2	-24.3	30.36	53.97	-23.61	0-360	400	H
12	* 276.3	32	PK	16.1	-28.7	19.4	46.02	-26.62	0-360	100	V
13	* 962.4	28.8	PK	25.8	-24.7	29.9	53.97	-24.07	0-360	301	V
1	43.2175	37.29	PK	14.8	-30.8	21.29	40	-18.71	0-360	401	H
6	43.2175	47.67	PK	14.8	-30.8	31.67	40	-8.33	0-360	100	V
2	71.9475	38.24	PK	11.2	-30.4	19.04	40	-20.96	0-360	200	H
7	72.0325	42.59	PK	11.2	-30.4	23.39	40	-16.61	0-360	100	V
9	194.6025	40.65	PK	14.7	-29.2	26.15	43.52	-17.37	0-360	100	V
5	195.8775	43.9	PK	14.9	-29.3	29.5	43.52	-14.02	0-360	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

FCC Part 15 Subpart C 30-1000MHz.TST 30915 22 May 2014

Rev 9.5 09 May 2014

9. AC MAINS LINE CONDUCTED EMISSIONS

9.1. LIMITS AND PROCEDURE

LIMITS

§15.207
IC RSS-GEN, Section 7.2.2

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:
1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

TEST PROCEDURE

ANSI C63.4, 2009

RESULTS

No non-compliance noted:

9.2. TYPE A, 424 KBPS

9.2.1. WITHOUT DUMMY LOAD

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.762	46.06	PK	.3	0	46.36	56	-9.64	-	-
2	.762	33.1	Av	.3	0	33.4	-	-	46	-12.6
3	13.56	49.81	PK	.2	.2	50.21	60	-9.79	-	-
4	13.56	44.67	Av	.2	.2	45.07	-	-	50	-4.93
5	14.7255	43.51	PK	.2	.2	43.91	60	-16.09	-	-
6	14.7255	37.83	Av	.2	.2	38.23	-	-	50	-11.77


Line-L2 .15 - 30MHz

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
7	.762	44.19	PK	.3	0	44.49	56	-11.51	-	-
8	.762	27.81	Av	.3	0	28.11	-	-	46	-17.89
9	13.56	48.25	PK	.3	.2	48.75	60	-11.25	-	-
10	13.56	42.89	Av	.3	.2	43.39	-	-	50	-6.61
11	14.7255	42.51	PK	.3	.2	43.01	60	-16.99	-	-
12	14.7255	37.54	Av	.3	.2	38.04	-	-	50	-11.96

PK - Peak detector , Av - average detection

LINE 1 RESULTS

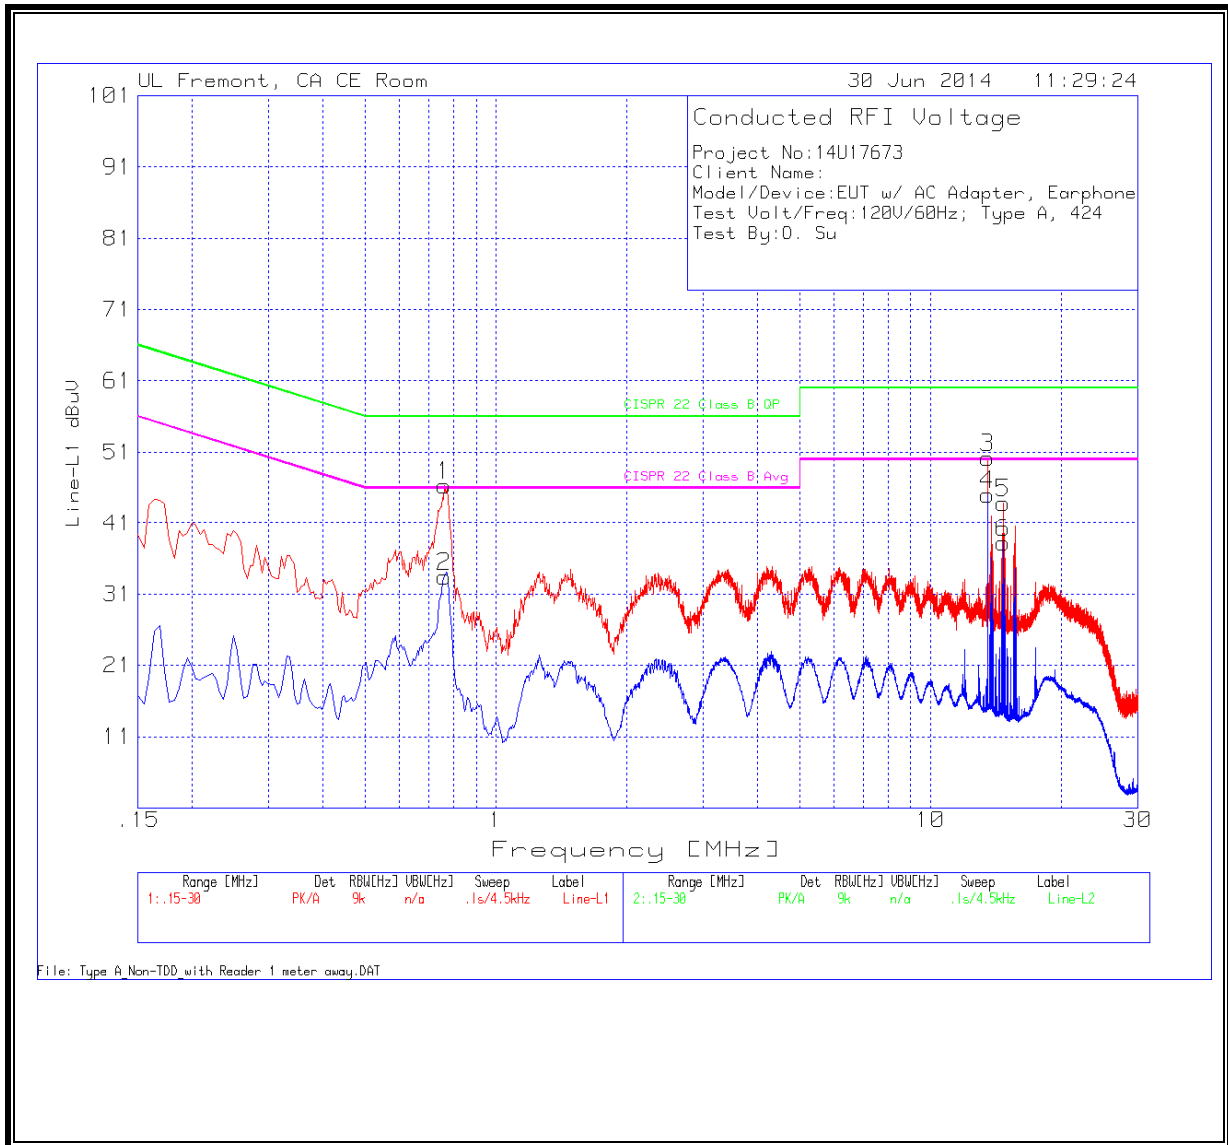

LINE 2 RESULTS

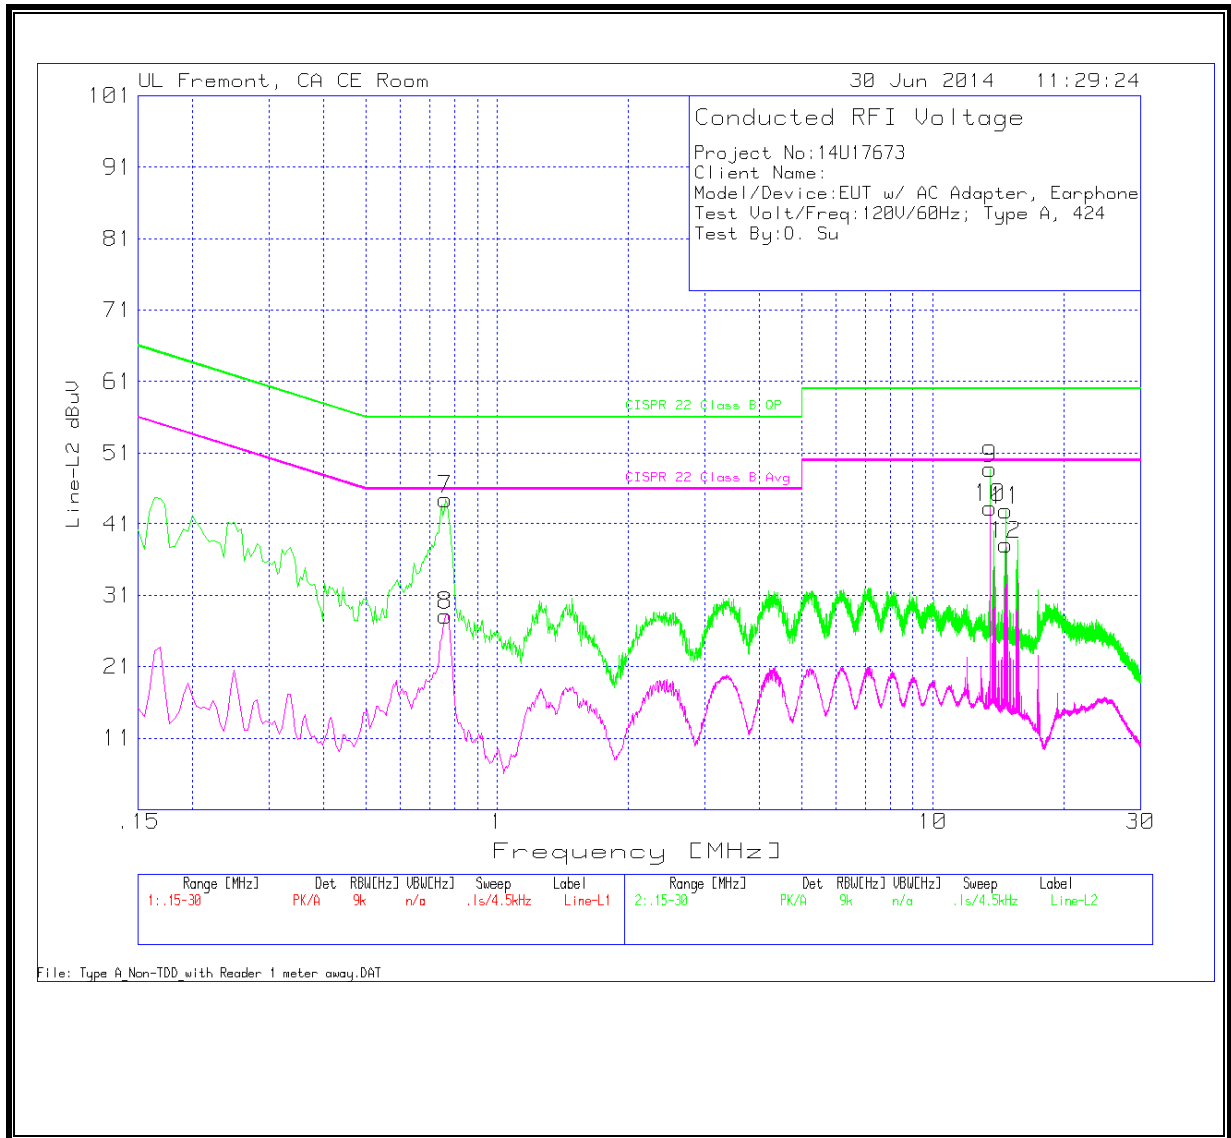

9.2.2. WITH DUMMY LOAD

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1635	47.97	PK	1.2	0	49.17	65.3	-16.13	-	-
2	.1635	35.01	Av	1.2	0	36.21	-	-	55.3	-19.09
3	.708	44.56	PK	.3	0	44.86	56	-11.14	-	-
4	.708	22.41	Av	.3	0	22.71	-	-	46	-23.29
5	18.0915	37.3	PK	.3	.2	37.8	60	-22.2	-	-
6	18.0915	21.36	Av	.3	.2	21.86	-	-	50	-28.14


Line-L2 .15 - 30MHz

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
7	.1545	48.44	PK	1.4	0	49.84	65.8	-15.96	-	-
8	.1545	30.95	Av	1.4	0	32.35	-	-	55.8	-23.45
9	.771	43.89	PK	.3	0	44.19	56	-11.81	-	-
10	.771	23.8	Av	.3	0	24.1	-	-	46	-21.9
11	18.4515	35.53	PK	.3	.2	36.03	60	-23.97	-	-
12	18.4515	21.85	Av	.3	.2	22.35	-	-	50	-27.65

PK - Peak detector , Av - average detection

LINE 1 RESULTS

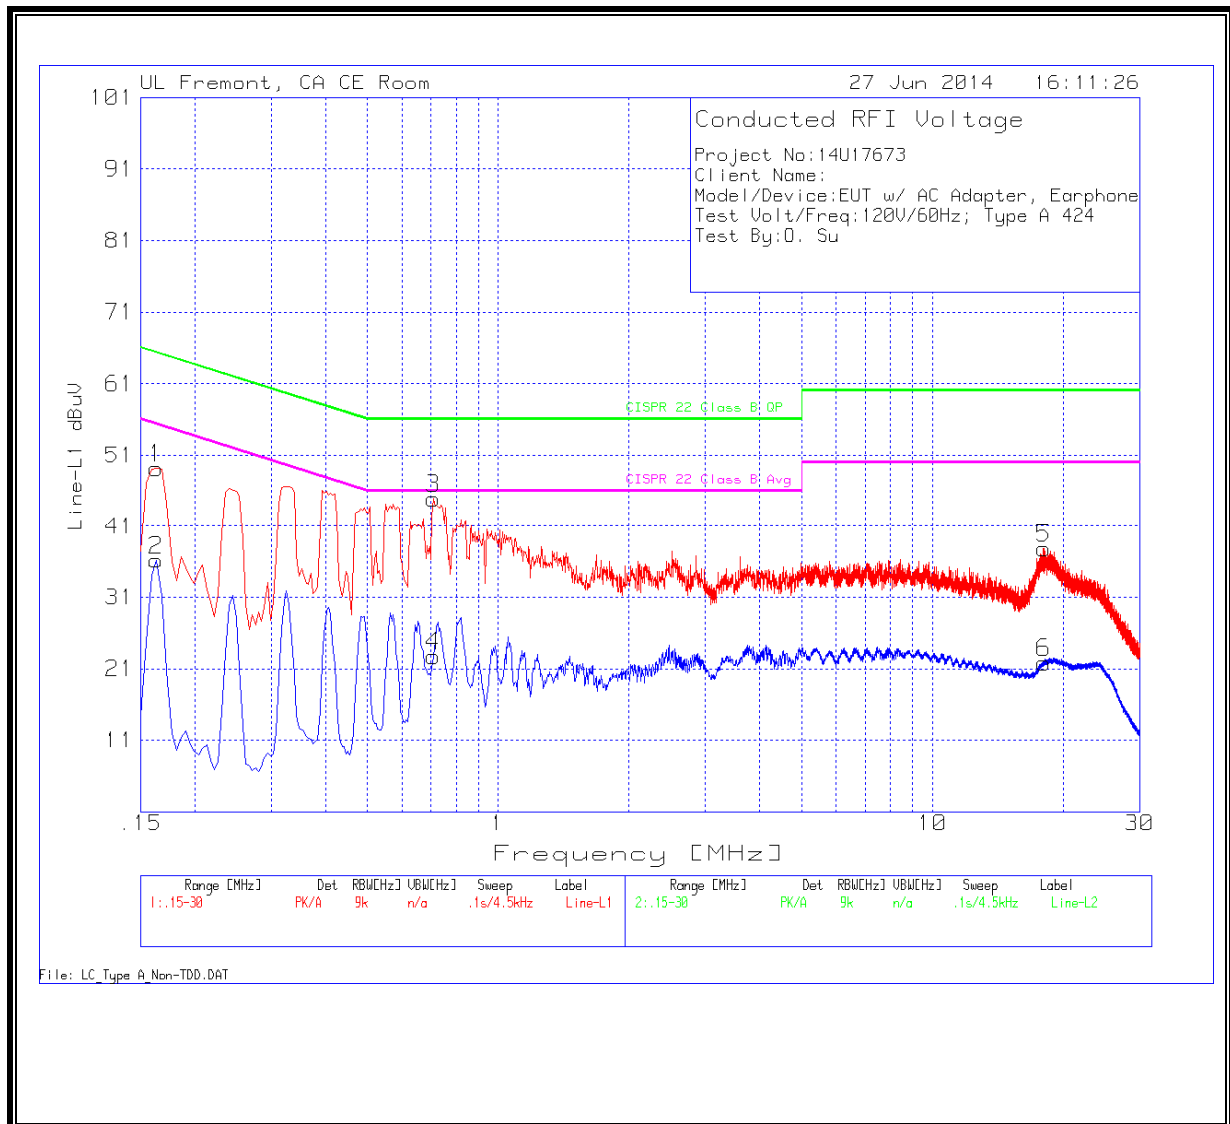

LINE 2 RESULTS

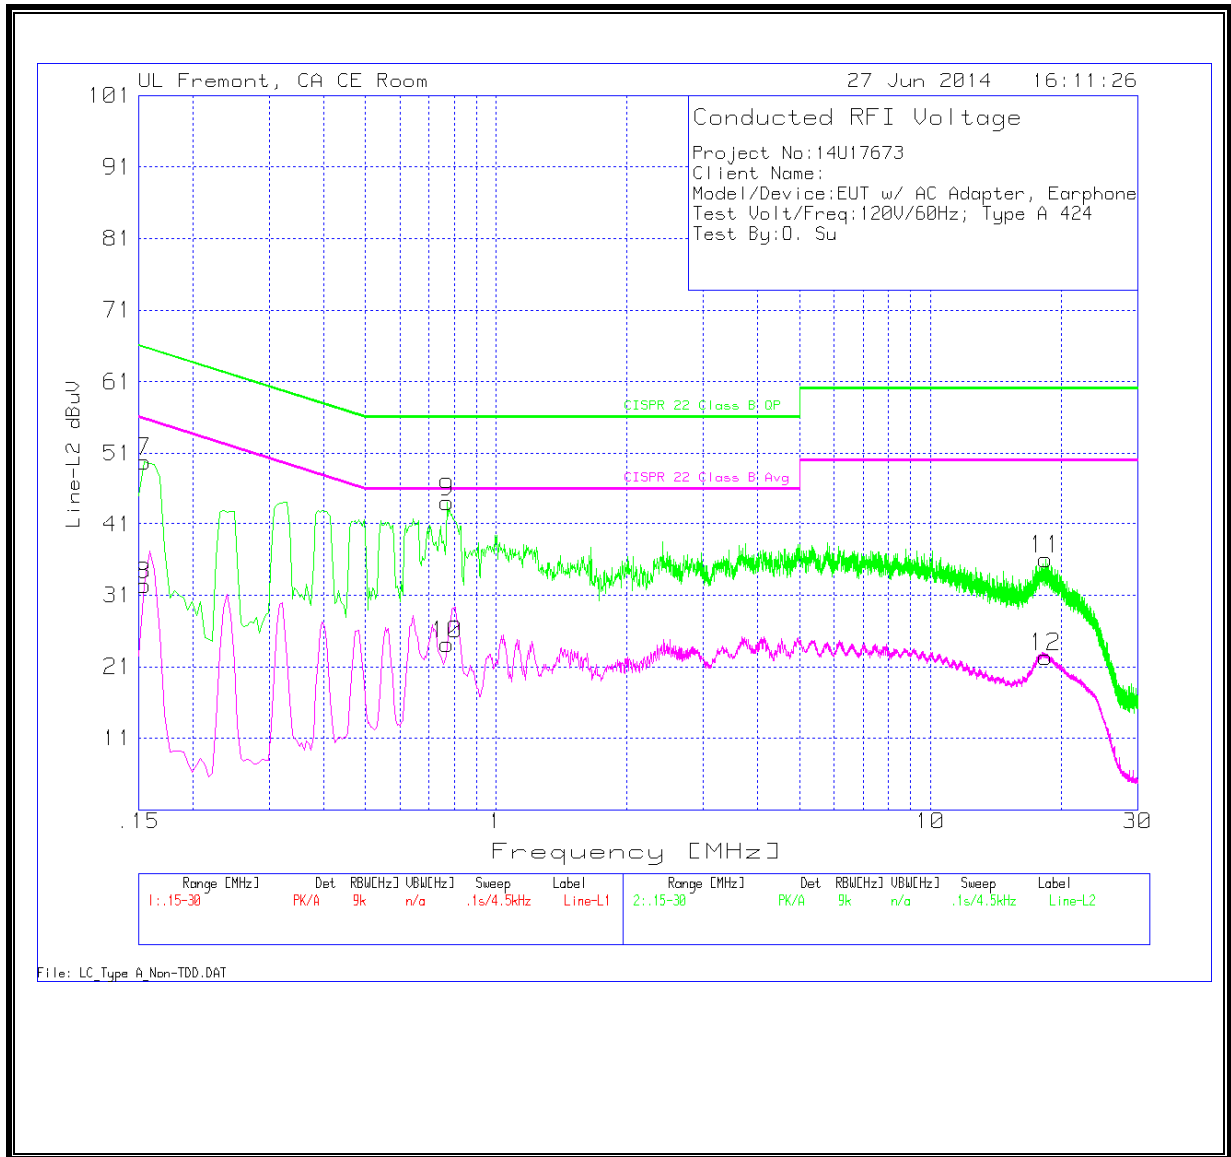

9.3. TYPE B, 424 KBPS

9.3.1. WITHOUT DUMMY LOAD

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1635	50.49	PK	1.2	0	51.69	65.3	-13.61	-	-
2	.1635	28.58	Av	1.2	0	29.78	-	-	55.3	-25.52
3	.7935	39.36	PK	.3	0	39.66	56	-16.34	-	-
4	.7935	26.4	Av	.3	0	26.7	-	-	46	-19.3
7	.7935	39.36	PK	.3	0	39.66	56	-16.34	-	-
8	.7935	26.4	Av	.3	0	26.7	-	-	46	-19.3
5	14.4105	56.08	PK	.2	.2	56.48	60	-3.52	-	-
6	14.4105	51.5	Av	.2	.2	51.9	-	-	50	1.9


Line-L2 .15 - 30MHz

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
9	.1635	48.21	PK	1.3	0	49.51	65.3	-15.79	-	-
10	.1635	26.65	Av	1.3	0	27.95	-	-	55.3	-27.35
11	.5955	42.91	PK	.3	0	43.21	56	-12.79	-	-
12	.5955	29.75	Av	.3	0	30.05	-	-	46	-15.95
13	14.4105	57.21	PK	.3	.2	57.71	60	-2.29	-	-
14	14.4105	52.65	Av	.3	.2	53.15	-	-	50	3.15

PK - Peak detector , Av - average detection

LINE 1 RESULTS

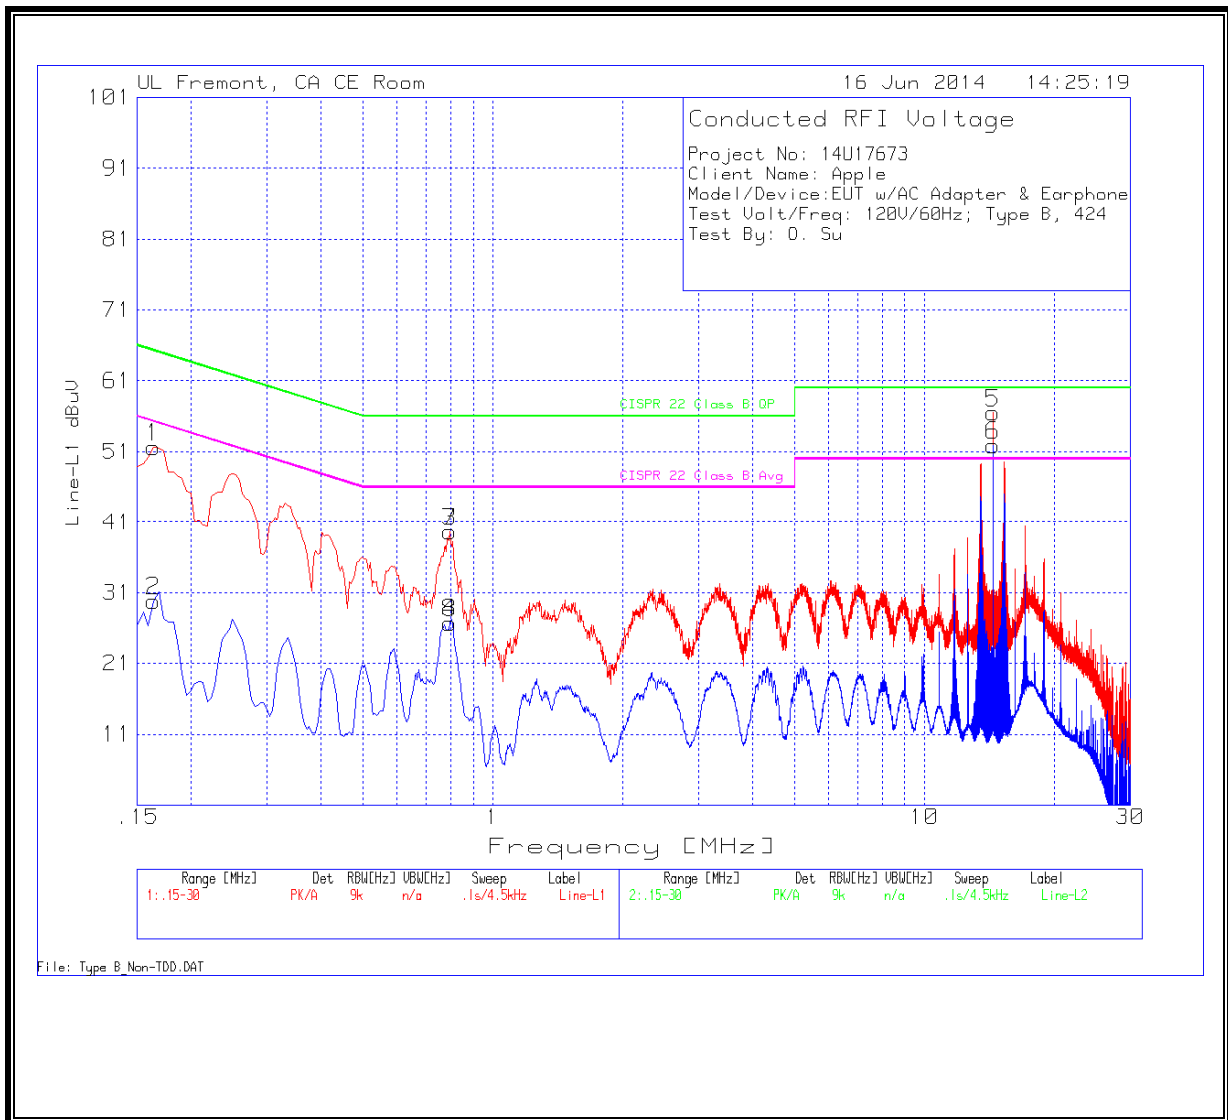

LINE 2 RESULTS

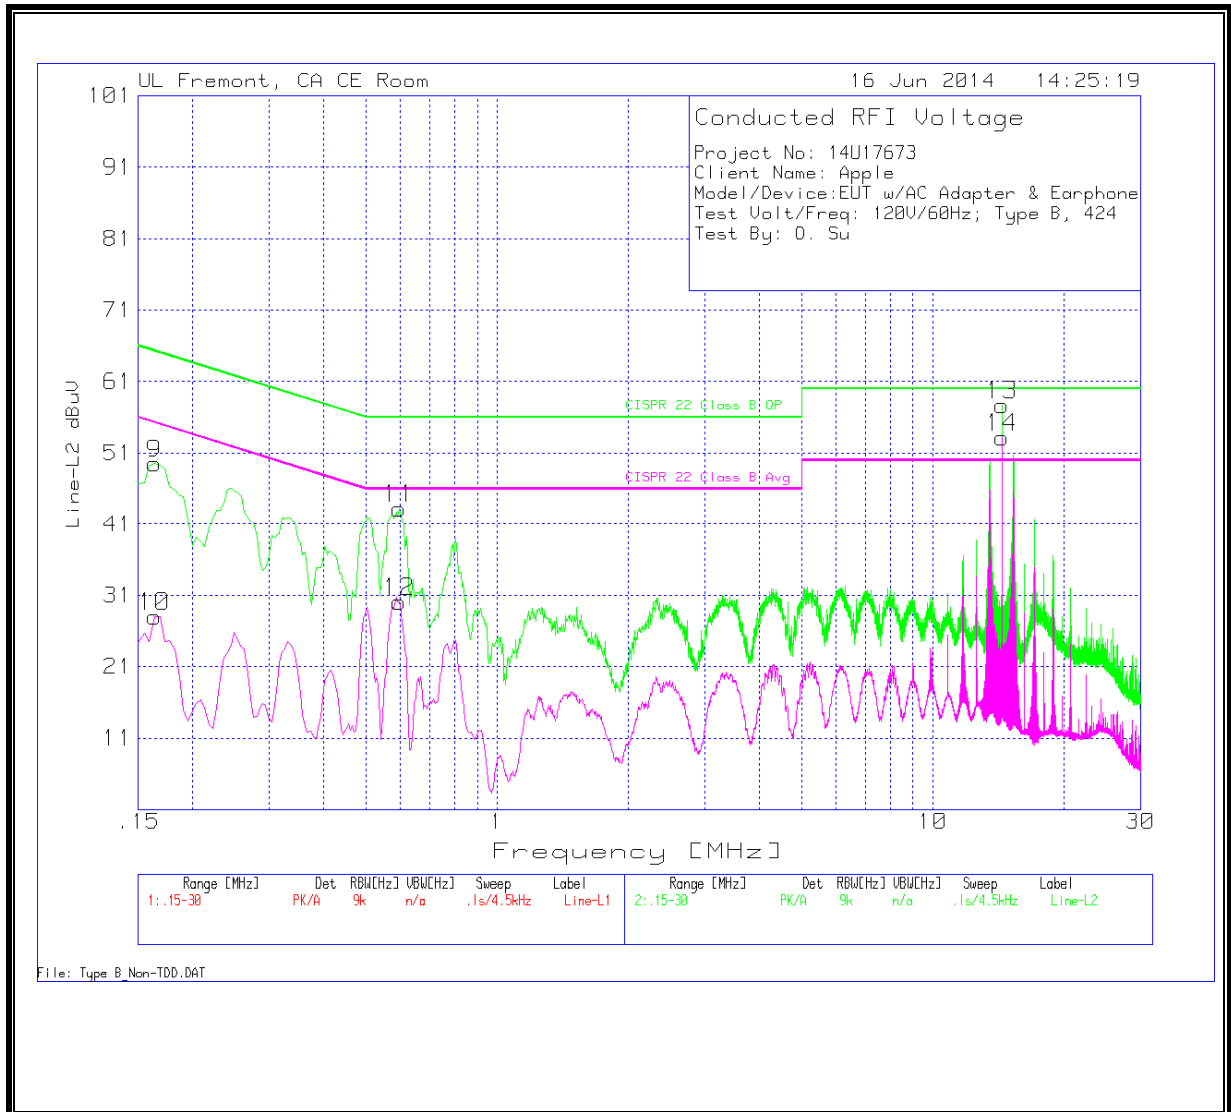

9.3.2. WITH DUMMY LOAD

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.168	44.1	PK	1.2	0	45.3	65.1	-19.8	-	-
2	.168	25.23	Av	1.2	0	26.43	-	-	55.1	-28.67
3	.7575	44.63	PK	.3	0	44.93	56	-11.07	-	-
4	.7575	29.43	Av	.3	0	29.73	-	-	46	-16.27
5	18.492	29.23	PK	.3	.2	29.73	60	-30.27	-	-
6	18.492	12.63	Av	.3	.2	13.13	-	-	50	-36.87


Line-L2 .15 - 30MHz

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
7	.168	43.56	PK	1.3	0	44.86	65.1	-20.24	-	-
8	.168	25.8	Av	1.3	0	27.1	-	-	55.1	-28
9	.7665	45.35	PK	.3	0	45.65	56	-10.35	-	-
10	.7665	31.74	Av	.3	0	32.04	-	-	46	-13.96
11	18.465	27.12	PK	.3	.2	27.62	60	-32.38	-	-
12	18.465	16.51	Av	.3	.2	17.01	-	-	50	-32.99

PK - Peak detector , Av - average detection

LINE 1 RESULTS

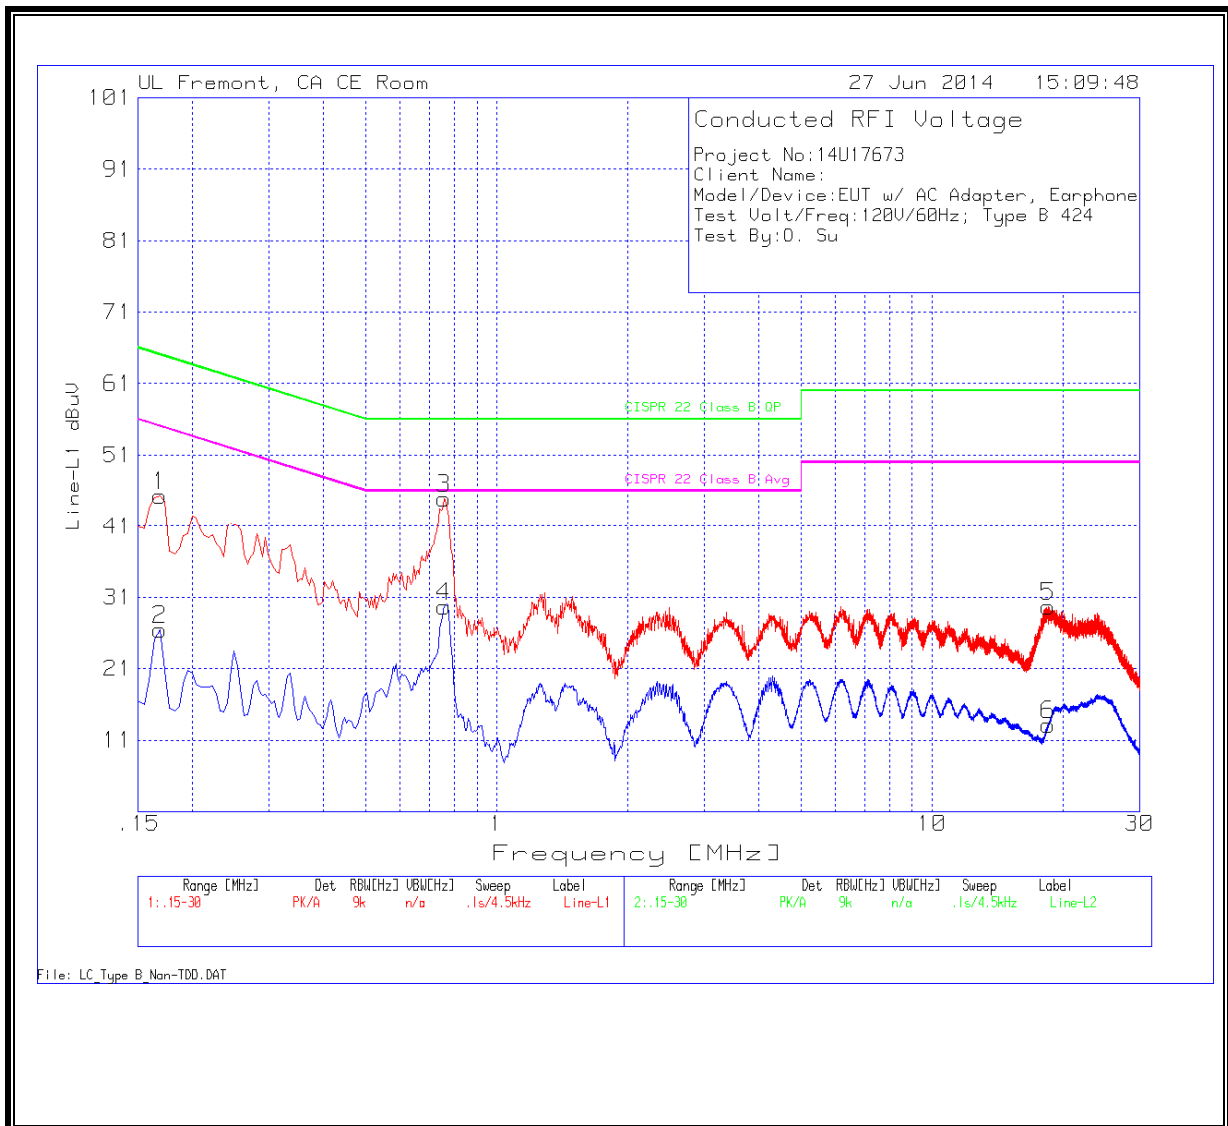

LINE 2 RESULTS

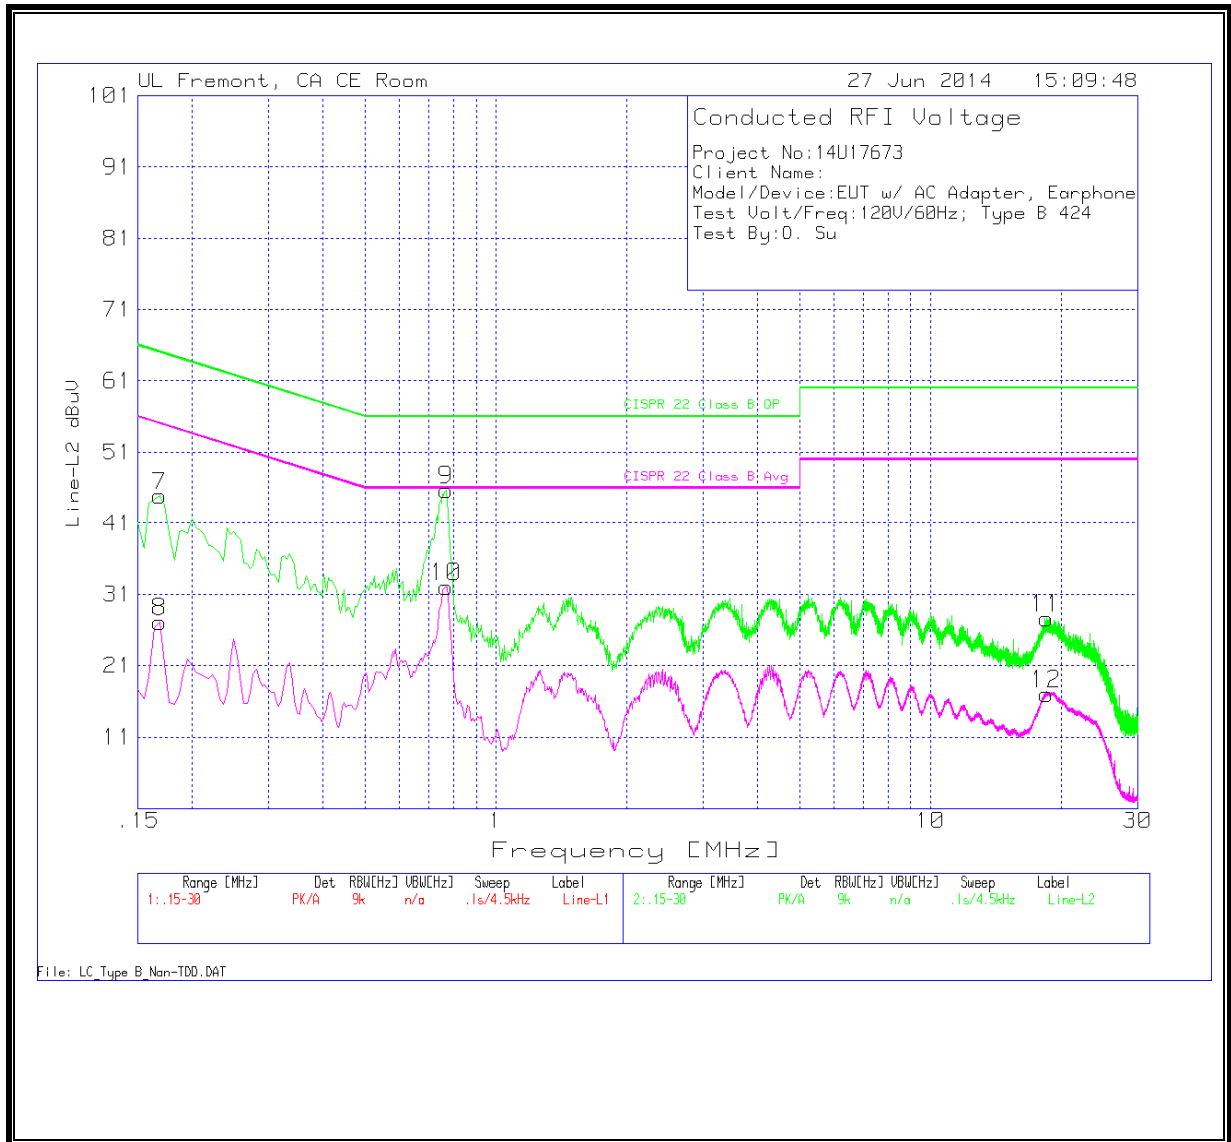

10. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.3.1 and 2.3.2

RESULTS

No non-compliance noted.

TYPE A, 424 Kbps

Reference Frequency: EUT Channel 13.560 MHz @ 20°C				
Limit: ± 100 ppm = 1.356 kHz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.5602167	-0.804	± 100
3.80	40	13.5602150	-0.678	± 100
3.80	30	13.5602165	-0.789	± 100
3.80	20	13.5602058	0.000	± 100
3.80	10	13.5602154	-0.708	± 100
3.80	0	13.5602148	-0.664	± 100
3.80	-10	13.5602139	-0.597	± 100
3.80	-20	13.5602132	-0.546	± 100
3.40	20	13.5602078	-0.147	± 100
4.30	20	13.5602088	-0.221	± 100

TYPE B, 424Kbps

Reference Frequency: EUT Channel 13.560 MHz @ 20°C				
Limit: ± 100 ppm = 1.356 kHz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.5602128	-0.796	± 100
3.80	40	13.5602130	-0.811	± 100
3.80	30	13.5602142	-0.900	± 100
3.80	20	13.5602020	0.000	± 100
3.80	10	13.5602142	-0.900	± 100
3.80	0	13.5602140	-0.885	± 100
3.80	-10	13.5602132	-0.826	± 100
3.80	-20	13.5602129	-0.804	± 100
3.40	20	13.5602025	-0.037	± 100
4.30	20	13.5602028	-0.059	± 100