
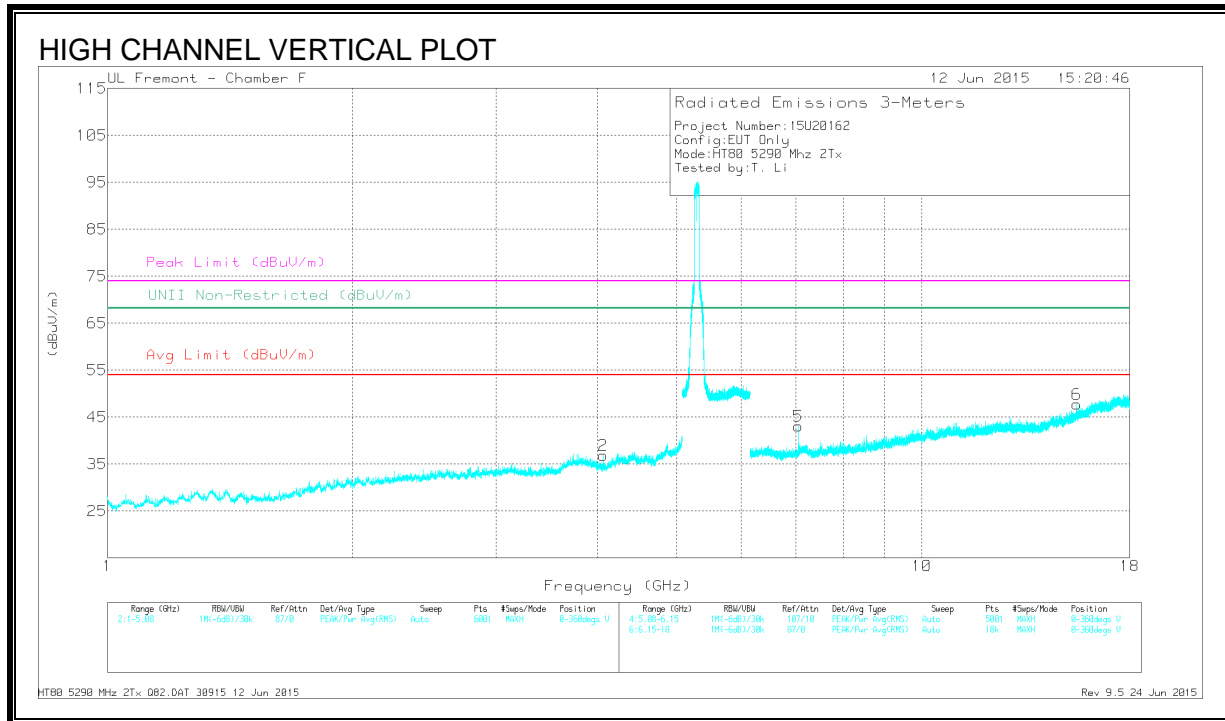


HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

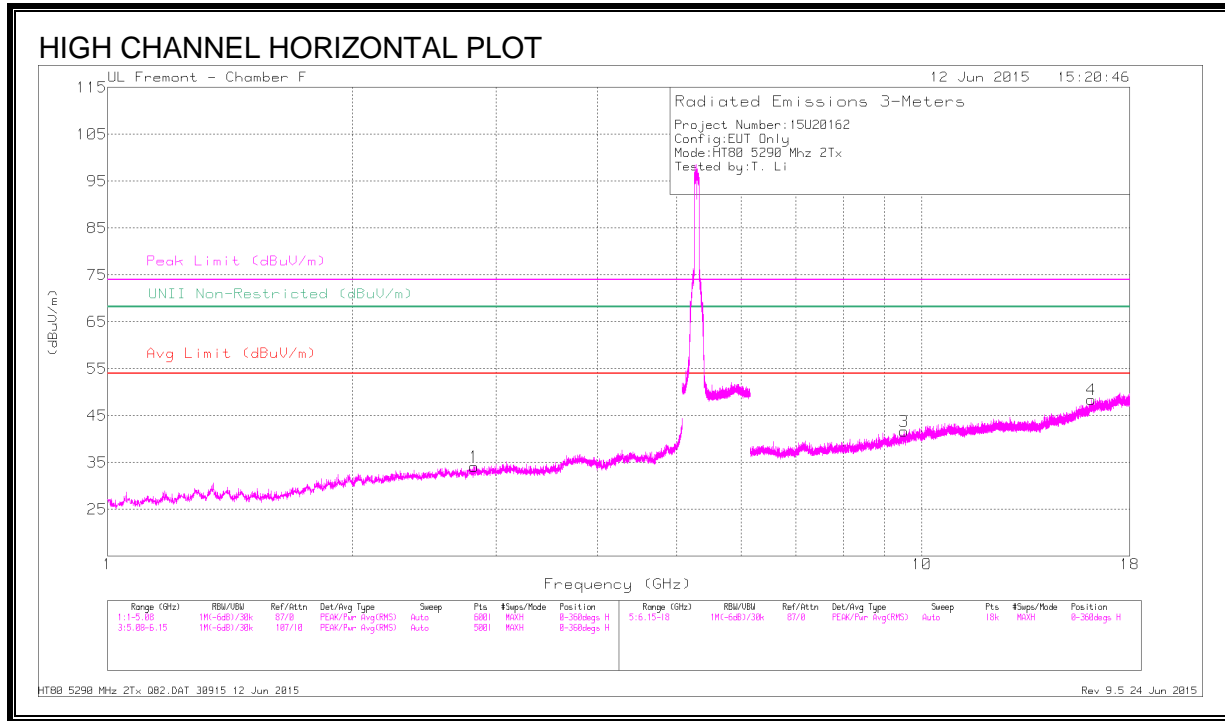

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.816	40.31	PK-U	32.5	-29.6	0	43.21	-	-	74	-30.79	-	-	227	168	H
	* 2.816	28.33	ADR	32.5	-29.6	.21	31.44	54	-22.56	-	-	-	-	227	168	H
2	* 4.06	38.21	PK-U	33.4	-28.9	0	42.71	-	-	74	-31.29	-	-	197	215	V
	* 4.06	26.87	ADR	33.4	-28.9	.21	31.58	54	-22.42	-	-	-	-	197	215	V
3	9.507	33.98	PK-U	36.6	-21.7	0	48.88	-	-	-	-	68.2	-19.32	97	156	H
4	* 16.142	34.86	PK-U	41.3	-20	0	56.16	-	-	74	-17.84	-	-	146	193	H
	* 16.145	23.63	ADR	41.3	-20	.21	45.14	54	-8.86	-	-	-	-	146	193	H
5	7.053	39.39	PK-U	35.5	-26.1	0	48.79	-	-	-	-	68.2	-19.41	117	325	V
6	* 15.501	35.82	PK-U	40.6	-20.8	0	55.62	-	-	74	-18.38	-	-	109	212	V
	* 15.5	24.53	ADR	40.6	-20.8	.21	44.54	54	-9.46	-	-	-	-	109	212	V


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.14. 802.11n HT20 1Tx MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL)

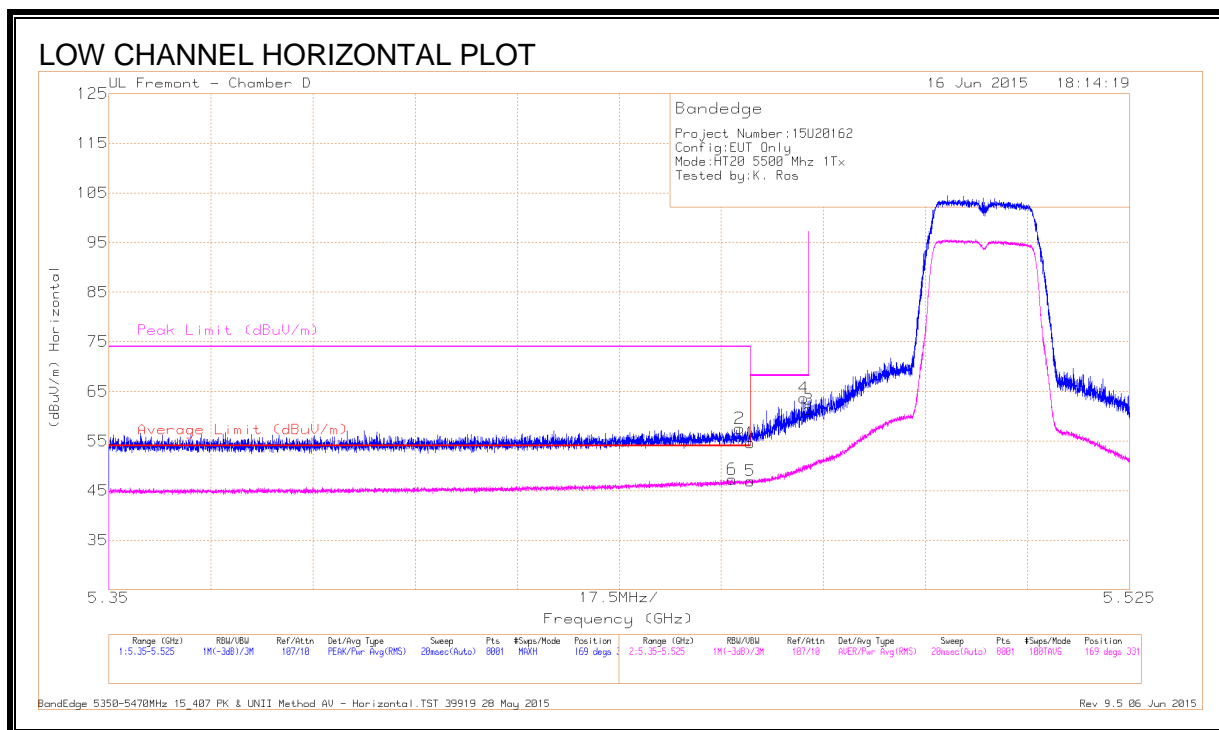


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.24	Pk	34.4	-18	54.64	-	-	74	-19.36	169	331	H
2	* 5.458	41.16	Pk	34.4	-18	57.56	-	-	74	-16.44	169	331	H
5	* 5.46	30.57	RMS	34.4	-18	46.97	54	-7.03	-	-	169	331	H
6	* 5.457	30.91	RMS	34.4	-18	47.31	54	-6.69	-	-	169	331	H
4	5.469	47.29	Pk	34.4	-18	63.69	-	-	68.2	-4.51	169	331	H
3	5.47	45	Pk	34.4	-18	61.4	-	-	68.2	-6.8	169	331	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

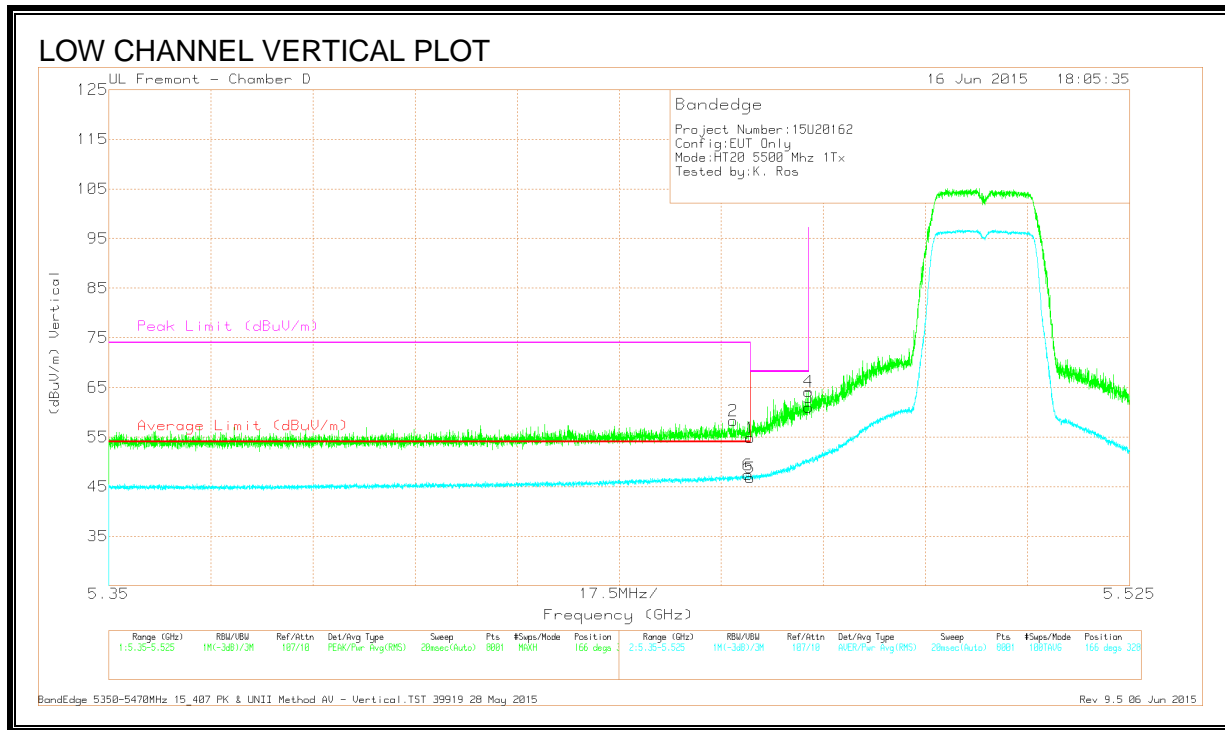

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.42	Pk	34.4	-18	54.82	-	-	74	-19.18	166	328	V
2	* 5.457	41.89	Pk	34.4	-18	58.29	-	-	74	-15.71	166	328	V
5	* 5.46	30.37	RMS	34.4	-18	46.77	54	-7.23	-	-	166	328	V
6	* 5.46	31	RMS	34.4	-18	47.4	54	-6.6	-	-	166	328	V
3	5.47	44.55	Pk	34.4	-18	60.95	-	-	68.2	-7.25	166	328	V
4	5.47	47.78	Pk	34.4	-18	64.18	-	-	68.2	-4.02	166	328	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEDGE, CHAIN 0 (HIGH CHANNEL)

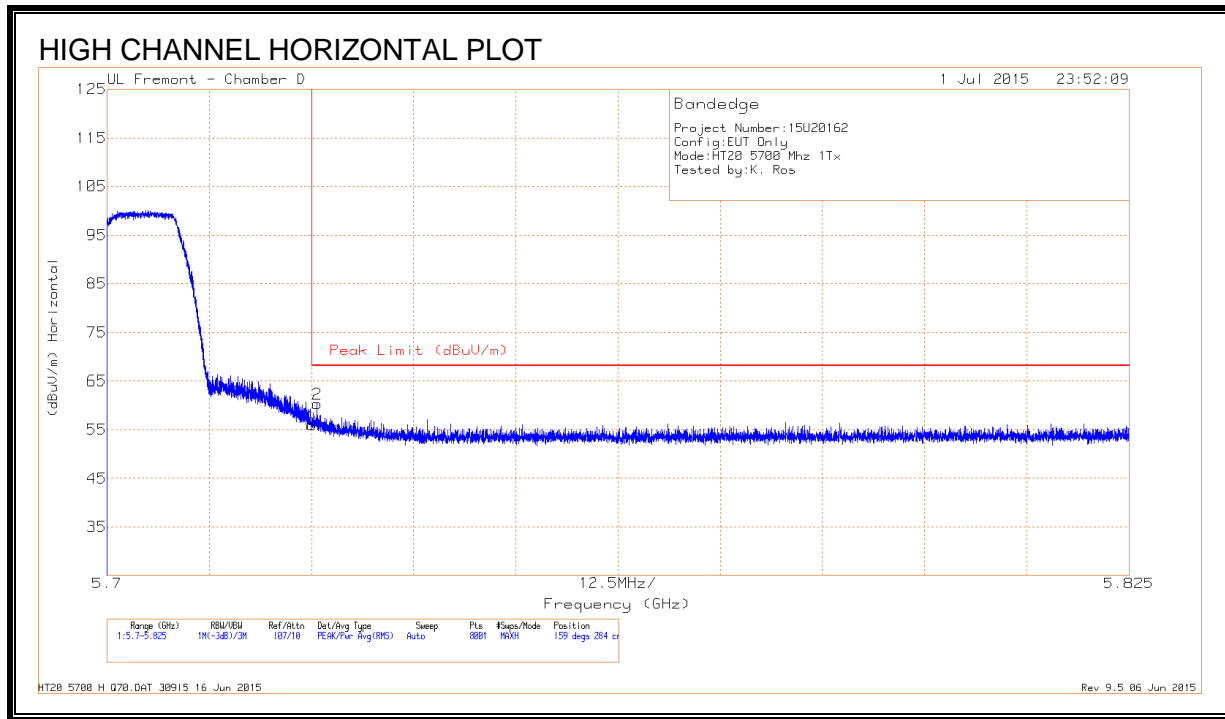

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.83	Pk	35	-22.9	55.93	68.2	-12.27	159	284	H
2	5.726	48.22	Pk	35	-22.9	60.32	68.2	-7.88	159	284	H

Pk - Peak detector


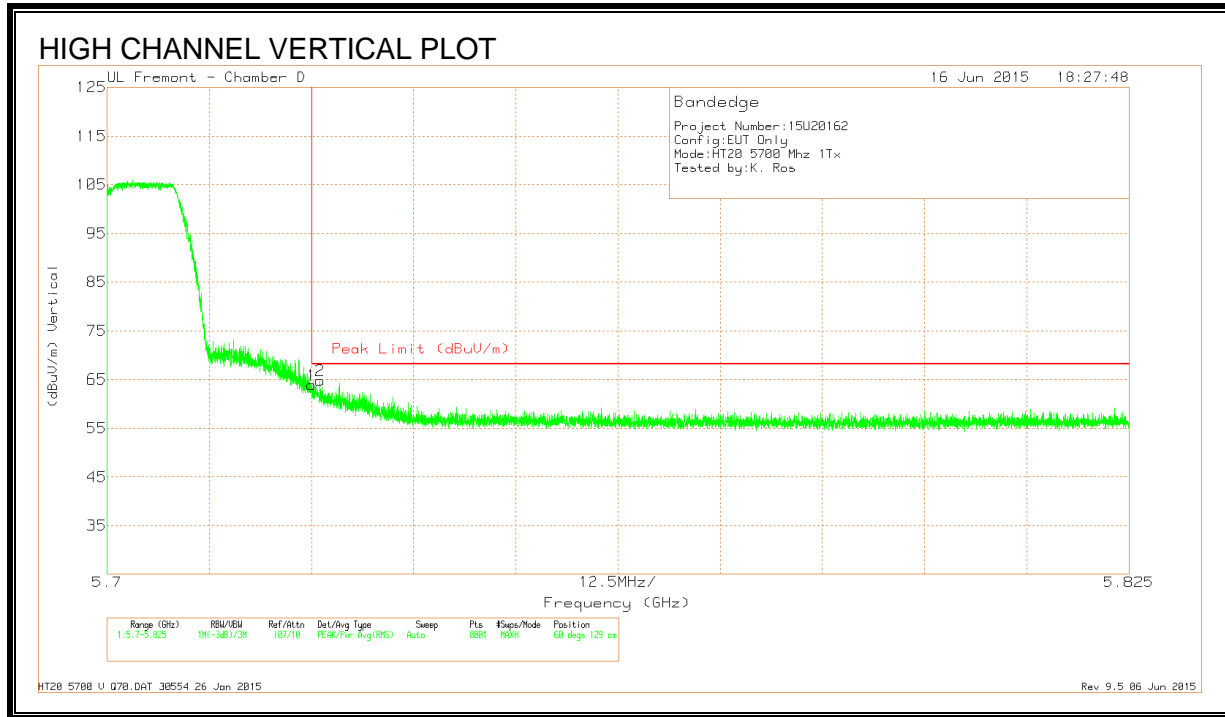


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.9	Pk	34.6	-17.6	63.9	68.2	-4.3	60	129	V
2	5.726	47.79	Pk	34.6	-17.6	64.79	68.2	-3.41	60	129	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

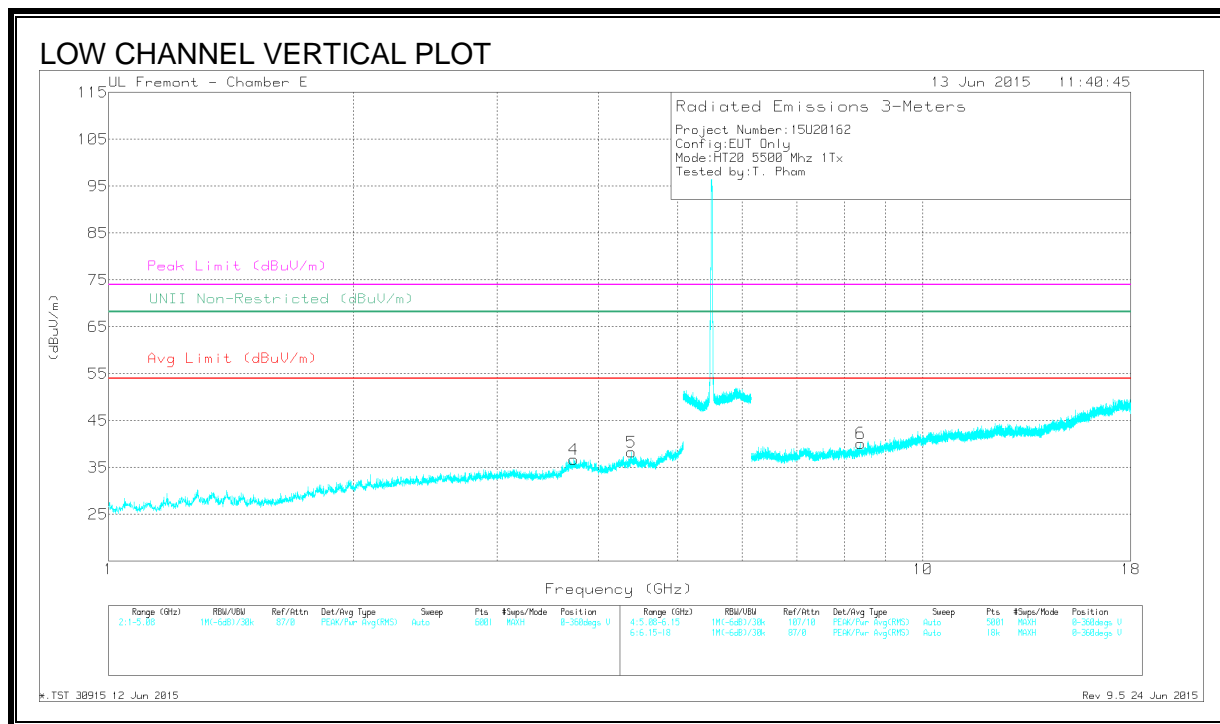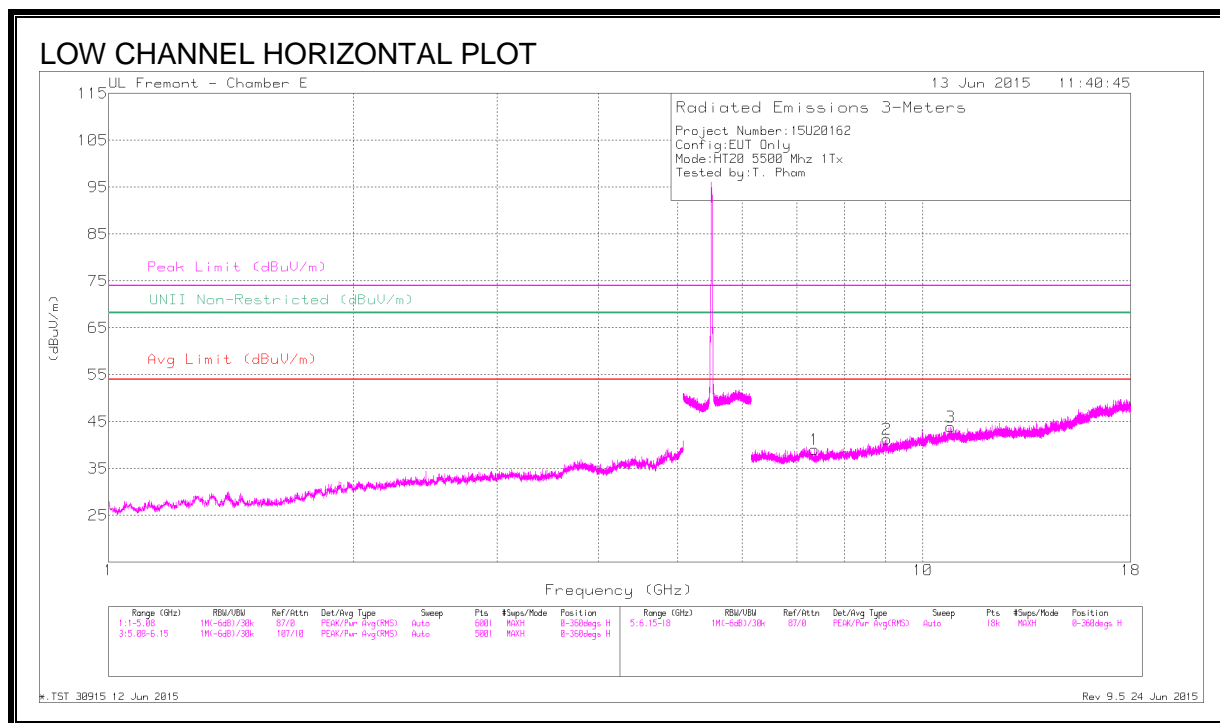

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 3.729	42.65	PK-U	33.2	-29.2	46.65	-	-	74	-27.35	-	-	323	230	V
	* 3.73	31.67	ADR	33.2	-29.2	35.67	54	-18.33	-	-	-	-	323	230	V
5	* 4.39	41.36	PK-U	33.9	-27.6	47.66	-	-	74	-26.34	-	-	248	173	V
	* 4.39	30.07	ADR	33.9	-27.6	36.37	54	-17.63	-	-	-	-	248	173	V
1	* 7.356	38.65	PK-U	35.5	-25.9	48.25	-	-	74	-25.75	-	-	104	267	H
	* 7.354	27.64	ADR	35.5	-25.9	37.24	54	-16.76	-	-	-	-	104	267	H
2	* 9.026	37.38	PK-U	36.1	-22.5	50.98	-	-	74	-23.02	-	-	218	288	H
	* 9.025	26.4	ADR	36.1	-22.5	40	54	-14	-	-	-	-	218	288	H
3	* 10.824	37.4	PK-U	38	-21.2	54.2	-	-	74	-19.8	-	-	156	228	H
	* 10.823	26.23	ADR	38	-21.1	43.13	54	-10.87	-	-	-	-	156	228	H
6	* 8.394	40.42	PK-U	35.7	-23.8	52.32	-	-	74	-21.68	-	-	252	276	V
	* 8.392	27.97	ADR	35.7	-23.7	39.97	54	-14.03	-	-	-	-	252	276	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

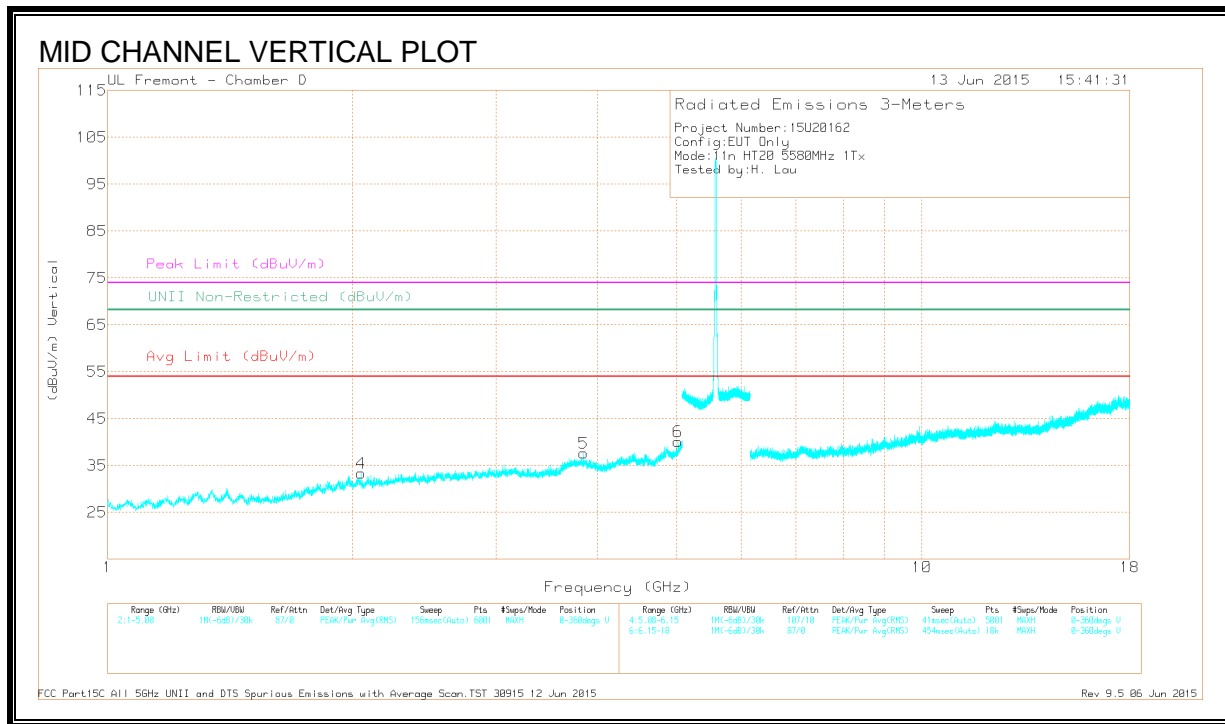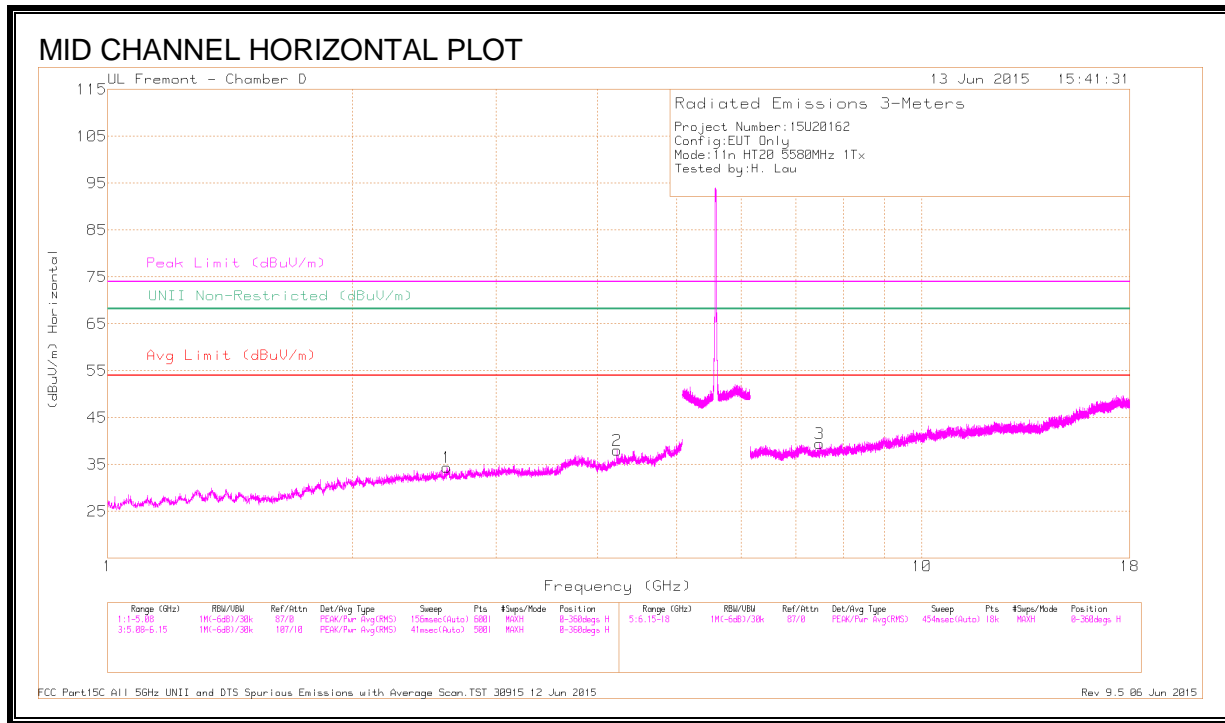

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.224	38.3	PK3	33.5	-27.7	44.1	-	-	74	-29.9	-	-	107	151	H
	* 4.225	26.6	ADR	33.5	-27.7	32.4	54	-21.6	-	-	-	-	107	151	H
5	* 3.843	38.85	PK3	33.4	-28.9	43.35	-	-	74	-30.65	-	-	193	157	V
	* 3.843	27.58	ADR	33.4	-28.9	32.08	54	-21.92	-	-	-	-	193	157	V
6	* 5.018	38.42	PK3	34.3	-26.2	46.52	-	-	74	-27.48	-	-	268	114	V
	* 5.017	26.56	ADR	34.3	-26.3	34.56	54	-19.44	-	-	-	-	268	114	V
3	* 7.488	36.66	PK3	35.5	-24.6	47.56	-	-	74	-26.44	-	-	205	169	H
	* 7.49	24.39	ADR	35.5	-24.6	35.29	54	-18.71	-	-	-	-	205	169	H
4	2.048	39.87	PK3	31.2	-30.5	40.57	-	-	-	-	68.2	-27.63	142	136	V
1	2.608	40.1	PK3	32.4	-29.9	42.6	-	-	-	-	68.2	-25.6	54	172	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

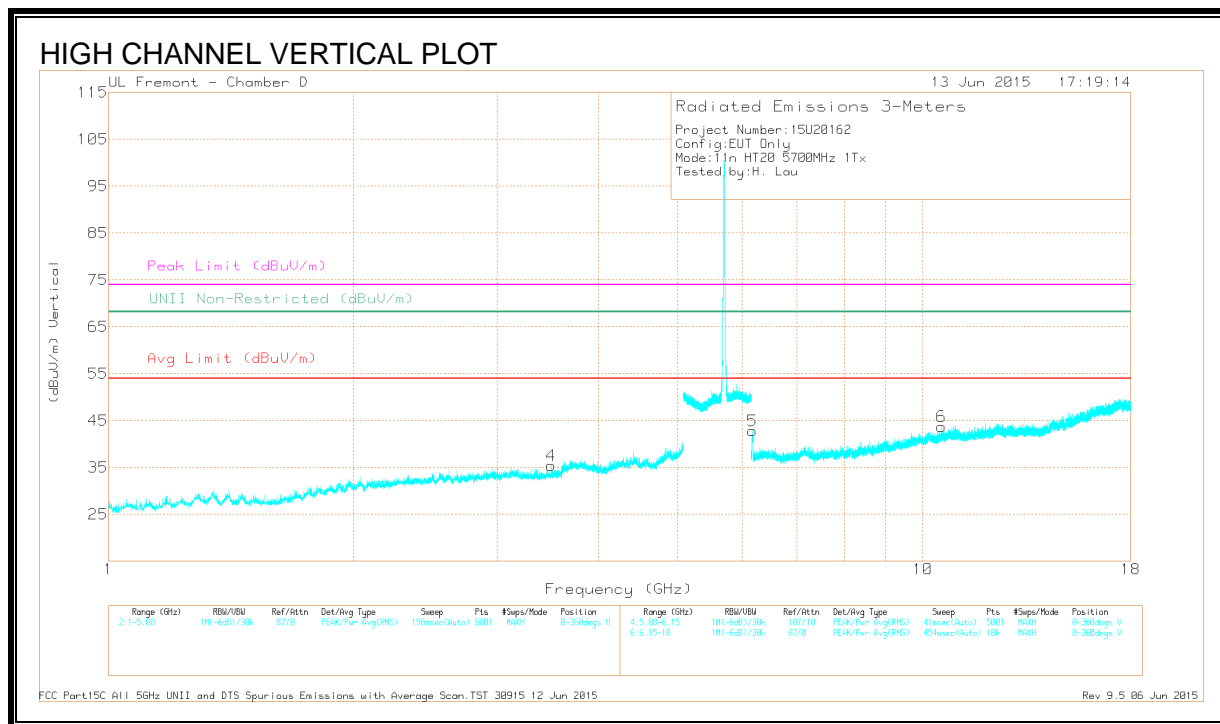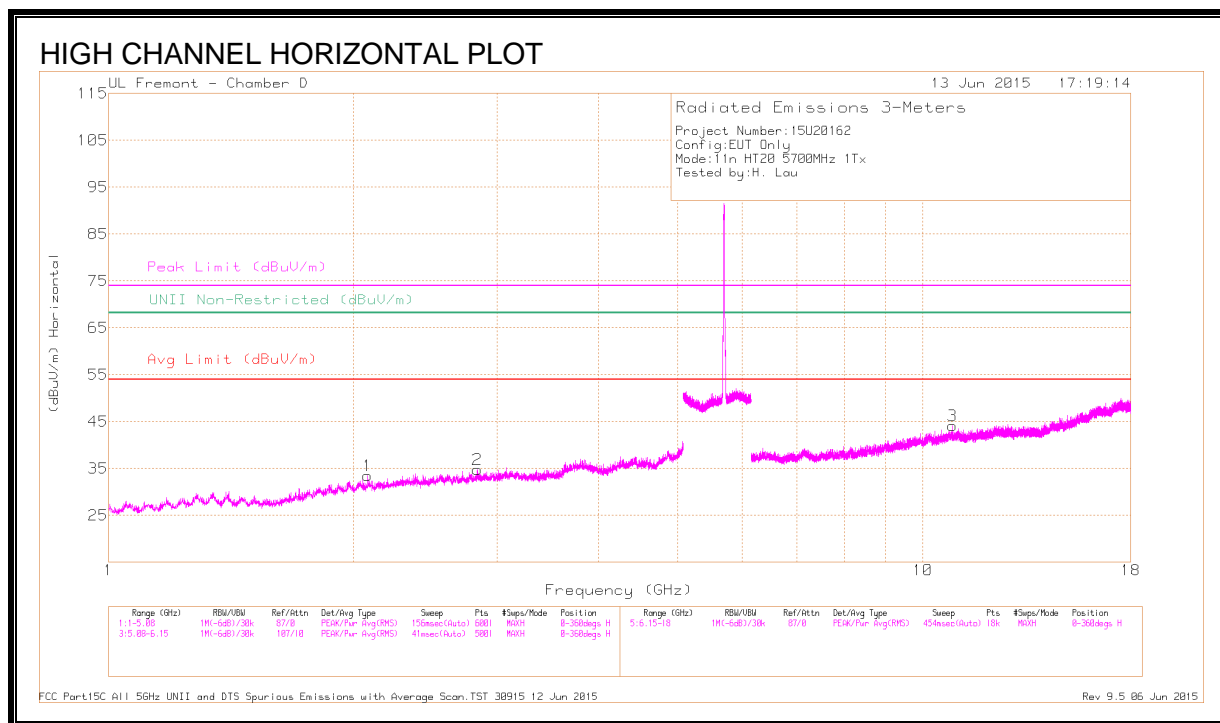

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.837	39.69	PK3	32.5	-29.4	42.79	-	-	74	-31.21	-	-	60	150	H
	* 2.836	27.58	ADR	32.5	-29.4	30.68	54	-23.32	-	-	-	-	60	150	H
3	* 10.872	34.39	PK3	38	-21.8	50.59	-	-	74	-23.41	-	-	166	215	H
	* 10.872	22.91	ADR	38	-21.8	39.11	54	-14.89	-	-	-	-	166	215	H
1	2.082	40.38	PK3	31.3	-30.6	41.08	-	-	-	-	68.2	-27.12	29	125	H
4	3.497	38.73	PK3	32.8	-28.7	42.83	-	-	-	-	68.2	-25.37	121	181	V
5	6.181	42.56	PK3	35.5	-26.5	51.56	-	-	-	-	68.2	-16.64	57	199	V
6	10.545	34.81	PK3	37.6	-21.6	50.81	-	-	-	-	68.2	-17.39	116	164	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS

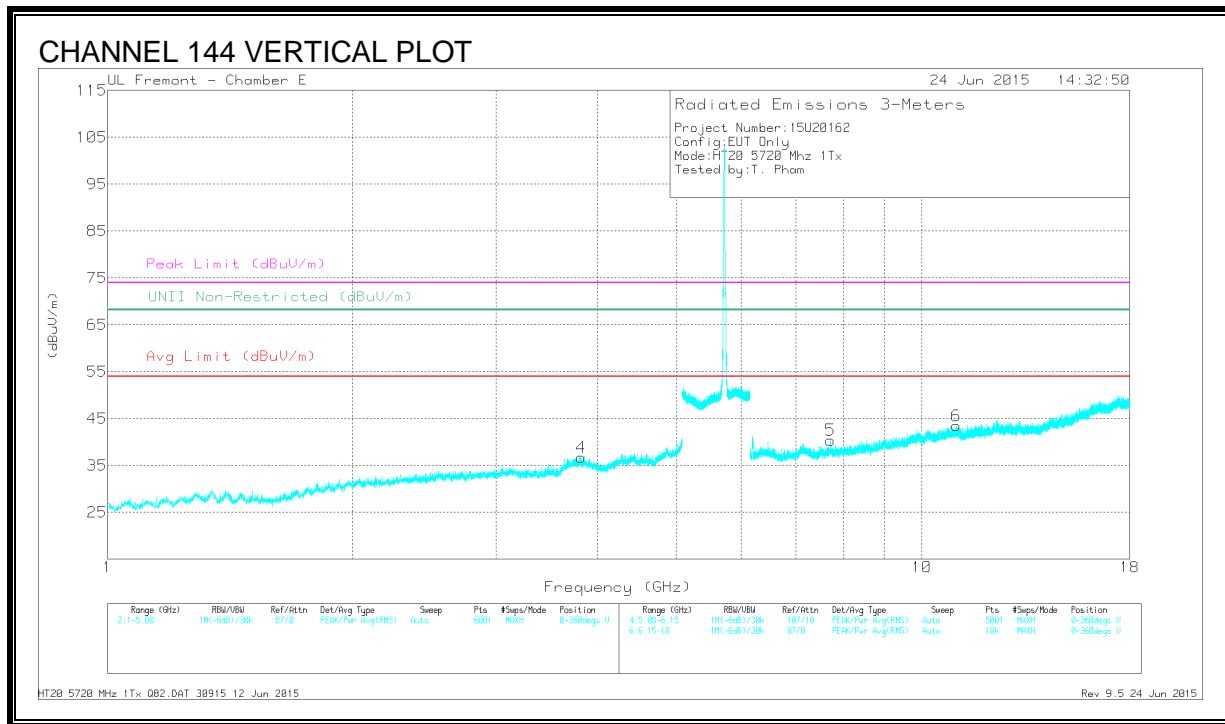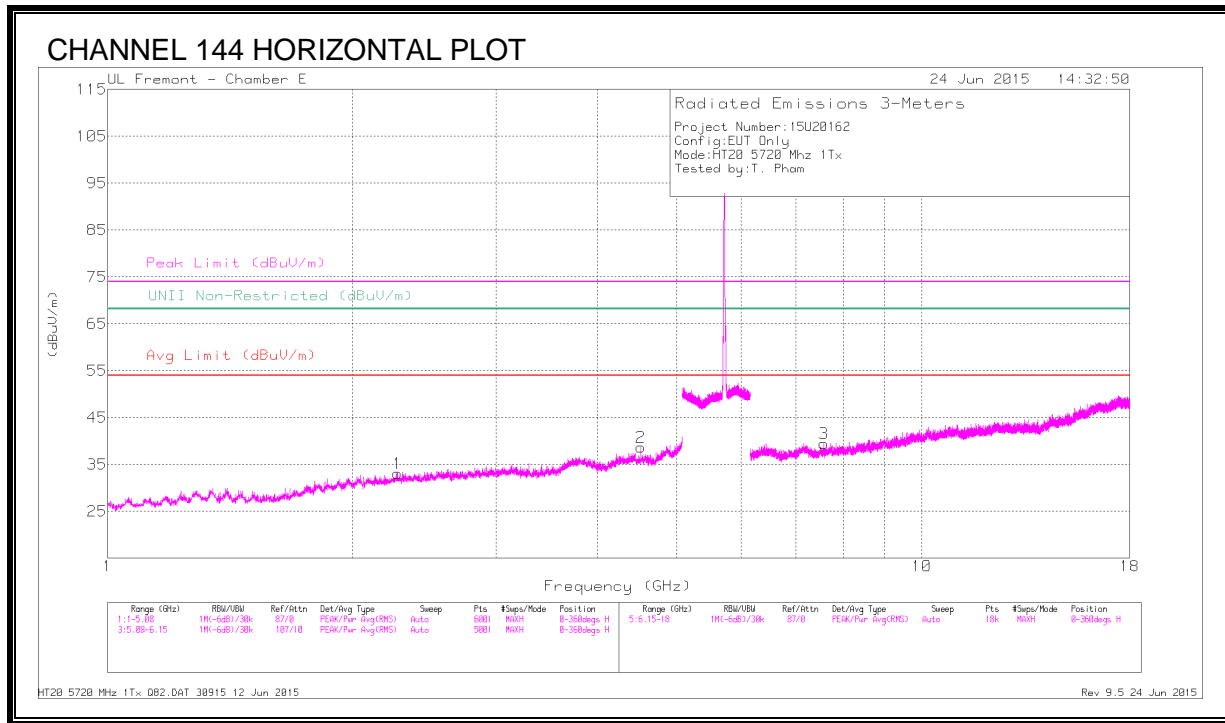

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.269	42.5	PK-U	31.9	-30.7	43.7	-	-	74	-30.3	-	-	206	205	H
	* 2.27	31.02	ADR	31.9	-30.7	32.22	54	-21.78	-	-	-	-	206	205	H
2	* 4.514	42.89	PK-U	34	-28.5	48.39	-	-	74	-25.61	-	-	107	247	H
	* 4.514	31.13	ADR	34	-28.5	36.63	54	-17.37	-	-	-	-	107	247	H
4	* 3.812	42.65	PK-U	33.4	-28.7	47.35	-	-	74	-26.65	-	-	197	291	V
	* 3.814	31.39	ADR	33.4	-28.7	36.09	54	-17.91	-	-	-	-	197	291	V
3	* 7.584	38.64	PK-U	35.6	-25.5	48.74	-	-	74	-25.26	-	-	234	144	H
	* 7.582	26.91	ADR	35.6	-25.5	37.01	54	-16.99	-	-	-	-	234	144	H
5	* 7.722	38.63	PK-U	35.6	-24.4	49.83	-	-	74	-24.17	-	-	163	196	V
	* 7.721	27.51	ADR	35.6	-24.4	38.71	54	-15.29	-	-	-	-	163	196	V
6	* 11.028	36.33	PK-U	38.1	-21.6	52.83	-	-	74	-21.17	-	-	257	142	V
	* 11.027	25.36	ADR	38.1	-21.6	41.86	54	-12.14	-	-	-	-	257	142	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

RESTRICTED BANDEDGE, CHAIN 1 (LOW CHANNEL)

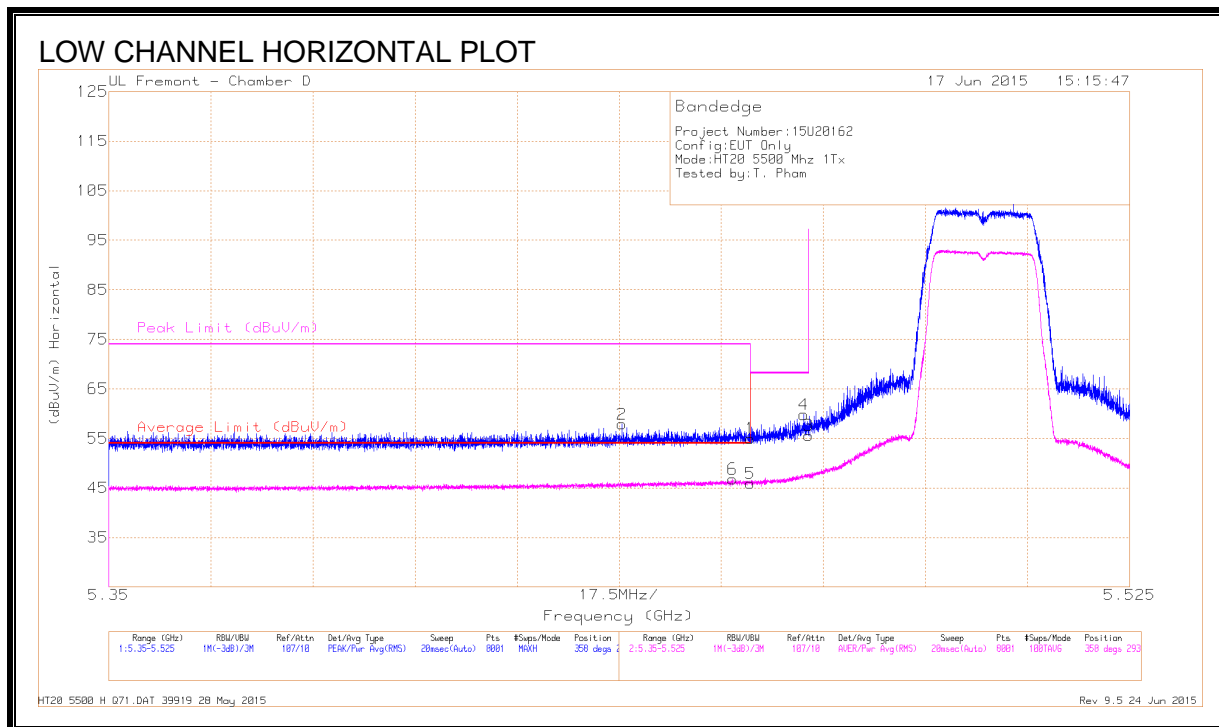


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.438	41.79	Pk	34.4	-18.3	57.89	-	-	74	-16.11	358	293	H
6	* 5.457	30.41	RMS	34.4	-18	46.81	54	-7.19	-	-	358	293	H
1	* 5.46	38.63	Pk	34.4	-18	55.03	-	-	74	-18.97	358	293	H
5	* 5.46	29.52	RMS	34.4	-18	45.92	54	-8.08	-	-	358	293	H
4	5.469	43.41	Pk	34.4	-18	59.81	-	-	68.2	-8.39	358	293	H
3	5.47	39.23	Pk	34.4	-18	55.63	-	-	68.2	-12.57	358	293	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

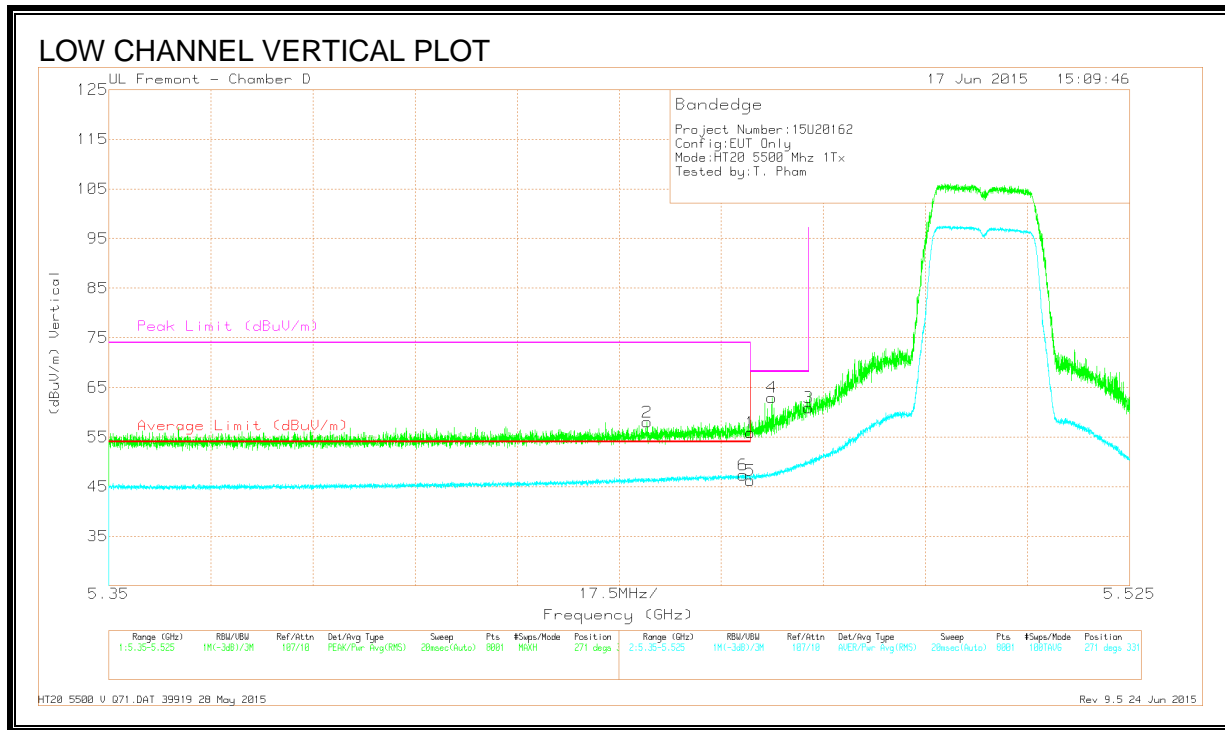

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.442	41.83	Pk	34.4	-18.2	58.03	-	-	74	-15.97	271	331	V
6	* 5.459	30.95	RMS	34.4	-18	47.35	54	-6.65	-	-	271	331	V
1	* 5.46	39.47	Pk	34.4	-18	55.87	-	-	74	-18.13	271	331	V
5	* 5.46	29.84	RMS	34.4	-18	46.24	54	-7.76	-	-	271	331	V
4	5.464	46.57	Pk	34.4	-18	62.97	-	-	68.2	-5.23	271	331	V
3	5.47	44.51	Pk	34.4	-18	60.91	-	-	68.2	-7.29	271	331	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEGE, CHAIN 1 (HIGH CHANNEL)

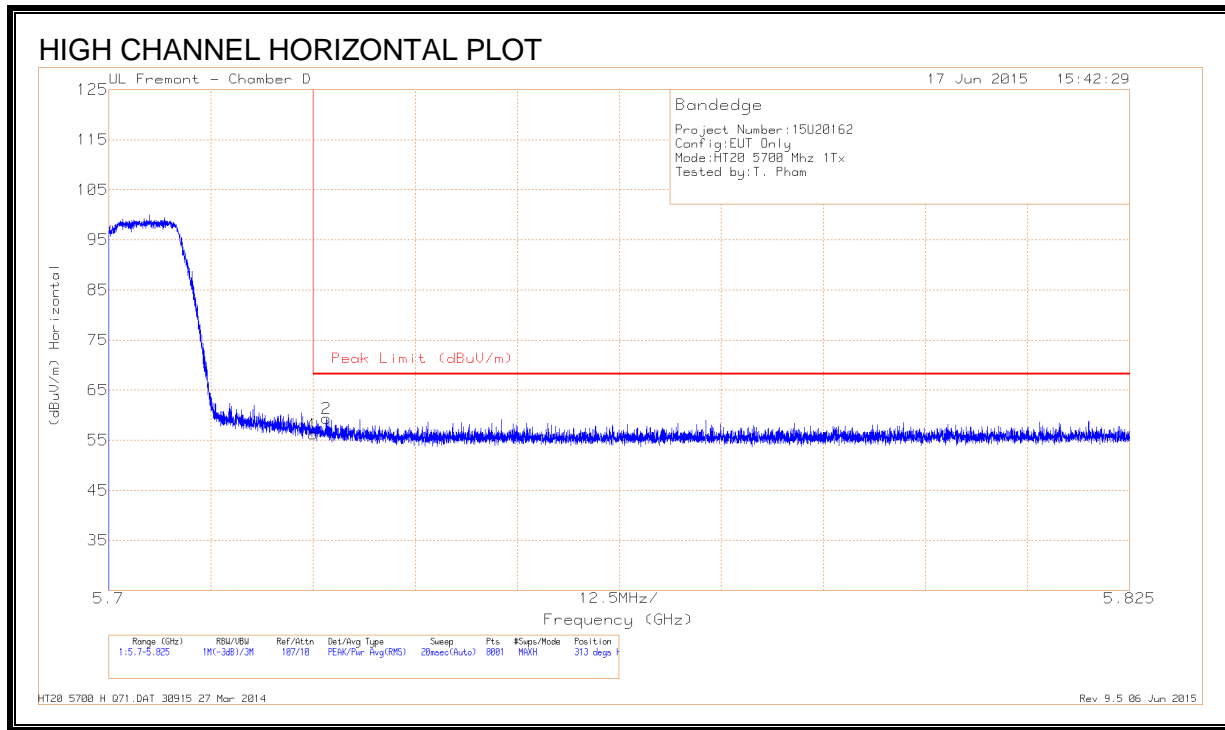


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.2	Pk	34.6	-17.6	56.2	68.2	-12	313	247	H
2	5.727	42.34	Pk	34.6	-17.6	59.34	68.2	-8.86	313	247	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

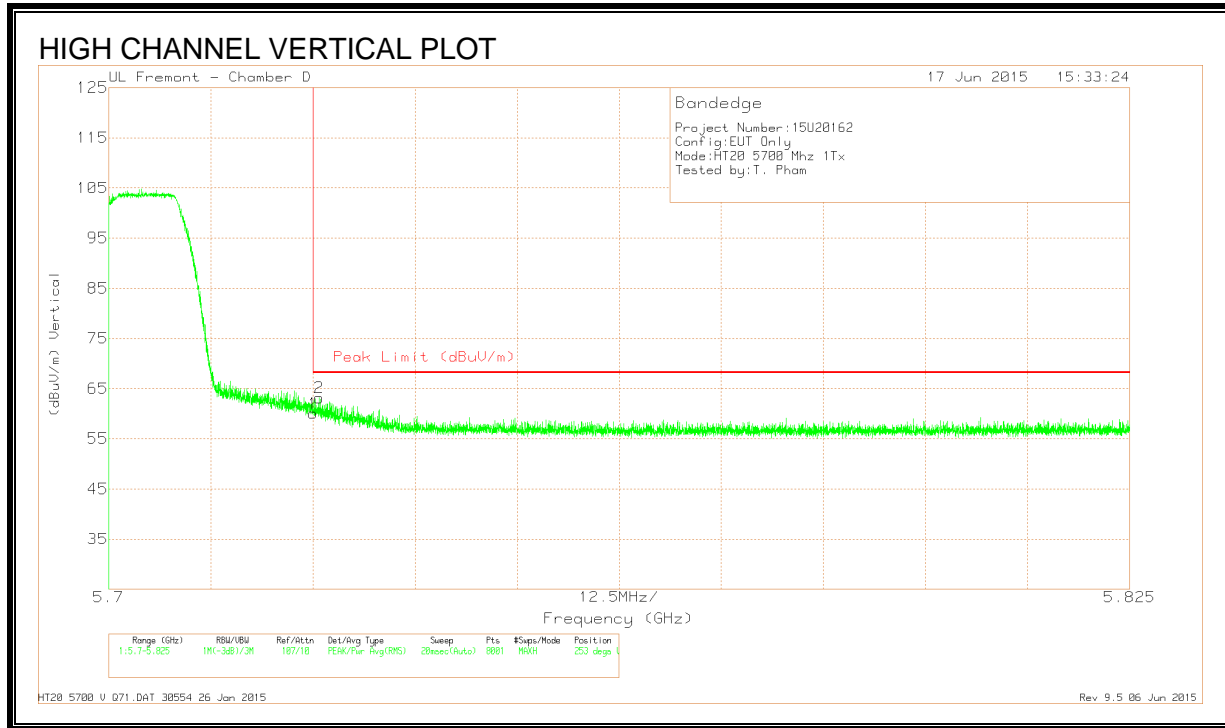



DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Flt r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.06	Pk	34.6	-17.6	60.06	68.2	-8.14	253	277	V
2	5.726	46.74	Pk	34.6	-17.6	63.74	68.2	-4.46	253	277	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

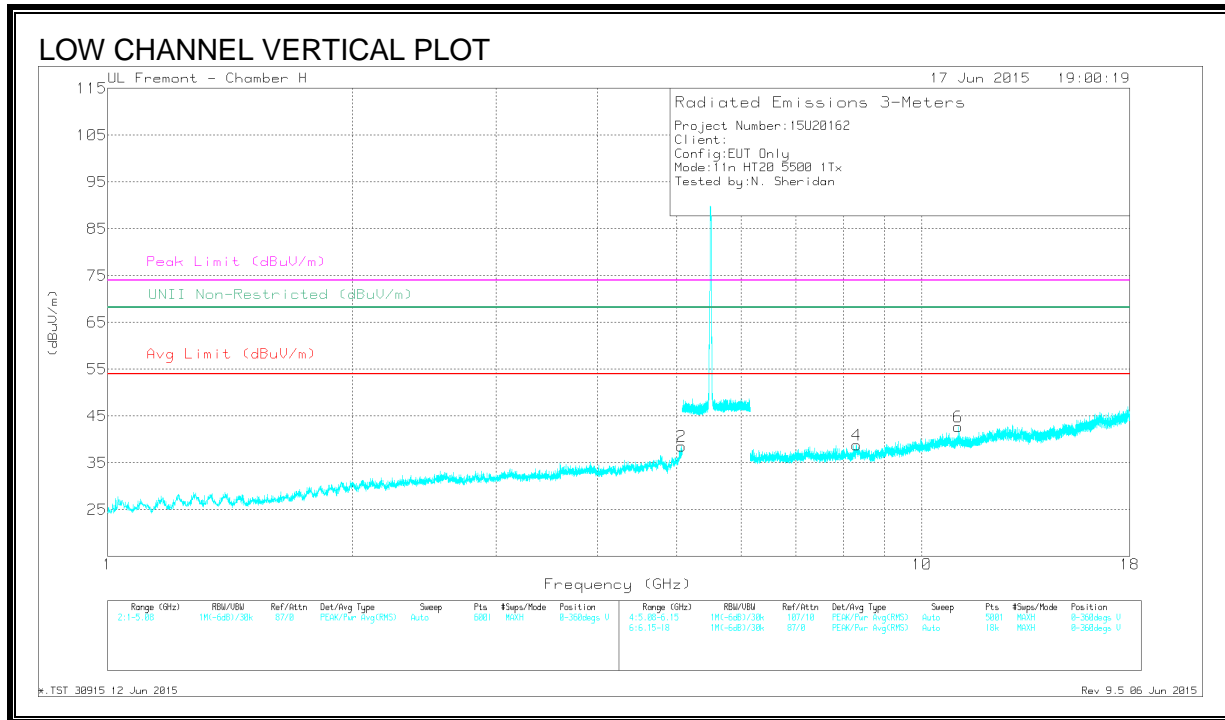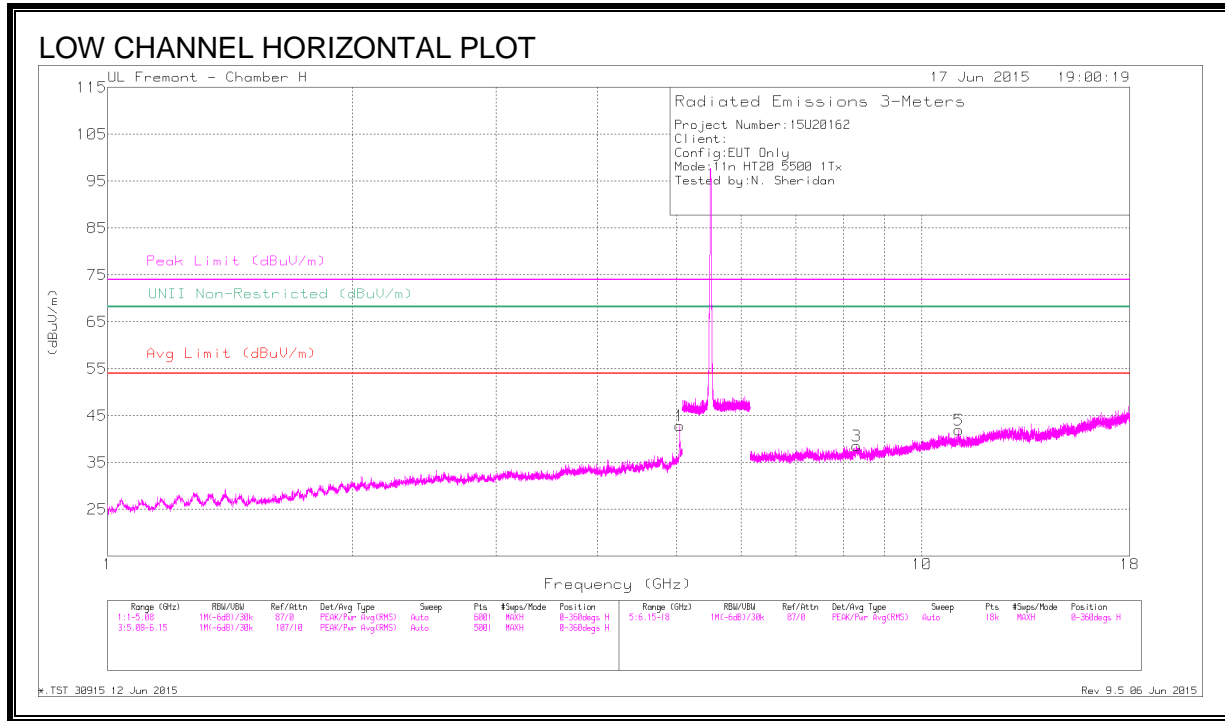

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T63 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.041	45.29	PK3	34.3	-30.3	0	49.29	-	-	74	-24.71	-	-	184	206	H
	* 5.042	37.19	ADR	34.3	-30.3	0	41.19	54	-12.81	-	-	-	-	184	206	H
2	* 5.07	40.95	PK3	34.3	-28.8	0	46.45	-	-	74	-27.55	-	-	307	297	V
	* 5.07	28.8	ADR	34.3	-28.8	0	34.3	54	-19.7	-	-	-	-	307	297	V
3	* 8.31	37.48	PK3	35.9	-27.1	0	46.28	-	-	74	-27.72	-	-	337	201	H
	* 8.307	26.61	ADR	35.9	-27.2	0	35.31	54	-18.69	-	-	-	-	337	201	H
5	* 11.104	36.46	PK3	37.7	-25.4	0	48.76	-	-	74	-25.24	-	-	167	374	H
	* 11.102	24.39	ADR	37.7	-25.3	0	36.79	54	-17.21	-	-	-	-	167	374	H
4	* 8.311	38	PK3	35.9	-27.1	0	46.8	-	-	74	-27.2	-	-	167	200	V
	* 8.314	26.7	ADR	35.9	-27.1	0	35.5	54	-18.5	-	-	-	-	167	200	V
6	* 11.08	35.96	PK3	37.7	-25	0	48.66	-	-	74	-25.34	-	-	244	221	V
	* 11.077	24.41	ADR	37.7	-25	0	37.11	54	-16.89	-	-	-	-	244	221	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

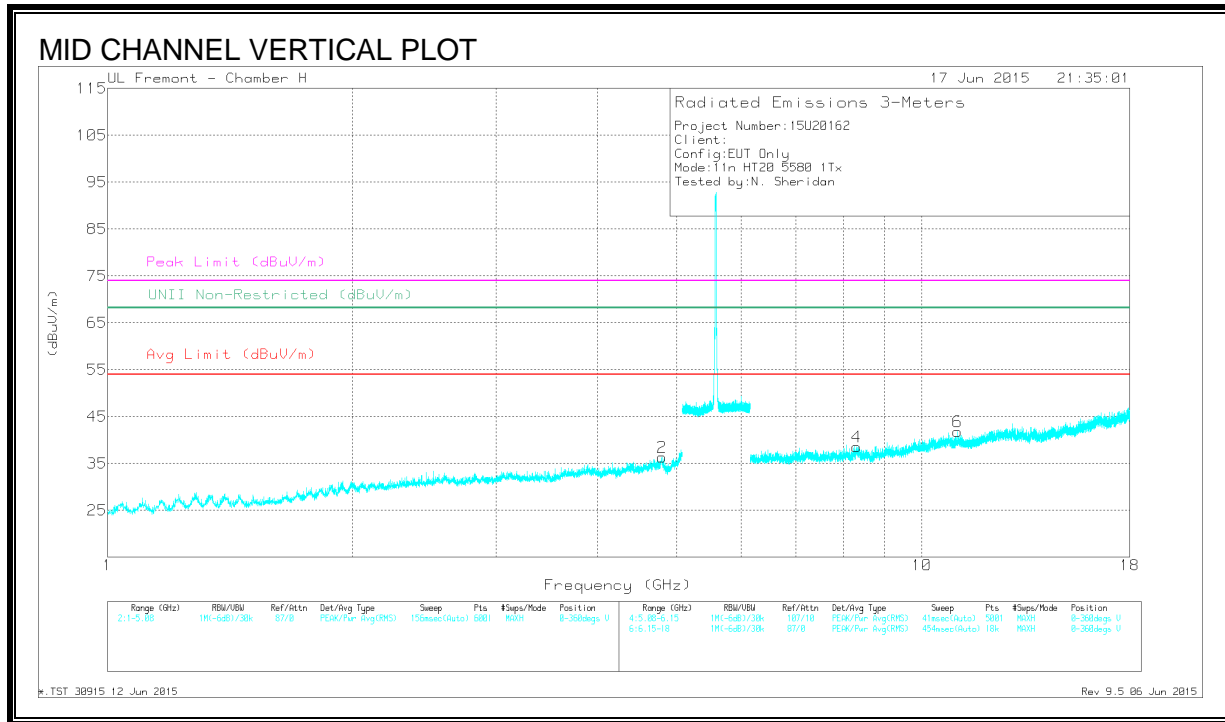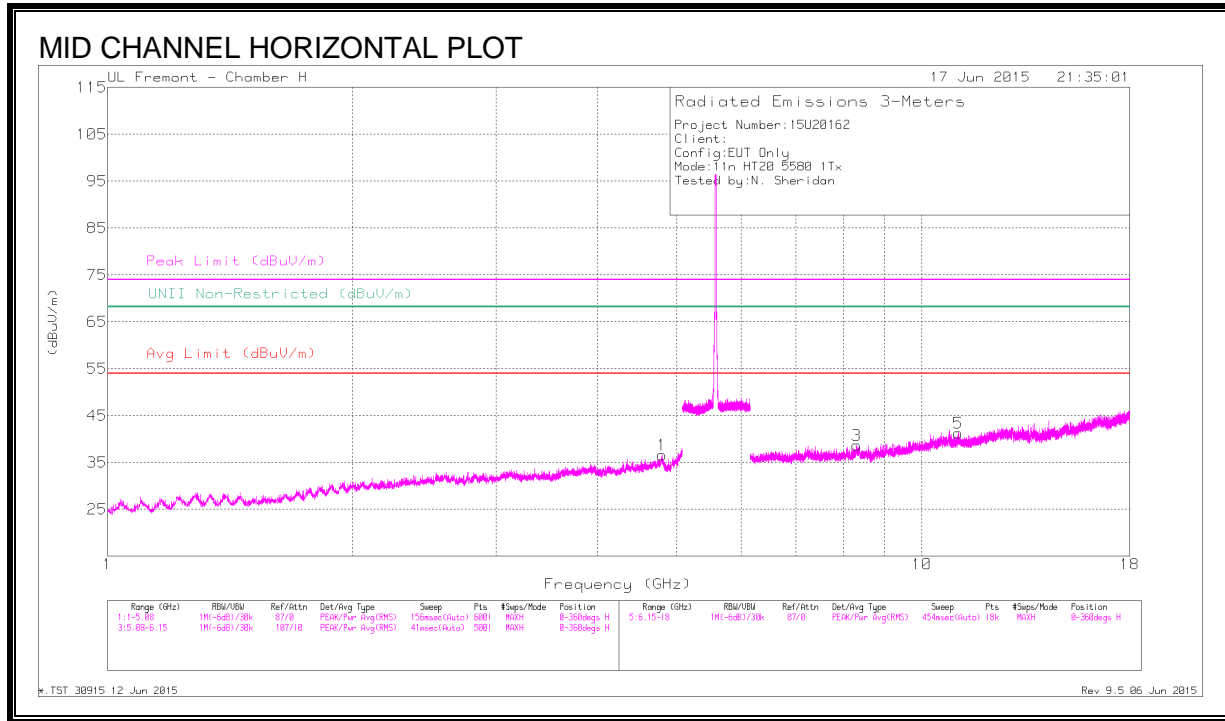

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T63 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.793	41.54	PK3	34.2	-32.1	43.64	-	-	74	-30.36	-	-	196	284	H
	* 4.793	30.25	ADR	34.2	-32.1	32.35	54	-21.65	-	-	-	-	196	284	H
2	* 4.796	42.27	PK3	34.2	-32.1	44.37	-	-	74	-29.63	-	-	196	100	V
	* 4.796	30.63	ADR	34.2	-32.1	32.73	54	-21.27	-	-	-	-	196	100	V
3	* 8.313	38.08	PK3	35.9	-27.1	46.88	-	-	74	-27.12	-	-	196	108	H
	* 8.312	26.61	ADR	35.9	-27.1	35.41	54	-18.59	-	-	-	-	196	108	H
5	* 11.084	36.54	PK3	37.7	-24.9	49.34	-	-	74	-24.66	-	-	207	185	H
	* 11.082	24.31	ADR	37.7	-24.9	37.11	54	-16.89	-	-	-	-	207	185	H
4	* 8.314	38.13	PK3	35.9	-27.1	46.93	-	-	74	-27.07	-	-	207	201	V
	* 8.312	26.72	ADR	35.9	-27.1	35.52	54	-18.48	-	-	-	-	207	201	V
6	* 11.057	35.65	PK3	37.8	-25.4	48.05	-	-	74	-25.95	-	-	183	318	V
	* 11.059	24.21	ADR	37.8	-25.3	36.71	54	-17.29	-	-	-	-	183	318	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

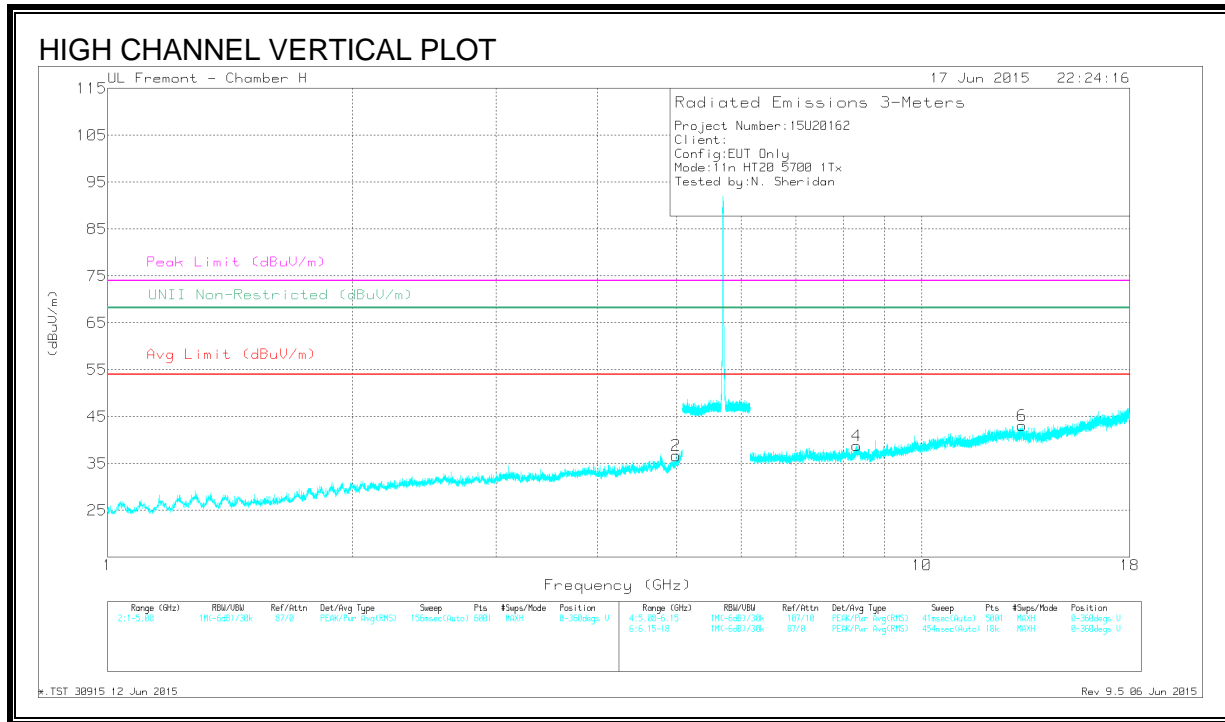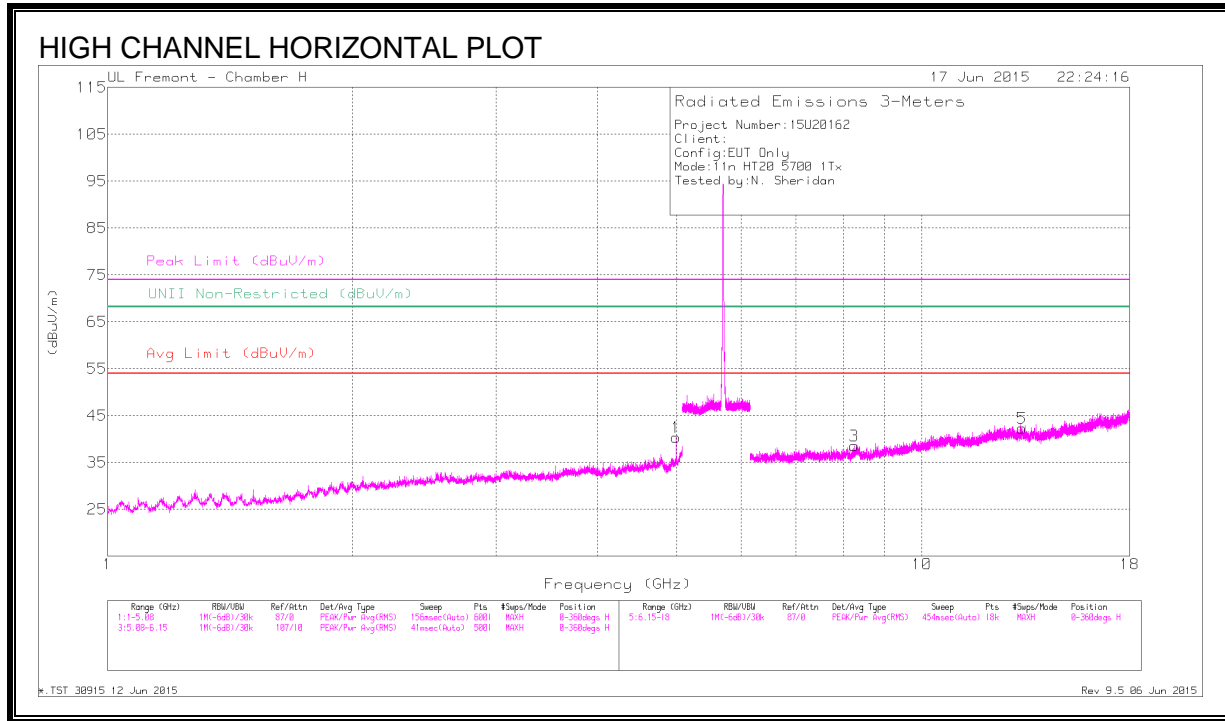

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T63 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.987	43.96	PK3	34.3	-31.1	47.16	-	-	74	-26.84	-	-	136	167	H
	* 4.988	36.06	ADR	34.3	-31.1	39.26	54	-14.74	-	-	-	-	136	167	H
2	* 4.988	41.79	PK3	34.3	-31.2	44.89	-	-	74	-29.11	-	-	67	223	V
	* 4.988	31.56	ADR	34.3	-31.1	34.76	54	-19.24	-	-	-	-	67	223	V
3	* 8.255	38.51	PK3	35.9	-28.5	45.91	-	-	74	-28.09	-	-	67	100	H
	* 8.255	27.2	ADR	35.9	-28.5	34.6	54	-19.4	-	-	-	-	67	100	H
5	* 13.271	36.47	PK3	39.4	-25.2	50.67	-	-	74	-23.33	-	-	229	143	H
	* 13.27	24.48	ADR	39.4	-25.2	38.68	54	-15.32	-	-	-	-	229	143	H
4	* 8.323	37.83	PK3	35.9	-27.4	46.33	-	-	74	-27.67	-	-	229	201	V
	* 8.32	26.69	ADR	35.9	-27.3	35.29	54	-18.71	-	-	-	-	229	201	V
6	* 13.28	36.34	PK3	39.4	-25.2	50.54	-	-	74	-23.46	-	-	281	214	V
	* 13.28	24.57	ADR	39.4	-25.2	38.77	54	-15.23	-	-	-	-	281	214	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS

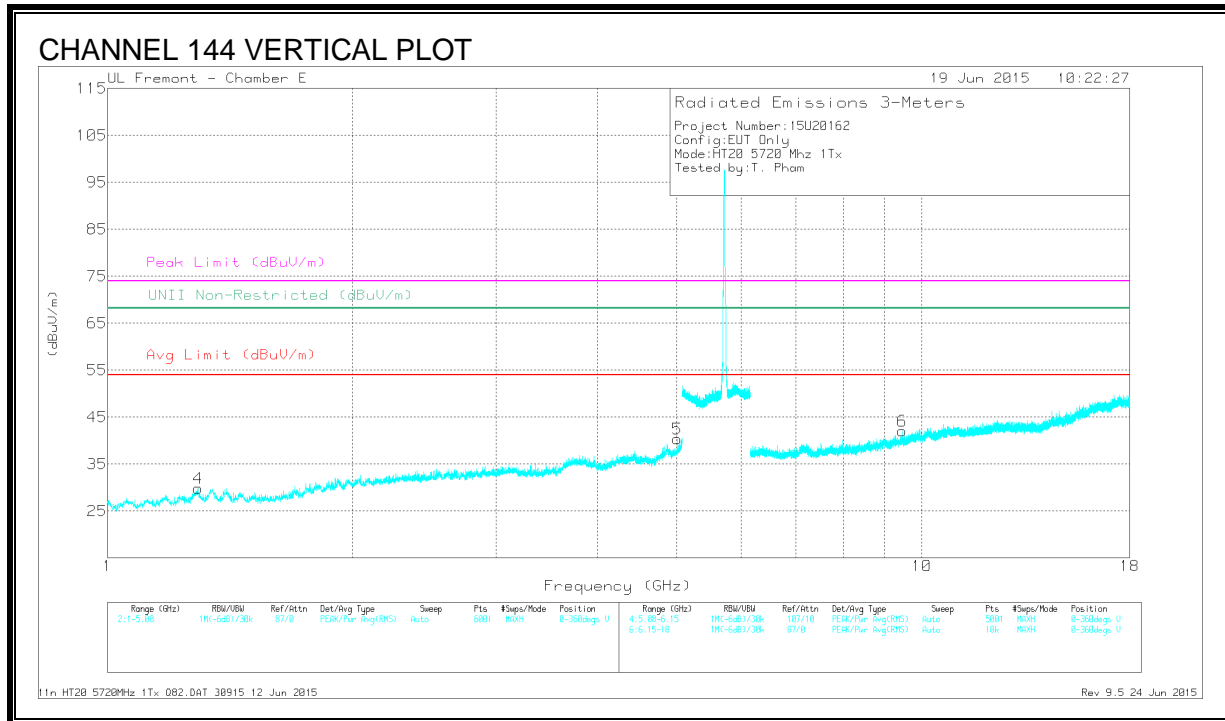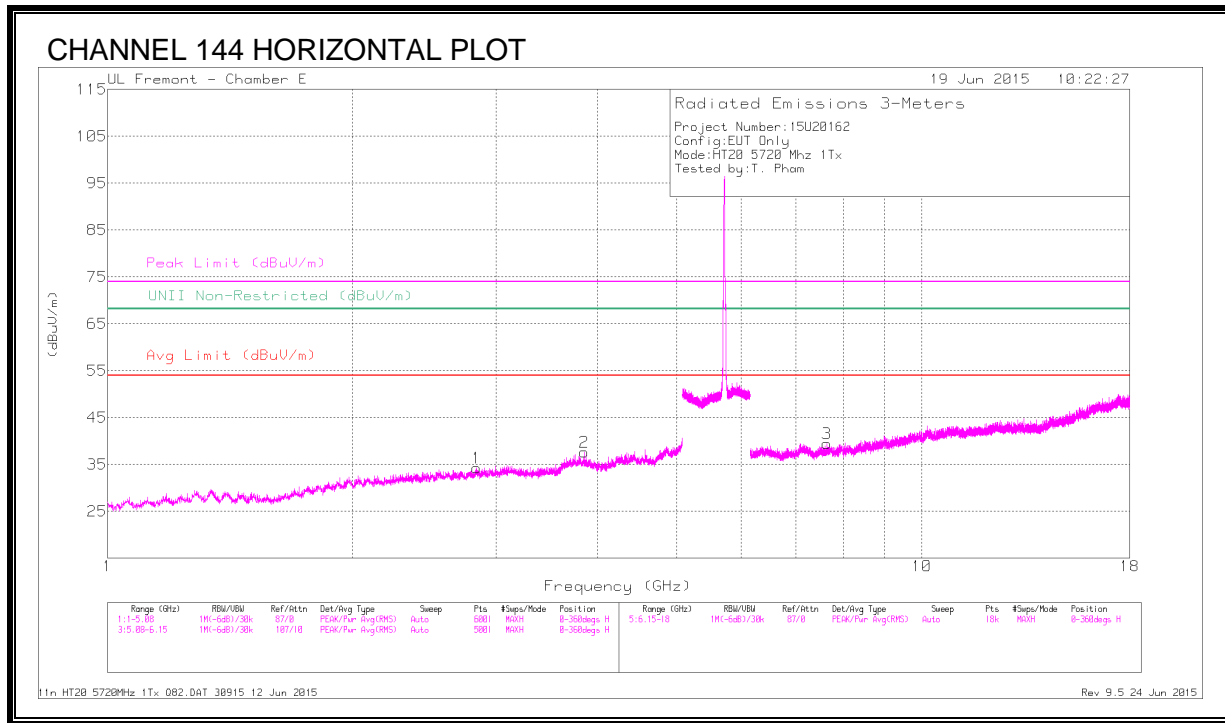

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.839	42.32	PK-U	32.5	-29.3	45.52	-	-	74	-28.48	-	-	246	180	H
	* 2.839	30.28	ADR	32.5	-29.3	33.48	54	-20.52	-	-	-	-	246	180	H
2	* 3.849	42.62	PK-U	33.4	-28.9	47.12	-	-	74	-26.88	-	-	352	201	H
	* 3.848	31.13	ADR	33.4	-28.9	35.63	54	-18.37	-	-	-	-	352	201	H
4	* 1.293	44.1	PK-U	28.9	-31.9	41.1	-	-	74	-32.9	-	-	51	172	V
	* 1.292	32.59	ADR	28.9	-31.9	29.59	54	-24.41	-	-	-	-	51	172	V
5	* 5.003	42.32	PK-U	34.3	-26.7	49.92	-	-	74	-24.08	-	-	148	153	V
	* 5.006	31.08	ADR	34.3	-26.7	38.68	54	-15.32	-	-	-	-	148	153	V
3	* 7.645	38.45	PK-U	35.6	-25.7	48.35	-	-	74	-25.65	-	-	230	250	H
	* 7.642	27.39	ADR	35.6	-25.7	37.29	54	-16.71	-	-	-	-	230	250	H
6	* 9.456	37.58	PK-U	36.5	-21.5	52.58	-	-	74	-21.42	-	-	271	188	V
	* 9.457	26.47	ADR	36.5	-21.5	41.47	54	-12.53	-	-	-	-	271	188	V


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.15. 802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

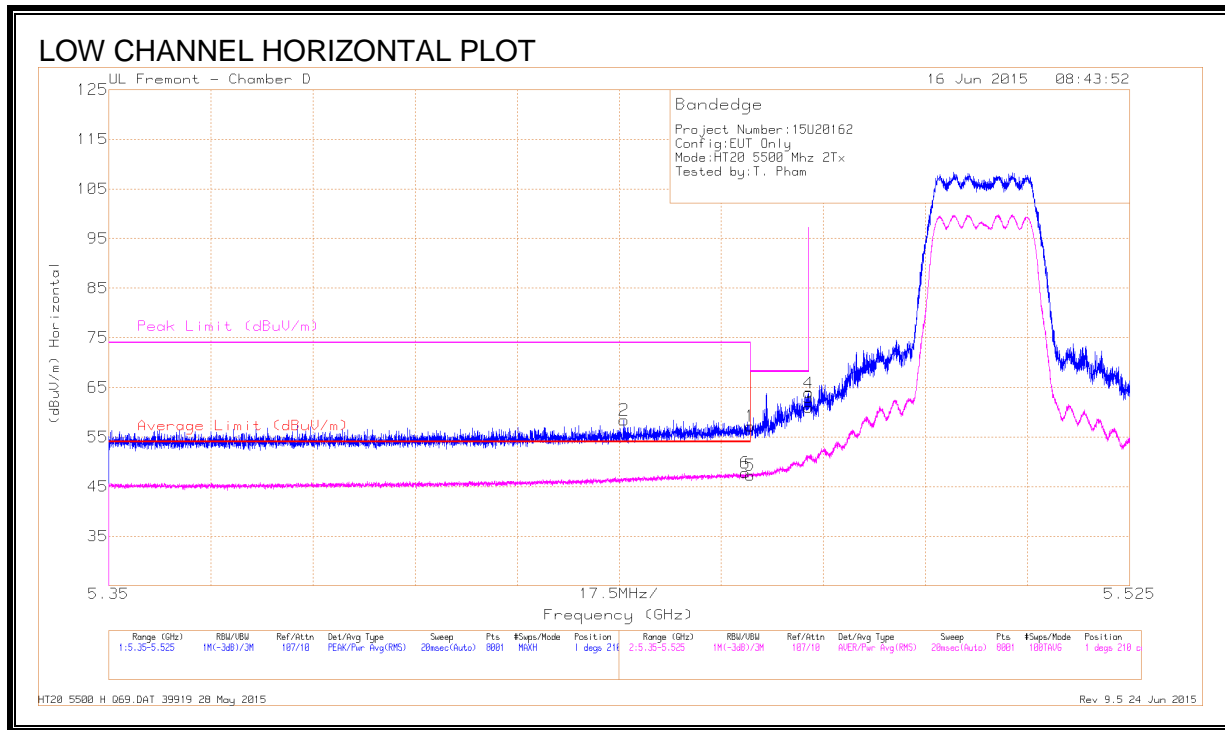


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.438	42.31	Pk	34.4	-18.3	58.41	-	-	74	-15.59	1	210	H
6	* 5.459	31.4	RMS	34.4	-18	47.8	54	-6.2	-	-	1	210	H
1	* 5.46	40.8	Pk	34.4	-18	57.2	-	-	74	-16.8	1	210	H
5	* 5.46	30.92	RMS	34.4	-18	47.32	54	-6.68	-	-	1	210	H
3	5.47	44.58	Pk	34.4	-18	60.98	-	-	68.2	-7.22	1	210	H
4	5.47	47.5	Pk	34.4	-18	63.9	-	-	68.2	-4.3	1	210	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

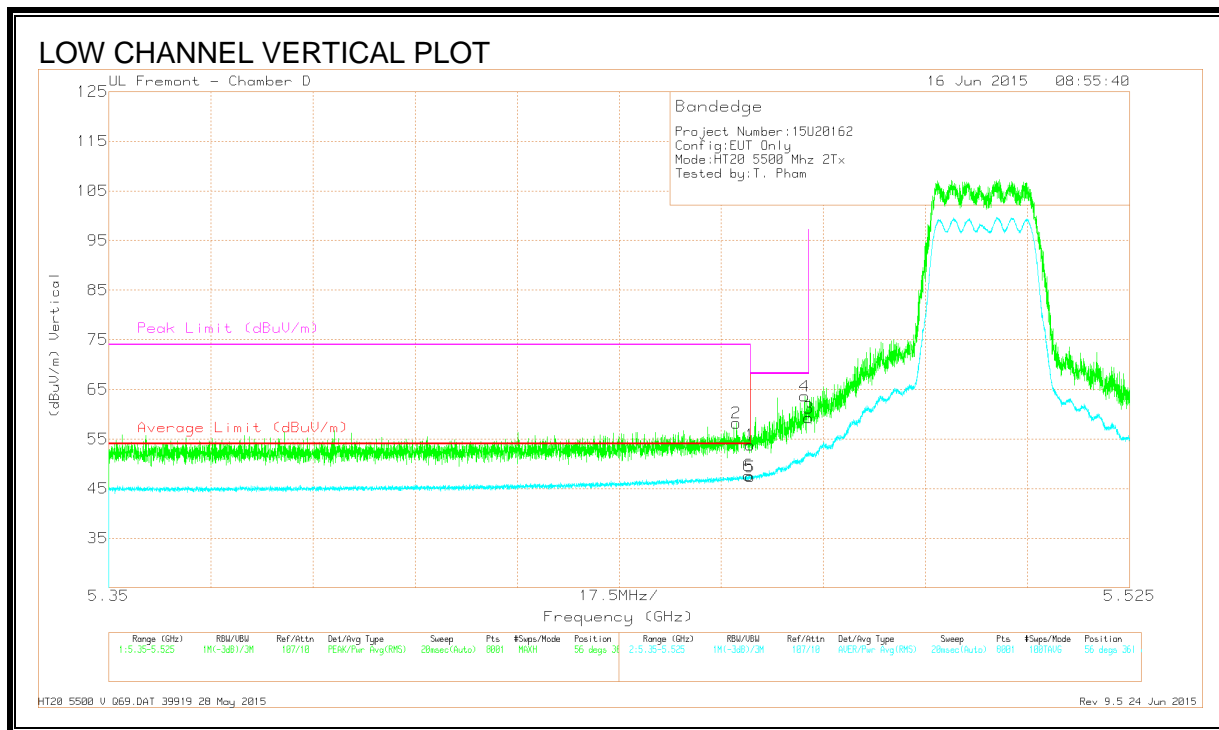

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.458	41.82	Pk	34.4	-18	58.22	-	-	74	-15.78	56	361	V
1	* 5.46	37.39	Pk	34.4	-18	53.79	-	-	74	-20.21	56	361	V
5	* 5.46	30.99	RMS	34.4	-18	47.39	54	-6.61	-	-	56	361	V
6	* 5.46	31.27	RMS	34.4	-18	47.67	54	-6.33	-	-	56	361	V
4	5.469	47.21	Pk	34.4	-18	63.61	-	-	68.2	-4.59	56	361	V
3	5.47	42.87	Pk	34.4	-18	59.27	-	-	68.2	-8.93	56	361	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEDGE (HIGH CHANNEL)

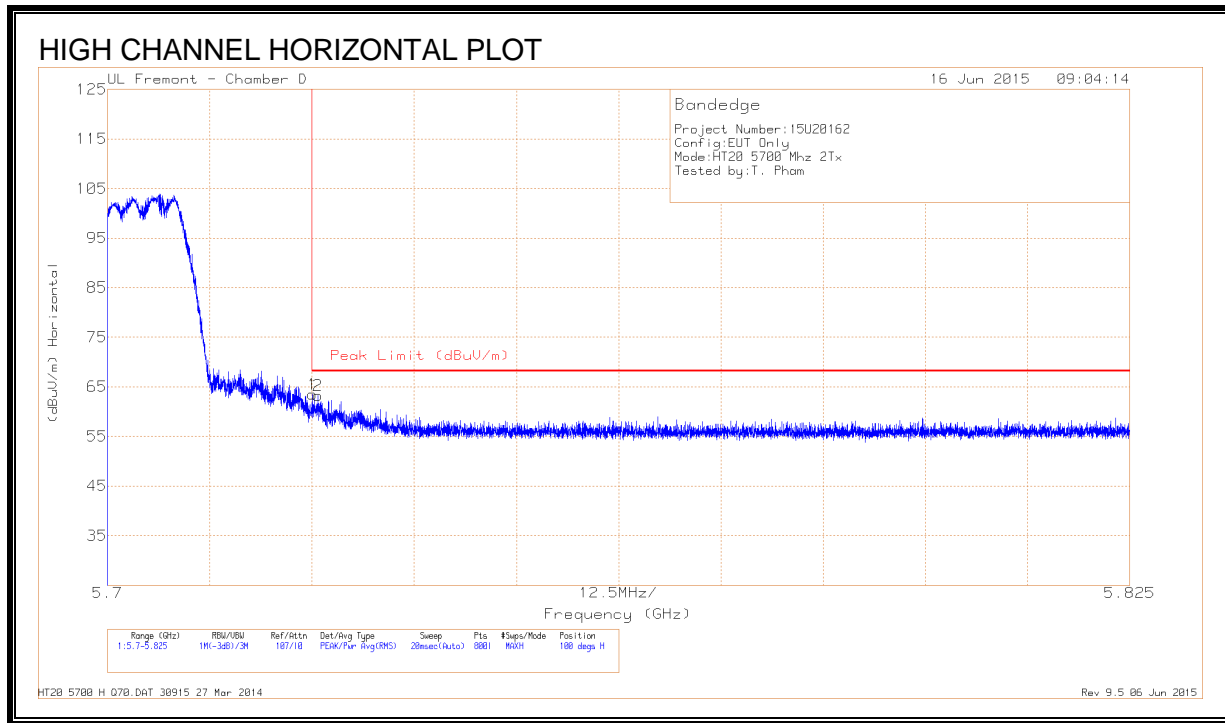


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.45	Pk	34.6	-17.6	63.45	68.2	-4.75	100	326	H
2	5.726	46.27	Pk	34.6	-17.6	63.27	68.2	-4.93	100	326	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

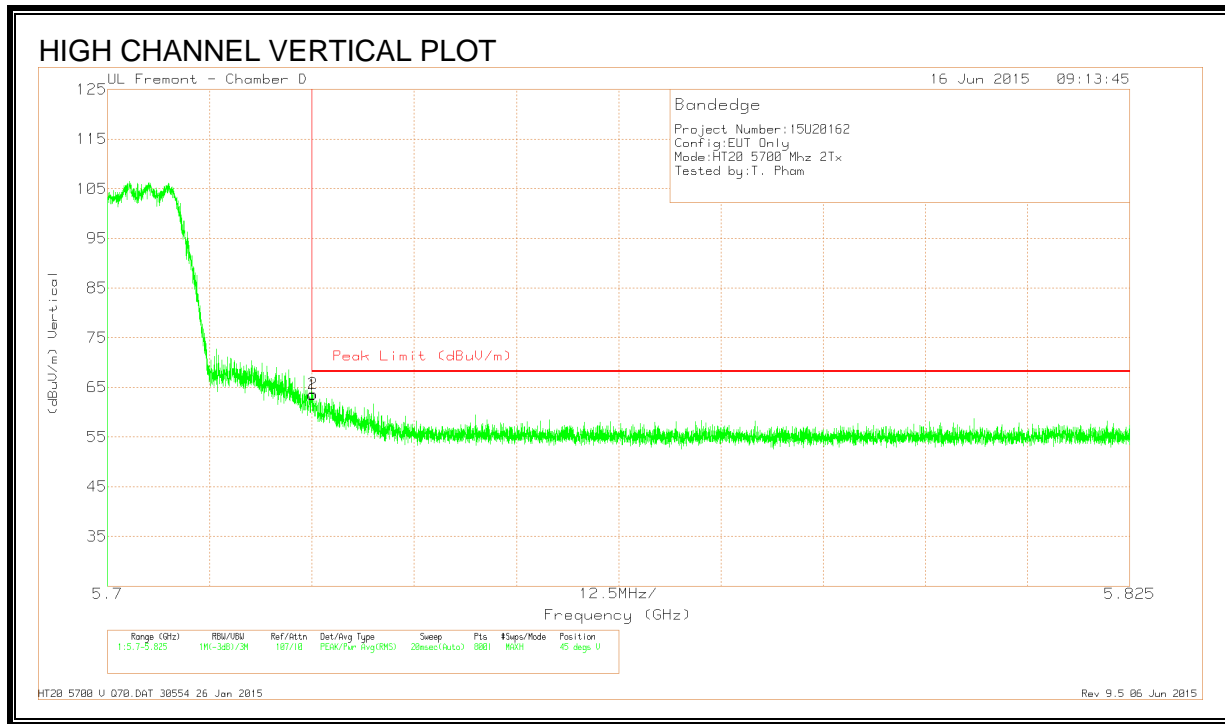



DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.45	Pk	34.6	-17.6	63.45	68.2	-4.75	45	225	V
2	5.725	46.69	Pk	34.6	-17.6	63.69	68.2	-4.51	45	225	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

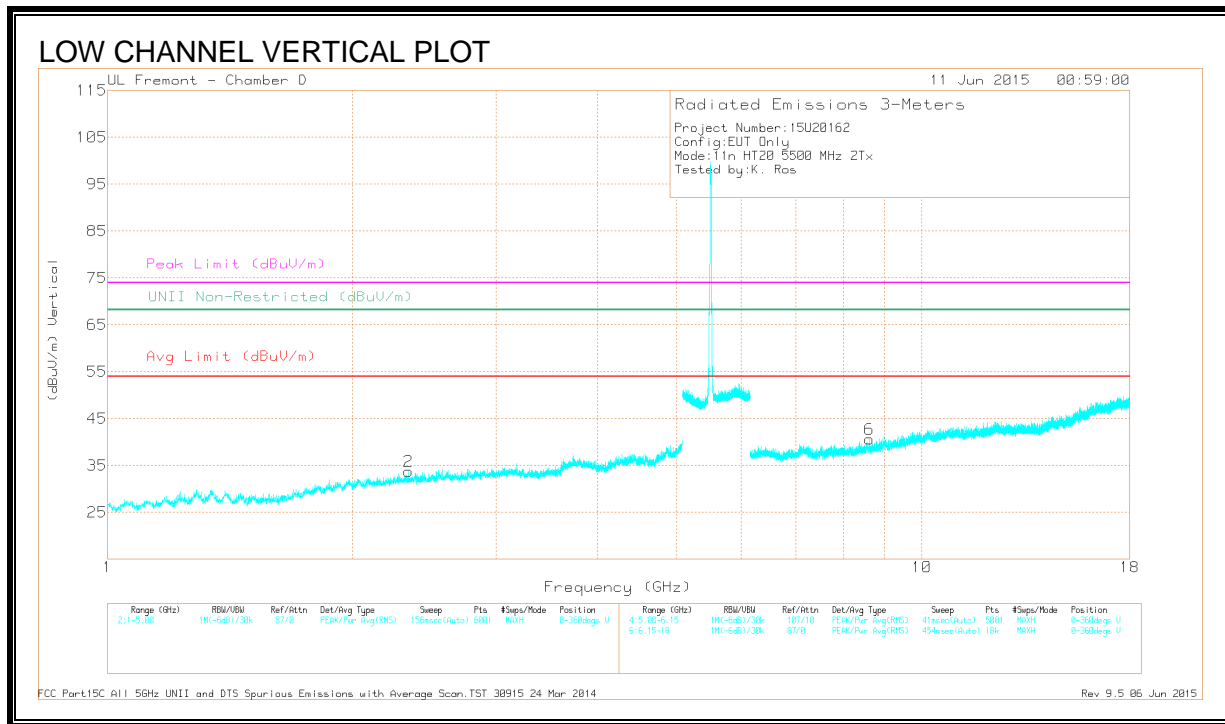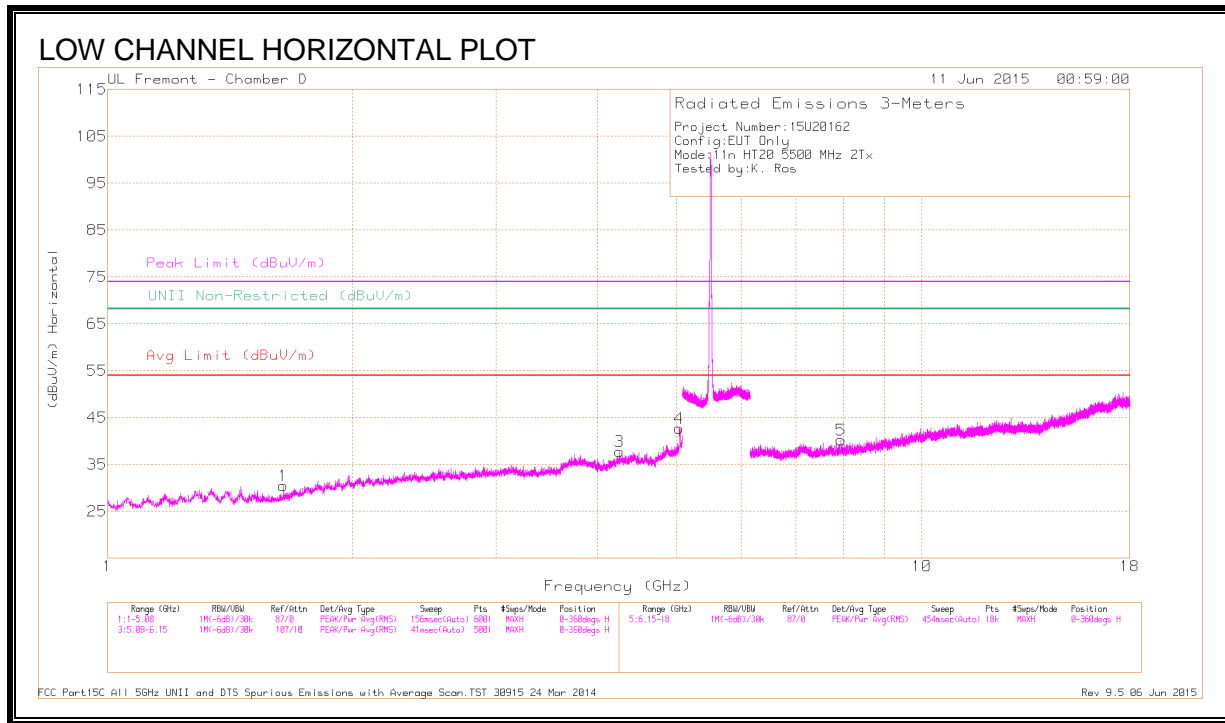

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.251	37.83	PK3	33.5	-27.7	43.63	-	-	74	-30.37	-	-	65	117	H
	* 4.25	26.02	ADR	33.5	-27.7	31.82	54	-22.18	-	-	-	-	65	117	H
4	* 5.036	41.93	PK3	34.3	-25.6	50.63	-	-	74	-23.37	-	-	354	291	H
	* 5.036	30.85	ADR	34.3	-25.6	39.55	54	-14.45	-	-	-	-	354	291	H
2	* 2.341	39.62	PK3	32	-30.5	41.12	-	-	74	-32.88	-	-	336	189	V
	* 2.343	28.04	ADR	32	-30.5	29.54	54	-24.46	-	-	-	-	336	189	V
1	1.642	40.18	PK3	28.3	-31.5	36.98	-	-	74	-37.02	68.2	-31.22	180	110	H
5	7.959	36.26	PK3	35.7	-23.9	48.06	-	-	74	-25.94	68.2	-20.14	311	119	H
6	8.62	34.37	PK3	35.8	-22.7	47.47	-	-	74	-26.53	68.2	-20.73	322	130	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

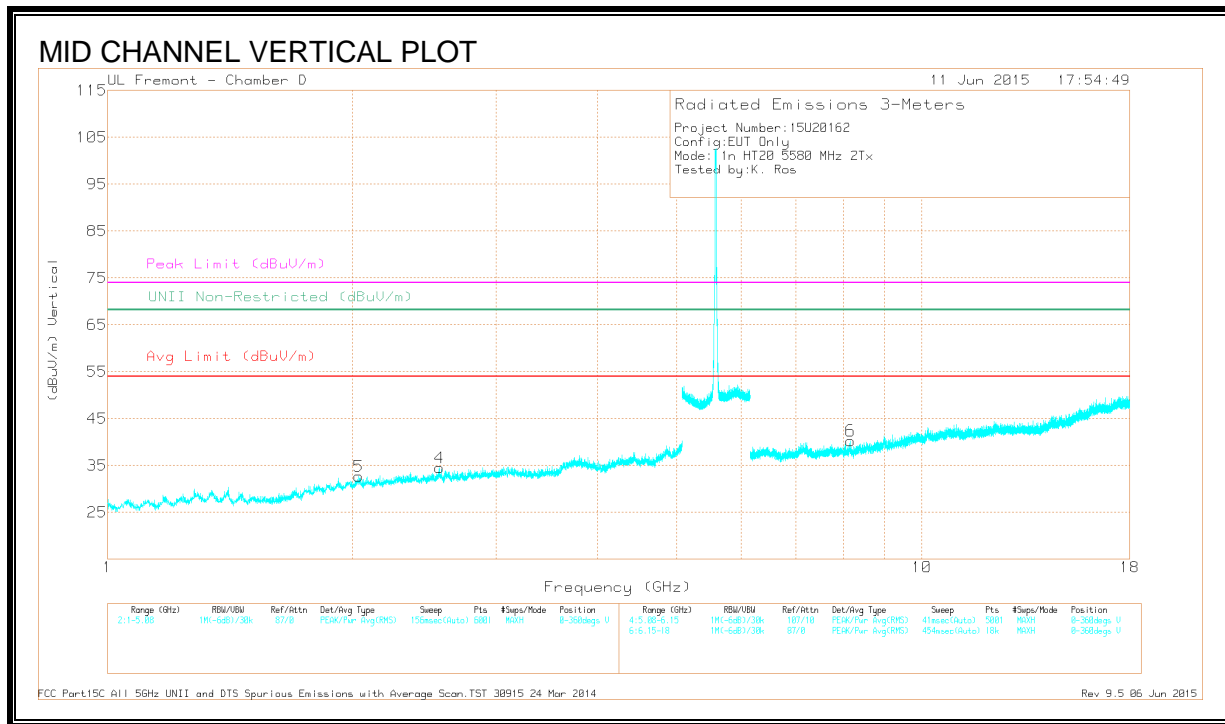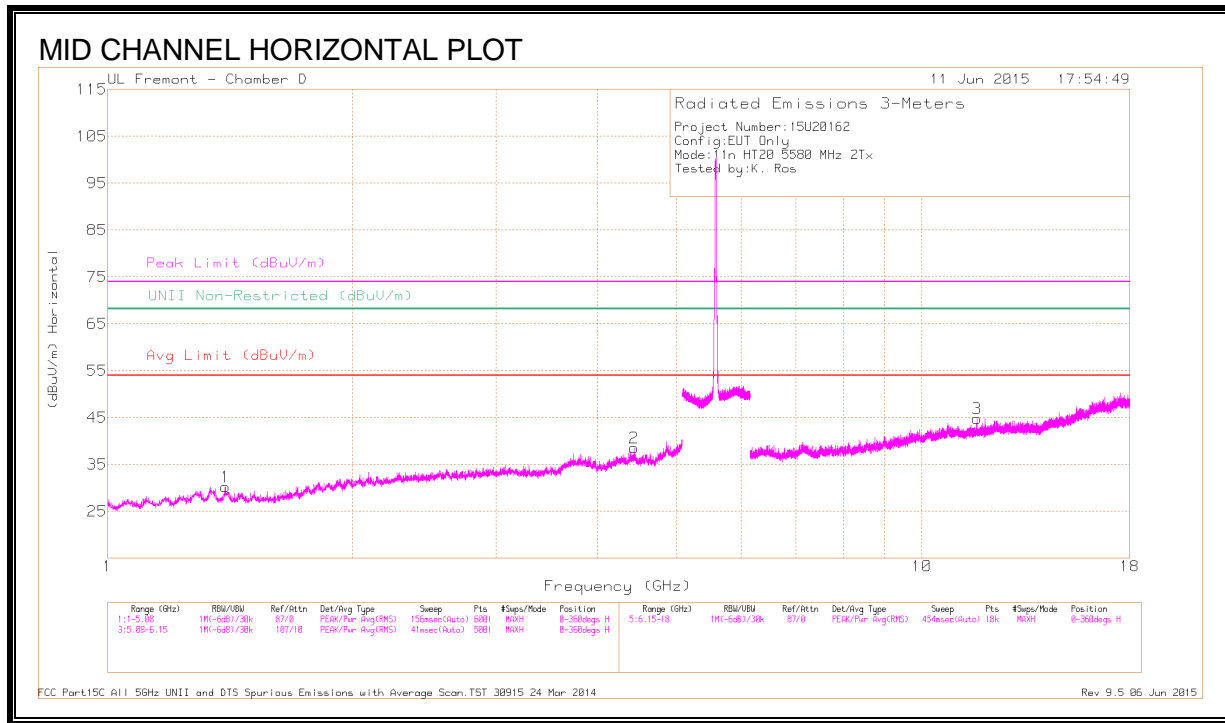

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.396	40.54	PK3	28.6	-31.4	37.74	-	-	74	-36.26	-	-	70	227	H
	* 1.397	28.88	ADR	28.6	-31.4	26.08	54	-27.92	-	-	-	-	70	227	H
3	* 11.687	34.33	PK3	38.2	-21.3	51.23	-	-	74	-22.77	-	-	80	266	H
	* 11.687	22.86	ADR	38.2	-21.3	39.76	54	-14.24	-	-	-	-	80	266	H
6	* 8.172	35.79	PK3	35.7	-24.4	47.09	-	-	74	-26.91	-	-	55	213	V
	* 8.172	24.5	ADR	35.7	-24.4	35.8	54	-18.2	-	-	-	-	55	213	V
5	2.036	41.08	PK3	31.2	-30.5	41.78	-	-	74	-32.22	68.2	-26.42	61	278	V
4	2.554	39.96	PK3	32.3	-29.8	42.46	-	-	74	-31.54	68.2	-25.74	105	314	V
2	4.433	37.79	PK3	33.9	-27.5	44.19	-	-	74	-29.81	68.2	-24.01	272	174	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

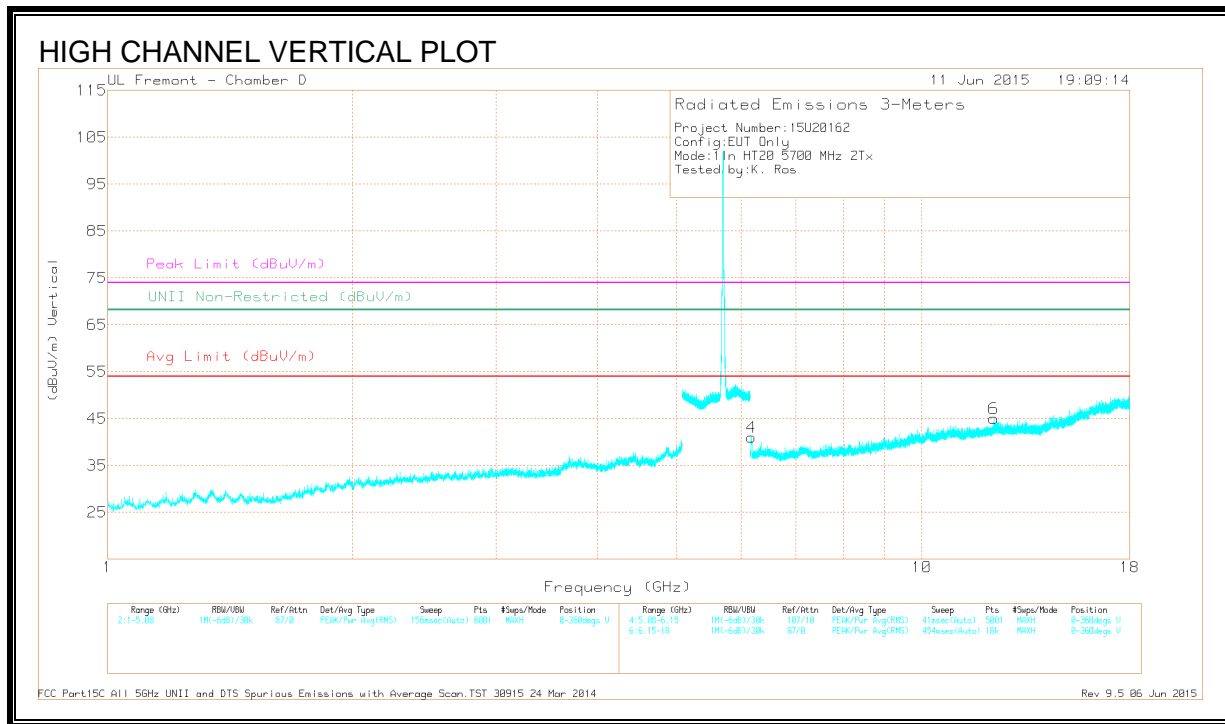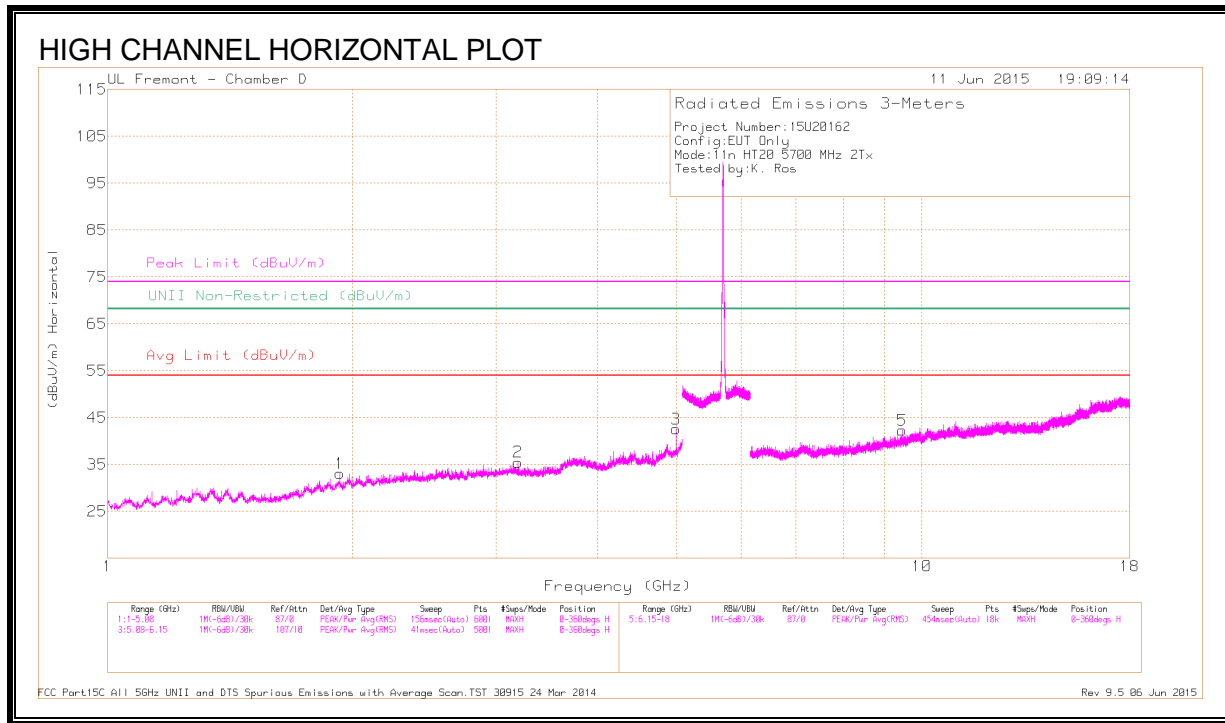

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.988	40.79	PK3	34.2	-26.9	48.09	-	-	74	-25.91	-	-	195	117	H
	* 4.987	32.4	ADR	34.2	-26.9	39.7	54	-14.3	-	-	-	-	195	117	H
5	* 9.456	34.48	PK3	36.5	-21.5	49.48	-	-	74	-24.52	-	-	221	117	H
	* 9.453	22.93	ADR	36.5	-21.6	37.83	54	-16.17	-	-	-	-	221	117	H
6	* 12.254	35.05	PK3	38.9	-21.8	52.15	-	-	74	-21.85	-	-	299	188	V
	* 12.253	23.64	ADR	38.9	-21.8	40.74	54	-13.26	-	-	-	-	299	188	V
1	1.927	40.45	PK3	30.8	-31.1	40.15	-	-	74	-33.85	68.2	-28.05	190	119	H
2	3.193	39.01	PK3	32.7	-29.2	42.51	-	-	74	-31.49	68.2	-25.69	11	146	H
4	6.177	42.49	PK3	35.5	-26.4	51.59	-	-	74	-22.41	68.2	-16.61	249	168	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS

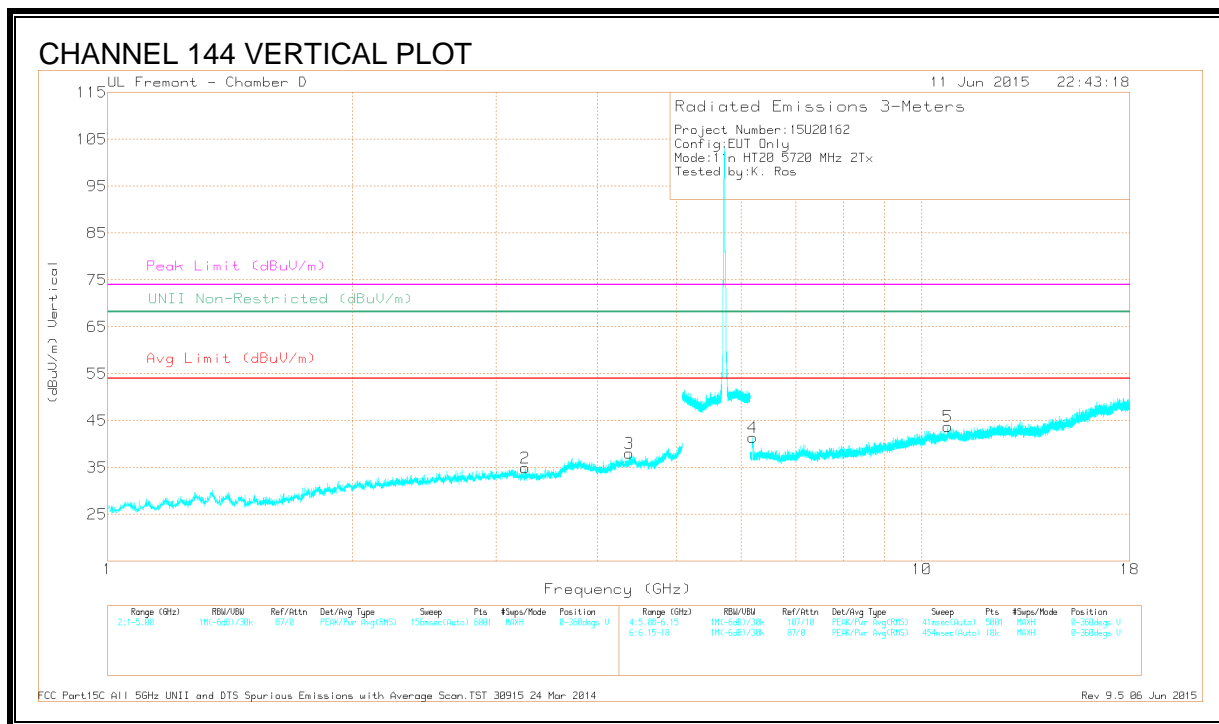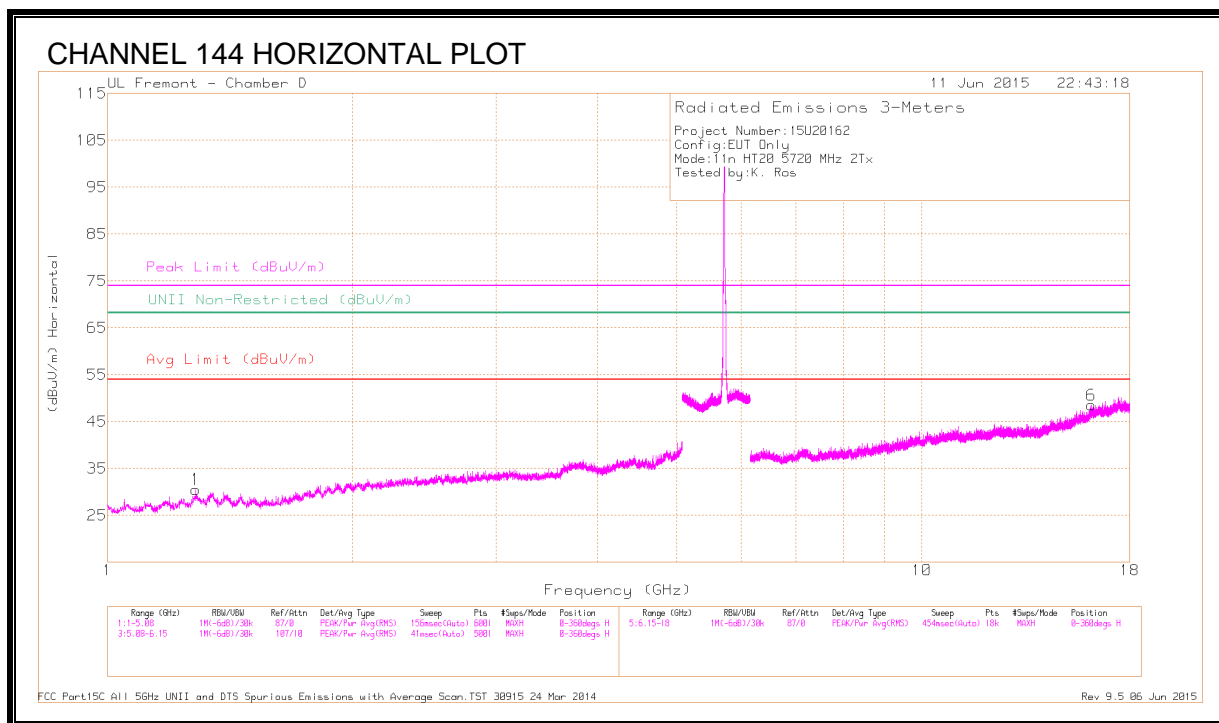

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.285	41.03	PK3	28.9	-31.9	38.03	-	-	74	-35.97	-	-	168	141	H
	* 1.284	29.54	ADR	28.9	-31.9	26.54	54	-27.46	-	-	-	-	168	141	H
3	* 4.376	38.4	PK3	33.8	-27.9	44.3	-	-	74	-29.7	-	-	276	133	V
	* 4.374	26.74	ADR	33.8	-28	32.54	54	-21.46	-	-	-	-	276	133	V
6	* 16.153	33.85	PK3	41.4	-20	55.25	-	-	74	-18.75	-	-	207	157	H
	* 16.152	22.94	ADR	41.4	-20	44.34	54	-9.66	-	-	-	-	207	157	H
5	* 10.754	33.75	PK3	37.9	-21.1	50.55	-	-	74	-23.45	-	-	191	240	V
	* 10.756	22.73	ADR	37.9	-21	39.63	54	-14.37	-	-	-	-	191	240	V
2	3.259	39.18	PK3	32.7	-29.6	42.28	-	-	-	-	68.2	-25.92	142	115	V
4	6.201	42.72	PK3	35.5	-26.7	51.52	-	-	-	-	68.2	-16.68	234	279	V


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.16. 802.11n HT40 1Tx MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL)

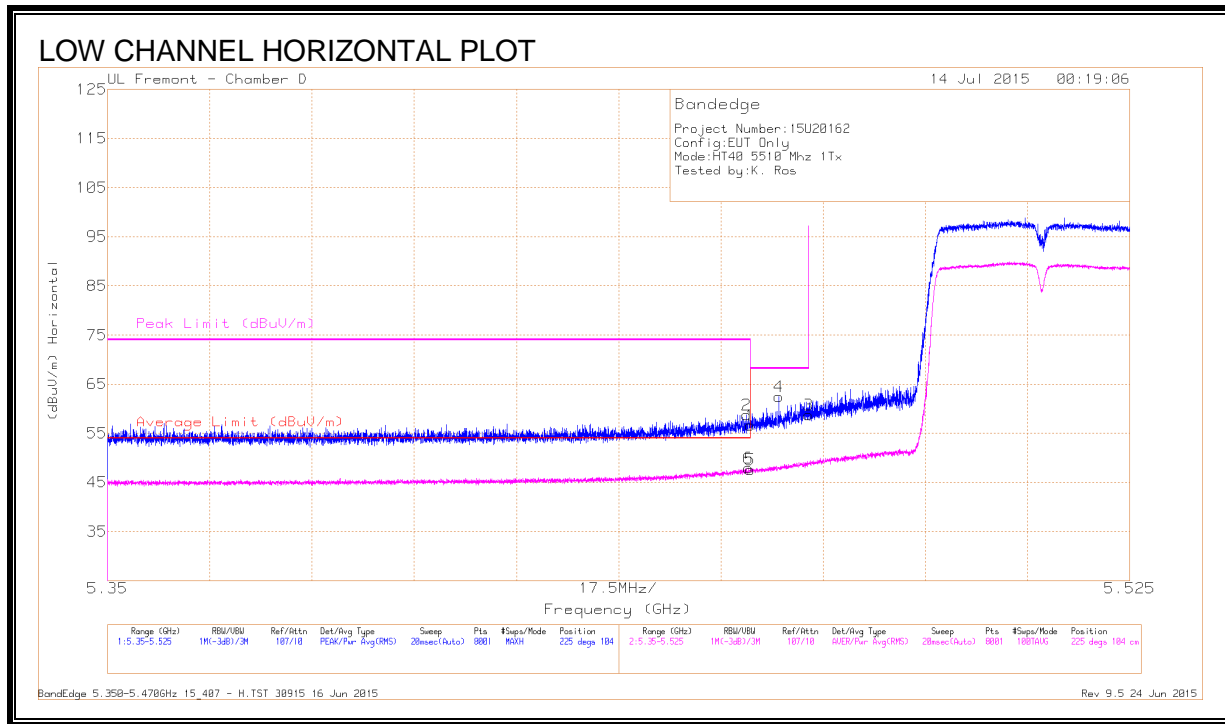


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.25	Pk	34.4	-18	56.65	-	-	74	-17.35	225	104	H
2	* 5.459	42.39	Pk	34.4	-18	58.79	-	-	74	-15.21	225	104	H
5	* 5.46	31.22	RMS	34.4	-18	47.62	54	-6.38	-	-	225	104	H
6	* 5.46	31.49	RMS	34.4	-18	47.89	54	-6.11	-	-	225	104	H
4	5.465	46.11	Pk	34.4	-18	62.51	-	-	68.2	-5.69	225	104	H
3	5.47	42.36	Pk	34.4	-18	58.76	-	-	68.2	-9.44	225	104	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

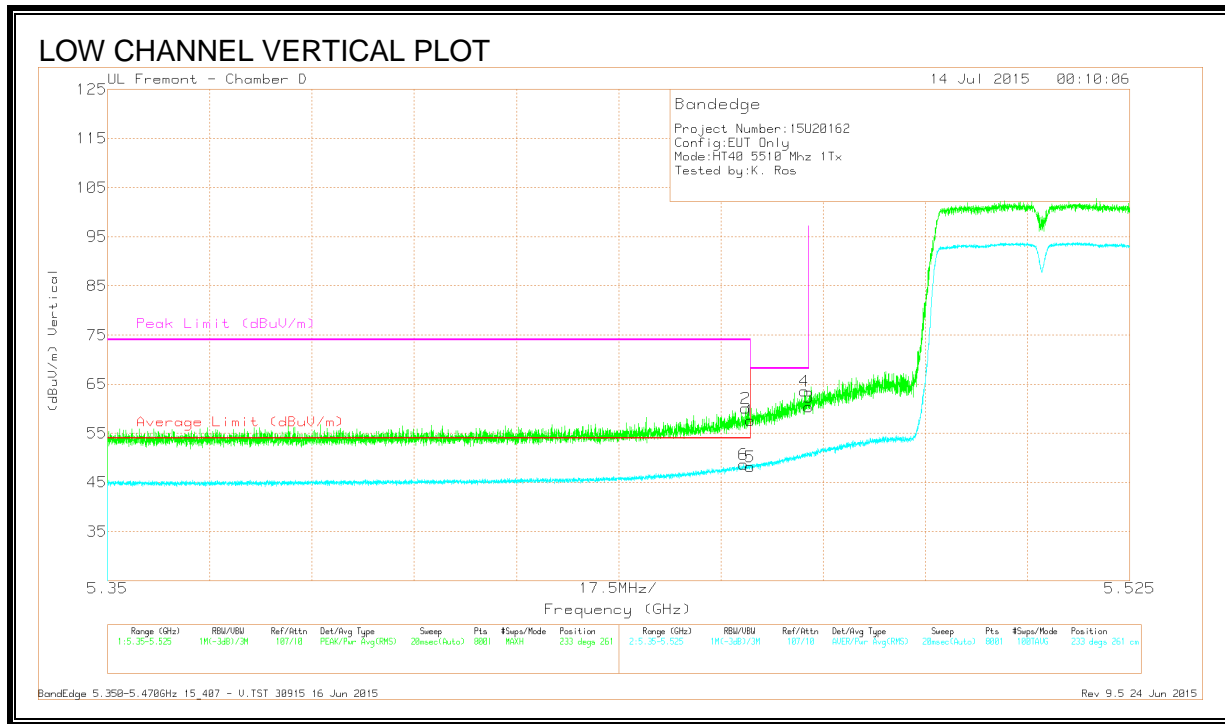

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.21	Pk	34.4	-18	57.61	-	-	74	-16.39	233	261	V
2	* 5.459	43.75	Pk	34.4	-18	60.15	-	-	74	-13.85	233	261	V
5	* 5.46	31.73	RMS	34.4	-18	48.13	54	-5.87	-	-	233	261	V
6	* 5.459	32.25	RMS	34.4	-18	48.65	54	-5.35	-	-	233	261	V
4	5.469	47.23	Pk	34.4	-18	63.63	-	-	68.2	-4.57	233	261	V
3	5.47	43.92	Pk	34.4	-18	60.32	-	-	68.2	-7.88	233	261	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEDGE, CHAIN 0 (HIGH CHANNEL)

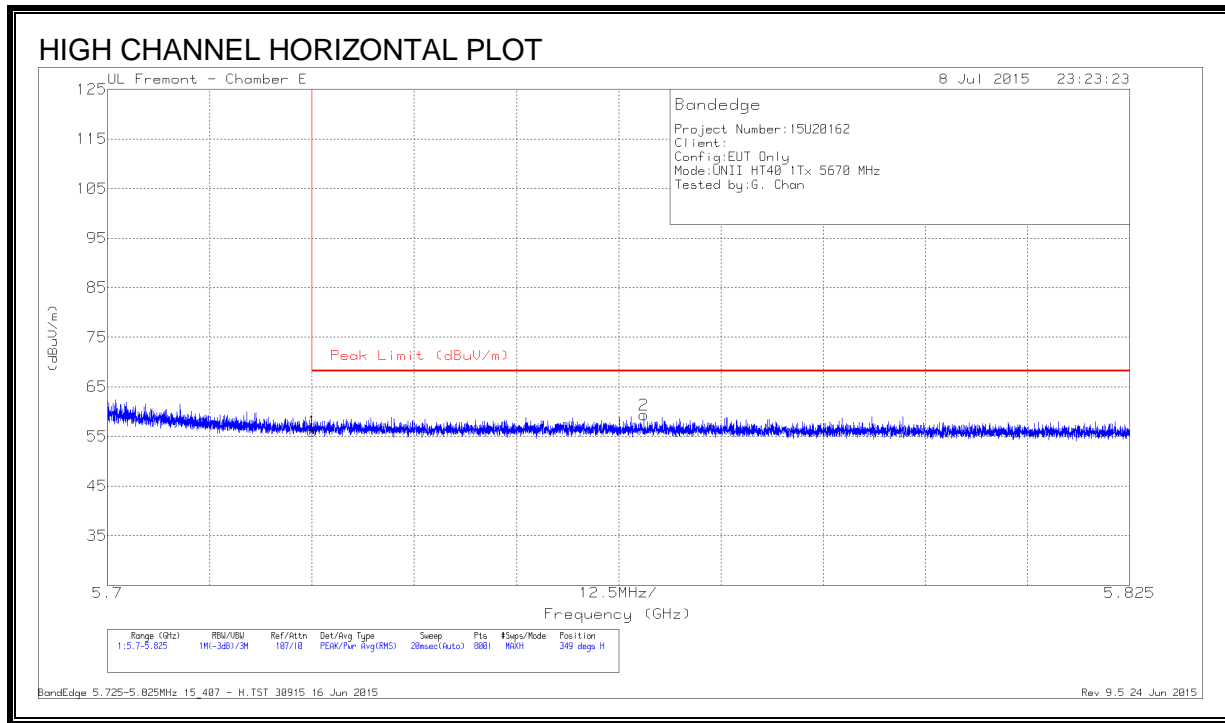

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.34	Pk	34.7	-21	56.04	68.2	-12.16	349	305	H
2	5.766	45.34	Pk	34.8	-20.8	59.34	68.2	-8.86	349	305	H

Pk - Peak detector


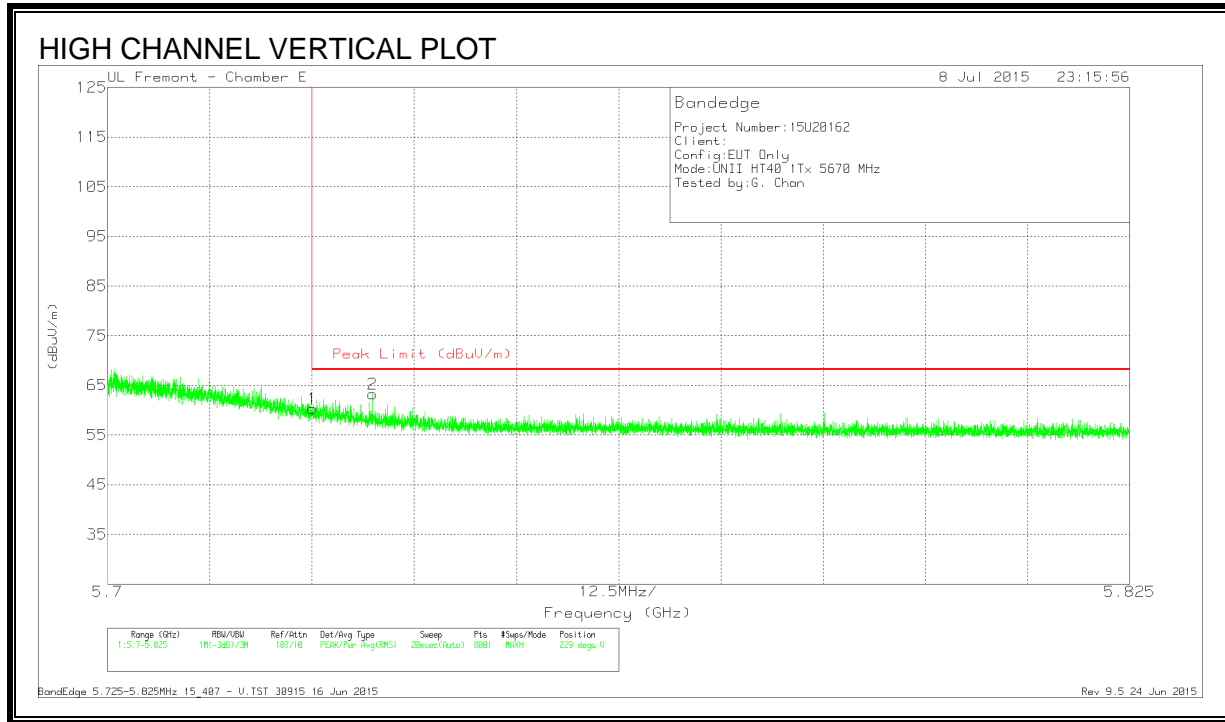


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cb/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.61	Pk	34.7	-21	60.31	68.2	-7.89	229	204	V
2	5.732	49.46	Pk	34.7	-20.9	63.26	68.2	-4.94	229	204	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

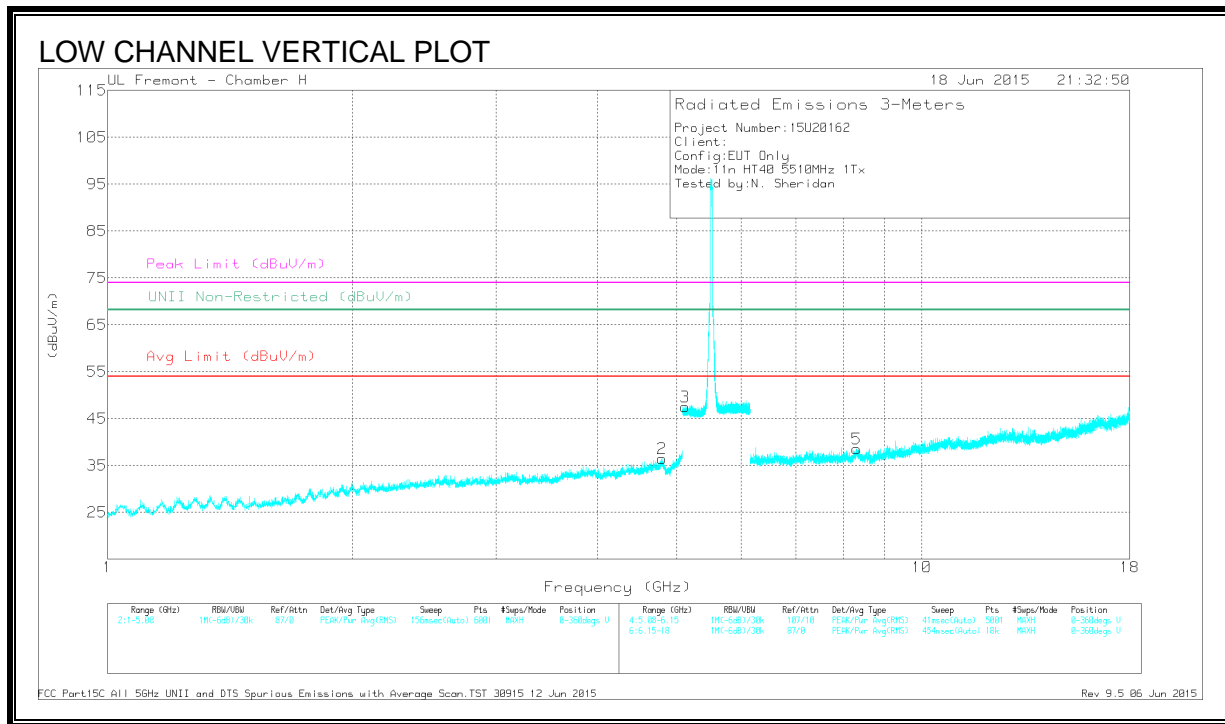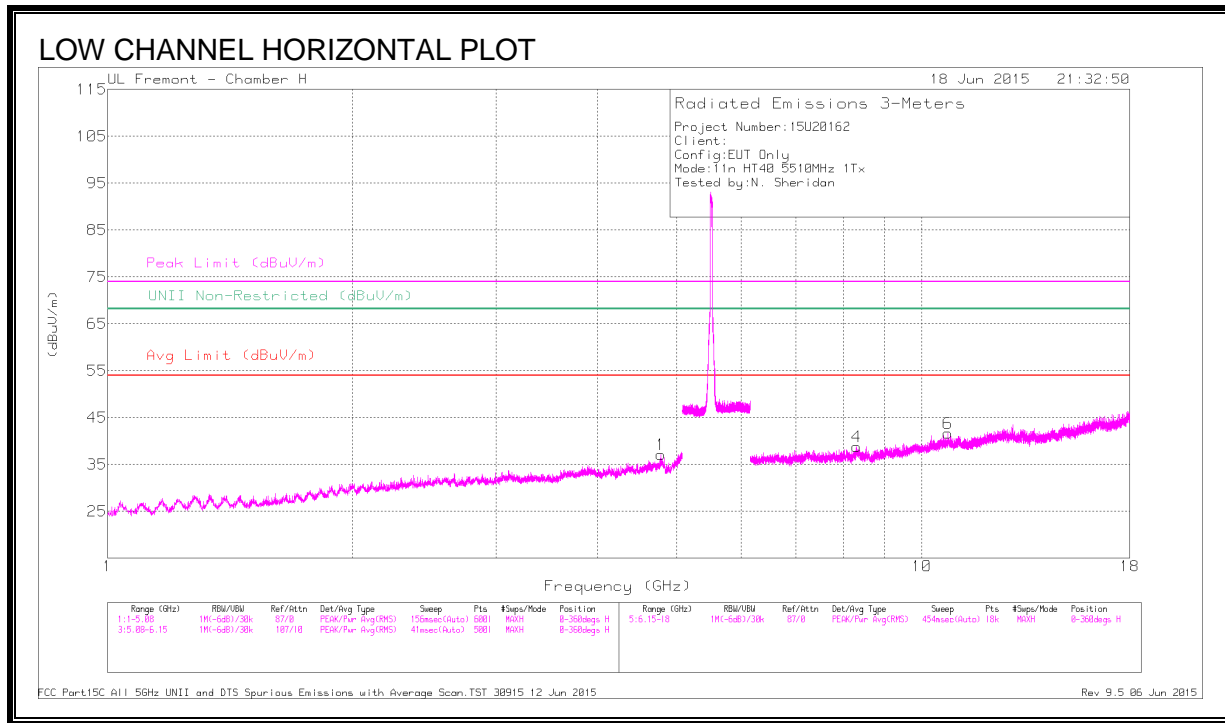

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T63 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.783	41.61	PK3	34.2	-31.9	43.91	-	-	74	-30.09	-	-	23	143	H
	* 4.785	30.82	ADR	34.2	-31.9	33.12	54	-20.88	-	-	-	-	23	143	H
2	* 4.798	41.91	PK3	34.2	-32	44.11	-	-	74	-29.89	-	-	6	109	V
	* 4.796	30.62	ADR	34.2	-32.1	32.72	54	-21.28	-	-	-	-	6	109	V
3	* 5.12	44.1	PK3	34.4	-22.9	55.6	-	-	74	-18.4	-	-	35	180	V
	* 5.12	32.66	ADR	34.4	-22.9	44.16	54	-9.84	-	-	-	-	35	180	V
4	* 8.314	38.13	PK3	35.9	-27.1	46.93	-	-	74	-27.07	-	-	188	115	H
	* 8.313	26.6	ADR	35.9	-27.1	35.4	54	-18.6	-	-	-	-	188	115	H
6	* 10.756	35.54	PK3	37.9	-25.3	48.14	-	-	74	-25.86	-	-	28	131	H
	* 10.755	24.41	ADR	37.9	-25.3	37.01	54	-16.99	-	-	-	-	28	131	H
5	* 8.32	37.79	PK3	35.9	-27.3	46.39	-	-	74	-27.61	-	-	9	127	V
	* 8.317	26.74	ADR	35.9	-27.2	35.44	54	-18.56	-	-	-	-	9	127	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

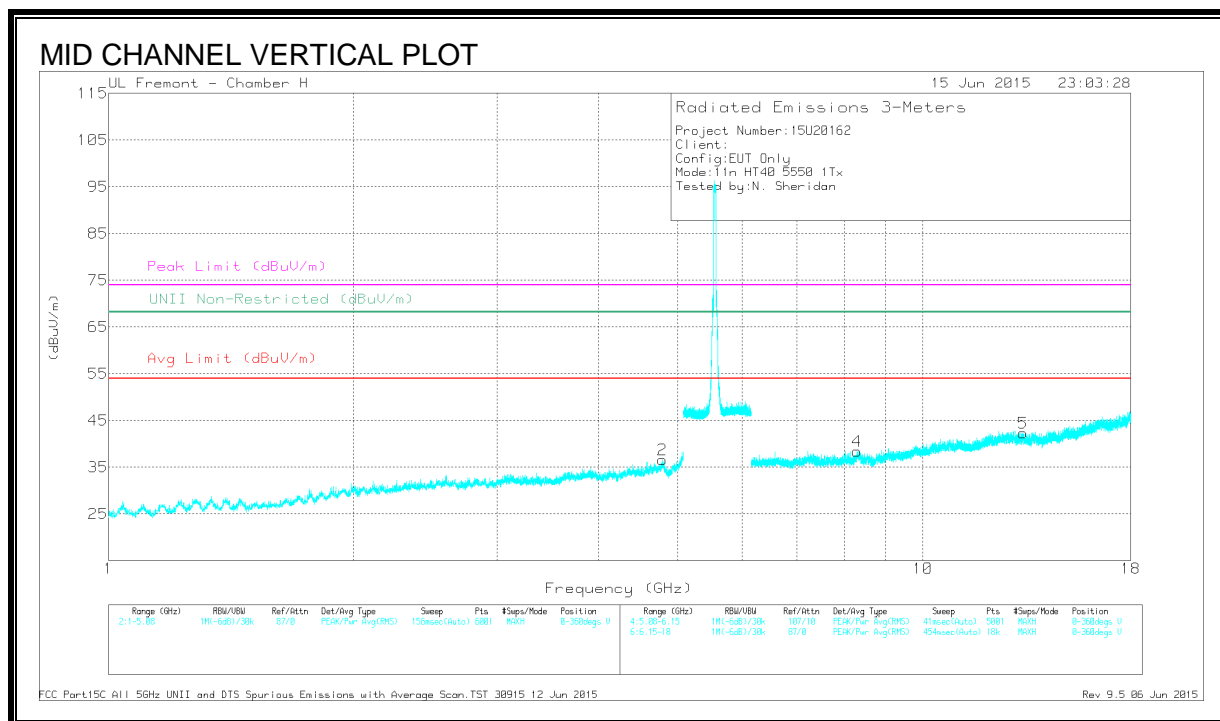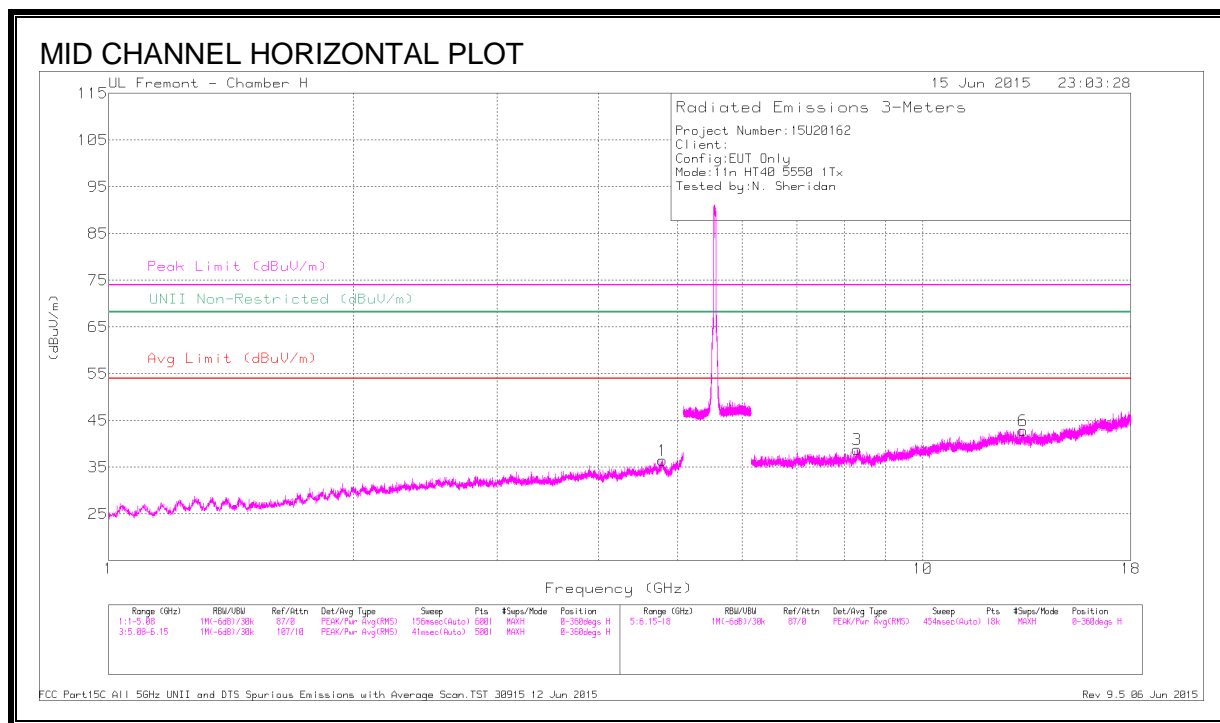

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T63 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.787	42.33	PK3	34.2	-32	44.53	-	-	74	-29.47	-	-	337	246	H
	* 4.786	30.27	ADR	34.2	-32	32.47	54	-21.53	-	-	-	-	337	246	H
2	* 4.784	42.4	PK3	34.2	-31.9	44.7	-	-	74	-29.3	-	-	3	166	V
	* 4.786	30.34	ADR	34.2	-32	32.54	54	-21.46	-	-	-	-	3	166	V
3	* 8.304	37.47	PK3	35.9	-27.3	46.07	-	-	74	-27.93	-	-	176	373	H
	* 8.305	25.95	ADR	35.9	-27.3	34.55	54	-19.45	-	-	-	-	176	373	H
6	* 13.268	36.26	PK3	39.4	-25.3	50.36	-	-	74	-23.64	-	-	176	100	H
	* 13.269	25.08	ADR	39.4	-25.2	39.28	54	-14.72	-	-	-	-	176	100	H
4	* 8.306	37.48	PK3	35.9	-27.3	46.08	-	-	74	-27.92	-	-	337	155	V
	* 8.307	25.89	ADR	35.9	-27.2	34.59	54	-19.41	-	-	-	-	337	155	V
5	* 13.278	36.17	PK3	39.4	-25.2	50.37	-	-	74	-23.63	-	-	337	201	V
	* 13.277	25.19	ADR	39.4	-25.2	39.39	54	-14.61	-	-	-	-	337	201	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

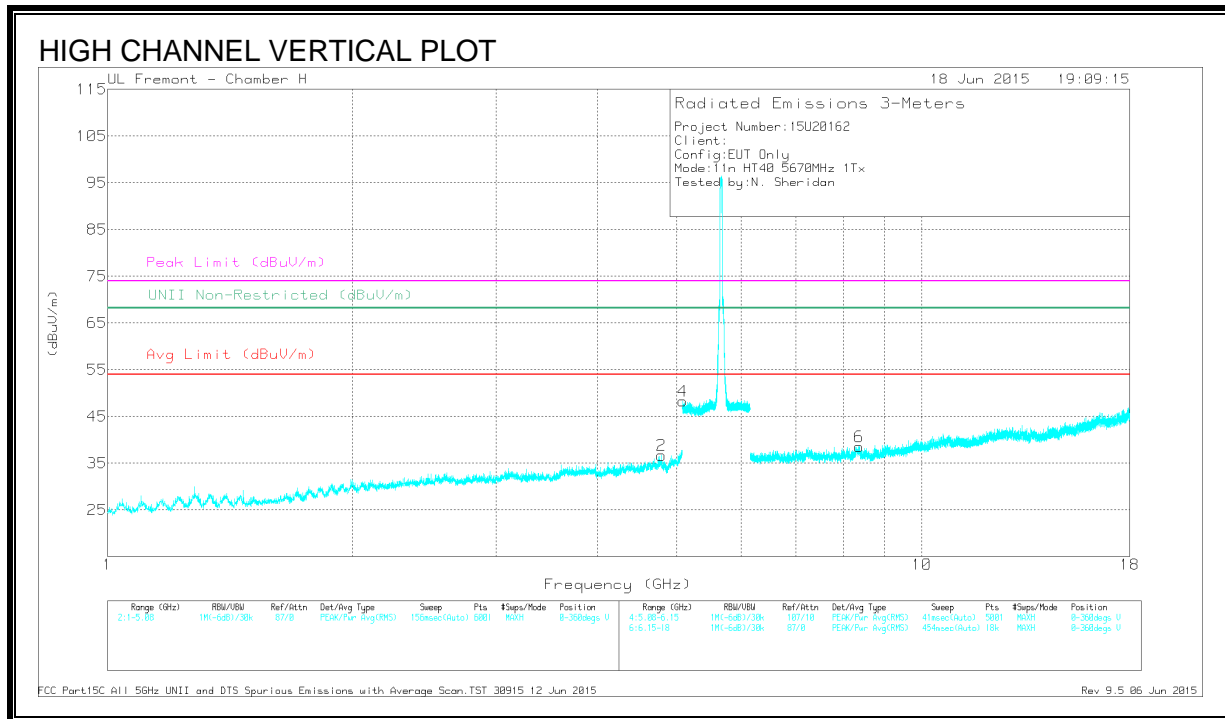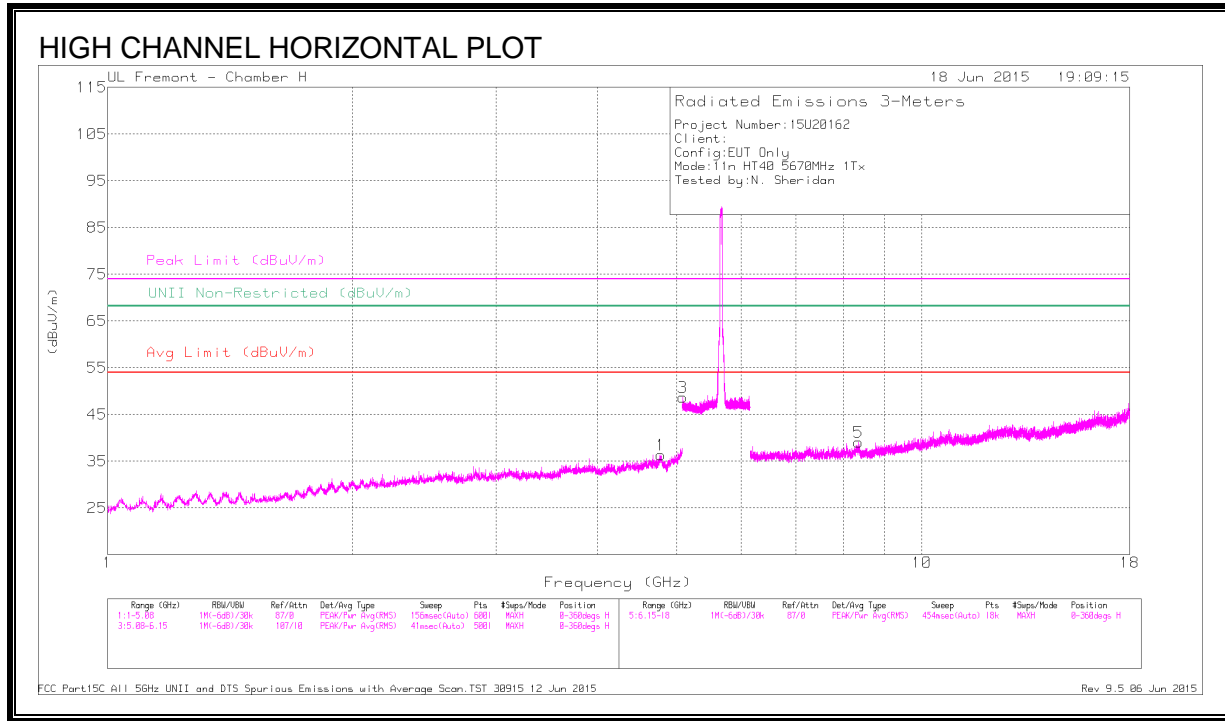

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Flt r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.784	41.62	PK3	34.2	-31.9	43.92	-	-	74	-30.08	-	-	34	156	H
	* 4.784	30.7	ADR	34.2	-31.9	33	54	-21	-	-	-	-	34	156	H
2	* 4.788	42.15	PK3	34.2	-32	44.35	-	-	74	-29.65	-	-	98	156	V
	* 4.788	30.7	ADR	34.2	-32	32.9	54	-21.1	-	-	-	-	98	156	V
3	* 5.083	44.46	PK3	34.3	-22.9	55.86	-	-	74	-18.14	-	-	35	174	H
	* 5.081	32.75	ADR	34.3	-22.9	44.15	54	-9.85	-	-	-	-	35	174	H
4	* 5.085	44.42	PK3	34.3	-22.9	55.82	-	-	74	-18.18	-	-	3	143	V
	* 5.086	32.69	ADR	34.3	-22.9	44.09	54	-9.91	-	-	-	-	3	143	V
5	* 8.362	38.35	PK3	35.9	-27.8	46.45	-	-	74	-27.55	-	-	19	160	H
	* 8.363	27.27	ADR	35.9	-27.8	35.37	54	-18.63	-	-	-	-	19	160	H
6	* 8.373	39.12	PK3	35.9	-27.9	47.12	-	-	74	-26.88	-	-	9	115	V
	* 8.374	27.25	ADR	35.9	-27.9	35.25	54	-18.75	-	-	-	-	9	115	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS

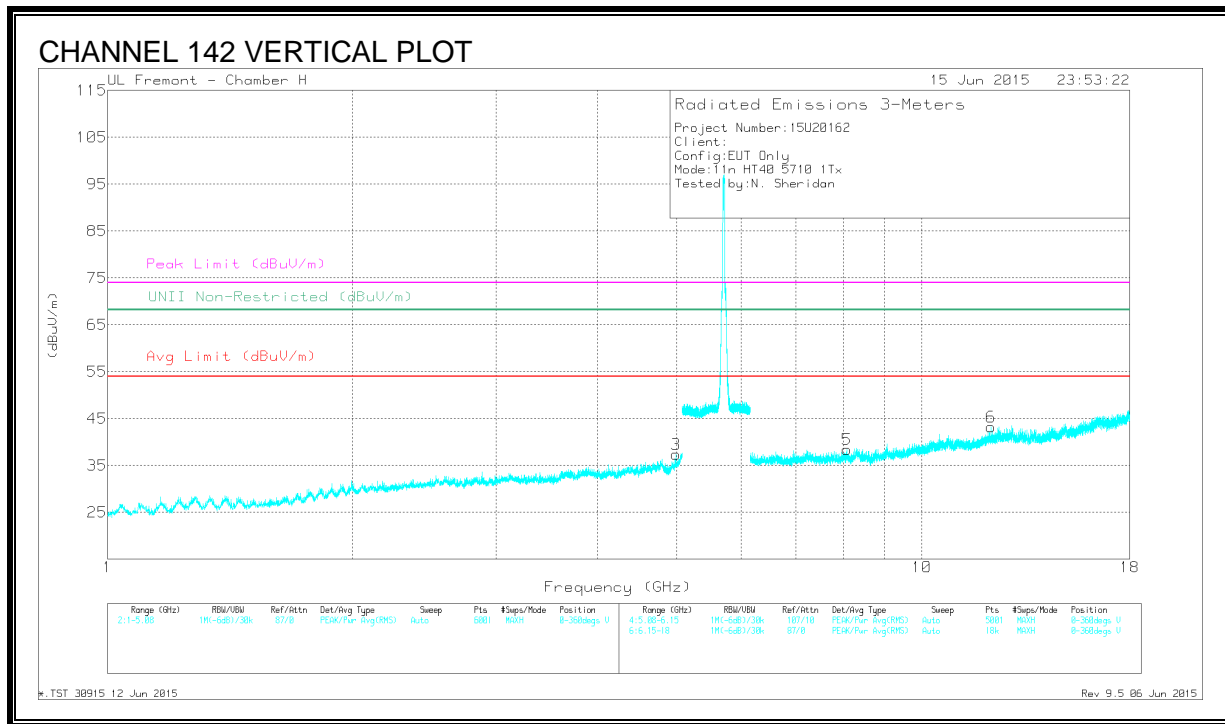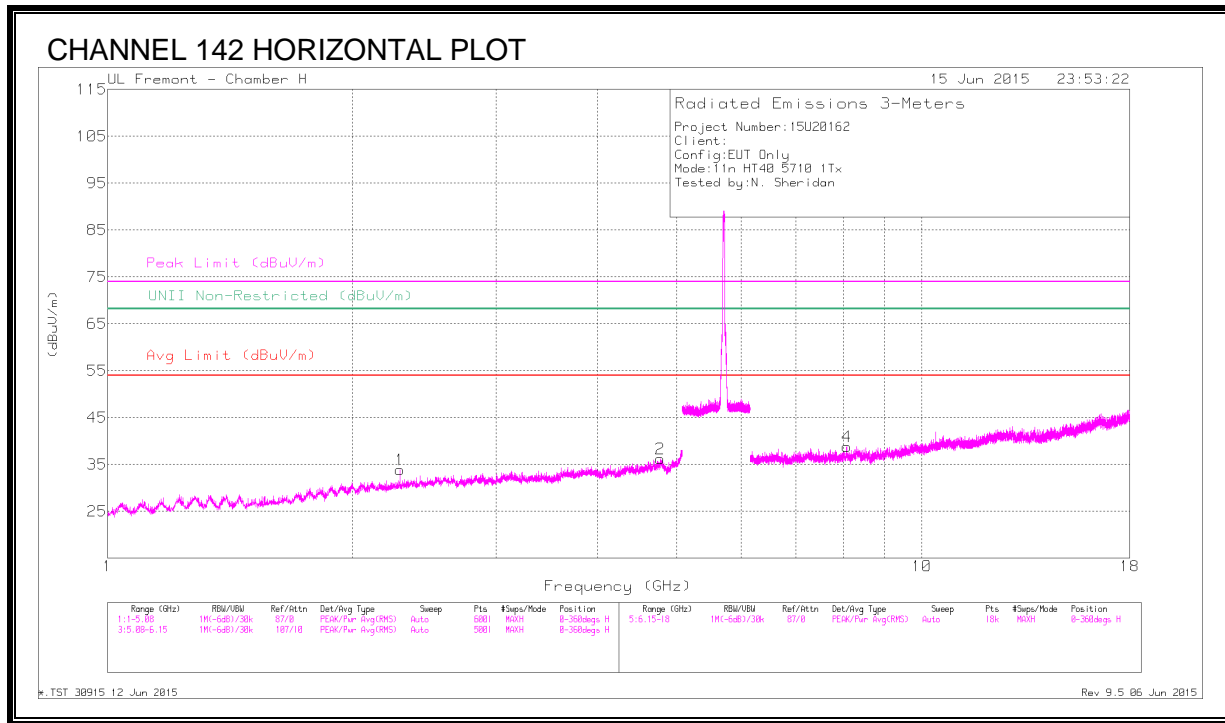

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T63 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.287	42	PK3	31.7	-34	39.7	-	-	74	-34.3	-	-	16	272	H
	* 2.285	30.01	ADR	31.7	-34	27.71	54	-26.29	-	-	-	-	16	272	H
2	* 4.772	41.91	PK3	34.2	-31.8	44.31	-	-	74	-29.69	-	-	197	109	H
	* 4.774	30.13	ADR	34.2	-31.8	32.53	54	-21.47	-	-	-	-	197	109	H
3	* 4.988	40.84	PK3	34.3	-31.2	43.94	-	-	74	-30.06	-	-	334	380	V
	* 4.988	29.33	ADR	34.3	-31.2	32.43	54	-21.57	-	-	-	-	334	380	V
4	* 8.087	38.42	PK3	35.9	-28.2	46.12	-	-	74	-27.88	-	-	337	182	H
	* 8.087	26.36	ADR	35.9	-28.2	34.06	54	-19.94	-	-	-	-	337	182	H
5	* 8.095	37.78	PK3	35.9	-28.3	45.38	-	-	74	-28.62	-	-	337	201	V
	* 8.093	26.86	ADR	35.9	-28.3	34.46	54	-19.54	-	-	-	-	337	201	V
6	* 12.166	35.58	PK3	39	-25.3	49.28	-	-	74	-24.72	-	-	337	201	V
	* 12.167	24.59	ADR	39	-25.3	38.29	54	-15.71	-	-	-	-	337	201	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

RESTRICTED BANDEDGE, CHAIN 1 (LOW CHANNEL)

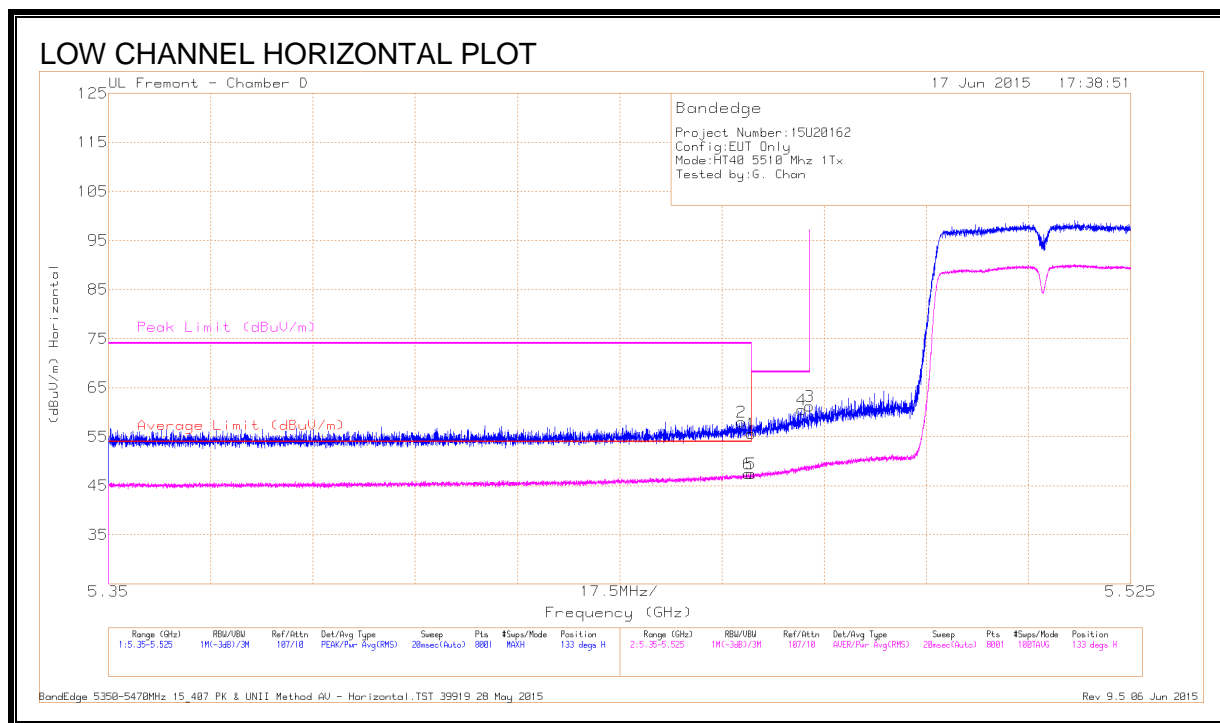


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.2	Pk	34.4	-18	55.6	-	-	74	-18.4	133	203	H
2	* 5.458	41.64	Pk	34.4	-18	58.04	-	-	74	-15.96	133	203	H
3	5.47	44.81	Pk	34.4	-18	61.21	-	-	68.2	-6.99	133	203	H
4	5.469	44.09	Pk	34.4	-18	60.49	-	-	68.2	-7.71	133	203	H
5	* 5.46	31	RMS	34.4	-18	47.4	54	-6.6	-	-	133	203	H
6	* 5.46	31.08	RMS	34.4	-18	47.48	54	-6.52	-	-	133	203	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

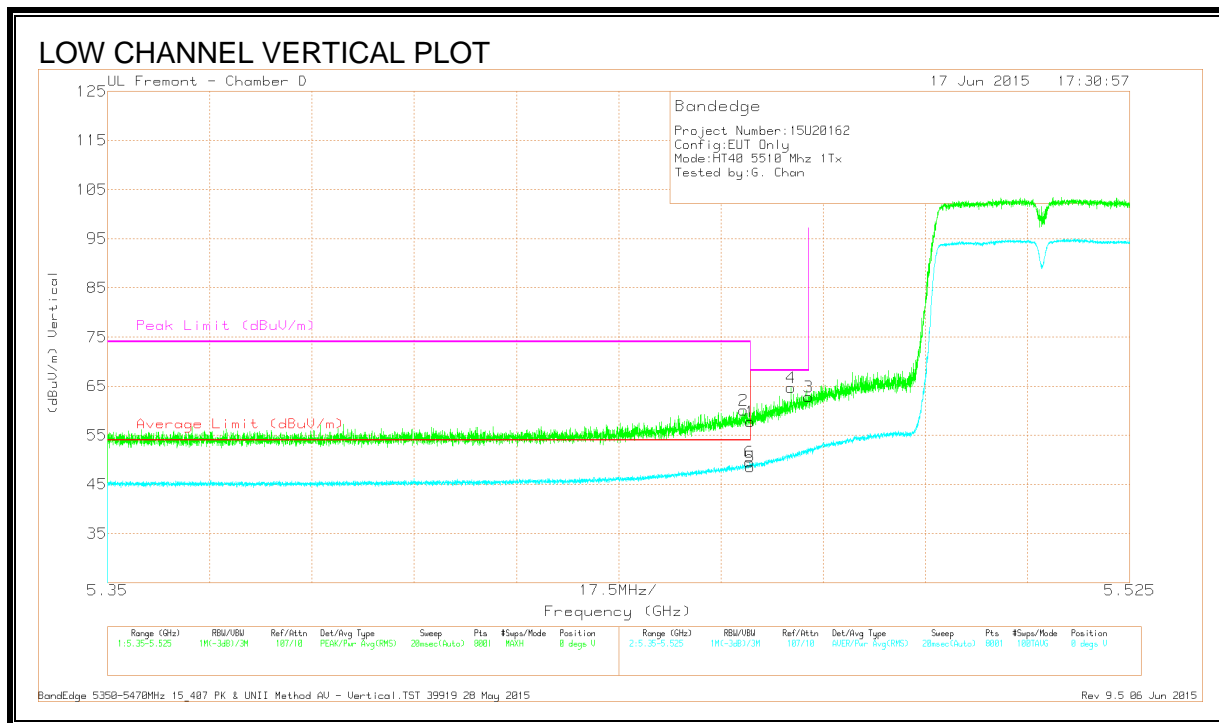

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.39	Pk	34.4	-18	57.79	-	-	74	-16.21	0	175	V
2	* 5.459	43.75	Pk	34.4	-18	60.15	-	-	74	-13.85	0	175	V
3	5.47	46.43	Pk	34.4	-18	62.83	-	-	68.2	-5.37	0	175	V
4	5.467	48.35	Pk	34.4	-18	64.75	-	-	68.2	-3.45	0	175	V
5	* 5.46	32.21	RMS	34.4	-18	48.61	54	-5.39	-	-	0	175	V
6	* 5.46	33.1	RMS	34.4	-18	49.5	54	-4.5	-	-	0	175	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEDGE, CHAIN 1 (HIGH CHANNEL)

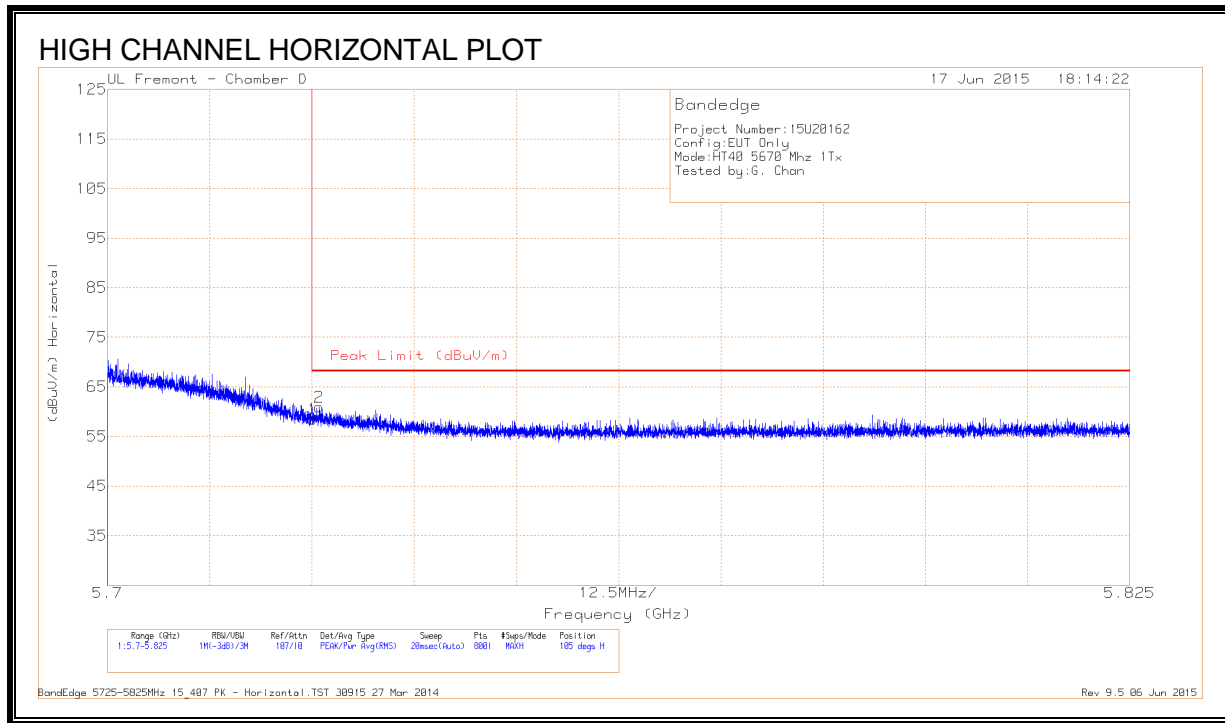

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.5	Pk	34.6	-17.6	58.5	68.2	-9.7	105	272	H
2	5.726	43.91	Pk	34.6	-17.6	60.91	68.2	-7.29	105	272	H

Pk - Peak detector


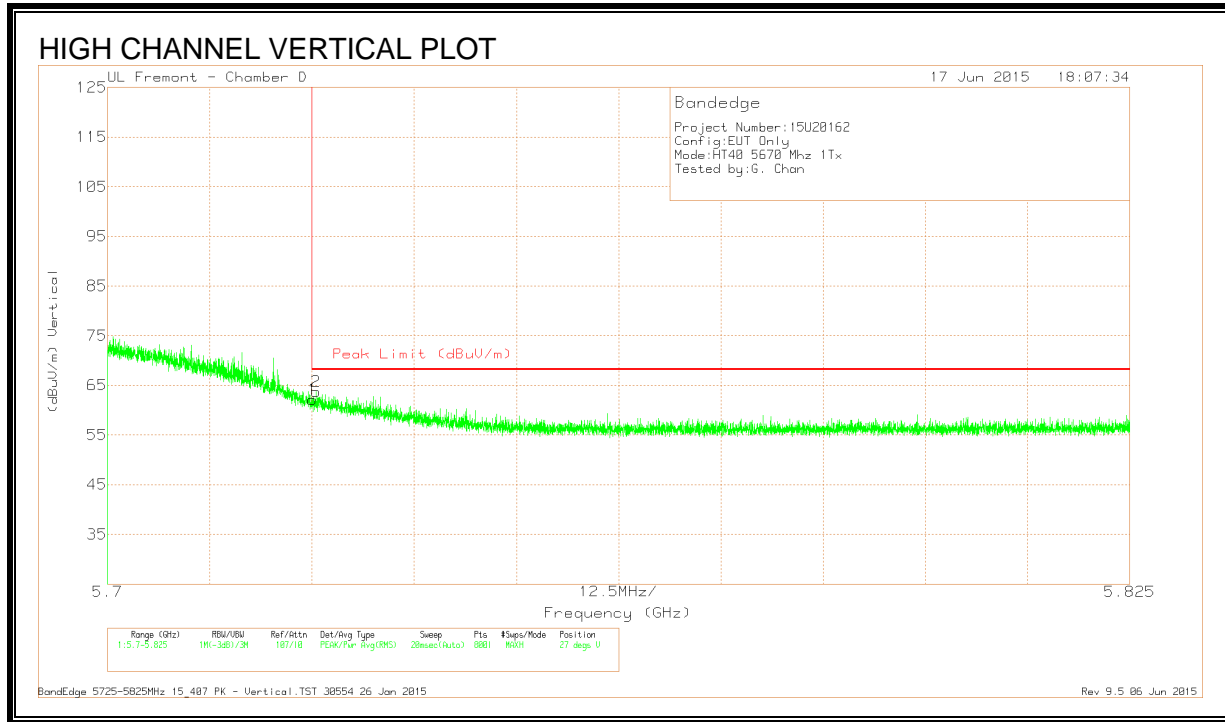


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.17	Pk	34.6	-17.6	62.17	68.2	-6.03	27	321	V
2	5.725	46.79	Pk	34.6	-17.6	63.79	68.2	-4.41	27	321	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

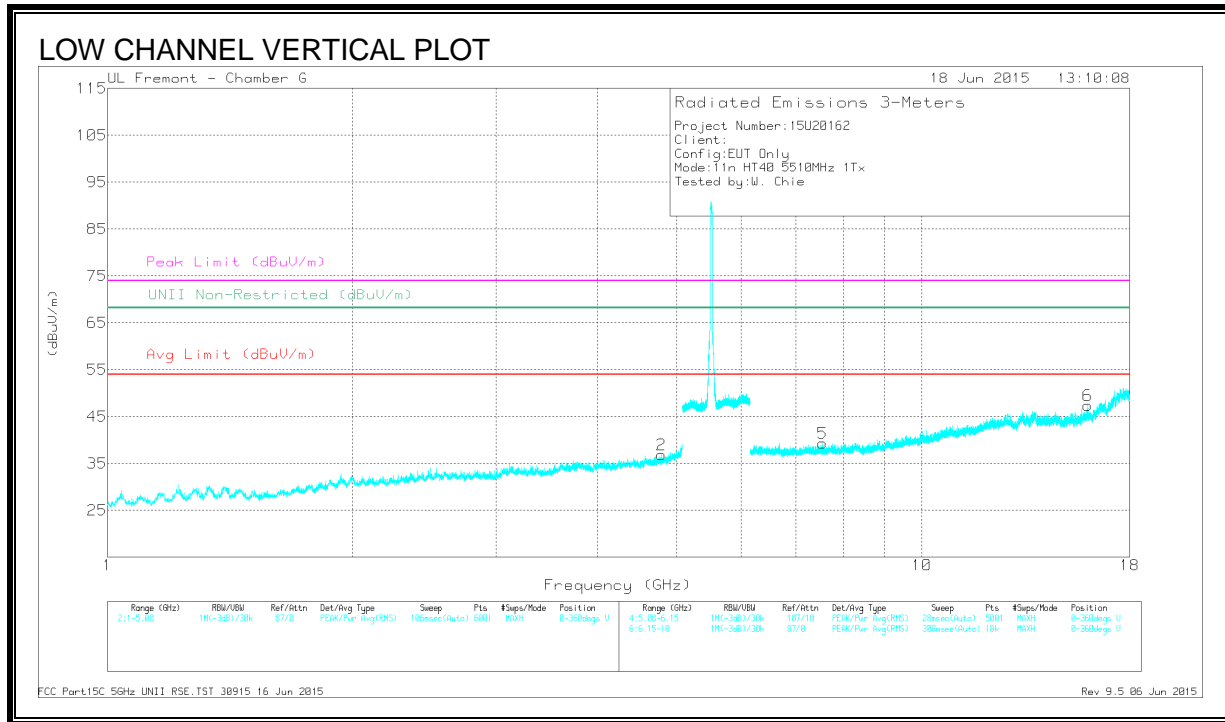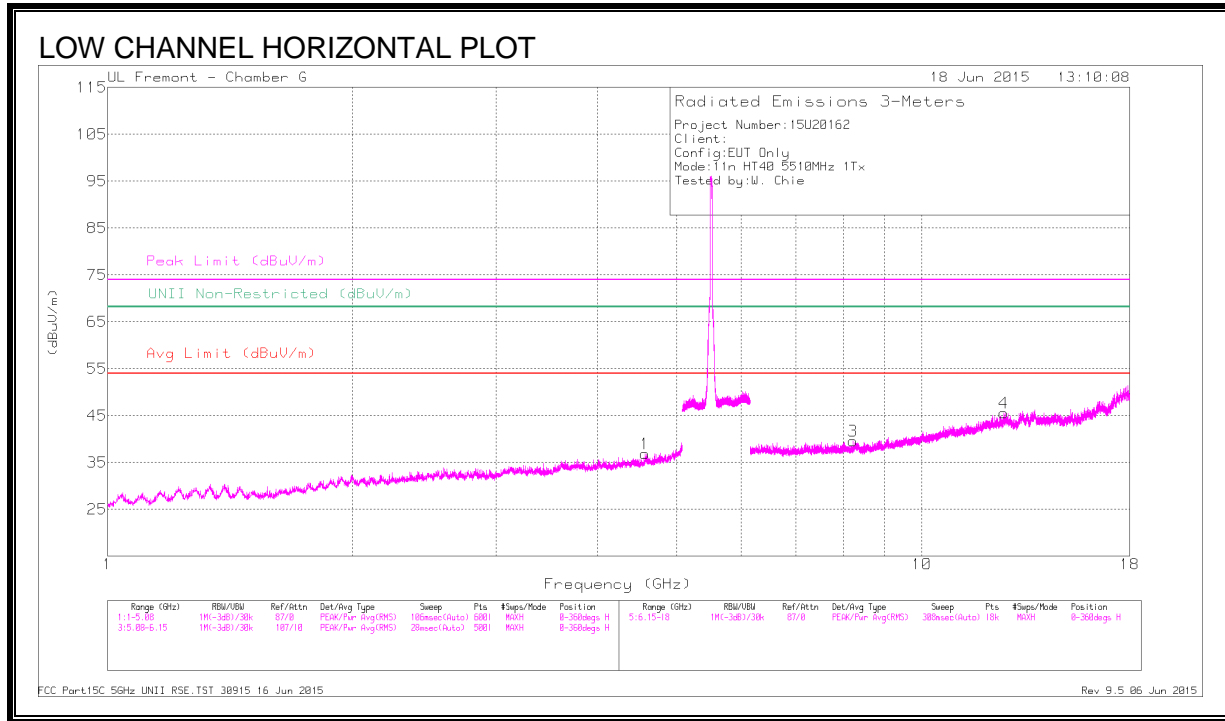

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.571	41.69	PK3	33.8	-32.1	43.39	-	-	74	-30.61	-	-	230	155	H
	* 4.572	30.04	ADR	33.8	-32.1	31.74	54	-22.26	-	-	-	-	230	155	H
2	* 4.787	43.03	PK3	34	-32.3	44.73	-	-	74	-29.27	-	-	14	174	V
	* 4.788	29.89	ADR	34	-32.3	31.59	54	-22.41	-	-	-	-	14	174	V
3	* 8.227	40.83	PK3	35.7	-29.9	46.63	-	-	74	-27.37	-	-	27	338	H
	* 8.226	28.08	ADR	35.7	-29.9	33.88	54	-20.12	-	-	-	-	27	338	H
4	* 12.611	38.26	PK3	39.2	-25.5	51.96	-	-	74	-22.04	-	-	259	151	H
	* 12.611	26.11	ADR	39.2	-25.5	39.81	54	-14.19	-	-	-	-	259	151	H
5	* 7.552	40.78	PK3	35.6	-30.4	45.98	-	-	74	-28.02	-	-	202	111	V
	* 7.554	28.71	ADR	35.6	-30.4	33.91	54	-20.09	-	-	-	-	202	111	V
6	* 15.983	38.97	PK3	40.4	-25	54.37	-	-	74	-19.63	-	-	242	390	V
	* 15.983	26.67	ADR	40.4	-25	42.07	54	-11.93	-	-	-	-	242	390	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

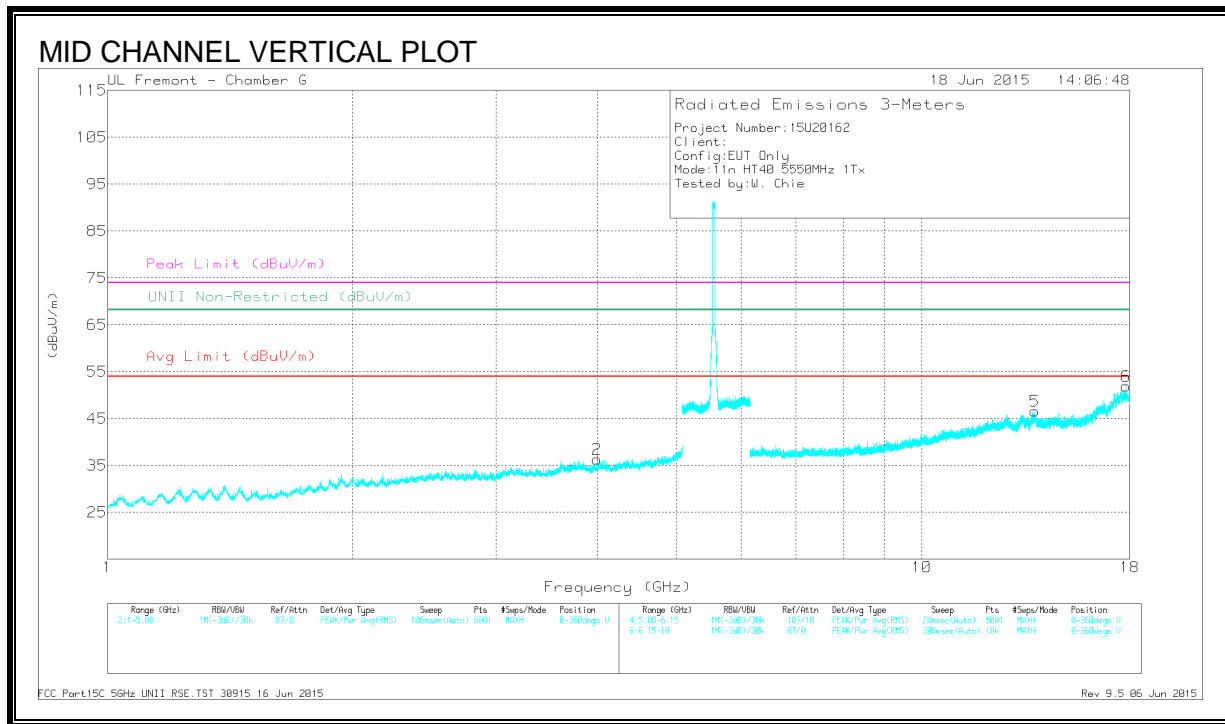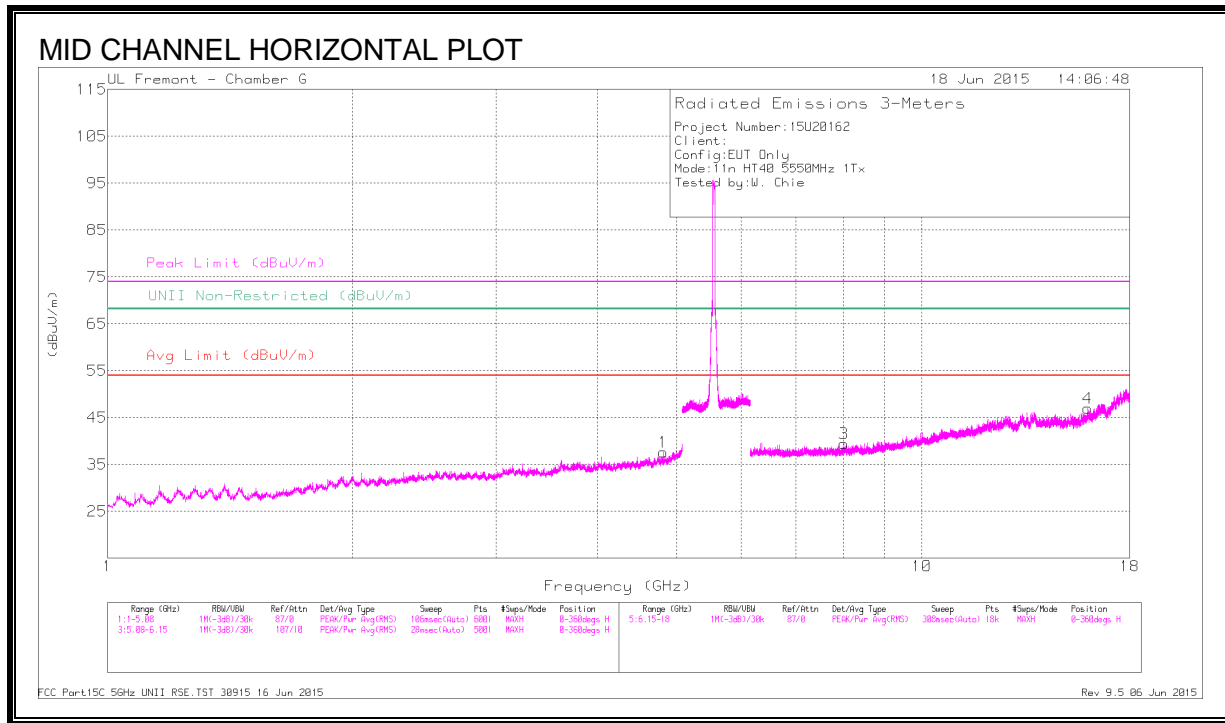

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.81	42.81	PK3	34	-32.3	44.51	-	-	74	-29.49	-	-	351	215	H
	* 4.81	33.06	ADR	34	-32.3	34.76	54	-19.24	-	-	-	-	351	215	H
2	* 3.992	42.19	PK3	33.3	-32.9	42.59	-	-	74	-31.41	-	-	273	209	V
	* 3.993	29.93	ADR	33.3	-32.9	30.33	54	-23.67	-	-	-	-	273	209	V
3	* 8.027	40.14	PK3	35.7	-29.9	45.94	-	-	74	-28.06	-	-	333	253	H
	* 8.025	28.15	ADR	35.7	-29.9	33.95	54	-20.05	-	-	-	-	333	253	H
4	* 15.982	38.66	PK3	40.4	-25.1	53.96	-	-	74	-20.04	-	-	309	330	H
	* 15.981	26.14	ADR	40.4	-25.1	41.44	54	-12.56	-	-	-	-	309	330	H
5	13.753	38.72	PK3	39.2	-24.5	53.42	-	-	-	-	68.2	-14.78	232	293	V
6	* 17.8	36.08	PK3	41.4	-19.5	57.98	-	-	74	-16.02	-	-	108	246	V
	* 17.801	23.63	ADR	41.4	-19.5	45.53	54	-8.47	-	-	-	-	108	246	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

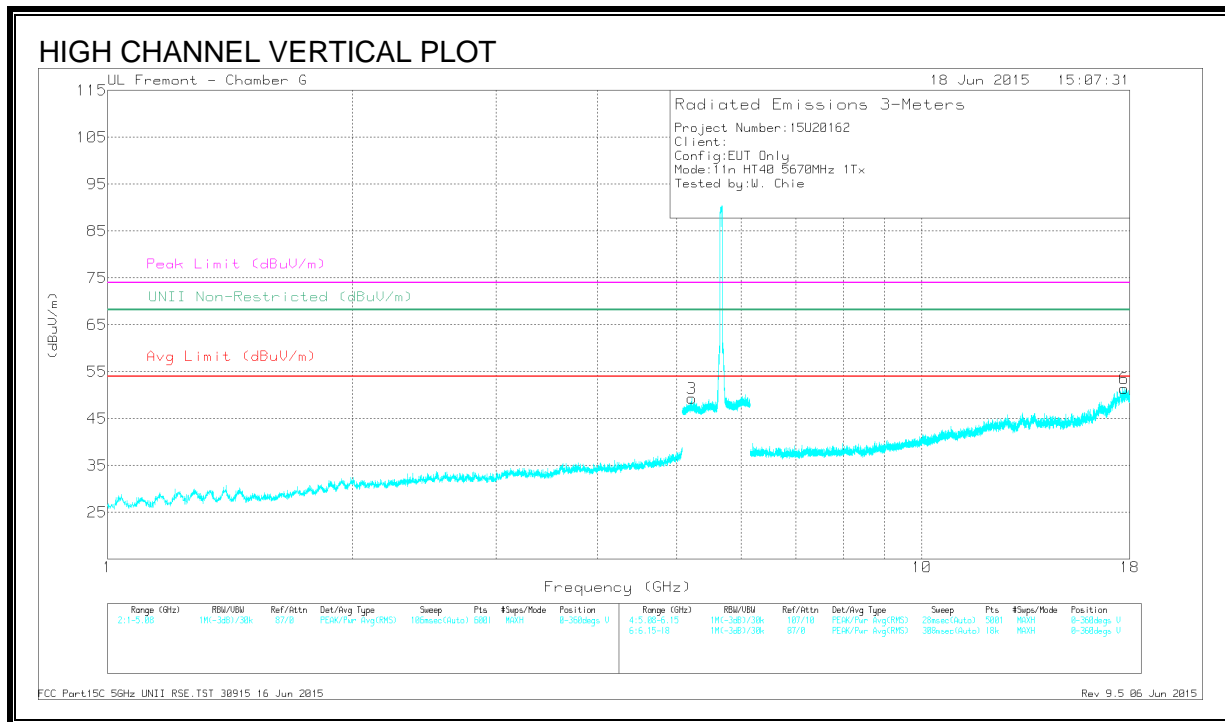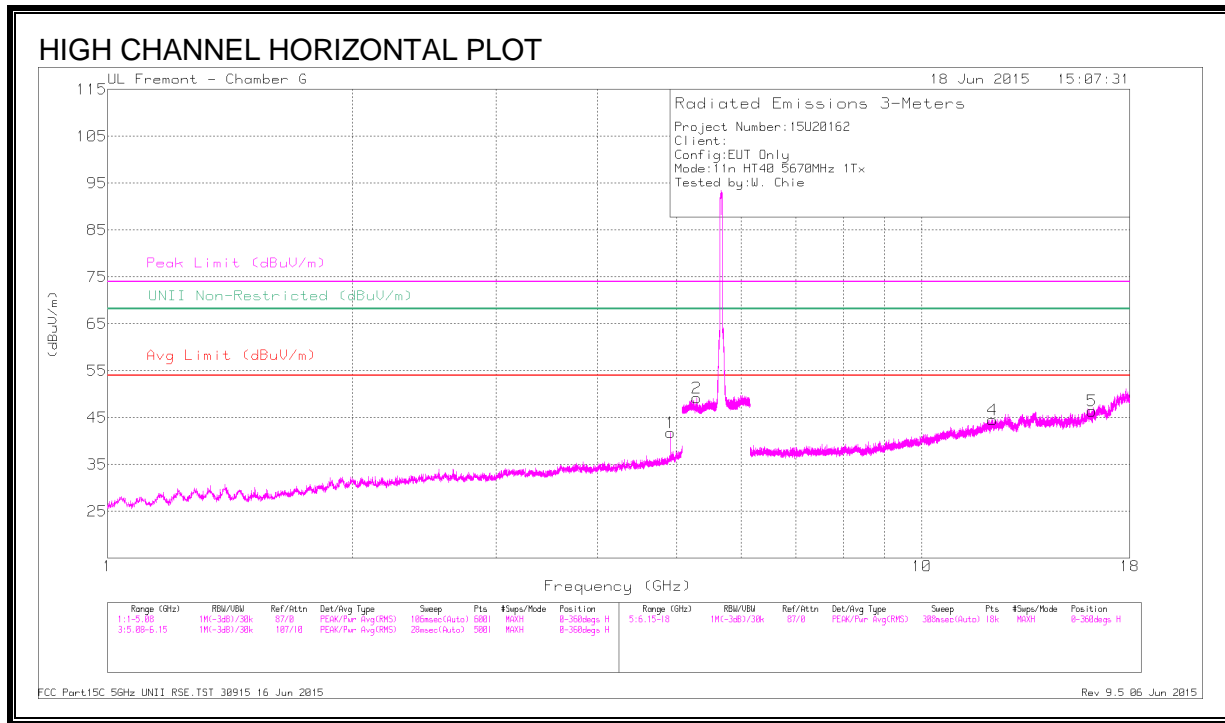

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filter/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.914	44.6	PK3	34.1	-31.4	47.3	-	-	74	-26.7	-	-	1	148	H
	* 4.914	37.28	ADR	34.1	-31.4	39.98	54	-14.02	-	-	-	-	1	148	H
2	5.292	43.98	PK3	34.4	-23.2	55.18	-	-	-	-	68.2	-13.02	137	164	H
3	5.215	44.67	PK3	34.4	-23.2	55.87	-	-	-	-	68.2	-12.33	180	210	V
4	* 12.211	37.15	PK3	39	-24.7	51.45	-	-	74	-22.55	-	-	263	181	H
	* 12.211	25.4	ADR	39	-24.7	39.7	54	-14.3	-	-	-	-	263	181	H
5	* 16.18	38.81	PK3	40.7	-25.9	53.61	-	-	74	-20.39	-	-	306	390	H
	* 16.18	26.69	ADR	40.7	-25.9	41.49	54	-12.51	-	-	-	-	306	390	H
6	* 17.722	37.58	PK3	41.4	-20.7	58.28	-	-	74	-15.72	-	-	93	195	V
	* 17.722	24.64	ADR	41.4	-20.7	45.34	54	-8.66	-	-	-	-	93	195	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS

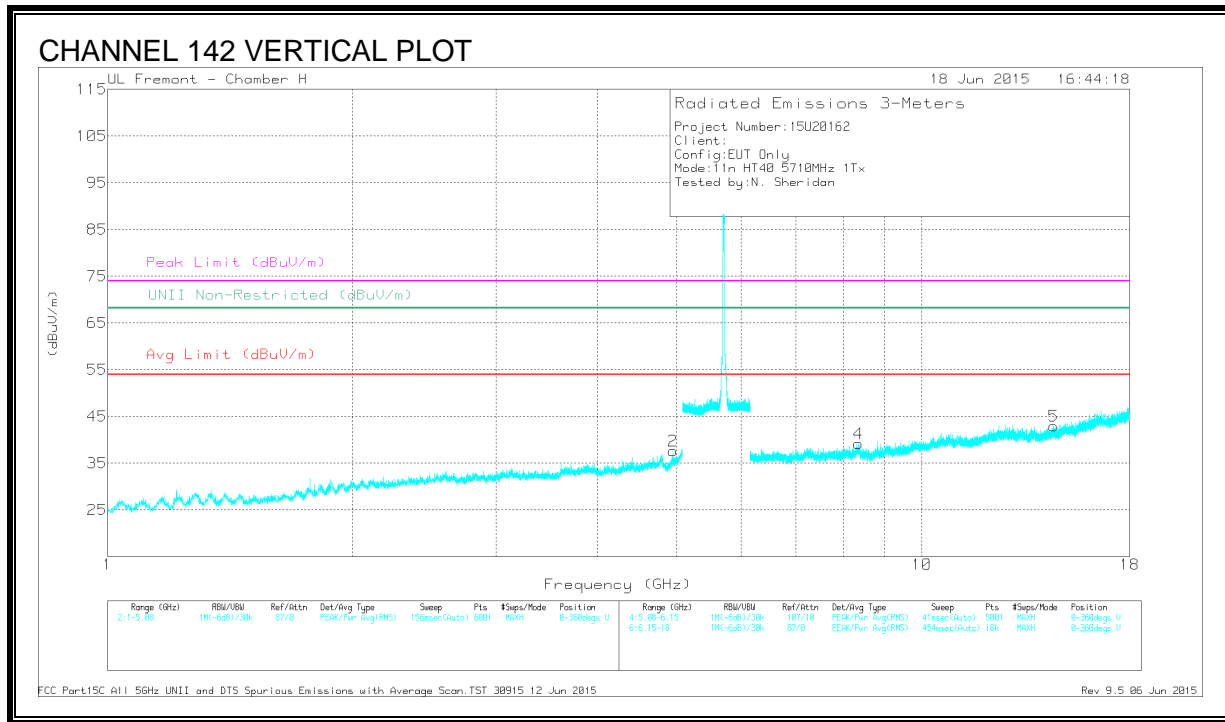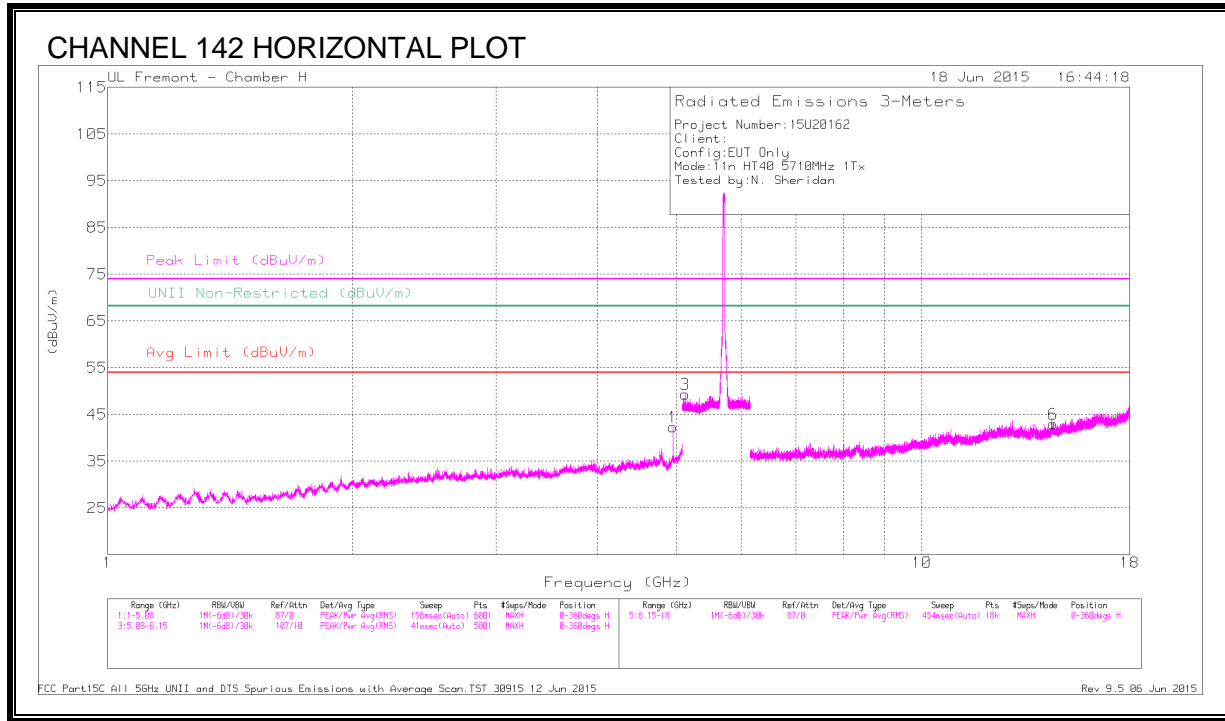

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.949	43.59	PK3	34.2	-31	46.79	-	-	74	-27.21	-	-	209	230	H
	* 4.949	37.06	ADR	34.2	-31	40.26	54	-13.74	-	-	-	-	209	230	H
2	* 4.948	41.86	PK3	34.2	-31	45.06	-	-	74	-28.94	-	-	85	248	V
	* 4.949	32.24	ADR	34.2	-31	35.44	54	-18.56	-	-	-	-	85	248	V
3	* 5.124	44.54	PK3	34.4	-22.8	56.14	-	-	74	-17.86	-	-	15	140	H
	* 5.124	32.67	ADR	34.4	-22.8	44.27	54	-9.73	-	-	-	-	15	140	H
4	* 8.356	38.61	PK3	35.9	-27.7	46.81	-	-	74	-27.19	-	-	7	190	V
	* 8.356	27.11	ADR	35.9	-27.7	35.31	54	-18.69	-	-	-	-	7	190	V
5	14.506	36.6	PK3	39.9	-26.1	50.4	-	-	-	-	68.2	-17.8	15	129	V
6	* 14.492	36.86	PK3	39.9	-26	50.76	-	-	74	-23.24	-	-	42	146	H
	* 14.495	25.41	ADR	39.9	-26	39.31	54	-14.69	-	-	-	-	42	146	H


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.17. 802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

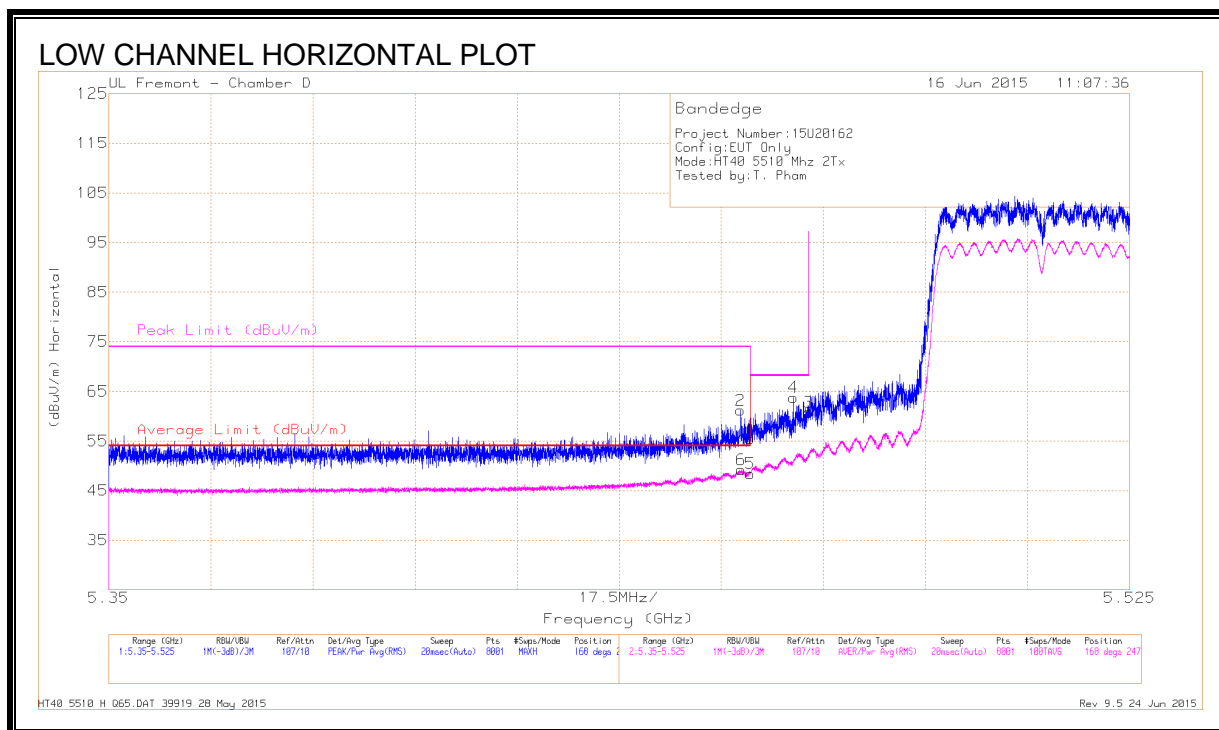


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.03	Pk	34.4	-18	55.43	-	-	74	-18.57	168	247	H
2	* 5.458	44.77	Pk	34.4	-18	61.17	-	-	74	-12.83	168	247	H
3	5.47	44.38	Pk	34.4	-18	60.78	-	-	68.2	-7.42	168	247	H
4	5.467	47.39	Pk	34.4	-18	63.79	-	-	68.2	-4.41	168	247	H
5	* 5.46	32.03	RMS	34.4	-18	48.43	54	-5.57	-	-	168	247	H
6	* 5.458	32.8	RMS	34.4	-18	49.2	54	-4.8	-	-	168	247	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

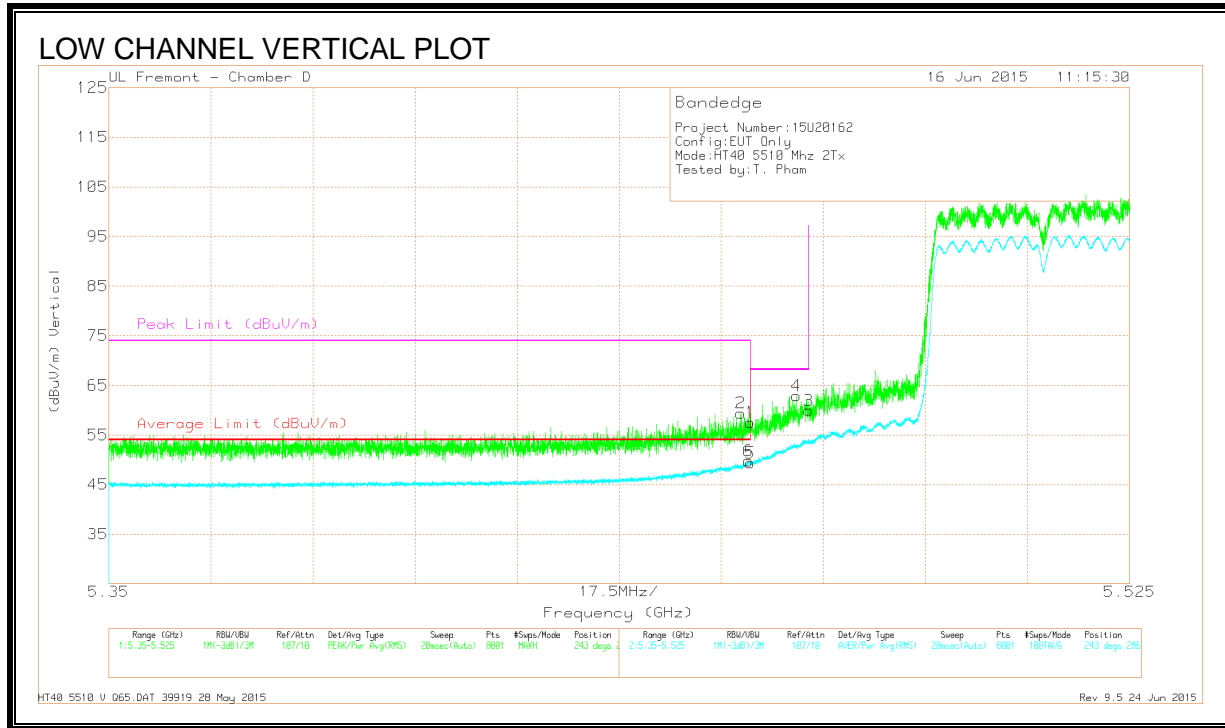

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.18	Pk	34.4	-18	57.58	-	-	74	-16.42	243	281	V
2	* 5.458	43.02	Pk	34.4	-18	59.42	-	-	74	-14.58	243	281	V
3	5.47	43.59	Pk	34.4	-18	59.99	-	-	68.2	-8.21	243	281	V
4	5.468	46.54	Pk	34.4	-18	62.94	-	-	68.2	-5.26	243	281	V
5	* 5.46	32.98	RMS	34.4	-18	49.38	54	-4.62	-	-	243	286	V
6	* 5.46	33.39	RMS	34.4	-18	49.79	54	-4.21	-	-	243	286	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEGE (HIGH CHANNEL)

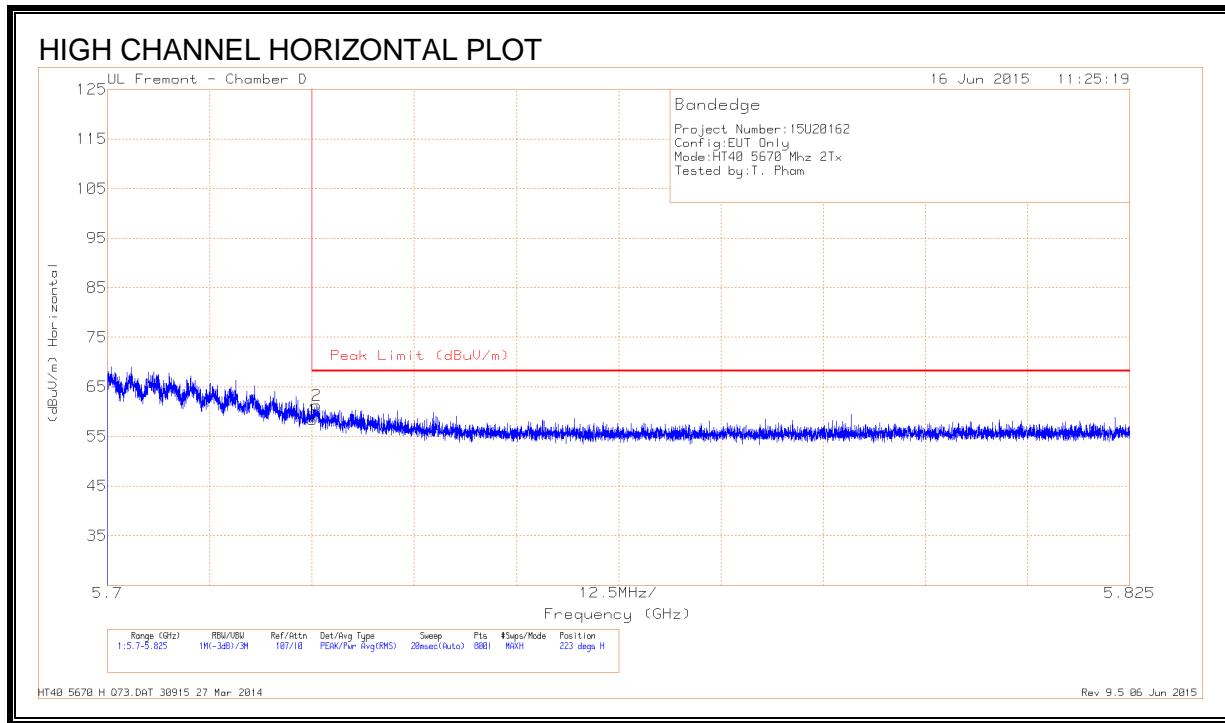


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Flt r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.34	Pk	34.6	-17.6	58.34	68.2	-9.86	223	281	H
2	5.726	44.26	Pk	34.6	-17.6	61.26	68.2	-6.94	223	281	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

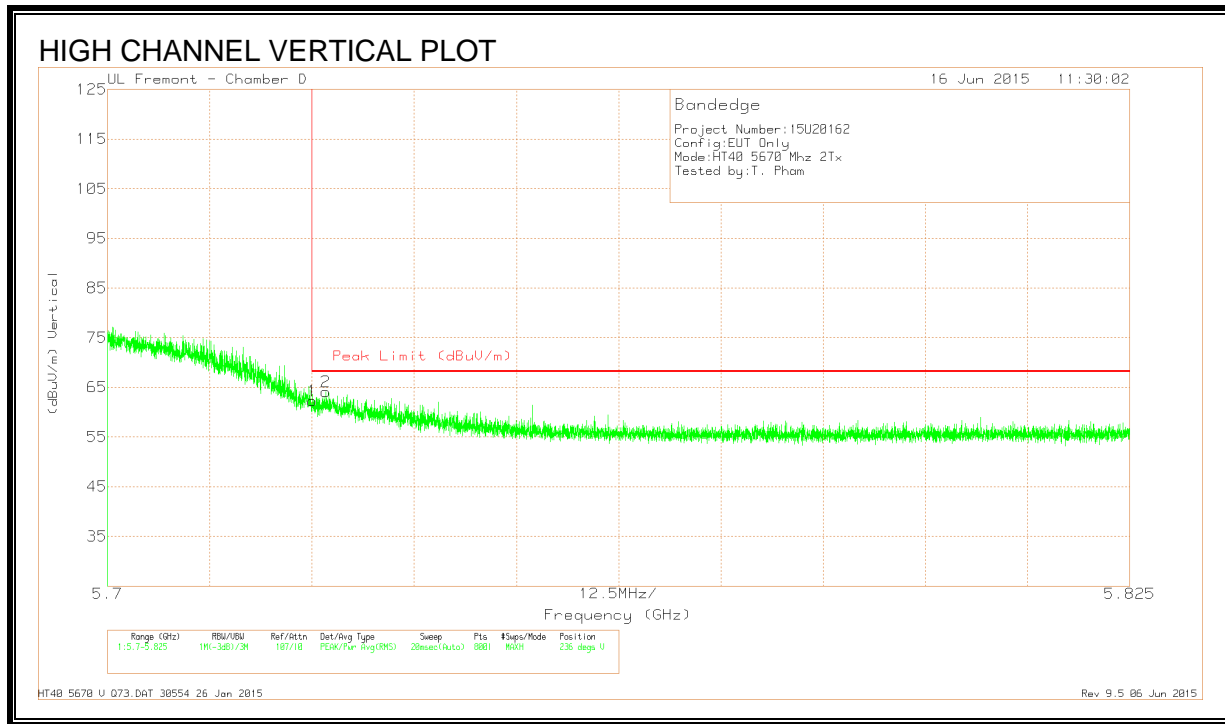



DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.33	Pk	34.6	-17.6	62.33	68.2	-5.87	236	117	V
2	5.727	47.11	Pk	34.6	-17.6	64.11	68.2	-4.09	236	117	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

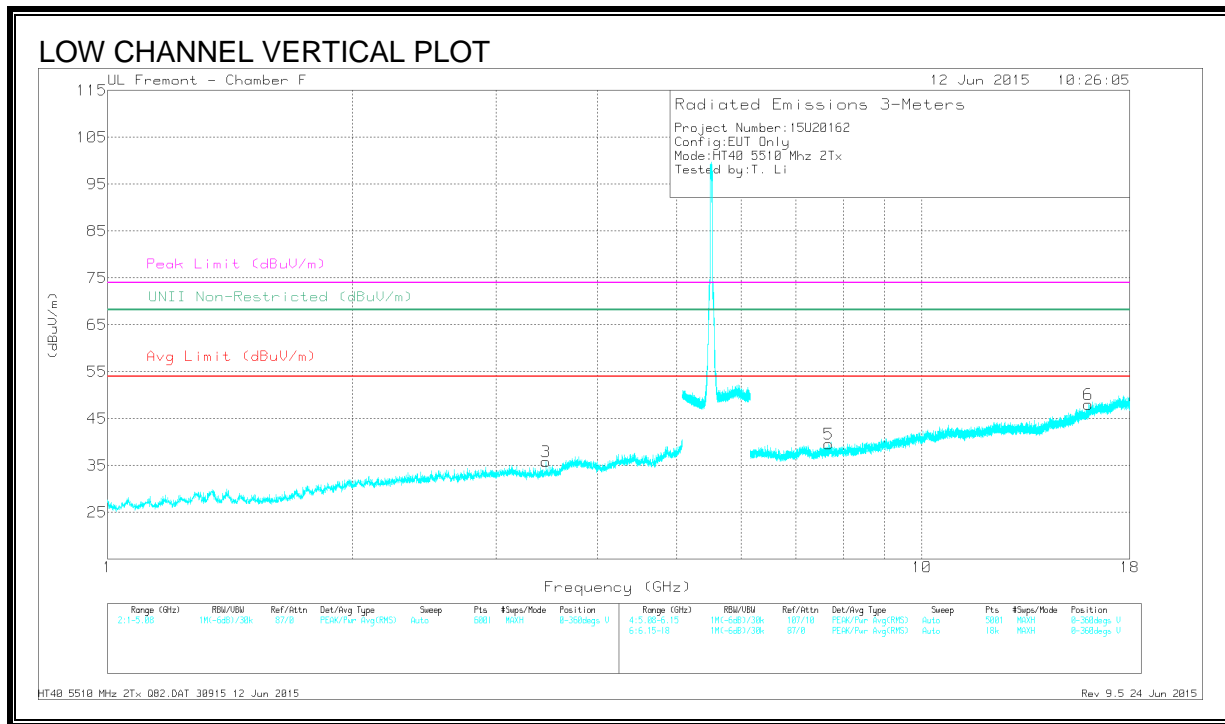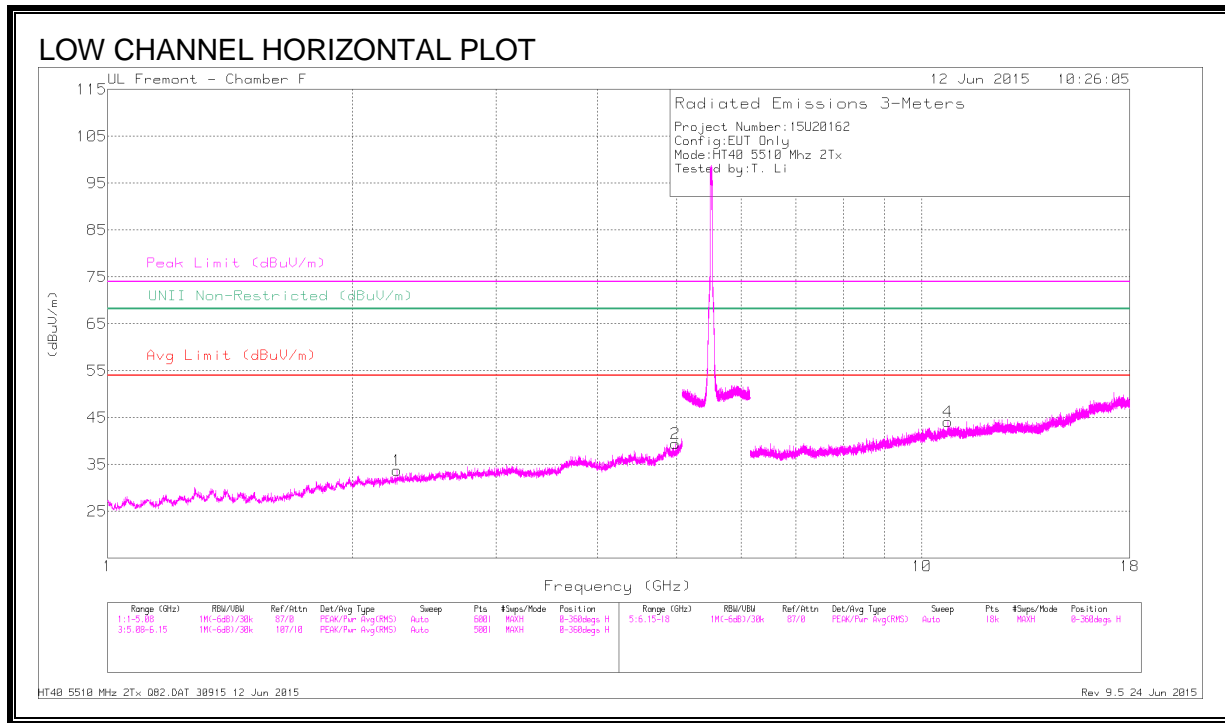

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.266	40.73	PK-U	31.9	-30.7	41.93	-	-	74	-32.07	-	-	239	202	H
	* 2.266	29.13	ADR	31.9	-30.7	30.33	54	-23.67	-	-	-	-	239	202	H
2	* 4.984	38.53	PK-U	34.2	-27	45.73	-	-	74	-28.27	-	-	85	141	H
	* 4.985	27.11	ADR	34.2	-27	34.31	54	-19.69	-	-	-	-	85	141	H
3	3.45	39.24	PK-U	32.8	-29	43.04	-	-	-	-	68.2	-25.16	245	110	V
4	* 10.754	34.53	PK-U	37.9	-21.1	51.33	-	-	74	-22.67	-	-	98	101	H
	* 10.756	23.39	ADR	37.9	-21	40.29	54	-13.71	-	-	-	-	98	101	H
5	* 7.687	37.31	PK-U	35.6	-25.1	47.81	-	-	74	-26.19	-	-	334	179	V
	* 7.687	25.81	ADR	35.6	-25.1	36.31	54	-17.69	-	-	-	-	334	179	V
6	* 16.007	35.61	PK-U	41.2	-21	55.81	-	-	74	-18.19	-	-	240	101	V
	* 16.007	24.47	ADR	41.2	-21	44.67	54	-9.33	-	-	-	-	240	101	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

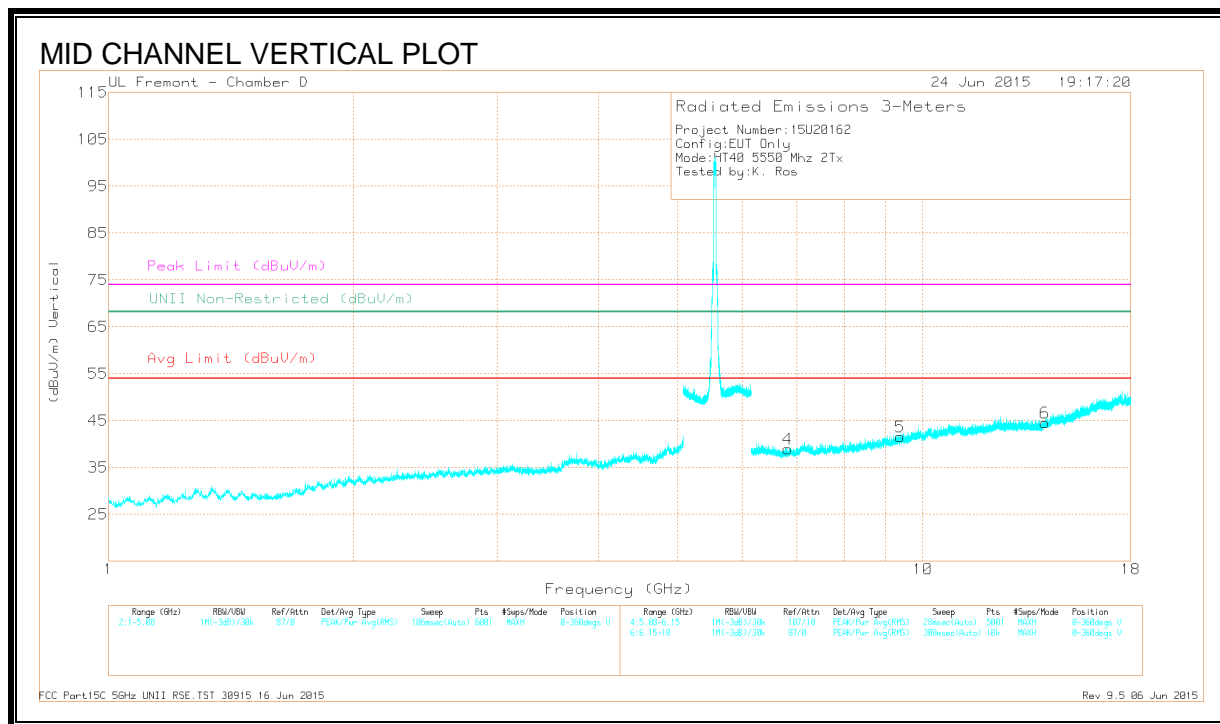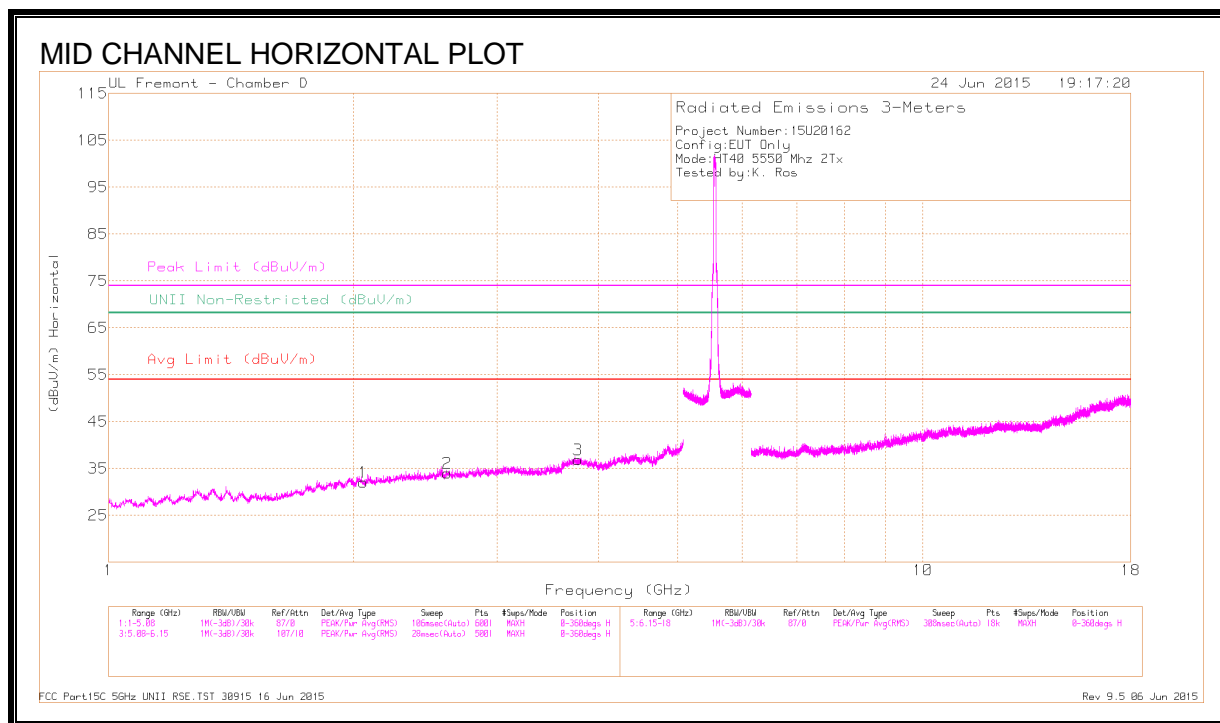

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/Filter/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.055	39.2	PK3	31.2	-30.6	39.8	-	-	-	-	68.2	-28.4	330	202	H
2	2.603	39.42	PK3	32.4	-29.9	41.92	-	-	-	-	68.2	-26.28	54	245	H
3	* 3.773	38.49	PK3	33.3	-28.9	42.89	-	-	74	-31.11	-	-	87	102	H
	* 3.771	27.29	ADR	33.3	-28.9	31.69	54	-22.31	-	-	-	-	87	102	H
4	6.82	36.42	PK3	35.5	-26.1	45.82	-	-	-	-	68.2	-22.38	180	200	V
5	* 9.376	34.77	PK3	36.4	-22.5	48.67	-	-	74	-25.33	-	-	195	113	V
	* 9.378	23.31	ADR	36.4	-22.4	37.31	54	-16.69	-	-	-	-	195	113	V
6	14.118	35.64	PK3	38.9	-23	51.54	-	-	-	-	68.2	-16.66	66	102	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

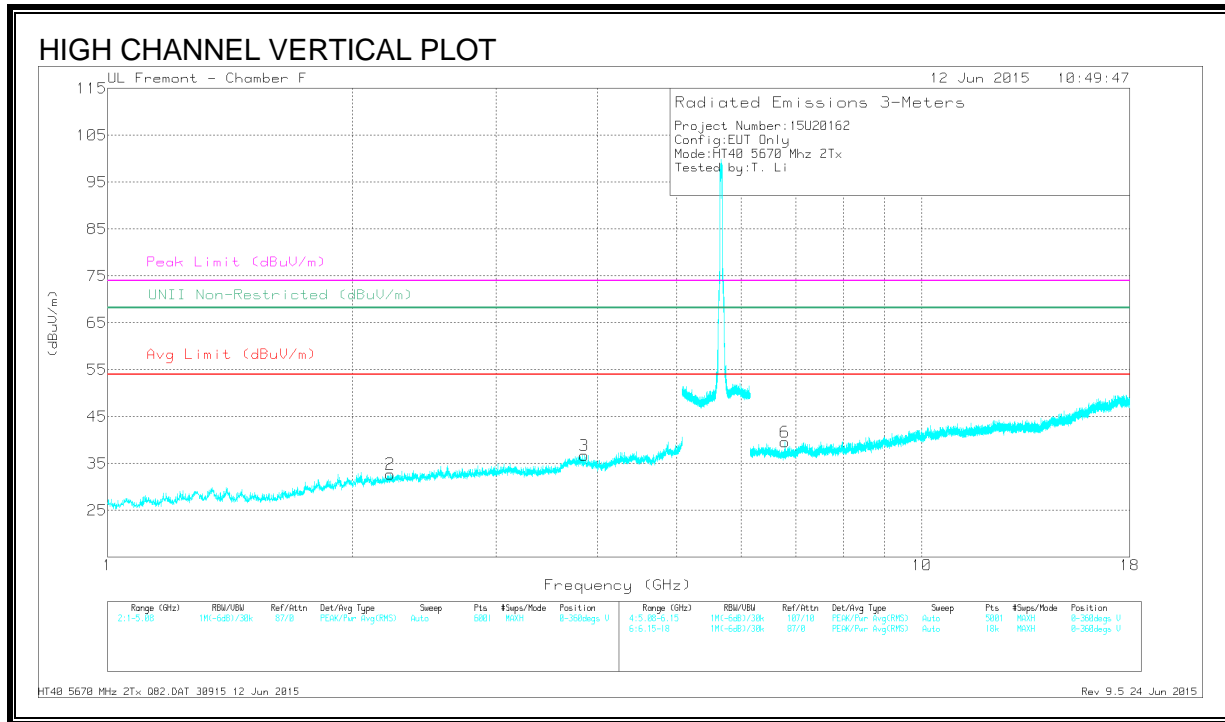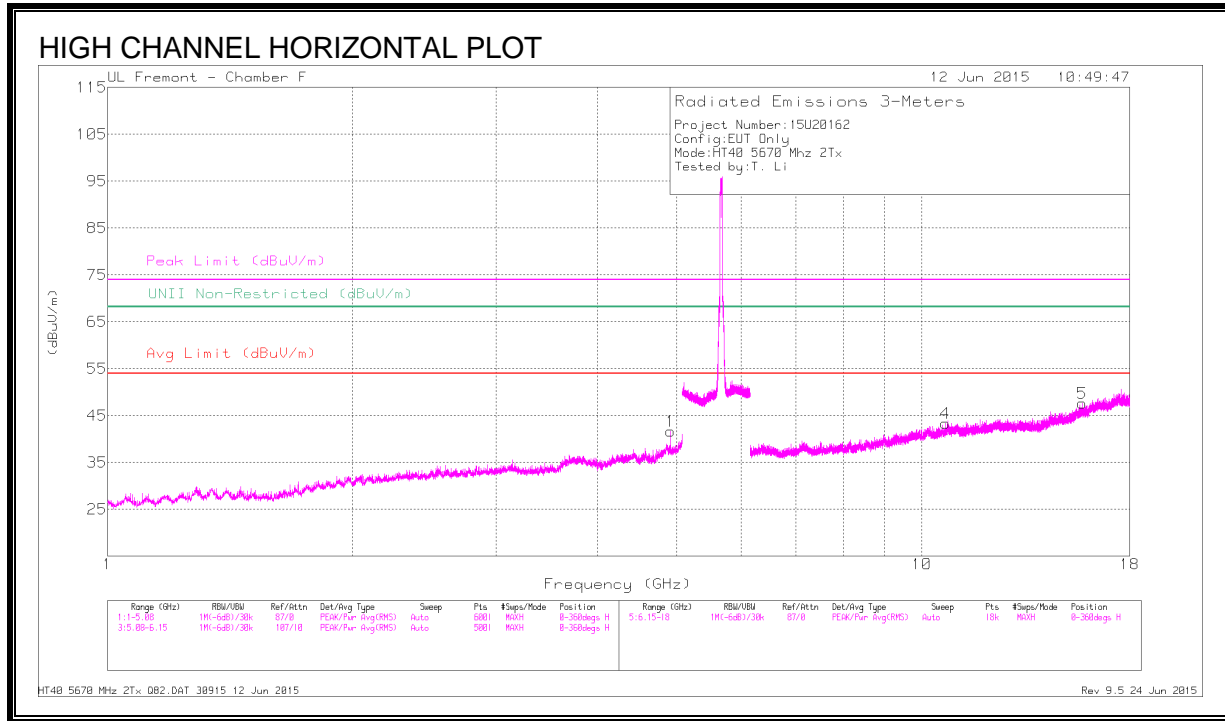

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.914	38.08	PK-U	34.1	-26.4	45.78	-	-	74	-28.22	-	-	239	201	H
	* 4.914	27.07	ADR	34.1	-26.4	34.77	54	-19.23	-	-	-	-	239	201	H
2	* 2.224	41.07	PK-U	31.7	-30.9	41.87	-	-	74	-32.13	-	-	180	101	V
	* 2.221	28.57	ADR	31.7	-31	29.27	54	-24.73	-	-	-	-	180	101	V
3	* 3.848	38.84	PK-U	33.4	-28.9	43.34	-	-	74	-30.66	-	-	153	211	V
	* 3.848	27.8	ADR	33.4	-28.9	32.3	54	-21.7	-	-	-	-	153	211	V
4	* 10.692	34.65	PK-U	37.9	-22	50.55	-	-	74	-23.45	-	-	85	201	H
	* 10.693	23.07	ADR	37.9	-22	38.97	54	-15.03	-	-	-	-	85	201	H
5	* 15.727	35.28	PK-U	40.8	-21.1	54.98	-	-	74	-19.02	-	-	235	245	H
	* 15.728	24.72	ADR	40.8	-21	44.52	54	-9.48	-	-	-	-	235	245	H
6	6.787	37.64	PK-U	35.5	-26.3	46.84	-	-	-	-	68.2	-21.36	325	201	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS

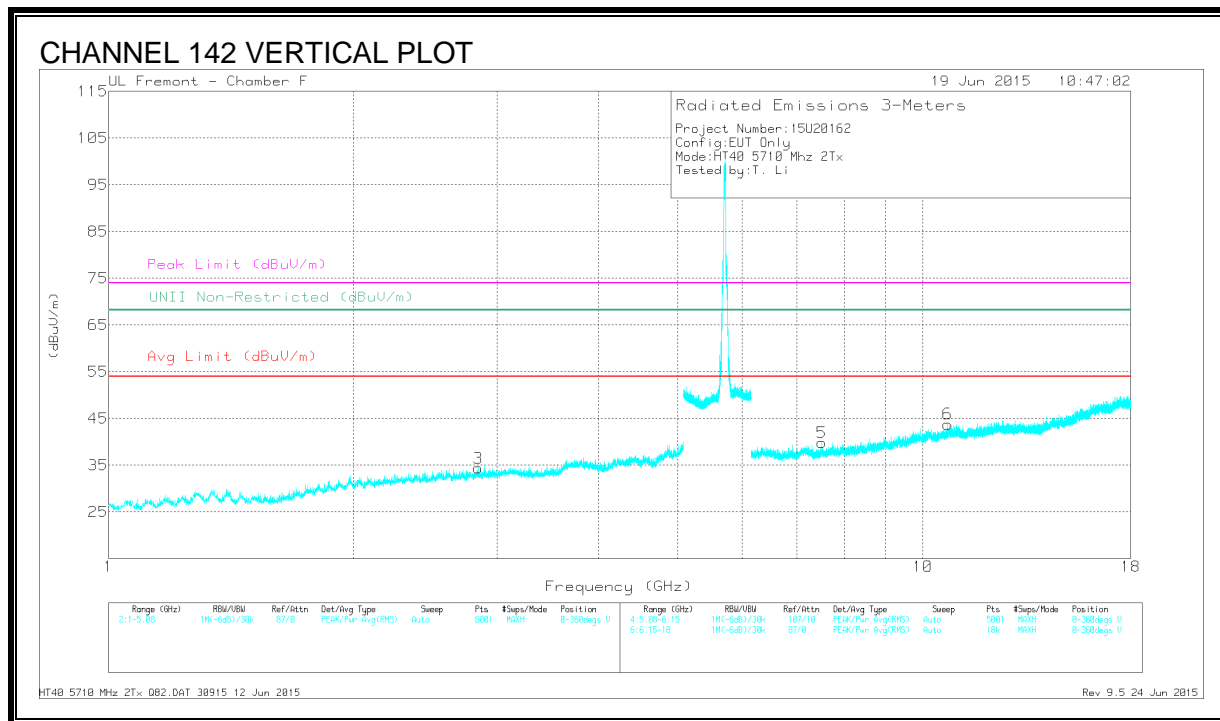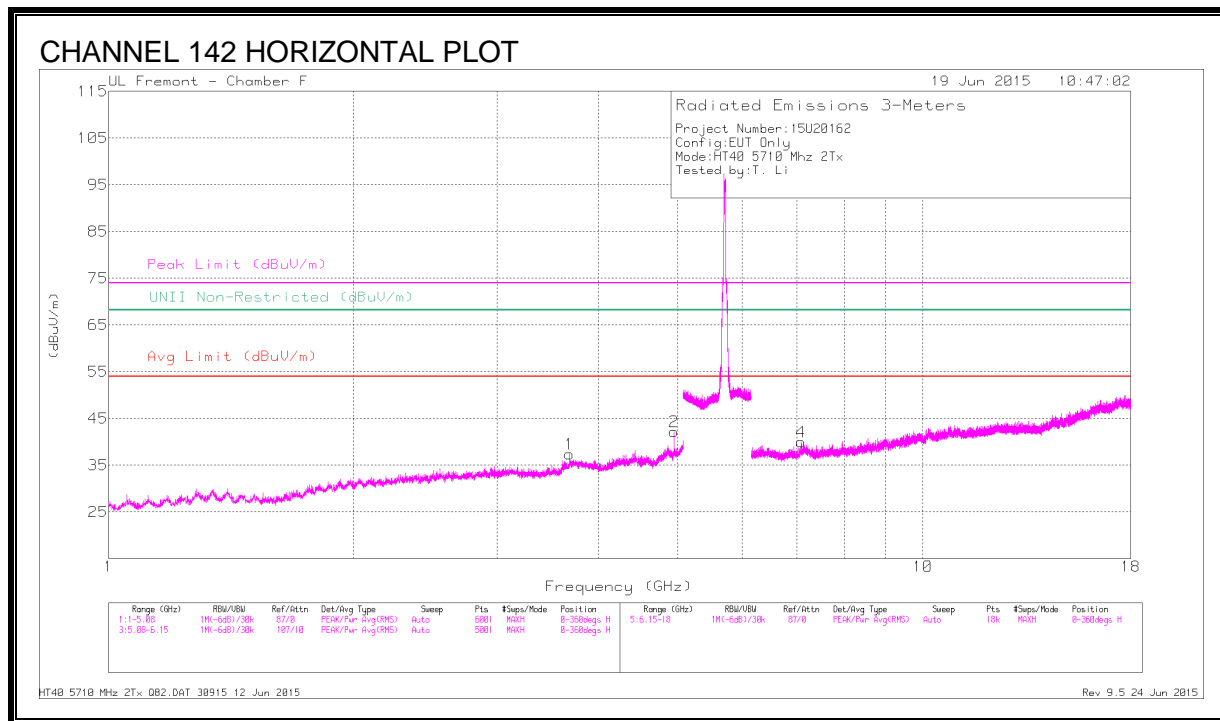

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.68	38.51	PK-U	33.2	-29.2	42.51	-	-	74	-31.49	-	-	245	221	H
	* 3.679	27.41	ADR	33.2	-29.2	31.41	54	-22.59	-	-	-	-	245	221	H
2	* 4.947	38.62	PK-U	34.2	-26.9	45.92	-	-	74	-28.08	-	-	39	185	H
	* 4.949	27.36	ADR	34.2	-26.9	34.66	54	-19.34	-	-	-	-	39	185	H
3	* 2.842	39.5	PK-U	32.5	-29.3	42.7	-	-	74	-31.3	-	-	184	201	V
	* 2.843	28	ADR	32.5	-29.3	31.2	54	-22.8	-	-	-	-	184	201	V
4	7.088	37.24	PK-U	35.5	-25.1	47.64	-	-	-	-	68.2	-20.56	239	201	H
5	* 7.514	37.04	PK-U	35.5	-24.5	48.04	-	-	74	-25.96	-	-	321	102	V
	* 7.515	25.2	ADR	35.5	-24.5	36.2	54	-17.8	-	-	-	-	321	102	V
6	* 10.721	34.11	PK-U	37.9	-21.8	50.21	-	-	74	-23.79	-	-	354	105	V
	* 10.721	23.23	ADR	37.9	-21.8	39.33	54	-14.67	-	-	-	-	354	105	V


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.18. 802.11ac VHT80 1Tx MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL)

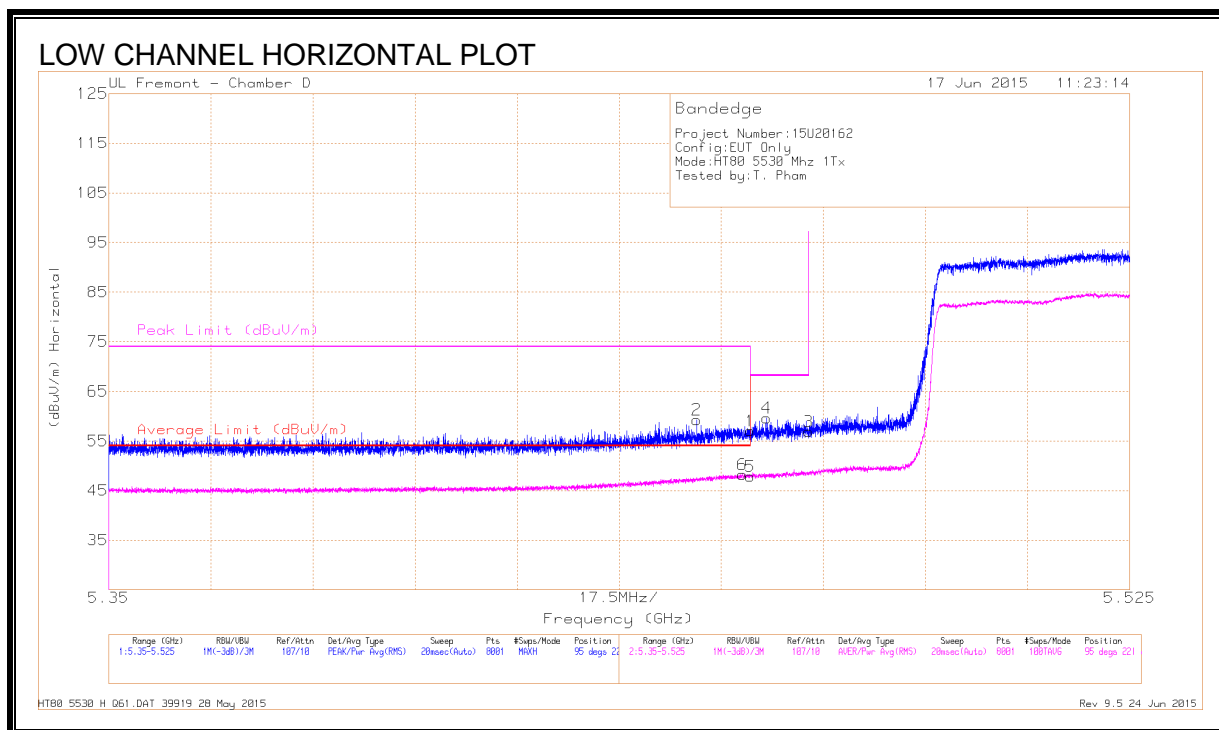


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.64	Pk	34.4	-18	0	57.04	-	-	74	-16.96	95	221	H
2	* 5.451	42.98	Pk	34.4	-18.1	0	59.28	-	-	74	-14.72	95	221	H
3	5.47	40.49	Pk	34.4	-18	0	56.89	-	-	68.2	-11.31	95	221	H
4	5.463	43.15	Pk	34.4	-17.9	0	59.65	-	-	68.2	-8.55	95	221	H
5	* 5.46	31.49	RMS	34.4	-18	.18	48.07	54	-5.93	-	-	95	221	H
6	* 5.459	31.85	RMS	34.4	-18	.18	48.43	54	-5.57	-	-	95	221	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

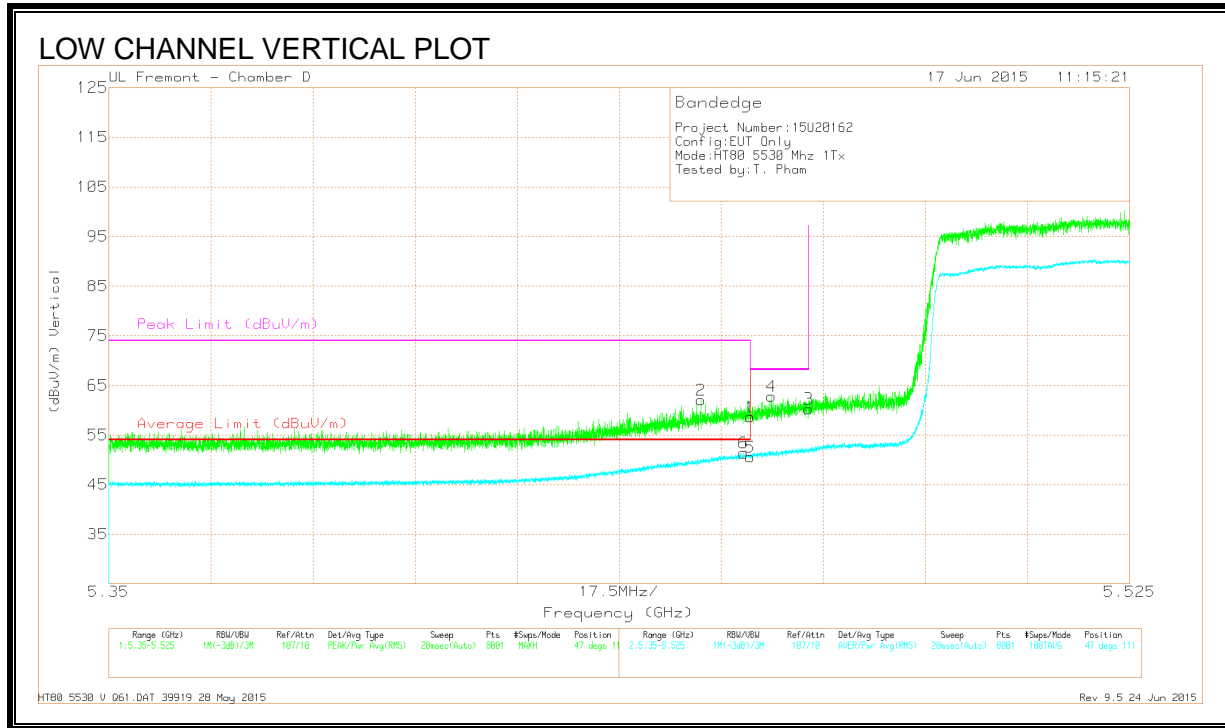

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.21	Pk	34.4	-18	0	58.61	-	-	74	-15.39	47	111	V
2	* 5.452	45.75	Pk	34.4	-18.1	0	62.05	-	-	74	-11.95	47	111	V
3	5.47	43.85	Pk	34.4	-18	0	60.25	-	-	68.2	-7.95	47	111	V
4	5.464	46.4	Pk	34.4	-18	0	62.8	-	-	68.2	-5.4	47	111	V
5	* 5.46	34	RMS	34.4	-18	.18	50.58	54	-3.42	-	-	47	111	V
6	* 5.459	34.81	RMS	34.4	-18	.18	51.39	54	-2.61	-	-	47	111	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

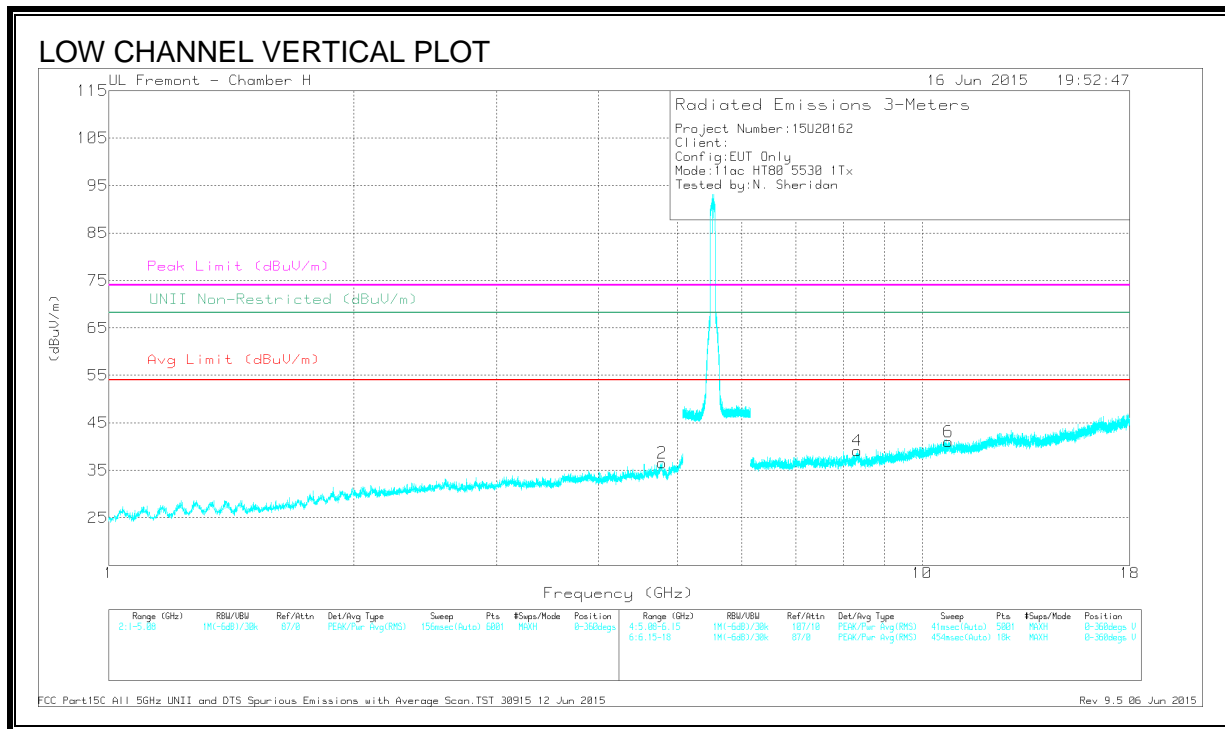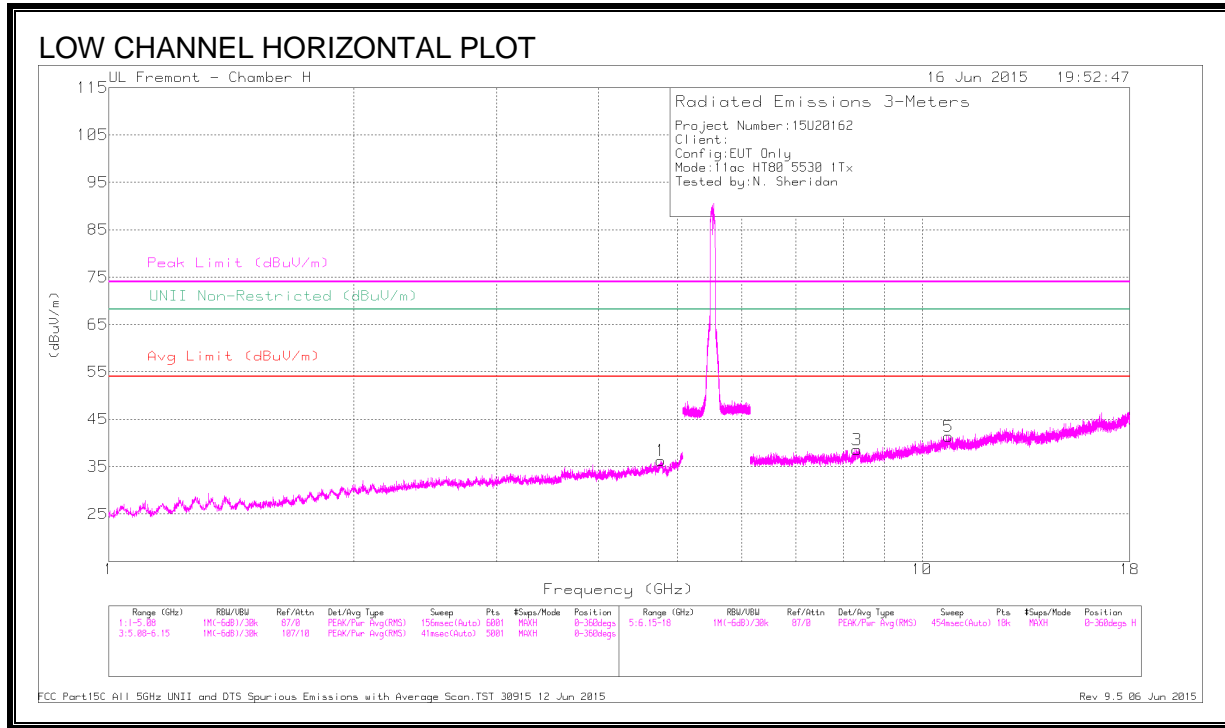

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.771	41.73	PK3	34.2	-31.8	0	44.13	-	-	74	-29.87	-	-	33	347	H
	* 4.774	30.35	ADR	34.2	-31.8	.18	32.93	54	-21.07	-	-	-	-	33	347	H
2	* 4.788	41.58	PK3	34.2	-32	0	43.78	-	-	74	-30.22	-	-	88	100	V
	* 4.787	30.78	ADR	34.2	-32	.18	33.16	54	-20.84	-	-	-	-	88	100	V
3	* 8.317	37.67	PK3	35.9	-27.2	0	46.37	-	-	74	-27.63	-	-	125	168	H
	* 8.317	26.19	ADR	35.9	-27.2	.18	35.07	54	-18.93	-	-	-	-	125	168	H
4	* 8.328	37.28	PK3	35.9	-27.5	0	45.68	-	-	74	-28.32	-	-	98	201	V
	* 8.325	26.78	ADR	35.9	-27.5	.18	35.36	54	-18.64	-	-	-	-	98	201	V
5	* 10.779	35.73	PK3	37.9	-24.6	0	49.03	-	-	74	-24.97	-	-	325	100	H
	* 10.778	24.22	ADR	37.9	-24.6	.18	37.70	54	-16.30	-	-	-	-	325	100	H
6	* 10.778	35.66	PK3	37.9	-24.6	0	48.96	-	-	74	-25.04	-	-	125	201	V
	* 10.777	24.49	ADR	37.9	-24.7	.18	37.87	54	-16.13	-	-	-	-	125	201	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

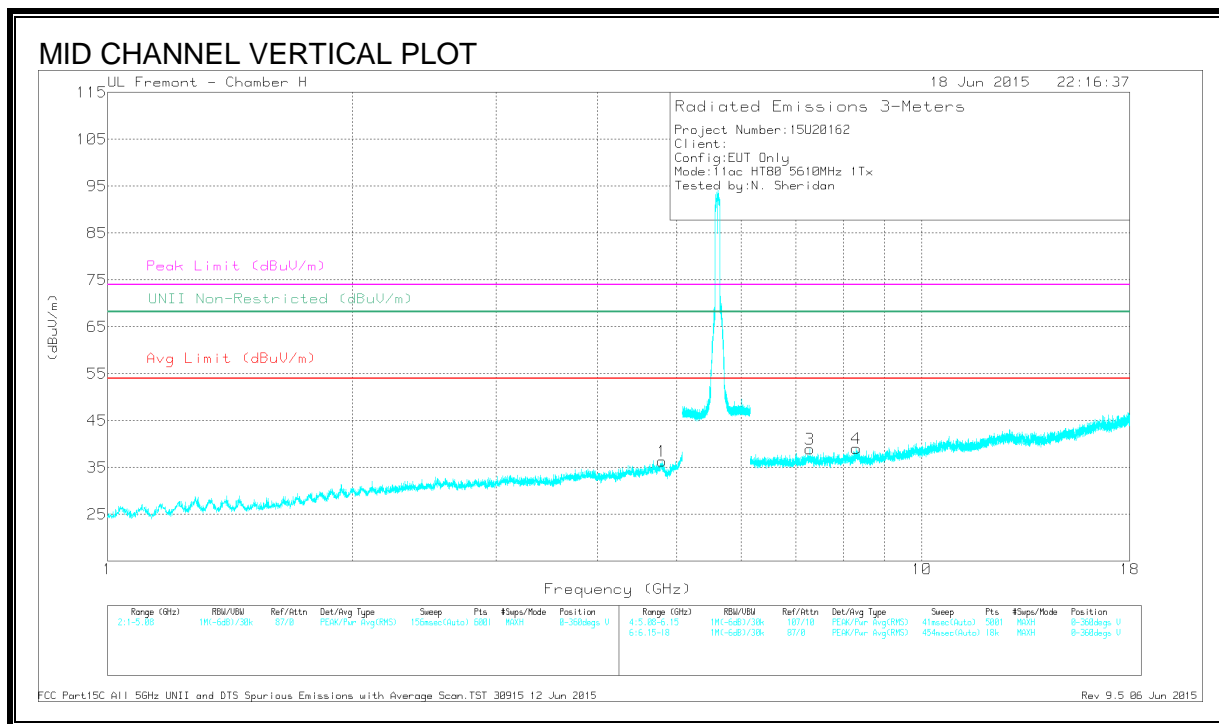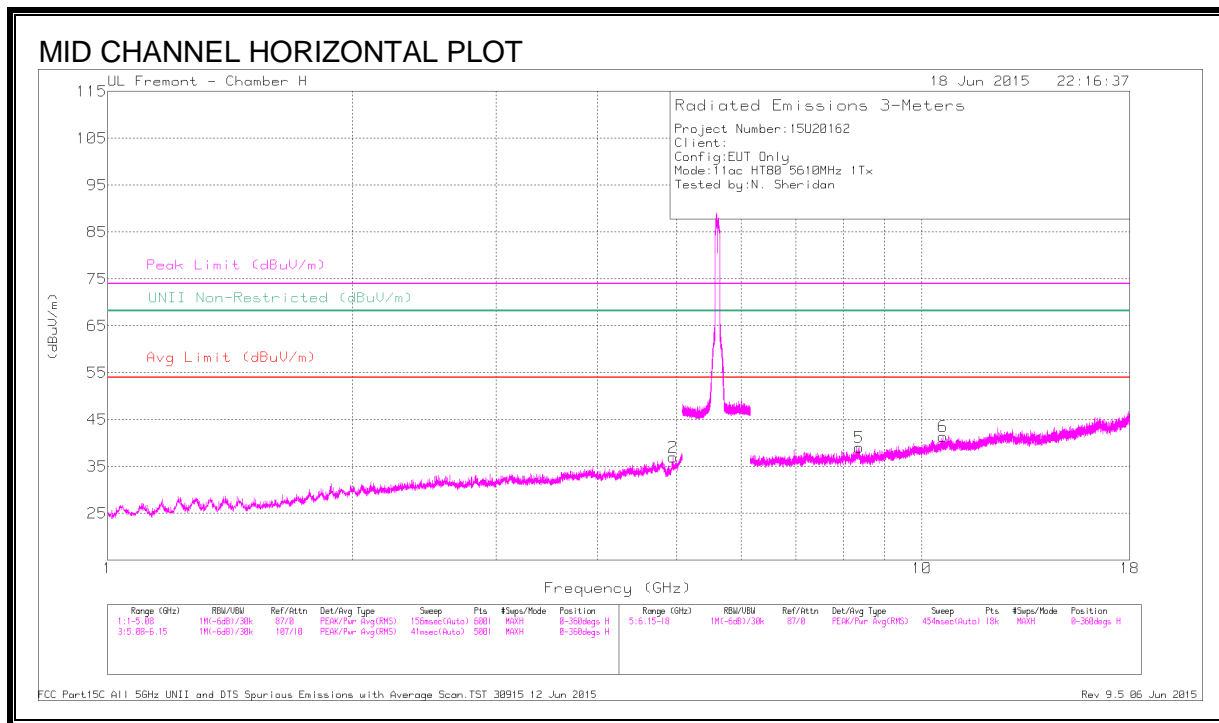

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.796	41.65	PK3	34.2	-32.1	0	43.75	-	-	74	-30.25	-	-	10	119	V
	* 4.795	30.66	ADR	34.2	-32.1	.18	32.94	54	-21.06	-	-	-	-	10	119	V
2	* 4.944	40.31	PK3	34.2	-30.9	0	43.61	-	-	74	-30.39	-	-	19	114	H
	* 4.942	28.97	ADR	34.2	-30.9	.18	32.45	54	-21.55	-	-	-	-	19	114	H
3	* 7.285	39.27	PK3	35.9	-29.5	0	45.67	-	-	74	-28.33	-	-	13	119	V
	* 7.285	28.13	ADR	35.9	-29.5	.18	34.8	54	-19.2	-	-	-	-	13	119	V
4	* 8.31	38.29	PK3	35.9	-27.1	0	47.09	-	-	74	-26.91	-	-	178	105	V
	* 8.308	26.68	ADR	35.9	-27.2	.18	35.56	54	-18.44	-	-	-	-	178	105	V
5	* 8.365	37.93	PK3	35.9	-27.9	0	45.93	-	-	74	-28.07	-	-	187	146	H
	* 8.364	27.09	ADR	35.9	-27.9	.18	35.27	54	-18.73	-	-	-	-	187	146	H
6	* 10.616	36.12	PK3	37.7	-25.2	0	48.62	-	-	74	-25.38	-	-	176	108	H
	* 10.618	24.95	ADR	37.7	-25.2	.18	37.63	54	-16.37	-	-	-	-	176	108	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS

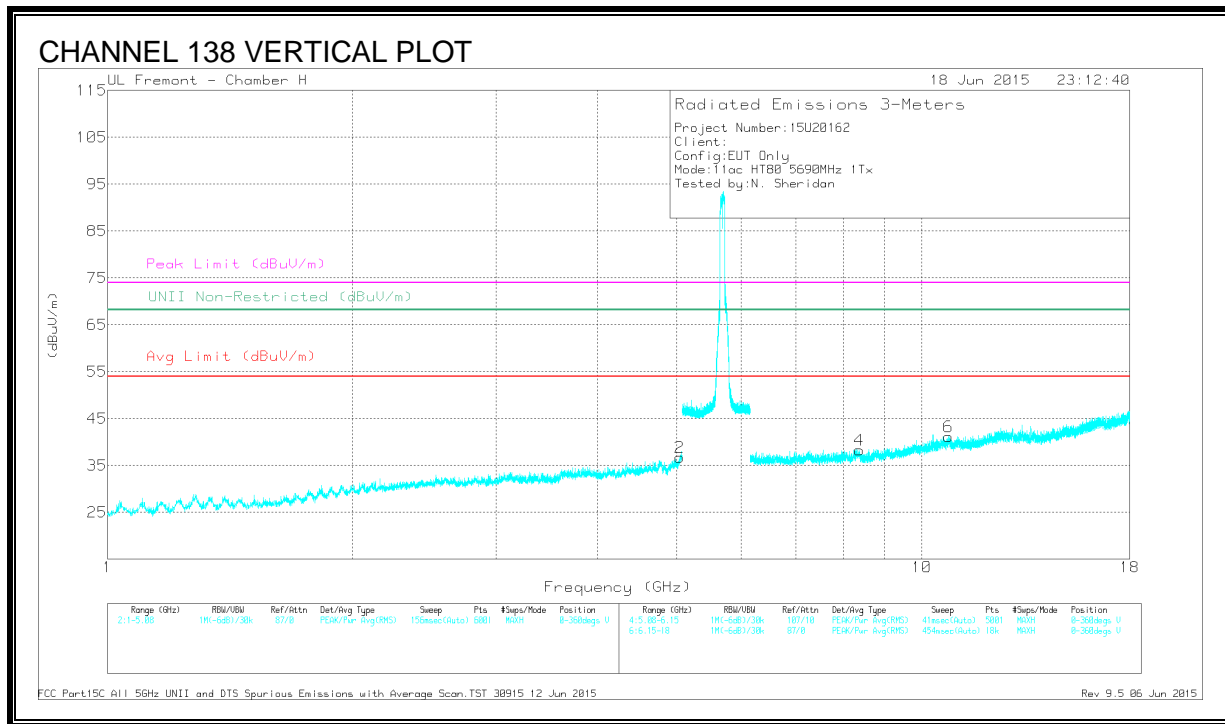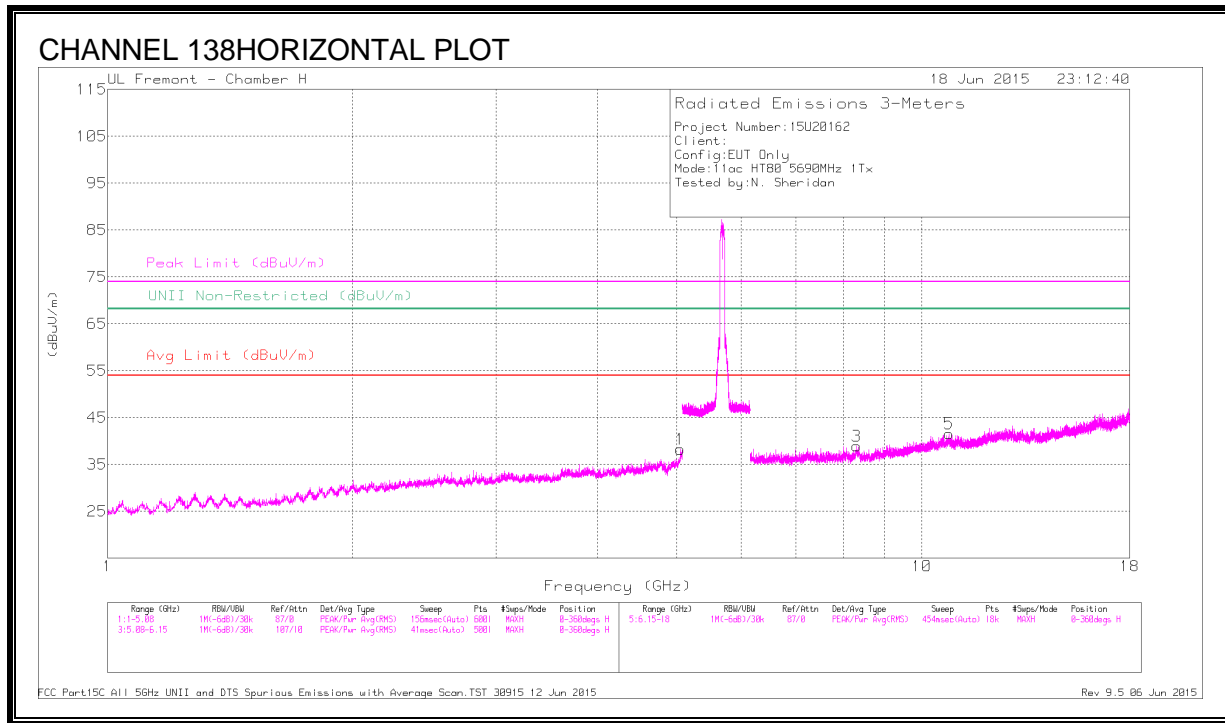

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.051	40.42	PK3	34.3	-29.7	0	45.02	-	-	74	-28.98	-	-	37	113	H
	* 5.051	29.23	ADR	34.3	-29.7	.18	34.01	54	-19.99	-	-	-	-	37	113	H
2	* 5.038	40.78	PK3	34.3	-30.6	0	44.48	-	-	74	-29.52	-	-	17	105	V
	* 5.037	29.65	ADR	34.3	-30.6	.18	33.53	54	-20.46	-	-	-	-	17	105	V
3	* 8.313	37.52	PK3	35.9	-27.1	0	46.32	-	-	74	-27.68	-	-	184	185	H
	* 8.31	26.7	ADR	35.9	-27.1	.18	35.69	54	-18.31	-	-	-	-	184	185	H
4	* 8.381	38.8	PK3	35.9	-27.9	0	46.8	-	-	74	-27.2	-	-	172	181	V
	* 8.379	27.29	ADR	35.9	-27.8	.18	35.57	54	-18.43	-	-	-	-	172	181	V
5	* 10.791	35.28	PK3	37.9	-24.5	0	48.68	-	-	74	-25.32	-	-	13	220	H
	* 10.789	24.33	ADR	37.9	-24.4	.18	38.01	54	-15.99	-	-	-	-	13	220	H
6	* 10.78	36.49	PK3	37.9	-24.5	0	49.89	-	-	74	-24.11	-	-	15	110	V
	* 10.779	24.51	ADR	37.9	-24.6	.18	37.99	54	-16.01	-	-	-	-	15	110	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

RESTRICTED BANDEDGE, CHAIN 1 (LOW CHANNEL)

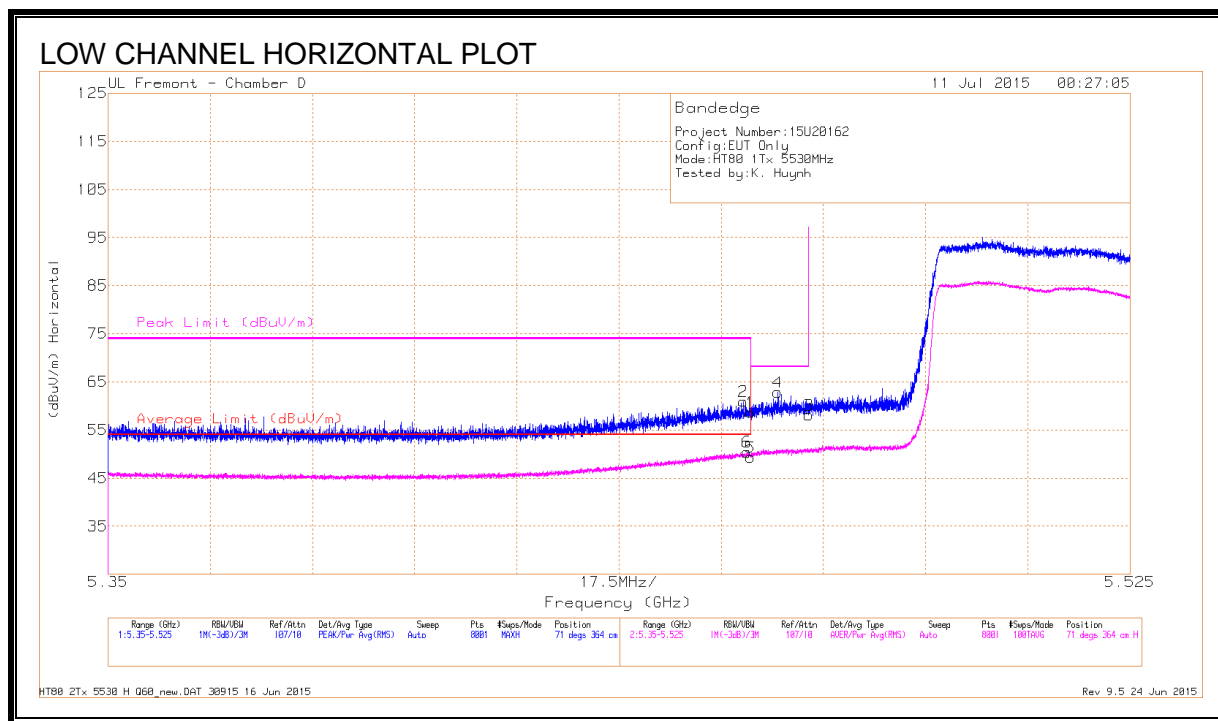


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.459	47.75	Pk	34.6	-21.4	0	60.95	-	-	74	-13.05	71	364	H
6	* 5.459	36.93	RMS	34.6	-21.3	.18	50.41	54	-3.59	-	-	71	364	H
1	* 5.46	45.34	Pk	34.6	-21.3	0	58.64	-	-	74	-15.36	71	364	H
5	* 5.46	35.85	RMS	34.6	-21.3	.18	49.33	54	-4.67	-	-	71	364	H
4	5.465	49.55	Pk	34.6	-21.3	0	62.85	-	-	68.2	-5.35	71	364	H
3	5.47	44.83	Pk	34.6	-21.3	0	58.13	-	-	68.2	-10.07	71	364	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

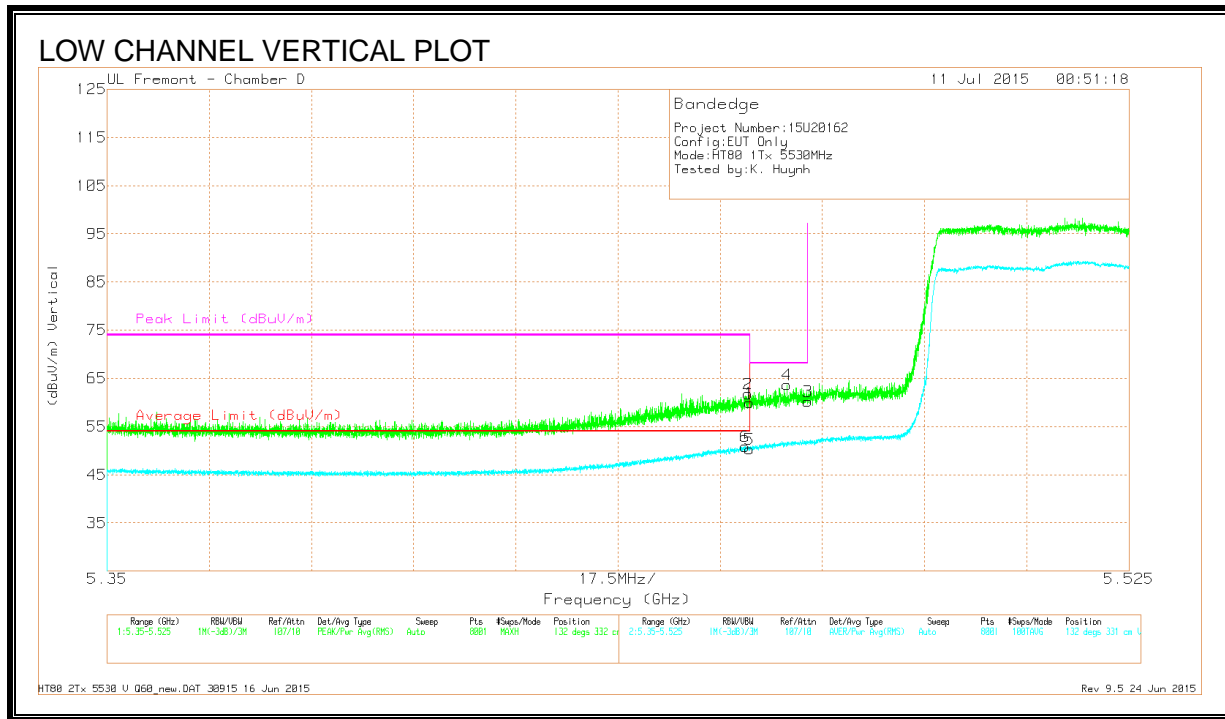

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.459	37.46	RMS	34.6	-21.4	.18	50.84	54	-3.16	-	-	132	331	V
1	* 5.46	46.64	Pk	34.6	-21.3	0	59.94	-	-	74	-14.06	132	332	V
2	* 5.46	48.49	Pk	34.6	-21.3	0	61.79	-	-	74	-12.21	132	332	V
5	* 5.46	36.8	RMS	34.6	-21.3	.18	50.28	54	-3.72	-	-	132	331	V
4	5.466	50.34	Pk	34.6	-21.3	0	63.64	-	-	68.2	-4.56	132	332	V
3	5.47	46.92	Pk	34.6	-21.3	0	60.22	-	-	68.2	-7.98	132	332	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

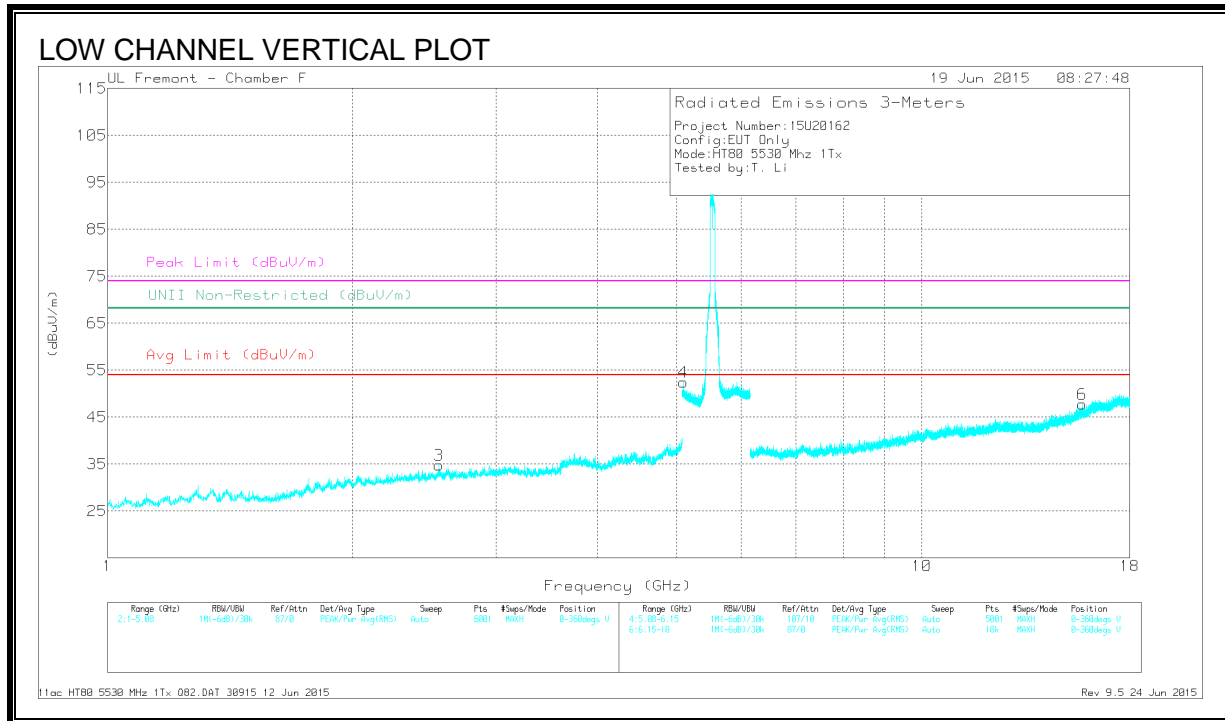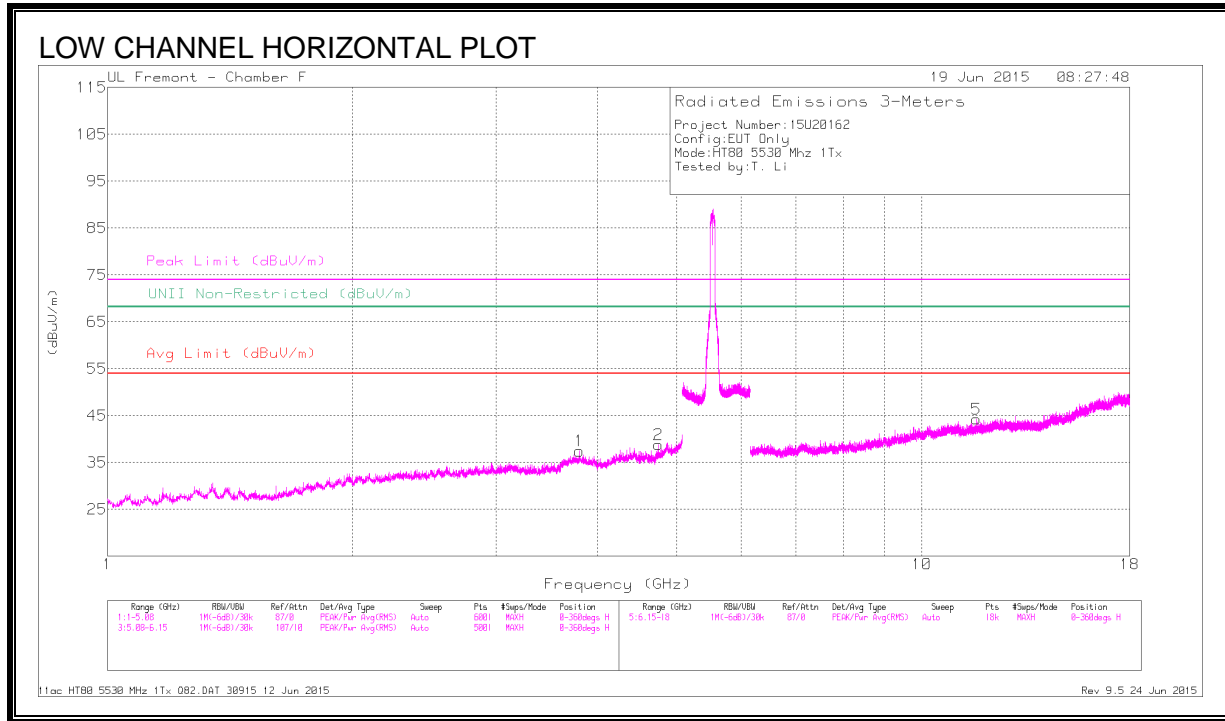

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.798	39	PK-U	33.3	-28.7	0	43.6	-	-	74	-30.4	-	-	134	158	H
	* 3.798	27.81	ADR	33.3	-28.7	.18	32.59	54	-21.41	-	-	-	-	134	158	H
2	* 4.748	38.47	PK-U	34.1	-27.6	0	44.97	-	-	74	-29.03	-	-	144	123	H
	* 4.746	27.4	ADR	34.1	-27.6	.18	34.08	54	-19.92	-	-	-	-	144	123	H
3	2.553	40.58	PK-U	32.3	-29.8	0	43.08	-	-	-	-	68.2	-25.12	125	131	V
4	* 5.097	42.22	PK-U	34.2	-18.4	0	58.02	-	-	74	-15.98	-	-	193	200	V
	* 5.098	30.59	ADR	34.2	-18.4	.18	46.57	54	-7.43	-	-	-	-	193	200	V
5	* 11.675	34.84	PK-U	38.2	-21.3	0	51.74	-	-	74	-22.26	-	-	201	145	H
	* 11.676	23.38	ADR	38.2	-21.3	.18	40.46	54	-13.54	-	-	-	-	201	145	H
6	* 15.748	35.36	PK-U	40.9	-20.8	0	55.46	-	-	74	-18.54	-	-	176	112	V
	* 15.749	24.79	ADR	40.9	-20.8	.18	45.07	54	-8.93	-	-	-	-	176	112	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

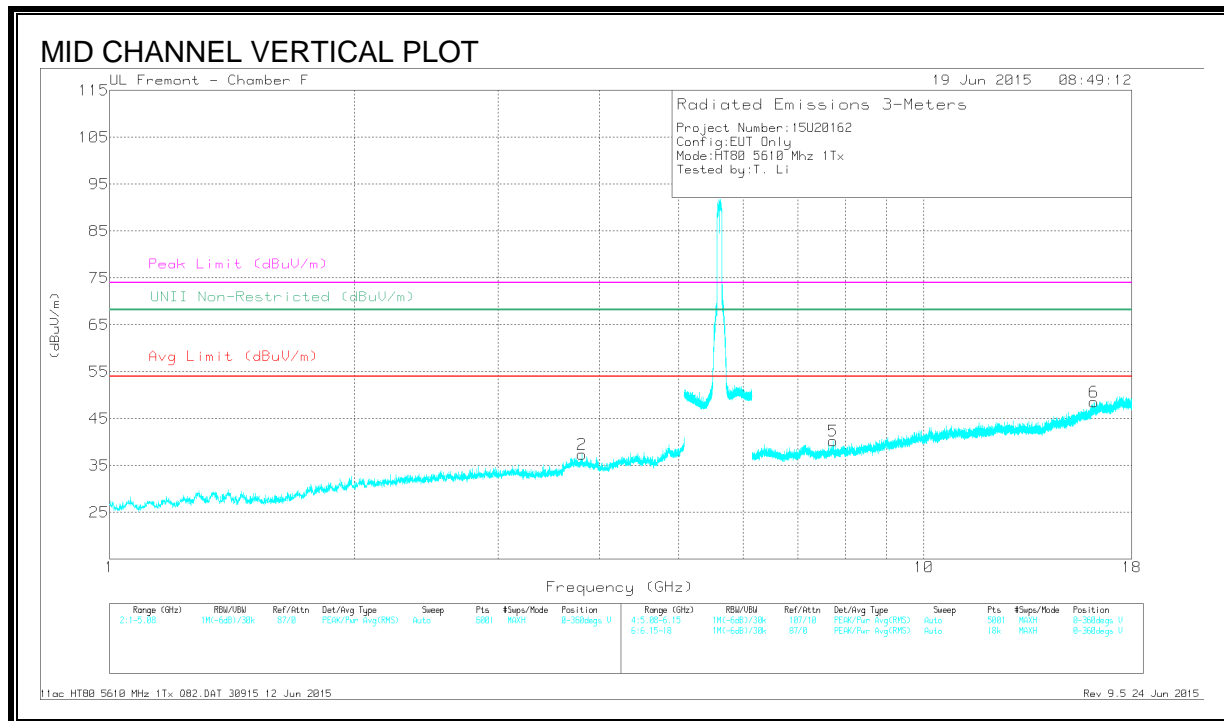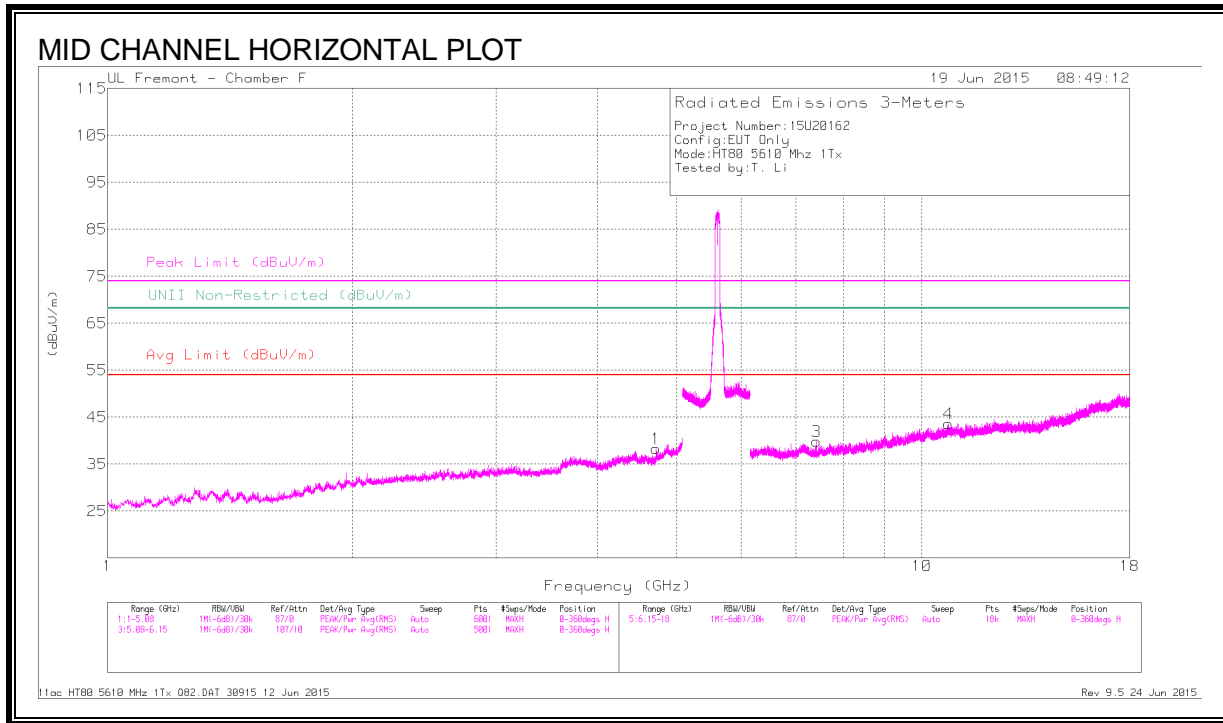

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.718	38.27	PK-U	34.2	-28.1	0	44.37	-	-	74	-29.63	-	-	200	197	H
	* 4.719	27.42	ADR	34.2	-28	.18	33.8	54	-20.2	-	-	-	-	200	197	H
2	* 3.8	38.97	PK-U	33.3	-28.7	0	43.57	-	-	74	-30.43	-	-	226	159	V
	* 3.801	28	ADR	33.3	-28.6	.18	32.88	54	-21.12	-	-	-	-	226	159	V
3	* 7.425	37.12	PK-U	35.5	-25.2	0	47.42	-	-	74	-26.58	-	-	141	142	H
	* 7.425	26.04	ADR	35.5	-25.2	.18	36.52	54	-17.48	-	-	-	-	141	142	H
4	* 10.781	34.26	PK-U	37.9	-21	0	51.16	-	-	74	-22.84	-	-	91	182	H
	* 10.779	23.33	ADR	37.9	-21	.18	40.41	54	-13.59	-	-	-	-	91	182	H
5	* 7.738	37.09	PK-U	35.6	-24.2	0	48.49	-	-	74	-25.51	-	-	123	214	V
	* 7.739	25.85	ADR	35.6	-24.2	.18	37.43	54	-16.57	-	-	-	-	123	214	V
6	* 16.17	36.1	PK-U	41.4	-20.1	0	57.4	-	-	74	-16.6	-	-	118	108	V
	* 16.17	23.61	ADR	41.4	-20.1	.18	45.09	54	-8.91	-	-	-	-	118	108	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS

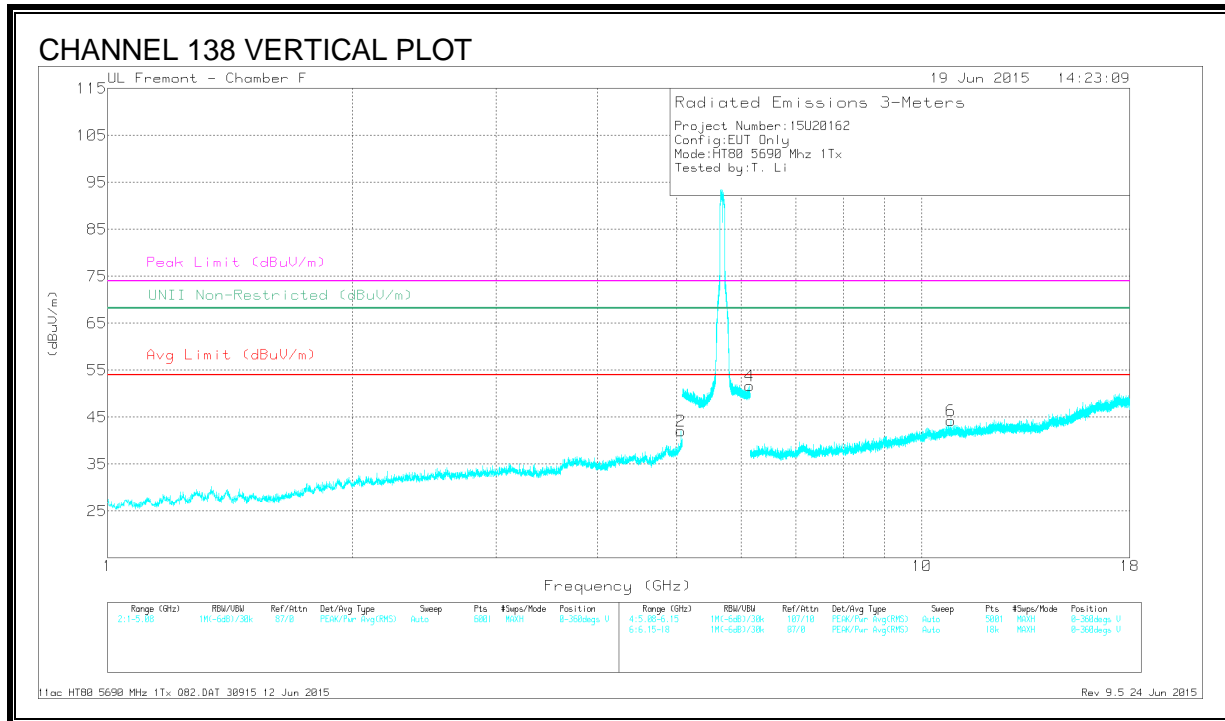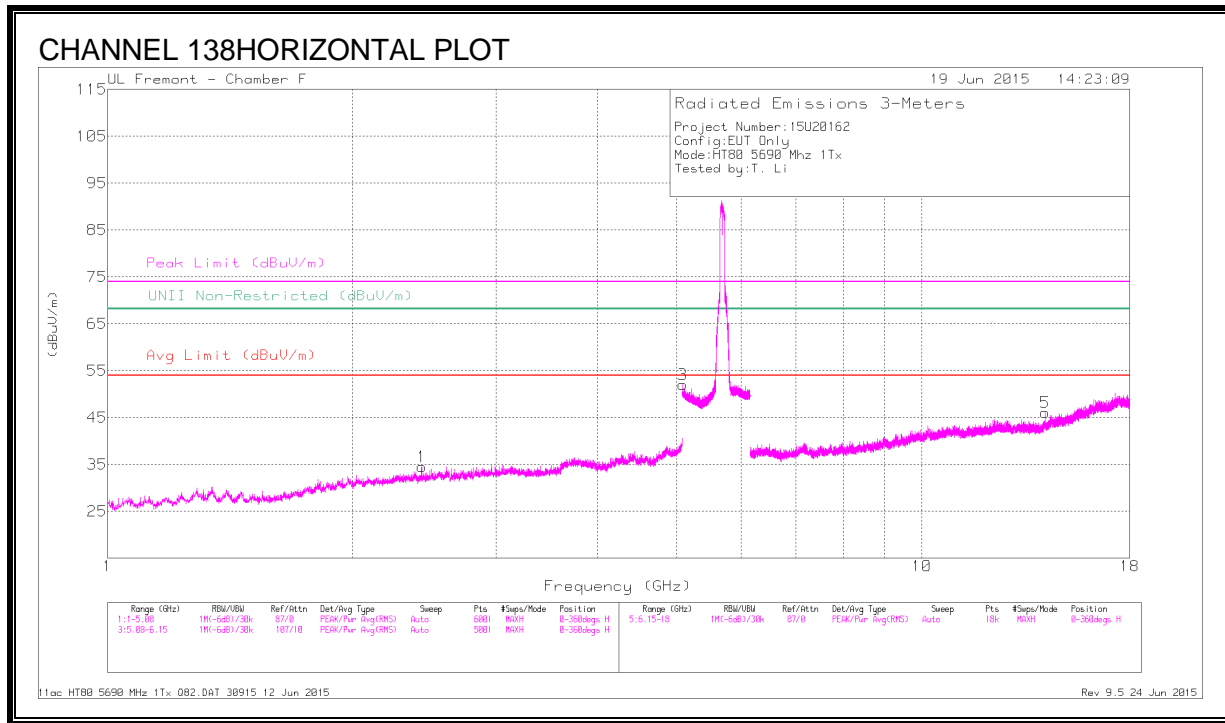

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.429	40.59	PK-U	32.1	-30.8	0	41.89	-	-	-	-	68.2	-26.31	178	230	H
2	* 5.059	38.66	PK-U	34.3	-25.9	0	47.06	-	-	74	-26.94	-	-	202	168	V
	* 5.058	27.47	ADR	34.3	-25.9	.18	36.05	54	-17.95	-	-	-	-	202	168	V
3	* 5.086	41.88	PK-U	34.2	-18.3	0	57.78	-	-	74	-16.22	-	-	98	176	H
	* 5.083	31.09	ADR	34.2	-18.3	.18	47.17	54	-6.83	-	-	-	-	98	176	H
4	6.146	40.82	PK-U	35.5	-17.6	0	58.72	-	-	-	-	68.2	-9.48	205	124	V
5	14.159	36.96	PK-U	39	-22.6	0	53.36	-	-	-	-	68.2	-14.84	109	237	H
6	* 10.849	34.38	PK-U	38	-21.5	0	50.88	-	-	74	-23.12	-	-	152	118	V
	* 10.848	23.07	ADR	38	-21.5	.18	39.75	54	-14.25	-	-	-	-	152	118	V


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.19. 802.11ac VHT80 2Tx CDD MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

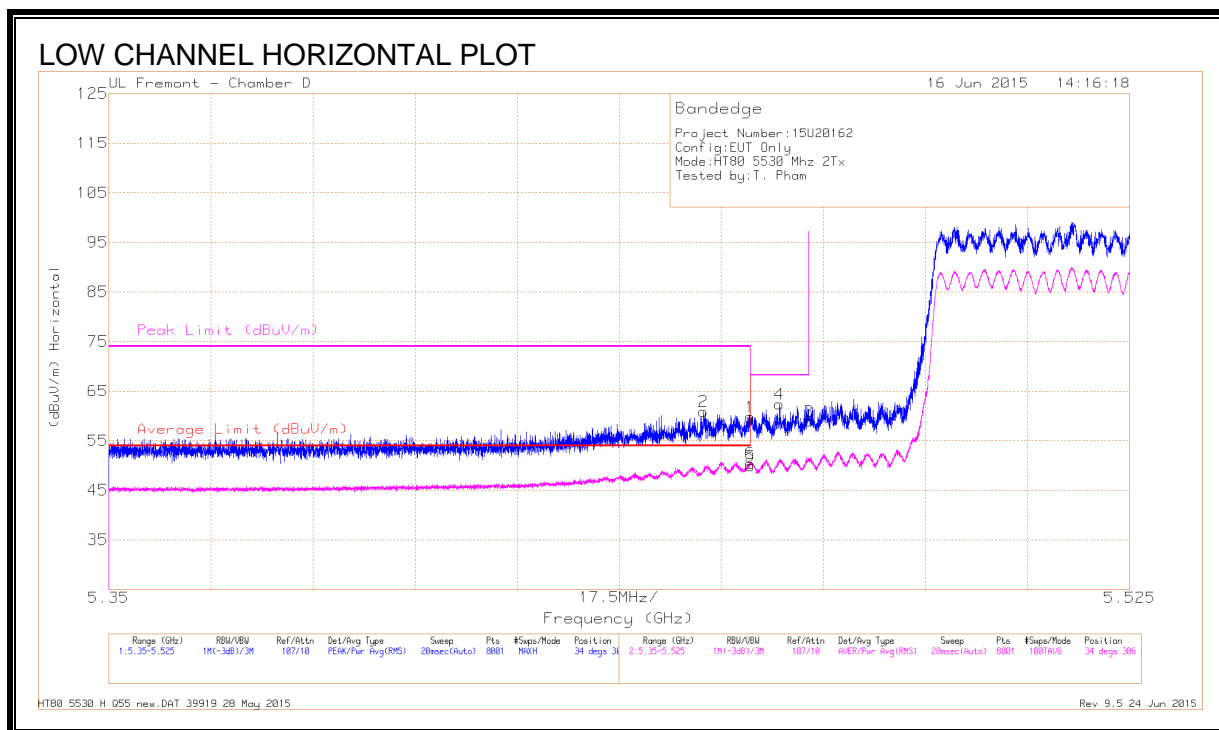


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	43.36	Pk	34.4	-18	0	59.76	-	-	74	-14.24	34	306	H
2	* 5.452	44.61	Pk	34.4	-18.1	0	60.91	-	-	74	-13.09	34	306	H
3	5.47	42.55	Pk	34.4	-18	0	58.95	-	-	68.2	-9.25	34	306	H
4	5.465	45.95	Pk	34.4	-18	0	62.35	-	-	68.2	-5.85	34	306	H
5	* 5.46	33.51	RMS	34.4	-18	.21	50.12	54	-3.88	-	-	34	306	H
6	* 5.46	34.04	RMS	34.4	-21.3	.21	50.71	54	-3.29	-	-	34	306	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

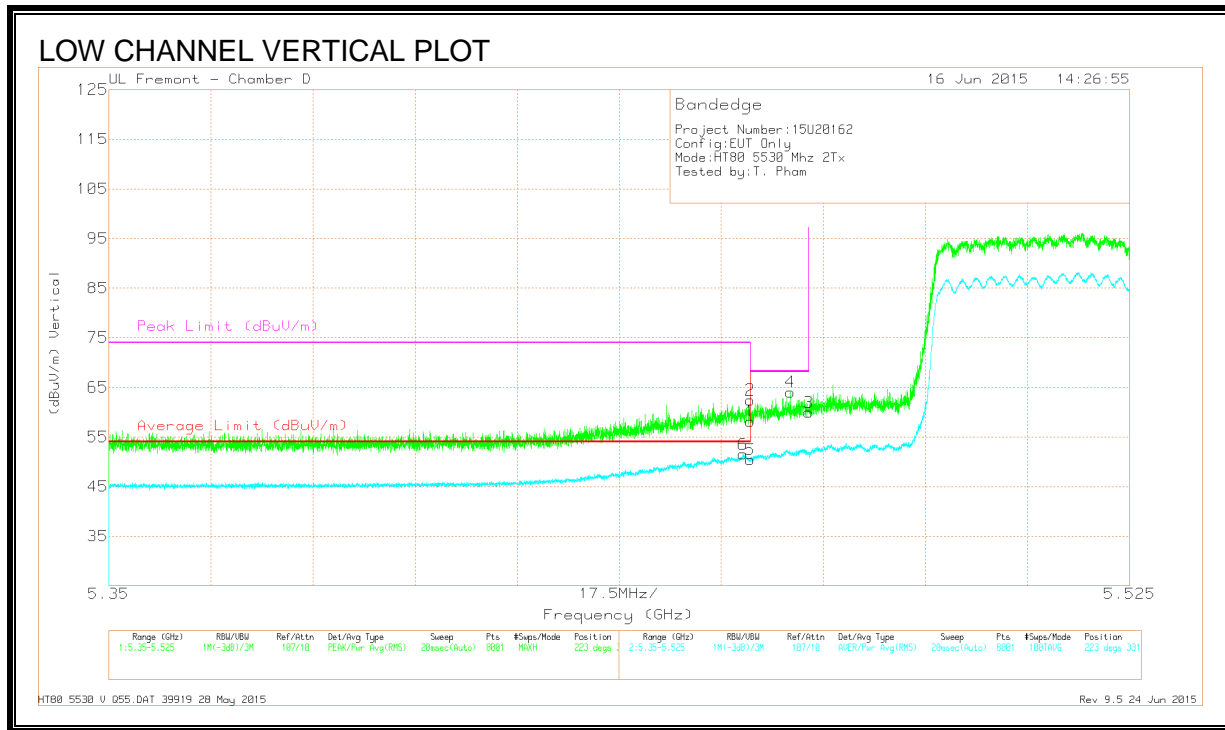

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.81	Pk	34.4	-18	0	58.21	-	-	74	-15.79	223	331	V
2	* 5.46	46.05	Pk	34.4	-18	0	62.45	-	-	74	-11.55	223	331	V
3	5.47	43.58	Pk	34.4	-18	0	59.98	-	-	68.2	-8.22	223	331	V
4	5.467	47.67	Pk	34.4	-18	0	64.07	-	-	68.2	-4.13	223	331	V
5	* 5.46	33.85	RMS	34.4	-18	.21	50.46	54	-3.54	-	-	223	331	V
6	* 5.459	34.92	RMS	34.4	-18	.21	51.53	54	-2.47	-	-	223	331	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

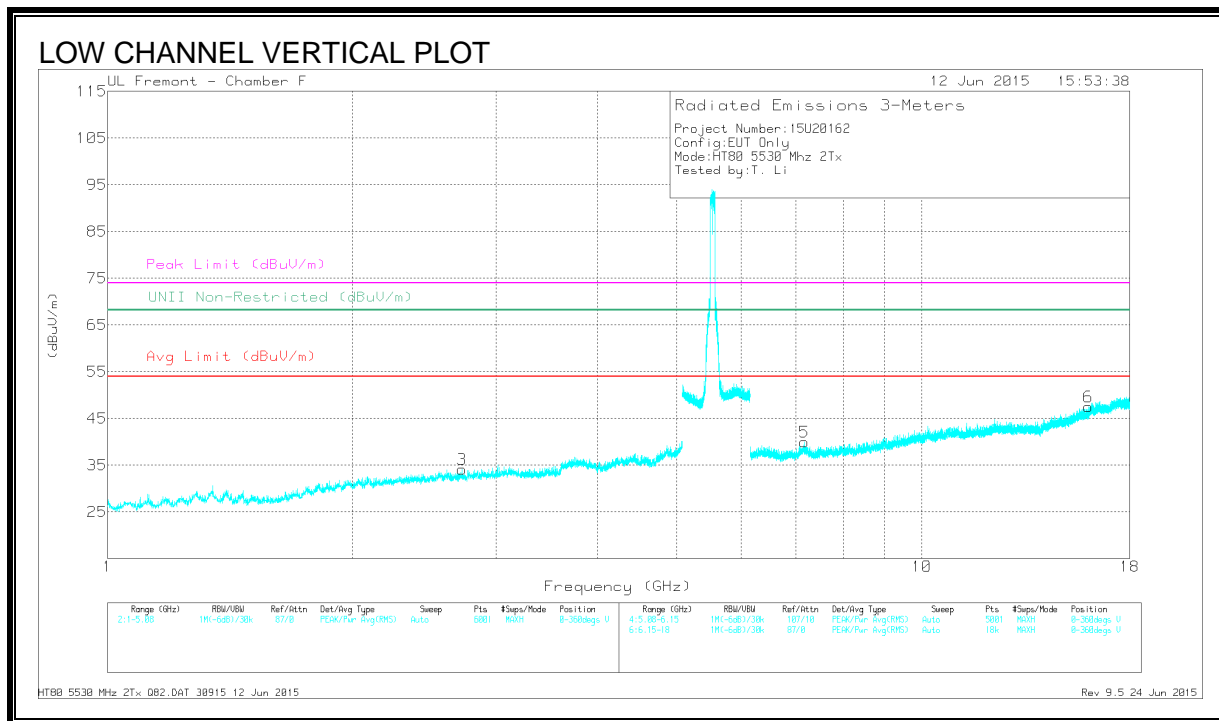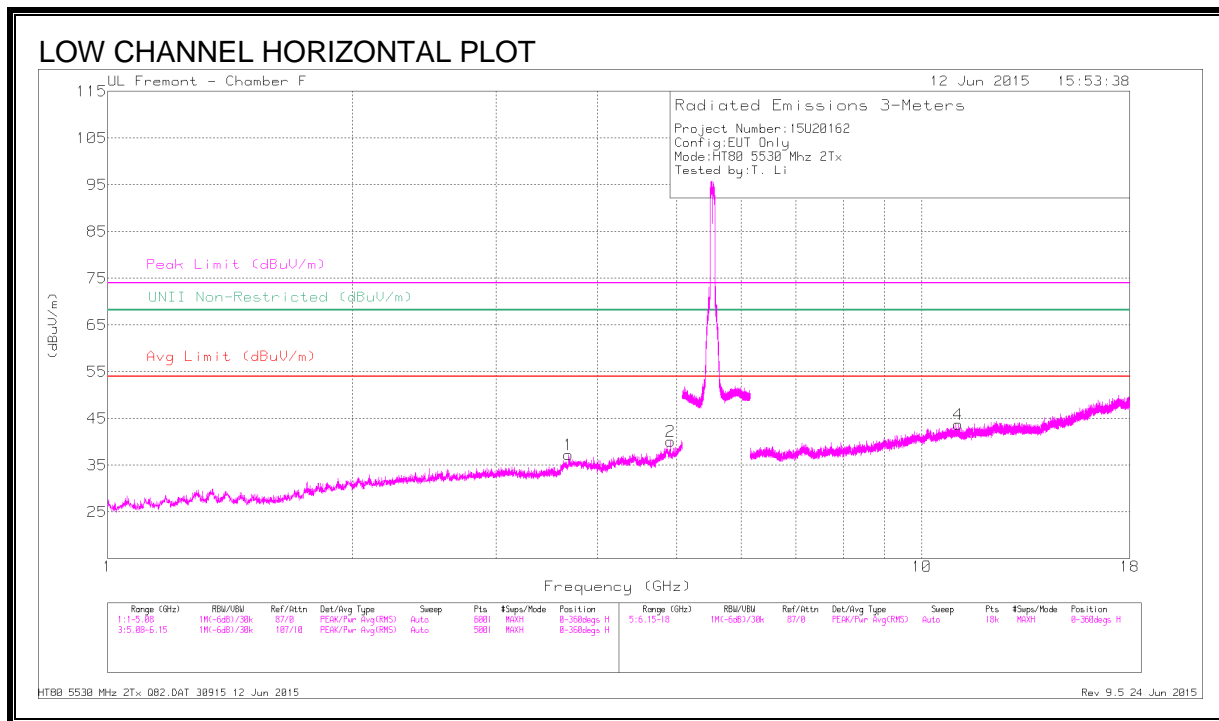

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.683	38.78	PK-U	33.2	-29.2	0	42.78	-	-	74	-31.22	-	-	233	221	H
	* 3.684	27.5	ADR	33.2	-29.2	.21	31.71	54	-22.29	-	-	-	-	233	221	H
2	* 4.916	37.83	PK-U	34.1	-26.4	0	45.53	-	-	74	-28.47	-	-	82	220	H
	* 4.915	26.59	ADR	34.1	-26.4	.21	34.5	54	-19.5	-	-	-	-	82	220	H
3	* 2.725	39.89	PK-U	32.5	-30.5	0	41.89	-	-	74	-32.11	-	-	198	257	V
	* 2.727	28.47	ADR	32.5	-30.4	.21	30.78	54	-23.22	-	-	-	-	198	257	V
4	* 11.087	34.84	PK-U	38	-21.6	0	51.24	-	-	74	-22.76	-	-	245	103	H
	* 11.088	23.31	ADR	38	-21.6	.21	39.92	54	-14.08	-	-	-	-	245	103	H
5	7.15	36.97	PK-U	35.5	-23.9	0	48.57	-	-	-	-	68.2	-19.63	239	140	H
6	* 16.006	34.97	PK-U	41.2	-21	0	55.17	-	-	74	-18.83	-	-	158	122	V
	* 16.009	24.09	ADR	41.2	-21	.21	44.5	54	-9.5	-	-	-	-	158	122	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

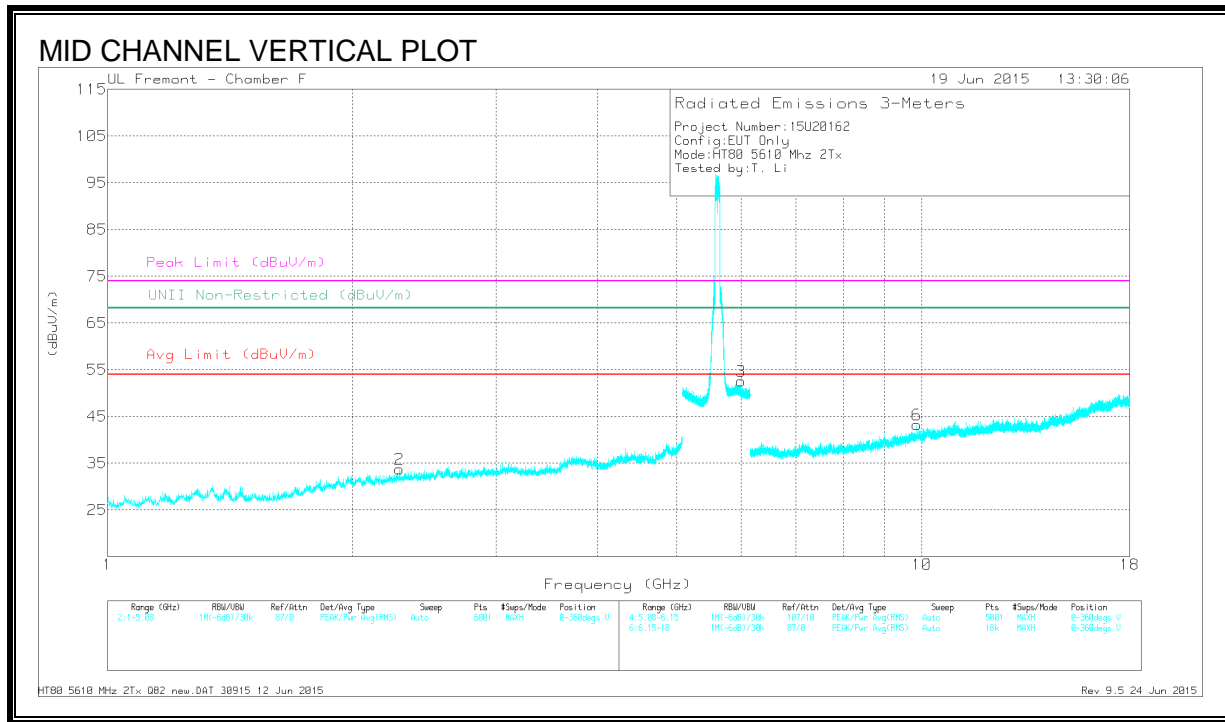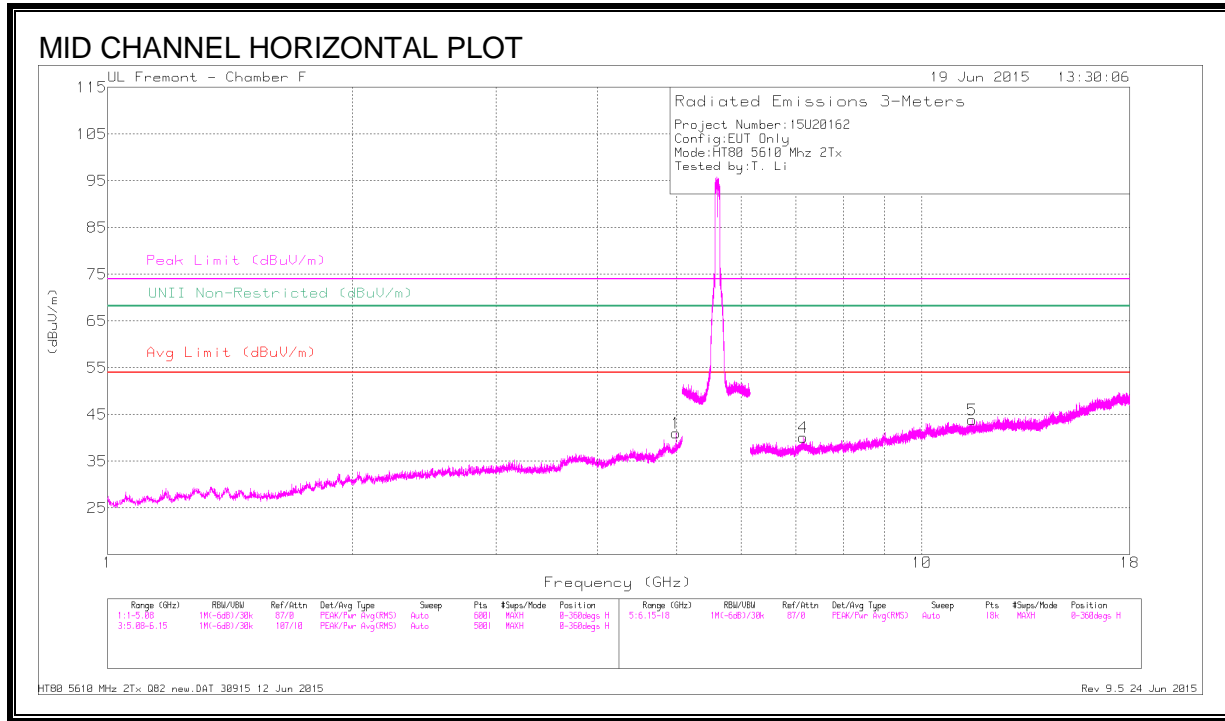

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/F/tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.989	38.49	PK-U	34.2	-26.9	0	45.79	-	-	74	-28.21	-	-	69	102	H
	* 4.987	27.02	ADR	34.2	-26.9	.21	34.53	54	-19.47	-	-	-	-	69	102	H
2	* 2.284	40.33	PK-U	31.9	-30.7	0	41.53	-	-	74	-32.47	-	-	184	245	V
	* 2.282	28.74	ADR	31.9	-30.7	.21	30.15	54	-23.85	-	-	-	-	184	245	V
3	6.002	41.26	PK-U	35.4	-17.6	0	59.06	-	-	-	-	68.2	-9.14	230	260	V
4	7.15	36.97	PK-U	35.5	-23.9	0	48.57	-	-	-	-	68.2	-19.63	181	153	H
5	* 11.518	34.68	PK-U	38.1	-22	0	50.78	-	-	74	-23.22	-	-	45	220	H
	* 11.521	23.26	ADR	38.1	-22	.21	39.57	54	-14.43	-	-	-	-	45	220	H
6	9.862	34.04	PK-U	37	-21.4	0	49.64	-	-	-	-	68.2	-18.56	238	133	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS

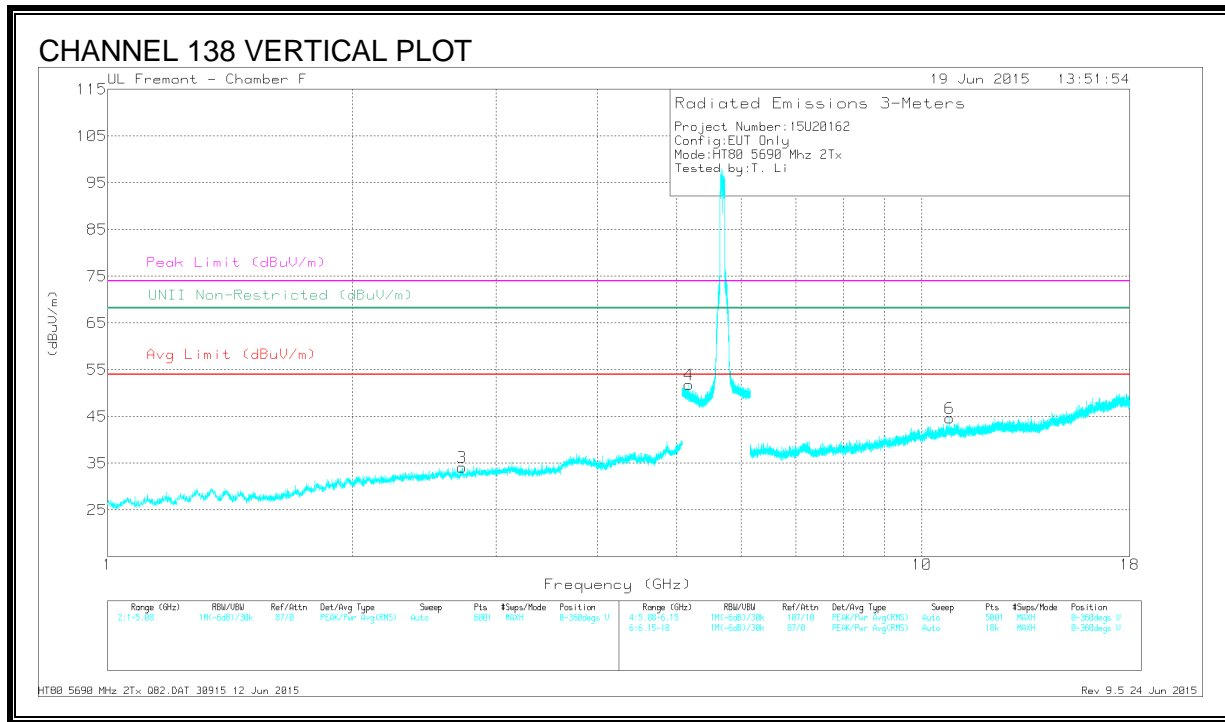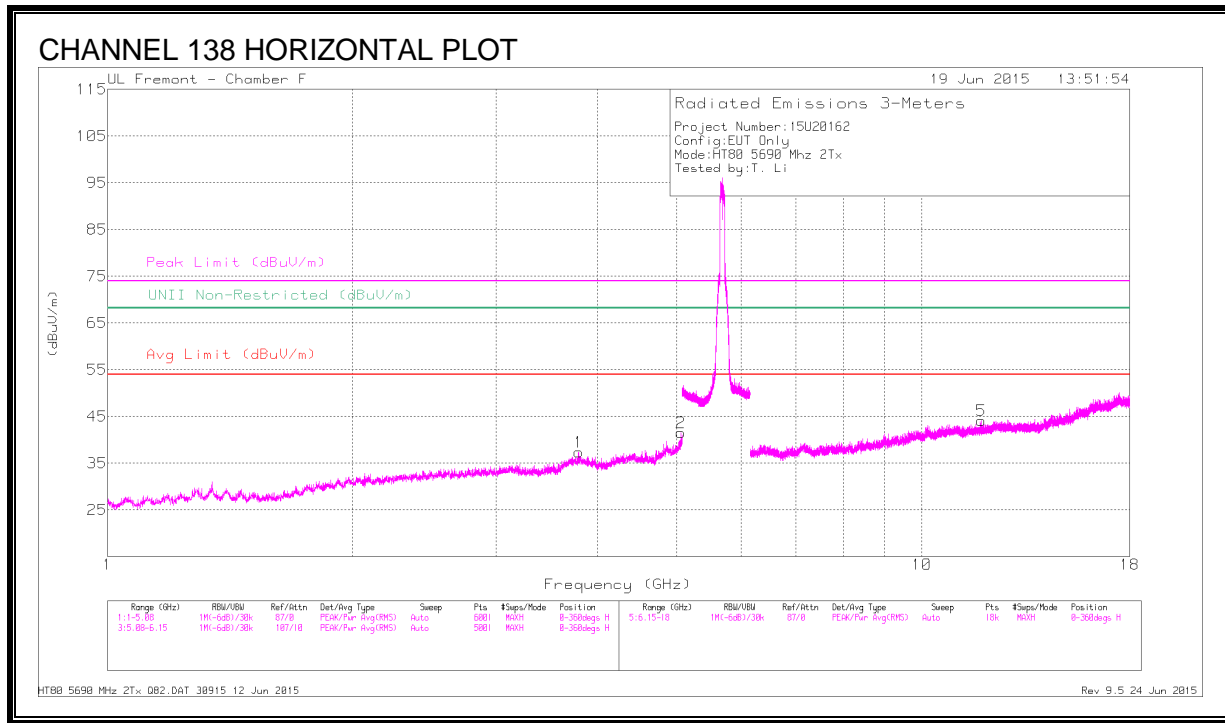

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.79	38.92	PK-U	33.3	-28.8	0	43.42	-	-	74	-30.58	-	-	35	198	H
	* 3.789	27.78	ADR	33.3	-28.8	.21	32.49	54	-21.51	-	-	-	-	35	198	H
2	* 5.057	38.76	PK-U	34.3	-25.9	0	47.16	-	-	74	-26.84	-	-	145	142	H
	* 5.058	27.63	ADR	34.3	-25.9	.21	36.24	54	-17.76	-	-	-	-	145	142	H
3	* 2.724	39.91	PK-U	32.5	-30.5	0	41.91	-	-	74	-32.09	-	-	239	102	V
	* 2.724	28.56	ADR	32.5	-30.5	.21	30.77	54	-23.23	-	-	-	-	239	102	V
4	5.175	42.01	PK-U	34.3	-18.4	0	57.91	-	-	-	-	68.2	-10.29	353	130	V
5	* 11.821	34.24	PK-U	38.3	-21.9	0	50.64	-	-	74	-23.36	-	-	302	201	H
	* 11.823	23.38	ADR	38.3	-21.9	.21	39.99	54	-14.01	-	-	-	-	302	201	H
6	* 10.826	33.74	PK-U	38	-21.2	0	50.54	-	-	74	-23.46	-	-	194	265	V
	* 10.827	23.01	ADR	38	-21.2	.21	40.02	54	-13.98	-	-	-	-	194	265	V


* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.20. 802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND


RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL)

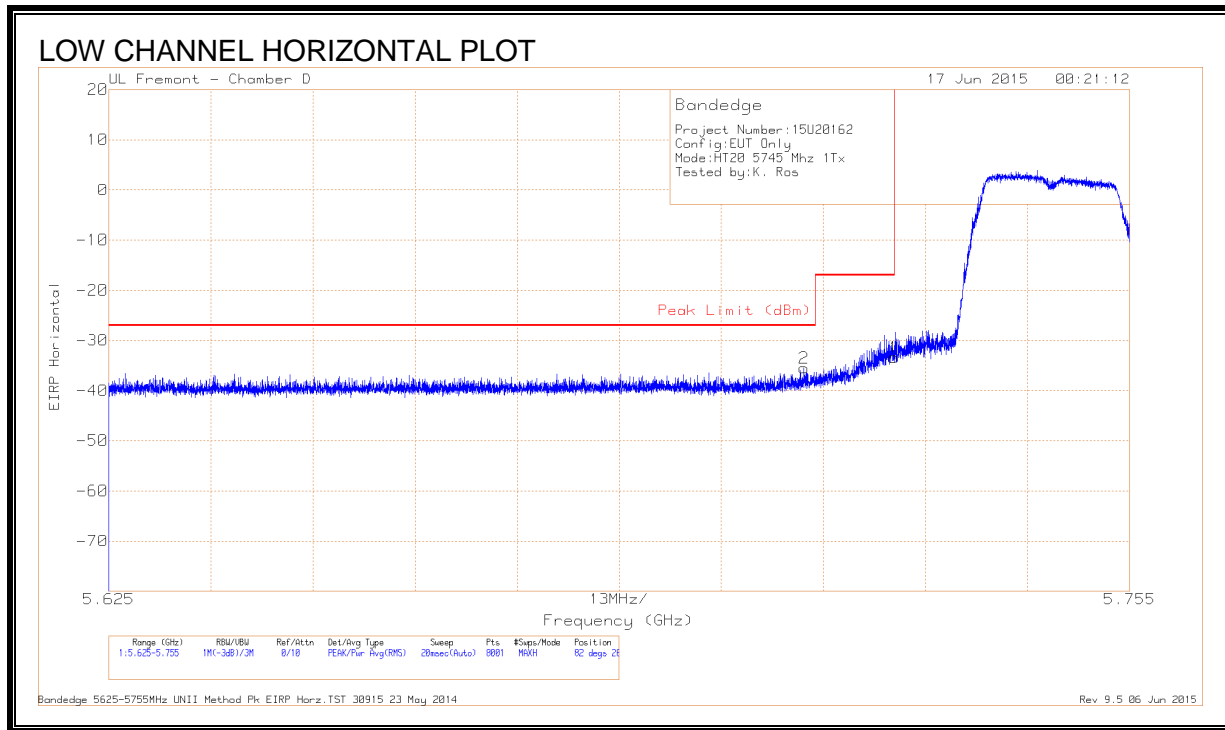

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-62.16	Pk	34.6	-17.6	11.8	-33.36	-17	-16.36	82	268	H
2	5.714	-64.38	Pk	34.6	-17.5	11.8	-35.48	-27	-8.48	82	268	H

Pk - Peak detector

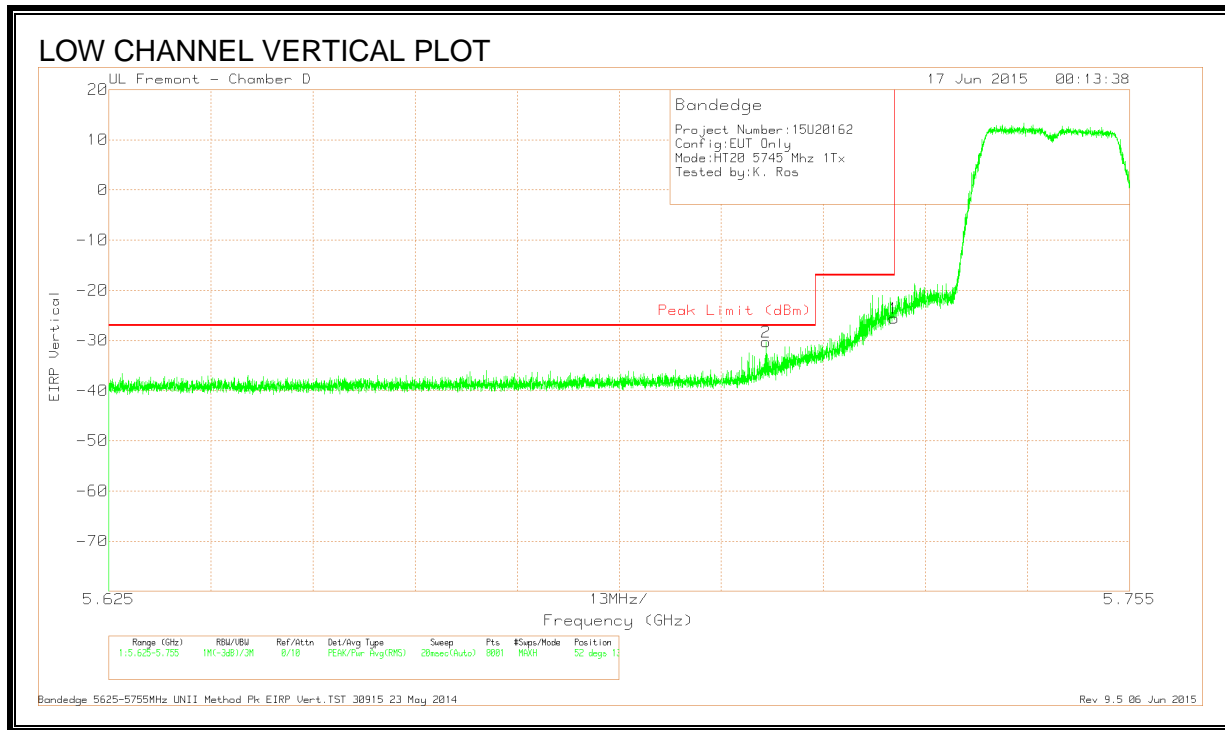

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-54.38	Pk	34.6	-17.6	11.8	-25.58	-17	-8.58	52	137	V
2	5.709	-59.09	Pk	34.5	-17.5	11.8	-30.29	-27	-3.29	52	137	V

Pk - Peak detector