FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 1

CERTIFICATION TEST REPORT

FOR

CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL NUMBERS: A1634, A1687, A1690 AND A1699

FCC ID: BCG-E2944A
IC: 579C-E2944A

REPORT NUMBER: 15U20162-E4, REVISION A

ISSUE DATE: JULY 27, 2015

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	07/24/2015	Initial Issue	C. Pang
A	07/27/2015	Address TCB's questions on page 9 and 192/193 & 290/291.	C. Pang

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 5

2. TEST METHODOLOGY 6

3. FACILITIES AND ACCREDITATION 6

4. CALIBRATION AND UNCERTAINTY 6

4.1. MEASURING INSTRUMENT CALIBRATION 6

4.2. SAMPLE CALCULATION 6

4.3. MEASUREMENT UNCERTAINTY 7

5. EQUIPMENT UNDER TEST 8

5.1. DESCRIPTION OF EUT 8

5.2. MAXIMUM OUTPUT POWER 8

5.3. DESCRIPTION OF AVAILABLE ANTENNAS 8

5.4. SOFTWARE AND FIRMWARE 8

5.5. WORST-CASE CONFIGURATION AND MODE 9

5.6. DESCRIPTION OF TEST SETUP 10

6. TEST AND MEASUREMENT EQUIPMENT 14

7. MEASUREMENT METHODS 15

8. ANTENNA PORT TEST RESULTS (MODEL: A1687) 16

9. ANTENNA PORT TEST RESULTS (MODEL: A1634) 17

9.1. ON TIME AND DUTY CYCLE 17

9.2. 802.11b SISO MODE IN THE 2.4 GHz BAND 21

9.2.1. 6 dB BANDWIDTH 21
9.2.2. 99% BANDWIDTH 27
9.2.3. AVERAGE POWER 33
9.2.4. OUTPUT POWER 34
9.2.5. POWER SPECTRAL DENSITY 37
9.2.6. OUT-OF-BAND EMISSIONS 43

9.3. 802.11n HT20 SISO MODE IN THE 2.4 GHz BAND 56

9.3.1. 6 dB BANDWIDTH 56
9.3.2. 99% BANDWIDTH 66
9.3.3. AVERAGE POWER 76
9.3.4. OUTPUT POWER 77
9.3.5. POWER SPECTRAL DENSITY 80
9.3.6. OUT-OF-BAND EMISSIONS 90

9.4. 802.11n HT20 2TX CDD MODE IN THE 2.4 GHz BAND 111

9.4.1. 6 dB BANDWIDTH 111
9.4.2. 99% BANDWIDTH 121

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.4.3. AVERAGE POWER 131
9.4.4. OUTPUT POWER 132
9.4.5. POWER SPECTRAL DENSITY 134
9.4.6. OUT-OF-BAND EMISSIONS 144

10. RADIATED TEST RESULTS (MODEL: A1634) 165

10.1. LIMITS AND PROCEDURE 165

10.2. TRANSMITTER ABOVE 1 GHz 166
10.2.1. 802.11b 1Tx MODE IN THE 2.4 GHz BAND Chain 0 166
10.2.2. 802.11b 1Tx MODE IN THE 2.4 GHz BAND Chain 1 180
10.2.3. 802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND Chain 0 194
10.2.4. 802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND Chain 1 216
10.2.5. 802.11n HT20 2TX MODE IN THE 2.4 GHz BAND 238

10.3. WORST-CASE BELOW 1 GHz 260

10.4. WORST-CASE 18 to 26 GHz 262

11. RADIATED TEST RESULTS (MODEL: A1687) 263

11.1. LIMITS AND PROCEDURE 263

11.2. TRANSMITTER ABOVE 1 GHz 264
11.2.1. 802.11b 1Tx MODE IN THE 2.4 GHz BAND Chain 0 264
11.2.2. 802.11b 1Tx MODE IN THE 2.4 GHz BAND Chain 1 278
11.2.3. 802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND Chain 0 292
11.2.4. 802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND Chain 1 314
11.2.5. 802.11n HT20 2TX MODE IN THE 2.4 GHz BAND 336

11.3. WORST-CASE BELOW 1 GHz 358

11.4. WORST-CASE 18 to 26 GHz 360

12. AC POWER LINE CONDUCTED EMISSIONS 362

12.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE 363

12.2. EUT POWERED BY HOST PC VIA USB CABLE 365

13. SETUP PHOTOS 367

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL: A1634, A1687, A1690 AND A1699

SERIAL NUMBER: 1634:
AC39PV08VG073 (RADIATED); C39PV07GGQ73(CONDUCTED)
A1687:
C39PL01EGLJW (RADIATED); C39PL01LGLJQ(CONDUCTED)

DATE TESTED: MAY 10- JULY 14, 2015

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 1	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

CHIN PANG
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Tested By:

ERIC YU
EMC ENGINEER
UL VERIFICATION SERVICES INC.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☒ Chamber D
☐ Chamber B	☒ Chamber E
☐ Chamber C	☒ Chamber F
	☐ Chamber G
	☒ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://ts.nist.gov/standards/scopes/2000650.htm.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/CDMA/EVDO/LTE radio, IEEE 802.11a/b/g/n/ac, NFC, Bluetooth and GPS radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b 1TX	21.02	126.47
2412 - 2462	802.11g	Covered by HT20 1TX	
2412 - 2462	802.11n HT20 1TX	25.68	369.83
2412 - 2462	802.11n HT20 2TX	28.32	679.20

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain	
	Chain 0	Chain 1
2.4	0.16	1.41

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 7.15.239.6
The test utility software used during testing was wl 7.15.239.6

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that Y-landscape orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Y-landscape orientation.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20mode: MCS0

The target power for 802.11g and 802.11n HT20 1TX are the same and use the same modulation (OFDM).

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in BT/BLE 2.4 GHz, 5GHz and Cellular bands; or WLAN 2.4GHz and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.

Based on the manufacturer's statement Model A1687, A1690 and A1699 are exactly same, except for marketing reasons.

For WLAN/BT mode, all four models use the same WLAN/BT chipset. Therefore, conducted tests on Model A1634 was considered representative of Model A1687. Radiated testing was performed on both models A1634 and A1687.

Delta Items	A1634	A1687	A1690	A1699
Band 30	Yes	No	No	No

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop AC/DC adapter	Lenovo	92P1160	11S92P1160Z1ZBGH798B12	NA
Laptop	Lenovo	7659	L3-AL664 08/03	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (AC POWER CONDUCTED TEST AND BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP-Conducted

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.

SETUP DIAGRAM

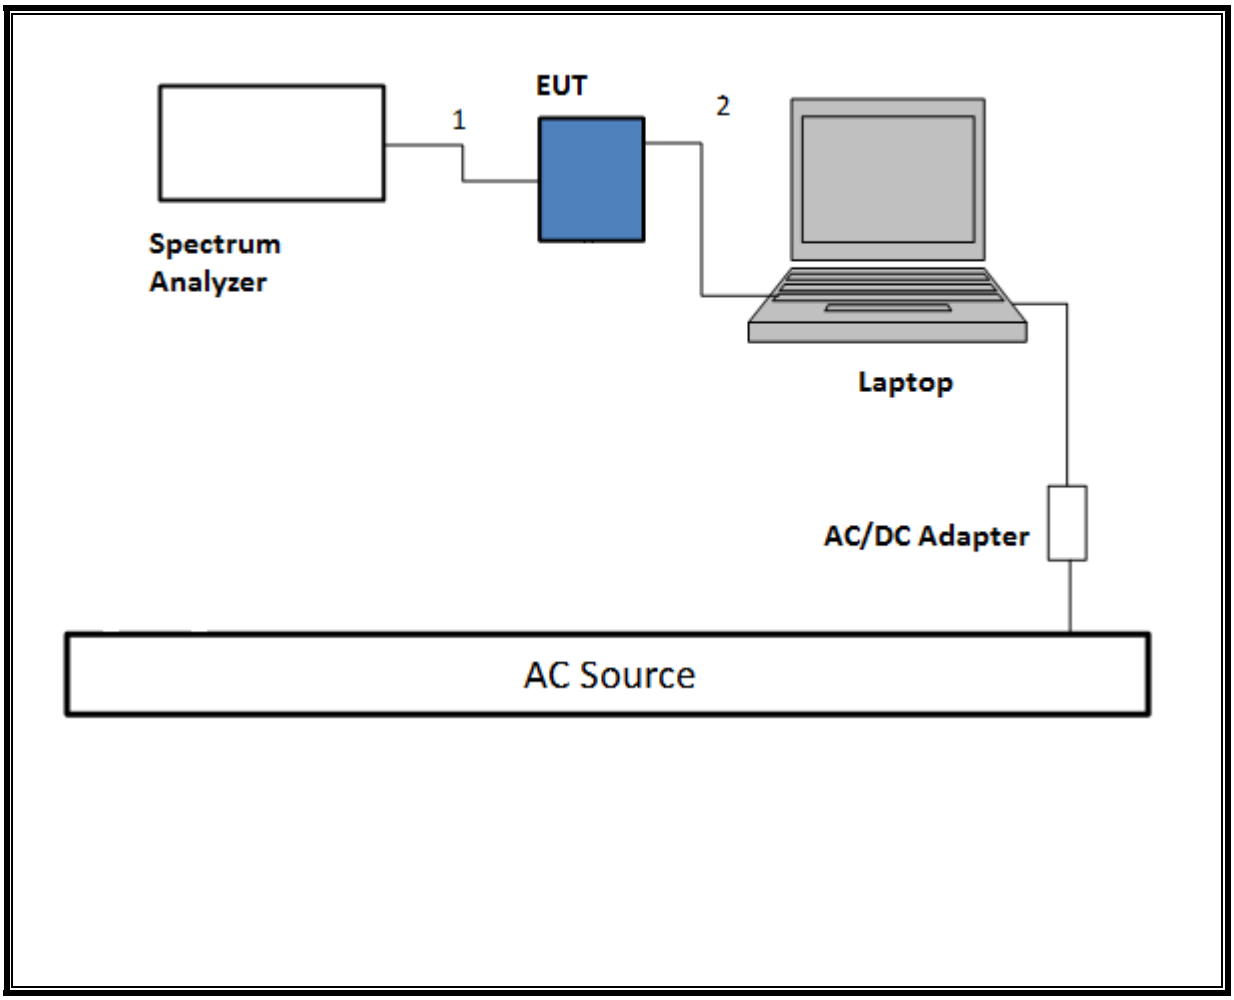

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was tested battery powered. Test software exercised the EUT.

SETUP DIAGRAM

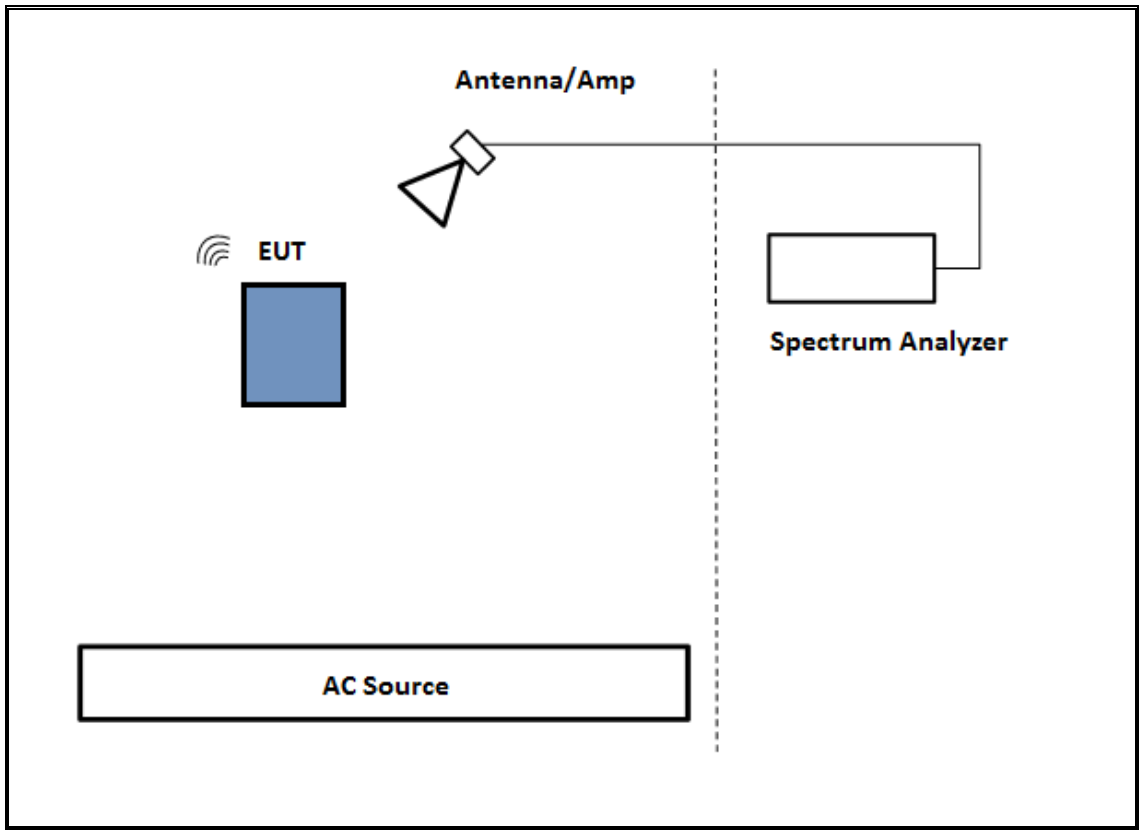

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS

The EUT was tested with earphone connected and powered by AC adapter. Test software exercised the EUT.

SETUP DIAGRAM

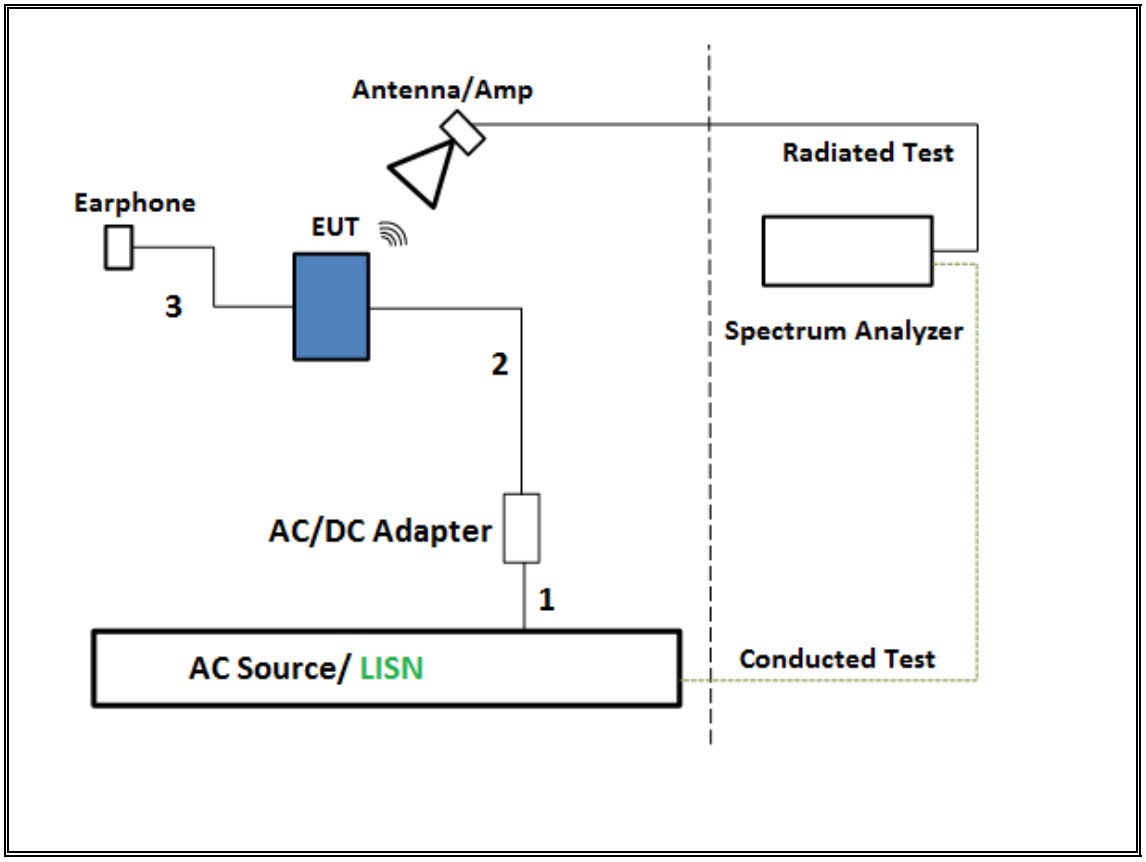

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	**Manufacturer**	**Model**	**Asset**	**Cal Due**
Antenna, Horn 1-18GHz	ETS Lindgren	3117	00143448	2/10/2016
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	A022813-1	1/14/2016
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	1782158	1/26/2016
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	171202	11/1/2015
Spectrum Analyzer, PXA, 3Hz to 50GHz	Agilent	N9030A	MY52350427	9/13/2015
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	325118	2/14/2016
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	MY52350675	3/16/2016
Power Meter, P-series single channel	Agilent	N1911A	GB45100212	10/9/2015
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	MY53260010	7/12/2015
*Power Meter, Peak	Boonton	4541	N/A	7/17/2015
*Power Sensor, Peak	Boonton	57006	N/A	7/17/2015
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	1049	12/17/2015
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Agilent	8449B	3008A01114	10/4/2015
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	100935	9/16/2015
LISN for Conducted Emissions CISPR-16	FCC	50/250-25-2	114	1/16/2016
Power Cable, Line Conducted Emissions ANSI 63.4	U L	PG1	N/A	7/28/2015
UL SOFTWARE				
*Radiated Software	UL	UL EMC	Ver 9.5, July 22, 2014	
*Conducted Software	UL	UL EMC	Ver 2.2, March 31, 2015	
*AC Line Conducted Software	UL	UL EMC	Ver 9.5, April 3, 2015	

Note: * indicates automation software version used in the compliance certification testing

*equipment was used before expiration date.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v03r03, Section 8.1.

Output Power: KDB 558074 D01 v03r03, Section 9.1.2

Power Spectral Density: KDB 558074 D01 v03r03, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r03, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r03, Section 12.1.

Band-edge: KDB 558074 D01 v03r03, Section 12.1

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8. ANTENNA PORT TEST RESULTS (MODEL: A1687)

For antenna port data, refer to Model A1634.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9. ANTENNA PORT TEST RESULTS (MODEL: A1634)

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
802.11b 1TX,Chain 0	5.000	5.000	1.000	100.00%	0.00	0.010
802.11b 1TX,Chain 1	5.000	5.000	1.000	100.00%	0.00	0.010
802.11n HT20 1TX,Chain 0	1.912	1.932	0.990	98.96%	0.00	0.010
802.11n HT20 1TX,Chain 1	1.920	1.941	0.989	98.92%	0.00	0.010
802.11n HT20 CDD,Chain 0	1.917	1.936	0.990	99.02%	0.00	0.010
802.11n HT20 CDD,Chain 1	1.917	1.941	0.988	98.76%	0.00	0.010

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE PLOTS

DUTY CYCLE 802.11b 1TX Chain 0 MODE

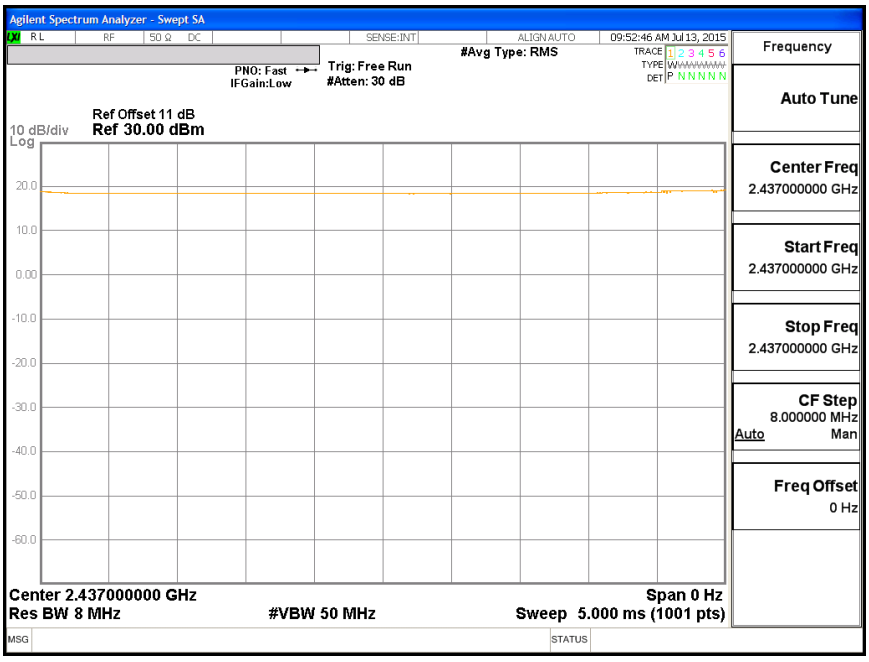

DUTY CYCLE 802.11b 1TX Chain 1 MODE

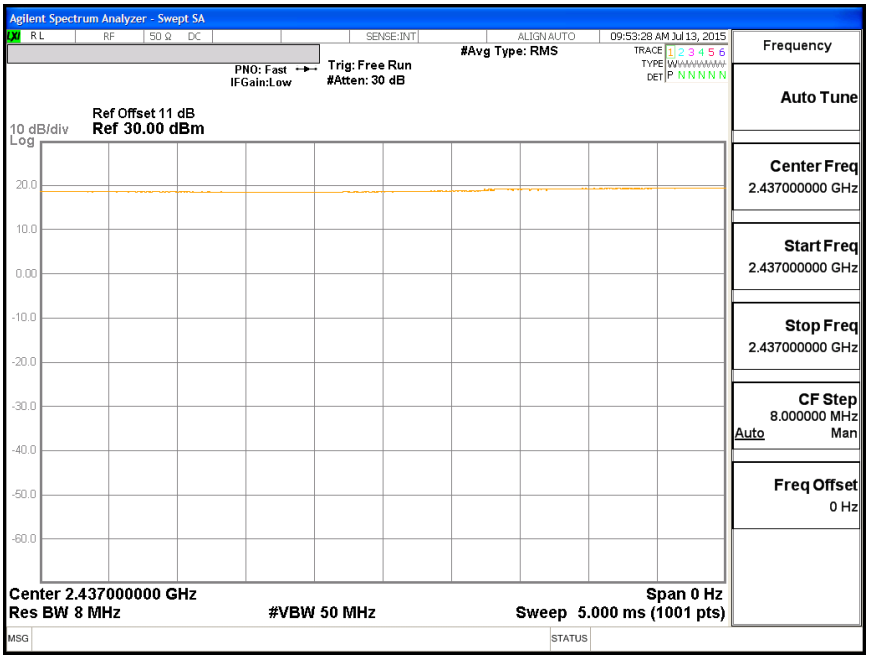

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE 802.11n HT20 1TX Chain 0 MODE

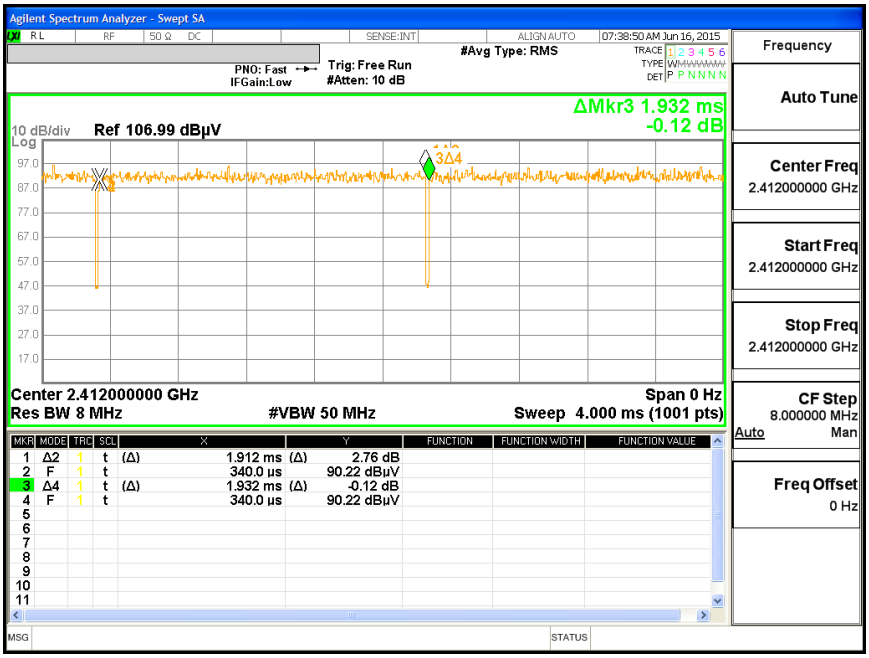

DUTY CYCLE 802.11n HT20 1TX Chain 1 MODE

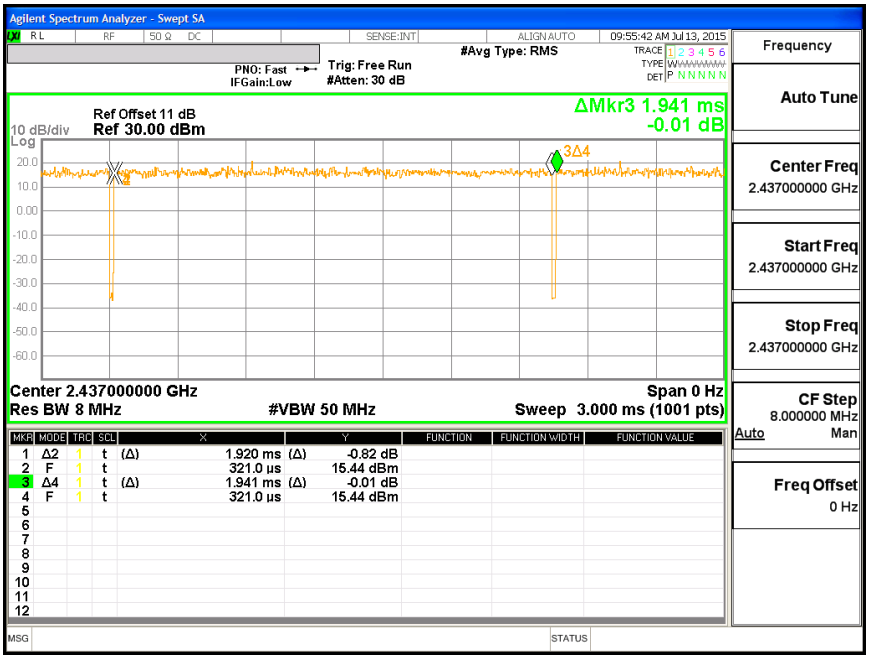

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE 802.11n HT20 Chain 0 CDD MODE

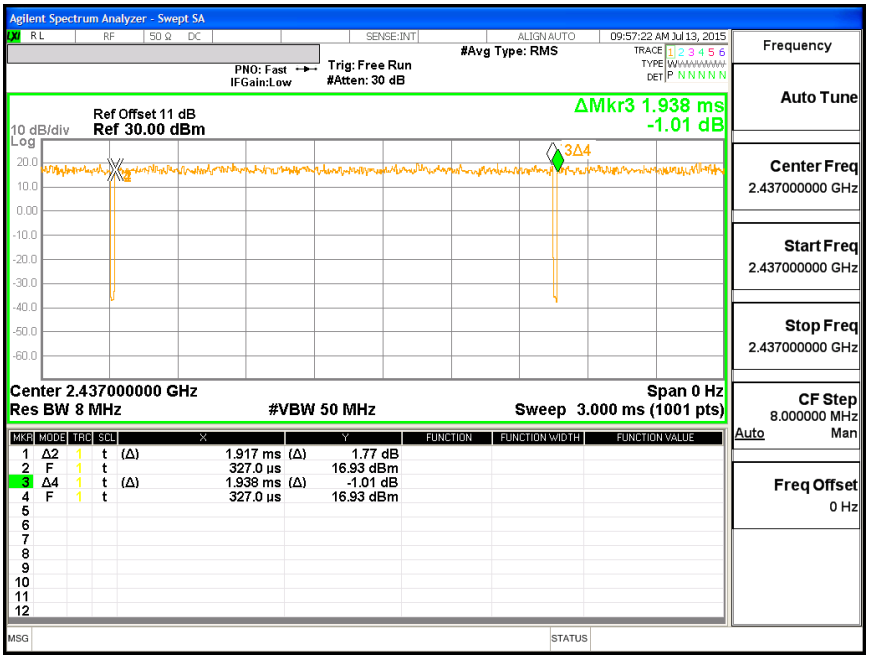

DUTY CYCLE 802.11n HT20 Chain 1 CDD MODE

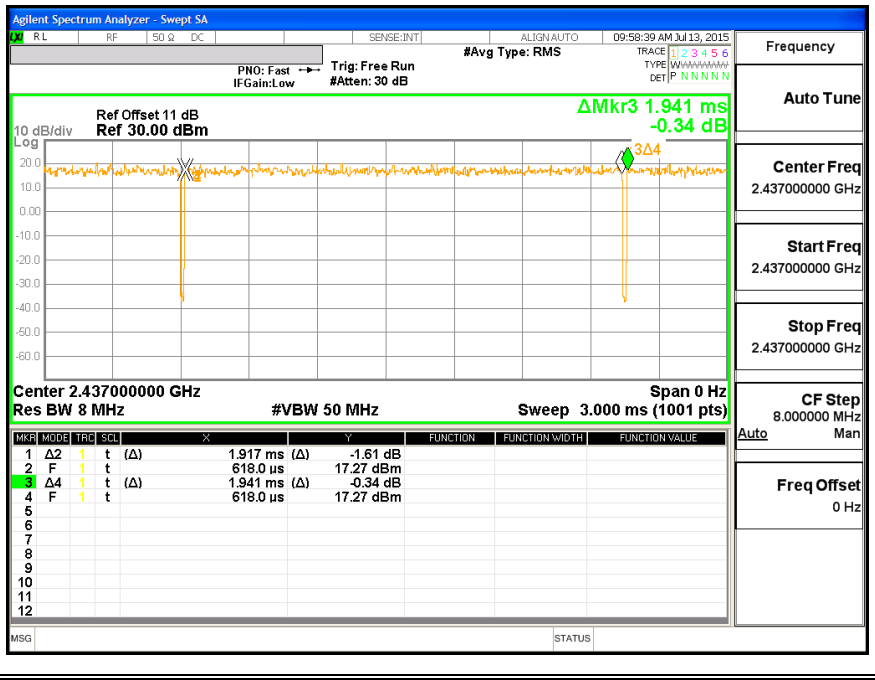

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2. 802.11b SISO MODE IN THE 2.4 GHz BAND

9.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS for Chain 0

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.567	0.5
Mid	2437	9.048	0.5
High_11	2462	8.554	0.5
High_12	2467	8.593	0.5
High_13	2472	9.044	0.5

RESULTS for Chain 1

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	9.525	0.5
Mid	2437	9.072	0.5
High_11	2462	9.058	0.5
High_12	2467	9.022	0.5
High_13	2472	8.580	0.5

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH, Chain 0

6 dB BANDWIDTH LOW CH

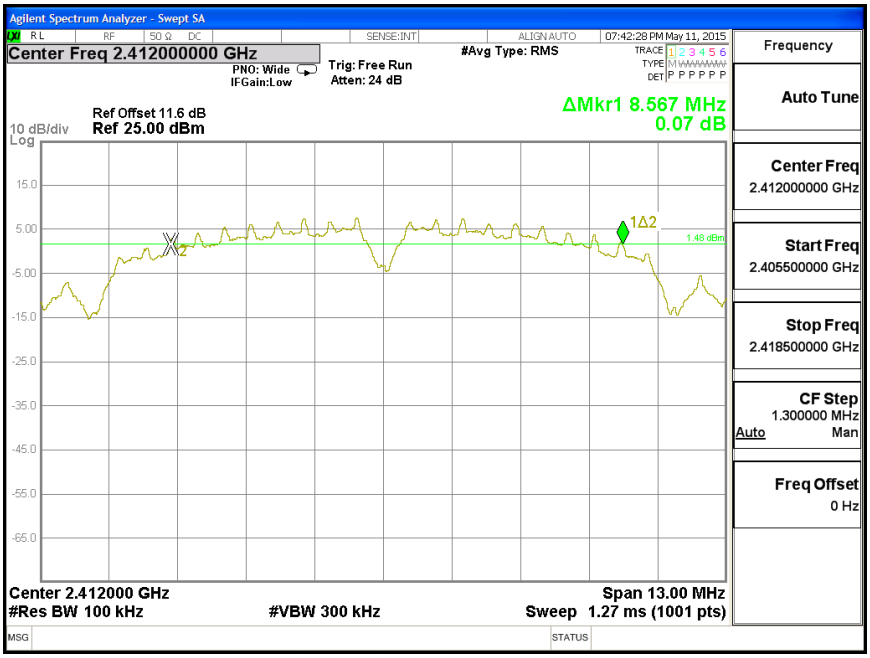

6 dB BANDWIDTH MID CH

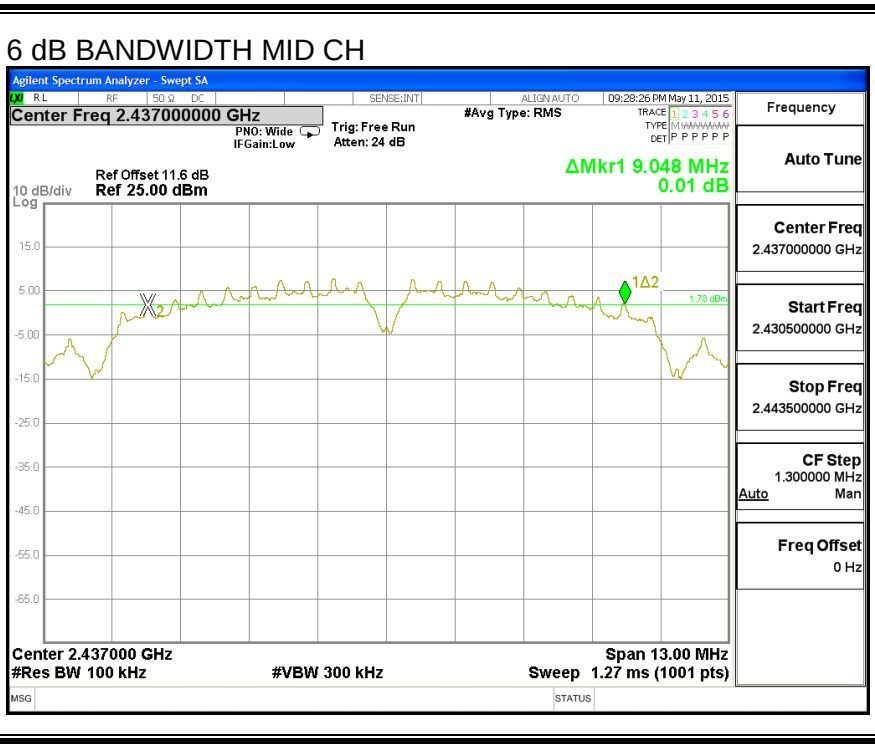

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH HIGH CH 11

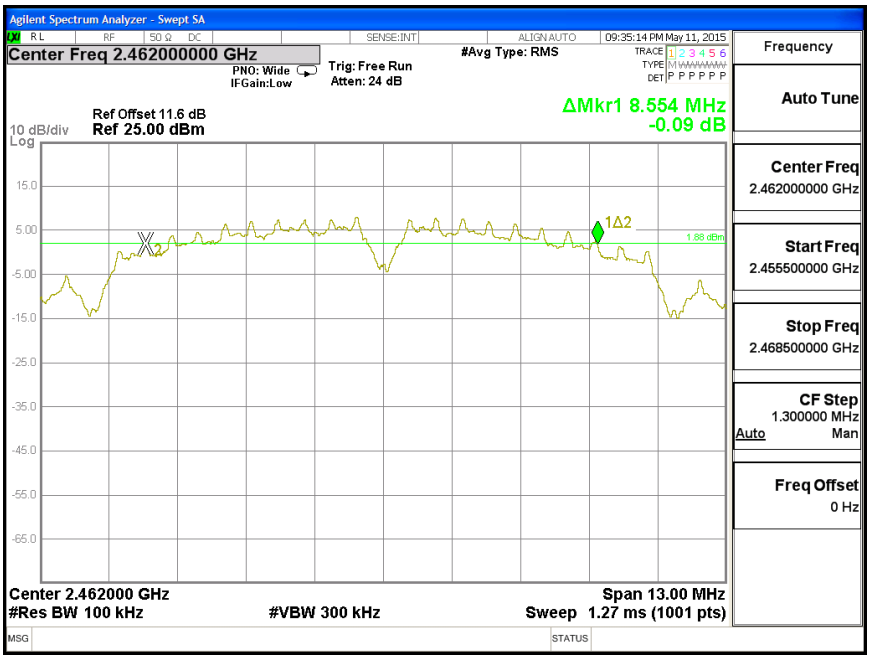

6 dB BANDWIDTH HIGH CH 12

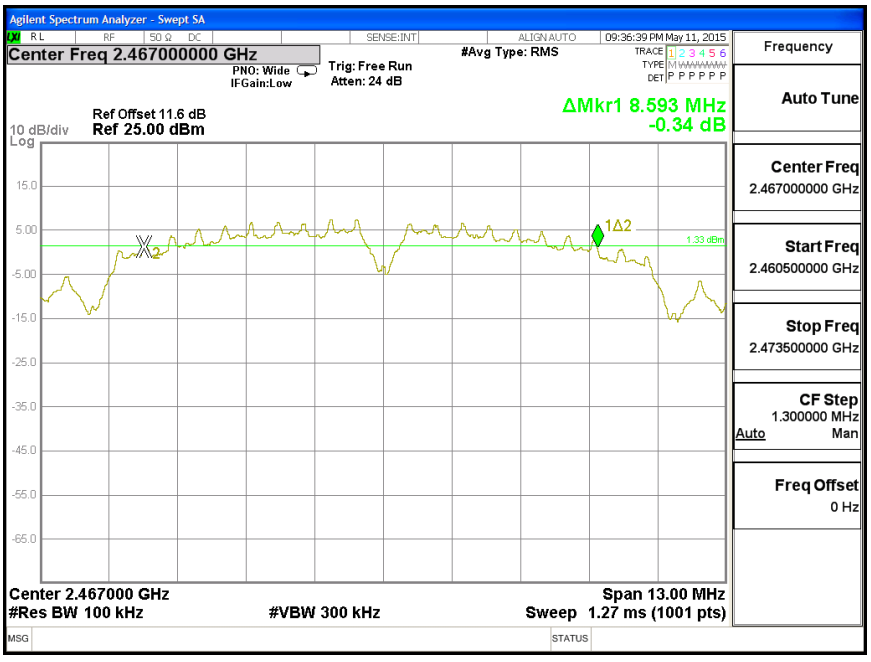

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH HIGH CH 13

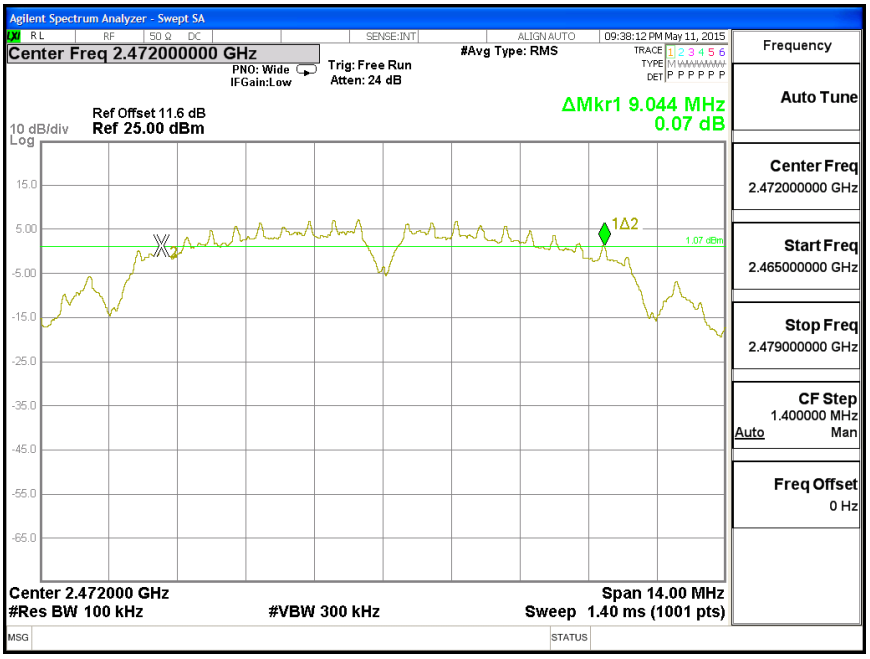

6 dB BANDWIDTH, Chain 1

6 dB BANDWIDTH LOW CH

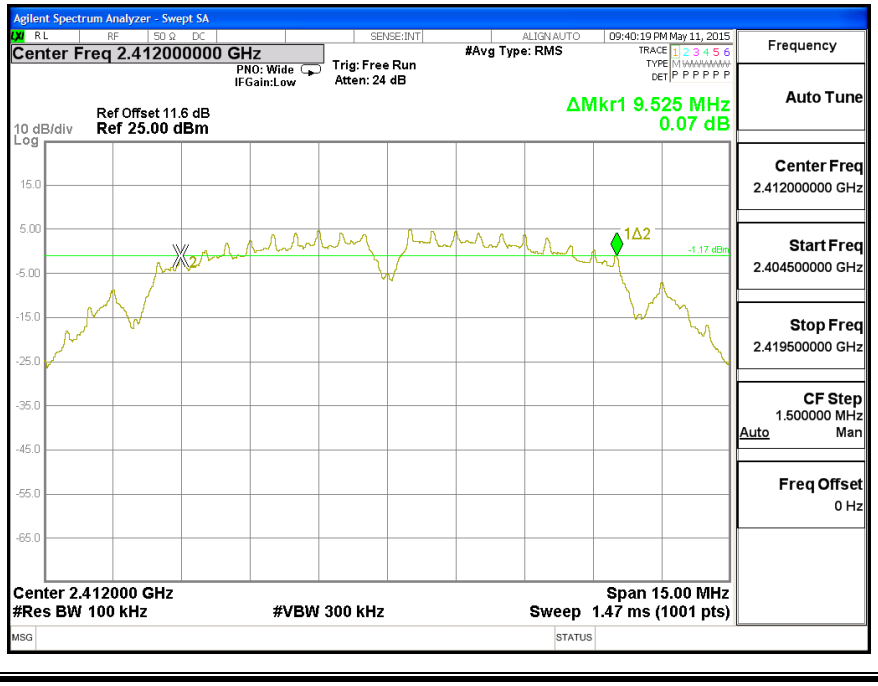

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH MID CH

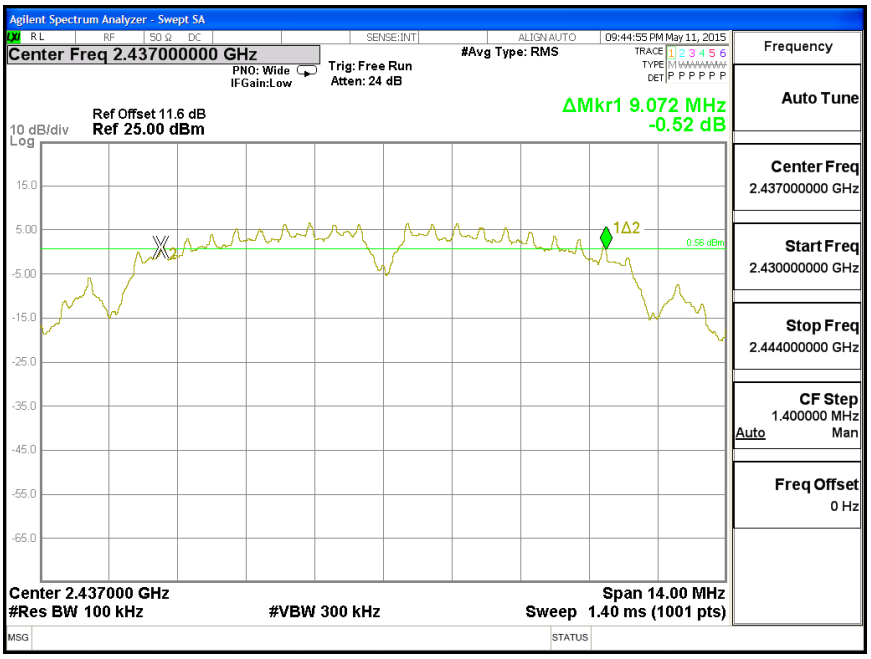

6 dB BANDWIDTH HIGH CH 11

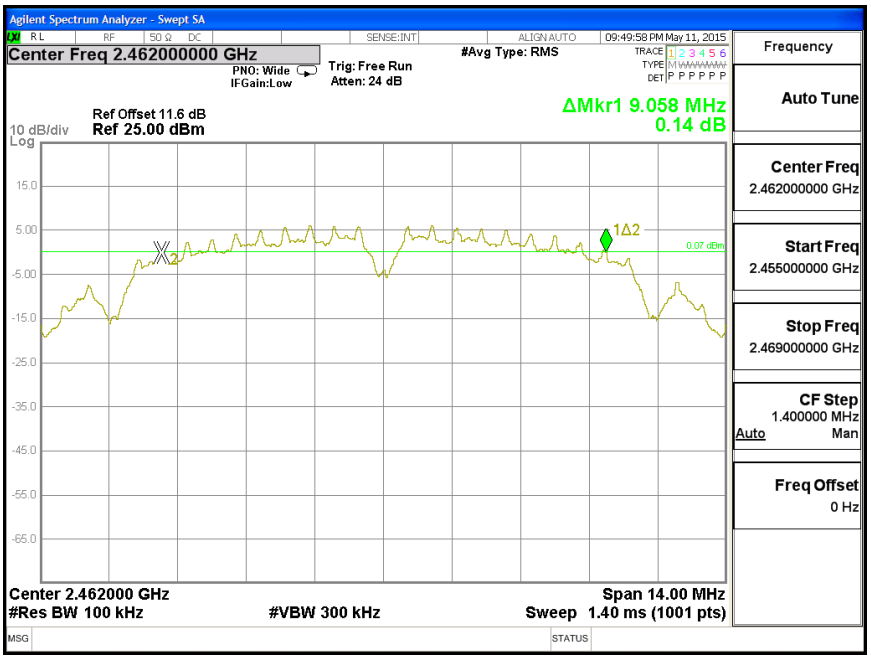

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH HIGH CH 12

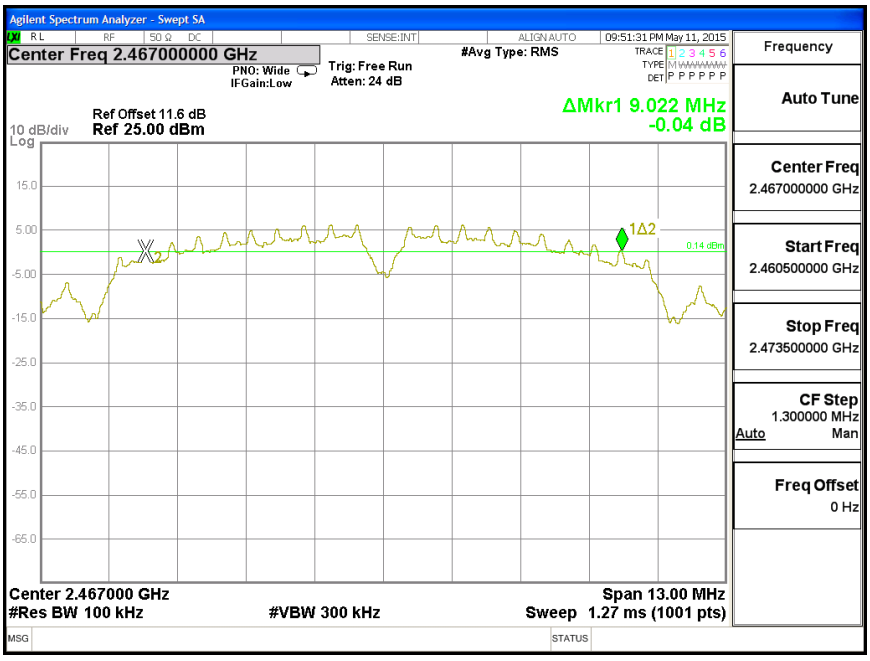

6 dB BANDWIDTH HIGH CH 13

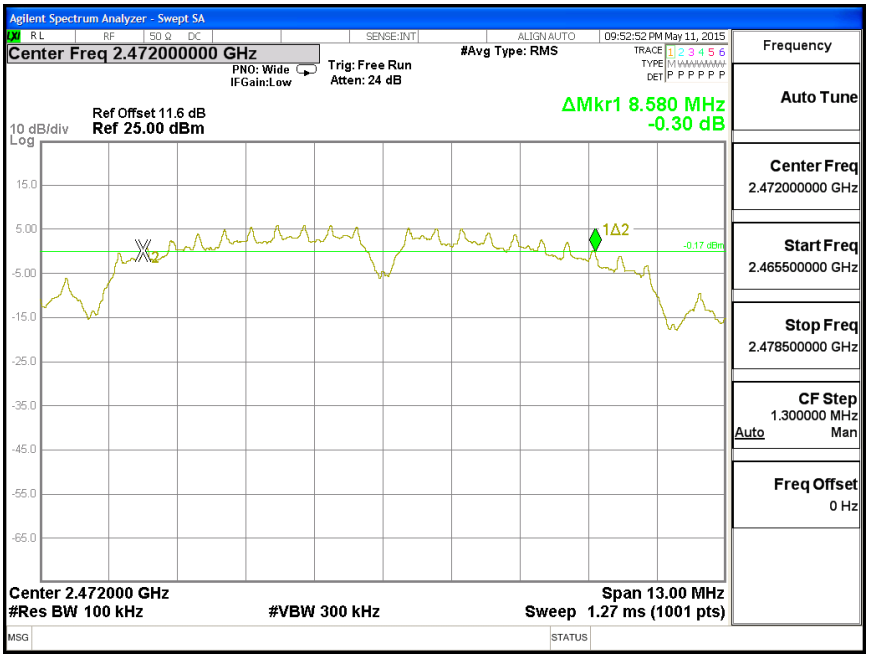

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS for Chain 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	11.104
Mid	2437	11.584
High_11	2462	10.942
High_12	2467	11.449
High_13	2472	11.265

RESULTS for Chain 1

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	11.353
Mid	2437	11.577
High_11	2462	11.347
High_12	2467	11.182
High_13	2472	11.037

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, Chain 0

BANDWIDTH LOW CH

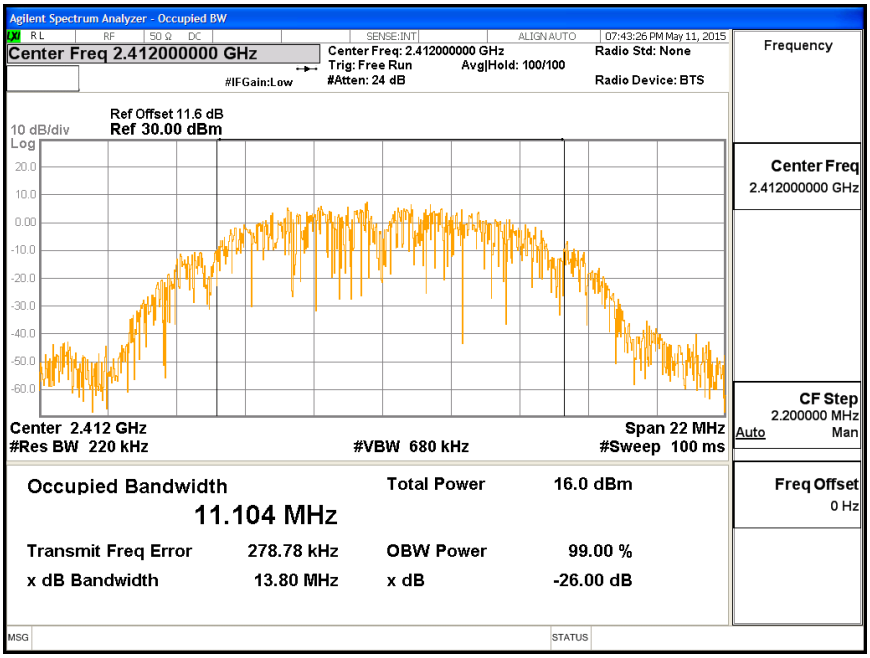

BANDWIDTH MID CH

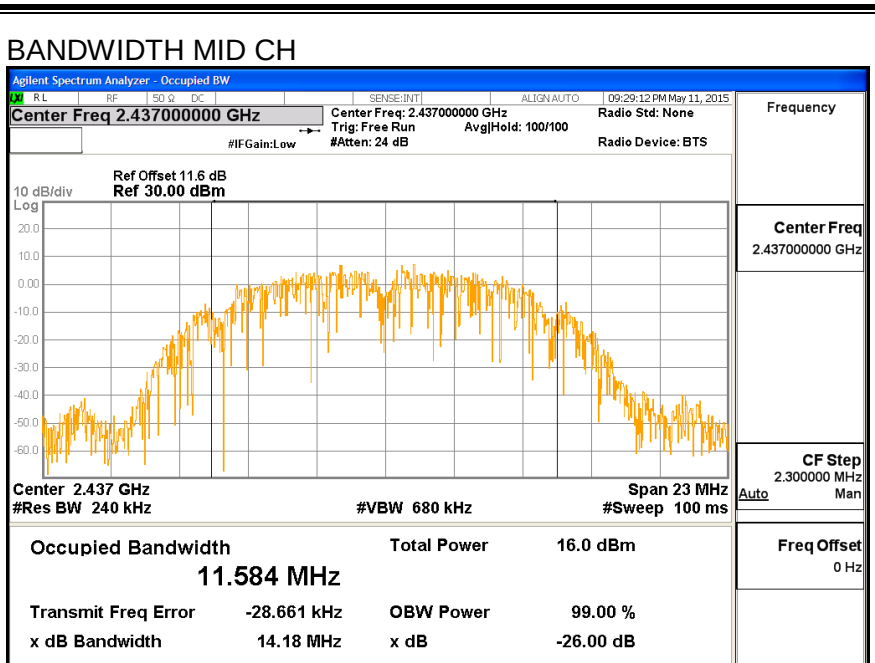

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH11

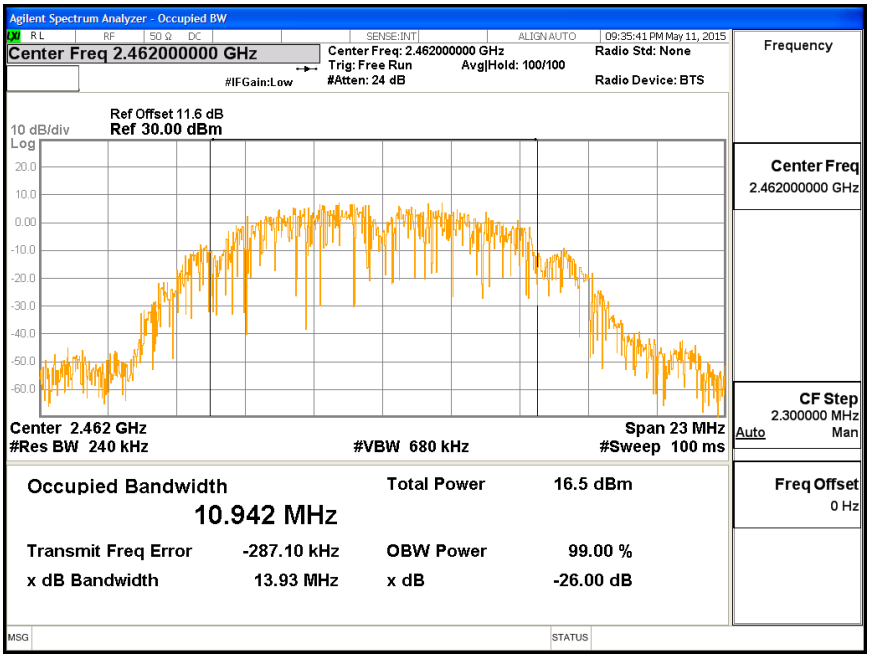

BANDWIDTH HIGH CH12

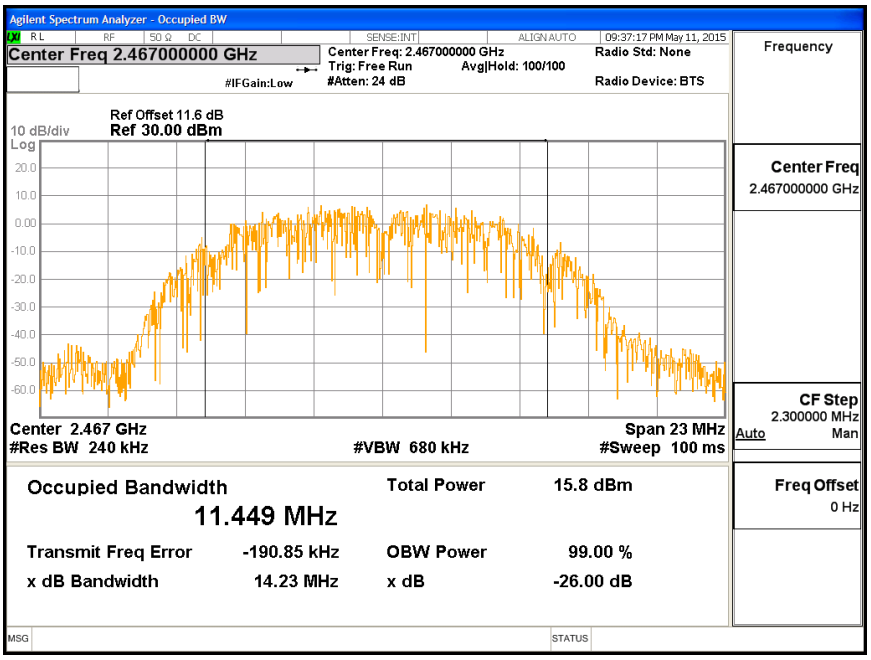

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH 13

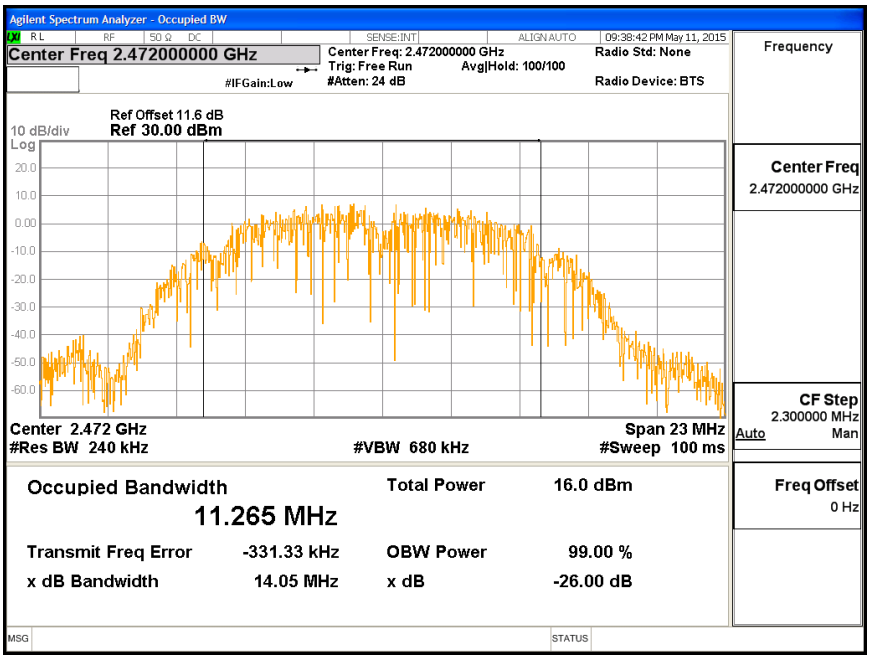

99% BANDWIDTH, Chain 1

BANDWIDTH LOW CH

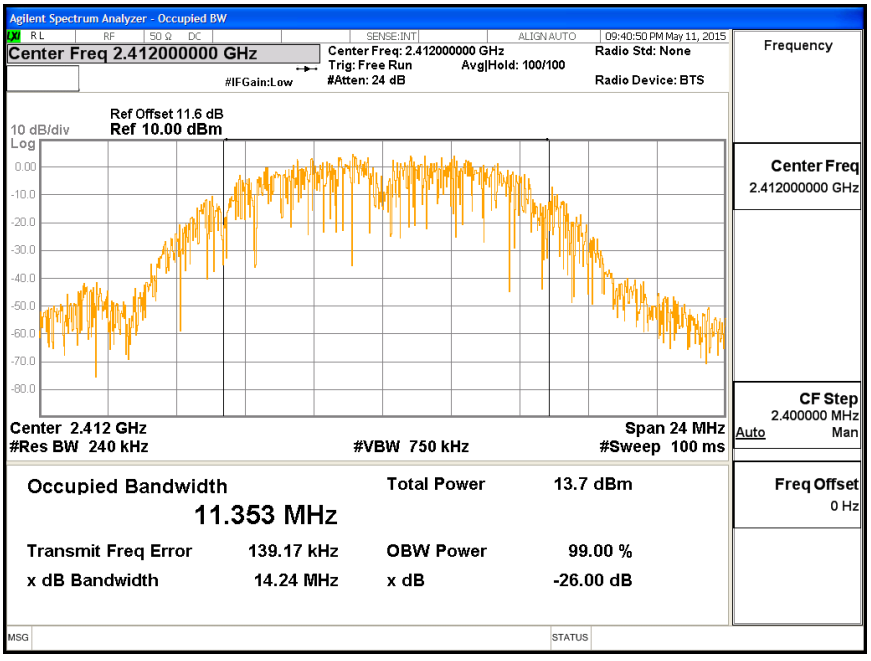

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH MID CH

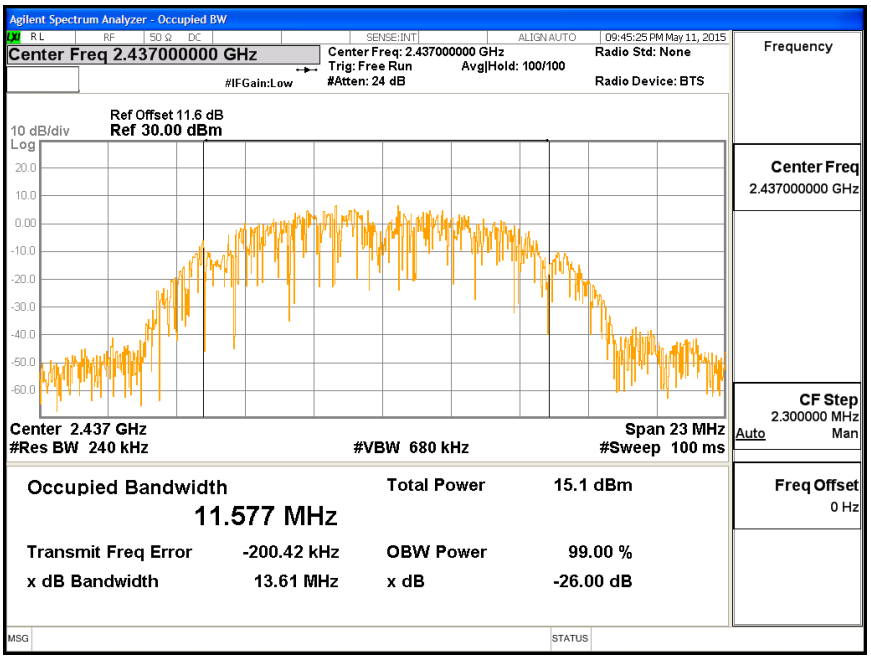

BANDWIDTH HIGH CH11

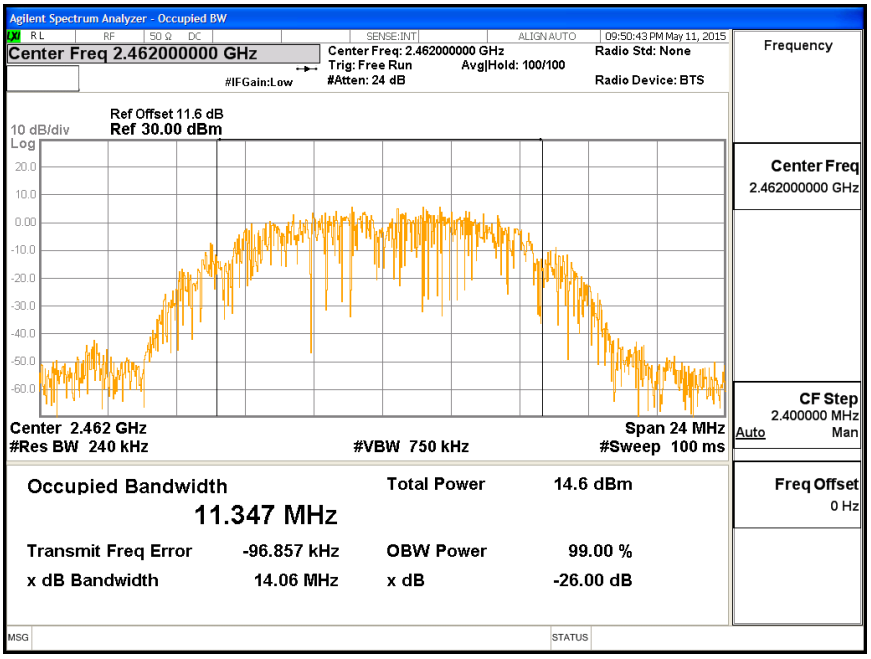

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH12

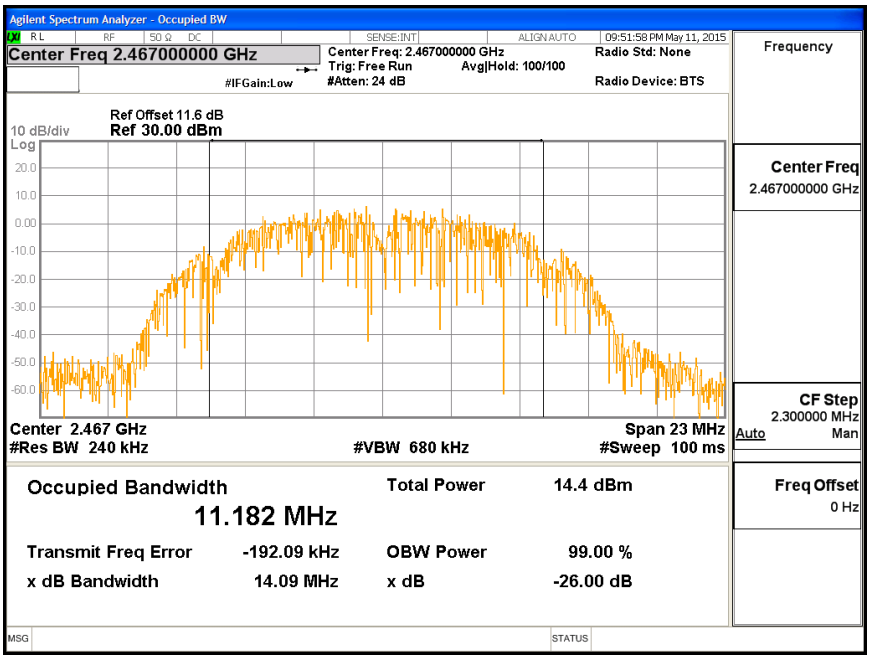

BANDWIDTH HIGH CH 13

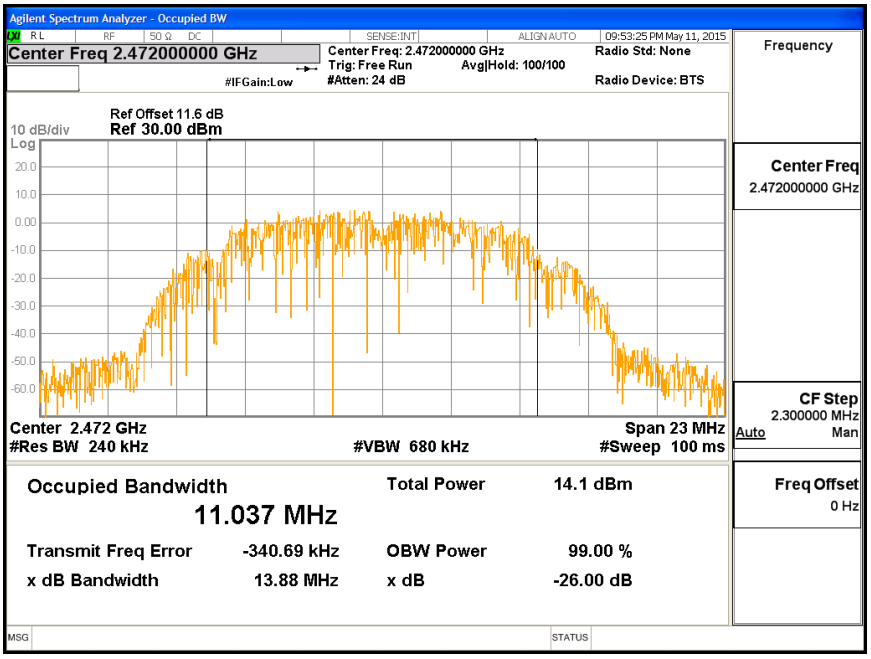

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS for Chain 0

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.92
Mid	2437	18.32
High_11	2462	17.46
High_12	2467	17.48
High_13	2472	15.44

RESULTS for Chain 1

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.94
Mid	2437	17.94
High_11	2462	17.44
High_12	2467	17.46
High_13	2472	15.50

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2.4. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS for Chain 0

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	0.16	30.00	30	36	30.00
Mid	2437	0.16	30.00	30	36	30.00
High_11	2462	0.16	30.00	30	36	30.00
High_12	2467	0.16	30.00	30	36	30.00
High_13	2472	0.16	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	20.11	20.11	30.00	-9.89
Mid	2437	21.02	21.02	30.00	-8.98
High_11	2462	20.44	20.44	30.00	-9.56
High_12	2467	20.48	20.48	30.00	-9.52
High_13	2472	18.33	18.33	30.00	-11.67

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS for Chain 1

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	1.40	30.00	30	36	30.00
Mid	2437	1.40	30.00	30	36	30.00
High_11	2462	1.40	30.00	30	36	30.00
High_12	2467	1.40	30.00	30	36	30.00
High_13	2472	1.40	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power

Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	20.03	20.03	30.00	-9.97
Mid	2437	20.83	20.83	30.00	-9.17
High_11	2462	20.39	20.39	30.00	-9.61
High_12	2467	20.46	20.46	30.00	-9.54
High_13	2472	18.52	18.52	30.00	-11.48

.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted form the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

RESULTS for Chain 0

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.06	-5.06	8.0	-13.1
Mid	2437	-3.54	-3.54	8.0	-11.5
High_11	2462	-4.74	-4.74	8.0	-12.7
High_12	2467	-4.78	-4.78	8.0	-12.8
High_13	2472	-6.99	-6.99	8.0	-15.0

RESULTS for Chain 1

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.43	-5.43	8.0	-13.4
Mid	2437	-4.06	-4.06	8.0	-12.1
High_11	2462	-4.94	-4.94	8.0	-12.9
High_12	2467	-4.74	-4.74	8.0	-12.7
High_13	2472	-6.95	-6.95	8.0	-15.0

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0

PSD, Chain 0 LOW CH

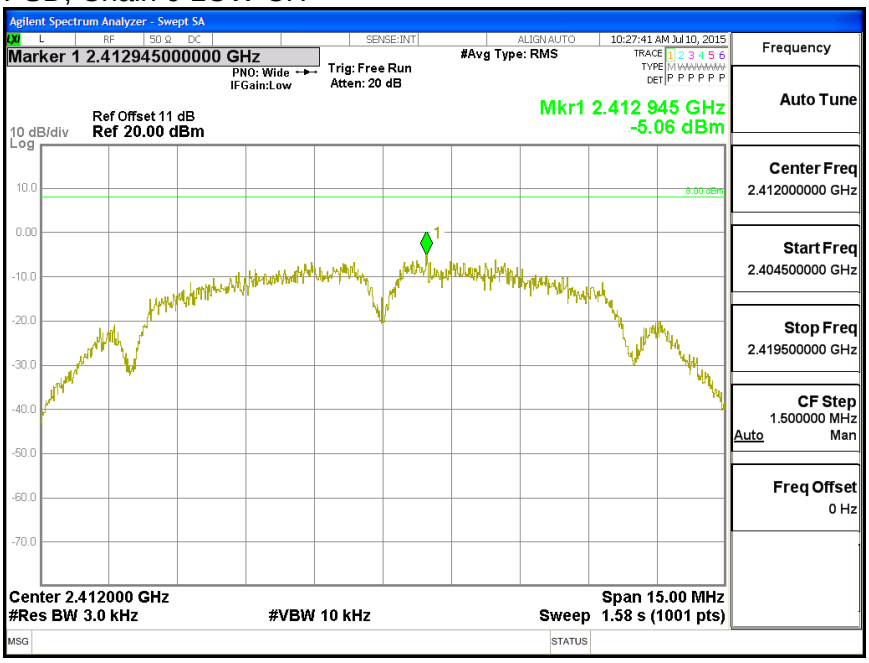

PSD, Chain 0 MID CH

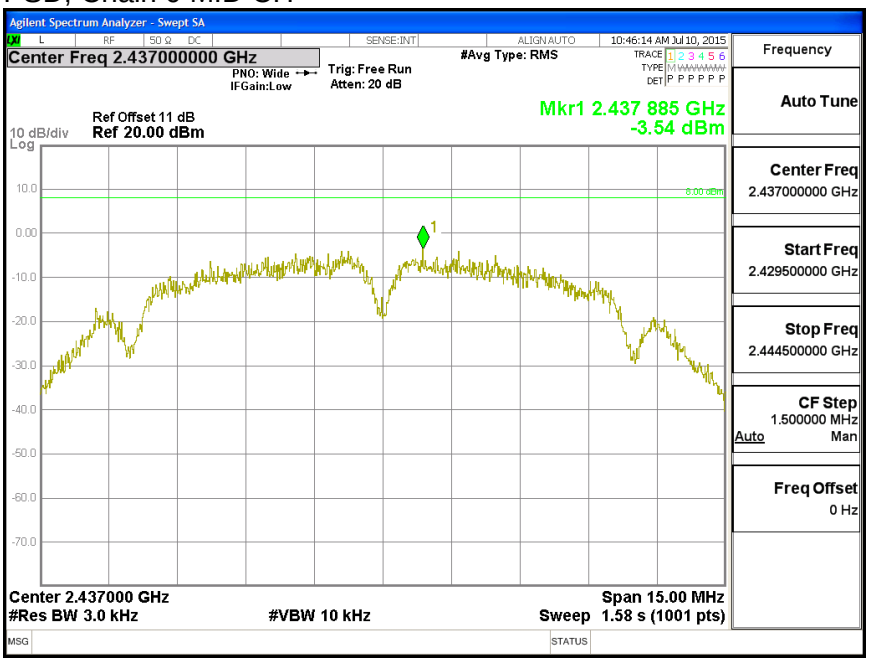

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0 HIGH CH11

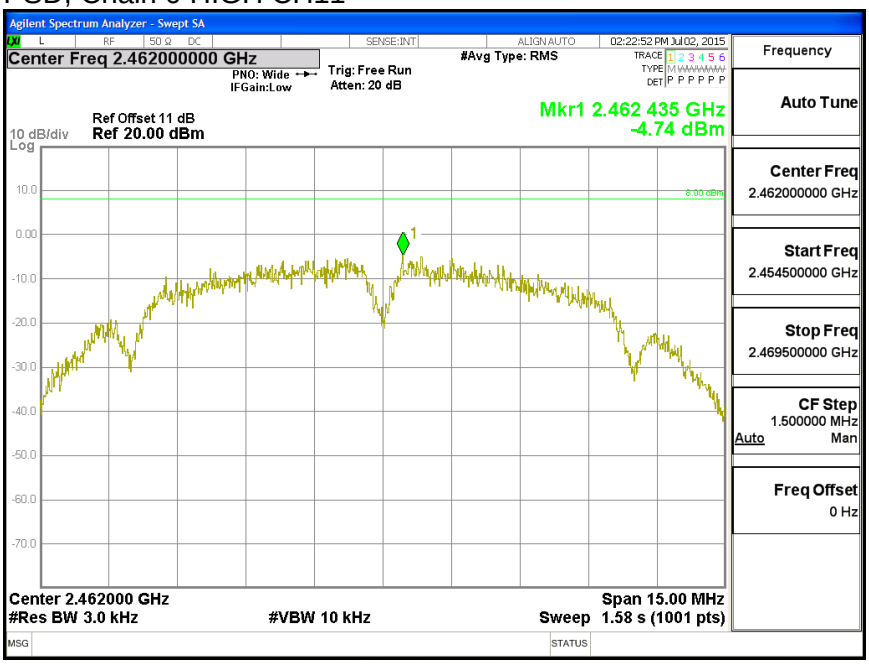

PSD, Chain 0 HIGH CH12

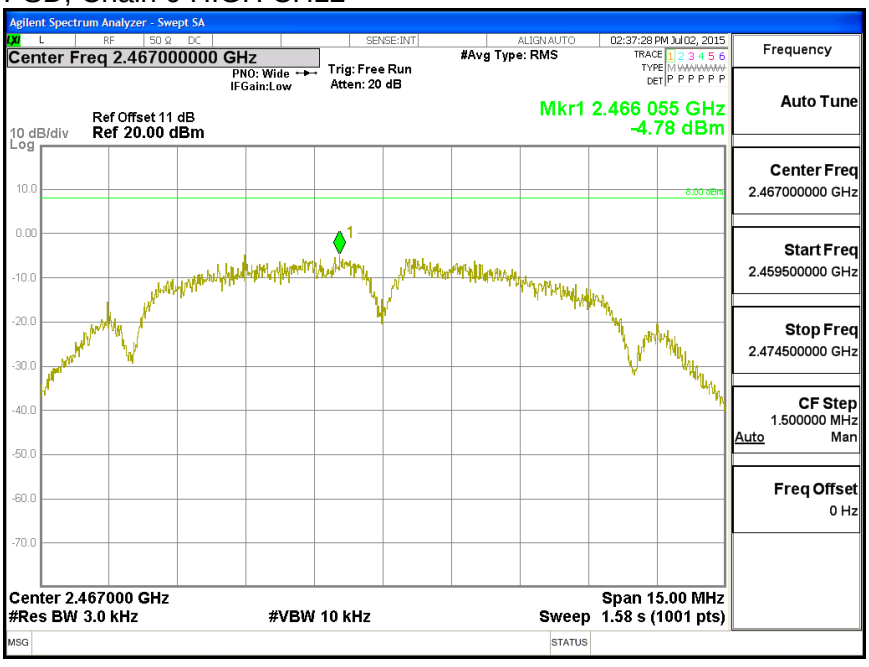

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0 HIGH CH13

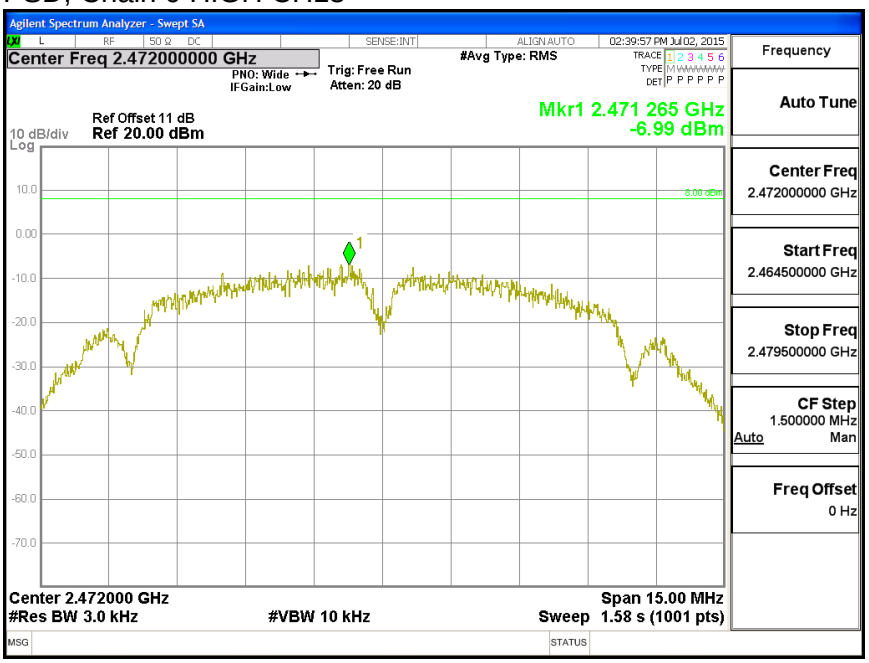

PSD, Chain 1

PSD, Chain 1 LOW CH

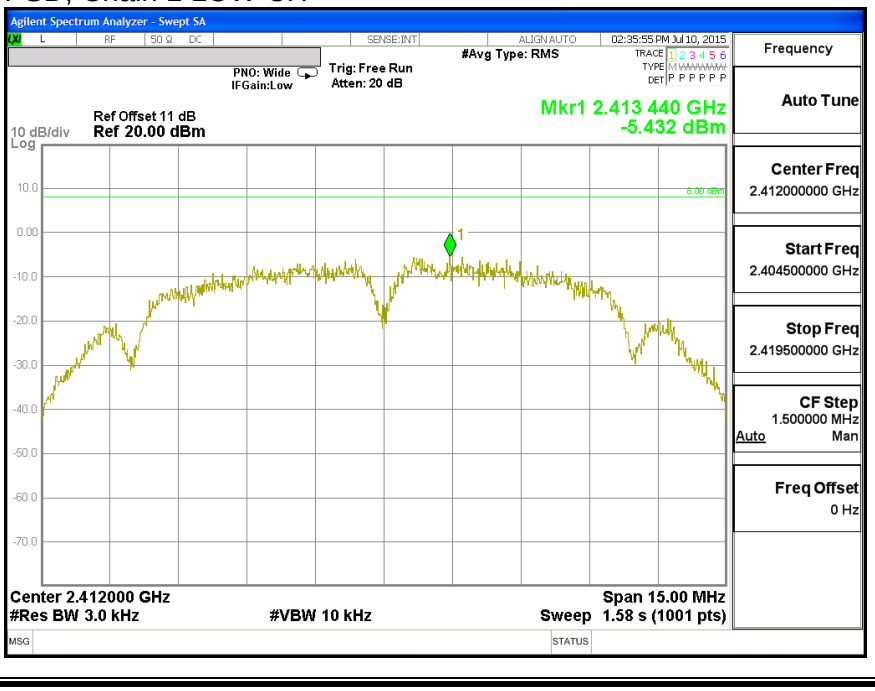

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 1 MID CH

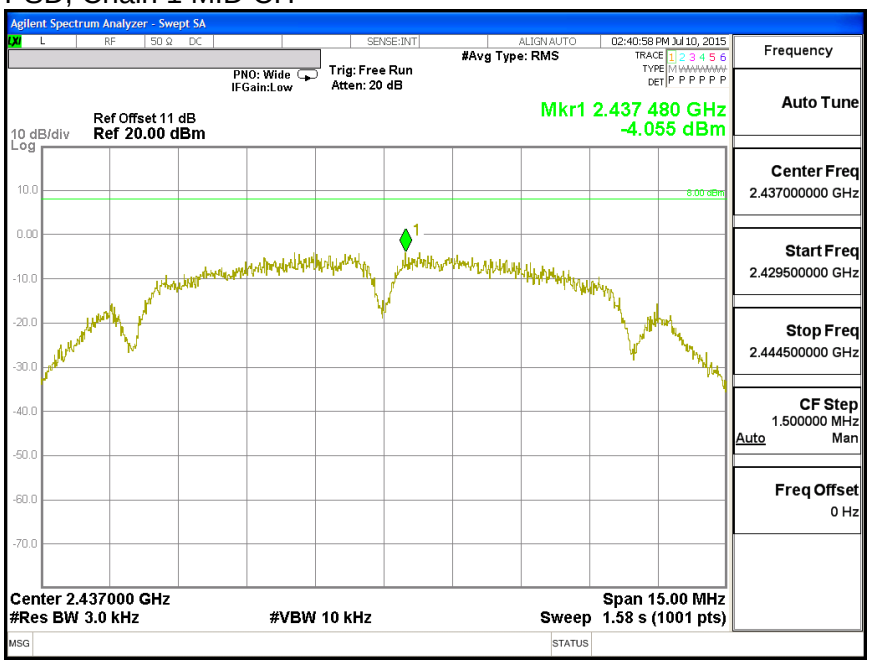

PSD, Chain 1 HIGH CH11

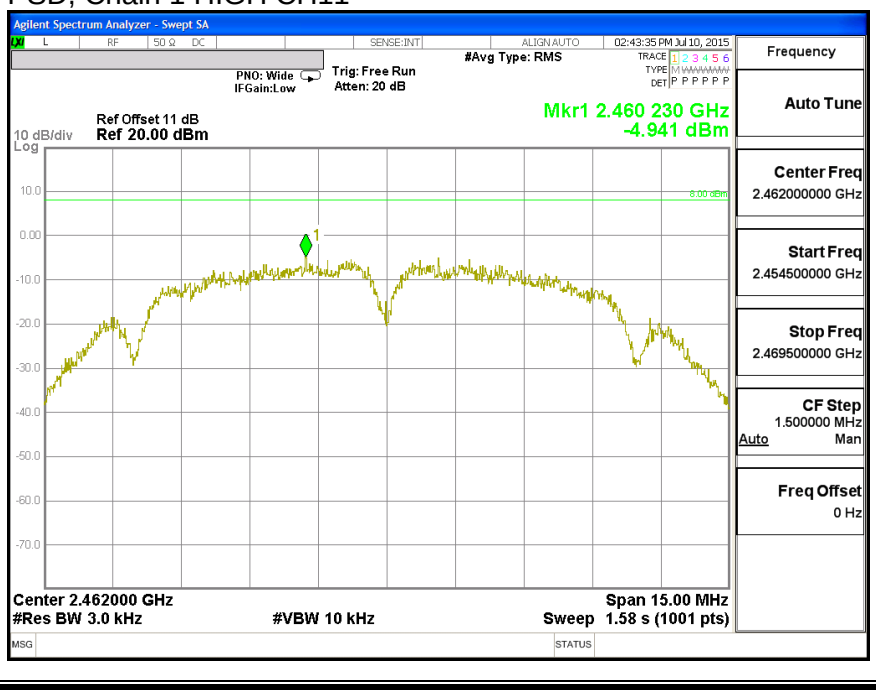

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 1 HIGH CH12

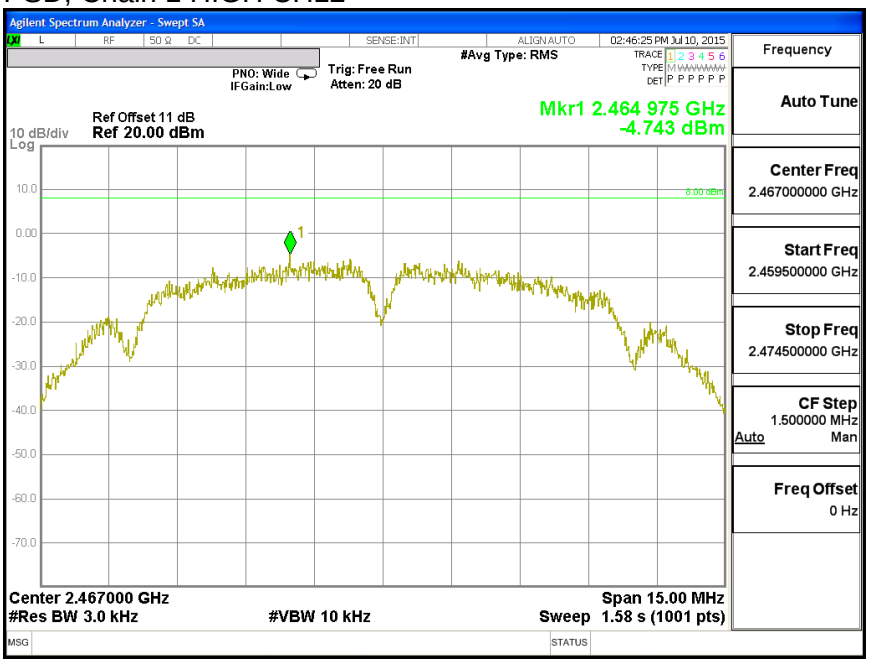

PSD, Chain 1 HIGH CH13

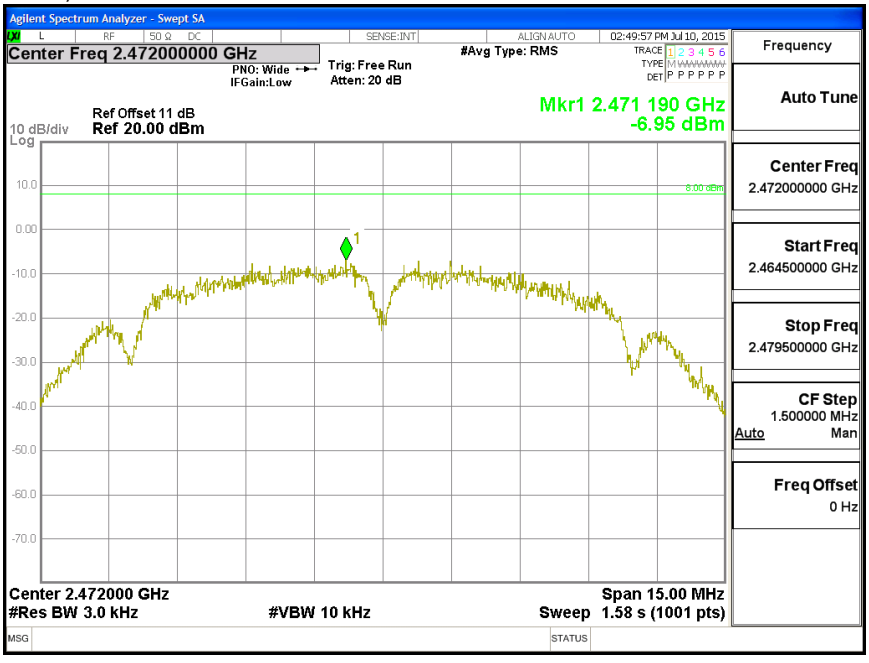

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2.6. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS for Chain 0

LOW CHANNEL BANDEDGE

AUTHORIZED BAND EDGE LOW CH

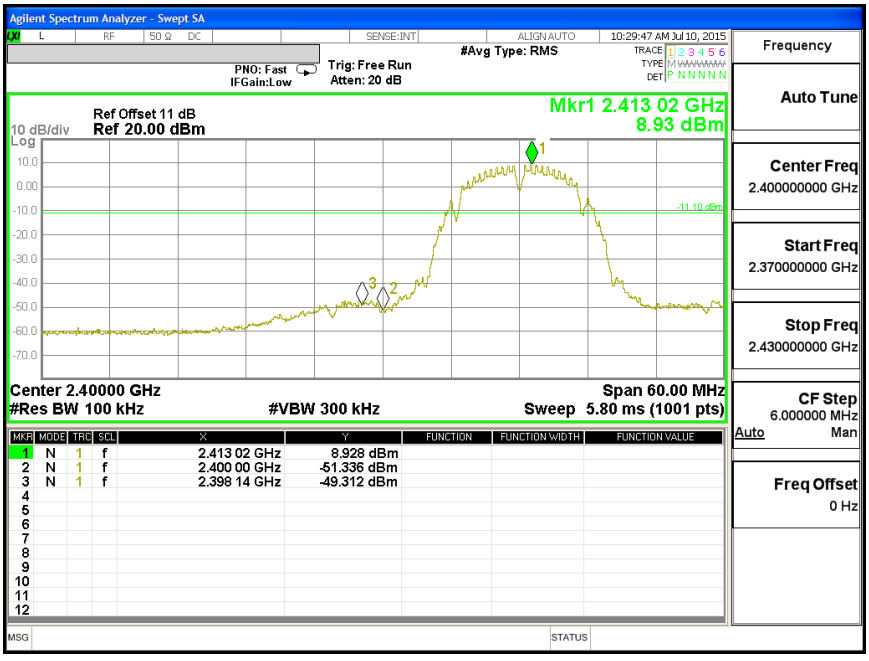

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL BANDEDGE

REFERENCE LEVEL MID CH

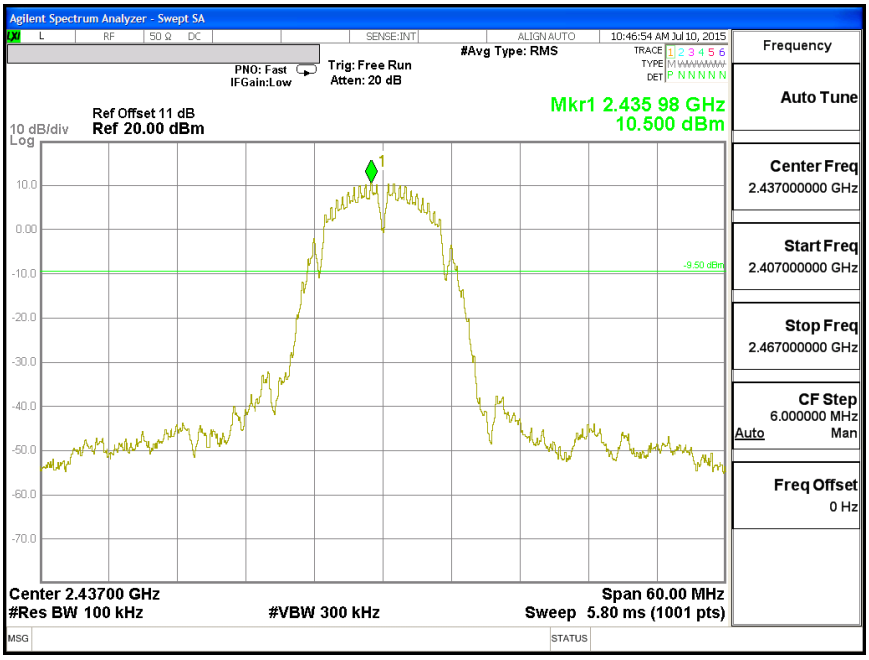

HIGH CHANNEL BANDEDGE

AUTHORIZED BAND EDGE HIGH CH11

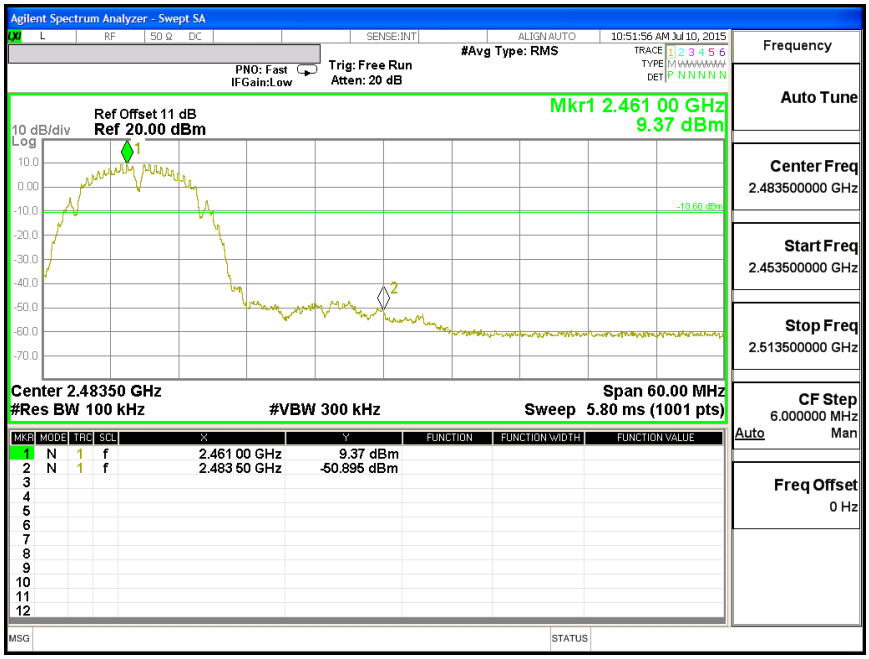

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BAND EDGE HIGH CH12

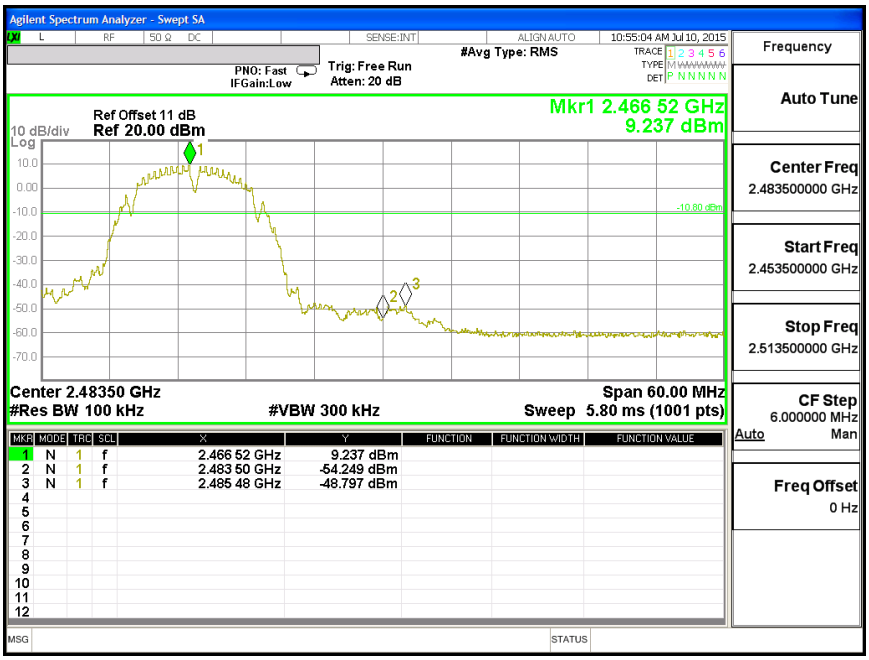

AUTHORIZED BAND EDGE HIGH CH13

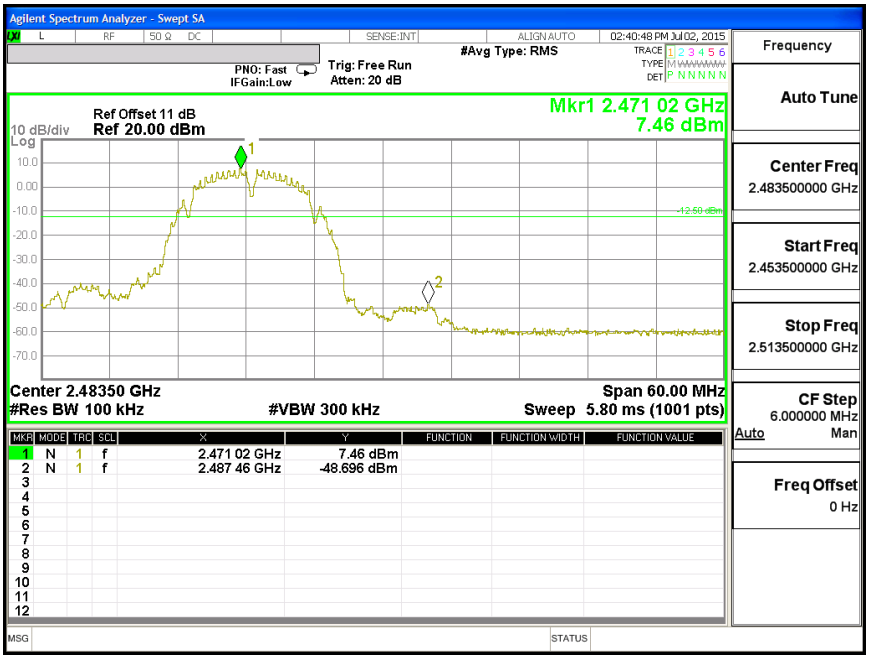

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUT-OF-BAND EMISSIONS

OUT OF BAND LOW CH

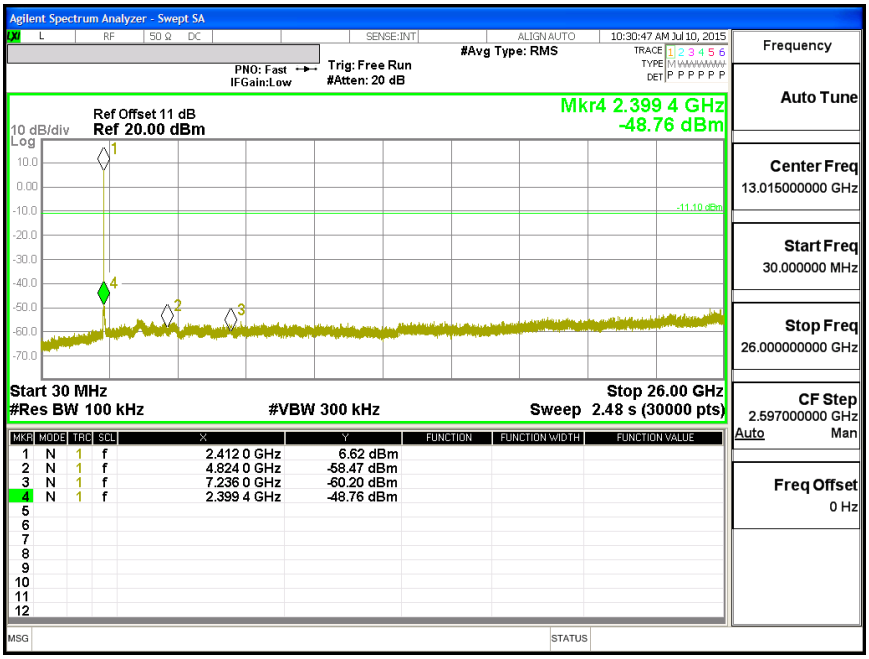

OUT OF BAND MID CH

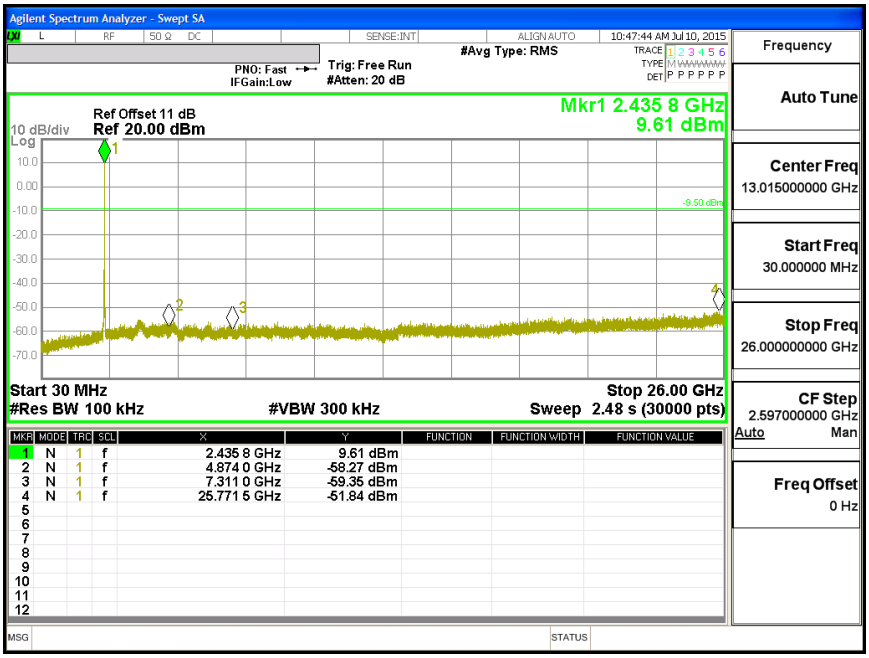

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUT OF BAND HIGH CH11

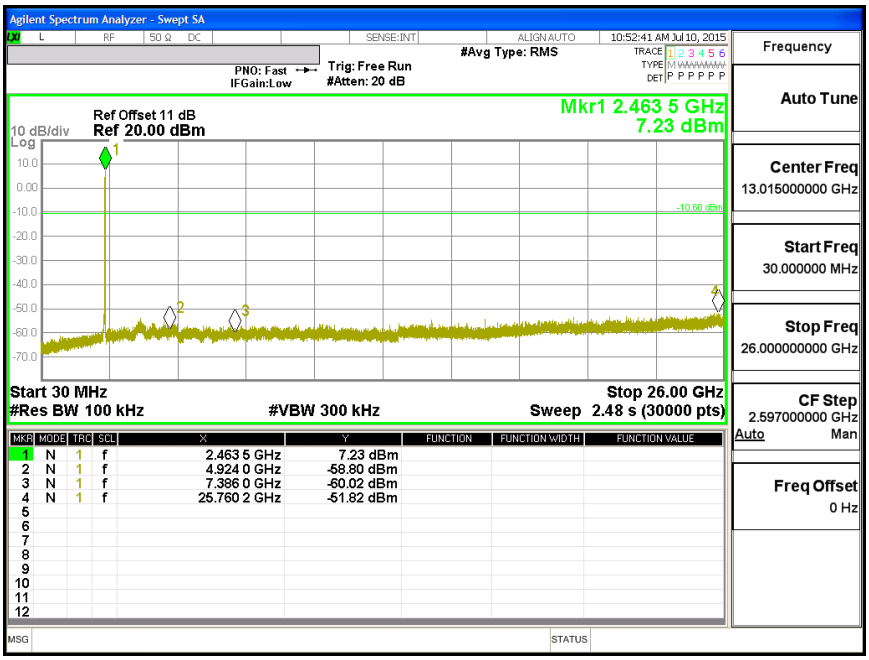

OUT OF BAND HIGH CH12

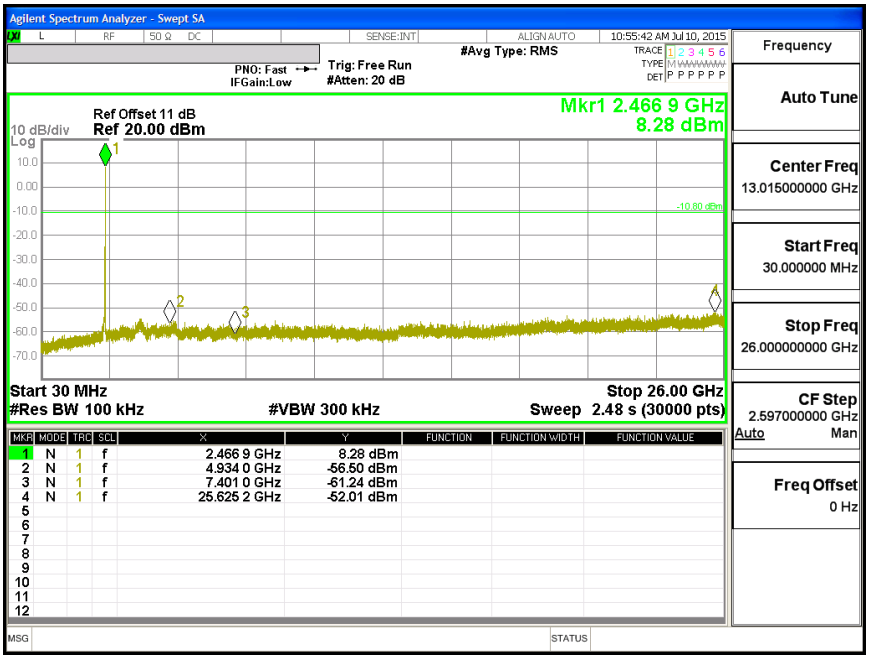

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUT OF BAND HIGH CH13

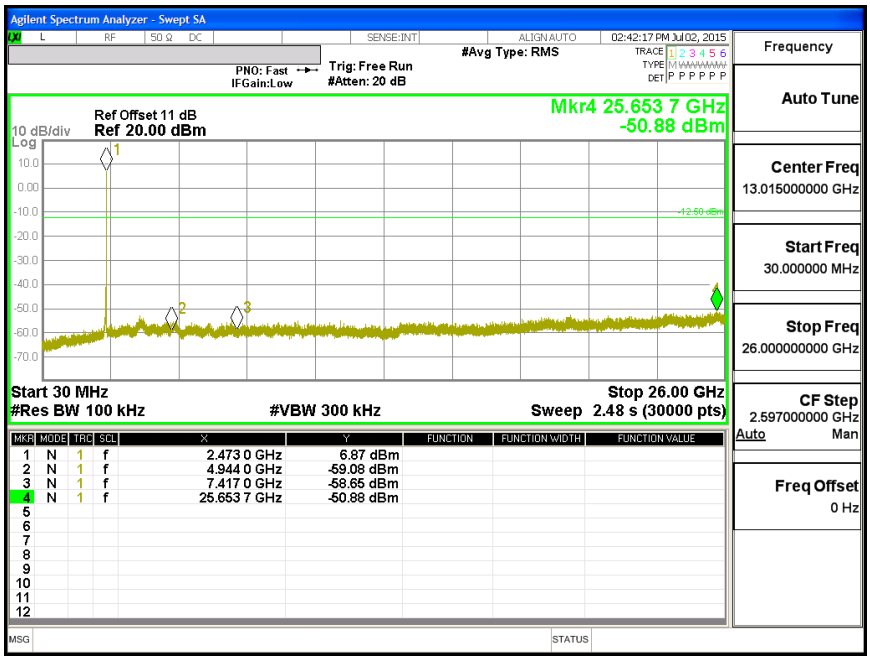

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS for Chain 1

LOW CHANNEL BANDEDGE

AUTHORIZED BAND EDGE LOW CH

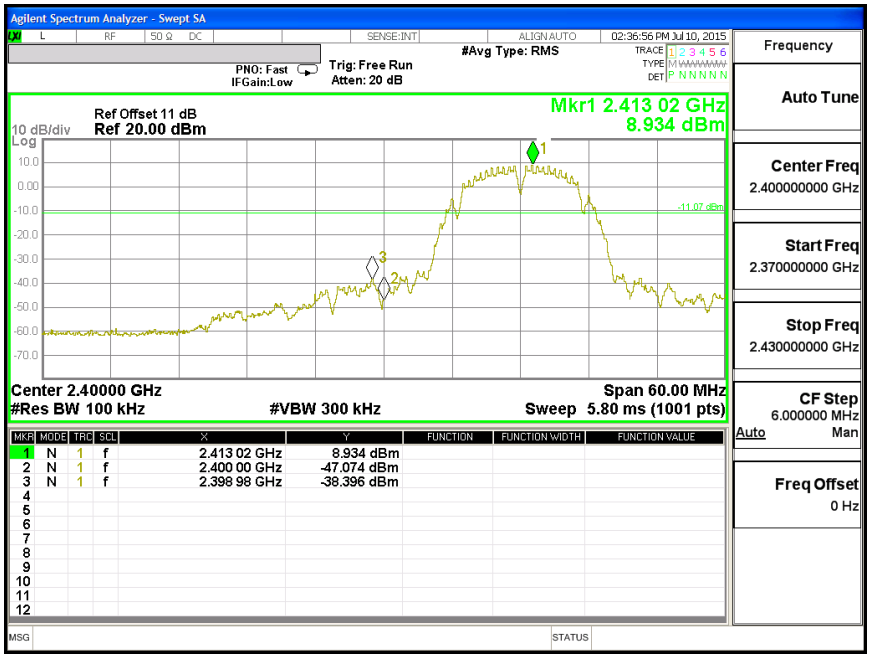

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL BANDEDGE

REFERENCE LEVEL MID CH

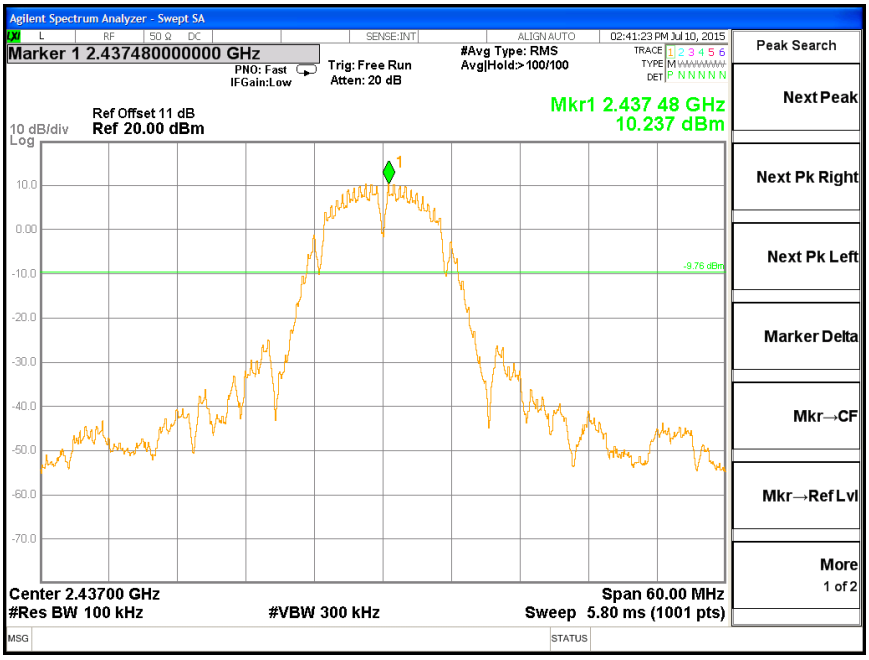

HIGH CHANNEL BANDEDGE

AUTHORIZED BAND EDGE HIGH CH11

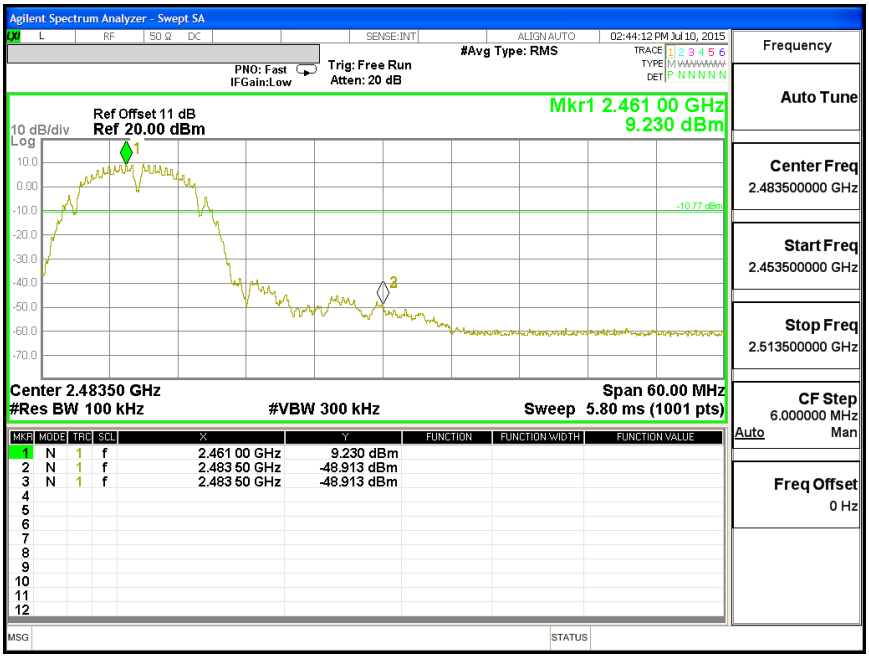

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BAND EDGE HIGH CH12

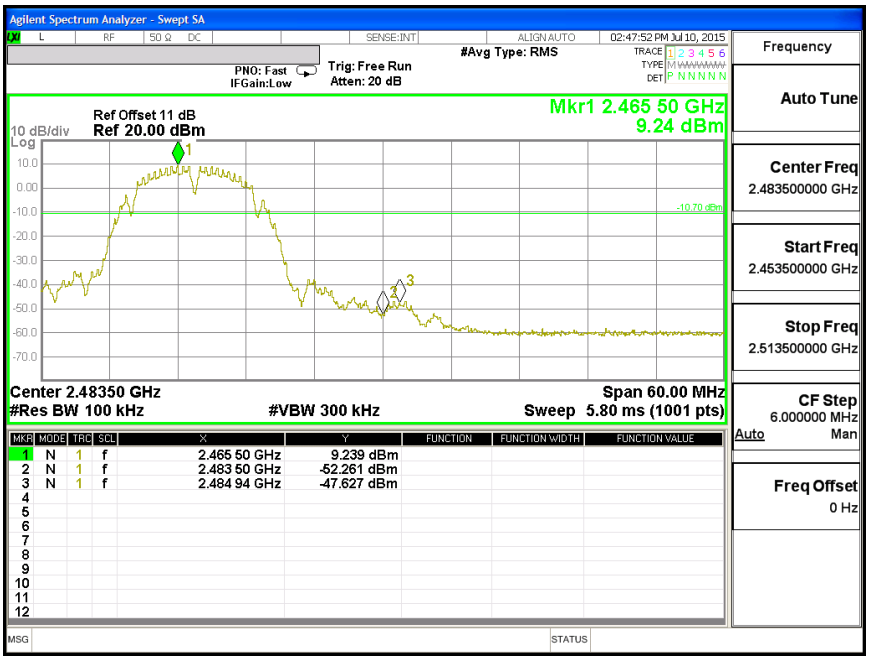

AUTHORIZED BAND EDGE HIGH CH13

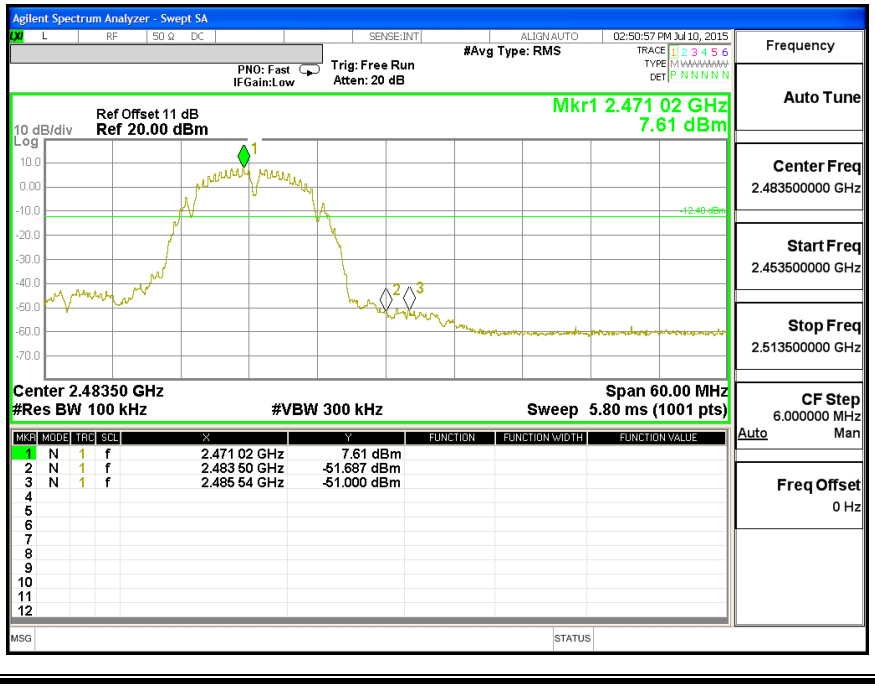

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUT-OF-BAND EMISSIONS

OUT OF BAND LOW CH

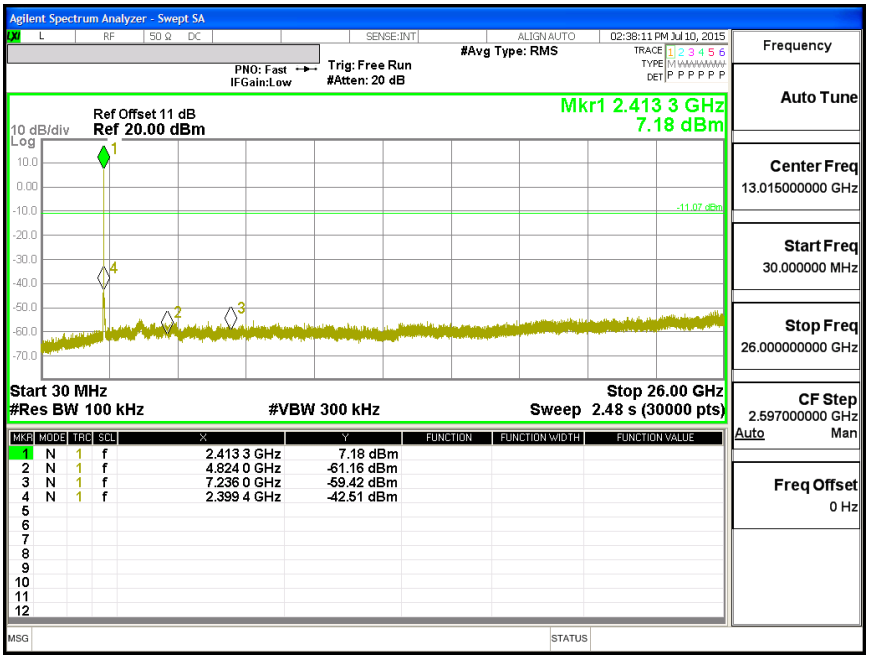

OUT OF BAND MID CH

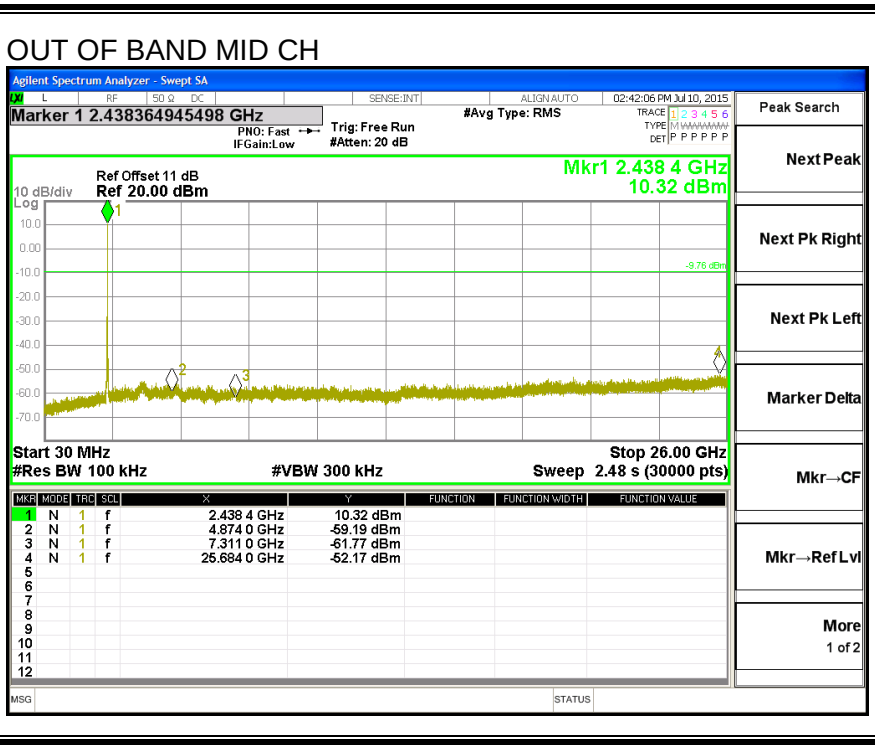

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUT OF BAND HIGH CH11

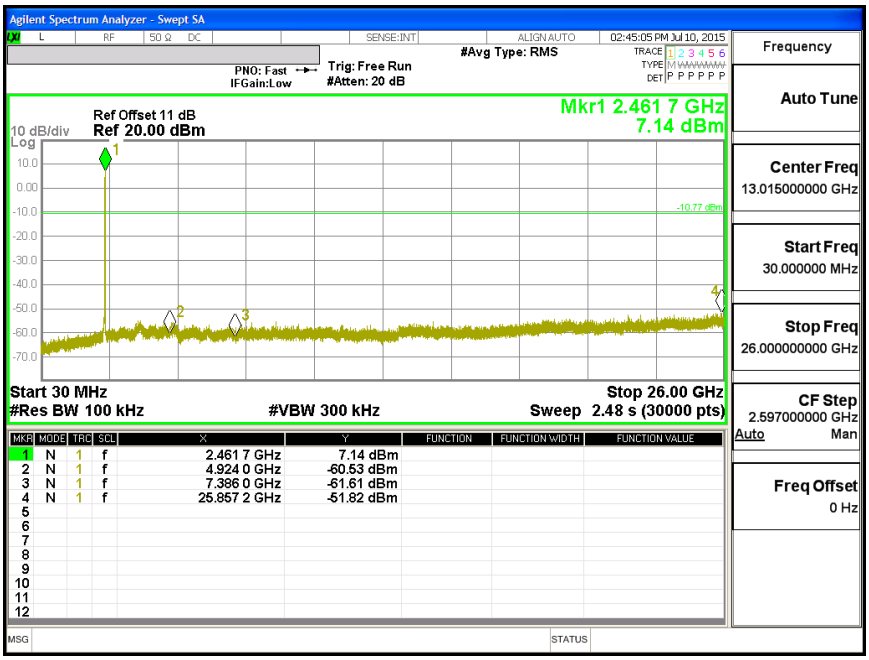

OUT OF BAND HIGH CH12

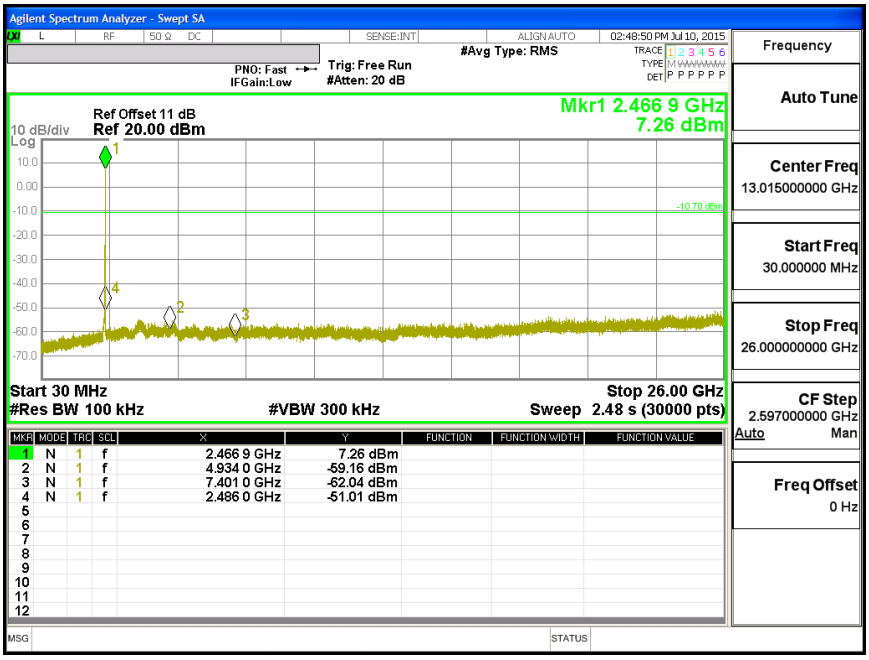

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUT OF BAND HIGH CH13

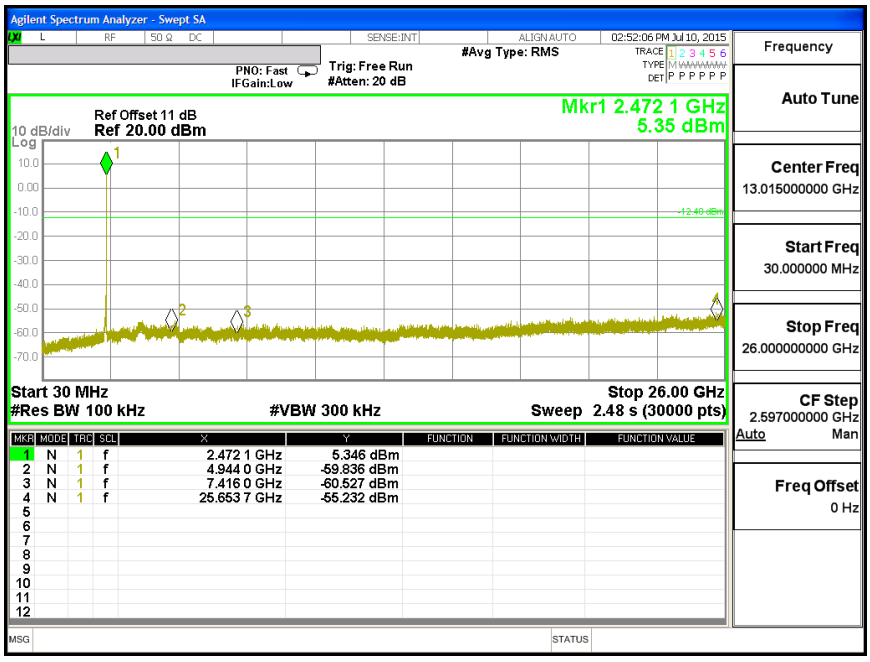

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3. 802.11n HT20 SISO MODE IN THE 2.4 GHz BAND

9.3.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS for Chain 0

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low_1	2412	17.33	0.5
Low_2	2417	17.55	0.5
Low_3	2422	17.60	0.5
Mid	2437	17.63	0.5
High_9	2452	17.58	0.5
High_10	2457	17.55	0.5
High_11	2462	17.21	0.5
High_12	2467	17.20	0.5
High_13	2472	17.15	0.5

RESULTS for Chain 1

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low_1	2412	17.28	0.5
Low_2	2417	17.23	0.5
Low_3	2422	16.69	0.5
Mid	2437	17.58	0.5
High_9	2452	17.63	0.5
High_10	2457	17.63	0.5
High_11	2462	17.58	0.5
High_12	2467	16.63	0.5
High_13	2472	16.40	0.5

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH, Chain 0

6 dB BANDWIDTH LOW CH 1

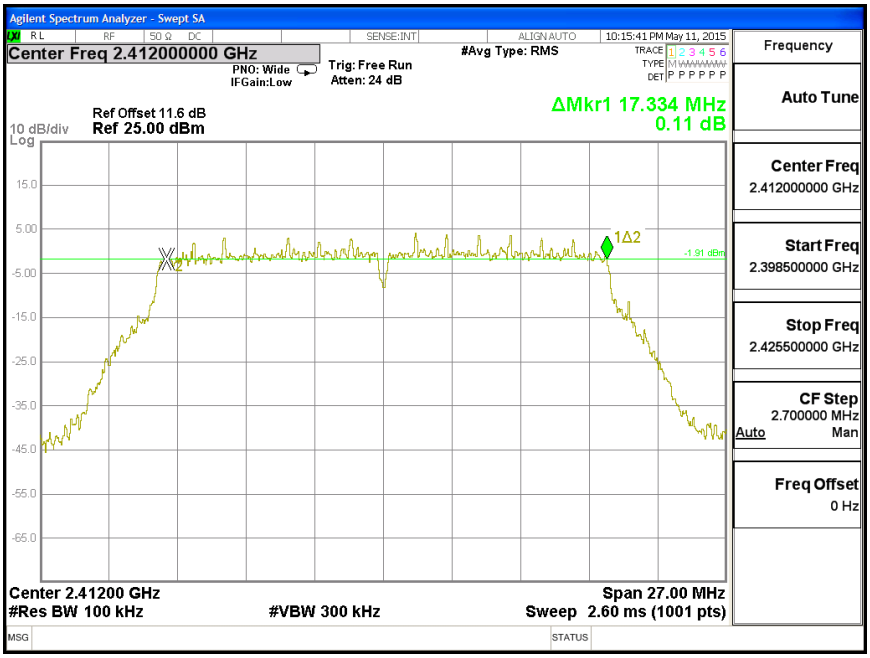

6 dB BANDWIDTH LOW CH 2

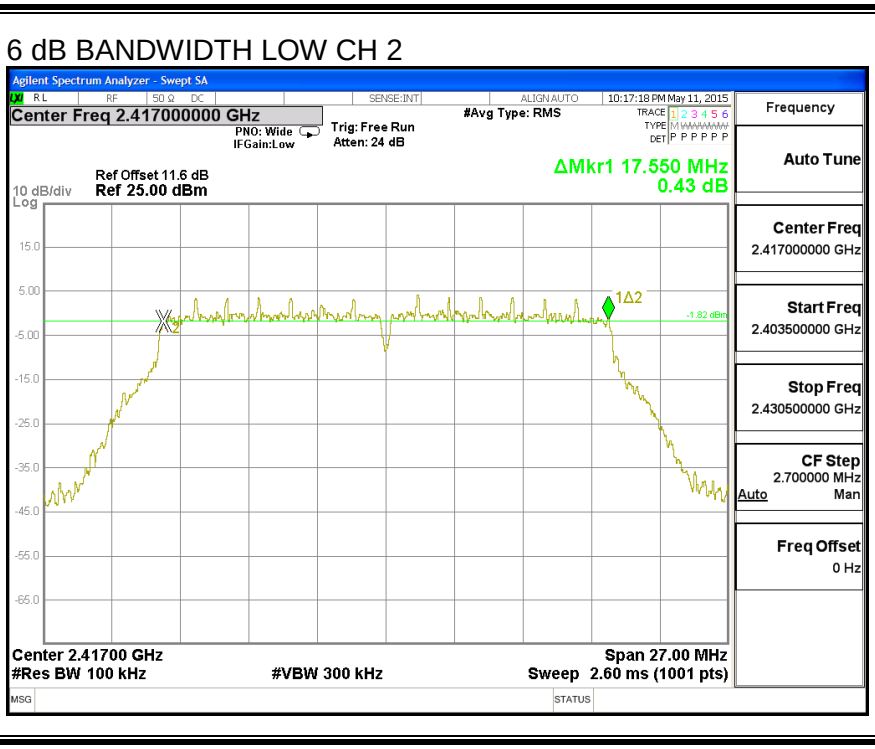

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH LOW CH 3

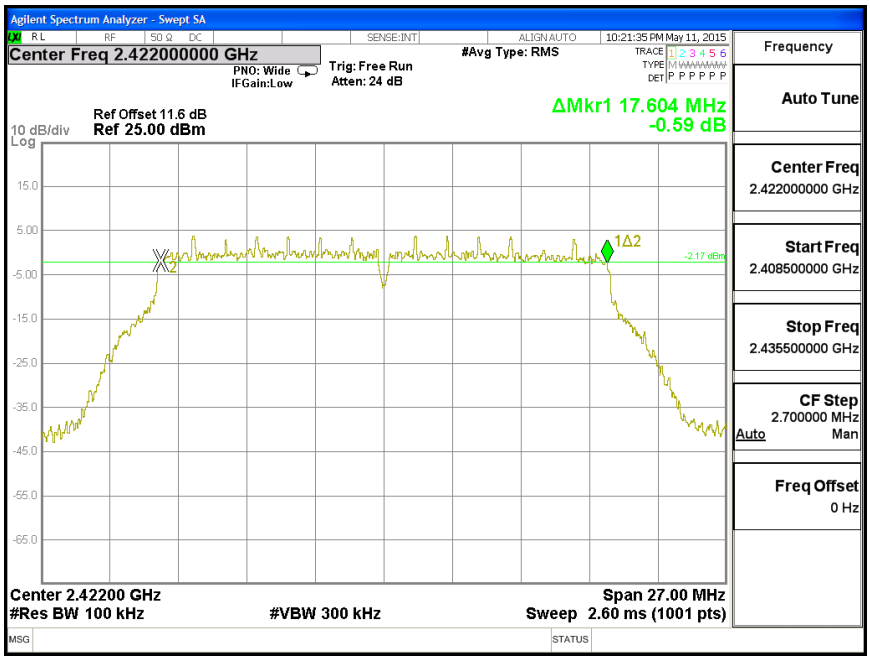

6 dB BANDWIDTH MID CH

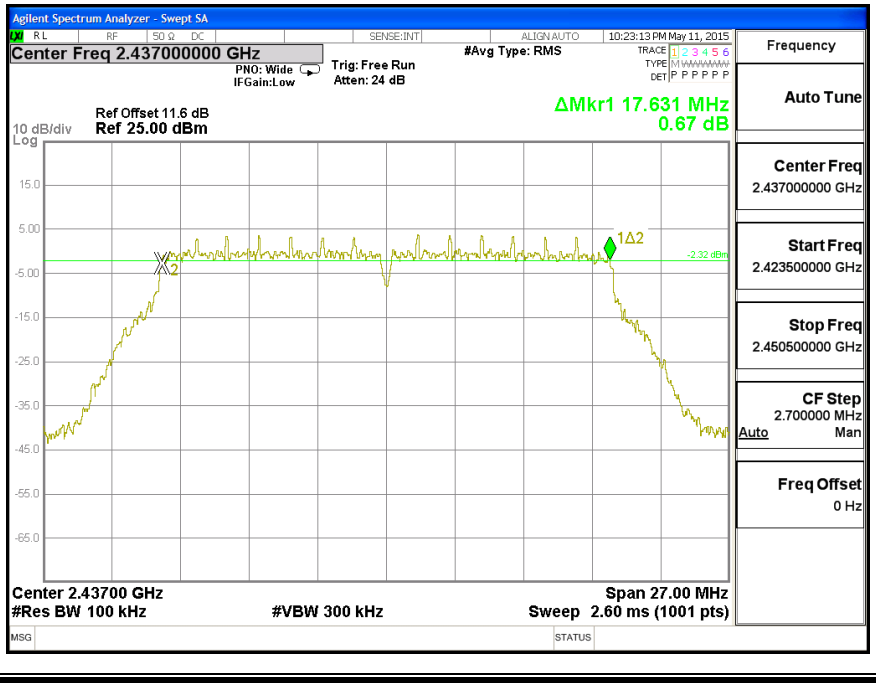

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH HIGH CH9

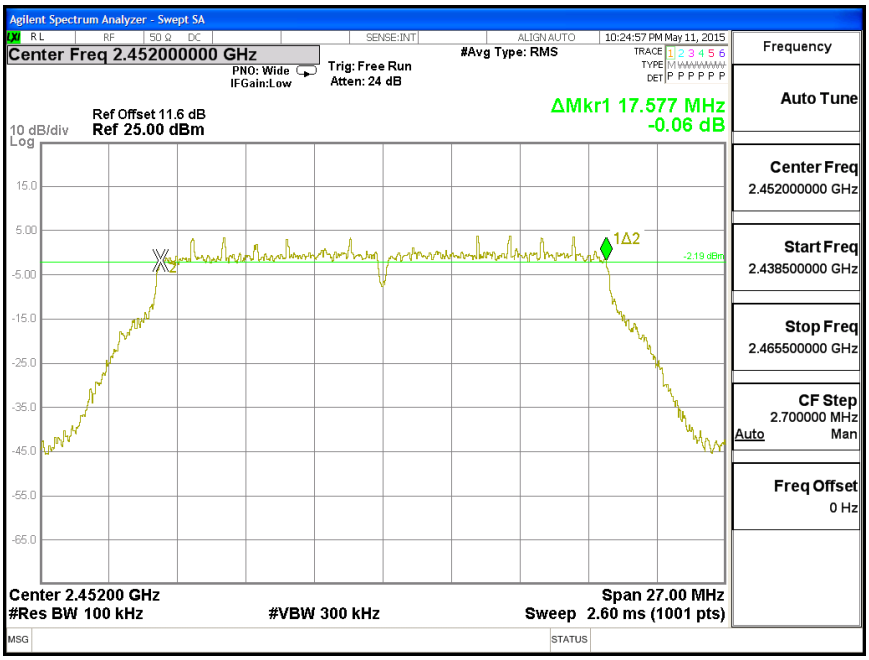

6 dB BANDWIDTH HIGH CH10

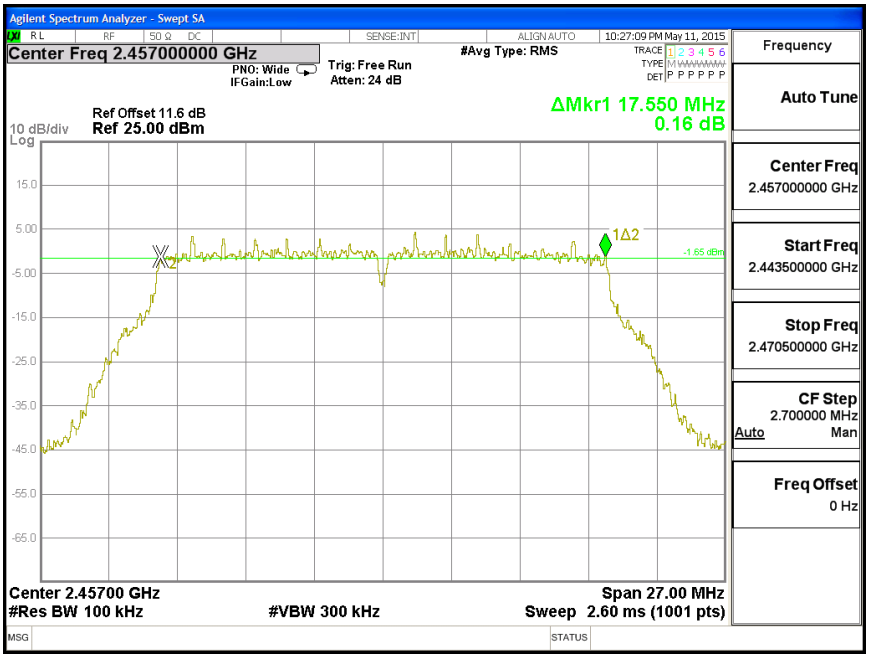

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH HIGH CH11

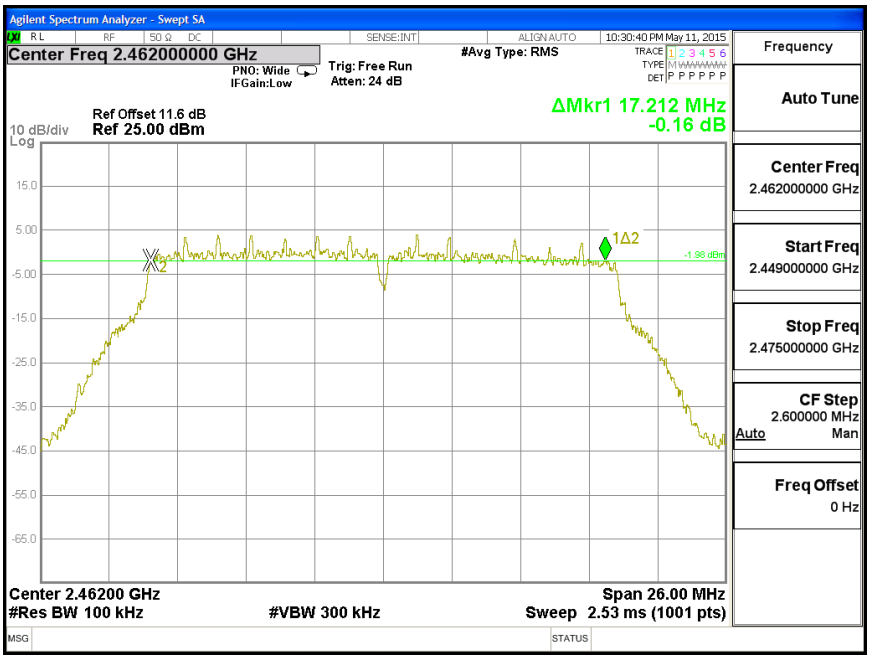

6 dB BANDWIDTH HIGH CH12

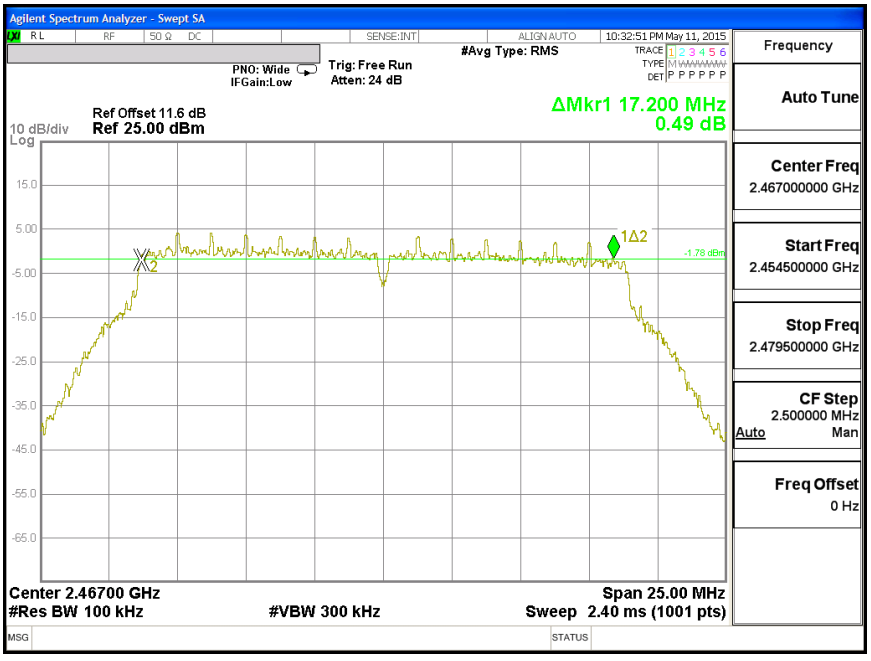

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH HIGH CH13

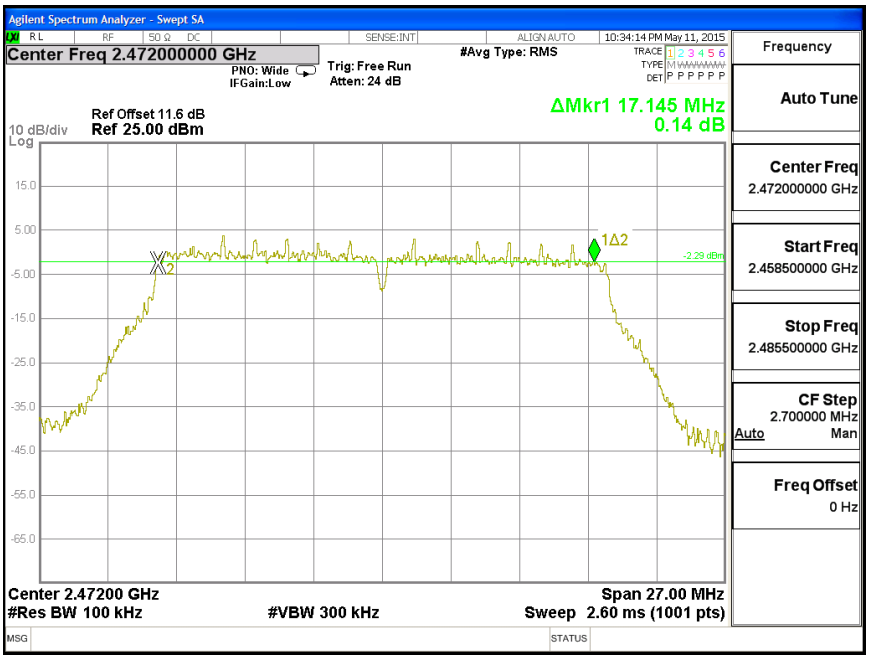

6 dB BANDWIDTH, Chain 1

6 dB BANDWIDTH LOW CH1

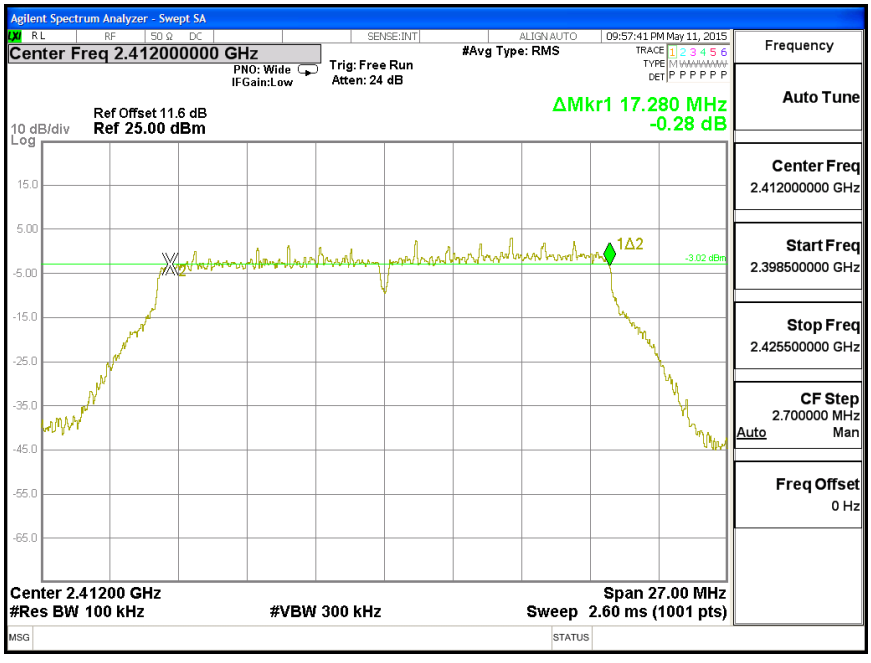

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH LOW CH2

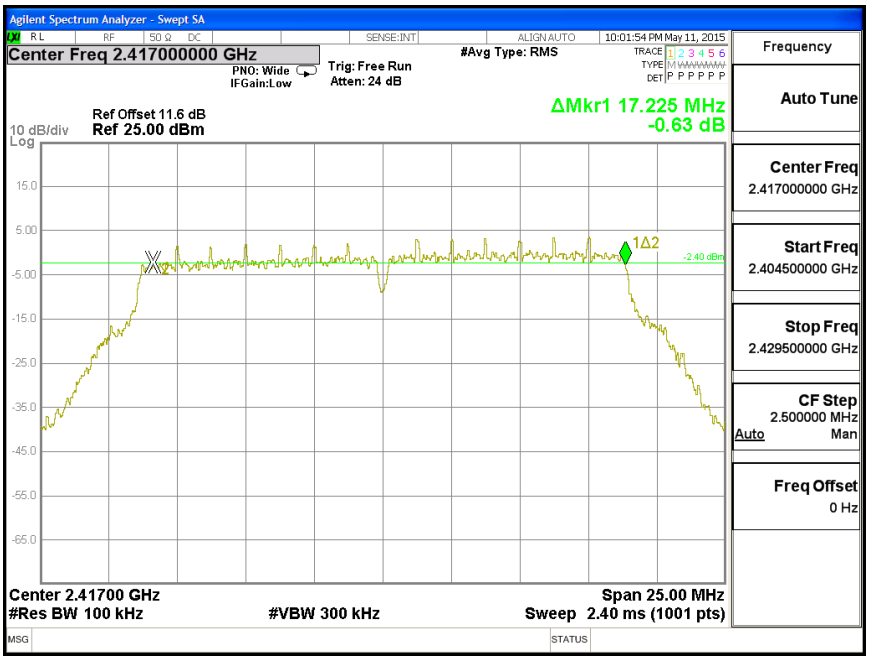

6 dB BANDWIDTH LOW CH3

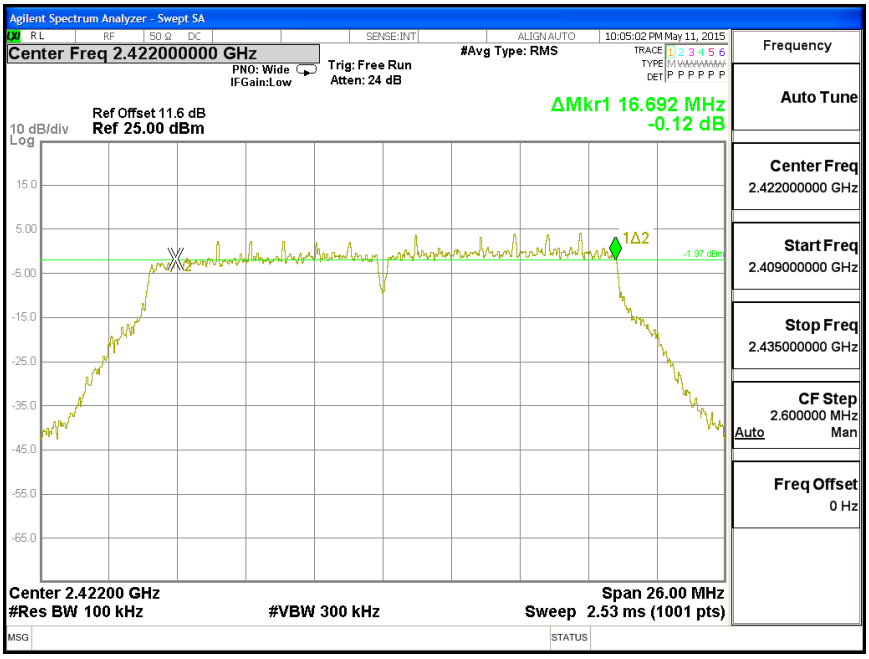

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH MID CH

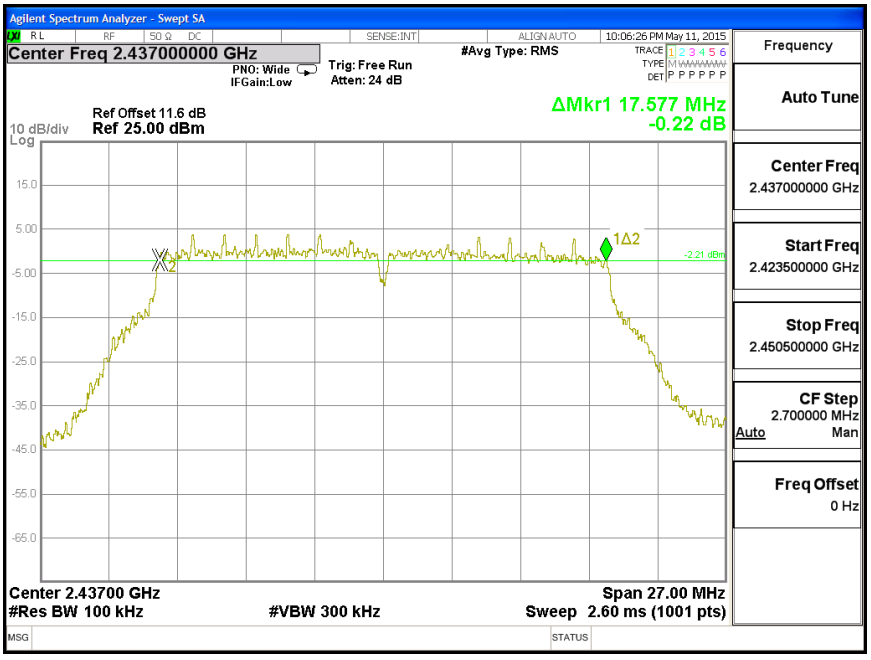

6 dB BANDWIDTH HIGH CH9

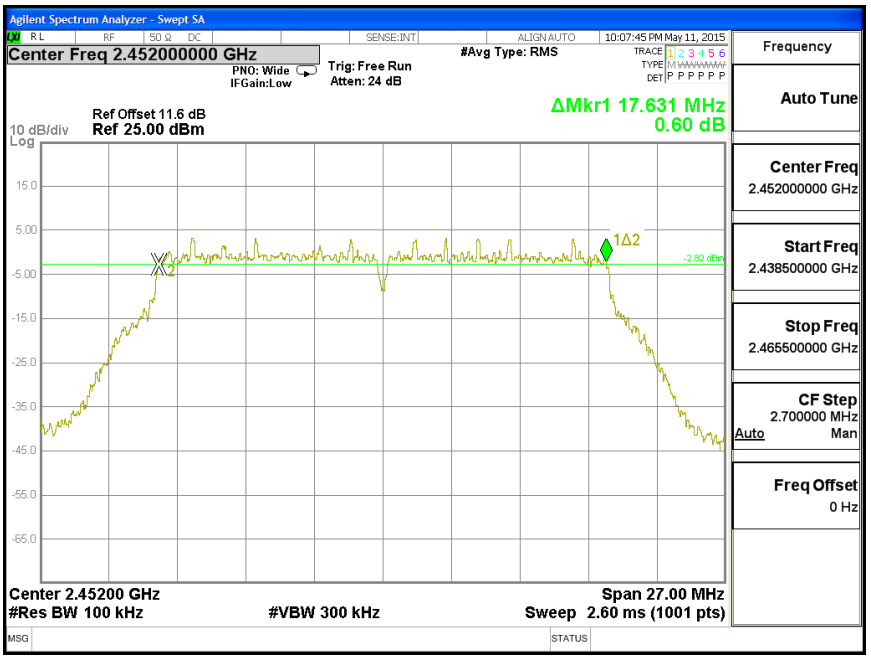

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH HIGH CH10

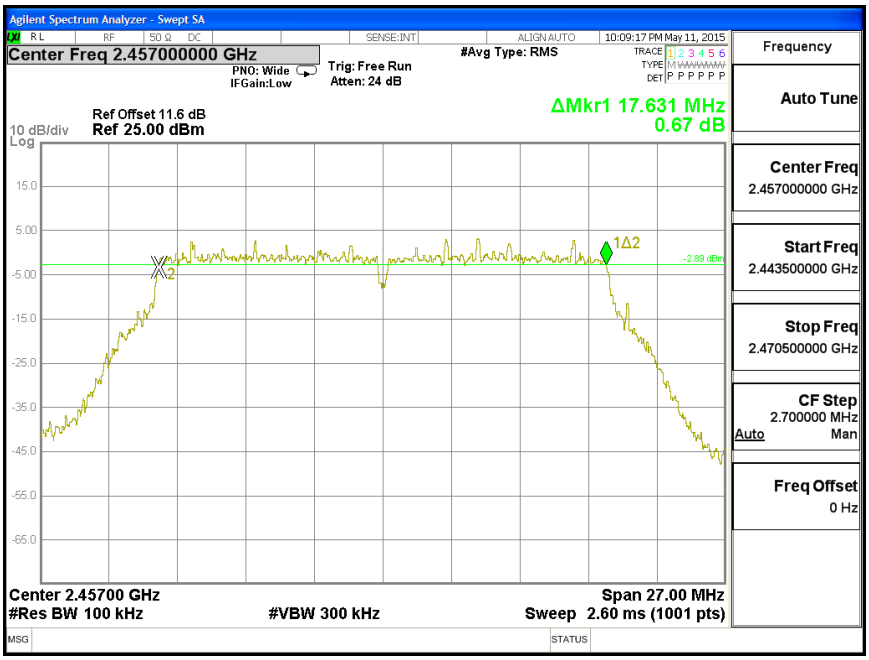

6 dB BANDWIDTH HIGH CH11

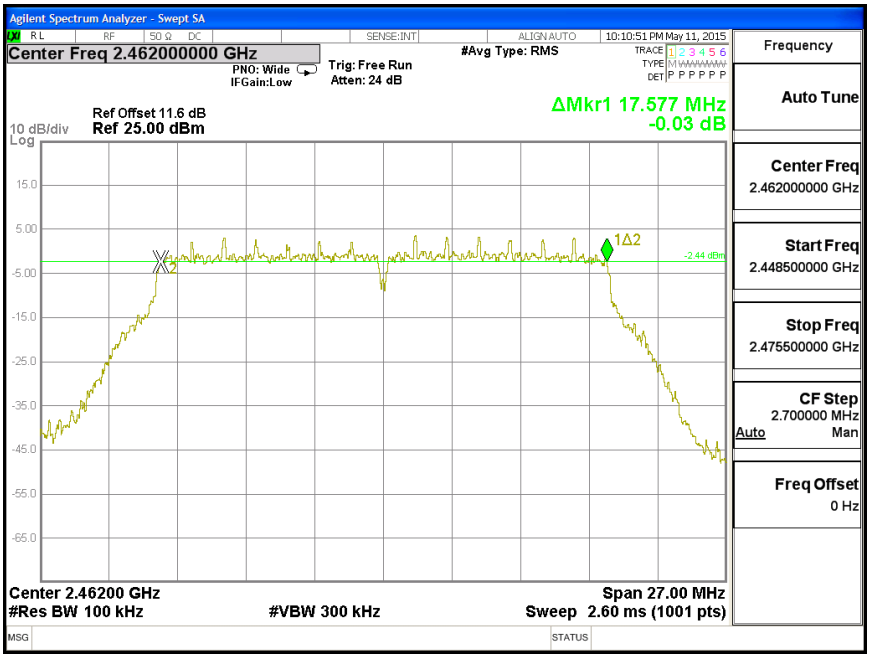

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH HIGH CH12

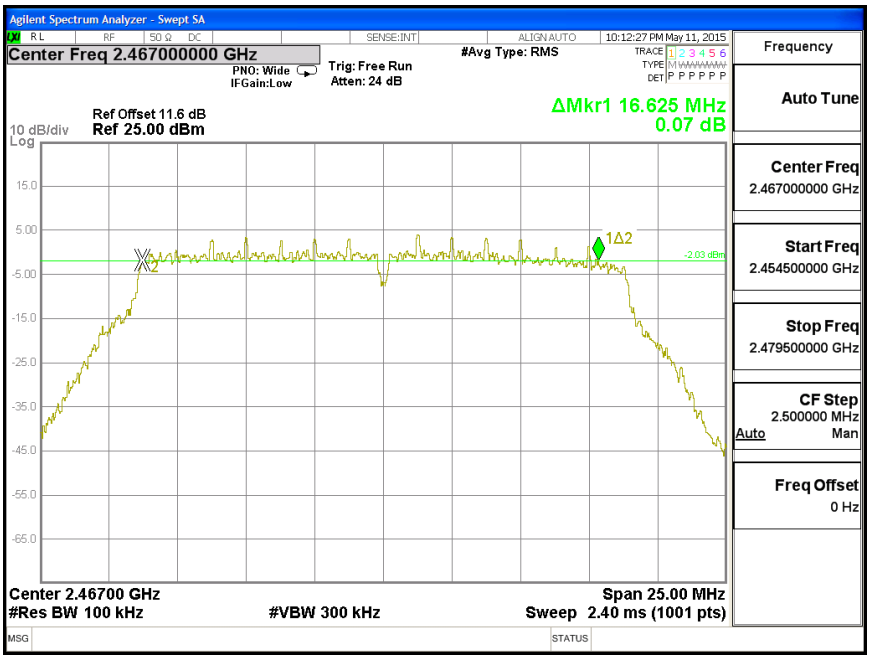

6 dB BANDWIDTH HIGH CH13

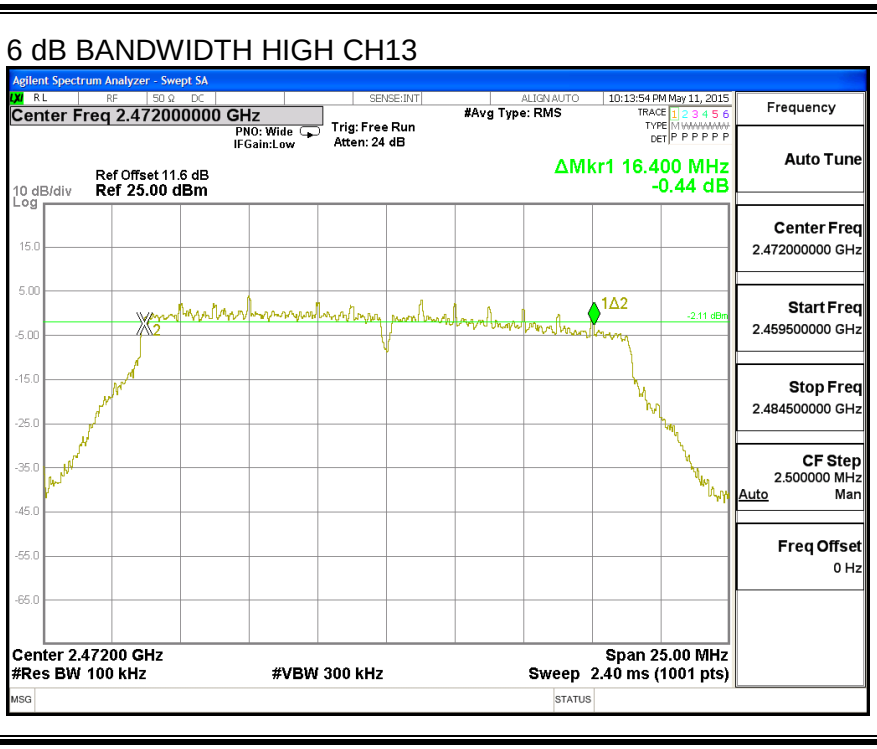

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS for Chain 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low_1	2412	18.067
Low_2	2417	17.860
Low_3	2422	17.761
Mid	2437	17.864
High_9	2452	17.922
High_10	2457	17.703
High_11	2462	17.979
High_12	2467	17.886
High_13	2472	17.708

RESULTS for Chain 1

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low_1	2412	17.763
Low_2	2417	18.049
Low_3	2422	17.888
Mid	2437	17.827
High_9	2452	17.727
High_10	2457	17.907
High_11	2462	17.859
High_12	2467	17.724
High_13	2472	17.684

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, Chain 0

BANDWIDTH LOW CH1

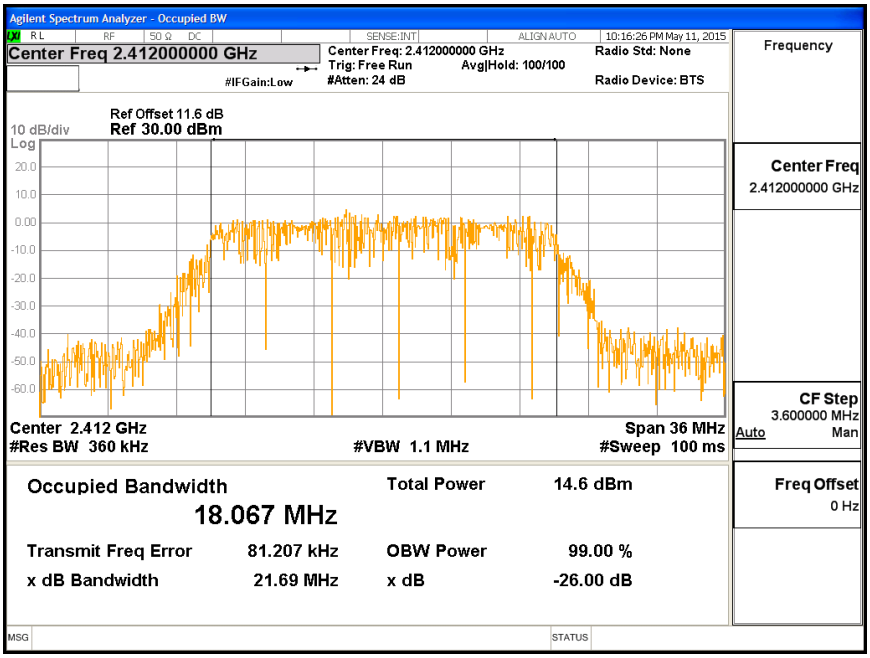

BANDWIDTH LOW CH2

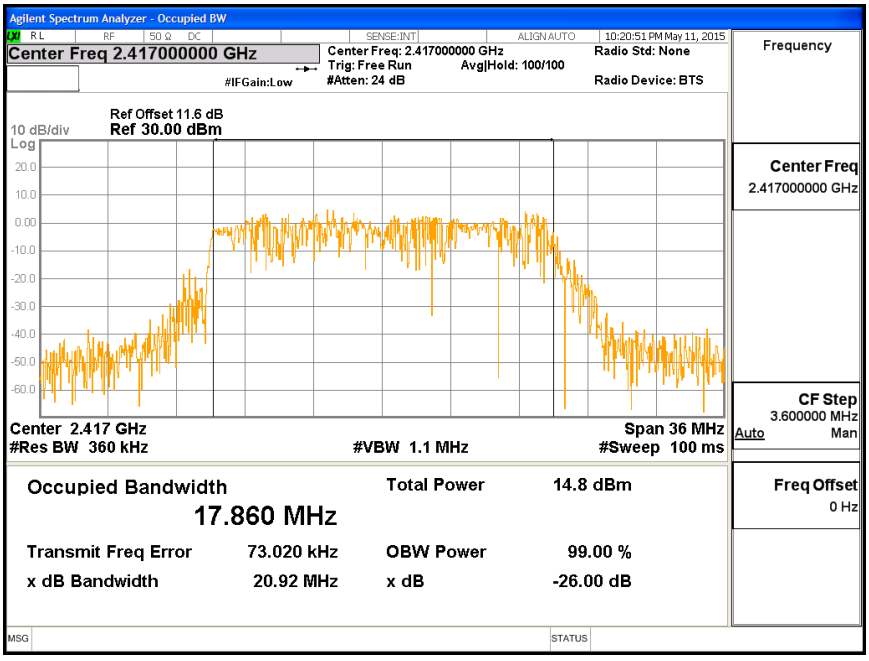

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH LOW CH3

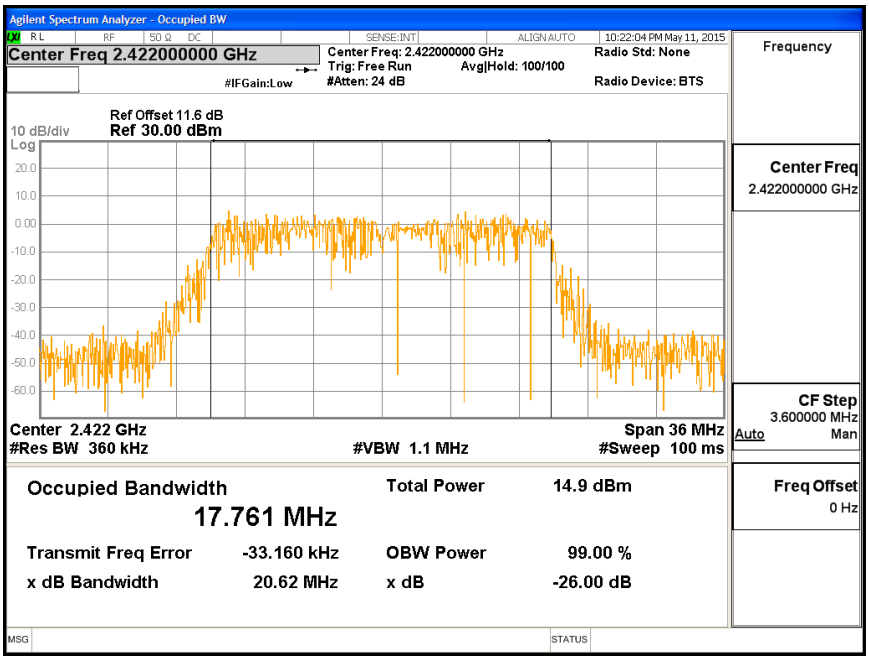

BANDWIDTH MID CH

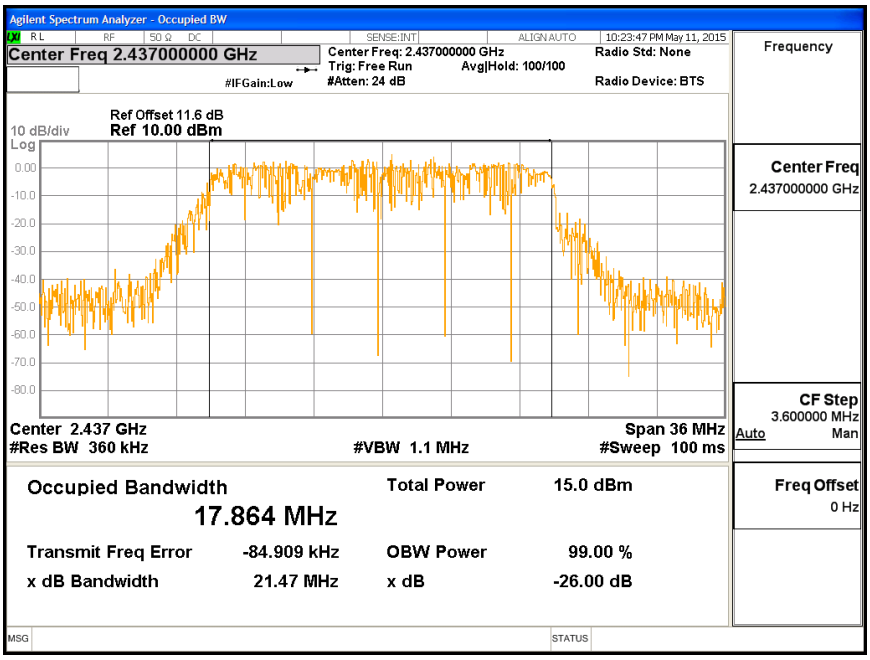

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH 9

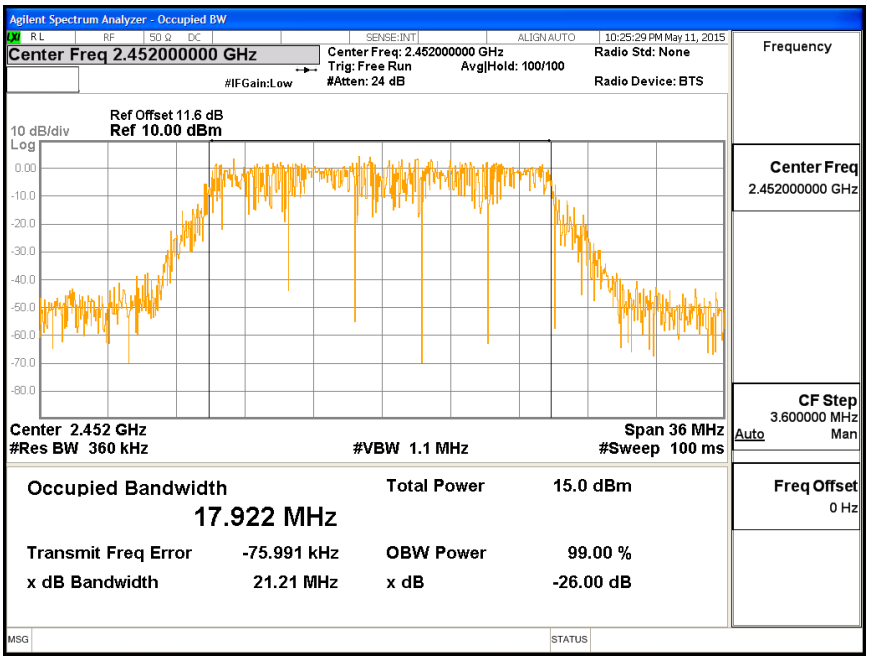

BANDWIDTH HIGH CH10

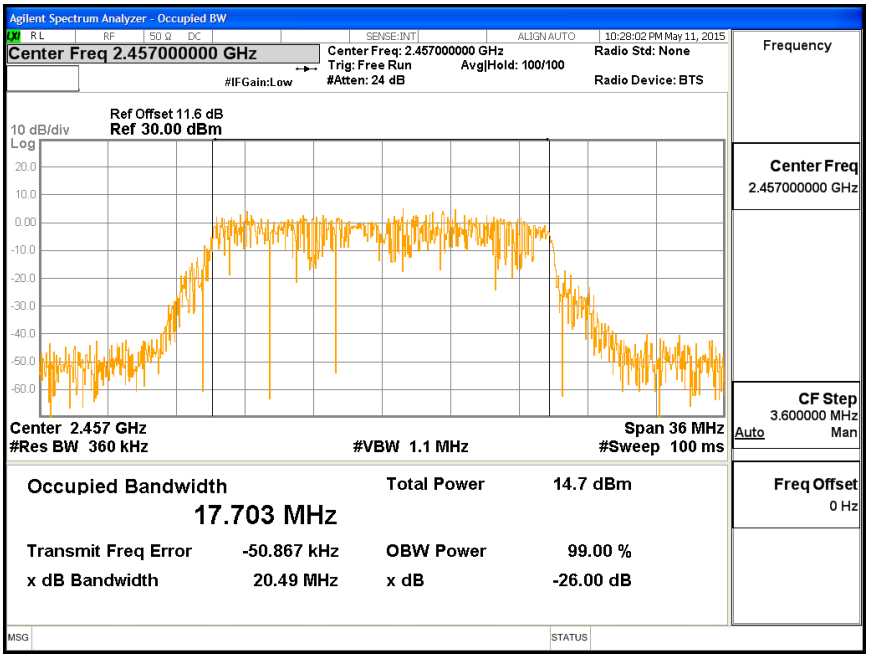

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH 11

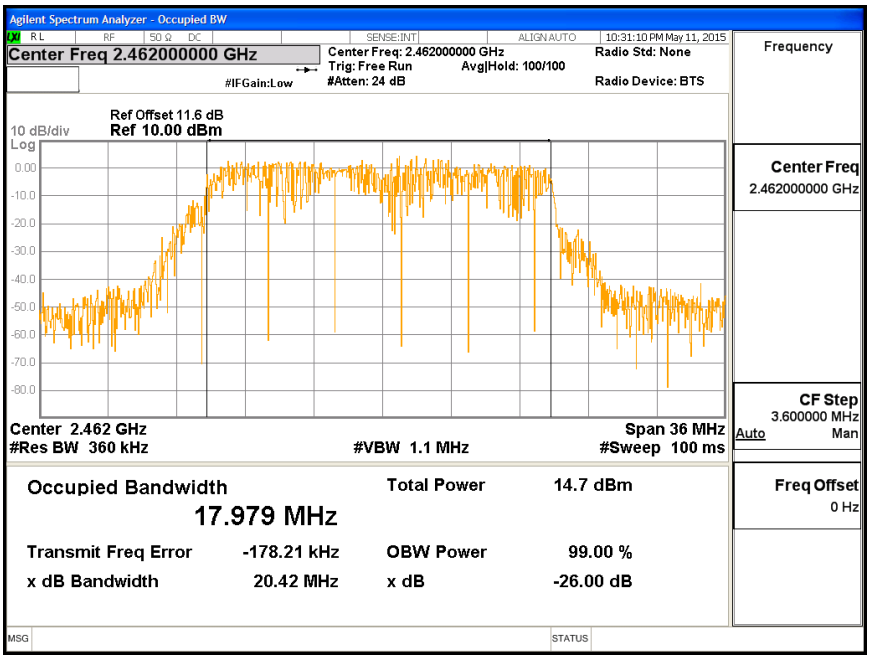

BANDWIDTH HIGH CH 12

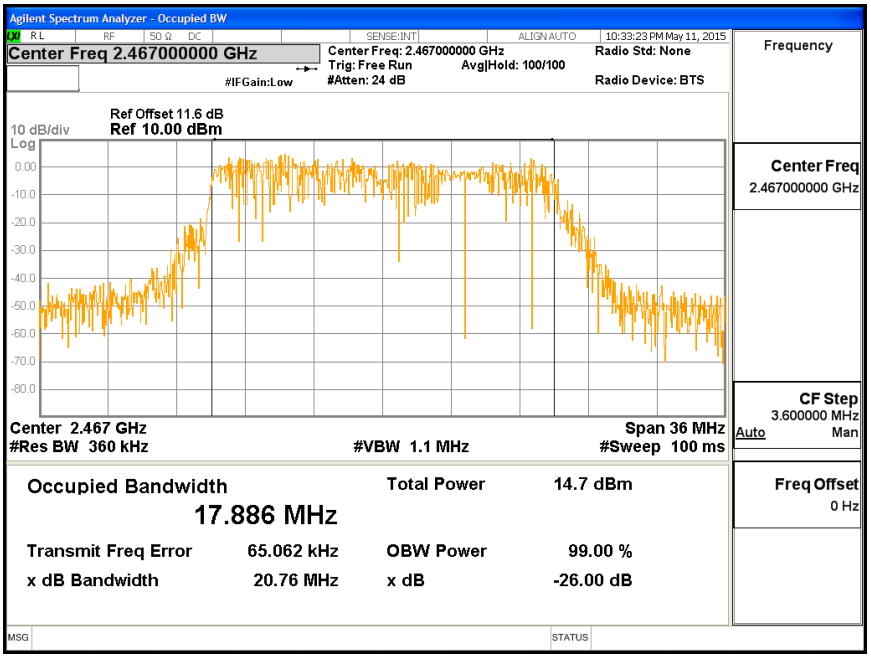

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH 13

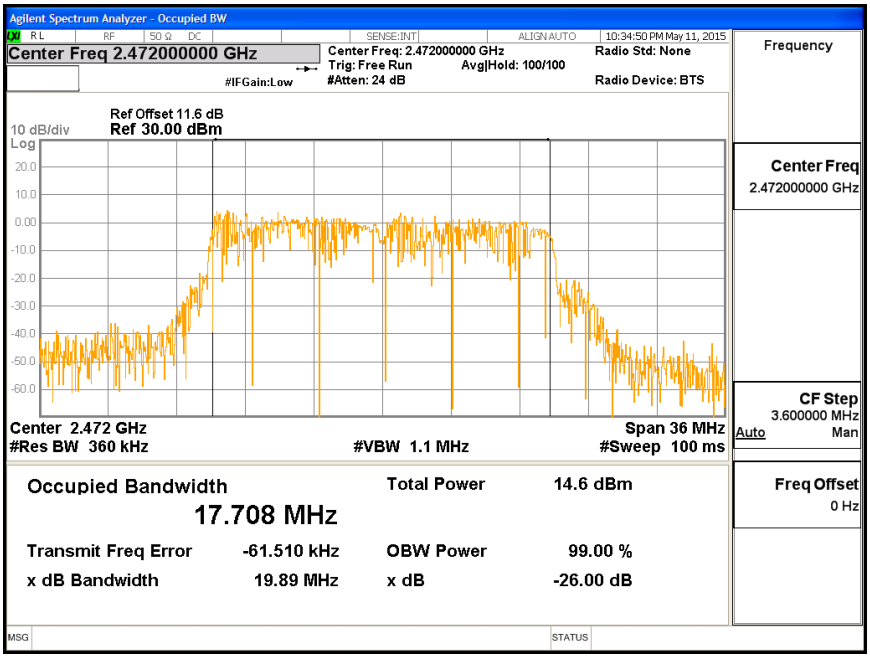

99% BANDWIDTH, Chain 1

BANDWIDTH LOW CH1

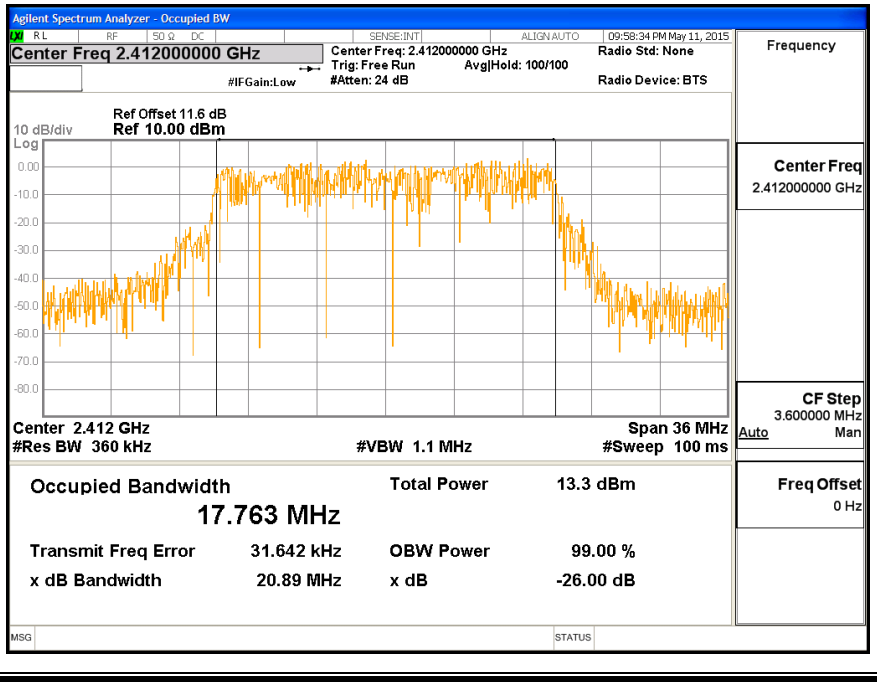

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH LOW CH2

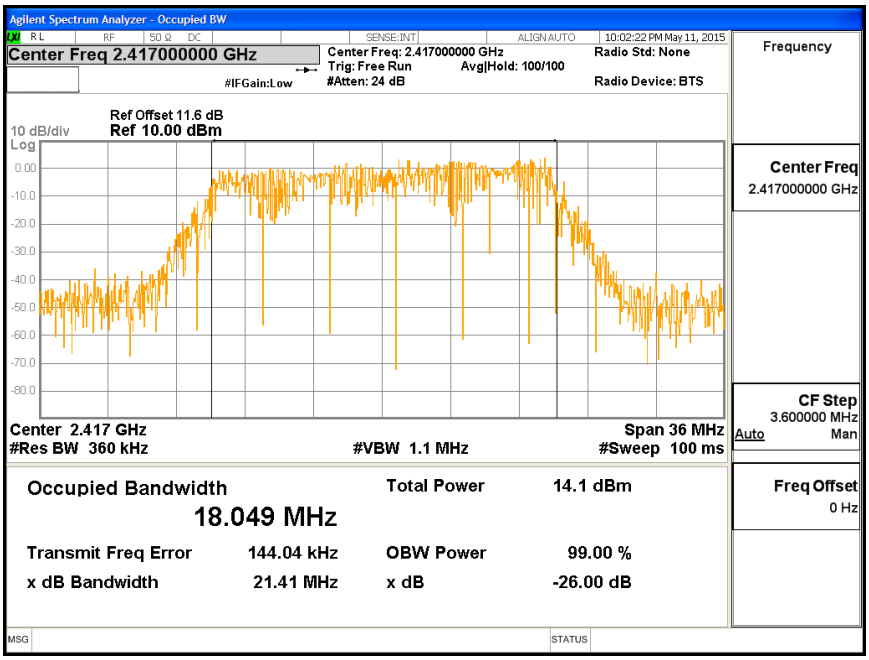

BANDWIDTH LOW CH3

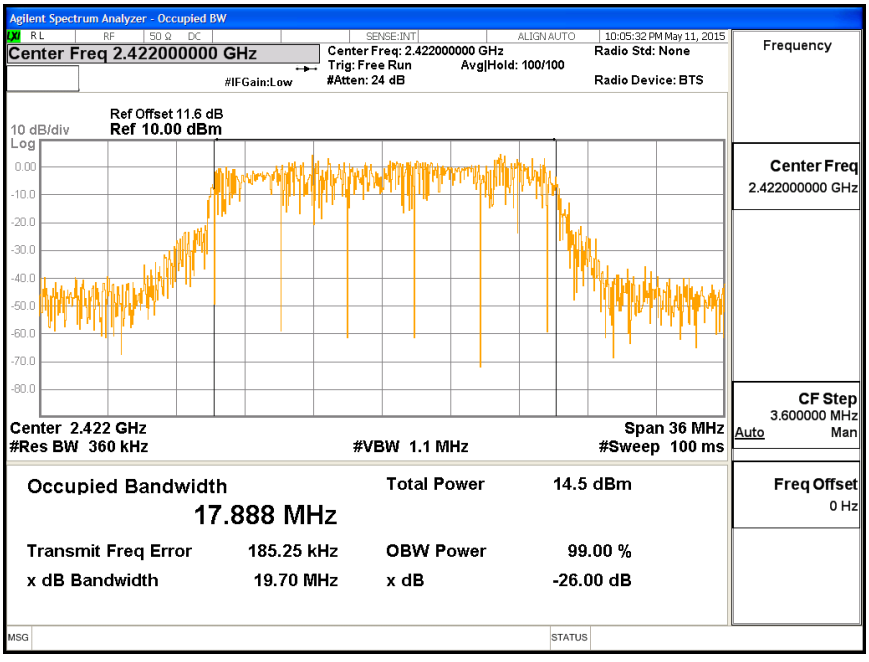

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH MID CH

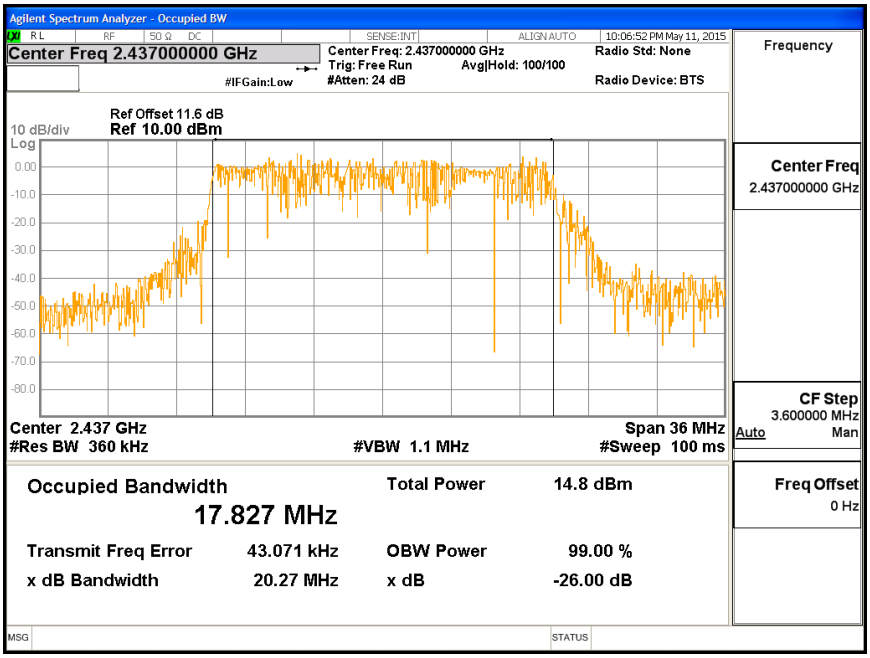

BANDWIDTH HIGH CH 9

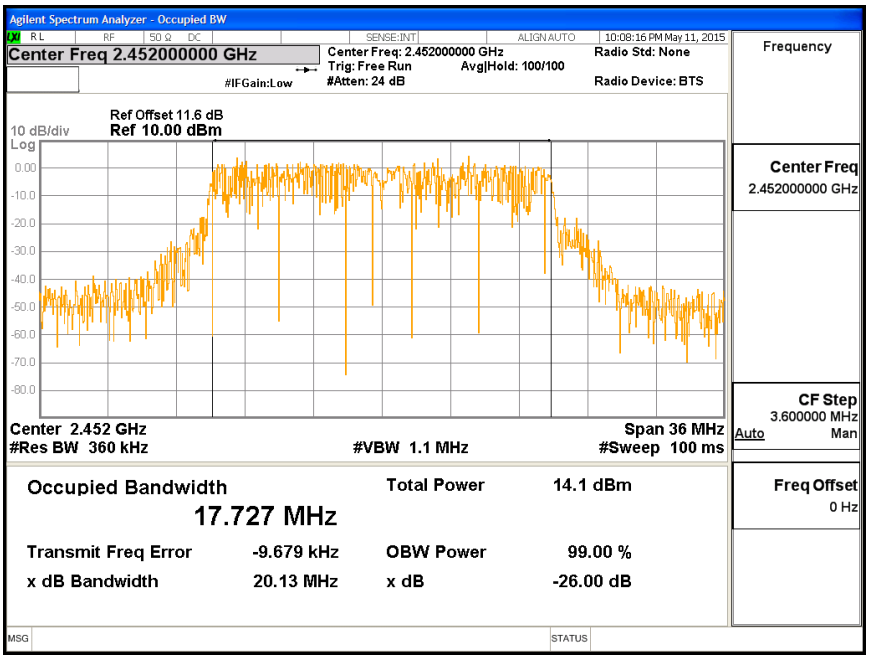

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH 10

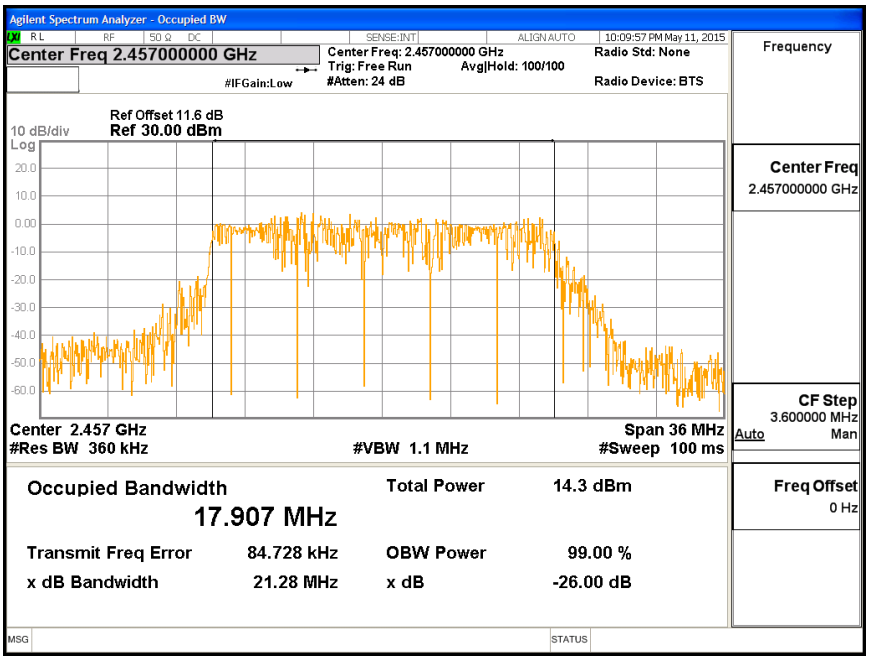

BANDWIDTH HIGH CH 11

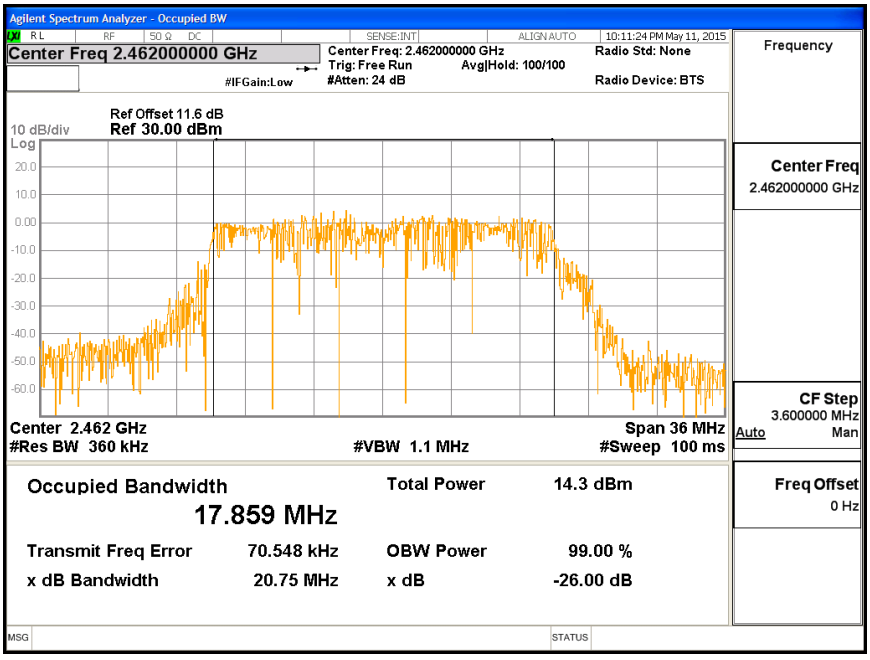

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH 12

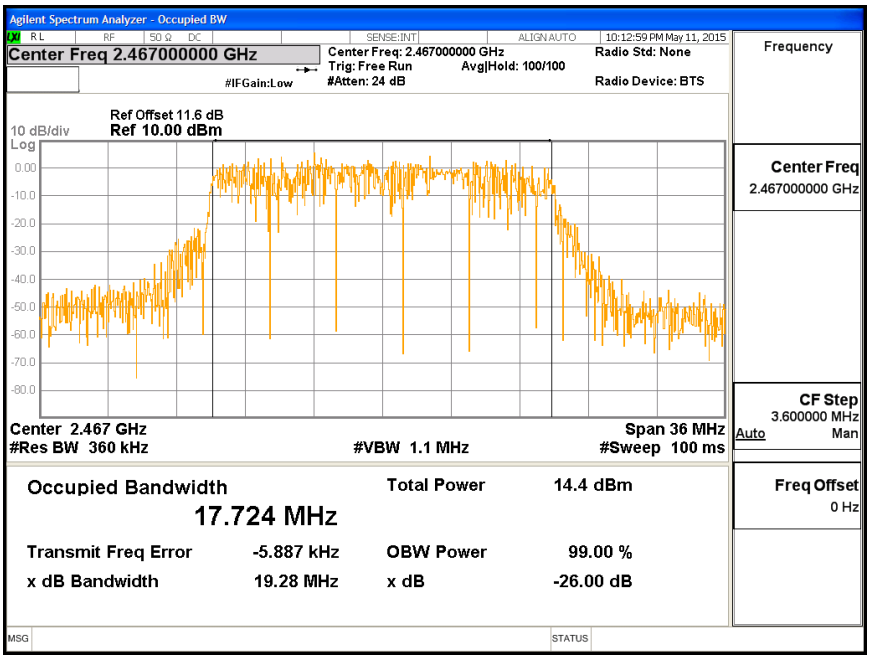

BANDWIDTH HIGH CH 13

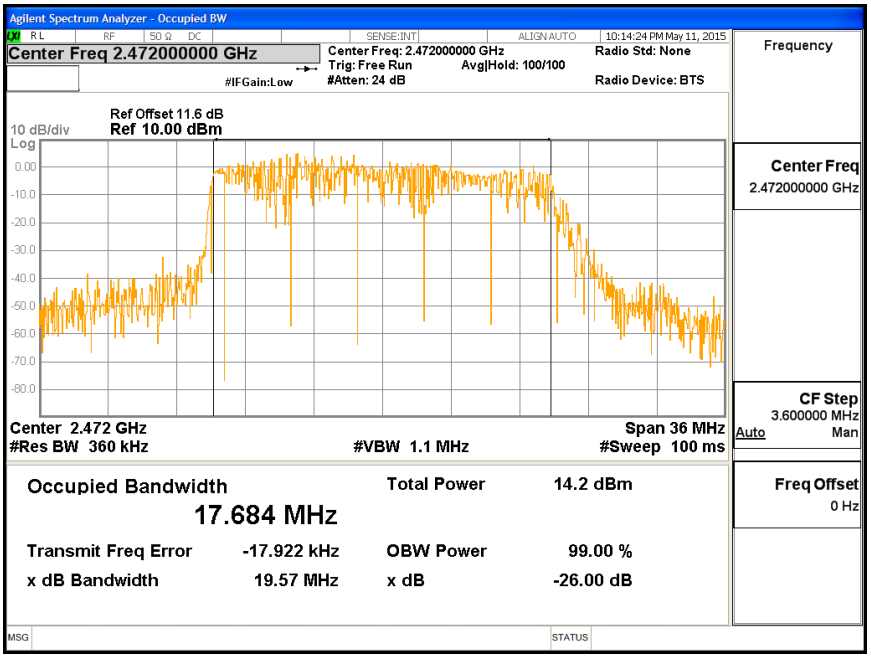

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS for Chain 0

Channel	Frequency (MHz)	Power (dBm)
Low_1	2412	13.93
Low_2	2417	15.98
Low_3	2422	18.42
Mid	2437	18.43
High_9	2452	18.40
High_10	2457	15.85
High_11	2462	13.88
High_12	2467	11.39
High_13	2472	1.91

RESULTS for Chain 1

Channel	Frequency (MHz)	Power (dBm)
Low_1	2412	13.96
Low_2	2417	16.00
Low_3	2422	17.92
Mid	2437	17.95
High_9	2452	17.95
High_10	2457	15.95
High_11	2462	14.00
High_12	2467	11.48
High_13	2472	1.89

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3.4. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS FOR Chain 0

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	0.14	30.00	30	36	30.00
Low_2	2417	0.14	30.00	30	36	30.00
Low_3	2422	0.14	30.00	30	36	30.00
Mid	2437	0.14	30.00	30	36	30.00
High_9	2452	0.14	30.00	30	36	30.00
High_10	2457	0.14	30.00	30	36	30.00
High_11	2462	0.14	30.00	30	36	30.00
High_12	2467	0.14	30.00	30	36	30.00
High_13	2472	0.14	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low_1	2412	20.96	20.96	30.00	-9.04
Low_2	2417	23.14	23.14	30.00	-6.86
Low_3	2422	25.64	25.64	30.00	-4.36
Mid	2437	25.68	25.68	30.00	-4.32
High_9	2452	25.67	25.67	30.00	-4.33
High_10	2457	23.08	23.08	30.00	-6.92
High_11	2462	21.16	21.16	30.00	-8.84
High_12	2467	18.60	18.60	30.00	-11.40
High_13	2472	9.28	9.28	30.00	-20.72

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS FOR Chain 1

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	1.40	30.00	30	36	30.00
Low_2	2417	1.40	30.00	30	36	30.00
Low_3	2422	1.40	30.00	30	36	30.00
Mid	2437	1.40	30.00	30	36	30.00
High_9	2452	1.40	30.00	30	36	30.00
High_10	2457	1.40	30.00	30	36	30.00
High_11	2462	1.40	30.00	30	36	30.00
High_12	2467	1.40	30.00	30	36	30.00
High_13	2472	1.40	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power

Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low_1	2412	20.82	20.82	30.00	-9.18
Low_2	2417	23.15	23.15	30.00	-6.85
Low_3	2422	25.12	25.12	30.00	-4.88
Mid	2437	25.29	25.29	30.00	-4.71
High_9	2452	25.26	25.26	30.00	-4.74
High_10	2457	23.22	23.22	30.00	-6.78
High_11	2462	21.34	21.34	30.00	-8.66
High_12	2467	18.75	18.75	30.00	-11.25
High_13	2472	9.13	9.13	30.00	-20.87

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted form the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

RESULTS for Chain 0

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low_1	2412	-11.32	-11.32	8.0	-19.3
Low_2	2417	-9.07	-9.07	8.0	-17.1
Low_3	2422	-7.22	-7.22	8.0	-15.2
Mid	2437	-7.03	-7.03	8.0	-15.0
High_9	2452	-7.54	-7.54	8.0	-15.5
High_10	2457	-9.30	-9.30	8.0	-17.3
High_11	2462	-11.18	-11.18	8.0	-19.2
High_12	2467	-13.09	-13.09	8.0	-21.1
High_13	2472	-21.81	-21.81	8.0	-29.8

RESULTS for Chain 1

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low_1	2412	-11.86	-11.86	8.0	-19.9
Low_2	2417	-9.58	-9.58	8.0	-17.6
Low_3	2422	-7.13	-7.13	8.0	-15.1
Mid	2437	-7.34	-7.34	8.0	-15.3
High_9	2452	-6.72	-6.72	8.0	-14.7
High_10	2457	-9.41	-9.41	8.0	-17.4
High_11	2462	-10.90	-10.90	8.0	-18.9
High_12	2467	-13.60	-13.60	8.0	-21.6
High_13	2472	-21.47	-21.47	8.0	-29.5

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0

PSD, Chain 0 LOW CH1

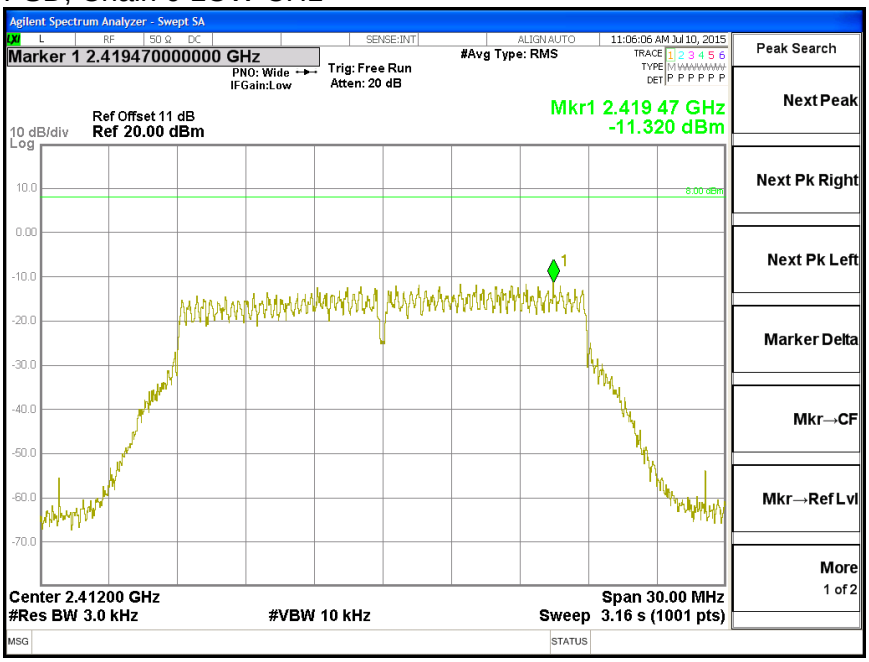

PSD, Chain 0 LOW CH2

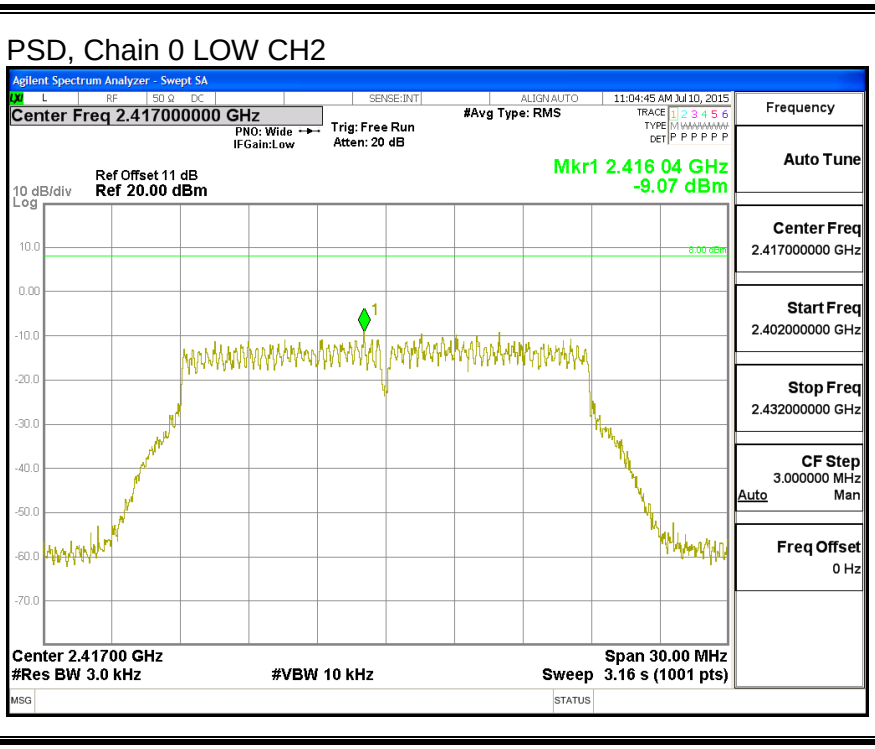

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0 LOW CH3

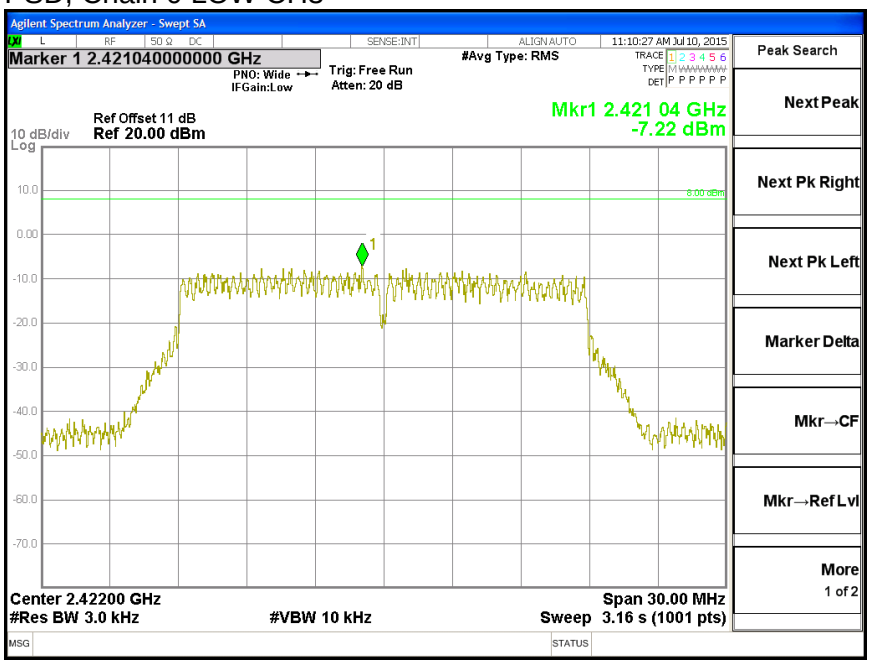

PSD, Chain 0 MID CH

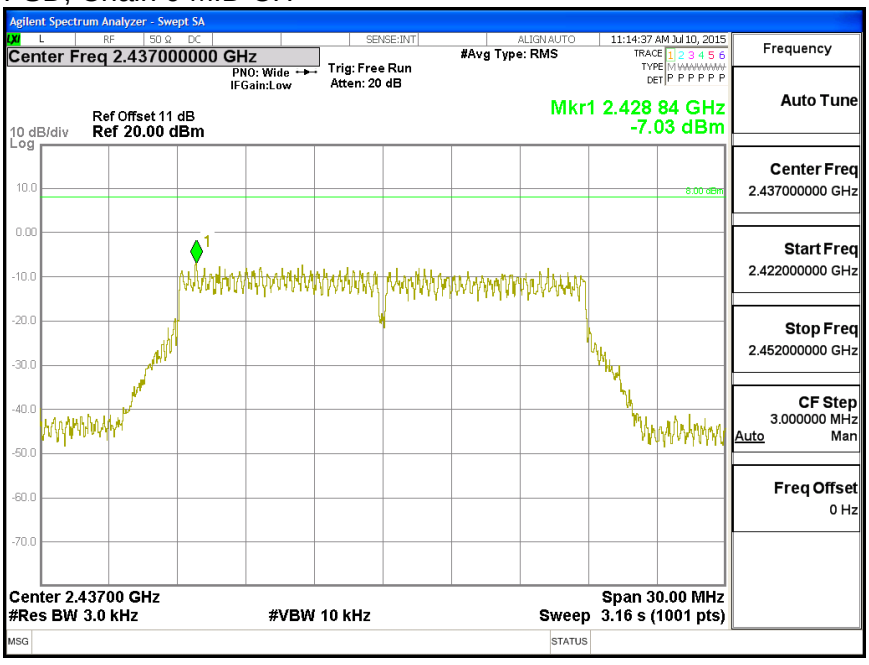

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0 HIGH CH9

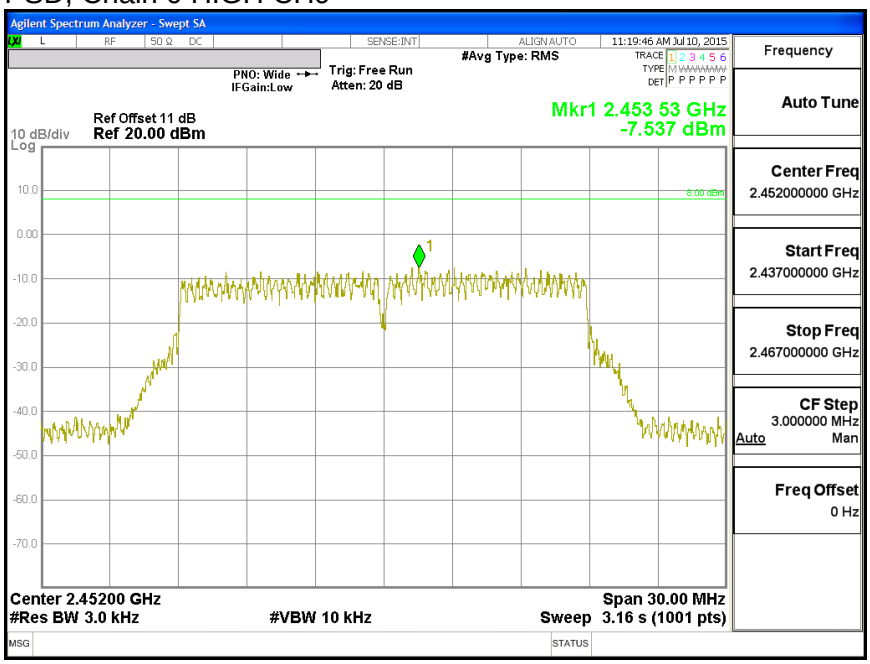

PSD, Chain 0 HIGH CH10

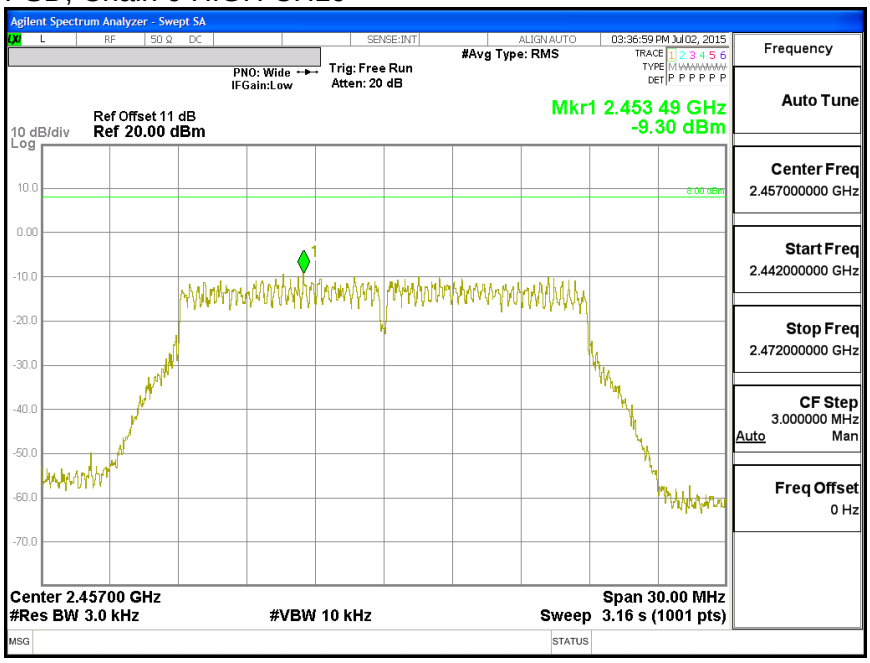

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0 HIGH CH11

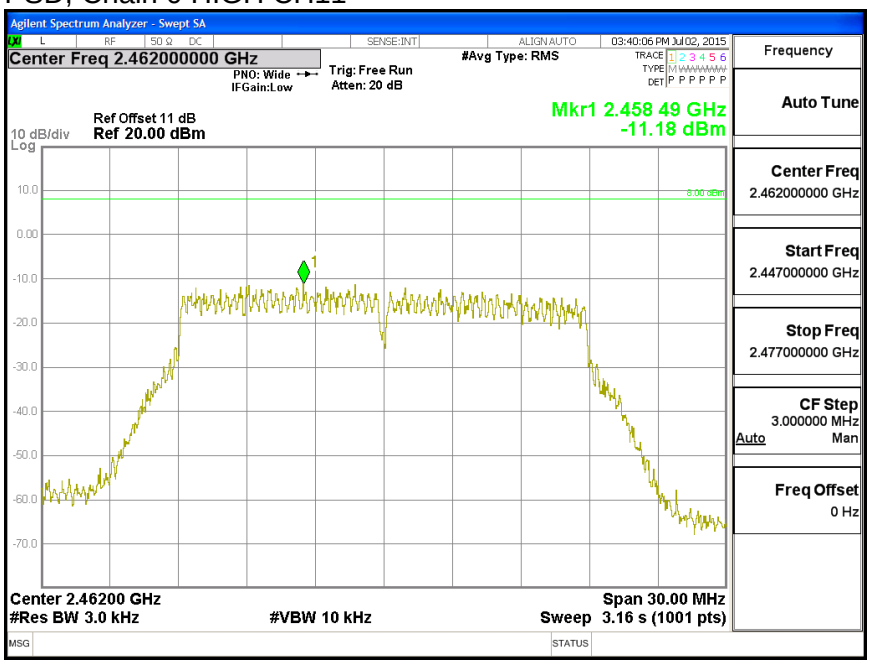

PSD, Chain 0 HIGH CH12

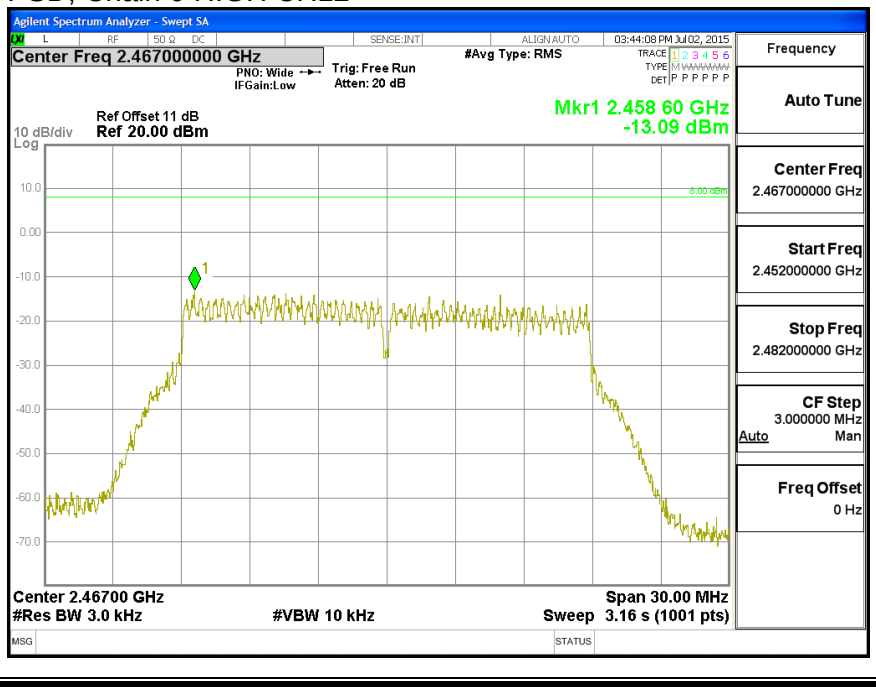

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0 HIGH CH13

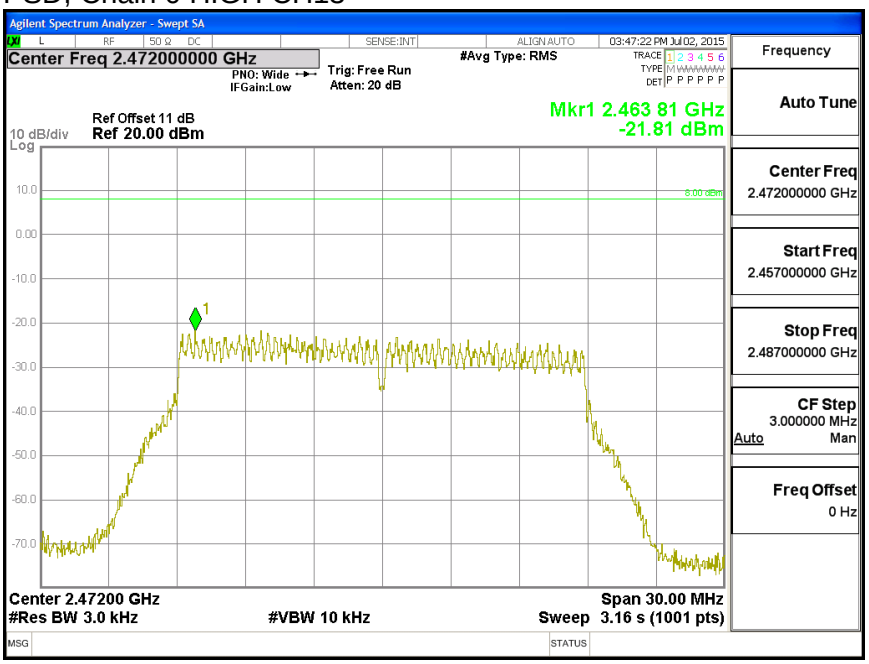

PSD, Chain 1

PSD, Chain 0 LOW CH1

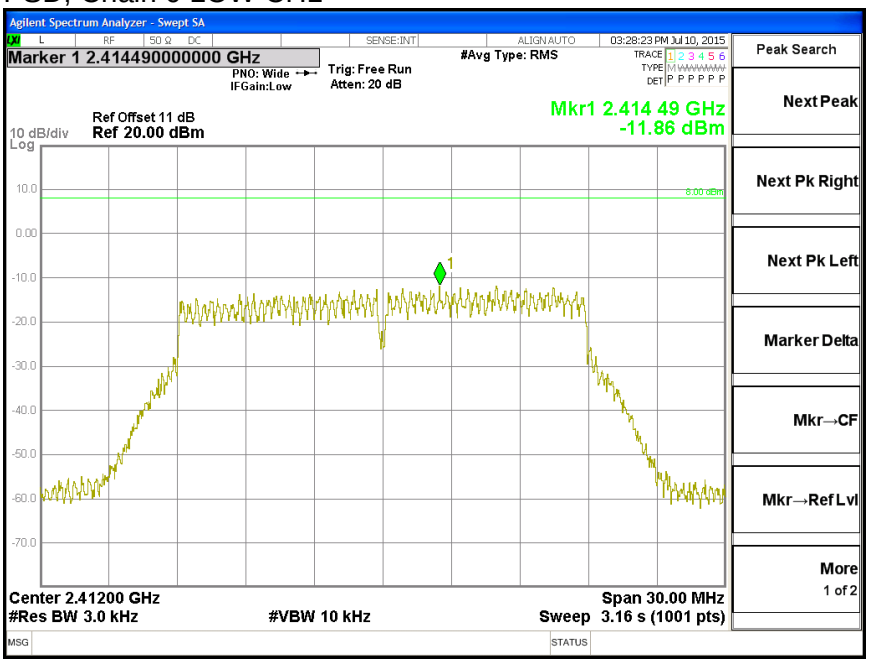

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0 LOW CH2

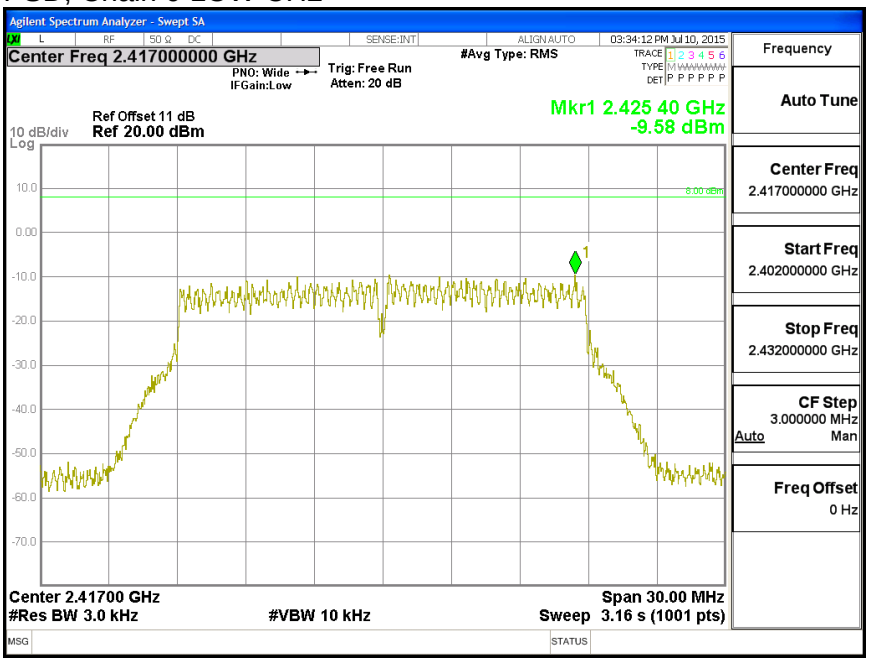

PSD, Chain 0 LOW CH3

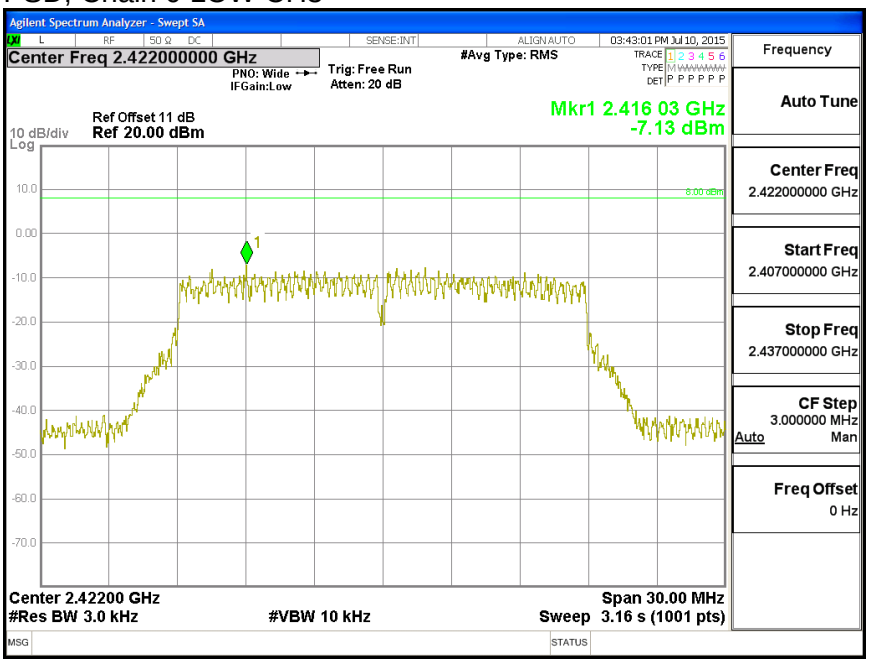

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0 MID CH

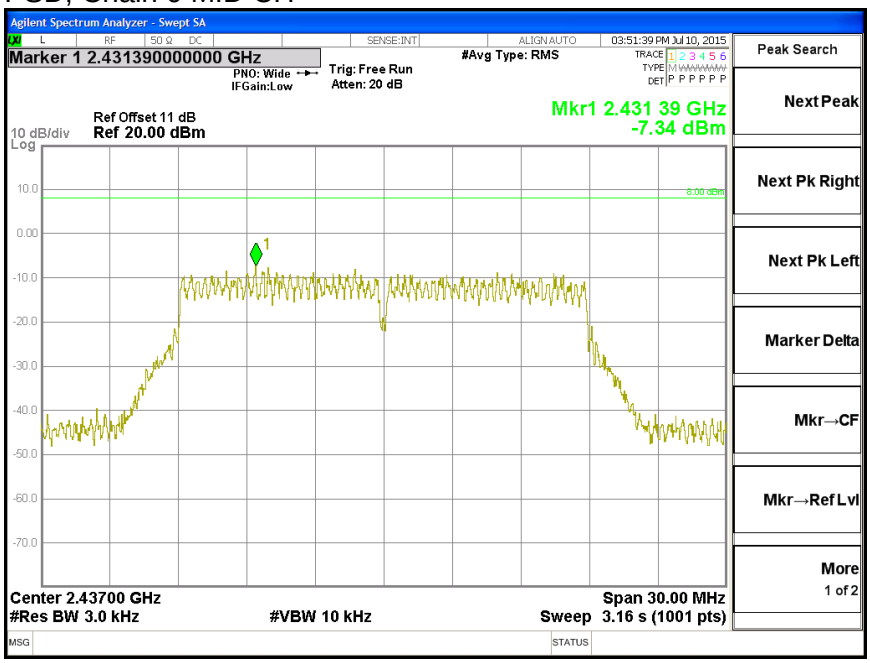

PSD, Chain 0 HIGH CH9

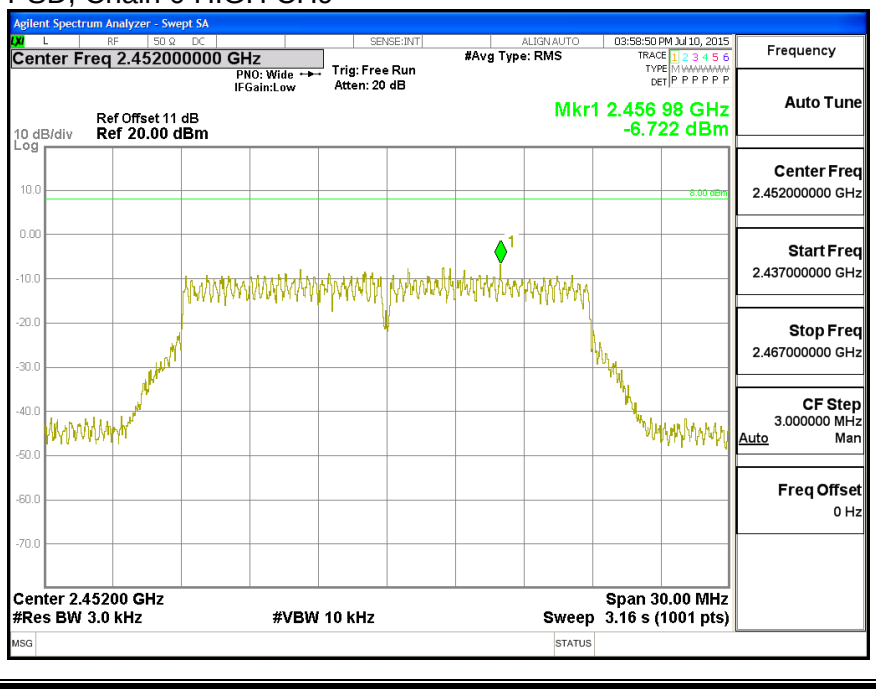

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0 HIGH CH10

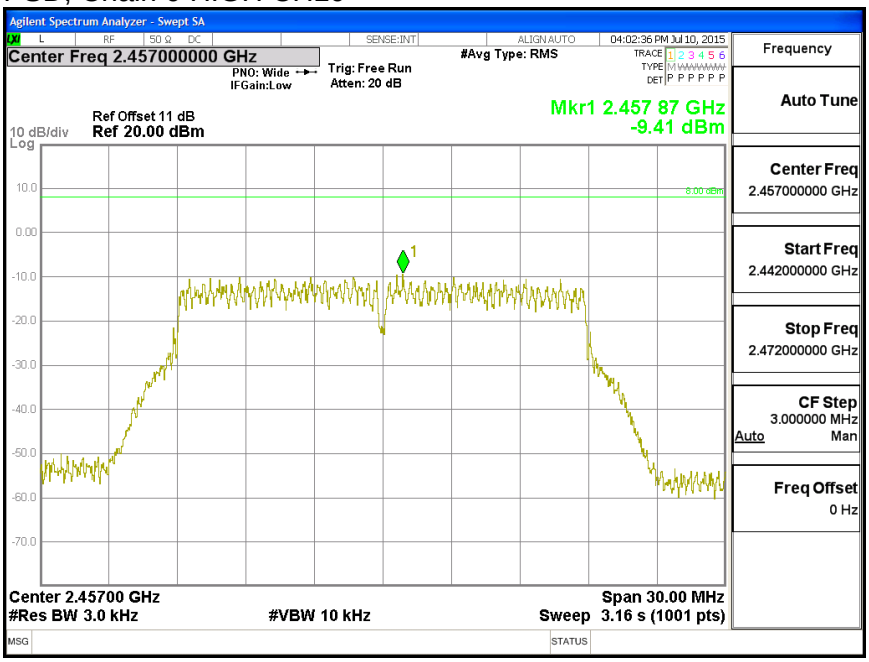

PSD, Chain 0 HIGH CH11

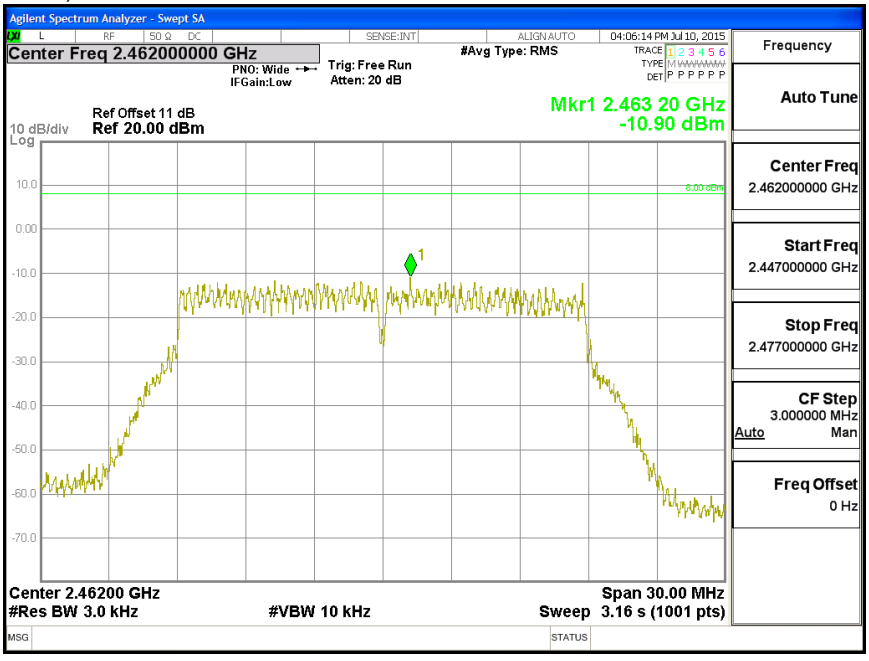

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, Chain 0 HIGH CH12

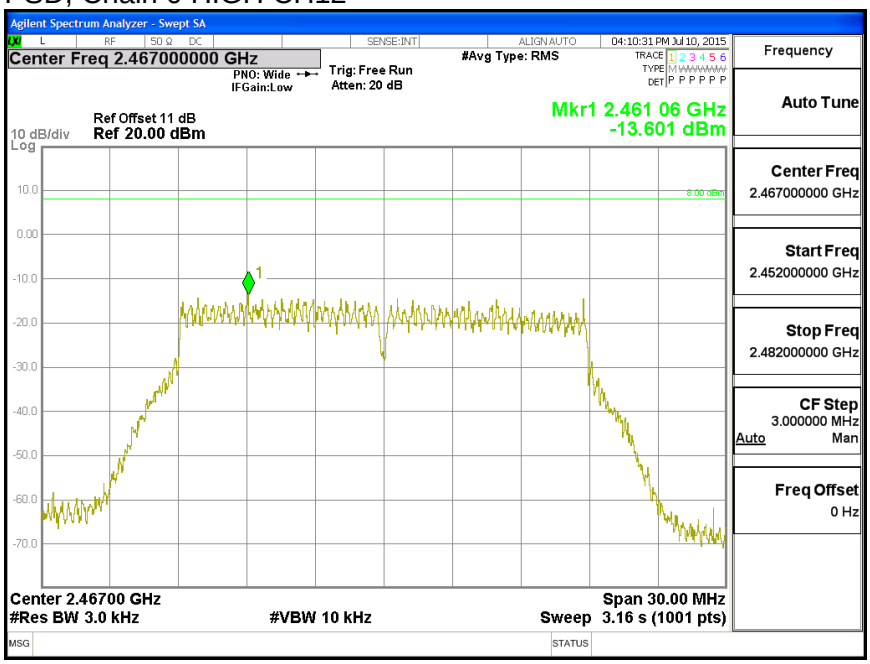

PSD, Chain 0 HIGH CH13

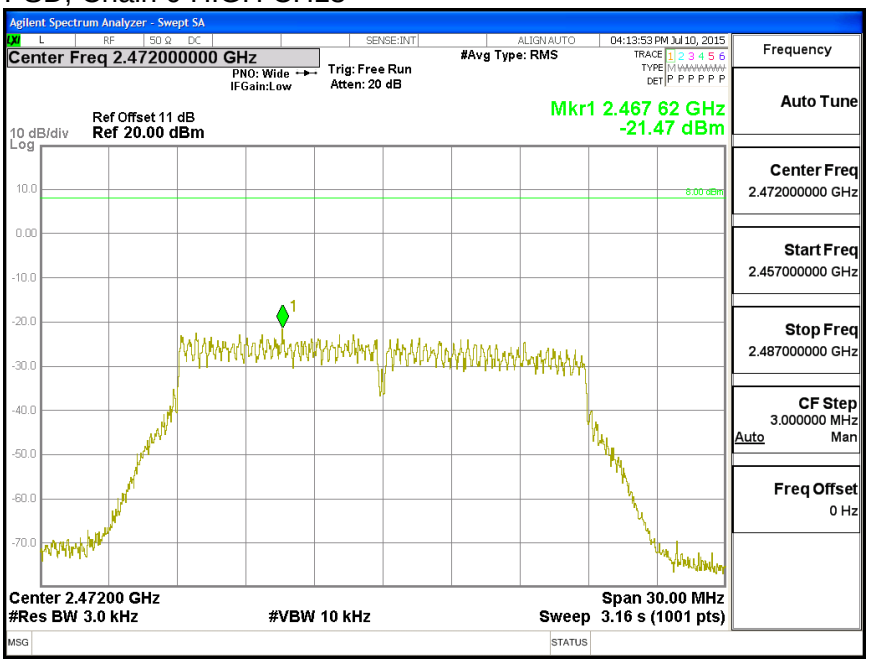

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3.6. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS for Chain 0

LOW CHANNEL BANDEDGE

AUTHORIZED BAND EDGE LOW CH1

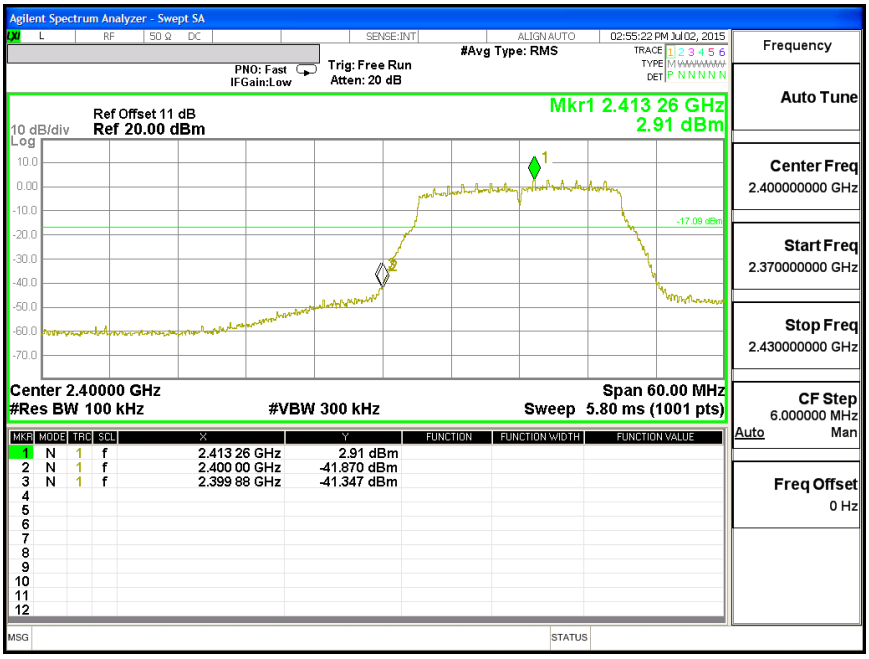

AUTHORIZED BAND EDGE LOW CH2

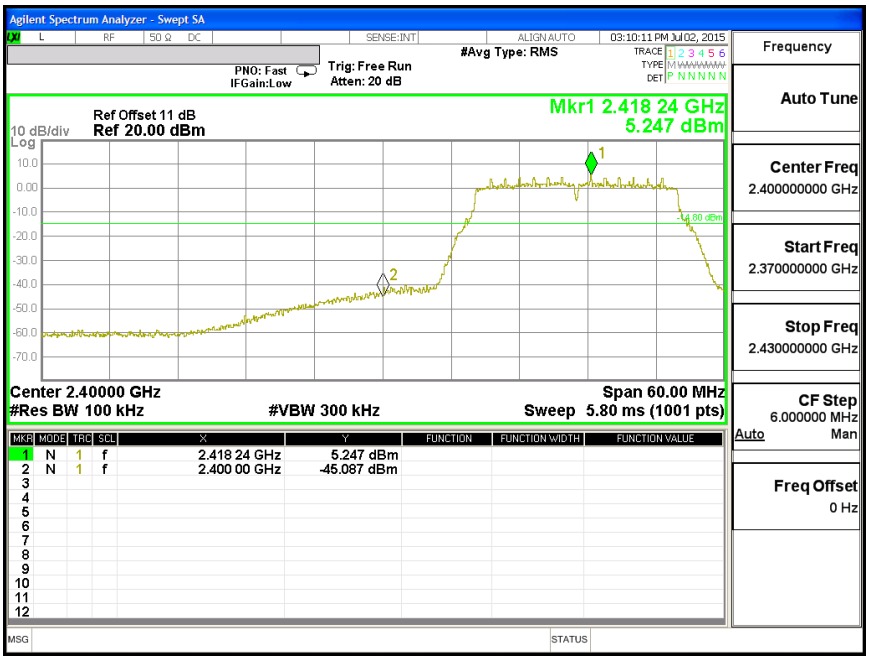

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BAND EDGE LOW CH3

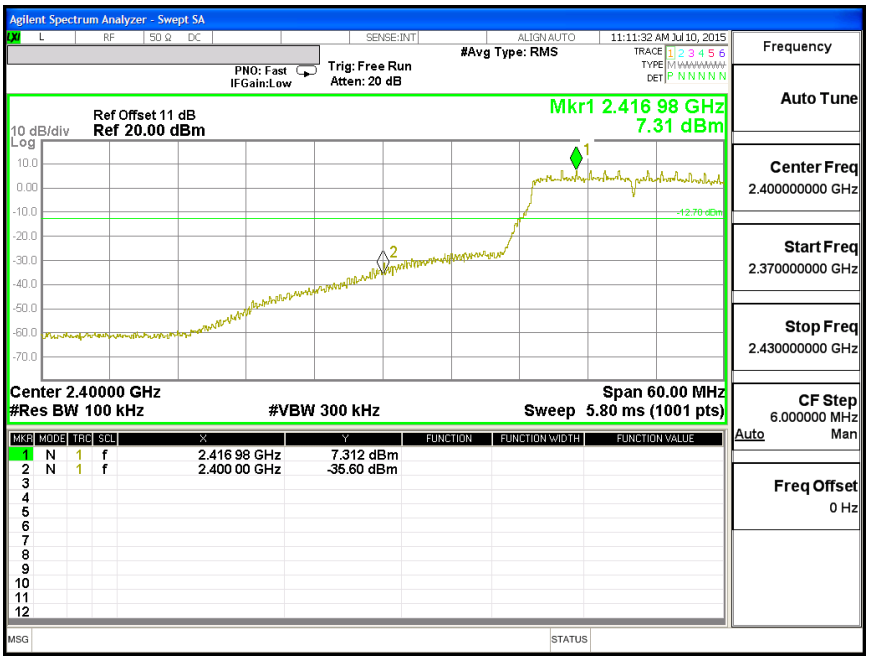

MID CHANNEL BANDEDGE

REFERENCE LEVEL MID CH

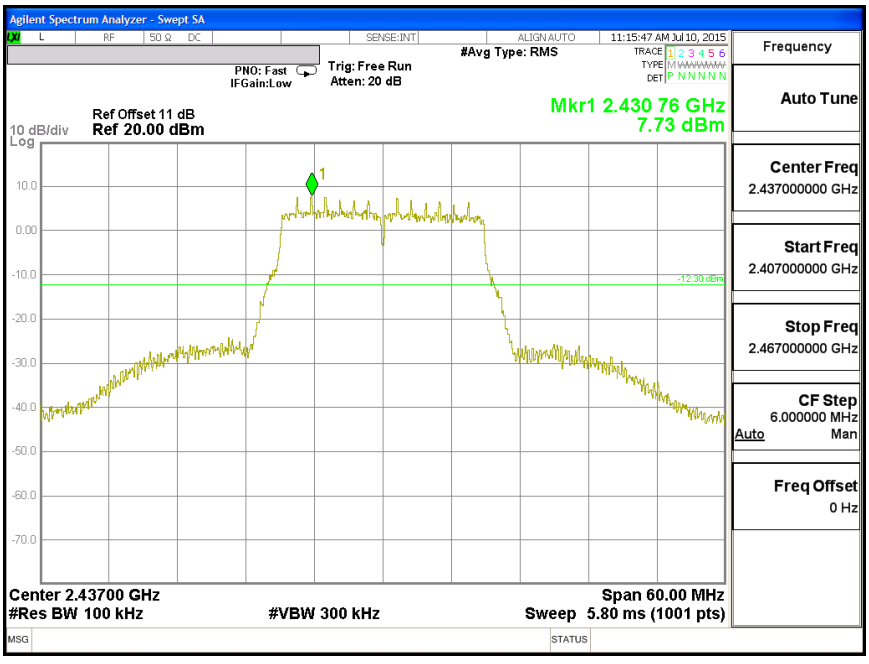

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL BANDEDGE

AUTHORIZED BAND EDGE HIGH CH9

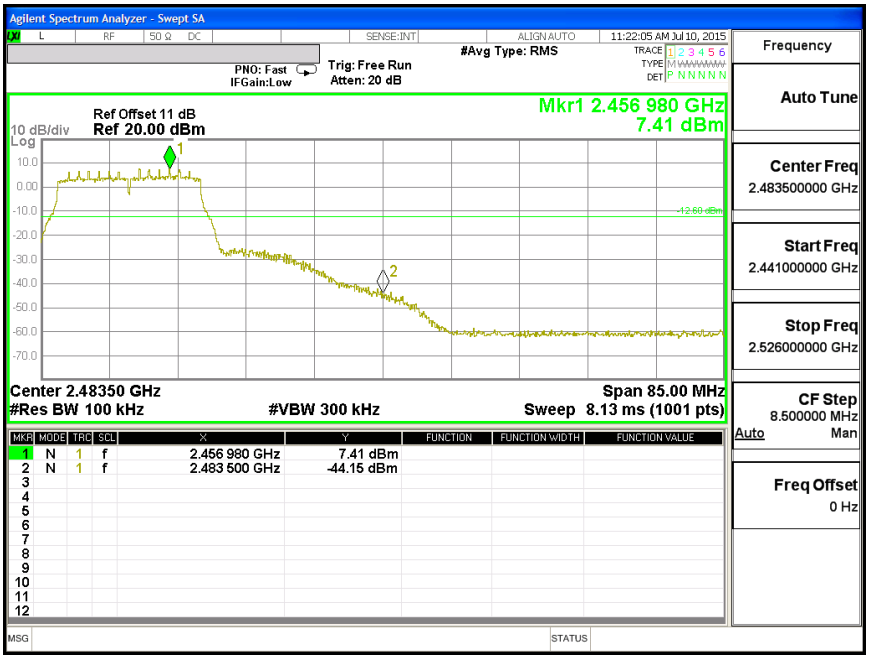

AUTHORIZED BAND EDGE HIGH CH10

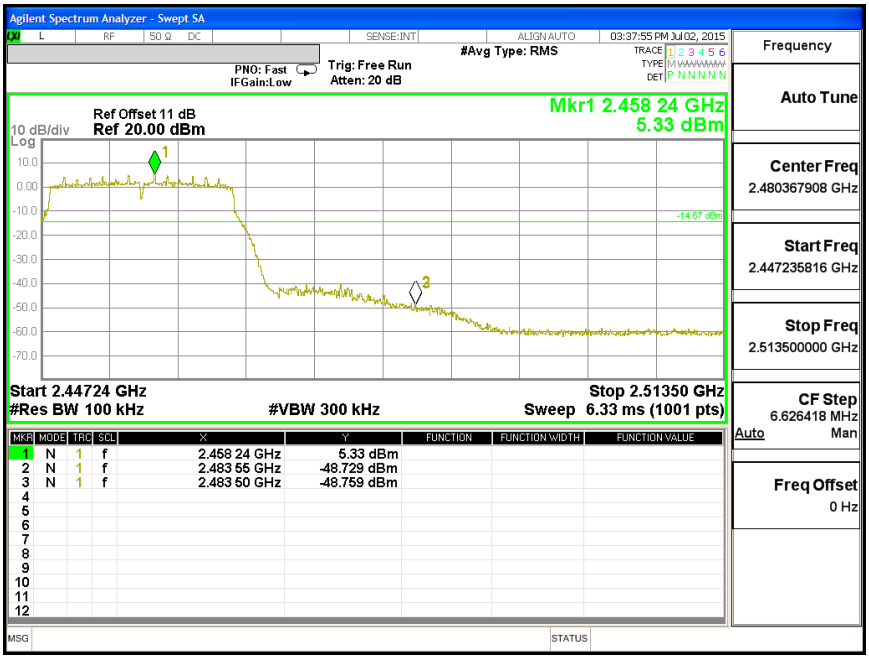

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BAND EDGE HIGH CH11

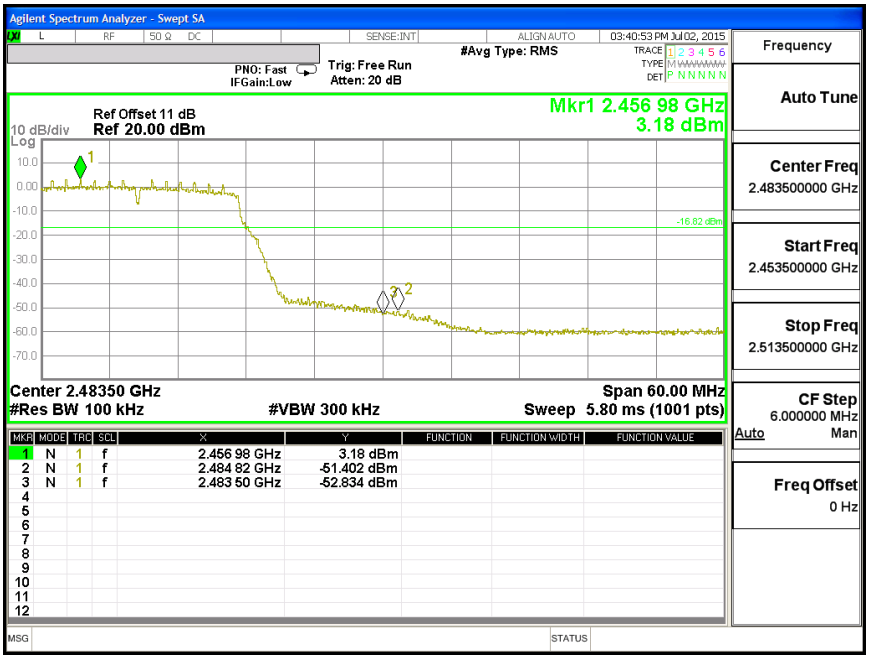

AUTHORIZED BAND EDGE HIGH CH12

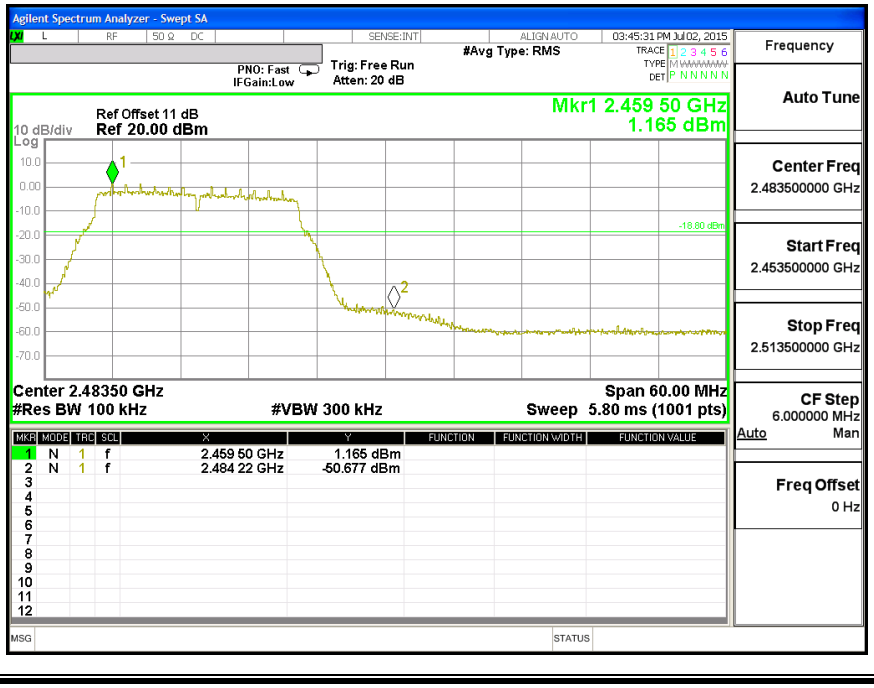

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BAND EDGE HIGH CH13

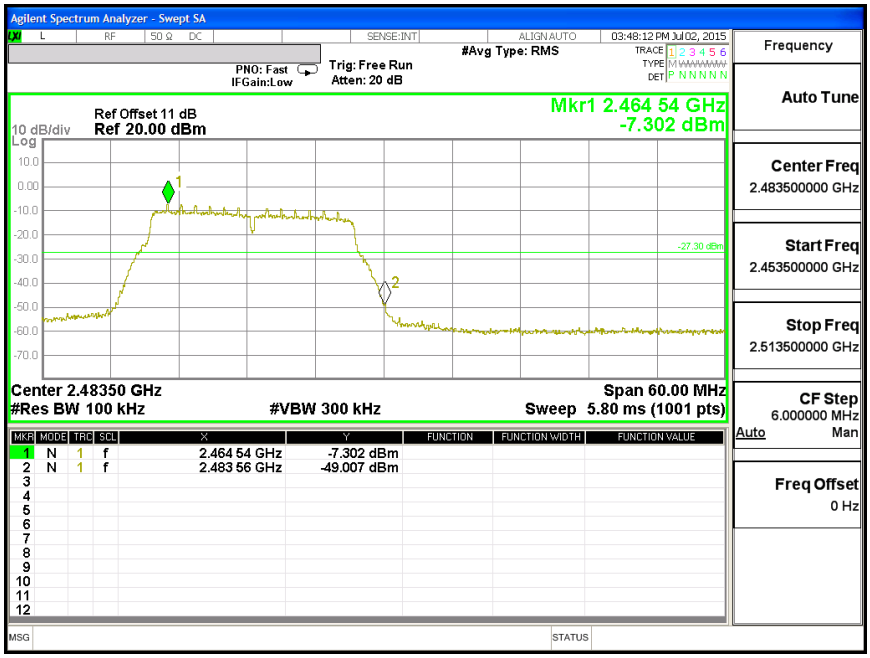

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUT-OF-BAND EMISSIONS

OUT OF BAND LOW CH1

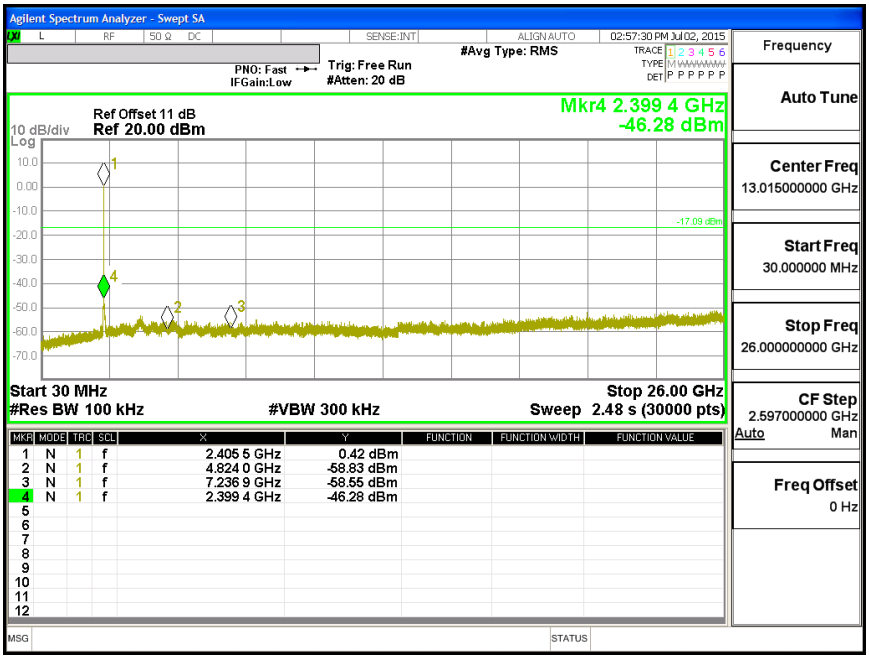

OUT OF BAND LOW CH2

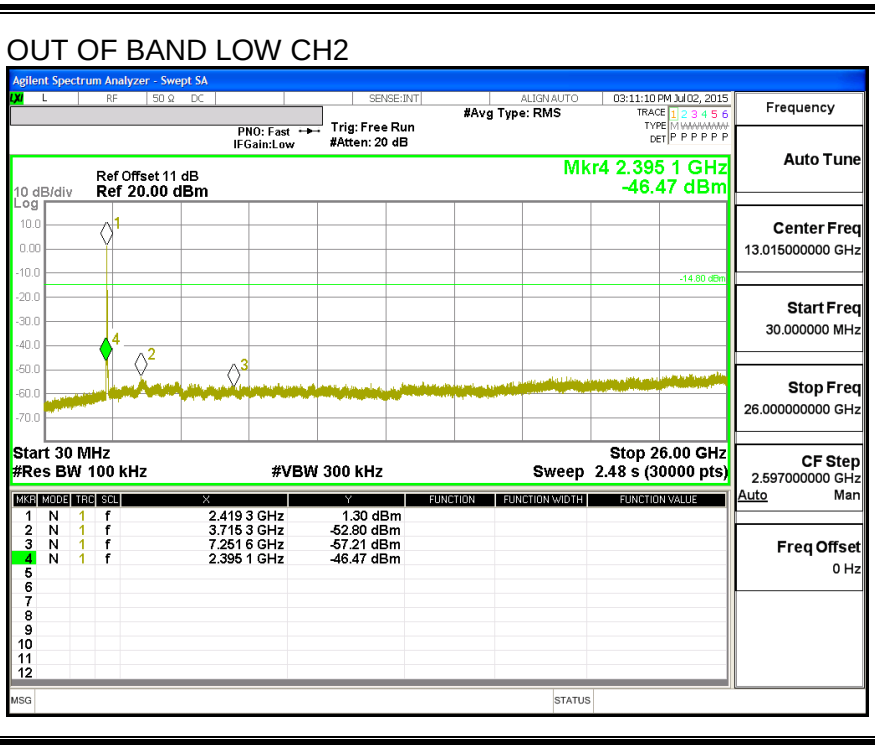

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUT OF BAND LOW CH3

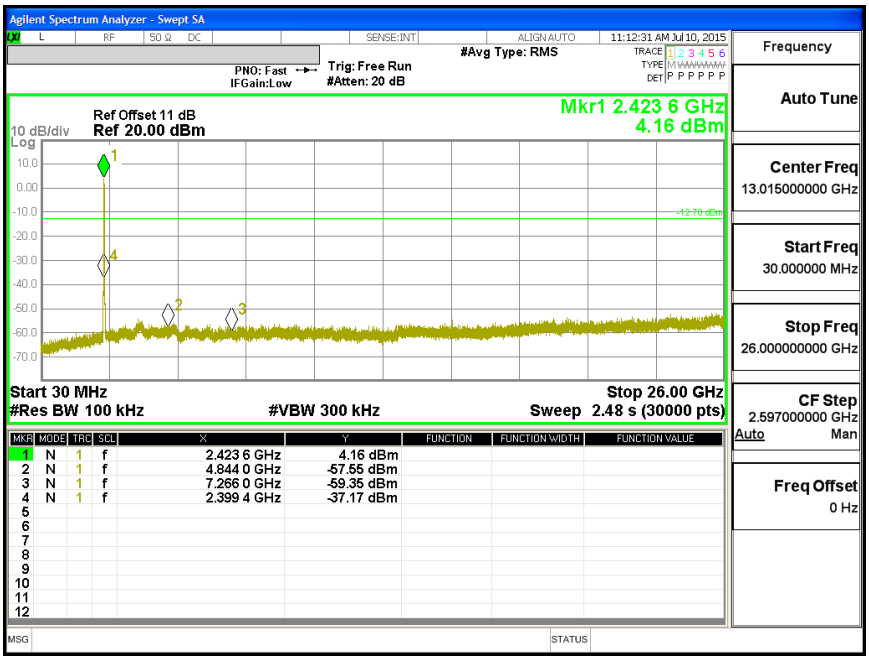

OUT OF BAND MID CH

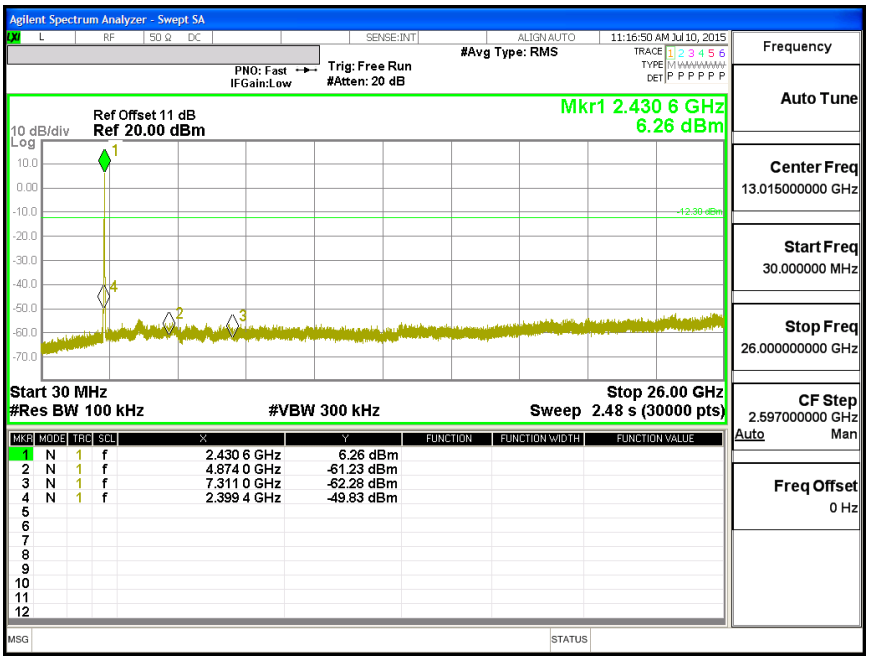

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUT OF BAND HIGH CH9

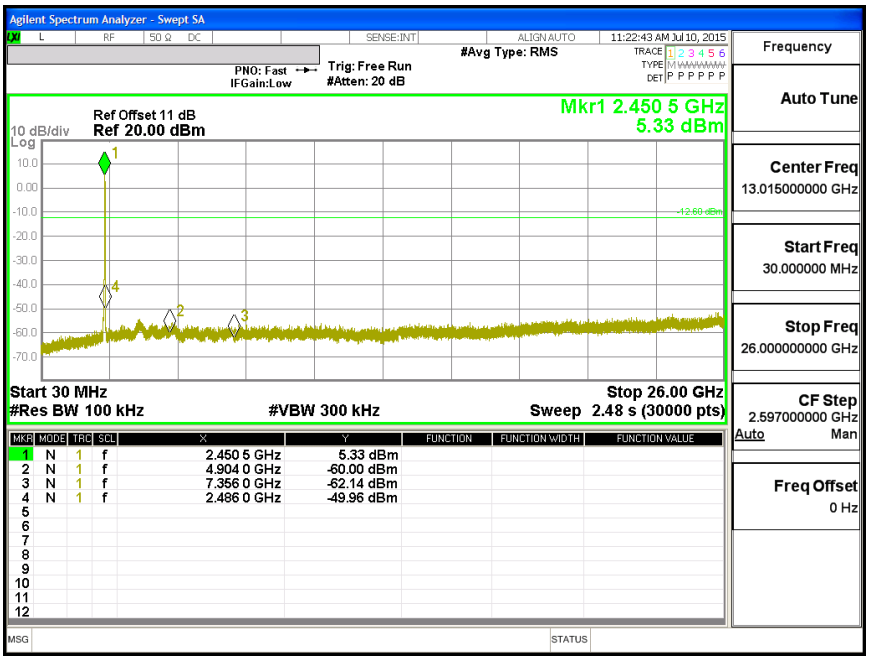

OUT OF BAND HIGH CH10

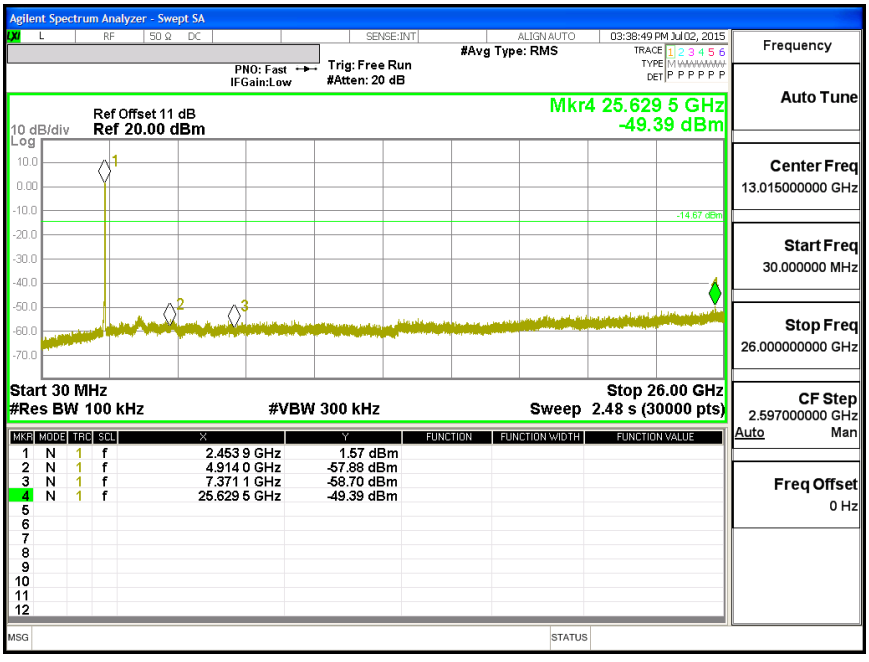

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUT OF BAND HIGH CH11

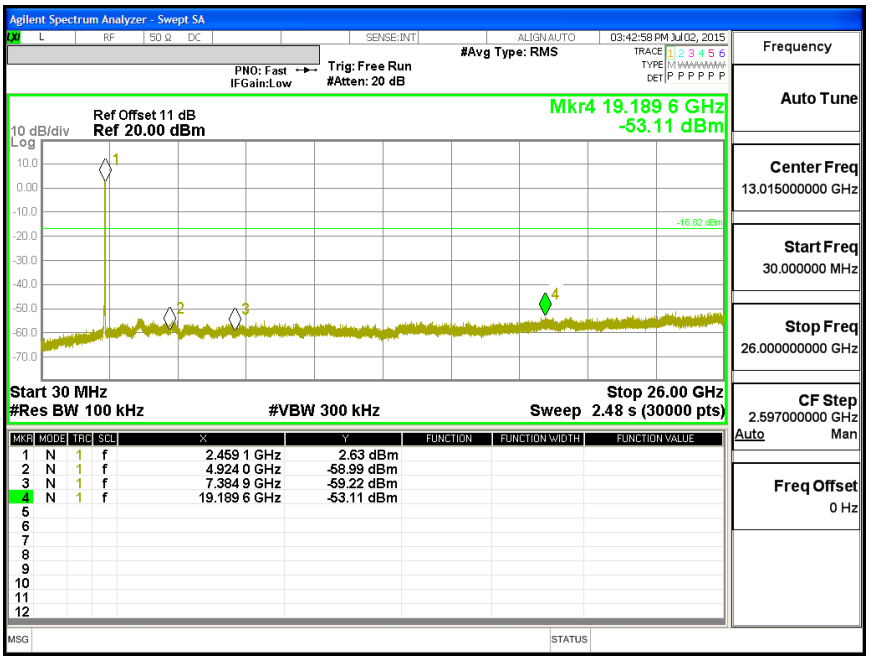

OUT OF BAND HIGH CH12

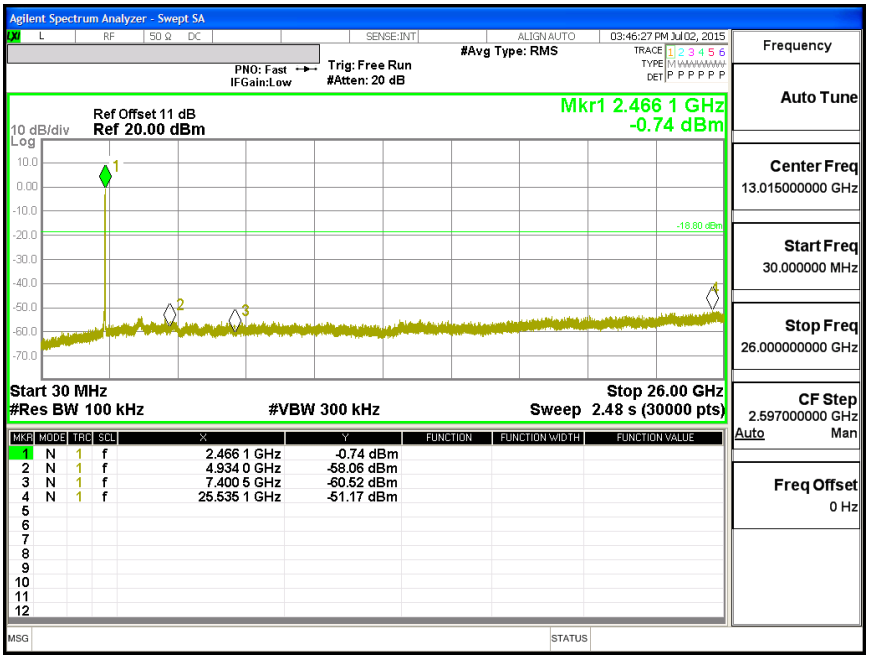

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUT OF BAND HIGH CH13

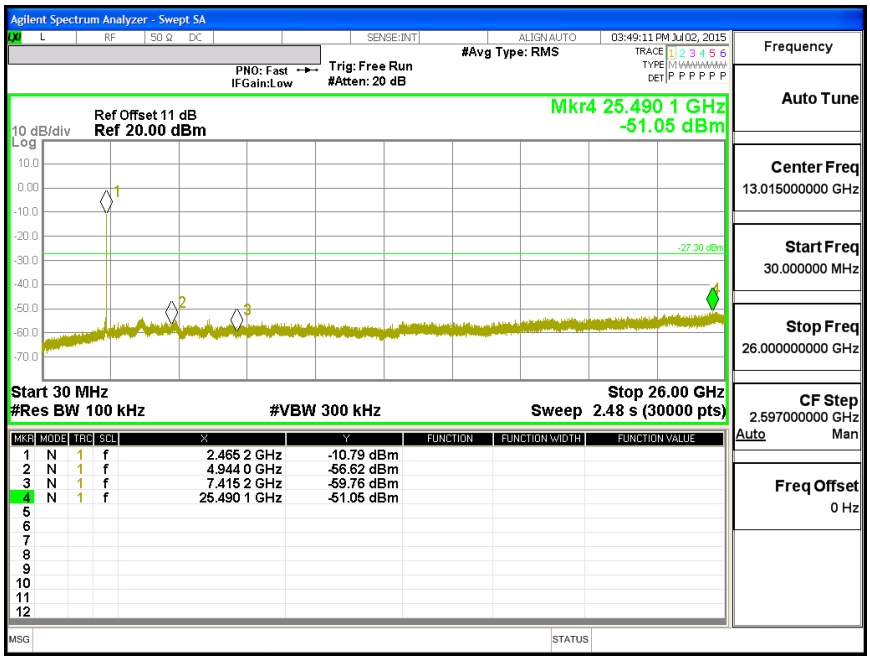

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.