

### HAC-RF Emission

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/26/2015;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1380; Calibrated: 7/13/2015
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

### Dipole E-Field measurement/835 MHz/Hearing Aid Compatibility Test at 15mm distance

**(41x361x1)**: Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 118.9 V/m; Power Drift = 0.05 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 108.8 V/m

Near-field category: **M4 (AWF 0 dB)**

PMF scaled E-field

Grid 1 <b>M4</b> <b>106.2 V/m</b>	Grid 2 <b>M4</b> <b>108.0 V/m</b>	Grid 3 <b>M4</b> <b>106.6 V/m</b>
Grid 4 <b>M4</b> <b>60.03 V/m</b>	Grid 5 <b>M4</b> <b>61.38 V/m</b>	Grid 6 <b>M4</b> <b>60.89 V/m</b>
Grid 7 <b>M4</b> <b>107.0 V/m</b>	Grid 8 <b>M4</b> <b>108.8 V/m</b>	Grid 9 <b>M4</b> <b>107.0 V/m</b>

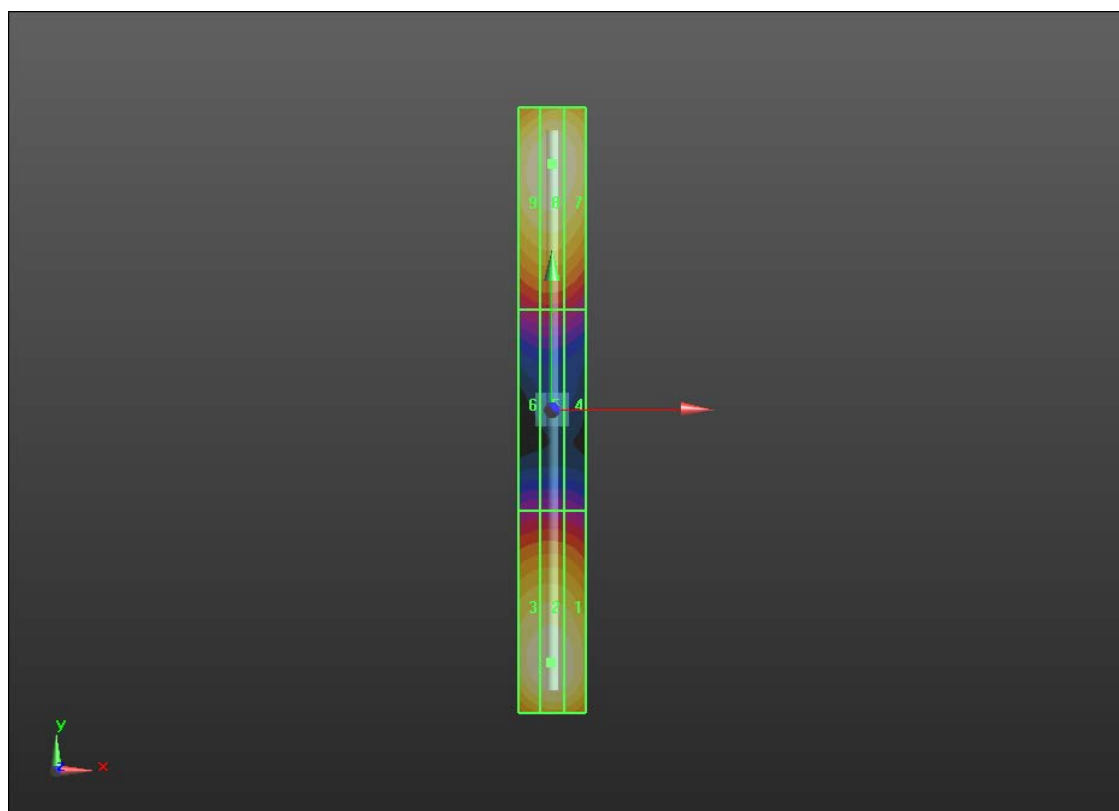

0 dB = 108.8 V/m = 40.73 dBV/m

## HAC-RF Emission

Communication System: UID 0, CW (0); Frequency: 1730 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/26/2015;

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1380; Calibrated: 7/13/2015

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB

- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

### Dipole E-Field measurement/1730 MHz/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 160.3 V/m; Power Drift = 0.00 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 99.86 V/m

Near-field category: **M3 (AWF 0 dB)**

PMF scaled E-field

Grid 1 <b>M3</b> <b>90.62 V/m</b>	Grid 2 <b>M3</b> <b>91.97 V/m</b>	Grid 3 <b>M3</b> <b>90.66 V/m</b>
Grid 4 <b>M3</b> <b>97.09 V/m</b>	Grid 5 <b>M3</b> <b>99.15 V/m</b>	Grid 6 <b>M3</b> <b>97.75 V/m</b>
Grid 7 <b>M3</b> <b>98.02 V/m</b>	Grid 8 <b>M3</b> <b>99.86 V/m</b>	Grid 9 <b>M3</b> <b>98.19 V/m</b>

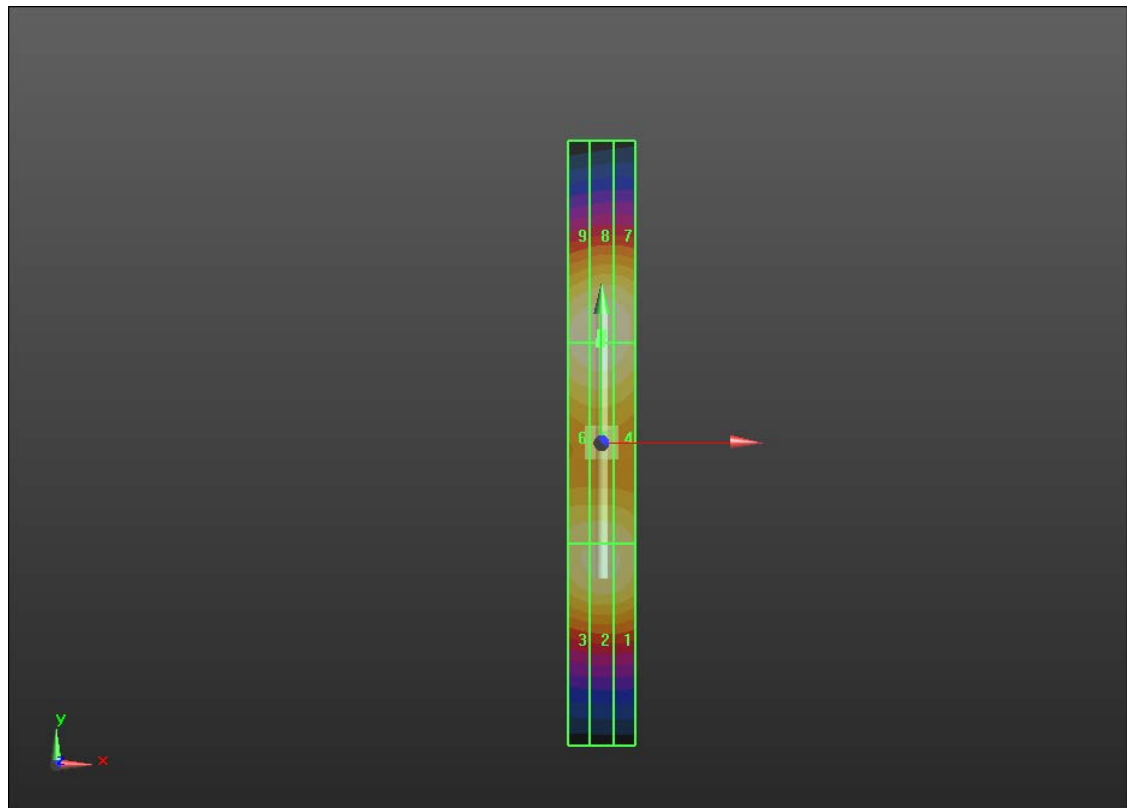

0 dB = 99.86 V/m = 39.99 dBV/m

### HAC-RF Emission

Communication System: UID 0, CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/26/2015;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1380; Calibrated: 7/13/2015
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

### Dipole E-Field measurement/1880 MHz/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 147.6 V/m; Power Drift = 0.03 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 92.86 V/m

Near-field category: **M3 (AWF 0 dB)**

PMF scaled E-field

Grid 1 <b>M3</b> <b>80.22 V/m</b>	Grid 2 <b>M3</b> <b>81.16 V/m</b>	Grid 3 <b>M3</b> <b>80.28 V/m</b>
Grid 4 <b>M3</b> <b>70.69 V/m</b>	Grid 5 <b>M3</b> <b>71.86 V/m</b>	Grid 6 <b>M3</b> <b>71.29 V/m</b>
Grid 7 <b>M3</b> <b>91.38 V/m</b>	Grid 8 <b>M3</b> <b>92.86 V/m</b>	Grid 9 <b>M3</b> <b>91.30 V/m</b>

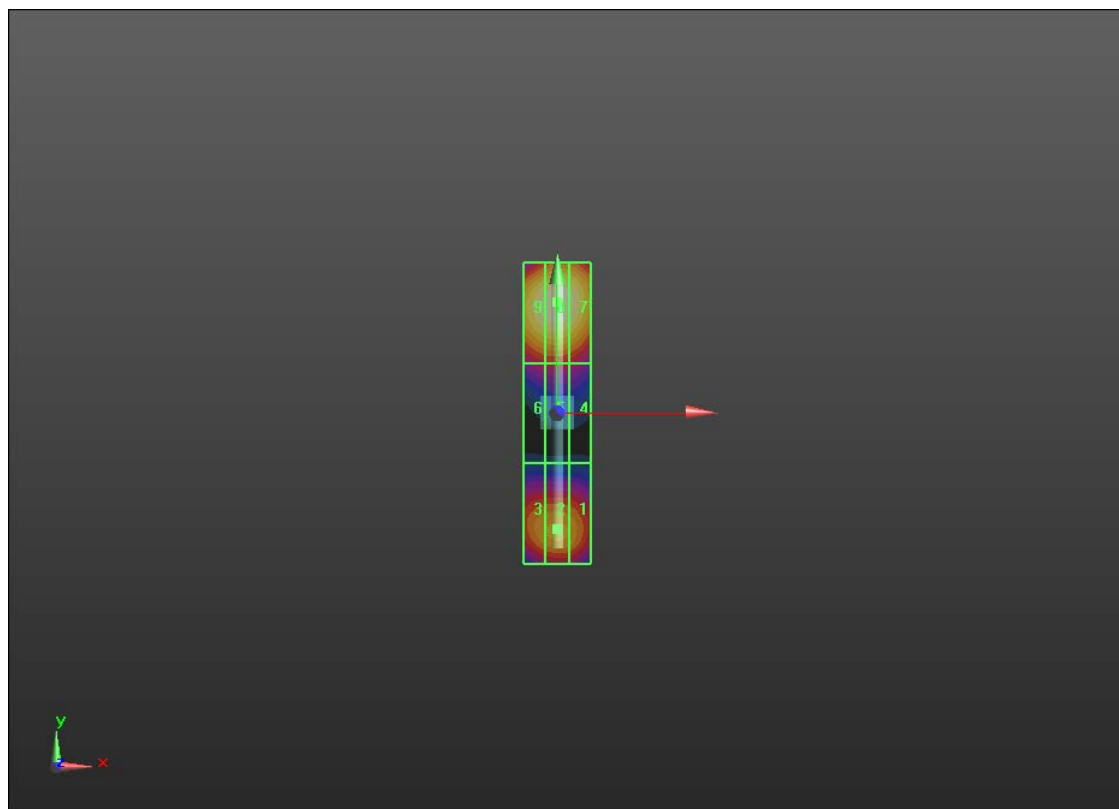

0 dB = 92.86 V/m = 39.36 dBV/m

### HAC-RF Emission

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/26/2015;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1380; Calibrated: 7/13/2015
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

### Dipole E-Field measurement/2450 MHz/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 86.76 V/m; Power Drift = 0.04 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 90.77 V/m

Near-field category: **M3 (AWF 0 dB)**

PMF scaled E-field

Grid 1 <b>M3</b> <b>82.43 V/m</b>	Grid 2 <b>M3</b> <b>83.13 V/m</b>	Grid 3 <b>M3</b> <b>81.62 V/m</b>
Grid 4 <b>M3</b> <b>83.06 V/m</b>	Grid 5 <b>M3</b> <b>84.43 V/m</b>	Grid 6 <b>M3</b> <b>83.45 V/m</b>
Grid 7 <b>M3</b> <b>89.29 V/m</b>	Grid 8 <b>M3</b> <b>90.77 V/m</b>	Grid 9 <b>M3</b> <b>89.02 V/m</b>

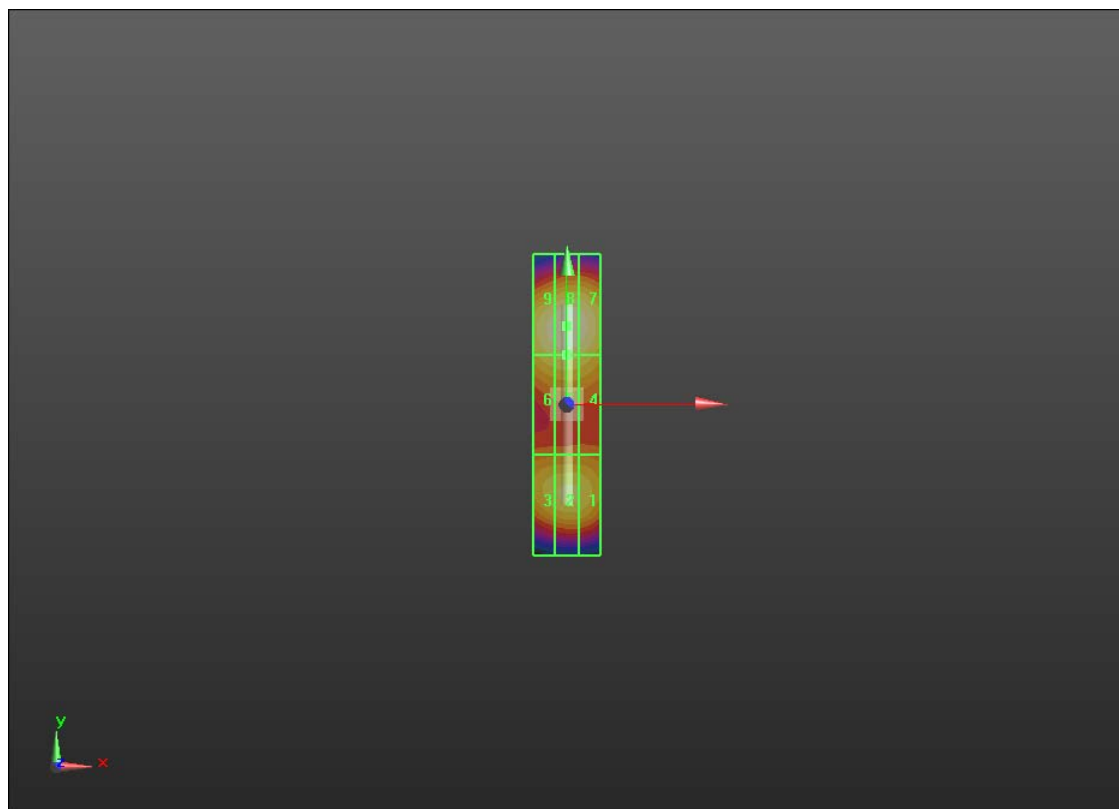

0 dB = 90.77 V/m = 39.16 dBV/m