



**FCC CFR47 PART 22H, 24E, 27L, AND 90S  
CERTIFICATION TEST REPORT**

**FOR**

**CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS**

**MODEL NUMBERS: A1723, A1724**

**FCC ID: BCG-E3042A**

**REPORT NUMBER: 15U21635-E7V2**

**ISSUE DATE: FEBRUARY 01, 2016**

*Prepared for*

**APPLE, INC.**

**1 INFINITE LOOP**

**CUPERTINO, CA 95014, U.S.A.**

*Prepared by*

**UL VERIFICATION SERVICES INC.**

**47173 BENICIA STREET**

**FREMONT, CA 94538, U.S.A.**

**TEL: (510) 771-1000**

**FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	01/22/2016	Initial Review	C. Pang
V2	02/01/2016	Revised report to address TCB's questions	T. Chu

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>6</b>
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	7
4.2. SAMPLE CALCULATION .....	8
4.3. MEASUREMENT UNCERTAINTY.....	8
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. DESCRIPTION OF EUT .....	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.2.1. LAT.....	9
5.2.2. UAT .....	12
5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	14
5.4. SOFTWARE AND FIRMWARE.....	14
5.5. WORST-CASE CONFIGURATION AND MODE.....	14
5.6. DESCRIPTION OF TEST SETUP.....	15
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>17</b>
<b>7. RF POWER OUTPUT VERIFICATION .....</b>	<b>18</b>
7.1. GSM.....	18
7.1.1. PORT A GSM (LAT) .....	20
7.1.2. PORT B GSM (UAT).....	20
7.2. CDMA2000.....	21
7.2.1. PORT A CDMA2000 (LAT) .....	22
7.2.2. PORT B CDMA2000 (UAT).....	26
7.3. 1xEV-DO - Release 0 (REV 0).....	30
7.3.1. PORT A 1xEV-DO REV 0 (LAT) .....	31
7.3.2. PORT B 1xEV-DO - REV 0 (UAT).....	32
7.4. CDMA2000 1xEV-DO -Revision A (REV A).....	33
7.4.1. PORT A 1xEV-DO - REV A (LAT).....	34
7.4.2. PORT B 1xEV-DO - REV A (UAT) .....	35
7.5. UMTS .....	36
7.5.1. PORT A UMTS REL99 (LAT).....	37
7.5.2. PORT B UMTS REL99 (UAT) .....	37
7.6. HSDPA REL 5 .....	38
7.6.1. PORT A HSDPA REL 5 (LAT) .....	39
7.6.2. PORT B HSDPA REL 5 (UAT).....	40
7.7. HSPA REL 6 (HSDPA & HSUPA).....	41
7.7.1. PORT A HSPA REL 6 (LAT) .....	42

7.7.2.	PORT B HSPA REL 6 (UAT)	44
7.8.	DUAL CARRIER HSDPA	46
7.8.1.	PORT A DUAL CARRIER HSDPA (LAT)	48
7.8.2.	PORT B DUAL CARRIER HSDPA (UAT)	49
<b>8.</b>	<b>CONDUCTED TEST RESULTS</b>	<b>50</b>
8.1.	OCCUPIED BANDWIDTH	50
8.1.1.	GSM GPRS	54
8.1.2.	GSM EGPRS	57
8.1.3.	CDMA2000 1xRTT	60
8.1.4.	CDMA2000 EVDO Rev. A	68
8.1.5.	UMTS REL 99	76
8.1.6.	UMTS HSDPA	82
8.2.	BAND EDGE	88
8.2.1.	GSM-GPRS	89
8.2.2.	GSM-EGPRS	91
8.2.3.	CDMA2000 1xRTT	93
8.2.4.	CDMA2000 1xRTT BC10 MASK	97
8.2.5.	CDMA2000 EVDO REV A	99
8.2.6.	CDMA2000 EVDO REV A BC10 MASK	103
8.2.7.	UMTS REL 99	105
8.2.8.	UMTS HSDPA	108
8.3.	OUT OF BAND EMISSIONS	111
8.3.1.	GSM-GPRS	112
8.3.2.	GSM-EGPRS	115
8.3.3.	CDMA2000 1xRTT	119
8.3.4.	CDMA2000 EVDO REV A	127
8.3.5.	UMTS REL 99	135
8.3.6.	UMTS HSDPA	141
<b>9.</b>	<b>FREQUENCY STABILITY</b>	<b>147</b>
9.1.	GSM	148
9.2.	CDMA2000	150
9.3.	UMTS	152
<b>10.</b>	<b>RADIATED TEST RESULTS</b>	<b>154</b>
10.1.	RADIATED POWER (ERP & EIRP) (LAT)	154
10.1.1.	GSM	156
10.1.2.	CDMA2000	157
10.1.3.	UMTS	158
10.1.4.	GSM	159
10.1.5.	CDMA2000	163
10.1.6.	UMTS	171
10.2.	RADIATED POWER (ERP & EIRP) (UAT)	177
10.2.1.	GSM	177
10.2.2.	CDMA2000	178
10.2.3.	UMTS	179
10.2.4.	GSM	180
10.2.5.	CDMA2000	184

---

10.2.6.	UMTS.....	192
10.3.	PEAK-TO-AVERAGE RATIO .....	198
10.4.	FIELD STRENGTH OF SPURIOUS RADIATION (LAT) .....	210
10.4.1.	GSM.....	212
10.4.2.	CDMA2000.....	216
10.4.3.	UMTS.....	224
10.5.	FIELD STRENGTH OF SPURIOUS RADIATION (UAT).....	230
10.5.1.	GSM.....	230
10.5.2.	CDMA2000.....	234
10.5.3.	UMTS.....	242
<b>11.</b>	<b>SETUP PHOTOS .....</b>	<b>248</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE  
1 INFINITE LOOP  
CUPERTINO, CA 95014, U.S.A.

**EUT DESCRIPTION:** CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

**MODELS:** A1723, A1724

**SERIAL NUMBER:** C39QT02RH2JF (CONDUCTED); C39Q403AGR24 (RADIATED)

**DATE TESTED:** AUGUST 24, 2015 – JANUARY 13, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 22H, 24E, 27L, AND 90S	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



CHIN PANG  
SENIOR ENGINEER  
UL VERIFICATION SERVICES INC.

Tested By:



TINA CHU  
LAB ENGINEER  
UL VERIFICATION SERVICES INC.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-D, FCC CFR 47 Part 2, FCC CFR 47 Part 22, FCC CFR Part 24, FCC Part 27 and FCC KDB 971168 D01 v02r02.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F
	<input checked="" type="checkbox"/> Chamber G
	<input checked="" type="checkbox"/> Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

## 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

## 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT, Model A1723 and A1724 is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/CDMA/WCDMA/HSPA+/DC-HSDPA/LTE radio, IEEE 802.11a/b/g/n/ac radio, Bluetooth radio and NFC. The rechargeable battery is not user accessible.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum average conducted and ERP / EIRP output powers as follows:

#### 5.2.1. LAT

##### GSM MODES

###### Part 22 850MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824- 849	GPRS	33.5	2238.7	30.1	1025.7
	EGPRS	28.0	631.0	24.4	277.3

###### Part 24 1900MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 - 1910	GPRS	30.5	1122.0	31.1	1291.2
	EGPRS	27.0	501.2	28.1	645.7

**CDMA2000 MODES**

**Part 90 800MHz Band**

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
816 - 824	CDMA 2000 1xRTT	25.0	316.2	20.9	121.6
	CDMA 2000 EVDO-Rev A	25.0	316.2	20.6	114.6

**Part 22 850MHz Band**

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824 - 849	CDMA 2000 1xRTT	25.0	316.2	21.2	131.2
	CDMA 2000 EVDO-Rev A	25.0	316.2	21.2	130.6

**Part 24 1900MHz Band**

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 - 1910	CDMA 2000 1xRTT	22.3	169.8	23.8	241.5
	CDMA 2000 EVDO-Rev A	22.3	169.8	23.9	242.7

**Part 27 1700MHz Band**

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1710 - 1755	CDMA 2000 1xRTT	23.0	199.5	22.4	173.8
	CDMA 2000 EVDO-Rev A	23.0	199.5	22.4	172.6

**UMTS MODES**

**Part 22 850MHz Band**

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824 – 849	REL 99	25.0	316.2	22.4	173.0
	HSDPA REL 5	24.0	251.2	21.3	134.3

**Part 24 1900MHz Band**

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 – 1910	REL 99	22.5	177.8	23.7	236.0
	HSDPA REL 5	21.5	141.3	22.8	189.2

**Part 27 1700MHz Band**

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1710– 1755	REL 99	22.7	187.9	23.6	229.6
	HSDPA REL 5	21.8	151.4	22.7	187.5

## 5.2.2. UAT

### GSM MODES

#### Part 22 850MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824- 849	GPRS	33.2	2089.3	25.7	369.8
	EGPRS	27.7	588.8	20.9	122.5

#### Part 24 1900MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 - 1910	GPRS	29.9	977.2	26.4	432.5
	EGPRS	26.4	436.5	22.7	185.4

### CDMA2000 MODES

#### Part 90 800MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
816 - 824	CDMA 2000 1xRTT	24.7	295.1	16.7	46.7
	CDMA 2000 EVDO-Rev A	24.7	295.1	16.6	45.8

#### Part 22 850MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824 – 849	CDMA 2000 1xRTT	24.7	295.1	17.2	52.5
	CDMA 2000 EVDO-Rev A	24.7	295.1	17.1	51.5

#### Part 24 1900MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 – 1910	CDMA 2000 1xRTT	22.0	158.5	19.0	78.5
	CDMA 2000 EVDO-Rev A	22.0	158.5	18.9	77.1

#### Part 27 1700MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1710 – 1755	CDMA 2000 1xRTT	23.7	234.4	19.2	83.9
	CDMA 2000 EVDO-Rev A	23.7	234.4	19.2	82.6

**UMTS MODES**

**Part 22 850MHz Band**

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
824 – 849	REL 99	24.7	295.1	20.0	100.0
	HSDPA REL 5	23.7	233.3	19.1	81.3

**Part 24 1900MHz Band**

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 – 1910	REL 99	22.5	177.8	19.9	97.5
	HSDPA REL 5	21.5	141.3	19.0	79.8

**Part 27 1700MHz Band**

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1710– 1755	REL 99	24.3	269.2	19.6	91.2
	HSDPA REL 5	23.3	212.8	18.7	73.3

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Port A (LAT) Gain (dBi)	Port B (UAT) Gain (dBi)
816 - 824	-3.01	-6.55
824 - 849	-1.77	-5.27
1850 - 1910	1.08	-3.08
1710 - 1755	0.51	-4.68

### 5.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 13E180, Baseband 4.70.10.

The EUT is linked with Agilent 8960 and CMW500 Communication Test Sets.

### 5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case is EUT on the highest power. Based on Peak Power measurement investigations, the following modes should be considered as worst-case scenario for all other measurements.

Worst-case modes:

- GSM GPRS
- GSM EGPRS
- CDMA 2000 1xRTT
- CDMA 2000 EVDO REV. A
- UMTS REL 99
- UMTS HSDPA

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that Y orientation was worst-case orientation for cell bands; X orientation was worst-case orientation for pcs bands without AC/DC adapter and headset.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
Laptop	Dell	Latitude D630	N/A
AC/DC adapter	Dell	PA-1900-02D	N/A
DC power supply	Sorensen	XT 15-4	N/A

### I/O CABLES (RF Conducted Test)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US 115V	Un-shielded	2m	N/A
2	DC	1	DC	Un-shielded	1.4m	N/A
3	RF In/Out	1	EUT	Un-shielded	0.4m	N/A
4	RF In/Out	1	Barrel	N/A	N/A	N/A
5	RF In/Out	1	Communication Test Set	Un-shielded	1m	N/A

### I/O CABLES (RF Radiated Test)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5m	NA

### TEST SETUP

**CONDUCTED SETUP**

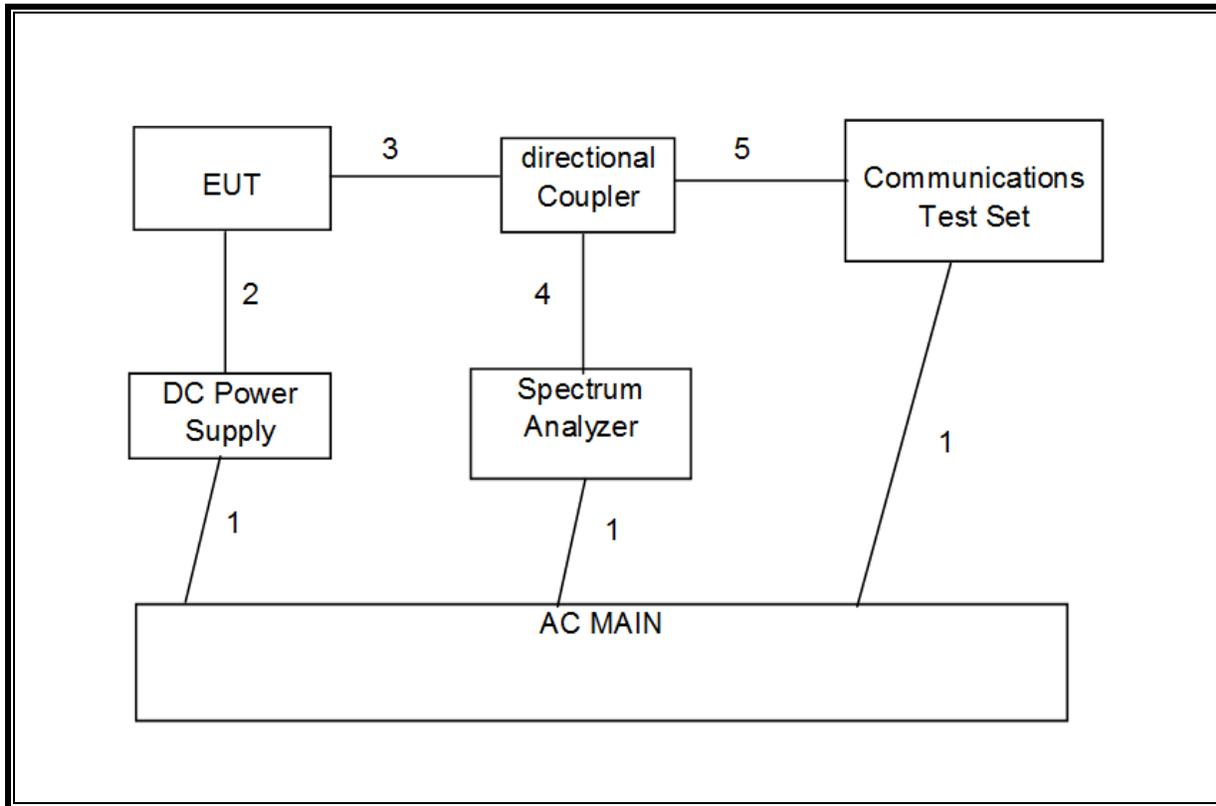

**RADIATED SETUP**

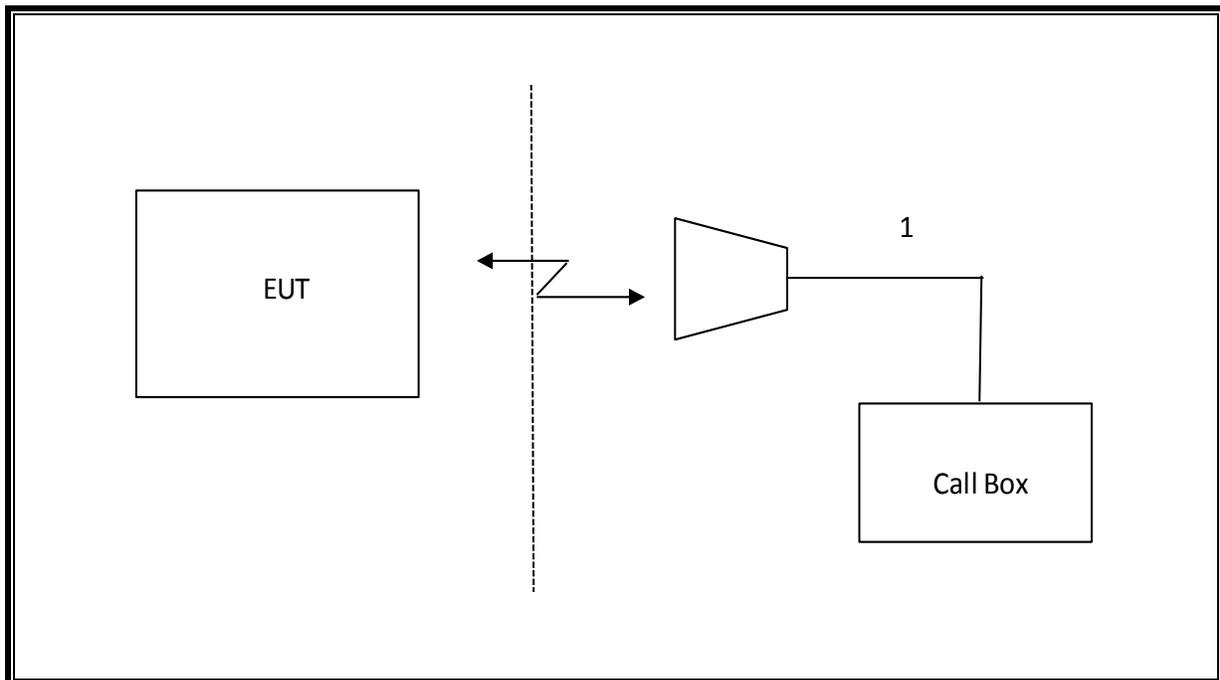

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	T No.	Cal Due
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4446A	T177	03/07/16
Wideband Communication Test Set, Call Box	Rohde & Schwarz	CMW500	T971	07/23/16
Directional Coupler, 10dB SMA, 0.5GHz to 26.5GHz	Krytar	152610	T922	06/10/16
Chamber, Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	T754	03/21/16
Wideband Communication Test Set, Call Box	Rohde & Schwarz	CMW500	T703	02/11/16
Wireless Communications Test Set, 8960 Series 10	Keysight	E5515C	T211	11/19/16
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	T905	05/26/16
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T862	04/10/16
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T899	04/30/16
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T834	06/08/16
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T491	04/25/16
Wideband Communication Test Set, Call Box	Rohde & Schwarz	CMW500	T260	07/10/16
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T900	04/10/16
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T863	04/10/16
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T835	06/09/16
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T495	10/22/16
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	T906	06/11/16
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	T447	05/12/16
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Agilent	8449B	T404	06/29/16
Spectrum Analyzer, 40 GHz	Agilent	8564E	T106	08/06/16
Tuned Dipole, 400 - 1000MHz	ETS Lindgren	3121C DB4	T273	05/05/16
Antenna, Horn 1-18GHz	Emco	3115	T59	11/18/16
Filter, Highpass 4.0GHz	Micro-Tronics	HPM 13351	T1239	06/24/16
Filter, HPF 1.2GHz	Wainwright Instruments	WHKX1.2/15G-6ST	T1182	04/24/16
Filter, HPF 3.0GHz	Micro-Tronics	HPM 17543	T897	06/16/16

## 7. RF POWER OUTPUT VERIFICATION

### 7.1. GSM

#### Using CMU200 Communication Test Set

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press **Connection control** to choose the different menus

Press **RESET** > choose all to reset all settings

Connection	Press <b>Signal Off</b> to turn off the signal and change settings Network Support > GSM+GPRS or GSM+EGPRS Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off
MS Signal	Press Slot Config bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850/900 > 27 dBm for EGPRS 850/900 > 30 dBm for GPRS1800/1900 > 26 dBm for EGPRS1800/1900
BS Signal	Enter the same channel number for TCH channel (test channel) and BCCH channel  Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]  Channel Type > Off P0> 4 dB Slot Config > Unchanged (if already set under MS Signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 (Default)
Network	Coding Scheme > CS 4 (GPRS) and MCS5-9 (EGPRS) Bit Stream > 2E9-1PSR Bit Pattern
AF/RF	Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection	Press <b>Signal On</b> to turn on the signal and change settings

**Using Agilent 8960A Communication Test Set**

**System Config:** GSM/GPRS Mobile Test  
E1968A A.06.31

**Call Params:** BCH → Cell Band: GSM850/PCS  
TCH → Traffic Band: GSM850/PCS  
Traffic Channel: 128/192/251 or 512/661/810  
MS Tx Level: 0  
PDTCH → Traffic Band: GSM850/PCS  
Traffic Channel: 128/192/251 512/661/810  
MS Tx Level: 0  
Coding Scheme: CS-4 (GPRS)  
Coding Scheme: MCS-5 to 9 (EGPRS)  
MultiSlot Config: 1up, 1 down (Assuming that the highest  
conducted power)

**Control:** Active Cell → GSM/GPRS

### 7.1.1. PORT A GSM (LAT)

#### GPRS/EGPRS

Mode	Ch.	f (MHz)	1 time slot		2 time slots	
			Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)
GPRS	128	824.2	33.6	33.5	30.6	30.5
	190	836.6	<b>33.6</b>	<b>33.5</b>	30.4	30.3
	251	848.8	33.6	33.5	30.4	30.3
	512	1850.2	30.5	30.4	27.5	27.5
	661	1880	30.6	30.5	27.6	27.5
	810	1909.8	<b>30.6</b>	<b>30.5</b>	27.6	27.5
EGPRS	128	824.2	<b>31.1</b>	<b>28.0</b>	30.9	27.9
	190	836.6	30.8	27.9	30.8	27.8
	251	848.8	30.9	27.9	30.8	27.9
	512	1850.2	29.9	26.9	29.7	26.8
	661	1880.0	29.9	27.0	29.6	26.7
	810	1909.8	<b>30.0</b>	<b>27.0</b>	29.8	26.8

### 7.1.2. PORT B GSM (UAT)

#### GPRS/EGPRS

Mode	Ch.	f (MHz)	1 time slot		2 time slots	
			Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)
GPRS	128	824.2	33.1	33.1	30.4	30.2
	190	836.6	33.1	33.0	30.4	30.2
	251	848.8	<b>33.3</b>	<b>33.2</b>	30.3	30.1
	512	1850.2	<b>30.0</b>	<b>29.9</b>	26.9	26.8
	661	1880	29.9	29.9	27.0	26.9
	810	1909.8	29.9	29.8	26.9	26.8
EGPRS	128	824.2	<b>32.6</b>	<b>27.7</b>	32.6	27.7
	190	836.6	32.5	27.7	32.5	27.6
	251	848.8	32.4	27.7	32.3	27.7
	512	1850.2	<b>29.6</b>	<b>26.4</b>	29.6	26.4
	661	1880.0	29.5	26.3	29.4	26.3
	810	1909.8	29.4	26.4	29.4	26.3

## **7.2. CDMA2000**

Maximum output power is verified on the Low, Middle and High channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E for 1xRTT, section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rel. 0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev. A

### **CDMA2000 1xRTT**

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobile Test	B.15.18, L

- Protocol Rev > 6 (IS-2000-0)
- System ID: 18; NID: 65535, Reg. Ch. #: 610 for Cell, 600 for PCS & 450 for AWS
- Radio Config (RC) > RC1 or RC3
- Service Option (SO) Setup > SO55 or SO32
- Traffic Data Rate > Full
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

### **RESULT**

**7.2.1. PORT A CDMA2000 (LAT)**

**1xRTT, BC10, SECONDARY 800**

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 450 - 817.25MHz		CH 560 - 820MHz		CH 670 - 822.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.8	24.9	29.8	24.9	29.8	24.9
	55 (Loopback)	29.8	24.9	29.6	24.9	29.9	24.9
RC2	9 (Loopback)	29.8	24.9	<b>29.9</b>	<b>25.0</b>	29.9	24.9
	55 (Loopback)	29.9	25.0	29.8	24.9	29.3	24.9
RC3	2 (Loopback)	29.3	25.0	29.2	25.0	29.3	24.9
	55 (Loopback)	29.3	25.0	29.2	25.0	29.3	25.0
	32 (+ F-SCH)	29.2	25.0	29.2	24.9	29.2	24.9
	32 (+ SCH)	29.2	25.0	29.2	24.9	29.3	24.9
RC4	2 (Loopback)	29.3	25.0	29.2	24.9	29.4	24.9
	55 (Loopback)	29.3	25.0	29.2	25.0	29.3	25.0
	32 (+ F-SCH)	29.3	25.0	29.1	24.9	29.9	24.9
	32 (+ SCH)	29.3	25.0	29.9	25.0	29.2	24.9
RC5	9 (Loopback)	29.3	25.0	29.1	24.9	29.2	24.9
	55 (Loopback)	29.3	25.0	29.0	24.9	29.3	24.9
RC11	2 (Loopback)	29.4	25.0	29.3	24.9	29.3	24.9
	75 (Loopback)	29.4	25.0	29.3	25.0	29.2	25.0
	32 (+ F-SCH)	29.2	25.0	29.1	25.0	29.1	24.9
	32 (+ SCH)	29.3	24.9	29.2	24.9	29.1	24.9

**1xRTT, BC0, CELL BAND**

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 1013 - 824.7MHz		CH 384 - 836.52MHz		CH 777 - 848.31MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.3	25.0	29.3	24.8	29.3	24.8
	55 (Loopback)	29.6	25.0	29.4	24.8	29.4	24.8
RC2	9 (Loopback)	<b>29.7</b>	<b>25.0</b>	29.6	24.9	29.6	24.8
	55 (Loopback)	29.7	24.9	29.7	24.8	29.5	24.8
RC3	2 (Loopback)	29.5	25.0	29.3	24.9	29.5	24.8
	55 (Loopback)	29.6	24.9	29.3	24.9	29.5	24.8
	32 (+ F-SCH)	29.6	24.9	29.4	24.9	29.5	24.8
	32 (+ SCH)	29.5	25.0	29.4	24.9	29.5	24.8
RC4	2 (Loopback)	29.6	25.0	29.3	24.9	29.6	24.8
	55 (Loopback)	29.6	25.0	29.3	24.9	29.6	24.8
	32 (+ F-SCH)	29.6	24.9	29.3	24.8	29.7	24.8
	32 (+ SCH)	29.6	24.9	29.3	24.9	29.6	24.9
RC5	9 (Loopback)	29.6	24.9	29.3	24.8	29.4	24.8
	55 (Loopback)	29.6	24.9	29.3	24.9	29.4	24.8
RC11	2 (Loopback)	29.6	24.9	29.3	24.8	29.5	24.8
	75 (Loopback)	29.6	25.0	29.3	24.8	29.5	24.8
	32 (+ F-SCH)	29.6	24.9	29.3	24.8	29.5	24.8
	32 (+ SCH)	28.7	24.9	29.3	24.9	28.9	23.9

**1xRTT, BC1, PCS BAND**

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1851.25MHz		CH 600 - 1880MHz		CH 1175 - 1908.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	27.8	22.1	28.2	22.1	28.2	22.1
	55 (Loopback)	27.8	22.1	28.2	22.1	28.1	22.1
RC2	9 (Loopback)	27.8	22.1	<b>28.2</b>	<b>22.3</b>	28.2	22.1
	55 (Loopback)	27.8	22.1	28.2	22.1	28.1	22.2
RC3	2 (Loopback)	27.5	22.2	27.6	22.3	27.7	22.3
	55 (Loopback)	27.6	22.1	27.7	22.3	27.7	22.2
	32 (+ F-SCH)	27.6	22.1	27.7	22.2	28.0	22.3
	32 (+ SCH)	27.5	22.2	27.8	22.2	27.7	22.2
RC4	2 (Loopback)	27.6	22.2	27.7	22.2	27.8	22.3
	55 (Loopback)	27.5	22.2	27.7	22.3	27.8	22.2
	32 (+ F-SCH)	27.6	22.1	27.7	22.2	27.7	22.3
	32 (+ SCH)	27.6	22.1	27.7	22.2	27.8	22.3
RC5	9 (Loopback)	27.4	22.1	27.6	22.2	27.8	22.2
	55 (Loopback)	27.5	22.2	27.7	22.3	27.8	22.3
RC11	2 (Loopback)	27.6	22.2	27.7	22.2	27.7	22.3
	75 (Loopback)	27.5	22.2	27.7	22.3	27.8	22.3
	32 (+ F-SCH)	27.5	22.2	27.7	22.3	27.7	22.2
	32 (+ SCH)	27.5	22.2	27.7	22.3	27.8	22.2

**1xRTT, BC15, AWS BAND**

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1711.25MHz		CH 450 - 1732.5MHz		CH 875 - 1753.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	27.9	22.9	28.4	22.9	28.4	22.8
	55 (Loopback)	27.9	22.9	28.3	22.8	28.4	22.8
RC2	9 (Loopback)	27.9	22.9	28.4	22.8	<b>28.4</b>	<b>23.0</b>
	55 (Loopback)	27.9	22.9	28.4	22.9	28.4	22.8
RC3	2 (Loopback)	27.7	23.0	27.7	22.9	28.1	22.9
	55 (Loopback)	27.8	23.0	27.7	22.9	27.8	22.9
	32 (+ F-SCH)	27.7	23.0	27.7	22.9	27.8	22.9
	32 (+ SCH)	27.7	23.0	27.6	22.9	27.6	22.8
RC4	2 (Loopback)	27.7	23.0	27.8	22.9	27.5	22.9
	55 (Loopback)	27.7	23.0	27.7	22.9	27.5	22.9
	32 (+ F-SCH)	27.8	22.9	27.7	22.9	27.5	22.9
	32 (+ SCH)	27.8	23.0	27.7	22.9	27.8	22.9
RC5	9 (Loopback)	27.7	23.0	27.8	22.9	27.8	22.9
	55 (Loopback)	22.7	23.0	27.7	22.9	27.8	22.9
*RC11	2 (Loopback)	27.8	23.0	27.8	22.9	27.5	22.9
	75 (Loopback)	27.8	23.0	27.8	22.9	27.7	22.9
	32 (+ F-SCH)	27.8	23.0	27.9	23.0	27.5	22.8
	32 (+ SCH)	27.8	23.0	27.8	22.9	27.7	22.9

**7.2.2. PORT B CDMA2000 (UAT)**

**1xRTT, BC10, SECONDARY 800**

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 450 - 817.25MHz		CH 560 - 820MHz		CH 670 - 822.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.8	24.6	29.8	24.6	29.6	24.6
	55 (Loopback)	29.9	24.7	29.7	24.6	29.7	24.6
RC2	9 (Loopback)	<b>29.9</b>	<b>24.7</b>	29.7	24.6	29.9	24.6
	55 (Loopback)	29.8	24.7	29.6	24.6	29.7	24.6
RC3	2 (Loopback)	29.1	24.7	29.1	24.6	29.0	24.6
	55 (Loopback)	29.2	24.6	29.1	24.6	28.8	24.6
	32 (+ F-SCH)	29.1	24.6	29.1	24.6	28.7	24.6
	32 (+ SCH)	29.1	24.6	29.1	24.6	28.7	24.6
RC4	2 (Loopback)	29.1	24.6	29.1	24.6	29.0	24.6
	55 (Loopback)	29.0	24.7	29.1	24.6	28.5	24.6
	32 (+ F-SCH)	29.1	24.6	29.1	24.6	28.9	24.6
	32 (+ SCH)	29.0	24.6	29.1	24.6	29.2	24.7
RC5	9 (Loopback)	29.1	24.6	29.0	24.6	29.2	24.6
	55 (Loopback)	29.1	24.7	29.0	24.6	29.2	24.6
RC11	2 (Loopback)	29.1	24.7	29.1	24.7	28.5	24.6
	75 (Loopback)	29.1	24.7	29.0	24.7	28.5	24.6
	32 (+ F-SCH)	29.1	24.7	29.1	24.7	28.5	24.6

**1xRTT, BC0, CELL BAND**

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 1013 - 824.7MHz		CH 384 - 836.52MHz		CH 777 - 848.31MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.3	24.6	29.9	24.6	29.3	24.5
	55 (Loopback)	29.3	24.6	29.9	24.6	29.2	24.5
RC2	9 (Loopback)	29.3	24.6	<b>29.9</b>	<b>24.7</b>	29.2	24.5
	55 (Loopback)	29.2	24.6	29.7	24.6	29.2	24.5
RC3	2 (Loopback)	29.0	24.6	29.1	24.6	28.9	24.6
	55 (Loopback)	29.1	24.6	29.1	24.6	28.9	24.6
	32 (+ F-SCH)	29.0	24.6	29.1	24.6	29.0	24.6
	32 (+ SCH)	29.0	24.6	29.2	24.6	28.9	24.6
RC4	2 (Loopback)	29.0	24.6	29.1	24.6	28.9	24.6
	55 (Loopback)	29.0	24.6	29.1	24.6	29.0	24.6
	32 (+ F-SCH)	29.0	24.6	29.2	24.6	28.9	24.5
	32 (+ SCH)	29.1	24.6	29.2	24.6	28.9	24.5
RC5	9 (Loopback)	29.1	24.6	29.1	24.6	28.9	24.5
	55 (Loopback)	29.0	24.6	29.1	24.6	28.8	24.5
RC11	2 (Loopback)	29.0	24.7	29.2	24.6	28.9	24.6
	75 (Loopback)	29.0	24.7	29.2	24.6	28.9	24.6
	32 (+ F-SCH)	29.0	24.6	29.2	24.6	28.9	24.6
	32 (+ SCH)	29.0	24.6	29.1	24.6	28.9	24.5

**1xRTT, BC1, PCS BAND**

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1851.25MHz		CH 600 - 1880MHz		CH 1175 - 1908.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	26.8	21.8	27.0	21.9	26.7	21.6
	55 (Loopback)	26.9	21.9	26.9	21.9	26.8	21.6
RC2	9 (Loopback)	27.0	21.9	<b>27.1</b>	<b>22.0</b>	26.7	21.6
	55 (Loopback)	26.9	21.9	26.8	22.0	26.7	21.6
RC3	2 (Loopback)	26.1	22.0	26.2	22.0	26.0	21.7
	55 (Loopback)	26.2	22.0	26.2	22.0	26.1	21.7
	32 (+ F-SCH)	26.2	22.0	26.2	21.9	26.1	21.7
	32 (+ SCH)	26.2	21.9	26.2	21.9	26.1	21.7
RC4	2 (Loopback)	26.2	21.9	26.3	22.0	26.2	21.7
	55 (Loopback)	26.2	22.0	26.2	22.0	25.9	21.7
	32 (+ F-SCH)	26.2	21.9	26.1	21.9	25.9	21.7
	32 (+ SCH)	26.1	21.9	26.2	21.9	26.1	21.7
RC5	9 (Loopback)	26.1	21.9	26.2	22.0	26.0	21.6
	55 (Loopback)	26.2	21.9	26.2	22.0	26.0	21.7
RC11	2 (Loopback)	26.1	22.0	26.3	22.0	26.0	21.7
	75 (Loopback)	26.1	21.9	26.1	22.0	26.0	21.8
	32 (+ F-SCH)	26.2	21.9	26.3	22.0	26.1	21.7
	32 (+ SCH)	26.3	22.0	26.3	22.0	26.1	21.7

**1xRTT, BC15, AWS BAND**

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1711.25MHz		CH 450 - 1732.5MHz		CH 875 - 1753.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	28.3	23.5	27.9	23.5	27.9	23.3
	55 (Loopback)	28.2	23.5	27.9	23.5	27.8	23.4
RC2	9 (Loopback)	<b>28.6</b>	<b>23.7</b>	27.9	23.5	27.8	23.4
	55 (Loopback)	28.6	23.6	27.9	23.5	27.8	23.4
RC3	2 (Loopback)	28.0	23.6	27.8	23.5	27.7	23.4
	55 (Loopback)	28.0	23.6	27.8	23.5	27.7	23.5
	32 (+ F-SCH)	28.0	23.6	27.8	23.5	27.7	23.4
	32 (+ SCH)	27.9	23.5	27.8	23.5	27.7	23.4
RC4	2 (Loopback)	27.9	23.5	27.8	23.5	27.7	23.5
	55 (Loopback)	27.9	23.6	27.8	23.5	27.7	23.4
	32 (+ F-SCH)	27.9	23.5	27.8	23.5	27.7	23.4
	32 (+ SCH)	27.9	23.5	27.9	23.5	27.8	23.4
RC5	9 (Loopback)	27.9	23.5	27.9	23.5	27.7	23.4
	55 (Loopback)	27.9	23.6	27.9	23.5	27.7	23.4
*RC11	2 (Loopback)	27.9	23.7	27.8	23.5	27.7	23.5
	75 (Loopback)	27.9	23.7	27.8	23.6	27.7	23.5
	32 (+ F-SCH)	28.0	23.6	27.9	23.5	27.7	23.5
	32 (+ SCH)	28.0	23.6	27.8	23.5	27.7	23.5

### 7.3. 1xEV-DO - Release 0 (REV 0)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

#### EVDO Release 0 - RTAP

- Call Setup > Shift & Preset
- Call Control:
  - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
  - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
  - Cell Power > -105.5 dBm/1.23 MHz
  - Channel > (Enter channel number)
  - Application Config > Enhanced Test Application Protocol > RTAP
  - RTAP Rate > 153.6 kbps
  - Rvs Power Ctrl > Active bits
  - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

#### EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
  - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
  - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
  - Cell Power > -105.5 dBm/1.23 MHz
  - Cell Band > (Select US Cellular or US PCS)
  - Channel > (Enter channel number)
  - Application Config > Enhanced Test Application Protocol > FTAP (default)
  - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
  - Rvs Power Ctrl > Active bits
  - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

## **RESULTS**

### 7.3.1. PORT A 1xEV-DO REV 0 (LAT)

#### CDMA2000 EVDO REV. 0 800MHz SECONDARY BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	450	817.25	29.8	24.9
		560	820.00	29.6	24.8
		670	822.75	<b>29.8</b>	<b>24.9</b>

#### CDMA2000 EVDO REV 0 850MHz BAND

FTAP Rate	RTAP Rate	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2 Kbps (2 slot QPSK)	153.6 Kbps	1013	824.70	29.5	<b>24.9</b>
		384	836.52	<b>29.6</b>	24.9
		777	848.31	29.5	24.9

#### CDMA2000 EVDO REV 0 1900MHz BAND

FTAP Rate	RTAP Rate	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2 Kbps (2 slot QPSK)	153.6 Kbps	25	1851.25	27.4	22.2
		600	1880.00	<b>28.1</b>	<b>22.3</b>
		1175	1908.75	28.0	22.3

#### CDMA2000 EVDO REV. 0 1700MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	25	1711.25	28.0	23.0
		450	1732.50	28.0	23.0
		875	1753.75	<b>28.1</b>	<b>23.0</b>

### 7.3.2. PORT B 1xEV-DO - REV 0 (UAT)

#### CDMA2000 EVDO REV. 0 800MHz SECONDARY BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	450	817.25	29.7	24.7
		560	820.00	29.8	24.7
		670	822.75	<b>29.8</b>	<b>24.7</b>

#### CDMA2000 EVDO REV 0 850MHz BAND

FTAP Rate	RTAP Rate	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2 Kbps (2 slot QPSK)	153.6 Kbps	1013	824.70	29.6	24.6
		384	836.52	<b>29.7</b>	<b>24.7</b>
		777	848.31	29.6	24.7

#### CDMA2000 EVDO REV 0 1900MHz BAND

FTAP Rate	RTAP Rate	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2 Kbps (2 slot QPSK)	153.6 Kbps	25	1851.25	27.0	22.0
		600	1880.00	<b>27.0</b>	<b>22.0</b>
		1175	1908.75	26.6	21.8

#### CDMA2000 EVDO REV. 0 1700MHz BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	25	1711.25	<b>28.6</b>	<b>23.7</b>
		450	1732.50	28.6	23.6
		875	1753.75	28.6	23.6

## 7.4. CDMA2000 1xEV-DO –Revision A (REV A)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
1xEV-DO Terminal Test	A.09.13

### EVDO Rev. A – RETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000: 00000000
- > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

### EVDO Rev. A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000: 00000000
- > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

## RESULTS

### 7.4.1. PORT A 1xEV-DO - REV A (LAT)

#### CDMA2000 EVDO REV A 800MHz SECONDARY BAND

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	450	817.25	29.7	25.0
		560	820.00	29.7	25.0
		670	822.75	<b>29.9</b>	<b>25.0</b>

#### CDMA2000 EVDO REV A 850MHz BAND

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	1013	824.70	<b>29.8</b>	<b>25.0</b>
		384	836.52	29.6	24.9
		777	848.31	29.5	24.8

#### CDMA2000 EVDO REV A 1900MHz BAND

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	25	1851.25	28.2	22.2
		600	1880.00	28.2	22.3
		1175	1908.75	<b>28.4</b>	<b>22.3</b>

#### CDMA2000 EVDO REV A 1700MHz BAND

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	25	1711.25	28.4	23.0
		450	1732.50	28.4	23.0
		875	1753.75	<b>28.5</b>	<b>23.0</b>

**7.4.2. PORT B 1xEV-DO - REV A (UAT)**

**CDMA2000 EVDO REV A 800MHz SECONDARY BAND**

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	450	817.25	29.8	24.7
		560	820.00	29.8	24.7
		670	822.75	<b>29.8</b>	<b>24.7</b>

**CDMA2000 EVDO REV A 850MHz BAND**

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	1013	824.70	29.8	24.7
		384	836.52	<b>29.8</b>	<b>24.7</b>
		777	848.31	29.8	24.7

**CDMA2000 EVDO REV A 1900MHz BAND**

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	25	1851.25	27.0	22.0
		600	1880.00	<b>27.2</b>	<b>22.0</b>
		1175	1908.75	27.1	22.0

**CDMA2000 EVDO REV A 1700MHz BAND**

FETAP - Traffic Format	RETAP - Data Payload Size	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2k QPSK/ ACK channel is transmitted at all the slots	4096	25	1711.25	<b>28.8</b>	<b>23.7</b>
		450	1732.50	28.6	23.7
		875	1753.75	28.5	23.7

## 7.5. UMTS

### TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with  $VBW \geq RBW \geq 26dB$  BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

### UMTS REL99

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	$\beta_c$	Not Applicable
	$\beta_d$	Not Applicable
	$\beta_{ec}$	Not Applicable
	$\beta_c/\beta_d$	8/15
	$\beta_{hs}$	Not Applicable
	$\beta_{ed}$	Not Applicable

## RESULTS

### 7.5.1. PORT A UMTS REL99 (LAT)

#### Part 22 / RSS 132 850MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 850MHz	4132	4357	826.4	<b>29.0</b>	<b>25.0</b>
	4183	4408	836.6	28.9	24.9
	4233	4458	846.6	28.9	24.8

#### Part 24 / RSS 133 1900MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 1900MHz	9262	9662	1852.4	26.7	22.4
	9400	9800	1880.0	26.9	<b>22.5</b>
	9538	9938	1907.6	<b>27.0</b>	22.5

#### Part 27 / RSS 139 1700MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 1700MHz	1312	1537	1712.4	<b>26.7</b>	<b>22.7</b>
	1413	1638	1732.6	26.5	22.5
	1513	1738	1752.6	26.4	22.5

### 7.5.2. PORT B UMTS REL99 (UAT)

#### Part 22 / RSS 132 850MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 850MHz	4132	4357	826.4	<b>29.0</b>	<b>24.7</b>
	4183	4408	836.6	28.8	24.6
	4233	4458	846.6	28.8	24.6

#### Part 24 / RSS 133 1900MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 1900MHz	9262	9662	1852.4	<b>26.8</b>	<b>22.5</b>
	9400	9800	1880.0	26.7	22.5
	9538	9938	1907.6	26.6	22.5

#### Part 27 / RSS 139 1700MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 1700MHz	1312	1537	1712.4	28.3	24.3
	1413	1638	1732.6	<b>28.4</b>	<b>24.3</b>
	1513	1738	1752.6	28.2	24.2

## 7.6. HSDPA REL 5

The following 4 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Summary of settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	$\beta_c$	2/15	12/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	$\beta_c/\beta_d$	2/15	12/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	$D_{ACK}$	8			
	$D_{NAK}$	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
$A_{hs} = \beta_{hs}/\beta_c$	30/15				

## RESULT

**7.6.1. PORT A HSDPA REL 5 (LAT)**

**Part 22 / RSS 132 850MHz Band**

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 850MHz	1	4132	4357	826.4	<b>28.2</b>	<b>24.0</b>
		4183	4408	836.6	28.0	23.9
		4233	4458	846.6	27.9	23.8
	2	4132	4357	826.4	27.9	23.6
		4183	4408	836.6	28.1	23.6
		4233	4458	846.6	28.0	23.5
	3	4132	4357	826.4	27.9	23.6
		4183	4408	836.6	27.8	23.4
		4233	4458	846.6	27.9	23.4
	4	4132	4357	826.4	27.9	23.6
		4183	4408	836.6	27.9	23.4
		4233	4458	846.6	27.9	23.6

**Part 24 / RSS 133 1900MHz Band**

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1900MHz	1	9262	9662	1852.4	25.8	21.3
		9400	9800	1880.0	25.8	21.4
		9538	9938	1907.6	<b>26.0</b>	<b>21.5</b>
	2	9262	9662	1852.4	25.8	21.2
		9400	9800	1880.0	25.7	21.3
		9538	9938	1907.6	25.4	21.3
	3	9262	9662	1852.4	25.5	20.9
		9400	9800	1880.0	25.1	20.8
		9538	9938	1907.6	25.5	20.9
	4	9262	9662	1852.4	25.6	20.9
		9400	9800	1880.0	25.1	20.7
		9538	9938	1907.6	25.3	20.9

**Part 27 / RSS 139 1700MHz Band**

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1700MHz	1	1312	1537	1712.4	<b>25.8</b>	<b>21.7</b>
		1413	1638	1732.6	25.6	21.7
		1513	1738	1752.6	25.7	21.6
	2	1312	1537	1712.4	25.7	21.4
		1413	1638	1732.6	25.5	21.5
		1513	1738	1752.6	25.6	21.6
	3	1312	1537	1712.4	25.7	21.2
		1413	1638	1732.6	25.6	21.2
		1513	1738	1752.6	25.6	21.2
	4	1312	1537	1712.4	25.7	21.2
		1413	1638	1732.6	25.6	21.2
		1513	1738	1752.6	25.6	21.2

**7.6.2. PORT B HSDPA REL 5 (UAT)**

**Part 22 / RSS 132 850MHz Band**

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 850MHz	1	4132	4357	826.4	<b>27.9</b>	<b>23.7</b>
		4183	4408	836.6	27.8	23.6
		4233	4458	846.6	27.7	23.5
	2	4132	4357	826.4	27.7	23.5
		4183	4408	836.6	27.6	23.5
		4233	4458	846.6	27.6	23.5
	3	4132	4357	826.4	27.6	23.2
		4183	4408	836.6	27.6	23.2
		4233	4458	846.6	27.7	23.1
	4	4132	4357	826.4	27.6	23.2
		4183	4408	836.6	27.6	23.2
		4233	4458	846.6	27.7	23.1

**Part 24 / RSS 133 1900MHz Band**

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1900MHz	1	9262	9662	1852.4	26.1	21.5
		9400	9800	1880.0	26.2	21.5
		9538	9938	1907.6	<b>26.3</b>	<b>21.5</b>
	2	9262	9662	1852.4	26.2	21.5
		9400	9800	1880.0	26.2	21.3
		9538	9938	1907.6	26.0	21.5
	3	9262	9662	1852.4	25.5	21.1
		9400	9800	1880.0	25.4	21.2
		9538	9938	1907.6	25.8	21.2
	4	9262	9662	1852.4	25.7	21.2
		9400	9800	1880.0	25.9	21.2
		9538	9938	1907.6	26.1	21.3

**Part 27 / RSS 139 1700MHz Band**

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1700MHz	1	1312	1537	1712.4	<b>27.4</b>	23.3
		1413	1638	1732.6	27.4	<b>23.3</b>
		1513	1738	1752.6	27.2	23.2
	2	1312	1537	1712.4	27.3	23.3
		1413	1638	1732.6	27.3	23.3
		1513	1738	1752.6	27.2	23.3
	3	1312	1537	1712.4	27.0	22.8
		1413	1638	1732.6	26.9	22.9
		1513	1738	1752.6	27.0	22.8
	4	1312	1537	1712.4	27.0	22.8
		1413	1638	1732.6	27.0	22.7
		1513	1738	1752.6	27.1	22.8

## 7.7. HSPA REL 6 (HSDPA & HSUPA)

### TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
	$\beta_{ed}$	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

### RESULTS

**7.7.1. PORT A HSPA REL 6 (LAT)**

**Part 22 / RSS 132 850MHz Band**

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSUPA 850MHz	1	4132	4357	826.4	27.4	<b>24.0</b>
		4183	4408	836.6	27.6	23.9
		4233	4458	846.6	<b>27.9</b>	23.8
	2	4132	4357	826.4	26.6	21.9
		4183	4408	836.6	26.5	21.9
		4233	4458	846.6	26.6	21.9
	3	4132	4357	826.4	27.3	23.1
		4183	4408	836.6	27.3	23.1
		4233	4458	846.6	27.6	23.0
	4	4132	4357	826.4	26.4	21.6
		4183	4408	836.6	26.1	21.7
		4233	4458	846.6	26.0	21.6
	5	4132	4357	826.4	27.6	23.9
		4183	4408	836.6	27.7	23.9
		4233	4458	846.6	27.54	23.82

**Part 24 / RSS 133 1900MHz Band**

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 1900MHz (Band 2)	1	9262	9662	1852	25.8	21.2
		9400	9800	1880	<b>25.9</b>	<b>21.4</b>
		9538	9938	1908	25.9	21.4
	2	9262	9662	1852	25.3	19.3
		9400	9800	1880	25.2	19.4
		9538	9938	1908	25.1	19.7
	3	9262	9662	1852	25.7	20.1
		9400	9800	1880	25.4	20.3
		9538	9938	1908	25.9	20.4
	4	9262	9662	1852	25.0	19.2
		9400	9800	1880	25.3	19.3
		9538	9938	1908	25.1	19.5
	5	9262	9662	1852	25.8	21.3
		9400	9800	1880	25.7	21.4
		9538	9938	1908	25.8	21.3

**Part 27 / RSS 139 1700MHz Band**

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSUPA 1700MHz	1	1312	1537	1712.4	<b>25.8</b>	<b>21.7</b>
		1413	1638	1732.6	25.7	21.6
		1513	1738	1752.6	25.7	21.7
	2	1312	1537	1712.4	25.1	20.1
		1413	1638	1732.6	25.1	20.1
		1513	1738	1752.6	25.1	20.1
	3	1312	1537	1712.4	25.5	20.8
		1413	1638	1732.6	25.4	20.8
		1513	1738	1752.6	25.4	20.8
	4	1312	1537	1712.4	24.9	20.6
		1413	1638	1732.6	25.1	20.6
		1513	1738	1752.6	25.1	20.7
	5	1312	1537	1712.4	25.7	21.6
		1413	1638	1732.6	25.7	21.6
		1513	1738	1752.6	25.7	21.7

**7.7.2. PORT B HSPA REL 6 (UAT)**

**Part 22 / RSS 132 850MHz Band**

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSUPA 850MHz	1	4132	4357	826.4	<b>27.9</b>	<b>23.7</b>
		4183	4408	836.6	27.8	23.6
		4233	4458	846.6	27.9	23.7
	2	4132	4357	826.4	27.3	21.6
		4183	4408	836.6	27.1	21.6
		4233	4458	846.6	27.3	21.6
	3	4132	4357	826.4	27.5	22.9
		4183	4408	836.6	27.6	22.8
		4233	4458	846.6	27.6	22.6
	4	4132	4357	826.4	27.0	21.5
		4183	4408	836.6	27.3	21.7
		4233	4458	846.6	27.3	21.6
	5	4132	4357	826.4	27.8	23.6
		4183	4408	836.6	27.9	23.6
		4233	4458	846.6	27.7	23.6

**Part 24 / RSS 133 1900MHz Band**

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 1900MHz (Band 2)	1	9262	9662	1852	<b>26.0</b>	<b>21.7</b>
		9400	9800	1880	25.4	21.7
		9538	9938	1908	25.9	21.7
	2	9262	9662	1852	25.7	19.7
		9400	9800	1880	25.4	19.9
		9538	9938	1908	25.7	19.7
	3	9262	9662	1852	25.9	20.8
		9400	9800	1880	25.9	20.9
		9538	9938	1908	25.8	20.8
	4	9262	9662	1852	25.7	19.7
		9400	9800	1880	25.8	19.8
		9538	9938	1908	25.8	19.8
	5	9262	9662	1852	26.0	21.6
		9400	9800	1880	25.8	21.6
		9538	9938	1908	26.0	21.6

**Part 27 / RSS 139 1700MHz Band**

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSUPA 1700MHz	1	1312	1537	1712.4	27.4	23.3
		1413	1638	1732.6	<b>27.4</b>	<b>23.3</b>
		1513	1738	1752.6	27.2	23.2
	2	1312	1537	1712.4	26.4	21.7
		1413	1638	1732.6	26.5	21.8
		1513	1738	1752.6	26.2	21.6
	3	1312	1537	1712.4	27.3	22.4
		1413	1638	1732.6	27.2	22.5
		1513	1738	1752.6	26.9	22.3
	4	1312	1537	1712.4	26.4	21.6
		1413	1638	1732.6	26.6	21.8
		1513	1738	1752.6	26.3	21.8
	5	1312	1537	1712.4	27.2	23.2
		1413	1638	1732.6	27.3	23.2
		1513	1738	1752.6	27.2	23.3

## 7.8. DUAL CARRIER HSDPA

### DC-HSDPA (Rel 8, CAT 24)

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:  
 Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

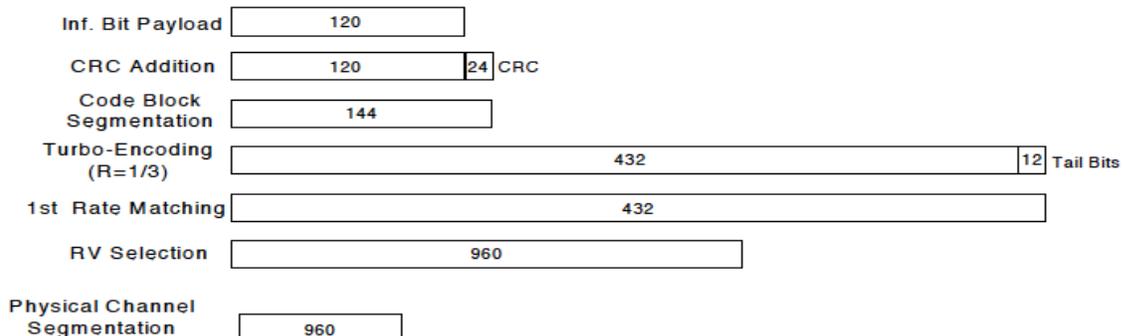

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1A			
	Power Control Algorithm	Algorithm2			
	$\beta_c$	2/15	12/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	$\beta_d$ (SF)	64			
	$\beta_c/\beta_d$	2/15	12/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
MPR	0	0	0.5	0.5	
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs = $\beta_{hs} / \beta_c$	30/15			

**RESULT**

### 7.8.1. PORT A DUAL CARRIER HSDPA (LAT)

#### Part 22 / RSS 132 850MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 850MHz	1	4132	4357	826.4	<b>28.0</b>	<b>23.9</b>
		4183	4408	836.6	27.9	23.9
		4233	4458	846.6	27.8	23.8
	2	4132	4357	826.4	27.8	23.9
		4183	4408	836.6	27.9	23.8
		4233	4458	846.6	27.7	23.8
	3	4132	4357	826.4	27.7	23.4
		4183	4408	836.6	27.8	23.3
		4233	4458	846.6	27.8	23.3
	4	4132	4357	826.4	27.6	23.5
		4183	4408	836.6	27.7	23.4
		4233	4458	846.6	27.7	23.3

#### Part 24 / RSS 133 1900MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1900MHz	1	9262	9662	1852.4	25.7	21.3
		9400	9800	1880.0	25.6	21.3
		9538	9938	1907.6	<b>25.8</b>	<b>21.4</b>
	2	9262	9662	1852.4	25.6	21.2
		9400	9800	1880.0	25.5	21.2
		9538	9938	1907.6	25.4	21.3
	3	9262	9662	1852.4	25.3	20.8
		9400	9800	1880.0	25.4	20.7
		9538	9938	1907.6	25.4	20.7
	4	9262	9662	1852.4	25.4	20.6
		9400	9800	1880.0	25.1	20.7
		9538	9938	1907.6	25.1	20.8

#### Part 27 / RSS 139 1700MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1700MHz	1	1312	1537	1712.4	<b>25.8</b>	<b>21.7</b>
		1413	1638	1732.6	25.6	21.7
		1513	1738	1752.6	25.7	21.6
	2	1312	1537	1712.4	25.7	21.7
		1413	1638	1732.6	25.7	21.6
		1513	1738	1752.6	25.6	21.7
	3	1312	1537	1712.4	25.7	21.1
		1413	1638	1732.6	25.7	21.2
		1513	1738	1752.6	25.7	21.2
	4	1312	1537	1712.4	25.7	21.2
		1413	1638	1732.6	25.6	21.2
		1513	1738	1752.6	25.6	21.3

### 7.8.2. PORT B DUAL CARRIER HSDPA (UAT)

#### Part 22 / RSS 132 850MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 850MHz	1	4132	4357	826.4	<b>27.9</b>	<b>23.7</b>
		4183	4408	836.6	27.7	23.6
		4233	4458	846.6	27.6	23.6
	2	4132	4357	826.4	27.3	23.6
		4183	4408	836.6	27.2	23.7
		4233	4458	846.6	27.4	23.6
	3	4132	4357	826.4	27.1	23.2
		4183	4408	836.6	27.3	23.2
		4233	4458	846.6	27.1	23.1
	4	4132	4357	826.4	27.2	23.1
		4183	4408	836.6	27.1	23.1
		4233	4458	846.6	27.2	23.1

#### Part 24 / RSS 133 1900MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1900MHz	1	9262	9662	1852.4	<b>26.0</b>	<b>21.7</b>
		9400	9800	1880.0	25.9	21.6
		9538	9938	1907.6	25.8	21.6
	2	9262	9662	1852.4	25.8	21.6
		9400	9800	1880.0	25.6	21.6
		9538	9938	1907.6	25.9	21.6
	3	9262	9662	1852.4	25.7	21.2
		9400	9800	1880.0	25.8	21.3
		9538	9938	1907.6	25.6	21.2
	4	9262	9662	1852.4	25.7	21.2
		9400	9800	1880.0	25.5	21.3
		9538	9938	1907.6	25.6	21.2

#### Part 27 / RSS 139 1700MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1700MHz	1	1312	1537	1712.4	<b>27.4</b>	23.2
		1413	1638	1732.6	27.4	<b>23.3</b>
		1513	1738	1752.6	27.2	23.1
	2	1312	1537	1712.4	27.2	23.2
		1413	1638	1732.6	27.0	23.2
		1513	1738	1752.6	26.6	23.1
	3	1312	1537	1712.4	27.0	22.7
		1413	1638	1732.6	27.0	22.8
		1513	1738	1752.6	26.7	22.6
	4	1312	1537	1712.4	26.9	22.7
		1413	1638	1732.6	26.7	22.8
		1513	1738	1752.6	26.7	22.6

## **8. CONDUCTED TEST RESULTS**

### **8.1. OCCUPIED BANDWIDTH**

#### **RULE PART(S)**

FCC: §2.1049

#### **LIMITS**

For reporting purposes only

#### **TEST PROCEDURE**

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

#### **RESULTS**

**GSM-GPRS MODE PART 22 AND 24**

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
CELL	GPRS	128	824.2	255.5461	304.930
		190	836.6	246.7308	305.460
		251	848.8	236.2014	281.365

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
PCS	GPRS	512	1850.2	243.1638	292.156
		661	1880.0	243.1984	312.556
		810	1909.8	243.8938	310.644

**GSM-EGPRS MODE PART 22 AND 24**

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
CELL	EGPRS	128	824.2	254.7440	309.760
		190	836.6	245.9180	296.976
		251	848.8	244.1194	296.339

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
PCS	EGPRS	512	1850.2	240.8400	302.211
		661	1880.0	239.0317	272.901
		810	1909.8	237.2904	293.144

**CDMA2000 1xRTT, PART 22, 24, 27 AND 90**

Band	Mode	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
CELL	CDMA 2000 1xRTT	1013	824.70	1.2621	1.371
		384	836.52	<b>1.2827</b>	1.392
		777	848.31	1.2820	1.383
PCS		25	1851.25	<b>1.2862</b>	1.422
		600	1880.00	1.2766	1.386
AWS		1175	1908.75	1.2758	1.403
		25	1711.25	<b>1.2782</b>	1.415
		450	1732.50	1.2564	1.385
800 MHz Secondary		875	1753.75	1.2735	1.406
		450	817.25	1.2704	1.395
	560	820.00	<b>1.2755</b>	1.400	
	670	822.75	1.2569	1.396	

**CDMA2000 EVDO REV A, PART 22, 24, 27 AND 90**

Band	Mode	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
CELL	CDMA 2000 EVDO Rev. A	1013	824.70	<b>1.2832</b>	1.414
		384	836.52	1.2803	1.414
		777	848.31	1.2699	1.395
PCS		25	1851.25	<b>1.2855</b>	1.389
		600	1880.00	1.2609	1.384
AWS		1175	1908.75	1.2573	1.389
		25	1711.25	1.2663	1.403
		450	1732.50	1.2651	1.387
800 MHz Secondary		875	1753.75	<b>1.2687</b>	1.400
		450	817.25	<b>1.2846</b>	1.404
	560	820.00	1.2834	1.403	
	670	822.75	1.2562	1.399	

**UMTS REL99 MODE PART 22, 24, AND 27**



PART 22, 24, AND 27					
Band	Mode	DL Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
850MHz	UMTS Rel. 99	4357	826.40	4.0866	4.511
		4408	836.60	<b>4.1872</b>	4.579
		4458	846.60	4.1144	<b>4.589</b>
1900MHz		9662	1852.40	4.2001	4.636
		9800	1880.00	<b>4.2359</b>	<b>4.664</b>
		9938	1907.60	4.2302	4.566
1700MHz		1537	1712.40	4.1901	4.557
		1638	1732.60	4.1912	4.566
		1738	1752.60	<b>4.2093</b>	<b>4.611</b>


**UMTS HSDPA MODE PART 22, 24, AND 27**

PART 22, 24, AND 27					
Band	Mode	DL Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
850MHz	UMTS HSDPA	4357	826.40	<b>4.1819</b>	<b>4.639</b>
		4408	836.60	4.1608	4.604
		4458	846.60	4.0904	4.627
1900MHz		9662	1852.40	4.1063	4.576
		9800	1880.00	4.1705	4.541
		9938	1907.60	<b>4.1868</b>	<b>4.655</b>
1700MHz		1537	1712.40	4.2071	<b>4.624</b>
		1638	1732.60	<b>4.2231</b>	4.545
		1738	1752.60	4.192	4.547


### 8.1.1. GSM GPRS



#### 850MHz BAND

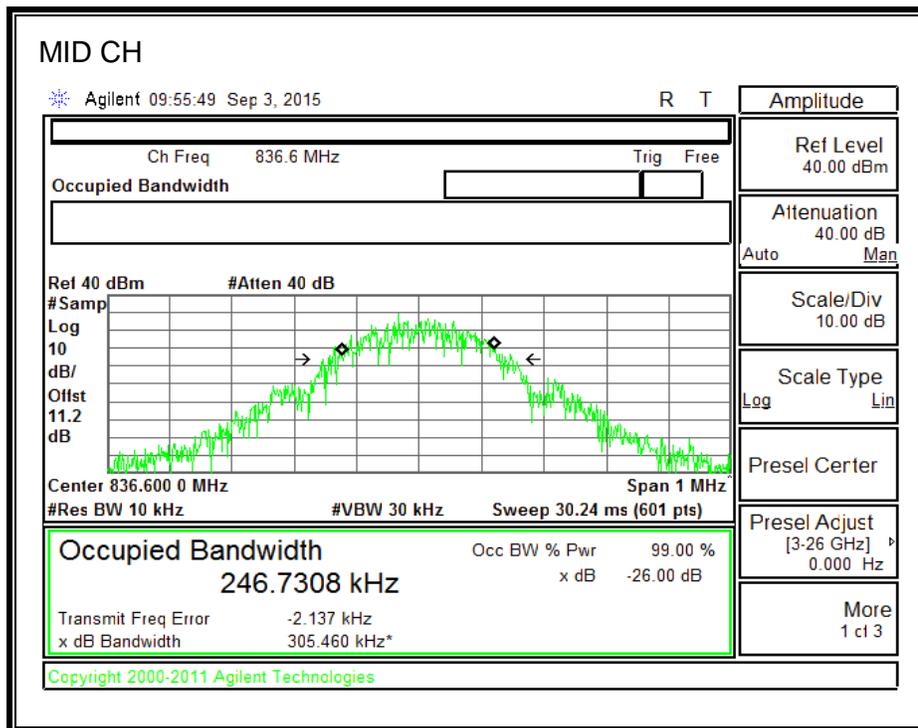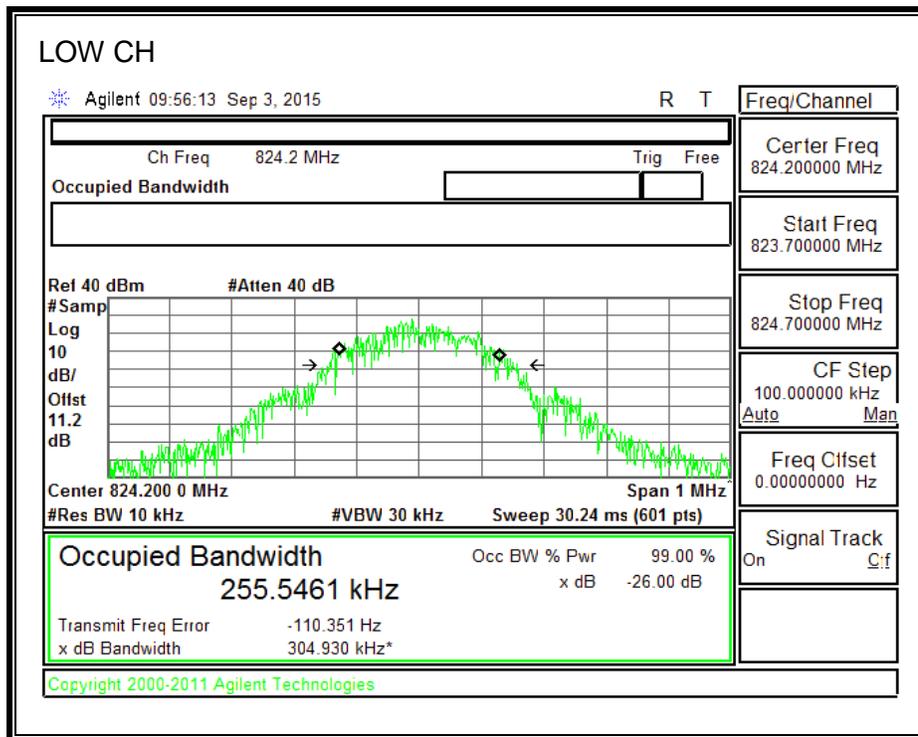

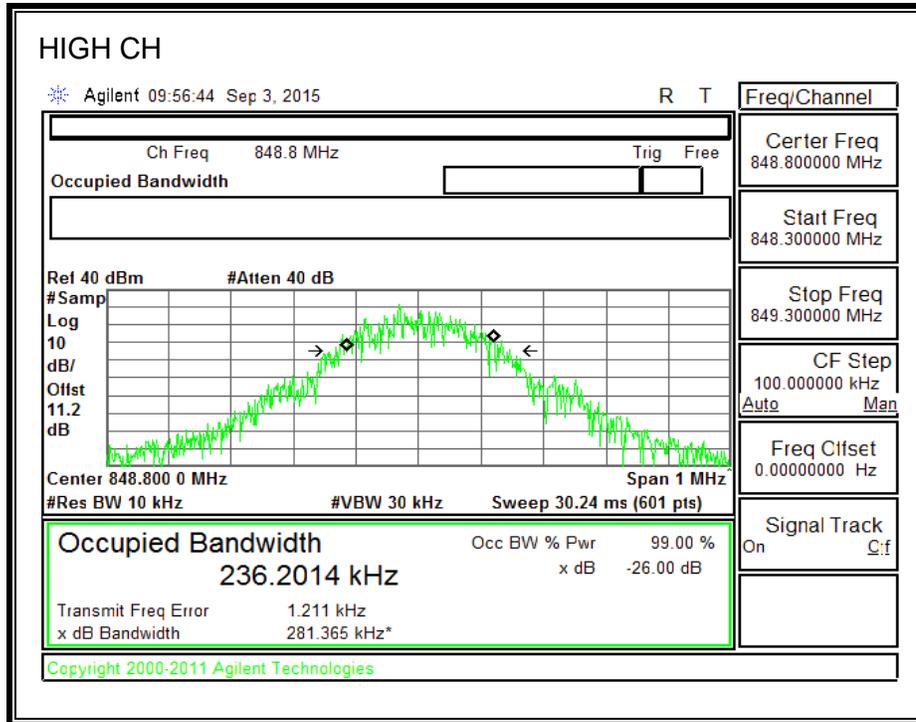



**1900MHz BAND**

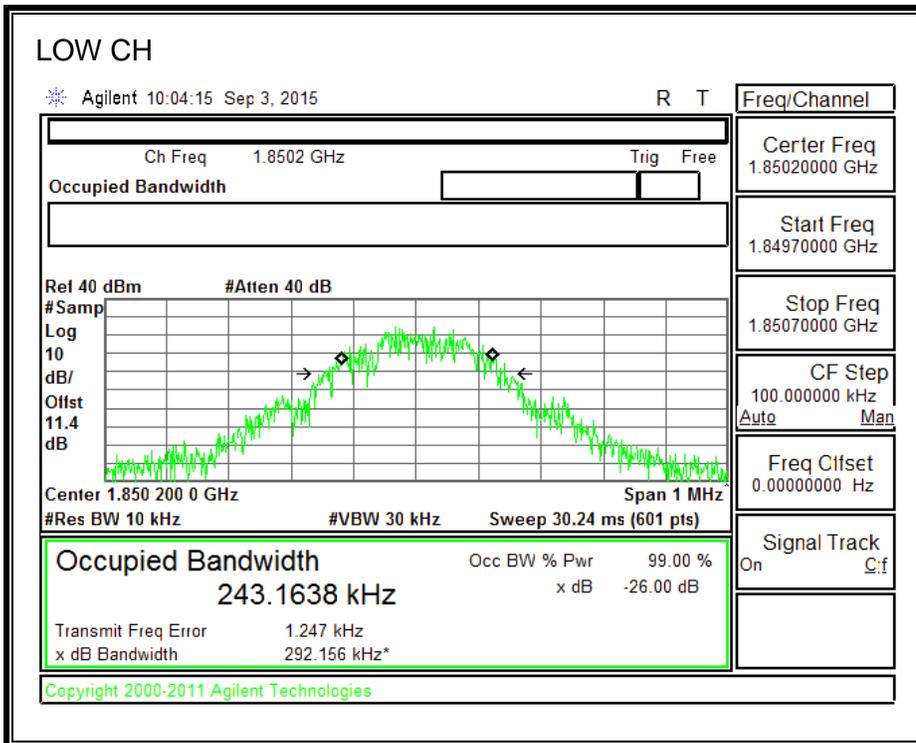


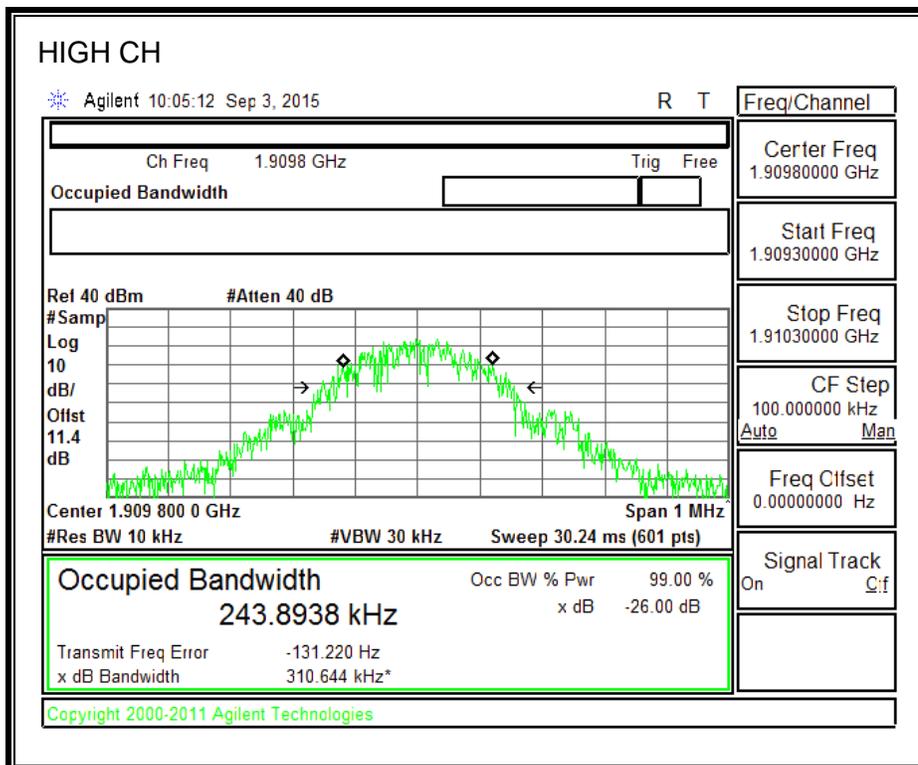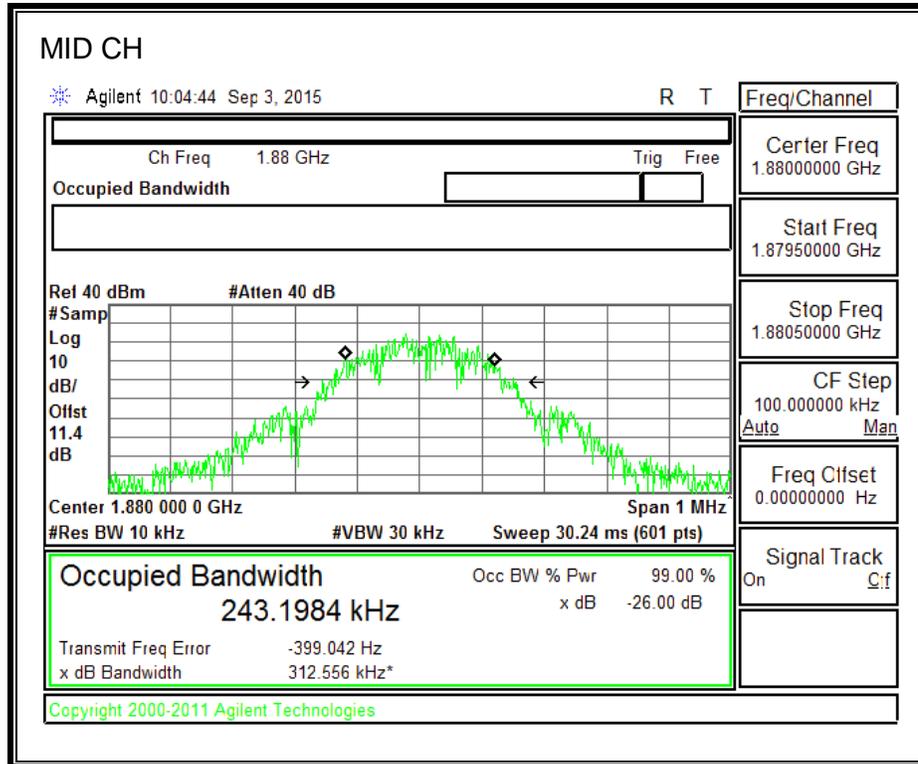


### 8.1.2. GSM EGPRS



#### 850MHz BAND

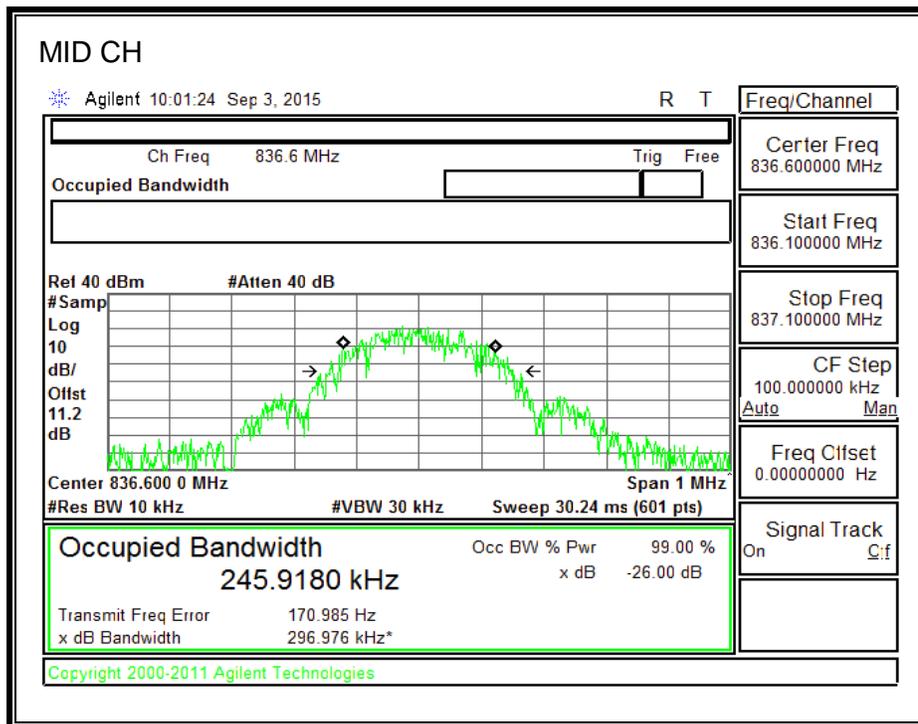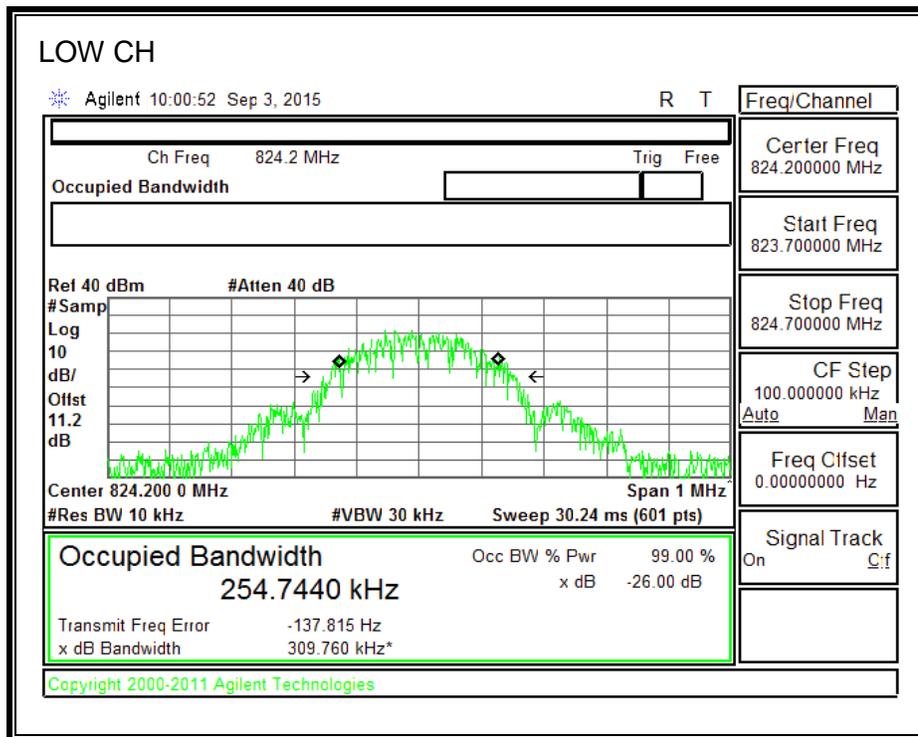

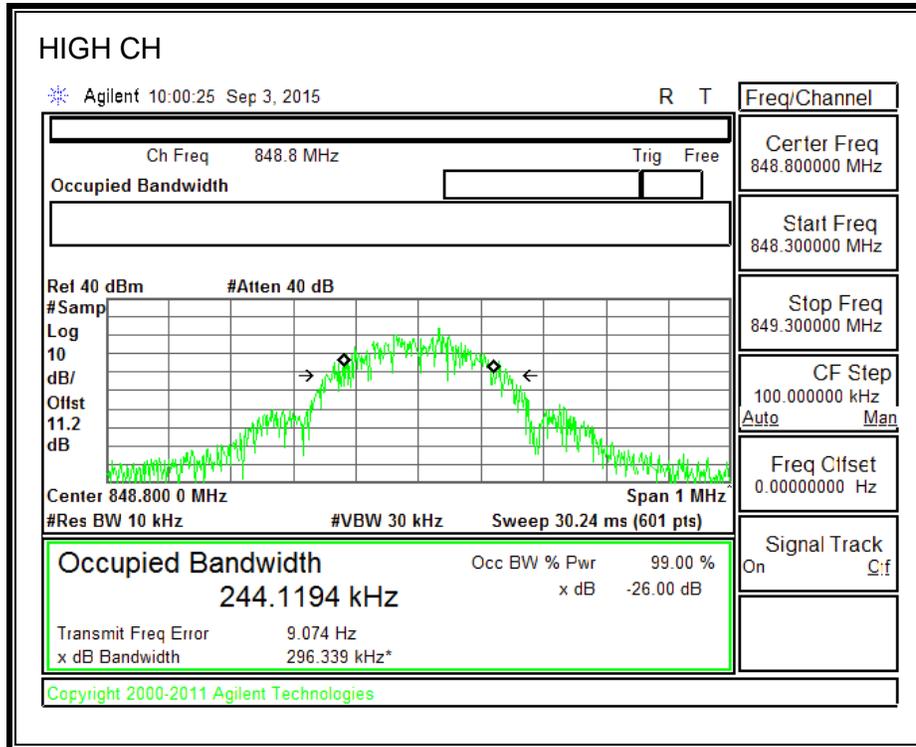



**1900MHz BAND**

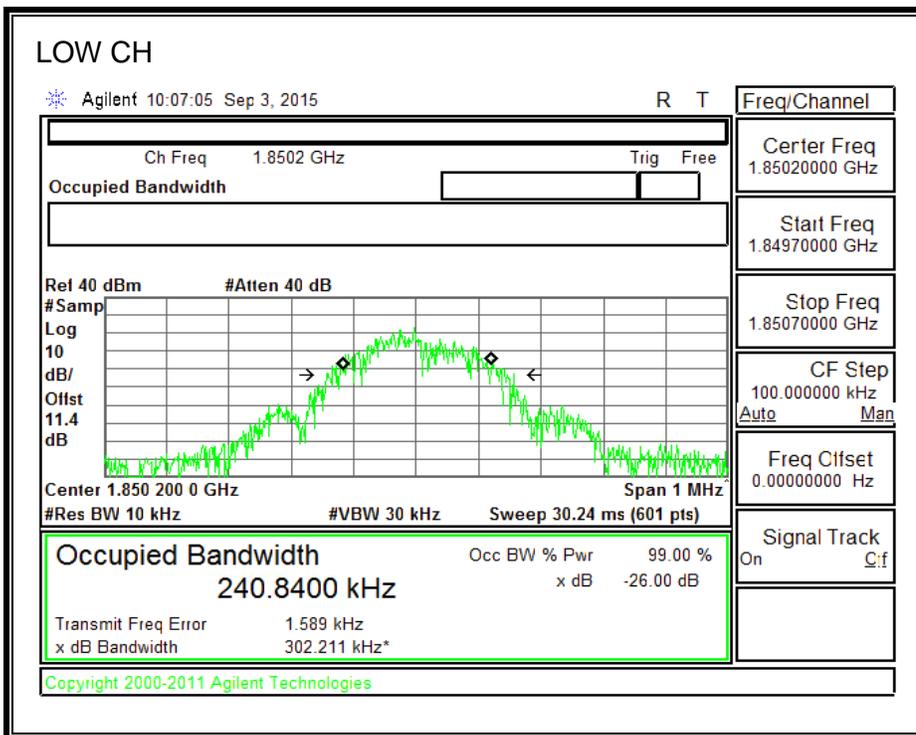


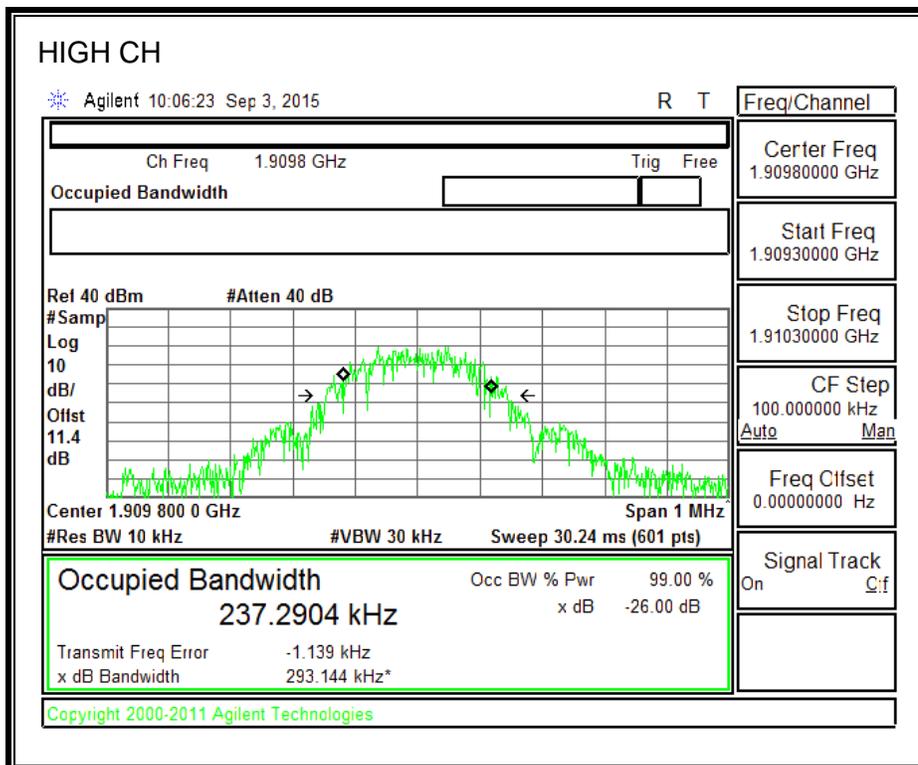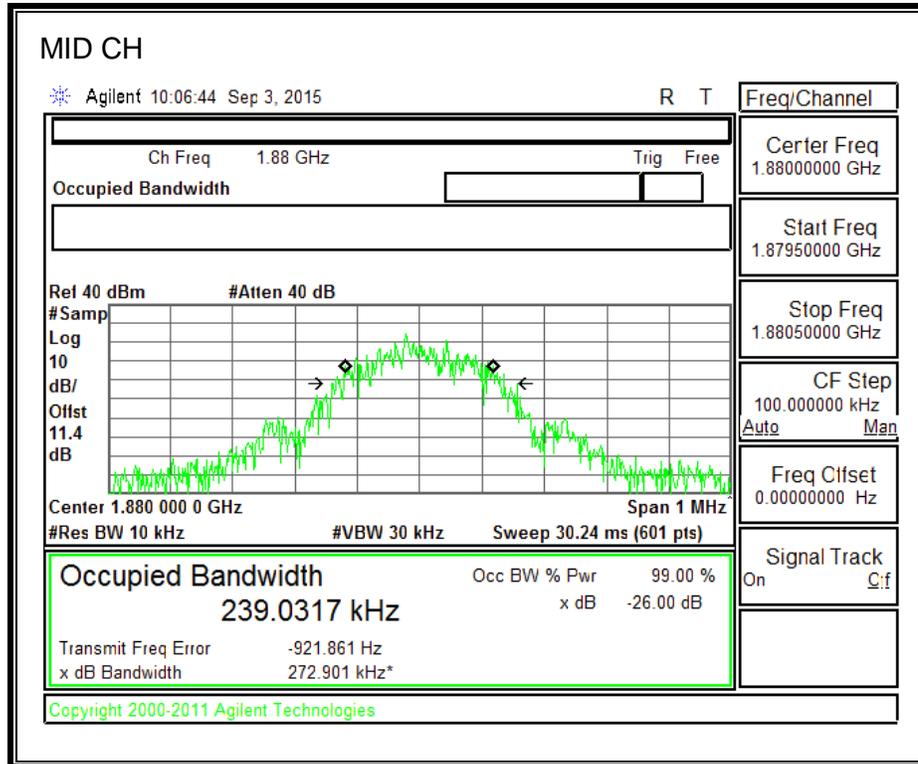



### 8.1.3. CDMA2000 1xRTT


#### 850MHz BAND

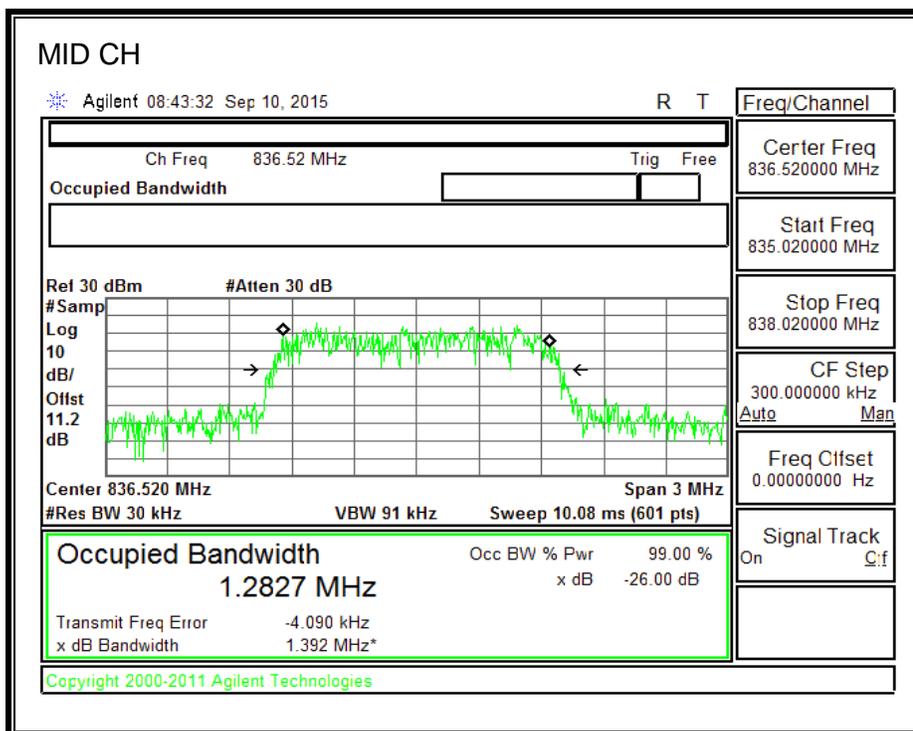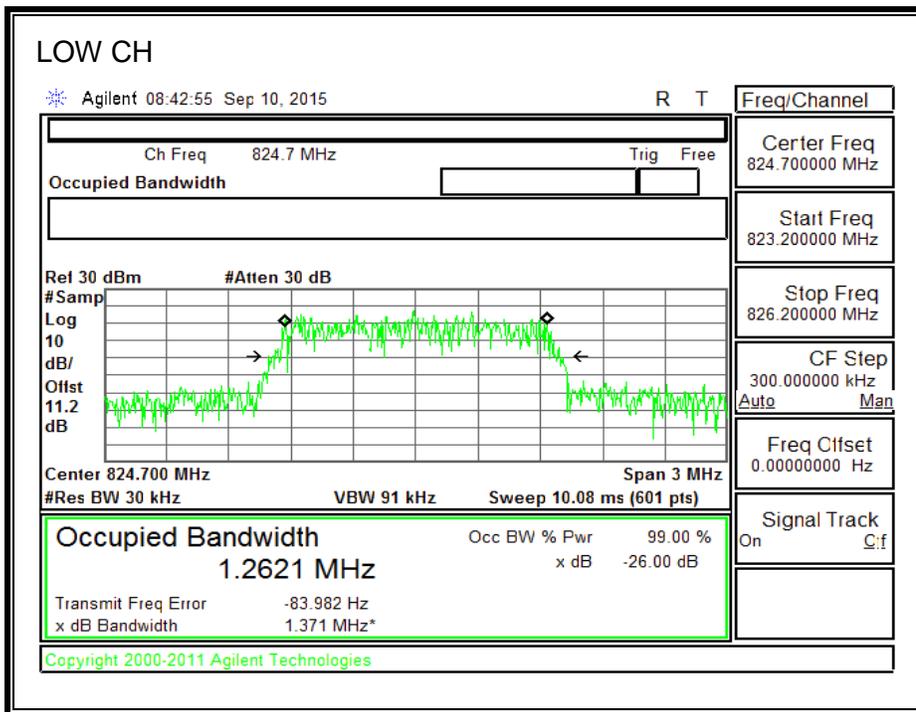


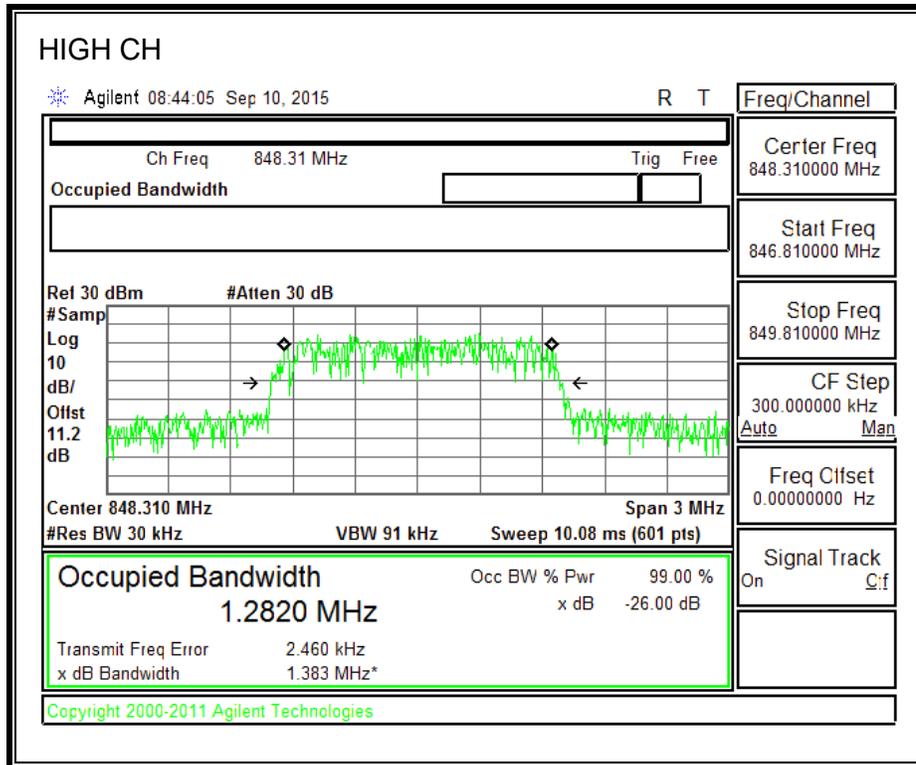



**1900MHz BAND**

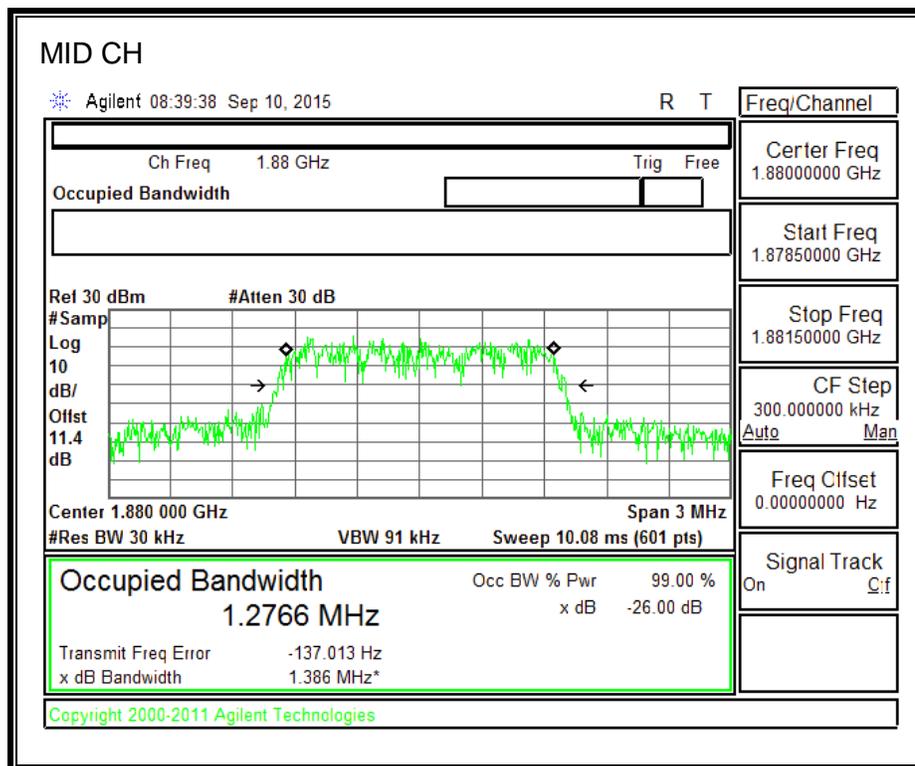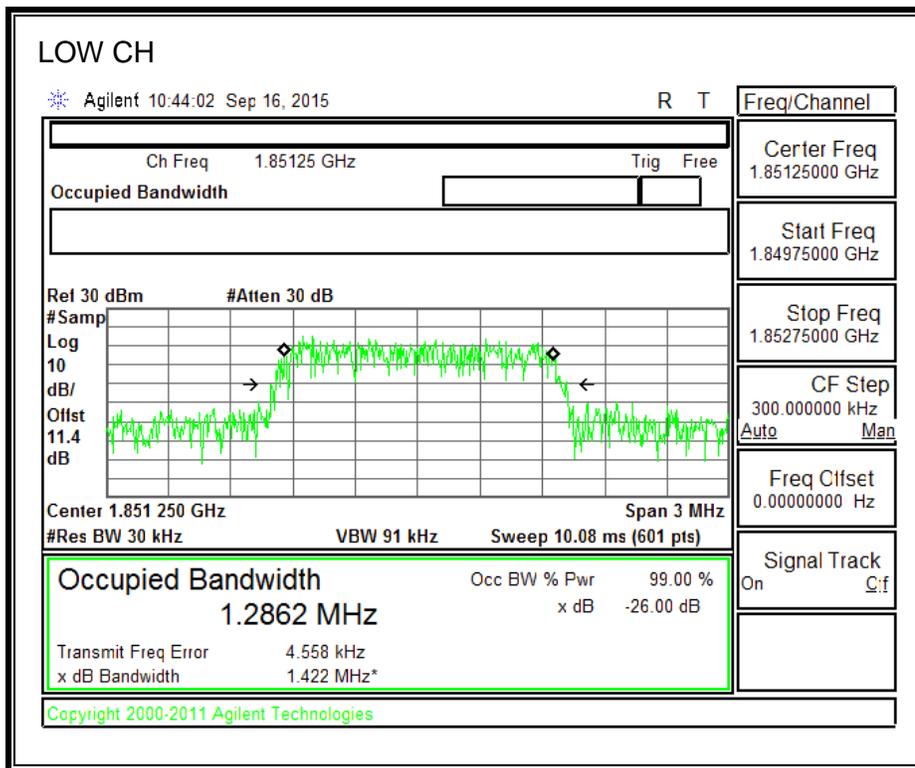


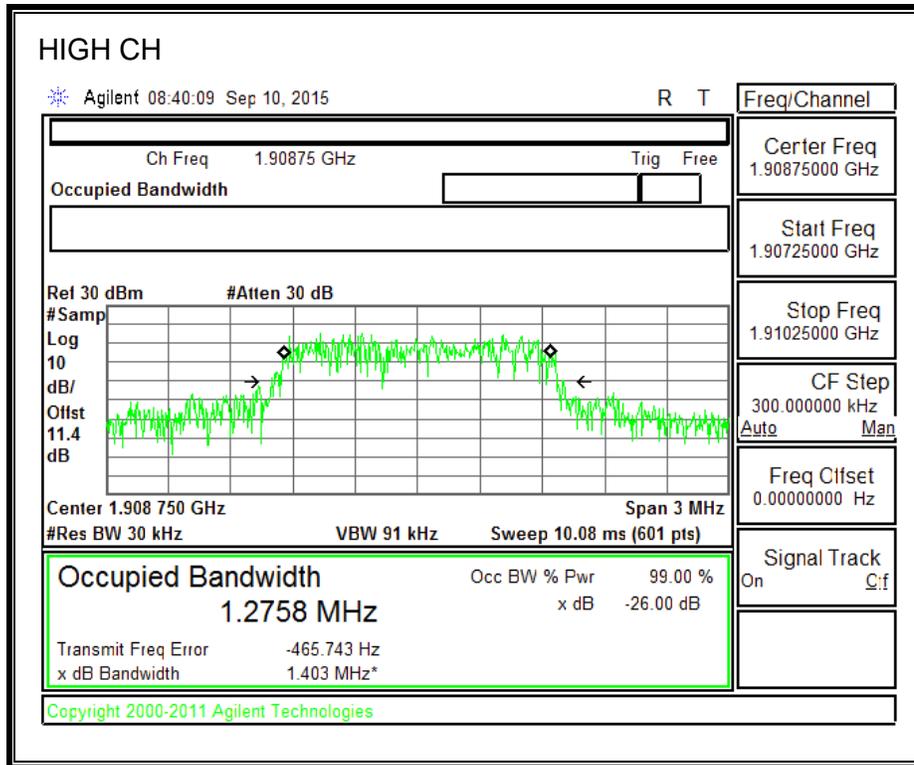



**1700MHz BAND**

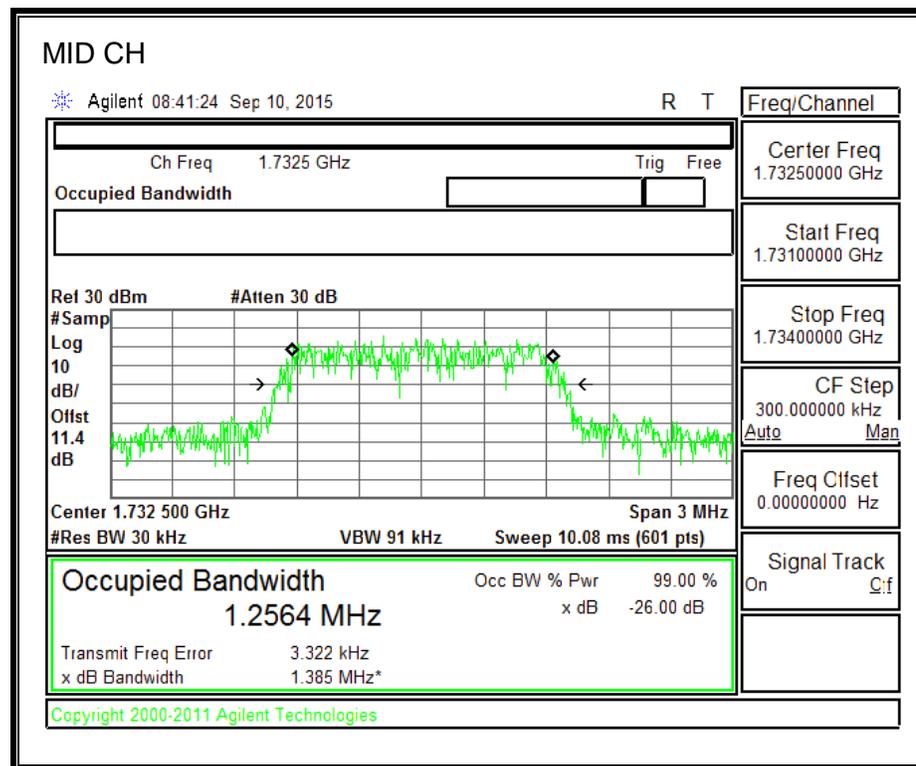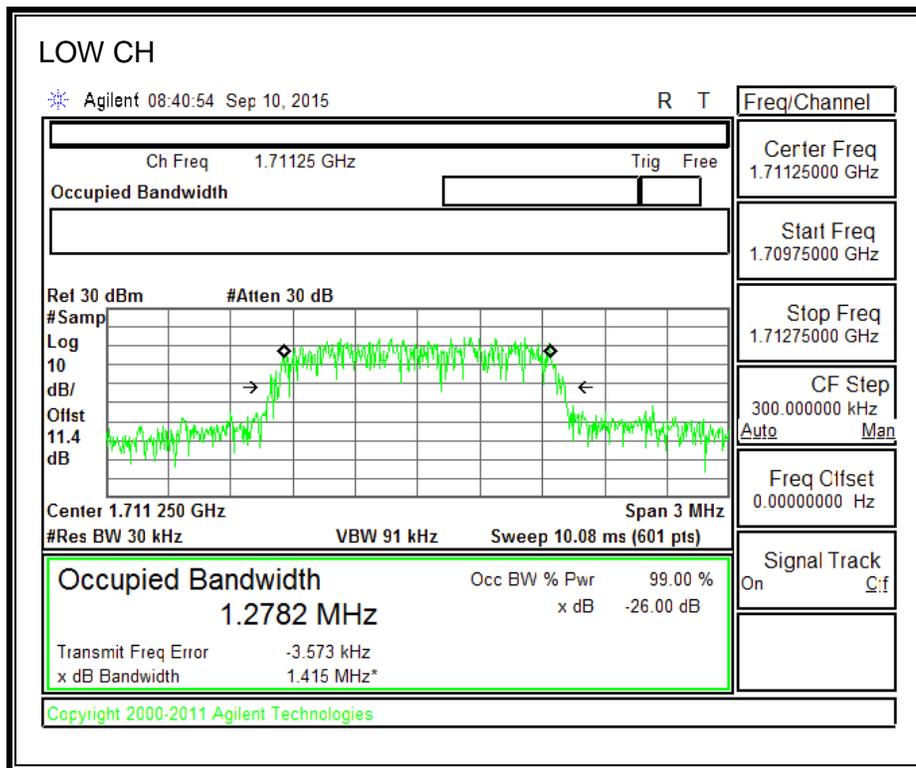

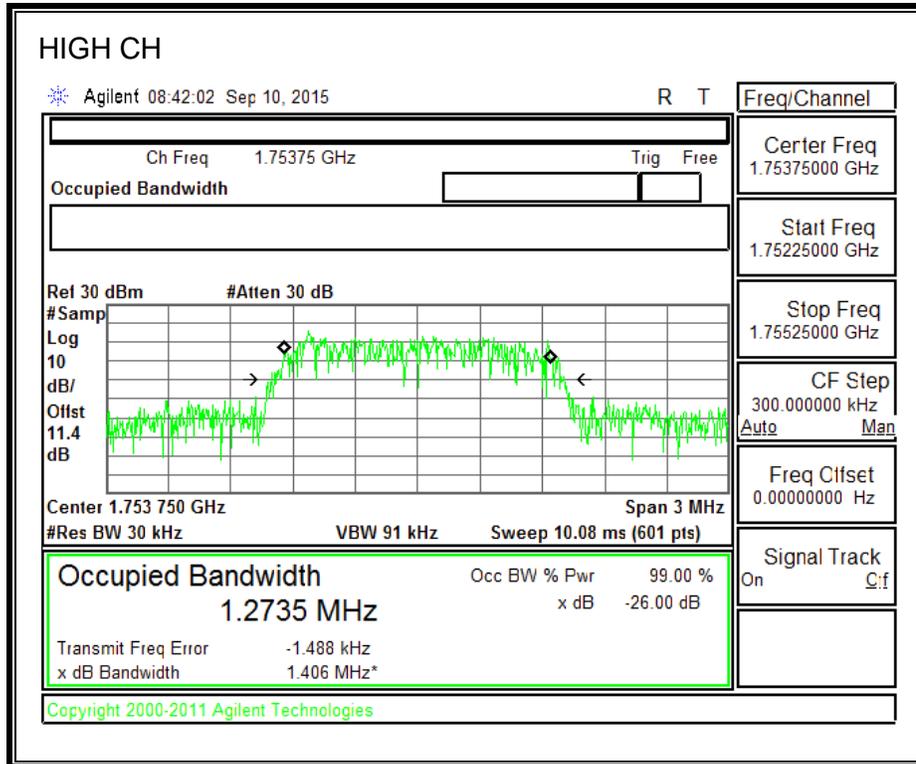



**800MHz SECONDARY BAND**

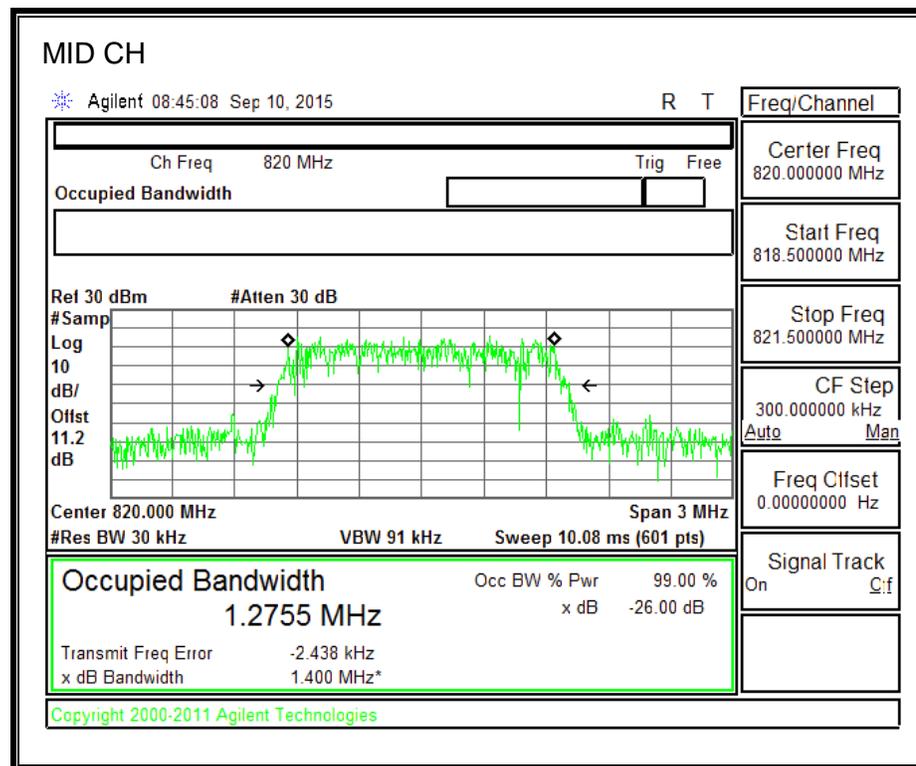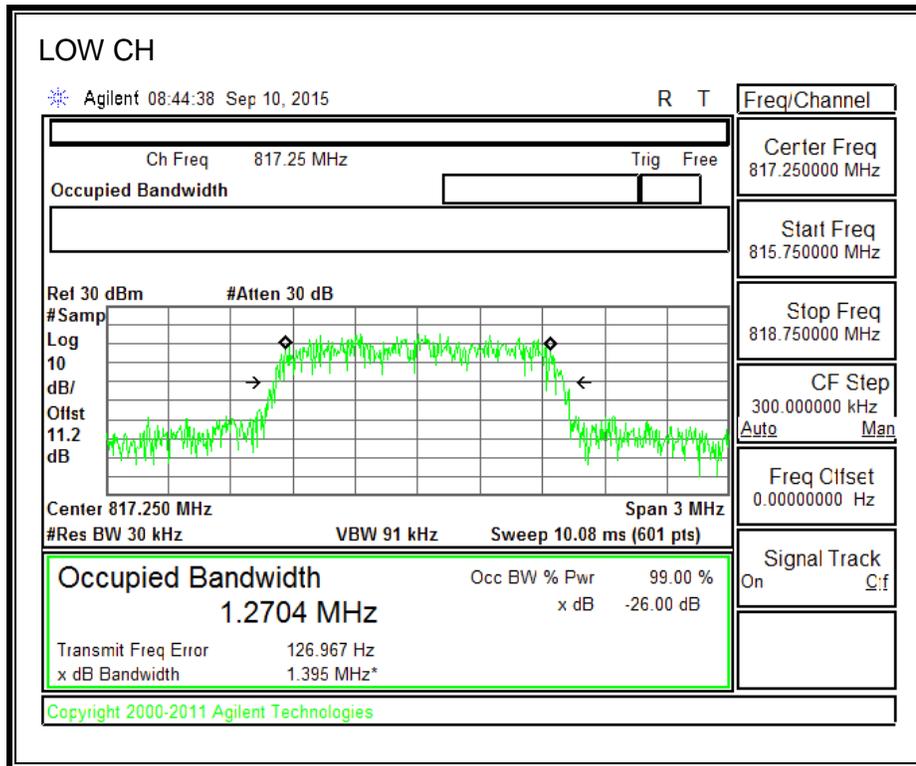


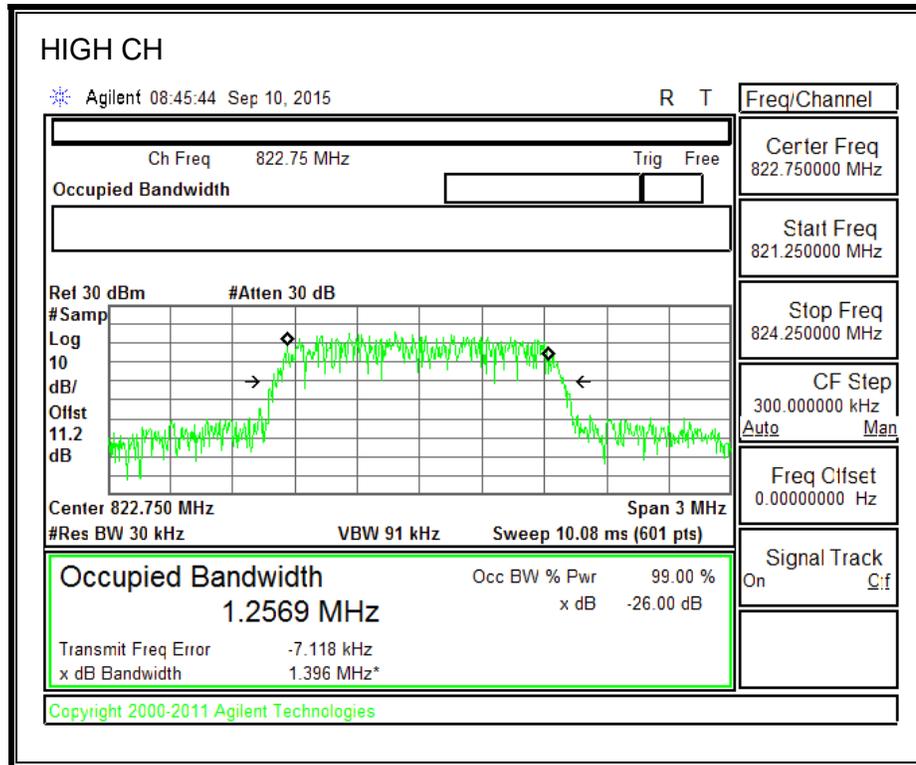



### 8.1.4. CDMA2000 EVDO Rev. A


#### 850MHz BAND

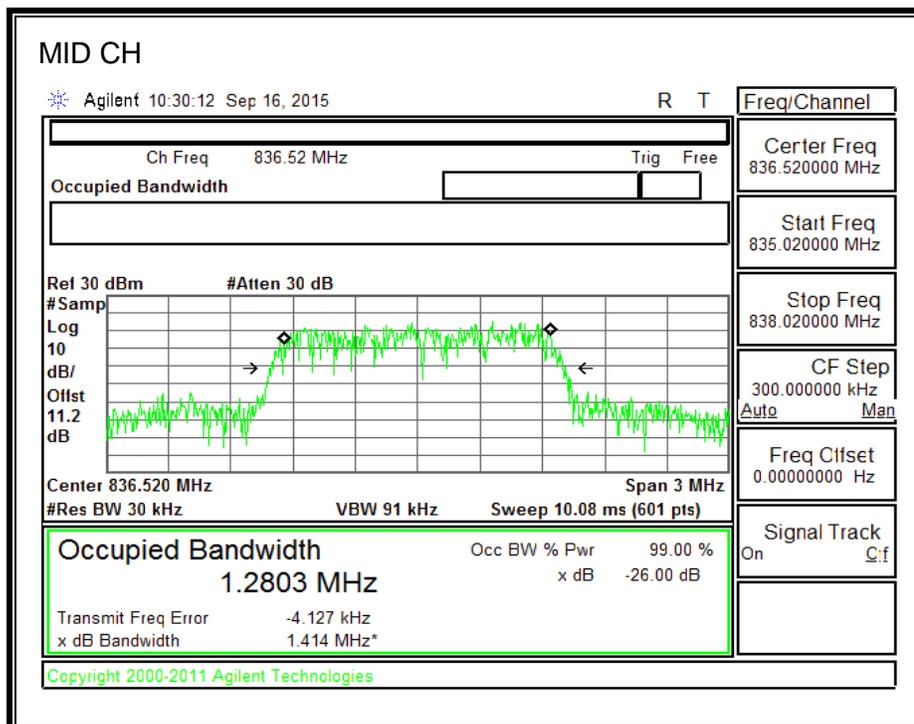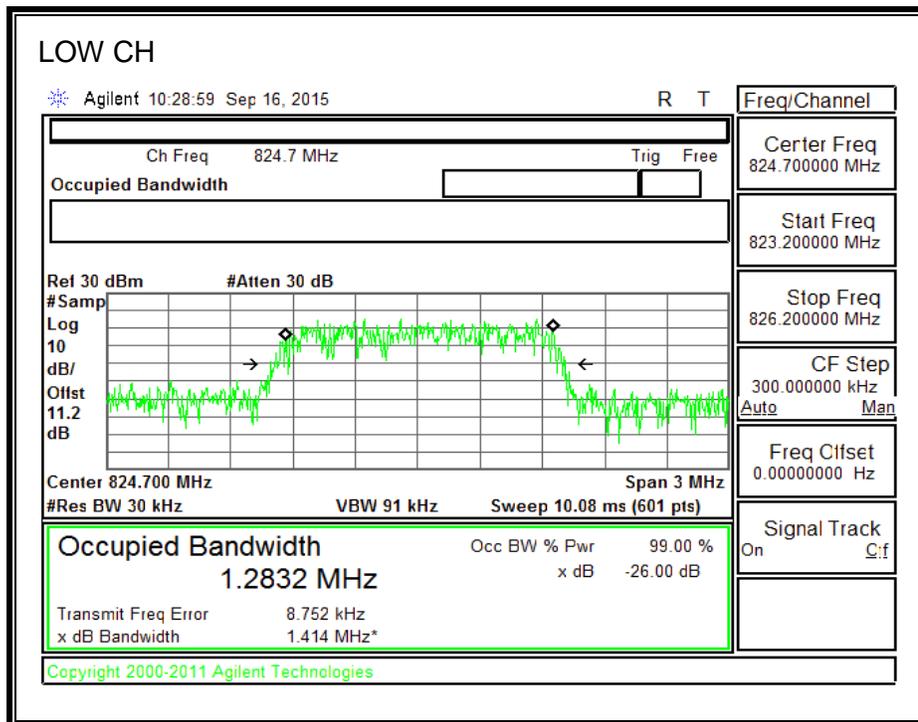


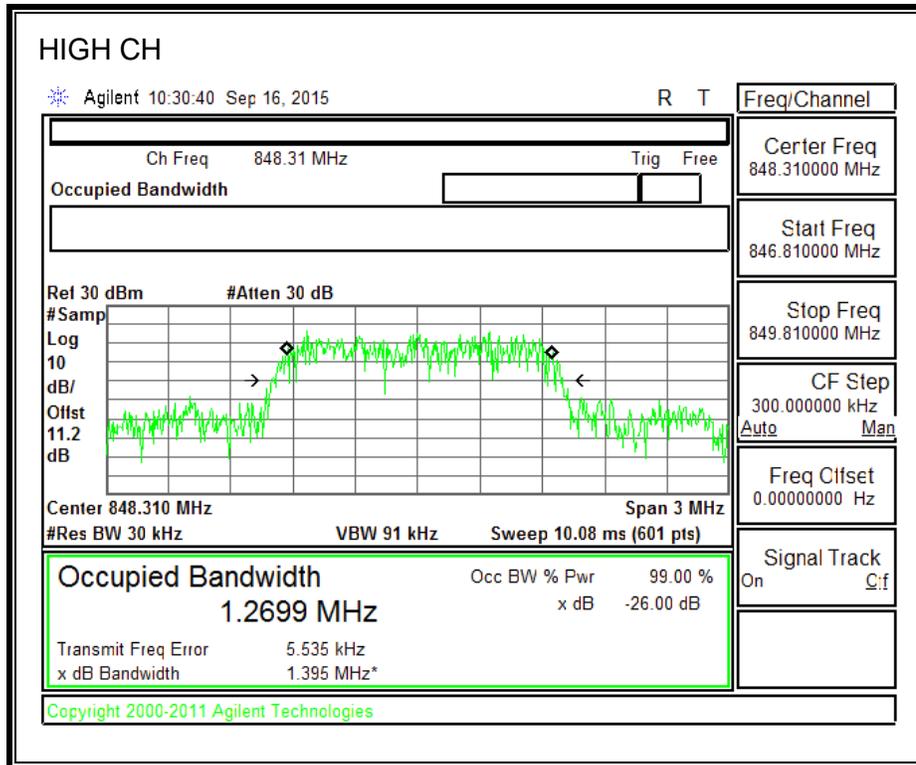


**1900MHz BAND**

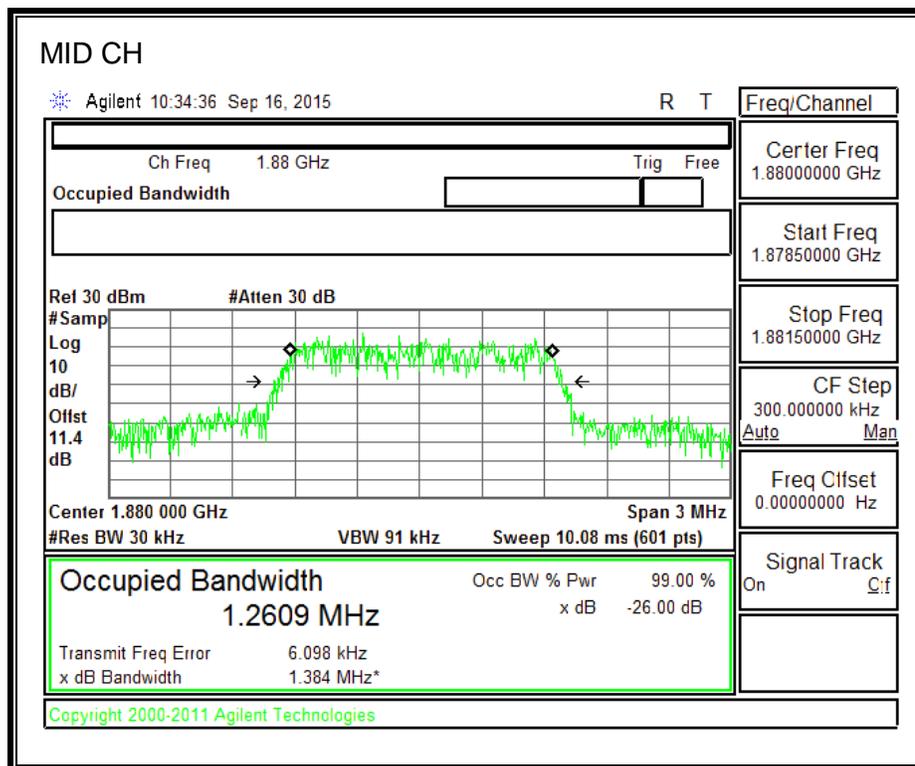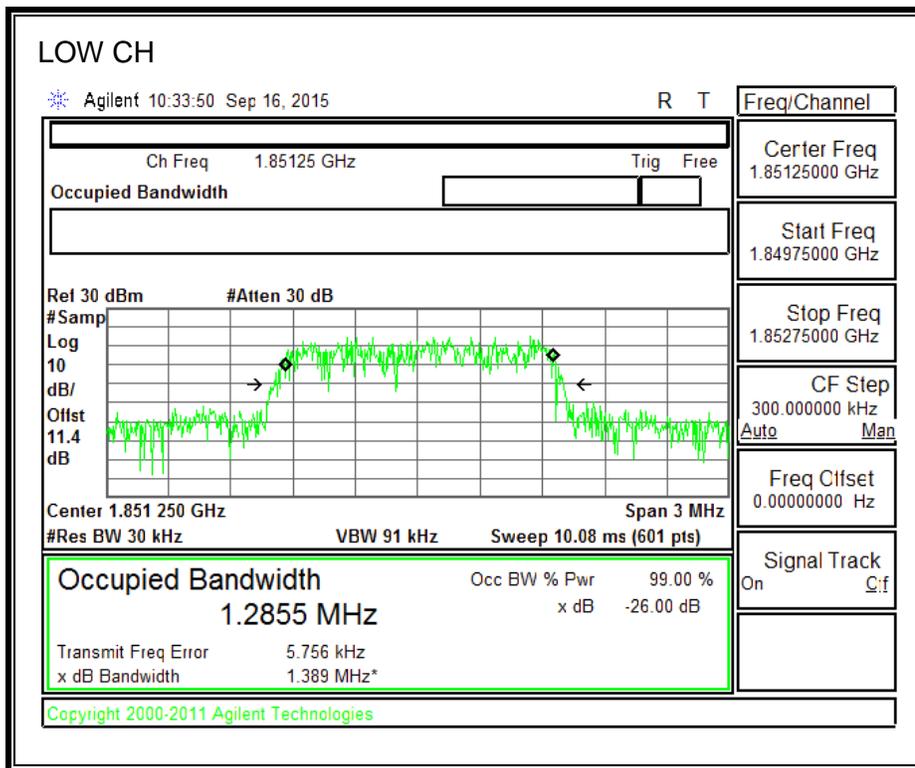


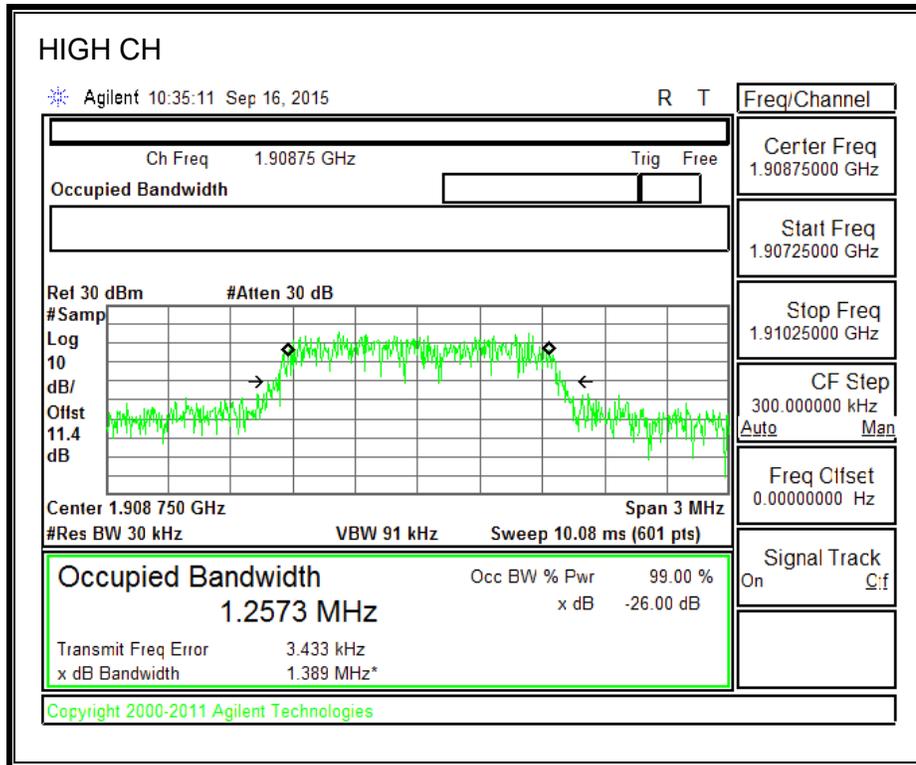



**1700MHz BAND**

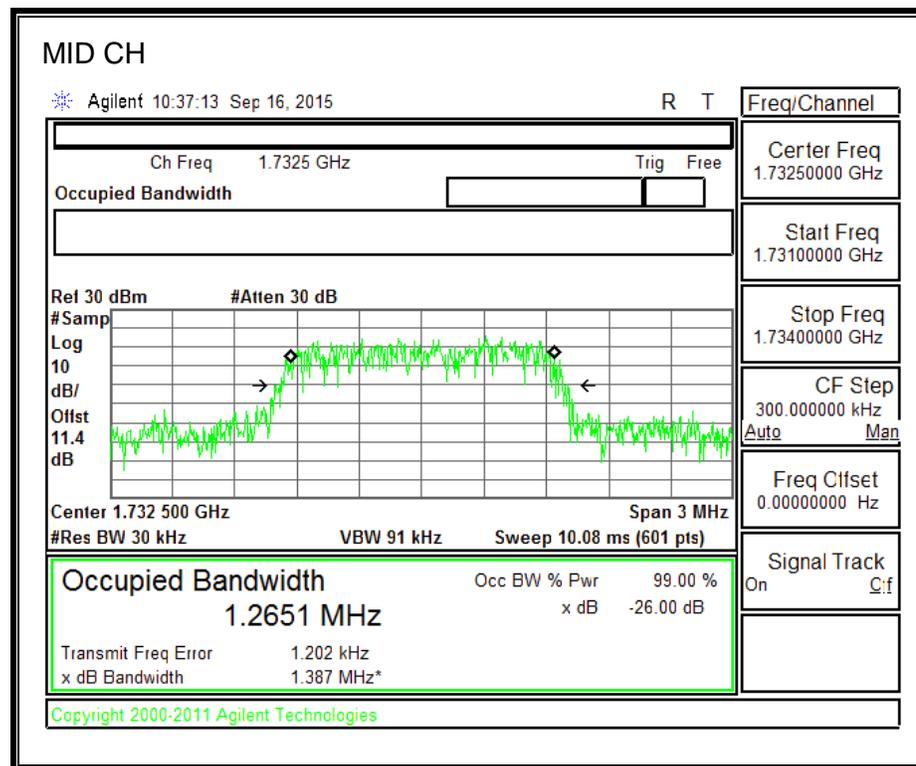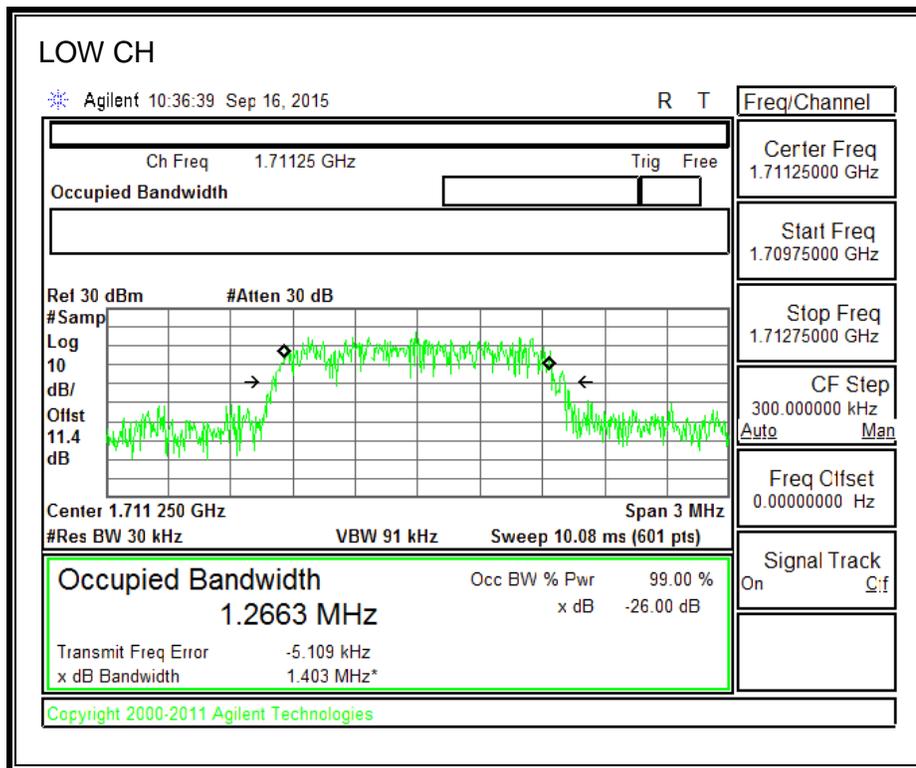





**800MHz SECONDARY BAND**

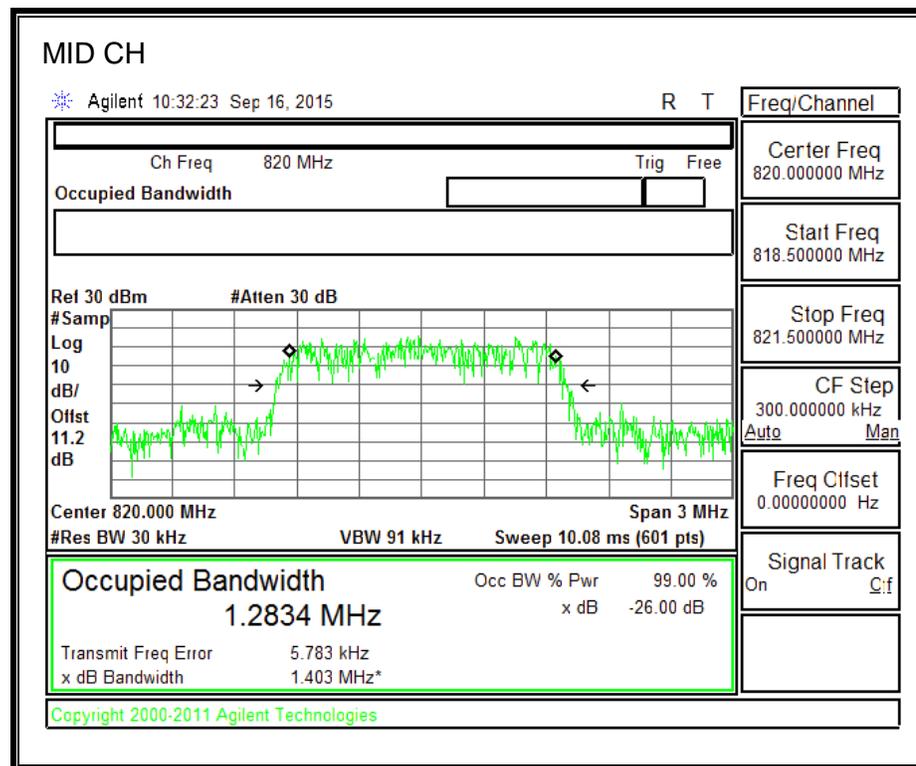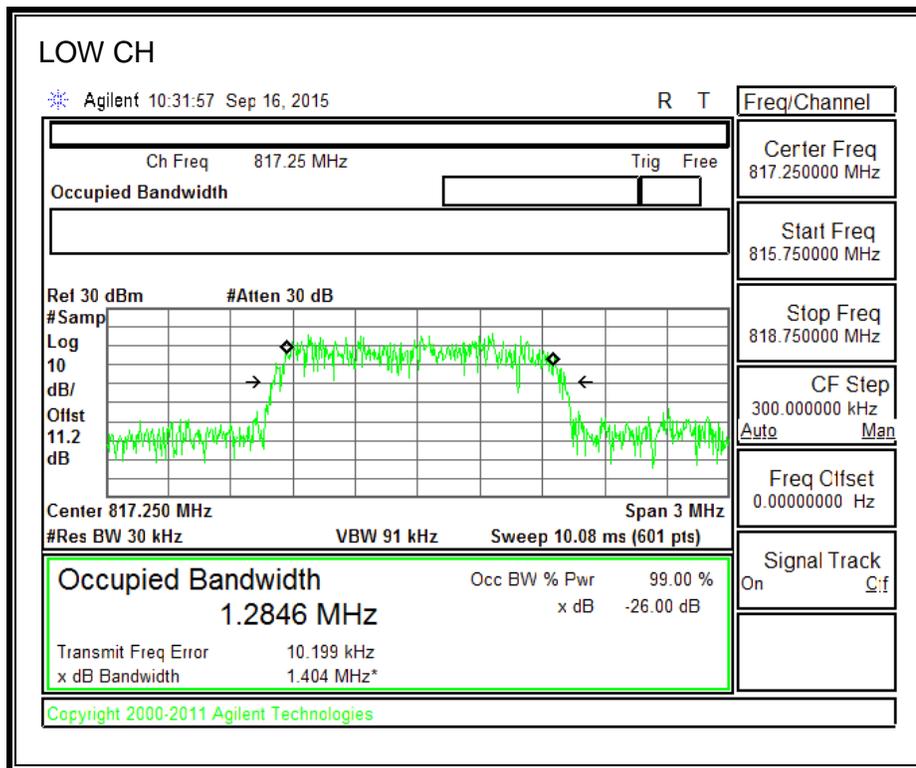


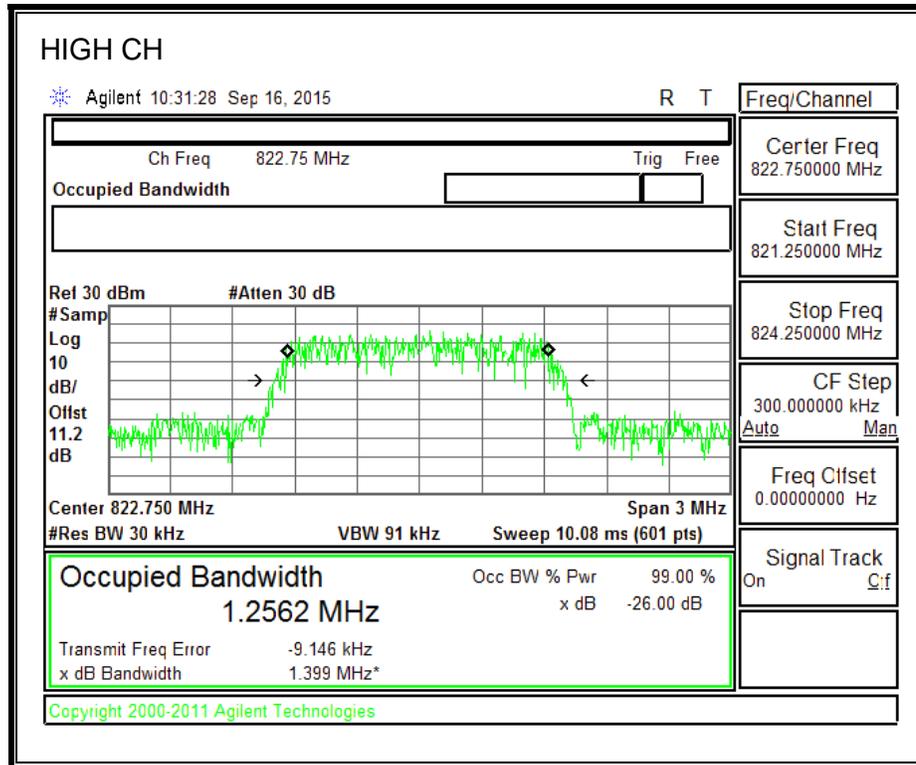



### 8.1.5. UMTS REL 99


#### 850MHz BAND

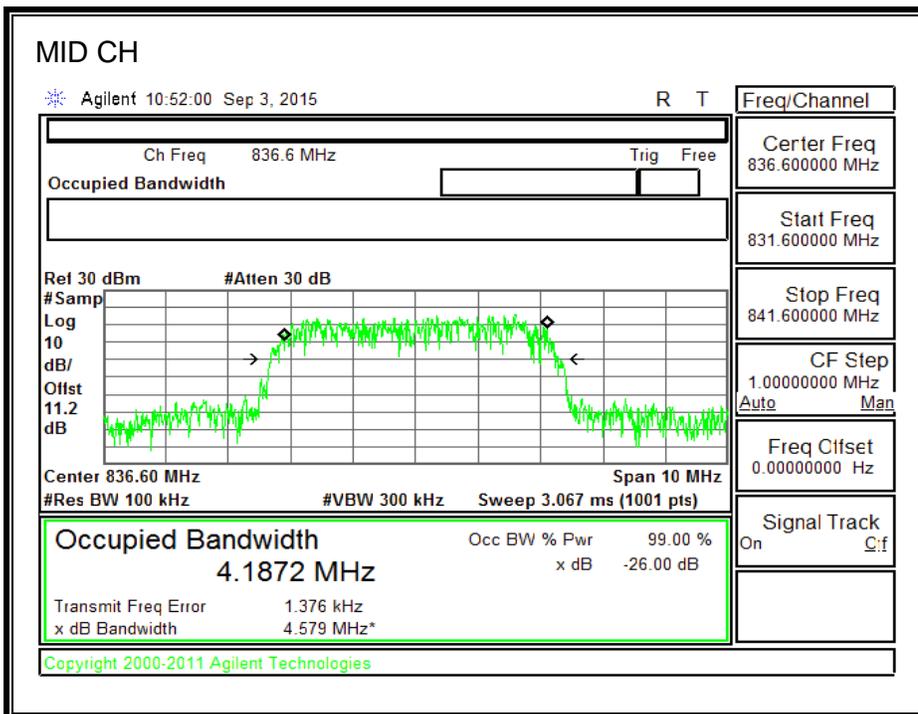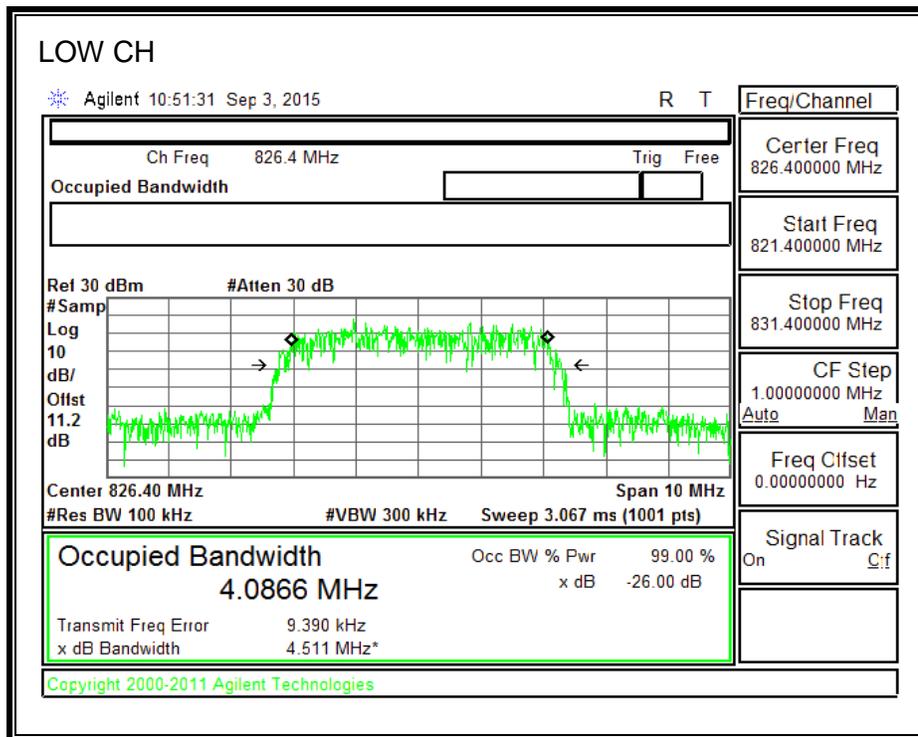


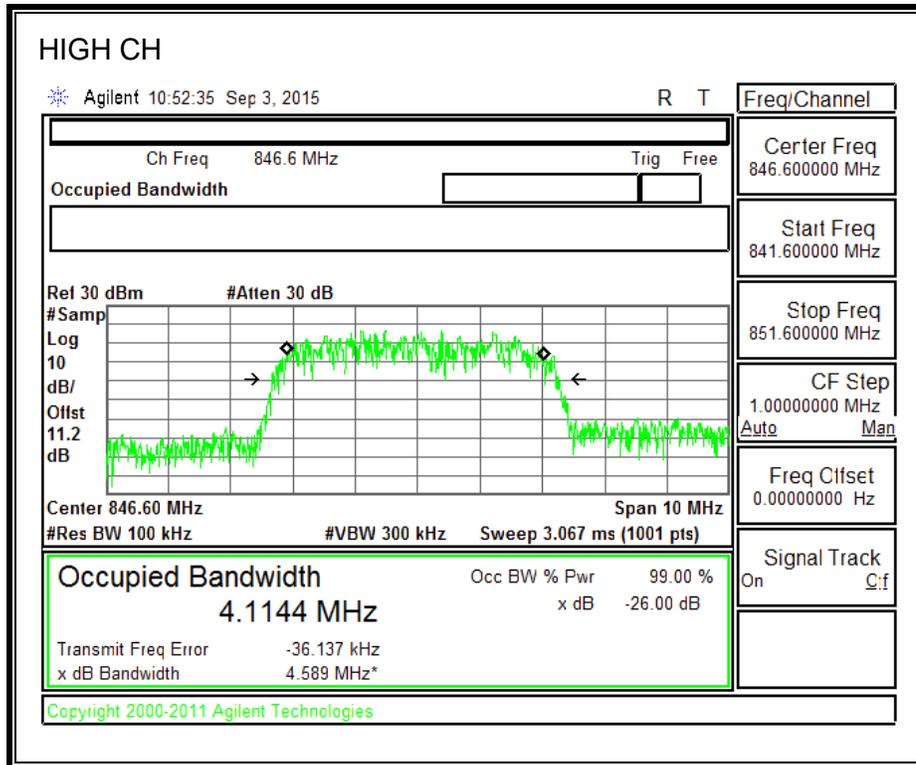



**1900MHz BAND**

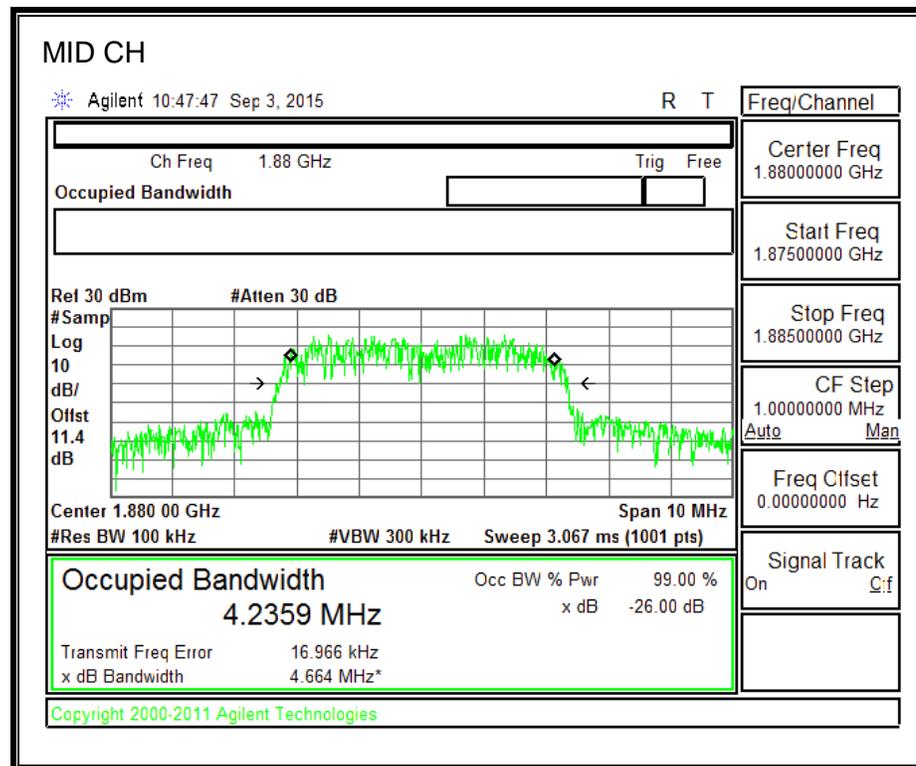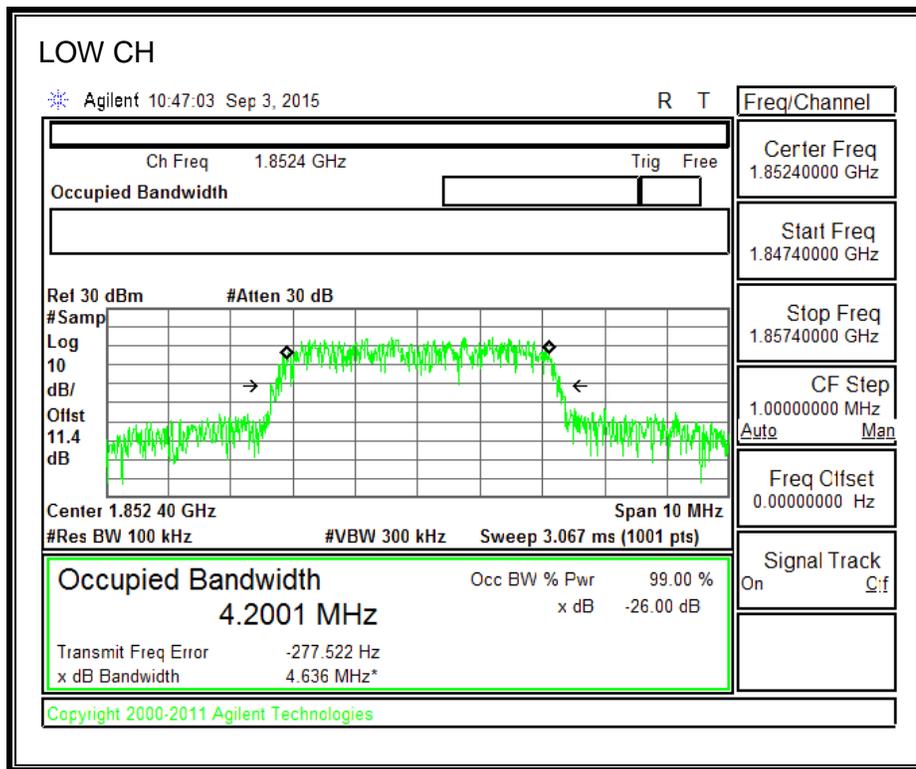

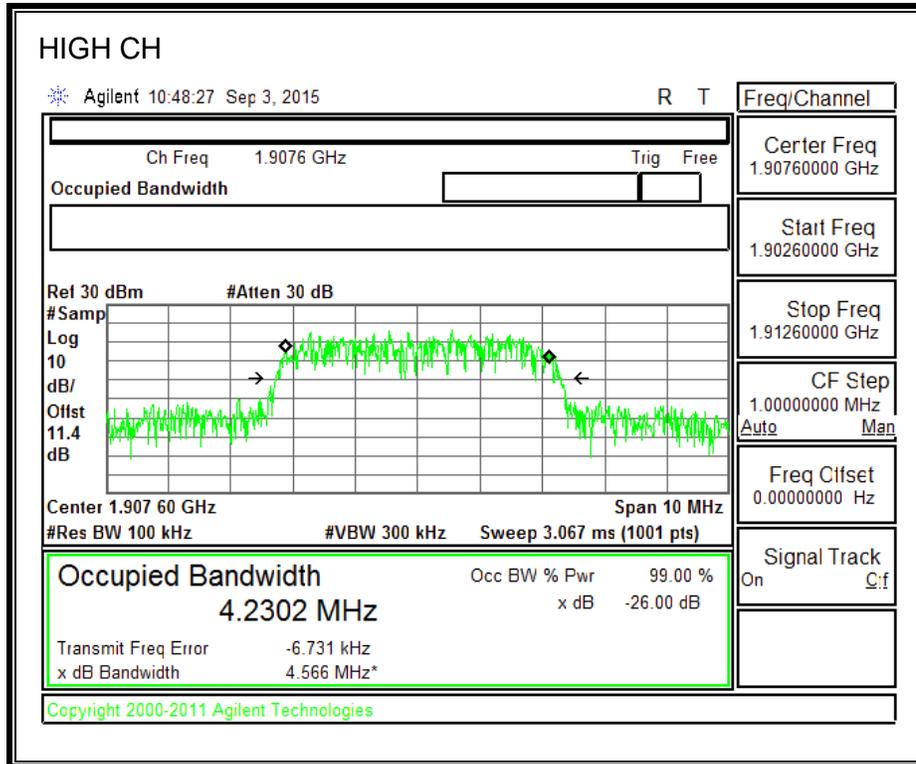



**1700MHz BAND**

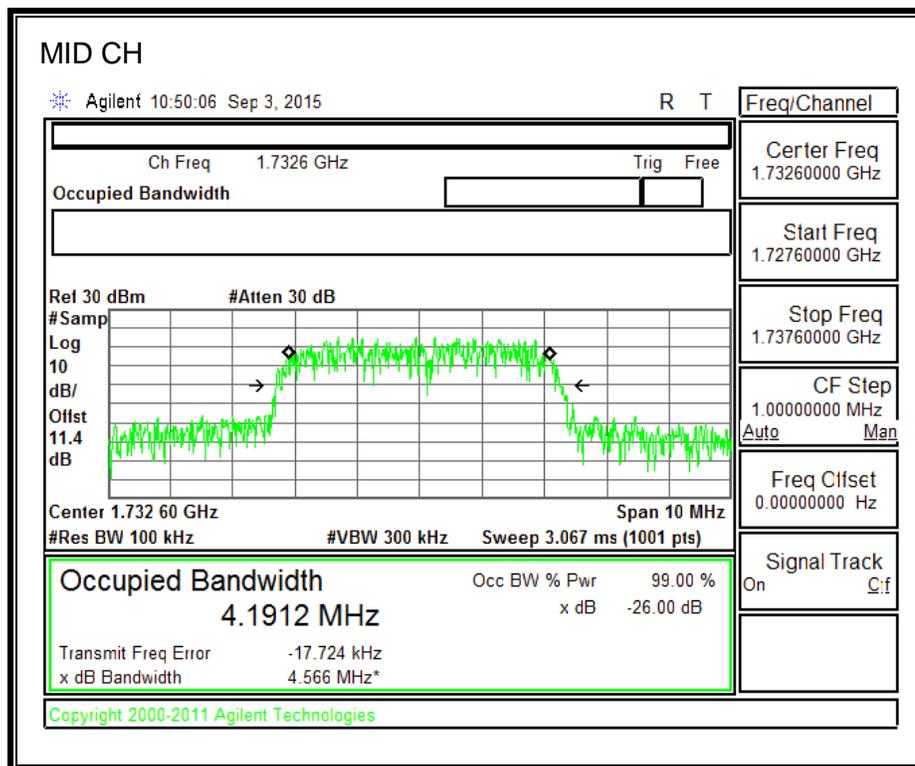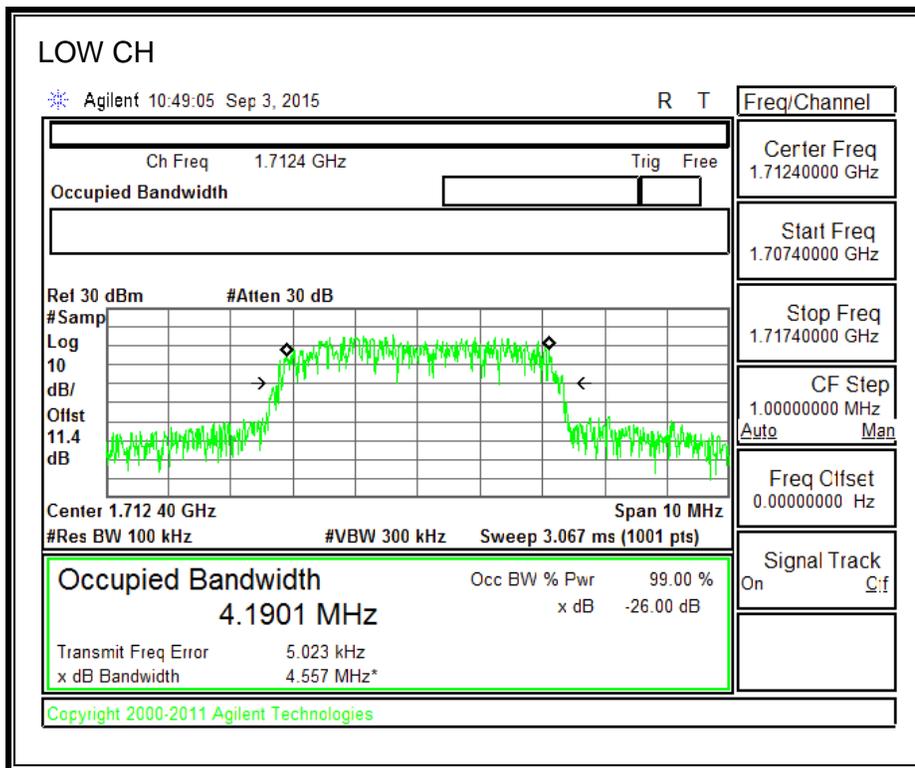


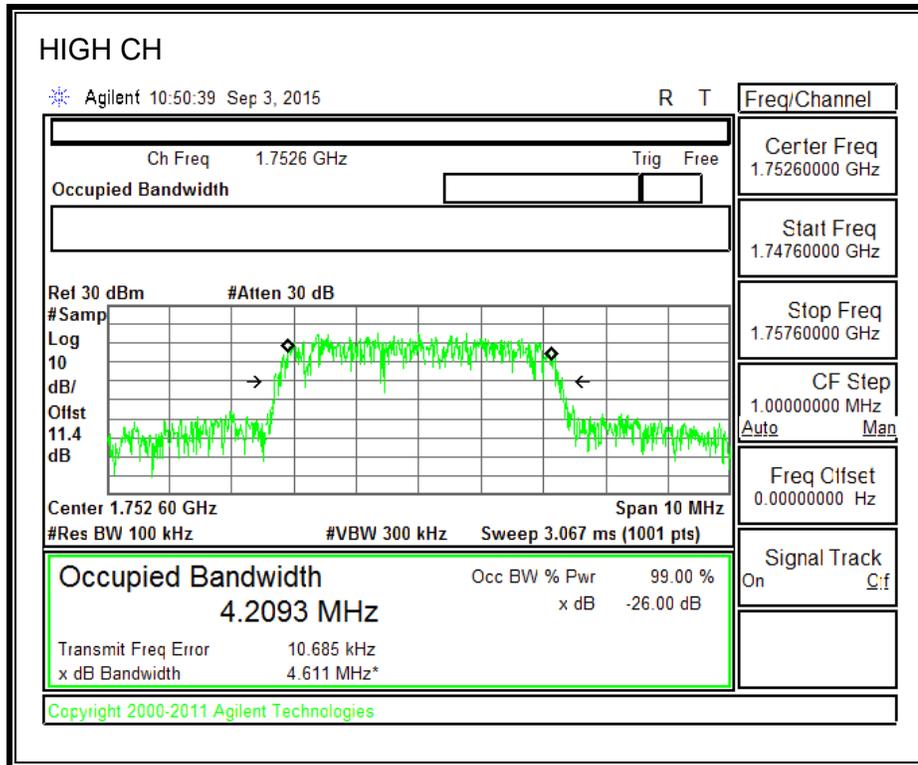



### 8.1.6. UMTS HSDPA


#### 850MHz BAND

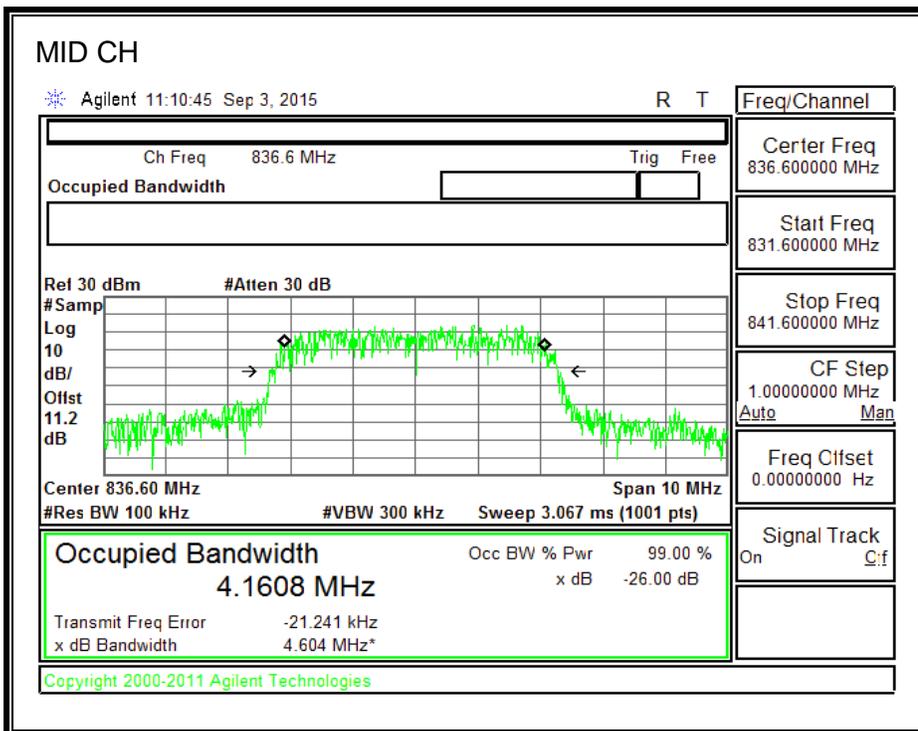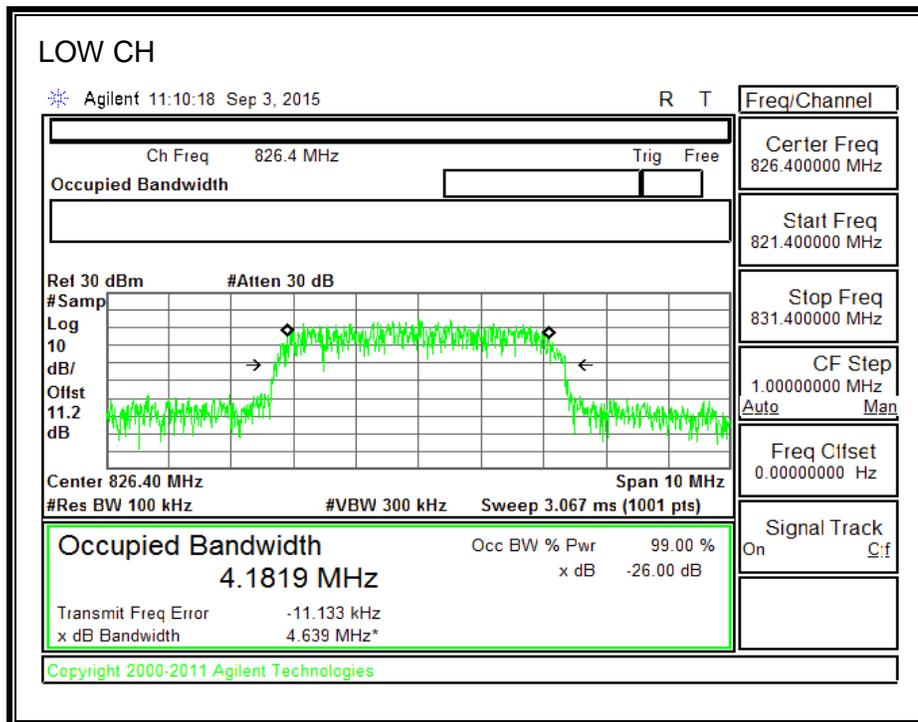


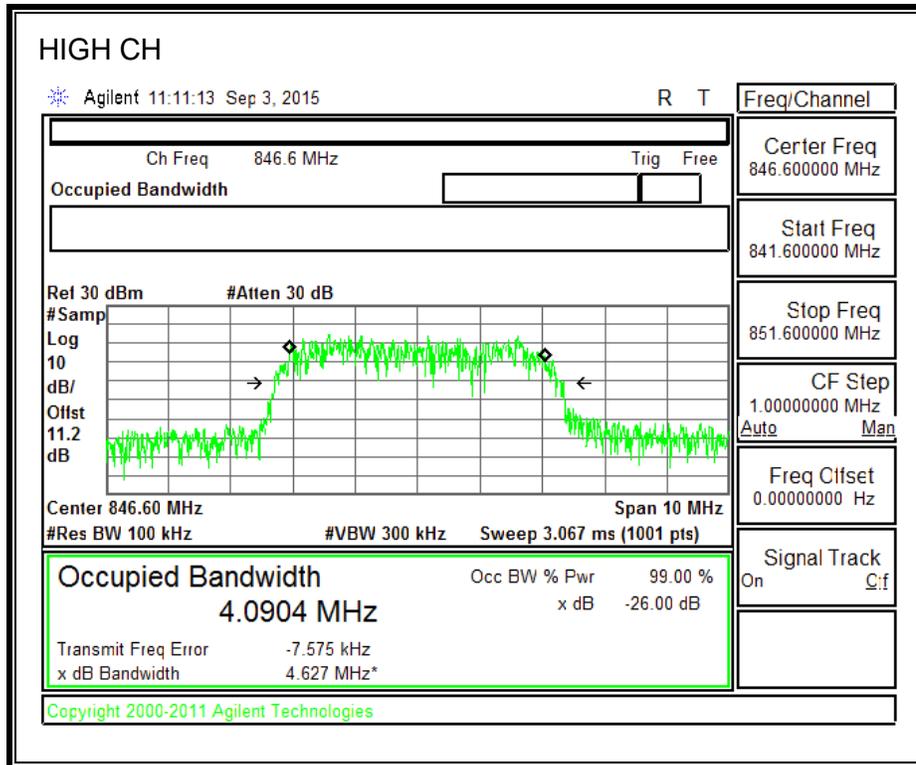



**1900MHz BAND**

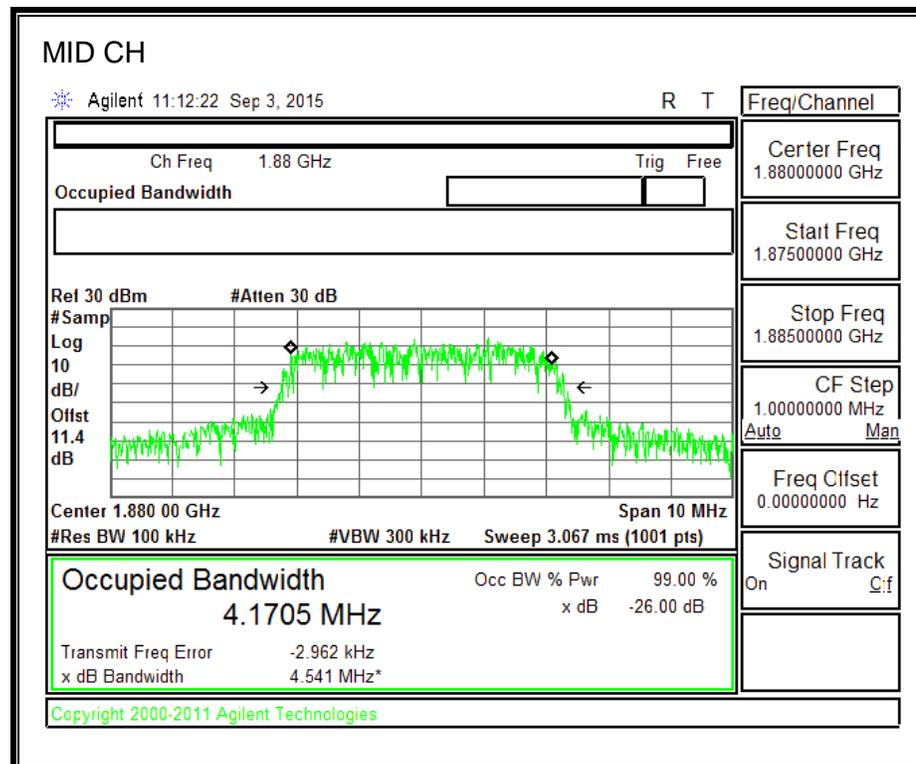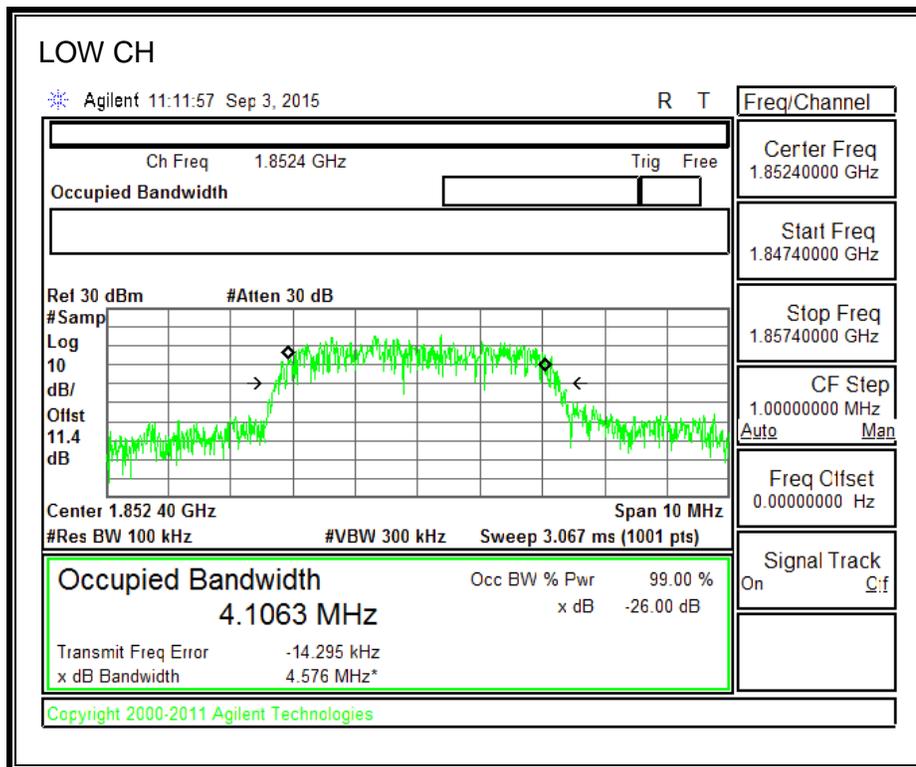

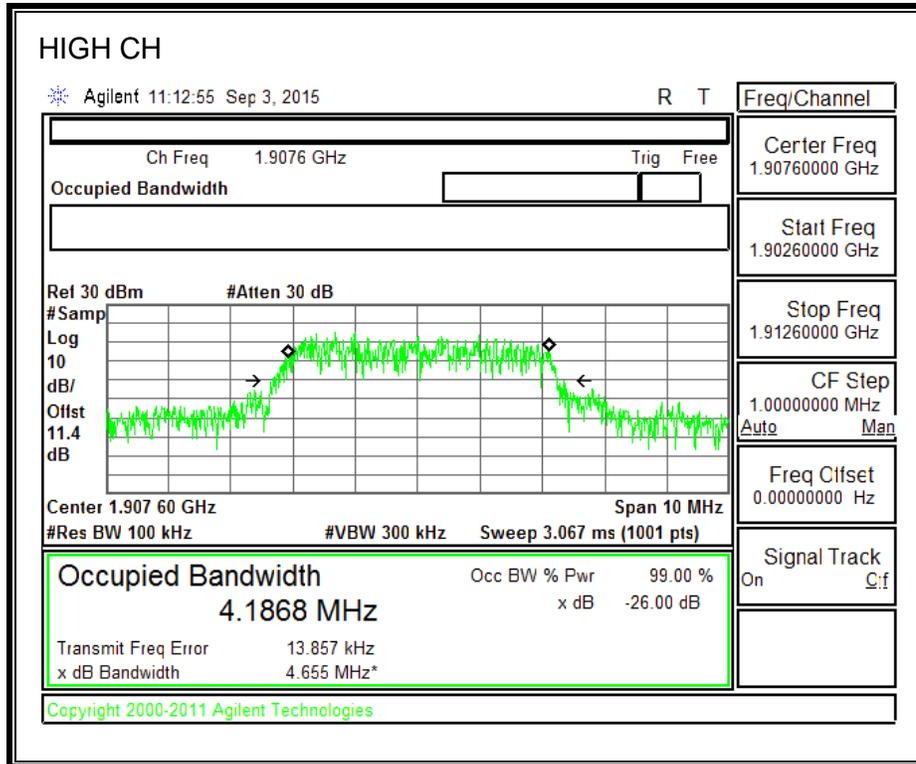

**1700MHz BAND**

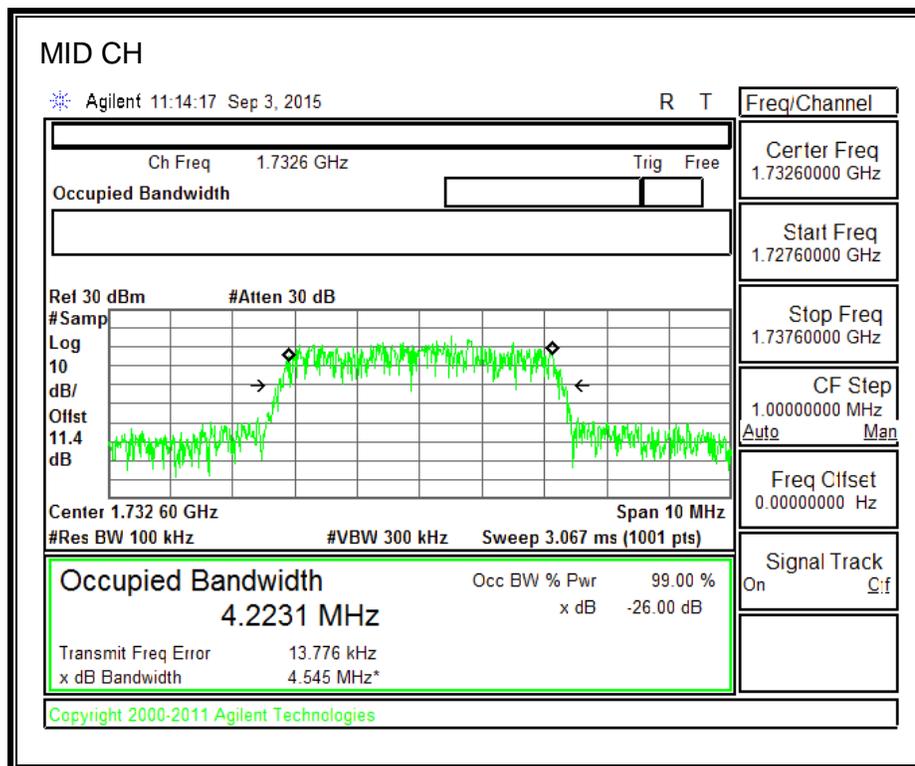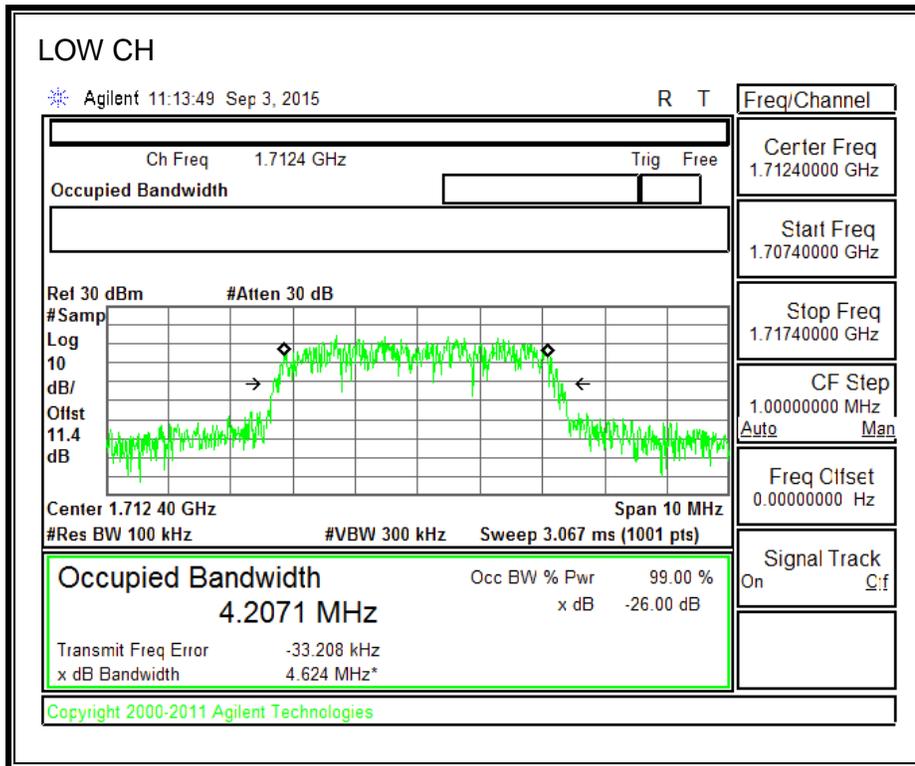

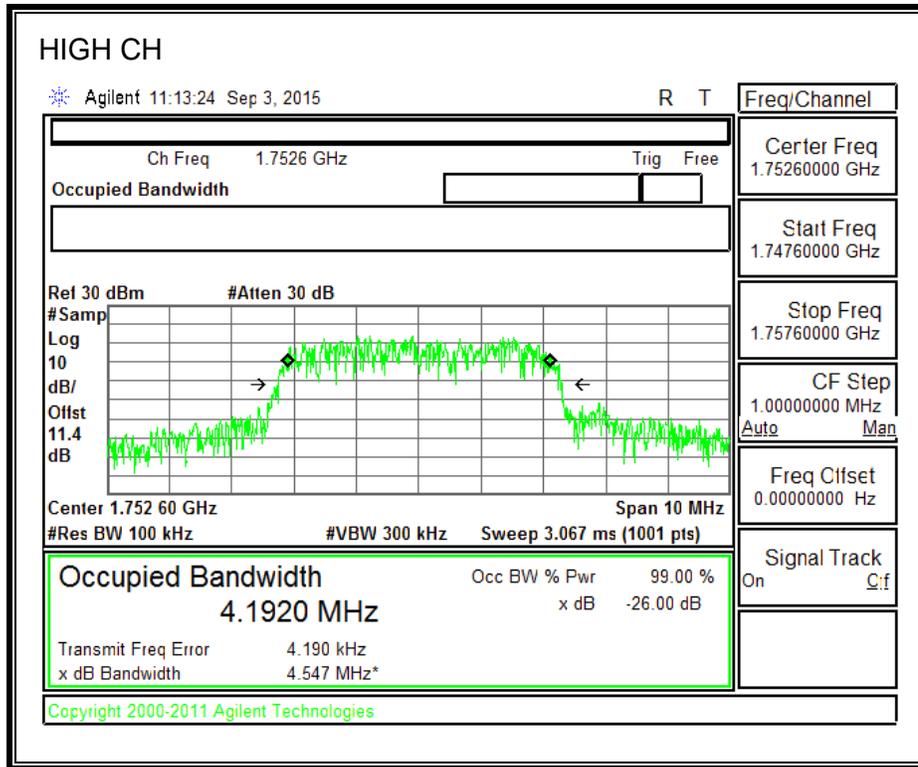

## **8.2. BAND EDGE**

### **RULE PART(S)**

FCC: §22.359, 24.238, §27.53 and §90.691

### **LIMITS**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

Compliance with the provisions of paragraphs above of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

### **TEST PROCEDURE**

The transmitter output was connected to a Agilent 8960 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.



For each band edge measurement:

- Set the spectrum analyzer span to include the block edge frequency (824, 849, 1850, 1910MHz)
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.



### **RESULTS**

### 8.2.1. GSM-GPRS

#### 850MHz BAND

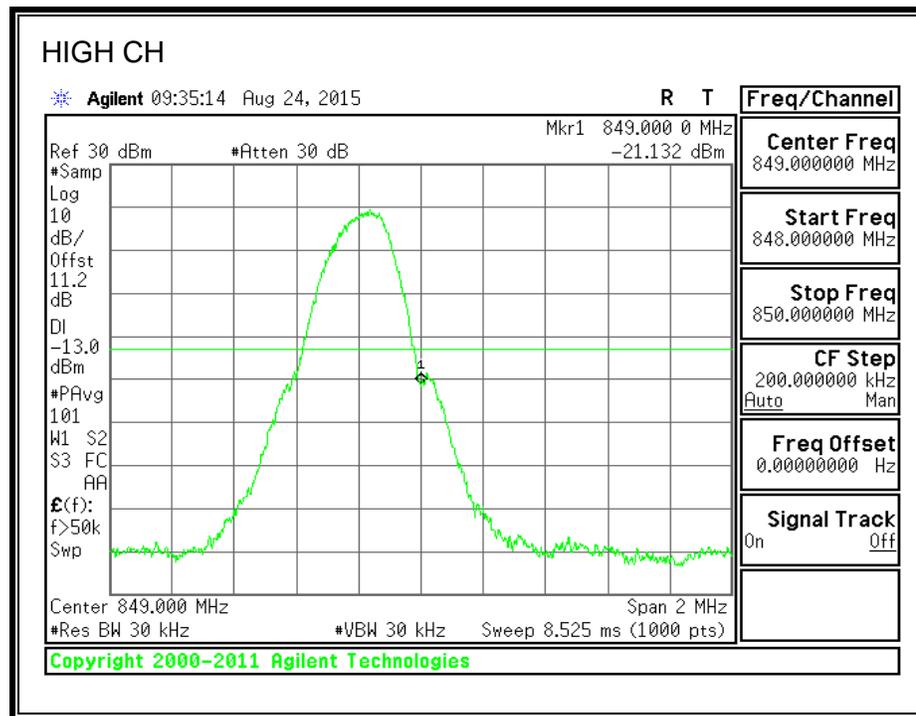
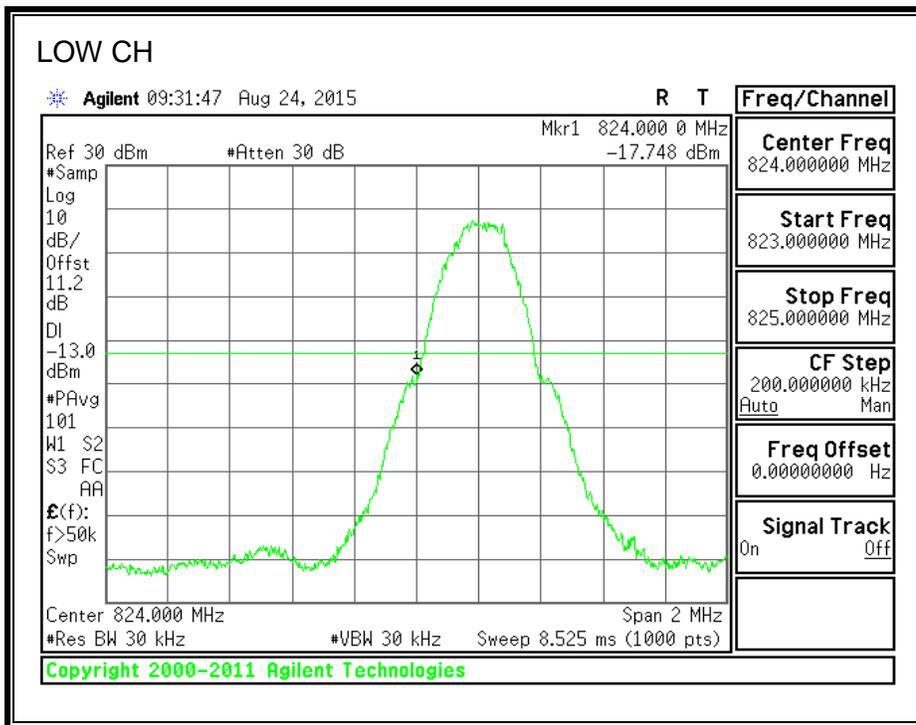


**1900MHz BAND**

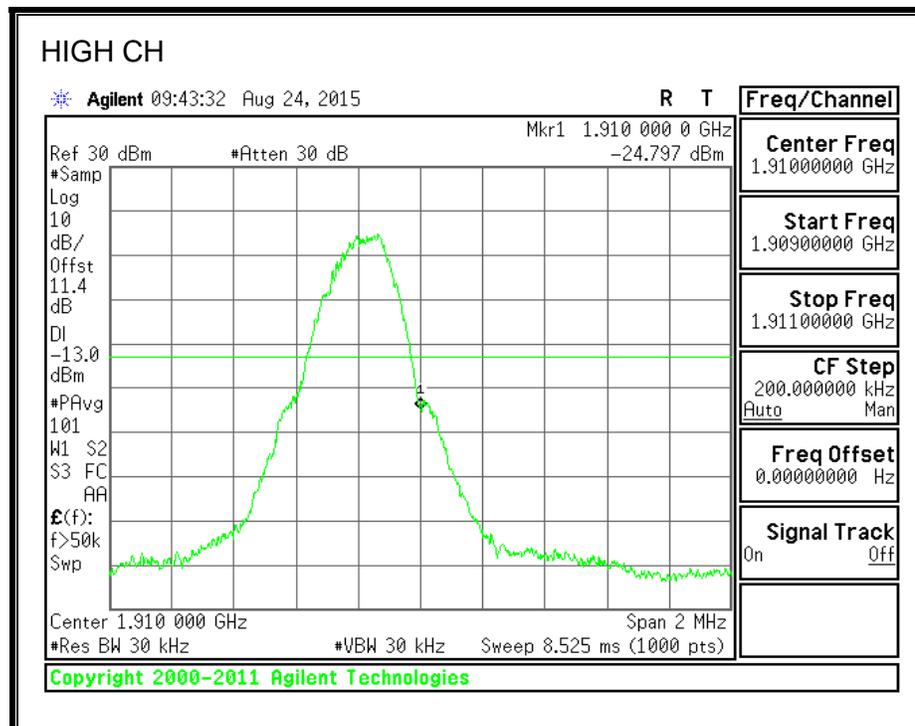
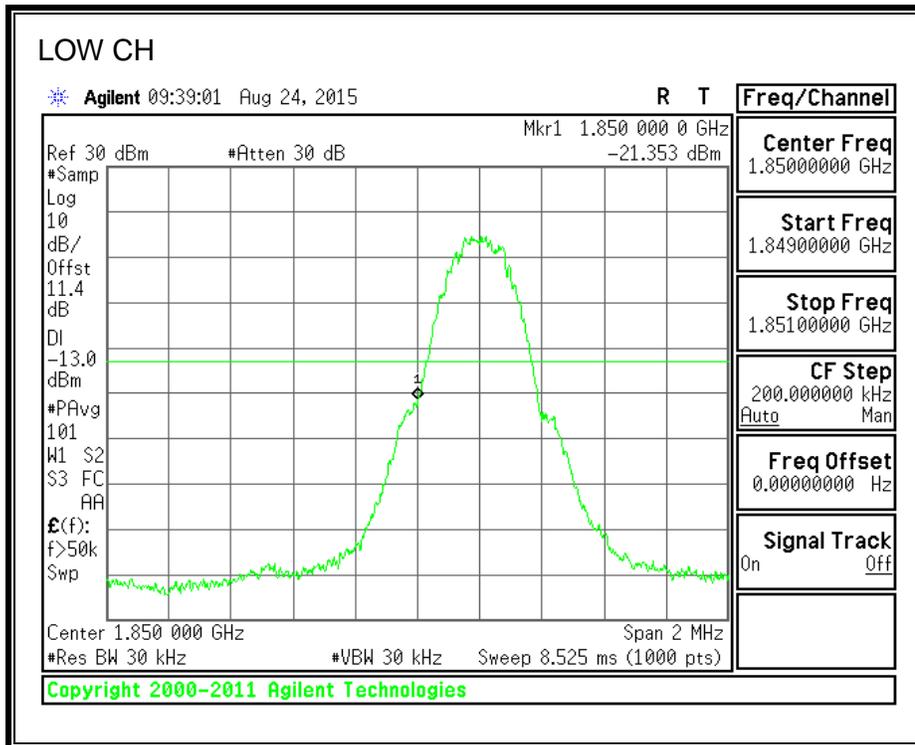


### 8.2.2. GSM-EGPRS

#### 850MHz BAND

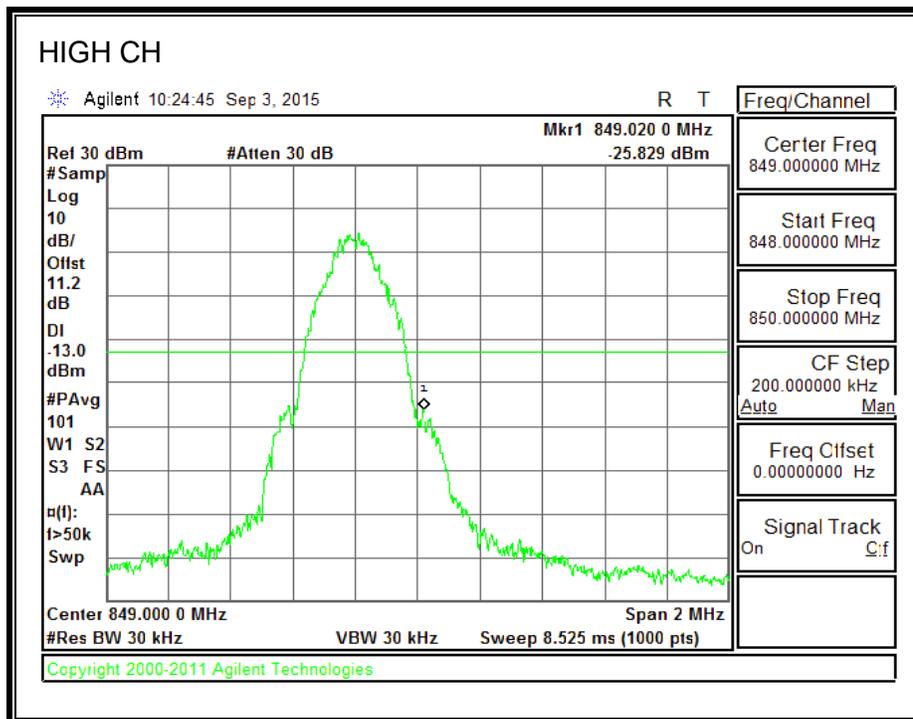
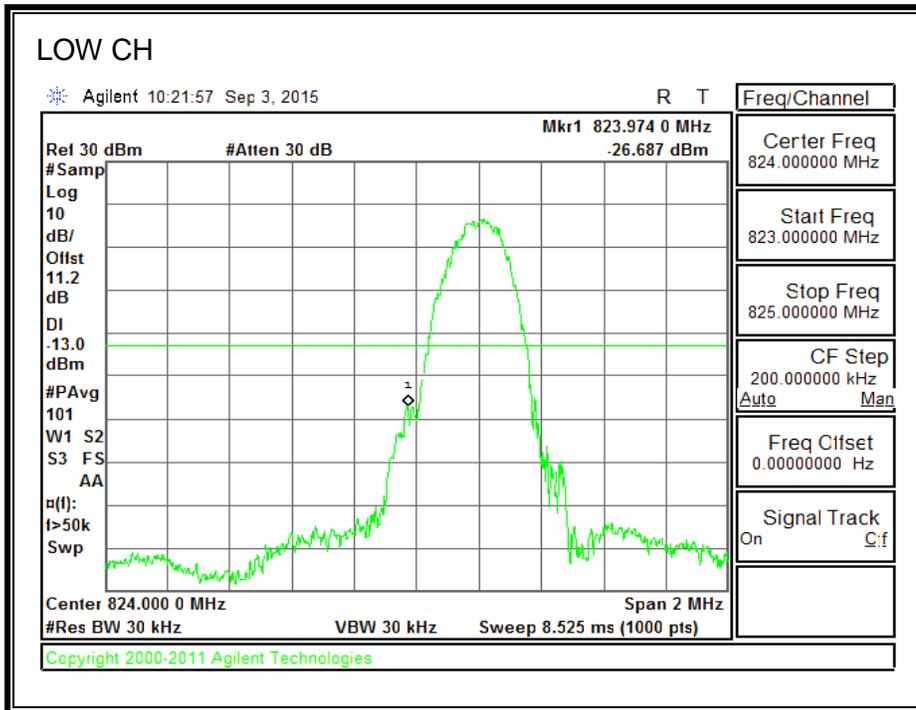


**1900MHz BAND**

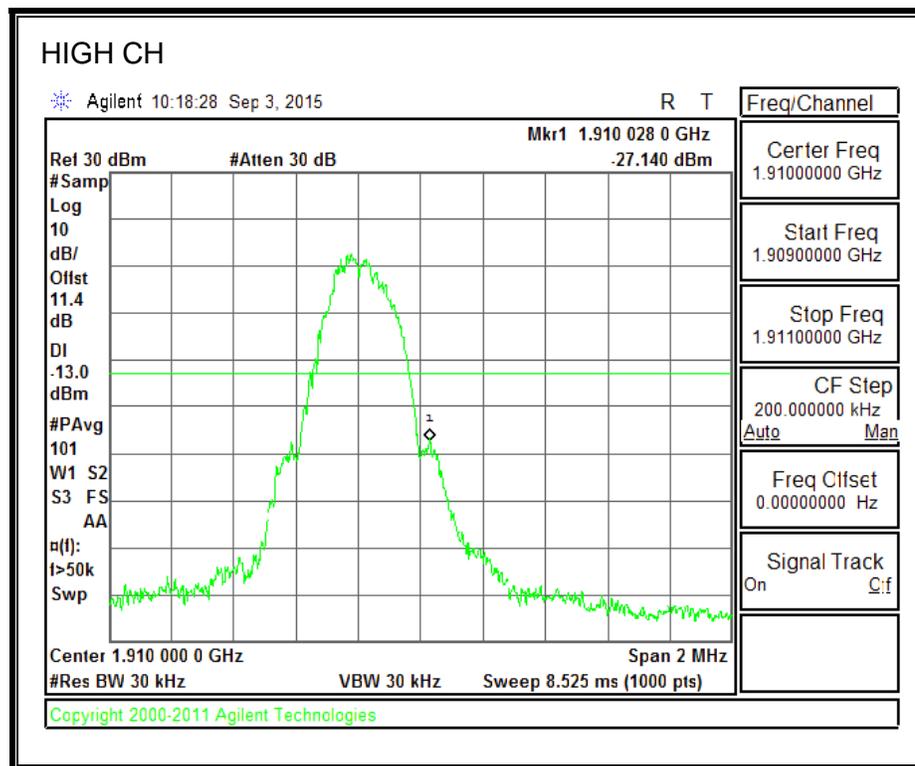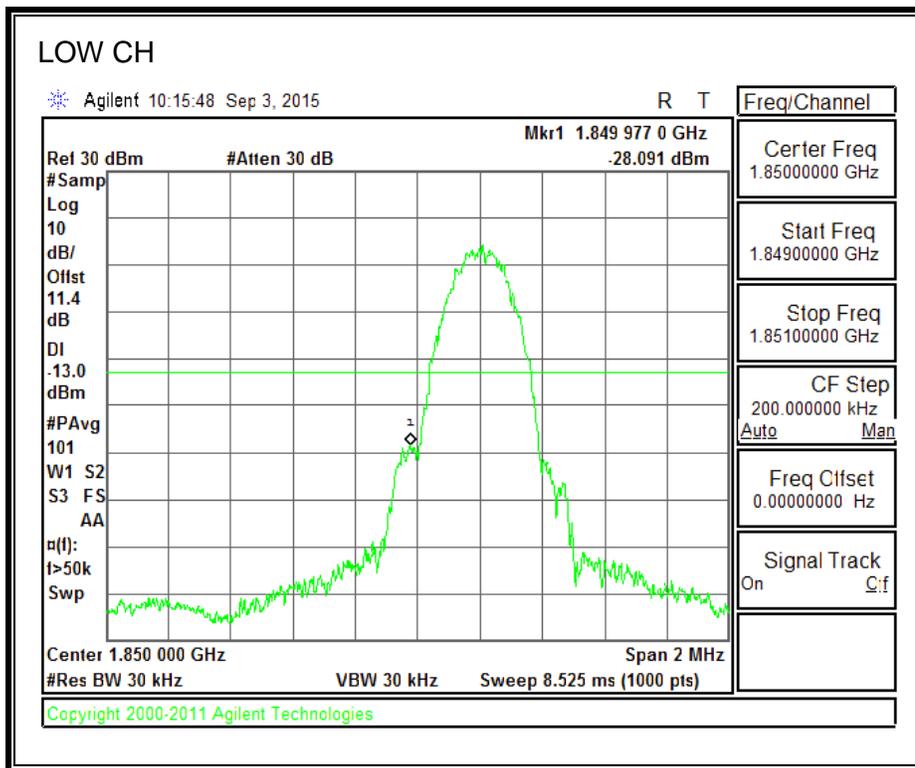



### 8.2.3. CDMA2000 1xRTT

#### 850MHz BAND

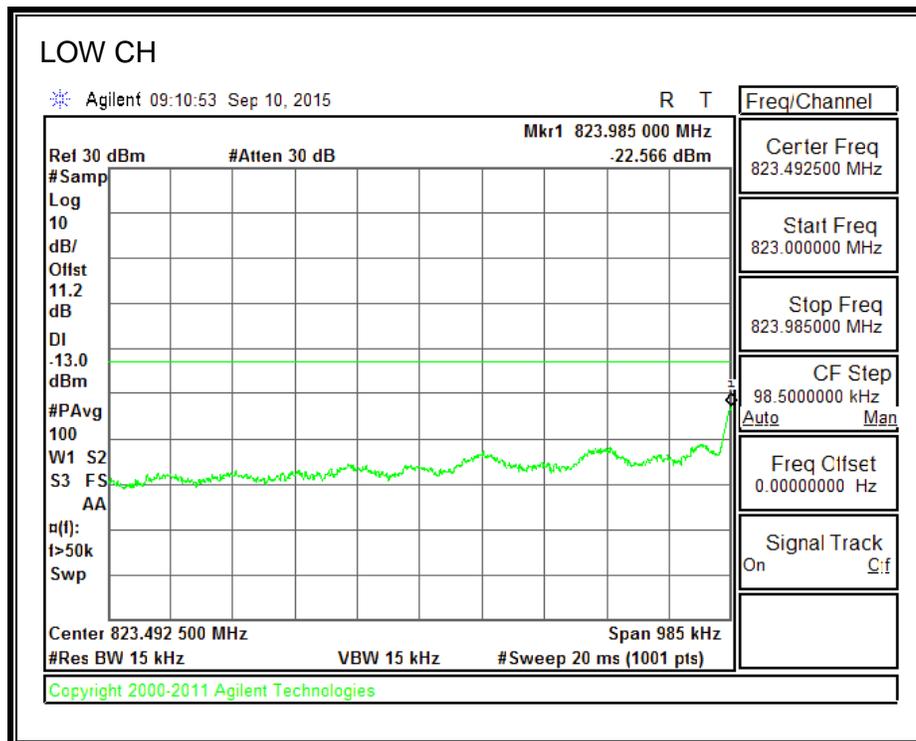
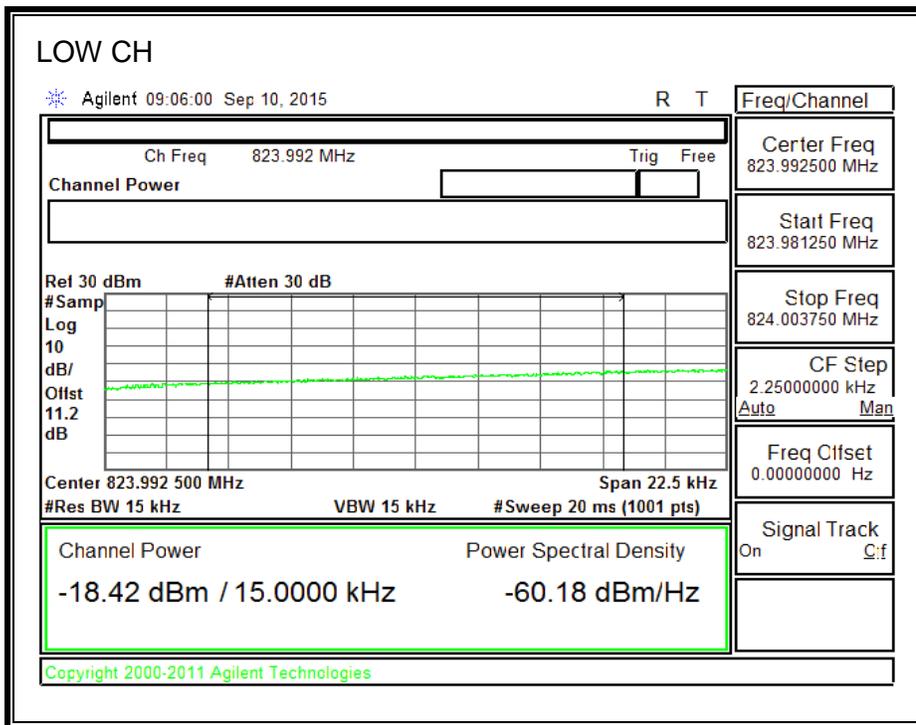





**1900MHz BAND**

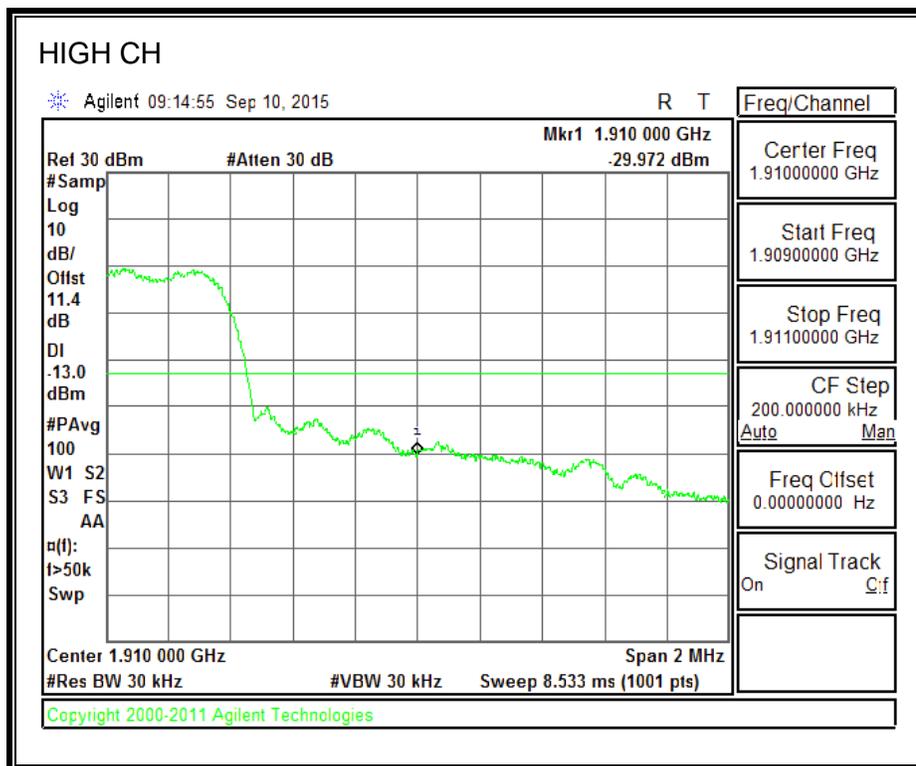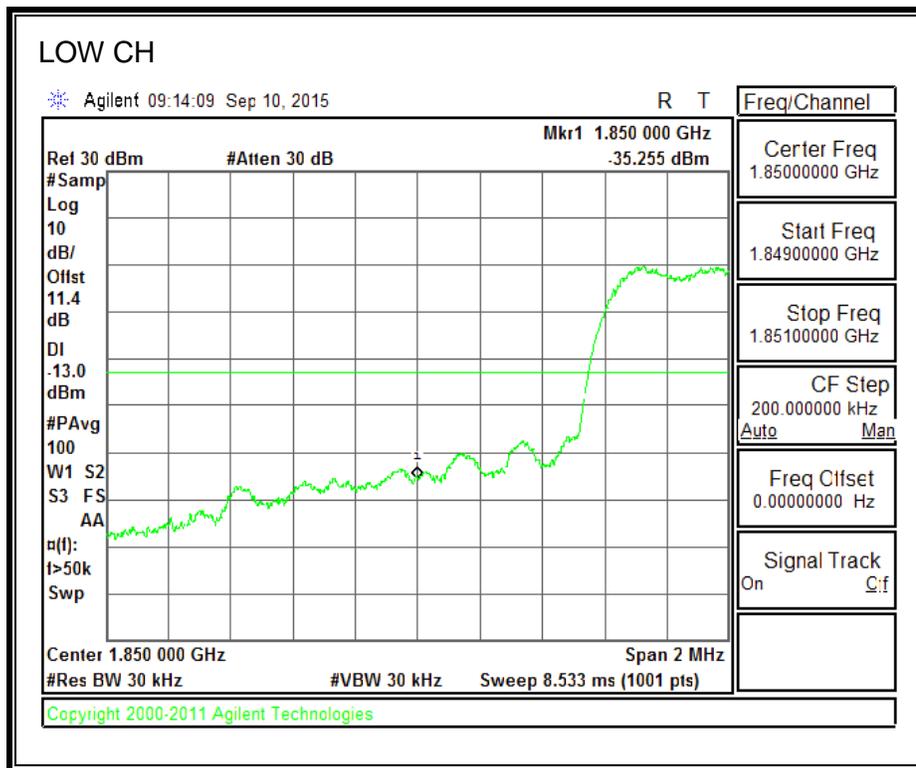


**1700MHz BAND**

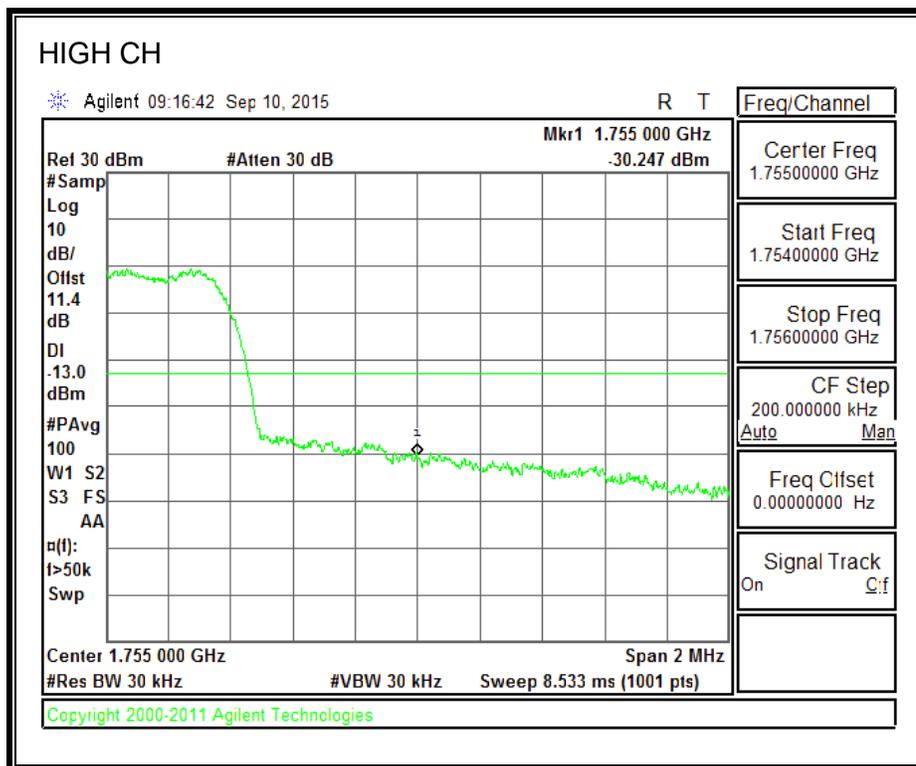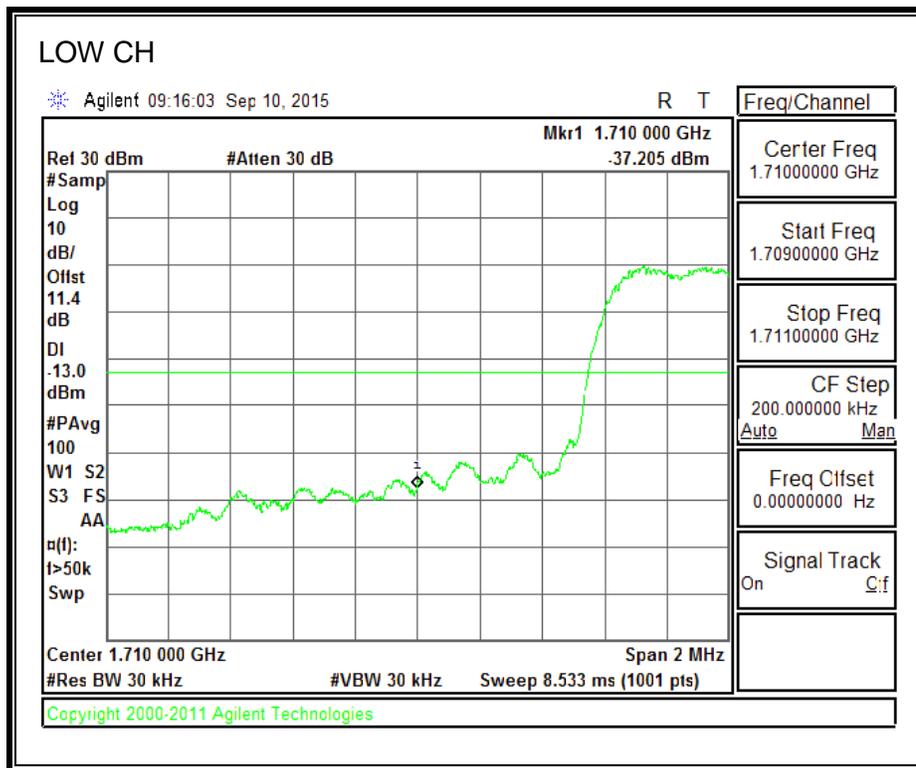


### 8.2.4. CDMA2000 1xRTT BC10 MASK

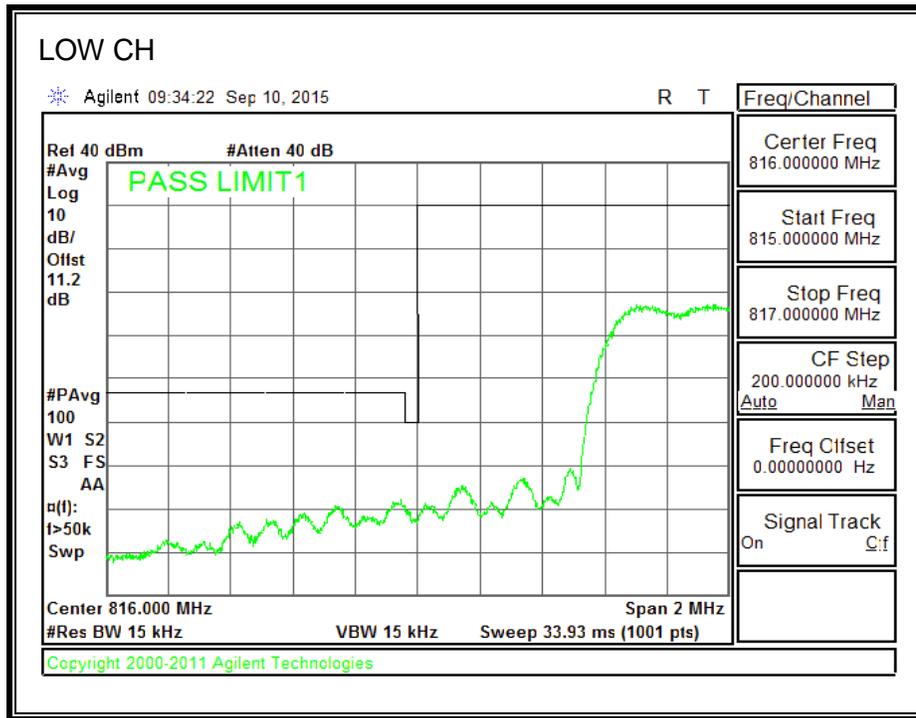


Note: RBW=1% of EBW

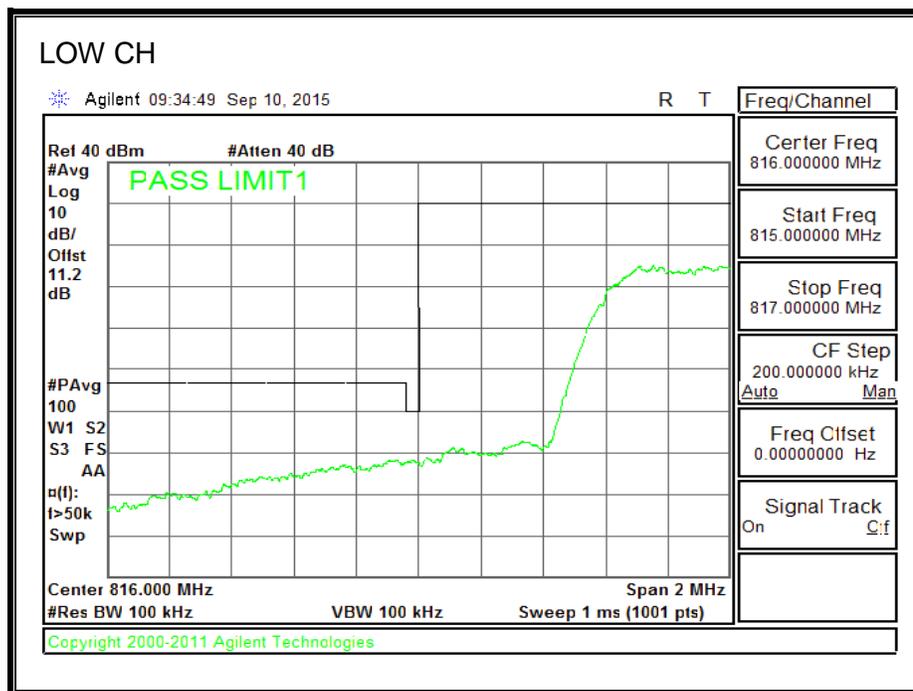

Note: RBW of 1% of 37.5KHz of outer channel frequency block

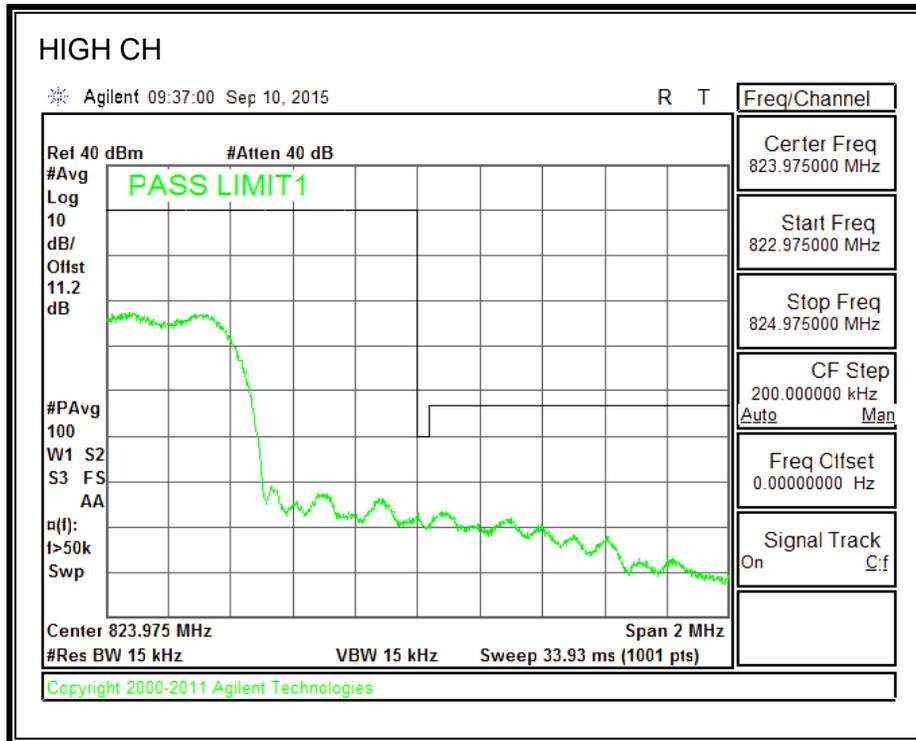



Note: RBW=1% of EBW

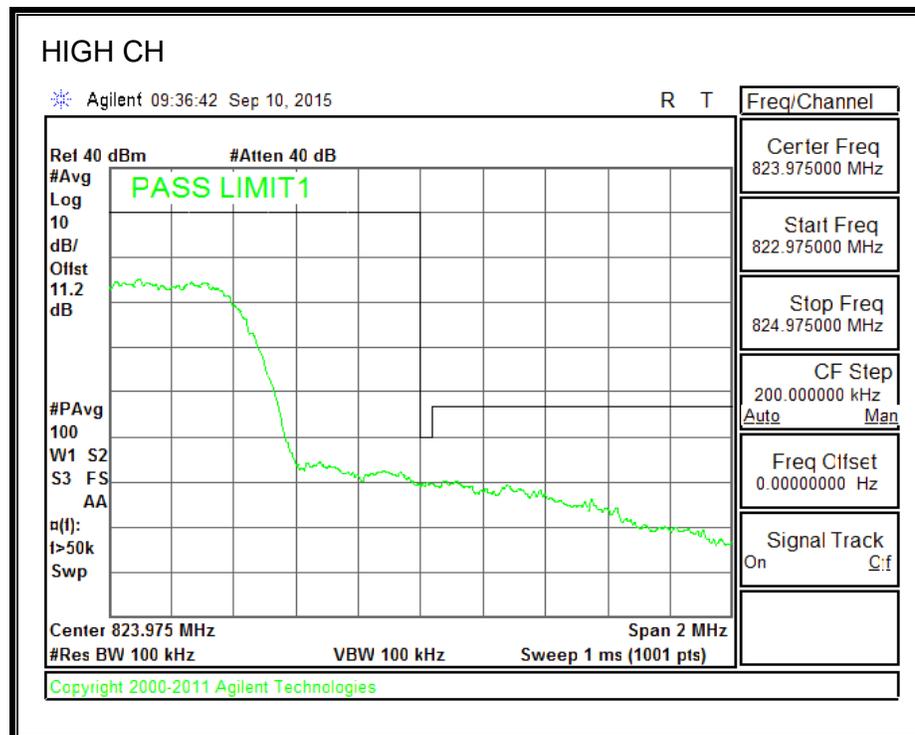



Note: RBW of 1% of 37.5KHz of outer channel frequency block

### 8.2.5. CDMA2000 EVDO REV A



#### 850MHz BAND

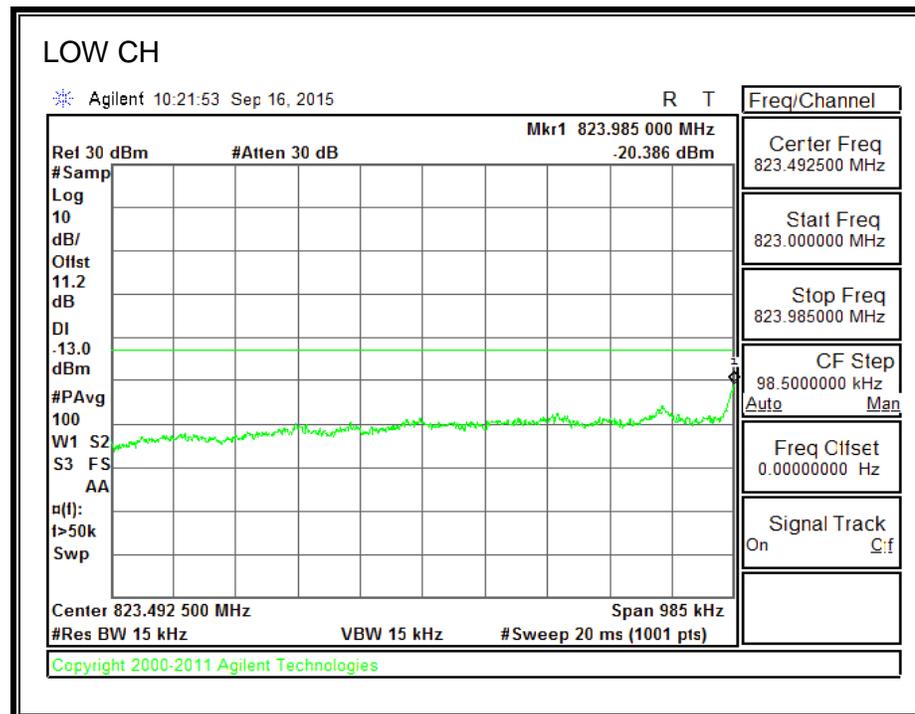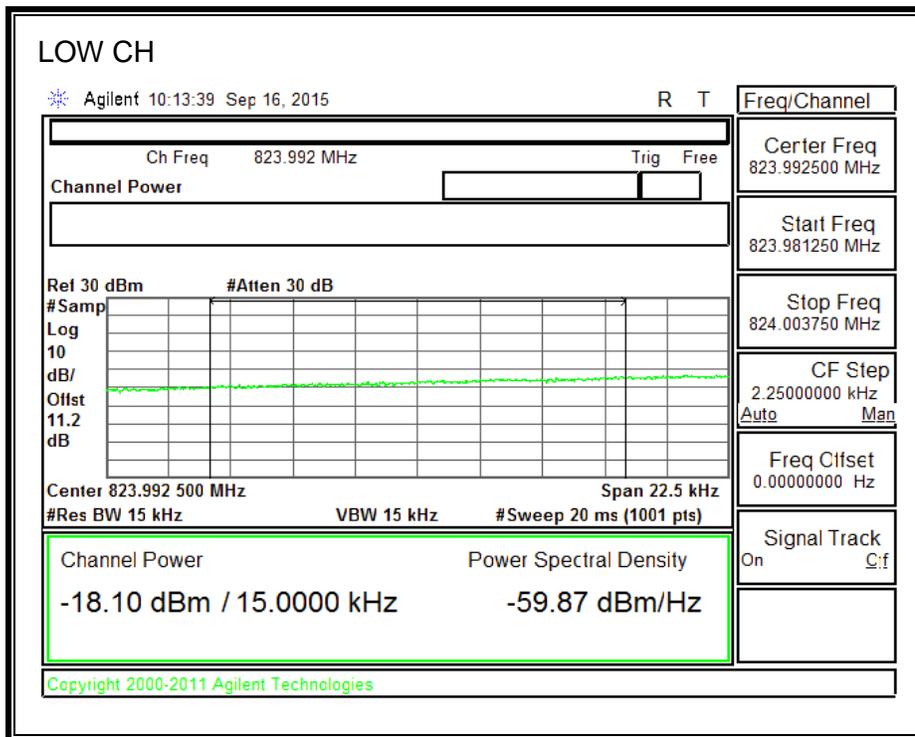



**850MHz BAND**

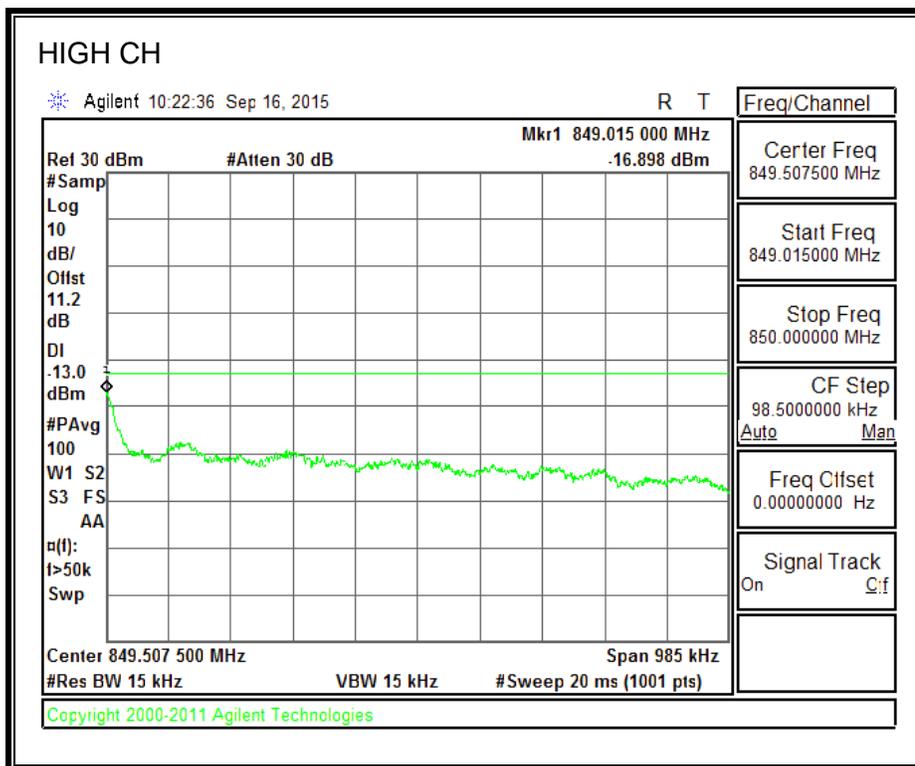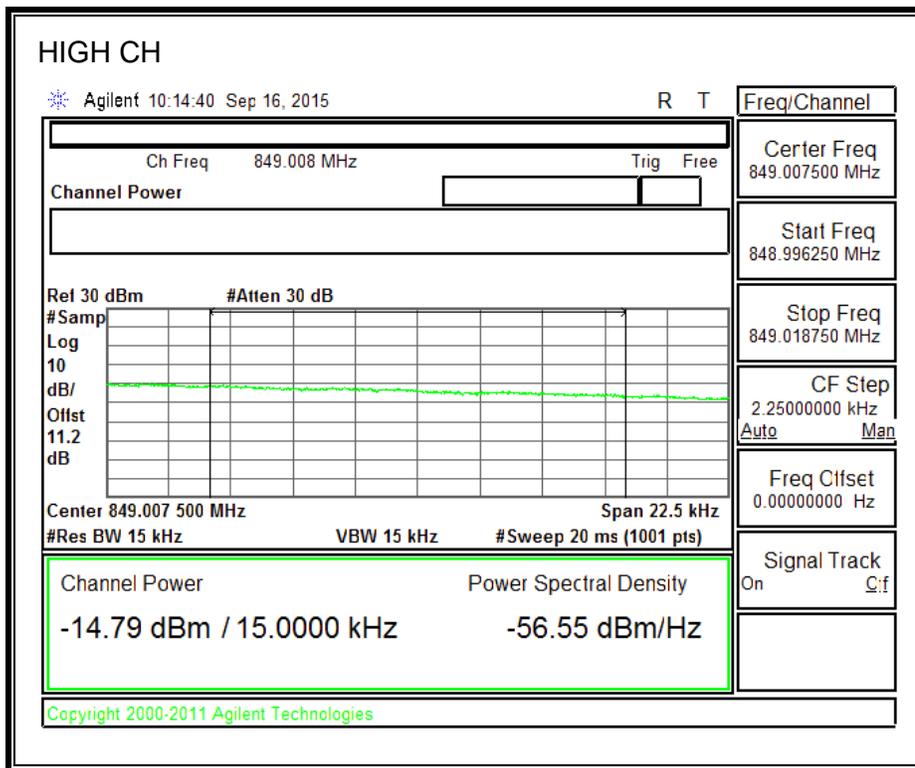


**1900MHz BAND**

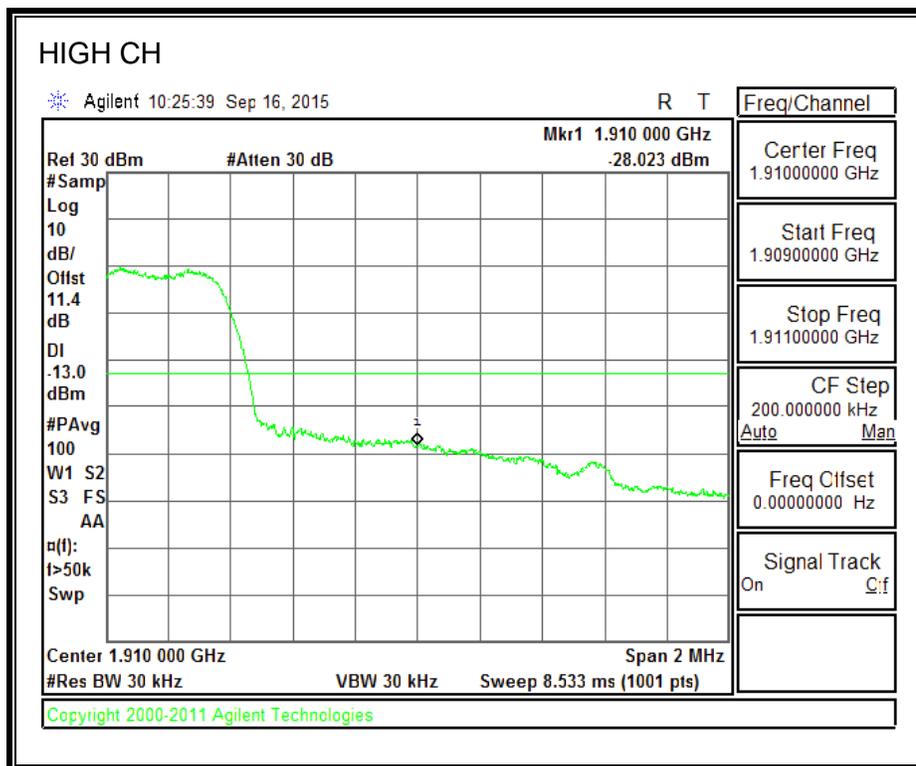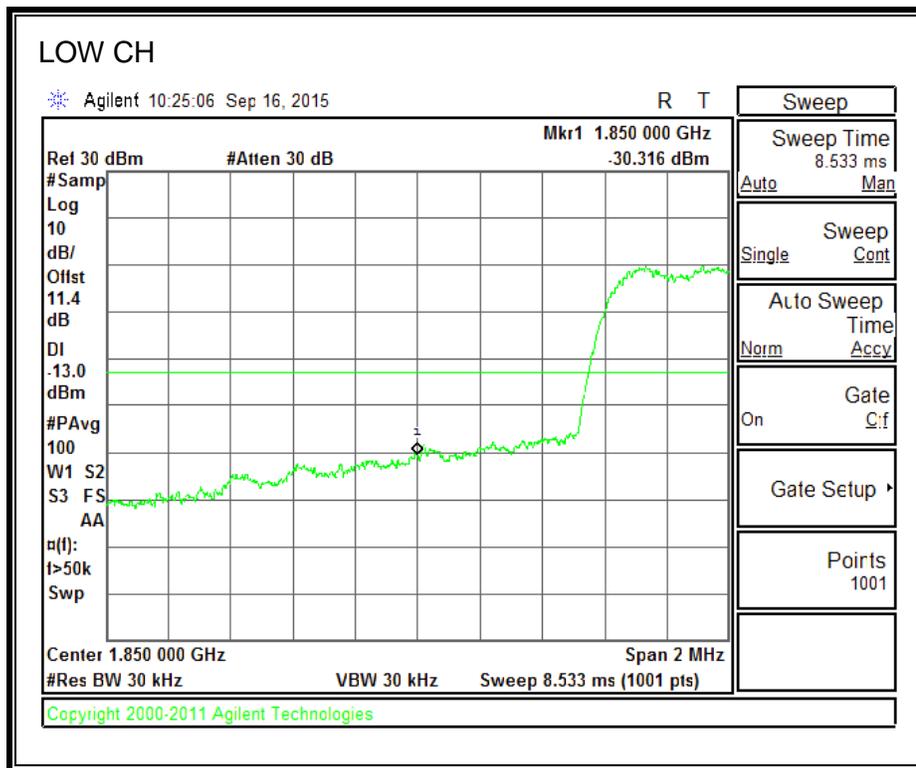


**1700MHz BAND**

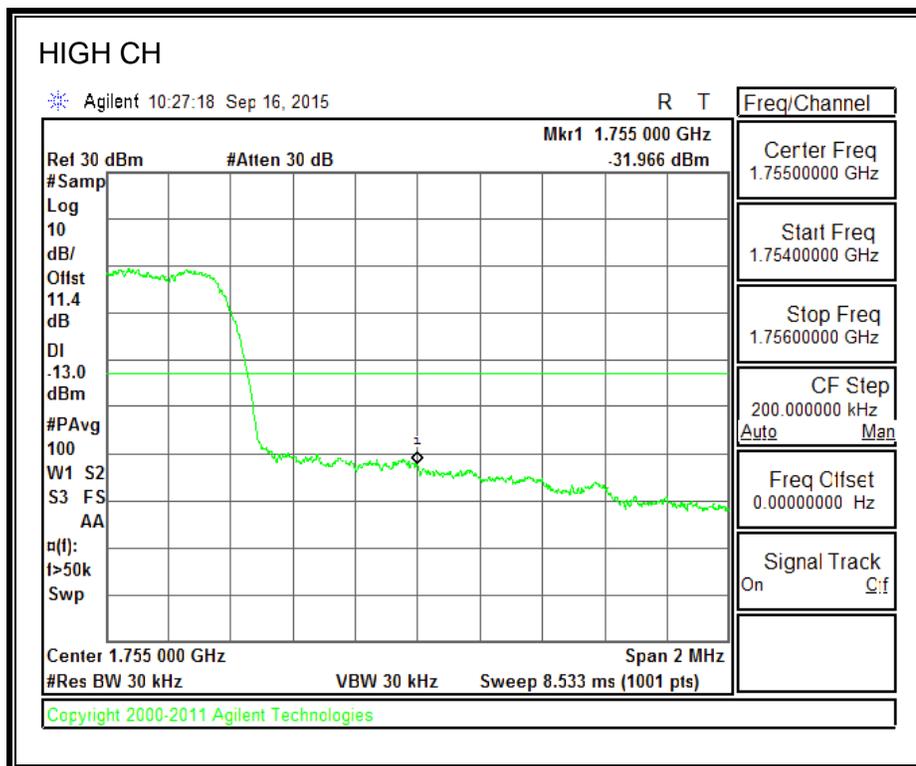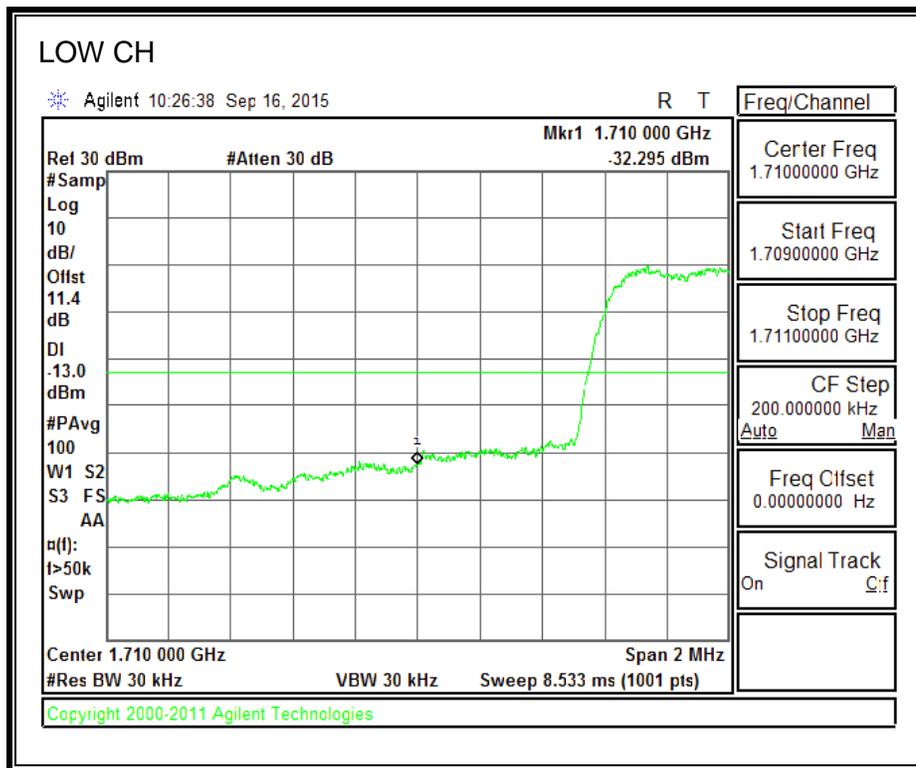


### 8.2.6. CDMA2000 EVDO REV A BC10 MASK

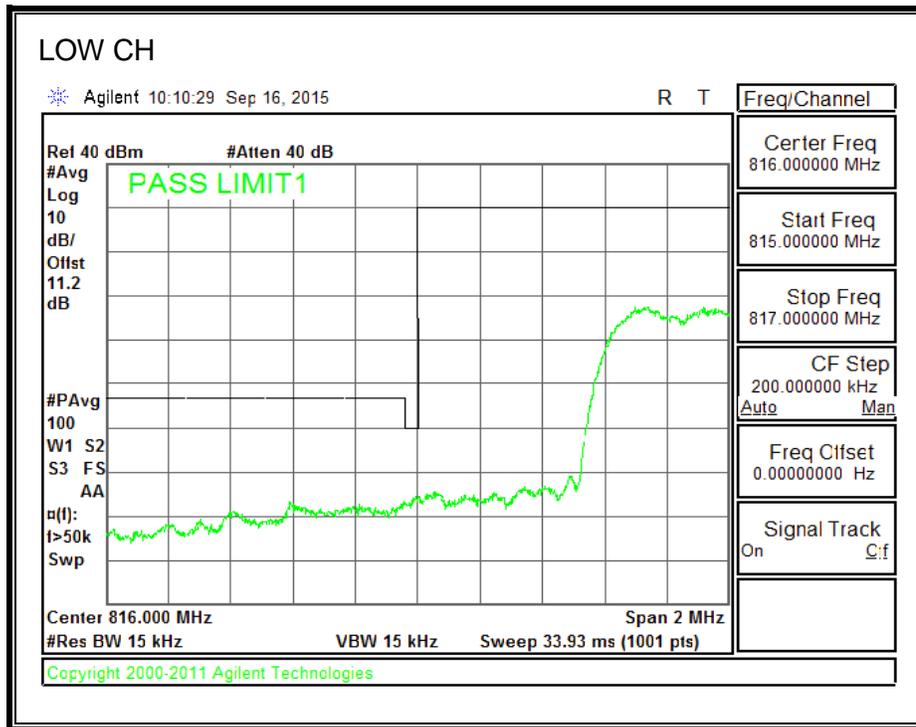


Note: RBW=1% of EBW

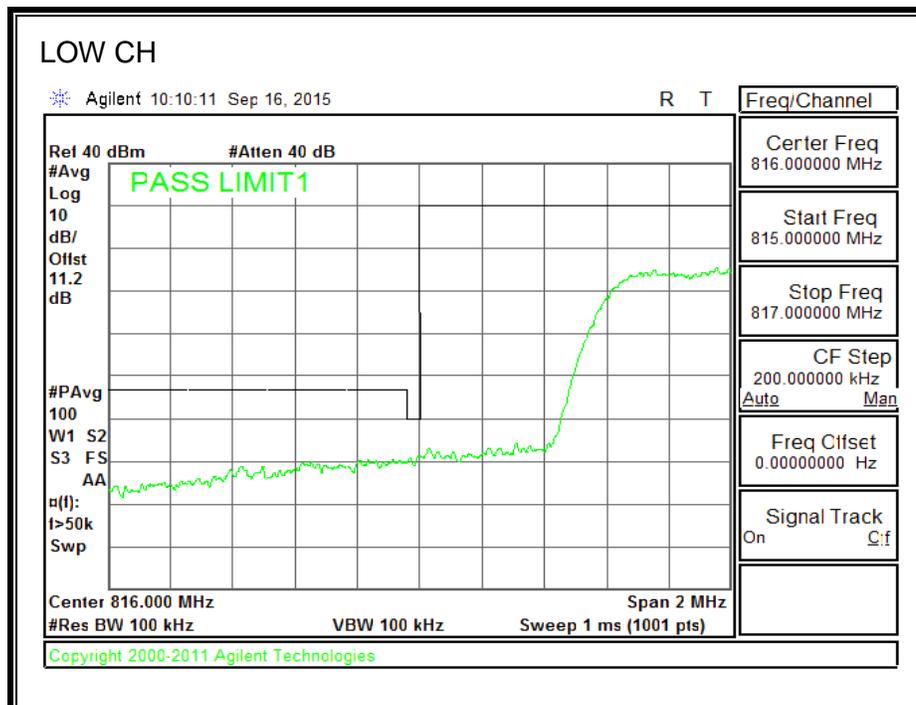

Note: RBW of 1% of 37.5KHz of outer channel frequency block

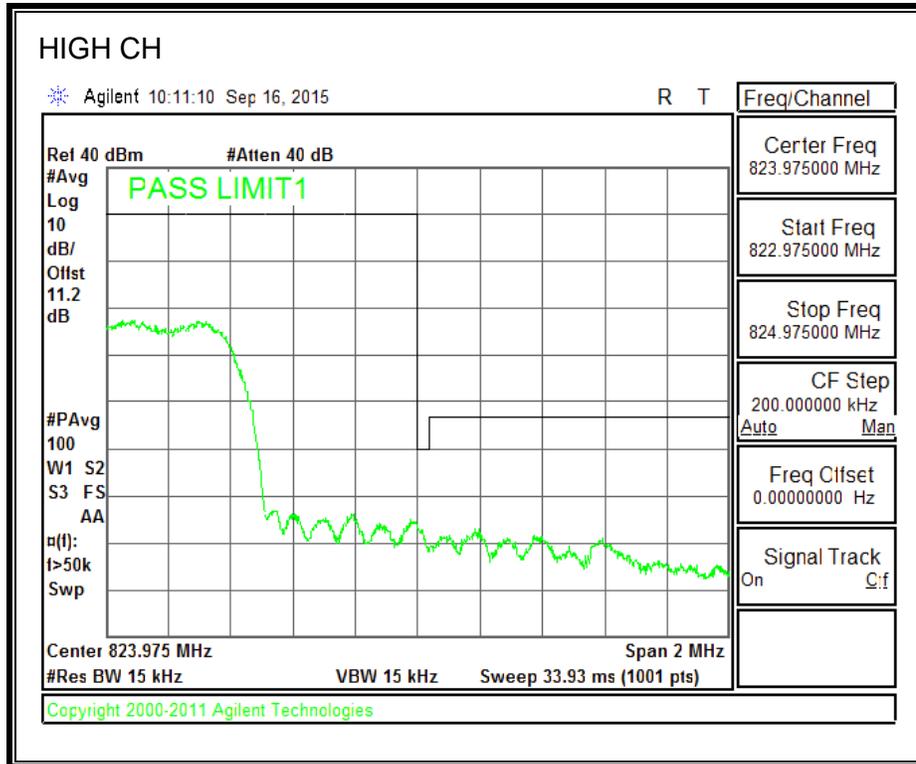



Note: RBW=1% of EBW

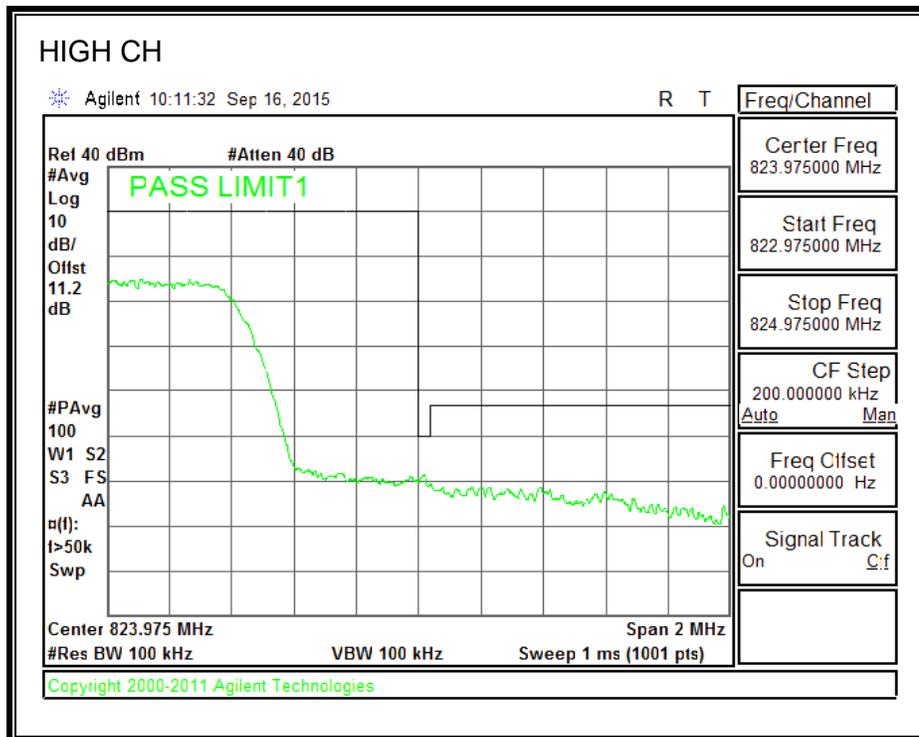



Note: RBW of 1% of 37.5KHz of outer channel frequency block

### 8.2.7. UMTS REL 99



#### 850MHz BAND

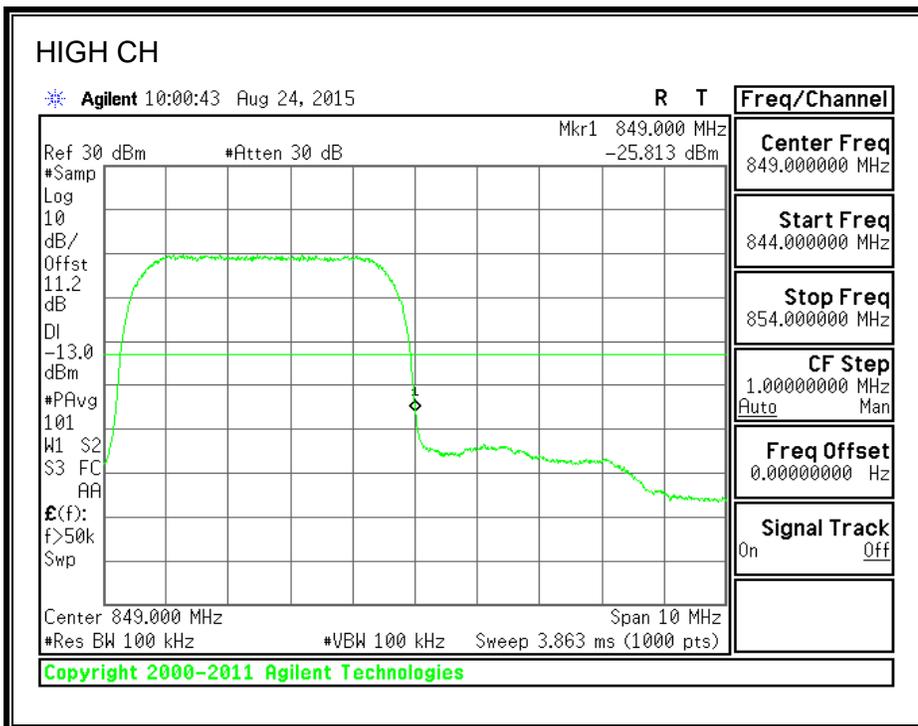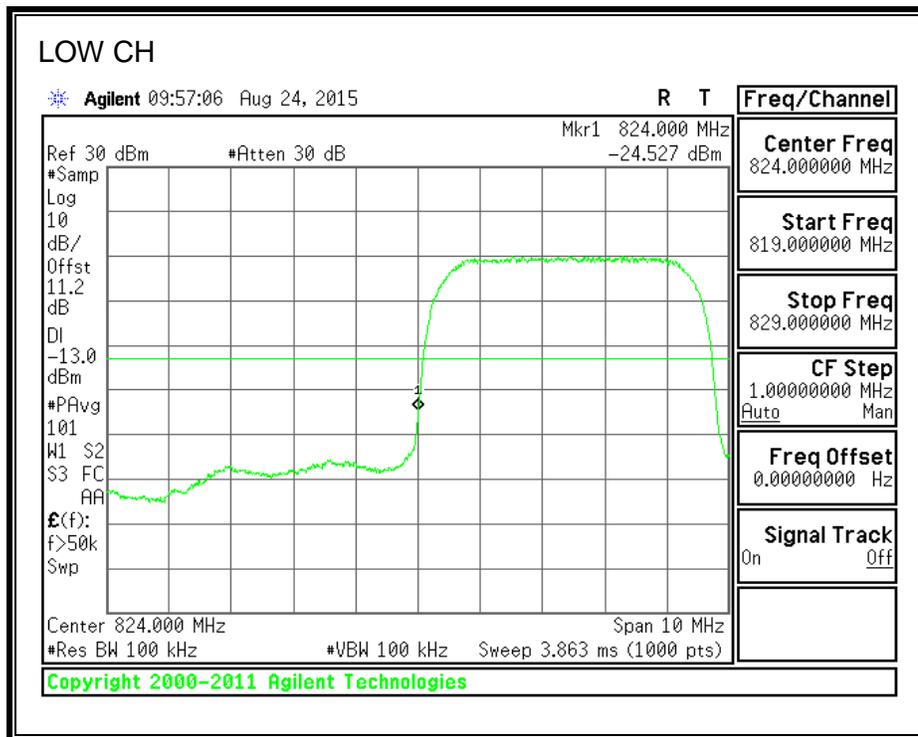

**1900MHz BAND**

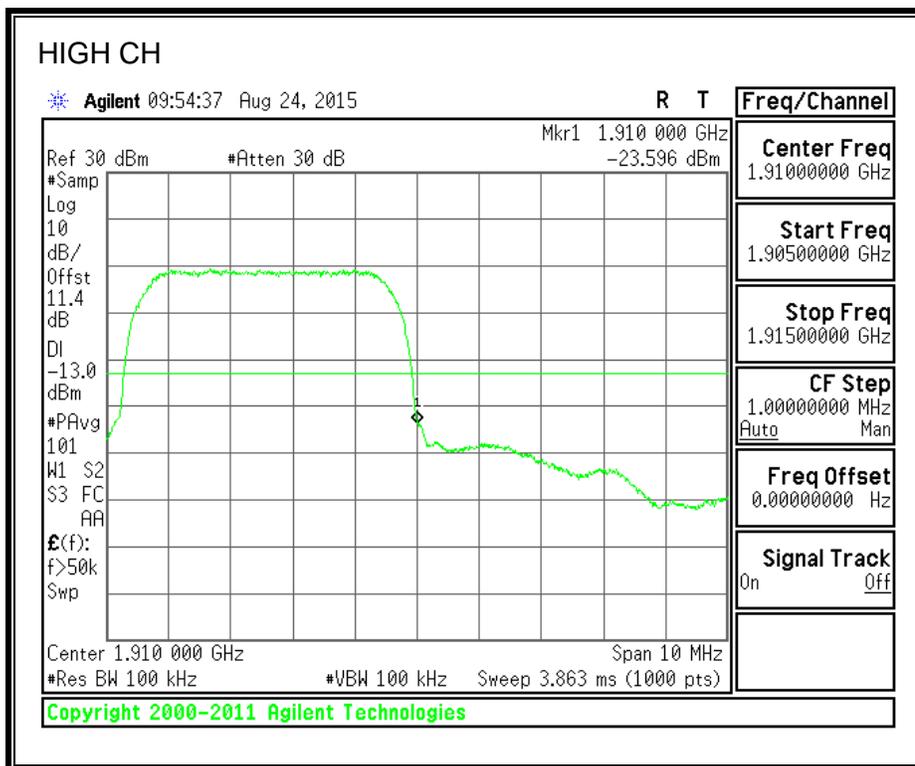
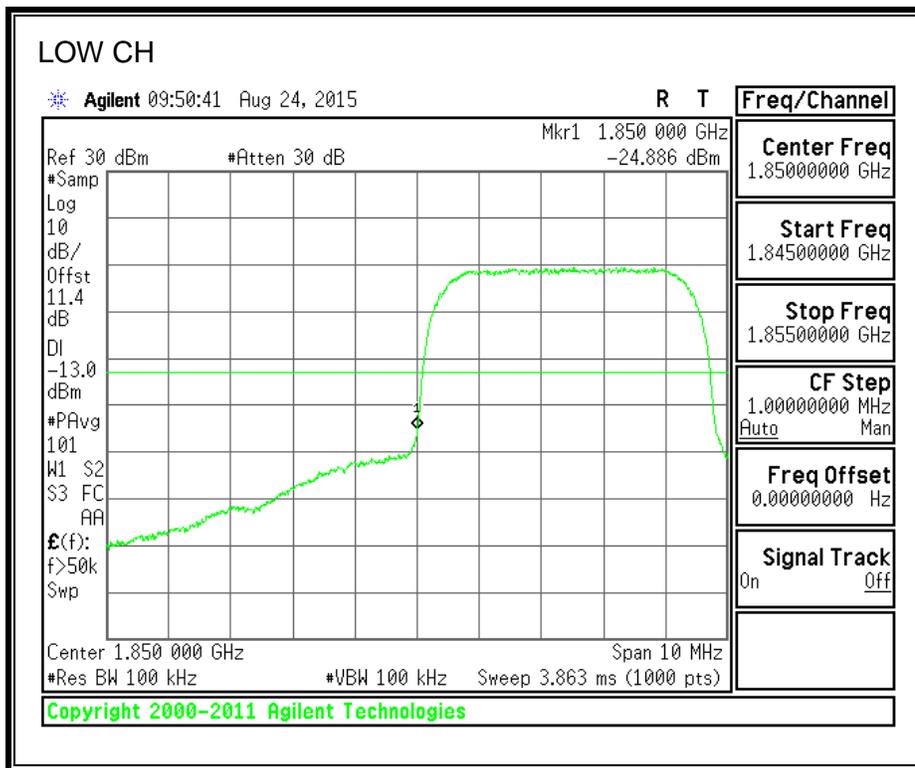


**1700MHz BAND**

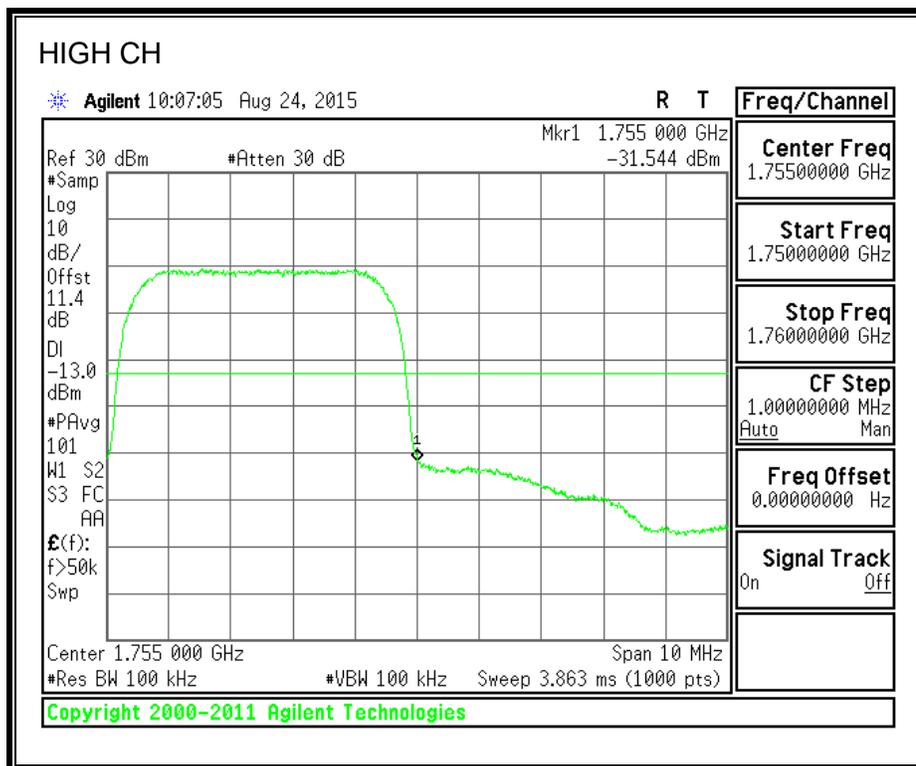
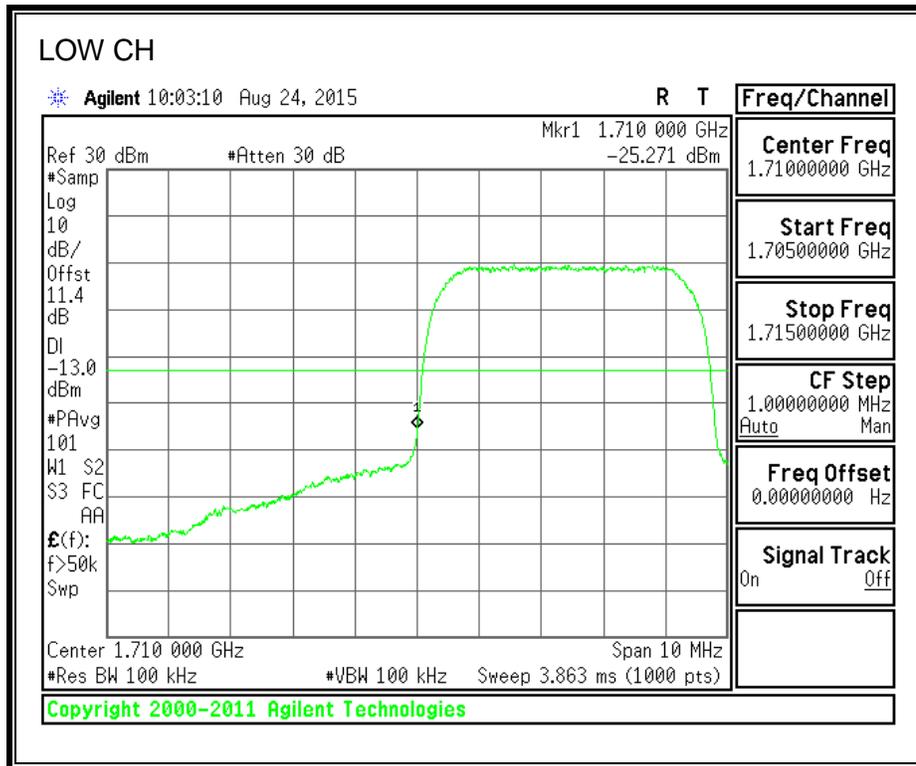


### 8.2.8. UMTS HSDPA



#### 850MHz BAND

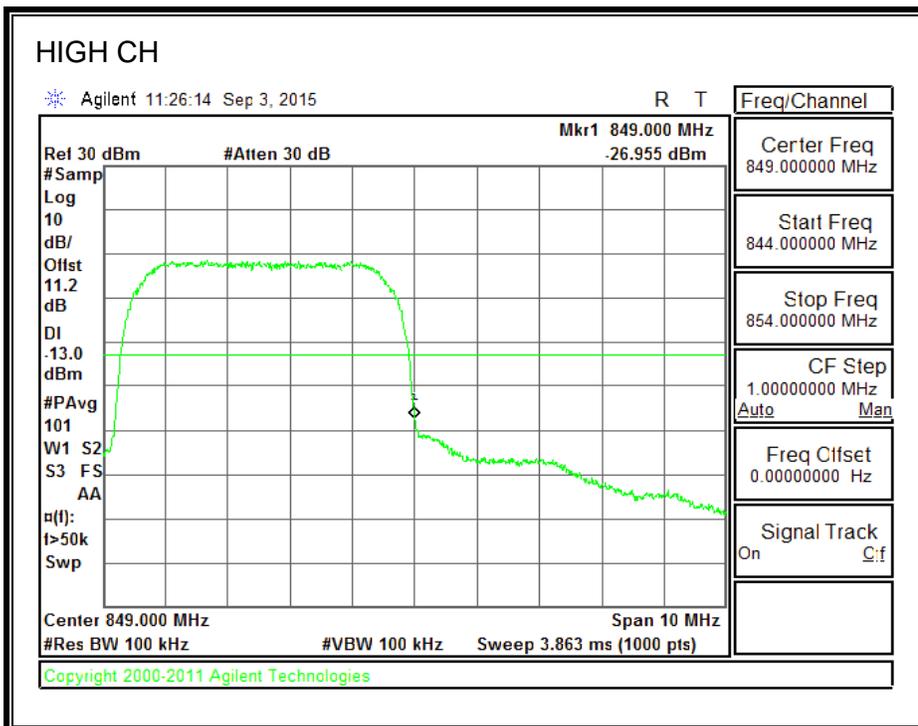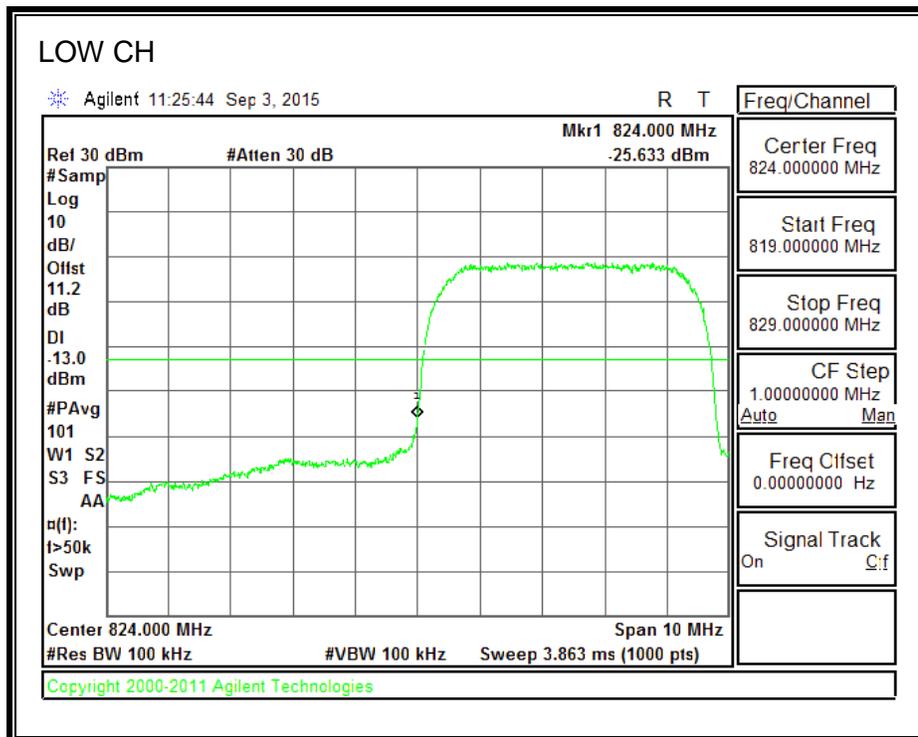

**1900MHz BAND**

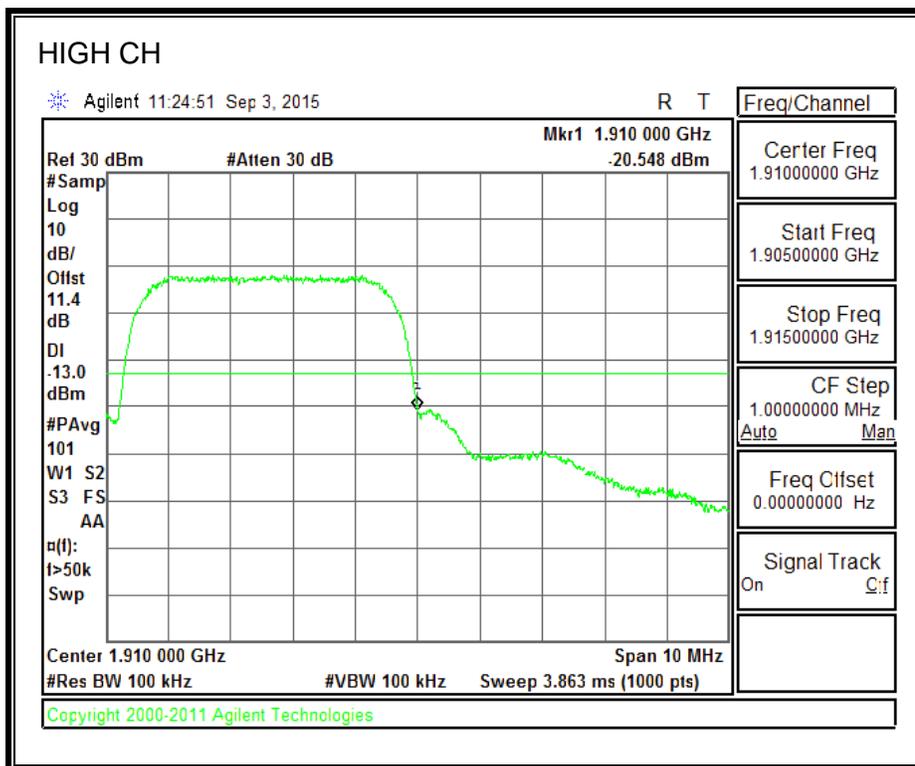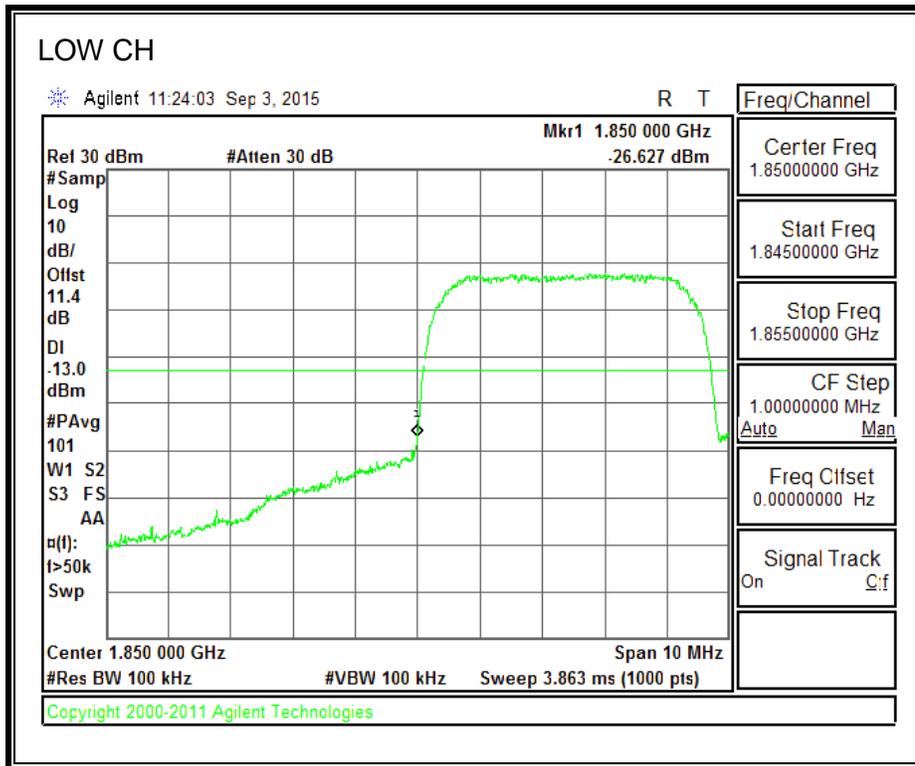

**1700MHz BAND**

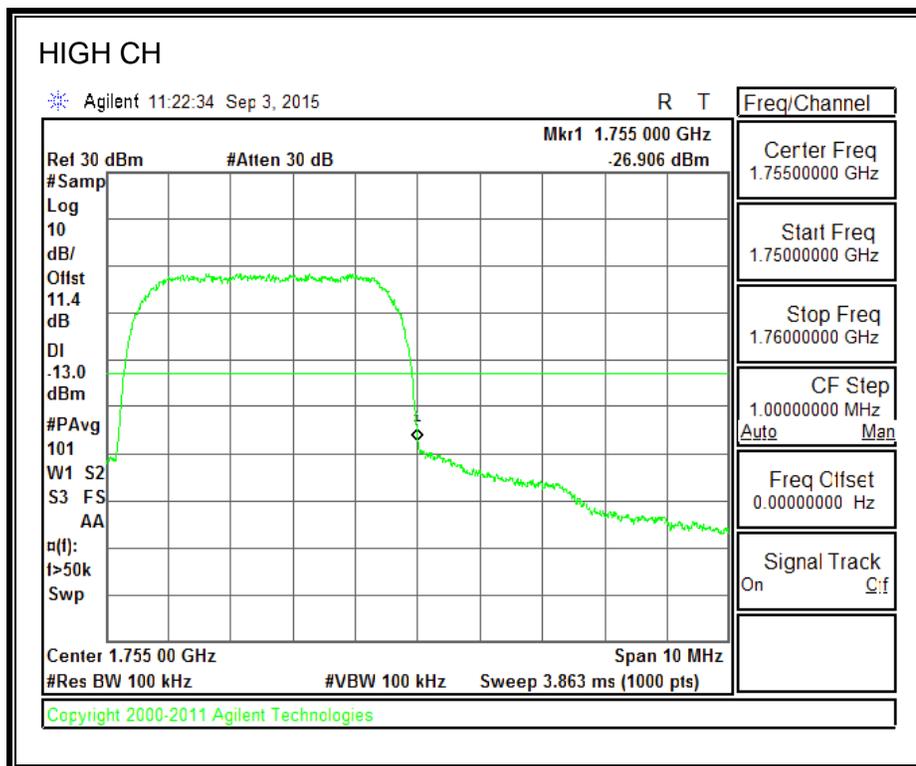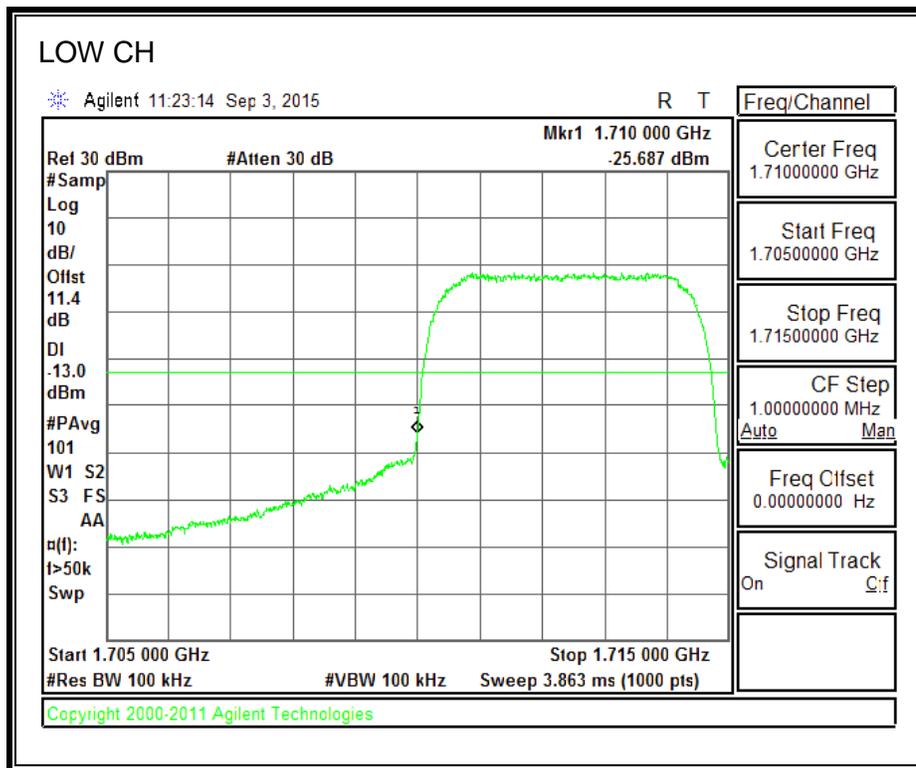

### **8.3. OUT OF BAND EMISSIONS**

#### **RULE PART(S)**

FCC: §2.1051, §22.901, §22.917, §24.238 and §90.691

#### **LIMITS**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

#### **TEST PROCEDURE**

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.



For each out of band emissions measurement:


- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

#### **RESULTS**


### 8.3.1. GSM-GPRS



#### 850MHz BAND

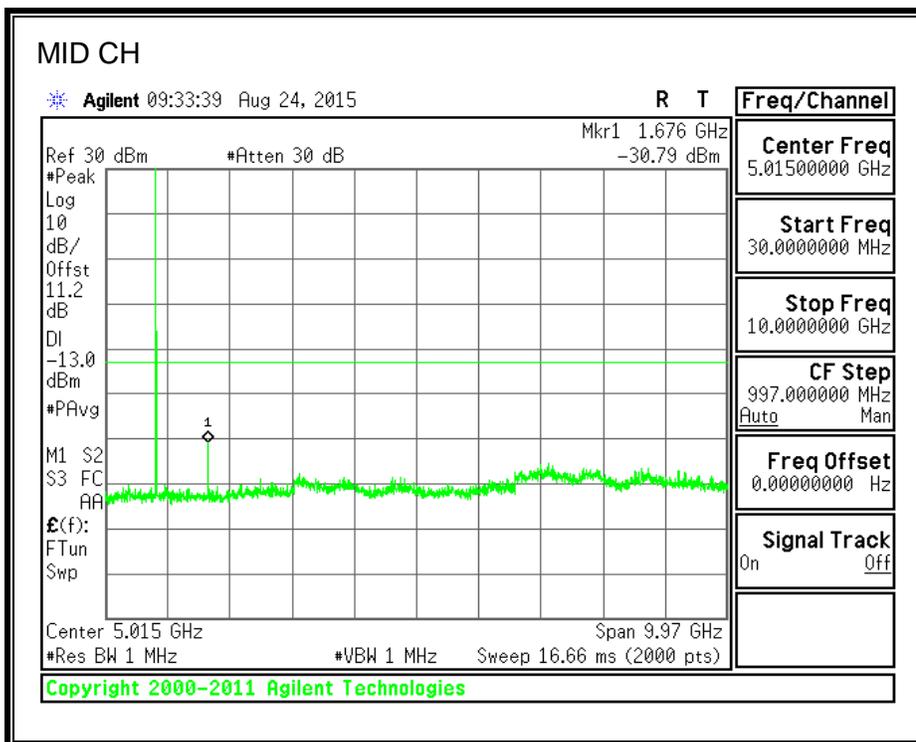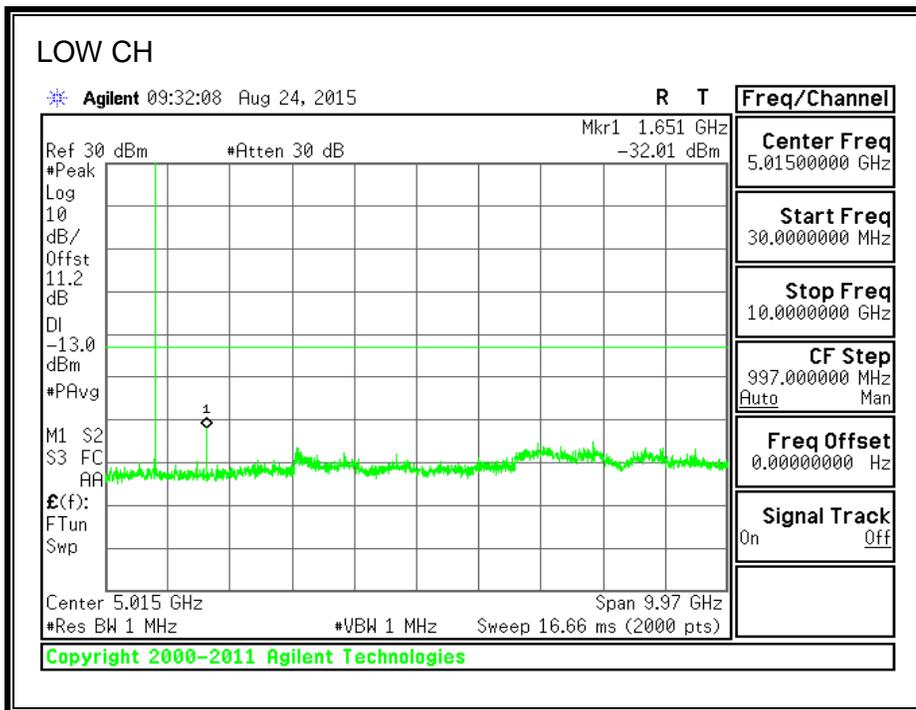

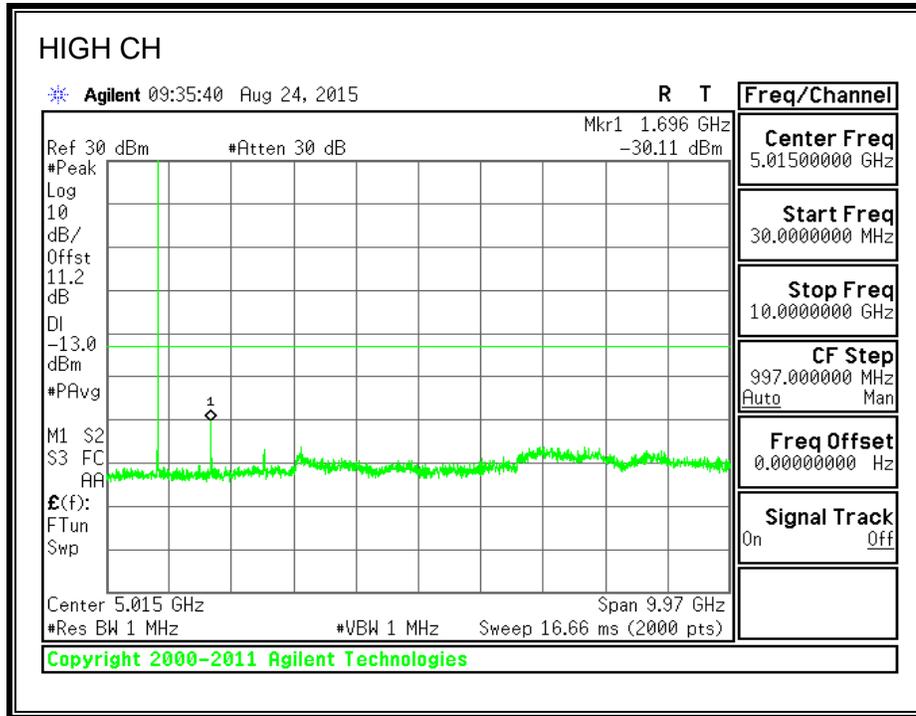



**1900MHz BAND**

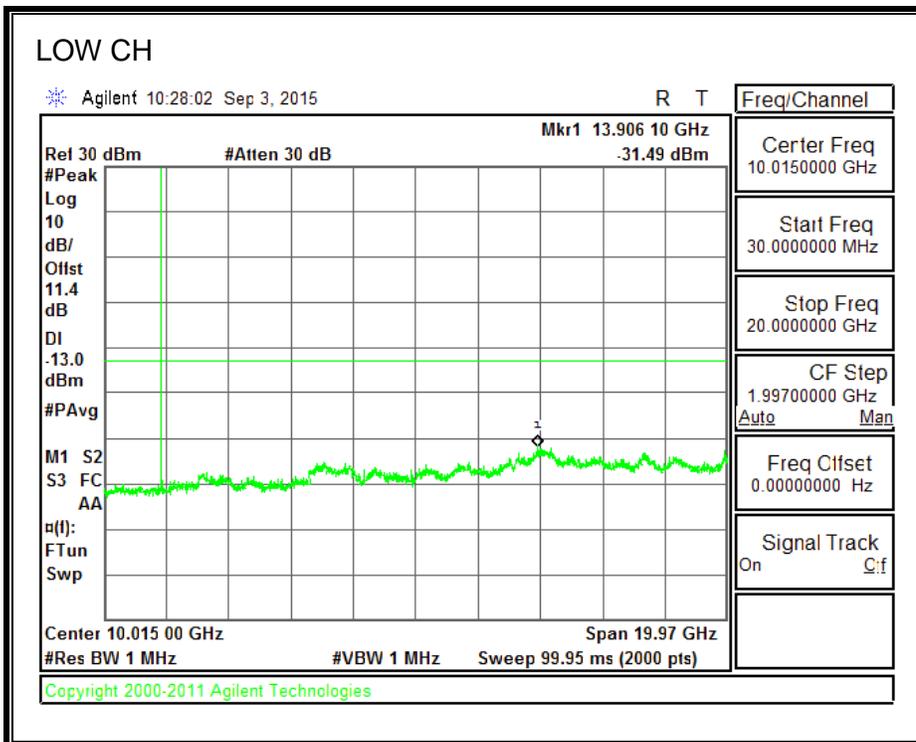


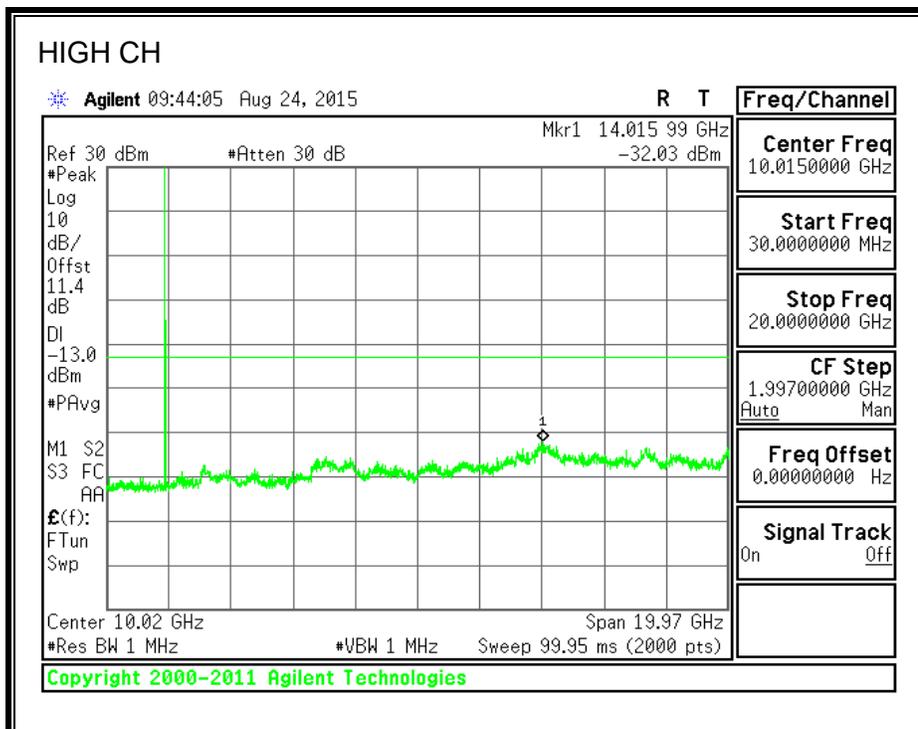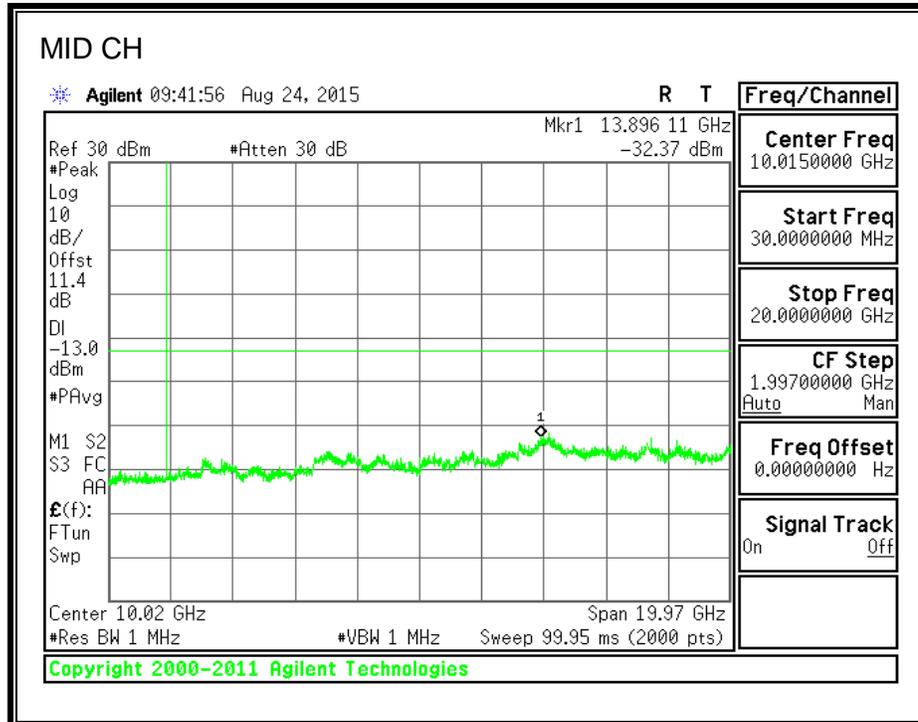



### 8.3.2. GSM-EGPRS


#### 850MHz BAND

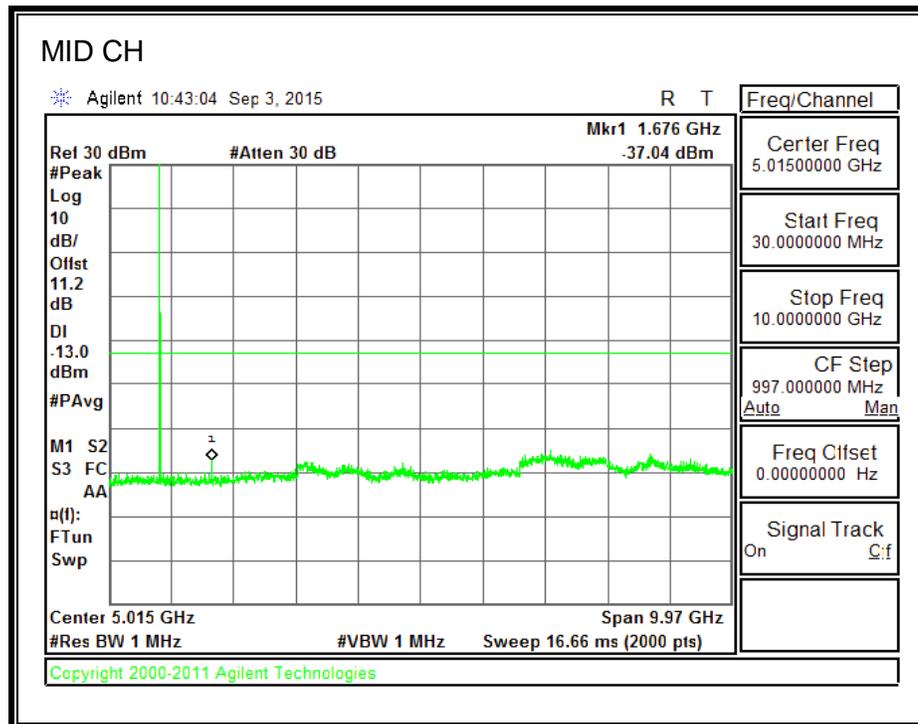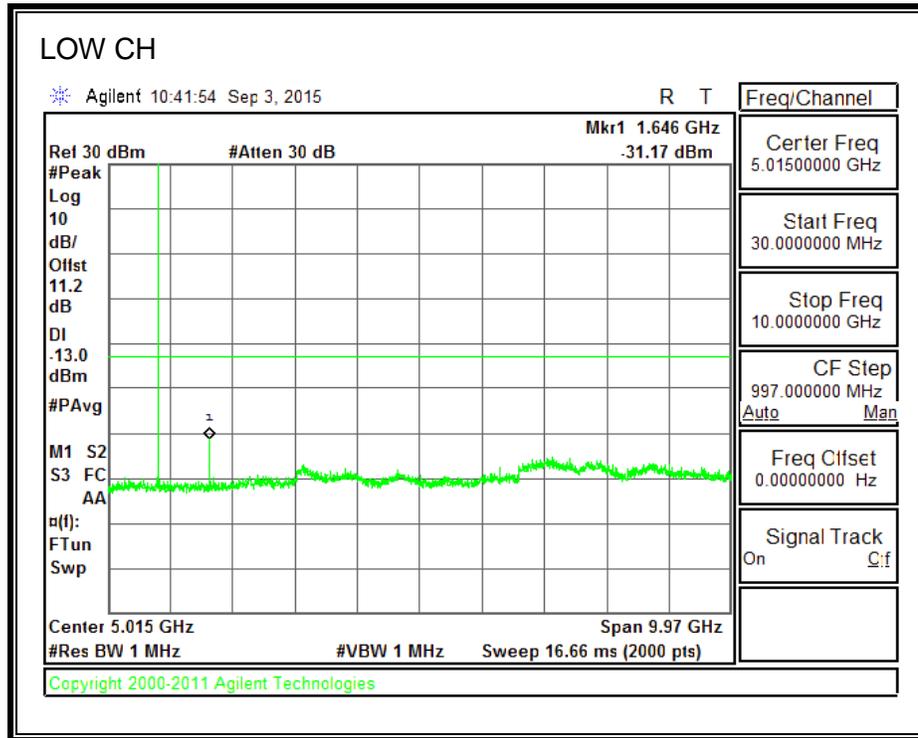

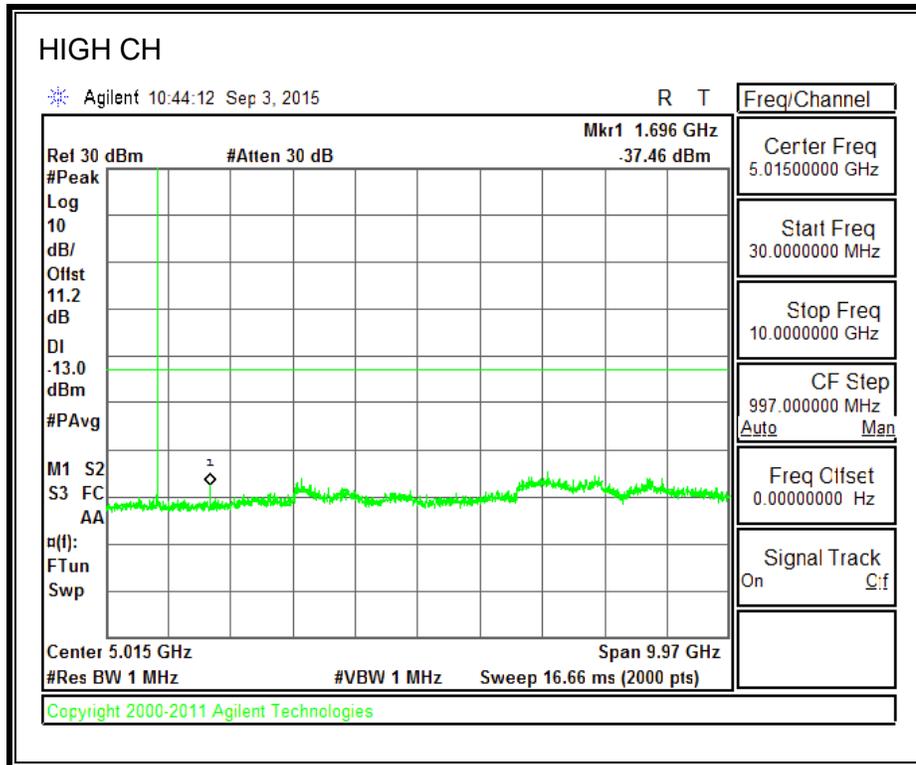



**1900MHz BAND**

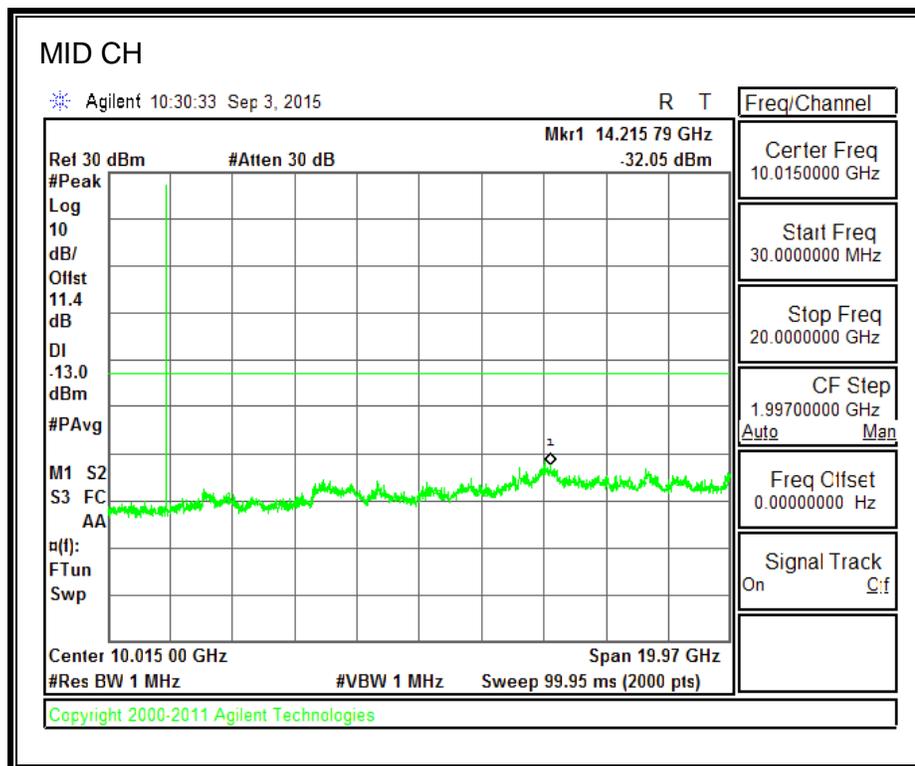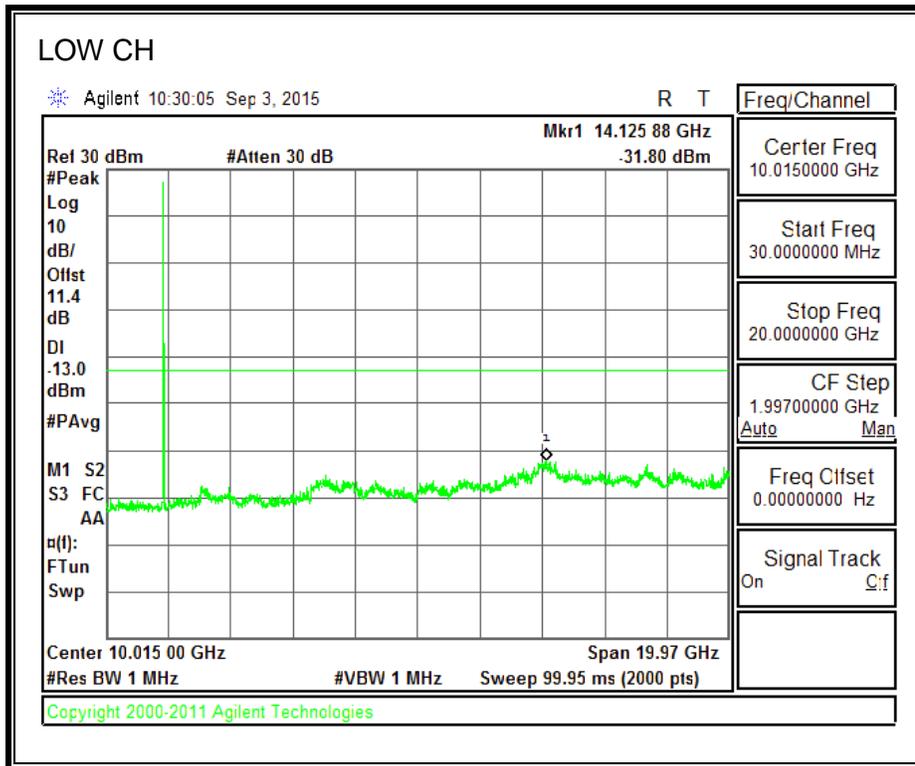


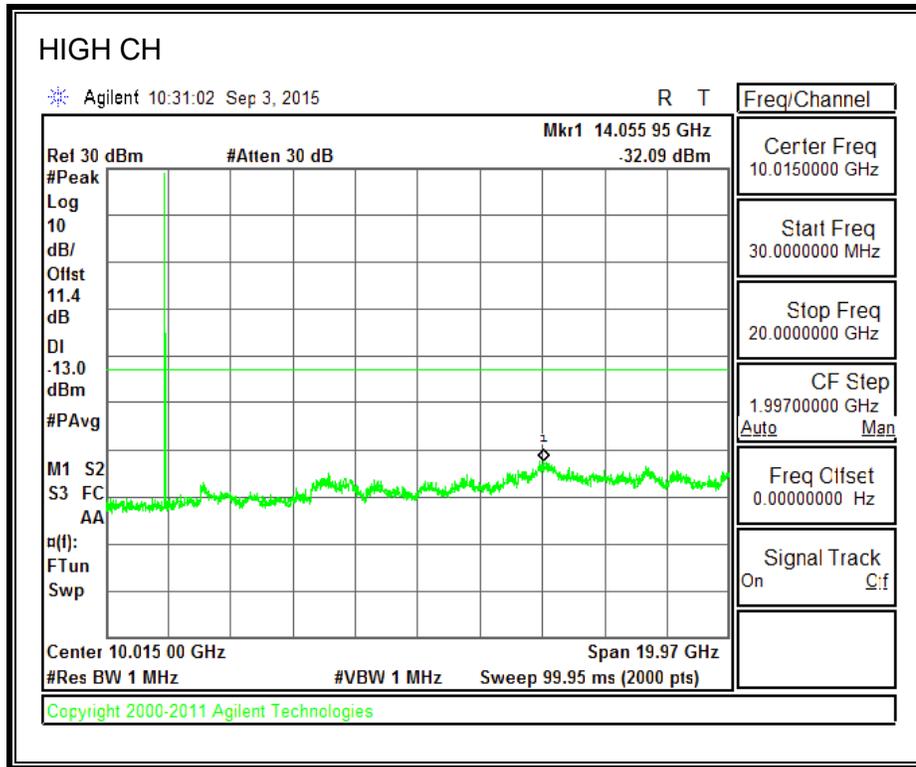



### 8.3.3. CDMA2000 1xRTT


#### 850MHz BAND

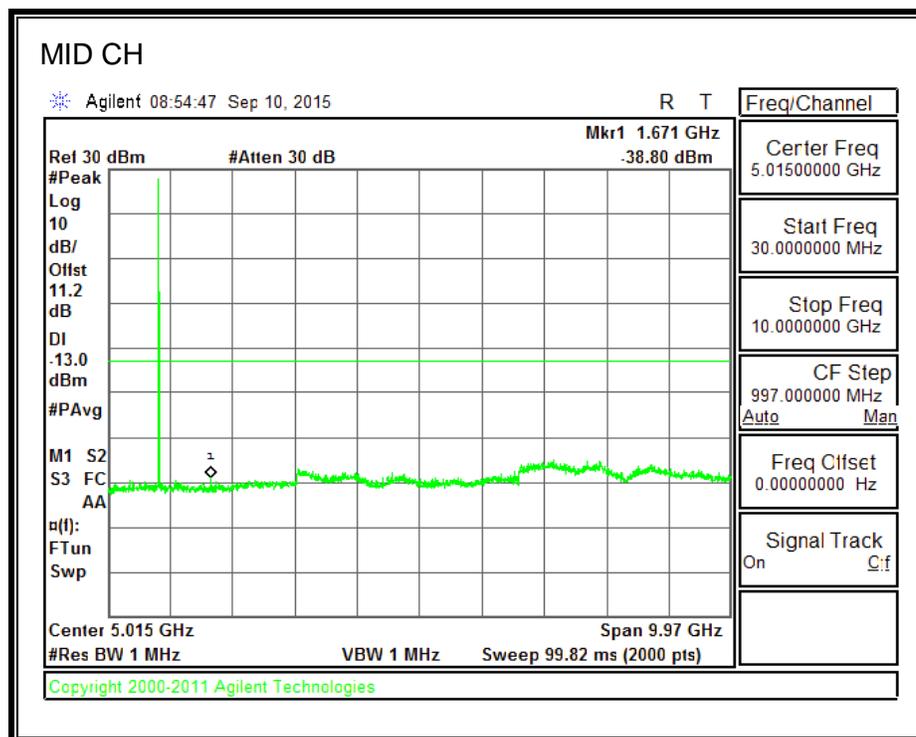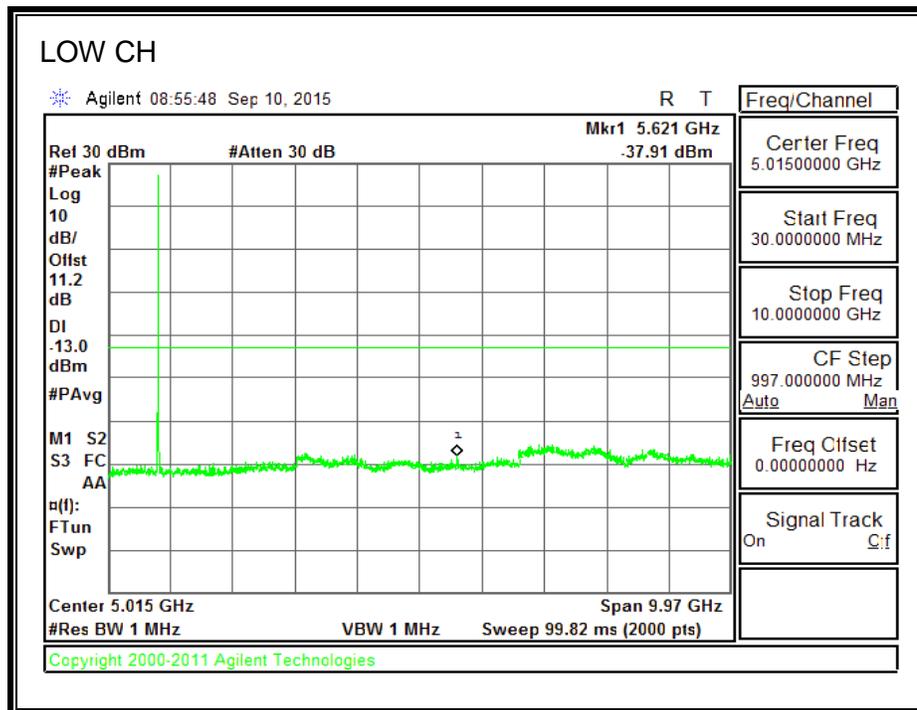


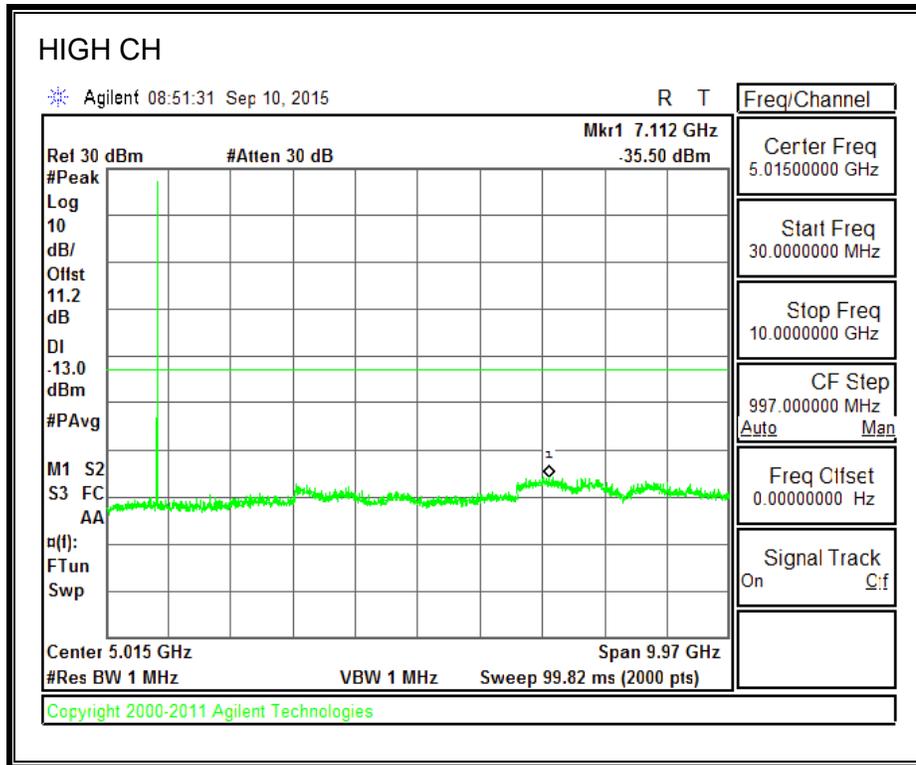



**1900MHz BAND**

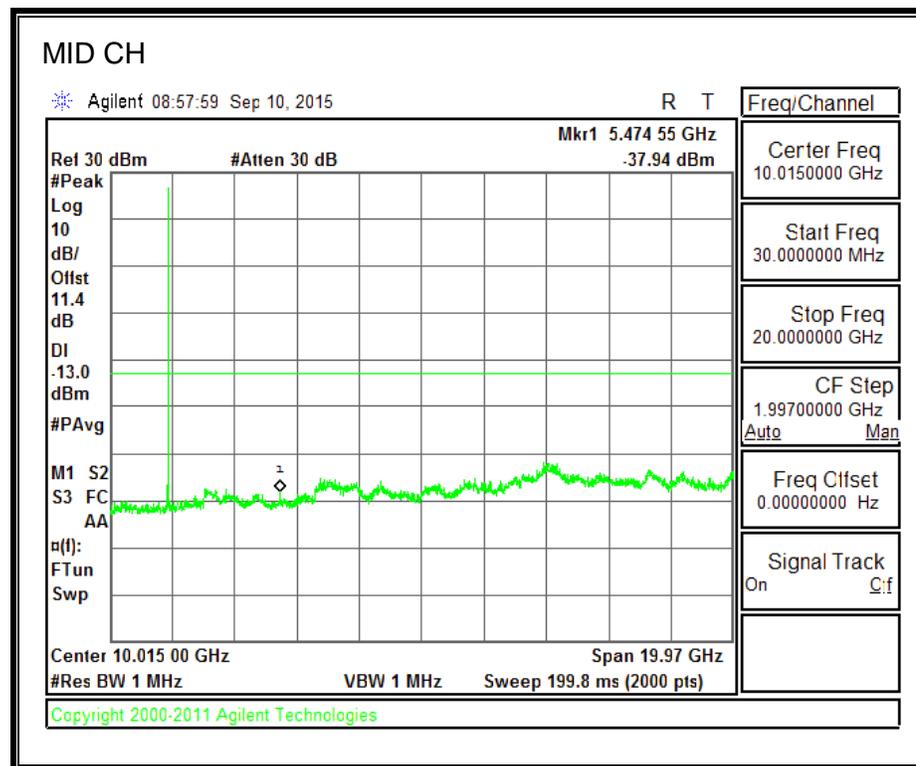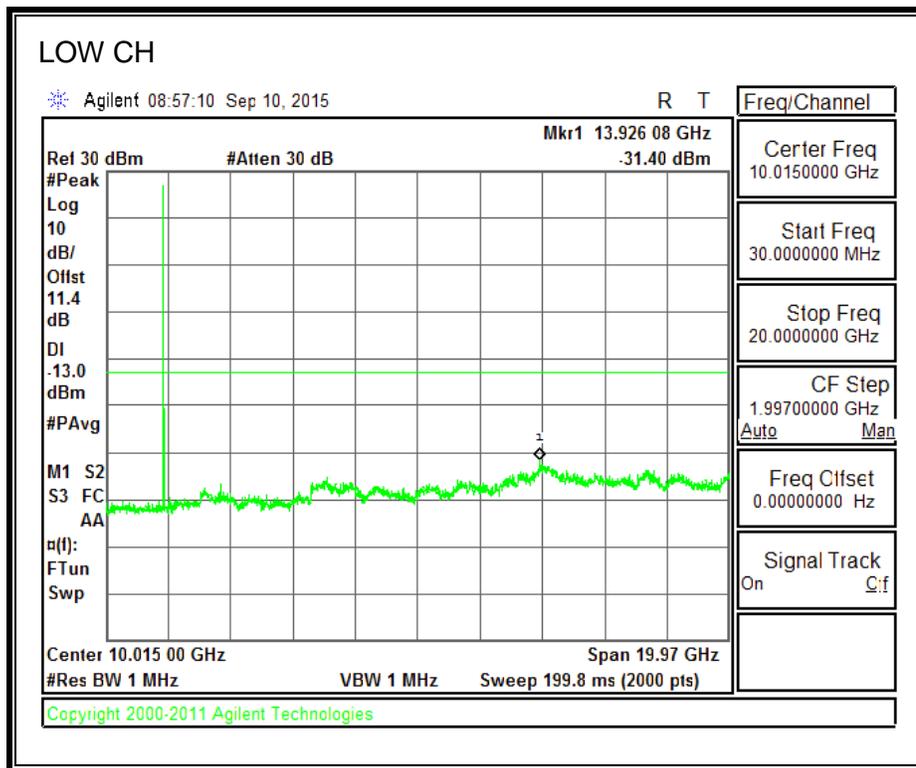


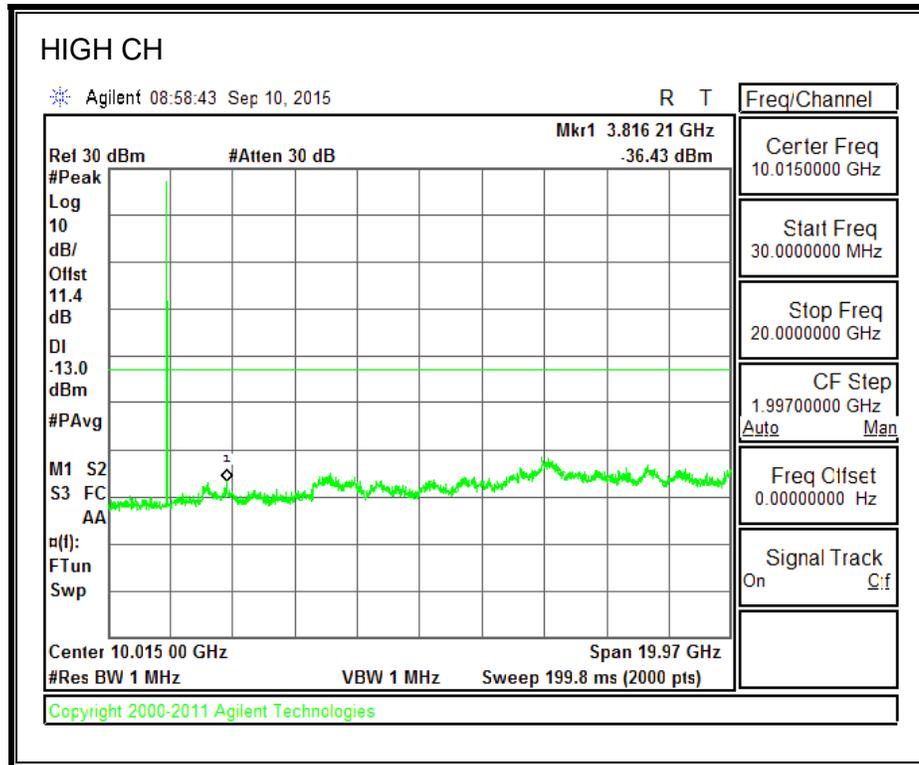



**1700MHz BAND**

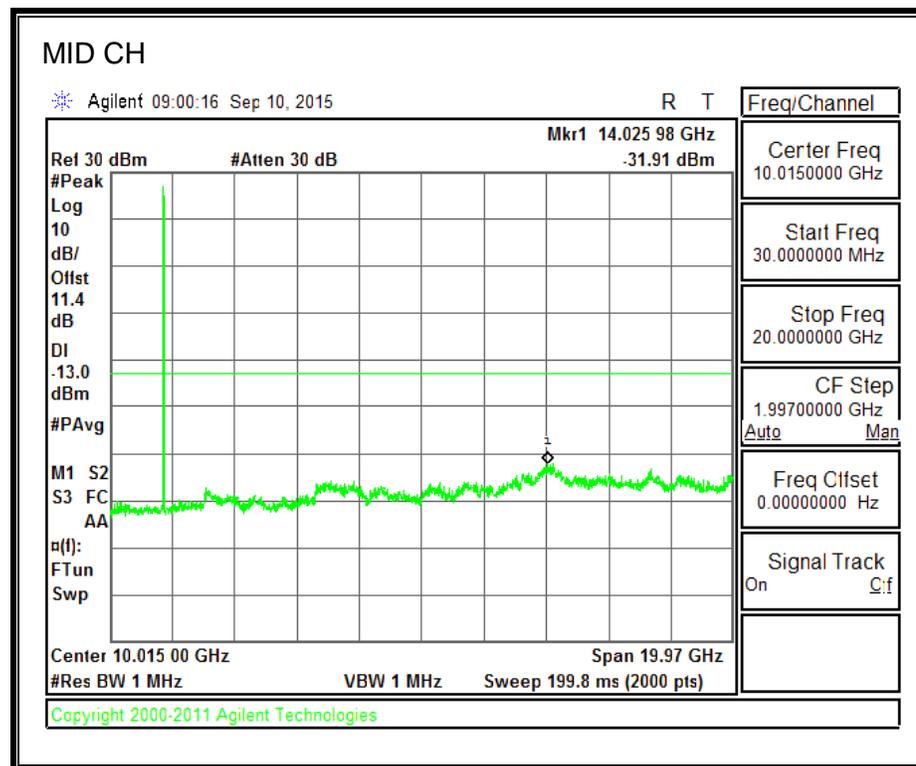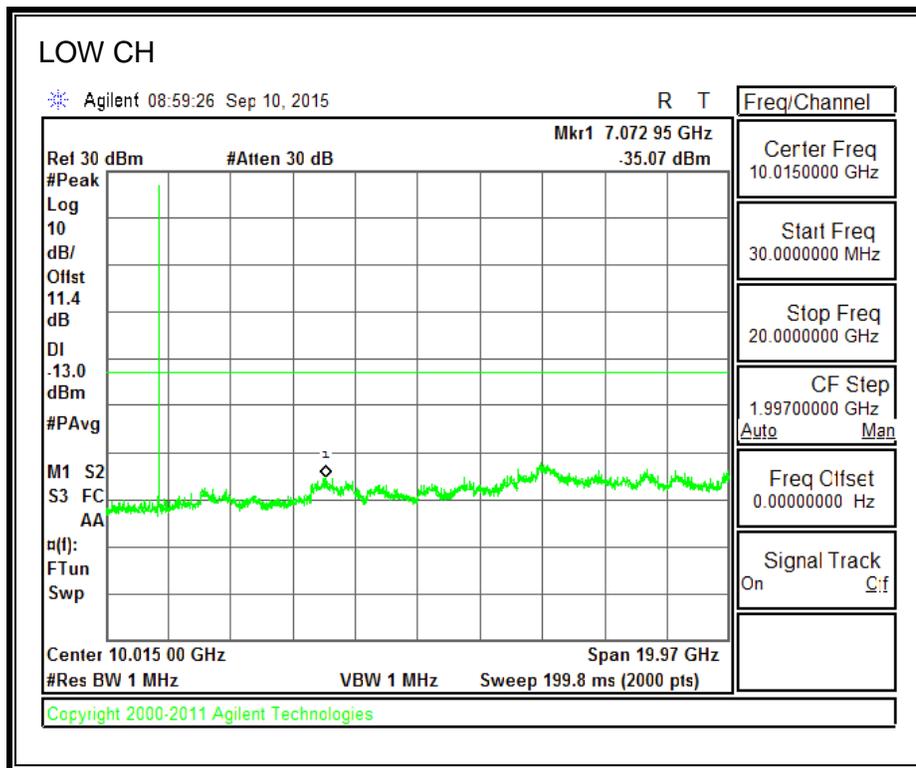

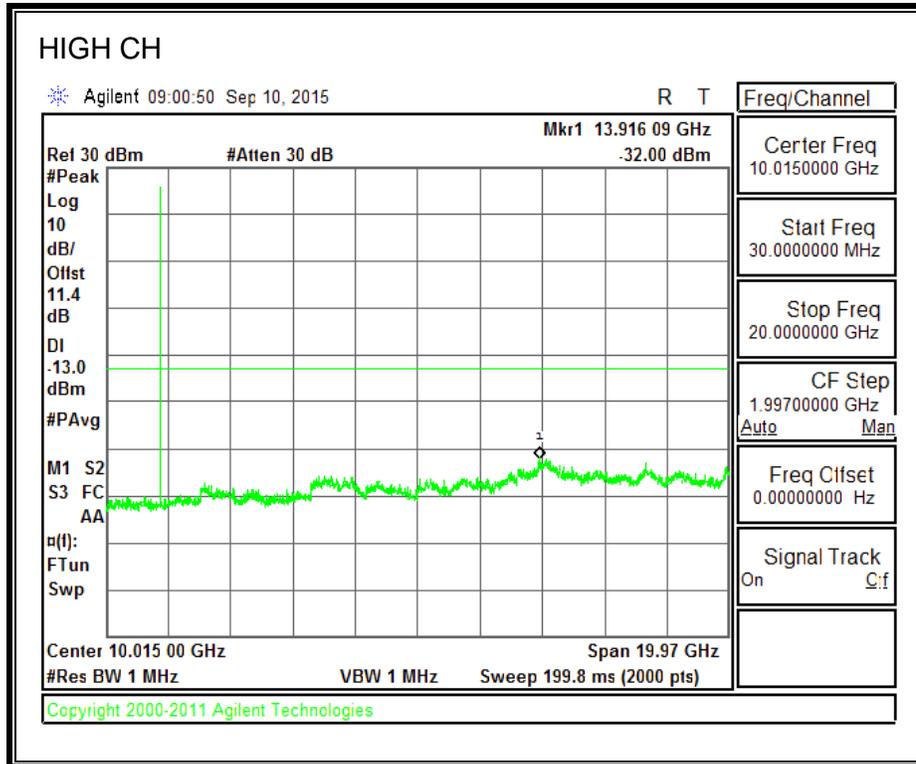



**800MHz SECONDARY BAND**

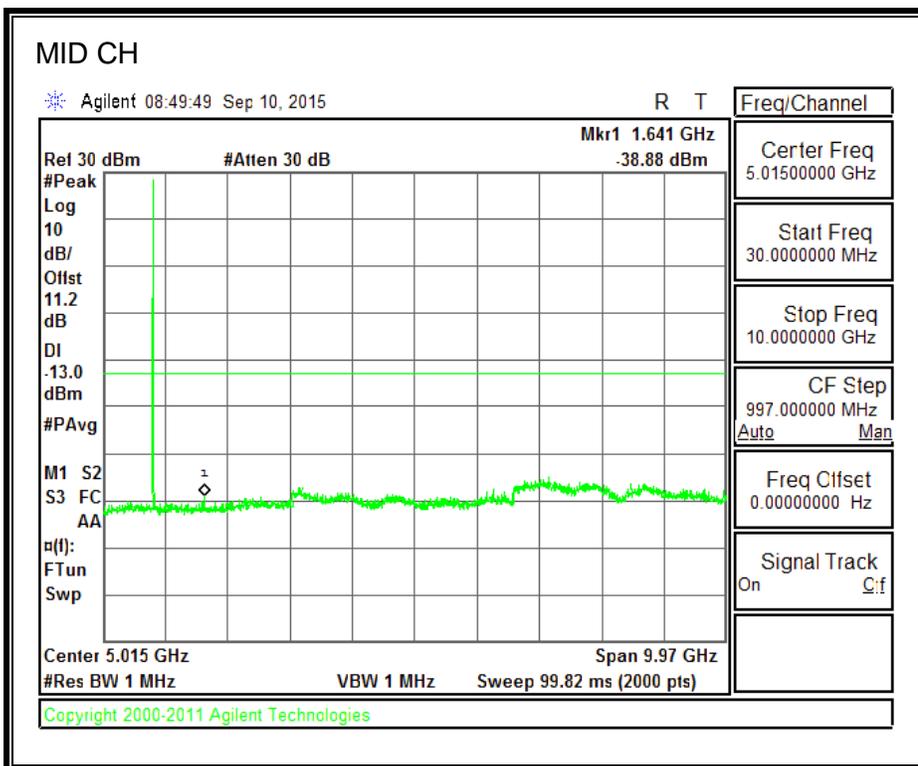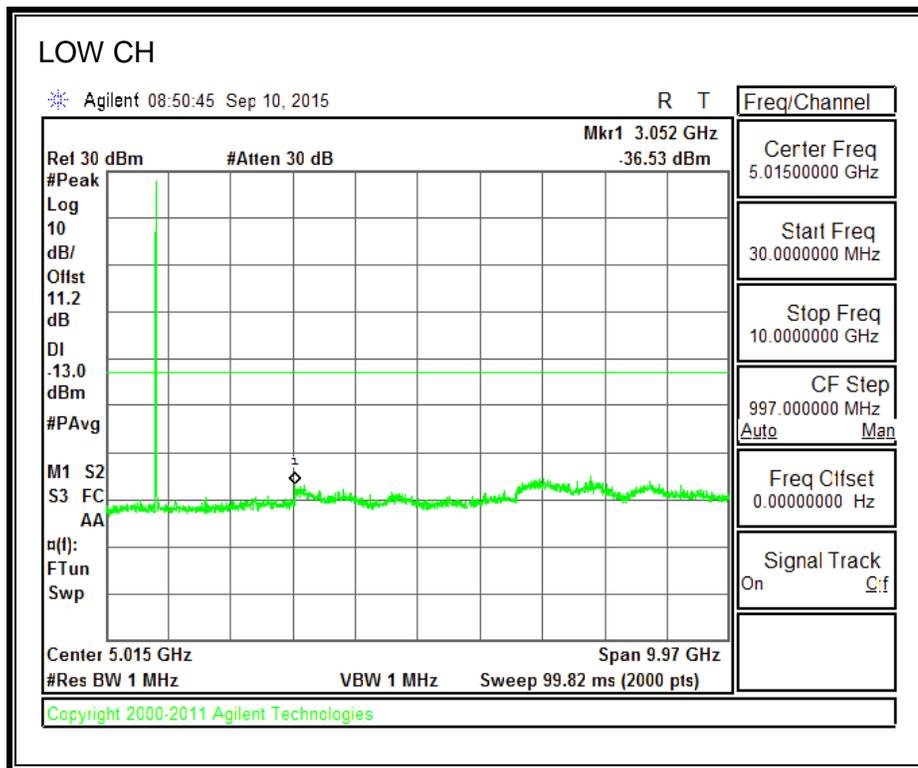


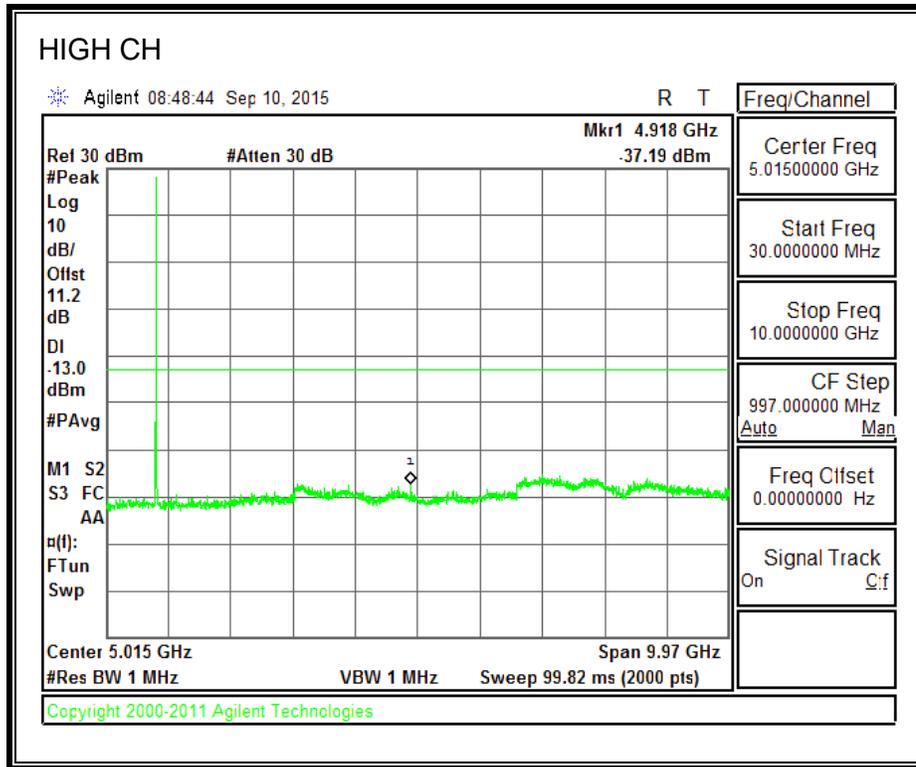



### 8.3.4. CDMA2000 EVDO REV A


#### 850MHz BAND

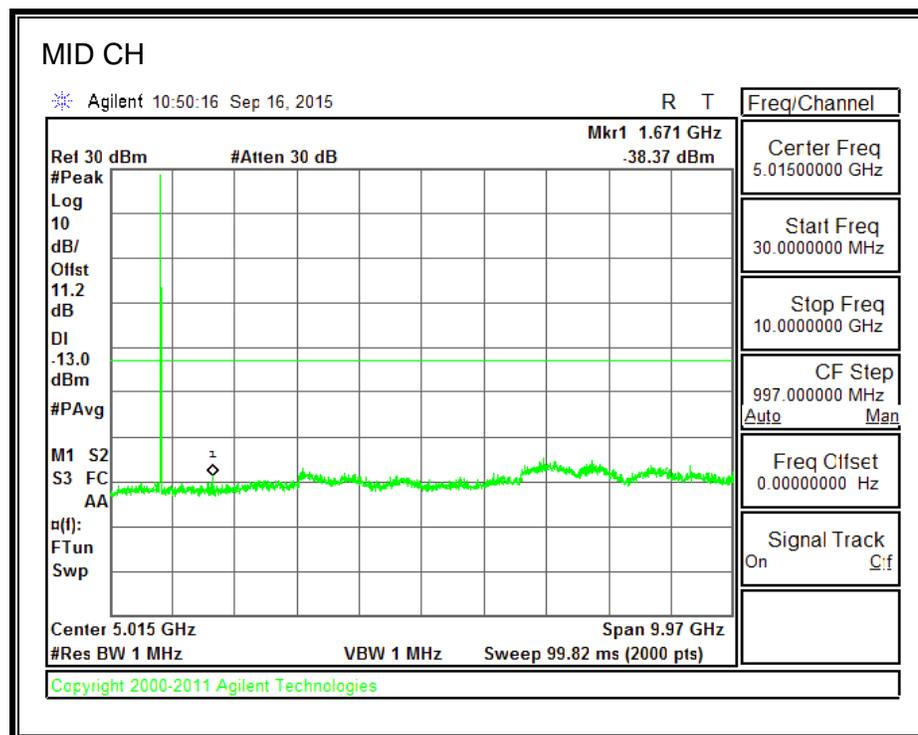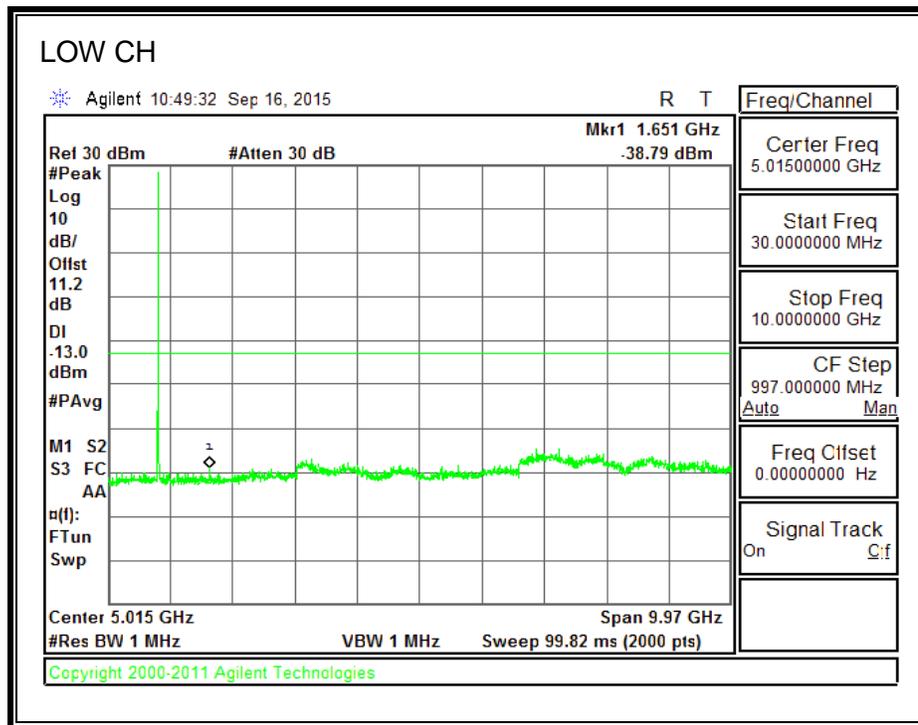


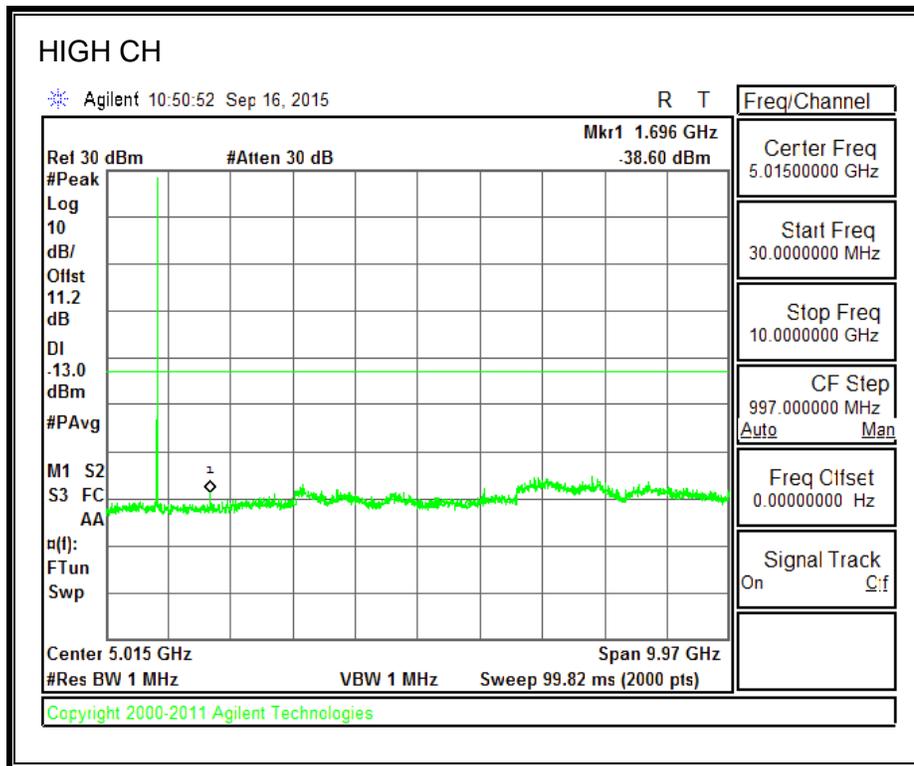



**1900MHz BAND**

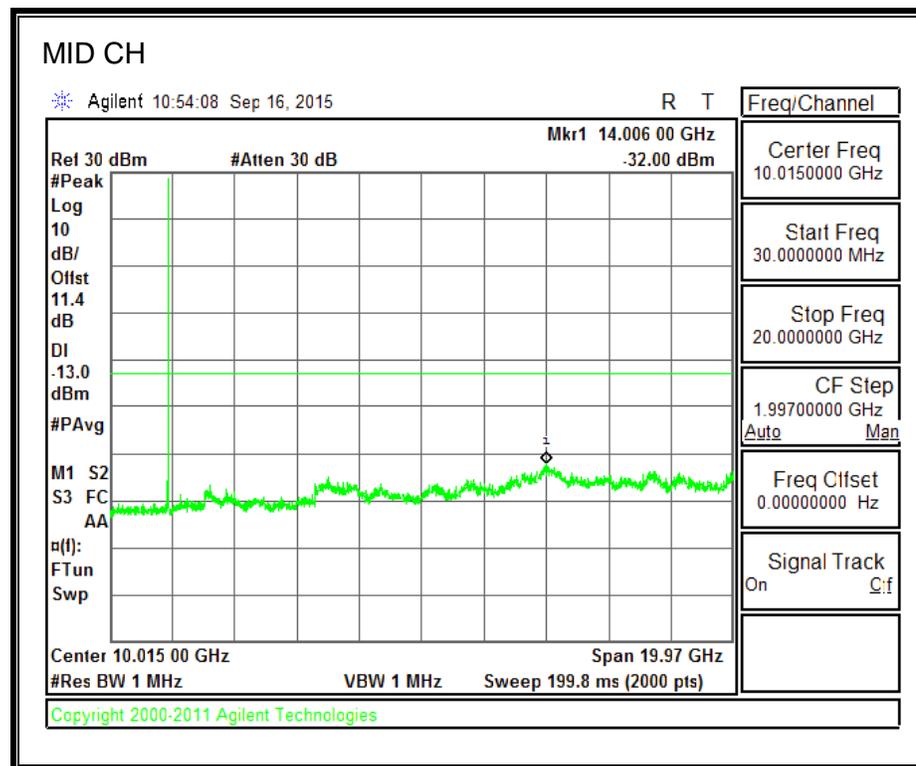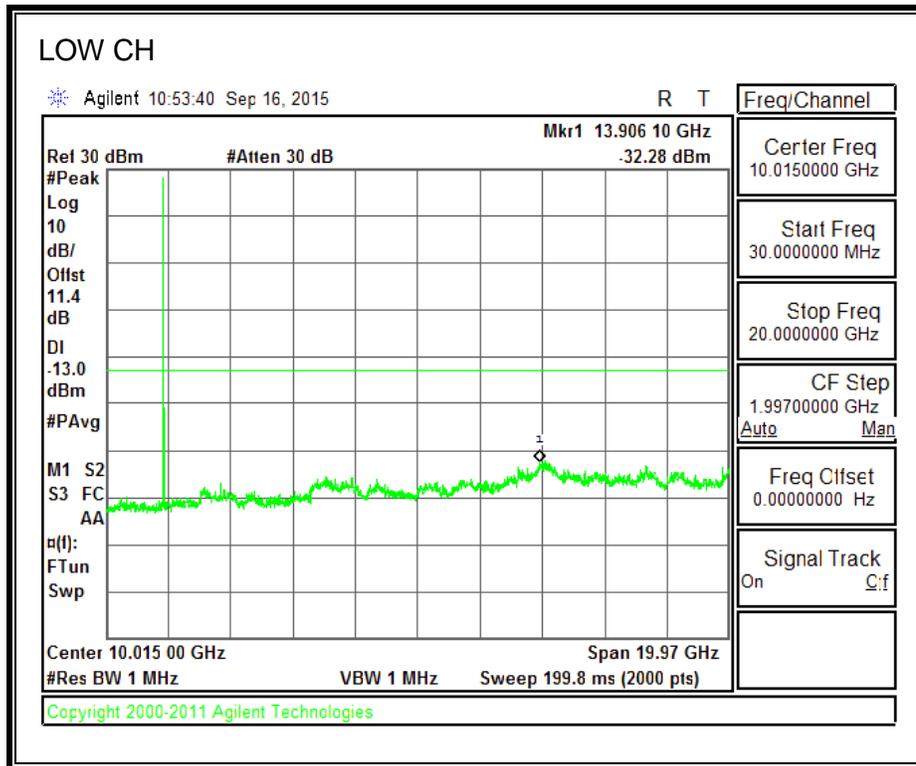


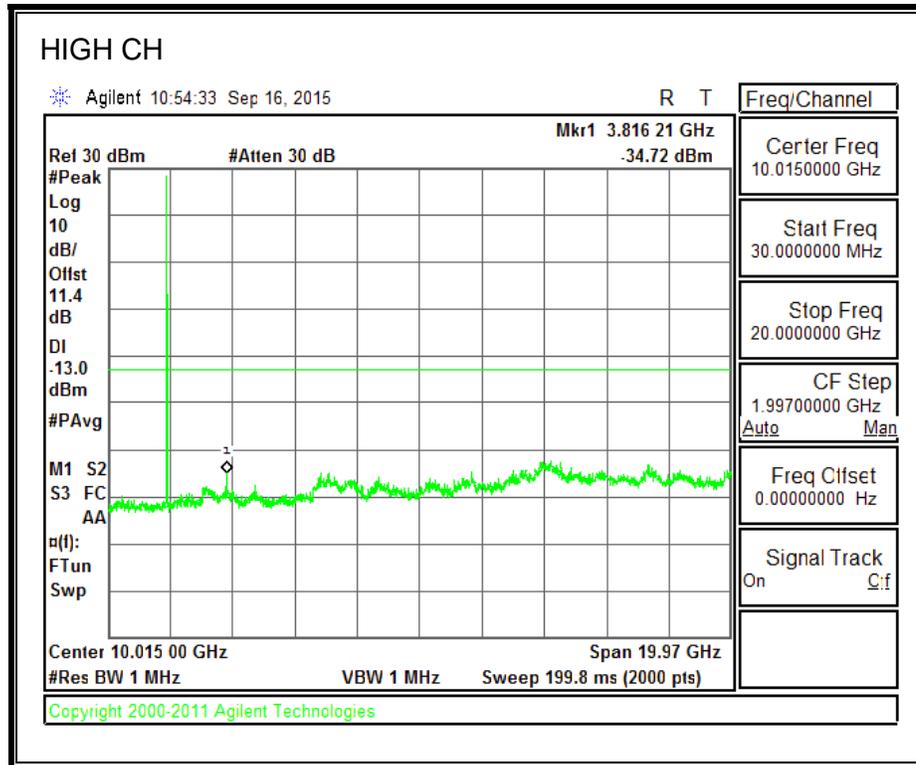



**1700MHz BAND**

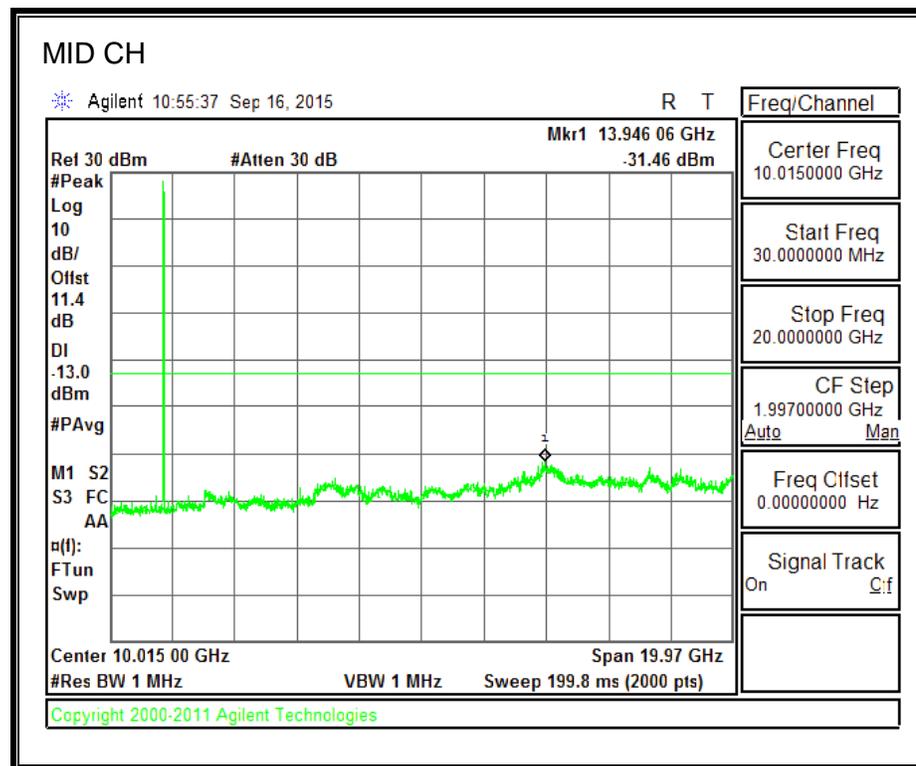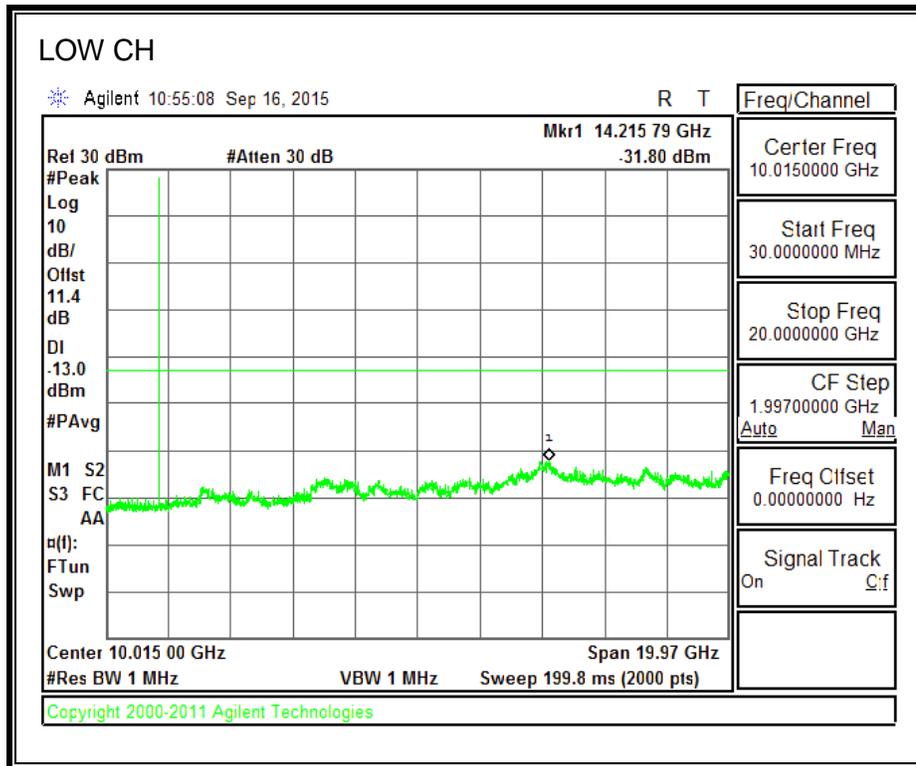

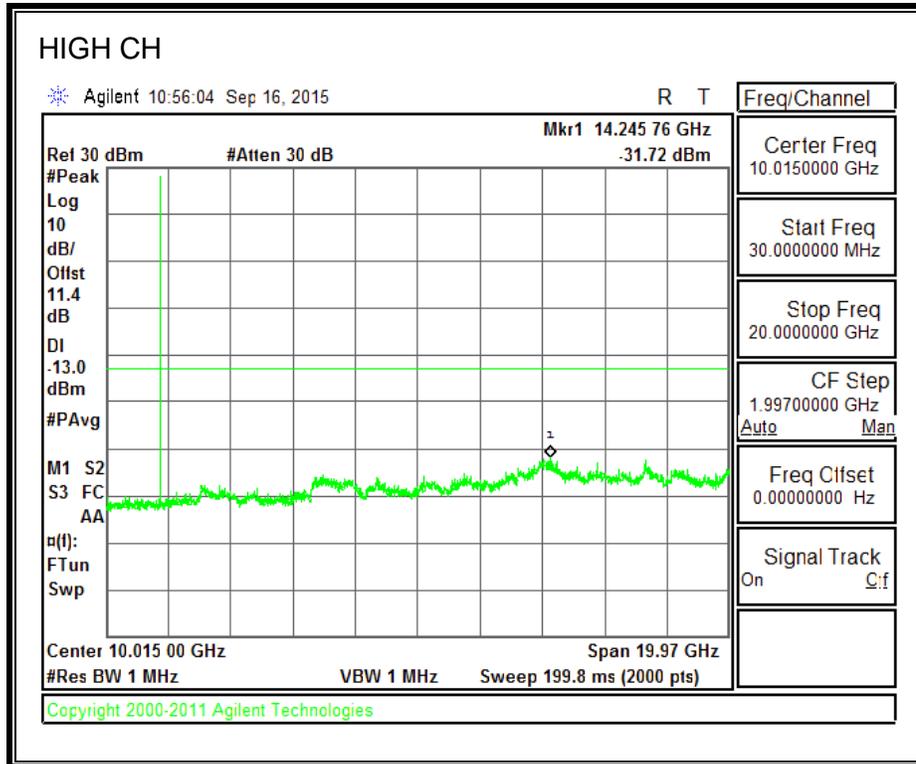



**800MHz SECONDARY BAND**

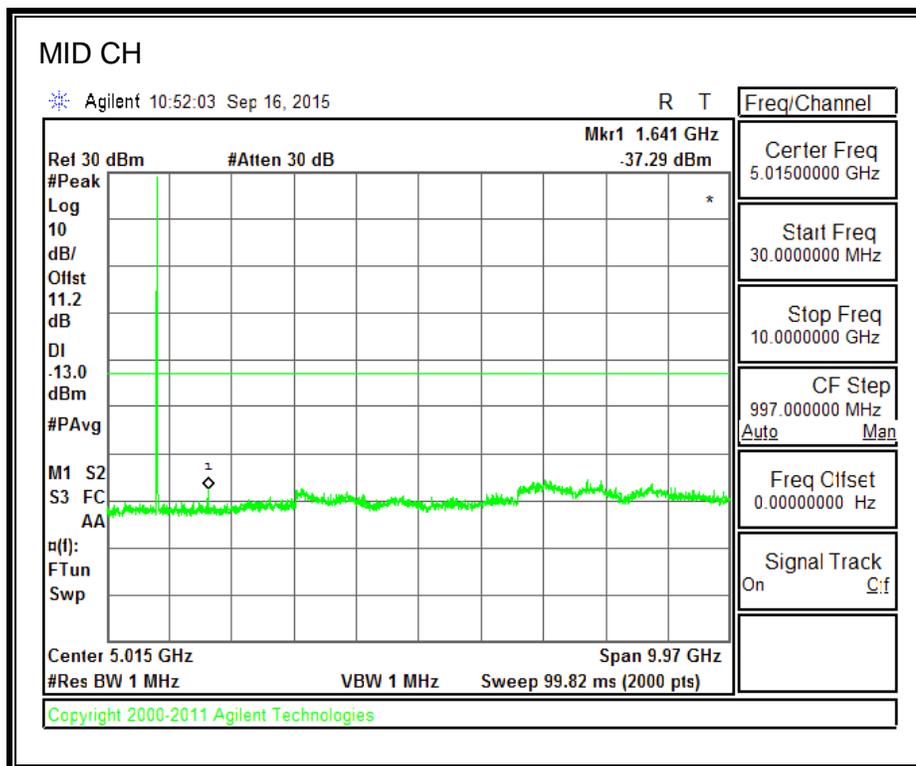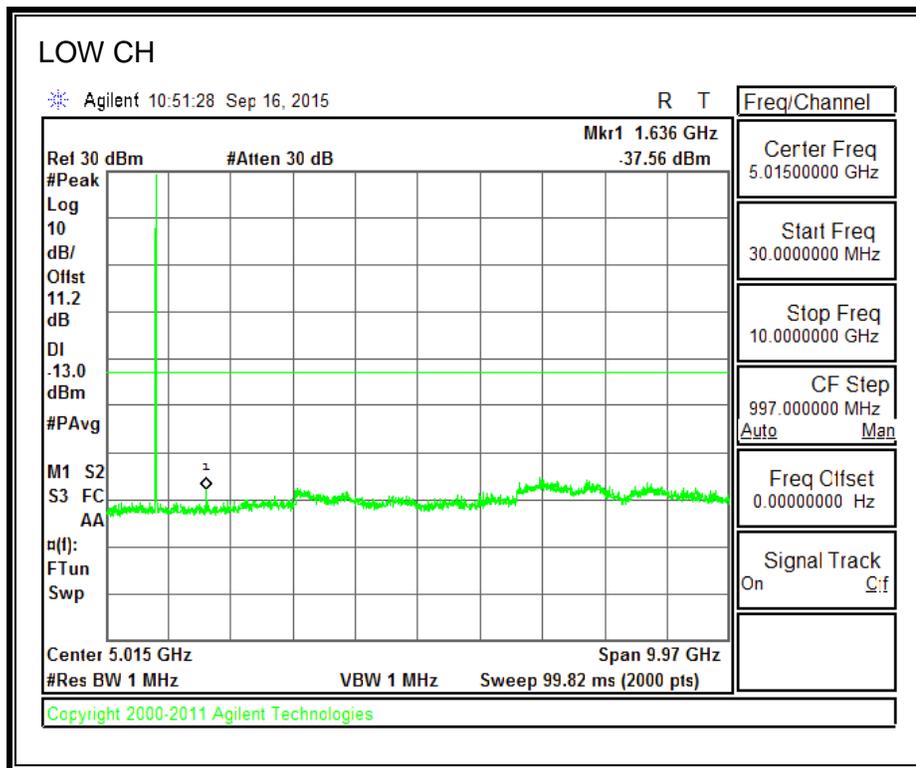


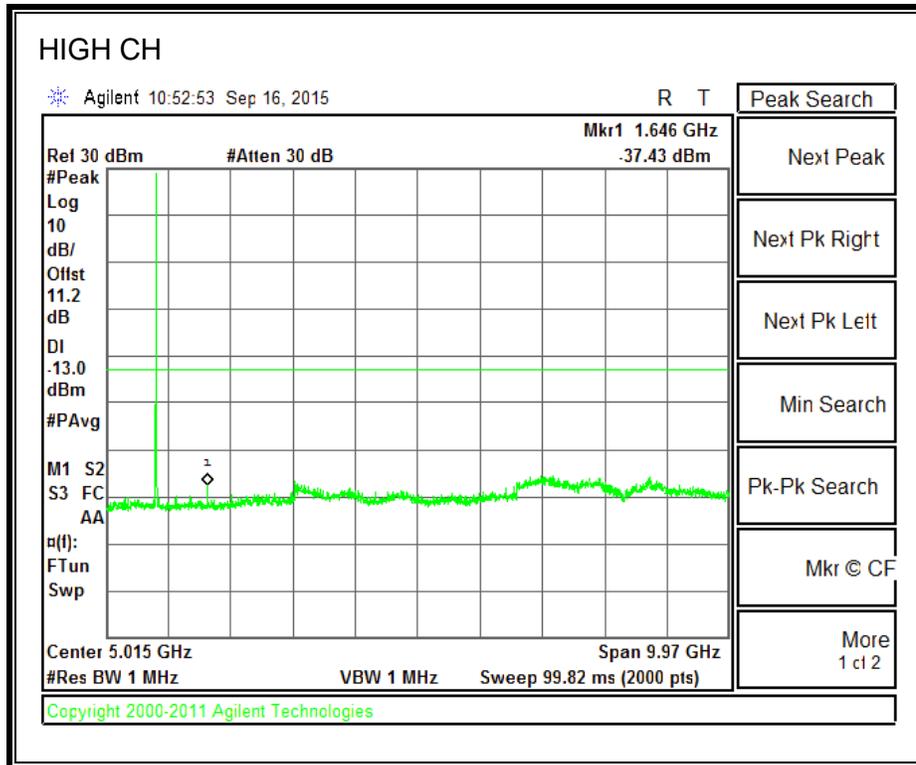



### 8.3.5. UMTS REL 99


#### 850MHz BAND

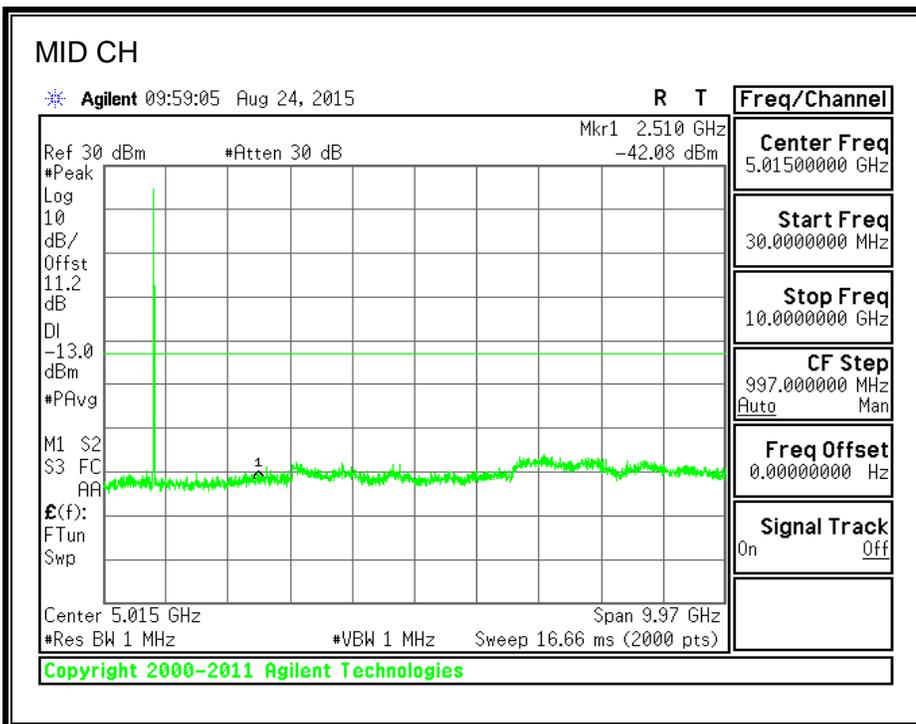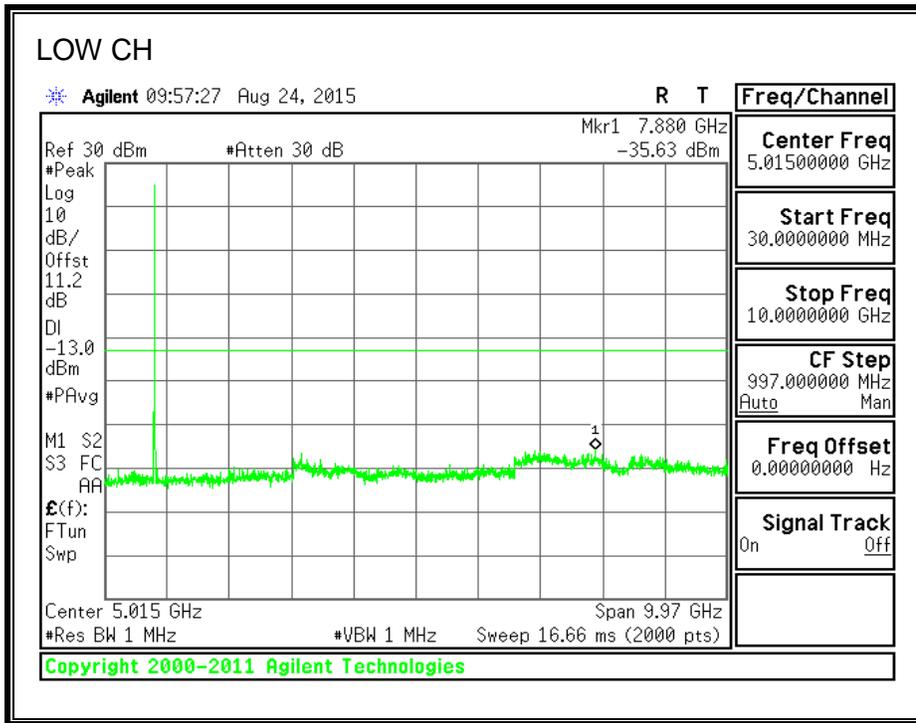


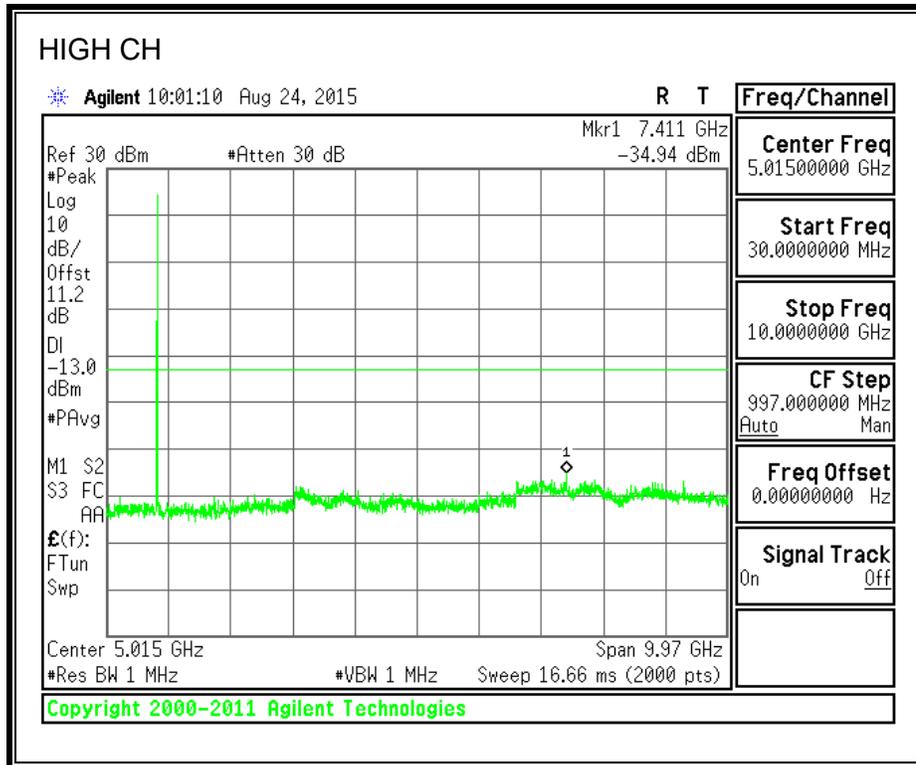



**1900MHz BAND**

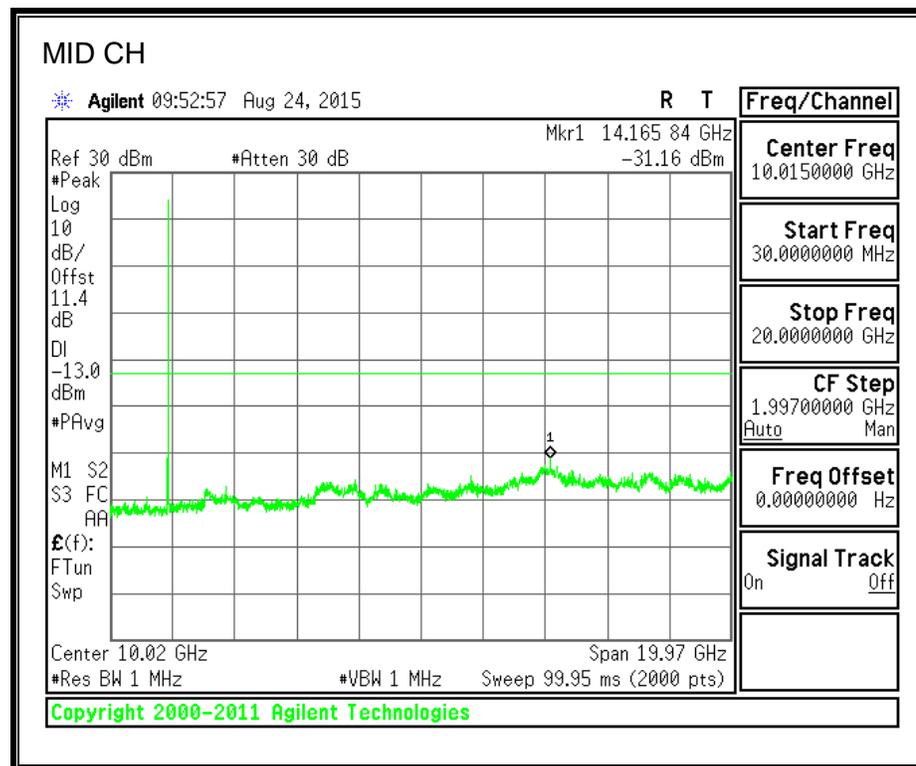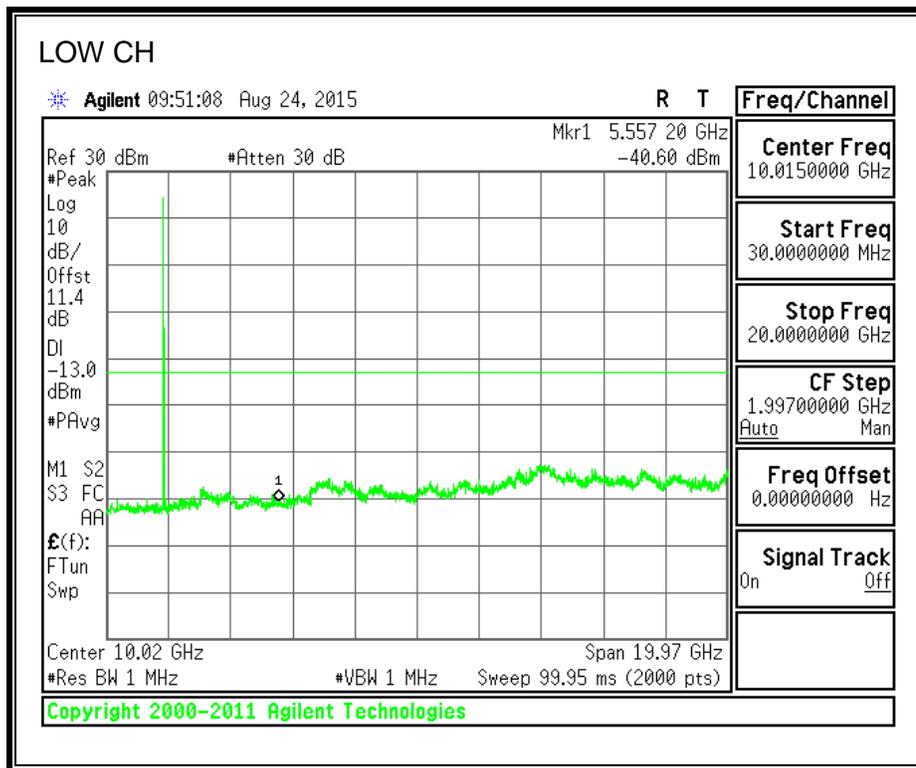

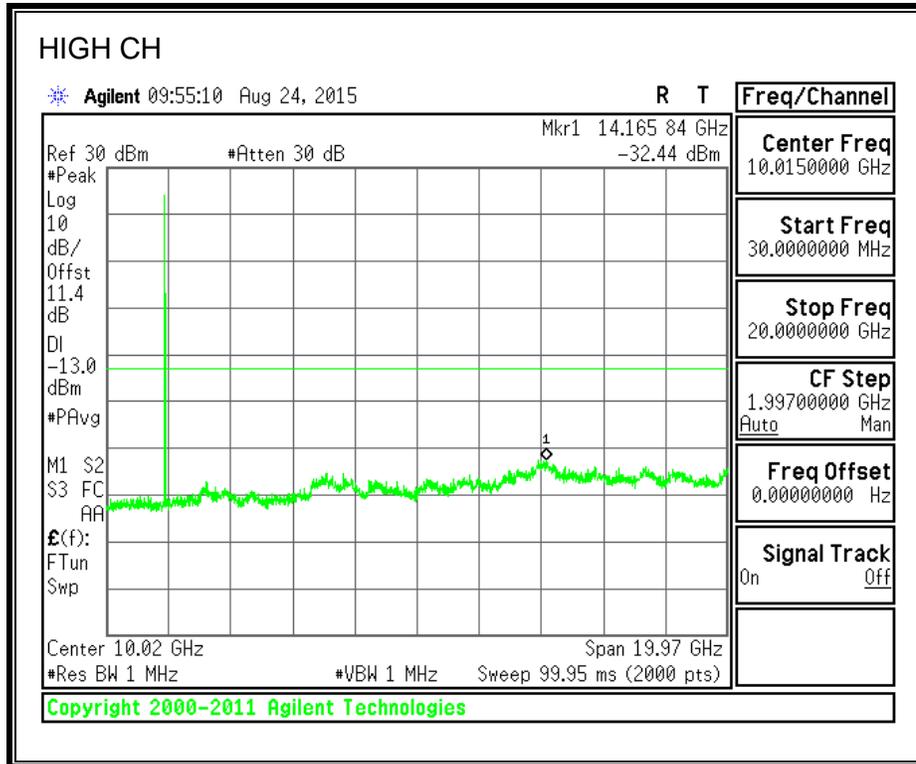



**1700MHz BAND**

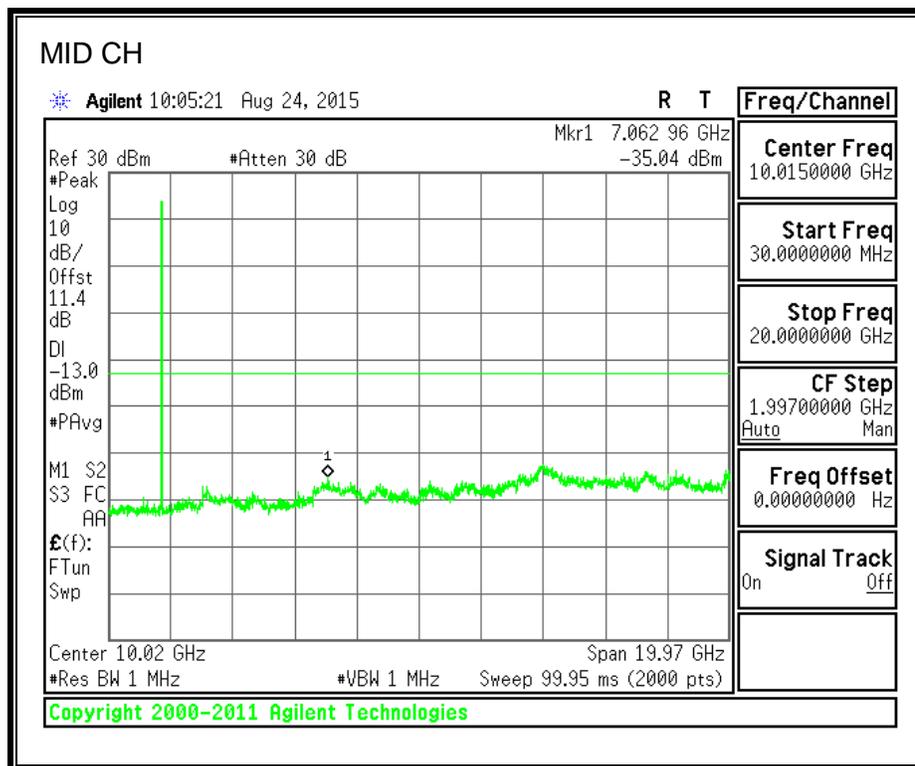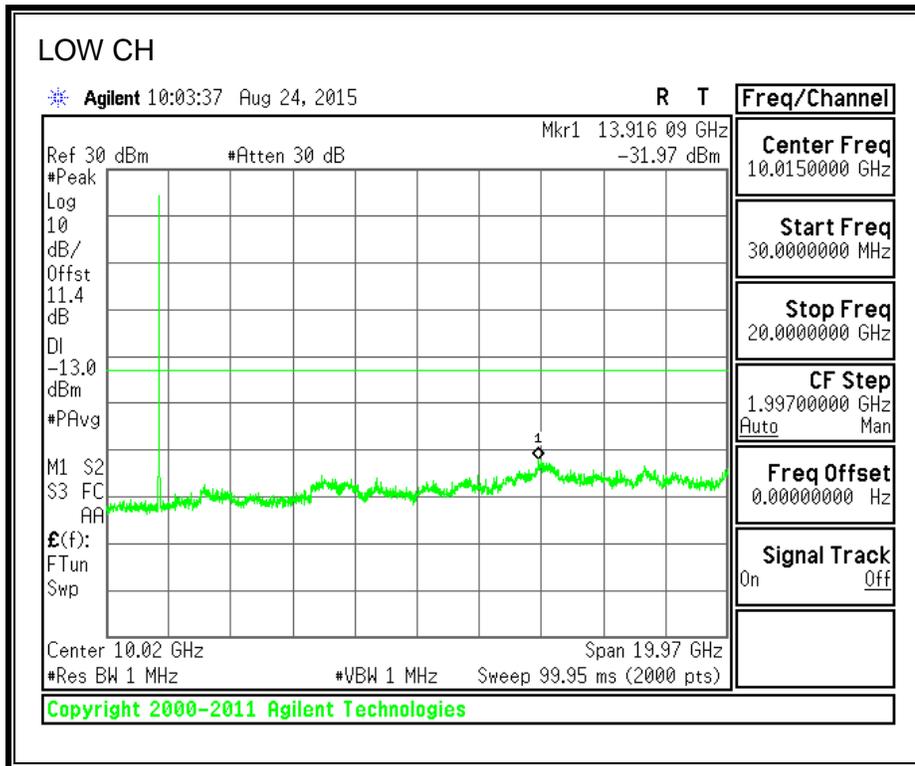


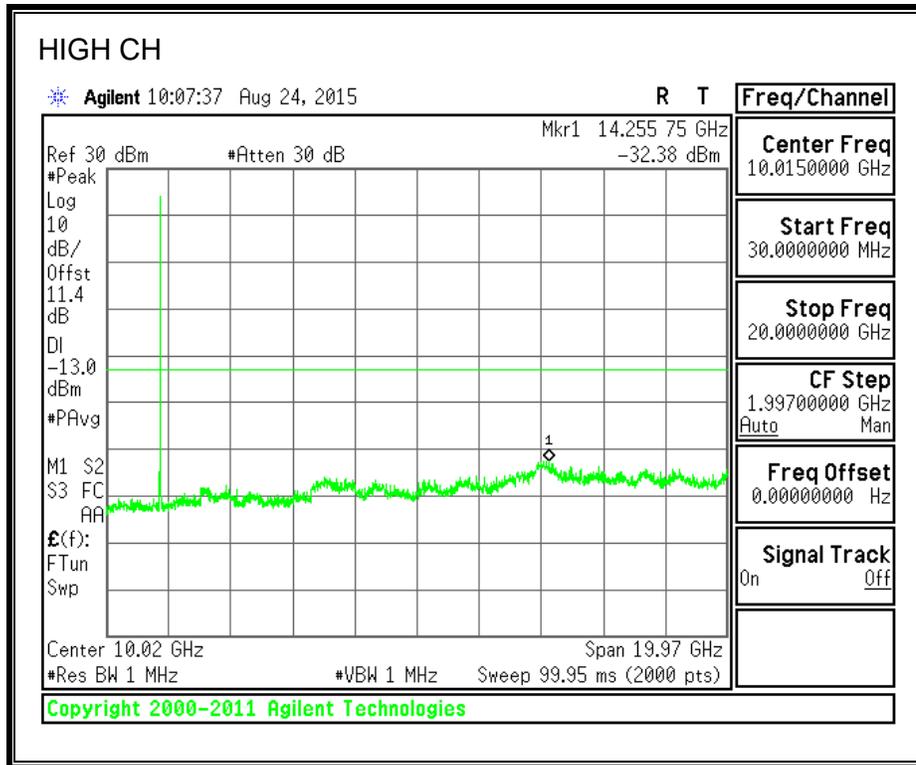



### 8.3.6. UMTS HSDPA


#### 850MHz BAND

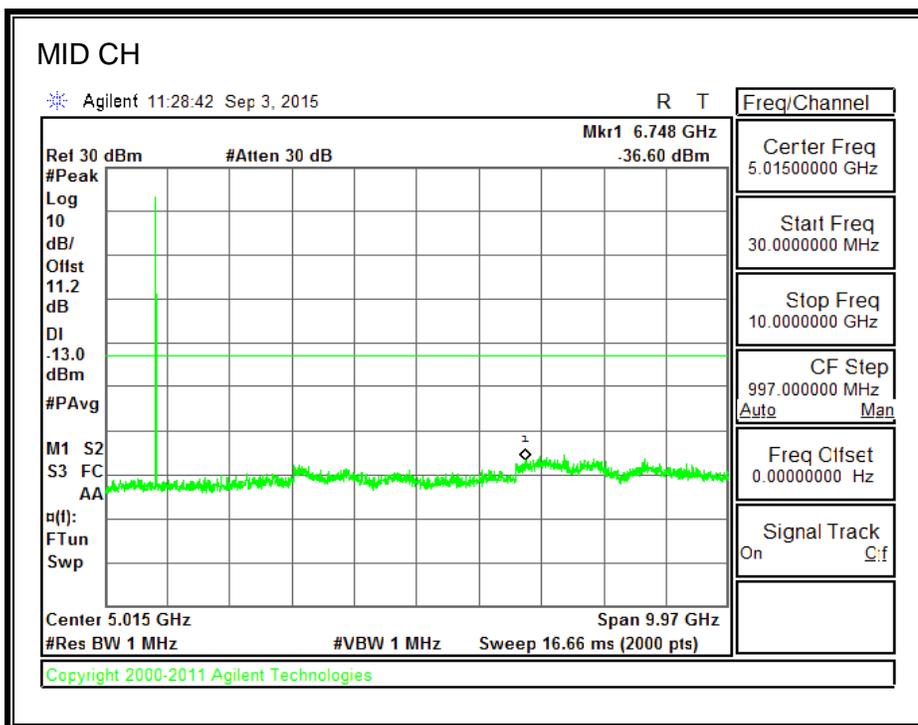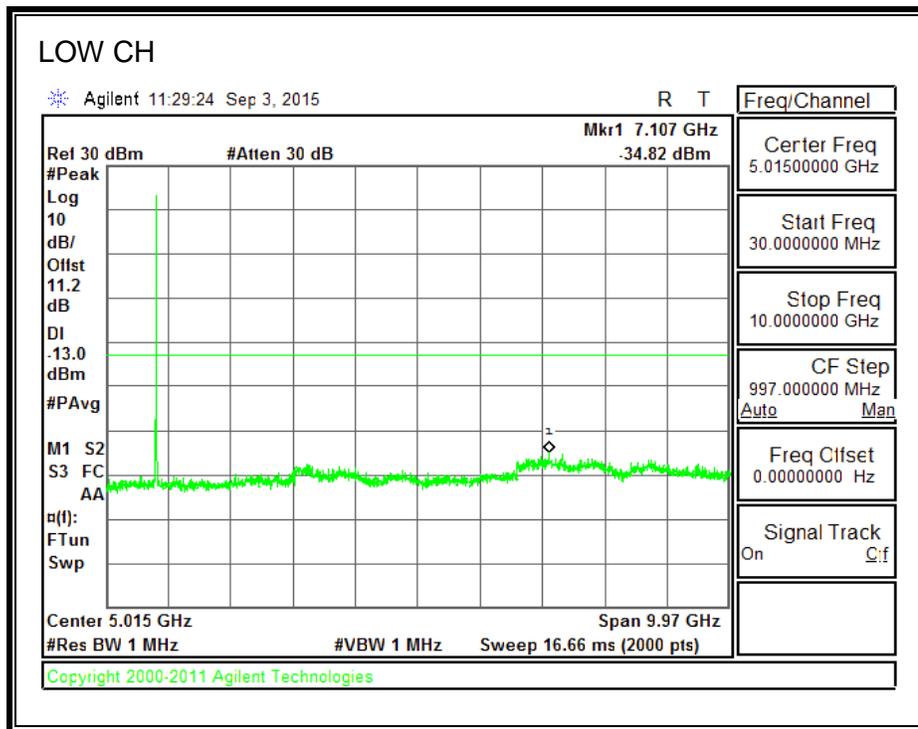


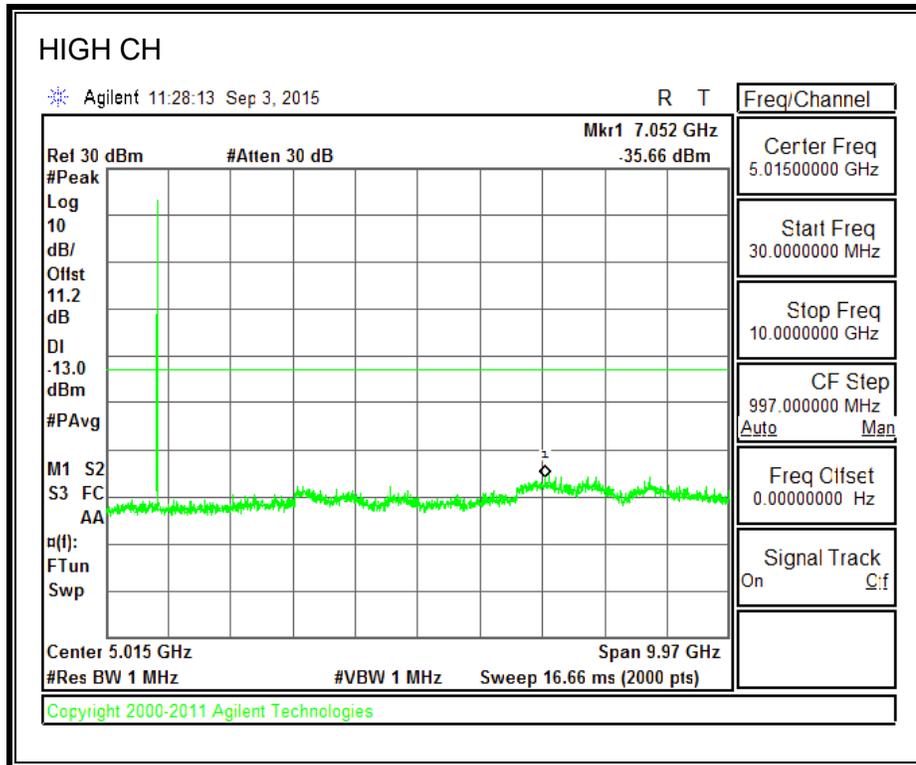



**1900MHz BAND**

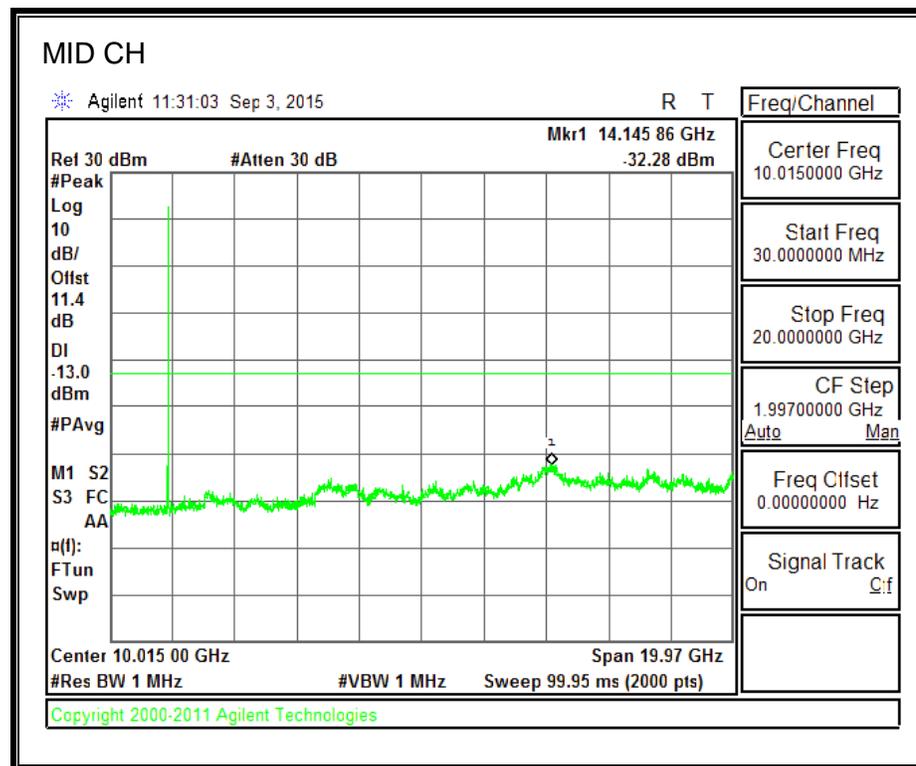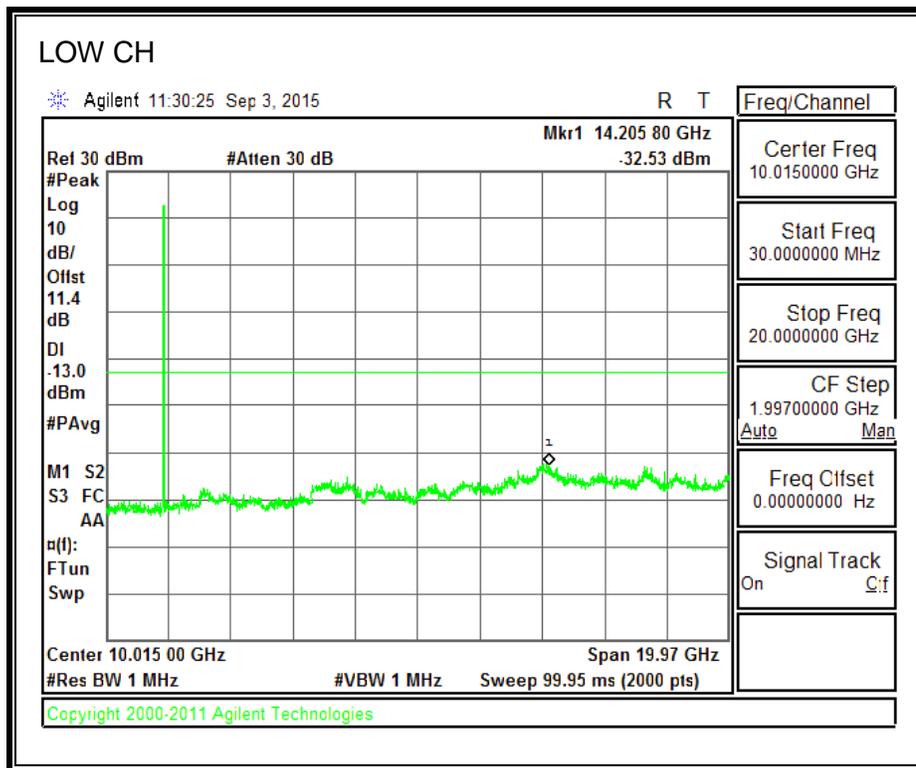

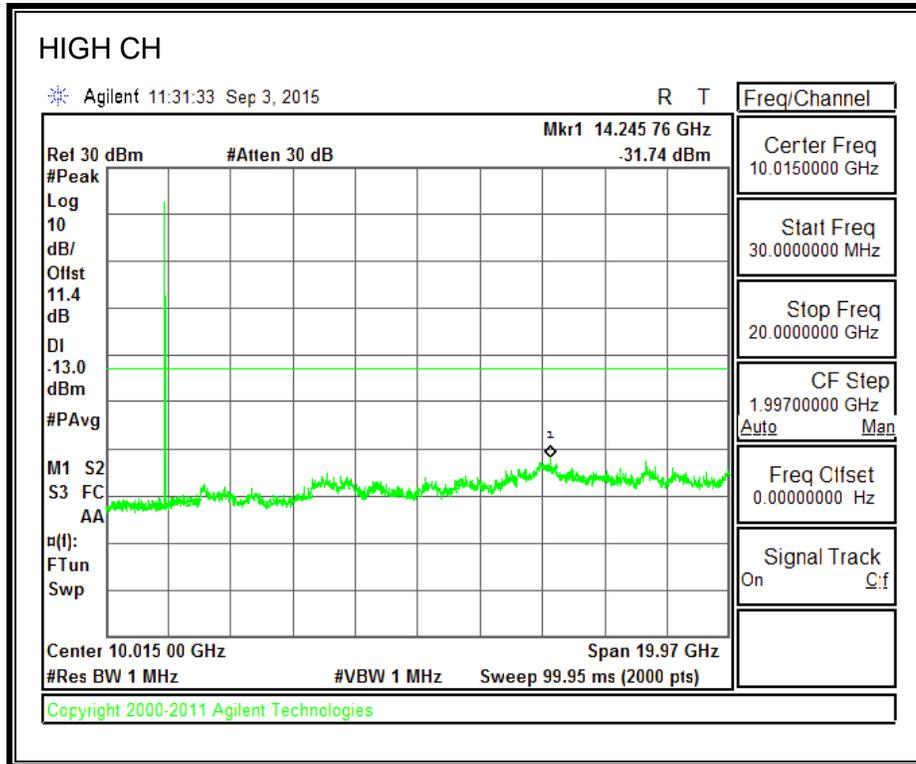

**1700MHz BAND**

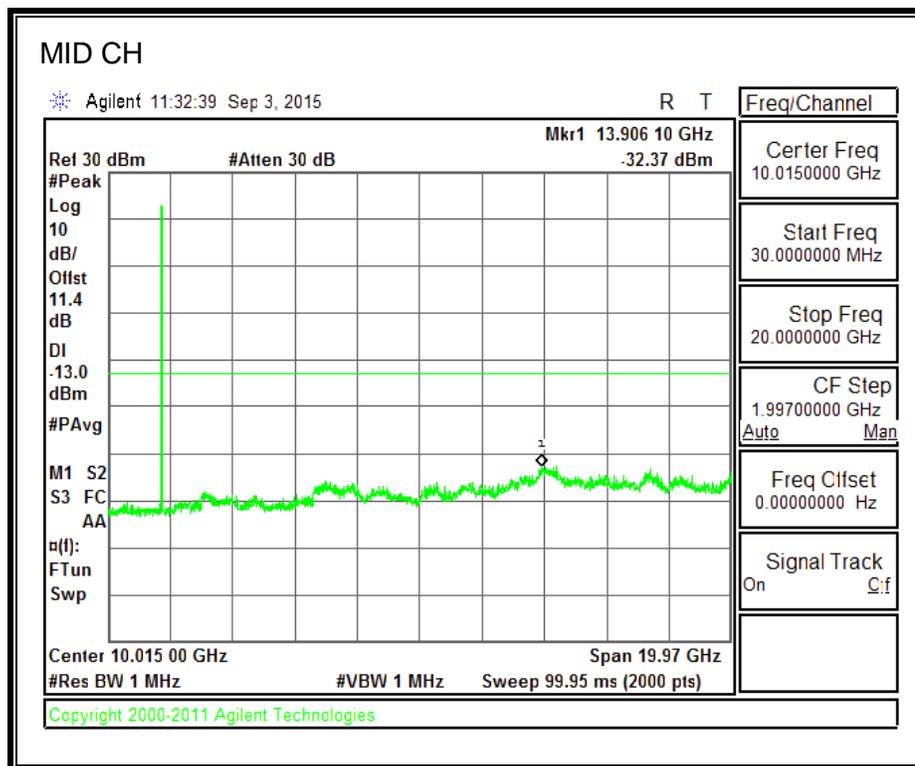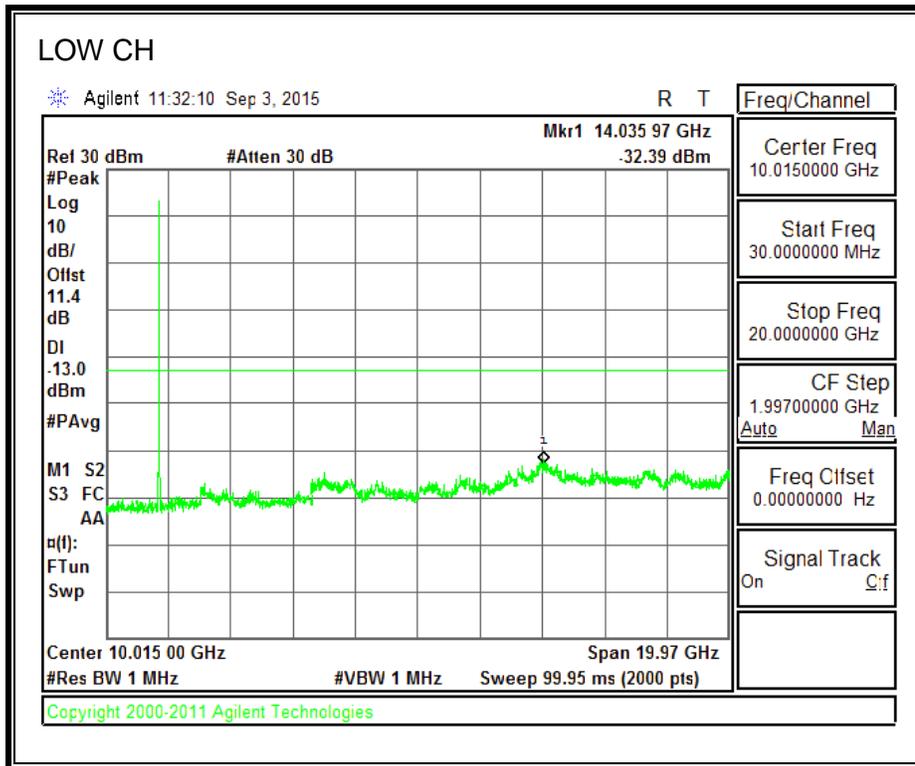

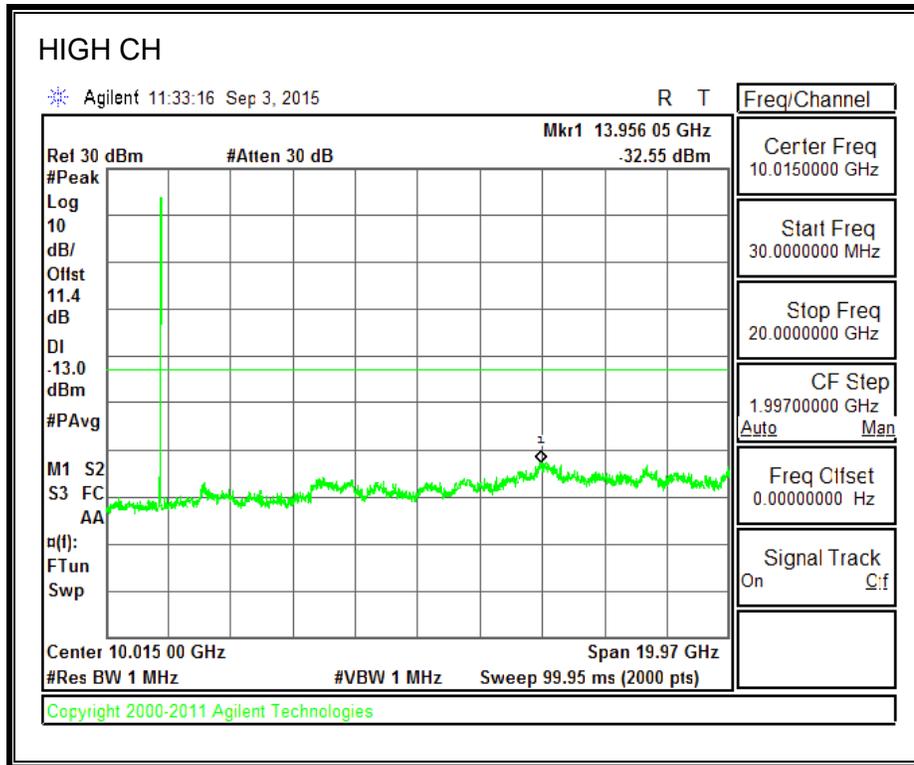

## 9. FREQUENCY STABILITY

### RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54.and §90.213

### LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations.

§24.235 & §27.54 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§90.213 - The carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations

### TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. =  $-30^{\circ}$  to  $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)

#### **Frequency Stability vs Temperature:**

The EUT is place inside a temperature chamber. The temperature is set to  $20^{\circ}\text{C}$  and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until  $+50^{\circ}\text{C}$  is reached.

#### **Frequency Stability vs Voltage:**

The peak frequency error is recorded (worst-case).

### RESULTS

See the following pages.

## 9.1. GSM

### GPRS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0186	848.9756		
Extreme (50C)		824.0186	848.9757	32.8	0.04
Extreme (40C)		824.0186	848.9757	33.5	0.04
Extreme (30C)		824.0186	848.9757	32.5	0.04
Extreme (10C)		824.0186	848.9756	21.3	0.03
Extreme (0C)		824.0186	848.9756	18.6	0.02
Extreme (-10C)		824.0186	848.9756	20.1	0.02
Extreme (-20C)		824.0186	848.9756	21.6	0.03
Extreme (-30C)		824.0186	848.9756	22.5	0.03
25C	10%	824.0186	848.9756	-13.2	-0.02
	-10%	824.0186	848.9756	-19.3	-0.02
	End Point	824.0186	848.9756	-15.5	-0.02

### EGPRS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0334	848.9671		
Extreme (50C)		824.0334	848.9672	30.7	0.04
Extreme (40C)		824.0334	848.9672	31.7	0.04
Extreme (30C)		824.0334	848.9672	37.3	0.04
Extreme (10C)		824.0334	848.9672	23.4	0.03
Extreme (0C)		824.0334	848.9672	23.3	0.03
Extreme (-10C)		824.0334	848.9672	24.9	0.03
Extreme (-20C)		824.0334	848.9672	24.0	0.03
Extreme (-30C)		824.0334	848.9672	24.1	0.03
25C	10%	824.0334	848.9672	18.7	0.02
	-10%	824.0334	848.9672	13.3	0.02
	End Point	824.0334	848.9672	16.3	0.02

**GPRS 1900**

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0363	1909.9732		
Extreme (50C)		1850.0363	1909.9732	61.5	0.03
Extreme (40C)		1850.0363	1909.9732	59.3	0.03
Extreme (30C)		1850.0363	1909.9732	62.9	0.03
Extreme (10C)		1850.0363	1909.9732	60.5	0.03
Extreme (0C)		1850.0363	1909.9732	55.1	0.03
Extreme (-10C)		1850.0363	1909.9732	59.8	0.03
Extreme (-20C)		1850.0363	1909.9732	55.1	0.03
Extreme (-30C)		1850.0363	1909.9732	63.2	0.03
25C	10%	1850.0363	1909.9732	18.2	0.01
	-10%	1850.0363	1909.9732	18.2	0.01
	End Point	1850.0363	1909.9732	20.1	0.01

**EGPRS 1900**

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0864	1909.9553		
Extreme (50C)		1850.0865	1909.9554	61.8	0.03
Extreme (40C)		1850.0865	1909.9554	65.6	0.03
Extreme (30C)		1850.0865	1909.9554	63.2	0.03
Extreme (10C)		1850.0865	1909.9554	65.7	0.03
Extreme (0C)		1850.0865	1909.9553	57.4	0.03
Extreme (-10C)		1850.0865	1909.9554	62.5	0.03
Extreme (-20C)		1850.0865	1909.9554	64.1	0.03
Extreme (-30C)		1850.0865	1909.9554	70.0	0.04
25C	10%	1850.0864	1909.9553	14.1	0.01
	-10%	1850.0864	1909.9553	13.3	0.01
	End Point	1850.0865	1909.9553	15.5	0.01

## 9.2. CDMA2000

### CDMA 1xRTT BC0

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0085	848.9924		
Extreme (50C)		824.0085	848.9923	-15.9	-0.02
Extreme (40C)		824.0085	848.9923	-14.9	-0.02
Extreme (30C)		824.0085	848.9923	-15.2	-0.02
Extreme (10C)		824.0085	848.9923	-16.2	-0.02
Extreme (0C)		824.0085	848.9923	-17.5	-0.02
Extreme (-10C)		824.0085	848.9923	-17.0	-0.02
Extreme (-20C)		824.0085	848.9923	-18.3	-0.02
Extreme (-30C)		824.0085	848.9923	-16.8	-0.02
25C		10%	824.0085	848.9923	-19.0
	-10%	824.0085	848.9923	-19.2	-0.02
	End Point	824.0085	848.9923	-18.4	-0.02

### CDMA 1x RTT BC1

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.5602	1909.4398		
Extreme (50C)		1850.5602	1909.4398	-12.2	-0.01
Extreme (40C)		1850.5602	1909.4398	-15.0	-0.01
Extreme (30C)		1850.5602	1909.4398	-14.8	-0.01
Extreme (10C)		1850.5602	1909.4398	-15.2	-0.01
Extreme (0C)		1850.5602	1909.4398	-14.1	-0.01
Extreme (-10C)		1850.5602	1909.4398	-13.2	-0.01
Extreme (-20C)		1850.5602	1909.4398	-12.5	-0.01
Extreme (-30C)		1850.5602	1909.4398	-11.0	-0.01
25C		10%	1850.5602	1909.4398	-8.5
	-10%	1850.5602	1909.4398	-7.2	0.00
	End Point	1850.5602	1909.4398	-9.6	-0.01

**CDMA 1xRTT BC15**

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1710.5590	1754.4445		
Extreme (50C)		1710.5590	1754.4445	-11.1	-0.01
Extreme (40C)		1710.5590	1754.4445	-11.0	-0.01
Extreme (30C)		1710.5590	1754.4445	-10.9	-0.01
Extreme (10C)		1710.5590	1754.4445	-12.4	-0.01
Extreme (0C)		1710.5590	1754.4445	-13.5	-0.01
Extreme (-10C)		1710.5590	1754.4445	-12.8	-0.01
Extreme (-20C)		1710.5590	1754.4445	-11.9	-0.01
Extreme (-30C)		1710.5590	1754.4445	-10.7	-0.01
25C		10%	1710.5590	1754.4445	-11.0
	-10%	1710.5590	1754.4445	-9.9	-0.01
	End Point	1710.5590	1754.4445	-12.3	-0.01

**CDMA 1xRTT BC10**

Limit		816.35	823.65	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	816.5556	823.4448		
Extreme (50C)		816.5556	823.4448	-15.2	-0.02
Extreme (40C)		816.5556	823.4448	-14.6	-0.02
Extreme (30C)		816.5556	823.4448	-14.0	-0.02
Extreme (10C)		816.5556	823.4448	-12.1	-0.01
Extreme (0C)		816.5556	823.4448	-13.6	-0.02
Extreme (-10C)		816.5556	823.4448	-15.4	-0.02
Extreme (-20C)		816.5556	823.4448	-11.2	-0.01
Extreme (-30C)		816.5556	823.4448	-10.7	-0.01
25C		10%	816.5556	823.4448	-16.3
	-10%	816.5556	823.4448	-15.5	-0.02
	End Point	816.5556	823.4448	-15.6	-0.02

### 9.3. UMTS

#### UMTS REL99 BAND 5

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.1321	848.8693		
Extreme (50C)		824.1321	848.8693	3.8	0.00
Extreme (40C)		824.1321	848.8693	2.8	0.00
Extreme (30C)		824.1321	848.8693	4.2	0.01
Extreme (10C)		824.1321	848.8693	5.3	0.01
Extreme (0C)		824.1321	848.8693	-2.0	0.00
Extreme (-10C)		824.1321	848.8693	-0.2	0.00
Extreme (-20C)		824.1321	848.8693	-1.2	0.00
Extreme (-30C)		824.1321	848.8693	-2.1	0.00
25C	10%	824.1321	848.8693	-5.3	-0.01
	-10%	824.1321	848.8693	-6.1	-0.01
	End Point	824.1321	848.8693	-4.7	-0.01

#### UMTS REL99 BAND 2

Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage				
Normal (25C)	Normal	1850.1316	1909.8656		
Extreme (50C)		1850.1316	1909.8656	4.9	0.00
Extreme (40C)		1850.1316	1909.8656	3.8	0.00
Extreme (30C)		1850.1316	1909.8656	4.1	0.00
Extreme (10C)		1850.1316	1909.8656	4.3	0.00
Extreme (0C)		1850.1316	1909.8656	7.2	0.00
Extreme (-10C)		1850.1316	1909.8656	-6.6	0.00
Extreme (-20C)		1850.1316	1909.8656	-6.8	0.00
Extreme (-30C)		1850.1316	1909.8656	-7.1	0.00
25C	10%	1850.1316	1909.8656	-8.2	0.00
	-10%	1850.1316	1909.8656	-7.6	0.00
	End Point	1850.1316	1909.8656	-6.6	0.00

**UMTS REL99 BAND 4**

Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage				
Normal (25C)	Normal	1710.1346	1754.8682		
Extreme (50C)		1710.1346	1754.8682	12.2	0.01
Extreme (40C)		1710.1346	1754.8682	13.2	0.01
Extreme (30C)		1710.1346	1754.8682	11.9	0.01
Extreme (10C)		1710.1346	1754.8682	11.9	0.01
Extreme (0C)		1710.1346	1754.8682	-11.2	-0.01
Extreme (-10C)		1710.1346	1754.8682	-20.8	-0.01
Extreme (-20C)		1710.1345	1754.8681	-34.1	-0.02
Extreme (-30C)		1710.1345	1754.8681	-33.2	-0.02
25C	10%	1710.1346	1754.8682	-12.0	-0.01
	-10%	1710.1346	1754.8682	-13.0	-0.01
	End Point	1710.1346	1754.8682	-10.6	-0.01

## 10. RADIATED TEST RESULTS

### 10.1. RADIATED POWER (ERP & EIRP) (LAT)

#### RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50 and §90.635

#### LIMITS

§22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

§24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

§27.50(d) (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to 1 watt EIRP. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in this band must employ a means for limiting power to the minimum necessary for successful communications

§90.635 Limitations on power and antenna height.

(a) The effective radiated power and antenna height for base stations may not exceed 1 kilowatt (30 dBw) and 304 m. (1,000 ft.) above average terrain (AAT), respectively, or the equivalent thereof as determined from the Table. These are maximum values, and applicants will be required to justify power levels and antenna heights requested.

(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

Table—Equivalent Power and Antenna Heights for Base Stations in the 851–869 MHz and 935–940 MHz Bands Which Have a Requirement for a 32 km (20 mi) Service Area Radius

Antenna height (ATT) meters (feet)	Effective radiated power (watts) <sup>1,2,4</sup>
Above 1,372 (4,500)	65
Above 1,220 (4,000) to 1,372 (4,500)	70
Above 1,067 (3,500) to 1,220 (4,000)	75
Above 915 (3,000) to 1,067 (3,500)	100
Above 763 (2,500) to 915 (3,000)	140
Above 610 (2,000) to 763 (2,500)	200
Above 458 (1,500) to 610 (2,000)	350
Above 305 (1,000) to 458 (1,500)	600
Up to 305 (1,000)	31,000

1 Power is given in terms of effective radiated power (ERP).

2 Applicants in the Los Angeles, CA, area who demonstrate a need to serve both the downtown and fringe areas will be permitted to utilize an ERP of 1 kw at the following mountaintop sites: Santiago Park, Sierra Peak, Mount Lukens, and Mount Wilson.

3 Stations with antennas below 305 m (1,000 ft) (AAT) will be restricted to a maximum power of 1 kw (ERP).

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

### **TEST PROCEDURE**

ANSI / TIA / EIA 603-D Clause 2.2.17

KDB 971168 D01 RF Power output using broadband peak and average power meter method

### **MODES TESTED**

- GPRS/EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, 1xRTT and EVDO, Rev A

### **RESULTS**

**10.1.1. GSM**

**Part 22 850MHz Band**

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	29.78	950.60
		190	836.6	<b>30.11</b>	1025.65
		251	848.8	30.04	1009.25
	EGPRS	128	824.2	24.17	261.22
		190	836.6	<b>24.43</b>	277.33
		251	848.8	24.34	271.64

**Part 24 1900MHz Band**

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	GPRS	512	1850.2	30.91	1233.10
		661	1880.0	<b>31.11</b>	1291.22
		810	1909.8	30.88	1224.62
	EGPRS	512	1850.2	<b>28.10</b>	645.65
		661	1880.0	27.71	590.20
		810	1909.8	27.98	628.06

**10.1.2. CDMA2000**

**Part 90 800MHz Band**

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	450	817.3	20.73	118.30
		560	820.0	<b>20.85</b>	121.62
		670	822.8	20.52	112.72
	BC10, EVDO A	450	817.3	20.42	110.15
		560	820.0	<b>20.59</b>	114.55
		670	822.8	20.41	109.90

**Part 22 850MHz Band**

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	21.11	129.12
		384	836.5	21.15	130.32
		777	848.3	<b>21.18</b>	131.22
	BC 0, EVDO Rev A	1013	824.7	21.06	127.64
		384	836.5	21.11	129.12
		777	848.3	<b>21.16</b>	130.62

**Part 24 1900MHz Band**

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	23.75	237.14
		600	1880.0	23.59	228.56
		1175	1908.8	<b>23.83</b>	241.55
	BC1, EVDO REV A	25	1851.3	23.79	239.33
		600	1880.0	23.54	225.94
		1175	1908.8	<b>23.85</b>	242.66

**Part 27 / RSS 139 1700MHz Band**

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
AWS	BC15, 1xRTT	25	1711.3	22.01	158.85
		450	1732.5	<b>22.40</b>	173.78
		875	1753.8	22.22	166.72
	BC15, EVDO, REV A	25	1711.3	21.97	157.40
		450	1732.5	<b>22.37</b>	172.58
		875	1753.8	22.17	164.82

### 10.1.3. UMTS

#### Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4132	826.4	22.11	162.55
		4183	836.6	22.25	167.88
		4233	846.6	<b>22.38</b>	172.98
	UMTS, HSDPA	4132	826.4	21.21	132.13
		4183	836.6	21.20	131.83
		4233	846.6	<b>21.28</b>	134.28

#### Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	23.69	233.88
		9800	1880.0	23.61	229.61
		9938	1907.6	<b>23.73</b>	236.05
	UMTS, HSDPA	9662	1852.4	22.73	187.50
		9800	1880.0	22.66	184.50
		9938	1907.6	<b>22.77</b>	189.23

#### Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
AWS	UMTS,REL 99	1537	1712.4	23.33	215.28
		1638	1732.6	23.52	224.91
		1738	1752.5	<b>23.61</b>	229.61
	UMTS, HSDPA	1537	1712.4	22.45	175.79
		1638	1732.6	22.66	184.50
		1738	1752.5	<b>22.73</b>	187.50

**10.1.4. GSM**

**GPRS, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 12/14/15										
<b>Test Engineer:</b> T Wang										
<b>Configuration:</b> EUT only										
<b>Mode:</b> GSM 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T900, and Chamber H Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	22.9	V	0.6	0.0	22.23	24.38	38.45	40.60	-16.2	
824.20	30.4	H	0.6	0.0	29.78	31.93	38.45	40.60	-8.7	
Mid Ch										
836.60	23.3	V	0.6	0.0	22.68	24.83	38.45	40.60	-15.8	
836.60	30.7	H	0.6	0.0	30.11	32.26	38.45	40.60	-8.3	
High Ch										
848.80	23.5	V	0.6	0.0	22.88	25.03	38.45	40.60	-15.6	
848.80	30.7	H	0.6	0.0	30.04	32.19	38.45	40.60	-8.4	
Rev. 06.18.14										

**EGPRS, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 12/14/15										
<b>Test Engineer:</b> T Wang										
<b>Configuration:</b> EUT only										
<b>Mode:</b> EDGE 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunoi T900, and Chamber H Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	20.2	V	0.6	0.0	19.53	21.68	38.45	40.60	-18.9	
824.20	24.8	H	0.6	0.0	24.17	26.32	38.45	40.60	-14.3	
Mid Ch										
836.60	20.3	V	0.6	0.0	19.64	21.79	38.45	40.60	-18.8	
836.60	25.1	H	0.6	0.0	24.43	26.58	38.45	40.60	-14.0	
High Ch										
848.80	20.4	V	0.6	0.0	19.78	21.93	38.45	40.60	-18.7	
848.80	25.0	H	0.6	0.0	24.34	26.49	38.45	40.60	-14.1	
Rev. 06.18.14										

**GPRS, 1900MHz BAND 2**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/14/15								
<b>Test Engineer:</b> T Wang								
<b>Configuration:</b> EUT only								
<b>Mode:</b> GSM 1900MHz								
<b>Test Equipment:</b>								
Receiving: Horn T863 and Chamber H SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	22.5	V	0.98	8.05	29.58	33.0	-3.4	
1.851	23.8	H	0.98	8.05	30.91	33.0	-2.1	
Mid Ch								
1.880	22.6	V	0.98	8.03	29.63	33.0	-3.4	
1.880	24.1	H	0.98	8.03	31.11	33.0	-1.9	
High Ch								
1.910	22.3	V	0.98	8.05	29.38	33.0	-3.6	
1.910	23.8	H	0.98	8.05	30.88	33.0	-2.1	
Rev. 06.18.14								

**EGPRS, 1900MHz BAND 2**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/14/15								
<b>Test Engineer:</b> T Wang								
<b>Configuration:</b> EUT only								
<b>Mode:</b> EDGE 1900MHz								
<b>Test Equipment:</b>								
Receiving: Horn T863 and Chamber H SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	19.9	V	0.98	8.05	26.98	33.0	-6.0	
1.851	21.0	H	0.98	8.05	28.10	33.0	-4.9	
Mid Ch								
1.880	19.3	V	0.98	8.03	26.33	33.0	-6.7	
1.880	20.7	H	0.98	8.03	27.71	33.0	-5.3	
High Ch								
1.910	19.7	V	0.98	8.05	26.78	33.0	-6.2	
1.910	20.9	H	0.98	8.05	27.98	33.0	-5.0	
Rev. 06.18.14								

**10.1.5. CDMA2000**

**CDMA2000 1xRTT, 800MHz BC10**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/21/15								
<b>Test Engineer:</b> T Wang								
<b>Configuration:</b> EUT only								
<b>Mode:</b> CDMA 1XRTT 800MHz								
<b>Test Equipment:</b>								
Receiving: Sunol T900, and Chamber H Cable								
Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	21.35	V	0.6	0.0	20.73	50.00	-29.3	
817.25	13.53	H	0.6	0.0	12.91	50.00	-37.1	
Mid Ch								
820.00	21.47	V	0.6	0.0	20.85	50.00	-29.1	
820.00	13.68	H	0.6	0.0	13.06	50.00	-36.9	
High Ch								
822.75	21.14	V	0.6	0.0	20.52	50.00	-29.5	
822.75	13.01	H	0.6	0.0	12.39	50.00	-37.6	
Rev. 05.21.15								

**EVDO-Rev A, 800MHz BC10**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/21/15								
<b>Test Engineer:</b> T Wang								
<b>Configuration:</b> EUT only								
<b>Mode:</b> CDMA Rev A 800MHz								
<b>Test Equipment:</b>								
Receiving: Sunol T900, and Chamber H Cable								
Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	21.04	V	0.6	0.0	20.42	50.00	-29.6	
817.25	13.41	H	0.6	0.0	12.79	50.00	-37.2	
Mid Ch								
820.00	21.21	V	0.6	0.0	20.59	50.00	-29.4	
820.00	13.38	H	0.6	0.0	12.76	50.00	-37.2	
High Ch								
822.75	21.03	V	0.6	0.0	20.41	50.00	-29.6	
822.75	13.12	H	0.6	0.0	12.50	50.00	-37.5	
Rev. 05.21.15								

**CDMA2000 1xRTT, 850MHz BC0**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 12/21/15										
<b>Test Engineer:</b> T Wang										
<b>Configuration:</b> EUT only										
<b>Mode:</b> CDMA 1XRTT 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T900, and Chamber H Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	11.7	V	0.6	0.0	11.03	13.18	38.45	40.60	-27.4	
824.70	21.7	H	0.6	0.0	21.11	23.26	38.45	40.60	-17.3	
Mid Ch										
836.52	11.6	V	0.6	0.0	10.98	13.13	38.45	40.60	-27.5	
836.52	21.8	H	0.6	0.0	21.15	23.30	38.45	40.60	-17.3	
High Ch										
848.31	11.6	V	0.6	0.0	10.98	13.13	38.45	40.60	-27.5	
848.31	21.8	H	0.6	0.0	21.18	23.33	38.45	40.60	-17.3	
Rev. 06.18.14										

**EVDO-Rev A, 850MHz BC0**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 12/21/15										
<b>Test Engineer:</b> T Wang										
<b>Configuration:</b> EUT only										
<b>Mode:</b> CDMA Rev A 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T900, and Chamber H Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	13.5	V	0.6	0.0	12.83	14.98	38.45	40.60	-25.6	
824.70	21.7	H	0.6	0.0	21.06	23.21	38.45	40.60	-17.4	
Mid Ch										
836.52	14.4	V	0.6	0.0	13.78	15.93	38.45	40.60	-24.7	
836.52	21.7	H	0.6	0.0	21.11	23.26	38.45	40.60	-17.3	
High Ch										
848.31	14.3	V	0.6	0.0	13.68	15.83	38.45	40.60	-24.8	
848.31	21.8	H	0.6	0.0	21.16	23.31	38.45	40.60	-17.3	
Rev. 06.18.14										

**CDMA2000 1xRTT, 1900MHz BC1**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 01/05/16								
<b>Test Engineer:</b> T Wang								
<b>Configuration:</b> EUT only								
<b>Mode:</b> CDMA 1XRTT 1900MHz								
<b>Test Equipment:</b>								
Receiving: Horn T862 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	15.6	V	0.98	8.05	22.67	33.0	-10.3	
1.851	16.7	H	0.98	8.05	23.75	33.0	-9.3	
Mid Ch								
1.880	15.0	V	0.98	8.03	22.00	33.0	-11.0	
1.880	16.5	H	0.98	8.03	23.59	33.0	-9.4	
High Ch								
1.909	15.1	V	0.98	8.05	22.16	33.0	-10.8	
1.909	16.8	H	0.98	8.05	23.83	33.0	-9.2	
Rev. 06.18.14								

**EVDO-Rev A, 1900MHz BC1**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 01/05/16								
<b>Test Engineer:</b> T Wang								
<b>Configuration:</b> EUT only								
<b>Mode:</b> CDMA Rev A 1900MHz								
<b>Test Equipment:</b>								
Receiving: Horn T862 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	15.4	V	0.98	8.05	22.47	33.0	-10.5	
1.851	16.7	H	0.98	8.05	23.79	33.0	-9.2	
Mid Ch								
1.880	14.9	V	0.98	8.03	21.91	33.0	-11.1	
1.880	16.5	H	0.98	8.03	23.54	33.0	-9.5	
High Ch								
1.909	15.0	V	0.98	8.05	22.09	33.0	-10.9	
1.909	16.8	H	0.98	8.05	23.85	33.0	-9.2	
Rev. 05.21.15								

**CDMA2000 1xRTT, 1700MHz BC15**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 01/05/16								
<b>Test Engineer:</b> T Wang								
<b>Configuration:</b> EUT only								
<b>Mode:</b> CDMA 1XRTT 1700MHz								
<b>Test Equipment:</b>								
Receiving: Horn T862 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	12.2	V	0.95	8.27	19.54	30.0	-10.5	
1.711	14.7	H	0.95	8.27	22.01	30.0	-8.0	
Mid Ch								
1.733	12.7	V	0.95	8.23	19.97	30.0	-10.0	
1.733	15.1	H	0.95	8.23	22.40	30.0	-7.6	
High Ch								
1.754	12.9	V	0.95	8.18	20.11	30.0	-9.9	
1.754	15.0	H	0.95	8.18	22.22	30.0	-7.8	
Rev. 05.21.15								

**EVDO-Rev A, 1700MHz BC15**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 01/05/16								
<b>Test Engineer:</b> T Wang								
<b>Configuration:</b> EUT only								
<b>Mode:</b> CDMA Rev A 1700MHz								
<b>Test Equipment:</b>								
Receiving: Horn T862 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	12.0	V	0.95	8.27	19.35	30.0	-10.6	
1.711	14.7	H	0.95	8.27	21.97	30.0	-8.0	
Mid Ch								
1.733	12.6	V	0.95	8.23	19.91	30.0	-10.1	
1.733	15.1	H	0.95	8.23	22.37	30.0	-7.6	
High Ch								
1.754	12.8	V	0.95	8.18	19.98	30.0	-10.0	
1.754	14.9	H	0.95	8.18	22.17	30.0	-7.8	
Rev. 05.21.15								

### 10.1.6. UMTS

#### UMTS REL 99, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 12/14/15										
<b>Test Engineer:</b> T Wang										
<b>Configuration:</b> EUT only										
<b>Mode:</b> WCDMA Rel 99 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T900, and Chamber H Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	15.6	V	0.6	0.0	14.93	17.08	38.45	40.60	-23.5	
826.40	22.7	H	0.6	0.0	22.11	24.26	38.45	40.60	-16.3	
Mid Ch										
836.60	15.7	V	0.6	0.0	15.08	17.23	38.45	40.60	-23.4	
836.60	22.9	H	0.6	0.0	22.25	24.40	38.45	40.60	-16.2	
High Ch										
846.60	15.9	V	0.6	0.0	15.28	17.43	38.45	40.60	-23.2	
846.60	23.0	H	0.6	0.0	22.38	24.53	38.45	40.60	-16.1	
Rev. 05.21.15										

**UMTS HSDPA, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 12/14/15										
<b>Test Engineer:</b> T Wang										
<b>Configuration:</b> EUT only										
<b>Mode:</b> WCDMA HSDPA 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T900, and Chamber H Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	13.7	V	0.6	0.0	13.03	15.18	38.45	40.60	-25.4	
826.40	21.8	H	0.6	0.0	21.21	23.36	38.45	40.60	-17.2	
Mid Ch										
836.60	14.9	V	0.6	0.0	14.28	16.43	38.45	40.60	-24.2	
836.60	21.8	H	0.6	0.0	21.20	23.35	38.45	40.60	-17.2	
High Ch										
846.60	14.7	V	0.6	0.0	14.08	16.23	38.45	40.60	-24.4	
846.60	21.9	H	0.6	0.0	21.28	23.43	38.45	40.60	-17.2	
Rev. 05.21.15										

**UMTS REL 99, 1900MHZ BAND 2**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/14/15								
<b>Test Engineer:</b> T Wang								
<b>Configuration:</b> EUT only								
<b>Mode:</b> WCDMA Rel 99 1900MHz								
<b>Test Equipment:</b>								
Receiving: Horn T863 and Chamber H SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	15.4	V	0.98	8.05	22.45	33.0	-10.6	
1.852	16.6	H	0.98	8.05	23.69	33.0	-9.3	
Mid Ch								
1.880	15.2	V	0.98	8.03	22.29	33.0	-10.7	
1.880	16.6	H	0.98	8.03	23.61	33.0	-9.4	
High Ch								
1.908	15.6	V	0.98	8.04	22.63	33.0	-10.4	
1.908	16.7	H	0.98	8.04	23.73	33.0	-9.3	
Rev. 05.21.15								

**UMTS HSDPA, 1900MHz BAND 2**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/14/15								
<b>Test Engineer:</b> T Wang								
<b>Configuration:</b> EUT only								
<b>Mode:</b> WCDMA HSDPA 1900MHz								
<b>Test Equipment:</b>								
Receiving: Horn T863 and Chamber H SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	14.9	V	0.98	8.05	21.98	33.0	-11.0	
1.852	15.7	H	0.98	8.05	22.73	33.0	-10.3	
Mid Ch								
1.880	14.9	V	0.98	8.03	21.93	33.0	-11.1	
1.880	15.6	H	0.98	8.03	22.66	33.0	-10.3	
High Ch								
1.908	14.7	V	0.98	8.04	21.77	33.0	-11.2	
1.908	15.7	H	0.98	8.04	22.77	33.0	-10.2	
Rev. 05.21.15								

**UMTS REL 99, 1700MHz BAND 4**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/15/15								
<b>Test Engineer:</b> G. Chan								
<b>Configuration:</b> EUT only								
<b>Mode:</b> WCDMA Rel 99 1700MHz								
<b>Test Equipment:</b>								
Receiving: Horn T863 and Chamber H SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.7124	13.4	V	0.95	8.27	20.71	30.0	-9.3	
1.7124	16.0	H	0.95	8.27	23.33	30.0	-6.7	
Mid Ch								
1.7326	14.0	V	0.95	8.23	21.29	30.0	-8.7	
1.7326	16.2	H	0.95	8.23	23.52	30.0	-6.5	
High Ch								
1.7526	14.2	V	0.95	8.18	21.39	30.0	-8.6	
1.7526	16.4	H	0.95	8.18	23.61	30.0	-6.4	
Rev. 05.21.15								

**UMTS HSDPA, 1700MHz BAND 4**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
<b>Company:</b>								
<b>Project #:</b>	15U21635							
<b>Date:</b>	12/15/15							
<b>Test Engineer:</b>	G. Chan							
<b>Configuration:</b>	EUT only							
<b>Mode:</b>	WCDMA HSDPA 1700MHz							
<b>Test Equipment:</b>								
Receiving: Horn T863 and Chamber H SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.7124	12.3	V	0.95	8.27	19.61	30.0	-10.4	
1.7124	15.1	H	0.95	8.27	22.45	30.0	-7.5	
Mid Ch								
1.7326	12.7	V	0.95	8.23	20.00	30.0	-10.0	
1.7326	15.4	H	0.95	8.23	22.66	30.0	-7.3	
High Ch								
1.7526	12.9	V	0.95	8.18	20.11	30.0	-9.9	
1.7526	15.5	H	0.95	8.18	22.73	30.0	-7.3	
Rev. 05.21.15								

## 10.2. RADIATED POWER (ERP & EIRP) (UAT)

### 10.2.1. GSM

#### Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	25.38	345.14
		190	836.6	25.65	367.28
		251	848.8	<b>25.68</b>	369.83
	EGPRS	128	824.2	20.51	112.46
		190	836.6	20.75	118.85
		251	848.8	<b>20.88</b>	122.46

#### Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	GPRS	512	1850.2	26.33	429.54
		661	1880.0	26.24	420.73
		810	1909.8	<b>26.36</b>	432.51
	EGPRS	512	1850.2	22.58	181.13
		661	1880.0	22.51	178.24
		810	1909.8	<b>22.68</b>	185.35

**10.2.2. CDMA2000**

**Part 90 800MHz Band**

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	450	817.3	<b>16.69</b>	46.67
		560	820.0	16.38	43.45
		670	822.8	16.42	43.85
	BC10, EVDO A	450	817.3	<b>16.61</b>	45.81
		560	820.0	16.31	42.76
		670	822.8	16.23	41.98

**Part 22 850MHz Band**

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	17.03	50.47
		384	836.5	17.14	51.76
		777	848.3	<b>17.20</b>	52.48
	BC 0, EVDO Rev A	1013	824.7	16.95	49.55
		384	836.5	17.06	50.82
		777	848.3	<b>17.12</b>	51.52

**Part 24 1900MHz Band**

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	18.65	73.28
		600	1880.0	18.84	76.56
		1175	1908.8	<b>18.95</b>	78.52
	BC1, EVDO REV A	25	1851.3	18.60	72.44
		600	1880.0	18.82	76.21
		1175	1908.8	<b>18.87</b>	77.09

**Part 27 1700MHz Band**

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
AWS	BC15, 1xRTT	25	1711.3	18.82	76.21
		450	1732.5	18.86	76.91
		875	1753.8	<b>19.24</b>	83.95
	BC15, EVDO, REV A	25	1711.3	18.75	74.99
		450	1732.5	18.78	75.51
		875	1753.8	<b>19.17</b>	82.60

### 10.2.3. UMTS

#### Part 22 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4132	826.4	19.83	96.16
		4183	836.6	19.84	96.38
		4233	846.6	<b>20.00</b>	100.00
	UMTS, HSDPA	4132	826.4	18.88	77.27
		4183	836.6	18.93	78.16
		4233	846.6	<b>19.10</b>	81.28

#### Part 24 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	19.74	94.19
		9800	1880.0	<b>19.89</b>	97.50
		9938	1907.6	19.82	95.94
	UMTS, HSDPA	9662	1852.4	18.84	76.56
		9800	1880.0	18.94	78.34
		9938	1907.6	<b>19.02</b>	79.80

#### Part 27 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
AWS	UMTS,REL 99	1537	1712.4	19.47	88.51
		1638	1732.6	<b>19.60</b>	91.20
		1738	1752.5	19.37	86.50
	UMTS, HSDPA	1537	1712.4	18.52	71.12
		1638	1732.6	<b>18.65</b>	73.28
		1738	1752.5	18.42	69.50

**10.2.4. GSM**

**GPRS, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 12/14/15										
<b>Test Engineer:</b> G. Chan										
<b>Configuration:</b> EUT only										
<b>Mode:</b> GSM 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T900, and Chamber H Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	19.2	V	0.6	0.0	18.59	20.74	38.45	40.60	-19.9	
824.20	26.0	H	0.6	0.0	25.38	27.53	38.45	40.60	-13.1	
Mid Ch										
836.60	19.3	V	0.6	0.0	18.68	20.83	38.45	40.60	-19.8	
836.60	26.3	H	0.6	0.0	25.65	27.80	38.45	40.60	-12.8	
High Ch										
848.80	19.0	V	0.6	0.0	18.34	20.49	38.45	40.60	-20.1	
848.80	26.3	H	0.6	0.0	25.68	27.83	38.45	40.60	-12.8	
Rev. 06.18.14										

**EGPRS, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 12/14/15										
<b>Test Engineer:</b> G. Chan										
<b>Configuration:</b> EUT only										
<b>Mode:</b> EDGE 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T900, and Chamber H Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	19.5	V	0.6	0.0	18.92	21.07	38.45	40.60	-19.5	
824.20	21.1	H	0.6	0.0	20.51	22.66	38.45	40.60	-17.9	
Mid Ch										
836.60	19.4	V	0.6	0.0	18.78	20.93	38.45	40.60	-19.7	
836.60	21.4	H	0.6	0.0	20.75	22.90	38.45	40.60	-17.7	
High Ch										
848.80	19.6	V	0.6	0.0	18.94	21.09	38.45	40.60	-19.5	
848.80	21.5	H	0.6	0.0	20.88	23.03	38.45	40.60	-17.6	
Rev. 06.18.14										

**GPRS, 1900MHz BAND 2**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/14/15								
<b>Test Engineer:</b> G. Chan								
<b>Configuration:</b> EUT only								
<b>Mode:</b> GSM 1900MHz								
<b>Test Equipment:</b>								
Receiving: Horn T863 and Chamber H SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.8502	18.4	V	0.98	8.05	25.51	33.0	-7.5	
1.8502	19.3	H	0.98	8.05	26.33	33.0	-6.7	
Mid Ch								
1.8800	18.4	V	0.98	8.03	25.45	33.0	-7.6	
1.8800	19.2	H	0.98	8.03	26.24	33.0	-6.8	
High Ch								
1.9100	18.5	V	0.98	8.05	25.58	33.0	-7.4	
1.9100	19.3	H	0.98	8.05	26.36	33.0	-6.6	
Rev. 06.18.14								

**EGPRS, 1900MHz BAND 2**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/14/15								
<b>Test Engineer:</b> G. Chan								
<b>Configuration:</b> EUT only								
<b>Mode:</b> EDGE 1900MHz								
<b>Test Equipment:</b>								
Receiving: Horn T863 and Chamber H SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.8502	13.9	V	0.98	8.05	20.96	33.0	-12.0	
1.8502	15.5	H	0.98	8.05	22.58	33.0	-10.4	
Mid Ch								
1.8800	13.5	V	0.98	8.03	20.57	33.0	-12.4	
1.8800	15.5	H	0.98	8.03	22.51	33.0	-10.5	
High Ch								
1.9098	13.6	V	0.98	8.05	20.68	33.0	-12.3	
1.9098	15.6	H	0.98	8.05	22.68	33.0	-10.3	
Rev. 06.18.14								

**10.2.5. CDMA2000**

**CDMA2000 1xRTT, 800MHz BC10**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 01/05/16								
<b>Test Engineer:</b> G. Chan								
<b>Configuration:</b> EUT only								
<b>Mode:</b> CDMA 1XRTT 800MHz								
<b>Test Equipment:</b>								
Receiving: Sunol T899, and Chamber G Cable								
Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	13.14	V	0.6	0.0	12.52	50.00	-37.5	
817.25	17.31	H	0.6	0.0	16.69	50.00	-33.3	
Mid Ch								
820.00	13.91	V	0.6	0.0	13.29	50.00	-36.7	
820.00	17.00	H	0.6	0.0	16.38	50.00	-33.6	
High Ch								
822.75	13.76	V	0.6	0.0	13.14	50.00	-36.9	
822.75	17.04	H	0.6	0.0	16.42	50.00	-33.6	
Rev. 05.21.15								

**EVDO-Rev A, 800MHz BC10**

High Frequency Substitution Measurement UL Fremont Radiated Chamber H										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 12/14/15										
<b>Test Engineer:</b> G. Chan										
<b>Configuration:</b> EUT only										
<b>Mode:</b> WCDMA HSPA 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T900, and Chamber H Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	13.0	V	0.6	0.0	12.41	14.56	38.45	40.60	-26.0	
826.40	17.2	H	0.6	0.0	16.61	18.76	38.45	40.60	-21.8	
Mid Ch										
836.60	12.6	V	0.6	0.0	11.96	14.11	38.45	40.60	-26.5	
836.60	16.9	H	0.6	0.0	16.31	18.46	38.45	40.60	-22.1	
High Ch										
846.60	12.5	V	0.6	0.0	11.88	14.03	38.45	40.60	-26.6	
846.60	16.9	H	0.6	0.0	16.23	18.38	38.45	40.60	-22.2	
Rev. 05.21.15										

**CDMA2000 1xRTT, 850MHz BC0**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 01/05/16										
<b>Test Engineer:</b> G. Chan										
<b>Configuration:</b> EUT only										
<b>Mode:</b> CDMA 1XRTT 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T899, and Chamber G Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	14.7	V	0.6	0.0	14.09	16.24	38.45	40.60	-24.4	
824.70	17.7	H	0.6	0.0	17.03	19.18	38.45	40.60	-21.4	
Mid Ch										
836.52	14.8	V	0.6	0.0	14.14	16.29	38.45	40.60	-24.3	
836.52	17.8	H	0.6	0.0	17.14	19.29	38.45	40.60	-21.3	
High Ch										
848.31	15.0	V	0.6	0.0	14.40	16.55	38.45	40.60	-24.0	
848.31	17.8	H	0.6	0.0	17.20	19.35	38.45	40.60	-21.2	
Rev. 06.18.14										

**EVDO-Rev A, 850MHz BC0**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 01/06/15										
<b>Test Engineer:</b> G. Chan										
<b>Configuration:</b> EUT only										
<b>Mode:</b> CDMA Rev A 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T899, and Chamber G Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	14.6	V	0.6	0.0	14.01	16.16	38.45	40.60	-24.4	
824.70	17.6	H	0.6	0.0	16.95	19.10	38.45	40.60	-21.5	
Mid Ch										
836.52	14.7	V	0.6	0.0	14.06	16.21	38.45	40.60	-24.4	
836.52	17.7	H	0.6	0.0	17.06	19.21	38.45	40.60	-21.4	
High Ch										
848.31	14.9	V	0.6	0.0	14.32	16.47	38.45	40.60	-24.1	
848.31	17.7	H	0.6	0.0	17.12	19.27	38.45	40.60	-21.3	
Rev. 06.18.14										

**CDMA2000 1xRTT, 1900MHz BC1**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G									
<b>Company:</b>									
<b>Project #:</b> 15U21635									
<b>Date:</b> 01/05/16									
<b>Test Engineer:</b> G. Chan									
<b>Configuration:</b> EUT only									
<b>Mode:</b> CDMA 1XRTT 1900MHz									
<b>Test Equipment:</b>									
Receiving: Horn T862 and Chamber G SMA Cables									
Substitution: Horn T59 Substitution, and 8ft SMA Cable									
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
Low Ch									
1.851	9.6	V	0.98	8.05	16.67	33.0	-16.3		
1.851	11.6	H	0.98	8.05	18.65	33.0	-14.3		
Mid Ch									
1.880	9.5	V	0.98	8.03	16.58	33.0	-16.4		
1.880	11.8	H	0.98	8.03	18.84	33.0	-14.2		
High Ch									
1.909	8.9	V	0.98	8.05	15.94	33.0	-17.1		
1.909	11.9	H	0.98	8.05	18.95	33.0	-14.1		
Rev. 06.18.14									

**EVDO-Rev A, 1900MHz BC1**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 01/06/15								
<b>Test Engineer:</b> G. Chan								
<b>Configuration:</b> EUT only								
<b>Mode:</b> CDMA Rev A 1900MHz								
<b>Test Equipment:</b>								
Receiving: Horn T862 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	9.5	V	0.98	8.05	16.57	33.0	-16.4	
1.851	11.5	H	0.98	8.05	18.60	33.0	-14.4	
Mid Ch								
1.880	9.5	V	0.98	8.03	16.50	33.0	-16.5	
1.880	11.8	H	0.98	8.03	18.82	33.0	-14.2	
High Ch								
1.909	8.9	V	0.98	8.05	15.96	33.0	-17.0	
1.909	11.8	H	0.98	8.05	18.87	33.0	-14.1	
Rev. 05.21.15								

**CDMA2000 1xRTT, 1700MHz BC15**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 01/05/16								
<b>Test Engineer:</b> G. Chan								
<b>Configuration:</b> EUT only								
<b>Mode:</b> CDMA 1XRTT 1700MHz								
<b>Test Equipment:</b>								
Receiving: Horn T862 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	7.9	V	0.95	8.27	15.19	30.0	-14.8	
1.711	11.5	H	0.95	8.27	18.82	30.0	-11.2	
Mid Ch								
1.733	9.0	V	0.95	8.23	16.25	30.0	-13.8	
1.733	11.6	H	0.95	8.23	18.86	30.0	-11.1	
High Ch								
1.754	9.8	V	0.95	8.18	17.05	30.0	-12.9	
1.754	12.0	H	0.95	8.18	19.24	30.0	-10.8	
Rev. 05.21.15								

**EVDO-Rev A, 1700MHz BC15**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 01/06/15								
<b>Test Engineer:</b> G. Chan								
<b>Configuration:</b> EUT only								
<b>Mode:</b> CDMA Rev A 1700MHz								
<b>Test Equipment:</b>								
Receiving: Horn T862 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.711	7.8	V	0.95	8.27	15.12	30.0	-14.9	
1.711	11.4	H	0.95	8.27	18.75	30.0	-11.3	
Mid Ch								
1.733	8.9	V	0.95	8.23	16.17	30.0	-13.8	
1.733	11.5	H	0.95	8.23	18.78	30.0	-11.2	
High Ch								
1.754	9.8	V	0.95	8.18	16.98	30.0	-13.0	
1.754	11.9	H	0.95	8.18	19.17	30.0	-10.8	
Rev. 05.21.15								

**10.2.6. UMTS**

**UMTS REL 99, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 12/31/15										
<b>Test Engineer:</b> G. Chan										
<b>Configuration:</b> EUT only										
<b>Mode:</b> WCDMA Rel 99 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T899, and Chamber G Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	10.1	V	0.6	0.0	9.52	11.67	38.45	40.60	-28.9	
826.40	20.5	H	0.6	0.0	19.83	21.98	38.45	40.60	-18.6	
Mid Ch										
836.60	10.9	V	0.6	0.0	10.25	12.40	38.45	40.60	-28.2	
836.60	20.5	H	0.6	0.0	19.84	21.99	38.45	40.60	-18.6	
High Ch										
846.60	11.2	V	0.6	0.0	10.56	12.71	38.45	40.60	-27.9	
846.60	20.6	H	0.6	0.0	20.00	22.15	38.45	40.60	-18.4	
Rev. 05.21.15										

**UMTS HSDPA, 850MHz BAND 5**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
<b>Company:</b>										
<b>Project #:</b> 15U21635										
<b>Date:</b> 12/31/15										
<b>Test Engineer:</b> G. Chan										
<b>Configuration:</b> EUT only										
<b>Mode:</b> WCDMA HSDPA 850MHz										
<b>Test Equipment:</b>										
Receiving: Sunol T899, and Chamber G Cable										
Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	9.4	V	0.6	0.0	8.77	10.92	38.45	40.60	-29.7	
826.40	19.5	H	0.6	0.0	18.88	21.03	38.45	40.60	-19.6	
Mid Ch										
836.60	9.7	V	0.6	0.0	9.13	11.28	38.45	40.60	-29.3	
836.60	19.6	H	0.6	0.0	18.93	21.08	38.45	40.60	-19.5	
High Ch										
846.60	9.8	V	0.6	0.0	9.22	11.37	38.45	40.60	-29.2	
846.60	19.7	H	0.6	0.0	19.10	21.25	38.45	40.60	-19.3	
Rev. 05.21.15										

**UMTS REL 99, 1900MHZ BAND 2**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/31/15								
<b>Test Engineer:</b> G. Chan								
<b>Configuration:</b> EUT only								
<b>Mode:</b> WCDMA Rel 99 1900MHz								
<b>Test Equipment:</b>								
Receiving: Horn T862 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	6.0	V	0.98	8.05	13.11	33.0	-19.9	
1.852	12.7	H	0.98	8.05	19.74	33.0	-13.3	
Mid Ch								
1.880	5.8	V	0.98	8.03	12.87	33.0	-20.1	
1.880	12.8	H	0.98	8.03	19.89	33.0	-13.1	
High Ch								
1.908	5.3	V	0.98	8.04	12.32	33.0	-20.7	
1.908	12.8	H	0.98	8.04	19.82	33.0	-13.2	
Rev. 05.21.15								

**UMTS HSDPA, 1900MHz BAND 2**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G									
<b>Company:</b>									
<b>Project #:</b> 15U21635									
<b>Date:</b> 12/31/15									
<b>Test Engineer:</b> G. Chan									
<b>Configuration:</b> EUT only									
<b>Mode:</b> WCDMA HSDPA 1900MHz									
<b>Test Equipment:</b>									
Receiving: Horn T862 and Chamber G SMA Cables									
Substitution: Horn T59 Substitution, and 8ft SMA Cable									
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
Low Ch									
1.852	6.2	V	0.98	8.05	13.32	33.0	-19.7		
1.852	11.8	H	0.98	8.05	18.84	33.0	-14.2		
Mid Ch									
1.880	5.2	V	0.98	8.03	12.25	33.0	-20.7		
1.880	11.9	H	0.98	8.03	18.94	33.0	-14.1		
High Ch									
1.908	4.6	V	0.98	8.04	11.62	33.0	-21.4		
1.908	12.0	H	0.98	8.04	19.02	33.0	-14.0		
Rev. 05.21.15									

**UMTS REL 99, 1700MHz BAND 4**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/31/15								
<b>Test Engineer:</b> G. Chan								
<b>Configuration:</b> EUT only								
<b>Mode:</b> WCDMA Rel 99 1700MHz								
<b>Test Equipment:</b>								
Receiving: Horn T862 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.7124	5.2	V	0.95	8.27	12.52	30.0	-17.5	
1.7124	12.2	H	0.95	8.27	19.47	30.0	-10.5	
Mid Ch								
1.7326	6.5	V	0.95	8.23	13.76	30.0	-16.2	
1.7326	12.3	H	0.95	8.23	19.60	30.0	-10.4	
High Ch								
1.7526	7.4	V	0.95	8.18	14.61	30.0	-15.4	
1.7526	12.1	H	0.95	8.18	19.37	30.0	-10.6	
Rev. 05.21.15								

**UMTS HSDPA, 1700MHz BAND 4**

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
<b>Company:</b>								
<b>Project #:</b> 15U21635								
<b>Date:</b> 12/31/15								
<b>Test Engineer:</b> G. Chan								
<b>Configuration:</b> EUT only								
<b>Mode:</b> WCDMA HSDPA 1700MHz								
<b>Test Equipment:</b>								
Receiving: Horn T862 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.7124	4.0	V	0.95	8.27	11.35	30.0	-18.7	
1.7124	11.2	H	0.95	8.27	18.52	30.0	-11.5	
Mid Ch								
1.7326	5.6	V	0.95	8.23	12.86	30.0	-17.1	
1.7326	11.4	H	0.95	8.23	18.65	30.0	-11.4	
High Ch								
1.7526	6.5	V	0.95	8.18	13.76	30.0	-16.2	
1.7526	11.2	H	0.95	8.18	18.42	30.0	-11.6	
Rev. 05.21.15								

### 10.3. PEAK-TO-AVERAGE RATIO

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
GSM850	GPRS	33.80	33.31	0.49
	EGPRS	32.22	28.00	4.22
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
GSM1900	GPRS	30.94	30.45	0.49
	EGPRS	30.9	27.02	3.88
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC0	1xRTT	29.57	24.95	4.62
	EVDO A	30.17	24.99	5.18
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC1	1xRTT	26.36	22.28	4.08
	EVDO A	27.92	22.3	5.62
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC15	1xRTT	26.57	22.98	3.59
	EVDO A	26.98	22.99	3.99
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
CDMA2000 BC10	1xRTT	29.63	24.97	4.66
	EVDO A	30.1	24.98	5.12
*Peak Reading = Average Reading + Peak-to-Average Ratio				


Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS Band 5	REL99	28.13	24.96	3.17
	HSDPA	27.93	24.13	3.80
*Peak Reading = Average Reading + Peak-to-Average Ratio				

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS Band 2	REL99	25.76	22.49	3.27
	HSDPA	24.88	21.49	3.39
*Peak Reading = Average Reading + Peak-to-Average Ratio				


Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio (PAR)
		*Peak	Average	
UMTS Band 4	REL99	25.91	22.68	3.23
	HSDPA	25.02	21.69	3.33

\*Peak Reading = Average Reading + Peak-to-Average Ratio


**GSM850, GPRS**

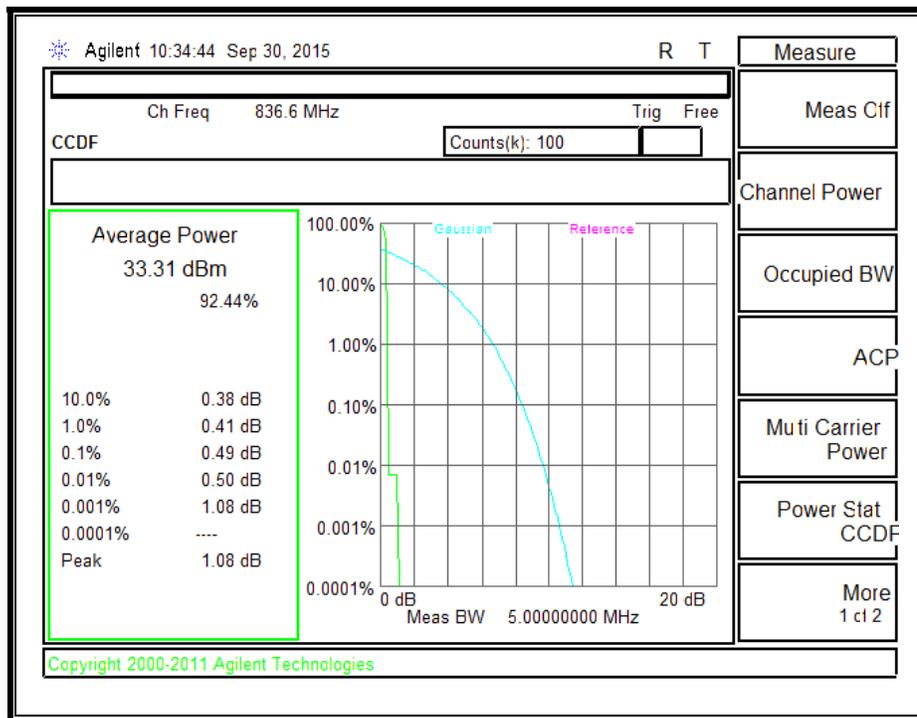


**GSM850, EGPRS**

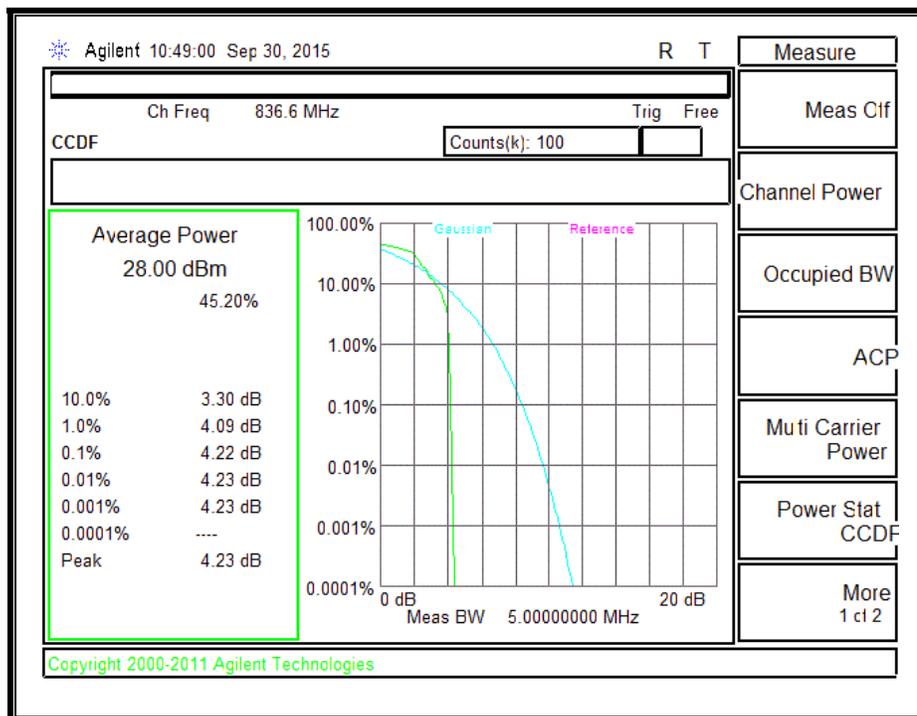


**GSM1900, GPRS**

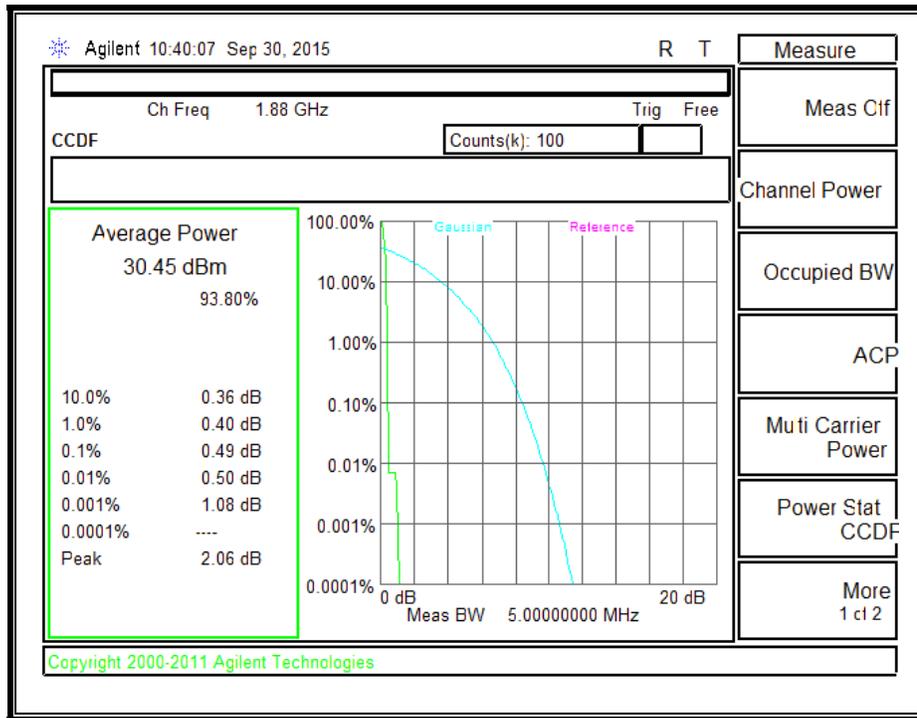


**GSM1900, EGPRS**

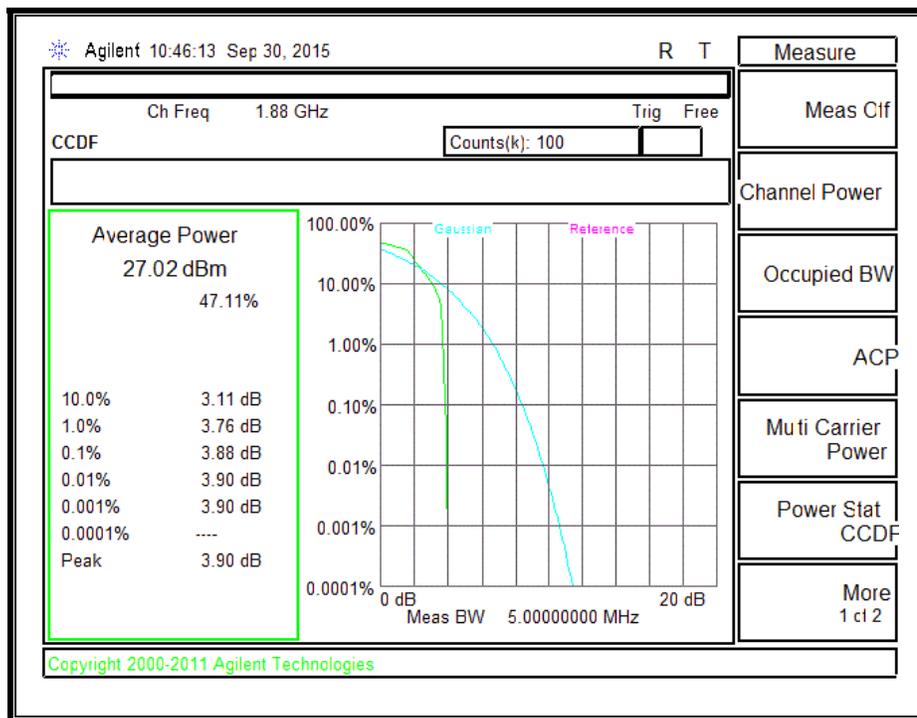


**BC 0, 1xRTT**

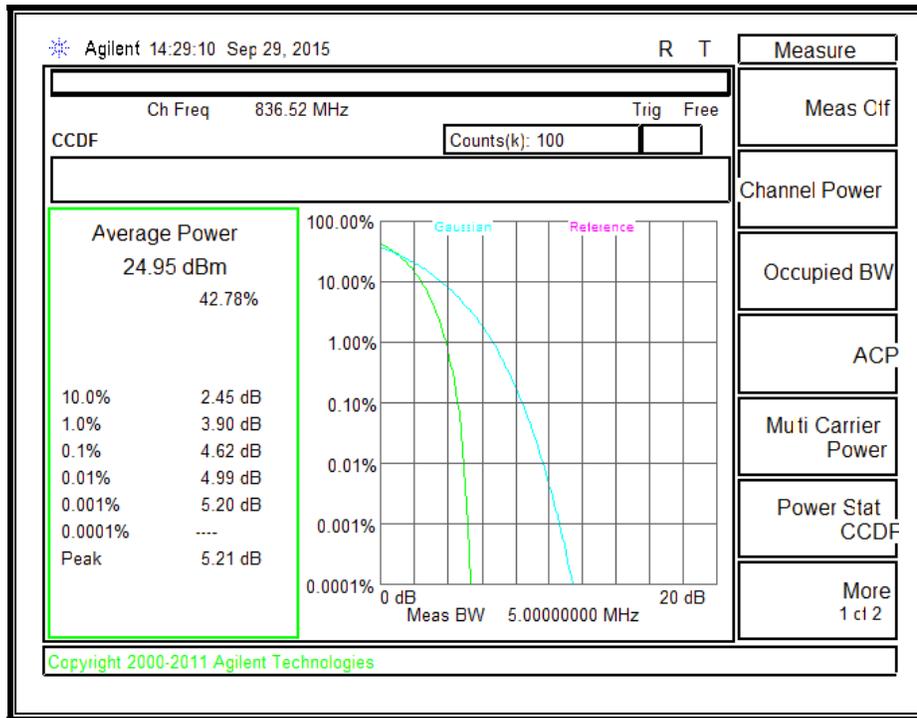


**BC 0, EVDO A**

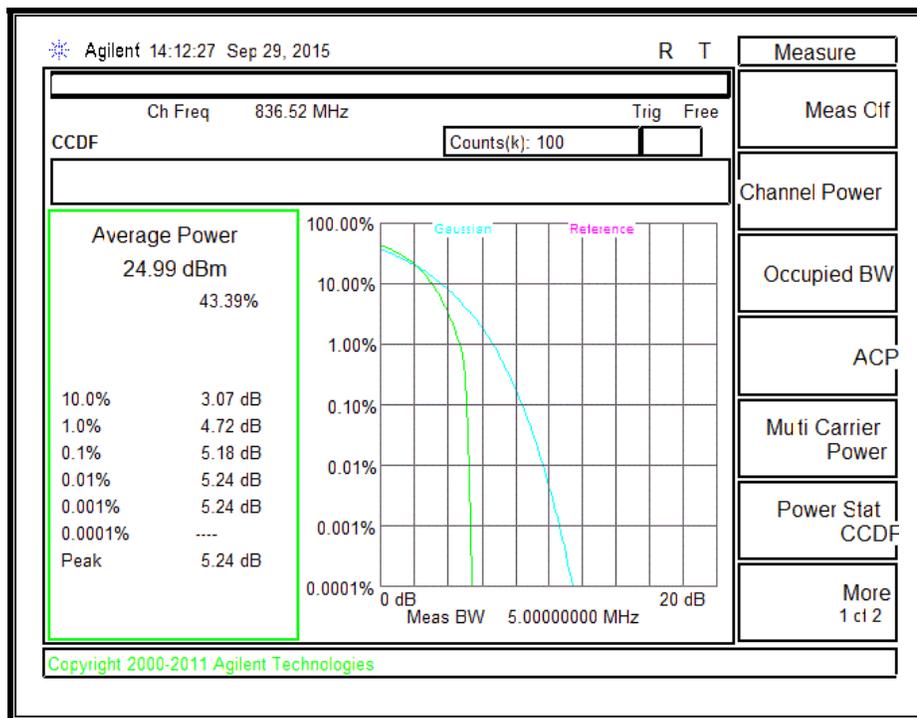


**BC 1, 1xRTT**

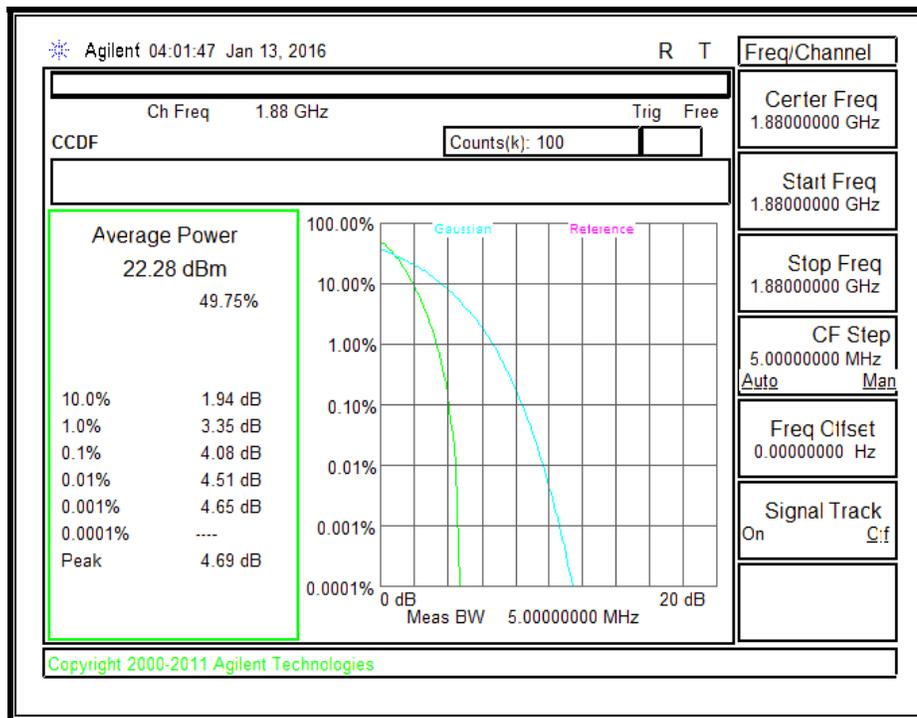


**BC 1, EVDO A**

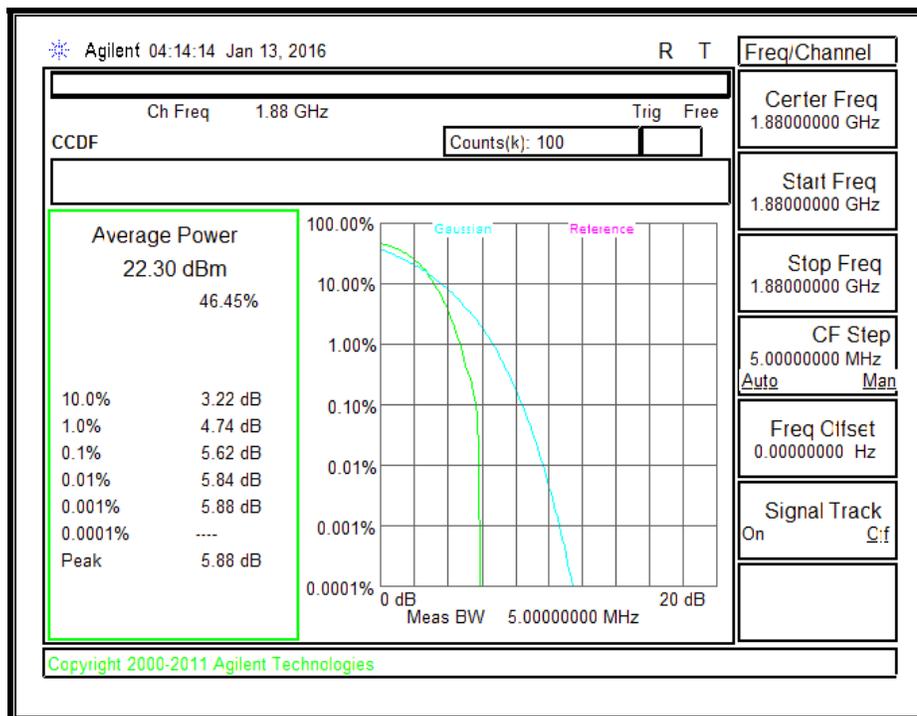


**BC15, 1xRTT**

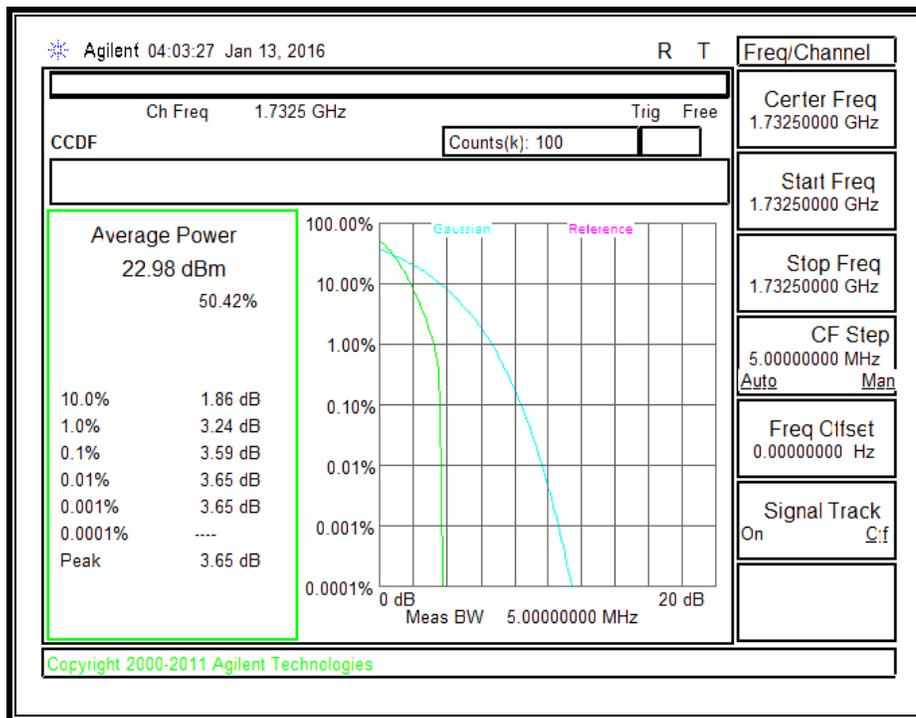


**BC15, EVDO A**

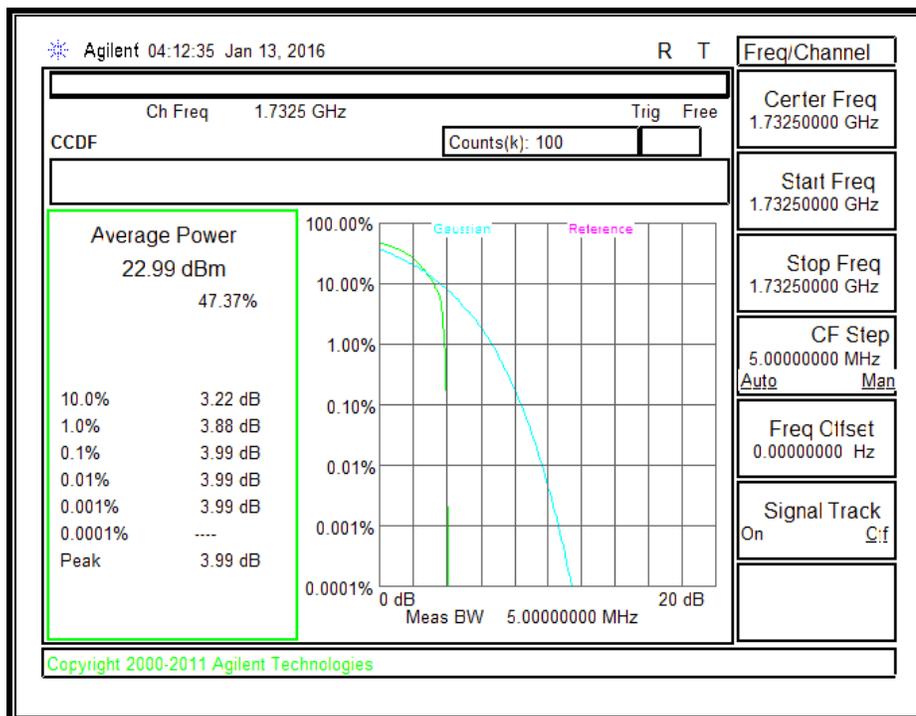


**BC10, 1xRTT**

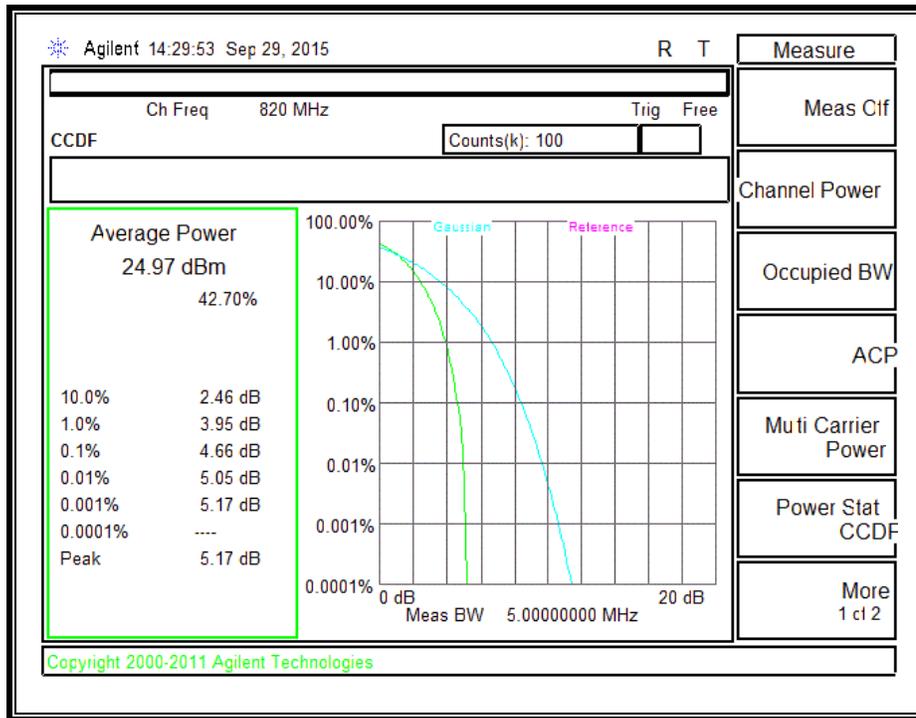


**BC10, EVDO A**

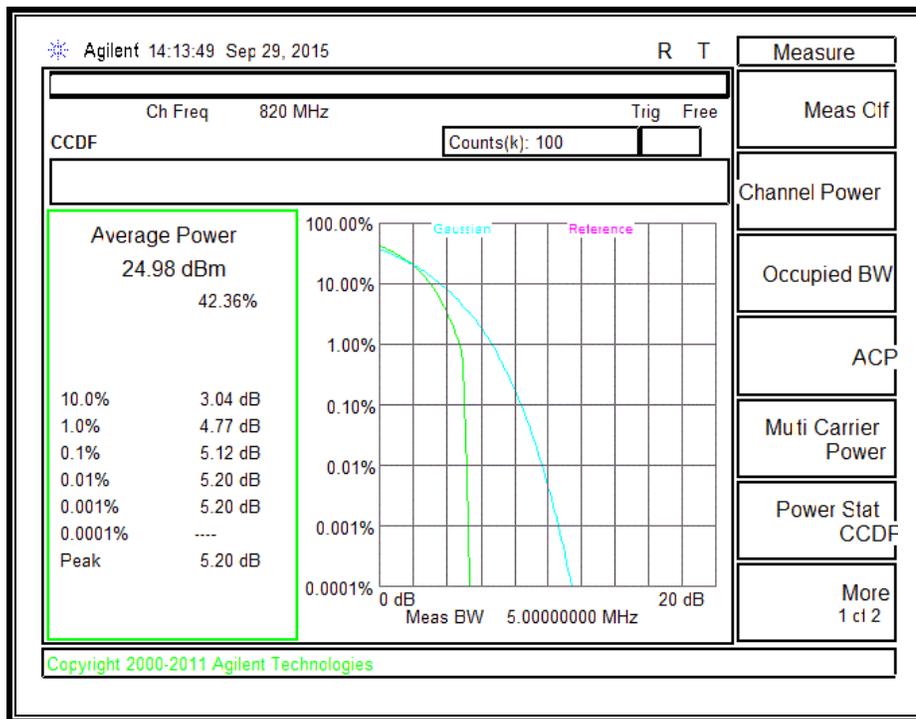


**UMTS 850, REL 99 BAND 5**

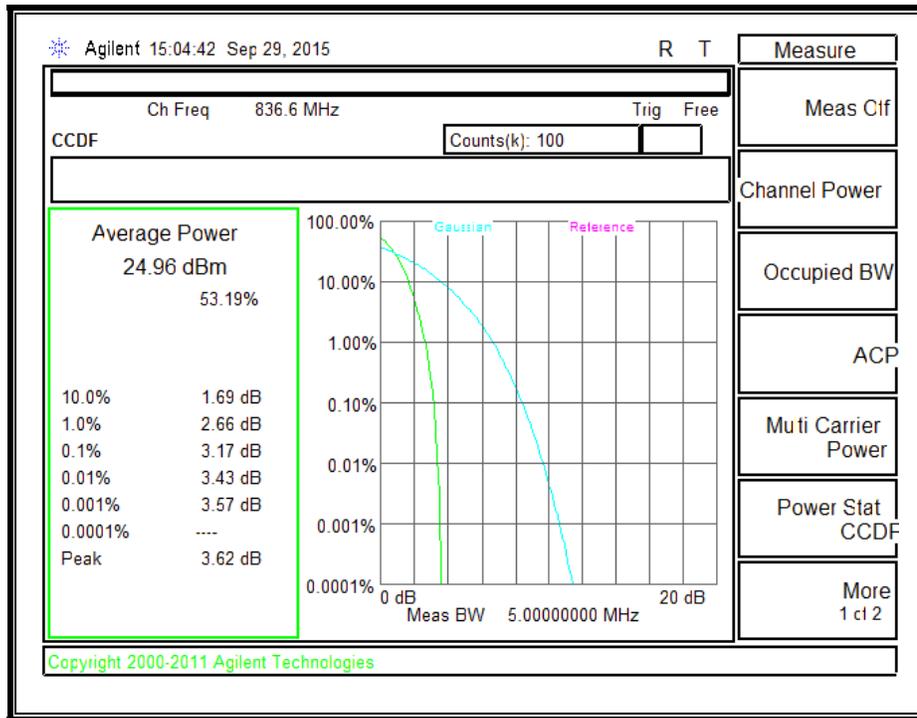


**UMTS 850, HSDPA BAND 5**

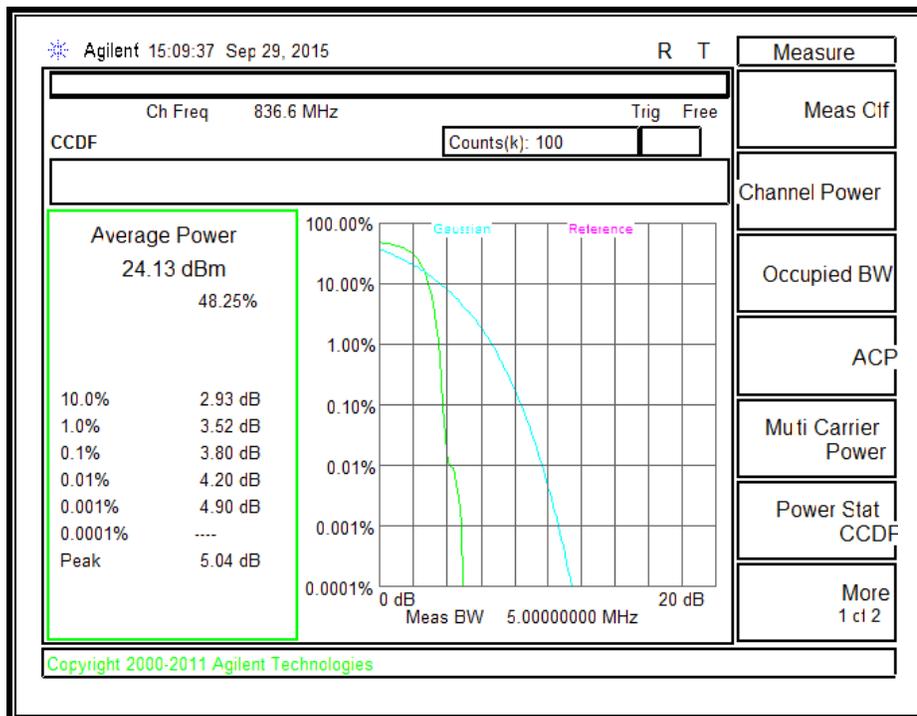


**UMTS 1900, REL99 BAND 2**

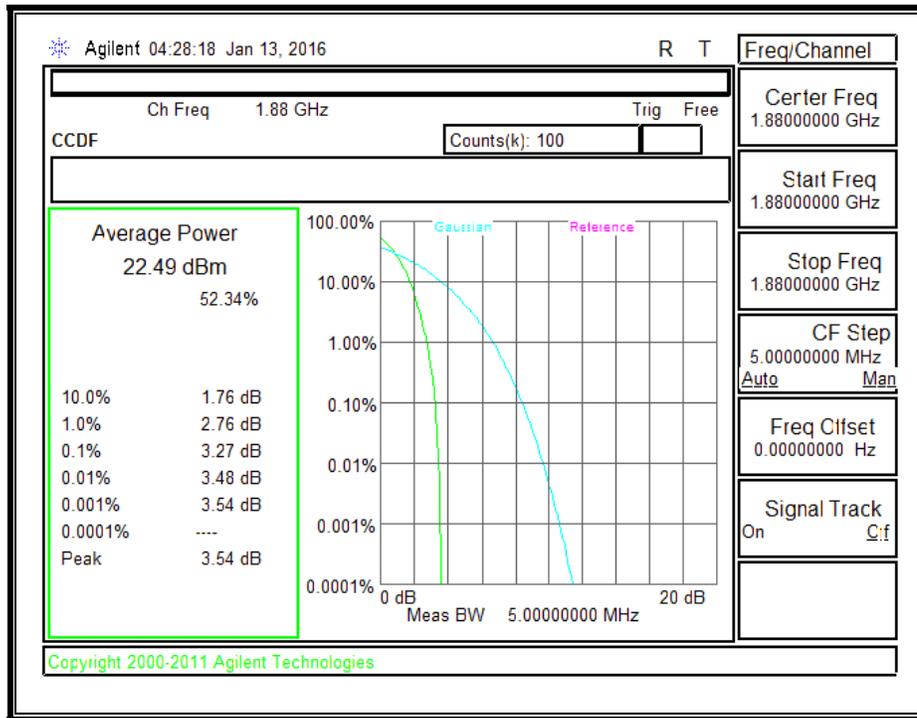


**UMTS 1900, HSDPA BAND 2**

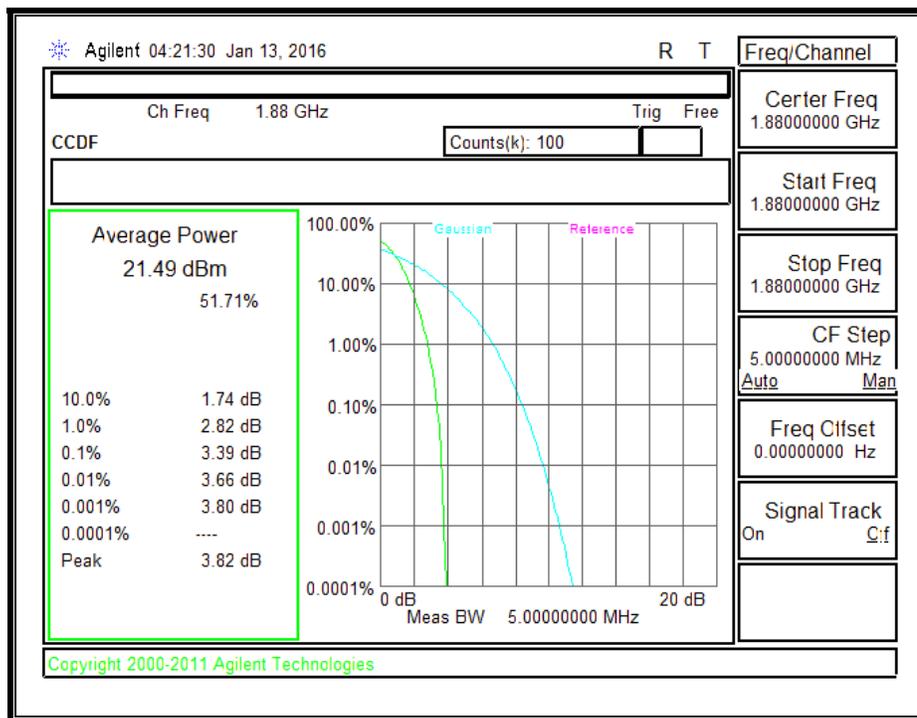

**UMTS 1700, REL99 BAND 4**

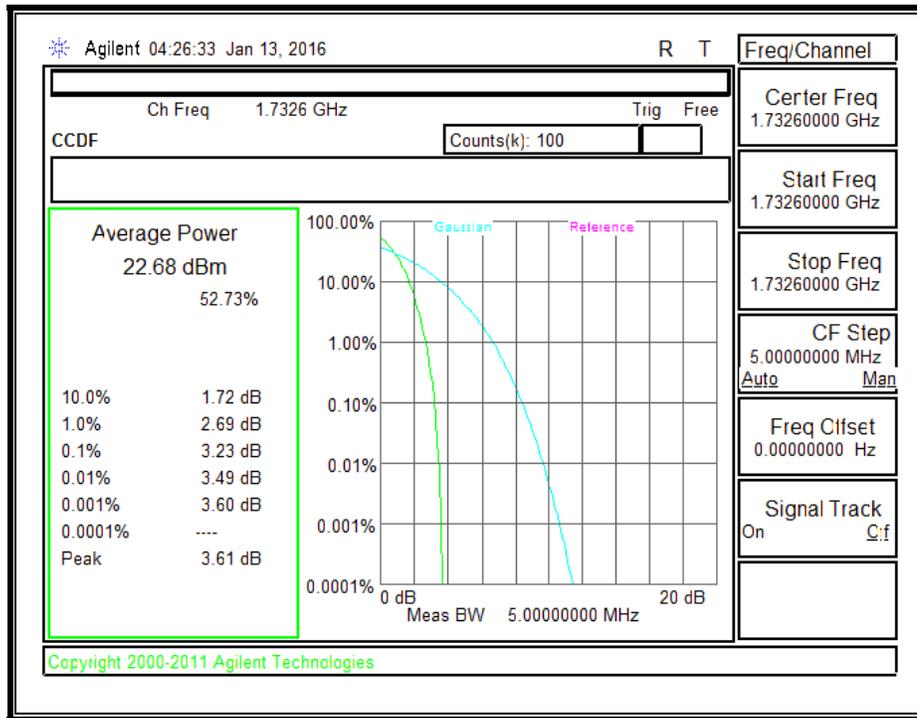

**UMTS 1700, HSDPA BAND 4**

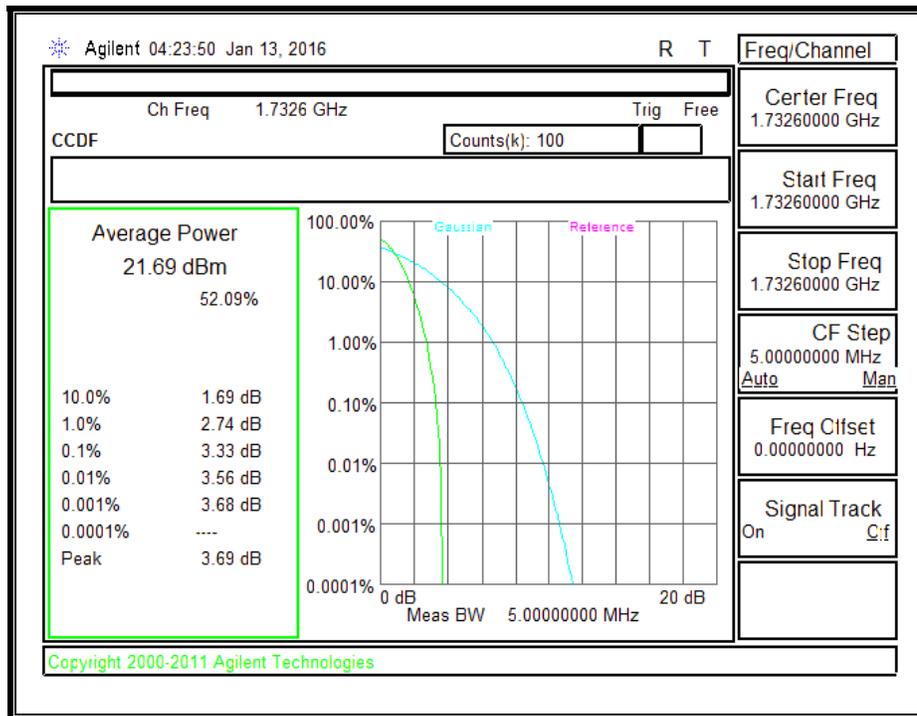

## 10.4. FIELD STRENGTH OF SPURIOUS RADIATION (LAT)

### RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53 and §90.691.

### LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

§27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB

§90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

### TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth ( i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve

measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### **MODES TESTED**

- GPRS/EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, 1xRTT and EVDO, Rev A

#### **RESULTS**

### 10.4.1. GSM

#### GPRS, 850MHz BAND 5

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

Company: 15U21635  
 Project #: 15U21635  
 Date: 09/10/15  
 Test Engineer: T Wang  
 Configuration: EUT only  
 Mode: GPRS 850MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

Pre-amplifier

Filter

Limit

3m Chamber H

3m Chamber H

Filter

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (824.2MHz)</b>										
1.65	-54.3	H	3.0	-13.9	37.7	1.0	-50.7	-13.0	-37.7	
2.47	-64.4	H	3.0	-20.4	37.0	1.0	-56.4	-13.0	-43.4	
3.30	-64.2	H	3.0	-16.4	37.9	1.0	-53.3	-13.0	-40.3	
4.13	-59.4	H	3.0	-11.1	37.1	1.0	-47.2	-13.0	-34.2	
1.65	-52.0	V	3.0	-11.4	37.7	1.0	-48.1	-13.0	-35.1	
2.47	-63.3	V	3.0	-19.2	37.0	1.0	-55.2	-13.0	-42.2	
3.30	-62.6	V	3.0	-15.8	37.9	1.0	-52.7	-13.0	-39.7	
4.12	-60.1	V	3.0	-11.5	37.1	1.0	-47.6	-13.0	-34.6	
<b>Mid Channel (836.6MHz)</b>										
1.67	-54.2	H	3.0	-13.7	37.8	1.0	-50.4	-13.0	-37.4	
2.50	-64.3	H	3.0	-20.2	37.1	1.0	-56.3	-13.0	-43.3	
3.35	-64.5	H	3.0	-16.7	37.8	1.0	-53.5	-13.0	-40.5	
4.18	-64.4	H	3.0	-16.0	37.0	1.0	-52.0	-13.0	-39.0	
1.67	-50.7	V	3.0	-9.9	37.8	1.0	-46.7	-13.0	-33.7	
2.50	-61.8	V	3.0	-17.6	37.1	1.0	-53.7	-13.0	-40.7	
3.35	-62.2	V	3.0	-15.3	37.8	1.0	-52.1	-13.0	-39.1	
4.18	-61.7	V	3.0	-13.0	37.0	1.0	-49.1	-13.0	-36.1	
<b>High Channel (848.8MHz)</b>										
1.70	-58.5	H	3.0	-17.8	37.8	1.0	-54.5	-13.0	-41.5	
2.55	-64.2	H	3.0	-19.8	37.2	1.0	-56.0	-13.0	-43.0	
3.40	-65.4	H	3.0	-17.6	37.8	1.0	-54.3	-13.0	-41.3	
4.25	-61.1	H	3.0	-12.6	37.0	1.0	-48.6	-13.0	-35.6	
1.70	-52.7	V	3.0	-11.8	37.8	1.0	-48.6	-13.0	-35.6	
2.55	-61.2	V	3.0	-16.9	37.2	1.0	-53.0	-13.0	-40.0	
3.40	-62.1	V	3.0	-15.1	37.8	1.0	-51.8	-13.0	-38.8	
4.25	-57.5	V	3.0	-8.7	37.0	1.0	-44.7	-13.0	-31.7	

Rev. 03.19.15

**EGPRS, 850MHz BAND 5**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/10/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** EGPRS 850MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (824.2MHz)</b>										
1.65	-59.2	H	3.0	-18.8	37.7	1.0	-55.6	-13.0	-42.6	
2.47	-64.2	H	3.0	-20.2	37.0	1.0	-56.2	-13.0	-43.2	
3.30	-65.6	H	3.0	-17.8	37.9	1.0	-54.7	-13.0	-41.7	
4.13	-64.1	H	3.0	-15.8	37.1	1.0	-51.9	-13.0	-38.9	
1.65	-55.3	V	3.0	-14.7	37.7	1.0	-51.4	-13.0	-38.4	
2.47	-63.0	V	3.0	-18.9	37.0	1.0	-54.9	-13.0	-41.9	
3.30	-63.2	V	3.0	-16.4	37.9	1.0	-53.3	-13.0	-40.3	
4.13	-60.5	V	3.0	-11.9	37.1	1.0	-48.0	-13.0	-35.0	
<b>Mid Channel (836.6MHz)</b>										
1.67	-61.6	H	3.0	-21.1	37.8	1.0	-57.8	-13.0	-44.8	
2.50	-65.2	H	3.0	-21.1	37.1	1.0	-57.2	-13.0	-44.2	
3.35	-65.3	H	3.0	-17.5	37.8	1.0	-54.3	-13.0	-41.3	
4.18	-64.6	H	3.0	-16.2	37.0	1.0	-52.2	-13.0	-39.2	
1.67	-52.7	V	3.0	-11.9	37.8	1.0	-48.7	-13.0	-35.7	
2.50	-64.5	V	3.0	-20.3	37.1	1.0	-56.4	-13.0	-43.4	
3.35	-64.6	V	3.0	-17.7	37.8	1.0	-54.5	-13.0	-41.5	
4.18	-62.3	V	3.0	-13.6	37.0	1.0	-49.7	-13.0	-36.7	
<b>High Channel (848.8MHz)</b>										
1.70	-60.4	H	3.0	-19.7	37.8	1.0	-56.4	-13.0	-43.4	
2.55	-61.2	H	3.0	-16.8	37.2	1.0	-53.0	-13.0	-40.0	
3.40	-64.6	H	3.0	-16.8	37.8	1.0	-53.5	-13.0	-40.5	
4.25	-63.2	H	3.0	-14.7	37.0	1.0	-50.7	-13.0	-37.7	
1.70	-58.0	V	3.0	-17.1	37.8	1.0	-53.9	-13.0	-40.9	
2.55	-63.2	V	3.0	-18.9	37.2	1.0	-55.0	-13.0	-42.0	
3.40	-62.9	V	3.0	-15.9	37.8	1.0	-52.6	-13.0	-39.6	
4.25	-61.0	V	3.0	-12.2	37.0	1.0	-48.2	-13.0	-35.2	

Rev. 03.19.15

**GPRS, 1900MHz BAND 2**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

Company:  
 Project #: 15U21635  
 Date: 09/08/15  
 Test Engineer: T Wang  
 Configuration: EUT only  
 Mode: GPRS 1900MHz

Test Equipment:  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (HV)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1850.2MHz)</b>										
3.70	-63.5	H	3.0	-15.6	37.4	1.0	-52.0	-13.0	-39.0	
5.55	-64.7	H	3.0	-13.8	36.7	1.0	-49.5	-13.0	-36.5	
7.40	-65.4	H	3.0	-11.7	36.0	1.0	-46.7	-13.0	-33.7	
3.70	-63.7	V	3.0	-16.0	37.4	1.0	-52.4	-13.0	-39.4	
5.55	-65.0	V	3.0	-14.0	36.7	1.0	-49.7	-13.0	-36.7	
7.40	-66.4	V	3.0	-12.9	36.0	1.0	-47.9	-13.0	-34.9	
<b>Mid Channel (1880.0)</b>										
3.76	-63.4	H	3.0	-15.4	37.4	1.0	-51.8	-13.0	-38.8	
5.64	-64.7	H	3.0	-13.6	36.7	1.0	-49.3	-13.0	-36.3	
7.52	-66.3	H	3.0	-12.5	35.9	1.0	-47.4	-13.0	-34.4	
3.76	-62.5	V	3.0	-14.7	37.4	1.0	-51.0	-13.0	-38.0	
5.64	-60.3	V	3.0	-9.1	36.7	1.0	-44.9	-13.0	-31.9	
7.52	-61.6	V	3.0	-8.0	35.9	1.0	-42.9	-13.0	-29.9	
<b>High Channel (1909.8MHz)</b>										
3.82	-63.6	H	3.0	-15.6	37.3	1.0	-51.9	-13.0	-38.9	
5.73	-64.5	H	3.0	-13.3	36.7	1.0	-49.0	-13.0	-36.0	
7.64	-66.4	H	3.0	-12.4	35.8	1.0	-47.2	-13.0	-34.2	
3.82	-63.3	V	3.0	-15.4	37.3	1.0	-51.6	-13.0	-38.6	
5.73	-65.0	V	3.0	-13.7	36.7	1.0	-49.4	-13.0	-36.4	
7.64	-66.5	V	3.0	-12.8	35.8	1.0	-47.6	-13.0	-34.6	

Rev. 03.19.15

**EGPRS, 1900MHz BAND 2**

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/08/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** EGPRS 1900MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

Pre-amplifier

Filter

Limit

3m Chamber H

3m Chamber H

Filter

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1850.2MHz)</b>										
3.70	-63.1	H	3.0	-15.2	37.4	1.0	-51.6	-13.0	-38.6	
5.55	-65.1	H	3.0	-14.2	36.7	1.0	-49.9	-13.0	-36.9	
7.40	-66.5	H	3.0	-12.8	36.0	1.0	-47.8	-13.0	-34.8	
3.70	-63.7	V	3.0	-16.0	37.4	1.0	-52.4	-13.0	-39.4	
5.55	-64.6	V	3.0	-13.6	36.7	1.0	-49.3	-13.0	-36.3	
7.40	-64.9	V	3.0	-11.4	36.0	1.0	-46.4	-13.0	-33.4	
<b>Mid Channel (1880.0)</b>										
3.76	-63.6	H	3.0	-15.6	37.4	1.0	-52.0	-13.0	-39.0	
5.64	-65.0	H	3.0	-13.9	36.7	1.0	-49.6	-13.0	-36.6	
7.52	-66.4	H	3.0	-12.6	35.9	1.0	-47.5	-13.0	-34.5	
3.76	-62.8	V	3.0	-15.0	37.4	1.0	-51.3	-13.0	-38.3	
5.64	-65.0	V	3.0	-13.8	36.7	1.0	-49.6	-13.0	-36.6	
7.52	-66.3	V	3.0	-12.7	35.9	1.0	-47.6	-13.0	-34.6	
<b>High Channel (1909.8MHz)</b>										
3.82	-64.0	H	3.0	-16.0	37.3	1.0	-52.3	-13.0	-39.3	
5.73	-65.2	H	3.0	-14.0	36.7	1.0	-49.7	-13.0	-36.7	
7.64	-65.8	H	3.0	-11.8	35.8	1.0	-46.6	-13.0	-33.6	
3.82	-63.4	V	3.0	-15.5	37.3	1.0	-51.7	-13.0	-38.7	
5.73	-65.0	V	3.0	-13.7	36.7	1.0	-49.4	-13.0	-36.4	
7.64	-66.1	V	3.0	-12.4	35.8	1.0	-47.2	-13.0	-34.2	

Rev. 03.19.15

### 10.4.2. CDMA2000

#### CDMA2000 1xRTT, 850MHz BC0

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

Company:  
 Project #: 15U21635  
 Date: 09/09/15  
 Test Engineer: T Wang  
 Configuration: EUT only  
 Mode: 1xRTT 850MHz

Test Equipment:  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

Pre-amplifier

Filter

Limit

3m Chamber H

3m Chamber H

Filter

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (824.7MHz)</b>										
1.65	-62.4	H	3.0	-22.0	37.7	1.0	-58.7	-13.0	-45.7	
2.47	-61.7	H	3.0	-17.7	37.0	1.0	-53.7	-13.0	-40.7	
3.30	-65.0	H	3.0	-17.2	37.9	1.0	-54.1	-13.0	-41.1	
1.65	-62.1	V	3.0	-21.5	37.7	1.0	-58.2	-13.0	-45.2	
2.47	-62.3	V	3.0	-18.2	37.0	1.0	-54.2	-13.0	-41.2	
3.30	-64.4	V	3.0	-17.6	37.9	1.0	-54.5	-13.0	-41.5	
<b>Mid Channel (836.52MHz)</b>										
1.67	-58.6	H	3.0	-18.0	37.8	1.0	-54.8	-13.0	-41.8	
2.51	-60.8	H	3.0	-16.7	37.1	1.0	-52.7	-13.0	-39.7	
3.33	-64.5	H	3.0	-16.7	37.8	1.0	-53.5	-13.0	-40.5	
1.67	-59.5	V	3.0	-18.7	37.8	1.0	-55.5	-13.0	-42.5	
2.51	-59.7	V	3.0	-15.5	37.1	1.0	-51.6	-13.0	-38.6	
3.33	-64.5	V	3.0	-17.6	37.8	1.0	-54.5	-13.0	-41.5	
<b>High Channel (848.31MHz)</b>										
1.70	-58.8	H	3.0	-18.1	37.8	1.0	-54.8	-13.0	-41.8	
2.55	-59.5	H	3.0	-15.1	37.2	1.0	-51.3	-13.0	-38.3	
3.39	-65.0	H	3.0	-17.2	37.8	1.0	-53.9	-13.0	-40.9	
1.70	-58.5	V	3.0	-17.6	37.8	1.0	-54.4	-13.0	-41.4	
2.55	-58.7	V	3.0	-14.4	37.2	1.0	-50.5	-13.0	-37.5	
3.39	-64.7	V	3.0	-17.7	37.8	1.0	-54.4	-13.0	-41.4	

Rev. 03.19.15

**EVDO-Rev A, 850MHz BC0**

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/14/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** Rev 0/A 850MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

Pre-amplifier

Filter

Limit

3m Chamber H

3m Chamber H

Filter

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (824.7MHz)</b>										
1.65	-61.7	H	3.0	-21.3	37.7	1.0	-58.0	-13.0	-45.0	
2.47	-62.1	H	3.0	-18.1	37.0	1.0	-54.1	-13.0	-41.1	
3.30	-64.9	H	3.0	-17.1	37.9	1.0	-54.0	-13.0	-41.0	
1.65	-61.4	V	3.0	-20.8	37.7	1.0	-57.5	-13.0	-44.5	
2.47	-62.0	V	3.0	-17.9	37.0	1.0	-53.9	-13.0	-40.9	
3.30	-64.8	V	3.0	-18.0	37.9	1.0	-54.9	-13.0	-41.9	
<b>Mid Channel (836.52MHz)</b>										
1.67	-59.3	H	3.0	-18.7	37.8	1.0	-55.5	-13.0	-42.5	
2.51	-61.0	H	3.0	-16.9	37.1	1.0	-52.9	-13.0	-39.9	
3.33	-64.4	H	3.0	-16.6	37.8	1.0	-53.4	-13.0	-40.4	
1.67	-60.1	V	3.0	-19.3	37.8	1.0	-56.1	-13.0	-43.1	
2.51	-60.3	V	3.0	-16.1	37.1	1.0	-52.2	-13.0	-39.2	
3.33	-65.0	V	3.0	-18.1	37.8	1.0	-55.0	-13.0	-42.0	
<b>High Channel (848.31MHz)</b>										
1.70	-59.2	H	3.0	-18.5	37.8	1.0	-55.2	-13.0	-42.2	
2.55	-60.1	H	3.0	-15.7	37.2	1.0	-51.9	-13.0	-38.9	
3.39	-64.6	H	3.0	-16.8	37.8	1.0	-53.5	-13.0	-40.5	
1.70	-59.0	V	3.0	-18.1	37.8	1.0	-54.9	-13.0	-41.9	
2.55	-59.3	V	3.0	-15.0	37.2	1.0	-51.1	-13.0	-38.1	
3.39	-65.0	V	3.0	-18.0	37.8	1.0	-54.7	-13.0	-41.7	

Rev. 03.19.15

**CDMA2000 1xRTT, 1900MHz BC1**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/09/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** 1xRTT 1900MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1851.25MHz)</b>										
3.70	-62.5	H	3.0	-14.6	37.4	1.0	-51.0	-13.0	-38.0	
5.55	-65.2	H	3.0	-14.3	36.7	1.0	-50.0	-13.0	-37.0	
7.41	-67.0	H	3.0	-13.3	36.0	1.0	-48.3	-13.0	-35.3	
3.70	-64.1	V	3.0	-16.4	37.4	1.0	-52.8	-13.0	-39.8	
5.55	-64.8	V	3.0	-13.8	36.7	1.0	-49.5	-13.0	-36.5	
7.41	-66.8	V	3.0	-13.3	36.0	1.0	-48.3	-13.0	-35.3	
<b>Mid Channel (1880MHz)</b>										
3.76	-63.2	H	3.0	-15.2	37.4	1.0	-51.6	-13.0	-38.6	
5.64	-65.2	H	3.0	-14.1	36.7	1.0	-49.8	-13.0	-36.8	
7.52	-66.8	H	3.0	-13.0	35.9	1.0	-47.9	-13.0	-34.9	
3.76	-63.4	V	3.0	-15.6	37.4	1.0	-51.9	-13.0	-38.9	
5.64	-64.0	V	3.0	-12.8	36.7	1.0	-48.6	-13.0	-35.6	
7.52	-64.4	V	3.0	-10.8	35.9	1.0	-45.7	-13.0	-32.7	
<b>High Channel (1908.75MHz)</b>										
3.82	-60.5	H	3.0	-12.5	37.3	1.0	-48.8	-13.0	-35.8	
5.73	-65.4	H	3.0	-14.2	36.7	1.0	-49.9	-13.0	-36.9	
7.64	-65.6	H	3.0	-11.6	35.8	1.0	-46.4	-13.0	-33.4	
3.82	-63.1	V	3.0	-15.2	37.3	1.0	-51.5	-13.0	-38.5	
5.73	-65.5	V	3.0	-14.2	36.7	1.0	-49.9	-13.0	-36.9	
7.64	-67.0	V	3.0	-13.3	35.8	1.0	-48.1	-13.0	-35.1	

Rev. 03.19.15

**EVDO-Rev A, 1900MHz BC1**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/14/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** Rev 0/A 1900MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1851.25MHz)</b>										
3.70	-61.8	H	3.0	-13.9	37.4	1.0	-50.3	-13.0	-37.3	
5.55	-64.9	H	3.0	-14.0	36.7	1.0	-49.7	-13.0	-36.7	
7.41	-66.6	H	3.0	-12.9	36.0	1.0	-47.9	-13.0	-34.9	
3.70	-63.5	V	3.0	-15.8	37.4	1.0	-52.2	-13.0	-39.2	
5.55	-65.0	V	3.0	-14.0	36.7	1.0	-49.7	-13.0	-36.7	
7.41	-66.2	V	3.0	-12.7	36.0	1.0	-47.7	-13.0	-34.7	
<b>Mid Channel (1880MHz)</b>										
3.76	-62.7	H	3.0	-14.7	37.4	1.0	-51.1	-13.0	-38.1	
5.64	-65.0	H	3.0	-13.9	36.7	1.0	-49.6	-13.0	-36.6	
7.52	-65.8	H	3.0	-12.0	35.9	1.0	-46.9	-13.0	-33.9	
3.76	-62.5	V	3.0	-14.7	37.4	1.0	-51.0	-13.0	-38.0	
5.64	-64.6	V	3.0	-13.4	36.7	1.0	-49.2	-13.0	-36.2	
7.52	-65.1	V	3.0	-11.5	35.9	1.0	-46.4	-13.0	-33.4	
<b>High Channel (1908.75MHz)</b>										
3.82	-61.1	H	3.0	-13.1	37.3	1.0	-49.4	-13.0	-36.4	
5.73	-64.8	H	3.0	-13.6	36.7	1.0	-49.3	-13.0	-36.3	
7.64	-65.2	H	3.0	-11.2	35.8	1.0	-46.0	-13.0	-33.0	
3.82	-62.7	V	3.0	-14.8	37.3	1.0	-51.1	-13.0	-38.1	
5.73	-65.1	V	3.0	-13.8	36.7	1.0	-49.5	-13.0	-36.5	
7.64	-66.7	V	3.0	-13.0	35.8	1.0	-47.8	-13.0	-34.8	

Rev. 03.19.15

**CDMA2000 1xRTT, 1700MHz BC15**

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/09/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** 1xRTT 1700MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

Pre-amplifier

Filter

Limit

3m Chamber H

3m Chamber H

Filter

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1711.25MHz)</b>										
3.42	-64.0	H	3.0	-16.2	37.7	1.0	-52.9	-13.0	-39.9	
5.13	-65.5	H	3.0	-15.3	36.8	1.0	-51.1	-13.0	-38.1	
6.85	-65.1	H	3.0	-12.1	36.4	1.0	-47.5	-13.0	-34.5	
3.42	-65.3	V	3.0	-18.2	37.7	1.0	-55.0	-13.0	-42.0	
5.13	-62.1	V	3.0	-11.7	36.8	1.0	-47.5	-13.0	-34.5	
6.85	-66.0	V	3.0	-13.1	36.4	1.0	-48.6	-13.0	-35.6	
<b>Mid Channel (1732.5MHz)</b>										
3.47	-64.0	H	3.0	-16.1	37.7	1.0	-52.8	-13.0	-39.8	
5.20	-65.1	H	3.0	-14.7	36.8	1.0	-50.6	-13.0	-37.6	
6.93	-66.4	H	3.0	-13.2	36.4	1.0	-48.6	-13.0	-35.6	
3.47	-64.3	V	3.0	-17.1	37.7	1.0	-53.8	-13.0	-40.8	
5.20	-62.1	V	3.0	-11.6	36.8	1.0	-47.4	-13.0	-34.4	
6.93	-65.8	V	3.0	-12.8	36.4	1.0	-48.2	-13.0	-35.2	
<b>High Channel (1753.75MHz)</b>										
3.51	-64.0	H	3.0	-16.1	37.6	1.0	-52.8	-13.0	-39.8	
5.26	-64.5	H	3.0	-14.0	36.8	1.0	-49.8	-13.0	-36.8	
7.02	-66.6	H	3.0	-13.3	36.4	1.0	-48.7	-13.0	-35.7	
3.51	-63.7	V	3.0	-16.4	37.6	1.0	-53.1	-13.0	-40.1	
5.26	-63.5	V	3.0	-12.9	36.8	1.0	-48.7	-13.0	-35.7	
7.02	-64.7	V	3.0	-11.6	36.4	1.0	-47.0	-13.0	-34.0	

Rev. 03.19.15

**EVDO-Rev A, 1700MHz BC15**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/14/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** Rev 0/A, 1700MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1711.25MHz)</b>										
3.42	-63.6	H	3.0	-15.8	37.7	1.0	-52.5	-13.0	-39.5	
5.13	-65.2	H	3.0	-15.0	36.8	1.0	-50.8	-13.0	-37.8	
6.85	-64.7	H	3.0	-11.7	36.4	1.0	-47.1	-13.0	-34.1	
3.42	-64.4	V	3.0	-17.3	37.7	1.0	-54.1	-13.0	-41.1	
5.13	-63.0	V	3.0	-12.6	36.8	1.0	-48.4	-13.0	-35.4	
6.85	-66.3	V	3.0	-13.4	36.4	1.0	-48.9	-13.0	-35.9	
<b>Mid Channel (1732.5MHz)</b>										
3.47	-63.5	H	3.0	-15.6	37.7	1.0	-52.3	-13.0	-39.3	
5.20	-65.2	H	3.0	-14.8	36.8	1.0	-50.7	-13.0	-37.7	
6.93	-66.6	H	3.0	-13.4	36.4	1.0	-48.8	-13.0	-35.8	
3.47	-63.9	V	3.0	-16.7	37.7	1.0	-53.4	-13.0	-40.4	
5.20	-63.0	V	3.0	-12.5	36.8	1.0	-48.3	-13.0	-35.3	
6.93	-66.1	V	3.0	-13.1	36.4	1.0	-48.5	-13.0	-35.5	
<b>High Channel (1753.75MHz)</b>										
3.51	-63.4	H	3.0	-15.5	37.6	1.0	-52.2	-13.0	-39.2	
5.26	-65.1	H	3.0	-14.6	36.8	1.0	-50.4	-13.0	-37.4	
7.02	-66.3	H	3.0	-13.0	36.4	1.0	-48.4	-13.0	-35.4	
3.51	-62.9	V	3.0	-15.6	37.6	1.0	-52.3	-13.0	-39.3	
5.26	-64.1	V	3.0	-13.5	36.8	1.0	-49.3	-13.0	-36.3	
7.02	-65.3	V	3.0	-12.2	36.4	1.0	-47.6	-13.0	-34.6	

Rev. 03.19.15

**CDMA2000 1xRTT, 800MHz BC10**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/09/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** 1xRTT 800MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (817.25MHz)</b>										
1.63	-60.8	H	3.0	-20.5	37.7	1.0	-57.2	-13.0	-44.2	
2.45	-60.4	H	3.0	-16.5	37.0	1.0	-52.5	-13.0	-39.5	
3.27	-64.6	H	3.0	-16.8	37.9	1.0	-53.7	-13.0	-40.7	
1.63	-63.1	V	3.0	-22.5	37.7	1.0	-59.3	-13.0	-46.3	
2.45	-59.5	V	3.0	-15.4	37.0	1.0	-51.4	-13.0	-38.4	
3.27	-64.8	V	3.0	-18.1	37.9	1.0	-55.0	-13.0	-42.0	
<b>Mid Channel (820MHz)</b>										
1.64	-62.2	H	3.0	-21.9	37.7	1.0	-58.6	-13.0	-45.6	
2.46	-60.1	H	3.0	-16.1	37.0	1.0	-52.2	-13.0	-39.2	
3.28	-65.2	H	3.0	-17.4	37.9	1.0	-54.3	-13.0	-41.3	
1.64	-62.0	V	3.0	-21.4	37.7	1.0	-58.1	-13.0	-45.1	
2.46	-61.1	V	3.0	-17.0	37.0	1.0	-53.0	-13.0	-40.0	
3.28	-65.3	V	3.0	-18.5	37.9	1.0	-55.4	-13.0	-42.4	
<b>High Channel (822.75MHz)</b>										
1.65	-62.5	H	3.0	-22.1	37.7	1.0	-58.9	-13.0	-45.9	
2.47	-58.6	H	3.0	-14.6	37.0	1.0	-50.7	-13.0	-37.7	
3.29	-64.8	H	3.0	-17.0	37.9	1.0	-53.9	-13.0	-40.9	
4.11	-62.4	H	3.0	-14.1	37.1	1.0	-50.2	-13.0	-37.2	
1.65	-59.7	V	3.0	-19.1	37.7	1.0	-55.8	-13.0	-42.8	
2.47	-60.5	V	3.0	-16.4	37.0	1.0	-52.4	-13.0	-39.4	
3.29	-64.9	V	3.0	-18.1	37.9	1.0	-55.0	-13.0	-42.0	

Rev. 03.19.15

**EVDO-Rev A, 800MHz BC10**

### High Frequency Substitution Measurement UL Fremont Radiated Chamber

**Company:**  
**Project #:** 15U21635  
**Date:** 09/14/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** Rev 0/A, 800MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

**Chamber**  
 3m Chamber H

**Pre-amplifier**  
 3m Chamber H

**Filter**  
 Filter

**Limit**  
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (817.25MHz)</b>										
1.63	-61.4	H	3.0	-21.1	37.7	1.0	-57.8	-13.0	-44.8	
2.45	-61.8	H	3.0	-17.9	37.0	1.0	-53.9	-13.0	-40.9	
3.27	-64.2	H	3.0	-16.4	37.9	1.0	-53.3	-13.0	-40.3	
1.63	-62.7	V	3.0	-22.1	37.7	1.0	-58.9	-13.0	-45.9	
2.45	-60.3	V	3.0	-16.2	37.0	1.0	-52.2	-13.0	-39.2	
3.27	-65.0	V	3.0	-18.3	37.9	1.0	-55.2	-13.0	-42.2	
<b>Mid Channel (820MHz)</b>										
1.64	-61.6	H	3.0	-21.3	37.7	1.0	-58.0	-13.0	-45.0	
2.46	-60.8	H	3.0	-16.8	37.0	1.0	-52.9	-13.0	-39.9	
3.28	-64.5	H	3.0	-16.7	37.9	1.0	-53.6	-13.0	-40.6	
1.64	-62.1	V	3.0	-21.5	37.7	1.0	-58.2	-13.0	-45.2	
2.46	-61.5	V	3.0	-17.4	37.0	1.0	-53.4	-13.0	-40.4	
3.28	-65.1	V	3.0	-18.3	37.9	1.0	-55.2	-13.0	-42.2	
<b>High Channel (822.75MHz)</b>										
1.65	-62.2	H	3.0	-21.8	37.7	1.0	-58.6	-13.0	-45.6	
2.47	-59.4	H	3.0	-15.4	37.0	1.0	-51.5	-13.0	-38.5	
3.29	-65.0	H	3.0	-17.2	37.9	1.0	-54.1	-13.0	-41.1	
1.65	-59.9	V	3.0	-19.3	37.7	1.0	-56.0	-13.0	-43.0	
2.47	-60.6	V	3.0	-16.5	37.0	1.0	-52.5	-13.0	-39.5	
3.29	-64.4	V	3.0	-17.6	37.9	1.0	-54.5	-13.0	-41.5	

Rev. 03.19.15

### 10.4.3. UMTS

#### UMTS REL 99, 850MHz BAND 5

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

Company: 15U21635  
 Project #: 15U21635  
 Date: 09/10/15  
 Test Engineer: T Wang  
 Configuration: EUT only  
 Mode: REL 99, 850MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

Pre-amplifier

Filter

Limit

3m Chamber H

3m Chamber H

Filter

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (826.4MHz)</b>										
1.65	-65.1	H	3.0	-24.7	37.7	1.0	-61.4	-13.0	-48.4	
2.48	-65.0	H	3.0	-21.0	37.1	1.0	-57.0	-13.0	-44.0	
3.30	-64.3	H	3.0	-16.5	37.9	1.0	-53.4	-13.0	-40.4	
1.65	-63.2	V	3.0	-22.6	37.7	1.0	-59.3	-13.0	-46.3	
2.48	-63.8	V	3.0	-19.7	37.1	1.0	-55.7	-13.0	-42.7	
3.30	-65.0	V	3.0	-18.2	37.9	1.0	-55.1	-13.0	-42.1	
<b>Mid Channel (836.6MHz)</b>										
1.67	-63.0	H	3.0	-22.5	37.8	1.0	-59.2	-13.0	-46.2	
2.50	-63.2	H	3.0	-19.1	37.1	1.0	-55.2	-13.0	-42.2	
3.35	-65.2	H	3.0	-17.4	37.8	1.0	-54.2	-13.0	-41.2	
1.67	-60.6	V	3.0	-19.8	37.8	1.0	-56.6	-13.0	-43.6	
2.50	-64.8	V	3.0	-20.6	37.1	1.0	-56.7	-13.0	-43.7	
3.35	-64.3	V	3.0	-17.4	37.8	1.0	-54.2	-13.0	-41.2	
<b>High Channel (846.6MHz)</b>										
1.70	-64.2	H	3.0	-23.4	37.8	1.0	-60.2	-13.0	-47.2	
2.54	-61.6	H	3.0	-17.2	37.2	1.0	-53.4	-13.0	-40.4	
3.39	-64.6	H	3.0	-16.8	37.8	1.0	-53.5	-13.0	-40.5	
1.70	-61.5	V	3.0	-20.6	37.8	1.0	-57.3	-13.0	-44.3	
1.86	-62.2	V	3.0	-20.3	37.9	1.0	-57.2	-13.0	-44.2	
3.39	-63.5	V	3.0	-16.5	37.8	1.0	-53.3	-13.0	-40.3	

Rev. 03.19.15

**UMTS HSDPA, 850MHz BAND 5**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

Company:  
 Project #: 15U21635  
 Date: 09/10/15  
 Test Engineer: T Wang  
 Configuration: EUT only  
 Mode: HSPA 850MHz

Test Equipment:  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (826.4MHz)</b>										
1.65	-64.2	H	3.0	-23.8	37.7	1.0	-60.5	-13.0	-47.5	
2.48	-64.1	H	3.0	-20.1	37.1	1.0	-56.1	-13.0	-43.1	
3.30	-65.4	H	3.0	-17.6	37.9	1.0	-54.5	-13.0	-41.5	
1.65	-63.3	V	3.0	-22.7	37.7	1.0	-59.4	-13.0	-46.4	
2.48	-64.4	V	3.0	-20.3	37.1	1.0	-56.3	-13.0	-43.3	
3.30	-64.7	V	3.0	-17.9	37.9	1.0	-54.8	-13.0	-41.8	
<b>Mid Channel (836.6MHz)</b>										
1.67	-63.4	H	3.0	-22.9	37.8	1.0	-59.6	-13.0	-46.6	
2.50	-63.3	H	3.0	-19.2	37.1	1.0	-55.3	-13.0	-42.3	
3.35	-64.7	H	3.0	-16.9	37.8	1.0	-53.7	-13.0	-40.7	
1.67	-63.2	V	3.0	-22.4	37.8	1.0	-59.2	-13.0	-46.2	
2.50	-64.3	V	3.0	-20.1	37.1	1.0	-56.2	-13.0	-43.2	
3.35	-64.9	V	3.0	-18.0	37.8	1.0	-54.8	-13.0	-41.8	
<b>High Channel (846.6MHz)</b>										
1.70	-63.8	H	3.0	-23.0	37.8	1.0	-59.8	-13.0	-46.8	
2.54	-64.2	H	3.0	-19.8	37.2	1.0	-56.0	-13.0	-43.0	
3.39	-64.4	H	3.0	-16.6	37.8	1.0	-53.3	-13.0	-40.3	
1.70	-62.1	V	3.0	-21.2	37.8	1.0	-57.9	-13.0	-44.9	
2.54	-64.1	V	3.0	-19.8	37.2	1.0	-55.9	-13.0	-42.9	
3.39	-64.3	V	3.0	-17.3	37.8	1.0	-54.1	-13.0	-41.1	

Rev. 03.19.15

**UMTS REL 99, 1900MHz BAND 2**

### High Frequency Substitution Measurement

#### UL Fremont Radiated Chamber

**Company:**  
**Project #:** 15U21635  
**Date:** 09/09/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** REL 99, 1900MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber H

Pre-amplifier

3m Chamber H

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1852.4MHz)</b>										
3.70	-63.6	H	3.0	-15.7	37.4	1.0	-52.1	-13.0	-39.1	
5.56	-65.3	H	3.0	-14.3	36.7	1.0	-50.1	-13.0	-37.1	
7.41	-66.8	H	3.0	-13.1	36.0	1.0	-48.1	-13.0	-35.1	
3.70	-63.5	V	3.0	-15.8	37.4	1.0	-52.2	-13.0	-39.2	
5.56	-64.3	V	3.0	-13.2	36.7	1.0	-49.0	-13.0	-36.0	
7.41	-66.2	V	3.0	-12.7	36.0	1.0	-47.7	-13.0	-34.7	
<b>Mid Channel (1880MHz)</b>										
3.76	-63.7	H	3.0	-15.7	37.4	1.0	-52.1	-13.0	-39.1	
5.64	-65.2	H	3.0	-14.1	36.7	1.0	-49.8	-13.0	-36.8	
7.52	-66.0	H	3.0	-12.2	35.9	1.0	-47.1	-13.0	-34.1	
3.76	-63.4	V	3.0	-15.6	37.4	1.0	-51.9	-13.0	-38.9	
5.64	-64.5	V	3.0	-13.3	36.7	1.0	-49.1	-13.0	-36.1	
7.52	-65.0	V	3.0	-11.4	35.9	1.0	-46.3	-13.0	-33.3	
<b>High Channel (1907.6MHz)</b>										
3.82	-63.1	H	3.0	-15.1	37.3	1.0	-51.4	-13.0	-38.4	
5.72	-65.0	H	3.0	-13.8	36.7	1.0	-49.5	-13.0	-36.5	
7.63	-66.4	H	3.0	-12.4	35.8	1.0	-47.3	-13.0	-34.3	
3.82	-63.2	V	3.0	-15.3	37.3	1.0	-51.5	-13.0	-38.5	
5.72	-63.4	V	3.0	-12.1	36.7	1.0	-47.8	-13.0	-34.8	
7.63	-66.2	V	3.0	-12.5	35.8	1.0	-47.3	-13.0	-34.3	

Rev. 03.19.15

**UMTS HSDPA, 1900MHz BAND 2**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/09/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** HSPA 1900MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1852.4MHz)</b>										
3.70	-63.4	H	3.0	-15.5	37.4	1.0	-51.9	-13.0	-38.9	
5.56	-64.8	H	3.0	-13.8	36.7	1.0	-49.6	-13.0	-36.6	
7.41	-67.3	H	3.0	-13.6	36.0	1.0	-48.6	-13.0	-35.6	
3.70	-63.3	V	3.0	-15.6	37.4	1.0	-52.0	-13.0	-39.0	
5.56	-64.8	V	3.0	-13.7	36.7	1.0	-49.5	-13.0	-36.5	
7.41	-66.4	V	3.0	-12.9	36.0	1.0	-47.9	-13.0	-34.9	
<b>Mid Channel (1880MHz)</b>										
3.76	-64.0	H	3.0	-16.0	37.4	1.0	-52.4	-13.0	-39.4	
5.64	-64.7	H	3.0	-13.6	36.7	1.0	-49.3	-13.0	-36.3	
7.52	-66.6	H	3.0	-12.8	35.9	1.0	-47.7	-13.0	-34.7	
3.76	-63.4	V	3.0	-15.6	37.4	1.0	-51.9	-13.0	-38.9	
5.64	-64.5	V	3.0	-13.3	36.7	1.0	-49.1	-13.0	-36.1	
7.52	-66.3	V	3.0	-12.7	35.9	1.0	-47.6	-13.0	-34.6	
<b>High Channel (1907.6MHz)</b>										
3.82	-63.5	H	3.0	-15.5	37.3	1.0	-51.8	-13.0	-38.8	
5.72	-65.6	H	3.0	-14.4	36.7	1.0	-50.1	-13.0	-37.1	
7.63	-66.6	H	3.0	-12.6	35.8	1.0	-47.5	-13.0	-34.5	
3.82	-63.8	V	3.0	-15.9	37.3	1.0	-52.1	-13.0	-39.1	
5.72	-65.8	V	3.0	-14.5	36.7	1.0	-50.2	-13.0	-37.2	
7.63	-66.3	V	3.0	-12.6	35.8	1.0	-47.4	-13.0	-34.4	

Rev. 03.19.15

**UMTS REL 99, 1700MHz BAND 4**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/08/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** REL 99, 1700MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1712.4MHz)</b>										
3.42	-65.1	H	3.0	-17.3	37.7	1.0	-54.0	-13.0	-41.0	
5.14	-65.4	H	3.0	-15.1	36.8	1.0	-51.0	-13.0	-38.0	
6.85	-66.1	H	3.0	-13.1	36.4	1.0	-48.5	-13.0	-35.5	
3.42	-65.0	V	3.0	-17.9	37.7	1.0	-54.7	-13.0	-41.7	
5.14	-66.1	V	3.0	-15.7	36.8	1.0	-51.5	-13.0	-38.5	
6.85	-66.0	V	3.0	-13.1	36.4	1.0	-48.6	-13.0	-35.6	
<b>Mid Channel (1732.6MHz)</b>										
3.47	-64.3	H	3.0	-16.4	37.7	1.0	-53.1	-13.0	-40.1	
5.20	-65.0	H	3.0	-14.6	36.8	1.0	-50.5	-13.0	-37.5	
6.93	-65.4	H	3.0	-12.2	36.4	1.0	-47.6	-13.0	-34.6	
3.47	-65.0	V	3.0	-17.8	37.7	1.0	-54.5	-13.0	-41.5	
5.20	-65.4	V	3.0	-14.8	36.8	1.0	-50.7	-13.0	-37.7	
6.93	-66.0	V	3.0	-13.0	36.4	1.0	-48.4	-13.0	-35.4	
<b>High Channel (1752.6MHz)</b>										
3.51	-65.3	H	3.0	-17.4	37.6	1.0	-54.1	-13.0	-41.1	
5.26	-66.2	H	3.0	-15.7	36.8	1.0	-51.5	-13.0	-38.5	
7.01	-66.2	H	3.0	-12.9	36.4	1.0	-48.3	-13.0	-35.3	
3.51	-64.8	V	3.0	-17.5	37.6	1.0	-54.2	-13.0	-41.2	
5.26	-65.0	V	3.0	-14.4	36.8	1.0	-50.2	-13.0	-37.2	
7.01	-66.2	V	3.0	-13.1	36.4	1.0	-48.5	-13.0	-35.5	

Rev. 03.19.15

**UMTS HSDPA, 1700MHz BAND 4**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/09/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** HSDPA 1700MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1712.4MHz)</b>										
3.42	-65.0	H	3.0	-17.2	37.7	1.0	-53.9	-13.0	-40.9	
5.14	-65.3	H	3.0	-15.0	36.8	1.0	-50.9	-13.0	-37.9	
6.85	-65.1	H	3.0	-12.1	36.4	1.0	-47.5	-13.0	-34.5	
3.42	-65.3	V	3.0	-18.2	37.7	1.0	-55.0	-13.0	-42.0	
5.14	-65.1	V	3.0	-14.7	36.8	1.0	-50.5	-13.0	-37.5	
6.85	-66.2	V	3.0	-13.3	36.4	1.0	-48.8	-13.0	-35.8	
<b>Mid Channel (1732.6MHz)</b>										
3.47	-65.0	H	3.0	-17.1	37.7	1.0	-53.8	-13.0	-40.8	
5.20	-65.3	H	3.0	-14.9	36.8	1.0	-50.8	-13.0	-37.8	
6.93	-66.1	H	3.0	-12.9	36.4	1.0	-48.3	-13.0	-35.3	
3.47	-64.6	V	3.0	-17.4	37.7	1.0	-54.1	-13.0	-41.1	
5.20	-65.2	V	3.0	-14.6	36.8	1.0	-50.5	-13.0	-37.5	
6.93	-66.0	V	3.0	-13.0	36.4	1.0	-48.4	-13.0	-35.4	
<b>High Channel (1752.6MHz)</b>										
3.51	-65.2	H	3.0	-17.3	37.6	1.0	-54.0	-13.0	-41.0	
5.26	-65.6	H	3.0	-15.1	36.8	1.0	-50.9	-13.0	-37.9	
7.01	-66.0	H	3.0	-12.7	36.4	1.0	-48.1	-13.0	-35.1	
3.51	-65.1	V	3.0	-17.8	37.6	1.0	-54.5	-13.0	-41.5	
5.26	-62.1	V	3.0	-11.5	36.8	1.0	-47.3	-13.0	-34.3	
7.01	-66.2	V	3.0	-13.1	36.4	1.0	-48.5	-13.0	-35.5	

Rev. 03.19.15

## 10.5. FIELD STRENGTH OF SPURIOUS RADIATION (UAT)

### 10.5.1. GSM

#### GPRS, 850MHz BAND 5

**High Frequency Substitution Measurement**  
 UL Fremont Radiated Chamber

**Company:**  
**Project #:** 15U21635  
**Date:** Sept. 10, 2015  
**Test Engineer:** W. Chie  
**Configuration:** EUT Only  
**Mode:** GPRS 850MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber  
3m Chamber H

Pre-amplifier  
3m Chamber H

Filter  
Filter

Limit  
EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (824.2MHz)</b>										
1.65	-57.2	H	3.0	-16.8	37.7	1.0	-53.6	-13.0	-40.6	
2.47	-57.1	H	3.0	-13.1	37.0	1.0	-49.2	-13.0	-36.2	
3.30	-64.2	H	3.0	-16.4	37.9	1.0	-53.3	-13.0	-40.3	
1.65	-56.0	V	3.0	-15.4	37.7	1.0	-52.1	-13.0	-39.1	
2.47	-63.4	V	3.0	-19.3	37.0	1.0	-55.3	-13.0	-42.3	
3.30	-63.4	V	3.0	-16.6	37.9	1.0	-53.5	-13.0	-40.5	
<b>Mid Channel (836.6MHz)</b>										
1.67	-60.5	H	3.0	-19.9	37.8	1.0	-56.7	-13.0	-43.7	
2.51	-56.9	H	3.0	-12.7	37.1	1.0	-48.8	-13.0	-35.8	
3.35	-64.3	H	3.0	-16.5	37.8	1.0	-53.3	-13.0	-40.3	
1.67	-54.3	V	3.0	-13.5	37.8	1.0	-50.3	-13.0	-37.3	
2.51	-59.4	V	3.0	-15.2	37.1	1.0	-51.2	-13.0	-38.2	
3.35	-63.5	V	3.0	-16.6	37.8	1.0	-53.4	-13.0	-40.4	
<b>High Channel (848.8MHz)</b>										
1.70	-62.8	H	3.0	-22.1	37.8	1.0	-58.9	-13.0	-45.9	
2.55	-51.8	H	3.0	-7.4	37.2	1.0	-43.6	-13.0	-30.6	
3.40	-64.8	H	3.0	-17.0	37.7	1.0	-53.7	-13.0	-40.7	
1.70	-57.5	V	3.0	-16.6	37.8	1.0	-53.4	-13.0	-40.4	
2.55	-59.9	V	3.0	-15.5	37.2	1.0	-51.7	-13.0	-38.7	
3.40	-63.6	V	3.0	-16.6	37.7	1.0	-53.3	-13.0	-40.3	

Rev. 03.19.15

**EGPRS, 850MHz BAND 5**

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** Sept. 10, 2015  
**Test Engineer:** W. Chie  
**Configuration:** EUT Only  
**Mode:** EGPRS 850MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber H

Pre-amplifier

3m Chamber H

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (824.2MHz)</b>										
1.65	-59.3	H	3.0	-18.9	37.7	1.0	-55.7	-13.0	-42.7	
2.47	-64.3	H	3.0	-20.3	37.0	1.0	-56.3	-13.0	-43.3	
3.30	-65.5	H	3.0	-17.7	37.9	1.0	-54.6	-13.0	-41.6	
1.65	-56.1	V	3.0	-15.4	37.7	1.0	-52.2	-13.0	-39.2	
2.47	-63.6	V	3.0	-19.5	37.0	1.0	-55.5	-13.0	-42.5	
3.30	-64.0	V	3.0	-17.2	37.9	1.0	-54.1	-13.0	-41.1	
<b>Mid Channel (836.6MHz)</b>										
1.67	-60.3	H	3.0	-19.8	37.8	1.0	-56.5	-13.0	-43.5	
2.51	-65.0	H	3.0	-20.9	37.1	1.0	-56.9	-13.0	-43.9	
3.35	-65.3	H	3.0	-17.5	37.8	1.0	-54.3	-13.0	-41.3	
1.67	-54.6	V	3.0	-13.8	37.8	1.0	-50.6	-13.0	-37.6	
2.51	-64.1	V	3.0	-19.9	37.1	1.0	-56.0	-13.0	-43.0	
3.35	-64.6	V	3.0	-17.7	37.8	1.0	-54.5	-13.0	-41.5	
<b>High Channel (848.8MHz)</b>										
1.70	-60.2	H	3.0	-19.4	37.8	1.0	-56.2	-13.0	-43.2	
2.55	-61.3	H	3.0	-16.9	37.2	1.0	-53.0	-13.0	-40.0	
3.40	-65.0	H	3.0	-17.2	37.7	1.0	-53.9	-13.0	-40.9	
1.70	-57.7	V	3.0	-16.8	37.8	1.0	-53.5	-13.0	-40.5	
2.55	-63.4	V	3.0	-19.0	37.2	1.0	-55.2	-13.0	-42.2	
3.40	-63.1	V	3.0	-16.1	37.7	1.0	-52.8	-13.0	-39.8	

Rev. 03.19.15

**GPRS, 1900MHz BAND 2**

### High Frequency Substitution Measurement

#### UL Fremont Radiated Chamber

**Company:**  
**Project #:** 15U21635  
**Date:** 09/16/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** GPRS 1900MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

**Chamber**

3m Chamber H

**Pre-amplifier**

3m Chamber H

**Filter**

Filter

**Limit**

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (HV)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1850.2MHz)</b>										
3.70	-63.4	H	3.0	-15.5	37.4	1.0	-51.9	-13.0	-38.9	
5.55	-64.7	H	3.0	-13.8	36.7	1.0	-49.5	-13.0	-36.5	
7.40	-65.3	H	3.0	-11.6	36.0	1.0	-46.6	-13.0	-33.6	
3.70	-62.6	V	3.0	-14.9	37.4	1.0	-51.3	-13.0	-38.3	
5.55	-64.5	V	3.0	-13.5	36.7	1.0	-49.2	-13.0	-36.2	
7.40	-65.6	V	3.0	-12.1	36.0	1.0	-47.1	-13.0	-34.1	
<b>Mid Channel (1880.0)</b>										
3.76	-63.5	H	3.0	-15.5	37.4	1.0	-51.9	-13.0	-38.9	
5.64	-64.3	H	3.0	-13.2	36.7	1.0	-48.9	-13.0	-35.9	
7.52	-65.7	H	3.0	-11.9	35.9	1.0	-46.8	-13.0	-33.8	
3.76	-61.2	V	3.0	-13.4	37.4	1.0	-49.7	-13.0	-36.7	
5.64	-63.5	V	3.0	-12.3	36.7	1.0	-48.1	-13.0	-35.1	
7.22	-62.7	V	3.0	-9.4	36.2	1.0	-44.6	-13.0	-31.6	
7.52	-64.5	V	3.0	-10.9	35.9	1.0	-45.8	-13.0	-32.8	
<b>High Channel (1909.8MHz)</b>										
3.82	-63.7	H	3.0	-15.7	37.3	1.0	-52.0	-13.0	-39.0	
5.73	-64.3	H	3.0	-13.1	36.7	1.0	-48.8	-13.0	-35.8	
7.64	-65.5	H	3.0	-11.5	35.8	1.0	-46.3	-13.0	-33.3	
3.82	-63.3	V	3.0	-15.4	37.3	1.0	-51.6	-13.0	-38.6	
5.73	-64.0	V	3.0	-12.7	36.7	1.0	-48.4	-13.0	-35.4	
7.64	-65.0	V	3.0	-11.3	35.8	1.0	-46.1	-13.0	-33.1	

Rev. 03.19.15

**EGPRS, 1900MHz BAND 2**

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

Company:  
 Project #: 15U21635  
 Date: 09/16/15  
 Test Engineer: T Wang  
 Configuration: EUT only  
 Mode: EGPRS 1900MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

Pre-amplifier

Filter

Limit

3m Chamber H

3m Chamber H

Filter

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1850.2MHz)</b>										
3.70	-63.2	H	3.0	-15.3	37.4	1.0	-51.7	-13.0	-38.7	
5.55	-64.8	H	3.0	-13.9	36.7	1.0	-49.6	-13.0	-36.6	
7.40	-65.7	H	3.0	-12.0	36.0	1.0	-47.0	-13.0	-34.0	
3.70	-63.5	V	3.0	-15.8	37.4	1.0	-52.2	-13.0	-39.2	
5.55	-64.2	V	3.0	-13.2	36.7	1.0	-48.9	-13.0	-35.9	
7.40	-64.4	V	3.0	-10.9	36.0	1.0	-45.9	-13.0	-32.9	
<b>Mid Channel (1880.0)</b>										
3.76	-62.8	H	3.0	-14.8	37.4	1.0	-51.2	-13.0	-38.2	
5.64	-65.0	H	3.0	-13.9	36.7	1.0	-49.6	-13.0	-36.6	
7.52	-65.6	H	3.0	-11.8	35.9	1.0	-46.7	-13.0	-33.7	
3.76	-62.4	V	3.0	-14.6	37.4	1.0	-50.9	-13.0	-37.9	
5.64	-64.4	V	3.0	-13.2	36.7	1.0	-49.0	-13.0	-36.0	
7.52	-65.6	V	3.0	-12.0	35.9	1.0	-46.9	-13.0	-33.9	
<b>High Channel (1909.8MHz)</b>										
3.82	-63.7	H	3.0	-15.7	37.3	1.0	-52.0	-13.0	-39.0	
5.73	-64.8	H	3.0	-13.6	36.7	1.0	-49.3	-13.0	-36.3	
7.64	-65.1	H	3.0	-11.1	35.8	1.0	-45.9	-13.0	-32.9	
3.82	-63.5	V	3.0	-15.6	37.3	1.0	-51.8	-13.0	-38.8	
5.73	-64.6	V	3.0	-13.3	36.7	1.0	-49.0	-13.0	-36.0	
7.64	-65.8	V	3.0	-12.1	35.8	1.0	-46.9	-13.0	-33.9	

Rev. 03.19.15

### 10.5.2. CDMA2000

#### CDMA2000 1xRTT, 850MHz BC0

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

Company: 15U21635  
 Project #: 15U21635  
 Date: 09/11/15  
 Test Engineer: T Wang  
 Configuration: EUT only  
 Mode: 1xRTT 850MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

Pre-amplifier

Filter

Limit

3m Chamber G

3m Chamber G

Filter

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (824.7MHz)</b>										
1.65	-64.0	H	3.0	-22.5	37.8	1.0	-59.4	-13.0	-46.4	
2.47	-64.3	H	3.0	-21.2	36.6	1.0	-56.7	-13.0	-43.7	
3.30	-65.0	H	3.0	-19.1	36.5	1.0	-54.6	-13.0	-41.6	
1.65	-64.2	V	3.0	-22.4	37.8	1.0	-59.3	-13.0	-46.3	
2.47	-64.1	V	3.0	-20.1	36.6	1.0	-55.7	-13.0	-42.7	
3.30	-65.0	V	3.0	-19.1	36.5	1.0	-54.6	-13.0	-41.6	
<b>Mid Channel (836.52MHz)</b>										
1.68	-64.0	H	3.0	-22.5	37.8	1.0	-59.3	-13.0	-46.3	
2.51	-63.7	H	3.0	-20.5	36.4	1.0	-55.9	-13.0	-42.9	
3.33	-64.3	H	3.0	-18.3	36.5	1.0	-53.8	-13.0	-40.8	
1.68	-64.0	V	3.0	-22.2	37.8	1.0	-59.0	-13.0	-46.0	
2.51	-63.8	V	3.0	-19.6	36.4	1.0	-54.9	-13.0	-41.9	
3.33	-64.3	V	3.0	-18.3	36.5	1.0	-53.8	-13.0	-40.8	
<b>High Channel (848.31MHz)</b>										
1.70	-64.8	H	3.0	-23.3	37.8	1.0	-60.1	-13.0	-47.1	
2.55	-62.6	H	3.0	-19.2	36.4	1.0	-54.6	-13.0	-41.6	
3.39	-64.7	H	3.0	-18.6	36.4	1.0	-54.0	-13.0	-41.0	
1.70	-65.0	V	3.0	-23.2	37.8	1.0	-60.0	-13.0	-47.0	
2.55	-63.7	V	3.0	-19.4	36.4	1.0	-54.8	-13.0	-41.8	
3.39	-64.0	V	3.0	-17.8	36.4	1.0	-53.3	-13.0	-40.3	

Rev. 03.19.15

**EVDO-Rev A, 850MHz BC0**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 01/14/16  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** EVDO Rev A, 850MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (824.7MHz)</b>										
1.70	-63.5	H	3.0	-22.0	37.8	1.0	-58.8	-13.0	-45.8	
2.50	-64.1	H	3.0	-20.9	36.4	1.0	-56.2	-13.0	-43.2	
3.45	-64.6	H	3.0	-18.4	36.4	1.0	-53.8	-13.0	-40.8	
1.70	-64.0	V	3.0	-22.1	37.8	1.0	-59.0	-13.0	-46.0	
2.50	-63.4	V	3.0	-19.2	36.4	1.0	-54.5	-13.0	-41.5	
3.45	-64.3	V	3.0	-17.9	36.4	1.0	-53.3	-13.0	-40.3	
<b>Mid Channel (836.52MHz)</b>										
1.72	-63.4	H	3.0	-21.8	37.8	1.0	-58.7	-13.0	-45.7	
2.53	-63.5	H	3.0	-20.2	36.4	1.0	-55.5	-13.0	-42.5	
3.35	-64.1	H	3.0	-18.0	36.5	1.0	-53.5	-13.0	-40.5	
1.72	-63.3	V	3.0	-21.5	37.8	1.0	-58.3	-13.0	-45.3	
2.53	-62.6	V	3.0	-18.3	36.4	1.0	-53.7	-13.0	-40.7	
3.35	-64.1	V	3.0	-18.0	36.5	1.0	-53.5	-13.0	-40.5	
<b>High Channel (848.31MHz)</b>										
1.75	-63.3	H	3.0	-21.7	37.8	1.0	-58.5	-13.0	-45.5	
2.58	-62.4	H	3.0	-18.8	36.4	1.0	-54.3	-13.0	-41.3	
3.44	-64.5	H	3.0	-18.2	36.4	1.0	-53.6	-13.0	-40.6	
1.75	-64.2	V	3.0	-22.4	37.8	1.0	-59.2	-13.0	-46.2	
2.58	-63.2	V	3.0	-18.9	36.4	1.0	-54.3	-13.0	-41.3	
3.44	-63.8	V	3.0	-17.4	36.4	1.0	-52.8	-13.0	-39.8	

Rev. 03.19.15

**CDMA2000 1xRTT, 1900MHz BC1**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/11/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** 1xRTT 1900MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1851.25MHz)</b>										
3.70	-63.7	H	3.0	-15.8	37.4	1.0	-52.2	-13.0	-39.2	
5.55	-65.1	H	3.0	-14.2	36.7	1.0	-49.9	-13.0	-36.9	
7.41	-66.7	H	3.0	-13.0	36.0	1.0	-48.0	-13.0	-35.0	
3.70	-64.0	V	3.0	-16.3	37.4	1.0	-52.7	-13.0	-39.7	
5.55	-64.6	V	3.0	-13.6	36.7	1.0	-49.3	-13.0	-36.3	
7.41	-65.7	V	3.0	-12.2	36.0	1.0	-47.2	-13.0	-34.2	
<b>Mid Channel (1880MHz)</b>										
3.76	-63.5	H	3.0	-15.5	37.4	1.0	-51.9	-13.0	-38.9	
5.64	-64.7	H	3.0	-13.6	36.7	1.0	-49.3	-13.0	-36.3	
7.52	-65.8	H	3.0	-12.0	35.9	1.0	-46.9	-13.0	-33.9	
3.76	-63.6	V	3.0	-15.8	37.4	1.0	-52.1	-13.0	-39.1	
5.64	-64.3	V	3.0	-13.1	36.7	1.0	-48.9	-13.0	-35.9	
7.52	-65.0	V	3.0	-11.4	35.9	1.0	-46.3	-13.0	-33.3	
<b>High Channel (1908.75MHz)</b>										
3.82	-63.0	H	3.0	-15.0	37.3	1.0	-51.3	-13.0	-38.3	
5.73	-64.9	H	3.0	-13.7	36.7	1.0	-49.4	-13.0	-36.4	
7.64	-65.3	H	3.0	-11.3	35.8	1.0	-46.1	-13.0	-33.1	
3.82	-63.2	V	3.0	-15.3	37.3	1.0	-51.5	-13.0	-38.5	
5.73	-65.1	V	3.0	-13.8	36.7	1.0	-49.5	-13.0	-36.5	
7.64	-66.5	V	3.0	-12.8	35.8	1.0	-47.6	-13.0	-34.6	

Rev. 03.19.15

**EVDO-Rev A, 1900MHz BC1**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 01/14/16  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** EVDO Rev A, 1900MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Channel (1851.25MHz)</b>										
3.72	-63.4	H	3.0	-15.5	37.4	1.0	-51.9	-13.0	-38.9	
5.65	-64.3	H	3.0	-13.4	36.7	1.0	-49.1	-13.0	-36.1	
7.50	-65.5	H	3.0	-11.8	36.0	1.0	-46.8	-13.0	-33.8	
3.72	-63.2	V	3.0	-15.5	37.4	1.0	-51.9	-13.0	-38.9	
5.65	-63.8	V	3.0	-12.7	36.7	1.0	-48.5	-13.0	-35.5	
7.50	-64.9	V	3.0	-11.4	36.0	1.0	-46.4	-13.0	-33.4	
<b>Channel (1880MHz)</b>										
3.76	-62.9	H	3.0	-15.0	37.4	1.0	-51.3	-13.0	-38.3	
5.82	-64.1	H	3.0	-13.0	36.7	1.0	-48.8	-13.0	-35.8	
7.56	-65.2	H	3.0	-11.4	35.9	1.0	-46.3	-13.0	-33.3	
3.76	-63.0	V	3.0	-15.2	37.4	1.0	-51.6	-13.0	-38.6	
5.82	-63.7	V	3.0	-12.6	36.7	1.0	-48.3	-13.0	-35.3	
7.56	-64.4	V	3.0	-10.8	35.9	1.0	-45.7	-13.0	-32.7	
<b>Channel (1908.75MHz)</b>										
3.82	-62.4	H	3.0	-14.4	37.3	1.0	-50.7	-13.0	-37.7	
5.73	-64.3	H	3.0	-13.1	36.7	1.0	-48.8	-13.0	-35.8	
7.64	-64.7	H	3.0	-10.8	35.8	1.0	-45.6	-13.0	-32.6	
3.82	-62.6	V	3.0	-14.7	37.3	1.0	-51.0	-13.0	-38.0	
5.73	-64.5	V	3.0	-13.2	36.7	1.0	-48.9	-13.0	-35.9	
7.64	-65.9	V	3.0	-12.2	35.8	1.0	-47.0	-13.0	-34.0	

Rev. 03.19.15

**CDMA2000 1xRTT, 1700MHz BC15**

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

Company:  
 Project #: 15U21635  
 Date: 09/11/15  
 Test Engineer: T Wang  
 Configuration: EUT only  
 Mode: 1xRTT 1700MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

Pre-amplifier

Filter

Limit

3m Chamber H

3m Chamber H

Filter

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1711.25MHz)</b>										
3.42	-64.8	H	3.0	-17.0	37.7	1.0	-53.7	-13.0	-40.7	
5.13	-64.8	H	3.0	-14.6	36.8	1.0	-50.4	-13.0	-37.4	
6.85	-64.6	H	3.0	-11.6	36.4	1.0	-47.0	-13.0	-34.0	
3.42	-64.4	V	3.0	-17.3	37.7	1.0	-54.1	-13.0	-41.1	
5.13	-64.1	V	3.0	-13.7	36.8	1.0	-49.5	-13.0	-36.5	
6.85	-65.7	V	3.0	-12.8	36.4	1.0	-48.3	-13.0	-35.3	
<b>Mid Channel (1732.5MHz)</b>										
3.47	-63.9	H	3.0	-16.0	37.7	1.0	-52.7	-13.0	-39.7	
5.20	-64.8	H	3.0	-14.4	36.8	1.0	-50.3	-13.0	-37.3	
6.93	-66.0	H	3.0	-12.8	36.4	1.0	-48.2	-13.0	-35.2	
3.47	-64.2	V	3.0	-17.0	37.7	1.0	-53.7	-13.0	-40.7	
5.20	-63.0	V	3.0	-12.4	36.8	1.0	-48.3	-13.0	-35.3	
6.93	-65.4	V	3.0	-12.4	36.4	1.0	-47.8	-13.0	-34.8	
<b>High Channel (1753.75MHz)</b>										
3.51	-64.2	H	3.0	-16.3	37.6	1.0	-53.0	-13.0	-40.0	
5.26	-64.2	H	3.0	-13.7	36.8	1.0	-49.5	-13.0	-36.5	
7.02	-64.9	H	3.0	-11.6	36.4	1.0	-47.0	-13.0	-34.0	
3.51	-64.3	V	3.0	-17.0	37.6	1.0	-53.7	-13.0	-40.7	
5.26	-63.5	V	3.0	-12.9	36.8	1.0	-48.7	-13.0	-35.7	
7.02	-64.6	V	3.0	-11.5	36.4	1.0	-46.9	-13.0	-33.9	

Rev. 03.19.15

**EVDO-Rev A, 1700MHz BC15**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 01/14/16  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** EVDO Rev A 1700MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1711.25MHz)</b>										
3.42	-63.2	H	3.0	-17.0	36.4	1.0	-52.4	-13.0	-39.4	
5.13	-63.2	H	3.0	-13.6	36.3	1.0	-48.9	-13.0	-35.9	
6.85	-63.0	H	3.0	-10.6	35.6	1.0	-45.1	-13.0	-32.1	
3.42	-62.8	V	3.0	-16.5	36.4	1.0	-52.0	-13.0	-39.0	
5.13	-62.5	V	3.0	-13.1	36.3	1.0	-48.4	-13.0	-35.4	
6.85	-64.1	V	3.0	-11.7	35.6	1.0	-46.3	-13.0	-33.3	
<b>Mid Channel (1732.5MHz)</b>										
3.46	-62.3	H	3.0	-16.0	36.4	1.0	-51.4	-13.0	-38.4	
5.20	-63.2	H	3.0	-13.5	36.3	1.0	-48.7	-13.0	-35.7	
6.93	-64.4	H	3.0	-11.8	35.5	1.0	-46.4	-13.0	-33.4	
3.46	-62.6	V	3.0	-16.2	36.4	1.0	-51.6	-13.0	-38.6	
5.20	-61.4	V	3.0	-11.9	36.3	1.0	-47.2	-13.0	-34.2	
6.93	-63.8	V	3.0	-11.3	35.5	1.0	-45.8	-13.0	-32.8	
<b>High Channel (1753.75MHz)</b>										
3.51	-62.6	H	3.0	-16.2	36.4	1.0	-51.6	-13.0	-38.6	
5.30	-62.6	H	3.0	-12.7	36.2	1.0	-47.9	-13.0	-34.9	
7.02	-63.3	H	3.0	-10.6	35.5	1.0	-45.1	-13.0	-32.1	
3.51	-62.7	V	3.0	-16.1	36.4	1.0	-51.5	-13.0	-38.5	
5.30	-61.9	V	3.0	-12.2	36.2	1.0	-47.5	-13.0	-34.5	
7.02	-64.6	V	3.0	-11.9	35.5	1.0	-46.4	-13.0	-33.4	

Rev. 03.19.15

**CDMA2000 1xRTT, 800MHz BC10**

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/11/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** 1xRTT 800MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber  
3m Chamber G

Pre-amplifier  
3m Chamber G

Filter  
Filter

Limit  
EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (817.25MHz)</b>										
1.63	-64.0	H	3.0	-22.6	37.8	1.0	-59.4	-13.0	-46.4	
2.45	-64.5	H	3.0	-21.4	36.7	1.0	-57.1	-13.0	-44.1	
3.27	-65.0	H	3.0	-19.1	36.5	1.0	-54.7	-13.0	-41.7	
1.63	-64.5	V	3.0	-22.7	37.8	1.0	-59.6	-13.0	-46.6	
2.45	-64.4	V	3.0	-20.5	36.7	1.0	-56.3	-13.0	-43.3	
3.27	-64.5	V	3.0	-18.7	36.5	1.0	-54.2	-13.0	-41.2	
3.67	-61.9	V	3.0	-14.9	36.2	1.0	-50.1	-13.0	-37.1	
<b>Mid Channel (820MHz)</b>										
1.64	-64.7	H	3.0	-23.3	37.8	1.0	-60.1	-13.0	-47.1	
2.46	-64.3	H	3.0	-21.2	36.7	1.0	-56.8	-13.0	-43.8	
3.28	-65.1	H	3.0	-19.2	36.5	1.0	-54.7	-13.0	-41.7	
1.64	-64.6	V	3.0	-22.8	37.8	1.0	-59.7	-13.0	-46.7	
2.46	-64.3	V	3.0	-20.4	36.7	1.0	-56.0	-13.0	-43.0	
3.28	-64.8	V	3.0	-19.0	36.5	1.0	-54.5	-13.0	-41.5	
<b>High Channel (822.75MHz)</b>										
1.65	-64.4	H	3.0	-22.9	37.8	1.0	-59.8	-13.0	-46.8	
2.47	-64.3	H	3.0	-21.2	36.6	1.0	-56.7	-13.0	-43.7	
3.29	-64.6	H	3.0	-18.7	36.5	1.0	-54.2	-13.0	-41.2	
1.65	-64.3	V	3.0	-22.5	37.8	1.0	-59.4	-13.0	-46.4	
2.47	-64.2	V	3.0	-20.2	36.6	1.0	-55.8	-13.0	-42.8	
3.29	-64.1	V	3.0	-18.2	36.5	1.0	-53.8	-13.0	-40.8	

Rev. 03.19.15

**EVDO-Rev A, 800MHz BC10**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 01/13/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** EVDO Rev A 800MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (817.25MHz)</b>										
1.63	-61.9	H	3.0	-20.5	37.8	1.0	-57.3	-13.0	-44.3	
2.45	-62.4	H	3.0	-19.3	36.7	1.0	-55.0	-13.0	-42.0	
3.27	-62.9	H	3.0	-17.0	36.5	1.0	-52.6	-13.0	-39.6	
1.63	-62.4	H	3.0	-21.0	37.8	1.0	-57.8	-13.0	-44.8	
2.45	-62.3	V	3.0	-18.4	36.7	1.0	-54.2	-13.0	-41.2	
3.27	-62.4	V	3.0	-16.6	36.5	1.0	-52.1	-13.0	-39.1	
3.67	-59.8	V	3.0	-12.8	36.2	1.0	-48.0	-13.0	-35.0	
<b>Mid Channel (820MHz)</b>										
1.65	-62.6	H	3.0	-21.1	37.8	1.0	-58.0	-13.0	-45.0	
2.46	-62.2	H	3.0	-19.1	36.7	1.0	-54.7	-13.0	-41.7	
3.30	-63.0	H	3.0	-17.1	36.5	1.0	-52.6	-13.0	-39.6	
1.65	-62.5	V	3.0	-20.7	37.8	1.0	-57.6	-13.0	-44.6	
2.46	-62.2	V	3.0	-18.3	36.7	1.0	-53.9	-13.0	-40.9	
3.30	-62.7	V	3.0	-16.8	36.5	1.0	-52.3	-13.0	-39.3	
<b>High Channel (822.75MHz)</b>										
1.65	-62.3	H	3.0	-20.8	37.8	1.0	-57.7	-13.0	-44.7	
2.50	-62.2	H	3.0	-19.0	36.4	1.0	-54.4	-13.0	-41.4	
3.29	-62.5	H	3.0	-16.6	36.5	1.0	-52.1	-13.0	-39.1	
1.65	-62.2	V	3.0	-20.4	37.8	1.0	-57.3	-13.0	-44.3	
2.50	-62.1	V	3.0	-17.9	36.4	1.0	-53.2	-13.0	-40.2	
3.29	-62.0	V	3.0	-16.1	36.5	1.0	-51.7	-13.0	-38.7	

Rev. 03.19.15

### 10.5.3. UMTS

#### UMTS REL 99, 850MHz BAND 5

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

Company:  
 Project #: 15U21635  
 Date: 09/16/15  
 Test Engineer: T Wang  
 Configuration: EUT only  
 Mode: REL 99, 850MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber H

Pre-amplifier

3m Chamber H

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (826.4MHz)</b>										
1.65	-65.2	H	3.0	-24.8	37.7	1.0	-61.5	-13.0	-48.5	
2.48	-64.7	H	3.0	-20.7	37.1	1.0	-56.7	-13.0	-43.7	
3.30	-64.1	H	3.0	-16.3	37.9	1.0	-53.2	-13.0	-40.2	
1.65	-63.7	V	3.0	-23.1	37.7	1.0	-59.8	-13.0	-46.8	
2.48	-64.0	V	3.0	-19.9	37.1	1.0	-55.9	-13.0	-42.9	
3.30	-64.7	V	3.0	-17.9	37.9	1.0	-54.8	-13.0	-41.8	
<b>Mid Channel (836.6MHz)</b>										
1.67	-64.1	H	3.0	-23.6	37.8	1.0	-60.3	-13.0	-47.3	
2.50	-64.2	H	3.0	-20.1	37.1	1.0	-56.2	-13.0	-43.2	
3.35	-64.6	H	3.0	-16.8	37.8	1.0	-53.6	-13.0	-40.6	
1.67	-64.0	V	3.0	-23.2	37.8	1.0	-60.0	-13.0	-47.0	
2.50	-64.1	V	3.0	-19.9	37.1	1.0	-56.0	-13.0	-43.0	
3.35	-64.0	V	3.0	-17.1	37.8	1.0	-53.9	-13.0	-40.9	
<b>High Channel (846.6MHz)</b>										
1.70	-64.3	H	3.0	-23.5	37.8	1.0	-60.3	-13.0	-47.3	
2.54	-62.0	H	3.0	-17.6	37.2	1.0	-53.8	-13.0	-40.8	
3.39	-64.6	H	3.0	-16.8	37.8	1.0	-53.5	-13.0	-40.5	
1.70	-62.2	V	3.0	-21.3	37.8	1.0	-58.0	-13.0	-45.0	
2.54	-62.1	V	3.0	-17.8	37.2	1.0	-53.9	-13.0	-40.9	
3.39	-64.3	V	3.0	-17.3	37.8	1.0	-54.1	-13.0	-41.1	

Rev. 03.19.15

**UMTS HSDPA, 850MHz BAND 5**

**High Frequency Substitution Measurement**  
**UL Fremont Radiated Chamber**

Company:  
 Project #: 15U21635  
 Date: 09/16/15  
 Test Engineer: T Wang  
 Configuration: EUT only  
 Mode: HSDPA 850MHz

Test Equipment:  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

**Chamber**

3m Chamber H

**Pre-amplifier**

3m Chamber H

**Filter**

Filter

**Limit**

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (826.4MHz)</b>										
1.65	-64.4	H	3.0	-24.0	37.7	1.0	-60.7	-13.0	-47.7	
2.48	-64.3	H	3.0	-20.3	37.1	1.0	-56.3	-13.0	-43.3	
3.30	-64.8	H	3.0	-17.0	37.9	1.0	-53.9	-13.0	-40.9	
1.65	-64.8	V	3.0	-24.2	37.7	1.0	-60.9	-13.0	-47.9	
2.48	-63.9	V	3.0	-19.8	37.1	1.0	-55.8	-13.0	-42.8	
3.30	-64.4	V	3.0	-17.6	37.9	1.0	-54.5	-13.0	-41.5	
<b>Mid Channel (836.6MHz)</b>										
1.67	-64.2	H	3.0	-23.7	37.8	1.0	-60.4	-13.0	-47.4	
2.50	-63.5	H	3.0	-19.4	37.1	1.0	-55.5	-13.0	-42.5	
3.35	-64.1	H	3.0	-16.3	37.8	1.0	-53.1	-13.0	-40.1	
1.67	-64.2	V	3.0	-23.4	37.8	1.0	-60.2	-13.0	-47.2	
2.50	-63.2	V	3.0	-19.0	37.1	1.0	-55.1	-13.0	-42.1	
3.35	-64.2	V	3.0	-17.3	37.8	1.0	-54.1	-13.0	-41.1	
<b>High Channel (846.6MHz)</b>										
1.70	-63.5	H	3.0	-22.7	37.8	1.0	-59.5	-13.0	-46.5	
2.54	-63.9	H	3.0	-19.5	37.2	1.0	-55.7	-13.0	-42.7	
3.39	-64.5	H	3.0	-16.7	37.8	1.0	-53.4	-13.0	-40.4	
1.70	-64.1	V	3.0	-23.2	37.8	1.0	-59.9	-13.0	-46.9	
2.54	-62.7	V	3.0	-18.4	37.2	1.0	-54.5	-13.0	-41.5	
3.39	-63.8	V	3.0	-16.8	37.8	1.0	-53.6	-13.0	-40.6	

Rev. 03.19.15

**UMTS REL 99, 1900MHz BAND 2**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/15/15  
**Test Engineer:** J. Vang  
**Configuration:** EUT only  
**Mode:** REL 99, 1900MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifer</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1852.4MHz)</b>										
3.73	-64.8	H	3.0	-18.0	36.2	1.0	-53.2	-13.0	-40.2	
5.60	-66.1	H	3.0	-15.7	36.1	1.0	-50.8	-13.0	-37.8	
8.13	-65.8	H	3.0	-12.1	34.7	1.0	-45.8	-13.0	-32.8	
3.71	-64.7	V	3.0	-17.5	36.2	1.0	-52.7	-13.0	-39.7	
5.65	-65.2	V	3.0	-14.9	36.1	1.0	-50.0	-13.0	-37.0	
7.20	-66.4	V	3.0	-13.6	35.4	1.0	-47.9	-13.0	-34.9	
<b>Mid Channel (1880MHz)</b>										
3.76	-61.2	H	3.0	-14.3	36.2	1.0	-49.5	-13.0	-36.5	
5.65	-63.2	H	3.0	-12.7	36.1	1.0	-47.8	-13.0	-34.8	
7.52	-64.3	H	3.0	-11.1	35.1	1.0	-45.2	-13.0	-32.2	
3.70	-64.4	V	3.0	-17.3	36.2	1.0	-52.5	-13.0	-39.5	
5.61	-66.9	V	3.0	-16.7	36.1	1.0	-51.8	-13.0	-38.8	
7.44	-67.8	V	3.0	-14.8	35.2	1.0	-49.0	-13.0	-36.0	
<b>High Channel (1907.6MHz)</b>										
3.79	-62.3	H	3.0	-15.3	36.2	1.0	-50.5	-13.0	-37.5	
5.72	-64.2	H	3.0	-13.6	36.1	1.0	-48.7	-13.0	-35.7	
7.62	-64.7	H	3.0	-11.4	35.1	1.0	-45.5	-13.0	-32.5	
3.74	-66.4	V	3.0	-19.1	36.2	1.0	-54.3	-13.0	-41.3	
5.69	-68.8	V	3.0	-18.5	36.1	1.0	-53.5	-13.0	-40.5	
7.59	-67.4	V	3.0	-14.2	35.1	1.0	-48.3	-13.0	-35.3	

Rev. 03.19.15

**UMTS HSDPA, 1900MHz BAND 2**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/16/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** HSDPA 1900MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1852.4MHz)</b>										
3.70	-63.5	H	3.0	-15.6	37.4	1.0	-52.0	-13.0	-39.0	
5.56	-64.6	H	3.0	-13.6	36.7	1.0	-49.4	-13.0	-36.4	
7.41	-66.5	H	3.0	-12.8	36.0	1.0	-47.8	-13.0	-34.8	
3.70	-63.1	V	3.0	-15.4	37.4	1.0	-51.8	-13.0	-38.8	
5.56	-64.2	V	3.0	-13.1	36.7	1.0	-48.9	-13.0	-35.9	
7.41	-65.7	V	3.0	-12.2	36.0	1.0	-47.2	-13.0	-34.2	
<b>Mid Channel (1880MHz)</b>										
3.76	-63.7	H	3.0	-15.7	37.4	1.0	-52.1	-13.0	-39.1	
5.65	-64.6	H	3.0	-13.5	36.7	1.0	-49.2	-13.0	-36.2	
7.52	-65.8	H	3.0	-12.0	35.9	1.0	-46.9	-13.0	-33.9	
3.76	-62.9	V	3.0	-15.1	37.4	1.0	-51.4	-13.0	-38.4	
5.65	-63.6	V	3.0	-12.4	36.7	1.0	-48.1	-13.0	-35.1	
7.52	-65.6	V	3.0	-12.0	35.9	1.0	-46.9	-13.0	-33.9	
<b>High Channel (1907.6MHz)</b>										
3.82	-63.3	H	3.0	-15.3	37.3	1.0	-51.6	-13.0	-38.6	
5.72	-65.1	H	3.0	-13.9	36.7	1.0	-49.6	-13.0	-36.6	
7.62	-65.8	H	3.0	-11.8	35.8	1.0	-46.7	-13.0	-33.7	
3.82	-62.7	V	3.0	-14.8	37.3	1.0	-51.0	-13.0	-38.0	
5.72	-64.8	V	3.0	-13.5	36.7	1.0	-49.2	-13.0	-36.2	
7.62	-65.6	V	3.0	-11.9	35.8	1.0	-46.7	-13.0	-33.7	

Rev. 03.19.15

**UMTS REL 99, 1700MHz BAND 4**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/15/15  
**Test Engineer:** J. Vang  
**Configuration:** EUT only  
**Mode:** REL 99, 1700MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1712.4MHz)</b>										
3.71	-65.9	H	3.0	-19.1	36.2	1.0	-54.4	-13.0	-41.4	
5.03	-67.1	H	3.0	-17.7	36.2	1.0	-52.9	-13.0	-39.9	
6.93	-68.1	H	3.0	-15.6	35.5	1.0	-50.1	-13.0	-37.1	
3.79	-65.9	V	3.0	-18.5	36.2	1.0	-53.7	-13.0	-40.7	
5.02	-68.0	V	3.0	-18.7	36.2	1.0	-53.9	-13.0	-40.9	
6.93	-68.7	V	3.0	-16.2	35.5	1.0	-50.7	-13.0	-37.7	
<b>Mid Channel (1732.6MHz)</b>										
3.80	-66.5	H	3.0	-19.6	36.2	1.0	-54.8	-13.0	-41.8	
5.12	-68.4	H	3.0	-18.9	36.3	1.0	-54.1	-13.0	-41.1	
7.00	-68.5	H	3.0	-15.8	35.5	1.0	-50.3	-13.0	-37.3	
3.79	-66.9	V	3.0	-19.5	36.2	1.0	-54.7	-13.0	-41.7	
5.06	-68.1	V	3.0	-18.7	36.3	1.0	-54.0	-13.0	-41.0	
7.07	-68.5	V	3.0	-15.8	35.4	1.0	-50.2	-13.0	-37.2	
<b>High Channel (1752.6MHz)</b>										
3.73	-66.4	H	3.0	-19.6	36.2	1.0	-54.8	-13.0	-41.8	
5.09	-67.4	H	3.0	-17.9	36.3	1.0	-53.1	-13.0	-40.1	
7.02	-69.1	H	3.0	-16.4	35.5	1.0	-50.9	-13.0	-37.9	
3.81	-66.6	V	3.0	-19.2	36.1	1.0	-54.3	-13.0	-41.3	
5.11	-67.8	V	3.0	-18.4	36.3	1.0	-53.7	-13.0	-40.7	
7.15	-68.0	V	3.0	-15.2	35.4	1.0	-49.6	-13.0	-36.6	

Rev. 03.19.15

**UMTS HSDPA, 1700MHz BAND 4**

**High Frequency Substitution Measurement  
 UL Fremont Radiated Chamber**

**Company:**  
**Project #:** 15U21635  
**Date:** 09/16/15  
**Test Engineer:** T Wang  
**Configuration:** EUT only  
**Mode:** HSDPA 1700MHz

**Test Equipment:**  
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

<b>Chamber</b>	<b>Pre-amplifier</b>	<b>Filter</b>	<b>Limit</b>
3m Chamber H	3m Chamber H	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
<b>Low Channel (1712.4MHz)</b>										
3.42	-65.5	H	3.0	-17.7	37.7	1.0	-54.4	-13.0	-41.4	
5.14	-65.8	H	3.0	-15.5	36.8	1.0	-51.4	-13.0	-38.4	
6.85	-66.0	H	3.0	-13.0	36.4	1.0	-48.4	-13.0	-35.4	
3.42	-65.4	V	3.0	-18.3	37.7	1.0	-55.1	-13.0	-42.1	
5.14	-65.7	V	3.0	-15.3	36.8	1.0	-51.1	-13.0	-38.1	
6.85	-66.9	V	3.0	-14.0	36.4	1.0	-49.5	-13.0	-36.5	
<b>Mid Channel (1732.6MHz)</b>										
3.47	-65.4	H	3.0	-17.5	37.7	1.0	-54.2	-13.0	-41.2	
5.20	-65.6	H	3.0	-15.2	36.8	1.0	-51.1	-13.0	-38.1	
6.93	-65.5	H	3.0	-12.3	36.4	1.0	-47.7	-13.0	-34.7	
3.47	-64.8	V	3.0	-17.6	37.7	1.0	-54.3	-13.0	-41.3	
5.20	-65.4	V	3.0	-14.8	36.8	1.0	-50.7	-13.0	-37.7	
6.93	-66.2	V	3.0	-13.2	36.4	1.0	-48.6	-13.0	-35.6	
<b>High Channel (1752.6MHz)</b>										
3.51	-65.6	H	3.0	-17.7	37.6	1.0	-54.4	-13.0	-41.4	
5.26	-65.7	H	3.0	-15.2	36.8	1.0	-51.0	-13.0	-38.0	
7.01	-66.2	H	3.0	-12.9	36.4	1.0	-48.3	-13.0	-35.3	
3.51	-65.4	V	3.0	-18.1	37.6	1.0	-54.8	-13.0	-41.8	
5.26	-64.5	V	3.0	-13.9	36.8	1.0	-49.7	-13.0	-36.7	
7.01	-66.5	V	3.0	-13.4	36.4	1.0	-48.8	-13.0	-35.8	

Rev. 03.19.15