



**FCC CFR47 PART 22H, 24E, 27L, AND 90S
CERTIFICATION TEST REPORT**

FOR

CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL NUMBER: A1661, A1786

FCC ID: BCG-E3087A

REPORT NUMBER: 16U23287-E6V3

ISSUE DATE: JULY 31, 2016

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	07/25/2016	Initial Review	Chin Pang
V2	07/30/2016	Revised report to address TCB's questions , also updated Section 5.2.1 and 7.1.1 due to power updated.	Tina Chu
V3	07/31/2016	updated Section 5.2.1 and 7.1.1	Tina Chu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.2.1. LAT	9
5.2.2. UAT	11
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	13
5.4. SOFTWARE AND FIRMWARE.....	13
5.5. WORST-CASE CONFIGURATION AND MODE	13
5.6. DESCRIPTION OF TEST SETUP.....	14
6. TEST AND MEASUREMENT EQUIPMENT	16
7. RF POWER OUTPUT VERIFICATION	17
7.1. GSM	17
7.1.1. PORT A GPRS/EGPRS (LAT)	19
7.1.2. PORT B GPRS/EGPRS (UAT).....	19
7.2. CDMA200	20
7.2.1. PORT A 1XRTT (LAT)	21
7.2.2. PORT B 1XRTT (UAT).....	24
7.2.3. 1xEV-DO - Release 0 (REV 0).....	27
7.2.4. PORT A 1xEV-DO - REV 0 (LAT)	28
7.2.5. PORT B 1xEV-DO - REV 0 (UAT).....	29
7.3. CDMA2000 1xEV-DO - Revision A (REV A)	30
7.3.1. PORT A 1xEV-DO - REV A (LAT).....	31
7.3.2. PORT B 1xEV-DO - REV A (UAT)	32
7.4. UMTS	33
7.4.1. PORT A UMTS REL99 (LAT).....	34
7.4.2. PORT B UMTS REL99 (UAT)	34
7.5. HSDPA REL 5	35
7.5.1. PORT A HSDPA REL 5 (LAT)	36
7.5.2. PORT B HSDPA REL 5 (UAT).....	37

7.6.	HSPA REL 6 (HSDPA & HSUPA)	38
7.6.1.	PORT A HSPA REL 6 (HSDPA & HSUPA) (LAT)	39
7.6.2.	PORT B HSPA REL 6 (HSDPA & HSUPA) (UAT)	41
7.7.	DUAL CARRIER HSDPA	43
7.7.1.	PORT A DUAL CARRIER HSDPA (LAT)	45
7.7.2.	PORT B DUAL CARRIER HSDPA (UAT)	46
8.	CONDUCTED TEST RESULTS	47
8.1.	OCCUPIED BANDWIDTH	47
8.1.1.	GSM GPRS	51
8.1.2.	GSM EGPRS	54
8.1.3.	CDMA2000 1xRTT	57
8.1.4.	CDMA2000 EVDO Rev. A	63
8.1.5.	UMTS REL 99	69
8.1.6.	UMTS HSDPA	75
8.2.	BAND EDGE	81
8.2.1.	GSM-GPRS	83
8.2.2.	GSM-EGPRS	85
8.2.3.	CDMA2000 1xRTT	87
8.2.4.	CDMA2000 1xRTT BC10 MASK	90
8.2.5.	CDMA2000 EVDO REV A	92
8.2.6.	CDMA2000 EVDO REV A BC10 MASK	95
8.2.7.	UMTS REL 99	97
8.2.8.	UMTS HSDPA	100
8.3.	OUT OF BAND EMISSIONS	103
8.3.1.	GSM-GPRS	105
8.3.2.	GSM-EGPRS	108
8.3.3.	CDMA2000 1xRTT	112
8.3.4.	CDMA2000 EVDO REV A	118
8.3.5.	UMTS REL 99	124
8.3.6.	UMTS HSDPA	130
9.	FREQUENCY STABILITY	136
9.1.	GSM	137
9.2.	CDMA2000	139
9.3.	UMTS	141
10.	RADIATED TEST RESULTS	143
10.1.	RADIATED POWER (ERP & EIRP) (LAT)	143
10.1.1.	GSM	145
10.1.2.	CDMA2000	146
10.1.3.	UMTS	147
10.1.4.	GSM	148
10.1.5.	CDMA2000	152
10.1.6.	UMTS	158
10.2.	RADIATED POWER (ERP & EIRP) (UAT)	164
10.2.1.	GSM	164
10.2.2.	CDMA2000	165
10.2.3.	UMTS	166

10.2.4.	GSM.....	167
10.2.5.	CDMA2000.....	171
10.2.6.	UMTS.....	177
10.3.	PEAK-TO-AVERAGE RATIO	183
10.4.	FIELD STRENGTH OF SPURIOUS RADIATION (LAT)	193
10.4.1.	GSM.....	195
10.4.2.	CDMA2000.....	199
10.4.3.	UMTS.....	205
10.5.	FIELD STRENGTH OF SPURIOUS RADIATION (UAT).....	211
10.5.1.	GSM.....	211
10.5.2.	CDMA2000.....	215
10.5.3.	UMTS.....	221
11.	SETUP PHOTOS	227

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL: A1661, A1786

SERIAL NUMBER: C39RV045HFNN (CONDUCTED); C39RV02LHFNN (RADIATED)

DATE TESTED: FEBRUARY 24, 2016 – JULY 31, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 22H, 24E, 27L, AND 90S	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:



CHIN PANG
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.



FRANCISCO GUARNERO
LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-D, FCC CFR 47 Part 2, FCC CFR 47 Part 22, FCC CFR Part 24, FCC Part 27, FCC Part 90 and FCC KDB 971168 D01 v02r02.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47266 Benicia Street, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☒ Chamber D
☐ Chamber B	☒ Chamber E
☐ Chamber C	☒ Chamber F
	☒ Chamber G
	☐ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable
Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT, Model A1661, A1786 is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/CDMA/EVDO/WCDMA/HSPA+/DC-HSDPA/LTE-radio, IEEE 802.11a/b/g/n/ac, NFC and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum average conducted and ERP / EIRP output powers as follows:

5.2.1. LAT

GSM MODES

Part 22 / RSS 132 850MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)		EIRP (Average)	
		dBm	mW	dBm	mW	dBm	mW
824- 849	GPRS	33.50	2238.7	28.80	758.6	30.95	1244.5
	EGPRS	29.00	794.3	26.11	408.3	28.26	669.9

Part 24 / RSS 133 1900MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 - 1910	GPRS	30.50	1122.0	29.26	843.3
	EGPRS	28.00	631.0	28.14	651.6

CDMA2000 MODES

Part 22 / RSS 132 850MHz

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)		EIRP (Average)	
		dBm	mW	dBm	mW	dBm	mW
824 – 849	CDMA 2000 1xRTT	25.00	316.2	21.40	138.0	23.55	226.5
	CDMA 2000 EVDO-Rev A	25.00	316.2	21.45	139.6	23.60	229.1

Part 90 800MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
816 - 824	CDMA 2000 1xRTT	25.00	316.2	21.09	128.5
	CDMA 2000 EVDO-Rev A	25.00	316.2	21.13	129.7

Part 24 / RSS 133 1900MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 – 1910	CDMA 2000 1xRTT	25.20	331.1	25.10	323.6
	CDMA 2000 EVDO-Rev A	25.20	331.1	25.20	331.1

UMTS MODES

Part 22 / RSS 132 850MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)		EIRP (Average)	
		dBm	mW	dBm	mW	dBm	mW
824 – 849	REL 99	25.00	316.2	20.35	108.4	22.50	177.8
	HSDPA REL 5	24.00	251.2	19.49	88.9	21.64	145.9

Part 24 / RSS 133 1900MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 – 1910	REL 99	25.20	331.1	24.66	292.4
	HSDPA REL 5	24.20	263.0	23.75	237.1

Part 27 /RSS 139 1700MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1710– 1755	REL 99	25.20	331.1	26.86	485.3
	HSDPA REL 5	24.20	263.0	25.98	396.3

5.2.2. UAT

GSM MODES

Part 22 / RSS 132 850MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)		EIRP (Average)	
		dBm	mW	dBm	mW	dBm	mW
824- 849	GPRS	30.50	1122.0	24.39	274.8	26.54	450.8
	EGPRS	24.70	295.1	21.20	131.8	23.35	216.3

Part 24 / RSS 133 1900MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 - 1910	GPRS	25.20	331.1	21.19	131.5
	EGPRS	22.50	177.8	20.53	113.0

CDMA2000 MODES

Part 22 / RSS 132 850MHz

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)		EIRP (Average)	
		dBm	mW	dBm	mW	dBm	mW
824 – 849	CDMA 2000 1xRTT	23.50	223.9	19.08	80.9	21.23	132.7
	CDMA 2000 EVDO-Rev A	23.50	223.9	19.11	81.5	21.26	133.7

Part 90 800MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)	
		dBm	mW	dBm	mW
816 - 824	CDMA 2000 1xRTT	23.50	223.9	18.96	78.7
	CDMA 2000 EVDO-Rev A	23.50	223.9	19.03	80.0

Part 24 / RSS 133 1900MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 – 1910	CDMA 2000 1xRTT	20.50	112.2	20.23	105.4
	CDMA 2000 EVDO-Rev A	20.50	112.2	20.31	107.4

UMTS MODES

Part 22 / RSS 132 850MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		ERP (Average)		EIRP (Average)	
		dBm	mW	dBm	mW	dBm	mW
824 – 849	REL 99	23.00	199.5	17.85	61.0	20.00	100.0
	HSDPA REL 5	22.00	158.5	16.73	47.1	18.88	77.3

Part 24 / RSS 133 1900MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1850 – 1910	REL 99	20.50	112.2	20.53	113.0
	HSDPA REL 5	19.50	89.1	20.29	106.9

Part 27 /RSS 139 1700MHz Band

Frequency range (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
		dBm	mW	dBm	mW
1710– 1755	REL 99	20.50	112.2	20.50	112.2
	HSDPA REL 5	19.50	89.1	20.08	101.9

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Port A (LAT) Antenna Gain (dBi)	Port B (UAT) Antenna Gain (dBi)
816 - 824	-3.44	-3.69
824 - 849	-2.42	-3.65
1850 - 1910	0.49	-1.43
1710 - 1755	-1.08	-1.1

5.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.26.02

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case is EUT on the highest power. Based on Peak Power measurement investigations, the following modes should be considered as worst-case scenario for all other measurements.

Worst-case modes:

- GSM GPRS
- GSM EGPRS
- CDMA 2000 1xRTT
- CDMA 2000 EVDO REV. A
- UMTS REL 99
- UMTS HSDPA

Tests were performed on the conducted test at LAT port as worst case since it has higher output powers.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that Landscape orientation was worst-case orientation for cell bands; Flatbed orientation was worst-case orientation for pcs bands without AC/DC adapter and headset.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC/DC adapter	HP	HSTNN-DA40	WDWR7OBAR9AKS8
Laptop	HP	HP ProBook 450 G2	CND5367Z97
DC power supply	Sorensen	XT 20-3	1318A00530

I/O CABLES (RF Conducted Test)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US 115V	Un-shielded	2m	N/A
2	DC	1	DC	Un-shielded	1.4m	N/A
3	RF In/Out	1	EUT	Un-shielded	0.4m	N/A
4	RF In/Out	1	Barrel	N/A	N/A	N/A
5	RF In/Out	1	Communication Test Set	Un-shielded	1m	N/A

I/O CABLES (RF Radiated Test)


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5m	NA

TEST SETUP

CONDUCTED SETUP

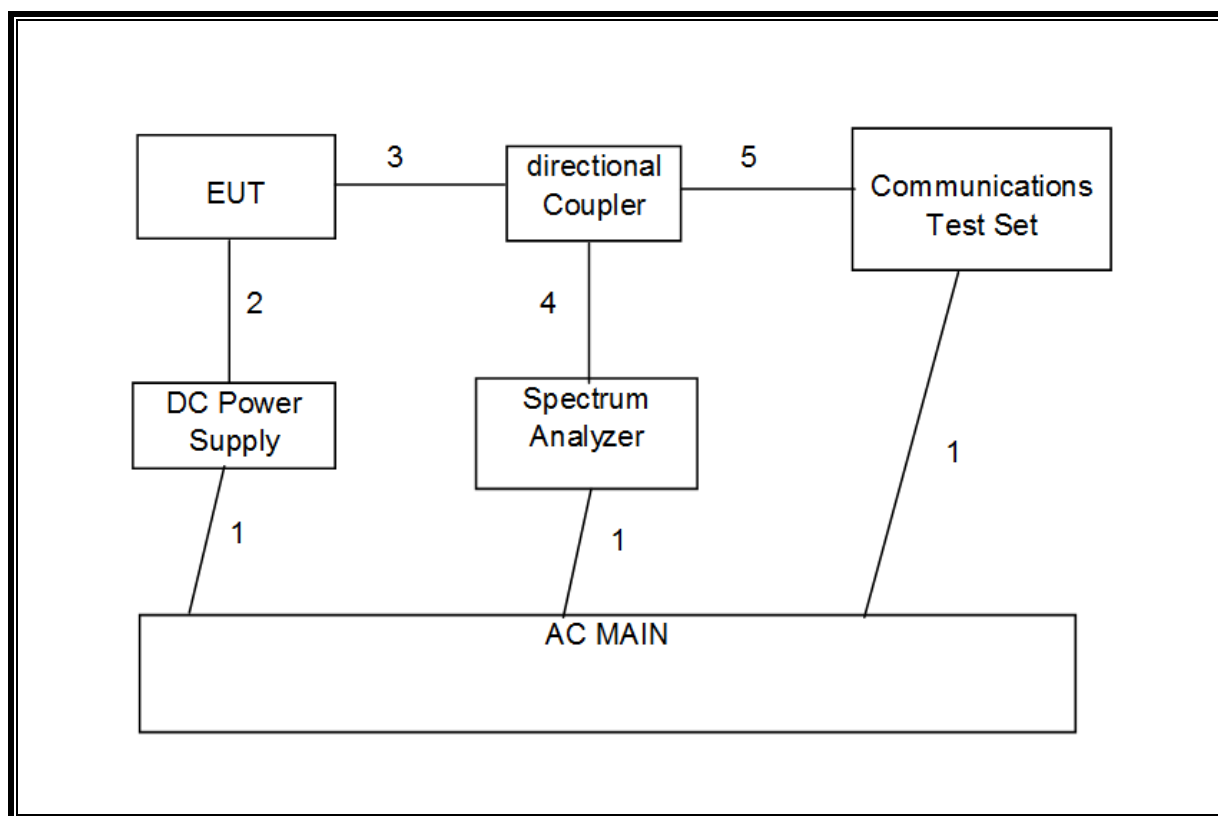

RADIATED SETUP

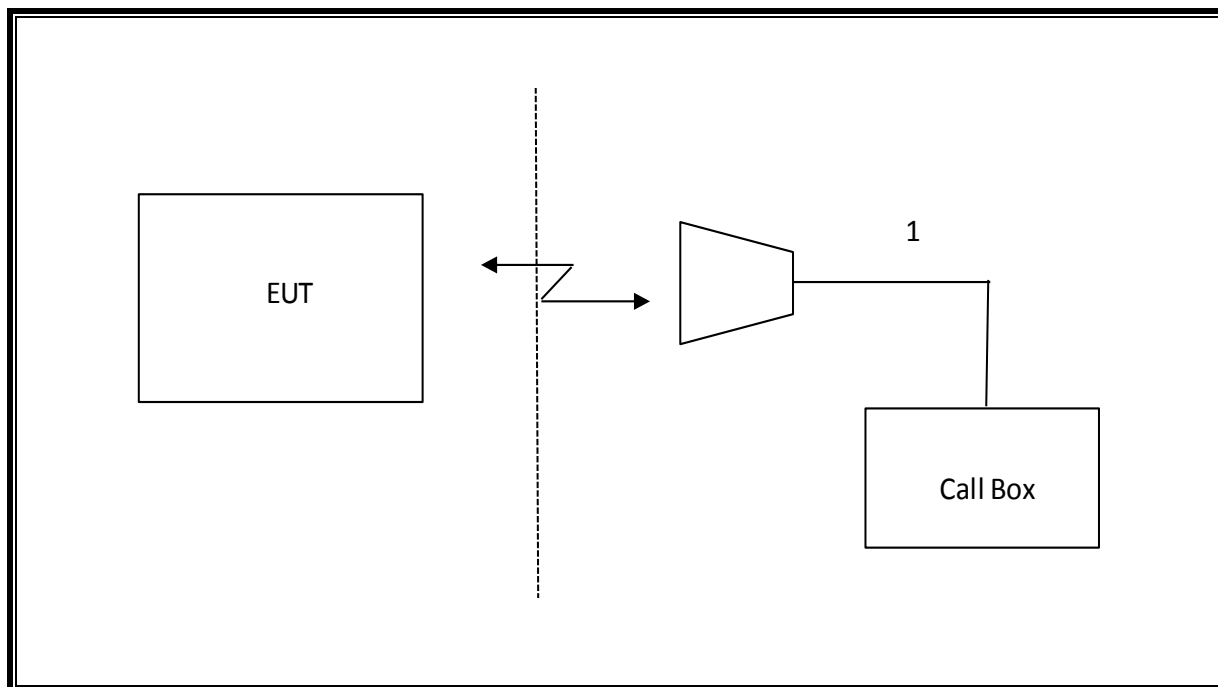

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	T No.	Cal Due
Spectrum Analyzer, PSA, 3Hz to 44GHz	Agilent	E4446A	T123	10/21/16
*Wideband Communication Test Set, Call Box	Rohde & Schwarz	CMW500	T971	07/22/16
*Directional Coupler, 10dB SMA, 0.5GHz to 26.5GHz	Krytar	152610	T922	06/10/16
**P - Series Power Meter	Keysight	N1911A	T1245	05/03/17
*Wideband Power Sensor 50 MHz - 18 GHz	Keysight	N1921A	T1228	06/06/16
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Agilent	E4440A	T200	09/01/16
**Wideband Communication Test Set, Call Box	Rohde & Schwarz	CMW500	T954	05/03/17
**Directional Coupler, 10dB SMA, 0.5GHz to 26.5GHz	Krytar	152613	T1538	04/11/17
Wireless Communications Test Set, 8960 Series 10	Agilent	E5515C	T211	11/18/16
Antenna, Horn 1-18GHz	Emco	3115	T59	11/18/16
**Tuned Dipole, 400 - 1000MHz	ETS Lindgren	3121C DB4	T273 (serial no. 00022117)	05/16/17
*Filter, Highpass 4.0GHz	Micro-Tronics	HPM 13351	T1239	06/24/16
*Filter, HPF 1.2GHz	Wainwright Instruments	WHKX1.2/15G-6ST	T1182	05/31/16
Chamber, Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	T754	09/14/16
**Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	T1466	03/09/17
**Directional Coupler, 10dB SMA, 0.5GHz to 26.5GHz	Krytar	152610	T1161	04/12/17
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	T341	10/14/16
*Wideband Communication Test Set, Call Box	Rohde & Schwarz	CMW500	T260	07/09/16
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	02/22/17
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T712	01/12/17
**Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T185	03/09/17
*Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	3008A04710	06/29/16
*Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	209338	05/18/16
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T742	01/31/17
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T173	06/09/16

*Testing is completed before equipment expiration date.

**Equipment was set to test after calibration service date (equipment calibration cycle is one year).

7. RF POWER OUTPUT VERIFICATION

7.1. GSM

Using CMW500 Communication Test Set

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press **Connection control** to choose the different menus

Press **RESET** > choose all to reset all settings

Connection	Press Signal Off to turn off the signal and change settings Network Support > GSM+GPRS or GSM+EGPRS Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off
MS Signal	Press Slot Config bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850/900 > 27 dBm for EGPRS 850/900 > 30 dBm for GPRS1800/1900 > 26 dBm for EGPRS1800/1900
BS Signal	Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0> 4 dB Slot Config > Unchanged (if already set under MS Signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 (Default)
Network	Coding Scheme > CS 4 (GPRS) and MCS5-9 (EGPRS) Bit Stream > 2E9-1PSR Bit Pattern
AF/RF	Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection	Press Signal On to turn on the signal and change settings

Using Agilent 8960A Communication Test Set

System Config: GSM/GPRS Mobile Test
E1968A A.06.31

Call Params: BCH → Cell Band: GSM850/PCS
TCH → Traffic Band: GSM850/PCS
Traffic Channel: 128/192/251 or 512/661/810
MS Tx Level: 0
PDTCH → Traffic Band: GSM850/PCS
Traffic Channel: 128/192/251 512/661/810
MS Tx Level: 0
Coding Scheme: CS-4 (GPRS)
Coding Scheme: MCS-5 to 9 (EGPRS)
MultiSlot Config: 1up, 1 down (Assuming that the highest
conducted power)

Control: Active Cell → GSM/GPRS

7.1.1. PORT A GPRS/EGPRS (LAT)

ID:	38806	Date:	5/19/16			
Mode	Ch.	f (MHz)	1 time slot		2 time slots	
			Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)
GPRS	128	824.2	33.65	33.50	32.60	32.50
	190	836.6	33.58	33.42	32.50	32.40
	251	848.8	33.46	33.38	32.50	32.40
EGPRS	128	824.2	31.11	29.00	30.08	27.90
	190	836.6	31.02	28.90	30.00	27.80
	251	848.8	31.05	28.93	30.01	27.80
GPRS	512	1850.2	30.63	30.50	29.45	29.45
	661	1880.0	30.51	30.40	29.43	29.40
	810	1909.8	30.42	30.30	29.40	29.40
EGPRS	512	1850.2	30.95	27.93	29.90	26.90
	661	1880.0	31.02	28.00	30.00	26.90
	810	1909.8	30.90	27.87	29.88	26.80

7.1.2. PORT B GPRS/EGPRS (UAT)

ID:	44366	Date:	5/4/16			
Mode	Ch.	f (MHz)	1 time slot		2 time slots	
			Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)
GPRS	128	824.2	30.60	30.50	29.60	29.50
	190	836.6	30.52	30.40	29.55	29.40
	251	848.8	30.50	30.40	29.45	29.30
EGPRS	128	824.2	27.80	24.70	26.70	23.60
	190	836.6	27.10	24.60	26.10	23.50
	251	848.8	27.60	24.50	26.30	23.50
GPRS	512	1850.2	25.30	25.20	24.20	24.10
	661	1880.0	25.20	25.10	24.10	24.00
	810	1909.8	25.20	25.10	24.20	24.10
EGPRS	512	1850.2	25.50	22.40	24.40	21.30
	661	1880.0	25.42	22.30	24.35	21.20
	810	1909.8	25.60	22.50	24.50	21.40

7.2. CDMA200

Maximum output power is verified on the Low, Middle and High channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E for 1xRTT, section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rel. 0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev. A

CDMA2000 1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobile Test	B.15.18, L

- Protocol Rev > 6 (IS-2000-0)
- System ID: 18; NID: 65535, Reg. Ch. #: 610 for Cell, 600 for PCS & 450 for AWS
- Radio Config (RC) > RC1 or RC3
- Service Option (SO) Setup > SO55 or SO32
- Traffic Data Rate > Full
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULT

7.2.1. PORT A 1XRTT (LAT)

ID:	44366	Date:	5/20/16
------------	-------	--------------	---------

1xRTT, BC10, SECONDARY 800

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 450 - 817.25MHz		CH 560 - 820MHz		CH 670 - 822.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.70	24.99	29.15	24.93	29.09	24.94
	55 (Loopback)	29.41	24.90	29.27	24.92	29.06	24.90
RC2	9 (Loopback)	29.72	25.00	29.18	24.94	29.24	24.90
	55 (Loopback)	29.65	24.96	29.20	24.95	29.14	24.90
RC3	2 (Loopback)	29.62	24.92	29.24	24.93	29.12	24.93
	55 (Loopback)	29.71	24.95	29.18	24.94	29.09	24.95
	32 (+ F-SCH)	29.27	24.97	29.22	24.94	29.08	24.93
	32 (+ SCH)	29.14	24.90	29.13	24.93	29.13	24.94
RC4	2 (Loopback)	29.37	24.96	29.20	24.92	29.03	24.93
	55 (Loopback)	29.23	24.90	29.13	24.96	29.20	24.90
	32 (+ F-SCH)	29.34	24.96	29.28	24.97	28.89	24.94
	32 (+ SCH)	29.25	24.92	28.98	24.95	29.24	24.91
RC5	9 (Loopback)	29.14	24.96	29.16	24.92	29.04	24.92
	55 (Loopback)	29.18	24.95	29.17	24.93	29.04	24.90
RC11	2 (Loopback)	29.30	24.90	29.40	24.95	29.50	24.93
	75 (Loopback)	29.40	24.92	29.10	24.98	29.45	24.95
	32 (+ F-SCH)	29.30	24.94	29.35	24.95	29.50	24.92
	32 (+ SCH)	28.90	24.90	29.30	24.96	29.55	24.97

1xRTT, BC0, CELL BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 1013 - 824.7MHz		CH 384 - 836.52MHz		CH 777 - 848.31MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.20	24.80	29.20	24.90	29.01	24.87
	55 (Loopback)	29.25	24.97	29.19	24.94	29.01	24.95
RC2	9 (Loopback)	29.30	25.00	29.16	24.70	29.02	24.91
	55 (Loopback)	29.12	24.80	29.15	24.80	29.06	24.80
RC3	2 (Loopback)	29.11	24.80	29.25	24.80	29.05	24.80
	55 (Loopback)	29.05	24.85	29.20	24.80	29.06	24.70
	32 (+ F-SCH)	29.17	24.96	29.20	24.96	29.07	24.90
	32 (+ SCH)	29.14	24.85	29.21	24.80	29.01	24.80
RC4	2 (Loopback)	29.15	24.85	29.18	24.80	29.03	24.80
	55 (Loopback)	29.26	24.80	29.20	24.80	29.01	24.91
	32 (+ F-SCH)	29.15	24.94	29.24	24.90	28.99	24.96
	32 (+ SCH)	29.02	24.90	29.20	24.80	29.06	24.90
RC5	9 (Loopback)	29.15	24.80	29.21	24.80	29.04	24.95
	55 (Loopback)	29.13	24.90	29.19	24.80	29.04	24.94
RC11	2 (Loopback)	29.20	24.80	29.05	24.80	29.10	24.80
	75 (Loopback)	29.20	24.90	29.10	24.85	29.03	24.80
	32 (+ F-SCH)	29.14	24.90	29.20	24.80	29.04	24.90
	32 (+ SCH)	29.20	24.90	29.03	24.80	29.05	24.84

1xRTT, BC1, PCS BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1851.25MHz		CH 600 - 1880MHz		CH 1175 - 1908.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	29.1	25.0	29.2	25.1	29.1	25.1
	55 (Loopback)	29.0	25.1	29.2	25.1	29.2	25.0
RC2	9 (Loopback)	29.1	25.1	29.4	25.2	29.2	25.2
	55 (Loopback)	29.0	25.1	29.2	25.1	29.2	25.0
RC3	2 (Loopback)	29.0	24.9	29.2	25.1	29.1	25.0
	55 (Loopback)	29.0	24.9	29.2	25.0	29.2	25.1
	32 (+ F-SCH)	29.1	25.1	29.2	25.1	29.2	25.1
	32 (+ SCH)	29.2	24.9	29.2	25.1	29.2	25.1
RC4	2 (Loopback)	29.1	25.1	29.1	25.1	29.1	25.0
	55 (Loopback)	29.1	24.9	29.2	25.0	29.1	25.0
	32 (+ F-SCH)	29.1	25.0	29.2	25.1	29.2	25.1
	32 (+ SCH)	29.1	25.1	29.2	25.1	29.2	25.1
RC5	9 (Loopback)	29.1	24.9	29.1	25.1	29.2	25.0
	55 (Loopback)	29.1	25.1	29.1	25.1	29.2	25.0
RC11	2 (Loopback)	28.9	24.9	28.9	25.0	29.0	25.1
	75 (Loopback)	29.0	24.9	29.0	25.0	28.9	25.1
	32 (+ F-SCH)	29.0	25.1	29.1	25.1	29.0	25.0
	32 (+ SCH)	29.1	25.0	29.1	25.0	29.1	25.1

7.2.2. PORT B 1XRTT (UAT)

ID:	50820	Date:	5/24/16
------------	-------	--------------	---------

1xRTT, BC10, SECONDARY 800

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 450 - 817.25MHz		CH 560 - 820MHz		CH 670 - 822.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	27.45	23.43	27.38	23.40	27.09	23.45
	55 (Loopback)	27.48	23.47	27.36	23.46	27.13	23.45
RC2	9 (Loopback)	27.60	23.50	27.36	23.46	27.10	23.45
	55 (Loopback)	27.48	23.45	27.38	23.40	27.11	23.40
RC3	2 (Loopback)	27.46	23.46	27.39	23.45	27.12	23.36
	55 (Loopback)	27.50	23.40	27.37	23.44	27.11	23.40
	32 (+ F-SCH)	27.51	23.41	27.40	23.30	27.11	23.40
	32 (+ SCH)	27.50	23.40	27.39	23.45	27.10	23.35
RC4	2 (Loopback)	27.51	23.41	27.40	23.45	27.13	23.40
	55 (Loopback)	27.49	23.39	27.40	23.30	27.14	23.42
	32 (+ F-SCH)	27.50	23.40	27.38	23.45	27.13	23.44
	32 (+ SCH)	27.50	23.40	27.37	23.27	27.11	23.40
RC5	9 (Loopback)	27.50	23.40	27.37	23.47	27.12	23.40
	55 (Loopback)	27.53	23.43	27.40	23.30	27.11	23.43
RC11	2 (Loopback)	27.50	23.40	27.38	23.48	27.13	23.44
	75 (Loopback)	27.55	23.45	27.37	23.47	27.12	23.45
	32 (+ F-SCH)	27.49	23.43	27.38	23.45	27.10	23.41
	32 (+ SCH)	27.51	23.41	27.40	23.30	27.11	23.40

1xRTT, BC0, CELL BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 1013 - 824.7MHz		CH 384 - 836.52MHz		CH 777 - 848.31MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	27.70	23.40	27.74	23.44	27.70	23.40
	55 (Loopback)	27.72	23.42	27.75	23.45	27.76	23.46
RC2	9 (Loopback)	27.75	23.45	27.80	23.50	27.70	23.40
	55 (Loopback)	27.70	23.40	27.73	23.43	27.73	23.43
RC3	2 (Loopback)	27.72	23.42	27.75	23.45	27.71	23.41
	55 (Loopback)	27.70	23.40	27.74	23.44	27.70	23.40
	32 (+ F-SCH)	27.75	23.45	27.70	23.40	27.70	23.40
	32 (+ SCH)	27.70	23.40	27.75	23.45	27.73	23.43
RC4	2 (Loopback)	27.77	23.46	27.76	23.46	27.70	23.40
	55 (Loopback)	27.75	23.45	27.72	23.42	27.72	23.42
	32 (+ F-SCH)	27.72	23.42	27.72	23.42	27.72	23.42
	32 (+ SCH)	27.70	23.40	27.70	23.40	27.71	23.41
RC5	9 (Loopback)	27.68	23.38	27.71	23.41	27.72	23.42
	55 (Loopback)	27.70	23.40	27.73	23.43	27.70	23.40
RC11	2 (Loopback)	27.74	23.44	27.71	23.41	27.70	23.40
	75 (Loopback)	27.73	23.43	27.72	23.42	27.71	23.41
	32 (+ F-SCH)	27.72	23.42	27.74	23.44	27.72	23.42
	32 (+ SCH)	27.76	23.46	27.75	23.45	27.74	23.44

1xRTT, BC1, PCS BAND

Radio Configuration (RC)	Service Option (SO)	Conducted Output Power (dBm)					
		CH 25 - 1851.25MHz		CH 600 - 1880MHz		CH 1175 - 1908.75MHz	
		Peak	Average	Peak	Average	Peak	Average
RC1	2 (Loopback)	24.72	20.42	24.75	20.45	24.76	20.46
	55 (Loopback)	24.79	20.49	24.75	20.45	24.77	20.47
RC2	9 (Loopback)	25.00	20.50	24.76	20.48	24.76	20.46
	55 (Loopback)	24.75	20.45	24.76	20.46	24.75	20.45
RC3	2 (Loopback)	24.78	20.48	24.76	20.46	24.75	20.45
	55 (Loopback)	24.71	20.41	24.78	20.48	24.75	20.45
	32 (+ F-SCH)	24.70	20.40	24.75	20.45	24.73	20.43
	32 (+ SCH)	24.74	20.44	24.74	20.44	24.76	20.46
RC4	2 (Loopback)	24.75	20.45	24.75	20.45	24.75	20.45
	55 (Loopback)	24.74	20.44	24.70	20.40	24.74	20.44
	32 (+ F-SCH)	24.74	20.44	24.79	20.49	24.74	20.44
	32 (+ SCH)	24.75	20.45	24.74	20.44	24.74	20.44
RC5	9 (Loopback)	24.77	20.47	24.75	20.45	24.73	20.43
	55 (Loopback)	24.79	20.49	24.77	20.47	24.75	20.45
RC11	2 (Loopback)	24.75	20.45	24.75	20.45	24.74	20.44
	75 (Loopback)	24.70	20.40	24.74	20.44	24.74	20.44
	32 (+ F-SCH)	24.76	20.46	24.77	20.47	24.72	20.42
	32 (+ SCH)	24.79	20.49	24.70	20.40	24.73	20.43

7.2.3. 1xEV-DO - Release 0 (REV 0)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

EVDO Release 0 - RTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

7.2.4. PORT A 1xEV-DO - REV 0 (LAT)

ID:	44366	Date:	5/20/16
------------	-------	--------------	---------

CDMA2000 EVDO REV. 0 800MHz SECONDARY BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	450	817.25	29.75	24.95
		560	820.00	29.80	25.00
		670	822.75	29.73	24.95

CDMA2000 EVDO REV 0 850MHz BAND

FTAP Rate	RTAP Rate	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2 Kbps (2 slot QPSK)	153.6 Kbps	1013	824.70	29.25	24.90
		384	836.52	29.30	24.98
		777	848.31	29.23	24.90

CDMA2000 EVDO REV 0 1900MHz BAND

FTAP Rate	RTAP Rate	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2 Kbps (2 slot QPSK)	153.6 Kbps	25	1851.25	29.23	25.10
		600	1880.00	29.35	25.18
		1175	1908.75	29.25	25.14

7.2.5. PORT B 1xEV-DO - REV 0 (UAT)

ID:	44366	Date:	5/4/16
------------	-------	--------------	--------

CDMA2000 EVDO REV. 0 800MHz SECONDARY BAND

FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted Output Power (dBm)	
				Peak	Average
307.2 kbps (2 Slot QPSK)	153.6 kbps	450	817.25	27.30	23.40
		560	820.00	27.40	23.45
		670	822.75	27.35	23.40

CDMA2000 EVDO REV 0 850MHz BAND

FTAP Rate	RTAP Rate	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2 Kbps (2 slot QPSK)	153.6 Kbps	1013	824.70	27.70	23.40
		384	836.52	27.82	23.48
		777	848.31	27.75	23.45

CDMA2000 EVDO REV 0 1900MHz BAND

FTAP Rate	RTAP Rate	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2 Kbps (2 slot QPSK)	153.6 Kbps	25	1851.25	24.88	20.45
		600	1880.00	25.05	20.47
		1175	1908.75	24.80	20.40

7.3. CDMA2000 1xEV-DO - Revision A (REV A)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
1xEV-DO Terminal Test	A.09.13

EVDO Rev. A – RETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000: 00000000
- > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Rev. A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000: 00000000
- > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULTS

7.3.1. PORT A 1xEV-DO - REV A (LAT)

ID:	44366	Date:	5/20/16
------------	-------	--------------	---------

CDMA2000 EVDO REV A 800MHz SECONDARY BAND

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	450	817.25	29.76	24.98
		560	820.00	29.82	25.00
		670	822.75	29.72	24.95

CDMA2000 EVDO REV A 850MHz BAND

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	1013	824.70	28.70	24.95
		384	836.52	29.40	25.00
		777	848.31	28.70	24.90

CDMA2000 EVDO REV A 1900MHz BAND

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	25	1851.25	29.40	25.15
		600	1880.00	29.50	25.20
		1175	1908.75	29.47	25.16

7.3.2. PORT B 1xEV-DO - REV A (UAT)

ID:	44366	Date:	5/4/16
------------	-------	--------------	--------

CDMA2000 EVDO REV A 800MHz SECONDARY BAND

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	450	817.25	27.42	23.46
		560	820.00	27.70	23.50
		670	822.75	27.50	23.40

CDMA2000 EVDO REV A 850MHz BAND

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	1013	824.70	27.80	23.46
		384	836.52	27.90	23.50
		777	848.31	27.80	23.45

CDMA2000 EVDO REV A 1900MHz BAND

FETAP Traffic Format	RETAP Data Payload Size	Channel	Frequency (MHz)	Peak Conducted Power (dBm)	Average Conducted Power (dBm)
307.2k, QPSK / ACK channel is transmitted at all the slots	4096	25	1851.25	25.10	20.45
		600	1880.00	25.20	20.50
		1175	1908.75	25.04	20.42

7.4. UMTS

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with $VBW \geq RBW \geq 26dB$ BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

UMTS REL99

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
	β_{ed}	Not Applicable

RESULTS

7.4.1. PORT A UMTS REL99 (LAT)

ID:	38806	Date:	5/19/16
------------	-------	--------------	---------

Part 22 / RSS 132 850MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 850MHz	4132	4357	826.4	28.70	25.00
	4183	4408	836.6	28.50	24.87
	4233	4458	846.6	28.62	24.95

Part 24 / RSS 133 1900MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 1900MHz	9262	9662	1852.4	29.00	25.12
	9400	9800	1880.0	29.02	25.15
	9538	9938	1907.6	29.12	25.20

Part 27 / RSS 139 1700MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 1700MHz	1312	1537	1712.4	28.80	25.14
	1413	1638	1732.6	28.78	25.11
	1513	1738	1752.6	29.05	25.20

7.4.2. PORT B UMTS REL99 (UAT)

ID:	44366	Date:	5/4/16
------------	-------	--------------	--------

Part 22 / RSS 132 850MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 850MHz	4132	4357	826.4	26.70	23.00
	4183	4408	836.6	26.65	22.85
	4233	4458	846.6	26.55	22.90

Part 24 / RSS 133 1900MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 1900MHz	9262	9662	1852.4	24.50	20.35
	9400	9800	1880.0	24.40	20.40
	9538	9938	1907.6	24.60	20.50

Part 27 / RSS 139 1700MHz Band

Band	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS Rel. 99 1700MHz	1312	1537	1712.4	24.60	20.45
	1413	1638	1732.6	24.70	20.50
	1513	1738	1752.6	24.55	20.40

7.5. HSDPA REL 5

The following 4 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Summary of settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

RESULT

7.5.1. PORT A HSDPA REL 5 (LAT)

ID:	44366	Date:	5/4/16
------------	-------	--------------	--------

Part 22 / RSS 132 850MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 850MHz	1	4132	4357	826.4	27.93	24.00
		4183	4408	836.6	27.80	23.90
		4233	4458	846.6	27.90	23.90
	2	4132	4357	826.4	27.81	23.80
		4183	4408	836.6	27.80	23.90
		4233	4458	846.6	27.50	23.90
	3	4132	4357	826.4	27.20	23.30
		4183	4408	836.6	27.72	23.40
		4233	4458	846.6	27.60	23.35
	4	4132	4357	826.4	27.50	23.40
		4183	4408	836.6	27.30	23.34
		4233	4458	846.6	27.38	23.30

Part 24 / RSS 133 1900MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1900MHz	1	9262	9662	1852.4	28.50	24.20
		9400	9800	1880.0	28.45	24.18
		9538	9938	1907.6	28.40	24.10
	2	9262	9662	1852.4	28.20	24.13
		9400	9800	1880.0	28.28	24.10
		9538	9938	1907.6	28.30	24.05
	3	9262	9662	1852.4	28.10	23.70
		9400	9800	1880.0	28.17	23.60
		9538	9938	1907.6	28.25	23.70
	4	9262	9662	1852.4	28.30	23.65
		9400	9800	1880.0	28.45	23.60
		9538	9938	1907.6	28.43	23.70

Part 27 / RSS 139 1700MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1700MHz	1	1312	1537	1712.4	28.65	24.20
		1413	1638	1732.6	28.55	24.15
		1513	1738	1752.6	28.50	24.10
	2	1312	1537	1712.4	28.52	24.06
		1413	1638	1732.6	28.60	24.12
		1513	1738	1752.6	28.40	24.16
	3	1312	1537	1712.4	28.30	23.70
		1413	1638	1732.6	28.21	23.66
		1513	1738	1752.6	28.10	23.70
	4	1312	1537	1712.4	28.00	23.66
		1413	1638	1732.6	27.92	23.70
		1513	1738	1752.6	27.85	23.64

7.5.2. PORT B HSDPA REL 5 (UAT)

ID:	44366	Date:	5/4/16
------------	-------	--------------	--------

Part 22 / RSS 132 850MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 850MHz	1	4132	4357	826.4	26.00	22.00
		4183	4408	836.6	25.52	21.80
		4233	4458	846.6	25.31	21.75
	2	4132	4357	826.4	25.62	21.77
		4183	4408	836.6	25.73	21.78
		4233	4458	846.6	25.76	21.80
	3	4132	4357	826.4	25.00	21.38
		4183	4408	836.6	25.20	21.42
		4233	4458	846.6	25.30	21.39
	4	4132	4357	826.4	25.97	21.40
		4183	4408	836.6	25.70	21.37
		4233	4458	846.6	25.80	21.30

Part 24 / RSS 133 1900MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1900MHz	1	9262	9662	1852.4	23.55	19.36
		9400	9800	1880.0	23.70	19.38
		9538	9938	1907.6	24.00	19.50
	2	9262	9662	1852.4	23.75	19.48
		9400	9800	1880.0	23.70	19.36
		9538	9938	1907.6	23.75	19.40
	3	9262	9662	1852.4	23.36	18.90
		9400	9800	1880.0	23.31	18.88
		9538	9938	1907.6	23.53	18.96
	4	9262	9662	1852.4	23.17	19.00
		9400	9800	1880.0	23.40	18.94
		9538	9938	1907.6	22.95	18.91

Part 27 / RSS 139 1700MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1700MHz	1	1312	1537	1712.4	23.85	19.50
		1413	1638	1732.6	23.46	19.45
		1513	1738	1752.6	23.80	19.43
	2	1312	1537	1712.4	23.38	19.42
		1413	1638	1732.6	23.08	19.47
		1513	1738	1752.6	23.84	19.46
	3	1312	1537	1712.4	23.03	18.90
		1413	1638	1732.6	23.20	18.89
		1513	1738	1752.6	23.60	19.00
	4	1312	1537	1712.4	23.20	18.83
		1413	1638	1732.6	23.31	18.68
		1513	1738	1752.6	23.43	18.86

7.6. HSPA REL 6 (HSDPA & HSUPA)

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	

RESULTS

7.6.1. PORT A HSPA REL 6 (HSDPA & HSUPA) (LAT)

ID:	38806	Date:	5/19/16
-----	-------	-------	---------

Part 22 / RSS 132 850MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSUPA 850MHz	1	4132	4357	826.4	27.90	23.96
		4183	4408	836.6	27.80	23.90
		4233	4458	846.6	27.80	23.95
	2	4132	4357	826.4	26.80	22.00
		4183	4408	836.6	26.85	21.90
		4233	4458	846.6	26.90	21.85
	3	4132	4357	826.4	27.30	23.00
		4183	4408	836.6	27.40	22.95
		4233	4458	846.6	27.45	22.90
	4	4132	4357	826.4	26.90	22.00
		4183	4408	836.6	26.86	21.93
		4233	4458	846.6	26.87	21.95
	5	4132	4357	826.4	27.70	23.95
		4183	4408	836.6	27.76	23.95
		4233	4458	846.6	27.84	23.95

Part 24 / RSS 133 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 1900MHz (Band 2)	1	9262	9662	1852.4	28.40	24.00
		9400	9800	1880.0	28.20	24.00
		9538	9938	1907.6	28.30	24.07
	2	9262	9662	1852.4	27.00	22.10
		9400	9800	1880.0	26.95	22.00
		9538	9938	1907.6	27.00	22.03
	3	9262	9662	1852.4	27.30	23.00
		9400	9800	1880.0	27.40	23.05
		9538	9938	1907.6	27.55	23.01
	4	9262	9662	1852.4	27.10	22.10
		9400	9800	1880.0	27.05	22.03
		9538	9938	1907.6	27.10	22.06
	5	9262	9662	1852.4	27.85	24.05
		9400	9800	1880.0	27.88	24.01
		9538	9938	1907.6	27.94	24.02

Part 27 / RSS 139 1700MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSUPA 1700MHz	1	1312	1537	1712.4	28.05	24.18
		1413	1638	1732.6	28.44	24.11
		1513	1738	1752.6	28.30	24.13
	2	1312	1537	1712.4	27.10	22.20
		1413	1638	1732.6	27.20	22.15
		1513	1738	1752.6	27.23	22.20
	3	1312	1537	1712.4	27.70	23.20
		1413	1638	1732.6	27.60	23.10
		1513	1738	1752.6	27.40	23.16
	4	1312	1537	1712.4	26.39	22.20
		1413	1638	1732.6	26.49	22.10
		1513	1738	1752.6	26.61	22.15
	5	1312	1537	1712.4	27.92	24.14
		1413	1638	1732.6	27.94	24.10
		1513	1738	1752.6	28.00	24.16

7.6.2. PORT B HSPA REL 6 (HSDPA & HSUPA) (UAT)

ID:	44366	Date:	5/4/16
-----	-------	-------	--------

Part 22 / RSS 132 850MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSUPA 850MHz	1	4132	4357	826.4	25.80	22.00
		4183	4408	836.6	25.70	21.90
		4233	4458	846.6	25.77	21.95
	2	4132	4357	826.4	25.40	20.00
		4183	4408	836.6	25.47	20.02
		4233	4458	846.6	25.30	19.95
	3	4132	4357	826.4	25.20	21.00
		4183	4408	836.6	25.72	20.93
		4233	4458	846.6	25.34	20.80
	4	4132	4357	826.4	25.19	20.00
		4183	4408	836.6	25.06	19.90
		4233	4458	846.6	25.00	19.95
	5	4132	4357	826.4	25.20	21.85
		4183	4408	836.6	25.36	21.90
		4233	4458	846.6	25.57	21.94

Part 24 / RSS 133 1900MHz Band

Band	Subtest	UL Ch	DL Ch	Frequency	Conducted Output Power (dBm)	
					Peak	Average
UMTS HSUPA 1900MHz (Band 2)	1	9262	9662	1852.4	23.50	19.46
		9400	9800	1880.0	23.68	19.48
		9538	9938	1907.6	23.20	19.40
	2	9262	9662	1852.4	22.50	17.50
		9400	9800	1880.0	22.42	17.40
		9538	9938	1907.6	22.62	17.45
	3	9262	9662	1852.4	22.87	18.50
		9400	9800	1880.0	22.72	18.52
		9538	9938	1907.6	22.70	18.50
	4	9262	9662	1852.4	22.35	17.60
		9400	9800	1880.0	22.29	17.55
		9538	9938	1907.6	22.49	17.46
	5	9262	9662	1852.4	22.59	19.40
		9400	9800	1880.0	22.42	19.30
		9538	9938	1907.6	22.45	19.25

Part 27 / RSS 139 1700MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSUPA 1700MHz	1	1312	1537	1712.4	23.40	19.47
		1413	1638	1732.6	23.00	19.40
		1513	1738	1752.6	23.20	19.44
	2	1312	1537	1712.4	22.40	17.50
		1413	1638	1732.6	22.88	17.55
		1513	1738	1752.6	22.59	17.52
	3	1312	1537	1712.4	22.44	18.45
		1413	1638	1732.6	23.08	18.47
		1513	1738	1752.6	22.87	18.50
	4	1312	1537	1712.4	22.28	17.42
		1413	1638	1732.6	22.43	17.40
		1513	1738	1752.6	22.57	17.50
	5	1312	1537	1712.4	22.86	19.40
		1413	1638	1732.6	22.78	19.41
		1513	1738	1752.6	23.04	19.45

7.7. DUAL CARRIER HSDPA

DC-HSDPA (Rel 8, CAT 24)

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0.

A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

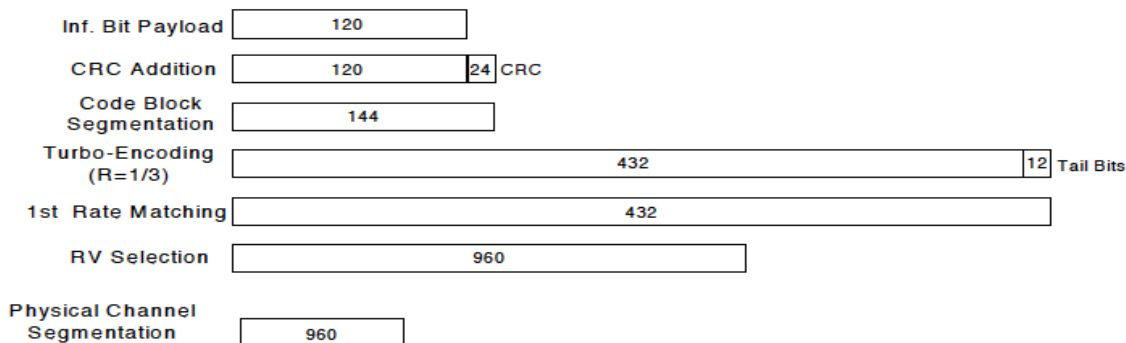


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs = β_{hs}/β_c	30/15			

RESULT

7.7.1. PORT A DUAL CARRIER HSDPA (LAT)

ID:	50820	Date:	6/10/16
------------	-------	--------------	---------

Part 22 / RSS 132 850MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 850MHz	1	4132	4357	826.4	27.88	24.00
		4183	4408	836.6	27.79	23.95
		4233	4458	846.6	27.77	23.96
	2	4132	4357	826.4	27.32	23.93
		4183	4408	836.6	27.70	23.96
		4233	4458	846.6	27.38	23.96
	3	4132	4357	826.4	27.70	23.35
		4183	4408	836.6	27.35	23.45
		4233	4458	846.6	27.49	23.47
	4	4132	4357	826.4	27.69	23.36
		4183	4408	836.6	27.46	23.50
		4233	4458	846.6	27.39	23.44

Part 24 / RSS 133 1900MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1900MHz	1	9262	9662	1852.4	28.40	24.20
		9400	9800	1880.0	27.90	24.18
		9538	9938	1907.6	28.00	24.16
	2	9262	9662	1852.4	27.95	24.07
		9400	9800	1880.0	27.70	24.16
		9538	9938	1907.6	27.75	24.10
	3	9262	9662	1852.4	27.38	23.65
		9400	9800	1880.0	27.59	23.70
		9538	9938	1907.6	27.65	23.66
	4	9262	9662	1852.4	27.35	23.65
		9400	9800	1880.0	27.50	23.62
		9538	9938	1907.6	27.40	23.70

Part 27 / RSS 139 1700MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1700MHz	1	1312	1537	1712.4	27.60	24.19
		1413	1638	1732.6	27.70	24.20
		1513	1738	1752.6	27.44	24.17
	2	1312	1537	1712.4	27.26	24.10
		1413	1638	1732.6	27.60	24.16
		1513	1738	1752.6	27.40	24.16
	3	1312	1537	1712.4	27.50	23.67
		1413	1638	1732.6	27.52	23.60
		1513	1738	1752.6	27.47	23.58
	4	1312	1537	1712.4	27.59	23.68
		1413	1638	1732.6	27.50	23.69
		1513	1738	1752.6	27.45	23.62

7.7.2. PORT B DUAL CARRIER HSDPA (UAT)

ID:	50820	Date:	6/10/16
------------	-------	--------------	---------

Part 22 / RSS 132 850MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 850MHz	1	4132	4357	826.4	25.70	21.97
		4183	4408	836.6	25.40	21.82
		4233	4458	846.6	25.30	21.85
	2	4132	4357	826.4	25.64	21.80
		4183	4408	836.6	25.60	21.85
		4233	4458	846.6	25.47	21.90
	3	4132	4357	826.4	25.69	21.46
		4183	4408	836.6	25.30	21.45
		4233	4458	846.6	25.60	21.40
	4	4132	4357	826.4	25.63	21.44
		4183	4408	836.6	25.60	21.35
		4233	4458	846.6	25.60	21.23

Part 24 / RSS 133 1900MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1900MHz	1	9262	9662	1852.4	23.52	19.48
		9400	9800	1880.0	23.60	19.43
		9538	9938	1907.6	23.75	19.47
	2	9262	9662	1852.4	23.65	19.36
		9400	9800	1880.0	23.60	19.35
		9538	9938	1907.6	23.30	19.37
	3	9262	9662	1852.4	23.40	19.00
		9400	9800	1880.0	23.44	18.95
		9538	9938	1907.6	23.30	18.96
	4	9262	9662	1852.4	23.20	18.95
		9400	9800	1880.0	23.41	18.96
		9538	9938	1907.6	23.40	18.94

Part 27 / RSS 139 1700MHz Band

Band	Subtest	UL Channel	DL Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
UMTS HSDPA 1700MHz	1	1312	1537	1712.4	23.60	19.43
		1413	1638	1732.6	23.78	19.45
		1513	1738	1752.6	23.77	19.42
	2	1312	1537	1712.4	23.47	19.40
		1413	1638	1732.6	23.66	19.43
		1513	1738	1752.6	23.50	19.38
	3	1312	1537	1712.4	23.74	18.89
		1413	1638	1732.6	23.37	18.91
		1513	1738	1752.6	23.40	18.93
	4	1312	1537	1712.4	23.66	18.90
		1413	1638	1732.6	23.43	18.95
		1513	1738	1752.6	23.30	18.80

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

RESULTS

GSM-GPRS MODE PART 22 AND 24 / RSS 132 AND 133

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
CELL	GPRS	128	824.2	244.5844	306.640
		190	836.6	239.6150	306.091
		251	848.8	246.5768	309.374

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
PCS	GPRS	512	1850.2	243.6343	308.482
		661	1880.0	240.3005	307.498
		810	1909.8	239.0306	307.910

GSM-EGPRS MODE PART 22 AND 24 / RSS 132 AND 133

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
CELL	EGPRS	128	824.2	237.5032	305.997
		190	836.6	238.7888	305.283
		251	848.8	237.2200	295.911

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
PCS	EGPRS	512	1850.2	246.1241	310.794
		661	1880.0	242.9600	305.763
		810	1909.8	239.0850	309.272

CDMA2000 1xRTT, PART 22, 24, 27 AND 90/ RSS 132, 133 AND 139

Band	Mode	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
CELL	CDMA 2000 1xRTT	1013	824.70	1.2721	1.416
		384	836.52	1.2717	1.415
		777	848.31	1.2720	1.420
PCS		25	1851.25	1.2721	1.415
		600	1880.00	1.2712	1.423
		1175	1908.75	1.2701	1.418
800 MHz Secondary		450	817.25	1.2731	1.419
		560	820.00	1.2704	1.421
		670	822.75	1.2727	1.417

CDMA2000 EVDO REV A, PART 22, 24, 27 AND 90/ RSS 132, 133 AND 139

Band	Mode	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
CELL	CDMA 2000 EVDO Rev. A	1013	824.70	1.2724	1.419
		384	836.52	1.2744	1.424
		777	848.31	1.2773	1.417
PCS		25	1851.25	1.2780	1.427
		600	1880.00	1.2787	1.437
		1175	1908.75	1.2757	1.423
800 MHz Secondary		450	817.25	1.2722	1.425
		560	820.00	1.2720	1.426
		670	822.75	1.2708	1.419

UMTS REL99 MODE PART 22, 24, AND 27 / RSS 132, 133 AND 139



Band	Mode	DL Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
850MHz	UMTS Rel. 99	4357	826.40	4.0999	4.684
		4408	836.60	4.1340	4.709
		4458	846.60	4.1369	4.718
1900MHz		9662	1852.40	4.1351	4.696
		9800	1880.00	4.1395	4.694
		9938	1907.60	4.1426	4.737
1700MHz		1537	1712.40	4.1663	4.694
		1638	1732.60	4.1425	4.695
		1738	1752.60	4.1344	4.684


UMTS HSDPA MODE PART 22, 24, AND 27 / RSS 132, 133 AND 139

Band	Mode	DL Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
850MHz	UMTS HSDPA	4357	826.40	4.1398	4.679
		4408	836.60	4.1261	4.692
		4458	846.60	4.1356	4.702
1900MHz		9662	1852.40	4.1368	4.711
		9800	1880.00	4.157	4.725
		9938	1907.60	4.1495	4.696
1700MHz		1537	1712.40	4.1509	4.728
		1638	1732.60	4.1394	4.706
		1738	1752.60	4.322	4.904


8.1.1. GSM GPRS



850MHz BAND

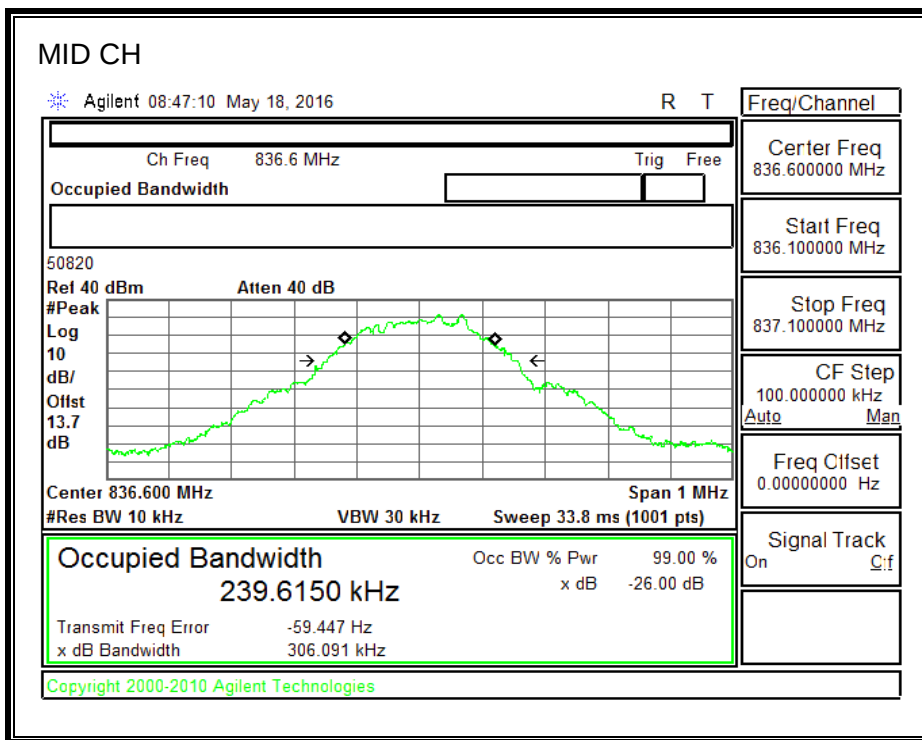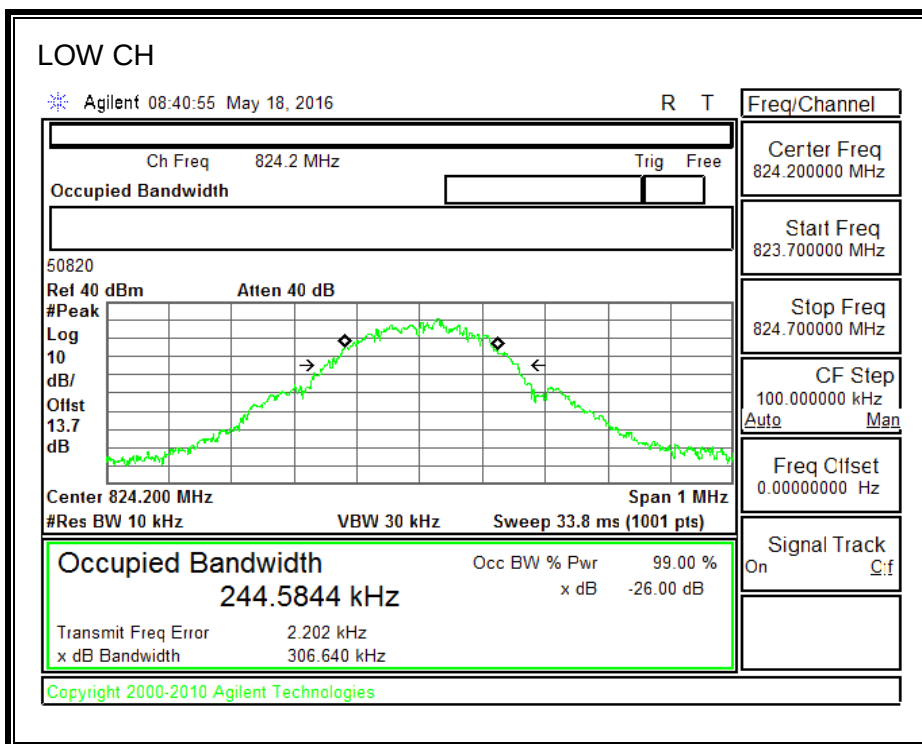

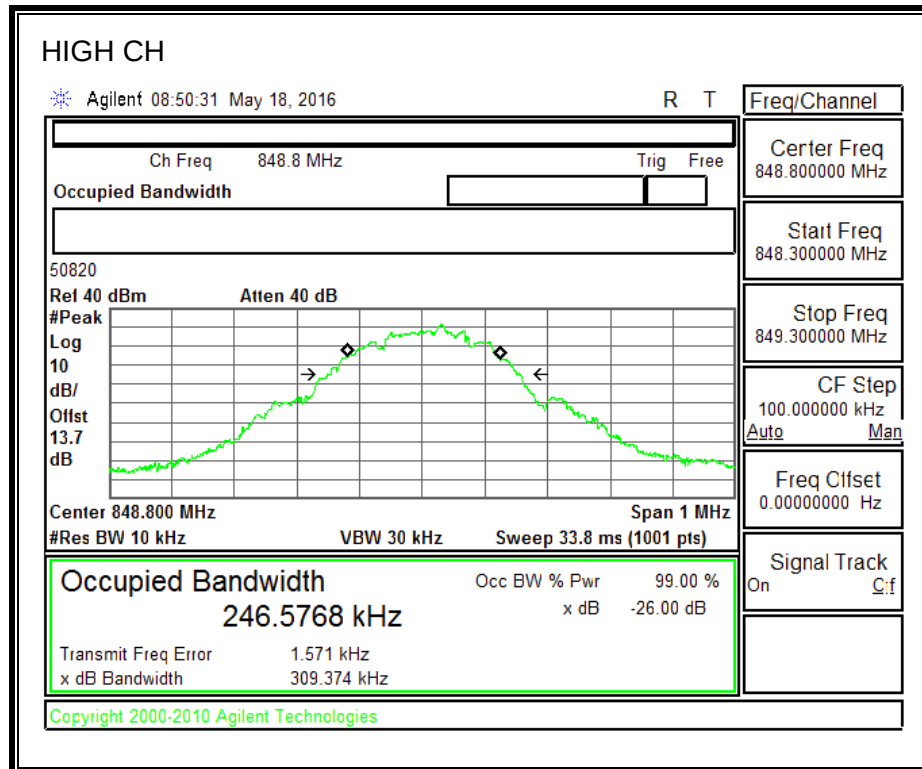



1900MHz BAND

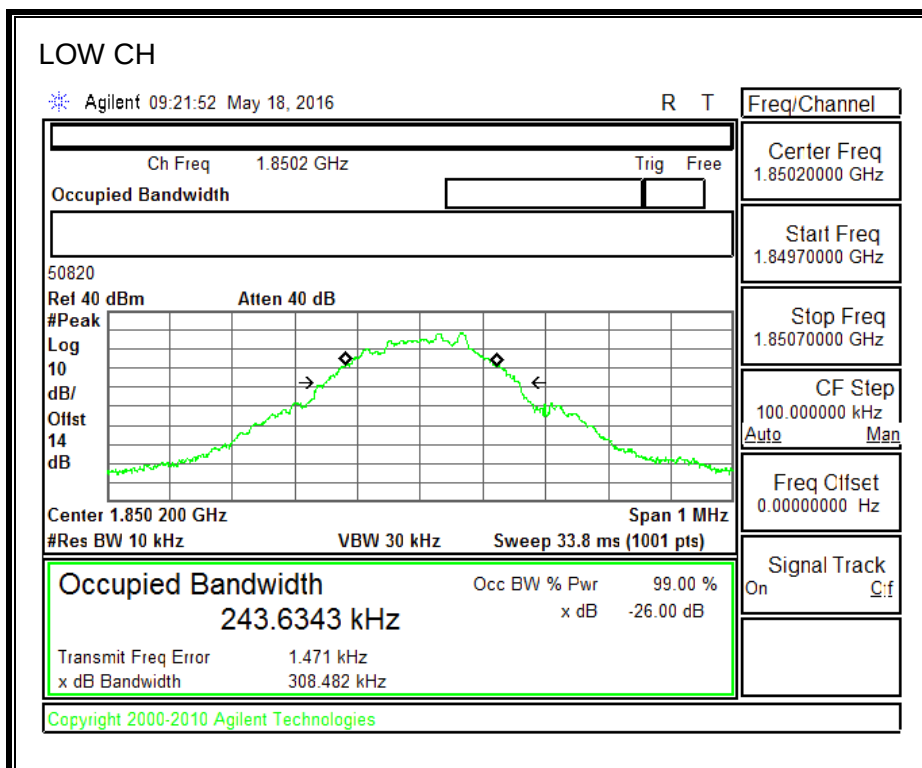


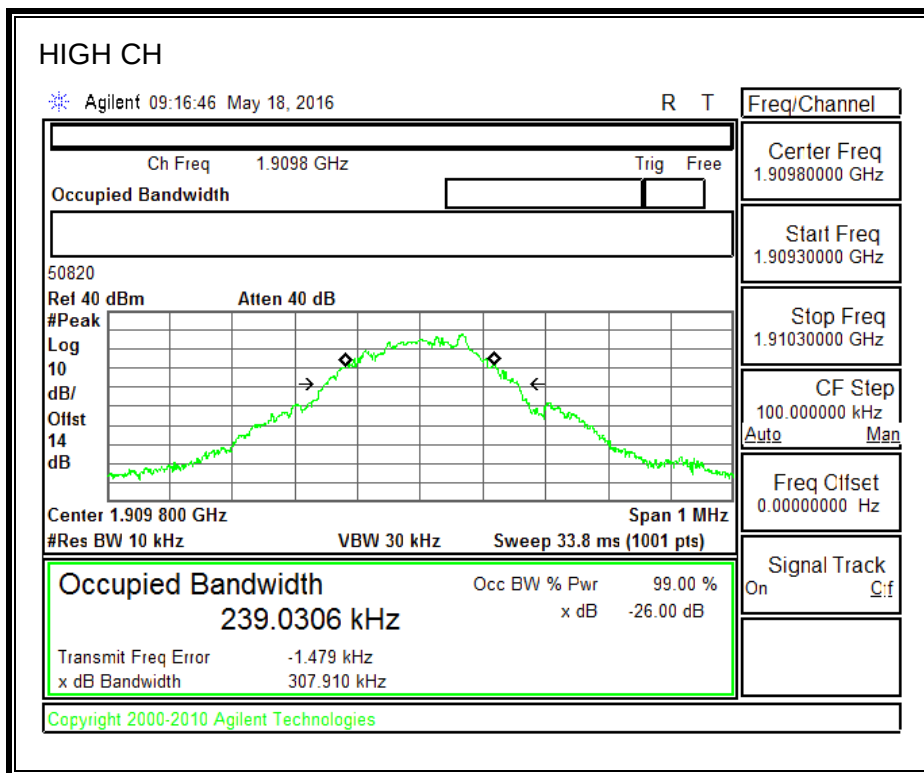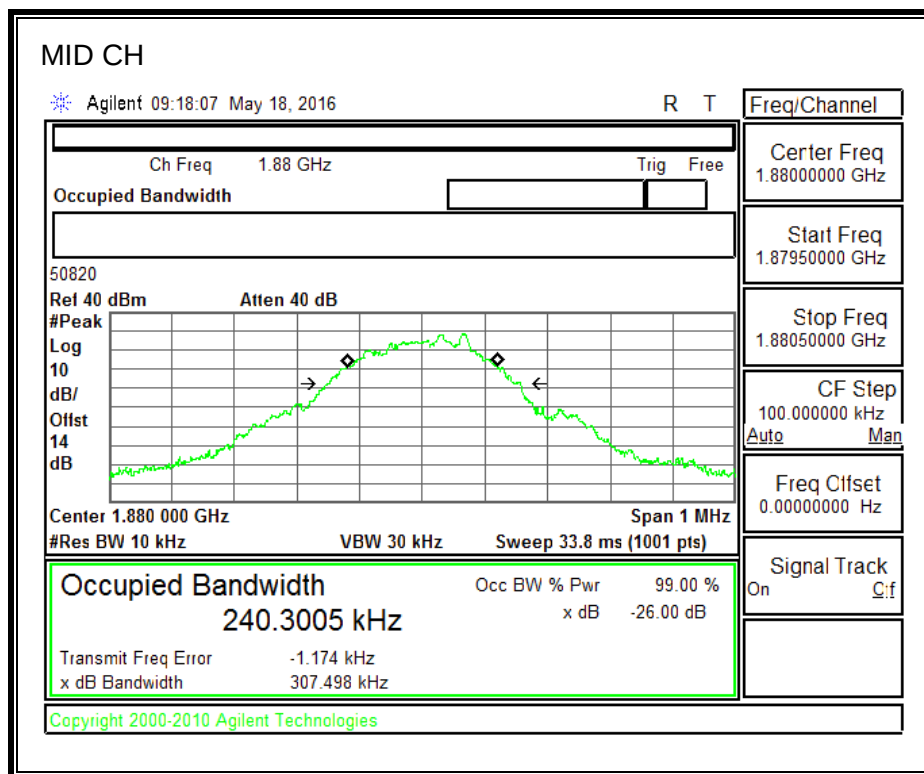


8.1.2. GSM EGPRS



850MHz BAND

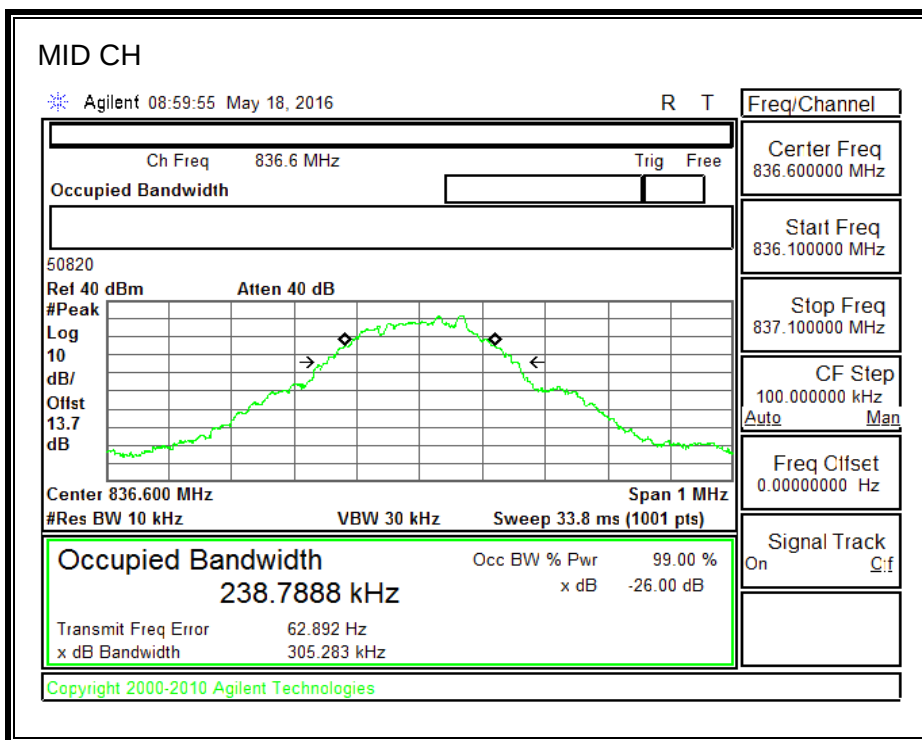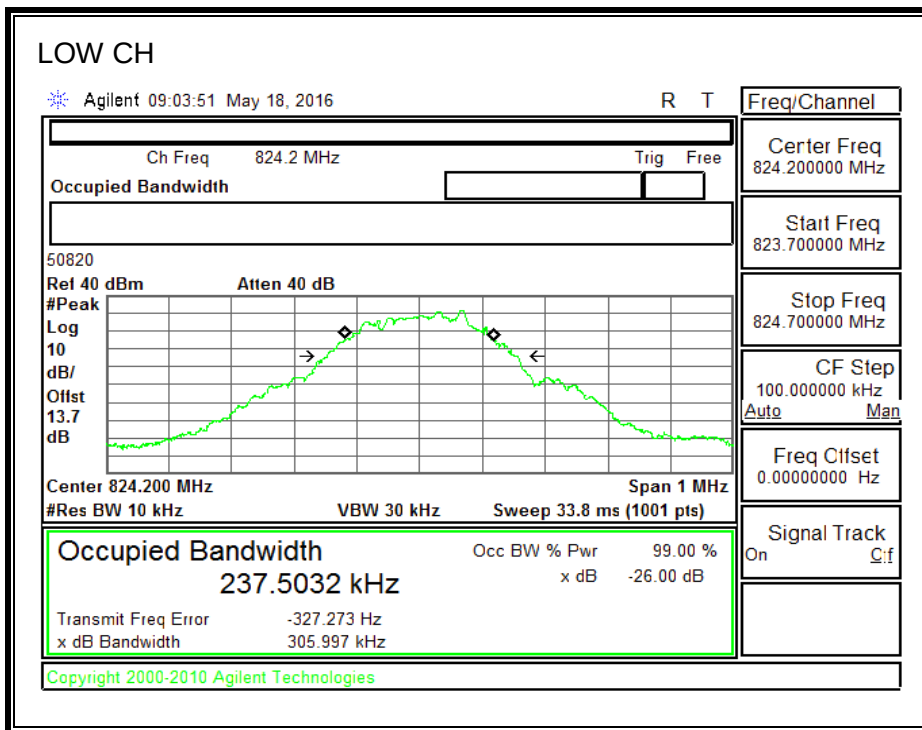

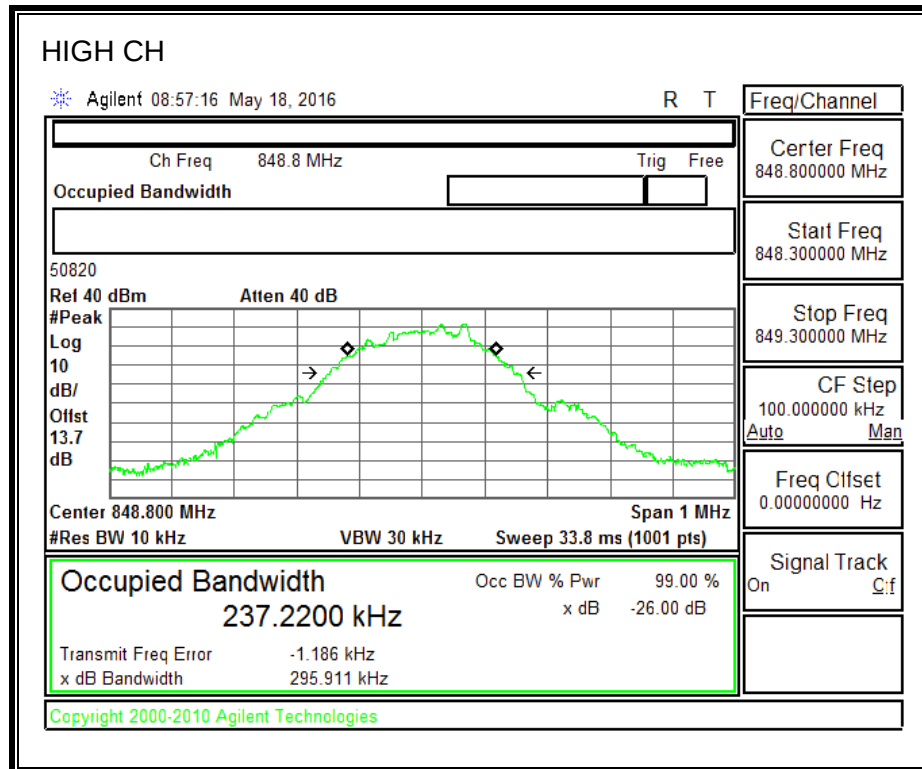



1900MHz BAND

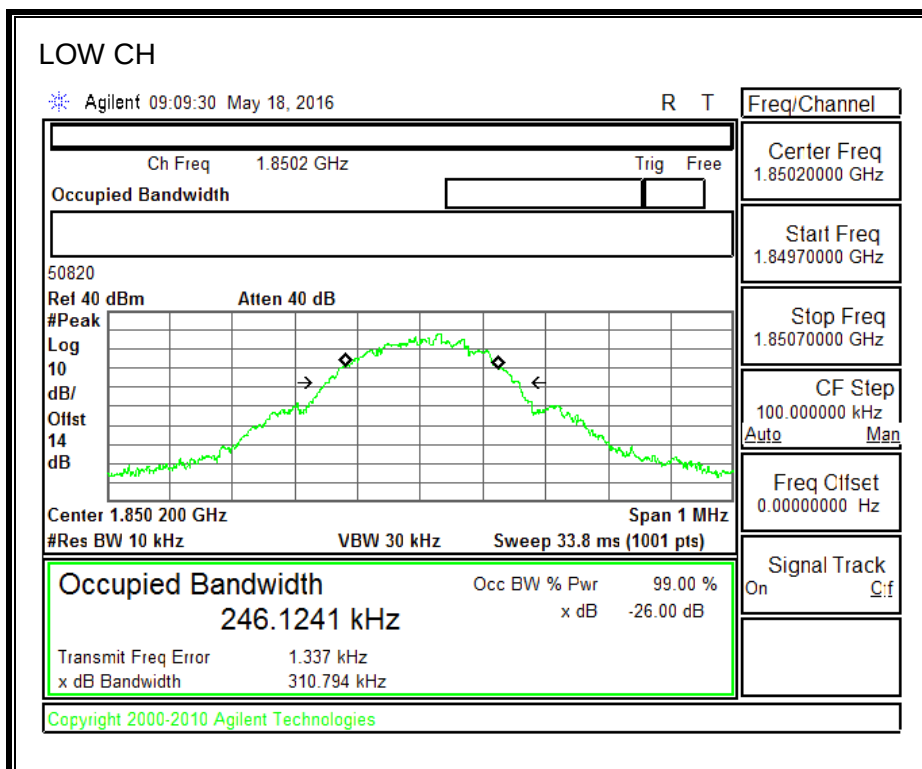


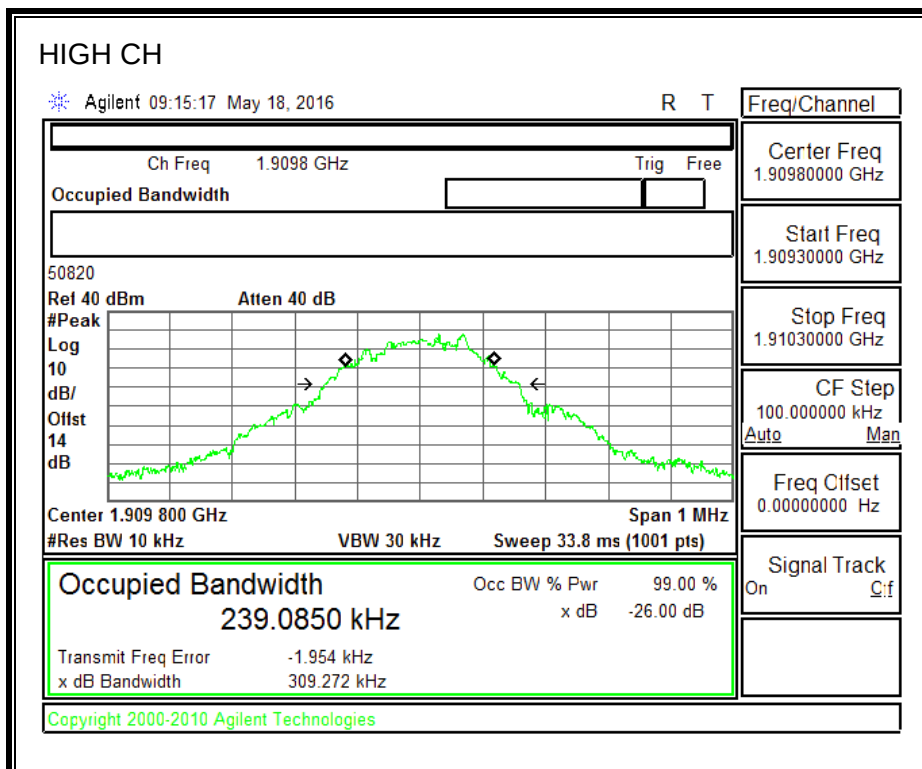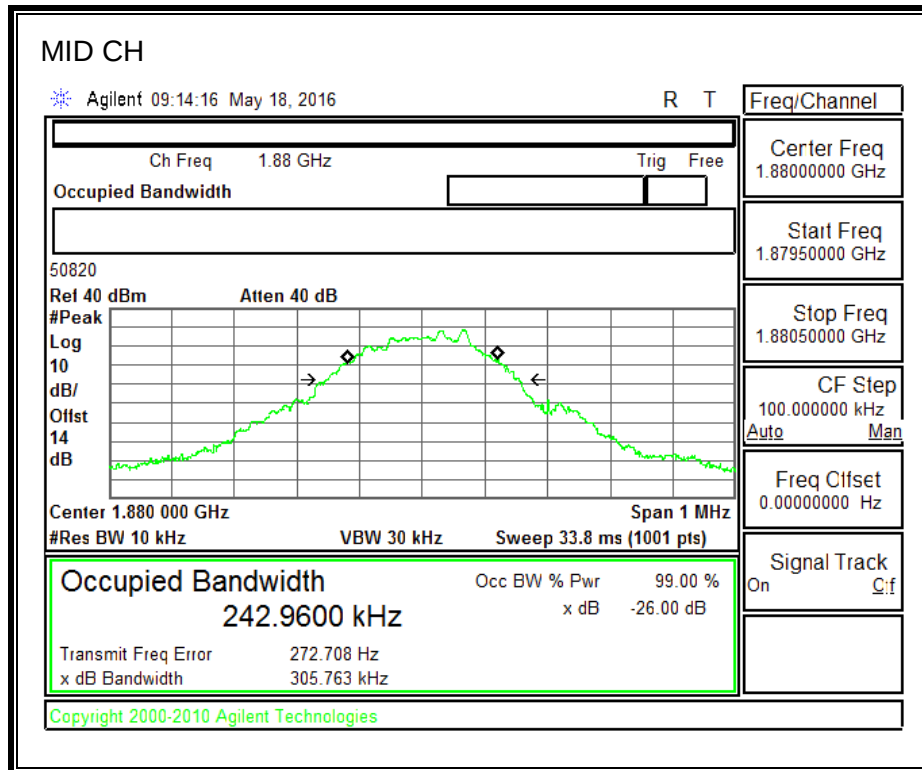



8.1.3. CDMA2000 1xRTT


850MHz BAND

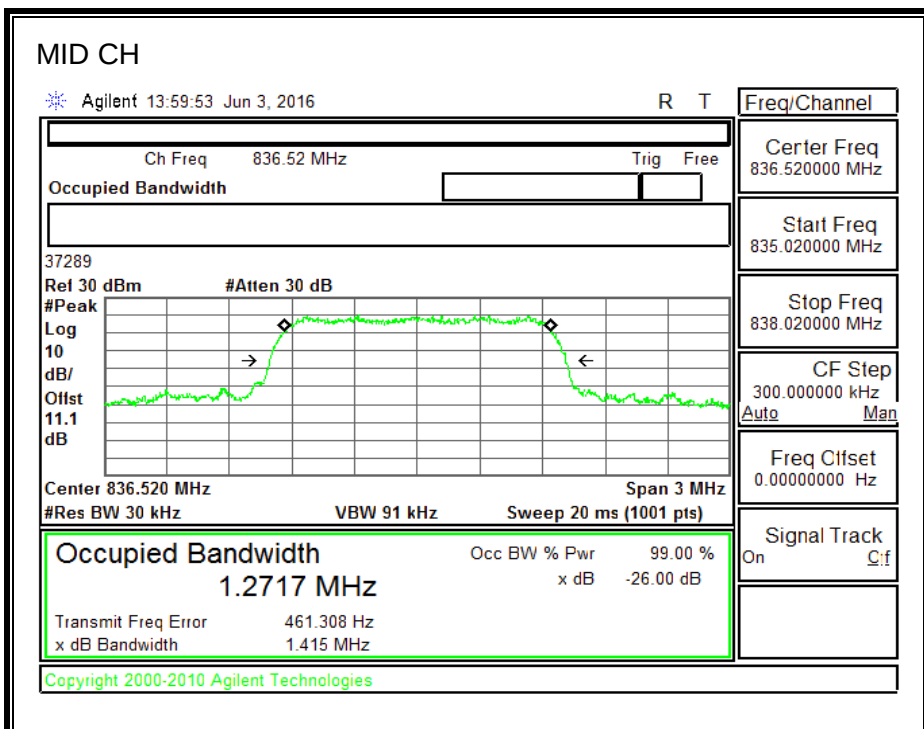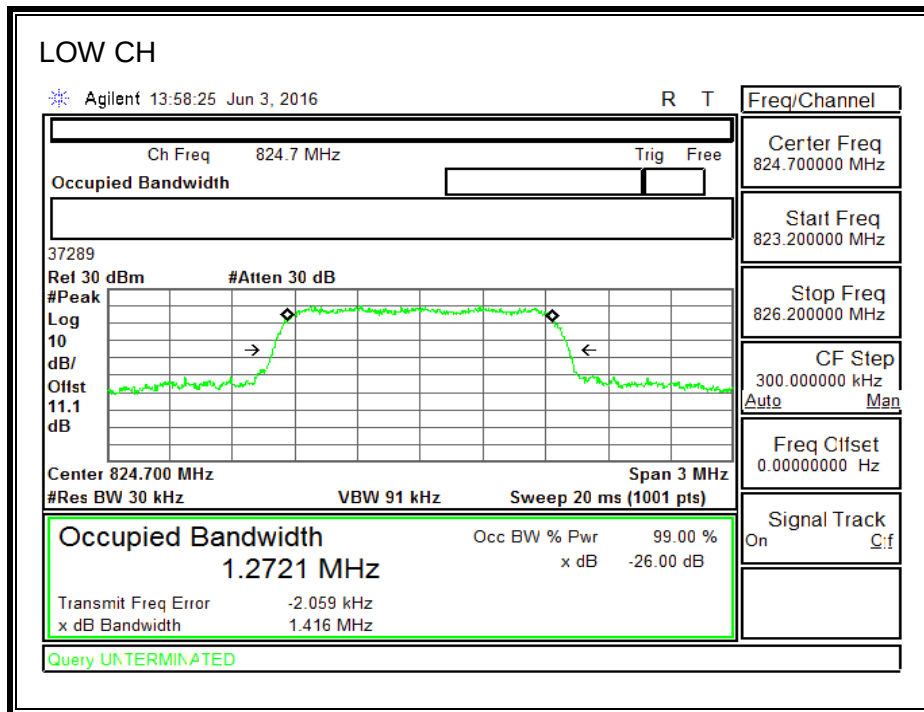


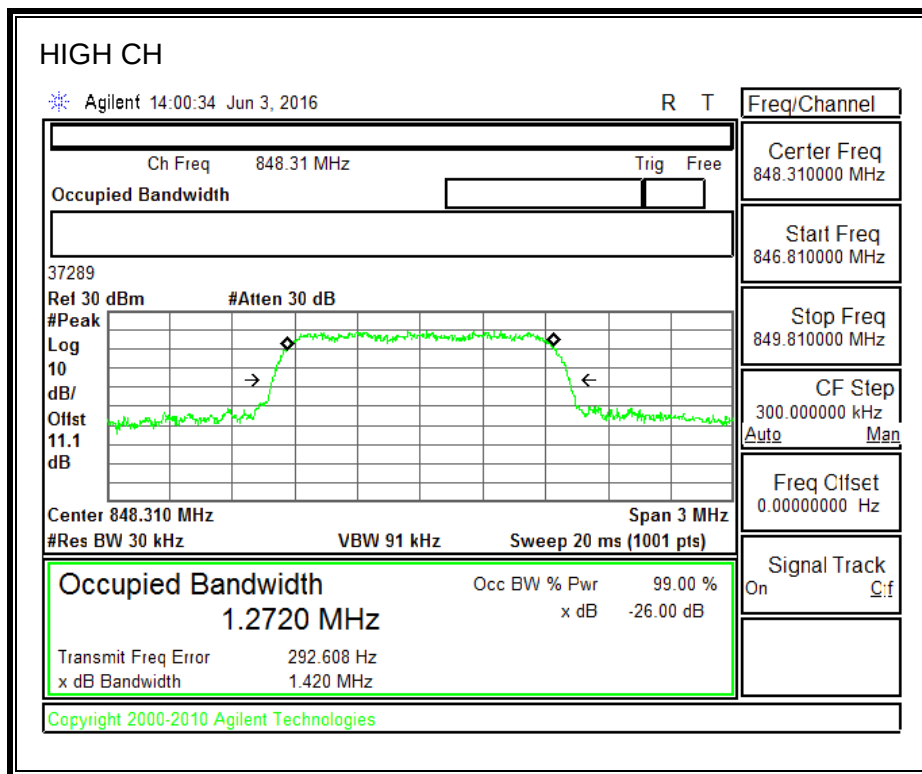



1900MHz BAND

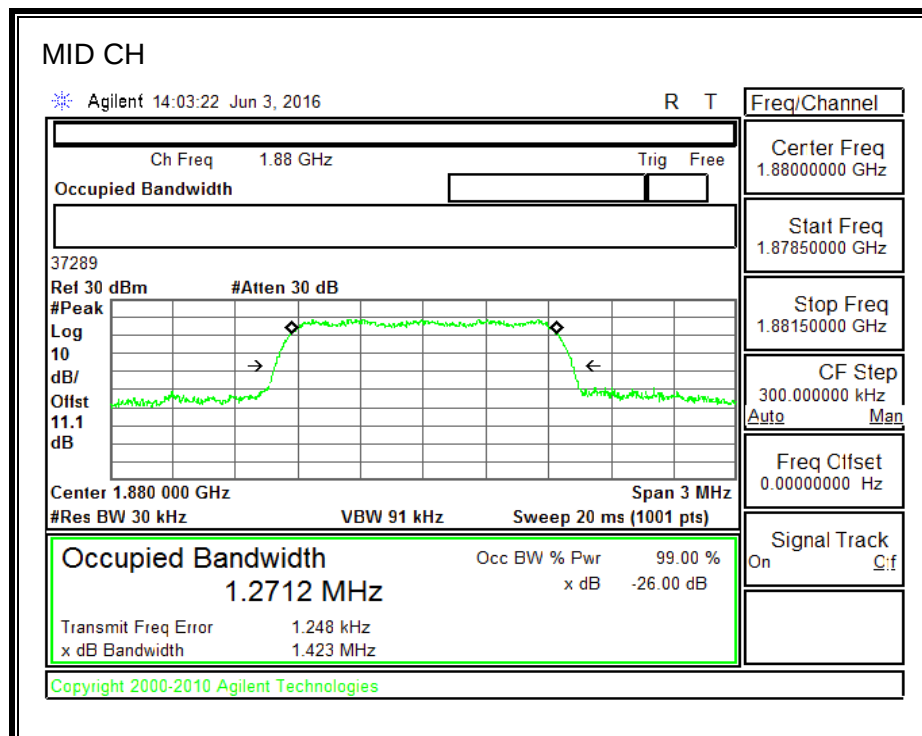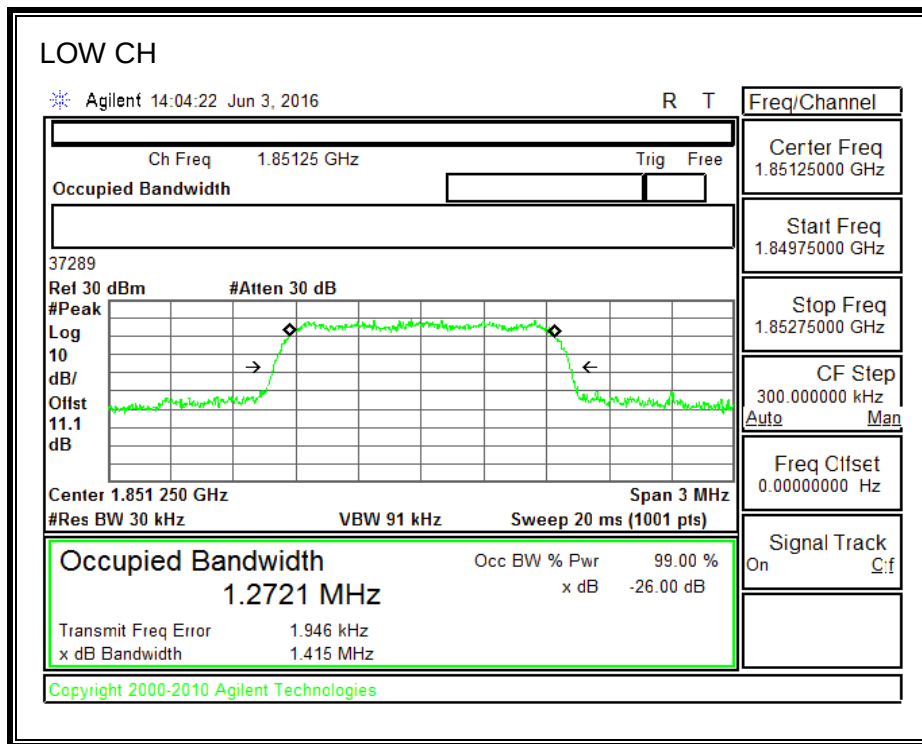

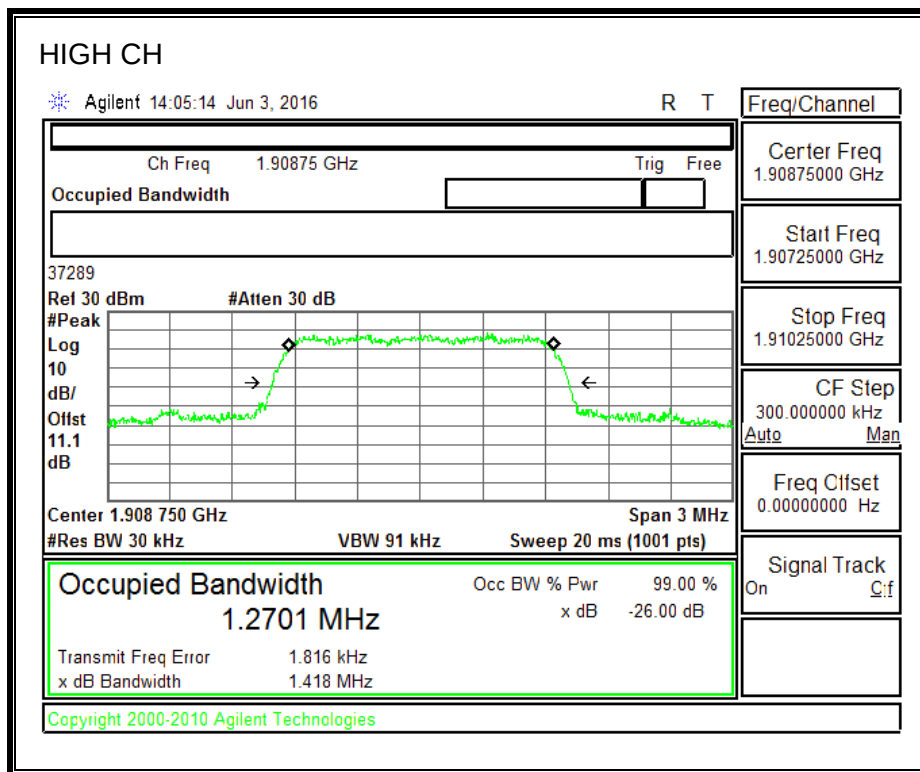



800MHz SECONDARY BAND

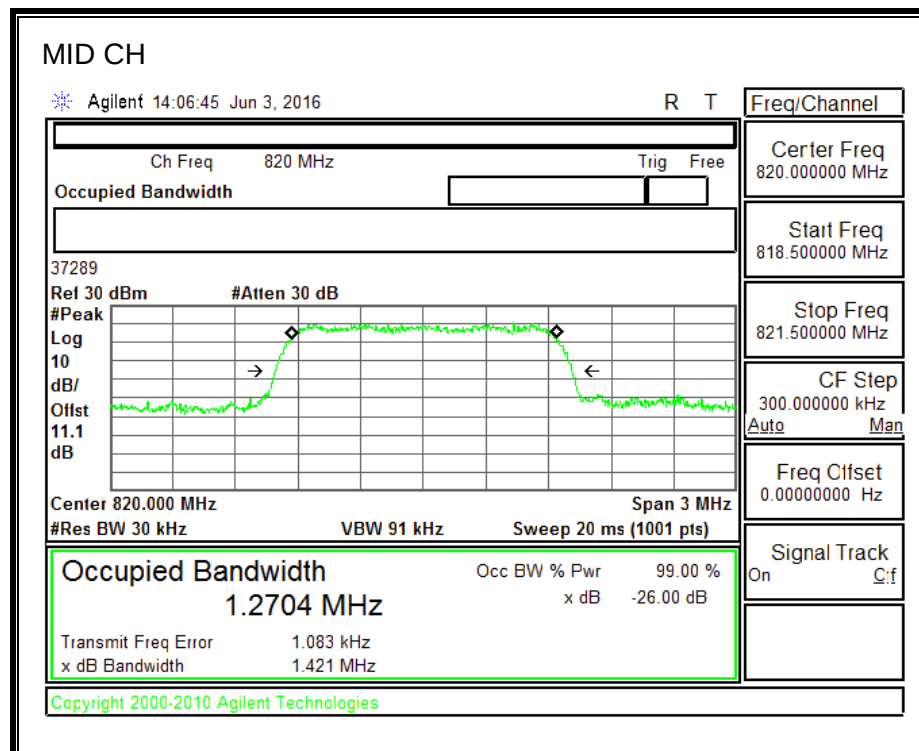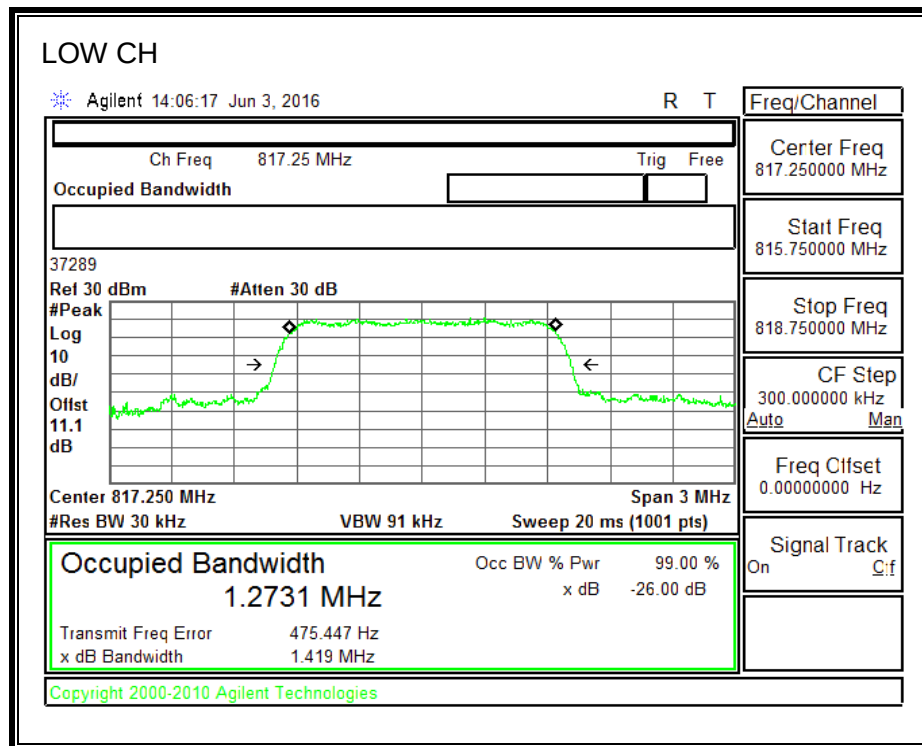


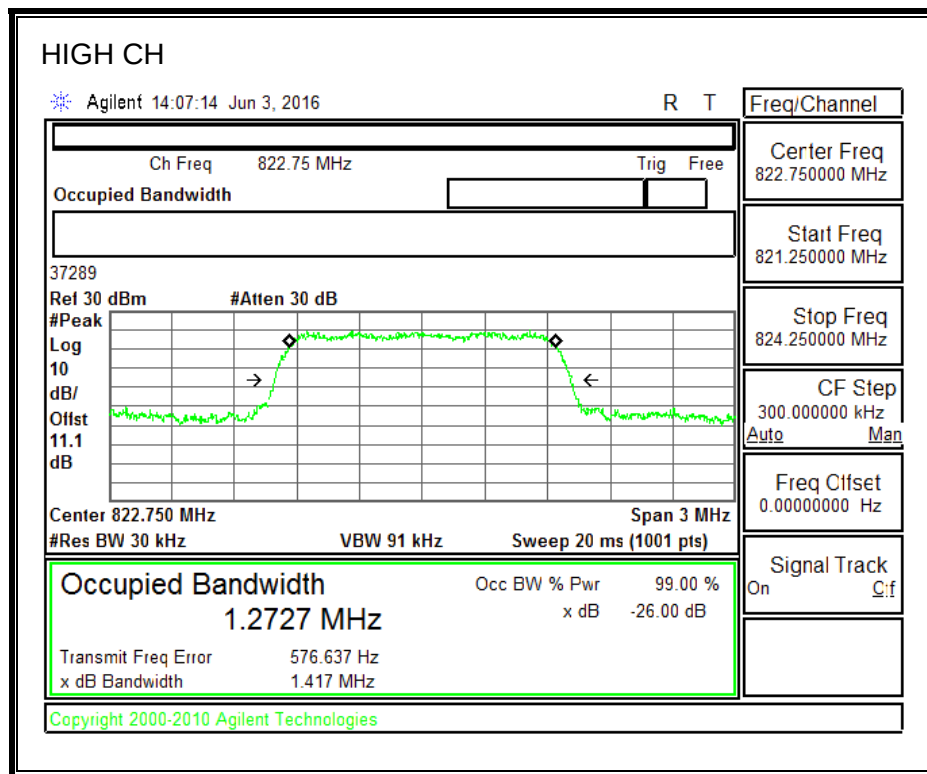



8.1.4. CDMA2000 EVDO Rev. A


850MHz BAND

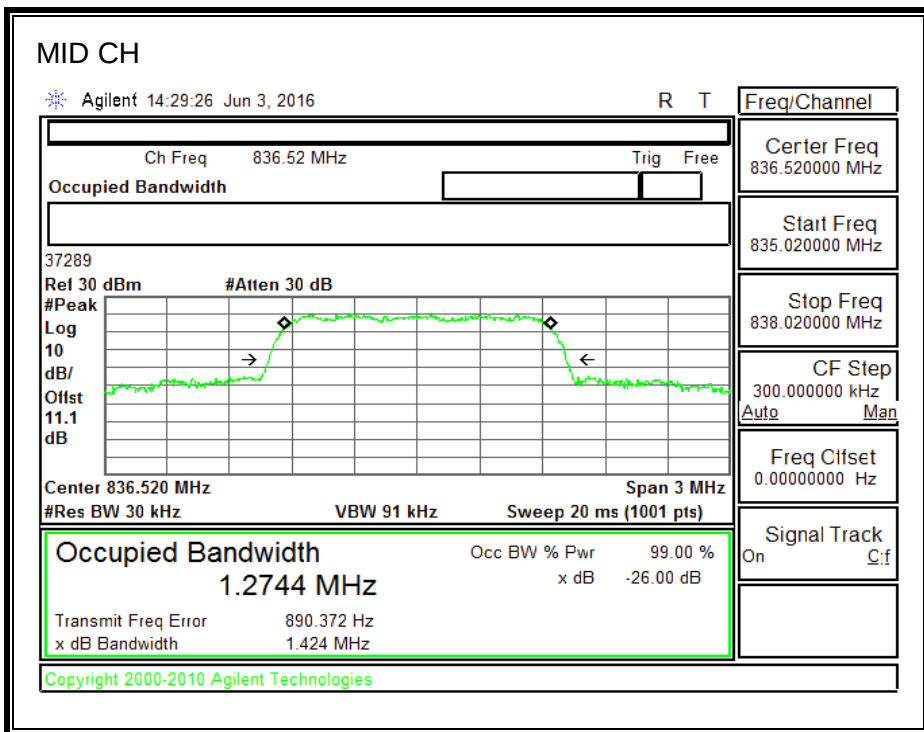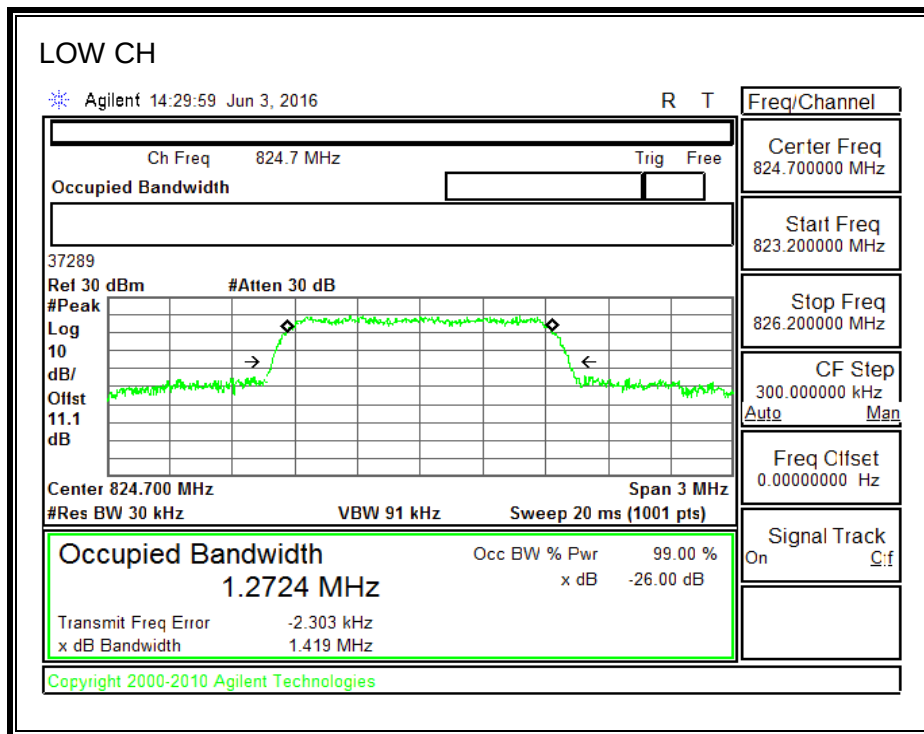


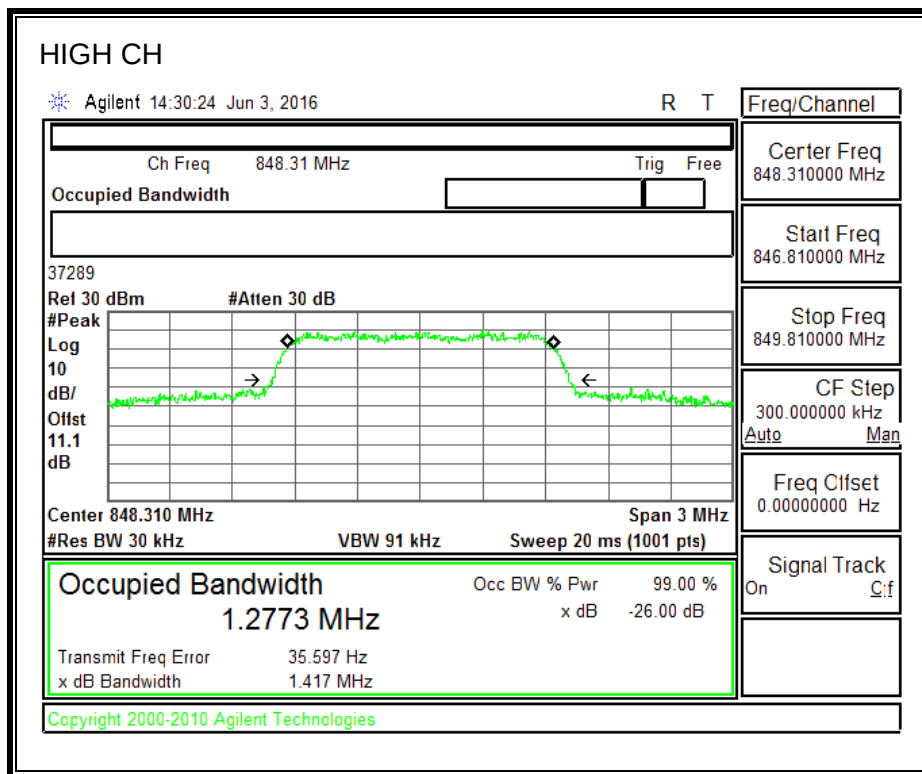



1900MHz BAND

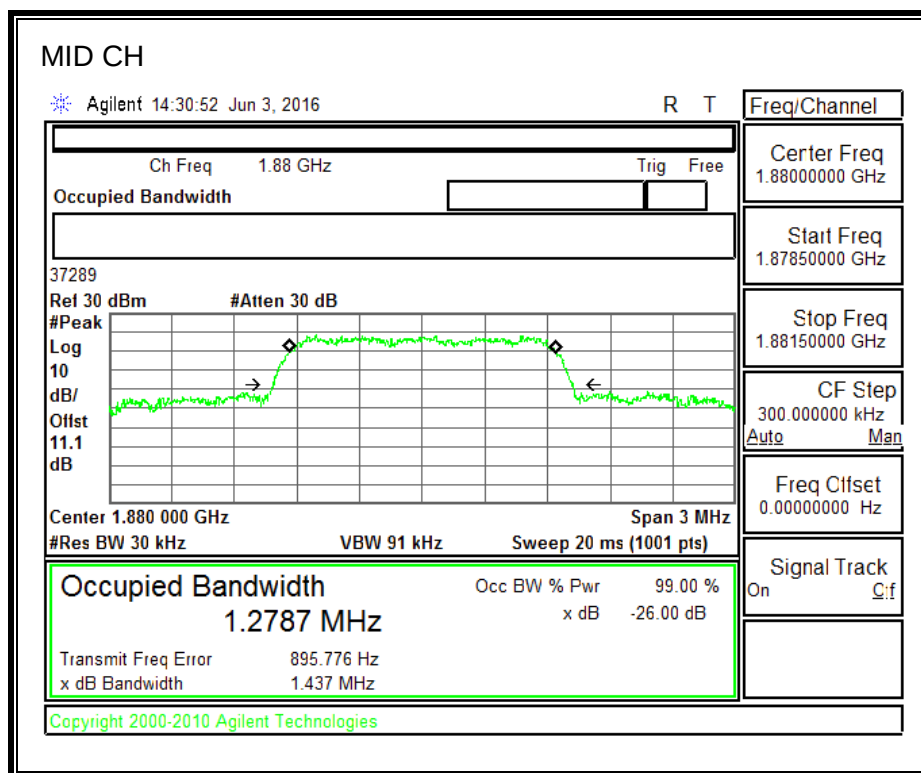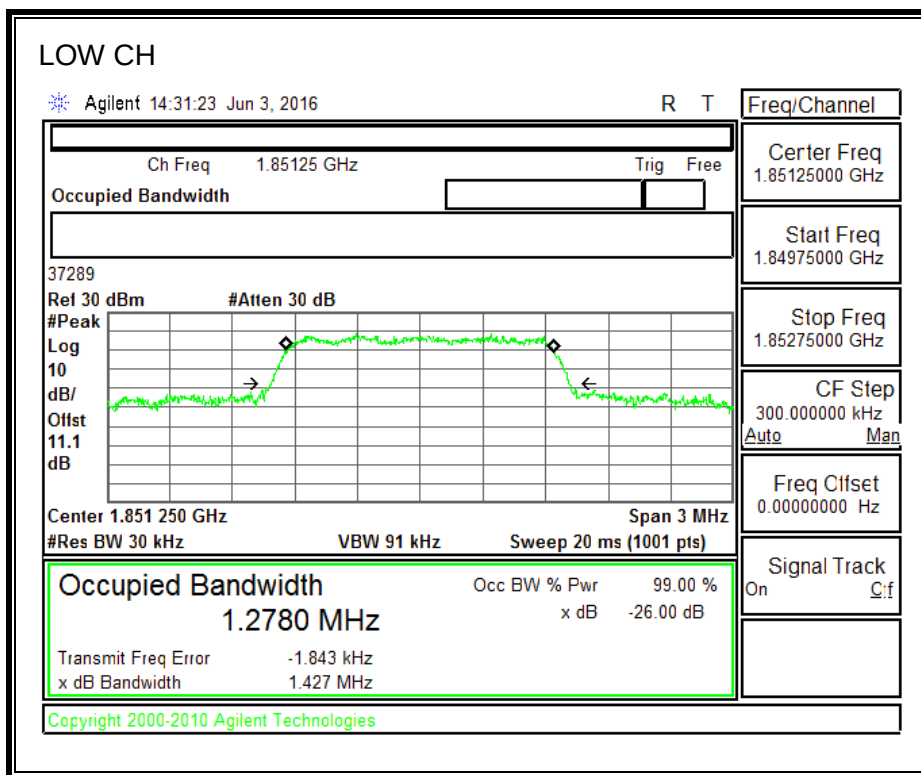

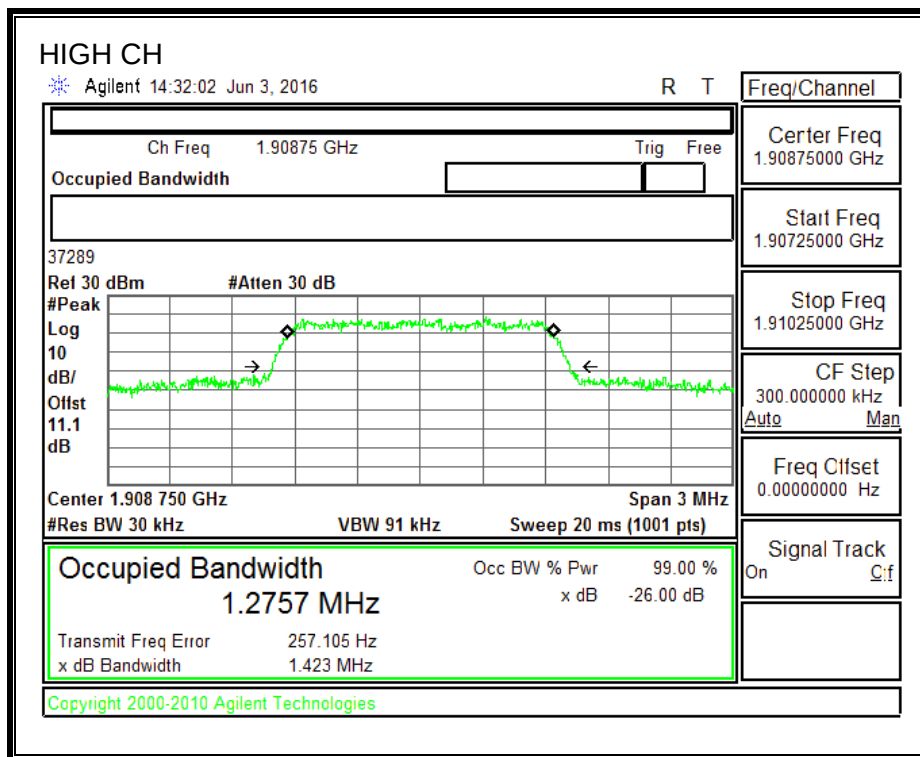



800MHz SECONDARY BAND

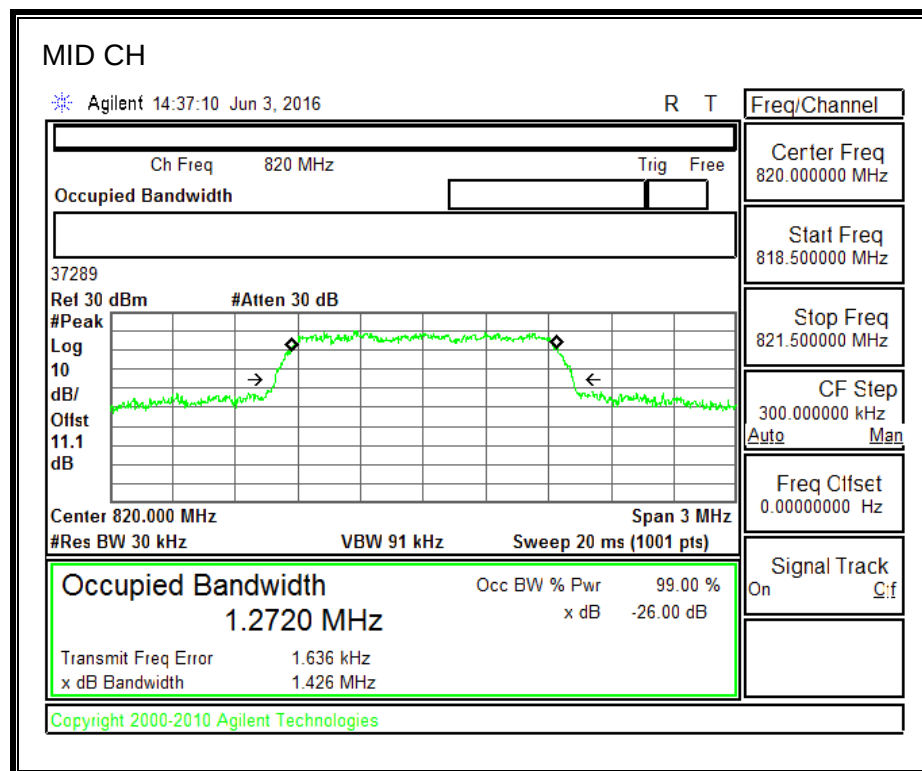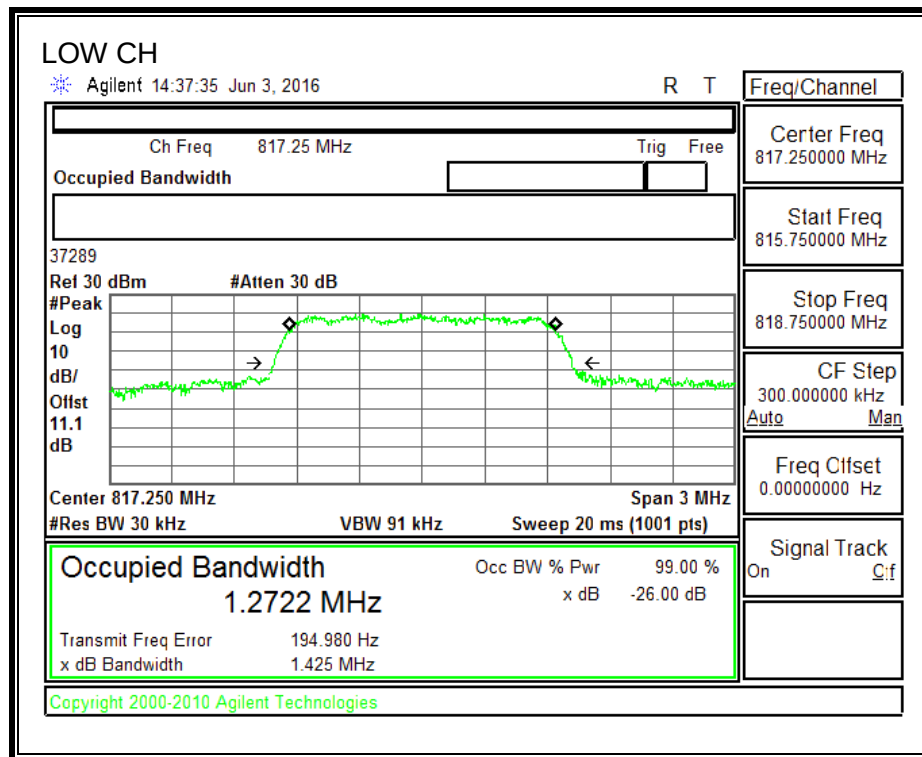


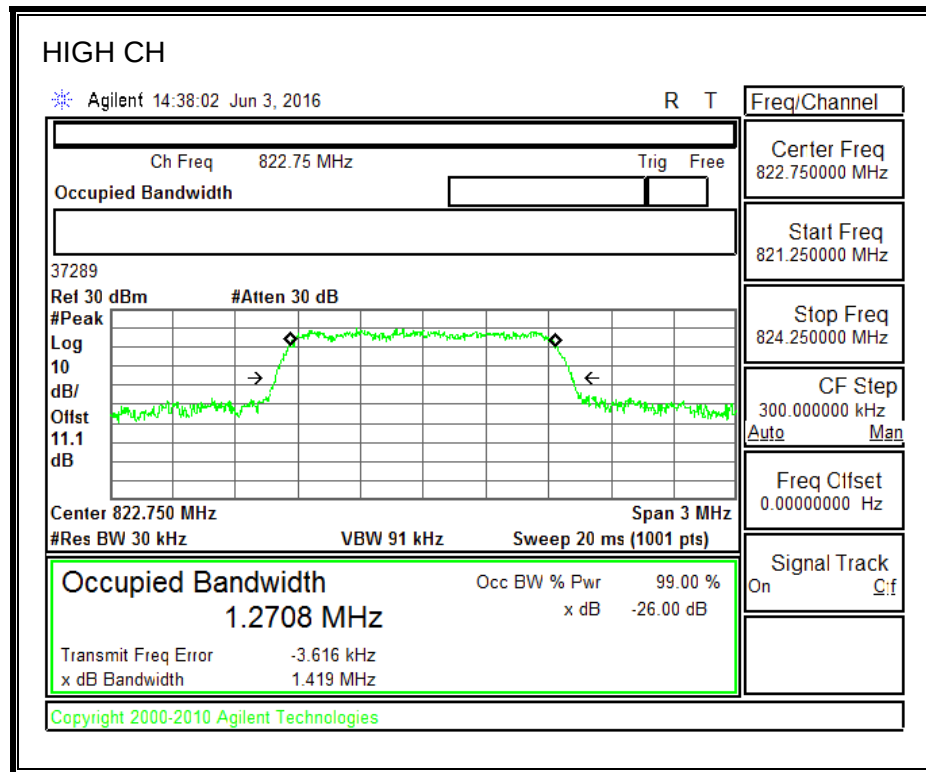



8.1.5. UMTS REL 99


850MHz BAND

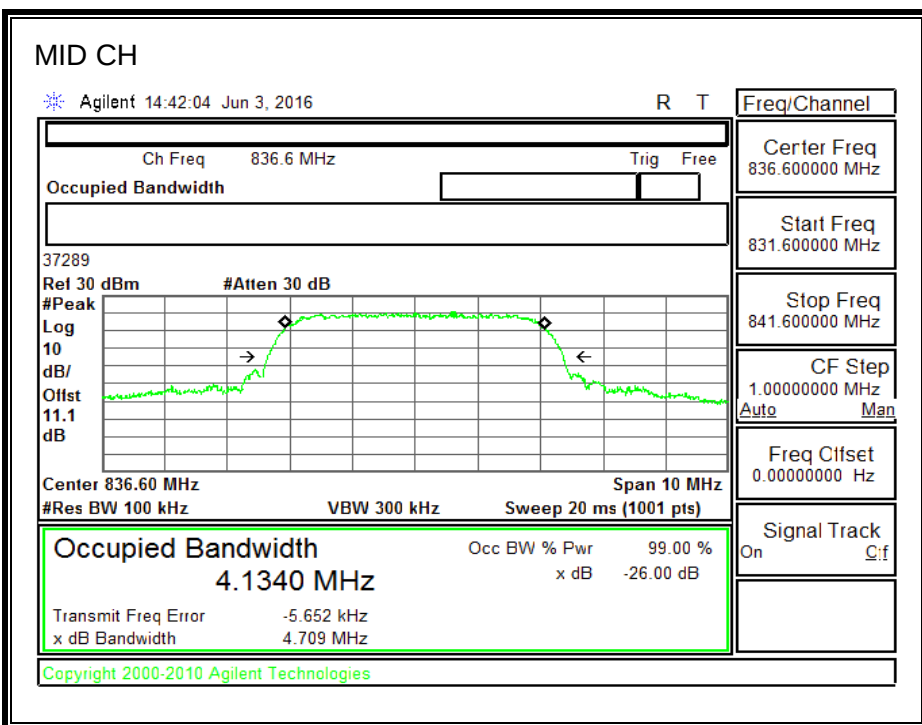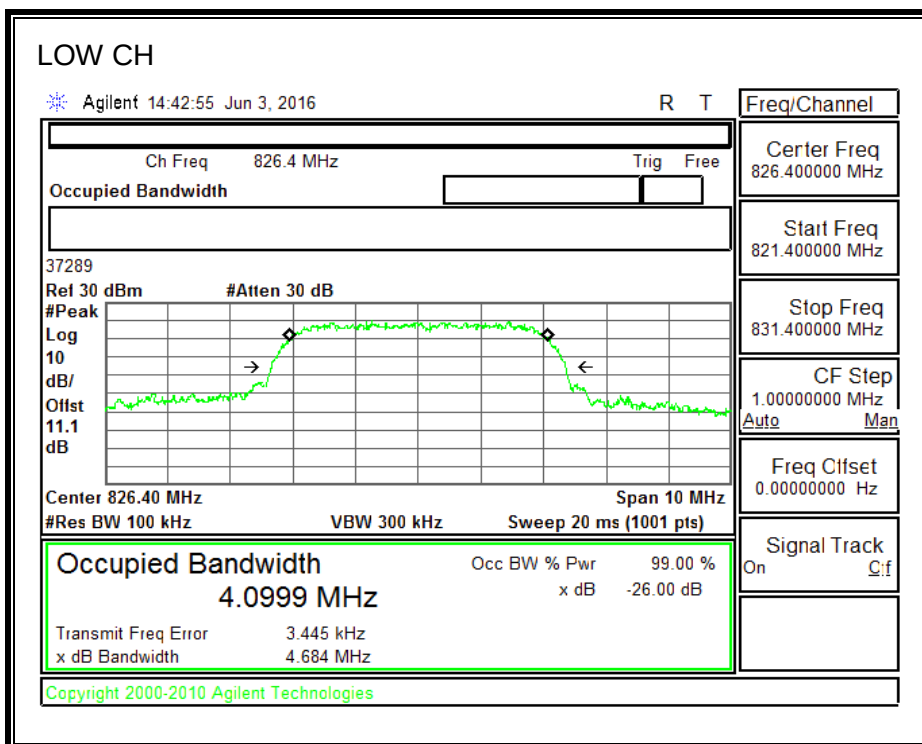


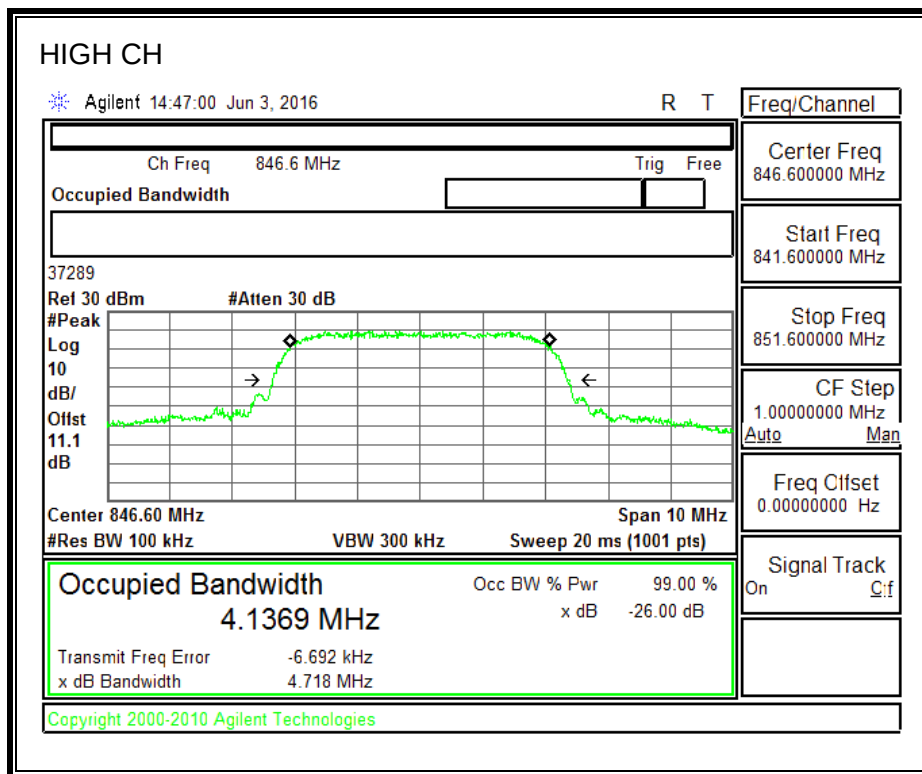



1900MHz BAND

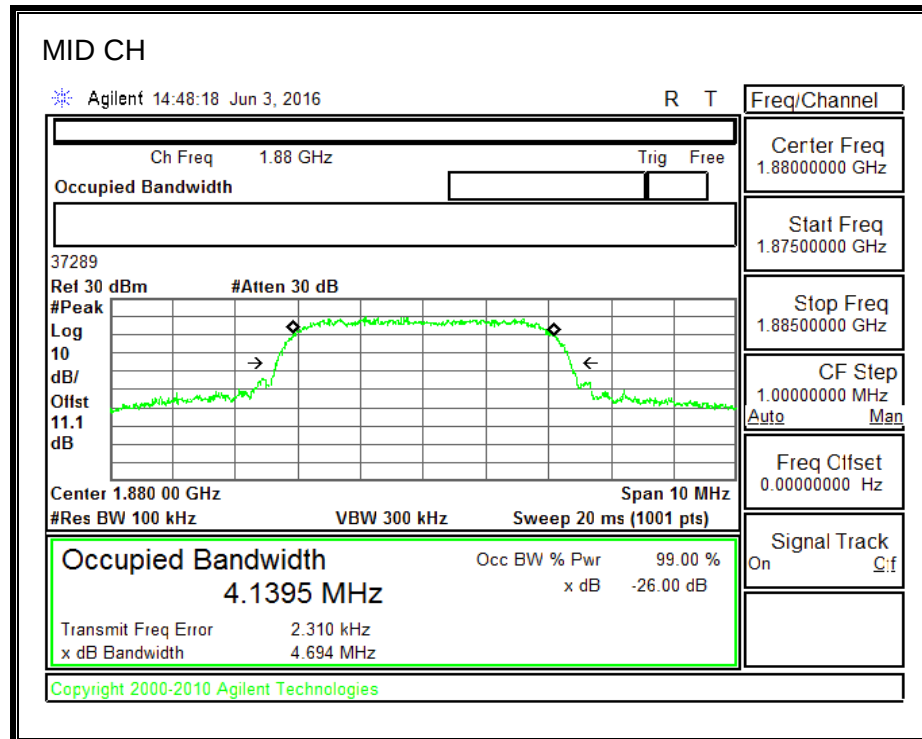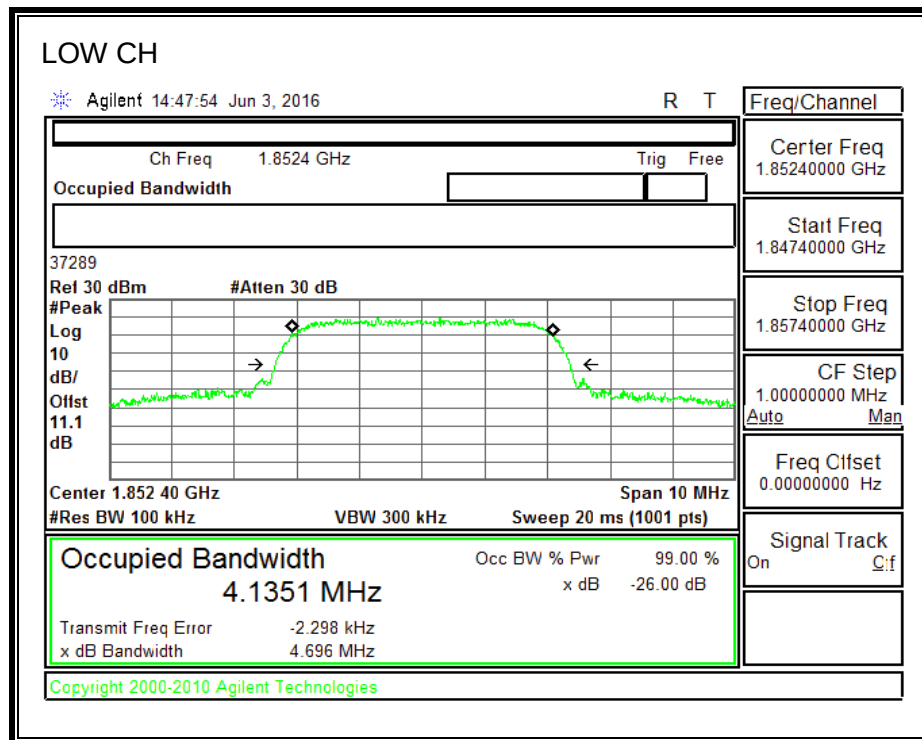

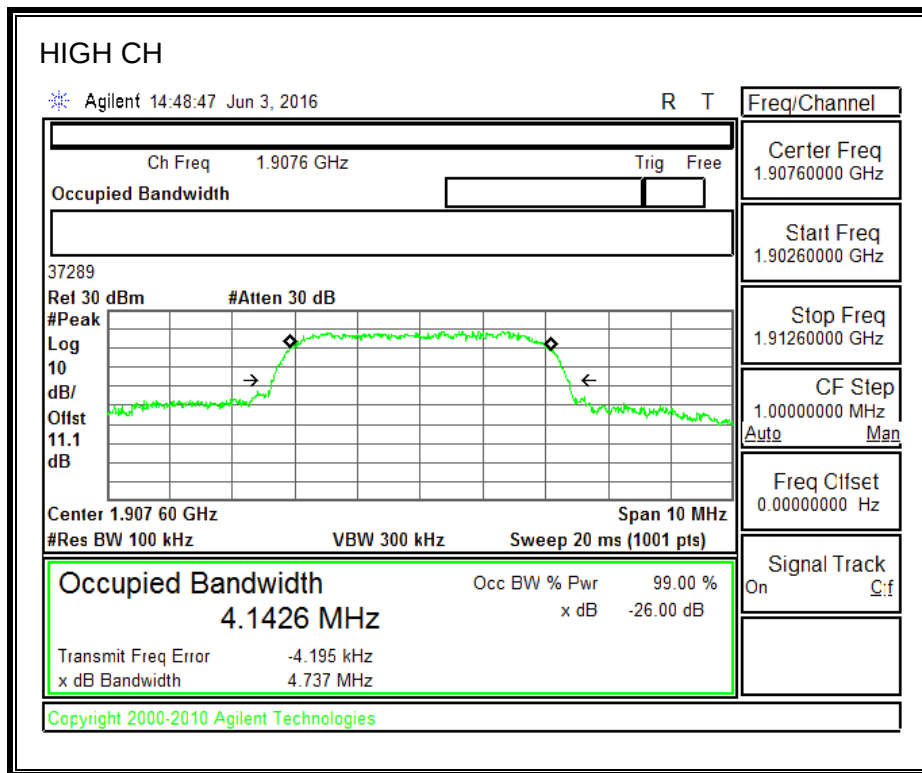



1700MHz BAND

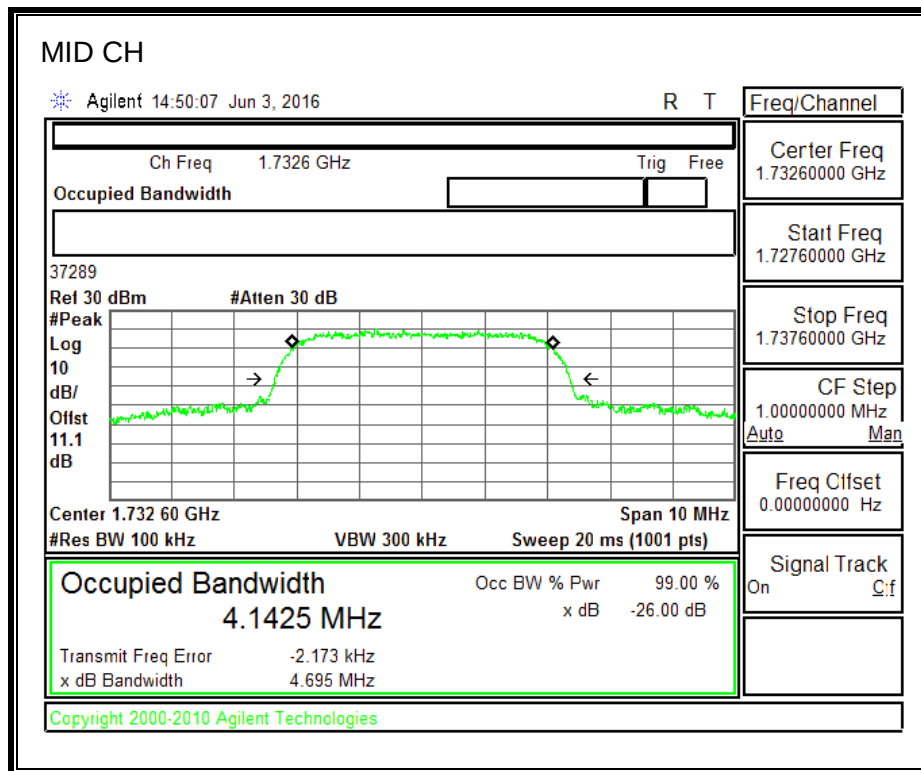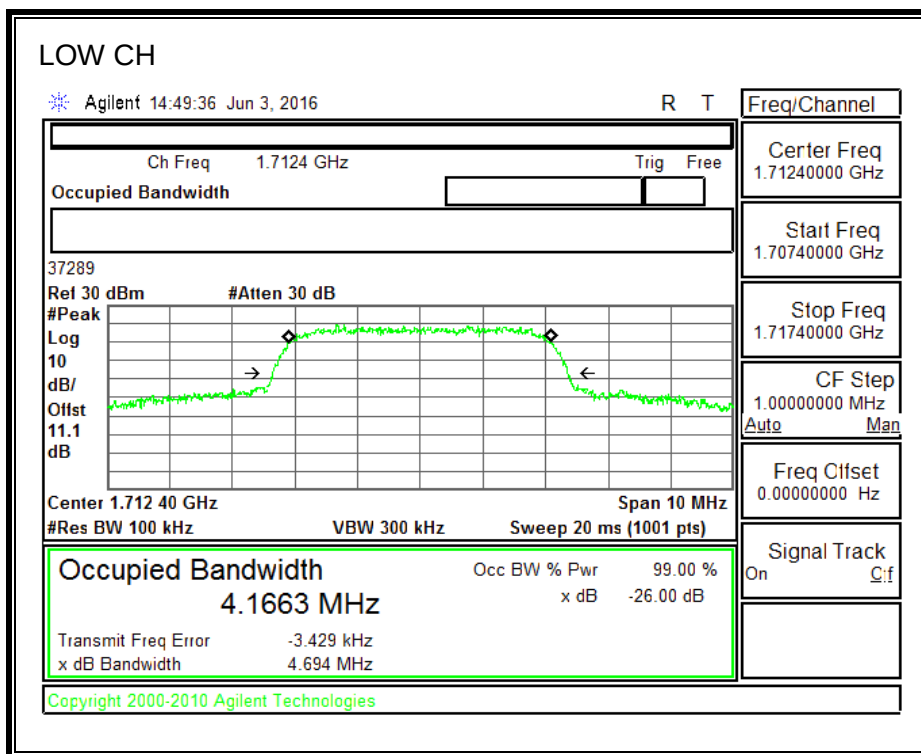


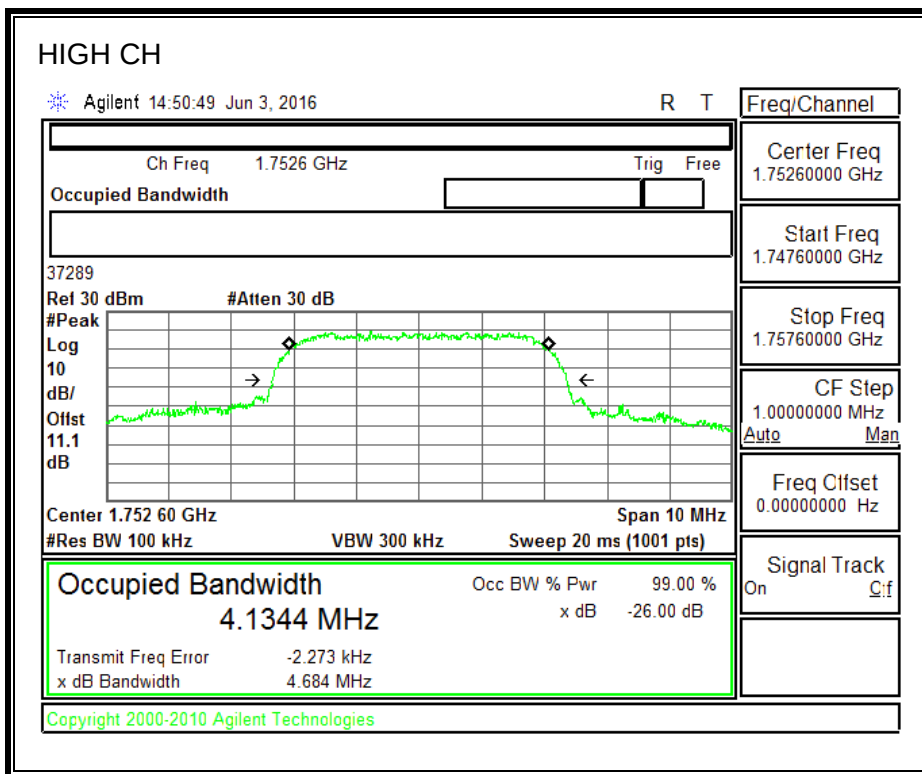



8.1.6. UMTS HSDPA


850MHz BAND

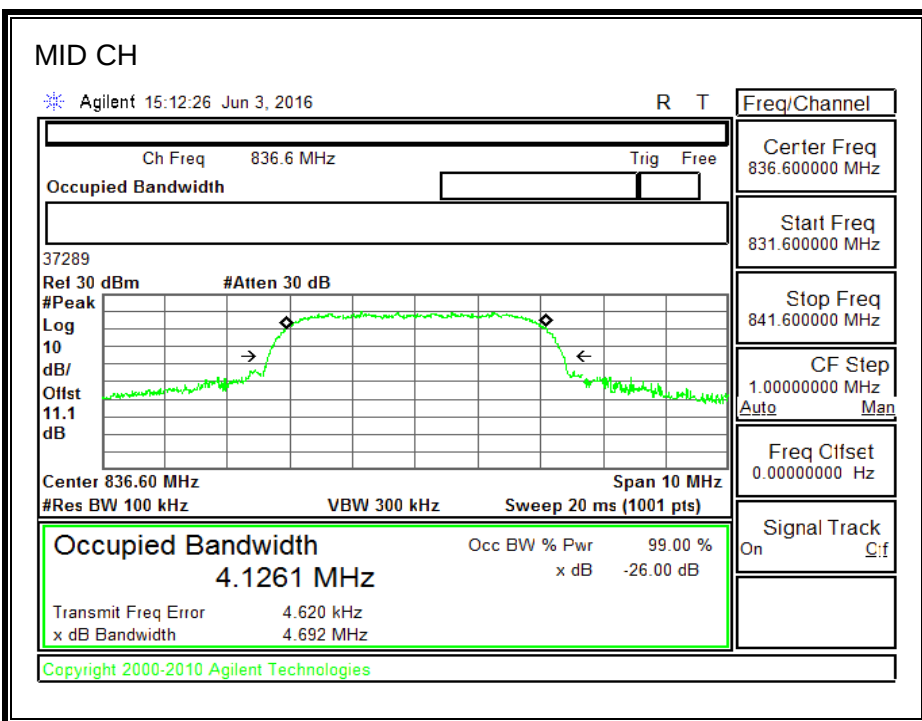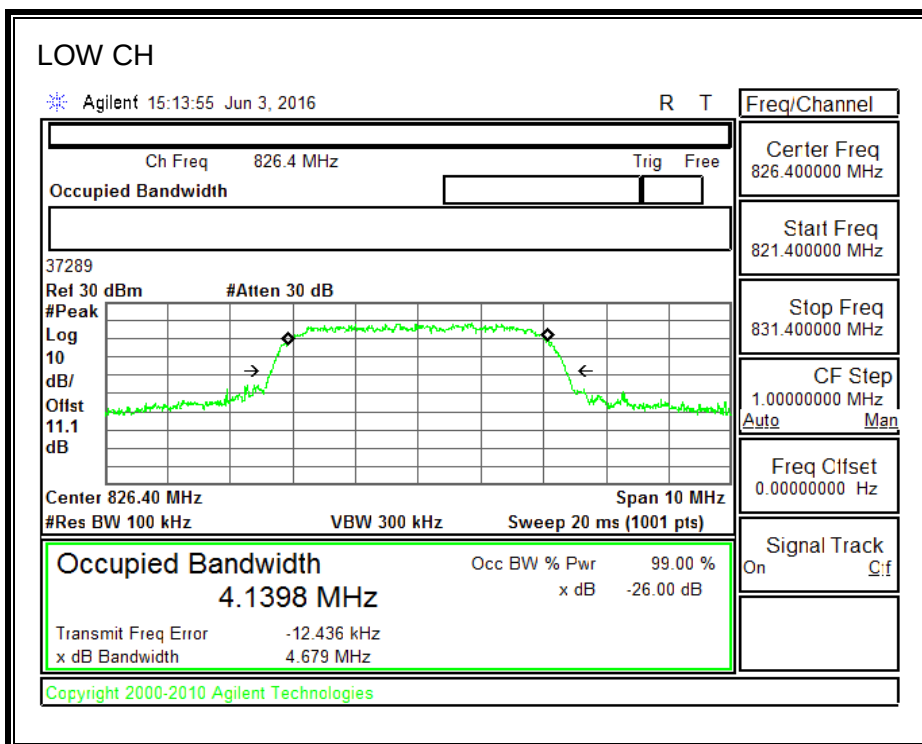


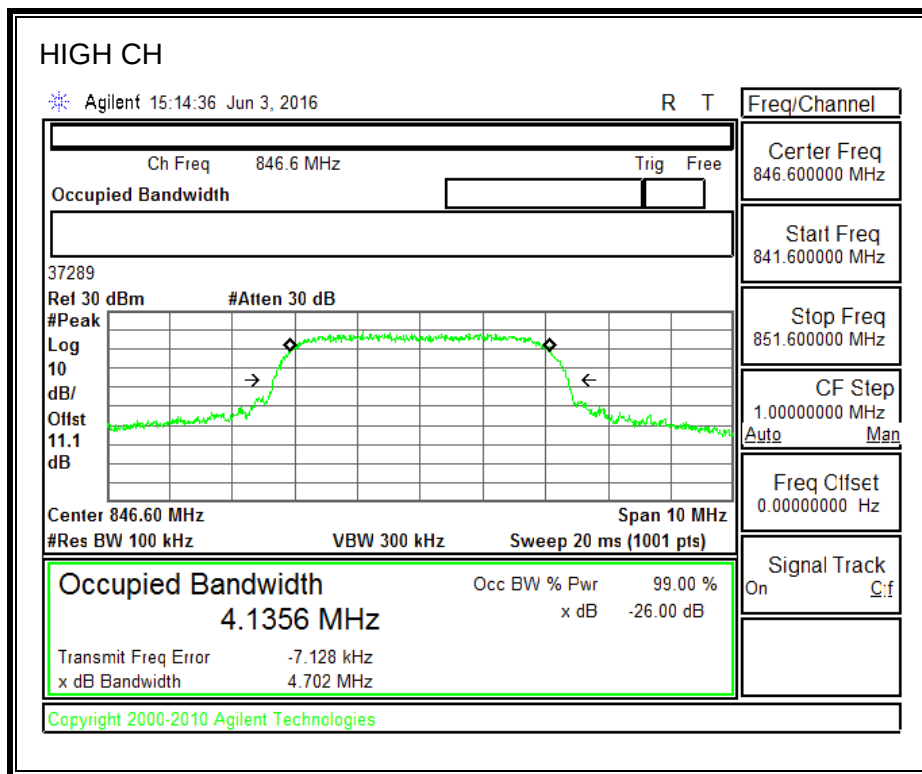



1900MHz BAND

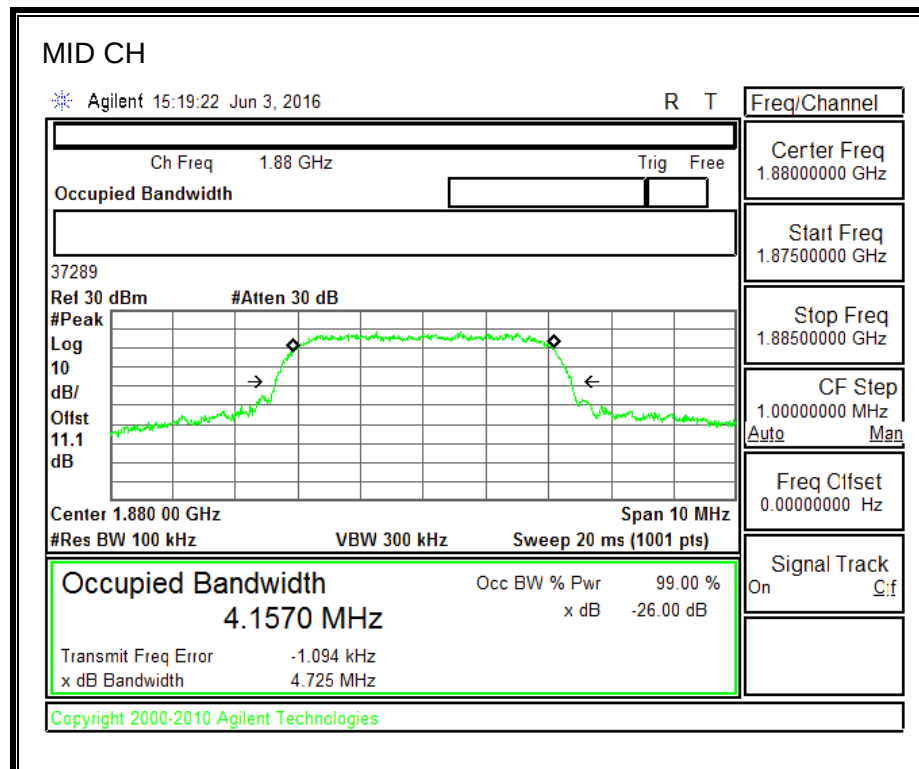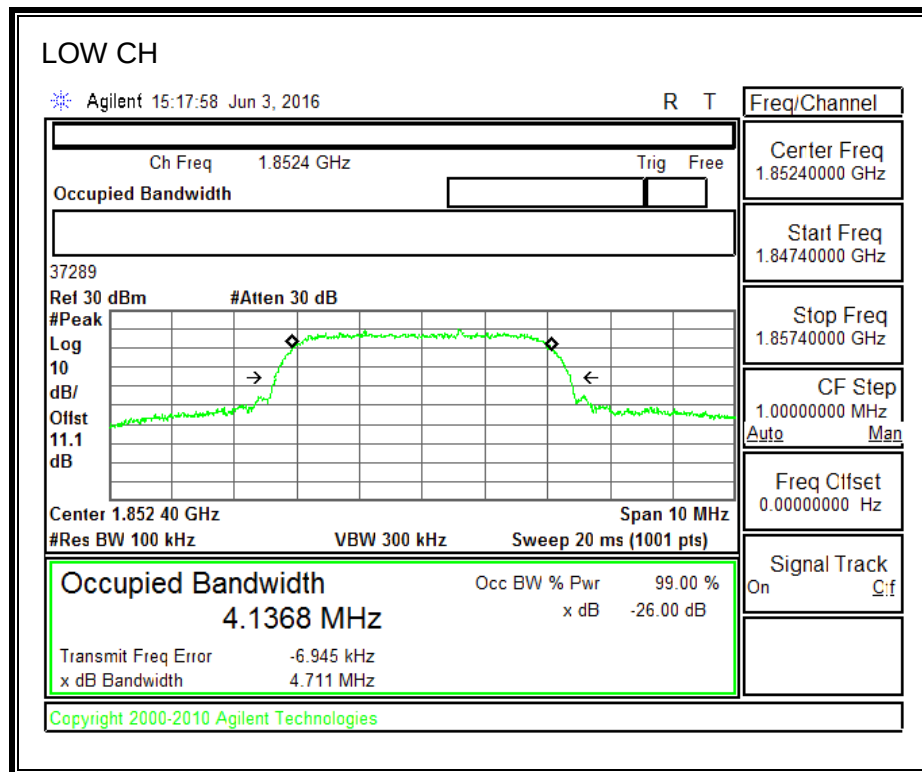

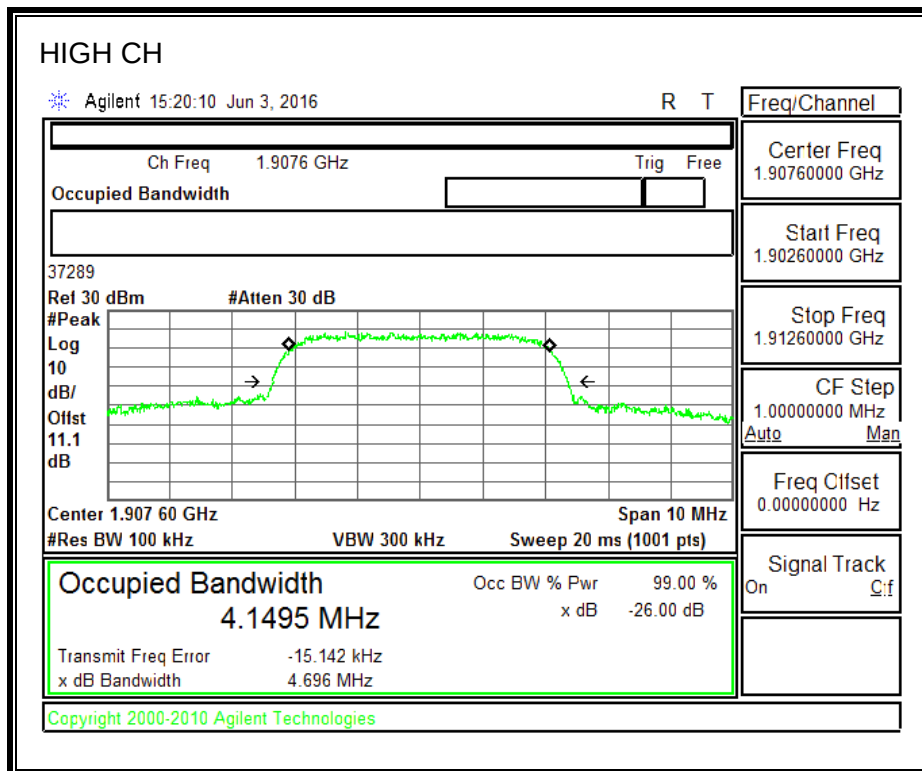

1700MHz BAND

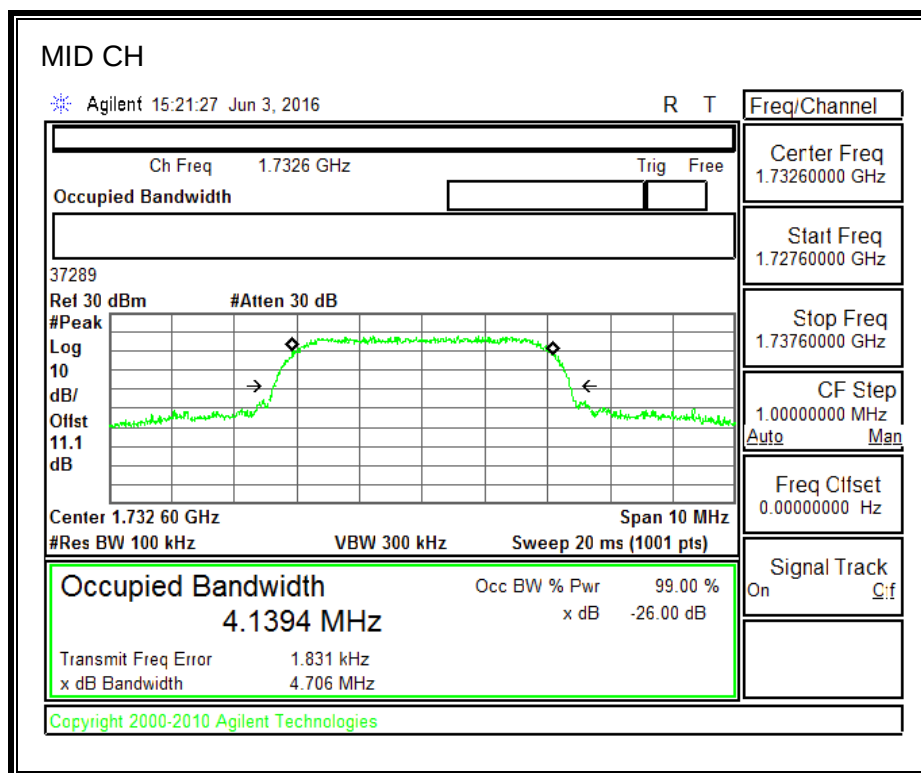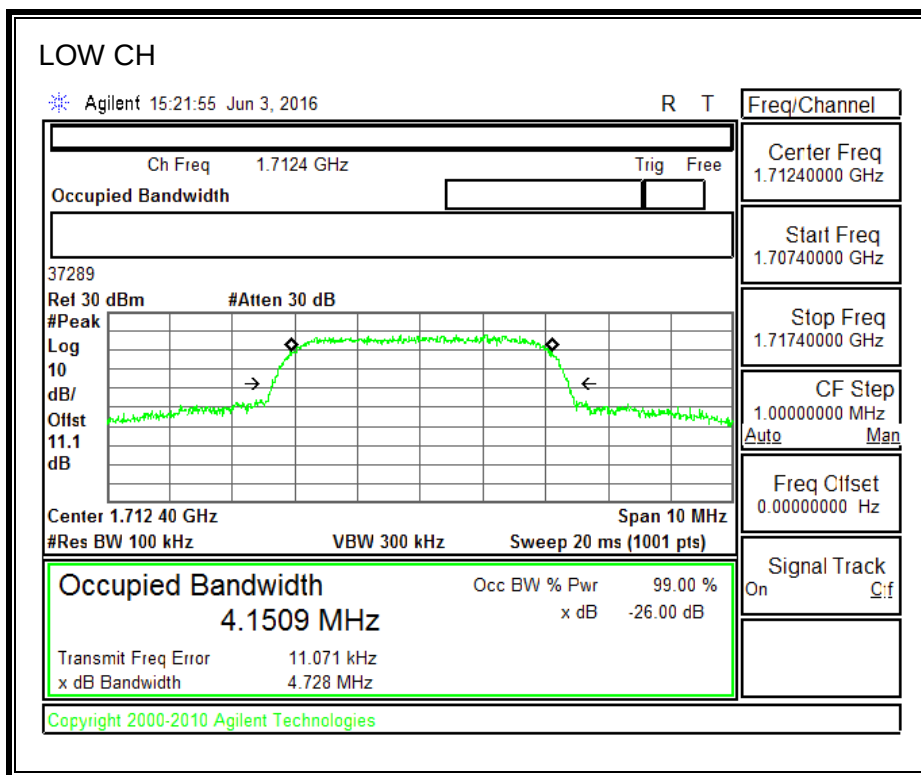

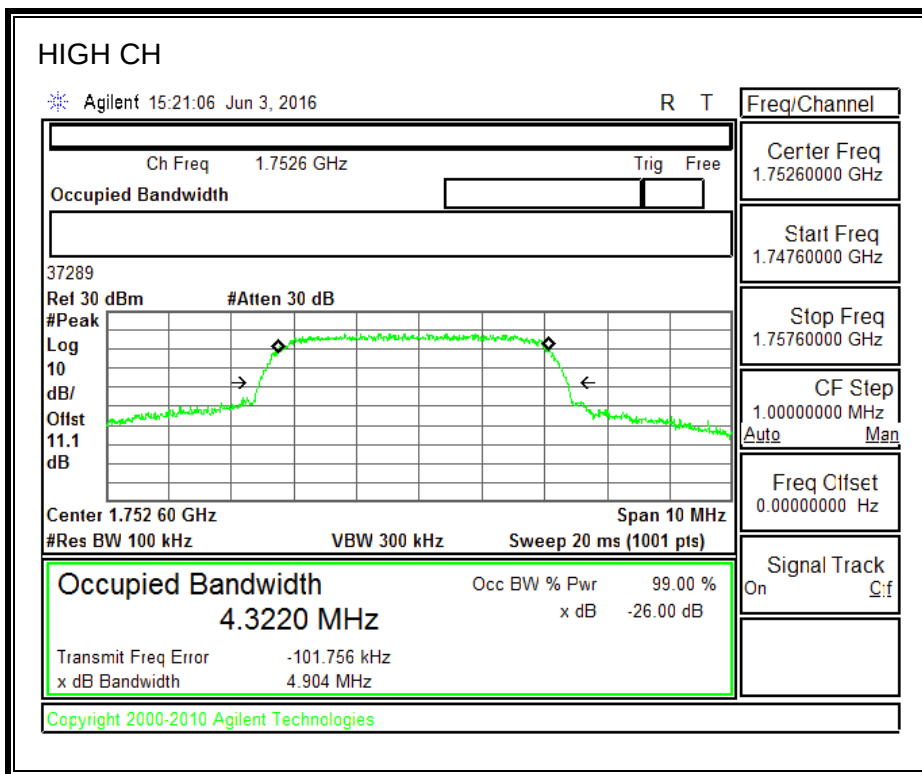

8.2. BAND EDGE

RULE PART(S)

FCC: §2.1051, §22.359, §22.917, §24.238 and §90.691

LIMITS

FCC: §22.359, §22.917, §24.238

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53

(c) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC: §90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

TEST PROCEDURE

The transmitter output was connected to a Agilent 8960 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.



For each band edge measurement:

- Set the spectrum analyzer span to include the block edge frequency (816, 823.975, 824, 849, 1850, 1910, 1710, 1755MHz)
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.



RESULTS

8.2.1. GSM-GPRS

850MHz BAND

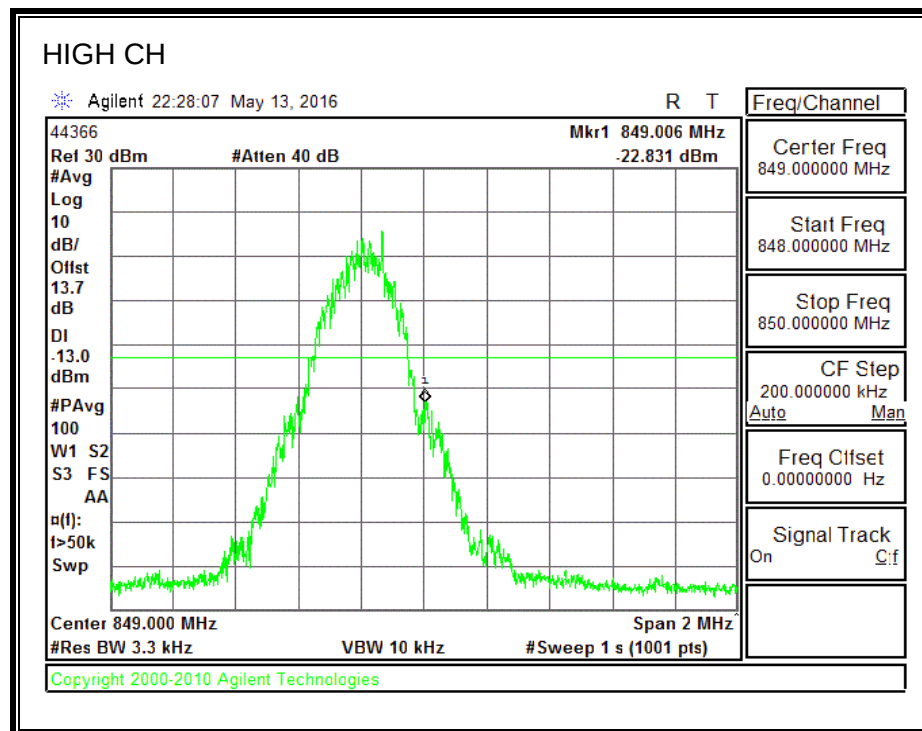
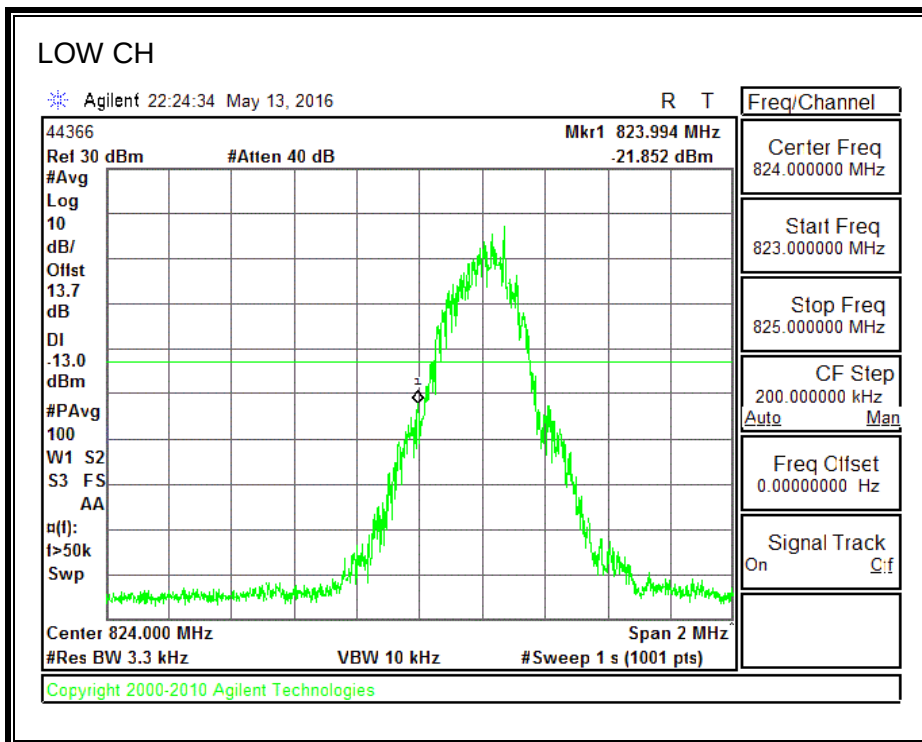


1900MHz BAND

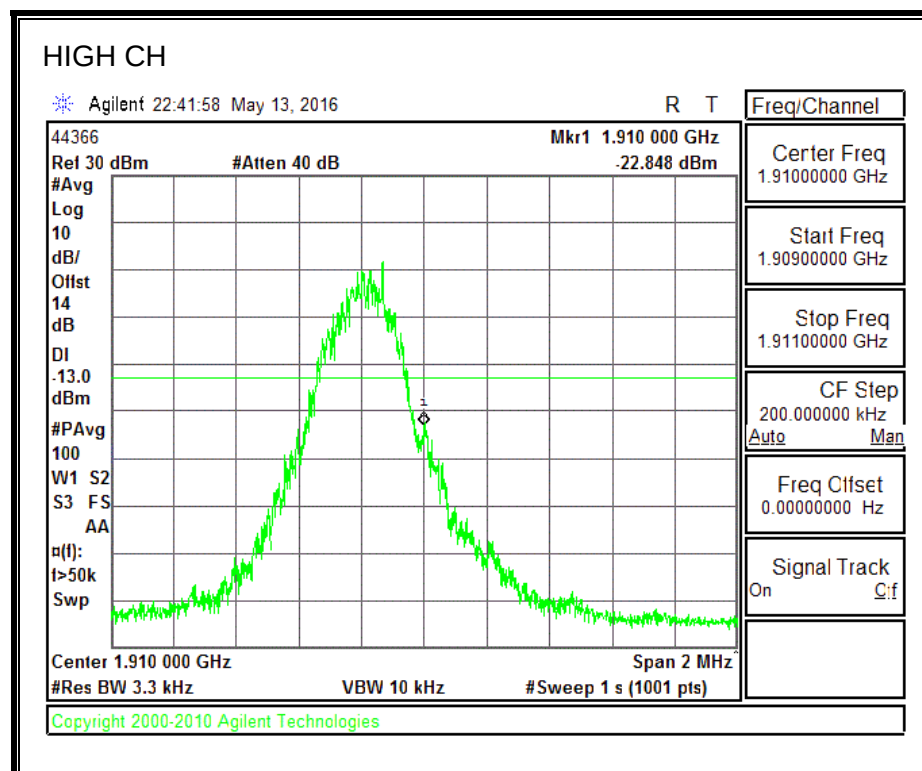
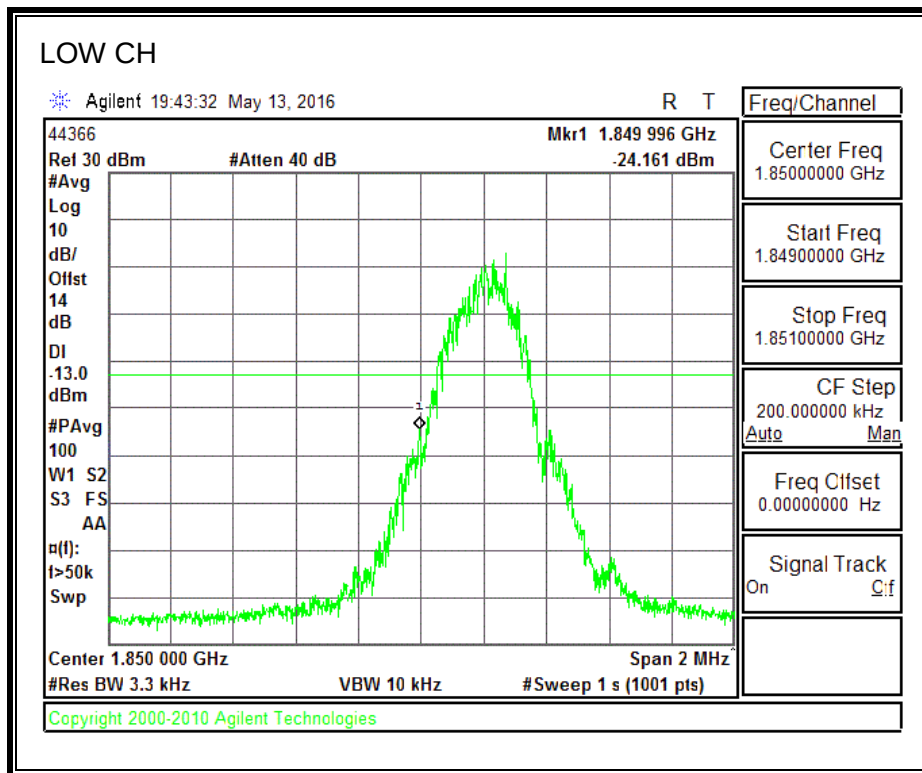


8.2.2. GSM-EGPRS

850MHz BAND

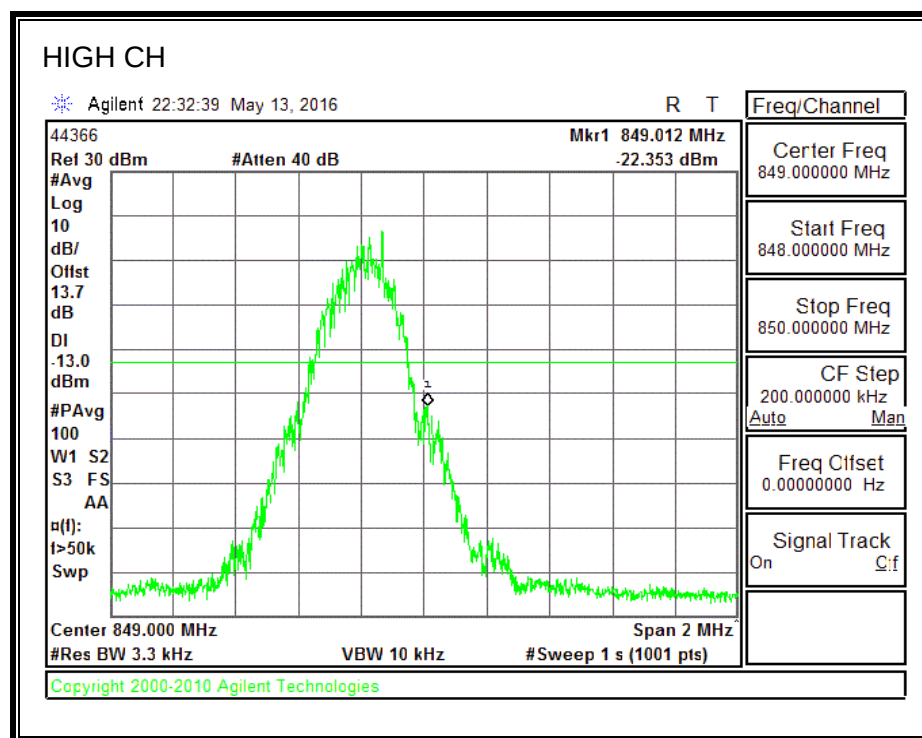
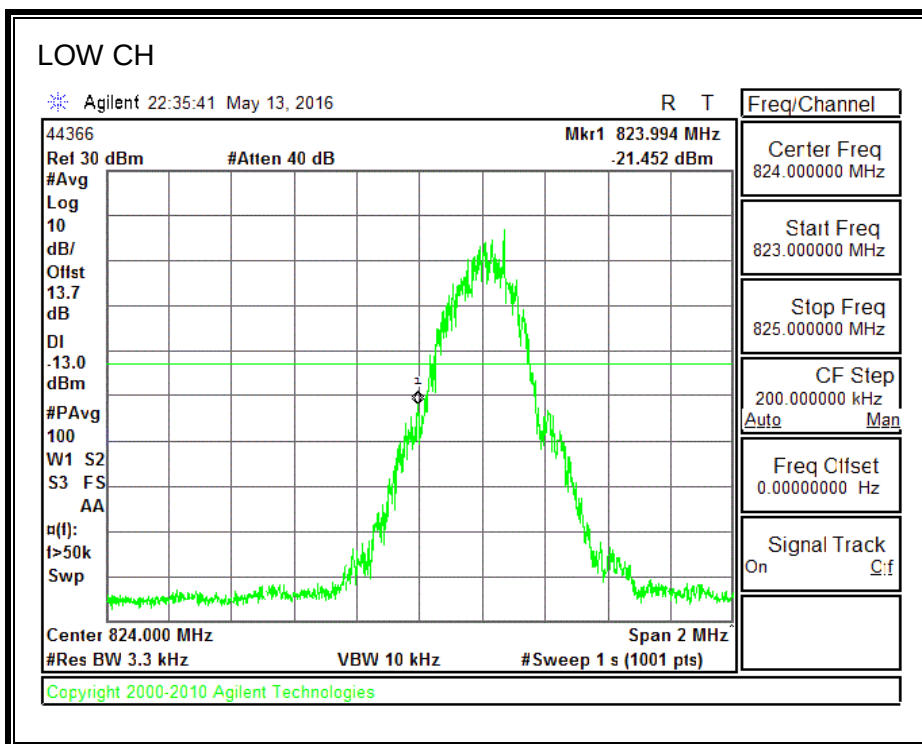


1900MHz BAND

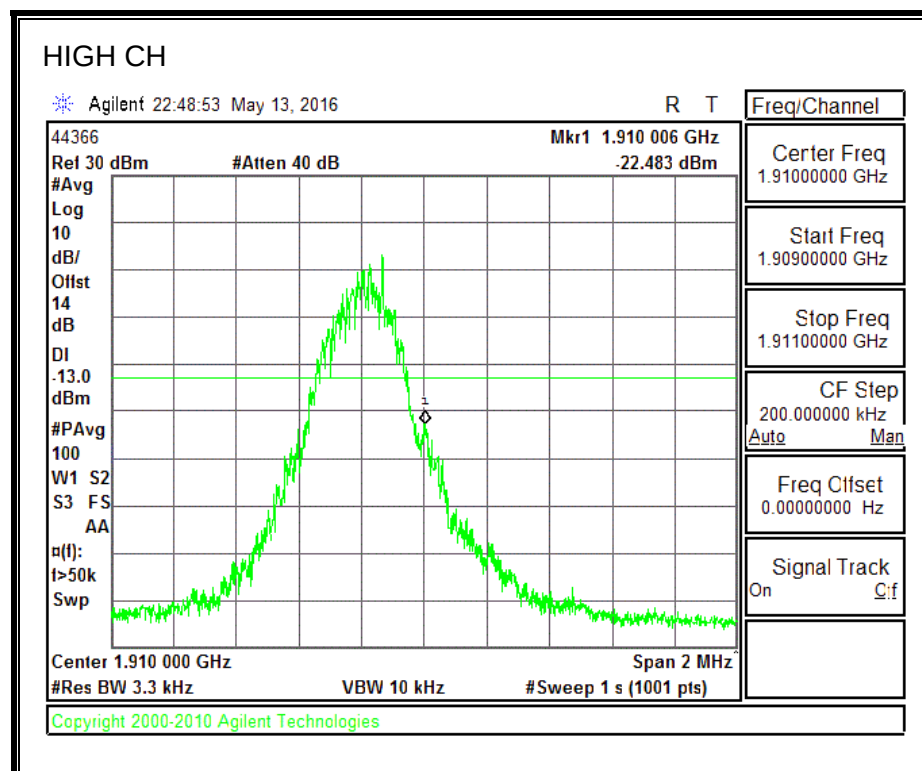
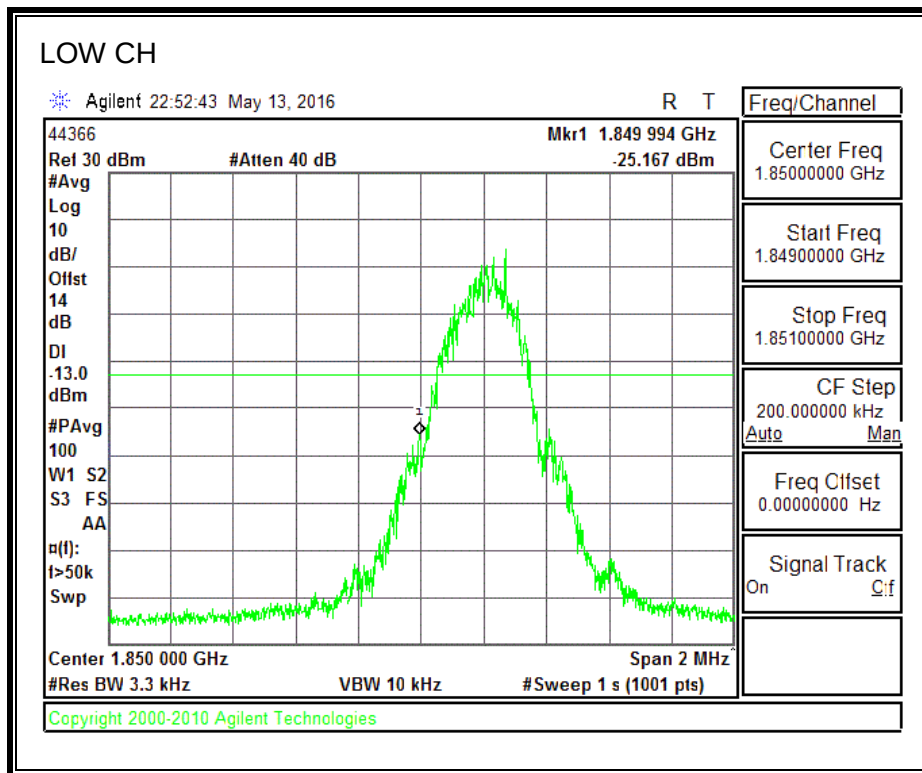


8.2.3. CDMA2000 1xRTT



850MHz BAND

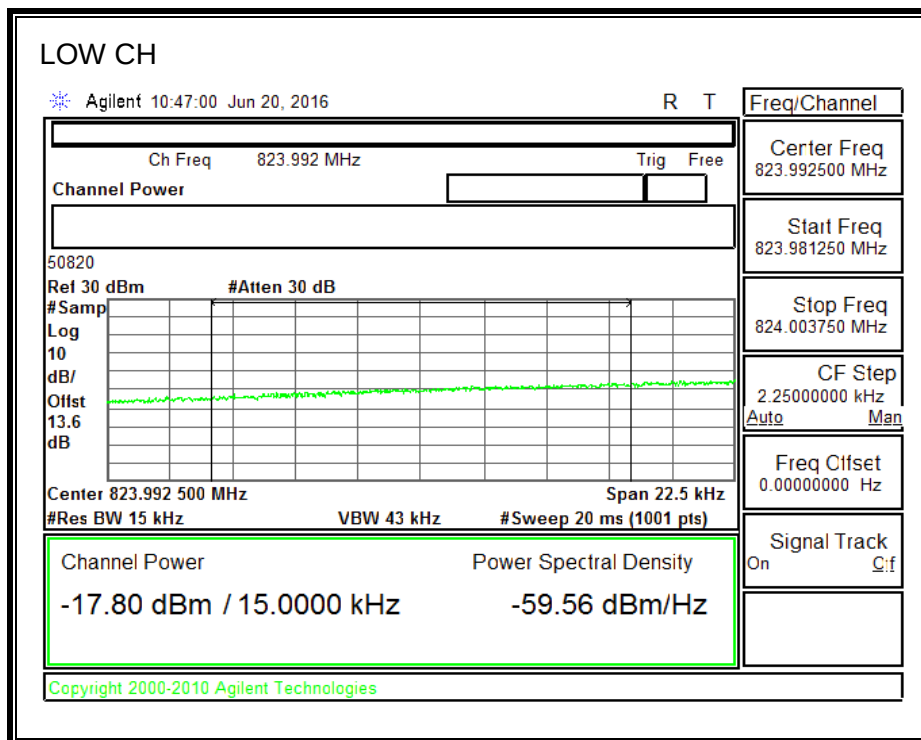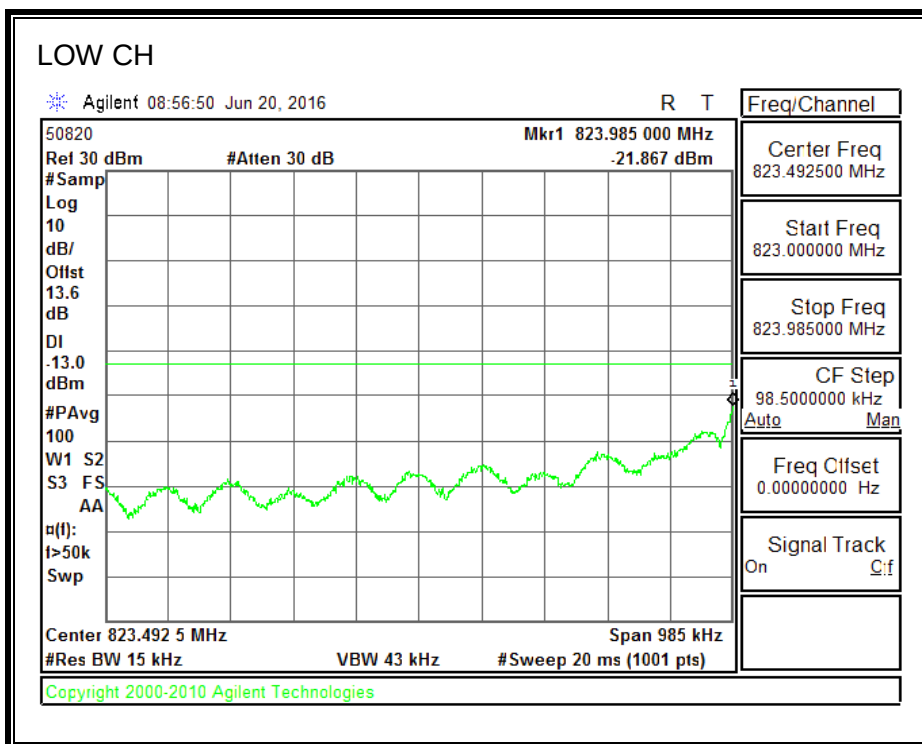


850MHz BAND

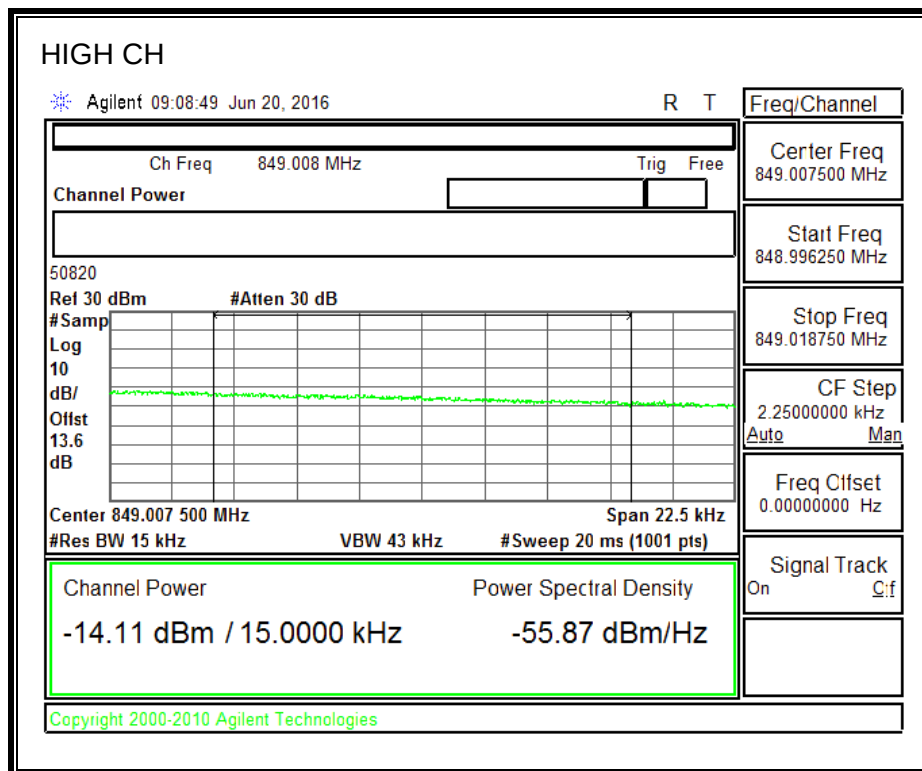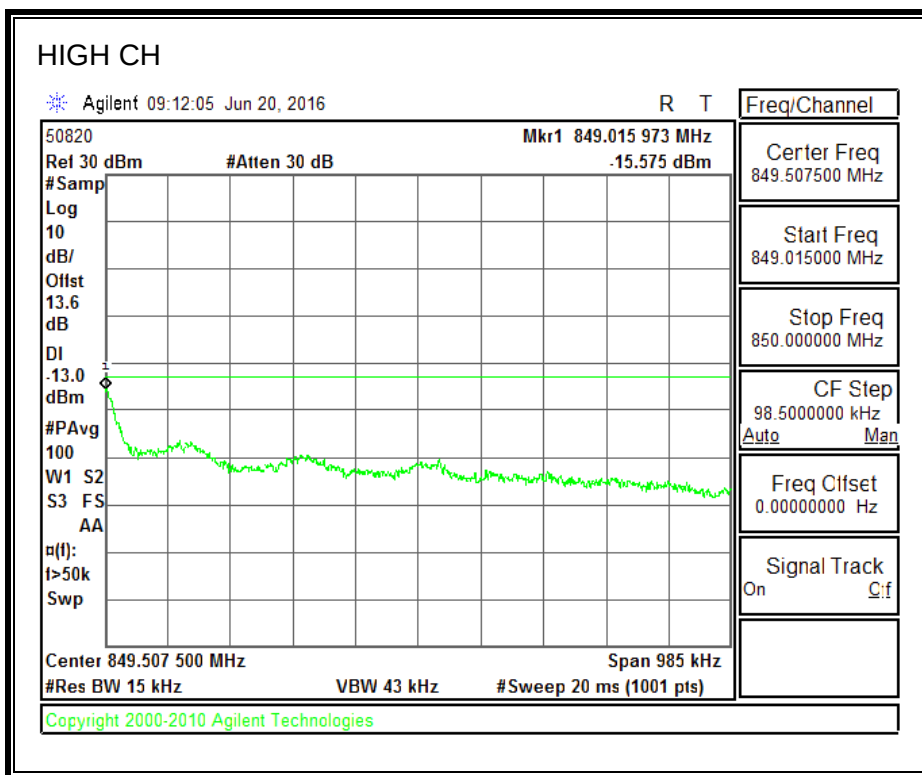


1900MHz BAND

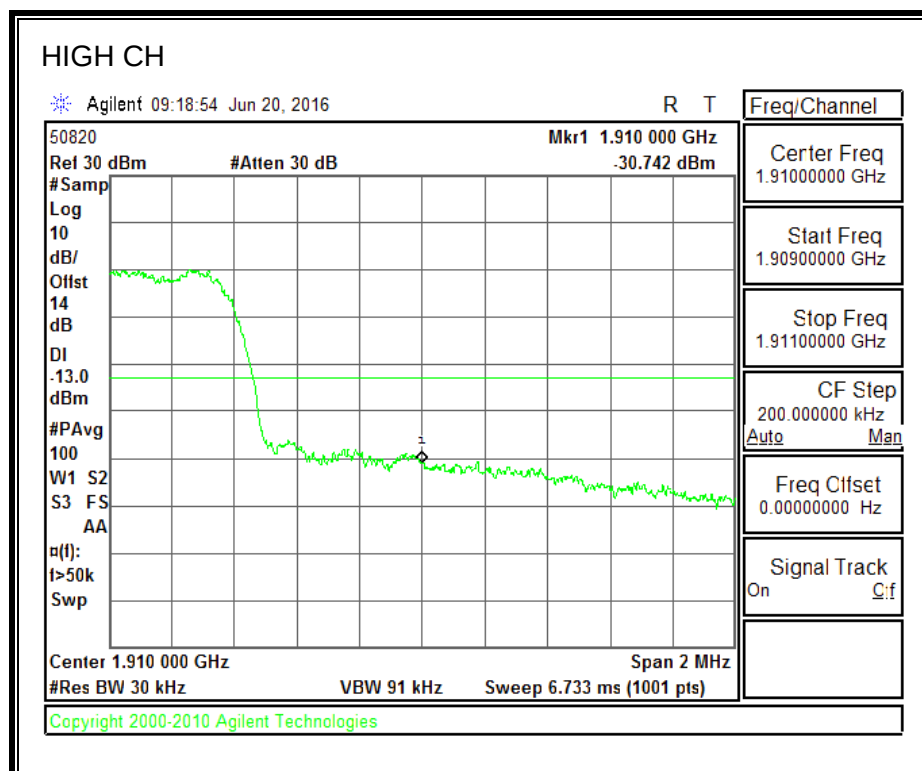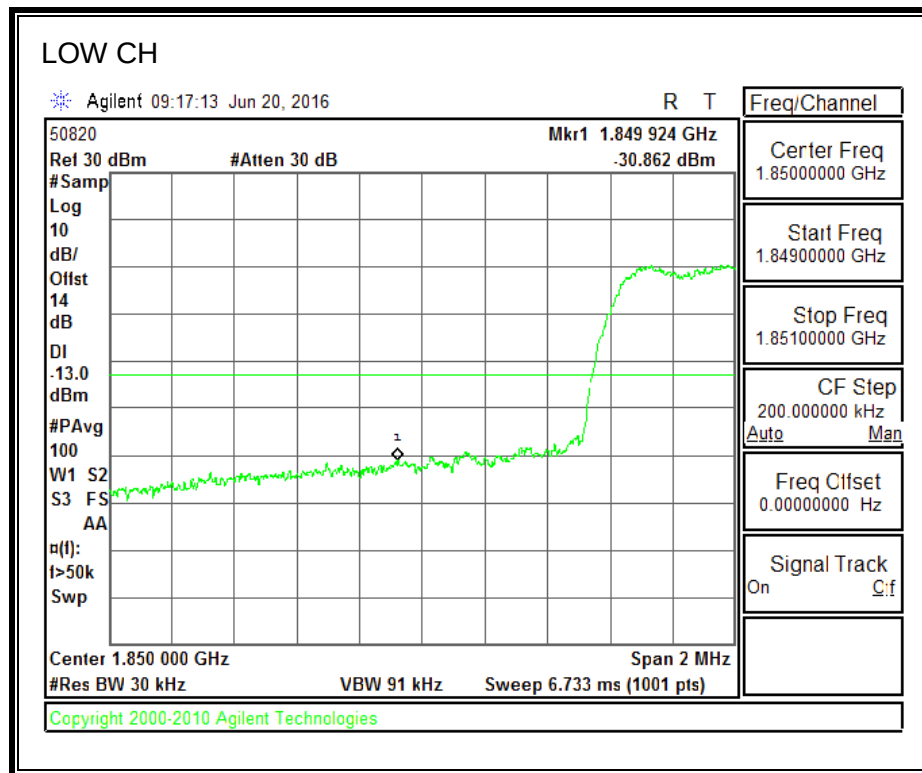


8.2.4. CDMA2000 1xRTT BC10 MASK

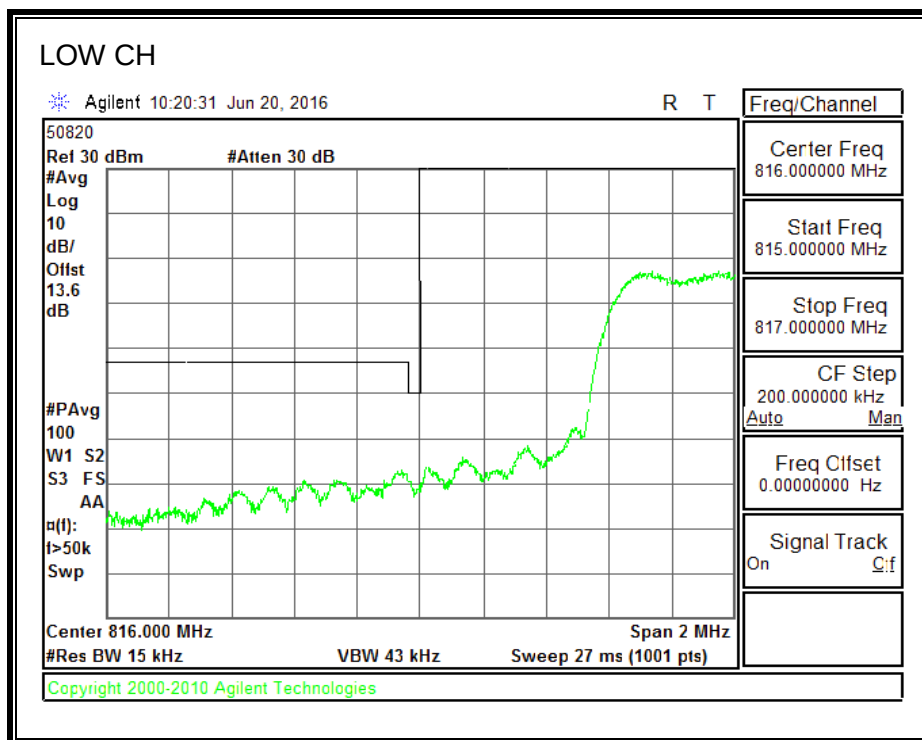


Note: RBW=1% of EBW

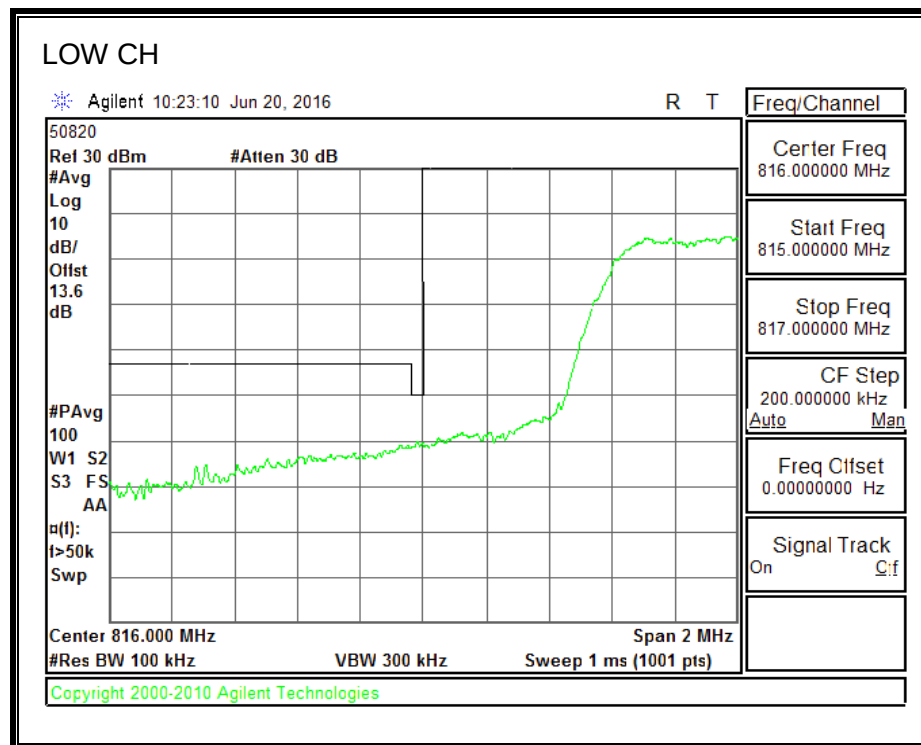

Note: RBW of 1% of 37.5KHz of outer channel frequency block

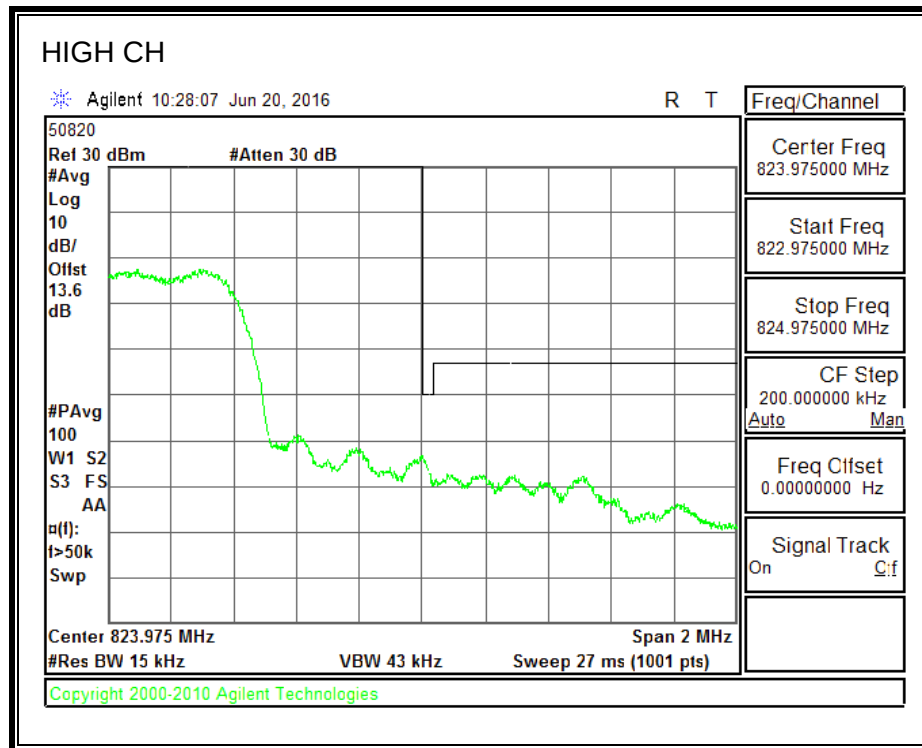



Note: RBW=1% of EBW

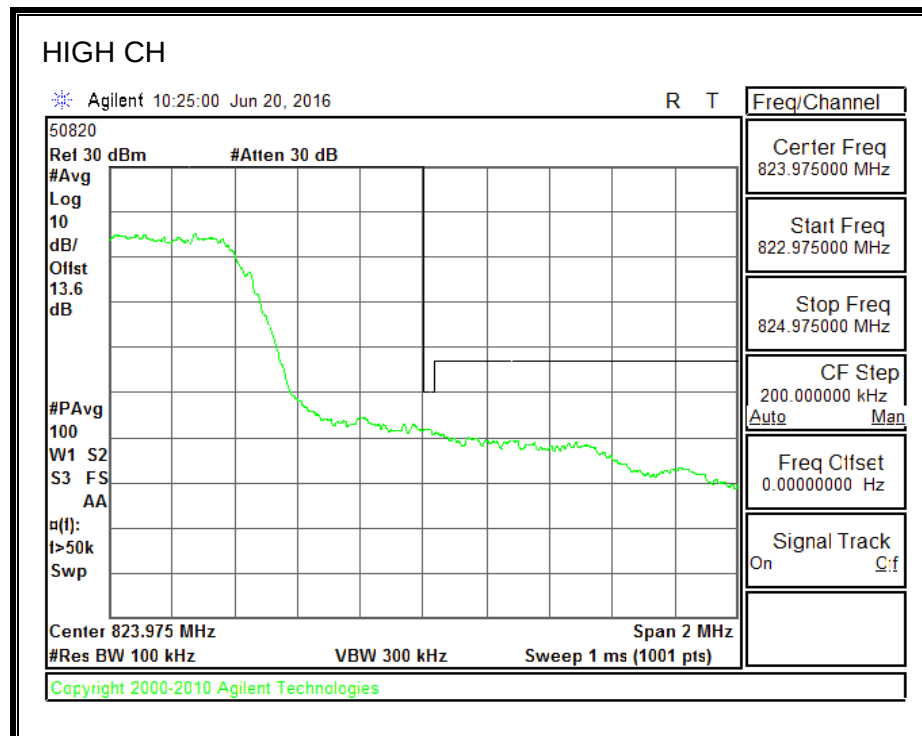



Note: RBW of 1% of 37.5KHz of outer channel frequency block

8.2.5. CDMA2000 EVDO REV A



850MHz BAND

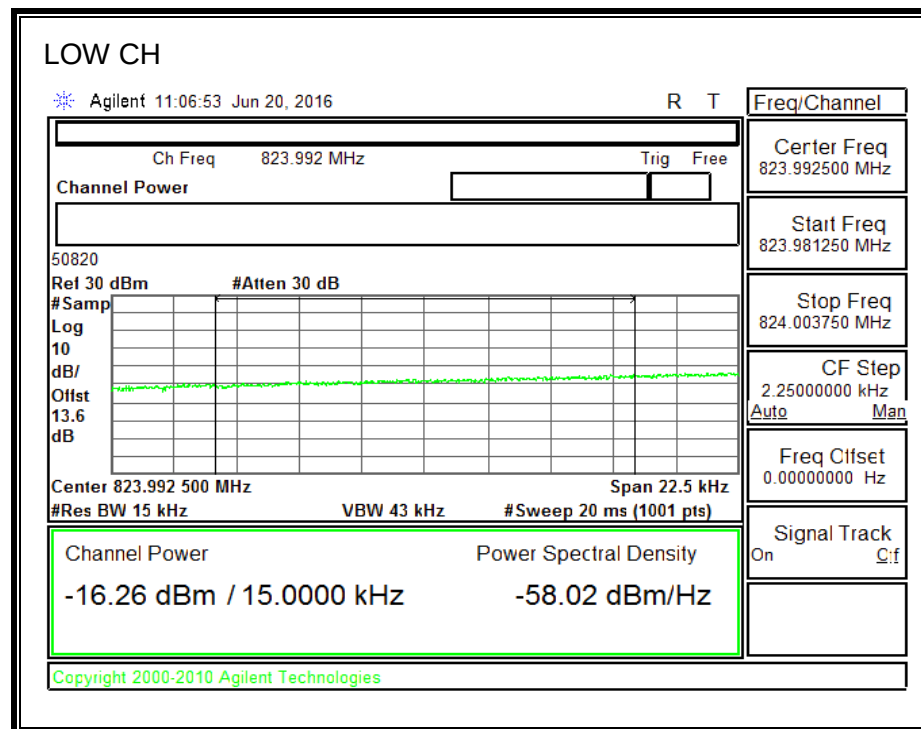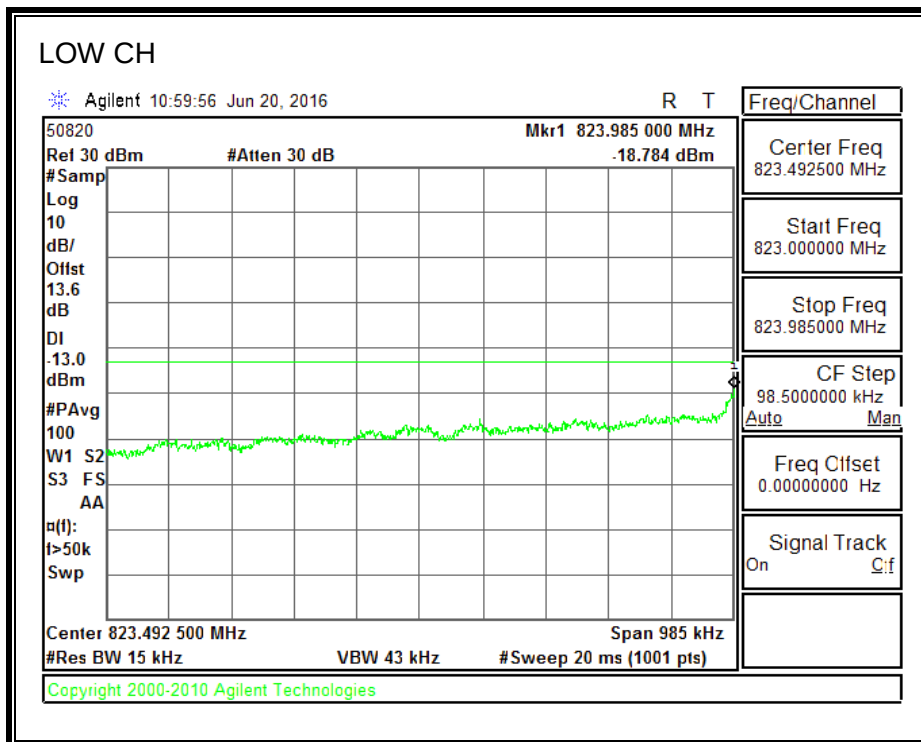


850MHz BAND

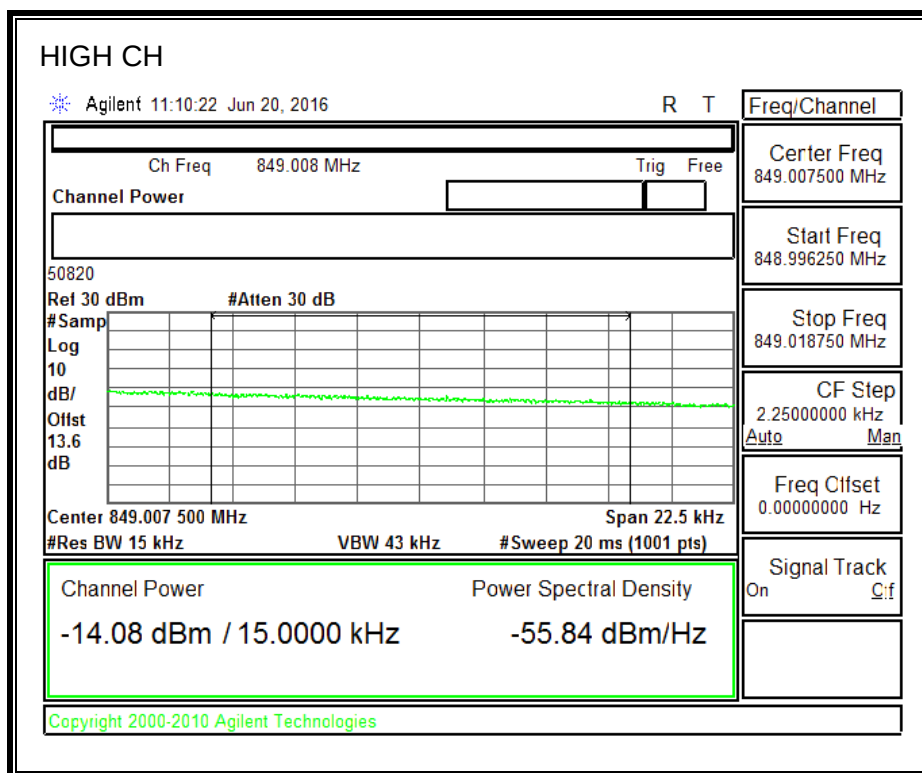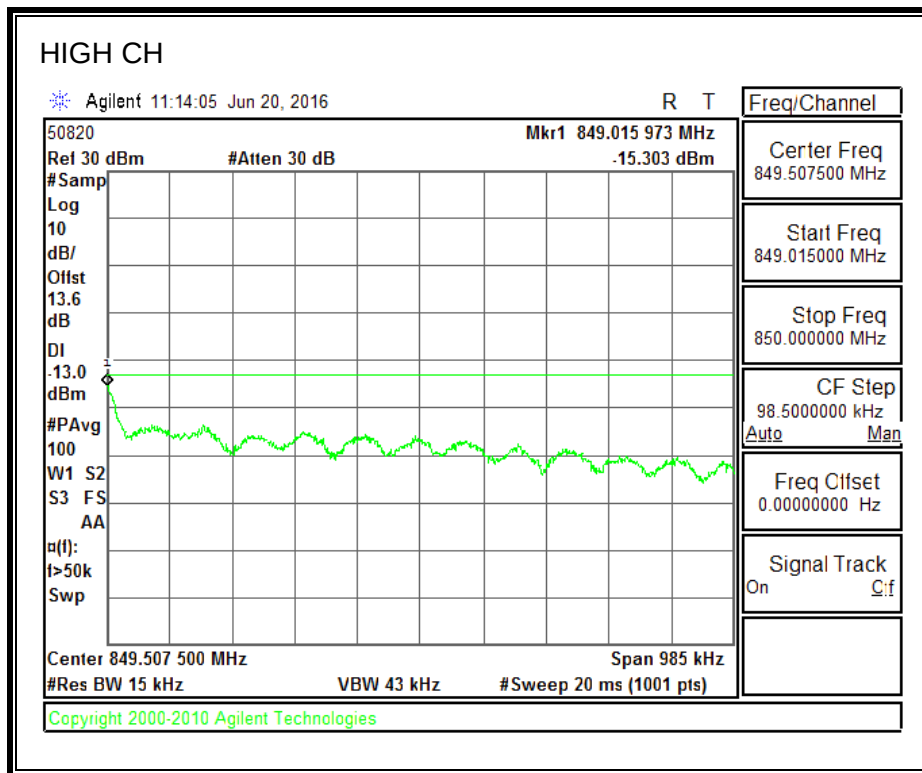


1900MHz BAND

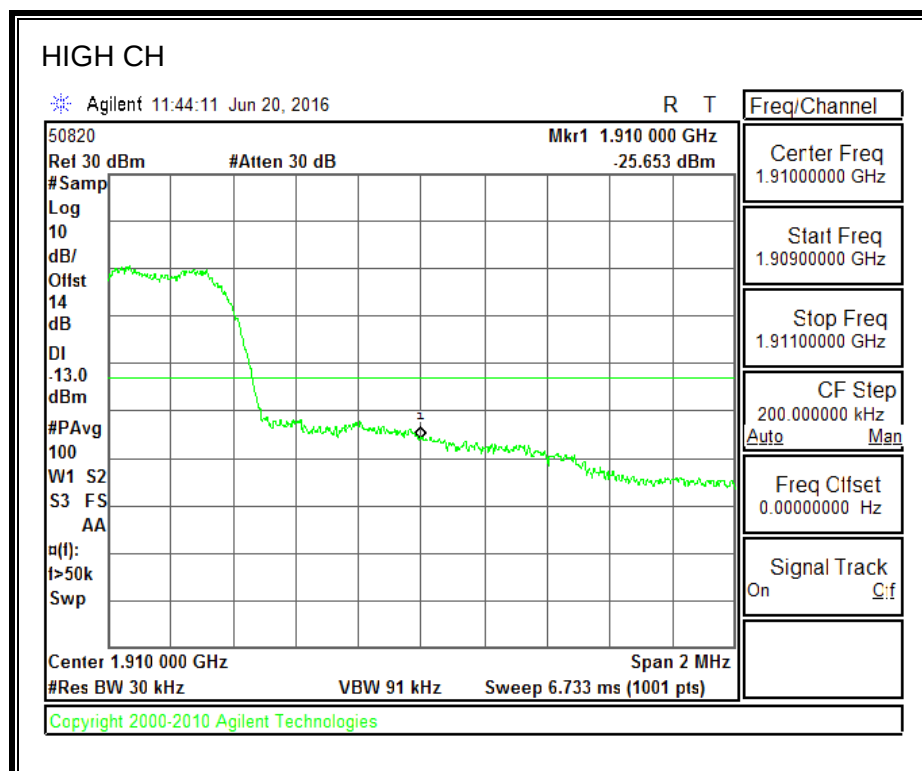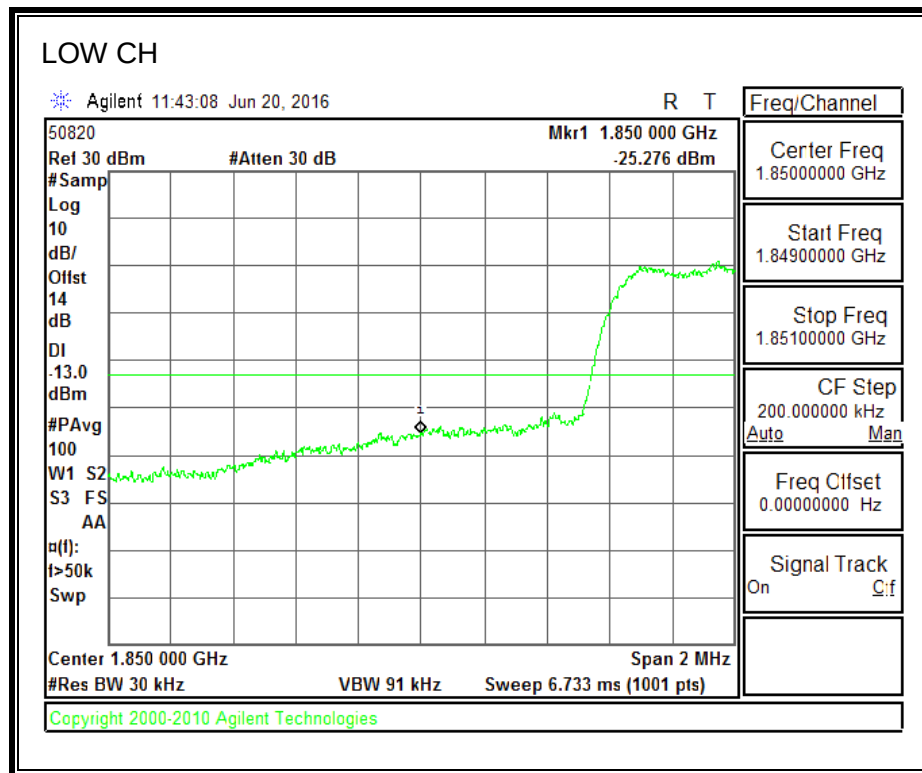


8.2.6. CDMA2000 EVDO REV A BC10 MASK

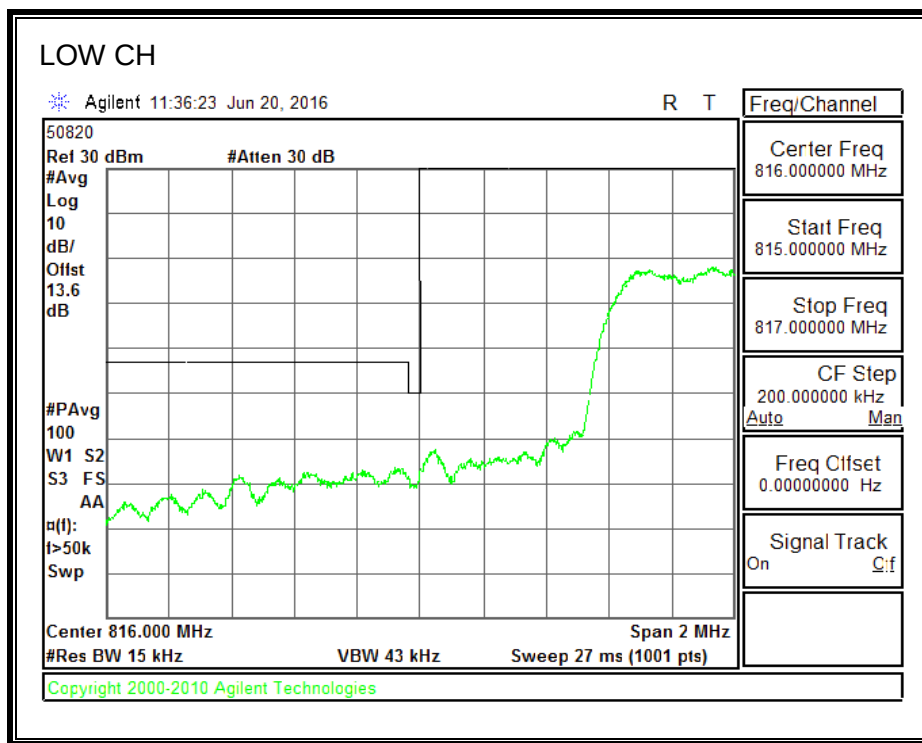


Note: RBW=1% of EBW

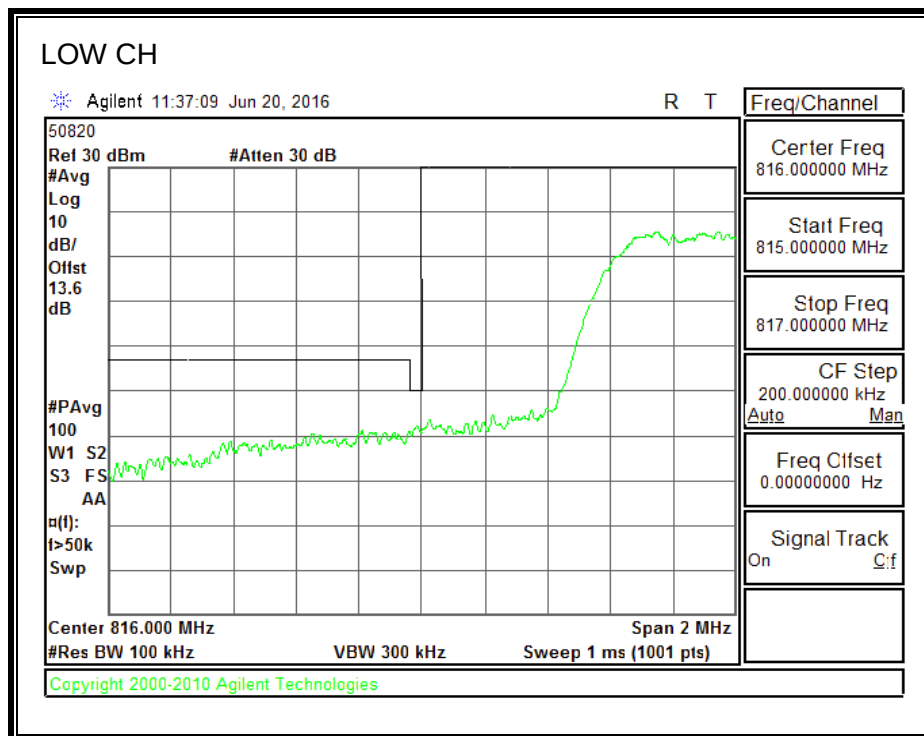

Note: RBW of 1% of 37.5KHz of outer channel frequency block

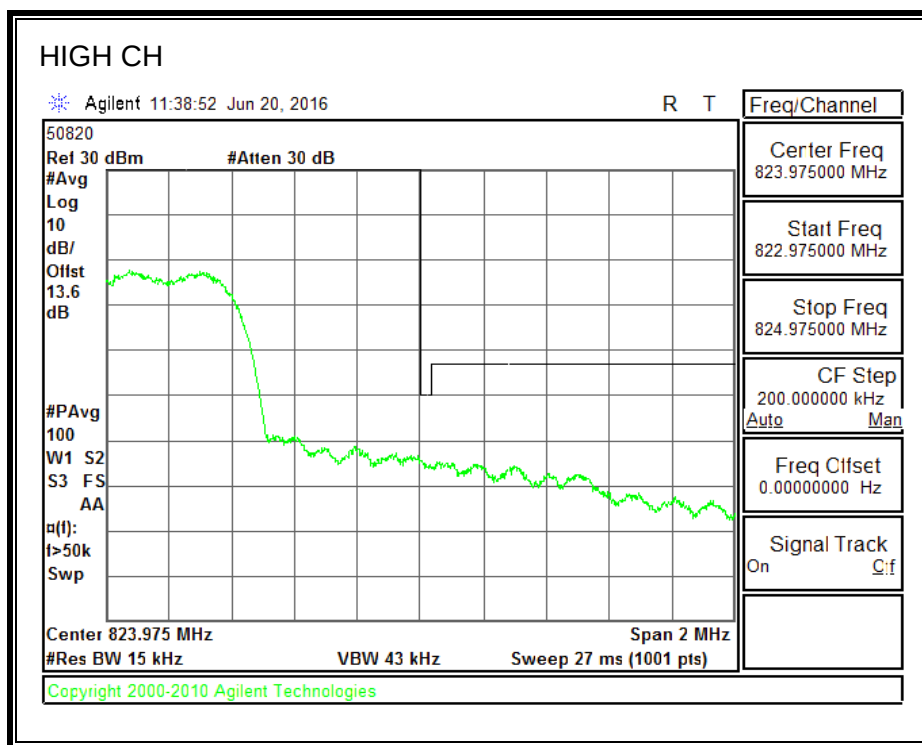



Note: RBW=1% of EBW

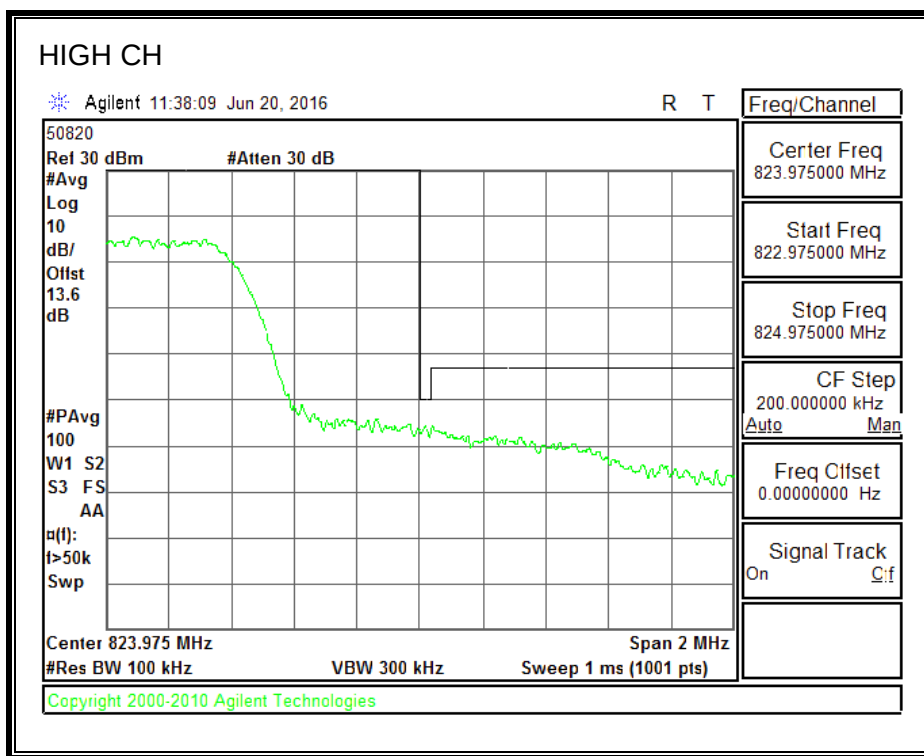



Note: RBW of 1% of 37.5KHz of outer channel frequency block

8.2.7. UMTS REL 99



850MHz BAND

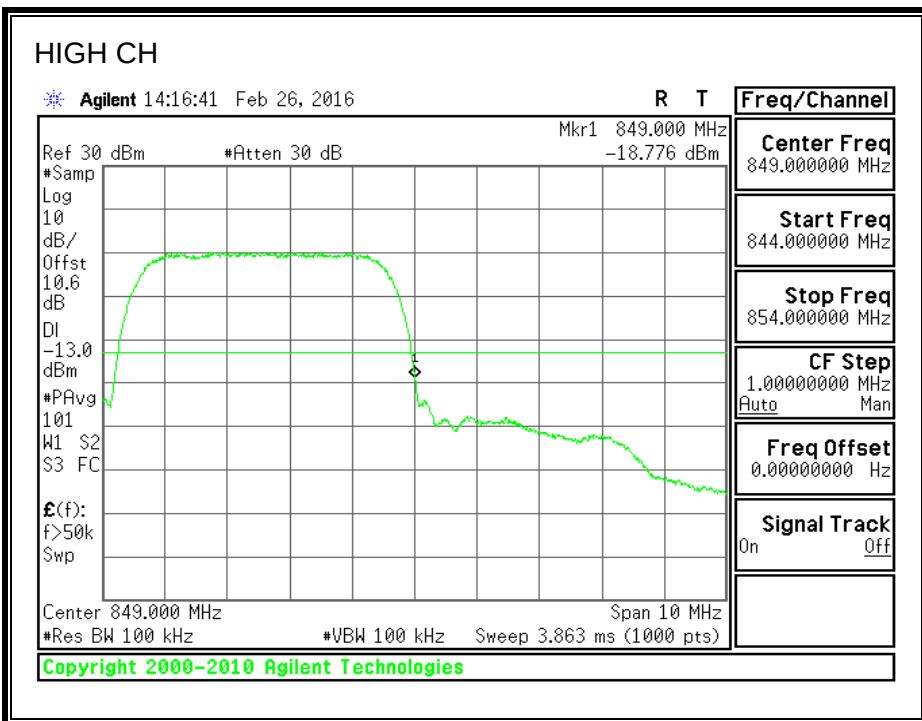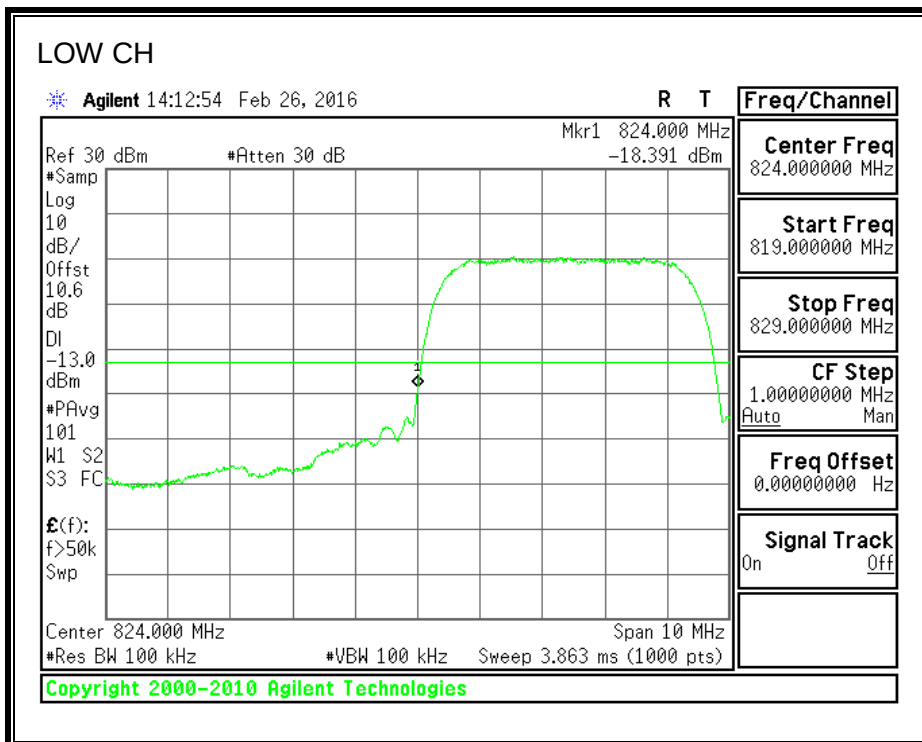

1900MHz BAND

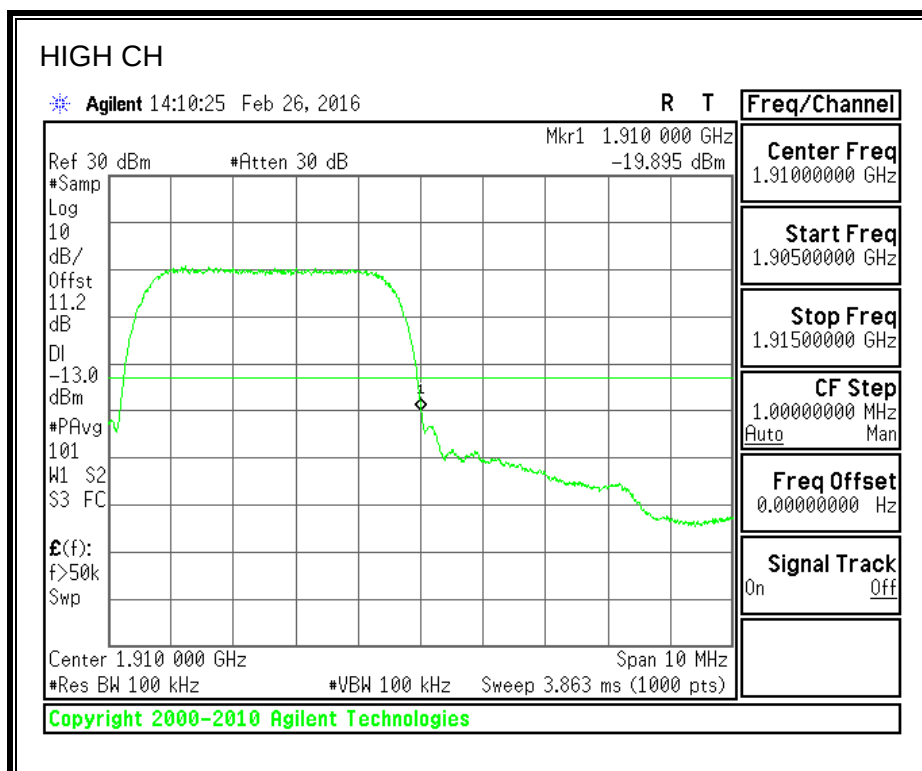
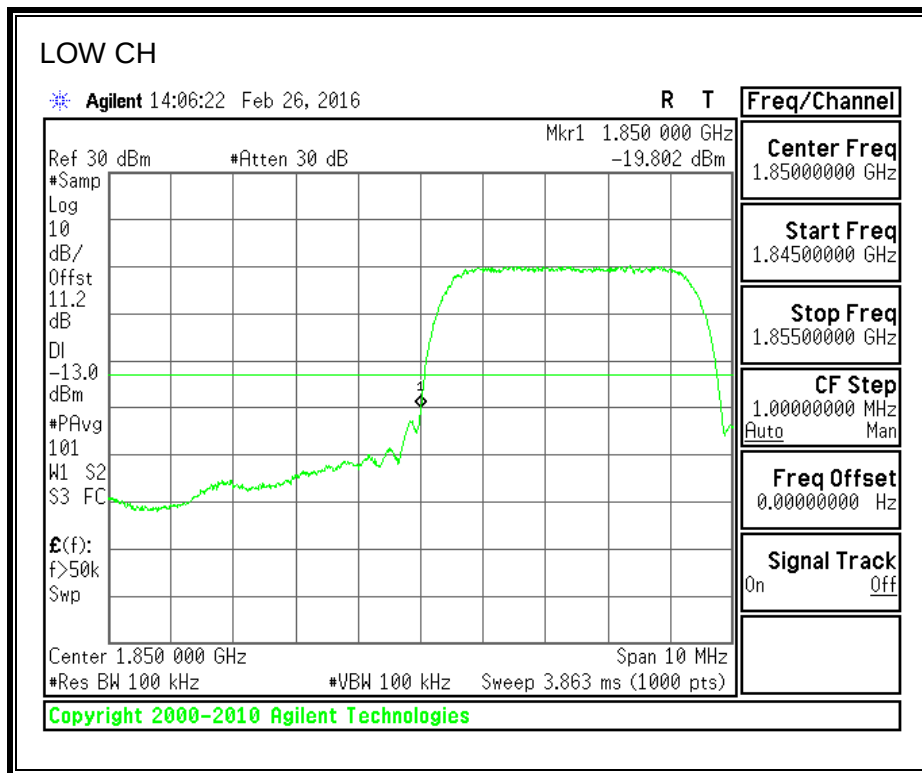


1700MHz BAND

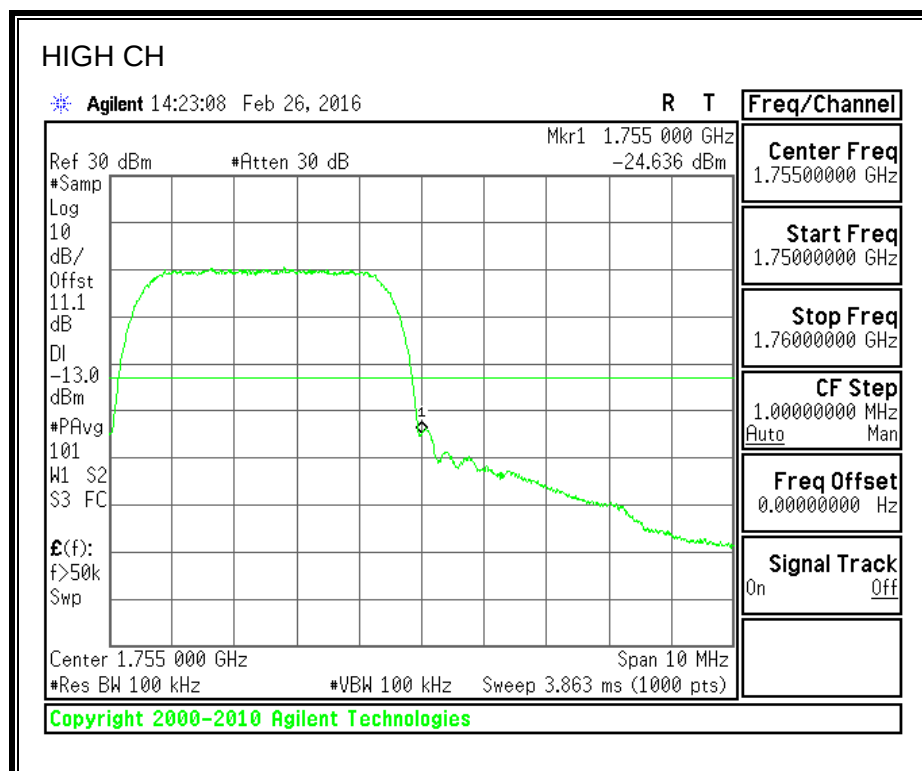
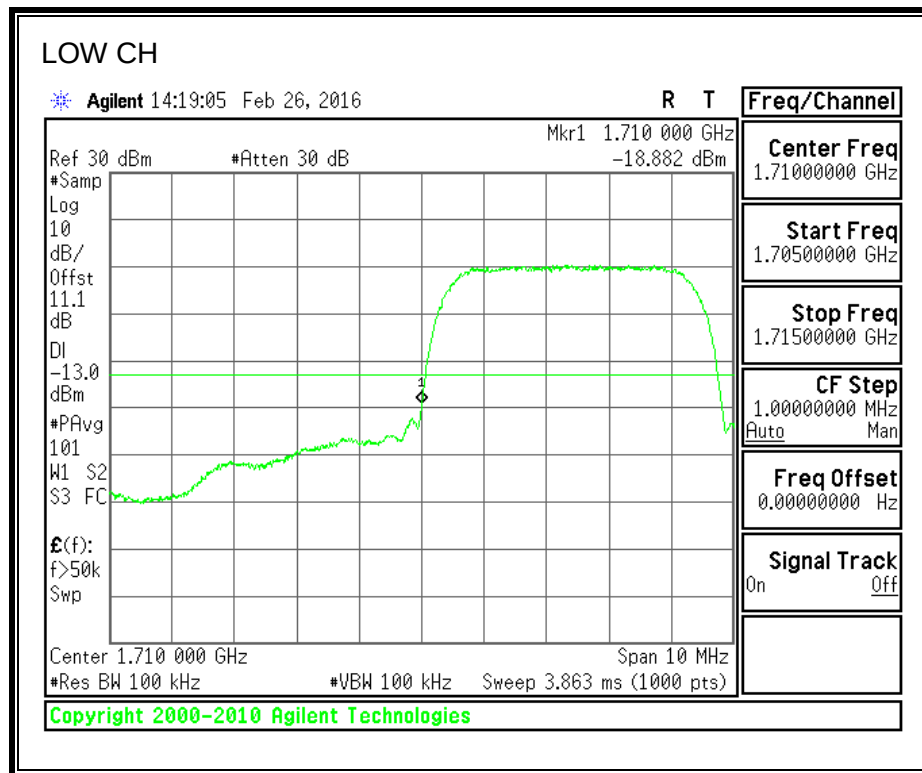


8.2.8. UMTS HSDPA



850MHz BAND

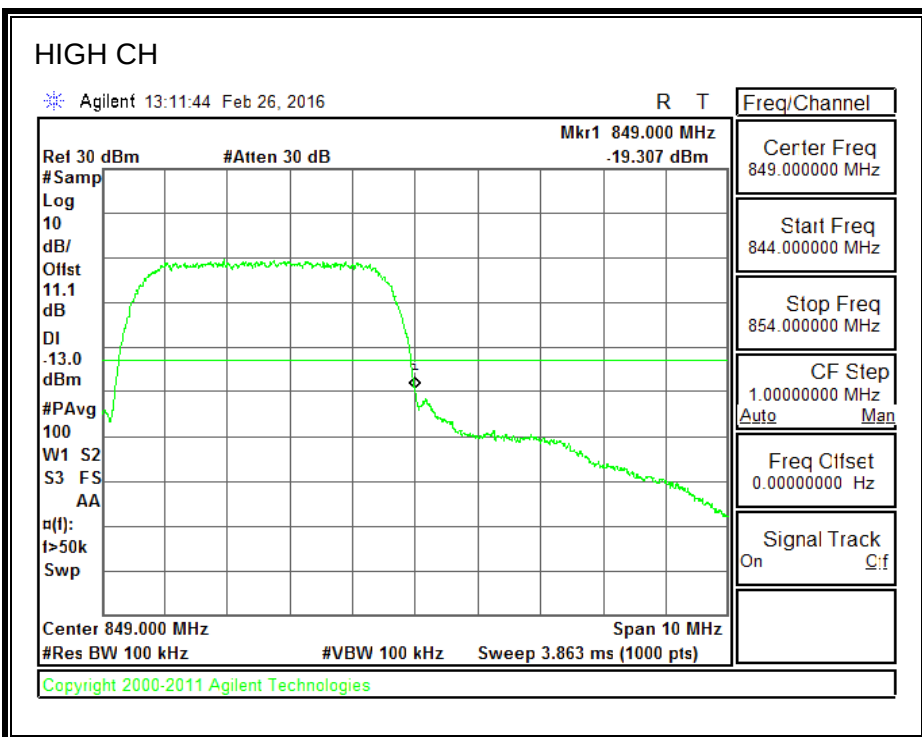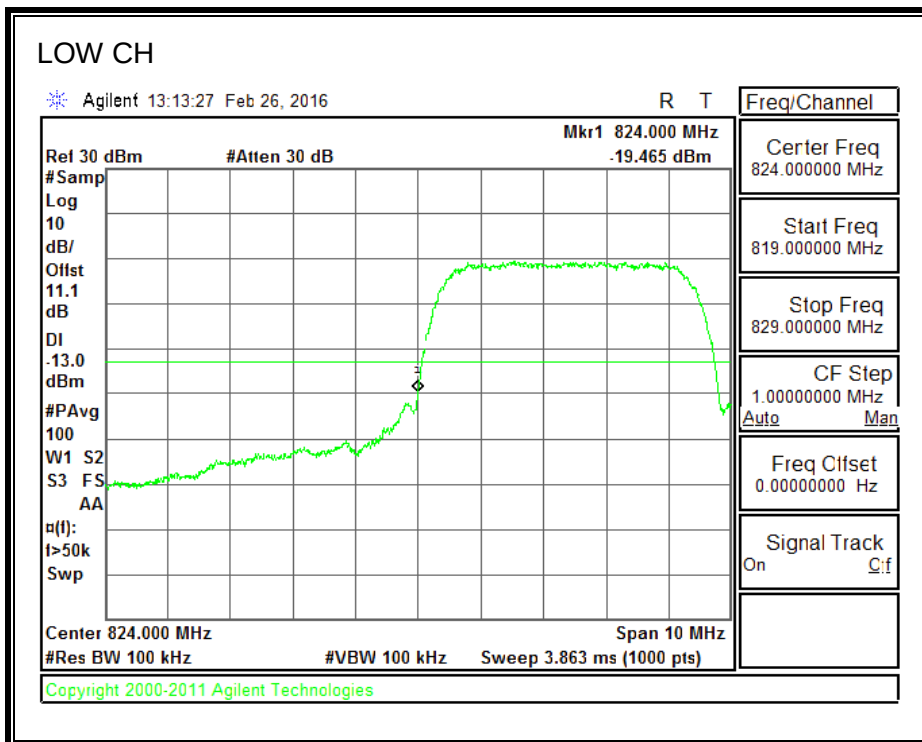

1900MHz BAND

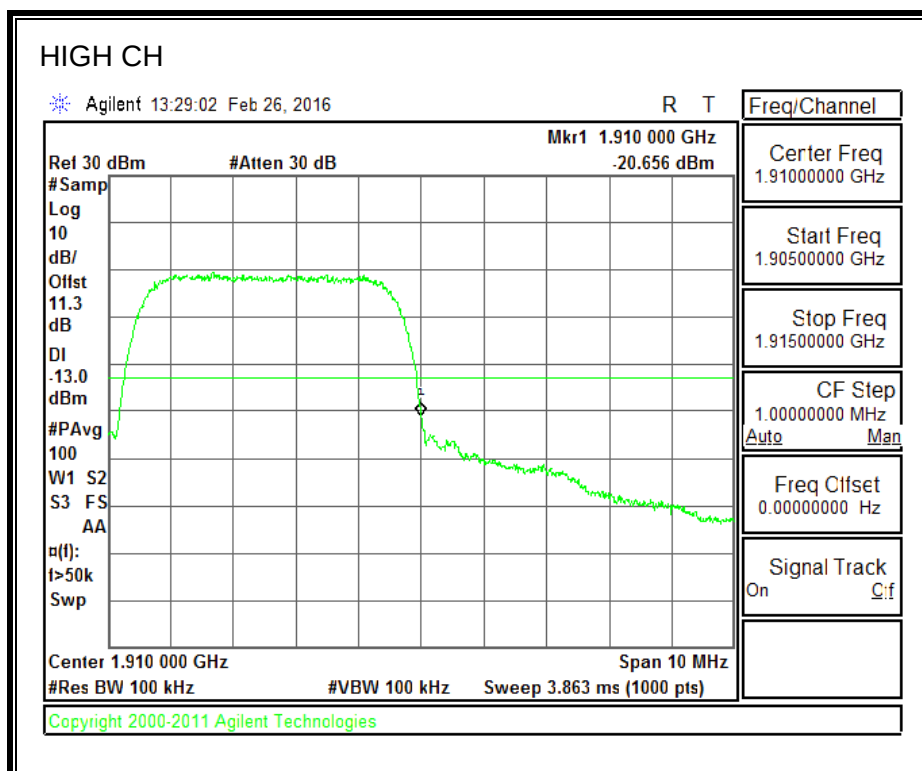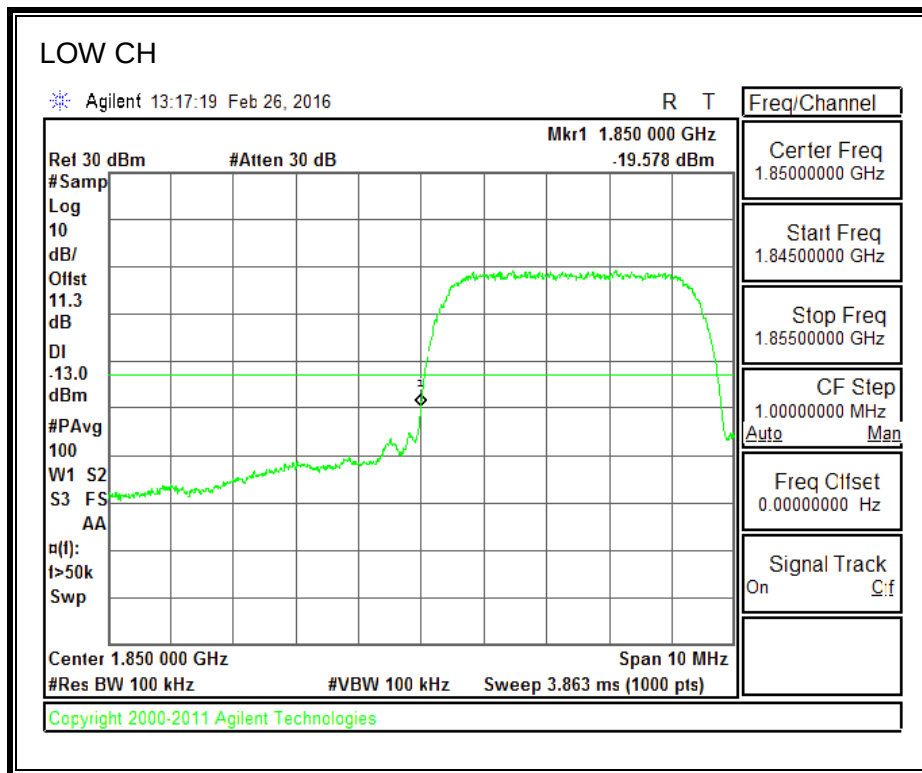

1700MHz BAND

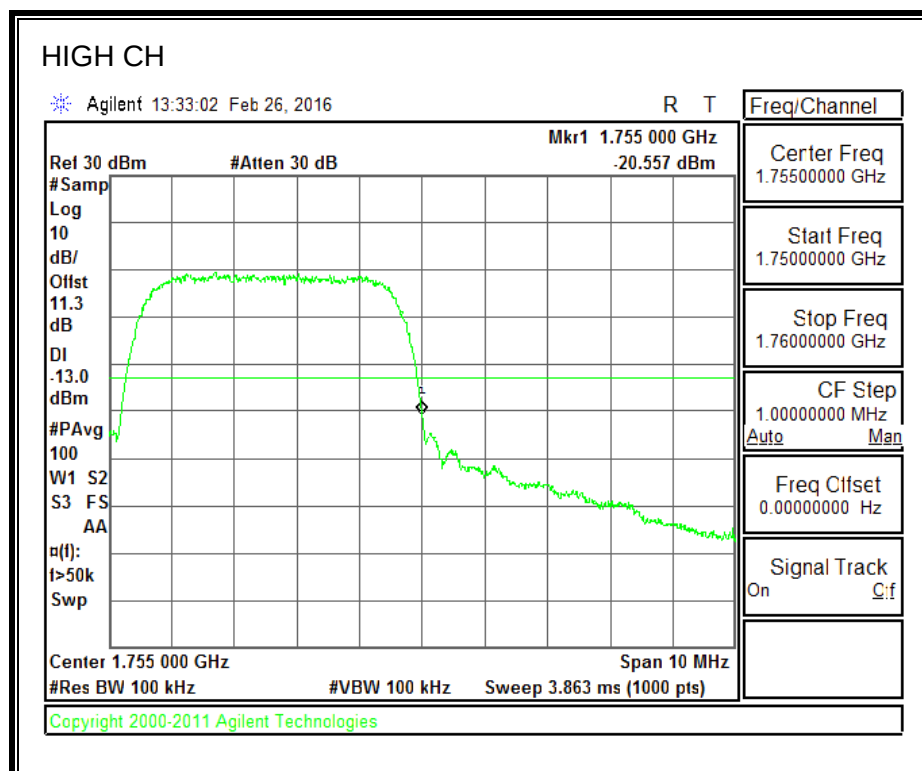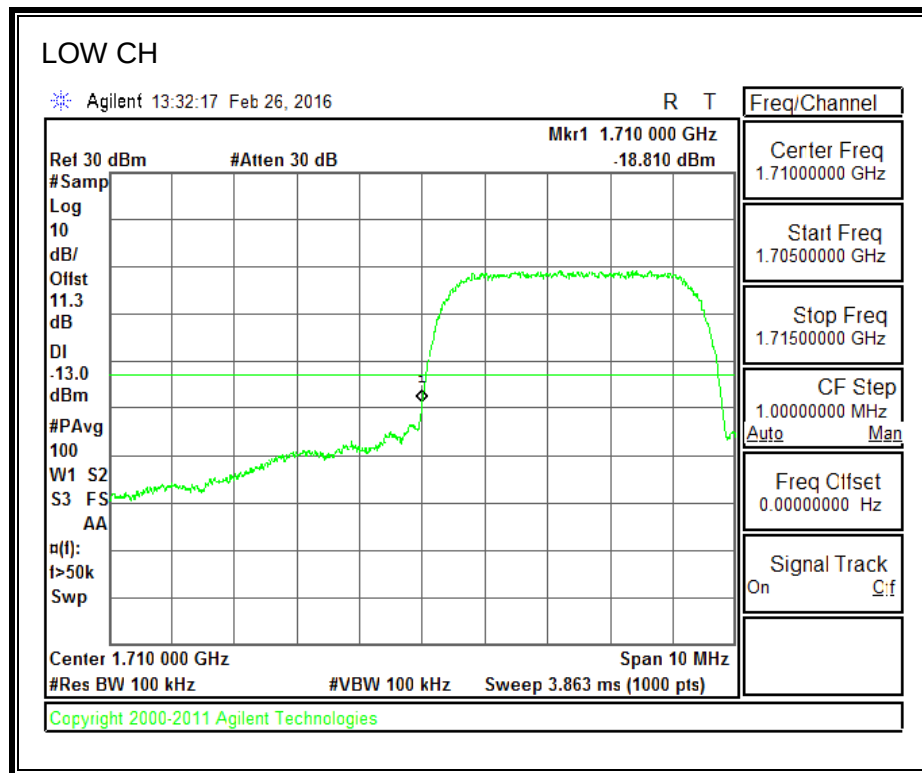

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.359, §22.917, §24.238 and §90.691

LIMITS

FCC: §22.359, §22.917, §24.238

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53

(c) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

§90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.



For each out of band emissions measurement:


- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

RESULTS


8.3.1. GSM-GPRS



850MHz BAND

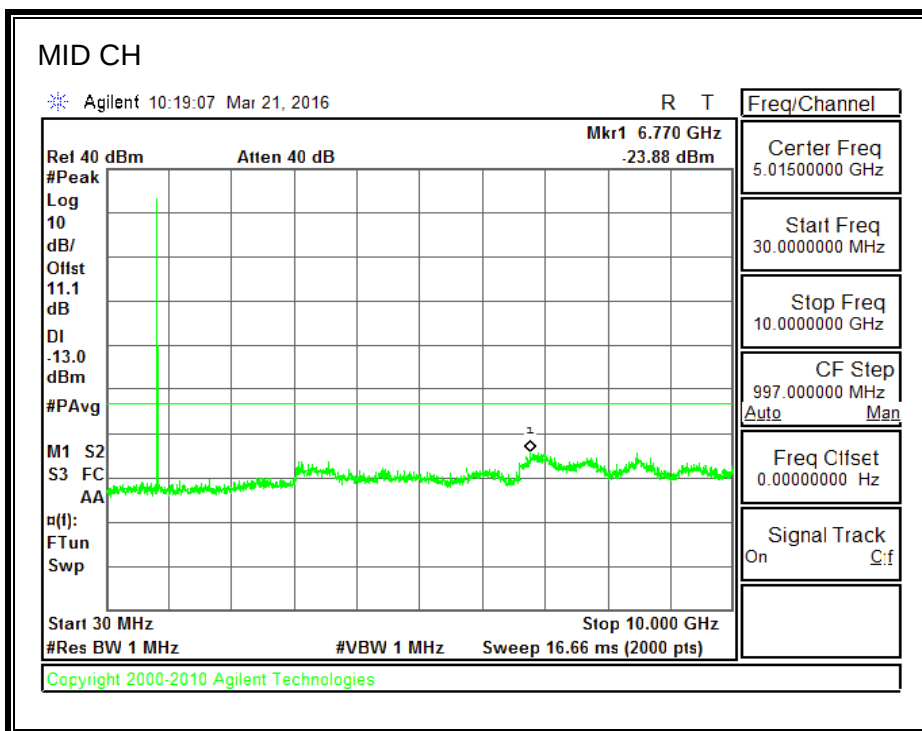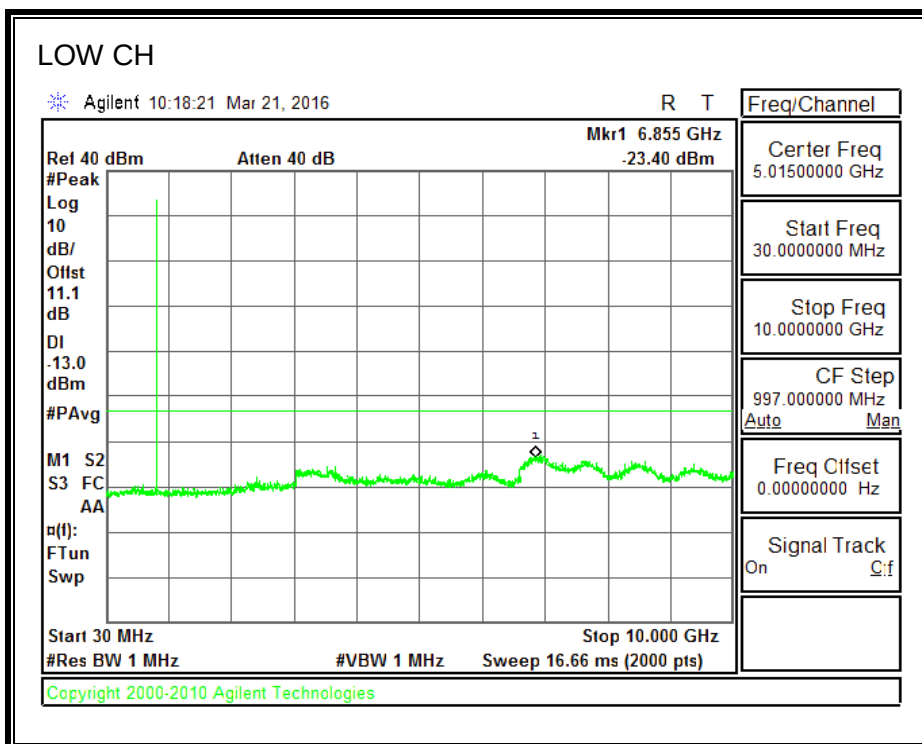

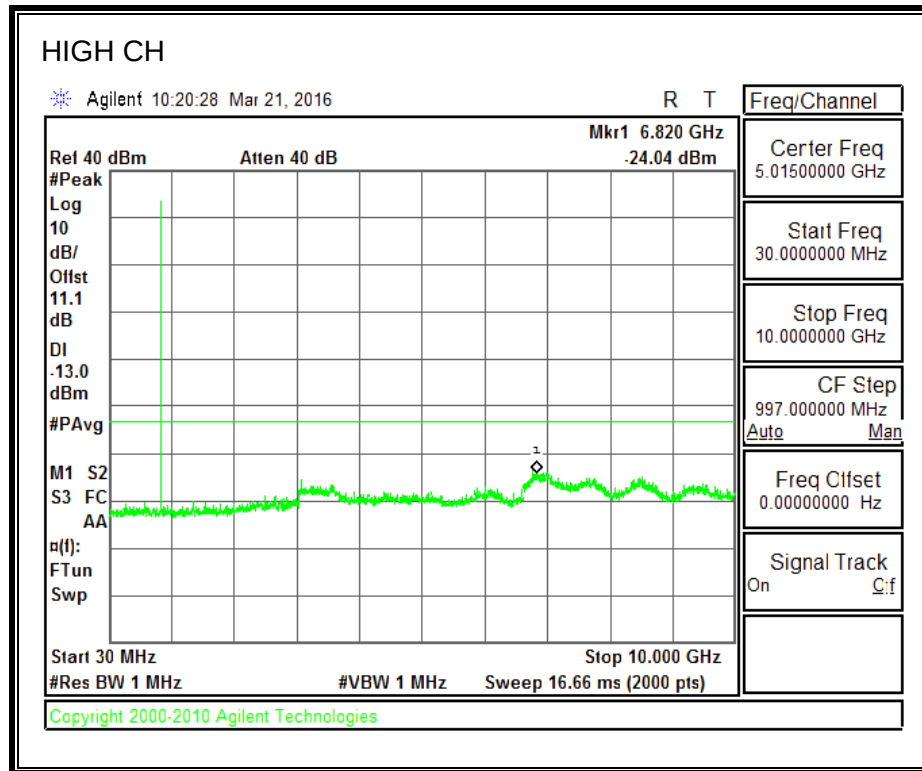



1900MHz BAND

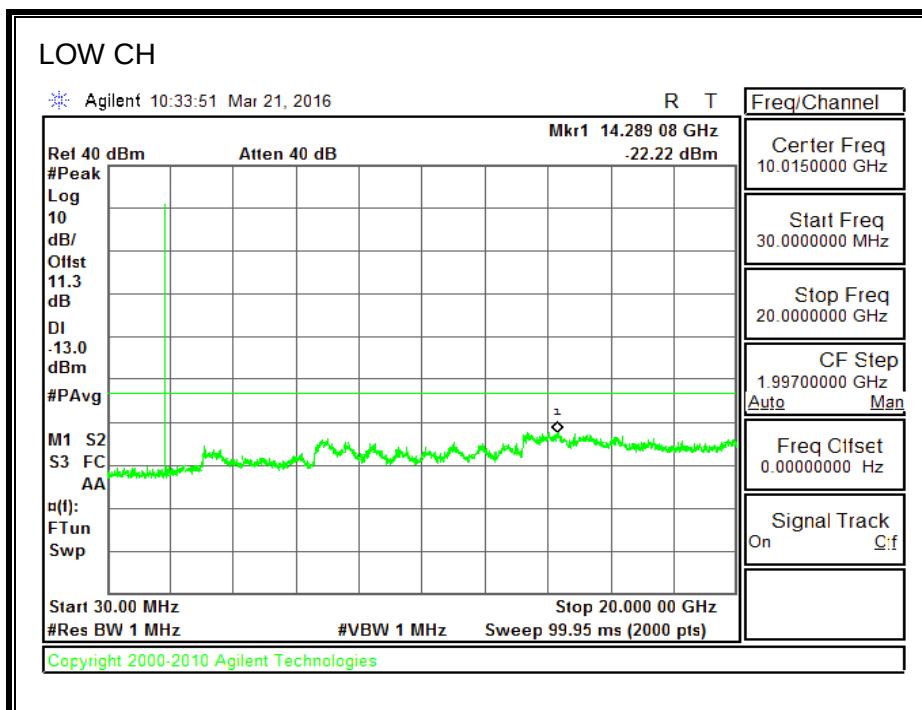


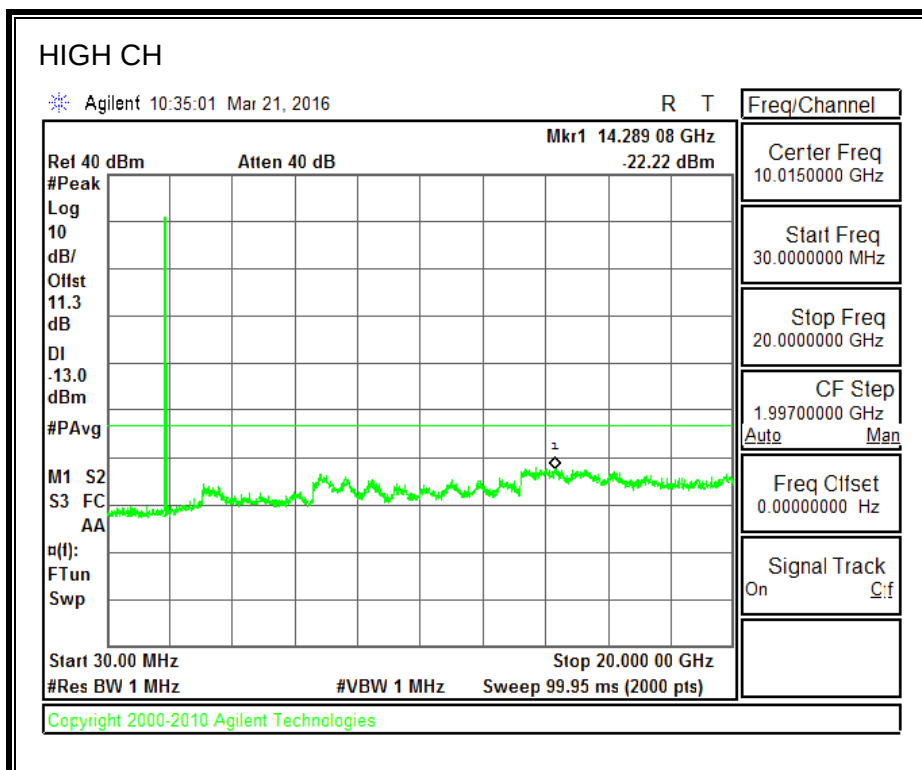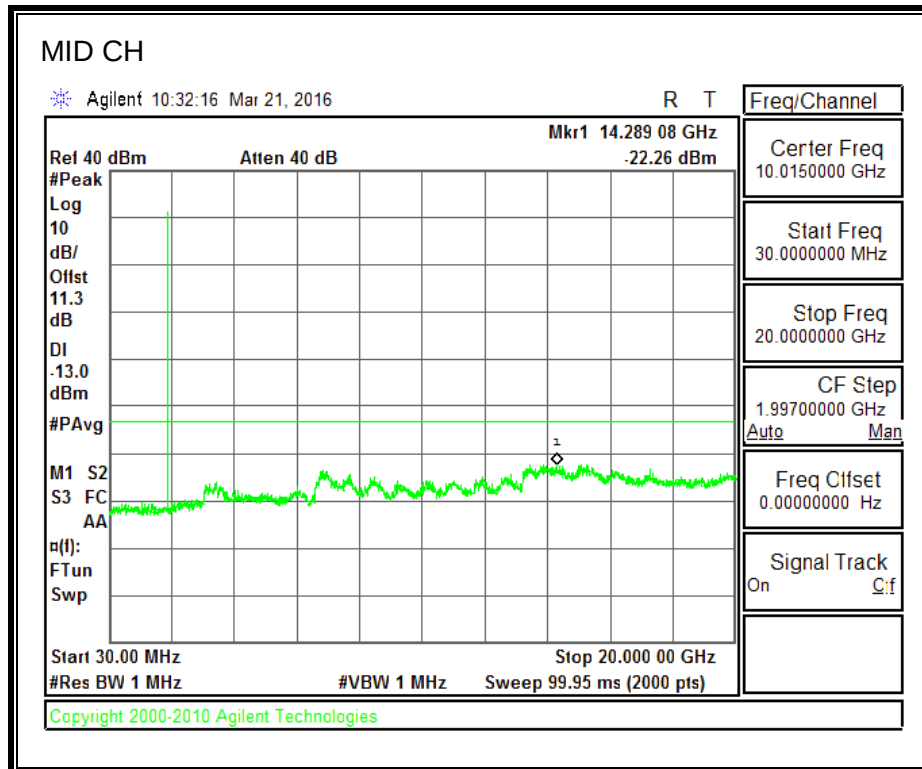



8.3.2. GSM-EGPRS


850MHz BAND

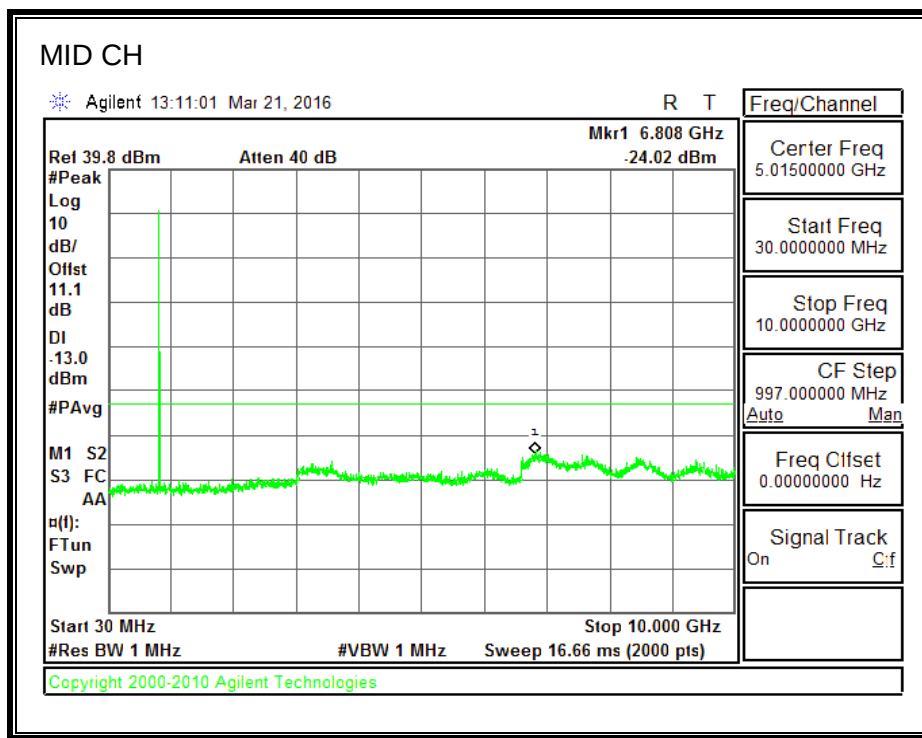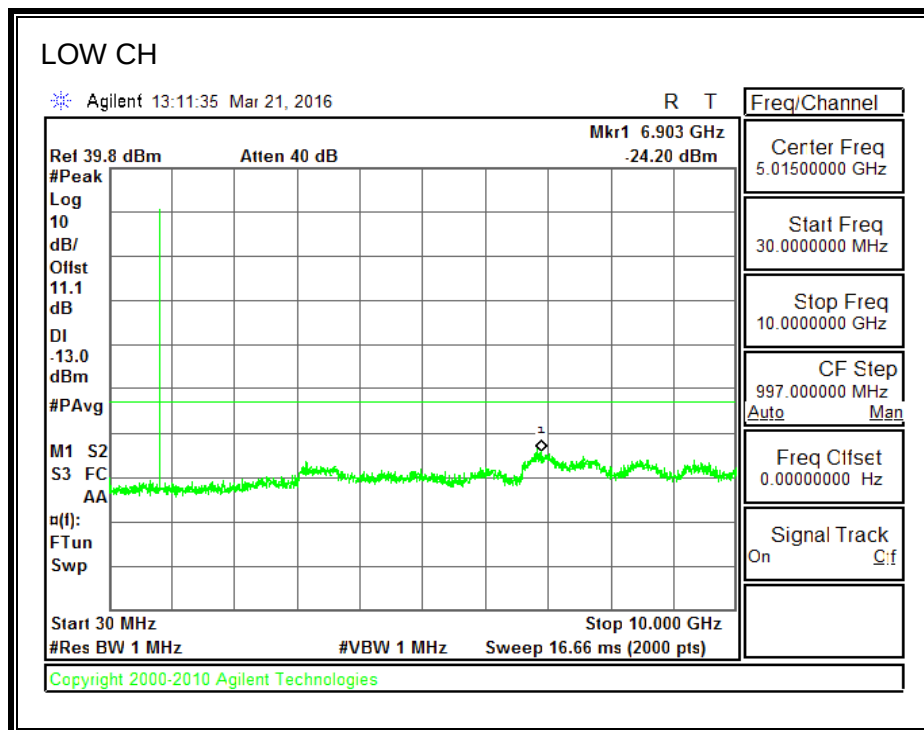

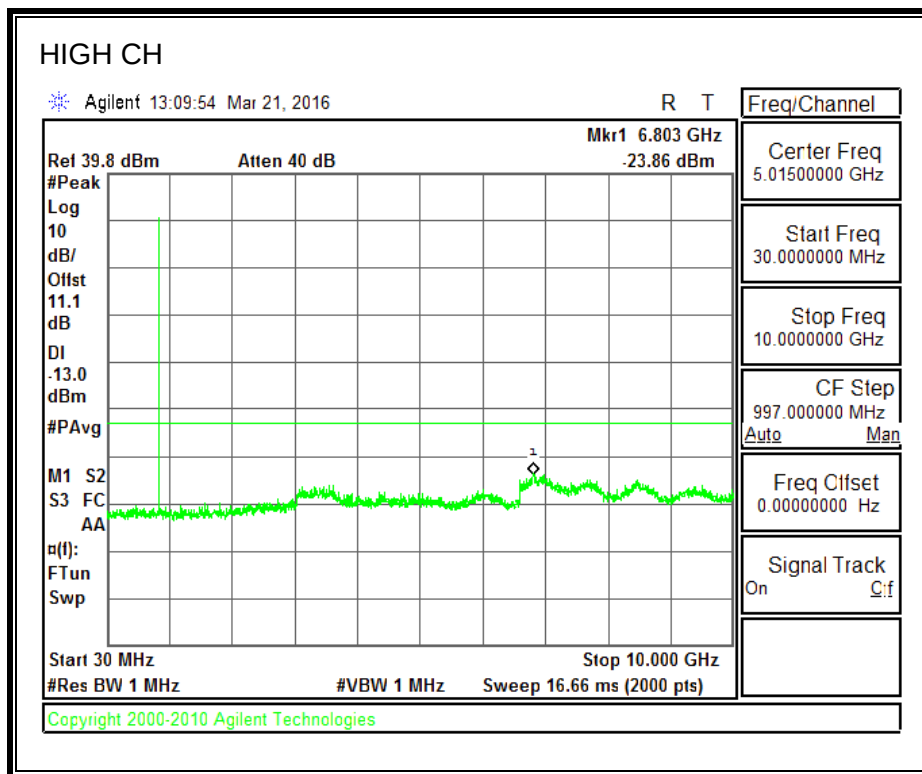



1900MHz BAND

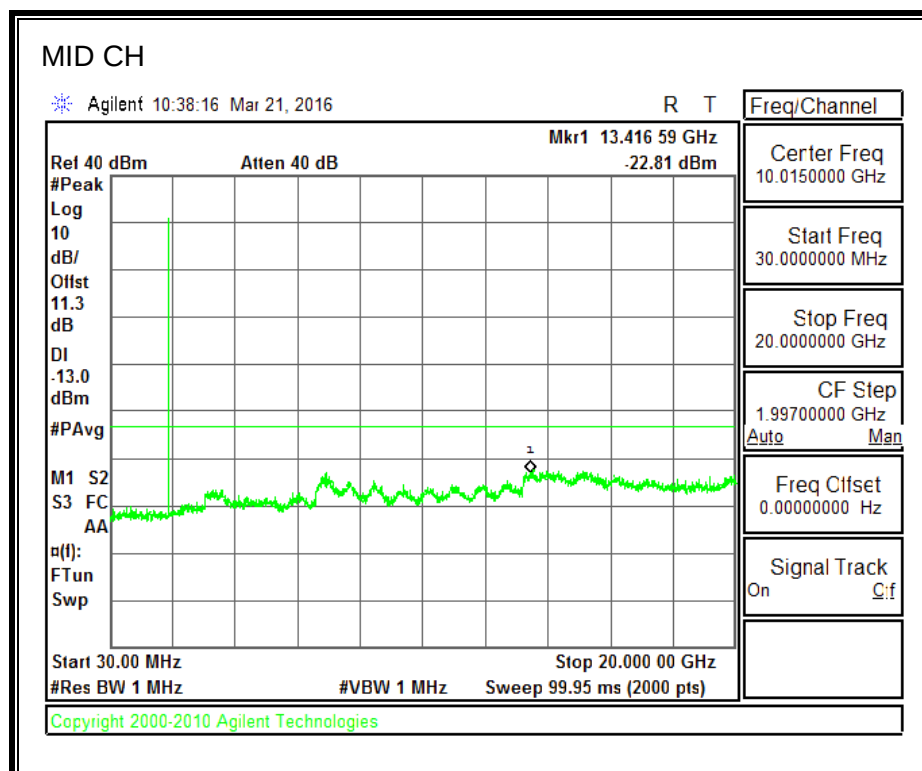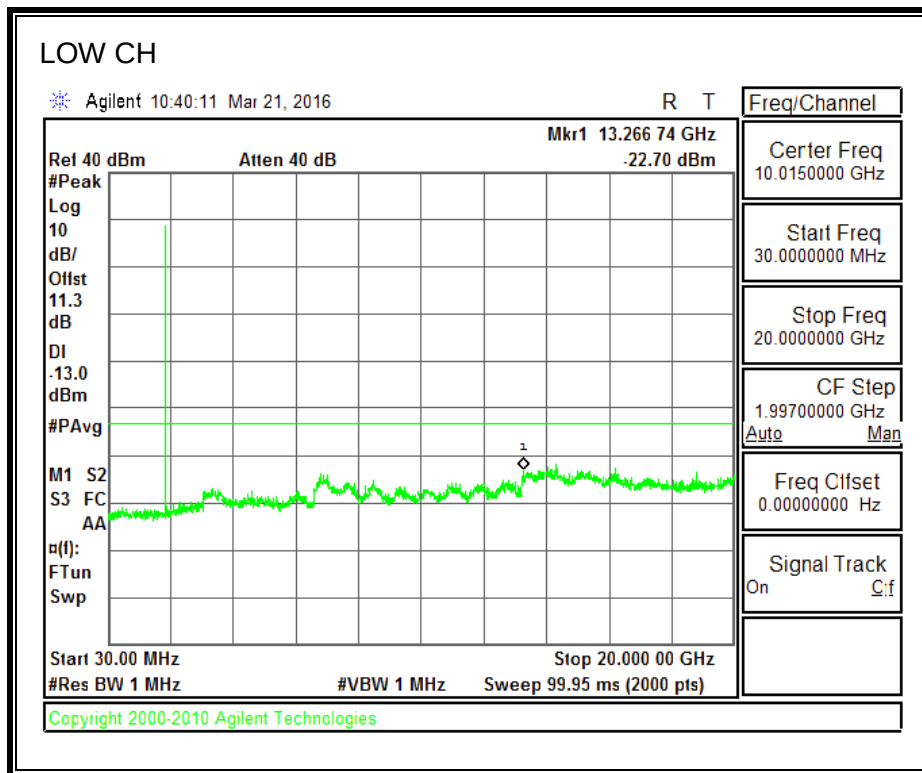


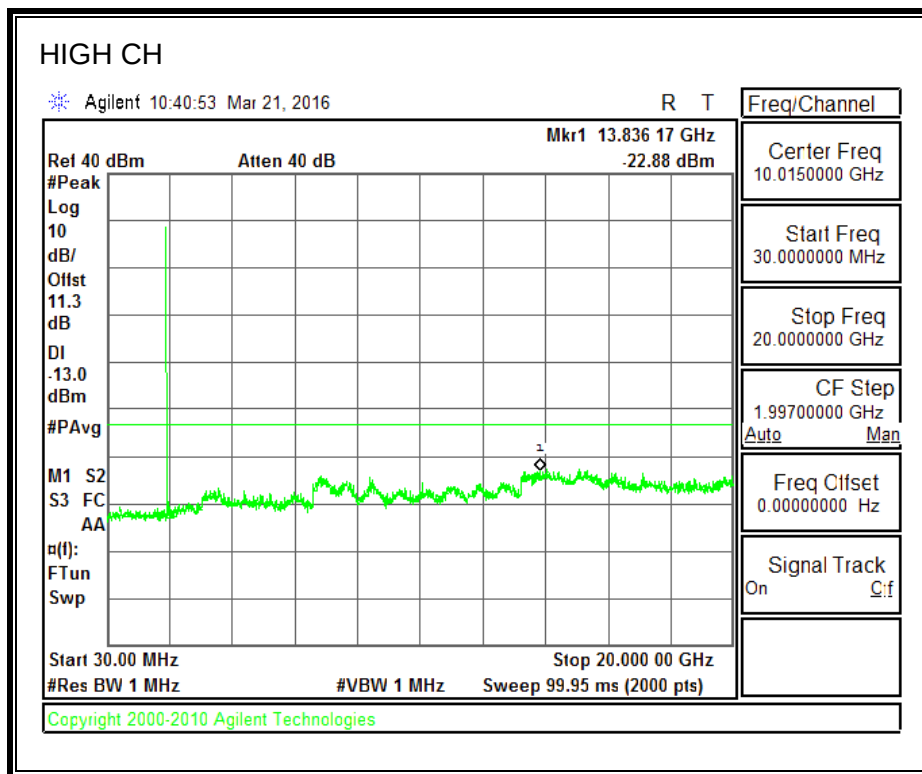



8.3.3. CDMA2000 1xRTT


850MHz BAND

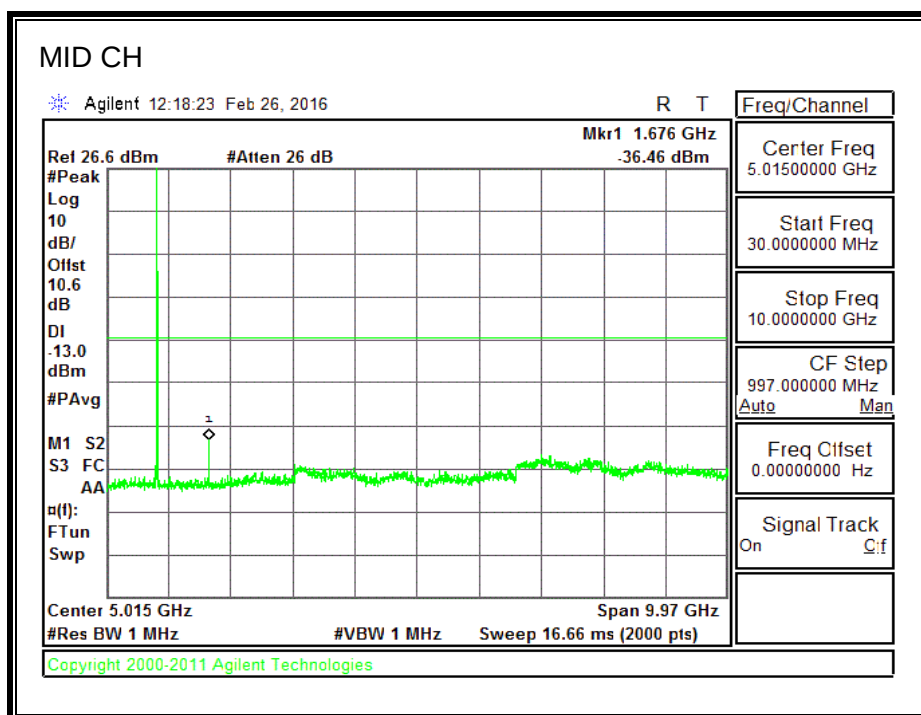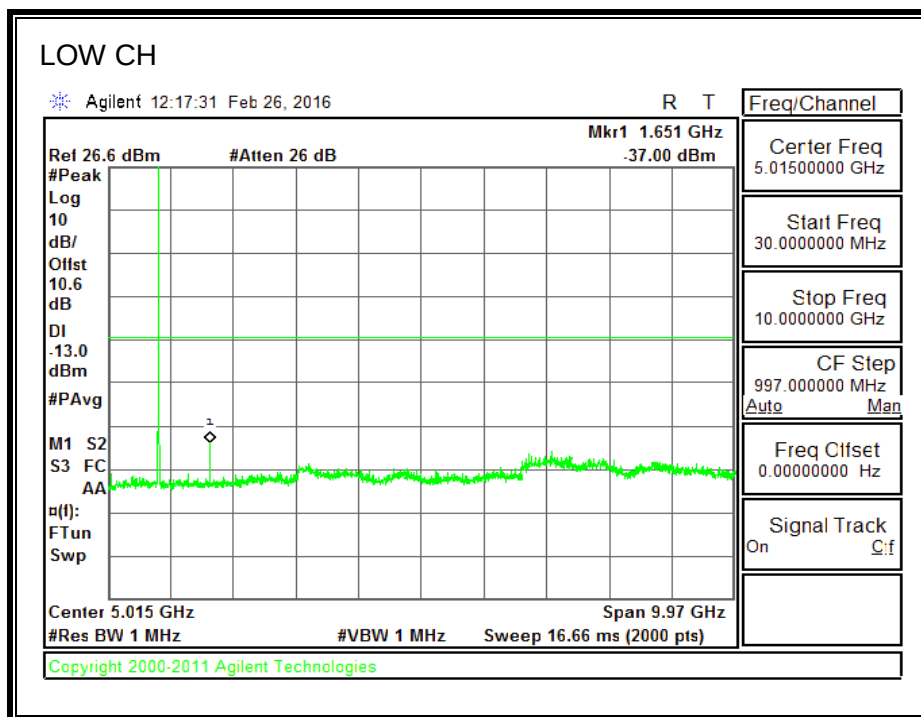


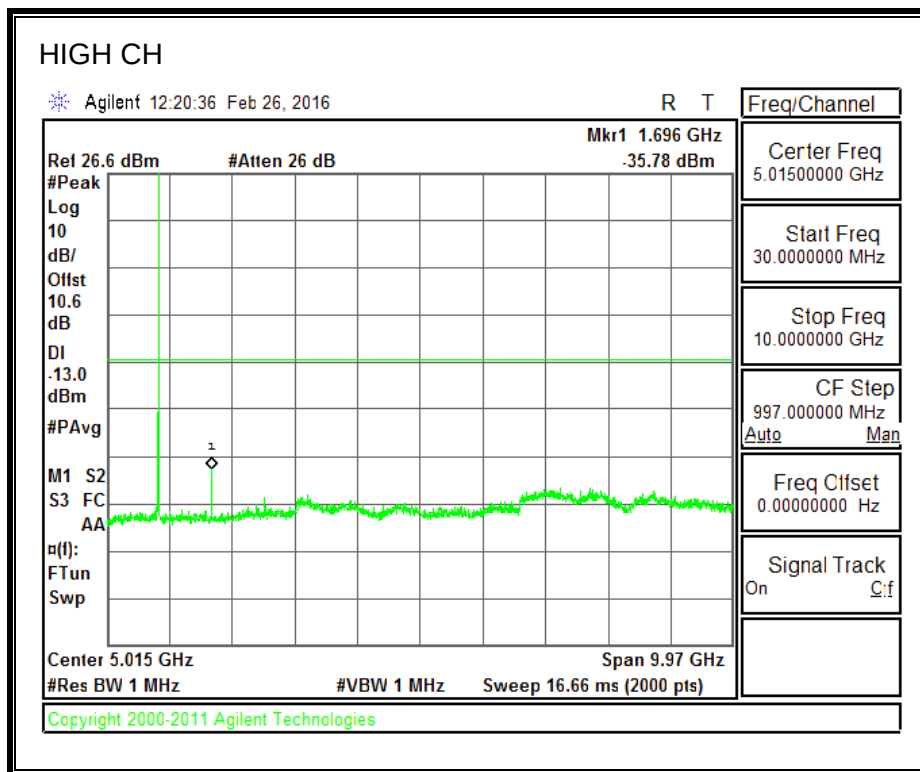



1900MHz BAND

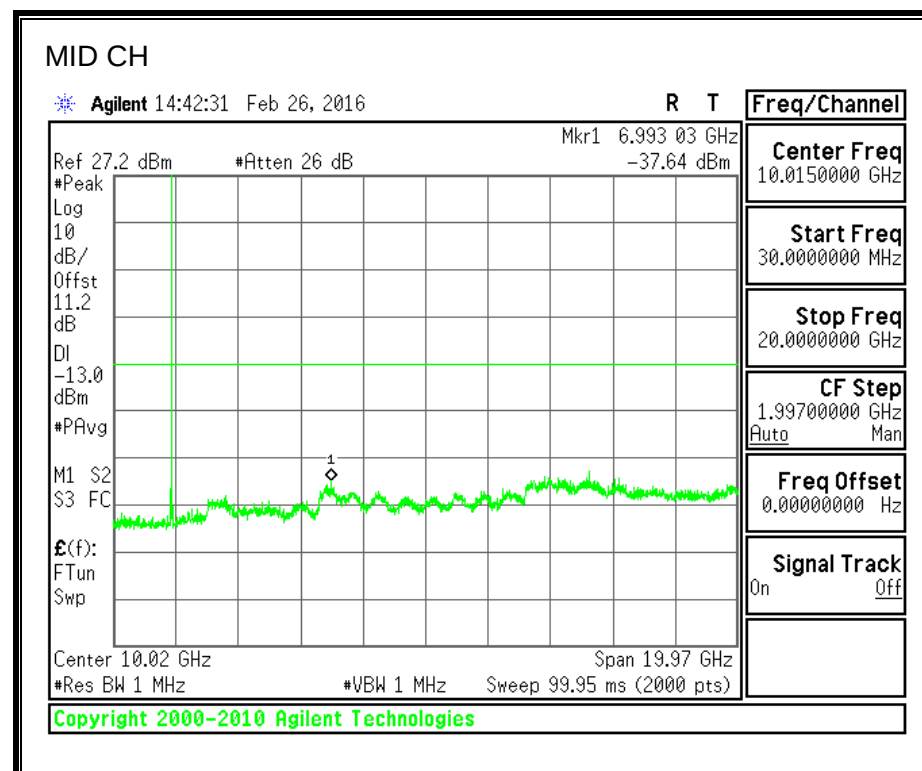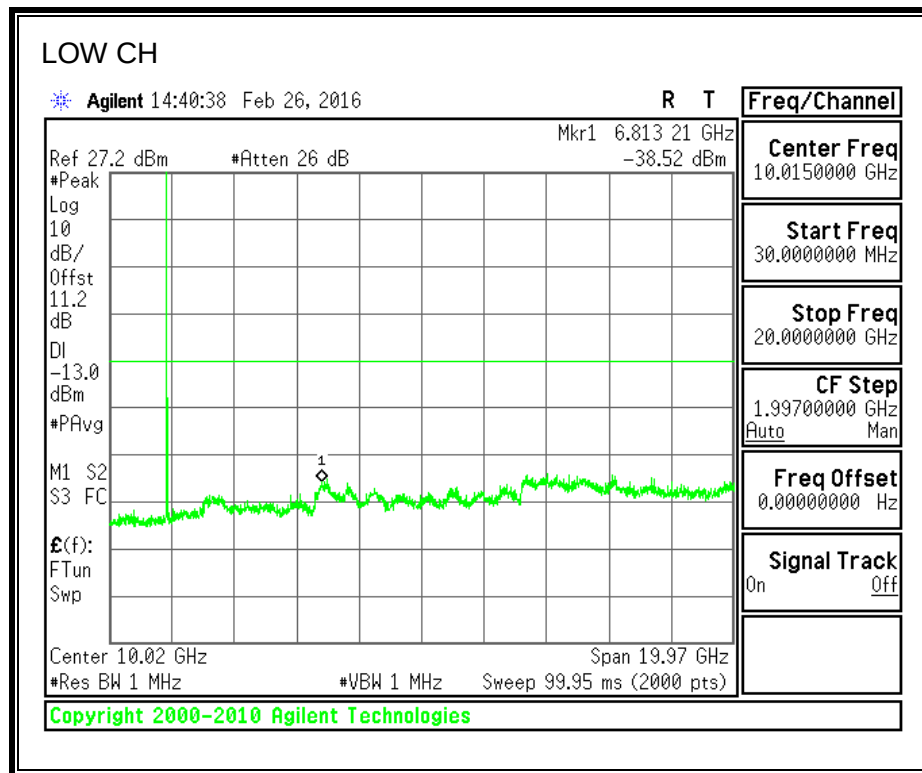

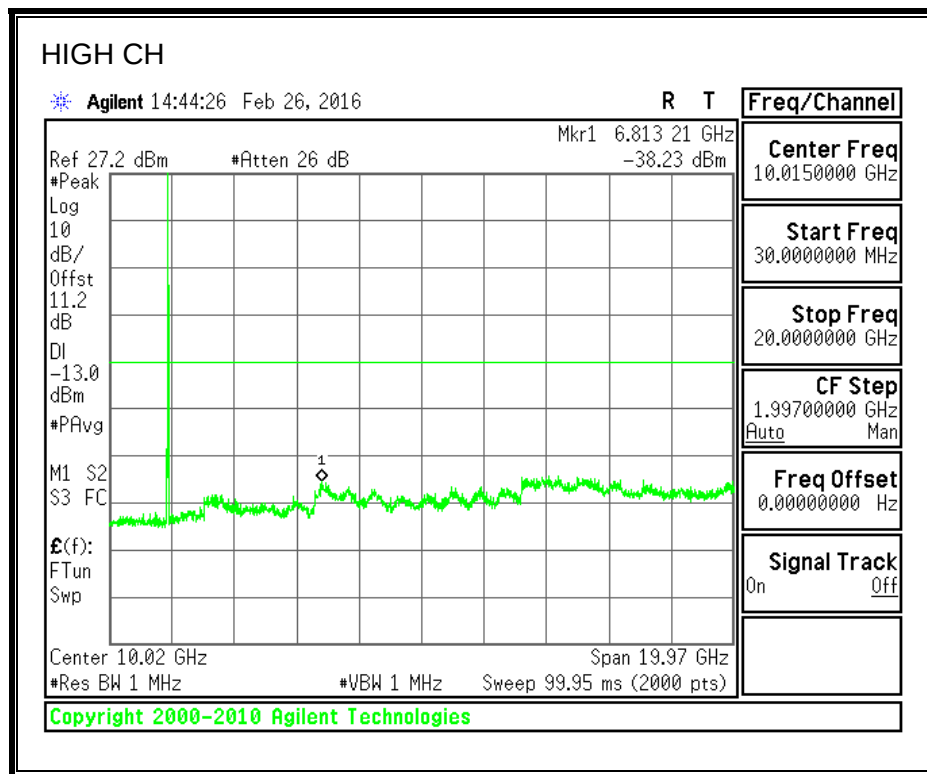



800MHz SECONDARY BAND

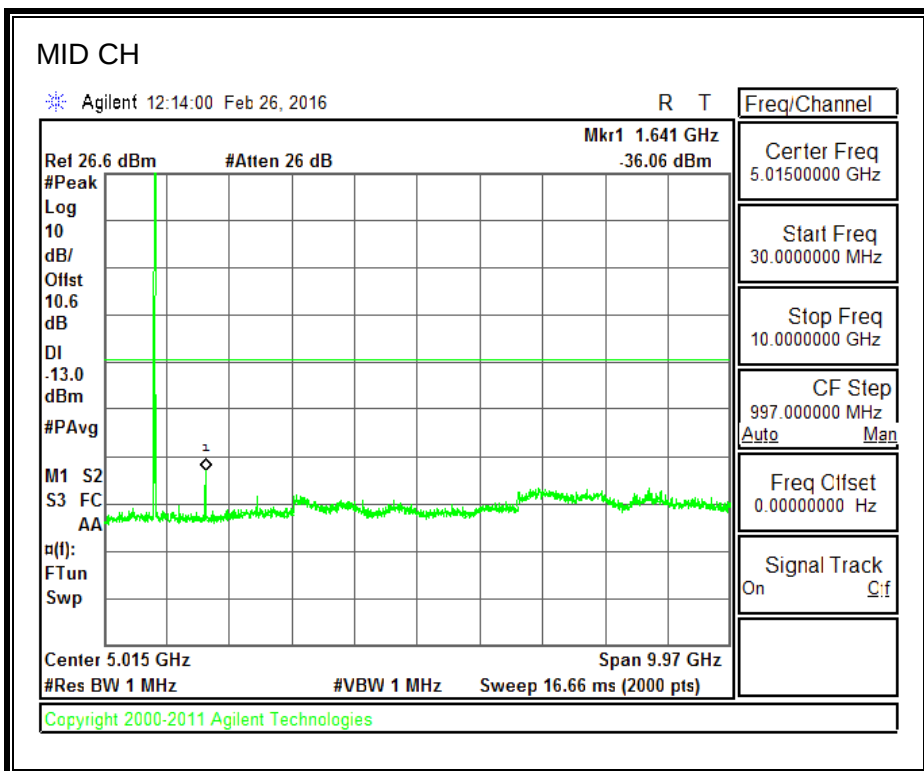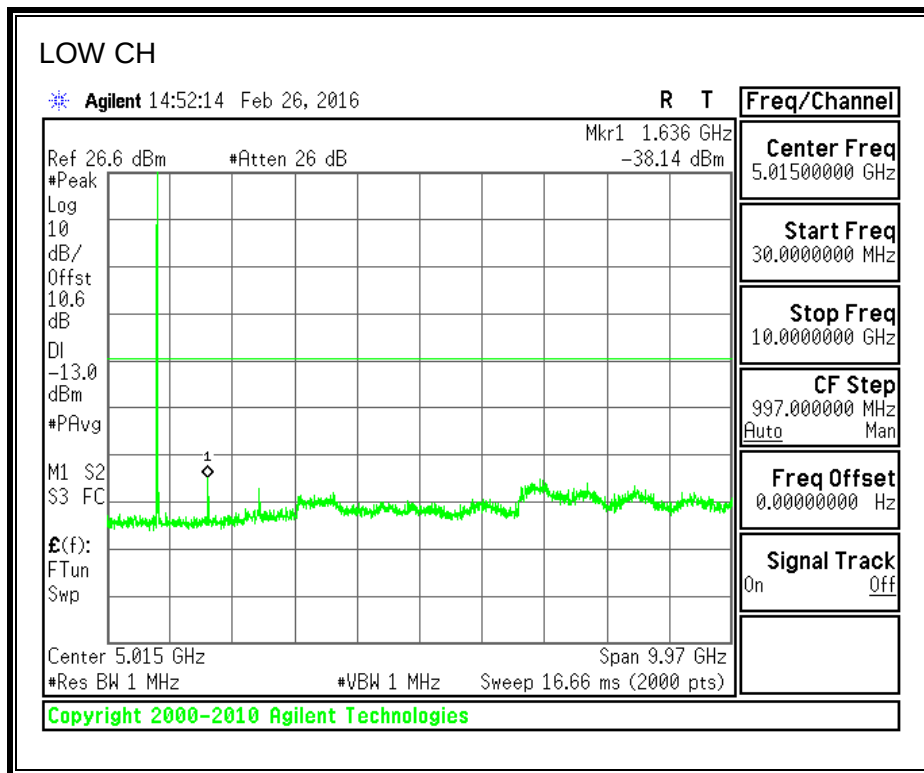


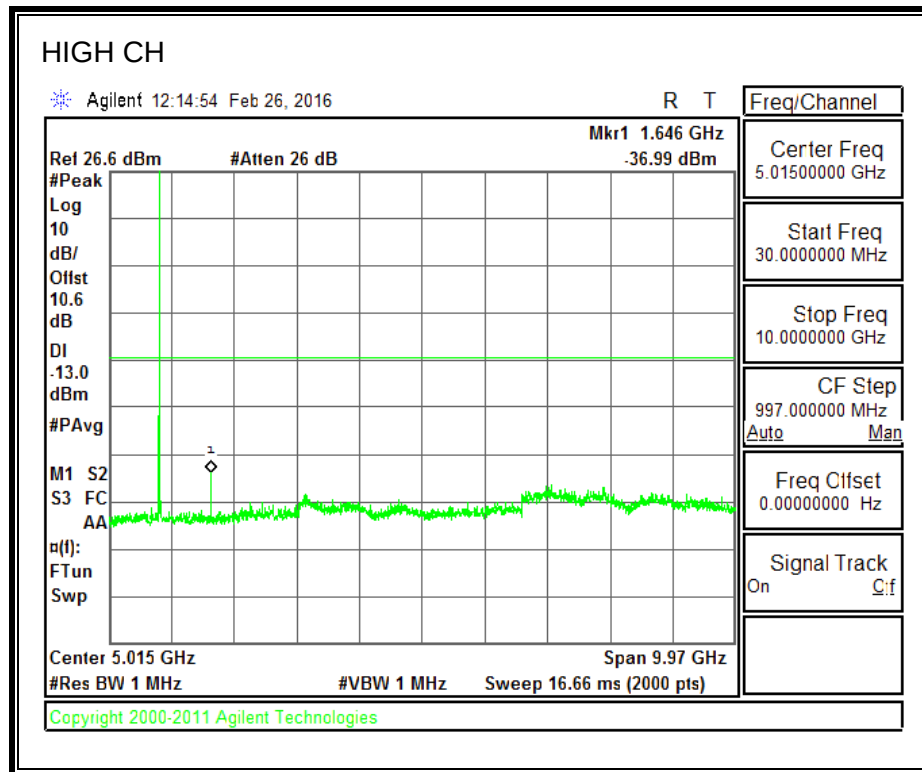



8.3.4. CDMA2000 EVDO REV A


850MHz BAND

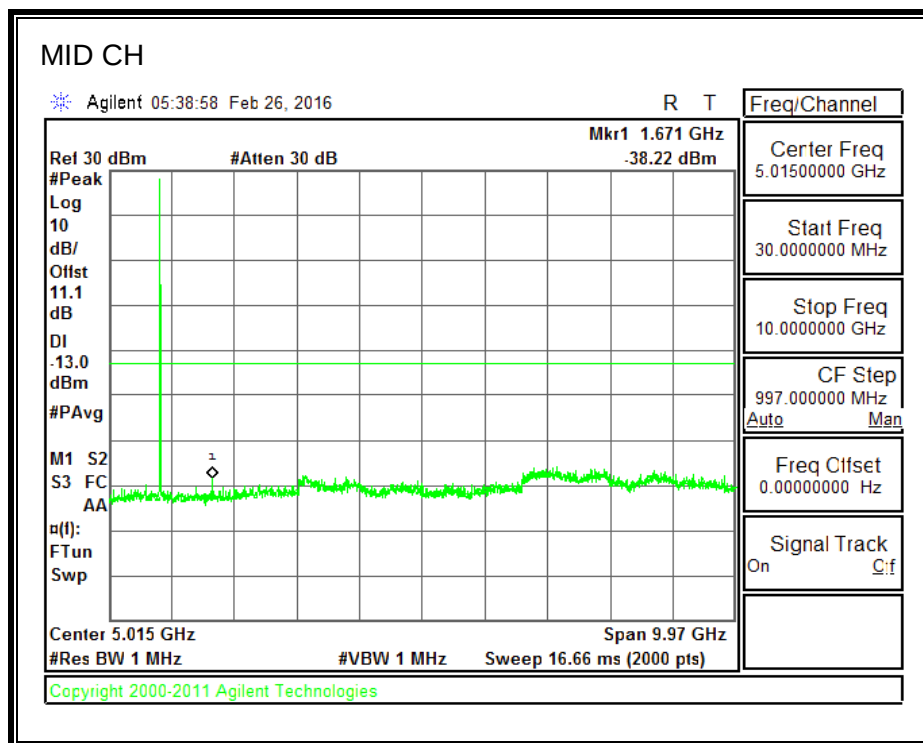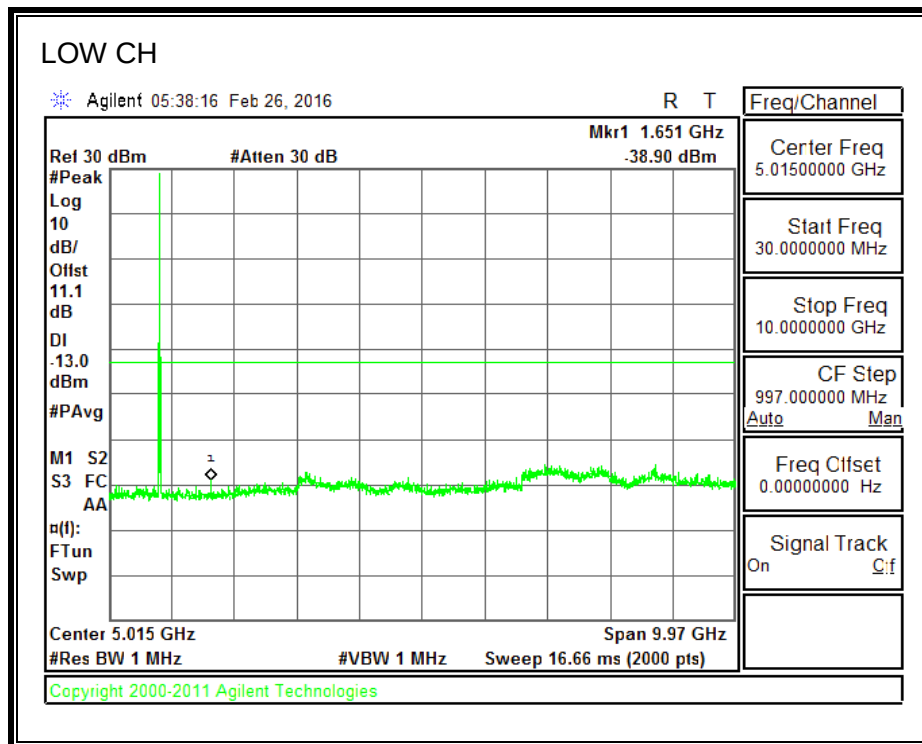


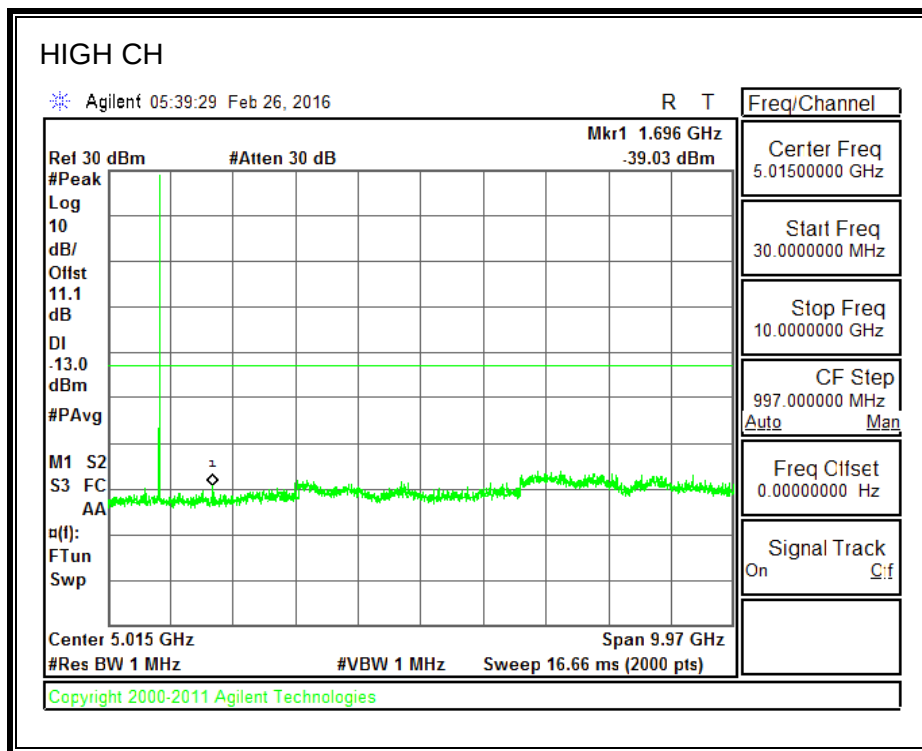



1900MHz BAND

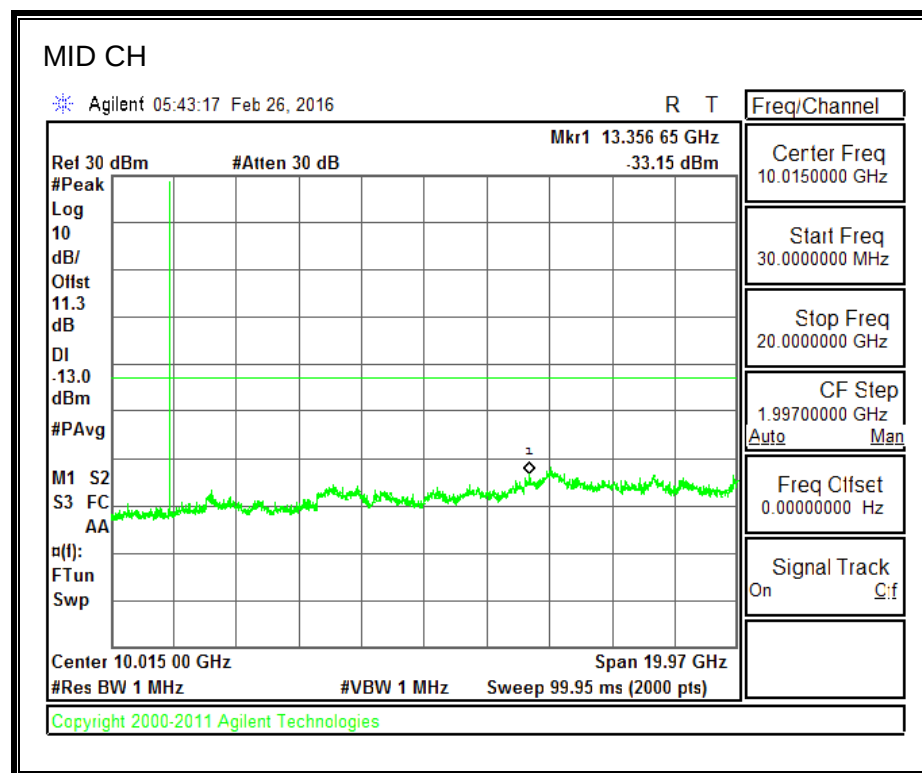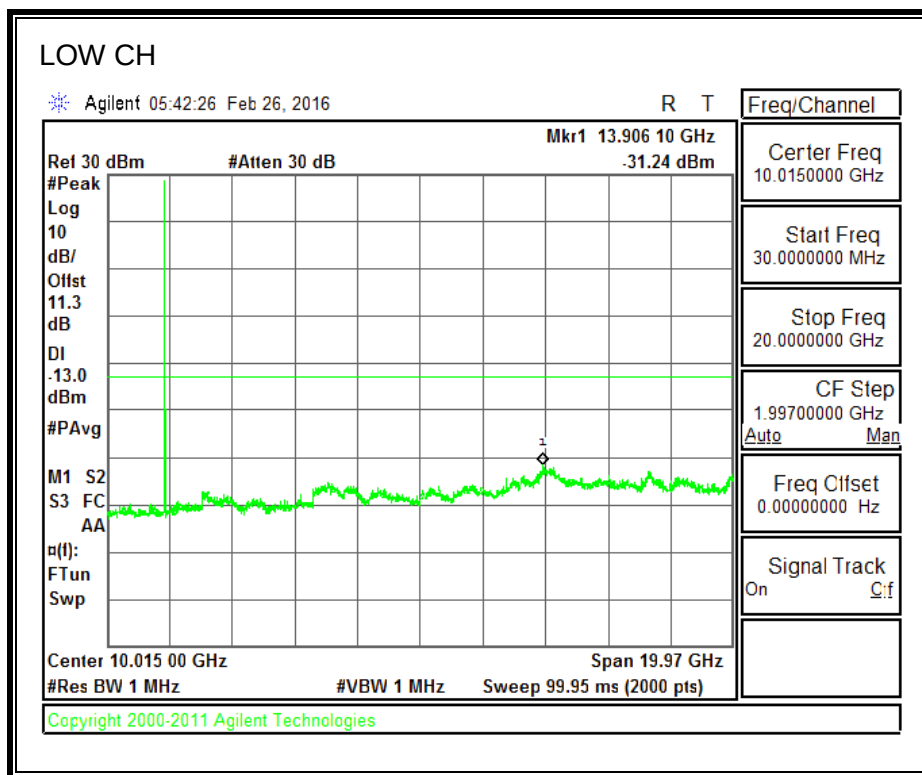

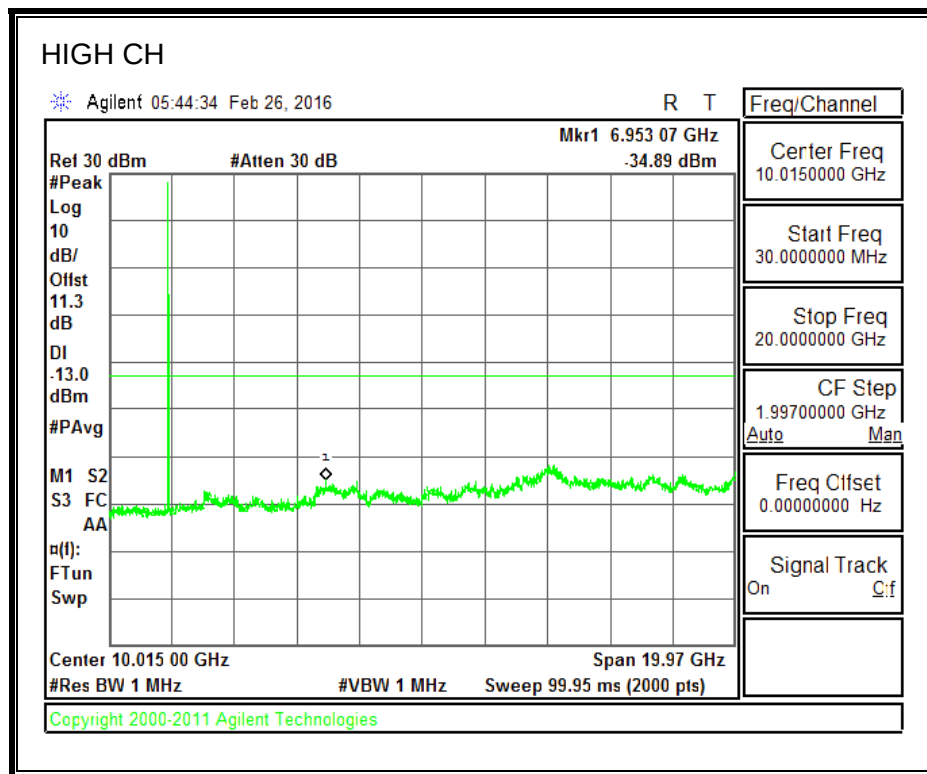



800MHz SECONDARY BAND

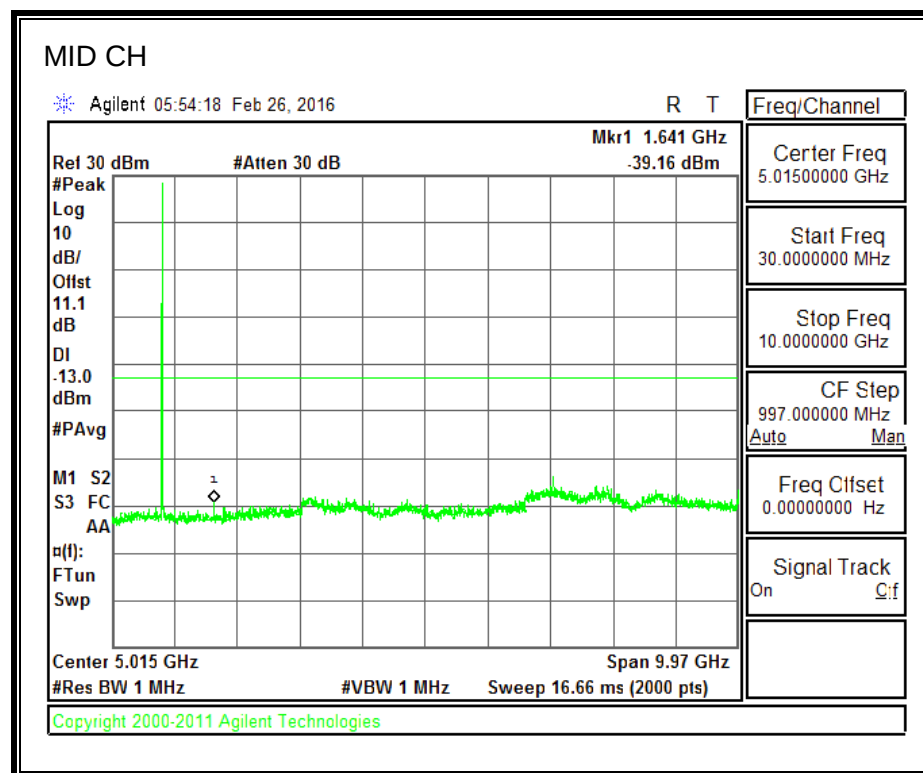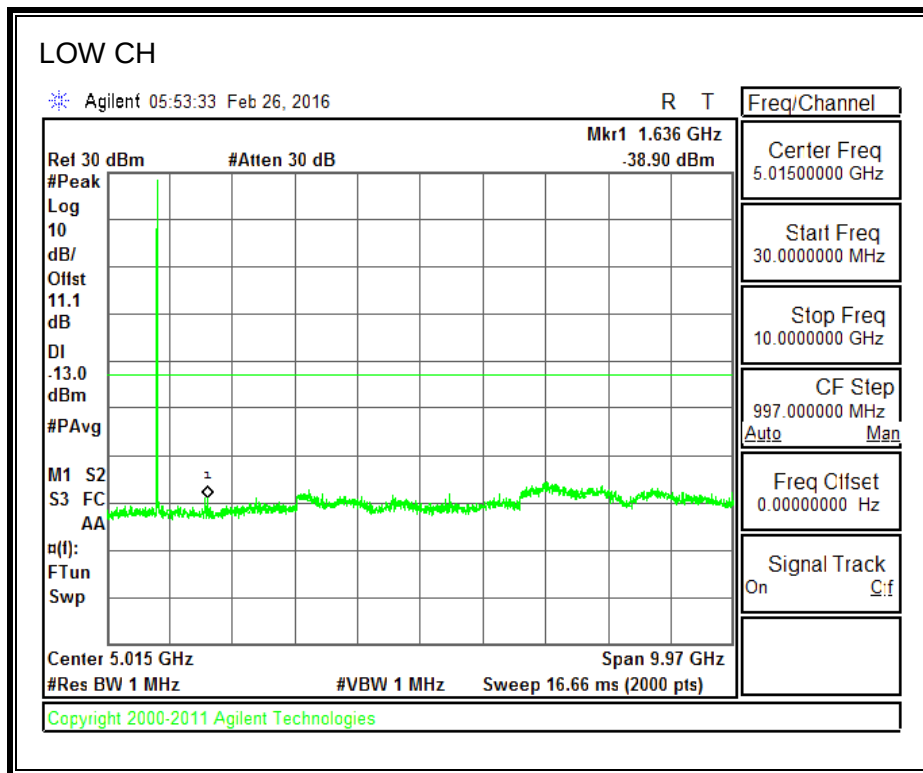


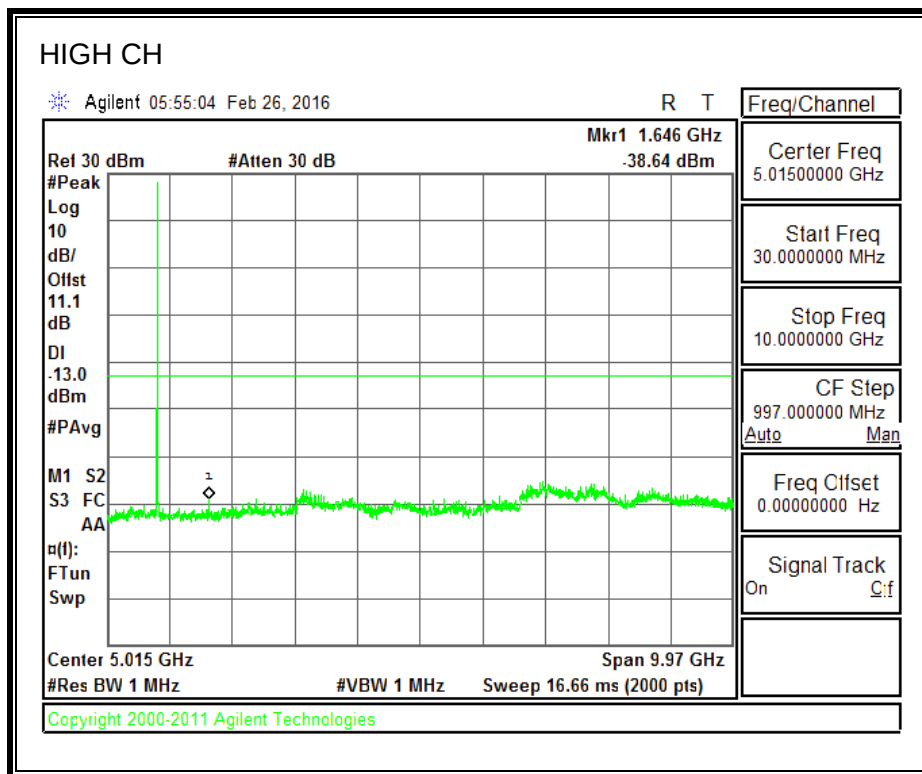



8.3.5. UMTS REL 99


850MHz BAND

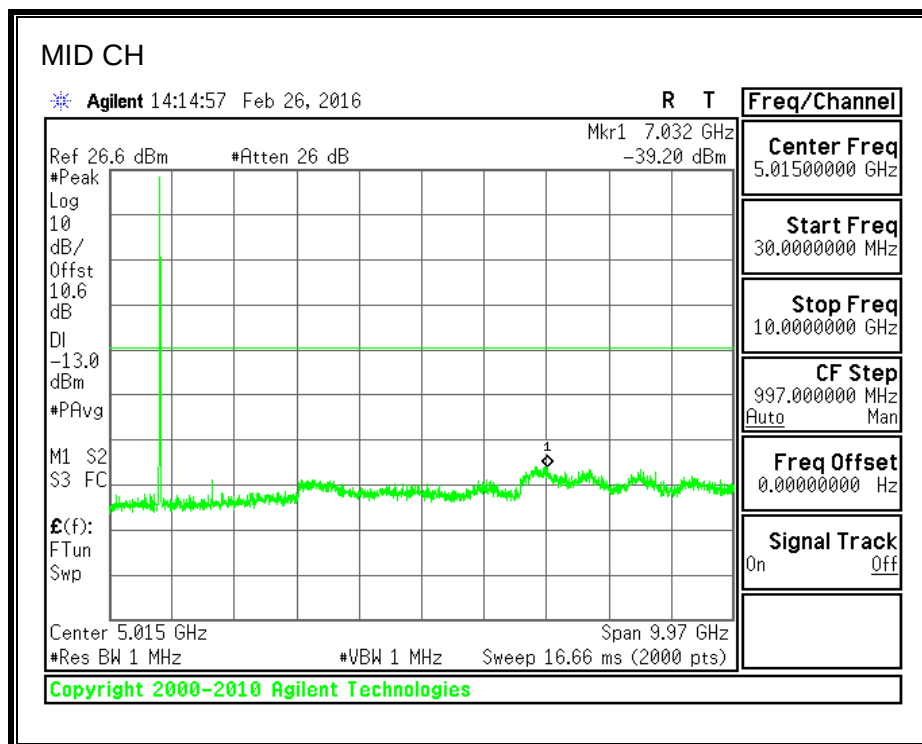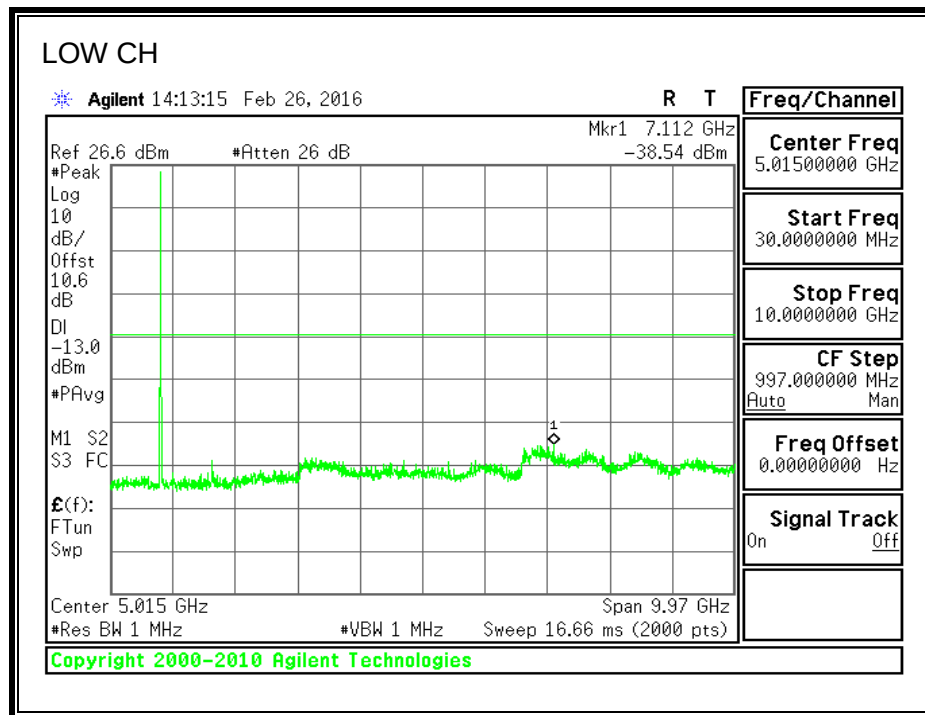


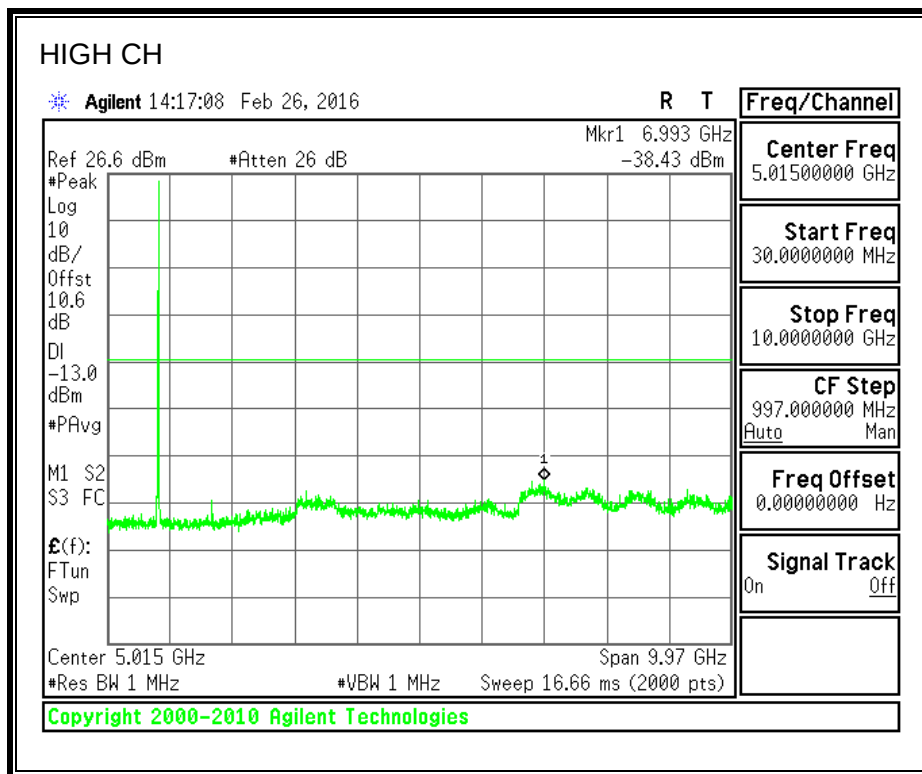



1900MHz BAND

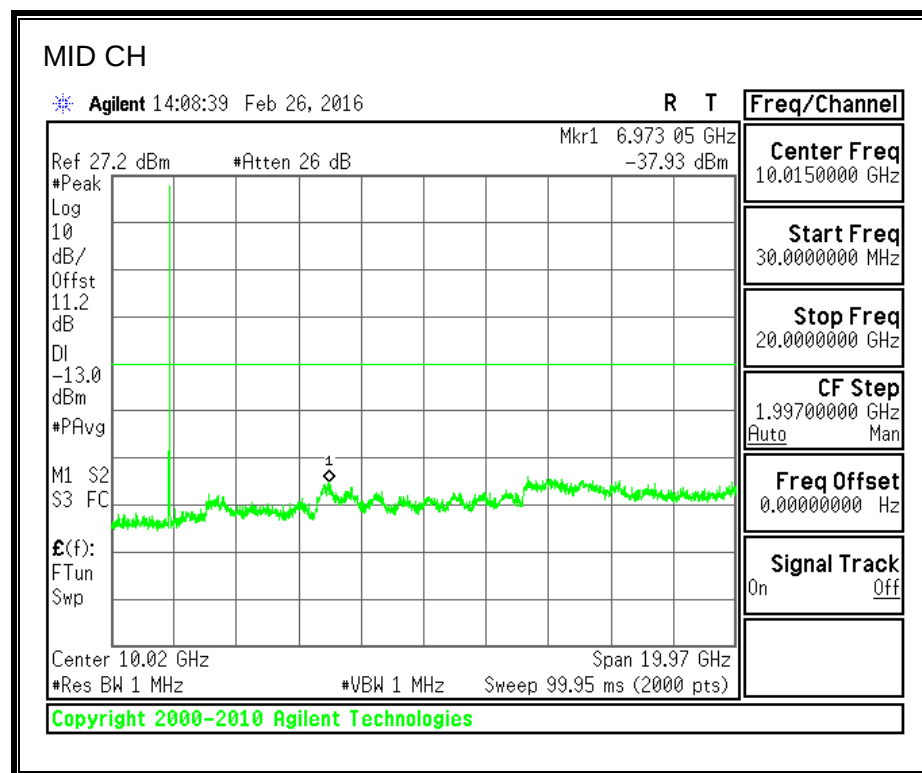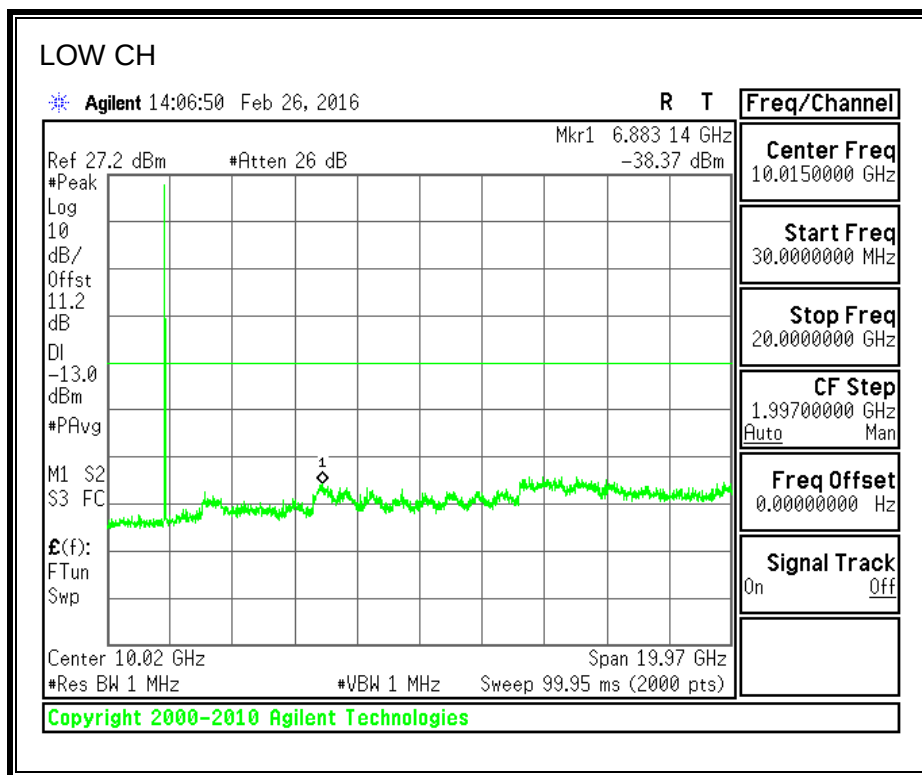

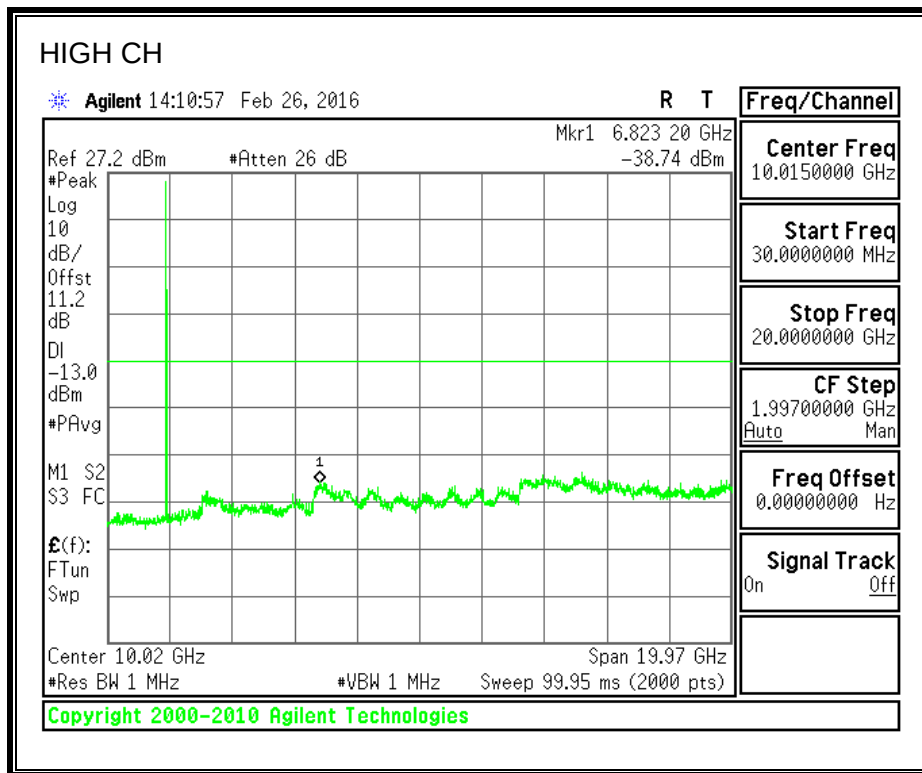



1700MHz BAND

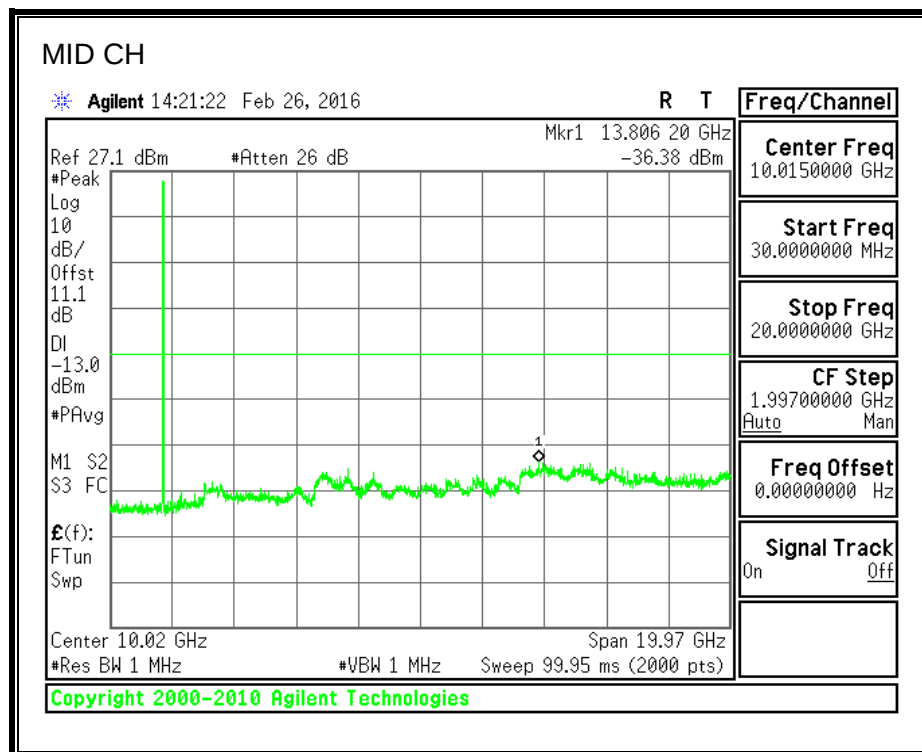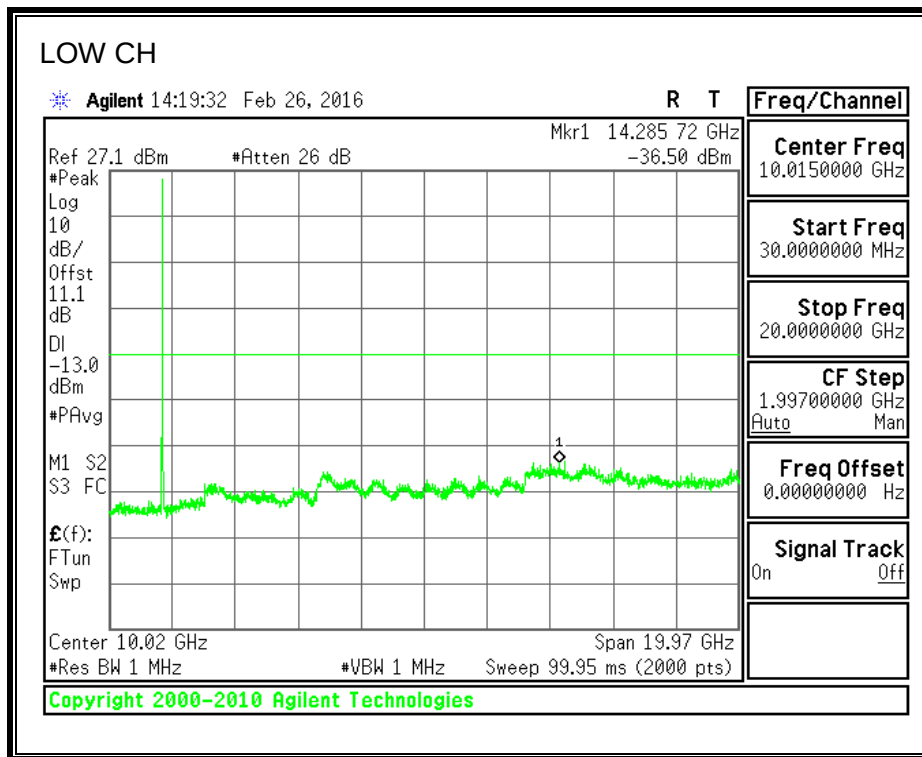


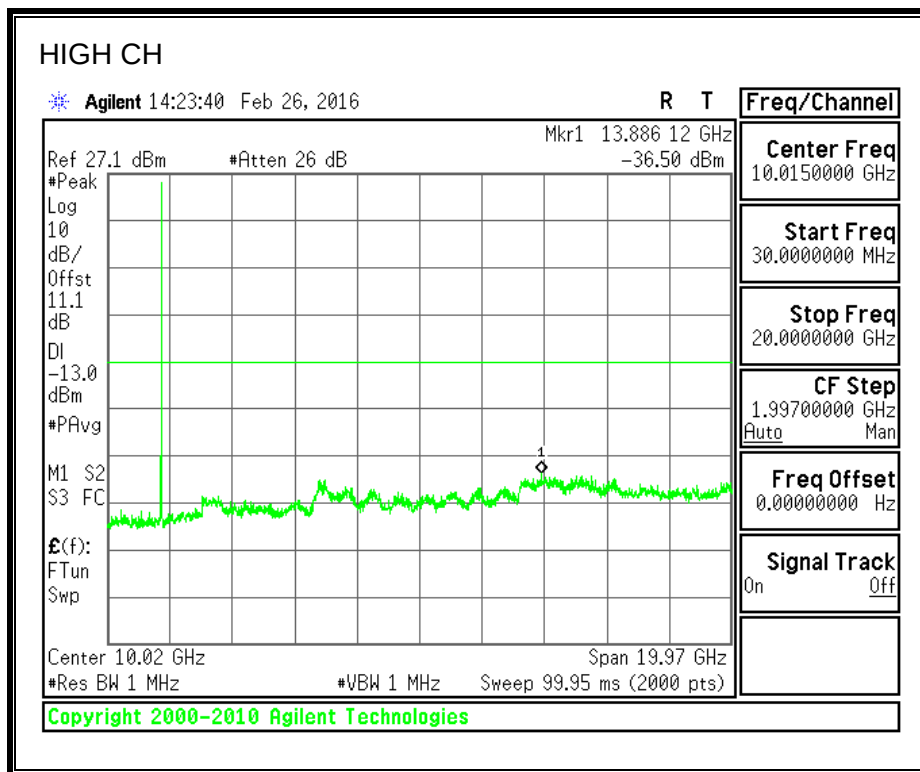



8.3.6. UMTS HSDPA


850MHz BAND

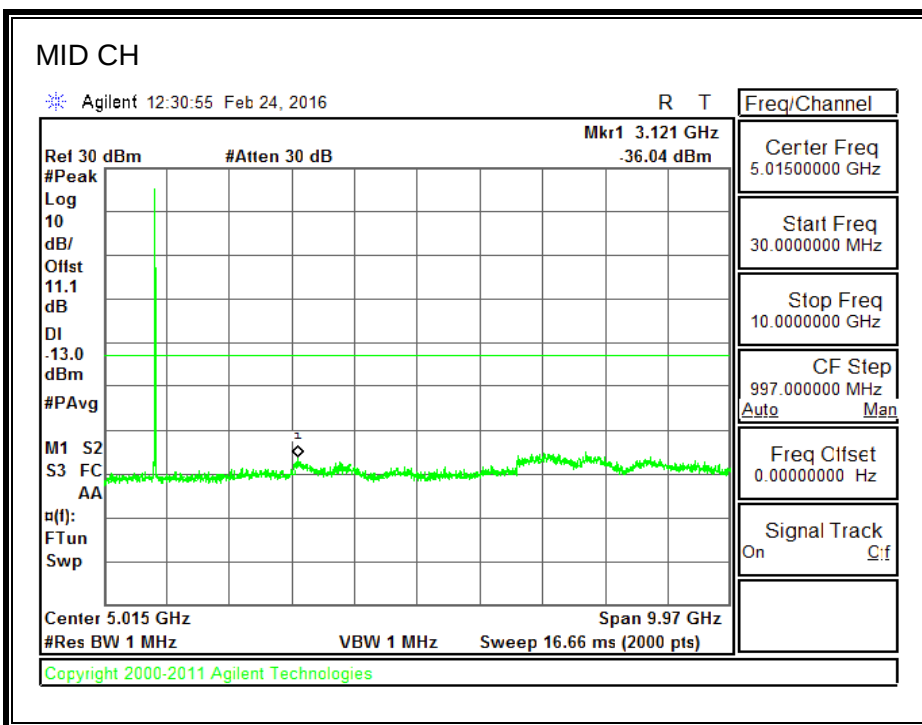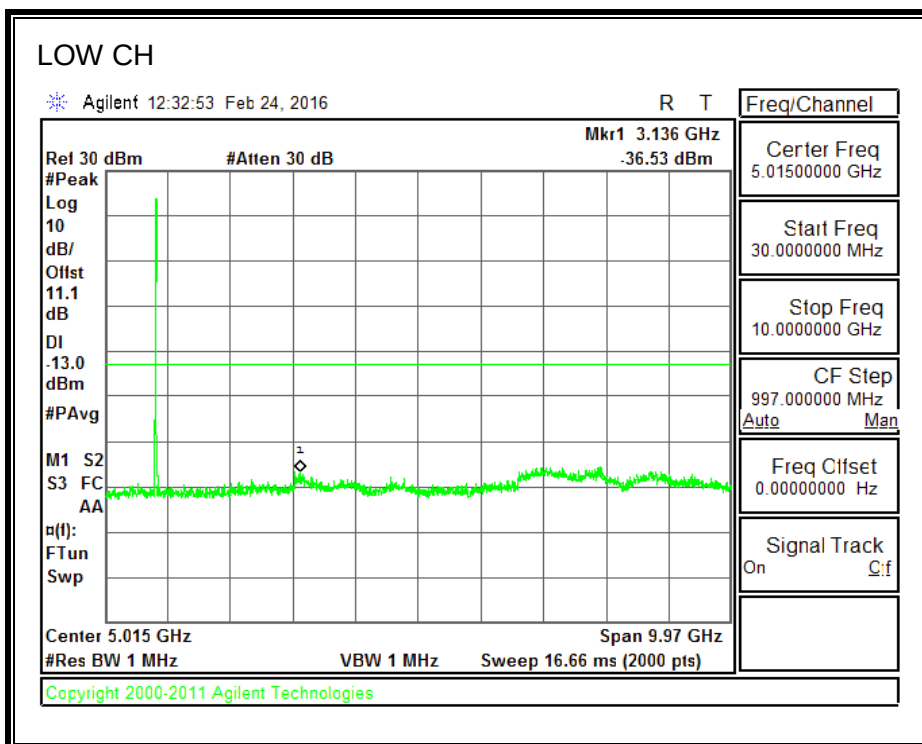


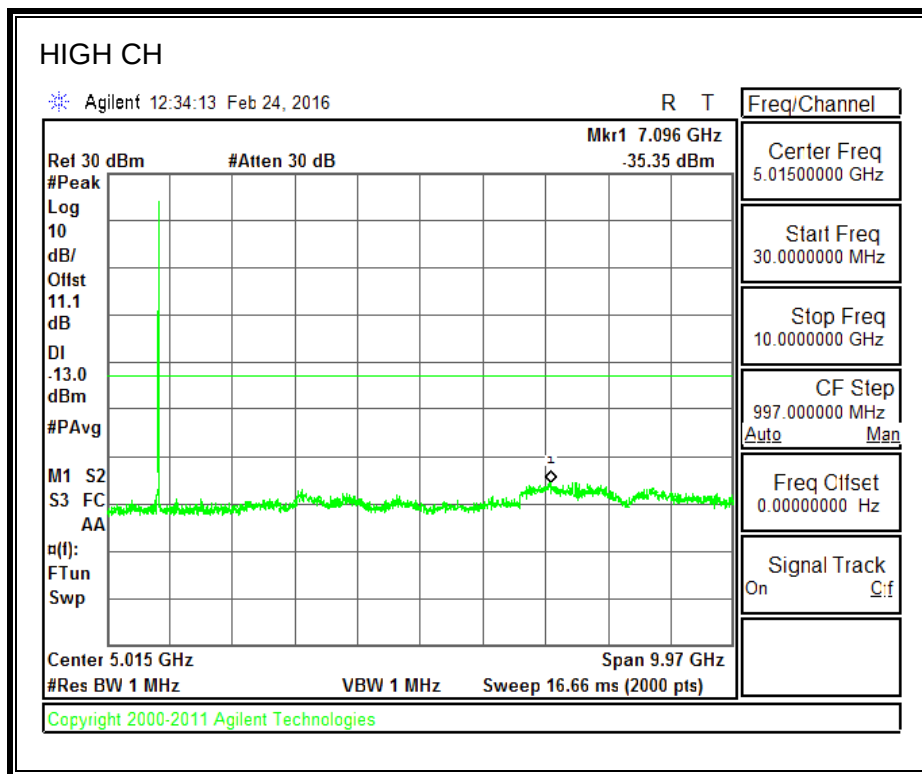



1900MHz BAND

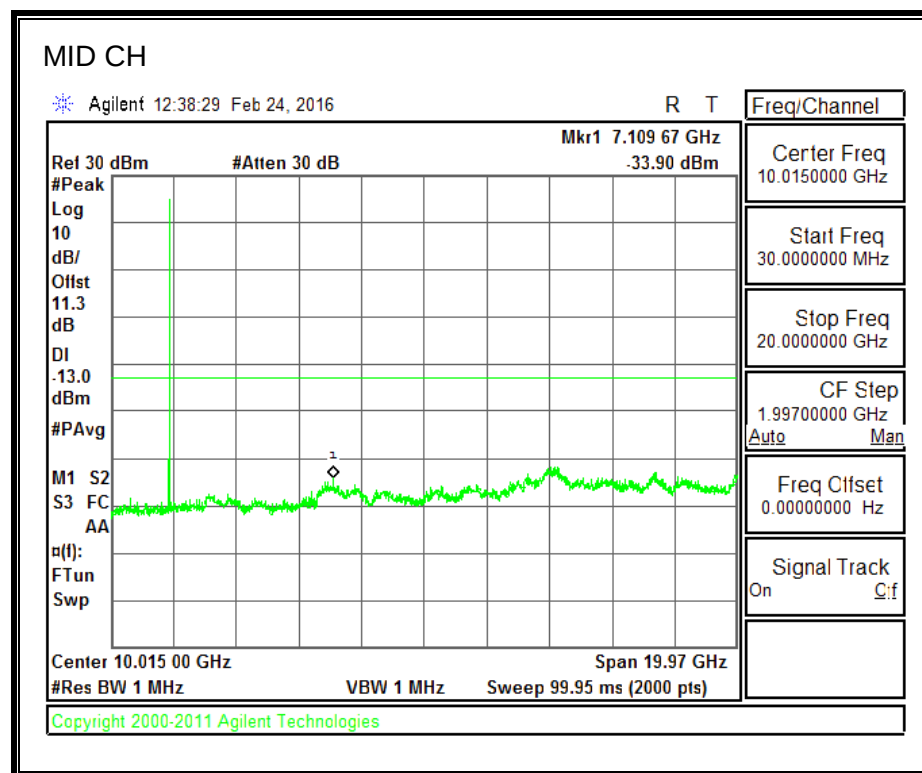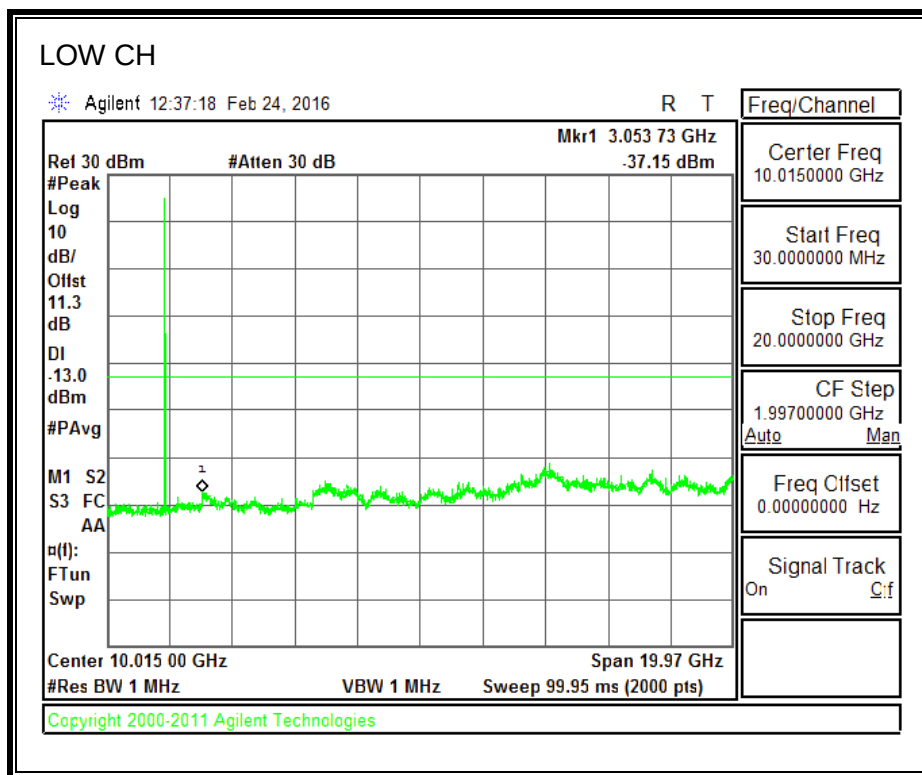

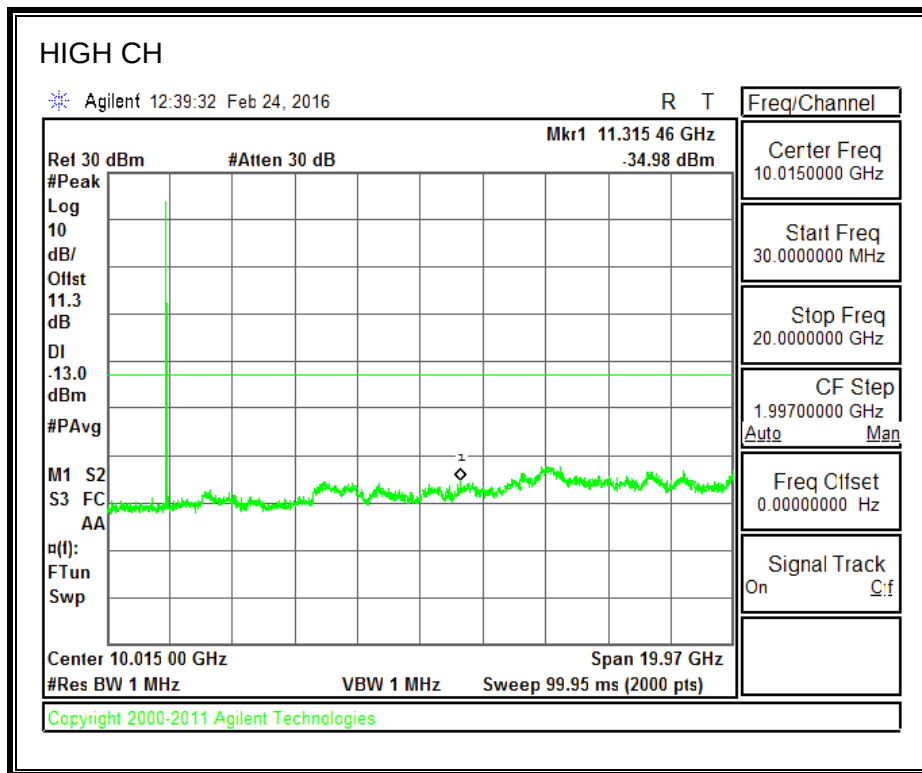

1700MHz BAND

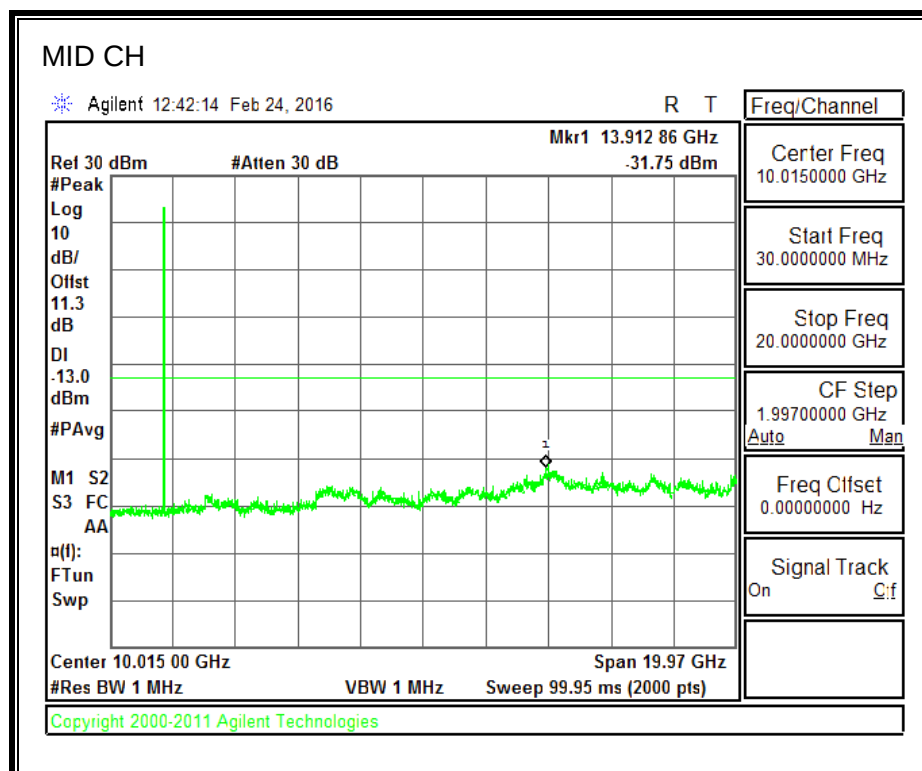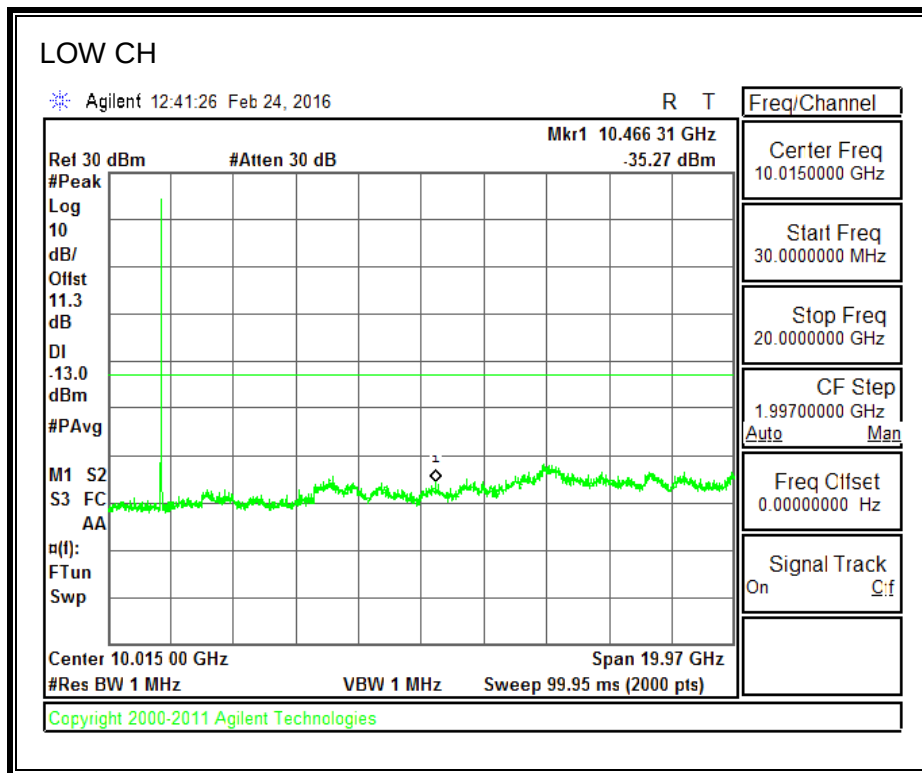

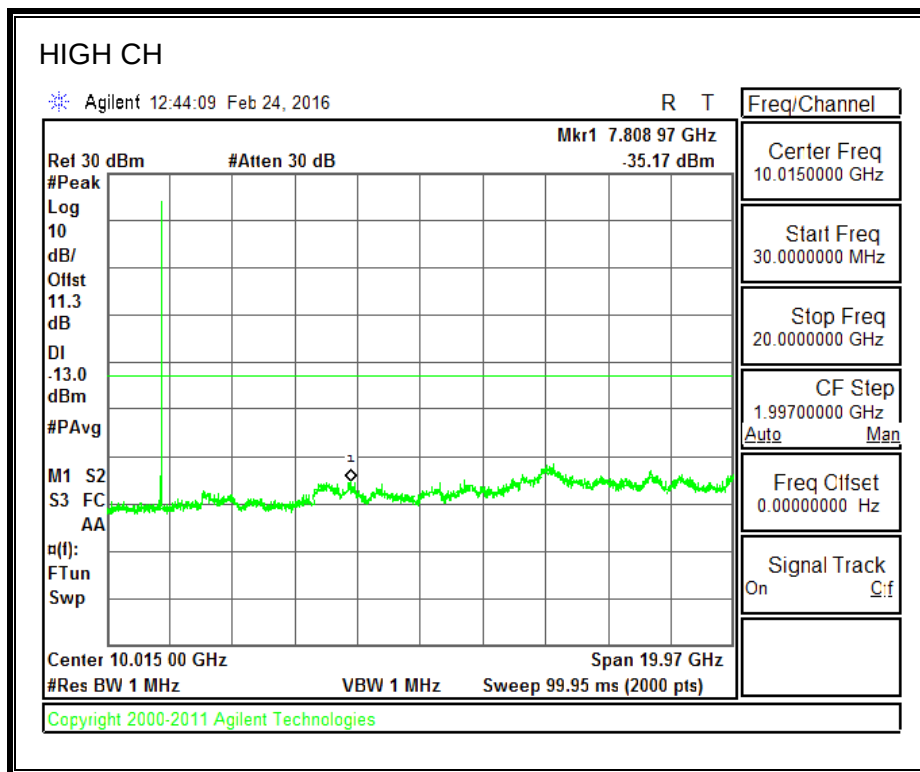

9. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213

LIMITS

§22.355

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 & §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§90.213

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

RESULTS

See the following pages.

9.1. GSM

ID:	39472	Date:	2/25/16
-----	-------	-------	---------

GPRS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0004	848.9996		
Extreme (50C)		824.0005	848.9996	72.0	0.09
Extreme (40C)		824.0004	848.9996	47.5	0.06
Extreme (30C)		824.0005	848.9996	59.3	0.07
Extreme (10C)		824.0004	848.9996	32.7	0.04
Extreme (0C)		824.0004	848.9995	-43.6	-0.05
Extreme (-10C)		824.0004	848.9996	38.5	0.05
Extreme (-20C)		824.0004	848.9996	39.7	0.05
Extreme (-30C)		824.0004	848.9996	46.8	0.06
25C	10%	824.0004	848.9996	46.7	0.06
	-10%	824.0004	848.9996	32.5	0.04
	End Point	824.0004	848.9996	30.3	0.04

EGPRS 850

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0229	848.9826		
Extreme (50C)		824.0230	848.9827	43.7	0.05
Extreme (40C)		824.0230	848.9827	44.1	0.05
Extreme (30C)		824.0230	848.9827	49.4	0.06
Extreme (10C)		824.0230	848.9827	34.1	0.04
Extreme (0C)		824.0230	848.9827	30.9	0.04
Extreme (-10C)		824.0230	848.9827	34.3	0.04
Extreme (-20C)		824.0230	848.9827	57.8	0.07
Extreme (-30C)		824.0230	848.9827	47.0	0.06
25C	10%	824.0230	848.9827	43.3	0.05
	-10%	824.0230	848.9827	46.1	0.06
	End Point	824.0230	848.9827	36.2	0.04

GPRS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0007	1909.9715		
Extreme (50C)		1850.0008	1909.9716	73.4	0.04
Extreme (40C)		1850.0008	1909.9716	84.3	0.04
Extreme (30C)		1850.0008	1909.9716	93.7	0.05
Extreme (10C)		1850.0008	1909.9716	84.2	0.04
Extreme (0C)		1850.0008	1909.9716	63.1	0.03
Extreme (-10C)		1850.0008	1909.9716	63.2	0.03
Extreme (-20C)		1850.0008	1909.9715	52.5	0.03
Extreme (-30C)		1850.0008	1909.9716	66.4	0.04
25C	10%	1850.0008	1909.9716	88.7	0.05
	-10%	1850.0008	1909.9716	67.0	0.04
	End Point	1850.0008	1909.9716	71.7	0.04

EGPRS 1900

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.0303	1909.9782		
Extreme (50C)		1850.0304	1909.9783	68.3	0.04
Extreme (40C)		1850.0304	1909.9783	89.7	0.05
Extreme (30C)		1850.0304	1909.9783	85.8	0.05
Extreme (10C)		1850.0304	1909.9783	79.0	0.04
Extreme (0C)		1850.0304	1909.9782	51.2	0.03
Extreme (-10C)		1850.0304	1909.9783	57.2	0.03
Extreme (-20C)		1850.0304	1909.9782	47.1	0.03
Extreme (-30C)		1850.0304	1909.9783	62.2	0.03
25C	10%	1850.0304	1909.9783	83.4	0.04
	-10%	1850.0304	1909.9783	85.2	0.05
	End Point	1850.0304	1909.9783	78.6	0.04

9.2. CDMA2000

ID:	39472	Date:	2/25/16
-----	-------	-------	---------

CDMA 1xRTT BC0

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.0031	849.0088		
Extreme (50C)		824.0031	849.0089	29.1	0.03
Extreme (40C)		824.0031	849.0089	22.6	0.03
Extreme (30C)		824.0031	849.0089	26.2	0.03
Extreme (10C)		824.0031	849.0089	22.5	0.03
Extreme (0C)		824.0031	849.0089	28.9	0.03
Extreme (-10C)		824.0031	849.0089	27.3	0.03
Extreme (-20C)		824.0031	849.0089	27.2	0.03
Extreme (-30C)		824.0031	849.0089	29.0	0.03
25C	10%	824.0032	849.0089	32.8	0.04
	-10%	824.0031	849.0089	26.5	0.03
	End Point	824.0031	849.0089	27.7	0.03

CDMA 1x RTT BC1

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.5557	1909.4485		
Extreme (50C)		1850.5557	1909.4485	33.8	0.02
Extreme (40C)		1850.5557	1909.4485	29.3	0.02
Extreme (30C)		1850.5557	1909.4485	29.4	0.02
Extreme (10C)		1850.5557	1909.4485	27.2	0.01
Extreme (0C)		1850.5557	1909.4485	26.6	0.01
Extreme (-10C)		1850.5557	1909.4485	30.6	0.02
Extreme (-20C)		1850.5557	1909.4485	34.7	0.02
Extreme (-30C)		1850.5557	1909.4485	29.1	0.02
25C	10%	1850.5557	1909.4485	33.5	0.02
	-10%	1850.5557	1909.4485	31.9	0.02
	End Point	1850.5557	1909.4485	31.6	0.02

CDMA 1xRTT BC10

Limit		816.35	823.65	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	816.5578	823.4481		
Extreme (50C)		816.5578	823.4481	21.1	0.03
Extreme (40C)		816.5578	823.4481	18.5	0.02
Extreme (30C)		816.5578	823.4481	21.7	0.03
Extreme (10C)		816.5578	823.4481	23.4	0.03
Extreme (0C)		816.5578	823.4481	22.0	0.03
Extreme (-10C)		816.5578	823.4481	17.6	0.02
Extreme (-20C)		816.5578	823.4481	19.3	0.02
Extreme (-30C)		816.5578	823.4481	18.9	0.02
25C	10%	816.5578	823.4481	17.3	0.02
	-10%	816.5578	823.4481	19.3	0.02
	End Point	816.5578	823.4481	19.9	0.02

9.3. UMTS

ID:	39472	Date:	2/25/16
-----	-------	-------	---------

UMTS REL99 BAND 5

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	824.1009	844.2975		
Extreme (50C)		824.1009	844.2975	16.2	0.02
Extreme (40C)		824.1009	844.2975	10.5	0.01
Extreme (30C)		824.1009	844.2975	12.1	0.01
Extreme (10C)		824.1009	844.2975	11.7	0.01
Extreme (0C)		824.1009	844.2975	12.6	0.02
Extreme (-10C)		824.1009	844.2975	14.8	0.02
Extreme (-20C)		824.1009	844.2975	15.1	0.02
Extreme (-30C)		824.1009	844.2975	17.4	0.02
25C	10%	824.1009	844.2975	15.7	0.02
	-10%	824.1009	844.2975	17.3	0.02
	End Point	824.1009	844.2975	11.7	0.01

UMTS REL99 BAND 2

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1850.1011	1909.9077		
Extreme (50C)		1850.1011	1909.9077	17.0	0.01
Extreme (40C)		1850.1011	1909.9077	14.5	0.01
Extreme (30C)		1850.1011	1909.9077	18.2	0.01
Extreme (10C)		1850.1011	1909.9077	19.1	0.01
Extreme (0C)		1850.1011	1909.9077	14.6	0.01
Extreme (-10C)		1850.1011	1909.9077	13.9	0.01
Extreme (-20C)		1850.1011	1909.9077	13.5	0.01
Extreme (-30C)		1850.1011	1909.9077	13.2	0.01
25C	10%	1850.1011	1909.9077	18.2	0.01
	-10%	1850.1011	1909.9077	15.2	0.01
	End Point	1850.1011	1909.9077	13.4	0.01

UMTS REL99 BAND 4

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (25C)	Normal	1710.0985	1754.9038		
Extreme (50C)		1710.0985	1754.9038	17.9	0.01
Extreme (40C)		1710.0985	1754.9038	15.5	0.01
Extreme (30C)		1710.0985	1754.9038	15.6	0.01
Extreme (10C)		1710.0985	1754.9038	21.4	0.01
Extreme (0C)		1710.0985	1754.9038	21.4	0.01
Extreme (-10C)		1710.0985	1754.9038	21.9	0.01
Extreme (-20C)		1710.0985	1754.9038	22.4	0.01
Extreme (-30C)		1710.0985	1754.9038	19.1	0.01
25C	10%	1710.0985	1754.9038	15.6	0.01
	-10%	1710.0985	1754.9038	20.2	0.01
	End Point	1710.0985	1754.9038	20.3	0.01

10. RADIATED TEST RESULTS

10.1. RADIATED POWER (ERP & EIRP) (LAT)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50 and §90.635

LIMITS

§22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

§24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

§27.50(d) (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to 1 watt EIRP. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in this band must employ a means for limiting power to the minimum necessary for successful communications

§90.635 Limitations on power and antenna height.

(a) The effective radiated power and antenna height for base stations may not exceed 1 kilowatt (30 dBw) and 304 m. (1,000 ft.) above average terrain (AAT), respectively, or the equivalent thereof as determined from the Table. These are maximum values, and applicants will be required to justify power levels and antenna heights requested.

(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

Table—Equivalent Power and Antenna Heights for Base Stations in the 851–869 MHz and 935–940 MHz Bands Which Have a Requirement for a 32 km (20 mi) Service Area Radius

Antenna height (ATT) meters (feet)	Effective radiated power (watts) ^{1 2 4}
Above 1,372 (4,500)	65
Above 1,220 (4,000) to 1,372 (4,500)	70
Above 1,067 (3,500) to 1,220 (4,000)	75
Above 915 (3,000) to 1,067 (3,500)	100
Above 763 (2,500) to 915 (3,000)	140
Above 610 (2,000) to 763 (2,500)	200
Above 458 (1,500) to 610 (2,000)	350
Above 305 (1,000) to 458 (1,500)	600
Up to 305 (1,000)	³ 1,000

¹Power is given in terms of effective radiated power (ERP).

²Applicants in the Los Angeles, CA, area who demonstrate a need to serve both the downtown and fringe areas will be permitted to utilize an ERP of 1 kw at the following mountaintop sites: Santiago Park, Sierra Peak, Mount Lukens, and Mount Wilson.

³Stations with antennas below 305 m (1,000 ft) (AAT) will be restricted to a maximum power of 1 kw (ERP).

⁴Licensees in San Diego, CA, will be permitted to utilize an ERP of 500 watts at the following mountaintop sites: Palomar, Otay, Woodson and Miguel.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

ANSI / TIA / EIA 603-D Clause 2.2.17

KDB 971168 D01 RF Power output using broadband peak and average power meter method

MODES TESTED

- GPRS/EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, 1xRTT and EVDO, Rev A

RESULTS

10.1.1. GSM

Part 22 / RSS 132 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	28.60	724.44
		190	836.6	28.80	758.58
		251	848.8	28.65	732.82
	EGPRS	128	824.2	25.30	338.84
		190	836.6	25.75	375.84
		251	848.8	26.11	408.32

Part 24 / RSS 133 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	GPRS	512	1850.2	27.42	552.08
		661	1880.0	28.93	781.63
		810	1909.8	29.26	843.33
	EGPRS	512	1850.2	26.77	475.34
		661	1880.0	27.73	592.93
		810	1909.8	28.14	651.63

10.1.2. CDMA2000

Part 90 800MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	450	817.3	20.62	115.35
		560	820.0	20.94	124.17
		670	822.8	21.09	128.53
	BC10, EVDO A	450	817.3	20.64	115.88
		560	820.0	20.97	125.03
		670	822.8	21.13	129.72

Part 22 / RSS 132 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	21.20	131.83
		384	836.5	21.40	138.04
		777	848.3	21.05	127.35
	BC 0, EVDO Rev A	1013	824.7	21.33	135.83
		384	836.5	21.45	139.64
		777	848.3	21.27	133.97

Part 24 / RSS 133 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	24.55	285.10
		600	1880.0	25.10	323.59
		1175	1908.8	25.06	320.63
	BC1, EVDO REV A	25	1851.3	24.58	287.08
		600	1880.0	25.20	331.13
		1175	1908.8	25.11	324.34

10.1.3. UMTS

Part 22 / RSS 132 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4132	826.4	19.87	97.05
		4183	836.6	20.10	102.33
		4233	846.6	20.35	108.39
	UMTS, HSDPA	4132	826.4	18.98	79.07
		4183	836.6	19.07	80.72
		4233	846.6	19.49	88.92

Part 24 / RSS 133 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	24.44	277.97
		9800	1880.0	24.32	270.40
		9938	1907.6	24.66	292.42
	UMTS, HSDPA	9662	1852.4	23.49	223.36
		9800	1880.0	23.56	226.99
		9938	1907.6	23.74	236.59

Part 27 / RSS 139 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	1537	1712.4	26.86	485.29
		1638	1732.6	26.36	432.51
		1738	1752.5	25.78	378.44
	UMTS, HSDPA	1537	1712.4	25.98	396.28
		1638	1732.6	25.95	393.55
		1738	1752.5	25.29	338.06

10.1.4. GSM

GPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 16U23287 Date: 6/17/2016 Test Engineer: 38602 Configuration: EUT only Mode: GSM 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	21.9	V	0.6	0.0	21.25	23.40	38.45	40.60	-17.2	
824.20	29.2	H	0.6	0.0	28.60	30.75	38.45	40.60	-9.9	
Mid Ch										
836.60	22.6	V	0.6	0.0	21.97	24.12	38.45	40.60	-16.5	
836.60	29.4	H	0.6	0.0	28.80	30.95	38.45	40.60	-9.7	
High Ch										
848.80	22.0	V	0.6	0.0	21.39	23.54	38.45	40.60	-17.1	
848.80	29.3	H	0.6	0.0	28.65	30.80	38.45	40.60	-9.8	
Rev. 06.18.14										

EGPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 16U23287 Date: 6/17/2016 Test Engineer: 38602 Configuration: EUT only Mode: EDGE 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	18.7	V	0.6	0.0	18.07	20.22	38.45	40.60	-20.4	
824.20	25.9	H	0.6	0.0	25.30	27.45	38.45	40.60	-13.2	
Mid Ch										
836.60	19.3	V	0.6	0.0	18.69	20.84	38.45	40.60	-19.8	
836.60	26.4	H	0.6	0.0	25.75	27.90	38.45	40.60	-12.7	
High Ch										
848.80	18.8	V	0.6	0.0	18.19	20.34	38.45	40.60	-20.3	
848.80	26.7	H	0.6	0.0	26.11	28.26	38.45	40.60	-12.3	
Rev. 06.18.14										

GPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 16U23287 Date: 6/17/2016 Test Engineer: 38602 Configuration: EUT only Mode: GSM 1900MHz								
Test Equipment: Receiving: Horn T136 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.850	17.4	V	0.98	8.05	24.45	33.0	-8.6	
1.850	20.4	H	0.98	8.05	27.42	33.0	-5.6	
Mid Ch								
1.880	19.9	V	0.98	8.03	26.90	33.0	-6.1	
1.880	21.9	H	0.98	8.03	28.93	33.0	-4.1	
High Ch								
1.910	20.0	V	0.98	8.05	27.02	33.0	-6.0	
1.910	22.2	H	0.98	8.05	29.26	33.0	-3.7	
Rev. 06.18.14								

EGPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company:								
Project #:		16U23287						
Date:		6/17/2016						
Test Engineer:		38602						
Configuration:		EUT only						
Mode:		EDGE 1900MHz						
Test Equipment:								
Receiving: Horn T136 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	17.1	V	0.98	8.05	24.15	33.0	-8.9	
1.851	19.7	H	0.98	8.05	26.77	33.0	-6.2	
Mid Ch								
1.880	19.2	V	0.98	8.03	26.20	33.0	-6.8	
1.880	20.7	H	0.98	8.03	27.73	33.0	-5.3	
High Ch								
1.910	18.9	V	0.98	8.05	25.92	33.0	-7.1	
1.910	21.1	H	0.98	8.05	28.14	33.0	-4.9	
Rev. 06.18.14								

10.1.5. CDMA2000

CDMA2000 1xRTT, 800MHz BC10

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 16U23287 Date: 6/16/2016 Test Engineer: 39005 Configuration: EUT only Mode: CDMA 1XRTT 800MHz								
Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	13.15	V	0.6	0.0	12.53	50.00	-37.5	
817.25	21.24	H	0.6	0.0	20.62	50.00	-29.4	
Mid Ch								
820.00	13.44	V	0.6	0.0	12.82	50.00	-37.2	
820.00	21.56	H	0.6	0.0	20.94	50.00	-29.1	
High Ch								
822.75	13.52	V	0.6	0.0	12.91	50.00	-37.1	
822.75	21.71	H	0.6	0.0	21.09	50.00	-28.9	
Rev. 05.21.15								

EVDO-Rev A, 800MHz BC10

High Frequency Substitution Measurement UL Fremont Radiated Chamber F								
Company:								
Project #:		16U23287						
Date:		6/23/2016						
Test Engineer:		52268						
Configuration:		EUT only						
Mode:		CDMA Rev A 800MHz						
Test Equipment:								
Receiving: Horn T344, and Chamber F SMA Cable								
Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	13.20	V	0.6	0.0	12.58	50.00	-37.4	
817.25	21.26	H	0.6	0.0	20.64	50.00	-29.4	
Mid Ch								
820.00	13.29	V	0.6	0.0	12.67	50.00	-37.3	
820.00	21.59	H	0.6	0.0	20.97	50.00	-29.0	
High Ch								
822.75	13.62	V	0.6	0.0	13.00	50.00	-37.0	
822.75	21.75	H	0.6	0.0	21.13	50.00	-28.9	
Rev. 06.23.16								

CDMA2000 1xRTT, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 16U23287 Date: 6/16/2016 Test Engineer: 39005 Configuration: EUT only Mode: CDMA 1XRTT 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	14.2	V	0.6	0.0	13.58	15.73	38.45	40.60	-24.9	
824.70	21.8	H	0.6	0.0	21.20	23.35	38.45	40.60	-17.3	
Mid Ch										
836.52	14.0	V	0.6	0.0	13.41	15.56	38.45	40.60	-25.0	
836.52	22.0	H	0.6	0.0	21.40	23.55	38.45	40.60	-17.1	
High Ch										
848.31	12.6	V	0.6	0.0	11.94	14.09	38.45	40.60	-26.5	
848.31	21.7	H	0.6	0.0	21.05	23.20	38.45	40.60	-17.4	
Rev. 06.18.14										

EVDO-Rev A, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber F										
Company: Project #: 16U23287 Date: 6/23/2016 Test Engineer: 52268 Configuration: EUT only Mode: CDMA Rev A 850MHz Test Equipment: Receiving: Horn T344, and Chamber F SMA Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	14.6	V	0.6	0.0	14.00	16.15	38.45	40.60	-24.5	
824.70	21.9	H	0.6	0.0	21.33	23.48	38.45	40.60	-17.1	
Mid Ch										
836.52	14.2	V	0.6	0.0	13.62	15.77	38.45	40.60	-24.8	
836.52	22.1	H	0.6	0.0	21.45	23.60	38.45	40.60	-17.0	
High Ch										
848.31	14.7	V	0.6	0.0	14.05	16.20	38.45	40.60	-24.4	
848.31	21.9	H	0.6	0.0	21.27	23.42	38.45	40.60	-17.2	
Rev. 06 23.16										

CDMA2000 1xRTT, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 16U23287 Date: 6/17/2016 Test Engineer: 38602 Configuration: EUT only Mode: CDMA 1XRTT 1900MHz Test Equipment: Receiving: Horn T136 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	13.4	V	0.98	8.05	20.45	33.0	-12.6	
1.851	17.5	H	0.98	8.05	24.55	33.0	-8.5	
Mid Ch								
1.880	15.1	V	0.98	8.03	22.10	33.0	-10.9	
1.880	18.1	H	0.98	8.03	25.10	33.0	-7.9	
High Ch								
1.909	15.0	V	0.98	8.05	22.02	33.0	-11.0	
1.909	18.0	H	0.98	8.05	25.06	33.0	-7.9	
Rev. 06.18.14								

EVDO-Rev A, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company:								
Project #:		16U23287						
Date:		6/16/2016						
Test Engineer:		39005						
Configuration:		EUT only						
Mode:		CDMA Rev A 1900MHz						
Test Equipment:								
Receiving: Horn T136 and Chamber G SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	13.5	V	0.98	8.05	20.57	33.0	-12.4	
1.851	17.5	H	0.98	8.05	24.58	33.0	-8.4	
Mid Ch								
1.880	14.9	V	0.98	8.03	21.97	33.0	-11.0	
1.880	18.2	H	0.98	8.03	25.20	33.0	-7.8	
High Ch								
1.909	14.8	V	0.98	8.05	21.88	33.0	-11.1	
1.909	18.0	H	0.98	8.05	25.11	33.0	-7.9	
Rev. 05.21.15								

10.1.6. UMTS

UMTS REL 99, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 16U23287 Date: 6/17/2016 Test Engineer: 38602 Configuration: EUT only Mode: WCDMA Rel 99 850MHz Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	11.1	V	0.6	0.0	10.44	12.59	38.45	40.60	-28.0	
826.40	20.5	H	0.6	0.0	19.87	22.02	38.45	40.60	-18.6	
Mid Ch										
836.60	10.8	V	0.6	0.0	10.13	12.28	38.45	40.60	-28.3	
836.60	20.7	H	0.6	0.0	20.10	22.25	38.45	40.60	-18.4	
High Ch										
846.60	10.8	V	0.6	0.0	10.21	12.36	38.45	40.60	-28.2	
846.60	21.0	H	0.6	0.0	20.35	22.50	38.45	40.60	-18.1	
Rev. 05.21.15										

UMTS HSDPA, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 16U23287 Date: 6/17/2016 Test Engineer: 38602 Configuration: EUT only Mode: WCDMA DC HSDPA 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	9.9	V	0.6	0.0	9.24	11.39	38.45	40.60	-29.2	
826.40	19.6	H	0.6	0.0	18.98	21.13	38.45	40.60	-19.5	
Mid Ch										
836.60	9.6	V	0.6	0.0	9.00	11.15	38.45	40.60	-29.4	
836.60	19.7	H	0.6	0.0	19.07	21.22	38.45	40.60	-19.4	
High Ch										
846.60	9.8	V	0.6	0.0	9.19	11.34	38.45	40.60	-29.3	
846.60	20.1	H	0.6	0.0	19.49	21.64	38.45	40.60	-19.0	
Rev. 05.26.15										

UMTS REL 99, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber D								
Company:								
Project #: 16U23287								
Date: 06/14/16								
Test Engineer: 30606								
Configuration: EUT Only								
Mode: WCDMA Rel 99 1900MHz								
Test Equipment:								
Receiving: Horn T344 and Chamber D SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	15.2	V	0.98	8.05	22.31	33.0	-10.7	
1.852	17.4	H	0.98	8.05	24.44	33.0	-8.6	
Mid Ch								
1.880	15.8	V	0.98	8.03	22.87	33.0	-10.1	
1.880	17.3	H	0.98	8.03	24.32	33.0	-8.7	
High Ch								
1.908	15.9	V	0.98	8.04	22.99	33.0	-10.0	
1.908	17.6	H	0.98	8.04	24.66	33.0	-8.3	
Rev. 05.21.15								

UMTS HSDPA, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber D								
Company:								
Project #: 16U23287								
Date: 06/14/16								
Test Engineer: 30606								
Configuration: EUT Only								
Mode: WCDMA DC HSDPA 1900MHz								
Test Equipment:								
Receiving: Horn T344 and Chamber D SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	15.0	V	0.98	8.05	22.07	33.0	-10.9	
1.852	16.4	H	0.98	8.05	23.49	33.0	-9.5	
Mid Ch								
1.880	15.1	V	0.98	8.03	22.15	33.0	-10.9	
1.880	16.5	H	0.98	8.03	23.56	33.0	-9.4	
High Ch								
1.908	15.3	V	0.98	8.04	22.33	33.0	-10.7	
1.908	16.7	H	0.98	8.04	23.74	33.0	-9.3	
Rev. 05.21.15								

UMTS REL 99, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber D								
Company: Project #: 16U23287 Date: 06/14/16 Test Engineer: 30606 Configuration: EUT Only Mode: WCDMA Rel 99 1700MHz								
Test Equipment: Receiving: Horn T344 and Chamber D SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	15.6	V	0.95	8.27	22.88	30.0	-7.1	
1.712	19.5	H	0.95	8.27	26.86	30.0	-3.1	
Mid Ch								
1.733	16.2	V	0.95	8.23	23.49	30.0	-6.5	
1.733	19.1	H	0.95	8.23	26.36	30.0	-3.6	
High Ch								
1.753	14.6	V	0.95	8.18	21.82	30.0	-8.2	
1.753	18.5	H	0.95	8.18	25.78	30.0	-4.2	
Rev. 05.21.15								

UMTS HSDPA, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber D								
Company: Project #: 16U23287 Date: 06/14/16 Test Engineer: 30606 Configuration: EUT Only Mode: WCDMA DC HSDPA 1700MHz								
Test Equipment: Receiving: Horn T344 and Chamber D SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	15.1	V	0.95	8.27	22.42	30.0	-7.6	
1.712	18.7	H	0.95	8.27	25.98	30.0	-4.0	
Mid Ch								
1.733	15.5	V	0.95	8.23	22.81	30.0	-7.2	
1.733	18.7	H	0.95	8.23	25.95	30.0	-4.1	
High Ch								
1.753	15.4	V	0.95	8.18	22.62	30.0	-7.4	
1.753	18.1	H	0.95	8.18	25.29	30.0	-4.7	
Rev. 05.21.15								

10.2. RADIATED POWER (ERP & EIRP) (UAT)

10.2.1. GSM

Part 22 / RSS 132 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	GPRS	128	824.2	24.39	274.79
		190	836.6	24.14	259.42
		251	848.8	23.85	242.66
	EGPRS	128	824.2	21.20	131.83
		190	836.6	20.60	114.82
		251	848.8	20.45	110.92

Part 24 / RSS 133 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	GPRS	512	1850.2	20.04	100.93
		661	1880.0	21.19	131.52
		810	1909.8	20.96	124.74
	EGPRS	512	1850.2	19.35	86.10
		661	1880.0	20.53	112.98
		810	1909.8	20.02	100.46

10.2.2. CDMA2000

Part 90 800MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC10, 1xRTT	450	817.3	18.96	78.70
		560	820.0	18.66	73.45
		670	822.8	18.53	71.29
	BC10, EVDO A	450	817.3	19.03	79.98
		560	820.0	18.69	73.96
		670	822.8	18.63	72.95

Part 22 / RSS 132 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	BC 0, 1xRTT	1013	824.7	19.08	80.91
		384	836.5	18.95	78.52
		777	848.3	18.61	72.61
	BC 0, EVDO Rev A	1013	824.7	19.11	81.47
		384	836.5	18.98	79.07
		777	848.3	18.64	73.11

Part 24 / RSS 133 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	BC1, 1xRTT	25	1851.3	19.53	89.74
		600	1880.0	20.23	105.44
		1175	1908.8	19.41	87.30
	BC1, EVDO REV A	25	1851.3	19.58	90.78
		600	1880.0	20.31	107.40
		1175	1908.8	19.45	88.10

10.2.3. UMTS

Part 22 / RSS 132 850MHz Band

Band	Mode	Channel	f (MHz)	ERP (Average)	
				dBm	mW
CELL	UMTS,REL 99	4132	826.4	17.85	60.95
		4183	836.6	17.61	57.68
		4233	846.6	17.35	54.33
	UMTS, HSDPA	4132	826.4	16.73	47.10
		4183	836.6	16.50	44.67
		4233	846.6	16.25	42.17

Part 24 / RSS 133 1900MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
PCS	UMTS,REL 99	9662	1852.4	20.24	105.68
		9800	1880.0	20.53	112.98
		9938	1907.6	20.38	109.14
	UMTS, HSDPA	9662	1852.4	20.03	100.69
		9800	1880.0	20.29	106.91
		9938	1907.6	20.06	101.39

Part 27 / RSS 139 1700MHz Band

Band	Mode	Channel	f (MHz)	EIRP (Average)	
				dBm	mW
1700	UMTS,REL 99	1537	1712.4	20.28	106.66
		1638	1732.6	20.50	112.20
		1738	1752.5	20.14	103.28
	UMTS, HSDPA	1537	1712.4	19.87	97.05
		1638	1732.6	20.08	101.86
		1738	1752.5	19.84	96.38

10.2.4. GSM

GPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 16U23287 Date: 06/18/16 Test Engineer: 38602 Configuration: EUT Only Mode: GSM 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	19.0	V	0.6	0.0	18.37	20.52	38.45	40.60	-20.1	
824.20	25.0	H	0.6	0.0	24.39	26.54	38.45	40.60	-14.1	
Mid Ch										
836.60	17.9	V	0.6	0.0	17.31	19.46	38.45	40.60	-21.1	
836.60	24.8	H	0.6	0.0	24.14	26.29	38.45	40.60	-14.3	
High Ch										
848.80	16.8	V	0.6	0.0	16.19	18.34	38.45	40.60	-22.3	
848.80	24.5	H	0.6	0.0	23.85	26.00	38.45	40.60	-14.6	
Rev. 06.18.14										

EGPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 16U23287 Date: 06/18/16 Test Engineer: 38602 Configuration: EUT Only Mode: EDGE 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.20	14.5	V	0.6	0.0	13.87	16.02	38.45	40.60	-24.6	
824.20	21.8	H	0.6	0.0	21.20	23.35	38.45	40.60	-17.2	
Mid Ch										
836.60	14.0	V	0.6	0.0	13.41	15.56	38.45	40.60	-25.0	
836.60	21.2	H	0.6	0.0	20.60	22.75	38.45	40.60	-17.8	
High Ch										
848.80	12.6	V	0.6	0.0	11.99	14.14	38.45	40.60	-26.5	
848.80	21.1	H	0.6	0.0	20.45	22.60	38.45	40.60	-18.0	
Rev. 06.18.14										

GPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 16U23287 Date: 06/18/16 Test Engineer: 38602 Configuration: EUT Only Mode: GSM 1900MHz								
Test Equipment: Receiving: Horn T136 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	11.4	V	0.98	8.05	18.45	33.0	-14.6	
1.851	13.0	H	0.98	8.05	20.04	33.0	-13.0	
Mid Ch								
1.880	12.3	V	0.98	8.03	19.30	33.0	-13.7	
1.880	14.1	H	0.98	8.03	21.19	33.0	-11.8	
High Ch								
1.910	11.7	V	0.98	8.05	18.72	33.0	-14.3	
1.910	13.9	H	0.98	8.05	20.96	33.0	-12.0	
Rev. 06.18.14								

EGPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 16U23287 Date: 06/18/16 Test Engineer: 38602 Configuration: EUT Only Mode: EDGE 1900MHz								
Test Equipment: Receiving: Horn T136 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	9.9	V	0.98	8.05	17.00	33.0	-16.0	
1.851	12.3	H	0.98	8.05	19.35	33.0	-13.7	
Mid Ch								
1.880	11.2	V	0.98	8.03	18.20	33.0	-14.8	
1.880	13.5	H	0.98	8.03	20.53	33.0	-12.5	
High Ch								
1.910	10.6	V	0.98	8.05	17.62	33.0	-15.4	
1.910	13.0	H	0.98	8.05	20.02	33.0	-13.0	
Rev. 06.18.14								

10.2.5. CDMA2000

CDMA2000 1xRTT, 800MHz BC10

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 16U23287 Date: 6/17/2016 Test Engineer: 39005 Configuration: EUT only Mode: CDMA 1XRTT 800MHz								
Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	12.24	V	0.6	0.0	11.62	50.00	-38.4	
817.25	19.58	H	0.6	0.0	18.96	50.00	-31.0	
Mid Ch								
820.00	11.94	V	0.6	0.0	11.32	50.00	-38.7	
820.00	19.28	H	0.6	0.0	18.66	50.00	-31.3	
High Ch								
822.75	12.09	V	0.6	0.0	11.47	50.00	-38.5	
822.75	19.15	H	0.6	0.0	18.53	50.00	-31.5	
Rev. 05.21.15								

EVDO-Rev A, 800MHz BC10

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company:								
Project #:		16U23287						
Date:		6/17/2016						
Test Engineer:		39005						
Configuration:		EUT only						
Mode:		CDMA Rev A 800MHz						
Test Equipment:								
Receiving: Sunol T900, and Chamber G Cable								
Substitution: Dipole S/N: 00022117, 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
817.25	12.26	V	0.6	0.0	11.64	50.00	-38.4	
817.25	19.65	H	0.6	0.0	19.03	50.00	-31.0	
Mid Ch								
820.00	11.96	V	0.6	0.0	11.34	50.00	-38.7	
820.00	19.31	H	0.6	0.0	18.69	50.00	-31.3	
High Ch								
822.75	12.10	V	0.6	0.0	11.48	50.00	-38.5	
822.75	19.25	H	0.6	0.0	18.63	50.00	-31.4	
Rev. 05.21.15								

CDMA2000 1xRTT, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 16U23287 Date: 6/17/2016 Test Engineer: 39005 Configuration: EUT only Mode: CDMA 1XRTT 850MHz Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	12.7	V	0.6	0.0	12.12	14.27	38.45	40.60	-26.3	
824.70	19.7	H	0.6	0.0	19.08	21.23	38.45	40.60	-19.4	
Mid Ch										
836.52	12.3	V	0.6	0.0	11.72	13.87	38.45	40.60	-26.7	
836.52	19.6	H	0.6	0.0	18.95	21.10	38.45	40.60	-19.5	
High Ch										
848.31	11.5	V	0.6	0.0	10.84	12.99	38.45	40.60	-27.6	
848.31	19.2	H	0.6	0.0	18.61	20.76	38.45	40.60	-19.8	
Rev. 06.18.14										

EVDO-Rev A, 850MHz BC0

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 16U23287 Date: 6/17/2016 Test Engineer: 39005 Configuration: EUT only Mode: CDMA Rev A 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
824.70	12.7	V	0.6	0.0	12.12	14.27	38.45	40.60	-26.3	
824.70	19.7	H	0.6	0.0	19.11	21.26	38.45	40.60	-19.3	
Mid Ch										
836.52	12.3	V	0.6	0.0	11.72	13.87	38.45	40.60	-26.7	
836.52	19.6	H	0.6	0.0	18.98	21.13	38.45	40.60	-19.5	
High Ch										
848.31	11.5	V	0.6	0.0	10.84	12.99	38.45	40.60	-27.6	
848.31	19.3	H	0.6	0.0	18.64	20.79	38.45	40.60	-19.8	
Rev. 06.18.14										

CDMA2000 1xRTT, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 16U23287 Date: 6/17/2016 Test Engineer: 39005 Configuration: EUT only Mode: CDMA 1XRTT 1900MHz								
Test Equipment: Receiving: Horn T136 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	8.6	V	0.98	8.05	15.62	33.0	-17.4	
1.851	12.5	H	0.98	8.05	19.53	33.0	-13.5	
Mid Ch								
1.880	10.1	V	0.98	8.03	17.19	33.0	-15.8	
1.880	13.2	H	0.98	8.03	20.23	33.0	-12.8	
High Ch								
1.909	9.1	V	0.98	8.05	16.19	33.0	-16.8	
1.909	12.3	H	0.98	8.05	19.41	33.0	-13.6	
Rev. 06.18.14								

EVDO-Rev A, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber G								
Company: Project #: 16U23287 Date: 6/17/2016 Test Engineer: 39005 Configuration: EUT only Mode: CDMA Rev A 1900MHz								
Test Equipment: Receiving: Horn T136 and Chamber G SMA Cables Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.851	8.8	V	0.98	8.05	15.85	33.0	-17.2	
1.851	12.5	H	0.98	8.05	19.58	33.0	-13.4	
Mid Ch								
1.880	9.9	V	0.98	8.03	16.92	33.0	-16.1	
1.880	13.3	H	0.98	8.03	20.31	33.0	-12.7	
High Ch								
1.909	9.3	V	0.98	8.05	16.35	33.0	-16.6	
1.909	12.4	H	0.98	8.05	19.45	33.0	-13.6	
Rev. 05.21.15								

10.2.6. UMTS

UMTS REL 99, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 16U23287 Date: 06/16/16 Test Engineer: 39004 Configuration: EUT Only Mode: WCDMA Rel 99 850MHz Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	12.2	V	0.6	0.0	11.53	13.68	38.45	40.60	-26.9	
826.40	18.5	H	0.6	0.0	17.85	20.00	38.45	40.60	-20.6	
Mid Ch										
836.60	11.9	V	0.6	0.0	11.31	13.46	38.45	40.60	-27.1	
836.60	18.2	H	0.6	0.0	17.61	19.76	38.45	40.60	-20.8	
High Ch										
846.60	11.1	V	0.6	0.0	10.49	12.64	38.45	40.60	-28.0	
846.60	18.0	H	0.6	0.0	17.35	19.50	38.45	40.60	-21.1	
Rev. 05.21.15										

UMTS HSDPA, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber G										
Company: Project #: 16U23287 Date: 06/16/16 Test Engineer: 39004 Configuration: EUT Only Mode: WCDMA DC HSDPA 850MHz										
Test Equipment: Receiving: Sunol T900, and Chamber G Cable Substitution: Dipole S/N: 00022117, 8ft SMA Cable										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	EIRP (dBm)	ERP Limit (dBm)	EIRP Limit (dBm)	Margin (dB)	Notes
Low Ch										
826.40	11.2	V	0.6	0.0	10.55	12.70	38.45	40.60	-27.9	
826.40	17.4	H	0.6	0.0	16.73	18.88	38.45	40.60	-21.7	
Mid Ch										
836.60	10.9	V	0.6	0.0	10.29	12.44	38.45	40.60	-28.2	
836.60	17.1	H	0.6	0.0	16.50	18.65	38.45	40.60	-21.9	
High Ch										
846.60	10.0	V	0.6	0.0	9.39	11.54	38.45	40.60	-29.1	
846.60	16.9	H	0.6	0.0	16.25	18.40	38.45	40.60	-22.2	
Rev. 05.21.15										

UMTS REL 99, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber E								
Company:								
Project #:		16U23287						
Date:		06/16/16						
Test Engineer:		39004						
Configuration:		EUT Only						
Mode:		WCDMA Rel 99 1900MHz						
Test Equipment:								
Receiving: Horn T711 and Chamber D SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	3.1	V	0.98	8.05	10.20	33.0	-22.8	
1.852	13.2	H	0.98	8.05	20.24	33.0	-12.8	
Mid Ch								
1.880	3.6	V	0.98	8.03	10.63	33.0	-22.4	
1.880	13.5	H	0.98	8.03	20.53	33.0	-12.5	
High Ch								
1.908	3.6	V	0.98	8.04	10.62	33.0	-22.4	
1.908	13.3	H	0.98	8.04	20.38	33.0	-12.6	
Rev. 05.21.15								

UMTS HSDPA, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber E								
Company:								
Project #:		16U23287						
Date:		06/16/16						
Test Engineer:		39004						
Configuration:		EUT Only						
Mode:		WCDMA DC HSDPA 1900MHz						
Test Equipment:								
Receiving: Horn T711 and Chamber E SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.852	3.0	V	0.98	8.05	10.10	33.0	-22.9	
1.852	13.0	H	0.98	8.05	20.03	33.0	-13.0	
Mid Ch								
1.880	3.7	V	0.98	8.03	10.75	33.0	-22.3	
1.880	13.2	H	0.98	8.03	20.29	33.0	-12.7	
High Ch								
1.908	3.8	V	0.98	8.04	10.83	33.0	-22.2	
1.908	13.0	H	0.98	8.04	20.06	33.0	-12.9	
Rev. 05.21.15								

UMTS REL 99, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber E								
Company:								
Project #: 16U23287								
Date: 06/16/16								
Test Engineer: 39004								
Configuration: EUT Only								
Mode: WCDMA Rel 99 1700MHz								
Test Equipment:								
Receiving: Horn T711 and Chamber E SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	8.7	V	0.95	8.27	16.02	30.0	-14.0	
1.712	13.0	H	0.95	8.27	20.28	30.0	-9.7	
Mid Ch								
1.733	9.7	V	0.95	8.23	16.94	30.0	-13.1	
1.733	13.2	H	0.95	8.23	20.50	30.0	-9.5	
High Ch								
1.753	9.4	V	0.95	8.18	16.67	30.0	-13.3	
1.753	12.9	H	0.95	8.18	20.14	30.0	-9.9	
Rev. 05.21.15								

UMTS HSDPA, 1700MHz BAND 4

High Frequency Substitution Measurement UL Fremont Radiated Chamber E								
Company:								
Project #: 16U23287								
Date: 06/16/16								
Test Engineer: 39004								
Configuration: EUT Only								
Mode: WCDMA DC HSDPA 1700MHz								
Test Equipment:								
Receiving: Horn T711 and Chamber E SMA Cables								
Substitution: Horn T59 Substitution, and 8ft SMA Cable								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1.712	8.4	V	0.95	8.27	15.75	30.0	-14.3	
1.712	12.6	H	0.95	8.27	19.87	30.0	-10.1	
Mid Ch								
1.733	9.3	V	0.95	8.23	16.54	30.0	-13.5	
1.733	12.8	H	0.95	8.23	20.08	30.0	-9.9	
High Ch								
1.753	9.0	V	0.95	8.18	16.27	30.0	-13.7	
1.753	12.6	H	0.95	8.18	19.84	30.0	-10.2	
Rev. 05.21.15								

10.3. PEAK-TO-AVERAGE RATIO

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

ID:	39472	Date:	2/25/16
------------	-------	--------------	---------

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio
		*Peak	Average	
GSM850	GPRS	34.02	33.30	0.72
	EGPRS	31.84	28.57	3.27
GSM1900	GPRS	30.83	30.18	0.65
	EGPRS	31.71	28.01	3.70
*Peak Reading = Average Reading + Peak-to-Average Ratio				


ID:	29439	Date:	7/14/16
------------	-------	--------------	---------

Mode	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio
		*Peak	Average	
CDMA2000 BC0	1xRTT	29.57	25	4.57
	EVDO A	29.04	24.95	4.09
CDMA2000 BC1	1xRTT	28.71	25.15	3.56
	EVDO A	29.15	25.06	4.09
CDMA2000 BC10	1xRTT	29.48	24.99	4.49
	EVDO A	29.52	24.97	4.55
*Peak Reading = Average Reading + Peak-to-Average Ratio				


ID:	29349	Date:	7/14/16
------------	-------	--------------	---------

Mode	Modulation	Couducted Power (dBm)		Peak-to-Average Ratio
		*Peak	Average	
UMTS Band 5	REL99	27.91	24.99	2.92
	HSDPA	27.65	23.98	3.67
UMTS Band 2	REL99	28.14	25.01	3.13
	HSDPA	27.91	24.17	3.74
UMTS Band 4	REL99	28.17	25.2	2.97
	HSDPA	28.09	24.19	3.90
*Peak Reading = Average Reading + Peak-to-Average Ratio				


GSM850, GPRS

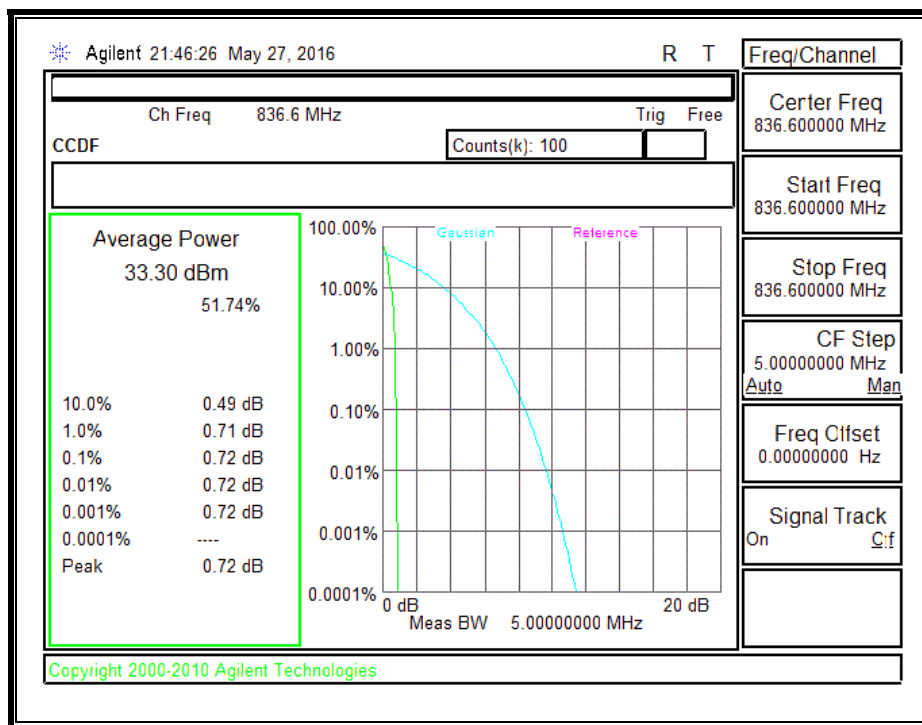


GSM850, EGPRS

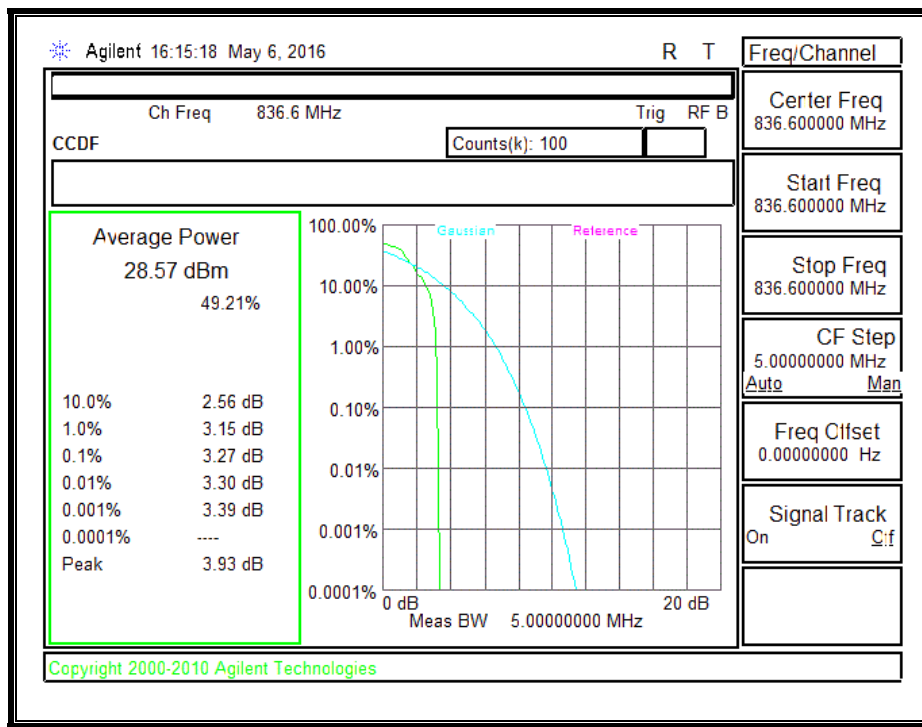


GSM1900, GPRS

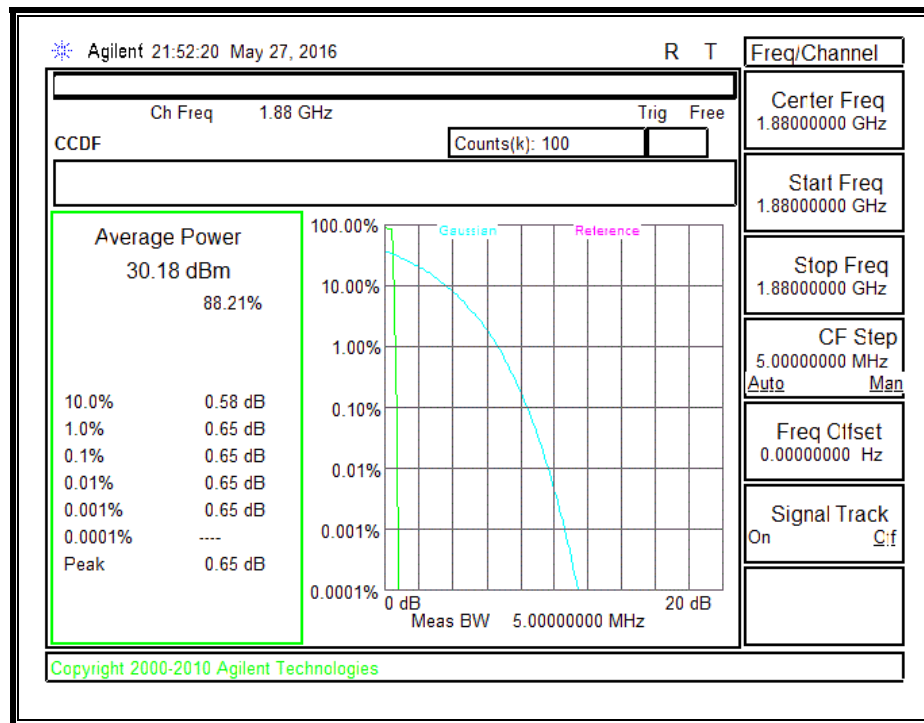


GSM1900, EGPRS

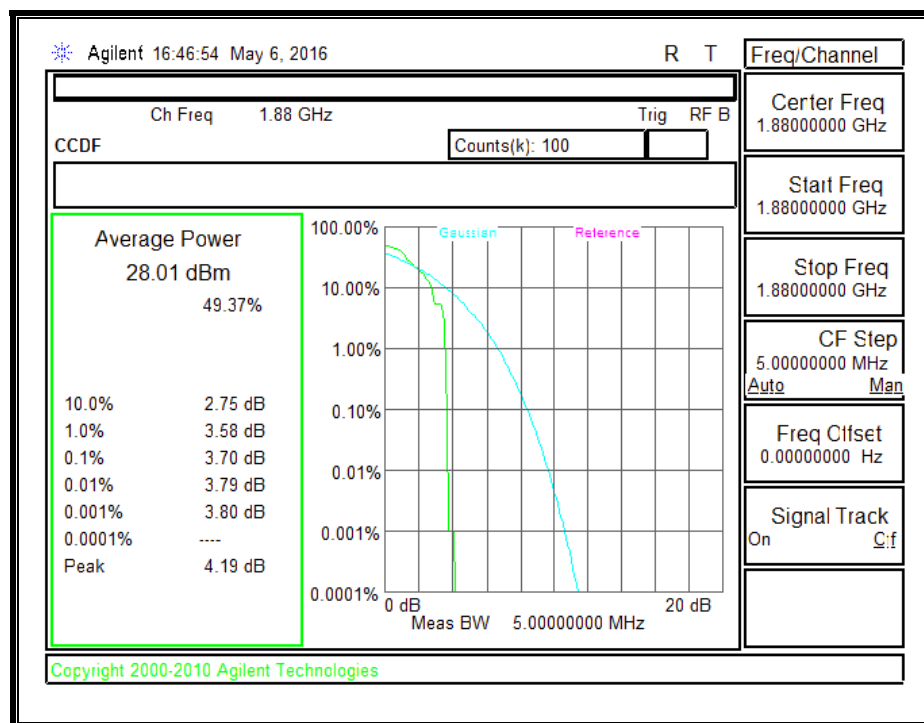


BC 0, 1xRTT

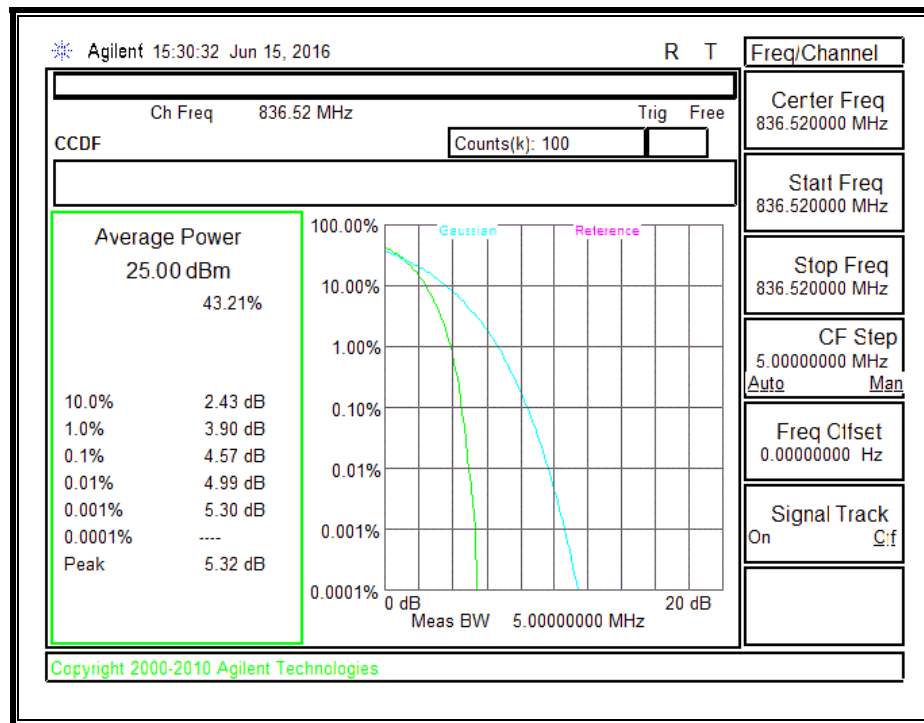


BC 0, EVDO A

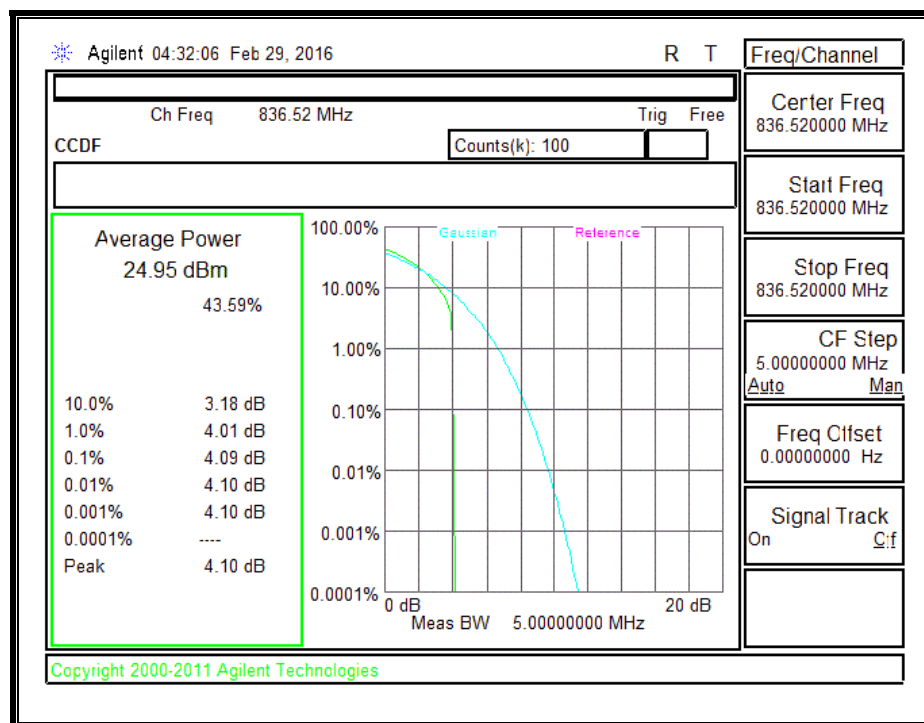


BC 1, 1xRTT

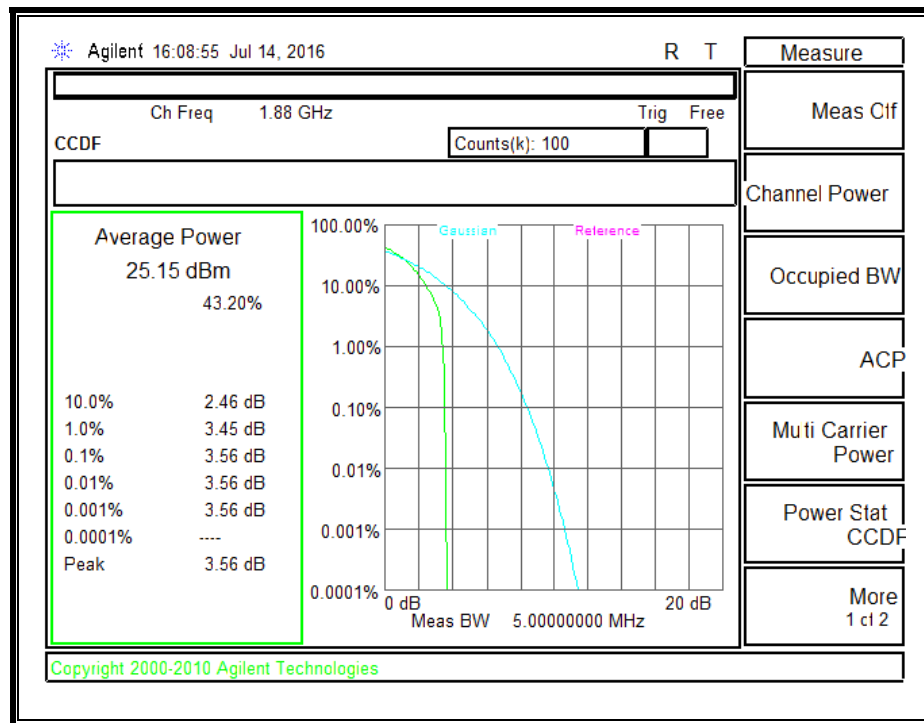


BC 1, EVDO A

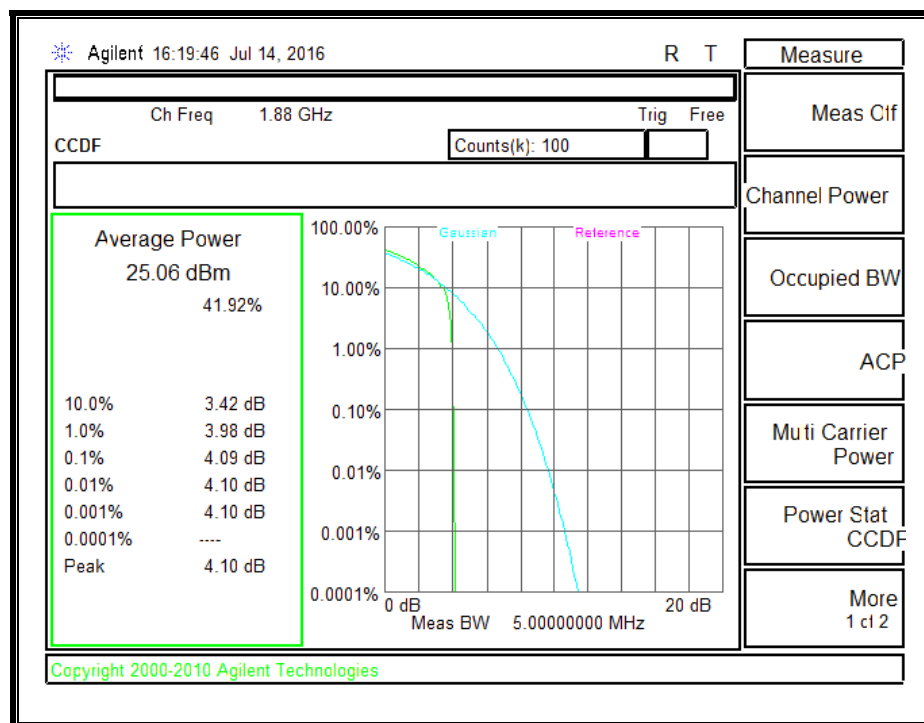


BC10, 1xRTT

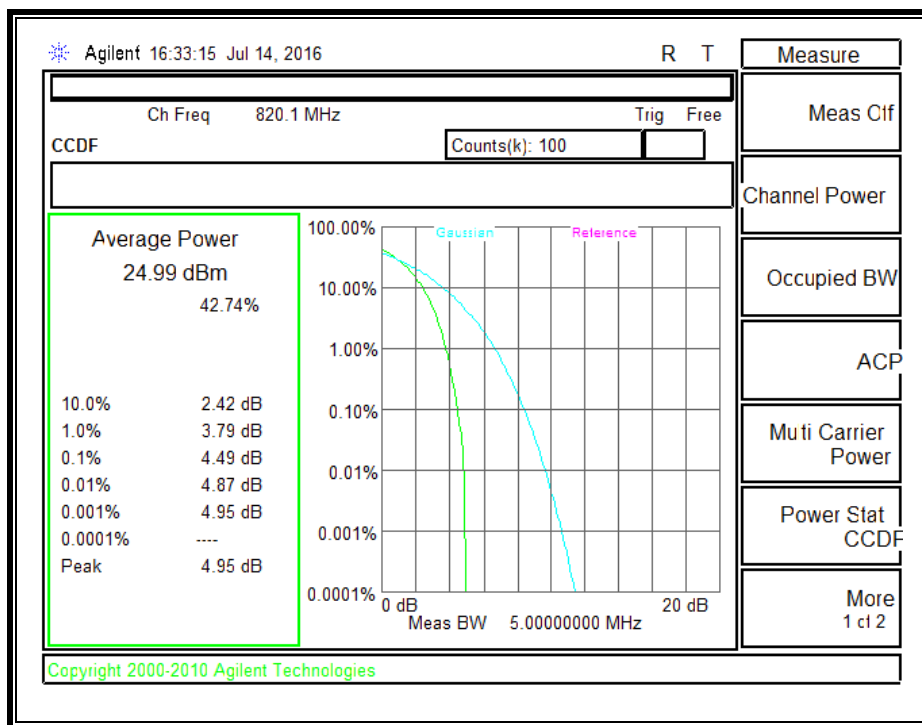


BC10, EVDO A

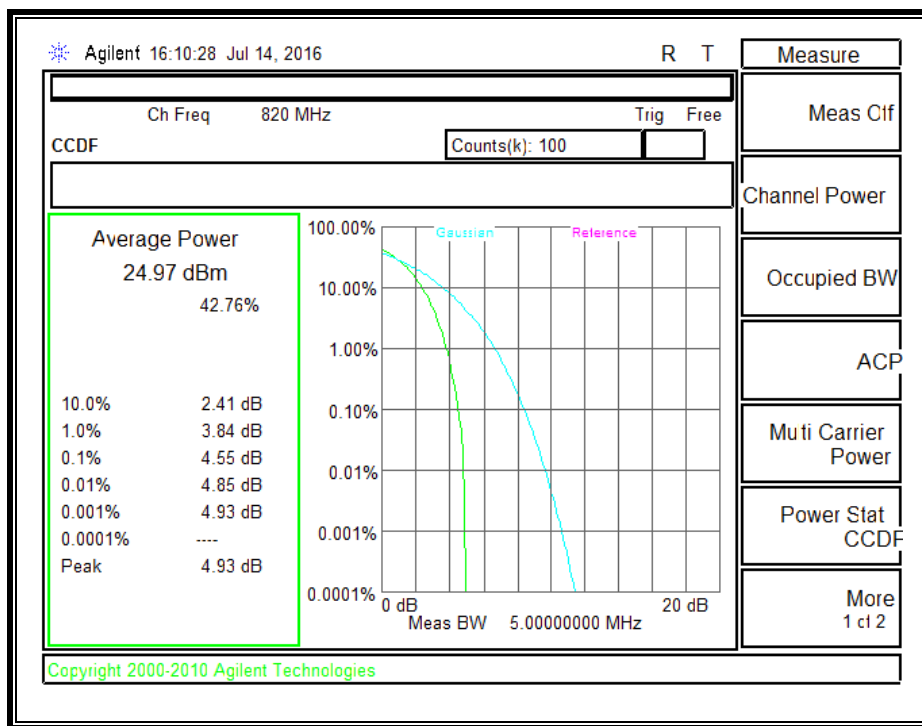


UMTS850, REL 99 BAND 5

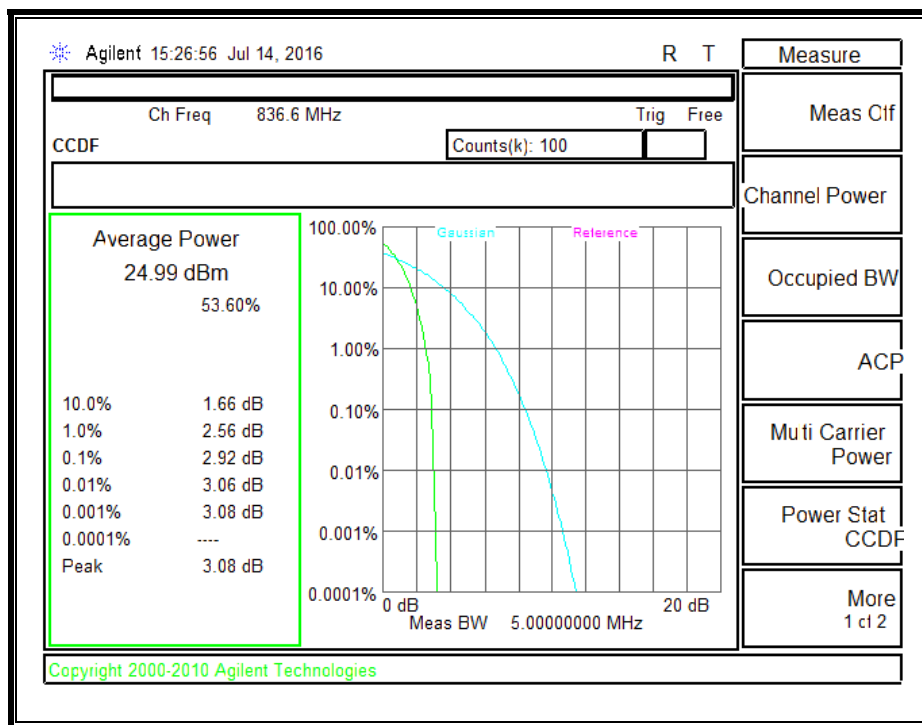


UMTS 850, HSDPA BAND 5

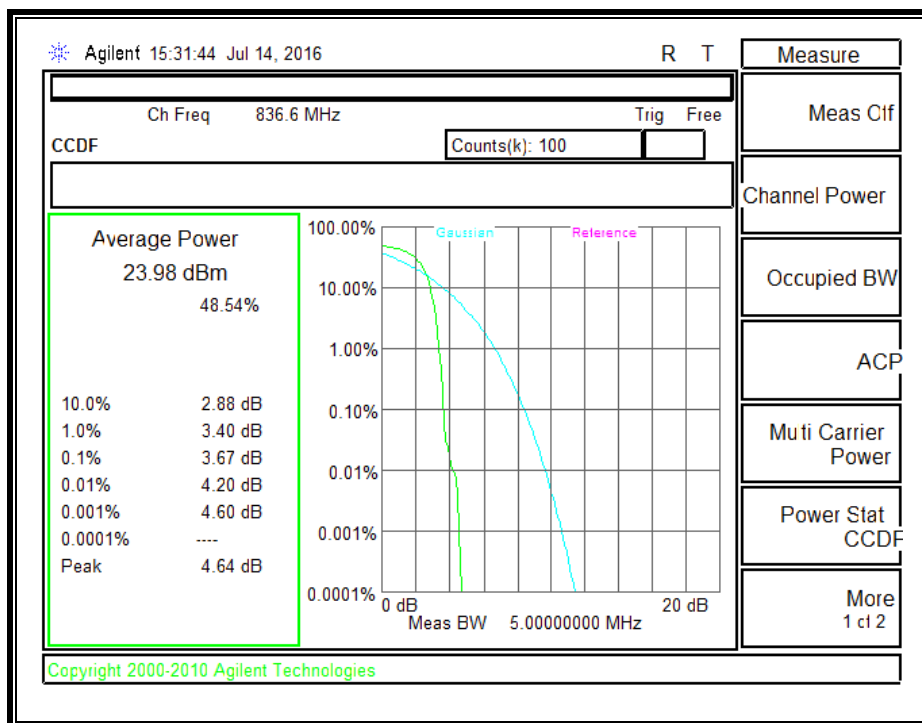


UMTS 1900, REL99 BAND 2

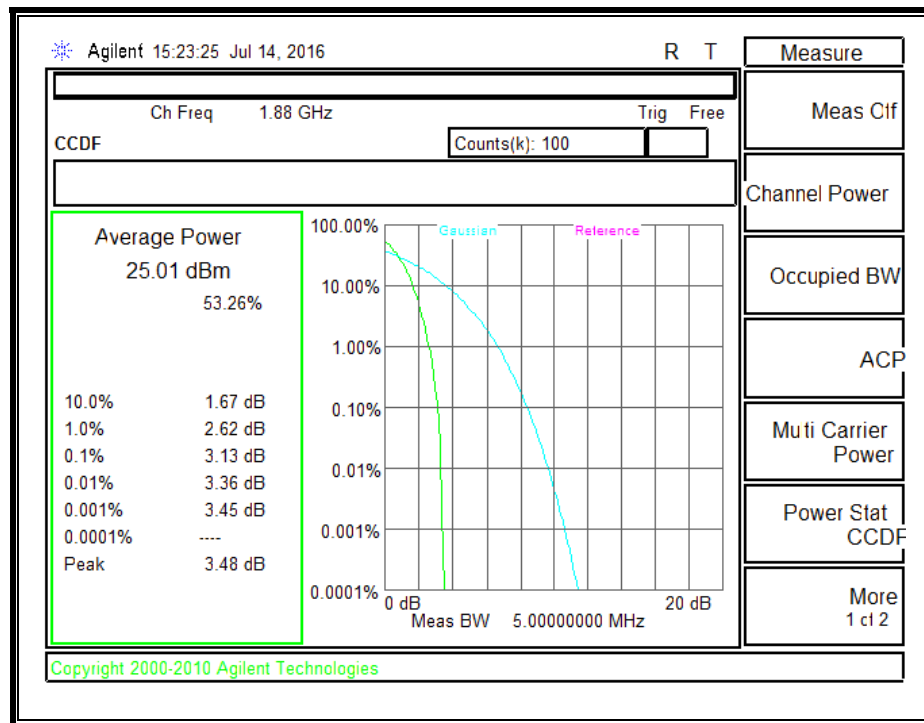


UMTS 1900, HSDPA BAND 2

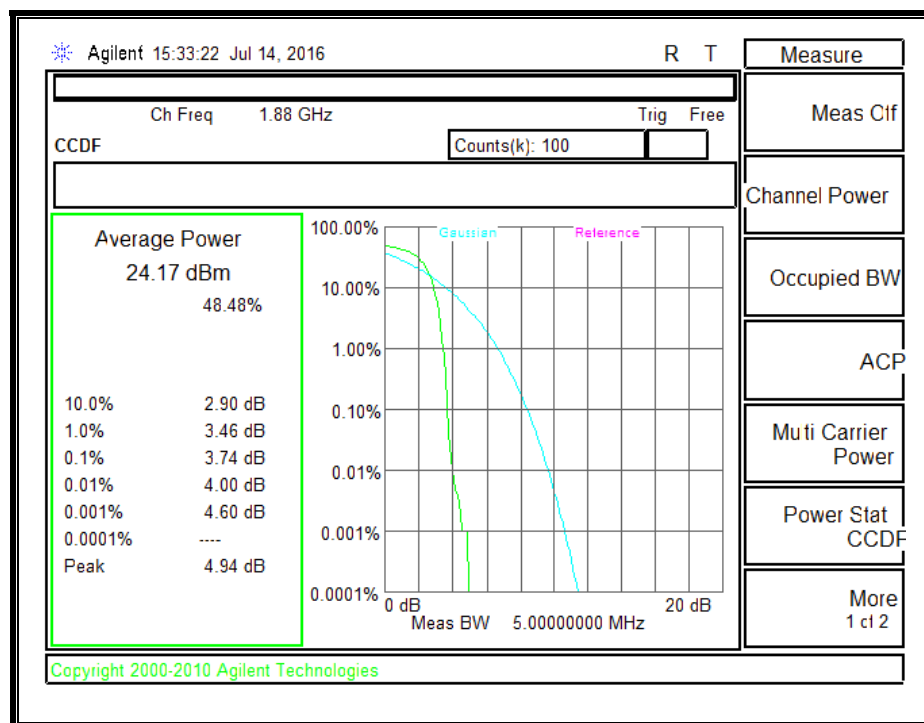

UMTS 1700, REL99 BAND 4

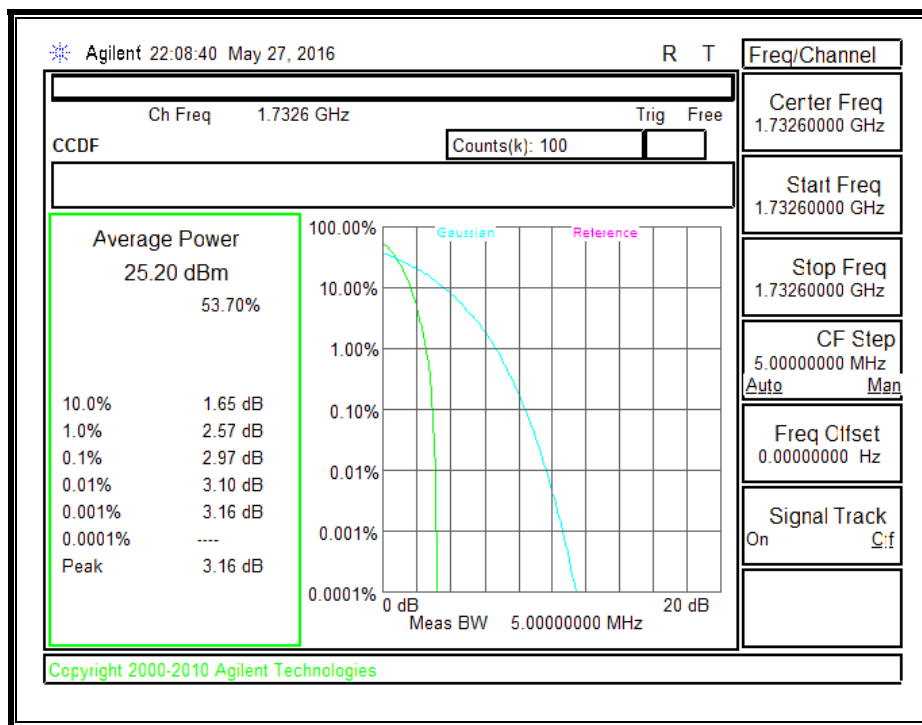

UMTS 1700, HSDPA BAND 4

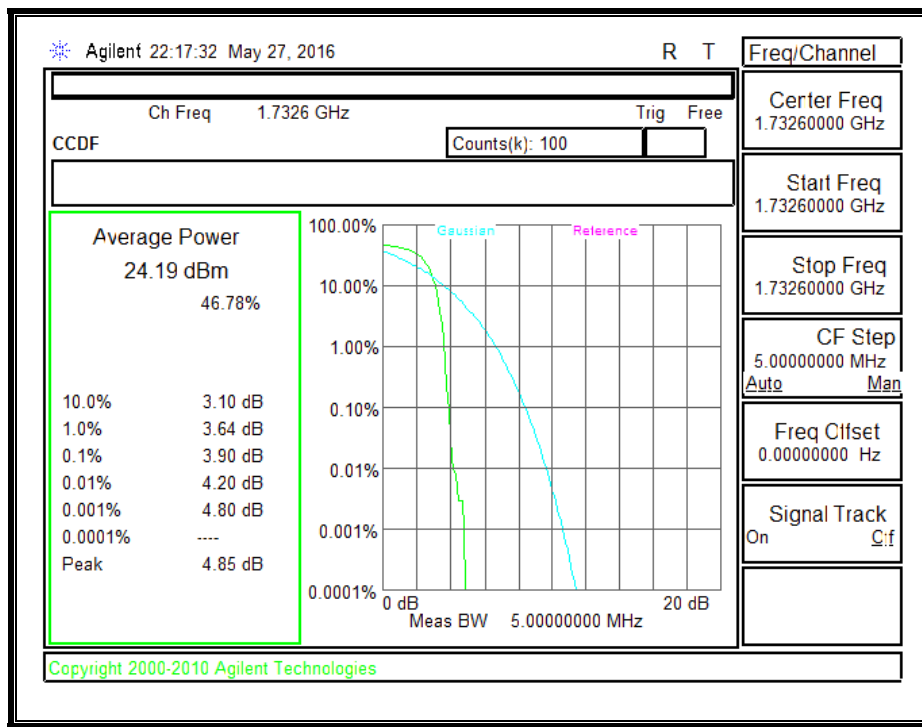

10.4. FIELD STRENGTH OF SPURIOUS RADIATION (LAT)

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53 and §90.691.

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB

§90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10} (f/6.1)$ decibels or $50 + 10 \log_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

- GPRS/EGPRS
- UMTS, REL 99 and HSDPA
- CDMA2000, 1xRTT and EVDO, Rev A

RESULTS

10.4.1. GSM

GPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: 16U23287 Date: 05/10/16 Test Engineer: 38602 Configuration: EUT only Mode: GPRS 850MHz											
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable											
Chamber		Pre-amplifier		Filter		Limit					
3m Chamber G		3m Chamber G		Filter		EIRP					
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Low Channel (824.2MHz)											
1.65	-53.2	H	3.0	-11.7	37.8	1.0	-48.6	-13.0	-35.6		
2.47	-63.2	H	3.0	-20.1	36.6	1.0	-55.6	-13.0	-42.6		
3.30	-63.0	H	3.0	-17.1	36.5	1.0	-52.6	-13.0	-39.6		
1.65	-57.1	V	3.0	-15.3	37.8	1.0	-52.2	-13.0	-39.2		
2.47	-63.4	V	3.0	-19.4	36.6	1.0	-55.0	-13.0	-42.0		
3.30	-63.9	V	3.0	-18.0	36.5	1.0	-53.5	-13.0	-40.5		
Mid Channel (836.6MHz)											
1.67	-57.0	H	3.0	-15.5	37.8	1.0	-52.3	-13.0	-39.3		
2.51	-61.4	H	3.0	-18.2	36.4	1.0	-53.6	-13.0	-40.6		
3.35	-63.3	H	3.0	-17.3	36.5	1.0	-52.7	-13.0	-39.7		
1.67	-54.2	V	3.0	-12.4	37.8	1.0	-49.3	-13.0	-36.3		
2.51	-63.3	V	3.0	-19.1	36.4	1.0	-54.4	-13.0	-41.4		
3.35	-63.7	V	3.0	-17.6	36.5	1.0	-53.1	-13.0	-40.1		
High Channel (848.8MHz)											
1.70	-59.0	H	3.0	-17.5	37.8	1.0	-54.3	-13.0	-41.3		
2.55	-63.0	H	3.0	-19.6	36.4	1.0	-55.0	-13.0	-42.0		
3.40	-63.1	H	3.0	-17.0	36.4	1.0	-52.4	-13.0	-39.4		
1.70	-58.5	V	3.0	-16.7	37.8	1.0	-53.5	-13.0	-40.5		
2.55	-63.4	V	3.0	-19.1	36.4	1.0	-54.5	-13.0	-41.5		
3.40	-62.7	V	3.0	-16.5	36.4	1.0	-51.9	-13.0	-38.9		
Rev. 03.19.15											

EGPRS, 850MHz BAND 5

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 16U23287
Date: 05/10/16
Test Engineer: 38602
Configuration: EUT only
Mode: EGPRS 850MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber G

Pre-amplifier
 3m Chamber G

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.2MHz)										
1.65	-61.1	H	3.0	-19.6	37.8	1.0	-56.5	-13.0	-43.5	
2.47	-63.2	H	3.0	-20.1	36.6	1.0	-55.6	-13.0	-42.6	
3.30	-63.3	H	3.0	-17.4	36.5	1.0	-52.9	-13.0	-39.9	
1.65	-61.8	V	3.0	-20.0	37.8	1.0	-56.9	-13.0	-43.9	
2.47	-63.6	V	3.0	-19.6	36.6	1.0	-55.2	-13.0	-42.2	
3.30	-63.9	V	3.0	-18.0	36.5	1.0	-53.5	-13.0	-40.5	
Mid Channel (836.6MHz)										
1.67	-59.8	H	3.0	-18.3	37.8	1.0	-55.1	-13.0	-42.1	
2.51	-63.3	H	3.0	-20.1	36.4	1.0	-55.5	-13.0	-42.5	
3.35	-63.4	H	3.0	-17.4	36.5	1.0	-52.8	-13.0	-39.8	
1.67	-59.6	V	3.0	-17.8	37.8	1.0	-54.7	-13.0	-41.7	
2.51	-63.3	V	3.0	-19.1	36.4	1.0	-54.4	-13.0	-41.4	
3.35	-63.5	V	3.0	-17.4	36.5	1.0	-52.9	-13.0	-39.9	
High Channel (848.8MHz)										
1.70	-59.0	H	3.0	-17.5	37.8	1.0	-54.3	-13.0	-41.3	
2.55	-63.7	H	3.0	-20.3	36.4	1.0	-55.7	-13.0	-42.7	
3.40	-63.5	H	3.0	-17.4	36.4	1.0	-52.8	-13.0	-39.8	
1.70	-59.3	V	3.0	-17.5	37.8	1.0	-54.3	-13.0	-41.3	
2.55	-62.9	V	3.0	-18.6	36.4	1.0	-54.0	-13.0	-41.0	
3.40	-63.5	V	3.0	-17.3	36.4	1.0	-52.7	-13.0	-39.7	

Rev. 03.19.15

GPRS, 1900MHz BAND 2

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 16U23287
Date: 05/10/16
Test Engineer: 38602
Configuration: EUT only
Mode: GPRS 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1850.2MHz)										
3.70	-62.7	H	3.0	-15.9	36.2	1.0	-51.2	-13.0	-38.2	
5.55	-62.0	H	3.0	-11.7	36.1	1.0	-46.8	-13.0	-33.8	
7.40	-62.8	H	3.0	-9.7	35.2	1.0	-43.9	-13.0	-30.9	
3.70	-62.1	V	3.0	-15.0	36.2	1.0	-50.2	-13.0	-37.2	
5.55	-62.8	V	3.0	-12.7	36.1	1.0	-47.8	-13.0	-34.8	
7.40	-63.0	V	3.0	-10.0	35.2	1.0	-44.2	-13.0	-31.2	
Mid Channel (1880.0)										
3.76	-62.5	H	3.0	-15.6	36.2	1.0	-50.8	-13.0	-37.8	
5.64	-62.4	H	3.0	-11.9	36.1	1.0	-47.0	-13.0	-34.0	
7.52	-64.0	H	3.0	-10.8	35.1	1.0	-44.9	-13.0	-31.9	
3.76	-61.6	V	3.0	-14.3	36.2	1.0	-49.5	-13.0	-36.5	
5.64	-63.0	V	3.0	-12.7	36.1	1.0	-47.8	-13.0	-34.8	
7.52	-63.7	V	3.0	-10.6	35.1	1.0	-44.7	-13.0	-31.7	
High Channel (1909.8MHz)										
3.82	-61.9	H	3.0	-14.9	36.1	1.0	-50.0	-13.0	-37.0	
5.73	-63.3	H	3.0	-12.7	36.1	1.0	-47.7	-13.0	-34.7	
7.54	-64.1	H	3.0	-10.9	35.1	1.0	-45.0	-13.0	-32.0	
3.82	-62.5	V	3.0	-15.0	36.1	1.0	-50.1	-13.0	-37.1	
5.73	-63.2	V	3.0	-12.8	36.1	1.0	-47.8	-13.0	-34.8	
7.54	-63.8	V	3.0	-10.7	35.1	1.0	-44.8	-13.0	-31.8	

Rev. 03.19.15

EGPRS, 1900MHz BAND 2

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 16U23287
Date: 05/10/16
Test Engineer: 38602
Configuration: EUT only
Mode: EGPRS 1900MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber G

Pre-amplifier

3m Chamber G

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1850.2MHz)										
3.70	-62.8	H	3.0	-16.0	36.2	1.0	-51.3	-13.0	-38.3	
5.55	-63.1	H	3.0	-12.8	36.1	1.0	-47.9	-13.0	-34.9	
7.40	-63.0	H	3.0	-9.9	35.2	1.0	-44.1	-13.0	-31.1	
3.70	-62.3	V	3.0	-15.2	36.2	1.0	-50.4	-13.0	-37.4	
5.55	-63.2	V	3.0	-13.1	36.1	1.0	-48.2	-13.0	-35.2	
7.40	-63.4	V	3.0	-10.4	35.2	1.0	-44.6	-13.0	-31.6	
Mid Channel (1880.0)										
3.76	-62.8	H	3.0	-15.9	36.2	1.0	-51.1	-13.0	-38.1	
5.64	-63.1	H	3.0	-12.6	36.1	1.0	-47.7	-13.0	-34.7	
7.52	-64.3	H	3.0	-11.1	35.1	1.0	-45.2	-13.0	-32.2	
3.76	-62.0	V	3.0	-14.7	36.2	1.0	-49.9	-13.0	-36.9	
5.64	-63.1	V	3.0	-12.8	36.1	1.0	-47.9	-13.0	-34.9	
7.52	-64.1	V	3.0	-11.0	35.1	1.0	-45.1	-13.0	-32.1	
High Channel (1909.8MHz)										
3.82	-62.2	H	3.0	-15.2	36.1	1.0	-50.3	-13.0	-37.3	
5.73	-64.0	H	3.0	-13.4	36.1	1.0	-48.4	-13.0	-35.4	
7.54	-64.6	H	3.0	-11.4	35.1	1.0	-45.5	-13.0	-32.5	
3.82	-62.2	V	3.0	-14.7	36.1	1.0	-49.8	-13.0	-36.8	
5.73	-63.6	V	3.0	-13.2	36.1	1.0	-48.2	-13.0	-35.2	
7.54	-64.2	V	3.0	-11.1	35.1	1.0	-45.2	-13.0	-32.2	

Rev. 03.19.15

10.4.2. CDMA2000

CDMA2000 1xRTT, 850MHz BC0

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 16U23287
Date: 05/12/16
Test Engineer: 38602
Configuration: EUT Only
Mode: 1xRTT 850MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber G

Pre-amplifier
 3m Chamber G

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.7MHz)										
1.65	-59.3	H	3.0	-17.8	37.8	1.0	-54.7	-13.0	-41.7	
2.47	-63.5	H	3.0	-20.4	36.6	1.0	-55.9	-13.0	-42.9	
3.30	-63.2	H	3.0	-17.3	36.5	1.0	-52.8	-13.0	-39.8	
1.65	-59.0	V	3.0	-17.2	37.8	1.0	-54.1	-13.0	-41.1	
2.47	-63.3	V	3.0	-19.3	36.6	1.0	-54.9	-13.0	-41.9	
3.30	-63.1	V	3.0	-17.2	36.5	1.0	-52.7	-13.0	-39.7	
Mid Channel (836.52MHz)										
1.67	-62.2	H	3.0	-20.7	37.8	1.0	-57.5	-13.0	-44.5	
2.51	-62.3	H	3.0	-19.1	36.4	1.0	-54.5	-13.0	-41.5	
3.35	-63.2	H	3.0	-17.2	36.5	1.0	-52.6	-13.0	-39.6	
1.67	-61.7	V	3.0	-19.9	37.8	1.0	-56.8	-13.0	-43.8	
2.51	-62.5	V	3.0	-18.3	36.4	1.0	-53.6	-13.0	-40.6	
3.35	-63.2	V	3.0	-17.1	36.5	1.0	-52.6	-13.0	-39.6	
High Channel (848.31MHz)										
1.70	-63.5	H	3.0	-22.0	37.8	1.0	-58.8	-13.0	-45.8	
2.54	-62.8	H	3.0	-19.5	36.4	1.0	-54.9	-13.0	-41.9	
3.39	-64.0	H	3.0	-17.9	36.4	1.0	-53.3	-13.0	-40.3	
1.70	-62.4	V	3.0	-20.6	37.8	1.0	-57.4	-13.0	-44.4	
2.54	-63.2	V	3.0	-18.9	36.4	1.0	-54.3	-13.0	-41.3	
3.39	-63.2	V	3.0	-17.0	36.4	1.0	-52.5	-13.0	-39.5	

Rev. 03.19.15

EVDO-Rev A, 850MHz BC0

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 16U23287
Date: 05/12/16
Test Engineer: 38602
Configuration: EUT only
Mode: Rev 0/A 850MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber G

Pre-amplifier
 3m Chamber G

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.7MHz)										
1.65	-57.6	H	3.0	-16.1	37.8	1.0	-53.0	-13.0	-40.0	
2.47	-63.6	H	3.0	-20.5	36.6	1.0	-56.0	-13.0	-43.0	
3.30	-62.8	H	3.0	-16.9	36.5	1.0	-52.4	-13.0	-39.4	
1.65	-58.2	V	3.0	-16.4	37.8	1.0	-53.3	-13.0	-40.3	
2.47	-63.4	V	3.0	-19.4	36.6	1.0	-55.0	-13.0	-42.0	
3.30	-63.1	V	3.0	-17.2	36.5	1.0	-52.7	-13.0	-39.7	
Mid Channel (836.52MHz)										
1.67	-62.0	H	3.0	-20.5	37.8	1.0	-57.3	-13.0	-44.3	
2.51	-63.8	H	3.0	-20.6	36.4	1.0	-56.0	-13.0	-43.0	
3.35	-63.7	H	3.0	-17.7	36.5	1.0	-53.1	-13.0	-40.1	
1.67	-63.6	V	3.0	-21.8	37.8	1.0	-58.7	-13.0	-45.7	
2.51	-63.3	V	3.0	-19.1	36.4	1.0	-54.4	-13.0	-41.4	
3.35	-63.2	V	3.0	-17.1	36.5	1.0	-52.6	-13.0	-39.6	
High Channel (848.31MHz)										
1.70	-63.3	H	3.0	-21.8	37.8	1.0	-58.6	-13.0	-45.6	
2.54	-62.8	H	3.0	-19.5	36.4	1.0	-54.9	-13.0	-41.9	
3.39	-63.6	H	3.0	-17.5	36.4	1.0	-52.9	-13.0	-39.9	
1.70	-63.7	V	3.0	-21.9	37.8	1.0	-58.7	-13.0	-45.7	
2.54	-63.6	V	3.0	-19.3	36.4	1.0	-54.7	-13.0	-41.7	
3.39	-63.6	V	3.0	-17.4	36.4	1.0	-52.9	-13.0	-39.9	

Rev. 03.19.15

CDMA2000 1xRTT, 1900MHz BC1

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 16U23287
Date: 05/12/16
Test Engineer: 38602
Configuration: EUT only
Mode: 1xRTT 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1851.25MHz)										
3.70	-62.0	H	3.0	-15.2	36.2	1.0	-50.5	-13.0	-37.5	
5.55	-62.6	H	3.0	-12.3	36.1	1.0	-47.4	-13.0	-34.4	
7.41	-63.1	H	3.0	-10.0	35.2	1.0	-44.2	-13.0	-31.2	
3.70	-61.9	V	3.0	-14.8	36.2	1.0	-50.0	-13.0	-37.0	
5.55	-62.5	V	3.0	-12.4	36.1	1.0	-47.5	-13.0	-34.5	
7.41	-63.4	V	3.0	-10.4	35.2	1.0	-44.6	-13.0	-31.6	
Mid Channel (1880MHz)										
3.76	-58.8	H	3.0	-11.9	36.2	1.0	-47.1	-13.0	-34.1	
5.64	-62.5	H	3.0	-12.0	36.1	1.0	-47.1	-13.0	-34.1	
7.52	-63.3	H	3.0	-10.1	35.1	1.0	-44.2	-13.0	-31.2	
3.76	-61.7	V	3.0	-14.4	36.2	1.0	-49.6	-13.0	-36.6	
5.64	-62.8	V	3.0	-12.5	36.1	1.0	-47.6	-13.0	-34.6	
7.52	-63.6	V	3.0	-10.5	35.1	1.0	-44.6	-13.0	-31.6	
High Channel (1908.75MHz)										
3.82	-61.2	H	3.0	-14.2	36.1	1.0	-49.3	-13.0	-36.3	
5.73	-63.3	H	3.0	-12.7	36.1	1.0	-47.7	-13.0	-34.7	
7.64	-63.4	H	3.0	-10.1	35.0	1.0	-44.1	-13.0	-31.1	
3.82	-60.1	V	3.0	-12.6	36.1	1.0	-47.7	-13.0	-34.7	
5.73	-63.4	V	3.0	-13.0	36.1	1.0	-48.0	-13.0	-35.0	
7.64	-63.1	V	3.0	-9.9	35.0	1.0	-43.9	-13.0	-30.9	

Rev. 03.19.15

EVDO-Rev A, 1900MHz BC1

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 16U23287
Date: 05/12/16
Test Engineer: 39005
Configuration: EUT only
Mode: Rev 0/A 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1851.25MHz)										
3.70	-60.1	H	3.0	-13.4	36.2	1.0	-48.6	-13.0	-35.6	
5.55	-62.1	H	3.0	-11.8	36.1	1.0	-46.9	-13.0	-33.9	
7.41	-63.2	H	3.0	-10.1	35.2	1.0	-44.3	-13.0	-31.3	
3.70	-61.7	V	3.0	-14.6	36.2	1.0	-49.8	-13.0	-36.8	
5.55	-61.7	V	3.0	-11.6	36.1	1.0	-46.7	-13.0	-33.7	
7.41	-62.6	V	3.0	-9.6	35.2	1.0	-43.8	-13.0	-30.8	
Mid Channel (1880MHz)										
3.76	-58.0	H	3.0	-11.1	36.2	1.0	-46.3	-13.0	-33.3	
5.64	-62.4	H	3.0	-12.0	36.1	1.0	-47.0	-13.0	-34.0	
7.52	-63.5	H	3.0	-10.3	35.1	1.0	-44.4	-13.0	-31.4	
3.76	-61.2	V	3.0	-13.9	36.2	1.0	-49.1	-13.0	-36.1	
5.64	-62.3	V	3.0	-12.0	36.1	1.0	-47.1	-13.0	-34.1	
7.52	-63.5	V	3.0	-10.4	35.1	1.0	-44.6	-13.0	-31.6	
High Channel (1908.75MHz)										
3.82	-59.2	H	3.0	-12.2	36.1	1.0	-47.4	-13.0	-34.4	
5.73	-63.1	H	3.0	-12.5	36.1	1.0	-47.5	-13.0	-34.5	
7.64	-63.2	H	3.0	-9.9	35.0	1.0	-44.0	-13.0	-31.0	
3.82	-61.1	V	3.0	-13.6	36.1	1.0	-48.7	-13.0	-35.7	
5.73	-62.5	V	3.0	-12.1	36.1	1.0	-47.1	-13.0	-34.1	
7.64	-63.5	V	3.0	-10.2	35.0	1.0	-44.3	-13.0	-31.3	

Rev. 03.19.15

CDMA2000 1xRTT, 800MHz BC10

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 16U23287
Date: 05/12/16
Test Engineer: 38602
Configuration: EUT only
Mode: 1xRTT 800MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (817.25MHz)										
1.63	-56.5	H	3.0	-15.1	37.8	1.0	-51.9	-13.0	-38.9	
2.45	-62.6	H	3.0	-19.5	36.7	1.0	-55.2	-13.0	-42.2	
3.27	-63.3	H	3.0	-17.4	36.5	1.0	-53.0	-13.0	-40.0	
1.63	-56.0	V	3.0	-14.2	37.8	1.0	-51.1	-13.0	-38.1	
2.45	-62.3	V	3.0	-18.4	36.7	1.0	-54.2	-13.0	-41.2	
3.27	-63.0	V	3.0	-17.2	36.5	1.0	-52.7	-13.0	-39.7	
Mid Channel (820MHz)										
1.64	-61.2	H	3.0	-19.8	37.8	1.0	-56.6	-13.0	-43.6	
2.46	-63.6	H	3.0	-20.5	36.7	1.0	-56.1	-13.0	-43.1	
3.28	-63.4	H	3.0	-17.5	36.5	1.0	-53.0	-13.0	-40.0	
1.64	-59.5	V	3.0	-17.7	37.8	1.0	-54.6	-13.0	-41.6	
2.46	-63.6	V	3.0	-19.7	36.7	1.0	-55.3	-13.0	-42.3	
3.28	-63.4	V	3.0	-17.6	36.5	1.0	-53.1	-13.0	-40.1	
High Channel (822.75MHz)										
1.65	-59.2	H	3.0	-17.7	37.8	1.0	-54.6	-13.0	-41.6	
2.47	-63.4	H	3.0	-20.3	36.6	1.0	-55.8	-13.0	-42.8	
3.20	-63.2	H	3.0	-17.5	36.6	1.0	-53.1	-13.0	-40.1	
1.65	-58.2	V	3.0	-16.4	37.8	1.0	-53.3	-13.0	-40.3	
2.47	-63.6	V	3.0	-19.6	36.6	1.0	-55.2	-13.0	-42.2	
3.20	-63.1	V	3.0	-17.5	36.6	1.0	-53.1	-13.0	-40.1	

Rev. 03.19.15

EVDO-Rev A, 800MHz BC10

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: 16U23287 Date: 05/13/16 Test Engineer: 39005 Configuration: EUT only Mode: Rev 0/A, 800MHz										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber G		3m Chamber G		Filter		EIRP				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (817.25MHz)										
1.63	-63.6	H	3.0	-22.2	37.8	1.0	-59.1	-13.0	-46.1	
2.45	-63.8	H	3.0	-20.7	36.7	1.0	-56.4	-13.0	-43.4	
3.27	-64.0	H	3.0	-18.2	36.5	1.0	-53.7	-13.0	-40.7	
1.63	-62.4	V	3.0	-20.6	37.8	1.0	-57.5	-13.0	-44.5	
2.45	-63.1	V	3.0	-19.2	36.7	1.0	-55.0	-13.0	-42.0	
3.27	-63.9	V	3.0	-18.1	36.5	1.0	-53.7	-13.0	-40.7	
Mid Channel (820MHz)										
1.64	-63.5	H	3.0	-22.1	37.8	1.0	-58.9	-13.0	-45.9	
2.46	-63.6	H	3.0	-20.4	36.7	1.0	-56.1	-13.0	-43.1	
3.28	-64.0	H	3.0	-18.1	36.5	1.0	-53.7	-13.0	-40.7	
1.64	-62.7	V	3.0	-21.0	37.8	1.0	-57.8	-13.0	-44.8	
2.46	-62.9	V	3.0	-18.9	36.7	1.0	-54.6	-13.0	-41.6	
3.28	-63.3	V	3.0	-17.5	36.5	1.0	-53.0	-13.0	-40.0	
High Channel (822.75MHz)										
1.65	-63.6	H	3.0	-22.1	37.8	1.0	-59.0	-13.0	-46.0	
2.47	-63.1	H	3.0	-20.0	36.6	1.0	-55.5	-13.0	-42.5	
3.29	-63.5	H	3.0	-17.6	36.5	1.0	-53.1	-13.0	-40.1	
1.65	-62.4	V	3.0	-20.6	37.8	1.0	-57.4	-13.0	-44.4	
2.47	-63.6	V	3.0	-19.5	36.6	1.0	-55.1	-13.0	-42.1	
3.29	-63.9	V	3.0	-18.0	36.5	1.0	-53.6	-13.0	-40.6	
Rev. 03.19.15										

10.4.3. UMTS

UMTS REL 99, 850MHz BAND 5

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 15U22288
Date: 02/18/16
Test Engineer: 37290
Configuration: EUT Only
Mode: REL 99, 850MHz

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber F

Pre-amplifier
 3m Chamber F

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (826.4MHz)										
1.65	-64.5	H	3.0	-23.3	33.7	1.0	-56.0	-13.0	-43.0	
2.48	-67.8	H	3.0	-23.7	34.1	1.0	-56.8	-13.0	-43.8	
3.31	-68.8	H	3.0	-20.6	34.7	1.0	-54.2	-13.0	-41.2	
1.65	-59.5	V	3.0	-16.1	33.7	1.0	-48.8	-13.0	-35.8	
2.48	-68.3	V	3.0	-23.5	34.1	1.0	-56.6	-13.0	-43.6	
3.31	-68.3	V	3.0	-19.8	34.7	1.0	-53.4	-13.0	-40.4	
Mid Channel (836.6MHz)										
1.67	-65.6	H	3.0	-24.3	33.7	1.0	-56.9	-13.0	-43.9	
2.51	-68.3	H	3.0	-24.1	34.1	1.0	-57.2	-13.0	-44.2	
3.35	-69.1	H	3.0	-20.7	34.6	1.0	-54.3	-13.0	-41.3	
1.67	-58.2	V	3.0	-14.8	33.7	1.0	-47.5	-13.0	-34.5	
2.51	-67.6	V	3.0	-22.8	34.1	1.0	-55.9	-13.0	-42.9	
3.35	-68.2	V	3.0	-19.6	34.6	1.0	-53.2	-13.0	-40.2	
High Channel (846.6MHz)										
1.69	-61.4	H	3.0	-20.0	33.7	1.0	-52.6	-13.0	-39.6	
2.54	-68.3	H	3.0	-23.9	34.1	1.0	-57.0	-13.0	-44.0	
3.39	-68.2	H	3.0	-19.6	34.6	1.0	-53.2	-13.0	-40.2	
1.69	-56.5	V	3.0	-13.1	33.7	1.0	-45.8	-13.0	-32.8	
2.54	-67.8	V	3.0	-22.8	34.1	1.0	-56.0	-13.0	-43.0	
3.39	-68.4	V	3.0	-19.6	34.6	1.0	-53.2	-13.0	-40.2	

Rev. 03.19.15

UMTS HSDPA, 850MHz BAND 5

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 15U22288
Date: 02/18/16
Test Engineer: 37290
Configuration: EUT Only
Mode: HSDPA 850MHz

Test Equipment:
 Substitution: Horn T69 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber F

Pre-amplifier
 3m Chamber F

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (826.4MHz)										
1.65	-65.7	H	3.0	-24.5	33.7	1.0	-57.2	-13.0	-44.2	
2.48	-67.8	H	3.0	-23.7	34.1	1.0	-56.8	-13.0	-43.8	
3.31	-68.6	H	3.0	-20.3	34.7	1.0	-54.0	-13.0	-41.0	
1.65	-59.3	V	3.0	-15.9	33.7	1.0	-48.6	-13.0	-35.6	
2.48	-67.3	V	3.0	-22.5	34.1	1.0	-55.6	-13.0	-42.6	
3.31	-68.3	V	3.0	-19.8	34.7	1.0	-53.5	-13.0	-40.5	
Mid Channel (836.6MHz)										
1.67	-65.3	H	3.0	-24.0	33.7	1.0	-56.7	-13.0	-43.7	
2.51	-67.7	H	3.0	-23.5	34.1	1.0	-56.6	-13.0	-43.6	
3.35	-67.7	H	3.0	-19.3	34.6	1.0	-52.9	-13.0	-39.9	
1.67	-58.1	V	3.0	-14.7	33.7	1.0	-47.4	-13.0	-34.4	
2.51	-68.3	V	3.0	-23.5	34.1	1.0	-56.6	-13.0	-43.6	
3.35	-68.4	V	3.0	-19.8	34.6	1.0	-53.4	-13.0	-40.4	
High Channel (846.6MHz)										
1.69	-63.0	H	3.0	-21.5	33.7	1.0	-54.2	-13.0	-41.2	
2.54	-68.2	H	3.0	-23.8	34.1	1.0	-56.9	-13.0	-43.9	
3.39	-68.2	H	3.0	-19.7	34.6	1.0	-53.3	-13.0	-40.3	
1.69	-57.1	V	3.0	-13.7	33.7	1.0	-46.4	-13.0	-33.4	
2.54	-67.6	V	3.0	-22.7	34.1	1.0	-55.8	-13.0	-42.8	
3.39	-68.3	V	3.0	-19.5	34.6	1.0	-53.1	-13.0	-40.1	

Rev. 03.19.15

UMTS REL 99, 1900MHz BAND 2

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 15U22288
Date: 02/18/16
Test Engineer: 39472
Configuration: EUT Only
Mode: REL 99, 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1852.4MHz)										
3.70	-66.5	H	3.0	-16.7	34.4	1.0	-50.2	-13.0	-37.2	
5.56	-69.5	H	3.0	-16.0	34.1	1.0	-49.1	-13.0	-36.1	
7.41	-71.8	H	3.0	-15.5	33.6	1.0	-48.1	-13.0	-35.1	
3.70	-68.4	V	3.0	-18.5	34.4	1.0	-52.0	-13.0	-39.0	
5.55	-66.5	V	3.0	-12.9	34.1	1.0	-46.0	-13.0	-33.0	
7.42	-71.4	V	3.0	-15.2	33.6	1.0	-47.8	-13.0	-34.8	
Mid Channel (1880MHz)										
3.76	-67.3	H	3.0	-17.3	34.4	1.0	-50.7	-13.0	-37.7	
5.64	-70.0	H	3.0	-16.4	34.1	1.0	-49.5	-13.0	-36.5	
7.52	-70.5	H	3.0	-14.1	33.5	1.0	-46.6	-13.0	-33.6	
3.76	-69.0	V	3.0	-19.0	34.4	1.0	-52.4	-13.0	-39.4	
5.64	-69.4	V	3.0	-15.7	34.1	1.0	-48.8	-13.0	-35.8	
7.52	-70.8	V	3.0	-14.5	33.5	1.0	-47.1	-13.0	-34.1	
High Channel (1907.6MHz)										
3.81	-68.4	H	3.0	-18.2	34.4	1.0	-51.6	-13.0	-38.6	
5.72	-71.2	H	3.0	-17.5	34.1	1.0	-50.6	-13.0	-37.6	
7.66	-71.5	H	3.0	-14.9	33.4	1.0	-47.3	-13.0	-34.3	
3.82	-68.3	V	3.0	-18.0	34.4	1.0	-51.4	-13.0	-38.4	
5.72	-71.2	V	3.0	-17.3	34.1	1.0	-50.4	-13.0	-37.4	
7.63	-71.1	V	3.0	-14.7	33.4	1.0	-47.1	-13.0	-34.1	

Rev. 03.19.15

UMTS HSDPA, 1900MHz BAND 2

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 15U22288
Date: 02/18/16
Test Engineer: 43579
Configuration: EUT Only
Mode: HSDPA 1900MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber F

Pre-amplifier

3m Chamber F

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1852.4MHz)										
3.70	-68.8	H	3.0	-19.1	34.4	1.0	-52.5	-13.0	-39.5	
5.56	-67.8	H	3.0	-14.4	34.1	1.0	-47.5	-13.0	-34.5	
7.41	-68.5	H	3.0	-12.2	33.6	1.0	-44.8	-13.0	-31.8	
9.26	-68.8	H	3.0	-10.0	32.2	1.0	-41.2	-13.0	-28.2	
3.70	-70.0	V	3.0	-20.1	34.4	1.0	-53.6	-13.0	-40.6	
5.56	-67.0	V	3.0	-13.3	34.1	1.0	-46.5	-13.0	-33.5	
7.41	-67.8	V	3.0	-11.6	33.6	1.0	-44.2	-13.0	-31.2	
9.26	-68.9	V	3.0	-10.2	32.2	1.0	-41.4	-13.0	-28.4	
Mid Channel (1880MHz)										
3.76	-69.3	H	3.0	-19.3	34.4	1.0	-52.8	-13.0	-39.8	
5.64	-68.3	H	3.0	-14.7	34.1	1.0	-47.8	-13.0	-34.8	
7.52	-68.2	H	3.0	-11.7	33.5	1.0	-44.3	-13.0	-31.3	
9.40	-69.8	H	3.0	-10.8	32.1	1.0	-41.9	-13.0	-28.9	
3.76	-69.8	V	3.0	-19.8	34.4	1.0	-53.2	-13.0	-40.2	
5.64	-67.1	V	3.0	-13.3	34.1	1.0	-46.4	-13.0	-33.4	
7.52	-68.7	V	3.0	-12.4	33.5	1.0	-44.9	-13.0	-31.9	
9.40	-69.6	V	3.0	-10.7	32.1	1.0	-41.8	-13.0	-28.8	
High Channel (1907.6MHz)										
3.82	-69.6	H	3.0	-19.4	34.4	1.0	-52.8	-13.0	-39.8	
5.72	-69.0	H	3.0	-15.3	34.1	1.0	-48.4	-13.0	-35.4	
7.63	-68.5	H	3.0	-11.9	33.4	1.0	-44.3	-13.0	-31.3	
9.54	-69.3	H	3.0	-10.1	32.0	1.0	-41.0	-13.0	-28.0	
3.82	-69.8	V	3.0	-19.5	34.4	1.0	-52.9	-13.0	-39.9	
5.72	-68.5	V	3.0	-14.7	34.1	1.0	-47.8	-13.0	-34.8	
7.63	-68.5	V	3.0	-12.0	33.4	1.0	-44.5	-13.0	-31.5	
9.54	-70.0	V	3.0	-10.9	32.0	1.0	-41.9	-13.0	-28.9	

Rev. 03.19.15

UMTS REL 99, 1700MHz BAND 4

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 15U22288
Date: 02/18/16
Test Engineer: 43579
Configuration: EUT Only
Mode: REL 99, 1700MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1712.4MHz)										
3.42	-71.2	H	3.0	-22.5	34.6	1.0	-56.1	-13.0	-43.1	
5.14	-70.7	H	3.0	-17.9	34.2	1.0	-51.1	-13.0	-38.1	
6.85	-70.3	H	3.0	-14.8	33.9	1.0	-47.7	-13.0	-34.7	
8.56	-70.6	H	3.0	-12.7	32.7	1.0	-44.5	-13.0	-31.5	
3.42	-71.2	V	3.0	-22.3	34.6	1.0	-55.9	-13.0	-42.9	
5.14	-70.8	V	3.0	-17.8	34.2	1.0	-50.9	-13.0	-37.9	
6.85	-70.4	V	3.0	-15.0	33.9	1.0	-48.0	-13.0	-35.0	
8.56	-70.3	V	3.0	-12.6	32.7	1.0	-44.3	-13.0	-31.3	
Mid Channel (1732.6MHz)										
3.47	-72.5	H	3.0	-23.7	34.6	1.0	-57.2	-13.0	-44.2	
5.20	-70.5	H	3.0	-17.7	34.2	1.0	-50.8	-13.0	-37.8	
6.93	-69.4	H	3.0	-13.7	33.9	1.0	-46.6	-13.0	-33.6	
8.66	-70.8	H	3.0	-12.8	32.6	1.0	-44.4	-13.0	-31.4	
3.47	-71.3	V	3.0	-22.2	34.6	1.0	-55.8	-13.0	-42.8	
5.20	-70.0	V	3.0	-16.8	34.2	1.0	-50.0	-13.0	-37.0	
6.93	-70.2	V	3.0	-14.7	33.9	1.0	-47.7	-13.0	-34.7	
8.66	-70.7	V	3.0	-12.9	32.6	1.0	-44.5	-13.0	-31.5	
High Channel (1752.6MHz)										
3.51	-72.0	H	3.0	-23.0	34.5	1.0	-56.5	-13.0	-43.5	
5.26	-69.9	H	3.0	-16.9	34.2	1.0	-50.1	-13.0	-37.1	
7.01	-70.8	H	3.0	-15.0	33.9	1.0	-47.9	-13.0	-34.9	
8.76	-71.3	H	3.0	-13.2	32.6	1.0	-44.8	-13.0	-31.8	
3.51	-71.6	V	3.0	-22.4	34.5	1.0	-55.9	-13.0	-42.9	
5.26	-70.3	V	3.0	-17.0	34.2	1.0	-50.2	-13.0	-37.2	
7.01	-70.5	V	3.0	-14.9	33.9	1.0	-47.8	-13.0	-34.8	
8.76	-70.5	V	3.0	-12.4	32.6	1.0	-44.0	-13.0	-31.0	

Rev. 03.19.15

UMTS HSDPA, 1700MHz BAND 4

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 15U22288
Date: 02/18/16
Test Engineer: 43579
Configuration: EUT Only
Mode: HSDPA 1700MHz

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1712.4MHz)										
3.42	-69.2	H	3.0	-20.5	34.6	1.0	-54.1	-13.0	-41.1	
5.14	-68.4	H	3.0	-15.6	34.2	1.0	-48.8	-13.0	-35.8	
6.85	-66.8	H	3.0	-11.3	33.9	1.0	-44.2	-13.0	-31.2	
8.56	-68.5	H	3.0	-10.7	32.7	1.0	-42.4	-13.0	-29.4	
3.42	-69.1	V	3.0	-20.2	34.6	1.0	-53.8	-13.0	-40.8	
5.14	-68.5	V	3.0	-15.4	34.2	1.0	-48.6	-13.0	-35.6	
6.85	-67.4	V	3.0	-12.0	33.9	1.0	-44.9	-13.0	-31.9	
8.56	-68.2	V	3.0	-10.5	32.7	1.0	-42.2	-13.0	-29.2	
Mid Channel (1732.6MHz)										
3.47	-70.8	H	3.0	-22.0	34.6	1.0	-55.5	-13.0	-42.5	
5.20	-71.0	H	3.0	-18.1	34.2	1.0	-51.3	-13.0	-38.3	
6.93	-69.7	H	3.0	-14.0	33.9	1.0	-47.0	-13.0	-34.0	
8.66	-70.8	H	3.0	-12.8	32.6	1.0	-44.4	-13.0	-31.4	
3.47	-69.6	V	3.0	-20.5	34.6	1.0	-54.1	-13.0	-41.1	
5.20	-69.0	V	3.0	-15.9	34.2	1.0	-49.0	-13.0	-36.0	
6.93	-67.3	V	3.0	-11.9	33.9	1.0	-44.8	-13.0	-31.8	
8.66	-69.0	V	3.0	-11.1	32.6	1.0	-42.7	-13.0	-29.7	
High Channel (1752.6MHz)										
3.51	-71.1	H	3.0	-22.0	34.5	1.0	-55.6	-13.0	-42.6	
5.26	-70.3	H	3.0	-17.3	34.2	1.0	-50.5	-13.0	-37.5	
7.01	-70.4	H	3.0	-14.6	33.9	1.0	-47.5	-13.0	-34.5	
8.76	-71.3	H	3.0	-13.2	32.6	1.0	-44.8	-13.0	-31.8	
3.51	-72.2	V	3.0	-23.0	34.5	1.0	-56.6	-13.0	-43.6	
5.26	-70.5	V	3.0	-17.3	34.2	1.0	-50.4	-13.0	-37.4	
7.01	-70.1	V	3.0	-14.5	33.9	1.0	-47.4	-13.0	-34.4	
8.76	-70.5	V	3.0	-12.5	32.6	1.0	-44.1	-13.0	-31.1	

Rev. 03.19.15

10.5. FIELD STRENGTH OF SPURIOUS RADIATION (UAT)

10.5.1. GSM

GPRS, 850MHz BAND 5

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: 16U23287 Date: 05/10/16 Test Engineer: 38602 Configuration: EUT Only Mode: GPRS 850MHz										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber Pre-amplifier Filter Limit 3m Chamber G 3m Chamber G Filter EIRP										
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.2MHz)										
1.65	-57.6	H	3.0	-16.1	37.8	1.0	-52.9	-13.0	-39.9	
2.47	-61.2	H	3.0	-18.1	36.6	1.0	-53.7	-13.0	-40.7	
3.30	-61.4	H	3.0	-15.5	36.5	1.0	-51.0	-13.0	-38.0	
4.12	-61.1	H	3.0	-13.5	36.0	1.0	-48.6	-13.0	-35.6	
1.65	-61.2	V	3.0	-19.4	37.8	1.0	-56.2	-13.0	-43.2	
2.47	-58.6	V	3.0	-14.5	36.6	1.0	-50.1	-13.0	-37.1	
3.30	-61.9	V	3.0	-16.0	36.5	1.0	-51.5	-13.0	-38.5	
4.12	-62.4	V	3.0	-14.2	36.0	1.0	-49.2	-13.0	-36.2	
Mid Channel (836.6MHz)										
1.67	-57.7	H	3.0	-16.3	37.8	1.0	-53.1	-13.0	-40.1	
2.51	-61.4	H	3.0	-18.2	36.4	1.0	-53.6	-13.0	-40.6	
3.35	-61.9	H	3.0	-15.9	36.5	1.0	-51.4	-13.0	-38.4	
4.18	-62.4	H	3.0	-14.6	36.0	1.0	-49.7	-13.0	-36.7	
1.67	-61.4	V	3.0	-19.6	37.8	1.0	-56.5	-13.0	-43.5	
2.51	-59.9	V	3.0	-15.6	36.4	1.0	-51.0	-13.0	-38.0	
3.35	-62.6	V	3.0	-16.6	36.5	1.0	-52.1	-13.0	-39.1	
4.18	-63.0	V	3.0	-14.7	36.0	1.0	-49.8	-13.0	-36.8	
High Channel (848.8MHz)										
1.70	-58.1	H	3.0	-16.5	37.8	1.0	-53.3	-13.0	-40.3	
2.55	-60.1	H	3.0	-16.7	36.4	1.0	-52.1	-13.0	-39.1	
3.40	-60.3	H	3.0	-14.1	36.4	1.0	-49.6	-13.0	-36.6	
4.24	-61.1	H	3.0	-13.3	36.1	1.0	-48.4	-13.0	-35.4	
1.70	-60.6	V	3.0	-18.8	37.8	1.0	-55.6	-13.0	-42.6	
2.55	-59.7	V	3.0	-15.4	36.4	1.0	-50.8	-13.0	-37.8	
3.40	-61.0	V	3.0	-14.8	36.4	1.0	-50.3	-13.0	-37.3	
4.24	-62.0	V	3.0	-13.7	36.1	1.0	-48.7	-13.0	-35.7	
Rev. 03.19.15										

EGPRS, 850MHz BAND 5

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 16U23287
Date: 05/10/16
Test Engineer: 38602
Configuration: EUT Only
Mode: EGPRS 850MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber G

Pre-amplifier
 3m Chamber G

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.2MHz)										
1.65	-62.8	H	3.0	-21.3	37.8	1.0	-58.2	-13.0	-45.2	
2.47	-60.7	H	3.0	-17.5	36.6	1.0	-53.1	-13.0	-40.1	
3.30	-59.6	H	3.0	-13.7	36.5	1.0	-49.2	-13.0	-36.2	
4.12	-59.7	H	3.0	-12.1	36.0	1.0	-47.1	-13.0	-34.1	
1.65	-63.2	V	3.0	-21.4	37.8	1.0	-58.2	-13.0	-45.2	
2.47	-60.9	V	3.0	-16.8	36.6	1.0	-52.4	-13.0	-39.4	
3.30	-60.0	V	3.0	-14.1	36.5	1.0	-49.6	-13.0	-36.6	
4.12	-58.9	V	3.0	-10.7	36.0	1.0	-45.7	-13.0	-32.7	
Mid Channel (836.6MHz)										
1.67	-63.2	H	3.0	-21.7	37.8	1.0	-58.5	-13.0	-45.5	
2.51	-59.9	H	3.0	-16.7	36.4	1.0	-52.1	-13.0	-39.1	
3.35	-60.1	H	3.0	-14.1	36.5	1.0	-49.6	-13.0	-36.6	
4.18	-59.9	H	3.0	-12.2	36.0	1.0	-47.3	-13.0	-34.3	
1.67	-63.0	V	3.0	-21.2	37.8	1.0	-58.1	-13.0	-45.1	
2.51	-61.7	V	3.0	-17.5	36.4	1.0	-52.8	-13.0	-39.8	
3.35	-59.9	V	3.0	-13.8	36.5	1.0	-49.3	-13.0	-36.3	
4.18	-61.1	V	3.0	-12.8	36.0	1.0	-47.8	-13.0	-34.8	
High Channel (848.8MHz)										
1.70	-62.5	H	3.0	-20.9	37.8	1.0	-57.7	-13.0	-44.7	
2.55	-60.0	H	3.0	-16.6	36.4	1.0	-52.0	-13.0	-39.0	
3.40	-59.7	H	3.0	-13.5	36.4	1.0	-49.0	-13.0	-36.0	
4.24	-59.1	H	3.0	-11.3	36.1	1.0	-46.3	-13.0	-33.3	
1.70	-63.9	V	3.0	-22.1	37.8	1.0	-58.9	-13.0	-45.9	
2.55	-60.3	V	3.0	-16.0	36.4	1.0	-51.4	-13.0	-38.4	
3.40	-60.5	V	3.0	-14.3	36.4	1.0	-49.7	-13.0	-36.7	
4.24	-59.8	V	3.0	-11.4	36.1	1.0	-46.5	-13.0	-33.5	

Rev. 03.19.15

GPRS, 1900MHz BAND 2

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 16U23287
Date: 05/10/16
Test Engineer: 38602
Configuration: EUT Only
Mode: GPRS 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1850.2MHz)										
3.70	-62.5	H	3.0	-15.7	36.2	1.0	-51.0	-13.0	-38.0	
5.55	-62.9	H	3.0	-12.6	36.1	1.0	-47.7	-13.0	-34.7	
7.40	-63.0	H	3.0	-9.9	35.2	1.0	-44.1	-13.0	-31.1	
3.70	-61.8	V	3.0	-14.7	36.2	1.0	-49.9	-13.0	-36.9	
5.55	-63.0	V	3.0	-12.9	36.1	1.0	-48.0	-13.0	-35.0	
7.40	-63.0	V	3.0	-10.0	35.2	1.0	-44.2	-13.0	-31.2	
Mid Channel (1880.0)										
3.76	-62.8	H	3.0	-15.9	36.2	1.0	-51.1	-13.0	-38.1	
5.64	-63.1	H	3.0	-12.6	36.1	1.0	-47.7	-13.0	-34.7	
7.52	-63.7	H	3.0	-10.5	35.1	1.0	-44.6	-13.0	-31.6	
3.76	-62.6	V	3.0	-15.3	36.2	1.0	-50.5	-13.0	-37.5	
5.64	-63.5	V	3.0	-13.2	36.1	1.0	-48.3	-13.0	-35.3	
7.52	-63.7	V	3.0	-10.6	35.1	1.0	-44.7	-13.0	-31.7	
High Channel (1909.8MHz)										
3.82	-62.5	H	3.0	-15.5	36.1	1.0	-50.6	-13.0	-37.6	
5.73	-63.0	H	3.0	-12.4	36.1	1.0	-47.4	-13.0	-34.4	
7.64	-63.9	H	3.0	-10.6	35.0	1.0	-44.6	-13.0	-31.6	
3.82	-62.4	V	3.0	-14.9	36.1	1.0	-50.0	-13.0	-37.0	
5.73	-63.3	V	3.0	-12.9	36.1	1.0	-47.9	-13.0	-34.9	
7.64	-63.3	V	3.0	-10.1	35.0	1.0	-44.1	-13.0	-31.1	

Rev. 03.19.15

EGPRS, 1900MHz BAND 2

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: 16U23287 Date: 05/10/16 Test Engineer: 38602 Configuration: EUT Only Mode: EGPRS 1900MHz										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber G		3m Chamber G		Filter		EIRP				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1850.2MHz)										
3.70	-62.5	H	3.0	-15.7	36.2	1.0	-51.0	-13.0	-38.0	
5.55	-62.4	H	3.0	-12.1	36.1	1.0	-47.2	-13.0	-34.2	
7.40	-63.1	H	3.0	-10.0	35.2	1.0	-44.2	-13.0	-31.2	
3.70	-62.5	V	3.0	-15.4	36.2	1.0	-50.6	-13.0	-37.6	
5.55	-63.2	V	3.0	-13.1	36.1	1.0	-48.2	-13.0	-35.2	
7.40	-64.0	V	3.0	-11.0	35.2	1.0	-45.2	-13.0	-32.2	
Mid Channel (1880.0)										
3.76	-62.6	H	3.0	-15.7	36.2	1.0	-50.9	-13.0	-37.9	
5.64	-63.5	H	3.0	-13.0	36.1	1.0	-48.1	-13.0	-35.1	
7.52	-64.1	H	3.0	-10.9	35.1	1.0	-45.0	-13.0	-32.0	
3.76	-62.4	V	3.0	-15.1	36.2	1.0	-50.3	-13.0	-37.3	
5.64	-63.5	V	3.0	-13.2	36.1	1.0	-48.3	-13.0	-35.3	
7.52	-64.0	V	3.0	-10.9	35.1	1.0	-45.0	-13.0	-32.0	
High Channel (1909.8MHz)										
3.82	-62.3	H	3.0	-15.3	36.1	1.0	-50.4	-13.0	-37.4	
5.73	-62.8	H	3.0	-12.2	36.1	1.0	-47.2	-13.0	-34.2	
7.64	-63.9	H	3.0	-10.6	35.0	1.0	-44.6	-13.0	-31.6	
3.82	-62.4	V	3.0	-14.9	36.1	1.0	-50.0	-13.0	-37.0	
5.73	-63.6	V	3.0	-13.2	36.1	1.0	-48.2	-13.0	-35.2	
7.64	-63.8	V	3.0	-10.6	35.0	1.0	-44.6	-13.0	-31.6	
Rev. 03.19.15										

10.5.2. CDMA2000

CDMA2000 1xRTT, 850MHz BC0

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 16U23287
Date: 05/12/16
Test Engineer: 39005
Configuration: EUT Only
Mode: 1xRTT 850MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber G

Pre-amplifier
 3m Chamber G

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.7MHz)										
1.65	-59.2	H	3.0	-17.7	37.8	1.0	-54.6	-13.0	-41.6	
2.47	-62.4	H	3.0	-19.2	36.6	1.0	-54.8	-13.0	-41.8	
3.30	-62.6	H	3.0	-16.7	36.5	1.0	-52.2	-13.0	-39.2	
1.65	-58.1	V	3.0	-16.3	37.8	1.0	-53.2	-13.0	-40.2	
2.47	-62.4	V	3.0	-18.4	36.6	1.0	-53.9	-13.0	-40.9	
3.30	-62.3	V	3.0	-16.4	36.5	1.0	-51.9	-13.0	-38.9	
Mid Channel (836.52MHz)										
1.67	-61.2	H	3.0	-19.7	37.8	1.0	-56.6	-13.0	-43.6	
2.51	-62.5	H	3.0	-19.3	36.4	1.0	-54.7	-13.0	-41.7	
3.35	-62.7	H	3.0	-16.6	36.5	1.0	-52.1	-13.0	-39.1	
1.67	-61.5	V	3.0	-19.7	37.8	1.0	-56.5	-13.0	-43.5	
2.51	-62.7	V	3.0	-18.5	36.4	1.0	-53.9	-13.0	-40.9	
3.35	-62.8	V	3.0	-16.7	36.5	1.0	-52.2	-13.0	-39.2	
High Channel (848.31MHz)										
1.70	-63.2	H	3.0	-21.7	37.8	1.0	-58.5	-13.0	-45.5	
2.54	-62.4	H	3.0	-19.1	36.4	1.0	-54.5	-13.0	-41.5	
3.39	-62.9	H	3.0	-16.8	36.4	1.0	-52.3	-13.0	-39.3	
1.70	-62.7	V	3.0	-20.9	37.8	1.0	-57.7	-13.0	-44.7	
2.54	-62.8	V	3.0	-18.5	36.4	1.0	-53.9	-13.0	-40.9	
3.39	-62.7	V	3.0	-16.5	36.4	1.0	-52.0	-13.0	-39.0	

Rev. 03.19.15

EVDO-Rev A, 850MHz BC0

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 16U23287
Date: 05/12/16
Test Engineer: 39005
Configuration: EUT Only
Mode: Rev 0/A 850MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber G

Pre-amplifier
 3m Chamber G

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (824.7MHz)										
1.65	-59.5	H	3.0	-18.1	37.8	1.0	-54.9	-13.0	-41.9	
2.47	-62.8	H	3.0	-19.6	36.6	1.0	-55.2	-13.0	-42.2	
3.30	-63.0	H	3.0	-17.0	36.5	1.0	-52.5	-13.0	-39.5	
1.65	-58.9	V	3.0	-17.2	37.8	1.0	-54.0	-13.0	-41.0	
2.47	-62.4	V	3.0	-18.4	36.6	1.0	-53.9	-13.0	-40.9	
3.30	-62.3	V	3.0	-16.4	36.5	1.0	-51.9	-13.0	-38.9	
Mid Channel (836.52MHz)										
1.67	-61.7	H	3.0	-20.2	37.8	1.0	-57.0	-13.0	-44.0	
2.51	-62.5	H	3.0	-19.3	36.4	1.0	-54.7	-13.0	-41.7	
3.35	-62.8	H	3.0	-16.8	36.5	1.0	-52.3	-13.0	-39.3	
1.67	-62.6	V	3.0	-20.8	37.8	1.0	-57.6	-13.0	-44.6	
2.51	-62.9	V	3.0	-18.7	36.4	1.0	-54.1	-13.0	-41.1	
3.35	-62.9	V	3.0	-16.8	36.5	1.0	-52.3	-13.0	-39.3	
High Channel (848.31MHz)										
1.70	-62.9	H	3.0	-21.3	37.8	1.0	-58.2	-13.0	-45.2	
2.54	-62.7	H	3.0	-19.4	36.4	1.0	-54.8	-13.0	-41.8	
3.39	-62.5	H	3.0	-16.4	36.4	1.0	-51.8	-13.0	-38.8	
1.70	-63.0	V	3.0	-21.2	37.8	1.0	-58.1	-13.0	-45.1	
2.54	-62.9	V	3.0	-18.6	36.4	1.0	-54.0	-13.0	-41.0	
3.39	-62.6	V	3.0	-16.5	36.4	1.0	-51.9	-13.0	-38.9	

Rev. 03.19.15

CDMA2000 1xRTT, 1900MHz BC1

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 16U23287
Date: 05/12/16
Test Engineer: 39005
Configuration: EUT Only
Mode: 1xRTT 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber G	3m Chamber G	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1851.25MHz)										
3.70	-61.8	H	3.0	-15.1	36.2	1.0	-50.3	-13.0	-37.3	
5.55	-62.0	H	3.0	-11.7	36.1	1.0	-46.8	-13.0	-33.8	
7.41	-63.1	H	3.0	-10.0	35.2	1.0	-44.2	-13.0	-31.2	
3.70	-61.5	V	3.0	-14.4	36.2	1.0	-49.6	-13.0	-36.6	
5.55	-62.4	V	3.0	-12.3	36.1	1.0	-47.4	-13.0	-34.4	
7.41	-63.1	V	3.0	-10.1	35.2	1.0	-44.3	-13.0	-31.3	
Mid Channel (1880MHz)										
3.76	-61.3	H	3.0	-14.5	36.2	1.0	-49.6	-13.0	-36.6	
5.64	-62.6	H	3.0	-12.1	36.1	1.0	-47.2	-13.0	-34.2	
7.52	-63.3	H	3.0	-10.1	35.1	1.0	-44.3	-13.0	-31.3	
3.76	-61.5	V	3.0	-14.2	36.2	1.0	-49.4	-13.0	-36.4	
5.64	-61.9	V	3.0	-11.7	36.1	1.0	-46.8	-13.0	-33.8	
7.52	-63.5	V	3.0	-10.4	35.1	1.0	-44.5	-13.0	-31.5	
High Channel (1908.75MHz)										
3.82	-60.9	H	3.0	-13.9	36.1	1.0	-49.1	-13.0	-36.1	
5.73	-62.6	H	3.0	-12.0	36.1	1.0	-47.1	-13.0	-34.1	
7.64	-63.2	H	3.0	-9.9	35.0	1.0	-44.0	-13.0	-31.0	
3.82	-60.9	V	3.0	-13.4	36.1	1.0	-48.5	-13.0	-35.5	
5.73	-62.5	V	3.0	-12.1	36.1	1.0	-47.1	-13.0	-34.1	
7.64	-62.8	V	3.0	-9.6	35.0	1.0	-43.6	-13.0	-30.6	

Rev. 03.19.15

EVDO-Rev A, 1900MHz BC1

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: 16U23287 Date: 05/12/16 Test Engineer: 39005 Configuration: EUT Only Mode: Rev 0/A 1900MHz										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber Pre-amplifier Filter Limit 3m Chamber G 3m Chamber G Filter EIRP										
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1851.25MHz)										
3.70	-62.0	H	3.0	-15.3	36.2	1.0	-50.5	-13.0	-37.5	
5.55	-62.3	H	3.0	-12.0	36.1	1.0	-47.1	-13.0	-34.1	
7.41	-63.0	H	3.0	-9.9	35.2	1.0	-44.1	-13.0	-31.1	
3.70	-61.8	V	3.0	-14.7	36.2	1.0	-49.9	-13.0	-36.9	
5.55	-62.7	V	3.0	-12.5	36.1	1.0	-47.7	-13.0	-34.7	
7.41	-62.0	V	3.0	-9.0	35.2	1.0	-43.2	-13.0	-30.2	
Mid Channel (1880MHz)										
3.76	-61.5	H	3.0	-14.7	36.2	1.0	-49.8	-13.0	-36.8	
5.64	-62.6	H	3.0	-12.1	36.1	1.0	-47.2	-13.0	-34.2	
7.52	-63.7	H	3.0	-10.5	35.1	1.0	-44.6	-13.0	-31.6	
3.76	-61.4	V	3.0	-14.1	36.2	1.0	-49.3	-13.0	-36.3	
5.64	-62.0	V	3.0	-11.8	36.1	1.0	-46.8	-13.0	-33.8	
7.52	-63.4	V	3.0	-10.3	35.1	1.0	-44.4	-13.0	-31.4	
High Channel (1908.75MHz)										
3.82	-61.0	H	3.0	-14.0	36.1	1.0	-49.1	-13.0	-36.1	
5.73	-62.6	H	3.0	-12.0	36.1	1.0	-47.0	-13.0	-34.0	
7.64	-63.2	H	3.0	-9.9	35.0	1.0	-43.9	-13.0	-30.9	
3.82	-61.3	V	3.0	-13.8	36.1	1.0	-48.9	-13.0	-35.9	
5.73	-62.2	V	3.0	-11.8	36.1	1.0	-46.9	-13.0	-33.9	
7.64	-63.4	V	3.0	-10.1	35.0	1.0	-44.2	-13.0	-31.2	
Rev. 03.19.15										

CDMA2000 1xRTT, 800MHz BC10

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 16U23287
Date: 05/12/16
Test Engineer: 39005
Configuration: EUT Only
Mode: 1xRTT 800MHz

Test Equipment:
 Substitution: Horn T69 Substitution, and 8ft SMA Cable

Chamber

3m Chamber G

Pre-amplifier

3m Chamber G

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (817.25MHz)										
1.63	-55.4	H	3.0	-14.0	37.8	1.0	-50.8	-13.0	-37.8	
2.45	-62.0	H	3.0	-18.9	36.7	1.0	-54.6	-13.0	-41.6	
3.27	-62.4	H	3.0	-16.5	36.5	1.0	-52.0	-13.0	-39.0	
1.63	-56.1	V	3.0	-14.4	37.8	1.0	-51.2	-13.0	-38.2	
2.45	-63.8	V	3.0	-19.9	36.7	1.0	-55.7	-13.0	-42.7	
3.27	-62.3	V	3.0	-16.5	36.5	1.0	-52.0	-13.0	-39.0	
Mid Channel (820MHz)										
1.64	-59.1	H	3.0	-17.7	37.8	1.0	-54.5	-13.0	-41.5	
2.46	-62.9	H	3.0	-19.8	36.7	1.0	-55.5	-13.0	-42.5	
3.28	-63.0	H	3.0	-17.1	36.5	1.0	-52.6	-13.0	-39.6	
1.64	-56.8	V	3.0	-15.1	37.8	1.0	-51.9	-13.0	-38.9	
2.46	-62.4	V	3.0	-18.4	36.7	1.0	-54.1	-13.0	-41.1	
3.28	-62.1	V	3.0	-16.2	36.5	1.0	-51.7	-13.0	-38.7	
High Channel (822.75MHz)										
1.65	-57.6	H	3.0	-16.1	37.8	1.0	-53.0	-13.0	-40.0	
2.47	-62.1	H	3.0	-18.9	36.6	1.0	-54.5	-13.0	-41.5	
3.29	-62.6	H	3.0	-16.7	36.5	1.0	-52.2	-13.0	-39.2	
1.65	-55.9	V	3.0	-14.2	37.8	1.0	-51.0	-13.0	-38.0	
2.47	-62.7	V	3.0	-18.7	36.6	1.0	-54.3	-13.0	-41.3	
3.29	-62.7	V	3.0	-16.9	36.5	1.0	-52.4	-13.0	-39.4	

Rev. 03.19.15

EVDO-Rev A, 800MHz BC10

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 16U23287
Date: 05/13/06
Test Engineer: 39005
Configuration: EUT Only
Mode: Rev 0/A, 800MHz

Test Equipment:
 Substitution: Horn T69 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber G

Pre-amplifier
 3m Chamber G

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (817.25MHz)										
1.63	-62.3	H	3.0	-20.9	37.8	1.0	-57.7	-13.0	-44.7	
2.45	-62.6	H	3.0	-19.5	36.7	1.0	-55.2	-13.0	-42.2	
3.27	-63.3	H	3.0	-17.4	36.5	1.0	-53.0	-13.0	-40.0	
1.63	-63.1	V	3.0	-21.4	37.8	1.0	-58.2	-13.0	-45.2	
2.45	-63.8	V	3.0	-19.9	36.7	1.0	-55.7	-13.0	-42.7	
3.27	-63.7	V	3.0	-17.9	36.5	1.0	-53.5	-13.0	-40.5	
Mid Channel (820MHz)										
1.64	-63.6	H	3.0	-22.1	37.8	1.0	-59.0	-13.0	-46.0	
2.46	-63.1	H	3.0	-20.0	36.7	1.0	-55.6	-13.0	-42.6	
3.28	-63.7	H	3.0	-17.8	36.5	1.0	-53.3	-13.0	-40.3	
1.64	-63.0	V	3.0	-21.3	37.8	1.0	-58.1	-13.0	-45.1	
2.46	-63.3	V	3.0	-19.4	36.7	1.0	-55.0	-13.0	-42.0	
3.28	-63.6	V	3.0	-17.8	36.5	1.0	-53.3	-13.0	-40.3	
High Channel (822.75MHz)										
1.65	-62.2	H	3.0	-20.8	37.8	1.0	-57.6	-13.0	-44.6	
2.47	-62.7	H	3.0	-19.6	36.6	1.0	-55.2	-13.0	-42.2	
3.29	-63.2	H	3.0	-17.3	36.5	1.0	-52.8	-13.0	-39.8	
1.65	-62.4	V	3.0	-20.7	37.8	1.0	-57.5	-13.0	-44.5	
2.47	-63.5	V	3.0	-19.5	36.6	1.0	-55.1	-13.0	-42.1	
3.29	-63.3	V	3.0	-17.4	36.5	1.0	-53.0	-13.0	-40.0	

Rev. 03.19.15

10.5.3. UMTS

UMTS REL 99, 850MHz BAND 5

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:

Project #: 15U22288

Date: 02/18/16

Test Engineer: 37290

Configuration: EUT Only

Mode: REL 99, 850MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
3m Chamber F

Pre-amplifier
3m Chamber F

Filter
Filter

Limit
EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (826.4MHz)										
1.65	-67.0	H	3.0	-25.8	33.7	1.0	-58.5	-13.0	-45.5	
2.48	-68.3	H	3.0	-24.2	34.1	1.0	-57.3	-13.0	-44.3	
3.31	-68.7	H	3.0	-20.5	34.7	1.0	-54.1	-13.0	-41.1	
1.65	-60.6	V	3.0	-17.2	33.7	1.0	-49.9	-13.0	-36.9	
2.48	-67.6	V	3.0	-22.8	34.1	1.0	-55.9	-13.0	-42.9	
3.31	-68.4	V	3.0	-19.9	34.7	1.0	-53.6	-13.0	-40.6	
Mid Channel (836.6MHz)										
1.67	-68.1	H	3.0	-26.8	33.7	1.0	-59.5	-13.0	-46.5	
2.51	-67.6	H	3.0	-23.4	34.1	1.0	-56.5	-13.0	-43.5	
3.35	-68.8	H	3.0	-20.4	34.6	1.0	-54.0	-13.0	-41.0	
1.67	-67.5	V	3.0	-24.1	33.7	1.0	-56.8	-13.0	-43.8	
2.51	-66.9	V	3.0	-22.1	34.1	1.0	-55.2	-13.0	-42.2	
3.35	-68.4	V	3.0	-19.8	34.6	1.0	-53.4	-13.0	-40.4	
High Channel (846.6MHz)										
1.69	-64.1	H	3.0	-22.6	33.7	1.0	-55.3	-13.0	-42.3	
2.54	-67.8	H	3.0	-23.4	34.1	1.0	-56.5	-13.0	-43.5	
3.39	-69.0	H	3.0	-20.4	34.6	1.0	-54.0	-13.0	-41.0	
1.69	-59.8	V	3.0	-16.4	33.7	1.0	-49.0	-13.0	-36.0	
2.54	-68.2	V	3.0	-23.2	34.1	1.0	-56.3	-13.0	-43.3	
3.39	-69.0	V	3.0	-20.2	34.6	1.0	-53.8	-13.0	-40.8	

Rev. 03.19.15

UMTS HSDPA, 850MHz BAND 5

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #: 15U22288
Date: 02/18/16
Test Engineer: 37290
Configuration: EUT Only
Mode: HSDPA 850MHz

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber F

Pre-amplifier
 3m Chamber F

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (826.4MHz)										
1.65	-61.0	H	3.0	-19.8	33.7	1.0	-52.5	-13.0	-39.5	
2.48	-68.3	H	3.0	-24.2	34.1	1.0	-57.3	-13.0	-44.3	
3.31	-69.0	H	3.0	-20.7	34.7	1.0	-54.4	-13.0	-41.4	
1.65	-67.0	V	3.0	-23.6	33.7	1.0	-56.3	-13.0	-43.3	
2.48	-68.2	V	3.0	-23.4	34.1	1.0	-56.5	-13.0	-43.5	
3.31	-68.5	V	3.0	-20.0	34.7	1.0	-53.7	-13.0	-40.7	
Mid Channel (836.6MHz)										
1.67	-66.4	H	3.0	-25.1	33.7	1.0	-57.8	-13.0	-44.8	
2.51	-68.1	H	3.0	-23.9	34.1	1.0	-57.0	-13.0	-44.0	
3.35	-67.6	H	3.0	-19.1	34.6	1.0	-52.8	-13.0	-39.8	
1.67	-60.8	V	3.0	-17.4	33.7	1.0	-50.1	-13.0	-37.1	
2.51	-66.7	V	3.0	-21.9	34.1	1.0	-55.0	-13.0	-42.0	
3.35	-68.1	V	3.0	-19.5	34.6	1.0	-53.1	-13.0	-40.1	
High Channel (846.6MHz)										
1.69	-67.5	H	3.0	-26.0	33.7	1.0	-58.7	-13.0	-45.7	
2.54	-69.2	H	3.0	-24.8	34.1	1.0	-57.9	-13.0	-44.9	
3.39	-69.4	H	3.0	-20.8	34.6	1.0	-54.4	-13.0	-41.4	
1.69	-58.8	V	3.0	-15.3	33.7	1.0	-48.0	-13.0	-35.0	
2.54	-66.9	V	3.0	-21.9	34.1	1.0	-55.1	-13.0	-42.1	
3.39	-68.1	V	3.0	-19.3	34.6	1.0	-52.9	-13.0	-39.9	

Rev. 03.19.15

UMTS REL 99, 1900MHz BAND 2

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 15U22288
Date: 02/18/16
Test Engineer: 39472
Configuration: EUT Only
Mode: REL 99, 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1852.4MHz)										
3.70	-67.4	H	3.0	-17.6	34.4	1.0	-51.1	-13.0	-38.1	
5.56	-68.8	H	3.0	-15.3	34.1	1.0	-48.4	-13.0	-35.4	
7.41	-71.6	H	3.0	-15.3	33.6	1.0	-47.9	-13.0	-34.9	
3.70	-68.2	V	3.0	-18.3	34.4	1.0	-51.8	-13.0	-38.8	
5.55	-68.4	V	3.0	-14.8	34.1	1.0	-47.9	-13.0	-34.9	
7.42	-71.8	V	3.0	-15.7	33.6	1.0	-48.3	-13.0	-35.3	
Mid Channel (1880MHz)										
3.76	-67.7	H	3.0	-17.7	34.4	1.0	-51.1	-13.0	-38.1	
5.64	-69.1	H	3.0	-15.5	34.1	1.0	-48.6	-13.0	-35.6	
7.52	-71.5	H	3.0	-15.0	33.5	1.0	-47.5	-13.0	-34.5	
3.76	-68.3	V	3.0	-18.2	34.4	1.0	-51.7	-13.0	-38.7	
5.64	-68.9	V	3.0	-15.2	34.1	1.0	-48.3	-13.0	-35.3	
7.52	-71.2	V	3.0	-14.9	33.5	1.0	-47.4	-13.0	-34.4	
High Channel (1907.6MHz)										
3.81	-67.3	H	3.0	-17.1	34.4	1.0	-50.5	-13.0	-37.5	
5.72	-70.3	H	3.0	-16.6	34.1	1.0	-49.7	-13.0	-36.7	
7.66	-71.0	H	3.0	-14.4	33.4	1.0	-46.8	-13.0	-33.8	
3.82	-68.5	V	3.0	-18.2	34.4	1.0	-51.6	-13.0	-38.6	
5.72	-71.1	V	3.0	-17.2	34.1	1.0	-50.3	-13.0	-37.3	
7.63	-70.9	V	3.0	-14.5	33.4	1.0	-46.9	-13.0	-33.9	

Rev. 03.19.15

UMTS HSDPA, 1900MHz BAND 2

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 15U22288
Date: 02/18/16
Test Engineer: 43579
Configuration: EUT Only
Mode: HSDPA 1900MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1852.4MHz)										
3.70	-67.7	H	3.0	-17.9	34.4	1.0	-51.4	-13.0	-38.4	
5.56	-69.9	H	3.0	-16.5	34.1	1.0	-49.6	-13.0	-36.6	
7.41	-71.6	H	3.0	-15.3	33.6	1.0	-47.9	-13.0	-34.9	
9.26	-73.3	H	3.0	-14.5	32.2	1.0	-45.7	-13.0	-32.7	
3.70	-66.6	V	3.0	-16.7	34.4	1.0	-50.2	-13.0	-37.2	
5.56	-69.0	V	3.0	-15.4	34.1	1.0	-48.5	-13.0	-35.5	
7.41	-71.5	V	3.0	-15.4	33.6	1.0	-48.0	-13.0	-35.0	
9.26	-73.5	V	3.0	-14.8	32.2	1.0	-46.0	-13.0	-33.0	
Mid Channel (1880MHz)										
3.76	-68.0	H	3.0	-18.1	34.4	1.0	-51.5	-13.0	-38.5	
5.64	-69.0	H	3.0	-15.4	34.1	1.0	-48.5	-13.0	-35.5	
7.52	-71.4	H	3.0	-15.0	33.5	1.0	-47.5	-13.0	-34.5	
9.40	-74.5	H	3.0	-15.5	32.1	1.0	-46.6	-13.0	-33.6	
3.76	-67.9	V	3.0	-17.8	34.4	1.0	-51.2	-13.0	-38.2	
5.64	-69.1	V	3.0	-15.3	34.1	1.0	-48.4	-13.0	-35.4	
7.52	-71.2	V	3.0	-14.9	33.5	1.0	-47.4	-13.0	-34.4	
9.40	-73.9	V	3.0	-15.0	32.1	1.0	-46.1	-13.0	-33.1	
High Channel (1907.6MHz)										
3.82	-68.3	H	3.0	-18.1	34.4	1.0	-51.5	-13.0	-38.5	
5.72	-70.9	H	3.0	-17.2	34.1	1.0	-50.3	-13.0	-37.3	
7.63	-71.3	H	3.0	-14.7	33.4	1.0	-47.1	-13.0	-34.1	
9.54	-73.9	H	3.0	-14.7	32.0	1.0	-45.7	-13.0	-32.7	
3.82	-68.3	V	3.0	-18.0	34.4	1.0	-51.4	-13.0	-38.4	
5.72	-69.8	V	3.0	-15.9	34.1	1.0	-49.0	-13.0	-36.0	
7.63	-71.4	V	3.0	-14.9	33.4	1.0	-47.4	-13.0	-34.4	
9.54	-73.6	V	3.0	-14.5	32.0	1.0	-45.5	-13.0	-32.5	

Rev. 03.19.15

UMTS REL 99, 1700MHz BAND 4

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 15U22288
Date: 02/18/16
Test Engineer: 43579
Configuration: EUT Only
Mode: REL 99, 1700MHz

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1712.4MHz)										
3.42	-69.0	H	3.0	-20.3	34.6	1.0	-53.9	-13.0	-40.9	
5.14	-69.5	H	3.0	-16.8	34.2	1.0	-50.0	-13.0	-37.0	
6.85	-70.7	H	3.0	-15.2	33.9	1.0	-48.1	-13.0	-35.1	
8.56	-72.2	H	3.0	-14.3	32.7	1.0	-46.1	-13.0	-33.1	
3.42	-69.2	V	3.0	-20.3	34.6	1.0	-53.9	-13.0	-40.9	
5.14	-70.1	V	3.0	-17.1	34.2	1.0	-50.2	-13.0	-37.2	
6.85	-70.6	V	3.0	-15.2	33.9	1.0	-48.2	-13.0	-35.2	
8.56	-72.3	V	3.0	-14.6	32.7	1.0	-46.3	-13.0	-33.3	
Mid Channel (1732.6MHz)										
3.47	-69.6	H	3.0	-20.7	34.6	1.0	-54.3	-13.0	-41.3	
5.20	-70.3	H	3.0	-17.4	34.2	1.0	-50.6	-13.0	-37.6	
6.93	-70.8	H	3.0	-15.2	33.9	1.0	-48.1	-13.0	-35.1	
8.66	-73.0	H	3.0	-15.0	32.6	1.0	-46.6	-13.0	-33.6	
3.47	-69.2	V	3.0	-20.2	34.6	1.0	-53.7	-13.0	-40.7	
5.20	-69.7	V	3.0	-16.6	34.2	1.0	-49.8	-13.0	-36.8	
6.93	-70.2	V	3.0	-14.7	33.9	1.0	-47.7	-13.0	-34.7	
8.66	-73.8	V	3.0	-16.0	32.6	1.0	-47.6	-13.0	-34.6	
High Channel (1752.6MHz)										
3.51	-68.9	H	3.0	-19.8	34.5	1.0	-53.4	-13.0	-40.4	
5.26	-68.6	H	3.0	-15.7	34.2	1.0	-48.8	-13.0	-35.8	
7.01	-70.8	H	3.0	-15.0	33.9	1.0	-47.9	-13.0	-34.9	
8.76	-72.5	H	3.0	-14.4	32.6	1.0	-45.9	-13.0	-32.9	
3.51	-69.5	V	3.0	-20.3	34.5	1.0	-53.8	-13.0	-40.8	
5.26	-69.1	V	3.0	-15.9	34.2	1.0	-49.0	-13.0	-36.0	
7.01	-70.8	V	3.0	-15.2	33.9	1.0	-48.1	-13.0	-35.1	
8.76	-72.7	V	3.0	-14.7	32.6	1.0	-46.3	-13.0	-33.3	

Rev. 03.19.15

UMTS HSDPA, 1700MHz BAND 4

**High Frequency Substitution Measurement
UL Fremont Radiated Chamber**

Company:
Project #: 15U22288
Date: 02/18/16
Test Engineer: 43579
Configuration: EUT Only
Mode: HSDPA 1700MHz

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber	Pre-amplifier	Filter	Limit
3m Chamber F	3m Chamber F	Filter	EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1712.4MHz)										
3.42	-69.2	H	3.0	-20.5	34.6	1.0	-54.1	-13.0	-41.1	
5.14	-70.5	H	3.0	-17.7	34.2	1.0	-50.9	-13.0	-37.9	
6.85	-71.2	H	3.0	-15.7	33.9	1.0	-48.6	-13.0	-35.6	
8.56	-72.5	H	3.0	-14.6	32.7	1.0	-46.3	-13.0	-33.3	
3.42	-68.6	V	3.0	-19.7	34.6	1.0	-53.3	-13.0	-40.3	
5.14	-70.3	V	3.0	-17.3	34.2	1.0	-50.5	-13.0	-37.5	
6.85	-70.8	V	3.0	-15.4	33.9	1.0	-48.4	-13.0	-35.4	
8.56	-73.1	V	3.0	-15.4	32.7	1.0	-47.1	-13.0	-34.1	
Mid Channel (1732.6MHz)										
3.47	-69.0	H	3.0	-20.1	34.6	1.0	-53.7	-13.0	-40.7	
5.20	-69.2	H	3.0	-16.3	34.2	1.0	-49.5	-13.0	-36.5	
6.93	-70.6	H	3.0	-14.9	33.9	1.0	-47.9	-13.0	-34.9	
8.66	-73.1	H	3.0	-15.1	32.6	1.0	-46.7	-13.0	-33.7	
3.47	-68.9	V	3.0	-19.8	34.6	1.0	-53.4	-13.0	-40.4	
5.20	-68.8	V	3.0	-15.7	34.2	1.0	-48.9	-13.0	-35.9	
6.93	-70.4	V	3.0	-14.9	33.9	1.0	-47.8	-13.0	-34.8	
8.66	-72.6	V	3.0	-14.8	32.6	1.0	-46.4	-13.0	-33.4	
High Channel (1752.6MHz)										
3.51	-69.7	H	3.0	-20.7	34.5	1.0	-54.2	-13.0	-41.2	
5.26	-69.3	H	3.0	-16.4	34.2	1.0	-49.5	-13.0	-36.5	
7.01	-70.5	H	3.0	-14.7	33.9	1.0	-47.6	-13.0	-34.6	
8.76	-74.0	H	3.0	-15.9	32.6	1.0	-47.4	-13.0	-34.4	
3.51	-69.9	V	3.0	-20.7	34.5	1.0	-54.2	-13.0	-41.2	
5.26	-68.7	V	3.0	-15.5	34.2	1.0	-48.6	-13.0	-35.6	
7.01	-71.0	V	3.0	-15.4	33.9	1.0	-48.3	-13.0	-35.3	
8.76	-71.6	V	3.0	-13.6	32.6	1.0	-45.2	-13.0	-32.2	

Rev. 03.19.15