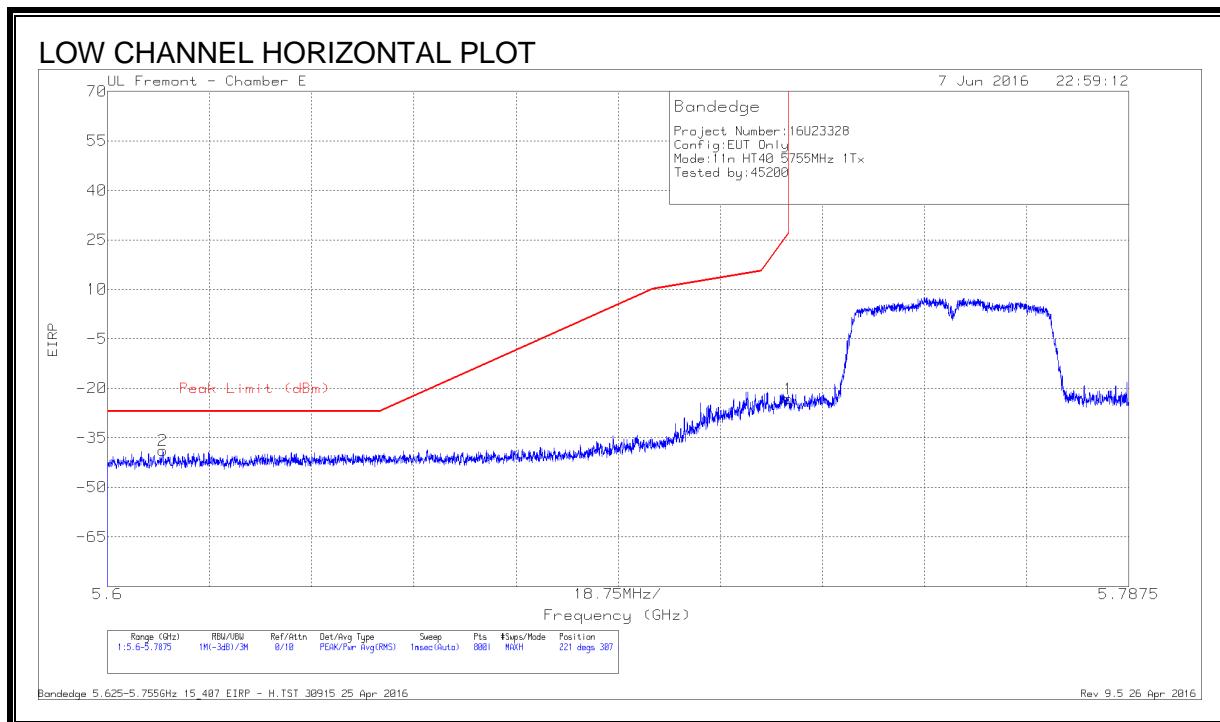


8.26. 802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND

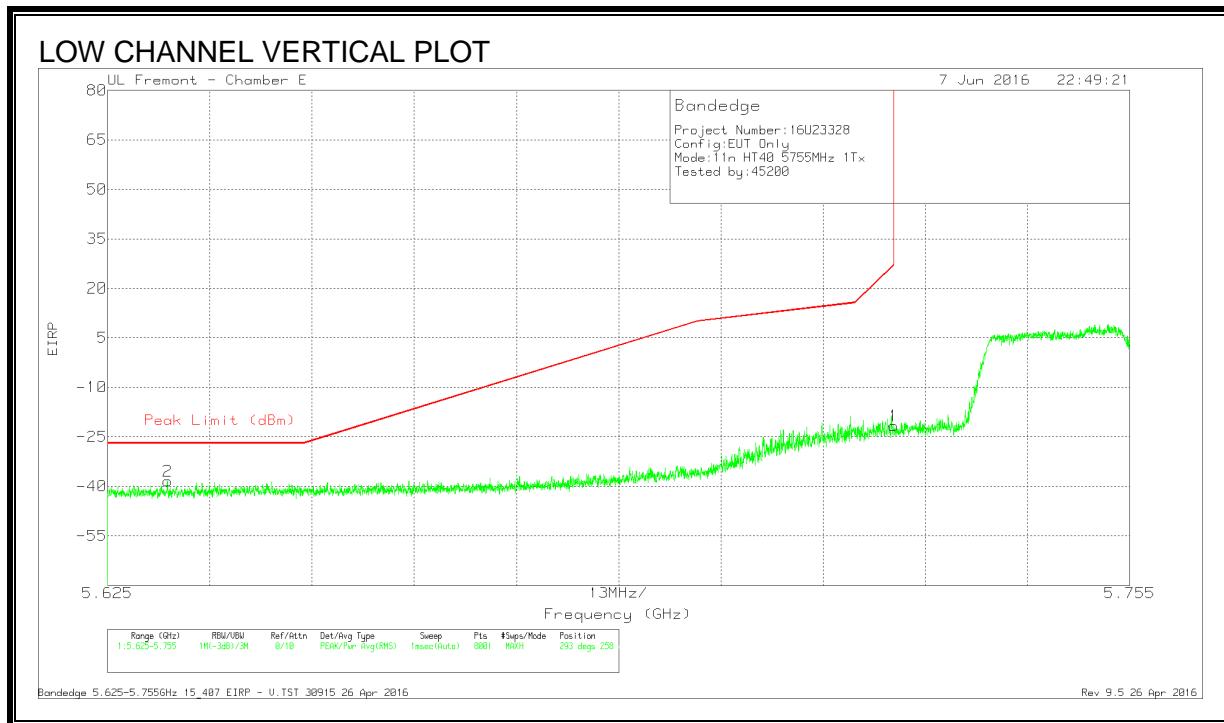
RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL)



DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.61	-65.08	Pk	34.7	-20.2	11.8	-38.78	-27	-11.78	221	307	H
1	5.725	-49.75	Pk	34.9	-20.1	11.8	-23.15	26.99	-50.14	221	307	H

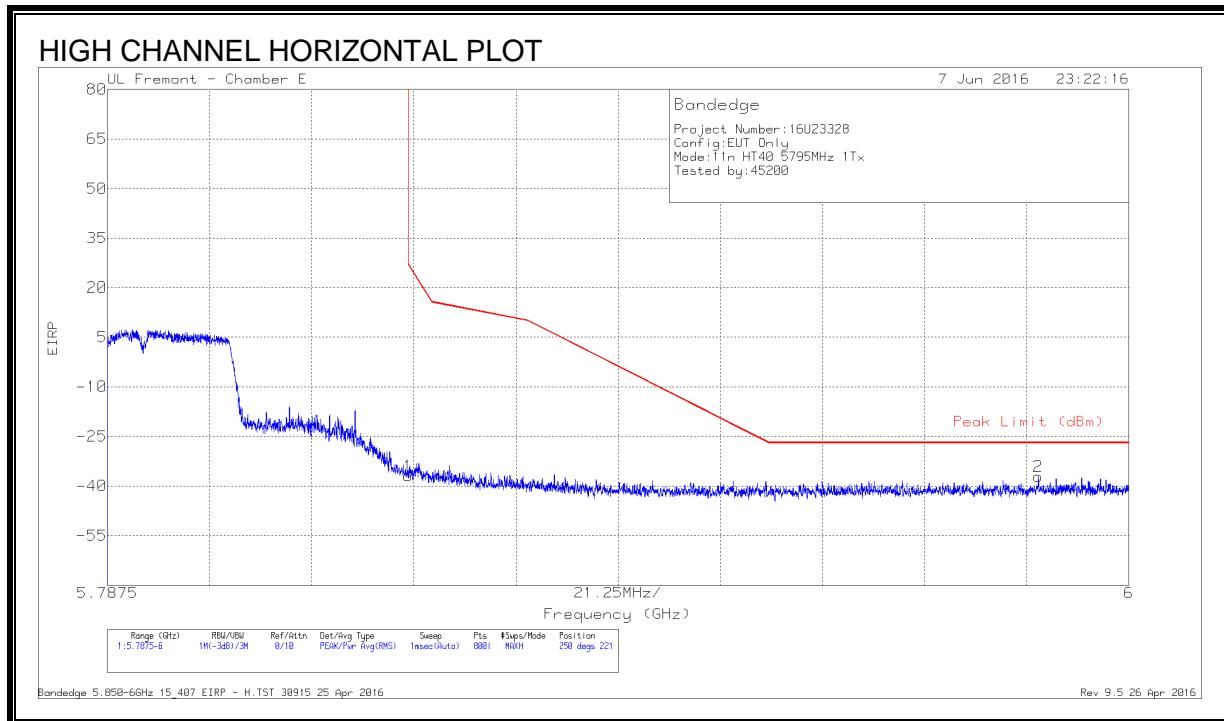
Pk - Peak detector



DATA

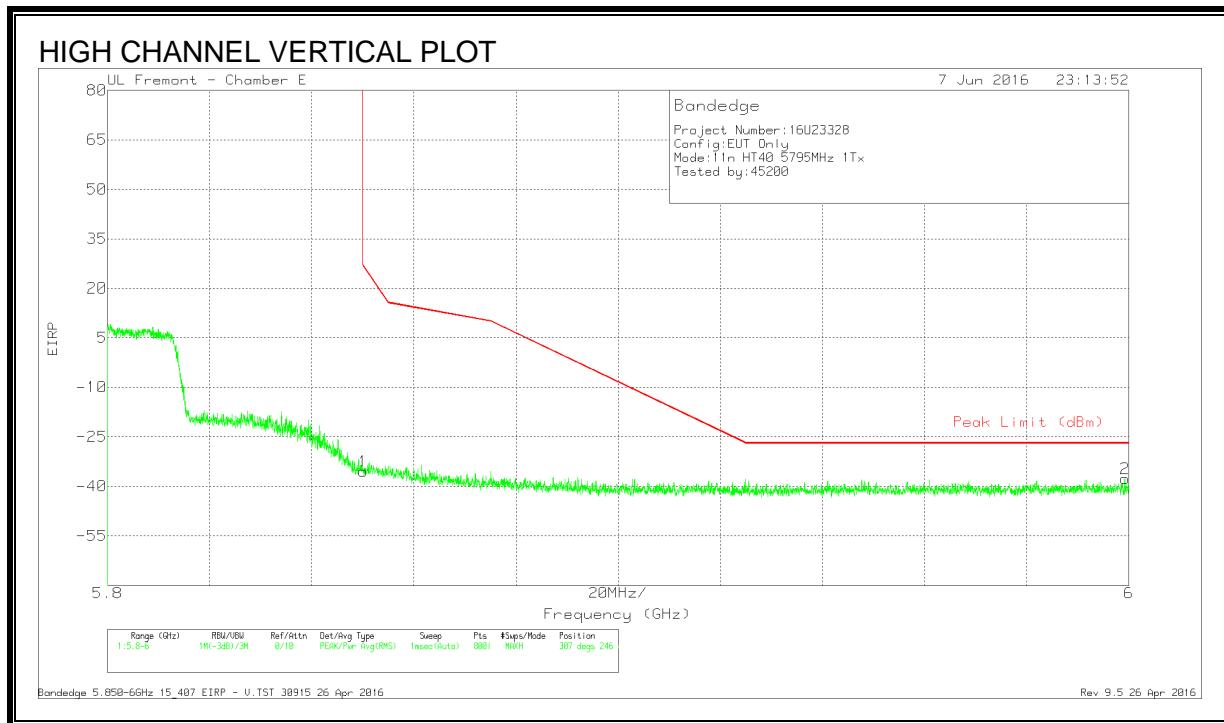
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.633	-64.93	Pk	34.8	-20.1	11.8	-38.43	-27	-11.43	293	258	V
1	5.725	-48.3	Pk	34.9	-20.1	11.8	-21.7	26.97	-48.67	293	258	V

Pk - Peak detector

RESTRICTED BANDEDGE, CHAIN 0 (HIGH CHANNEL)**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.28	Pk	34.9	-20.3	11.8	-36.88	26.99	-63.87	250	221	H
2	5.981	-63.9	Pk	35	-20	11.8	-37.1	-27	-10.1	250	221	H

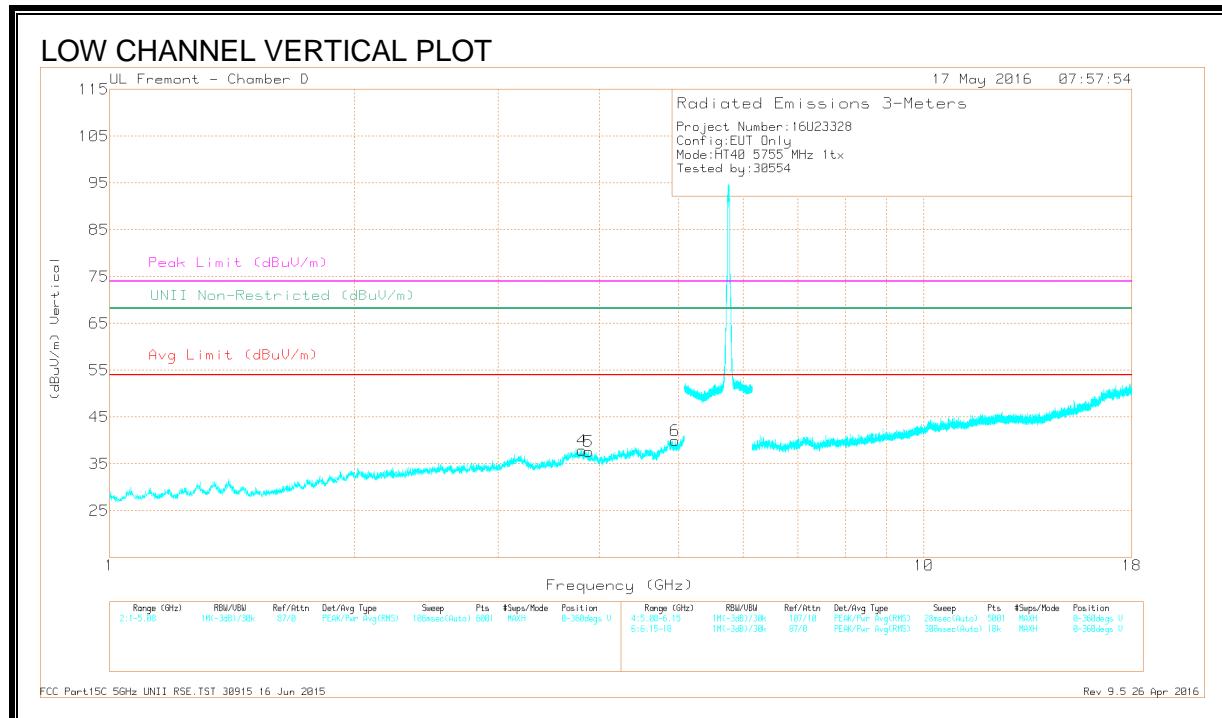
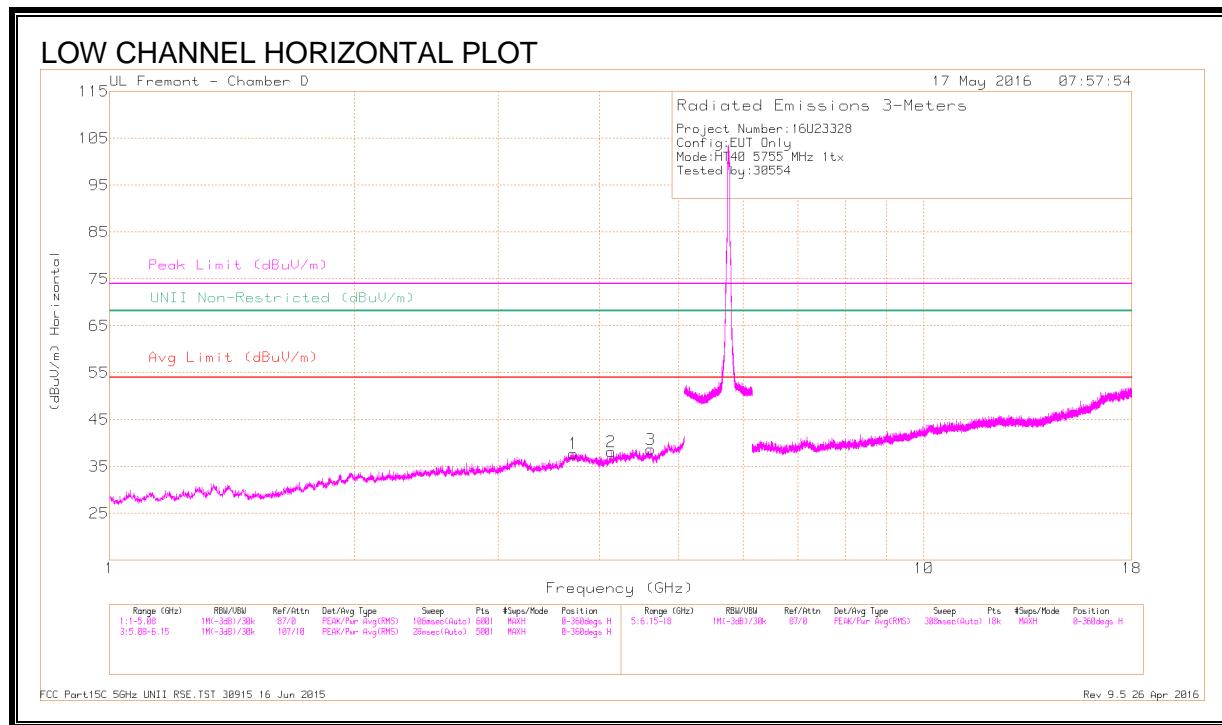
Pk - Peak detector



DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-61.85	Pk	34.9	-20.3	11.8	-35.45	26.94	-62.39	307	246	V
2	5.999	-64.75	Pk	35.1	-19.9	11.8	-37.75	-27	-10.75	307	246	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

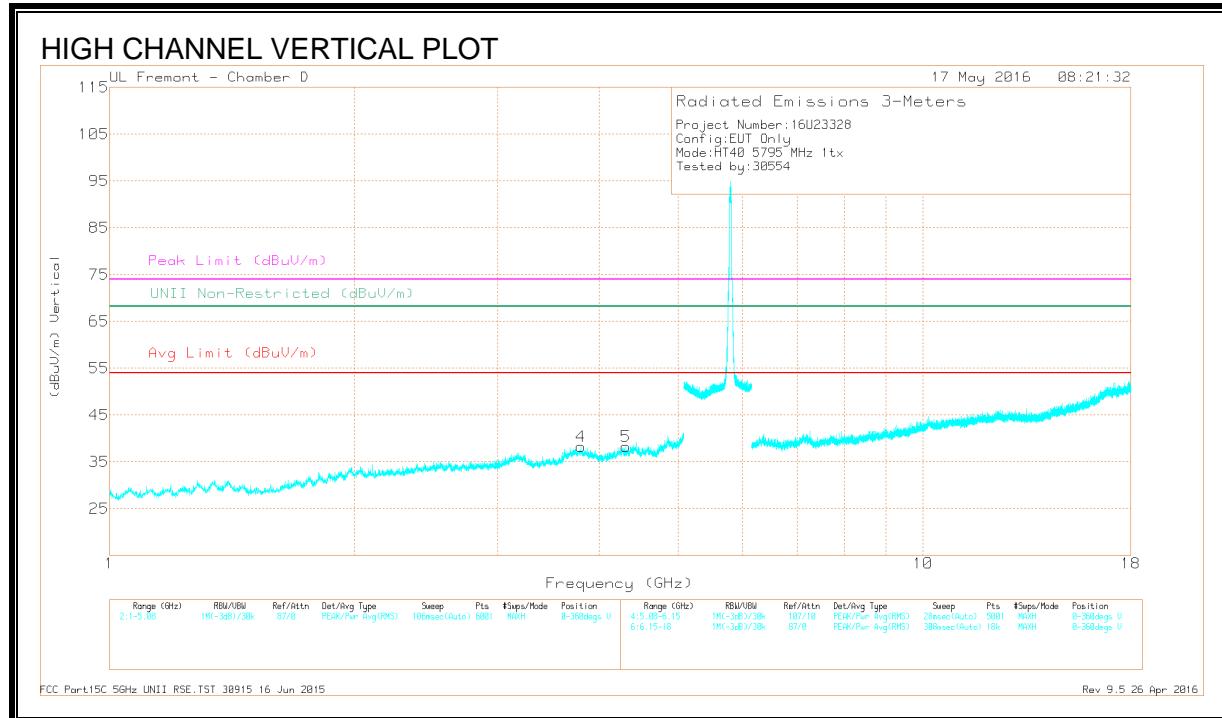
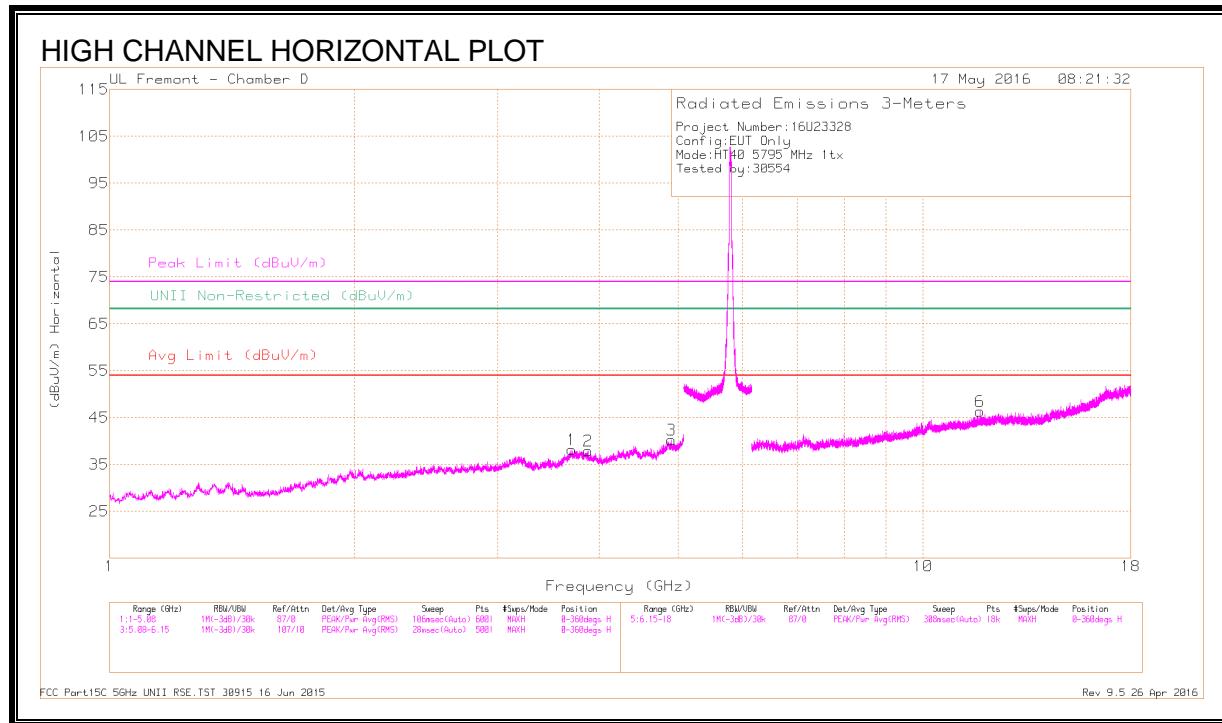
DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 7712 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.716	37.99	PK-U	33.5	-28.9	42.59	-	-	74	-31.41	-	-	341	138	H
	* 3.713	27.94	ADR	33.5	-29	32.44	54	-21.56	-	-	-	-	341	138	H
2	* 4.13	38.13	PK-U	33.5	-28.2	43.43	-	-	74	-30.57	-	-	17	251	H
	* 4.13	27.73	ADR	33.5	-28.2	33.03	54	-20.97	-	-	-	-	17	251	H
3	* 4.621	36.92	PK-U	34.1	-26.6	44.42	-	-	74	-29.58	-	-	226	226	H
	* 4.621	26.91	ADR	34.1	-26.6	34.41	54	-19.59	-	-	-	-	226	226	H
4	* 3.801	39.43	PK-U	33.6	-28.4	44.63	-	-	74	-29.37	-	-	176	374	V
	* 3.799	27.79	ADR	33.6	-28.4	32.99	54	-21.01	-	-	-	-	176	374	V
5	* 3.874	38.89	PK-U	33.5	-28.9	43.49	-	-	74	-30.51	-	-	63	184	V
	* 3.873	28.16	ADR	33.5	-28.9	32.76	54	-21.24	-	-	-	-	63	184	V
6	* 4.946	37.36	PK-U	34.1	-26.5	44.96	-	-	74	-29.04	-	-	274	141	V
	* 4.948	27.27	ADR	34.1	-26.5	34.87	54	-19.13	-	-	-	-	274	141	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

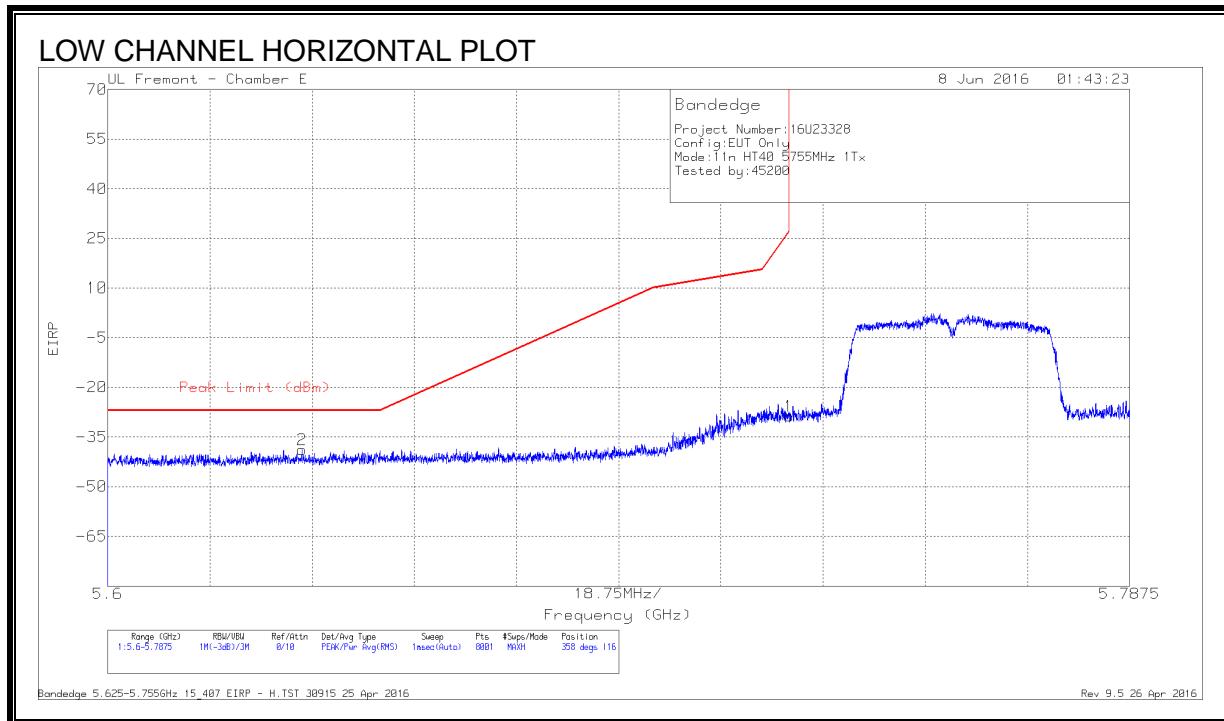
DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
1	* 3.7	37.65	PK-U	33.5	-29	42.15	-	-	74	-31.85	-	-	-	14	104	H
	* 3.701	27.7	ADR	33.5	-29	32.2	54	-21.8	-	-	-	-	-	14	104	H
2	* 3.877	38.34	PK-U	33.5	-28.9	42.94	-	-	74	-31.06	-	-	-	209	177	H
	* 3.877	28.21	ADR	33.5	-28.9	32.81	54	-21.19	-	-	-	-	-	209	177	H
3	* 4.903	37.01	PK-U	34.1	-25.7	45.41	-	-	74	-28.59	-	-	-	224	241	H
	* 4.9	26.76	ADR	34.1	-25.6	35.26	54	-18.74	-	-	-	-	-	224	241	H
4	* 3.794	38.41	PK-U	33.6	-28.5	43.51	-	-	74	-30.49	-	-	-	195	384	V
	* 3.794	27.73	ADR	33.6	-28.5	32.83	54	-21.17	-	-	-	-	-	195	384	V
5	* 4.313	37.5	PK-U	33.6	-28.2	42.9	-	-	74	-31.1	-	-	-	341	156	V
	* 4.312	27.57	ADR	33.6	-28.2	32.97	54	-21.03	-	-	-	-	-	341	156	V
6	* 11.744	33.6	PK-U	38.7	-20.8	51.5	-	-	74	-22.5	-	-	-	213	266	H
	* 11.744	23.44	ADR	38.7	-20.8	41.34	54	-12.66	-	-	-	-	-	213	266	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

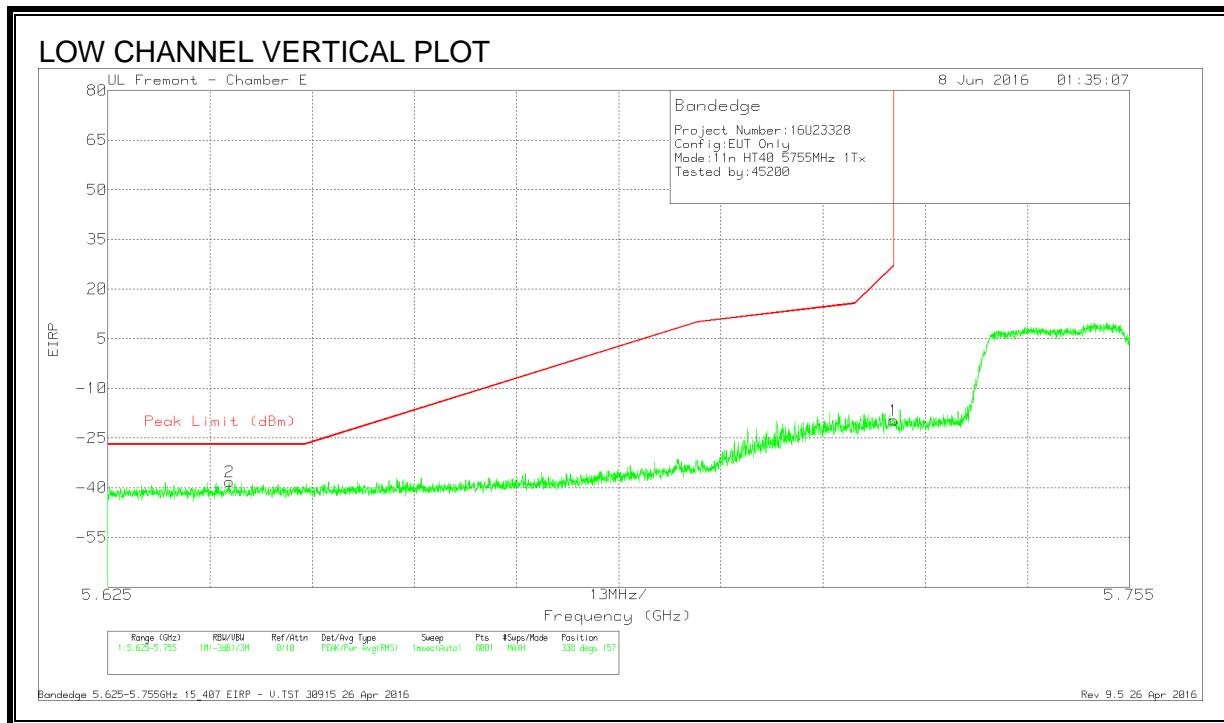
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

RESTRICTED BANEDGE, CHAIN 1 (LOW CHANNEL)**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.636	-65.5	Pk	34.8	-20	11.8	-38.9	-27	-11.9	358	116	H
1	5.725	-55.36	Pk	34.9	-20.1	11.8	-28.76	26.99	-55.75	358	116	H

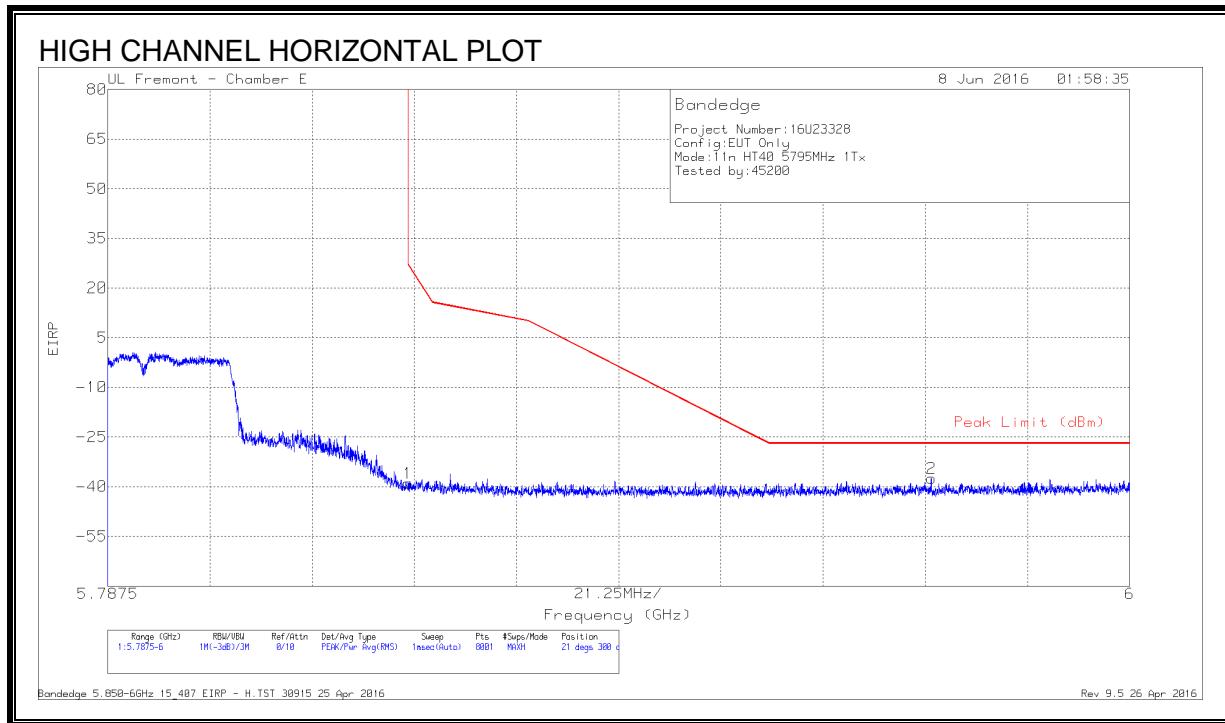
Pk - Peak detector



DATA

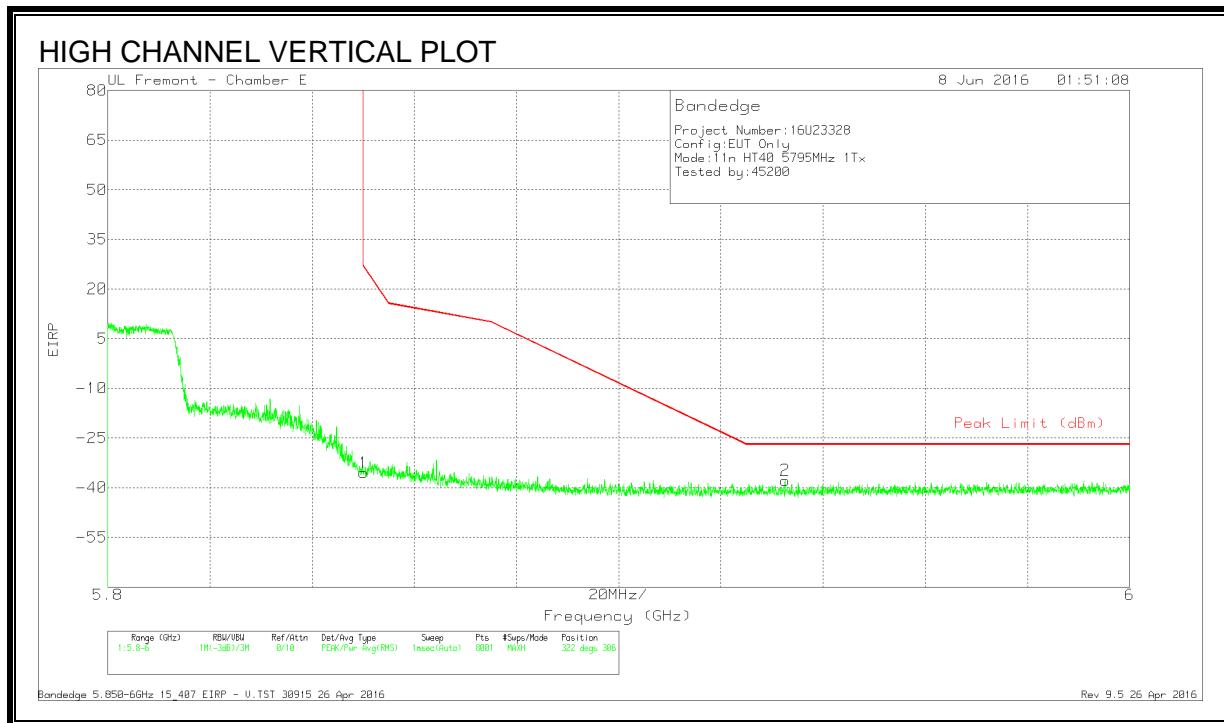
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64	-64.87	Pk	34.8	-19.9	11.8	-38.17	-27	-11.17	338	157	V
1	5.725	-46.13	Pk	34.9	-20.1	11.8	-19.53	26.97	-46.5	338	157	V

Pk - Peak detector

RESTRICTED BANDEDGE, CHAIN 1 (HIGH CHANNEL)**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.28	Pk	34.9	-20.3	11.8	-38.88	26.99	-65.87	21	300	H
2	5.959	-64.12	Pk	35	-20.2	11.8	-37.52	-27	-10.52	21	300	H

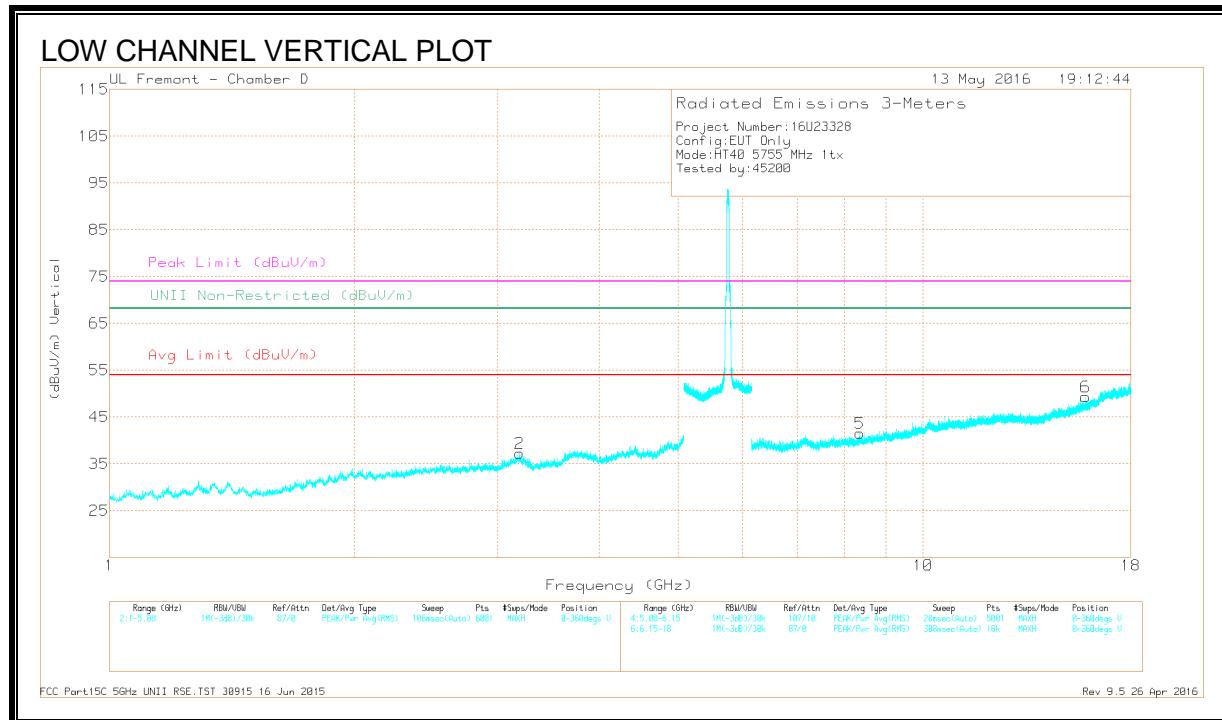
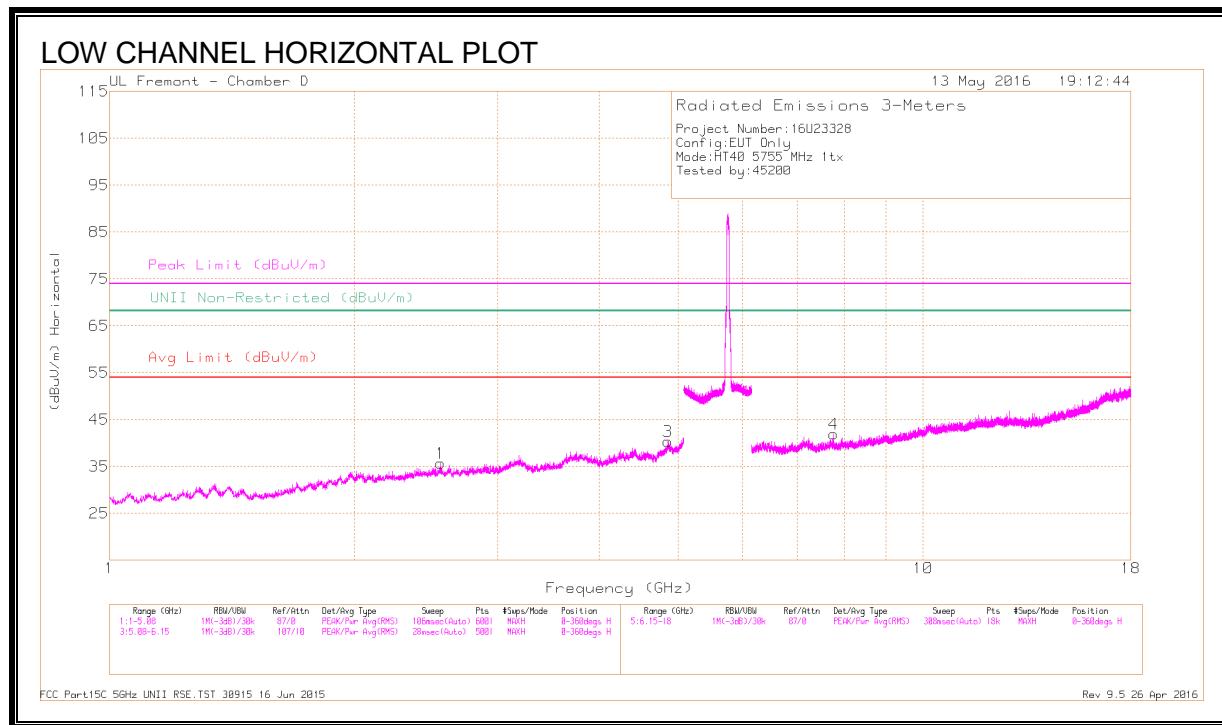
Pk - Peak detector



DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-61.92	Pk	34.9	-20.3	11.8	-35.52	26.94	-62.46	322	306	V
2	5.933	-64.26	Pk	35	-20.3	11.8	-37.76	-27	-10.76	322	306	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

DATA

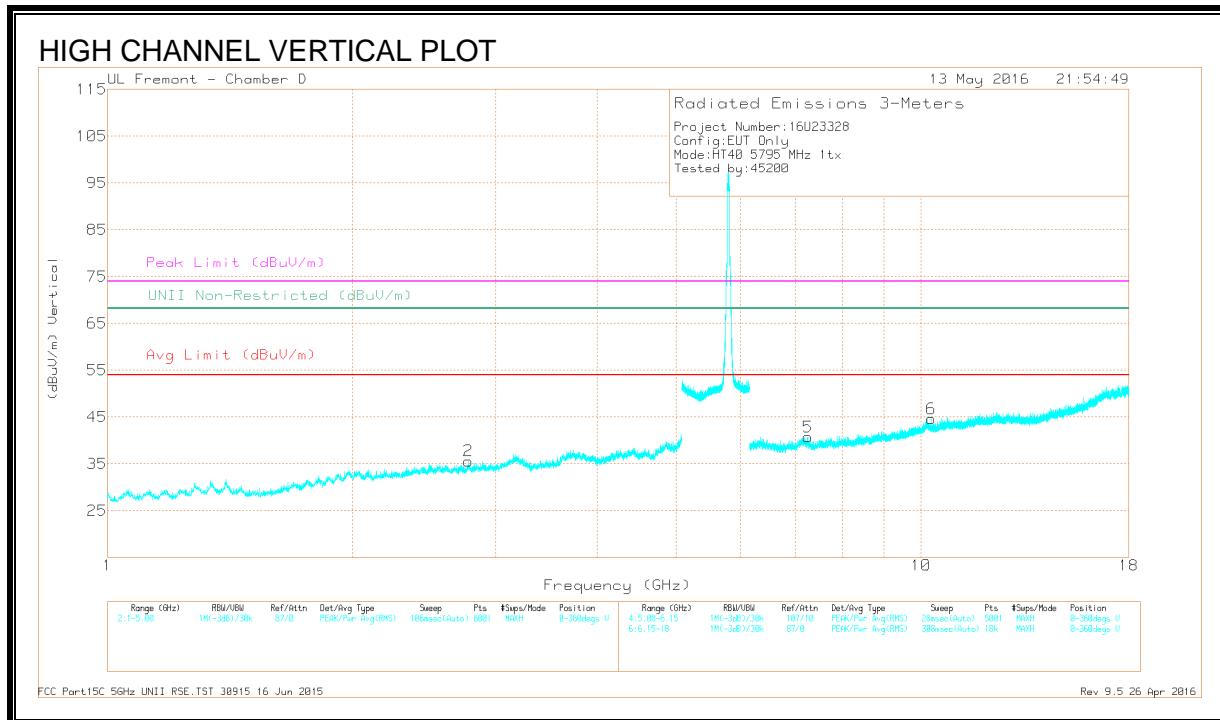
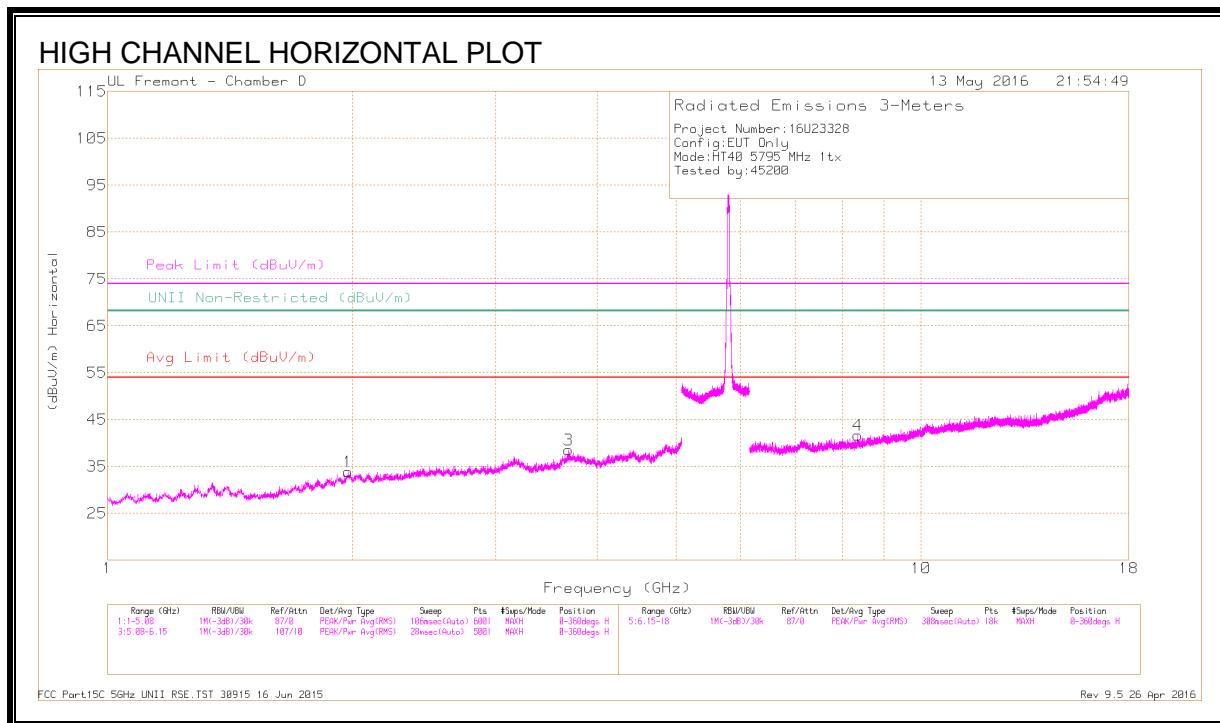
Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (db)	Peak Limit (dBuV/m)	Pk Margin (db)	UNII Non-Restricted (dBuV/m)	Pk Margin (db)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.854	36.56	PK-U	34.1	-25.4	45.26	-	-	74	-28.74	-	-	102	387	H
	* 4.854	26.27	ADR	34.1	-25.4	34.97	54	-19.03	-	-	-	-	102	387	H
5	* 8.349	35.16	PK-U	35.8	-23.3	47.66	-	-	74	-26.34	-	-	12	133	V
	* 8.349	24.17	ADR	35.8	-23.3	36.67	54	-17.33	-	-	-	-	12	133	V
6	* 15.832	33.69	PK-U	40.3	-19.8	54.19	-	-	74	-19.81	-	-	118	179	V
	* 15.831	24.3	ADR	40.3	-19.8	44.80	54	-9.2	-	-	-	-	118	179	V
1	2.55	39.2	PK-U	32.2	-29.6	41.8	-	-	-	-	68.2	-26.4	117	160	H
2	3.191	38.94	PK-U	33.9	-29	43.84	-	-	-	-	68.2	-24.36	274	389	V
4	7.762	34.98	PK-U	35.8	-24	46.78	-	-	-	-	68.2	-21.42	198	273	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS



DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	U-NII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
3	*3.687	38.26	PK-U	33.5	-29	42.76	-	-	74	-31.24	-	-	175	226	H
	*3.686	27.92	ADR	33.5	-29	32.42	54	-21.58	-	-	-	-	175	226	H
2	*2.776	39.89	PK-U	32.4	-29.7	42.59	-	-	74	-31.41	-	-	87	201	V
	*2.777	28.81	ADR	32.4	-29.7	31.51	54	-22.49	-	-	-	-	87	201	V
4	*8.359	34.35	PK-U	35.8	-23.2	46.95	-	-	74	-27.05	-	-	278	278	H
	*8.358	24.52	ADR	35.8	-23.2	37.12	54	-16.88	-	-	-	-	278	278	H
5	*7.264	35.5	PK-U	35.7	-24.4	46.8	-	-	74	-27.2	-	-	156	144	V
	*7.264	25.13	ADR	35.7	-24.4	36.43	54	-17.57	-	-	-	-	156	144	V
1	1.974	40.46	PK-U	31.4	-30.7	41.16	-	-	-	-	68.2	-27.04	57	127	H
6	10.296	33.29	PK-U	37.5	-21.1	49.69	-	-	-	-	68.2	-18.51	84	315	V

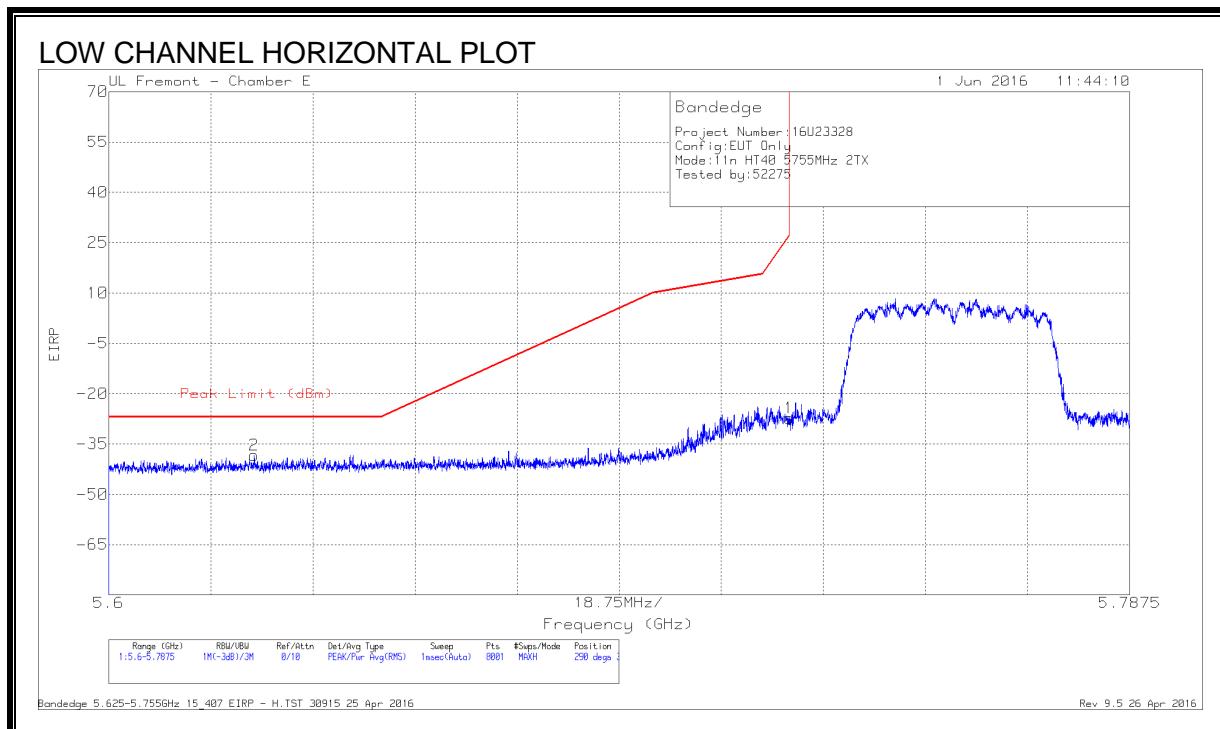
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

8.27. 802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND

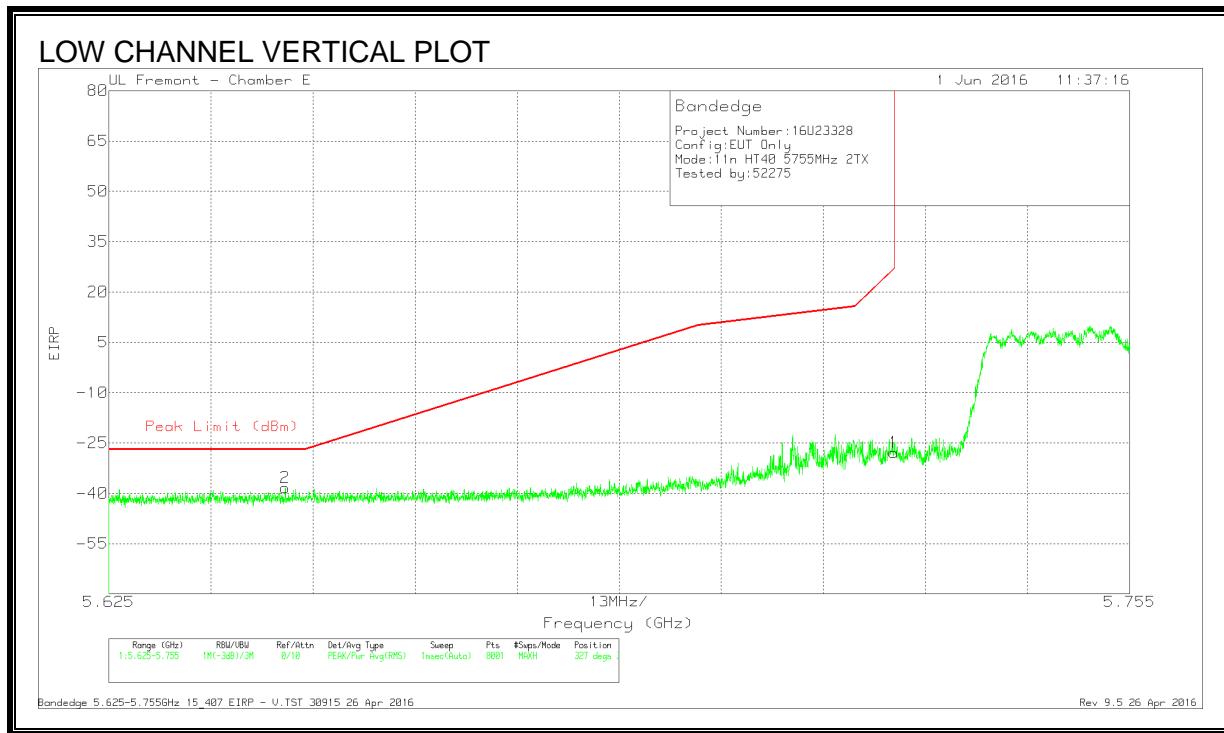
RESTRICTED BANDEDGE (LOW CHANNEL)



DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.627	-64.94	Pk	34.8	-20	11.8	-38.34	-27	-11.34	290	354	H
1	5.725	-53.88	Pk	34.9	-20.1	11.8	-27.28	26.99	-54.27	290	354	H

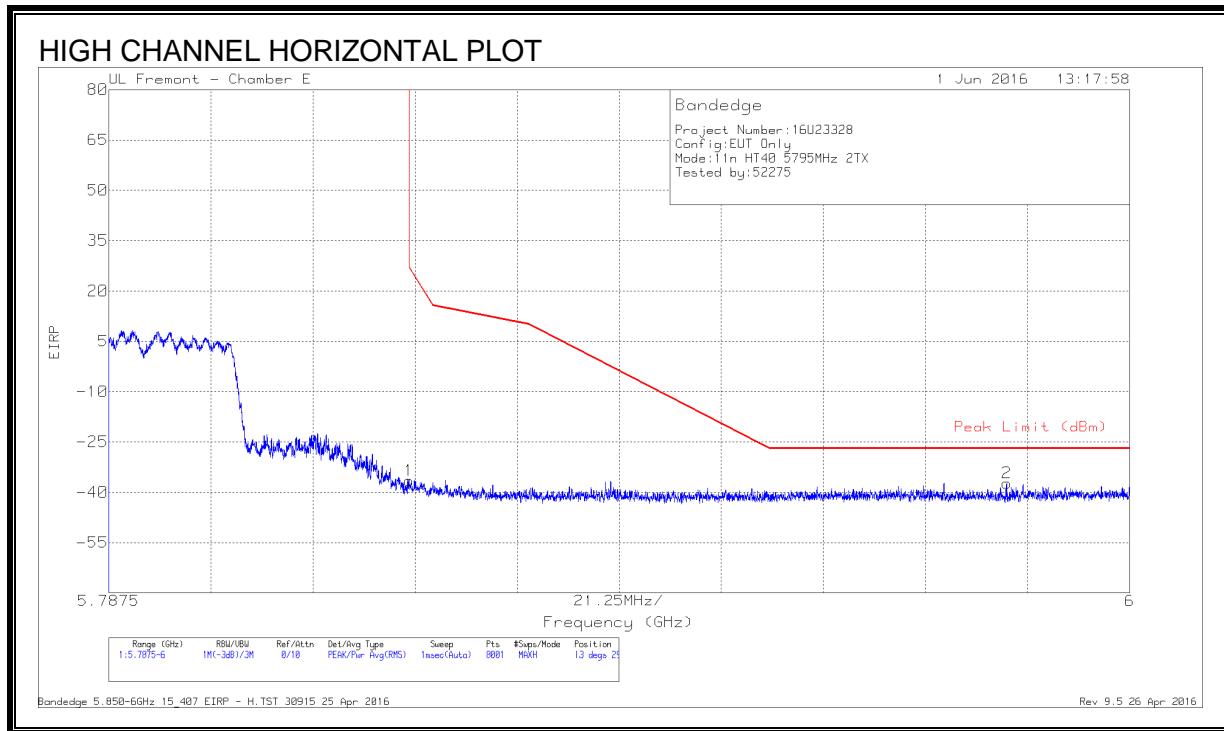
Pk - Peak detector



DATA

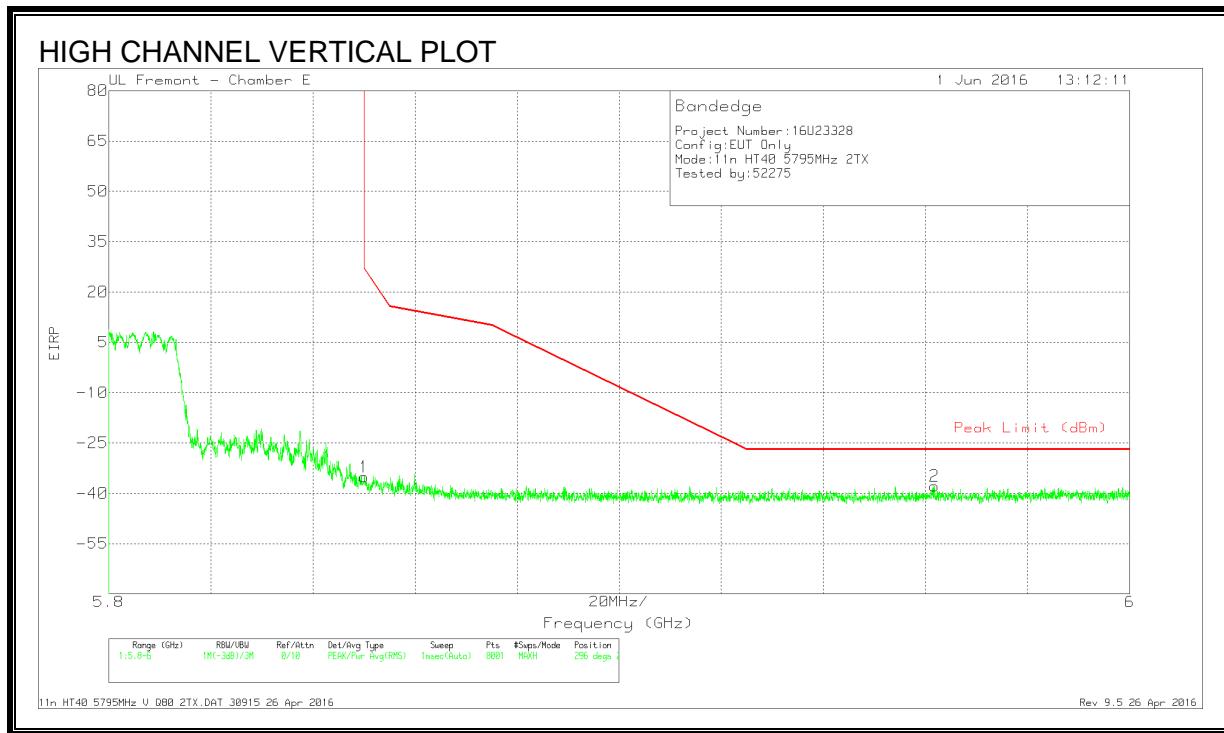
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647	-64.93	Pk	34.8	-20	11.8	-38.33	-27	-11.33	327	335	V
1	5.725	-54.45	Pk	34.9	-20.1	11.8	-27.85	26.97	-54.82	327	335	V

Pk - Peak detector

RESTRICTED BANEDGE (HIGH CHANNEL)**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-62.92	Pk	34.9	-20.3	11.8	-36.52	26.99	-63.51	13	290	H
2	5.974	-63.94	Pk	35	-20.1	11.8	-37.24	-27	-10.24	13	290	H

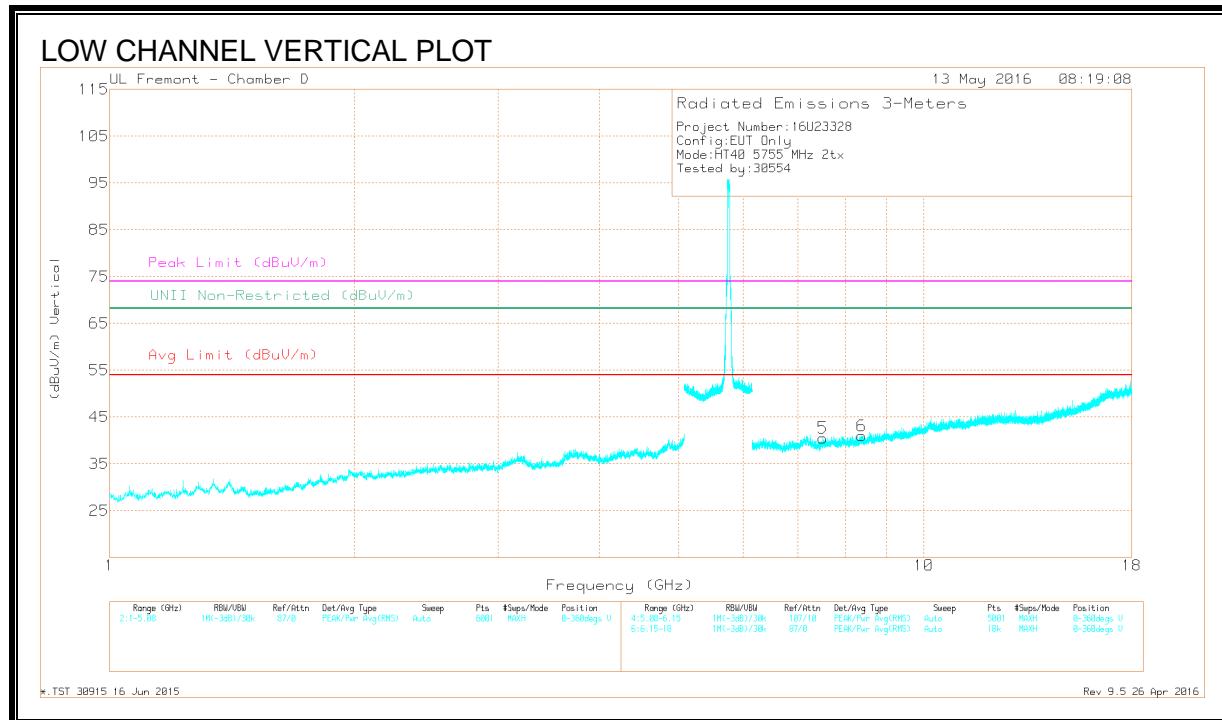
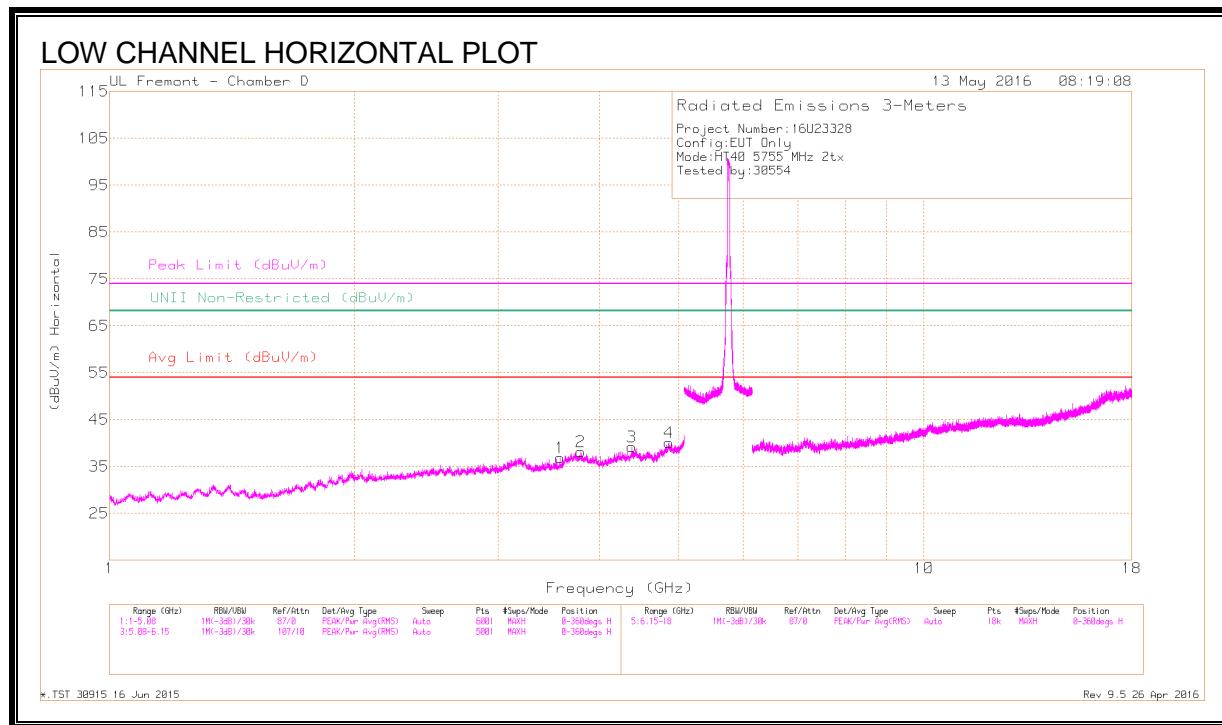
Pk - Peak detector



DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-61.52	Pk	34.9	-20.3	11.8	-35.12	26.94	-62.06	296	250	V
2	5.962	-64.43	Pk	35	-20.2	11.8	-37.83	-27	-10.83	296	250	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

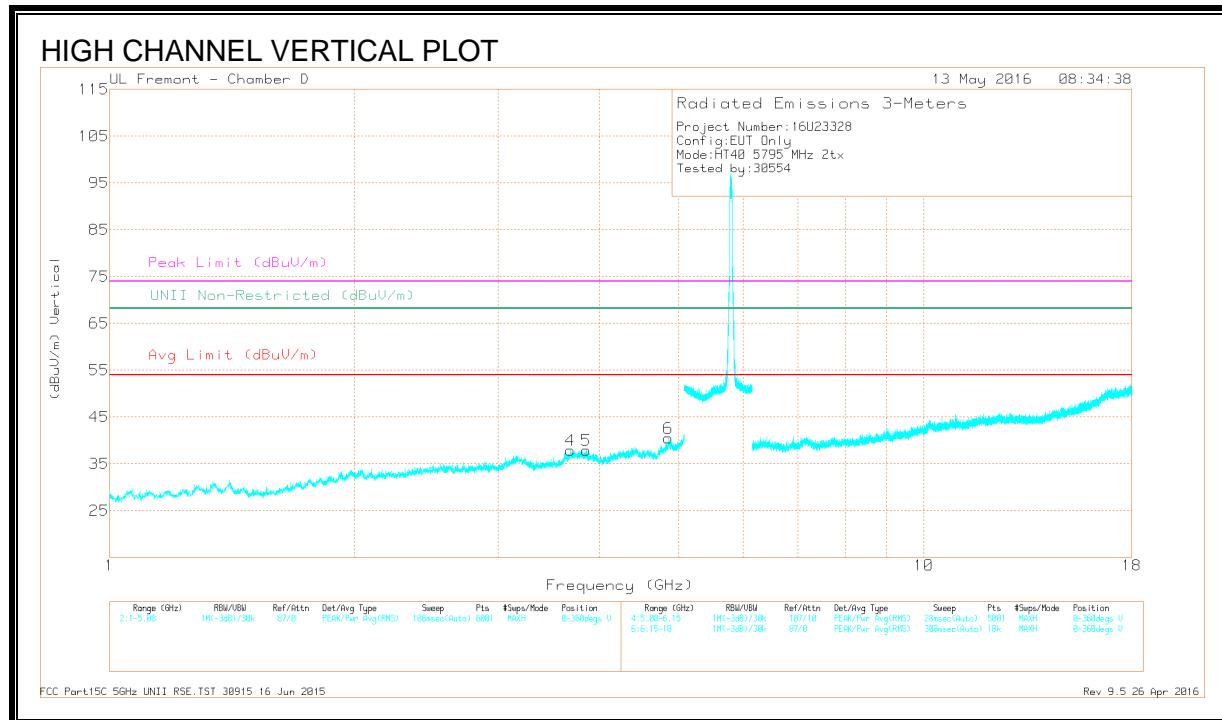
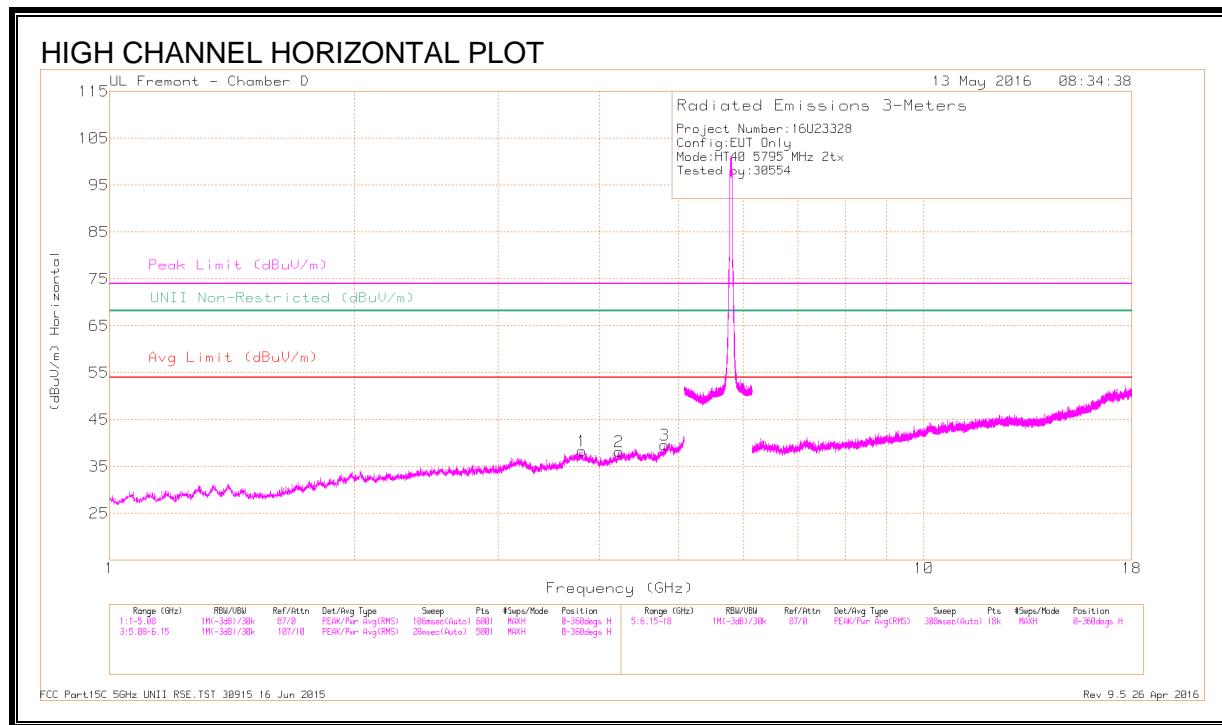
DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.57	39.2	PK-U	33.2	-29.1	43.3	-	-	74	-30.7	-	-	36	135	H
	* 3.573	28.5	ADR	33.2	-29.1	32.6	54	-21.4	-	-	-	-	36	135	H
2	* 3.791	38.37	PK-U	33.5	-28.5	43.37	-	-	74	-30.63	-	-	46	264	H
	* 3.791	27.87	ADR	33.5	-28.5	32.87	54	-21.13	-	-	-	-	46	264	H
3	* 4.378	37.59	PK-U	33.9	-27.6	43.89	-	-	74	-30.11	-	-	185	182	H
	* 4.379	27.25	ADR	33.9	-27.6	33.55	54	-20.45	-	-	-	-	185	182	H
4	* 4.864	36.99	PK-U	34.1	-25.2	45.89	-	-	74	-28.11	-	-	322	164	H
	* 4.863	26.48	ADR	34.1	-25.2	35.38	54	-18.62	-	-	-	-	322	164	H
5	* 7.517	35.27	PK-U	35.7	-24.5	46.47	-	-	74	-27.53	-	-	124	214	V
	* 7.52	25.14	ADR	35.7	-24.5	36.34	54	-17.66	-	-	-	-	124	214	V
6	* 8.391	36.49	PK-U	35.8	-23.6	48.69	-	-	74	-25.31	-	-	258	352	V
	* 8.391	25.03	ADR	35.8	-23.6	37.23	54	-16.77	-	-	-	-	258	352	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.802	38.97	PK-U	33.6	-28.4	44.17	-	-	74	-29.83	-	-	152	126	H
	* 3.802	27.88	ADR	33.6	-28.4	33.08	54	-20.92	-	-	-	-	152	126	H
2	* 4.225	37.34	PK-U	33.5	-27.5	43.34	-	-	74	-30.66	-	-	226	101	H
	* 4.225	27.4	ADR	33.5	-27.5	33.4	54	-20.6	-	-	-	-	226	101	H
3	* 4.809	38.51	PK-U	34.1	-27.4	45.21	-	-	74	-28.79	-	-	48	200	H
	* 4.809	27.96	ADR	34.1	-27.4	34.66	54	-19.34	-	-	-	-	48	200	H
4	* 3.682	38.74	PK-U	33.5	-28.9	43.34	-	-	74	-30.66	-	-	68	325	V
	* 3.682	28.06	ADR	33.5	-28.9	32.66	54	-21.34	-	-	-	-	68	325	V
5	* 3.851	38.75	PK-U	33.5	-28.7	43.55	-	-	74	-30.45	-	-	72	115	V
	* 3.852	28.06	ADR	33.5	-28.7	32.86	54	-21.14	-	-	-	-	72	115	V
6	* 4.855	37.34	PK-U	34.1	-25.3	46.14	-	-	74	-27.86	-	-	135	168	V
	* 4.855	26.97	ADR	34.1	-25.4	35.67	54	-18.33	-	-	-	-	132	168	V

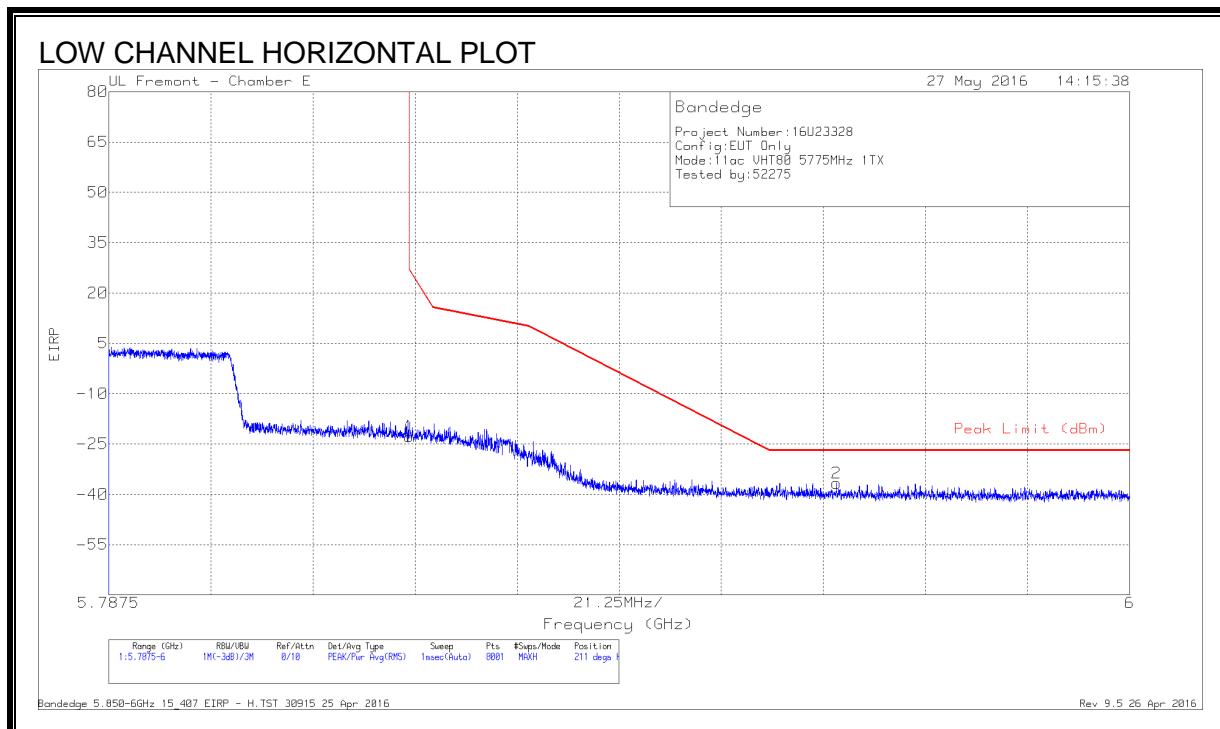
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

8.28. 802.11ac VHT80 1Tx MODE IN THE 5.8 GHz BAND

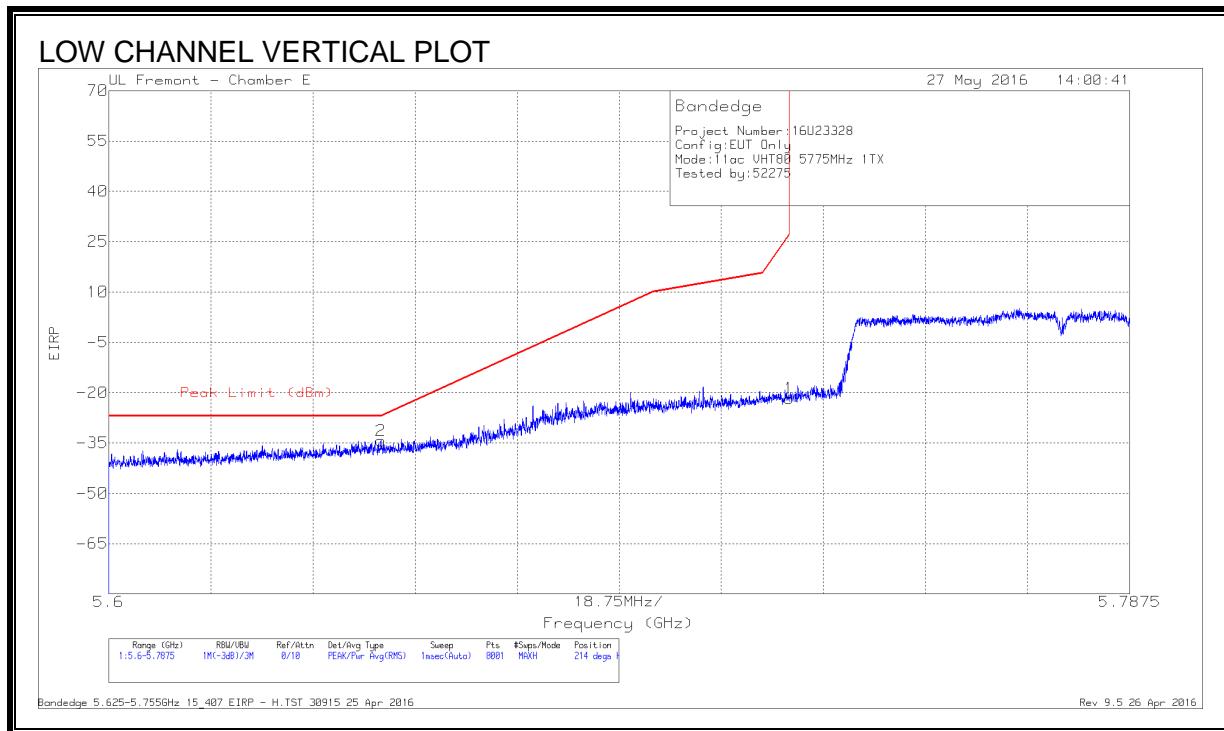
RESTRICTED BANDEDGE, CHAIN 0 (LOW)



DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-49.16	Pk	34.9	-20.3	11.8	-22.76	26.99	-49.75	211	104	H
2	5.939	-63.17	Pk	35	-20.3	11.8	-36.67	-27	-9.67	211	104	H

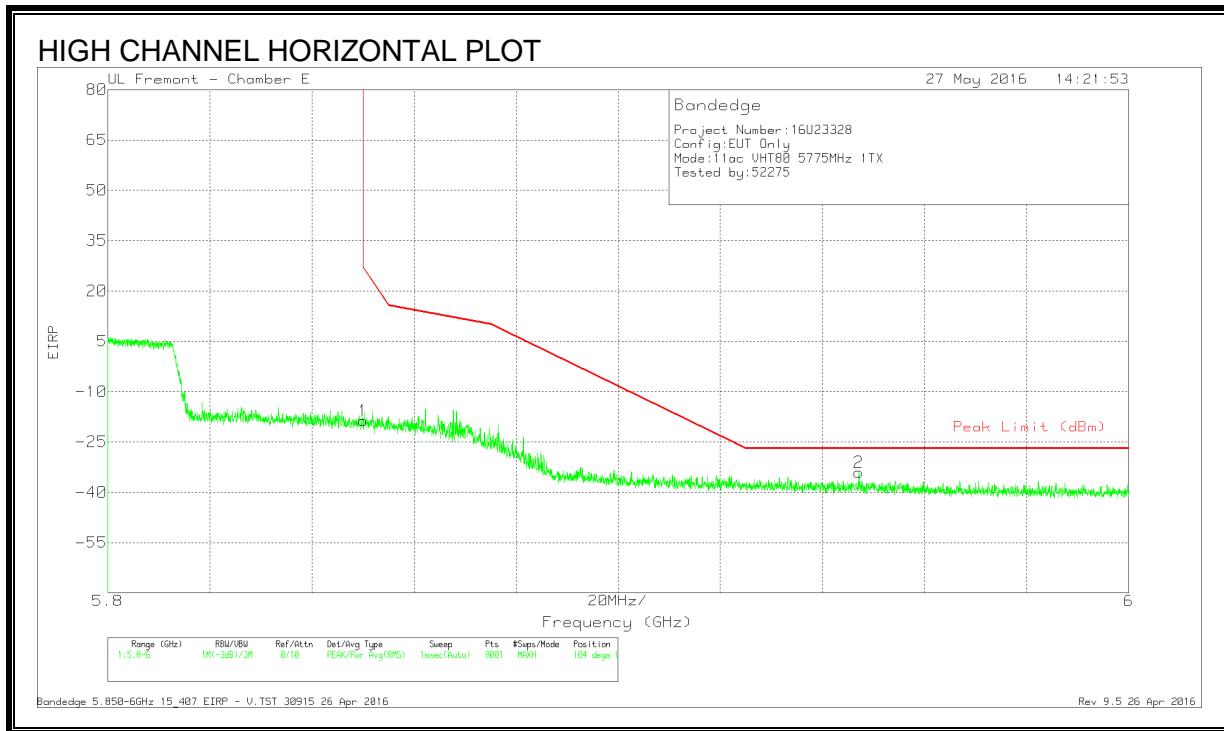
Pk - Peak detector



DATA

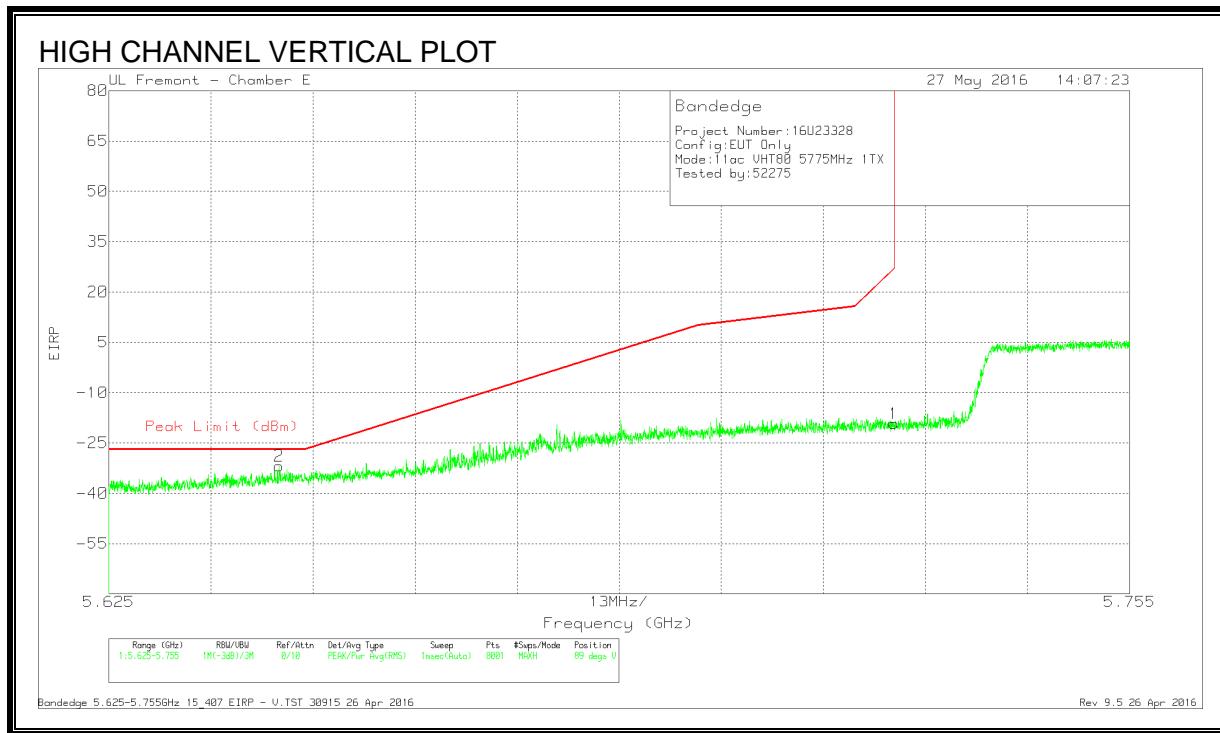
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65	-60.93	Pk	34.8	-20	11.8	-34.33	-27	-7.33	214	284	H
1	5.725	-48.3	Pk	34.9	-20.1	11.8	-21.7	26.99	-48.69	214	284	H

Pk - Peak detector

RESTRICTED BANEDGE, CHAIN 0 (HIGH)**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-45.03	Pk	34.9	-20.3	11.8	-18.63	26.94	-45.57	104	114	V
2	5.947	-60.54	Pk	35	-20.3	11.8	-34.04	-27	-7.04	104	114	V

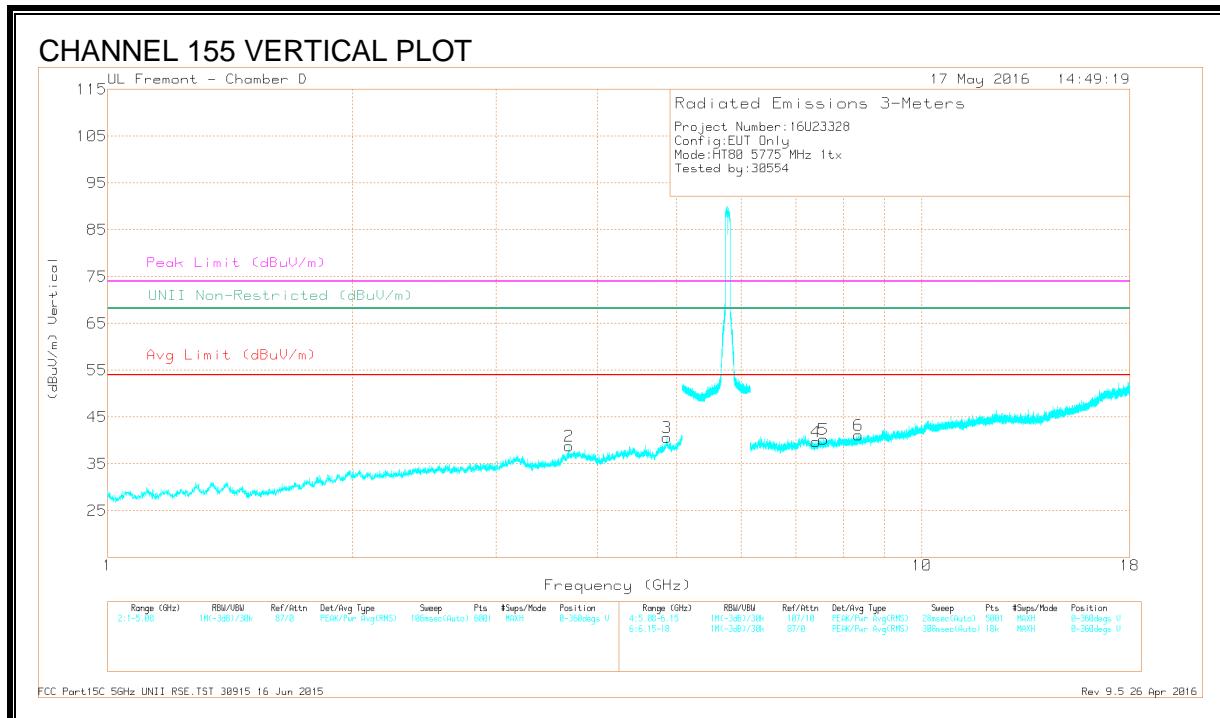
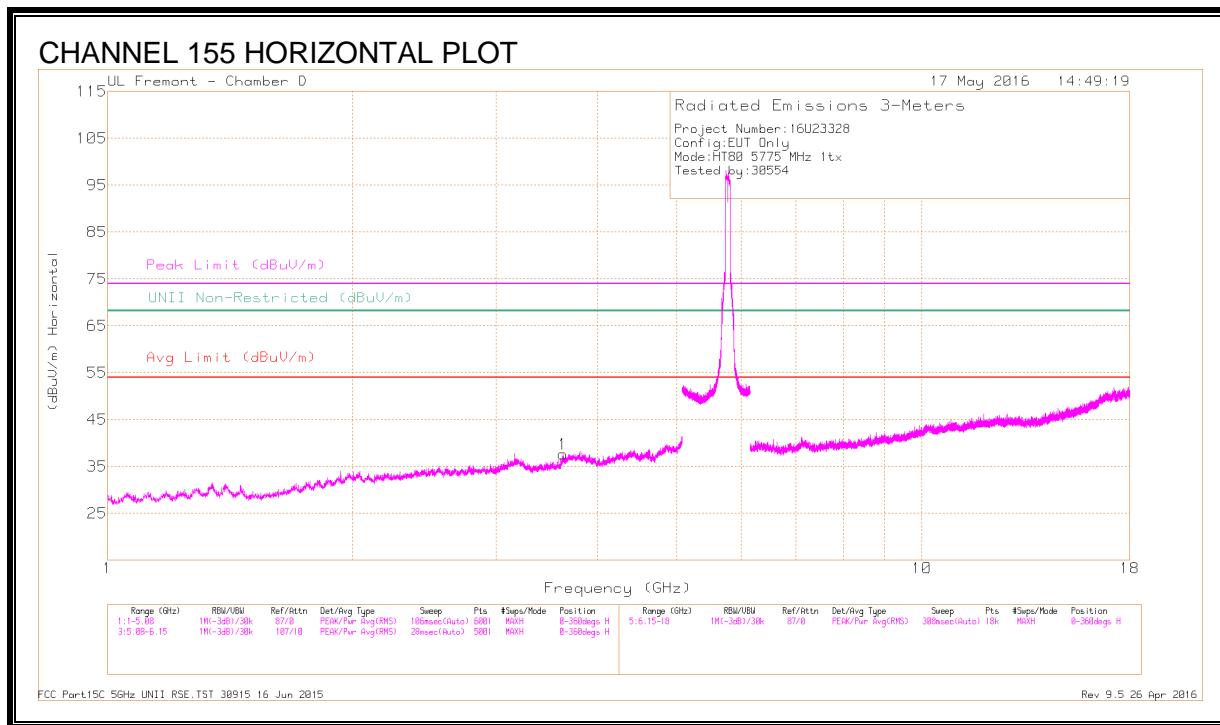
Pk - Peak detector



DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647	-58.45	Pk	34.8	-20	11.8	-31.85	-27	-4.85	89	228	V
1	5.725	-45.78	Pk	34.9	-20.1	11.8	-19.18	26.97	-46.15	89	228	V

Pk - Peak detector

CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS

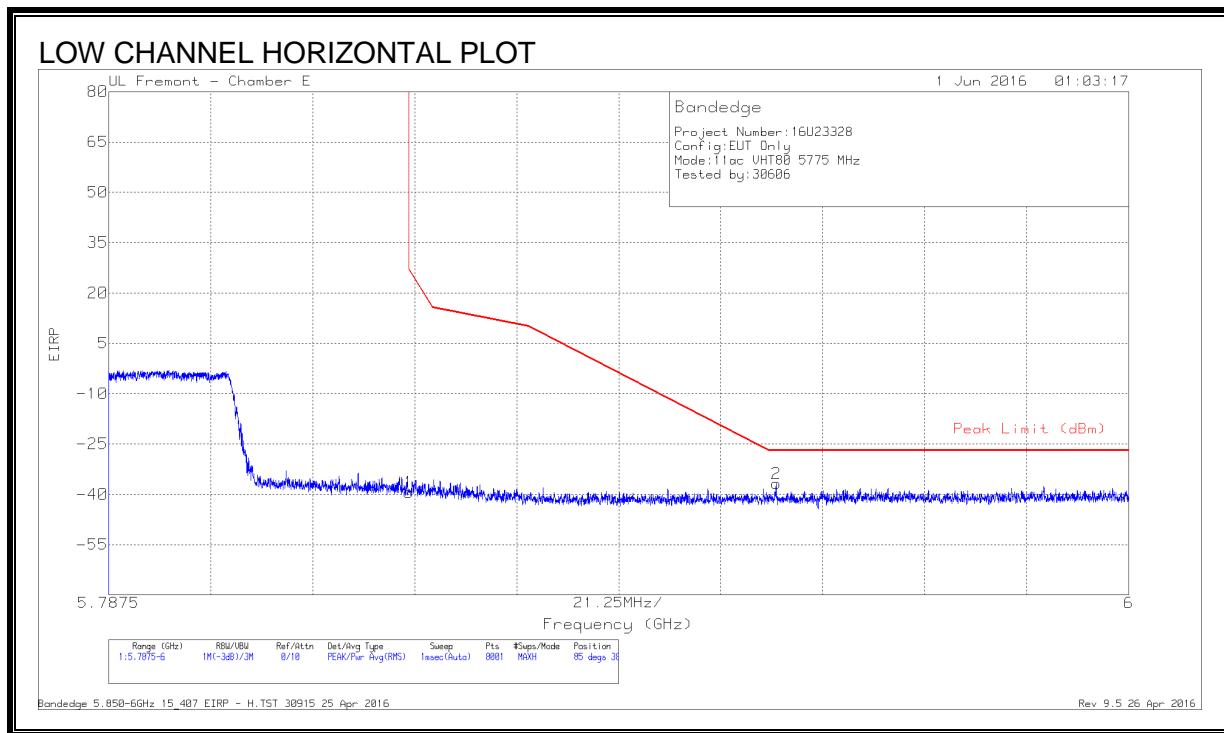
DATA

Markers	Frequency (GHz)	Meter Reading (dBuV/m)	Det	AF T712 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.623	38.19	PK-U	33.4	-28.8	0	42.79	-	-	74	-31.21	-	-	279	264	H
	* 3.627	27.93	ADR	33.4	-28.8	.16	32.69	54	-21.31	-	-	-	-	279	264	H
2	* 3.680	38.74	PK-U	33.5	-29	0	43.24	-	-	74	-30.76	-	-	311	188	V
	* 3.69	28.09	ADR	33.5	-29	.16	32.75	54	-21.25	-	-	-	-	311	188	V
3	* 4.861	36.8	PK-U	34.1	-25.2	0	45.7	-	-	74	-28.3	-	-	22	378	V
	* 4.86	26.67	ADR	34.1	-25.2	.16	35.73	54	-18.27	-	-	-	-	22	378	V
4	* 7.409	35.73	PK-U	35.6	-24.8	0	46.53	-	-	74	-27.47	-	-	234	227	V
	* 7.409	25.32	ADR	35.6	-24.8	.16	36.28	54	-17.72	-	-	-	-	234	227	V
5	* 7.571	35.66	PK-U	35.8	-25	0	46.46	-	-	74	-27.54	-	-	356	314	V
	* 7.572	25.56	ADR	35.8	-25	.16	36.52	54	-17.48	-	-	-	-	356	314	V
6	* 8.363	35.05	PK-U	35.8	-23.2	0	47.65	-	-	74	-26.35	-	-	8	141	V
	* 8.36	24.59	ADR	35.8	-23.2	.16	37.35	54	-16.65	-	-	-	-	8	141	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

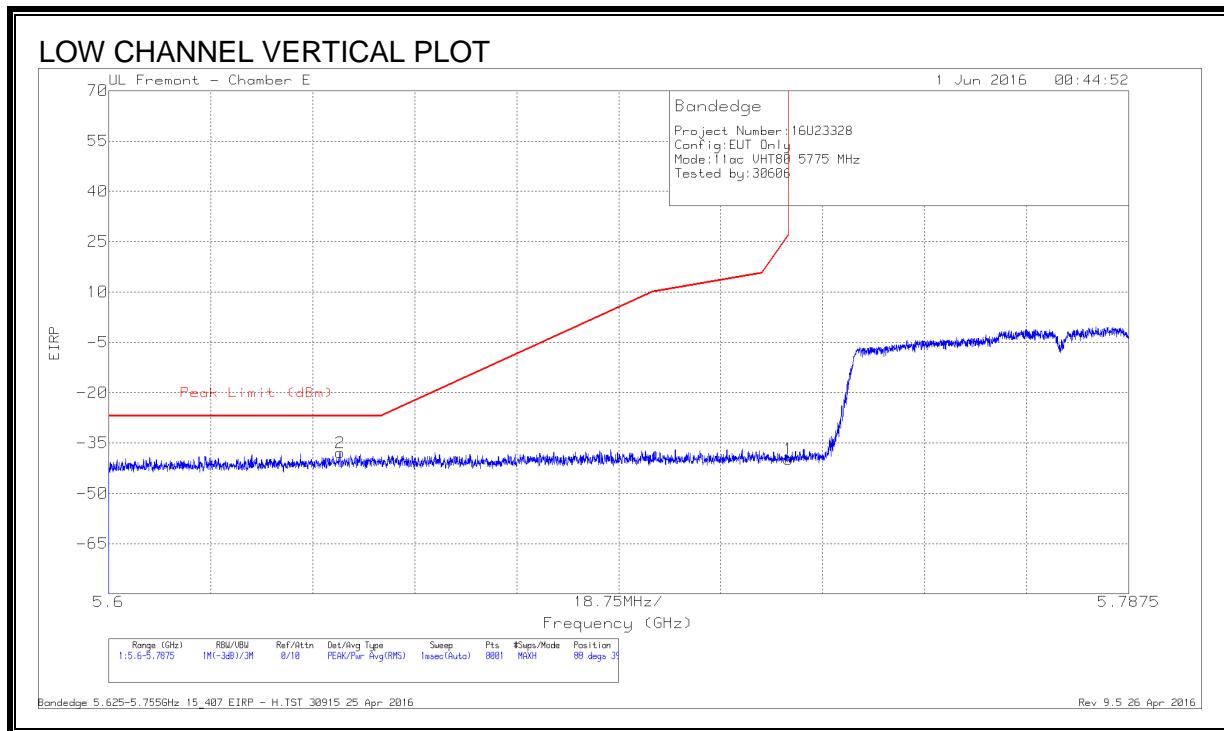
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

RESTRICTED BANEDGE, CHAIN 1 (LOW)**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.8	Pk	34.9	-20.3	11.8	0	-39.4	26.99	-66.39	85	388	H
2	5.927	-63.27	Pk	35	-20.3	11.8	0	-36.77	-27	-9.77	85	388	H

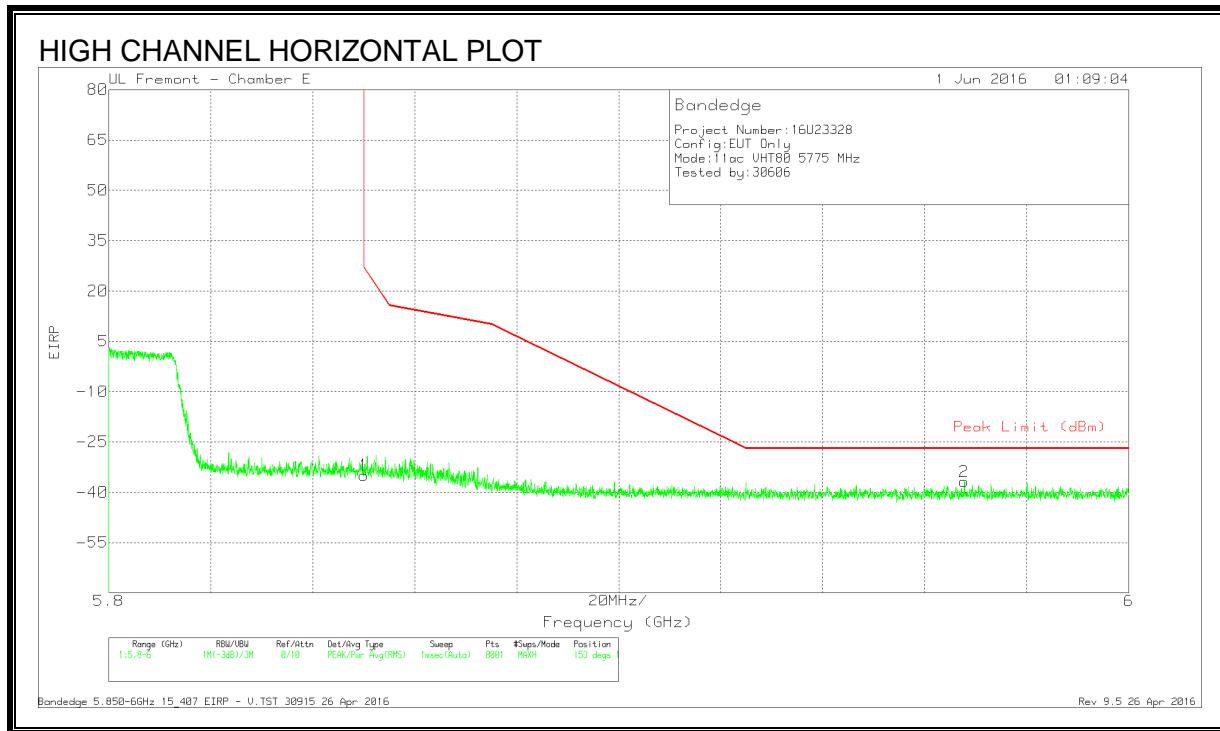
Pk - Peak detector



DATA

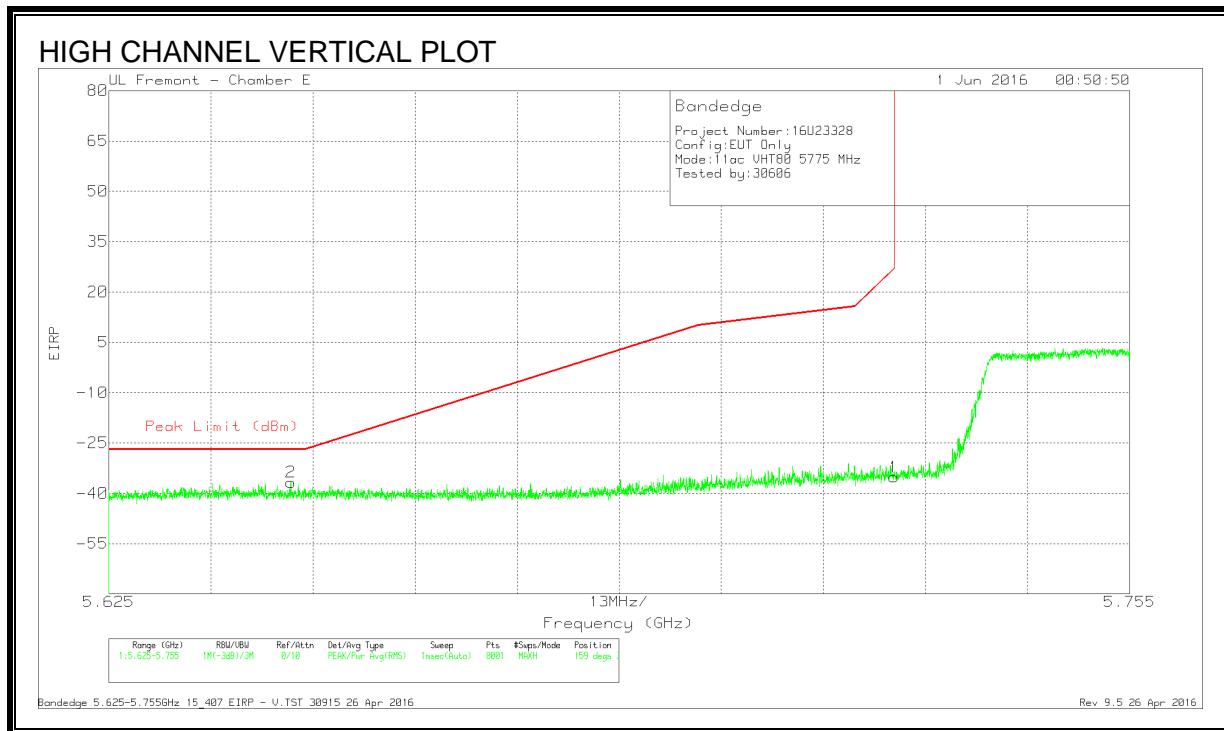
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.643	-64.61	Pk	34.8	-19.9	11.8	0	-37.91	-27	-10.91	88	391	H
1	5.725	-66.37	Pk	34.9	-20.1	11.8	0	-39.77	26.99	-66.76	88	391	H

Pk - Peak detector

RESTRICTED BANEDGE, CHAIN 1 (HIGH)**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-61.3	Pk	34.9	-20.3	11.8	0	-34.9	26.94	-61.84	153	127	V
2	5.968	-63.37	Pk	35	-20.2	11.8	0	-36.77	-27	-9.77	153	127	V

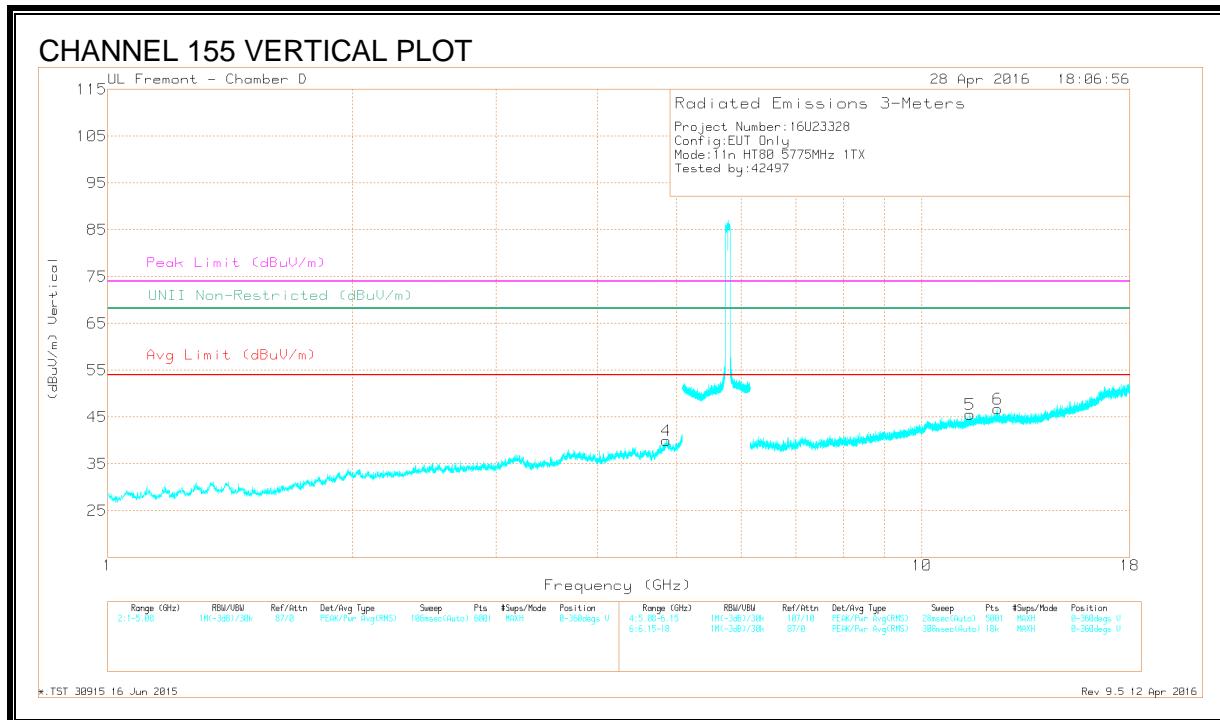
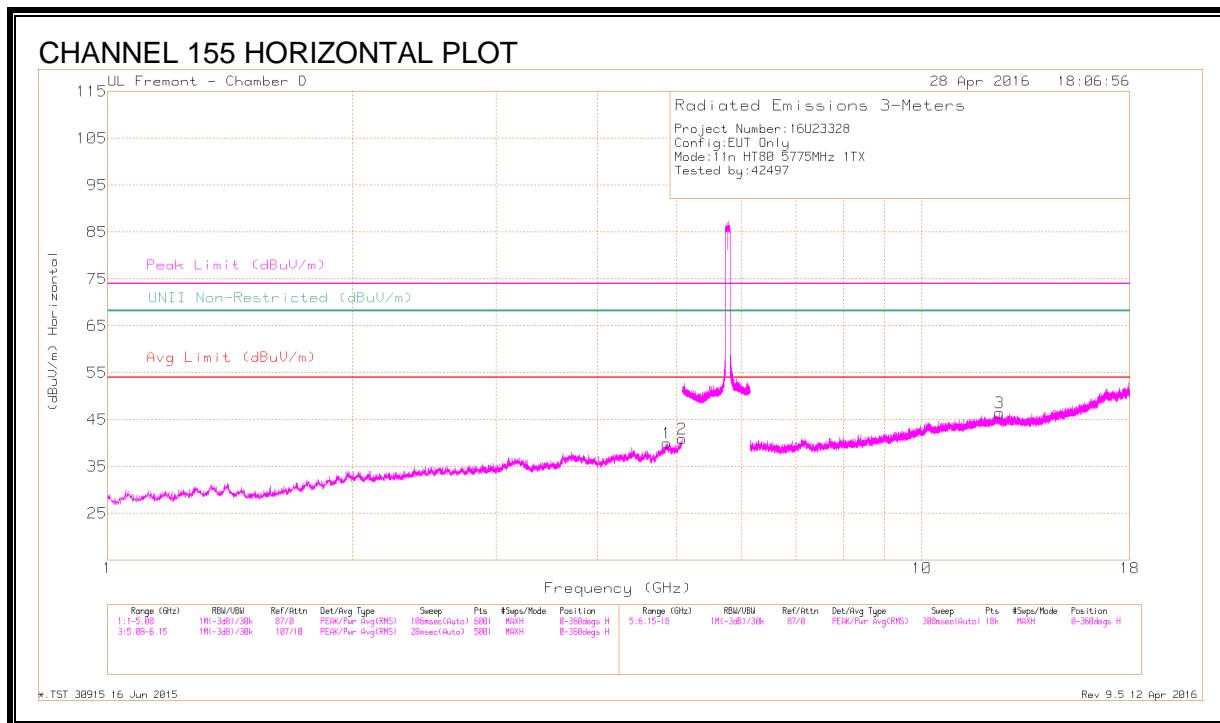
Pk - Peak detector



DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648	-63.3	Pk	34.8	-20	11.8	0	-36.7	-27	-9.7	159	370	V
1	5.725	-61.74	Pk	34.9	-20.1	11.8	0	-35.14	26.97	-62.11	159	370	V

Pk - Peak detector

CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS

DATA

Marker	Frequency (GHz)	Meter Reading (dBuv)	Det	AF T732 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuv/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
1	* 4.863	36.91	PK-U	34.1	-25.2	0	45.81	-	-	74	-28.19	-	-	-	2	274	H
	* 4.861	26.25	ADR	34.1	-25.2	.16	35.31	54	-18.69	-	-	-	-	2	274	H	
2	* 5.079	37.74	PK-U	34	-24	0	47.74	-	-	74	-26.26	-	-	88	293	H	
	* 5.08	26.96	ADR	34	-24	.16	37.12	54	-16.88	-	-	-	-	88	293	H	
4	* 4.853	36.67	PK-U	34.1	-25.4	0	45.37	-	-	74	-28.63	-	-	227	124	V	
	* 4.853	26.34	ADR	34.1	-25.4	.16	35.20	54	-18.80	-	-	-	-	227	124	V	
3	* 12.457	34.44	PK-U	39.1	-21.1	0	52.44	-	-	74	-21.56	-	-	359	399	H	
	* 12.456	23.4	ADR	39.1	-21.1	.16	41.56	54	-12.44	-	-	-	-	359	399	H	
5	* 11.457	34	PK-U	38.4	-21.1	0	51.3	-	-	74	-22.7	-	-	30	136	V	
	* 11.459	23.18	ADR	38.4	-21.2	.16	40.54	54	-13.46	-	-	-	-	30	136	V	
6	* 12.387	34	PK-U	39	-20.6	0	52.4	-	-	74	-21.6	-	-	332	334	V	
	* 12.386	23.09	ADR	39	-20.6	.16	41.65	54	-12.35	-	-	-	-	332	334	V	

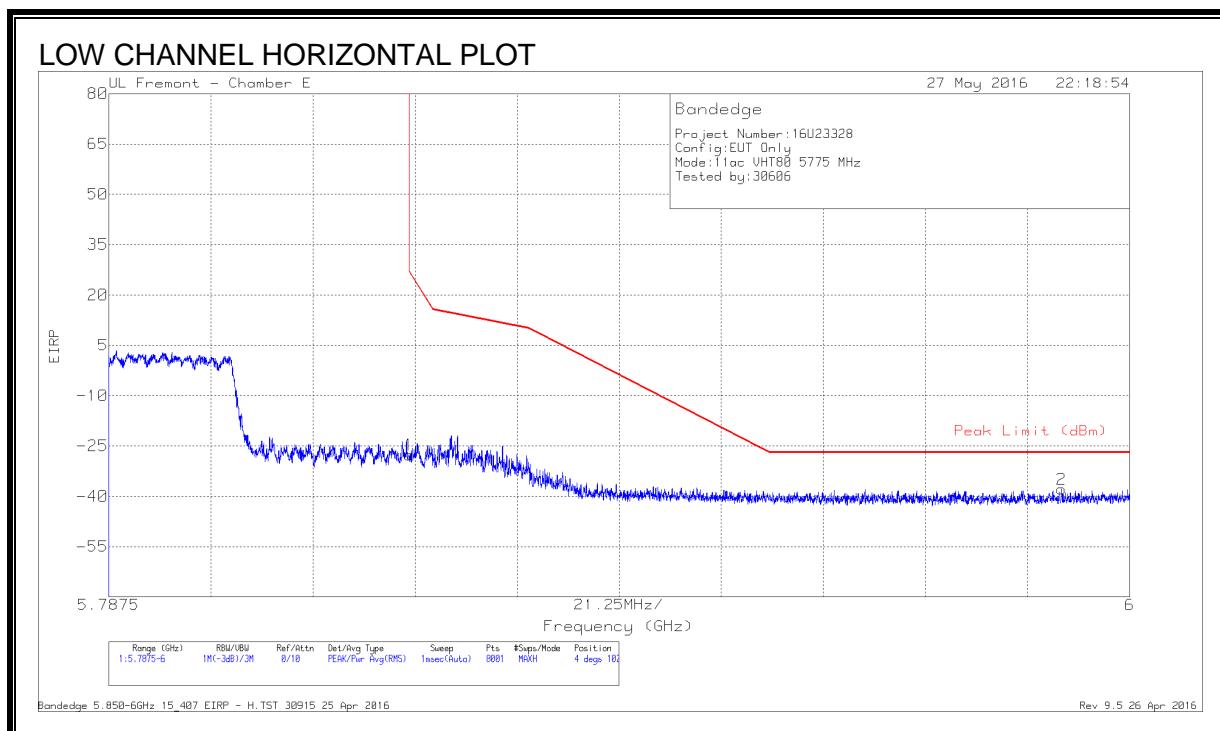
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

8.29. 802.11ac VHT80 2Tx CDD MODE IN THE 5.8 GHz BAND

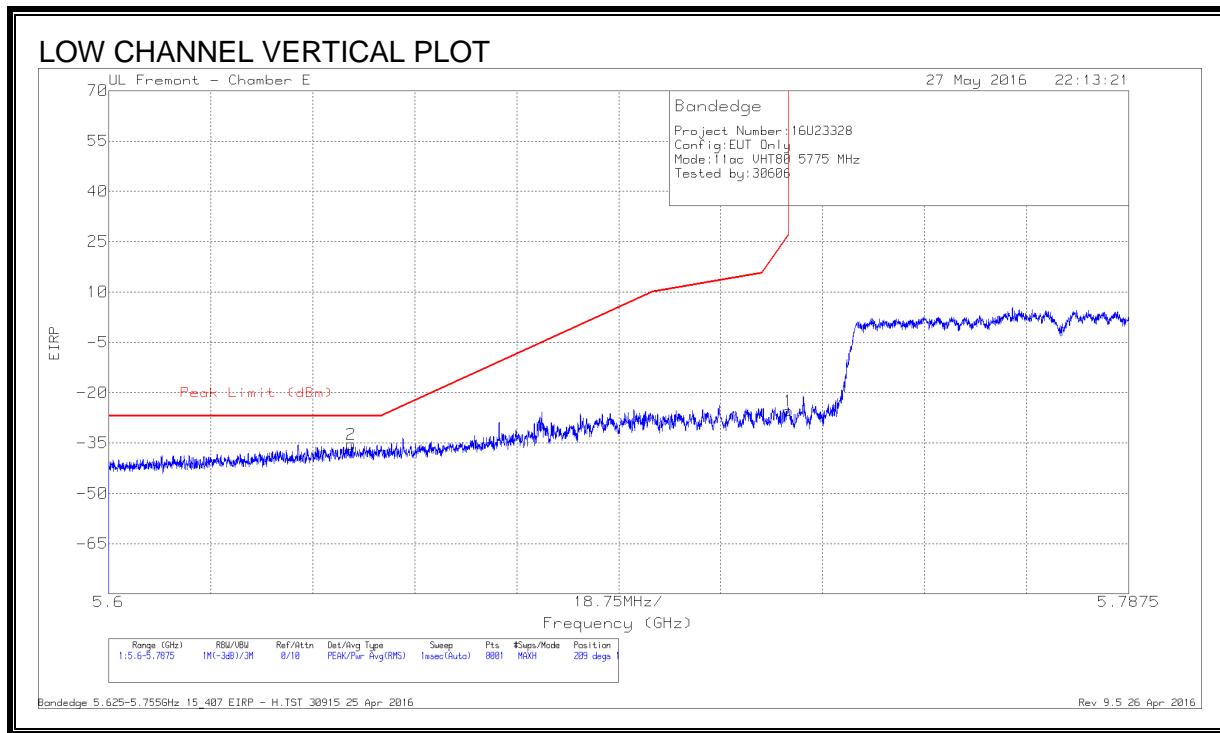
RESTRICTED BANDEDGE (LOW)



DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-54.05	Pk	34.9	-20.3	11.8	-27.65	26.99	-54.64	4	102	H
2	5.986	-64.69	Pk	35	-20	11.8	-37.89	-27	-10.89	4	102	H

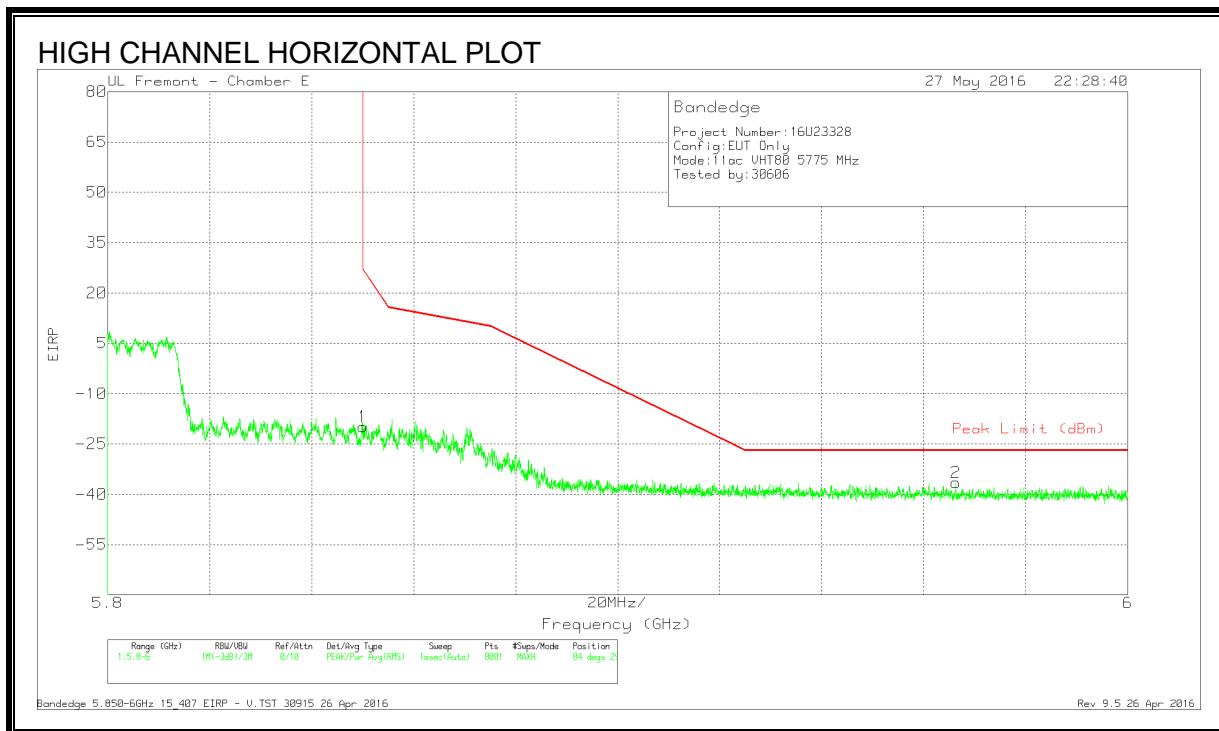
Pk - Peak detector



DATA

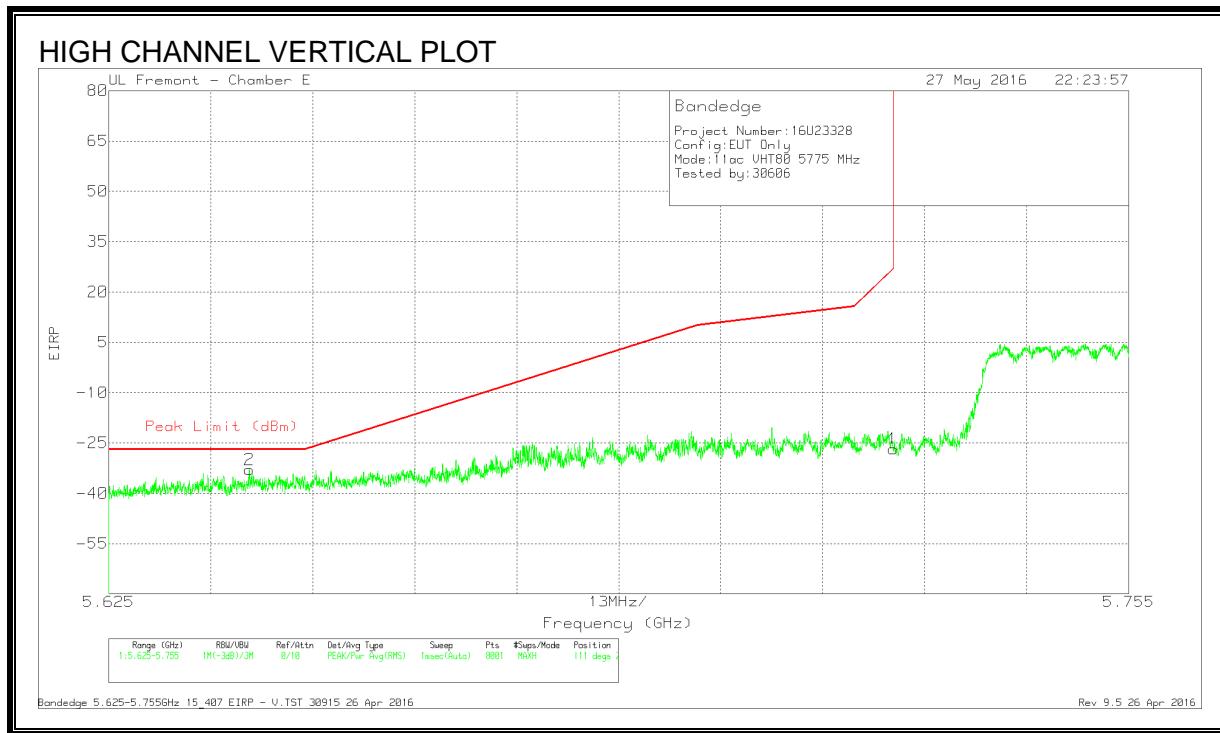
Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.645	-62.12	Pk	34.8	-19.9	11.8	-35.42	-27	-8.42	209	107	H
1	5.725	-52.01	Pk	34.9	-20.1	11.8	-25.41	26.99	-52.4	209	107	H

Pk - Peak detector

RESTRICTED BANEDGE (HIGH)**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-46.25	Pk	34.9	-20.3	11.8	-19.85	26.94	-46.79	84	299	V
2	5.966	-63.1	Pk	35	-20.2	11.8	-36.5	-27	-9.5	84	299	V

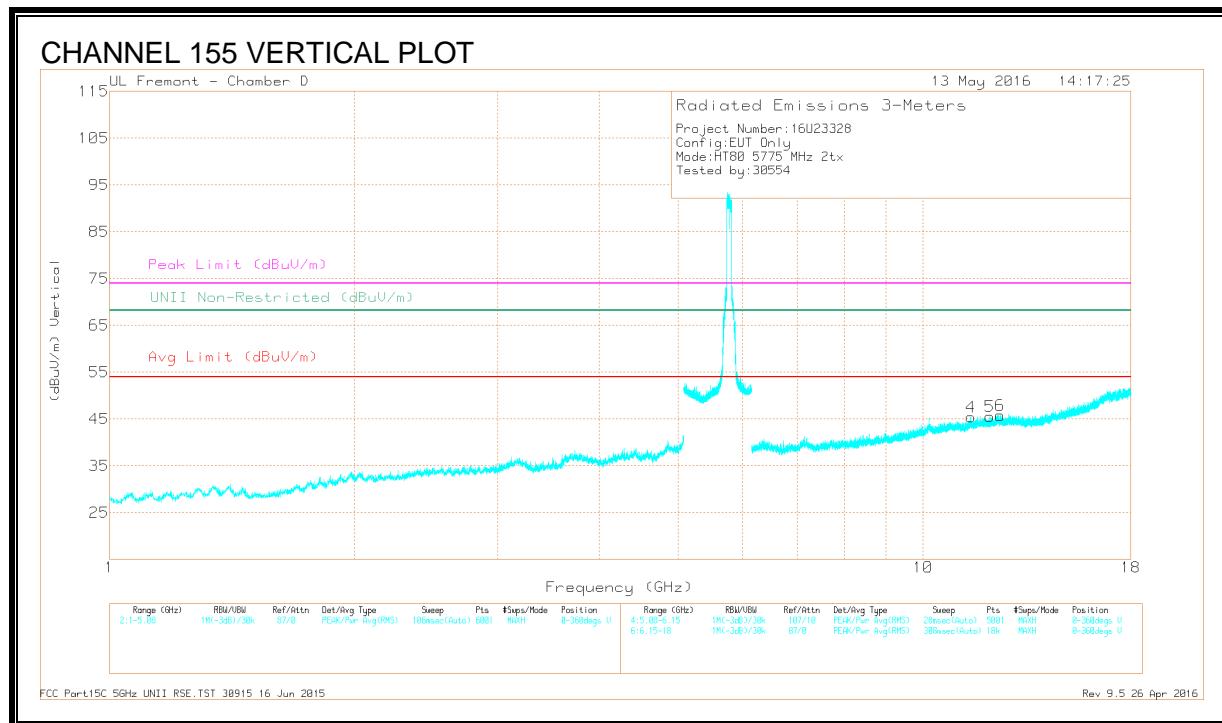
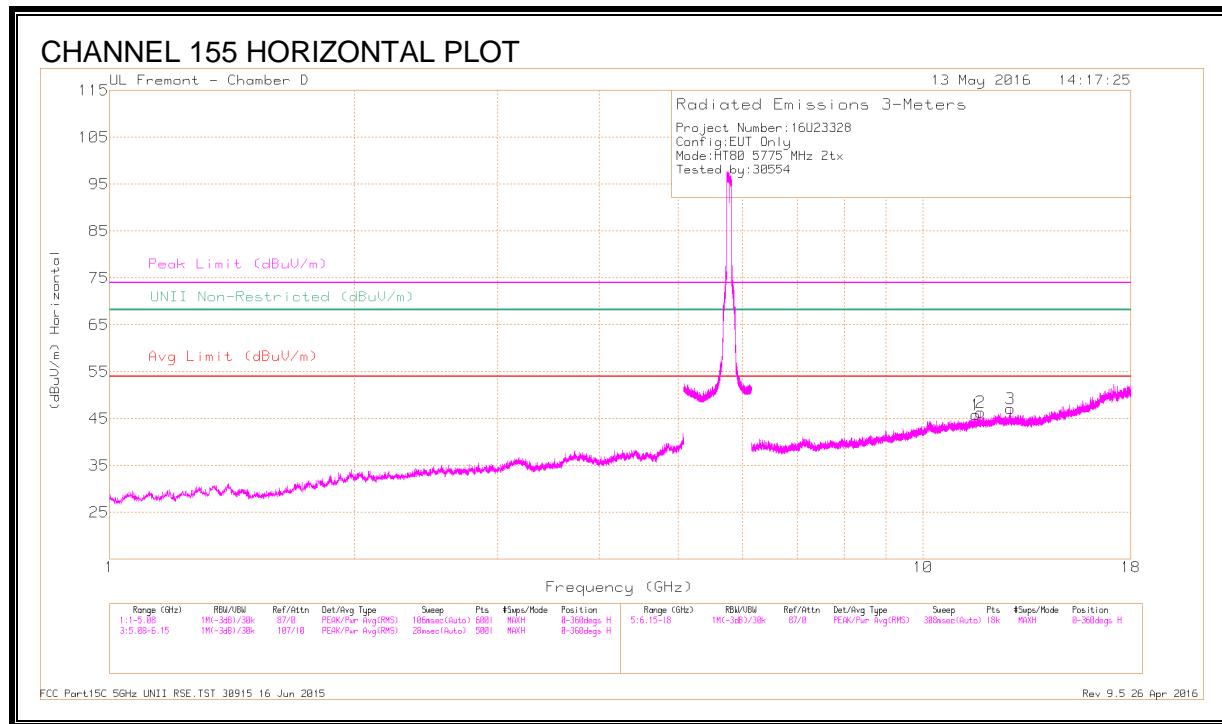
Pk - Peak detector



DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.643	-59.6	Pk	34.8	-19.9	11.8	-32.9	-27	-5.9	111	248	V
1	5.725	-53.33	Pk	34.9	-20.1	11.8	-26.73	26.97	-53.7	111	248	V

Pk - Peak detector

CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS

DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*11.616	34.22	PK-U	38.5	-20.9	0	51.82	-	-	74	-22.18	-	-	127	384	H
	*11.617	23.46	ADR	38.5	-20.9	.2	41.26	54	-12.74	-	-	-	-	127	384	H
2	*11.758	33.31	PK-U	38.7	-20.9	0	51.11	-	-	74	-22.89	-	-	294	157	H
	*11.76	23.47	ADR	38.7	-20.9	.2	41.47	54	-12.53	-	-	-	-	294	157	H
4	*11.445	34.62	PK-U	38.3	-21	0	51.92	-	-	74	-22.08	-	-	45	254	V
	*11.445	23.66	ADR	38.3	-21	.2	41.16	54	-12.84	-	-	-	-	45	254	V
5	*12.068	34.35	PK-U	39	-21.4	0	51.95	-	-	74	-22.05	-	-	164	188	V
	*12.069	23.75	ADR	39	-21.4	.2	41.55	54	-12.45	-	-	-	-	164	188	V
6	*12.427	34	PK-U	39.1	-21.3	0	51.8	-	-	74	-22.2	-	-	313	234	V
	*12.426	24.1	ADR	39.1	-21.2	.2	42.2	54	-11.8	-	-	-	-	313	234	V
3	12.811	34.55	PK-U	39.2	-21.4	0	52.35	-	-	-	-	68.2	-15.85	90	111	H
	12.814	24.29	ADR	39.2	-21.5	.2	42.19	-	-	-	-	-	-	90	111	H

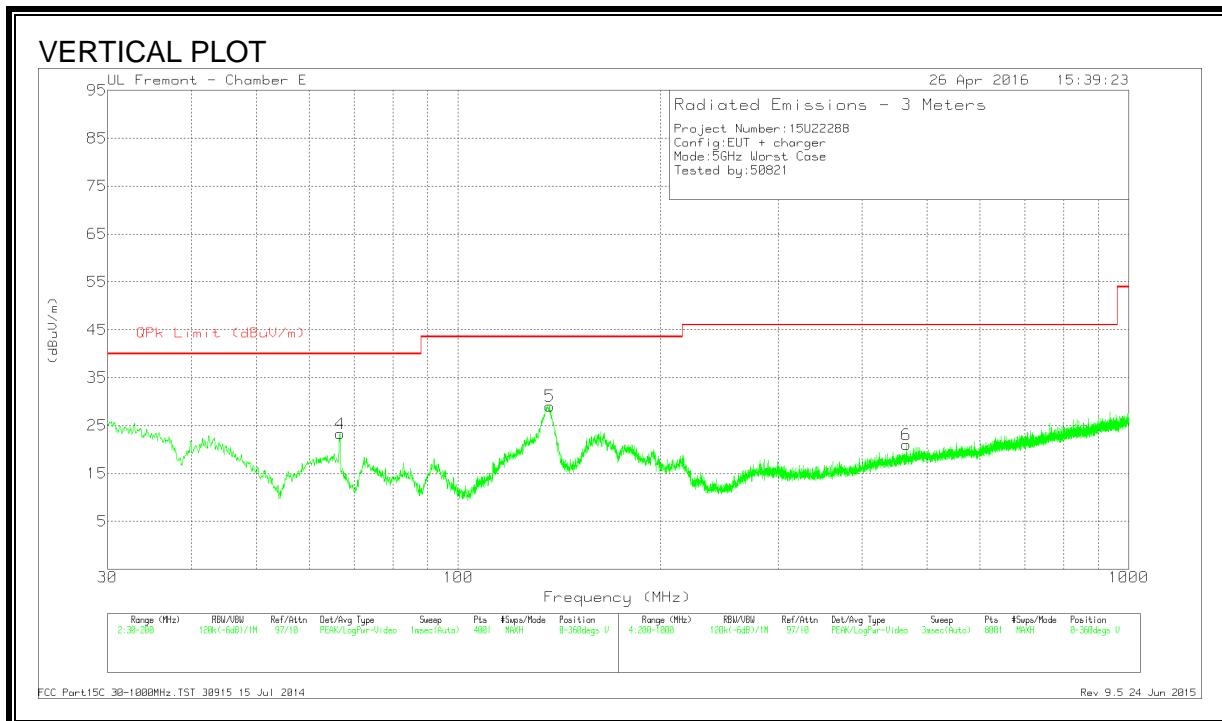
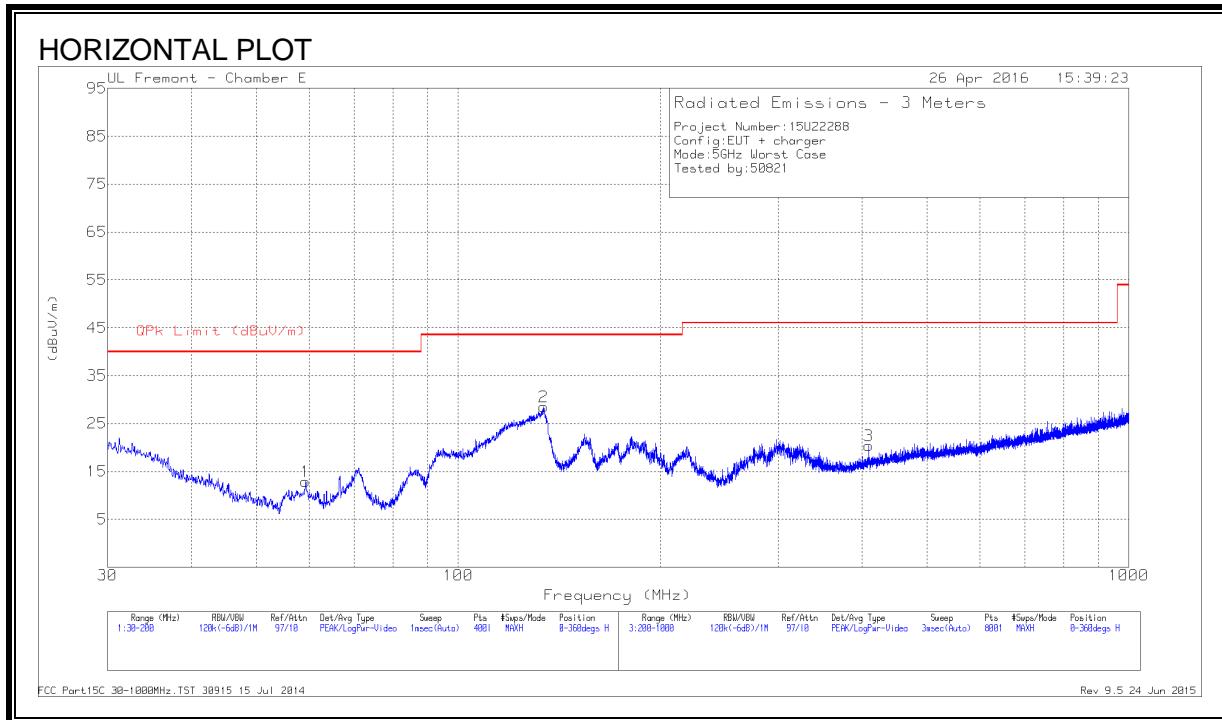
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

8.29.1. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)



HORIZONTAL AND VERTICAL DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 134.1675	42	Pk	17.6	-31.1	28.5	43.52	-15.02	0-360	201	H
5	* 136.845	42.79	Pk	17.4	-31.1	29.09	43.52	-14.43	0-360	100	V
3	* 409.1	30.15	Pk	20	-29.8	20.35	46.02	-25.67	0-360	100	H
1	59.24	33.26	Pk	11.3	-31.7	12.86	40	-27.14	0-360	401	H
4	66.635	42.91	Pk	11.9	-31.5	23.31	40	-16.69	0-360	100	V
6	466.2	29.67	Pk	21.1	-29.7	21.07	46.02	-24.95	0-360	99	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

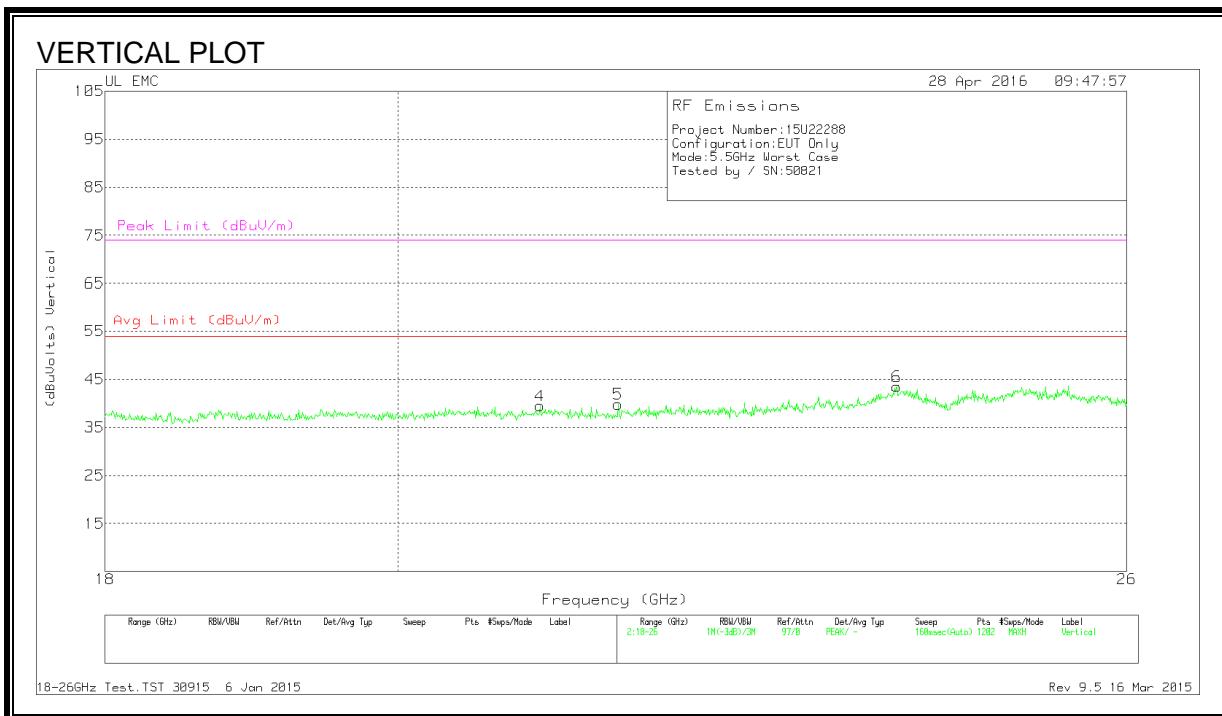
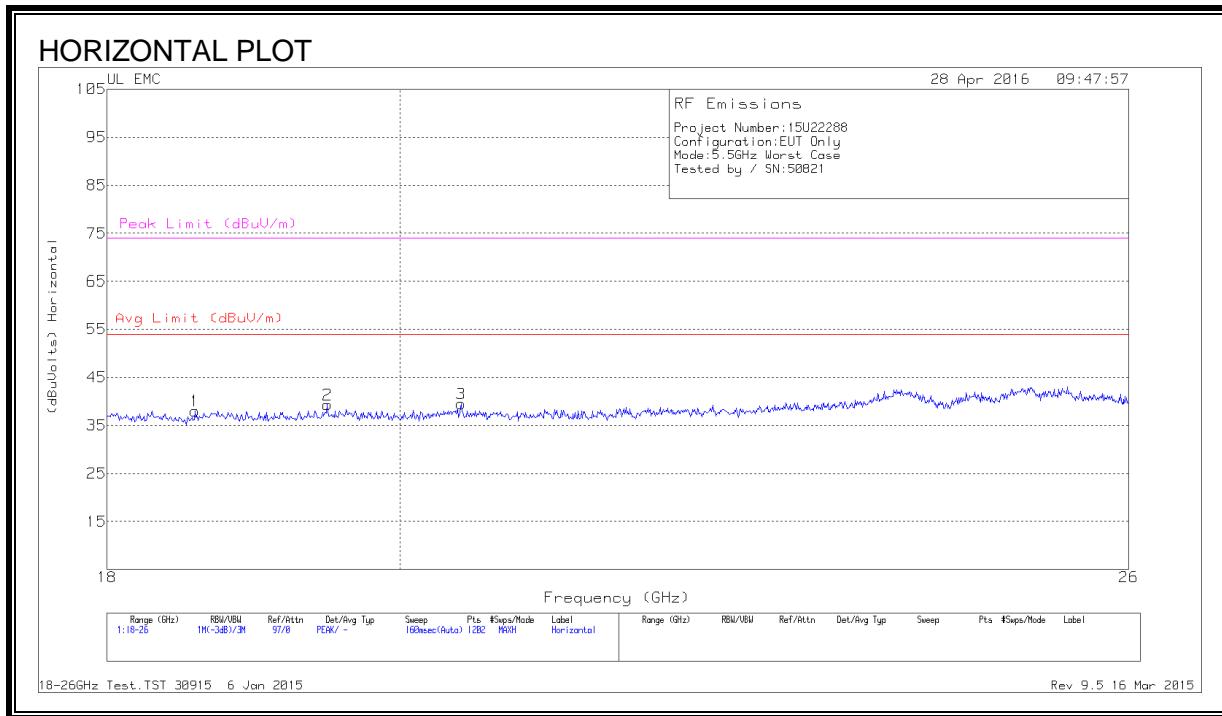
Pk - Peak detector

FCC Part15C 30-1000MHz.TST 30915 15 Jul 2014

Rev 9.5 24 Jun 2015

8.30. WORST-CASE ABOVE 18 GHz

SPURIOUS EMISSIONS 18000 TO 26000 MHz (WORST-CASE CONFIGURATION)



HORIZONTAL AND VERTICAL DATA

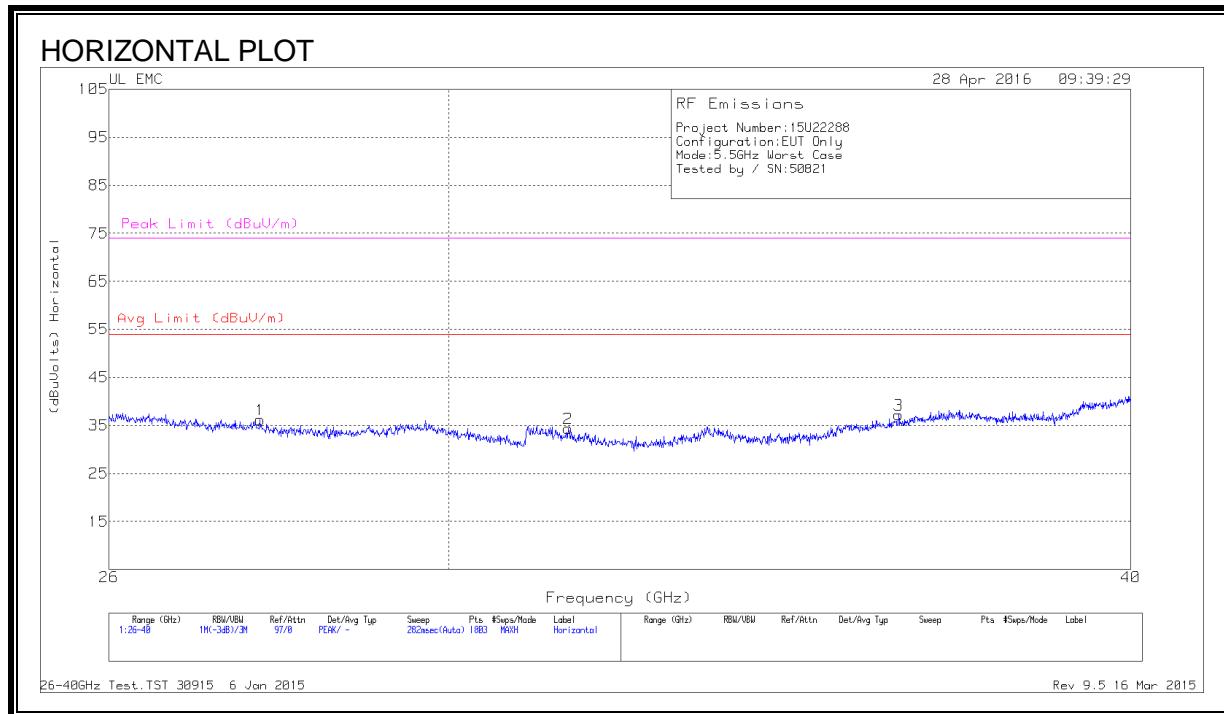
Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T477 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.58	40.4	Pk	32.3	-25.2	-9.5	38	54	-16.0	74	-36.0
2	19.485	41.23	Pk	32.6	-25	-9.5	39.3	54	-14.7	74	-34.7
3	20.445	41.1	Pk	33	-25.1	-9.5	39.5	54	-14.5	74	-34.5
4	21.051	41.4	Pk	32.9	-25.3	-9.5	39.5	54	-14.5	74	-34.5
5	21.65	41.53	Pk	33	-25.2	-9.5	39.8	54	-14.2	74	-34.2
6	23.935	43.4	Pk	33.7	-24.1	-9.5	43.5	54	-10.5	74	-30.5

Pk - Peak detector

18-26GHz Test.TST 30915 6 Jan 2015

Rev 9.5 16 Mar 2015

SPURIOUS EMISSIONS 26000 TO 40000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL AND VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T90 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	27.709	41.57	Pk	35.8	-31.7	-9.5	36.2	54	-17.8	74	-37.8
2	31.555	41.03	Pk	36.3	-33.5	-9.5	34.3	54	-19.7	74	-39.7
3	36.271	44.07	Pk	37.1	-34.5	-9.5	37.2	54	-16.8	74	-36.8
4	28.673	41.2	Pk	35.7	-32.4	-9.5	35	54	-19.0	74	-39.0
5	29.69	42.8	Pk	36	-32.8	-9.5	36.5	54	-17.5	74	-37.5
6	33.404	41.1	Pk	37	-33.6	-9.5	35	54	-19.0	74	-39.0

Pk - Peak detector

26-40GHz Test.TST 30915 6 Jan 2015

Rev 9.5 16 Mar 2015

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

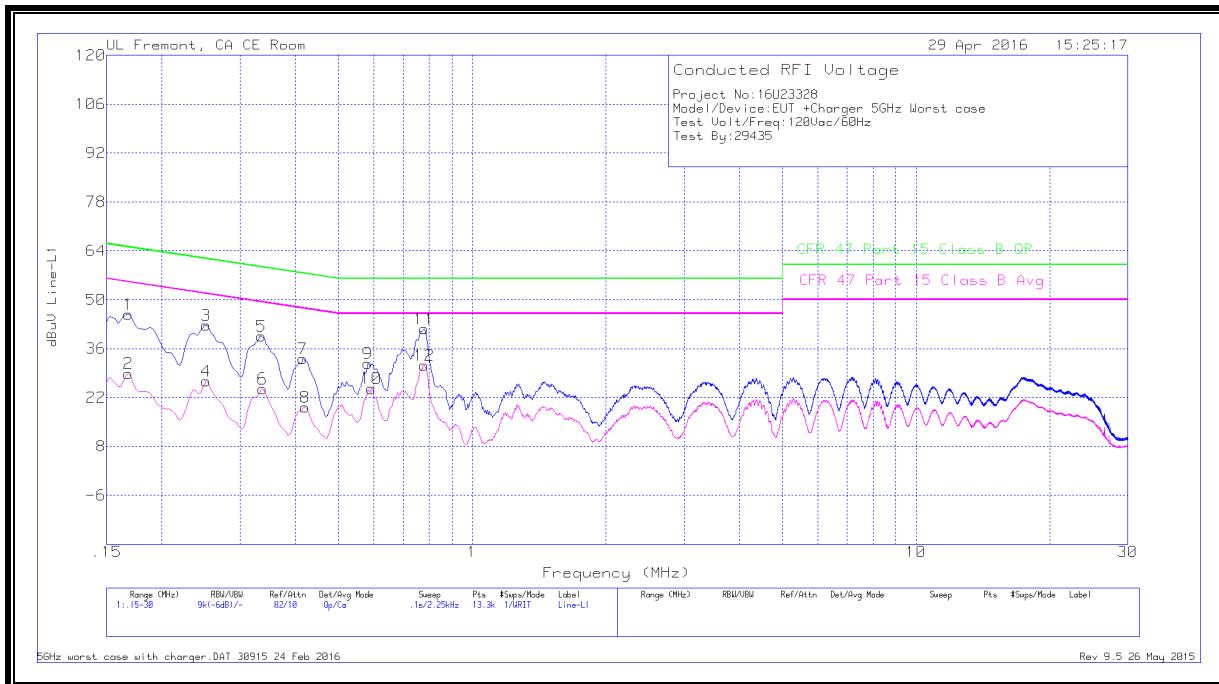
The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

9.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE

LINE 1 RESULTS



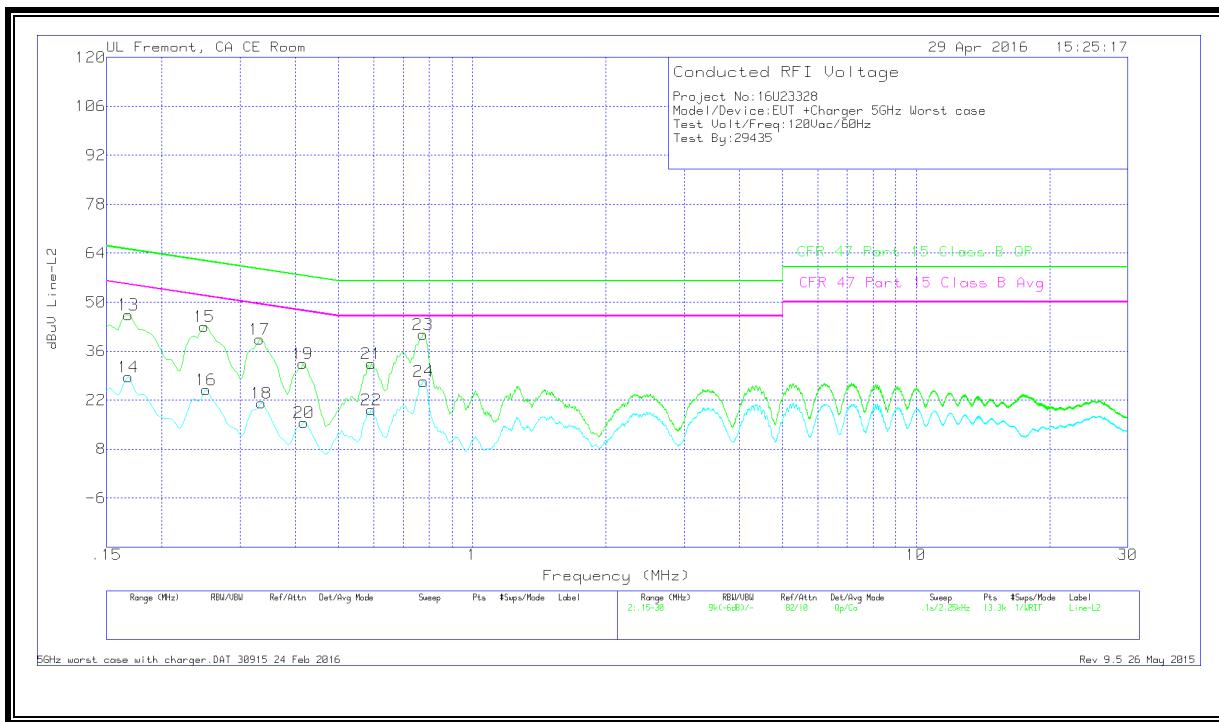
WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1	LC Cables 1&3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.168	34.55	Qp	1.2	0	10.1	45.85	65.06	-19.21	-	-
2	.168	17.58	Ca	1.2	0	10.1	28.88	-	-	55.06	-26.18
3	.25125	31.95	Qp	.7	0	10.1	42.75	61.72	-18.97	-	-
4	.25125	15.84	Ca	.7	0	10.1	26.64	-	-	51.72	-25.08
5	.3345	28.97	Qp	.5	0	10.1	39.57	59.34	-19.77	-	-
6	.33675	13.93	Ca	.5	0	10.1	24.53	-	-	49.28	-24.75
7	.4155	22.59	Qp	.4	0	10.1	33.09	57.54	-24.45	-	-
8	.42	8.68	Ca	.4	0	10.1	19.18	-	-	47.45	-28.27
9	.582	21.29	Qp	.3	0	10.1	31.69	56	-24.31	-	-
10	.59325	14.14	Ca	.3	0	10.1	24.54	-	-	46	-21.46
11	.78	31.23	Qp	.3	0	10.1	41.63	56	-14.37	-	-
12	.78	20.82	Ca	.3	0	10.1	31.22	-	-	46	-14.78

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS**WORST EMISSIONS**

Range 2: Line-L2 .15 - 30MHz

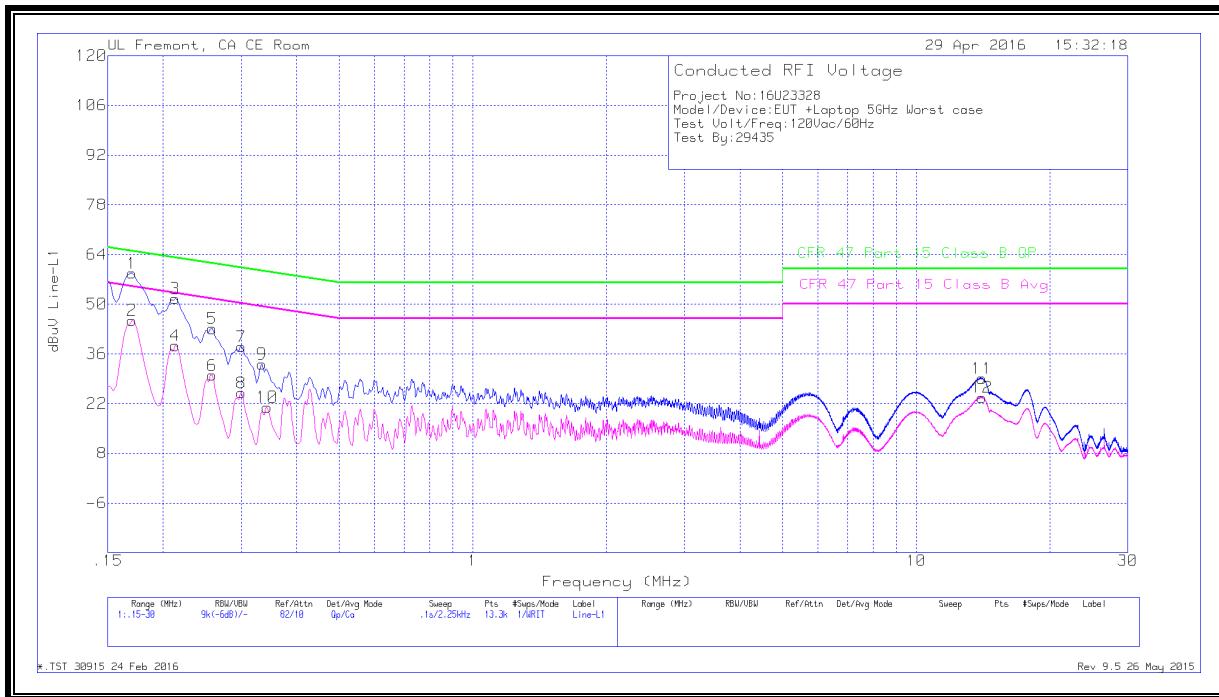
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2	LC Cables 2&3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.168	35.03	Qp	1.3	0	10.1	46.43	65.06	-18.63	-	-
14	.168	17.15	Ca	1.3	0	10.1	28.55	-	-	55.06	-26.51
15	.249	32.28	Qp	.7	0	10.1	43.08	61.79	-18.71	-	-
16	.25125	14.1	Ca	.7	0	10.1	24.9	-	-	51.72	-26.82
17	.33225	28.75	Qp	.5	0	10.1	39.35	59.39	-20.04	-	-
18	.3345	10.6	Ca	.5	0	10.1	21.2	-	-	49.34	-28.14
19	.4155	21.93	Qp	.4	0	10.1	32.43	57.54	-25.11	-	-
20	.41775	5.02	Ca	.4	0	10.1	15.52	-	-	47.49	-31.97
21	.59325	21.99	Qp	.3	0	10.1	32.39	56	-23.61	-	-
22	.59325	8.84	Ca	.3	0	10.1	19.24	-	-	46	-26.76
23	.7755	30.45	Qp	.3	0	10.1	40.85	56	-15.15	-	-
24	.77775	16.92	Ca	.3	0	10.1	27.32	-	-	46	-18.68

Qp - Quasi-Peak detector

Ca - CISPR average detection

9.2. EUT POWERED BY HOST PC VIA USB CABLE

LINE 1 RESULTS



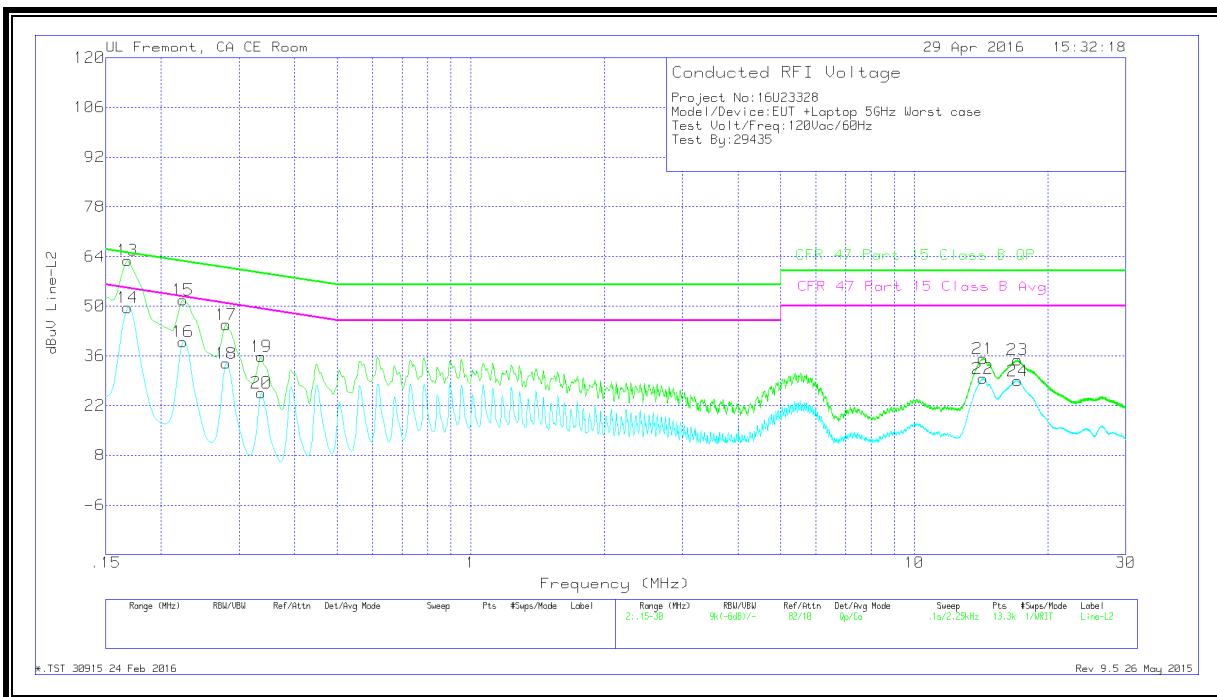
WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1	LC Cables 1&3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.17025	47.42	Qp	1.2	0	10.1	58.72	64.95	-6.23	-	-
2	.17025	34.14	Ca	1.2	0	10.1	45.44	-	-	54.95	-9.51
3	.213	40.58	Qp	.9	0	10.1	51.58	63.09	-11.51	-	-
4	.213	27.31	Ca	.9	0	10.1	38.31	-	-	53.09	-14.78
5	.258	32.3	Qp	.7	0	10.1	43.1	61.5	-18.4	-	-
6	.258	19.2	Ca	.7	0	10.1	30	-	-	51.5	-21.5
7	.30075	27.34	Qp	.6	0	10.1	38.04	60.22	-22.18	-	-
8	.30075	14.33	Ca	.6	0	10.1	25.03	-	-	50.22	-25.19
9	.3345	22.54	Qp	.5	0	10.1	33.14	59.34	-26.2	-	-
10	.3435	10.37	Ca	.5	0	10.1	20.97	-	-	49.12	-28.15
11	14.07525	18.47	Qp	.2	.2	10.2	29.07	60	-30.93	-	-
12	14.07525	13.15	Ca	.2	.2	10.2	23.75	-	-	50	-26.25

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS**WORST EMISSIONS**

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2	LC Cables 2&3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.168	51.51	Qp	1.3	0	10.1	62.91	65.06	-2.15	-	-
14	.168	38.21	Ca	1.3	0	10.1	49.61	-	-	55.06	-5.45
15	.22425	40.75	Qp	.9	0	10.1	51.75	62.66	-10.91	-	-
16	.22425	29	Ca	.9	0	10.1	40	-	-	52.66	-12.66
17	.2805	34.12	Qp	.6	0	10.1	44.82	60.8	-15.98	-	-
18	.2805	23.24	Ca	.6	0	10.1	33.94	-	-	50.8	-16.86
19	.33675	25.24	Qp	.5	0	10.1	35.84	59.28	-23.44	-	-
20	.33675	15.01	Ca	.5	0	10.1	25.61	-	-	49.28	-23.67
21	14.2755	24.64	Qp	.2	.2	10.2	35.24	60	-24.76	-	-
22	14.27438	19.03	Ca	.2	.2	10.2	29.63	-	-	50	-20.37
23	17.09025	24.08	Qp	.3	.2	10.3	34.88	60	-25.12	-	-
24	17.1105	18.14	Ca	.3	.2	10.3	28.94	-	-	50	-21.06

Qp - Quasi-Peak detector

Ca - CISPR average detection

10. DYNAMIC FREQUENCY SELECTION

10.1. OVERVIEW

10.1.1. LIMITS

FCC

§15.407 (h), FCC KDB 905462 D02 "COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION" and KDB 905462 D03 "U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY".

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (without DFS)	Client (with DFS)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar DFS	Client (without DFS)
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequency between the bonded 20 MHz channel blocks.

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see notes)
E.I.R.P. \geq 200 milliwatt	-64 dBm
E.I.R.P. < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
E.I.R.P. < 200 milliwatt that do not meet power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.
Note 3: E.I.R.P. is based on the highest antenna gain. For MIMO devices refer to KDB publication 662911 D01.

Table 4: DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds (See Note 1)
<i>Channel Closing Transmission Time</i>	200 milliseconds + approx. 60 milliseconds over remaining 10 second period. (See Notes 1 and 2)
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. (See Note 3)

Note 1: *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel move* (an aggregate of 60 milliseconds) during the remainder of the 10-second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (usec)	PRI (usec)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in table 5a	Roundup: $\{(1/360) \times (19 \times 10^6 \text{ PRI}_{\text{usec}})\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 usec. With a minimum increment of 1 usec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the <i>Detection Bandwidth</i> test, <i>Channel Move Time</i> , and <i>Channel Closing Time</i> tests.					

Table 6 – Long Pulse Radar Test Signal

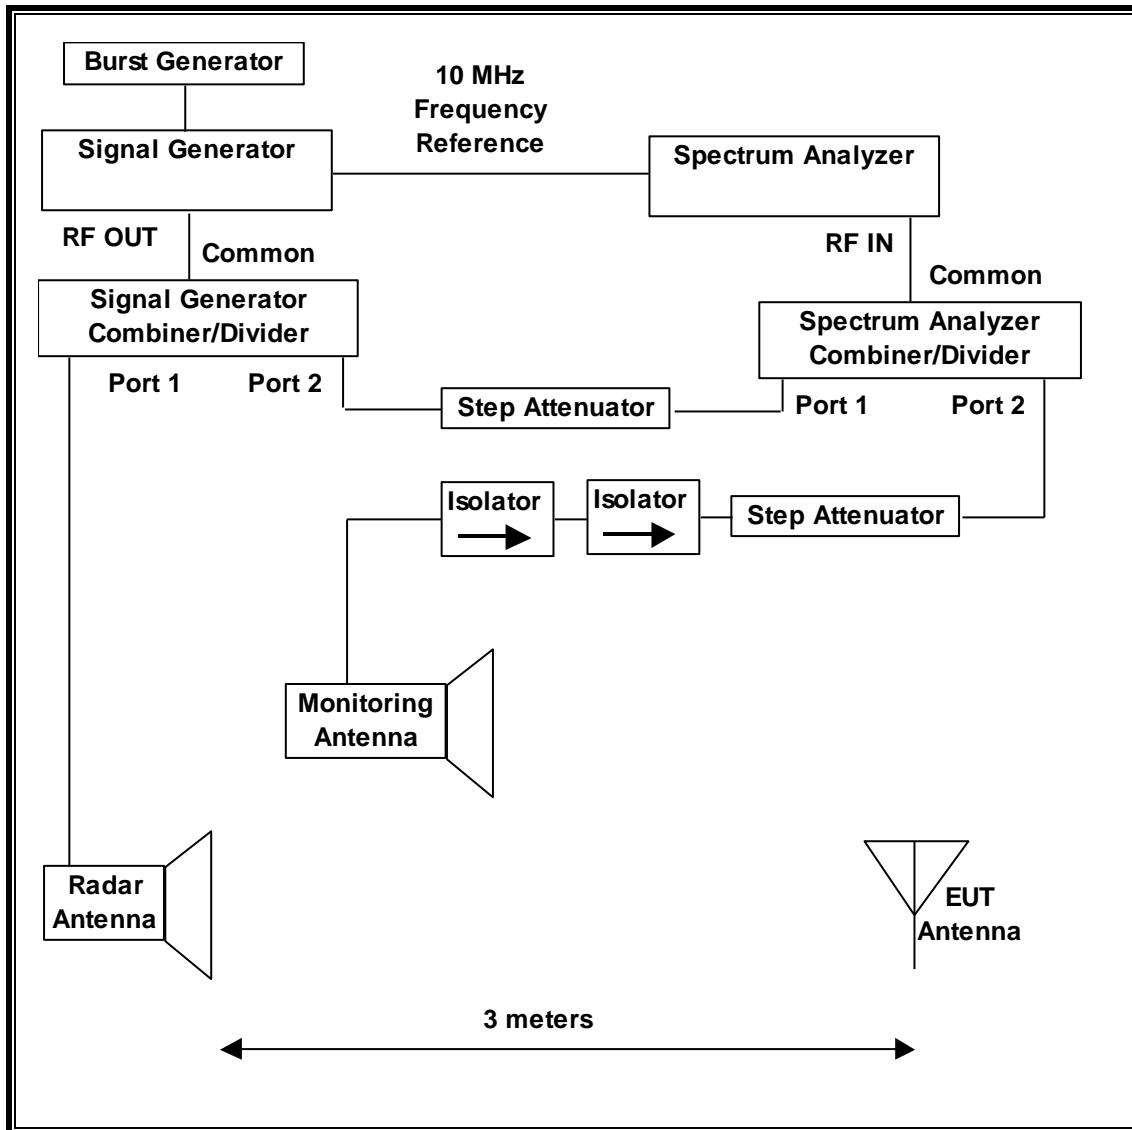
Radar Waveform Type	Pulse Width (usec)	Chirp Width (MHz)	PRI (usec)	Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform Type	Pulse Width (usec)	PRI (usec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

10.1.2. TEST AND MEASUREMENT SYSTEM

RADIATED METHOD SYSTEM BLOCK DIAGRAM



SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of KDB 905462 D02. The frequency of the signal generator is incremented in 1 MHz steps from F_L to F_H for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset Number	Cal Due
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	US51350187	06/01/16
Signal Generator, MXG X-Series RF Vector	Agilent	N5172B	MY51350128	04/06/17
Signal Generator, MXG X-Series RF Vector	Agilent	N5172B	MY51350337	03/11/17

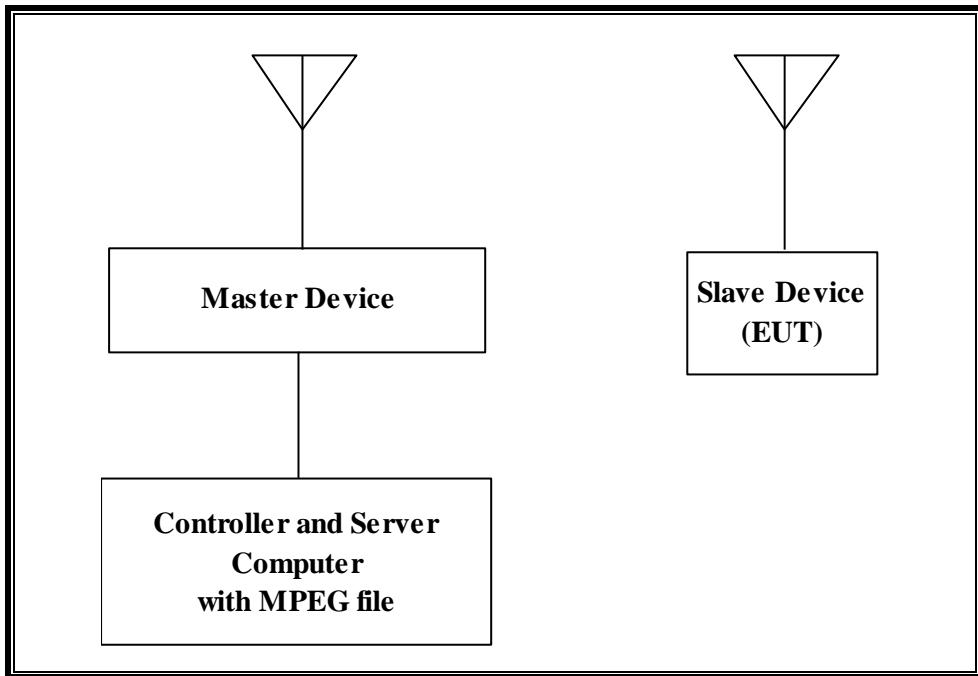
10.1.3. TEST AND MEASUREMENT SOFTWARE

The following test and measurement software was utilized for the tests documented in this report:

TEST SOFTWARE LIST		
Name	Version	Test / Function
Aggregate Time-PXA	2.0.0.6	Channel Loading and Aggregate Closing Time
PXA Read	3.0.0.7	Signal Generator Screen Capture
SGXProject.exe	2	Radar Waveform Generation and Download

10.1.4. **SETUP OF EUT (CLIENT MODE)**

RADIATED METHOD EUT TEST SETUP



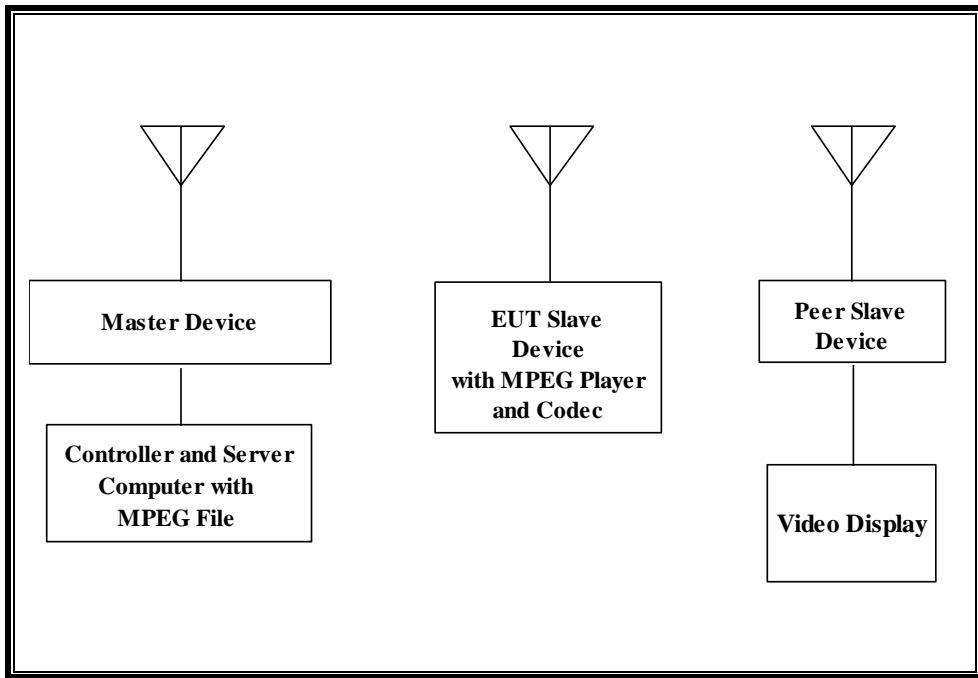
SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
3x3 MIMO Base Station (Master Device)	Apple	A1521	C86PJ60JFJ1R	BCGA1521
Notebook PC (Controller/Server)	Apple	A1181	4H629022WLV	DoC
AC Adapter (Controller/Server PC)	Delta Electronics	A1344	MV05104CNAL1A	DoC

10.1.5. **SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)**

RADIATED METHOD EUT TEST SETUP



SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
3x3 MIMO Base Station (Master Device)	Apple	A1521	C86PJ60JFJ1R	BCGA1521
Notebook PC (Controller/Server)	Apple	A1181	4H629022WLV	DoC
AC Adapter (Controller/Server PC)	Delta Electronics	A1344	MV05104CNAL1A	DoC
Apple TV (Peer Slave Device)	Apple	A1625	C07PR001GPWK	BCGA1625
Video Display	Polaroid	TLX-01511C	02006	DoC

10.1.6. DESCRIPTION OF EUT

For FCC the EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

The EUT is a Slave Device without Radar Detection.

The highest power level within these bands is 16.55 dBm EIRP in the 5250-5350 MHz band and 16.91 dBm EIRP in the 5470-5725 MHz band.

The only antenna assembly utilized with the EUT has a gain of -5.06 dBi and -5.08 dBi in the 5250-5350 MHz band and -4.78dBi and -3.10 dBi in the 5470-5725 MHz band.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.

The EUT uses two transmitter/receiver chains connected to an antenna to perform radiated tests.

In standard client mode WLAN traffic that meets or exceeds the minimum required loading was generated by streaming the compressed version of the video test file "6 ½ Magic Hours" from the Master to the Slave

In client to client mode WLAN traffic is generated by streaming the compressed version of the video test file "6 ½ Magic Hours" from the Master to the Slave and then on to the peer slave device in full motion video mode using QuickTime media player and embedded proprietary AirPlay software.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11ac architecture. Three nominal channel bandwidths are implemented: 20 MHz, 40 MHz and 80 MHz.

The software installed in the EUT is 14A200.

The software installed in the access point is 7.7.2d0 dev.

UNIFORM CHANNEL SPREADING

This function is not applicable Slave Devices.

OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS

The Master Device is an Apple, Inc. Access Point, FCC ID: BCGA1521. The minimum antenna gain for the Master Device is 1.4 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.

The software installed in the access point is 7.7.2d0 dev.

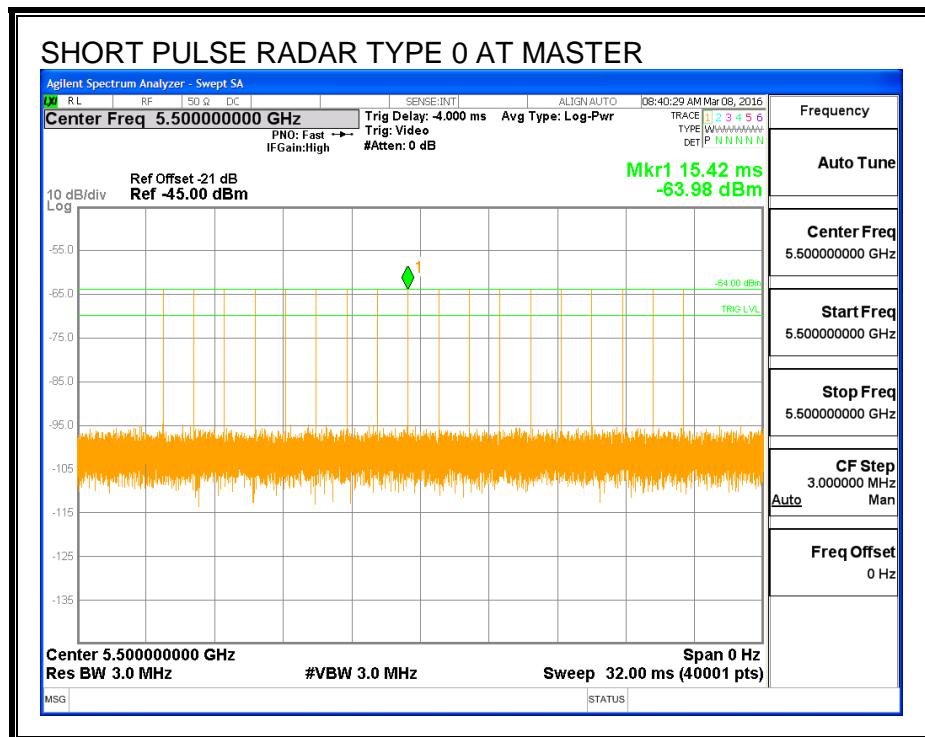
10.2. CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH

10.2.1. TEST CHANNEL

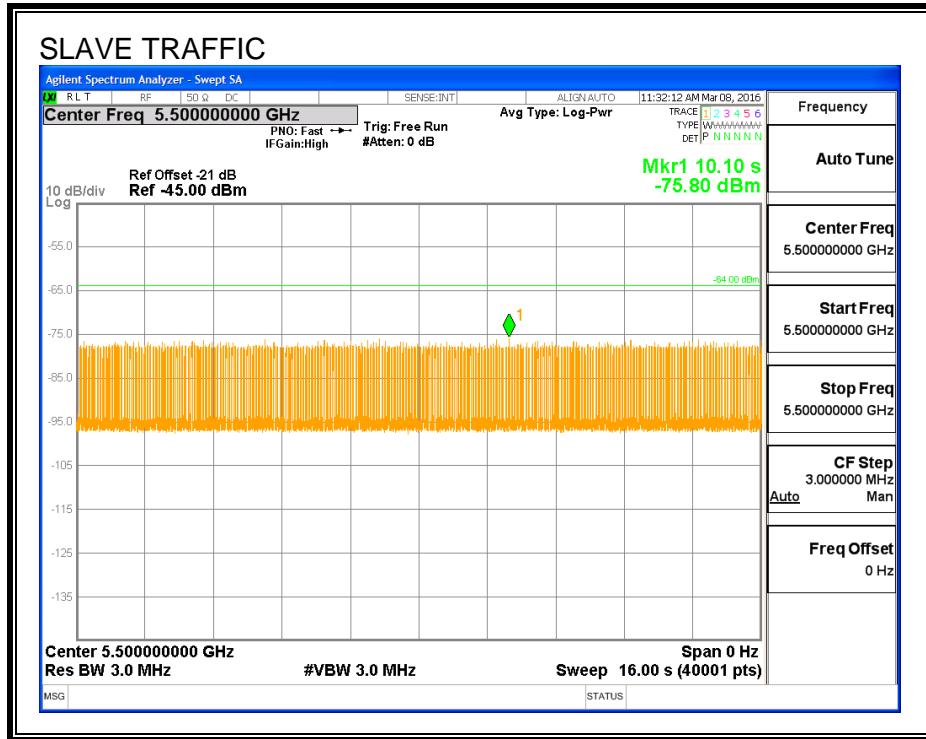
All tests were performed at a channel center frequency of 5500 MHz.

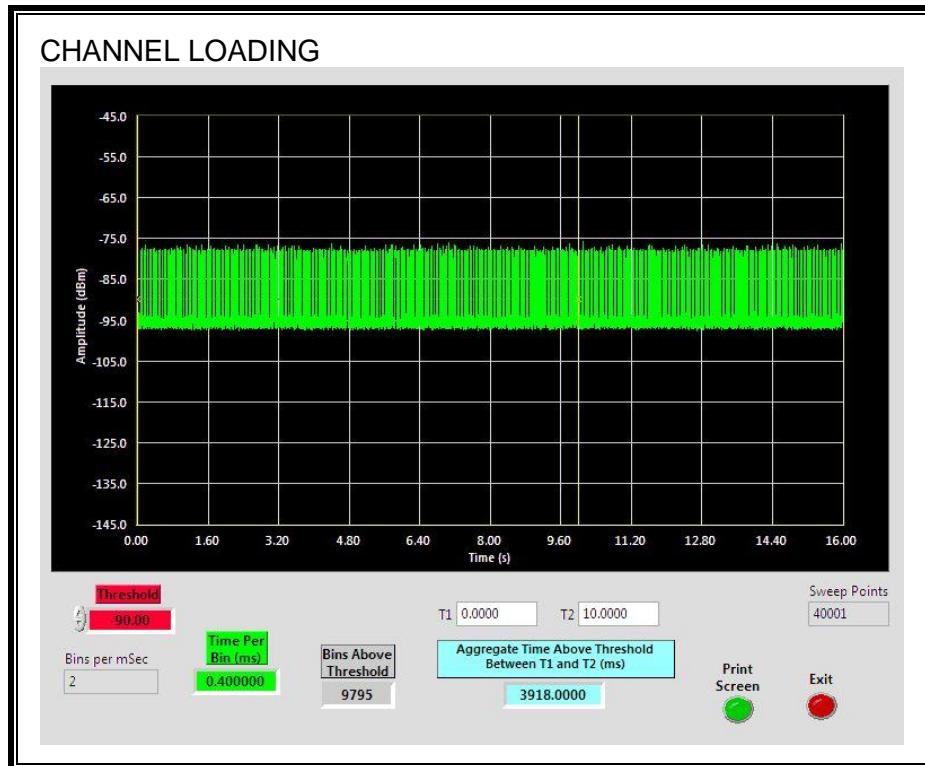
10.2.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM



TRAFFIC



CHANNEL LOADING

The level of traffic loading on the channel by the EUT is 39.18%

10.2.3. OVERLAPPING CHANNEL TESTS**RESULTS**

These tests are not applicable.

10.2.4. MOVE AND CLOSING TIME**REPORTING NOTES**

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

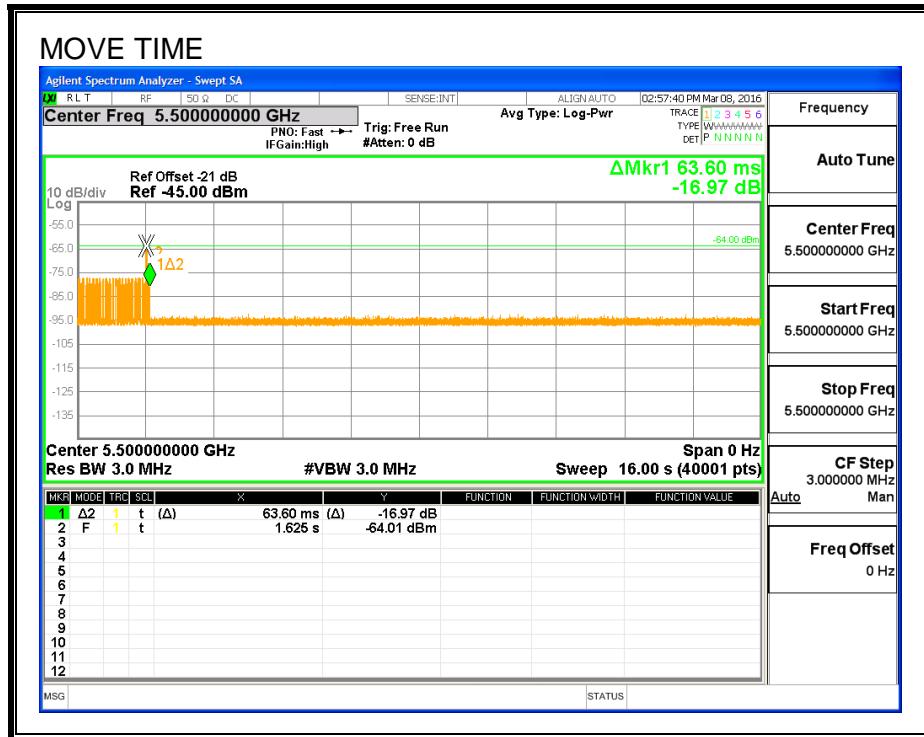
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

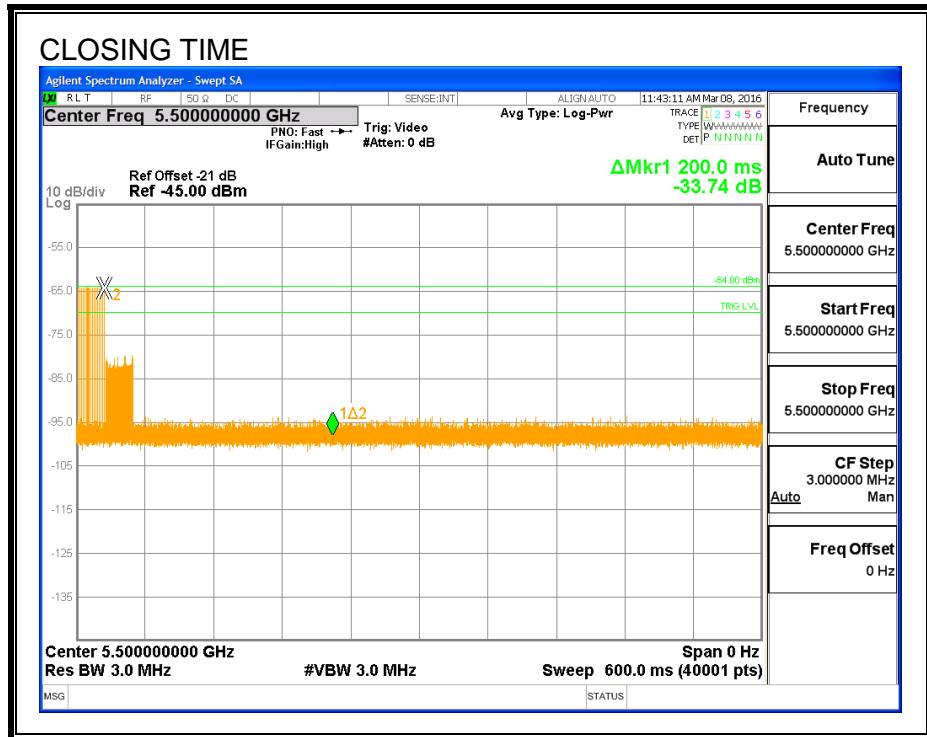
RESULTS

Channel Move Time (sec)	Limit (sec)
0.0056	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

MOVE TIME

CHANNEL CLOSING TIME



AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.



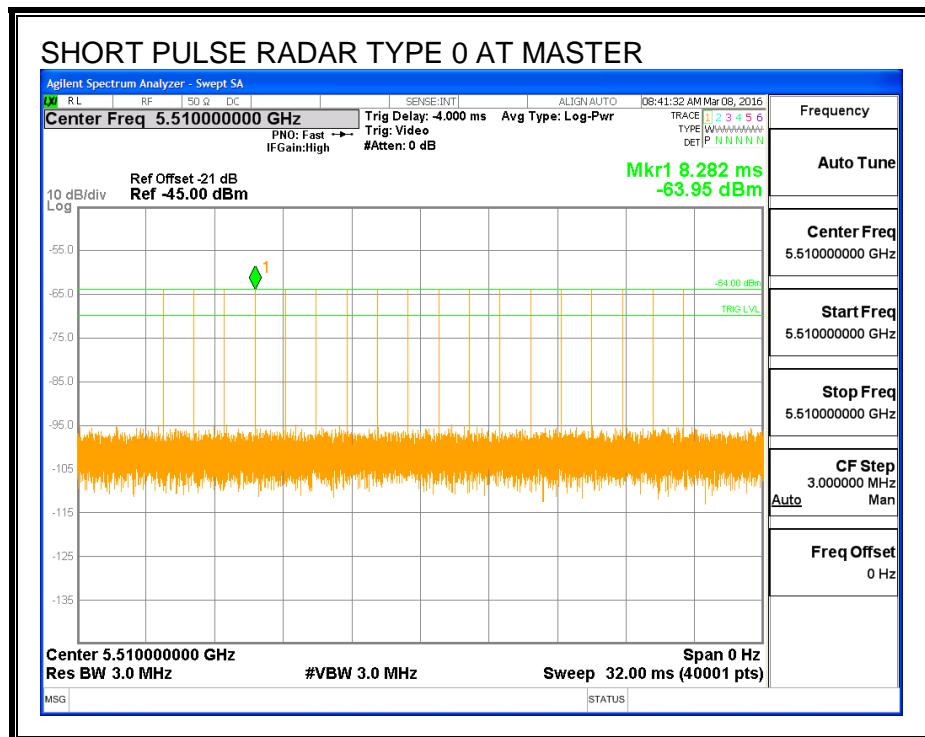
10.3. CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH

10.3.1. TEST CHANNEL

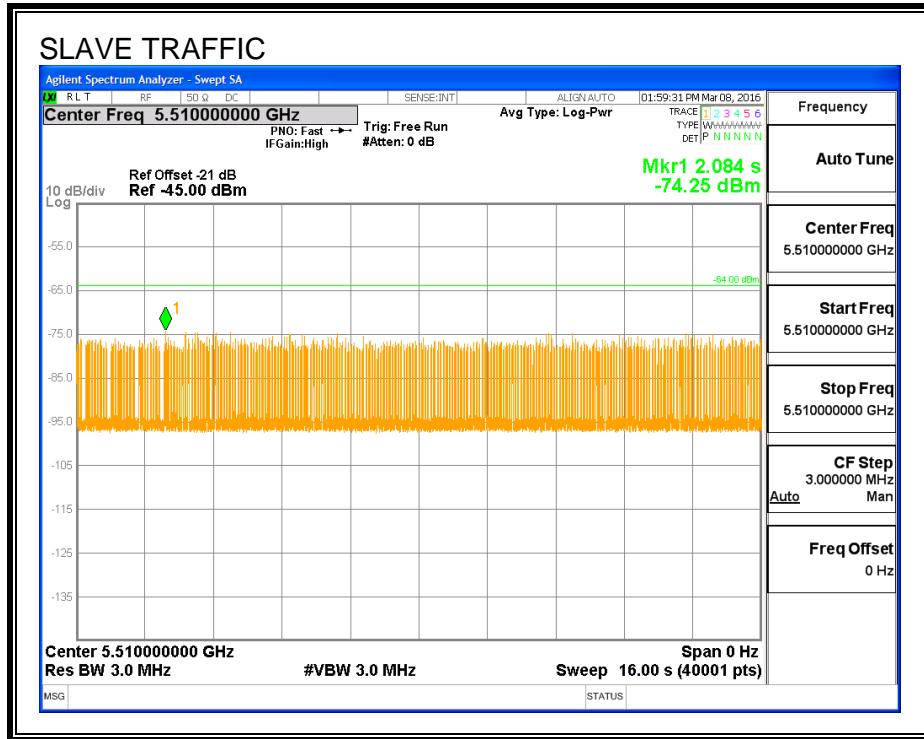
All tests were performed at a channel center frequency of 5510 MHz.

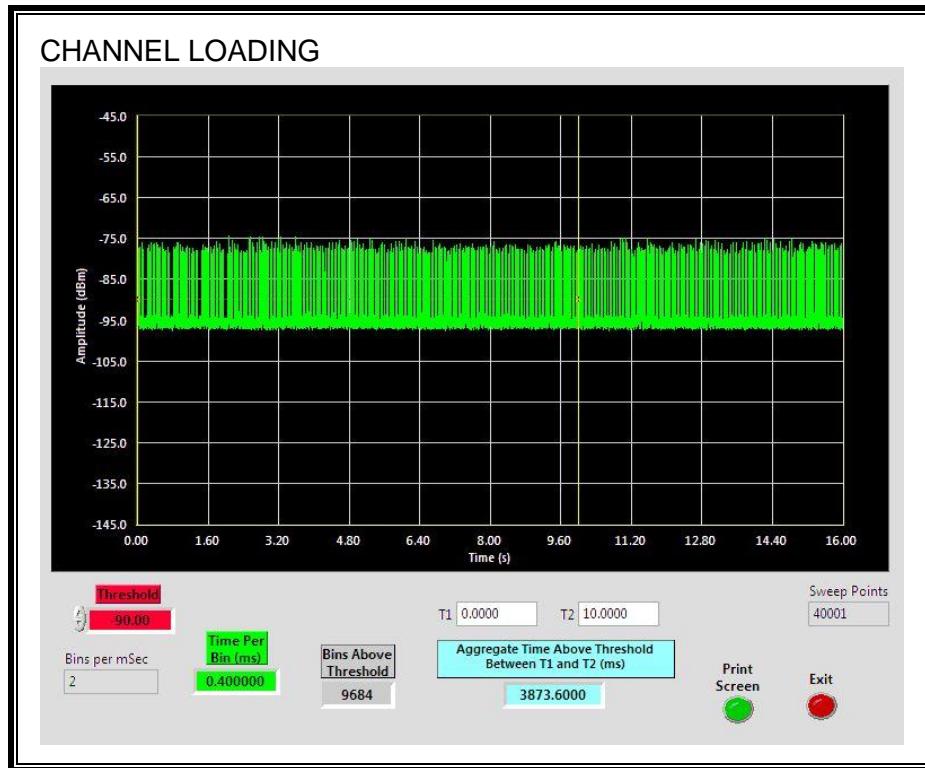
10.3.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM



TRAFFIC



CHANNEL LOADING

The level of traffic loading on the channel by the EUT is 38.73%

10.3.3. OVERLAPPING CHANNEL TESTS**RESULTS**

These tests are not applicable.

10.3.4. MOVE AND CLOSING TIME**REPORTING NOTES**

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

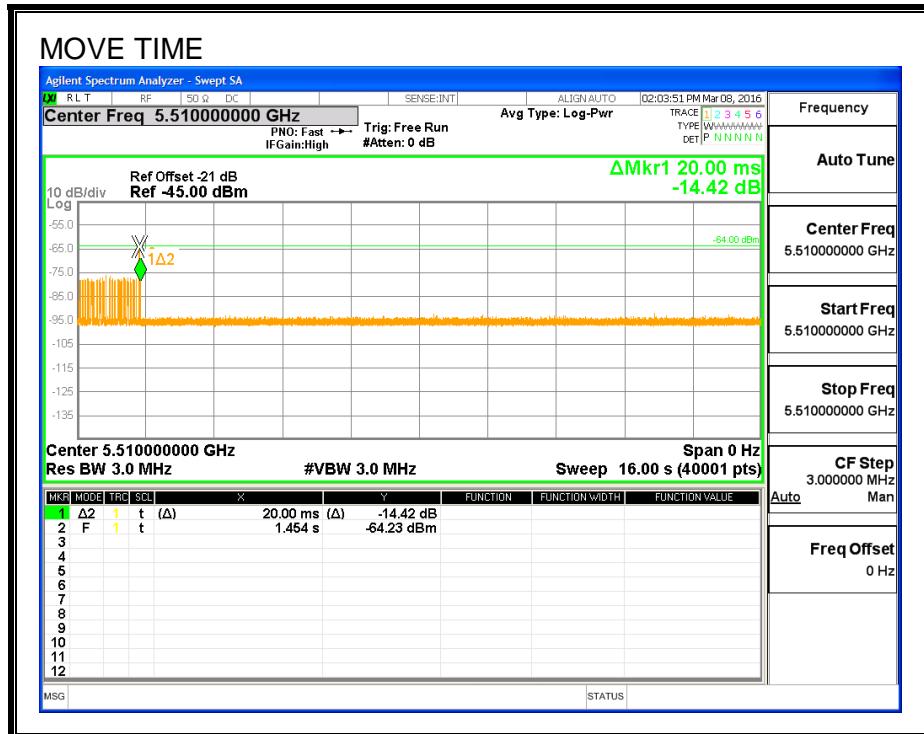
(Number of analyzer bins showing transmission) * (dwell time per bin)

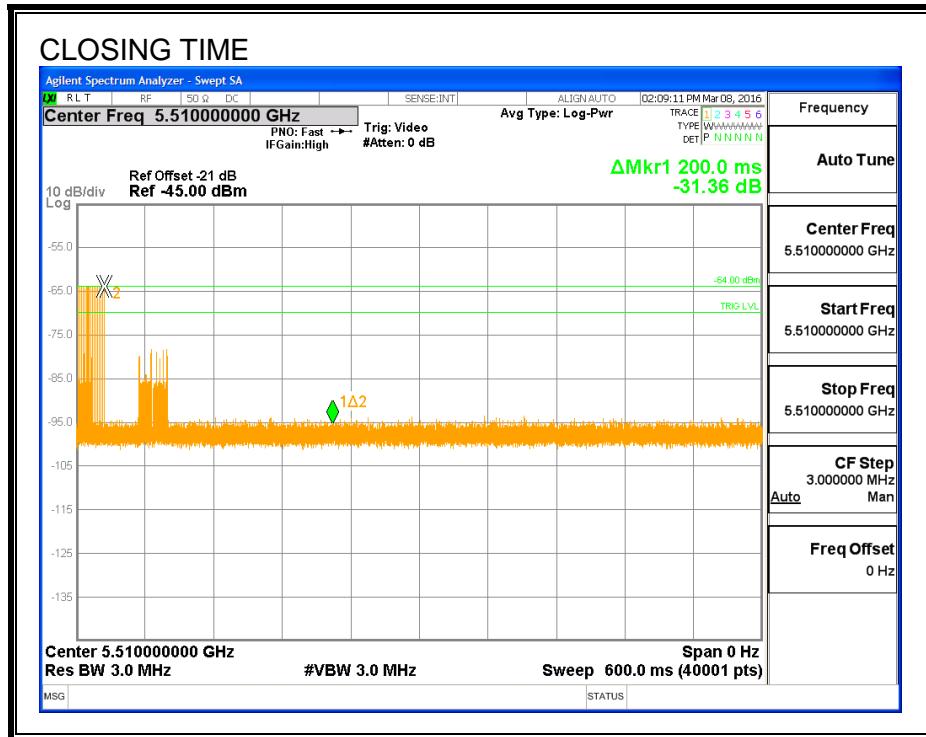
The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS

Channel Move Time (sec)	Limit (sec)
0.020	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

MOVE TIME

CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.



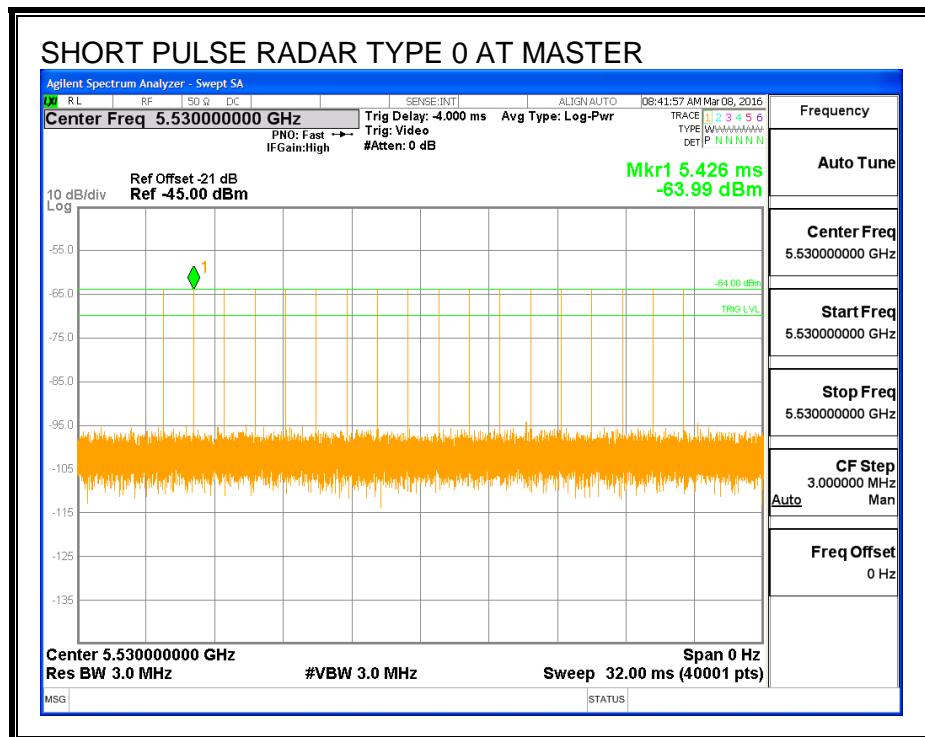
10.4. CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH

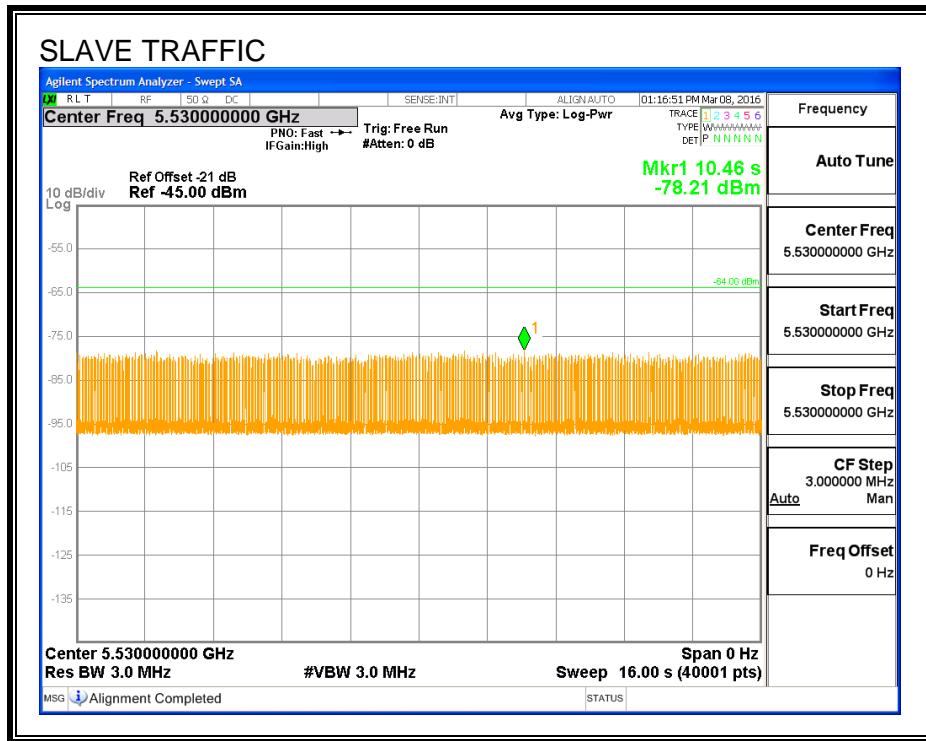
10.4.1. TEST CHANNEL

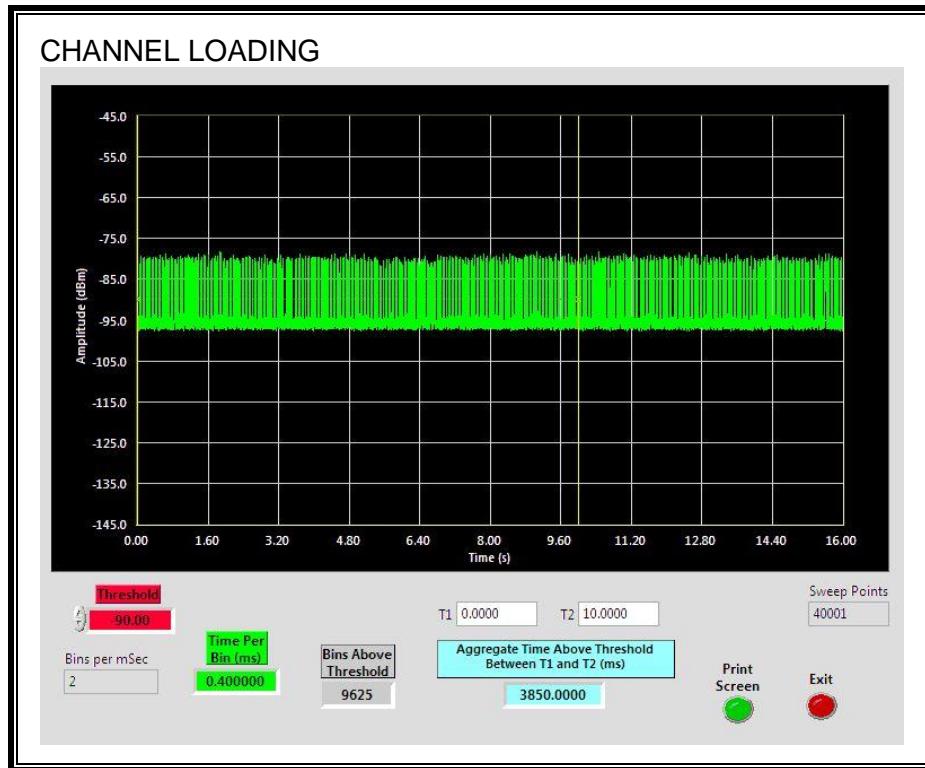
All tests were performed at a channel center frequency of 5530 MHz.

10.4.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM



TRAFFIC

CHANNEL LOADING

The level of traffic loading on the channel by the EUT is 38.5%

10.4.3. OVERLAPPING CHANNEL TESTS**RESULTS**

These tests are not applicable.

10.4.4. MOVE AND CLOSING TIME**REPORTING NOTES**

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

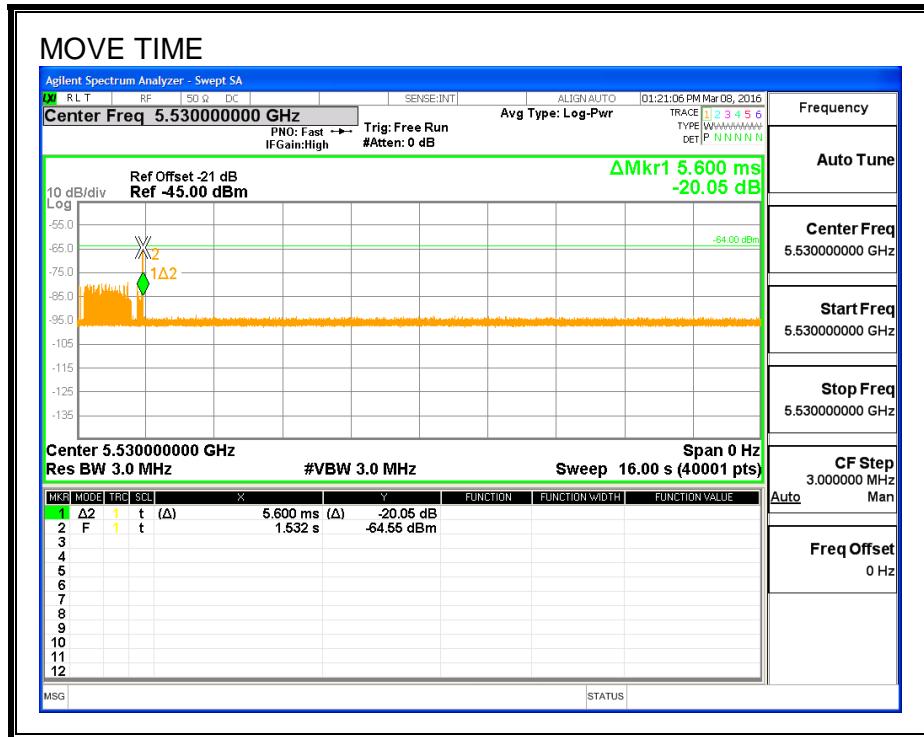
(Number of analyzer bins showing transmission) * (dwell time per bin)

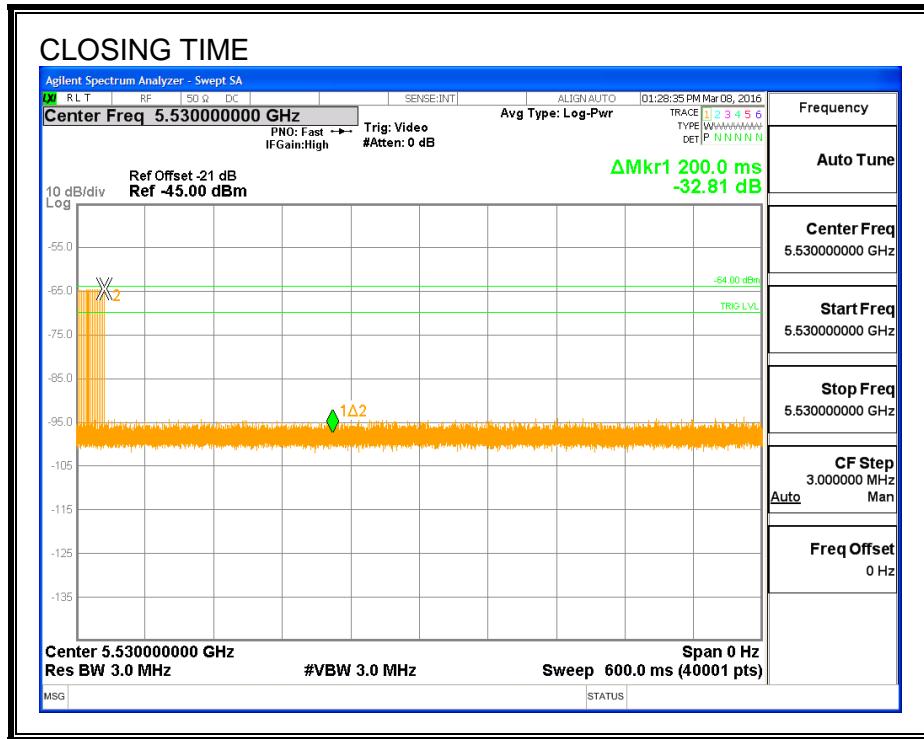
The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS

Channel Move Time (sec)	Limit (sec)
0.0056	10

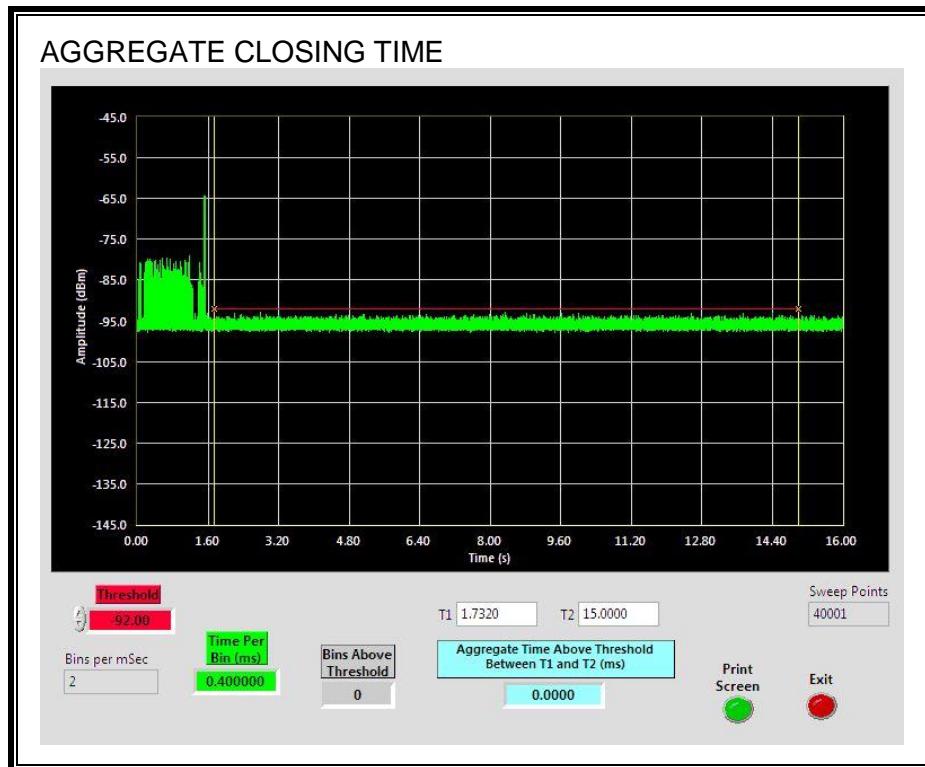
Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

MOVE TIME

CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

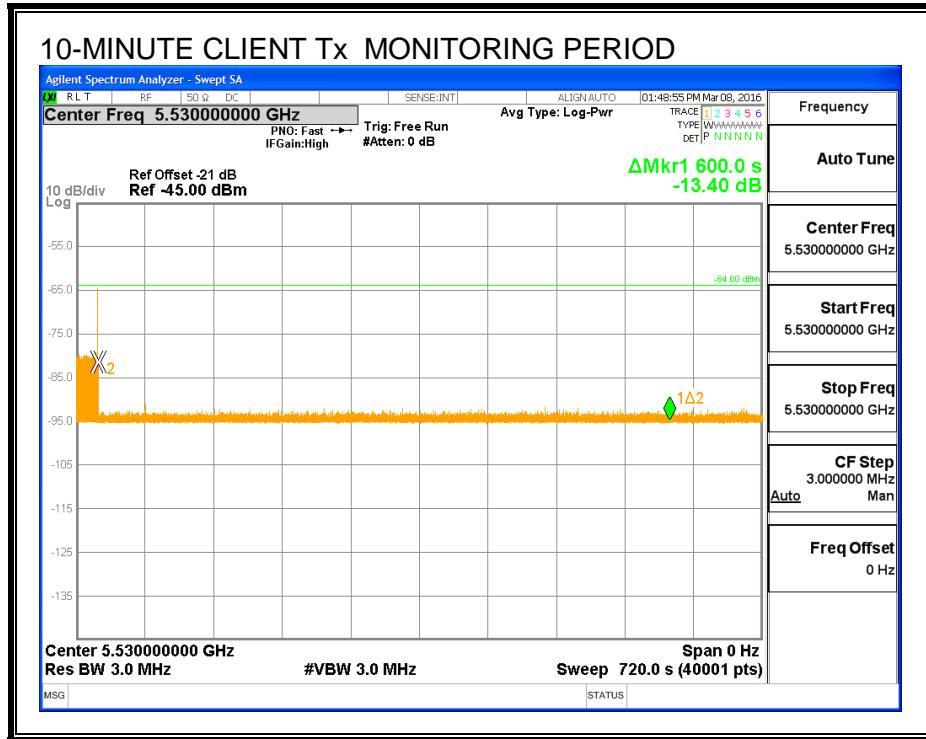
No transmissions are observed during the aggregate monitoring period.



10.4.5. 10-MINUTE CLIENT Tx MONITORING PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 10-minute observation time.



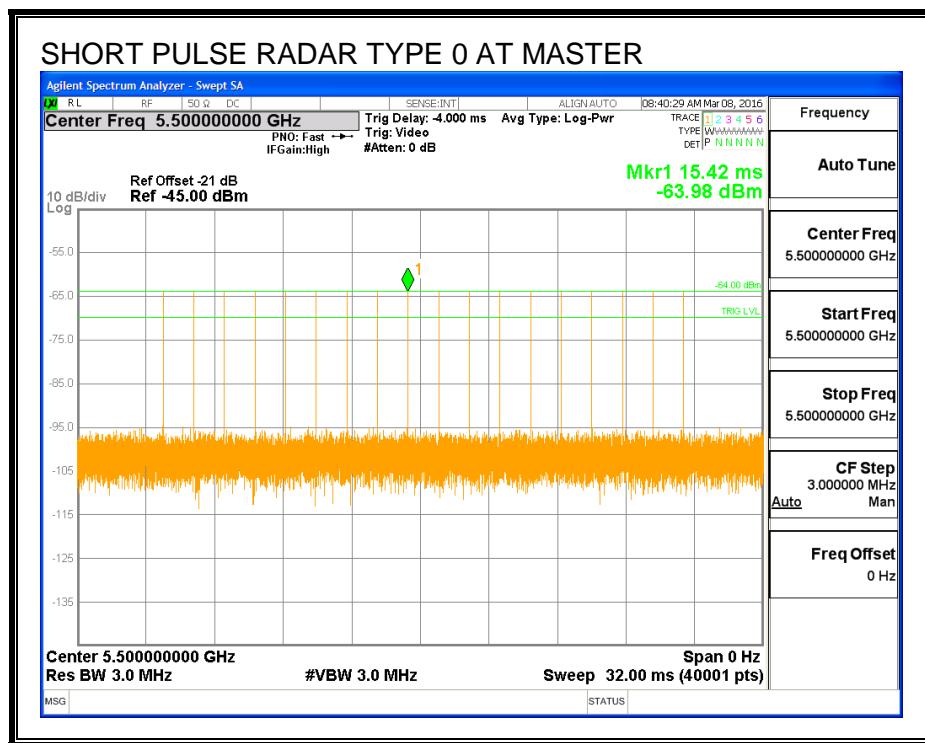
10.5. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH

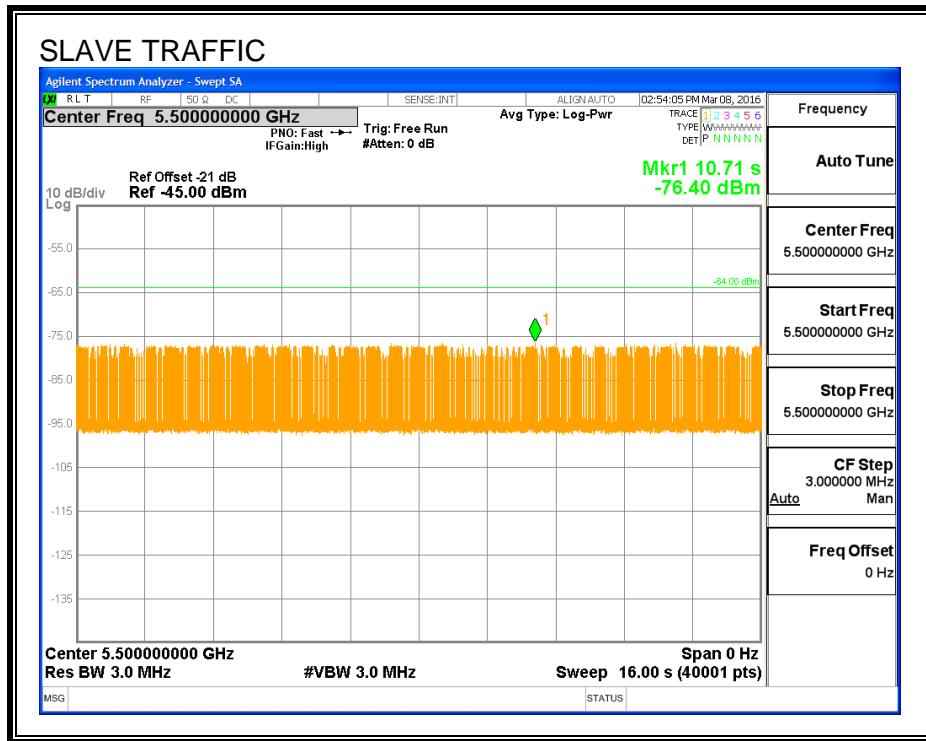
10.5.1. TEST CHANNEL

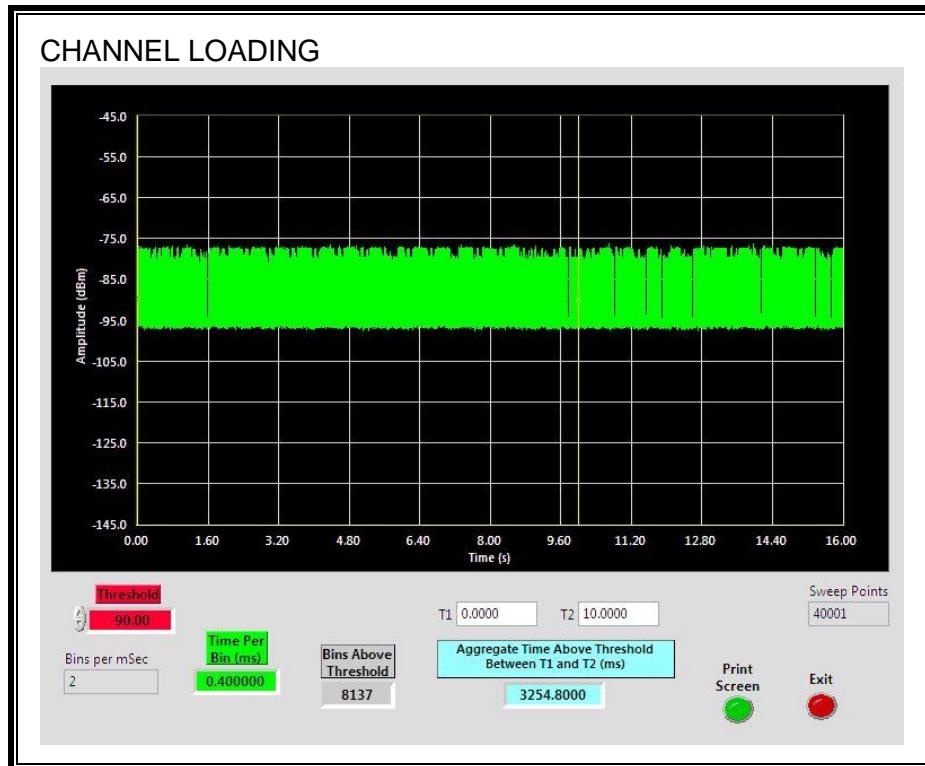
All tests were performed at a channel center frequency of 5500 MHz.

10.5.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM



TRAFFIC

CHANNEL LOADING

The level of traffic loading on the channel by the EUT is 32.54%

10.5.3. OVERLAPPING CHANNEL TESTS**RESULTS**

These tests are not applicable.

10.5.4. MOVE AND CLOSING TIME**REPORTING NOTES**

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

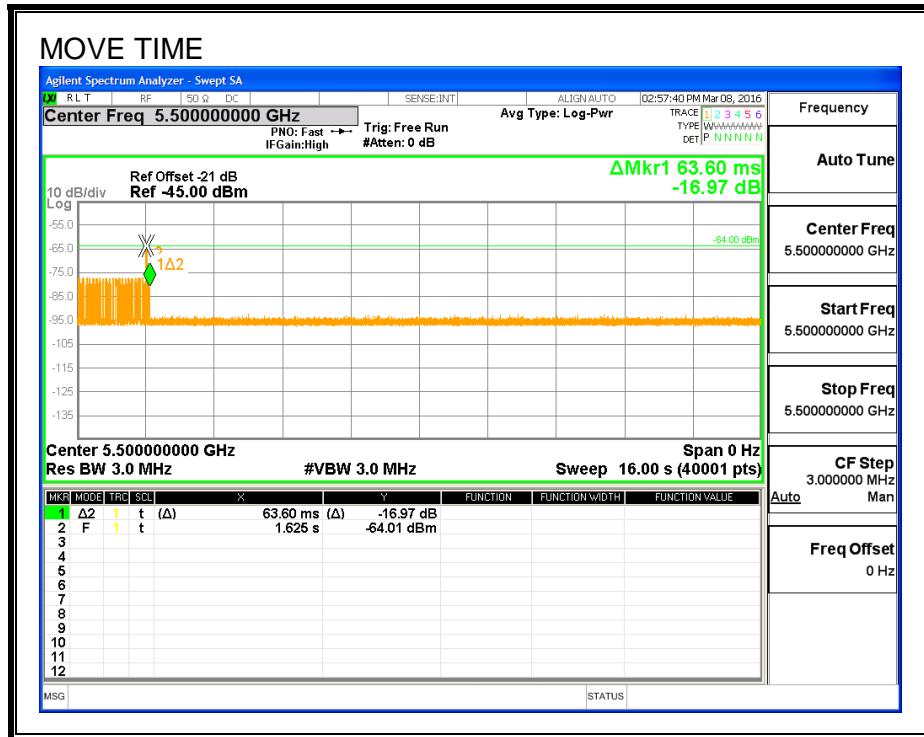
(Number of analyzer bins showing transmission) * (dwell time per bin)

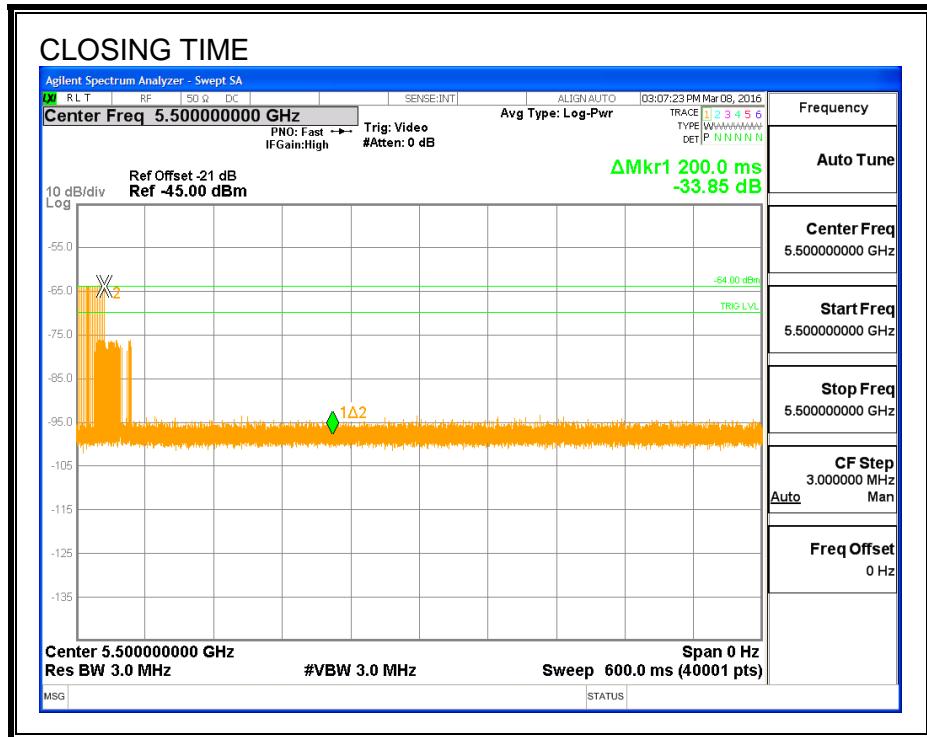
The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS

Channel Move Time (sec)	Limit (sec)
0.0636	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

MOVE TIME

CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.



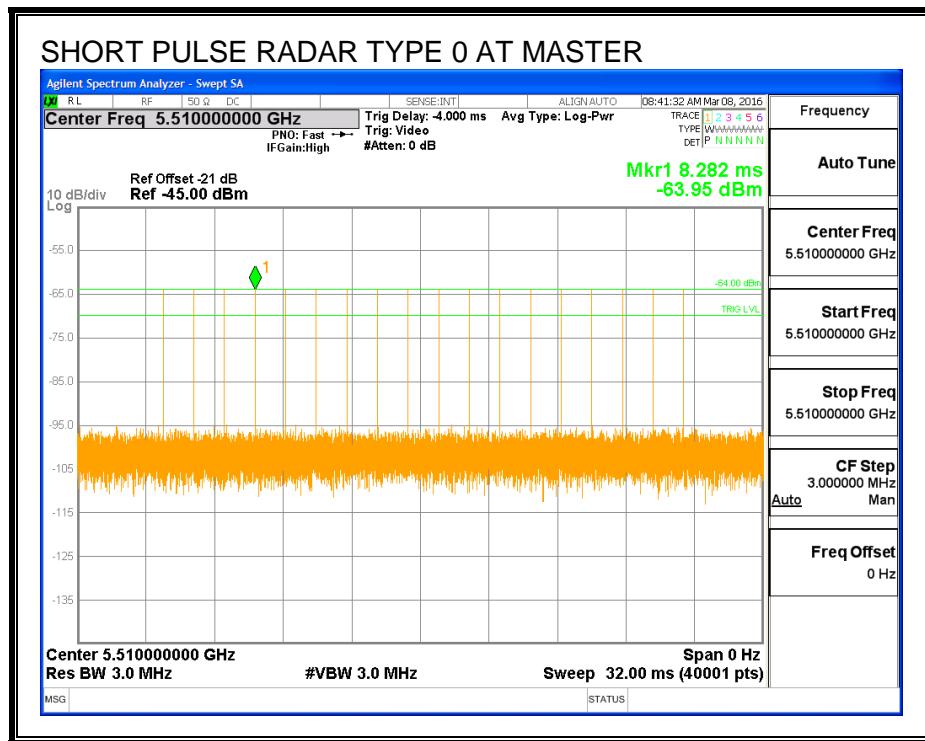
10.6. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH

10.6.1. TEST CHANNEL

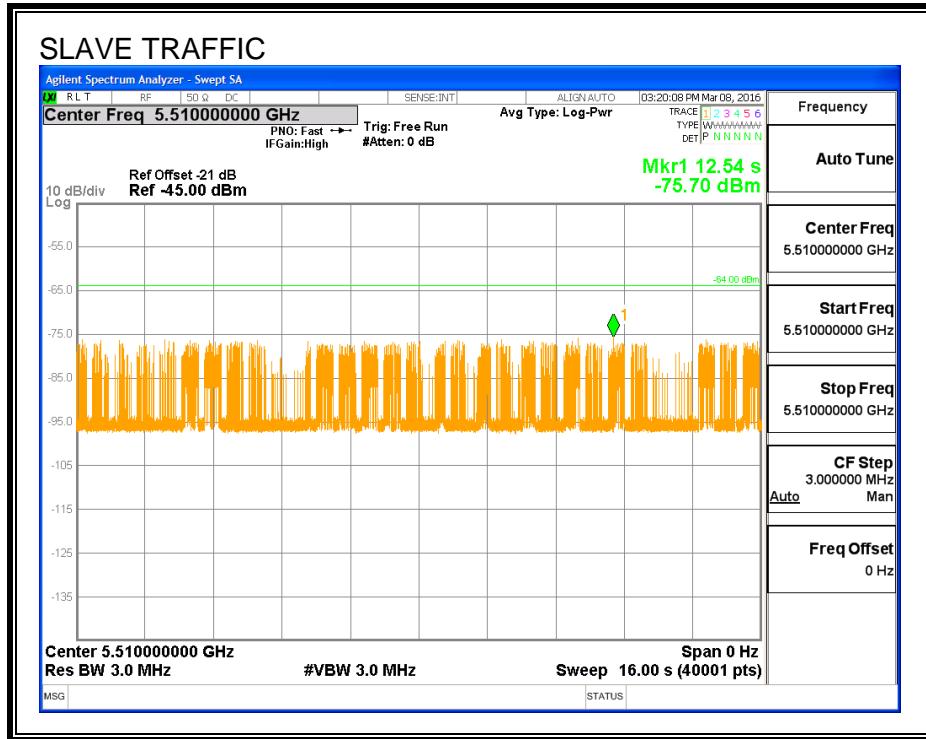
All tests were performed at a channel center frequency of 5510 MHz.

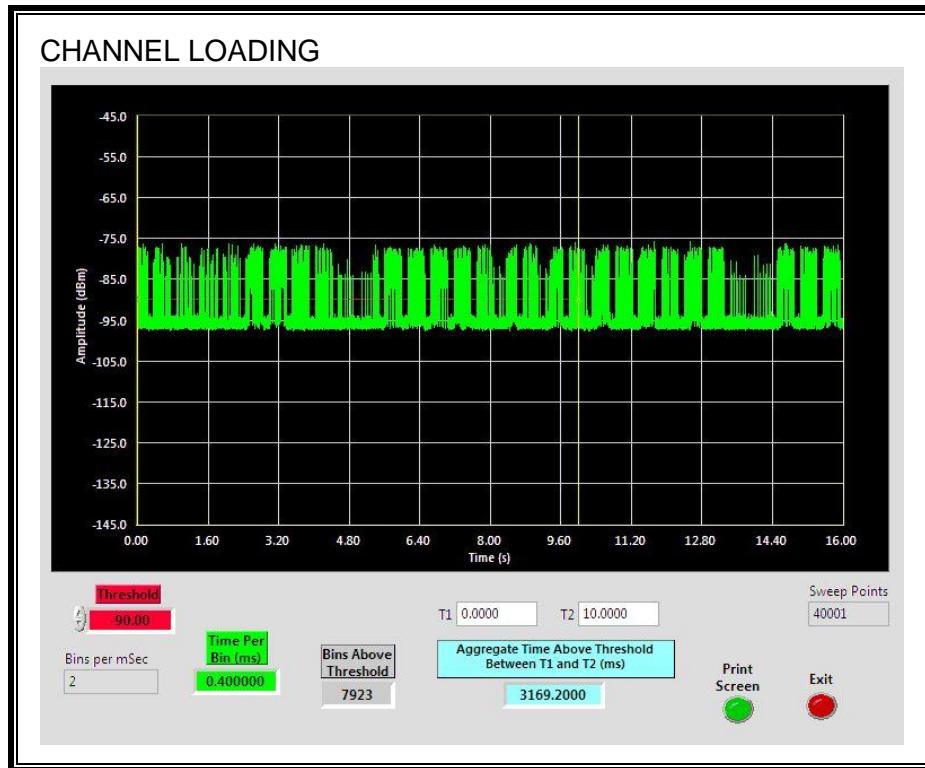
10.6.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM



TRAFFIC



CHANNEL LOADING

The level of traffic loading on the channel by the EUT is 31.69%

10.6.3. OVERLAPPING CHANNEL TESTS**RESULTS**

These tests are not applicable.

10.6.4. MOVE AND CLOSING TIME**REPORTING NOTES**

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

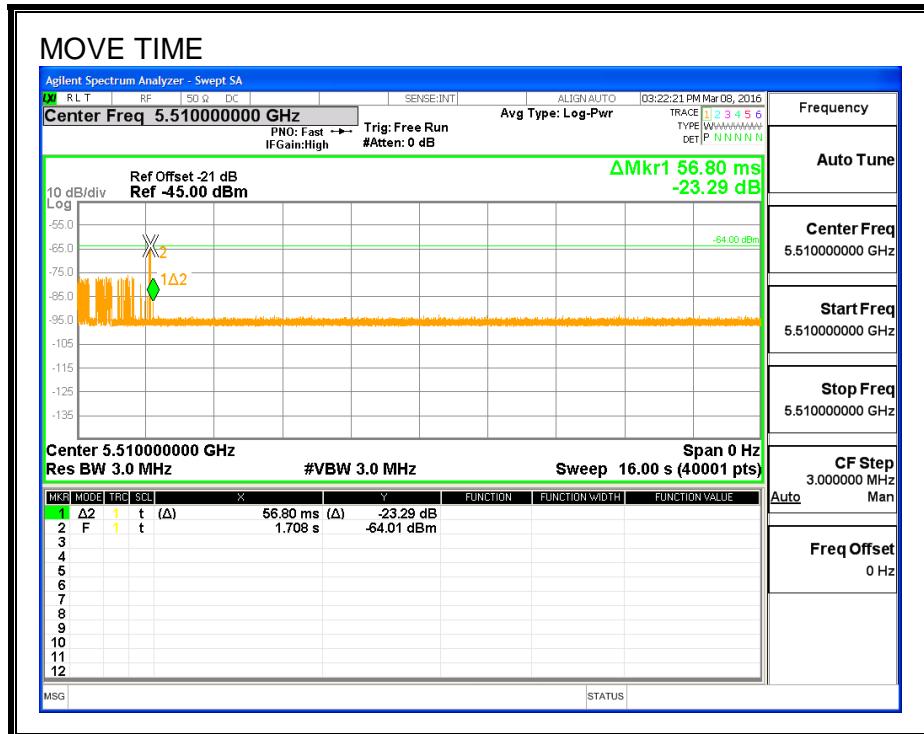
(Number of analyzer bins showing transmission) * (dwell time per bin)

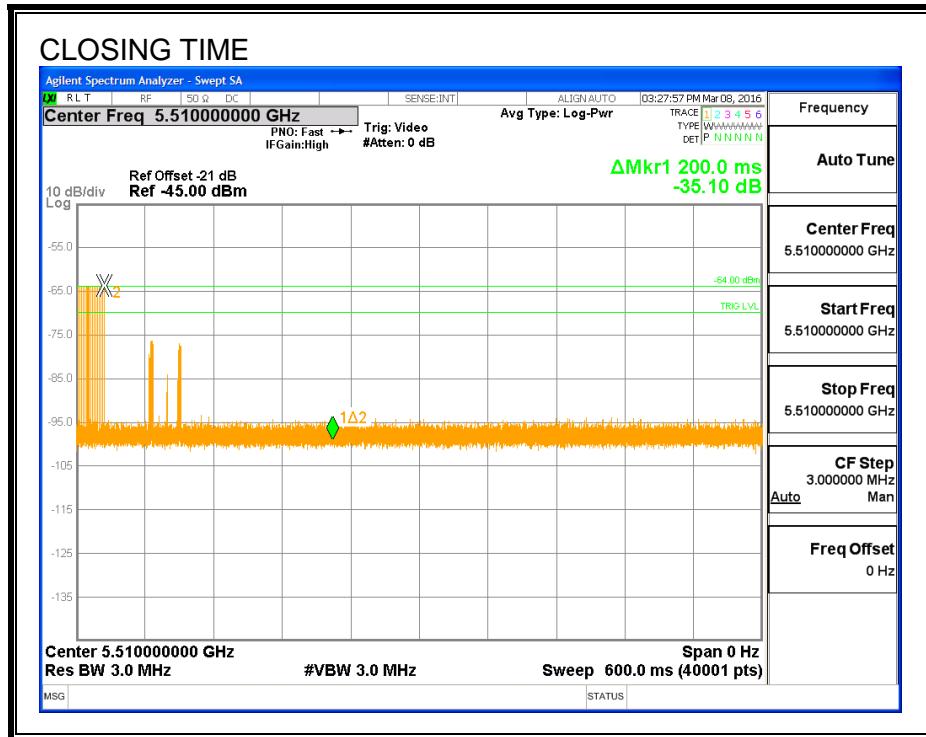
The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS

Channel Move Time (sec)	Limit (sec)
0.0568	10

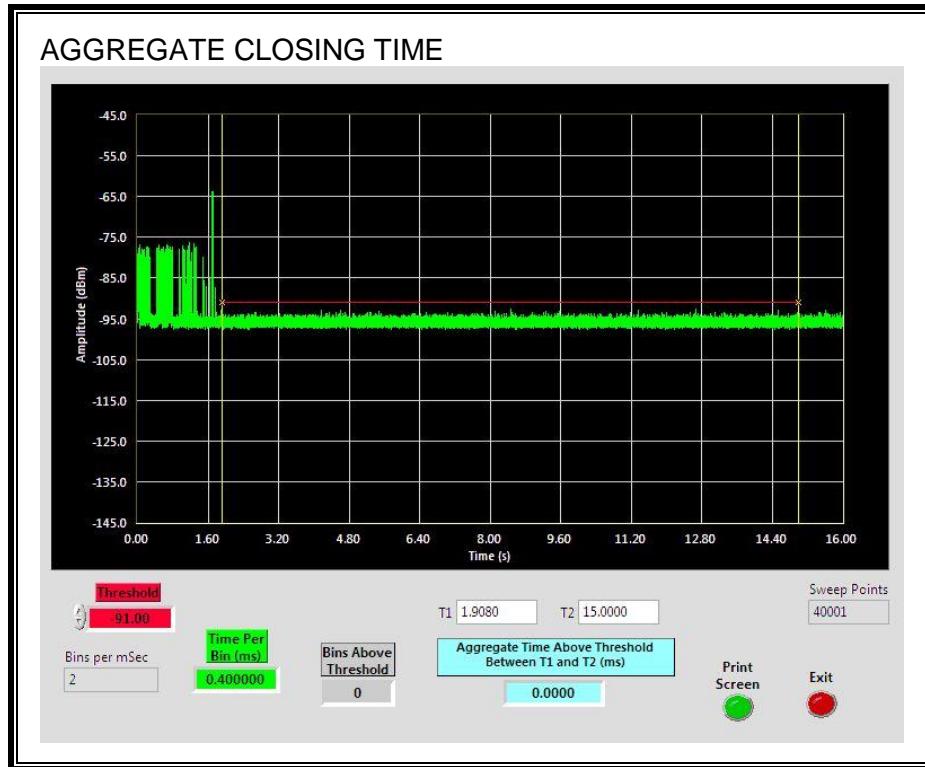
Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

MOVE TIME

CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.



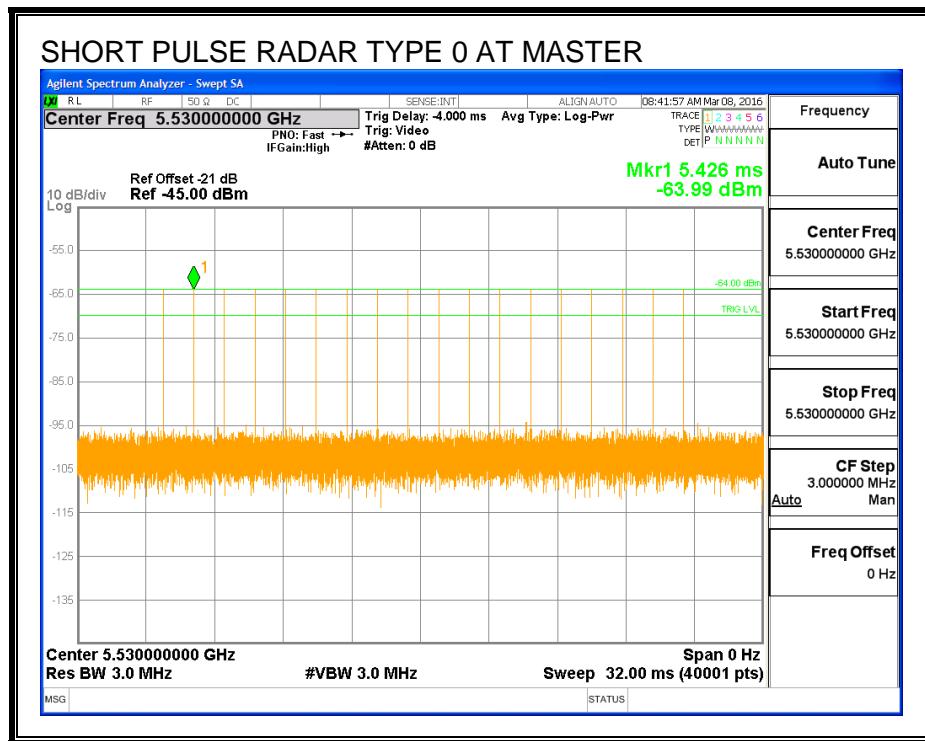
10.7. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH

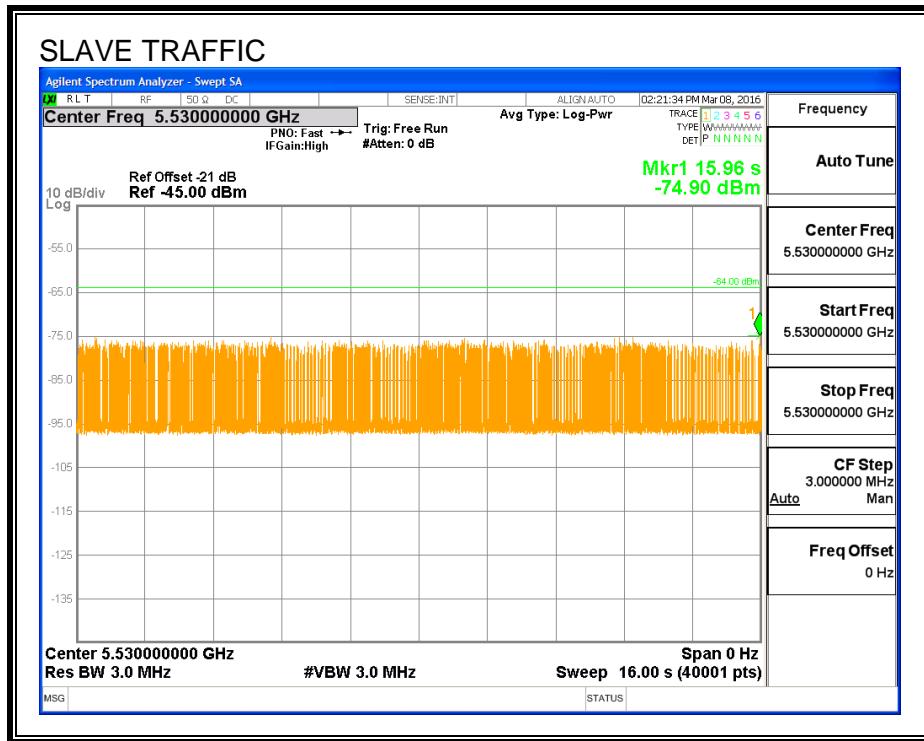
10.7.1. TEST CHANNEL

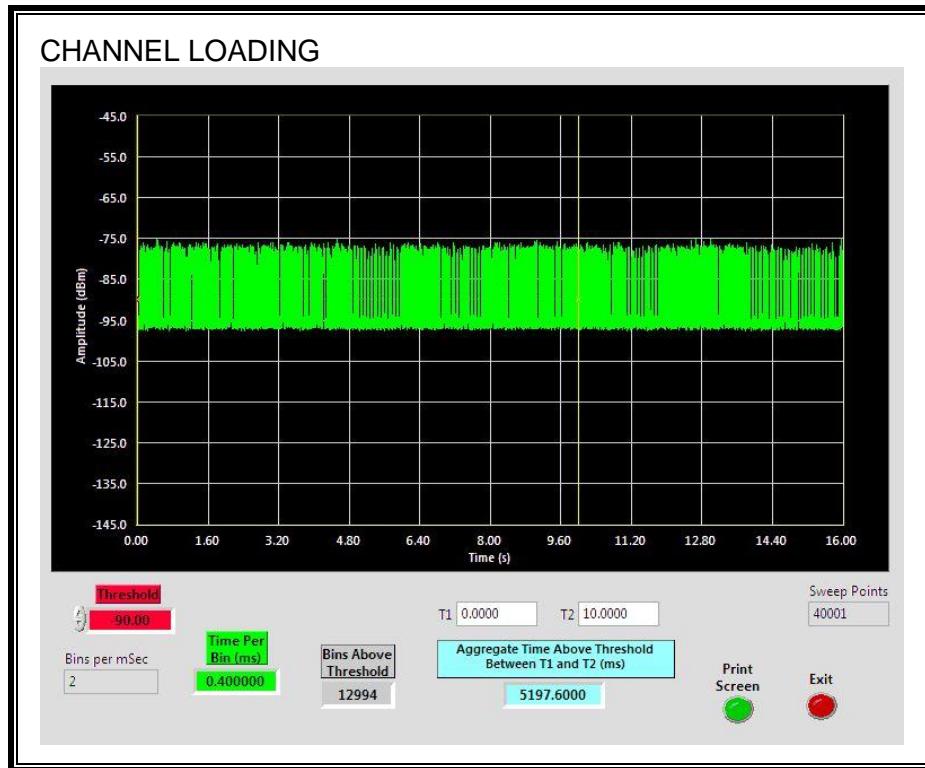
All tests were performed at a channel center frequency of 5530 MHz.

10.7.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM



TRAFFIC

CHANNEL LOADING

The level of traffic loading on the channel by the EUT is 51.97%

10.7.3. OVERLAPPING CHANNEL TESTS**RESULTS**

These tests are not applicable.

10.7.4. MOVE AND CLOSING TIME**REPORTING NOTES**

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

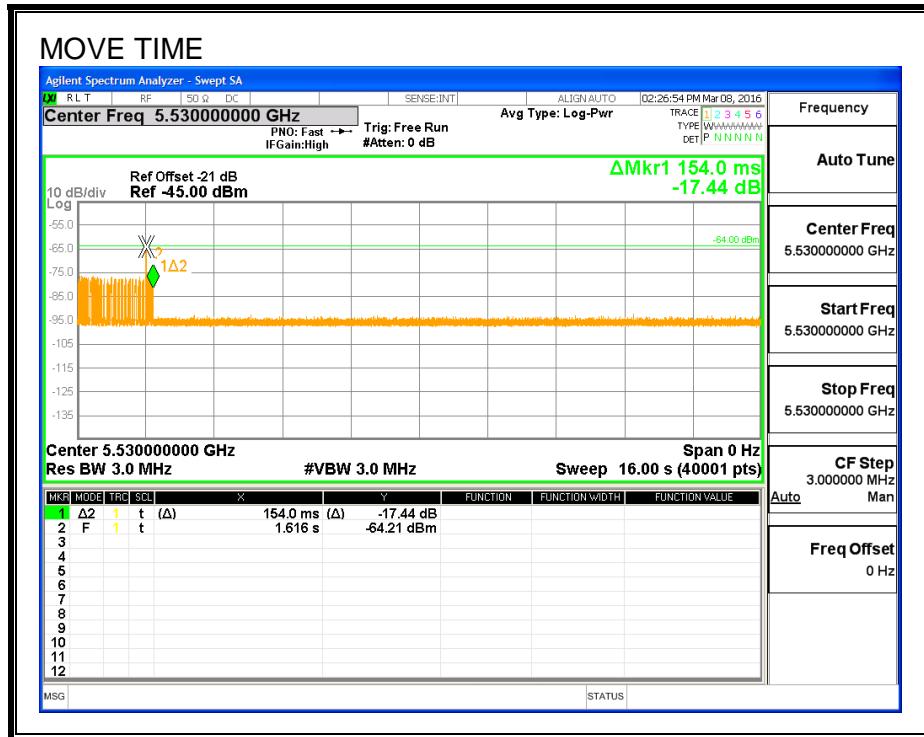
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

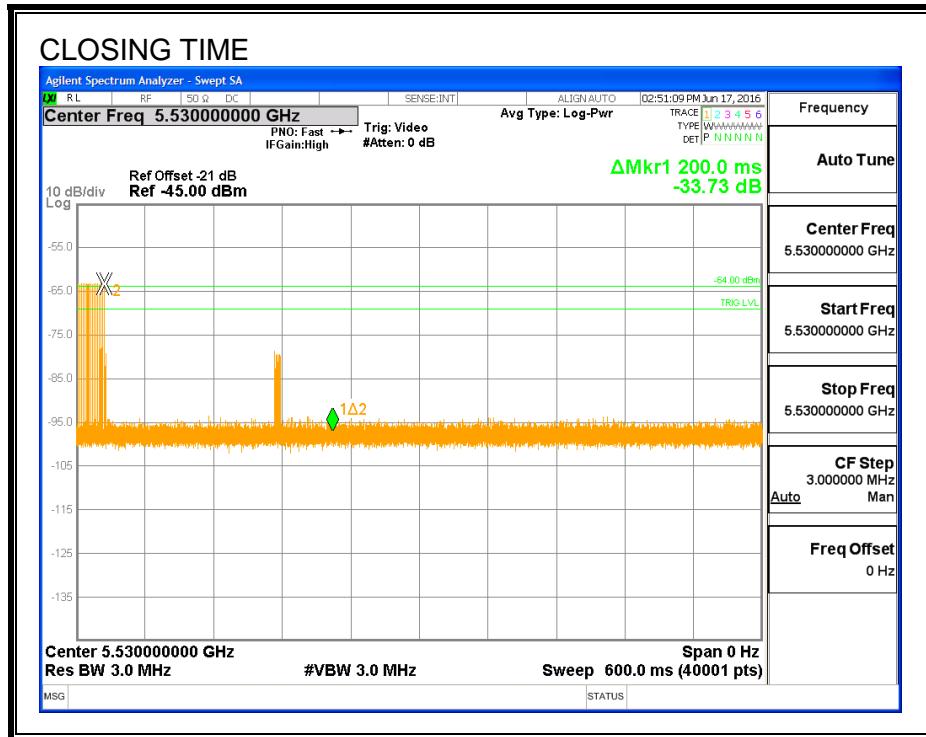
RESULTS

Channel Move Time (sec)	Limit (sec)
0.154	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

MOVE TIME

CHANNEL CLOSING TIME



AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.



10.7.5. 10-MINUTE CLIENT Tx MONITORING PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 10-minute observation time.

