



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
SMARTPHONE

**FCC ID: BCG-E3159A
Model Name: A1863, AA1907**

**Report Number: 11708541-S1V5
Issue Date: 9/5/2017**

Prepared for
**APPLE, INC.
1 INFINITE LOOP, MS 26A
CUPERTINO, CA 95014-2084**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	8/12/2017	Initial Issue	--
V2	8/16/2017	Report revised based on reviewer's feedback: 1. Sec. 6.3: Updated tables 2. Sec. 7: Updated tables 3. Sec. 9.2: Updated table for W-CDMA Band IV 4. Sec. 10.6: Corrected typos 5. Sec. 10.8: Corrected typos 6. Sec. 10.9: Corrected typos 7. Sec. 10.21: Corrected typos 8. Sec. 10.25: Corrected typos	Ray Su
V3	8/29/2017	Report revised based on reviewer's feedback: 1. Sec. 6.1: Revised note. 2. Sec. 6.3: Updated max. power table. 3. Sec. 9: Added max. power limit and note. 4. Sec. 10: Revised note.	Devin Chang
V4	9/1/2017	Report revised based on Reviewer's comments: 1. Sec. 6.3: Updated note. 2. Sec. 7: Added Antenna diagram. 3. Sec. 9: Updated note. 4. Sec. 9.5: Updated note and table. 5. Sec. 10: Added descriptive notes.	Devin Chang
V5	9/5/2017	Report revised based on Reviewer's comments: 6. Sec. 2, 6.3, & 9: Updated notes.	Devin Chang

Table of Contents

1.	Attestation of Test Results	6
2.	Test Specification, Methods and Procedures.....	7
3.	Facilities and Accreditation	8
4.	SAR Measurement System & Test Equipment	9
4.1.	SAR Measurement System.....	9
4.2.	SAR Scan Procedures.....	10
4.3.	Test Equipment.....	12
5.	Measurement Uncertainty.....	14
6.	Device Under Test (DUT) Information	15
6.1.	DUT Description	15
6.2.	Wireless Technologies.....	16
6.3.	Maximum Output Power from Tune-up Procedure	17
6.3.1.	WLAN SISO (P_{Cell_ON})	19
6.3.2.	WLAN MIMO (P_{Cell_ON})	23
6.3.3.	WLAN SISO (P_{Cell_OFF})	27
6.3.4.	WLAN MIMO (P_{Cell_OFF})	31
6.3.5.	WLAN (P_{Cell_MAX}) and Bluetooth (P_{max}).....	35
6.4.	General LTE SAR Test and Reporting Considerations.....	37
6.5.	LTE (TDD) Considerations.....	40
7.	RF Exposure Conditions (Test Configurations)	41
8.	Dielectric Property Measurements & System Check	44
8.1.	Dielectric Property Measurements	44
8.2.	System Check.....	53
9.	Conducted Output Power Measurements.....	57
9.1.	GSM	57
9.2.	W-CDMA	59
9.3.	CDMA.....	66
9.4.	LTE.....	68
9.5.	LTE Rel. 11 Carrier Aggregation	97
9.6.	WLAN SISO (P_{Cell_ON})	120
9.7.	WLAN MIMO (P_{Cell_ON})	121
9.8.	WLAN SISO (P_{Cell_OFF})	122
9.9.	WLAN MIMO (P_{Cell_OFF})	123

9.10.	Bluetooth.....	124
10.	Measured and Reported (Scaled) SAR Results.....	126
10.1.	GSM850.....	128
10.2.	GSM1900.....	129
10.3.	W-CDMA Band V.....	130
10.4.	W-CDMA Band IV.....	131
10.5.	W-CDMA Band II.....	132
10.6.	CDMA BC0.....	133
10.7.	CDMA BC1.....	134
10.8.	CDMA BC10.....	135
10.9.	LTE Band 2 (20MHz Bandwidth).....	136
10.10.	LTE Band 4 (20MHz Bandwidth).....	136
10.11.	LTE Band 5 (10MHz Bandwidth).....	136
10.12.	LTE Band 7 (20MHz Bandwidth).....	137
10.13.	LTE Band 12 (10MHz Bandwidth).....	139
10.14.	LTE Band 13 (10MHz Bandwidth).....	140
10.15.	LTE Band 17 (10MHz Bandwidth).....	140
10.16.	LTE Band 25 (20MHz Bandwidth).....	141
10.17.	LTE Band 26 (10MHz Bandwidth).....	143
10.18.	LTE Band 30 (10MHz Bandwidth).....	144
10.19.	LTE Band 41 (20MHz Bandwidth).....	145
10.20.	LTE Band 66 (20MHz Bandwidth).....	147
10.21.	LTE-uplink 2CA Band 7 (20MHz + 20MHz BW).....	149
10.22.	LTE-uplink 2CA Band 41 (20MHz + 20MHz BW).....	149
10.23.	Wi-Fi (DTS Band).....	150
10.24.	Wi-Fi (U-NII-1 and U-NII-2A Band).....	152
10.25.	Wi-Fi (U-NII-2C Band).....	154
10.26.	Wi-Fi (U-NII-3 Band).....	156
10.27.	Wi-Fi Variant 2 Spot Check.....	158
10.28.	Bluetooth.....	160
11.	SAR Measurement Variability.....	162
12.	Simultaneous Transmission SAR Analysis.....	163
12.1.	Sum of the SAR for Worst Case Cell-Off (UNII & BT only).....	164
12.2.	Sum of the SAR for Worst Case Cell-On (Cellular UAT 1), DTS and BT.....	164
12.3.	Sum of the SAR for Worst Case Cell-On (Cellular UAT 1), UNII and BT.....	165
12.4.	Sum of the SAR for Worst Case Cell-On (LAT 1), DTS and BT.....	165


12.5.	<i>Sum of the SAR for Worst Case Cell-On (LAT 1), UNII and BT</i>	<i>166</i>
Appendixes		167
11708541-S1V1 SAR_App A Setup Photos		167
11708541-S1V1 SAR_App B System Check Plots		167
11708541-S1V1 SAR_App C Highest Test Plots.....		167
11708541-S1V1 SAR_App D Tissue Ingredients.....		167
11708541-S1V1 SAR_App E Probe Cal. Certificates		167
11708541-S1V1 SAR_App F Dipole Cal. Certificates.....		167

1. Attestation of Test Results

Applicant Name	APPLE, INC.			
FCC ID	BCG-E3159A			
Model Name	A1863, A1907			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg)			
	Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure	1.6			
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	PCE	DTS	NII	DSS
Head	1.14	1.17	1.20	0.37
Body-worn	1.08	1.07	1.13	0.50
Hotspot	1.08	1.07	1.13	N/A
Simultaneous TX	Head	1.51	1.49	1.51
	Body-worn	1.56	1.56	1.54
	Hotspot	1.56	1.56	N/A
Date Tested	6/29/2017 to 7/28/2017			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By:	Prepared By:
	
Devin Chang Senior Engineer UL Verification Services Inc.	Ray Su Engineer UL Verification Services Inc.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures & manufacturer KDB inquiries:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; Page 36, RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October, 2014; Page 37, LTE Considerations (LTE Band 41 Test Channels)

Additional Guidance: Operational Description and Manufacturer KDB inquiry

- Carrier Aggregation – KDB guidance to identify test cases with uplink carrier aggregation enabled in conjunction with FCC PAG Guidance for the test cases mentioned in Sec. 10.
- Detect Mode – KDB guidance related to SAR testing for proprietary detection mode used to determine proximity to head or body and set power accordingly for Wi-Fi and Cellular Transmitters.
- Cellular State Dependent Wi-Fi Power control – KDB guidance related to power control mechanism for Wi-Fi and Bluetooth transmitters based on the operational state of the Wi-Fi and Cellular Transmitters. The Wi-Fi and Bluetooth power configuration are listed as follows:
 - For Wi-Fi
 - P_{Cell_ON} : This will be used when both Cellular and Wi-Fi radios are ON.
 - P_{Cell_OFF} : This will be used when only Wi-Fi radio is ON
 - P_{Cell_MAX} : This will be used when the device is placed on the proprietary wireless charger and is therefore considered to be a mobile device. Refer to separate MPE report.
 - For Bluetooth
 - Bluetooth P_{high} is used when Wi-Fi antenna is active and Cellular antenna is inactive.
 - Bluetooth P_{low} is used with Wi-Fi and Cellular antenna is active or Wi-Fi antenna inactive and Cellular antenna is active.
 - Bluetooth $P_{standalone}$ is used with Wi-Fi and Cellular antennas are inactive.
 - Bluetooth P_{max} is used when the device is placed on a proprietary wireless charger and is therefore considered to be a mobile device. Refer to separate MPE report.

The above power configurations for Wi-Fi and Bluetooth are triggered by all of the Cellular Bands with respect to the different Antennas and Exposure Conditions – Head, Body, and Hotspot has been verified and validated by the Manufacturer. Also, all of the UL CA conditions operate correctly with the intended maximum output power levels in simulated normal operating conditions using the Base Station Simulator and has been verified and validated by the Manufacturer.

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 4
SAR Lab D	
SAR Lab E	
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

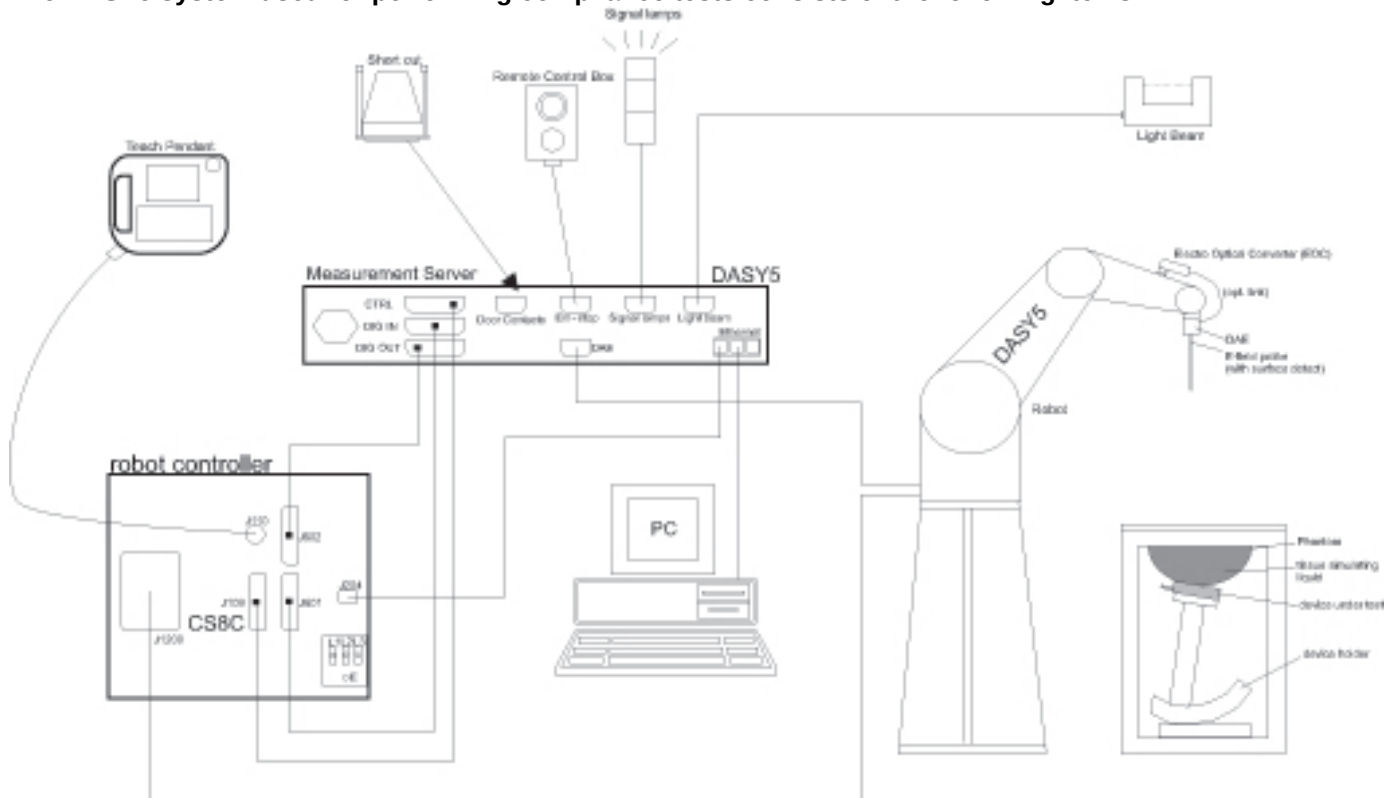

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40001647	8/23/2017
Dielectric Probe kit	SPEAG	DAK-3.5	1087	11/8/2017
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	11/8/2017
Thermometer	Traceable Calibration Control Co.	4242	140493798	8/9/2017

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	N5181A	MY50140630	5/16/2018
Power Meter	Keysight	N1912A	MY50001018	10/11/2017
Power Sensor	Agilent	N1921A	MY53260001	10/17/2017
Power Sensor	Agilent	N1921A	MY53070007	3/1/2018
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	HP	1611	215-02292	N/A
Synthesized Signal Generator	HP	8665B	3546A00784	9/2/2017
Power Meter	HP	437B	3125U11347	8/30/2017
Power Meter	HP	437B	3125U09516	9/27/2017
Power Sensor	HP	8481A	1926A16917	10/7/2017
Power Sensor	HP	8481A	2702A76223	9/14/2017
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808938	N/A
Directional coupler	Werlatone	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab A)	SPEAG	EX3DV4	3929	3/15/2018
E-Field Probe (SAR Lab B)	SPEAG	EX3DV4	7335	3/15/2018
E-Field Probe (SAR Lab C)	SPEAG	EX3DV4	3885	9/20/2017
E-Field Probe (SAR Lab D)	SPEAG	EX3DV4	7356	4/21/2018
E-Field Probe (SAR Lab E)	SPEAG	EX3DV4	3772	2/16/2018
E-Field Probe (SAR Lab F)	SPEAG	EX3DV4	3773	4/21/2018
E-Field Probe (SAR Lab G)	SPEAG	EX3DV4	3749	1/23/2018
E-Field Probe (SAR Lab H)	SPEAG	EX3DV4	3989	2/16/2018
Data Acquisition Electronics (SAR Lab A)	SPEAG	DAE4	1434	4/19/2018
Data Acquisition Electronics (SAR Lab B)	SPEAG	DAE4	1257	9/15/2017
Data Acquisition Electronics (SAR Lab C)	SPEAG	DAE4	1377	9/14/2017
Data Acquisition Electronics (SAR Lab D)	SPEAG	DAE4	1359	2/10/2018
Data Acquisition Electronics (SAR Lab E)	SPEAG	DAE4	1357	2/13/2018
Data Acquisition Electronics (SAR Lab F)	SPEAG	DAE4	1239	4/19/2018
Data Acquisition Electronics (SAR Lab G)	SPEAG	DAE4	1352	11/11/2017
Data Acquisition Electronics (SAR Lab H)	SPEAG	DAE4	1472	3/10/2018
System Validation Dipole	SPEAG	D750V3	1019	3/13/2018
System Validation Dipole	SPEAG	D750V3	1071	11/8/2017
System Validation Dipole	SPEAG	D835V2	4d002	11/8/2017
System Validation Dipole	SPEAG	D835V2	4d142	9/22/2017
System Validation Dipole	SPEAG	D1750V2	1050	4/18/2018
System Validation Dipole	SPEAG	D1750V2	1077	9/14/2017
System Validation Dipole	SPEAG	D1900V2	5d140	4/19/2018
System Validation Dipole	SPEAG	D2300V2	1002	3/10/2018
System Validation Dipole	SPEAG	D2450V2	748	2/8/2018
System Validation Dipole	SPEAG	D2450V2	899	3/10/2018
System Validation Dipole	SPEAG	D2600V2	1006	9/13/2017
System Validation Dipole	SPEAG	D2600V2	1036	3/10/2018
System Validation Dipole	SPEAG	D5GHzV2	1003	2/13/2018
System Validation Dipole	SPEAG	D5GHzV2	1138	9/22/2017
System Validation Dipole	SPEAG	D5GHzV2	1168	11/14/2017

Other

Name of Equipment	Manufacturer	Type/Model	T Number	Serial No.	Cal. Due Date
Power Meter	Agilent	N1911A	T1244	MY55196008	6/15/2018
Power Sensor	Agilent	N1921A	T309	MY52270022	12/17/2017
Power Sensor	Agilent	N1921A	T734	MY52200012	10/17/2017
Base Station Simulator	R & S	CMU200	T261	106301	11/28/2017
Base Station Simulator	R & S	CMW500	T957	134852	6/6/2018
Base Station Simulator	R & S	CMW500	T948	135393	5/15/2018
Base Station Simulator	R & S	CMW500	T232	104245	2/3/2018
Base Station Simulator	R & S	CMW500	T1526	147543	5/2/2018
Base Station Simulator	R & S	CMW500	N/A	145793	6/5/2018
Base Station Simulator	R & S	CMW500	N/A	112269	6/5/2018
Base Station Simulator	R & S	CMW500	N/A	157972	4/1/2018

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Model A1863, A1907 is a mobile phone with multimedia functions (music, application support, and video), Cellular GSM/GPRS/EGPRS/CDMA2000 1x Advanced/EVDO Rev.A /WCDMA/HSPA+/DC-HSDPA/HSUPA, LTE FDD/TDD & Carrier Aggregation / TDSCDMA, VoLTE radio, IEEE 802.11a/b/g/n/ac radio 2x2 MIMO, Bluetooth radio, GPS and NFC. The rechargeable battery is not user accessible.

Model A1863, A1907 are identical. Two model numbers are allocated for marketing and logistic purpose only.

This device has two cellular antennas (UAT 1 and LAT 1) as well as multiple Wi-Fi/Bluetooth antennas (UAT 1 for Wi-Fi-BT 2.4GHz, UAT 2 for Wi-Fi 5GHz, and LAT 3 for Wi-Fi-BT 2.4/5GHz).

The device is capable of switching between the LAT and UAT based on signal strength.

The antenna switching is implemented with a physical, “break-before-make” switch such that only one antenna can be used for cellular transmission at a time.

In Airplay mode, the device uses the same 802.11 modes, modulation, MIMO, Channel Bandwidth, power and power control mechanism, etc. as Wi-Fi does. Therefore, Airplay usage is categorized by the Wi-Fi SAR testing contained in Section 10.

There are two vendors of the Wi-Fi/Bluetooth radio modules: Variant 1 and Variant 2 and they have the same mechanical outline, same on board antenna, matching circuit, antenna structure and same specification. Complete SAR evaluation is performed on Variant 1. The worst case configurations for each operation mode and frequency band are repeated for Variant 2. It is confirmed that Variant 1 represents the worst case.

Device Dimension	Overall (Length x Width): 138.4 mm x 67.3 mm Overall Diagonal: 147 mm Display Diagonal: 119.38 mm
Back Cover	☒ The rechargeable battery is not user accessible.
Battery Options	☒ The rechargeable battery is not user accessible.
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☐ Mobile Hotspot (Wi-Fi 5 GHz)
AirPlay	AirPlay mode enabled devices transfer data directly between each other ☒ AirPlay (Wi-Fi 2.4 GHz) ☒ AirPlay (Wi-Fi 5 GHz)

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: ☐ Class 8 - 1 Up, 4 Down ☒ Class 10 - 2 Up, 4 Down ☐ Class 12 - 4 Up, 4 Down ☐ Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25%
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No			
CDMA (CDMA2000)	BC0 BC1 BC10	1xRTT (Voice & Data) 1xEV-DO Rel. 0 1xEV-DO Rev. A 1xAdvanced		100%
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) HSPA+ (Rel. 7) DC-HSDPA (Rel. 8)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 13 FDD Band 17 FDD Band 25 FDD Band 26 FDD Band 30 TDD Band 41 FDD Band 66	QPSK 16QAM 64QAM ☒ Rel. 11 Carrier Aggregation (2 Uplinks and 4 Downlinks), UE Category 10		100% (FDD) 63.3% (TDD) This device supports uplink-downlink configuration 0-6. The configuration with the highest duty cycle was used (config. 0 at 63.3%).
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		100%
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No			
	Does this device support Band gap channel(s)? ☒ Yes ☐ No			
Bluetooth	2.4 GHz	Version 5.0 LE		77.5% (DH5) ¹

Notes:

- The Bluetooth protocol is considered source-based averaging. Bluetooth EDR, GFSK (DH5) was verified to have the highest duty cycle of 77.5% and was considered and used for SAR Testing.

6.3. Maximum Output Power from Tune-up Procedure

The device utilizes three power modes; Mode A, Mode B and Mode C. Power selection is determined by the device's positioning and use case as described in Sec. 10. Mode A power is used when the device is used against the user's head, or away from the body. Mode B is used when the device is used in a body-worn configuration by the user. Mode C is used when the device is placed on a proprietary Apple wireless charger, as described in Sec. 6.3.5. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

This device has two cellular antennas (UAT 1 and LAT 1) as well as multiple Wi-Fi/Bluetooth antennas (UAT 1 for Wi-Fi-BT 2.4GHz, UAT 2 for Wi-Fi 5GHz, and LAT 3 for Wi-Fi-BT 2.4/5GHz). The selection between antennas UAT and LAT in application is based on RSSI based antenna selection. The full details of power selections are described in the operational description.

The maximum calibration level already includes component tolerance of ± 0.75 dB for modulations other than 8PSK, where a ± 1 dB tolerance is included. KDB 447498 sec.4.1.(d) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

RF Air interface	Mode	Target Avg. RF Output Power (dBm)															
		MODE A							MODE B								
		UAT 1			LAT 1				UAT 1			LAT 1					
		MAX	Tolerance	Frame	MAX	Tolerance	Frame	MAX	Tolerance	Frame	MAX	Tolerance	Frame				
GSM850	Voice/GPRS (1 slot)	30.8	±	0.75	21.8	33.3	±	0.75	24.3	30.8	±	0.75	21.8	33.3	±	0.75	24.3
	GPRS 2 slots	29.8	±	0.75	23.8	32.3	±	0.75	26.3	29.8	±	0.75	23.8	32.3	±	0.75	26.3
	EGPRS 1 slot	25.5	±	1.0	16.5	28.0	±	1.0	19.0	25.5	±	1.0	16.5	28.0	±	1.0	19.0
	EGPRS 2 slots	24.5	±	1.0	18.5	27.0	±	1.0	21.0	24.5	±	1.0	18.5	27.0	±	1.0	21.0
GSM1900	Voice/GPRS (1 slot)	26.0	±	0.75	17.0	31.3	±	0.75	22.3	26.8	±	0.75	17.8	28.0	±	0.75	19.0
	GPRS 2 slots	23.0	±	0.75	17.0	30.3	±	0.75	24.3	23.8	±	0.75	17.8	25.0	±	0.75	19.0
	EGPRS 1 slot	24.5	±	1.0	15.5	27.0	±	1.0	18.0	24.5	±	1.0	15.5	27.0	±	1.0	18.0
	EGPRS 2 slots	23.0	±	1.0	17.0	26.0	±	1.0	20.0	23.5	±	1.0	17.5	25.0	±	1.0	19.0

RF Air interface	Mode	Target Avg. RF Output Power (dBm)											
		MODE A					MODE B						
		UAT 1			LAT 1		UAT 1			LAT 1			
		MAX		Tolerance	MAX		Tolerance	MAX		Tolerance	MAX		Tolerance
W-CDMA Band V	R99	23.8	±	0.75	24.8	±	0.75	23.8	±	0.75	24.8	±	0.75
	HSDPA	23.8	±	0.75	24.8	±	0.75	23.8	±	0.75	24.8	±	0.75
	HSUPA	23.8	±	0.75	24.8	±	0.75	23.8	±	0.75	24.8	±	0.75
	DC-HSDPA	23.8	±	0.75	24.8	±	0.75	23.8	±	0.75	24.8	±	0.75
	HSPA+	23.8	±	0.75	24.8	±	0.75	23.8	±	0.75	24.8	±	0.75
W-CDMA Band IV	R99	18.0	±	0.75	25.3	±	0.75	18.8	±	0.75	20.3	±	0.75
	HSDPA	18.0	±	0.75	25.3	±	0.75	18.8	±	0.75	20.3	±	0.75
	HSUPA	18.0	±	0.75	25.3	±	0.75	18.8	±	0.75	20.3	±	0.75
	DC-HSDPA	18.0	±	0.75	25.3	±	0.75	18.8	±	0.75	20.3	±	0.75
	HSPA+	18.0	±	0.75	25.3	±	0.75	18.8	±	0.75	20.3	±	0.75
W-CDMA Band II	R99	17.5	±	0.75	25.0	±	0.75	19.3	±	0.75	19.8	±	0.75
	HSDPA	17.5	±	0.75	25.0	±	0.75	19.3	±	0.75	19.8	±	0.75
	HSUPA	17.5	±	0.75	25.0	±	0.75	19.3	±	0.75	19.8	±	0.75
	DC-HSDPA	17.5	±	0.75	25.0	±	0.75	19.3	±	0.75	19.8	±	0.75
	HSPA+	17.5	±	0.75	25.0	±	0.75	19.3	±	0.75	19.8	±	0.75
CDMA BC0	1xRTT	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
	1xAdvanced	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
	1xEVDO Rel. 0	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
	1xEVDO Rev. A	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
CDMA BC1	1xRTT	17.5	±	0.75	25.0	±	0.75	19.3	±	0.75	19.8	±	0.75
	1xAdvanced	17.5	±	0.75	25.0	±	0.75	19.3	±	0.75	19.8	±	0.75
	1xEVDO Rel. 0	17.5	±	0.75	25.0	±	0.75	19.3	±	0.75	19.8	±	0.75
	1xEVDO Rev. A	17.5	±	0.75	25.0	±	0.75	19.3	±	0.75	19.8	±	0.75
CDMA BC10	1xRTT	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
	1xAdvanced	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
	1xEVDO Rel. 0	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
	1xEVDO Rev. A	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
LTE Band 2	QPSK	17.5	±	0.75	24.8	±	0.75	19.3	±	0.75	19.8	±	0.75
LTE Band 4	QPSK	18.0	±	0.75	24.8	±	0.75	18.8	±	0.75	20.3	±	0.75
LTE Band 5	QPSK	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
LTE Band 7	QPSK	15.3	±	0.75	24.5	±	0.75	18.5	±	0.75	18.0	±	0.75
LTE Band 12	QPSK	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
LTE Band 13	QPSK	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
LTE Band 17	QPSK	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
LTE Band 25	QPSK	17.5	±	0.75	24.3	±	0.75	19.3	±	0.75	19.8	±	0.75
LTE Band 26	QPSK	23.3	±	0.75	24.8	±	0.75	23.3	±	0.75	24.8	±	0.75
LTE Band 30	QPSK	16.5	±	0.75	23.8	±	0.75	18.5	±	0.75	21.8	±	0.75
LTE Band 41	QPSK	17.3	±	0.75	25.3	±	0.75	20.0	±	0.75	20.5	±	0.75
LTE Band 66	QPSK	18.0	±	0.75	24.8	±	0.75	18.8	±	0.75	20.3	±	0.75
LTE-uplink 2CA Band 7	QPSK	15.3	±	0.75	23.8	±	0.75	18.5	±	0.75	18.0	±	0.75
LTE-uplink 2CA Band 41	QPSK	17.3	±	0.75	23.8	±	0.75	19.3	±	0.75	20.5	±	0.75
RF Air interface	Mode	Max. Avg. RF Output Power (dBm)											
		MODE A		MODE B									
		UAT 1	LAT 3	UAT 1	LAT 3								
Bluetooth P _{low}	GFSK	10.0	10.0	10.0	10.0								
Bluetooth P _{high}	GFSK	12.0	16.5	13.5	13.5								
Bluetooth P _{standalone}	GFSK	14.5	19.5	16.5	16.5								

Notes:

1. LTE QPSK configuration has the highest maximum average output power per 3GPP standard.
2. LTE-uplink 2CA are the total combined power of the UL CA.
3. Bluetooth P_{high} is used when Wi-Fi antenna is active and Cellular antenna is inactive.
4. Bluetooth P_{low} is used with Wi-Fi and Cellular antennas are active or with Wi-Fi inactive and Cellular antenna is active.
5. Bluetooth P_{standalone} is used with Wi-Fi and Cellular antennas are inactive.

6.3.1. WLAN SISO ($P_{\text{Cell_ON}}$)

WLAN power will vary based on the state of the cellular transmitter for SISO and MIMO modes.

$P_{\text{Cell_ON}}$: This will be used when both Cellular and Wi-Fi radios are ON from Manufacturer KDB inquiry – Cellular State Dependent Wi-Fi Power control.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 DSSS	802.11b	1 Tx	1	2412	9.5	18.0	15.0	13.5	Yes
			6	2437	9.5	18.0	15.0	13.5	
			11	2462	9.5	18.0	15.0	13.5	
			12	2467	9.5	18.0	15.0	13.5	
			13	2472	9.5	17.0	15.0	13.5	
Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 OFDM	802.11g	1 Tx	1	2412	9.5	16.5	15.0	13.5	No
			6	2437	9.5	18.0	15.0	13.5	
			11	2462	9.5	16.5	15.0	13.5	
			12	2467	9.5	14.0	14.0	13.5	
			13	2472	6.0	6.0	6.0	6.0	
	802.11n	1 Tx HT20	1	2412	9.5	16.5	15.0	13.5	No
			6	2437	9.5	18.0	15.0	13.5	
			11	2462	9.5	16.5	15.0	13.5	
			12	2467	9.5	14.0	14.0	13.5	
			13	2472	6.0	6.0	6.0	6.0	

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
2. Sec. 5.2.2. of KDB 248227 D01 states: When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.2	802.11a	1 Tx	36	5180	7.3	17.5	14.0	9.0	No
			40	5200	7.3	19.5	14.0	9.0	
			44	5220	7.3	19.8	14.0	9.0	
			48	5240	7.3	19.8	14.0	9.0	
	802.11n	1 Tx HT20	36	5180	7.3	17.5	14.0	9.0	No
			40	5200	7.3	19.5	14.0	9.0	
			44	5220	7.3	19.8	14.0	9.0	
			48	5240	7.3	19.8	14.0	9.0	
		1 Tx HT40	38	5190	7.3	16.5	14.0	9.0	No
			46	5230	7.3	19.5	14.0	9.0	
	802.11ac	1 Tx VHT20	36	5180	7.3	17.5	14.0	9.0	No
			40	5200	7.3	19.5	14.0	9.0	
			44	5220	7.3	19.8	14.0	9.0	
			48	5240	7.3	19.8	14.0	9.0	
		1 Tx VHT40	38	5190	7.3	16.5	14.0	9.0	No
			46	5230	7.3	19.5	14.0	9.0	
		1 Tx VHT80	42	5210	7.3	15.5	14.0	9.0	Yes
5.3	802.11a	1 Tx	52	5260	5.8	19.8	13.0	9.5	Yes
			56	5280	5.8	19.8	13.0	9.5	
			60	5300	5.8	19.5	13.0	9.5	
			64	5320	5.8	16.5	13.0	9.5	
	802.11n	1 Tx HT20	52	5260	5.8	19.8	13.0	9.5	No
			56	5280	5.8	19.8	13.0	9.5	
			60	5300	5.8	19.5	13.0	9.5	
			64	5320	5.8	16.5	13.0	9.5	
		1 Tx HT40	54	5270	5.8	19.5	13.0	9.5	No
			62	5310	5.8	15.5	13.0	9.5	
	802.11ac	1 Tx VHT20	52	5260	5.8	19.8	13.0	9.5	No
			56	5280	5.8	19.8	13.0	9.5	
			60	5300	5.8	19.5	13.0	9.5	
			64	5320	5.8	16.5	13.0	9.5	
		1 Tx VHT40	54	5270	5.8	19.5	13.0	9.5	No
			62	5310	5.8	15.5	13.0	9.5	
		1 Tx VHT80	58	5290	5.8	15.0	13.0	9.5	Yes

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.5	802.11a	1 Tx	100	5500	4.5	16.5	11.5	10.0	Yes
			104	5520	4.5	19.5	11.5	10.0	
			108	5540	4.5	19.8	11.5	10.0	
			112	5560	4.5	19.8	11.5	10.0	
			116	5580	4.5	19.8	11.5	10.0	
			120	5600	4.5	19.8	11.5	10.0	
			124	5620	4.5	19.8	11.5	10.0	
			128	5640	4.5	19.8	11.5	10.0	
			132	5660	4.5	19.8	11.5	10.0	
			136	5680	4.5	19.5	11.5	10.0	
			140	5700	4.5	17.0	11.5	10.0	
			144	5720	4.5	19.8	11.5	10.0	
	802.11n	1 Tx HT20	100	5500	4.5	16.5	11.5	10.0	No
			104	5520	4.5	19.5	11.5	10.0	
			108	5540	4.5	19.8	11.5	10.0	
			112	5560	4.5	19.8	11.5	10.0	
			116	5580	4.5	19.8	11.5	10.0	
			120	5600	4.5	19.8	11.5	10.0	
			124	5620	4.5	19.8	11.5	10.0	
			128	5640	4.5	19.8	11.5	10.0	
			132	5660	4.5	19.8	11.5	10.0	
			136	5680	4.5	19.5	11.5	10.0	
			140	5700	4.5	17.0	11.5	10.0	
			144	5720	4.5	19.8	11.5	10.0	
		1 Tx HT40	102	5510	4.5	15.5	11.5	10.0	No
			110	5550	4.5	19.5	11.5	10.0	
			118	5590	4.5	19.5	11.5	10.0	
			126	5630	4.5	19.5	11.5	10.0	
			134	5670	4.5	18.0	11.5	10.0	
			142	5710	4.5	19.5	11.5	10.0	
	802.11ac	1 Tx VHT20	100	5500	4.5	16.5	11.5	10.0	No
			104	5520	4.5	19.5	11.5	10.0	
			108	5540	4.5	19.8	11.5	10.0	
			112	5560	4.5	19.8	11.5	10.0	
			116	5580	4.5	19.8	11.5	10.0	
			120	5600	4.5	19.8	11.5	10.0	
			124	5620	4.5	19.8	11.5	10.0	
			128	5640	4.5	19.8	11.5	10.0	
			132	5660	4.5	19.8	11.5	10.0	
			136	5680	4.5	19.5	11.5	10.0	
			140	5700	4.5	17.0	11.5	10.0	
			144	5720	4.5	19.8	11.5	10.0	
		1 Tx VHT40	102	5510	4.5	15.5	11.5	10.0	No
			110	5550	4.5	19.5	11.5	10.0	
			118	5590	4.5	19.5	11.5	10.0	
			126	5630	4.5	19.5	11.5	10.0	
			134	5670	4.5	18.0	11.5	10.0	
			142	5710	4.5	19.5	11.5	10.0	
1 Tx VHT80		106	5530	4.5	15.0	11.5	10.0	Yes	
		122	5610	4.5	19.0	11.5	10.0		
		138	5690	4.5	19.0	11.5	10.0		

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.8	802.11a	1 Tx	149	5745	5.3	19.8	11.5	10.3	Yes
			153	5765	5.3	19.8	11.5	10.3	
			157	5785	5.3	19.8	11.5	10.3	
			161	5805	5.3	19.8	11.5	10.3	
			165	5825	5.3	19.8	11.5	10.3	
	802.11n	1 Tx HT20	149	5745	5.3	19.8	11.5	10.3	No
			153	5765	5.3	19.8	11.5	10.3	
			157	5785	5.3	19.8	11.5	10.3	
			161	5805	5.3	19.8	11.5	10.3	
			165	5825	5.3	19.8	11.5	10.3	
		1 Tx HT40	151	5755	5.3	19.5	11.5	10.3	No
			159	5795	5.3	19.5	11.5	10.3	
	802.11ac	1 Tx VHT20	149	5745	5.3	19.8	11.5	10.3	No
			153	5765	5.3	19.8	11.5	10.3	
			157	5785	5.3	19.8	11.5	10.3	
			161	5805	5.3	19.8	11.5	10.3	
			165	5825	5.3	19.8	11.5	10.3	
		1 Tx VHT40	151	5755	5.3	19.5	11.5	10.3	No
			159	5795	5.3	19.5	11.5	10.3	
		1 Tx VHT80	155	5775	5.3	19.0	11.5	10.3	Yes

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

6.3.2. WLAN MIMO (P_{Cell_ON})

WLAN power will vary based on the state of the cellular transmitter for SISO and MIMO modes.

P_{Cell_ON} : This will be used when both Cellular and Wi-Fi radios are ON from Manufacturer KDB inquiry – Cellular State Dependent Wi-Fi Power control.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max.Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 OFDM	802.11g	2 Tx CDD	1	2412	9.5	15.5	15.0	13.5	Yes
			2	2417	9.5	18.0	15.0	13.5	
			6	2437	9.5	18.0	15.0	13.5	
			9	2452	9.5	18.0	15.0	13.5	
			10	2457	9.5	18.0	15.0	13.5	
			11	2462	9.5	15.5	15.0	13.5	
			12	2467	9.5	13.0	13.0	13.0	
			13	2472	5.0	5.0	5.0	5.0	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	1	2412	9.5	15.5	15.0	13.5	No
			2	2417	9.5	18.0	15.0	13.5	
			6	2437	9.5	18.0	15.0	13.5	
			9	2452	9.5	18.0	15.0	13.5	
			10	2457	9.5	18.0	15.0	13.5	
			11	2462	9.5	15.5	15.0	13.5	
			12	2467	9.5	13.0	13.0	13.0	
			13	2472	5.0	5.0	5.0	5.0	

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.2	802.11a	2 Tx CDD	36	5180	7.3	17.0	14.0	9.0	No
			40	5200	7.3	18.0	14.0	9.0	
			44	5220	7.3	18.0	14.0	9.0	
			48	5240	7.3	18.0	14.0	9.0	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	36	5180	7.3	17.0	14.0	9.0	No
			40	5200	7.3	18.0	14.0	9.0	
			44	5220	7.3	18.0	14.0	9.0	
			48	5240	7.3	18.0	14.0	9.0	
		2 Tx HT40 CDD/STBC/SDM	38	5190	7.3	15.0	14.0	9.0	Yes
			46	5230	7.3	19.5	14.0	9.0	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	36	5180	7.3	17.0	14.0	9.0	No
			40	5200	7.3	18.0	14.0	9.0	
			44	5220	7.3	18.0	14.0	9.0	
			48	5240	7.3	18.0	14.0	9.0	
		2 Tx VHT40 CDD/STBC/SDM	38	5190	7.3	15.0	14.0	9.0	No
			46	5230	7.3	19.5	14.0	9.0	
		2 Tx VHT80 CDD/STBC/SDM	42	5210	7.3	15.0	14.0	9.0	Yes
5.3	802.11a	2 Tx CDD	52	5260	5.8	18.0	13.0	9.5	No
			56	5280	5.8	18.0	13.0	9.5	
			60	5300	5.8	18.0	13.0	9.5	
			64	5320	5.8	16.0	13.0	9.5	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	52	5260	5.8	18.0	13.0	9.5	No
			56	5280	5.8	18.0	13.0	9.5	
			60	5300	5.8	18.0	13.0	9.5	
			64	5320	5.8	16.0	13.0	9.5	
		2 Tx HT40 CDD/STBC/SDM	54	5270	5.8	19.5	13.0	9.5	No
			62	5310	5.8	15.0	13.0	9.5	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	52	5260	5.8	18.0	13.0	9.5	No
			56	5280	5.8	18.0	13.0	9.5	
			60	5300	5.8	18.0	13.0	9.5	
			64	5320	5.8	16.0	13.0	9.5	
		2 Tx VHT40 CDD/STBC/SDM	54	5270	5.8	19.5	13.0	9.5	No
			62	5310	5.8	15.0	13.0	9.5	
		2 Tx VHT80 CDD/STBC/SDM	58	5290	5.8	14.5	13.0	9.5	No

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.5	802.11a	2 Tx CDD	100	5500	4.5	16.0	11.5	10.0	No
			104	5520	4.5	18.0	11.5	10.0	
			108	5540	4.5	18.0	11.5	10.0	
			112	5560	4.5	18.0	11.5	10.0	
			116	5580	4.5	18.0	11.5	10.0	
			120	5600	4.5	18.0	11.5	10.0	
			124	5620	4.5	18.0	11.5	10.0	
			128	5640	4.5	18.0	11.5	10.0	
			132	5660	4.5	18.0	11.5	10.0	
			136	5680	4.5	18.0	11.5	10.0	
			140	5700	4.5	16.5	11.5	10.0	
			144	5720	4.5	18.0	11.5	10.0	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	100	5500	4.5	16.0	11.5	10.0	No
			104	5520	4.5	18.0	11.5	10.0	
			108	5540	4.5	18.0	11.5	10.0	
			112	5560	4.5	18.0	11.5	10.0	
			116	5580	4.5	18.0	11.5	10.0	
			120	5600	4.5	18.0	11.5	10.0	
			124	5620	4.5	18.0	11.5	10.0	
			128	5640	4.5	18.0	11.5	10.0	
			132	5660	4.5	18.0	11.5	10.0	
			136	5680	4.5	18.0	11.5	10.0	
			140	5700	4.5	16.5	11.5	10.0	
			144	5720	4.5	18.0	11.5	10.0	
		2 Tx HT40 CDD/STBC/ SDM	102	5510	4.5	15.0	11.5	10.0	yes
			110	5550	4.5	19.5	11.5	10.0	
			118	5590	4.5	19.5	11.5	10.0	
			126	5630	4.5	19.5	11.5	10.0	
			134	5670	4.5	17.5	11.5	10.0	
			142	5710	4.5	19.5	11.5	10.0	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	100	5500	4.5	16.0	11.5	10.0	No
			104	5520	4.5	18.0	11.5	10.0	
			108	5540	4.5	18.0	11.5	10.0	
			112	5560	4.5	18.0	11.5	10.0	
			116	5580	4.5	18.0	11.5	10.0	
			120	5600	4.5	18.0	11.5	10.0	
			124	5620	4.5	18.0	11.5	10.0	
			128	5640	4.5	18.0	11.5	10.0	
			132	5660	4.5	18.0	11.5	10.0	
			136	5680	4.5	18.0	11.5	10.0	
			140	5700	4.5	16.5	11.5	10.0	
			144	5720	4.5	18.0	11.5	10.0	
		2 Tx VHT40 CDD/STBC/ SDM	102	5510	4.5	15.0	11.5	10.0	No
			110	5550	4.5	19.5	11.5	10.0	
			118	5590	4.5	19.5	11.5	10.0	
			126	5630	4.5	19.5	11.5	10.0	
			134	5670	4.5	17.5	11.5	10.0	
			142	5710	4.5	19.5	11.5	10.0	
		2 Tx VHT80 CDD/STBC/ SDM	106	5530	4.5	14.5	11.5	10.0	Yes
122			5610	4.5	19.0	11.5	10.0		
138			5690	4.5	19.0	11.5	10.0		

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.8	802.11a	2 Tx CDD	149	5745	5.3	19.8	11.5	10.3	Yes
			153	5765	5.3	19.8	11.5	10.3	
			157	5785	5.3	19.8	11.5	10.3	
			161	5805	5.3	19.8	11.5	10.3	
			165	5825	5.3	19.8	11.5	10.3	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	149	5745	5.3	19.8	11.5	10.3	No
			153	5765	5.3	19.8	11.5	10.3	
			157	5785	5.3	19.8	11.5	10.3	
			161	5805	5.3	19.8	11.5	10.3	
			165	5825	5.3	19.8	11.5	10.3	
		2 Tx HT40 CDD/STBC/SDM	151	5755	5.3	19.5	11.5	10.3	No
			159	5795	5.3	19.5	11.5	10.3	
			802.11ac	2 Tx VHT20 CDD/STBC/ SDM	149	5745	5.3	19.8	11.5
	153	5765			5.3	19.8	11.5	10.3	
	157	5785			5.3	19.8	11.5	10.3	
	161	5805			5.3	19.8	11.5	10.3	
	165	5825			5.3	19.8	11.5	10.3	
	2 Tx VHT40 CDD/STBC/SDM	151		5755	5.3	19.5	11.5	10.3	No
		159		5795	5.3	19.5	11.5	10.3	
	2 Tx VHT80 CDD/STBC/SDM	155		5775	5.3	19.0	11.5	10.3	Yes

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

6.3.3. WLAN SISO ($P_{\text{Cell_OFF}}$)

WLAN power will vary based on the state of the cellular transmitter for SISO and MIMO modes.

$P_{\text{Cell_OFF}}$: This will be used when only Wi-Fi radios is ON from Manufacturer KDB inquiry – Cellular State Dependent Wi-Fi Power control.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 DSSS	802.11b	1 Tx	1	2412	14.8	19.0	18.3	18.8	Yes
			2	2417	14.8	20.0	18.3	18.8	
			3	2422	14.8	20.0	18.3	18.8	
			4	2427	14.8	21.5	18.3	18.8	
			5	2432	14.8	21.5	18.3	18.8	
			6	2437	14.8	21.5	18.3	18.8	
			7	2442	14.8	20.0	18.3	18.8	
			8	2447	14.8	19.5	18.3	18.8	
			9	2452	14.8	19.5	18.3	18.8	
			10	2457	14.8	19.5	18.3	18.8	
			11	2462	14.8	19.0	18.3	18.8	
			12	2467	14.8	18.5	18.3	18.5	
			13	2472	14.8	17.0	17.0	17.0	
Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 OFDM	802.11g	1 Tx	1	2412	14.8	16.5	16.5	16.5	No
			2	2417	14.8	19.0	18.3	18.8	
			3	2422	14.8	21.0	18.3	18.8	
			4	2427	14.8	21.0	18.3	18.8	
			6	2437	14.8	21.0	18.3	18.8	
			7	2442	14.8	21.0	18.3	18.8	
			8	2447	14.8	21.0	18.3	18.8	
			9	2452	14.8	21.0	18.3	18.8	
			10	2457	14.8	19.0	18.3	18.8	
			11	2462	14.8	16.5	16.5	16.5	
			12	2467	14.0	14.0	14.0	14.0	
			13	2472	6.0	6.0	6.0	6.0	
			802.11n	1 Tx HT20	1	2412	14.8	16.5	
	2	2417			14.8	19.0	18.3	18.8	
	3	2422			14.8	21.0	18.3	18.8	
	4	2427			14.8	21.0	18.3	18.8	
	6	2437			14.8	21.0	18.3	18.8	
	7	2442			14.8	21.0	18.3	18.8	
	8	2447			14.8	21.0	18.3	18.8	
	9	2452			14.8	21.0	18.3	18.8	
	10	2457			14.8	19.0	18.3	18.8	
	11	2462			14.8	16.5	16.5	16.5	
	12	2467			14.0	14.0	14.0	14.0	
	13	2472	6.0	6.0	6.0	6.0			

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
2. Sec. 5.2.2. of KDB 248227 D01 states: When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.2	802.11a	1 Tx	36	5180	15.0	17.5	17.5	15.8	No
			40	5200	15.0	19.5	18.3	15.8	
			44	5220	15.0	21.0	18.3	15.8	
			48	5240	15.0	21.0	18.3	15.8	
	802.11n	1 Tx HT20	36	5180	15.0	17.5	17.5	15.8	No
			40	5200	15.0	19.5	18.3	15.8	
			44	5220	15.0	21.0	18.3	15.8	
			48	5240	15.0	21.0	18.3	15.8	
		1 Tx HT40	38	5190	15.0	16.5	16.5	15.8	Yes
			46	5230	15.0	19.5	18.3	15.8	
	802.11ac	1 Tx VHT20	36	5180	15.0	17.5	17.5	15.8	No
			40	5200	15.0	19.5	18.3	15.8	
			44	5220	15.0	21.0	18.3	15.8	
			48	5240	15.0	21.0	18.3	15.8	
		1 Tx VHT40	38	5190	15.0	16.5	16.5	15.8	No
			46	5230	15.0	19.5	18.3	15.8	
		1 Tx VHT80	42	5210	15.0	15.5	15.5	15.5	Yes
		5.3	802.11a	1 Tx	52	5260	13.5	21.0	17.3
56	5280				13.5	21.0	17.3	16.3	
60	5300				13.5	19.5	17.3	16.3	
64	5320				13.5	16.5	16.5	16.3	
802.11n	1 Tx HT20		52	5260	13.5	21.0	17.3	16.3	No
			56	5280	13.5	21.0	17.3	16.3	
			60	5300	13.5	19.5	17.3	16.3	
			64	5320	13.5	16.5	16.5	16.3	
	1 Tx HT40		54	5270	13.5	19.5	17.3	16.3	Yes
			62	5310	13.5	15.5	15.5	15.5	
802.11ac	1 Tx VHT20		52	5260	13.5	21.0	17.3	16.3	No
			56	5280	13.5	21.0	17.3	16.3	
			60	5300	13.5	19.5	17.3	16.3	
			64	5320	13.5	16.5	16.5	16.3	
	1 Tx VHT40		54	5270	13.5	19.5	17.3	16.3	No
			62	5310	13.5	15.5	15.5	15.5	
	1 Tx VHT80		58	5290	13.5	15.0	15.0	15.0	No

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.5	802.11a	1 Tx	100	5500	12.3	16.5	15.8	16.5	Yes
			104	5520	12.3	19.5	15.8	16.8	
			108	5540	12.3	21.0	15.8	16.8	
			112	5560	12.3	21.0	15.8	16.8	
			116	5580	12.3	21.0	15.8	16.8	
			120	5600	12.3	21.0	15.8	16.8	
			124	5620	12.3	21.0	15.8	16.8	
			128	5640	12.3	21.0	15.8	16.8	
			132	5660	12.3	21.0	15.8	16.8	
			136	5680	12.3	19.5	15.8	16.8	
			140	5700	12.3	17.0	15.8	16.8	
			144	5720	12.3	21.0	15.8	16.8	
	802.11n	1 Tx HT20	100	5500	12.3	16.5	15.8	16.5	No
			104	5520	12.3	19.5	15.8	16.8	
			108	5540	12.3	21.0	15.8	16.8	
			112	5560	12.3	21.0	15.8	16.8	
			116	5580	12.3	21.0	15.8	16.8	
			120	5600	12.3	21.0	15.8	16.8	
			124	5620	12.3	21.0	15.8	16.8	
			128	5640	12.3	21.0	15.8	16.8	
			132	5660	12.3	21.0	15.8	16.8	
			136	5680	12.3	19.5	15.8	16.8	
			140	5700	12.3	17.0	15.8	16.8	
			144	5720	12.3	21.0	15.8	16.8	
		1 Tx HT40	102	5510	12.3	15.5	15.5	15.5	No
			110	5550	12.3	19.5	15.8	16.8	
			118	5590	12.3	19.5	15.8	16.8	
			126	5630	12.3	19.5	15.8	16.8	
			134	5670	12.3	18.0	15.8	16.8	
			142	5710	12.3	19.5	15.8	16.8	
	802.11ac	1 Tx VHT20	100	5500	12.3	16.5	15.8	16.5	No
			104	5520	12.3	19.5	15.8	16.8	
			108	5540	12.3	21.0	15.8	16.8	
			112	5560	12.3	21.0	15.8	16.8	
			116	5580	12.3	21.0	15.8	16.8	
			120	5600	12.3	21.0	15.8	16.8	
			124	5620	12.3	21.0	15.8	16.8	
			128	5640	12.3	21.0	15.8	16.8	
			132	5660	12.3	21.0	15.8	16.8	
			136	5680	12.3	19.5	15.8	16.8	
			140	5700	12.3	17.0	15.8	16.8	
			144	5720	12.3	21.0	15.8	16.8	
		1 Tx VHT40	102	5510	12.3	15.5	15.5	15.5	No
			110	5550	12.3	19.5	15.8	16.8	
			118	5590	12.3	19.5	15.8	16.8	
126			5630	12.3	19.5	15.8	16.8		
134			5670	12.3	18.0	15.8	16.8		
142			5710	12.3	19.5	15.8	16.8		
1 Tx VHT80		106	5530	12.3	15.0	15.0	15.0	Yes	
		122	5610	12.3	19.0	15.8	16.8		
		138	5690	12.3	19.0	15.8	16.8		

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.8	802.11a	1 Tx	149	5745	13.0	21.0	15.8	17.0	Yes
			153	5765	13.0	21.0	15.8	17.0	
			157	5785	13.0	21.0	15.8	17.0	
			161	5805	13.0	21.0	15.8	17.0	
			165	5825	13.0	21.0	15.8	17.0	
	802.11n	1 Tx HT20	149	5745	13.0	21.0	15.8	17.0	No
			153	5765	13.0	21.0	15.8	17.0	
			157	5785	13.0	21.0	15.8	17.0	
			161	5805	13.0	21.0	15.8	17.0	
			165	5825	13.0	21.0	15.8	17.0	
		1 Tx HT40	151	5755	13.0	19.5	15.8	17.0	No
			159	5795	13.0	19.5	15.8	17.0	
	802.11ac	1 Tx VHT20	149	5745	13.0	21.0	15.8	17.0	No
			153	5765	13.0	21.0	15.8	17.0	
			157	5785	13.0	21.0	15.8	17.0	
			161	5805	13.0	21.0	15.8	17.0	
			165	5825	13.0	21.0	15.8	17.0	
		1 Tx VHT40	151	5755	13.0	19.5	15.8	17.0	No
			159	5795	13.0	19.5	15.8	17.0	
		1 Tx VHT80	155	5775	13.0	19.0	15.8	17.0	Yes

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

6.3.4. WLAN MIMO (P_{Cell_OFF})

WLAN power will vary based on the state of the cellular transmitter for SISO and MIMO modes.

P_{Cell_OFF}: This will be used when only Wi-Fi radios is ON from Manufacturer KDB inquiry – Cellular State Dependent Wi-Fi Power control.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 1	LAT 3	UAT 1	LAT 3	
2.4 OFDM	802.11g	2 Tx CDD	1	2412	14.8	15.5	15.5	15.5	Yes
			2	2417	14.8	18.0	18.0	18.0	
			3	2422	14.8	19.5	18.3	18.8	
			4	2427	14.8	21.0	18.3	18.8	
			6	2437	14.8	21.0	18.3	18.8	
			8	2447	14.8	21.0	18.3	18.8	
			9	2452	14.8	19.5	18.3	18.8	
			10	2457	14.8	18.0	18.0	18.0	
			11	2462	14.8	15.5	15.5	15.5	
			12	2467	13.0	13.0	13.0	13.0	
			13	2472	5.0	5.0	5.0	5.0	
	802.11g	2 Tx HT20 CDD/STBC/ SDM	1	2412	14.8	15.5	15.5	15.5	No
			2	2417	14.8	18.0	18.0	18.0	
			3	2422	14.8	19.5	18.3	18.8	
			4	2427	14.8	21.0	18.3	18.8	
			6	2437	14.8	21.0	18.3	18.8	
			8	2447	14.8	21.0	18.3	18.8	
			9	2452	14.8	19.5	18.3	18.8	
			10	2457	14.8	18.0	18.0	18.0	
			11	2462	14.8	15.5	15.5	15.5	
			12	2467	13.0	13.0	13.0	13.0	
			13	2472	5.0	5.0	5.0	5.0	

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.2	802.11a	2 Tx CDD	36	5180	15.0	17.0	17.0	15.8	No
			40	5200	15.0	18.0	18.0	15.8	
			44	5220	15.0	18.0	18.0	15.8	
			48	5240	15.0	18.0	18.0	15.8	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	36	5180	15.0	17.0	17.0	15.8	No
			40	5200	15.0	18.0	18.0	15.8	
			44	5220	15.0	18.0	18.0	15.8	
			48	5240	15.0	18.0	18.0	15.8	
		2 Tx HT40 CDD/STBC/SDM	38	5190	15.0	15.0	15.0	15.0	Yes
			46	5230	15.0	19.5	18.3	15.8	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	36	5180	15.0	17.0	17.0	15.8	No
			40	5200	15.0	18.0	18.0	15.8	
			44	5220	15.0	18.0	18.0	15.8	
			48	5240	15.0	18.0	18.0	15.8	
		2 Tx VHT40 CDD/STBC/SDM	38	5190	15.0	15.0	15.0	15.0	No
			46	5230	15.0	19.5	18.3	15.8	
		2 Tx VHT80 CDD/STBC/SDM	42	5210	15.0	15.0	15.0	15.0	No
5.3	802.11a	2 Tx CDD	52	5260	13.5	18.0	17.3	16.3	No
			56	5280	13.5	18.0	17.3	16.3	
			60	5300	13.5	18.0	17.3	16.3	
			64	5320	13.5	16.0	16.0	16.0	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	52	5260	13.5	18.0	17.3	16.3	No
			56	5280	13.5	18.0	17.3	16.3	
			60	5300	13.5	18.0	17.3	16.3	
			64	5320	13.5	16.0	16.0	16.0	
		2 Tx HT40 CDD/STBC/SDM	54	5270	13.5	19.5	17.3	16.3	No
			62	5310	13.5	15.0	15.0	15.0	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	52	5260	13.5	18.0	17.3	16.3	No
			56	5280	13.5	18.0	17.3	16.3	
			60	5300	13.5	18.0	17.3	16.3	
			64	5320	13.5	16.0	16.0	16.0	
		2 Tx VHT40 CDD/STBC/SDM	54	5270	13.5	19.5	17.3	16.3	No
			62	5310	13.5	15.0	15.0	15.0	
		2 Tx VHT80 CDD/STBC/SDM	58	5290	13.5	14.5	14.5	14.5	No

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.5	802.11a	2 Tx CDD	100	5500	12.3	16.0	15.8	16.0	No
			104	5520	12.3	18.0	15.8	16.8	
			108	5540	12.3	18.0	15.8	16.8	
			112	5560	12.3	18.0	15.8	16.8	
			116	5580	12.3	18.0	15.8	16.8	
			120	5600	12.3	18.0	15.8	16.8	
			124	5620	12.3	18.0	15.8	16.8	
			128	5640	12.3	18.0	15.8	16.8	
			132	5660	12.3	18.0	15.8	16.8	
			136	5680	12.3	18.0	15.8	16.8	
			140	5700	12.3	16.5	15.8	16.5	
			144	5720	12.3	18.0	15.8	16.8	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	100	5500	12.3	16.0	15.8	16.0	No
			104	5520	12.3	18.0	15.8	16.8	
			108	5540	12.3	18.0	15.8	16.8	
			112	5560	12.3	18.0	15.8	16.8	
			116	5580	12.3	18.0	15.8	16.8	
			120	5600	12.3	18.0	15.8	16.8	
			124	5620	12.3	18.0	15.8	16.8	
			128	5640	12.3	18.0	15.8	16.8	
			132	5660	12.3	18.0	15.8	16.8	
			136	5680	12.3	18.0	15.8	16.8	
			140	5700	12.3	16.5	15.8	16.5	
			144	5720	12.3	18.0	15.8	16.8	
		2 Tx HT40 CDD/STBC/ SDM	102	5510	12.3	15.0	15.0	15.0	Yes
			110	5550	12.3	19.5	15.8	16.8	
			118	5590	12.3	19.5	15.8	16.8	
			126	5630	12.3	19.5	15.8	16.8	
			134	5670	12.3	17.5	15.8	16.8	
			142	5710	12.3	19.5	15.8	16.8	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	100	5500	12.3	16.0	15.8	16.0	No
			104	5520	12.3	18.0	15.8	16.8	
			108	5540	12.3	18.0	15.8	16.8	
			112	5560	12.3	18.0	15.8	16.8	
			116	5580	12.3	18.0	15.8	16.8	
			120	5600	12.3	18.0	15.8	16.8	
			124	5620	12.3	18.0	15.8	16.8	
			128	5640	12.3	18.0	15.8	16.8	
			132	5660	12.3	18.0	15.8	16.8	
			136	5680	12.3	18.0	15.8	16.8	
			140	5700	12.3	16.5	15.8	16.5	
			144	5720	12.3	18.0	15.8	16.8	
		2 Tx VHT40 CDD/STBC/ SDM	102	5510	12.3	15.0	15.0	15.0	No
			110	5550	12.3	19.5	15.8	16.8	
			118	5590	12.3	19.5	15.8	16.8	
126			5630	12.3	19.5	15.8	16.8		
134			5670	12.3	17.5	15.8	16.8		
142			5710	12.3	19.5	15.8	16.8		
2 Tx VHT80 CDD/STBC/ SDM		106	5530	12.3	14.5	14.5	14.5	Yes	
		122	5610	12.3	19.0	15.8	16.8		
		138	5690	12.3	19.0	15.8	16.8		

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)				SAR Test (Yes/No)
					MODE A		MODE B		
					UAT 2	LAT 3	UAT 2	LAT 3	
5.8	802.11a	2 Tx CDD	149	5745	13.0	21.0	15.8	17.0	Yes
			153	5765	13.0	21.0	15.8	17.0	
			157	5785	13.0	21.0	15.8	17.0	
			161	5805	13.0	21.0	15.8	17.0	
			165	5825	13.0	21.0	15.8	17.0	
	802.11n	2 Tx HT20 CDD/STBC/ SDM	149	5745	13.0	21.0	15.8	17.0	No
			153	5765	13.0	21.0	15.8	17.0	
			157	5785	13.0	21.0	15.8	17.0	
			161	5805	13.0	21.0	15.8	17.0	
			165	5825	13.0	21.0	15.8	17.0	
		2 Tx HT40 CDD/STBC/SDM	151	5755	13.0	19.5	15.8	17.0	No
			159	5795	13.0	19.5	15.8	17.0	
	802.11ac	2 Tx VHT20 CDD/STBC/ SDM	149	5745	13.0	21.0	15.8	17.0	No
			153	5765	13.0	21.0	15.8	17.0	
			157	5785	13.0	21.0	15.8	17.0	
			161	5805	13.0	21.0	15.8	17.0	
			165	5825	13.0	21.0	15.8	17.0	
		2 Tx VHT40 CDD/STBC/SDM	151	5755	13.0	19.5	15.8	17.0	No
			159	5795	13.0	19.5	15.8	17.0	
		2 Tx VHT80 CDD/STBC/SDM	155	5775	13.0	19.0	15.8	17.0	Yes

Notes:

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

6.3.5. WLAN ($P_{\text{Cell_MAX}}$) and Bluetooth (P_{max})

The maximum output power listed within this Section is only applicable when the device is placed on a proprietary wireless charger. The wireless charger is a desktop device. When the DUT is placed on top of the wireless charger during charging, the DUT shall be kept at least 20cm away from the user in this configuration and is considered to be a mobile device. Refer to the separate MPE Report for evaluation in this use case.

UAT 1 and LAT 3

Band (GHz)	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)			
			802.11b (1Tx)	802.11g (1Tx)	HT20 (1Tx)	HT20 (2Tx)
2.4	1	2412	19.0	16.5	16.5	15.5
	2	2417	20.0	19.0	19.0	18.0
	3	2422	20.0	21.0	21.0	19.5
	4	2427	21.5	21.0	21.0	21.0
	5	2432	21.5	21.0	21.0	21.0
	6	2437	21.5	21.0	21.0	21.0
	7	2442	20.0	21.0	21.0	21.0
	8	2447	19.5	21.0	21.0	21.0
	9	2452	19.5	21.0	21.0	19.5
	10	2457	19.5	19.0	19.0	18.0
	11	2462	19.0	16.5	16.5	15.5
	12	2467	18.5	14.0	14.0	13.0
	13	2472	17.0	6.0	6.0	5.0

UAT 2 and LAT 3

Band (GHz)	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)		
			802.11a (1Tx)	HT20 (1Tx)	HT20 (2Tx)
5GHz	36	5180	17.5	17.5	17.0
	40	5200	19.5	19.5	18.0
	44	5220	21.0	21.0	18.0
	48	5240	21.0	21.0	18.0
	52	5260	21.0	21.0	18.0
	56	5280	21.0	21.0	18.0
	60	5300	19.5	19.5	18.0
	64	5320	16.5	16.5	16.0
	100	5500	16.5	16.5	16.0
	104	5520	19.5	19.5	18.0
	108	5540	21.0	21.0	18.0
	112	5560	21.0	21.0	18.0
	116	5580	21.0	21.0	18.0
	120	5600	21.0	21.0	18.0
	124	5620	21.0	21.0	18.0
	128	5640	21.0	21.0	18.0
	132	5660	21.0	21.0	18.0
	136	5680	19.5	19.5	18.0
	140	5700	17.0	17.0	16.5
	144	5720	21.0	21.0	18.0
	149	5745	21.0	21.0	21.0
	153	5765	21.0	21.0	21.0
	157	5785	21.0	21.0	21.0
	161	5805	21.0	21.0	21.0
	165	5825	21.0	21.0	21.0

Band (GHz)	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)	
			HT40 (1Tx)	HT40 (2Tx)
5GHz	38	5190	16.5	15.0
	46	5230	19.5	19.5
	54	5270	19.5	19.5
	62	5310	15.5	15.0
	102	5510	15.5	15.0
	110	5550	19.5	19.5
	118	5590	19.5	19.5
	126	5630	19.5	19.5
	134	5670	18.0	17.5
	142	5710	19.5	19.5
	151	5755	19.5	19.5
	159	5795	19.5	19.5

Band (GHz)	Ch #	Freq. (MHz)	Max. Avg. RF Output Power (dBm)	
			VHT80 (1Tx)	VHT80 (2Tx)
5GHz	42	5210	15.5	15.0
	58	5290	15.0	14.5
	106	5530	15.0	14.5
	122	5610	19.0	19.0
	138	5690	19.0	19.0
	155	5775	19.0	19.0

UAT 1 and LAT 3

RF Air interface	Mode	Max. Avg. RF Output Power (dBm)	
		UAT 1	LAT 3
Bluetooth P _{max}	GFSK	20.0	20.0

6.4. General LTE SAR Test and Reporting Considerations

Item	Description					
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	18700/ 1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5
						18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5
						19193/ 1909.3
	Band 4	Frequency range: 1710 - 1755 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5
						19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5
						20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5
						20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5
						20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5
						20643/ 848.3
	Band 7	Frequency range: 2500 - 2570 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	20850 2510	20825 2507.5	20800 2505	20775 2502.5	
	Mid	21100 2535	21100 2535	21100 2535	21100 2535	
	High	21350 2560	21375 2562.5	21400 2565	21425 2567.5	
	Band 12	Frequency range: 699 – 716 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low				23035/ 701.5	23025/ 700.5
						23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5
						23095/ 707.5
	High				23155/ 713.5	23165/ 714.5
						23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low					
	Mid			23230/ 782	23230/ 782	
	High					

General LTE SAR Test and Reporting Considerations (Continued)

Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 17	Frequency range: 704 - 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low				23755/ 706.5		
	Mid			23790/ 710	23790/ 710		
	High				23825/ 713.5		
	Band 25	Frequency range: 1850 - 1915 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	26140/ 1860	26115/ 1857.5	26090/ 1855	26065/ 1852.5	26055/ 1851.5	26047/ 1850.7
	Mid	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5
	High	26590/ 1905	26615/ 1907.5	26640/ 1910	26665/ 1912.5	26675/ 1913.5	26683/ 1914.3
	Band 26	Frequency range: 814 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			26740/ 819	26715/ 816.5	26705/ 815.5	26697/ 814.7
	Mid			26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5
	High			26990/ 844	27015/ 846.5	27025/ 847.5	27033/ 848.3
	Band 30	Frequency range: 2305 - 2315 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low						
	Mid			27710/ 2310	27710/ 2310		
	High						
	Band 41	Frequency range: 2496 - 2690 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	39750 / 2506.0					
	Low-Mid	40185 / 2549.5					
	Mid	40620 / 2593.0					
	Mid-High	41055 / 2636.5					
	High	41490 / 2680.0					
	Band 66	Frequency range: 1710 - 1780 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5		
	Mid	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745		
	High	132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5		
LTE transmitter and antenna implementation	LTE can transmit from either UAT 1 or LAT 1. The antenna switching is implemented with a physical, "break-before-make" switch such that only one antenna can be used for LTE transmission at a time.						

Maximum power reduction (MPR)	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table> MPR Built-in by design. The manufacturer Target MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing.	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																							
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																
256 QAM	≥ 1						≤ 5																																																																
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																						

Notes:

1. SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.5. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-	-	-

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \# \text{ of S} + \# \text{ of U}$

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048) \text{ seconds}$

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used-configuration 0 at 63.3% duty cycle.


7. RF Exposure Conditions (Test Configurations)

WWAN antennas are located near the upper and lower edge of the device. The upper antenna for 2.4 GHz WLAN and Bluetooth (UAT 1) is shared and is located near the upper right corner of the device, while the upper antenna for 5 GHz WLAN (UAT 2) is located near the upper left corner of the device. All WLAN bands and Bluetooth share the same lower antenna (LAT3), and this is located near the lower right corner of the device. Refer to Antenna Diagram below:

Refer to separate filing submission document for the proprietary design details of the antenna-to-antenna and antenna-to-antenna-to-edge(s) distances.

The Body-worn accessory test configurations were tested using a conservative minimum test separation distance of 5 mm.

Antenna Diagram

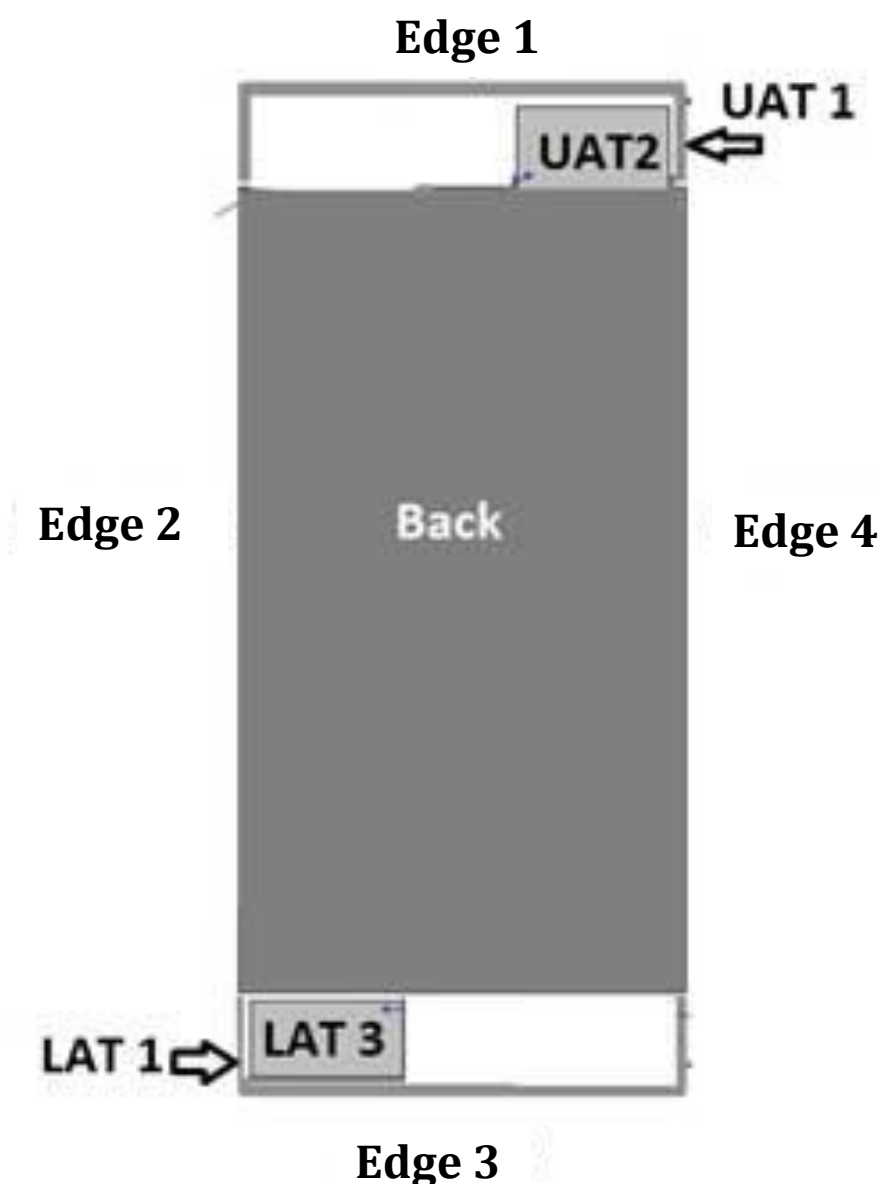

Upper Antenna

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN (UAT 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	5 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
	Hotspot	5 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
WLAN 2.4 GHz and Bluetooth (UAT 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	5 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
	Hotspot	5 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
WLAN 5 GHz (UAT 2)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	5 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
	Hotspot	5 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	

Notes:

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot Mode.
2. The Body-worn minimum separation distance is 5 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 5 mm.

Lower Antenna

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN (LAT 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	5 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
	Hotspot	5 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
WLAN and Bluetooth (LAT 3)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	5 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
	Hotspot	5 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	

Notes:

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot Mode.
2. The Body-worn minimum separation distance is 5 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 5 mm.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
A	6/30/2017	835	Body	835	54.10	55.20	-1.99	1.01	0.97	4.33
				805	54.43	55.33	-1.63	0.98	0.97	1.47
				905	53.42	55.00	-2.87	1.09	1.05	3.09
A	7/5/2017	835	Body	835	53.39	55.20	-3.28	1.01	0.97	4.43
				805	53.68	55.33	-2.99	0.97	0.97	-0.22
				905	52.66	55.00	-4.25	1.07	1.05	1.19
A	7/7/2017	2300	Head	2300	39.00	39.47	-1.20	1.72	1.66	3.56
				2350	38.81	39.38	-1.46	1.78	1.71	4.12
				2400	39.30	39.30	-1.77	1.83	1.75	4.59
A	7/9/2017	835	Body	835	54.09	55.20	-2.01	0.98	0.97	1.47
				805	54.32	55.33	-1.83	0.96	0.97	-1.04
				905	53.43	55.00	-2.85	1.06	1.05	0.24
A	7/9/2017	2300	Body	2300	51.84	52.90	-2.01	1.85	1.80	2.58
				2350	51.69	52.84	-2.17	1.91	1.85	3.20
				2400	51.56	52.77	-2.30	1.97	1.90	3.63
A	7/9/2017	2300	Head	2300	38.41	39.47	-2.69	1.71	1.66	2.54
				2350	38.21	39.38	-2.98	1.76	1.71	2.95
				2400	38.03	39.30	-3.22	1.81	1.75	3.33
A	7/12/2017	2600	Body	2600	50.17	52.51	-4.46	2.23	2.16	3.02
				2495	50.42	52.64	-4.22	2.09	2.01	3.86
				2690	49.91	52.40	-4.75	2.33	2.29	1.91
A	7/14/2017	2600	Head	2600	37.69	39.01	-3.39	2.01	1.96	2.44
				2495	38.11	39.14	-2.64	1.89	1.85	2.40
				2690	37.29	38.90	-4.13	2.11	2.06	2.26
A	7/17/2017	2300	Head	2300	39.90	39.47	1.08	1.70	1.66	1.94
				2350	39.70	39.38	0.80	1.75	1.71	2.24
				2400	39.55	39.30	0.64	1.80	1.75	2.59
A	7/17/2017	2300	Body	2300	52.46	52.90	-0.84	1.82	1.80	1.14
				2350	52.31	52.84	-1.00	1.88	1.85	1.42
				2400	52.18	52.77	-1.12	1.93	1.90	1.47
A	7/18/2017	835	Body	835	55.18	55.20	-0.04	1.00	0.97	2.98
				805	55.48	55.33	0.26	0.97	0.97	0.09
				905	54.58	55.00	-0.76	1.07	1.05	1.38
A	7/18/2017	2600	Head	2600	39.67	39.01	1.69	2.04	1.96	3.71
				2495	40.03	39.14	2.27	1.91	1.85	3.48
				2690	39.37	38.90	1.22	2.14	2.06	3.86
A	7/18/2017	2600	Body	2600	50.76	52.51	-3.33	2.20	2.16	1.67
				2495	51.17	52.64	-2.80	2.08	2.01	3.12
				2690	50.49	52.40	-3.64	2.30	2.29	0.73
A	7/21/2017	2600	Head	2600	37.79	39.01	-3.13	2.02	1.96	3.10
				2495	38.14	39.14	-2.56	1.90	1.85	2.94
				2690	37.50	38.90	-3.59	2.13	2.06	3.18
A	7/21/2017	2600	Body	2600	51.99	52.51	-0.99	2.22	2.16	2.83
				2495	52.33	52.64	-0.60	2.09	2.01	4.01
				2690	51.86	52.40	-1.03	2.33	2.29	1.95

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
B	6/30/2017	750	Body	750	53.62	55.55	-3.47	0.96	0.96	0.13
				695	54.15	55.76	-2.88	0.91	0.96	-4.65
				790	53.24	55.39	-3.89	1.01	0.97	4.02
B	7/1/2017	750	Head	750	41.87	41.96	-0.22	0.93	0.89	4.08
				695	42.69	42.24	1.06	0.88	0.89	-1.56
				790	41.31	41.76	-1.07	0.97	0.90	8.21
B	7/7/2017	1750	Body	1750	51.21	53.44	-4.17	1.49	1.49	0.12
				1710	51.36	53.54	-4.08	1.45	1.46	-0.93
				1755	51.19	53.43	-4.19	1.49	1.49	0.32
B	7/9/2017	1750	Head	1750	38.23	40.08	-4.63	1.35	1.37	-1.75
				1710	38.40	40.15	-4.35	1.31	1.35	-3.08
				1755	38.19	40.08	-4.71	1.35	1.37	-1.52
B	7/10/2017	1750	Body	1750	51.11	53.44	-4.36	1.51	1.49	1.60
				1710	51.15	53.54	-4.47	1.47	1.46	0.72
				1755	51.07	53.43	-4.41	1.52	1.49	1.86
B	7/13/2017	1750	Head	1750	38.68	40.08	-3.50	1.36	1.37	-0.51
				1710	38.86	40.15	-3.20	1.32	1.35	-2.04
				1755	38.65	40.08	-3.56	1.37	1.37	-0.35
B	7/13/2017	1750	Body	1750	51.38	53.44	-3.86	1.43	1.49	-4.11
				1710	51.40	53.54	-4.00	1.39	1.46	-4.89
				1755	51.37	53.43	-3.85	1.43	1.49	-3.84
B	7/16/2017	2450	Body	2450	50.26	52.70	-4.63	2.05	1.95	4.92
				2400	50.54	52.77	-4.23	1.98	1.90	4.16
				2480	50.12	52.66	-4.83	2.09	1.99	4.91
B	7/17/2017	2450	Head	2450	39.60	39.20	1.02	1.81	1.80	0.72
				2400	39.75	39.30	1.15	1.75	1.75	0.13
				2480	39.48	39.16	0.81	1.85	1.83	0.69
B	7/20/2017	2450	Body	2450	51.48	52.70	-2.31	2.01	1.95	2.82
				2400	51.68	52.77	-2.07	1.94	1.90	2.21
				2480	51.37	52.66	-2.45	2.04	1.99	2.55
B	7/21/2017	2450	Head	2450	39.51	39.20	0.79	1.86	1.80	3.11
				2400	39.73	39.30	1.10	1.79	1.75	2.02
				2480	39.41	39.16	0.63	1.89	1.83	3.09

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
C	7/1/2017	1900	Body	1900	51.96	53.30	-2.51	1.57	1.52	3.29
				1850	52.10	53.30	-2.25	1.52	1.52	0.26
				1920	51.94	53.30	-2.55	1.59	1.52	4.54
C	7/1/2017	1900	Head	1900	40.20	40.00	0.50	1.45	1.40	3.50
				1850	40.39	40.00	0.98	1.40	1.40	0.00
				1920	40.15	40.00	0.37	1.47	1.40	4.86
C	7/5/2017	1900	Body	1900	51.93	53.30	-2.57	1.54	1.52	1.45
				1850	51.94	53.30	-2.55	1.51	1.52	-0.72
				1920	51.98	53.30	-2.48	1.56	1.52	2.43
C	7/5/2017	1900	Head	1900	38.68	40.00	-3.30	1.38	1.40	-1.21
				1850	38.73	40.00	-3.18	1.35	1.40	-3.64
				1920	38.68	40.00	-3.30	1.39	1.40	-0.50
C	7/9/2017	1900	Head	1900	38.91	40.00	-2.73	1.45	1.40	3.71
				1850	39.13	40.00	-2.17	1.41	1.40	0.36
				1920	38.84	40.00	-2.90	1.47	1.40	4.93
C	7/9/2017	1900	Body	1900	50.83	53.30	-4.63	1.57	1.52	3.09
				1850	50.99	53.30	-4.33	1.52	1.52	0.13
				1920	50.78	53.30	-4.73	1.58	1.52	4.21
C	7/16/2017	1900	Head	1900	38.51	40.00	-3.73	1.42	1.40	1.14
				1850	38.72	40.00	-3.20	1.37	1.40	-2.14
				1920	38.39	40.00	-4.03	1.43	1.40	2.29
C	7/16/2017	1900	Body	1900	53.85	53.30	1.03	1.57	1.52	3.49
				1850	53.97	53.30	1.26	1.52	1.52	-0.07
				1920	53.75	53.30	0.84	1.59	1.52	4.54
C	7/19/2017	1900	Head	1900	39.99	40.00	-0.02	1.43	1.40	1.93
				1850	40.13	40.00	0.33	1.39	1.40	-1.00
				1920	39.91	40.00	-0.23	1.45	1.40	3.29
C	7/19/2017	1900	Body	1900	53.84	53.30	1.01	1.56	1.52	2.76
				1850	53.95	53.30	1.22	1.52	1.52	-0.07
				1920	53.78	53.30	0.90	1.58	1.52	3.95
C	7/23/2017	1900	Head	1900	38.76	40.00	-3.10	1.43	1.40	2.07
				1850	38.97	40.00	-2.58	1.39	1.40	-1.07
				1920	38.69	40.00	-3.28	1.44	1.40	3.14
C	7/23/2017	1900	Body	1900	52.60	53.30	-1.31	1.58	1.52	3.62
				1850	52.71	53.30	-1.11	1.53	1.52	0.46
				1920	52.56	53.30	-1.39	1.59	1.52	4.41

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
D	6/29/2017	835	Head	835	42.14	41.50	1.54	0.92	0.90	2.02
				805	42.55	41.68	2.09	0.89	0.90	-0.96
				905	41.33	41.50	-0.41	0.98	0.97	0.72
D	6/29/2017	835	Body	835	54.58	55.20	-1.12	1.01	0.97	3.81
				805	54.88	55.33	-0.82	0.98	0.97	0.90
				905	53.89	55.00	-2.02	1.07	1.05	1.85
D	7/2/2017	835	Head	835	41.89	41.50	0.94	0.91	0.90	1.52
				805	42.26	41.68	1.39	0.89	0.90	-1.32
				905	41.05	41.50	-1.08	0.98	0.97	0.80
D	7/5/2017	835	Head	835	42.84	41.50	3.23	0.92	0.90	2.64
				805	43.15	41.68	3.53	0.88	0.90	-2.34
				905	42.02	41.50	1.25	0.97	0.97	-0.58
D	7/6/2017	2600	Head	2600	37.88	39.01	-2.90	1.95	1.96	-0.87
				2495	38.24	39.14	-2.31	1.83	1.85	-0.85
				2690	37.59	38.90	-3.36	2.04	2.06	-1.09
D	7/8/2017	835	Head	835	43.10	41.50	3.86	0.93	0.90	2.98
				805	43.41	41.68	4.15	0.90	0.90	-0.20
				905	42.28	41.50	1.88	0.99	0.97	1.93
D	7/9/2017	835	Body	835	53.68	55.20	-2.75	0.99	0.97	1.67
				805	53.90	55.33	-2.59	0.96	0.97	-0.75
				905	52.98	55.00	-3.67	1.05	1.05	0.14
D	7/9/2017	2600	Head	2600	39.62	39.01	1.56	2.02	1.96	2.69
				2495	39.97	39.14	2.11	1.89	1.85	2.18
				2690	39.29	38.90	1.01	2.11	2.06	2.60
D	7/10/2017	2600	Body	2600	50.15	52.51	-4.50	2.25	2.16	3.94
				2495	50.44	52.64	-4.19	2.11	2.01	4.91
				2690	49.90	52.40	-4.77	2.37	2.29	3.62
D	7/13/2017	2600	Body	2600	50.48	52.51	-3.87	2.19	2.16	1.35
				2495	50.64	52.64	-3.81	2.07	2.01	2.67
				2690	50.31	52.40	-3.98	2.30	2.29	0.34
D	7/15/2017	2600	Head	2600	38.22	39.01	-2.03	2.03	1.96	3.46
				2495	38.59	39.14	-1.41	1.91	1.85	3.32
				2690	37.88	38.90	-2.62	2.13	2.06	3.38
D	7/17/2017	2600	Body	2600	51.27	52.51	-2.36	2.23	2.16	3.06
				2495	51.61	52.64	-1.96	2.10	2.01	4.26
				2690	50.89	52.40	-2.88	2.33	2.29	2.00
D	7/20/2017	2600	Body	2600	50.21	52.51	-4.38	2.19	2.16	1.21
				2495	50.53	52.64	-4.01	2.06	2.01	2.37
				2690	49.96	52.40	-4.65	2.29	2.29	0.16
D	7/21/2017	2600	Head	2600	39.23	39.01	0.56	2.06	1.96	4.83
				2495	39.59	39.14	1.14	1.94	1.85	4.73
				2690	38.91	38.90	0.03	2.16	2.06	4.64
D	7/22/2017	2450	Body	2450	54.63	52.70	3.66	2.01	1.95	3.08
				2400	54.79	52.77	3.82	1.95	1.90	2.79
				2480	54.57	52.66	3.62	2.04	1.99	2.55

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
E	7/5/2017	5600	Body	5600	47.12	48.48	-2.80	5.84	5.76	1.28
				5500	47.05	48.61	-3.22	5.85	5.64	3.68
				5725	47.11	48.31	-2.48	6.04	5.91	2.27
E	7/5/2017	5600	Head	5600	37.01	35.53	4.15	5.01	5.06	-1.07
				5500	37.07	35.65	3.99	5.00	4.96	0.79
				5725	36.87	35.39	4.18	5.16	5.19	-0.48
E	7/8/2017	5600	Body	5600	47.39	48.48	-2.24	5.93	5.76	2.85
				5500	47.55	48.61	-2.19	5.81	5.64	2.90
				5725	47.18	48.31	-2.34	6.10	5.91	3.25
E	7/8/2017	5600	Head	5600	36.83	35.53	3.65	5.00	5.06	-1.17
				5500	36.98	35.65	3.74	4.91	4.96	-1.05
				5725	36.68	35.39	3.64	5.13	5.19	-1.04
E	7/12/2017	5600	Body	5600	46.71	48.48	-3.65	5.93	5.76	2.93
				5500	46.87	48.61	-3.59	5.80	5.64	2.77
				5725	46.57	48.31	-3.60	6.11	5.91	3.36
E	7/12/2017	5600	Head	5600	36.45	35.53	2.58	4.94	5.06	-2.36
				5500	36.57	35.65	2.59	4.79	4.96	-3.37
				5725	36.30	35.39	2.57	5.09	5.19	-1.95
E	7/16/2017	5600	Head	5600	35.31	35.53	-0.63	4.89	5.06	-3.40
				5500	35.45	35.65	-0.56	4.78	4.96	-3.65
				5725	35.10	35.39	-0.82	5.03	5.19	-3.07
E	7/16/2017	5600	Body	5600	47.11	48.48	-2.82	5.97	5.76	3.70
				5500	47.62	48.61	-2.04	5.88	5.64	4.16
				5725	46.15	48.31	-4.47	6.05	5.91	2.41
E	7/20/2017	5600	Head	5600	35.69	35.53	0.44	4.91	5.06	-3.05
				5500	35.87	35.65	0.62	4.80	4.96	-3.27
				5725	35.56	35.39	0.48	5.06	5.19	-2.57
E	7/20/2017	5600	Body	5600	46.95	48.48	-3.15	5.96	5.76	3.40
				5500	47.13	48.61	-3.05	5.83	5.64	3.22
				5725	46.80	48.31	-3.12	6.16	5.91	4.24
E	7/24/2017	5600	Head	5600	36.53	35.53	2.80	5.11	5.06	0.92
				5500	36.68	35.65	2.90	5.01	4.96	1.09
				5725	36.68	35.39	3.64	5.26	5.19	1.33
E	7/24/2017	5600	Body	5600	47.28	48.48	-2.47	5.95	5.76	3.30
				5500	47.48	48.61	-2.33	5.84	5.64	3.41
				5725	47.19	48.31	-2.32	6.15	5.91	4.03

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
F	7/5/2017	2450	Body	2450	51.97	52.70	-1.39	2.01	1.95	2.97
				2400	52.17	52.77	-1.14	1.94	1.90	2.21
				2480	51.84	52.66	-1.56	2.05	1.99	2.90
F	7/5/2017	2450	Head	2450	41.00	39.20	4.59	1.74	1.80	-3.17
				2400	41.17	39.30	4.77	1.69	1.75	-3.41
				2480	40.91	39.16	4.46	1.78	1.83	-2.92
F	7/8/2017	2450	Body	2450	52.43	52.70	-0.51	1.99	1.95	2.15
				2400	52.53	52.77	-0.46	1.92	1.90	1.11
				2480	52.29	52.66	-0.71	2.02	1.99	1.50
F	7/8/2017	2450	Head	2450	39.04	39.20	-0.41	1.86	1.80	3.28
				2400	39.19	39.30	-0.27	1.80	1.75	2.65
				2480	38.93	39.16	-0.59	1.89	1.83	3.03
F	7/8/2017	2600	Head	2600	38.45	39.01	-1.44	2.03	1.96	3.46
				2495	38.85	39.14	-0.75	1.91	1.85	3.05
				2690	38.10	38.90	-2.05	2.14	2.06	3.86
F	7/8/2017	2600	Body	2600	51.86	52.51	-1.24	2.19	2.16	1.40
				2495	52.21	52.64	-0.82	2.04	2.01	1.38
				2690	51.51	52.40	-1.69	2.32	2.29	1.56
F	7/12/2017	2450	Head	2450	39.18	39.20	-0.05	1.88	1.80	4.61
				2400	39.36	39.30	0.16	1.82	1.75	4.13
				2480	39.08	39.16	-0.21	1.92	1.83	4.62
F	7/12/2017	2450	Body	2450	52.59	52.70	-0.21	2.02	1.95	3.49
				2400	52.76	52.77	-0.02	1.95	1.90	2.79
				2480	52.50	52.66	-0.31	2.06	1.99	3.46
F	7/12/2017	2600	Head	2600	37.85	39.01	-2.98	2.05	1.96	4.68
				2495	38.26	39.14	-2.26	1.93	1.85	4.24
				2690	37.47	38.90	-3.67	2.15	2.06	4.59
F	7/12/2017	2600	Body	2600	51.64	52.51	-1.66	2.26	2.16	4.73
				2495	52.03	52.64	-1.16	2.11	2.01	4.61
				2690	51.30	52.40	-2.09	2.39	2.29	4.36
F	7/16/2017	2450	Head	2450	38.18	39.20	-2.60	1.89	1.80	4.78
				2400	38.37	39.30	-2.36	1.82	1.75	4.13
				2480	38.05	39.16	-2.84	1.92	1.83	4.94
F	7/16/2017	2450	Body	2450	53.82	52.70	2.13	1.96	1.95	0.36
				2400	53.98	52.77	2.29	1.88	1.90	-0.90
				2480	53.73	52.66	2.03	2.00	1.99	0.34
F	7/20/2017	2450	Head	2450	37.75	39.20	-3.70	1.88	1.80	4.56
				2400	37.95	39.30	-3.43	1.82	1.75	3.96
				2480	37.64	39.16	-3.89	1.92	1.83	4.56
F	7/20/2017	2450	Body	2450	51.14	52.70	-2.96	1.98	1.95	1.28
				2400	51.27	52.77	-2.85	1.91	1.90	0.47
				2480	51.03	52.66	-3.10	2.01	1.99	0.85
F	7/24/2017	2450	Head	2450	40.11	39.20	2.32	1.83	1.80	1.61
				2400	40.25	39.30	2.43	1.77	1.75	0.82
				2480	39.99	39.16	2.11	1.86	1.83	1.45
F	7/24/2017	2450	Body	2450	52.77	52.70	0.13	1.91	1.95	-2.21
				2400	52.86	52.77	0.17	1.84	1.90	-3.32
				2480	52.66	52.66	0.00	1.94	1.99	-2.62

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
G	7/8/2017	5800	Body	5800	47.70	48.20	-1.04	6.18	6.00	3.00
				5700	47.86	48.34	-1.00	6.05	5.88	2.97
				5850	47.60	48.20	-1.24	6.26	6.00	4.30
G	7/8/2017	5800	Head	5800	36.95	35.30	4.67	5.14	5.27	-2.50
				5700	37.08	35.42	4.69	5.03	5.16	-2.61
				5850	36.83	35.30	4.33	5.20	5.27	-1.27
G	7/12/2017	5800	Head	5800	35.14	35.30	-0.45	5.15	5.27	-2.22
				5700	35.24	35.42	-0.51	5.06	5.16	-2.04
				5850	35.09	35.30	-0.59	5.21	5.27	-1.12
G	7/12/2017	5800	Body	5800	45.92	48.20	-4.73	6.10	6.00	1.63
				5700	46.01	48.34	-4.82	5.98	5.88	1.79
				5850	45.82	48.20	-4.94	6.18	6.00	2.93
G	7/16/2017	5800	Head	5800	34.62	35.30	-1.93	5.05	5.27	-4.16
				5700	34.76	35.42	-1.86	4.94	5.16	-4.23
				5850	34.64	35.30	-1.87	5.10	5.27	-3.17
G	7/16/2017	5800	Body	5800	46.68	48.20	-3.15	6.09	6.00	1.43
				5700	46.91	48.34	-2.96	5.95	5.88	1.15
				5850	46.75	48.20	-3.01	6.18	6.00	3.03
G	7/20/2017	5800	Body	5800	48.14	48.20	-0.12	5.79	6.00	-3.43
				5700	48.22	48.34	-0.25	5.68	5.88	-3.45
				5850	48.03	48.20	-0.35	5.85	6.00	-2.45
G	7/20/2017	5800	Head	5800	35.39	35.30	0.25	5.11	5.27	-3.04
				5700	35.55	35.42	0.37	5.01	5.16	-2.97
				5850	35.37	35.30	0.20	5.17	5.27	-1.86
G	7/24/2017	5800	Head	5800	36.11	35.30	2.29	5.14	5.27	-2.41
				5700	36.20	35.42	2.20	5.05	5.16	-2.26
				5850	36.01	35.30	2.01	5.20	5.27	-1.33
G	7/24/2017	5800	Body	5800	47.10	48.20	-2.28	6.22	6.00	3.72
				5700	47.20	48.34	-2.36	6.10	5.88	3.80
				5850	46.96	48.20	-2.57	6.30	6.00	4.92

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
H	7/12/2017	5200	Head	5200	37.24	35.99	3.47	4.47	4.65	-3.96
				5150	37.29	36.05	3.45	4.42	4.60	-3.97
				5350	37.08	35.82	3.52	4.62	4.80	-3.82
H	7/12/2017	5200	Body	5200	48.44	49.02	-1.18	5.44	5.29	2.76
				5150	48.53	49.09	-1.14	5.37	5.24	2.46
				5350	48.21	48.82	-1.24	5.65	5.47	3.26
H	7/16/2017	5200	Head	5200	37.40	35.99	3.92	4.58	4.65	-1.48
				5150	37.47	36.05	3.95	4.52	4.60	-1.65
				5350	37.21	35.82	3.88	4.72	4.80	-1.76
H	7/17/2017	5200	Body	5200	48.37	49.02	-1.33	5.41	5.29	2.22
				5150	48.42	49.09	-1.36	5.36	5.24	2.28
				5350	48.14	48.82	-1.39	5.58	5.47	2.00
H	7/20/2017	5200	Head	5200	34.54	35.99	-4.03	4.51	4.65	-2.97
				5150	34.61	36.05	-3.99	4.46	4.60	-3.10
				5350	34.36	35.82	-4.07	4.65	4.80	-3.32
H	7/21/2017	5200	Body	5200	48.75	49.02	-0.55	5.45	5.29	2.93
				5150	48.87	49.09	-0.44	5.38	5.24	2.72
				5350	48.51	48.82	-0.63	5.64	5.47	3.08
H	7/24/2017	5200	Head	5200	37.17	35.99	3.28	4.70	4.65	0.95
				5150	37.24	36.05	3.31	4.64	4.60	0.87
				5350	36.97	35.82	3.21	4.85	4.80	0.97
H	7/25/2017	5200	Body	5200	48.57	49.02	-0.92	5.44	5.29	2.80
				5150	48.65	49.09	-0.89	5.38	5.24	2.78
				5350	48.27	48.82	-1.12	5.65	5.47	3.23

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab	Date	Tissue Type	Dipole Type Serial #	Dipole Cal. Due Date	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
A	6/30/2017	Body	D835V2 SN:4d002	11/8/2017	0.948	9.48	9.55	-0.73	0.626	6.26	6.33	-1.11	
A	7/5/2017	Body	D835V2 SN:4d117	5/22/2018	1.050	10.50	10.39	1.06	0.685	6.85	6.76	1.33	1,2
A	7/7/2017	Head	D2300V2 SN:1002	3/10/2018	5.000	50.00	49.50	1.01	2.340	23.40	23.60	-0.85	
A	7/9/2017	Body	D835V2 SN:4d117	5/22/2018	1.050	10.50	10.39	1.06	0.684	6.84	6.76	1.18	
A	7/9/2017	Body	D2300V2 SN:1002	3/10/2018	4.610	46.10	47.90	-3.76	2.200	22.00	23.10	-4.76	3,4
A	7/9/2017	Head	D2300V2 SN:1002	3/10/2018	5.010	50.10	49.50	1.21	2.350	23.50	23.60	-0.42	
A	7/12/2017	Body	D2600V2 SN:1006	9/13/2017	5.340	53.40	54.20	-1.48	2.360	23.60	24.30	-2.88	
A	7/14/2017	Head	D2600V2 SN:1006	9/13/2017	5.930	59.30	55.50	6.85	2.600	26.00	25.00	4.00	
A	7/17/2017	Head	D2300V2 SN:1058	8/18/2017	4.870	48.70	50.50	-3.56	2.270	22.70	24.20	-6.20	5,6
A	7/17/2017	Body	D2300V2 SN:1058	8/18/2017	4.810	48.10	48.50	-0.82	2.290	22.90	23.50	-2.55	
A	7/18/2017	Body	D835V2 SN:4d002	11/8/2017	1.020	10.20	9.55	6.81	0.669	6.69	6.33	5.69	7,8
A	7/18/2017	Body	D2600V2 SN:1006	9/13/2017	5.380	53.80	54.20	-0.74	2.360	23.60	24.30	-2.88	
A	7/18/2017	Head	D2600V2 SN:1006	9/13/2017	6.000	60.00	55.50	8.11	2.600	26.00	25.00	4.00	
A	7/21/2017	Body	D2600V2 SN:1006	9/13/2017	5.440	54.40	54.20	0.37	2.380	23.80	24.30	-2.06	
A	7/21/2017	Head	D2600V2 SN:1006	9/13/2017	6.090	60.90	55.50	9.73	2.650	26.50	25.00	6.00	9,10
B	6/30/2017	Body	D750V3 SN:1019	3/13/2018	0.854	8.54	8.76	-2.51	0.573	5.73	5.80	-1.21	
B	7/1/2017	Head	D750V3 SN:1019	3/13/2018	0.891	8.91	8.22	8.39	0.587	5.87	5.39	8.91	11,12
B	7/7/2017	Body	D1750V2 SN:1050	4/18/2018	3.460	34.60	37.68	-8.17	1.830	18.30	19.92	-8.13	
B	7/9/2017	Head	D1750V2 SN:1077	9/14/2017	3.730	37.30	36.00	3.61	1.970	19.70	19.10	3.14	13,14
B	7/10/2017	Body	D1750V2 SN:1077	9/14/2017	3.660	36.60	36.20	1.10	1.930	19.30	19.30	0.00	
B	7/13/2017	Head	D1750V2 SN:1050	4/18/2018	3.670	36.70	36.76	-0.16	1.940	19.40	19.60	-1.02	
B	7/13/2017	Body	D1750V2 SN:1050	4/18/2018	3.460	34.60	37.68	-8.17	1.820	18.20	19.92	-8.63	15,16
B	7/16/2017	Body	D2450V2 SN:748	2/8/2018	5.160	51.60	51.30	0.58	2.370	23.70	23.90	-0.84	
B	7/17/2017	Head	D2450V2 SN:748	2/8/2018	5.230	52.30	52.10	0.38	2.380	23.80	24.20	-1.65	
B	7/20/2017	Body	D2450V2 SN:748	2/8/2018	5.070	50.70	51.30	-1.17	2.300	23.00	23.90	-3.77	17,18
B	7/21/2017	Head	D2450V2 SN:748	2/8/2018	5.210	52.10	52.10	0.00	2.340	23.40	24.20	-3.31	
C	7/1/2017	Body	D1900V2 SN:5d140	4/19/2018	3.960	39.60	41.20	-3.88	2.040	20.40	21.52	-5.20	
C	7/1/2017	Head	D1900V2 SN:5d140	4/19/2018	4.100	41.00	40.80	0.49	2.090	20.90	21.16	-1.23	
C	7/5/2017	Body	D1900V2 SN:5d140	4/19/2018	3.910	39.10	41.20	-5.10	2.010	20.10	21.52	-6.60	
C	7/5/2017	Head	D1900V2 SN:5d140	4/19/2018	3.840	38.40	40.80	-5.88	1.950	19.50	21.16	-7.84	19,20
C	7/9/2017	Head	D1900V2 SN:5d140	4/19/2018	4.090	40.90	40.80	0.25	2.080	20.80	21.16	-1.70	
C	7/9/2017	Body	D1900V2 SN:5d140	4/19/2018	4.050	40.50	41.20	-1.70	2.080	20.80	21.52	-3.35	
C	7/16/2017	Head	D1900V2 SN:5d140	4/19/2018	3.880	38.80	40.80	-4.90	1.970	19.70	21.16	-6.90	
C	7/16/2017	Body	D1900V2 SN:5d140	4/19/2018	4.040	40.40	41.20	-1.94	2.080	20.80	21.52	-3.35	
C	7/19/2017	Head	D1900V2 SN:5d140	4/19/2018	4.040	40.40	40.80	-0.98	2.060	20.60	21.16	-2.65	
C	7/19/2017	Body	D1900V2 SN:5d140	4/19/2018	4.030	40.30	41.20	-2.18	2.070	20.70	21.52	-3.81	
C	7/23/2017	Head	D1900V2 SN:5d140	4/19/2018	3.930	39.30	40.80	-3.68	2.000	20.00	21.16	-5.48	
C	7/23/2017	Body	D1900V2 SN:5d140	4/19/2018	4.140	41.40	41.20	0.49	2.110	21.10	21.52	-1.95	

SAR Lab	Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Date	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
D	6/29/2017	Head	D835V2 SN:4d002	11/8/2017	0.989	9.89	9.46	4.55	0.651	6.51	6.15	5.85	21,22
D	6/29/2017	Body	D835V2 SN:4d002	11/8/2017	0.982	9.82	9.55	2.83	0.647	6.47	6.33	2.21	
D	7/2/2017	Head	D835V2 SN:4d117	5/22/2018	0.895	8.95	9.43	-5.09	0.590	5.90	6.09	-3.12	23,24
D	7/5/2017	Head	D835V2 SN:4d117	5/22/2018	0.952	9.52	9.43	0.95	0.628	6.28	6.09	3.12	
D	7/6/2017	Head	D2600V2 SN:1006	9/13/2017	5.380	53.80	55.50	-3.06	2.370	23.70	25.00	-5.20	
D	7/8/2017	Head	D835V2 SN:4d002	11/8/2017	0.941	9.41	9.46	-0.53	0.621	6.21	6.15	0.98	
D	7/9/2017	Body	D835V2 SN:4d002	11/8/2017	0.968	9.68	9.55	1.36	0.639	6.39	6.33	0.95	
D	7/9/2017	Head	D2600V2 SN:1006	9/13/2017	5.260	52.60	55.50	-5.23	2.290	22.90	25.00	-8.40	
D	7/10/2017	Body	D2600V2 SN:1006	9/13/2017	5.510	55.10	54.20	1.66	2.420	24.20	24.30	-0.41	
D	7/13/2017	Body	D2600V2 SN:1006	9/13/2017	5.040	50.40	54.20	-7.01	2.230	22.30	24.30	-8.23	25,26
D	7/15/2017	Head	D2600V2 SN:1006	9/13/2017	5.600	56.00	55.50	0.90	2.450	24.50	25.00	-2.00	
D	7/17/2017	Body	D2600V2 SN:1006	9/13/2017	5.520	55.20	54.20	1.85	2.410	24.10	24.30	-0.82	
D	7/20/2017	Body	D2600V2 SN:1006	9/13/2017	5.250	52.50	54.20	-3.14	2.290	22.90	24.30	-5.76	
D	7/21/2017	Head	D2600V2 SN:1006	9/13/2017	5.570	55.70	55.50	0.36	2.440	24.40	25.00	-2.40	
D	7/22/2017	Body	D2450V2 SN:748	2/8/2018	5.320	53.20	51.30	3.70	2.420	24.20	23.90	1.26	27,28
E	7/5/2017	Head	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	7.720	77.20	83.30	-7.32	2.170	21.70	23.80	-8.82	
E	7/5/2017	Body	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	7.750	77.50	78.30	-1.02	2.150	21.50	22.00	-2.27	
E	7/8/2017	Body	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	8.410	84.10	78.30	7.41	2.340	23.40	22.00	6.36	
E	7/8/2017	Head	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	7.790	77.90	83.30	-6.48	2.200	22.00	23.80	-7.56	
E	7/12/2017	Body	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	8.250	82.50	78.30	5.36	2.280	22.80	22.00	3.64	
E	7/12/2017	Head	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	7.850	78.50	83.30	-5.76	2.210	22.10	23.80	-7.14	
E	7/16/2017	Head	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	7.690	76.90	83.30	-7.68	2.160	21.60	23.80	-9.24	
E	7/16/2017	Body	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	8.480	84.80	78.30	8.30	2.340	23.40	22.00	6.36	29,30
E	7/20/2017	Head	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	7.940	79.40	83.30	-4.68	2.240	22.40	23.80	-5.88	
E	7/20/2017	Body	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	7.750	77.50	78.30	-1.02	2.150	21.50	22.00	-2.27	
E	7/24/2017	Head	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	8.690	86.90	83.30	4.32	2.450	24.50	23.80	2.94	
E	7/24/2017	Body	D5GHzV2 SN:1003 (5.6 GHz)	2/13/2018	8.100	81.00	78.30	3.45	2.240	22.40	22.00	1.82	
F	7/5/2017	Body	D2450V2 SN:748	2/8/2018	5.420	54.20	51.30	5.65	2.470	24.70	23.90	3.35	
F	7/5/2017	Head	D2450V2 SN:748	2/8/2018	5.700	57.00	52.10	9.40	2.560	25.60	24.20	5.79	31,32
F	7/8/2017	Body	D2450V2 SN:748	2/8/2018	4.930	49.30	51.30	-3.90	2.280	22.80	23.90	-4.60	
F	7/8/2017	Head	D2450V2 SN:748	2/8/2018	5.590	55.90	52.10	7.29	2.520	25.20	24.20	4.13	
F	7/8/2017	Head	D2600V2 SN:1006	9/13/2017	6.030	60.30	55.50	8.65	2.620	26.20	25.00	4.80	33,34
F	7/8/2017	Body	D2600V2 SN:1006	9/13/2017	5.290	52.90	54.20	-2.40	2.320	23.20	24.30	-4.53	
F	7/12/2017	Head	D2450V2 SN:748	2/8/2018	5.340	53.40	52.10	2.50	2.430	24.30	24.20	0.41	
F	7/12/2017	Body	D2450V2 SN:748	2/8/2018	5.150	51.50	51.30	0.39	2.370	23.70	23.90	-0.84	
F	7/12/2017	Head	D2600V2 SN:1006	9/13/2017	5.810	58.10	55.50	4.68	2.530	25.30	25.00	1.20	
F	7/12/2017	Body	D2600V2 SN:1006	9/13/2017	5.280	52.80	54.20	-2.58	2.310	23.10	24.30	-4.94	
F	7/16/2017	Head	D2450V2 SN:748	2/8/2018	5.340	53.40	52.10	2.50	2.430	24.30	24.20	0.41	
F	7/16/2017	Body	D2450V2 SN:748	2/8/2018	5.080	50.80	51.30	-0.97	2.340	23.40	23.90	-2.09	
F	7/20/2017	Head	D2450V2 SN:748	2/8/2018	5.570	55.70	52.10	6.91	2.520	25.20	24.20	4.13	
F	7/20/2017	Body	D2450V2 SN:748	2/8/2018	5.330	53.30	51.30	3.90	2.460	24.60	23.90	2.93	
F	7/24/2017	Head	D2450V2 SN:748	2/8/2018	5.320	53.20	52.10	2.11	2.390	23.90	24.20	-1.24	
F	7/24/2017	Body	D2450V2 SN:748	2/8/2018	4.930	49.30	51.30	-3.90	2.250	22.50	23.90	-5.86	

SAR Lab	Date	Tissue Type	Dipole Type Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
G	7/8/2017	Body	D5GHzV2 SN:1003 (5.8 GHz)	2/13/2018	7.620	76.20	73.50	3.67	2.100	21.00	20.50	2.44	
G	7/8/2017	Head	D5GHzV2 SN:1003 (5.8 GHz)	2/13/2018	7.370	73.70	78.10	-5.63	2.100	21.00	22.10	-4.98	
G	7/12/2017	Head	D5GHzV2 SN:1003 (5.8 GHz)	2/13/2018	7.320	73.20	78.10	-6.27	2.070	20.70	22.10	-6.33	
G	7/12/2017	Body	D5GHzV2 SN:1003 (5.8 GHz)	2/13/2018	7.170	71.70	73.50	-2.45	1.970	19.70	20.50	-3.90	
G	7/16/2017	Head	D5GHzV2 SN:1003 (5.8 GHz)	2/13/2018	7.290	72.90	78.10	-6.66	2.060	20.60	22.10	-6.79	
G	7/16/2017	Body	D5GHzV2 SN:1003 (5.8 GHz)	2/13/2018	7.500	75.00	73.50	2.04	2.050	20.50	20.50	0.00	
G	7/20/2017	Body	D5GHzV2 SN:1003 (5.8 GHz)	2/13/2018	7.810	78.10	73.50	6.26	2.150	21.50	20.50	4.88	
G	7/20/2017	Head	D5GHzV2 SN:1003 (5.8 GHz)	2/13/2018	7.770	77.70	78.10	-0.51	2.210	22.10	22.10	0.00	
G	7/24/2017	Head	D5GHzV2 SN:1003 (5.8 GHz)	2/13/2018	8.370	83.70	78.10	7.17	2.380	23.80	22.10	7.69	
G	7/24/2017	Body	D5GHzV2 SN:1003 (5.8 GHz)	2/13/2018	7.980	79.80	73.50	8.57	2.220	22.20	20.50	8.29	35,36
H	7/12/2017	Head	D5GHzV2 SN:1003 (5.2 GHz)	2/13/2018	7.210	72.10	76.50	-5.75	2.080	20.80	21.80	-4.59	37,38
H	7/12/2017	Body	D5GHzV2 SN:1003 (5.2 GHz)	2/13/2018	7.390	73.90	70.50	4.82	2.070	20.70	19.80	4.55	
H	7/16/2017	Head	D5GHzV2 SN:1168 (5.2 GHz)	11/14/2017	7.930	79.30	76.80	3.26	2.250	22.50	22.00	2.27	
H	7/17/2017	Body	D5GHzV2 SN:1168 (5.2 GHz)	11/14/2017	7.150	71.50	73.60	-2.85	2.020	20.20	20.50	-1.46	
H	7/20/2017	Head	D5GHzV2 SN:1168 (5.2 GHz)	11/14/2017	8.080	80.80	76.80	5.21	2.330	23.30	22.00	5.91	
H	7/21/2017	Body	D5GHzV2 SN:1168 (5.2 GHz)	11/14/2017	7.340	73.40	73.60	-0.27	2.090	20.90	20.50	1.95	
H	7/24/2017	Head	D5GHzV2 SN:1168 (5.2 GHz)	11/14/2017	7.220	72.20	76.80	-5.99	2.090	20.90	22.00	-5.00	39,40
H	7/25/2017	Body	D5GHzV2 SN:1168 (5.2 GHz)	11/14/2017	7.300	73.00	73.60	-0.82	2.070	20.70	20.50	0.98	

9. Conducted Output Power Measurements

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing. Refer to Sec. 6.3.5 for more information. The selection between antennas UAT and LAT in application is based on RSSI based antenna selection. The full details of power selections are described in the operational description. Refer to Sec. 10 for details of the testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted in detail for each technology in their respective Sections.

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	MODE A				MODE B			
			UAT 1		LAT 1		UAT 1		LAT 1	
			1 slot	2 slots	1 slot	2 slots	1 slot	2 slots	1 slot	2 slots
Burst Power (dBm)										
850	Max Power (dBm)		30.8	29.8	33.3	32.3	30.8	29.8	33.3	32.3
	128	824.2	30.6	29.8	33.1	32.3	30.6	29.8	33.1	32.3
	190	836.6	30.6	29.8	33.1	32.3	30.6	29.8	33.1	32.3
	251	848.8	30.6	29.8	33.1	32.3	30.6	29.8	33.1	32.3
Frame Power (dBm)										
850	Max Power (dBm)		21.8	23.8	24.3	26.3	21.8	23.8	24.3	26.3
	128	824.2	21.6	23.8	24.1	26.3	21.6	23.8	24.1	26.3
	190	836.6	21.6	23.8	24.1	26.3	21.6	23.8	24.1	26.3
	251	848.8	21.6	23.8	24.1	26.3	21.6	23.8	24.1	26.3

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	MODE A				MODE B			
			UAT 1		LAT 1		UAT 1		LAT 1	
			1 slot	2 slots	1 slot	2 slots	1 slot	2 slots	1 slot	2 slots
Burst Power (dBm)										
850	Max Power (dBm)		25.5	24.5	28.0	27.0	25.5	24.5	28.0	27.0
	128.0	824.2	25.5	24.5	28.0	27.0	25.5	24.5	28.0	27.0
	190.0	836.6	25.5	24.5	28.0	27.0	25.5	24.5	28.0	27.0
	251.0	848.8	25.5	24.5	28.0	27.0	25.5	24.5	28.0	27.0
Frame Power (dBm)										
850	Max Power (dBm)		16.5	18.5	19.0	21.0	16.5	18.5	19.0	21.0
	128.0	824.2	16.5	18.5	19.0	21.0	16.5	18.5	19.0	21.0
	190.0	836.6	16.5	18.5	19.0	21.0	16.5	18.5	19.0	21.0
	251.0	848.8	16.5	18.5	19.0	21.0	16.5	18.5	19.0	21.0

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots based on the maximum output power from Tune-up Procedure.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM1900 Measured Results**GPRS (GMSK) - Coding Scheme: CS1**

Band	Ch No.	Freq. (MHz)	MODE A				MODE B			
			UAT 1		LAT 1		UAT 1		LAT 1	
			1 slot	2 slots	1 slot	2 slots	1 slot	2 slots	1 slot	2 slots
Burst Power (dBm)										
1900	Max Power (dBm)		26.0	23.0	31.3	30.3	26.8	23.8	28.0	25.0
	512.0	1850.2	25.0	22.1	30.9	30.0	26.5	23.8	26.7	25.0
	661.0	1880.0	25.0	22.1	30.3	30.0	26.6	23.8	26.8	25.0
	810.0	1909.8	25.0	22.1	30.5	30.1	26.6	23.8	26.7	25.0
Frame Power (dBm)										
1900	Max Power (dBm)		17.0	17.0	22.3	24.3	17.8	17.8	19.0	19.0
	512.0	1850.2	16.0	16.1	21.9	24.0	17.5	17.7	17.7	19.0
	661.0	1880.0	16.0	16.1	21.3	24.0	17.6	17.7	17.8	19.0
	810.0	1909.8	16.0	16.1	21.5	24.1	17.6	17.7	17.7	19.0

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	MODE A				MODE B			
			UAT 1		LAT 1		UAT 1		LAT 1	
			1 slot	2 slots	1 slot	2 slots	1 slot	2 slots	1 slot	2 slots
Burst Power (dBm)										
1900	Max Power (dBm)		24.5	23.0	27.0	26.0	24.5	23.5	27.0	25.0
	512.0	1850.2	24.5	22.0	27.0	26.0	24.5	23.5	26.3	25.0
	661.0	1880.0	24.5	22.0	27.0	26.0	24.5	23.5	26.3	25.0
	810.0	1909.8	24.5	22.0	27.0	26.0	24.5	23.5	26.3	25.0
Frame Power (dBm)										
1900	Max Power (dBm)		15.5	17.0	18.0	20.0	15.5	17.5	18.0	19.0
	512.0	1850.2	15.5	16.0	18.0	20.0	15.5	17.5	17.3	19.0
	661.0	1880.0	15.5	16.0	18.0	20.0	15.5	17.5	17.3	19.0
	810.0	1909.8	15.5	16.0	18.0	20.0	15.5	17.5	17.3	19.0

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots based on the maximum output power from Tune-up Procedure.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

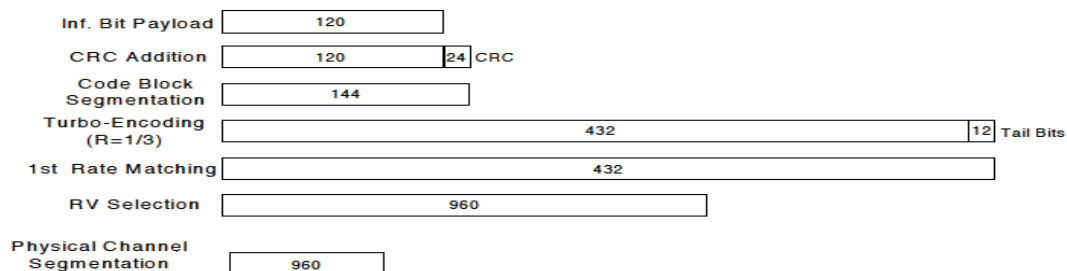**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

HSPA+

The following 1 Sub-test was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

W-CDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Avg Pwr (dBm)				
						MODE A		MODE B		
						UAT 1	LAT 1	UAT 1	LAT 1	
W-CDMA Band V	Rel 99	Max Power (dBm)				23.8	24.8	23.8	24.8	
		RMC, 12.2 kbps	4132	826.4	N/A	23.8	24.8	23.8	24.8	
			4183	836.6	N/A	23.8	24.8	23.8	24.8	
			4233	846.6	N/A	23.8	24.8	23.8	24.8	
	HSDPA	Max Power (dBm)				23.8	24.8	23.8	24.8	
		Subtest 1	4132	826.4	0	23.8	24.8	23.8	24.8	
			4183	836.6	0	23.8	24.8	23.8	24.8	
			4233	846.6	0	23.8	24.8	23.8	24.8	
		Subtest 2	4132	826.4	0	23.8	24.8	23.8	24.8	
			4183	836.6	0	23.8	24.7	23.8	24.7	
			4233	846.6	0	23.7	24.8	23.7	24.8	
		Subtest 3	4132	826.4	0.5	23.2	23.2	23.2	23.2	
			4183	836.6	0.5	23.3	23.2	23.3	23.2	
			4233	846.6	0.5	23.2	24.3	23.2	24.3	
		Subtest 4	4132	826.4	0.5	23.3	23.1	23.3	23.1	
			4183	836.6	0.5	23.3	24.3	23.3	24.3	
			4233	846.6	0.5	23.3	24.3	23.3	24.3	
		HSUPA	Max Power (dBm)				23.8	24.8	23.8	24.8
			Subtest 1	4132	826.4	0	23.8	24.8	23.8	24.8
				4183	836.6	0	23.8	24.8	23.8	24.8
	4233			846.6	0	23.7	24.8	23.7	24.8	
	Subtest 2		4132	826.4	2	21.7	22.2	21.7	22.2	
			4183	836.6	2	21.8	22.2	21.8	22.2	
			4233	846.6	2	21.8	22.2	21.8	22.2	
	Subtest 3		4132	826.4	1	22.6	23.2	22.6	23.2	
			4183	836.6	1	22.8	23.2	22.8	23.2	
			4233	846.6	1	22.8	23.3	22.8	23.3	
	Subtest 4		4132	826.4	2	21.8	22.3	21.8	22.3	
			4183	836.6	2	21.8	22.3	21.8	22.3	
			4233	846.6	2	21.8	22.3	21.8	22.3	
	Subtest 5		4132	826.4	0	23.7	24.8	23.7	24.8	
			4183	836.6	0	23.8	24.8	23.8	24.8	
			4233	846.6	0	23.8	24.8	23.8	24.8	
	DC-HSDPA	Max Power (dBm)				23.8	24.8	23.8	24.8	
		Subtest 1	4132	826.4	0	23.8	24.7	23.8	24.7	
			4183	836.6	0	23.7	24.7	23.7	24.7	
			4233	846.6	0	23.8	24.8	23.8	24.8	
		Subtest 2	4132	826.4	0	23.7	24.8	23.7	24.8	
			4183	836.6	0	23.7	24.8	23.7	24.8	
			4233	846.6	0	23.8	24.7	23.8	24.7	
		Subtest 3	4132	826.4	0.5	23.3	24.3	23.3	24.3	
			4183	836.6	0.5	23.2	24.3	23.2	24.3	
			4233	846.6	0.5	23.3	24.2	23.3	24.2	
		Subtest 4	4132	826.4	0.5	23.3	24.2	23.3	24.2	
			4183	836.6	0.5	23.3	24.3	23.3	24.3	
	4233		846.6	0.5	23.3	24.3	23.3	24.3		
	HSPA+	Max Power (dBm)				23.8	24.8	23.8	24.8	
		Subtest 1	4132	826.4	2.5	21.4	22.3	21.4	22.3	
			4183	836.6	2.5	21.5	22.3	21.5	22.3	
			4233	846.6	2.5	21.4	22.4	21.4	22.4	

W-CDMA Band IV Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Avg Pwr (dBm)				
						MODE A		MODE B		
						UAT 1	LAT 1	UAT 1	LAT 1	
W-CDMA Band IV	Rel 99	Max Power (dBm)				18.0	25.3	18.8	20.3	
		RMC, 12.2 kbps	1312	1712.4	N/A	17.5	25.3	18.5	20.0	
			1413	1732.6	N/A	17.6	25.3	18.5	20.0	
			1513	1752.6	N/A	17.5	25.3	18.5	20.0	
	HSDPA	Max Power (dBm)				18.0	25.3	18.8	20.3	
		Subtest 1	1312	1712.4	0	17.5	25.3	18.5	20.0	
			1413	1732.6	0	17.5	25.3	18.5	20.0	
			1513	1752.6	0	17.5	25.2	18.5	19.8	
		Subtest 2	1312	1712.4	0	17.5	25.2	18.4	19.8	
			1413	1732.6	0	17.5	25.3	18.4	20.0	
			1513	1752.6	0	17.4	25.2	18.4	20.0	
		Subtest 3	1312	1712.4	0.5	16.9	24.8	17.9	19.5	
			1413	1732.6	0.5	17.0	24.8	17.9	19.5	
			1513	1752.6	0.5	17.0	24.8	17.9	19.5	
		Subtest 4	1312	1712.4	0.5	17.0	24.7	18.0	19.3	
			1413	1732.6	0.5	16.9	24.6	18.0	19.3	
			1513	1752.6	0.5	16.8	24.6	18.0	19.5	
		HSUPA	Max Power (dBm)				18.0	25.3	18.8	20.3
			Subtest 1	1312	1712.4	0	17.5	25.2	18.4	20.0
				1413	1732.6	0	17.4	25.2	18.4	19.9
	1513			1752.6	0	17.4	25.2	18.3	19.8	
	Subtest 2		1312	1712.4	2	15.4	23.3	16.5	18.0	
			1413	1732.6	2	15.4	23.3	16.5	18.0	
			1513	1752.6	2	15.4	23.3	16.4	18.0	
	Subtest 3		1312	1712.4	1	16.4	24.2	17.4	18.9	
			1413	1732.6	1	16.5	24.3	17.4	18.9	
			1513	1752.6	1	16.5	24.3	17.5	18.7	
	Subtest 4		1312	1712.4	2	15.5	23.3	16.3	17.9	
			1413	1732.6	2	15.4	23.0	16.4	17.8	
			1513	1752.6	2	15.4	23.2	16.4	17.8	
	Subtest 5		1312	1712.4	0	17.4	25.3	18.3	20.0	
			1413	1732.6	0	17.4	25.2	18.5	19.9	
			1513	1752.6	0	17.4	25.2	18.4	19.9	
	DC-HSDPA	Max Power (dBm)				18.0	25.3	18.8	20.3	
		Subtest 1	1312	1712.4	0	17.4	25.2	18.4	19.9	
			1413	1732.6	0	17.5	25.1	18.5	19.9	
			1513	1752.6	0	17.4	25.3	18.4	20.0	
		Subtest 2	1312	1712.4	0	17.4	25.2	18.4	19.9	
			1413	1732.6	0	17.4	25.2	18.4	19.9	
			1513	1752.6	0	17.3	25.3	18.5	19.8	
		Subtest 3	1312	1712.4	0.5	17.0	24.6	17.9	19.5	
			1413	1732.6	0.5	16.9	24.8	17.9	19.4	
			1513	1752.6	0.5	16.9	24.7	17.8	19.4	
		Subtest 4	1312	1712.4	0.5	16.8	24.7	18.0	19.5	
			1413	1732.6	0.5	16.8	24.6	17.9	19.4	
			1513	1752.6	0.5	16.9	24.6	17.9	19.4	
	HSPA+	Max Power (dBm)				18.0	25.3	18.8	20.3	
		Subtest 1	1312	1712.4	2.5	15.5	22.8	18.5	17.8	
			1413	1732.6	2.5	15.5	22.8	18.6	17.8	
			1513	1752.6	2.5	15.6	22.8	18.6	17.8	

W-CDMA Band II Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Avg Pwr (dBm)			
						MODE A		MODE B	
						UAT 1	LAT 1	UAT 1	LAT 1
W-CDMA Band II	Rel 99	Max Power (dBm)				17.5	25.0	19.3	19.8
		RMC, 12.2 kbps	9262	1852.4	N/A	17.1	24.7	18.1	18.8
			9400	1880.0	N/A	17.2	24.8	18.2	18.9
			9538	1907.6	N/A	17.2	24.8	18.3	19.0
	HSDPA	Max Power (dBm)				17.5	25.0	19.3	19.8
		Subtest 1	9262	1852.4	0	17.2	24.8	18.3	18.8
			9400	1880.0	0	17.3	24.8	18.3	18.9
			9538	1907.6	0	17.1	24.7	18.2	19.0
		Subtest 2	9262	1852.4	0	17.1	24.7	18.2	19.0
			9400	1880.0	0	17.1	24.7	18.1	18.8
			9538	1907.6	0	17.1	24.8	18.3	19.0
		Subtest 3	9262	1852.4	0.5	16.8	24.3	17.6	18.5
			9400	1880.0	0.5	16.6	24.3	17.6	18.4
			9538	1907.6	0.5	16.7	24.2	17.8	18.4
		Subtest 4	9262	1852.4	0.5	16.8	24.2	17.7	18.5
			9400	1880.0	0.5	16.8	24.3	17.7	18.4
			9538	1907.6	0.5	16.7	24.2	17.6	18.4
	HSUPA	Max Power (dBm)				17.5	25.0	19.3	19.8
		Subtest 1	9262	1852.4	0	17.2	24.8	18.2	19.0
			9400	1880.0	0	17.3	24.8	18.3	18.8
			9538	1907.6	0	17.1	24.6	18.2	19.0
		Subtest 2	9262	1852.4	2	15.3	22.8	16.1	17.0
			9400	1880.0	2	15.2	22.7	16.1	16.9
			9538	1907.6	2	15.2	22.7	16.2	16.9
		Subtest 3	9262	1852.4	1	16.3	23.7	17.2	18.0
			9400	1880.0	1	16.3	23.6	17.2	18.0
			9538	1907.6	1	16.3	23.7	17.3	17.9
		Subtest 4	9262	1852.4	2	15.2	22.7	16.2	16.9
			9400	1880.0	2	15.2	22.7	16.2	16.9
			9538	1907.6	2	15.2	22.7	16.2	16.8
		Subtest 5	9262	1852.4	0	17.2	24.6	18.3	18.9
			9400	1880.0	0	17.3	24.7	18.2	19.0
			9538	1907.6	0	17.3	24.7	18.3	19.0
	DC-HSDPA	Max Power (dBm)				17.5	25.0	19.3	19.8
		Subtest 1	9262	1852.4	0	17.1	24.8	18.2	18.9
			9400	1880.0	0	17.2	24.8	18.2	18.9
			9538	1907.6	0	17.2	24.7	18.2	19.0
		Subtest 2	9262	1852.4	0	17.1	24.7	18.1	19.0
			9400	1880.0	0	17.1	24.7	18.3	18.9
			9538	1907.6	0	17.2	24.6	18.1	19.0
		Subtest 3	9262	1852.4	0.5	16.7	24.1	17.8	18.5
			9400	1880.0	0.5	16.7	24.2	17.7	18.3
			9538	1907.6	0.5	16.8	24.3	17.7	18.5
		Subtest 4	9262	1852.4	0.5	16.7	24.2	17.7	18.4
			9400	1880.0	0.5	16.8	24.2	17.6	18.4
			9538	1907.6	0.5	16.7	24.2	17.7	18.4
	HSPA+	Max Power (dBm)				17.5	25.0	19.3	19.8
		Subtest 1	9262	1852.4	2.5	15.0	22.5	16.7	17.3
			9400	1880.0	2.5	15.0	22.4	16.8	17.3
			9538	1907.6	2.5	15.0	22.4	16.8	17.3

9.3. CDMA

1x Advanced Setup Procedures used to establish the test signals

Call box setup procedure

- Protocol Rev > 6 (IS-2000-0)
- System ID: 331; NID: 65535, Reg. Ch. #.:
- Radio Config (RC) > Fwd11,Rvs8
- Service Option (SO) Setup > SO75 (Loopback)
- Traffic Data Rate > Full
- Rvs Power Ctrl > All Up bits (Maximum TxPout)
- Reverse Power Control Mode: 00-200 to 400 bps
- Smart blanking was disabled.

CDMA BC0 Measured Results

CDMA EVDO Measured Results								
Band	Mode		Ch No.	Freq. (MHz)	Avg Pwr (dBm)			
					MODE A		MODE B	
					UAT 1	LAT 1	UAT 1	LAT 1
BC 0	Max Power (dBm)				23.3	24.8	23.3	24.8
	1xRTT	RC1 SO55 (Loopback)	1013	824.70	23.3	24.8	23.3	24.8
			384	836.52	23.3	24.8	23.3	24.8
			777	848.31	23.3	24.8	23.3	24.8
		RC3 SO55 (Loopback)	1013	824.70	23.2	24.8	23.2	24.8
			384	836.52	23.2	24.8	23.2	24.8
			777	848.31	23.2	24.8	23.2	24.8
		RC3 SO32 (+F-SCH)	1013	824.70	23.2	24.8	23.2	24.8
			384	836.52	23.2	24.8	23.2	24.8
			777	848.31	23.2	24.8	23.2	24.8
	Max Power (dBm)				23.3	24.8	23.3	24.8
	1xAdvanced	Fwd11/Rvs8 SO75 (Loopback)	1013	824.70	23.2	24.8	23.2	24.8
			384	836.52	23.2	24.8	23.2	24.8
			777	848.31	23.2	24.8	23.2	24.8
	Max Power (dBm)				23.3	24.8	23.3	24.8
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	1013	824.70	23.3	24.8	23.3	24.8
			384	836.52	23.3	24.8	23.3	24.8
			777	848.31	23.3	24.8	23.3	24.8
	Max Power (dBm)				23.3	24.8	23.3	24.8
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	1013	824.70	23.2	24.8	23.2	24.8
			384	836.52	23.2	24.8	23.2	24.8
			777	848.31	23.2	24.8	23.2	24.8

CDMA BC1 Measured Results

Band	Mode		Ch No.	Freq. (MHz)	Avg Pwr (dBm)			
					MODE A		MODE B	
					UAT 1	LAT 1	UAT 1	LAT 1
BC 1	Max Power (dBm)				17.5	25	19.3	19.8
	1xRTT	RC1 SO55 (Loopback)	25	1851.25	17.3	24.8	18.1	19.0
			600	1880.00	17.3	24.8	18.1	19.1
			1175	1908.75	17.3	24.8	18.1	19.3
		RC3 SO55 (Loopback)	25	1851.25	17.3	24.8	18.1	19.0
			600	1880.00	17.3	24.8	18.1	19.1
			1175	1908.75	17.3	24.8	18.1	19.3
		RC3 SO32 (+F-SCH)	25	1851.25	17.3	24.8	18.1	19.0
			600	1880.00	17.3	24.8	18.1	19.1
			1175	1908.75	17.3	24.8	18.1	19.3
	Max Power (dBm)				17.5	25	19.3	19.8
	1xAdvanced	Fwd11/Rvs8 SO75 (Loopback)	25	1851.25	17.3	24.8	18.1	19.0
			600	1880	17.3	24.8	18.1	19.0
			1175	1908.75	17.3	24.8	18.1	19.0
	Max Power (dBm)				17.5	25	19.3	19.8
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	25	1851.25	17.5	24.8	18.1	19.0
			600	1880	17.5	24.8	18.1	19.0
			1175	1908.75	17.5	24.8	18.1	19.0
	Max Power (dBm)				17.5	25	19.3	19.8
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	25	1851.25	17.3	24.8	18.1	19.0
			600	1880	17.3	24.8	18.1	19.0
			1175	1908.75	17.3	24.8	18.1	19.0

CDMA BC10 Measured Results

Band	Mode		Ch No.	Freq. (MHz)	Avg Pwr (dBm)			
					MODE A		MODE B	
					UAT 1	LAT 1	UAT 1	LAT 1
BC 10	Max Power (dBm)				23.3	24.8	23.3	24.8
	1xRTT	RC1 SO55 (Loopback)	450	817.25	23.3	24.8	23.2	24.8
			560	820.00	23.3	24.8	23.2	24.8
			670	822.75	23.3	24.8	23.2	24.8
		RC3 SO55 (Loopback)	450	817.25	23.2	24.8	23.2	24.8
			560	820.00	23.2	24.8	23.2	24.8
			670	822.75	23.2	24.8	23.2	24.8
		RC3 SO32 (+F-SCH)	450	817.25	23.2	24.8	23.3	24.8
			560	820.00	23.2	24.8	23.3	24.8
			670	822.75	23.2	24.8	23.3	24.8
	Max Power (dBm)				23.3	24.8	23.3	24.8
	1xAdvanced	Fwd11/Rvs8 SO75 (Loopback)	450	817.25	23.2	24.8	23.2	24.8
			560	820.00	23.2	24.8	23.2	24.8
			670	822.75	23.2	24.8	23.2	24.8
	Max Power (dBm)				23.3	24.8	23.3	24.8
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	450	817.25	23.3	24.8	23.2	24.8
			560	820.00	23.3	24.8	23.2	24.8
			670	822.75	23.3	24.8	23.2	24.8
	Max Power (dBm)				23.3	24.8	23.3	24.8
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	450	817.25	23.2	24.8	23.2	24.8
			560	820.00	23.2	24.8	23.2	24.8
			670	822.75	23.2	24.8	23.2	24.8

9.4. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50 (NOTE 1)	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
		65 (NOTE 3)	10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1, 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9, Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2, 6.6.2.2.1, 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
	6.6.3.3.15				
NS_21	6.6.2.2.1, 6.6.3.3.16	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-
NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for					
operations below this frequency is not covered in this version of specifications except for the channel assignments in NOTE2 as the emissions requirement in 6.6.3.3.1 may not be met. For 10MHz channel bandwidth whose carrier frequency is larger than or equal to 1945 MHz or 15 MHz channel bandwidth whose carrier frequency is larger than or equal to 1947.5 MHz, no A-MPR applies.					
NOTE 2: Applicable when carrier frequency is 1932.5 MHz for 15MHz channel bandwidth or 1930 MHz for 20MHz channel bandwidth case.					
NOTE 3: Applicable when the E-UTRA carrier is within 1920-1980 MHz.					
NOTE 4: Applicable when the upper edge of the channel bandwidth frequency is greater than 1980MHz.					
NOTE 5: Applicable only for an LAA SCell configured in Band 46.					

LTE Band 2 Average Power (dBm) Measured Results

LAT Head was not considered for test exclusion due to higher power than LTE Band 25.

Other exposure conditions on LTE Band 2 (Frequency range: 1850 - 1910 MHz) are covered by LTE Band 25 (Frequency range: 1850 - 1915 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B											
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1						
						1860 MHz	1880 MHz	1900 MHz		1860 MHz	1880 MHz	1900 MHz		1860 MHz	1880 MHz	1900 MHz		1860 MHz	1880 MHz	1900 MHz				
LTE Band 2	20	Max Power (dBm)			24.8																			
		QPSK	1	0																				
			1	49																	0	24.7	24.7	24.7
			1	99																	0	24.7	24.7	24.7
			50	0																	1	23.7	23.7	23.7
			50	24																	1	23.7	23.7	23.8
			50	49																	1	23.7	23.7	23.8
		16QAM	100	0																	1	23.7	23.7	23.7
			1	0																	1	23.7	23.8	23.7
			1	49																	1	23.7	23.6	23.8
			1	99																	1	23.7	23.6	23.8
			50	0																	2	22.6	22.8	22.6
			50	24																	2	22.7	22.7	22.8
		64QAM	50	49																	2	22.6	22.7	22.7
			100	0																	2	22.8	22.6	22.7
			1	0																	2	22.7	22.8	22.6
			1	49																	2	22.6	22.7	22.6
			1	99																	2	22.7	22.7	22.7
			50	0																	3	21.8	21.6	21.7
			50	24																	3	21.7	21.8	21.6
50	49		3	21.6																	21.7	21.6		
100	0	3	21.7	21.7	21.7																			
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B											
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1						
						1857.5 MHz	1880 MHz	1902.5 MHz		1857.5 MHz	1880 MHz	1902.5 MHz		1857.5 MHz	1880 MHz	1902.5 MHz		1857.5 MHz	1880 MHz	1902.5 MHz				
LTE Band 2	15	QPSK	1	0																				
			1	36																0	24.6	24.8	24.7	
			1	74																0	24.7	24.8	24.7	
			36	0																1	23.7	23.7	23.6	
			36	18																1	23.6	23.8	23.6	
			36	37																1	23.7	23.7	23.8	
		16QAM	75	0																1	23.6	23.7	23.7	
			1	0																1	23.8	23.6	23.7	
			1	36																1	23.7	23.8	23.6	
			1	74																1	23.6	23.7	23.6	
			36	0																2	22.7	22.8	22.7	
			36	18																2	22.8	22.7	22.7	
		64QAM	36	37																2	22.7	22.7	22.6	
			75	0																2	22.7	22.7	22.7	
			1	0																2	22.6	22.8	22.7	
			1	36																2	22.6	22.7	22.7	
			1	74																2	22.8	22.7	22.6	
			36	0																3	21.7	21.8	21.7	
			36	18																3	21.8	21.7	21.7	
			36	37																3	21.7	21.7	21.6	
75	0	3	21.7	21.7	21.7																			

LTE Band 2 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						1855 MHz	1880 MHz	1905 MHz		1855 MHz	1880 MHz	1905 MHz		1855 MHz	1880 MHz	1905 MHz		1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0					0	24.7	24.6	24.8								
			1	24					0	24.7	24.8	24.8								
			1	49					0	24.6	24.8	24.7								
			25	0					1	23.7	23.7	23.7								
			25	12					1	23.7	23.8	23.7								
			25	24					1	23.8	23.7	23.7								
			50	0					1	23.7	23.7	23.6								
		16QAM	1	0					1	23.7	23.7	23.7								
			1	24					1	23.6	23.8	23.7								
			1	49					1	23.6	23.7	23.7								
			25	0					2	22.7	22.8	22.7								
			25	12					2	22.7	22.7	22.6								
			25	24					2	22.7	22.7	22.8								
			50	0					2	22.8	22.8	22.7								
		64QAM	1	0					2	22.7	22.7	22.7								
			1	24					2	22.7	22.6	22.8								
			1	49					2	22.8	22.7	22.7								
			25	0					3	21.6	21.8	21.7								
			25	12					3	21.6	21.7	21.7								
			25	24					3	21.8	21.7	21.6								
			50	0					3	21.7	21.6	21.6								
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1							
	1852.5 MHz	1880 MHz	1907.5 MHz		1852.5 MHz	1880 MHz	1907.5 MHz		1852.5 MHz	1880 MHz	1907.5 MHz		1852.5 MHz	1880 MHz	1907.5 MHz					
LTE Band 2	5	QPSK	1	0					0	24.7	24.7	24.8								
			1	12					0	24.6	24.7	24.7								
			1	24					0	24.8	24.6	24.7								
			12	0					1	23.8	23.7	23.6								
			12	7					1	23.7	23.6	23.6								
			12	13					1	23.8	23.8	23.6								
			25	0					1	23.7	23.8	23.6								
		16QAM	1	0					1	23.7	23.7	23.7								
			1	12					1	23.7	23.6	23.7								
			1	24					1	23.6	23.7	23.6								
			12	0					2	22.7	22.7	22.6								
			12	7					2	22.7	22.7	22.7								
			12	13					2	22.7	22.8	22.8								
			25	0					2	22.7	22.8	22.8								
		64QAM	1	0					2	22.8	22.7	22.6								
			1	12					2	22.7	22.8	22.7								
			1	24					2	22.7	22.8	22.7								
			12	0					3	21.6	21.7	21.7								
			12	7					3	21.7	21.6	21.7								
			12	13					3	21.7	21.8	21.8								
			25	0					3	21.8	21.6	21.6								

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						1851.5 MHz	1880 MHz	1908.5 MHz		1851.5 MHz	1880 MHz	1908.5 MHz		1851.5 MHz	1880 MHz	1908.5 MHz		1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0					0	24.7	24.7	24.7								
			1	8					0	24.7	24.8	24.7								
			1	14					0	24.8	24.7	24.7								
			8	0					1	23.7	23.8	23.7								
			8	4					1	23.7	23.7	23.6								
			8	7					1	23.7	23.7	23.8								
			15	0					1	23.8	23.8	23.7								
		16QAM	1	0					1	23.7	23.7	23.7								
			1	8					1	23.7	23.6	23.8								
			1	14					1	23.8	23.7	23.7								
			8	0					2	22.7	22.7	22.6								
			8	4					2	22.6	22.6	22.8								
			8	7					2	22.6	22.8	22.6								
			15	0					2	22.6	22.7	22.7								
		64QAM	1	0					2	22.7	22.8	22.7								
			1	8					2	22.6	22.6	22.6								
			1	14					2	22.7	22.6	22.7								
			8	0					3	21.6	21.8	21.6								
			8	4					3	21.6	21.7	21.6								
			8	7					3	21.6	21.7	21.7								
			15	0					3	21.7	21.8	21.6								
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A								MODE B							
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						1850.7 MHz	1880 MHz	1909.3 MHz		1850.7 MHz	1880 MHz	1909.3 MHz		1850.7 MHz	1880 MHz	1909.3 MHz		1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0					0	24.7	24.7	24.7								
			1	3					0	24.6	24.8	24.7								
			1	5					0	24.6	24.7	24.7								
			3	0					0	24.8	24.7	24.6								
			3	1					0	24.7	24.6	24.6								
			3	3					0	24.8	24.8	24.6								
			6	0					1	23.7	23.7	23.6								
		16QAM	1	0					1	23.7	23.7	23.7								
			1	3					1	23.7	23.8	23.8								
			1	5					1	23.7	23.8	23.8								
			3	0					1	23.8	23.7	23.6								
			3	1					1	23.7	23.8	23.7								
			3	3					1	23.7	23.8	23.7								
			6	0					2	22.6	22.8	22.7								
		64QAM	1	0					2	22.8	22.7	22.6								
			1	3					2	22.7	22.7	22.7								
			1	5					2	22.6	22.6	22.7								
			3	0					2	22.8	22.8	22.7								
			3	1					2	22.6	22.7	22.7								
			3	3					2	22.8	22.6	22.8								
			6	0					3	21.6	21.8	21.7								

LTE Band 4 Average Power (dBm) Measured Results

SAR for LTE Band 4 (Frequency range: 1710 - 1755 MHz) is covered by LTE Band 66 (Frequency range: 1710 - 1780 MHz) due to overlapping frequency range, same maximum tune-up limit and channel bandwidths from 20MHz to 5MHz. Therefore, LTE Band 4 at 3MHz and 1.4MHz bandwidths have been measured.

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A						MODE B												
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1					
						1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz			
LTE Band 4	3	Max Power (dBm)			18.0			24.8			18.8			20.3									
		QPSK	1	0	0.0	17.9	17.9	17.9	0	24.6	24.6	24.6	0	18.8	18.8	18.8	0	20.2	20.3	20.2			
			1	8	0.0	18.0	18.0	18.0	0	24.8	24.8	24.8	0	18.8	18.8	18.8	0	20.3	20.2	20.2			
			1	14	0.0	18.0	18.0	18.0	0	24.5	24.5	24.5	0	18.8	18.8	18.8	0	20.2	20.2	20.3			
			8	0	0.0	17.9	17.9	17.9	1	23.6	23.6	23.6	0	18.8	18.8	18.8	0	20.3	20.3	20.2			
			8	4	0.0	18.0	18.0	18.0	1	23.8	23.8	23.8	0	18.8	18.8	18.8	0	20.2	20.2	20.3			
			8	7	0.0	18.0	18.0	18.0	1	23.7	23.7	23.7	0	18.8	18.8	18.8	0	20.2	20.3	20.2			
		16QAM	15	0	0.0	17.9	17.9	17.9	1	23.7	23.8	23.7	0	18.8	18.8	18.8	0	20.2	20.3	20.2			
			1	0	0.0	18.0	18.0	18.0	1	23.7	23.8	23.6	0	18.8	18.8	18.8	0	20.3	20.3	20.2			
			1	8	0.0	18.0	18.0	18.0	1	23.7	23.8	23.6	0	18.8	18.8	18.8	0	20.3	20.2	20.3			
			1	14	0.0	17.9	17.9	17.9	1	23.7	23.8	23.7	0	18.8	18.8	18.8	0	20.2	20.3	20.2			
			8	0	0.0	17.9	17.9	17.9	2	22.6	22.8	22.8	0	18.7	18.7	18.7	0	20.2	20.2	20.3			
			8	4	0.0	18.0	18.0	18.0	2	22.6	22.8	22.7	0	18.7	18.7	18.6	0	20.3	20.2	20.2			
		64QAM	8	7	0.0	18.0	18.0	18.0	2	22.6	22.8	22.8	0	18.7	18.6	18.7	0	20.3	20.3	20.2			
			15	0	0.0	18.0	18.0	18.0	2	22.8	22.8	22.7	0	18.7	18.7	18.7	0	20.3	20.3	20.2			
			1	0	0.0	17.9	17.9	17.9	2	22.7	22.8	22.7	0	18.6	18.7	18.7	0	20.2	20.3	20.2			
			1	8	0.0	17.9	17.9	17.9	2	22.7	22.8	22.7	0	18.7	18.7	18.6	0	20.3	20.3	20.3			
			1	14	0.0	17.9	17.9	17.9	2	22.7	22.8	22.8	0	18.7	18.7	18.7	0	20.3	20.3	20.3			
			8	0	0.3	17.6	17.7	17.7	3	21.6	21.7	21.6	1	17.6	17.7	17.7	0	20.2	20.3	20.3			
		LTE Band 4	1.4	QPSK	8	4	0.3	17.6	17.7	17.7	3	21.6	21.6	21.6	1	17.7	17.7	17.6	0	20.3	20.2	20.3	
					8	7	0.3	17.7	17.7	17.7	3	21.7	21.7	21.7	1	17.7	17.6	17.7	0	20.2	20.3	20.2	
					16QAM	15	0	0.3	17.7	17.7	17.7	3	21.7	21.7	21.6	1	17.7	17.7	17.7	0	20.2	20.2	20.3
						1	0	0.0	17.9	17.9	17.9	0	24.6	24.6	24.6	0	18.8	18.8	18.8	0	20.3	20.3	20.2
						1	2	0.0	18.0	18.0	18.0	0	24.8	24.8	24.8	0	18.8	18.8	18.8	0	20.3	20.2	20.3
						1	5	0.0	18.0	18.0	18.0	0	24.5	24.5	24.5	0	18.8	18.8	18.8	0	20.2	20.3	20.2
64QAM	3			0		0.0	17.9	17.9	17.9	0	23.6	23.6	23.6	0	18.8	18.8	18.8	0	20.2	20.2	20.3		
	3			1		0.0	18.0	18.0	18.0	0	23.8	23.8	23.8	0	18.8	18.8	18.8	0	20.3	20.2	20.2		
	3			2	0.0	18.0	18.0	18.0	0	23.7	23.7	23.7	0	18.8	18.8	18.8	0	20.3	20.3	20.2			
	6			0	0.0	17.9	17.9	17.9	1	23.7	23.8	23.7	0	18.8	18.8	18.8	0	20.3	20.3	20.2			
	1			0	0.0	18.0	18.0	18.0	1	23.7	23.8	23.7	0	18.8	18.8	18.8	0	20.2	20.3	20.2			
	1			2	0.0	18.0	18.0	18.0	1	23.7	23.8	23.6	0	18.8	18.8	18.8	0	20.3	20.3	20.3			
64QAM	1			5	0.0	17.9	17.9	17.9	1	23.7	23.8	23.7	0	18.8	18.8	18.8	0	20.3	20.3	20.3			
	3			0	0.0	17.9	17.9	17.9	1	22.6	22.8	22.8	0	18.7	18.7	18.7	0	20.2	20.3	20.3			
	3			1	0.0	18.0	18.0	18.0	1	22.6	22.8	22.8	0	18.7	18.7	18.6	0	20.2	20.3	20.3			
	3			2	0.0	18.0	18.0	18.0	1	22.6	22.8	22.8	0	18.6	18.7	18.7	0	20.2	20.3	20.2			
	6			0	0.0	18.0	18.0	18.0	2	22.7	22.8	22.8	0	18.7	18.7	18.7	0	20.3	20.3	20.2			
	1			0	0.0	17.9	17.9	17.9	2	22.7	22.8	22.7	0	18.7	18.6	18.6	0	20.3	20.2	20.3			
	1			2	0.0	17.9	17.9	17.9	2	22.7	22.8	22.7	0	18.6	18.7	18.7	0	20.3	20.3	20.2			
	1			5	0.0	17.9	17.9	17.9	2	22.7	22.8	22.7	0	18.7	18.7	18.7	0	20.2	20.3	20.3			
	3			0	0.3	17.6	17.6	17.6	2	21.6	21.6	21.6	1	17.7	17.7	17.6	0	20.2	20.2	20.3			
	3			1	0.3	17.7	17.7	17.6	2	21.7	21.6	21.7	1	17.6	17.6	17.7	0	20.3	20.2	20.3			
	3			2	0.3	17.7	17.7	17.7	2	21.6	21.7	21.6	1	17.7	17.7	17.7	0	20.2	20.3	20.2			
	6			0	0.3	17.7	17.7	17.7	3	21.6	21.7	21.7	1	17.7	17.6	17.7	0	20.2	20.2	20.3			

LTE Band 5 Average Power (dBm) Measured Results

SAR for LTE Band 5 (Frequency range: 824 - 849 MHz) is covered by LTE Band 26 (Frequency range: 814 – 849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 7 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A							MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						2510 MHz	2535 MHz	2560 MHz		2510 MHz	2535 MHz	2560 MHz		2510 MHz	2535 MHz	2560 MHz		2510 MHz	2535 MHz	2560 MHz
LTE Band 7	Max Power (dBm)					15.3				24.5				18.5				18.0		
	20	QPSK	1	0	0.0	15.0	15.0	15.0	0.0	24.3	24.5	24.4	0.0	17.5	17.4	17.4	0.0	17.5	17.5	17.5
			1	49	0.0	15.0	15.0	15.0	0.0	24.3	24.5	24.5	0.0	17.5	17.5	17.5	0.0	17.5	17.5	17.5
			1	99	0.0	15.0	15.0	15.0	0.0	24.3	24.4	24.4	0.0	17.5	17.5	17.5	0.0	17.5	17.5	17.5
			50	0	0.0	15.0	15.1	15.0	0.2	24.3	24.3	24.3	0.0	17.5	17.4	17.5	0.0	17.5	17.5	17.5
			50	24	0.0	15.0	15.0	15.0	0.2	24.3	24.3	24.3	0.0	17.5	17.5	17.5	0.0	17.5	17.5	17.5
			50	49	0.0	15.0	15.1	15.2	0.2	24.2	24.3	24.2	0.0	17.5	17.5	17.5	0.0	17.4	17.4	17.5
		100	0	0.0	15.0	15.0	15.0	0.2	24.3	24.3	24.3	0.0	17.5	17.5	17.5	0.0	17.5	17.5	17.5	
		16QAM	1	0	0.0	15.2	15.2	15.2	0.2	24.2	24.3	24.3	0.0	17.5	17.4	17.3	0.0	17.5	17.7	17.6
			1	49	0.0	15.2	15.1	15.2	0.2	24.3	24.3	24.3	0.0	17.3	17.5	17.4	0.0	17.6	17.7	17.6
			1	99	0.0	15.2	15.3	15.2	0.2	24.2	24.3	24.2	0.0	17.4	17.4	17.4	0.0	17.6	17.7	17.6
			50	0	0.0	15.1	15.2	15.2	1.2	23.3	23.3	23.2	0.0	17.3	17.5	17.5	0.0	17.6	17.5	17.7
			50	24	0.0	15.1	15.2	15.2	1.2	23.2	23.3	23.2	0.0	17.5	17.4	17.4	0.0	17.6	17.5	17.7
			50	49	0.0	15.2	15.3	15.2	1.2	23.2	23.3	23.2	0.0	17.5	17.3	17.4	0.0	17.6	17.7	17.7
		64QAM	100	0	0.0	15.2	15.2	15.3	1.2	23.2	23.2	23.3	0.0	17.3	17.3	17.3	0.0	17.5	17.7	17.6
			1	0	0.0	15.1	15.2	15.1	1.2	23.2	23.3	23.3	0.0	17.4	17.5	17.3	0.0	17.7	17.6	17.5
			1	49	0.0	15.1	15.2	15.2	1.2	23.3	23.2	23.3	0.0	17.4	17.4	17.4	0.0	17.6	17.6	17.5
			1	99	0.0	15.2	15.2	15.3	1.2	23.3	23.3	23.2	0.0	17.4	17.5	17.5	0.0	17.5	17.7	17.5
			50	0	0.0	15.3	15.3	15.3	2.2	22.3	22.2	22.3	0.7	16.8	16.8	16.7	0.0	17.6	17.6	17.7
	50		24	0.0	15.2	15.2	15.2	2.2	22.3	22.3	22.2	0.7	16.6	16.7	16.6	0.0	17.5	17.6	17.6	
50	49	0.0	15.2	15.2	15.1	2.2	22.2	22.2	22.2	0.7	16.6	16.6	16.8	0.0	17.7	17.5	17.6			
100	0	0.0	15.2	15.3	15.1	2.2	22.3	22.3	22.3	0.7	16.7	16.7	16.7	0.0	17.6	17.7	17.5			
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A							MODE B								
Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1							
	2507.5 MHz	2535 MHz	2562.5 MHz		2507.5 MHz	2535 MHz	2562.5 MHz		2507.5 MHz	2535 MHz	2562.5 MHz		2507.5 MHz	2535 MHz	2562.5 MHz					
LTE Band 7	15	QPSK	1	0	0.0	15.1	15.3	15.2	0.0	24.3	24.5	24.4	0.0	17.5	17.3	17.5	0.0	17.5	17.6	17.5
			1	36	0.0	15.2	15.3	15.2	0.0	24.4	24.5	24.4	0.0	17.4	17.3	17.3	0.0	17.6	17.6	17.6
			1	74	0.0	15.2	15.2	15.3	0.0	24.4	24.5	24.4	0.0	17.4	17.3	17.4	0.0	17.6	17.7	17.6
			36	0	0.0	15.3	15.1	15.1	0.2	24.3	24.3	24.2	0.0	17.5	17.4	17.5	0.0	17.7	17.6	17.6
			36	18	0.0	15.2	15.2	15.1	0.2	24.2	24.3	24.2	0.0	17.4	17.4	17.5	0.0	17.6	17.6	17.5
			36	37	0.0	15.2	15.2	15.1	0.2	24.2	24.3	24.2	0.0	17.4	17.5	17.5	0.0	17.6	17.6	17.6
		75	0	0.0	15.3	15.2	15.2	0.2	24.2	24.2	24.3	0.0	17.5	17.4	17.4	0.0	17.5	17.7	17.6	
		16QAM	1	0	0.0	15.2	15.2	15.1	0.2	24.2	24.3	24.3	0.0	17.4	17.4	17.5	0.0	17.5	17.6	17.6
			1	36	0.0	15.1	15.2	15.2	0.2	24.3	24.2	24.3	0.0	17.4	17.4	17.3	0.0	17.7	17.6	17.5
			1	74	0.0	15.2	15.2	15.2	0.2	24.3	24.3	24.2	0.0	17.5	17.5	17.3	0.0	17.6	17.5	17.5
			36	0	0.0	15.3	15.2	15.2	1.2	23.2	23.2	23.2	0.0	17.4	17.4	17.4	0.0	17.7	17.7	17.5
			36	18	0.0	15.3	15.2	15.2	1.2	23.3	23.3	23.3	0.0	17.4	17.5	17.4	0.0	17.6	17.7	17.5
			36	37	0.0	15.2	15.2	15.3	1.2	23.2	23.3	23.2	0.0	17.3	17.3	17.5	0.0	17.6	17.6	17.6
		75	0	0.0	15.2	15.2	15.3	1.2	23.3	23.3	23.3	0.0	17.4	17.4	17.5	0.0	17.6	17.5	17.6	
		64QAM	1	0	0.0	15.2	15.2	15.3	1.2	23.2	23.2	23.2	0.0	17.4	17.5	17.4	0.0	17.5	17.6	17.5
			1	36	0.0	15.3	15.3	15.1	1.2	23.2	23.3	23.2	0.0	17.4	17.4	17.5	0.0	17.6	17.7	17.6
			1	74	0.0	15.1	15.2	15.3	1.2	23.2	23.3	23.3	0.0	17.5	17.4	17.3	0.0	17.6	17.6	17.5
			36	0	0.0	15.1	15.3	15.2	2.2	22.2	22.3	22.2	0.7	16.7	16.8	16.8	0.0	17.6	17.6	17.7
	36		18	0.0	15.2	15.1	15.2	2.2	22.2	22.3	22.2	0.7	16.7	16.7	16.6	0.0	17.7	17.7	17.6	
	36		37	0.0	15.2	15.2	15.3	2.2	22.2	22.2	22.3	0.7	16.6	16.7	16.7	0.0	17.6	17.6	17.6	
75	0	0.0	15.2	15.2	15.2	2.2	22.2	22.3	22.3	0.7	16.7	16.7	16.8	0.0	17.6	17.5	17.7			

LTE Band 7 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A									MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
						2505 MHz	2535 MHz	2565 MHz		2505 MHz	2535 MHz	2565 MHz		2505 MHz	2535 MHz	2565 MHz		2505 MHz	2535 MHz	2565 MHz		
LTE Band 7	10	QPSK	1	0	0.0	15.2	15.3	15.3	0.0	24.4	24.4	24.4	0.0	17.4	17.5	17.4	0.0	17.7	17.6	17.6		
			1	24	0.0	15.2	15.1	15.3	0.0	24.4	24.5	24.4	0.0	17.4	17.4	17.5	0.0	17.6	17.6	17.5		
			1	49	0.0	15.2	15.1	15.3	0.0	24.5	24.4	24.4	0.0	17.3	17.4	17.5	0.0	17.6	17.6	17.6		
			25	0	0.0	15.3	15.3	15.2	0.2	24.2	24.2	24.2	0.0	17.5	17.4	17.3	0.0	17.6	17.7	17.7		
			25	12	0.0	15.1	15.2	15.2	0.2	24.3	24.3	24.3	0.0	17.5	17.4	17.5	0.0	17.6	17.7	17.7		
			25	24	0.0	15.2	15.3	15.1	0.2	24.2	24.3	24.2	0.0	17.4	17.5	17.4	0.0	17.7	17.6	17.5		
		60	0	0.0	15.2	15.2	15.2	0.2	24.3	24.3	24.3	0.0	17.4	17.4	17.3	0.0	17.6	17.7	17.6			
		16QAM	1	0	0.0	15.2	15.2	15.2	0.2	24.2	24.2	24.2	0.0	17.5	17.3	17.4	0.0	17.6	17.7	17.6		
			1	24	0.0	15.1	15.3	15.2	0.2	24.2	24.3	24.2	0.0	17.3	17.3	17.5	0.0	17.6	17.6	17.5		
			1	49	0.0	15.3	15.2	15.2	0.2	24.2	24.3	24.3	0.0	17.5	17.4	17.4	0.0	17.5	17.5	17.7		
			25	0	0.0	15.2	15.3	15.3	1.2	23.2	23.2	23.3	0.0	17.5	17.5	17.4	0.0	17.5	17.7	17.5		
			25	12	0.0	15.3	15.2	15.2	1.2	23.3	23.3	23.2	0.0	17.4	17.5	17.4	0.0	17.5	17.6	17.6		
			25	24	0.0	15.3	15.2	15.2	1.2	23.3	23.2	23.2	0.0	17.4	17.4	17.4	0.0	17.6	17.7	17.6		
		60	0	0.0	15.3	15.2	15.1	1.2	23.3	23.3	23.2	0.0	17.4	17.5	17.5	0.0	17.5	17.5	17.5			
		64QAM	1	0	0.0	15.1	15.3	15.3	1.2	23.2	23.3	23.2	0.0	17.4	17.4	17.3	0.0	17.6	17.5	17.6		
			1	24	0.0	15.3	15.2	15.1	1.2	23.3	23.3	23.3	0.0	17.5	17.5	17.4	0.0	17.5	17.5	17.6		
			1	49	0.0	15.3	15.2	15.2	1.2	23.3	23.2	23.3	0.0	17.4	17.4	17.4	0.0	17.7	17.6	17.6		
			25	0	0.0	15.2	15.2	15.3	2.2	22.2	22.2	22.3	0.7	16.7	16.7	16.7	0.0	17.6	17.6	17.7		
			25	12	0.0	15.3	15.3	15.2	2.2	22.3	22.3	22.3	0.7	16.8	16.6	16.8	0.0	17.5	17.7	17.6		
			25	24	0.0	15.2	15.2	15.3	2.2	22.2	22.3	22.2	0.7	16.7	16.8	16.7	0.0	17.7	17.6	17.5		
		60	0	0.0	15.2	15.2	15.1	2.2	22.3	22.3	22.2	0.7	16.7	16.7	16.6	0.0	17.6	17.6	17.6			
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A									MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
						2502.5 MHz	2535 MHz	2567.5 MHz		2502.5 MHz	2535 MHz	2567.5 MHz		2502.5 MHz	2535 MHz	2567.5 MHz		2502.5 MHz	2535 MHz	2567.5 MHz		
LTE Band 7	5	QPSK	1	0	0.0	15.2	15.1	15.1	0.0	24.4	24.3	24.5	0.0	17.4	17.3	17.5	0.0	17.6	17.6	17.6		
			1	12	0.0	15.2	15.1	15.2	0.0	24.4	24.3	24.5	0.0	17.4	17.3	17.4	0.0	17.6	17.5	17.7		
			1	24	0.0	15.3	15.2	15.2	0.0	24.4	24.5	24.5	0.0	17.4	17.3	17.4	0.0	17.6	17.6	17.6		
			12	0	0.0	15.3	15.1	15.3	0.2	24.2	24.2	24.3	0.0	17.4	17.5	17.3	0.0	17.6	17.5	17.6		
			12	7	0.0	15.2	15.2	15.3	0.2	24.3	24.3	24.2	0.0	17.5	17.5	17.3	0.0	17.7	17.7	17.5		
			12	13	0.0	15.2	15.2	15.2	0.2	24.3	24.2	24.2	0.0	17.4	17.4	17.4	0.0	17.6	17.5	17.6		
		25	0	0.0	15.1	15.3	15.2	0.2	24.3	24.3	24.2	0.0	17.4	17.5	17.4	0.0	17.6	17.6	17.5			
		16QAM	1	0	0.0	15.1	15.2	15.2	0.2	24.2	24.3	24.2	0.0	17.5	17.4	17.5	0.0	17.5	17.7	17.7		
			1	12	0.0	15.2	15.3	15.3	0.2	24.3	24.3	24.3	0.0	17.4	17.4	17.3	0.0	17.6	17.6	17.5		
			1	24	0.0	15.1	15.2	15.3	0.2	24.3	24.2	24.3	0.0	17.5	17.4	17.5	0.0	17.6	17.5	17.5		
			12	0	0.0	15.2	15.2	15.2	1.2	23.2	23.3	23.2	0.0	17.5	17.4	17.4	0.0	17.6	17.6	17.6		
			12	7	0.0	15.2	15.2	15.1	1.2	23.3	23.3	23.2	0.0	17.4	17.5	17.4	0.0	17.7	17.6	17.6		
			12	13	0.0	15.3	15.3	15.2	1.2	23.2	23.2	23.2	0.0	17.5	17.4	17.4	0.0	17.5	17.6	17.6		
		25	0	0.0	15.2	15.2	15.3	1.2	23.2	23.3	23.3	0.0	17.4	17.5	17.4	0.0	17.6	17.7	17.6			
		64QAM	1	0	0.0	15.3	15.3	15.1	1.2	23.3	23.3	23.3	0.0	17.4	17.5	17.4	0.0	17.5	17.6	17.5		
			1	12	0.0	15.2	15.1	15.3	1.2	23.3	23.3	23.3	0.0	17.4	17.5	17.4	0.0	17.5	17.6	17.6		
			1	24	0.0	15.2	15.3	15.1	1.2	23.2	23.2	23.3	0.0	17.3	17.4	17.4	0.0	17.6	17.5	17.6		
			12	0	0.0	15.2	15.3	15.1	2.2	22.2	22.3	22.3	0.7	16.8	16.7	16.7	0.0	17.6	17.7	17.7		
			12	7	0.0	15.2	15.3	15.2	2.2	22.3	22.3	22.3	0.7	16.7	16.7	16.8	0.0	17.7	17.5	17.5		
			12	13	0.0	15.2	15.2	15.3	2.2	22.2	22.3	22.2	0.7	16.6	16.7	16.7	0.0	17.7	17.6	17.7		
		25	0	0.0	15.2	15.2	15.1	2.2	22.3	22.2	22.3	0.7	16.7	16.8	16.7	0.0	17.6	17.6	17.6			

LTE Band 12 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A						MODE B									
					Target MPR	UAT 1		Target MPR	LAT 1		Target MPR	UAT 1		Target MPR	LAT 1					
							707.5 MHz			707.5 MHz			707.5 MHz			707.5 MHz		707.5 MHz		
LTE Band 12	Max Power (dBm)					23.3			24.8			23.3			24.8					
	10	QPSK	1	0	0		23.3		0		24.7		0		23.3		0		24.7	
			1	24	0		23.3		0		24.8		0		23.3		0		24.8	
			1	49	0		23.3		0		24.8		0		23.3		0		24.8	
			25	0	1		22.1		1		23.8		1		22.1		1		23.8	
			25	12	1		22.3		1		23.8		1		22.3		1		23.8	
			25	24	1		22.1		1		23.8		1		22.1		1		23.8	
		64QAM	50	0	1		22.2		1		23.8		1		22.2		1		23.8	
		1	0	1		22.3		1		23.8		1		22.3		1		23.8		
		1	24	1		22.3		1		23.8		1		22.3		1		23.8		
		1	49	1		22.2		1		23.8		1		22.2		1		23.8		
		25	0	2		21.3		2		22.8		2		21.3		2		22.8		
		25	12	2		21.3		2		22.8		2		21.3		2		22.8		
		25	24	2		21.2		2		22.8		2		21.2		2		22.8		
		50	0	2		21.3		2		22.6		2		21.3		2		22.6		
		64QAM	1	0	2		21.2		2		22.6		2		21.2		2		22.6	
			1	24	2		21.3		2		22.8		2		21.3		2		22.8	
			1	49	2		21.3		2		22.8		2		21.3		2		22.8	
			25	0	3		20.3		3		21.8		3		20.3		3		21.8	
	25		12	3		20.2		3		21.8		3		20.2		3		21.8		
	25		24	3		20.3		3		21.8		3		20.3		3		21.8		
	50	0	3		20.3		3		21.7		3		20.3		3		21.7			
	Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A						MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz
LTE Band 12	5	QPSK	1	0	0	23.2	23.2	23.2	0	24.7	24.8	24.8	0	23.2	23.2	23.2	0	24.7	24.8	24.8
			1	12	0	23.3	23.3	23.3	0	24.8	24.8	24.8	0	23.3	23.3	23.3	0	24.8	24.8	24.8
			1	24	0	23.2	23.2	23.2	0	24.7	24.8	24.7	0	23.2	23.2	23.2	0	24.7	24.8	24.7
			12	0	1	22.3	22.3	22.3	1	23.8	23.8	23.7	1	22.3	22.3	22.3	1	23.8	23.8	23.7
			12	7	1	22.3	22.3	22.3	1	23.7	23.8	23.7	1	22.3	22.3	22.3	1	23.7	23.8	23.7
			12	13	1	22.2	22.2	22.2	1	23.7	23.8	23.7	1	22.2	22.2	22.2	1	23.7	23.8	23.7
		16QAM	25	0	1	22.3	22.3	22.3	1	23.7	23.7	23.8	1	22.3	22.3	22.3	1	23.7	23.7	23.8
			1	0	1	22.3	22.3	22.3	1	23.7	23.8	23.8	1	22.3	22.3	22.3	1	23.7	23.8	23.8
			1	12	1	22.2	22.2	22.2	1	23.8	23.7	23.8	1	22.2	22.2	22.2	1	23.8	23.7	23.8
			1	24	1	22.2	22.2	22.2	1	23.8	23.8	23.7	1	22.2	22.2	22.2	1	23.8	23.8	23.7
			12	0	2	21.3	21.3	21.3	2	22.8	22.8	22.7	2	21.3	21.3	21.3	2	22.8	22.8	22.7
			12	7	2	21.3	21.3	21.3	2	22.7	22.7	22.7	2	21.3	21.3	21.3	2	22.7	22.7	22.7
		64QAM	12	13	2	21.3	21.3	21.3	2	22.7	22.6	22.8	2	21.3	21.3	21.3	2	22.7	22.6	22.8
			25	0	2	21.2	21.2	21.2	2	22.8	22.7	22.7	2	21.2	21.2	21.2	2	22.8	22.7	22.7
			1	0	2	21.3	21.2	21.2	2	22.7	22.7	22.6	2	21.3	21.2	21.2	2	22.7	22.7	22.6
			1	12	2	21.3	21.3	21.3	2	22.7	22.7	22.7	2	21.3	21.3	21.3	2	22.7	22.7	22.7
			1	24	2	21.3	21.2	21.2	2	22.7	22.8	22.8	2	21.3	21.2	21.2	2	22.7	22.8	22.8
			12	0	3	20.3	20.2	20.3	3	21.7	21.8	21.7	3	20.3	20.2	20.3	3	21.7	21.8	21.7
12	7	3	20.3	20.3	20.2	3	21.7	21.8	21.7	3	20.3	20.3	20.2	3	21.7	21.8	21.7			
12	13	3	20.2	20.2	20.2	3	21.7	21.7	21.8	3	20.2	20.2	20.2	3	21.7	21.7	21.8			
25	0	3	20.3	20.3	20.3	3	21.7	21.8	21.8	3	20.3	20.3	20.3	3	21.7	21.8	21.8			

LTE Band 12 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A									MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
						700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz		
LTE Band 12	3	QPSK	1	0	0	23.2	23.2	23.2	0	24.7	24.8	24.7	0	23.2	23.2	23.2	0	24.7	24.8	24.7		
			1	8	0	23.2	23.2	23.2	0	24.7	24.8	24.7	0	23.2	23.2	23.2	0	24.7	24.8	24.7		
			1	14	0	23.2	23.2	23.2	0	24.7	24.7	24.8	0	23.2	23.2	23.2	0	24.7	24.7	24.8		
			8	0	1	22.3	22.3	22.3	1	23.7	23.7	23.7	1	22.3	22.3	22.3	1	23.7	23.7	23.7		
			8	4	1	22.3	22.3	22.3	1	23.7	23.8	23.7	1	22.3	22.3	22.3	1	23.7	23.8	23.7		
			8	7	1	22.3	22.3	22.3	1	23.7	23.8	23.8	1	22.3	22.3	22.3	1	23.7	23.8	23.8		
		15	0	1	22.3	22.3	22.3	1	23.7	23.7	23.8	1	22.3	22.3	22.3	1	23.7	23.7	23.8			
		16QAM	1	0	1	22.2	22.2	22.2	1	23.8	23.8	23.7	1	22.2	22.2	22.2	1	23.8	23.8	23.7		
			1	8	1	22.2	22.2	22.2	1	23.8	23.7	23.7	1	22.2	22.2	22.2	1	23.8	23.7	23.7		
			1	14	1	22.2	22.2	22.2	1	23.8	23.8	23.7	1	22.2	22.2	22.2	1	23.8	23.8	23.7		
			8	0	2	21.3	21.3	21.3	2	22.7	22.8	22.6	2	21.3	21.3	21.3	2	22.7	22.8	22.6		
			8	4	2	21.3	21.3	21.3	2	22.7	22.7	22.7	2	21.3	21.3	21.3	2	22.7	22.7	22.7		
			8	7	2	21.3	21.3	21.3	2	22.7	22.6	22.7	2	21.3	21.3	21.3	2	22.7	22.6	22.7		
		15	0	2	21.2	21.2	21.2	2	22.6	22.7	22.6	2	21.2	21.2	21.2	2	22.6	22.7	22.6			
		64QAM	1	0	2	21.3	21.3	21.2	2	22.7	22.8	22.7	2	21.3	21.3	21.2	2	22.7	22.8	22.7		
			1	8	2	21.2	21.3	21.3	2	22.7	22.7	22.6	2	21.2	21.3	21.3	2	22.7	22.7	22.6		
			1	14	2	21.3	21.2	21.3	2	22.7	22.7	22.8	2	21.3	21.2	21.3	2	22.7	22.7	22.8		
			8	0	3	20.2	20.3	20.3	3	21.7	21.8	21.7	3	20.2	20.3	20.3	3	21.7	21.8	21.7		
8	4		3	20.3	20.3	20.3	3	21.7	21.8	21.8	3	20.3	20.3	20.3	3	21.7	21.8	21.8				
8	7		3	20.2	20.3	20.2	3	21.7	21.7	21.8	3	20.2	20.3	20.2	3	21.7	21.7	21.8				
15	0	3	20.3	20.2	20.3	3	21.8	21.8	21.7	3	20.3	20.2	20.3	3	21.8	21.8	21.7					
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A									MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
						699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz		
LTE Band 12	1.4	QPSK	1	0	0	23.2	23.2	23.2	0	24.7	24.7	24.7	0	23.2	23.2	23.2	0	24.7	24.7	24.7		
			1	2	0	23.2	23.2	23.2	0	24.7	24.8	24.7	0	23.2	23.2	23.2	0	24.7	24.8	24.7		
			1	5	0	23.1	23.1	23.1	0	24.7	24.8	24.8	0	23.1	23.1	23.1	0	24.7	24.8	24.8		
			3	0	1	23.1	23.1	23.1	1	24.7	24.7	24.8	1	23.1	23.1	23.1	1	24.7	24.7	24.8		
			3	1	1	23.2	23.2	23.2	1	24.8	24.8	24.7	1	23.2	23.2	23.2	1	24.8	24.8	24.7		
			3	2	1	23.2	23.2	23.2	1	24.8	24.7	24.7	1	23.2	23.2	23.2	1	24.8	24.7	24.7		
		6	0	1	22.3	22.2	22.2	1	23.7	23.8	23.8	1	22.3	22.2	22.2	1	23.7	23.8	23.8			
		16QAM	1	0	1	22.3	22.3	22.3	1	23.8	23.8	23.8	1	22.3	22.3	22.3	1	23.8	23.8	23.8		
			1	2	1	22.3	22.3	22.3	1	23.8	23.8	23.8	1	22.3	22.3	22.3	1	23.8	23.8	23.8		
			1	5	1	22.3	22.3	22.3	1	23.7	23.7	23.8	1	22.3	22.3	22.3	1	23.7	23.7	23.8		
			3	0	2	22.3	22.3	22.3	2	23.8	23.7	23.7	2	22.3	22.3	22.3	2	23.8	23.7	23.7		
			3	1	2	22.3	22.3	22.3	2	23.7	23.8	23.7	2	22.3	22.3	22.3	2	23.7	23.8	23.7		
			3	2	2	22.2	22.2	22.2	2	23.7	23.8	23.7	2	22.2	22.2	22.2	2	23.7	23.8	23.7		
		6	0	2	21.3	21.3	21.3	2	22.7	22.8	22.8	2	21.3	21.3	21.3	2	22.7	22.8	22.8			
		64QAM	1	0	2	21.3	21.3	21.3	2	22.8	22.7	22.6	2	21.3	21.3	21.3	2	22.8	22.7	22.6		
			1	2	2	21.3	21.3	21.3	2	22.7	22.8	22.7	2	21.3	21.3	21.3	2	22.7	22.8	22.7		
			1	5	2	21.3	21.3	21.2	2	22.7	22.8	22.7	2	21.3	21.3	21.2	2	22.7	22.8	22.7		
			3	0	3	21.2	21.2	21.3	3	22.7	22.7	22.6	3	21.2	21.2	21.3	3	22.7	22.7	22.6		
3	1		3	21.3	21.3	21.3	3	22.6	22.6	22.8	3	21.3	21.3	21.3	3	22.6	22.6	22.8				
3	2		3	21.2	21.3	21.2	3	22.6	22.8	22.6	3	21.2	21.3	21.2	3	22.6	22.8	22.6				
6	0	3	20.3	20.3	20.3	3	21.8	21.7	21.7	3	20.3	20.3	20.3	3	21.8	21.7	21.7					

LTE Band 13 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A						MODE B									
					Target MPR	UAT 1		Target MPR	LAT 1		Target MPR	UAT 1		Target MPR	LAT 1					
							782 MHz			782 MHz			782 MHz			782 MHz				
LTE Band 13	Max Power (dBm)				23.3				24.8				23.3				24.8			
	10	QPSK	1	0	0		23.0		0		24.8		0		23.0		0		24.8	
			1	24	0		23.3		0		24.8		0		23.3		0		24.8	
			1	49	0		23.3		0		24.8		0		23.3		0		24.8	
			25	0	1		22.3		1		23.8		1		22.3		1		23.8	
			25	12	1		22.3		1		23.8		1		22.3		1		23.8	
			25	24	1		22.2		1		23.8		1		22.2		1		23.8	
		50	0	1		22.3		1		23.8		1		22.3		1		23.8		
		1	0	1		21.9		1		23.7		1		21.9		1		23.7		
		1	24	1		22.3		1		23.8		1		22.3		1		23.8		
		1	49	1		22.3		1		23.7		1		22.3		1		23.7		
		25	0	2		21.3		2		22.7		2		21.3		2		22.7		
		25	12	2		21.2		2		22.8		2		21.2		2		22.8		
		25	24	2		21.2		2		22.8		2		21.2		2		22.8		
		50	0	2		21.2		2		22.8		2		21.2		2		22.8		
		1	0	2		21.3		2		22.8		2		21.3		2		22.8		
		1	24	2		21.2		2		22.8		2		21.2		2		22.8		
		1	49	2		21.1		2		22.8		2		21.1		2		22.8		
		25	0	3		20.3		3		21.7		3		20.3		3		21.7		
	25	12	3		20.2		3		21.8		3		20.2		3		21.8			
	25	24	3		20.3		3		21.7		3		20.3		3		21.7			
	50	0	3		20.2		3		21.8		3		20.2		3		21.8			
	Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A						MODE B								
					Target MPR	UAT 1		Target MPR	LAT 1		Target MPR	UAT 1		Target MPR	LAT 1					
							782 MHz			782 MHz			782 MHz			782 MHz				
LTE Band 13	5	QPSK	1	0	0		23.3		0		24.8		0		23.3		0		24.8	
			1	12	0		23.2		0		24.8		0		23.2		0		24.8	
			1	24	0		23.2		0		24.8		0		23.2		0		24.8	
			12	0	1		22.3		1		23.7		1		22.3		1		23.7	
			12	7	1		22.3		1		23.7		1		22.3		1		23.7	
			12	13	1		22.2		1		23.8		1		22.2		1		23.8	
		25	0	1		22.3		1		23.8		1		22.3		1		23.8		
		1	0	1		22.3		1		23.8		1		22.3		1		23.8		
		1	12	1		22.2		1		23.8		1		22.2		1		23.8		
		1	24	1		22.2		1		23.8		1		22.2		1		23.8		
		12	0	2		21.3		2		22.8		2		21.3		2		22.8		
		12	7	2		21.3		2		22.8		2		21.3		2		22.8		
		12	13	2		21.3		2		22.8		2		21.3		2		22.8		
		25	0	2		21.3		2		22.7		2		21.3		2		22.7		
		1	0	2		21.2		2		22.7		2		21.2		2		22.7		
		1	12	2		21.2		2		22.8		2		21.2		2		22.8		
		1	24	2		21.3		2		22.8		2		21.3		2		22.8		
		12	0	3		20.3		3		21.8		3		20.3		3		21.8		
12	7	3		20.2		3		21.8		3		20.2		3		21.8				
12	13	3		20.2		3		21.7		3		20.2		3		21.7				
25	0	3		20.2		3		21.8		3		20.2		3		21.8				

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 17 Average Power (dBm) Measured Results

SAR for LTE Band 17 (Frequency range: 704 – 716 MHz) is covered by LTE Band 12 (Frequency range: 699 – 716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 25 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A									MODE B									
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1					
						1860 MHz	1882.5 MHz	1905 MHz		1860 MHz	1882.5 MHz	1905 MHz		1860 MHz	1882.5 MHz	1905 MHz		1860 MHz	1882.5 MHz	1905 MHz			
LTE Band 25	Max Power (dBm)					17.5				24.3				19.3				19.8					
	20	QPSK	1	0	0.0	17.1	17.1	17.0	0.0	24.0	24.0	24.0	0.0	19.0	19.0	19.2	0.0	19.8	19.8	19.8			
			1	49	0.0	17.1	17.1	17.1	0.0	24.0	24.0	24.0	0.0	19.0	19.1	19.3	0.0	19.6	19.8	19.8			
			1	99	0.0	17.1	17.0	17.1	0.0	24.0	24.0	24.0	0.0	19.0	19.0	19.3	0.0	19.7	19.7	19.8			
			50	0	0.0	17.0	17.0	17.1	1.0	23.2	23.0	23.2	0.0	19.0	19.0	19.3	0.0	19.6	19.8	19.7			
			50	24	0.0	17.1	17.1	17.1	1.0	23.2	23.1	23.3	0.0	19.0	19.1	19.3	0.0	19.8	19.8	19.8			
			50	49	0.0	17.0	17.1	17.1	1.0	23.2	23.1	23.3	0.0	19.0	19.1	19.2	0.0	19.6	19.7	19.8			
		16QAM	100	0	0.0	17.1	17.1	17.1	1.0	23.3	23.3	23.3	0.0	19.0	19.1	19.0	0.0	19.8	19.8	19.8			
		1	0	0.0	17.2	17.1	17.2	1.0	23.2	23.3	23.2	0.0	19.2	19.1	19.3	0.0	19.6	19.8	19.7				
		1	49	0.0	17.2	17.1	17.0	1.0	23.2	23.3	23.2	0.0	19.1	19.0	19.3	0.0	19.7	19.8	19.7				
		1	99	0.0	17.2	17.0	17.0	1.0	23.2	23.1	23.3	0.0	19.2	19.3	19.3	0.0	19.7	19.8	19.7				
		50	0	0.0	17.2	17.2	17.2	2.0	22.1	22.3	22.2	0.5	18.1	18.3	18.2	0.0	19.7	19.6	19.8				
		50	24	0.0	17.2	17.2	17.1	2.0	22.2	22.3	22.2	0.5	18.2	18.3	18.2	0.0	19.7	19.6	19.8				
		50	49	0.0	17.1	17.2	17.1	2.0	22.2	22.3	22.2	0.5	18.2	18.3	18.2	0.0	19.7	19.8	19.8				
		100	0	0.0	17.0	17.0	17.2	2.0	22.2	22.1	22.3	0.5	18.2	18.1	18.3	0.0	19.7	19.7	19.8				
		64QAM	1	0	0.0	17.2	17.2	17.1	2.0	22.2	22.1	22.3	0.5	18.2	18.1	18.3	0.0	19.6	19.7	19.7			
		1	49	0.0	17.0	17.2	17.1	2.0	22.2	22.3	22.3	0.5	18.2	18.3	18.3	0.0	19.8	19.6	19.7				
		1	99	0.0	17.0	17.0	17.1	2.0	22.1	22.3	22.2	0.5	18.1	18.3	18.2	0.0	19.7	19.8	19.6				
		50	0	0.0	17.1	17.1	17.2	3.0	21.2	21.2	21.3	1.5	17.1	17.3	17.2	0.0	19.6	19.7	19.6				
	50	24	0.0	17.2	17.1	17.2	3.0	21.2	21.3	21.2	1.5	17.2	17.3	17.2	0.0	19.7	19.7	19.7					
	50	49	0.0	17.0	17.2	17.1	3.0	21.3	21.1	21.2	1.5	17.2	17.3	17.2	0.0	19.7	19.8	19.7					
	100	0	0.0	17.1	17.1	17.1	3.0	21.2	21.2	21.2	1.5	17.2	17.1	17.3	0.0	19.7	19.7	19.8					
	Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A									MODE B								
						Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
1857.5 MHz							1882.5 MHz	1907.5 MHz	1857.5 MHz		1882.5 MHz	1907.5 MHz	1857.5 MHz		1882.5 MHz	1907.5 MHz	1857.5 MHz		1882.5 MHz	1907.5 MHz			
LTE Band 25						15	QPSK	1	0	0.0	17.2	17.2	17.2	0.0	24.1	24.3	24.2	0.0	19.2	19.3	19.3	0.0	19.8
	1	36	0.0	17.2	17.2			17.1	0.0	24.2	24.3	24.2	0.0	19.3	19.3	19.3	0.0	19.7	19.7	19.7			
	1	74	0.0	17.2	17.2			17.1	0.0	24.2	24.3	24.2	0.0	19.2	19.3	19.2	0.0	19.7	19.6	19.8			
	36	0	0.0	17.2	17.1			17.2	1.0	23.2	23.1	23.3	0.0	19.1	19.0	19.3	0.0	19.8	19.7	19.7			
	36	18	0.0	17.1	17.1			17.2	1.0	23.2	23.3	23.3	0.0	19.2	19.3	19.3	0.0	19.7	19.7	19.6			
	36	37	0.0	17.1	17.2			17.2	1.0	23.1	23.3	23.2	0.0	19.1	19.3	19.1	0.0	19.7	19.7	19.7			
	64QAM	75	0	0.0	17.1		17.1	17.0	1.0	23.3	23.2	23.1	0.0	19.2	19.3	19.2	0.0	19.7	19.8	19.8			
	1	0	0.0	17.2	17.1		17.1	1.0	23.2	23.2	23.1	0.0	19.3	19.3	19.2	0.0	19.7	19.8	19.8				
	1	36	0.0	17.1	17.2		17.2	1.0	23.1	23.3	23.1	0.0	19.2	19.3	19.2	0.0	19.8	19.7	19.6				
	1	74	0.0	17.2	17.2		17.1	1.0	22.2	22.3	22.3	0.0	19.2	19.3	19.2	0.0	19.7	19.8	19.7				
	36	0	0.0	17.2	17.1		17.0	2.0	22.2	22.3	22.3	0.5	18.3	18.2	18.1	0.0	19.7	19.8	19.7				
	36	18	0.0	17.2	17.1		17.0	2.0	22.3	22.2	22.1	0.5	18.2	18.2	18.1	0.0	19.7	19.6	19.7				
	36	37	0.0	17.2	17.2		17.2	2.0	22.2	22.3	22.2	0.5	18.1	18.3	18.1	0.0	19.6	19.6	19.7				
	75	0	0.0	17.2	17.1		17.2	2.0	22.2	22.3	22.2	0.5	18.2	18.2	18.3	0.0	19.8	19.7	19.7				
	64QAM	1	0	0.0	17.2		17.2	17.0	2.0	22.2	22.2	22.1	0.5	18.1	18.2	18.2	0.0	19.7	19.7	19.8			
	1	36	0.0	17.2	17.2		17.0	2.0	22.1	22.1	22.3	0.5	18.3	18.1	18.2	0.0	19.6	19.8	19.7				
	1	74	0.0	17.1	17.2		17.2	2.0	22.1	22.3	22.3	0.5	18.2	18.3	18.1	0.0	19.8	19.6	19.8				
	36	0	0.0	17.1	17.1		17.2	3.0	21.2	21.3	21.2	1.5	17.2	17.1	17.3	0.0	19.6	19.8	19.7				
	36	18	0.0	17.1	17.1	17.2	3.0	21.2	21.1	21.3	1.5	17.2	17.3	17.3	0.0	19.8	19.8	19.7					
	36	37	0.0	17.1	17.2	17.2	3.0	21.2	21.1	21.3	1.5	17.1	17.3	17.2	0.0	19.7	19.7	19.6					
	75	0	0.0	17.2	17.1	17.0	3.0	21.2	21.3	21.3	1.5	17.3	17.2	17.1	0.0	19.7	19.6	19.8					

LTE Band 25 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A									MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
						1855 MHz	1882.5 MHz	1910 MHz		1855 MHz	1882.5 MHz	1910 MHz		1855 MHz	1882.5 MHz	1910 MHz		1855 MHz	1882.5 MHz	1910 MHz		
LTE Band 25	10	QPSK	1	0	0.0	17.2	17.1	17.2	0.0	24.2	24.2	24.2	0.0	19.2	19.2	19.3	0.0	19.6	19.7	19.7		
			1	24	0.0	17.2	17.2	17.1	0.0	24.2	24.3	24.2	0.0	19.2	19.3	19.3	0.0	19.7	19.6	19.7		
			1	49	0.0	17.0	17.1	17.2	0.0	24.3	24.2	24.2	0.0	19.3	19.2	19.3	0.0	19.7	19.8	19.8		
			25	0	0.0	17.2	17.2	17.0	1.0	23.2	23.1	23.2	0.0	19.3	19.3	19.2	0.0	19.8	19.6	19.6		
			25	12	0.0	17.0	17.1	17.1	1.0	23.1	23.1	23.2	0.0	19.1	19.1	19.3	0.0	19.8	19.7	19.8		
			25	24	0.0	17.1	17.2	17.0	1.0	23.3	23.2	23.2	0.0	19.0	19.2	19.2	0.0	19.7	19.7	19.7		
			50	0	0.0	17.1	17.1	17.2	1.0	23.2	23.2	23.3	0.0	19.3	19.1	19.2	0.0	19.7	19.6	19.7		
		16QAM	1	0	0.0	17.0	17.0	17.1	1.0	23.1	23.3	23.2	0.0	19.3	19.3	19.3	0.0	19.7	19.7	19.6		
			1	24	0.0	17.0	17.0	17.0	1.0	23.3	23.2	23.1	0.0	19.2	19.2	19.2	0.0	19.8	19.8	19.8		
			1	49	0.0	17.2	17.1	17.2	1.0	23.2	23.2	23.2	0.0	19.2	19.3	19.2	0.0	19.8	19.7	19.7		
			25	0	0.0	17.0	17.2	17.0	2.0	22.1	22.2	22.2	0.5	18.1	18.2	18.1	0.0	19.8	19.7	19.8		
			25	12	0.0	17.1	17.0	17.1	2.0	22.3	22.1	22.3	0.5	18.2	18.2	18.2	0.0	19.7	19.7	19.7		
			25	24	0.0	17.1	17.2	17.1	2.0	22.2	22.3	22.2	0.5	18.2	18.3	18.2	0.0	19.7	19.6	19.8		
			50	0	0.0	17.1	17.1	17.2	2.0	22.1	22.1	22.2	0.5	18.3	18.2	18.2	0.0	19.7	19.8	19.6		
		64QAM	1	0	0.0	17.2	17.0	17.2	2.0	22.3	22.2	22.2	0.5	18.2	18.2	18.1	0.0	19.8	19.8	19.7		
			1	24	0.0	17.2	17.1	17.1	2.0	22.1	22.2	22.1	0.5	18.2	18.2	18.2	0.0	19.6	19.8	19.7		
			1	49	0.0	17.0	17.2	17.1	2.0	22.2	22.3	22.1	0.5	18.1	18.3	18.2	0.0	19.6	19.8	19.7		
			25	0	0.0	17.1	17.0	17.1	3.0	21.2	21.2	21.2	1.5	17.1	17.1	17.2	0.0	19.7	19.6	19.7		
			25	12	0.0	17.2	17.1	17.2	3.0	21.2	21.3	21.2	1.5	17.3	17.3	17.2	0.0	19.6	19.6	19.7		
			25	24	0.0	17.0	17.2	17.2	3.0	21.3	21.2	21.2	1.5	17.1	17.2	17.2	0.0	19.8	19.6	19.8		
			50	0	0.0	17.1	17.2	17.2	3.0	21.2	21.2	21.1	1.5	17.3	17.1	17.3	0.0	19.8	19.8	19.7		
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A									MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
						1852.5 MHz	1882.5 MHz	1912.5 MHz		1852.5 MHz	1882.5 MHz	1912.5 MHz		1852.5 MHz	1882.5 MHz	1912.5 MHz		1852.5 MHz	1882.5 MHz	1912.5 MHz		
LTE Band 25	5	QPSK	1	0	0.0	17.2	17.1	17.1	0.0	24.3	24.2	24.2	0.0	19.2	19.3	19.3	0.0	19.7	19.7	19.7		
			1	12	0.0	17.2	17.1	17.0	0.0	24.3	24.2	24.3	0.0	19.2	19.2	19.3	0.0	19.8	19.6	19.8		
			1	24	0.0	17.1	17.2	17.2	0.0	24.2	24.2	24.2	0.0	19.3	19.3	19.2	0.0	19.6	19.8	19.6		
			12	0	0.0	17.1	17.2	17.2	1.0	23.1	23.1	23.2	0.0	19.3	19.2	19.2	0.0	19.6	19.7	19.6		
			12	7	0.0	17.2	17.1	17.1	1.0	23.3	23.3	23.2	0.0	19.3	19.3	19.2	0.0	19.6	19.7	19.7		
			12	13	0.0	17.1	17.1	17.2	1.0	23.1	23.2	23.2	0.0	19.2	19.3	19.2	0.0	19.7	19.8	19.6		
			25	0	0.0	17.2	17.0	17.1	1.0	23.3	23.1	23.3	0.0	19.3	19.3	19.3	0.0	19.8	19.6	19.7		
		16QAM	1	0	0.0	17.2	17.2	17.1	1.0	23.1	23.3	23.2	0.0	19.3	19.2	19.3	0.0	19.7	19.7	19.7		
			1	12	0.0	17.2	17.2	17.1	1.0	23.3	23.3	23.2	0.0	19.2	19.3	19.2	0.0	19.6	19.6	19.7		
			1	24	0.0	17.1	17.0	17.0	1.0	23.2	23.2	23.1	0.0	19.3	19.3	19.2	0.0	19.6	19.8	19.7		
			12	0	0.0	17.0	17.0	17.2	2.0	22.1	22.2	22.2	0.5	18.2	18.2	18.3	0.0	19.7	19.6	19.8		
			12	7	0.0	17.2	17.2	17.1	2.0	22.3	22.1	22.2	0.5	18.3	18.3	18.2	0.0	19.6	19.8	19.7		
			12	13	0.0	17.0	17.0	17.1	2.0	22.1	22.2	22.3	0.5	18.2	18.2	18.2	0.0	19.6	19.8	19.8		
			25	0	0.0	17.1	17.2	17.1	2.0	22.2	22.1	22.3	0.5	18.2	18.1	18.3	0.0	19.7	19.8	19.7		
		64QAM	1	0	0.0	17.2	17.1	17.2	2.0	22.2	22.3	22.2	0.5	18.3	18.2	18.2	0.0	19.6	19.6	19.7		
			1	12	0.0	17.2	17.2	17.1	2.0	22.2	22.2	22.2	0.5	18.2	18.2	18.1	0.0	19.8	19.7	19.7		
			1	24	0.0	17.1	17.2	17.1	2.0	22.2	22.2	22.3	0.5	18.2	18.2	18.2	0.0	19.7	19.7	19.8		
			12	0	0.0	17.2	17.1	17.1	3.0	21.2	21.2	21.2	1.5	17.1	17.3	17.2	0.0	19.6	19.7	19.8		
			12	7	0.0	17.0	17.2	17.2	3.0	21.2	21.1	21.3	1.5	17.2	17.1	17.3	0.0	19.7	19.8	19.6		
			12	13	0.0	17.2	17.1	17.2	3.0	21.2	21.2	21.2	1.5	17.1	17.3	17.2	0.0	19.8	19.8	19.7		
			25	0	0.0	17.2	17.2	17.2	3.0	21.2	21.1	21.2	1.5	17.1	17.3	17.3	0.0	19.6	19.6	19.7		

LTE Band 25 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A									MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1				
						1851.5 MHz	1882.5 MHz	1913.5 MHz		1851.5 MHz	1882.5 MHz	1913.5 MHz		1851.5 MHz	1882.5 MHz	1913.5 MHz		1851.5 MHz	1882.5 MHz	1913.5 MHz		
LTE Band 25	3	QPSK	1	0	0.0	17.2	17.1	17.1	0.0	24.2	24.3	24.3	0.0	19.2	19.2	19.2	0.0	19.7	19.8	19.7		
			1	8	0.0	17.2	17.0	17.0	0.0	24.2	24.3	24.3	0.0	19.2	19.3	19.3	0.0	19.7	19.8	19.8		
			1	14	0.0	17.2	17.1	17.0	0.0	24.3	24.2	24.1	0.0	19.3	19.3	19.3	0.0	19.7	19.8	19.7		
			8	0	0.0	17.1	17.2	17.0	1.0	23.3	23.1	23.2	0.0	19.3	19.3	19.3	0.0	19.7	19.7	19.6		
			8	4	0.0	17.1	17.1	17.2	1.0	23.2	23.2	23.2	0.0	19.2	19.2	19.3	0.0	19.6	19.7	19.6		
			8	7	0.0	17.1	17.1	17.1	1.0	23.1	23.1	23.2	0.0	19.1	19.2	19.1	0.0	19.6	19.6	19.7		
		16QAM	15	0	0.0	17.0	17.0	17.1	1.0	23.1	23.3	23.2	0.0	19.0	19.2	19.2	0.0	19.7	19.7	19.7		
			1	0	0.0	17.2	17.0	17.1	1.0	23.2	23.1	23.3	0.0	19.0	19.1	19.2	0.0	19.8	19.6	19.8		
			1	8	0.0	17.2	17.1	17.2	1.0	23.1	23.3	23.2	0.0	19.2	19.3	19.3	0.0	19.6	19.8	19.7		
			1	14	0.0	17.0	17.1	17.0	1.0	23.1	23.3	23.3	0.0	19.2	19.3	19.3	0.0	19.7	19.7	19.8		
			8	0	0.0	17.2	17.2	17.0	2.0	22.2	22.2	22.3	0.5	18.1	18.1	18.2	0.0	19.7	19.7	19.8		
			8	4	0.0	17.1	17.1	17.0	2.0	22.2	22.3	22.2	0.5	18.3	18.3	18.2	0.0	19.7	19.6	19.8		
		64QAM	8	7	0.0	17.2	17.2	17.1	2.0	22.3	22.1	22.2	0.5	18.1	18.2	18.2	0.0	19.6	19.7	19.7		
			15	0	0.0	17.2	17.2	17.2	2.0	22.2	22.2	22.2	0.5	18.3	18.1	18.3	0.0	19.7	19.7	19.6		
			1	0	0.0	17.0	17.2	17.0	2.0	22.1	22.3	22.2	0.5	18.1	18.3	18.2	0.0	19.7	19.6	19.8		
			1	8	0.0	17.1	17.2	17.0	2.0	22.3	22.3	22.2	0.5	18.3	18.3	18.2	0.0	19.8	19.7	19.7		
			1	14	0.0	17.1	17.1	17.1	2.0	22.2	22.3	22.2	0.5	18.2	18.2	18.1	0.0	19.7	19.6	19.7		
			8	0	0.0	17.2	17.2	17.1	3.0	21.2	21.2	21.1	1.5	17.3	17.1	17.3	0.0	19.8	19.7	19.7		
LTE Band 25	1.4	QPSK	8	4	0.0	17.2	17.1	17.0	3.0	21.2	21.2	21.2	1.5	17.2	17.3	17.2	0.0	19.6	19.7	19.7		
			8	7	0.0	17.0	17.2	17.2	3.0	21.2	21.3	21.3	1.5	17.1	17.1	17.2	0.0	19.6	19.6	19.7		
			15	0	0.0	17.1	17.1	17.0	3.0	21.2	21.3	21.3	1.5	17.3	17.2	17.2	0.0	19.7	19.6	19.7		
			1	0	0.0	17.0	17.2	17.1	0.0	24.3	24.3	24.2	0.0	19.3	19.3	19.2	0.0	19.7	19.7	19.8		
			1	3	0.0	17.0	17.2	17.0	0.0	24.2	24.3	24.2	0.0	19.1	19.3	19.3	0.0	19.6	19.7	19.7		
			1	5	0.0	17.2	17.0	17.0	0.0	24.2	24.1	24.2	0.0	19.3	19.3	19.2	0.0	19.8	19.8	19.7		
		16QAM	3	0	0.0	17.1	17.1	17.2	0.0	24.2	24.1	24.3	0.0	19.1	19.2	19.3	0.0	19.8	19.6	19.8		
			3	1	0.0	17.1	17.2	17.0	0.0	24.2	24.3	24.2	0.0	19.3	19.3	19.2	0.0	19.8	19.7	19.6		
			3	3	0.0	17.1	17.2	17.0	0.0	24.2	24.2	24.2	0.0	19.2	19.2	19.2	0.0	19.7	19.7	19.6		
			6	0	0.0	17.2	17.2	17.2	1.0	23.2	23.2	23.3	0.0	19.2	19.2	19.3	0.0	19.7	19.6	19.7		
			1	0	0.0	17.2	17.1	17.1	1.0	23.2	23.3	23.2	0.0	19.2	19.3	19.3	0.0	19.8	19.8	19.7		
			1	3	0.0	17.0	17.1	17.0	1.0	23.3	23.1	23.2	0.0	19.2	19.2	19.2	0.0	19.6	19.7	19.7		
		64QAM	1	5	0.0	17.0	17.1	17.1	1.0	23.2	23.2	23.2	0.0	19.3	19.2	19.3	0.0	19.8	19.7	19.7		
			3	0	0.0	17.1	17.0	17.1	1.0	23.1	23.3	23.2	0.0	19.0	19.1	19.0	0.0	19.7	19.8	19.8		
			3	1	0.0	17.2	17.0	17.2	1.0	23.3	23.3	23.2	0.0	19.2	19.2	19.2	0.0	19.7	19.6	19.7		
3	3		0.0	17.1	17.1	17.1	1.0	23.2	23.3	23.2	0.0	19.3	19.3	19.3	0.0	19.8	19.7	19.7				
6	0		0.0	17.0	17.2	17.0	2.0	22.1	22.1	22.2	0.0	19.2	19.3	19.3	0.0	19.7	19.7	19.6				
1	0		0.0	17.2	17.2	17.2	2.0	22.3	22.1	22.2	0.5	18.2	18.2	18.3	0.0	19.8	19.6	19.8				
64QAM	1	3	0.0	17.2	17.2	17.0	2.0	22.2	22.2	22.2	0.5	18.2	18.1	18.2	0.0	19.7	19.7	19.7				
	1	5	0.0	17.2	17.2	17.1	2.0	22.1	22.2	22.2	0.5	18.3	18.2	18.2	0.0	19.7	19.7	19.8				
	3	0	0.0	17.1	17.1	17.2	2.0	22.1	22.1	22.2	0.5	18.1	18.1	18.3	0.0	19.7	19.7	19.6				
	3	1	0.0	17.2	17.2	17.2	2.0	22.3	22.1	22.2	0.5	18.1	18.1	18.3	0.0	19.7	19.7	19.8				
	3	3	0.0	17.2	17.2	17.1	2.0	22.2	22.3	22.2	0.5	18.3	18.2	18.2	0.0	19.6	19.7	19.7				
	6	0	0.0	17.2	17.2	17.2	3.0	21.2	21.3	21.2	1.5	17.2	17.3	17.2	0.0	19.7	19.7	19.7				

LTE Band 26 (Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A						MODE B									
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						819 MHz	831.5 MHz	844 MHz		819 MHz	831.5 MHz	844 MHz		819 MHz	831.5 MHz	844 MHz		819 MHz	831.5 MHz	844 MHz
LTE Band 26	Max Power (dBm)					23.3				24.8				23.3				24.8		
	10	QPSK	1	0	0	23.3	23.1	23.2	0	24.8	24.8	24.8	0	23.3	23.1	23.2	0	24.8	24.8	24.8
			1	24	0	23.3	23.3	23.3	0	24.8	24.8	24.8	0	23.3	23.3	23.3	0	24.8	24.8	24.8
			1	49	0	23.2	23.2	23.3	0	24.8	24.7	24.8	0	23.2	23.2	23.3	0	24.8	24.7	24.8
			25	0	1	22.3	22.2	22.3	1	23.7	23.7	23.8	1	22.3	22.2	22.3	1	23.7	23.7	23.8
			25	12	1	22.3	22.3	22.3	1	23.8	23.8	23.8	1	22.3	22.3	22.3	1	23.8	23.8	23.8
			25	24	1	22.3	22.3	22.3	1	23.8	23.8	23.7	1	22.3	22.3	22.3	1	23.8	23.8	23.7
		64QAM	50	0	1	22.3	22.3	22.3	1	23.8	23.8	23.8	1	22.3	22.3	22.3	1	23.8	23.8	23.8
		1	0	1	22.3	22.1	22.1	1	23.6	23.8	23.8	1	22.3	22.1	22.1	1	23.6	23.8	23.8	
		1	24	1	22.2	22.1	22.2	1	23.7	23.6	23.6	1	22.2	22.1	22.2	1	23.7	23.6	23.6	
		1	49	1	22.3	22.2	22.3	1	23.8	23.7	23.6	1	22.3	22.2	22.3	1	23.8	23.7	23.6	
		25	0	2	21.2	21.2	21.3	2	22.6	22.7	22.8	2	21.2	21.2	21.3	2	22.6	22.7	22.8	
		25	12	2	21.3	21.2	21.2	2	22.7	22.7	22.7	2	21.3	21.2	21.2	2	22.7	22.7	22.7	
		25	24	2	21.2	21.2	21.2	2	22.7	22.7	22.6	2	21.2	21.2	21.2	2	22.7	22.7	22.6	
		50	0	2	21.3	21.3	21.2	2	22.7	22.7	22.6	2	21.3	21.3	21.2	2	22.7	22.7	22.6	
		64QAM	1	0	2	21.3	21.1	21.1	2	22.8	22.8	22.8	2	21.3	21.1	21.1	2	22.8	22.8	22.8
		1	24	2	21.1	21.3	21.2	2	22.7	22.7	22.7	2	21.1	21.3	21.2	2	22.7	22.7	22.7	
		1	49	2	21.1	21.2	21.2	2	22.7	22.8	22.7	2	21.1	21.2	21.2	2	22.7	22.8	22.7	
		25	0	3	20.3	20.2	20.3	3	21.6	21.7	21.7	3	20.3	20.2	20.3	3	21.6	21.7	21.7	
	25	12	3	20.1	20.2	20.2	3	21.8	21.7	21.7	3	20.1	20.2	20.2	3	21.8	21.7	21.7		
	25	24	3	20.3	20.3	20.2	3	21.7	21.7	21.8	3	20.3	20.3	20.2	3	21.7	21.7	21.8		
	50	0	3	20.3	20.2	20.1	3	21.7	21.8	21.8	3	20.3	20.2	20.1	3	21.7	21.8	21.8		
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A						MODE B									
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						816.5 MHz	831.5 MHz	846.5 MHz		816.5 MHz	831.5 MHz	846.5 MHz		816.5 MHz	831.5 MHz	846.5 MHz		816.5 MHz	831.5 MHz	846.5 MHz
LTE Band 26	5	QPSK	1	0	0	23.2	23.1	23.2	0	24.7	24.8	24.7	0	23.2	23.1	23.2	0	24.7	24.8	24.7
			1	12	0	23.3	23.3	23.2	0	24.7	24.7	24.8	0	23.3	23.3	23.2	0	24.7	24.7	24.8
			1	24	0	23.3	23.2	23.1	0	24.7	24.7	24.7	0	23.3	23.2	23.1	0	24.7	24.7	24.7
			12	0	1	22.3	22.2	22.2	1	23.7	23.8	23.7	1	22.3	22.2	22.2	1	23.7	23.8	23.7
			12	7	1	22.3	22.2	22.2	1	23.7	23.7	23.7	1	22.3	22.2	22.2	1	23.7	23.7	23.7
			12	13	1	22.1	22.2	22.2	1	23.7	23.7	23.8	1	22.1	22.2	22.2	1	23.7	23.7	23.8
		16QAM	25	0	1	22.3	22.2	22.3	1	23.7	23.6	23.8	1	22.3	22.2	22.3	1	23.7	23.6	23.8
		1	0	1	22.1	22.3	22.2	1	23.7	23.7	23.7	1	22.1	22.3	22.2	1	23.7	23.7	23.7	
		1	12	1	22.2	22.3	22.3	1	23.7	23.7	23.8	1	22.2	22.3	22.3	1	23.7	23.7	23.8	
		1	24	1	22.3	22.3	22.2	1	23.7	23.6	23.7	1	22.3	22.3	22.2	1	23.7	23.6	23.7	
		12	0	2	21.2	21.2	21.2	2	22.7	22.7	22.8	2	21.2	21.2	21.2	2	22.7	22.7	22.8	
		12	7	2	21.2	21.3	21.2	2	22.6	22.7	22.6	2	21.2	21.3	21.2	2	22.6	22.7	22.6	
		12	13	2	21.1	21.2	21.1	2	22.8	22.8	22.8	2	21.1	21.2	21.1	2	22.8	22.8	22.8	
		25	0	2	21.2	21.2	21.2	2	22.6	22.7	22.7	2	21.2	21.2	21.2	2	22.6	22.7	22.7	
		64QAM	1	0	2	21.2	21.2	21.2	2	22.7	22.7	22.7	2	21.2	21.2	21.2	2	22.7	22.7	22.7
		1	12	2	21.1	21.2	21.2	2	22.7	22.7	22.7	2	21.1	21.2	21.2	2	22.7	22.7	22.7	
		1	24	2	21.3	21.2	21.1	2	22.7	22.7	22.8	2	21.3	21.2	21.1	2	22.7	22.7	22.8	
		12	0	3	20.2	20.3	20.1	3	21.8	21.7	21.7	3	20.2	20.3	20.1	3	21.8	21.7	21.7	
		12	7	3	20.2	20.2	20.3	3	21.8	21.7	21.7	3	20.2	20.2	20.3	3	21.8	21.7	21.7	
		12	13	3	20.2	20.2	20.2	3	21.7	21.8	21.7	3	20.2	20.2	20.2	3	21.7	21.8	21.7	
25	0	3	20.2	20.3	20.3	3	21.6	21.7	21.7	3	20.2	20.3	20.3	3	21.6	21.7	21.7			

LTE Band 26 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A							MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						815.5 MHz	831.5 MHz	847.5 MHz		815.5 MHz	831.5 MHz	847.5 MHz		815.5 MHz	831.5 MHz	847.5 MHz		815.5 MHz	831.5 MHz	847.5 MHz
LTE Band 26	3	QPSK	1	0	0	23.2	23.3	23.3	0	24.7	24.8	24.7	0	23.2	23.3	23.3	0	24.7	24.8	24.7
			1	8	0	23.3	23.2	23.1	0	24.7	24.8	24.7	0	23.3	23.2	23.1	0	24.7	24.8	24.7
			1	14	0	23.2	23.2	23.1	0	24.7	24.6	24.8	0	23.2	23.2	23.1	0	24.7	24.6	24.8
			8	0	1	22.1	22.3	22.3	1	23.8	23.8	23.7	1	22.1	22.3	22.3	1	23.8	23.8	23.7
			8	4	1	22.3	22.2	22.1	1	23.7	23.7	23.7	1	22.3	22.2	22.1	1	23.7	23.7	23.7
			8	7	1	22.3	22.3	22.2	1	23.8	23.7	23.7	1	22.3	22.3	22.2	1	23.8	23.7	23.7
		15	0	1	22.2	22.2	22.2	1	23.8	23.7	23.8	1	22.2	22.2	22.2	1	23.8	23.7	23.8	
		16QAM	1	0	1	22.2	22.2	22.2	1	23.8	23.7	23.8	1	22.2	22.2	22.2	1	23.8	23.7	23.8
			1	8	1	22.3	22.2	22.3	1	23.7	23.7	23.7	1	22.3	22.2	22.3	1	23.7	23.7	23.7
			1	14	1	22.2	22.2	22.1	1	23.7	23.7	23.6	1	22.2	22.2	22.1	1	23.7	23.7	23.6
			8	0	2	21.2	21.3	21.2	2	22.7	22.7	22.8	2	21.2	21.3	21.2	2	22.7	22.7	22.8
			8	4	2	21.2	21.3	21.2	2	22.7	22.8	22.7	2	21.2	21.3	21.2	2	22.7	22.8	22.7
			8	7	2	21.2	21.1	21.2	2	22.7	22.7	22.7	2	21.2	21.1	21.2	2	22.7	22.7	22.7
		15	0	2	21.2	21.1	21.2	2	22.7	22.6	22.7	2	21.2	21.1	21.2	2	22.7	22.6	22.7	
		64QAM	1	0	2	21.2	21.3	21.3	2	22.6	22.6	22.7	2	21.2	21.3	21.3	2	22.6	22.6	22.7
			1	8	2	21.1	21.3	21.2	2	22.7	22.7	22.7	2	21.1	21.3	21.2	2	22.7	22.7	22.7
			1	14	2	21.2	21.3	21.3	2	22.6	22.7	22.8	2	21.2	21.3	21.3	2	22.6	22.7	22.8
			8	0	3	20.3	20.2	20.2	3	21.8	21.7	21.8	3	20.3	20.2	20.2	3	21.8	21.7	21.8
			8	4	3	20.2	20.2	20.2	3	21.7	21.8	21.8	3	20.2	20.2	20.2	3	21.7	21.8	21.8
			8	7	3	20.2	20.2	20.2	3	21.7	21.7	21.8	3	20.2	20.2	20.2	3	21.7	21.7	21.8
			15	0	3	20.2	20.2	20.3	3	21.6	21.6	21.8	3	20.2	20.2	20.3	3	21.6	21.6	21.8
LTE Band 26	1.4		QPSK	1	0	0	23.2	23.1	23.2	0	24.7	24.7	24.7	0	23.2	23.1	23.2	0	24.7	24.7
		1		3	0	23.2	23.3	23.3	0	24.7	24.8	24.7	0	23.2	23.3	23.3	0	24.7	24.8	24.7
		1		5	0	23.3	23.2	23.3	0	24.7	24.7	24.7	0	23.3	23.2	23.3	0	24.7	24.7	24.7
		3		0	0	23.3	23.2	23.2	0	24.7	24.7	24.8	0	23.3	23.2	23.2	0	24.7	24.7	24.8
		3		1	0	23.3	23.2	23.2	0	24.8	24.8	24.7	0	23.3	23.2	23.2	0	24.8	24.8	24.7
		3		3	0	23.3	23.2	23.1	0	24.8	24.7	24.7	0	23.3	23.2	23.1	0	24.8	24.7	24.7
		16QAM	6	0	1	22.1	22.2	22.2	1	23.7	23.6	23.7	1	22.1	22.2	22.2	1	23.7	23.6	23.7
			1	0	1	22.2	22.2	22.2	1	23.7	23.7	23.6	1	22.2	22.2	22.2	1	23.7	23.7	23.6
			1	3	1	22.3	22.3	22.2	1	23.7	23.7	23.6	1	22.3	22.3	22.2	1	23.7	23.7	23.6
			1	5	1	22.2	22.2	22.3	1	23.7	23.6	23.8	1	22.2	22.2	22.3	1	23.7	23.6	23.8
			3	0	1	22.1	22.2	22.3	1	23.8	23.7	23.6	1	22.1	22.2	22.3	1	23.8	23.7	23.6
			3	1	1	22.2	22.2	22.2	1	23.6	23.7	23.7	1	22.2	22.2	22.2	1	23.6	23.7	23.7
		64QAM	3	3	1	22.2	22.1	22.2	1	23.8	23.8	23.7	1	22.2	22.1	22.2	1	23.8	23.8	23.7
			6	0	2	21.3	21.3	21.3	2	22.6	22.7	22.7	2	21.3	21.3	21.3	2	22.6	22.7	22.7
			1	0	2	21.2	21.2	21.3	2	22.8	22.8	22.8	2	21.2	21.2	21.3	2	22.8	22.8	22.8
			1	3	2	21.2	21.2	21.2	2	22.7	22.8	22.8	2	21.2	21.2	21.2	2	22.7	22.8	22.8
			1	5	2	21.1	21.3	21.3	2	22.7	22.7	22.6	2	21.1	21.3	21.3	2	22.7	22.7	22.6
			3	0	2	21.1	21.3	21.2	2	22.7	22.7	22.8	2	21.1	21.3	21.2	2	22.7	22.7	22.8
			3	1	2	21.3	21.2	21.2	2	22.8	22.7	22.6	2	21.3	21.2	21.2	2	22.8	22.7	22.6
			3	3	2	21.1	21.2	21.2	2	22.7	22.6	22.8	2	21.1	21.2	21.2	2	22.7	22.6	22.8
			6	0	3	20.2	20.2	20.2	3	21.8	21.8	21.7	3	20.2	20.2	20.2	3	21.8	21.8	21.7

LTE Band 30 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A						MODE B								
					Target MPR	UAT 1		Target MPR	LAT 1		Target MPR	UAT 1		Target MPR	LAT 1				
							2310 MHz			2310 MHz			2310 MHz			2310 MHz			
LTE Band 30	Max Power (dBm)				16.5			23.8			18.5			21.8					
	10	QPSK	1	0	0.0		16.5		0.0		23.8		0.0		18.1		0.0		21.8
			1	24	0.0		16.5		0.0		23.8		0.0		18.1		0.0		21.8
			1	49	0.0		16.5		0.0		23.7		0.0		18.0		0.0		21.8
			25	0	0.0		16.4		1.0		22.8		0.0		18.1		0.0		21.8
			25	12	0.0		16.5		1.0		22.8		0.0		18.1		0.0		21.8
			25	24	0.0		16.4		1.0		22.8		0.0		18.1		0.0		21.8
		50	0	0.0		16.5		1.0		22.8		0.0		18.1		0.0		21.8	
		16QAM	1	0	0.0		16.4		1.0		22.8		0.0		18.1		0.0		21.8
			1	24	0.0		16.5		1.0		22.7		0.0		18.2		0.0		21.8
			1	49	0.0		16.4		1.0		22.7		0.0		18.1		0.0		21.8
			25	0	0.0		16.5		2.0		21.7		0.7		17.5		0.0		21.8
			25	12	0.0		16.4		2.0		21.7		0.7		17.5		0.0		21.7
			25	24	0.0		16.5		2.0		21.6		0.7		17.6		0.0		21.7
		50	0	0.0		16.4		2.0		21.8		0.7		17.6		0.0		21.8	
		64QAM	1	0	0.0		16.5		2.0		21.7		0.7		17.5		0.0		21.8
			1	24	0.0		16.4		2.0		21.7		0.7		17.5		0.0		21.8
			1	49	0.0		16.5		2.0		21.8		0.7		17.5		0.0		21.8
			25	0	0.0		16.5		3.0		20.8		1.7		16.6		1.0		21.8
	25		12	0.0		16.5		3.0		20.8		1.7		16.6		1.0		20.8	
	25		24	0.0		16.4		3.0		20.7		1.7		16.5		1.0		20.8	
	50		0	0.0		16.4		3.0		20.7		1.7		16.7		1.0		20.7	
LTE Band 30	5	QPSK	1	0	0.0		16.5		0.0		23.8		0.0		18.2		0.0		21.8
			1	12	0.0		16.5		0.0		23.8		0.0		18.1		0.0		21.8
			1	24	0.0		16.5		0.0		23.8		0.0		18.1		0.0		21.8
			12	0	0.0		16.5		1.0		22.8		0.0		18.1		0.0		21.7
			12	7	0.0		16.5		1.0		22.8		0.0		18.2		0.0		21.8
			12	13	0.0		16.4		1.0		22.6		0.0		18.2		0.0		21.8
			25	0	0.0		16.5		1.0		22.6		0.0		18.2		0.0		21.7
		16QAM	1	0	0.0		16.4		1.0		22.8		0.0		18.2		0.0		21.8
			1	12	0.0		16.5		1.0		22.8		0.0		18.1		0.0		21.7
			1	24	0.0		16.4		1.0		22.7		0.0		18.1		0.0		21.8
			12	0	0.0		16.5		2.0		21.8		0.7		17.6		0.0		21.8
			12	7	0.0		16.5		2.0		21.8		0.7		17.6		0.0		21.8
			12	13	0.0		16.5		2.0		21.6		0.7		17.6		0.0		21.7
			25	0	0.0		16.4		2.0		21.6		0.7		17.5		0.0		21.8
		64QAM	1	0	0.0		16.5		2.0		21.8		0.7		17.6		0.0		21.8
			1	12	0.0		16.5		2.0		21.8		0.7		17.6		0.0		21.7
			1	24	0.0		16.5		2.0		21.7		0.7		17.6		0.0		21.8
			12	0	0.0		16.4		3.0		20.8		1.7		16.7		1.0		20.8
			12	7	0.0		16.5		3.0		20.8		1.7		16.7		1.0		20.8
			12	13	0.0		16.5		3.0		20.6		1.7		16.6		1.0		20.6
			25	0	0.0		16.4		3.0		20.6		1.7		16.6		1.0		20.6

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 66 Average Power (dBm) Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A							MODE B									
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1			
						1720 MHz	1745 MHz	1770 MHz		1720 MHz	1745 MHz	1770 MHz		1720 MHz	1745 MHz	1770 MHz		1720 MHz	1745 MHz	1770 MHz	
LTE Band 66	Max Power (dBm)				18.0				24.8				18.8				20.3				
	20	QPSK	1	0	0.0	17.4	17.5	17.4	0.0	23.6	23.7	23.6	0.0	18.5	18.5	18.5	0.0	20.0	20.0	19.9	
			1	49	0.0	17.5	17.5	17.5	0.0	24.6	24.7	24.5	0.0	18.5	18.5	18.5	0.0	20.0	20.0	20.0	
			1	99	0.0	17.5	17.5	17.5	0.0	24.6	24.6	24.6	0.0	18.5	18.5	18.5	0.0	20.0	20.0	19.9	
			50	0	0.0	17.5	17.4	17.5	1.0	23.6	23.6	23.6	0.0	18.5	18.5	18.5	0.0	20.0	19.8	20.0	
			50	24	0.0	17.5	17.5	17.5	1.0	23.6	23.7	23.5	0.0	18.5	18.5	18.5	0.0	20.0	20.0	20.0	
			50	49	0.0	17.4	17.5	17.5	1.0	23.7	23.7	23.6	0.0	18.5	18.4	18.4	0.0	20.0	20.0	20.0	
		100	0	0.0	17.5	17.5	17.5	1.0	23.6	23.7	23.5	0.0	18.5	18.5	18.5	0.0	20.0	20.0	20.0		
		16QAM	1	0	0.0	17.5	17.5	17.5	1.0	23.6	23.7	23.7	0.0	18.5	18.5	18.4	0.0	19.8	20.0	19.9	
			1	49	0.0	17.4	17.5	17.5	1.0	23.6	23.6	23.6	0.0	18.3	18.4	18.3	0.0	19.9	20.0	19.9	
			1	99	0.0	17.4	17.5	17.4	1.0	23.6	23.7	23.6	0.0	18.5	18.4	18.5	0.0	19.9	20.0	19.9	
			50	0	0.0	17.4	17.5	17.4	2.0	22.6	22.7	22.7	0.0	18.4	18.4	18.5	0.0	19.9	19.8	20.0	
			50	24	0.0	17.5	17.4	17.4	2.0	22.6	22.6	22.7	0.0	18.5	18.5	18.4	0.0	19.9	19.8	20.0	
			50	49	0.0	17.5	17.4	17.5	2.0	22.6	22.6	22.6	0.0	18.4	18.4	18.5	0.0	19.9	20.0	20.0	
		64QAM	1	0	0.0	17.5	17.5	17.5	2.0	22.7	22.7	22.7	0.0	18.5	18.4	18.4	0.0	20.0	19.9	19.8	
			1	49	0.0	17.4	17.5	17.4	2.0	22.6	22.6	22.7	0.0	18.4	18.4	18.5	0.0	19.9	19.9	19.8	
			1	99	0.0	17.4	17.4	17.5	2.0	22.7	22.7	22.7	0.0	18.5	18.5	18.4	0.0	19.8	20.0	19.8	
			50	0	0.2	17.1	17.3	17.3	3.0	21.5	21.6	21.6	1.0	17.3	17.4	17.4	0.0	19.9	19.9	20.0	
			50	24	0.2	17.2	17.2	17.3	3.0	21.6	21.7	21.5	1.0	17.4	17.5	17.4	0.0	19.8	19.9	19.9	
	50		49	0.2	17.3	17.2	17.3	3.0	21.5	21.7	21.7	1.0	17.4	17.4	17.4	0.0	20.0	19.8	19.9		
				100	0	0.2	17.3	17.3	17.2	3.0	21.6	21.7	21.6	1.0	17.4	17.3	17.4	0.0	19.9	20.0	19.8
	Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A							MODE B								
Target MPR						UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1			
						1717.5 MHz	1745 MHz	1772.5 MHz		1717.5 MHz	1745 MHz	1772.5 MHz		1717.5 MHz	1745 MHz	1772.5 MHz		1717.5 MHz	1745 MHz	1772.5 MHz	
LTE Band 66	15	QPSK	1	0	0.0	17.4	17.4	17.4	0.0	24.5	24.8	24.5	0.0	18.5	18.5	18.4	0.0	19.8	19.9	19.8	
			1	36	0.0	17.4	17.4	17.4	0.0	24.8	24.7	24.6	0.0	18.4	18.4	18.4	0.0	19.9	19.9	19.9	
			1	74	0.0	17.4	17.5	17.5	0.0	24.6	24.7	24.7	0.0	18.5	18.4	18.5	0.0	19.9	20.0	19.9	
			36	0	0.0	17.5	17.4	17.4	1.0	23.7	23.6	23.7	0.0	18.4	18.3	18.4	0.0	20.0	19.9	19.9	
			36	18	0.0	17.5	17.4	17.5	1.0	23.6	23.6	23.7	0.0	18.5	18.4	18.5	0.0	19.9	19.9	19.8	
			36	37	0.0	17.5	17.5	17.4	1.0	23.7	23.7	23.6	0.0	18.4	18.4	18.4	0.0	19.9	19.9	19.9	
		16QAM	75	0	0.0	17.4	17.4	17.4	1.0	23.6	23.6	23.7	0.0	18.5	18.4	18.5	0.0	19.8	20.0	19.9	
			1	0	0.0	17.4	17.4	17.4	1.0	23.6	23.6	23.6	0.0	18.5	18.4	18.4	0.0	19.8	19.9	19.9	
			1	36	0.0	17.4	17.4	17.5	1.0	23.6	23.7	23.6	0.0	18.4	18.5	18.5	0.0	20.0	19.9	19.8	
			1	74	0.0	17.5	17.5	17.5	1.0	23.6	23.6	23.6	0.0	18.4	18.4	18.5	0.0	19.9	19.8	19.8	
			36	0	0.0	17.5	17.5	17.5	2.0	22.7	22.6	22.6	0.0	18.3	18.3	18.5	0.0	20.0	20.0	19.8	
			36	18	0.0	17.5	17.4	17.5	2.0	22.6	22.7	22.7	0.0	18.5	18.5	18.4	0.0	19.9	20.0	19.8	
		64QAM	36	37	0.0	17.4	17.5	17.5	2.0	22.7	22.7	22.7	0.0	18.5	18.4	18.4	0.0	19.9	19.9	19.9	
			75	0	0.0	17.4	17.5	17.4	2.0	22.7	22.7	22.7	0.0	18.4	18.4	18.5	0.0	19.9	19.8	19.9	
			1	0	0.0	17.4	17.5	17.4	2.0	22.7	22.7	22.6	0.0	18.4	18.4	18.5	0.0	19.8	19.9	19.8	
			1	36	0.0	17.4	17.4	17.5	2.0	22.7	22.6	22.6	0.0	18.4	18.4	18.4	0.0	19.9	20.0	19.9	
			1	74	0.0	17.4	17.5	17.5	2.0	22.7	22.7	22.6	0.0	18.3	18.4	18.4	0.0	19.9	19.9	19.8	
			36	0	0.2	17.2	17.3	17.3	3.0	21.6	21.6	21.6	1.0	17.3	17.5	17.5	0.0	19.9	19.9	20.0	
		64QAM	36	18	0.2	17.2	17.2	17.2	3.0	21.7	21.7	21.6	1.0	17.4	17.4	17.4	0.0	20.0	20.0	19.9	
			36	37	0.2	17.3	17.2	17.2	3.0	21.5	21.5	21.5	1.0	17.5	17.5	17.4	0.0	19.9	19.9	19.9	
			75	0	0.2	17.3	17.2	17.2	3.0	21.6	21.7	21.6	1.0	17.4	17.4	17.3	0.0	19.9	19.8	20.0	


LTE Band 66 Average Power (dBm) Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A							MODE B								
					Target MPR	UAT 1			Target MPR	LAT 1			Target MPR	UAT 1			Target MPR	LAT 1		
						1715 MHz	1745 MHz	1775 MHz		1715 MHz	1745 MHz	1775 MHz		1715 MHz	1745 MHz	1775 MHz		1715 MHz	1745 MHz	1775 MHz
LTE Band 66	10	QPSK	1	0	0.0	17.4	17.5	17.4	0.0	24.7	24.6	24.7	0.0	18.5	18.5	18.4	0.0	19.9	20.0	20.0
			1	24	0.0	17.4	17.5	17.5	0.0	24.8	24.7	24.6	0.0	18.4	18.5	18.5	0.0	19.9	20.0	20.0
			1	49	0.0	17.5	17.4	17.4	0.0	24.8	24.6	24.5	0.0	18.5	18.4	18.4	0.0	20.0	19.9	19.8
			25	0	0.0	17.5	17.4	17.5	10	23.6	23.6	23.7	0.0	18.5	18.5	18.5	0.0	19.9	20.0	19.9
			25	12	0.0	17.5	17.5	17.5	10	23.6	23.6	23.7	0.0	18.4	18.5	18.4	0.0	19.9	20.0	19.9
			25	24	0.0	17.4	17.4	17.4	10	23.7	23.6	23.7	0.0	18.4	18.5	18.5	0.0	19.9	19.9	19.8
		16QAM	50	0	0.0	17.5	17.4	17.4	10	23.6	23.6	23.6	0.0	18.4	18.5	18.5	0.0	19.8	19.8	20.0
			1	0	0.0	17.5	17.4	17.5	10	23.7	23.6	23.6	0.0	18.5	18.4	18.5	0.0	19.8	20.0	19.8
			1	24	0.0	17.5	17.5	17.4	10	23.7	23.7	23.7	0.0	18.5	18.5	18.4	0.0	19.8	19.9	19.9
			1	49	0.0	17.5	17.4	17.4	10	23.6	23.6	23.6	0.0	18.5	18.4	18.4	0.0	19.9	20.0	19.9
			25	0	0.0	17.4	17.5	17.4	2.0	22.7	22.7	22.7	0.0	18.4	18.5	18.5	0.0	19.8	19.8	19.8
			25	12	0.0	17.5	17.5	17.4	2.0	22.6	22.6	22.6	0.0	18.5	18.5	18.4	0.0	19.9	19.8	19.9
		64QAM	25	24	0.0	17.5	17.5	17.4	2.0	22.7	22.6	22.6	0.0	18.4	18.4	18.4	0.0	19.8	19.8	19.9
			50	0	0.0	17.4	17.4	17.4	2.0	22.7	22.6	22.6	0.0	18.4	18.5	18.5	0.0	20.0	19.9	19.9
			1	0	0.0	17.5	17.4	17.5	2.0	22.7	22.7	22.7	0.0	18.5	18.4	18.5	0.0	19.9	19.9	20.0
			1	24	0.0	17.4	17.4	17.5	2.0	22.7	22.6	22.7	0.0	18.5	18.4	18.5	0.0	19.8	20.0	19.9
			1	49	0.0	17.5	17.5	17.5	2.0	22.7	22.6	22.6	0.0	18.5	18.5	18.4	0.0	20.0	19.9	19.8
			25	0	0.2	17.3	17.2	17.2	3.0	21.7	21.6	21.5	10	17.5	17.4	17.4	0.0	19.9	19.9	19.9
			25	12	0.2	17.3	17.3	17.3	3.0	21.6	21.7	21.6	10	17.4	17.4	17.5	0.0	19.8	19.8	19.9
			25	24	0.2	17.2	17.2	17.2	3.0	21.6	21.5	21.5	10	17.4	17.4	17.4	0.0	20.0	20.0	19.9
			50	0	0.2	17.3	17.2	17.2	3.0	21.6	21.5	21.6	10	17.5	17.3	17.5	0.0	20.0	19.8	20.0
Band	BW (MHz)		Mode	RB Allocation	RB offset	MODE A							MODE B							
						Target MPR	1712.5 MHz	1745 MHz	1777.5 MHz	Target MPR	1712.5 MHz	1745 MHz	1777.5 MHz	Target MPR	1712.5 MHz	1745 MHz	1777.5 MHz	Target MPR	1712.5 MHz	1745 MHz
LTE Band 66	5	QPSK	1	0	0.0	17.4	17.5	17.5	0.0	24.7	24.6	24.6	0.0	18.4	18.4	18.5	0.0	20.0	20.0	19.9
			1	12	0.0	17.4	17.4	17.4	0.0	24.6	24.7	24.5	0.0	18.5	18.5	18.5	0.0	19.9	19.9	19.8
			1	24	0.0	17.5	17.4	17.4	0.0	24.7	24.8	24.7	0.0	18.4	18.5	18.5	0.0	20.0	19.9	19.8
			12	0	0.0	17.5	17.4	17.4	10	23.7	23.6	23.7	0.0	18.5	18.5	18.5	0.0	19.8	19.9	19.8
			12	7	0.0	17.4	17.4	17.4	10	23.6	23.6	23.7	0.0	18.4	18.5	18.4	0.0	19.9	19.9	19.9
			12	13	0.0	17.5	17.4	17.5	10	23.7	23.6	23.7	0.0	18.4	18.4	18.4	0.0	19.9	19.8	20.0
		16QAM	25	0	0.0	17.4	17.4	17.5	10	23.7	23.7	23.7	0.0	18.5	18.4	18.5	0.0	19.9	19.9	19.9
			1	0	0.0	17.4	17.5	17.4	10	23.6	23.6	23.6	0.0	18.5	18.5	18.5	0.0	19.9	19.8	19.9
			1	12	0.0	17.4	17.5	17.5	10	23.7	23.6	23.7	0.0	18.3	18.5	18.4	0.0	20.0	20.0	19.8
			1	24	0.0	17.4	17.5	17.4	10	23.7	23.7	23.6	0.0	18.5	18.5	18.4	0.0	19.9	19.8	19.9
			12	0	0.0	17.4	17.4	17.4	2.0	22.6	22.6	22.7	0.0	18.5	18.5	18.4	0.0	19.9	19.9	19.8
			12	7	0.0	17.5	17.4	17.5	2.0	22.6	22.6	22.7	0.0	18.4	18.5	18.5	0.0	19.8	20.0	20.0
		64QAM	12	13	0.0	17.5	17.4	17.5	2.0	22.6	22.7	22.6	0.0	18.5	18.5	18.5	0.0	19.9	19.9	19.8
			25	0	0.0	17.5	17.4	17.5	2.0	22.7	22.7	22.7	0.0	18.4	18.5	18.4	0.0	19.9	19.8	19.8
			1	0	0.0	17.4	17.4	17.4	2.0	22.7	22.7	22.6	0.0	18.5	18.5	18.5	0.0	19.9	19.9	19.9
			1	12	0.0	17.5	17.5	17.4	2.0	22.7	22.6	22.7	0.0	18.4	18.5	18.5	0.0	20.0	19.9	19.9
			1	24	0.0	17.5	17.4	17.5	2.0	22.7	22.6	22.6	0.0	18.4	18.4	18.5	0.0	19.8	19.9	19.9
			12	0	0.2	17.2	17.2	17.3	3.0	21.6	21.5	21.7	10	17.4	17.4	17.5	0.0	19.9	20.0	19.9
			12	7	0.2	17.3	17.2	17.2	3.0	21.7	21.7	21.7	10	17.5	17.5	17.5	0.0	19.8	19.9	19.8
			12	13	0.2	17.3	17.3	17.3	3.0	21.6	21.7	21.7	10	17.5	17.4	17.4	0.0	19.8	19.9	19.9
			25	0	0.2	17.2	17.3	17.2	3.0	21.6	21.6	21.7	10	17.3	17.5	17.4	0.0	19.9	19.8	19.9


LTE TDD Band Measured Results**Procedure used to establish SAR test signal for LTE TDD Band**

Set to CMW-500 with following parameters:

- Turn the LTE Signaling off using “ON | OFF” key
- Operating Band: Select Band and TDD
- Go to “Config....”

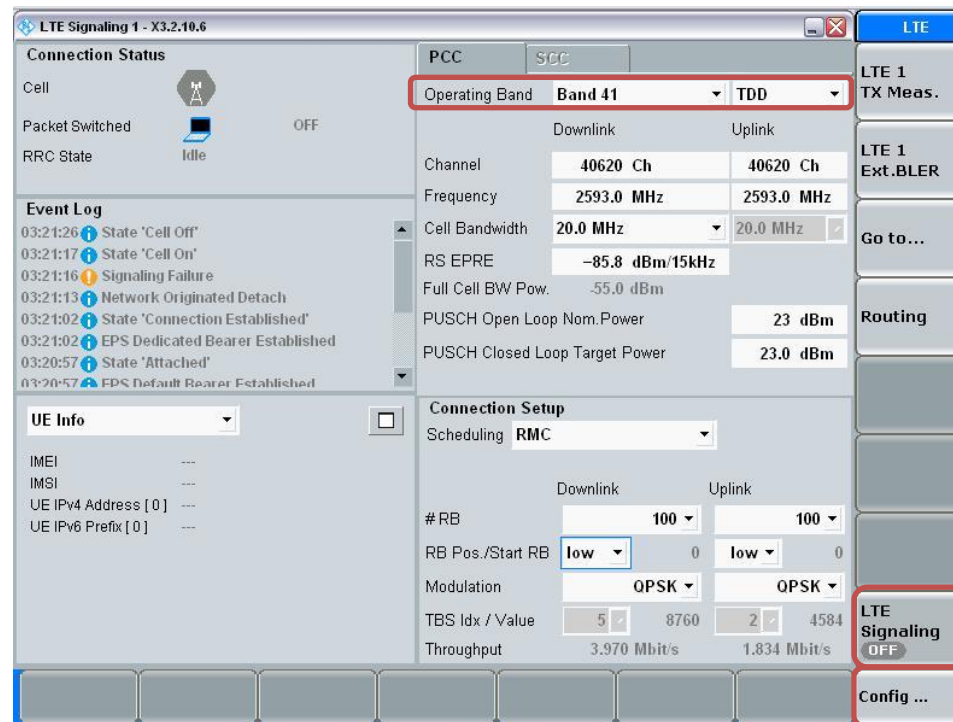


- Go to "Physical Cell Setup"
- Select "TDD" and Set "Uplink Downlink Configuration" to "0"
- Turn the cell on using "ON | OFF" key

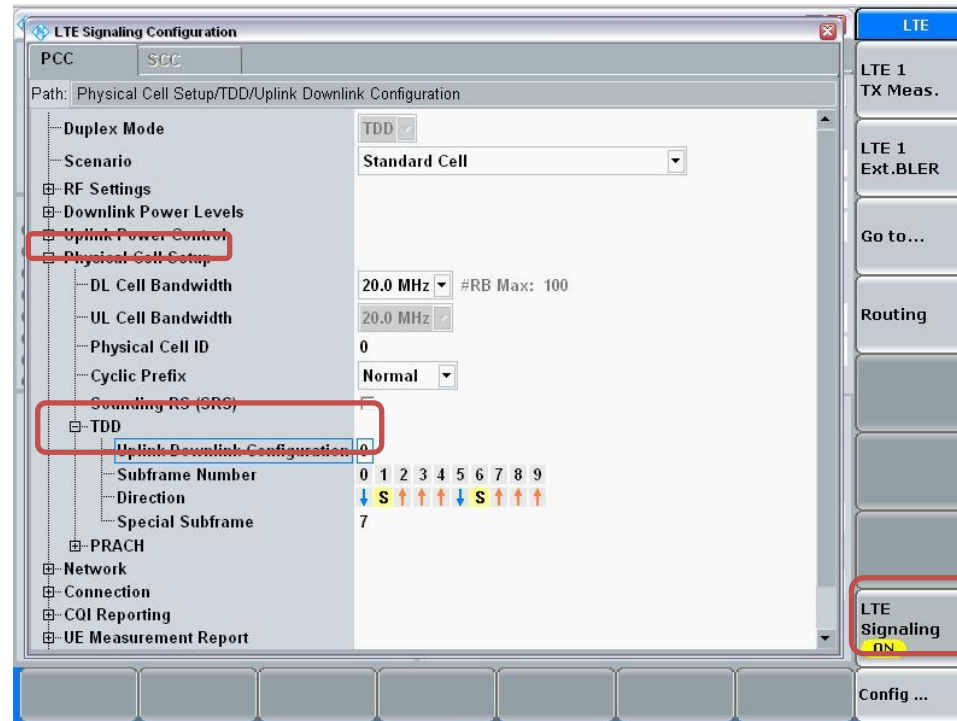


Connect to EUT

- Turn the cell on using “ON | OFF” key
- After EUT is Attached
- Select “Connect”

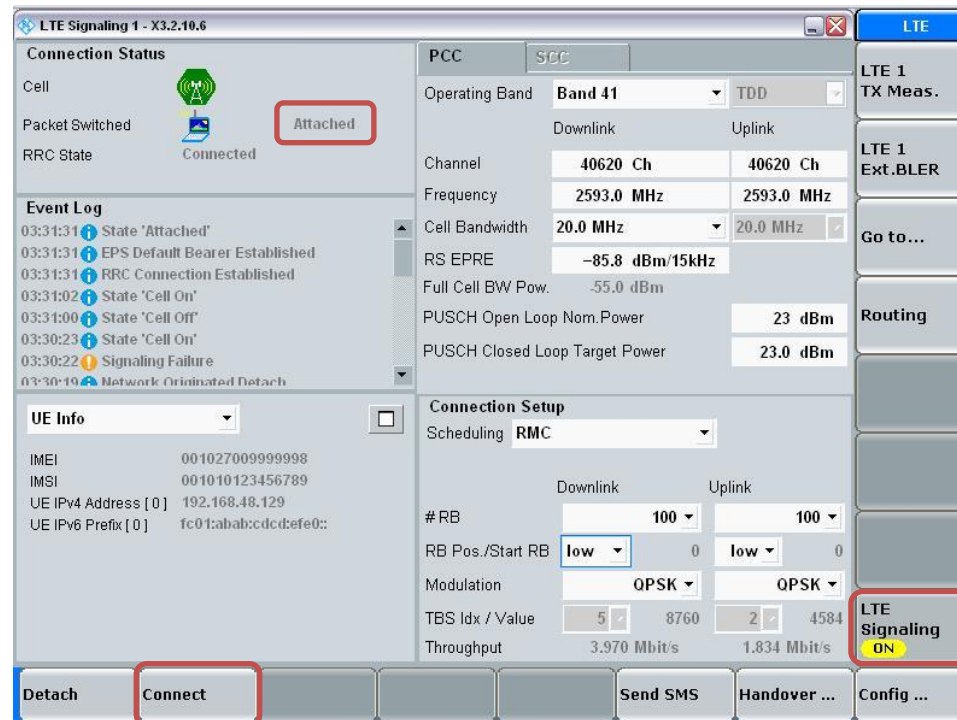


Max Power Setting

- Select “LTE 1 TX Meas.”
- Press “RESTART | STOP” Soft key

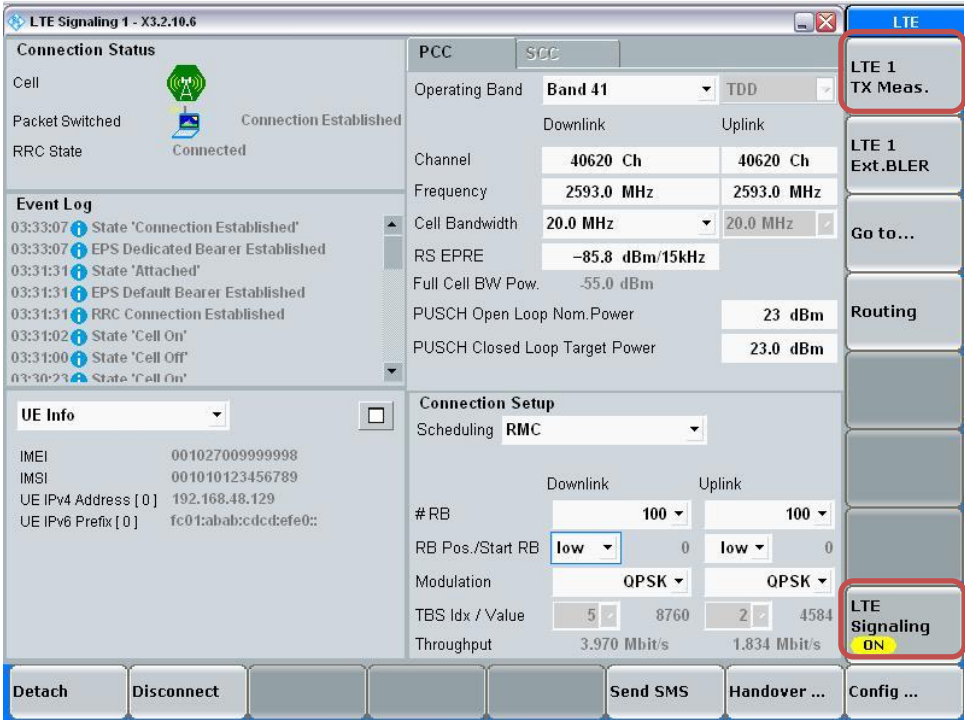


- Select “Signaling Parameter”
- Select “TX Power Control (TPC)” > Select “Active TPC Setup” to “Max Power” > Set “Closed Loop Target Power” to “23 dBm”

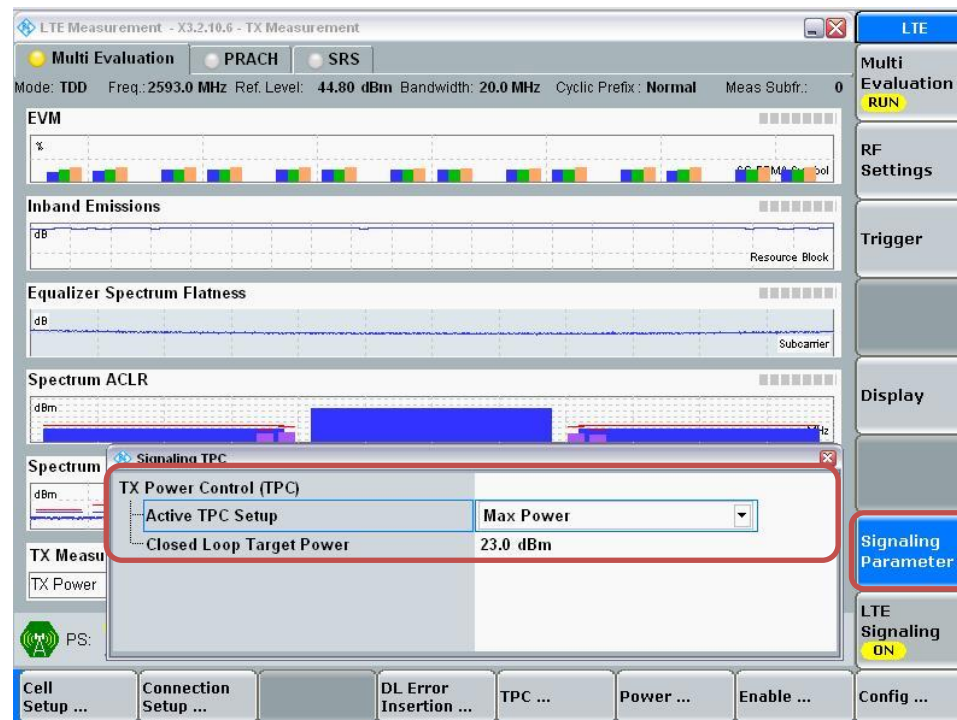

View TX Power

- Go to “Display”
- Select “Select View...”
- Select “Spectrum Emission Mask”

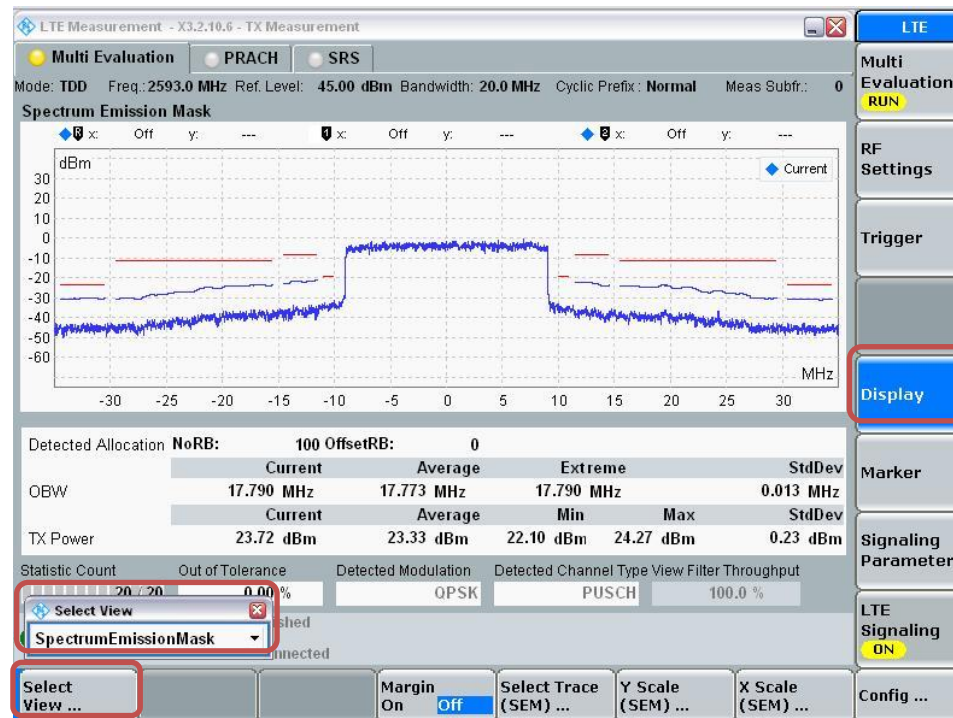

LTE Band 41 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A										MODE B													
					Target MPR	UAT 1				Target MPR	LAT 1				Target MPR	UAT 1				Target MPR	LAT 1							
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz		2680 MHz	2506 MHz	2549.5 MHz	2593 MHz		2636.5 MHz	2680 MHz	2506 MHz	2549.5 MHz		2593 MHz	2636.5 MHz	2680 MHz					
LTE Band 41	Max Power (dBm)				17.3						25.3						20.0						20.5					
	QPSK	1	0	0.0	17.2	17.2	17.1	17.0	17.1	0.0	25.3	25.3	25.2	25.2	25.3	0.0	20.0	20.0	20.0	20.0	19.9	0.0	20.0	19.9	19.9	20.0	20.0	
		1	49	0.0	17.3	17.2	17.1	17.1	17.1	0.0	25.3	25.3	25.3	25.2	25.3	0.0	20.0	20.0	20.0	20.0	20.0	0.0	20.0	20.0	20.0	20.0	20.0	
		1	99	0.0	17.2	17.2	17.1	17.0	17.1	0.0	25.2	25.2	25.3	25.2	25.3	0.0	20.0	20.0	20.0	20.0	19.9	0.0	19.9	20.0	20.0	20.0	20.0	
		50	0	0.0	17.3	17.2	17.3	17.2	17.1	1.0	24.3	24.3	24.3	24.3	24.3	0.7	19.3	19.3	19.2	19.3	19.2	0.0	20.0	19.9	20.0	20.0	19.9	
		50	24	0.0	17.3	17.2	17.2	17.2	17.2	1.0	24.3	24.2	24.2	24.3	24.3	0.7	19.2	19.2	19.2	19.2	19.2	0.0	20.0	20.0	20.0	20.0	20.0	
		50	49	0.0	17.3	17.2	17.3	17.2	17.3	1.0	24.3	24.3	24.3	24.3	24.2	0.7	19.3	19.3	19.2	19.2	19.3	0.0	20.0	20.0	20.0	19.9	20.0	
		100	0	0.0	17.2	17.2	17.2	17.2	17.2	1.0	24.3	24.2	24.3	24.3	24.2	0.7	19.2	19.1	19.2	19.2	19.2	0.0	20.0	20.0	20.0	20.0	20.0	
		16QAM	1	0	0.0	17.2	17.2	17.2	17.3	17.2	1.0	24.3	24.2	24.3	24.3	24.3	0.7	19.2	19.3	19.3	19.3	19.3	0.0	20.0	20.0	20.0	19.9	20.0
			1	49	0.0	17.1	17.3	17.1	17.2	17.2	1.0	24.2	24.2	24.3	24.2	24.3	0.7	19.2	19.3	19.2	19.3	19.2	0.0	19.8	19.8	19.9	19.8	19.8
			1	99	0.0	17.1	17.2	17.2	17.2	17.2	1.0	24.3	24.3	24.2	24.3	24.3	0.7	19.2	19.2	19.3	19.3	19.3	0.0	19.8	19.9	19.8	19.8	19.9
	50		0	0.0	17.2	17.2	17.1	17.2	17.3	2.0	23.2	23.2	23.2	23.3	23.3	1.7	18.2	18.3	18.2	18.3	18.2	0.0	19.7	19.7	19.7	19.7	19.7	
	50		24	0.0	17.1	17.3	17.2	17.1	17.3	2.0	23.2	23.2	23.1	23.2	23.1	1.7	18.2	18.2	18.1	18.2	18.2	0.0	19.7	19.8	19.8	19.7	19.7	
	50		49	0.0	17.2	17.3	17.2	17.3	17.1	2.0	23.1	23.2	23.2	23.2	23.1	1.7	18.1	18.3	18.2	18.1	18.2	0.0	19.6	19.7	19.6	19.6	19.7	
	100		0	0.0	17.2	17.3	17.2	17.3	17.3	2.0	23.2	23.2	23.2	23.1	23.1	1.7	18.3	18.2	18.1	18.2	18.1	0.0	19.6	19.7	19.7	19.6	19.6	
	64QAM		1	0	0.0	17.3	17.3	17.1	17.2	17.2	2.0	23.3	23.2	23.1	23.1	23.2	1.7	18.3	18.3	18.1	18.2	18.3	0.0	19.6	19.7	19.7	19.8	19.7
			1	49	0.0	17.1	17.2	17.3	17.1	17.2	2.0	23.2	23.2	23.1	23.3	23.2	1.7	18.2	18.2	18.2	18.2	18.1	0.0	19.7	19.7	19.9	19.7	19.7
			1	99	0.0	17.3	17.2	17.1	17.1	17.2	2.0	23.2	23.2	23.3	23.3	23.1	1.7	18.1	18.2	18.1	18.2	18.3	0.0	19.7	19.9	19.8	19.9	19.7
		50	0	0.0	17.2	17.1	17.2	17.2	17.3	3.0	22.1	22.3	22.2	22.1	22.2	2.7	17.1	17.3	17.2	17.2	17.3	0.0	19.9	19.6	19.8	19.8	19.9	
		50	24	0.0	17.3	17.2	17.2	17.1	17.2	3.0	22.2	22.2	22.1	22.2	22.2	2.7	17.2	17.3	17.2	17.2	17.1	0.0	19.7	19.7	19.8	19.7	19.8	
		50	49	0.0	17.1	17.2	17.1	17.2	17.2	3.0	22.1	22.3	22.2	22.2	22.2	2.7	17.2	17.1	17.3	17.2	17.3	0.0	19.6	19.7	19.6	19.7	19.7	
	100	0	0.0	17.2	17.2	17.1	17.2	17.2	3.0	22.2	22.2	22.1	22.2	22.2	2.7	17.1	17.3	17.2	17.3	17.2	0.0	19.8	19.7	19.9	19.6	19.7		
	Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A										MODE B												
LTE Band 41	QPSK	1	0	0.0	17.3	17.3	17.2	17.2	17.2	0.0	25.3	25.3	25.2	25.2	25.3	0.0	20.0	20.0	19.9	19.9	20.0	0.0	19.9	19.8	19.9	19.9	19.8	
		1	36	0.0	17.3	17.2	17.3	17.1	17.3	0.0	25.2	25.2	25.3	25.3	25.3	0.0	20.0	20.0	19.9	20.0	19.9	0.0	19.5	19.5	19.5	19.5	19.5	
		1	74	0.0	17.2	17.2	17.2	17.2	17.3	0.0	25.3	25.2	25.3	25.3	25.3	0.0	19.9	19.9	20.0	19.9	20.0	0.0	19.6	19.6	19.7	19.7	19.7	
		36	0	0.0	17.1	17.2	17.3	17.2	17.2	1.0	24.3	24.3	24.3	24.2	24.3	0.7	19.2	19.3	19.2	19.3	19.3	0.0	19.8	19.8	19.8	19.8	19.7	
		36	18	0.0	17.3	17.1	17.2	17.2	17.1	1.0	24.3	24.3	24.3	24.3	24.3	0.7	19.2	19.3	19.2	19.2	19.3	0.0	19.6	19.5	19.5	19.5	19.5	
		36	37	0.0	17.2	17.2	17.2	17.3	17.2	1.0	24.3	24.3	24.3	24.3	24.2	0.7	19.2	19.2	19.3	19.2	19.3	0.0	19.5	19.5	19.6	19.6	19.5	
		75	0	0.0	17.1	17.3	17.1	17.1	17.2	1.0	24.2	24.3	24.3	24.2	24.2	0.7	19.3	19.2	19.3	19.3	19.3	0.0	19.5	19.6	19.5	19.6	19.5	
		16QAM	1	0	0.0	17.2	17.3	17.1	17.2	17.1	1.0	24.3	24.3	24.2	24.2	24.3	0.7	19.2	19.2	19.2	19.3	19.3	0.0	20.0	20.0	20.0	19.9	20.0
			1	36	0.0	17.1	17.3	17.3	17.1	17.1	1.0	24.3	24.2	24.3	24.2	24.3	0.7	19.2	19.3	19.2	19.3	19.3	0.0	19.8	19.8	19.9	19.8	19.8
			1	74	0.0	17.2	17.2	17.2	17.2	17.1	1.0	24.3	24.2	24.2	24.1	24.3	0.7	19.2	19.2	19.2	19.2	19.3	0.0	19.8	19.9	19.8	19.8	19.9
	36		0	0.0	17.3	17.2	17.3	17.2	17.1	2.0	23.2	23.3	23.3	23.2	23.3	1.7	18.2	18.2	18.1	18.2	18.2	0.0	19.8	19.7	19.8	19.8	19.7	
	36		18	0.0	17.2	17.2	17.2	17.2	17.2	2.0	23.2	23.2	23.1	23.2	23.1	1.7	18.3	18.3	18.2	18.2	18.2	0.0	19.7	19.7	19.8	19.8	19.7	
	36		37	0.0	17.2	17.2	17.2	17.1	17.2	2.0	23.1	23.2	23.2	23.2	23.1	1.7	18.2	18.1	18.3	18.3	18.2	0.0	19.6	19.6	19.7	19.7	19.7	
	75		0	0.0	17.3	17.2	17.3	17.2	17.3	2.0	23.3	23.3	23.3	23.1	23.1	1.7	18.2	18.2	18.1	18.2	18.2	0.0	19.6	19.7	19.6	19.7	19.6	
	64QAM		1	0	0.0	17.3	17.2	17.3	17.1	17.2	2.0	23.1	23.2	23.2	23.2	23.2	1.7	18.2	18.3	18.3	18.2	18.3	0.0	19.7	19.6	19.8	19.8	19.8
		1	36	0.0	17.3	17.1	17.2	17.2	17.2	2.0	23.1	23.1	23.2	23.2	23.2	1.7	18.3	18.2	18.1	18.2	18.3	0.0	19.8	19.7	19.8	19.8	19.9	
		1	74	0.0	17.1	17.3	17.3	17.1	17.3	2.0	23.2	23.3	23.2	23.2	23.3	1.7	18.2	18.3	18.2	18.2	18.2	0.0	19.6	19.8	19.8	19.6	19.8	
		36	0	0.0	17.1	17.3	17.1	17.1	17.2	3.0	22.2	22.1	22.2	22.2	22.1	2.7	17.3	17.2	17.2	17.2	17.1	0.0	19.6	19.9	19.8	19.8	19.8	
		36	18	0.0	17.1	17.3	17.2	17.1	17.1	3.0	22.1	22.2	22.1	22.2	22.1	2.7	17.3	17.3	17.2	17.2	17.3	0.0	19.7	19.7	19.8	19.7	19.8	
		36	37	0.0	17.1	17.1	17.3	17.2	17.1	3.0	22.3	22.2	22.1	22.2	22.2	2.7	17.2	17.2	17.2	17.2	17.1	0.0	19.8	19.9	19.7	19.7	19.6	
		75	0	0.0	17.2	17.3	17.2	17.2	17.2	3.0	22.2	22.3	22.2	22.1	22.2	2.7	17.1	17.2	17.1	17.2	17.3	0.0	19.6	19.8	19.8	19.7	19.8	

LTE Band 41 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A										MODE B													
					Target MPR	UAT 1					Target MPR	LAT 1					Target MPR	UAT 1					Target MPR	LAT 1				
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	10	QPSK	1	0	0.0	17.2	17.2	17.2	17.2	17.3	0.0	25.2	25.3	25.2	25.3	25.3	0.0	20.0	20.0	20.0	19.9	20.0	0.0	19.8	19.8	19.9	19.8	19.9
			1	24	0.0	17.1	17.1	17.3	17.2	17.1	0.0	25.3	25.3	25.2	25.3	25.2	0.0	20.0	19.9	19.9	20.0	19.9	0.0	19.5	19.5	19.5	19.5	19.5
			1	49	0.0	17.1	17.2	17.3	17.3	17.2	0.0	25.3	25.2	25.2	25.3	25.3	0.0	19.9	19.9	20.0	20.0	20.0	0.0	19.7	19.8	19.7	19.8	19.8
			25	0	0.0	17.1	17.3	17.3	17.2	17.3	1.0	24.3	24.3	24.3	24.3	24.3	0.7	19.2	19.3	19.3	19.2	19.2	0.0	19.8	19.8	19.8	19.8	19.7
			25	12	0.0	17.1	17.3	17.1	17.3	17.3	1.0	24.2	24.3	24.3	24.3	24.3	0.7	19.3	19.3	19.2	19.3	19.2	0.0	19.6	19.5	19.5	19.5	19.6
			25	24	0.0	17.1	17.1	17.1	17.2	17.1	1.0	24.3	24.3	24.3	24.3	24.2	0.7	19.3	19.3	19.2	19.2	19.3	0.0	19.5	19.6	19.5	19.5	19.5
		50	0	0.0	17.2	17.2	17.3	17.1	17.1	1.0	24.2	24.3	24.3	24.3	24.2	0.7	19.3	19.3	19.3	19.3	19.2	0.0	19.5	19.6	19.5	19.5	19.5	
		1	0	0.0	17.2	17.3	17.2	17.2	17.1	1.0	24.3	24.2	24.3	24.3	24.3	0.7	19.2	19.3	19.2	19.3	19.3	0.0	19.9	20.0	19.9	19.9	20.0	
		1	24	0.0	17.2	17.3	17.2	17.3	17.2	1.0	24.3	24.3	24.2	24.2	24.3	0.7	19.2	19.2	19.2	19.2	19.3	0.0	19.8	19.9	19.8	19.8	19.9	
		1	49	0.0	17.2	17.3	17.3	17.1	17.3	1.0	24.3	24.3	24.2	24.3	24.3	0.7	19.3	19.3	19.3	19.3	19.3	0.0	19.9	19.8	19.9	19.8	19.9	
		25	0	0.0	17.2	17.2	17.1	17.3	17.2	2.0	23.2	23.2	23.2	23.3	23.3	1.7	18.2	18.1	18.3	18.1	18.3	0.0	19.7	19.7	19.7	19.7	19.7	
		25	12	0.0	17.2	17.2	17.1	17.2	17.2	2.0	23.1	23.1	23.2	23.2	23.2	1.7	18.2	18.2	18.2	18.2	18.3	0.0	19.8	19.8	19.7	19.7	19.7	
		25	24	0.0	17.2	17.3	17.2	17.2	17.2	2.0	23.1	23.2	23.2	23.1	23.2	1.7	18.2	18.1	18.1	18.2	18.1	0.0	19.7	19.6	19.7	19.7	19.7	
		50	0	0.0	17.2	17.2	17.1	17.3	17.2	2.0	23.2	23.2	23.2	23.1	23.1	1.7	18.1	18.1	18.2	18.3	18.2	0.0	19.7	19.7	19.7	19.6	19.7	
		1	0	0.0	17.3	17.2	17.3	17.1	17.2	2.0	23.2	23.2	23.2	23.3	23.3	1.7	18.2	18.2	18.3	18.1	18.3	0.0	19.7	19.9	19.7	19.8	19.8	
		1	24	0.0	17.3	17.2	17.1	17.2	17.1	2.0	23.2	23.2	23.3	23.1	23.2	1.7	18.3	18.2	18.1	18.2	18.2	0.0	19.8	19.7	19.6	19.6	19.8	
		1	49	0.0	17.3	17.2	17.2	17.2	17.2	2.0	23.2	23.1	23.2	23.2	23.2	1.7	18.1	18.1	18.2	18.3	18.3	0.0	19.8	19.8	19.8	19.6	19.9	
		25	0	0.0	17.2	17.3	17.2	17.1	17.2	3.0	22.1	22.2	22.2	22.2	22.2	2.7	17.3	17.3	17.2	17.2	17.2	0.0	19.7	19.7	19.7	19.7	19.7	
		25	12	0.0	17.3	17.2	17.2	17.1	17.1	3.0	22.2	22.2	22.2	22.2	22.3	2.7	17.2	17.1	17.3	17.3	17.2	0.0	19.7	19.8	19.8	19.7	19.9	
		25	24	0.0	17.2	17.2	17.2	17.2	17.2	3.0	22.3	22.2	22.3	22.2	22.2	2.7	17.2	17.2	17.1	17.2	17.2	0.0	19.6	19.8	19.7	19.8	19.7	
50	0	0.0	17.3	17.1	17.2	17.3	17.2	3.0	22.1	22.2	22.2	22.2	22.2	2.7	17.2	17.3	17.3	17.2	17.3	0.0	19.7	19.8	19.8	19.8	19.8			
Band	BW (MHz)	Mode	RB Allocation	RB offset	MODE A										MODE B													
					Target MPR	UAT 1					Target MPR	LAT 1					Target MPR	UAT 1					Target MPR	LAT 1				
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
					LTE Band 41	5	QPSK	1	0	0.0	17.3	17.3	17.3	17.2	17.2	0.0	25.3	25.3	25.2	25.2	25.3	0.0	20.0	20.0	20.0	20.0	19.9	0.0
1	12	0.0	17.3	17.2				17.3	17.2	17.3	0.0	25.3	25.3	25.3	25.2	25.3	0.0	20.0	19.9	20.0	20.0	19.9	0.0	19.5	19.5	19.5	19.5	19.5
1	24	0.0	17.2	17.3				17.3	17.3	17.2	0.0	25.2	25.2	25.3	25.3	25.3	0.0	20.0	20.0	20.0	20.0	20.0	0.0	19.8	19.8	19.7	19.7	19.7
12	0	0.0	17.2	17.2				17.2	17.2	17.2	1.0	24.3	24.3	24.3	24.3	24.3	0.7	19.2	19.2	19.3	19.3	19.2	0.0	19.8	19.8	19.8	19.8	19.7
12	7	0.0	17.3	17.2				17.3	17.3	17.3	1.0	24.2	24.2	24.2	24.3	24.3	0.7	19.2	19.3	19.2	19.2	19.3	0.0	19.6	19.5	19.5	19.5	19.5
12	13	0.0	17.1	17.2				17.2	17.3	17.2	1.0	24.3	24.3	24.3	24.3	24.2	0.7	19.2	19.3	19.3	19.2	19.3	0.0	19.5	19.5	19.5	19.5	19.5
25	0	0.0	17.1	17.2			17.2	17.3	17.3	1.0	24.3	24.3	24.2	24.2	24.2	0.7	19.3	19.3	19.2	19.2	19.3	0.0	19.6	19.6	19.5	19.5	19.5	
1	0	0.0	17.3	17.1			17.1	17.2	17.2	1.0	24.3	24.2	24.3	24.2	24.3	0.7	19.3	19.3	19.2	19.3	19.2	0.0	20.0	19.9	19.9	19.9	20.0	
1	12	0.0	17.1	17.3			17.3	17.2	17.3	1.0	24.3	24.3	24.2	24.2	24.3	0.7	19.2	19.2	19.3	19.2	19.3	0.0	19.9	19.8	19.8	19.9	19.9	
1	24	0.0	17.1	17.2			17.2	17.2	17.2	1.0	24.3	24.3	24.2	24.3	24.3	0.7	19.2	19.2	19.3	19.2	19.3	0.0	19.8	19.9	19.8	19.8	19.8	
12	0	0.0	17.2	17.2			17.1	17.1	17.2	2.0	23.2	23.3	23.3	23.3	23.3	1.7	18.2	18.2	18.3	18.2	18.2	0.0	19.7	19.7	19.7	19.7	19.7	
12	7	0.0	17.1	17.1			17.1	17.2	17.2	2.0	23.1	23.2	23.1	23.2	23.1	1.7	18.2	18.2	18.2	18.3	18.3	0.0	19.7	19.8	19.8	19.7	19.8	
12	13	0.0	17.1	17.3			17.3	17.1	17.2	2.0	23.1	23.1	23.2	23.1	23.2	1.7	18.2	18.2	18.2	18.2	18.2	0.0	19.7	19.6	19.7	19.6	19.6	
25	0	0.0	17.2	17.3			17.3	17.2	17.2	2.0	23.1	23.1	23.2	23.2	23.1	1.7	18.1	18.3	18.3	18.2	18.2	0.0	19.7	19.6	19.7	19.7	19.6	
1	0	0.0	17.3	17.2			17.1	17.2	17.2	2.0	23.1	23.1	23.2	23.2	23.2	1.7	18.2	18.1	18.1	18.2	18.2	0.0	19.7	19.6	19.7	19.8	19.8	
1	12	0.0	17.2	17.2			17.2	17.2	17.3	2.0	23.2	23.2	23.3	23.2	23.3	1.7	18.3	18.2	18.2	18.1	18.2	0.0	19.8	19.6	19.6	19.7	19.7	
1	24	0.0	17.2	17.2			17.2	17.3	17.2	2.0	23.1	23.1	23.2	23.1	23.3	1.7	18.2	18.3	18.2	18.1	18.2	0.0	19.7	19.8	19.7	19.7	19.7	
12	0	0.0	17.3	17.2			17.2	17.3	17.2	3.0	22.1	22.1	22.2	22.2	22.2	2.7	17.2	17.3	17.3	17.3	17.1	0.0	19.9	19.6	19.7	19.7	19.6	
12	7	0.0	17.1	17.2			17.3	17.2	17.2	3.0	22.2	22.2	22.1	22.2	22.1	2.7	17.3	17.2	17.3	17.2	17.2	0.0	19.6	19.6	19.8	19.7	19.8	
12	13	0.0	17.1	17.2			17.3	17.1	17.1	3.0	22.2	22.1	22.3	22.2	22.1	2.7	17.2	17.1	17.2	17.2	17.2	0.0	19.6	19.9	19.6	19.7	19.6	
25	0	0.0	17.3	17.3	17.2	17.1	17.2	3.0	22.1	22.2	22.3	22.3	22.1	2.7	17.3	17.3	17.3	17.3	17.2	0.0	19.7	19.8	19.9	19.7	19.7			

9.5. LTE Rel. 11 Carrier Aggregation

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

For inter-band carrier aggregation with uplink assigned to one E-UTRA band (Table 5.6A-1), the requirements in subclause 6.2.3 apply.

For inter-band carrier aggregation with one component carrier per operating band and the uplink active in two E-UTRA bands, the requirements in subclause 6.2.3 apply for each uplink component carrier.

For intra-band contiguous carrier aggregation the allowed Maximum Power Reduction (MPR) for the maximum output power applicable to the DUT in table below. In case the modulation format is different on different component carriers then the MPR is determined by the rules applied to higher order of those modulations.

Modulation	CA bandwidth Class B and C / Smallest Component Carrier Transmission Bandwidth Configuration				MPR (dB)
	25 RB	50 RB	75 RB	100 RB	
QPSK	> 8 and $\leq$ 25	> 12 and $\leq$ 50	> 16 and $\leq$ 75	> 18 and $\leq$ 100	$\leq$ 1
QPSK	> 25	> 50	> 75	> 100	$\leq$ 2
16 QAM	$\leq$ 8	$\leq$ 12	$\leq$ 16	$\leq$ 18	$\leq$ 1
16 QAM	> 8 and $\leq$ 25	> 12 and $\leq$ 50	> 16 and $\leq$ 75	> 18 and $\leq$ 100	$\leq$ 2
16 QAM	> 25	> 50	> 75	> 100	$\leq$ 3
64 QAM	$\leq$ 8 and allocation wholly contained within a single CC	$\leq$ 12 and allocation wholly contained within a single CC	$\leq$ 16 and allocation wholly contained within a single CC	$\leq$ 18 and allocation wholly contained within a single CC	$\leq$ 2
64 QAM	> 8 or allocation extends across two CC's	> 12 or allocation extends across two CC's	> 16 or allocation extends across two CC's	> 18 or allocation extends across two CC's	$\leq$ 3

For PUCCH and SRS transmissions, the allowed MPR is according to that specified for PUSCH WPKD modulation for the corresponding transmission bandwidth.

For intra-band contiguous carrier aggregation bandwidth class C with non-contiguous resource allocation, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2A-1 is specified as follows

$$\text{MPR} = \text{CEIL} \{ \min(M_A, M_{\text{IM5}}), 0.5 \}$$

Where M_A is defined as follows

$$M_A = \begin{array}{ll} 8.2 & ; 0 \leq A < 0.025 \\ 9.2 - 40A & ; 0.025 \leq A < 0.05 \\ 8 - 16A & ; 0.05 \leq A < 0.25 \\ 4.83 - 3.33A & ; 0.25 \leq A \leq 0.4 \\ 3.83 - 0.83A & ; 0.4 \leq A \leq 1 \end{array}$$

and M_{IM5} is defined as follows

$$M_{\text{IM5}} = \begin{array}{ll} 4.5 & ; \Delta_{\text{IM5}} < 1.5 * \text{BW}_{\text{Channel_CA}} \\ 6.0 & ; 1.5 * \text{BW}_{\text{Channel_CA}} \leq \Delta_{\text{IM5}} < \text{BW}_{\text{Channel_CA}}/2 + \Delta f_{\text{ooB}} \\ M_A & ; \Delta_{\text{IM5}} \geq \text{BW}_{\text{Channel_CA}}/2 + \Delta f_{\text{ooB}} \end{array}$$

Where

$$A = N_{\text{RB_alloc}} / N_{\text{RB_agg}}$$

$$\Delta_{\text{IM5}} = \max(|F_{\text{C_agg}} - (3 * F_{\text{agg_alloc_low}} - 2 * F_{\text{agg_alloc_high}})|, |F_{\text{C_agg}} - (3 * F_{\text{agg_alloc_high}} - 2 * F_{\text{agg_alloc_low}})|)$$

$\text{CEIL}\{M_A, 0.5\}$ means rounding upwards to closest 0.5dB, i.e. $\text{MPR} \in [3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5]$

For intra-band carrier aggregation, the MPR is evaluated per slot and given by the maximum value taken over the transmission(s) on all component carriers within the slot; the maximum MPR over the two slots is then applied for the entire subframe.

For intra-band non-contiguous carrier aggregation with one uplink carrier on the PCC, the requirements in the subclause 6.2.3 apply. For intra-band non-contiguous aggregation with two uplink carriers the MPR is defined for those E-UTRA bands where maximum possible $W_{\text{GAP}} \leq 42.2$ MHz as follows

$$\text{MPR} = \text{CEIL}\{M_N, 0.5\}$$

Where M_N is defined as follows

$$M_N = \begin{array}{ll} -0.125N + 18.25 & ; 2 \leq N \leq 50 \\ -0.0333 N + 13.67 & ; 50 < N \leq 200 \end{array}$$

Where $N = N_{\text{RB_alloc}}$ is the number of allocated resource blocks.

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5A apply.

LTE Carrier Aggregation Test Signal Set-up Procedure

(Use normal LTE set-up procedure in addition with the following steps)

Set to CMW-500 with following parameters:

- PCC tab:
 - Select the testing Operating Band, Channel, Frequency, Cell Bandwidth, Uplink RBs

The screenshot shows the 'LTE Signaling 1 - V3.5.40 - Base V 3.5.90' interface. The 'PCC' tab is selected, showing the following parameters:

Parameter	Value
Operating Band	Band 7
Channel	2850 Ch
Frequency	2630.0 MHz
Cell Bandwidth	20.0 MHz
RS EPRE	-85.0 dBm/15kHz
Full Cell BW Pow.	-54.2 dBm
PUSCH Open Loop Nom.Power	23 dBm
PUSCH Closed Loop Target Power	33.0 dBm
Sched.	User def. Channels
Multicenter UL	☐
#RB	100
Start RB	0
Mod / TBSI	QPSK 5
Code Rate / TBS	0.320 8760
Throughput	8.760 Mbit/s


The 'LTE' tab on the right shows the following parameters:

Parameter	Value
LTE 1 TX Meas.	
LTE 1 RX Meas.	
Go to...	
Routing	
LTE Signaling	ON


The 'Config ...' button is highlighted in the bottom right corner.

- Go to "Config...."

- Go to "Scenario"
- Set to "2CC CA - 2 RF Out"

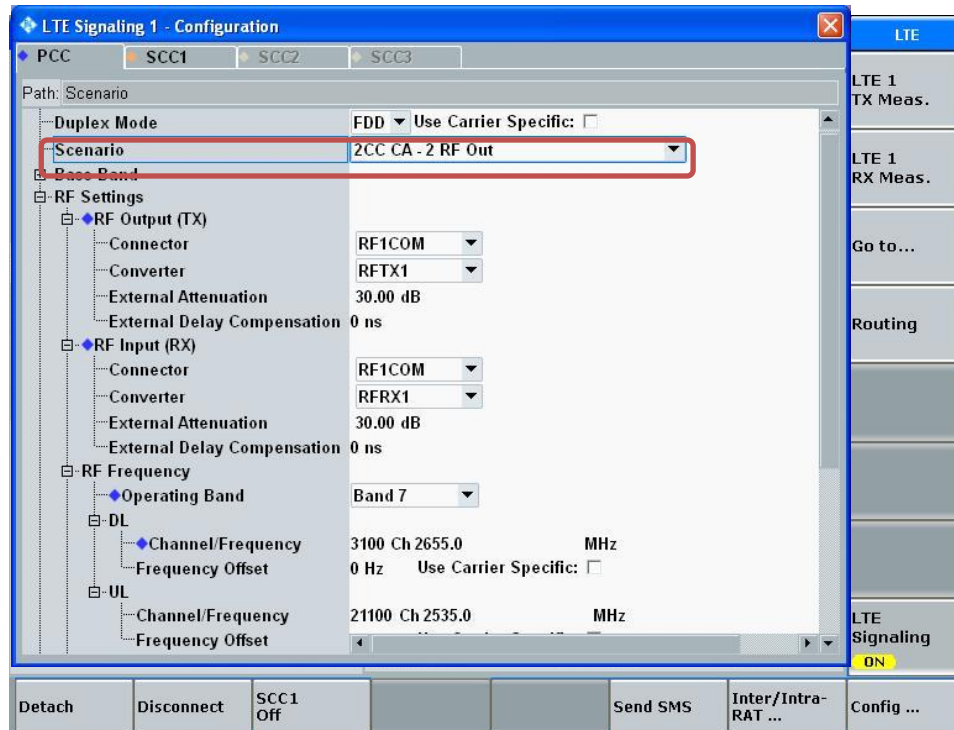

- Select "SCC1" tab
- Go to "Scenario"
- Set to "2CC CA - 2 RF Out"
- Enable "Use UL"
- Enable "Intraband Contiguous to PCC"
- Select "LTE Signaling" button

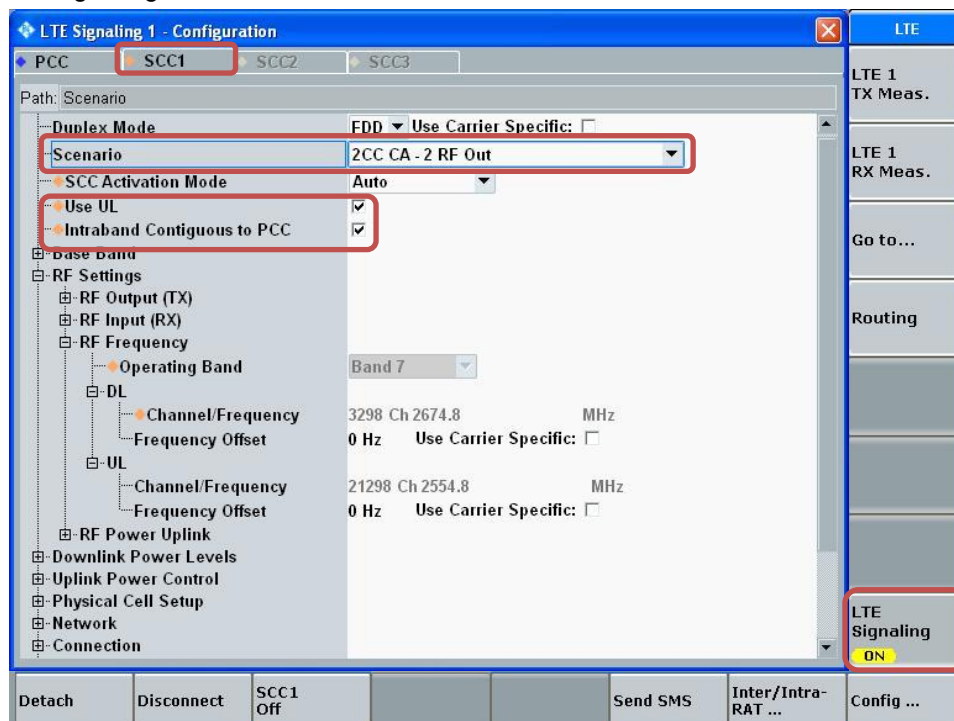

- Select “SCC1” tab
 - Select the testing Cell Bandwidth, Uplink RBs

The screenshot displays the LTE Signaling 1 - V3.5.40 - Base V 3.5.90 interface. The SCC1 tab is selected, and the configuration for the testing Cell Bandwidth and Uplink RBs is highlighted with a red box. The interface includes sections for Connection Status, Event Log, UE Info, and various configuration parameters.

Connection Status:

- Cell:
- Packet Switched:
- RRC State: Connected
- SCC1 State: MAC Activated

Event Log:

- 02:17:19 Redirection Successful
- 02:17:18 Tracking Area Update Received
- 02:17:18 RRC Connection Established
- 02:17:17 RRC Connection Released
- 02:17:16 Redirection Start
- 02:17:12 Redirection Successful

UE Info:

- IMEI: 359250065123018
- IMSI: 001010000150503
- Voice Domain Pr...: IMS PS Voice preferred CS Voic
- UE's Usage Settl...: Voice centric
- Default Bearer: IPv4 address 192.168.48.129fc01:abab:cdcl
- Dedicated Bearer: TFT Port Range DL / UL 5005 - 5008 / 5005 - 5008


Configuration Parameters:

Parameter	Downlink	Uplink
Operating Band	Band 7	FDD
Channel	3048 Ch	21048 Ch
Frequency	2649.8 MHz	2529.8 MHz
Cell Bandwidth	20.0 MHz	20.0 MHz
RS EPRE	-85.8 dBm/15kHz	
Full Cell BW Pow.	-55.0 dBm	
PUSCH Open Loop Nom.Power	23 dBm	
PUSCH Closed Loop Target Power	33.0 dBm	
Intraband Contiguous to PCC	☒	
PCC <-> SCC1	Swap	
PCC -> SCC1	Copy	
Sched.	User def. Channels	Multicenter UL
#RB	100	100
Start RB	0	0
Mod / TBSI	QPSK 5	QPSK 10
Code Rate / TBS	0.320 8760	0.613 17568
Throughput	8.760 Mbit/s	17.568 Mbit/s


Buttons: Detach, Disconnect, SCC1 Off, Send SMS, Inter/Intra-RAT ..., Config ...

Max Power Setting

- Select “Config ...” button
- Select PCC tab
- Set “Active TPC Setup” to “Max Power”

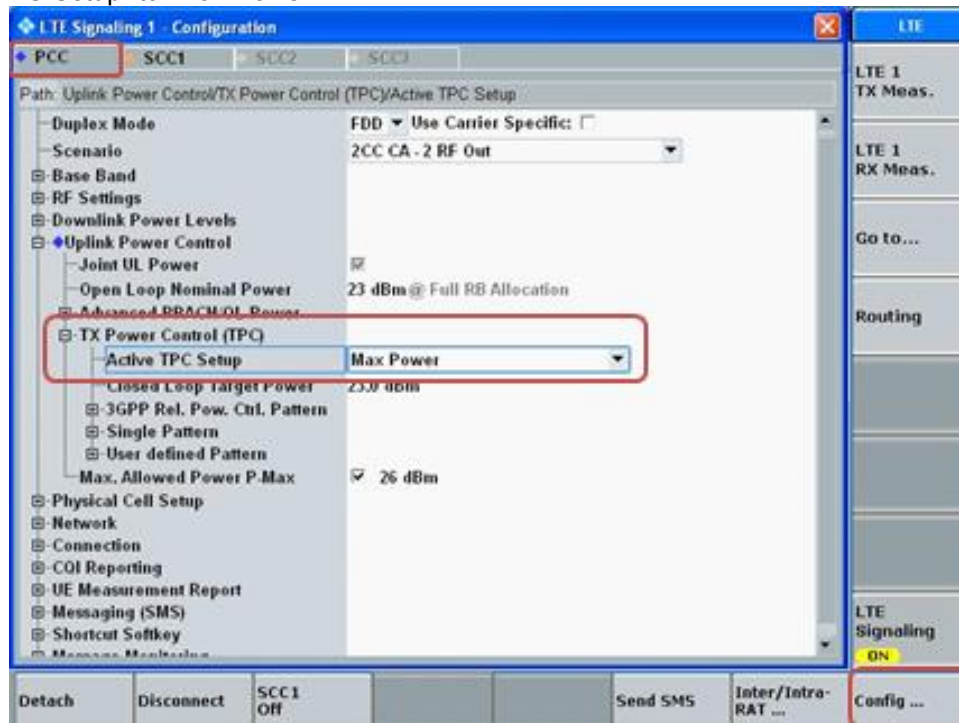


- Select SCC1 tab
- Verify that “Active TPC Setup” is set to “Max Power”

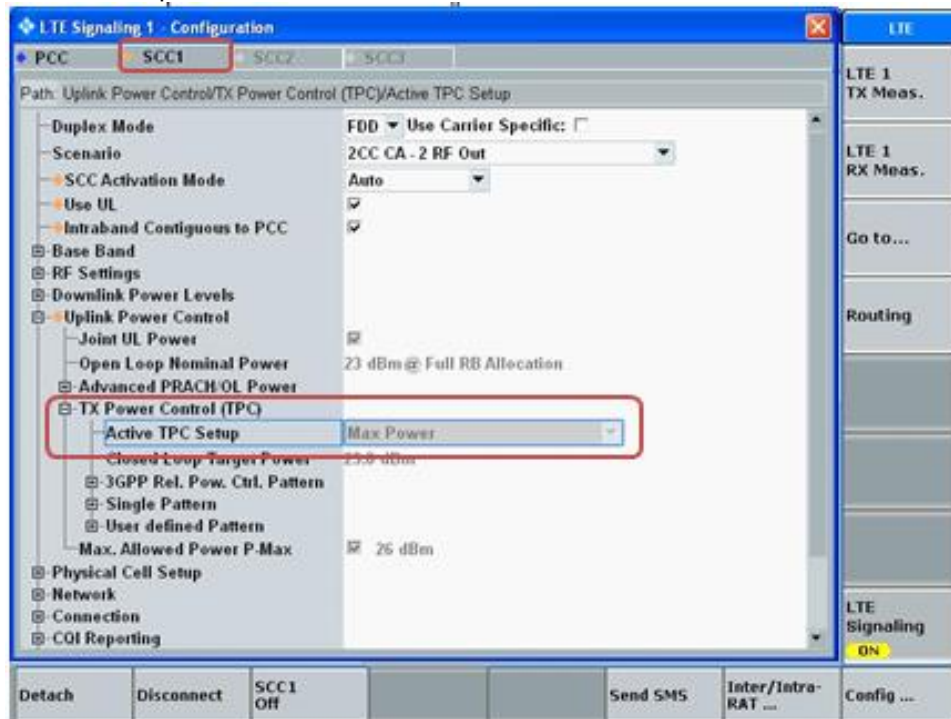

View TX Power

- Go to “Display”
- Select “Select View...”
- Select “Spectrum Emission Mask”

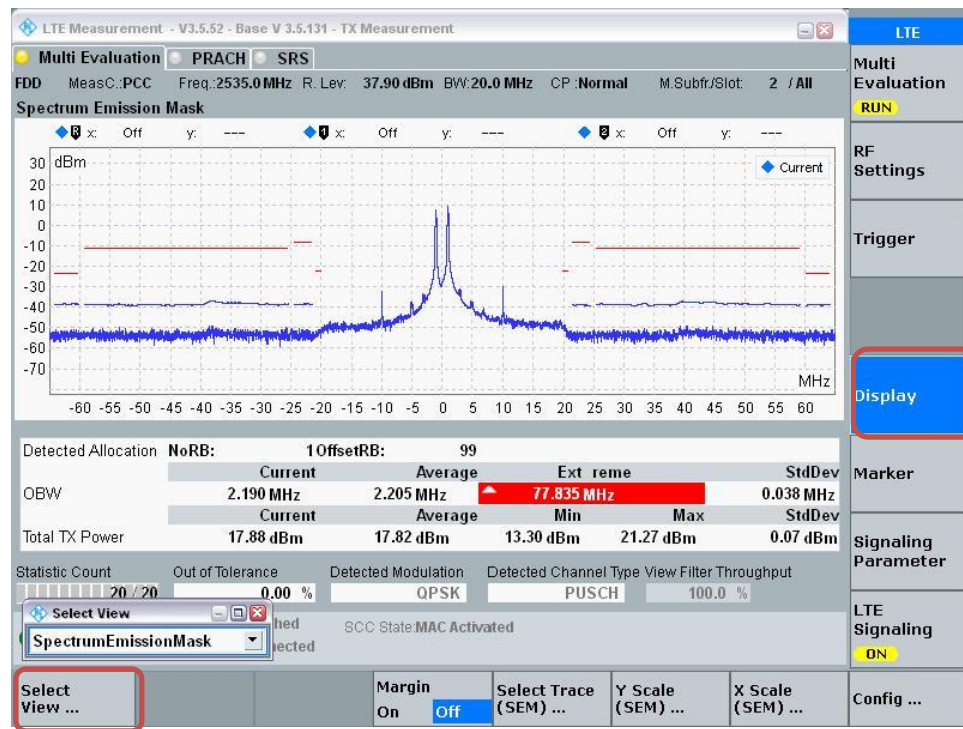

LTE Advanced Carrier Aggregation Combinations:

The tables below show the supported frequency bands and bandwidths of the device for DL Inter-band and DL Intra-band combinations.

DL Inter-Band (2 Bands, 3CC Max)

E-UTRA CA configuration (BCS)	E-UTRA Band	Bandwidth						Max Aggregated BW
		1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
CA_2A-2A-5A (0)	Band 2	See CA_2A-2A (0)						50 MHz
	Band 5			Yes	Yes			
CA_2A-2A-12A (0)	Band 2	See CA_2A-2A (0)						50 MHz
	Band 12			Yes	Yes			
CA_2A-2A-13A (0)	Band 2	See CA_2A-2A (0)						50 MHz
	Band 13				Yes			
CA_2A-2A-29A (0)	Band 2	See CA_2A-2A (0)						50 MHz
	Band 29			Yes	Yes			
CA_2A-2A-30A (0)	Band 2	See CA_2A-2A (0)						50 MHz
	Band 30			Yes	Yes			
CA-2A-4A (0) (1) (2)	Band 2	Yes	Yes	Yes	Yes	Yes	Yes	40 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 2			Yes	Yes			20 MHz
	Band 4			Yes	Yes			
	Band 2			Yes	Yes	Yes	Yes	40 MHz
	Band 4			Yes	Yes	Yes	Yes	
CA_2A-5A (0) (1)	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 5			Yes	Yes			
	Band 2			Yes	Yes			20 MHz
	Band 5			Yes	Yes			
CA_2C-5A (0)	Band 2	See CA_2C (0)						50 MHz
	Band 5			Yes	Yes			
CA_2A-12A (0) (1) (2)	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 12			Yes	Yes			
	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 12		Yes	Yes	Yes			
	Band 2			Yes	Yes			20 MHz
	Band 12			Yes	Yes			
CA_2C-12A (0)	Band 2	See CA_2C (0)						50 MHz
	Band 12			Yes	Yes			

CA-2A-12B (0)	Band 2			Yes	Yes	Yes	Yes	35 MHz
	Band 12	See CA_12B (0)						
CA_2A-13A (0) (1)	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 13				Yes			
	Band 2			Yes	Yes			20 MHz
	Band 13				Yes			
CA_2A-17A (0)	Band 2			Yes	Yes			20 MHz
	Band 17			Yes	Yes			
CA-2A-29A (0) (1) (2)	Band 2			Yes	Yes			20 MHz
	Band 29		Yes	Yes	Yes			
	Band 2			Yes	Yes			20 MHz
	Band 29			Yes	Yes			
	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 29			Yes	Yes			
CA-2C-29A (0)	Band 2	See CA_2C (0)						50 MHz
	Band 29			Yes	Yes			
CA_2A-30A (0)	Band 2			Yes	Yes	Yes	Yes	30 MHz
	Band 30			Yes	Yes			
CA_2C-30A (0)	Band 2	See CA_2C (0)						50 MHz
	Band 30			Yes	Yes			
CA_2A-66A (0) (1) (2)	Band 2	Yes	Yes	Yes	Yes	Yes	Yes	40 MHz
	Band 66			Yes	Yes	Yes	Yes	
	Band 2			Yes	Yes			20 MHz
	Band 66			Yes	Yes			
	Band 2			Yes	Yes	Yes	Yes	40 MHz
	Band 66			Yes	Yes	Yes	Yes	
CA_2A-66B (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 66	See CA_66B (0)						
CA-2A-66C (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 66	See CA_66C (0)						
CA_4A-4A-5A (0)	Band 4	See CA_4A-4A (0)						50 MHz
	Band 5			Yes	Yes			
CA_4A-4A-7A (0) (1)	Band 4			Yes	Yes			40 MHz
	Band 4			Yes	Yes			
	Band 7			Yes	Yes	Yes	Yes	60 MHz
	Band 4			Yes	Yes	Yes	Yes	

	Band 4			Yes	Yes	Yes	Yes	
	Band 7			Yes	Yes	Yes	Yes	
CA_4A-4A-12A (0)	Band 4	See CA_4A-4A (0)						50 MHz
	Band 12			Yes	Yes			
CA_4A-4A-13A (0)	Band 4	See CA_4A-4A (0)						50 MHz
	Band 13				Yes			
CA_4A-4A-29A (0)	Band 4	See CA_4A-4A (0)						50 MHz
	Band 29			Yes	Yes			
CA_4A-4A-30A (0)	Band 4	See CA_4A-4A (0)						50 MHz
	Band 30			Yes	Yes			
CA_4A-5A (0) (1)	Band 4			Yes	Yes			20 MHz
	Band 5			Yes	Yes			
	Band 4			Yes	Yes	Yes	Yes	30 MHz
	Band 5			Yes	Yes			
CA_4A-7A (0) (1)	Band 4			Yes	Yes			30 MHz
	Band 7			Yes	Yes	Yes	Yes	
	Band 4			Yes	Yes	Yes	Yes	40 MHz
	Band 7			Yes	Yes	Yes	Yes	
CA_4A-12A (0) (1) (2) (3) (4) (5)	Band 4	Yes	Yes	Yes	Yes			20 MHz
	Band 12			Yes	Yes			
	Band 4	Yes	Yes	Yes	Yes	Yes	Yes	30 MHz
	Band 12			Yes	Yes			
	Band 4			Yes	Yes	Yes	Yes	30 MHz
	Band 12		Yes	Yes	Yes			
	Band 4			Yes	Yes			20 MHz
	Band 12			Yes	Yes			
	Band 4			Yes	Yes	Yes	Yes	30 MHz
	Band 12			Yes	Yes			
	Band 4			Yes	Yes	Yes		20 MHz
	Band 12			Yes				
CA_4A-12B (0)	Band 4			Yes	Yes	Yes	Yes	35 MHz
	Band 12	See CA_12B (0)						
CA_4A-13A (0) (1)	Band 4			Yes	Yes	Yes	Yes	30 MHz
	Band 13				Yes			
	Band 4			Yes	Yes			20 MHz

	Band 13				Yes			
CA_4A-17A (0)	Band 4			Yes	Yes			20 MHz
	Band 17			Yes	Yes			
CA_4A-29A (0) (1) (2)	Band 4			Yes	Yes			20 MHz
	Band 29		Yes	Yes	Yes			
	Band 4			Yes	Yes			20 MHz
	Band 29			Yes	Yes			
	Band 4			Yes	Yes	Yes	Yes	30 MHz
	Band 29			Yes	Yes			
CA_4A-30A (0)	Band 4			Yes	Yes	Yes	Yes	20 MHz
	Band 30			Yes	Yes			
CA_5A-7A (0) (1)	Band 5	Yes	Yes	Yes	Yes			30 MHz
	Band 7				Yes	Yes	Yes	
	Band 5			Yes	Yes			30 MHz
	Band 7				Yes	Yes	Yes	
CA_5A-25A (0)	Band 5			Yes	Yes			30 MHz
	Band 25			Yes	Yes	Yes	Yes	
CA_5A-30A (0)	Band 5			Yes	Yes			20 MHz
	Band 30			Yes	Yes			
CA_5A-66A (0)	Band 5			Yes	Yes			30 MHz
	Band 66			Yes	Yes	Yes	Yes	
CA_7A-12A (0)	Band 7			Yes	Yes	Yes	Yes	30 MHz
	Band 12			Yes	Yes			
CA_12A-30A (0)	Band 12			Yes	Yes			20 MHz
	Band 30			Yes	Yes			
CA_12A-66A (0) (1) (2) (3) (4) (5)	Band 12			Yes	Yes			20 MHz
	Band 66	Yes	Yes	Yes	Yes			
	Band 12			Yes	Yes			30 MHz
	Band 66	Yes	Yes	Yes	Yes	Yes	Yes	
	Band 12		Yes	Yes	Yes			30 MHz
	Band 66			Yes	Yes	Yes	Yes	
	Band 12			Yes	Yes			20 MHz
	Band 66			Yes	Yes			
	Band 12			Yes	Yes			30 MHz
	Band 66			Yes	Yes	Yes	Yes	

	Band 12			Yes				20 MHz
	Band 66			Yes	Yes	Yes		
CA_12A-66A-66A (0)	Band 12			Yes	Yes			50 MHz
	Band 66	See CA_66A-66A (0)						
CA_12A_66C (0)	Band 12			Yes	Yes			50 MHz
	Band 66	See CA_66C (0)						
CA_13A-66A (0)	Band 13			Yes	Yes			30 MHz
	Band 66			Yes	Yes	Yes	Yes	
CA_25A-26A (0) (1) (2)	Band 25		Yes	Yes	Yes	Yes	Yes	35 MHz
	Band 26	Yes	Yes	Yes	Yes	Yes		
	Band 25		Yes	Yes	Yes			20 MHz
	Band 26		Yes	Yes	Yes			
	Band 25			Yes	Yes			20 MHz
	Band 26			Yes	Yes			
CA_29A-30A (0)	Band 29			Yes	Yes			20 MHz
	Band 30			Yes	Yes			
CA_30A-66A (0)	Band 30			Yes	Yes			30 MHz
	Band 66			Yes	Yes	Yes	Yes	

DL Inter-Band (3 Bands, 4CC Max)

E-UTRA CA configuration (BCS)	E-UTRA Band	Bandwidth						Max Aggregated BW
		1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
CA_2A-2A-5A-30A (0)	Band 2	See CA_2A-2A (0)						60 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-2A-12A-30A (0)	Band 2	See CA_2A-2A (0)						60 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-2A-29A-30A (0)	Band 2	See CA_2A-2A (0)						60 MHz
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_2C-29A-30A (0)	Band 2	See CA_2C (0)						60 MHz
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-4A-5A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 4			Yes	Yes	Yes	Yes	

	Band 5			Yes	Yes			
CA_2A-4A-12A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 12			Yes	Yes			
CA_2A-4A-13A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 13				Yes			
CA_2A-4A-29A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 29			Yes	Yes			
CA_2A-4A-30A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 30			Yes	Yes			
CA_2A-5A-30A (0)	Band 2			Yes	Yes	Yes	Yes	40 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA_2C-5A-30A (0)	Band 2	See CA_2C (0)						60 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-5A-66A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 5			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA_2A-12A-30A (0)	Band 2			Yes	Yes	Yes	Yes	40 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_2C-12A-30A (0)	Band 2	See CA_2C (0)						60 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-12A-66A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 12			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA_2A-13A-66A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 13			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA-2A-29A-30A (0)	Band 2			Yes	Yes	Yes	Yes	40 MHz
	Band 29			Yes	Yes			

	Band 30			Yes	Yes			
CA_2A-30A-66A (0)	Band 2			Yes	Yes	Yes	Yes	50 MHz
	Band 30			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA_2C_29A-30A (0)	Band 2	See CA_2C (0)						60 MHz
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-4A-5A-30A (0)	Band 4	See CA_4A_4A (0)						60 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-4A-12A-30A (0)	Band 4	See CA_4A_4A (0)						60 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-4A-29A-30A (0)	Band 4	See CA_4A_4A (0)						60 MHz
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-5A-30A (0)	Band 4			Yes	Yes	Yes	Yes	40 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-7A-12A (0) (1)	Band 4			Yes	Yes			40 MHz
	Band 7			Yes	Yes	Yes	Yes	
	Band 12			Yes	Yes			
	Band 4			Yes	Yes	Yes	Yes	50 MHz
	Band 7			Yes	Yes	Yes	Yes	
	Band 12			Yes	Yes			
CA_4A-12A-30A (0)	Band 4			Yes	Yes	Yes	Yes	40 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_4A-29A-30A (0)	Band 4			Yes	Yes	Yes	Yes	40 MHz
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_5A-30A-66A (0)	Band 5			Yes	Yes			40 MHz
	Band 30			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA_12A-30A-66A (0)	Band 12			Yes	Yes			40 MHz

	Band 30			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	

DL Inter-Band (4 Bands, 4CC Max)

E-UTRA CA configuration (BCS)	E-UTRA Band	Bandwidth						Max Aggregated BW
		1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
CA_2A-4A-5A-30A (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
CA2A-4A-12A-30A (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-4A-29A-30A (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 4			Yes	Yes	Yes	Yes	
	Band 29			Yes	Yes			
	Band 30			Yes	Yes			
CA_2A-5A-30A-66A (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 5			Yes	Yes			
	Band 30			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	
CA_2A-12A-30A-66A (0)	Band 2			Yes	Yes	Yes	Yes	60 MHz
	Band 12			Yes	Yes			
	Band 30			Yes	Yes			
	Band 66			Yes	Yes	Yes	Yes	

DL Intra-Band Non-Contiguous

E-UTRA CA configuration (BCS)	E-UTRA Band	Allowed Channel BW Per Carrier (MHz)			Max Aggregated BW
		1st Carrier	2nd Carrier	3rd Carrier	
CA_2A-2A (0)	Band 2	5, 10, 15, 20	5, 10, 15, 20		40 MHz
CA_4A-4A (0) (1)	Band 4	5, 10, 15, 20	5, 10, 15, 20		40 MHz
		5, 10	5, 10		20 MHz
CA_7A-7A (0) (1) (2) (3)	Band 7	5	15		40 MHz
		10	10, 15		
		15	15, 20		
		20	20		
		5, 10, 15, 20	5, 10, 15, 20		40 MHz
		5, 10, 15, 20	5, 10		30 MHz

		10, 15, 20	10, 15, 20		40 MHz
CA_25A-25A (0) (1)	Band 25	5, 10	5, 10		20 MHz
		5, 10, 15, 20	5, 10, 15, 20		40 MHz
CA_41A-41A (0) (1)	Band 41	10, 15, 20	10, 15, 20		40 MHz
		5, 10, 15, 20	5, 10, 15, 20		40 MHz
CA_41A-41C (0)	Band 41	5, 10, 15, 20	See CA_41C (1)		60 MHz
CA_41C_41A (0)	Band 41	See CA_41C (1)	5, 10, 15, 20		60 MHz
CA_66A-66A (0)	Band 66	5, 10, 15, 20	5, 10, 15, 20		40 MHz

DL Intra-Band Contiguous

E-UTRA CA configuration (BCS)	E-UTRA Band	Allowed Channel BW Per Carrier (MHz)			Max Aggregated BW
		1st Carrier	2nd Carrier	3rd Carrier	
CA_2C (0)	Band 2	5	20		40 MHz
		10	15, 20		
		15	10, 15, 20		
		20	5, 10, 15, 20		
CA_7B (0)	Band 7	15	5		20 MHz
CA_7C (0) (1) (2)	Band 7	15	15		40 MHz
		20	20		40 MHz
		10	20		
		15	15, 20		
		20	10, 15, 20		40 MHz
		15	10, 15		
		20	15, 20		
CA_12B (0)	Band 12	5	5, 10		15 MHz
CA_41C (0) (1) (2) (3)	Band 41	10	20		40 MHz
		15	15, 20		
		20	10, 15, 20		
		5, 10	20		40 MHz
		15	15, 20		
		20	5, 10, 15, 20		
		10	15, 20		40 MHz
		15	10, 15, 20		
		20	10, 15, 20		
		10	20		40 MHz
		20	20		

CA_41D (0)	Band 41	10	20	15	40 MHz
		10	15, 20	20	
		15	20	10, 15	
		15	10, 15, 20	20	
		20	15, 20	10	
		20	10, 15, 20	15, 20	
CA_66B (0)	Band 66	5	5, 10, 15		20 MHz
		10	5, 10		
		15	5		
CA_66C (0)	Band 66	10	15, 20		40 MHz
		15	10, 15, 20		
		20	5, 10, 15, 20		

UL Intra-Band Contiguous

E-UTRA CA configuration (BCS)	E-UTRA Band	Allowed Channel BW Per Carrier (MHz)			Max Aggregated BW
		1st Carrier	2nd Carrier	3rd Carrier	
CA_7C (0) (1) (2)	Band 7	15	15		40 MHz
		20	20		
		10	20		40 MHz
		15	15, 20		
		20	10, 15, 20		
		15	10, 15		40 MHz
		20	15, 20		
CA_41C (0) (1) (2) (3)	Band 41	10	20		40 MHz
		15	15, 20		
		20	10, 15, 20		
		5, 10	20		40 MHz
		15	15, 20		
		20	5, 10, 15, 20		
		10	15, 20		40 MHz
		15	10, 15, 20		
		20	10, 15, 20		
		10	20		40 MHz
		20	20		

Carrier Aggregation Power Measurements:

Power measurements were performed on the channel with the highest maximum output power from Tune-up Procedure on LAT antenna, Head power table on QPSK modulation following the Manufacturer KDB inquiry - Carrier Aggregation.

When carrier aggregation is limited to downlink only, uplink maximum output power (single carrier) is measured for the supported combinations of downlink carrier aggregation listed in the table below. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs (far right most configuration highlighted in the table below).

E-UTRA CA configuration (BCS)				
DL Inter-Band (2 Bands, 2CC)	DL Inter-Band (2 Bands, 3CC)	DL Inter-Band (3 Bands, 3CC)	DL Inter-Band (3 Bands, 4CC)	DL Inter-Band (4 Bands, 4CC)
CA_2A-4A(0)(1)(2)				CA_2A-4A-5A-30A(0)
CA_2A-5A(0)(1)	CA_2A-2A-5A(0)	CA_2A-4A-5A(0)		CA_2A-4A-5A-30A(0)
	CA_2C-5A(0)			
	CA_2C-30A(0)			
		CA_2A-5A-30A(0)	CA_2A-2A-5A-30A(0)	CA_2A-4A-5A-30A(0)
			CA_2C-5A-30A(0)	
CA_4A-5A(0)(1)	CA_4A-4A-5A(0)			CA_2A-4A-5A-30A(0)
CA_4A-30A(0)	CA_4A-4A-30A(0)	CA_4A-5A-30A(0)	CA_4A-4A-5A-30A(0)	CA_2A-4A-5A-30A(0)
CA_5A-30A(0)				CA_2A-4A-5A-30A(0)
CA_2A-12A(0)(1)(2)	CA_2A-2A-12A(0)	CA_2A-4A-12A(0)		CA_2A-4A-12A-30A(0)
		CA_2A-12A-30A(0)	CA_2A-2A-12A-30A(0)	CA_2A-4A-12A-30A(0)
			CA_2C-12A-30A(0)	
	CA_2A-12B(0)			
	CA_2C-12A(0)			
		CA_4A-12A-30A(0)	CA_4A-4A-12A-30A(0)	CA_2A-4A-12A-30A(0)
CA_4A-12A(0)(1)(2)(3)(4)(5)	CA_4A-4A-12A(0)	CA_4A-7A-12A(0)(1)		
	CA_4A-12B(0)			
CA_12A-30A(0)				CA_2A-4A-12A-30A(0)
CA_2A-29A(0)(1)(2)	CA_2A-2A-29A(0)	CA_2A-4A-29A(0)		CA_2A-4A-29A-30A(0)
CA_2A-30A(0)	CA_2A-2A-30A(0)	CA_2A-4A-30A(0)		CA_2A-4A-29A-30A(0)
CA_2C-29A(0)			CA_2C_29A-30A(0)	
		CA_2A-29A-30A(0)	CA_2A-2A-29A-30A(0)	CA_2A-4A-29A-30A(0)
CA_4A-29A(0)(1)(2)	CA_4A-4A-29A(0)			CA_2A-4A-29A-30A(0)
		CA_4A-29A-30A(0)	CA_4A-4A-29A-30A(0)	CA_2A-4A-29A-30A(0)
CA_29A-30A(0)				CA_2A-4A-29A-30A(0)
CA_2A-66A(0)(1)(2)		CA_2A-5A-66A(0)		CA_2A-5A-30A-66A(0)
		CA_2A_30A-66A(0)		CA_2A-5A-30A-66A(0)
	CA_2A-66B(0)			
	CA_2A-66C(0)			
CA_5A-66A(0)		CA_5A-30A-66A(0)		
		CA_2A-12A-66A(0)		CA_2A-12A-30A-66A(0)
CA_12A-66A(0)(1)(2)(3)(4)(5)	CA_12A-66A-66A(0)	CA_12A-30A-66A(0)		CA_2A-12A-30A-66A(0)
CA_30A-66A(0)				CA_2A-12A-30A-66A(0)
	CA_12A-66C(0)			
CA_2A-13A(0)(1)	CA_2A-2A-13A(0)	CA_2A-4A-13A(0)		
		CA_2A-13A-66A(0)		
CA_2A-17A(0)				
CA_4A-7A(0)(1)	CA_4A-4A-7A(0)(1)			
CA_4A-13A(0)(1)	CA_4A-4A-13A(0)			
CA_4A-17A(0)				
CA_7A-12A(0)				
CA_5A-7A(0)(1)				
CA_5A-25A(0)				
CA_13A-66A(0)				
CA_25A-26A(0)(1)(2)				

DL Inter-Band (2 Bands, 2CC and 3CC)

E-UTRA CA configuration (BCS)	Bands				DL												UL											
	PCC	SCC	TCC	QCC	PCC			SCC			TCC			QCC			PCC											
	1st	2nd	3rd	4th	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch	Aggregated BW	MPR	CA Inactive	CA Active	Delta	3GPP Rel. #
CA_2C-5A (0)	2C	2C	5A		20	1960	900	20	1980	1100	10	881.5	2525				QPSK	1	49	20	1880	18900	50	0	24.7	24.7	0.0	13
	5A	2C	2C		10	881.5	2525	20	1960	900	20	1980	1100				QPSK	1	24	10	836.5	20525	50	0	24.8	24.7	-0.1	13
CA_2C-12A (0)	2C	2C	12A		20	1960	900	20	1980	1100	10	737.5	5095				QPSK	1	49	20	1880	18900	50	0	24.7	24.7	0.0	13
	12A	2C	2C		10	737.5	5095	20	1960	900	20	1980	1100				QPSK	1	24	10	707.5	23095	50	0	24.8	24.7	-0.1	13
CA-2A-12B (0)	2A	12B	12B		20	1960	900	10	737.5	5095	5	745	5170				QPSK	1	49	20	1880	18900	35	0	24.7	24.7	0.0	12
	12B	12B	2A		10	737.5	5095	5	745	5170	20	1960	900				QPSK	1	24	10	707.5	23095	35	0	24.8	24.7	-0.1	12
CA_2A-17A (0)	2A	17A			20	1960	900	10	740	5790							QPSK	1	49	20	1880	18900	20	0	24.7	24.7	0.0	11
	17A	2A			10	740	5790	20	1960	900							QPSK	1	24	10	710	23790	20	0	24.8	24.8	0.0	11
CA_2C-30A (0)	2C	2C	30A		20	1960	900	20	1980	1100	10	2355	9820				QPSK	1	49	20	1880	18900	50	0	24.7	24.7	0.0	13
	30A	2C	2C		10	2355	9820	20	1960	900	20	1980	1100				QPSK	1	24	10	2310	27710	50	0	23.8	23.8	0.0	13
CA_2A-66B (0)	2A	66B	66B		20	1960	900	15	2145	66786	5	2155	66866				QPSK	1	49	20	1880	18900	40	0	24.7	24.7	0.0	14
	66B	66B	2A		15	2145	66786	5	2155	66866	20	1960	900				QPSK	1	49	15	1745	132322	40	0	24.7	24.6	-0.1	14
CA-2A-66C (0)	2A	66C	66C		20	1960	900	20	2145	66786	20	2165	66986				QPSK	1	49	20	1880	18900	60	0	24.7	24.7	0.0	14
	66C	66C	2A		20	2145	66786	20	2165	66986	20	1960	900				QPSK	1	49	20	1745	132322	60	0	24.7	24.6	-0.1	14
CA_4A-4A-7A (0) (1)	4A	4A	7A		20	2132.5	2175	20	2132.5	2175	20	2655	3100				QPSK	1	49	20	1732.5	20175	40	0	24.7	24.7	0.0	13
	7A	4A	4A		20	2655	3100	20	2132.5	2175	20	2132.5	2175				QPSK	1	49	20	2535	21100	40	0	24.5	24.5	0.0	13
CA_4A-4A-13A (0)	4A	4A	13A		20	2132.5	2175	20	2132.5	2175	10	751	5230				QPSK	1	49	20	1732.5	20175	50	0	24.7	24.7	0.0	12
	13A	4A	4A		10	751	5230	20	2132.5	2175	20	2132.5	2175				QPSK	1	24	10	782	23230	50	0	24.8	24.8	0.0	12
CA_4A-12B (0)	4A	12B	12B		20	2132.5	2175	10	737.5	5095	5A	745	5170				QPSK	1	49	20	1732.5	20175	35	0	24.7	24.7	0.0	12
	12B	12B	4A		10	737.5	5095	5	745	5170	20	2132.5	2175				QPSK	1	24	10	707.5	23095	35	0	24.8	24.7	-0.1	12
CA_4A-17A (0)	4A	17A			20	2132.5	2175	10	740	5790							QPSK	1	49	20	1732.5	20175	20	0	24.7	24.7	0.0	11
	17A	4A			10	740	5790	20	2132.5	2175							QPSK	1	24	10	710	23790	20	0	24.8	24.8	0.0	11
CA_5A-7A (0) (1)	5A	7A			10	881.5	2525	20	2655	3100							QPSK	1	24	10	836.5	20525	30	0	24.8	24.8	0.0	13
	7A	5A			20	2655	3100	10	881.5	2525							QPSK	1	49	20	2535	21100	30	0	24.5	24.5	0.0	13
CA_5A-25A (0)	5A	25A			10	881.5	2525	20	1962.5	8365							QPSK	1	24	10	836.5	20525	30	0	24.8	24.8	0.0	12
	25A	5A			20	1962.5	8365	10	881.5	2525							QPSK	1	49	20	1882.5	26365	30	0	24.0	24.0	0.0	12
CA_7A-12A (0)	7A	12A			20	2655	3100	10	737.5	5095							QPSK	1	49	20	2535	21100	30	0	24.5	24.5	0.0	12
	12A	7A			10	737.5	5095	20	2655	3100							QPSK	1	24	10	707.5	23095	30	0	24.8	24.7	-0.1	12
CA_12A-66C (0)	12A	66C	66C		10	737.5	5095	20	2145	66786	20	2165	66986				QPSK	1	24	10	707.5	23095	50	0	24.8	24.7	-0.1	14
	66C	66C	12A		20	2145	66786	20	2165	66986	10	737.5	5095				QPSK	1	49	20	1745	132322	50	0	24.7	24.7	0.0	14
CA_13A-66A (0)	13A	66A			10	751	5230	20	2145	66786							QPSK	1	24	10	782	23230	30	0	24.8	24.8	0.0	14
	66A	13A			20	2145	66786	10	751	5230							QPSK	1	49	20	1745	132322	30	0	24.7	24.7	0.0	14
CA_25A-26A (0) (1) (2)	25A	26A			20	1962.5	8365	10	876.5	8865							QPSK	1	49	20	1882.5	26365	35	0	24.0	24.0	0.0	13
	26A	25A			10	876.5	8865	20	1962.5	8365							QPSK	1	24	10	831.5	26865	35	0	24.8	24.7	-0.1	13

DL Inter-Band (3 Bands, 3 CC and 4 CC)

E-UTRA CA configuration (BCS)	Bands				DL												UL											
	PCC	SCC	TCC	QCC	PCC			SCC			TCC			QCC			PCC											
	1st	2nd	3rd	4th	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	Modulatio	RB	Offset	BW	Freq	Ch	Aggregated BW	MPR	CA Inactive	CA Active	Delta	3GPP Rel. #
CA_2A-4A-13A (0)	2A	4A	13A		20	1960	900	20	2132.5	2175	10	751	5230				QPSK	1	49	20	1880	18900	50	0	24.7	24.7	0.0	12
	4A	13A	2A		20	2132.5	2175	10	751	5230	20	1960	900				QPSK	1	49	20	1732.5	20175	50	0	24.7	24.7	0.0	12
	13A	2A	4A		10	751	5230	20	1960	900	20	2132.5	2175				QPSK	1	24	10	782	23230	50	0	24.8	24.8	0.0	12
CA_2C-5A-30A (0)	2C	2C	5A	30A	20	1960	900	20	1980	1100	10	881.5	2525	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	24.7	24.7	0.0	13
	5A	30A	2C	2C	10	881.5	2525	10	2355	9820	20	1960	900	20	1980	1100	QPSK	1	24	10	836.5	20525	60	0	24.8	24.7	-0.1	13
	30A	2C	2C	5A	10	2355	9820	20	1960	900	20	1980	1100	10	881.5	2525	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA_2C-12A-30A (0)	2C	2C	12A	30A	20	1960	900	20	1980	1100	10	737.5	5095	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	24.7	24.7	0.0	13
	12A	30A	2C	2C	10	737.5	5095	10	2355	9820	20	1960	900	20	1980	1100	QPSK	1	24	10	707.5	23095	60	0	24.8	24.7	-0.1	13
	30A	2C	2C	12A	10	2355	9820	20	1960	900	20	1980	1100	10	737.5	5095	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA_2A-13A-66A (0)	2A	13A	66A		20	1960	900	10	751	5230	20	2145	66786				QPSK	1	49	20	1880	18900	50	0	24.7	24.7	0.0	14
	13A	66A	2A		10	751	5230	20	2145	66786	20	1960	900				QPSK	1	24	10	782	23230	50	0	24.8	24.7	-0.1	14
	66A	2A	13A		20	2145	66786	20	1960	900	10	751	5230				QPSK	1	49	20	1745	132322	50	0	24.7	24.7	0.0	14
CA_2C_29A-30A (0)	2C	2C	29A	30A	20	1960	900	20	1980	1100	10	722.5	9715	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	24.7	24.7	0.0	13
	29A	30A	2C	2C	10	722.5	9715	10	2355	9820	20	1960	900	20	1980	1100	QPSK	1	24	10	DL Only	DL Only	60	0	DL Only	DL Only	DL Only	13
	30A	2C	2C	29A	10	2355	9820	20	1960	900	20	1980	1100	10	722.5	9715	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA_4A-7A-12A (0) (1)	4A	7A	12A		20	2132.5	2175	20	2655	3100	10	737.5	5095				QPSK	1	49	20	1732.5	20175	50	0	24.7	24.7	0.0	13
	7A	12A	4A		20	2655	3100	10	737.5	5095	20	2132.5	2175				QPSK	1	49	20	2535	21100	50	0	24.5	24.5	0.0	13
	12A	4A	7A		10	737.5	5095	20	2132.5	2175	20	2655	3100				QPSK	1	24	10	707.5	23095	50	0	24.8	24.7	-0.1	13
CA_5A-30A-66A (0)	5A	30A	66A		10	881.5	2525	10	2355	9820	20	2145	66786				QPSK	1	24	10	836.5	20525	40	0	24.8	24.7	-0.1	14
	30A	66A	5A		10	2355	9820	20	2145	66786	10	881.5	2525				QPSK	1	24	10	2310	27710	40	0	23.8	23.8	0.0	14
	66A	5A	30A		20	2145	66786	10	881.5	2525	10	2355	9820				QPSK	1	49	20	1745	132322	40	0	24.7	24.7	0.0	14

DL Inter-Band (4 Bands, 4CC)

E-UTRA CA configuration (BCS)	Bands				DL												UL											
	PCC	SCC	TCC	QCC	PCC			SCC			TCC			QCC			PCC											
	1st	2nd	3rd	4th	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	Modulatio	RB	Offset	BW	Freq	Ch	Aggregated BW	MPR	CA Inactive	CA Active	Delta	3GPP Rel. #
CA_2A-4A-5A-30A (0)	2A	4A	5A	30A	20	1960	900	20	2132.5	2175	10	881.5	2525	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	24.7	24.6	-0.1	13
	4A	5A	30A	2A	20	2132.5	2175	10	881.5	2525	10	2355	9820	20	1960	900	QPSK	1	49	20	1732.5	20175	60	0	24.7	24.6	-0.1	13
	5A	30A	2A	4A	10	881.5	2525	10	2355	9820	20	1960	900	20	2132.5	2175	QPSK	1	24	10	836.5	20525	60	0	24.8	24.7	-0.1	13
	30A	2A	4A	5A	10	2355	9820	20	1960	900	20	2132.5	2175	10	881.5	2525	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA2A-4A-12A-30A (0)	2A	4A	12A	30A	20	1960	900	20	2132.5	2175	10	737.5	5095	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	24.7	24.6	-0.1	13
	4A	12A	30A	2A	20	2132.5	2175	10	737.5	5095	10	2355	9820	20	1960	900	QPSK	1	49	20	1732.5	20175	60	0	24.7	24.6	-0.1	13
	12A	30A	2A	4A	10	737.5	5095	10	2355	9820	20	1960	900	20	2132.5	2175	QPSK	1	24	10	707.5	23095	60	0	24.8	24.8	0.0	13
	30A	2A	4A	12A	10	2355	9820	20	1960	900	20	2132.5	2175	10	737.5	5095	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA_2A-4A-29A-30A (0)	2A	4A	29A	30A	20	1960	900	20	2132.5	2175	10	722.5	9715	10	2355	9820	QPSK	1	49	20	1880	18900	60	0	24.7	24.6	-0.1	13
	4A	29A	30A	2A	20	2132.5	2175	10	722.5	9715	10	2355	9820	20	1960	900	QPSK	1	49	20	1732.5	20175	60	0	24.7	24.6	-0.1	13
	29A	30A	2A	4A	10	722.5	9715	10	2355	9820	20	1960	900	20	2132.5	2175	QPSK	1	24	10	DL Only	DL Only	60	0	DL Only	DL Only	DL Only	13
	30A	2A	4A	29A	10	2355	9820	20	1960	900	20	2132.5	2175	10	722.5	9715	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	13
CA_2A-5A-30A-66A (0)	2A	5A	30A	66A	20	1960	900	10	881.5	2525	10	2355	9820	20	2145	66786	QPSK	1	49	20	1880	18900	60	0	24.7	24.6	-0.1	14
	5A	30A	66A	2A	10	881.5	2525	10	2355	9820	20	2145	66786	20	1960	900	QPSK	1	24	10	836.5	20525	60	0	24.8	24.7	-0.1	14
	30A	66A	2A	5A	10	2355	9820	20	2145	66786	20	1960	900	10	881.5	2525	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	14
	66A	2A	5A	30A	20	2145	66786	20	1960	900	10	881.5	2525	10	2355	9820	QPSK	1	49	20	1745	132322	60	0	24.7	24.6	-0.1	14
CA_2A-12A-30A-66A (0)	2A	12A	30A	66A	20	1960	900	10	737.5	5095	10	2355	9820	20	2145	66786	QPSK	1	49	20	1880	18900	60	0	24.7	24.6	-0.1	14
	12A	30A	66A	2A	10	737.5	5095	10	2355	9820	20	2145	66786	20	1960	900	QPSK	1	24	10	707.5	23095	60	0	24.8	24.8	0.0	14
	30A	66A	2A	12A	10	2355	9820	20	2145	66786	20	1960	900	10	737.5	5095	QPSK	1	24	10	2310	27710	60	0	23.8	23.8	0.0	14
	66A	2A	12A	30A	20	2145	66786	20	1960	900	10	737.5	5095	10	2355	9820	QPSK	1	49	20	1745	132322	60	0	24.7	24.6	-0.1	14

In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the CA configuration with the largest aggregated DL CA BW in each frequency band, independently for contiguous and non-contiguous CA; however, if the same frequency band is used for both contiguous and non-contiguous CA, power measurement was performed using the configuration with the largest aggregated BW and maximum output power among contiguous and non-contiguous CA.

E-UTRA CA configuration (BCS)		
DL Intra-Band Non-Contiguous	DL Intra-Band Contiguous	UL Intra-Band Contiguous
CA_2A-2A (0)	CA_2C (0)	CA_7C (0) (1) (2)
CA_4A_4A (0) (1)	CA_7B (0)	CA_41C (0) (1) (2) (3)
CA_7A_7A (0) (1) (2) (3)	CA_7C (0) (1) (2)	
CA_25A_25A (0) (1)	CA_12B (0)	
CA_41A-41A (0) (1)	CA_41C (0) (1) (2) (3)	
CA_41A-41C (0)	CA_41D (0)	
CA_41C_41A (0)	CA_66B (0)	
CA_66A-66A (0)	CA_66C (0)	

DL Intra-Band Non-Contiguous

E-UTRA CA configuration (BCS)	Bands				DL												UL											
	PCC	SCC	TCC	QCC	PCC			SCC			TCC			QCC			PCC											
	1st	2nd	3rd	4th	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch	Aggregated BW	MPR	CA Inactive	CA Active	Delta	3GPP Rel. #
CA_2A-2A (0)	2A	2A			20	1940	700	20	1980	1100							QPSK	1	49	20	1860	18700	40	0	24.7	24.7	0.0	12
CA_4A_4A (0) (1)	4A	4A			20	2120	2050	20	2145	2300							QPSK	1	49	20	1720	20050	40	0	24.6	24.6	0.0	12
CA_7A_7A (0) (1) (2) (3)	7A	7A			20	2630	2850	20	2680	3350							QPSK	1	49	20	2510	20850	40	0	24.3	24.3	0.0	12
CA_25A_25A (0) (1)	25A	25A			20	1940	8140	20	1985	8590							QPSK	1	49	20	1860	26140	40	0	24.0	24.0	0.0	12
CA_41A-41A (0) (1)	41A	41A			20	2506	39750	20	2680	41490							QPSK	1	49	20	2506	39750	40	0	25.3	25.2	-0.1	12
CA_41A-41C (0)	41A	41C	41C		20	2506	39750	20	2660	41290	20	2680	41490				QPSK	1	49	20	2506	39750	60	0	25.3	25.2	-0.1	12
CA_41C_41A (0)	41C	41C	41A		20	2506	39750	20	2526	39950	20	2680	41490				QPSK	1	49	20	2506	39750	60	0	25.3	25.2	-0.1	12
CA_66A-66A (0)	66A	66A			20	2120	66536	20	2170	67035							QPSK	1	49	20	1720	132072	40	0	24.6	24.6	0.0	13

DL Intra-Band Contiguous

E-UTRA CA configuration (BCS)	Bands				DL												UL											
	PCC	SCC	TCC	QCC	PCC			SCC			TCC			QCC			PCC											
	1st	2nd	3rd	4th	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch	Aggregated BW	MPR	CA Inactive	CA Active	Delta	3GPP Rel. #
CA_2C (0)	2C	2C			20	1960	900	20	1980	1100							QPSK	1	49	20	1880	18900	40	0	24.7	24.7	0.0	12
CA_7B (0)	7B	7B			15	2655	3100	5	2665	3200							QPSK	1	36	15	2535	21100	20	0	24.5	24.5	0.0	13
CA_7C (0) (1) (2)	7C	7C			20	2655	3100	20	2675	3300							QPSK	1	49	20	2535	21100	40	0	24.5	24.5	0.0	13
CA_12B (0)	12B	12B			10	737.5	5095	5	745	5170							QPSK	1	24	10	707.5	23095	15	0	24.8	24.8	0.0	12
CA_41C (0) (1) (2) (3)	41C	41C			20	2593	40620	20	2613	40820							QPSK	1	49	20	2593	40620	40	0	25.3	25.2	-0.1	13
CA_41D (0)	41D	41D	41D		20	2593	40620	20	2613	40820	20	2633	41020				QPSK	1	49	20	2593	40620	60	0	25.3	25.2	-0.1	12
CA_66B (0)	66B	66B			15	2145	66786	5	2155	66886							QPSK	1	49	20	1745	132322	20	0	24.7	24.7	0.0	13
CA_66C (0)	66C	66C			20	2145	66786	20	2165	66986							QPSK	1	49	20	1745	132322	40	0	24.7	24.7	0.0	13

Uplink CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. One SAR configuration will be selected for UAT and one SAR configuration will be selected for LAT for each supported CA configuration. Uplink output power for UL CA is the total power measured across the PCC and SCC.

UL CA power measurements were performed for both antennas (UAT 1 and LAT 1) at with QPSK modulation based on the worst-case standalone SAR. The tune-up limits are provided in Section 6.3 of this report.

The UL CA mode power measurements represent the total power across both carriers. Measurements were made for all supported PCC bandwidths using the channel/RB combination resulting in the highest standalone output power at the least MPR (0 dB). SCCs were set to use configurations similar to the PCC to establish conservative or worst case equivalent SAR test conditions (highest maximum power with MPR of 0 dB).

The standalone power measurement is the power for the PCC in the non-CA mode (i.e. single carrier power). In all cases the UL CA power is less than or equal to the standalone power, which is in accordance with the tune-up limits in Section 6.3 of this report.

LTE-uplink 2CA Band 7 for SAR testing (Refer to Section. 10.21.)

RF Exposure Conditions	Antenna	E-UTRA CA configuration (BCS)	Bands		DL						UL																				
			PCC	SCC	PCC			SCC			PCC						SCC						MPR	Standalone		PCC+SCC					
			1st	2nd	BW	Freq	Ch	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch		PCC CA Inactive	SCC CA Inactive	Aggregated BW	MPR	Tune-Up Limit	CA Power (Total PCC+SCC)	Delta	3GPP Rel. #
Head	UAT 1	CA_7C (0) (1) (2)	7C	7C	20	2630	2850	20	2649.8	3048	QPSK	1	99	20	2510	20850	QPSK	1	0	20	2529.8	21048	0	15.1	15.1	40	0	15.3	15.0	-0.1	13
Head	UAT 1	CA_7C (0) (1) (2)	7C	7C	20	2655	3100	20	2674.8	3298	QPSK	1	99	20	2535	21100	QPSK	1	0	20	2554.8	21298	0	15.1	15.1	40	0	15.3	14.9	-0.2	13
Head	UAT 1	CA_7C (0) (1) (2)	7C	7C	20	2680	3350	20	2660.2	3152	QPSK	1	0	20	2560	21350	QPSK	1	99	20	2540.2	21152	0	15.0	15.0	40	0	15.3	14.9	-0.1	13
Head	LAT 1	CA_7C (0) (1) (2)	7C	7C	20	2630	2850	20	2649.8	3048	QPSK	1	99	20	2510	20850	QPSK	1	0	20	2529.8	21048	0	24.3	24.3	40	0	23.8	23.7	-0.6	13
Head	LAT 1	CA_7C (0) (1) (2)	7C	7C	20	2655	3100	20	2674.8	3298	QPSK	1	99	20	2535	21100	QPSK	1	0	20	2554.8	21298	0	24.4	24.4	40	0	23.8	23.7	-0.7	13
Head	LAT 1	CA_7C (0) (1) (2)	7C	7C	20	2680	3350	20	2660.2	3152	QPSK	1	0	20	2560	21350	QPSK	1	99	20	2540.2	21152	0	24.4	24.4	40	0	23.8	23.8	-0.6	13

LTE-uplink 2CA Band 41 for SAR testing (Refer to Section. 10.22.)

RF Exposure Conditions	Antenna	E-UTRA CA configuration (BCS)	Bands		DL						UL																				
			PCC	SCC	PCC			SCC			PCC						SCC						MPR	Standalone		PCC+SCC					
			1st	2nd	BW	Freq	Ch	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch	Modulation	RB	Offset	BW	Freq	Ch		PCC CA Inactive	SCC CA Inactive	Aggregated BW	MPR	Tune-Up Limit	CA Power (Total PCC+SCC)	Delta	3GPP Rel. #
Body-worn	UAT 1	CA_41C (0) (1) (2) (3)	41C	41C	20	2506	39750	20	2525.8	39948	QPSK	1	99	20	2506	39750	QPSK	1	0	20	2525.8	39948	0	20.0	20.0	40	0	19.3	19.1	-0.9	13
Body-worn	UAT 1	CA_41C (0) (1) (2) (3)	41C	41C	20	2550	40185	20	2569.3	40383	QPSK	1	99	20	2550	40185	QPSK	1	0	20	2569.3	40383	0	20.0	20.0	40	0	19.3	19.2	-0.8	13
Body-worn	UAT 1	CA_41C (0) (1) (2) (3)	41C	41C	20	2593	40620	20	2612.8	40818	QPSK	1	99	20	2593	40620	QPSK	1	0	20	2612.8	40818	0	20.0	20.0	40	0	19.3	19.3	-0.7	13
Body-worn	UAT 1	CA_41C (0) (1) (2) (3)	41C	41C	20	2637	41055	20	2656.3	41253	QPSK	1	99	20	2637	41055	QPSK	1	0	20	2656.3	41253	0	19.9	19.9	40	0	19.3	19.2	-0.7	13
Body-worn	UAT 1	CA_41C (0) (1) (2) (3)	41C	41C	20	2680	41490	20	2660.2	41292	QPSK	1	0	20	2680	41490	QPSK	1	99	20	2660.2	41292	0	19.9	19.9	40	0	19.3	19.2	-0.7	13
Body-worn	LAT 1	CA_41C (0) (1) (2) (3)	41C	41C	20	2506	39750	20	2525.8	39948	QPSK	1	99	20	2506	39750	QPSK	1	0	20	2525.8	39948	0	19.9	19.9	40	0	20.5	19.9	0.0	13
Body-worn	LAT 1	CA_41C (0) (1) (2) (3)	41C	41C	20	2550	40185	20	2569.3	40383	QPSK	1	99	20	2550	40185	QPSK	1	0	20	2569.3	40383	0	20.0	20.0	40	0	20.5	20.0	0.0	13
Body-worn	LAT 1	CA_41C (0) (1) (2) (3)	41C	41C	20	2593	40620	20	2612.8	40818	QPSK	1	99	20	2593	40620	QPSK	1	0	20	2612.8	40818	0	20.0	20.0	40	0	20.5	20.0	0.0	13
Body-worn	LAT 1	CA_41C (0) (1) (2) (3)	41C	41C	20	2637	41055	20	2656.3	41253	QPSK	1	0	20	2637	41055	QPSK	1	99	20	2616.7	40857	0	20.0	20.0	40	0	20.5	20.0	0.0	13
Body-worn	LAT 1	CA_41C (0) (1) (2) (3)	41C	41C	20	2680	41490	20	2660.2	41292	QPSK	1	0	20	2680	41490	QPSK	1	99	20	2660.2	41292	0	20.0	20.0	40	0	20.5	19.9	-0.1	13

9.6. WLAN SISO (P_{Cell_ON})

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-Worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted for the Wi-Fi technology in their respective Sections.

For 2.4 & 5GHz band, there are two use cases:

- P_{Cell_ON} : This will be used when both Cellular and Wi-Fi radios are ON.
- P_{Cell_OFF} : This will be used when only Wi-Fi radio is ON

Measured Results

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	802.11b	1 Tx	1	2412	9.5	9.5	18.0	18.0	15.0	15.0	13.5	13.5
			6	2437	9.5	9.5	18.0	18.0	15.0	15.0	13.5	13.5
			11	2462	9.5	9.5	18.0	18.0	15.0	15.0	13.5	13.5
Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 2		LAT 3		UAT 2		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
5.2	802.11ac	1 Tx VHT80	42	5210	7.3	7.3	Not required	Not required	14.0	14.0	Not required	Not required
5.3	802.11a	1 Tx	52	5260	Not required	Not required	19.8	19.8	Not required	Not required	Not required	Not required
			56	5280			19.8	19.8				
			60	5300			19.5	19.5				
			64	5320			16.5	16.5				
	802.11ac	1 Tx VHT80	58	5290	Not required	Not required	Not required	Not required	Not required	Not required	9.5	9.5
5.5	802.11a	1 Tx	108	5540	Not required	Not required	19.8	19.8	Not required	Not required	Not required	Not required
			124	5620			19.8	19.8				
			144	5720			19.8	19.8				
	802.11ac	1 Tx VHT80	106	5530	4.5	4.5	Not required	Not required	11.5	11.4	10.0	10.0
			122	5610	4.5	4.5			11.5	11.4	10.0	10.0
			138	5690	4.5	4.5			11.5	11.4	10.0	10.0
5.8	802.11a	1 Tx	153	5765	Not required	Not required	19.8	19.8	Not required	Not required	Not required	Not required
			157	5785			19.8	19.8				
			161	5805			19.8	19.8				
	802.11ac	1 Tx VHT80	155	5775	5.3	5.3	Not required	Not required	11.5	11.5	10.3	10.3

Note(s):

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.7. WLAN MIMO (P_{Cell_ON})

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-Worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted for the Wi-Fi technology in their respective Sections.

For 2.4 & 5GHz band, there are two use cases:

- P_{Cell_ON}: This will be used when both Cellular and Wi-Fi radios are ON.
- P_{Cell_OFF}: This will be used when only Wi-Fi radio is ON

Measured Results

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	802.11g	2 Tx CDD	1	2412	9.5	9.5	15.5	15.5	15.0	15.0	13.5	13.5
			2	2417	9.5	9.5	18.0	18.0	15.0	15.0	13.5	13.5
			6	2437	9.5	9.5	18.0	18.0	15.0	15.0	13.5	13.5
			9	2452	9.5	9.5	18.0	18.0	15.0	15.0	13.5	13.5
			10	2457	9.5	9.5	18.0	18.0	15.0	15.0	13.5	13.5
			11	2462	9.5	9.5	15.5	15.5	15.0	15.0	13.5	13.5
Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 2		LAT 3		UAT 2		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
5.2	802.11n	2 Tx HT40 CDD/STBC/SD M	38	5190	7.3	7.3	15.0	15.0	Not required	Not required	Not required	Not required
	802.11ac	2 Tx VHT 80 CDD/STBC/SD M	42	5210	Not required	Not required	Not required	Not required	14.0	14.0	9.0	9.0
5.5	802.11n	2 Tx HT40 CDD/STBC/SD M	110	5550	4.5	4.5	19.5	19.5	Not required	Not required	Not required	Not required
			126	5630	4.5	4.5	19.5	19.5				
			142	5710	4.5	4.5	19.5	19.5				
	802.11ac	2 Tx VHT80 CDD/STBC/SD M	106	5530	Not required	Not required	Not required	Not required	11.5	11.5	10.0	10.0
			122	5610					11.5	11.5	10.0	10.0
			138	5690					11.5	11.5	10.0	10.0
5.8	802.11a	2 Tx	153	5765	5.3	5.3	19.8	19.8	Not required	Not required	Not required	Not required
			157	5785	5.3	5.3	19.8	19.8				
			161	5805	5.3	5.3	19.8	19.8				
	802.11ac	2 Tx VHT80 CDD/STBC/SD M	155	5775	Not required	Not required	Not required	Not required	11.5	11.5	10.3	10.3

Note(s):

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.8. WLAN SISO (P_{Cell_OFF})

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-Worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted for the Wi-Fi technology in their respective Sections.

For 2.4 & 5GHz band, there are two use cases:

- P_{Cell_ON}: This will be used when both Cellular and Wi-Fi radios are ON.
- P_{Cell_OFF}: This will be used when only Wi-Fi radio is ON

Measured Results

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	802.11b	1 Tx	1	2412	14.8	14.8	19.0	19.0	18.3	18.3	18.8	18.8
			2	2417	14.8	14.8	20.0	20.0	18.3	18.3	18.8	18.8
			5	2432	14.8	14.8	21.5	21.4	18.3	18.3	18.8	18.8
			6	2437	14.8	14.8	21.5	21.4	18.3	18.3	18.8	18.8
			7	2442	14.8	14.8	20.0	20.0	18.3	18.3	18.8	18.8
			11	2462	14.8	14.8	19.0	19.0	18.3	18.3	18.8	18.8
Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 2		LAT 3		UAT 2		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
5.2	802.11n	1 Tx HT40	38	5190	Not required	Not required	Not required	Not required	16.5	16.5	Not required	Not required
			46	5230					18.3	18.3		
	802.11ac	1 Tx VHT80	42	5210	15.0	14.9	Not required	Not required	Not required	Not required	Not required	Not required
5.3	802.11a	1 Tx	52	5260	Not required	Not required	21.0	19.8	Not required	Not required	Not required	Not required
			56	5280			21.0	19.8				
			60	5300			19.5	19.5				
			64	5320			16.5	16.5				
	802.11n	1 Tx HT40	54	5270	Not required	Not required	Not required	Not required	Not required	Not required	16.3	16.2
			62	5310							15.5	15.5
5.5	802.11a	1 Tx	108	5540	Not required	Not required	21.0	19.8	Not required	Not required	Not required	Not required
			124	5620			21.0	19.8				
			144	5720			21.0	19.8				
	802.11ac	1 Tx VHT80	106	5530	12.3	12.3	Not required	Not required	15.0	15.0	15.0	15.0
			122	5610	12.3	12.3			15.8	15.6	16.8	16.8
			138	5690	12.3	12.3			15.8	15.8	16.8	16.8
5.8	802.11a	1 Tx	153	5765	Not required	Not required	21.0	19.8	Not required	Not required	Not required	Not required
			157	5785			21.0	19.8				
			161	5805			21.0	19.8				
	802.11ac	1 Tx VHT80	155	5775	13.0	13.0	Not required	Not required	15.8	15.0	17.0	16.2

Note(s):

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.9. WLAN MIMO (P_{Cell_OFF})

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-Worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted for the Wi-Fi technology in their respective Sections.

For 2.4 & 5GHz band, there are two use cases:

- P_{Cell_ON}: This will be used when both Cellular and Wi-Fi radios are ON.
- P_{Cell_OFF}: This will be used when only Wi-Fi radio is ON

Measured Results

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	802.11g	2 Tx CDD	3	2422	14.8	14.8	19.5	19.5	18.3	18.0	18.8	18.7
			4	2427	14.8	14.8	21.0	21.0	18.3	18.0	18.8	18.7
			6	2437	14.8	14.8	21.0	21.0	18.3	18.3	18.8	18.8
			8	2447	14.8	14.8	21.0	21.0	18.3	18.3	18.8	18.8
			9	2452	14.8	14.8	19.5	19.5	18.3	18.3	18.8	18.8
5.2	802.11n	2 Tx HT40 CDD/STBC/SD M	38	5190	15.0	14.9	15.0	15.0	15.0	14.8	15.0	15.0
			46	5230	15.0	14.9	19.5	19.5	18.3	18.3	15.8	15.8
	802.11n	2 Tx HT40 CDD/STBC/SD M	110	5550	12.3	12.3	19.5	19.5	Not required	Not required	Not required	Not required
			126	5630	12.3	12.3	19.5	19.5				
			142	5710	12.3	12.3	19.5	19.5				
	802.11ac	2 Tx VHT80 CDD/STBC/SD M	106	5530	Not required	Not required	Not required	Not required	14.5	14.5	14.5	14.5
			122	5610					15.8	15.7	16.8	16.8
			138	5690					15.8	15.7	16.8	16.8
	802.11a	2 Tx CDD	153	5765	13.0	13.0	21.0	21.0	Not required	Not required	Not required	Not required
			157	5785	13.0	13.0	21.0	21.0				
			161	5805	13.0	13.0	21.0	21.0				
	802.11ac	2 Tx VHT80 CDD/STBC/SD M	155	5775	Not required	Not Required	Not required	Not Required	15.8	15.8	17.0	17.0

Note(s):

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.10. Bluetooth

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-Worn configuration by the user. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

P_{low}

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	V 5.0 + EDR, GFSK	1 Tx	0	2402	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
			39	2441	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
			78	2480	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0

P_{High}

Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	V 5.0 + EDR, GFSK	1 Tx	0	2402	12.0	12.0	16.5	16.5	13.5	13.0	13.5	13.5
			39	2441	12.0	12.0	16.5	16.5	13.5	13.0	13.5	13.5
			78	2480	12.0	12.0	16.5	16.5	13.5	13.0	13.5	13.5

$P_{standalone}$


Band (GHz)	Mode	No. of Transmitters	Ch #	Freq. (MHz)	MODE A				MODE B			
					UAT 1		LAT 3		UAT 1		LAT 3	
					Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)	Max. Power Limit (dBm)	Measured Results (dBm)
2.4	V 5.0 + EDR, GFSK	1 Tx	0	2402	14.5	14.5	19.5	19.5	16.5	16.0	16.5	16.0
			39	2441	14.5	14.5	19.5	19.5	16.5	16.0	16.5	16.0
			78	2480	14.5	14.5	19.5	19.5	16.5	16.0	16.5	16.0

Notes:

1. Bluetooth P_{high} is used when Wi-Fi antenna is active and Cellular antenna is inactive.
2. Bluetooth P_{low} is used with Wi-Fi and Cellular antennas are active or with Wi-Fi inactive and Cellular antenna is active.
3. Bluetooth $P_{standalone}$ is used with Wi-Fi and Cellular antennas are inactive.

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.885	3.752	76.89%	1.30

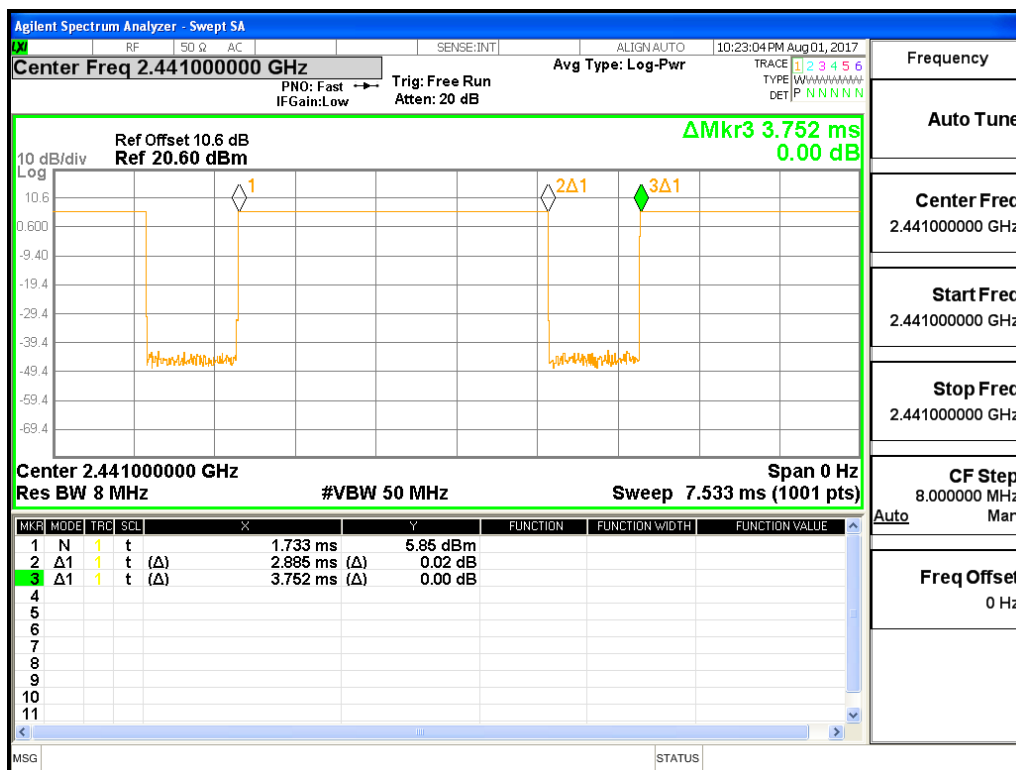GFSK Duty Cycle plot

10. Measured and Reported (Scaled) SAR Results

SAR Testing was performed based on the power measurement results from Sec. 9. Output power from both power modes: Mode A and Mode B were applied for each respective antenna. Mode A power is used when the device is used against the user's head, or away from the body. Mode B is used when the device is used in a body-worn configuration by the user. Mode C is used when the device is placed on a proprietary Apple wireless charger, as described in Sec. 6.3.5. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Test Tables were organized and labeled by antenna, UAT 1 and LAT 1 for cellular technologies. And for Wi-Fi/Bluetooth technologies, Test Tables were organized and labeled by power configuration and antenna (UAT 1 (Wi-Fi 2.4 GHz), UAT 2 (Wi-Fi 5 GHz), and LAT 3 (Wi-Fi-BT 2.4/5 GHz). Applicable SAR Test Reductions have been applied accordingly following the SAR KDB Procedure as follows:

GENERAL:

1. Reference from KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

2. Reference from KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

WIRELESS TECHNOLOGY:

3. Reference KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

4. Reference from KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- a) Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- b) When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- c) Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- d) Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- e) Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- f) For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

5. Reference from KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
 - > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
- For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
 - For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
 - When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
 - When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	GPRS 2 Slots	0	Left Touch	190	836.6	29.8	29.8	0.722	0.722	0.538	0.538	
			Left Tilt	190	836.6	29.8	29.8	0.486	0.486	0.286	0.286	
			Right Touch	128	824.2	29.8	29.8	0.724	0.724	0.476	0.476	
				190	836.6	29.8	29.8	0.800	0.800	0.517	0.517	
				251	848.8	29.8	29.8	0.844	0.844	0.540	0.540	1
			Right Tilt	190	836.6	29.8	29.8	0.498	0.498	0.283	0.283	
Body-worn & Hotspot	GPRS 2 Slots	5	Rear	190	836.6	29.8	29.8	0.328	0.328	0.212	0.212	
Front			190	836.6	29.8	29.8	0.309	0.309	0.201	0.201		
Edge 1			190	836.6	29.8	29.8	0.120	0.120	0.059	0.059		
Edge 2			190	836.6	29.8	29.8	0.352	0.352	0.232	0.232		
Edge 4			190	836.6	29.8	29.8	0.144	0.144	0.093	0.093		

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	GPRS 2 Slots	0	Left Touch	190	836.6	32.3	32.3	0.589	0.589	0.447	0.447	
			Left Tilt	190	836.6	32.3	32.3	0.157	0.157	0.122	0.122	
			Right Touch	190	836.6	32.3	32.3	0.490	0.490	0.365	0.365	
			Right Tilt	190	836.6	32.3	32.3	0.174	0.174	0.133	0.133	
Body-worn & Hotspot	GPRS 2 Slots	5	Rear	128	824.2	32.3	32.3	0.870	0.870	0.503	0.503	
				190	836.6	32.3	32.3	0.863	0.863	0.492	0.492	
				251	848.8	32.3	32.3	1.030	1.030	0.599	0.599	2
			Front	128	824.2	32.3	32.3	0.976	0.976	0.554	0.554	
				190	836.6	32.3	32.3	0.799	0.799	0.454	0.454	
				251	848.8	32.3	32.3	1.000	1.000	0.570	0.570	
Hotspot			Edge 2	190	836.6	32.3	32.3	0.247	0.247	0.161	0.161	
			Edge 3	190	836.6	32.3	32.3	0.479	0.479	0.230	0.230	
			Edge 4	190	836.6	32.3	32.3	0.745	0.745	0.491	0.491	

10.2. GSM1900

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head VoIP	GPRS 2 Slots	0	Left Touch	661	1880.0	23.0	22.1	0.253	0.311	0.147	0.181	
			Left Tilt	661	1880.0	23.0	22.1	0.184	0.226	0.108	0.133	
			Right Touch	512	1850.2	23.0	22.1	0.861	1.059	0.463	0.570	
				661	1880.0	23.0	22.1	0.869	1.069	0.470	0.578	3
			Right Tilt	810	1909.8	23.0	22.1	0.818	1.006	0.433	0.533	
Body-worn(VoIP) & Hotspot	GPRS 2 Slots	5	Rear	661	1880.0	23.8	23.8	0.405	0.498	0.215	0.265	
				512	1850.2	23.8	23.8	0.593	0.593	0.296	0.296	
				661	1880.0	23.8	23.8	0.612	0.612	0.305	0.305	
			Front	810	1909.8	23.8	23.8	0.609	0.609	0.302	0.302	
				661	1880.0	23.8	23.8	0.491	0.491	0.244	0.244	
Hotspot	GPRS 2 Slots	5	Edge 1	661	1880.0	23.8	23.8	0.567	0.567	0.261	0.261	
			Edge 2	661	1880.0	23.8	23.8	0.018	0.018	0.009	0.009	
			Edge 4	661	1880.0	23.8	23.8	0.412	0.412	0.222	0.222	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head VoIP	GPRS 2 Slots	0	Left Touch	661	1880.0	30.3	30.0	0.405	0.434	0.262	0.281	
			Left Tilt	661	1880.0	30.3	30.0	0.245	0.263	0.144	0.154	
			Right Touch	512	1850.2	30.3	30.0	0.742	0.795	0.455	0.488	
				661	1880.0	30.3	30.0	0.798	0.855	0.485	0.520	
			Right Tilt	810	1909.8	30.3	30.1	0.707	0.740	0.428	0.448	
Body-worn(VoIP) & Hotspot	GPRS 2 Slots	5	Rear	661	1880.0	25.0	25.0	0.283	0.303	0.166	0.178	
				512	1850.2	25.0	25.0	0.989	0.989	0.463	0.463	
				661	1880.0	25.0	25.0	0.957	0.957	0.448	0.448	
			Front	810	1909.8	25.0	25.0	1.070	1.070	0.502	0.502	4
				661	1880.0	25.0	25.0	0.598	0.598	0.304	0.304	
Hotspot	GPRS 2 Slots	5	Edge 2	661	1880.0	25.0	25.0	0.432	0.432	0.237	0.237	
			Edge 3	661	1880.0	25.0	25.0	0.723	0.723	0.335	0.335	
			Edge 4	661	1880.0	25.0	25.0	0.060	0.060	0.032	0.032	

10.3. W-CDMA Band V

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4132	826.4	23.8	23.8	0.964	0.964	0.717	0.717	
				4183	836.6	23.8	23.8	1.010	1.010	0.752	0.752	
				4233	846.6	23.8	23.8	1.040	1.040	0.770	0.770	
			Left Tilt	4183	836.6	23.8	23.8	0.592	0.592	0.344	0.344	
			Right Touch	4132	826.4	23.8	23.8	0.979	0.979	0.623	0.623	
				4183	836.6	23.8	23.8	1.050	1.050	0.661	0.661	
				4233	846.6	23.8	23.8	1.070	1.070	0.658	0.658	5
Body-worn & Hotspot	Rel 99 RMC	5	Right Tilt	4183	836.6	23.8	23.8	0.762	0.762	0.422	0.422	
			Rear	4183	836.6	23.8	23.8	0.523	0.523	0.324	0.324	
Hotspot	Rel 99 RMC	5	Front	4183	836.6	23.8	23.8	0.459	0.459	0.297	0.297	
			Edge 1	4183	836.6	23.8	23.8	0.156	0.156	0.076	0.076	
			Edge 2	4183	836.6	23.8	23.8	0.500	0.500	0.327	0.327	
			Edge 4	4183	836.6	23.8	23.8	0.241	0.241	0.157	0.157	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	24.8	24.8	0.489	0.489	0.368	0.368	
			Left Tilt	4183	836.6	24.8	24.8	0.168	0.168	0.132	0.132	
			Right Touch	4183	836.6	24.8	24.8	0.367	0.367	0.275	0.275	
			Right Tilt	4183	836.6	24.8	24.8	0.187	0.187	0.137	0.137	
Body-worn & Hotspot	Rel 99 RMC	5	Rear	4132	826.4	24.8	24.8	0.755	0.755	0.431	0.431	
				4183	836.6	24.8	24.8	0.866	0.866	0.494	0.494	
				4233	846.6	24.8	24.8	1.000	1.000	0.571	0.571	6
			Front	4183	836.6	24.8	24.8	0.742	0.742	0.418	0.418	
Hotspot	Rel 99 RMC	5	Edge 2	4183	836.6	24.8	24.8	0.193	0.193	0.125	0.125	
			Edge 3	4183	836.6	24.8	24.8	0.496	0.496	0.237	0.237	
			Edge 4	4183	836.6	24.8	24.8	0.701	0.701	0.459	0.459	

10.4. W-CDMA Band IV

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	1413	1732.6	18.0	17.6	0.399	0.433	0.256	0.278	
			Left Tilt	1413	1732.6	18.0	17.6	0.435	0.473	0.269	0.292	
			Right Touch	1312	1712.4	18.0	17.5	0.929	1.042	0.537	0.603	
				1413	1732.6	18.0	17.6	0.934	1.015	0.518	0.563	
				1513	1752.6	18.0	17.5	0.961	1.078	0.549	0.616	7
Body-worn & Hotspot	Rel 99 RMC	5	Right Tilt	1413	1732.6	18.0	17.6	0.732	0.795	0.419	0.455	
			Rear	1413	1732.6	18.8	18.5	0.518	0.555	0.287	0.308	
Hotspot	Rel 99 RMC	5	Front	1413	1732.6	18.8	18.5	0.628	0.673	0.322	0.345	
				1312	1712.4	18.8	18.5	0.621	0.665	0.301	0.323	
			Edge 1	1413	1732.6	18.8	18.5	0.695	0.745	0.340	0.364	
				1513	1752.6	18.8	18.5	0.727	0.779	0.358	0.384	
				1413	1732.6	18.8	18.5	0.024	0.026	0.014	0.015	
			Edge 4	1413	1732.6	18.8	18.5	0.439	0.470	0.244	0.261	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	1413	1732.6	25.3	25.3	0.366	0.366	0.255	0.255	
			Left Tilt	1413	1732.6	25.3	25.3	0.202	0.202	0.112	0.112	
			Right Touch	1312	1712.4	25.3	25.3	0.629	0.629	0.412	0.412	
				1413	1732.6	25.3	25.3	0.814	0.814	0.524	0.524	
				1513	1752.6	25.3	25.3	0.781	0.781	0.503	0.503	
Body-worn & Hotspot	Rel 99 RMC	5	Right Tilt	1413	1732.6	25.3	25.3	0.204	0.204	0.139	0.139	
			Rear	1312	1712.4	20.3	20.0	0.863	0.925	0.449	0.481	
				1413	1732.6	20.3	20.0	0.790	0.847	0.410	0.439	
				1513	1752.6	20.3	20.0	0.959	1.028	0.480	0.514	8
Hotspot	Rel 99 RMC	5	Front	1413	1732.6	20.3	20.0	0.640	0.686	0.340	0.364	
			Edge 2	1413	1732.6	20.3	20.0	0.343	0.368	0.194	0.208	
			Edge 3	1312	1712.4	20.3	20.0	0.871	0.933	0.419	0.449	
				1413	1732.6	20.3	20.0	0.927	0.993	0.448	0.480	
				1513	1752.6	20.3	20.0	0.929	0.995	0.451	0.483	
Hotspot	Rel 99 RMC	5	Edge 4	1413	1732.6	20.3	20.0	0.040	0.043	0.023	0.025	

10.5. W-CDMA Band II

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	17.5	17.2	0.343	0.368	0.203	0.218	
			Left Tilt	9400	1880.0	17.5	17.2	0.277	0.297	0.165	0.177	
			Right Touch	9262	1852.4	17.5	17.1	0.952	1.044	0.509	0.558	
				9400	1880.0	17.5	17.2	0.966	1.035	0.512	0.549	
				9538	1907.6	17.5	17.2	0.991	1.062	0.525	0.563	9
Body-worn & Hotspot	Rel 99 RMC	5	Right Tilt	9400	1880.0	17.5	17.2	0.714	0.765	0.378	0.405	
			Rear	9400	1880.0	19.3	18.2	0.586	0.755	0.297	0.383	
			Front	9400	1880.0	19.3	18.2	0.599	0.772	0.301	0.388	
Hotspot	Rel 99 RMC	5	Edge 1	9262	1852.4	19.3	18.1	0.648	0.854	0.300	0.395	
				9400	1880.0	19.3	18.2	0.637	0.821	0.293	0.377	
				9538	1907.6	19.3	18.3	0.596	0.750	0.268	0.337	
			Edge 2	9400	1880.0	19.3	18.2	0.021	0.027	0.011	0.014	
			Edge 4	9262	1852.4	19.3	18.2	0.497	0.640	0.268	0.345	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	25.0	24.8	0.491	0.514	0.321	0.336	
			Left Tilt	9400	1880.0	25.0	24.8	0.317	0.332	0.182	0.191	
			Right Touch	9262	1852.4	25.0	24.7	0.836	0.896	0.518	0.555	
				9400	1880.0	25.0	24.8	0.931	0.975	0.573	0.600	
				9538	1907.6	25.0	24.8	0.985	1.031	0.608	0.637	
Body-worn & Hotspot	Rel 99 RMC	5	Right Tilt	9400	1880.0	25.0	24.8	0.300	0.314	0.193	0.202	
			Rear	9262	1852.4	19.8	18.8	0.693	0.872	0.333	0.419	
				9400	1880.0	19.8	18.9	0.754	0.928	0.365	0.449	
				9538	1907.6	19.8	19.0	0.813	0.977	0.384	0.462	10
Hotspot	Rel 99 RMC	5	Front	9400	1880.0	19.8	18.9	0.571	0.702	0.287	0.353	
			Edge 2	9400	1880.0	19.8	18.9	0.426	0.524	0.231	0.284	
			Edge 3	9262	1852.4	19.8	18.8	0.628	0.791	0.294	0.370	
				9400	1880.0	19.8	18.9	0.655	0.806	0.305	0.375	
				9538	1907.6	19.8	19.0	0.634	0.762	0.283	0.340	
			Edge 4	9400	1880.0	19.8	18.9	0.083	0.102	0.043	0.053	

10.6. CDMA BC0

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	1013	824.7	23.3	23.3	0.907	0.907	0.678	0.678	11
				384	836.5	23.3	23.3	0.958	0.958	0.708	0.708	
				777	848.3	23.3	23.3	0.827	0.827	0.611	0.611	
			Left Tilt	384	836.5	23.3	23.3	0.582	0.582	0.320	0.320	
				1013	824.7	23.3	23.3	0.887	0.887	0.563	0.563	
				384	836.5	23.3	23.3	0.938	0.938	0.589	0.589	
				777	848.3	23.3	23.3	0.877	0.877	0.540	0.540	
Head	1xEVDO (Rel. 0)	0	Left Touch	1013	824.7	23.3	23.3	0.836	0.836	0.624	0.624	
				384	836.5	23.3	23.3	0.864	0.864	0.639	0.639	
				777	848.3	23.3	23.3	0.766	0.766	0.563	0.563	
			Left Tilt	384	836.5	23.3	23.3	0.612	0.612	0.350	0.350	
				1013	824.7	23.3	23.3	0.904	0.904	0.560	0.560	
				384	836.5	23.3	23.3	0.958	0.958	0.587	0.587	
				777	848.3	23.3	23.3	0.876	0.876	0.528	0.528	
Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Right Tilt	384	836.5	23.3	23.3	0.624	0.624	0.346	0.346	
				384	836.5	23.3	23.3	0.419	0.419	0.265	0.265	
Hotspot	1xRTT (RC3 SO32)	5	Front	384	836.5	23.3	23.3	0.360	0.360	0.250	0.250	
				384	836.5	23.3	23.3	0.147	0.147	0.070	0.070	
				384	836.5	23.3	23.3	0.482	0.482	0.316	0.316	
				384	836.5	23.3	23.3	0.187	0.187	0.122	0.122	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	384	836.5	24.8	24.8	0.461	0.461	0.348	0.348	
			Left Tilt	384	836.5	24.8	24.8	0.126	0.126	0.092	0.092	
			Right Touch	384	836.5	24.8	24.8	0.350	0.350	0.267	0.267	
			Right Tilt	384	836.5	24.8	24.8	0.151	0.151	0.095	0.095	
Head	1xEVDO (Rel. 0)	0	Left Touch	384	836.5	24.8	24.8	0.463	0.463	0.353	0.353	
			Left Tilt	384	836.5	24.8	24.8	0.164	0.164	0.125	0.125	
			Right Touch	384	836.5	24.8	24.8	0.432	0.432	0.324	0.324	
			Right Tilt	384	836.5	24.8	24.8	0.237	0.237	0.154	0.154	
Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Rear	1013	824.7	24.8	24.8	0.716	0.716	0.414	0.414	12
				384	836.5	24.8	24.8	0.815	0.815	0.480	0.480	
				777	848.3	24.8	24.8	0.866	0.866	0.503	0.503	
			Front	1013	824.7	24.8	24.8	0.773	0.773	0.442	0.442	
				384	836.5	24.8	24.8	0.863	0.863	0.494	0.494	
Hotspot	1xRTT (RC3 SO32)	5	Edge 2	777	848.3	24.8	24.8	0.806	0.806	0.463	0.463	
				384	836.5	24.8	24.8	0.244	0.244	0.158	0.158	
				384	836.5	24.8	24.8	0.420	0.420	0.202	0.202	
				384	836.5	24.8	24.8	0.605	0.605	0.399	0.399	

10.7. CDMA BC1

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	600	1880.0	17.5	17.3	0.473	0.501	0.280	0.297	
			Left Tilt	600	1880.0	17.5	17.3	0.354	0.375	0.204	0.216	
			Right Touch	25	1851.3	17.5	17.3	0.858	0.909	0.469	0.497	
				600	1880.0	17.5	17.3	0.898	0.951	0.467	0.495	
				1175	1908.8	17.5	17.3	0.897	0.950	0.483	0.512	
			Right Tilt	25	1851.3	17.5	17.3	0.781	0.827	0.407	0.431	
				600	1880.0	17.5	17.3	0.814	0.862	0.409	0.433	
Head	1xEVDO (Rel. 0)	0	Left Touch	600	1880.0	17.5	17.5	0.409	0.409	0.238	0.238	
			Left Tilt	600	1880.0	17.5	17.5	0.304	0.304	0.174	0.174	
			Right Touch	25	1851.3	17.5	17.5	0.972	0.972	0.514	0.514	
				600	1880.0	17.5	17.5	1.000	1.000	0.528	0.528	
				1175	1908.8	17.5	17.5	1.040	1.040	0.543	0.543	
			Right Tilt	600	1880.0	17.5	17.5	0.727	0.727	0.383	0.383	
			Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Rear	25	1851.3	19.3	18.1	0.562	0.741
Front	25	1851.3				19.3	18.1	0.488	0.643	0.249	0.328	
Hotspot	1xRTT (RC3 SO32)	5	Edge 1	25	1851.3	19.3	18.1	0.675	0.890	0.311	0.410	
				600	1880.0	19.3	18.1	0.614	0.809	0.279	0.368	
				1175	1908.8	19.3	18.1	0.576	0.759	0.261	0.344	
			Edge 2	600	1880.0	19.3	18.1	0.019	0.025	0.009	0.012	
			Edge 4	600	1880.0	19.3	18.1	0.524	0.691	0.281	0.370	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	600	1880.0	25.0	24.8	0.466	0.494	0.303	0.321	
			Left Tilt	600	1880.0	25.0	24.8	0.301	0.319	0.180	0.191	
			Right Touch	25	1851.3	25.0	24.8	0.767	0.812	0.479	0.507	
				600	1880.0	25.0	24.8	0.886	0.938	0.546	0.578	
				1175	1908.8	25.0	24.7	0.948	1.016	0.583	0.625	
			Right Tilt	600	1880.0	25.0	24.8	0.289	0.306	0.186	0.197	
Head	1xEVDO (Rel. 0)	0	Left Touch	600	1880.0	25.0	24.8	0.493	0.522	0.319	0.338	
			Left Tilt	600	1880.0	25.0	24.8	0.310	0.328	0.187	0.198	
			Right Touch	25	1851.3	25.0	24.8	0.829	0.878	0.510	0.540	
				600	1880.0	25.0	24.8	0.939	0.995	0.573	0.607	
				1175	1908.8	25.0	24.8	1.020	1.068	0.617	0.646	13
			Right Tilt	600	1880.0	25.0	24.8	0.288	0.305	0.182	0.193	
Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Rear	25	1851.3	19.8	19.0	0.731	0.869	0.349	0.415	
				600	1880.0	19.8	19.1	0.862	1.001	0.400	0.465	
				1175	1908.8	19.8	19.3	0.970	1.076	0.454	0.504	14
			Front	600	1880.0	19.8	19.1	0.570	0.662	0.291	0.338	
Hotspot	1xRTT (RC3 SO32)	5	Edge 2	600	1880.0	19.8	19.1	0.432	0.502	0.235	0.273	
			Edge 3	25	1851.3	19.8	19.0	0.732	0.870	0.345	0.410	
				600	1880.0	19.8	19.1	0.708	0.822	0.332	0.386	
				1175	1908.8	19.8	19.3	0.679	0.753	0.310	0.344	
			Edge 4	600	1880.0	19.8	19.1	0.044	0.051	0.024	0.028	

10.8. CDMA BC10

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	450	817.3	23.3	23.3	0.859	0.859	0.642	0.642	15
				560	820.0	23.3	23.3	0.887	0.887	0.662	0.662	
				670	822.8	23.3	23.3	0.876	0.876	0.654	0.654	
			Left Tilt	560	820.0	23.3	23.3	0.520	0.520	0.331	0.331	
			Right Touch	450	817.3	23.3	23.3	0.833	0.833	0.536	0.536	
				560	820.0	23.3	23.3	0.848	0.848	0.545	0.545	
				670	822.8	23.3	23.3	0.867	0.867	0.556	0.556	
			Right Tilt	560	820.0	23.3	23.3	0.628	0.628	0.357	0.357	
Head	1xEVDO (Rel. 0)	0	Left Touch	450	817.3	23.3	23.3	0.767	0.767	0.573	0.573	
				560	820.0	23.3	23.3	0.781	0.781	0.583	0.583	
				670	822.8	23.3	23.3	0.791	0.791	0.589	0.589	
			Left Tilt	560	820.0	23.3	23.3	0.520	0.520	0.318	0.318	
			Right Touch	450	817.3	23.3	23.3	0.849	0.849	0.531	0.531	
				560	820.0	23.3	23.3	0.865	0.865	0.538	0.538	
				670	822.8	23.3	23.3	0.880	0.880	0.548	0.548	
			Right Tilt	560	820.0	23.3	23.3	0.599	0.599	0.333	0.333	
Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Rear	560	820.0	23.3	23.3	0.307	0.307	0.202	0.202	
			Front	560	820.0	23.3	23.3	0.277	0.277	0.189	0.189	
Hotspot	1xRTT (RC3 SO32)	5	Edge 1	560	820.0	23.3	23.3	0.096	0.096	0.047	0.047	
			Edge 2	560	820.0	23.3	23.3	0.389	0.389	0.257	0.257	
			Edge 4	560	820.0	23.3	23.3	0.187	0.187	0.123	0.123	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	560	820.0	24.8	24.8	0.366	0.366	0.275	0.275	
			Left Tilt	560	820.0	24.8	24.8	0.128	0.128	0.096	0.096	
			Right Touch	560	820.0	24.8	24.8	0.289	0.289	0.219	0.219	
			Right Tilt	560	820.0	24.8	24.8	0.147	0.147	0.109	0.109	
Head	1xEVDO (Rel. 0)	0	Left Touch	560	820.0	24.8	24.8	0.448	0.448	0.341	0.341	
			Left Tilt	560	820.0	24.8	24.8	0.218	0.218	0.168	0.168	
			Right Touch	560	820.0	24.8	24.8	0.355	0.355	0.267	0.267	
			Right Tilt	560	820.0	24.8	24.8	0.229	0.229	0.171	0.171	
Body-worn & Hotspot	1xRTT (RC3 SO32)	5	Rear	560	820.0	24.8	24.8	0.623	0.623	0.368	0.368	16
			Front	560	820.0	24.8	24.8	0.612	0.612	0.347	0.347	
Hotspot	1xRTT (RC3 SO32)	5	Edge 2	560	820.0	24.8	24.8	0.194	0.194	0.127	0.127	
			Edge 3	560	820.0	24.8	24.8	0.351	0.351	0.169	0.169	
			Edge 4	560	820.0	24.8	24.8	0.594	0.594	0.392	0.392	

10.9. LTE Band 2 (20MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

With the exception of LAT Head, SAR for LTE Band 2 (Frequency range: 1850 - 1910 MHz) is covered by LTE Band 25 (Frequency range: 1850 - 1915 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	18900	1880.0	1	49	24.8	24.7	0.462	0.473	0.301	0.308	
						50	24	23.8	23.7	0.366	0.375	0.240	0.246	
			Left Tilt	18900	1880.0	1	49	24.8	24.7	0.239	0.245	0.145	0.148	
						50	24	23.8	23.7	0.183	0.187	0.110	0.113	
			Right Touch	18700	1860.0	1	49	24.8	24.7	0.819	0.838	0.509	0.521	
						50	24	23.8	23.7	0.659	0.674	0.410	0.420	
				18900	1880.0	1	49	24.8	24.7	0.889	0.910	0.547	0.560	
						50	24	23.8	23.7	0.715	0.732	0.440	0.450	
						100	0	23.8	23.7	0.737	0.754	0.455	0.466	
				19100	1900.0	1	49	24.8	24.8	1.030	1.030	0.631	0.631	17
						50	24	23.8	23.8	0.835	0.835	0.510	0.510	
			Right Tilt	18900	1880.0	1	49	24.8	24.7	0.330	0.338	0.187	0.191	
						50	24	23.8	23.7	0.260	0.266	0.147	0.150	

10.10. LTE Band 4 (20MHz Bandwidth)

SAR for LTE Band 4 (Frequency range: 1710 - 1755 MHz) is covered by LTE Band 66 (Frequency range: 1710 - 1780 MHz) due to overlapping frequency range, same maximum tune-up limit and similar channel bandwidth.

10.11. LTE Band 5 (10MHz Bandwidth)

SAR for LTE Band 5 (Frequency range: 824 - 849 MHz) is covered by LTE Band 26 (Frequency range: 814 – 849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel

10.12. LTE Band 7 (20MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.		
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled			
Head	QPSK	0	Left Touch	20850	2510.0	1	49	15.3	15.0	0.944	1.012	0.352	0.377			
						50	24	15.3	15.0	0.942	1.009	0.353	0.378			
				21100	2535.0	1	49	15.3	15.0	0.796	0.853	0.299	0.320			
						50	24	15.3	15.0	0.808	0.866	0.303	0.325			
						100	24	15.3	15.0	0.895	0.959	0.334	0.358			
						50	24	15.3	15.0	0.831	0.890	0.314	0.336			
			21350	2560.0	1	49	15.3	15.0	0.719	0.770	0.275	0.295				
					50	24	15.3	15.0	0.831	0.890	0.314	0.336				
					Left Tilt	20850	2510.0	1	49	15.3	15.0	0.992	1.063	0.350	0.375	
								50	24	15.3	15.0	1.010	1.082	0.349	0.374	
						21100	2535.0	1	49	15.3	15.0	0.816	0.874	0.288	0.309	
								50	24	15.3	15.0	0.836	0.896	0.295	0.316	
			21350	2560.0	1	49	15.3	15.0	0.739	0.792	0.263	0.282				
					50	24	15.3	15.0	0.868	0.930	0.301	0.323				
			Right Touch	21100	2535.0	1	49	15.3	15.0	0.381	0.408	0.155	0.166			
						50	24	15.3	15.0	0.386	0.414	0.158	0.169			
			Right Tilt	21100	2535.0	1	49	15.3	15.0	0.467	0.500	0.180	0.193			
						50	24	15.3	15.0	0.477	0.511	0.183	0.196			
Body-worn & Hotspot	QPSK	5	Rear	20850	2510.0	1	49	18.5	17.5	0.606	0.763	0.241	0.303			
						50	24	18.5	17.5	0.683	0.860	0.270	0.340			
				21100	2535.0	1	49	18.5	17.5	0.665	0.837	0.270	0.340			
						50	24	18.5	17.5	0.682	0.859	0.277	0.349			
						100	24	18.5	17.5	0.604	0.760	0.250	0.315			
				21350	2560.0	1	49	18.5	17.5	0.655	0.825	0.289	0.364			
			50			24	18.5	17.5	0.672	0.846	0.295	0.371				
			Front	21100	2535.0	1	49	18.5	17.5	0.612	0.770	0.244	0.307			
						50	24	18.5	17.5	0.618	0.778	0.247	0.311			
Hotspot	QPSK	5	Edge 1	21100	2535.0	1	49	18.5	17.5	0.508	0.640	0.179	0.225			
						50	24	18.5	17.5	0.511	0.643	0.181	0.228			
			Edge 2	21100	2535.0	1	49	18.5	17.5	0.554	0.697	0.259	0.326			
						50	24	18.5	17.5	0.576	0.725	0.268	0.337			
			Edge 4	21100	2535.0	1	49	18.5	17.5	0.071	0.089	0.033	0.042			
						50	24	18.5	17.5	0.072	0.091	0.034	0.043			

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	20850	2510.0	1	49	24.5	24.3	1.000	1.047	0.536	0.561	
						50	24	24.3	24.3	0.963	0.963	0.511	0.511	
				21100	2535.0	1	49	24.5	24.5	1.130	1.130	0.603	0.603	
						50	24	24.3	24.3	1.120	1.120	0.595	0.595	
						100	0	24.3	24.3	1.110	1.110	0.583	0.583	
				21350	2560.0	1	49	24.5	24.5	1.140	1.140	0.601	0.601	18
			50			24	24.3	24.3	1.120	1.120	0.588	0.588		
			Left Tilt	21100	2535.0	1	49	24.5	24.5	0.179	0.179	0.090	0.090	
						50	24	24.3	24.3	0.184	0.184	0.082	0.082	
			Right Touch	21100	2535.0	1	49	24.5	24.5	0.621	0.621	0.337	0.337	
						50	24	24.3	24.3	0.579	0.579	0.317	0.317	
			Right Tilt	21100	2535.0	1	49	24.5	24.5	0.257	0.257	0.132	0.132	
						50	24	24.3	24.3	0.243	0.243	0.125	0.125	
Body-worn & Hotspot	QPSK	5	Rear	20850	2510.0	1	49	18.0	17.5	0.693	0.778	0.276	0.310	
						1	49	18.0	17.5	0.819	0.919	0.332	0.373	
				50	24	18.0	17.5	0.701	0.787	0.313	0.351			
			Front	21350	2560.0	1	49	18.0	17.5	0.753	0.845	0.341	0.383	
						20850	2510.0	1	49	18.0	17.5	0.713	0.800	0.278
				1	49	18.0		17.5	0.746	0.837	0.292	0.328		
				50	24	18.0		17.5	0.623	0.699	0.248	0.278		
				21350	2560.0	1	49	18.0	17.5	0.863	0.968	0.334	0.375	19
Hotspot	QPSK	5	Edge 2	21100	2535.0	1	49	18.0	17.5	0.037	0.042	0.018	0.020	
						50	24	18.0	17.5	0.040	0.045	0.019	0.021	
			Edge 3	21100	2535.0	1	49	18.0	17.5	0.560	0.628	0.195	0.219	
						50	24	18.0	17.5	0.499	0.560	0.176	0.197	
			Edge 4	21100	2535.0	1	49	18.0	17.5	0.502	0.563	0.239	0.268	
						50	24	18.0	17.5	0.555	0.623	0.261	0.293	

10.13. LTE Band 12 (10MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	23095	707.5	1	24	23.3	23.3	0.587	0.587	0.425	0.425	20
						25	12	22.3	22.3	0.491	0.491	0.356	0.356	
			Left Tilt	23095	707.5	1	24	23.3	23.3	0.514	0.514	0.314	0.314	
						25	12	22.3	22.3	0.389	0.389	0.240	0.240	
			Right Touch	23095	707.5	1	24	23.3	23.3	0.754	0.754	0.456	0.456	
						25	12	22.3	22.3	0.623	0.623	0.376	0.376	
Body-worn & Hotspot	QPSK	5	Rear	23095	707.5	1	24	23.3	23.3	0.302	0.302	0.196	0.196	
						25	12	22.3	22.3	0.243	0.243	0.158	0.158	
			Front	23095	707.5	1	24	23.3	23.3	0.223	0.223	0.141	0.141	
						25	12	22.3	22.3	0.180	0.180	0.114	0.114	
			Edge 1	23095	707.5	1	24	23.3	23.3	0.130	0.130	0.062	0.062	
						25	12	22.3	22.3	0.133	0.133	0.064	0.064	
Hotspot	QPSK	5	Edge 2	23095	707.5	1	24	23.3	23.3	0.389	0.389	0.265	0.265	
						25	12	22.3	22.3	0.318	0.318	0.217	0.217	
			Edge 4	23095	707.5	1	24	23.3	23.3	0.247	0.247	0.167	0.167	
						25	12	22.3	22.3	0.206	0.206	0.140	0.140	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	23095	707.5	1	24	24.8	24.8	0.262	0.262	0.207	0.207	
						25	12	23.8	23.8	0.215	0.215	0.170	0.170	
			Left Tilt	23095	707.5	1	24	24.8	24.8	0.094	0.094	0.076	0.076	
						25	12	23.8	23.8	0.075	0.075	0.061	0.061	
			Right Touch	23095	707.5	1	24	24.8	24.8	0.241	0.241	0.185	0.185	
						25	12	23.8	23.8	0.197	0.197	0.149	0.149	
Body-worn & Hotspot	QPSK	5	Right Tilt	23095	707.5	1	24	24.8	24.8	0.099	0.099	0.079	0.079	21
						25	12	23.8	23.8	0.080	0.080	0.064	0.064	
			Rear	23095	707.5	1	24	24.8	24.8	0.786	0.786	0.448	0.448	
						25	12	23.8	23.8	0.643	0.643	0.366	0.366	
			Front	23095	707.5	1	24	24.8	24.8	0.658	0.658	0.379	0.379	
						25	12	23.8	23.8	0.538	0.538	0.309	0.309	
Hotspot	QPSK	5	Edge 2	23095	707.5	1	24	24.8	24.8	0.282	0.282	0.187	0.187	
						25	12	23.8	23.8	0.231	0.231	0.153	0.153	
			Edge 3	23095	707.5	1	24	24.8	24.8	0.418	0.418	0.203	0.203	
						25	12	23.8	23.8	0.341	0.341	0.165	0.165	
			Edge 4	23095	707.5	1	24	24.8	24.8	0.536	0.536	0.366	0.366	
						25	12	23.8	23.8	0.439	0.439	0.300	0.300	

10.14. LTE Band 13 (10MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	23230	782.0	1	24	23.3	23.3	0.709	0.709	0.519	0.519	22
						25	12	22.3	22.3	0.574	0.574	0.420	0.420	
			Left Tilt	23230	782.0	1	24	23.3	23.3	0.518	0.518	0.321	0.321	
						25	12	22.3	22.3	0.417	0.417	0.259	0.259	
			Right Touch	23230	782.0	1	24	23.3	23.3	0.840	0.840	0.495	0.495	
						25	12	22.3	22.3	0.683	0.683	0.402	0.402	
Body-worn & Hotspot	QPSK	5	Rear	23230	782.0	1	24	23.3	23.3	0.461	0.461	0.270	0.270	
						25	12	22.3	22.3	0.375	0.375	0.223	0.223	
			Front	23230	782.0	1	24	23.3	23.3	0.446	0.446	0.249	0.249	
						25	12	22.3	22.3	0.361	0.361	0.201	0.201	
			Edge 1	23230	782.0	1	24	23.3	23.3	0.225	0.225	0.119	0.119	
						25	12	22.3	22.3	0.203	0.203	0.095	0.095	
Hotspot	QPSK	5	Edge 2	23230	782.0	1	24	23.3	23.3	0.545	0.545	0.363	0.363	
						25	12	22.3	22.3	0.439	0.439	0.292	0.292	
			Edge 4	23230	782.0	1	24	23.3	23.3	0.285	0.285	0.189	0.189	
						25	12	22.3	22.3	0.228	0.228	0.151	0.151	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	23230	782.0	1	24	24.8	24.8	0.372	0.372	0.287	0.287	
						25	12	23.8	23.8	0.299	0.299	0.230	0.230	
			Left Tilt	23230	782.0	1	24	24.8	24.8	0.125	0.125	0.098	0.098	
						25	12	23.8	23.8	0.104	0.104	0.081	0.081	
			Right Touch	23230	782.0	1	24	24.8	24.8	0.322	0.322	0.245	0.245	
						25	12	23.8	23.8	0.260	0.260	0.198	0.198	
Body-worn & Hotspot	QPSK	5	Right Tilt	23230	782.0	1	24	24.8	24.8	0.162	0.162	0.112	0.112	23
						25	12	23.8	23.8	0.129	0.129	0.090	0.090	
			Rear	23230	782.0	1	24	24.8	24.8	0.883	0.883	0.489	0.489	
						25	12	23.8	23.8	0.717	0.717	0.397	0.397	
			Front	23230	782.0	1	24	24.8	24.8	0.806	0.806	0.449	0.449	
						25	12	23.8	23.8	0.650	0.650	0.362	0.362	
Hotspot	QPSK	5	Edge 2	23230	782.0	1	24	24.8	24.8	0.273	0.273	0.180	0.180	
						25	12	23.8	23.8	0.217	0.217	0.143	0.143	
			Edge 3	23230	782.0	1	24	24.8	24.8	0.558	0.558	0.269	0.269	
						25	12	23.8	23.8	0.450	0.450	0.216	0.216	
			Edge 4	23230	782.0	1	24	24.8	24.8	0.882	0.882	0.587	0.587	
						25	12	23.8	23.8	0.728	0.728	0.483	0.483	

10.15. LTE Band 17 (10MHz Bandwidth)

SAR for LTE Band 17 (Frequency range: 704 – 716 MHz) is covered by LTE Band 12 (Frequency range: 699 – 716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10.16. LTE Band 25 (20MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	26365	1882.5	1	49	17.5	17.1	0.331	0.363	0.192	0.211	
						50	24	17.5	17.1	0.335	0.367	0.195	0.214	
			Left Tilt	26365	1882.5	1	49	17.5	17.1	0.261	0.286	0.154	0.169	
						50	24	17.5	17.1	0.263	0.288	0.155	0.170	
			Right Touch	26140	1860.0	1	49	17.5	17.1	0.854	0.936	0.462	0.507	
						50	24	17.5	17.1	0.796	0.873	0.429	0.470	
				26365	1882.5	1	49	17.5	17.1	0.853	0.935	0.452	0.496	
						50	24	17.5	17.1	0.868	0.952	0.465	0.510	
						100	0	17.5	17.1	0.800	0.877	0.426	0.467	
				26590	1905.0	1	49	17.5	17.1	0.938	1.028	0.503	0.552	
						50	24	17.5	17.1	0.964	1.057	0.516	0.566	24
			Right Tilt	26365	1882.5	1	49	17.5	17.1	0.560	0.614	0.300	0.329	
						50	24	17.5	17.1	0.574	0.629	0.304	0.333	
Body-worn & Hotspot	QPSK	5	Rear	26140	1860.0	1	49	19.3	19.0	0.796	0.853	0.398	0.426	
						50	24	19.3	19.0	0.802	0.859	0.402	0.431	
				26365	1882.5	1	49	19.3	19.1	0.843	0.883	0.427	0.447	
						50	24	19.3	19.1	0.790	0.827	0.395	0.414	
				26590	1905.0	1	49	19.3	19.3	0.861	0.861	0.434	0.434	
						50	24	19.3	19.3	0.886	0.886	0.447	0.447	
			Front	26140	1860.0	1	49	19.3	19.0	0.743	0.796	0.370	0.396	
						50	24	19.3	19.0	0.757	0.811	0.374	0.401	
				26365	1882.5	1	49	19.3	19.1	0.746	0.781	0.371	0.388	
						50	24	19.3	19.1	0.755	0.791	0.380	0.398	
				26590	1905.0	1	49	19.3	19.3	0.775	0.812	0.388	0.406	
						50	24	19.3	19.3	0.776	0.776	0.389	0.389	
			Edge 1	26365	1882.5	1	49	19.3	19.1	0.779	0.816	0.368	0.385	
						50	24	19.3	19.1	0.803	0.841	0.373	0.391	
			Edge 2	26365	1882.5	1	49	19.3	19.1	0.774	0.810	0.353	0.370	
						50	24	19.3	19.1	0.820	0.859	0.376	0.394	
			Edge 4	26140	1860.0	1	49	19.3	19.0	0.748	0.801	0.346	0.371	
						50	24	19.3	19.0	0.804	0.862	0.366	0.392	
				26365	1882.5	1	49	19.3	19.1	0.840	0.880	0.380	0.398	
						50	24	19.3	19.1	0.026	0.027	0.012	0.012	
				26590	1905.0	1	49	19.3	19.3	0.026	0.027	0.013	0.014	
						50	24	19.3	19.3	0.659	0.659	0.351	0.351	
						50	24	19.3	19.3	0.687	0.687	0.364	0.364	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	26365	1882.5	1	49	24.3	24.0	0.412	0.441	0.269	0.288	
						50	24	24.3	23.1	0.326	0.430	0.213	0.281	
			Left Tilt	26365	1882.5	1	49	24.3	24.0	0.207	0.222	0.123	0.132	
						50	24	24.3	23.1	0.161	0.212	0.096	0.127	
			Right Touch	26140	1860.0	1	49	24.3	24.0	0.764	0.819	0.470	0.504	
						50	24	24.3	23.2	0.542	0.698	0.336	0.433	
				26365	1882.5	1	49	24.3	24.0	0.833	0.893	0.506	0.542	
						50	24	24.3	23.1	0.660	0.870	0.401	0.529	
						100	0	24.3	23.3	0.579	0.729	0.357	0.449	
				26590	1905.0	1	49	24.3	24.0	0.917	0.983	0.556	0.596	
						50	24	24.3	23.3	0.675	0.850	0.414	0.521	
			Right Tilt	26365	1882.5	1	49	24.3	24.0	0.284	0.304	0.159	0.170	
						50	24	24.3	23.1	0.222	0.293	0.126	0.166	
Body-worn & Hotspot	QPSK	5	Rear	26140	1860.0	1	49	19.8	19.6	0.741	0.776	0.357	0.374	
						50	24	19.8	19.6	0.782	0.819	0.378	0.396	
				26365	1882.5	1	49	19.8	19.8	0.814	0.814	0.390	0.390	
						50	24	19.8	19.8	0.829	0.829	0.399	0.399	
						100	0	19.8	19.8	1.050	1.050	0.492	0.492	25
				26590	1905.0	1	49	19.8	19.8	0.913	0.913	0.436	0.436	
						50	24	19.8	19.8	0.931	0.931	0.447	0.447	
			Front	26140	1860.0	1	49	19.8	19.6	0.745	0.780	0.373	0.391	
						50	24	19.8	19.6	0.751	0.786	0.377	0.395	
				26365	1882.5	1	49	19.8	19.8	0.795	0.795	0.397	0.397	
						50	24	19.8	19.8	0.802	0.802	0.399	0.399	
						100	0	19.8	19.8	0.814	0.814	0.406	0.406	
				26590	1905.0	1	49	19.8	19.8	0.852	0.852	0.425	0.425	
						50	24	19.8	19.8	0.854	0.854	0.430	0.430	
Hotspot	QPSK	5	Edge 2	26365	1882.5	1	49	19.8	19.8	0.513	0.513	0.277	0.277	
						50	24	19.8	19.8	0.560	0.560	0.302	0.302	
			Edge 3	26140	1860.0	1	49	19.8	19.6	0.971	1.017	0.447	0.468	
						50	24	19.8	19.6	0.903	0.946	0.416	0.436	
				26365	1882.5	1	49	19.8	19.8	0.906	0.906	0.420	0.420	
						50	24	19.8	19.8	0.977	0.977	0.447	0.447	
						100	0	19.8	19.8	0.929	0.929	0.427	0.427	
				26590	1905.0	1	49	19.8	19.8	0.928	0.928	0.418	0.418	
						50	24	19.8	19.8	0.940	0.940	0.423	0.423	
			Edge 4	26365	1882.5	1	49	19.8	19.8	0.053	0.053	0.028	0.028	
						50	24	19.8	19.8	0.053	0.053	0.029	0.029	

10.17. LTE Band 26 (10MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	26740	819.0	1	24	23.3	23.3	0.747	0.747	0.563	0.563	26
				26865	831.5	1	24	23.3	23.3	0.834	0.834	0.623	0.623	
						25	12	22.3	22.3	0.676	0.676	0.504	0.504	
			Left Tilt	26990	844.0	1	24	23.3	23.3	0.880	0.880	0.655	0.655	
				26865	831.5	1	24	23.3	23.3	0.644	0.644	0.371	0.371	
						25	12	22.3	22.3	0.508	0.508	0.294	0.294	
			Right Touch	26740	819.0	1	24	23.3	23.3	0.780	0.780	0.492	0.492	
				26865	831.5	1	24	23.3	23.3	0.880	0.880	0.548	0.548	
						25	12	22.3	22.3	0.708	0.708	0.439	0.439	
			Right Tilt	26990	844.0	1	24	23.3	23.3	0.939	0.939	0.578	0.578	
				26865	831.5	1	24	23.3	23.3	0.675	0.675	0.378	0.378	
						25	12	22.3	22.3	0.533	0.533	0.298	0.298	
Body-worn & Hotspot	QPSK	5	Rear	26865	831.5	1	24	23.3	23.3	0.486	0.486	0.313	0.313	
						25	12	22.3	22.3	0.388	0.388	0.253	0.253	
			Front	26865	831.5	1	24	23.3	23.3	0.399	0.399	0.265	0.265	
						25	12	22.3	22.3	0.314	0.314	0.203	0.203	
						1	24	23.3	23.3	0.117	0.117	0.057	0.057	
						25	12	22.3	22.3	0.091	0.091	0.044	0.044	
Hotspot	QPSK	5	Edge 1	26865	831.5	1	24	23.3	23.3	0.517	0.517	0.336	0.336	
						25	12	22.3	22.3	0.411	0.411	0.267	0.267	
			Edge 2	26865	831.5	1	24	23.3	23.3	0.241	0.241	0.156	0.156	
						25	12	22.3	22.3	0.193	0.193	0.124	0.124	
			Edge 4	26865	831.5	1	24	23.3	23.3	0.117	0.117	0.057	0.057	
						25	12	22.3	22.3	0.091	0.091	0.044	0.044	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	26865	831.5	1	24	24.8	24.8	0.374	0.374	0.287	0.287	
						25	12	23.8	23.8	0.300	0.300	0.229	0.229	
			Left Tilt	26865	831.5	1	24	24.8	24.8	0.092	0.092	0.074	0.074	
						25	12	23.8	23.8	0.076	0.076	0.060	0.060	
			Right Touch	26865	831.5	1	24	24.8	24.8	0.308	0.308	0.235	0.235	
						25	12	23.8	23.8	0.245	0.245	0.187	0.187	
			Right Tilt	26865	831.5	1	24	24.8	24.8	0.124	0.124	0.099	0.099	
						25	12	23.8	23.8	0.101	0.101	0.081	0.081	
Body-worn & Hotspot	QPSK	5	Rear	26865	831.5	1	24	24.8	24.8	0.746	0.746	0.438	0.438	27
						25	12	23.8	23.8	0.590	0.590	0.346	0.346	
			Front	26740	819.0	1	24	24.8	24.8	0.529	0.529	0.303	0.303	
				26865	831.5	1	24	24.8	24.8	0.789	0.789	0.441	0.441	
						25	12	23.8	23.8	0.639	0.639	0.356	0.356	
				26990	844.0	1	24	24.8	24.8	0.662	0.662	0.381	0.381	
Hotspot	QPSK	5	Edge 2	26865	831.5	1	24	24.8	24.8	0.187	0.187	0.121	0.121	
						25	12	23.8	23.8	0.148	0.148	0.096	0.096	
			Edge 3	26865	831.5	1	24	24.8	24.8	0.374	0.374	0.179	0.179	
						25	12	23.8	23.8	0.312	0.312	0.147	0.147	
			Edge 4	26865	831.5	1	24	24.8	24.8	0.554	0.554	0.364	0.364	
						25	12	23.8	23.8	0.445	0.445	0.292	0.292	

10.18. LTE Band 30 (10MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	27710	2310.0	1	24	16.5	16.5	0.433	0.433	0.206	0.206	
						25	12	16.5	16.5	0.396	0.396	0.189	0.189	
			Left Tilt	27710	2310.0	1	24	16.5	16.5	0.470	0.470	0.208	0.208	
						25	12	16.5	16.5	0.436	0.436	0.196	0.196	
			Right Touch	27710	2310.0	1	24	16.5	16.5	0.954	0.954	0.447	0.447	
						25	12	16.5	16.5	0.905	0.905	0.421	0.421	
						50	0	16.5	16.5	1.030	1.030	0.465	0.465	
			Right Tilt	27710	2310.0	1	24	16.5	16.5	1.040	1.040	0.424	0.424	
						25	12	16.5	16.5	1.040	1.040	0.430	0.430	
						50	0	16.5	16.5	1.050	1.050	0.436	0.436	28
Body-worn & Hotspot	QPSK	5	Rear	27710	2310.0	1	24	18.5	18.1	0.794	0.871	0.359	0.394	
						25	12	18.5	18.1	0.805	0.883	0.365	0.400	
						50	0	18.5	18.1	0.801	0.878	0.365	0.400	
			Front	27710	2310.0	1	24	18.5	18.1	0.680	0.746	0.312	0.342	
						25	12	18.5	18.1	0.707	0.775	0.323	0.354	
						50	0	18.5	18.1	0.707	0.775	0.323	0.354	
Hotspot	QPSK	5	Edge 1	27710	2310.0	1	24	18.5	18.1	0.607	0.666	0.215	0.236	
						25	12	18.5	18.1	0.629	0.690	0.221	0.242	
			Edge 2	27710	2310.0	1	24	18.5	18.1	0.117	0.128	0.057	0.062	
						25	12	18.5	18.1	0.118	0.129	0.058	0.064	
			Edge 4	27710	2310.0	1	24	18.5	18.1	0.531	0.582	0.257	0.282	
						25	12	18.5	18.1	0.543	0.595	0.263	0.288	
						1	24	18.5	18.1	0.531	0.582	0.257	0.282	
						25	12	18.5	18.1	0.543	0.595	0.263	0.288	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	27710	2310.0	1	24	23.8	23.8	0.354	0.354	0.204	0.204	
						25	12	22.8	22.8	0.367	0.367	0.212	0.212	
			Left Tilt	27710	2310.0	1	24	23.8	23.8	0.205	0.205	0.114	0.114	
						25	12	22.8	22.8	0.210	0.210	0.116	0.116	
			Right Touch	27710	2310.0	1	24	23.8	23.8	0.372	0.372	0.215	0.215	
						25	12	22.8	22.8	0.380	0.380	0.220	0.220	
			Right Tilt	27710	2310.0	1	24	23.8	23.8	0.213	0.213	0.114	0.114	
						25	12	22.8	22.8	0.206	0.206	0.114	0.114	
Body-worn & Hotspot	QPSK	5	Rear	27710	2310.0	1	24	21.8	21.8	1.080	1.080	0.432	0.432	29
						25	12	21.8	21.8	1.080	1.080	0.432	0.432	
						50	0	21.8	21.8	1.080	1.080	0.430	0.430	
			Front	27710	2310.0	1	24	21.8	21.8	1.020	1.020	0.429	0.429	
						25	12	21.8	21.8	0.992	0.992	0.384	0.384	
						50	0	21.8	21.8	1.030	1.030	0.434	0.434	
			Edge 2	27710	2310.0	1	24	21.8	21.8	0.522	0.522	0.248	0.248	
						25	12	21.8	21.8	0.530	0.530	0.252	0.252	
Hotspot	QPSK	5	Edge 3	27710	2310.0	1	24	21.8	21.8	0.696	0.696	0.240	0.240	
						25	12	21.8	21.8	0.770	0.770	0.262	0.262	
			Edge 4	27710	2310.0	1	24	21.8	21.8	0.736	0.736	0.363	0.363	
						25	12	21.8	21.8	0.751	0.751	0.369	0.369	
						1	24	21.8	21.8	0.736	0.736	0.363	0.363	
						25	12	21.8	21.8	0.751	0.751	0.369	0.369	

10.19. LTE Band 41 (20MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	40620	2593.0	1	49	17.3	17.1	0.560	0.586	0.221	0.231	30
						50	24	17.3	17.2	0.580	0.594	0.231	0.236	
			Left Tilt	40620	2593.0	1	49	17.3	17.1	0.596	0.624	0.215	0.225	
						50	24	17.3	17.2	0.611	0.625	0.220	0.225	
			Right Touch	40620	2593.0	1	49	17.3	17.1	0.277	0.290	0.107	0.112	
						50	24	17.3	17.2	0.286	0.293	0.110	0.113	
			Right Tilt	40620	2593.0	1	49	17.3	17.1	0.296	0.310	0.113	0.118	
						50	24	17.3	17.2	0.296	0.303	0.113	0.116	
Body-worn & Hotspot	QPSK	5	Rear	40620	2593.0	1	49	20.0	20.0	0.735	0.735	0.338	0.338	
						50	24	19.3	19.2	0.470	0.481	0.215	0.220	
			Front	40620	2593.0	1	49	20.0	20.0	0.735	0.735	0.300	0.300	
						50	24	19.3	19.2	0.653	0.668	0.268	0.274	
Hotspot	QPSK	5	Edge 1	40620	2593.0	1	49	20.0	20.0	0.381	0.381	0.141	0.141	
						50	24	19.3	19.2	0.297	0.304	0.109	0.112	
			Edge 2	40620	2593.0	1	49	20.0	20.0	0.599	0.599	0.275	0.275	
						50	24	19.3	19.2	0.481	0.492	0.221	0.226	
			Edge 4	40620	2593.0	1	49	20.0	20.0	0.142	0.142	0.066	0.066	
						50	24	19.3	19.2	0.093	0.095	0.043	0.044	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	40620	2593.0	1	49	25.3	25.3	0.535	0.535	0.281	0.281	
						50	24	24.3	24.3	0.576	0.576	0.299	0.299	
			Left Tilt	40620	2593.0	1	49	25.3	25.3	0.078	0.078	0.045	0.045	
						50	24	24.3	24.3	0.080	0.080	0.046	0.046	
			Right Touch	40620	2593.0	1	49	25.3	25.3	0.247	0.247	0.134	0.134	
						50	24	24.3	24.3	0.247	0.247	0.133	0.133	
			Right Tilt	40620	2593.0	1	49	25.3	25.3	0.102	0.102	0.050	0.050	
						50	24	24.3	24.3	0.105	0.105	0.051	0.051	
Body-worn & Hotspot	QPSK	5	Rear	39750	2506.0	1	49	20.5	20.0	0.839	0.941	0.333	0.374	
						50	24	20.5	20.0	0.865	0.971	0.340	0.381	
				40185	2549.5	1	49	20.5	20.0	0.813	0.912	0.371	0.416	
						50	24	20.5	20.0	0.823	0.923	0.375	0.421	
				40620	2593.0	1	49	20.5	20.0	0.962	1.079	0.464	0.521	31
						50	24	20.5	20.0	0.872	0.978	0.414	0.465	
						100	0	20.5	20.0	0.800	0.898	0.371	0.416	
				41055	2636.5	1	49	20.5	20.0	0.698	0.783	0.335	0.376	
						50	24	20.5	20.0	0.720	0.808	0.345	0.387	
				41490	2680.0	1	49	20.5	20.0	0.582	0.653	0.256	0.287	
						50	24	20.5	20.0	0.575	0.645	0.280	0.314	
			Front	39750	2506.0	1	49	20.5	20.0	0.724	0.812	0.283	0.318	
						50	24	20.5	20.0	0.750	0.842	0.292	0.328	
				40185	2549.5	1	49	20.5	20.0	0.831	0.932	0.325	0.365	
						50	24	20.5	20.0	0.848	0.951	0.332	0.373	
				40620	2593.0	1	49	20.5	20.0	0.814	0.913	0.322	0.361	
						50	24	20.5	20.0	0.844	0.947	0.331	0.371	
						100	0	20.5	20.0	0.843	0.946	0.331	0.371	
				41055	2636.5	1	49	20.5	20.0	0.688	0.772	0.270	0.303	
						50	24	20.5	20.0	0.774	0.868	0.300	0.337	
				41490	2680.0	1	49	20.5	20.0	0.601	0.674	0.236	0.265	
						50	24	20.5	20.0	0.613	0.688	0.240	0.269	
Hotspot	QPSK	5	Edge 2	40620	2593.0	1	49	20.5	20.0	0.029	0.033	0.015	0.017	
						50	24	20.5	20.0	0.029	0.033	0.014	0.016	
			Edge 3	40620	2593.0	1	49	20.5	20.0	0.521	0.585	0.184	0.206	
						50	24	20.5	20.0	0.500	0.561	0.180	0.202	
			Edge 4	40620	2593.0	1	49	20.5	20.0	0.522	0.586	0.243	0.273	
						50	24	20.5	20.0	0.533	0.598	0.247	0.277	

10.20. LTE Band 66 (20MHz Bandwidth)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	132322	1745.0	1	49	18.0	17.5	0.423	0.475	0.265	0.297	
						50	24	18.0	17.5	0.429	0.481	0.268	0.301	
			Left Tilt	132322	1745.0	1	49	18.0	17.5	0.373	0.419	0.223	0.250	
						50	24	18.0	17.5	0.374	0.420	0.226	0.254	
			Right Touch	132072	1720.0	1	49	18.0	17.5	0.684	0.767	0.390	0.438	
						50	24	18.0	17.5	0.760	0.853	0.443	0.497	
				132322	1745.0	1	49	18.0	17.5	0.786	0.882	0.456	0.512	
						50	24	18.0	17.5	0.817	0.917	0.472	0.530	32
						100	0	18.0	17.5	0.784	0.880	0.457	0.513	
				132572	1770.0	1	49	18.0	17.5	0.716	0.803	0.414	0.465	
						50	24	18.0	17.5	0.740	0.830	0.427	0.479	
			Right Tilt	132322	1720.0	1	49	18.0	17.5	0.608	0.682	0.353	0.396	
						50	24	18.0	17.5	0.554	0.622	0.320	0.359	
Body-worn & Hotspot	QPSK	5	Rear	132322	1745.0	1	49	18.8	18.5	0.587	0.629	0.314	0.336	
						50	24	18.8	18.5	0.613	0.657	0.325	0.348	
			Front	132322	1745.0	1	49	18.8	18.5	0.470	0.504	0.252	0.270	
						50	24	18.8	18.5	0.527	0.565	0.273	0.293	
Hotspot	QPSK	5	Edge 1	132072	1720.0	1	49	18.8	18.5	0.759	0.813	0.366	0.392	
						50	24	18.8	18.5	0.770	0.825	0.373	0.400	
				132322	1745.0	1	49	18.8	18.5	0.775	0.830	0.377	0.404	
						50	24	18.8	18.5	0.811	0.869	0.395	0.423	
						100	0	18.8	18.5	0.788	0.844	0.382	0.409	
				132572	1770.0	1	49	18.8	18.5	0.776	0.831	0.381	0.408	
						50	24	18.8	18.5	0.786	0.842	0.386	0.414	
			Edge 2	132322	1745.0	1	49	18.8	18.5	0.023	0.025	0.014	0.015	
						50	24	18.8	18.5	0.021	0.023	0.013	0.014	
			Edge 4	132322	1745.0	1	49	18.8	18.5	0.455	0.488	0.252	0.270	
						50	24	18.8	18.5	0.500	0.536	0.273	0.293	

LAT 1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	QPSK	0	Left Touch	132322	1745.0	1	49	24.8	24.7	0.336	0.344	0.232	0.237	
						50	24	23.8	23.7	0.273	0.279	0.189	0.193	
			Left Tilt	132322	1745.0	1	49	24.8	24.7	0.186	0.190	0.101	0.103	
						50	24	23.8	23.7	0.149	0.152	0.081	0.083	
			Right Touch	132322	1745.0	1	49	24.8	24.7	0.644	0.659	0.414	0.424	
						50	24	23.8	23.7	0.519	0.531	0.332	0.340	
			Right Tilt	132322	1745.0	1	49	24.8	24.7	0.156	0.160	0.090	0.092	
						50	24	23.8	23.7	0.125	0.128	0.072	0.073	
Body-worn & Hotspot	QPSK	5	Rear	132072	1720.0	1	49	20.3	20.0	0.742	0.795	0.386	0.414	
						50	24	20.3	20.0	0.764	0.819	0.398	0.426	
				132322	1745.0	1	49	20.3	20.0	0.716	0.767	0.368	0.394	
						50	24	20.3	20.0	0.846	0.907	0.433	0.464	
				132572	1770.0	100	0	20.3	20.0	0.834	0.894	0.426	0.456	
						1	49	20.3	20.0	0.864	0.926	0.436	0.467	
			Front	132322	1745.0	50	24	20.3	20.0	0.881	0.944	0.445	0.477	33
						1	49	20.3	20.0	0.591	0.633	0.318	0.341	
				132322	1745.0	50	24	20.3	20.0	0.679	0.728	0.353	0.378	
						1	49	20.3	20.0	0.340	0.364	0.191	0.205	
Hotspot	QPSK	5	Edge 2	132322	1745.0	50	24	20.3	20.0	0.383	0.410	0.212	0.227	
						1	49	20.3	20.0	0.797	0.854	0.388	0.416	
			Edge 3	132072	1720.0	50	24	20.3	20.0	0.819	0.878	0.398	0.426	
						1	49	20.3	20.0	0.883	0.946	0.428	0.459	34
				132322	1745.0	50	24	20.3	20.0	0.840	0.900	0.409	0.438	
						100	0	20.3	20.0	0.861	0.923	0.420	0.450	
				132572	1770.0	1	49	20.3	20.0	0.816	0.874	0.400	0.429	
						50	24	20.3	20.0	0.834	0.894	0.406	0.435	
			Edge 4	132322	1745.0	1	49	20.3	20.0	0.040	0.043	0.024	0.026	
						50	24	20.3	20.0	0.041	0.044	0.024	0.026	

10.21. LTE-uplink 2CA Band 7 (20MHz + 20MHz BW)

SAR Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

RF Exposure Conditions	Power Mode	Mode	Antenna	Dist. (mm)	Test Position	PCC				SCC				Power (dBm)			1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	MPR	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	A	QPSK	UAT	0	Left Touch	20850	2510.0	1	99	21048	2529.8	1	0	0	15.3	15.0	0.821	0.880	0.317	0.340	
Head	A	QPSK	LAT	0	Left Touch	21350	2560.0	1	0	21152	2540.2	1	99	0	23.8	23.8	1.110	1.110	0.567	0.567	35

Notes:

- From FCC PAG Guidance and Manufacturer KDB inquiry - Carrier Aggregation: PCC channel was determined and selected closest to the worst case SAR configuration from standalone reported SAR result. PCC and SCC channels were determined and selected to allow contiguous CA. RB allocations and offsets were selected to allow maximum measured output power. Output power was measured and verified for these test cases.

10.22. LTE-uplink 2CA Band 41 (20MHz + 20MHz BW)

SAR Testing was performed on each antenna – UAT 1 and LAT 1 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

RF Exposure Conditions	Power Mode	Mode	Antenna	Dist. (mm)	Test Position	PCC				SCC				Power (dBm)			1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	MPR	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Body-worn	B	QPSK	UAT	0	Rear	40620	2593.0	1	99	40818	2612.8	1	0	0	19.3	19.3	0.678	0.678	0.302	0.302	
Body-worn	B	QPSK	LAT	5	Rear	40620	2593.0	1	0	40422	2573.2	1	99	0	20.5	20.0	0.988	1.109	0.402	0.451	36

Notes:

- From FCC PAG Guidance and Manufacturer KDB inquiry - Carrier Aggregation: PCC channel was determined and selected closest to the worst case SAR configuration from standalone reported SAR result. PCC and SCC channels were determined and selected to allow contiguous CA. RB allocations and offsets were selected to allow maximum measured output power. Output power was measured and verified for these test cases.

10.23. Wi-Fi (DTS Band)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed for each power configuration for Wi-Fi: Cell On and Cell Off and for each Antenna – UAT 1 and LAT 3 –using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Cell On

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
								UAT 1		LAT 3			UAT 1				LAT 3				
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	
2.4 GHz	Head	802.11b 20MHz	0	1 Tx	Left Touch	6	2437	9.5	9.5			0.553	0.346	0.127	0.346	0.127					
					Left Tilt	6	2437	9.5	9.5			0.380									
					Right Touch	6	2437	9.5	9.5			0.328									
					Right Tilt	6	2437	9.5	9.5			0.384									
					Left Touch	6	2437			18.0	18.0	0.149									
					Left Tilt	6	2437			18.0	18.0	0.071									
					Right Touch	6	2437			18.0	18.0	0.322				0.232	0.122	0.232	0.122		
					Right Tilt	6	2437			18.0	18.0	0.077									
		802.11g 20MHz	0	2 Tx	Left Touch	6	2437	9.5	9.5	18.0	18.0	0.514									
					Left Tilt	6	2437	9.5	9.5	18.0	18.0	0.384									
					Right Touch	6	2437	9.5	9.5	18.0	18.0	0.289	0.316	0.118	0.316	0.118	0.094	0.048	0.094	0.048	
					Right Tilt	6	2437	9.5	9.5	18.0	18.0	0.311									
	Body-worn & Hotspot	802.11b 20MHz	5	1 Tx	Rear	6	2437	15.0	15.0			0.393	0.380	0.146	0.380	0.146					
					Front	6	2437	15.0	15.0			0.802	0.533	0.199	0.533	0.199					
					Edge 1	6	2437	15.0	15.0			0.346									
					Edge 2	6	2437	15.0	15.0			0.257									
					Edge 4	6	2437	15.0	15.0			0.099									
					Rear	6	2437			13.5	13.5	0.165									
					Front	6	2437			13.5	13.5	0.414				0.290	0.129	0.290	0.129		
					Edge 2	6	2437			13.5	13.5	0.083									
					Edge 3	6	2437			13.5	13.5	0.092									
					Edge 4	6	2437			13.5	13.5	0.089									
		802.11g 20MHz	5	2 Tx	Rear	6	2437	15.0	15.0	13.5	13.5	0.726	0.417	0.163	0.417	0.163	0.305	0.139	0.305	0.139	
					Front	6	2437	15.0	15.0	13.5	13.5	0.675	0.459	0.173	0.459	0.173	0.292	0.130	0.292	0.130	
					Edge 1	6	2437	15.0	15.0	13.5	13.5	0.347									
					Edge 2	6	2437	15.0	15.0	13.5	13.5	0.225									
					Edge 3	6	2437	15.0	15.0	13.5	13.5	0.118									
					Edge 4	6	2437	15.0	15.0	13.5	13.5	0.097									

Notes:

For SAR results with "-", there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Cell Off

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots	
								UAT 1		LAT 3			UAT 1				LAT 3					
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled			
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g		
2.4 GHz	Head	802.11b 20MHz	0	1 Tx	Left Touch	6	2437	14.8	14.8			1.380	1.020	0.382	1.020	0.382						
						11	2462	14.8	14.8			1.080	0.760	0.288	0.760	0.288						
					Left Tilt	6	2437	14.8	14.8			1.790	1.170	0.413	1.170	0.413					37	
						11	2462	14.8	14.8			1.310	1.090	0.386	1.090	0.386						
					Right Touch	6	2437	14.8	14.8			1.120	0.795	0.328	0.795	0.328						
						11	2462	14.8	14.8			0.938	0.662	0.274	0.662	0.274						
					Right Tilt	6	2437	14.8	14.8			1.120	0.812	0.324	0.812	0.324						
						11	2462	14.8	14.8			1.240	0.829	0.329	0.829	0.329						
		802.11g 20MHz	0	2 Tx	Left Touch	6	2437			21.5	21.4	0.288					0.253	0.131	0.259	0.134		
						6	2437			21.5	21.4	0.139										
					Left Tilt	6	2437			21.5	21.4	0.722					0.572	0.300	0.585	0.307		
						6	2437			21.5	21.4	0.169										
					Right Touch	6	2437			21.5	21.4	1.130	0.838	0.321	0.838	0.321	0.231	0.121	0.231	0.121		
						8	2447			21.0	21.0	1.370	0.869	0.327	0.869	0.327	0.200	0.106	0.200	0.106		
					Right Tilt	6	2437			21.0	21.0	1.610	1.080	0.390	1.080	0.390						
						8	2447			21.0	21.0	1.710	1.050	0.382	1.050	0.382						
	Body-worn & Hotspot	802.11b 20MHz	5	1 Tx	Rear	6	2437	18.3	18.3			1.210	1.060	0.401	1.060	0.401						
						11	2462	18.3	18.3			0.624	0.662	0.254	0.662	0.254						
					Front	6	2437	18.3	18.3			1.190	1.070	0.409	1.070	0.409					38	
						11	2462	18.3	18.3			0.947	0.745	0.283	0.745	0.283						
					Edge 1	6	2437	18.3	18.3			0.903										
					Edge 2	6	2437	18.3	18.3			0.708										
					Edge 4	6	2437	18.3	18.3			0.407	0.780	0.262	0.780	0.262						
					Rear	6	2437			18.8	18.8	0.603					0.427	0.206	0.427	0.206		
					Front	6	2437			18.8	18.8	0.841					0.755	0.346	0.755	0.346		
					Edge 2	6	2437			18.8	18.8	0.409										
					Edge 3	6	2437			18.8	18.8	0.430										
					Edge 4	6	2437			18.8	18.8	0.174										
		802.11g 20MHz	5	2 Tx	Rear	6	2437	18.3	18.3		18.8	18.8	0.944	0.778	0.293	0.778	0.293	0.358	0.179	0.358	0.179	
						9	2452	18.3	18.3		18.8	18.8	1.070	0.842	0.319	0.842	0.319	0.407	0.193	0.407	0.193	
					Front	6	2437	18.3	18.3		18.8	18.8	1.150	0.785	0.350	0.785	0.350	0.818	0.315	0.818	0.315	
						9	2452	18.3	18.3		18.8	18.8	1.150	0.929	0.352	0.929	0.352	0.571	0.266	0.571	0.266	
					Edge 1	6	2437	18.3	18.3		18.8	18.8	0.529									
					Edge 2	6	2437	18.3	18.3		18.8	18.8	0.719	0.516	0.248	0.516	0.248	0.441	0.214	0.441	0.214	
					Edge 3	6	2437	18.3	18.3		18.8	18.8	0.299									
					Edge 4	6	2437	18.3	18.3		18.8	18.8	0.376									

Notes:

For SAR results with “-“, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

10.24. Wi-Fi (U-NII-1 and U-NII-2A Band)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed for each power configuration for Wi-Fi: Cell On and Cell Off and for each Antenna – UAT 2 and LAT 3 –using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Cell On

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
								UAT 2		LAT 3			UAT 2				LAT 3				
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	
5.2 GHz	Head	802.11ac VHT80	0	1 Tx	Left Touch	42	5210	7.3	7.3			0.180									
					Left Tilt	42	5210	7.3	7.3			0.147									
					Right Touch	42	5210	7.3	7.3			0.346	0.188	0.056	0.188	0.056					
					Right Tilt	42	5210	7.3	7.3			0.335									
5.3 GHz		802.11a	0	1 Tx	Left Touch	56	5280			19.8	19.8	0.300									
					Left Tilt	56	5280			19.8	19.8	0.111									
					Right Touch	56	5280			19.8	19.8	0.329				0.203	0.075	0.203	0.075		
					Right Tilt	56	5280			19.8	19.8	0.109									
5.2 GHz		802.11n HT40	0	2 Tx	Left Touch	38	5190	7.3	7.3	19.5	19.5	0.322									
					Left Tilt	38	5190	7.3	7.3	19.5	19.5	0.187									
					Right Touch	38	5190	7.3	7.3	19.5	19.5	0.361	0.138	0.041	0.138	0.041	0.222	0.085	0.222	0.085	
					Right Tilt	38	5190	7.3	7.3	19.5	19.5	0.334									
5.2 GHz	Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Rear	42	5210	14.0	14.0			0.393									
					Front	42	5210	14.0	14.0			0.625	0.320	0.112	0.320	0.112					
					Edge 1	42	5210	14.0	14.0			0.364									
					Edge 2	42	5210	14.0	14.0			0.097									
					Edge 4	42	5210	14.0	14.0			0.564									
5.3 GHz		802.11ac VHT80	5	1 Tx	Rear	58	5290			9.5	9.5	0.114									
					Front	58	5290			9.5	9.5	0.459				0.211	0.058	0.211	0.058		
					Edge 2	58	5290			9.5	9.5	0.121									
					Edge 3	58	5290			9.5	9.5	0.101									
					Edge 4	58	5290			9.5	9.5	0.022									
5.2 GHz		802.11ac VHT80	5	2 Tx	Rear	42	5210	14.0	14.0	9.0	9.0	0.429	0.277	0.087	0.277	0.087	0.041	0.014	0.041	0.014	
					Front	42	5210	14.0	14.0	9.0	9.0	0.552	0.305	0.109	0.305	0.109	0.156	0.043	0.156	0.043	
					Edge 1	42	5210	14.0	14.0	9.0	9.0	0.276									
					Edge 2	42	5210	14.0	14.0	9.0	9.0	0.229									
					Edge 3	42	5210	14.0	14.0	9.0	9.0	0.081									
					Edge 4	42	5210	14.0	14.0	9.0	9.0	0.420									

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Cell Off

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots	
								UAT 2		LAT 3			UAT 2				LAT 3					
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled			
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g		
5.2 GHz	Head	802.11ac VHT80	0	1 Tx	Left Touch	42	5210	15.0	14.9			1.110	0.707	0.239	0.723	0.245						
					Left Tilt	42	5210	15.0	14.9			1.270	0.848	0.249	0.868	0.255						
					Right Touch	42	5210	15.0	14.9			1.880	1.050	0.347	1.074	0.355						
					Right Tilt	42	5210	15.0	14.9			1.880	1.020	0.306	1.044	0.313						
5.3 GHz		802.11a	0	1 Tx	Left Touch	56	5280			21.0	19.8	0.300										
					Left Tilt	56	5280			21.0	19.8	0.111										
					Right Touch	56	5280			21.0	19.8	0.329					0.203	0.075	0.268	0.099		
					Right Tilt	56	5280			21.0	19.8	0.109										
5.2 GHz		802.11n HT40	0	2 Tx	Left Touch	46	5230	15.0	14.9	19.5	19.5	1.030	0.695	0.226	0.711	0.231						
					Left Tilt	46	5230	15.0	14.9	19.5	19.5	1.130	0.707	0.227	0.723	0.232						
					Right Touch	38	5190	15.0	14.9	15.0	15.0	1.720	0.833	0.277	0.852	0.283	0.089	0.089	0.036	0.089		
						46	5230	15.0	14.9	19.5	19.5	1.900	0.925	0.296	0.947	0.303	0.315	0.315	0.112	0.315		
					Right Tilt	38	5190	15.0	14.9	15.0	15.0	2.490	1.170	0.340	1.197	0.348	-	-	-	-	-	39
						46	5230	15.0	14.9	19.5	19.5	2.370	1.120	0.321	1.146	0.328	-	-	-	-	-	
5.2 GHz	Body-worn & Hotspot	802.11n HT40	5	1 Tx	Rear	38	5190	16.5	16.5			0.720	0.347	0.106	0.347	0.106						
						46	5230	18.3	18.3			1.900	0.871	0.238	0.871	0.238						
					Front	38	5190	16.5	16.5			0.865	0.437	0.149	0.437	0.149						
						46	5230	18.3	18.3			1.960	0.998	0.356	0.998	0.356						
					Edge 1	46	5230	18.3	18.3			0.888	0.456	0.164	0.456	0.164						
					Edge 2	46	5230	18.3	18.3			0.254										
					Edge 4	38	5190	16.5	16.5			0.733	0.373	0.128	0.373	0.128						
						46	5230	18.3	18.3			1.710	0.878	0.304	0.878	0.304						
		5.3 GHz	802.11n HT40	5	1 Tx	Rear	54	5270			16.3	16.2	0.548					0.248	0.069	0.254	0.071	
							54	5270			16.3	16.2	2.290					1.090	0.279	1.115	0.285	40
Front						62	5310			15.5	15.5	1.720					0.831	0.227	0.831	0.227		
						54	5270			16.3	16.2	0.309										
Edge 2						54	5270			16.3	16.2	0.245										
Edge 4						54	5270			16.3	16.2	0.012										
5.2 GHz		802.11n HT40	5	2 Tx	Rear	38	5190	15.0	14.8	15.0	15.0	0.544	0.333	0.105	0.349	0.110	0.155	0.047	0.155	0.047		
						46	5230	18.3	18.3	15.8	15.8	1.400	0.803	0.252	0.803	0.252	0.194	0.063	0.194	0.063		
					Front	38	5190	15.0	14.8	15.0	15.0	2.370	0.437	0.151	0.458	0.158	1.070	0.286	1.070	0.286		
						46	5230	18.3	18.3	15.8	15.8	2.410	0.836	0.296	0.836	0.296	1.090	0.298	1.090	0.298		
					Edge 1	46	5230	18.3	18.3	15.8	15.8	0.631										
					Edge 2	46	5230	18.3	18.3	15.8	15.8	0.428										
					Edge 3	46	5230	18.3	18.3	15.8	15.8	0.538										
					Edge 4	46	5230	18.3	18.3	15.8	15.8	1.440	0.744	0.262	0.744	0.262	-	-	-	-		

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

10.25. Wi-Fi (U-NII-2C Band)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed for each power configuration for Wi-Fi: Cell On and Cell Off and for each Antenna – UAT 2 and LAT 3 –using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Cell On

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
								UAT 2		LAT 3			UAT 2				LAT 3				
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	
5.5 GHz	Head	802.11ac VHT80	0	1 Tx	Left Touch	122	5610	4.5	4.5			0.353									
					Left Tilt	122	5610	4.5	4.5			0.369									
					Right Touch	122	5610	4.5	4.5			0.491	0.188	0.048	0.188	0.048					
					Right Tilt	122	5610	4.5	4.5			0.347									
		802.11a	0	1 Tx	Left Touch	124	5620			19.8	19.8	0.335									
					Left Tilt	124	5620			19.8	19.8	0.128									
					Right Touch	124	5620			19.8	19.8	0.343				0.235	0.093	0.235	0.093		
					Right Tilt	124	5620			19.8	19.8	0.149									
		802.11n HT40	0	2 Tx	Left Touch	126	5630	4.5	4.5	19.5	19.5	0.192									
					Left Tilt	126	5630	4.5	4.5	19.5	19.5	0.302									
					Right Touch	126	5630	4.5	4.5	19.5	19.5	0.407	0.184	0.050	0.184	0.050	0.247	0.099	0.247	0.099	
					Right Tilt	126	5630	4.5	4.5	19.5	19.5	0.254									
5.5 GHz	Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Rear	122	5610	11.5	11.4			0.610	0.256	0.073	0.262	0.075					
					Front	122	5610	11.5	11.4			0.739	0.404	0.121	0.413	0.124					
					Edge 1	122	5610	11.5	11.4			0.056									
					Edge 2	122	5610	11.5	11.4			0.010									
					Edge 4	122	5610	11.5	11.4			0.194									
		802.11ac VHT80	5	1 Tx	Rear	122	5610			10.0	10.0	0.086									
					Front	122	5610			10.0	10.0	0.472				0.231	0.066	0.231	0.066		
					Edge 2	122	5610			10.0	10.0	0.021									
					Edge 3	122	5610			10.0	10.0	0.033									
		802.11ac VHT80	5	2 Tx	Edge 4	122	5610			10.0	10.0	0.006									
					Rear	122	5610	11.5	11.5	10.0	10.0	0.574	0.250	0.071	0.250	0.071	0.080	0.022	0.080	0.022	
					Front	122	5610	11.5	11.5	10.0	10.0	0.744	0.397	0.120	0.397	0.120	0.154	0.045	0.154	0.045	
					Edge 1	122	5610	11.5	11.5	10.0	10.0	0.192									
					Edge 2	122	5610	11.5	11.5	10.0	10.0	0.034									
					Edge 3	122	5610	11.5	11.5	10.0	10.0	0.031									
					Edge 4	122	5610	11.5	11.5	10.0	10.0	0.146									

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Cell Off

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
								UAT 2		LAT 3			UAT 2				LAT 3				
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	
5.5 GHz	Head	802.11ac VHT80	0	1 Tx	Left Touch	122	5610	12.3	12.3			1.250	0.841	0.263	0.841	0.263					
						138	5690	12.3	12.3			1.280	0.799	0.253	0.799	0.253					
					Left Tilt	122	5610	12.3	12.3			1.650	0.871	0.269	0.871	0.269					
						138	5690	12.3	12.3			1.550	0.810	0.249	0.810	0.249					
					Right Touch	122	5610	12.3	12.3			1.680	1.120	0.305	1.120	0.305					
						138	5690	12.3	12.3			2.420	1.100	0.288	1.100	0.288					
					Right Tilt	122	5610	12.3	12.3			1.640	1.140	0.308	1.140	0.308					
						138	5690	12.3	12.3			2.140	1.180	0.306	1.180	0.306					41
		802.11a	0	1 Tx	Left Touch	124	5620			21.0	19.8	0.335									
					Left Tilt	124	5620			21.0	19.8	0.128									
					Right Touch	124	5620			21.0	19.8	0.343					0.235	0.093	0.310	0.123	
					Right Tilt	124	5620			21.0	19.8	0.149									
		802.11n HT40	0	2 Tx	Left Touch	126	5630	12.3	12.3	19.5	19.5	1.350	0.737	0.227	0.737	0.227	-	-	-	-	
					Left Tilt	126	5630	12.3	12.3	19.5	19.5	1.390	0.839	0.255	0.839	0.255	0.074	0.029	0.074	0.029	
						142	5710	12.3	12.3	19.5	19.5	1.080	0.629	0.193	0.629	0.193	0.037	0.015	0.037	0.015	
					Right Touch	126	5630	12.3	12.3	19.5	19.5	1.510	0.926	0.252	0.926	0.252	0.151	0.060	0.151	0.060	
142	5710					12.3	12.3	19.5	19.5	1.600	0.894	0.236	0.894	0.236	0.155	0.062	0.155	0.062			
Right Tilt	126				5630	12.3	12.3	19.5	19.5	1.890	0.892	0.240	0.892	0.240	0.088	0.035	0.088	0.035			
	142				5710	12.3	12.3	19.5	19.5	1.880	0.838	0.244	0.838	0.244	0.075	0.030	0.075	0.030			
5.5 GHz	Body-worn & Hotspot				802.11ac VHT80	5	1 Tx	Rear	122	5610	15.8	15.6			1.010	0.466	0.136	0.488	0.142		
		Front	122	5610				15.8	15.6			1.320	0.759	0.237	0.795	0.248					
			138	5690				15.8	15.8			1.320	0.726	0.220	0.726	0.220					
		Edge 1	122	5610				15.8	15.6			0.682									
		Edge 2	122	5610				15.8	15.6			0.037									
		Edge 4	122	5610				15.8	15.6			0.351									
		802.11ac VHT80	5	1 Tx	Rear	138	5690			16.8	16.8	0.755					0.405	0.113	0.405	0.113	
					Front	122	5610			16.8	16.8	1.850					1.130	0.369	1.130	0.369	42
						138	5690			16.8	16.8	1.670					0.955	0.318	0.955	0.318	
					Edge 2	138	5690			16.8	16.8	0.204									
					Edge 3	138	5690			16.8	16.8	0.325									
					Edge 4	138	5690			16.8	16.8	0.024									
		802.11ac VHT80	5	2 Tx	Rear	122	5610	15.8	15.7	16.8	16.8	1.010	0.322	0.099	0.330	0.101	0.417	0.115	0.417	0.115	
					Front	122	5610	15.8	15.7	16.8	16.8	1.720	0.451	0.142	0.462	0.145	0.976	0.311	0.976	0.311	
						138	5690	15.8	15.7	16.8	16.8	1.530	0.795	0.265	0.814	0.271	0.291	0.089	0.291	0.089	
					Edge 1	122	5610	15.8	15.7	16.8	16.8	0.370									
Edge 2	122				5610	15.8	15.7	16.8	16.8	0.233											
Edge 3	122				5610	15.8	15.7	16.8	16.8	0.310											
Edge 4	122	5610	15.8	15.7	16.8	16.8	0.217														

Notes:

For SAR results with “-“, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

10.26. Wi-Fi (U-NII-3 Band)

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed for each power configuration for Wi-Fi: Cell On and Cell Off and for each Antenna – UAT 2 and LAT 3 –using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Cell On

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
								UAT 2		LAT 3			UAT 2				LAT 3				
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	
5.8 GHz	Head	802.11ac VHT80	0	1 Tx	Left Touch	155	5775	5.3	5.3			0.326									
					Left Tilt	155	5775	5.3	5.3			0.317									
					Right Touch	155	5775	5.3	5.3			0.468	0.199	0.049	0.199	0.049					
					Right Tilt	155	5775	5.3	5.3			0.313									
		802.11a	0	1 Tx	Left Touch	157	5785			19.8	19.8	0.195									
					Left Tilt	157	5785			19.8	19.8	0.100									
					Right Touch	157	5785			19.8	19.8	0.466					0.229	0.090	0.229	0.090	
					Right Tilt	157	5785			19.8	19.8	0.112									
		802.11a	0	2 Tx	Left Touch	157	5785	5.3	5.3	19.8	19.8	0.336									
					Left Tilt	157	5785	5.3	5.3	19.8	19.8	0.329									
					Right Touch	157	5785	5.3	5.3	19.8	19.8	0.369	0.190	0.047	0.190	0.047	0.205	0.085	0.205	0.085	
					Right Tilt	157	5785	5.3	5.3	19.8	19.8	0.218									
5.8 GHz	Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Rear	155	5775	11.5	11.5			0.300									
					Front	155	5775	11.5	11.5			0.623	0.390	0.107	0.390	0.107					
					Edge 1	155	5775	11.5	11.5			0.217									
					Edge 2	155	5775	11.5	11.5			0.029									
					Edge 4	155	5775	11.5	11.5			0.148									
		802.11ac VHT80	5	1 Tx	Rear	155	5775			10.3	10.3	0.406									
					Front	155	5775			10.3	10.3	0.420					0.235	0.075	0.235	0.075	
					Edge 2	155	5775			10.3	10.3	0.062									
					Edge 3	155	5775			10.3	10.3	0.136									
					Edge 4	155	5775			10.3	10.3	0.016									
		802.11ac VHT80	5	2 Tx	Rear	155	5775	11.5	11.5	10.3	10.3	0.452									
					Front	155	5775	11.5	11.5	10.3	10.3	0.590	0.393	0.111	0.393	0.111	0.198	0.057	0.198	0.057	
					Edge 1	155	5775	11.5	11.5	10.3	10.3	0.250									
					Edge 2	155	5775	11.5	11.5	10.3	10.3	0.052									
					Edge 3	155	5775	11.5	11.5	10.3	10.3	0.132									
					Edge 4	155	5775	11.5	11.5	10.3	10.3	0.162									

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Cell Off

Band	RF Exposure Condition	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots		
								UAT 2		LAT 3			UAT 2				LAT 3						
								Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled				
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g			
5.8 GHz	Head	802.11ac VHT80	0	1 Tx	Left Touch	155	5775	13.0	13.0			1.480	0.883	0.281	0.883	0.281					43		
					Left Tilt	155	5775	13.0	13.0			1.360	0.873	0.283	0.873	0.283							
					Right Touch	155	5775	13.0	13.0			2.270	1.140	0.281	1.140	0.281							
					Right Tilt	155	5775	13.0	13.0			1.550	0.962	0.247	0.962	0.247							
		802.11a	0	1 Tx	Left Touch	157	5785			21.0	19.8	0.195											
					Left Tilt	157	5785			21.0	19.8	0.100											
					Right Touch	157	5785			21.0	19.8	0.466					0.229	0.090	0.302	0.119			
					Right Tilt	157	5785			21.0	19.8	0.112											
		802.11a	0	2 Tx	Left Touch	157	5785	13.0	13.0	21.0	21.0	1.420	0.907	0.276	0.907	0.276	-	-	-	-			
						161	5805	13.0	13.0	21.0	21.0	1.540	0.922	0.284	0.922	0.284	-	-	-	-			
					Left Tilt	157	5785	13.0	13.0	21.0	21.0	1.210	0.743	0.230	0.743	0.230	-	-	-	-			
					Right Touch	157	5785	13.0	13.0	21.0	21.0	2.830	1.140	0.277	1.140	0.277	0.410	0.157	0.410	0.157			
						161	5805	13.0	13.0	21.0	21.0	1.550	0.954	0.248	0.954	0.248	0.458	0.179	0.458	0.179			
						157	5785	13.0	13.0	21.0	21.0	1.200	0.831	0.204	0.831	0.204	-	-	-	-			
						161	5805	13.0	13.0	21.0	21.0	1.640	0.801	0.215	0.801	0.215	-	-	-	-			
5.8 GHz	Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Rear	155	5775	15.8	15.8			1.290	0.619	0.166	0.619	0.166					44		
					Front	155	5775	15.8	15.8			1.020	1.020	0.296	1.020	0.296							
					Edge 1	155	5775	15.8	15.8			0.628											
					Edge 2	155	5775	15.8	15.8			0.100											
							Edge 4	155	5775	15.8	15.8			0.449									
							Rear	155	5775			17.0	16.8	0.907					0.666	0.185	0.697	0.194	
							Front	155	5775			17.0	16.8	1.370					0.779	0.253	0.816	0.265	
							Edge 2	155	5775			17.0	16.8	0.264									
							Edge 3	155	5775			17.0	16.8	0.367									
							Edge 4	155	5775			17.0	16.8	0.040									
							Rear	155	5775	15.8	15.0	17.0	16.2	1.070	0.445	0.123	0.535	0.148	0.727	0.208	0.874	0.250	
							Front	155	5775	15.8	15.0	17.0	16.2	1.460	0.819	0.224	0.985	0.269	0.437	0.100	0.525	0.120	
		802.11ac VHT80	5	2 Tx	Edge 1	155	5775	15.8	15.0	17.0	16.2	0.371											
					Edge 2	155	5775	15.8	15.0	17.0	16.2	0.130											
					Edge 3	155	5775	15.8	15.0	17.0	16.2	0.264											
					Edge 4	155	5775	15.8	15.0	17.0	16.2	0.236											

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

10.27. Wi-Fi Variant 2 Spot Check

SAR Testing (Spot Check) was performed based on the worst case SAR result from Sec. 10.23 – Sec. 10.26. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn & Hotspot exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

Wi-Fi (DTS Band)

Vendor	Band	RF Exposure Conditions	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)							
									UAT 1		LAT 3		UAT 1				LAT 3			
									Tune-up Limit	Measured	Tune-up Limit	Measured	Measured		Scaled		Measured		Scaled	
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g
Variant 1 Highest Report SAR	2.4 GHz	Head	802.11b	0	1 Tx	Left Tilt	6	2437	14.8	14.8			1.170	0.413	1.170	0.413				
		Body-worn & Hotspot	802.11b	5	1 Tx	Front	6	2437	18.3	18.3			1.070	0.409	1.070	0.409				
Variant 2 Spot Check	2.4 GHz	Head	802.11b	0	1 Tx	Left Tilt	6	2437	14.8	14.8			1.020	0.383	1.020	0.383				
		Body-worn & Hotspot	802.11b	5	1 Tx	Front	6	2437	18.8	18.7			0.966	0.372	0.989	0.381				

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Wi-Fi (U-NII-1 and U-NII-2A Band)

Vendor	Band	RF Exposure Conditions	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)							
									UAT 2		LAT 3		UAT 2				LAT 3			
									Tune-up Limit	Measured	Tune-up Limit	Measured	Measured		Scaled		Measured		Scaled	
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g
Variant 1 Highest Report SAR	5.2 & 5.3 GHz	Head	802.11ac VHT80	0	2 Tx	Right Tilt	38	5190	15.0	14.9	15.0	15.0	1.170	0.340	1.197	0.348	-	-	-	-
		Body-worn & Hotspot	802.11n HT40	5	1 Tx	Front	54	5270			16.3	16.2					1.090	0.279	1.115	0.285
Variant 2 Spot Check	5.2 & 5.3 GHz	Head	802.11ac VHT80	0	2 Tx	Right Tilt	38	5190	15.0	14.9	15.0	15.0	1.085	0.332	1.110	0.340	-	-	-	-
		Body-worn & Hotspot	802.11n HT40	5	1 Tx	Front	54	5270			16.3	16.2					0.969	0.254	0.992	0.260

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Wi-Fi (U-NII-2C Band)

Vendor	Band	RF Exposure Conditions	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)							
									UAT 2		LAT 3		UAT 2				LAT 3			
									Tune-up Limit	Measured	Tune-up Limit	Measured	Measured		Scaled		Measured		Scaled	
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g
Variant 1 Highest Report SAR	5.5 GHz	Head	802.11ac VHT80	0	1 Tx	Right Tilt	138	5690	12.3	12.3			1.180	0.306	1.180	0.306				
		Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Front	122	5610			16.8	16.8					1.130	0.369	1.130	0.369
Variant 2 Spot Check	5.5 GHz	Head	802.11ac VHT80	0	1 Tx	Right Tilt	138	5690	12.3	12.3			1.010	0.275	1.010	0.275				
		Body-worn & Hotspot	802.11ac VHT80	5	1 Tx	Front	122	5610			16.8	16.8					1.010	0.311	1.010	0.311

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

Wi-Fi (U-NII-3 Band)

Vendor	Band	RF Exposure Conditions	Mode	Dist. (mm)	No. of Transmitters	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)							
									UAT 2		LAT 3		UAT 2				LAT 3			
									Tune-up Limit	Measured	Tune-up Limit	Measured	Measured		Scaled		Measured		Scaled	
													1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g
Variant 1 Highest Report SAR	5.8 GHz	Head	802.11ac VHT80	0	1 Tx	Right Touch	155	5775	13.0	13.0			1.140	0.281	1.140	0.281				
		Body-worn & Hotspot	802.11n HT 40	5	2 Tx	Front	155	5775	15.8	15.8			1.020	0.296	1.020	0.296				
Variant 2 Spot Check	5.8 GHz	Head	802.11ac VHT80	0	1 Tx	Right Touch	155	5775	13.0	13.0			1.130	0.280	1.130	0.280				
		Body-worn & Hotspot	802.11n HT 40	5	2 Tx	Front	155	5775	15.8	15.8			1.020	0.295	1.020	0.295				

Notes:

For SAR results with “-”, there is no additional zoom scans due to secondary peak not being within 2dB of maximum peak.

10.28. Bluetooth

SAR Testing was performed based on the power measurement results from Sec. 9. Testing was performed for each power configuration for Bluetooth: P_{low} , P_{High} , $P_{\text{standalone}}$ and for each Antenna – UAT 1 and LAT 3 – separately using the corresponding power modes: Mode A and Mode B. Mode A power was used when the DUT was tested on Head exposure condition. Mode B power was used when the DUT was tested on Body-worn exposure condition. Mode C power configuration is not used for distances less than 20cm from the body and therefore not applicable for SAR testing.

UAT 1

P_{low}

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	10.0	10.0	0.122	0.122	0.046	0.046	
				Left Tilt	39	2441.0	10.0	10.0	0.144	0.144	0.050	0.050	
				Right Touch	39	2441.0	10.0	10.0	0.099	0.099	0.037	0.037	
				Right Tilt	39	2441.0	10.0	10.0	0.121	0.121	0.048	0.048	
	Body-worn	GFSK	5	Rear	39	2441.0	10.0	10.0	0.094	0.094	0.036	0.036	
				Front	39	2441.0	10.0	10.0	0.099	0.099	0.039	0.039	

P_{High}

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	12.0	12.0	0.209	0.209	0.077	0.077	
				Left Tilt	39	2441.0	12.0	12.0	0.241	0.241	0.083	0.083	
				Right Touch	39	2441.0	12.0	12.0	0.199	0.199	0.082	0.082	
				Right Tilt	39	2441.0	12.0	12.0	0.198	0.198	0.079	0.079	
	Body-worn	GFSK	5	Rear	39	2441.0	13.5	13.0	0.172	0.193	0.067	0.075	
				Front	39	2441.0	13.5	13.0	0.179	0.201	0.071	0.080	

$P_{\text{standalone}}$

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	14.5	14.5	0.324	0.324	0.123	0.123	
				Left Tilt	39	2441.0	14.5	14.5	0.372	0.372	0.130	0.130	45
				Right Touch	39	2441.0	14.5	14.5	0.261	0.261	0.109	0.109	
				Right Tilt	39	2441.0	14.5	14.5	0.298	0.298	0.116	0.116	
	Body-worn	GFSK	5	Rear	39	2441.0	16.5	16.0	0.364	0.408	0.138	0.155	
				Front	39	2441.0	16.5	16.0	0.383	0.430	0.145	0.163	

LAT 3

 P_{low}

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	10.0	10.0	0.011	0.011	0.007	0.007	
				Left Tilt	39	2441.0	10.0	10.0	0.008	0.008	0.003	0.003	
				Right Touch	39	2441.0	10.0	10.0	0.034	0.034	0.018	0.018	
				Right Tilt	39	2441.0	10.0	10.0	0.007	0.007	0.005	0.005	
	Body-worn	GFSK	5	Rear	39	2441.0	10.0	10.0	0.044	0.044	0.020	0.020	
				Front	39	2441.0	10.0	10.0	0.072	0.072	0.032	0.032	

 P_{high}

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	16.5	16.5	0.028	0.028	0.015	0.015	
				Left Tilt	39	2441.0	16.5	16.5	0.014	0.014	0.007	0.007	
				Right Touch	39	2441.0	16.5	16.5	0.099	0.099	0.052	0.052	
				Right Tilt	39	2441.0	16.5	16.5	0.019	0.019	0.010	0.010	
	Body-worn	GFSK	5	Rear	39	2441.0	13.5	13.5	0.063	0.063	0.033	0.033	
				Front	39	2441.0	13.5	13.5	0.120	0.120	0.056	0.056	

 $P_{standalone}$

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441.0	19.5	19.5	0.107	0.107	0.057	0.057	
				Left Tilt	39	2441.0	19.5	19.5	0.066	0.066	0.033	0.033	
				Right Touch	39	2441.0	19.5	19.5	0.299	0.299	0.160	0.160	
				Right Tilt	39	2441.0	19.5	19.5	0.082	0.082	0.043	0.043	
	Body-worn	GFSK	5	Rear	39	2441.0	16.5	16.0	0.136	0.153	0.064	0.072	
				Front	39	2441.0	16.5	16.0	0.441	0.495	0.195	0.219	46

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated		Second Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Body & Hotspot	Rear	No	0.786	N/A	N/A	N/A	N/A
	LTE Band 13	Body & Hotspot	Rear	Yes	0.883	0.836	1.06	N/A	N/A
850	GSM 850	Body & Hotspot	Rear	No	1.030	N/A	N/A	N/A	N/A
	CDMA BC0	Head	Left Touch	No	0.958	N/A	N/A	N/A	N/A
	CDMA BC10	Head	Left Touch	No	0.887	N/A	N/A	N/A	N/A
	WCDMA Band V	Head	Right Touch	Yes	1.070	1.020	1.05	N/A	N/A
	LTE Band 26	Head	Right Touch	No	0.939	N/A	N/A	N/A	N/A
1700	WCDMA Band IV	Head	Right Touch	Yes	0.961	0.879	1.09	N/A	N/A
	LTE Band 66	Hotspot	Edge 3	No	0.883	N/A	N/A	N/A	N/A
1900	GSM 1900	Body & Hotspot	Rear	Yes	1.070	1.040	1.03	N/A	N/A
	CDMA BC1	Head	Right Touch	No	1.040	N/A	N/A	N/A	N/A
	WCDMA Band II	Head	Right Touch	No	0.991	N/A	N/A	N/A	N/A
	LTE Band 2	Head	Right Touch	No	1.030	N/A	N/A	N/A	N/A
	LTE Band 25	Body & Hotspot	Rear	No	1.050	N/A	N/A	N/A	N/A
2300	LTE Band 30	Body & Hotspot	Rear	Yes	1.080	1.040	1.04	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Head	Left Tilt	Yes	1.170	1.050	1.11	N/A	N/A
	BT	Body	Front	No	0.411	N/A	N/A	N/A	N/A
2500	LTE Band 7	Head	Left Touch	Yes	1.140	1.070	1.07	N/A	N/A
2600	LTE Band 41	Body & Hotspot	Rear	Yes	0.962	0.922	1.04	N/A	N/A
5200 / 5300	Wi-Fi 802.11a/n/ac	Head	Right Tilt	Yes	1.170	1.150	1.02	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Head	Right Tilt	Yes	1.18	1.06	1.11	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Head	Right Touch	Yes	1.14	1.11	1.03	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is < 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri \leq 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations			
Head Body Worn Accessory Hotspots	1	WWAN OFF (CELLULAR ANTENNAS OFF)	+ (UAT 2) Wi-Fi 5 GHz SISO	+	(UAT 1) Bluetooth (P _{High})
	2		+ (LAT 3) Wi-Fi 5 GHz SISO	+	(UAT 1) Bluetooth (P _{High})
	3		+ Wi-Fi 5 GHz MIMO	+	(UAT 1) Bluetooth (P _{High})
	4		+ (UAT 2) Wi-Fi 5 GHz SISO	+	(LAT 3) Bluetooth (P _{High})
	5		+ (LAT 3) Wi-Fi 5 GHz SISO	+	(LAT 3) Bluetooth (P _{High})
	6		+ Wi-Fi 5 GHz MIMO	+	(LAT 3) Bluetooth (P _{High})
	7	WWAN ON (CELLULAR ANTENNAS ON)	+ (UAT 1) Wi-Fi 2.4 GHz SISO		
	8		+ (LAT 3) Wi-Fi 2.4 GHz SISO		
	9		+ Wi-Fi 2.4 GHz MIMO		
	10			+	(UAT 1) Bluetooth (P _{High})
	11			+	(LAT 3) Bluetooth (P _{High})
	12		+ (UAT 2) Wi-Fi 5 GHz SISO		
	13		+ (LAT 3) Wi-Fi 5 GHz SISO		
	14		+ Wi-Fi 5 GHz MIMO		
	15		+ (UAT 2) Wi-Fi 5 GHz SISO	+	(UAT 1) Bluetooth (P _{Low})
	16		+ (LAT 3) Wi-Fi 5 GHz SISO	+	(UAT 1) Bluetooth (P _{Low})
	17		+ Wi-Fi 5 GHz MIMO	+	(UAT 1) Bluetooth (P _{Low})
	18		+ (UAT 2) Wi-Fi 5 GHz SISO	+	(LAT 3) Bluetooth (P _{Low})
	19		+ (LAT 3) Wi-Fi 5 GHz SISO	+	(LAT 3) Bluetooth (P _{Low})
	20		+ Wi-Fi 5 GHz MIMO	+	(LAT 3) Bluetooth (P _{Low})

Notes:

1. Wi-Fi 2.4GHz & Bluetooth cannot transmit simultaneously.
2. Conditions 12, 13, and 14 are covered by conditions 15, 16, and 17, respectively.

12.1. Sum of the SAR for Worst Case Cell-Off (UNII & BT only)

RF Exposure Condition	Test Position	Standalone SAR (W/kg)					Σ 1g SAR (W/g)					
		(E)	(F)	(G)	(H)	(J)	(E) + (H)	(F) + (H)	(G) + (H)	(E) + (J)	(F) + (J)	(G) + (J)
		U-NII UAT2	U-NII LAT3	U-NII MIMO	BT UAT1P-high	BT LAT3 P-high	U-NII+BT UAT2+UAT1P-high	U-NII+BT LAT3+UAT1P-high	U-NII+BT MIMO+UAT1P-high	U-NII+BT UAT2+LAT3 P-high	U-NII+BT LAT3+LAT3 P-high	U-NII+BT MIMO+LAT3 P-high
Head	Left Touch	0.883	0.310	0.922	0.209	0.028	1.092	0.519	1.131	0.911	0.338	0.950
	Left Tilt	0.873	0.310	0.839	0.241	0.014	1.114	0.551	1.080	0.887	0.324	0.853
	Right Touch	1.140	0.310	1.140	0.199	0.099	1.339	0.509	1.339	1.239	0.409	1.239
	Right Tilt	1.180	0.310	1.197	0.198	0.019	1.378	0.508	1.395	1.199	0.329	1.216
Body-worn Accessory & Hotspot	Rear	0.871	0.697	0.803	0.193	0.063	1.064	0.890	0.996	0.934	0.760	0.866
	Front	1.020	1.130	1.090	0.201	0.120	1.221	1.331	1.291	1.140	1.250	1.210
Hotspot	Edge 1	0.456	1.130	1.090			0.456	1.130	1.090	0.456	1.130	1.090
	Edge 2	1.020	1.130	1.090			1.020	1.130	1.090	1.020	1.130	1.090
	Edge 3	1.020	1.130	1.090			1.020	1.130	1.090	1.020	1.130	1.090
	Edge 4	0.878	1.130	0.744			0.878	1.130	0.744	0.878	1.130	0.744

12.2. Sum of the SAR for Worst Case Cell-On (Cellular UAT 1), DTS and BT

RF Exposure Condition	Test Position	Standalone SAR (W/kg)						Σ 1g SAR (W/g)				
		(A)	(B)	(C)	(D)	(H)	(J)	(A) + (B)	(A) + (C)	(A) + (D)	(A) + (H)	(A) + (J)
		WWAN UAT1	DTS UAT1	DTS LAT3	DTS MIMO	BT UAT1P-high	BT LAT3 P-high	WWAN+DTS UAT1+UAT1	WWAN+DTS UAT1+LAT3	WWAN+DTS UAT1+MIMO	WWAN+BT UAT1+UAT1P-high	WWAN+BT UAT1+LAT3 P-high
Head	Left Touch	1.040	0.346	0.232	0.316	0.209	0.028	1.386	1.272	1.356	1.249	1.068
	Left Tilt	1.085	0.346	0.232	0.316	0.241	0.014	1.431	1.317	1.401	1.326	1.099
	Right Touch	1.078	0.346	0.232	0.316	0.199	0.099	1.424	1.310	1.394	1.277	1.177
	Right Tilt	1.050	0.346	0.232	0.316	0.198	0.019	1.396	1.282	1.366	1.248	1.069
Body-worn Accessory & Hotspot	Rear	0.886	0.380	0.290	0.417	0.193	0.063	1.266	1.176	1.303	1.079	0.949
	Front	0.862	0.533	0.290	0.459	0.201	0.120	1.395	1.152	1.321	1.063	0.982
Hotspot	Edge 1	0.890	0.533	0.000	0.459			1.423	0.890	1.349	0.890	0.890
	Edge 2	0.725	0.533	0.290	0.459			1.258	1.015	1.184	0.725	0.725
	Edge 4	0.719	0.533	0.290	0.459			1.252	1.009	1.178	0.719	0.719

12.3. Sum of the SAR for Worst Case Cell-On (Cellular UAT 1), UNII and BT

RF Exposure Condition	Test Position	Standalone SAR (W/kg)						Σ 1-g SAR (W/g)					
		(A)	(E)	(F)	(G)	(I)	(K)	(A) + (E) + (I)	(A) + (F) + (I)	(A) + (G) + (I)	(A) + (E) + (K)	(A) + (F) + (K)	(A) + (G) + (K)
		WWAN UAT1	U-NII UAT2	U-NII LAT3	U-NII MIMO	BT UAT1P-low	BT LAT3 P-low	WWAN + U-NII + BT UAT1 + UAT2 + UAT1 P-low	WWAN + U-NII + BT UAT1 + LAT3 + UAT1 P-low	WWAN + U-NII + BT UAT1 + MIMO + UAT1P-low	WWAN + U-NII + BT UAT1 + UAT2 + LAT3 P-low	WWAN + U-NII + BT UAT1 + LAT3 + LAT3 P-low	WWAN + U-NII + BT UAT1 + MIMO + LAT3 P-low
Head	Left Touch	1040	0.199	0.235	0.247	0.122	0.011	1361	1397	1409	1250	1286	1298
	Left Tilt	1085	0.199	0.235	0.247	0.144	0.008	1428	1464	1476	1292	1328	1340
	Right Touch	1078	0.199	0.235	0.247	0.099	0.034	1376	1412	1424	1311	1347	1359
	Right Tilt	1050	0.199	0.235	0.247	0.121	0.007	1370	1406	1418	1256	1292	1304
Body-worn Accessory & Hotspot	Rear	0.886	0.262	0.235	0.280	0.094	0.044	1242	1215	1260	1192	1165	1210
	Front	0.862	0.413	0.235	0.397	0.099	0.072	1374	1196	1358	1347	1169	1331
Hotspot	Edge 1	0.890	0.413	0.000	0.397			1303	0.890	1287	1303	0.890	1287
	Edge 2	0.725	0.413	0.235	0.397			1138	0.960	1122	1138	0.960	1122
	Edge 4	0.719	0.413	0.235	0.397			1132	0.954	1116	1132	0.954	1116

12.4. Sum of the SAR for Worst Case Cell-On (LAT 1), DTS and BT

RF Exposure Condition	Test Position	Standalone SAR (W/kg)						Σ 1-g SAR (W/g)				
		(A)	(B)	(C)	(D)	(H)	(J)	(A) + (B)	(A) + (C)	(A) + (D)	(A) + (H)	(A) + (J)
		WWAN LAT1	DTS UAT1	DTS LAT3	DTS MIMO	BT UAT1P-high	BT LAT3 P-high	WWAN + DTS LAT1 + UAT1	WWAN + DTS LAT1 + LAT3	WWAN + DTS LAT1 + MIMO	WWAN + BT LAT1 + UAT1P-high	WWAN + BT LAT1 + LAT3 P-high
Head	Left Touch	1140	0.346	0.232	0.316	0.209	0.028	1486	1372	1456	1349	1168
	Left Tilt	0.332	0.346	0.232	0.316	0.241	0.014	0.678	0.564	0.648	0.573	0.346
	Right Touch	1068	0.346	0.232	0.316	0.199	0.099	1414	1300	1384	1267	1167
	Right Tilt	0.338	0.346	0.232	0.316	0.198	0.019	0.684	0.570	0.654	0.536	0.357
Body-worn Accessory & Hotspot	Rear	1080	0.380	0.290	0.417	0.193	0.063	1460	1370	1497	1273	1143
	Front	1030	0.533	0.290	0.459	0.201	0.120	1563	1320	1489	1231	1150
Hotspot	Edge 2	0.560	0.533	0.290	0.459			1093	0.850	1019	0.560	0.560
	Edge 3	1017	0.000	0.290	0.459			1017	1307	1476	1017	1017
	Edge 4	0.882	0.533	0.290	0.459			1415	1172	1341	0.882	0.882

12.5. Sum of the SAR for Worst Case Cell-On (LAT 1), UNII and BT

RF Exposure Condition	Test Position	Standalone SAR (W/kg)						Σ 1-g SAR (W/g)					
		(A)	(E)	(F)	(G)	(I)	(K)	(A) + (E) + (I)	(A) + (F) + (I)	(A) + (G) + (I)	(A) + (E) + (K)	(A) + (F) + (K)	(A) + (G) + (K)
		WWAN LAT1	U-NII UAT2	U-NII LAT3	U-NII MIMO	BT UAT1P-low	BT LAT3 P-low	WWAN + U-NII + BT LAT1 + UAT2 + UAT1 P-low	WWAN + U-NII + BT LAT1 + LAT3 + UAT1 P-low	WWAN + U-NII + BT LAT1 + MIMO + UAT1 P-low	WWAN + U-NII + BT LAT1 + UAT2 + LAT3 P-low	WWAN + U-NII + BT LAT1 + LAT3 + LAT3 P-low	WWAN + U-NII + BT LAT1 + MIMO + LAT3 P-low
Head	Left Touch	1140	0.199	0.235	0.247	0.122	0.011	1461	1497	1509	1350	1386	1398
	Left Tilt	0.332	0.199	0.235	0.247	0.144	0.008	0.675	0.711	0.723	0.539	0.575	0.587
	Right Touch	1068	0.199	0.235	0.247	0.099	0.034	1366	1402	1414	1301	1337	1349
	Right Tilt	0.338	0.199	0.235	0.247	0.121	0.007	0.658	0.694	0.706	0.544	0.580	0.592
Body-worn Accessory & Hotspot	Rear	1080	0.262	0.235	0.280	0.094	0.044	1436	1409	1454	1386	1359	1404
	Front	1030	0.413	0.235	0.397	0.099	0.072	1542	1364	1526	1515	1337	1499
Hotspot	Edge 2	0.560	0.413	0.235	0.397			0.973	0.795	0.957	0.973	0.795	0.957
	Edge 3	1017	0.000	0.235	0.397			1017	1252	1414	1017	1252	1414
	Edge 4	0.882	0.413	0.235	0.397			1295	1117	1279	1295	1117	1279

Appendixes

Refer to separated files for the following appendixes.

11708541-S1V1 SAR_App A Setup Photos

11708541-S1V1 SAR_App B System Check Plots

11708541-S1V1 SAR_App C Highest Test Plots

11708541-S1V1 SAR_App D Tissue Ingredients

11708541-S1V1 SAR_App E Probe Cal. Certificates

11708541-S1V1 SAR_App F Dipole Cal. Certificates

END OF REPORT