


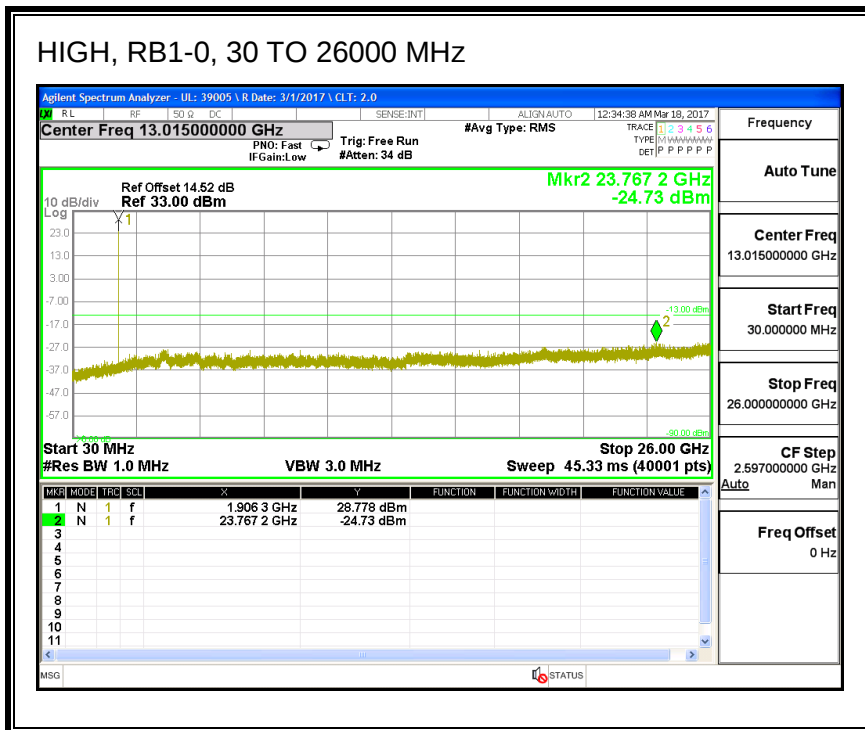


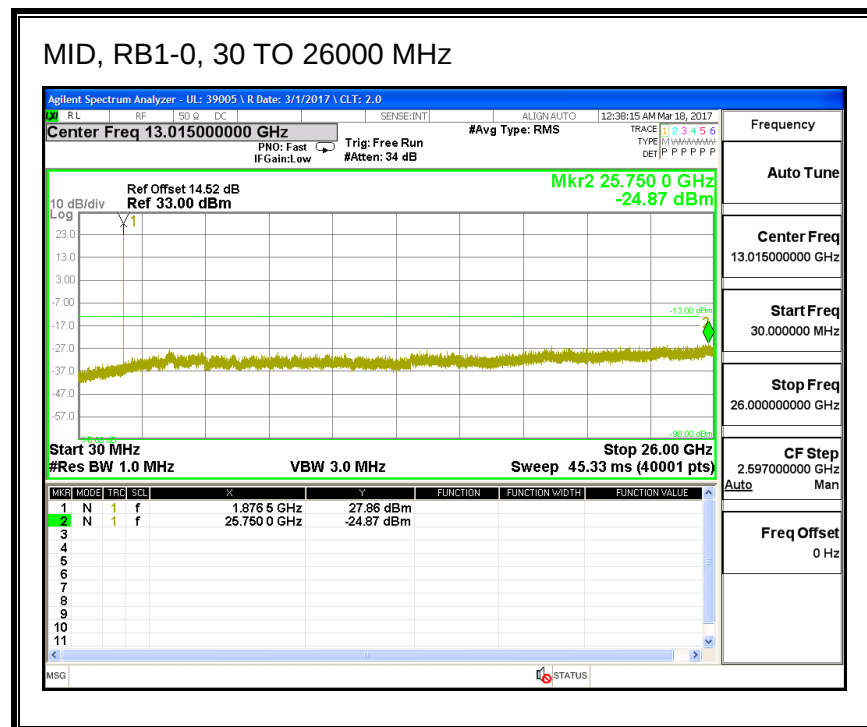




QPSK, (15.0 MHz BAND WIDTH)

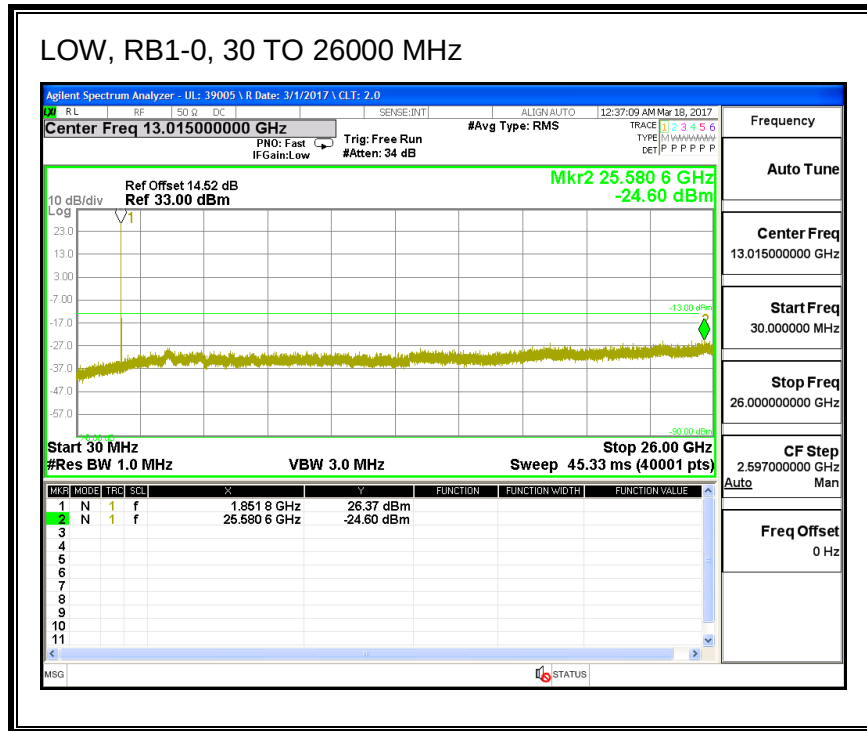


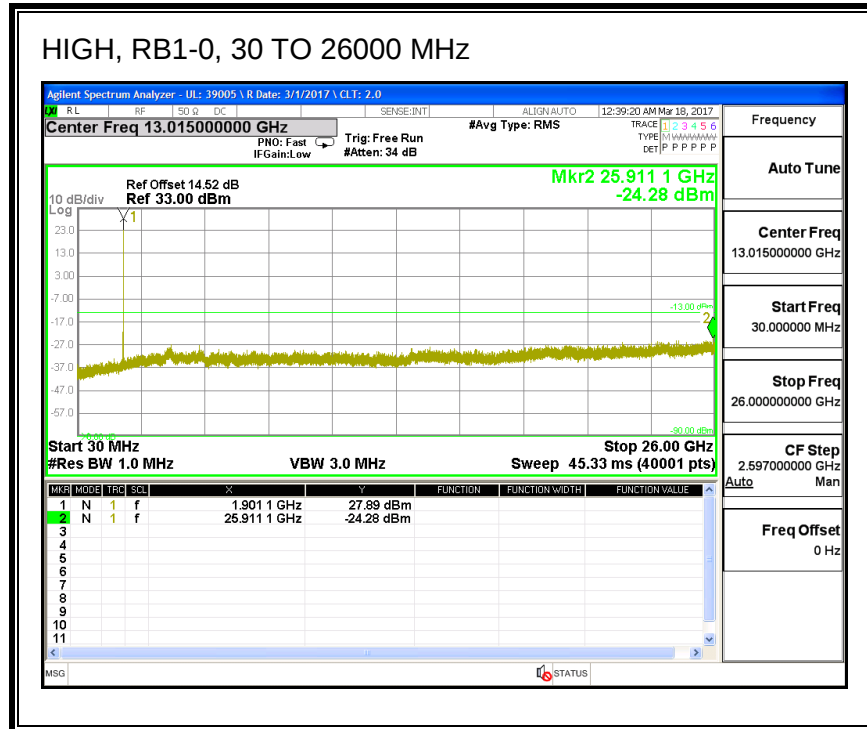



16QAM, (15.0 MHz BAND WIDTH)

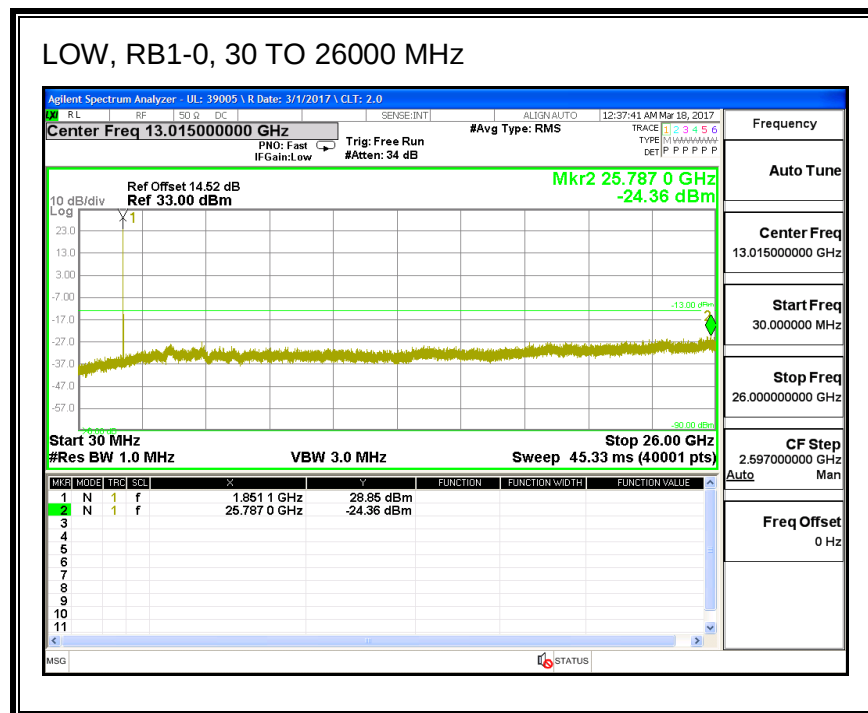

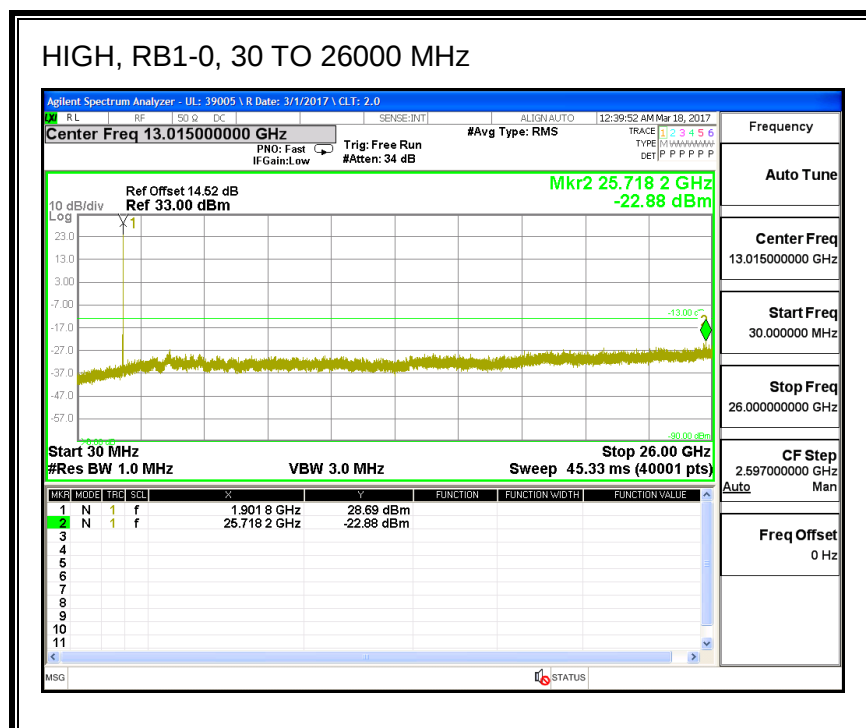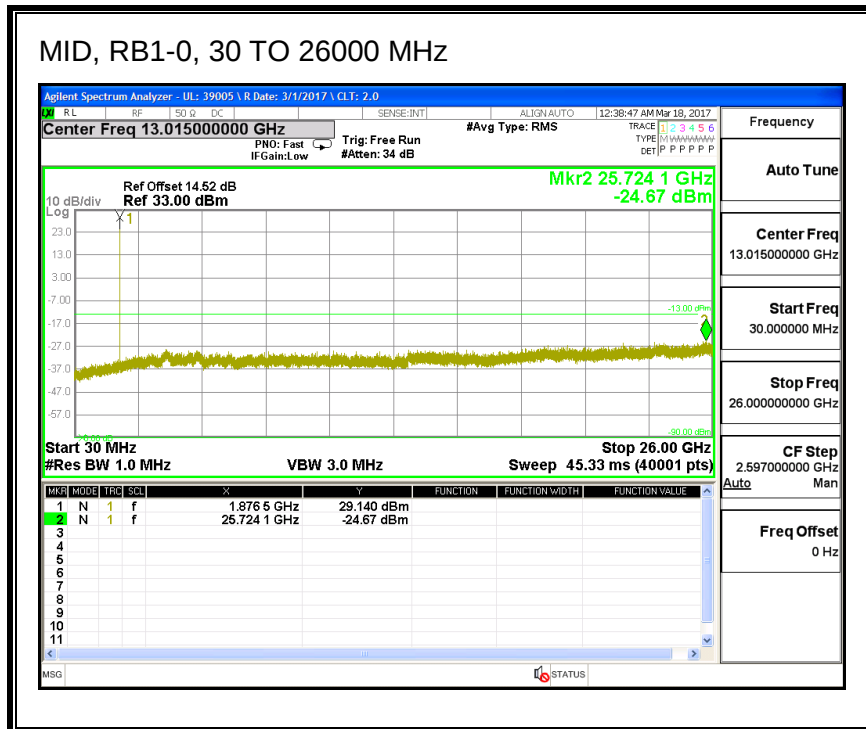




QPSK, (20.0 MHz BAND WIDTH)

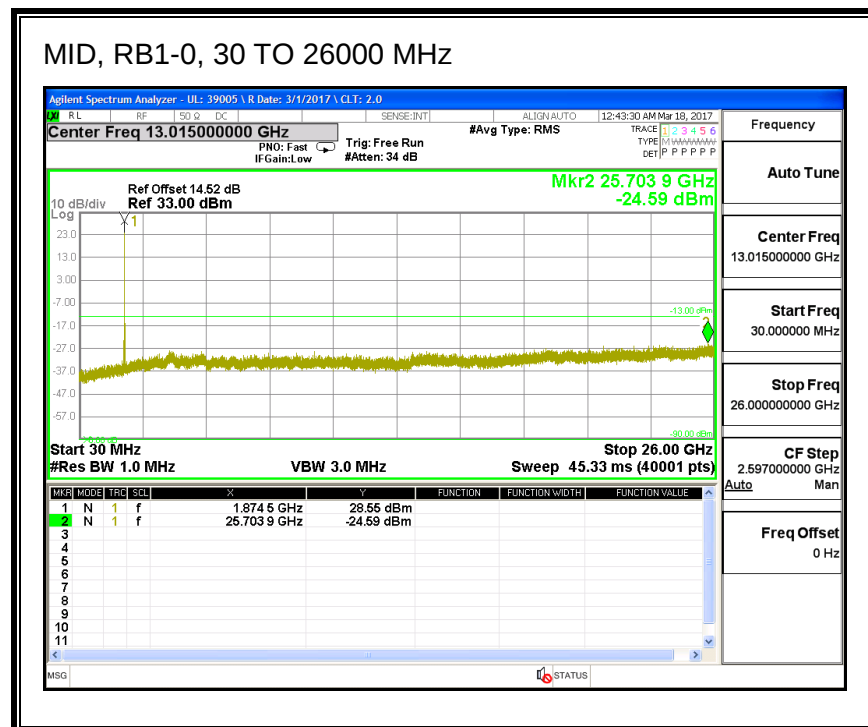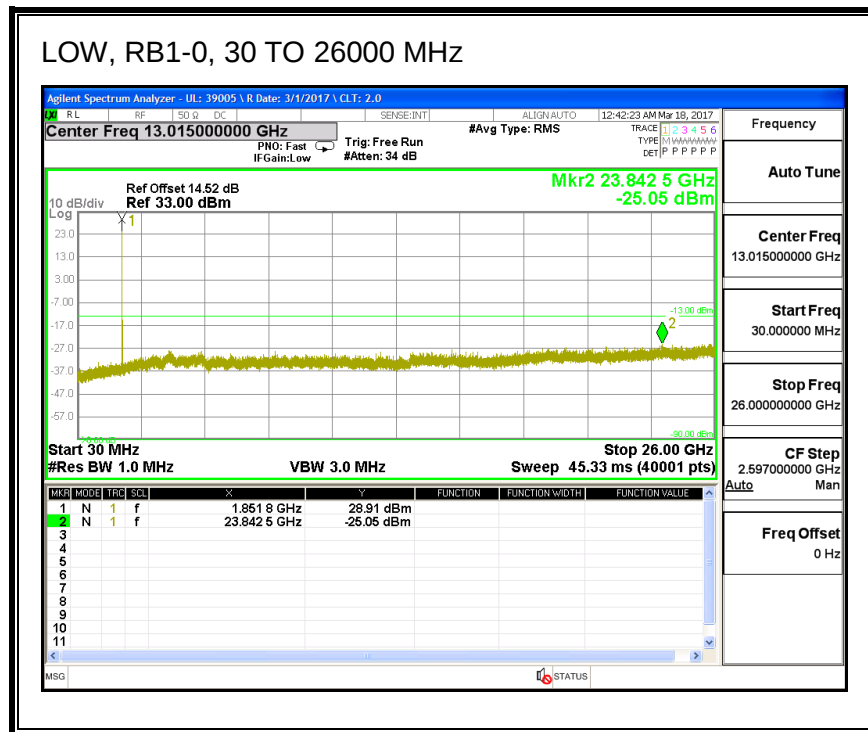

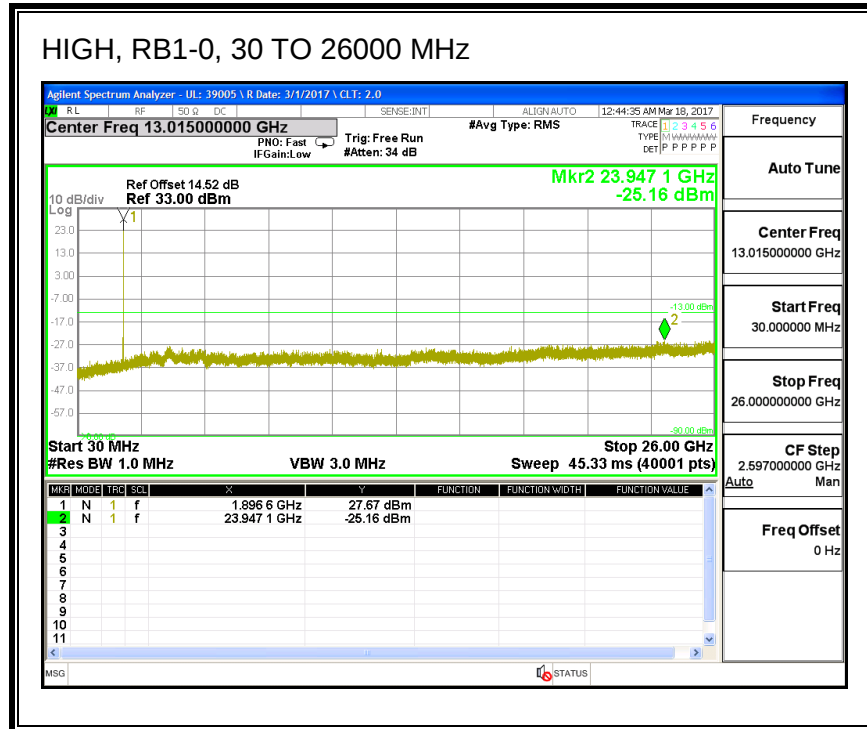



16QAM, (20.0 MHz BAND WIDTH)

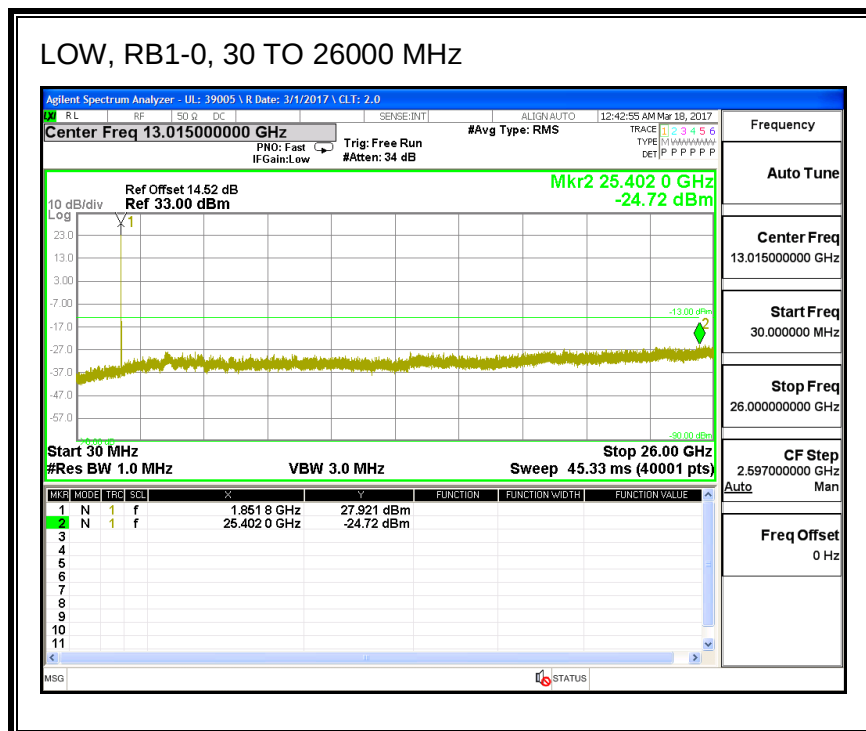


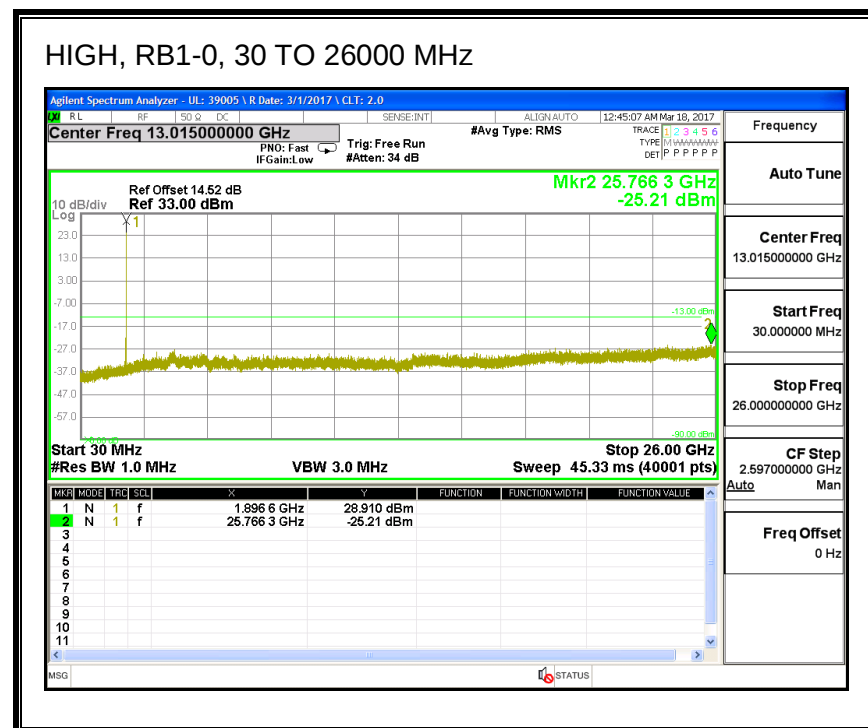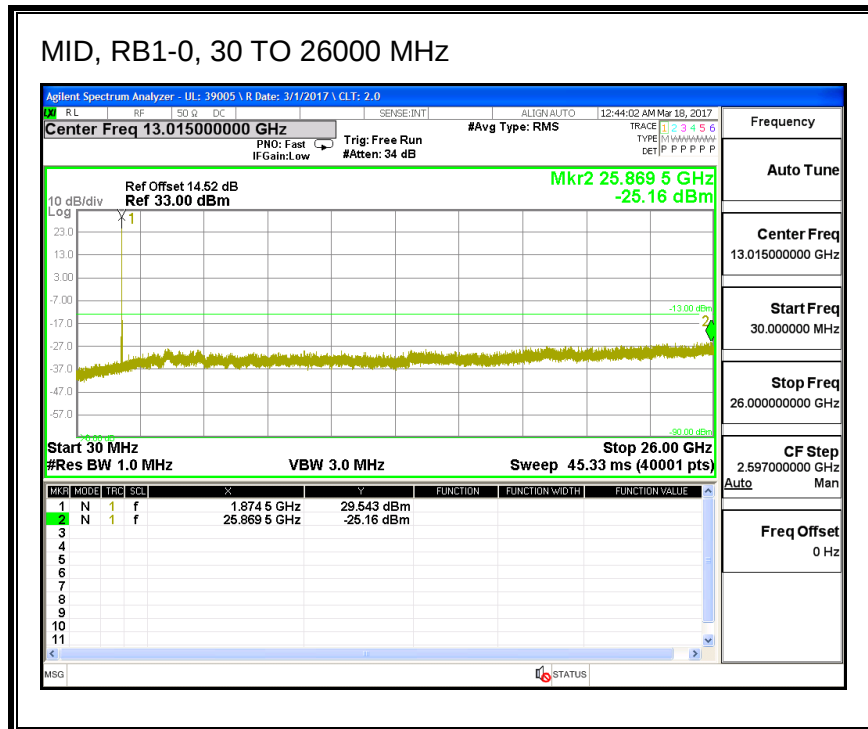


8.2.9. LTE BAND 26



QPSK, (1.4 MHz BAND WIDTH)

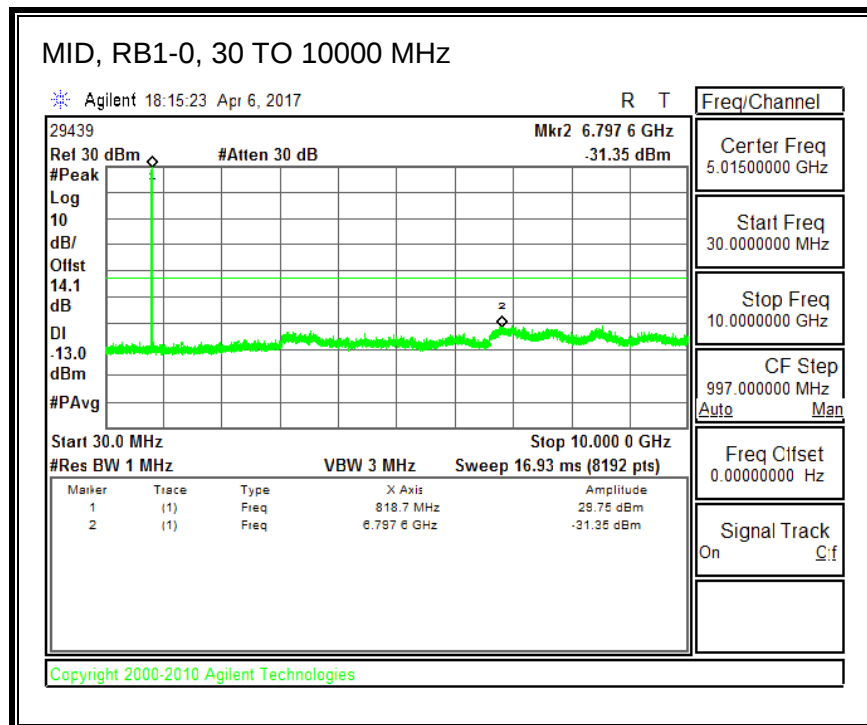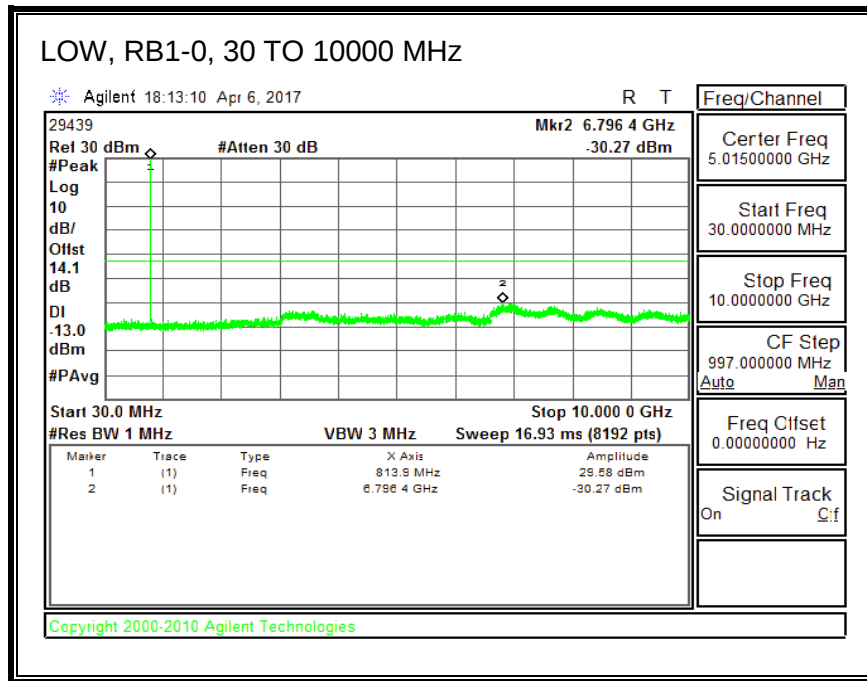


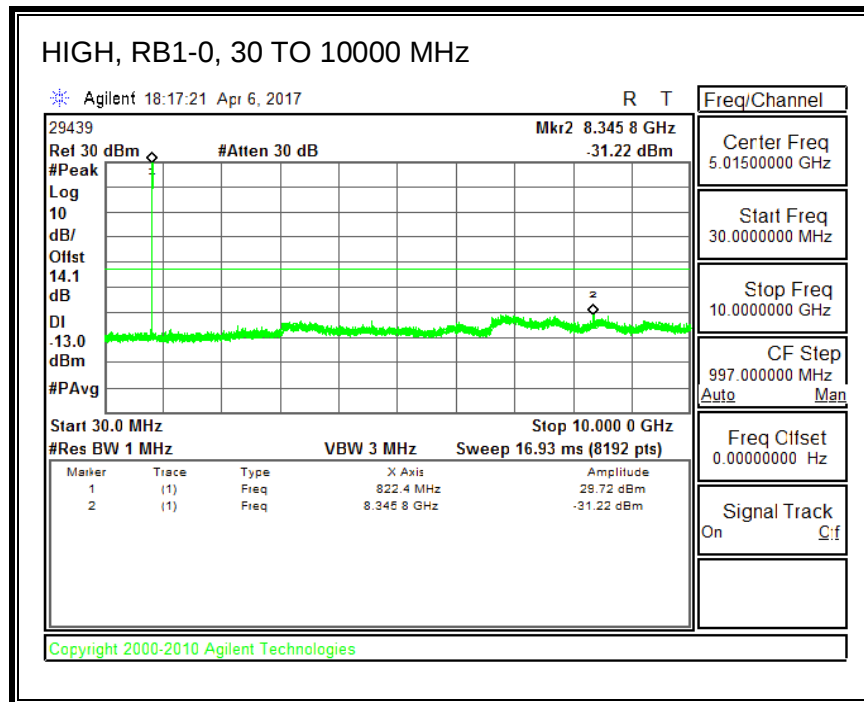



16QAM, (1.4 MHz BAND WIDTH)

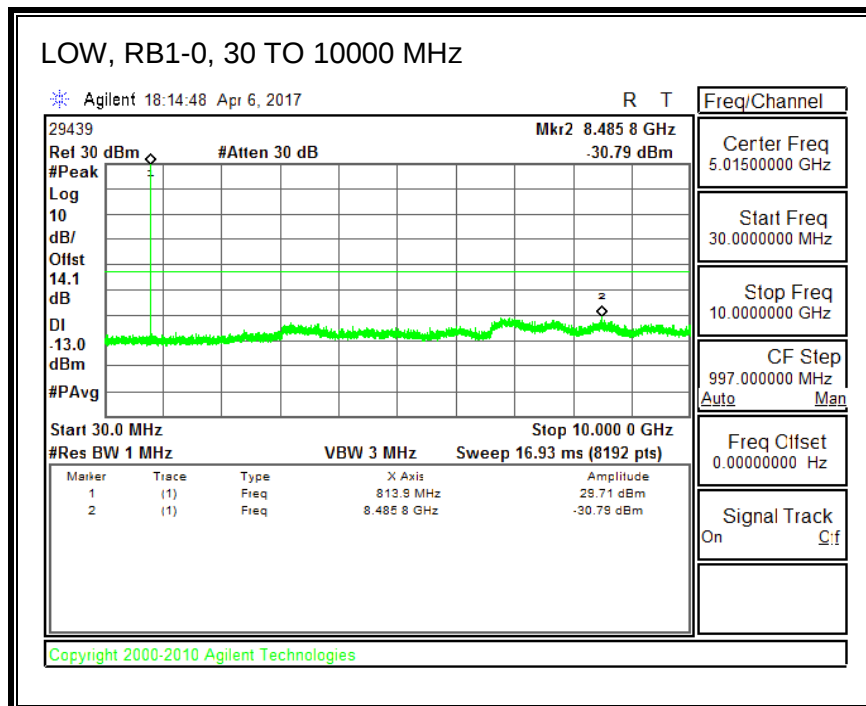

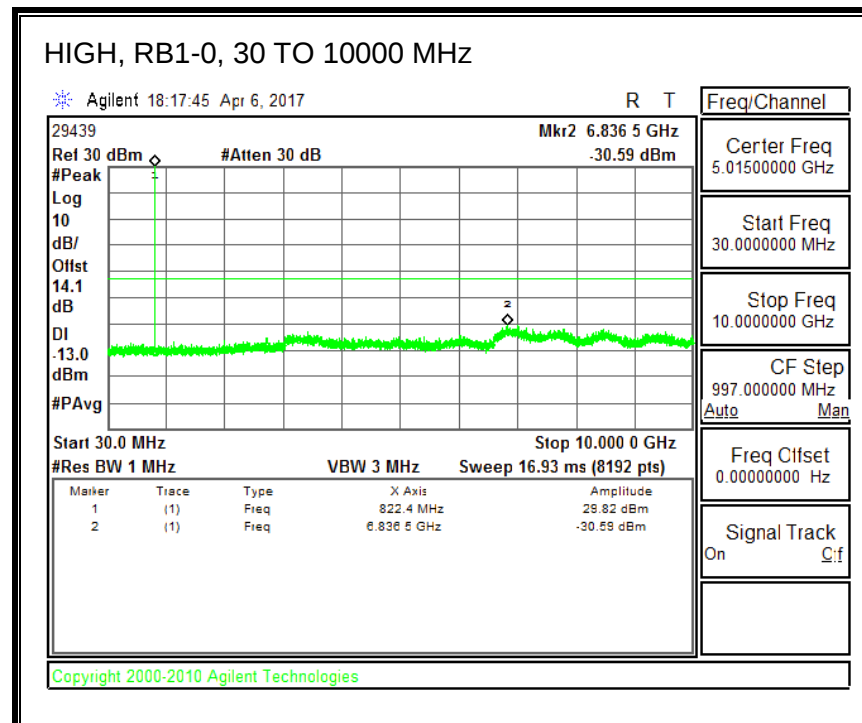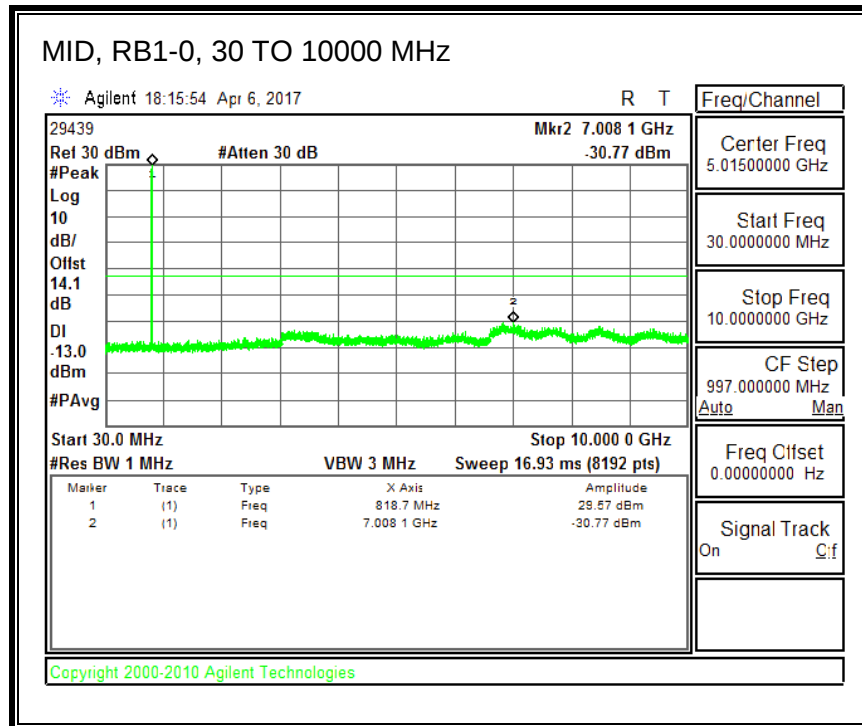




QPSK, (3.0 MHz BAND WIDTH)

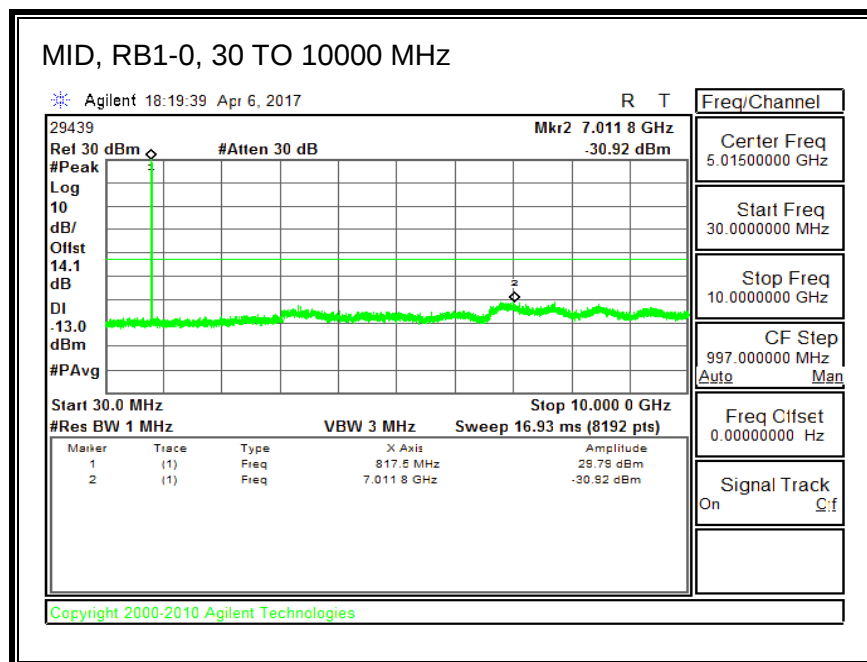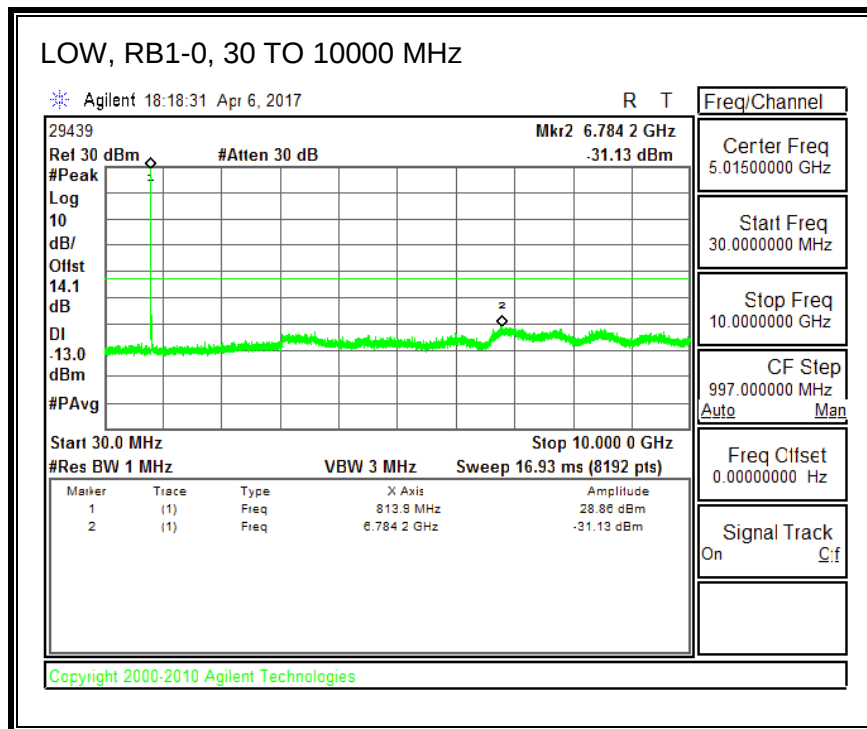


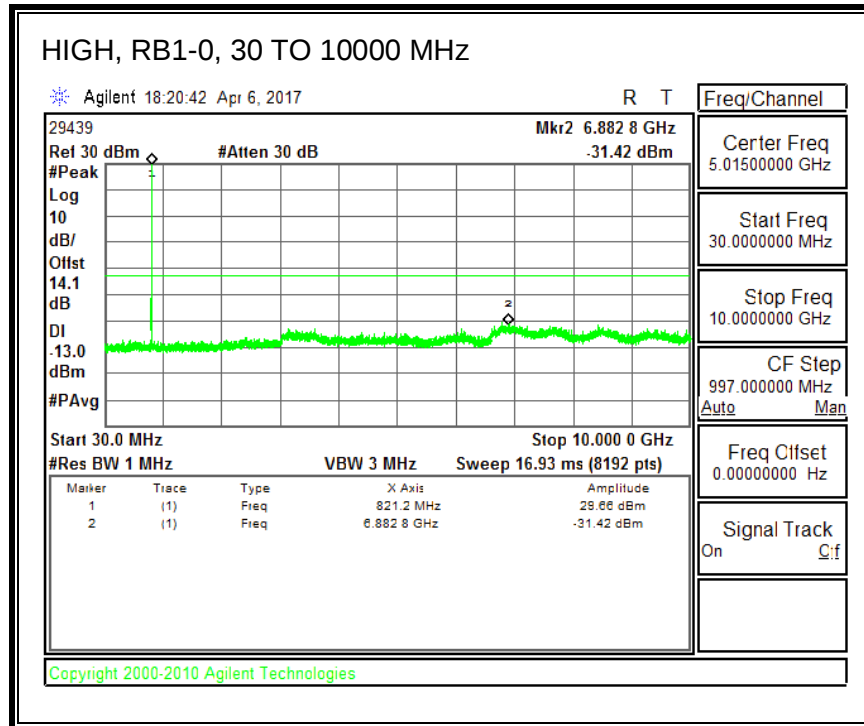



16QAM, (3.0 MHz BAND WIDTH)

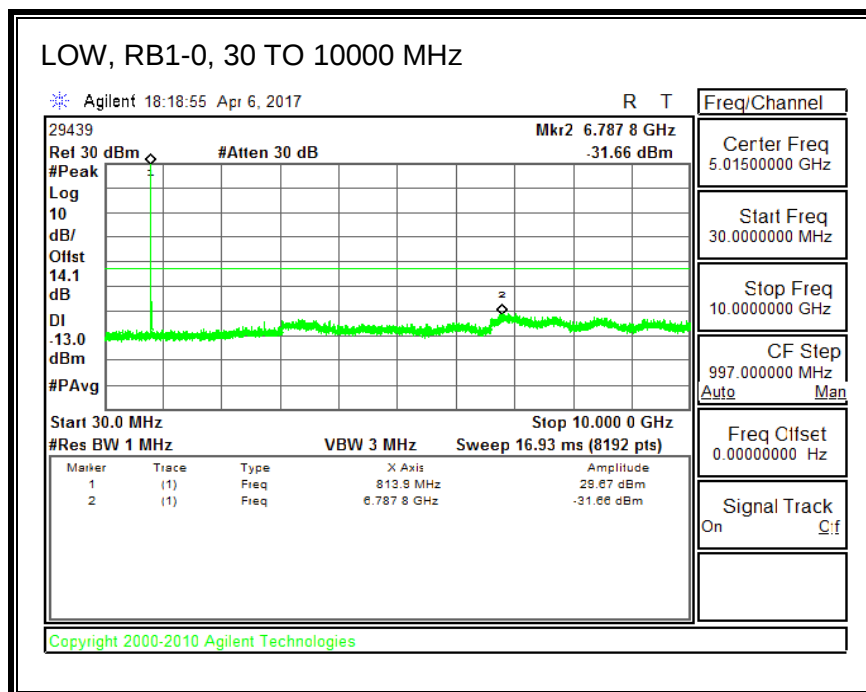

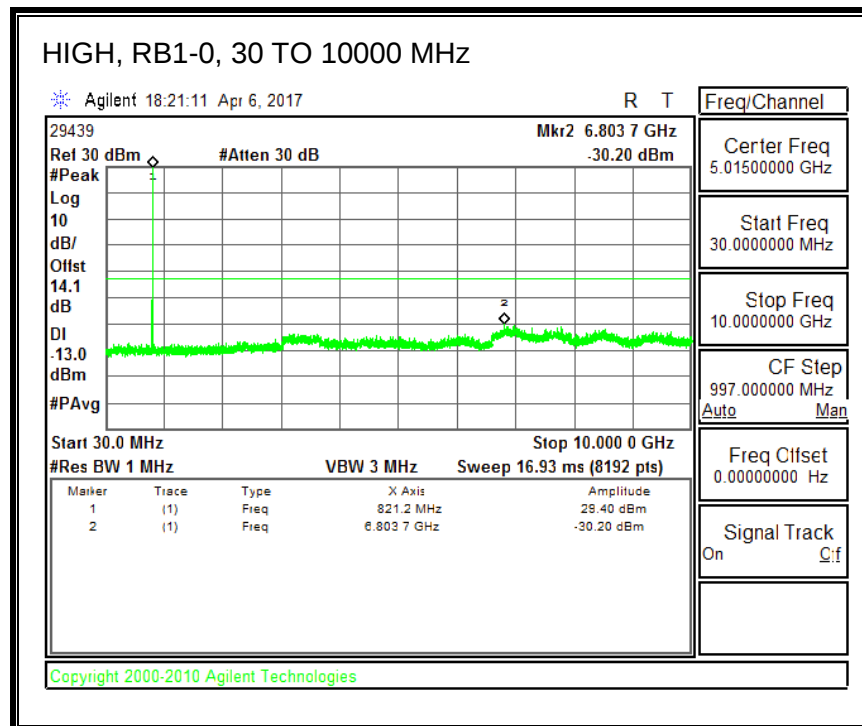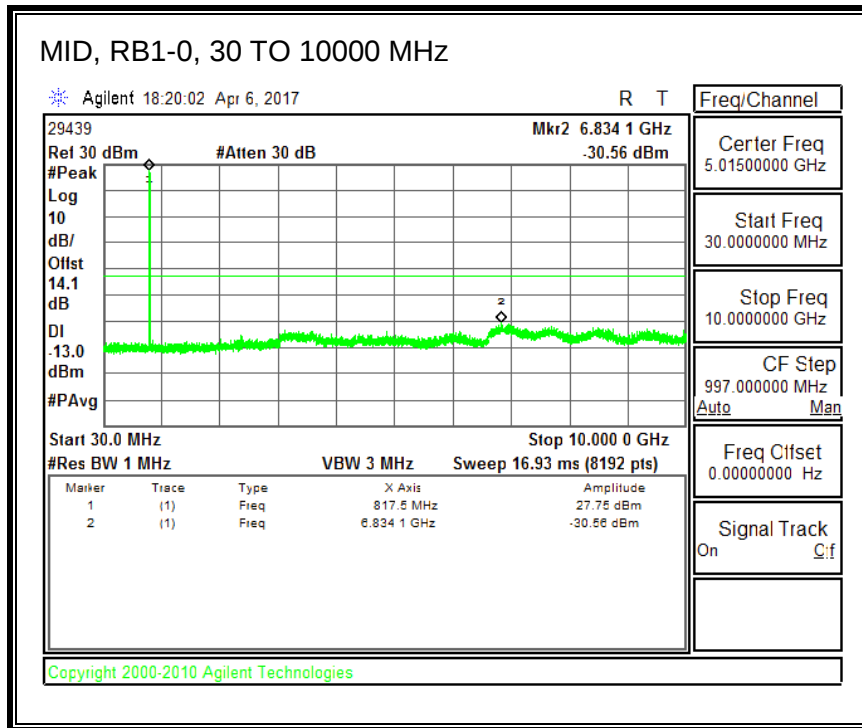




QPSK, (5.0 MHz BAND WIDTH)

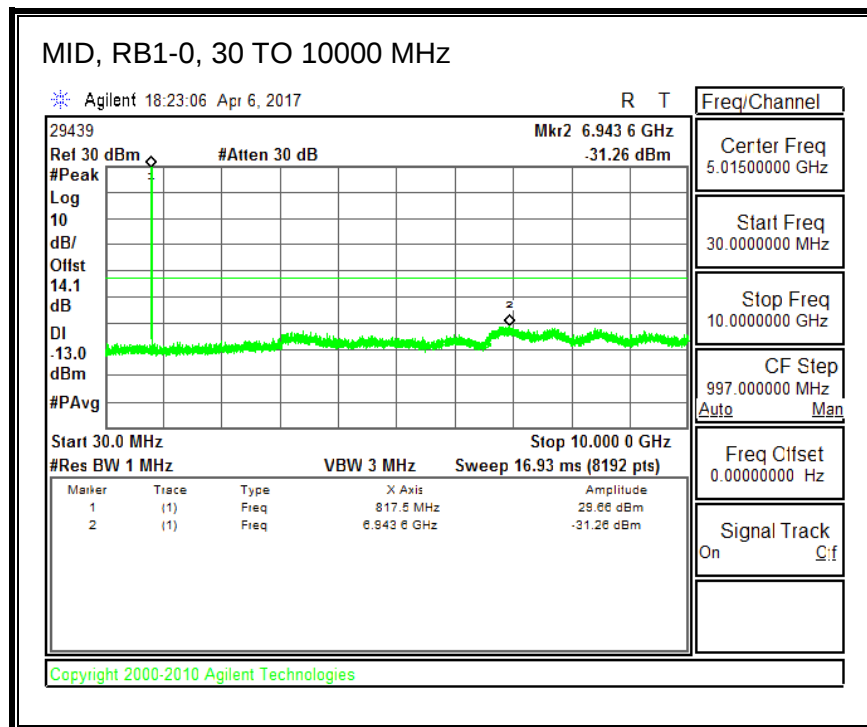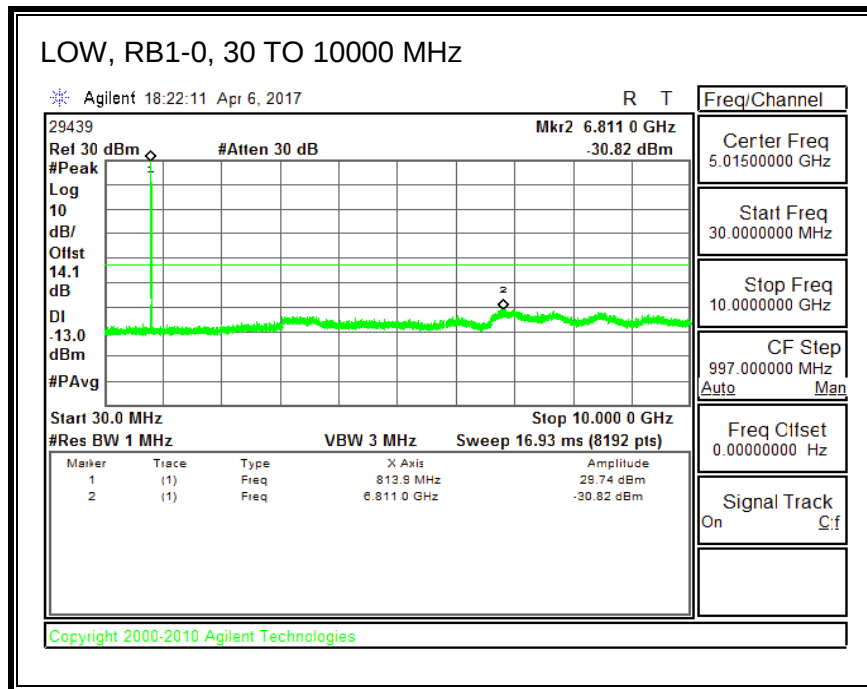

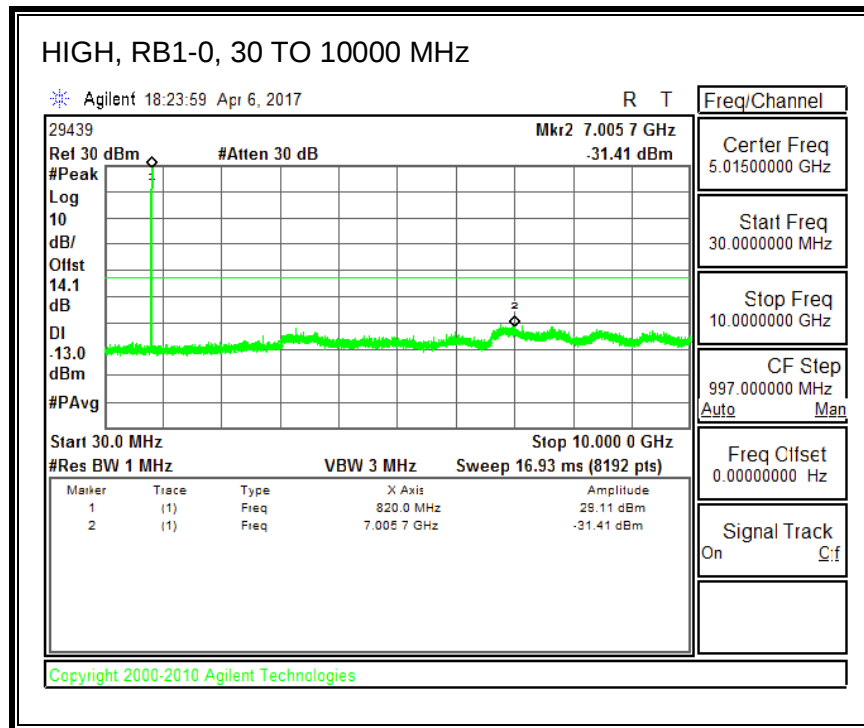


16QAM, (5.0 MHz BAND WIDTH)

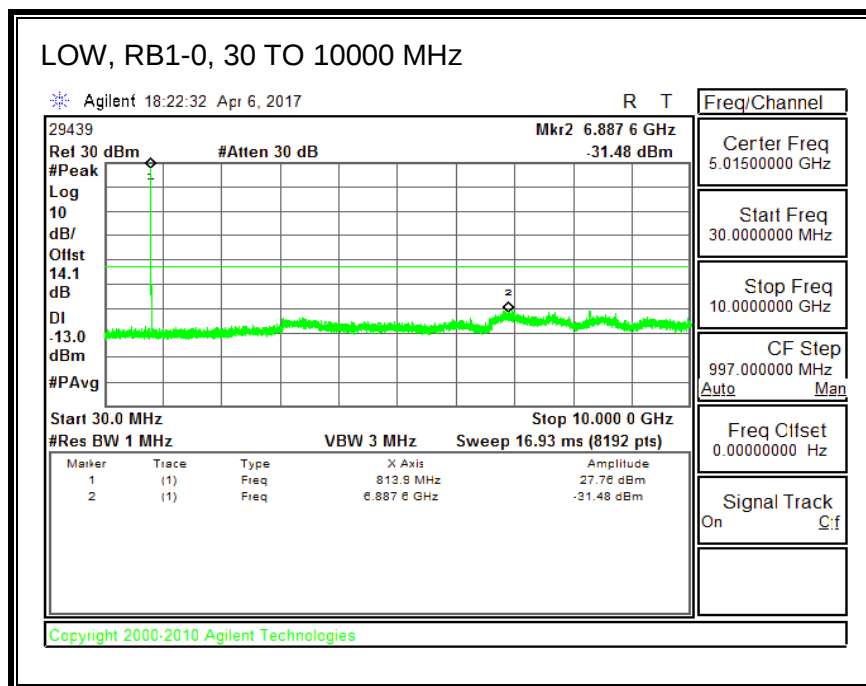


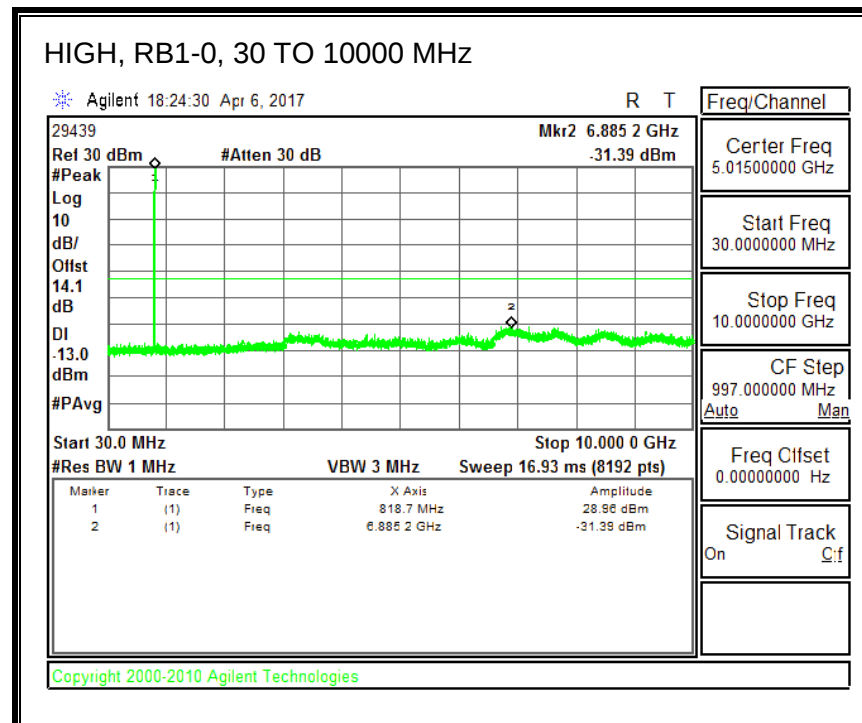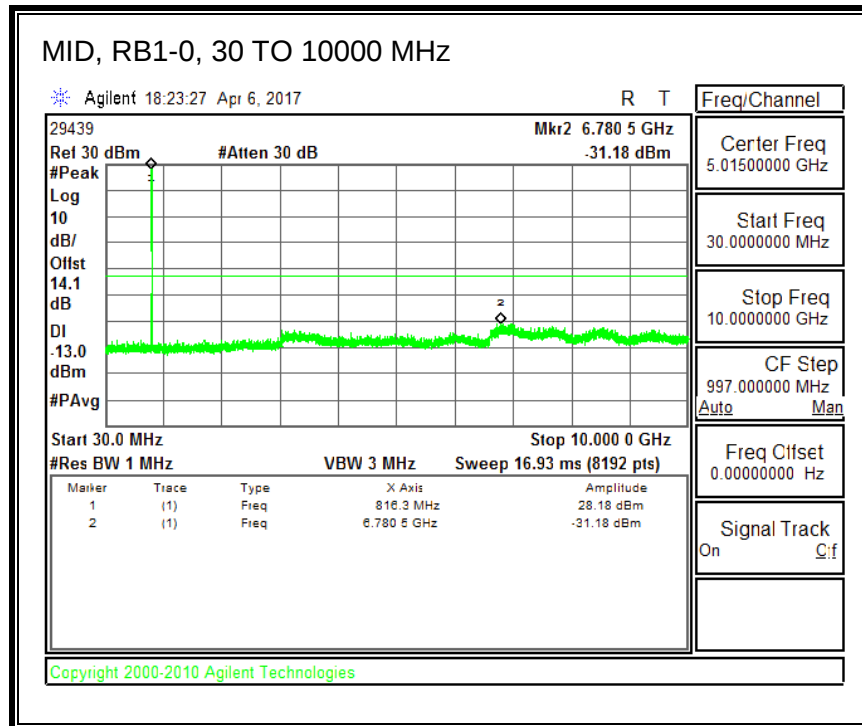

QPSK, (10.0 MHz BAND WIDTH)


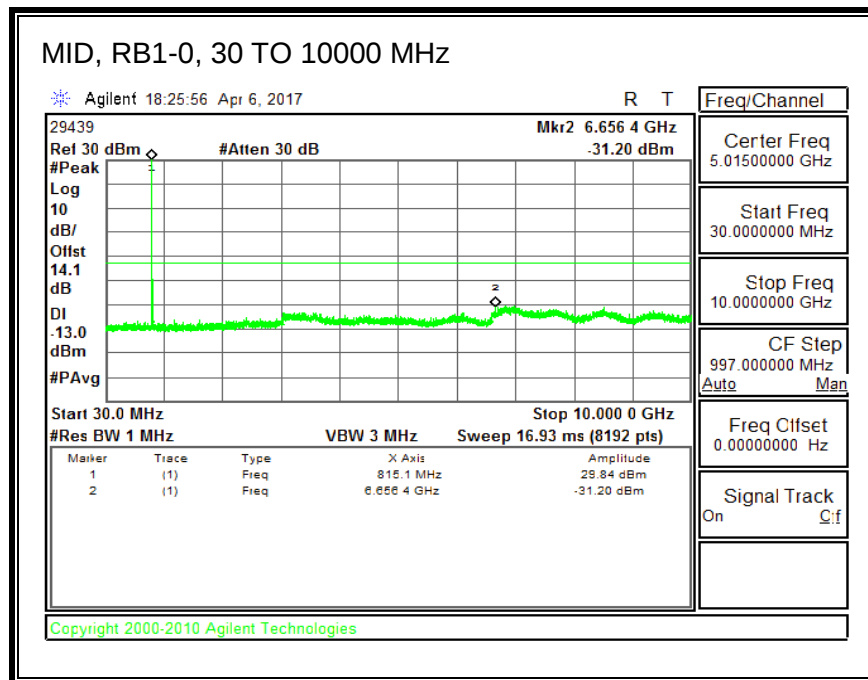




16QAM, (10.0 MHz BAND WIDTH)


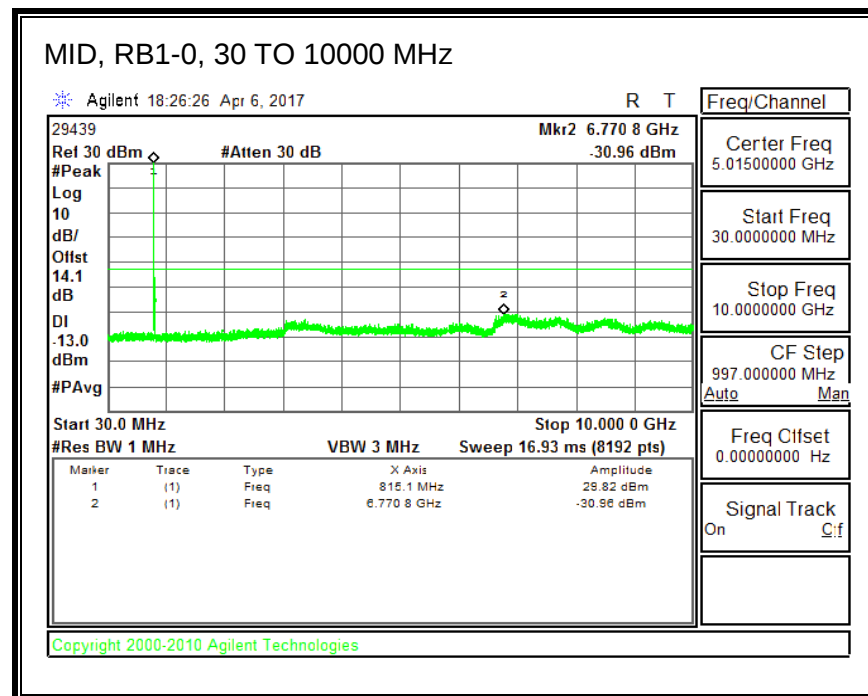


8.2.10. LTE BAND 30



QPSK, (5.0 MHz BAND WIDTH)

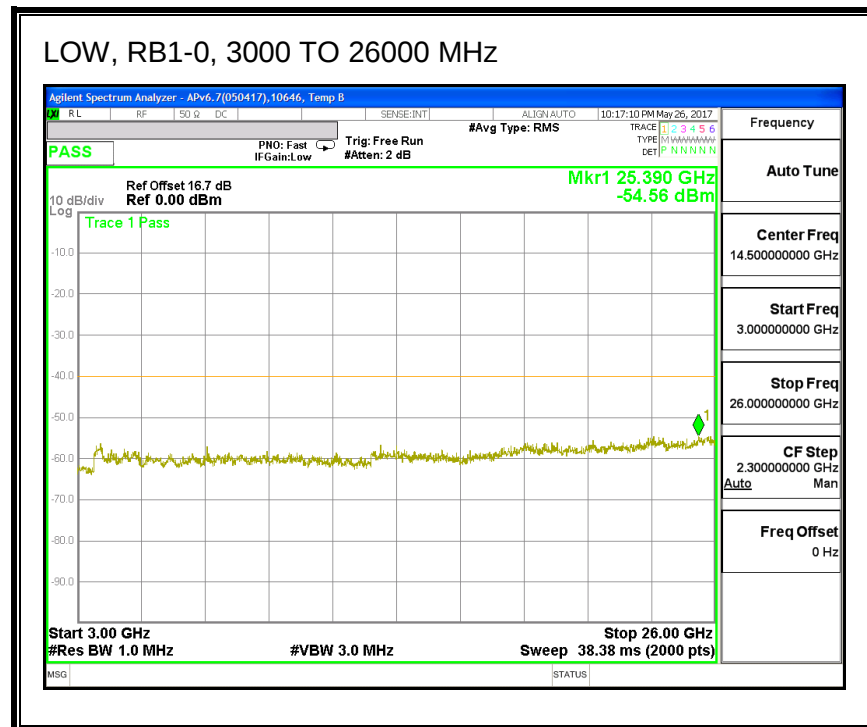
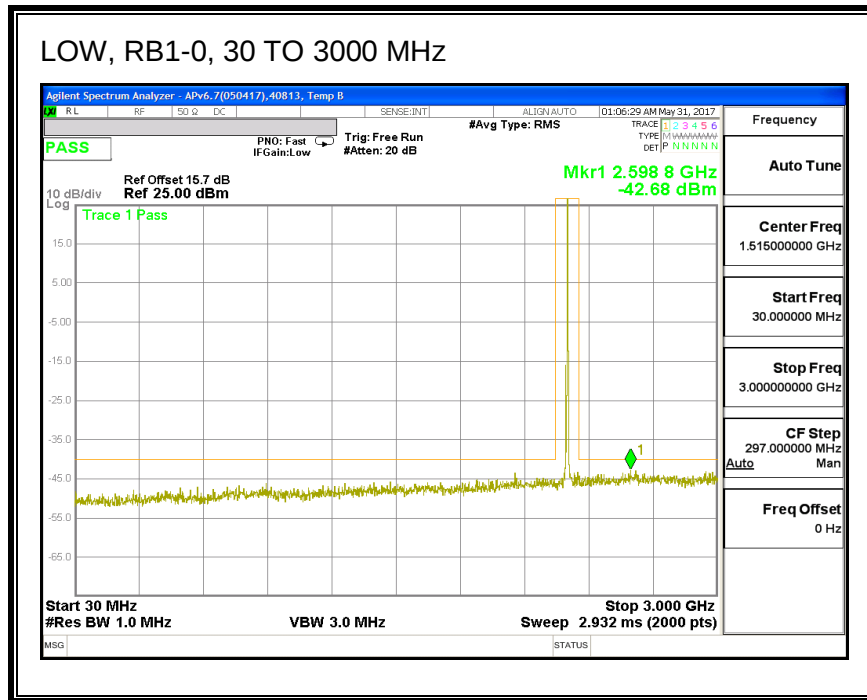


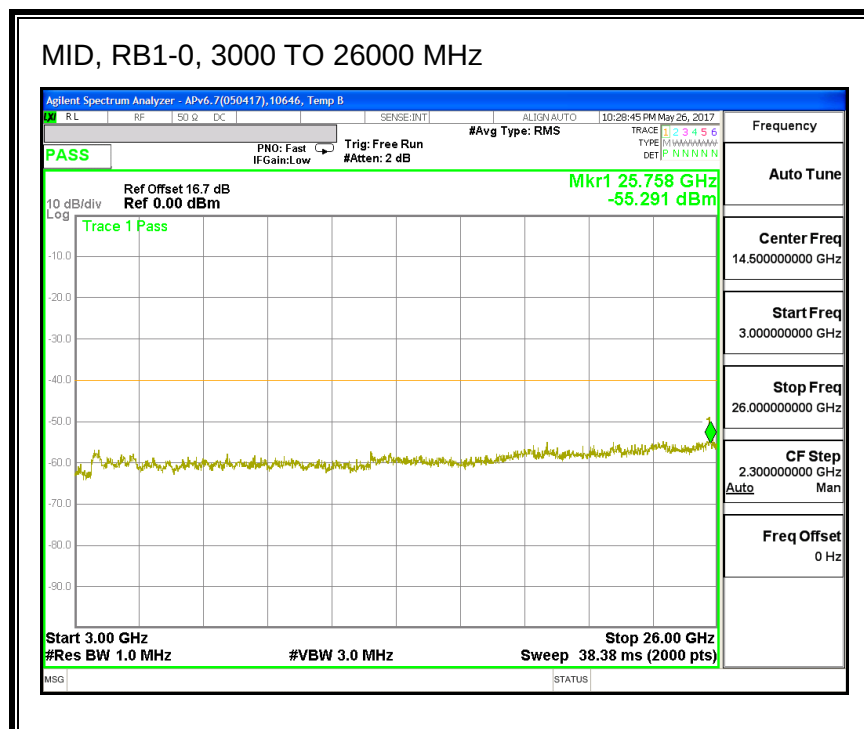
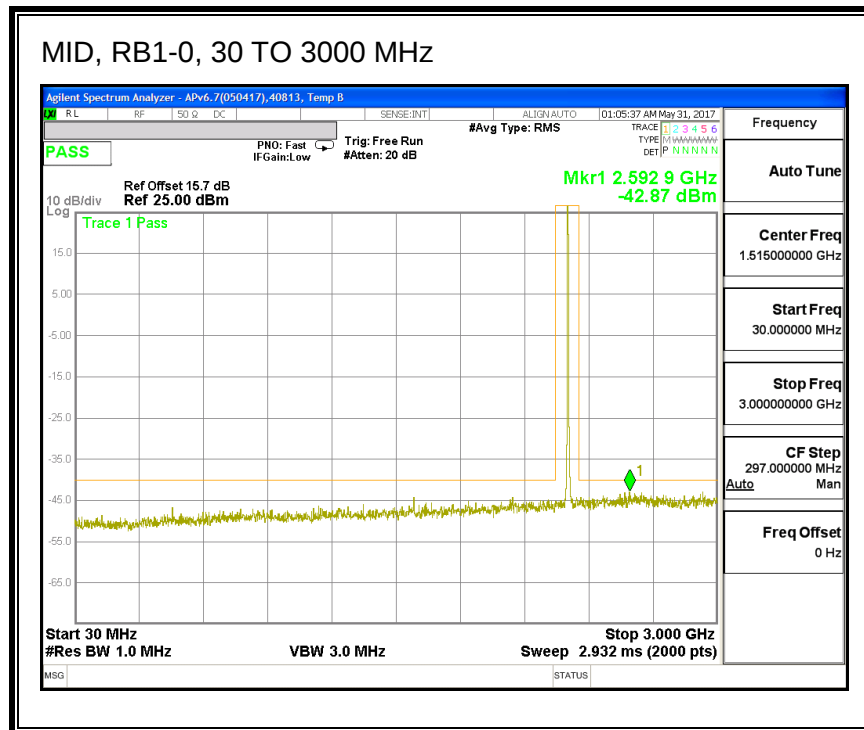


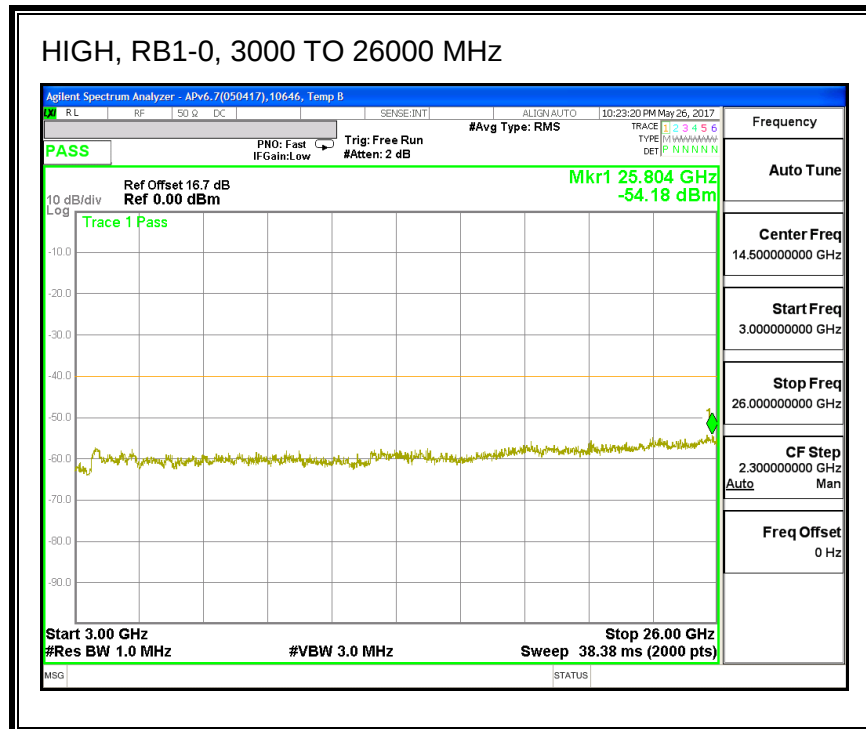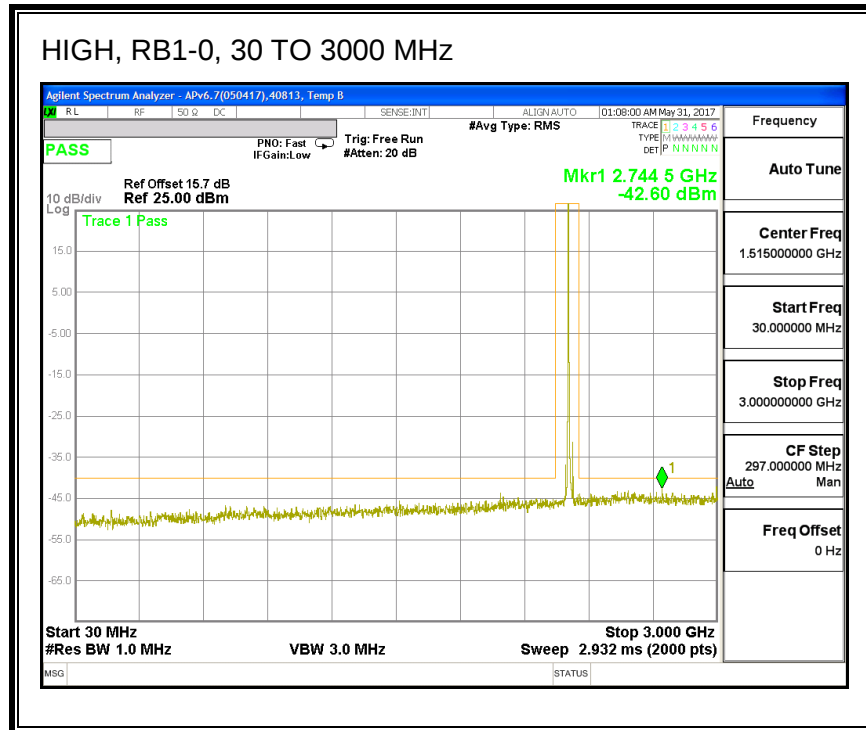



16QAM, (5.0 MHz BAND WIDTH)

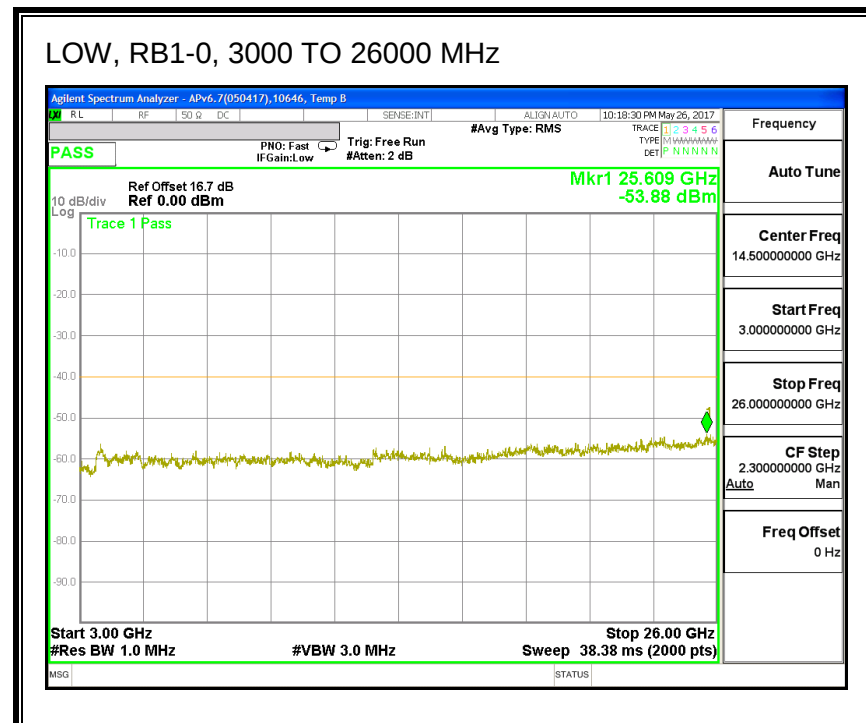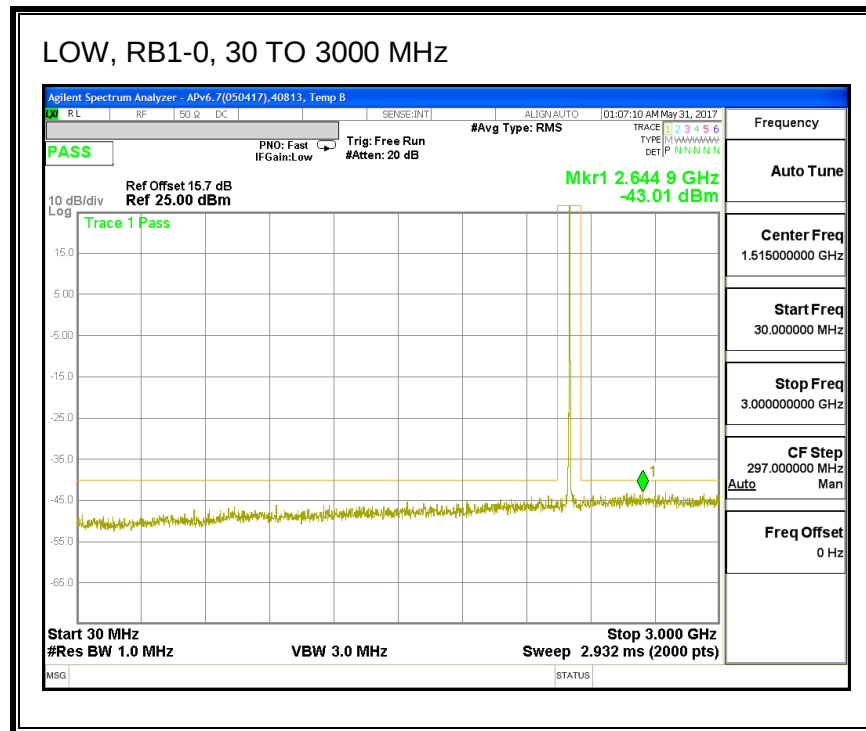

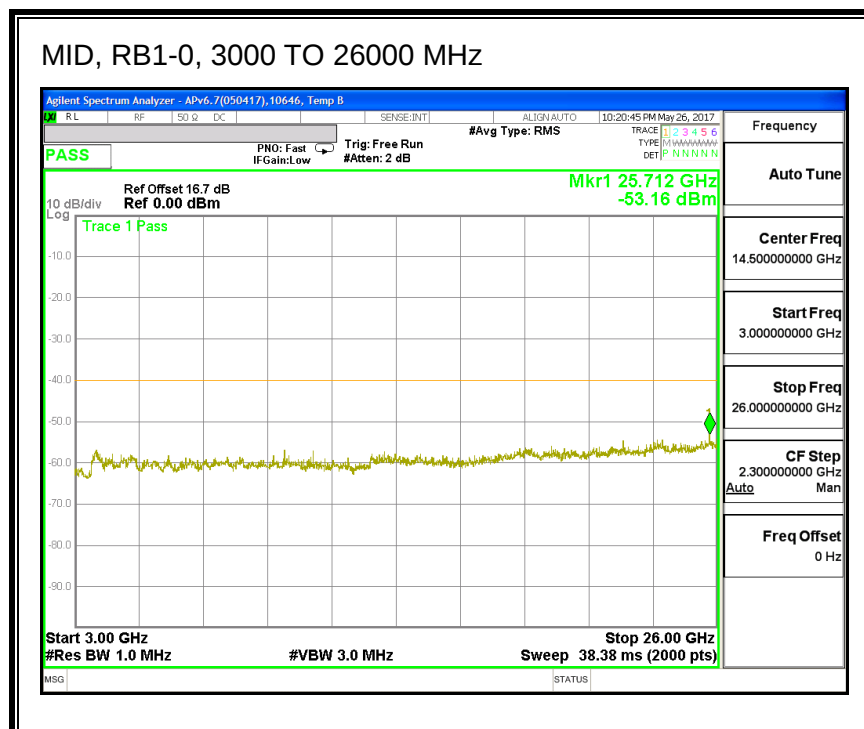
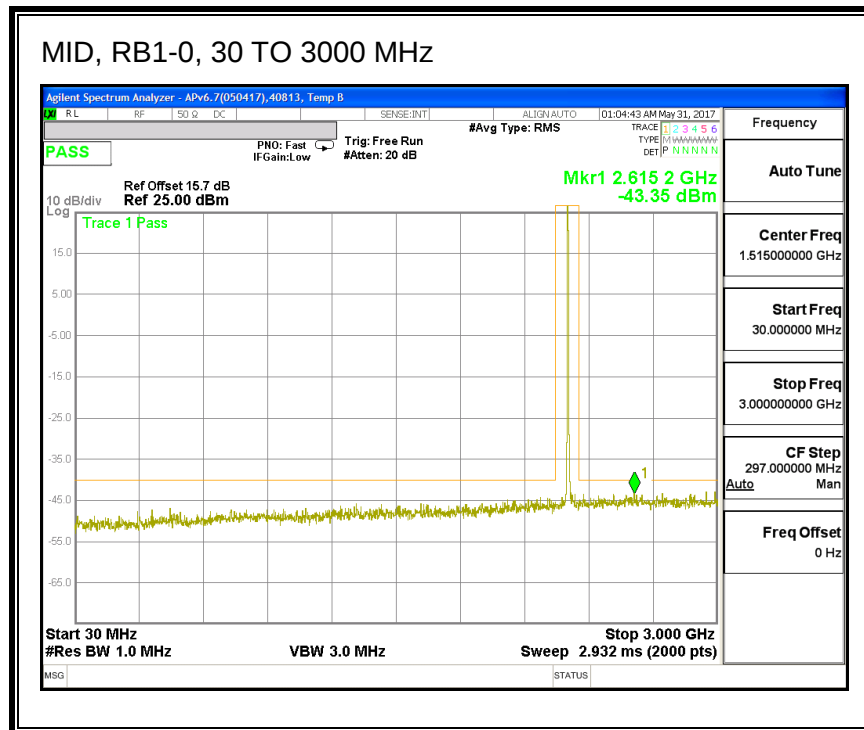


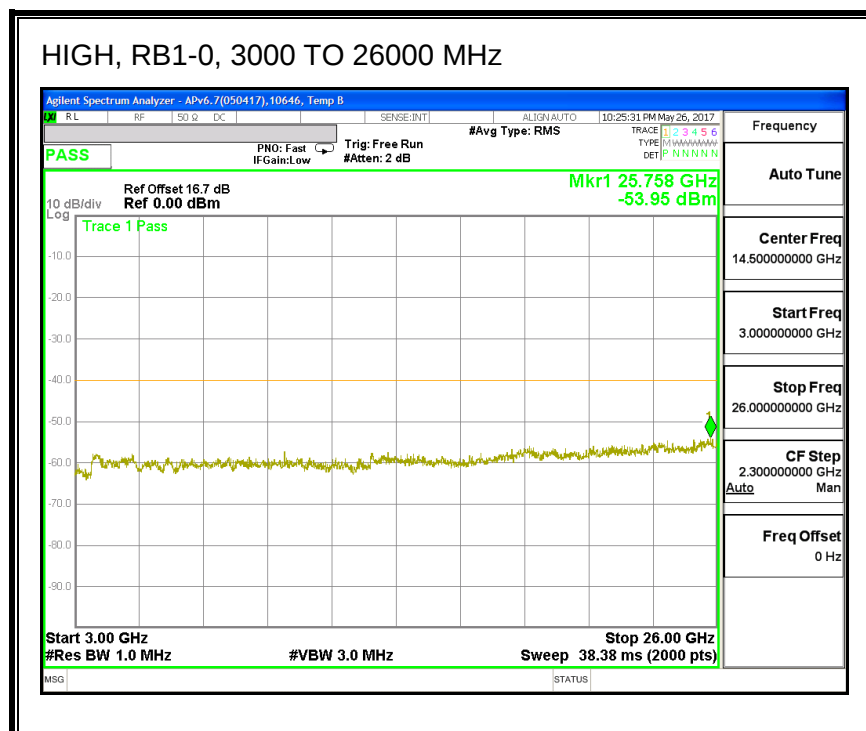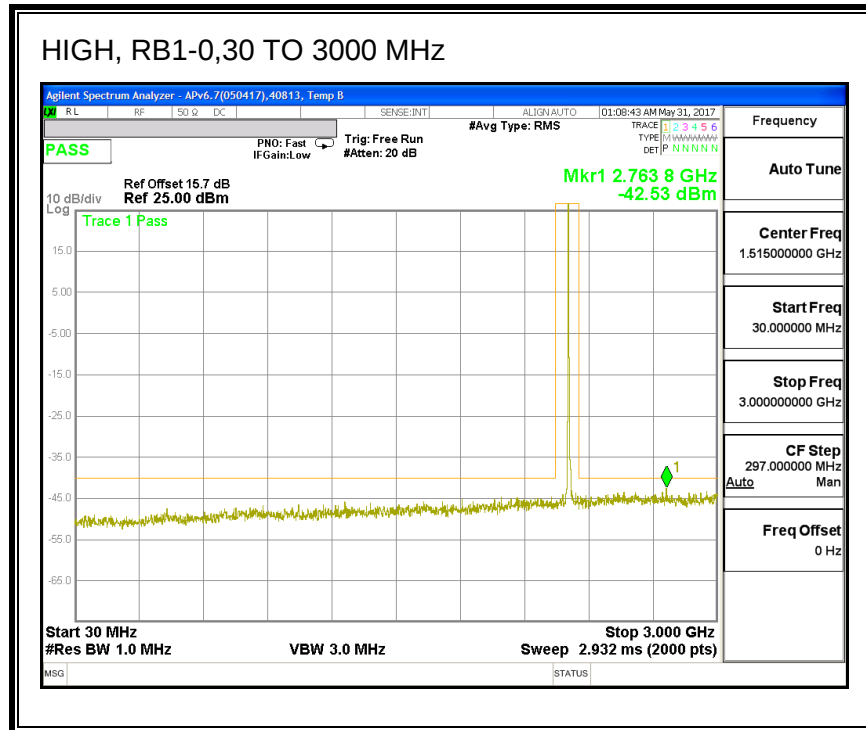

QPSK, (10.0 MHz BAND WIDTH)

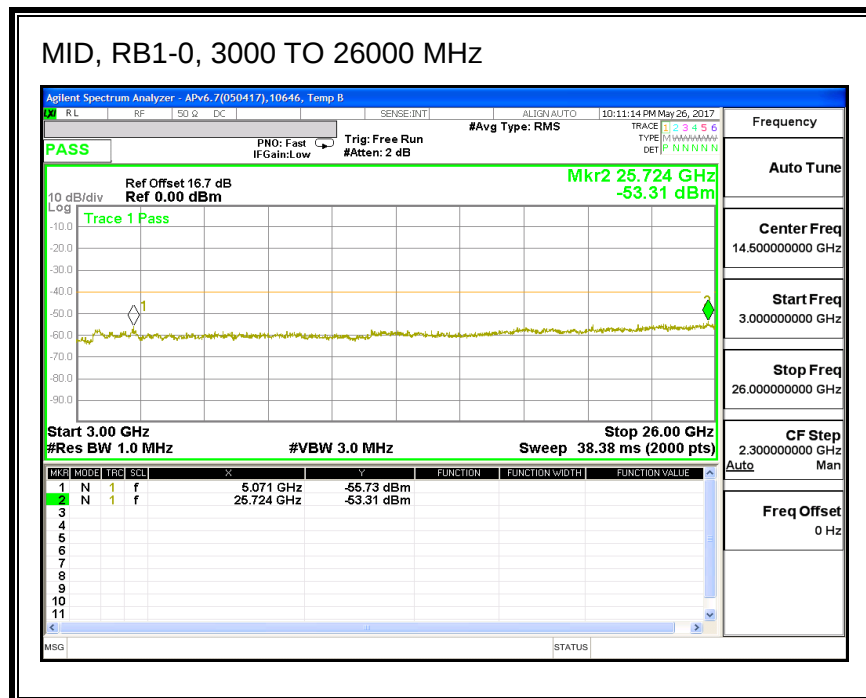
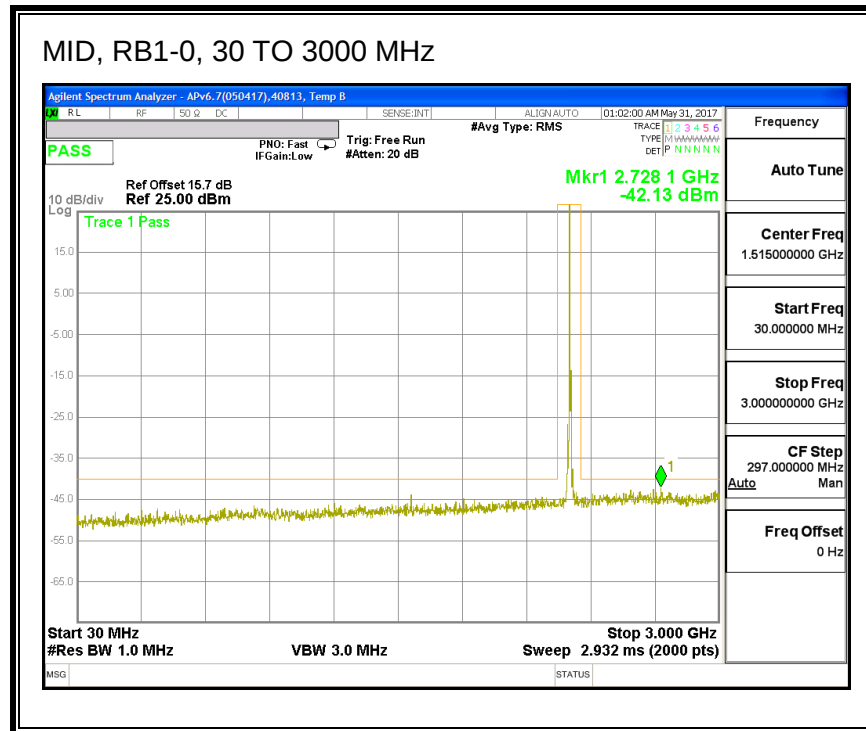


16QAM, (10.0 MHz BAND WIDTH)

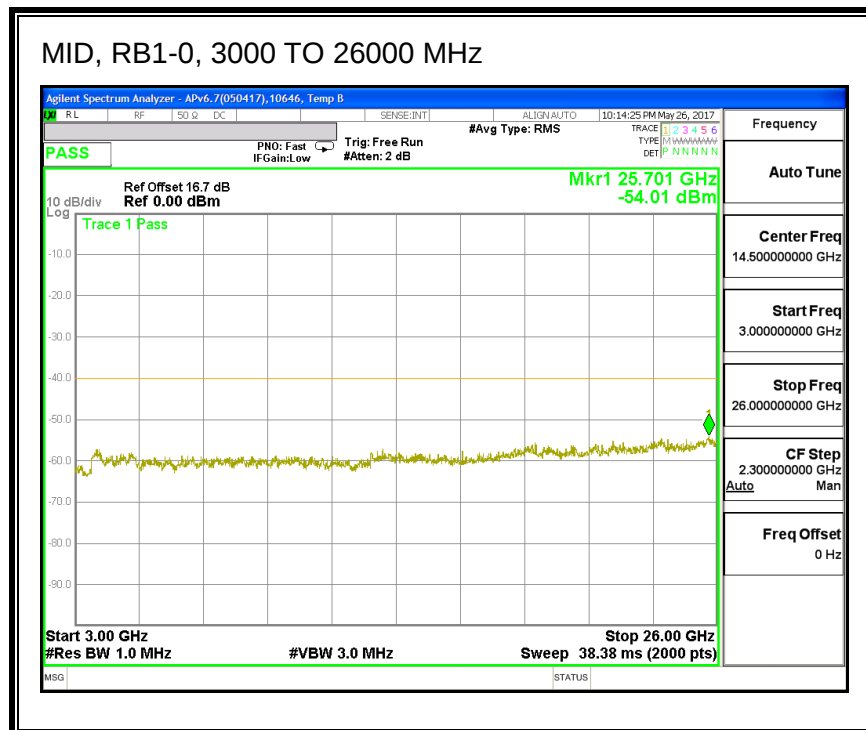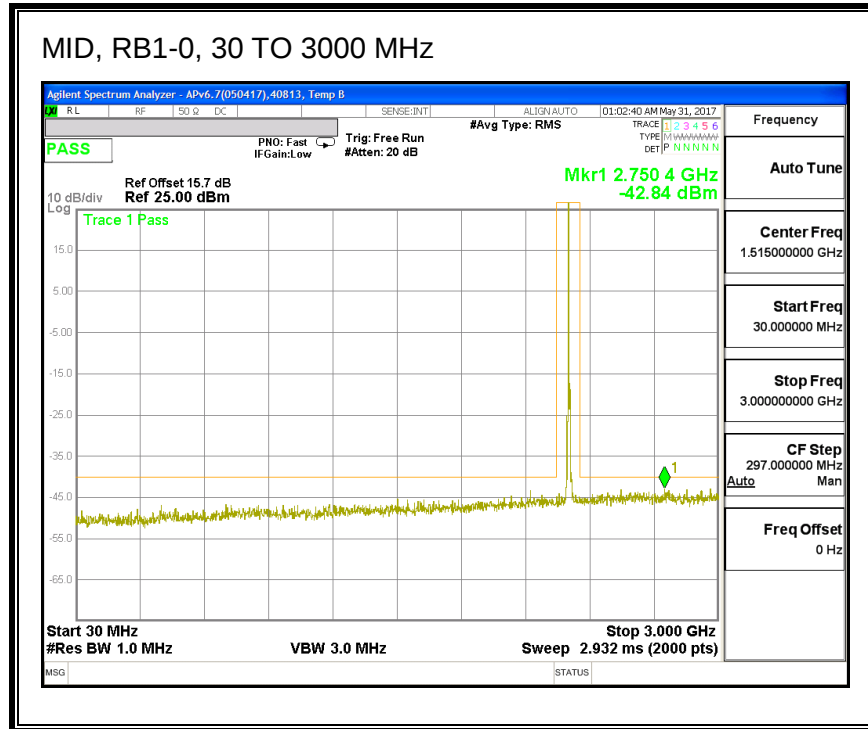


8.2.11. LTE BAND 41

QPSK, (5.0 MHz BAND WIDTH)

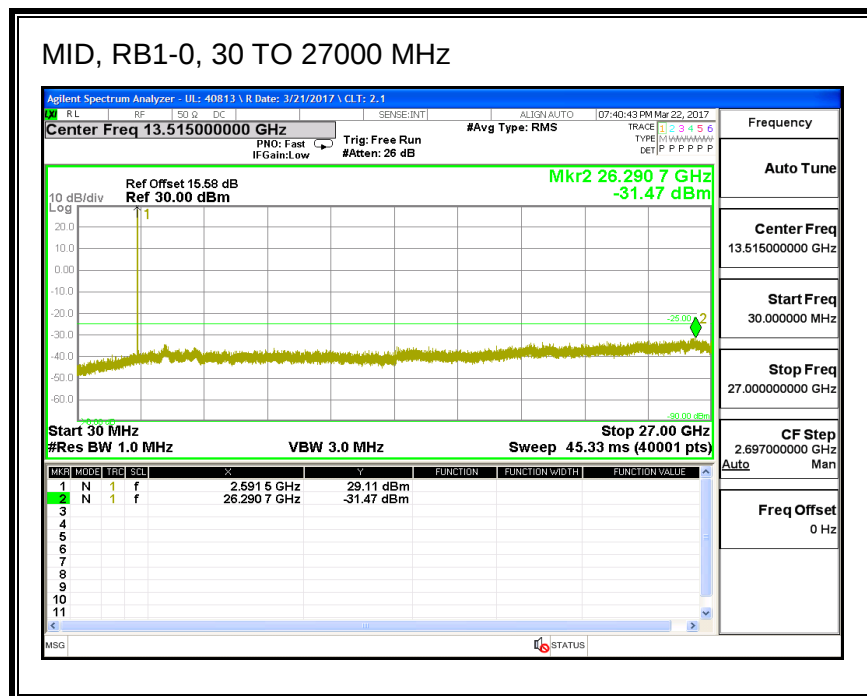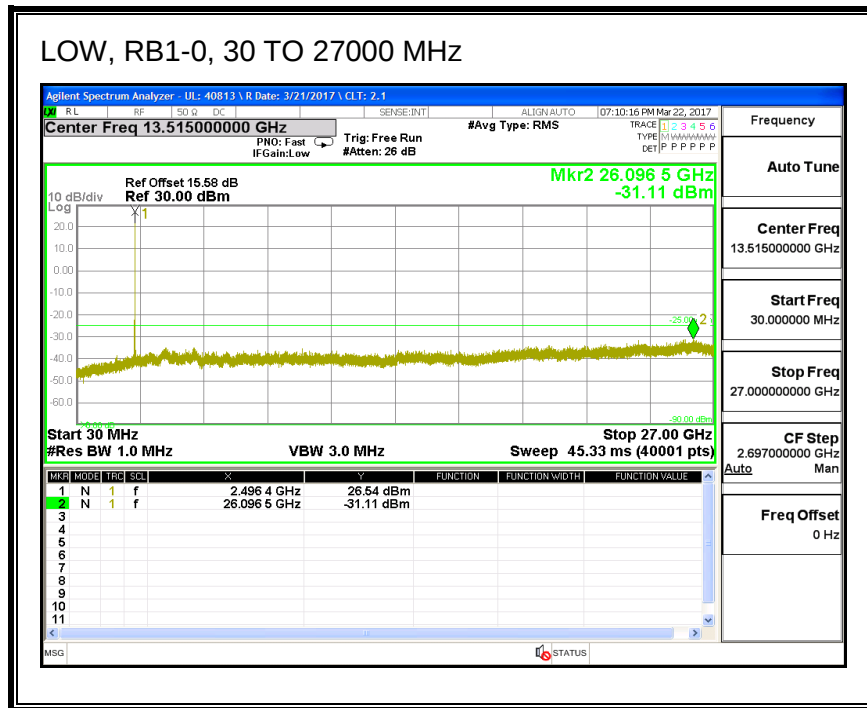


HIGH, RB1-0, 30 TO 27000 MHz

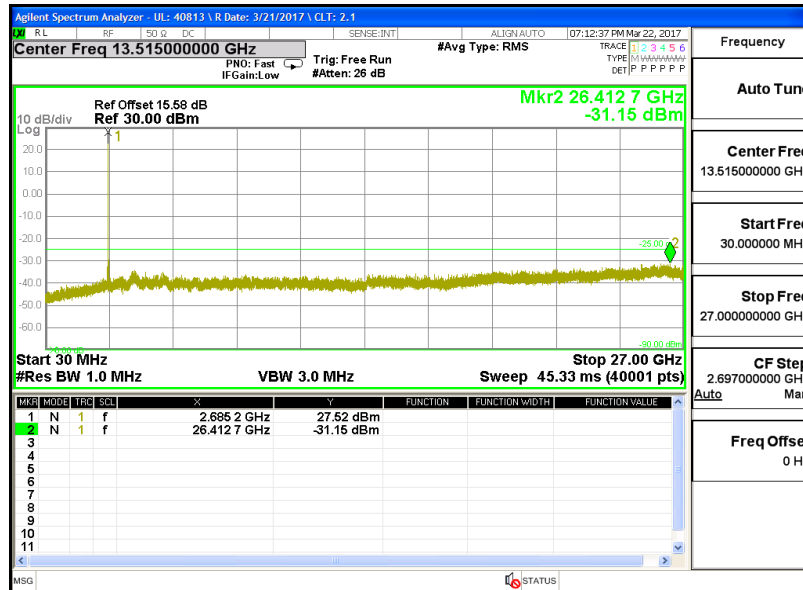


16QAM, (5.0 MHz BAND WIDTH)


LOW, RB1-0, 30 TO 27000 MHz

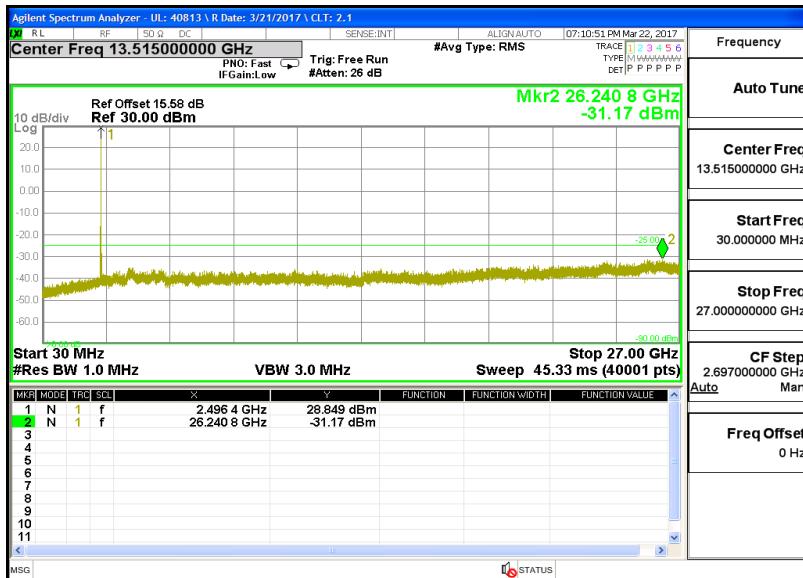



MID, RB1-0, 30 TO 27000 MHz

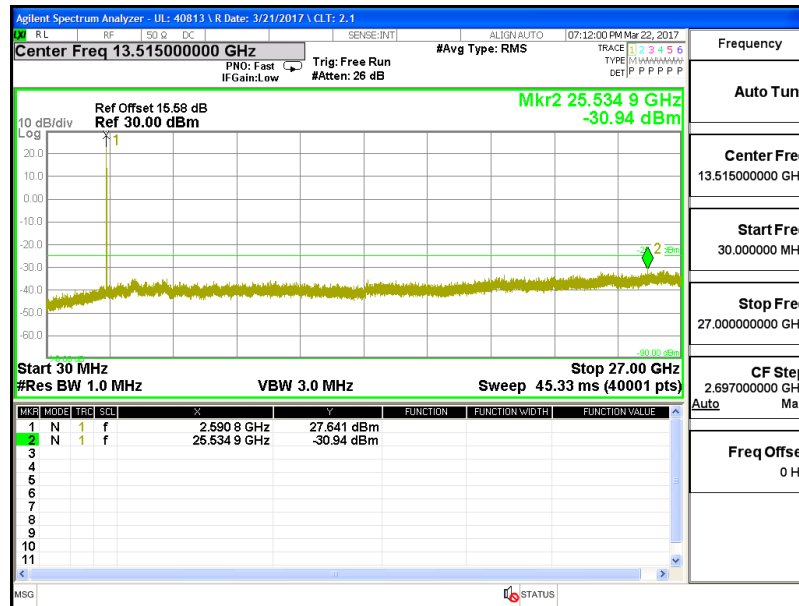


HIGH, RB1-0, 30 TO 27000 MHz

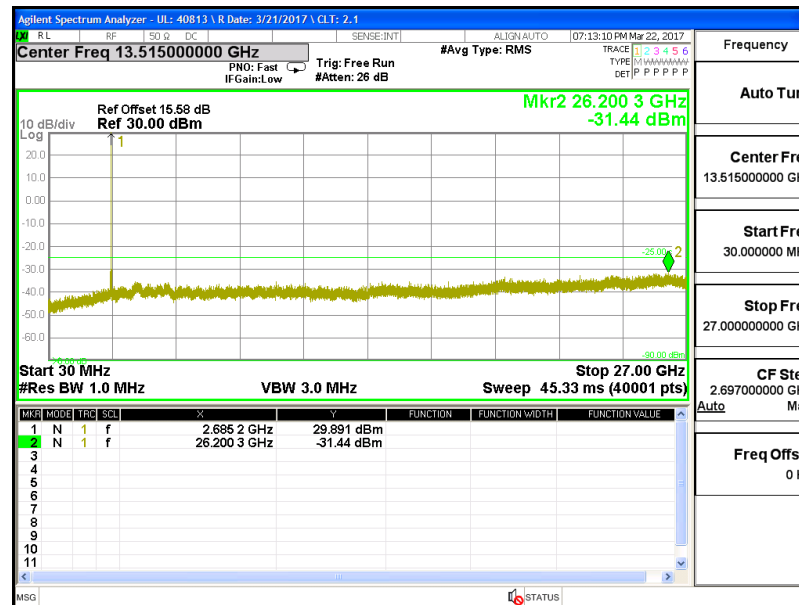




QPSK, (10.0 MHz BAND WIDTH)

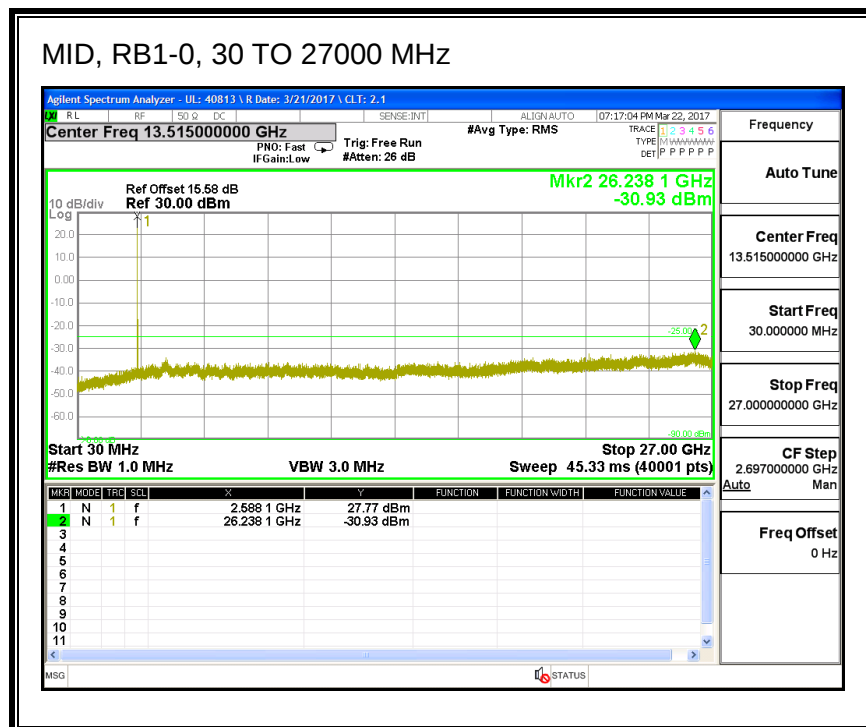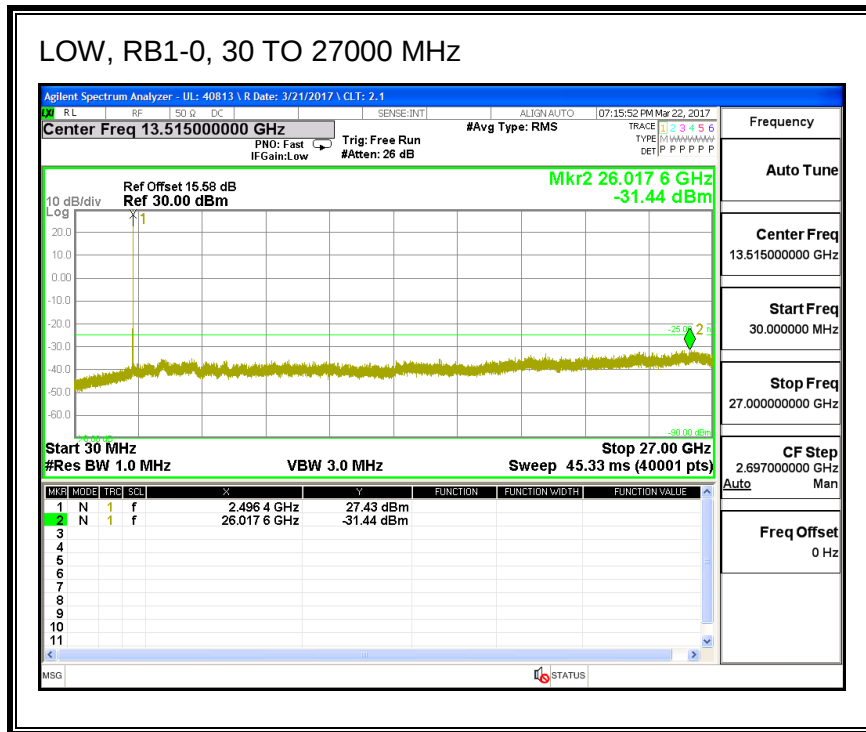


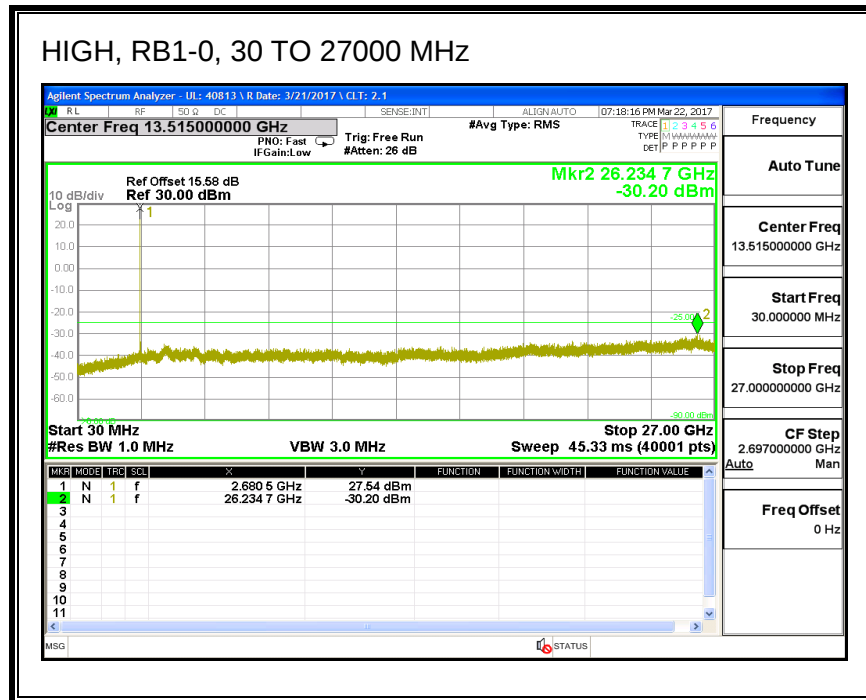



16QAM, (10.0 MHz BAND WIDTH)

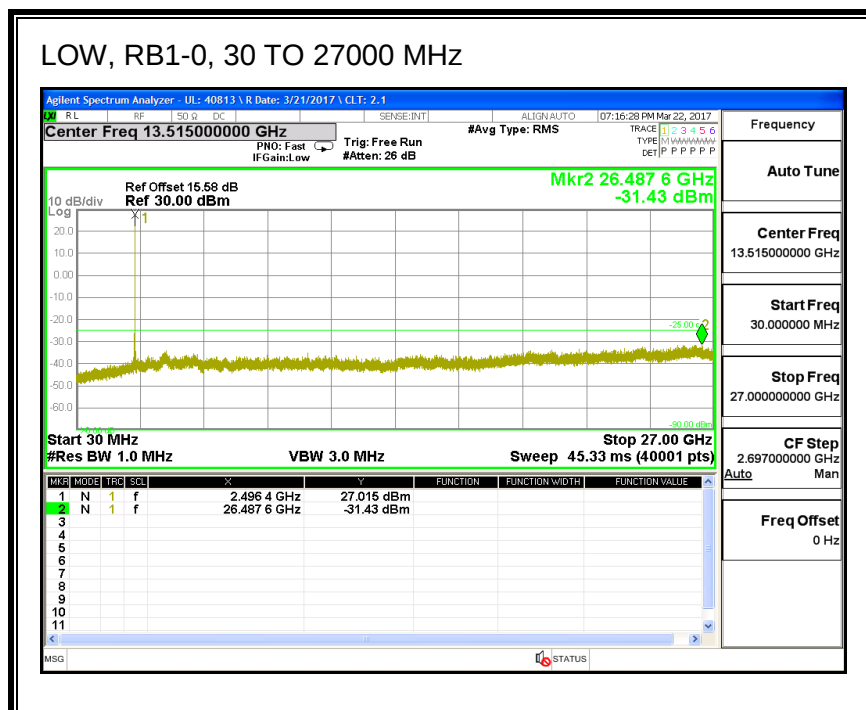

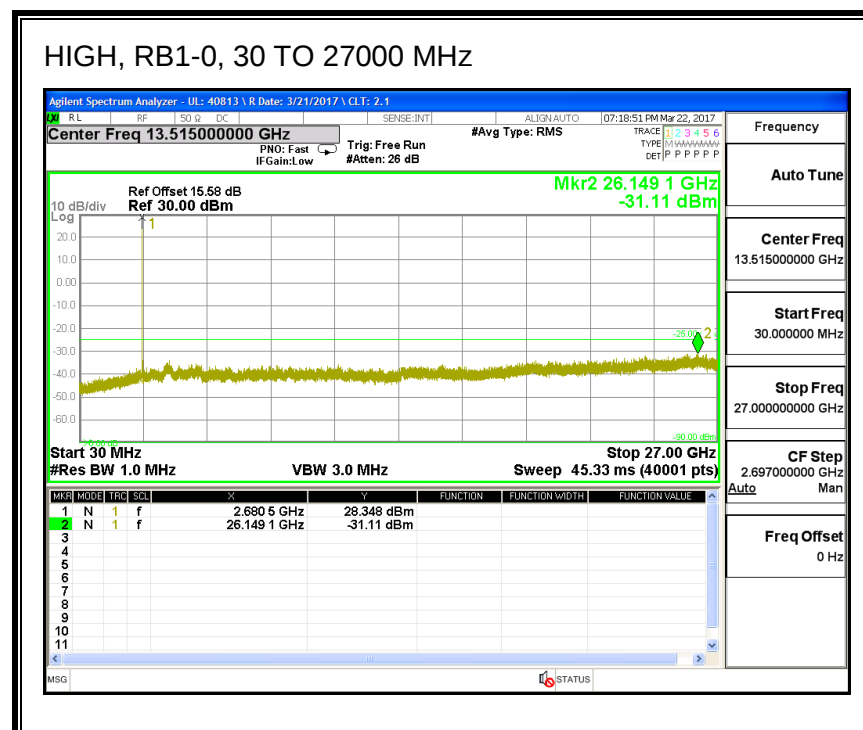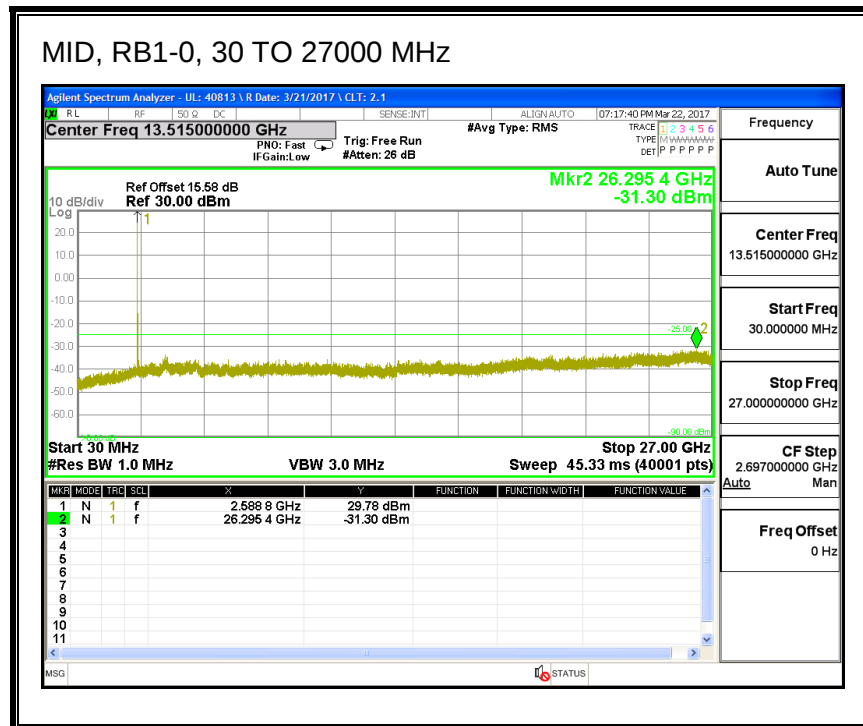


QPSK, (15.0 MHz BAND WIDTH)

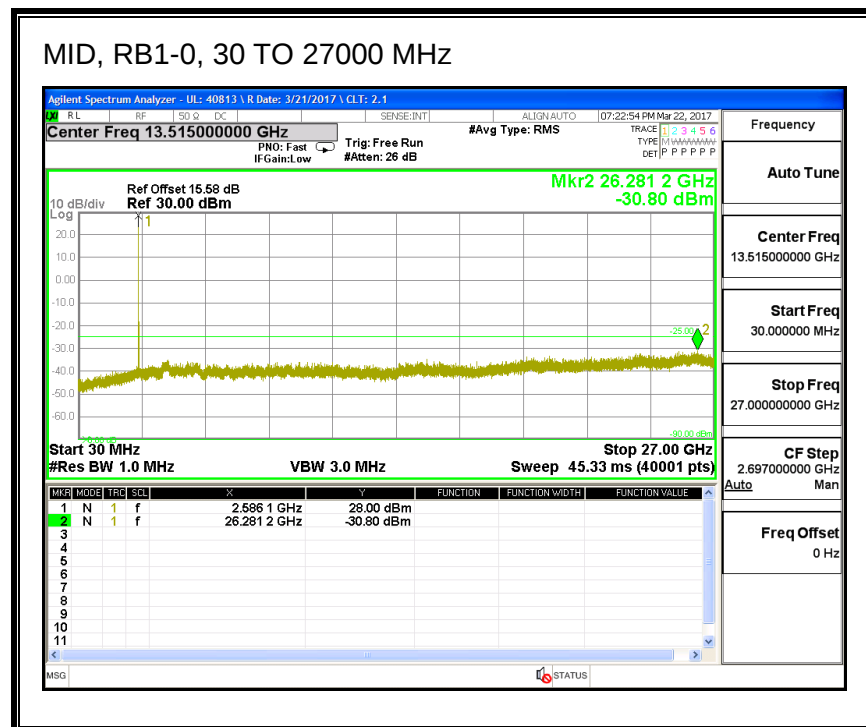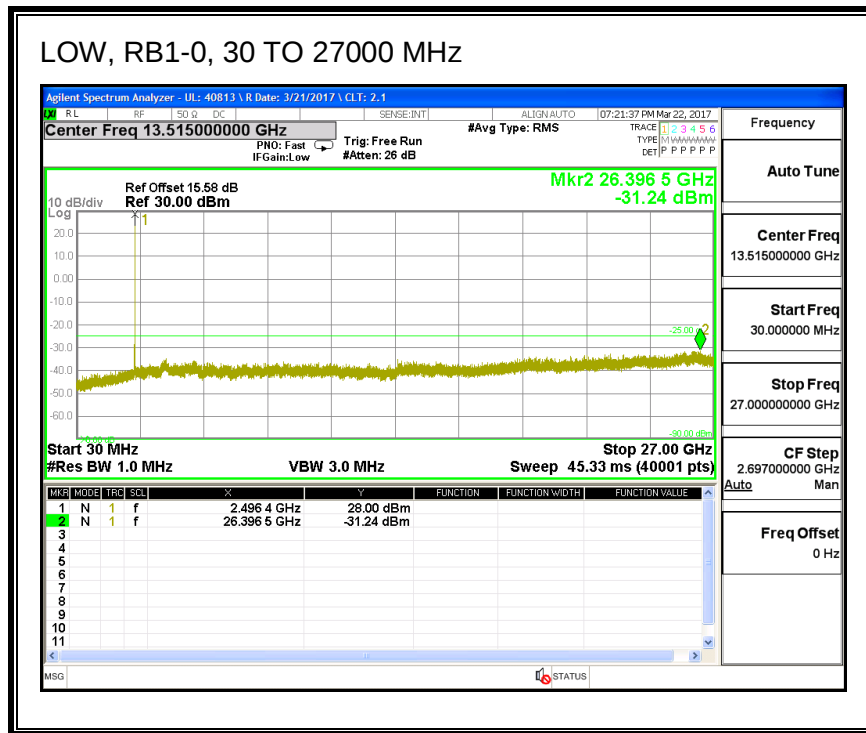


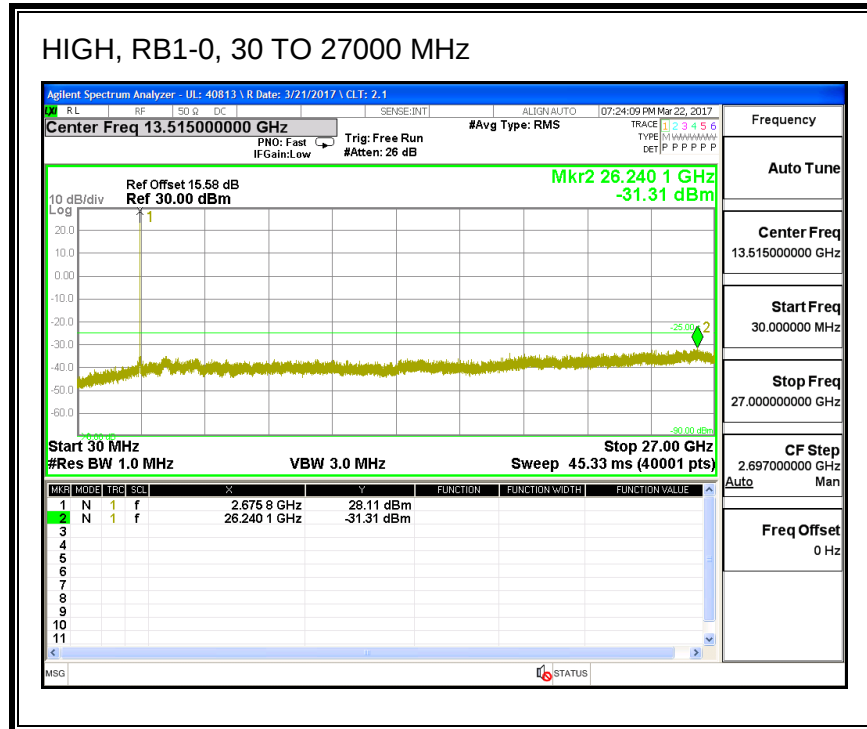


16QAM, (15.0 MHz BAND WIDTH)

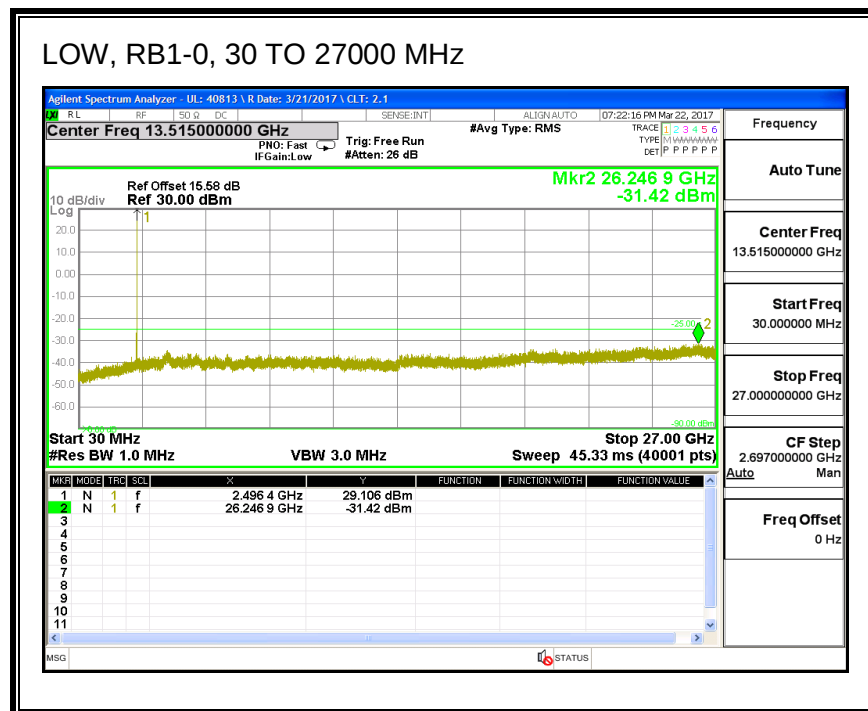



MID, RB1-0, 30 TO 27000 MHz

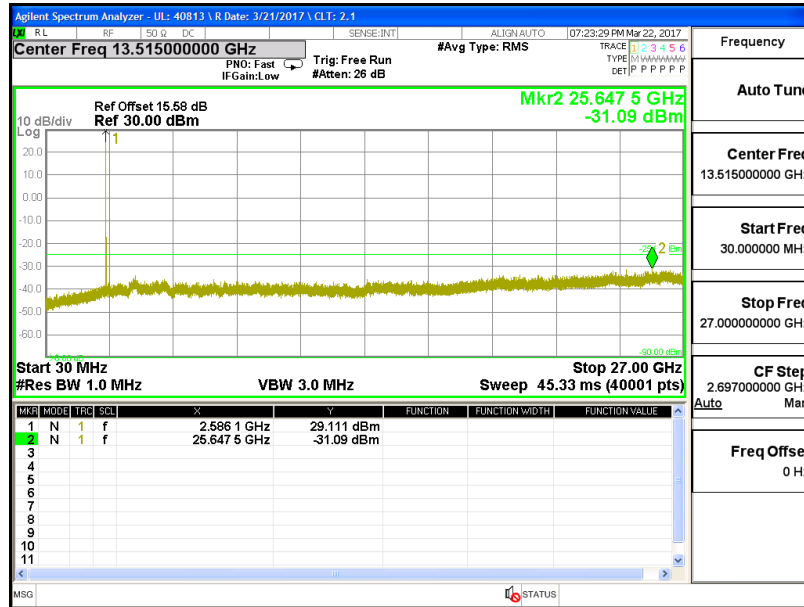


HIGH, RB1-0, 30 TO 27000 MHz

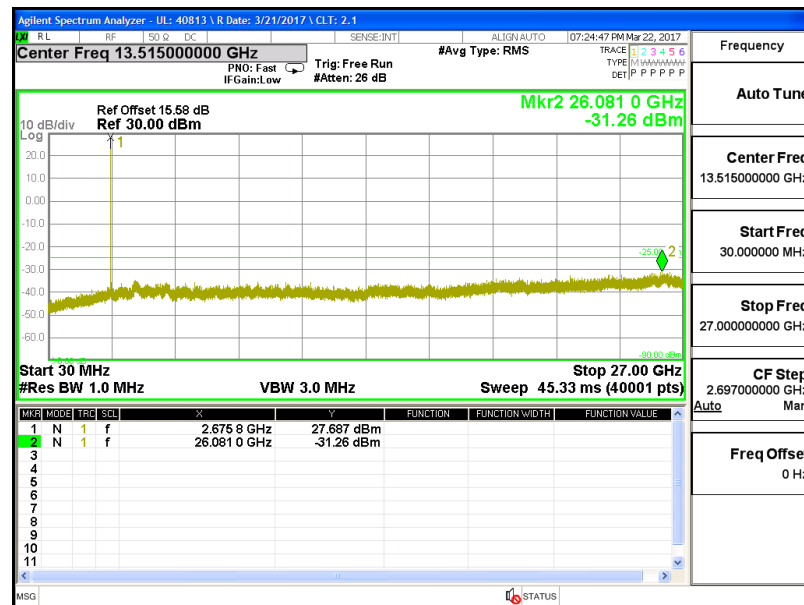




QPSK, (20.0 MHz BAND WIDTH)

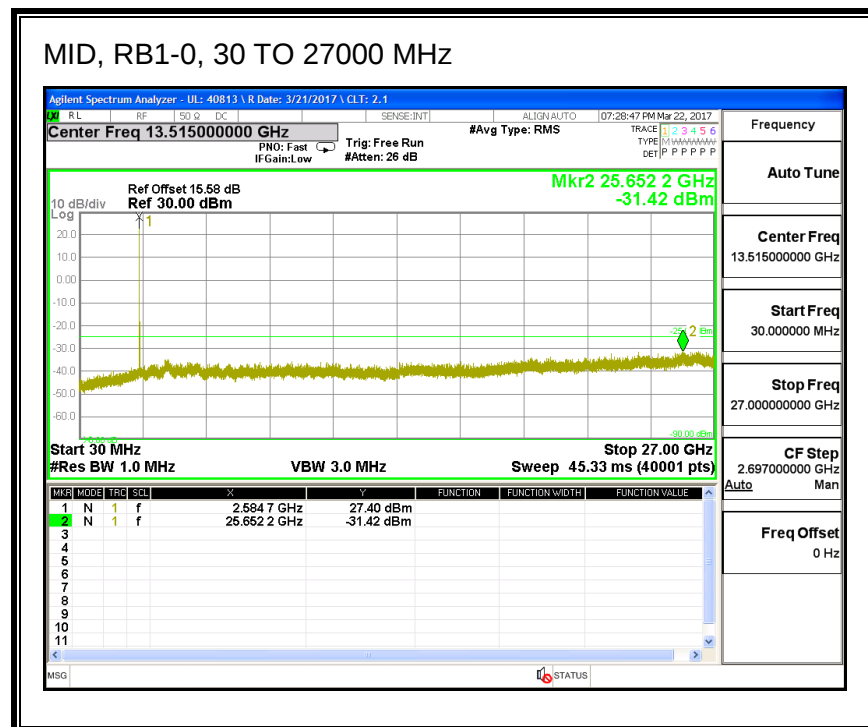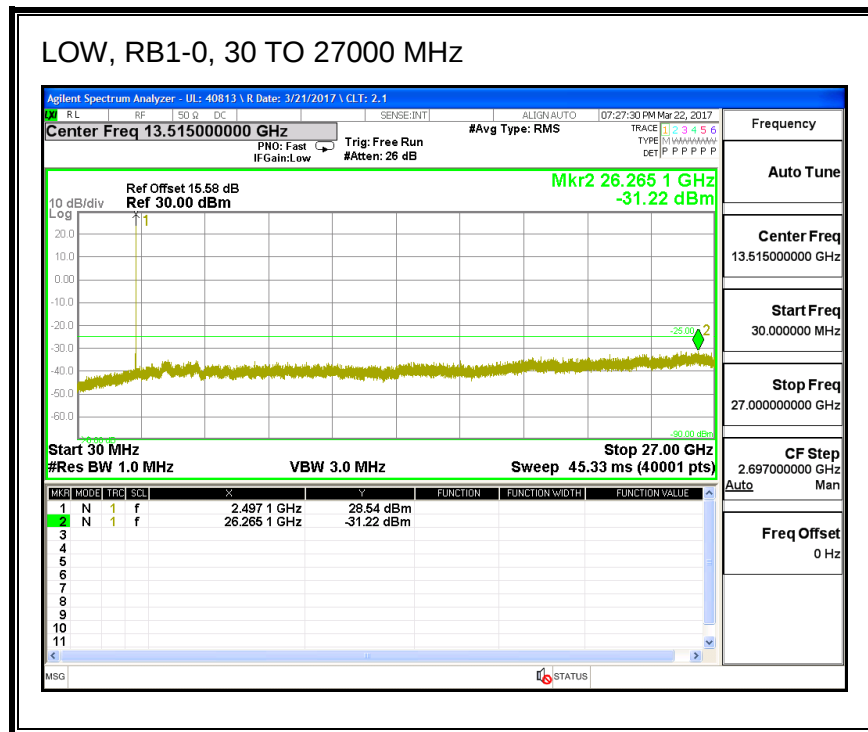

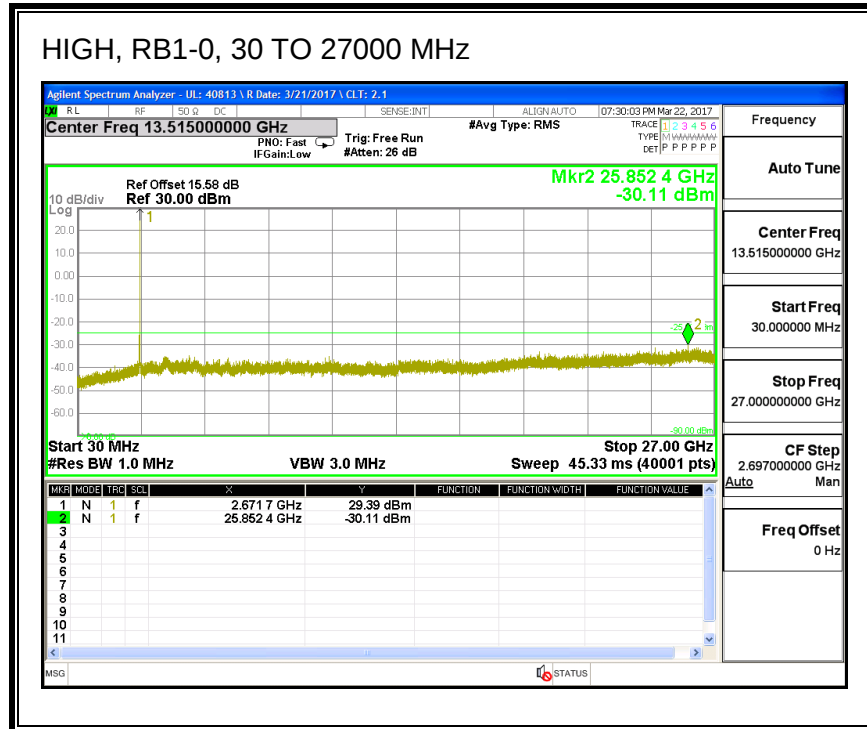



16QAM, (20.0 MHz BAND WIDTH)

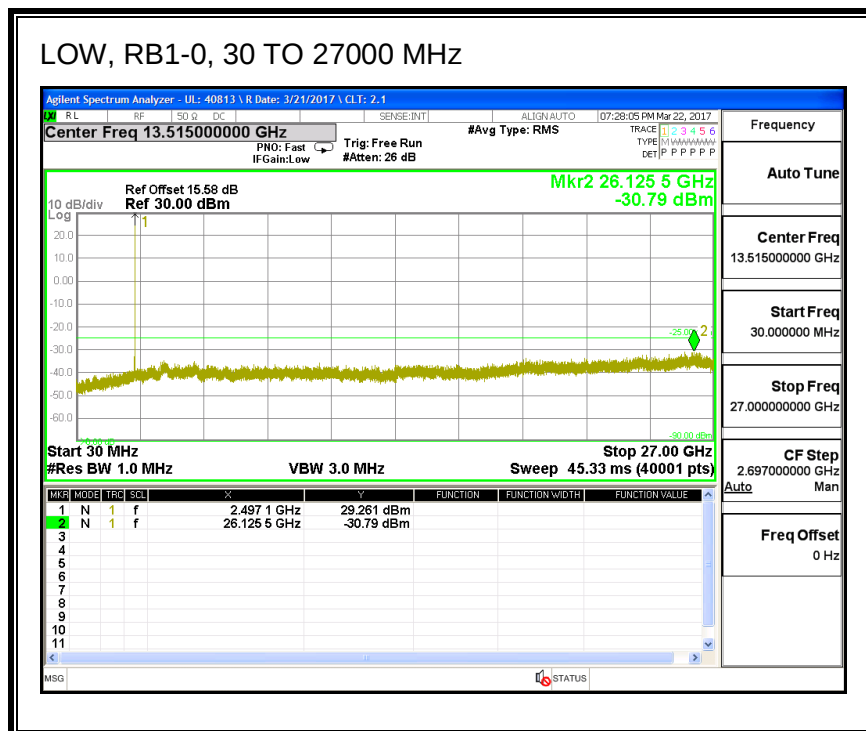


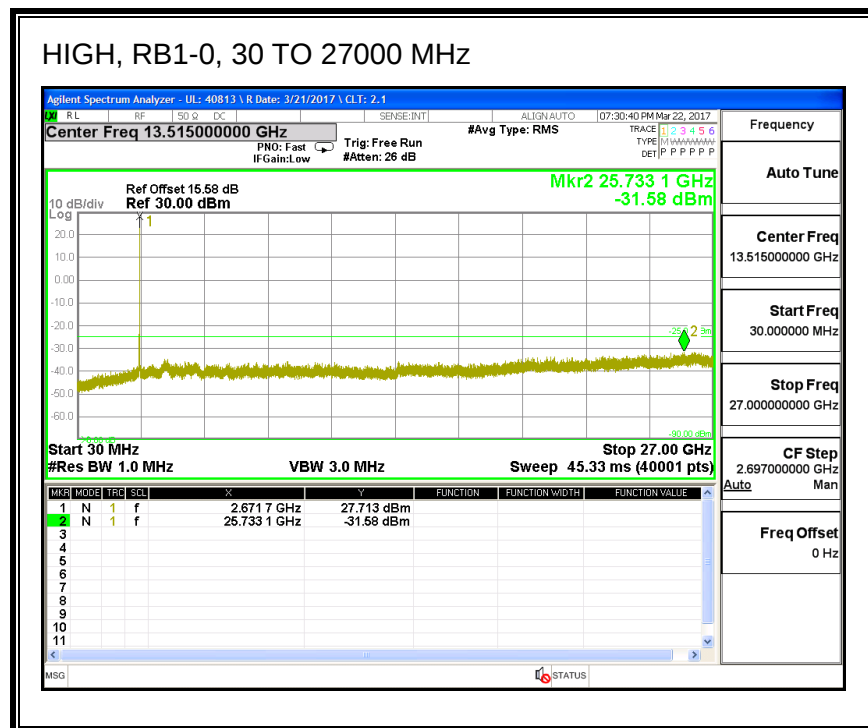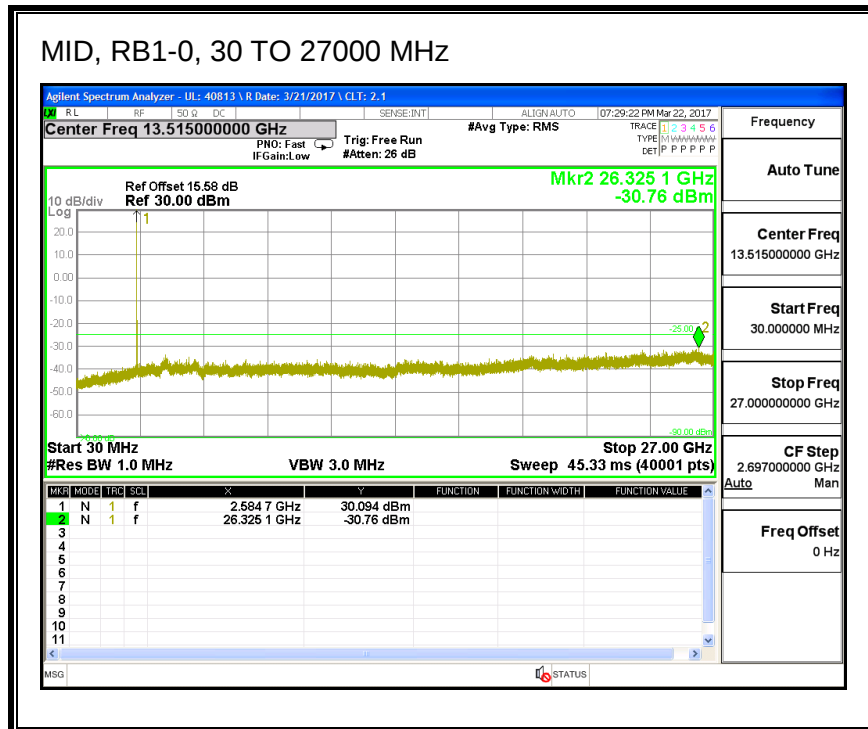


8.2.12. LTE BAND 66



QPSK, (5.0 MHz BAND WIDTH)

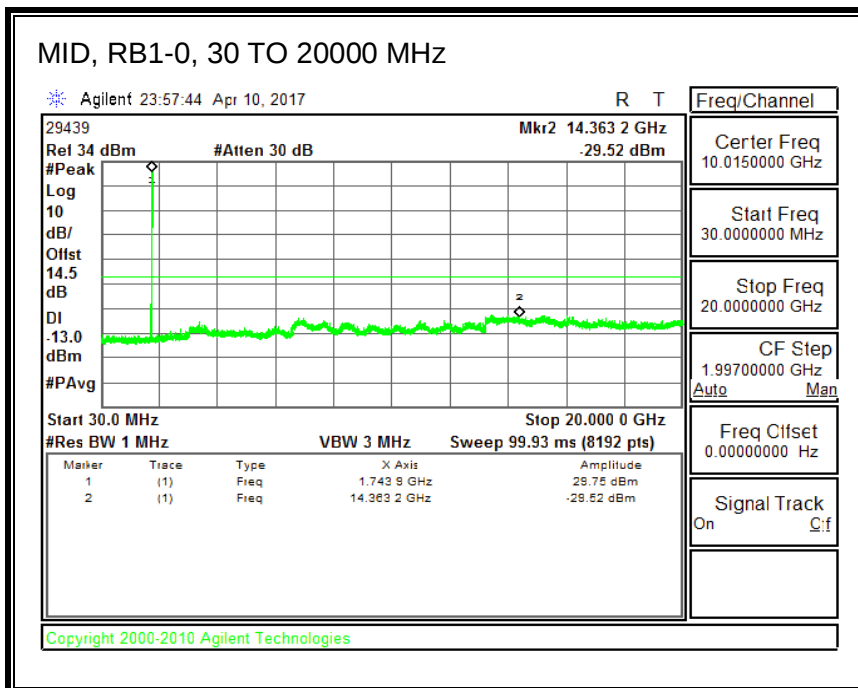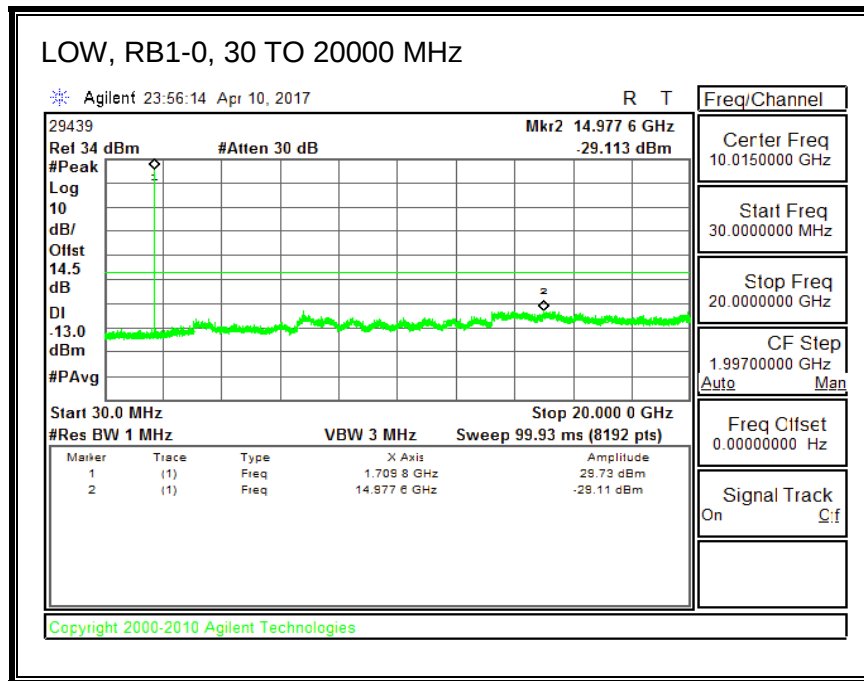


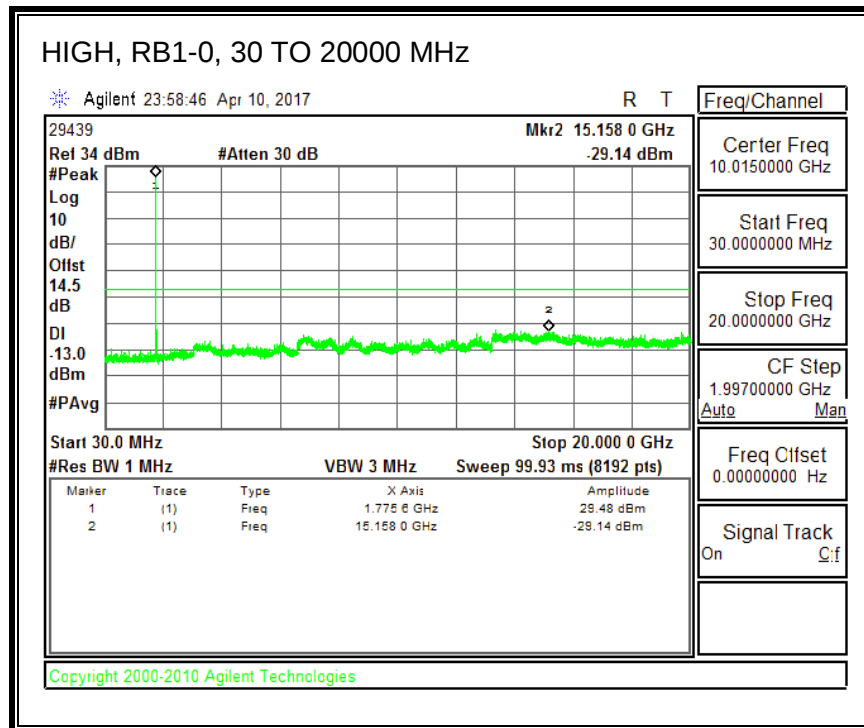



16QAM, (5.0 MHz BAND WIDTH)

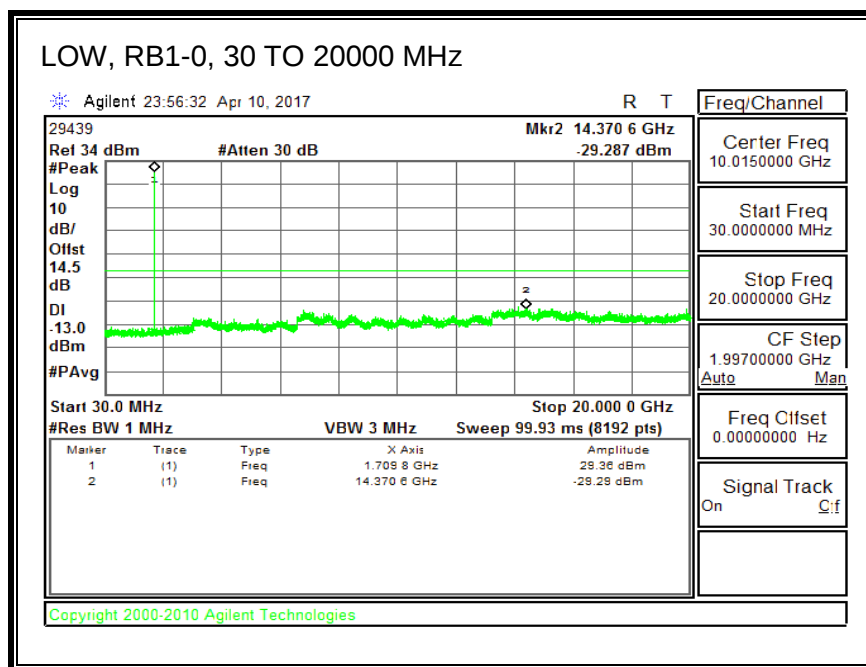

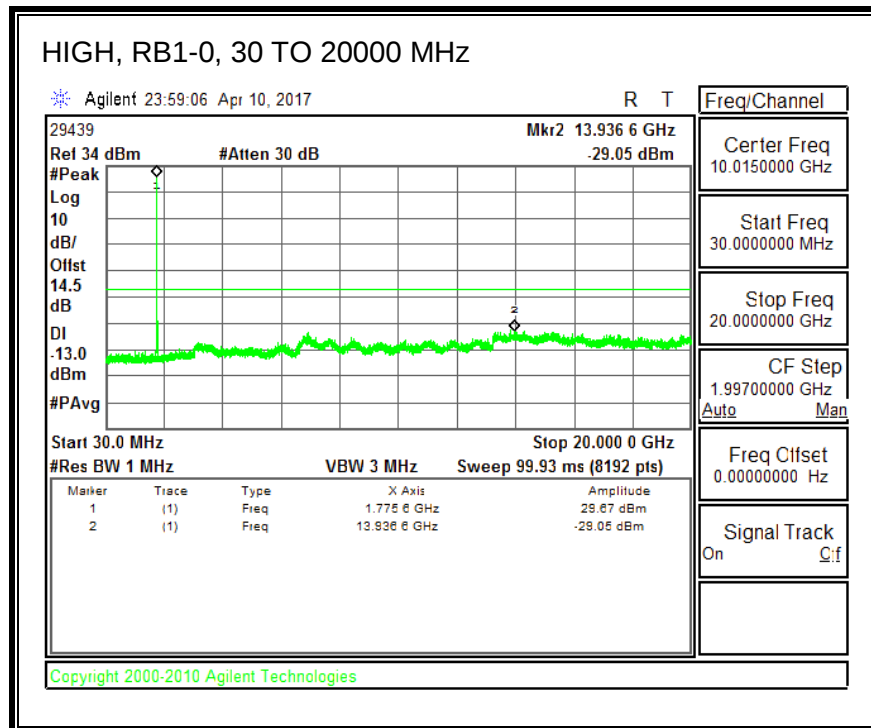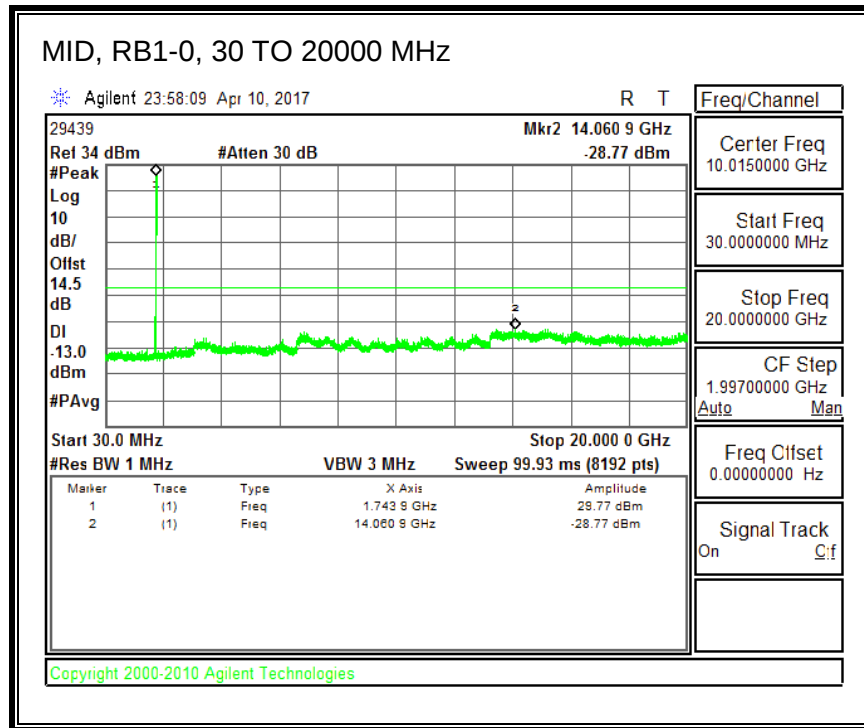




QPSK, (10.0 MHz BAND WIDTH)

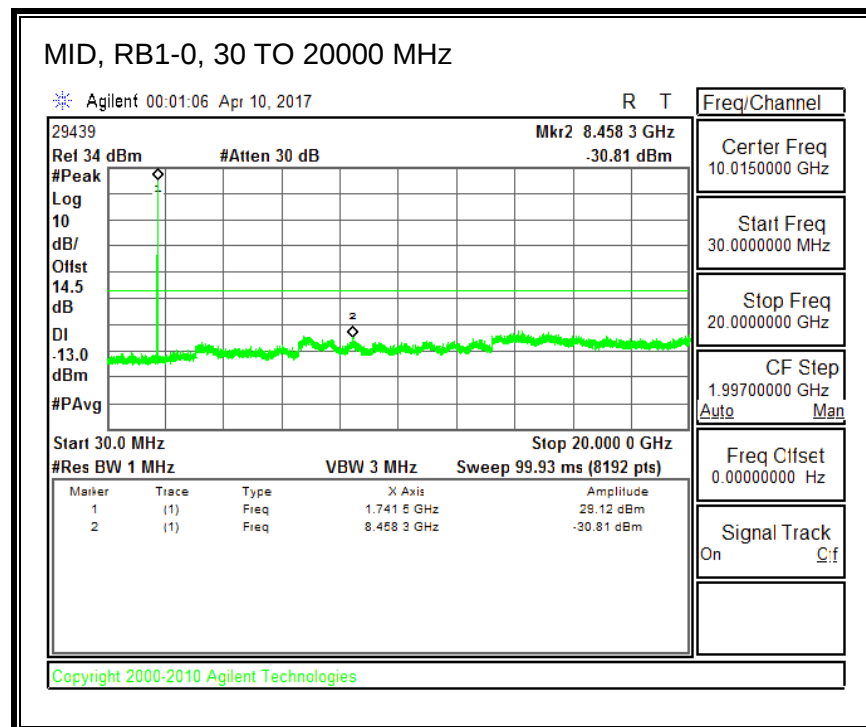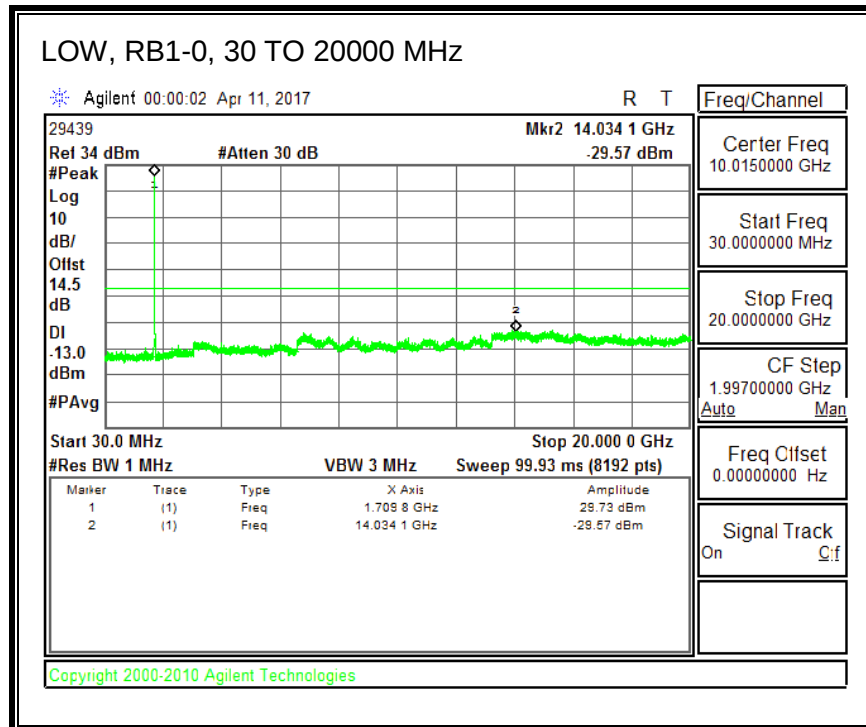


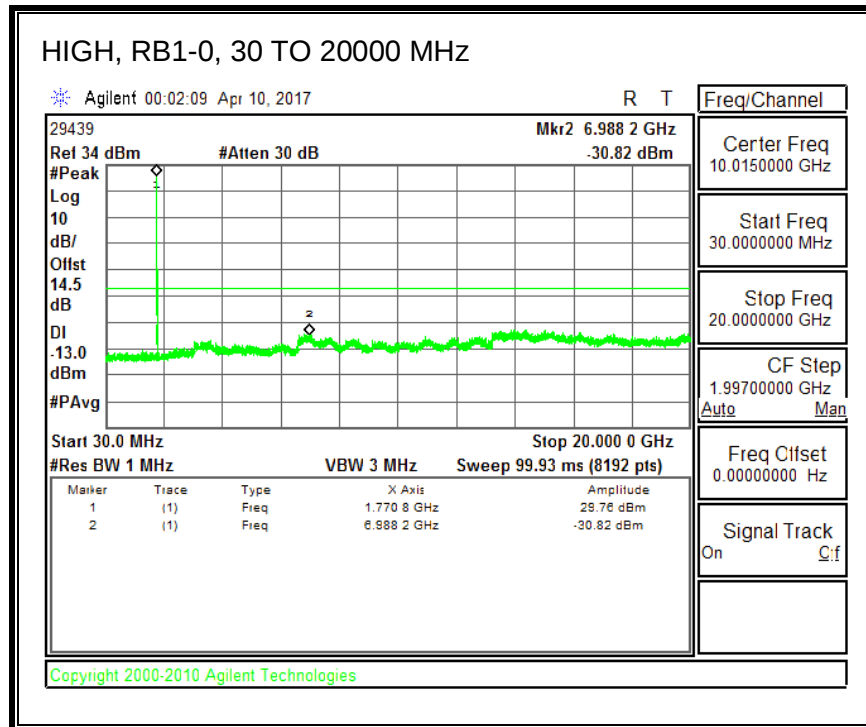



16QAM, (10.0 MHz BAND WIDTH)

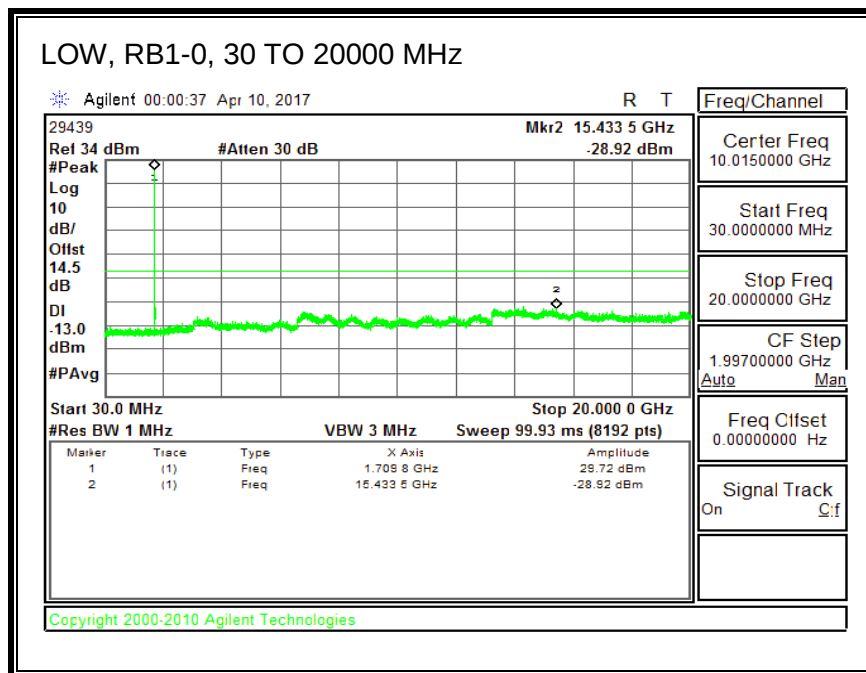

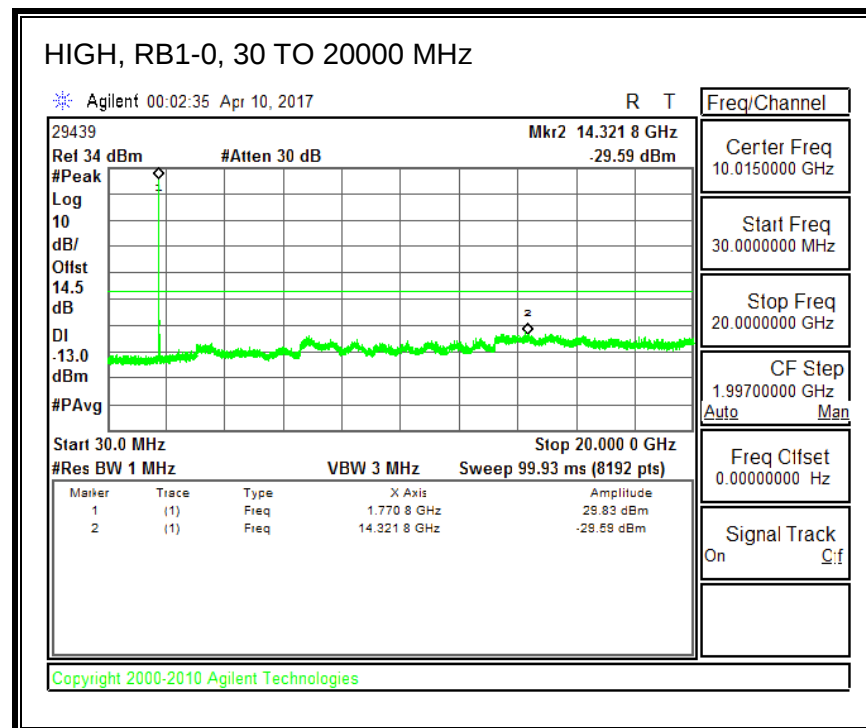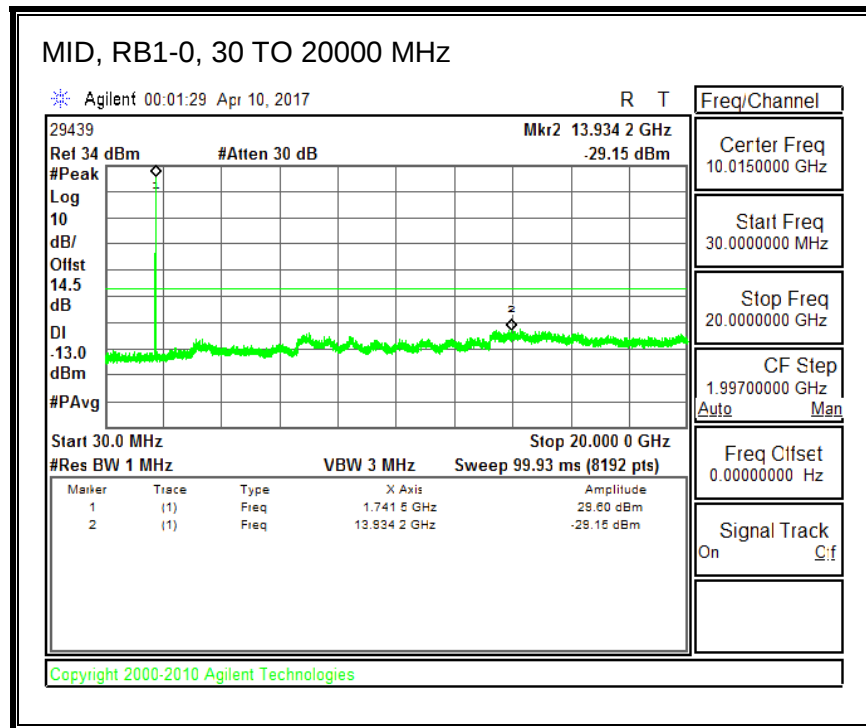




QPSK, (15.0 MHz BAND WIDTH)

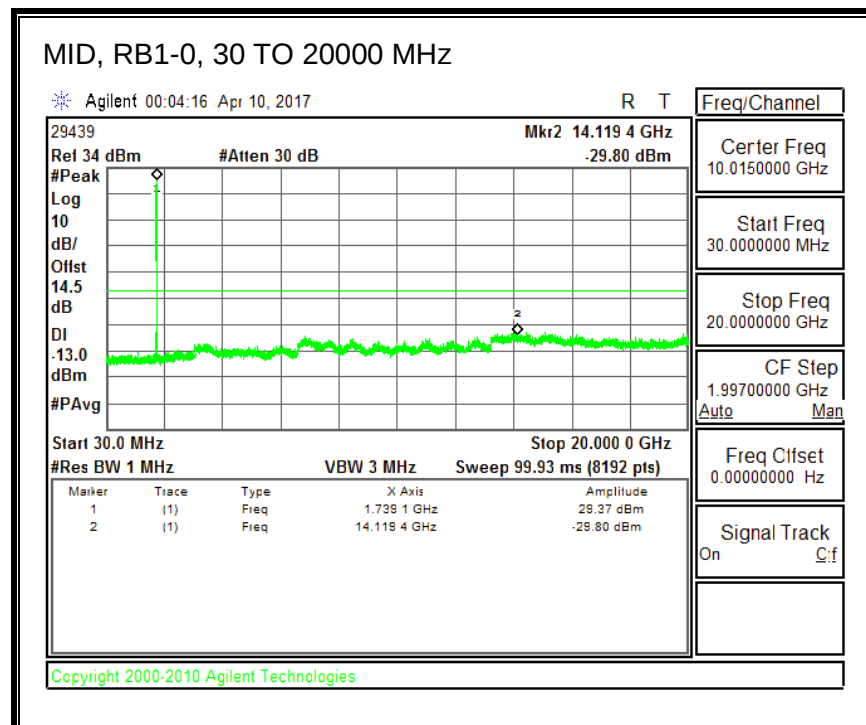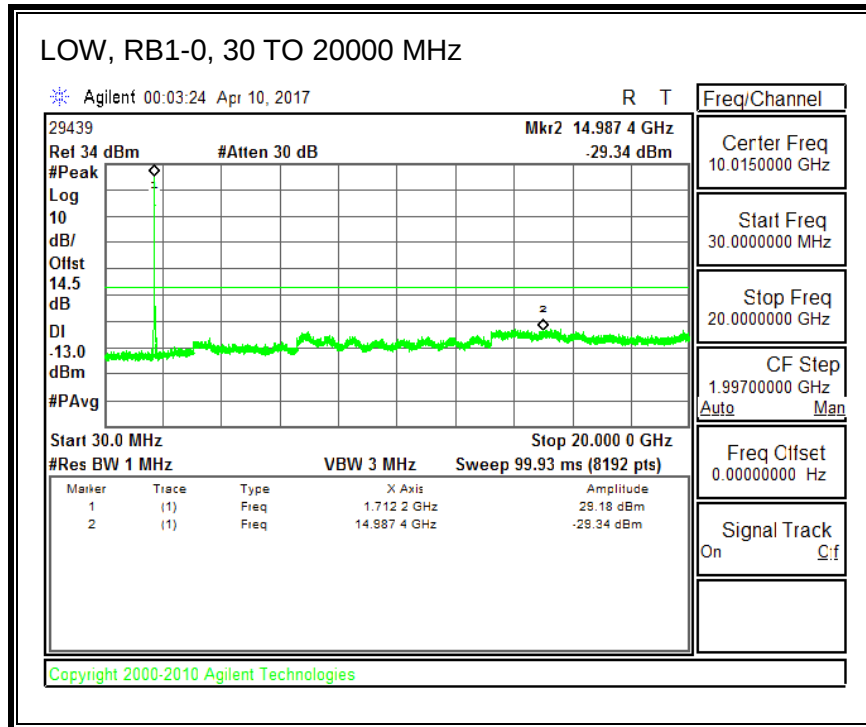


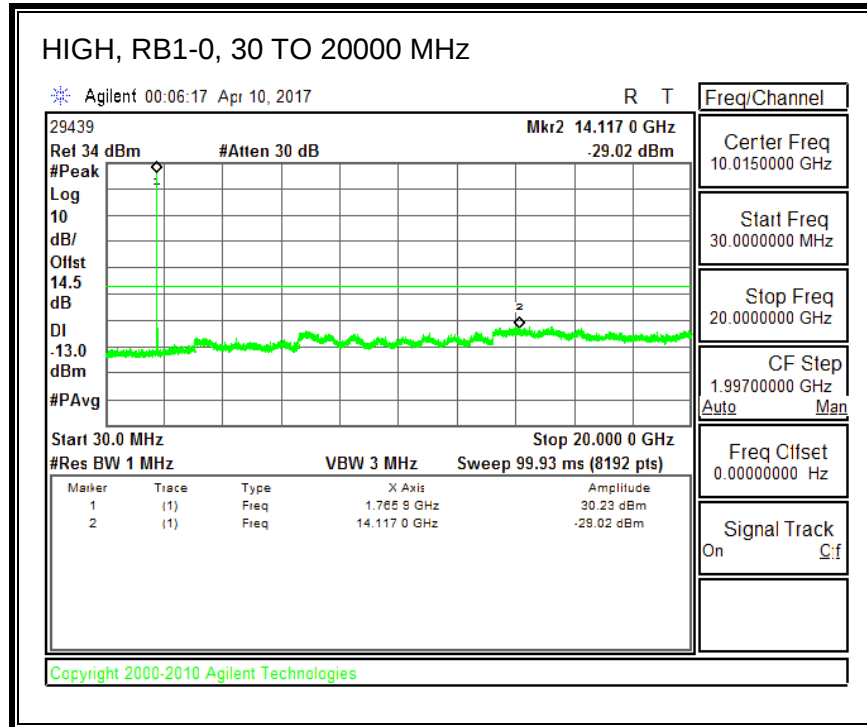



16QAM, (15.0 MHz BAND WIDTH)

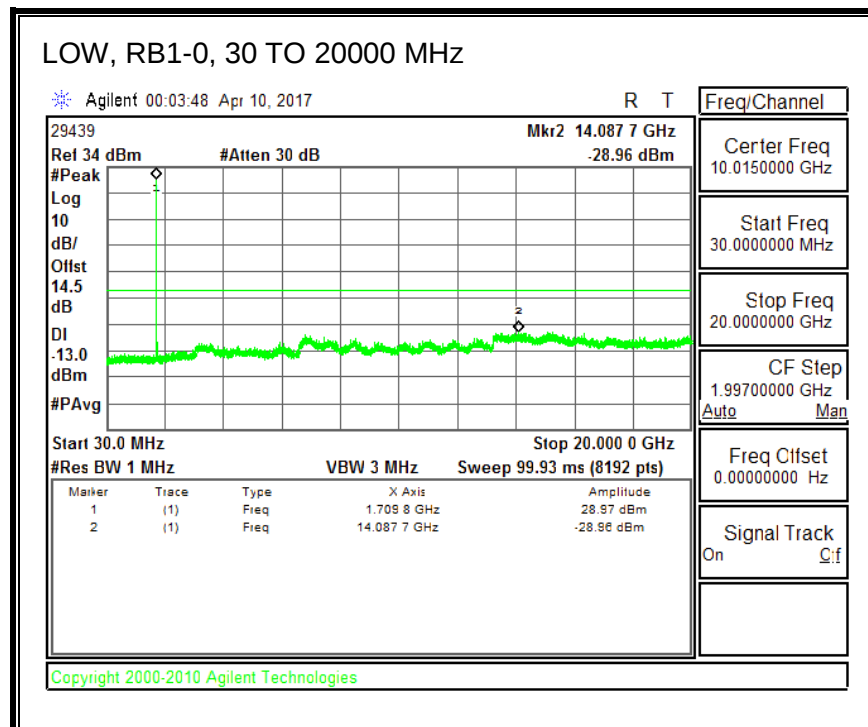

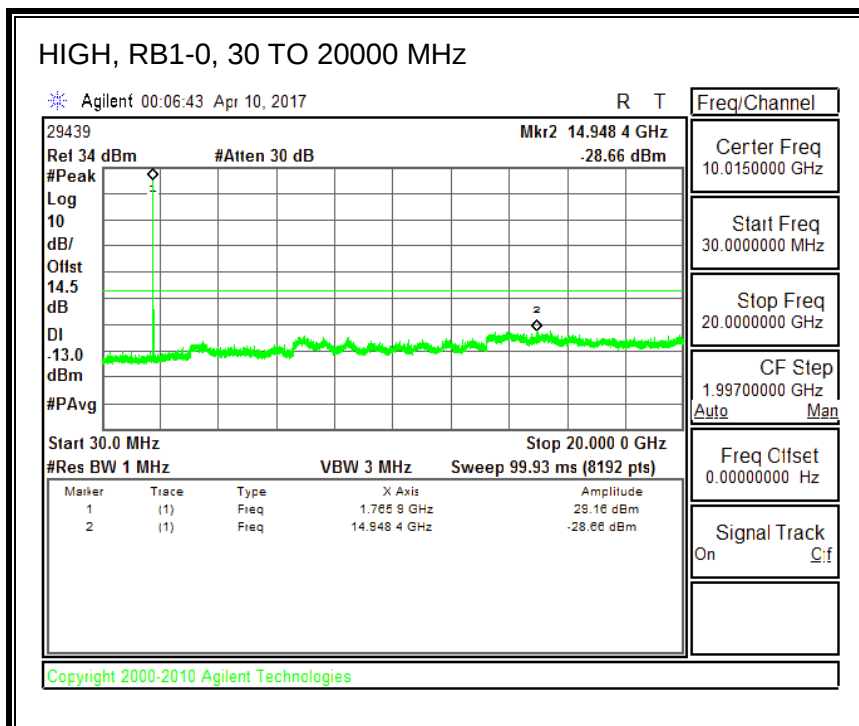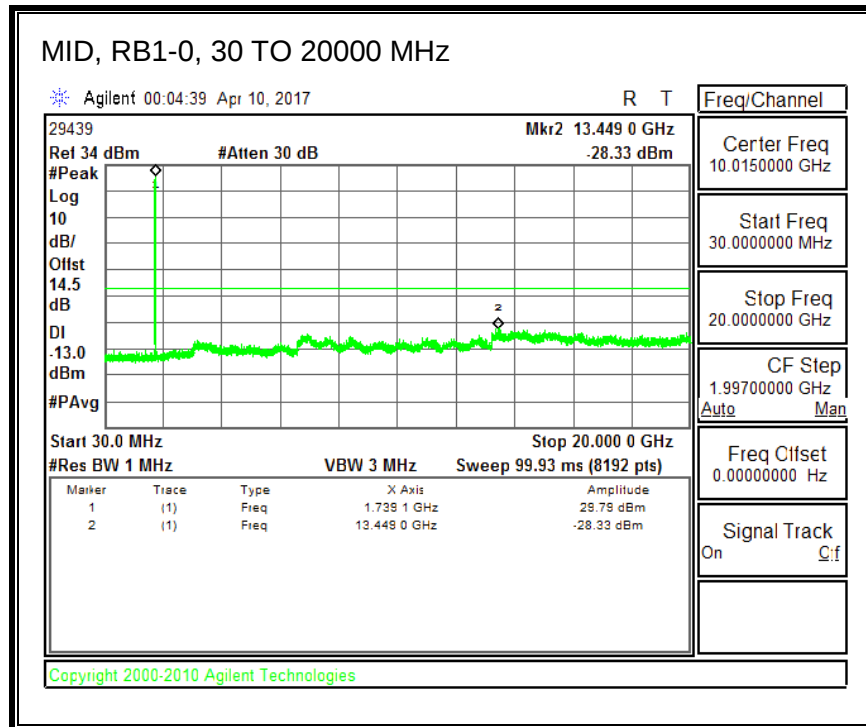




QPSK, (20.0 MHz BAND WIDTH)

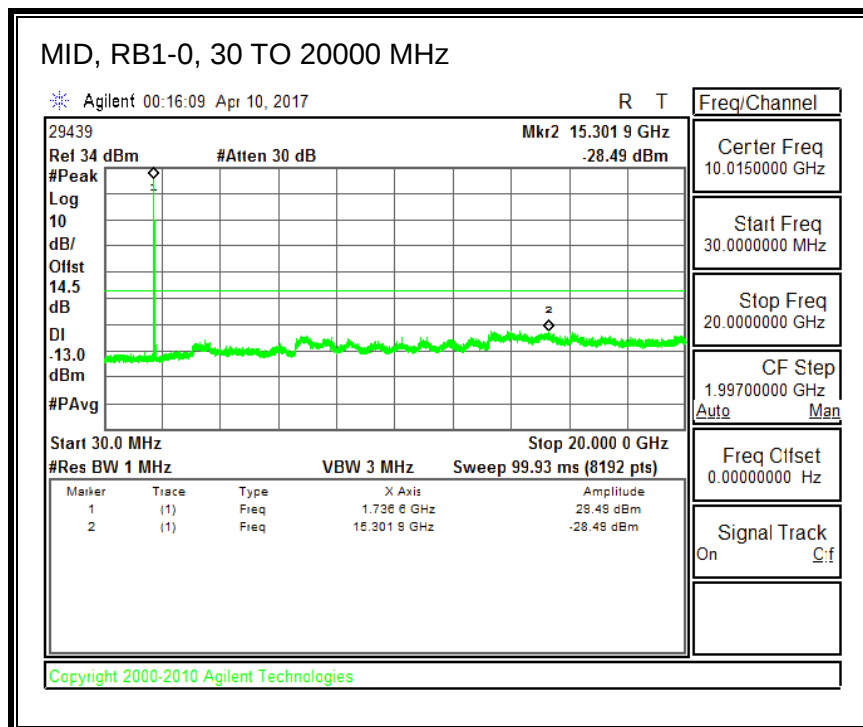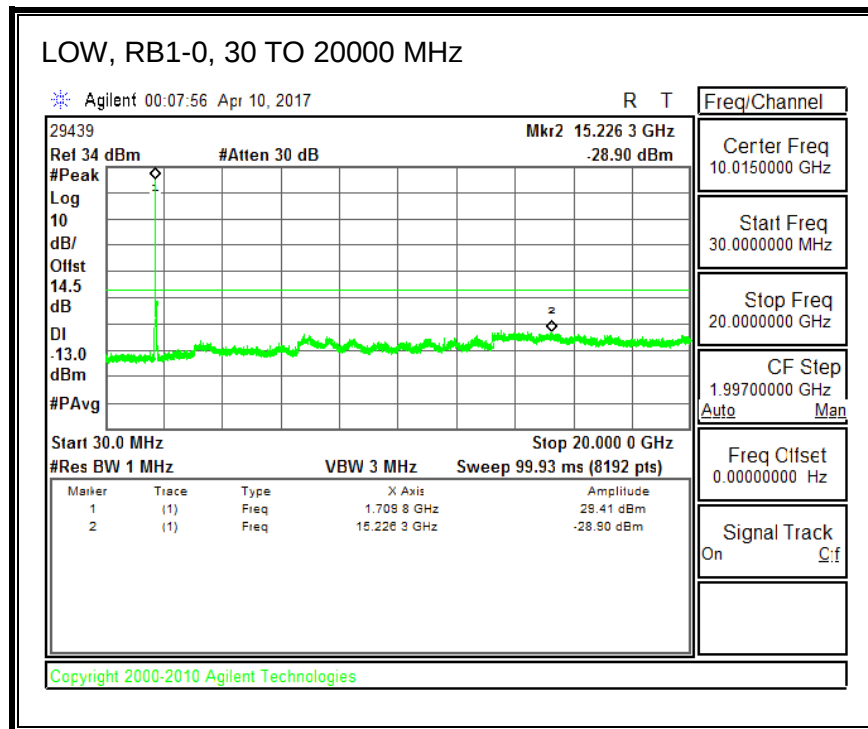

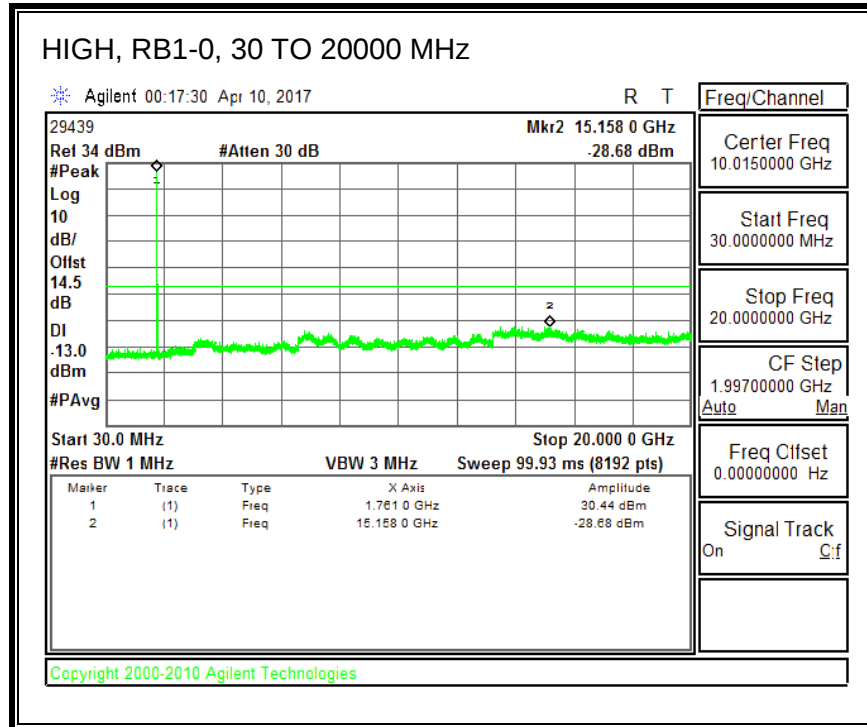

16QAM, (20.0 MHz BAND WIDTH)

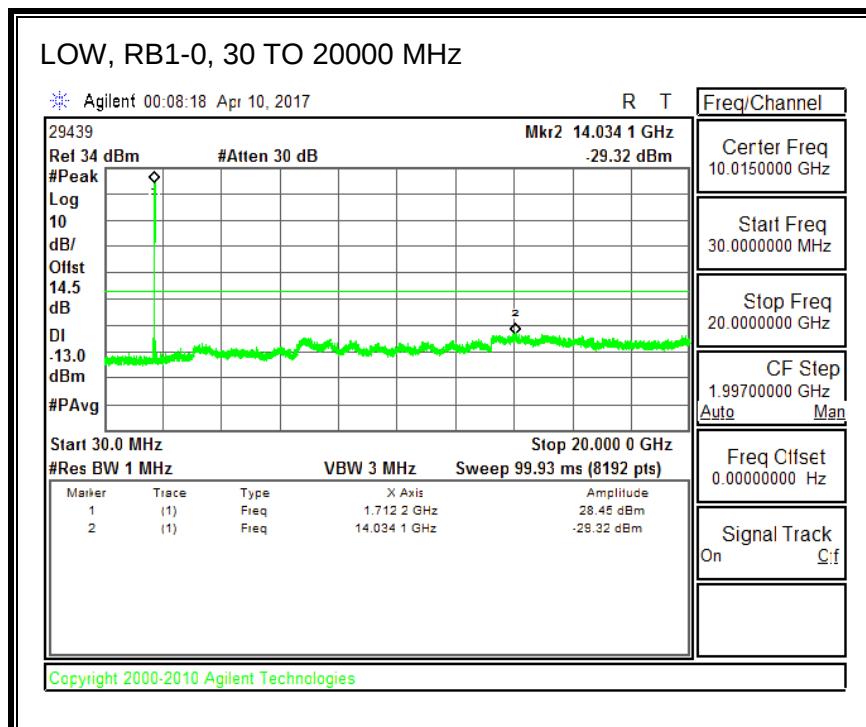

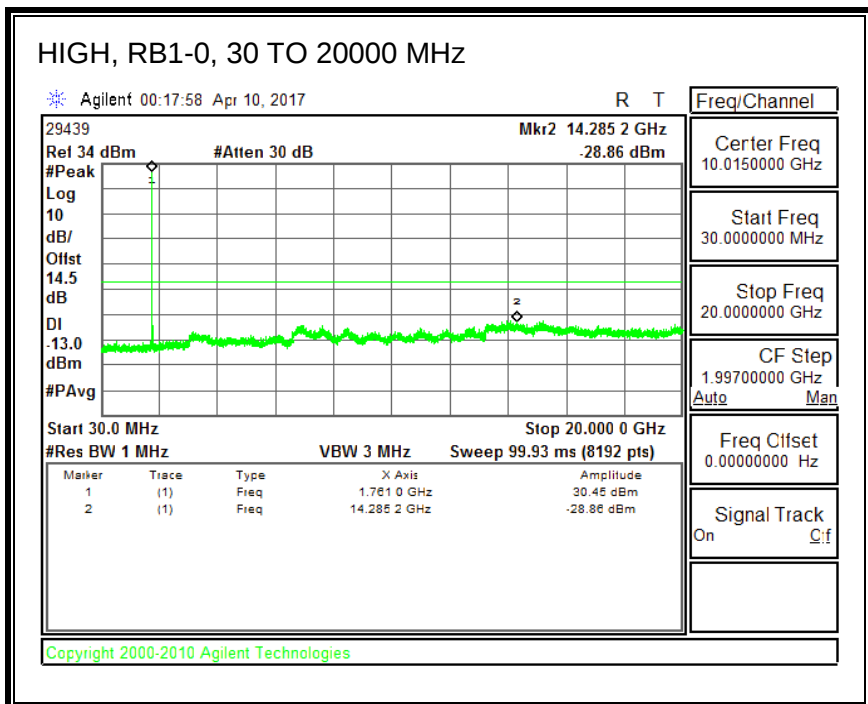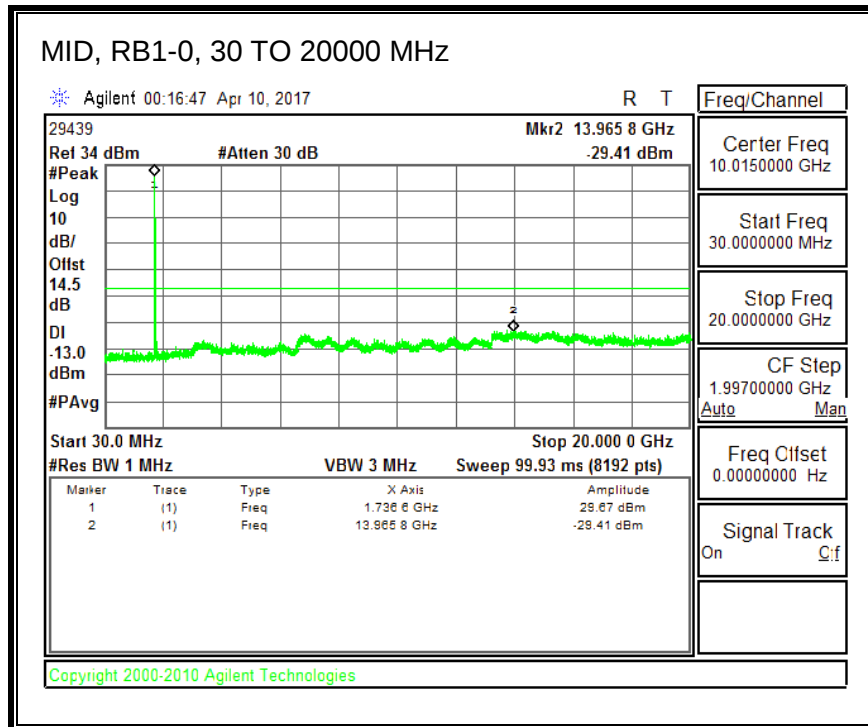

8.3. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213

LIMITS

FCC: §22.355

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC: §24.235 & §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC: §90.213

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to +50°C
- Voltage = (85% - 115%)
Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.
End Voltage, 3.2VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 17
- LTE Band 25
- LTE Band 26
- LTE Band 30
- LTE Band 41
- LTE Band 66

RESULTS

See the following pages.

8.3.1. LTE BAND 2

ID:	38602	Date:	4/3/17
------------	-------	--------------	--------

QPSK, (20MHz BANDWIDTH)

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1851.0663	1908.9422		
Extreme (50C)		1851.0663	1908.9422	7.3	0.004
Extreme (40C)		1851.0663	1908.9422	7.5	0.004
Extreme (30C)		1851.0663	1908.9422	7.7	0.004
Extreme (10C)		1851.0663	1908.9422	8.0	0.004
Extreme (0C)		1851.0663	1908.9422	8.2	0.004
Extreme (-10C)		1851.0663	1908.9422	8.7	0.005
Extreme (-20C)		1851.0663	1908.9422	8.4	0.004
Extreme (-30C)		1851.0663	1908.9422	8.8	0.005
20C	15%	1851.0663	1908.9422	8.8	0.005
	-15%	1851.0663	1908.9422	7.0	0.004
	End Point	1851.0663	1908.9422	7.8	0.004

8.3.2. LTE BAND 4

ID:	38602	Date:	4/3/17
------------	-------	--------------	--------

QPSK, (3.0MHz BANDWIDTH)

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1710.1095	1754.8946		
Extreme (50C)		1710.1095	1754.8946	6.5	0.004
Extreme (40C)		1710.1095	1754.8946	6.1	0.004
Extreme (30C)		1710.1095	1754.8946	5.8	0.003
Extreme (10C)		1710.1095	1754.8946	7.1	0.004
Extreme (0C)		1710.1095	1754.8946	6.3	0.004
Extreme (-10C)		1710.1095	1754.8946	6.9	0.004
Extreme (-20C)		1710.1095	1754.8946	6.9	0.004
Extreme (-30C)		1710.1095	1754.8946	7.2	0.004
20C	15%	1710.1095	1754.8946	7.3	0.004
	-15%	1710.1095	1754.8946	7.0	0.004
	End Point	1710.1095	1754.8946	7.1	0.004

8.3.3. LTE BAND 5

ID:	38602	Date:	4/3/17
------------	-------	--------------	--------

QPSK, (10MHz BANDWIDTH)

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	824.5298	848.4611		
Extreme (50C)		824.5298	848.4611	-3.2	-0.004
Extreme (40C)		824.5298	848.4611	-2.1	-0.003
Extreme (30C)		824.5298	848.4611	-1.8	-0.002
Extreme (10C)		824.5298	848.4611	-1.8	-0.002
Extreme (0C)		824.5298	848.4611	-2.4	-0.003
Extreme (-10C)		824.5298	848.4611	-1.6	-0.002
Extreme (-20C)		824.5298	848.4611	-1.9	-0.002
Extreme (-30C)		824.5298	848.4611	-2.3	-0.003
20C	15%	824.5298	848.4611	-3.2	-0.004
	-15%	824.5298	848.4611	-2.4	-0.003
	End Point	824.5298	848.4611	-3.3	-0.004

8.3.4. LTE BAND 7

ID:	38602	Date:	4/3/17
------------	-------	--------------	--------

QPSK, (20MHz BANDWIDTH)

Limit		2500	2570	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2501.0365	2568.9281		
Extreme (50C)		2501.0365	2568.9281	1.3	0.001
Extreme (40C)		2501.0365	2568.9281	-2.8	-0.001
Extreme (30C)		2501.0365	2568.9281	-4.5	-0.002
Extreme (10C)		2501.0365	2568.9281	-1.4	-0.001
Extreme (0C)		2501.0365	2568.9281	1.8	0.001
Extreme (-10C)		2501.0365	2568.9281	1.7	0.001
Extreme (-20C)		2501.0365	2568.9281	2.1	0.001
Extreme (-30C)		2501.0365	2568.9281	1.5	0.001
20C	15%	2501.0365	2568.9281	1.2	0.000
	-15%	2501.0365	2568.9281	1.8	0.001
	End Point	2501.0365	2568.9281	-1.2	0.000

8.3.5. LTE BAND 12

ID:	31300	Date:	4/3/17
------------	-------	--------------	--------

QPSK, (10MHz BANDWIDTH)

Limit		699	716	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	699.5305	715.4700		
Extreme (50C)		699.5305	715.4700	-3.3	0.00
Extreme (40C)		699.5305	715.4700	-6.3	-0.01
Extreme (30C)		699.5305	715.4700	-6.9	-0.01
Extreme (10C)		699.5305	715.4700	-7.4	-0.01
Extreme (0C)		699.5305	715.4700	-2.4	0.00
Extreme (-10C)		699.5305	715.4700	-1.7	0.00
Extreme (-20C)		699.5305	715.4700	-2.2	0.00
Extreme (-30C)		699.5305	715.4700	-3.3	0.00
20C	15%	699.5305	715.4700	-1.9	0.00
	-15%	699.5305	715.4700	-2.5	0.00
	End Point	699.5305	715.4700	-3.2	0.00

8.3.6. LTE BAND 13

ID:	8602	Date:	4/4/17
------------	------	--------------	--------

QPSK, (10MHz BANDWIDTH)

Limit		777	787	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	777.5259	786.4701		
Extreme (50C)		777.5259	786.4701	-1.7	-0.002
Extreme (40C)		777.5259	786.4701	-8.4	-0.011
Extreme (30C)		777.5259	786.4701	8.3	0.011
Extreme (10C)		777.5259	786.4701	-5.4	-0.007
Extreme (0C)		777.5259	786.4701	-3.2	-0.004
Extreme (-10C)		777.5259	786.4701	-2.3	-0.003
Extreme (-20C)		777.5259	786.4701	-2.4	-0.003
Extreme (-30C)		777.5259	786.4701	-4.2	-0.005
20C	15%	777.5259	786.4701	-2.7	-0.003
	-15%	777.5259	786.4701	-1.7	-0.002
	End Point	777.5259	786.4701	-2.4	-0.003

8.3.7. LTE BAND 17

ID:	38602	Date:	4/4/17
------------	-------	--------------	--------

QPSK, (10MHz BANDWIDTH)

Limit		704	716	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	704.5248	715.4703		
Extreme (50C)		704.5248	715.4703	3.2	0.005
Extreme (40C)		704.5248	715.4703	6.9	0.010
Extreme (30C)		704.5248	715.4703	6.4	0.009
Extreme (10C)		704.5248	715.4703	6.1	0.009
Extreme (0C)		704.5248	715.4703	5.0	0.007
Extreme (-10C)		704.5248	715.4703	3.9	0.005
Extreme (-20C)		704.5248	715.4703	5.4	0.008
Extreme (-30C)		704.5248	715.4703	4.9	0.007
20C	15%	704.5248	715.4703	2.9	0.004
	-15%	704.5248	715.4703	4.1	0.006
	End Point	704.5248	715.4703	3.6	0.005

8.3.8. LTE BAND 25

ID:	38602	Date:	4/3/17
------------	-------	--------------	--------

QPSK, (20MHz BANDWIDTH)

Limit		1850	1915	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1851.0686	1913.9217		
Extreme (50C)		1851.0686	1913.9217	-4.7	-0.002
Extreme (40C)		1851.0686	1913.9217	-4.5	-0.002
Extreme (30C)		1851.0686	1913.9217	-4.2	-0.002
Extreme (10C)		1851.0686	1913.9217	-3.9	-0.002
Extreme (0C)		1851.0686	1913.9217	-3.1	-0.002
Extreme (-10C)		1851.0686	1913.9217	-5.8	-0.003
Extreme (-20C)		1851.0686	1913.9217	-3.5	-0.002
Extreme (-30C)		1851.0686	1913.9217	-5.1	-0.003
20C	15%	1851.0686	1913.9217	-4.0	-0.002
	-15%	1851.0686	1913.9217	-4.3	-0.002
	End Point	1851.0686	1913.9217	-4.2	-0.002

8.3.9. LTE BAND 26

ID:	38602	Date:	4/4/17
------------	-------	--------------	--------

QPSK, (10MHz BANDWIDTH)

Limit		814	824	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	814.3000	823.7030		
Extreme (50C)		814.3000	823.7030	1.9	0.002
Extreme (40C)		814.3000	823.7030	6.0	0.007
Extreme (30C)		814.3000	823.7030	6.9	0.008
Extreme (10C)		814.3000	823.7030	8.8	0.011
Extreme (0C)		814.3000	823.7030	3.1	0.004
Extreme (-10C)		814.3000	823.7030	2.8	0.003
Extreme (-20C)		814.3000	823.7030	3.2	0.004
Extreme (-30C)		814.3000	823.7030	3.0	0.004
20C	15%	814.3000	823.7030	2.4	0.003
	-15%	814.3000	823.7030	3.2	0.004
	End Point	814.3000	823.7030	1.2	0.001

8.3.10. LTE BAND 30

ID:	38602	Date:	4/4/17
------------	-------	--------------	--------

QPSK, (10MHz BANDWIDTH)

Limit		2305	2315	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2305.3030	2314.6790		
Extreme (50C)		2305.3030	2314.6790	2.6	0.001
Extreme (40C)		2305.3030	2314.6790	3.5	0.002
Extreme (30C)		2305.3030	2314.6790	3.7	0.002
Extreme (10C)		2305.3030	2314.6790	3.5	0.002
Extreme (0C)		2305.3030	2314.6790	3.2	0.001
Extreme (-10C)		2305.3030	2314.6790	4.7	0.002
Extreme (-20C)		2305.3030	2314.6790	2.2	0.001
Extreme (-30C)		2305.3030	2314.6790	3.8	0.002
20C	15%	2305.3030	2314.6790	-1.8	-0.001
	-15%	2305.3030	2314.6790	1.7	0.001
	End Point	2305.3030	2314.6790	1.9	0.001

8.3.11. LTE BAND 41

ID:	38602	Date:	4/4/17
------------	-------	--------------	--------

QPSK, (20MHz BANDWIDTH)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2496.8530	2689.1630		
Extreme (50C)		2496.8530	2689.1630	-1.8	-0.001
Extreme (40C)		2496.8530	2689.1630	-2.0	-0.001
Extreme (30C)		2496.8530	2689.1630	-1.9	-0.001
Extreme (10C)		2496.8530	2689.1630	-1.7	-0.001
Extreme (0C)		2496.8530	2689.1630	-0.9	0.000
Extreme (-10C)		2496.8530	2689.1630	1.4	0.001
Extreme (-20C)		2496.8530	2689.1630	-2.9	-0.001
Extreme (-30C)		2496.8530	2689.1630	1.2	0.000
20C	15%	2496.8530	2689.1630	-3.3	-0.001
	-15%	2496.8530	2689.1630	-2.8	-0.001
	End Point	2496.8530	2689.1630	-3.4	-0.001

8.3.12. LTE BAND 66

ID:	50822	Date:	4/7/17
------------	-------	--------------	--------

QPSK, (20MHz BANDWIDTH)

Limit		1710	1780	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1711.0111	1779.0110		
Extreme (50C)		1711.0111	1779.0110	1.9	0.001
Extreme (40C)		1711.0111	1779.0110	1.2	0.001
Extreme (30C)		1711.0111	1779.0110	-0.5	0.000
Extreme (10C)		1711.0111	1779.0110	0.7	0.000
Extreme (0C)		1711.0111	1779.0110	1.8	0.001
Extreme (-10C)		1711.0111	1779.0110	1.2	0.001
Extreme (-20C)		1711.0111	1779.0110	-0.8	0.000
Extreme (-30C)		1711.0111	1779.0110	1.9	0.001
20C	15%	1711.0111	1779.0110	1.1	0.001
	-15%	1711.0111	1779.0110	1.3	0.001
	End Point	1711.0111	1779.0110	1.6	0.001

8.4. PEAK-TO-AVERAGE RATIO


In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

RESULT


Test was performed on LAT 1 antenna; full resource block (FRB) for each bandwidth was used to measure as the worst case. The results from all CCDF measurements are passed with 13dB peak-to-average ratio criteria.

8.4.1. LTE BAND 2


QPSK, (1.4 MHz BAND WIDTH)

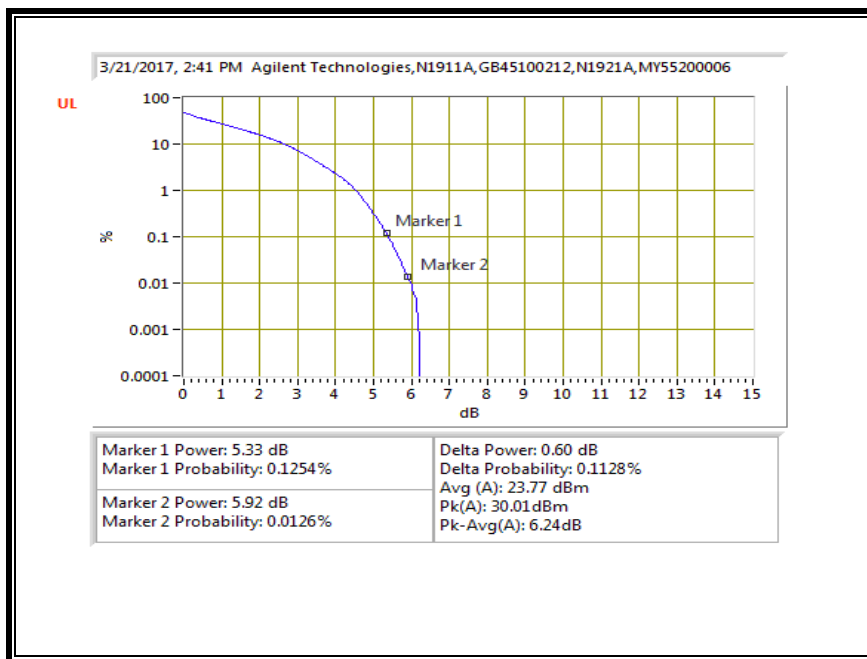


16QAM, (1.4 MHz BAND WIDTH)

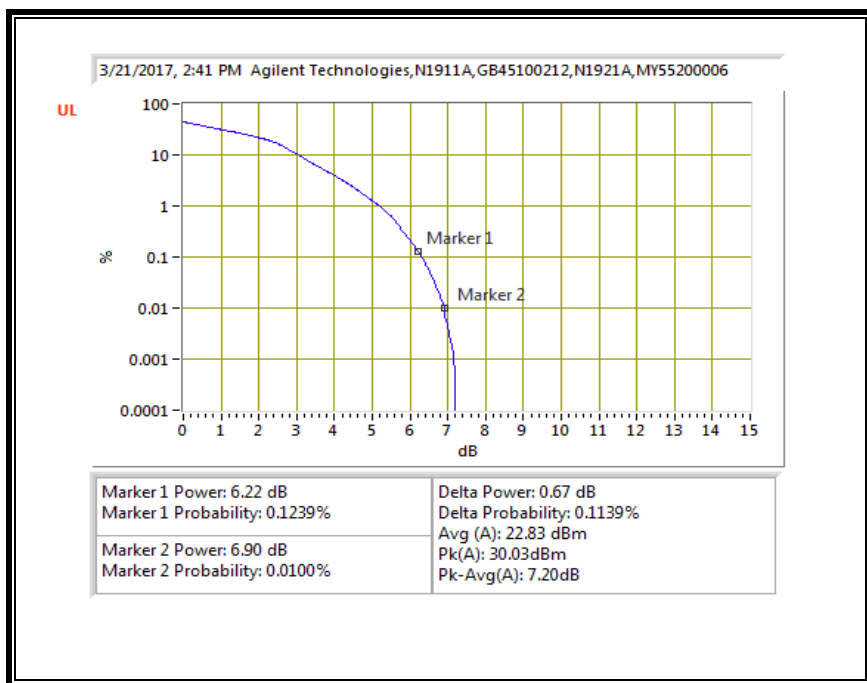


QPSK, (3.0 MHz BAND WIDTH)

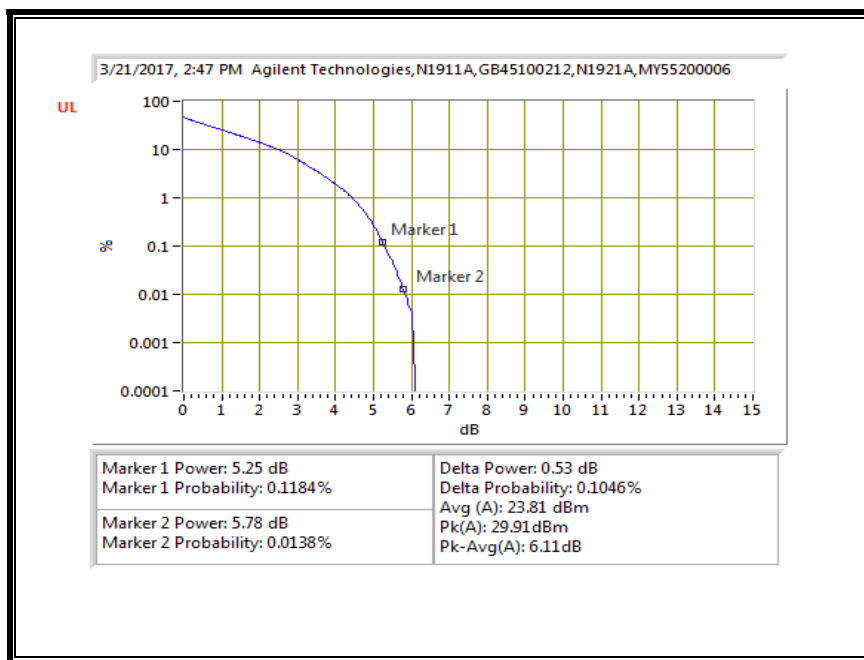


16QAM, (3.0 MHz BAND WIDTH)

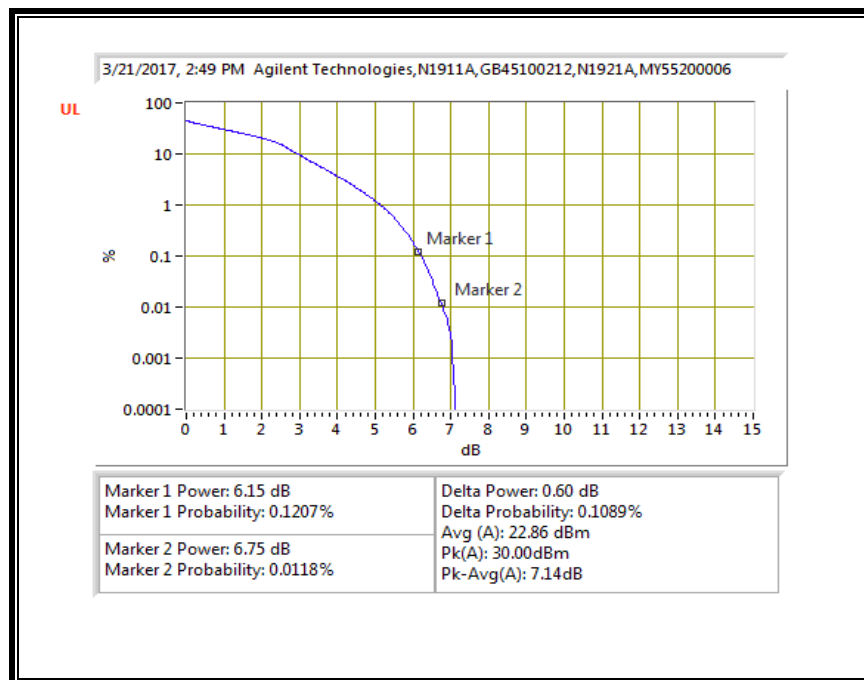


QPSK, (5.0 MHz BAND WIDTH)

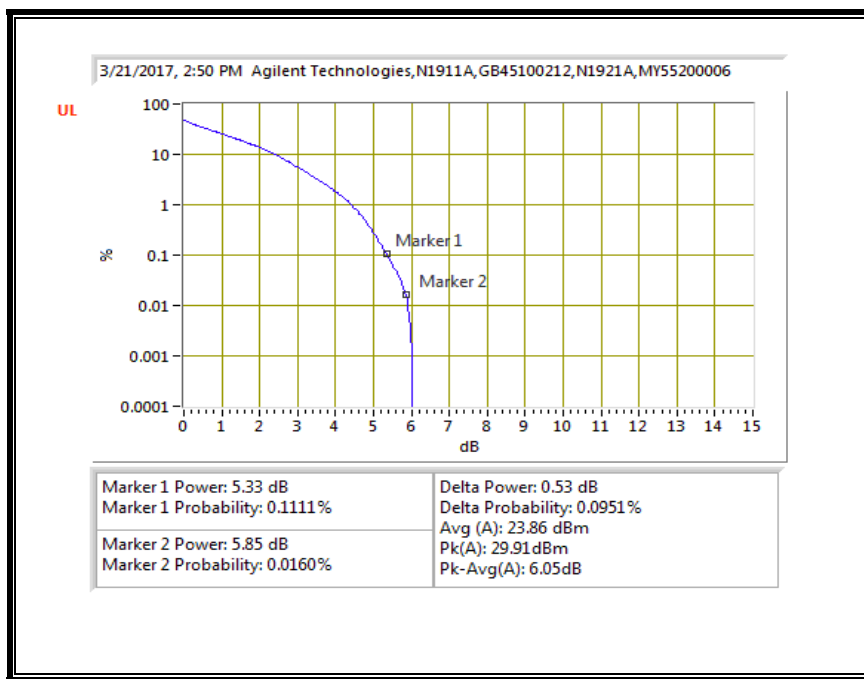


16QAM, (5.0 MHz BAND WIDTH)

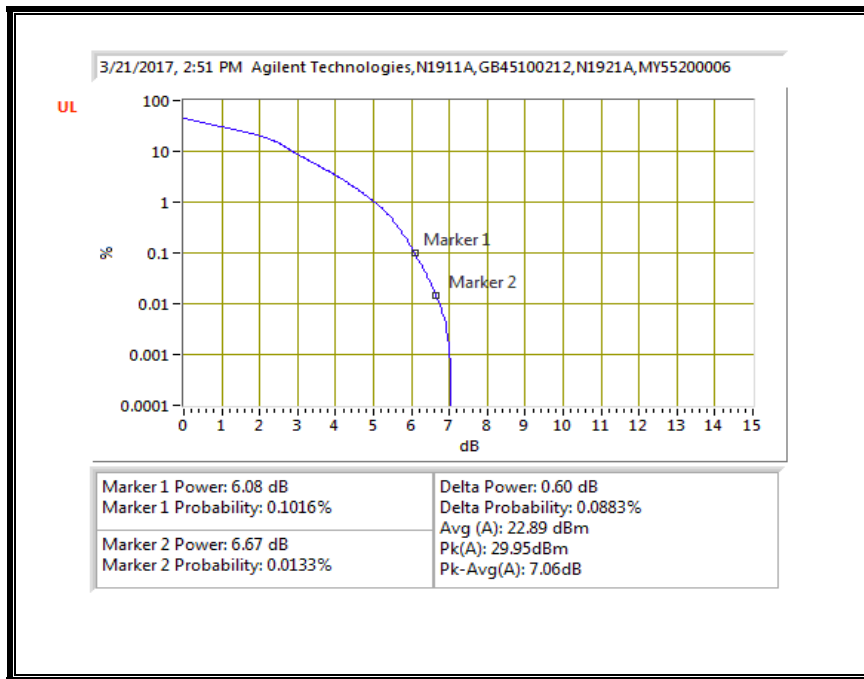


QPSK, (10.0 MHz BAND WIDTH)

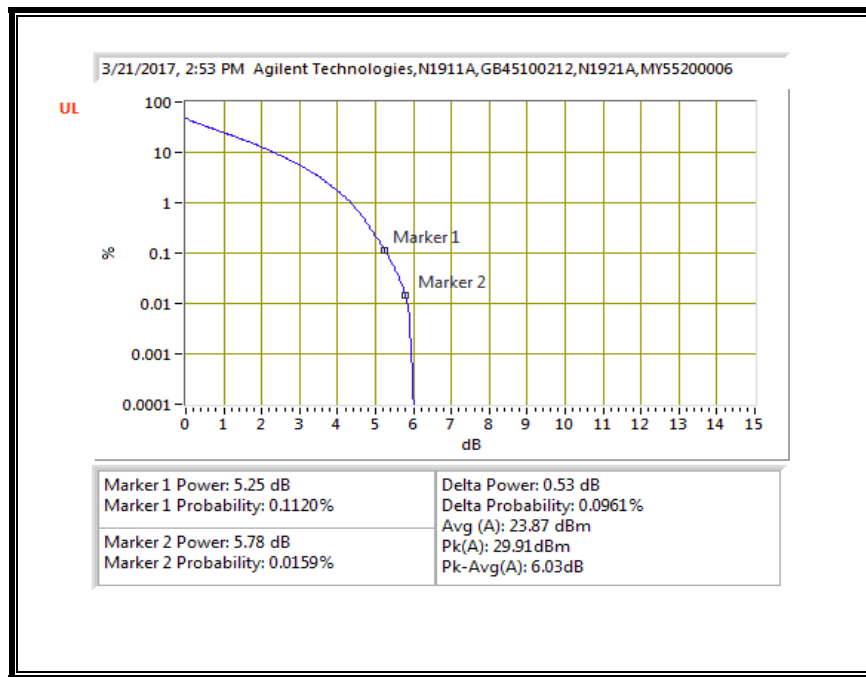


16QAM, (10.0 MHz BAND WIDTH)

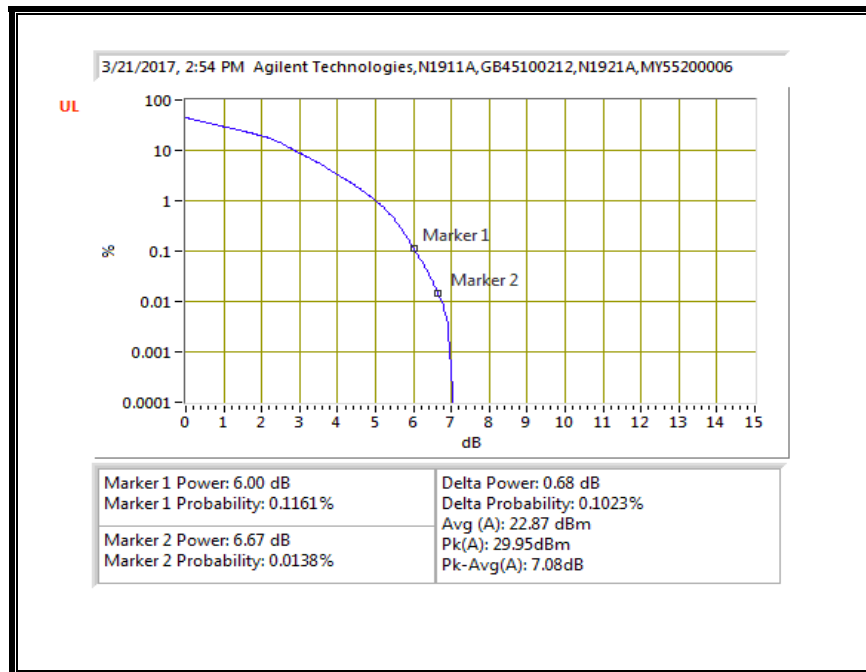


QPSK, (15.0 MHz BAND WIDTH)

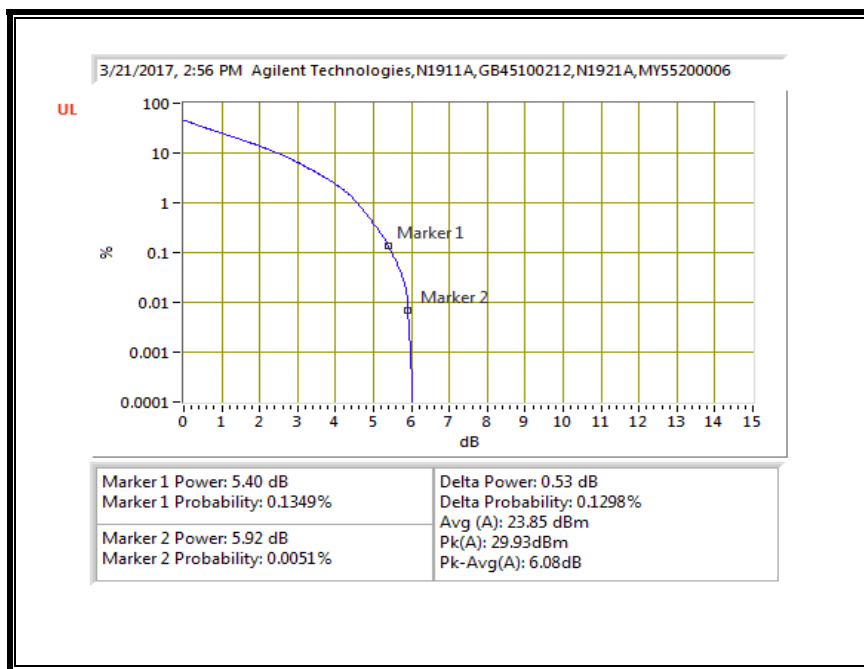


16QAM, (15.0 MHz BAND WIDTH)

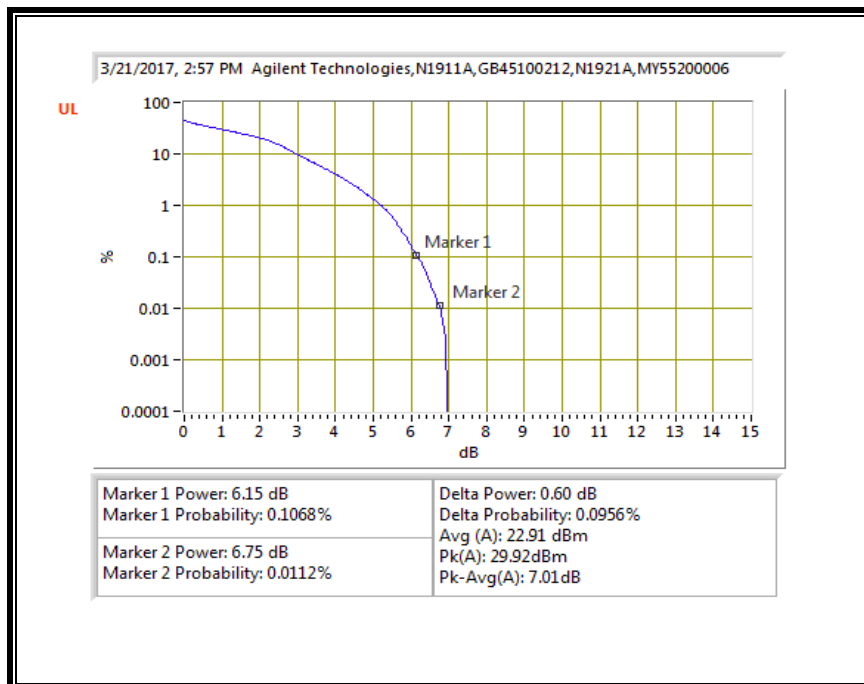

QPSK, (20.0 MHz BAND WIDTH)

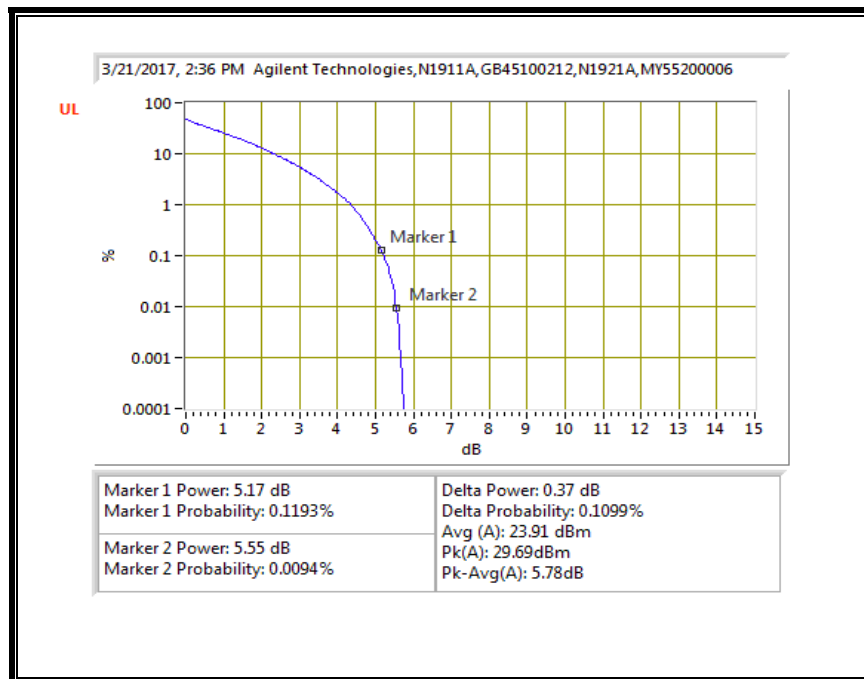


16QAM, (20.0 MHz BAND WIDTH)

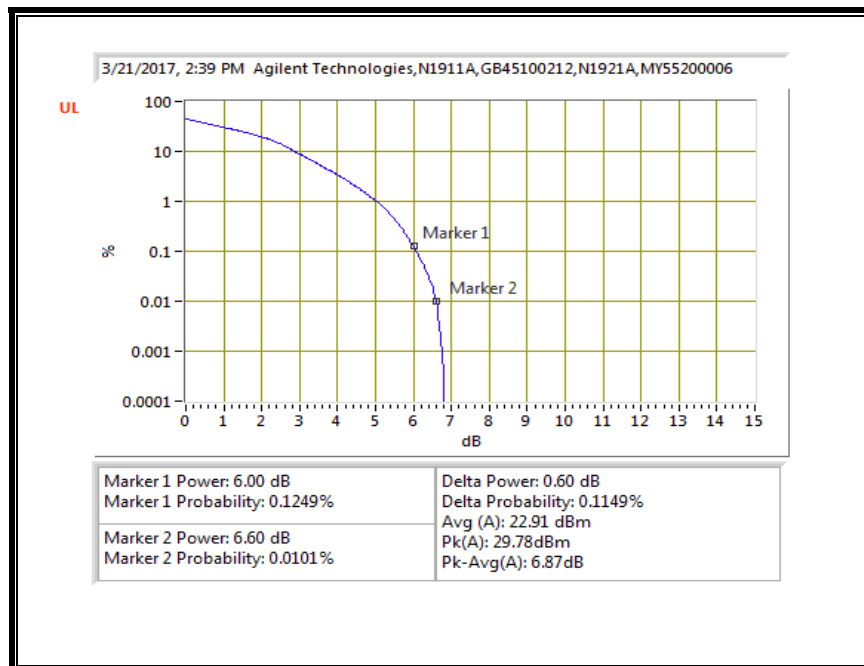


8.4.2. LTE BAND 4


QPSK, (1.4 MHz BAND WIDTH)

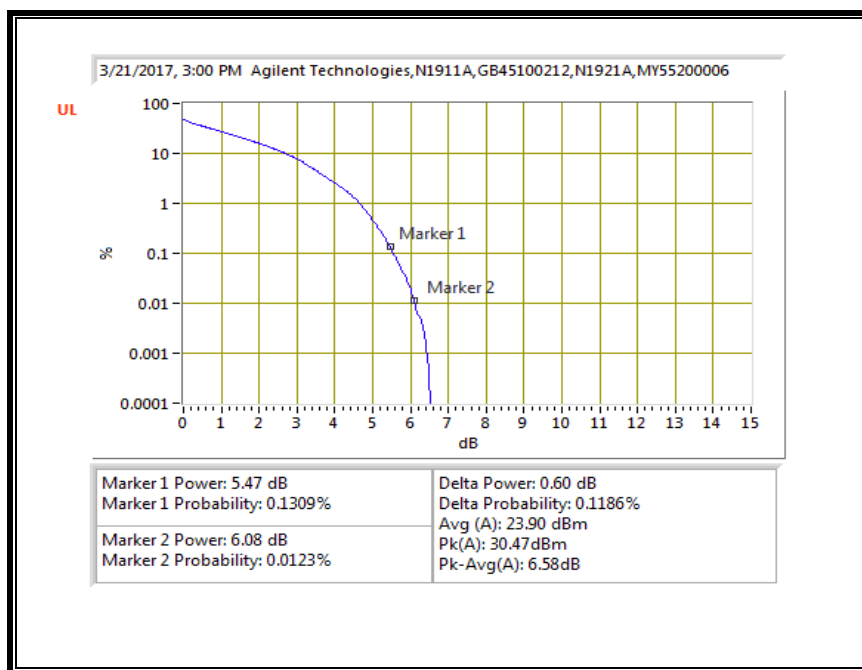


16QAM, (1.4 MHz BAND WIDTH)

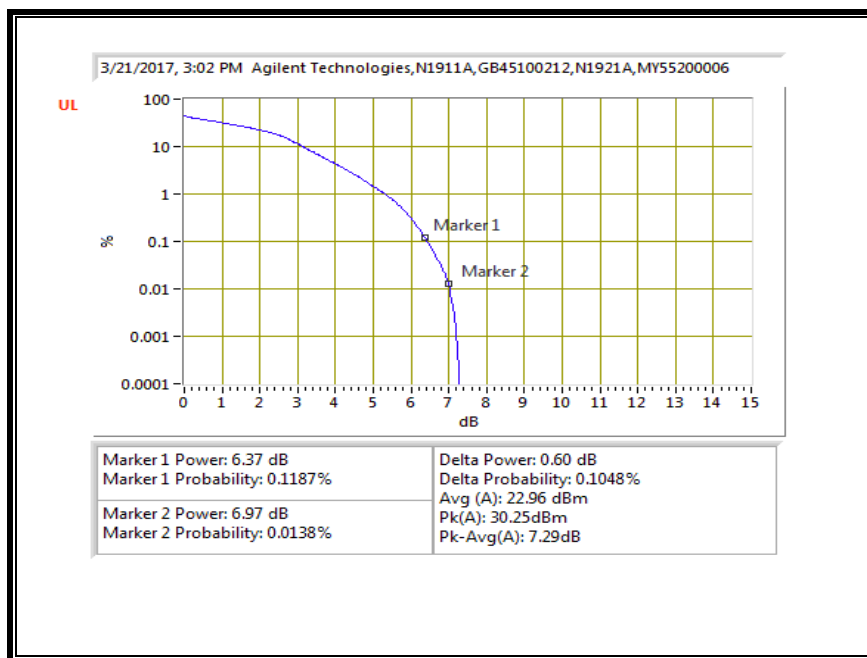

QPSK, (3.0 MHz BAND WIDTH)

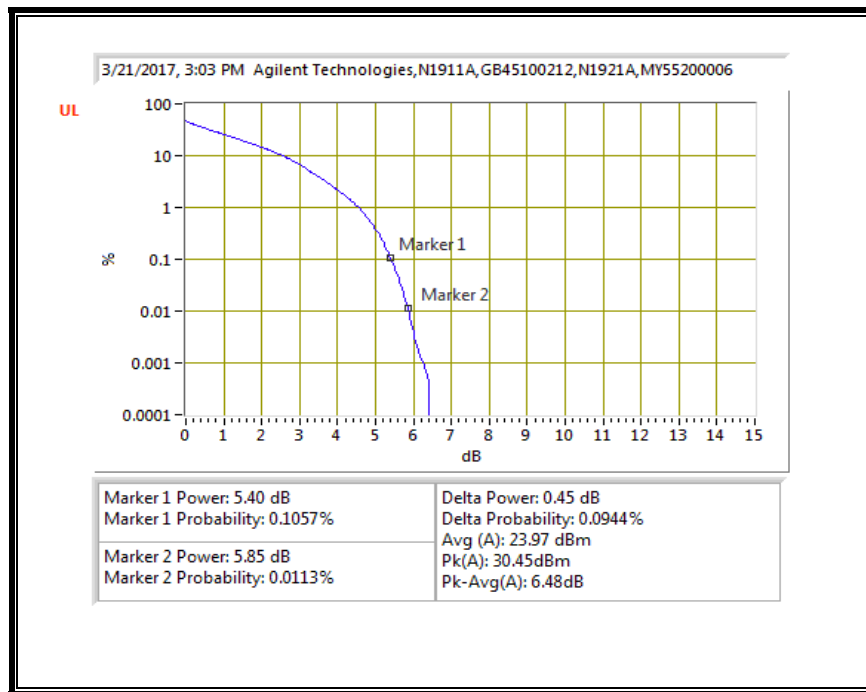


16QAM, (3.0 MHz BAND WIDTH)

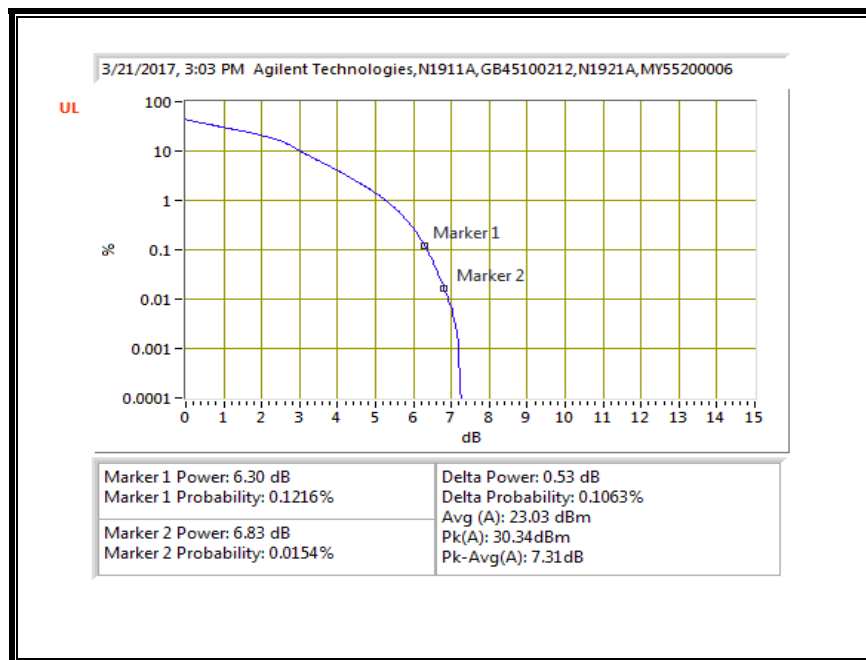


8.4.3. LTE BAND 5


QPSK, (1.4 MHz BAND WIDTH)

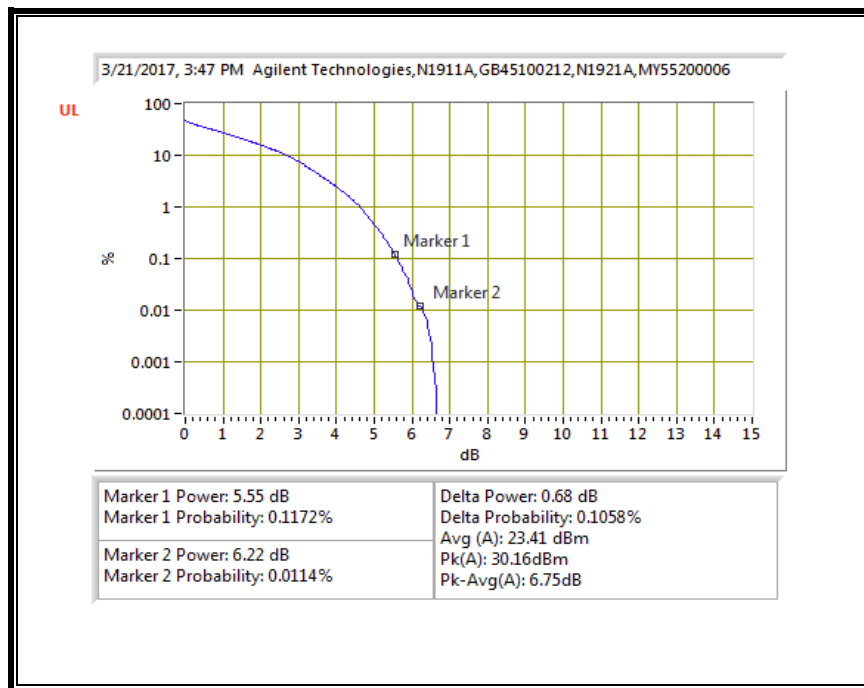


16QAM, (1.4 MHz BAND WIDTH)

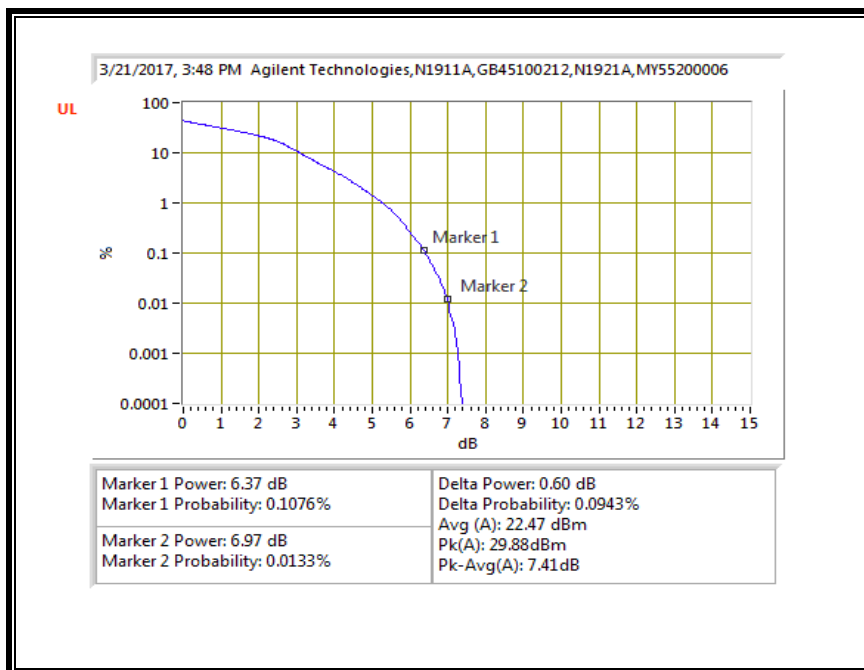


QPSK, (3.0 MHz BAND WIDTH)

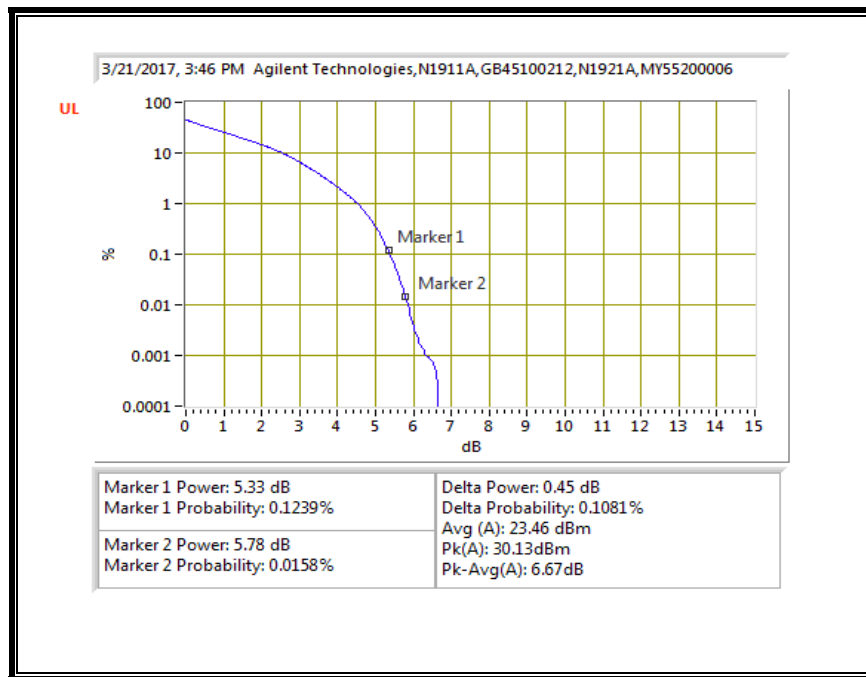


16QAM, (3.0 MHz BAND WIDTH)

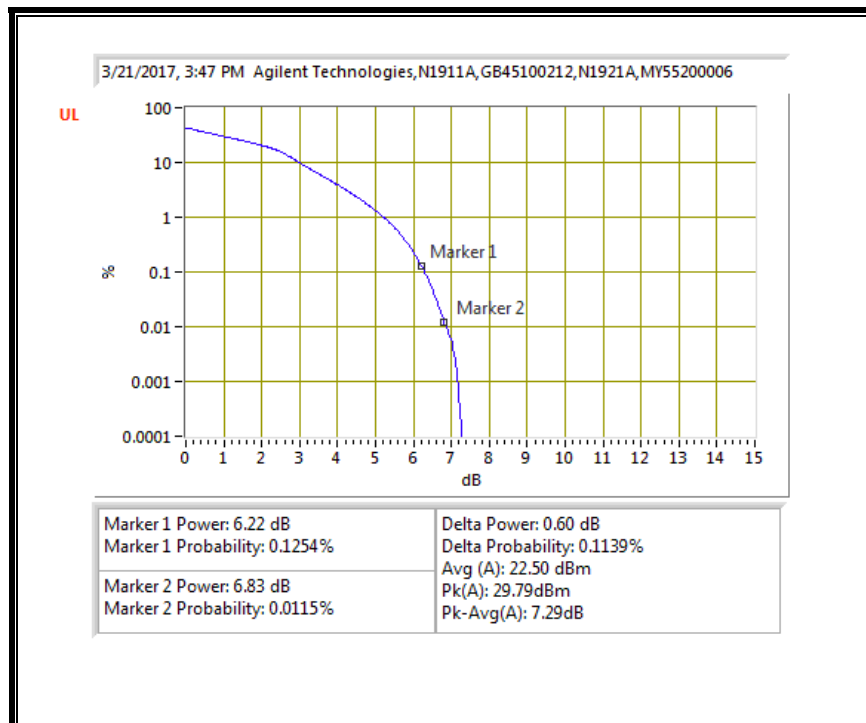


QPSK, (5.0 MHz BAND WIDTH)

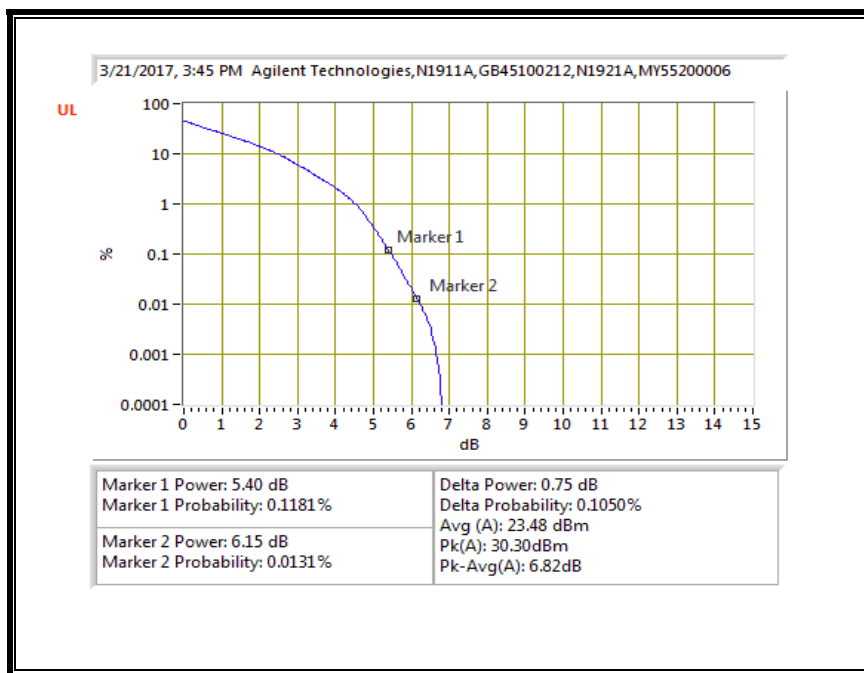


16QAM, (5.0 MHz BAND WIDTH)

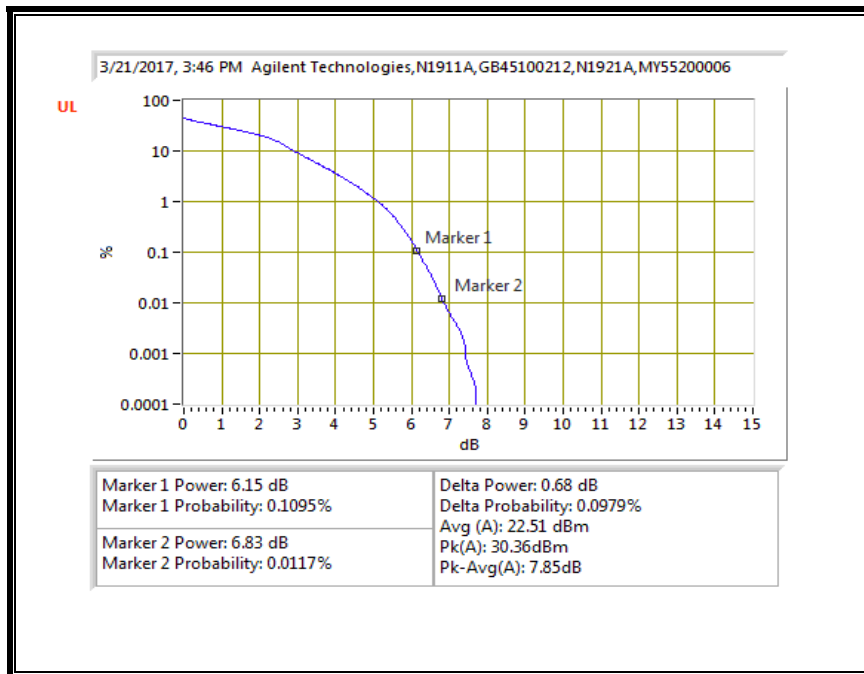

QPSK, (10.0 MHz BAND WIDTH)

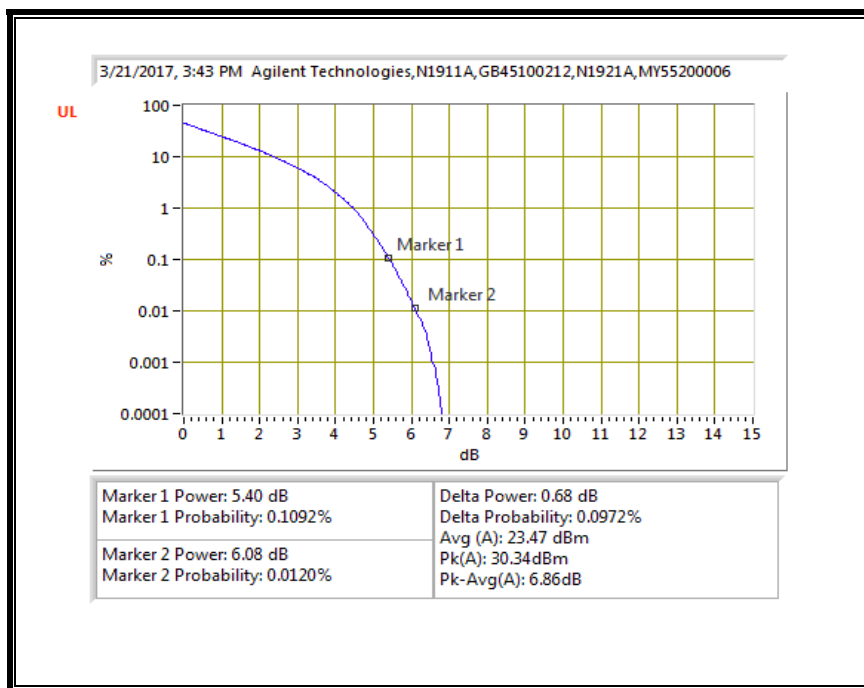


16QAM, (10.0 MHz BAND WIDTH)

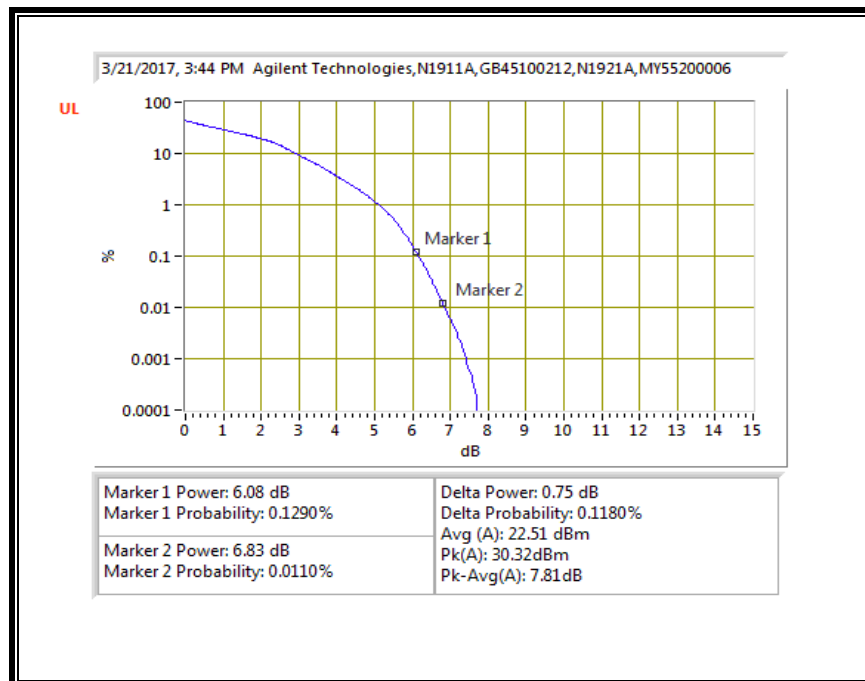


8.4.4. LTE BAND 7


QPSK, (5.0 MHz BAND WIDTH)

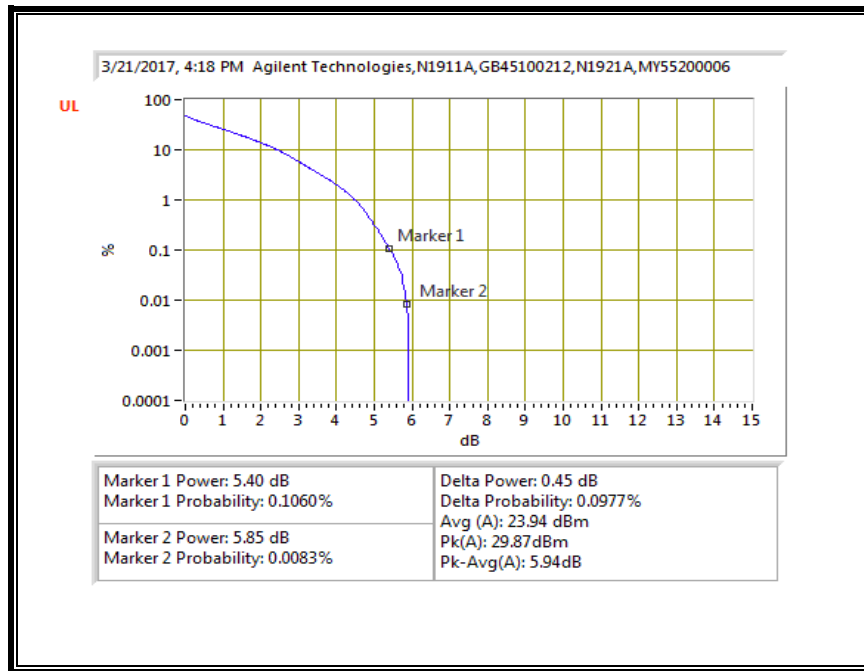


16QAM, (5.0 MHz BAND WIDTH)

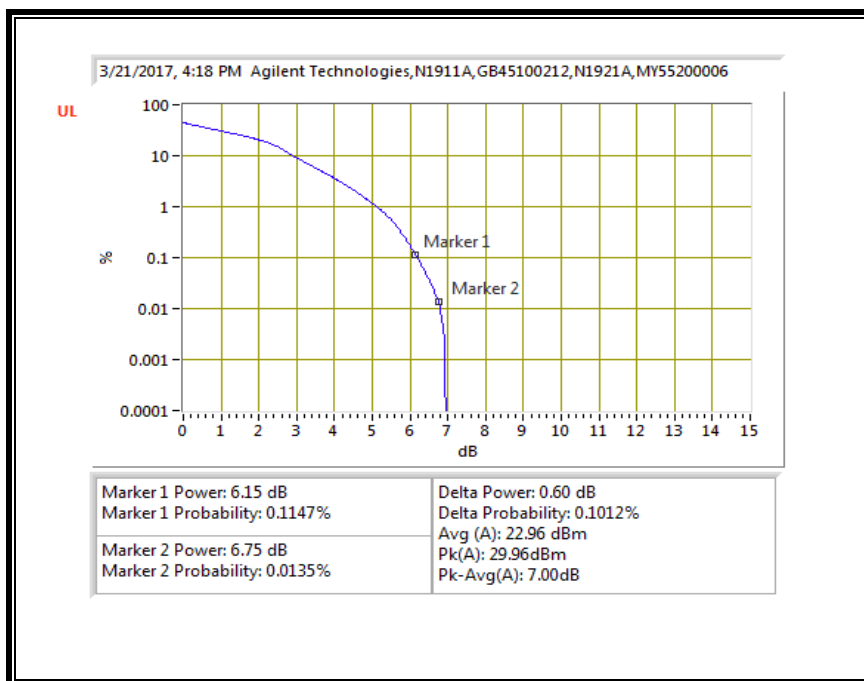


QPSK, (10.0 MHz BAND WIDTH)

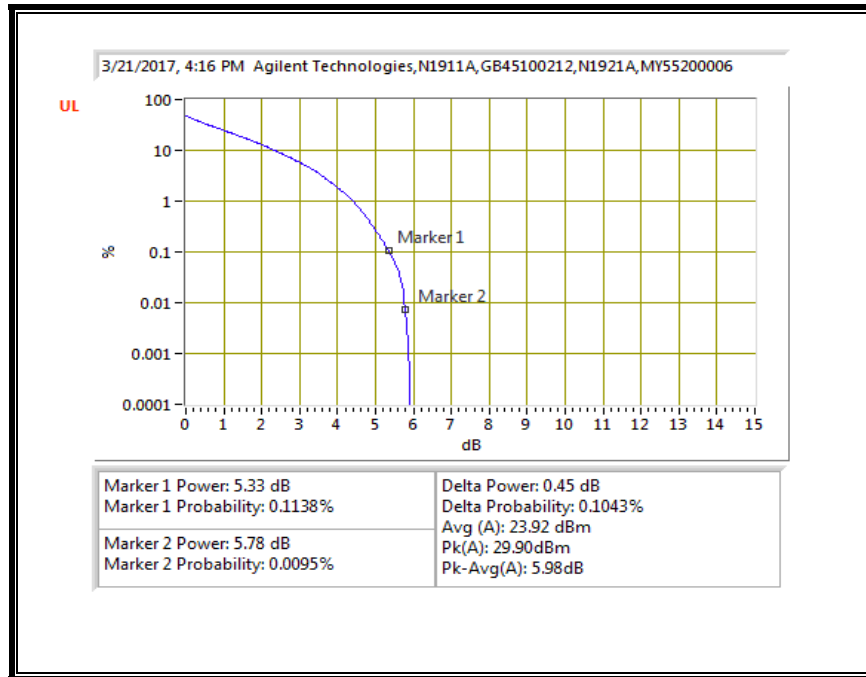


16QAM, (10.0 MHz BAND WIDTH)

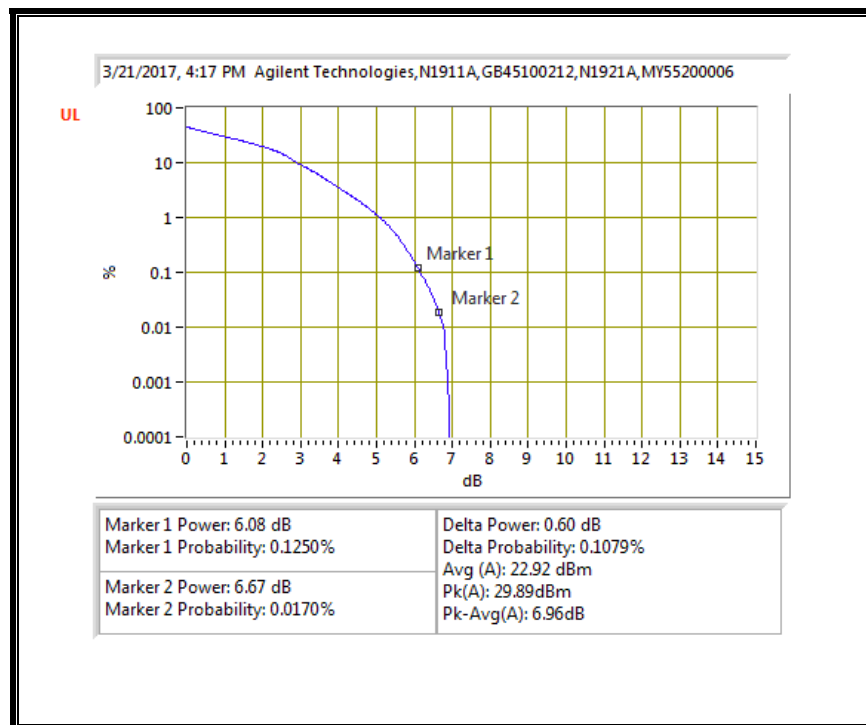


QPSK, (15.0 MHz BAND WIDTH)

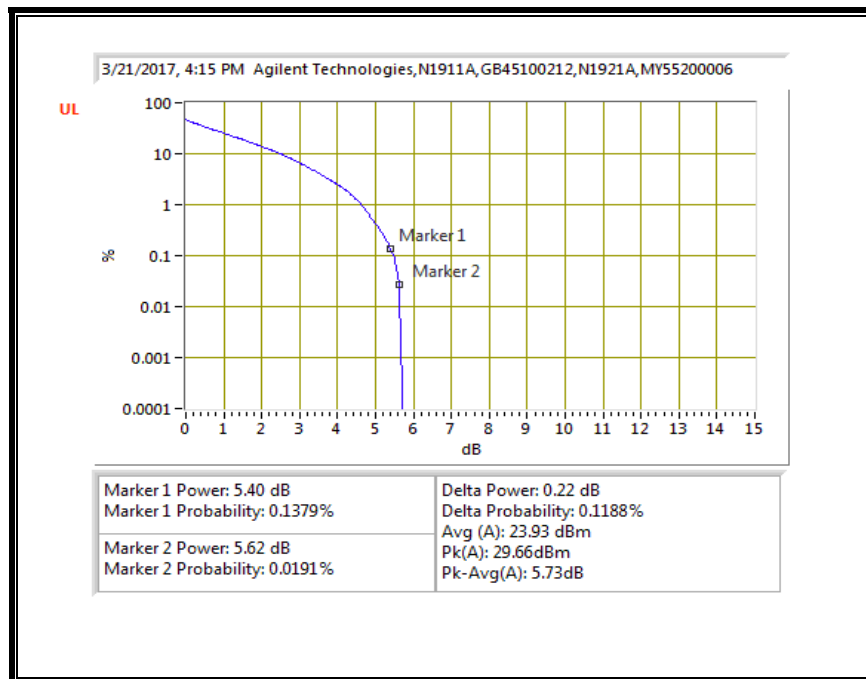


16QAM, (15.0 MHz BAND WIDTH)

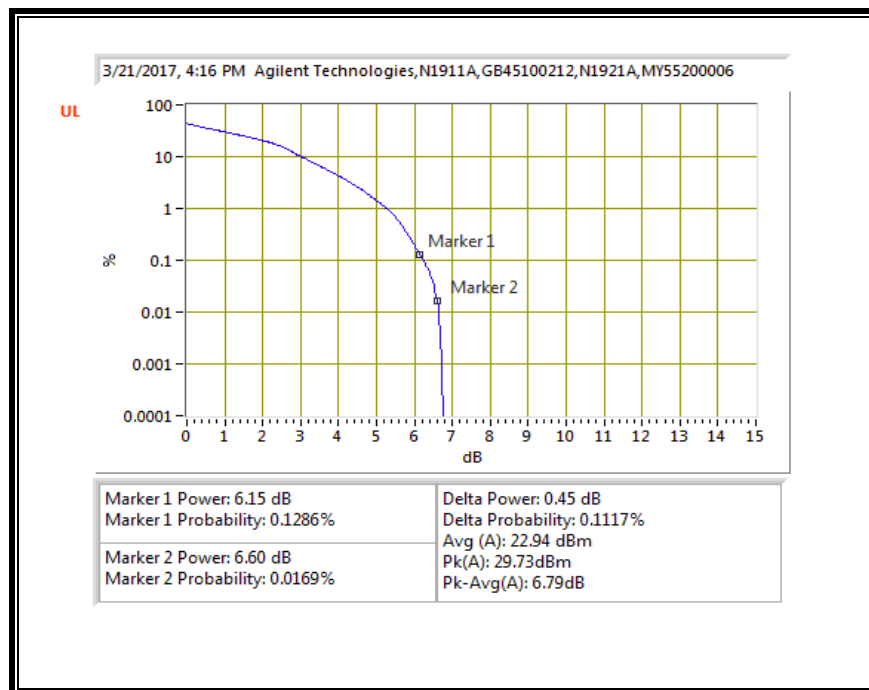

QPSK, (20.0 MHz BAND WIDTH)

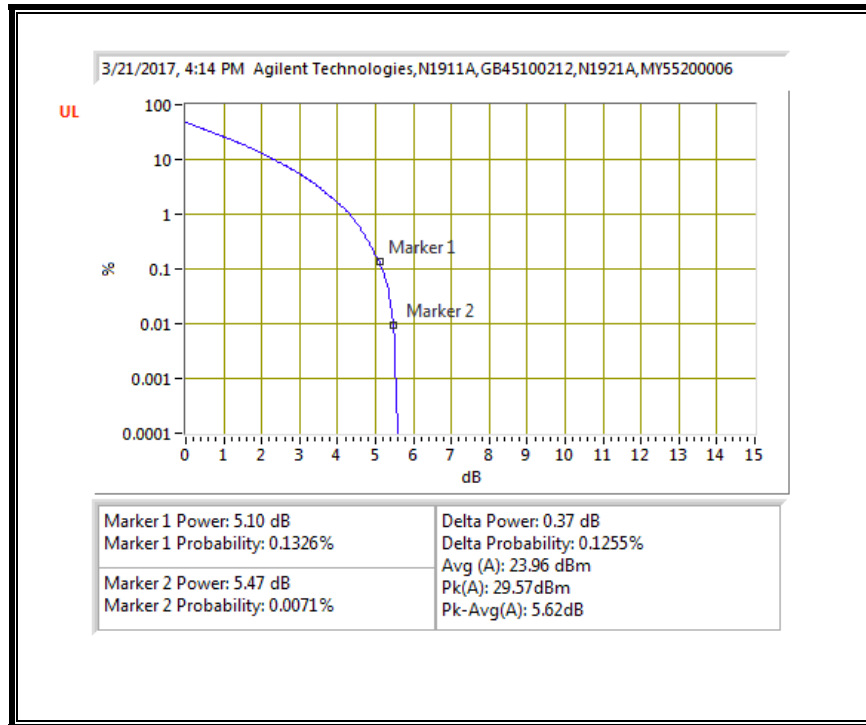


16QAM, (20.0 MHz BAND WIDTH)

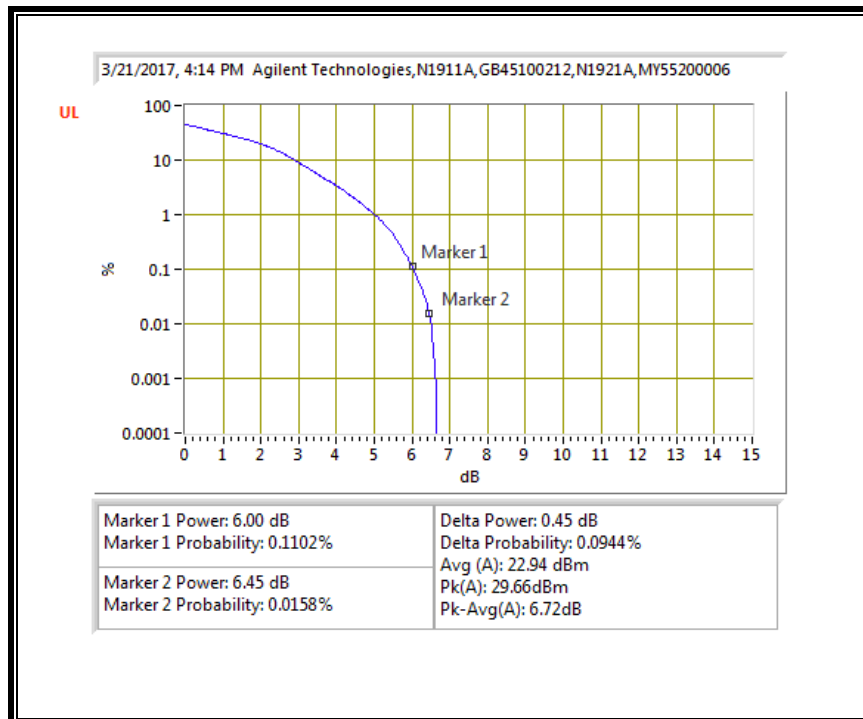


8.4.5. LTE BAND 12


QPSK, (1.4 MHz BAND WIDTH)

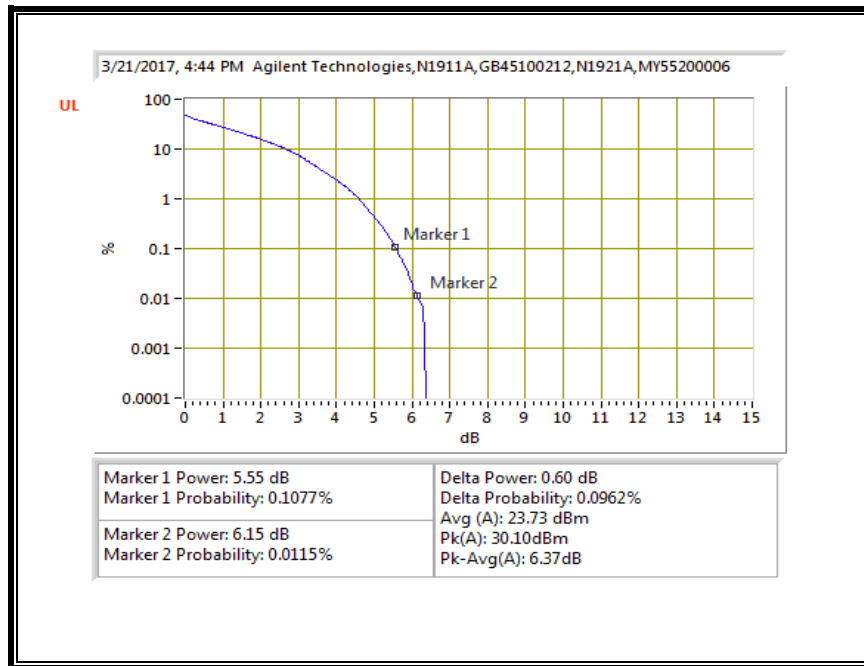


16QAM, (1.4 MHz BAND WIDTH)

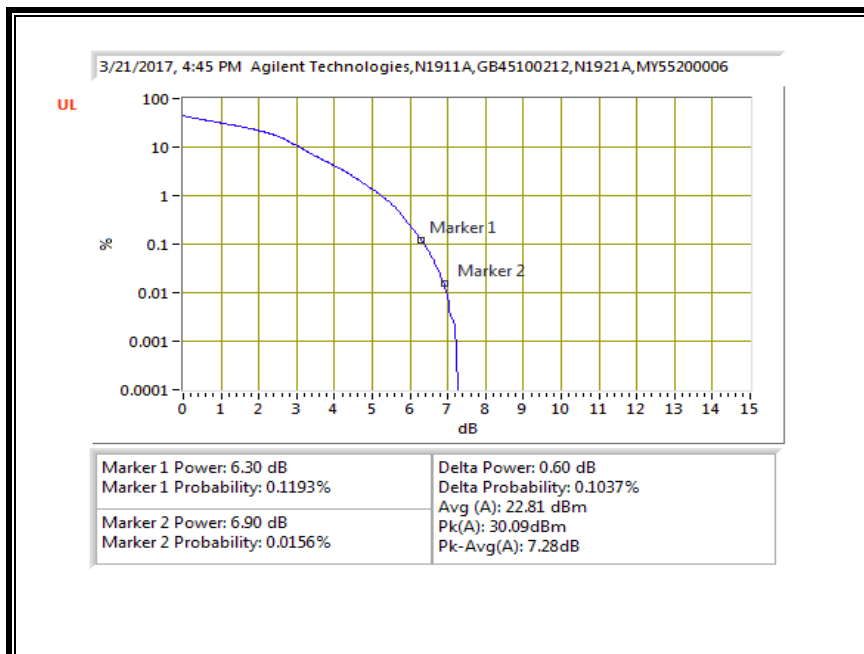


QPSK, (3.0 MHz BAND WIDTH)

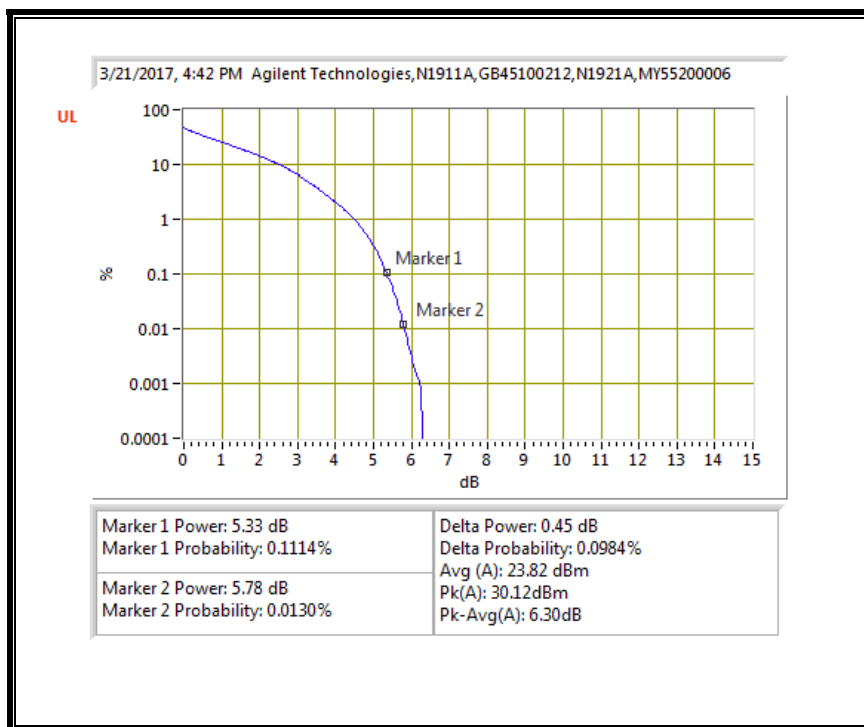


16QAM, (3.0 MHz BAND WIDTH)

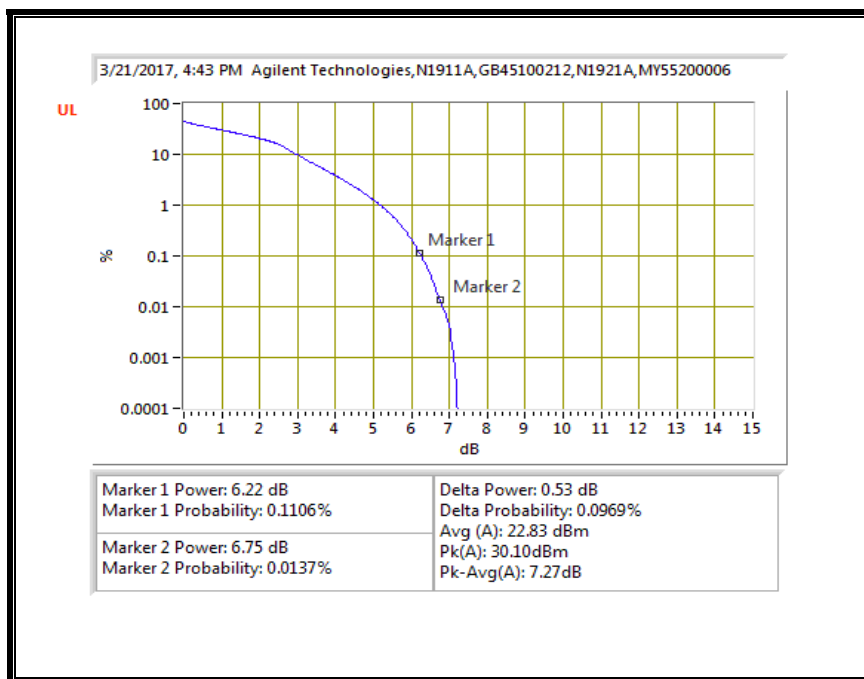


QPSK, (5.0 MHz BAND WIDTH)

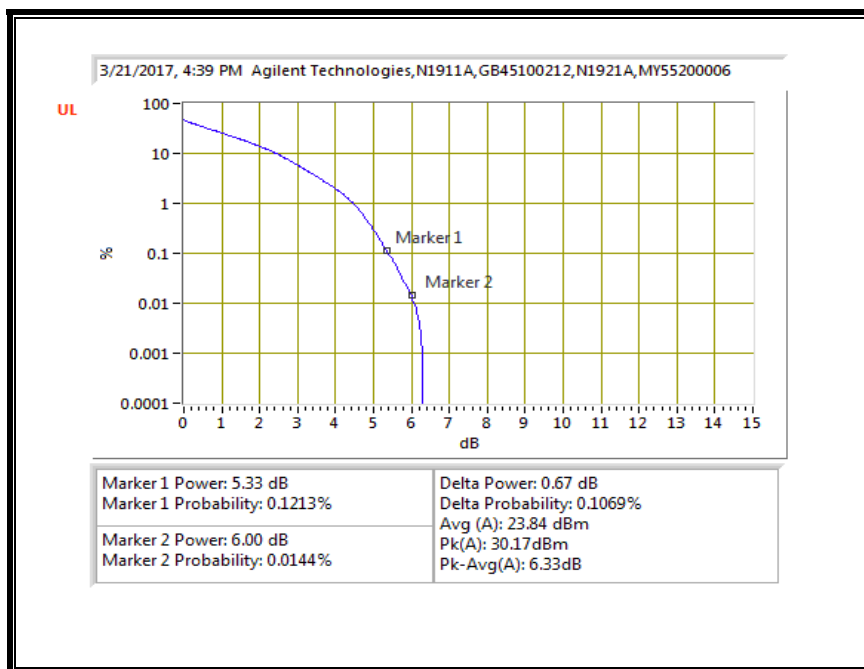


16QAM, (5.0 MHz BAND WIDTH)

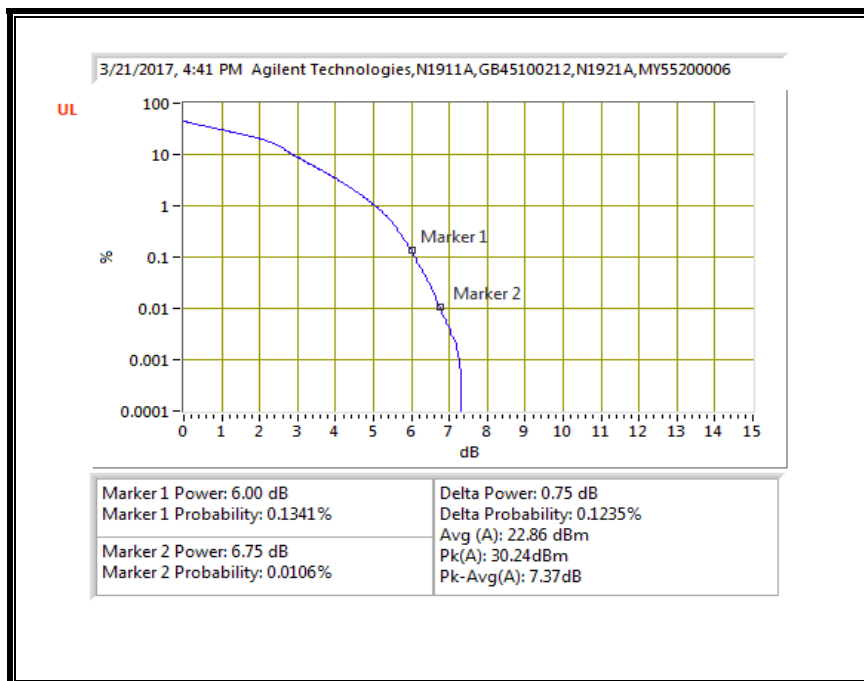

QPSK, (10.0 MHz BAND WIDTH)

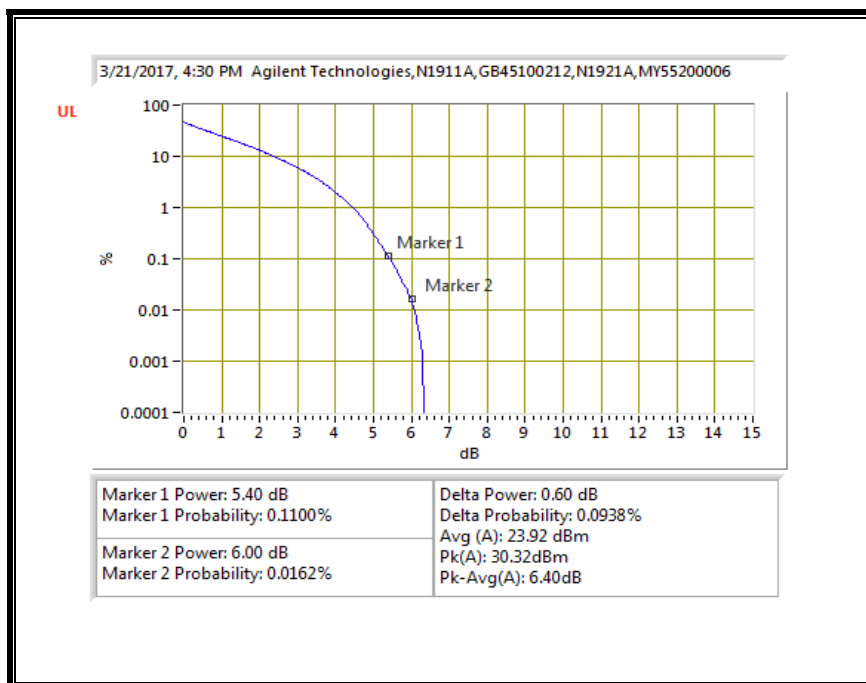


16QAM, (10.0 MHz BAND WIDTH)

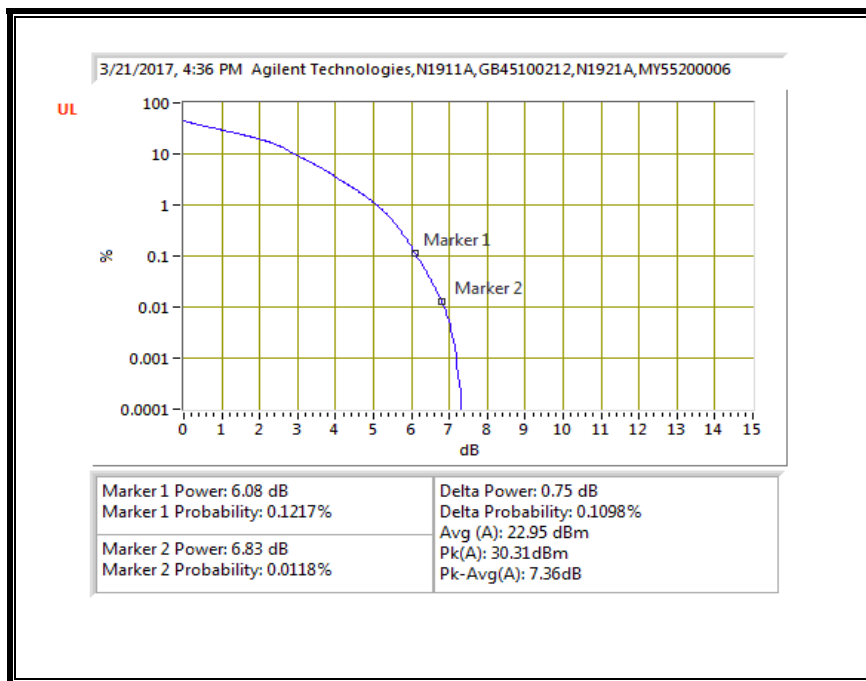


8.4.6. LTE BAND 13


QPSK, (5.0 MHz BAND WIDTH)

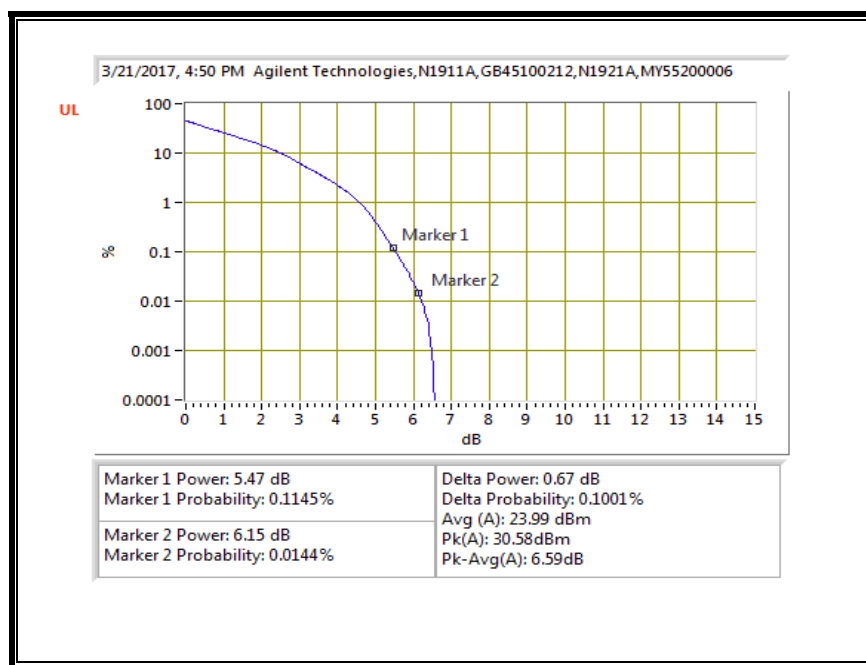


16QAM, (5.0 MHz BAND WIDTH)

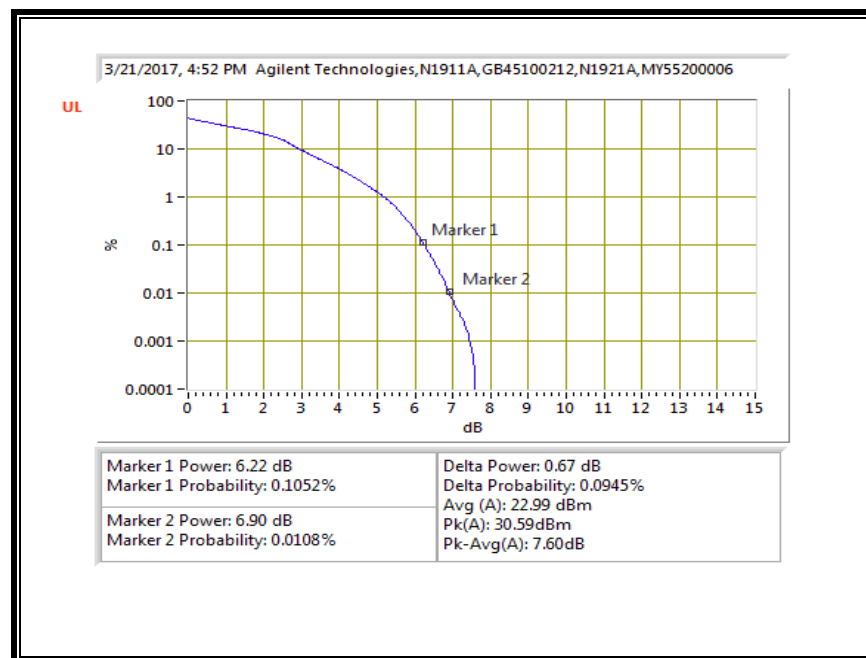

QPSK, (10.0 MHz BAND WIDTH)

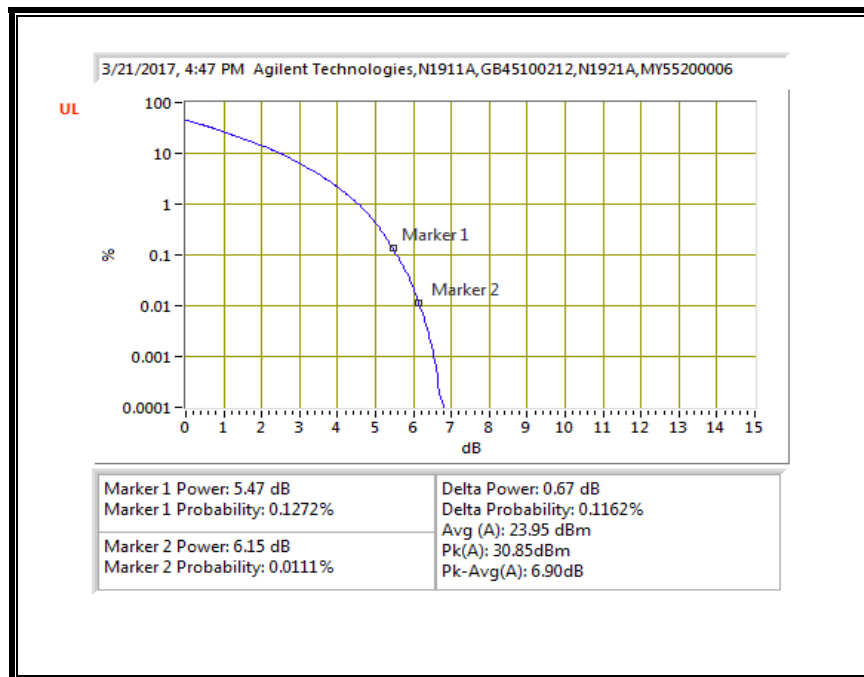


16QAM, (10.0 MHz BAND WIDTH)

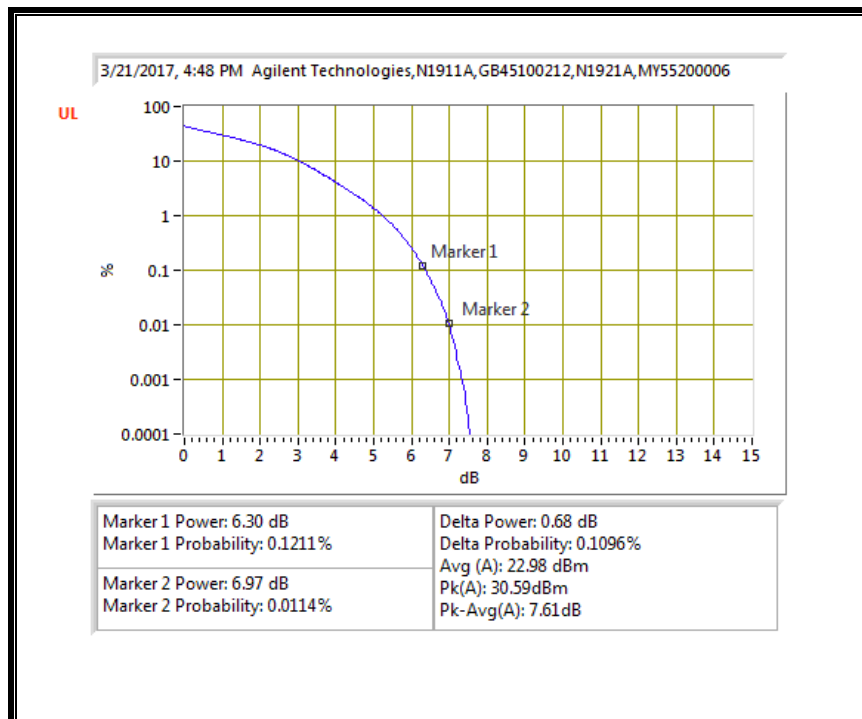


8.4.7. LTE BAND 17


QPSK, (5.0 MHz BAND WIDTH)

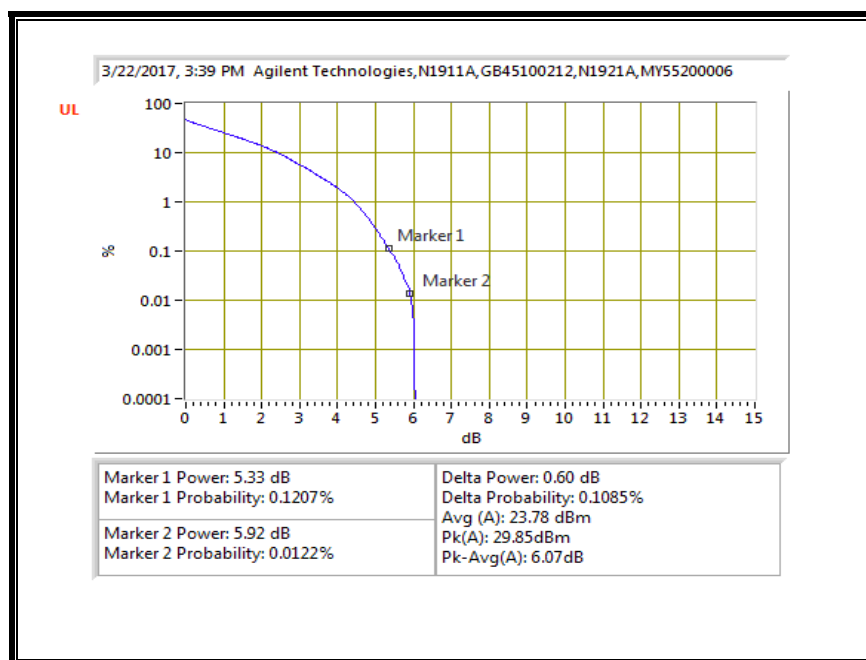


16QAM, (5.0 MHz BAND WIDTH)

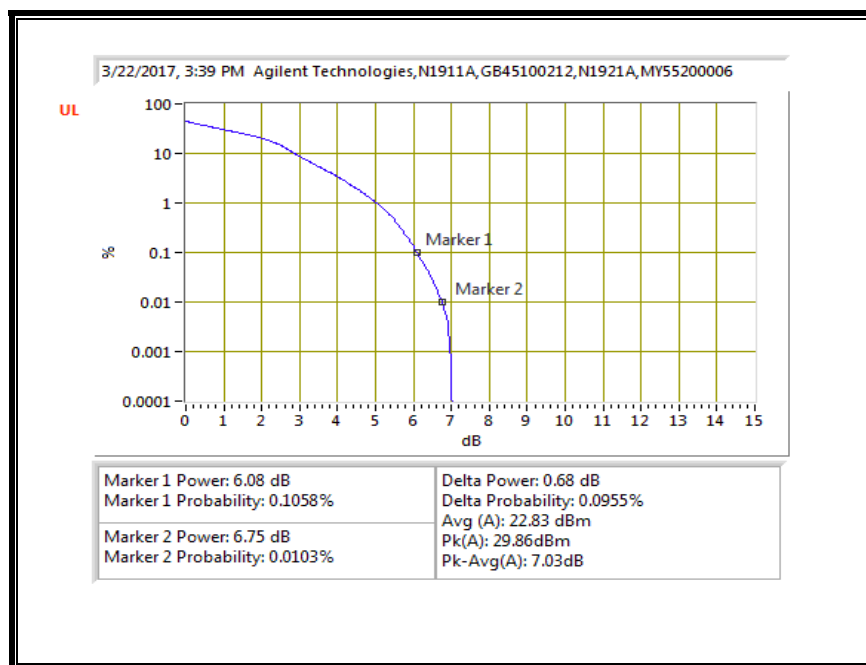

QPSK, (10.0 MHz BAND WIDTH)

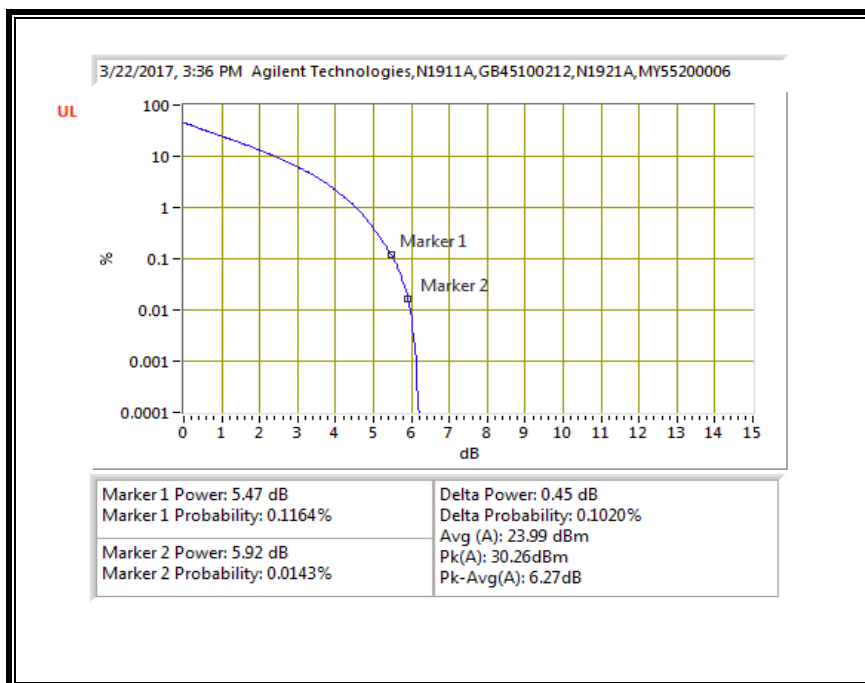


16QAM, (10.0 MHz BAND WIDTH)

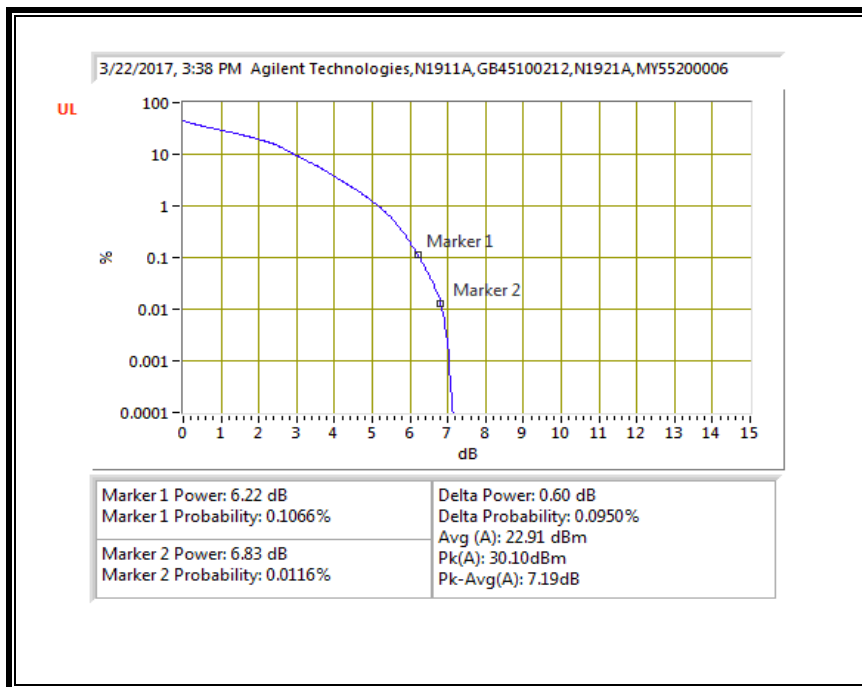


8.4.8. LTE BAND 25


QPSK, (1.4 MHz BAND WIDTH)

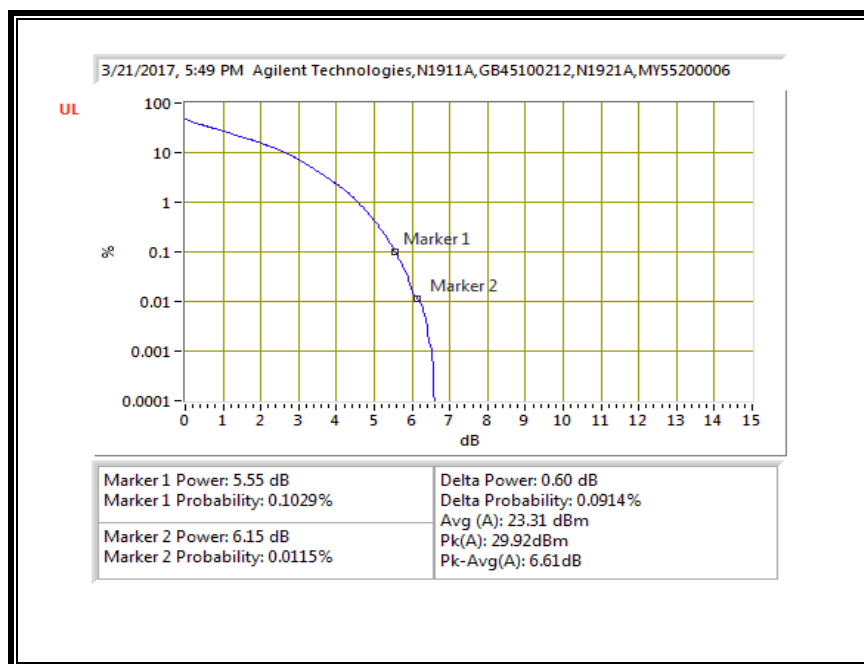


16QAM, (1.4 MHz BAND WIDTH)

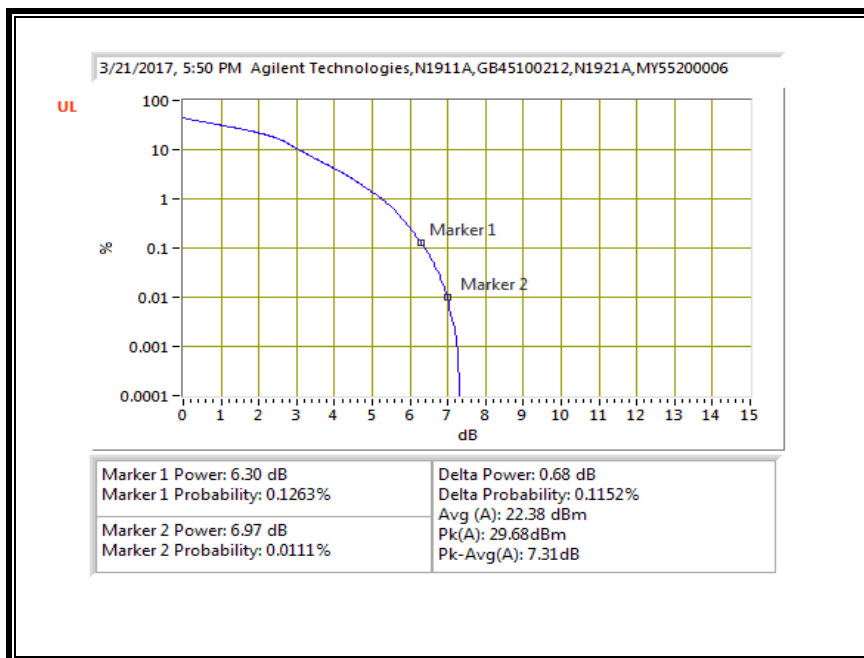


QPSK, (3.0 MHz BAND WIDTH)

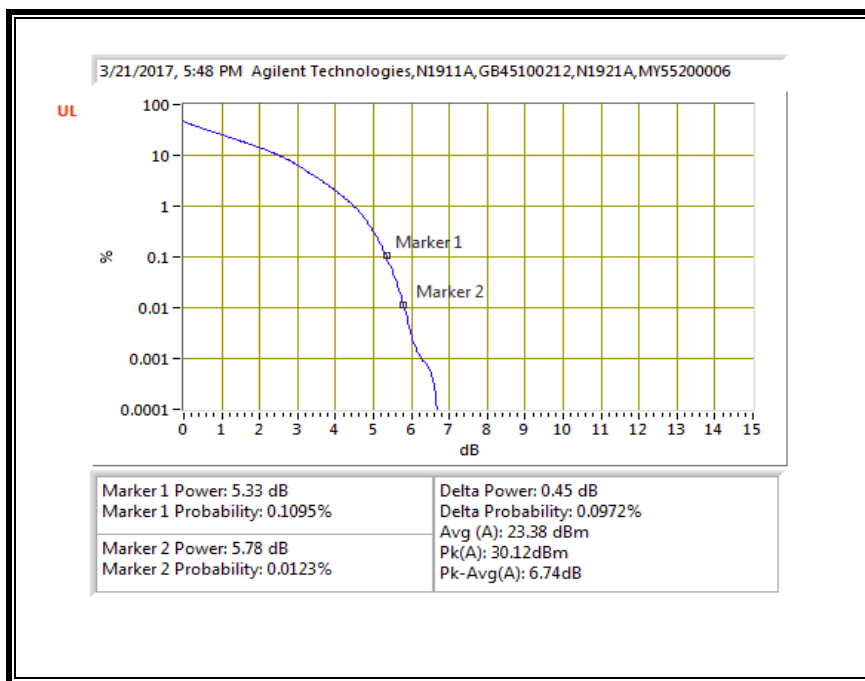


16QAM, (3.0 MHz BAND WIDTH)

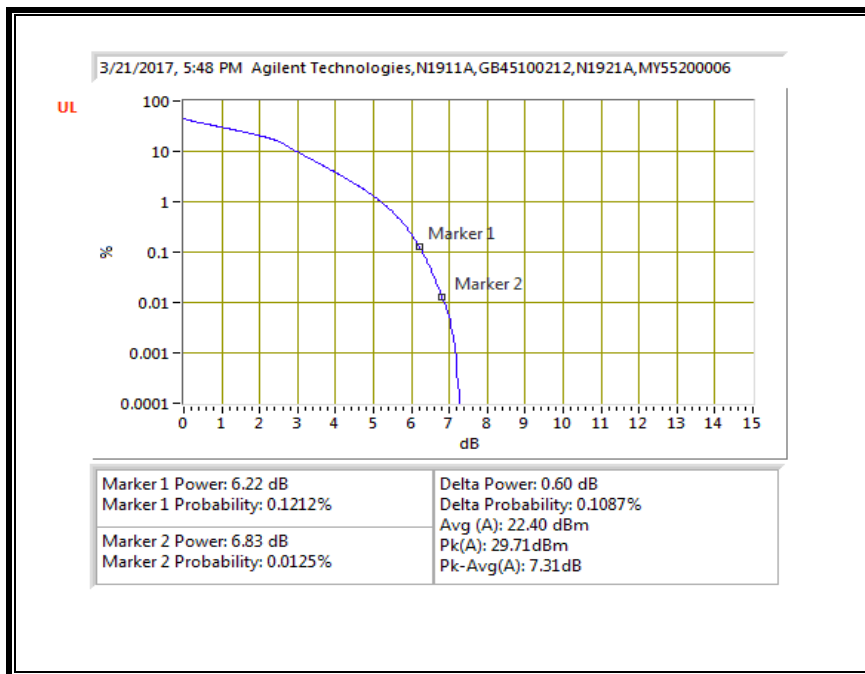


QPSK, (5.0 MHz BAND WIDTH)

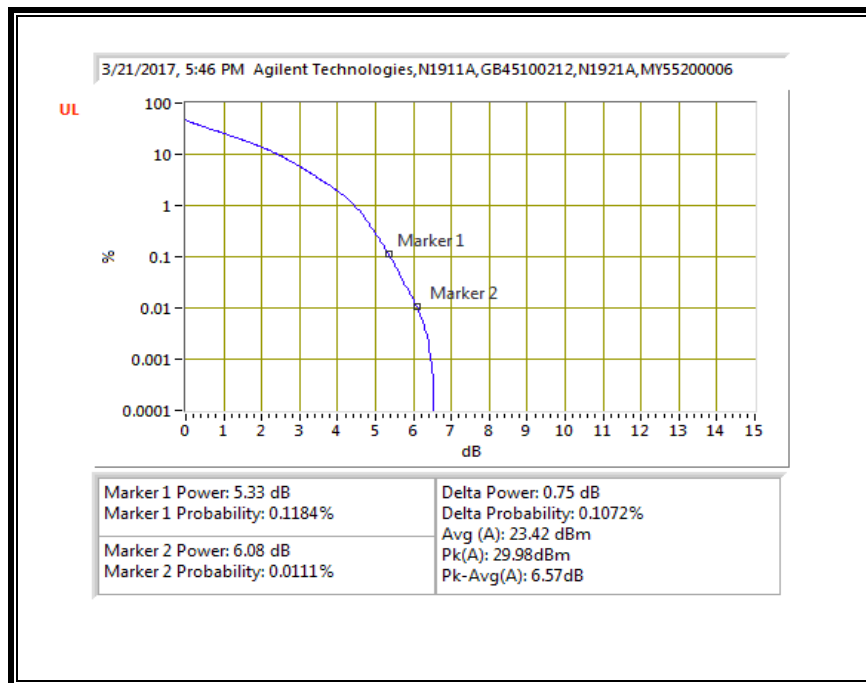


16QAM, (5.0 MHz BAND WIDTH)

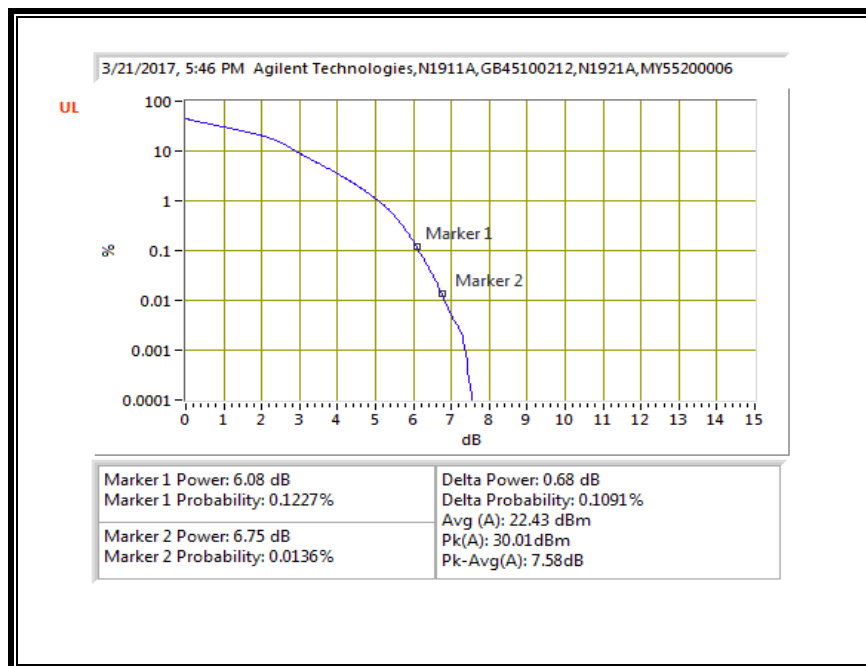


QPSK, (10.0 MHz BAND WIDTH)

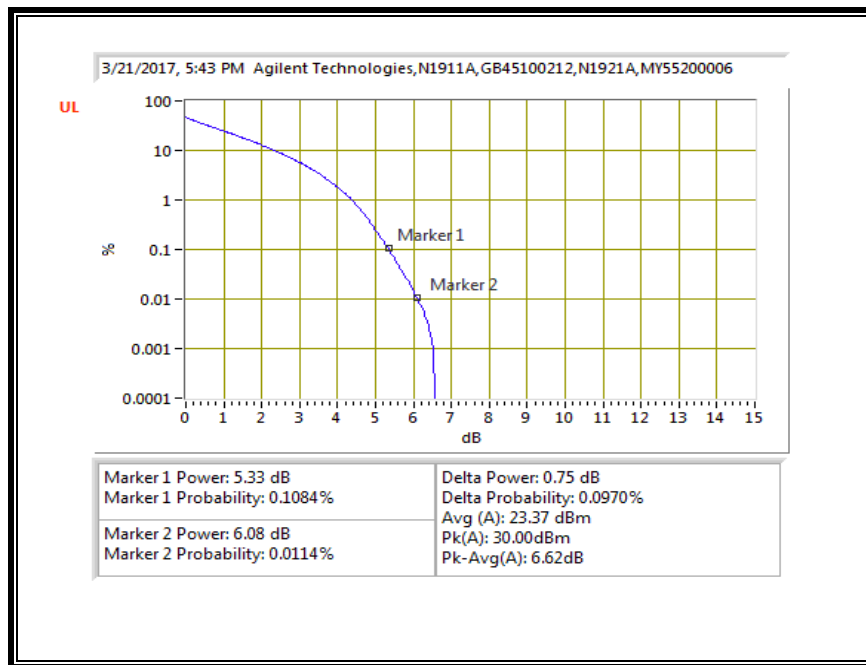


16QAM, (10.0 MHz BAND WIDTH)

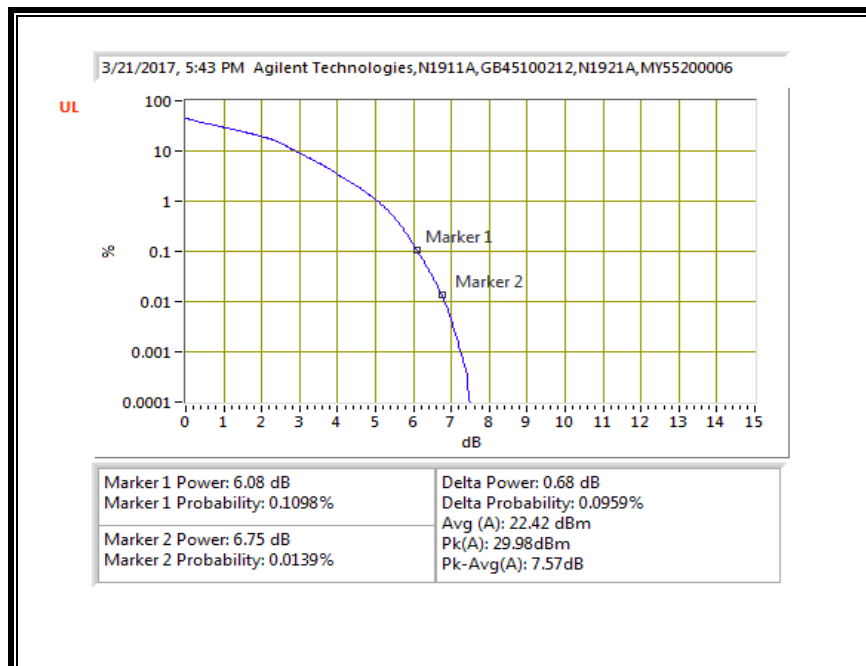


QPSK, (15.0 MHz BAND WIDTH)

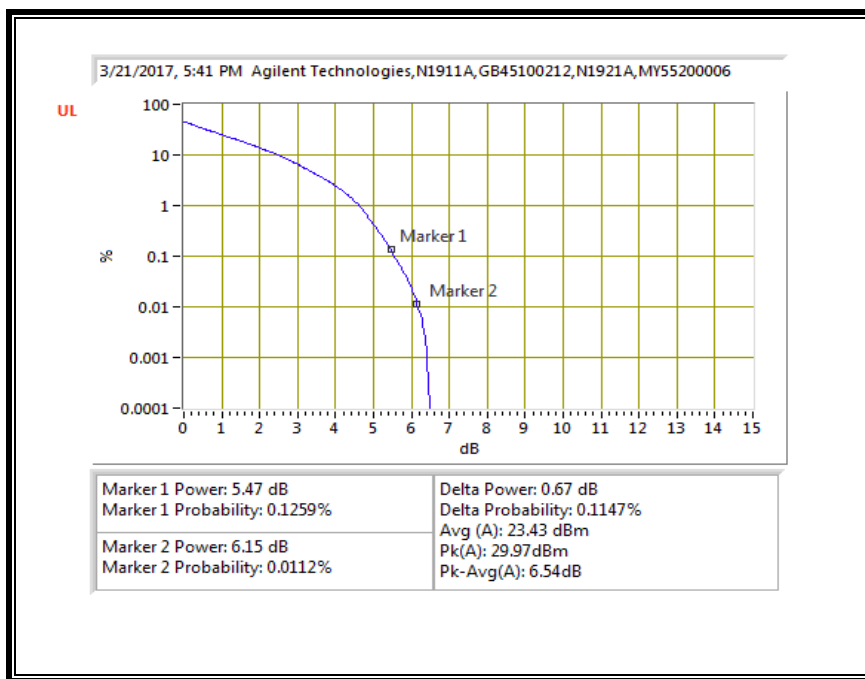


16QAM, (15.0 MHz BAND WIDTH)

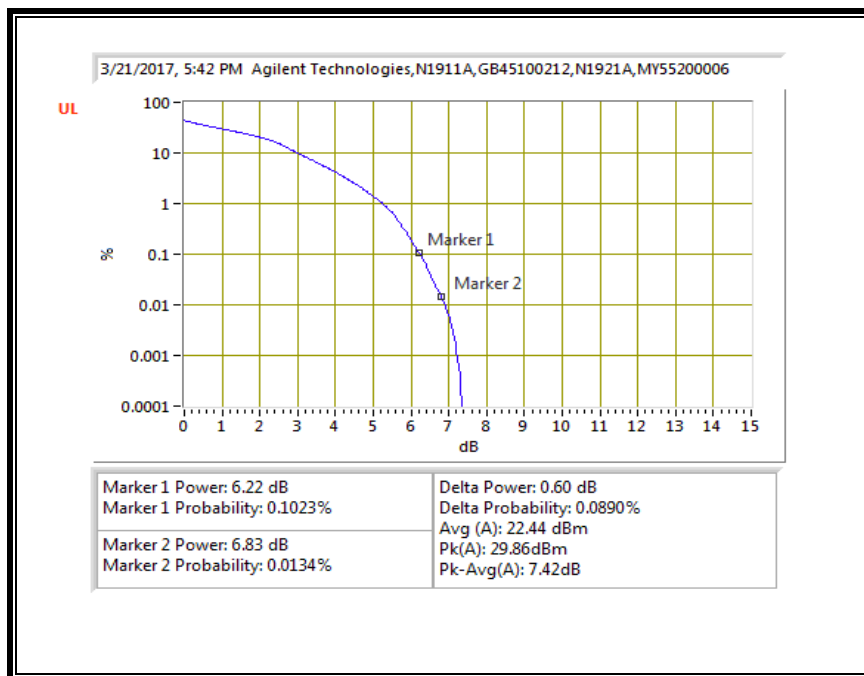

QPSK, (20.0 MHz BAND WIDTH)

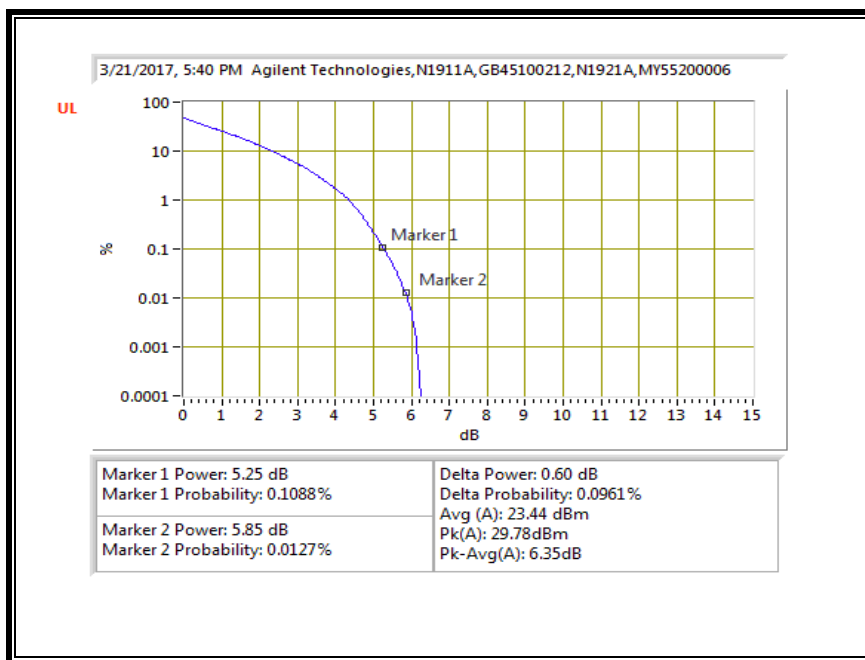


16QAM, (20.0 MHz BAND WIDTH)

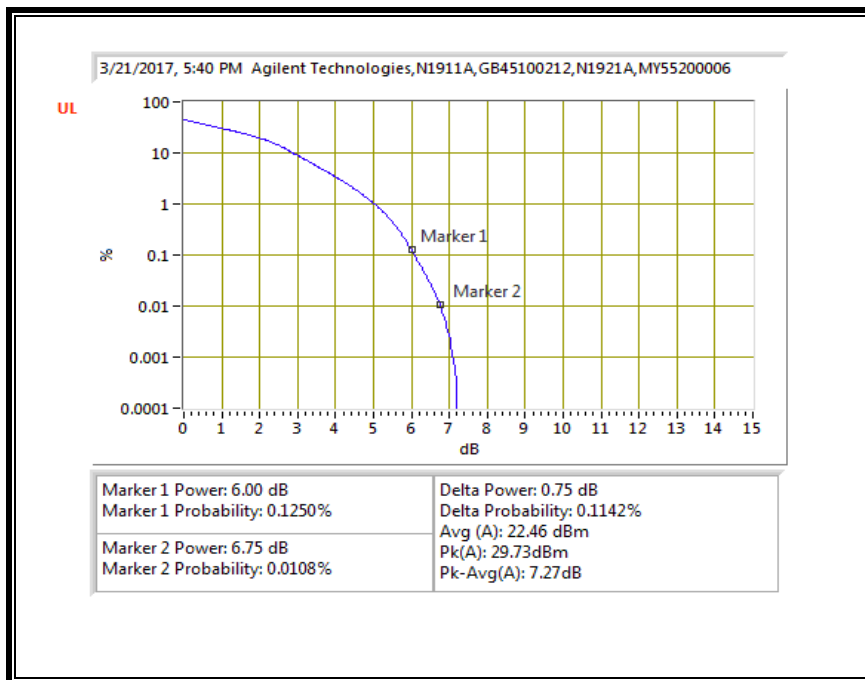


8.4.9. LTE BAND 26


QPSK, (1.4 MHz BAND WIDTH)

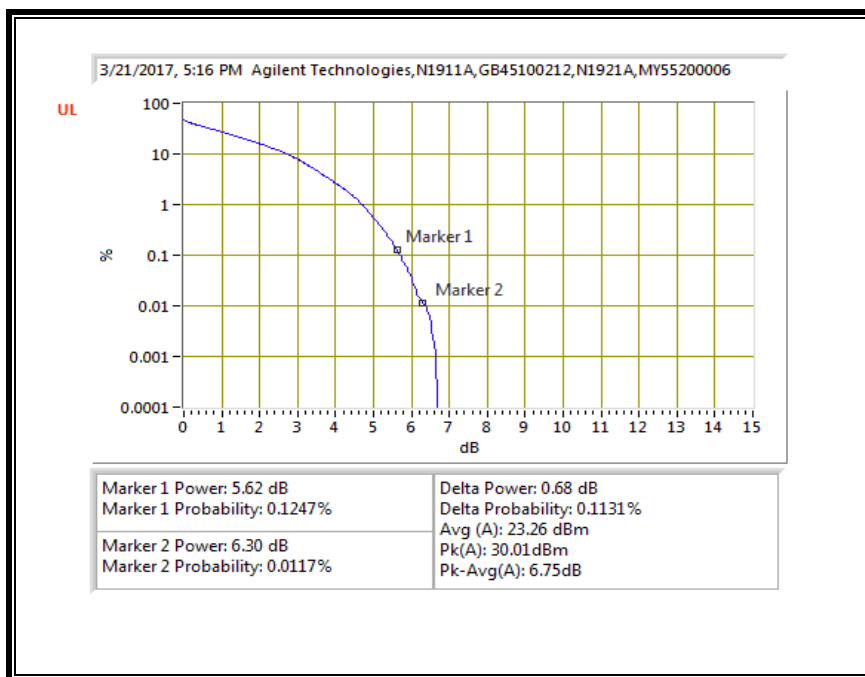


16QAM, (1.4 MHz BAND WIDTH)

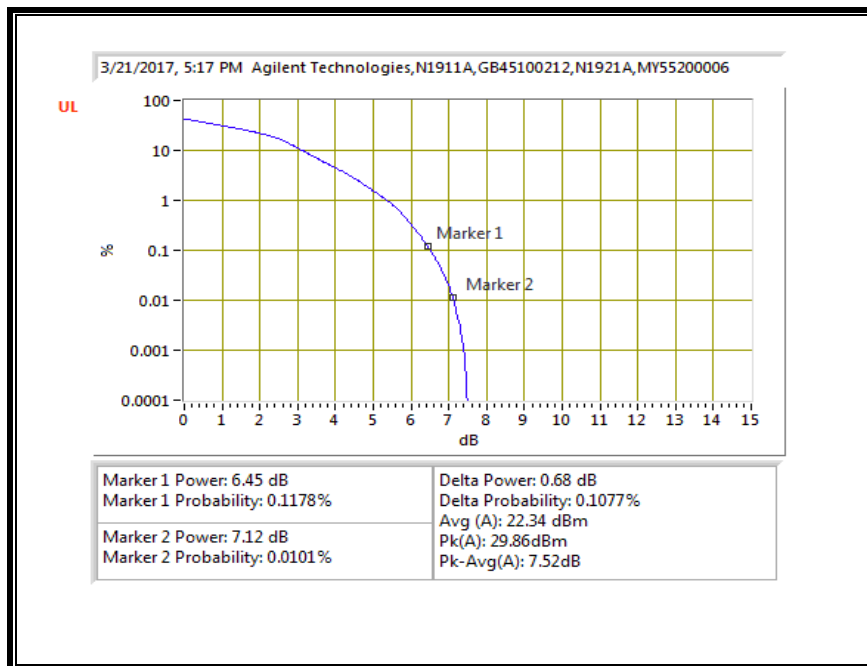


QPSK, (3.0 MHz BAND WIDTH)

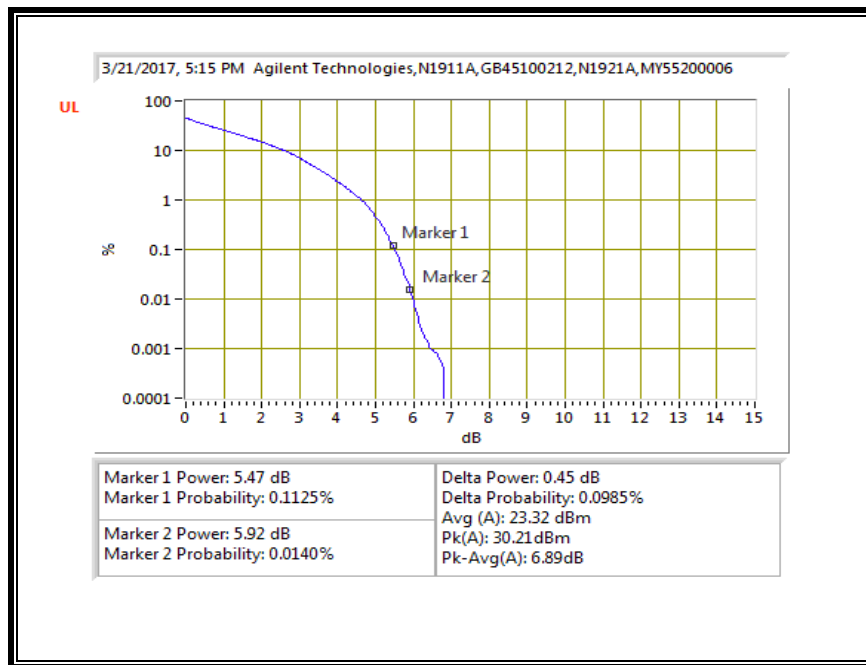


16QAM, (3.0 MHz BAND WIDTH)

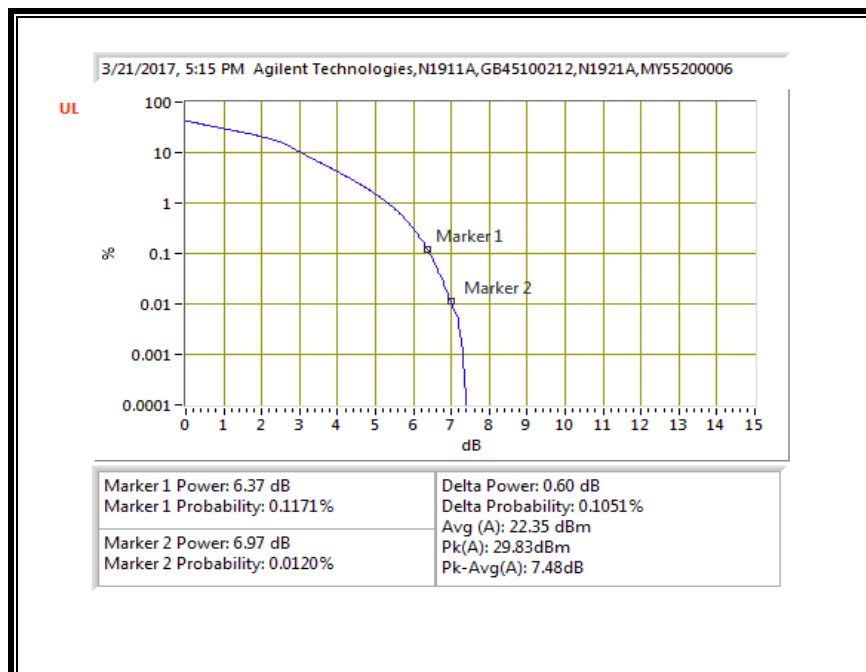


QPSK, (5.0 MHz BAND WIDTH)

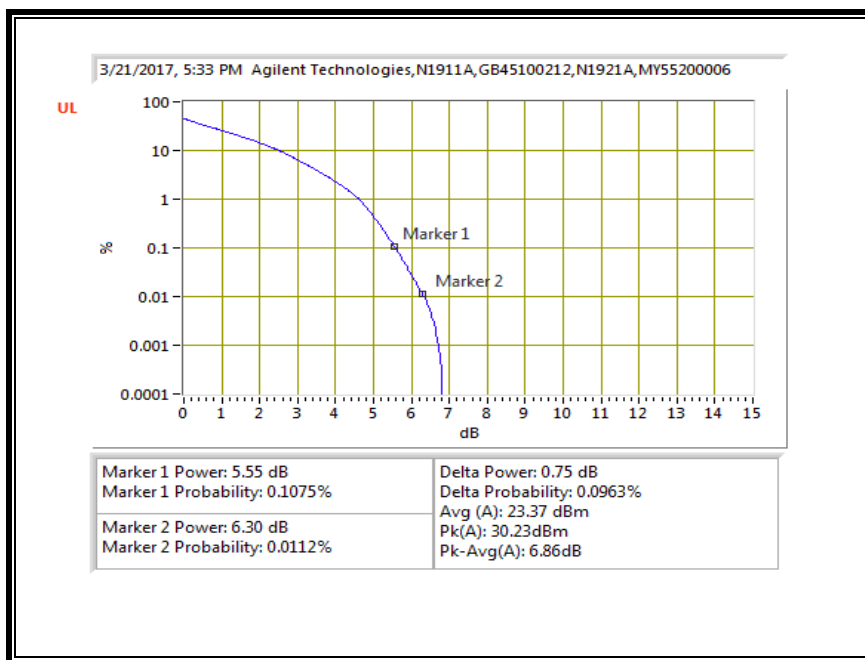


16QAM, (5.0 MHz BAND WIDTH)

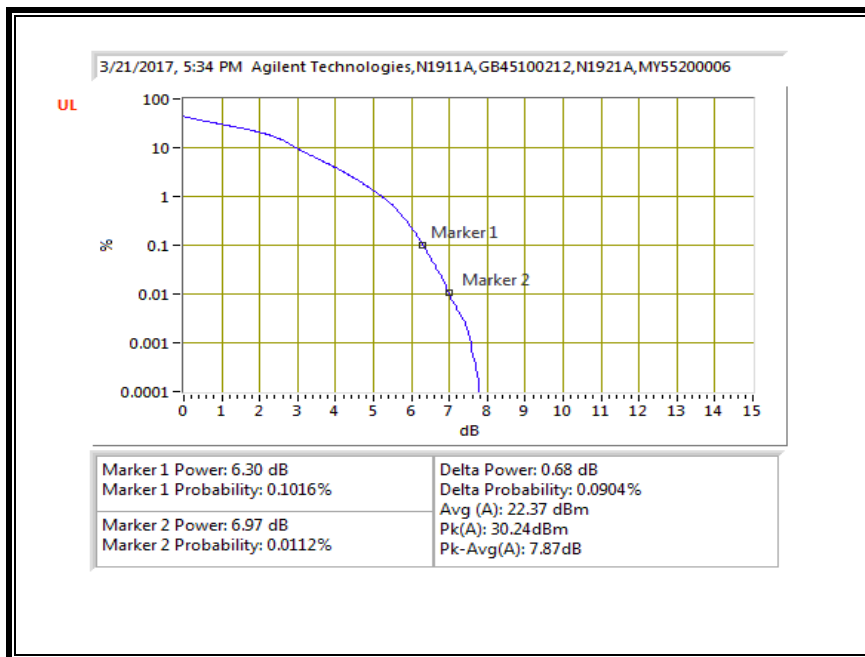

QPSK, (10.0 MHz BAND WIDTH)

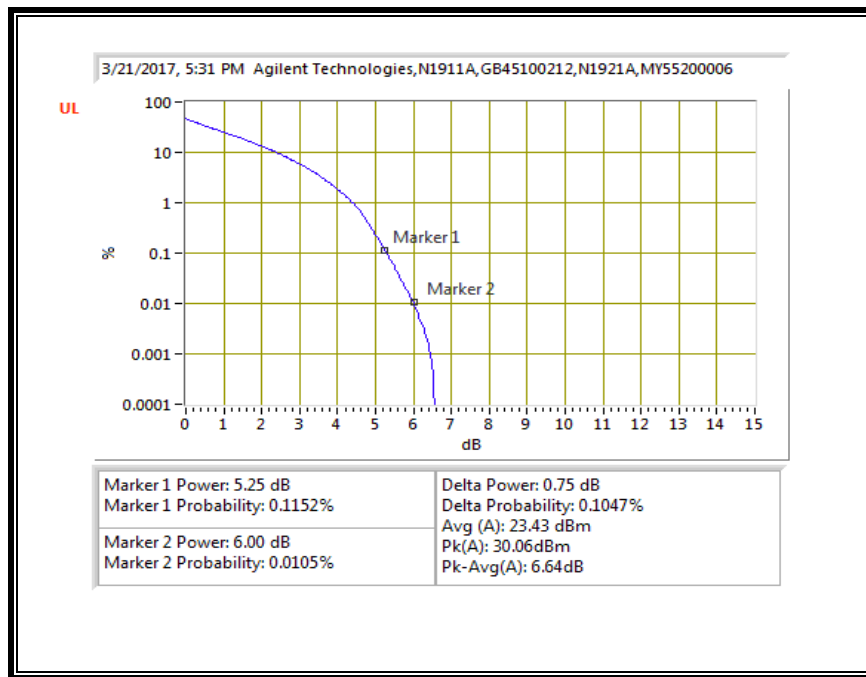


16QAM, (10.0 MHz BAND WIDTH)

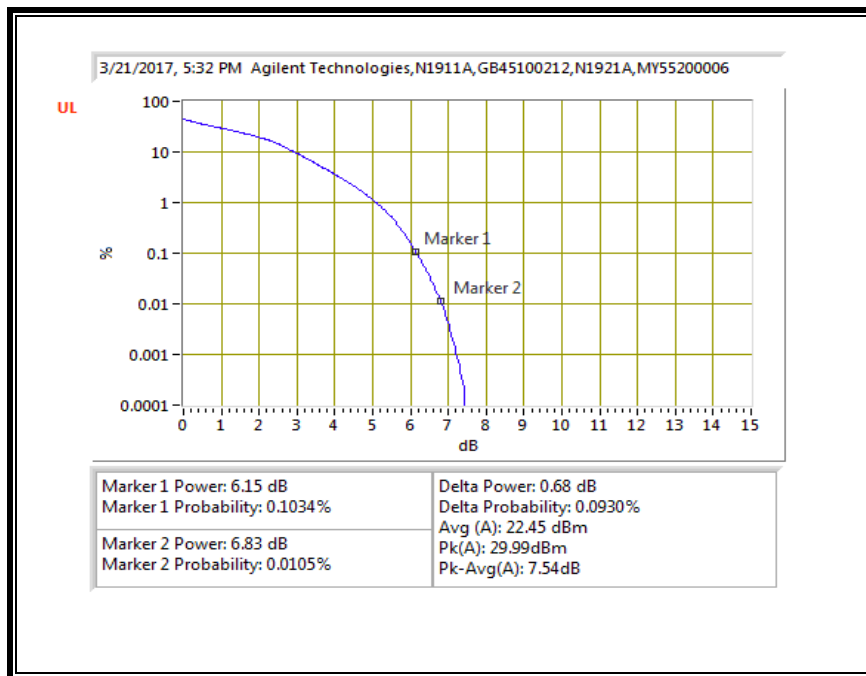


8.4.10. LTE BAND 30


QPSK, (5.0 MHz BAND WIDTH)

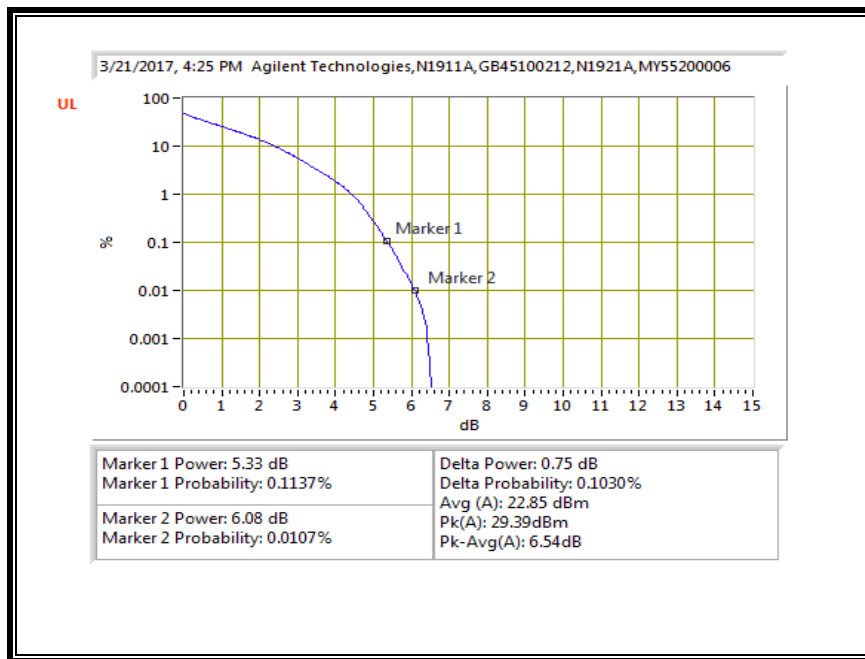


16QAM, (5.0 MHz BAND WIDTH)

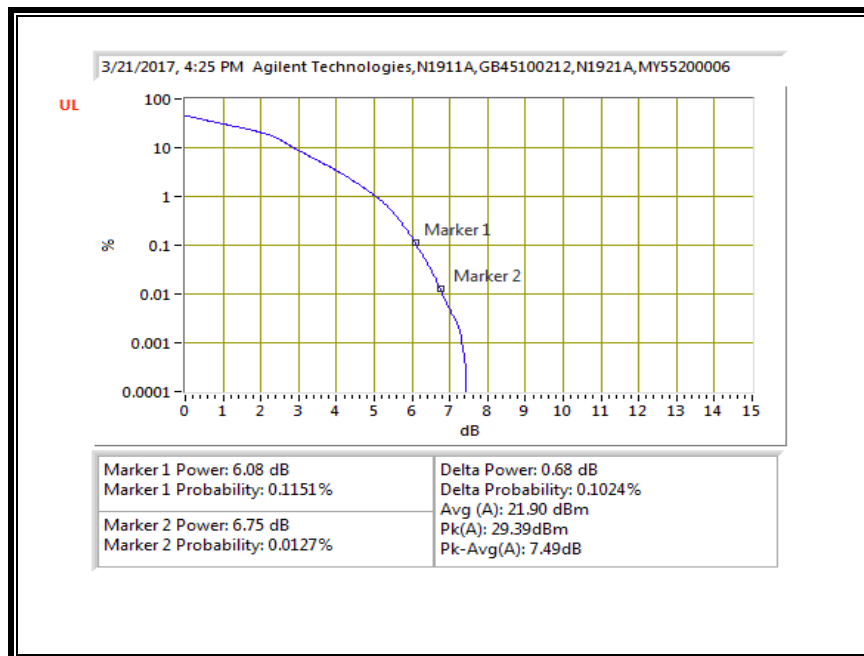

QPSK, (10.0 MHz BAND WIDTH)

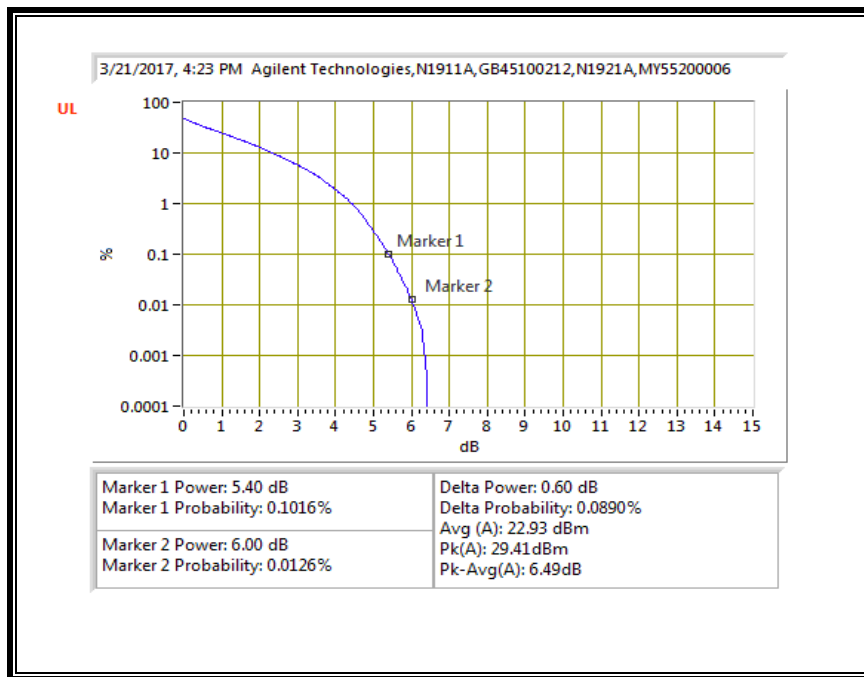

16QAM, (10.0 MHz BAND WIDTH)

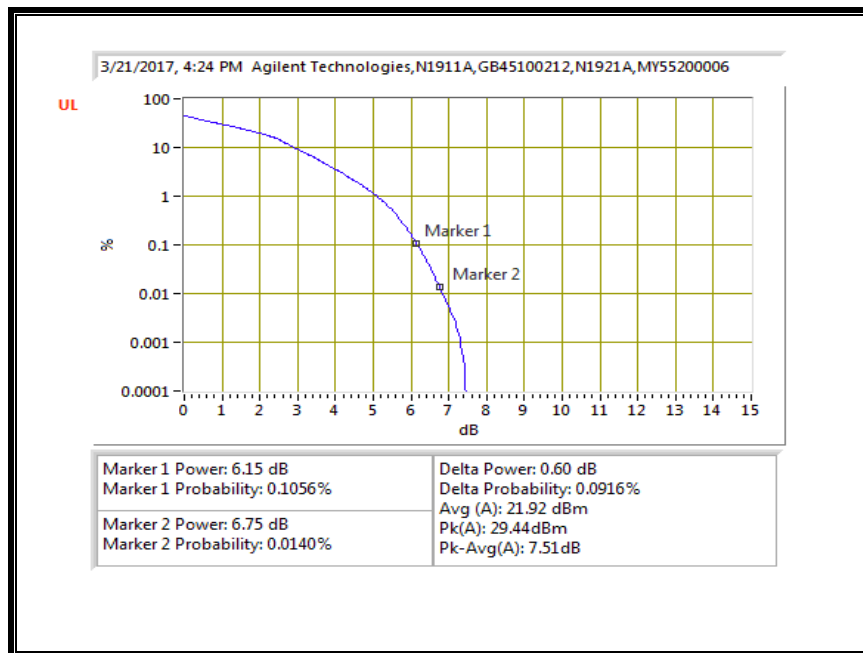


8.4.11. LTE BAND 41

ID:	40813	Date:	3/22/17
------------	-------	--------------	---------


Mode	Channel Band-	Frequency (MHz)	RB Size	RB OffSet	Modulation	Conducted Power (dBm)		Peak-to-Average Ratio
						Peak	Average	
LTE Band 41	5MHz	2593.0	25	0	QPSK	30.22	16.90	6.31
					16QAM	30.46	15.91	7.54
	10MHz		50	0	QPSK	30.44	16.86	6.57
					16QAM	30.21	15.89	7.31
	15MHz		75	0	QPSK	30.36	16.89	6.46
					16QAM	30.31	15.89	7.41
	20MHz		100	0	QPSK	30.28	16.88	6.39
					16QAM	30.21	15.9	7.30
Duty Cycle Correction Factor (dB)=			7.01					
Peak to Average Ratio= Peak Reading - Average Reading - Duty Cycle Correction Factor								

8.4.12. LTE BAND 66


QPSK, (5.0 MHz BAND WIDTH)

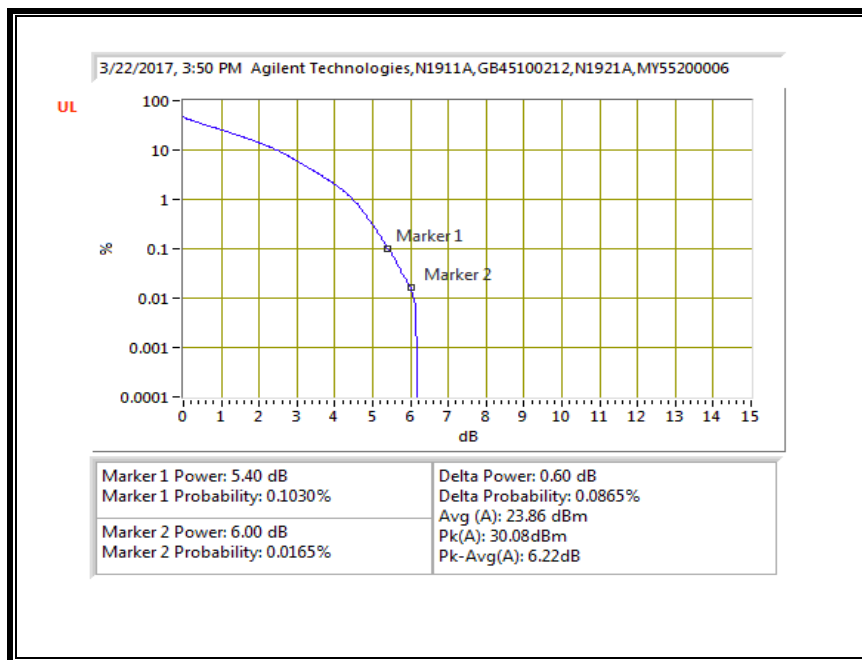


16QAM, (5.0 MHz BAND WIDTH)

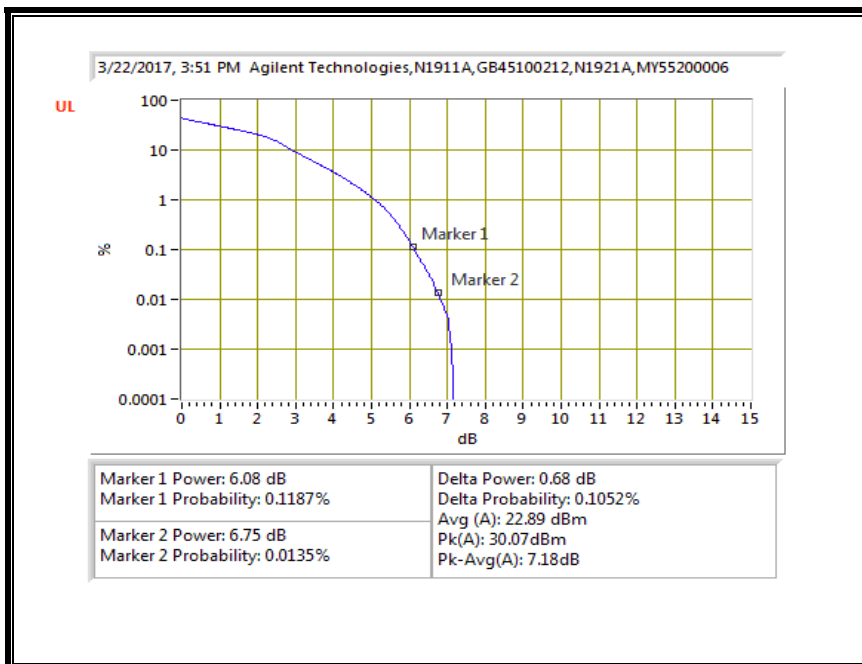


QPSK, (10.0 MHz BAND WIDTH)

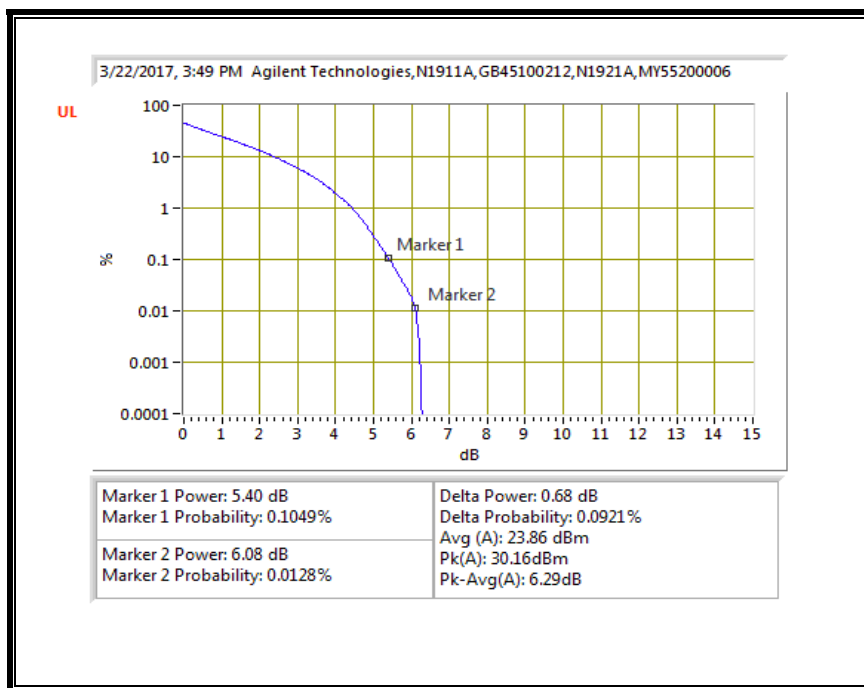


16QAM, (10.0 MHz BAND WIDTH)

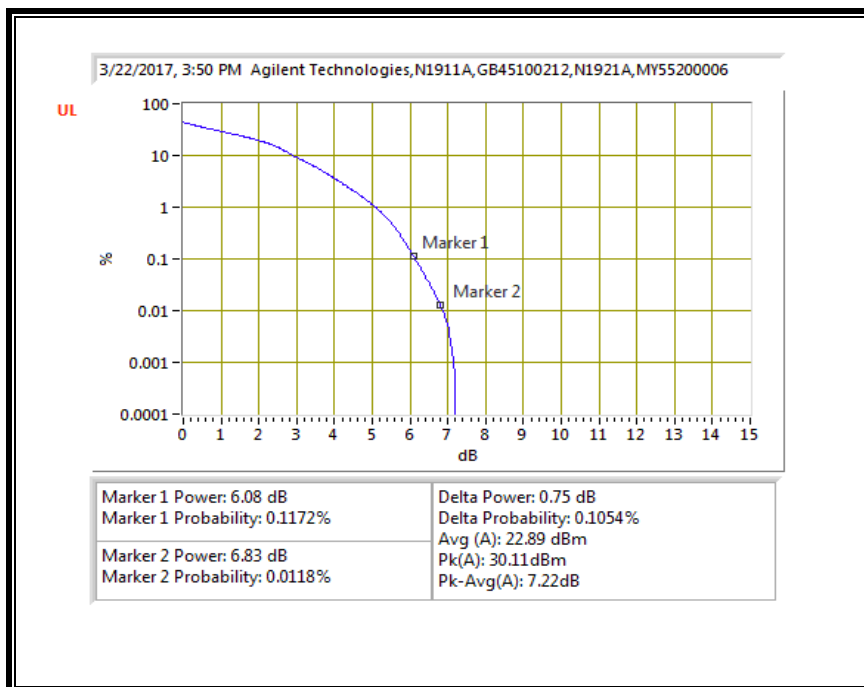


QPSK, (15.0 MHz BAND WIDTH)

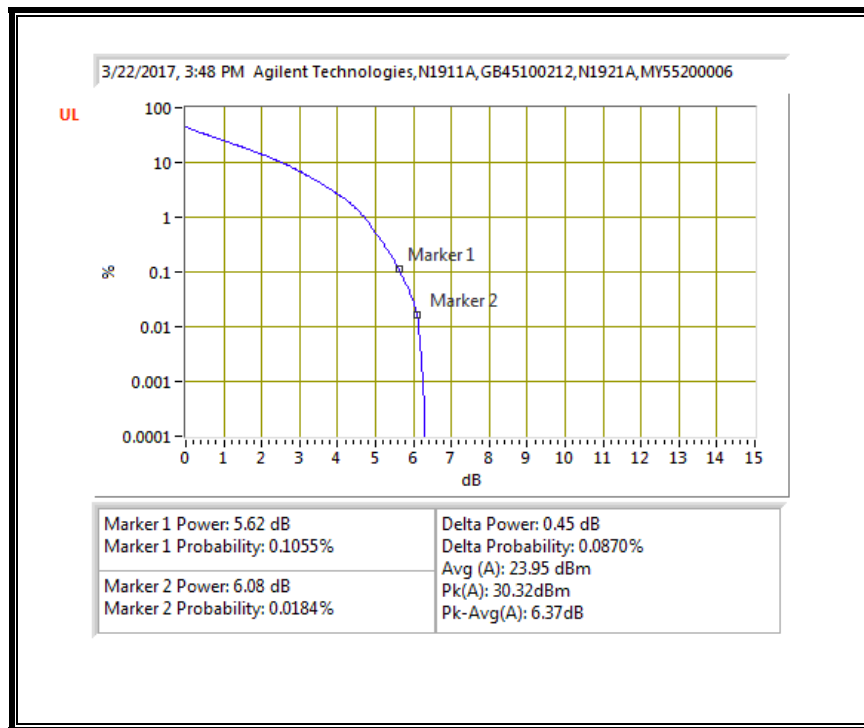


16QAM, (15.0 MHz BAND WIDTH)

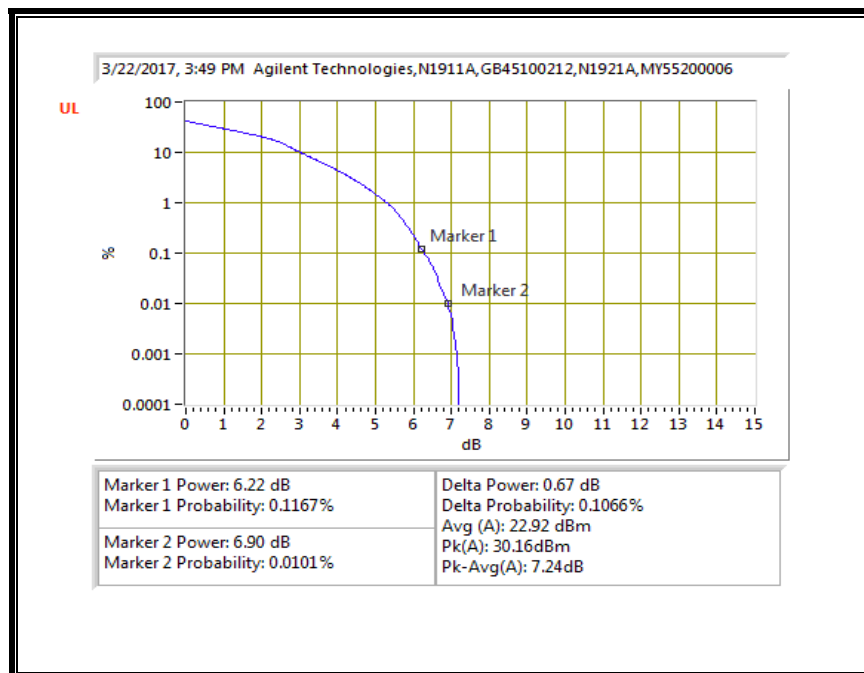

QPSK, (20.0 MHz BAND WIDTH)

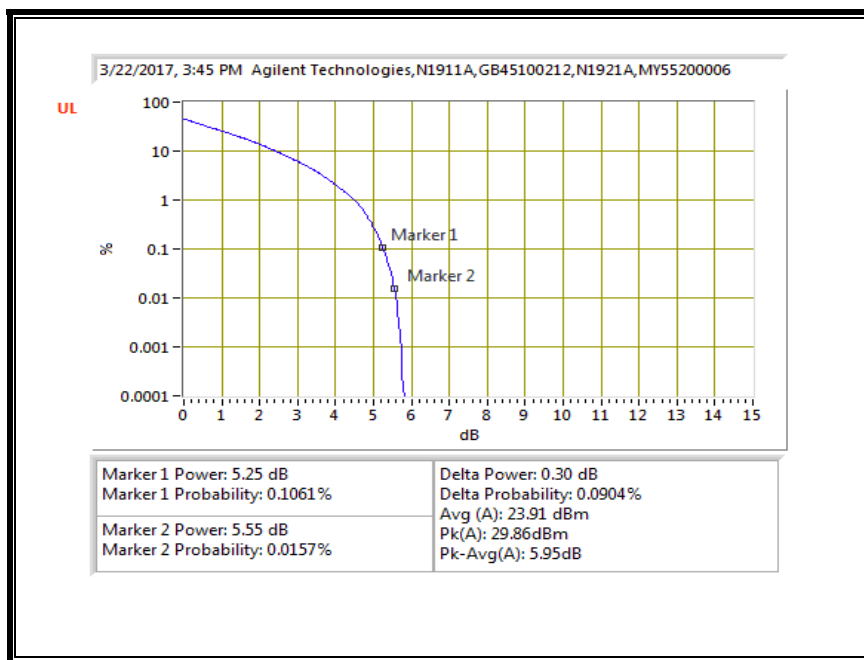

16QAM, (20.0 MHz BAND WIDTH)

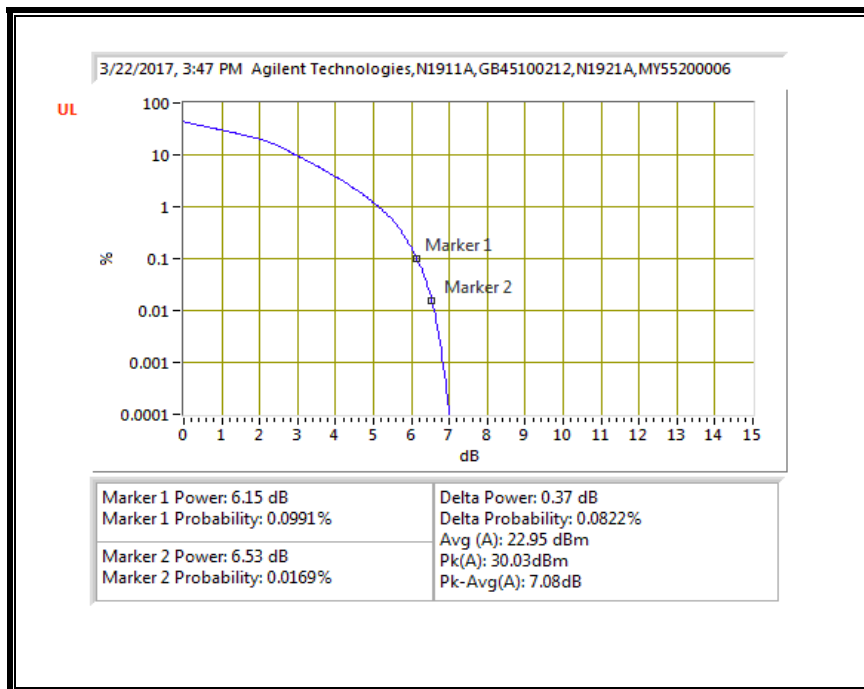

9. RADIATED TEST RESULTS

9.1. FIELD STRENGTH OF SPURIOUS RADIATION, LAT 1

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53, §90.691

LIMIT

FCC: §22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53 (g) For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

FCC: §27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

FCC: §90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 17
- LTE Band 25
- LTE Band 26
- LTE Band 30
- LTE Band 41
- LTE Band 66

RESULTS

9.1.1. LTE BAND 2

QPSK LTE BAND 2 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/06/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 2, 20MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1860MHz)										
3.72	-62.6	H	3.0	-12.6	38.6	1.0	-50.2	-13.0	-37.2	
5.58	-62.9	H	3.0	-8.8	38.6	1.0	-46.3	-13.0	-33.3	
7.44	-65.0	H	3.0	-7.3	37.8	1.0	-44.1	-13.0	-31.1	
3.72	-62.4	V	3.0	-12.4	38.6	1.0	-50.1	-13.0	-37.1	
5.58	-63.5	V	3.0	-9.7	38.6	1.0	-47.2	-13.0	-34.2	
7.44	-65.4	V	3.0	-7.9	37.8	1.0	-44.7	-13.0	-31.7	
Mid Channel (1880MHz)										
3.76	-62.1	H	3.0	-12.0	38.6	1.0	-49.6	-13.0	-36.6	
5.64	-63.2	H	3.0	-8.9	38.5	1.0	-46.5	-13.0	-33.5	
7.52	-64.6	H	3.0	-6.7	37.7	1.0	-43.5	-13.0	-30.5	
3.76	-61.3	V	3.0	-11.2	38.6	1.0	-48.8	-13.0	-35.8	
5.64	-64.2	V	3.0	-10.2	38.5	1.0	-47.8	-13.0	-34.8	
7.52	-63.2	V	3.0	-5.6	37.7	1.0	-42.3	-13.0	-29.3	
High Channel (1900MHz)										
3.80	-62.4	H	3.0	-12.2	38.6	1.0	-49.9	-13.0	-36.9	
5.70	-63.4	H	3.0	-9.0	38.5	1.0	-46.5	-13.0	-33.5	
7.60	-65.2	H	3.0	-7.3	37.7	1.0	-44.0	-13.0	-31.0	
3.80	-59.8	V	3.0	-9.6	38.6	1.0	-47.3	-13.0	-34.3	
5.70	-64.0	V	3.0	-9.9	38.5	1.0	-47.4	-13.0	-34.4	
7.60	-65.3	V	3.0	-7.5	37.7	1.0	-44.2	-13.0	-31.2	

Rev. 05.21.15

16QAM LTE BAND 2 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/06/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 2, 20MHz 16QAM

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1860MHz)										
3.72	-62.5	H	3.0	-12.5	38.6	1.0	-50.1	-13.0	-37.1	
5.58	-64.3	H	3.0	-10.2	38.6	1.0	-47.8	-13.0	-34.8	
7.44	-64.6	H	3.0	-6.9	37.8	1.0	-43.7	-13.0	-30.7	
3.72	-62.3	V	3.0	-12.4	38.6	1.0	-50.0	-13.0	-37.0	
5.58	-63.9	V	3.0	-10.1	38.6	1.0	-47.7	-13.0	-34.7	
7.44	-64.9	V	3.0	-7.4	37.8	1.0	-44.2	-13.0	-31.2	
Mid Channel (1880MHz)										
3.76	-62.4	H	3.0	-12.3	38.6	1.0	-49.9	-13.0	-36.9	
5.64	-64.4	H	3.0	-10.2	38.5	1.0	-47.7	-13.0	-34.7	
7.52	-65.2	H	3.0	-7.3	37.7	1.0	-44.1	-13.0	-31.1	
3.76	-62.3	V	3.0	-12.2	38.6	1.0	-49.8	-13.0	-36.8	
5.64	-63.5	V	3.0	-9.6	38.5	1.0	-47.1	-13.0	-34.1	
7.52	-63.9	V	3.0	-6.3	37.7	1.0	-43.0	-13.0	-30.0	
High Channel (1900MHz)										
3.80	-61.8	H	3.0	-11.6	38.6	1.0	-49.3	-13.0	-36.3	
5.70	-63.9	H	3.0	-9.5	38.5	1.0	-47.0	-13.0	-34.0	
7.60	-64.8	H	3.0	-6.9	37.7	1.0	-43.6	-13.0	-30.6	
3.80	-57.6	V	3.0	-7.5	38.6	1.0	-45.1	-13.0	-32.1	
5.70	-63.6	V	3.0	-9.6	38.5	1.0	-47.1	-13.0	-34.1	
7.60	-64.6	V	3.0	-6.9	37.7	1.0	-43.6	-13.0	-30.6	

Rev. 05.21.15

9.1.2. LTE BAND 4

QPSK LTE BAND 4 (3.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 05/12/17
Test Engineer: 10641
Configuration: EUT Only
Mode: LTE Band 4, 3MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1720MHz)										
3.44	-65.9	H	3.0	-16.6	38.5	1.0	-54.1	-13.0	-41.1	
5.16	-64.4	H	3.0	-11.2	38.7	1.0	-48.9	-13.0	-35.9	
6.88	-66.2	H	3.0	-9.3	38.1	1.0	-46.4	-13.0	-33.4	
3.44	-66.3	V	3.0	-17.2	38.5	1.0	-54.7	-13.0	-41.7	
5.16	-65.4	V	3.0	-12.6	38.7	1.0	-50.2	-13.0	-37.2	
6.88	-65.3	V	3.0	-8.6	38.1	1.0	-45.7	-13.0	-32.7	
Mid Channel (1732.5MHz)										
3.47	-66.5	H	3.0	-17.1	38.5	1.0	-54.6	-13.0	-41.6	
5.20	-65.2	H	3.0	-11.9	38.7	1.0	-49.6	-13.0	-36.6	
6.93	-65.6	H	3.0	-8.5	38.1	1.0	-45.6	-13.0	-32.6	
3.47	-67.0	V	3.0	-17.8	38.5	1.0	-55.3	-13.0	-42.3	
5.20	-64.8	V	3.0	-11.9	38.7	1.0	-49.6	-13.0	-36.6	
6.93	-66.4	V	3.0	-9.6	38.1	1.0	-46.7	-13.0	-33.7	
High Channel (1745MHz)										
3.49	-65.4	H	3.0	-16.0	38.5	1.0	-53.5	-13.0	-40.5	
5.24	-64.2	H	3.0	-10.9	38.7	1.0	-48.5	-13.0	-35.5	
6.98	-64.8	H	3.0	-7.7	38.1	1.0	-44.8	-13.0	-31.8	
3.49	-66.4	V	3.0	-17.1	38.5	1.0	-54.6	-13.0	-41.6	
5.24	-65.3	V	3.0	-12.3	38.7	1.0	-49.9	-13.0	-36.9	
6.98	-66.1	V	3.0	-9.2	38.1	1.0	-46.3	-13.0	-33.3	

Rev. 05.21.15

16QAM LTE BAND 4 (3.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 05/12/17 Test Engineer: 10641 Configuration: EUT Only Mode: LTE Band 4, 3MHz 16QAM										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		EIRP				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1720MHz)										
3.44	-65.6	H	3.0	-16.3	38.5	1.0	-53.8	-13.0	-40.8	
5.16	-65.1	H	3.0	-11.9	38.7	1.0	-49.6	-13.0	-36.6	
6.88	-64.8	H	3.0	-7.8	38.1	1.0	-45.0	-13.0	-32.0	
3.44	-64.9	V	3.0	-15.7	38.5	1.0	-53.3	-13.0	-40.3	
5.16	-65.2	V	3.0	-12.3	38.7	1.0	-50.0	-13.0	-37.0	
6.88	-66.3	V	3.0	-9.7	38.1	1.0	-46.8	-13.0	-33.8	
Mid Channel (1732.5MHz)										
3.47	-66.0	H	3.0	-16.7	38.5	1.0	-54.2	-13.0	-41.2	
5.20	-65.4	H	3.0	-12.1	38.7	1.0	-49.8	-13.0	-36.8	
6.93	-65.9	H	3.0	-8.8	38.1	1.0	-45.9	-13.0	-32.9	
3.47	-67.3	V	3.0	-18.1	38.5	1.0	-55.7	-13.0	-42.7	
5.20	-65.8	V	3.0	-12.8	38.7	1.0	-50.5	-13.0	-37.5	
6.93	-66.7	V	3.0	-9.9	38.1	1.0	-47.0	-13.0	-34.0	
High Channel (1745MHz)										
3.49	-66.8	H	3.0	-17.4	38.5	1.0	-54.9	-13.0	-41.9	
5.24	-65.3	H	3.0	-11.9	38.7	1.0	-49.6	-13.0	-36.6	
6.98	-66.5	H	3.0	-9.3	38.1	1.0	-46.4	-13.0	-33.4	
3.49	-66.0	V	3.0	-16.7	38.5	1.0	-54.2	-13.0	-41.2	
5.24	-64.9	V	3.0	-11.9	38.7	1.0	-49.6	-13.0	-36.6	
6.98	-65.7	V	3.0	-8.8	38.1	1.0	-45.9	-13.0	-32.9	
Rev. 05.21.15										

9.1.3. LTE BAND 5

QPSK LTE BAND 5 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/08/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 5, 10MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber F

Pre-amplifier
 3m Chamber F

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (829MHz)										
1.66	-67.0	H	3.0	-25.8	33.7	1.0	-58.5	-13.0	-45.5	
2.49	-66.4	H	3.0	-22.3	34.1	1.0	-55.4	-13.0	-42.4	
3.32	-65.3	H	3.0	-17.0	34.6	1.0	-50.7	-13.0	-37.7	
1.66	-66.4	V	3.0	-23.0	33.7	1.0	-55.7	-13.0	-42.7	
2.49	-65.2	V	3.0	-20.4	34.1	1.0	-53.5	-13.0	-40.5	
3.32	-65.5	V	3.0	-17.0	34.6	1.0	-50.6	-13.0	-37.6	
Mid Channel (836.5MHz)										
1.67	-66.4	H	3.0	-25.1	33.7	1.0	-57.8	-13.0	-44.8	
2.51	-64.3	H	3.0	-20.1	34.1	1.0	-53.2	-13.0	-40.2	
3.35	-65.5	H	3.0	-17.1	34.6	1.0	-50.7	-13.0	-37.7	
1.67	-66.5	V	3.0	-23.1	33.7	1.0	-55.8	-13.0	-42.8	
2.51	-65.6	V	3.0	-20.8	34.1	1.0	-53.9	-13.0	-40.9	
3.35	-64.7	V	3.0	-16.1	34.6	1.0	-49.7	-13.0	-36.7	
High Channel (844MHz)										
1.69	-65.5	H	3.0	-24.0	33.7	1.0	-56.7	-13.0	-43.7	
2.53	-65.6	H	3.0	-21.2	34.1	1.0	-54.4	-13.0	-41.4	
3.38	-65.0	H	3.0	-16.5	34.6	1.0	-50.1	-13.0	-37.1	
1.69	-65.6	V	3.0	-22.2	33.7	1.0	-54.8	-13.0	-41.8	
2.53	-66.4	V	3.0	-21.5	34.1	1.0	-54.6	-13.0	-41.6	
3.38	-65.9	V	3.0	-17.2	34.6	1.0	-50.8	-13.0	-37.8	

Rev. 05.21.15

16QAM LTE BAND 5 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: Date: 04/08/17 Test Engineer: 40813 Configuration: EUT Only Mode: LTE Band 5, 10MHz 16QAM											
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable											
Chamber			Pre-amplifier			Filter			Limit		
3m Chamber F			3m Chamber F			Filter			EIRP		
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Low Channel (829MHz)											
1.66	-67.0	H	3.0	-25.5	33.7	1.0	-58.2	-13.0	-45.2		
2.49	-65.3	H	3.0	-22.2	34.1	1.0	-55.3	-13.0	-42.3		
3.32	-65.1	H	3.0	-19.2	34.6	1.0	-52.8	-13.0	-39.8		
1.66	-66.6	V	3.0	-24.9	33.7	1.0	-57.6	-13.0	-44.6		
2.49	-64.8	V	3.0	-20.7	34.1	1.0	-53.8	-13.0	-40.8		
3.32	-65.5	V	3.0	-19.6	34.6	1.0	-53.2	-13.0	-40.2		
Mid Channel (836.5MHz)											
1.67	-65.3	H	3.0	-23.8	33.7	1.0	-56.5	-13.0	-43.5		
2.51	-66.3	H	3.0	-23.1	34.1	1.0	-56.2	-13.0	-43.2		
3.35	-65.1	H	3.0	-19.1	34.6	1.0	-52.7	-13.0	-39.7		
1.67	-64.9	V	3.0	-23.1	33.7	1.0	-55.8	-13.0	-42.8		
2.51	-65.8	V	3.0	-21.6	34.1	1.0	-54.7	-13.0	-41.7		
3.35	-64.8	V	3.0	-18.8	34.6	1.0	-52.4	-13.0	-39.4		
High Channel (844MHz)											
1.69	-65.5	H	3.0	-24.0	33.7	1.0	-56.6	-13.0	-43.6		
2.53	-65.4	H	3.0	-22.1	34.1	1.0	-55.2	-13.0	-42.2		
3.38	-65.3	H	3.0	-19.3	34.6	1.0	-52.9	-13.0	-39.9		
1.69	-66.1	V	3.0	-24.3	33.7	1.0	-57.0	-13.0	-44.0		
2.53	-65.5	V	3.0	-21.3	34.1	1.0	-54.4	-13.0	-41.4		
3.38	-65.6	V	3.0	-19.5	34.6	1.0	-53.1	-13.0	-40.1		
Rev. 05.21.15											

9.1.4. LTE BAND 7

QPSK LTE BAND 7 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/07/17
Test Engineer: 39004
Configuration: EUT Only
Mode: LTE Band 7, 20MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)										
5.02	-64.0	H	3.0	-11.1	38.7	1.0	-48.7	-25.0	-23.7	
7.53	-66.1	H	3.0	-8.2	37.7	1.0	-45.0	-25.0	-20.0	
10.04	-65.2	H	3.0	-4.3	36.2	1.0	-39.5	-25.0	-14.5	
5.02	-63.8	V	3.0	-11.2	38.7	1.0	-48.9	-25.0	-23.9	
7.53	-66.5	V	3.0	-8.9	37.7	1.0	-45.6	-25.0	-20.6	
10.04	-66.7	V	3.0	-5.9	36.2	1.0	-41.1	-25.0	-16.1	
Mid Channel (2535MHz)										
5.07	-64.5	H	3.0	-11.5	38.7	1.0	-49.2	-25.0	-24.2	
7.61	-65.1	H	3.0	-7.1	37.7	1.0	-43.8	-25.0	-18.8	
10.14	-66.4	H	3.0	-5.5	36.2	1.0	-40.7	-25.0	-15.7	
5.07	-63.9	V	3.0	-11.2	38.7	1.0	-48.8	-25.0	-23.8	
7.61	-66.1	V	3.0	-8.4	37.7	1.0	-45.0	-25.0	-20.0	
10.14	-65.9	V	3.0	-4.9	36.2	1.0	-40.2	-25.0	-15.2	
High Channel (2560MHz)										
5.12	-63.6	H	3.0	-10.5	38.7	1.0	-48.2	-25.0	-23.2	
7.68	-64.9	H	3.0	-6.9	37.6	1.0	-43.5	-25.0	-18.5	
10.24	-65.9	H	3.0	-4.9	36.3	1.0	-40.1	-25.0	-15.1	
5.12	-63.9	V	3.0	-11.1	38.7	1.0	-48.8	-25.0	-23.8	
7.68	-65.6	V	3.0	-7.8	37.6	1.0	-44.5	-25.0	-19.5	
10.24	-65.9	V	3.0	-4.8	36.3	1.0	-40.1	-25.0	-15.1	

Rev. 05.21.15

16QAM LTE BAND 7 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/07/17
Test Engineer: 39004
Configuration: EUT Only
Mode: LTE Band 7, 20MHz 16QAM

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)										
5.02	-64.5	H	3.0	-11.6	38.7	1.0	-49.3	-25.0	-24.3	
7.53	-66.1	H	3.0	-8.3	37.7	1.0	-45.0	-25.0	-20.0	
10.04	-65.2	H	3.0	-4.4	36.2	1.0	-39.6	-25.0	-14.6	
5.02	-63.9	V	3.0	-11.3	38.7	1.0	-49.0	-25.0	-24.0	
7.53	-66.6	V	3.0	-9.0	37.7	1.0	-45.8	-25.0	-20.8	
10.04	-66.6	V	3.0	-5.7	36.2	1.0	-40.9	-25.0	-15.9	
Mid Channel (2535MHz)										
5.07	-64.4	H	3.0	-11.3	38.7	1.0	-49.0	-25.0	-24.0	
7.61	-65.2	H	3.0	-7.3	37.7	1.0	-44.0	-25.0	-19.0	
10.14	-66.3	H	3.0	-5.4	36.2	1.0	-40.6	-25.0	-15.6	
5.07	-64.0	V	3.0	-11.2	38.7	1.0	-48.9	-25.0	-23.9	
7.61	-66.2	V	3.0	-8.5	37.7	1.0	-45.1	-25.0	-20.1	
10.14	-65.5	V	3.0	-4.6	36.2	1.0	-39.8	-25.0	-14.8	
High Channel (2560MHz)										
5.12	-63.5	H	3.0	-10.4	38.7	1.0	-48.1	-25.0	-23.1	
7.68	-65.0	H	3.0	-7.0	37.6	1.0	-43.6	-25.0	-18.6	
10.24	-65.8	H	3.0	-4.8	36.3	1.0	-40.1	-25.0	-15.1	
5.12	-63.8	V	3.0	-11.0	38.7	1.0	-48.7	-25.0	-23.7	
7.68	-65.7	V	3.0	-7.9	37.6	1.0	-44.5	-25.0	-19.5	
10.24	-65.8	V	3.0	-4.8	36.3	1.0	-40.1	-25.0	-15.1	

Rev. 05.21.15

9.1.5. LTE BAND 12

QPSK LTE BAND 12 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/08/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 12, 10MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber F

Pre-amplifier
 3m Chamber F

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (704MHz)										
1.41	-66.5	H	3.0	-26.8	34.0	1.0	-59.9	-13.0	-46.9	
2.11	-65.6	H	3.0	-21.9	33.7	1.0	-54.6	-13.0	-41.6	
2.82	-65.3	H	3.0	-19.3	34.5	1.0	-52.8	-13.0	-39.8	
1.41	-66.8	V	3.0	-24.3	34.0	1.0	-57.3	-13.0	-44.3	
2.11	-66.2	V	3.0	-22.3	33.7	1.0	-54.9	-13.0	-41.9	
2.82	-65.6	V	3.0	-19.2	34.5	1.0	-52.7	-13.0	-39.7	
Mid Channel (707.5MHz)										
1.42	-66.4	H	3.0	-26.6	34.0	1.0	-59.7	-13.0	-46.7	
2.12	-65.8	H	3.0	-22.2	33.7	1.0	-54.8	-13.0	-41.8	
2.83	-65.4	H	3.0	-19.3	34.6	1.0	-52.9	-13.0	-39.9	
1.42	-66.5	V	3.0	-24.0	34.0	1.0	-57.0	-13.0	-44.0	
2.12	-66.3	V	3.0	-22.4	33.7	1.0	-55.0	-13.0	-42.0	
2.83	-65.8	V	3.0	-19.3	34.6	1.0	-52.8	-13.0	-39.8	
High Channel (711MHz)										
1.42	-65.1	H	3.0	-25.3	34.0	1.0	-58.3	-13.0	-45.3	
2.13	-65.4	H	3.0	-21.8	33.7	1.0	-54.5	-13.0	-41.5	
2.84	-65.5	H	3.0	-19.3	34.6	1.0	-52.9	-13.0	-39.9	
1.42	-65.8	V	3.0	-23.2	34.0	1.0	-56.2	-13.0	-43.2	
2.13	-65.9	V	3.0	-22.0	33.7	1.0	-54.7	-13.0	-41.7	
2.84	-65.4	V	3.0	-18.8	34.6	1.0	-52.3	-13.0	-39.3	

Rev. 05.21.15

16QAM LTE BAND 12 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/08/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 12, 10MHz 16QAM

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber F

Pre-amplifier
 3m Chamber F

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (704MHz)										
1.41	-65.4	H	3.0	-25.7	34.0	1.0	-58.8	-13.0	-45.8	
2.11	-65.1	H	3.0	-21.4	33.7	1.0	-54.1	-13.0	-41.1	
2.82	-64.6	H	3.0	-18.5	34.5	1.0	-52.1	-13.0	-39.1	
1.41	-65.8	V	3.0	-23.3	34.0	1.0	-56.4	-13.0	-43.4	
2.11	-66.2	V	3.0	-22.4	33.7	1.0	-55.0	-13.0	-42.0	
2.82	-65.2	V	3.0	-18.7	34.5	1.0	-52.3	-13.0	-39.3	
Mid Channel (707.5MHz)										
1.42	-65.7	H	3.0	-26.0	34.0	1.0	-59.0	-13.0	-46.0	
2.12	-65.5	H	3.0	-21.8	33.7	1.0	-54.5	-13.0	-41.5	
2.83	-64.5	H	3.0	-18.4	34.6	1.0	-51.9	-13.0	-38.9	
1.42	-66.0	V	3.0	-23.4	34.0	1.0	-56.4	-13.0	-43.4	
2.12	-65.4	V	3.0	-21.5	33.7	1.0	-54.2	-13.0	-41.2	
2.83	-65.6	V	3.0	-19.1	34.6	1.0	-52.7	-13.0	-39.7	
High Channel (711MHz)										
1.42	-66.1	H	3.0	-26.3	34.0	1.0	-59.3	-13.0	-46.3	
2.13	-65.6	H	3.0	-21.9	33.7	1.0	-54.6	-13.0	-41.6	
2.84	-64.8	H	3.0	-18.6	34.6	1.0	-52.2	-13.0	-39.2	
1.42	-66.1	V	3.0	-23.5	34.0	1.0	-56.5	-13.0	-43.5	
2.13	-65.9	V	3.0	-21.9	33.7	1.0	-54.6	-13.0	-41.6	
2.84	-65.1	V	3.0	-18.5	34.6	1.0	-52.1	-13.0	-39.1	

Rev. 05.21.15

9.1.6. LTE BAND 13

QPSK LTE BAND 13 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: Date: 04/08/17 Test Engineer: 40813 Configuration: EUT Only Mode: LTE Band 13, 10MHz QPSK											
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable											
Chamber			Pre-amplifier			Filter			Limit		
3m Chamber F			3m Chamber F			Filter			LTE B13		
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Mid Channel (782MHz)											
1.56	-65.6	H	3.0	-25.0	33.8	1.0	-57.7	-40.0	-17.7		
2.35	-65.7	H	3.0	-21.8	34.1	1.0	-54.9	-13.0	-41.9		
3.13	-64.5	H	3.0	-16.9	34.8	1.0	-50.6	-13.0	-37.6		
1.56	-65.8	V	3.0	-22.5	33.8	1.0	-55.2	-40.0	-15.2		
2.35	-65.2	V	3.0	-20.7	34.1	1.0	-53.8	-13.0	-40.8		
3.13	-65.7	V	3.0	-17.8	34.8	1.0	-51.5	-13.0	-38.5		
Rev. 05.21.15											

16QAM LTE BAND 13 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/08/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 13, 10MHz 16QAM

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber F

Pre-amplifier

3m Chamber F

Filter

Filter

Limit

LTE B13

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Mid Channel (782MHz)										
1.56	-65.3	H	3.0	-24.7	33.8	1.0	-57.5	-40.0	-17.5	
2.35	-65.4	H	3.0	-21.5	34.1	1.0	-54.6	-13.0	-41.6	
3.13	-65.0	H	3.0	-17.4	34.8	1.0	-51.1	-13.0	-38.1	
1.56	-66.1	V	3.0	-22.8	33.8	1.0	-55.5	-40.0	-15.5	
2.35	-65.5	V	3.0	-20.9	34.1	1.0	-54.0	-13.0	-41.0	
3.13	-64.9	V	3.0	-17.0	34.8	1.0	-50.7	-13.0	-37.7	

Rev. 05.21.15

9.1.7. LTE BAND 17

QPSK LTE BAND 17 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 07/21/17
Test Engineer: 10641
Configuration: EUT Only
Mode: LTE Band 17, 10MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (709MHz)										
1.418	-63.9	H	3.0	-22.2	38.0	1.0	-59.2	-13.0	-46.2	
2.127	-65.6	H	3.0	-22.0	38.0	1.0	-59.0	-13.0	-46.0	
2.836	-65.4	H	3.0	-18.2	38.4	1.0	-55.7	-13.0	-42.7	
1.418	-63.9	V	3.0	-22.9	38.0	1.0	-60.0	-13.0	-47.0	
2.127	-65.3	V	3.0	-21.1	38.0	1.0	-58.1	-13.0	-45.1	
2.836	-65.3	V	3.0	-18.3	38.4	1.0	-55.8	-13.0	-42.8	
Mid Channel (710MHz)										
1.420	-66.7	H	3.0	-25.0	38.0	1.0	-62.0	-13.0	-49.0	
2.130	-66.1	H	3.0	-22.5	38.0	1.0	-59.5	-13.0	-46.5	
2.840	-66.6	H	3.0	-19.3	38.4	1.0	-56.8	-13.0	-43.8	
1.420	-66.7	V	3.0	-25.7	38.0	1.0	-62.8	-13.0	-49.8	
2.130	-66.1	V	3.0	-22.0	38.0	1.0	-59.0	-13.0	-46.0	
2.840	-66.6	V	3.0	-19.6	38.4	1.0	-57.0	-13.0	-44.0	
High Channel (711MHz)										
1.422	-63.9	H	3.0	-22.2	38.0	1.0	-59.2	-13.0	-46.2	
2.133	-66.1	H	3.0	-20.7	38.0	1.0	-57.7	-13.0	-44.7	
2.844	-65.1	H	3.0	-17.9	38.4	1.0	-55.3	-13.0	-42.3	
1.422	-64.2	V	3.0	-23.2	38.0	1.0	-60.2	-13.0	-47.2	
2.133	-63.6	V	3.0	-19.4	38.0	1.0	-56.4	-13.0	-43.4	
2.844	-65.6	V	3.0	-18.6	38.4	1.0	-56.0	-13.0	-43.0	

Rev. 05.21.15

16QAM LTE BAND 17 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 07/21/17 Test Engineer: 10641 Configuration: EUT Only Mode: LTE Band 17, 10MHz 16QAM										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		EIRP				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (709MHz)										
1.418	-63.7	H	3.0	-22.0	38.0	1.0	-59.1	-13.0	-46.1	
2.127	-65.0	H	3.0	-21.4	38.0	1.0	-58.4	-13.0	-45.4	
2.836	-65.2	H	3.0	-18.0	38.4	1.0	-55.4	-13.0	-42.4	
1.418	-64.3	V	3.0	-23.3	38.0	1.0	-60.4	-13.0	-47.4	
2.127	-64.8	V	3.0	-20.6	38.0	1.0	-57.6	-13.0	-44.6	
2.836	-63.8	V	3.0	-16.8	38.4	1.0	-54.2	-13.0	-41.2	
Mid Channel (710MHz)										
1.420	-67.5	H	3.0	-25.8	38.0	1.0	-62.9	-13.0	-49.9	
2.130	-66.8	H	3.0	-23.2	38.0	1.0	-60.2	-13.0	-47.2	
2.840	-66.7	H	3.0	-19.5	38.4	1.0	-56.9	-13.0	-43.9	
1.420	-67.8	V	3.0	-26.8	38.0	1.0	-63.9	-13.0	-50.9	
2.130	-67.0	V	3.0	-22.9	38.0	1.0	-59.9	-13.0	-46.9	
2.840	-66.6	V	3.0	-19.6	38.4	1.0	-57.0	-13.0	-44.0	
High Channel (711MHz)										
1.422	-64.0	H	3.0	-22.3	38.0	1.0	-59.3	-13.0	-46.3	
2.133	-65.1	H	3.0	-21.4	38.0	1.0	-58.4	-13.0	-45.4	
2.844	-66.0	H	3.0	-18.7	38.4	1.0	-56.2	-13.0	-43.2	
1.422	-63.5	V	3.0	-22.5	38.0	1.0	-59.5	-13.0	-46.5	
2.133	-64.6	V	3.0	-20.4	38.0	1.0	-57.4	-13.0	-44.4	
2.844	-65.7	V	3.0	-18.6	38.4	1.0	-56.1	-13.0	-43.1	
Rev. 05.21.15										

9.1.8. LTE BAND 25

QPSK LTE BAND 25 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/06/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 25, 20MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1860MHz)										
3.72	-62.6	H	3.0	-12.6	38.6	1.0	-50.2	-13.0	-37.2	
5.58	-63.7	H	3.0	-9.6	38.6	1.0	-47.2	-13.0	-34.2	
7.44	-63.5	H	3.0	-5.8	37.8	1.0	-42.6	-13.0	-29.6	
3.72	-62.3	H	3.0	-12.3	38.6	1.0	-49.9	-13.0	-36.9	
5.58	-64.0	H	3.0	-9.9	38.6	1.0	-47.5	-13.0	-34.5	
7.44	-64.5	V	3.0	-7.0	37.8	1.0	-43.8	-13.0	-30.8	
Mid Channel (1882.5MHz)										
3.77	-62.0	H	3.0	-11.9	38.6	1.0	-49.5	-13.0	-36.5	
5.65	-64.1	H	3.0	-9.9	38.5	1.0	-47.4	-13.0	-34.4	
7.53	-65.3	H	3.0	-7.5	37.7	1.0	-44.2	-13.0	-31.2	
3.77	-62.4	V	3.0	-12.3	38.6	1.0	-50.0	-13.0	-37.0	
5.65	-63.3	V	3.0	-9.3	38.5	1.0	-46.9	-13.0	-33.9	
7.53	-65.7	V	3.0	-8.1	37.7	1.0	-44.8	-13.0	-31.8	
High Channel (1905MHz)										
3.81	-62.3	H	3.0	-12.0	38.6	1.0	-49.7	-13.0	-36.7	
5.72	-64.1	H	3.0	-9.7	38.5	1.0	-47.2	-13.0	-34.2	
7.62	-65.6	H	3.0	-7.7	37.7	1.0	-44.3	-13.0	-31.3	
3.81	-62.4	V	3.0	-12.2	38.6	1.0	-49.8	-13.0	-36.8	
5.72	-64.2	V	3.0	-10.1	38.5	1.0	-47.7	-13.0	-34.7	
7.62	-64.8	V	3.0	-7.1	37.7	1.0	-43.7	-13.0	-30.7	

Rev. 05.21.15

16QAM LTE BAND 25 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:

Project #:

Date: 04/06/17

Test Engineer: 40813

Configuration: EUT Only

Mode: LTE Band 25, 20MHz 16QAM

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1860MHz)										
3.72	-62.6	H	3.0	-12.6	38.6	1.0	-50.2	-13.0	-37.2	
5.58	-64.0	H	3.0	-9.9	38.6	1.0	-47.4	-13.0	-34.4	
7.44	-65.3	H	3.0	-7.6	37.8	1.0	-44.3	-13.0	-31.3	
3.72	-62.3	V	3.0	-12.4	38.6	1.0	-50.0	-13.0	-37.0	
5.58	-64.1	V	3.0	-10.3	38.6	1.0	-47.8	-13.0	-34.8	
7.44	-65.2	V	3.0	-7.6	37.8	1.0	-44.4	-13.0	-31.4	
Mid Channel (1882.5MHz)										
3.77	-61.8	H	3.0	-11.6	38.6	1.0	-49.3	-13.0	-36.3	
5.65	-64.6	H	3.0	-10.4	38.5	1.0	-47.9	-13.0	-34.9	
7.53	-65.3	H	3.0	-7.5	37.7	1.0	-44.2	-13.0	-31.2	
3.77	-62.3	V	3.0	-12.2	38.6	1.0	-49.8	-13.0	-36.8	
5.65	-64.7	V	3.0	-10.7	38.5	1.0	-48.2	-13.0	-35.2	
7.53	-65.6	V	3.0	-8.0	37.7	1.0	-44.8	-13.0	-31.8	
High Channel (1905MHz)										
3.81	-62.2	H	3.0	-11.9	38.6	1.0	-49.6	-13.0	-36.6	
5.72	-64.3	H	3.0	-9.9	38.5	1.0	-47.4	-13.0	-34.4	
7.62	-65.3	H	3.0	-7.3	37.7	1.0	-44.0	-13.0	-31.0	
3.81	-62.8	V	3.0	-12.6	38.6	1.0	-50.3	-13.0	-37.3	
5.72	-63.9	V	3.0	-9.8	38.5	1.0	-47.4	-13.0	-34.4	
7.62	-65.2	V	3.0	-7.4	37.7	1.0	-44.1	-13.0	-31.1	

Rev. 05.21.15

9.1.9. LTE BAND 26

QPSK LTE BAND 26 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/08/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 26 (90S), 10MHz QPSK

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber F

Pre-amplifier

3m Chamber F

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Mid Channel (819MHz)										
1.64	-67.1	H	3.0	-26.0	33.7	1.0	-58.8	-13.0	-45.8	
2.46	-67.3	H	3.0	-23.2	34.1	1.0	-56.4	-13.0	-43.4	
3.28	-67.4	H	3.0	-19.3	34.7	1.0	-53.0	-13.0	-40.0	
1.64	-67.5	V	3.0	-24.1	33.7	1.0	-56.8	-13.0	-43.8	
2.46	-66.9	V	3.0	-22.1	34.1	1.0	-55.3	-13.0	-42.3	
3.28	-65.9	V	3.0	-17.5	34.7	1.0	-51.2	-13.0	-38.2	

Rev. 05.21.15

16QAM LTE BAND 26 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:

Project #:

Date: 04/08/17

Test Engineer: 40813

Configuration: EUT Only

Mode: LTE Band 26 (90S), 10MHz 16QAM

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber F

Pre-amplifier

3m Chamber F

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Mid Channel (819MHz)										
1.64	-67.8	H	3.0	-26.7	33.7	1.0	-59.4	-13.0	-46.4	
2.46	-66.6	H	3.0	-22.5	34.1	1.0	-55.6	-13.0	-42.6	
3.28	-65.5	H	3.0	-17.4	34.7	1.0	-51.1	-13.0	-38.1	
1.64	-67.0	V	3.0	-23.6	33.7	1.0	-56.4	-13.0	-43.4	
2.46	-66.4	V	3.0	-21.7	34.1	1.0	-54.8	-13.0	-41.8	
3.28	-65.8	V	3.0	-17.4	34.7	1.0	-51.1	-13.0	-38.1	

Rev. 05.21.15

9.1.10. LTE BAND 30

QPSK LTE BAND 30 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 04/07/17 Test Engineer: 39004 Configuration: EUT only Mode: LTE Band 30, 10MHz QPSK										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		LTE B30				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Mid Channel (2310MHz)										
4.62	-66.4	H	3.0	-12.6	37.9	1.0	-49.6	-40.0	-9.6	
6.93	-68.3	H	3.0	-9.7	36.5	1.0	-45.1	-40.0	-5.1	
9.24	-70.9	H	3.0	-9.3	34.9	1.0	-43.2	-40.0	-3.2	
4.62	-67.0	V	3.0	-13.3	37.9	1.0	-50.2	-40.0	-10.2	
6.93	-68.8	V	3.0	-9.4	36.5	1.0	-44.8	-40.0	-4.8	
9.24	-71.4	V	3.0	-9.6	34.9	1.0	-43.4	-40.0	-3.4	
Rev. 05.21.15										

16QAM LTE BAND 30 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 04/07/17 Test Engineer: 39004 Configuration: EUT only Mode: LTE Band 30, 10MHz 16QAM										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		LTE B30				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Mid Channel (2310MHz)										
4.62	-66.5	H	3.0	-12.7	37.9	1.0	-49.7	-40.0	-9.7	
6.93	-68.2	H	3.0	-9.6	36.5	1.0	-45.0	-40.0	-5.0	
9.24	-70.7	H	3.0	-9.2	34.9	1.0	-43.1	-40.0	-3.1	
4.62	-67.0	V	3.0	-13.3	37.9	1.0	-50.2	-40.0	-10.2	
6.93	-68.8	V	3.0	-9.3	36.5	1.0	-44.7	-40.0	-4.7	
9.24	-71.2	V	3.0	-9.4	34.9	1.0	-43.3	-40.0	-3.3	
Rev. 05.21.15										

9.1.11. LTE BAND 41

QPSK LTE BAND 41 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:

Project #:

Date: 04/12/17

Test Engineer: 40813

Configuration: EUT Only

Mode: LTE Band 41, 20MHz QPSK

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 LTE B41

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz)										
5.01	-64.3	H	3.0	-11.5	38.7	1.0	-49.2	-25.0	-24.2	
7.52	-66.5	H	3.0	-8.7	37.7	1.0	-45.5	-25.0	-20.5	
10.02	-66.7	H	3.0	-5.9	36.1	1.0	-41.0	-25.0	-16.0	
5.01	-62.7	V	3.0	-10.1	38.7	1.0	-47.8	-25.0	-22.8	
7.52	-65.7	V	3.0	-8.1	37.7	1.0	-44.8	-25.0	-19.8	
10.02	-66.7	V	3.0	-5.9	36.1	1.0	-41.1	-25.0	-16.1	
Mid Channel (2593MHz)										
5.19	-63.8	H	3.0	-10.6	38.7	1.0	-48.3	-25.0	-23.3	
7.78	-64.9	H	3.0	-6.8	37.6	1.0	-43.3	-25.0	-18.3	
10.37	-66.0	H	3.0	-4.9	36.4	1.0	-40.3	-25.0	-15.3	
5.19	-63.2	V	3.0	-10.3	38.7	1.0	-48.0	-25.0	-23.0	
7.78	-65.7	V	3.0	-7.8	37.6	1.0	-44.3	-25.0	-19.3	
10.37	-64.8	V	3.0	-3.7	36.4	1.0	-39.0	-25.0	-14.0	
High Channel (2680MHz)										
5.36	-64.8	H	3.0	-11.2	38.6	1.0	-48.8	-25.0	-23.8	
8.04	-66.0	H	3.0	-7.5	37.4	1.0	-43.9	-25.0	-18.9	
10.72	-66.2	H	3.0	-4.8	36.6	1.0	-40.4	-25.0	-15.4	
5.36	-63.5	V	3.0	-10.2	38.6	1.0	-47.8	-25.0	-22.8	
8.04	-65.8	V	3.0	-7.5	37.4	1.0	-43.9	-25.0	-18.9	
10.72	-66.0	V	3.0	-4.4	36.6	1.0	-40.0	-25.0	-15.0	

Rev. 05.21.15

Page 673 of 704

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4031B
 47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
 This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

16QAM LTE BAND 41 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: Date: 04/12/17 Test Engineer: 40813 Configuration: EUT Only Mode: LTE Band 41, 20MHz 16QAM											
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable											
Chamber		Pre-amplifier		Filter		Limit					
3m Chamber E		3m Chamber E		Filter		LTE B41					
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Low Channel (2506MHz)											
5.01	-63.9	H	3.0	-11.1	38.7	1.0	-48.8	-25.0	-23.8		
7.52	-65.8	H	3.0	-7.9	37.7	1.0	-44.7	-25.0	-19.7		
10.02	-65.3	H	3.0	-4.5	36.1	1.0	-39.7	-25.0	-14.7		
5.01	-63.8	V	3.0	-11.2	38.7	1.0	-48.9	-25.0	-23.9		
7.52	-65.3	V	3.0	-7.7	37.7	1.0	-44.5	-25.0	-19.5		
10.02	-65.8	V	3.0	-5.0	36.1	1.0	-40.1	-25.0	-15.1		
Mid Channel (2593MHz)											
5.19	-63.5	H	3.0	-10.3	38.7	1.0	-48.0	-25.0	-23.0		
7.78	-64.2	H	3.0	-6.0	37.6	1.0	-42.6	-25.0	-17.6		
10.37	-66.1	H	3.0	-4.9	36.4	1.0	-40.3	-25.0	-15.3		
5.19	-64.4	V	3.0	-11.5	38.7	1.0	-49.1	-25.0	-24.1		
7.78	-64.6	V	3.0	-6.7	37.6	1.0	-43.3	-25.0	-18.3		
10.37	-66.6	V	3.0	-5.4	36.4	1.0	-40.8	-25.0	-15.8		
High Channel (2680MHz)											
5.36	-63.4	H	3.0	-9.8	38.6	1.0	-47.4	-25.0	-22.4		
8.04	-65.2	H	3.0	-6.8	37.4	1.0	-43.2	-25.0	-18.2		
10.72	-65.1	H	3.0	-3.7	36.6	1.0	-39.3	-25.0	-14.3		
5.36	-63.7	V	3.0	-10.4	38.6	1.0	-48.0	-25.0	-23.0		
8.04	-65.7	V	3.0	-7.5	37.4	1.0	-43.9	-25.0	-18.9		
10.72	-65.6	V	3.0	-4.1	36.6	1.0	-39.7	-25.0	-14.7		
Rev. 05.21.15											

9.1.12. LTE BAND 66

QPSK LTE BAND 66 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/13/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 66, 20MHz QPSK

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1720.0MHz)										
3.44	-56.7	H	3.0	-7.4	38.5	1.0	-44.9	-13.0	-31.9	
5.16	-64.6	H	3.0	-11.4	38.7	1.0	-49.1	-13.0	-36.1	
6.88	-65.9	H	3.0	-9.0	38.1	1.0	-46.1	-13.0	-33.1	
3.44	-64.9	V	3.0	-15.8	38.5	1.0	-53.3	-13.0	-40.3	
5.16	-64.7	V	3.0	-11.8	38.7	1.0	-49.5	-13.0	-36.5	
6.88	-64.5	V	3.0	-7.9	38.1	1.0	-45.0	-13.0	-32.0	
Mid Channel (1745.0MHz)										
3.49	-57.7	H	3.0	-8.3	38.5	1.0	-45.8	-13.0	-32.8	
5.24	-65.2	H	3.0	-11.8	38.7	1.0	-49.5	-13.0	-36.5	
6.98	-66.1	H	3.0	-9.0	38.1	1.0	-46.1	-13.0	-33.1	
3.49	-64.5	V	3.0	-15.3	38.5	1.0	-52.8	-13.0	-39.8	
5.24	-65.8	V	3.0	-12.7	38.7	1.0	-50.4	-13.0	-37.4	
6.98	-66.2	V	3.0	-9.3	38.1	1.0	-46.4	-13.0	-33.4	
High Channel (1770.0MHz)										
3.54	-59.3	H	3.0	-9.8	38.6	1.0	-47.3	-13.0	-34.3	
5.31	-65.3	H	3.0	-11.8	38.6	1.0	-49.4	-13.0	-36.4	
7.08	-64.3	H	3.0	-7.0	38.0	1.0	-44.0	-13.0	-31.0	
3.54	-64.8	V	3.0	-15.4	38.6	1.0	-53.0	-13.0	-40.0	
5.31	-65.1	V	3.0	-11.9	38.6	1.0	-49.6	-13.0	-36.6	
7.08	-63.7	V	3.0	-6.7	38.0	1.0	-43.7	-13.0	-30.7	

Rev. 02.24.17

16QAM LTE BAND 66 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/13/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 66, 20MHz 16QAM

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1720.0MHz)										
3.44	-55.7	H	3.0	-6.4	38.5	1.0	-44.0	-13.0	-31.0	
5.16	-65.3	H	3.0	-12.1	38.7	1.0	-49.8	-13.0	-36.8	
6.88	-66.2	H	3.0	-9.3	38.1	1.0	-46.4	-13.0	-33.4	
3.44	-65.1	V	3.0	-16.0	38.5	1.0	-53.5	-13.0	-40.5	
5.16	-62.9	V	3.0	-10.0	38.7	1.0	-47.7	-13.0	-34.7	
6.88	-64.1	V	3.0	-7.4	38.1	1.0	-44.5	-13.0	-31.5	
Mid Channel (1745.0MHz)										
3.49	-59.1	H	3.0	-9.7	38.5	1.0	-47.2	-13.0	-34.2	
5.24	-64.7	H	3.0	-11.4	38.7	1.0	-49.0	-13.0	-36.0	
6.98	-66.3	H	3.0	-9.2	38.1	1.0	-46.3	-13.0	-33.3	
3.49	-64.2	V	3.0	-15.0	38.5	1.0	-52.5	-13.0	-39.5	
5.24	-65.6	V	3.0	-12.6	38.7	1.0	-50.2	-13.0	-37.2	
6.98	-66.1	V	3.0	-9.2	38.1	1.0	-46.3	-13.0	-33.3	
High Channel (1770.0MHz)										
3.54	-60.1	H	3.0	-10.6	38.6	1.0	-48.1	-13.0	-35.1	
5.31	-64.7	H	3.0	-11.2	38.6	1.0	-48.8	-13.0	-35.8	
7.08	-65.3	H	3.0	-8.0	38.0	1.0	-45.0	-13.0	-32.0	
3.54	-64.5	V	3.0	-15.1	38.6	1.0	-52.7	-13.0	-39.7	
5.31	-63.1	V	3.0	-10.0	38.6	1.0	-47.6	-13.0	-34.6	
7.08	-64.5	V	3.0	-7.5	38.0	1.0	-44.5	-13.0	-31.5	

Rev. 02.24.17

9.2. FIELD STRENGTH OF SPURIOUS RADIATION, UAT 1

9.2.1. LTE BAND 2

QPSK LTE BAND 2 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/06/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 2, 20MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1860MHz)										
3.72	-62.2	H	3.0	-12.2	38.6	1.0	-49.8	-13.0	-36.8	
5.58	-63.8	H	3.0	-9.7	38.6	1.0	-47.3	-13.0	-34.3	
7.44	-65.1	H	3.0	-7.4	37.8	1.0	-44.2	-13.0	-31.2	
3.72	-62.7	V	3.0	-12.7	38.6	1.0	-50.4	-13.0	-37.4	
5.58	-63.6	V	3.0	-9.8	38.6	1.0	-47.4	-13.0	-34.4	
7.44	-65.2	V	3.0	-7.7	37.8	1.0	-44.5	-13.0	-31.5	
Mid Channel (1880MHz)										
3.76	-61.2	H	3.0	-11.1	38.6	1.0	-48.7	-13.0	-35.7	
5.64	-63.1	H	3.0	-8.9	38.5	1.0	-46.4	-13.0	-33.4	
7.52	-65.5	H	3.0	-7.7	37.7	1.0	-44.5	-13.0	-31.5	
3.76	-62.8	V	3.0	-12.8	38.6	1.0	-50.4	-13.0	-37.4	
5.64	-63.8	V	3.0	-9.8	38.5	1.0	-47.4	-13.0	-34.4	
7.52	-65.0	V	3.0	-7.4	37.7	1.0	-44.1	-13.0	-31.1	
High Channel (1900MHz)										
3.80	-61.9	H	3.0	-11.7	38.6	1.0	-49.4	-13.0	-36.4	
5.70	-63.6	H	3.0	-9.3	38.5	1.0	-46.8	-13.0	-33.8	
7.60	-65.0	H	3.0	-7.1	37.7	1.0	-43.8	-13.0	-30.8	
3.80	-62.3	V	3.0	-12.1	38.6	1.0	-49.8	-13.0	-36.8	
5.70	-63.3	V	3.0	-9.2	38.5	1.0	-46.7	-13.0	-33.7	
7.60	-64.4	V	3.0	-6.7	37.7	1.0	-43.4	-13.0	-30.4	

Rev. 05.21.15

16QAM LTE BAND 2 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: Date: 04/06/17 Test Engineer: 40813 Configuration: EUT Only Mode: LTE Band 2, 20MHz 16QAM											
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable											
Chamber		Pre-amplifier		Filter		Limit					
3m Chamber E		3m Chamber E		Filter		EIRP					
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Low Channel (1860MHz)											
3.72	-63.0	H	3.0	-13.0	38.6	1.0	-50.6	-13.0	-37.6		
5.58	-63.6	H	3.0	-9.5	38.6	1.0	-47.1	-13.0	-34.1		
7.44	-65.3	H	3.0	-7.6	37.8	1.0	-44.4	-13.0	-31.4		
3.72	-62.5	V	3.0	-12.5	38.6	1.0	-50.1	-13.0	-37.1		
5.58	-63.7	V	3.0	-9.9	38.6	1.0	-47.5	-13.0	-34.5		
7.44	-65.3	V	3.0	-7.8	37.8	1.0	-44.6	-13.0	-31.6		
Mid Channel (1880MHz)											
3.76	-61.9	H	3.0	-11.8	38.6	1.0	-49.4	-13.0	-36.4		
5.64	-63.7	H	3.0	-9.4	38.5	1.0	-47.0	-13.0	-34.0		
7.52	-65.2	H	3.0	-7.4	37.7	1.0	-44.1	-13.0	-31.1		
3.76	-63.9	V	3.0	-13.8	38.6	1.0	-51.5	-13.0	-38.5		
5.64	-64.1	V	3.0	-10.2	38.5	1.0	-47.7	-13.0	-34.7		
7.52	-65.6	V	3.0	-8.0	37.7	1.0	-44.7	-13.0	-31.7		
High Channel (1900MHz)											
3.80	-61.7	H	3.0	-11.5	38.6	1.0	-49.1	-13.0	-36.1		
5.70	-63.1	H	3.0	-8.7	38.5	1.0	-46.2	-13.0	-33.2		
7.60	-65.0	H	3.0	-7.1	37.7	1.0	-43.8	-13.0	-30.8		
3.80	-62.1	V	3.0	-11.9	38.6	1.0	-49.6	-13.0	-36.6		
5.70	-63.7	V	3.0	-9.6	38.5	1.0	-47.1	-13.0	-34.1		
7.60	-65.2	V	3.0	-7.5	37.7	1.0	-44.2	-13.0	-31.2		
Rev. 05.21.15											

9.2.2. LTE BAND 4

QPSK LTE BAND 4 (3.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 05/12/17 Test Engineer: 10641 Configuration: EUT Only Mode: LTE Band 4, 3MHz QPSK										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		EIRP				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1720MHz)										
3.44	-65.2	H	3.0	-15.9	38.5	1.0	-53.4	-13.0	-40.4	
5.16	-64.8	H	3.0	-11.6	38.7	1.0	-49.3	-13.0	-36.3	
6.88	-65.1	H	3.0	-8.2	38.1	1.0	-45.3	-13.0	-32.3	
3.44	-66.4	V	3.0	-17.3	38.5	1.0	-54.9	-13.0	-41.9	
5.16	-65.0	V	3.0	-12.1	38.7	1.0	-49.8	-13.0	-36.8	
6.88	-66.2	V	3.0	-9.5	38.1	1.0	-46.6	-13.0	-33.6	
Mid Channel (1732.5MHz)										
3.47	-66.3	H	3.0	-16.9	38.5	1.0	-54.4	-13.0	-41.4	
5.20	-64.5	H	3.0	-11.2	38.7	1.0	-48.9	-13.0	-35.9	
6.93	-65.3	H	3.0	-8.3	38.1	1.0	-45.4	-13.0	-32.4	
3.47	-66.7	V	3.0	-17.6	38.5	1.0	-55.1	-13.0	-42.1	
5.20	-64.2	V	3.0	-11.3	38.7	1.0	-49.0	-13.0	-36.0	
6.93	-66.2	V	3.0	-9.5	38.1	1.0	-46.6	-13.0	-33.6	
High Channel (1745MHz)										
3.49	-67.4	H	3.0	-18.0	38.5	1.0	-55.5	-13.0	-42.5	
5.24	-65.6	H	3.0	-12.3	38.7	1.0	-49.9	-13.0	-36.9	
6.98	-65.1	H	3.0	-8.0	38.1	1.0	-45.1	-13.0	-32.1	
3.49	-65.6	V	3.0	-16.3	38.5	1.0	-53.9	-13.0	-40.9	
5.24	-65.9	V	3.0	-12.9	38.7	1.0	-50.5	-13.0	-37.5	
6.98	-66.3	V	3.0	-9.4	38.1	1.0	-46.5	-13.0	-33.5	
Rev. 05.21.15										

16QAM LTE BAND 4 (3.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 05/12/17 Test Engineer: 10641 Configuration: EUT Only Mode: LTE Band 4, 3MHz 16QAM										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		EIRP				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1720MHz)										
3.44	-65.6	H	3.0	-16.3	38.5	1.0	-53.8	-13.0	-40.8	
5.16	-65.2	H	3.0	-12.0	38.7	1.0	-49.7	-13.0	-36.7	
6.88	-66.1	H	3.0	-9.2	38.1	1.0	-46.3	-13.0	-33.3	
3.44	-66.3	V	3.0	-17.2	38.5	1.0	-54.7	-13.0	-41.7	
5.16	-65.1	V	3.0	-12.3	38.7	1.0	-50.0	-13.0	-37.0	
6.88	-66.0	V	3.0	-9.3	38.1	1.0	-46.4	-13.0	-33.4	
Mid Channel (1732.5MHz)										
3.47	-66.6	H	3.0	-17.2	38.5	1.0	-54.7	-13.0	-41.7	
5.20	-64.2	H	3.0	-10.9	38.7	1.0	-48.6	-13.0	-35.6	
6.93	-65.7	H	3.0	-8.7	38.1	1.0	-45.8	-13.0	-32.8	
3.47	-66.0	V	3.0	-16.8	38.5	1.0	-54.4	-13.0	-41.4	
5.20	-64.4	V	3.0	-11.5	38.7	1.0	-49.2	-13.0	-36.2	
6.93	-65.4	V	3.0	-8.6	38.1	1.0	-45.7	-13.0	-32.7	
High Channel (1745MHz)										
3.49	-65.0	H	3.0	-15.5	38.5	1.0	-53.1	-13.0	-40.1	
5.24	-65.6	H	3.0	-12.2	38.7	1.0	-49.9	-13.0	-36.9	
6.98	-66.1	H	3.0	-8.9	38.1	1.0	-46.0	-13.0	-33.0	
3.49	-66.4	V	3.0	-17.1	38.5	1.0	-54.7	-13.0	-41.7	
5.24	-66.0	V	3.0	-13.0	38.7	1.0	-50.7	-13.0	-37.7	
6.98	-67.0	V	3.0	-10.1	38.1	1.0	-47.1	-13.0	-34.1	
Rev. 05.21.15										

9.2.3. LTE BAND 5

QPSK LTE BAND 5 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/07/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 5, 10MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (829MHz)										
1.66	-63.9	H	3.0	-21.5	37.8	1.0	-58.3	-13.0	-45.3	
2.49	-64.8	H	3.0	-19.7	38.5	1.0	-57.2	-13.0	-44.2	
3.32	-66.0	H	3.0	-17.0	38.5	1.0	-54.5	-13.0	-41.5	
1.66	-63.7	V	3.0	-21.5	37.8	1.0	-58.3	-13.0	-45.3	
2.49	-64.8	V	3.0	-19.6	38.5	1.0	-57.1	-13.0	-44.1	
3.32	-66.0	V	3.0	-17.2	38.5	1.0	-54.7	-13.0	-41.7	
Mid Channel (836.5MHz)										
1.67	-63.7	H	3.0	-21.2	37.8	1.0	-58.1	-13.0	-45.1	
2.51	-64.9	H	3.0	-19.7	38.6	1.0	-57.2	-13.0	-44.2	
3.35	-66.2	H	3.0	-17.2	38.5	1.0	-54.6	-13.0	-41.6	
1.67	-63.1	V	3.0	-20.8	37.8	1.0	-57.7	-13.0	-44.7	
2.51	-64.9	V	3.0	-19.5	38.6	1.0	-57.1	-13.0	-44.1	
3.35	-65.2	V	3.0	-16.4	38.5	1.0	-53.9	-13.0	-40.9	
High Channel (844MHz)										
1.69	-63.3	H	3.0	-20.7	37.9	1.0	-57.6	-13.0	-44.6	
2.53	-64.5	H	3.0	-19.1	38.6	1.0	-56.7	-13.0	-43.7	
3.38	-65.4	H	3.0	-16.2	38.5	1.0	-53.7	-13.0	-40.7	
1.69	-64.2	V	3.0	-21.9	37.9	1.0	-58.7	-13.0	-45.7	
2.53	-64.7	V	3.0	-19.2	38.6	1.0	-56.7	-13.0	-43.7	
3.38	-65.8	V	3.0	-16.8	38.5	1.0	-54.3	-13.0	-41.3	

Rev. 05.21.15

16QAM LTE BAND 5 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/07/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 5, 10MHz 16QAM

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (829MHz)										
1.66	-63.5	H	3.0	-22.1	37.8	1.0	-58.9	-13.0	-45.9	
2.49	-65.3	H	3.0	-22.2	38.5	1.0	-59.7	-13.0	-46.7	
3.32	-66.0	H	3.0	-20.0	38.5	1.0	-57.5	-13.0	-44.5	
1.66	-63.6	V	3.0	-21.8	37.8	1.0	-58.7	-13.0	-45.7	
2.49	-64.5	V	3.0	-20.4	38.5	1.0	-57.9	-13.0	-44.9	
3.32	-66.0	V	3.0	-20.1	38.5	1.0	-57.6	-13.0	-44.6	
Mid Channel (836.5MHz)										
1.67	-62.8	H	3.0	-21.4	37.8	1.0	-58.2	-13.0	-45.2	
2.51	-65.4	H	3.0	-22.2	38.6	1.0	-59.8	-13.0	-46.8	
3.35	-65.4	H	3.0	-19.4	38.5	1.0	-56.9	-13.0	-43.9	
1.67	-63.3	V	3.0	-21.5	37.8	1.0	-58.4	-13.0	-45.4	
2.51	-64.8	V	3.0	-20.6	38.6	1.0	-58.2	-13.0	-45.2	
3.35	-65.8	V	3.0	-19.7	38.5	1.0	-57.2	-13.0	-44.2	
High Channel (844MHz)										
1.69	-63.1	H	3.0	-21.6	37.9	1.0	-58.5	-13.0	-45.5	
2.53	-65.4	H	3.0	-22.1	38.6	1.0	-59.6	-13.0	-46.6	
3.38	-66.3	H	3.0	-20.2	38.5	1.0	-57.7	-13.0	-44.7	
1.69	-63.6	V	3.0	-21.8	37.9	1.0	-58.6	-13.0	-45.6	
2.53	-65.0	V	3.0	-20.8	38.6	1.0	-58.3	-13.0	-45.3	
3.38	-65.6	V	3.0	-19.5	38.5	1.0	-57.0	-13.0	-44.0	

Rev. 05.21.15

9.2.4. LTE BAND 7

QPSK LTE BAND 7 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 04/06/17 Test Engineer: 39004 Configuration: EUT Only Mode: LTE Band 7, 20MHz QPSK										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		LTE B7				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)										
5.02	-63.4	H	3.0	-10.5	38.7	1.0	-48.2	-25.0	-23.2	
7.53	-65.3	H	3.0	-7.5	37.7	1.0	-44.2	-25.0	-19.2	
10.04	-64.9	H	3.0	-4.0	36.2	1.0	-39.2	-25.0	-14.2	
5.02	-62.8	V	3.0	-10.2	38.7	1.0	-47.9	-25.0	-22.9	
7.53	-64.6	V	3.0	-7.0	37.7	1.0	-43.7	-25.0	-18.7	
10.04	-65.4	V	3.0	-4.6	36.2	1.0	-39.8	-25.0	-14.8	
Mid Channel (2535MHz)										
5.07	-63.3	H	3.0	-10.3	38.7	1.0	-48.0	-25.0	-23.0	
7.61	-65.1	H	3.0	-7.2	37.7	1.0	-43.9	-25.0	-18.9	
10.14	-65.7	H	3.0	-4.8	36.2	1.0	-40.0	-25.0	-15.0	
5.07	-63.5	V	3.0	-10.8	38.7	1.0	-48.5	-25.0	-23.5	
7.61	-64.8	V	3.0	-7.1	37.7	1.0	-43.8	-25.0	-18.8	
10.14	-65.5	V	3.0	-4.6	36.2	1.0	-39.8	-25.0	-14.8	
High Channel (2560MHz)										
5.12	-61.9	H	3.0	-8.8	38.7	1.0	-46.5	-25.0	-21.5	
7.68	-64.8	H	3.0	-6.8	37.6	1.0	-43.4	-25.0	-18.4	
10.24	-64.6	H	3.0	-3.6	36.3	1.0	-38.9	-25.0	-13.9	
5.12	-63.2	V	3.0	-10.4	38.7	1.0	-48.1	-25.0	-23.1	
7.68	-64.3	V	3.0	-6.5	37.6	1.0	-43.1	-25.0	-18.1	
10.24	-64.8	V	3.0	-3.7	36.3	1.0	-39.0	-25.0	-14.0	
Rev. 05.21.15										

16QAM LTE BAND 7 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/06/17
Test Engineer: 39004
Configuration: EUT Only
Mode: LTE Band 7, 20MHz 16QAM

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B7

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2510MHz)										
5.02	-63.3	H	3.0	-10.4	38.7	1.0	-48.1	-25.0	-23.1	
7.53	-65.6	H	3.0	-7.8	37.7	1.0	-44.5	-25.0	-19.5	
10.04	-65.7	H	3.0	-4.9	36.2	1.0	-40.0	-25.0	-15.0	
5.02	-61.8	V	3.0	-9.1	38.7	1.0	-46.8	-25.0	-21.8	
7.53	-65.4	V	3.0	-7.8	37.7	1.0	-44.5	-25.0	-19.5	
10.04	-65.9	V	3.0	-5.1	36.2	1.0	-40.2	-25.0	-15.2	
Mid Channel (2535MHz)										
5.07	-62.7	H	3.0	-9.7	38.7	1.0	-47.4	-25.0	-22.4	
7.61	-65.0	H	3.0	-7.1	37.7	1.0	-43.8	-25.0	-18.8	
10.14	-66.9	H	3.0	-6.0	36.2	1.0	-41.2	-25.0	-16.2	
5.07	-63.8	V	3.0	-11.1	38.7	1.0	-48.8	-25.0	-23.8	
7.61	-64.1	V	3.0	-6.4	37.7	1.0	-43.1	-25.0	-18.1	
10.14	-65.6	V	3.0	-4.7	36.2	1.0	-39.9	-25.0	-14.9	
High Channel (2560MHz)										
5.12	-63.2	H	3.0	-10.1	38.7	1.0	-47.7	-25.0	-22.7	
7.68	-64.9	H	3.0	-6.9	37.6	1.0	-43.5	-25.0	-18.5	
10.24	-65.5	H	3.0	-4.5	36.3	1.0	-39.7	-25.0	-14.7	
5.12	-63.3	V	3.0	-10.5	38.7	1.0	-48.2	-25.0	-23.2	
7.68	-65.2	V	3.0	-7.4	37.6	1.0	-44.1	-25.0	-19.1	
10.24	-66.0	V	3.0	-4.9	36.3	1.0	-40.2	-25.0	-15.2	

Rev. 05.21.15

9.2.5. LTE BAND 12

QPSK LTE BAND 12 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/07/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 12, 10MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (704MHz)										
1.41	-63.0	H	3.0	-21.3	38.1	1.0	-58.4	-13.0	-45.4	
2.11	-64.9	H	3.0	-21.3	38.0	1.0	-58.3	-13.0	-45.3	
2.82	-65.2	H	3.0	-18.1	38.4	1.0	-55.6	-13.0	-42.6	
1.41	-63.1	V	3.0	-22.1	38.1	1.0	-59.2	-13.0	-46.2	
2.11	-64.1	V	3.0	-20.0	38.0	1.0	-56.9	-13.0	-43.9	
2.82	-65.1	V	3.0	-18.2	38.4	1.0	-55.6	-13.0	-42.6	
Mid Channel (707.5MHz)										
1.42	-62.9	H	3.0	-21.3	38.0	1.0	-58.3	-13.0	-45.3	
2.12	-64.3	H	3.0	-20.7	38.0	1.0	-57.7	-13.0	-44.7	
2.83	-65.2	H	3.0	-18.1	38.4	1.0	-55.5	-13.0	-42.5	
1.42	-63.1	V	3.0	-22.1	38.0	1.0	-59.1	-13.0	-46.1	
2.12	-64.2	V	3.0	-20.1	38.0	1.0	-57.1	-13.0	-44.1	
2.83	-65.2	V	3.0	-18.3	38.4	1.0	-55.7	-13.0	-42.7	
High Channel (711MHz)										
1.42	-62.6	H	3.0	-20.9	38.0	1.0	-57.9	-13.0	-44.9	
2.13	-64.3	H	3.0	-20.6	38.0	1.0	-57.6	-13.0	-44.6	
2.84	-65.5	H	3.0	-18.2	38.4	1.0	-55.7	-13.0	-42.7	
1.42	-62.7	V	3.0	-21.7	38.0	1.0	-58.7	-13.0	-45.7	
2.13	-64.3	V	3.0	-20.1	38.0	1.0	-57.1	-13.0	-44.1	
2.84	-65.6	V	3.0	-18.5	38.4	1.0	-56.0	-13.0	-43.0	

Rev. 05.21.15

16QAM LTE BAND 12 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 04/07/17 Test Engineer: 40813 Configuration: EUT Only Mode: LTE Band 12, 10MHz 16QAM										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		EIRP				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (704MHz)										
1.41	-62.7	H	3.0	-21.1	38.1	1.0	-58.1	-13.0	-45.1	
2.11	-64.7	H	3.0	-21.1	38.0	1.0	-58.1	-13.0	-45.1	
2.82	-64.7	H	3.0	-17.6	38.4	1.0	-55.0	-13.0	-42.0	
1.41	-63.1	V	3.0	-22.1	38.1	1.0	-59.2	-13.0	-46.2	
2.11	-64.5	V	3.0	-20.3	38.0	1.0	-57.3	-13.0	-44.3	
2.82	-65.8	V	3.0	-18.9	38.4	1.0	-56.3	-13.0	-43.3	
Mid Channel (707.5MHz)										
1.42	-63.6	H	3.0	-21.9	38.0	1.0	-58.9	-13.0	-45.9	
2.12	-64.5	H	3.0	-20.9	38.0	1.0	-57.9	-13.0	-44.9	
2.83	-65.0	H	3.0	-17.9	38.4	1.0	-55.3	-13.0	-42.3	
1.42	-62.6	V	3.0	-21.6	38.0	1.0	-58.7	-13.0	-45.7	
2.12	-64.4	V	3.0	-20.2	38.0	1.0	-57.2	-13.0	-44.2	
2.83	-65.2	V	3.0	-18.3	38.4	1.0	-55.7	-13.0	-42.7	
High Channel (711MHz)										
1.42	-61.8	H	3.0	-20.1	38.0	1.0	-57.2	-13.0	-44.2	
2.13	-64.6	H	3.0	-21.0	38.0	1.0	-58.0	-13.0	-45.0	
2.84	-65.9	H	3.0	-18.6	38.4	1.0	-56.1	-13.0	-43.1	
1.42	-62.7	V	3.0	-21.6	38.0	1.0	-58.7	-13.0	-45.7	
2.13	-64.5	V	3.0	-20.4	38.0	1.0	-57.4	-13.0	-44.4	
2.84	-65.4	V	3.0	-18.4	38.4	1.0	-55.8	-13.0	-42.8	
Rev. 05.21.15										

9.2.6. LTE BAND 13

QPSK LTE BAND 13 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: Date: 04/07/17 Test Engineer: 40813 Configuration: EUT Only Mode: LTE Band 13, 10MHz QPSK											
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable											
Chamber			Pre-amplifier			Filter			Limit		
3m Chamber E			3m Chamber E			Filter			LTE B13		
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Mid Channel (782MHz)											
1.56	-62.8	H	3.0	-20.6	37.8	1.0	-57.4	-40.0	-17.4		
2.35	-64.7	H	3.0	-20.3	38.1	1.0	-57.4	-13.0	-44.4		
3.13	-66.2	H	3.0	-17.6	38.4	1.0	-55.0	-13.0	-42.0		
1.56	-62.9	V	3.0	-21.2	37.8	1.0	-58.0	-40.0	-18.0		
2.35	-64.4	V	3.0	-19.7	38.1	1.0	-56.9	-13.0	-43.9		
3.13	-65.7	V	3.0	-17.5	38.4	1.0	-54.9	-13.0	-41.9		
Rev. 05.21.15											

High Frequency Substitution Measurement

UL Fremont Radiated Chamber

Company:

Project #:

Date:

Test Engineer:

Configuration:

Mode:

04/07/17

40813

EUT Only

LTE Band 13, 10MHz 16QAM

Test Equipment:

Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B13

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Mid Channel (782MHz)										
1.56	-63.0	H	3.0	-20.7	37.8	1.0	-57.6	-40.0	-17.6	
2.35	-64.3	H	3.0	-19.9	38.1	1.0	-57.1	-13.0	-44.1	
3.13	-65.9	H	3.0	-17.4	38.4	1.0	-54.8	-13.0	-41.8	
1.56	-63.1	V	3.0	-21.3	37.8	1.0	-58.2	-40.0	-18.2	
2.35	-64.9	V	3.0	-20.3	38.1	1.0	-57.4	-13.0	-44.4	
3.13	-65.7	V	3.0	-17.5	38.4	1.0	-54.9	-13.0	-41.9	

Rev. 05.21.15

9.2.7. LTE BAND 17

QPSK LTE BAND 17 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 07/21/17
Test Engineer: 10641
Configuration: EUT Only
Mode: LTE Band 17, 10MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (709MHz)										
1.418	-64.2	H	3.0	-22.5	38.0	1.0	-59.6	-13.0	-46.6	
2.127	-64.6	H	3.0	-21.0	38.0	1.0	-58.0	-13.0	-45.0	
2.836	-65.7	H	3.0	-18.5	38.4	1.0	-55.9	-13.0	-42.9	
1.418	-64.0	V	3.0	-23.0	38.0	1.0	-60.1	-13.0	-47.1	
2.127	-65.3	V	3.0	-21.1	38.0	1.0	-58.1	-13.0	-45.1	
2.836	-64.6	V	3.0	-17.6	38.4	1.0	-55.0	-13.0	-42.0	
Mid Channel (710MHz)										
1.420	-62.4	H	3.0	-20.7	38.0	1.0	-57.7	-13.0	-44.7	
2.130	-64.3	H	3.0	-20.6	38.0	1.0	-57.6	-13.0	-44.6	
2.840	-65.2	H	3.0	-18.0	38.4	1.0	-55.5	-13.0	-42.5	
1.420	-63.2	V	3.0	-22.2	38.0	1.0	-59.2	-13.0	-46.2	
2.130	-64.6	V	3.0	-20.4	38.0	1.0	-57.4	-13.0	-44.4	
2.840	-65.1	V	3.0	-18.0	38.4	1.0	-55.5	-13.0	-42.5	
High Channel (711MHz)										
1.422	-63.8	H	3.0	-22.1	38.0	1.0	-59.1	-13.0	-46.1	
2.133	-64.6	H	3.0	-20.9	38.0	1.0	-57.9	-13.0	-44.9	
2.844	-65.3	H	3.0	-18.0	38.4	1.0	-55.4	-13.0	-42.4	
1.422	-63.9	V	3.0	-22.9	38.0	1.0	-59.9	-13.0	-46.9	
2.133	-65.1	V	3.0	-21.0	38.0	1.0	-58.0	-13.0	-45.0	
2.844	-65.5	V	3.0	-18.4	38.4	1.0	-55.9	-13.0	-42.9	

Rev. 05.21.15

16QAM LTE BAND 17 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 07/21/17 Test Engineer: 10641 Configuration: EUT Only Mode: LTE Band 17, 10MHz 16QAM										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		EIRP				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (709MHz)										
1.418	-64.2	H	3.0	-22.5	38.0	1.0	-59.5	-13.0	-46.5	
2.127	-65.8	H	3.0	-22.2	38.0	1.0	-59.2	-13.0	-46.2	
2.836	-65.6	H	3.0	-18.4	38.4	1.0	-55.8	-13.0	-42.8	
1.418	-63.2	V	3.0	-22.2	38.0	1.0	-59.3	-13.0	-46.3	
2.127	-64.8	V	3.0	-20.6	38.0	1.0	-57.6	-13.0	-44.6	
2.836	-64.9	V	3.0	-17.9	38.4	1.0	-55.4	-13.0	-42.4	
Mid Channel (710MHz)										
1.420	-61.2	H	3.0	-19.5	38.0	1.0	-56.5	-13.0	-43.5	
2.130	-64.3	H	3.0	-20.6	38.0	1.0	-57.6	-13.0	-44.6	
2.840	-65.7	H	3.0	-18.5	38.4	1.0	-55.9	-13.0	-42.9	
1.420	-63.0	V	3.0	-21.9	38.0	1.0	-59.0	-13.0	-46.0	
2.130	-63.8	V	3.0	-19.6	38.0	1.0	-56.6	-13.0	-43.6	
2.840	-65.2	V	3.0	-18.2	38.4	1.0	-55.6	-13.0	-42.6	
High Channel (711MHz)										
1.422	-64.3	H	3.0	-22.6	38.0	1.0	-59.6	-13.0	-46.6	
2.133	-65.4	H	3.0	-21.7	38.0	1.0	-58.7	-13.0	-45.7	
2.844	-65.0	H	3.0	-17.8	38.4	1.0	-55.2	-13.0	-42.2	
1.422	-64.9	V	3.0	-23.9	38.0	1.0	-60.9	-13.0	-47.9	
2.133	-65.1	V	3.0	-21.0	38.0	1.0	-58.0	-13.0	-45.0	
2.844	-65.6	V	3.0	-18.5	38.4	1.0	-56.0	-13.0	-43.0	
Rev. 05.21.15										

9.2.8. LTE BAND 25

QPSK LTE BAND 25 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/06/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 25, 20MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber
 3m Chamber E

Pre-amplifier
 3m Chamber E

Filter
 Filter

Limit
 EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1860MHz)										
3.72	-62.2	H	3.0	-12.2	38.6	1.0	-49.8	-13.0	-36.8	
5.58	-64.0	H	3.0	-9.8	38.6	1.0	-47.4	-13.0	-34.4	
7.44	-64.6	H	3.0	-6.9	37.8	1.0	-43.7	-13.0	-30.7	
3.72	-62.1	V	3.0	-12.2	38.6	1.0	-49.8	-13.0	-36.8	
5.58	-64.0	V	3.0	-10.2	38.6	1.0	-47.8	-13.0	-34.8	
7.44	-64.3	V	3.0	-6.8	37.8	1.0	-43.6	-13.0	-30.6	
Mid Channel (1882.5MHz)										
3.77	-62.2	H	3.0	-12.1	38.6	1.0	-49.8	-13.0	-36.8	
5.65	-63.2	H	3.0	-8.9	38.5	1.0	-46.5	-13.0	-33.5	
7.53	-64.4	H	3.0	-6.5	37.7	1.0	-43.3	-13.0	-30.3	
3.77	-62.5	V	3.0	-12.4	38.6	1.0	-50.0	-13.0	-37.0	
5.65	-64.5	V	3.0	-10.6	38.5	1.0	-48.1	-13.0	-35.1	
7.53	-64.0	V	3.0	-6.4	37.7	1.0	-43.2	-13.0	-30.2	
High Channel (1905MHz)										
3.81	-62.3	H	3.0	-12.1	38.6	1.0	-49.7	-13.0	-36.7	
5.72	-64.0	H	3.0	-9.6	38.5	1.0	-47.2	-13.0	-34.2	
7.62	-64.8	H	3.0	-6.9	37.7	1.0	-43.6	-13.0	-30.6	
3.81	-62.0	V	3.0	-11.8	38.6	1.0	-49.5	-13.0	-36.5	
5.72	-64.2	V	3.0	-10.1	38.5	1.0	-47.6	-13.0	-34.6	
7.62	-64.7	V	3.0	-7.0	37.7	1.0	-43.7	-13.0	-30.7	

Rev. 05.21.15

16QAM LTE BAND 25 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: Date: 04/06/17 Test Engineer: 40813 Configuration: EUT Only Mode: LTE Band 25, 20MHz 16QAM											
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable											
Chamber			Pre-amplifier			Filter			Limit		
3m Chamber E			3m Chamber E			Filter			EIRP		
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Low Channel (1860MHz)											
3.72	-62.4	H	3.0	-12.4	38.6	1.0	-50.1	-13.0	-37.1		
5.58	-64.3	H	3.0	-10.2	38.6	1.0	-47.7	-13.0	-34.7		
7.44	-64.3	H	3.0	-6.6	37.8	1.0	-43.4	-13.0	-30.4		
3.72	-62.3	V	3.0	-12.4	38.6	1.0	-50.0	-13.0	-37.0		
5.58	-64.1	V	3.0	-10.3	38.6	1.0	-47.9	-13.0	-34.9		
7.44	-65.1	V	3.0	-7.6	37.8	1.0	-44.4	-13.0	-31.4		
Mid Channel (1882.5MHz)											
3.77	-62.2	H	3.0	-12.1	38.6	1.0	-49.7	-13.0	-36.7		
5.65	-63.7	H	3.0	-9.4	38.5	1.0	-47.0	-13.0	-34.0		
7.53	-65.4	H	3.0	-7.6	37.7	1.0	-44.3	-13.0	-31.3		
3.77	-61.4	V	3.0	-11.4	38.6	1.0	-49.0	-13.0	-36.0		
5.65	-63.7	V	3.0	-9.8	38.5	1.0	-47.3	-13.0	-34.3		
7.53	-64.6	V	3.0	-7.0	37.7	1.0	-43.7	-13.0	-30.7		
High Channel (1905MHz)											
3.81	-62.4	H	3.0	-12.2	38.6	1.0	-49.9	-13.0	-36.9		
5.72	-63.8	H	3.0	-9.4	38.5	1.0	-46.9	-13.0	-33.9		
7.62	-64.6	H	3.0	-6.7	37.7	1.0	-43.4	-13.0	-30.4		
3.81	-62.4	V	3.0	-12.2	38.6	1.0	-49.8	-13.0	-36.8		
5.72	-63.5	V	3.0	-9.4	38.5	1.0	-46.9	-13.0	-33.9		
7.62	-64.3	V	3.0	-6.6	37.7	1.0	-43.2	-13.0	-30.2		
Rev. 05.21.15											

9.2.9. LTE BAND 26

QPSK LTE BAND 26 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/08/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 26 (90S), 10MHz QPSK

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber F

Pre-amplifier

3m Chamber F

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Mid Channel (819MHz)										
1.64	-65.8	H	3.0	-24.7	33.7	1.0	-57.4	-13.0	-44.4	
2.46	-66.2	H	3.0	-22.1	34.1	1.0	-55.2	-13.0	-42.2	
3.28	-65.6	H	3.0	-17.4	34.7	1.0	-51.1	-13.0	-38.1	
1.64	-66.8	V	3.0	-23.4	33.7	1.0	-56.1	-13.0	-43.1	
2.46	-65.2	V	3.0	-20.4	34.1	1.0	-53.6	-13.0	-40.6	
3.28	-65.3	V	3.0	-16.9	34.7	1.0	-50.6	-13.0	-37.6	

Rev. 05.21.15

16QAM LTE BAND 26 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/08/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 26 (90S), 10MHz 16QAM

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber F

Pre-amplifier

3m Chamber F

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Mid Channel (819MHz)										
1.64	-65.8	H	3.0	-24.8	33.7	1.0	-57.5	-13.0	-44.5	
2.46	-65.9	H	3.0	-21.9	34.1	1.0	-55.0	-13.0	-42.0	
3.28	-66.0	H	3.0	-17.8	34.7	1.0	-51.5	-13.0	-38.5	
1.64	-66.1	V	3.0	-22.7	33.7	1.0	-55.4	-13.0	-42.4	
2.46	-66.2	V	3.0	-21.5	34.1	1.0	-54.6	-13.0	-41.6	
3.28	-65.7	V	3.0	-17.3	34.7	1.0	-51.0	-13.0	-38.0	

Rev. 05.21.15

9.2.10. LTE BAND 30

QPSK LTE BAND 30 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/07/17
Test Engineer: 40813
Configuration: EUT only
Mode: LTE Band 30, 10MHz QPSK

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B30

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Mid Channel (2310MHz)										
4.62	-67.5	H	3.0	-13.7	37.9	1.0	-50.6	-40.0	-10.6	
6.93	-68.3	H	3.0	-9.7	36.5	1.0	-45.1	-40.0	-5.1	
9.24	-69.5	H	3.0	-8.0	34.9	1.0	-41.9	-40.0	-1.9	
4.62	-67.3	V	3.0	-13.6	37.9	1.0	-50.5	-40.0	-10.5	
6.93	-68.2	V	3.0	-8.7	36.5	1.0	-44.2	-40.0	-4.2	
9.24	-70.2	V	3.0	-8.4	34.9	1.0	-42.3	-40.0	-2.3	

Rev. 05.21.15

16QAM LTE BAND 30 (10.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber										
Company: Project #: Date: 04/07/17 Test Engineer: 40813 Configuration: EUT only Mode: LTE Band 30, 10MHz 16QAM										
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable										
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber E		3m Chamber E		Filter		LTE B30				
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Mid Channel (2310MHz)										
4.62	-67.4	H	3.0	-13.6	37.9	1.0	-50.6	-40.0	-10.6	
6.93	-68.1	H	3.0	-9.5	36.5	1.0	-45.0	-40.0	-5.0	
9.24	-70.3	H	3.0	-8.7	34.9	1.0	-42.6	-40.0	-2.6	
4.62	-67.6	V	3.0	-13.9	37.9	1.0	-50.8	-40.0	-10.8	
6.93	-68.6	V	3.0	-9.1	36.5	1.0	-44.6	-40.0	-4.6	
9.24	-70.2	V	3.0	-8.4	34.9	1.0	-42.3	-40.0	-2.3	
Rev. 05.21.15										

9.2.11. LTE BAND 41

QPSK LTE BAND 41 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/12/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 41, 20MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

LTE B41

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (2506MHz)										
5.01	-63.4	H	3.0	-10.5	38.7	1.0	-48.2	-25.0	-23.2	
7.52	-65.0	H	3.0	-7.2	37.7	1.0	-44.0	-25.0	-19.0	
10.02	-65.0	H	3.0	-4.2	36.1	1.0	-39.4	-25.0	-14.4	
5.01	-63.2	V	3.0	-10.6	38.7	1.0	-48.3	-25.0	-23.3	
7.52	-64.4	V	3.0	-6.8	37.7	1.0	-43.6	-25.0	-18.6	
10.02	-65.9	V	3.0	-5.1	36.1	1.0	-40.3	-25.0	-15.3	
Mid Channel (2593MHz)										
5.19	-64.6	H	3.0	-11.4	38.7	1.0	-49.1	-25.0	-24.1	
7.78	-65.3	H	3.0	-7.2	37.6	1.0	-43.7	-25.0	-18.7	
10.37	-65.7	H	3.0	-4.6	36.4	1.0	-39.9	-25.0	-14.9	
5.19	-64.2	V	3.0	-11.2	38.7	1.0	-48.9	-25.0	-23.9	
7.78	-65.1	V	3.0	-7.2	37.6	1.0	-43.7	-25.0	-18.7	
10.37	-68.0	V	3.0	-6.9	36.4	1.0	-42.2	-25.0	-17.2	
High Channel (2680MHz)										
5.36	-64.9	H	3.0	-11.3	38.6	1.0	-48.9	-25.0	-23.9	
8.04	-65.4	H	3.0	-6.9	37.4	1.0	-43.3	-25.0	-18.3	
10.72	-65.8	H	3.0	-4.4	36.6	1.0	-40.0	-25.0	-15.0	
5.36	-65.2	V	3.0	-11.9	38.6	1.0	-49.5	-25.0	-24.5	
8.04	-65.5	V	3.0	-7.2	37.4	1.0	-43.6	-25.0	-18.6	
10.72	-65.3	V	3.0	-3.7	36.6	1.0	-39.3	-25.0	-14.3	

Rev. 05.21.15

16QAM LTE BAND 41 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement UL Fremont Radiated Chamber											
Company: Project #: Date: 04/12/17 Test Engineer: 40813 Configuration: EUT Only Mode: LTE Band 41, 20MHz 16QAM											
Test Equipment: Substitution: Horn T59 Substitution, and 8ft SMA Cable											
Chamber		Pre-amplifier		Filter		Limit					
3m Chamber E		3m Chamber E		Filter		LTE B41					
Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes	
Low Channel (2506MHz)											
5.01	-63.3	H	3.0	-10.5	38.7	1.0	-48.1	-25.0	-23.1		
7.52	-65.0	H	3.0	-7.2	37.7	1.0	-44.0	-25.0	-19.0		
10.02	-65.5	H	3.0	-4.7	36.1	1.0	-39.9	-25.0	-14.9		
5.01	-63.0	V	3.0	-10.4	38.7	1.0	-48.1	-25.0	-23.1		
7.52	-64.7	V	3.0	-7.1	37.7	1.0	-43.8	-25.0	-18.8		
10.02	-65.6	V	3.0	-4.8	36.1	1.0	-39.9	-25.0	-14.9		
Mid Channel (2593MHz)											
5.19	-64.2	H	3.0	-11.0	38.7	1.0	-48.7	-25.0	-23.7		
7.78	-65.6	H	3.0	-7.5	37.6	1.0	-44.1	-25.0	-19.1		
10.37	-65.8	H	3.0	-4.7	36.4	1.0	-40.1	-25.0	-15.1		
5.19	-64.0	V	3.0	-11.1	38.7	1.0	-48.8	-25.0	-23.8		
7.78	-65.7	V	3.0	-7.8	37.6	1.0	-44.4	-25.0	-19.4		
10.37	-65.8	V	3.0	-4.6	36.4	1.0	-39.9	-25.0	-14.9		
High Channel (2680MHz)											
5.36	-64.3	H	3.0	-10.7	38.6	1.0	-48.3	-25.0	-23.3		
8.04	-63.9	H	3.0	-5.4	37.4	1.0	-41.8	-25.0	-16.8		
10.72	-65.9	H	3.0	-4.5	36.6	1.0	-40.1	-25.0	-15.1		
5.36	-64.0	V	3.0	-10.7	38.6	1.0	-48.3	-25.0	-23.3		
8.04	-65.2	V	3.0	-6.9	37.4	1.0	-43.3	-25.0	-18.3		
10.72	-65.8	V	3.0	-4.2	36.6	1.0	-39.8	-25.0	-14.8		
Rev. 05.21.15											

9.2.12. LTE BAND 66

QPSK LTE BAND 66 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/13/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 66, 20MHz QPSK

Test Equipment:
 Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1720.0MHz)										
3.44	-65.8	H	3.0	-16.5	38.5	1.0	-54.0	-13.0	-41.0	
5.16	-63.6	H	3.0	-10.4	38.7	1.0	-48.1	-13.0	-35.1	
6.88	-66.3	H	3.0	-9.4	38.1	1.0	-46.5	-13.0	-33.5	
3.44	-67.0	V	3.0	-17.9	38.5	1.0	-55.4	-13.0	-42.4	
5.16	-65.1	V	3.0	-12.2	38.7	1.0	-49.9	-13.0	-36.9	
6.88	-65.6	V	3.0	-8.9	38.1	1.0	-46.1	-13.0	-33.1	
Mid Channel (1745.0MHz)										
3.49	-64.3	H	3.0	-14.9	38.5	1.0	-52.4	-13.0	-39.4	
5.24	-63.2	H	3.0	-9.9	38.7	1.0	-47.6	-13.0	-34.6	
6.98	-64.5	H	3.0	-7.4	38.1	1.0	-44.5	-13.0	-31.5	
3.49	-64.4	V	3.0	-15.1	38.5	1.0	-52.7	-13.0	-39.7	
5.24	-63.7	V	3.0	-10.7	38.7	1.0	-48.4	-13.0	-35.4	
6.98	-63.9	V	3.0	-6.9	38.1	1.0	-44.0	-13.0	-31.0	
High Channel (1770.0MHz)										
3.54	-65.1	H	3.0	-15.6	38.6	1.0	-53.1	-13.0	-40.1	
5.31	-64.5	H	3.0	-11.0	38.6	1.0	-48.6	-13.0	-35.6	
7.08	-63.7	H	3.0	-6.4	38.0	1.0	-43.5	-13.0	-30.5	
3.54	-64.2	V	3.0	-14.8	38.6	1.0	-52.4	-13.0	-39.4	
5.31	-64.0	V	3.0	-10.8	38.6	1.0	-48.5	-13.0	-35.5	
7.08	-64.6	V	3.0	-7.6	38.0	1.0	-44.6	-13.0	-31.6	

Rev. 02.24.17

16QAM LTE BAND 66 (20.0MHZ BANDWIDTH)

High Frequency Substitution Measurement
UL Fremont Radiated Chamber

Company:
Project #:
Date: 04/13/17
Test Engineer: 40813
Configuration: EUT Only
Mode: LTE Band 66, 20MHz 16QAM

Test Equipment:
Substitution: Horn T59 Substitution, and 8ft SMA Cable

Chamber

3m Chamber E

Pre-amplifier

3m Chamber E

Filter

Filter

Limit

EIRP

Frequency (GHz)	SA reading (dBm)	Ant. Pol. (H/V)	Distance	EIRP @ TX Ant End (dBm)	Preamp	Attenuator	EIRP	Limit	Delta	Notes
Low Channel (1720.0MHz)										
3.44	-65.6	H	3.0	-16.3	38.5	1.0	-53.8	-13.0	-40.8	
5.16	-64.1	H	3.0	-10.9	38.7	1.0	-48.6	-13.0	-35.6	
6.88	-66.5	H	3.0	-9.5	38.1	1.0	-46.6	-13.0	-33.6	
3.44	-66.6	V	3.0	-17.5	38.5	1.0	-55.1	-13.0	-42.1	
5.16	-64.0	V	3.0	-11.1	38.7	1.0	-48.8	-13.0	-35.8	
6.88	-66.0	V	3.0	-9.3	38.1	1.0	-46.4	-13.0	-33.4	
Mid Channel (1745.0MHz)										
3.49	-63.2	H	3.0	-13.8	38.5	1.0	-51.3	-13.0	-38.3	
5.24	-63.7	H	3.0	-10.4	38.7	1.0	-48.1	-13.0	-35.1	
6.98	-64.5	H	3.0	-7.3	38.1	1.0	-44.4	-13.0	-31.4	
3.49	-64.2	V	3.0	-15.0	38.5	1.0	-52.5	-13.0	-39.5	
5.24	-63.9	V	3.0	-10.9	38.7	1.0	-48.6	-13.0	-35.6	
6.98	-64.6	V	3.0	-7.7	38.1	1.0	-44.7	-13.0	-31.7	
High Channel (1770.0MHz)										
3.54	-63.3	H	3.0	-13.7	38.6	1.0	-51.3	-13.0	-38.3	
5.31	-64.8	H	3.0	-11.3	38.6	1.0	-49.0	-13.0	-36.0	
7.08	-64.8	H	3.0	-7.5	38.0	1.0	-44.5	-13.0	-31.5	
3.54	-64.3	V	3.0	-14.9	38.6	1.0	-52.5	-13.0	-39.5	
5.31	-65.2	V	3.0	-12.0	38.6	1.0	-49.6	-13.0	-36.6	
7.08	-64.6	V	3.0	-7.6	38.0	1.0	-44.6	-13.0	-31.6	

Rev. 02.24.17