
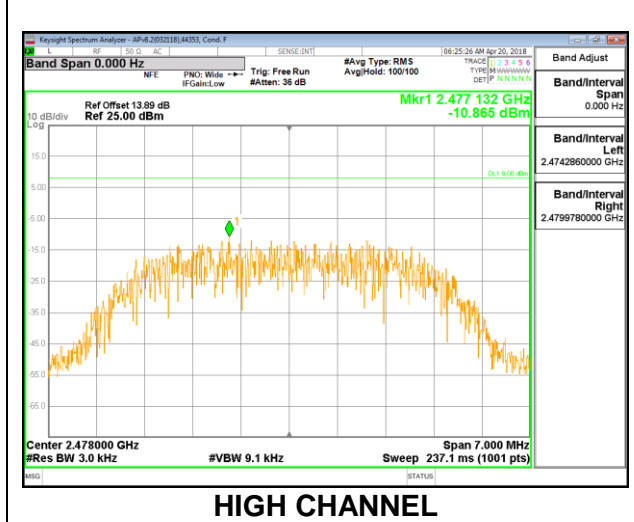


8.6.4. LOW POWER HDR8



Antenna 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-11.71	8	-19.71
Middle	2441	-10.04	8	-18.04
High	2478	-10.87	8	-18.87

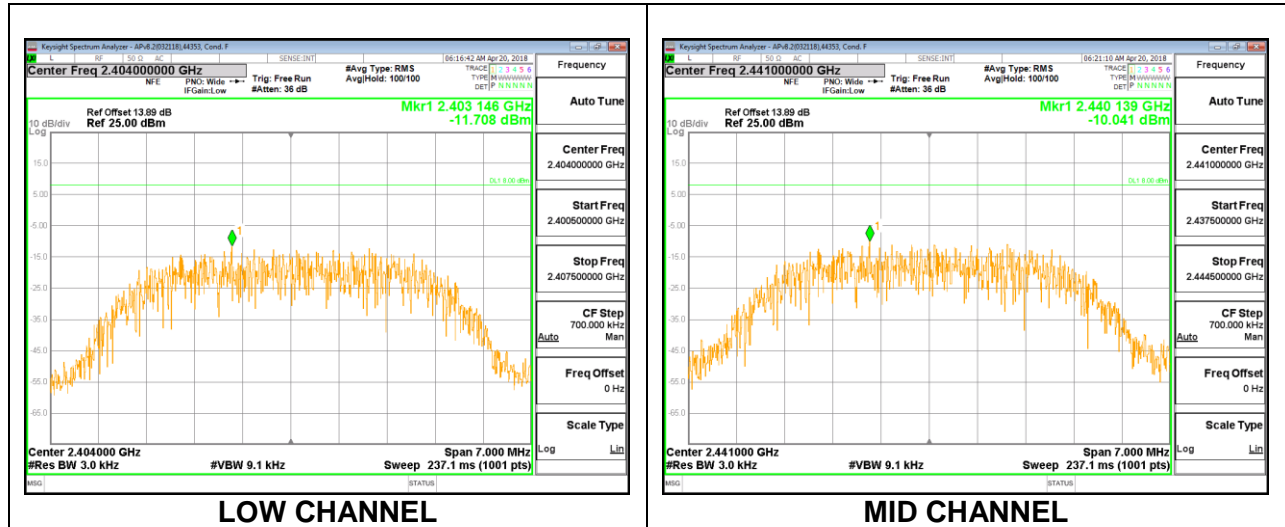

Antenna 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-10.58	8	-18.58
Middle	2441	-9.06	8	-17.06
High	2478	-12.50	8	-20.50

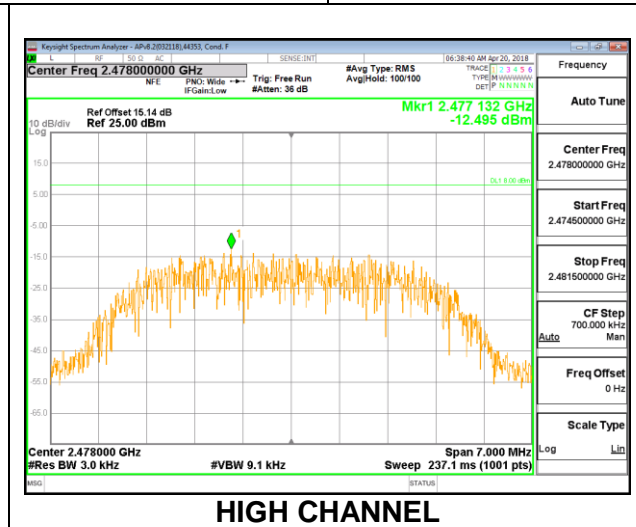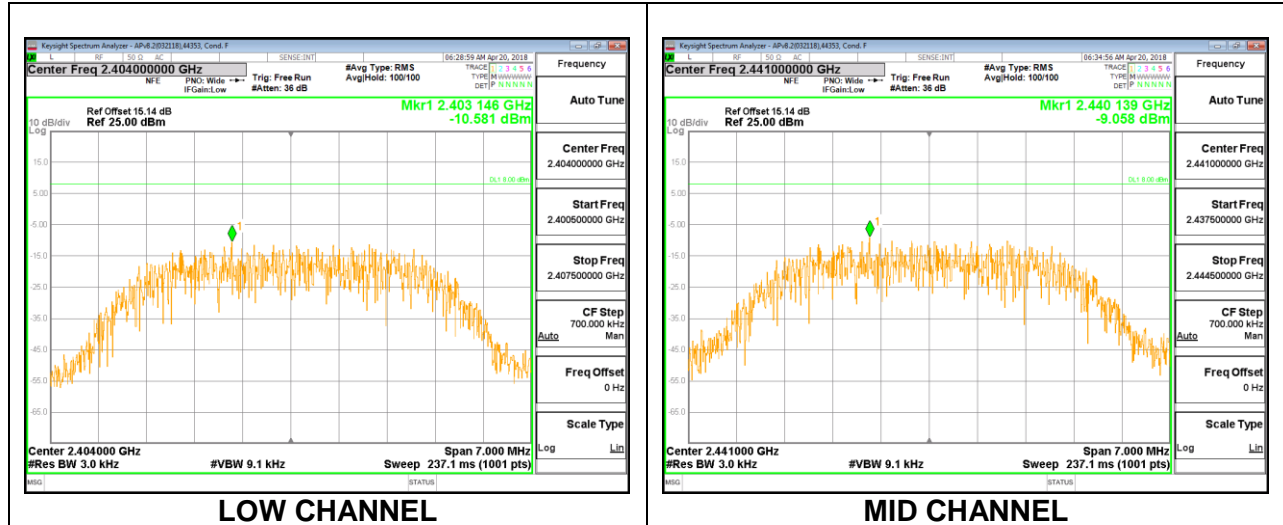

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)


RSS-247 5.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


RESULTS

8.7.1. HIGH POWER HDR4

Antenna 4

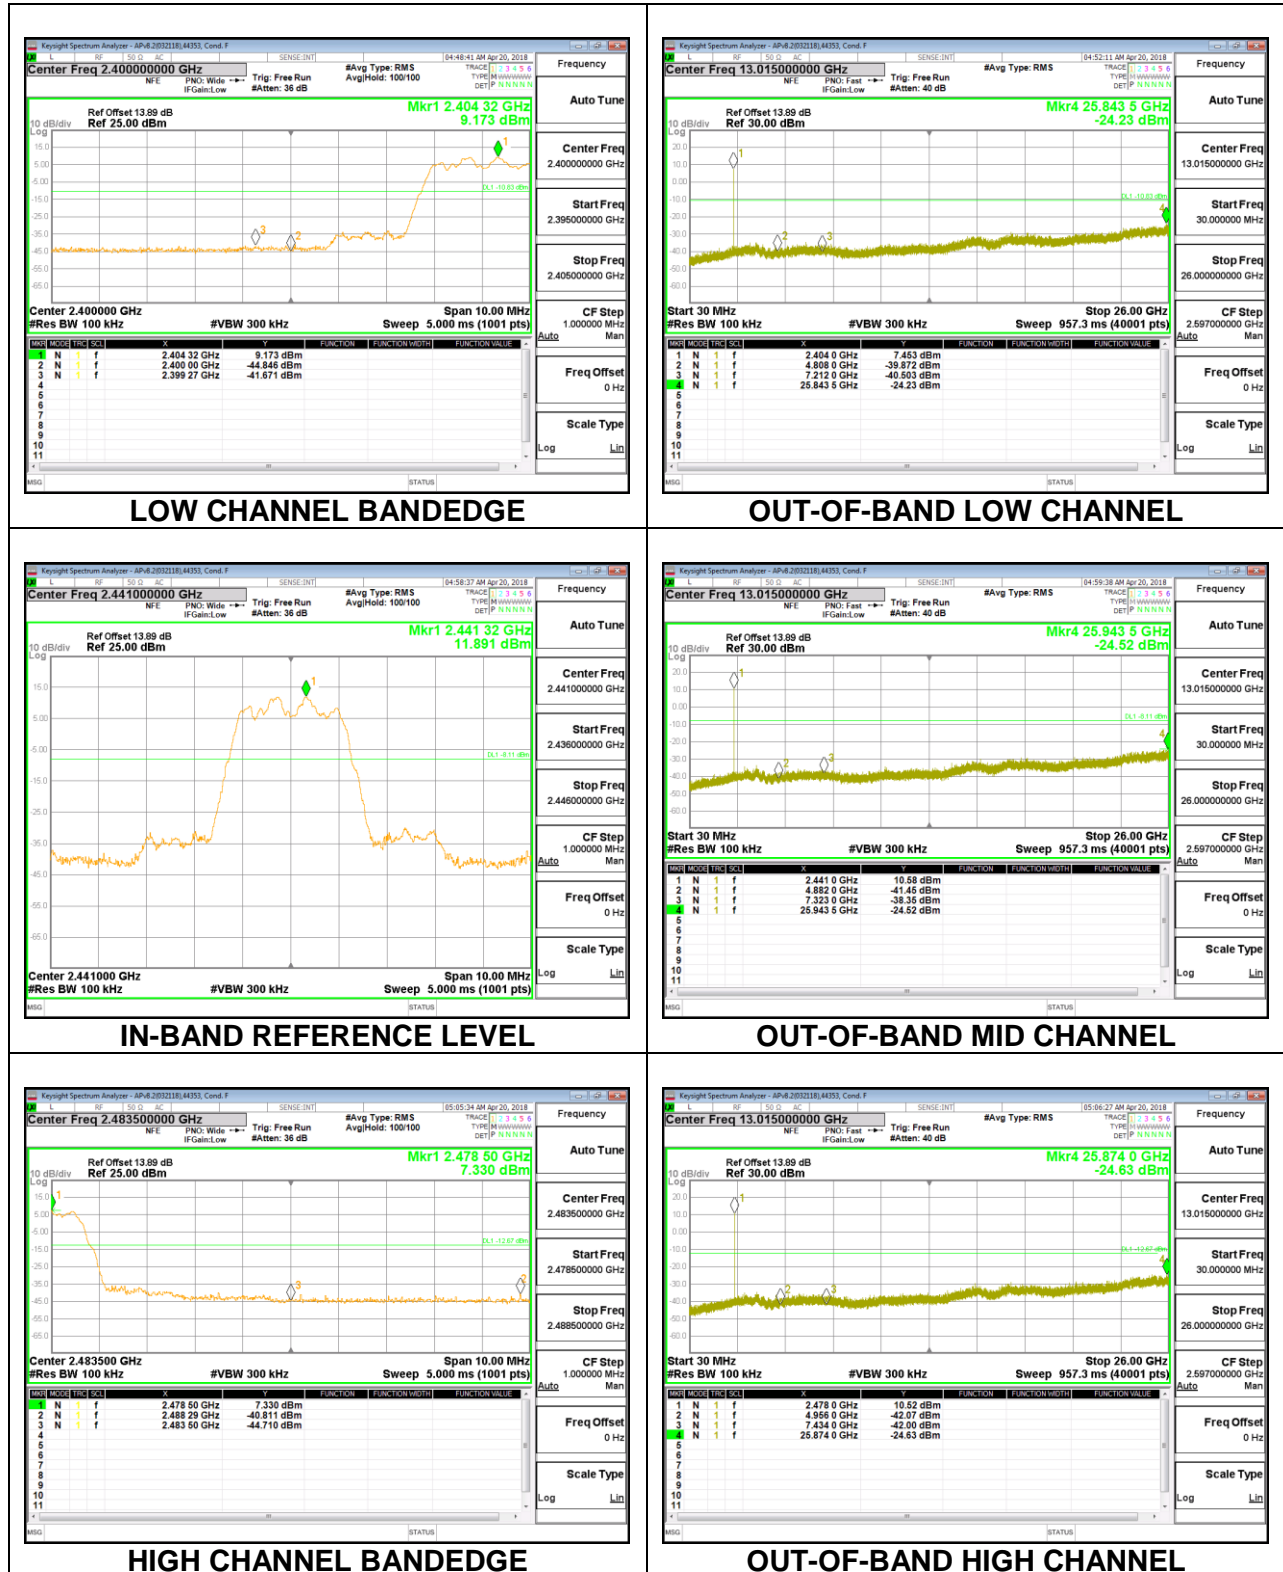


Antenna 3

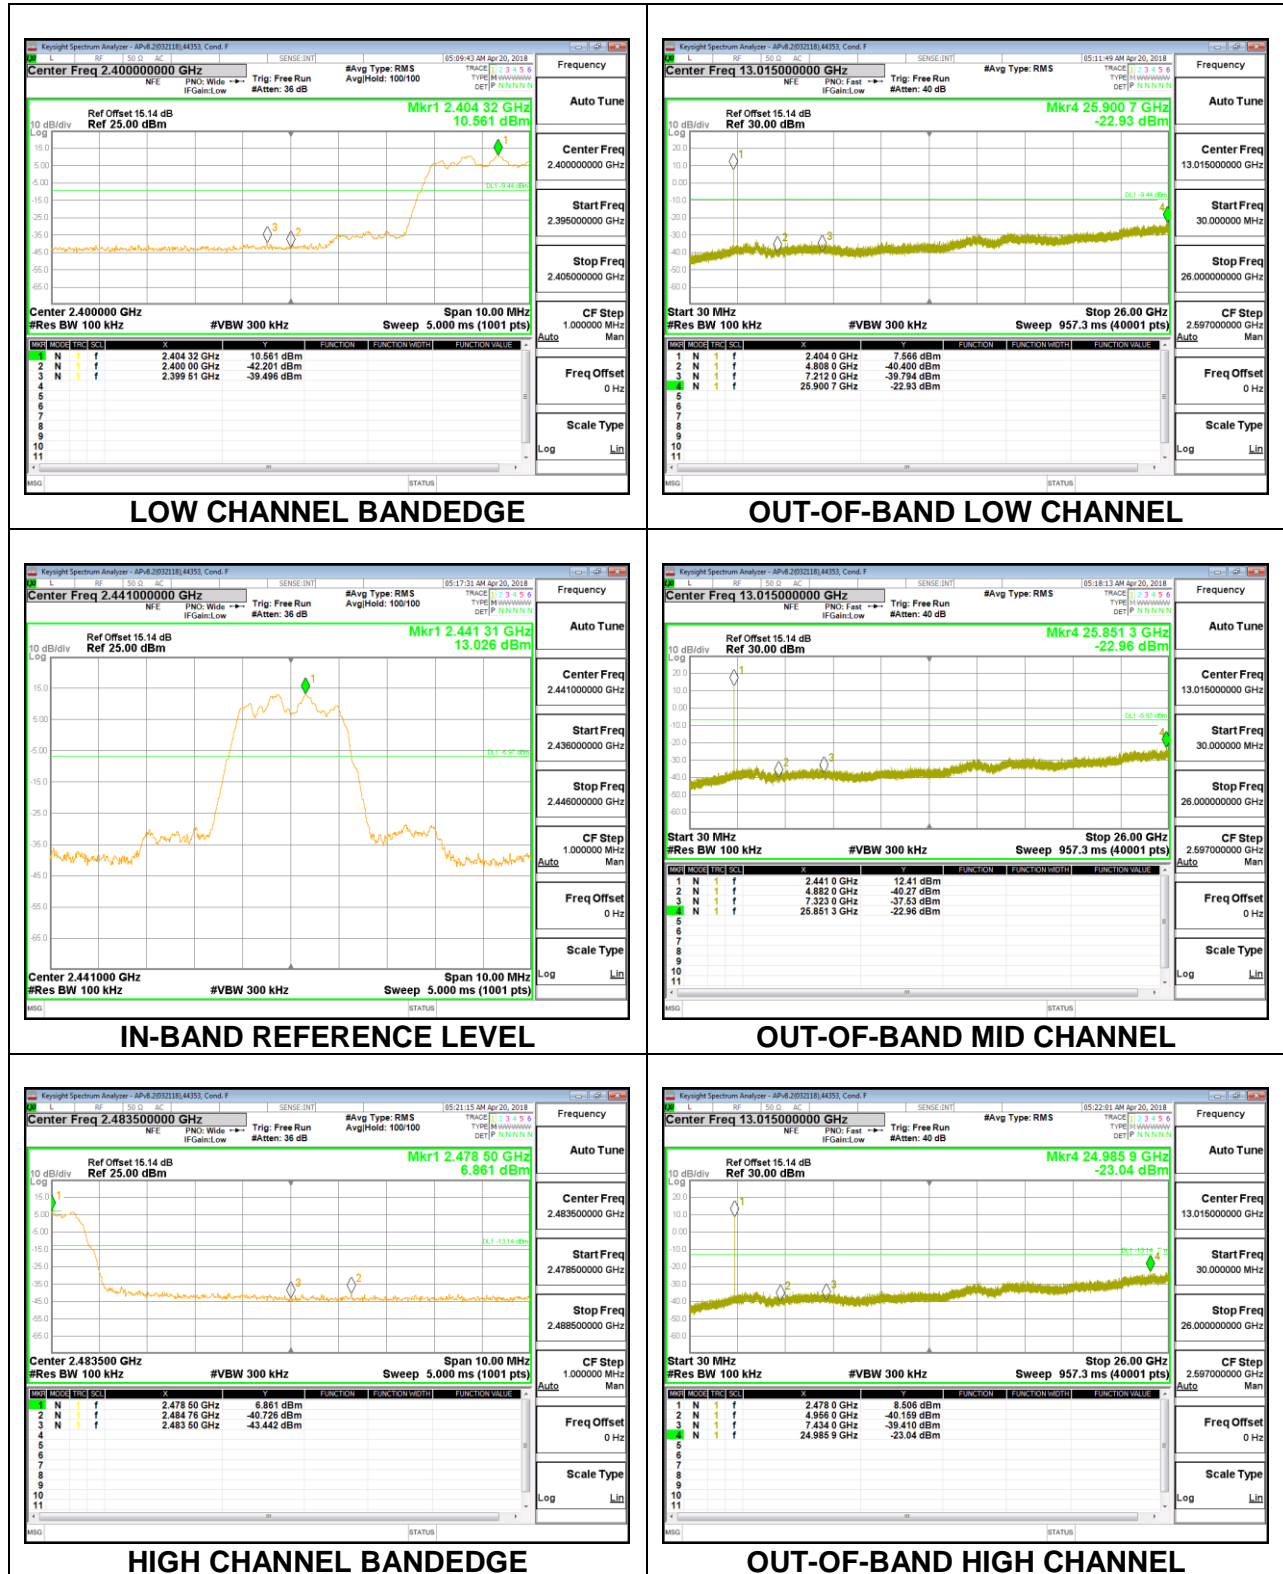


8.7.2. HIGH POWER HDR8

Antenna 4

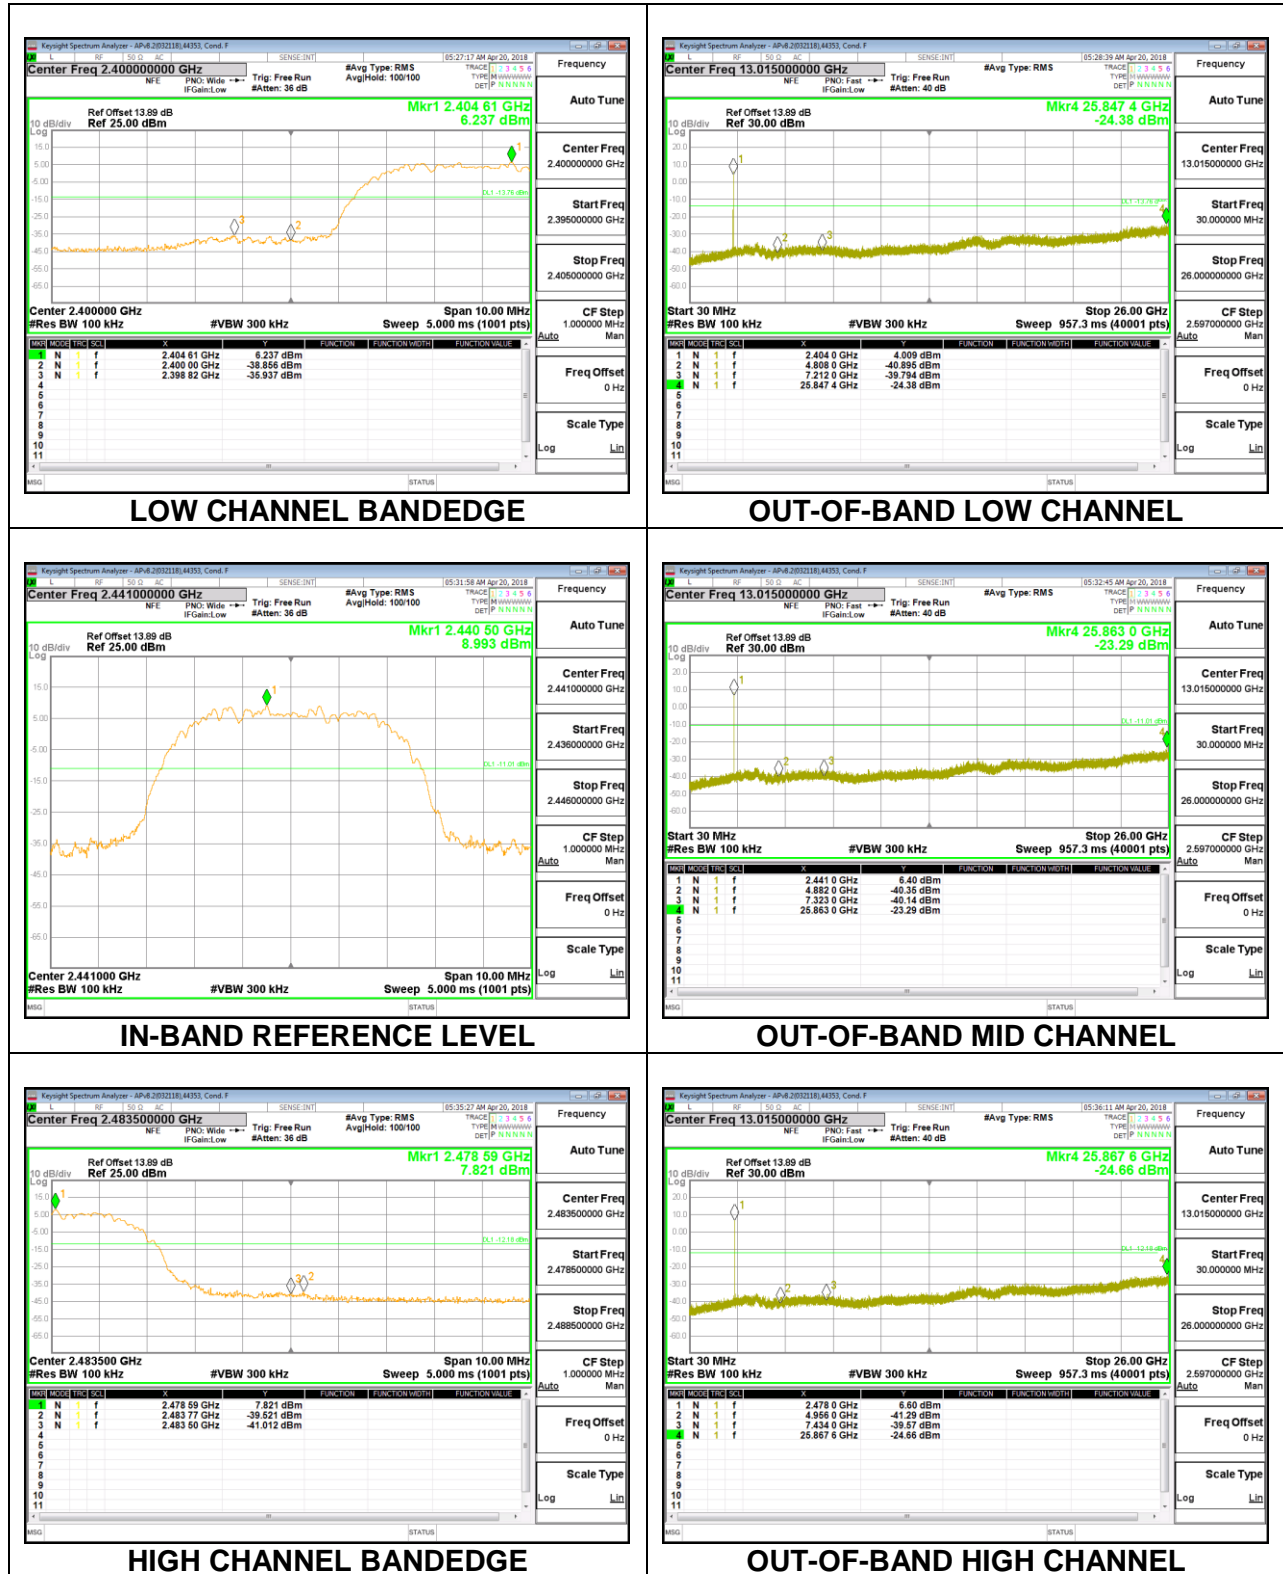


Antenna 3

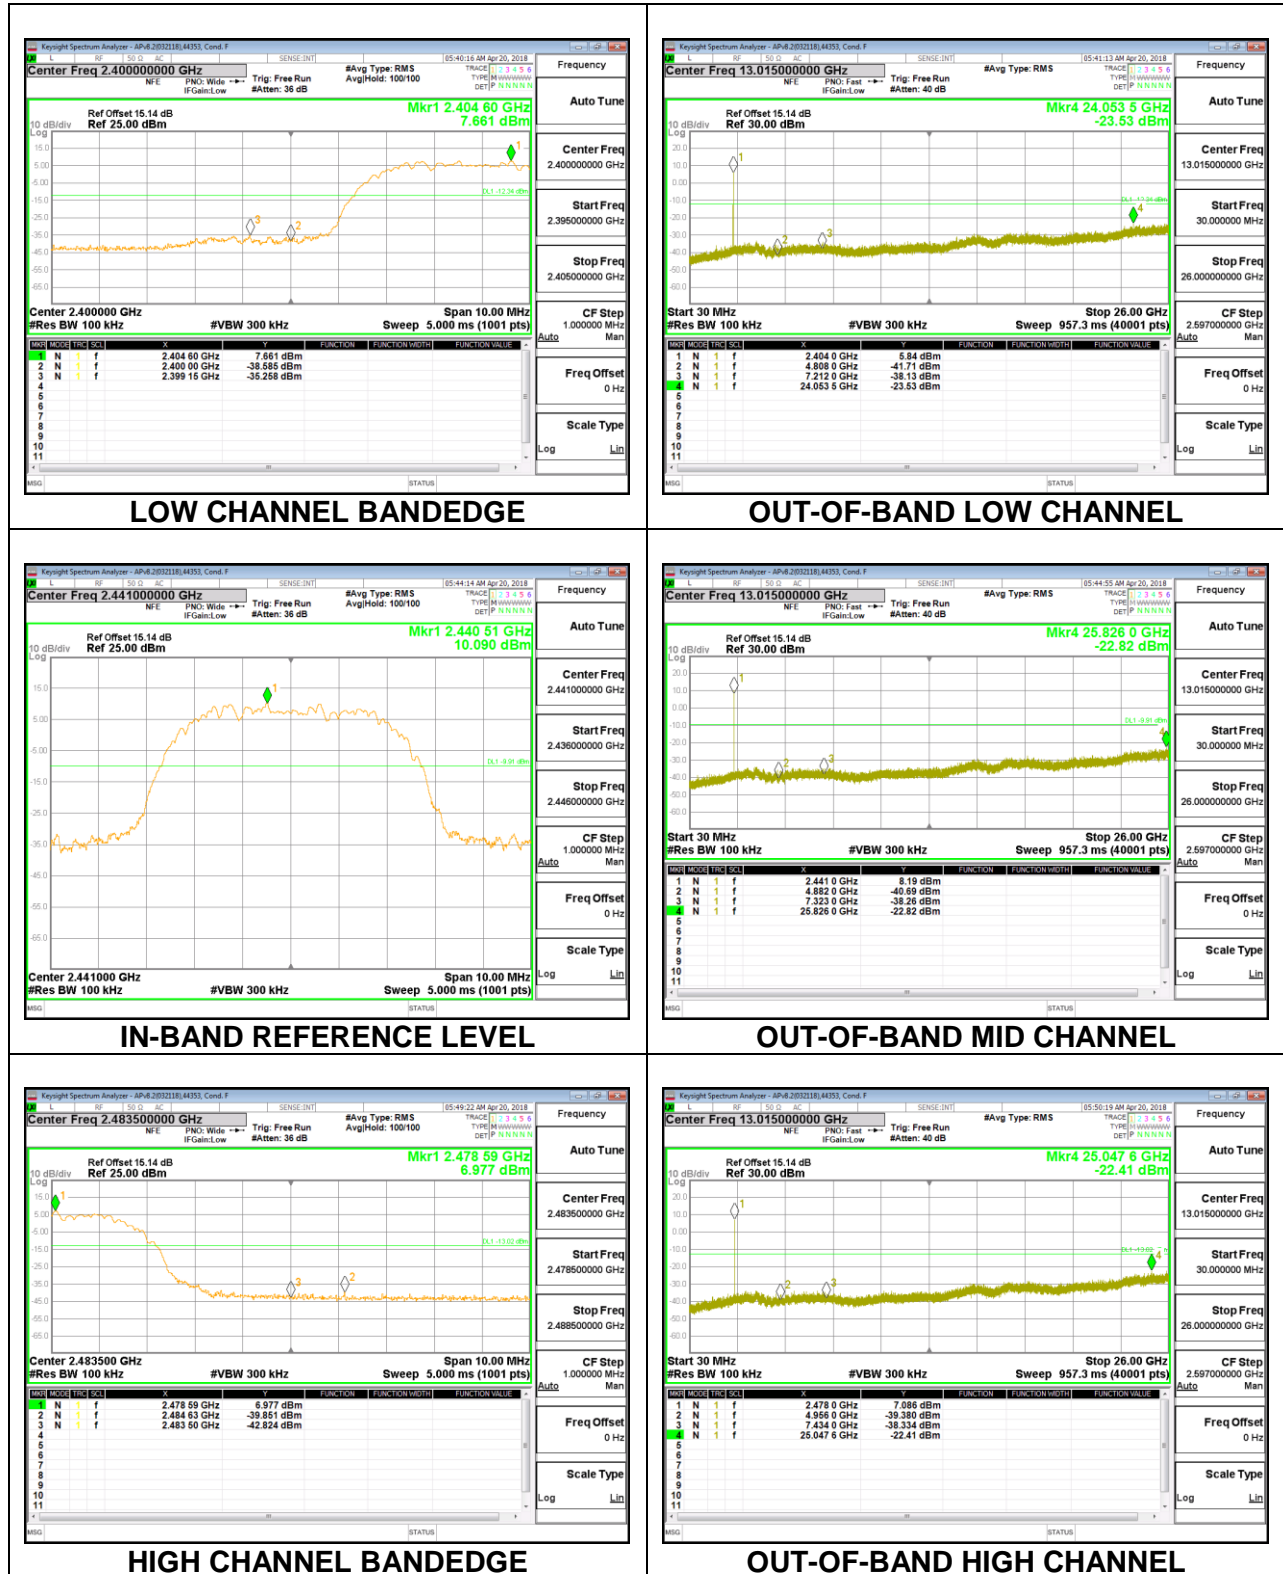


8.7.3. LOW POWER HDR4

Antenna 4

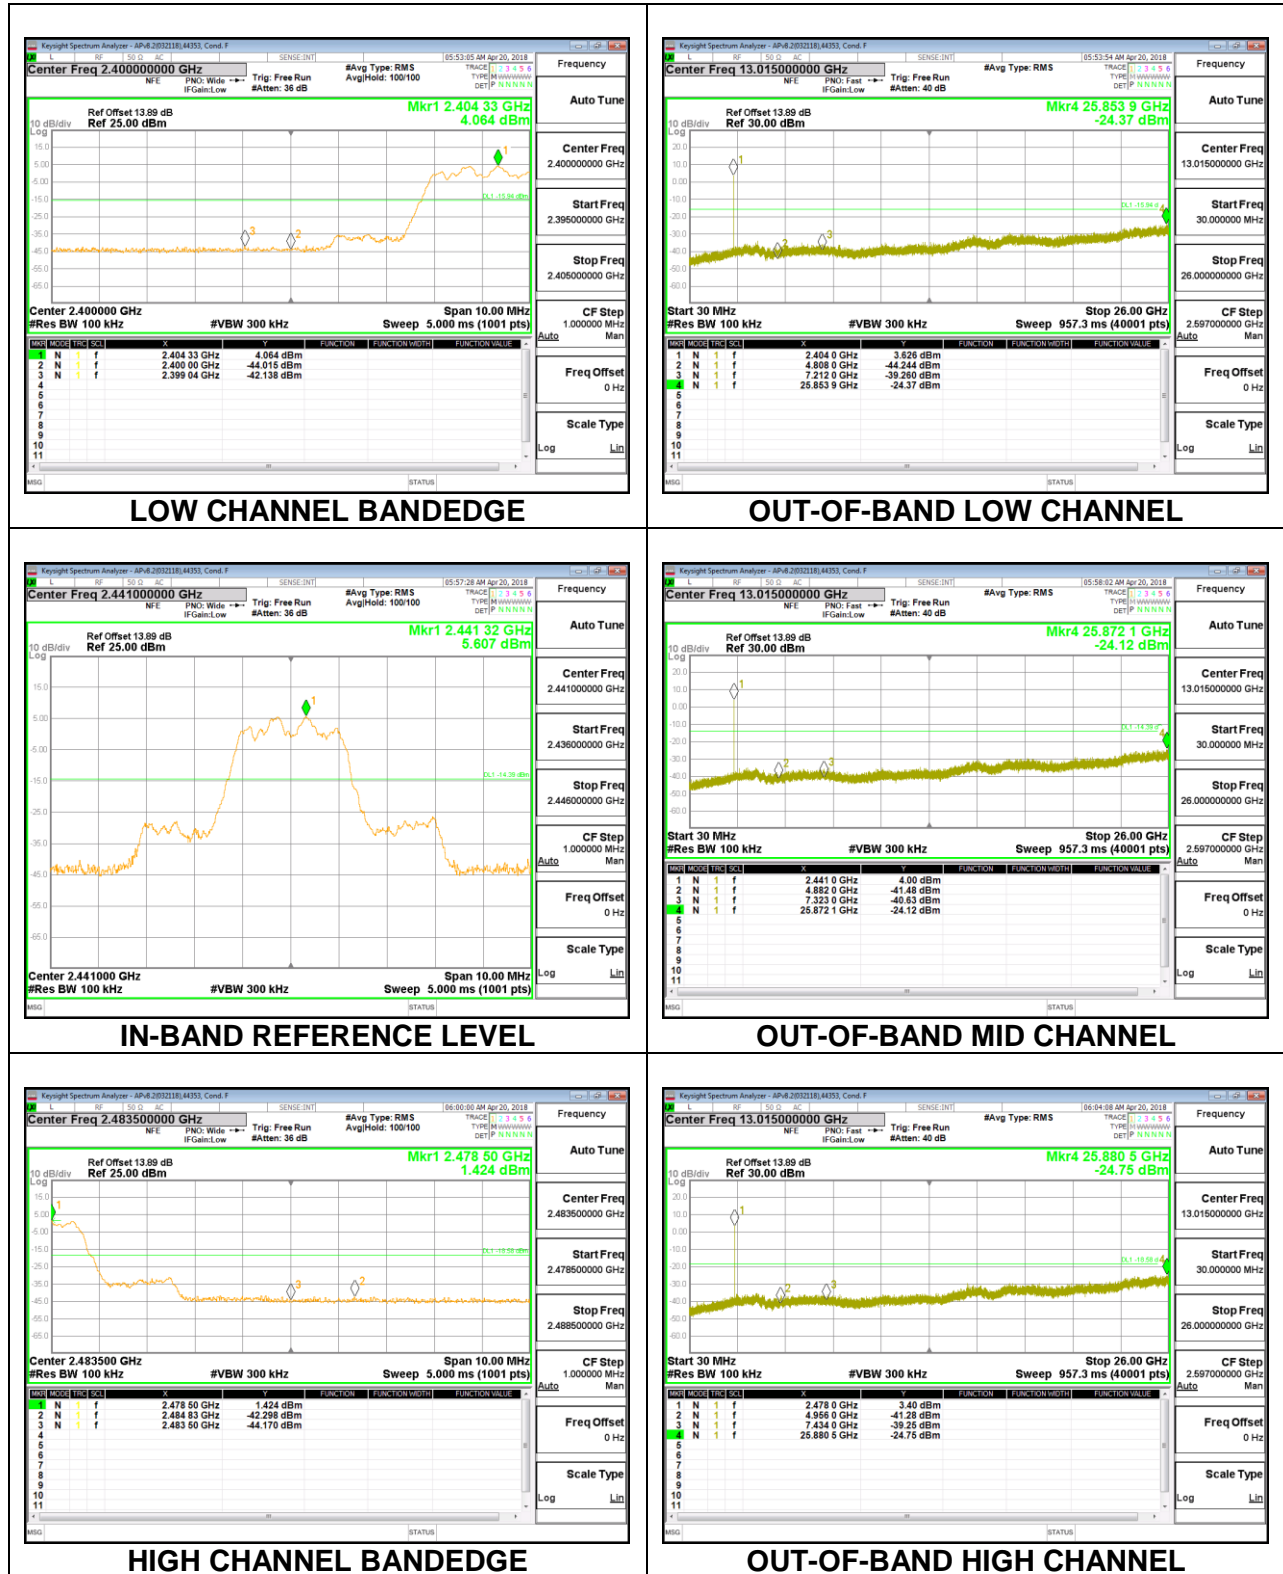


Antenna 3

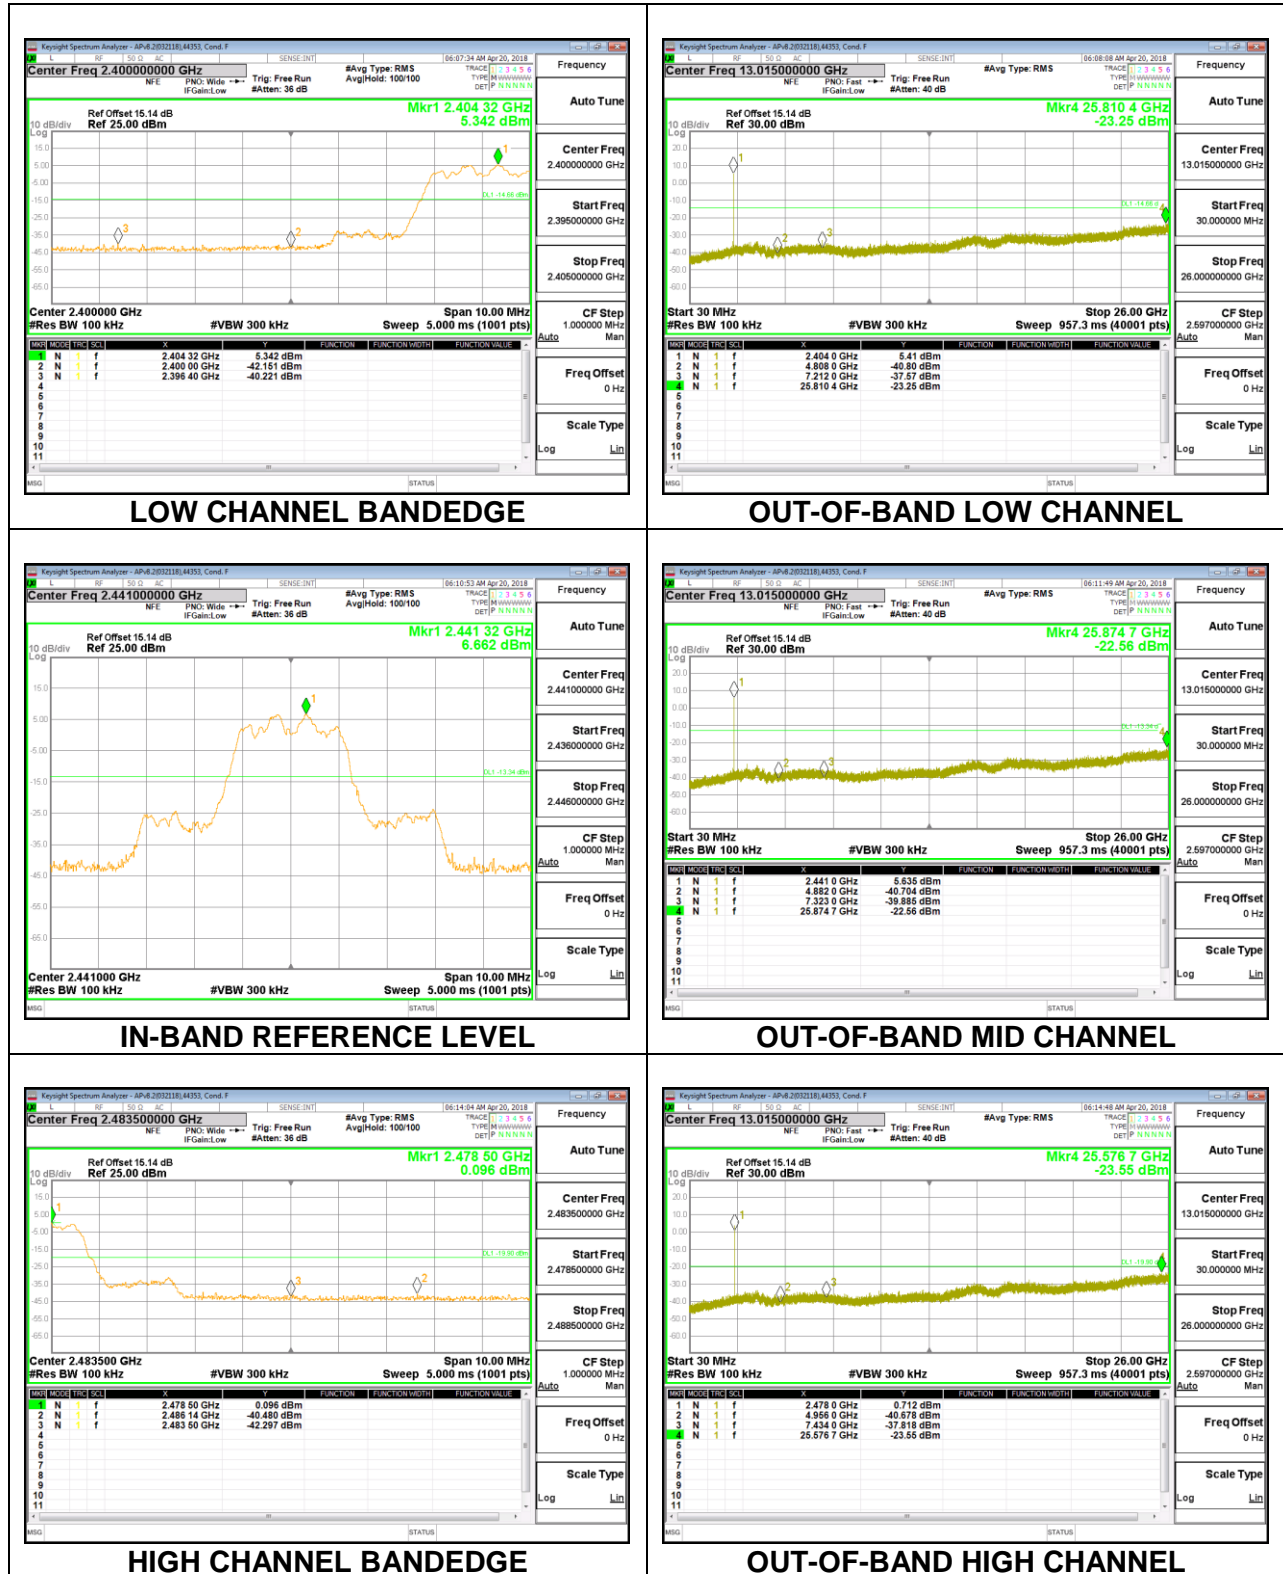


8.7.4. LOW POWER HDR8


Antenna 4

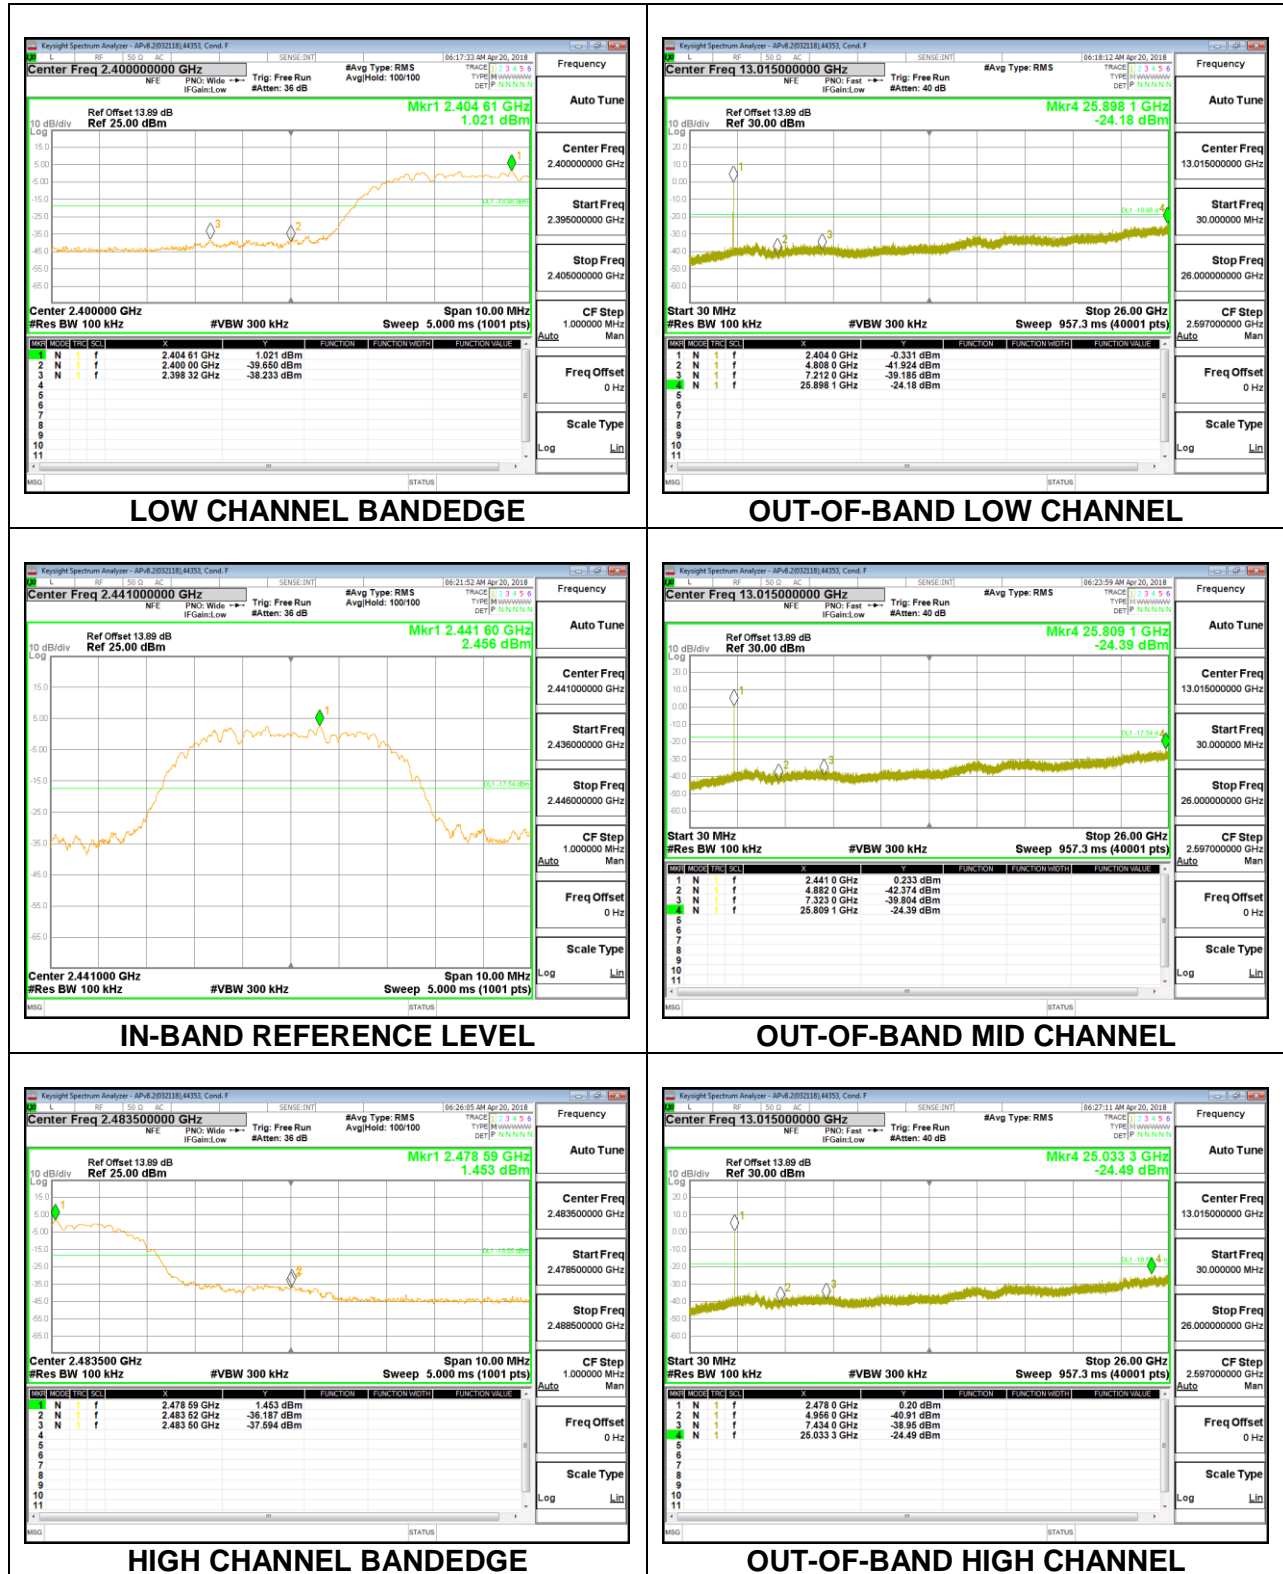


Antenna 3

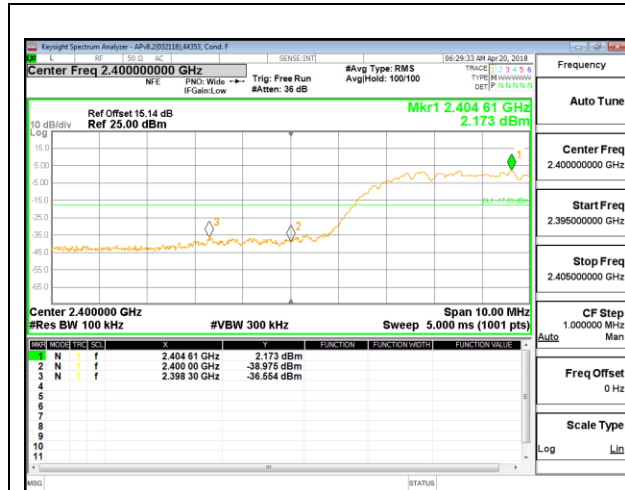


LOW CHANNEL BANDEDGE

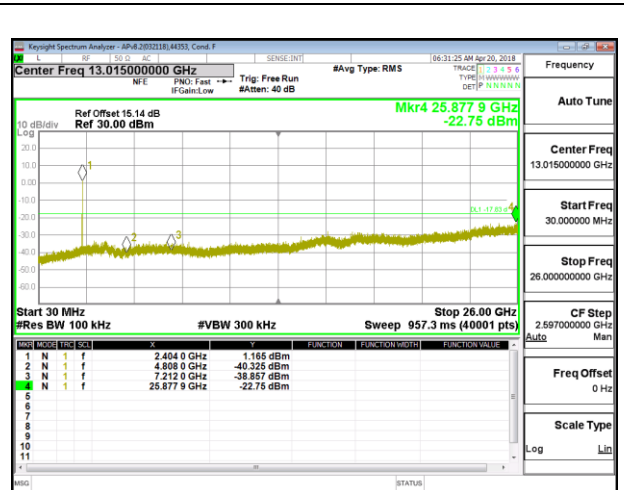


OUT-OF-BAND LOW CHANNEL

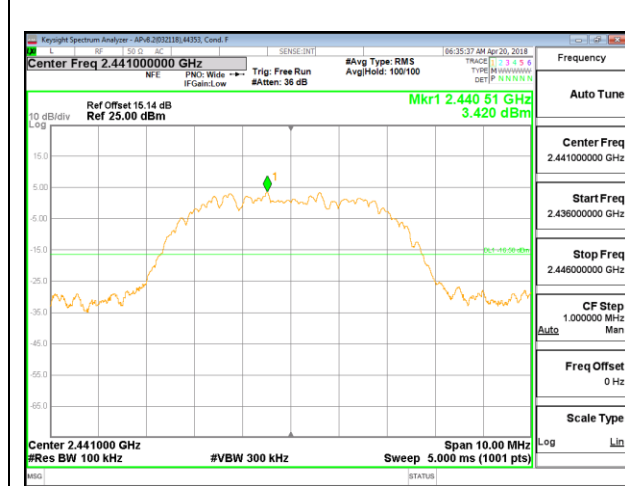


IN-BAND REFERENCE LEVEL

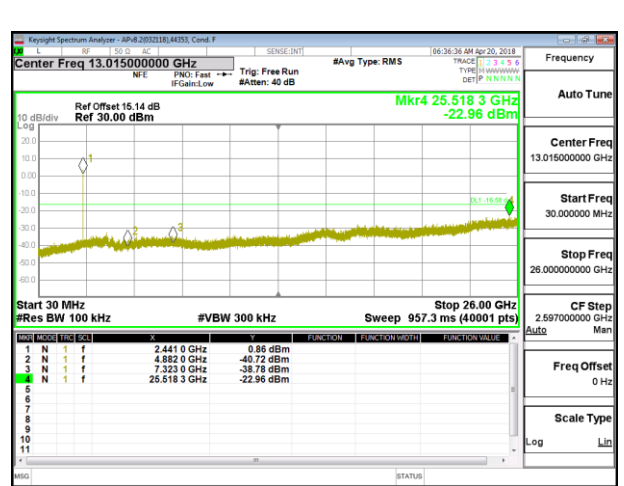

OUT-OF-BAND MID CHANNEL

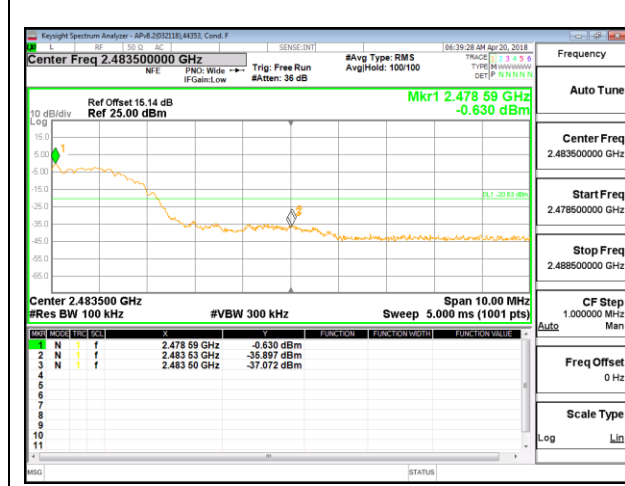

HIGH CHANNEL BANDEDGE

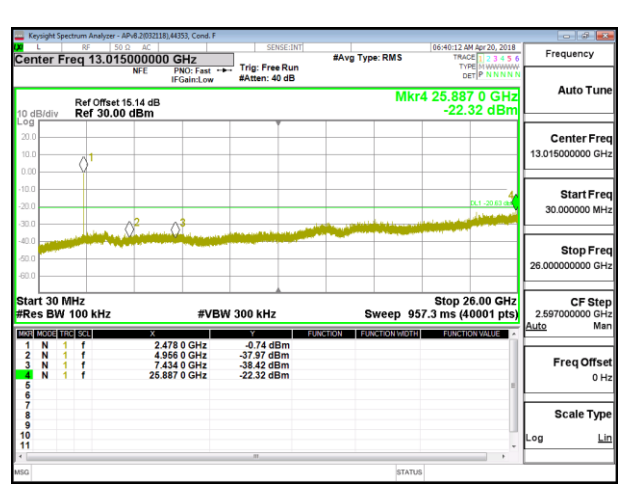

OUT-OF-BAND HIGH CHANNEL