



CERTIFICATION TEST REPORT

Report Number. : 12204524-E3V4

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2102

FCC ID : BCG-E3235A

IC : 579C-E3235A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date Of Issue:
August 13, 2018

Prepared by:
UL Verification Services Inc.
47266 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	8/7/2018	Initial Issue	Francisco Guarnero
V2	8/10/2018	Address TCB's Questions	Tri Pham
V3	8/11/2018	Address TCB's Questions	Mona Hua
V4	8/13/2018	Address TCB's Questions	Jingang Li

REPORT REVISION HISTORY	2
1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. EUT DESCRIPTION	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. SOFTWARE AND FIRMWARE.....	8
5.5. WORST-CASE CONFIGURATION AND MODE.....	9
5.6. DESCRIPTION OF TEST SETUP.....	10
6. MEASUREMENT METHOD.....	15
7. TEST AND MEASUREMENT EQUIPMENT	16
8. ANTENNA PORT TEST RESULTS	17
8.1. ON TIME AND DUTY CYCLE.....	17
8.2. 99% BANDWIDTH.....	19
8.2.1. 802.11b MODE	20
8.2.2. 802.11n HT20 MODE	24
8.2.3. 2TX Antenna 4 + Antenna 3 CDD MODE	30
8.3. 6 dB BANDWIDTH.....	35
8.3.1. 802.11b MODE	35
8.3.2. 802.11n HT20 MODE	39
8.3.3. 2TX Antenna 4 + Antenna 3 CDD MODE	45
8.4. OUTPUT POWER.....	50
8.4.1. 802.11b MODE	51
8.4.2. 802.11n HT20 MODE	53
8.4.3. 2TX Antenna 4 + Antenna 3 CDD MODE	55
8.5. POWER SPECTRAL DENSITY	56
8.5.1. 802.11b MODE	56
8.5.2. 802.11n HT20 MODE	60
8.5.3. 2TX Antenna 4 + Antenna 3 CDD MODE	66
8.6. CONDUCTED SPURIOUS EMISSIONS.....	71
8.6.1. 802.11b MODE	72
8.6.2. 802.11n HT20 MODE	76

8.6.3.	2TX Antenna 4 + Antenna 3 CDD MODE	82
9.	RADIATED TEST RESULTS.....	90
9.1.	TRANSMITTER ABOVE 1 GHz	91
9.1.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND	91
9.1.2.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND.....	123
9.1.3.	2TX Antenna 4 + Antenna 3 CDD MODE	155
9.1.	Worst Case Below 1 GHz	181
9.2.	Worst Case 18-26 GHz.....	183
10.	AC POWER LINE CONDUCTED EMISSIONS.....	185
10.1.1.	EUT POWERED BY AC/DC ADAPTER VIA USB CABLE	186
10.1.2.	EUT POWERED BY HOST PC VIA USB CABLE	188
11.	SETUP PHOTOS.....	190

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A2102

SERIAL NUMBER: C39WW011KFYQ

DATE TESTED: MARCH 24, 2018 – AUGUST 14, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
CONSUMER TECHNOLOGY DIVISION
Senior Engineer
UL Verification Services Inc.

Prepared By:



Tony Li
CONSUMER TECHNOLOGY DIVISION
Lab Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v04, ANSI C63.10-2013, RSS-GEN Issue 5, and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (ISED:2324B-1)	☒ Chamber D (ISED:22541-1)
☐ Chamber B (ISED:2324B-2)	☒ Chamber E (ISED:22541-2)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)
	☐ Chamber G (ISED:22541-4)
	☐ Chamber H (ISED:22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under ISED company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at [NVLAP Lab Search](#).

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The Apple iPhone, is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac, Bluetooth, GPS and NFC. All models support at least one UICC based SIM. The second SIM is either UICC based, electronic SIM (e-SIM), or second SIM is not present. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

2.4GHz BAND

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
1Tx			
2412 - 2462	802.11b	21.90	154.88
2412 - 2462	802.11g	Covered by 11n HT20	
2412 - 2462	802.11n HT20	21.62	145.21

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2Tx			
2412 - 2462	802.11n HT20 CDD	24.29	268.53

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	Ant. 4 (dBi)	Ant. 3 (dBi)
2.4	-2.3	-4.8

5.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was WL FW: 16.30.101

5.5. WORST-CASE CONFIGURATION AND MODE

EUT was investigated in three orthogonal orientations X, Y and Z on Ant 4 (Antenna 4) and Ant 3 (Antenna 3), it was determined that X (Flatbed) orientation was worst-case orientation for Ant 4 and Z (Portrait) orientation was worst-case orientation for Ant 3 and X (Flatbed) orientation was worst-case orientation for 2TX CDD mode.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario.

For HT20 modes, radiated harmonics spurious were performed with the EUT set at the 2TX CDD mode with power setting equal or higher than SISO modes as the worst-case scenario. G mode covered by HT20 mode since it has the same power as HT20.

Below 1GHz tests were performed with EUT connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop. There were no emissions found below 30MHz within 20dB of the limit.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11n HT20mode: MCS0

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
laptop	Apple	Macbook Pro	C02P41RZG086	FCC DoC
Laptop AC/DC adapter	Liteon Technology	PA-1450-BA1	B123	NA
EUT AC Adapter	Apple	A1385	D292365CDYADHLHC3	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						


I/O CABLES (BELOW 1GHz AND AC POWER LINE TEST WITH ADAPTER AND LAPTOP)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A

TEST SETUP CONDUCTED PORT

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

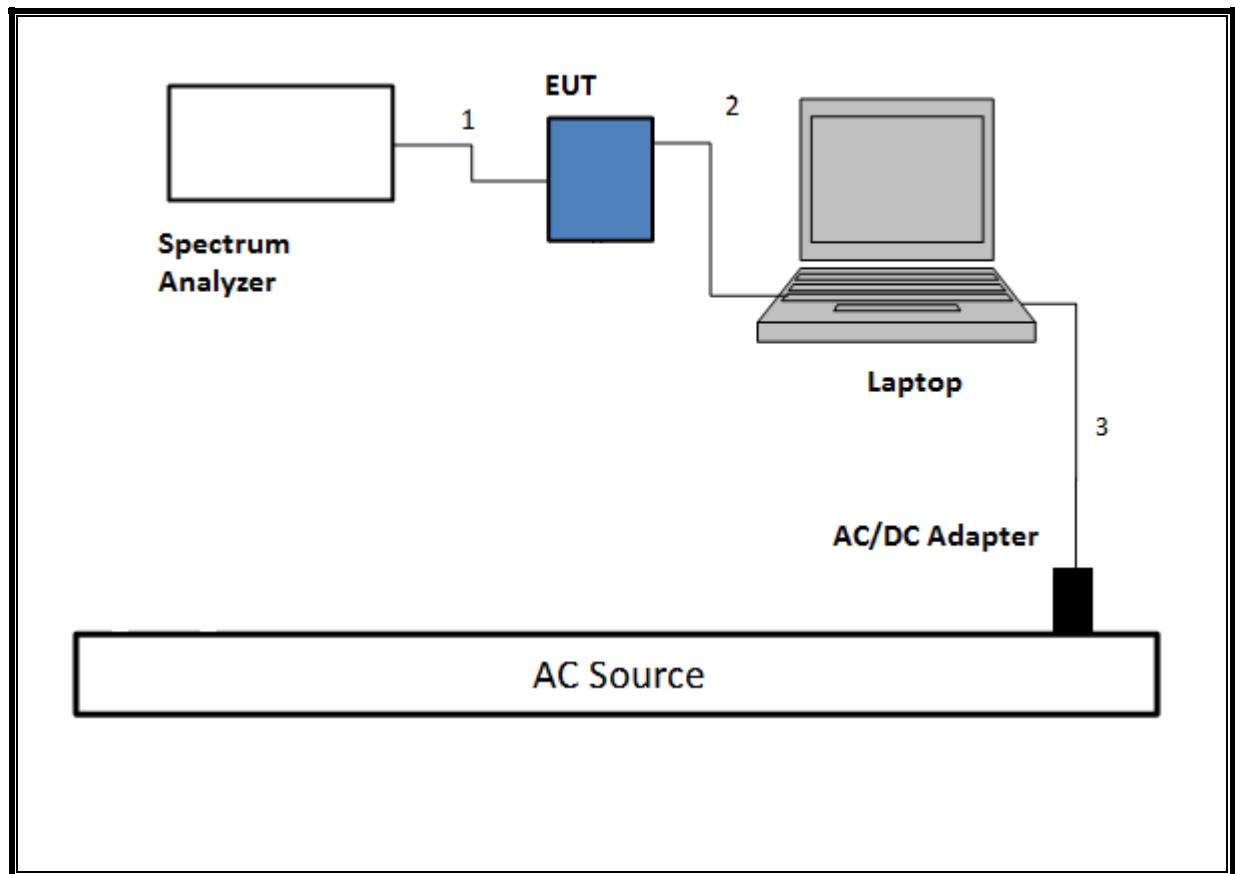

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by Battery. Test software exercised the EUT.


SETUP DIAGRAM

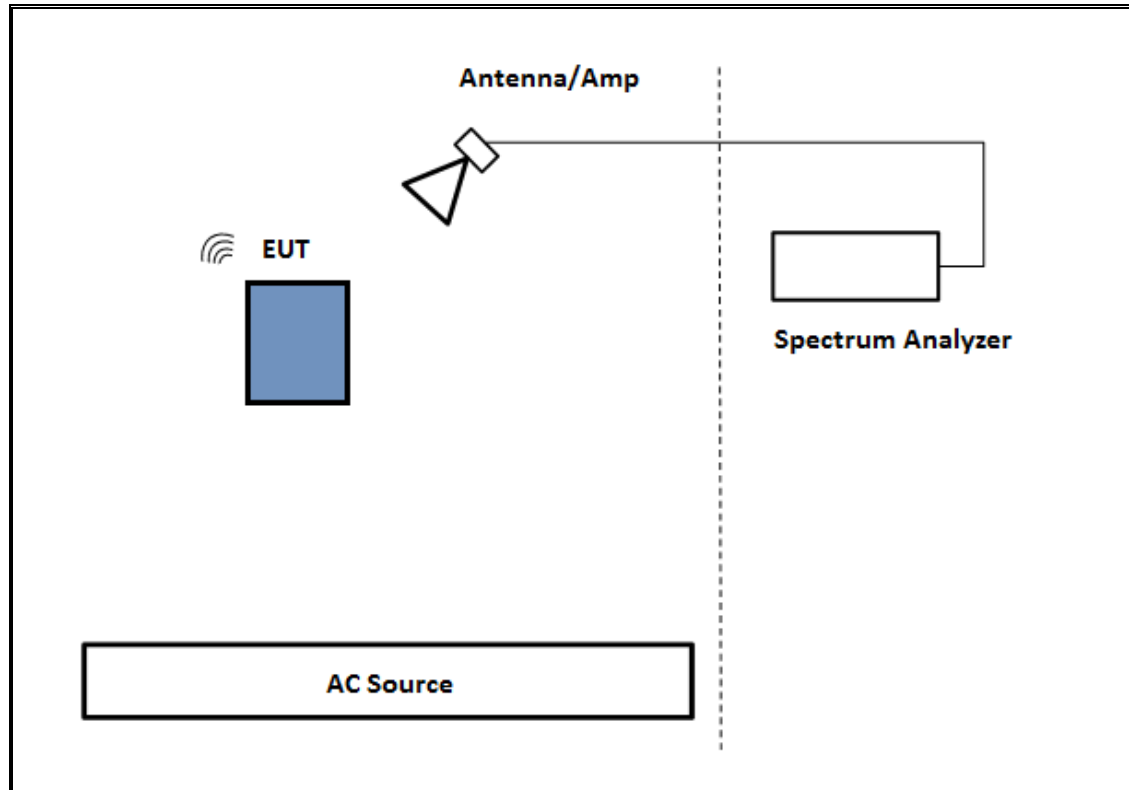


TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS

The EUT was powered by AC cord. Test software exercised the EUT.

SETUP DIAGRAM

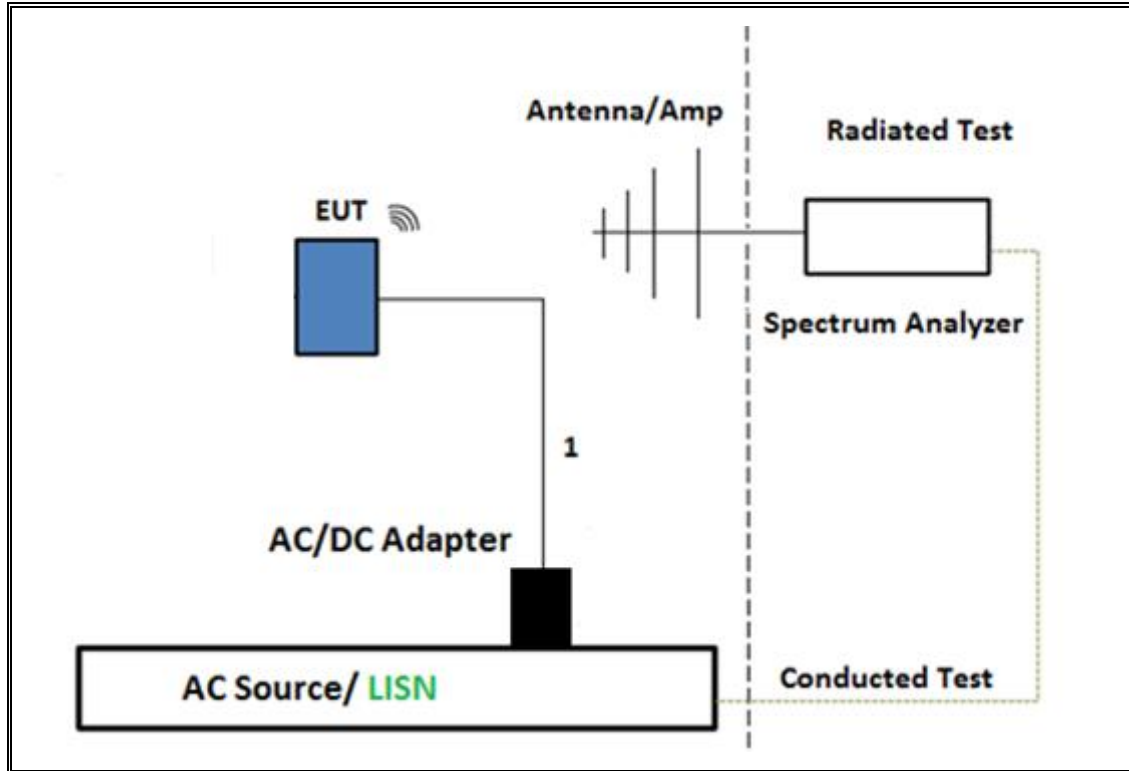

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

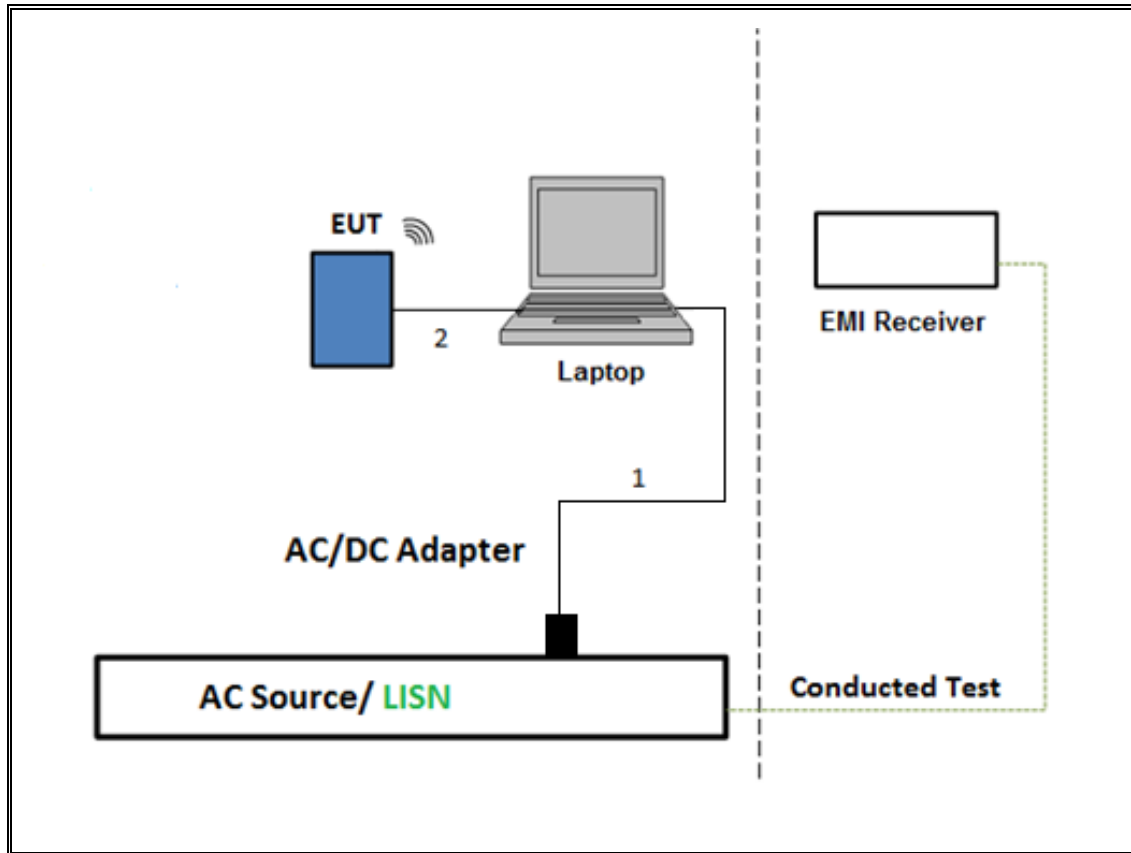

6. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 558074 D01 v04, Section 6.

6 dB BW: KDB 558074 D01 v04, Section 8.1.

99% BW: ANSI C63.10-2013, Section 6.9.3.

Output Power: KDB 558074 D01 v04, Section 9.2.3.2.

Power Spectral Density: KDB 558074 D01 v04, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v04, Section 11.1 (b).

Out-of-band emissions in restricted bands: KDB 558074 D01 v04, Section 12.1.

Band-edge: KDB 558074 D01 v04, Section 12.1.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due
*Antenna, Horn 1-18GHz	ETS Lindgren	3117	T136	06/26/2018
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	T185	04/19/2019
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T835	12/15/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T740	12/30/2018
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	12/15/2018
*Antenna, Horn 1-18GHz	ETS Lindgren	3117	T346	03/28/2018
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T346	04/03/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T741	12/30/2018
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T906	02/16/2019
Power Meter, P-series single channel	Agilent (Keysight) Technologies	N1911A	T227	10/27/2018
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	04/3/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T742	12/04/2018
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T862	05/24/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T1165	06/12/2019
Spectrum Analyzer, PSA, 3Hz to 44GHz	Agilent (Keysight) Technologies	E4446A	T177	04/12/2019
Antenna, Active Loop 9KHz to 30MHz	ETS-Lindgren	6502	T757	09/14/2018
Power Meter, P-series single channel	Agilent (Keysight) Technologies	N1911A	T227	10/27/2018
Power Sensor	Keysight	N1921A	T1226	08/30/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1454	01/08/2019
Antenna Horn 18 to 26.5GHz	ARA	MWH-1826/B	T449	06/29/2019
*Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	07/23/2018
AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	01/25/2019
Power Cable, Line Conducted Emissions	UL	PG1	T861	08/31/2018
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/15/2018
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

Note: *Testing is completed before equipment expiration date.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

PROCEDURE


KDB 789033 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS


Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
802.11b 1TX	2.496	2.517	0.992	99.17%	0.00	0.010
802.11n HT20 1TX	1.920	1.943	0.988	98.82%	0.00	0.010
802.11n HT20 CDD	2.219	2.240	0.991	99.06%	0.00	0.010

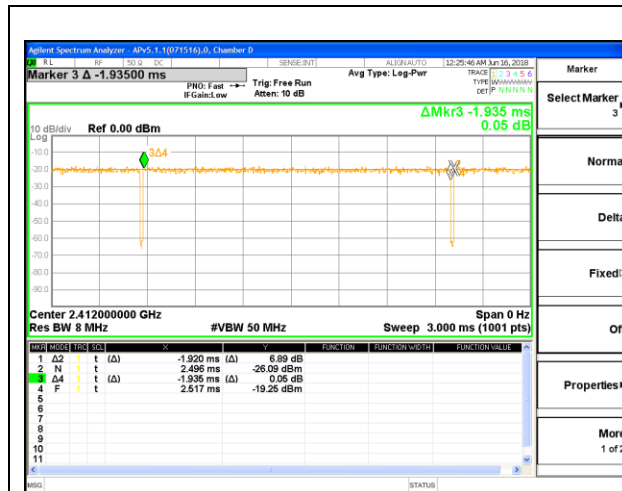

DUTY CYCLE 802.11b 1TX MODE

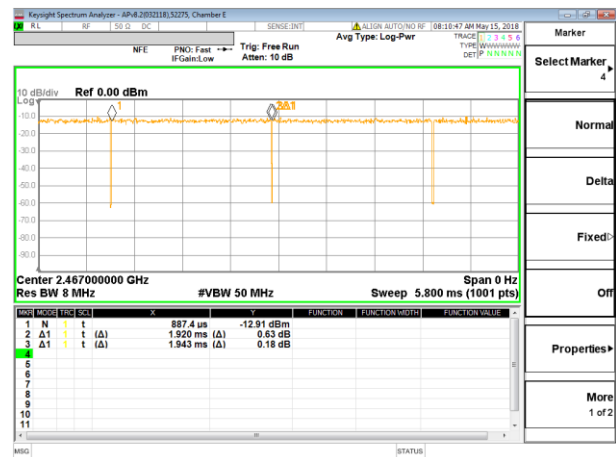

DUTY CYCLE 802.11n HT20 1TX MODE

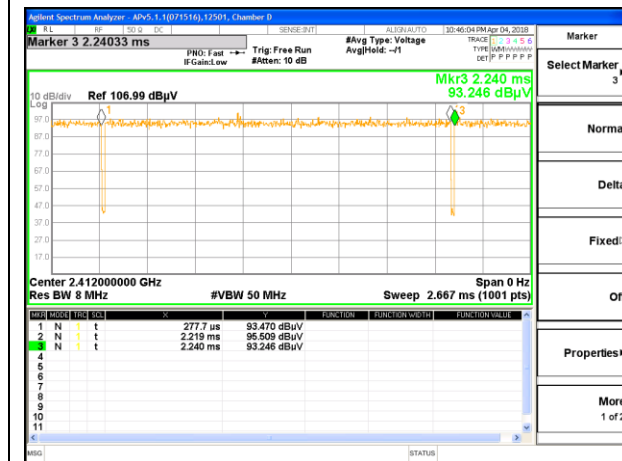

DUTY CYCLE 802.11n HT20 CDD MODE

8.2. 99% BANDWIDTH

LIMITS


None; for reporting purposes only.

RESULTS


8.2.1. 802.11b MODE

1TX Antenna 4 MODE


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	12.975
Low 2	2417	13.012
Mid 6	2437	13.342
High 11	2462	13.510
High 12	2467	13.363
High 13	2472	13.181

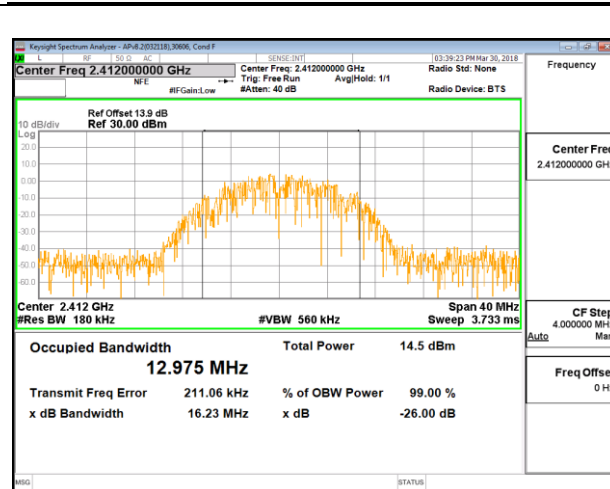


LOW CHANNEL 1

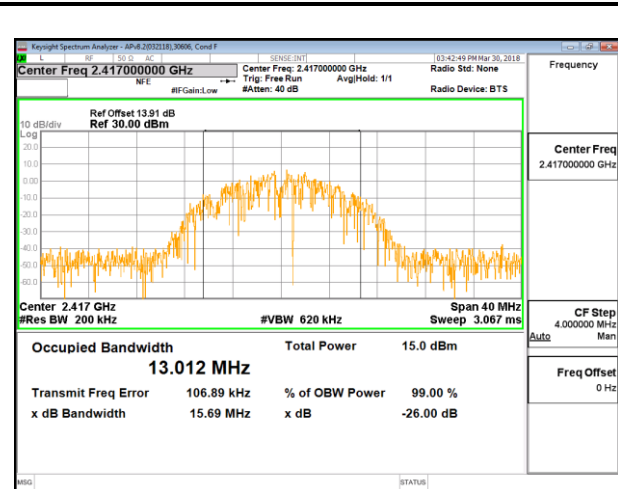


LOW CHANNEL 2

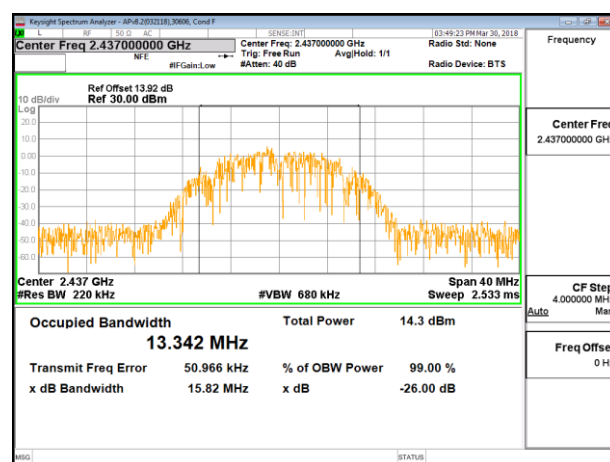


MID CHANNEL 6

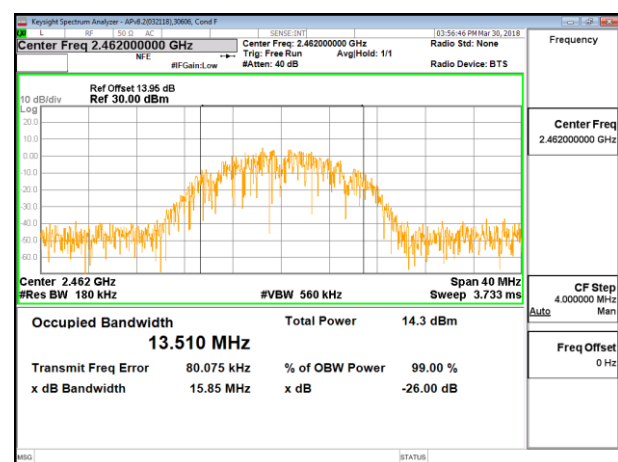

HIGH CHANNEL 11

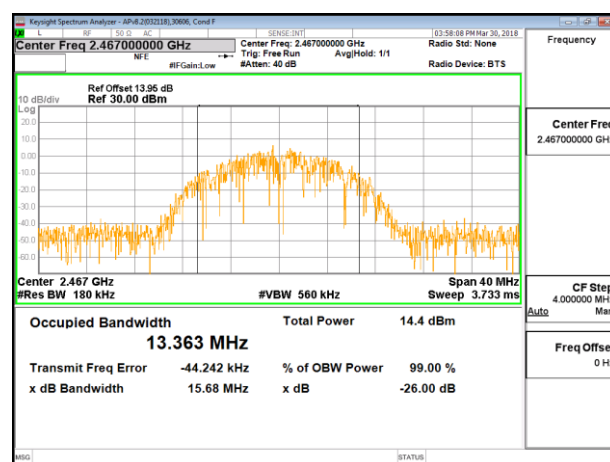


HIGH CHANNEL 12

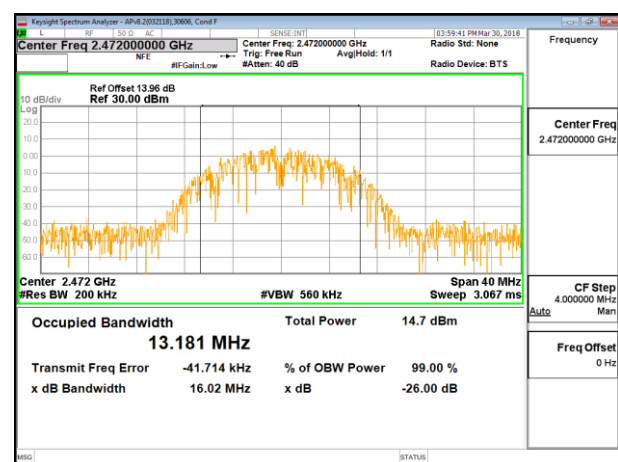


HIGH CHANNEL 13

1TX Antenna 3 MODE


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	13.177
Low 2	2417	12.920
Mid 6	2437	13.075
High 11	2462	13.396
High 12	2467	13.039
High 13	2472	13.211

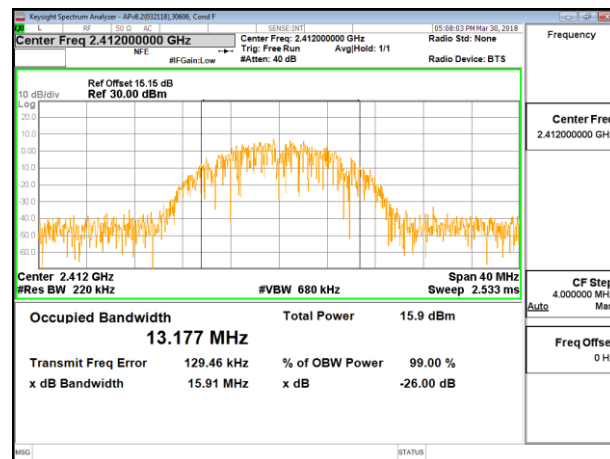


LOW CHANNEL 1

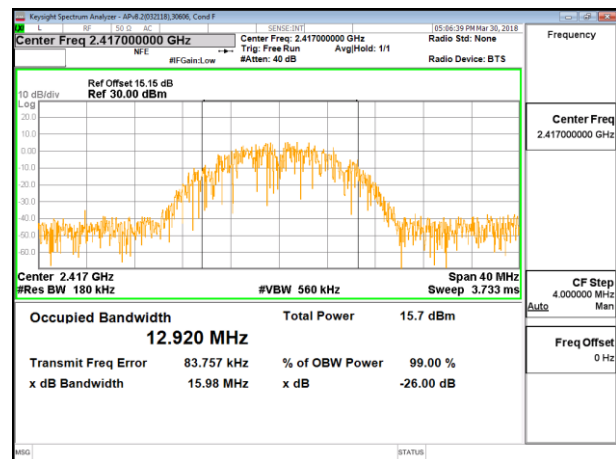


LOW CHANNEL 2

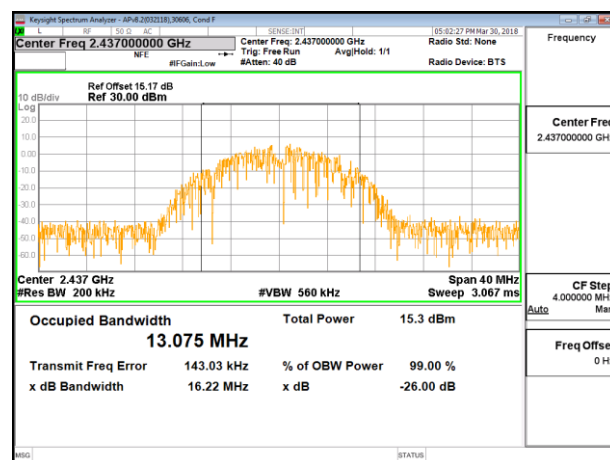


MID CHANNEL 6

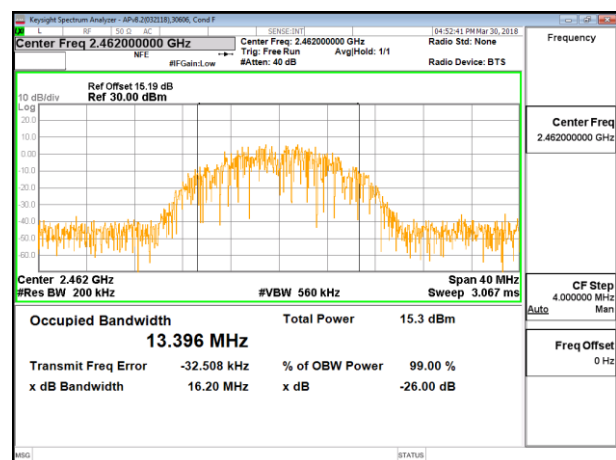

HIGH CHANNEL 11

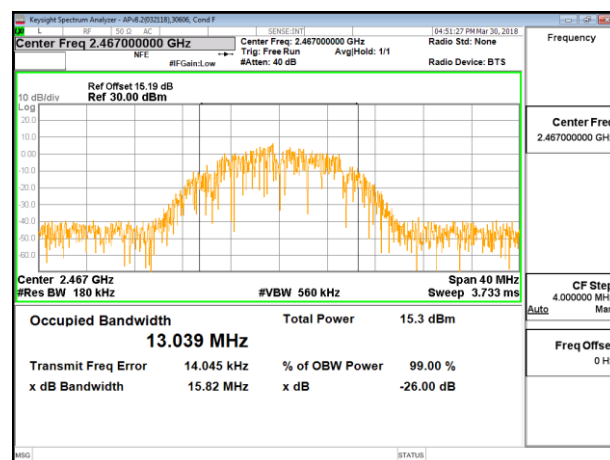

HIGH CHANNEL 12

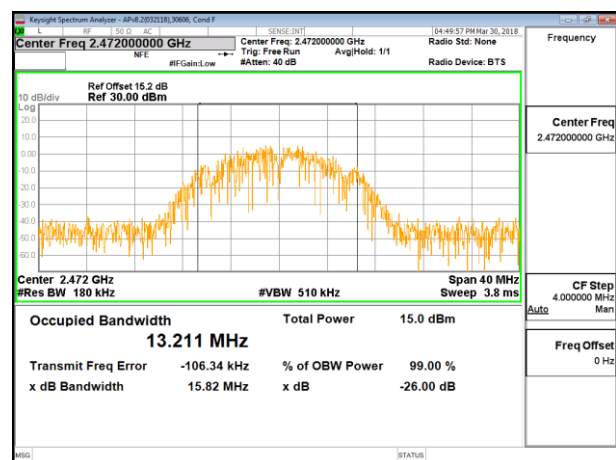


HIGH CHANNEL 13


8.2.2. 802.11n HT20 MODE

1TX Antenna 4 MODE


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	16.694
Low 2	2417	16.500
Low 3	2422	16.596
Mid 6	2437	16.605
High 9	2452	16.545
High 10	2457	16.639
High 11	2462	16.476
High 12	2467	16.507
High 13	2472	16.490

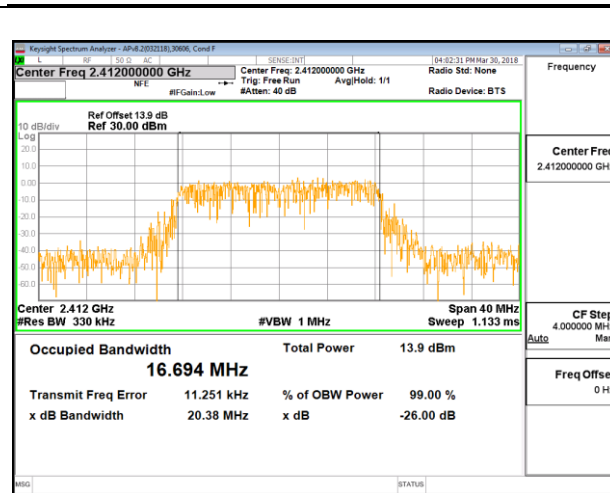


LOW CHANNEL 1

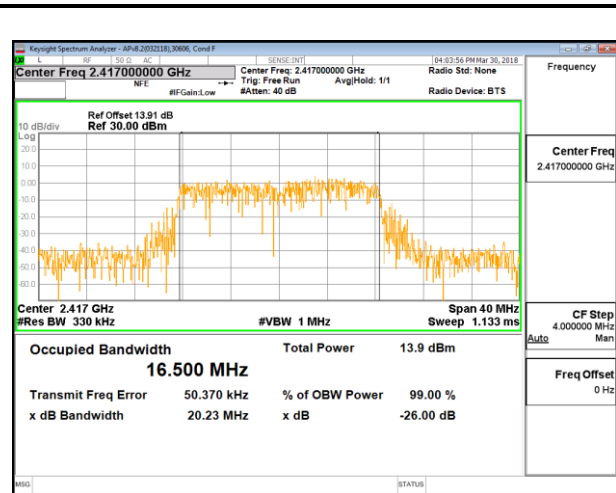


LOW CHANNEL 2

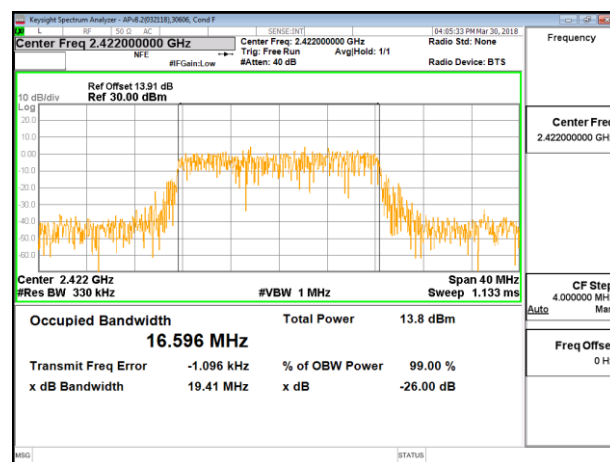


LOW CHANNEL 3

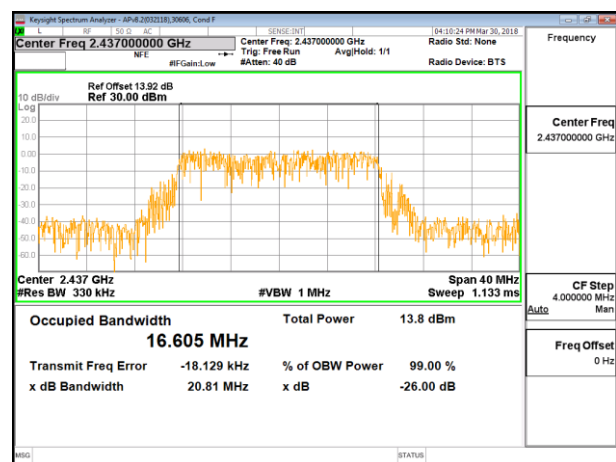


MID CHANNEL 6

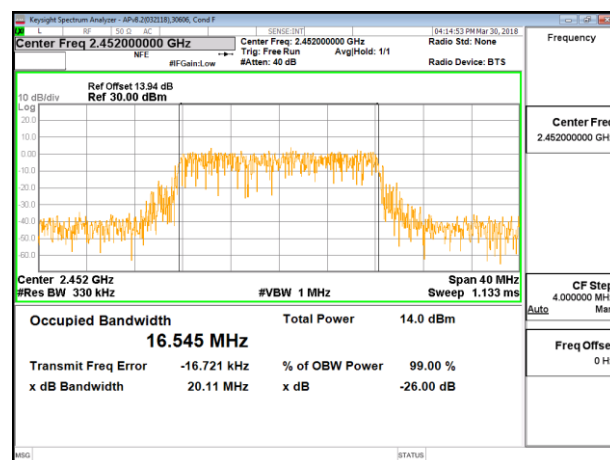


HIGH CHANNEL 9

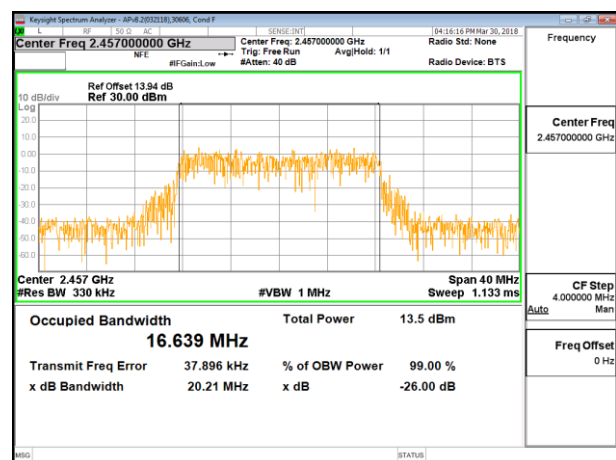


HIGH CHANNEL 10

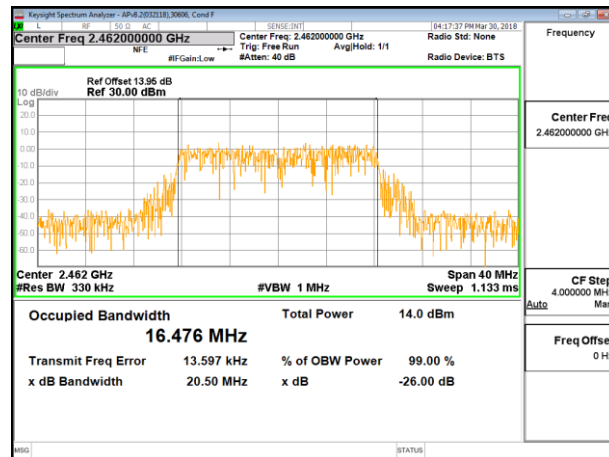

HIGH CHANNEL 11

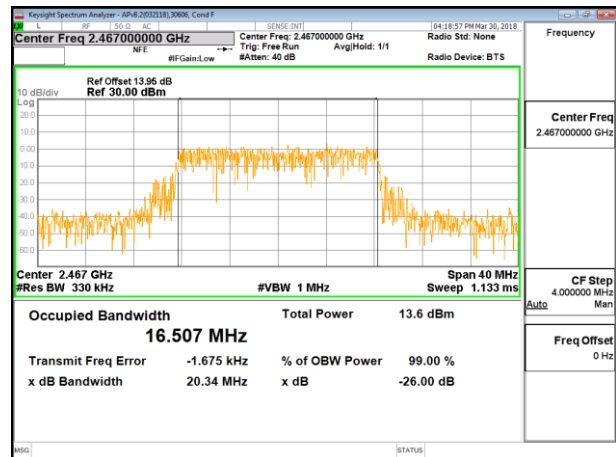

HIGH CHANNEL 12

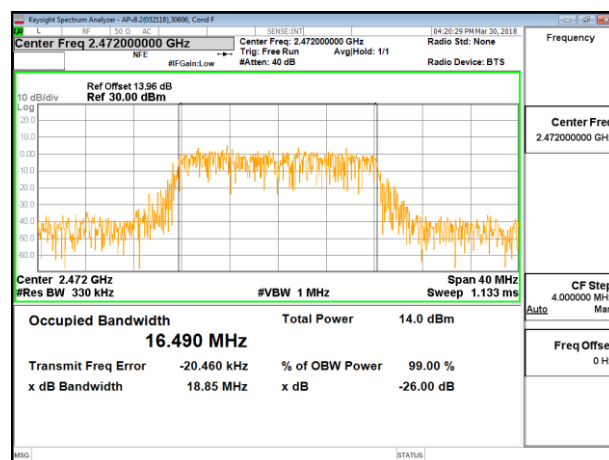


HIGH CHANNEL 13


1TX Antenna 3 MODE

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 1	2412	16.562
Low 2	2417	16.529
Low 3	2422	16.592
Mid 6	2437	16.581
High 9	2452	16.573
High 10	2457	16.677
High 11	2462	16.590
High 12	2467	16.622
High 13	2472	16.509




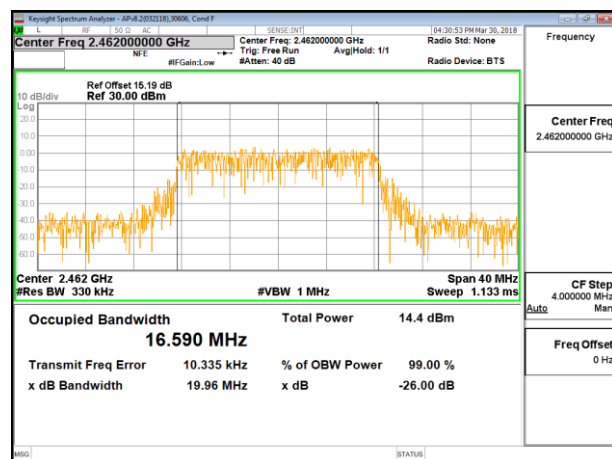

HIGH CHANNEL 11

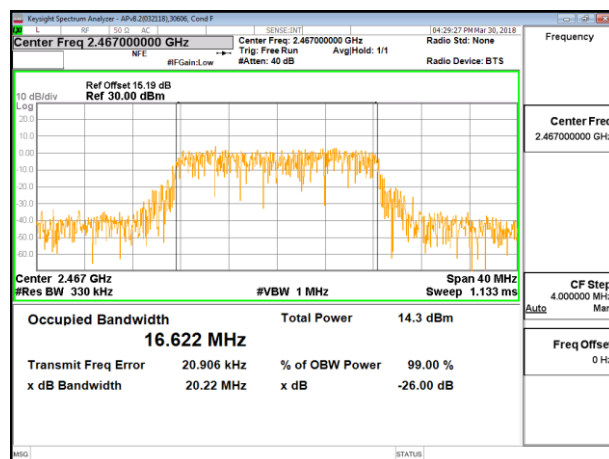

HIGH CHANNEL 12

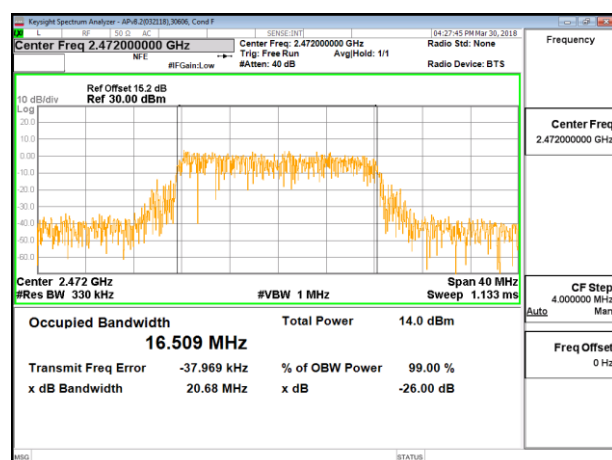

HIGH CHANNEL 13


8.2.3. 2TX Antenna 4 + Antenna 3 CDD MODE

Channel	Frequency (MHz)	99% Bandwidth Antenna 4 (MHz)	99% Bandwidth Antenna 3 (MHz)
Low 1	2412	16.609	16.500
Low 2	2417	16.641	16.535
Low 3	2422	16.601	16.461
Low 4	2427	16.575	16.528
Mid 6	2437	16.686	16.493
High 8	2447	16.617	16.570
High 9	2452	16.606	16.558
High 10	2457	16.631	16.538
High 11	2462	16.579	16.455
High 12	2467	16.577	16.581
High 13	2472	16.469	16.461


LOW CHANNEL 1




LOW CHANNEL 2

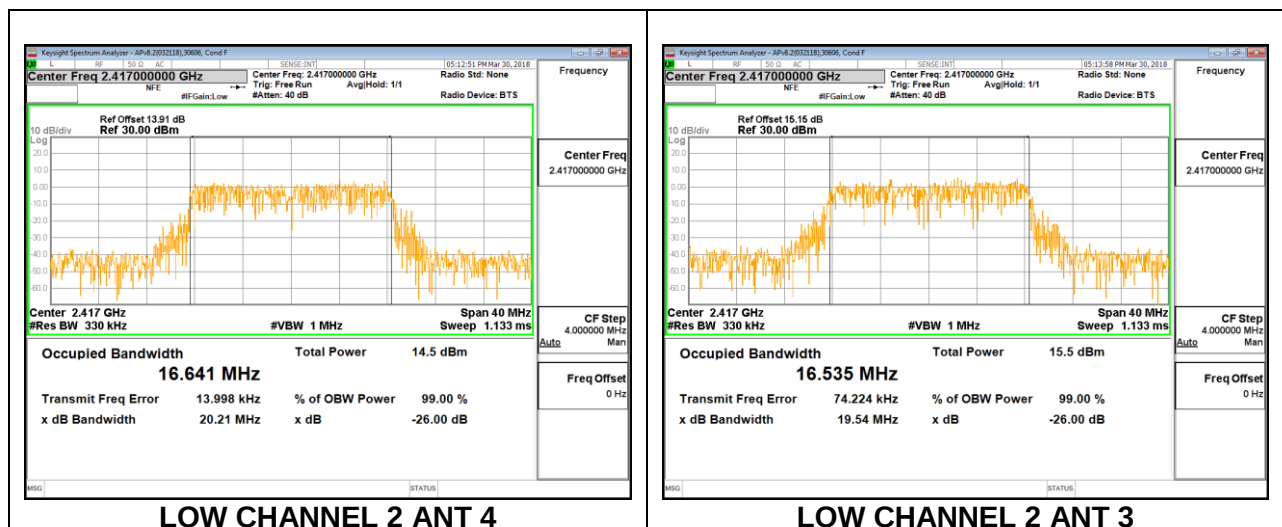


LOW CHANNEL 3

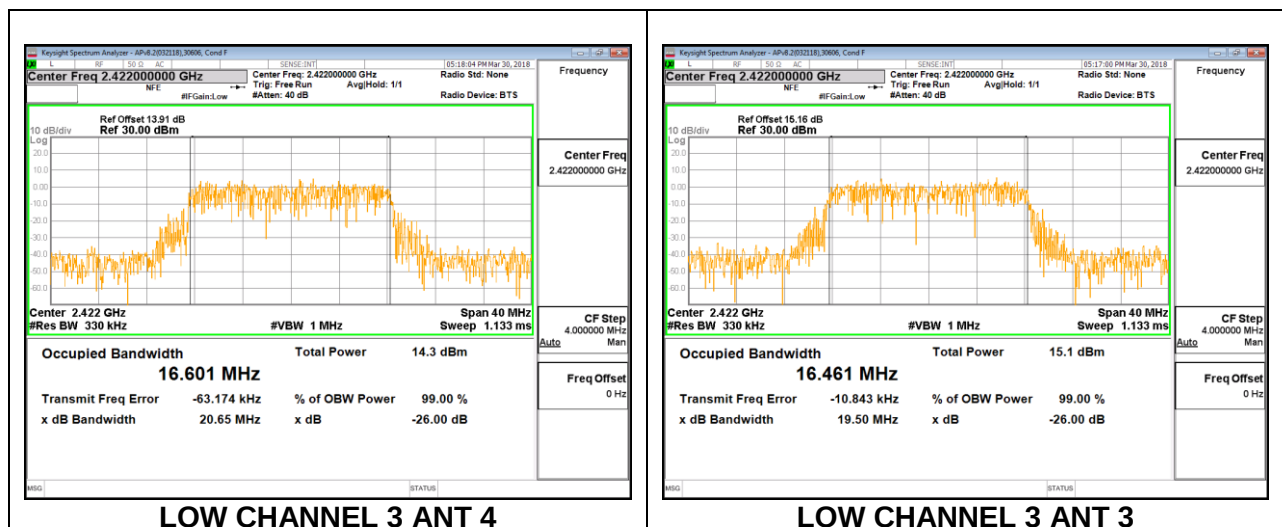


LOW CHANNEL 4

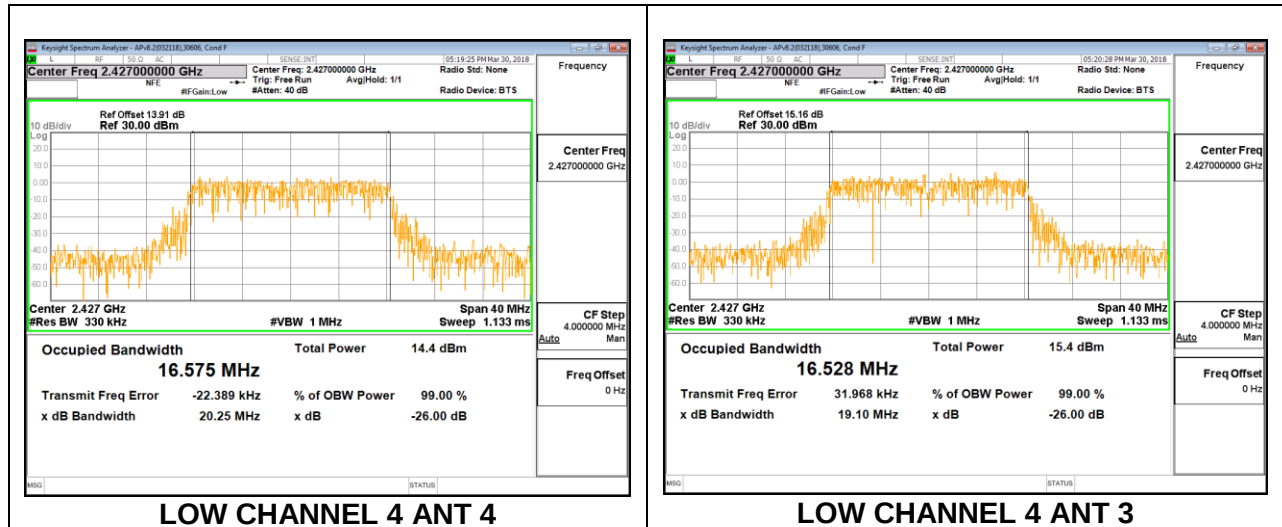


MID CHANNEL 6

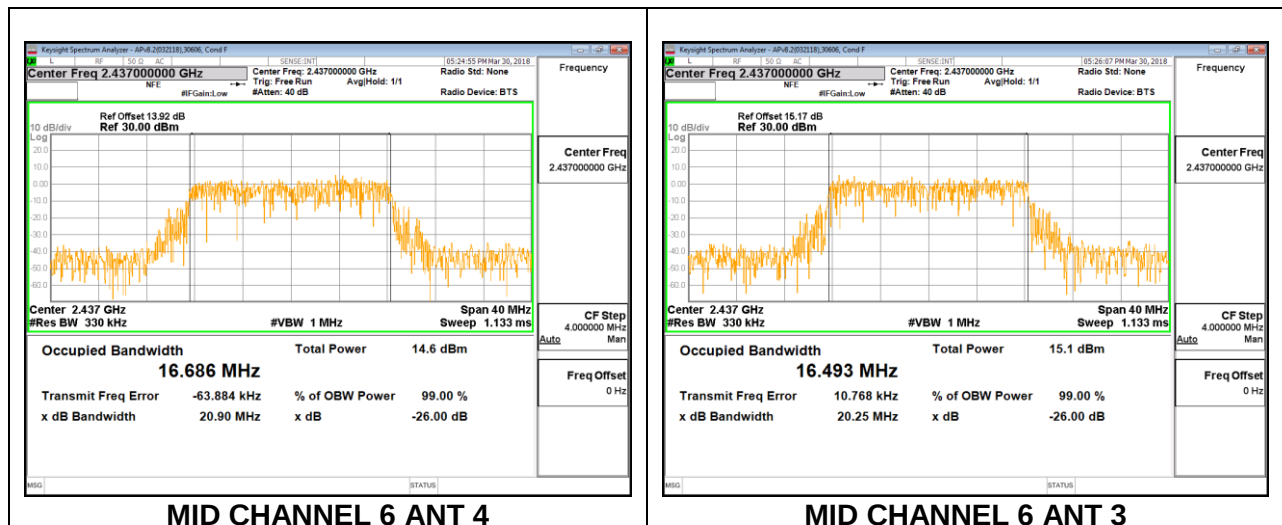


LOW CHANNEL 8

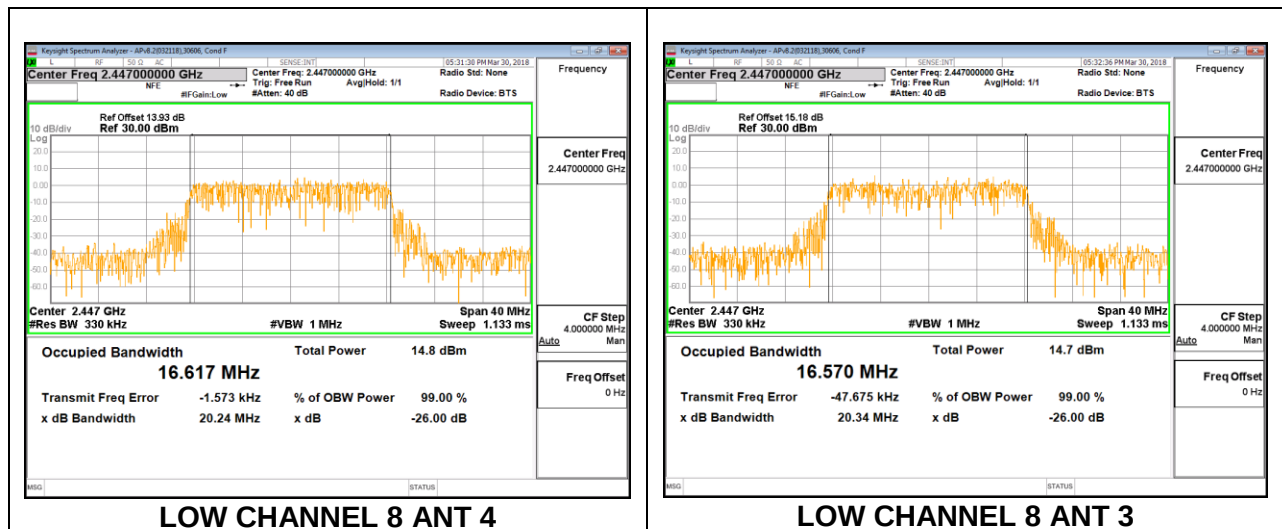

HIGH CHANNEL 9

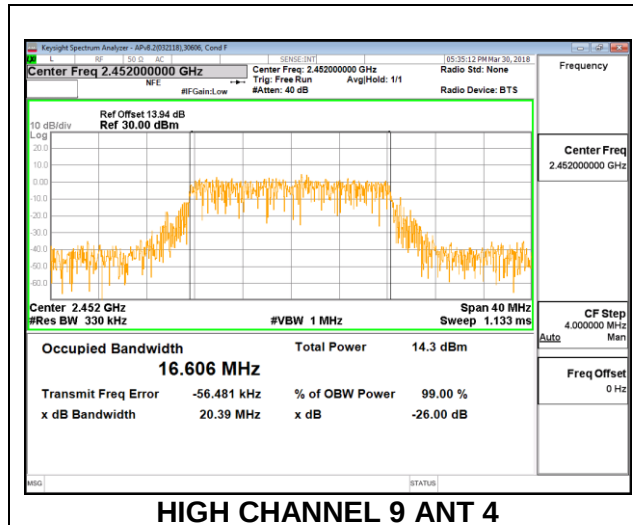


HIGH CHANNEL 9 ANT 4

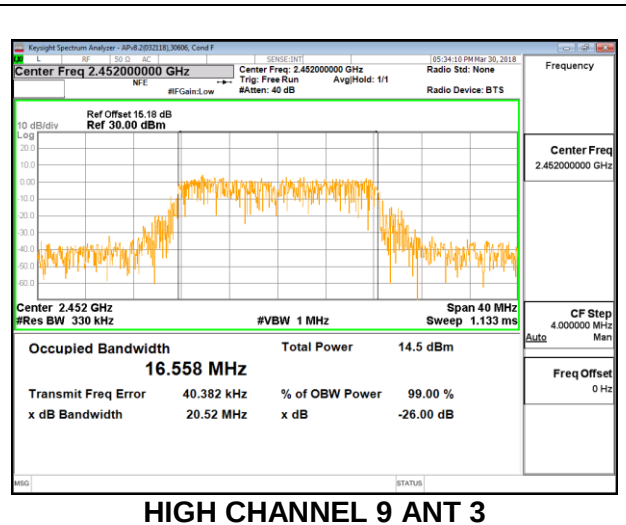


HIGH CHANNEL 9 ANT 3

HIGH CHANNEL 10

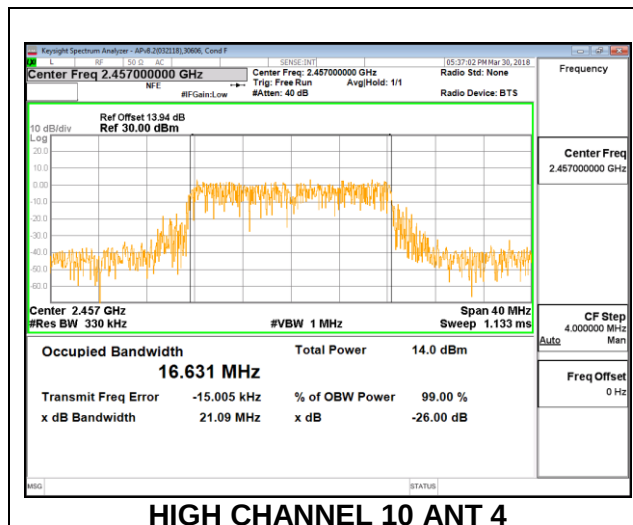


HIGH CHANNEL 10 ANT 4

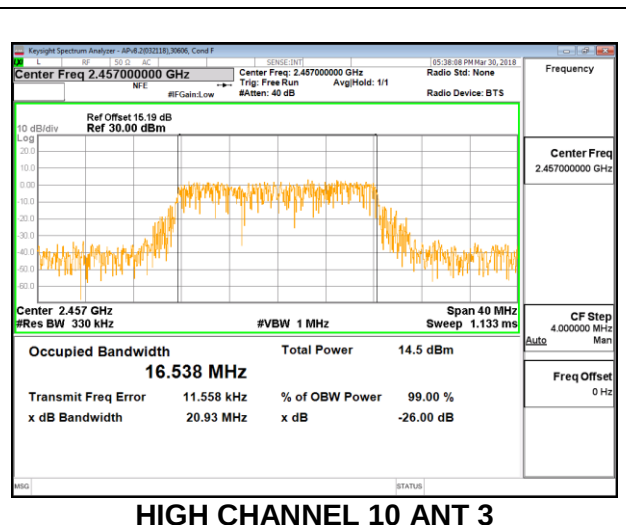


HIGH CHANNEL 10 ANT 3

HIGH CHANNEL 11

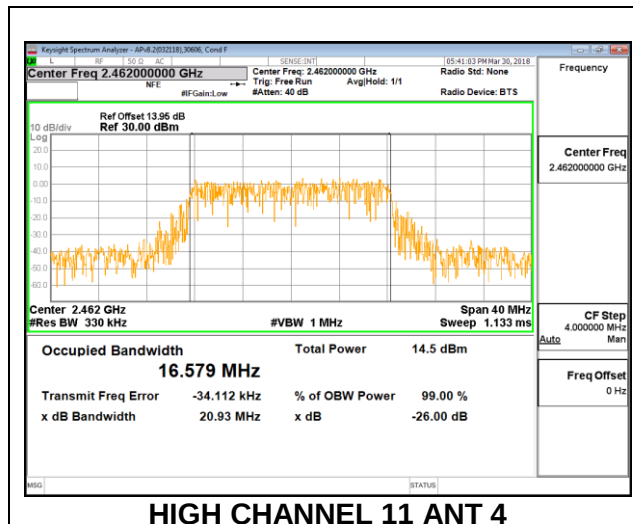


HIGH CHANNEL 11 ANT 4

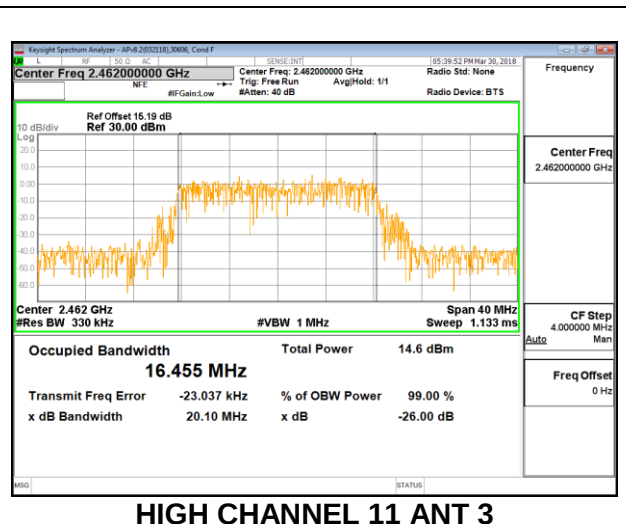


HIGH CHANNEL 11 ANT 3

HIGH CHANNEL 12

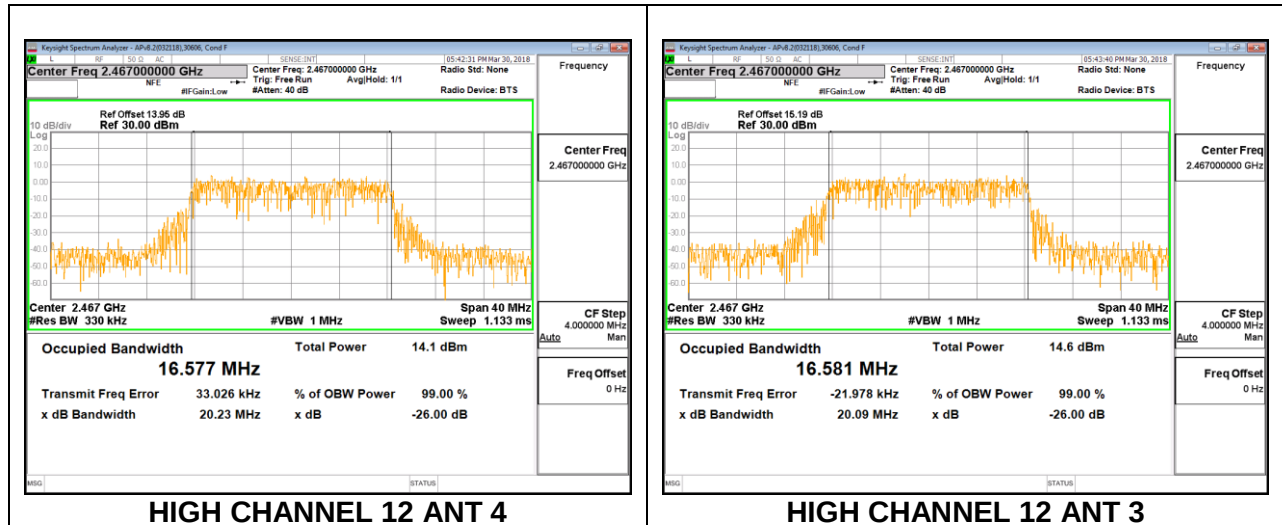

HIGH CHANNEL 13

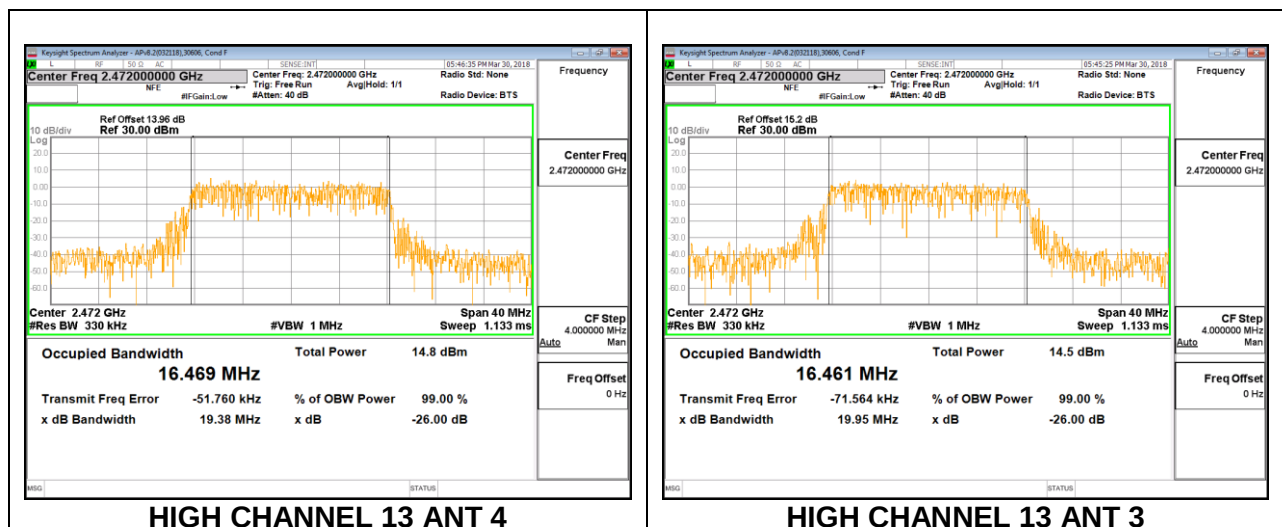

8.3. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

8.3.1. 802.11b MODE

1TX Antenna 4 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	8.080	0.5
Low 2	2417	8.600	0.5
Mid 6	2437	7.600	0.5
High 11	2462	7.160	0.5
High 12	2467	7.160	0.5
High 13	2472	7.560	0.5

