



CERTIFICATION TEST REPORT

Report Number. : 12216366-E11V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2105

FCC ID : BCG-E3237A

IC : 579C-E3237A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 9

Date Of Issue:
August 27, 2018

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	08/21/2018	Initial Issue	Chin Pang
V2	08/27/2018	Address TCB Question	Joe Vang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. WORST-CASE CONFIGURATION AND MODE.....	8
5.4. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	12
7. OCCUPIED BANDWIDTH	13
7.1. CE MODE.....	14
7.2. READER MODE	15
8. RADIATED EMISSION TEST RESULTS.....	16
8.1. LIMITS AND PROCEDURE.....	16
8.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 - 30 MHz), EUT WITH AC/DC ADAPTER	18
8.2.1. CE MODE.....	18
8.2.2. READER MODE	21
8.3. TX SPURIOUS EMISSION 30 TO 1000 MHz, EUT WITH AC/DC ADAPTER.....	24
8.3.1. CE MODE.....	24
8.3.2. READER MODE	26
9. FREQUENCY STABILITY	28
9.1. CE MODE.....	29
9.2. READER MODE	29
10. AC MAINS LINE CONDUCTED EMISSIONS	30
10.1. CE MODE	31
10.1.1. NORMAL OPERATION, 848Kbps	31
10.1.2. NORMAL OPERATION WITH ANTENNA PORT TERMINATED, 848Kbps.....	33
10.2. READER MODE.....	35
10.2.1. NORMAL OPERATION, 848Kbps	35

10.2.2.	NORMAL OPERATION WITH ANTENNA PORT TERMINATED, 848Kbps.....	37
11.	SETUP PHOTOS	39

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A2105

SERIAL NUMBER: C7CWN00TK3MD

DATE TESTED: MAY 24 – JULY 13, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies
ISED RSS-210 Issue 9, Annex B	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Test Engineer
UL VERIFICATION SERVICES INC.

Prepared By:



Tony Wang
LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 5, and RSS-210 Issue 9.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
☒ Chamber A (ISED:2324B-1)	☒ Chamber D (ISED:22541-1)	☐ Chamber K (ISED:2324A-1)
☐ Chamber B (ISED:2324B-2)	☒ Chamber E (ISED:22541-2)	☐ Chamber L (ISED:2324A-3)
☐ Chamber C (ISED:2324B-3)	☒ Chamber F (ISED:22541-3)	
	☐ Chamber G (ISED:22541-4)	
	☐ Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under ISED Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively. Chambers K and L are covered under ISED company address code 2324A with site numbers 2324A-1 and 2324A-3, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at [NVLAP Lab Search](#).

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Apple iPhone, is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac, Bluetooth, GPS and NFC. All models support at least one UICC based SIM. The second SIM is either UICC based, electronic SIM (e-SIM), or second SIM is not present. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak radiated magnetic field strength as follows:

Frequency Range (MHz)	Mode		Kbps	E Field at 30m distance (dBuV/m)
13.56	Type A	CE	848	25.63
		Reader	848	27.24

5.3. WORST-CASE CONFIGURATION AND MODE

The fundamental of the EUT was investigated under three orthogonal orientations X (Flatbed), Y (Landscape), and Z (Portrait). The Y(Landscape orientation) was determined to be the worst-case orientation.

EUT was investigated with RX antenna Face-on, Face-off and horizontal(parallel to ground). The worst case position of the EUT was investigated under two configurations: EUT with power supply, EUT with earphones. The EUT with power supply configuration was determined to be worst-case configurations on RX antenna Face-on and Face-off; therefore, all final tests were performed on the EUT with power supply.

In addition, Type A, B and F with CE mode and Reader mode data rates and ISO 15693 were investigated to determine the worst case based on the highest power and spurious emissions. Type A was determined to be the worst case and therefore Type A was selected for all final tests.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	Mac Book Pro	C02PM012G3QD	FCC DoC
Laptop AC/DC Adapter	Apple	85W MagSAfe Power adapter	A1286	N/A
EUT AC/DC Adapter	Apple	A1385	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-Shielded	1	N/A


TEST SETUP

The EUT is installed in a host laptop computer during the tests. Test software exercised the EUT.

SETUP DIAGRAM FOR RADIATED TESTS

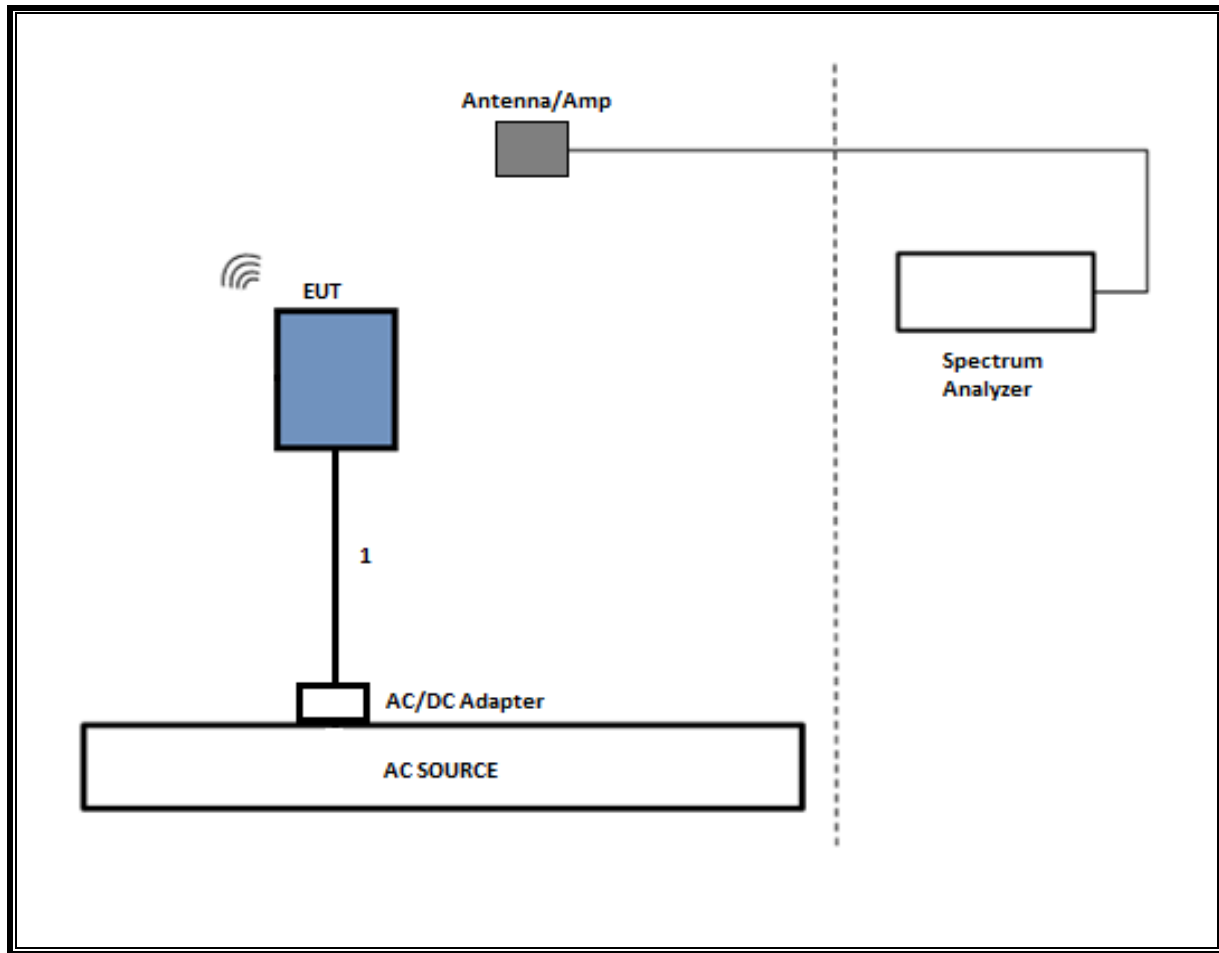

SETUP DIAGRAM FOR AC LINE CONDUCTED TESTS

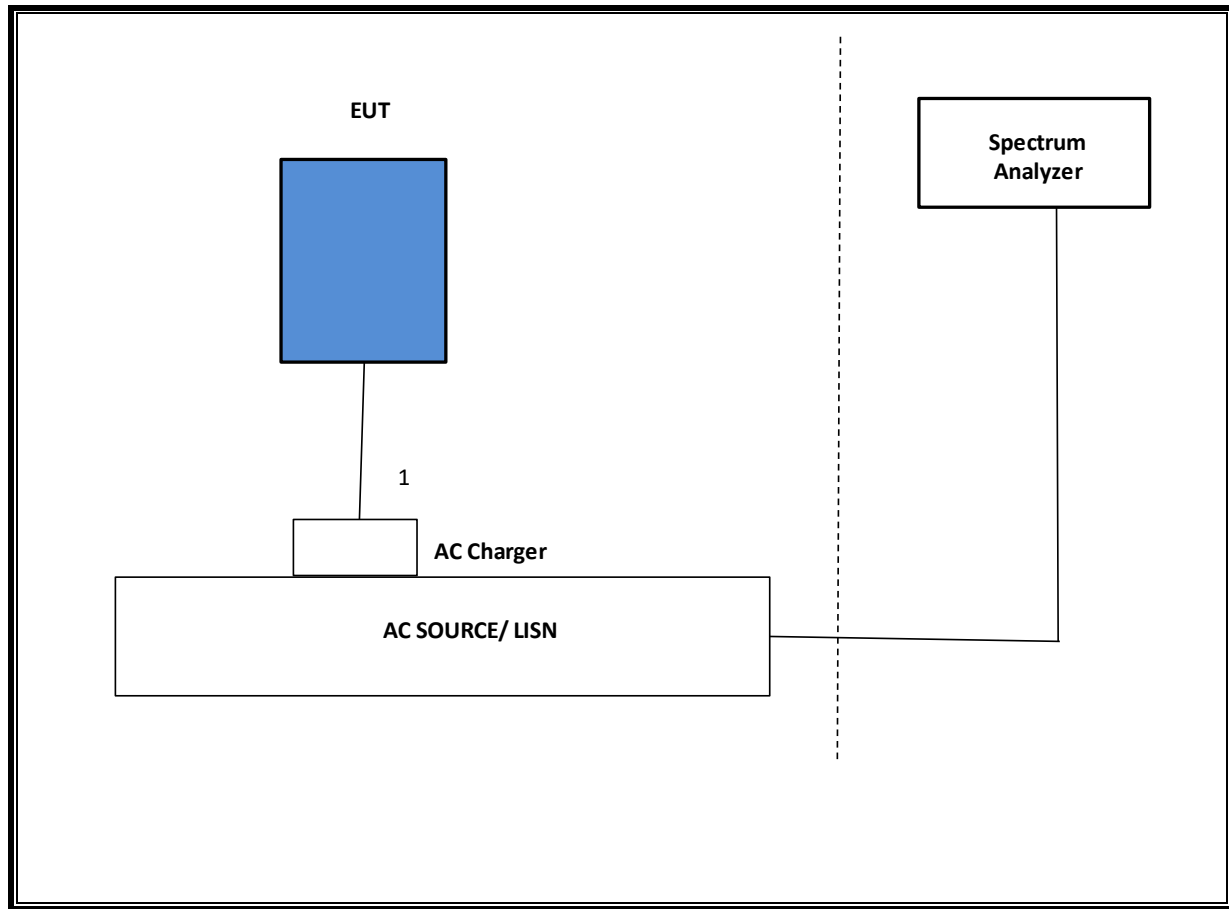

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T408	12/15/2018
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T173	06/24/2018
**Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T173	07/06/2019
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T342	02/22/2019
Spectrum Analyzer, PSA, 3Hz to 44GHz	Agilent (Keysight) Technologies	E4446A	T177	04/12/2019
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	12/15/2018
Antenna, Active Loop 9KHz to 30MHz	EMCO	6502	T35	12/15/2018
Chamber, Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCTWC	T1154	09/05/2018
Antenna, Active Loop 9KHz to 30MHz	EMCO	6502	T1616	09/14/2018
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T906	02/16/2019

AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	01/25/2019
Power Cable, Line Conducted Emissions	UL	PG1	T861	08/31/2018
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/15/2018
**LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/19/2019
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

Note:

*Testing was completed before equipment expiration date.

**Testing began after the calibration date.

7. OCCUPIED BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 10kHz. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

Note: Because the measured signal is CW or CW-like adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW

RESULTS

99% and 20dB BW

TYPE A (CE MODE)


Mode Kbps	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
848	13.56	21.5096	25.418

TYPE A (READER MODE)

Mode Kbps	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
848	13.56	21.7927	25.413


7.1. CE MODE

848Kbps

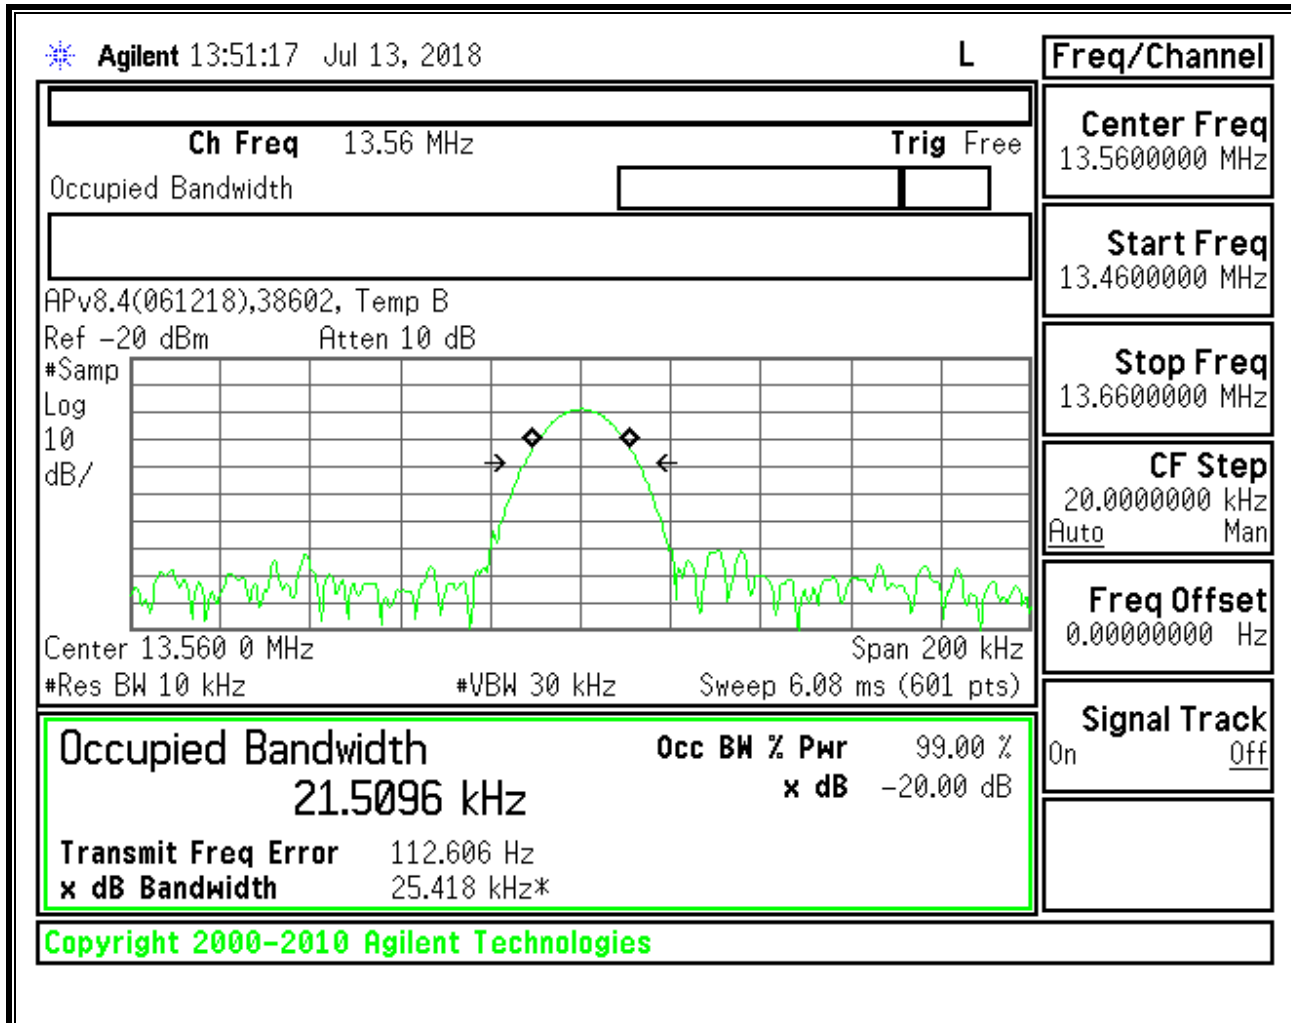

7.2. READER MODE

848Kbps

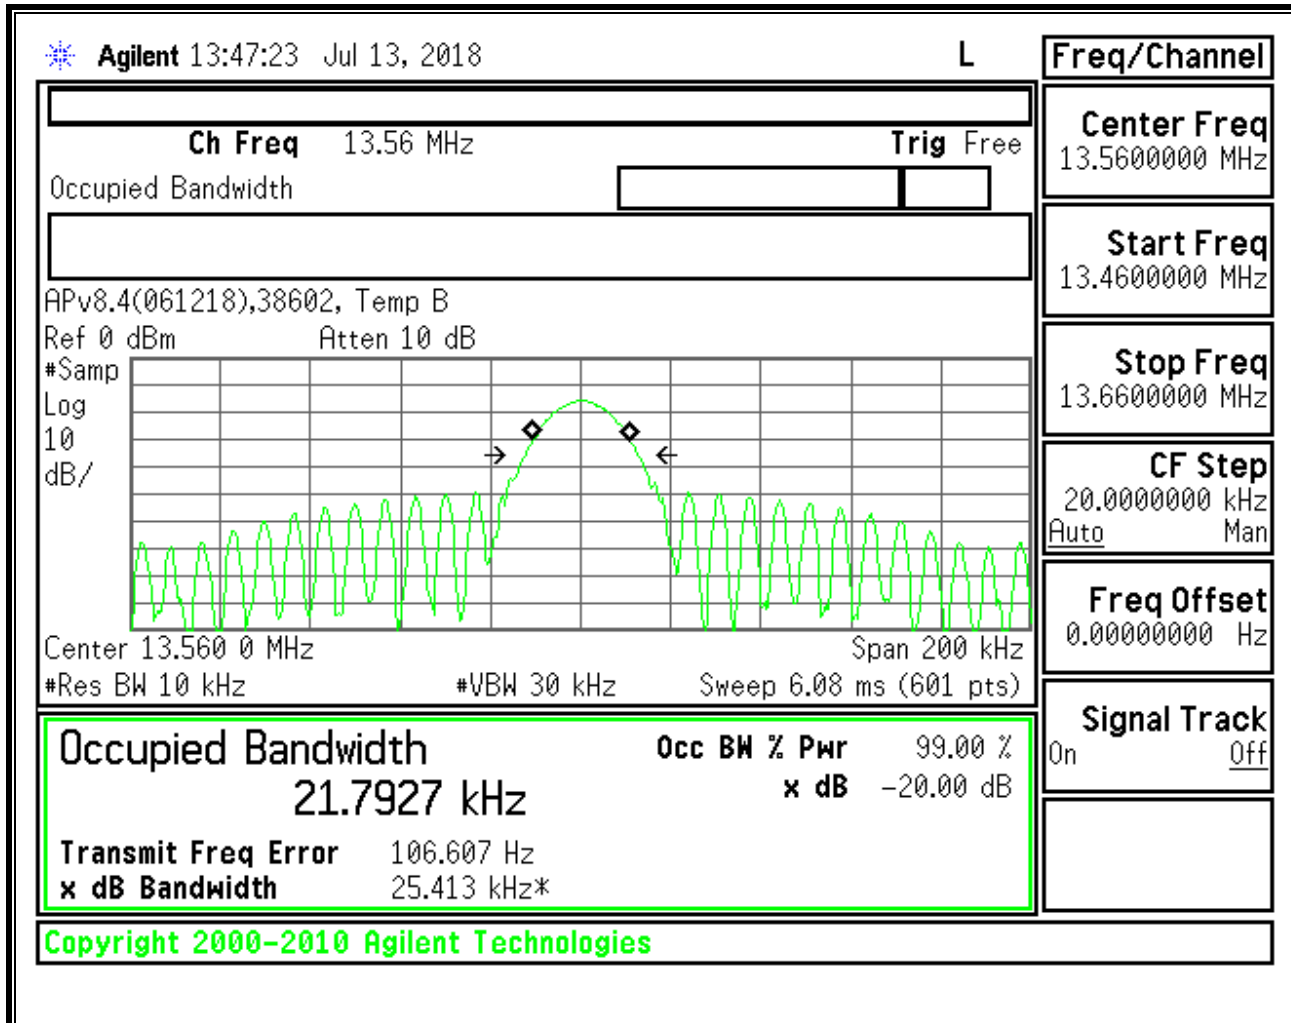

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225

IC RSS-210, Annex B.6

IC RSS-GEN, Section 8.9 (Transmitter)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the field strength from µV/m to dBµV/m is:

Limit (dBµV/m) = 20 log limit (µV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE

ANSI C63.10, 2013


The EUT is an intentional radiator that incorporates a digital device, the highest fundamental frequency generated or used in the device is 13.56 MHz; therefore, the frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater.

RESULTS

8.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 - 30 MHz), EUT WITH AC/DC ADAPTER

8.2.1. CE MODE

FUNDAMENTAL 848Kbps

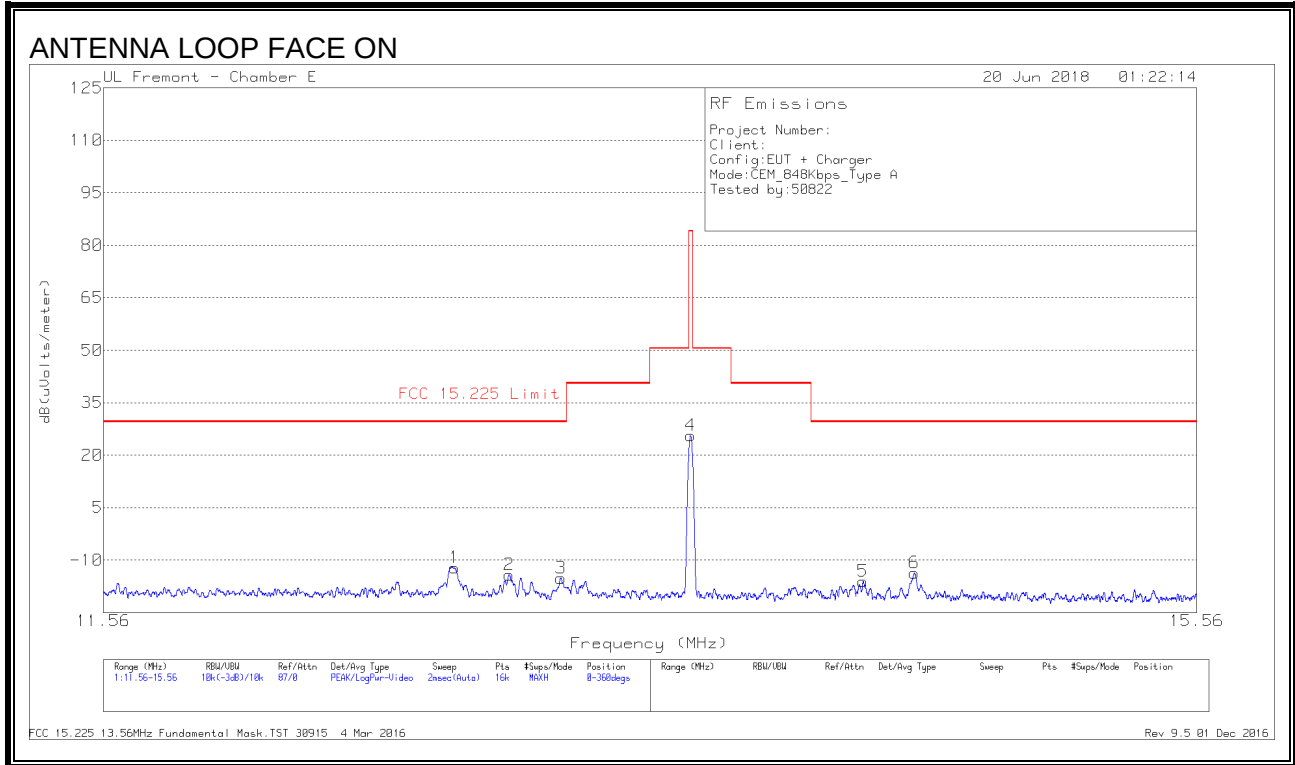




DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cables (dB)	Dist Corr (dB) 40Log	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	PK Margin (dB)	Azimuth (Degs)
7	12.71003	15.41	Pk	10.7	.5	-40	-13.39	29.54	-42.93	0-360
1	12.71813	16.52	Pk	10.7	.5	-40	-12.28	29.54	-41.82	0-360
8	12.90251	12.84	Pk	10.7	.5	-40	-15.96	29.54	-45.5	0-360
2	12.90763	14.57	Pk	10.7	.5	-40	-14.23	29.54	-43.77	0-360
3	13.0905	13.65	Pk	10.7	.5	-40	-15.15	29.54	-44.69	0-360
9	13.26259	12.25	Pk	10.7	.5	-40	-16.55	40.51	-57.06	0-360
10	13.55807	53.75	Pk	10.6	.5	-40	24.85	84	-59.15	0-360
4	13.56	54.53	Pk	10.6	.5	-40	25.63	84	-58.37	0-360
5	14.21188	12.77	Pk	10.6	.5	-40	-16.13	29.54	-45.67	0-360
11	14.2146	11.47	Pk	10.6	.5	-40	-17.43	29.54	-46.97	0-360
12	14.3922	12.29	Pk	10.6	.5	-40	-16.61	29.54	-46.15	0-360
6	14.41088	15.13	Pk	10.6	.5	-40	-13.77	29.54	-43.31	0-360

Pk - Peak detector

SPURIOUS EMISSION 848Kbps

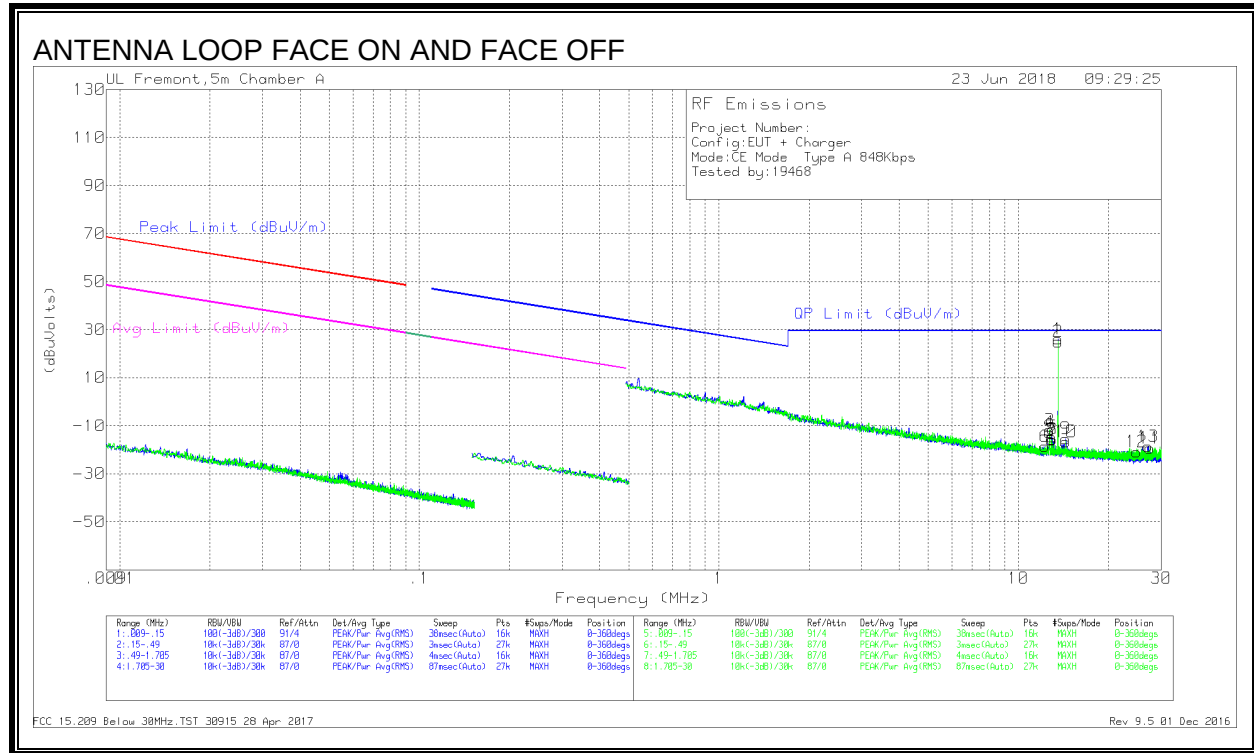

DATA



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dBm)	Cbl (dB)	Dist Corr 30m	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
6	12.2636	10.11	Pk	10.8	.5	-40	-18.59	29.5	-48.09	0-360
4	12.70586	15.86	Pk	10.8	.6	-40	-12.74	29.5	-42.24	0-360
3	12.72	16.77	Pk	10.8	.6	-40	-11.83	29.5	-41.33	0-360
7	12.9055	12.61	Pk	10.8	.6	-40	-15.99	29.5	-45.49	0-360
5	12.90655	14.07	Pk	10.8	.6	-40	-14.53	29.5	-44.03	0-360
8	12.98986	12.97	Pk	10.8	.6	-40	-15.63	29.5	-45.13	0-360
9	14.40309	13.45	Pk	10.7	.5	-40	-15.35	29.5	-44.85	0-360
10	14.40938	12.13	Pk	10.7	.5	-40	-16.67	29.5	-46.17	0-360
12	24.84903	9.04	Pk	9.4	.7	-40	-20.86	29.5	-50.36	0-360
13	27.11952	11.68	Pk	8.9	.8	-40	-18.62	29.5	-48.12	0-360
11	27.50047	11.1	Pk	8.8	.8	-40	-19.3	29.5	-48.8	0-360

Pk - Peak detector

Note: Marker 1 and 2 are the fundamental signal.

8.2.2. READER MODE

FUNDAMENTAL 848Kbps

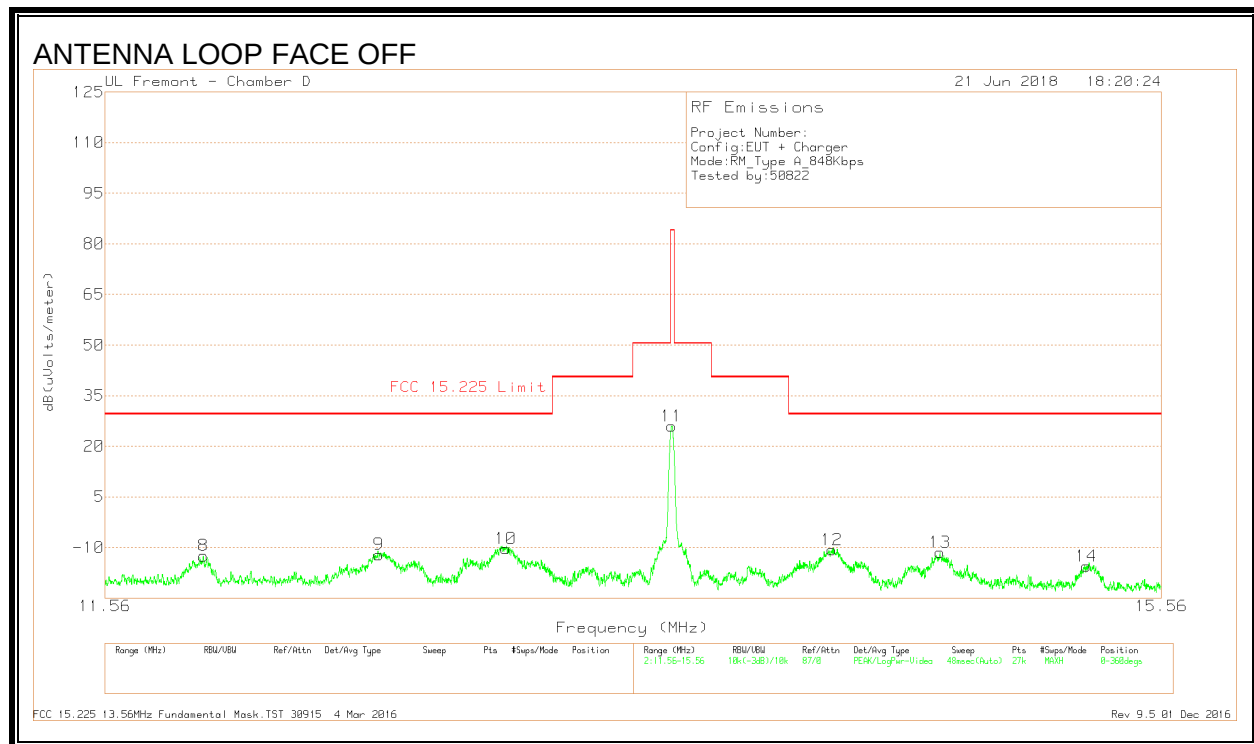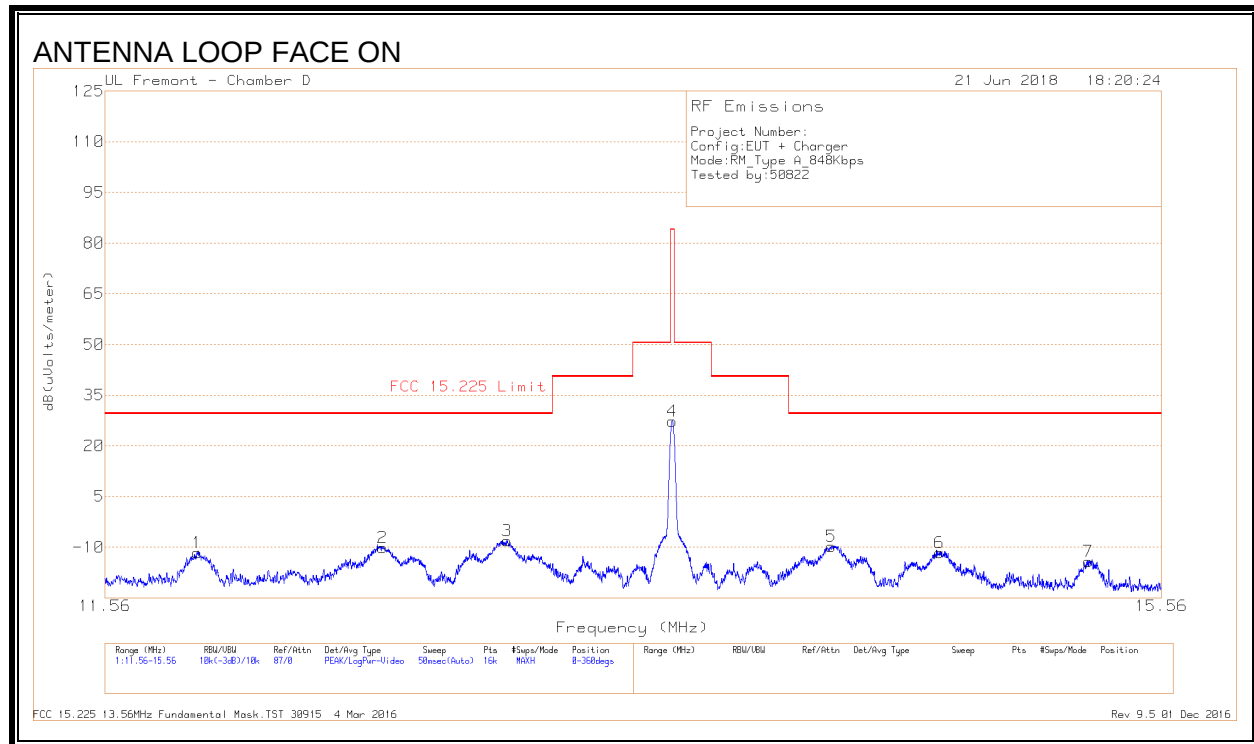


DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cables (dB)	Dist Corr 30m	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	PK Margin (dB)	Azimuth (Degs)
1	11.86313	17.07	Pk	10.8	.4	-40	-11.73	29.54	-41.27	0-360
8	11.88464	16.32	Pk	10.8	.4	-40	-12.48	29.54	-42.02	0-360
9	12.4853	16.69	Pk	10.8	.4	-40	-12.11	29.54	-41.65	0-360
2	12.49913	18.66	Pk	10.8	.4	-40	-10.14	29.54	-39.68	0-360
10	12.93973	18.64	Pk	10.7	.4	-40	-10.26	29.54	-39.8	0-360
3	12.94338	20.81	Pk	10.7	.4	-40	-8.09	29.54	-37.63	0-360
11	13.55837	55.05	Pk	10.6	.4	-40	26.05	84	-57.95	0-360
4	13.5615	56.24	Pk	10.6	.4	-40	27.24	84	-56.76	0-360
5	14.17963	19.16	Pk	10.6	.4	-40	-9.84	29.54	-39.38	0-360
12	14.18278	18.31	Pk	10.6	.4	-40	-10.69	29.54	-40.23	0-360
6	14.61713	17.52	Pk	10.5	.4	-40	-11.58	29.54	-41.12	0-360
13	14.62071	17.69	Pk	10.5	.4	-40	-11.41	29.54	-40.95	0-360
14	15.23625	13.62	Pk	10.5	.4	-40	-15.48	29.54	-45.02	0-360
7	15.24488	14.91	Pk	10.5	.4	-40	-14.19	29.54	-43.73	0-360

Pk - Peak detector

SPURIOUS EMISSION 848Kbps

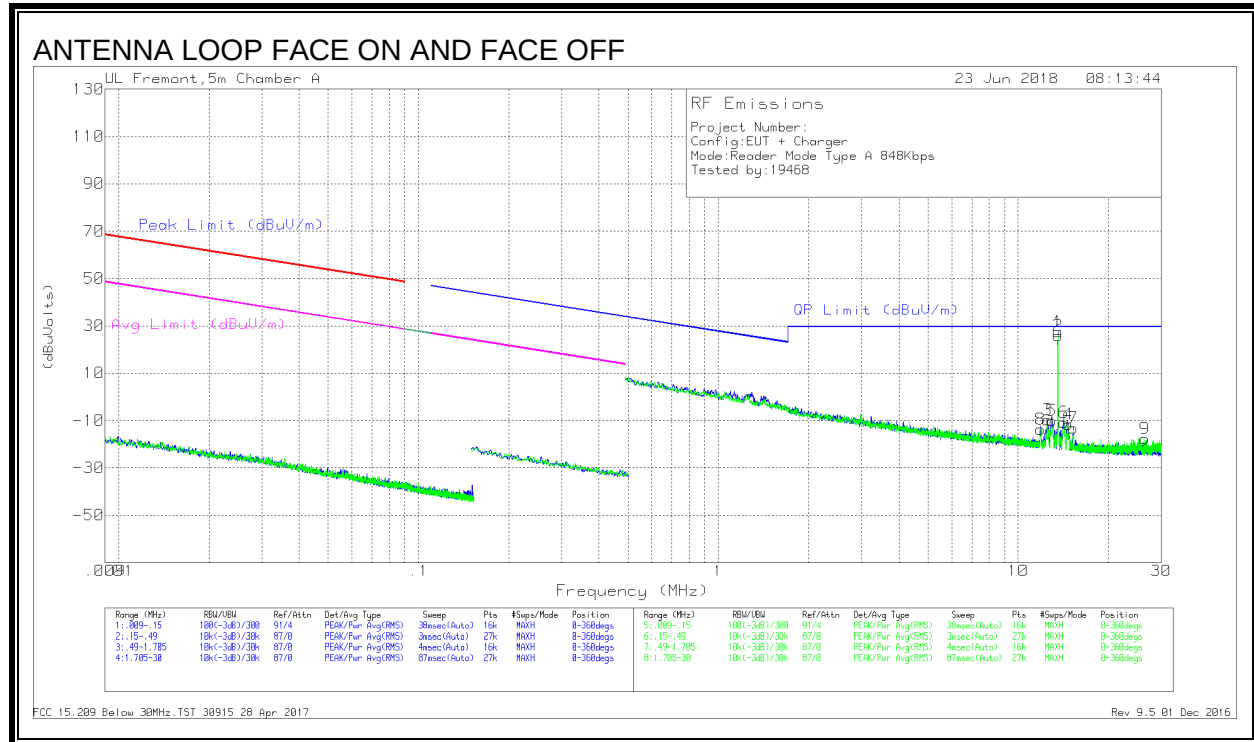

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dBm)	Cbl (dB)	Dist Corr 30m	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	11.87741	14.88	Pk	10.8	.5	-40	-13.82	29.5	-43.32	0-360
3	12.49835	18.88	Pk	10.8	.6	-40	-9.72	29.5	-39.22	0-360
5	12.93589	18.62	Pk	10.8	.6	-40	-9.98	29.5	-39.48	0-360
6	14.16782	18.03	Pk	10.7	.5	-40	-10.77	29.5	-40.27	0-360
4	14.64728	17.32	Pk	10.6	.6	-40	-11.48	29.5	-40.98	0-360
7	15.24935	15.53	Pk	10.6	.6	-40	-13.27	29.5	-42.77	0-360
9	26.39588	12.38	Pk	9.1	.8	-40	-17.72	29.5	-47.22	0-360


Pk - Peak detector


Note: Marker 1 and 2 are the fundamental signal.

8.3. TX SPURIOUS EMISSION 30 TO 1000 MHz, EUT WITH AC/DC ADAPTER

8.3.1. CE MODE

SPURIOUS EMISSION 848Kbps

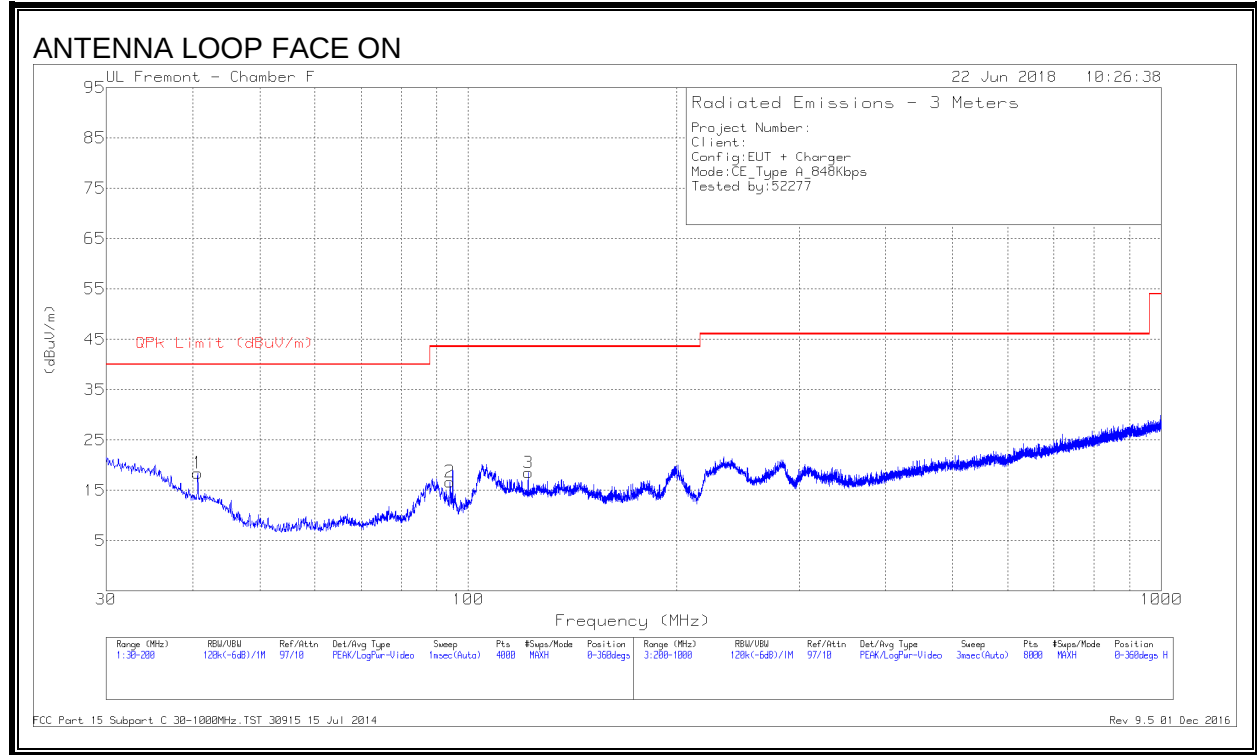

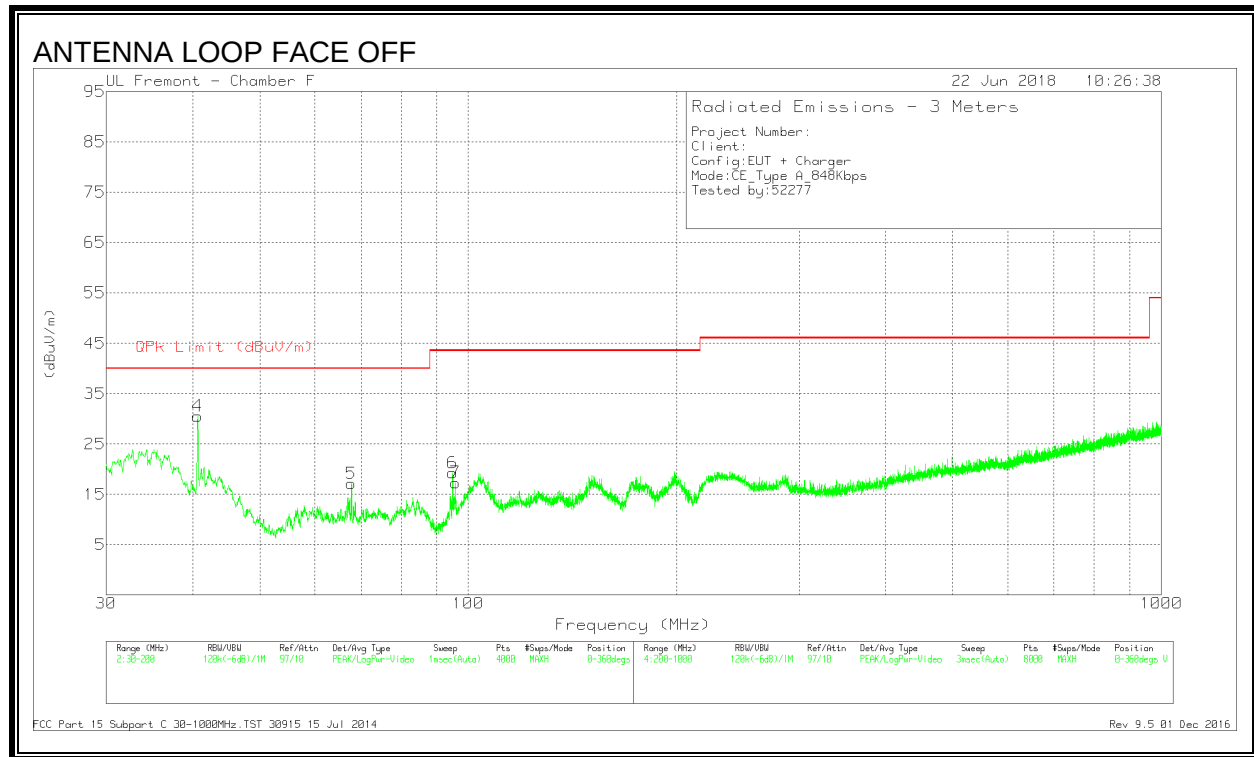

DATA



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T408 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	40.6703	32.84	Pk	17.4	-31.8	18.44	40	-21.56	0-360	399	H
2	94.0641	35.58	Pk	12.4	-31.3	16.68	43.52	-26.84	0-360	199	H
3	* 122.0363	31.9	Pk	17.7	-31.1	18.5	43.52	-25.02	0-360	199	H
4	40.6703	44.94	Pk	17.4	-31.8	30.54	40	-9.46	0-360	100	V
5	67.7923	36.75	Pk	11.9	-31.5	17.15	40	-22.85	0-360	100	V
6	94.9143	37.85	Pk	12.7	-31.3	19.25	43.52	-24.27	0-360	100	V
7	95.7645	35.74	Pk	12.9	-31.3	17.34	43.52	-26.18	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

8.3.2. READER MODE

SPURIOUS EMISSION 848Kbps

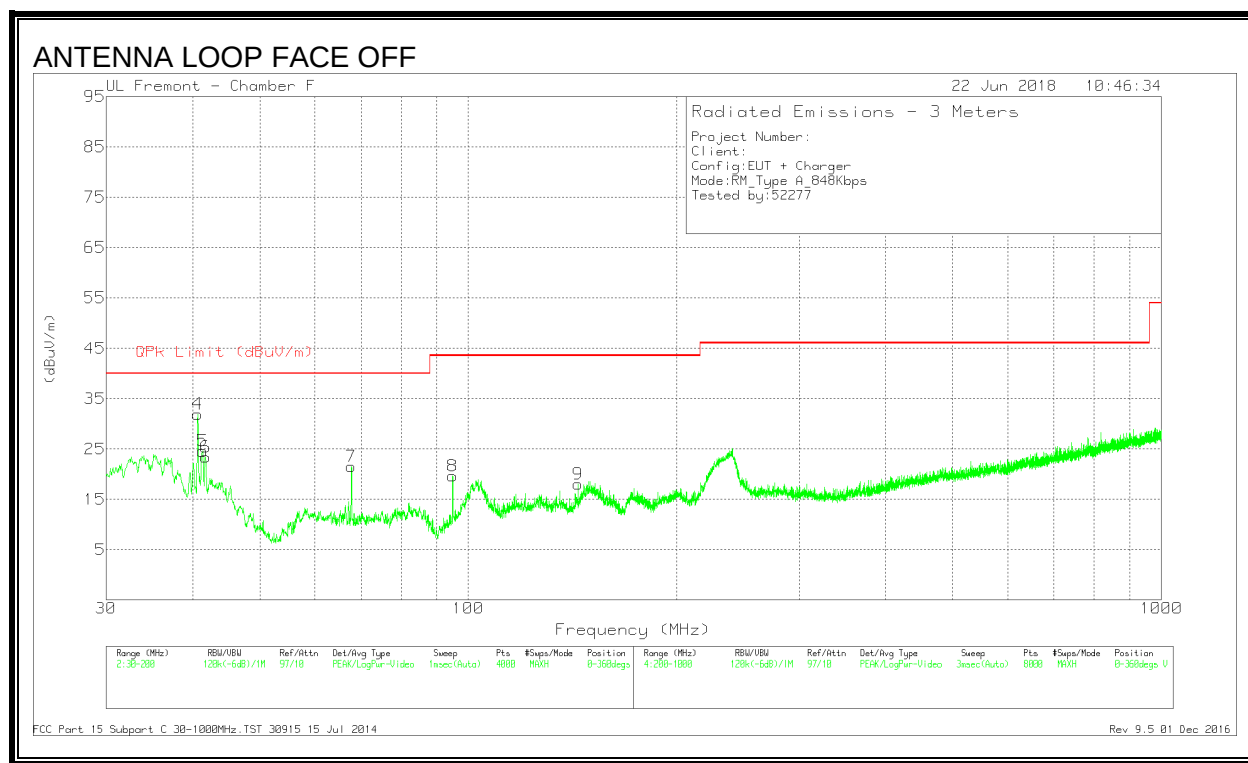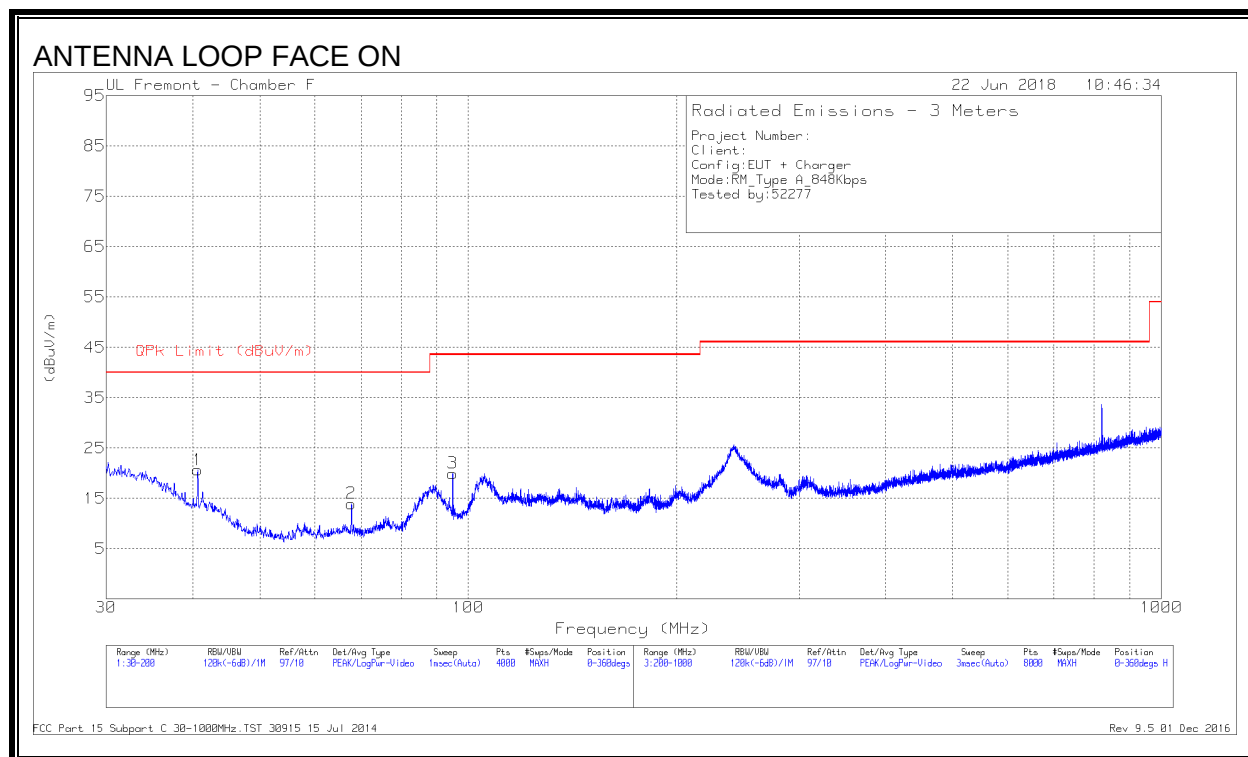

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T408 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	40.6703	35.06	Pk	17.4	-31.8	20.66	40	-19.34	0-360	399	H
2	67.7923	33.57	Pk	11.9	-31.5	13.97	40	-26.03	0-360	199	H
3	94.9143	38.57	Pk	12.7	-31.3	19.97	43.52	-23.55	0-360	299	H
4	40.6703	46.34	Pk	17.4	-31.8	31.94	40	-8.06	0-360	100	V
5	41.3504	39.5	Pk	16.9	-31.8	24.6	40	-15.4	0-360	100	V
6	41.7755	38.58	Pk	16.6	-31.8	23.38	40	-16.62	0-360	100	V
7	67.7923	41.11	Pk	11.9	-31.5	21.51	40	-18.49	0-360	100	V
8	94.9143	38.25	Pk	12.7	-31.3	19.65	43.52	-23.87	0-360	100	V
9	143.972	32.21	Pk	16.7	-30.9	18.01	43.52	-25.51	0-360	100	V

Pk - Peak detector

9. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

IC RSS-210, Annex B.6

Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).

TEST PROCEDURE

ANSI C63.10-2013 Clause 6.8

RESULTS

No non-compliance noted.

ID:	38602	Date:	7/12/18
------------	-------	--------------	---------

9.1. CE MODE

Type A 848Kbps

Reference Frequency: EUT Channel 13.56 MHz @ 20°C										
Limit: ± 100 ppm = 1.35600 KHz										
Power Supply	Envir. Temp	Frequency Deviation Measured with Time Elapse								
(VAC)	(°C)	Startup (MHz)	Delta (ppm)	@ 2 mins (MHz)	Delta (ppm)	@ 5 mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.5600589	-0.560	13.5600614	-0.745	13.5600645	-0.973	13.5600687	-1.283	± 100
	40	13.5600469	0.324	13.5600471	0.310	13.5600474	0.288	13.5600481	0.236	± 100
	30	13.5600573	-0.442	13.5600555	-0.310	13.5600537	-0.177	13.5600922	-3.016	± 100
	20	13.5600513	0.000	13.5600518	-0.037	13.5600526	-0.096	13.5600529	-0.118	± 100
	10	13.5600990	-3.518	13.5600968	-3.355	13.5600946	-3.193	13.5600922	-3.016	± 100
	0	13.5601229	-5.280	13.5601212	-5.155	13.5601192	-5.007	13.5601174	-4.875	± 100
	-10	13.5601387	-6.445	13.5601380	-6.394	13.5601372	-6.335	13.5601364	-6.276	± 100
	-20	13.5601359	-6.239	13.5601390	-6.468	13.5601418	-6.674	13.5601441	-6.844	± 100
3.23	20	13.5600943	-3.171	13.5600948	-3.208	13.5600956	-3.267	13.5600965	-3.333	± 100
4.37	20	13.5600968	-3.355	13.5600969	-3.363	13.5600971	-3.378	13.5600973	-3.392	± 100

9.2. READER MODE

Type A 848Kbps

Reference Frequency: EUT Channel 13.56 MHz @ 20°C										
Limit: ± 100 ppm = 1.35600 KHz										
Power Supply	Envir. Temp	Frequency Deviation Measured with Time Elapse								
(VAC)	(°C)	Startup (MHz)	Delta (ppm)	@ 2 mins (MHz)	Delta (ppm)	@ 5 mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.5600504	0.286	13.5600529	0.107	13.5600571	-0.203	13.5600640	-0.716	± 100
	40	13.5600607	-0.473	13.5600594	-0.375	13.5600582	-0.286	13.5600576	-0.241	± 100
	30	13.5600510	0.245	13.5600497	0.343	13.5600486	0.425	13.5600477	0.486	± 100
	20	13.5600543	0.000	13.5600545	-0.013	13.5600548	-0.036	13.5600551	-0.056	± 100
	10	13.5600609	-0.487	13.5600633	-0.661	13.5600660	-0.864	13.5600693	-1.105	± 100
	0	13.5600796	-1.862	13.5600830	-2.111	13.5600869	-2.400	13.5600914	-2.732	± 100
	-10	13.5601042	-3.680	13.5601078	-3.943	13.5601118	-4.235	13.5601161	-4.554	± 100
	-20	13.5601287	-5.484	13.5601312	-5.671	13.5601338	-5.859	13.5601362	-6.039	± 100
3.23	20	13.5600975	-3.184	13.5600985	-3.257	13.5601000	-3.368	13.5601021	-3.523	± 100
4.37	20	13.5600946	-2.970	13.5600944	-2.955	13.5600943	-2.948	13.5600943	-2.948	± 100

10. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

IC RSS-GEN, Section 8.8

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Notes: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

TEST PROCEDURE

ANSI C63.10:2013


RESULTS

No non-compliance noted:

10.1. CE MODE

10.1.1. NORMAL OPERATION, 848Kbps

LINE 1 RESULTS

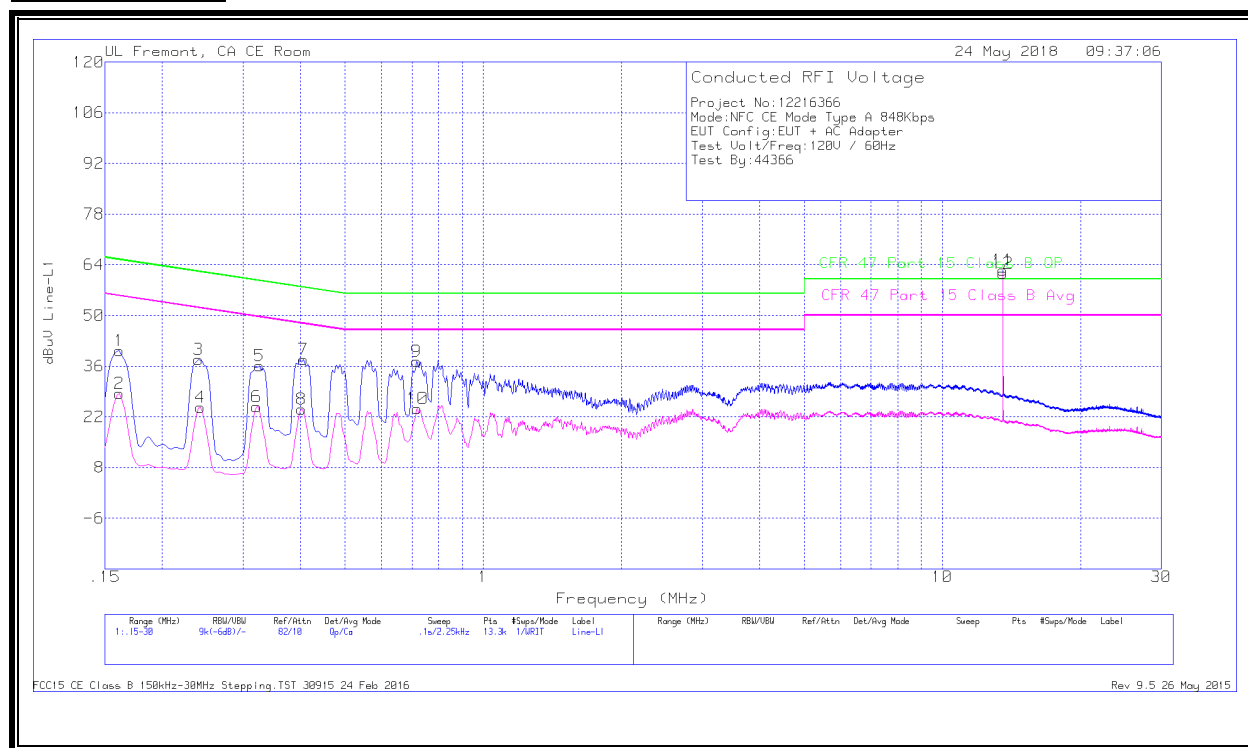


WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.16125	30	Qp	.1	0	10.1	40.2	65.4	-25.2	-	-
2	.16125	18.31	Ca	.1	0	10.1	28.51	-	-	55.4	-26.89
3	.24	27.74	Qp	0	0	10.1	37.84	62.1	-24.26	-	-
4	.24225	14.56	Ca	0	0	10.1	24.66	-	-	52.02	-27.36
5	.3255	26.01	Qp	0	0	10.1	36.11	59.57	-23.46	-	-
6	.321	14.67	Ca	0	0	10.1	24.77	-	-	49.68	-24.91
7	.4065	27.78	Qp	0	0	10.1	37.88	57.72	-19.84	-	-
8	.402	14.04	Ca	0	0	10.1	24.14	-	-	47.81	-23.67
9	.717	27.2	Qp	0	0	10.1	37.3	56	-18.7	-	-
10	.71925	14.18	Ca	0	0	10.1	24.28	-	-	46	-21.72
11	13.56	52.04	Qp	.1	.2	10.2	62.54	60	2.54	-	-
12	13.56	51.17	Ca	.1	.2	10.2	61.67	-	-	50	11.67

Qp - Quasi-Peak detector
Ca - CISPR average detection

Note: 13.56MHz is the fundamental frequency of the EUT. Data documented in section below indicates that when the antenna terminal is terminated the fundamental amplitude is lowered below the limit line.

LINE 2 RESULTS

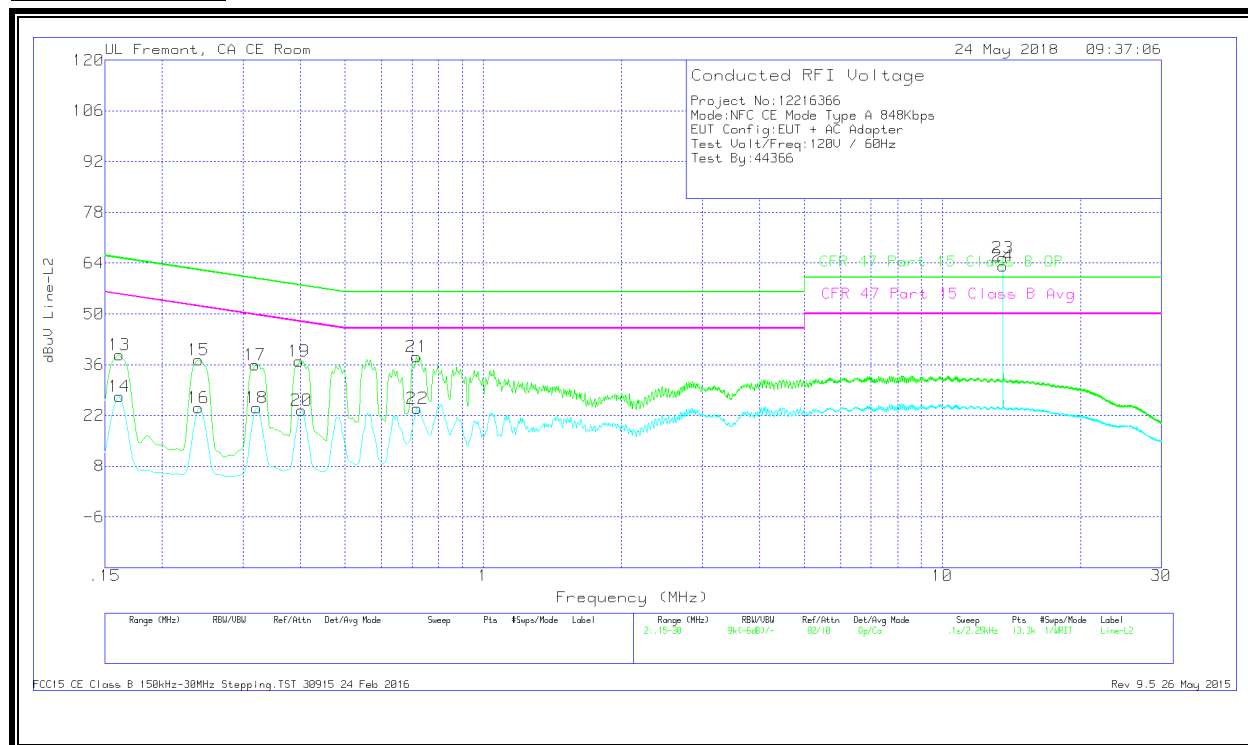

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.16125	28.65	Qp	0	0	10.1	38.75	65.4	-26.65	-	-
14	.16125	17.2	Ca	0	0	10.1	27.3	-	-	55.4	-28.1
15	.24	27.19	Qp	0	0	10.1	37.29	62.1	-24.81	-	-
16	.24	13.95	Ca	0	0	10.1	24.05	-	-	52.1	-28.05
17	.31875	25.78	Qp	0	0	10.1	35.88	59.74	-23.86	-	-
18	.321	14.04	Ca	0	0	10.1	24.14	-	-	49.68	-25.54
19	.3975	26.83	Qp	0	0	10.1	36.93	57.91	-20.98	-	-
20	.402	13.26	Ca	0	0	10.1	23.36	-	-	47.81	-24.45
21	.717	28.03	Qp	0	0	10.1	38.13	56	-17.87	-	-
22	.71925	13.89	Ca	0	0	10.1	23.99	-	-	46	-22.01
23	13.56	55	Qp	.1	.2	10.2	65.5	60	5.5	-	-
24	13.56	52.74	Ca	.1	.2	10.2	63.24	-	-	50	13.24


Qp - Quasi-Peak detector

Ca - CISPR average detection

Note: 13.56MHz is the fundamental frequency of the EUT. Data documented in section below indicates that when the antenna terminal is terminated the fundamental amplitude is lowered below the limit line.

10.1.2. NORMAL OPERATION WITH ANTENNA PORT TERMINATED, 848Kbps

LINE 1 RESULTS

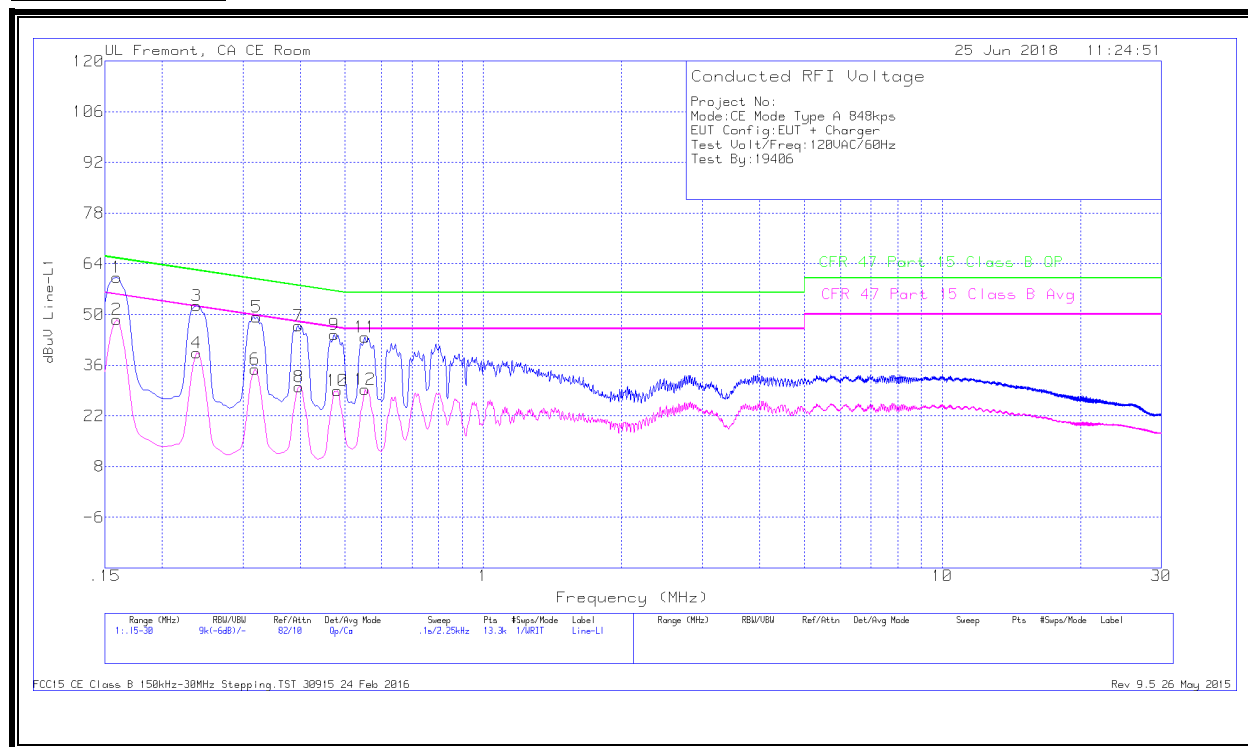


WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.159	49.43	Qp	.7	0	10.1	60.23	65.52	-5.29	-	-
2	.159	37.73	Ca	.7	0	10.1	48.53	-	-	55.52	-6.99
3	.23775	41.92	Qp	.4	0	10.1	52.42	62.17	-9.75	-	-
4	.23775	28.82	Ca	.4	0	10.1	39.32	-	-	52.17	-12.85
5	.321	38.87	Qp	.4	0	10.1	49.37	59.68	-10.31	-	-
6	.31875	24.35	Ca	.4	0	10.1	34.85	-	-	49.74	-14.89
7	.39525	36.6	Qp	.2	0	10.1	46.9	57.95	-11.05	-	-
8	.3975	19.78	Ca	.2	0	10.1	30.08	-	-	47.91	-17.83
9	.474	34.21	Qp	.1	0	10.1	44.41	56.44	-12.03	-	-
10	.48075	18.69	Ca	.1	0	10.1	28.89	-	-	46.33	-17.44
11	.55275	33.56	Qp	.1	0	10.1	43.76	56	-12.24	-	-
12	.55275	19.09	Ca	.1	0	10.1	29.29	-	-	46	-16.71

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

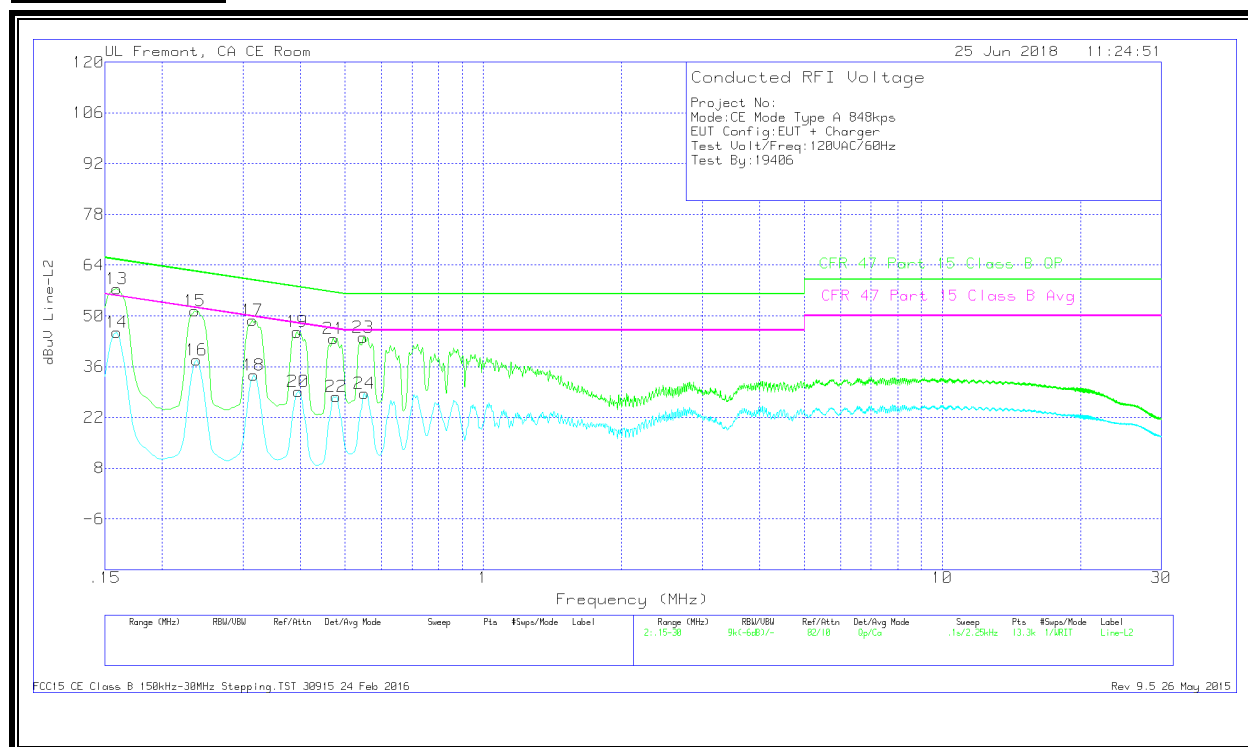

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.159	47.22	Qp	.1	0	10.1	57.42	65.52	-8.1	-	-
14	.159	35.29	Ca	.1	0	10.1	45.49	-	-	55.52	-10.03
15	.2355	41.21	Qp	.1	0	10.1	51.41	62.25	-10.84	-	-
16	.23775	27.7	Ca	.1	0	10.1	37.9	-	-	52.17	-14.27
17	.31425	38.51	Qp	.1	0	10.1	48.71	59.86	-11.15	-	-
18	.3165	23.45	Ca	.1	0	10.1	33.65	-	-	49.8	-16.15
19	.393	35.37	Qp	.1	0	10.1	45.57	58	-12.43	-	-
20	.39525	18.98	Ca	.1	0	10.1	29.18	-	-	47.95	-18.77
21	.47175	33.51	Qp	.1	0	10.1	43.71	56.48	-12.77	-	-
22	.4785	17.49	Ca	.1	0	10.1	27.69	-	-	46.37	-18.68
23	.54825	33.95	Qp	.1	0	10.1	44.15	56	-11.85	-	-
24	.5505	18.44	Ca	.1	0	10.1	28.64	-	-	46	-17.36


Qp - Quasi-Peak detector

Ca - CISPR average detection

10.2. READER MODE

10.2.1. NORMAL OPERATION, 848Kbps

LINE 1 RESULTS

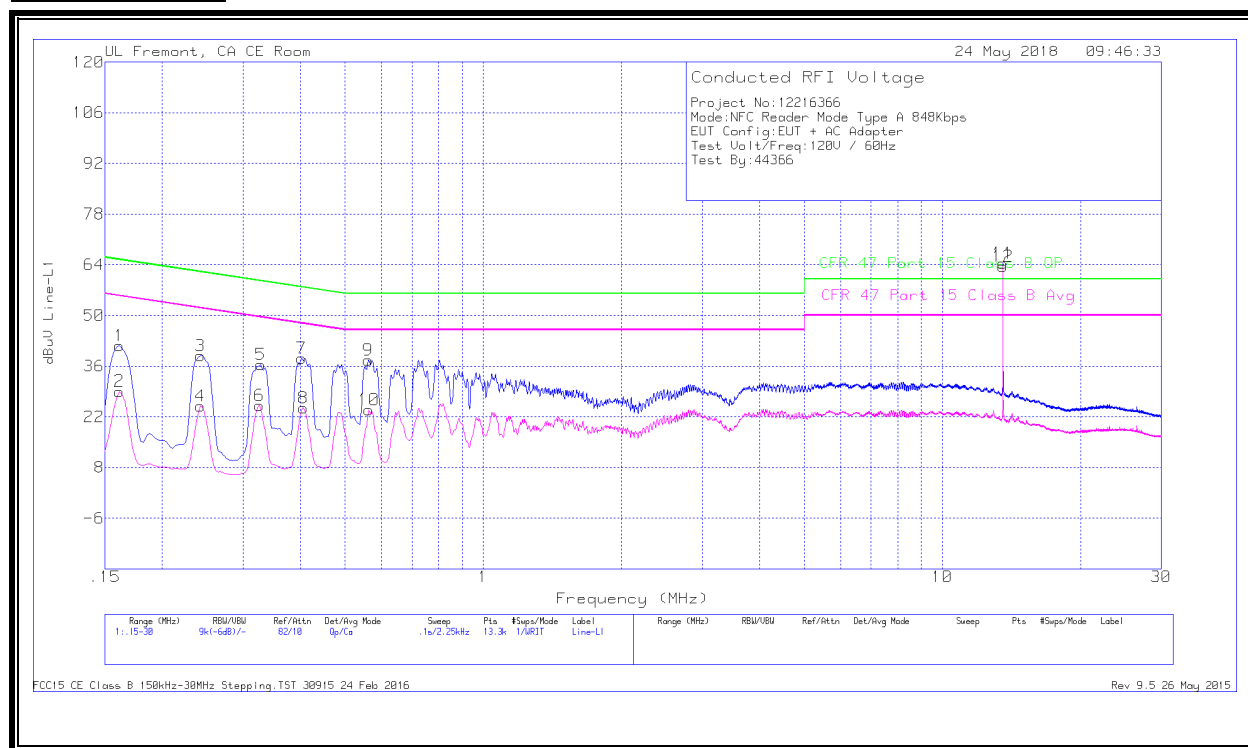

WORST EMISSIONS


Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.16125	31.49	Qp	.1	0	10.1	41.69	65.4	-23.71	-	-
2	.16125	18.85	Ca	.1	0	10.1	29.05	-	-	55.4	-26.35
3	.24225	28.83	Qp	0	0	10.1	38.93	62.02	-23.09	-	-
4	.24225	14.82	Ca	0	0	10.1	24.92	-	-	52.02	-27.1
5	.32775	26.29	Qp	0	0	10.1	36.39	59.51	-23.12	-	-
6	.3255	15.06	Ca	0	0	10.1	25.16	-	-	49.57	-24.41
7	.402	28.1	Qp	0	0	10.1	38.2	57.81	-19.61	-	-
8	.4065	14.33	Ca	0	0	10.1	24.43	-	-	47.72	-23.29
9	.56175	27.6	Qp	0	0	10.1	37.7	56	-18.3	-	-
10	.564	13.78	Ca	0	0	10.1	23.88	-	-	46	-22.12
11	13.56	53.9	Qp	.1	.2	10.2	64.4	60	4.4	-	-
12	13.56	53.08	Ca	.1	.2	10.2	63.58	-	-	50	13.58

Qp - Quasi-Peak detector

Ca - CISPR average detection

Note: 13.56MHz is the fundamental frequency of the EUT. Data documented in section below indicates that when the antenna terminal is terminated the fundamental amplitude is lowered below the limit line.

LINE 2 RESULTS

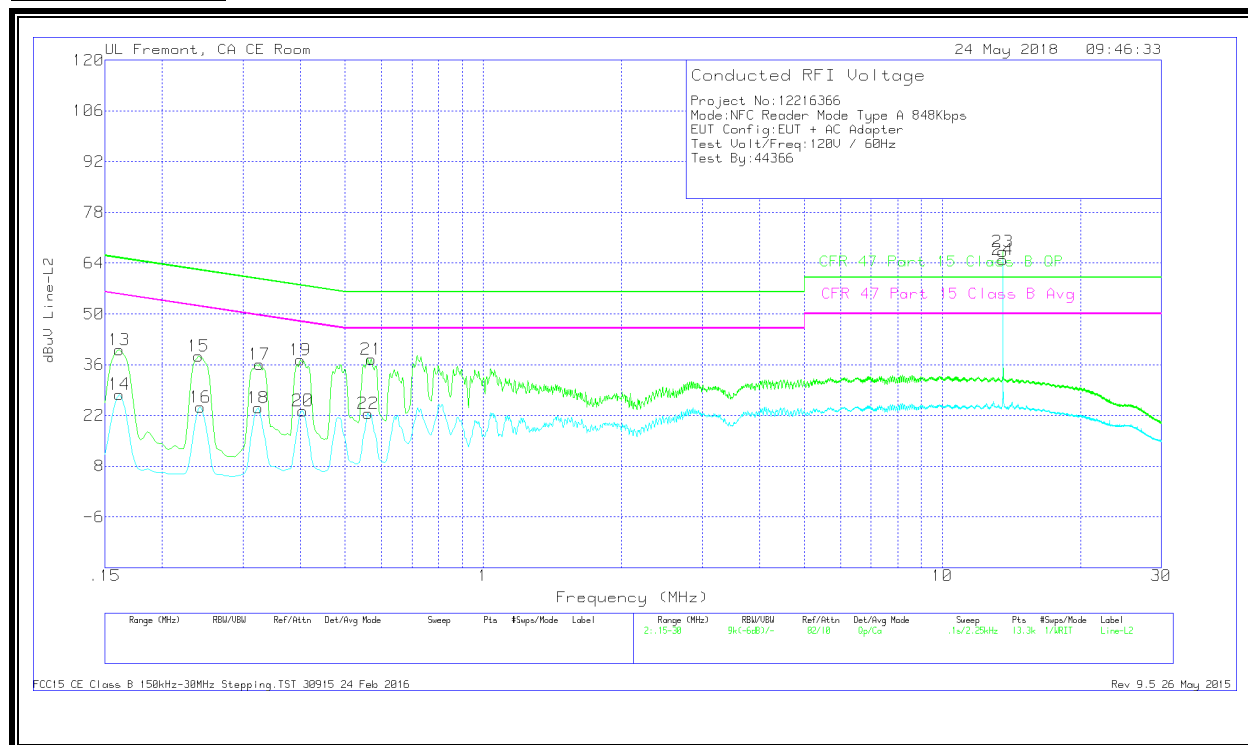

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.16125	30	Qp	0	0	10.1	40.1	65.4	-25.3	-	-
14	.16125	17.73	Ca	0	0	10.1	27.83	-	-	55.4	-27.57
15	.24	28.2	Qp	0	0	10.1	38.3	62.1	-23.8	-	-
16	.24225	14.23	Ca	0	0	10.1	24.33	-	-	52.02	-27.69
17	.3255	25.96	Qp	0	0	10.1	36.06	59.57	-23.51	-	-
18	.32325	13.98	Ca	0	0	10.1	24.08	-	-	49.62	-25.54
19	.39975	27.16	Qp	0	0	10.1	37.26	57.86	-20.6	-	-
20	.40425	13.21	Ca	0	0	10.1	23.31	-	-	47.77	-24.46
21	.57075	27.41	Qp	0	0	10.1	37.51	56	-18.49	-	-
22	.56175	12.42	Ca	0	0	10.1	22.52	-	-	46	-23.48
23	13.56	56.63	Qp	.1	.2	10.2	67.13	60	7.13	-	-
24	13.56	54.39	Ca	.1	.2	10.2	64.89	-	-	50	14.89


Qp - Quasi-Peak detector

Ca - CISPR average detection

Note: 13.56MHz is the fundamental frequency of the EUT. Data documented in section below indicates that when the antenna terminal is terminated the fundamental amplitude is lowered below the limit line.

10.2.2. NORMAL OPERATION WITH ANTENNA PORT TERMINATED, 848Kbps

LINE 1 RESULTS

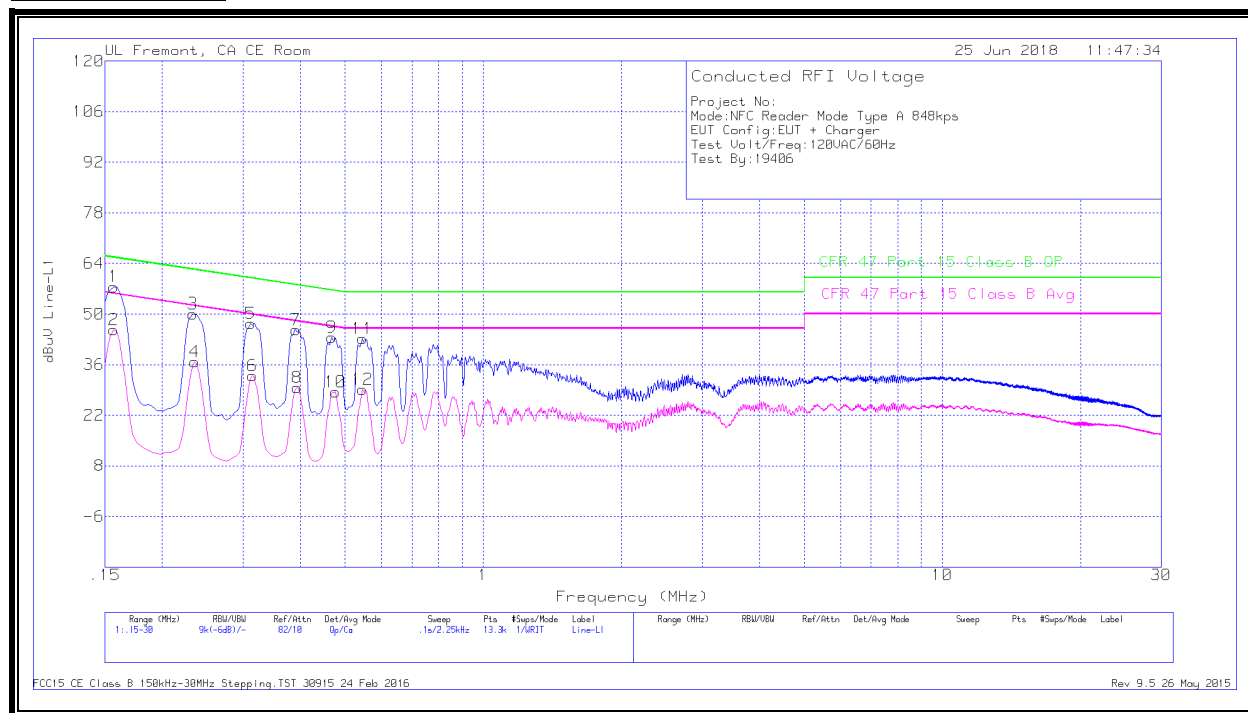


WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.15675	46.76	Qp	.7	0	10.1	57.56	65.63	-8.07	-	-
2	.15675	34.87	Ca	.7	0	10.1	45.67	-	-	55.63	-9.96
3	.23325	39.48	Qp	.5	0	10.1	50.08	62.33	-12.25	-	-
4	.2355	26.16	Ca	.5	0	10.1	36.76	-	-	52.25	-15.49
5	.312	36.94	Qp	.4	0	10.1	47.44	59.92	-12.48	-	-
6	.31425	22.5	Ca	.4	0	10.1	33	-	-	49.86	-16.86
7	.39075	35.38	Qp	.2	0	10.1	45.68	58.05	-12.37	-	-
8	.393	19.36	Ca	.2	0	10.1	29.66	-	-	48	-18.34
9	.46725	33.36	Qp	.1	0	10.1	43.56	56.56	-13	-	-
10	.47625	18.17	Ca	.1	0	10.1	28.37	-	-	46.4	-18.03
11	.546	32.94	Qp	.1	0	10.1	43.14	56	-12.86	-	-
12	.546	18.93	Ca	.1	0	10.1	29.13	-	-	46	-16.87

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

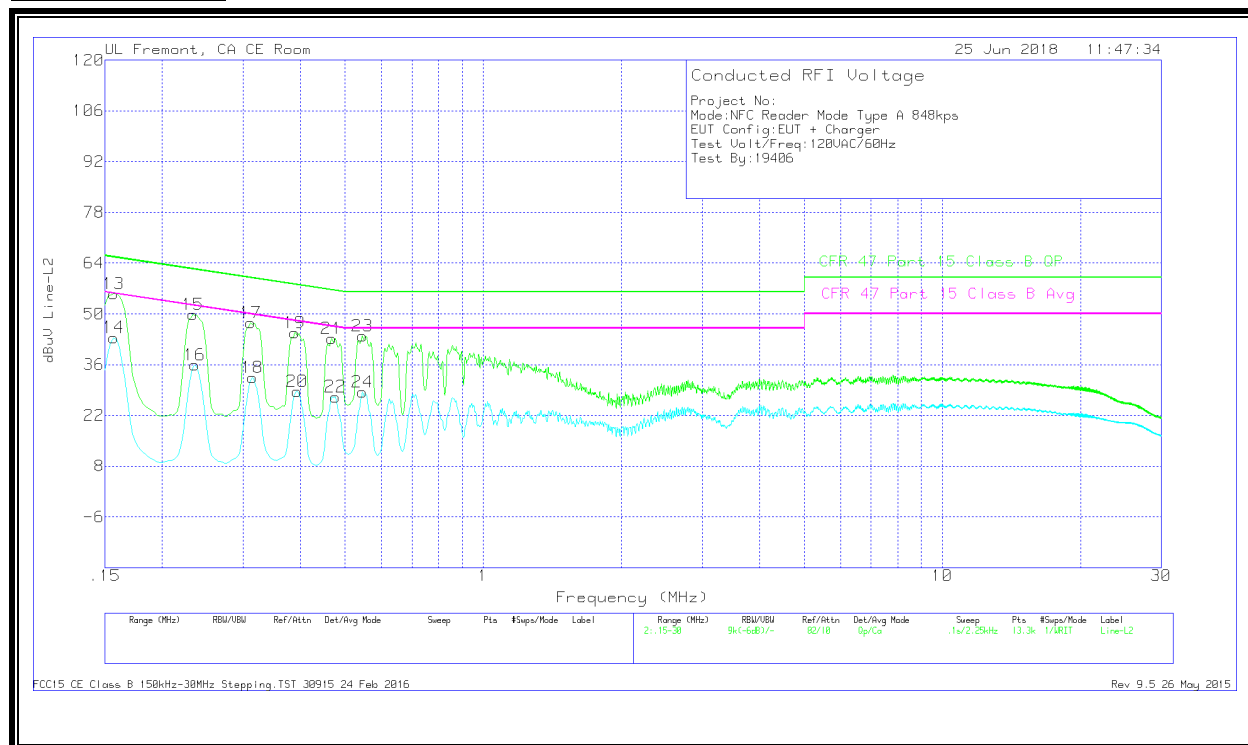

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.15675	45.42	Qp	.1	0	10.1	55.62	65.63	-10.01	-	-
14	.15675	33.28	Ca	.1	0	10.1	43.48	-	-	55.63	-12.15
15	.23325	39.64	Qp	.1	0	10.1	49.84	62.33	-12.49	-	-
16	.2355	25.76	Ca	.1	0	10.1	35.96	-	-	52.25	-16.29
17	.312	37.4	Qp	.1	0	10.1	47.6	59.92	-12.32	-	-
18	.31425	22.17	Ca	.1	0	10.1	32.37	-	-	49.86	-17.49
19	.3885	34.55	Qp	.1	0	10.1	44.75	58.1	-13.35	-	-
20	.393	18.41	Ca	.1	0	10.1	28.61	-	-	48	-19.39
21	.46725	33.07	Qp	.1	0	10.1	43.27	56.56	-13.29	-	-
22	.47625	16.94	Ca	.1	0	10.1	27.14	-	-	46.4	-19.26
23	.546	33.66	Qp	.1	0	10.1	43.86	56	-12.14	-	-
24	.546	18.21	Ca	.1	0	10.1	28.41	-	-	46	-17.59

Qp - Quasi-Peak detector

Ca - CISPR average detection

END OF REPORT

11. SETUP PHOTOS

Please refer to 12216366-EP1V1 for setup photos