


Antenna 3

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

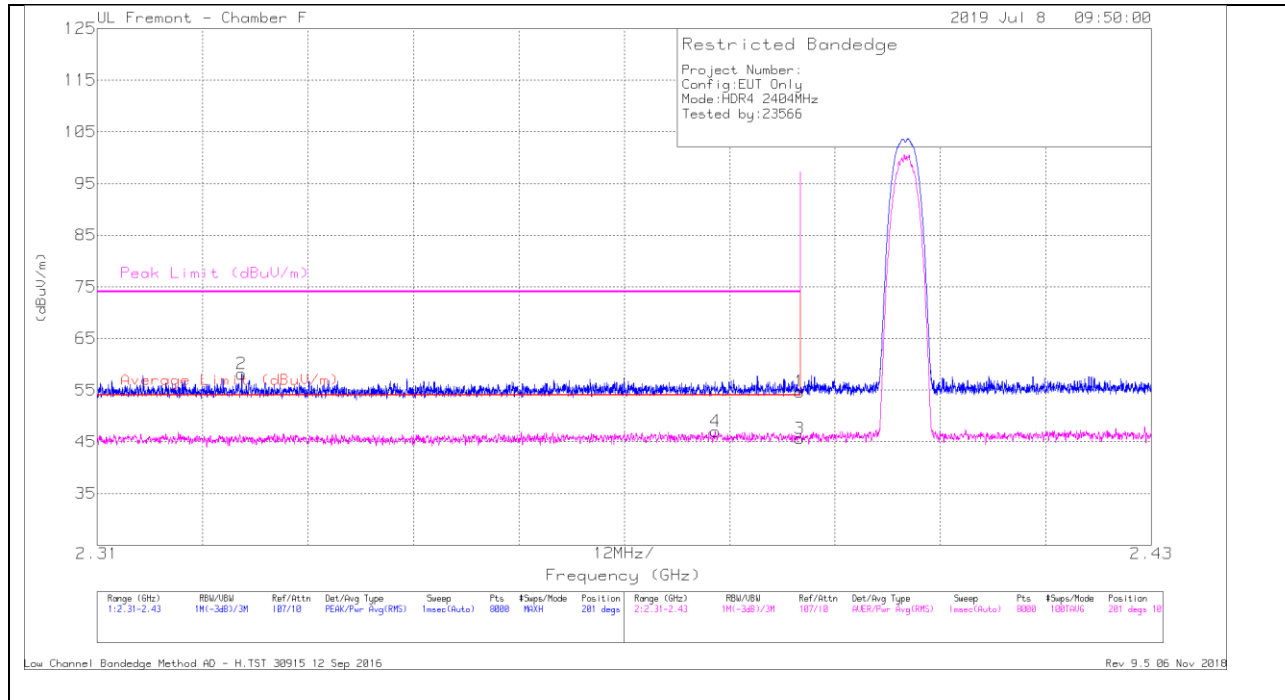

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.22	Pk	32	-14.5	54.72	-	-	74	-19.28	201	107	H
2	* 2.326	40.95	Pk	31.7	-14.5	58.15	-	-	74	-15.85	201	107	H
3	* 2.39	28.13	RMS	32	-14.5	45.63	54	-8.37	-	-	201	107	H
4	* 2.38	29.61	RMS	31.9	-14.5	47.01	54	-6.99	-	-	201	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

Low Channel Bandedge Method AD - H.TST 30915 12 Sep 2016

Rev 9.5 06 Nov 2018

VERTICAL RESULT

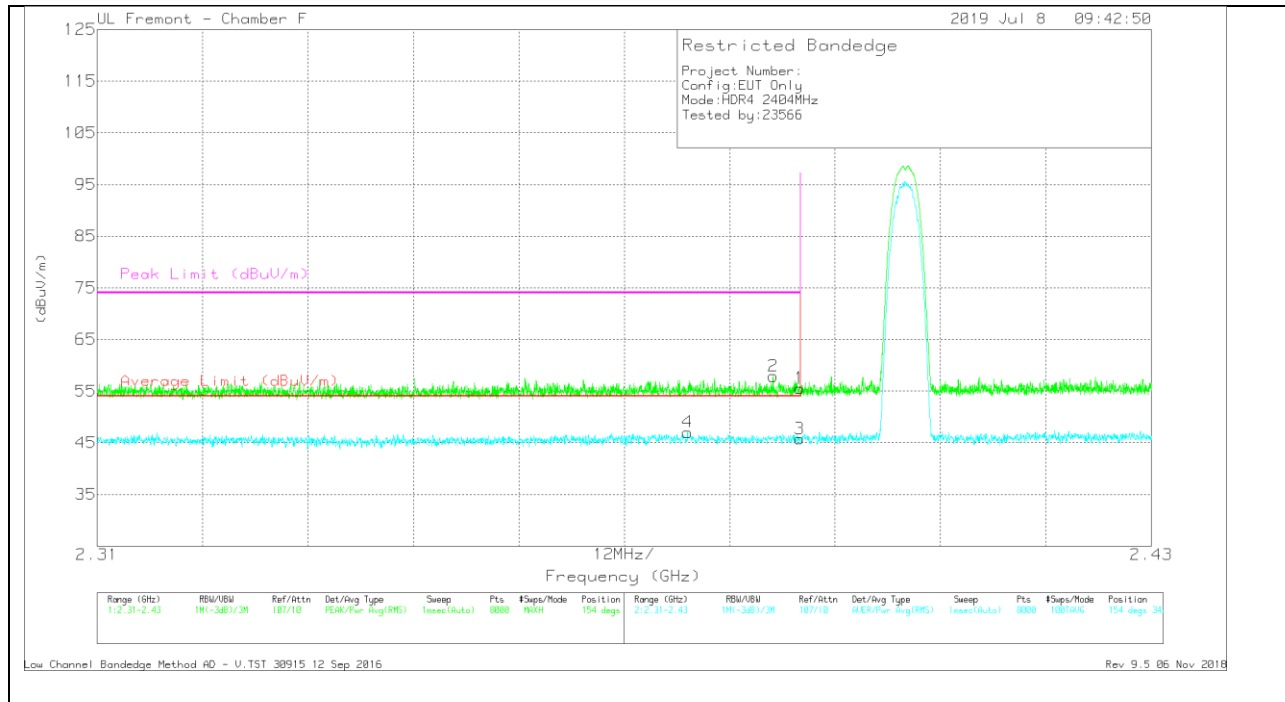

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.02	Pk	32	-14.5	55.52	-	-	74	-18.48	154	342	V
2	* 2.387	40.51	Pk	31.9	-14.5	57.91	-	-	74	-16.09	154	342	V
3	* 2.39	28.26	RMS	32	-14.5	45.76	54	-8.24	-	-	154	342	V
4	* 2.377	29.54	RMS	31.9	-14.4	47.04	54	-6.96	-	-	154	342	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

Low Channel Bandedge Method AD - V.TST 30915 12 Sep 2016

Rev 9.5 06 Nov 2018

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

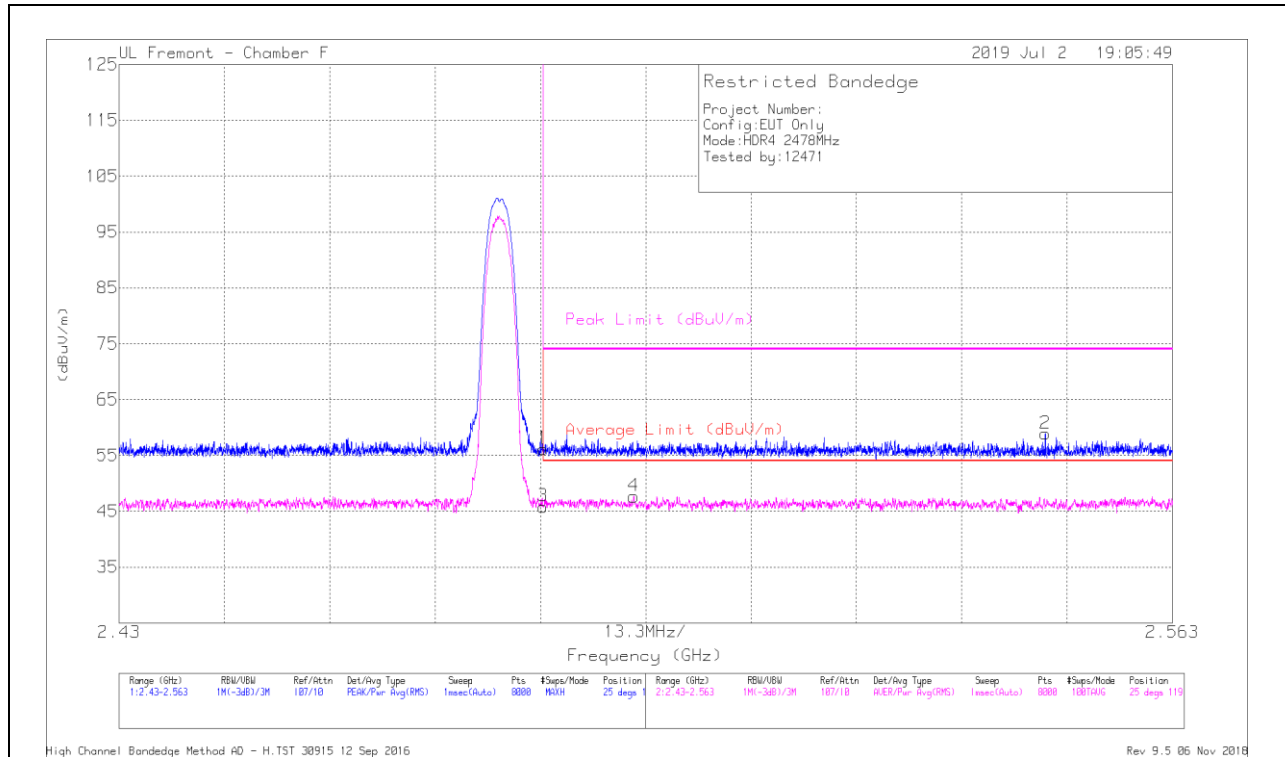

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.43	Pk	32.4	-14.7	56.13	-	-	74	-17.87	25	119	H
2	2.547	41.3	Pk	32.3	-14.7	58.9	-	-	74	-15.1	25	119	H
3	* 2.484	28.13	RMS	32.4	-14.7	45.83	54	-8.17	-	-	25	119	H
4	* 2.495	30.08	RMS	32.4	-14.8	47.68	54	-6.32	-	-	25	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

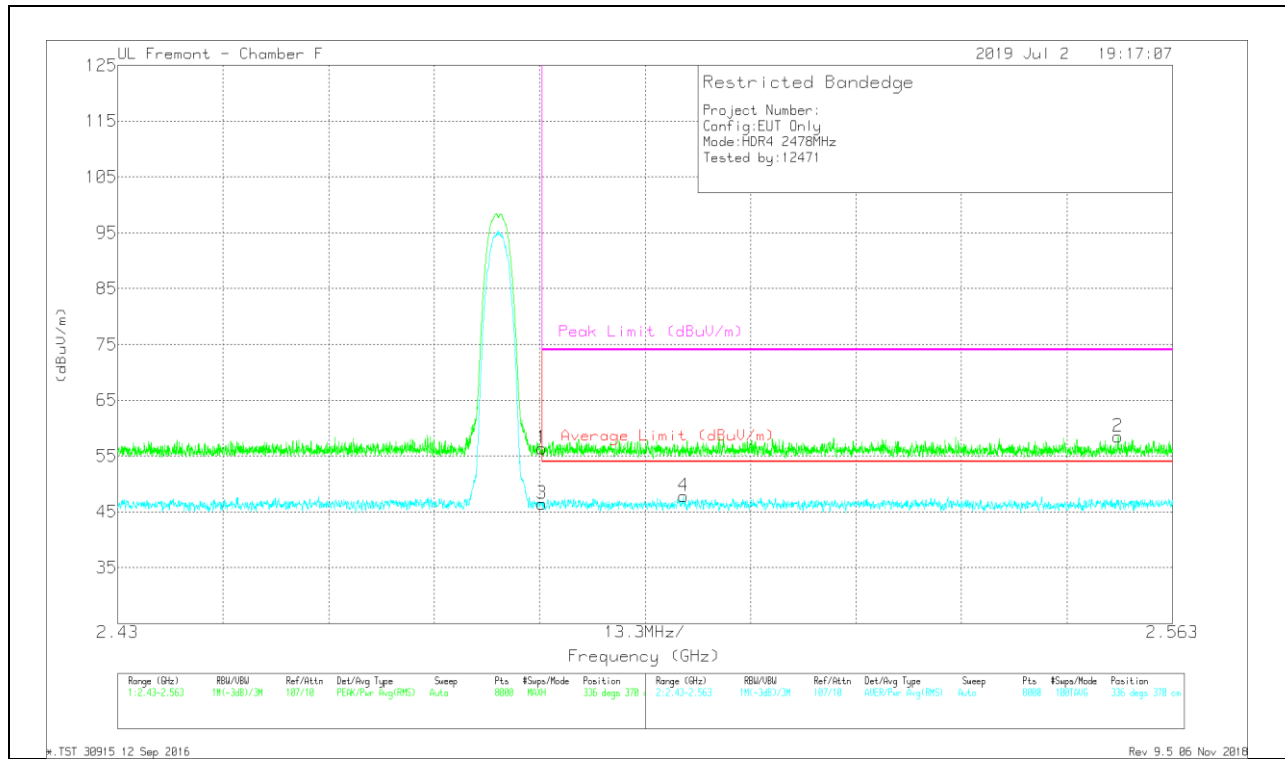

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.64	Pk	32.4	-14.7	56.34	-	-	74	-17.66	336	370	V
2	2.556	40.63	Pk	32.3	-14.5	58.43	-	-	74	-15.57	336	370	V
3	* 2.484	28.75	RMS	32.4	-14.7	46.45	54	-7.55	-	-	336	370	V
4	2.501	30.09	RMS	32.4	-14.7	47.79	54	-6.21	-	-	336	370	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

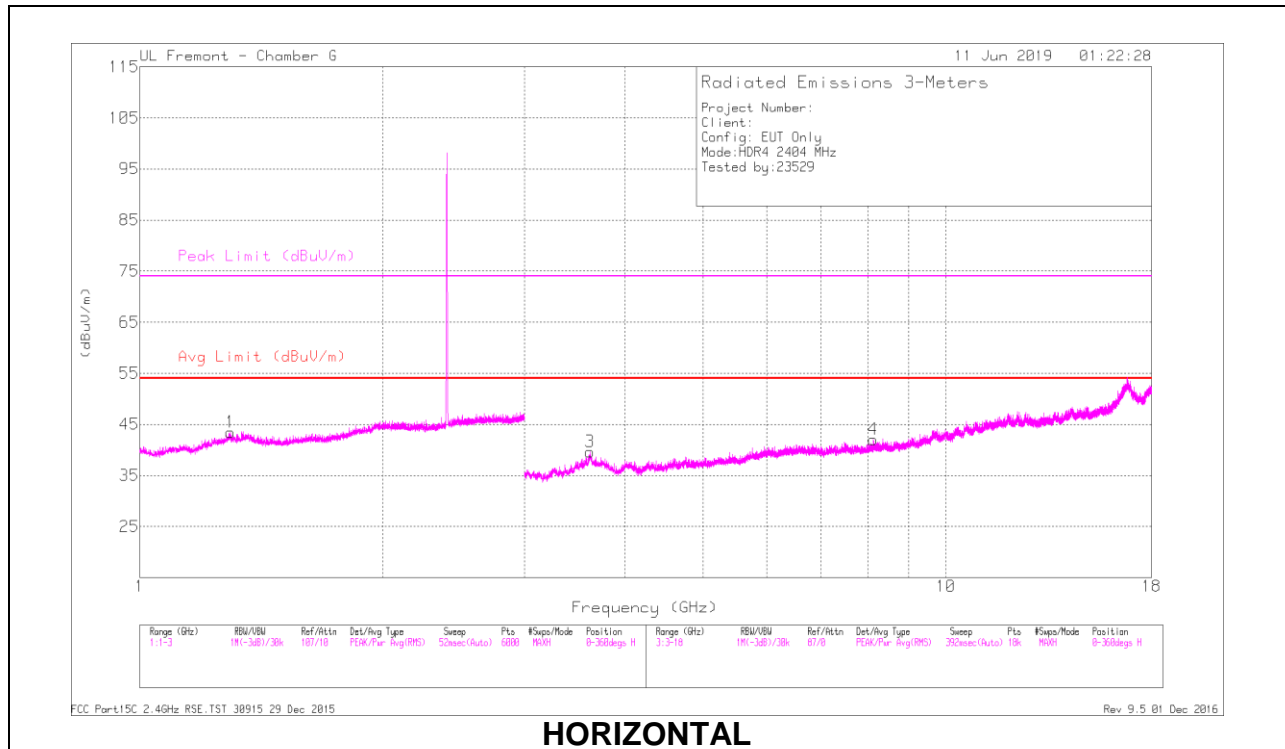

HORIZONTAL

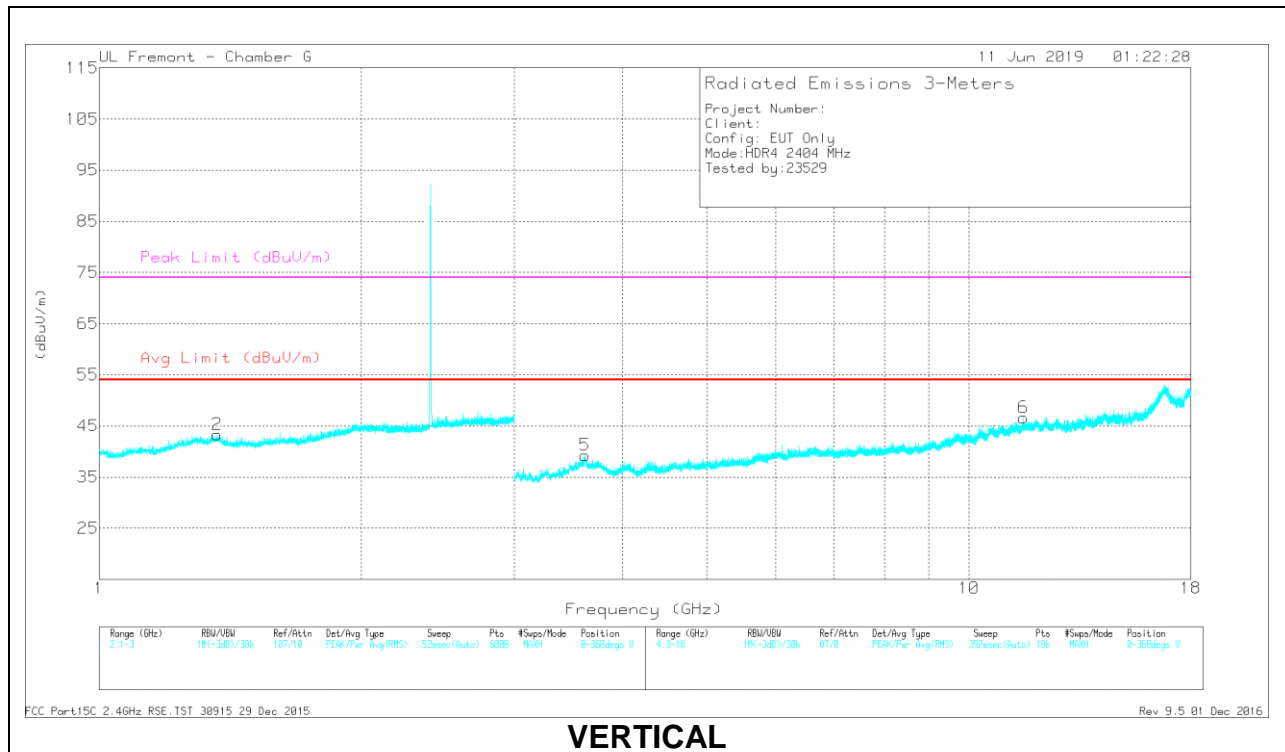

VERTICAL

RADIATED EMISSIONS


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.295	43.85	PK2	29.9	-23.5	50.25	-	-	74	-23.75	0	101	H
	* 1.297	32.25	MAv1	29.7	-23.5	38.45	54	-15.55	-	-	0	101	H
2	* 1.366	43.54	PK2	30	-23.2	50.34	-	-	74	-23.66	0	101	V
	* 1.366	32.04	MAv1	30	-23.2	38.84	54	-15.16	-	-	0	101	V
3	* 3.618	40.99	PK2	35.7	-30.1	46.59	-	-	74	-27.41	0	101	H
	* 3.619	29.86	MAv1	35.7	-30	35.56	54	-18.44	-	-	0	101	H
4	* 8.122	38.55	PK2	36.1	-26.6	48.05	-	-	74	-25.95	0	101	H
	* 8.122	27.52	MAv1	36.1	-26.6	37.02	54	-16.98	-	-	0	101	H
5	* 3.62	41.19	PK2	35.7	-30	46.89	-	-	74	-27.11	0	101	V
	* 3.622	29.86	MAv1	35.7	-29.9	35.66	54	-18.34	-	-	0	101	V
6	* 11.559	36.49	PK2	39.1	-22.9	52.69	-	-	74	-21.31	0	101	V
	* 11.558	25.27	MAv1	39.1	-22.9	41.47	54	-12.53	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

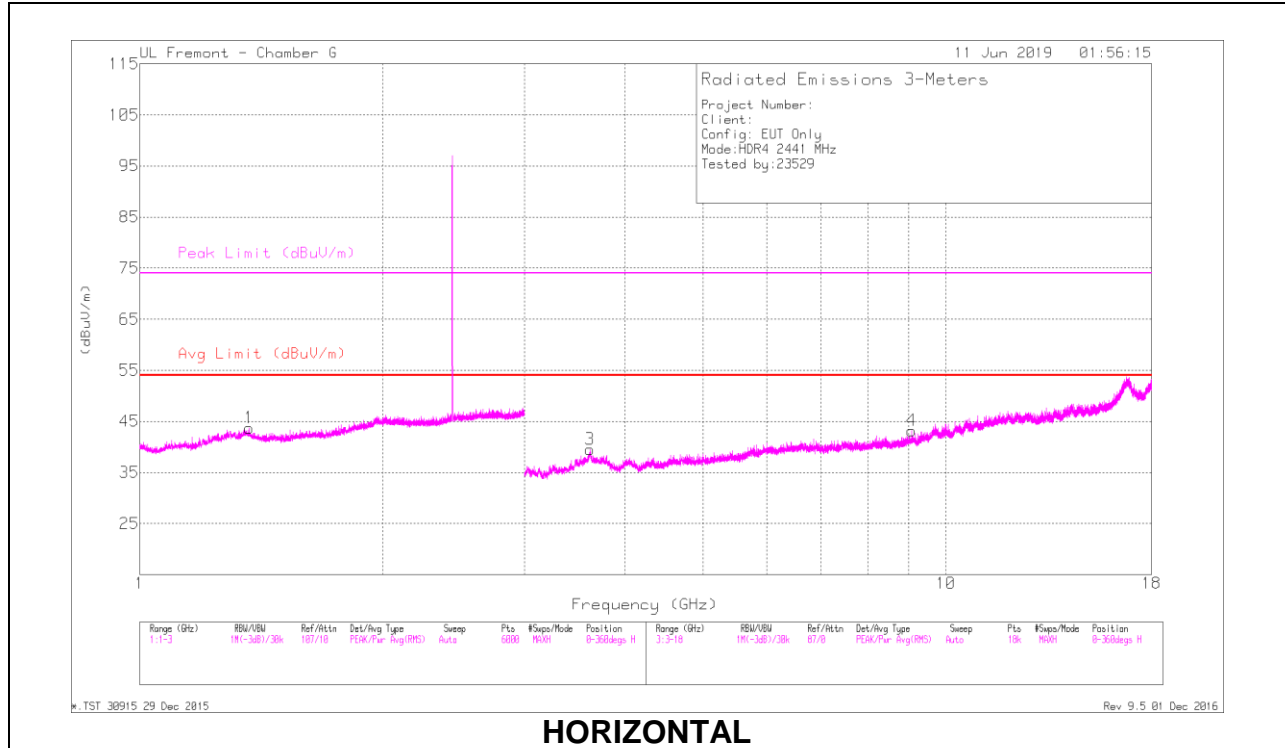

HORIZONTAL

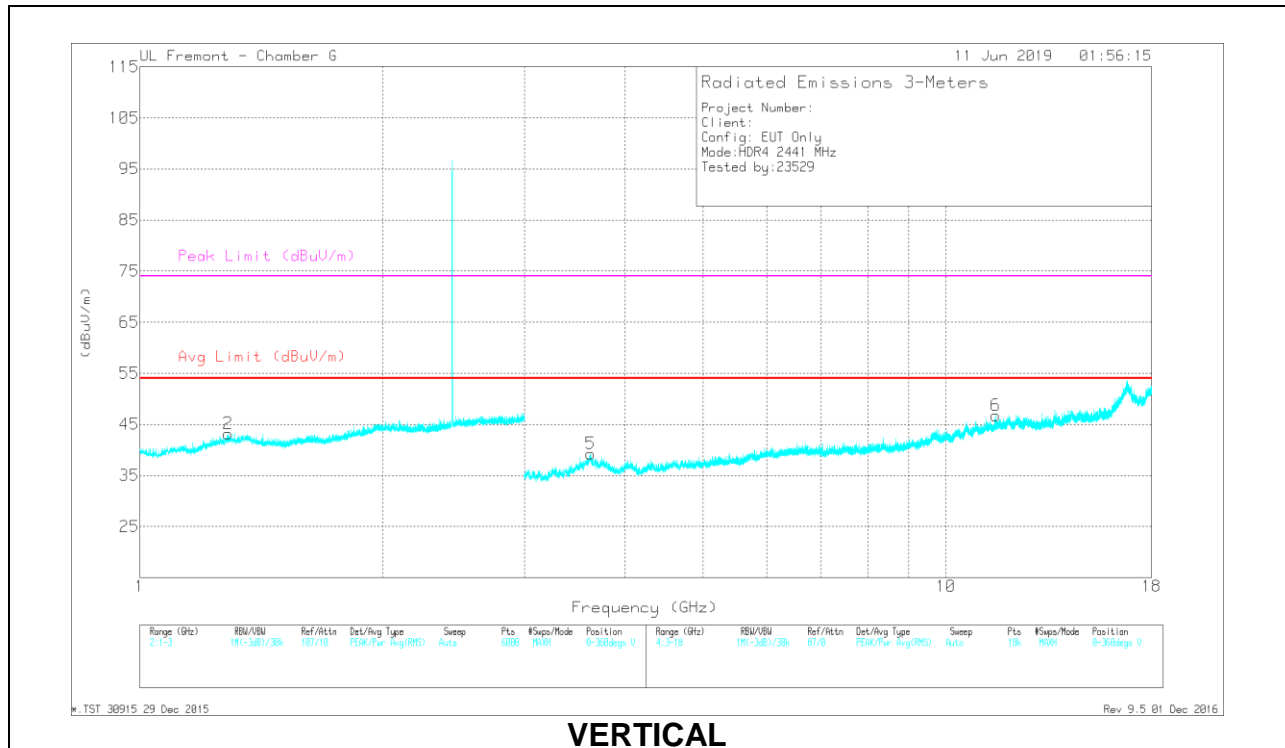

VERTICAL

RADIATED EMISSIONS


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.368	44.63	PK2	30	-23.2	51.43	-	-	74	-22.57	0	101	H
	* 1.365	31.99	MAv1	30	-23.2	38.79	54	-15.21	-	-	0	101	H
2	* 1.287	43.44	PK2	29.8	-23.5	49.74	-	-	74	-24.26	0	101	V
	* 1.288	32.33	MAv1	29.8	-23.5	38.63	54	-15.37	-	-	0	101	V
3	* 3.62	41.51	PK2	35.7	-30	47.21	-	-	74	-26.79	0	101	H
	* 3.623	29.78	MAv1	35.6	-29.9	35.48	54	-18.52	-	-	0	101	H
4	* 9.07	38.11	PK2	36.5	-25.2	49.41	-	-	74	-24.59	0	101	H
	* 9.07	26.63	MAv1	36.5	-25.2	37.93	54	-16.07	-	-	0	101	H
5	* 3.627	40.62	PK2	35.3	-29.8	46.12	-	-	74	-27.88	0	101	V
	* 3.623	29.77	MAv1	35.6	-29.9	35.47	54	-18.53	-	-	0	101	V
6	* 11.535	36.45	PK2	39.1	-22.9	52.65	-	-	74	-21.35	0	101	V
	* 11.533	25.29	MAv1	39	-22.9	41.39	54	-12.61	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

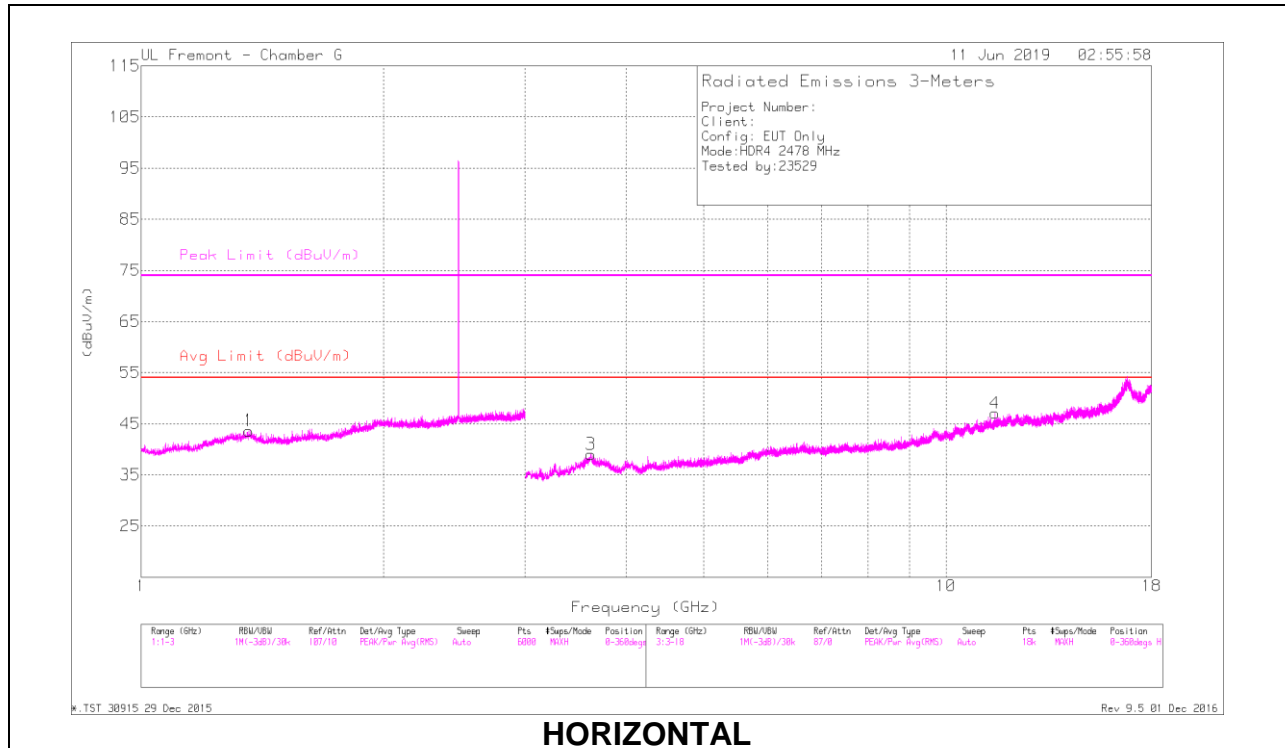

HORIZONTAL

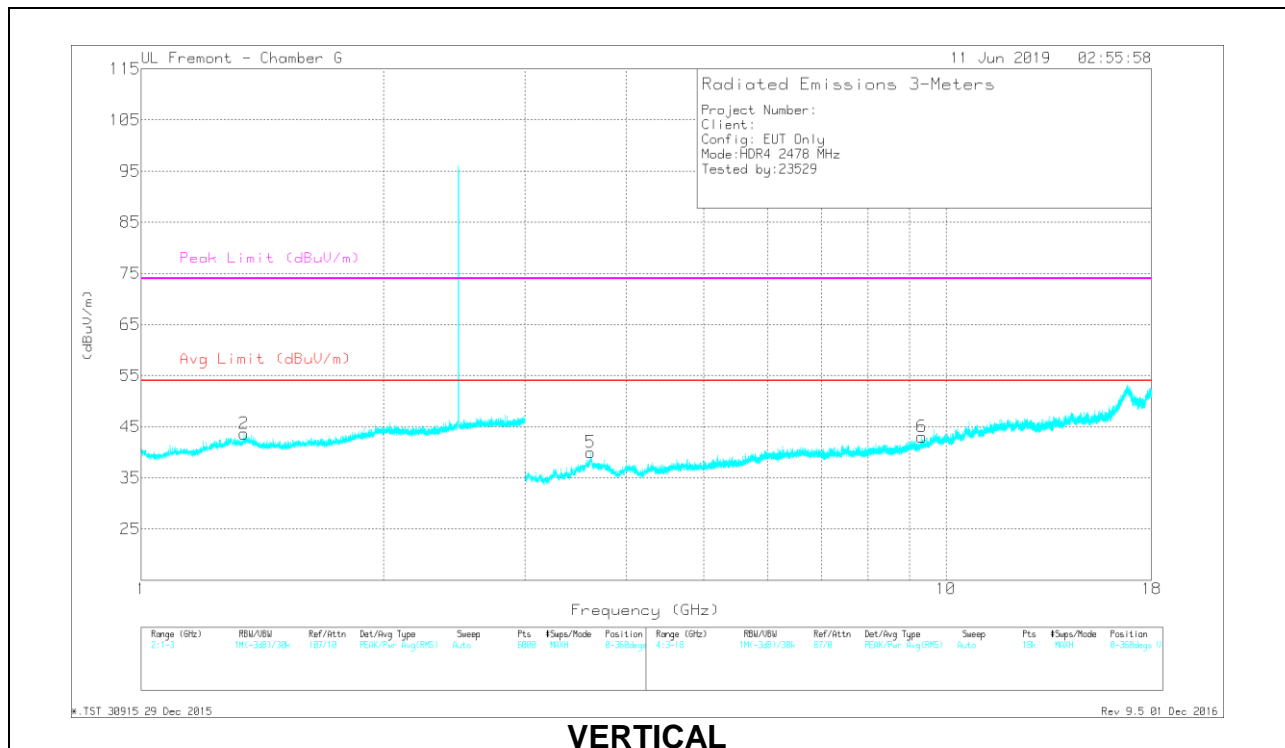

VERTICAL

RADIATED EMISSIONS

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.362	44.13	PK2	29.9	-23.2	50.83	-	-	74	-23.17	0	101	H
	* 1.36	32.04	MAv1	29.9	-23.3	38.64	54	-15.36	-	-	0	101	H
2	* 1.343	43.94	PK2	29.8	-23.3	50.44	-	-	74	-23.56	0	101	V
	* 1.34	32.03	MAv1	29.9	-23.3	38.63	54	-15.37	-	-	0	101	V
3	* 3.62	41.25	PK2	35.7	-30	46.95	-	-	74	-27.05	0	101	H
	* 3.618	30	MAv1	35.7	-30.1	35.6	54	-18.4	-	-	0	101	H
4	* 11.498	36.9	PK2	38.9	-22.8	53	-	-	74	-21	0	101	H
	* 11.501	25.52	MAv1	38.9	-22.7	41.72	54	-12.28	-	-	0	101	H
5	* 3.617	41.25	PK2	35.7	-30.1	46.85	-	-	74	-27.15	0	101	V
	* 3.62	29.83	MAv1	35.7	-30	35.53	54	-18.47	-	-	0	101	V
6	* 9.332	38.09	PK2	36.8	-25.3	49.59	-	-	74	-24.41	0	101	V
	* 9.332	26.7	MAv1	36.8	-25.3	38.2	54	-15.8	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

9.2.4. LOW POWER HDR (HDR8)

Antenna 4

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

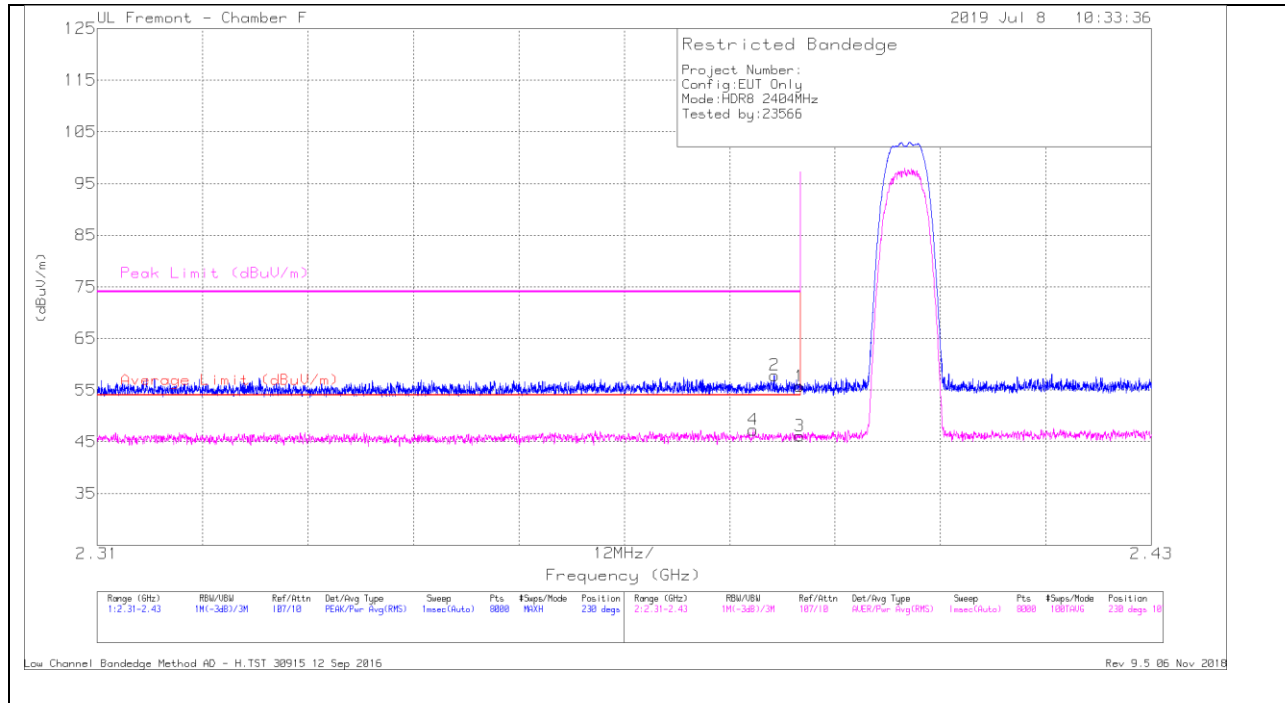

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Amp/Cb/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.24	Pk	32	-14.5	55.74	-	-	74	-18.26	230	107	H
2	* 2.387	40.47	Pk	31.9	-14.5	57.87	-	-	74	-16.13	230	107	H
3	* 2.39	28.61	RMS	32	-14.5	46.11	54	-7.89	-	-	230	107	H
4	* 2.385	29.91	RMS	31.9	-14.5	47.31	54	-6.69	-	-	230	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

Low Channel Bandedge Method AD - H.TST 30915 12 Sep 2016

Rev 9.5 06 Nov 2018

VERTICAL RESULT

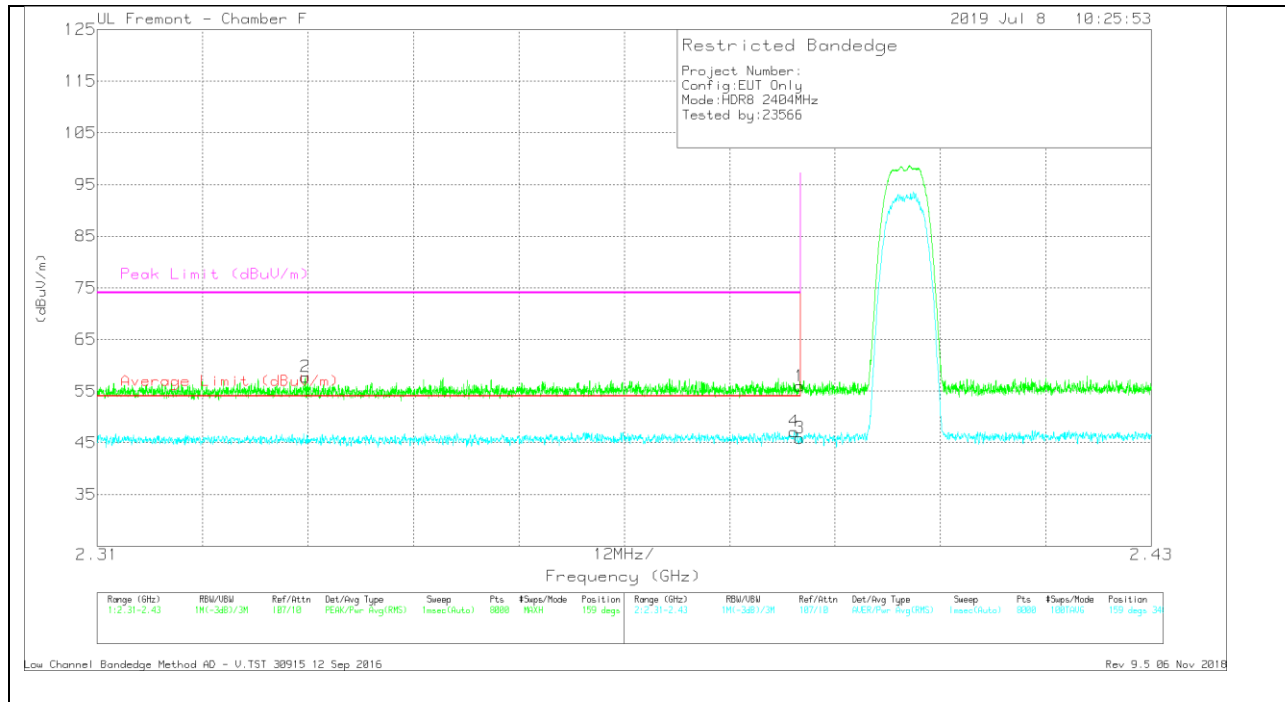

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.47	Pk	32	-14.5	55.97	-	-	74	-18.03	159	340	V
2	* 2.334	40.65	Pk	31.6	-14.5	57.75	-	-	74	-16.25	159	340	V
3	* 2.39	28.42	RMS	32	-14.5	45.92	54	-8.08	-	-	159	340	V
4	* 2.389	29.67	RMS	32	-14.5	47.17	54	-6.83	-	-	159	340	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

Low Channel Bandedge Method AD - V.TST 30915 12 Sep 2016

Rev 9.5 06 Nov 2018

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

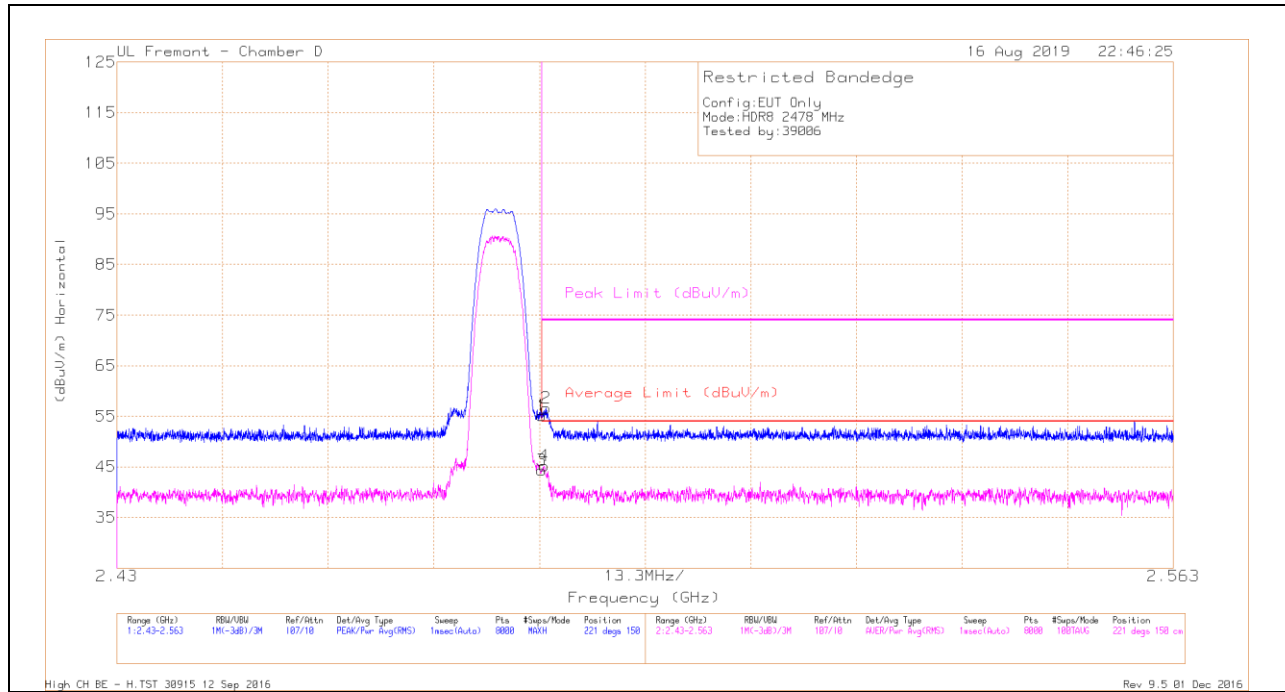

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.38	Pk	32.4	-20.6	55.18	-	-	74	-18.82	221	150	H
2	* 2.484	44.89	Pk	32.3	-20.6	56.59	-	-	74	-17.41	221	150	H
3	* 2.484	32.57	RMS	32.4	-20.6	44.37	54	-9.63	-	-	221	150	H
4	* 2.484	33.44	RMS	32.4	-20.6	45.24	54	-8.76	-	-	221	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

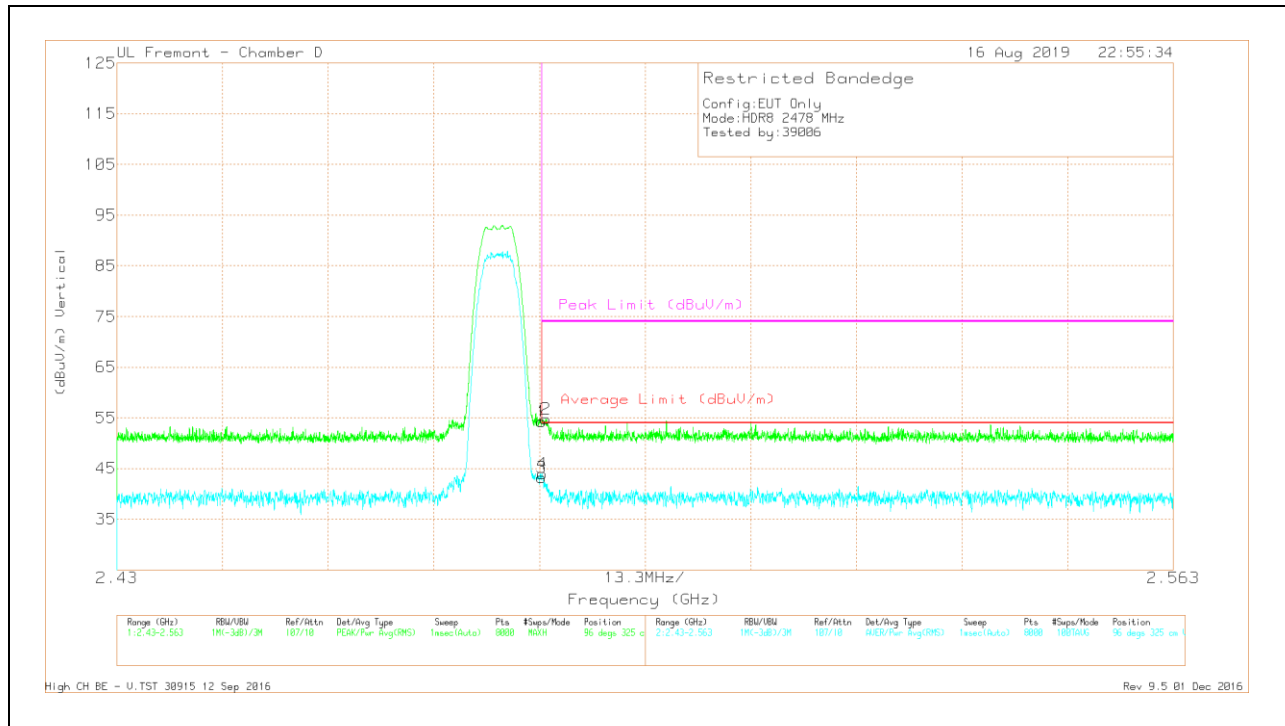


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.52	Pk	32.4	-20.6	54.32	-	-	74	-19.68	96	325	V
2	* 2.484	43.1	Pk	32.3	-20.6	54.8	-	-	74	-19.2	96	325	V
3	* 2.484	31.45	RMS	32.4	-20.6	43.25	54	-10.75	-	-	96	325	V
4	* 2.484	32.13	RMS	32.4	-20.6	43.93	54	-10.07	-	-	96	325	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

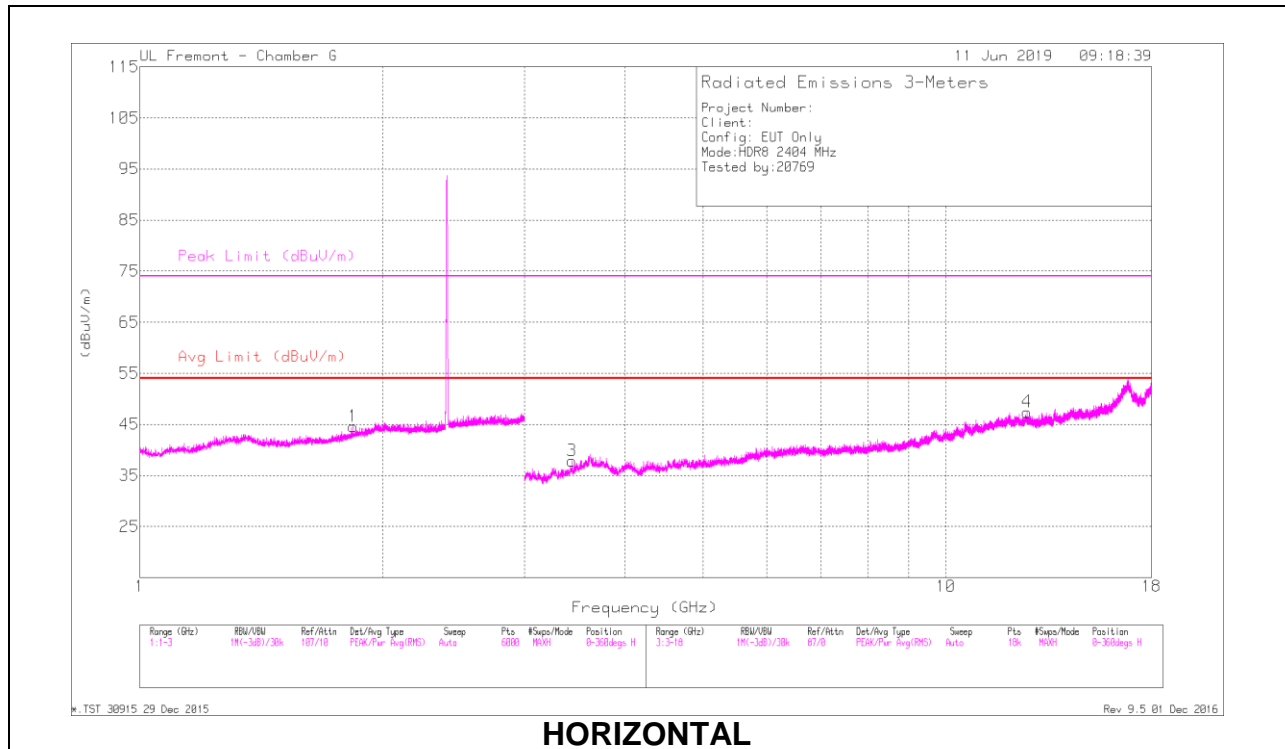

HORIZONTAL

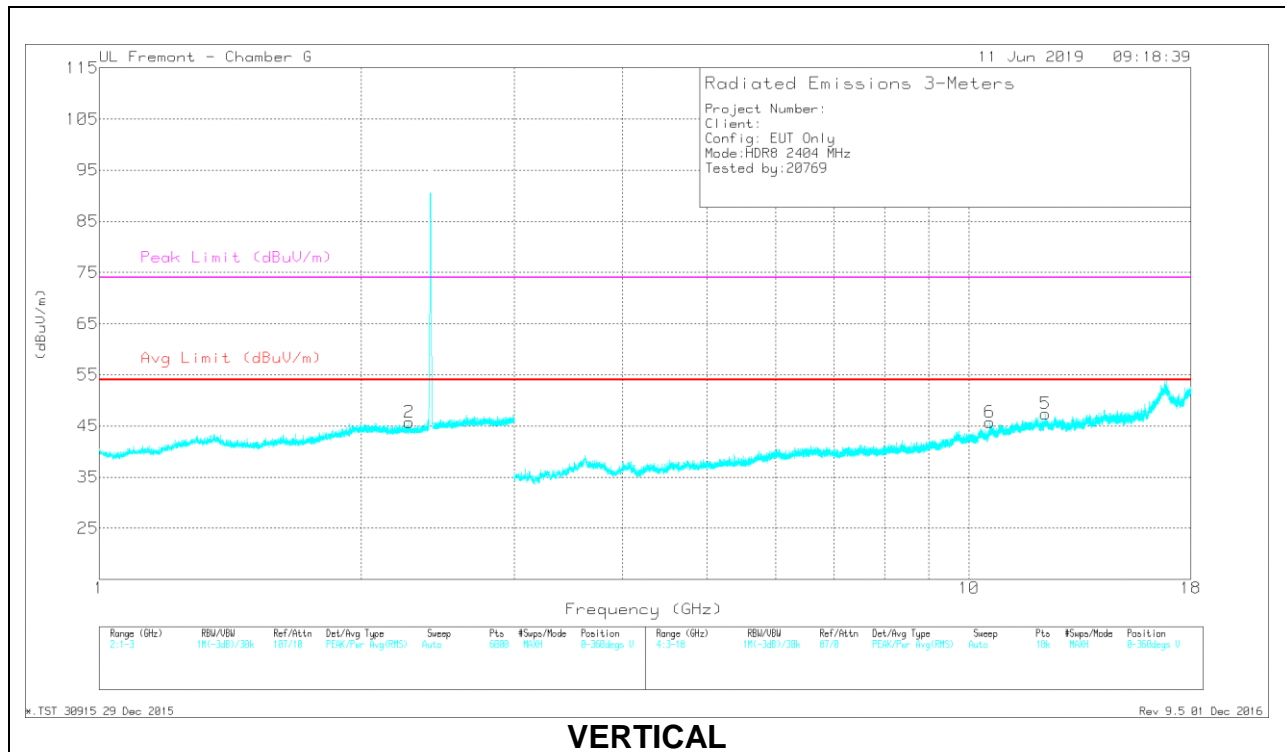

VERTICAL

RADIATED EMISSIONS


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.274	43.71	PK2	31.7	-22.4	53.01	-	-	74	-20.99	168	152	V
	* 2.272	31.64	MAv1	31.7	-22.4	40.94	54	-13.06	-	-	168	152	V
4	* 12.61	36.75	PK2	39.7	-22.8	53.65	-	-	74	-20.35	99	391	H
	* 12.609	24.98	MAv1	39.7	-22.9	41.78	54	-12.22	-	-	99	391	H
5	* 12.253	35.97	PK2	39.5	-22.3	53.17	-	-	74	-20.83	277	135	V
	* 12.253	24.42	MAv1	39.5	-22.3	41.62	54	-12.38	-	-	277	135	V
1	1.837	42.86	PK2	30.8	-22.5	51.16	-	-	-	-	219	306	H
	1.838	30.77	MAv1	30.8	-22.5	39.07	-	-	-	-	219	306	H
3	3.438	28.15	MAv1	34	-30	32.15	-	-	-	-	208	304	H
	3.44	40.2	PK2	34	-29.9	44.3	-	-	-	-	208	304	H
6	10.575	25.42	MAv1	38	-23.4	40.02	-	-	-	-	290	205	V
	10.576	36.92	PK2	38	-23.4	51.52	-	-	-	-	290	205	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

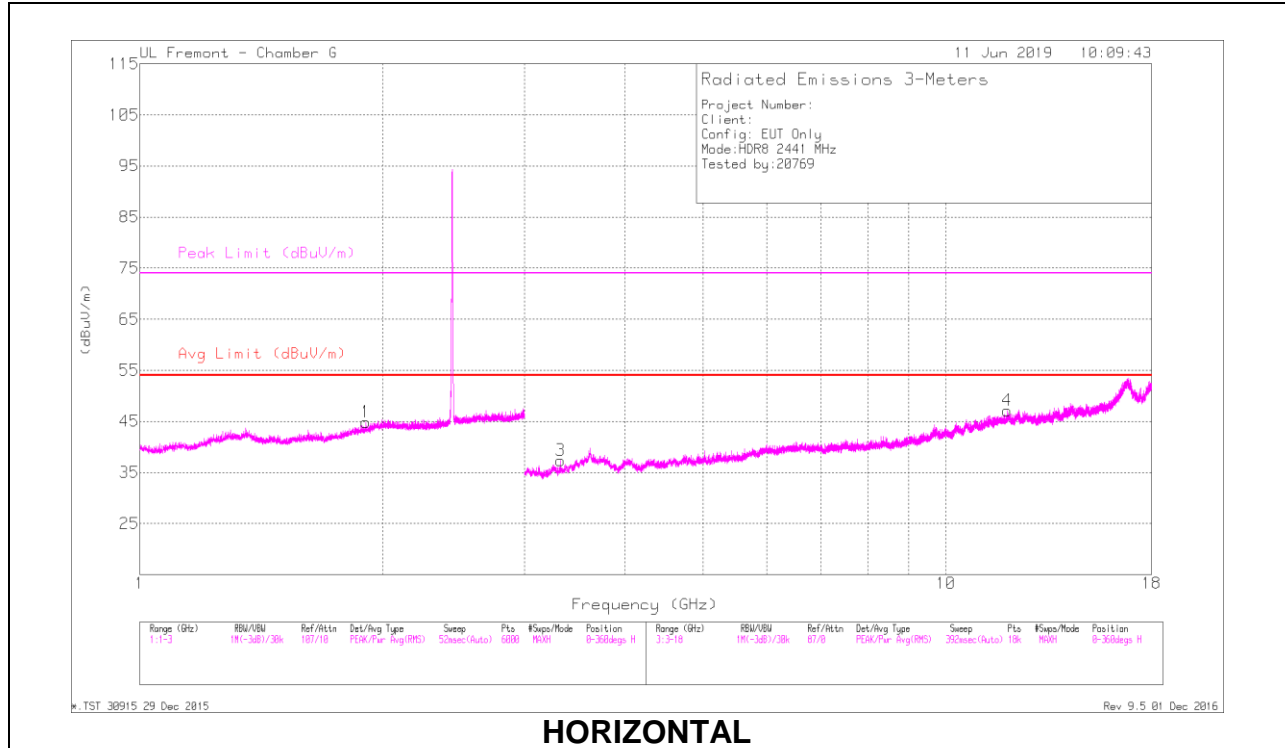

HORIZONTAL

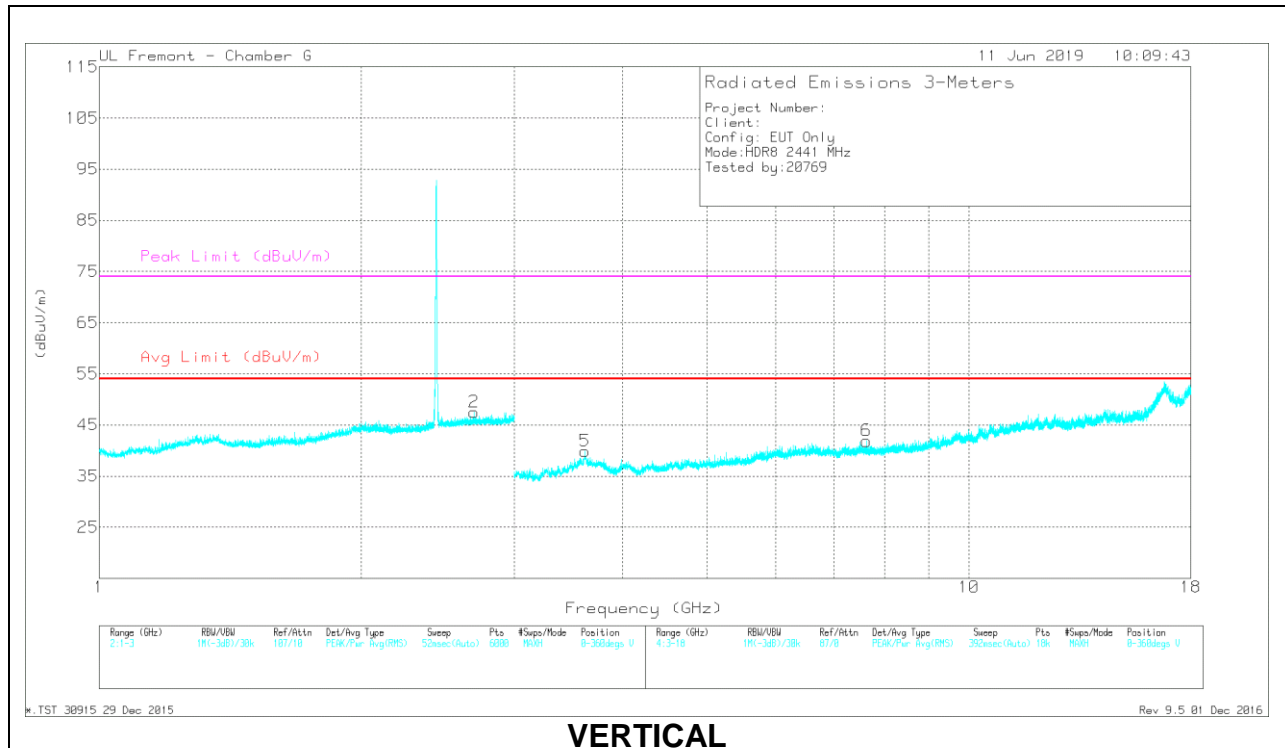

VERTICAL

RADIATED EMISSIONS


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.697	43.56	PK2	32.7	-22	54.26	-	-	74	-19.74	112	157	V
	* 2.695	31.44	MAv1	32.7	-22	42.14	54	-11.86	-	-	112	157	V
4	* 11.924	35.76	PK2	39.4	-22.5	52.66	-	-	74	-21.34	346	262	H
	* 11.92	24.57	MAv1	39.4	-22.6	41.37	54	-12.63	-	-	346	262	H
5	* 3.621	40.34	PK2	35.7	-30	46.04	-	-	74	-27.96	87	124	V
	* 3.62	28.86	MAv1	35.7	-30	34.56	54	-19.44	-	-	87	124	V
6	* 7.621	38.37	PK2	36.1	-27.3	47.17	-	-	74	-26.83	344	228	V
	* 7.623	26.95	MAv1	36.1	-27.3	35.75	54	-18.25	-	-	344	228	V
1	1.907	30.7	MAv1	31.4	-22.7	39.4	-	-	-	-	33	303	H
	1.908	43.12	PK2	31.4	-22.7	51.82	-	-	-	-	33	303	H
3	3.325	28.96	MAv1	33.4	-30.5	31.86	-	-	-	-	263	305	H
	3.326	41.32	PK2	33.5	-30.5	44.32	-	-	-	-	263	305	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

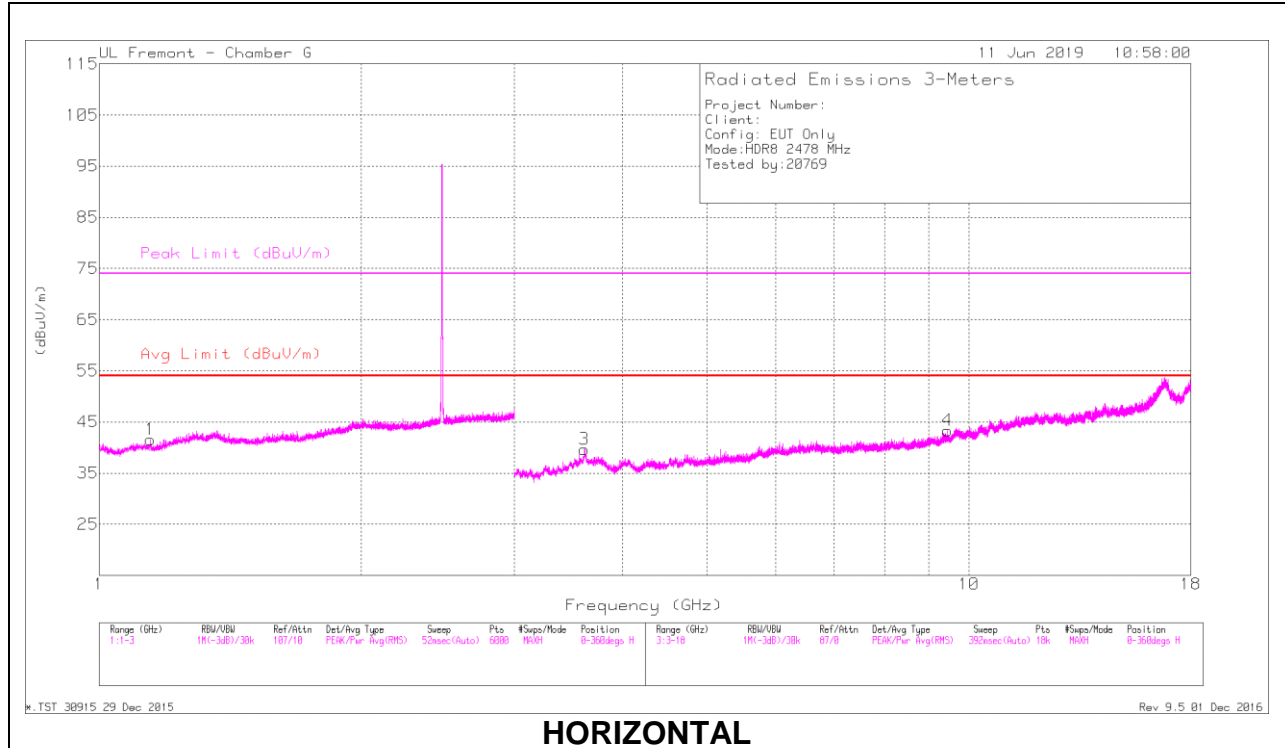

HORIZONTAL

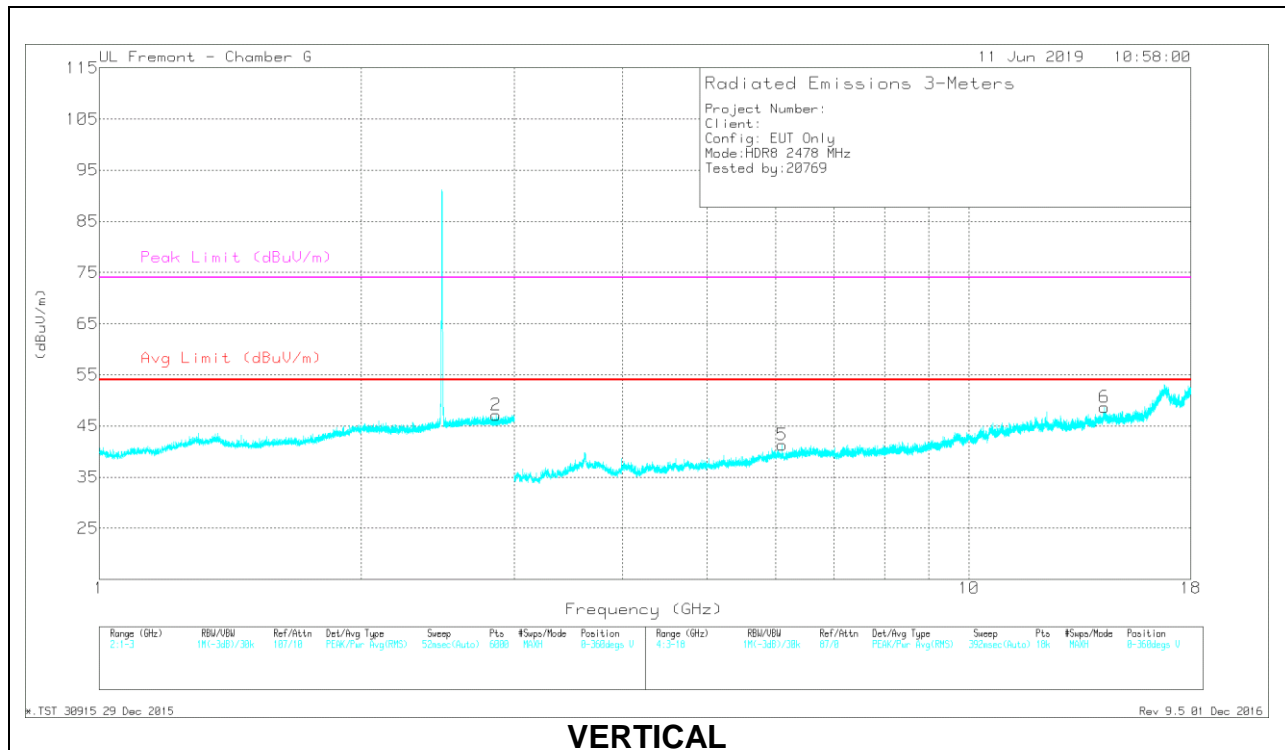

VERTICAL

RADIATED EMISSIONS


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.146	44.23	PK2	27.8	-23.7	48.33	-	-	74	-25.67	91	151	H
	* 1.143	31.87	MAv1	27.8	-23.7	35.97	54	-18.03	-	-	91	151	H
2	* 2.859	42.81	PK2	32.7	-21.9	53.61	-	-	74	-20.39	234	318	V
	* 2.857	30.88	MAv1	32.7	-21.9	41.68	54	-12.32	-	-	234	318	V
3	* 3.609	40.76	PK2	35.1	-30.3	45.56	-	-	74	-28.44	246	307	H
	* 3.613	29.04	MAv1	35.4	-30.2	34.24	54	-19.76	-	-	246	307	H
4	* 9.458	38.89	PK2	37.2	-25.7	50.39	-	-	74	-23.61	108	172	H
	* 9.458	26.28	MAv1	37.2	-25.7	37.78	54	-16.22	-	-	108	172	H
5	6.101	40.45	PK2	35.7	-29.3	46.85	-	-	-	-	308	400	V
6	14.319	37.29	PK2	40.1	-22.4	54.99	-	-	-	-	168	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

Antenna 3

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

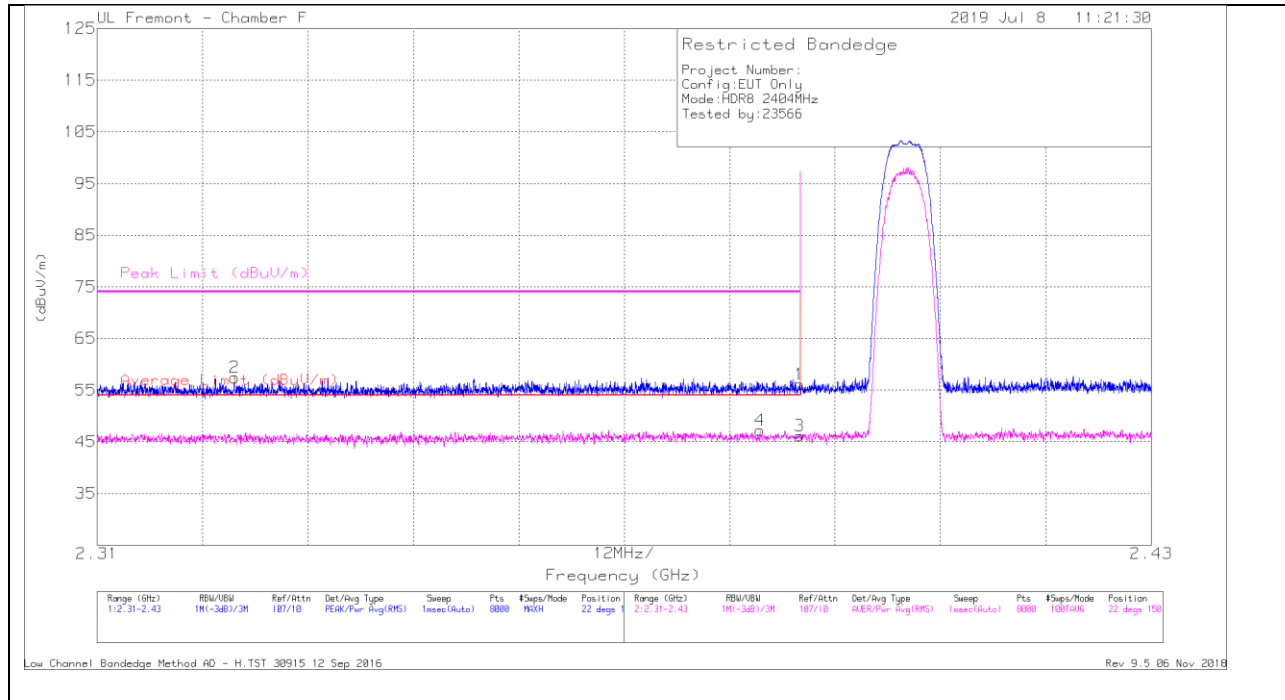

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.58	Pk	32	-14.5	56.08	-	-	74	-17.92	22	150	H
2	* 2.326	40.22	Pk	31.7	-14.5	57.42	-	-	74	-16.58	22	150	H
3	* 2.39	28.63	RMS	32	-14.5	46.13	54	-7.87	-	-	22	150	H
4	* 2.385	29.81	RMS	31.9	-14.5	47.21	54	-6.79	-	-	22	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

Low Channel Bandedge Method AD - H.TST 30915 12 Sep 2016

Rev 9.5 06 Nov 2018

VERTICAL RESULT

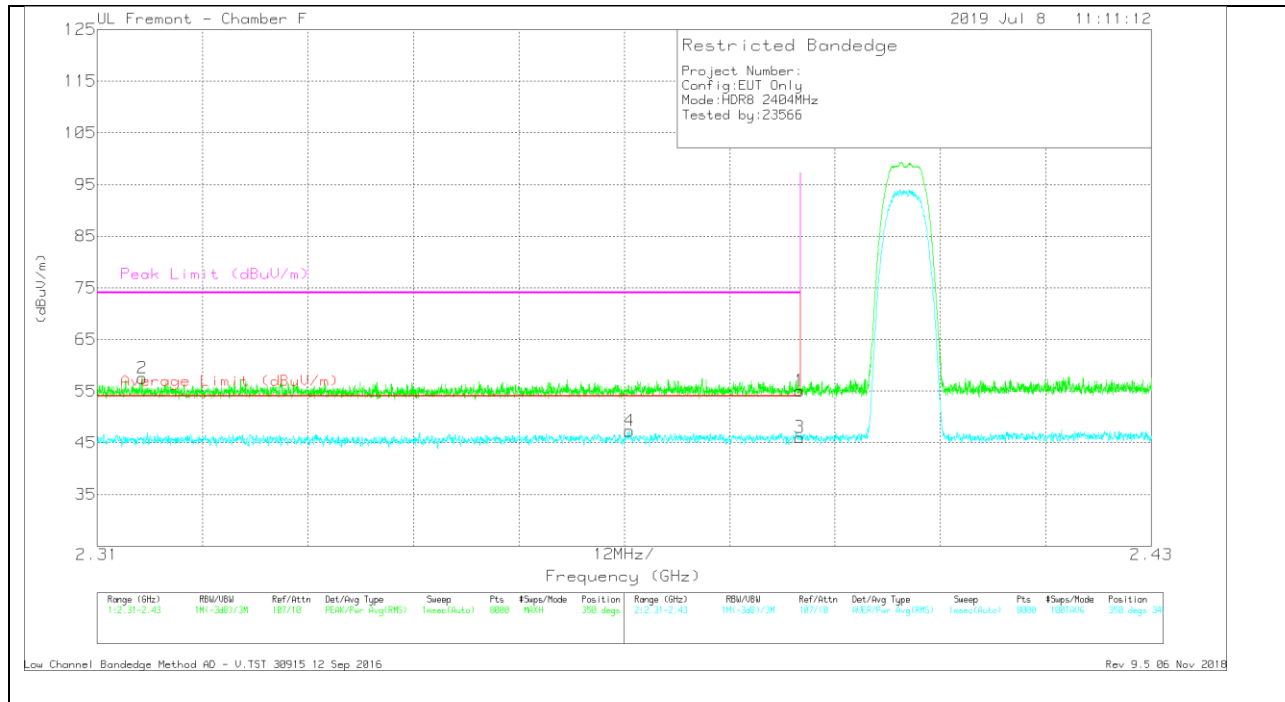

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dBm)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.55	Pk	32	-14.5	55.05	-	-	74	-18.95	350	345	V
2	* 2.315	40.32	Pk	31.7	-14.5	57.52	-	-	74	-16.48	350	345	V
3	* 2.39	28.54	RMS	32	-14.5	46.04	54	-7.96	-	-	350	345	V
4	* 2.371	29.91	RMS	31.9	-14.5	47.31	54	-6.69	-	-	350	345	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

Low Channel Bandedge Method AD - V.TST 30915 12 Sep 2016

Rev 9.5 06 Nov 2018

BANDEGE (HIGH CHANNEL)


HORIZONTAL RESULT

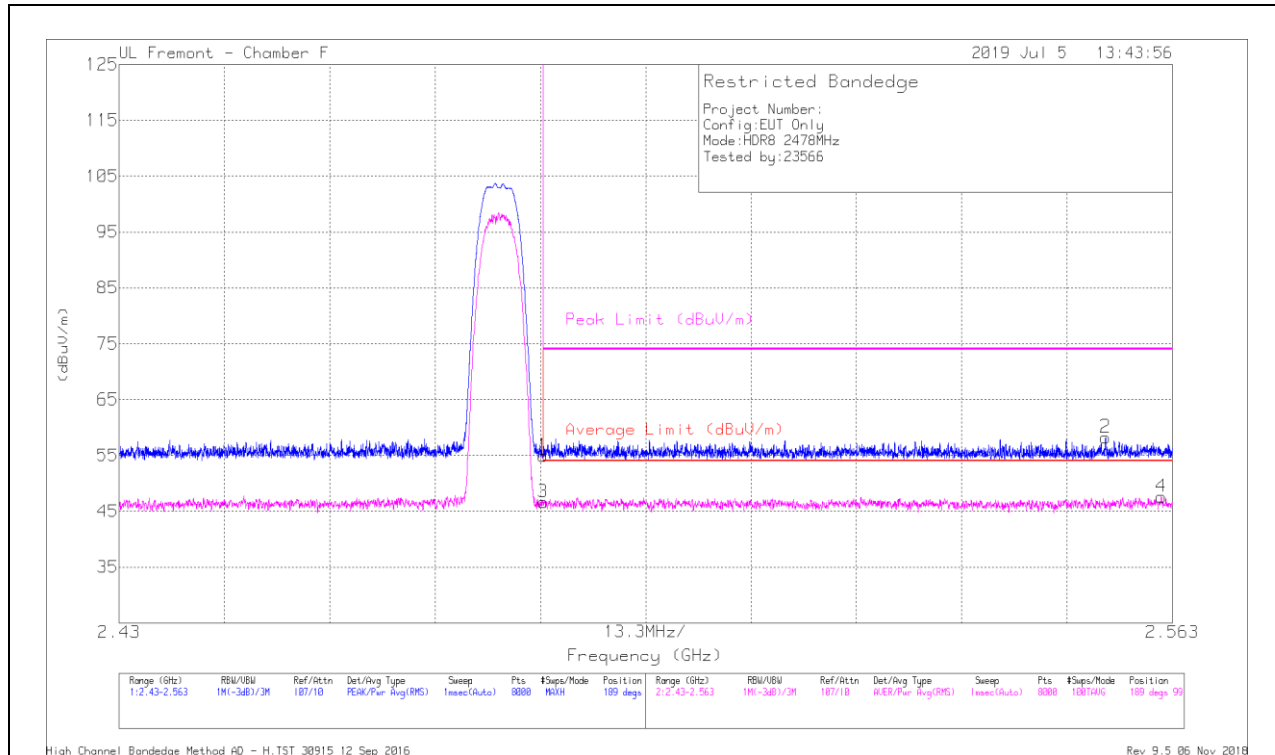

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.19	Pk	32.4	-14.7	54.89	-	-	74	-19.11	189	99	H
2	2.555	40.4	Pk	32.3	-14.5	58.2	-	-	74	-15.8	189	99	H
3	* 2.484	28.92	RMS	32.4	-14.7	46.62	54	-7.38	-	-	189	99	H
4	2.562	29.77	RMS	32.4	-14.6	47.57	54	-6.43	-	-	189	99	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

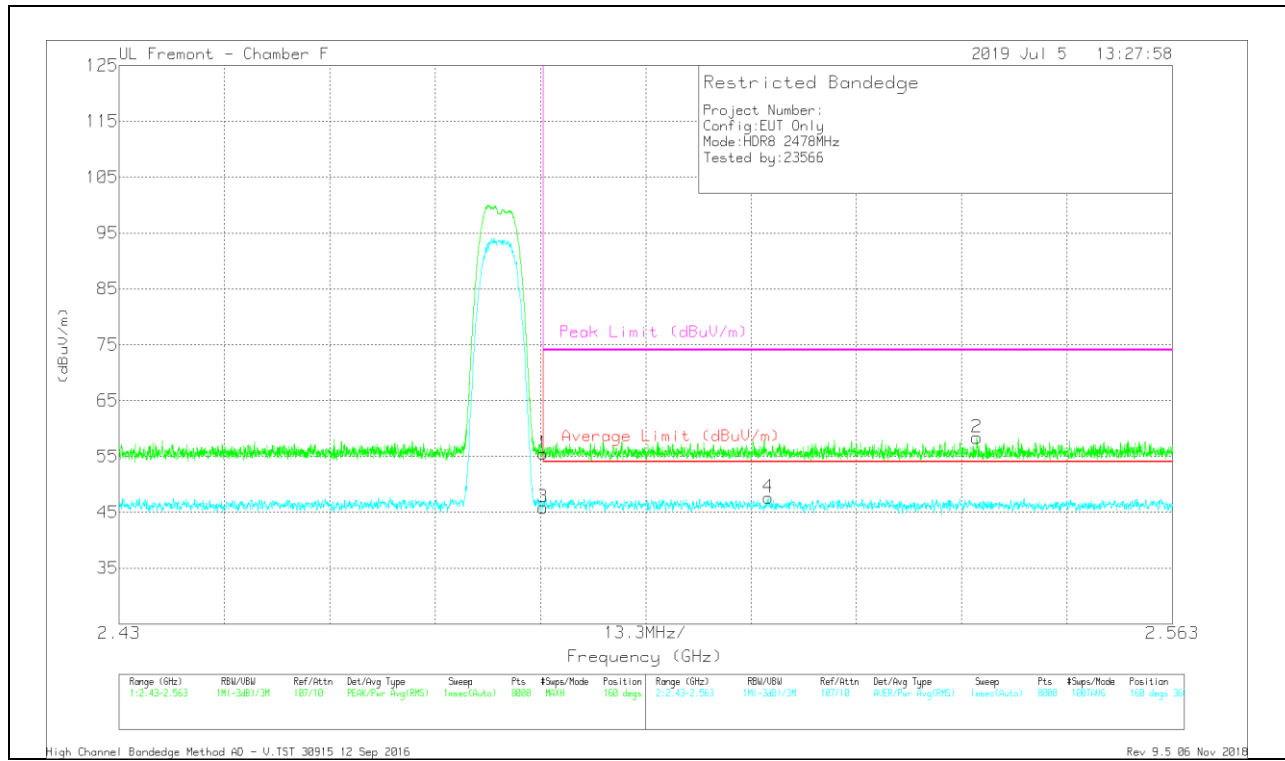


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.79	Pk	32.4	-14.7	55.49	-	-	74	-18.51	160	360	V
2	2.538	40.78	Pk	32.3	-14.7	58.38	-	-	74	-15.62	160	360	V
3	* 2.484	28.15	RMS	32.4	-14.7	45.85	54	-8.15	-	-	160	360	V
4	2.512	29.94	RMS	32.4	-14.7	47.64	54	-6.36	-	-	160	360	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

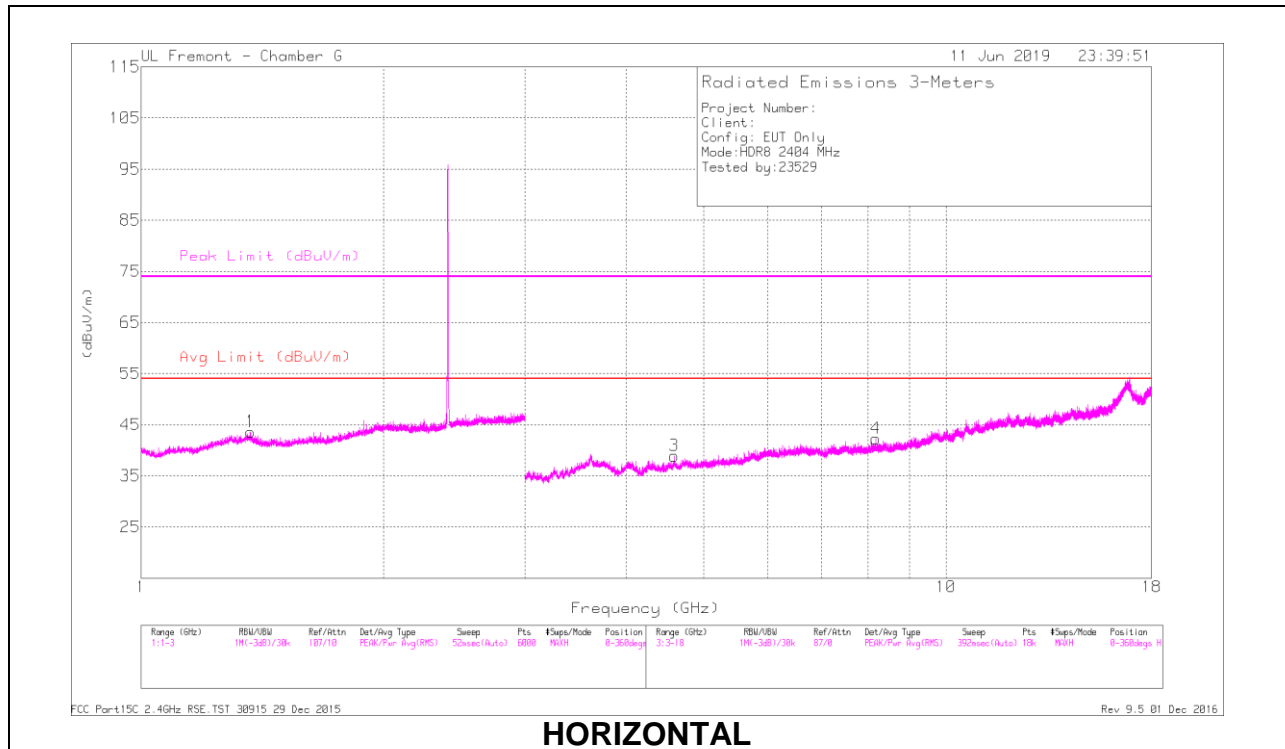

HORIZONTAL

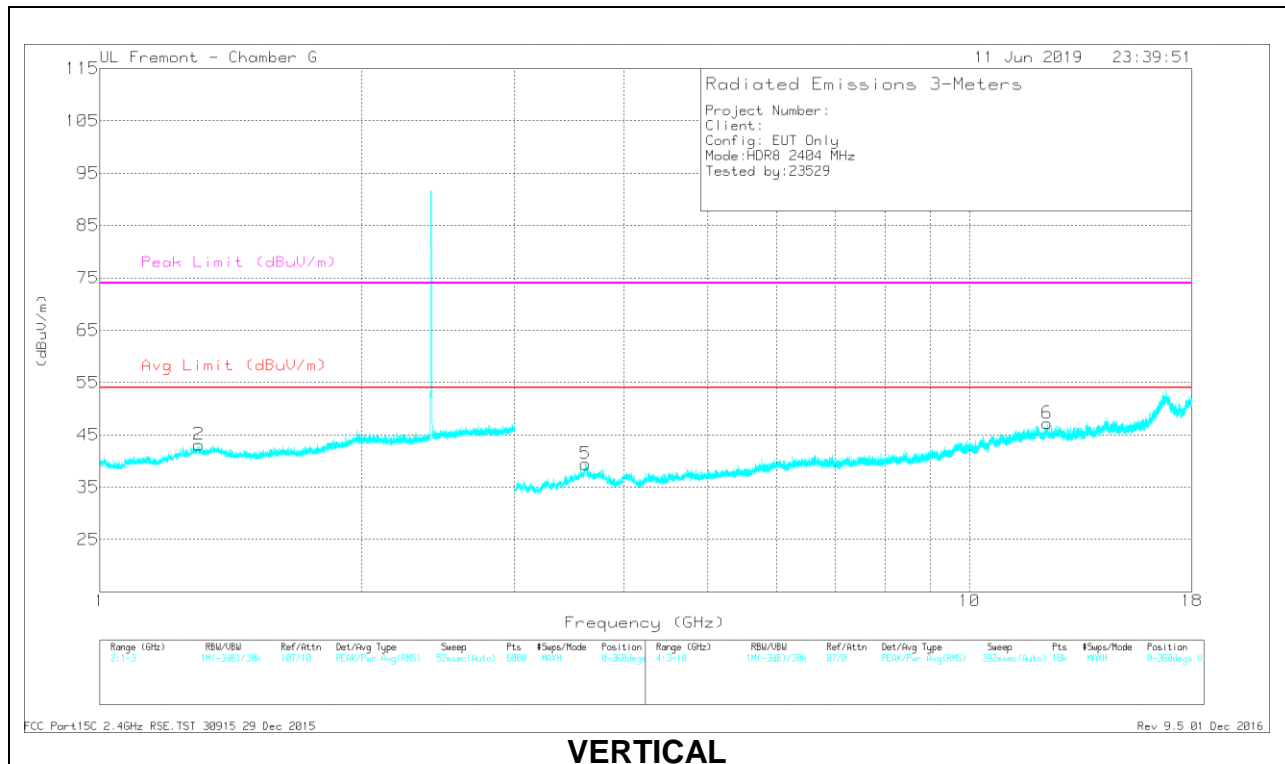

VERTICAL

RADIATED EMISSIONS


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.368	43.03	PK2	30	-23.2	49.83	-	-	74	-24.17	0	101	H
	* 1.366	31.49	MAv1	30	-23.2	38.29	54	-15.71	-	-	0	101	H
2	* 1.299	43.95	PK2	29.7	-23.5	50.15	-	-	74	-23.85	0	101	V
	* 1.299	32.11	MAv1	29.7	-23.5	38.31	54	-15.69	-	-	0	101	V
3	* 4.595	40.85	PK2	34.3	-29.6	45.55	-	-	74	-28.45	0	101	H
	* 4.595	29.41	MAv1	34.3	-29.6	34.11	54	-19.89	-	-	0	101	H
4	* 8.183	38.68	PK2	36.1	-26.5	48.28	-	-	74	-25.72	0	101	H
	* 8.183	27.44	MAv1	36.1	-26.5	37.04	54	-16.96	-	-	0	101	H
5	* 3.617	39.93	PK2	35.7	-30.1	45.53	-	-	74	-28.47	0	101	V
	* 3.62	29.01	MAv1	35.7	-30	34.71	54	-19.29	-	-	0	101	V
6	* 12.284	36.04	PK2	39.5	-22.2	53.34	-	-	74	-20.66	0	101	V
	* 12.281	25.16	MAv1	39.5	-22.2	42.46	54	-11.54	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

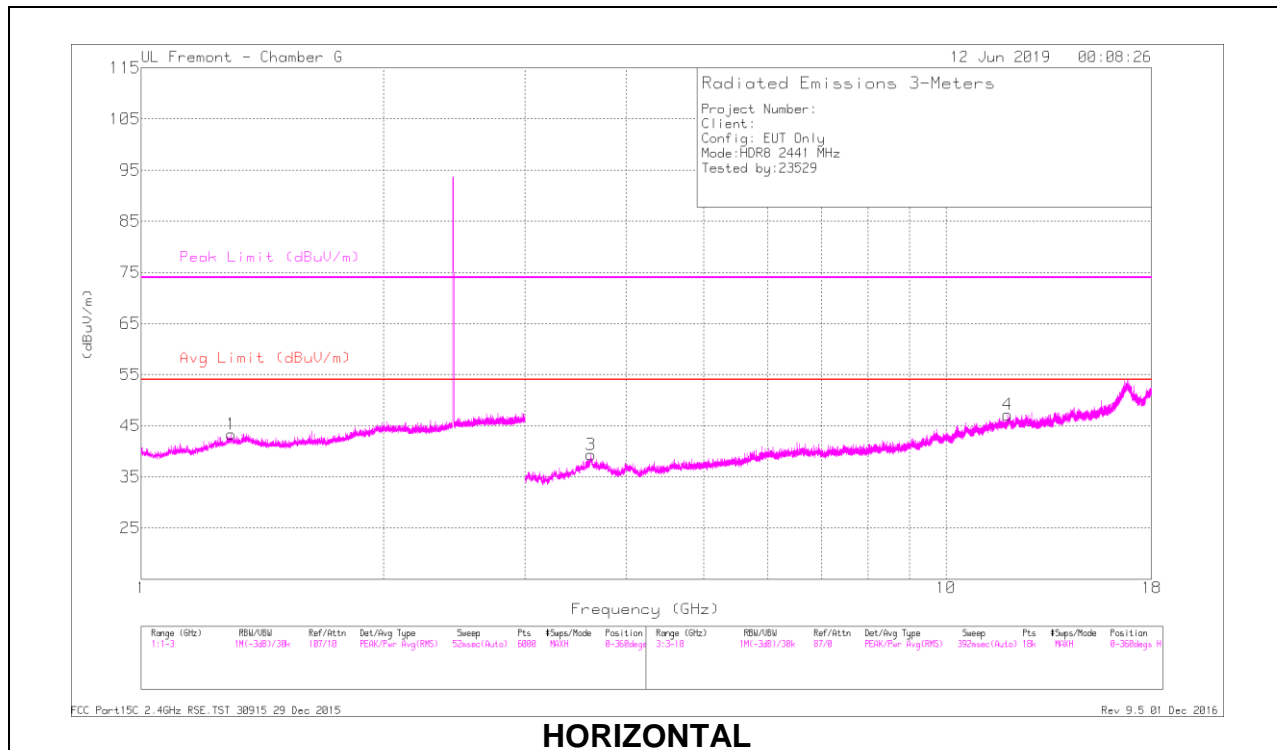

HORIZONTAL

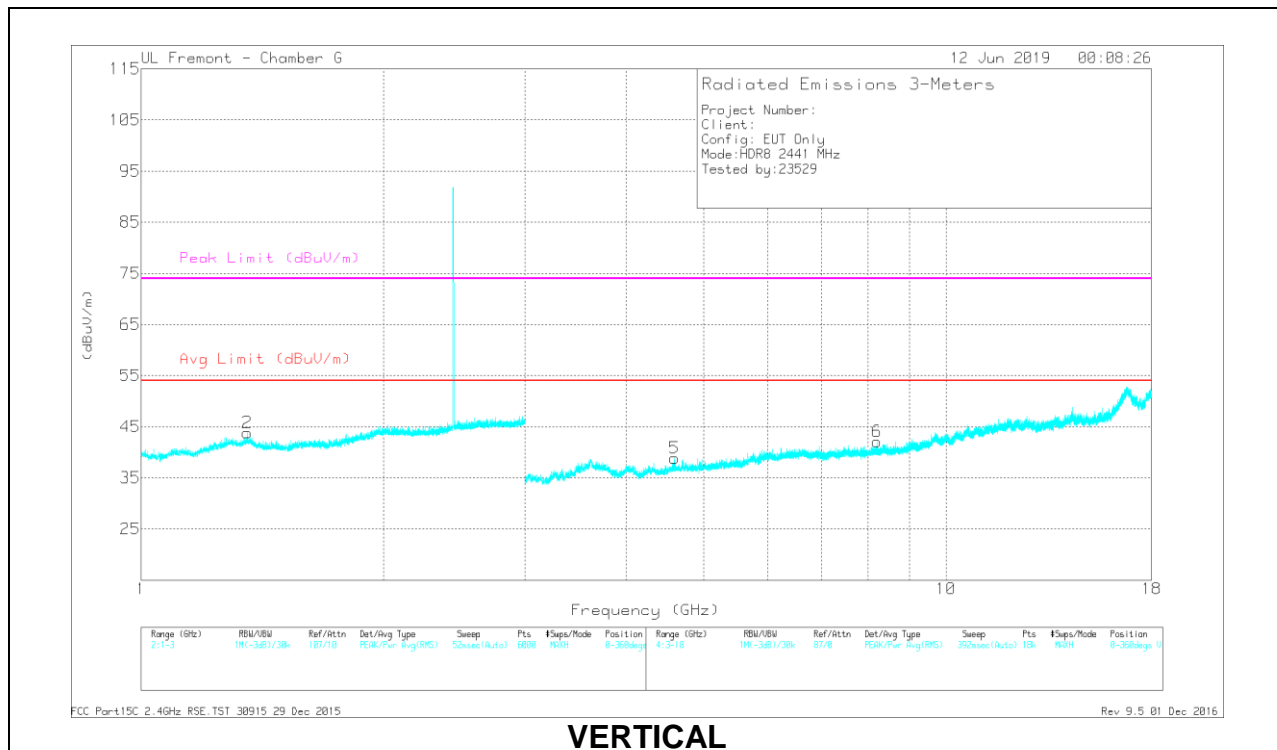

VERTICAL

RADIATED EMISSIONS


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.293	43.83	PK2	29.9	-23.5	50.23	-	-	74	-23.77	0	101	H
	* 1.295	32.05	MAv1	29.9	-23.5	38.45	54	-15.55	-	-	0	101	H
2	* 1.356	42.55	PK2	30	-23.3	49.25	-	-	74	-24.75	0	101	V
	* 1.355	30.92	MAv1	30	-23.3	37.62	54	-16.38	-	-	0	101	V
3	* 3.62	40.42	PK2	35.7	-30	46.12	-	-	74	-27.88	0	101	H
	* 3.621	28.99	MAv1	35.7	-30	34.69	54	-19.31	-	-	0	101	H
4	* 11.931	36.56	PK2	39.4	-22.4	53.56	-	-	74	-20.44	0	101	H
	* 11.933	25.4	MAv1	39.4	-22.3	42.5	54	-11.5	-	-	0	101	H
5	* 4.597	41.19	PK2	34.3	-29.5	45.99	-	-	74	-28.01	0	101	V
	* 4.599	29.35	MAv1	34.3	-29.6	34.05	54	-19.95	-	-	0	101	V
6	* 8.206	38.27	PK2	36.1	-26.5	47.87	-	-	74	-26.13	0	101	V
	* 8.204	27.27	MAv1	36.1	-26.5	36.87	54	-17.13	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

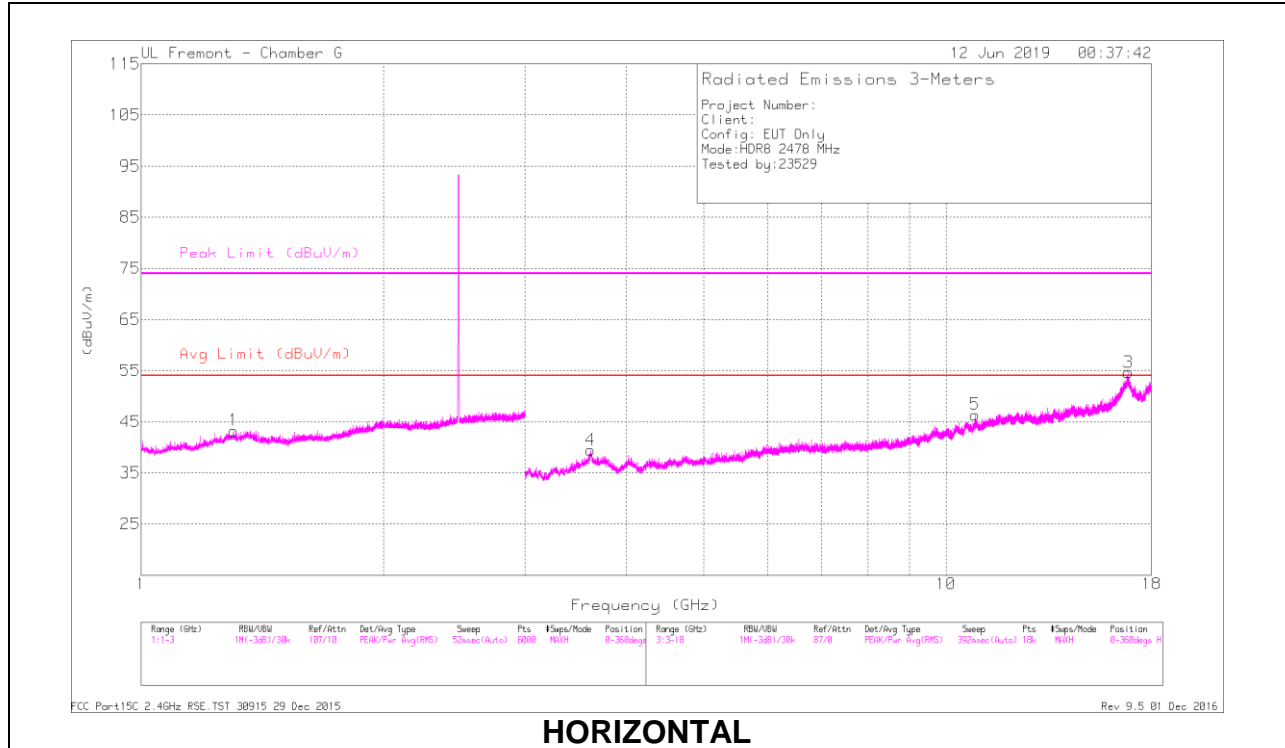

HORIZONTAL

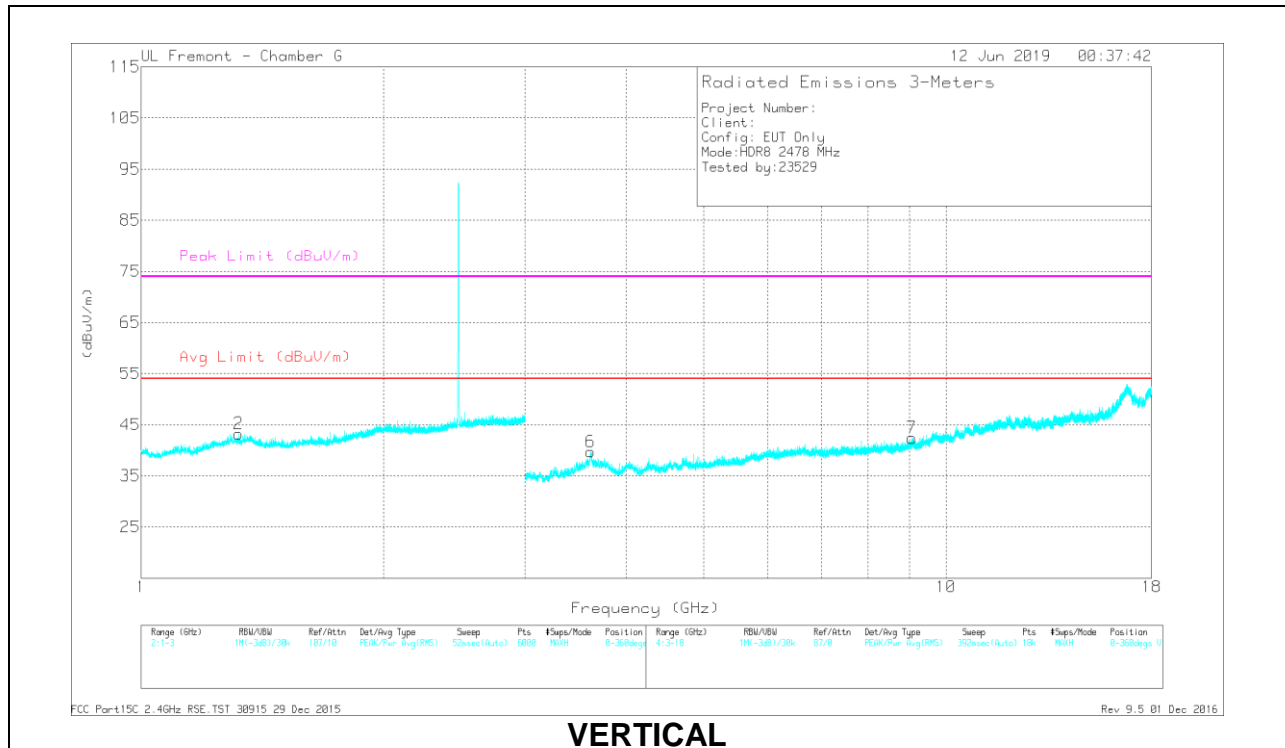

VERTICAL

RADIATED EMISSIONS


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.303	43.76	PK2	29.7	-23.5	49.96	-	-	74	-24.04	210	128	H
	* 1.303	32.4	MAv1	29.7	-23.5	38.6	54	-15.4	-	-	210	128	H
2	* 1.322	43.47	PK2	29.8	-23.5	49.77	-	-	74	-24.23	156	197	V
	* 1.322	32.27	MAv1	29.8	-23.5	38.57	54	-15.43	-	-	156	197	V
4	* 3.614	41.15	PK2	35.5	-30.2	46.45	-	-	74	-27.55	175	231	H
	* 3.615	29.86	MAv1	35.5	-30.2	35.16	54	-18.84	-	-	175	231	H
5	* 10.866	36.68	PK2	38.3	-23.4	51.58	-	-	74	-22.42	283	226	H
	* 10.866	25.9	MAv1	38.3	-23.4	40.8	54	-13.2	-	-	283	226	H
6	* 3.617	40.8	PK2	35.7	-30.1	46.4	-	-	74	-27.6	124	181	V
	* 3.617	29.92	MAv1	35.7	-30.1	35.52	54	-18.48	-	-	124	181	V
7	* 9.071	38.15	PK2	36.5	-25.2	49.45	-	-	74	-24.55	84	202	V
	* 9.07	26.63	MAv1	36.5	-25.2	37.93	54	-16.07	-	-	84	202	V
3	16.842	36.14	PK2	41.6	-17.6	60.14	-	-	-	-	264	189	H
	16.843	24.86	MAv1	41.7	-17.6	48.96	-	-	-	-	264	189	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

9.2.5. BEAMFORMING HIGH POWER HDR (HDR4)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

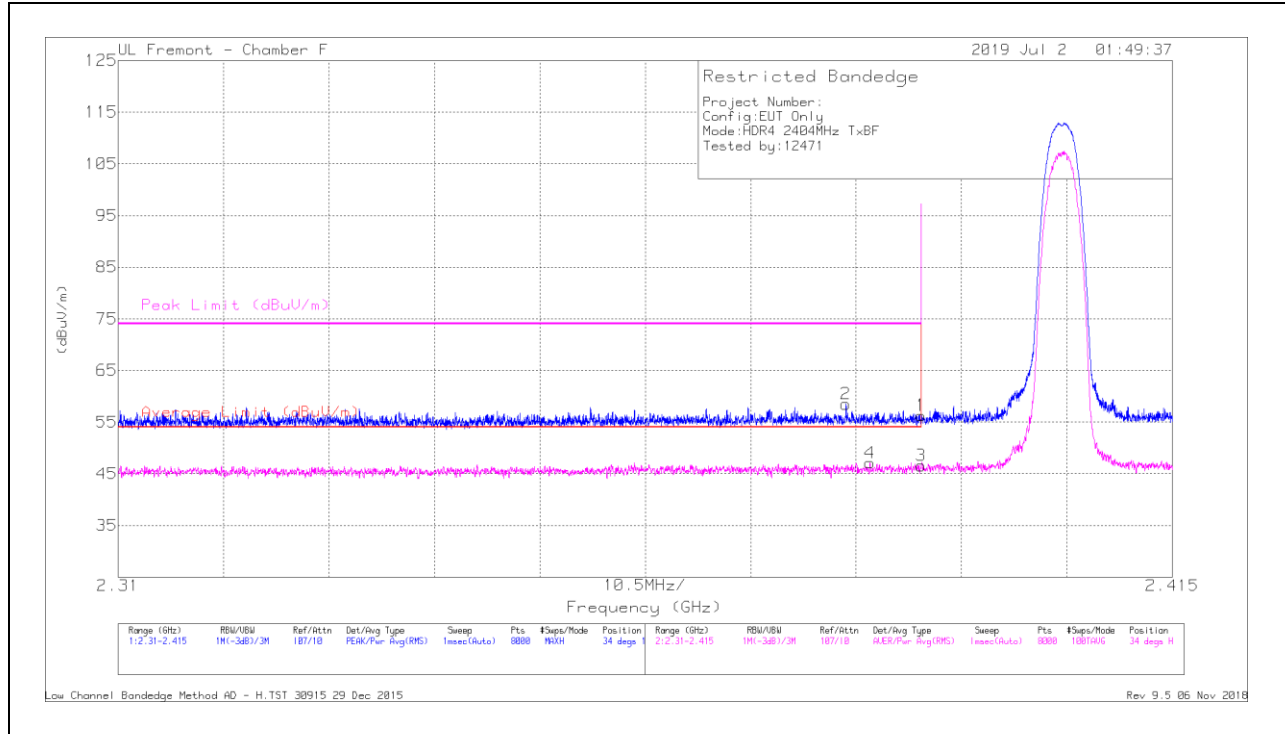

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.75	Pk	32	-14.5	56.25	-	-	74	-17.75	34	128	H
2	* 2.382	41.11	Pk	31.9	-14.5	58.51	-	-	74	-15.49	34	128	H
3	* 2.39	29.07	RMS	32	-14.5	46.57	54	-7.43	-	-	34	128	H
4	* 2.385	29.71	RMS	31.9	-14.5	47.11	54	-6.89	-	-	34	128	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT




Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.45	Pk	32	-14.5	55.95	-	-	74	-18.05	359	335	V
2	* 2.374	40.24	Pk	31.9	-14.4	57.74	-	-	74	-16.26	359	335	V
3	* 2.39	28.17	RMS	32	-14.5	45.67	54	-8.33	-	-	359	335	V
4	* 2.349	29.74	RMS	31.6	-14.4	46.94	54	-7.06	-	-	359	335	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

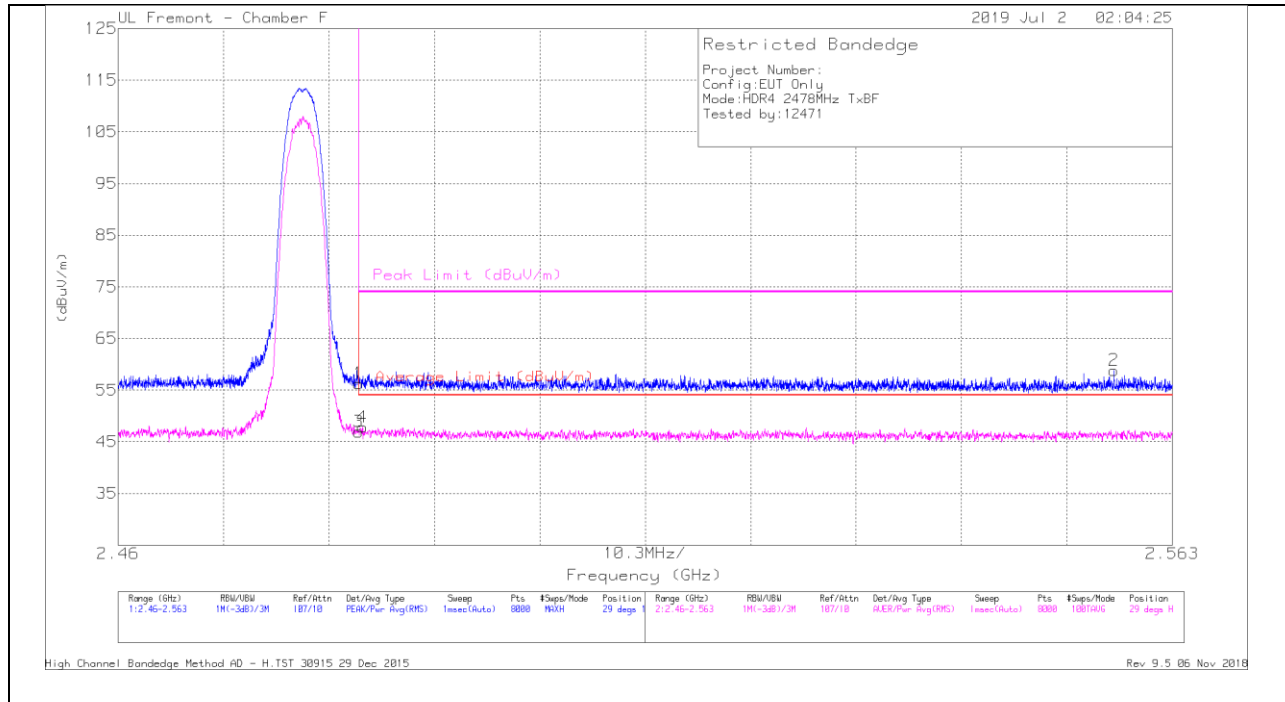

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.59	Pk	32.4	-14.7	56.29	-	-	74	-17.71	29	115	H
2	2.557	40.92	Pk	32.4	-14.5	58.82	-	-	74	-15.18	29	115	H
3	* 2.484	29.25	RMS	32.4	-14.7	46.95	54	-7.05	-	-	29	115	H
4	* 2.484	30.13	RMS	32.4	-14.7	47.83	54	-6.17	-	-	29	115	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

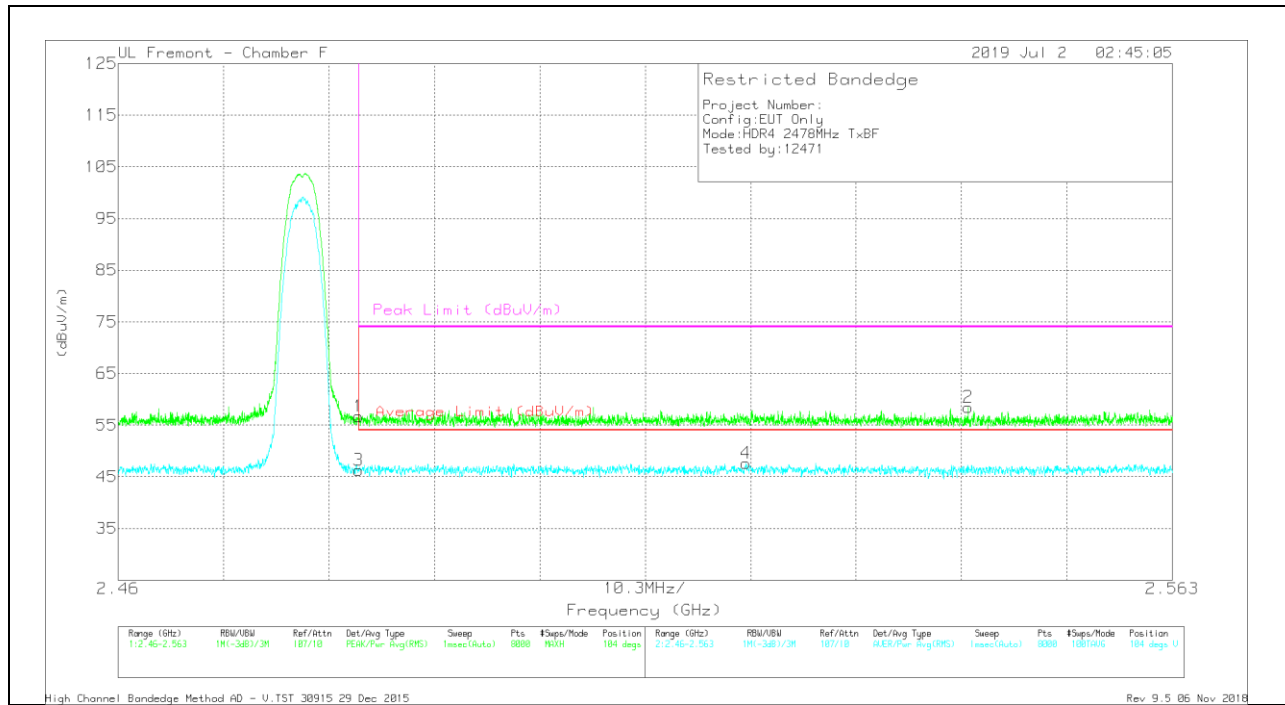

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.97	Pk	32.4	-14.7	56.67	-	-	74	-17.33	104	320	V
2	2.543	40.86	Pk	32.3	-14.7	58.46	-	-	74	-15.54	104	320	V
3	* 2.484	28.57	RMS	32.4	-14.7	46.27	54	-7.73	-	-	104	320	V
4	2.521	29.83	RMS	32.3	-14.5	47.63	54	-6.37	-	-	104	320	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

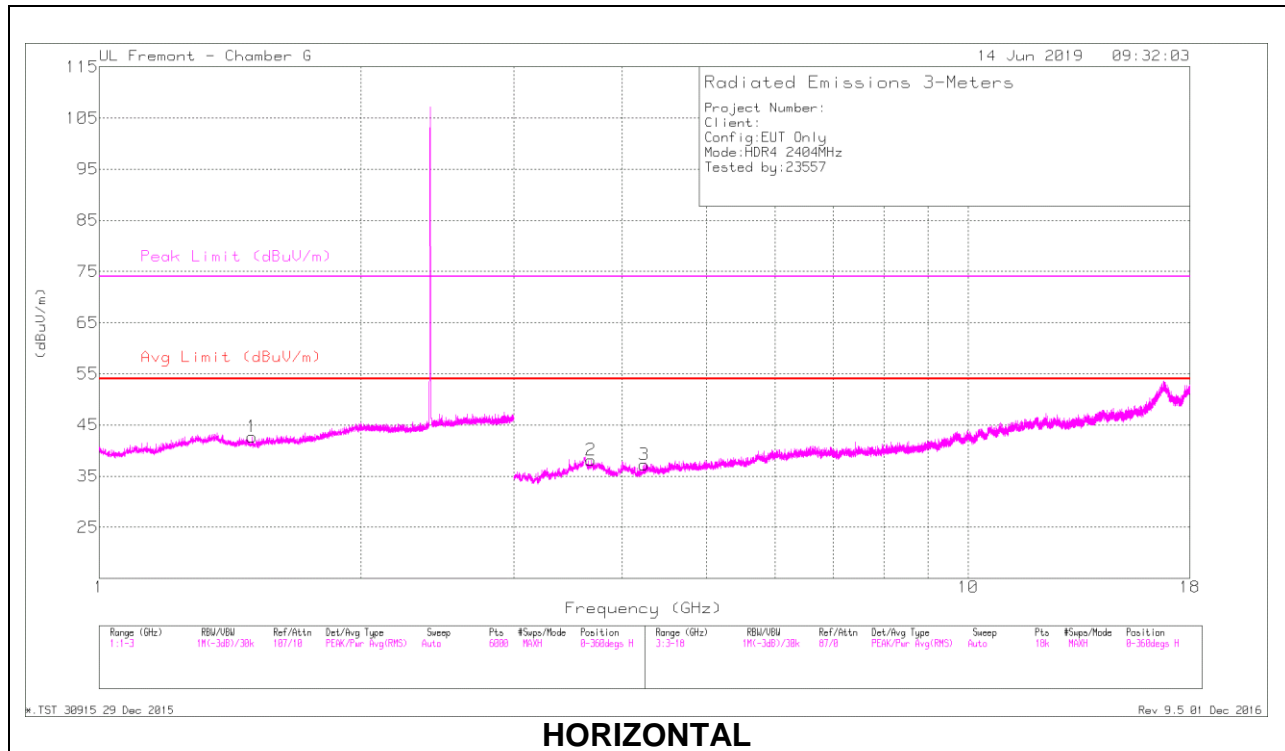

HORIZONTAL

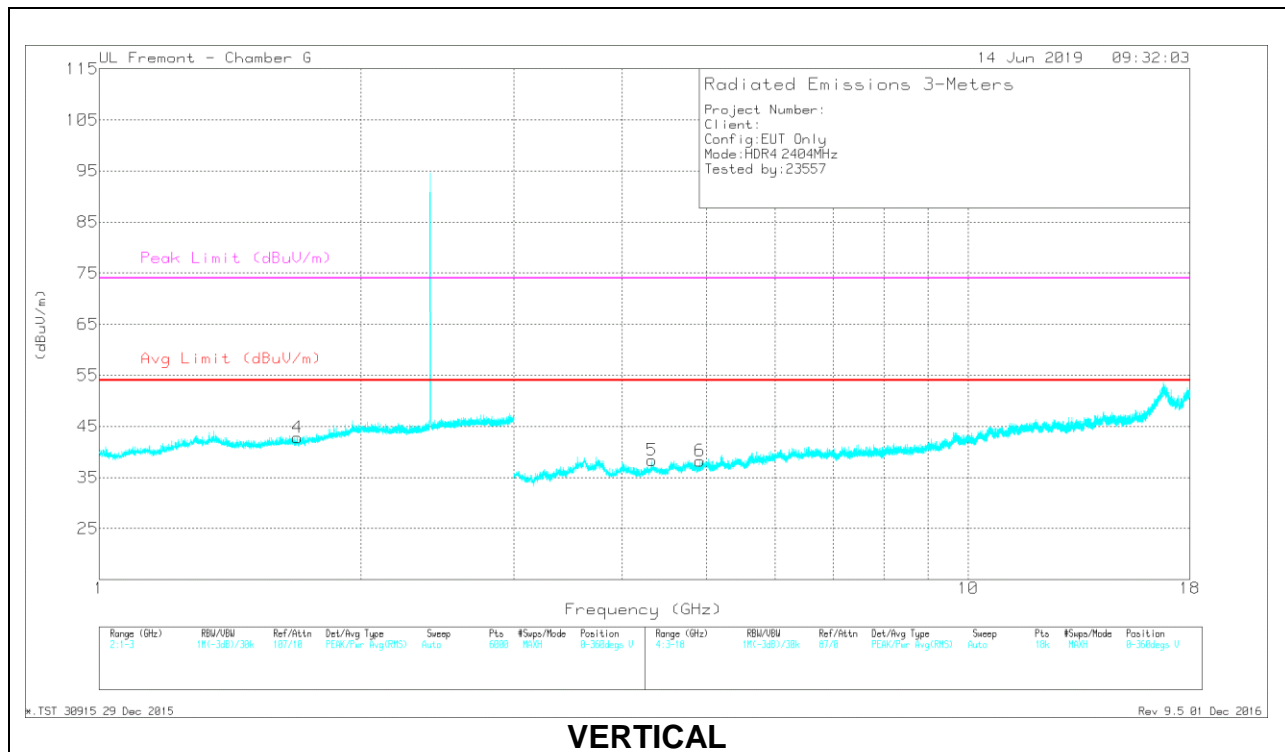

VERTICAL

RADIATED EMISSIONS


Markers	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb/Fitr/ Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
	* 1.499	44	PK2	28	-22.1	49.9	-	-	74	-24.1	347	385	H
1	* 1.499	31.44	MAv1	28	-22.1	37.34	54	-16.66	-	-	347	385	H
	* 1.69	43.52	PK2	28.3	-21.7	50.12	-	-	74	-23.88	173	260	V
4	* 1.69	31.39	MAv1	28.3	-21.7	37.99	54	-16.01	-	-	173	260	V
	* 3.68	39.41	PK2	34.2	-29	44.61	-	-	74	-29.39	4	113	H
2	* 3.682	27.73	MAv1	34.2	-28.9	33.03	54	-20.97	-	-	4	113	H
	* 4.236	40.44	PK2	33.6	-29.9	44.14	-	-	74	-29.86	235	397	H
3	* 4.237	28.91	MAv1	33.6	-29.9	32.61	54	-21.39	-	-	235	397	H
	* 4.328	40.54	PK2	33.8	-29	45.34	-	-	74	-28.66	56	326	V
5	* 4.327	28.24	MAv1	33.7	-29.1	32.84	54	-21.16	-	-	56	326	V
	* 4.911	40.21	PK2	34.3	-29.6	44.91	-	-	74	-29.09	192	255	V
6	* 4.913	28.56	MAv1	34.3	-29.5	33.36	54	-20.64	-	-	192	255	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

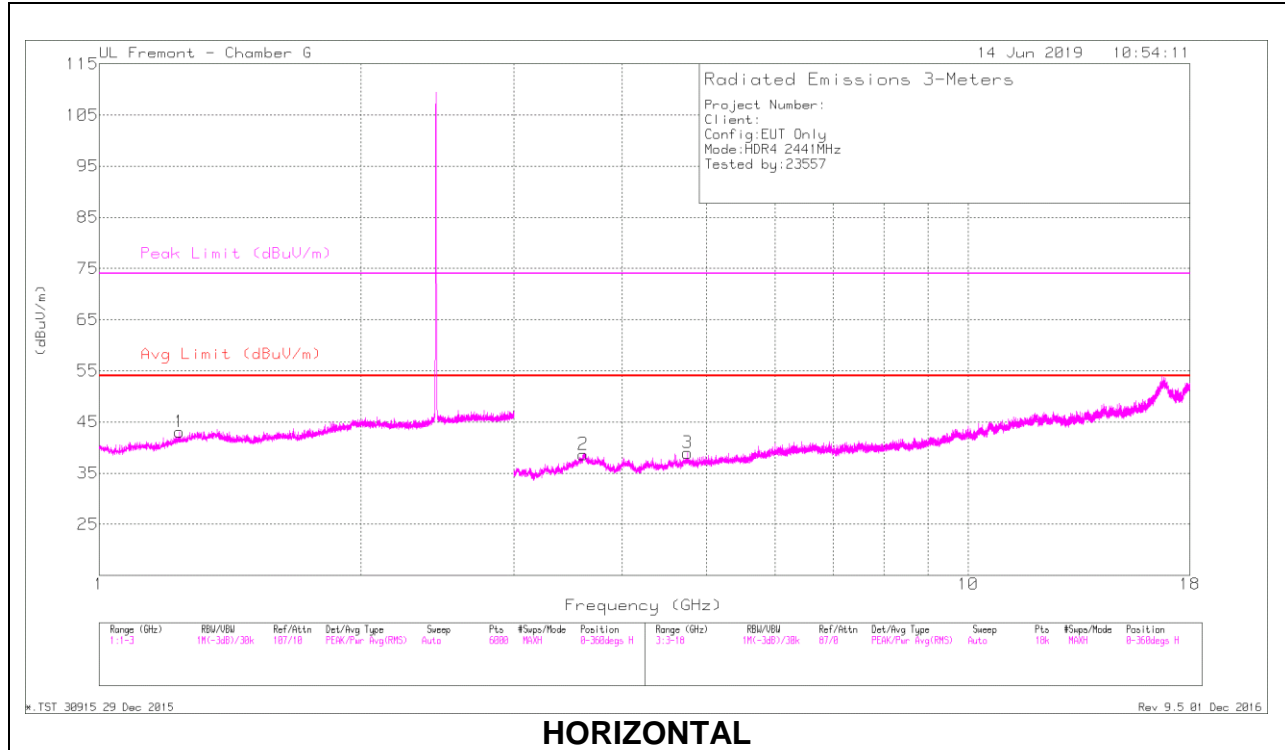

HORIZONTAL

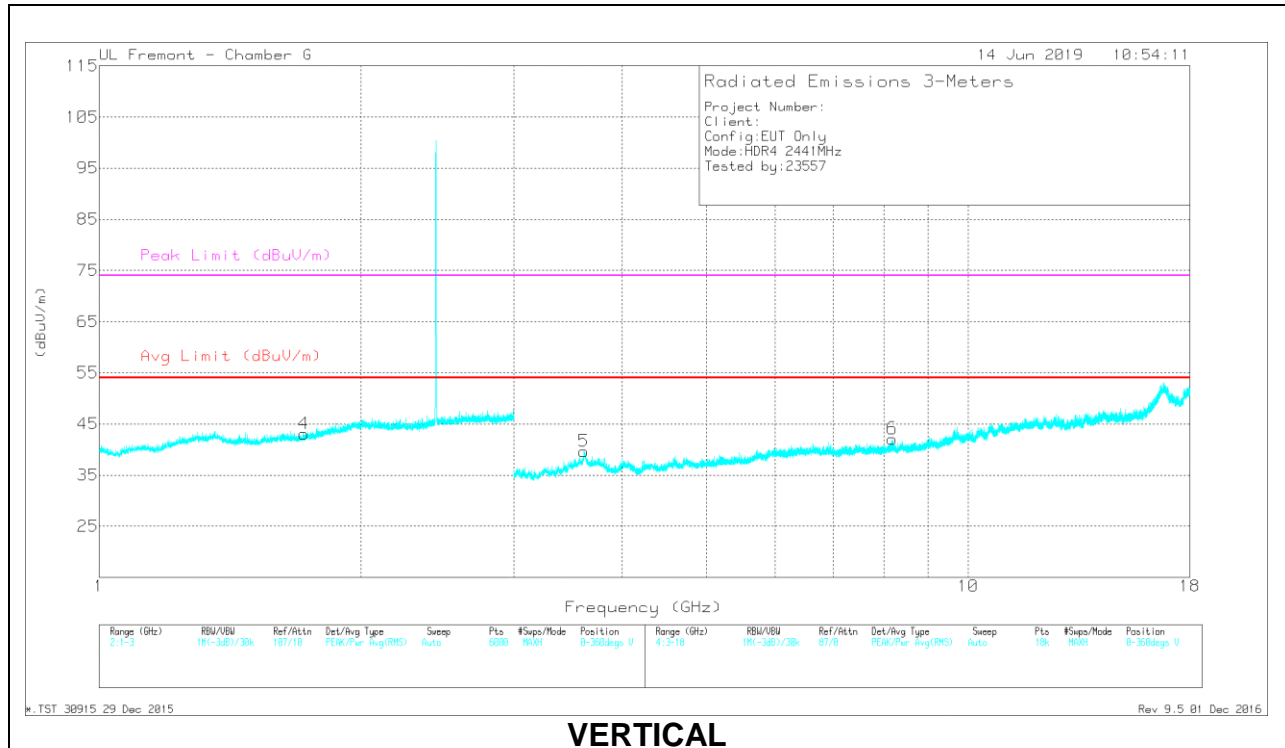

VERTICAL

RADIATED EMISSIONS


Markers	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
	* 1.239	44.89	PK2	29.2	-23.7	50.39	-	-	74	-23.61	325	399	H
1	* 1.24	32.05	MAv1	29.1	-23.7	37.45	54	-16.55	-	-	325	399	H
	* 1.721	43.77	PK2	29	-22	50.77	-	-	74	-23.23	202	151	V
4	* 1.721	31.63	MAv1	29	-22	38.63	54	-15.37	-	-	202	151	V
	* 3.604	40.77	PK2	35	-30.4	45.37	-	-	74	-28.63	156	183	H
2	* 3.607	29.17	MAv1	35.1	-30.4	33.87	54	-20.13	-	-	156	183	H
	* 4.76	40.24	PK2	34.3	-29.5	45.04	-	-	74	-28.96	32	113	H
3	* 4.759	28.35	MAv1	34.3	-29.5	33.15	54	-20.85	-	-	32	113	H
	* 3.614	41.17	PK2	35.5	-30.2	46.47	-	-	74	-27.53	335	147	V
5	* 3.615	29.25	MAv1	35.5	-30.2	34.55	54	-19.45	-	-	335	147	V
	* 8.186	38.07	PK2	36.1	-26.5	47.67	-	-	74	-26.33	222	156	V
6	* 8.185	26.73	MAv1	36.1	-26.5	36.33	54	-17.67	-	-	222	156	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

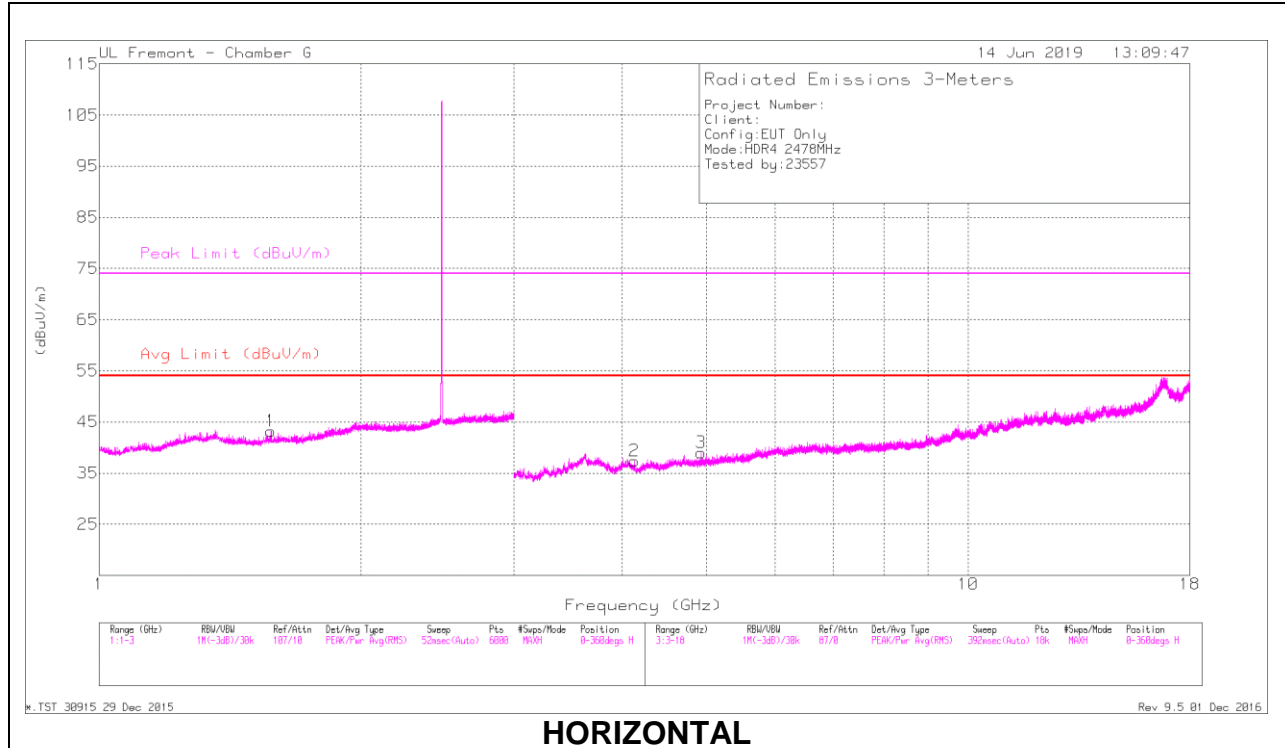

HORIZONTAL

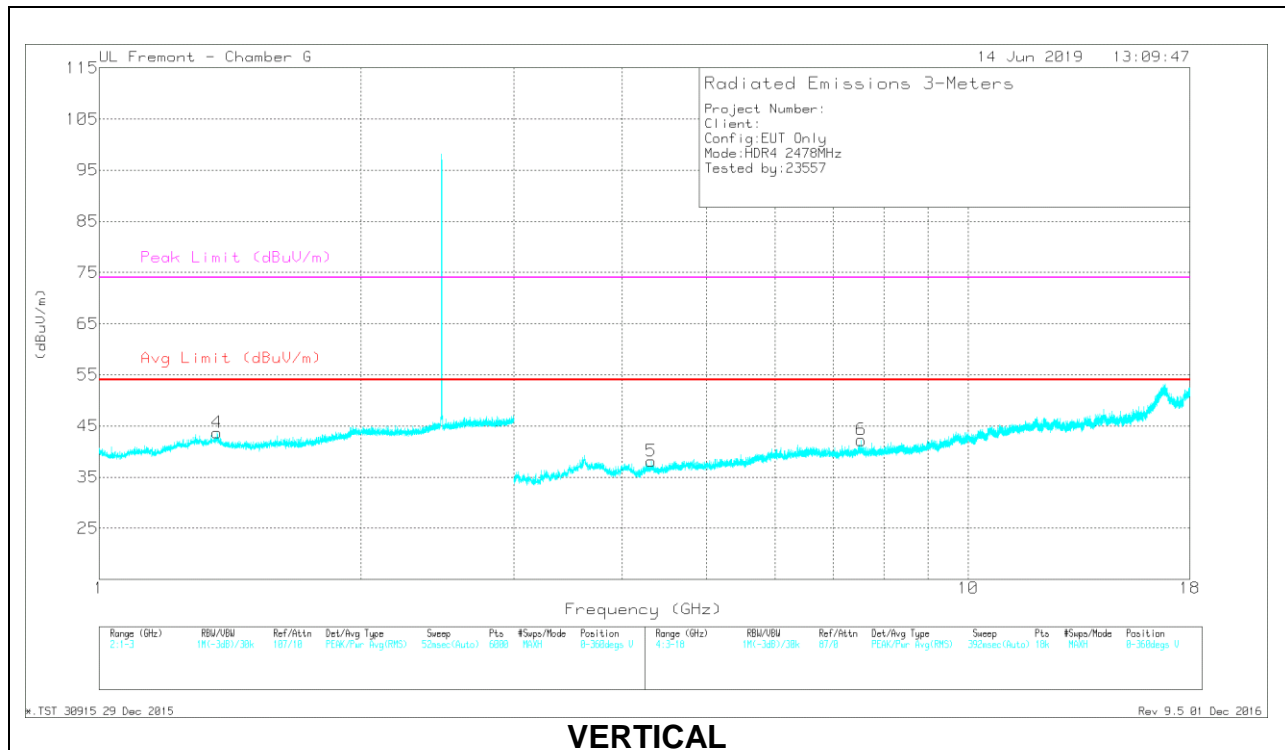

VERTICAL

RADIATED EMISSIONS

Markers	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
	* 1.577	43.04	PK2	27.9	-21.4	49.54	-	-	74	-24.46	127	175	H
1	* 1.576	31.33	MAv1	27.9	-21.4	37.83	54	-16.17	-	-	127	175	H
	* 1.367	43.73	PK2	30	-23.2	50.53	-	-	74	-23.47	282	304	V
4	* 1.368	31.46	MAv1	30	-23.2	38.26	54	-15.74	-	-	282	304	V
	* 4.129	40.93	PK2	33.6	-30.3	44.23	-	-	74	-29.77	322	249	H
2	* 4.13	29.19	MAv1	33.6	-30.3	32.49	54	-21.51	-	-	322	249	H
	* 4.926	40.48	PK2	34.2	-29.6	45.08	-	-	74	-28.92	241	277	H
3	* 4.926	28.58	MAv1	34.2	-29.6	33.18	54	-20.82	-	-	241	277	H
	* 4.321	40.55	PK2	33.7	-29.1	45.15	-	-	74	-28.85	163	276	V
5	* 4.322	28.88	MAv1	33.7	-29.1	33.48	54	-20.52	-	-	163	276	V
	* 7.535	39.04	PK2	36	-27	48.04	-	-	74	-25.96	340	378	V
6	* 7.535	27.06	MAv1	36	-27	36.06	54	-17.94	-	-	340	378	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

9.2.6. BEAMFORMING HIGH POWER HDR (HDR8)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

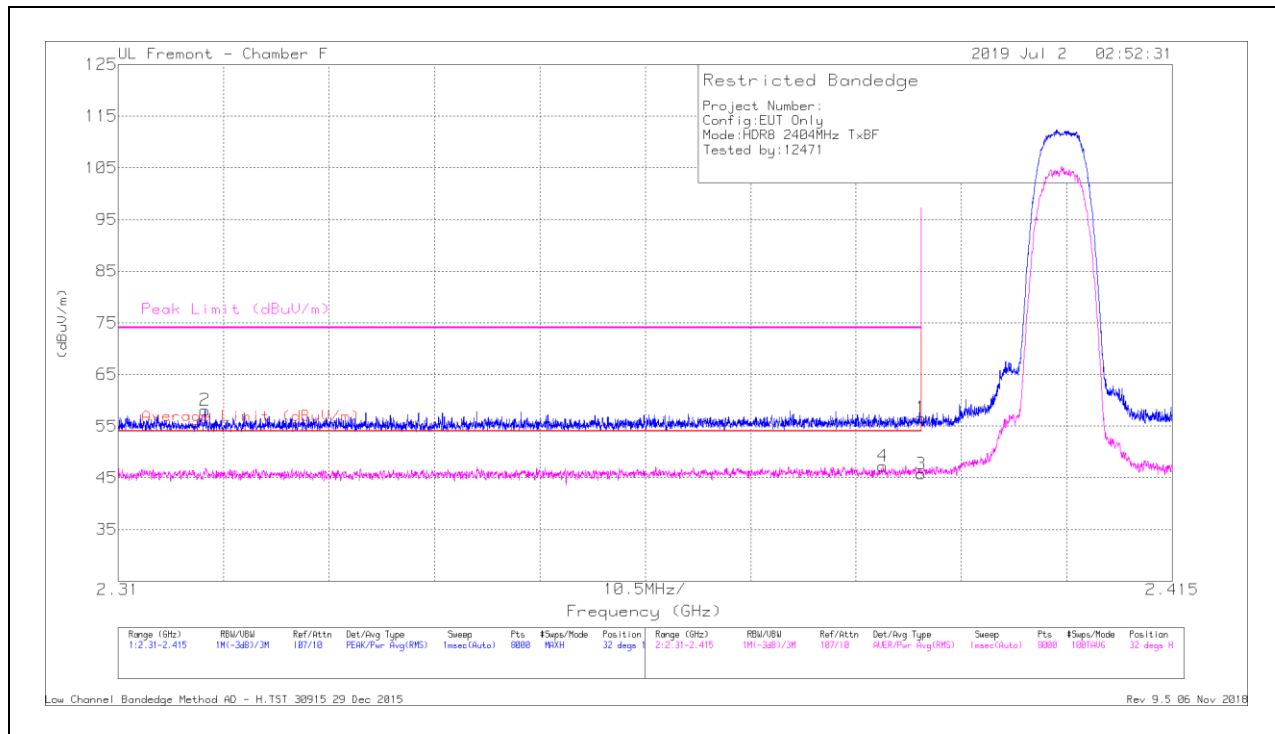

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.13	Pk	32	-14.5	56.63	-	-	74	-17.37	32	150	H
2	* 2.319	41	Pk	31.7	-14.6	58.1	-	-	74	-15.9	32	150	H
3	* 2.39	28.27	RMS	32	-14.5	45.77	54	-8.23	-	-	32	150	H
4	* 2.386	29.88	RMS	31.9	-14.5	47.28	54	-6.72	-	-	32	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

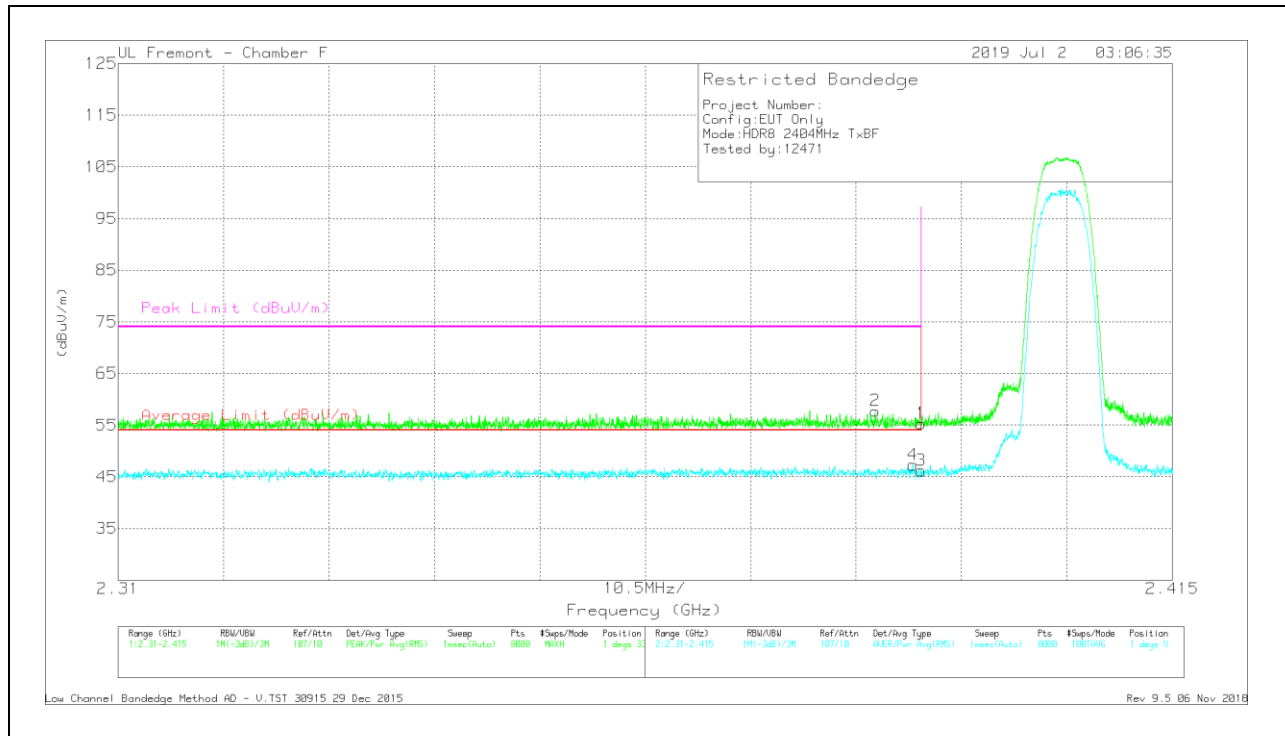


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.81	Pk	32	-14.5	55.31	-	-	74	-18.69	1	337	V
2	* 2.385	40.35	Pk	31.9	-14.5	57.75	-	-	74	-16.25	1	337	V
3	* 2.39	28.72	RMS	32	-14.5	46.22	54	-7.78	-	-	1	337	V
4	* 2.389	29.81	RMS	32	-14.5	47.31	54	-6.69	-	-	1	337	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

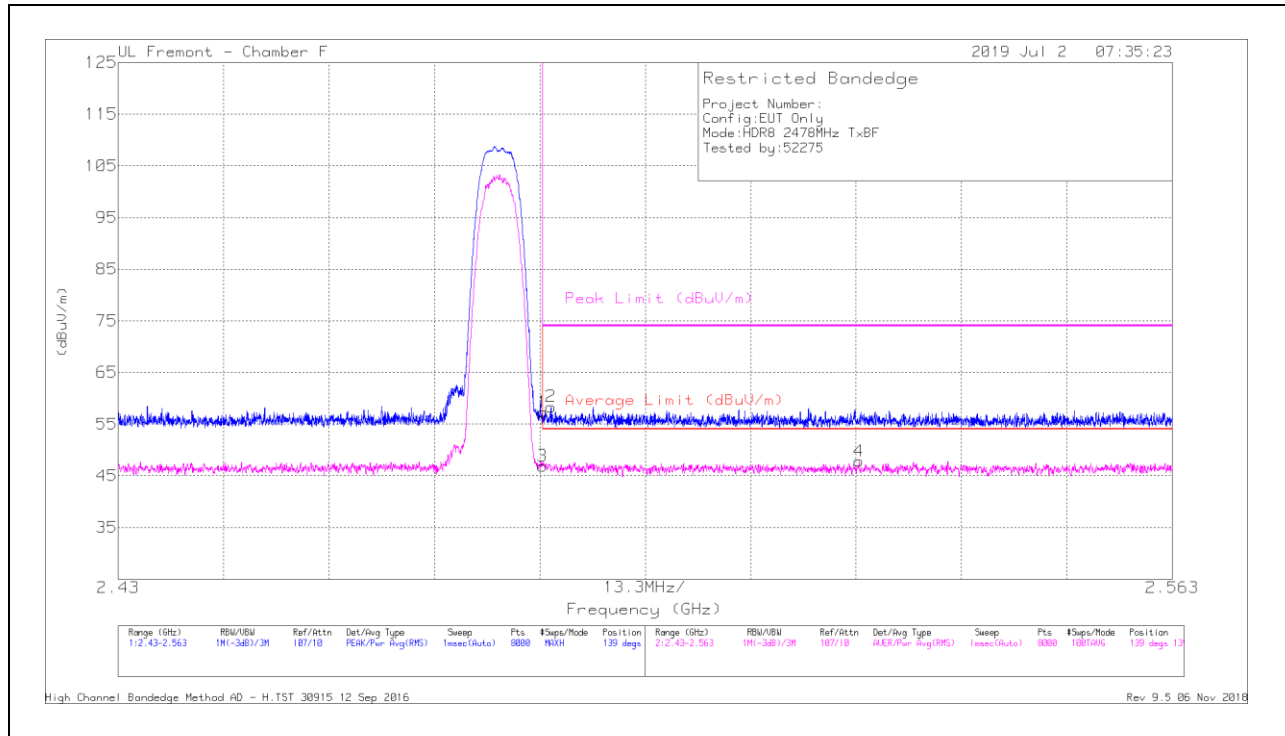

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.63	Pk	32.4	-14.7	57.33	-	-	74	-16.67	139	139	H
2	* 2.485	40.56	Pk	32.4	-14.6	58.36	-	-	74	-15.64	139	139	H
3	* 2.484	29.17	RMS	32.4	-14.7	46.87	54	-7.13	-	-	139	139	H
4	2.523	30.03	RMS	32.3	-14.5	47.83	54	-6.17	-	-	139	139	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

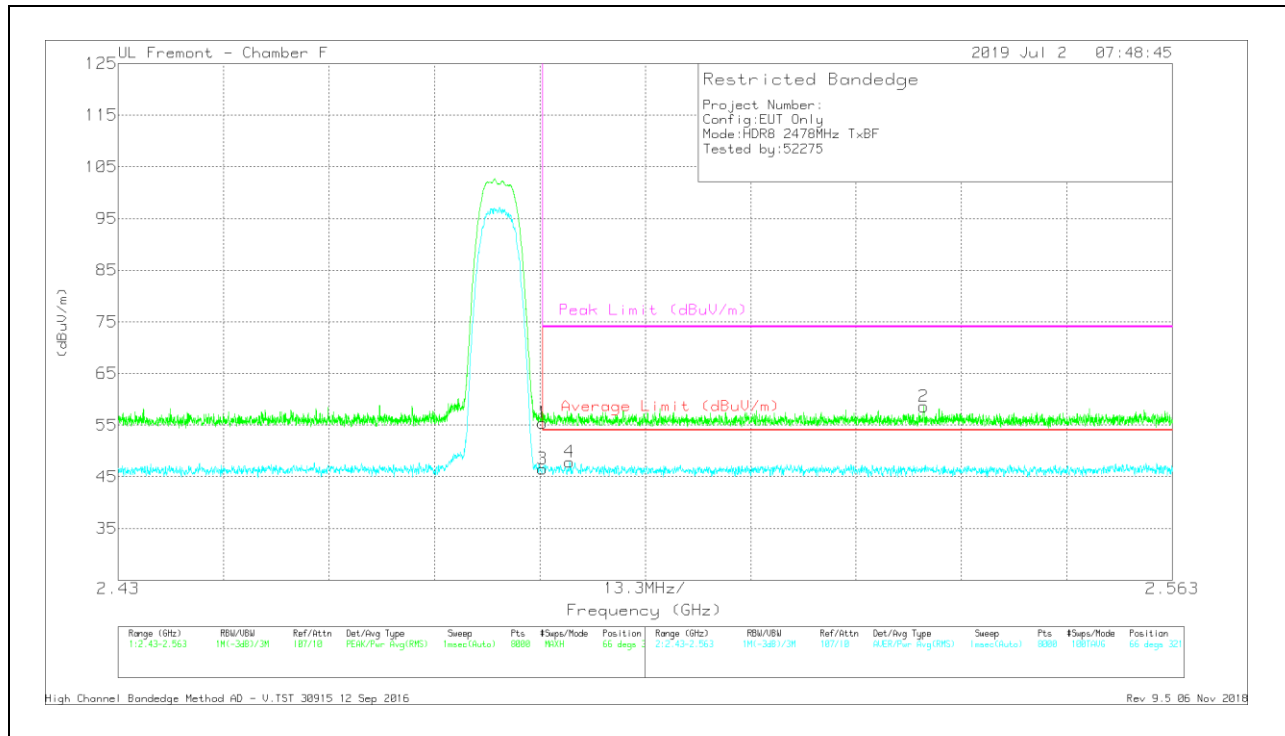


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.75	Pk	32.4	-14.7	55.45	-	-	74	-18.55	66	321	V
2	2.532	40.93	Pk	32.4	-14.7	58.63	-	-	74	-15.37	66	321	V
3	* 2.484	28.83	RMS	32.4	-14.7	46.53	54	-7.47	-	-	66	321	V
4	* 2.487	30.19	RMS	32.3	-14.6	47.89	54	-6.11	-	-	66	321	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

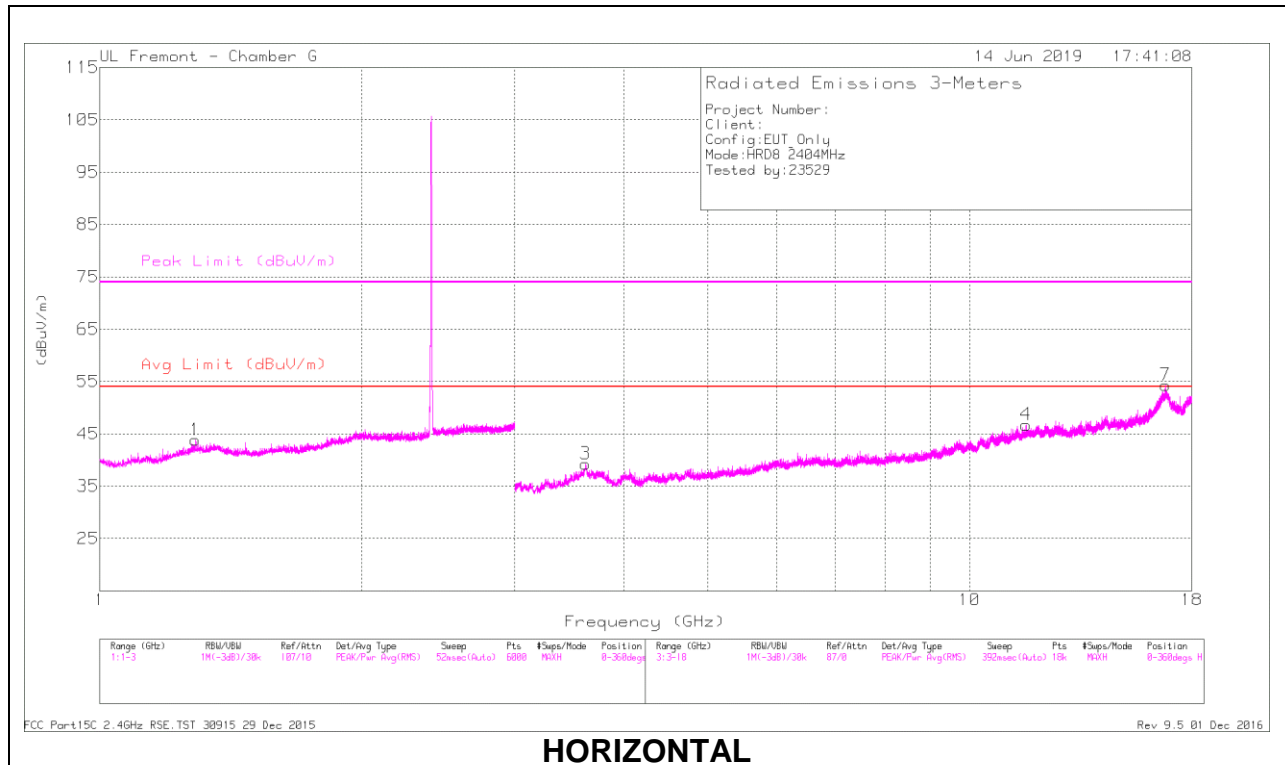

HORIZONTAL

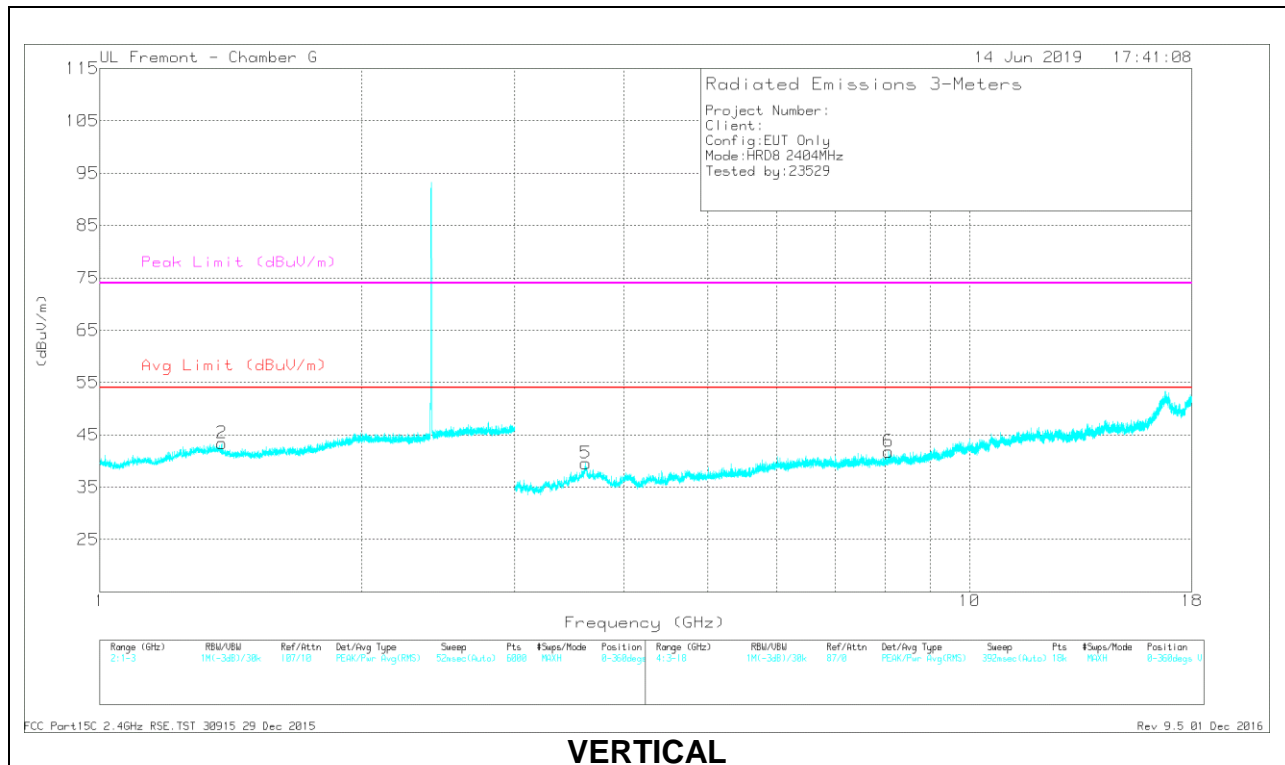

VERTICAL