



CERTIFICATION TEST REPORT

Report Number. : 12607353-E9V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2215

FCC ID : BCG-E3307A

EUT Description : SMARTPHONE

Test Standard(s) : FCC CFR47 PART 22 H, PART 27

Date Of Issue:
AUGUST 14, 2019

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

Revision History



Rev.	Issue Date	Revisions	Revised By
V1	8/9/2019	Initial Review	Mengistu Mekuria
V2	8/14/2019	Address TCB Questions	Lieu Nguyen

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER	8
5.3. SOFTWARE AND FIRMWARE	11
5.4. MAXIMUM ANTENNA GAIN	11
5.5. WORST-CASE CONFIGURATION AND MODE	11
5.6. DESCRIPTION OF TEST SETUP	12
6. TEST AND MEASUREMENT EQUIPMENT	14
7. RF OUTPUT POWER VERIFICATION	15
7.1. LTE BAND 5	16
7.2. LTE BAND 7	18
7.3. LTE BAND 41	22
8. CONDUCTED TEST RESULTS	26
8.1. OCCUPIED BANDWIDTH	26
8.1.1. LTE BAND 5	29
8.1.2. LTE BAND 7	32
8.1.3. LTE BAND 41	35
8.2. BAND EDGE AND EMISSION MASK	39
8.2.1. LTE BAND 5	40
8.2.2. LTE BAND 7	44
8.2.3. LTE BAND 41	48
8.3. OUT OF BAND EMISSIONS	52
8.3.2. LTE BAND 7	55

8.3.3.	LTE BAND 41.....	57
8.4.	FREQUENCY STABILITY	59
8.4.1.	LTE BAND 5.....	60
8.4.2.	LTE BAND 7.....	61
8.4.3.	LTE BAND 41.....	63
8.5.	PEAK-TO-AVERAGE POWER RATIO	64
8.5.1.	LTE BAND 5.....	64
8.5.2.	LTE BAND 7.....	64
8.5.3.	LTE BAND 41.....	65
9.	RADIATED TEST RESULTS	66
9.1.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 1	66
9.1.1.	LTE BAND 5.....	67
9.1.2.	LTE BAND 7.....	69
9.1.3.	LTE BAND 41.....	71
9.2.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 2	73
9.2.1.	LTE BAND 5.....	73
9.2.2.	LTE BAND 7.....	75
9.2.3.	LTE BAND 41.....	77
9.3.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 3	79
9.3.1.	LTE BAND 7.....	79
9.3.2.	LTE BAND 41.....	81
9.4.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 4	83
9.4.1.	LTE BAND 7.....	83
9.4.2.	LTE BAND 41.....	85
10.	SETUP PHOTOS.....	87

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE INC. 1 APPLE PARK WAY CUPERTINO, CA. 95014, U.S.A.
Model	A2215
FCC ID	BCG-E3307A
EUT Description	SMARTPHONE
Serial Number	C39YV06LN2RW, C39YT01DN2RK
Date Tested	MARCH 29, 2019 to AUGUST 05, 2019
Applicable Standards	FCC CFR47 PART 22H, PART 27
Test Results	COMPLIES
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.	
Approved & Released By:	Prepared By:
	
Mengistu Mekuria Project Engineer UL Verification Services Inc.	Lieu Nguyen Test Engineer UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, FCC CFR 47 Part 2, FCC KDB 971168 D01 v03r01/ D02 v02r01, KDB 412172 D01 Determining ERP and EIRP v01r01, Part 22H, Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
☒ Chamber A (ISED:2324B-1)	☐ Chamber D (ISED:22541-1)	☐ Chamber I (ISED: 2324A-5)
☒ Chamber B (ISED:2324B-2)	☐ Chamber E (ISED:22541-2)	☐ Chamber J (ISED: 2324A-6)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)	☐ Chamber K (ISED: 2324A-1)
	☐ Chamber G (ISED:22541-4)	☐ Chamber L (ISED: 2324A-3)
	☐ Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.
 $36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Radiated Disturbance, 26000 to 40000 MHz	5.17 dB
Occupied Channel Bandwidth	±0.39 %
Temperature	±0.9 °C
Supply voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wide band, GPS and NFC. All models support at least one UICC based SIM. The second SIM, if present, is either UICC based pSIM (physical SIM) or e-SIM (electronic SIM). The device has a built-in inductive charging receiver. The rechargeable battery is also not user accessible.

5.2. MAXIMUM OUTPUT POWER

EIRP LIMIT

FCC: §2.1046, §22.913, §27.50

EIRP TEST PROCEDURE

ANSI C63.26:2015
KDB 971168 D01 Section 5.6

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted and ERP/EIRP output powers as follows:

OUTPUT POWER FOR LTE BAND 5

Part 22H								
ERP Limit (W)		7.00						
Antenna Gain (dBi)		-5.00						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator
3+5	QPSK	825.5	846.5	24.8	17.61	0.058	7572.0	7M57G7W
	16QAM			24.4	17.22	0.053	7623.1	7M62D7W
	64QAM			22.7	15.52	0.036	7644.1	7M64D7W
5+3	QPSK	826.5	847.5	24.8	17.69	0.059	7552.8	7M55G7W
	16QAM			24.1	16.96	0.050	7535.6	7M54D7W
	64QAM			23.3	16.15	0.041	7532.2	7M53D7W
5+10	QPSK	826.5	844.0	24.9	17.75	0.060	13944.0	13M9G7W
	16QAM			24.0	16.87	0.049	13881.0	13M9D7W
	64QAM			22.0	14.85	0.031	13866.0	13M9D7W
10+5	QPSK	829.0	846.5	25.0	17.85	0.061	13899.0	13M9G7W
	16QAM			24.1	16.95	0.050	13891.0	13M9D7W
	64QAM			21.9	14.71	0.030	13882.0	13M9D7W
10+10	QPSK	829.0	844.0	24.9	17.75	0.060	18779.0	18M8G7W
	16QAM			24.1	16.90	0.049	18796.0	18M8D7W
	64QAM			22.0	14.83	0.030	18798.0	18M8D7W

OUTPUT POWER FOR LTE BAND 7

Part 27 / RSS 199								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		-2.70						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
10+20	QPSK	2505.5	2560.0	25.0	22.30	0.170	28065	28M1G7W
	16QAM			24.0	21.30	0.135	28012	28M0D7W
	64QAM			22.1	19.44	0.088	28043	28M0D7W
20+10	QPSK	2510.0	2564.5	24.8	22.14	0.164	28028	28M0G7W
	16QAM			23.8	21.13	0.130	28025	28M0D7W
	64QAM			22.0	19.26	0.084	28043	28M0D7W
15+15	QPSK	2507.5	2562.5	24.8	22.12	0.163	28619	28M6G7W
	16QAM			24.0	21.25	0.133	28579	28M6D7W
	64QAM			21.9	19.19	0.083	28568	28M6D7W
15+20	QPSK	2507.8	2560.0	24.8	22.15	0.164	32970	33M0G7W
	16QAM			24.1	21.39	0.138	32868	32M9D7W
	64QAM			22.0	19.35	0.086	32879	32M9D7W
20+15	QPSK	2510.0	2562.2	24.9	22.16	0.165	32942	32M9G7W
	16QAM			23.9	21.22	0.132	32845	32M8D7W
	64QAM			22.0	19.33	0.086	32884	32M9D7W
20+20	QPSK	2510.0	2560.0	24.9	22.19	0.166	37772	37M8G7W
	16QAM			24.1	21.40	0.138	37704	37M7D7W
	64QAM			22.1	19.40	0.087	37669	37M7D7W

OUTPUT POWER FOR LTE BAND 41

Part 27								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		-2.70						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
5+20	QPSK	2499.3	2680.0	27.0	24.30	0.269	23199	23M2G7W
	16QAM			25.9	23.23	0.210	23227	23M2D7W
	64QAM			24.1	21.38	0.138	23178	23M2D7W
20+5	QPSK	2506.0	2686.7	26.7	24.01	0.252	23286	23M3G7W
	16QAM			25.8	23.14	0.206	23295	23M3D7W
	64QAM			24.3	21.56	0.143	23287	23M3D7W
10+20	QPSK	2501.5	2680.0	26.8	24.13	0.259	28033	28M0G7W
	16QAM			25.7	23.05	0.202	28090	28M1D7W
	64QAM			24.1	21.43	0.139	27949	27M9D7W
20+10	QPSK	2506.0	2684.5	26.8	24.05	0.254	27961	28M0G7W
	16QAM			25.7	23.01	0.200	27938	27M9D7W
	64QAM			24.1	21.36	0.137	27952	28M0D7W
15+15	QPSK	2503.5	2682.5	26.7	23.96	0.249	28511	28M5G7W
	16QAM			25.6	22.91	0.195	28571	28M6D7W
	64QAM			23.9	21.21	0.132	28499	28M5D7W
15+20	QPSK	2503.8	2680.0	26.7	23.97	0.249	32755	32M8G7W
	16QAM			25.6	22.92	0.196	32709	32M7D7W
	64QAM			24.2	21.49	0.141	32682	32M7D7W
20+15	QPSK	2506.0	2682.2	26.9	24.21	0.263	32839	32M8G7W
	16QAM			25.9	23.15	0.207	32835	32M8D7W
	64QAM			24.3	21.59	0.144	32816	32M8D7W
20+20	QPSK	2506.0	2680.0	26.7	24.03	0.253	37589	37M6G7W
	16QAM			25.8	23.12	0.205	37567	37M6D7W
	64QAM			24.4	21.69	0.148	37589	37M6D7W

5.3. SOFTWARE AND FIRMWARE

The EUT Firmware installed during testing was version: 19-01.1919.01_27-0.22.00-27.

5.4. MAXIMUM ANTENNA GAIN

Please see table below:

LTE Bands	Ant 1 Gain (dBi)	Ant 2 Gain (dBi)	Ant 3 Gain (dBi)	Ant 4 Gain (dBi)
LTE Band 5, 824 – 849 MHz	-5.0	-5.1	N/A	N/A
LTE Band 7, 2500 – 2570 MHz	-2.7	-4.6	-8.4	-2.0
LTE Band 41, 2496 – 2690 MHz	-2.7	-3.9	-7.5	-1.9

5.5. WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE dual carrier Bands of: Band 5, 7, and Band 41.

The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM and 64QAM modulations. It was found that QPSK and 16QAM results were worst case. All testing was performed using QPSK and 16QAM modulations to represent the worst case. Tests were performed on the conducted test at ANT 1 antenna as worst case since it has higher output powers.

The EUT was investigated in three orthogonal orientations X/Y/Z on antennas 1, 2, 3, and 4. For ANT 1 antenna, it was determined that Y (Landscape) orientation was worst-case orientation for band 5; Z (Portrait) orientation was worst-case orientation for bands 7 and 41 without AC/DC adapter.

For ANT 2 antenna, it was determined that Y (Landscape) orientation was worst-case orientation for band 5; X (Flatbed) orientation was worst-case orientation for bands 7 and 41 without AC/DC adapter

For ANT 3 antenna, it was determined that X (Flatbed) orientation was worst-case for bands 7 and 41 without AC/DC adapter.

For ANT 4 antenna, it was determined that Z (Portrait) orientation was worst-case orientation for bands 7 and 41 without AC/DC adapter

For Band Edge and Emission Mask: The highest BW combo and sample lower BW combinations were tested. Combination pairs of the same BW are considered generally equivalent. The RB combinations were selected such that the signal is active closest to the band limit, as this is the worst case.

For Out of Band Emissions: The highest combination and a sample lower combination was tested. The highest power RB combination was selected as worst case.

Radiated spurious emissions were investigated below 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found on below 30MHz and 30MHz-1GHz.

For simultaneous transmission of multiple channels in the 2.4/5 GHz and Cellular bands, no noticeable emission was found

For interband transmission of multiple channels in Ant 1 and Ant 3 in Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
Laptop AC/DC adapter	Apple	85W MagSafe 2	C0651730MMM6P4AL
Laptop	Apple	Macbook Pro	C02PM012G3QD
Laptop	Apple	Macbook Pro	C02P52HGG085


I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0m	N/A
2	USB	1	DC	Un-shielded	1.0m	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6m	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2m	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5.0m	N/A

CONDUCTED SETUP

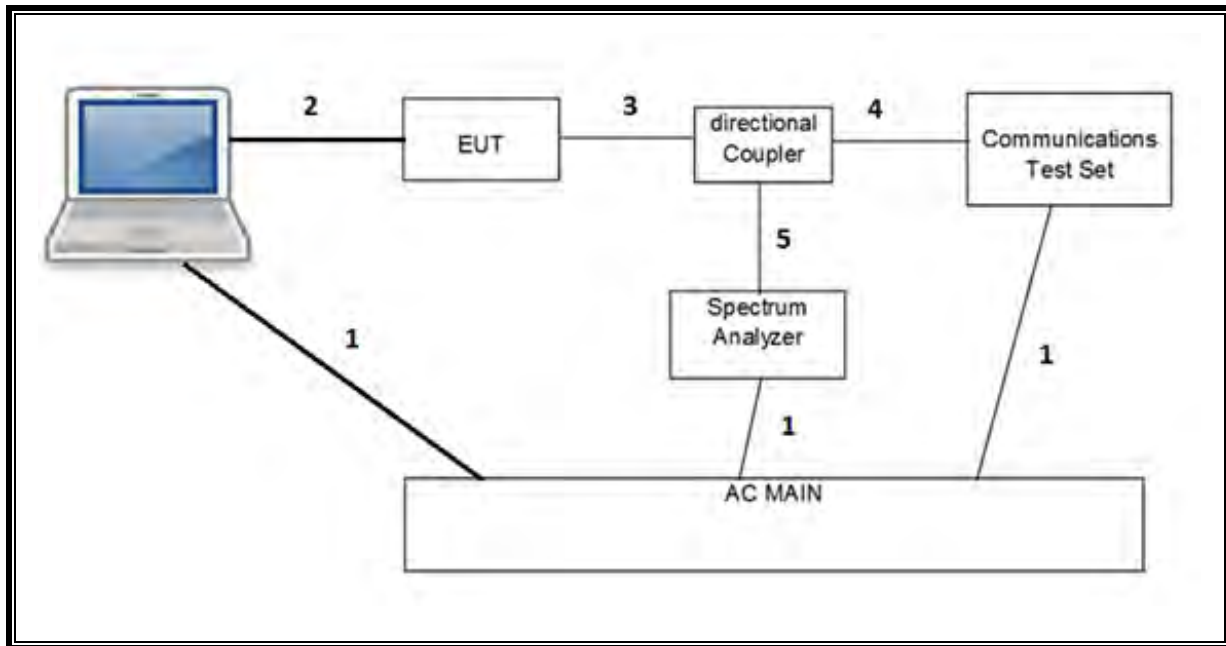

RADIATED SETUP

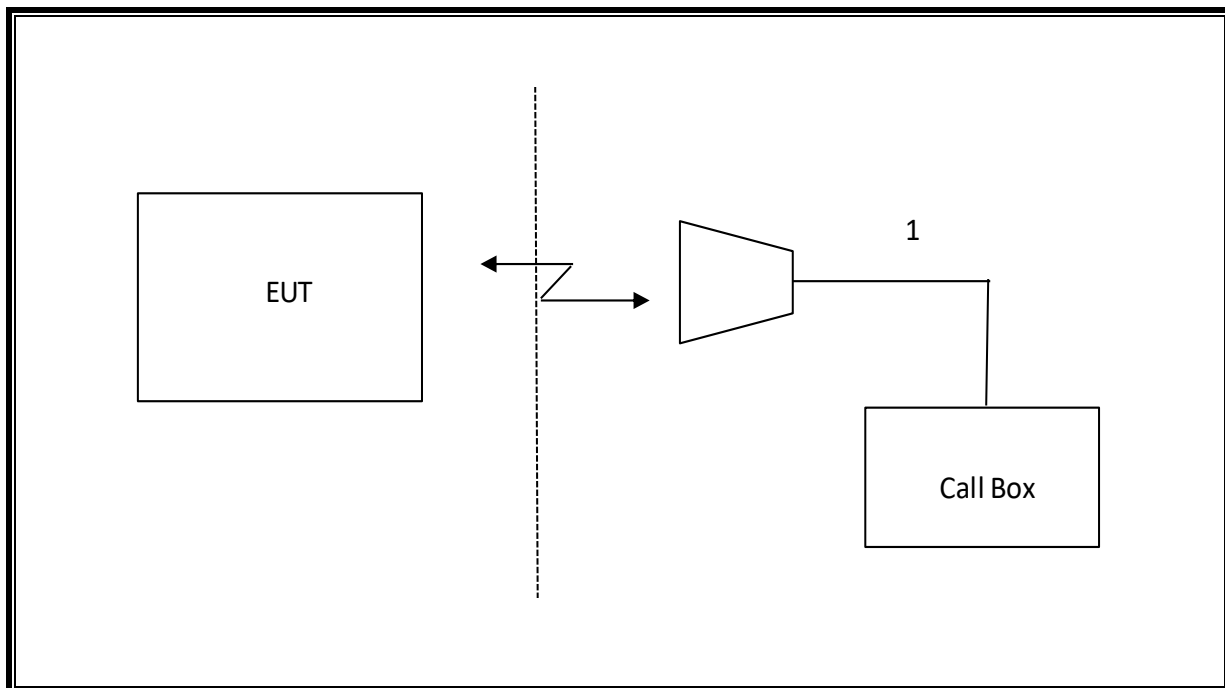

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T15	08/15/2019
Amplifier, 18-26GHz	Agilent	8449B	T404	3/23/2020
Amplifier, 26-40GHz	Miteq	TTA2640	T1804	3/23/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Agilent	N9030A	T905	1/24/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	01/22/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1454	01/23/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T908	01/23/2020
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T339	01/29/2020
Amplifier, 1 to 18GHz	MITEQ	AFS42-00101800-25-S-42	T931	05/11/2020
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	PRE0180176	11/01/2019
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4446A	T177	04/12/2019
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4446A	T123	01/28/2020
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4440A	T198	01/30/2020
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4440A	T99	1/28/2020
Directional Coupler	KRYTAR	152610	T1536	04/27/2019
Directional Coupler	KRYTAR	152610	T1537	04/27/2019
Wireless Communications Test Set, 8960 Series 10	Agilent	E5515C	T211	05/10/2020
Filter, HPF 3.0GHz	Micro-Tronics	HPM17543	T487	12/04/2019
Filter, HPF 1.2GHz	Micro-Tronics	WHKX1.2/15G-6ST	T1182	05/19/2019
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	T459	01/24/2020
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T959	02/16/2020
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T1871	02/18/2020
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T921	02/18/2020
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T376	02/21/2020
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T958	02/20/2020
Chamber, Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	T754	08/15/2019
Power Meter, P-series single channel	Keysight	N1911A	T1268	01/31/2020
Power Sensor	Keysight	N1921A	T1228	03/01/2020
Antenna, Horn 1-18GHz	ETS Lindgren	T3117	T346	05/14/2020
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T344	05/07/2020
Antenna, Horn 18-26GHz	ARA	MWH-1826/B	T447	6/16/2019
Antenna, Horn 26-40GHz	ARA	MWH-2640/B	T446	8/9/2019
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	PRE0181574	08/01/2019
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	PRE0077974	05/13/2020
Antenna, Active Loop 9KHz to 30MHz	EMCO	6502	T1616	10/18/2019
UL AUTOMATION SOFTWARE				
CLT Software	UL	UL RF	Ver 9.5, April 26, 2016	
Power Measurement Software	UL	UL RF	Ver 2.2, June 2017	

NOTES:

- For equipment listed above that had a calibration due during the testing period, its use was paused to allow for calibration.

7. RF OUTPUT POWER VERIFICATION

RULE PART(S)

FCC: §2.1046

MODES TESTED

- LTE Band 5
- LTE Band 7
- LTE Band 41

RESULT

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows:

7.1. LTE BAND 5

ID:	10646	Date:	06/18/19
------------	-------	--------------	----------

OUTPUT POWER FOR LTE BAND 5 (3.0MHz + 5.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3MHz / 5MHz	825.5	829.4	1	14	1	0	24.7	24.3	22.6	23.2	21.8	21.3
			15	0	25	0	24.8	24.3	22.6	21.9	21.8	21.2
	834.1	838.0	1	14	1	0	24.7	24.4	22.6	23.0	21.7	21.1
			15	0	25	0	24.7	24.2	22.7	21.9	21.9	21.3
	842.6	846.5	1	14	1	0	24.6	24.3	22.6	22.9	21.8	21.1
			15	0	25	0	24.7	24.2	22.7	21.9	21.7	21.1

OUTPUT POWER FOR LTE BAND 5 (5.0MHz + 3.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5MHz / 3MHz	826.5	830.4	1	24	1	0	24.7	24.1	23.2	23.3	22.5	21.7
			25	0	15	0	22.9	21.9	21.8	21.0	20.2	20.1
	835.0	838.9	1	24	1	0	24.8	24.1	23.3	22.8	22.1	21.1
			25	0	15	0	22.9	21.9	21.9	20.9	20.0	19.9
	846.5	842.6	1	24	1	0	24.4	24.0	23.0	23.2	22.5	21.6
			25	0	15	0	22.2	21.6	21.7	21.1	20.1	20.1

OUTPUT POWER FOR LTE BAND 5 (5.0MHz + 10.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5MHz / 10MHz	826.5	833.7	1	24	1	0	24.8	23.8	21.7	23.0	22.2	20.2
			1	0	1	49	16.3	16.3	16.2	14.5	14.4	14.6
			25	0	50	0	22.8	21.8	21.8	21.1	20.1	20.2
	831.8	839.0	1	24	1	0	24.9	24.0	22.0	23.4	22.2	20.6
			1	0	1	49	16.2	16.2	16.3	14.4	14.4	14.7
			25	0	50	0	22.6	21.8	21.7	21.1	20.1	20.2
	836.8	844.0	1	24	1	0	24.7	23.8	21.6	23.1	22.1	20.5
			1	0	1	49	16.1	16.2	16.2	14.5	14.4	14.6
			25	0	50	0	22.6	21.6	21.7	21.0	20.0	20.1

OUTPUT POWER FOR LTE BAND 5 (10.0MHz + 5.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10MHz/ 5MHz	829.0	836.2	1	49	1	0	25.0	24.1	21.9	23.5	22.6	20.6
			50	0	25	0	22.8	21.8	21.7	21.1	20.2	20.3
	834.3	841.5	1	49	1	0	24.8	23.9	21.8	23.1	22.2	20.2
			50	0	25	0	22.7	21.8	21.7	21.0	20.1	20.2
	839.3	846.5	1	49	1	0	24.9	24.0	21.8	23.1	22.2	19.9
			50	0	25	0	22.7	21.7	21.6	21.0	20.0	20.1

OUTPUT POWER FOR LTE BAND 5 (10.0MHz + 10.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10MHz/ 10MHz	829.0	838.9	1	49	1	0	24.9	24.1	22.0	23.4	22.4	20.6
			1	0	1	49	16.2	16.4	16.2	14.4	14.4	14.5
			50	0	50	0	22.7	21.7	21.7	21.0	20.0	20.1
	831.5	841.4	1	49	1	0	24.9	24.0	21.9	23.3	22.2	20.5
			1	0	1	49	16.2	16.3	16.2	14.4	14.4	14.5
			50	0	50	0	22.6	21.7	21.7	21.0	19.9	20.2
	834.1	844.0	1	49	1	0	24.8	23.8	21.7	23.1	22.2	20.3
			1	0	1	49	16.2	16.3	16.0	14.4	14.5	14.5
			50	0	50	0	22.6	21.7	21.7	20.9	20.0	20.1

7.2. LTE BAND 7

ID:	10646	Date:	6/18/19
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 7 (10.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10MHz / 20MHz	2505.5	2519.9	1	49	1	0	24.8	23.6	21.8	20.2	19.2	16.8
			50	0	100	0	22.8	21.8	21.8	18.4	17.4	17.5
	2525.6	2540.0	1	49	1	0	25.0	23.4	22.1	20.3	19.2	17.7
			50	0	100	0	22.6	21.8	21.7	18.3	17.4	17.4
	2545.5	2560.0	1	49	1	0	24.8	24.0	21.7	20.3	18.9	17.7
			50	0	100	0	22.7	21.7	21.7	18.3	17.3	17.4

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10MHz / 20MHz	2505.5	2519.9	1	49	1	0	23.7	22.9	20.5	17.9	17.0	14.8
			50	0	100	0	22.1	21.0	21.1	15.8	14.8	14.8
	2525.6	2540.0	1	49	1	0	24.0	23.2	21.2	18.0	16.5	14.4
			50	0	100	0	22.2	21.3	21.3	15.9	14.8	14.7
	2545.5	2560.0	1	49	1	0	24.4	23.6	21.5	17.8	16.4	15.1
			50	0	100	0	22.2	21.2	21.1	15.6	14.7	14.8

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 10.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 10MHz	2510.0	2524.4	1	99	1	0	24.7	23.8	21.8	20.4	19.5	17.7
			1	0	1	49	16.3	16.3	16.4	11.9	11.8	11.9
			100	0	50	0	22.7	21.7	21.7	18.4	17.3	17.4
	2530.1	2544.5	1	99	1	0	24.8	23.8	21.9	20.1	19.3	17.5
			1	0	1	49	16.2	16.2	16.3	11.9	11.9	11.9
			100	0	50	0	22.7	21.7	21.7	18.3	17.4	17.3
	2550.1	2564.5	1	99	1	0	24.8	23.8	22.0	20.5	19.5	17.7
			1	0	1	49	16.2	16.2	16.3	11.8	11.8	11.8
			100	0	50	0	22.7	21.7	21.7	18.3	17.3	17.4

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 10MHz	2510.0	2524.4	1	99	1	0	24.5	23.5	21.6	18.1	17.1	15.2
			1	0	1	49	15.4	15.4	15.5	9.3	9.2	9.3
			100	0	50	0	22.1	21.2	21.2	15.8	15.0	14.9
	2530.1	2544.5	1	99	1	0	24.3	23.4	21.4	17.8	16.9	15.0
			1	0	1	49	15.6	15.7	15.6	9.3	9.3	9.4
			100	0	50	0	22.3	21.3	21.2	15.9	14.9	14.9
	2550.1	2564.5	1	99	1	0	24.3	23.4	21.3	17.9	17.0	15.1
			1	0	1	49	15.6	15.5	15.5	9.2	9.3	9.3
			100	0	50	0	22.2	21.2	21.1	15.8	14.9	14.9

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 15.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 15MHz	2507.5	2522.5	1	74	1	0	24.8	23.8	21.8	20.4	19.4	17.5
			75	0	75	0	22.7	21.7	21.8	18.3	17.3	17.4
	2527.5	2542.5	1	74	1	0	24.7	23.9	21.9	20.2	19.5	17.6
			75	0	75	0	22.7	21.7	21.7	18.4	17.3	17.4
	2547.5	2562.5	1	74	1	0	24.8	24.0	21.8	20.4	19.5	17.6
			75	0	75	0	22.7	21.6	21.7	18.3	17.3	17.3

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 15MHz	2507.5	2522.5	1	74	1	0	24.2	23.4	21.3	18.1	17.2	15.2
			75	0	75	0	22.1	21.2	21.1	15.9	14.9	14.9
	2527.5	2542.5	1	74	1	0	24.1	23.4	21.3	18.0	17.0	15.0
			75	0	75	0	22.2	21.3	21.2	15.9	14.9	14.9
	2547.5	2562.5	1	74	1	0	24.2	23.4	21.3	18.0	17.0	14.9
			75	0	75	0	22.1	21.1	21.1	15.8	14.7	14.8

OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 20MHz	2507.8	2524.9	1	74	1	0	24.8	24.1	22.0	20.5	19.6	17.6
			75	0	100	0	22.8	21.9	21.9	18.4	17.5	17.5
	2525.3	2542.4	1	74	1	0	24.8	24.0	22.0	20.5	19.7	17.5
			75	0	100	0	22.8	21.8	21.8	18.4	17.4	17.5
	2542.9	2560.0	1	74	1	0	24.7	23.9	21.8	20.4	19.6	17.6
			75	0	100	0	22.8	21.8	21.8	18.4	17.4	17.4

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 20MHz	2507.8	2524.9	1	74	1	0	24.3	23.3	21.5	18.3	17.3	15.2
			75	0	100	0	22.2	21.3	21.2	16.0	15.0	15.0
	2525.3	2542.4	1	74	1	0	24.2	23.4	21.5	18.2	17.3	15.1
			75	0	100	0	22.3	21.4	21.3	16.0	15.0	15.0
	2542.9	2560.0	1	74	1	0	24.3	23.5	21.5	17.9	17.1	15.1
			75	0	100	0	22.2	21.3	21.2	15.9	14.9	14.9

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 15.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 15MHz	2510.0	2527.1	1	99	1	0	24.9	23.9	22.0	20.5	19.5	17.8
			100	0	75	0	22.9	21.8	21.8	18.4	17.4	17.5
	2527.6	2544.7	1	99	1	0	24.7	23.8	21.8	20.1	19.3	17.6
			100	0	75	0	22.8	21.7	21.8	18.4	17.4	17.4
	2545.1	2562.2	1	99	1	0	24.7	23.9	21.9	20.5	19.5	17.7
			100	0	75	0	22.8	21.8	21.8	18.5	17.4	17.4

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 15MHz	2510.0	2527.1	1	99	1	0	24.5	23.6	21.6	18.1	17.1	15.2
			100	0	75	0	22.2	21.3	21.3	16.0	15.0	15.0
	2527.6	2544.7	1	99	1	0	24.1	23.3	21.4	17.9	16.9	15.0
			100	0	75	0	22.3	21.3	21.3	16.0	15.0	15.0
	2545.1	2562.2	1	99	1	0	24.4	23.5	21.4	18.0	16.9	15.1
			100	0	75	0	22.2	21.3	21.2	15.9	14.9	15.0

OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz/ 20MHz	2510.0	2529.8	1	99	1	0	24.8	24.1	22.1	20.5	19.7	17.9
			1	0	1	99	16.1	16.2	16.2	11.7	11.7	11.7
			100	0	100	0	22.9	21.9	21.9	18.4	17.5	17.5
	2525.1	2544.9	1	99	1	0	24.9	23.9	22.1	20.3	19.4	17.7
			1	0	1	99	16.3	16.2	16.4	11.6	11.5	11.8
			100	0	100	0	22.8	21.8	21.8	18.4	17.4	17.4
	2540.2	2560.0	1	99	1	0	24.9	23.9	22.0	20.4	19.5	17.8
			1	0	1	99	15.8	15.7	15.9	11.4	11.4	11.8
			100	0	100	0	22.8	21.8	21.8	18.5	17.4	17.4

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz/ 20MHz	2510.0	2529.8	1	99	1	0	24.4	23.6	21.6	18.1	17.2	15.4
			1	0	1	99	15.0	15.1	15.4	8.9	9.0	9.4
			100	0	100	0	22.2	21.1	21.2	16.1	15.0	15.0
	2525.1	2544.9	1	99	1	0	24.2	23.3	21.6	18.1	17.1	15.2
			1	0	1	99	15.2	15.3	15.6	9.1	9.3	9.2
			100	0	100	0	22.3	21.4	21.3	16.0	15.0	15.0
	2540.2	2560.0	1	99	1	0	24.4	23.5	21.6	18.1	17.1	15.0
			1	0	1	99	15.5	15.2	15.4	8.9	8.9	8.9
			100	0	100	0	22.3	21.3	21.2	15.9	14.9	15.0

7.3. LTE BAND 41

ID:	10646	Date:	6/18/19
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 41 (5.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5MHz / 20MHz	2499.3	2511.0	1	24	1	0	27.0	25.9	24.1	22.5	21.4	19.2
			25	0	100	0	25.0	24.0	24.0	20.5	19.5	19.2
	2583.8	2595.5	1	24	1	0	27.0	25.9	23.9	22.6	21.6	19.3
			25	0	100	0	24.9	23.9	23.9	20.5	19.5	19.2
	2668.3	2680.0	1	24	1	0	26.3	25.5	22.4	22.6	21.6	19.5
			25	0	100	0	24.8	23.7	23.7	20.4	19.5	19.2

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5MHz / 20MHz	2499.3	2511.0	1	24	1	0	25.2	24.2	23.2	20.9	19.9	18.7
			25	0	100	0	24.1	23.1	23.2	19.0	18.1	18.6
	2583.8	2595.5	1	24	1	0	26.4	25.3	23.6	20.6	19.6	18.5
			25	0	100	0	24.2	23.1	23.2	18.8	17.8	18.5
	2668.3	2680.0	1	24	1	0	25.7	24.7	22.9	19.4	18.5	17.5
			25	0	100	0	23.6	22.6	22.5	17.7	16.8	17.6

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 5.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 5MHz	2506.0	2517.7	1	99	1	0	26.7	25.8	24.3	22.6	21.8	19.5
			1	0	1	24	17.9	18.2	18.4	13.9	14.0	13.6
			100	0	25	0	24.5	23.6	24.0	20.5	19.5	19.2
	2590.5	2602.2	1	99	1	0	26.5	25.6	24.0	22.6	21.6	19.5
			1	0	1	24	17.9	17.8	18.3	13.9	13.9	13.8
			100	0	25	0	24.4	23.5	23.7	20.5	19.5	19.3
	2675.0	2686.7	1	99	1	0	26.4	25.3	23.8	22.5	21.5	19.3
			1	0	1	24	17.7	17.8	18.1	13.9	13.9	13.7
			100	0	25	0	24.2	23.1	23.7	20.4	19.4	19.2

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 5MHz	2506.0	2517.7	1	99	1	0	26.4	25.4	23.5	20.9	20.1	18.2
			1	0	1	24	17.6	17.7	17.6	11.9	12.1	12.1
			100	0	25	0	24.2	23.3	23.3	18.7	17.8	17.9
	2590.5	2602.2	1	99	1	0	26.3	25.4	23.3	20.5	19.5	17.8
			1	0	1	24	17.7	17.7	17.7	11.8	11.8	12.0
			100	0	25	0	24.1	23.2	23.2	18.4	17.4	17.5
	2675.0	2686.7	1	99	1	0	25.7	24.7	22.6	20.7	19.8	18.1
			1	0	1	24	17.0	17.1	16.9	12.1	12.2	12.5
			100	0	25	0	23.5	22.5	22.5	18.7	17.8	17.9

OUTPUT POWER FOR LTE BAND 41 (10.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10MHz / 20MHz	2501.5	2515.9	1	49	1	0	26.8	25.7	24.1	22.6	21.6	19.4
			50	0	100	0	24.7	23.8	23.9	20.5	19.5	19.3
	2583.6	2598.0	1	49	1	0	26.8	25.7	24.1	22.6	21.5	19.3
			50	0	100	0	24.6	23.6	23.8	20.6	19.5	19.3
	2665.6	2680.0	1	49	1	0	26.4	25.2	24.0	22.7	21.8	19.6
			50	0	100	0	24.4	23.5	23.6	20.5	19.5	19.2

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10MHz / 20MHz	2501.5	2515.9	1	49	1	0	26.2	25.1	23.3	20.8	19.9	18.1
			50	0	100	0	24.1	23.2	23.4	19.0	18.1	18.2
	2583.6	2598.0	1	49	1	0	26.3	25.4	23.5	20.9	18.4	18.2
			50	0	100	0	24.2	23.2	23.2	18.8	17.8	18.0
	2665.6	2680.0	1	49	1	0	25.7	24.7	22.7	20.7	19.6	18.2
			50	0	100	0	23.6	22.6	22.5	18.8	17.9	18.1

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 10.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 10MHz	2506.0	2520.4	1	99	1	0	26.8	25.7	24.1	22.7	21.8	19.6
			100	0	50	0	24.5	23.6	23.9	20.6	19.5	19.4
	2588.1	2602.5	1	99	1	0	26.6	25.6	23.9	22.6	21.7	19.4
			100	0	50	0	24.4	23.5	23.7	20.4	19.5	19.2
	2670.1	2684.5	1	99	1	0	26.4	25.5	23.8	22.6	21.6	19.4
			100	0	50	0	24.3	23.3	23.6	20.5	19.5	19.2

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 10MHz	2506.0	2520.4	1	99	1	0	26.4	25.5	23.6	20.9	20.1	18.3
			100	0	50	0	24.3	23.2	23.4	18.7	17.8	17.9
	2588.1	2602.5	1	99	1	0	26.4	25.4	23.4	20.5	19.5	17.8
			100	0	50	0	24.1	23.2	23.2	18.3	17.4	17.5
	2670.1	2684.5	1	99	1	0	25.7	24.8	22.7	20.7	19.7	18.1
			100	0	50	0	23.5	22.5	22.5	18.6	17.6	17.8

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 15.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 15MHz	2503.5	2518.5	1	74	1	0	26.7	25.6	23.9	22.7	21.7	19.4
			75	0	75	0	24.5	23.6	23.8	20.5	19.5	19.3
	2585.5	2600.5	1	74	1	0	26.6	25.6	23.7	22.6	21.7	19.2
			75	0	75	0	24.4	23.5	23.6	20.5	19.5	19.3
	2667.5	2682.5	1	74	1	0	26.4	25.5	23.6	22.6	21.6	19.3
			75	0	75	0	24.3	23.3	23.5	20.5	19.5	19.2
Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 15MHz	2503.5	2518.5	1	74	1	0	26.2	25.3	23.4	20.8	20.0	18.1
			75	0	75	0	24.2	23.3	23.3	18.7	17.8	17.8
	2585.5	2600.5	1	74	1	0	26.3	25.4	23.2	20.5	19.8	18.0
			75	0	75	0	24.1	23.2	23.1	18.3	17.4	17.5
	2667.5	2682.5	1	74	1	0	25.6	24.7	22.5	20.6	19.8	17.9
			75	0	75	0	23.5	22.5	22.4	18.5	17.5	17.7

OUTPUT POWER FOR LTE BAND 41 (15.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 20MHz	2503.8	2520.9	1	74	1	0	26.7	25.6	24.2	22.5	21.4	19.5
			75	0	100	0	24.7	23.7	24.0	20.3	19.3	19.5
	2583.3	2600.4	1	74	1	0	26.6	25.5	24.2	22.4	21.5	19.5
			75	0	100	0	24.5	23.5	23.9	20.2	19.2	19.4
	2662.9	2680.0	1	74	1	0	26.4	25.4	23.9	22.4	21.4	19.6
			75	0	100	0	24.4	23.4	23.8	20.2	19.2	19.4
Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15MHz / 20MHz	2503.8	2520.9	1	74	1	0	26.3	25.5	23.6	20.8	20.0	18.0
			75	0	100	0	24.3	23.4	23.5	18.8	17.9	17.9
	2583.3	2600.4	1	74	1	0	26.4	25.4	23.3	20.6	19.7	17.9
			75	0	100	0	24.3	23.3	23.2	18.5	17.6	17.6
	2662.9	2680.0	1	74	1	0	25.7	24.8	22.5	20.4	19.4	17.9
			75	0	100	0	23.6	22.7	22.6	18.4	17.5	17.7

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 15.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 15MHz	2506.0	2523.1	1	99	1	0	26.9	25.9	24.3	22.6	21.8	19.7
			100	0	75	0	24.8	23.8	24.1	20.5	19.5	19.4
	2585.6	2602.7	1	99	1	0	26.7	25.8	24.1	22.5	21.6	19.5
			100	0	75	0	24.6	23.6	23.9	20.4	19.4	19.4
	2665.1	2682.2	1	99	1	0	26.6	25.5	23.9	22.5	21.6	19.5
			100	0	75	0	24.4	23.5	23.8	20.4	19.4	19.4

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz / 15MHz	2506.0	2523.1	1	99	1	0	26.5	25.6	23.7	20.9	20.1	18.3
			100	0	75	0	24.4	23.3	23.5	18.8	17.9	18.0
	2585.6	2602.7	1	99	1	0	26.4	25.4	23.3	20.6	19.8	17.9
			100	0	75	0	24.2	23.3	23.2	18.5	17.5	17.6
	2665.1	2682.2	1	99	1	0	25.8	24.8	22.7	20.5	19.7	18.0
			100	0	75	0	23.7	22.7	22.6	18.4	17.5	17.7

OUTPUT POWER FOR LTE BAND 41 (20.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 1			Ant 2		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz/ 20MHz	2506.0	2525.8	1	99	1	0	26.7	25.8	24.4	22.7	21.8	19.8
			1	0	1	99	17.8	17.9	18.1	13.6	13.7	13.5
			100	0	100	0	24.6	23.6	24.0	20.6	19.5	19.5
	2583.1	2602.9	1	99	1	0	26.5	25.6	24.2	22.6	21.7	19.7
			1	0	1	99	17.5	17.6	18.1	13.5	13.8	13.5
			100	0	100	0	24.4	23.4	23.9	20.4	19.5	19.4
	2660.2	2680.0	1	99	1	0	26.4	25.4	24.0	22.7	21.7	19.7
			1	0	1	99	17.5	17.6	18.1	13.7	13.7	13.7
			100	0	100	0	24.2	23.3	23.8	20.5	19.4	19.4
			1	99	1	0	26.4	25.4	24.0	22.7	21.7	19.7

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average (dBm)					
			Size	Offset	Size	Offset	Ant 3			Ant 4		
							QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20MHz/ 20MHz	2506.0	2525.8	1	99	1	0	26.5	25.5	23.6	21.0	20.1	18.3
			1	0	1	99	17.4	17.5	17.6	11.8	12.1	11.9
			100	0	100	0	24.4	23.4	23.5	18.9	17.9	17.9
	2583.1	2602.9	1	99	1	0	26.4	25.4	23.5	20.6	19.8	18.0
			1	0	1	99	17.4	17.5	17.5	11.6	11.7	11.8
			100	0	100	0	24.2	23.3	23.3	18.5	17.5	17.6
	2660.2	2680.0	1	99	1	0	25.8	24.8	22.6	20.5	19.7	18.0
			1	0	1	99	16.9	17.0	16.9	11.3	11.3	11.8
			100	0	100	0	23.7	22.7	22.6	18.3	17.5	17.7
			1	99	1	0	26.4	25.4	23.5	20.6	19.8	18.0

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

MODES TESTED

- LTE Band 5
- LTE Band 7
- LTE Band 41

RESULTS

There is no limit required and power is the same for low, middle and high channel; therefore, only middle channel was tested

LTE BAND 5

Band	Mode	RB Allocation/RB Offset	f (MHz)	99% BW (MHz)	- 26dB BW (MHz)
LTE BAND 5	3MHz + 5MHz BAND QPSK	15/0 + 25/0	836.5	7.5720	10.05
	3MHz + 5MHz BAND 16QAM			7.6231	11.15
	3MHz + 5MHz BAND 64QAM			7.6441	12.51
	5MHz + 3MHz BAND QPSK	25/0 + 15/0		7.5528	8.103
	5MHz + 3MHz BAND 16QAM			7.5356	8.043
	5MHz + 3MHz BAND 64QAM			7.5322	8.007
	5MHz + 10MHz BAND QPSK	25/0 + 50/0		13.944	14.62
	5MHz + 10MHz BAND 16QAM			13.881	14.84
	5MHz + 10MHz BAND 64QAM			13.866	14.94
	10MHz + 5MHz BAND QPSK	50/0 + 25/0		13.899	14.84
	10MHz + 5MHz BAND 16QAM			13.891	14.86
	10MHz + 5MHz BAND 64QAM			13.882	14.96
	10MHz + 10MHz BAND QPSK	50/0 + 50/0		18.779	20.37
	10MHz + 10MHz BAND 16QAM			18.796	20.40
	10MHz + 10MHz BAND 64QAM			18.798	20.25

LTE BAND 7

Band	Mode	RB Allocation/RB Offset	f (MHz)	99% BW (MHz)	- 26dB BW (MHz)
LTE BAND 7	10MHz + 20MHz BAND QPSK	50/0 + 100/0	2535	28.065	30.46
	10MHz + 20MHz BAND 16QAM			28.012	30.21
	10MHz + 20MHz BAND 64QAM			28.043	30.31
	20MHz + 10MHz BAND QPSK	100/0 + 50/0		28.028	30.26
	20MHz + 10MHz BAND 16QAM			28.025	30.29
	20MHz + 10MHz BAND 64QAM			28.043	30.32
	15MHz + 15MHz BAND QPSK	75/0 + 75/0		28.619	31.26
	15MHz + 15MHz BAND 16QAM			28.579	30.91
	15MHz + 15MHz BAND 64QAM			28.568	30.95
	15MHz + 20MHz BAND QPSK	75/0 + 100/0		32.970	35.41
	15MHz + 20MHz BAND 16QAM			32.868	35.78
	15MHz + 20MHz BAND 64QAM			32.879	36.61
	20MHz + 15MHz BAND QPSK	100/0 + 75/0		32.942	37.15
	20MHz + 15MHz BAND 16QAM			32.845	35.40
	20MHz + 15MHz BAND 64QAM			32.884	35.44
	20MHz + 20MHz BAND QPSK	100/0 + 100/0		37.772	40.79
	20MHz + 20MHz BAND 16QAM			37.704	40.64
	20MHz + 20MHz BAND 64QAM			37.669	43.12

LTE BAND 41

Band	Mode	RB Allocation/RB Offset	f (MHz)	99% BW (MHz)	- 26dB BW (MHz)
LTE BAND 41 (FCC)	5MHz + 20MHz BAND QPSK	25/0 + 100/0	2593	23.199	24.82
	5MHz + 20MHz BAND 16QAM			23.227	24.85
	5MHz + 20MHz BAND 64QAM			23.178	24.81
	20MHz + 5MHz BAND QPSK	100/0 + 25/0		23.286	24.60
	20MHz + 5MHz BAND 16QAM			23.295	24.66
	20MHz + 5MHz BAND 64QAM			23.287	24.65
	10MHz + 20MHz BAND QPSK	50/0 + 100/0		28.033	29.85
	10MHz + 20MHz BAND 16QAM			28.090	29.92
	10MHz + 20MHz BAND 64QAM			27.949	29.82
	20MHz + 10MHz BAND QPSK	100/0 + 50/0		27.961	29.79
	20MHz + 10MHz BAND 16QAM			27.938	29.84
	20MHz + 10MHz BAND 64QAM			27.952	29.79
	15MHz + 15MHz BAND QPSK	75/0 + 75/0		28.511	30.56
	15MHz + 15MHz BAND 16QAM			28.571	30.57
	15MHz + 15MHz BAND 64QAM			28.499	30.58
	15MHz + 20MHz BAND QPSK	75/0 + 100/0		32.755	34.86
	15MHz + 20MHz BAND 16QAM			32.709	34.88
	15MHz + 20MHz BAND 64QAM			32.682	34.84
	20MHz + 15MHz BAND QPSK	100/0 + 75/0		32.839	34.71
	20MHz + 15MHz BAND 16QAM			32.835	34.83
	20MHz + 15MHz BAND 64QAM			32.816	34.77
	20MHz + 20MHz BAND QPSK	100/0 + 100/0		37.589	39.53
	20MHz + 20MHz BAND 16QAM			37.567	39.83
	20MHz + 20MHz BAND 64QAM			37.589	39.64

8.1.1. LTE BAND 5



LTE B5 3MHz + 5MHz QPSK RB15-0 + RB25-0



LTE B5 3MHz + 5MHz 16QAM RB15-0 + RB25-0



LTE B5 3MHz + 5MHz 64QAM RB15-0 + RB25-0



LTE B5 5MHz + 3MHz QPSK RB25-0 + RB15-0



LTE B5 5MHz + 3MHz 16QAM RB25-0 + RB15-0



LTE B5 5MHz + 3MHz 64QAM RB25-0 + RB15-0





LTE B5 10MHz + 10MHz QPSK RB50-0 + RB50-0



LTE B5 10MHz + 10MHz 16QAM RB50-0 + RB50-0



LTE B5 10MHz + 10MHz 64QAM RB50-0 + RB50-0

8.1.2. LTE BAND 7





LTE B7 15MHz + 15MHz QPSK RB75-0 + RB75-0



LTE B7 15MHz + 15MHz 16QAM RB75-0 + RB75-0



LTE B7 15MHz + 15MHz 64QAM RB75-0 + RB75-0



LTE B7 15MHz + 20MHz QPSK RB75-0 + RB100-0



LTE B7 15MHz + 20MHz 16QAM RB75-0 + RB100-0



LTE B7 15MHz + 20MHz 64QAM RB75-0 + RB100-0



LTE B7 20MHz + 15MHz QPSK RB100-0 + RB75-0



LTE B7 20MHz + 15MHz 16QAM RB100-0 + RB75-0



LTE B7 20MHz + 15MHz 64QAM RB100-0 + RB75-0



LTE B7 20MHz + 20MHz QPSK RB100-0 + RB100-0



LTE B7 20MHz + 20MHz 16QAM RB100-0 + RB100-0



LTE B7 20MHz + 20MHz 64QAM RB100-0 + RB100-0


8.1.3. LTE BAND 41



LTE B41 5MHz + 20MHz QPSK RB25-0 + RB100-0



LTE B41 5MHz + 20MHz 16QAM RB25-0 + RB100-0

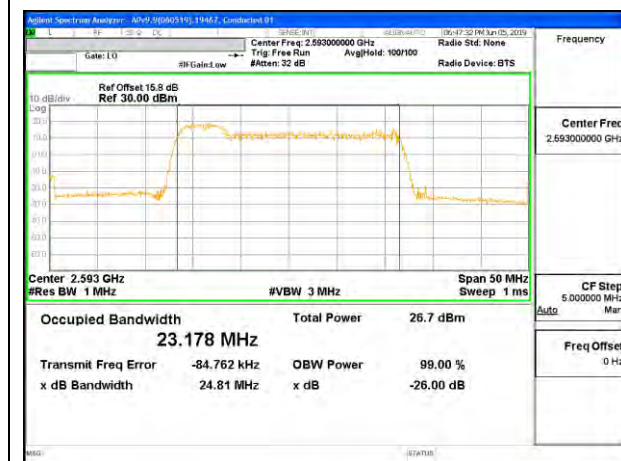

LTE B41 5MHz + 20MHz 64QAM RB25-0 + RB100-0



LTE B41 20MHz + 5MHz QPSK RB100-0 + RB25-0



LTE B41 20MHz + 5MHz 16QAM RB100-0 + RB25-0



LTE B41 20MHz + 5MHz 64QAM RB100-0 + RB25-0



LTE B41 10MHz + 20MHz QPSK RB50-0 + RB100-0




LTE B41 10MHz + 20MHz 16QAM RB50-0 + RB100-0



LTE B41 10MHz + 20MHz 64QAM RB50-0 + RB100-0



LTE B41 20MHz + 10MHz QPSK RB100-0 + RB50-0

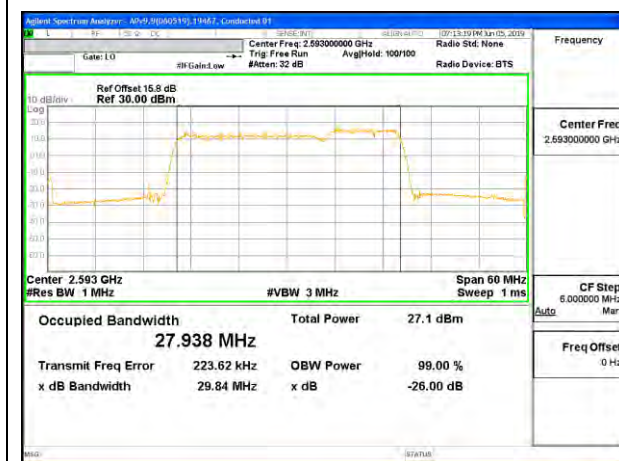

LTE B41 20MHz + 10MHz 16QAM RB100-0 + RB50-0




LTE B41 20MHz + 10MHz 64QAM RB100-0 + RB50-0



LTE B41 15MHz + 15MHz QPSK RB75-0 + RB75-0



LTE B41 15MHz + 15MHz 16QAM RB75-0 + RB75-0

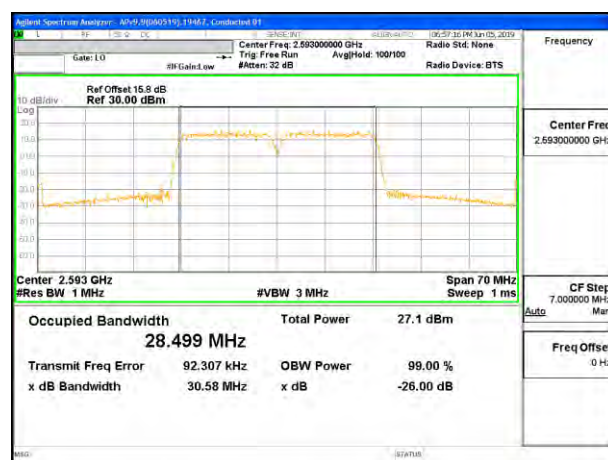

LTE B41 15MHz + 15MHz 64QAM RB75-0 + RB75-0



LTE B41 15MHz + 20MHz QPSK RB75-0 + RB100-0



LTE B41 15MHz + 20MHz 16QAM RB75-0 + RB100-0



LTE B41 15MHz + 20MHz 64QAM RB75-0 + RB100-0



LTE B41 20MHz + 15MHz QPSK RB100-0 + RB75-0



LTE B41 20MHz + 15MHz 16QAM RB100-0 + RB75-0



LTE B41 20MHz + 15MHz 64QAM RB100-0 + RB75-0



LTE B41 20MHz + 20MHz QPSK RB100-0 + RB100-0



LTE B41 20MHz + 20MHz 16QAM RB100-0 + RB100-0



LTE B41 20MHz + 20MHz 64QAM RB100-0 + RB100-0

8.2. BAND EDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917, §27.53

LIMITS

FCC: §22.917, §24.238, §27.53(h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE FOR FCC PART 27


(m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.


MODES TESTED


- LTE Band 5
- LTE Band 7
- LTE Band 41


RESULTS


8.2.1. LTE BAND 5

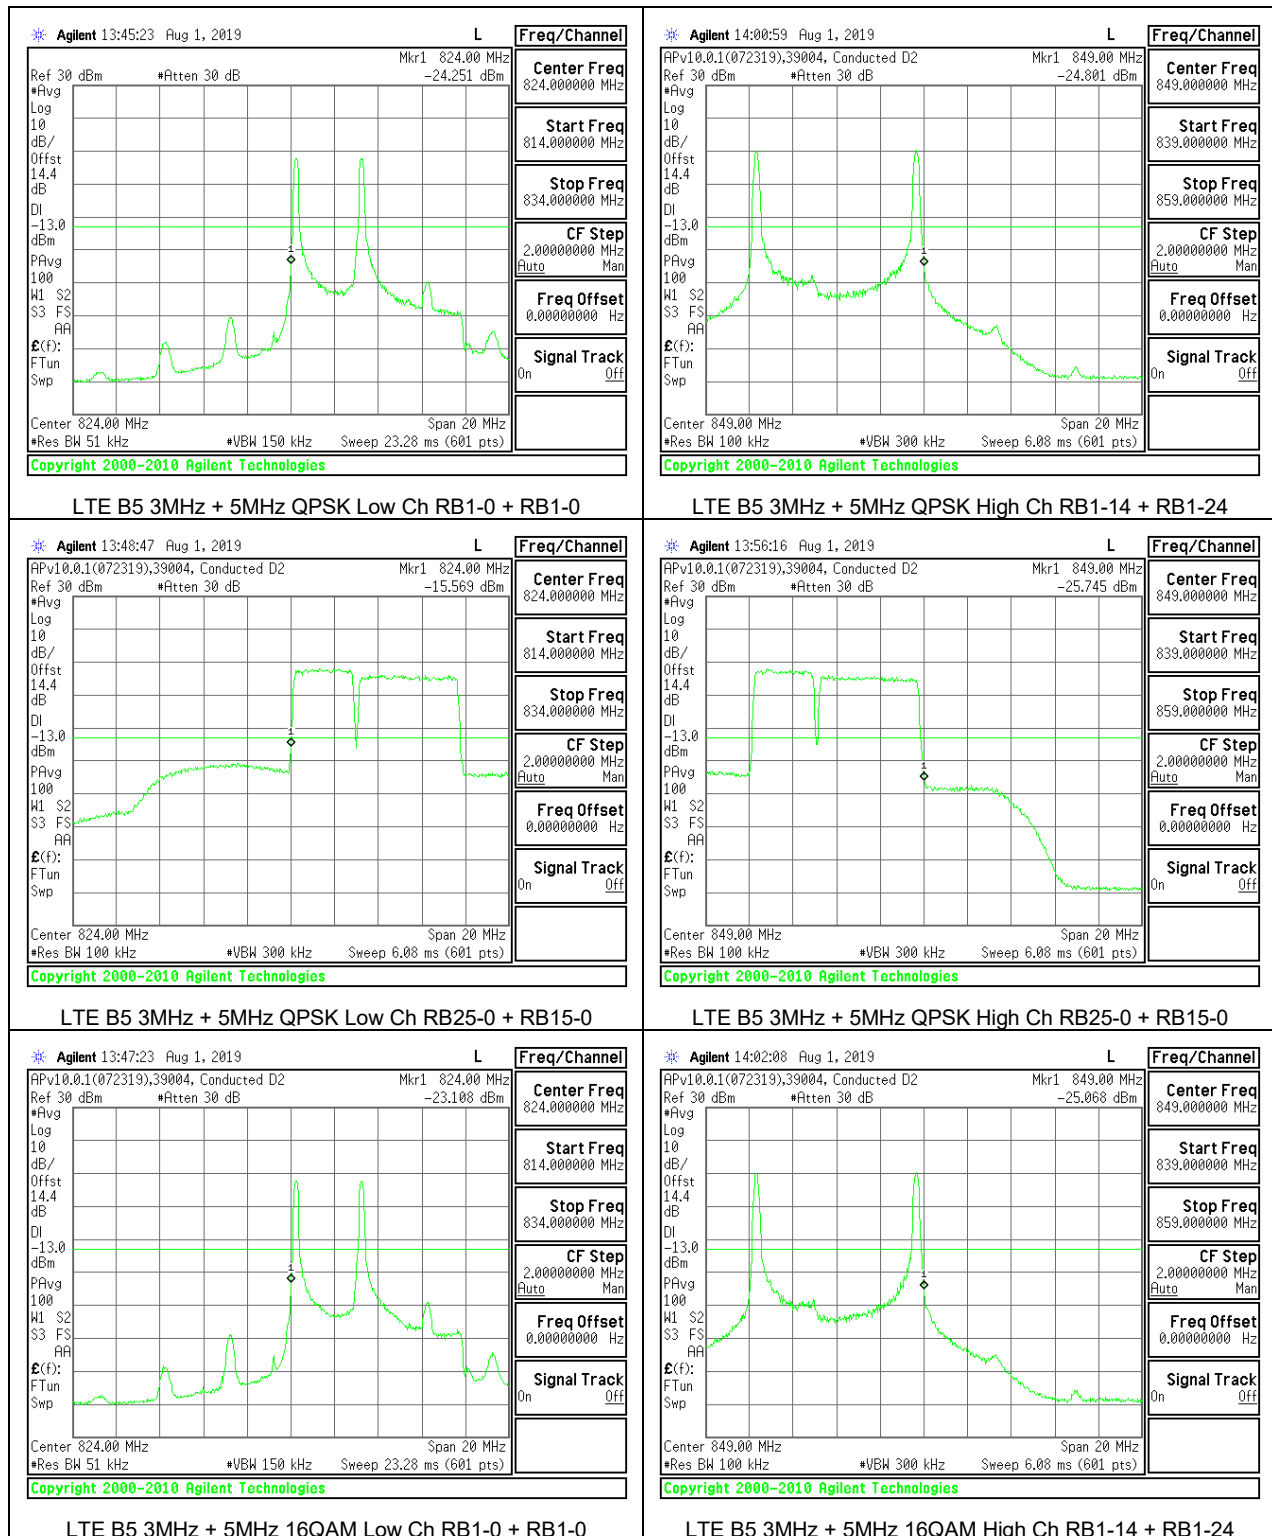


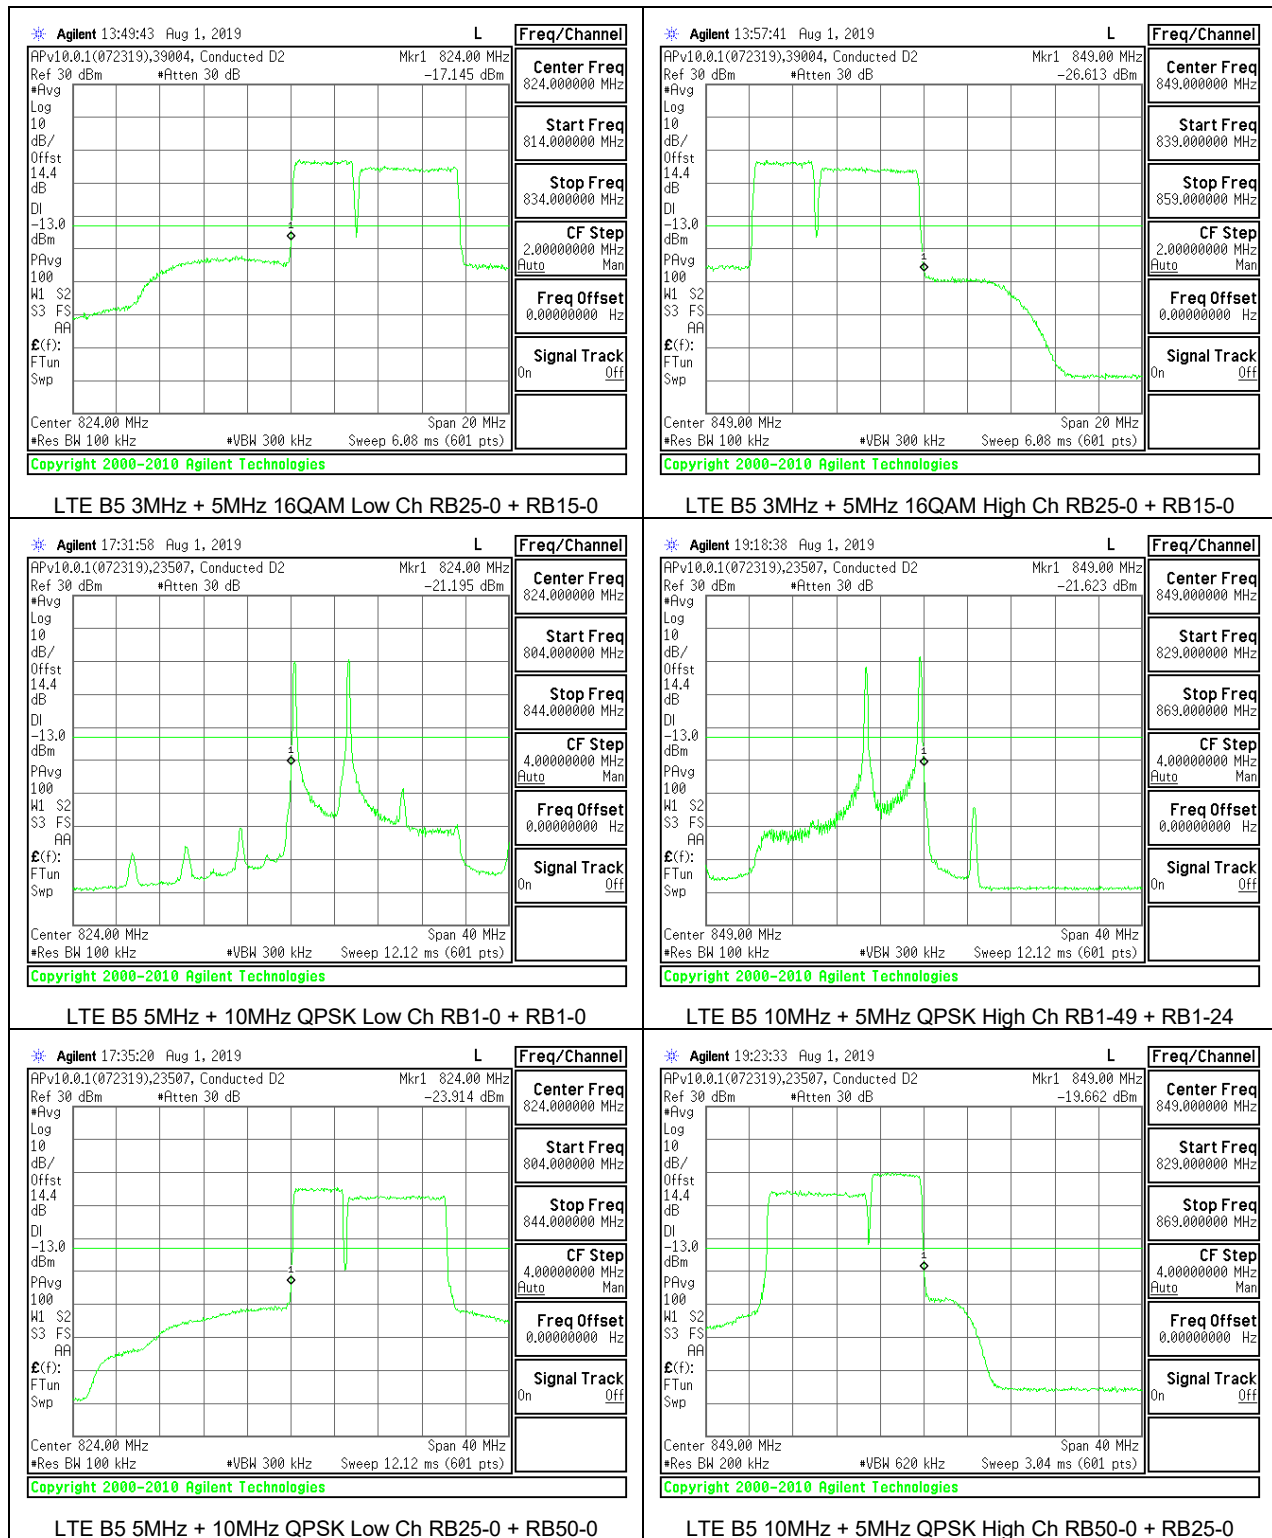


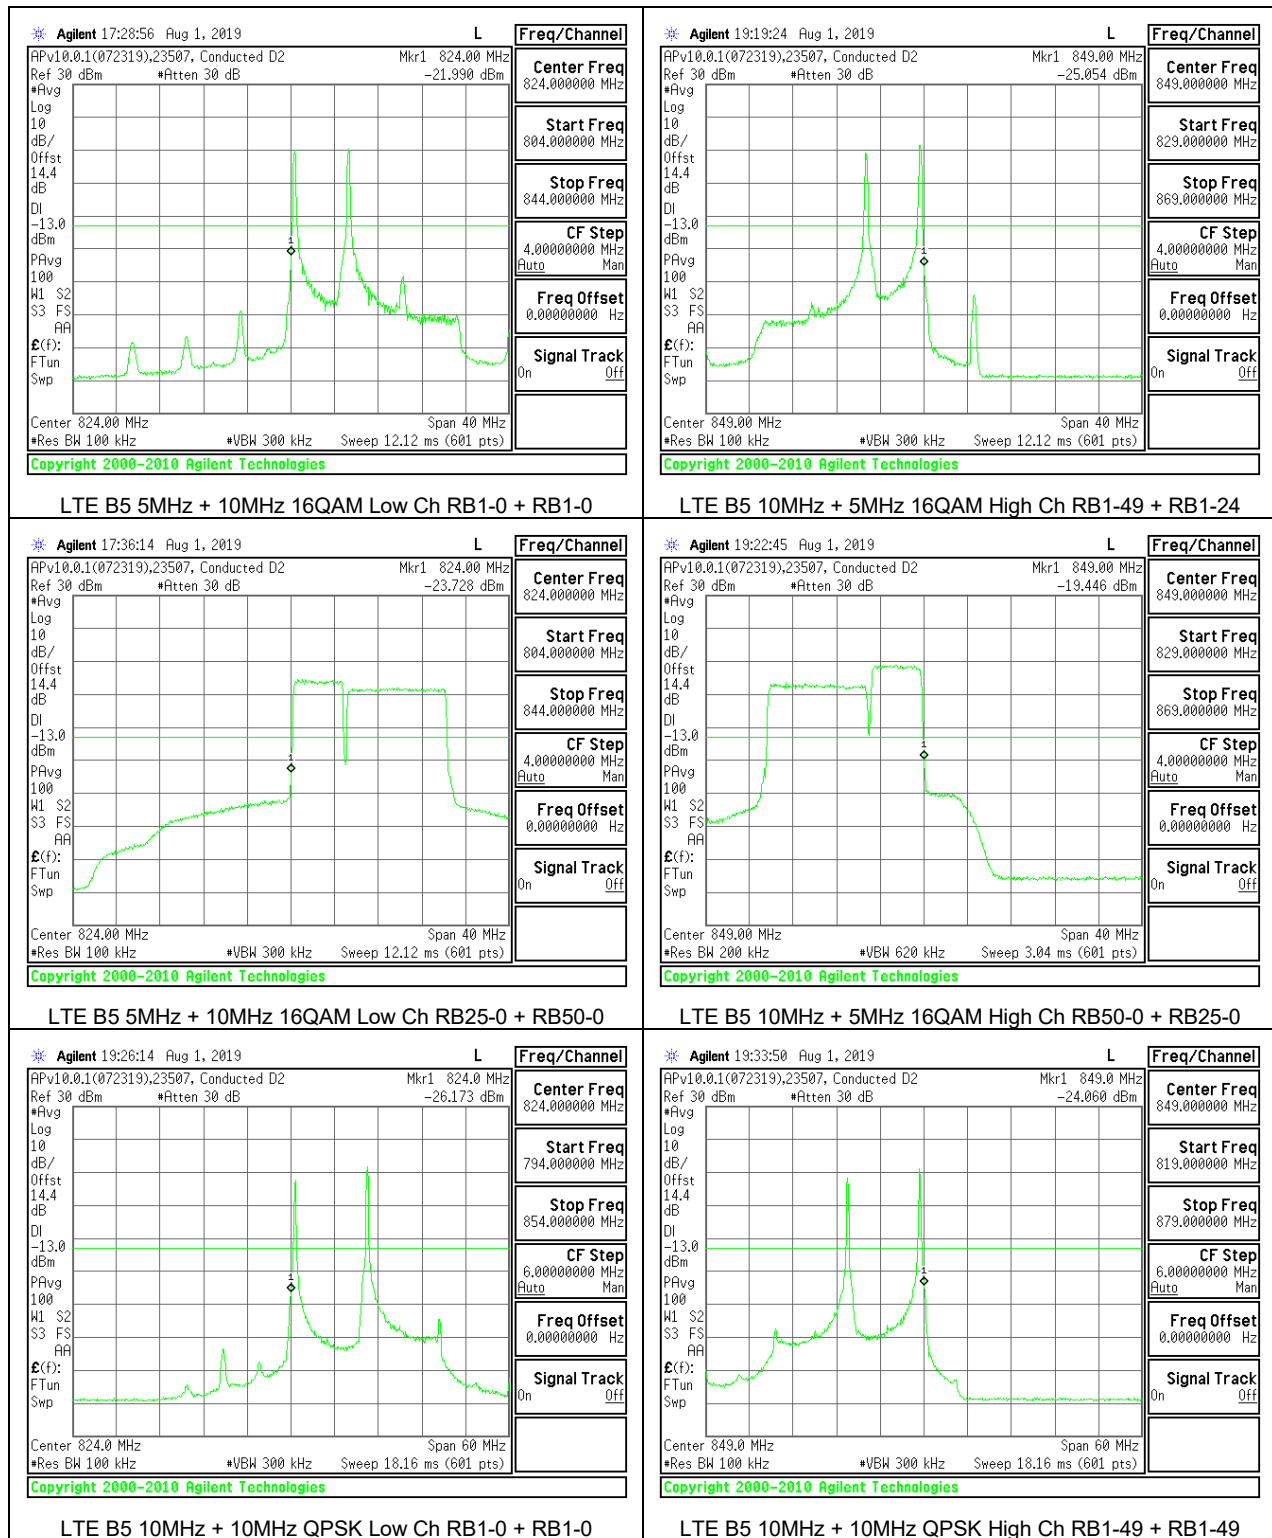

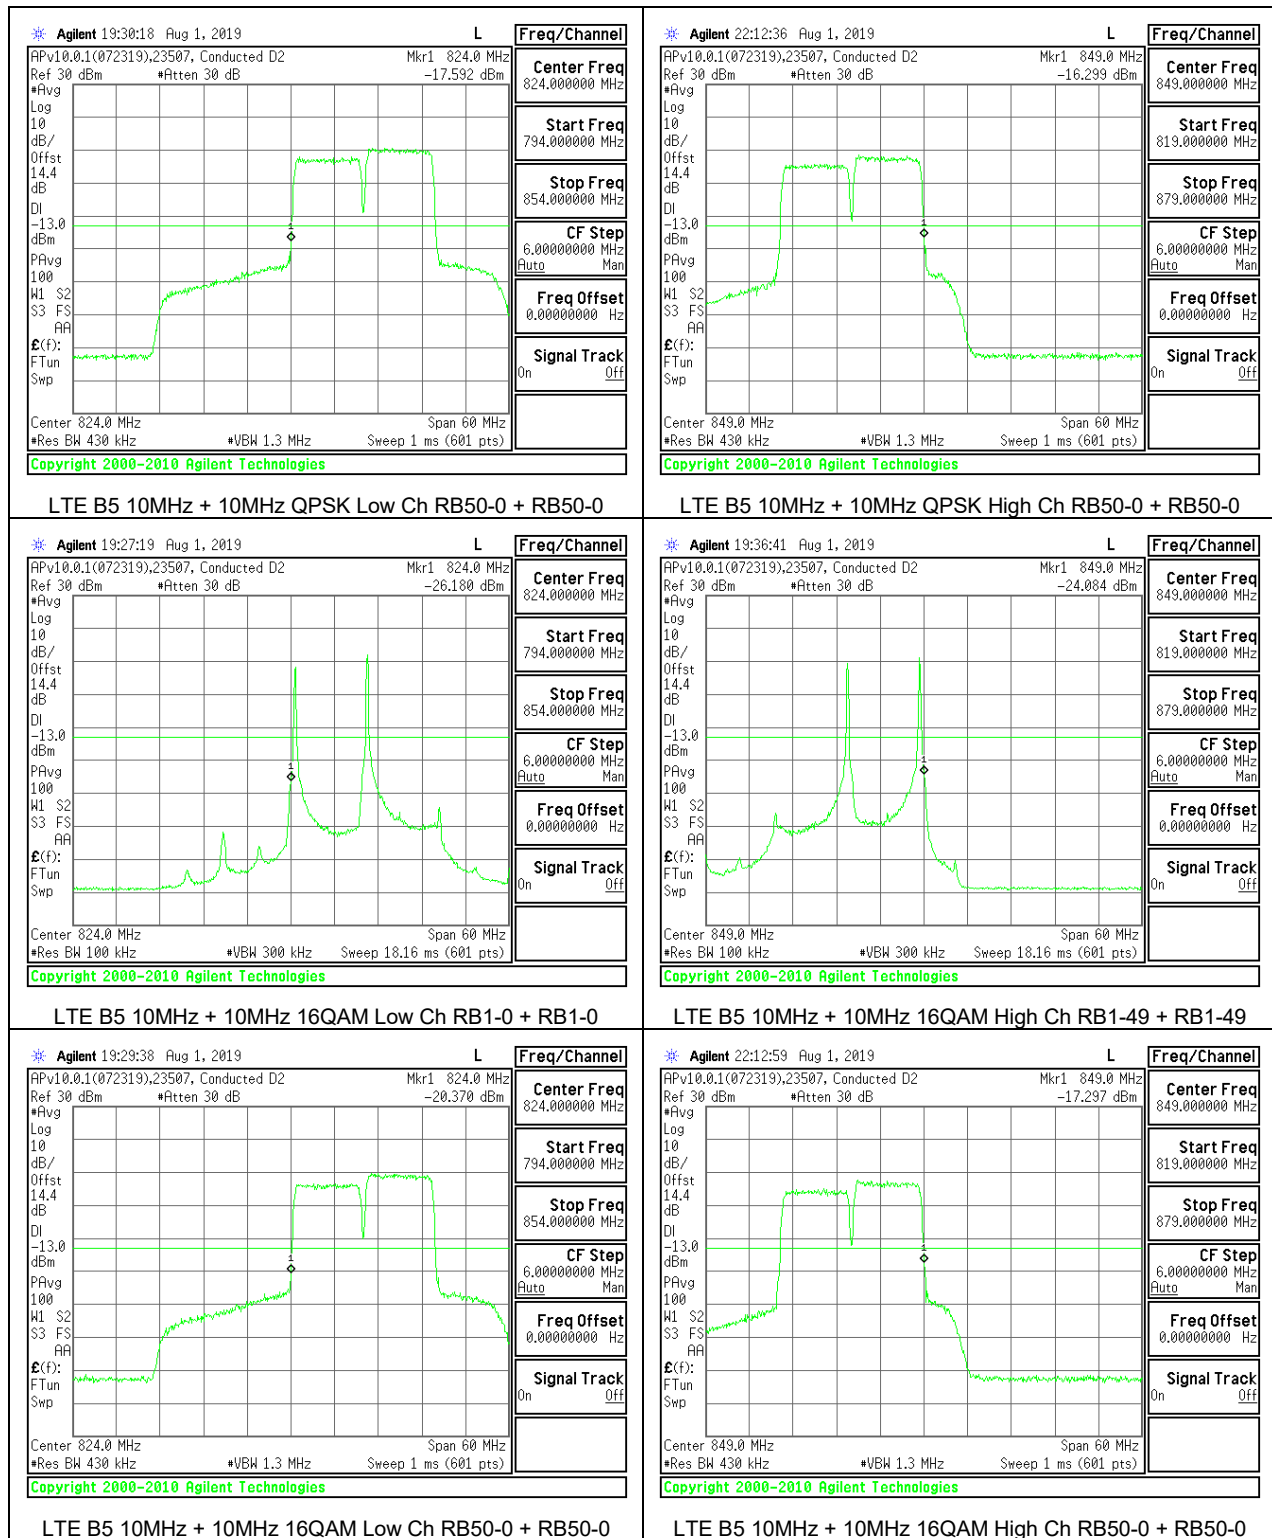


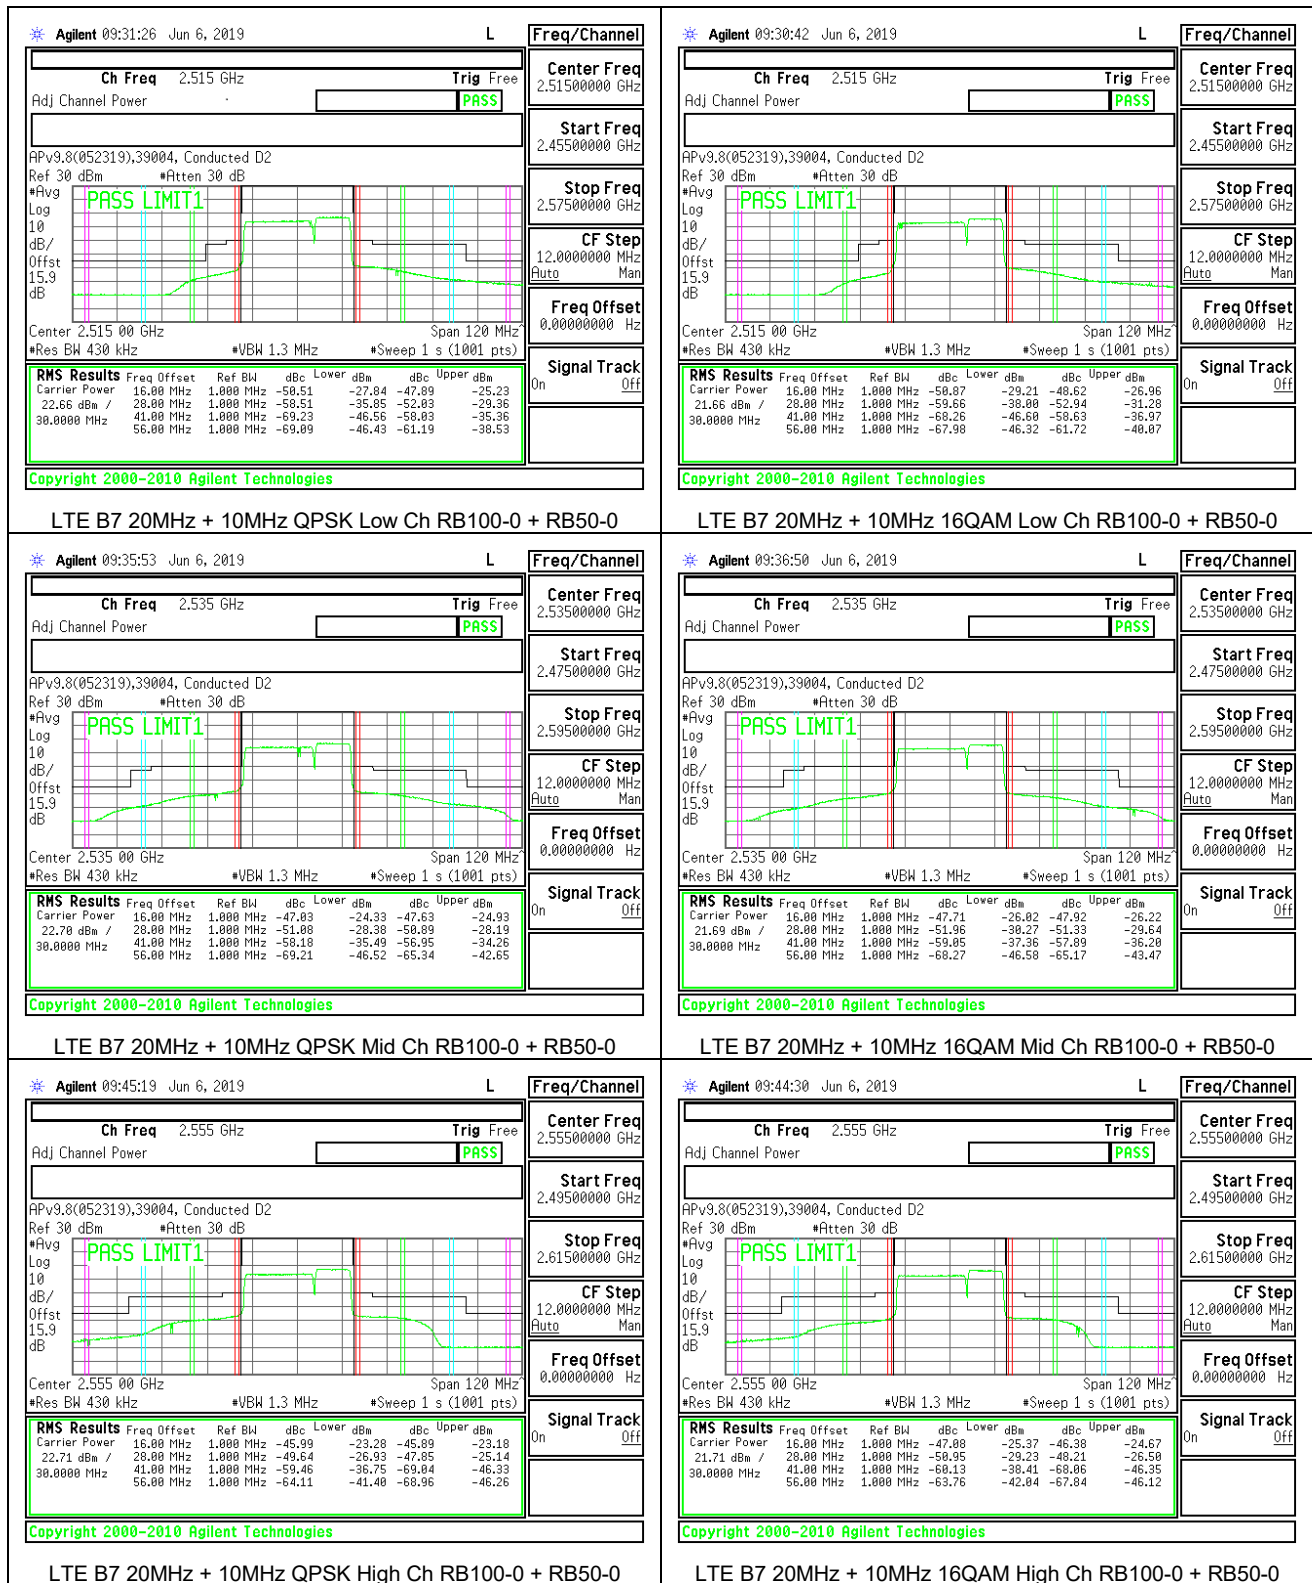


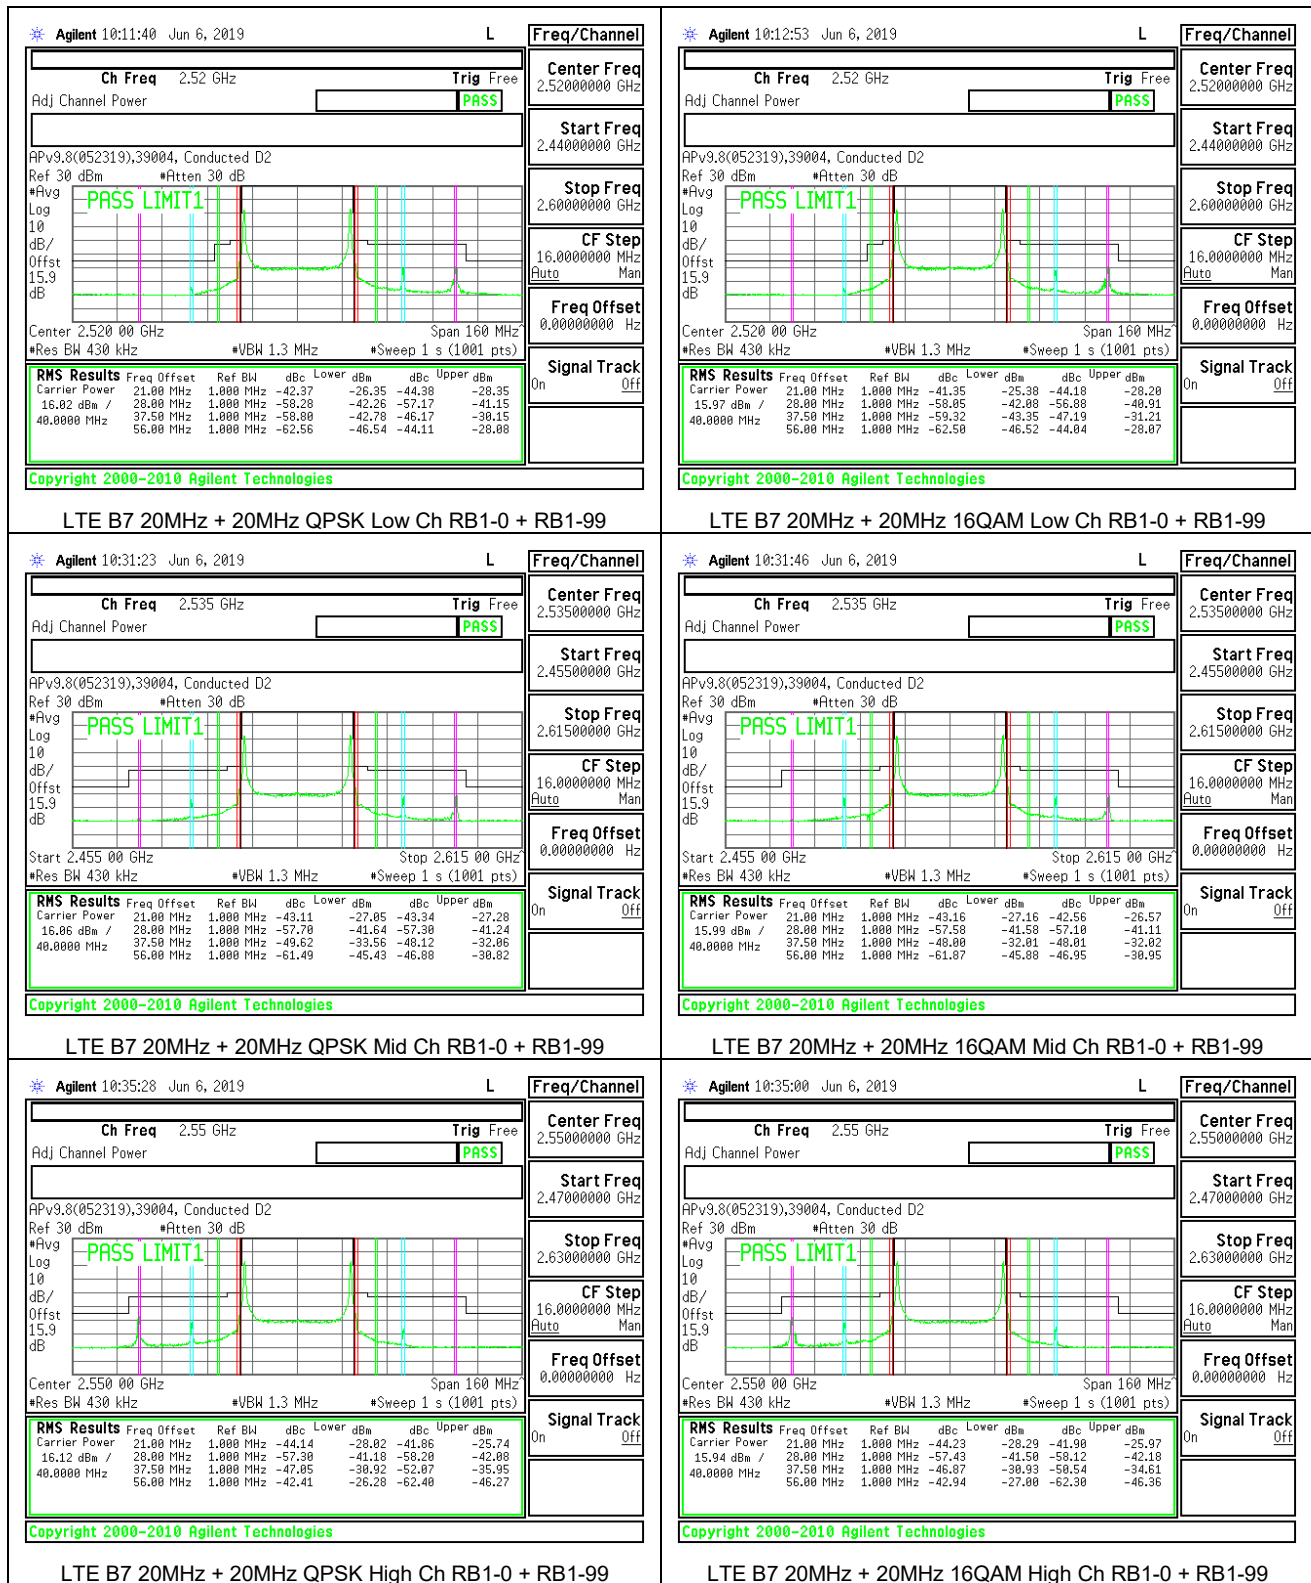


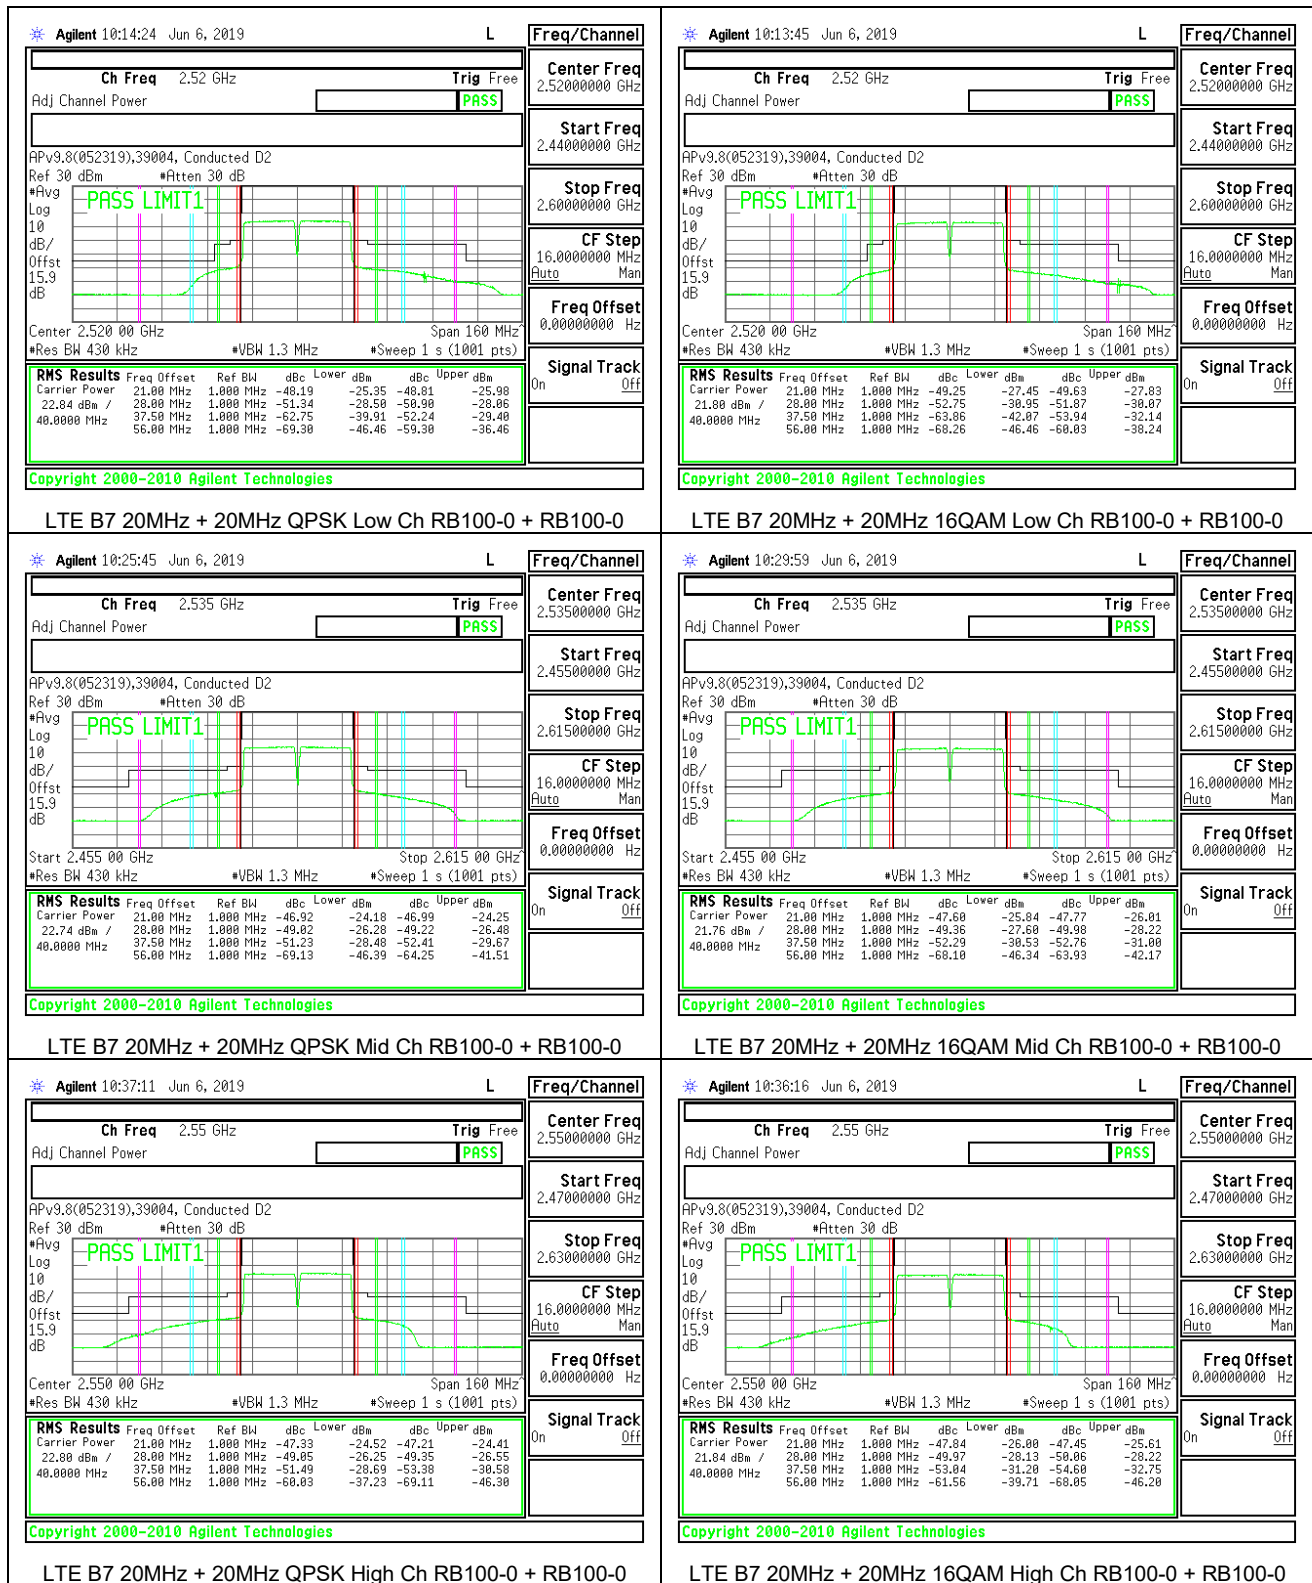


8.2.3. LTE BAND 41

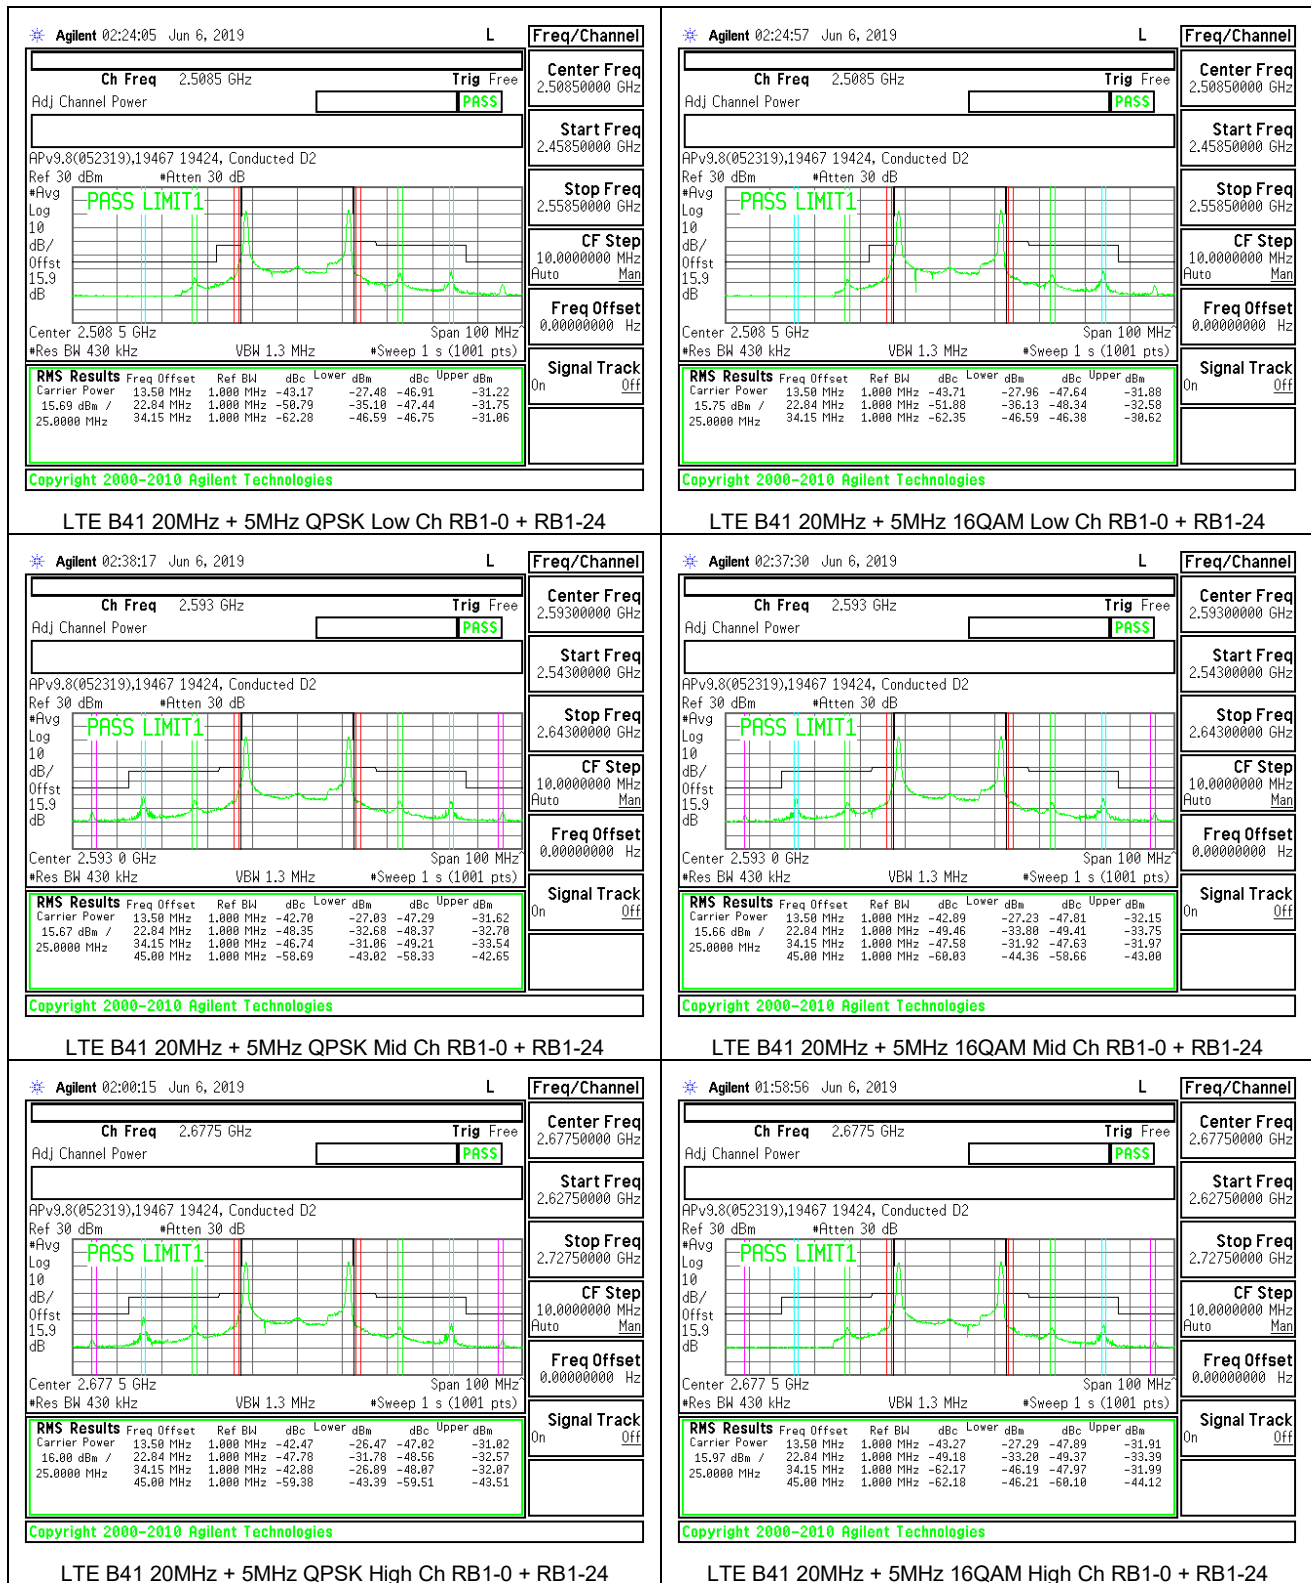

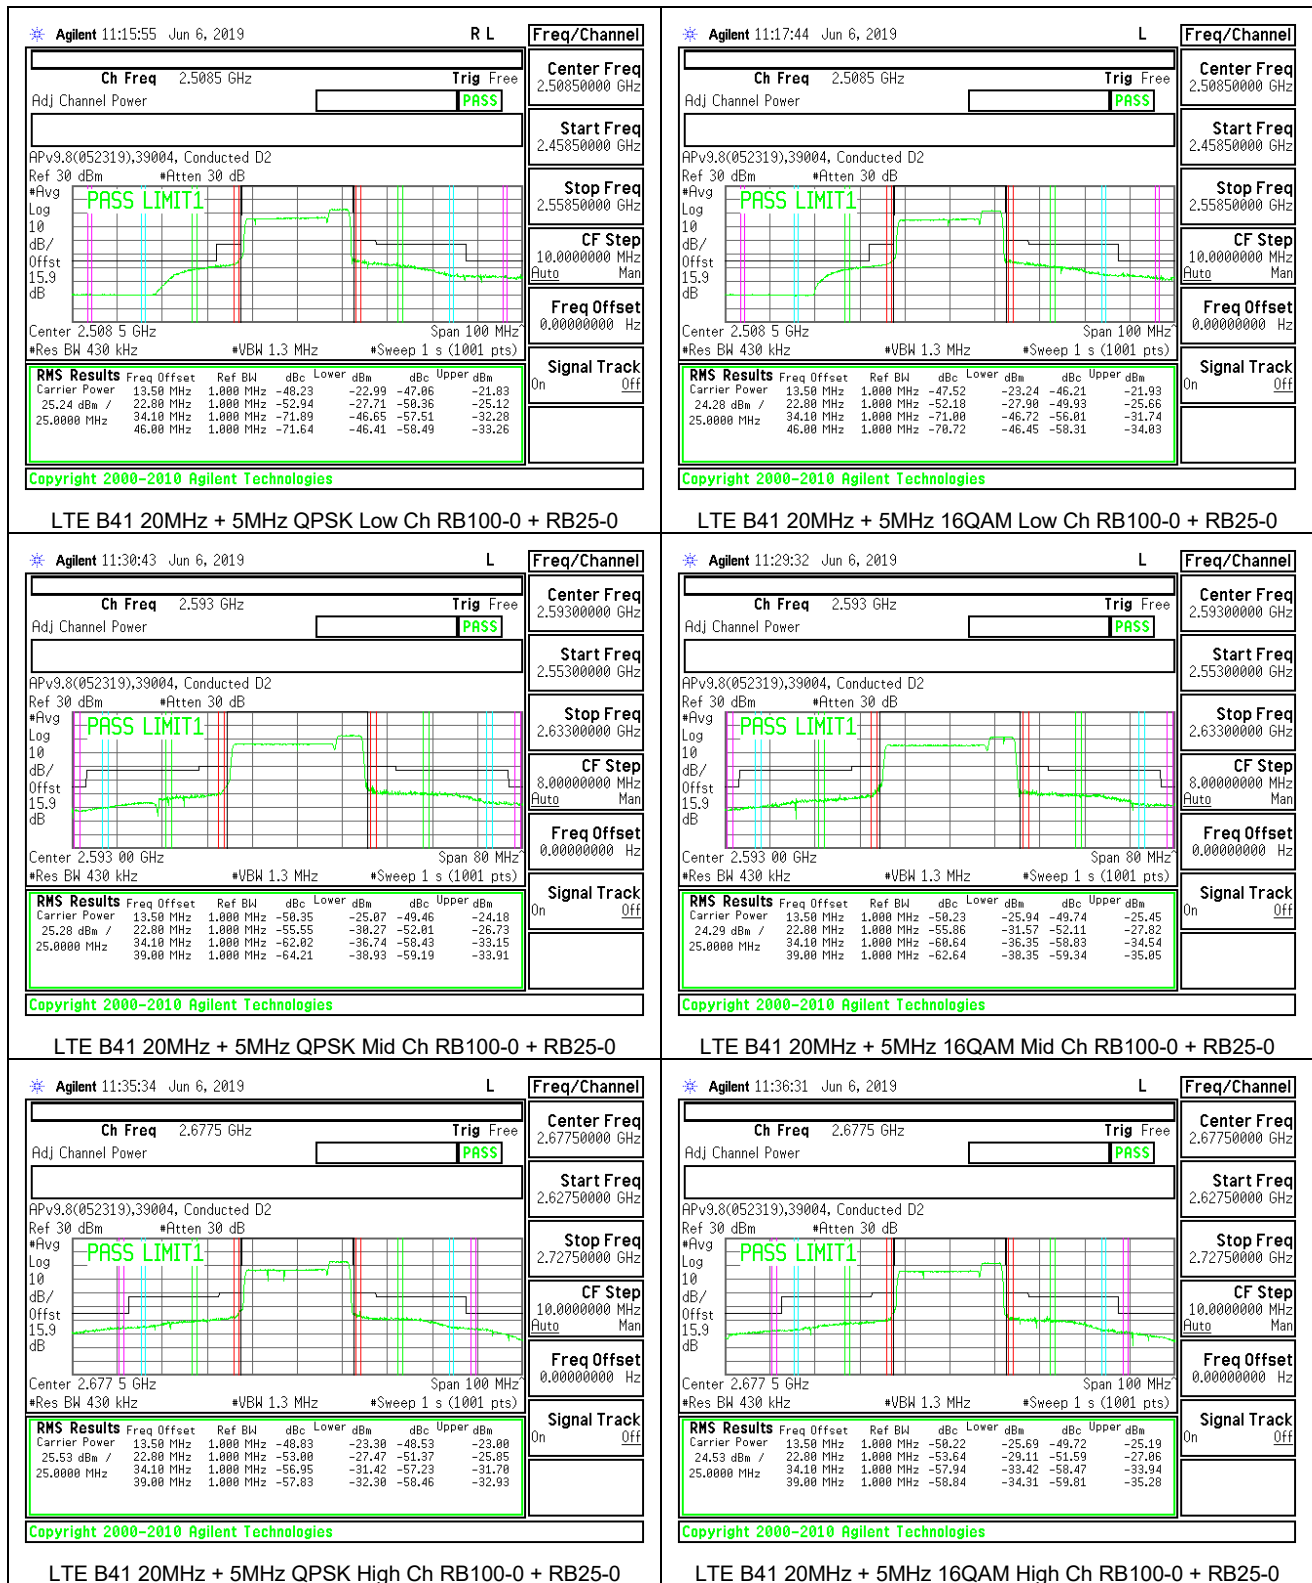

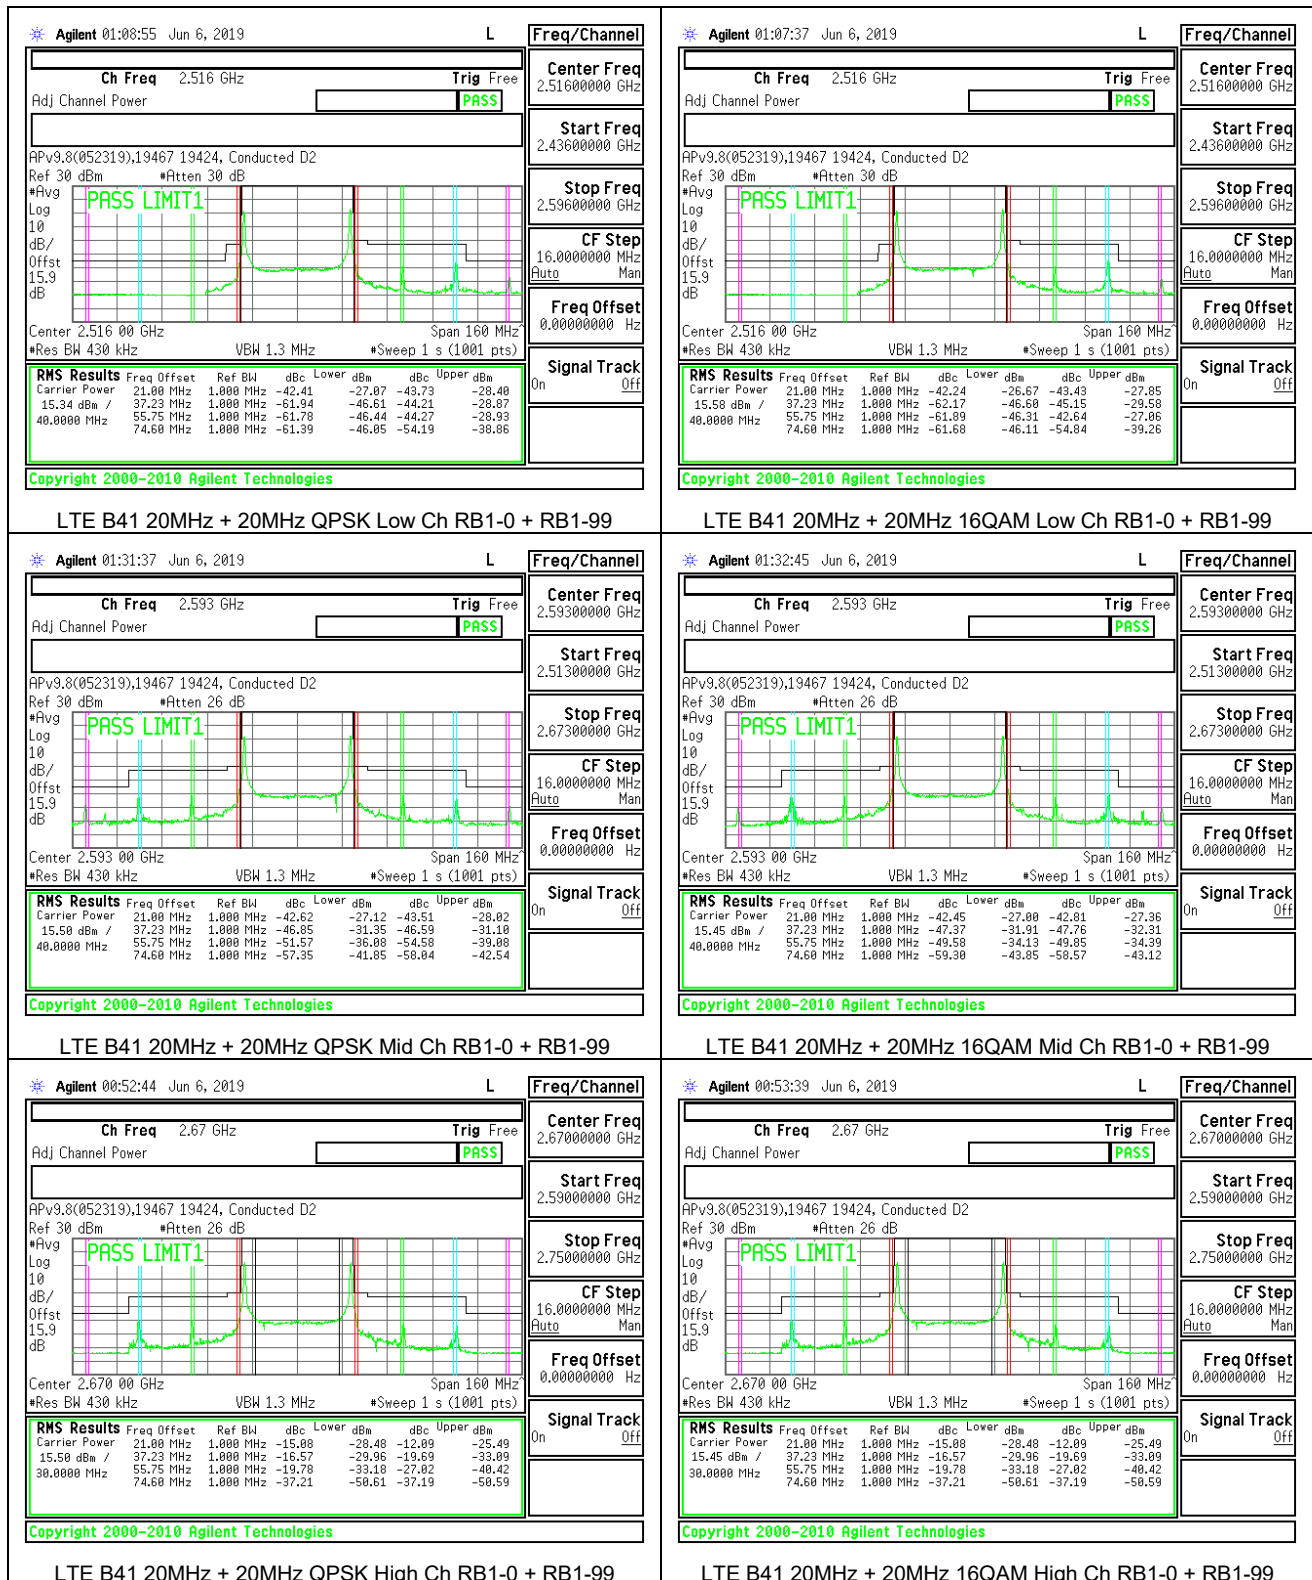

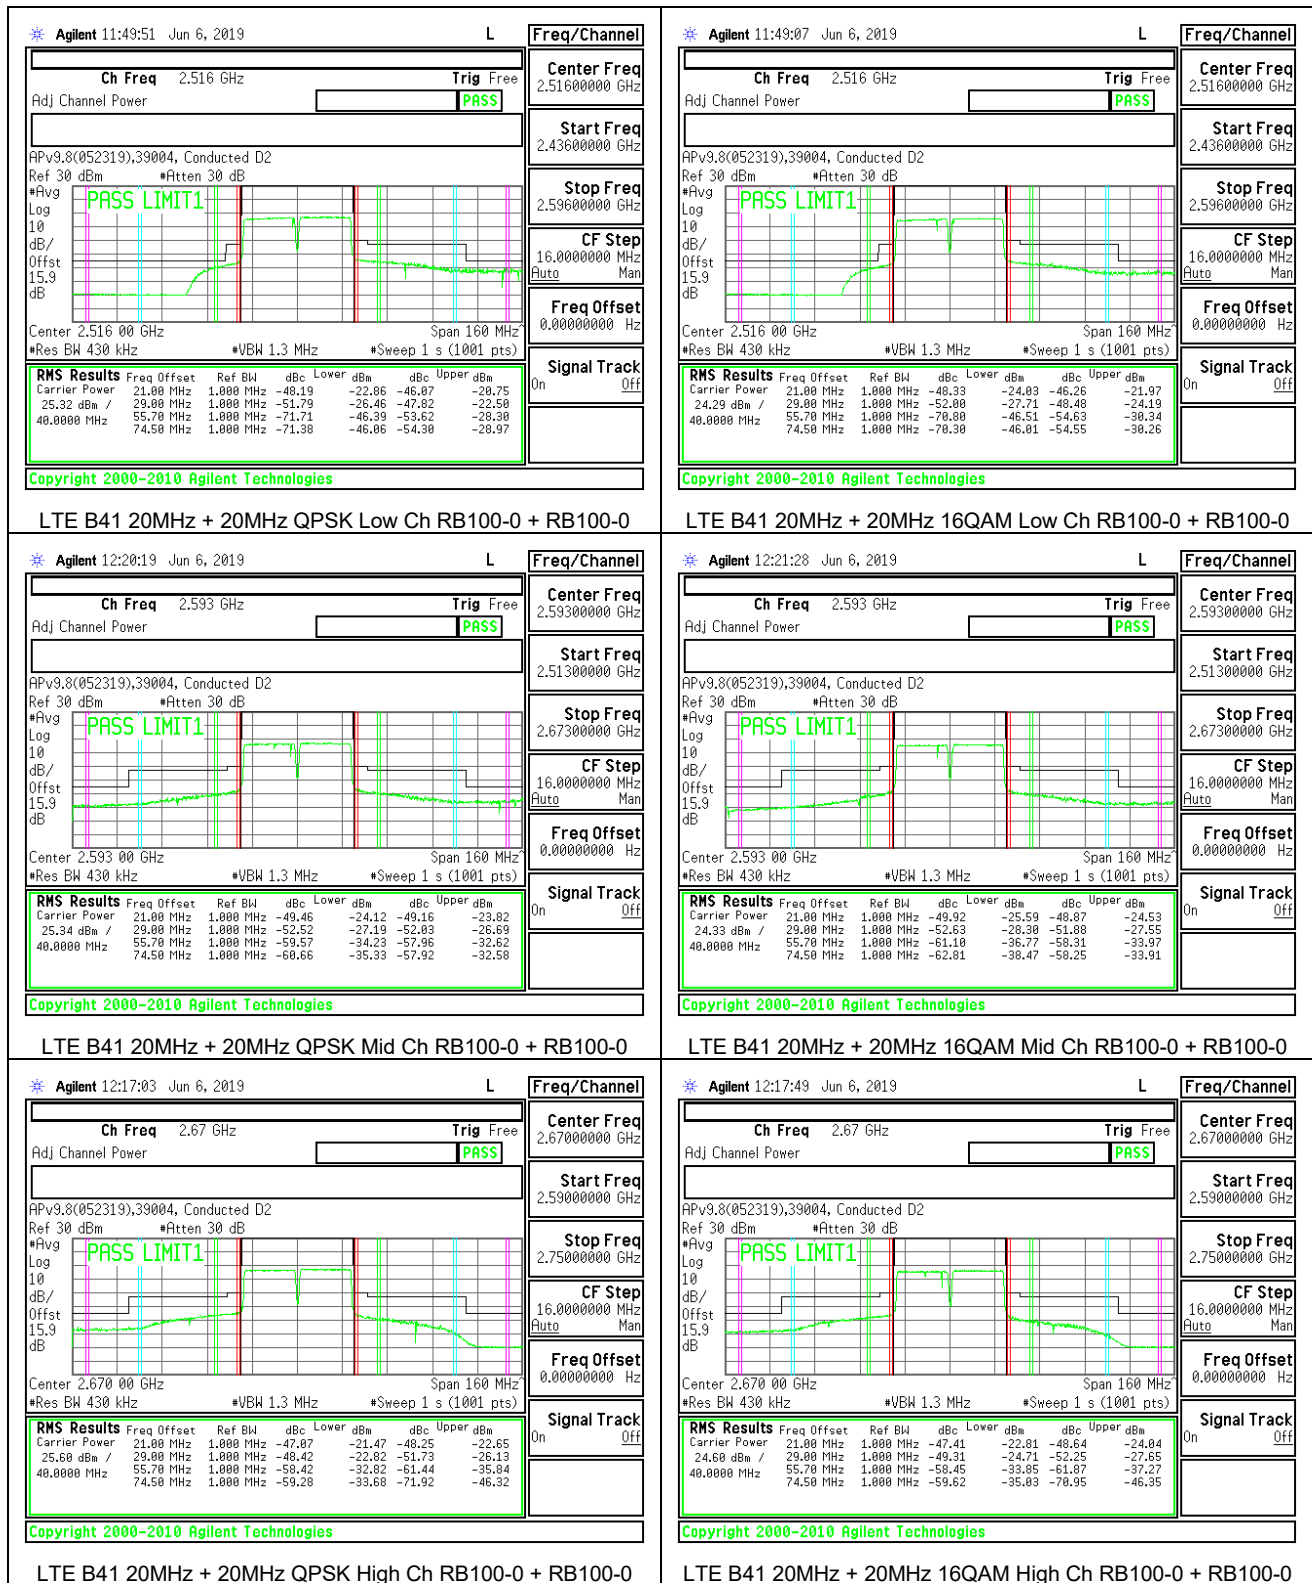

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917, §27.53

LIMITS

FCC: §22.917

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

FCC: §27.53 (m)

The minimum permissible attenuation level of any spurious emissions is $55 + 10 \log (P)$ dB where transmitting power (P) in Watts.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13dBm or -25 dBm according to the band Limit
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.
(NOTE: Worst case set RBW/VBW to 1MHz/3MHz)

MODES TESTED

- LTE Band 5
- LTE Band 7
- LTE Band 41


8.3.1. LTE BAND 5



LTE B5 5MHz + 3MHz QPSK Low Ch RB1-24 + RB1-0




LTE B5 5MHz + 3MHz 16QAM Low Ch RB1-24 + RB1-0

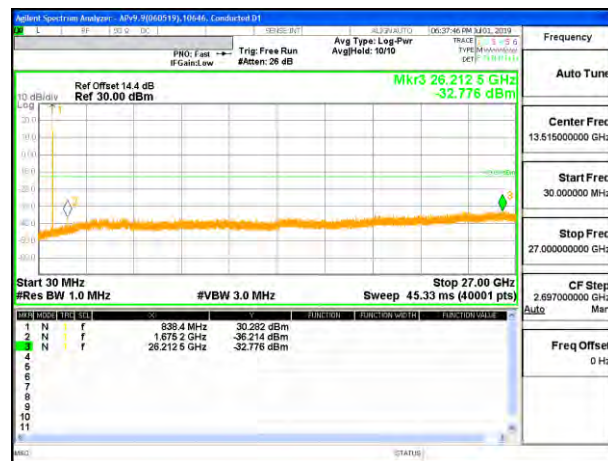

LTE B5 5MHz + 3MHz QPSK Middle Ch RB1-24 + RB1-0




LTE B5 5MHz + 3MHz 16QAM Middle Ch RB1-24 + RB1-0

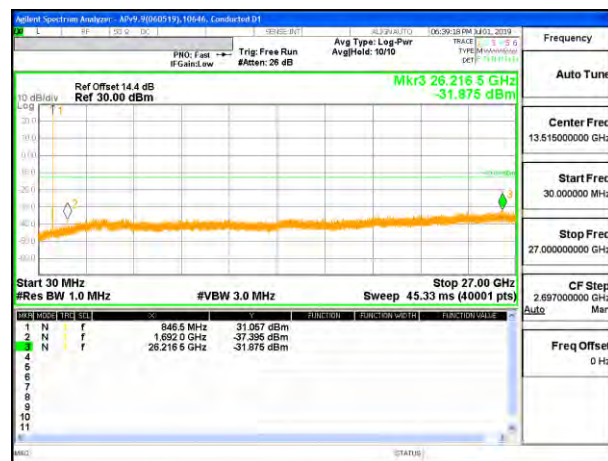

LTE B5 5MHz + 3MHz QPSK High Ch RB1-24 + RB1-0




LTE B5 5MHz + 3MHz 16QAM High Ch RB1-24 + RB1-0

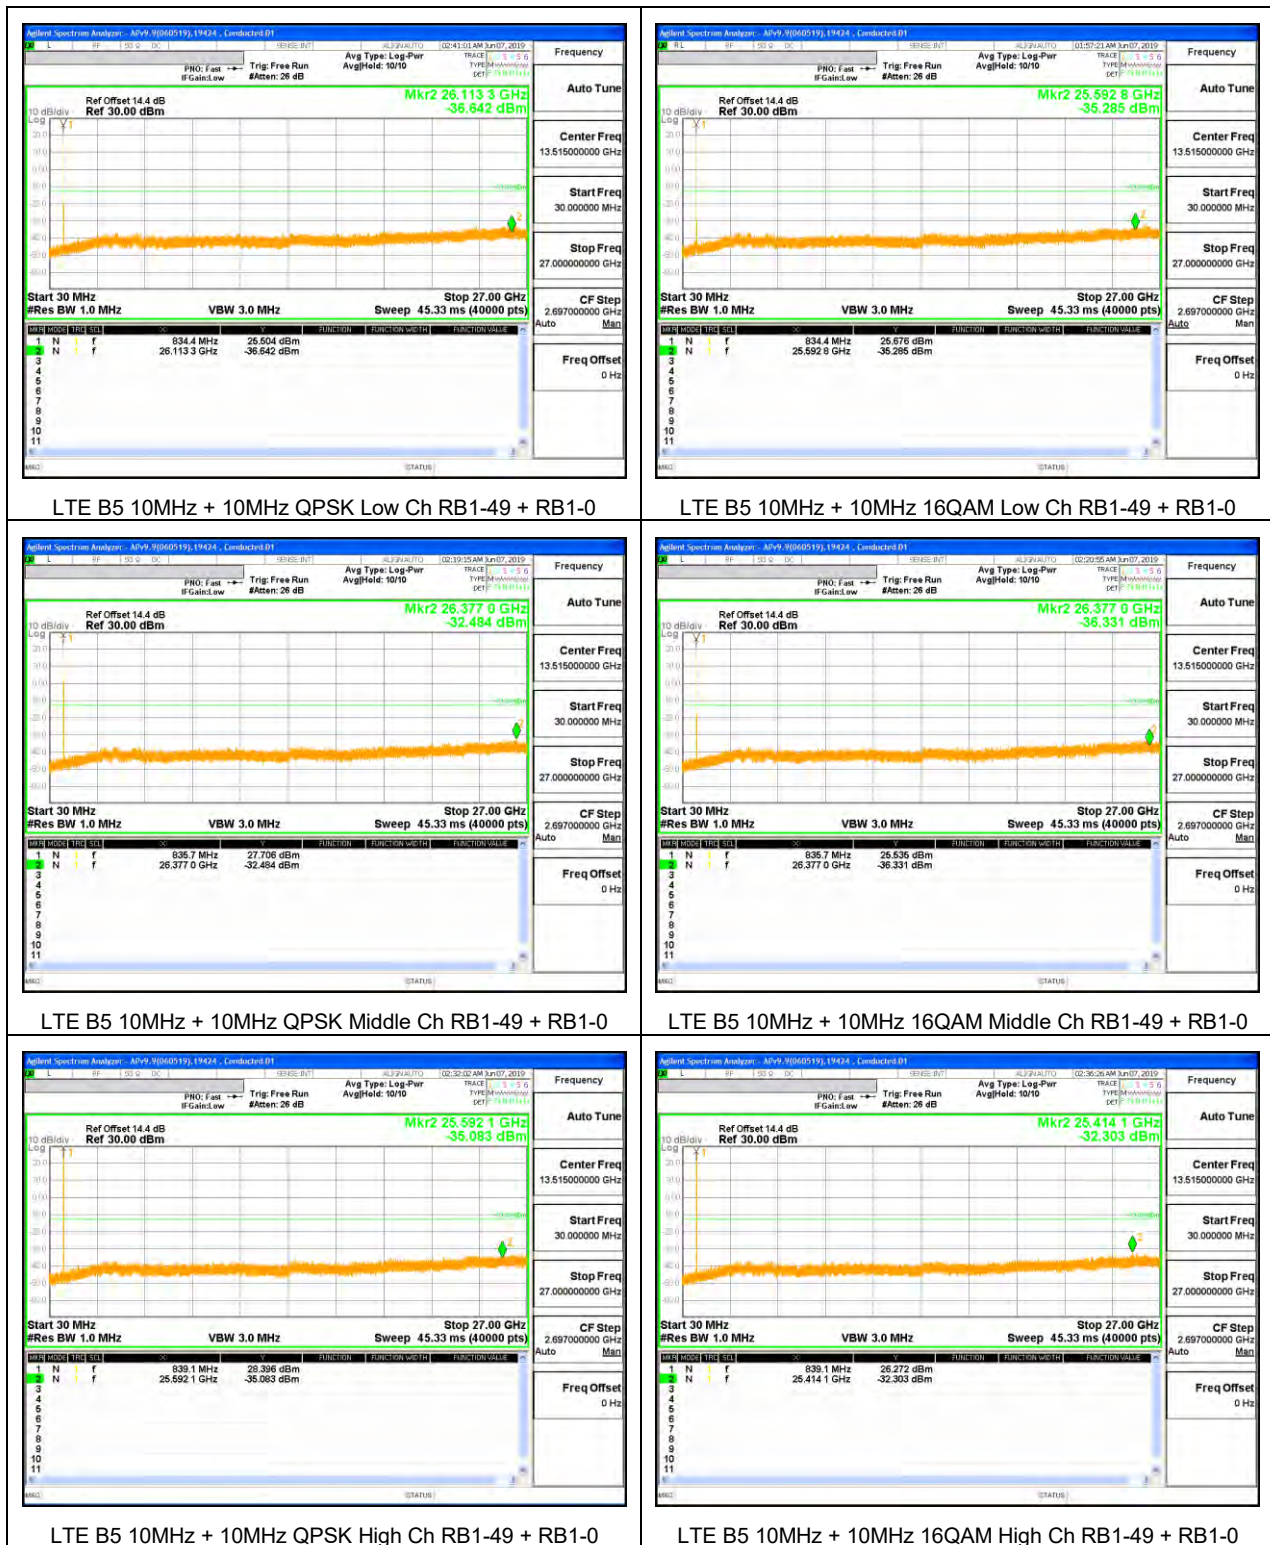

8.3.2. LTE BAND 7




LTE B7 20MHz + 10MHz QPSK Low Ch RB1-99 + RB1-0

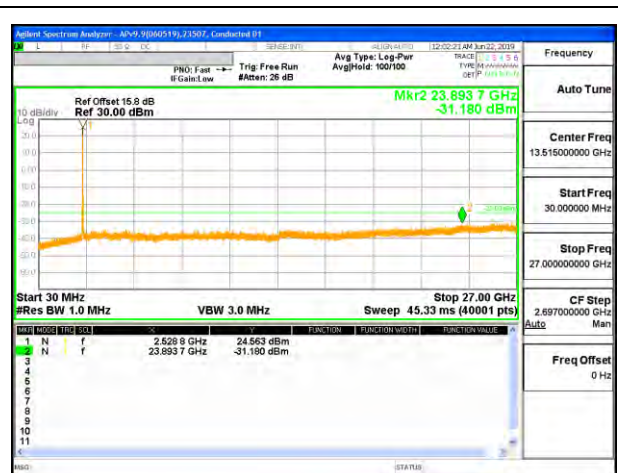

LTE B7 20MHz + 10MHz 16QAM Low Ch RB1-99 + RB1-0




LTE B7 20MHz + 10MHz QPSK Middle Ch RB1-99 + RB1-0

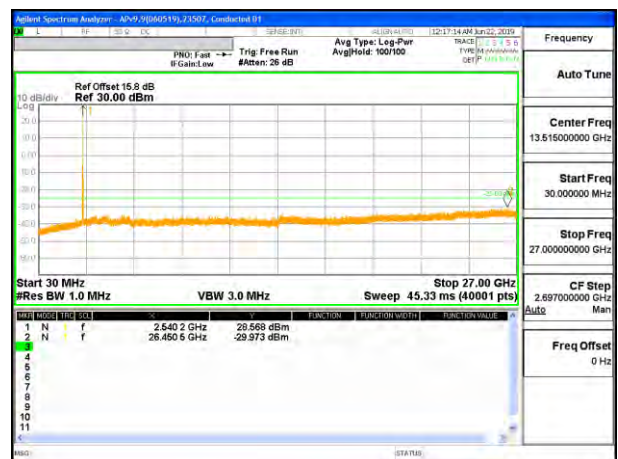

LTE B7 20MHz + 10MHz 16QAM Middle Ch RB1-99 + RB1-0



LTE B7 20MHz + 10MHz QPSK High Ch RB1-99 + RB1-0

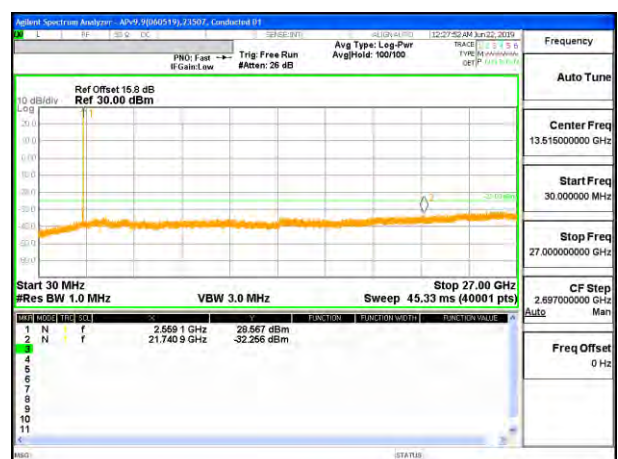

LTE B7 20MHz + 10MHz 16QAM High Ch RB1-99 + RB1-0



8.3.3. LTE BAND 41





8.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §27.54

LIMITS

FCC: §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC: §22.355

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30°C to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)
Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.
End Voltage, 3.2VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- LTE Band 5
- LTE Band 7
- LTE Band 41

RESULTS

See the following pages.

8.4.1. LTE BAND 5

ID:	38602	Date:	5/20/19
------------	-------	--------------	---------

QPSK, (10MHz + 5MHz BANDWIDTH)

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm	F high @ -13dBm		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	824.6086	848.3825		
Extreme (50C)		824.6086	848.3825	30.4	0.036
Extreme (40C)		824.6086	848.3825	21.2	0.025
Extreme (30C)		824.6086	848.3825	12.7	0.015
Extreme (10C)		824.6086	848.3825	14.4	0.017
Extreme (0C)		824.6086	848.3825	7.2	0.009
Extreme (-10C)		824.6086	848.3825	-3.9	-0.005
Extreme (-20C)		824.6086	848.3825	-9.5	-0.011
Extreme (-30C)		824.6086	848.3825	-16.3	-0.019
20C	15%	824.6086	848.3825	24.2	0.029
	-15%	824.6086	848.3825	-7.7	-0.009
	End Point	824.6086	848.3825	-17.3	-0.021

QPSK, (10MHz + 10MHz BANDWIDTH)

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	824.5477	848.3472		
Extreme (50C)		824.5477	848.3472	28.5	0.034
Extreme (40C)		824.5477	848.3472	22.8	0.027
Extreme (30C)		824.5477	848.3472	17.4	0.021
Extreme (10C)		824.5477	848.3472	23.9	0.029
Extreme (0C)		824.5477	848.3472	11.8	0.014
Extreme (-10C)		824.5477	848.3472	-1.2	-0.001
Extreme (-20C)		824.5477	848.3472	-16.6	-0.020
Extreme (-30C)		824.5477	848.3472	-19.1	-0.023
20C	15%	824.5477	848.3472	23.9	0.029
	-15%	824.5477	848.3472	-7.2	-0.009
	End Point	824.5477	848.3472	-18.8	-0.022

8.4.2. LTE BAND 7

ID:	31300	Date:	5/20/19
-----	-------	-------	---------

QPSK, (20MHz + 10MHz BANDWIDTH)

Limit		2500	2570	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm	F high @ -13dBm		
Temperature	Voltage				
Normal (20C)	Normal	2500.5880	2569.4660		
Extreme (50C)		2500.5880	2569.4660	37.3	0.015
Extreme (40C)		2500.5880	2569.4660	19.3	0.008
Extreme (30C)		2500.5880	2569.4660	24.8	0.010
Extreme (10C)		2500.5880	2569.4660	28.6	0.011
Extreme (0C)		2500.5880	2569.4660	32.4	0.013
Extreme (-10C)		2500.5880	2569.4660	-16.8	-0.007
Extreme (-20C)		2500.5880	2569.4660	-21.5	-0.008
Extreme (-30C)		2500.5880	2569.4660	-29.6	-0.012
20C	15%	2500.5880	2569.4660	35.2	0.014
	-15%	2500.5880	2569.4660	27.5	0.011
	End Point	2500.5880	2569.4660	27.9	0.011

QPSK, (20MHz + 20MHz BANDWIDTH)

Limit		2500	2570	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2500.6200	2569.3760		
Extreme (50C)		2500.6200	2569.3760	24.9	0.010
Extreme (40C)		2500.6200	2569.3760	53.5	0.021
Extreme (30C)		2500.6200	2569.3760	62.5	0.025
Extreme (10C)		2500.6200	2569.3760	62.0	0.024
Extreme (0C)		2500.6200	2569.3760	33.4	0.013
Extreme (-10C)		2500.6200	2569.3760	20.5	0.008
Extreme (-20C)		2500.6200	2569.3760	-24.0	-0.009
Extreme (-30C)		2500.6200	2569.3760	-58.5	-0.023
20C	15%	2500.6200	2569.3760	47.8	0.019
	-15%	2500.6200	2569.3760	34.5	0.014
	End Point	2500.6200	2569.3760	35.3	0.014

8.4.3. LTE BAND 41

ID:	38602	Date:	5/20/19
-----	-------	-------	---------

QPSK, (20MHz + 5MHz BANDWIDTH)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2496.6250	2689.4680		
Extreme (50C)		2496.6250	2689.4680	13.6	0.005
Extreme (40C)		2496.6250	2689.4680	10.6	0.004
Extreme (30C)		2496.6250	2689.4680	9.9	0.004
Extreme (10C)		2496.6250	2689.4680	7.2	0.003
Extreme (0C)		2496.6250	2689.4680	-1.7	-0.001
Extreme (-10C)		2496.6250	2689.4680	-6.6	-0.003
Extreme (-20C)		2496.6250	2689.4680	-8.4	-0.003
Extreme (-30C)		2496.6250	2689.4680	-8.8	-0.003
20C	15%	2496.6250	2689.4680	10.3	0.004
	-15%	2496.6250	2689.4680	-8.2	-0.003
	End Point	2496.6250	2689.4680	-7.2	-0.003

QPSK, (20MHz + 20MHz BANDWIDTH)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2496.6160	2689.3680		
Extreme (50C)		2496.6160	2689.3680	20.5	0.008
Extreme (40C)		2496.6160	2689.3680	19.9	0.008
Extreme (30C)		2496.6160	2689.3680	8.2	0.003
Extreme (10C)		2496.6160	2689.3680	12.3	0.005
Extreme (0C)		2496.6160	2689.3680	-6.5	-0.003
Extreme (-10C)		2496.6160	2689.3680	-17.1	-0.007
Extreme (-20C)		2496.6160	2689.3680	-22.4	-0.009
Extreme (-30C)		2496.6160	2689.3680	-23.1	-0.009
20C	15%	2496.6160	2689.3680	17.5	0.007
	-15%	2496.6160	2689.3680	-20.2	-0.008
	End Point	2496.6160	2689.3680	-22.7	-0.009

8.5. PEAK-TO-AVERAGE POWER RATIO

LIMIT

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

RESULT

Test was performed on ANT 1 antenna; full resource block (FRB) for each bandwidth was used to measure as the worst case. The results from all CCDF measurements are passed with 13dB peak-to-average ratio criteria.

8.5.1. LTE BAND 5

ID:	10646	Date:	6/6/19
------------	-------	--------------	--------

Band	Bandwidth (MHz)	PCC f (MHz)	SCC1 f (MHz)	Modulation	Conducted Power (dBm)		Peak-to-Average Power Ratio (dB)
					Peak	Average	
Band 5	3MHz / 5MHz	834.1	838.0	QPSK	31.01	23.96	7.05
				16QAM	31.07	23.96	7.11
	5 MHz / 3MHz	835.1	839.0	QPSK	32.76	23.95	8.81
				16QAM	31.32	22.61	8.71
	5MHz / 10MHz	831.8	839.0	QPSK	30.41	21.95	8.46
				16QAM	30.41	20.97	9.44
	10MHz / 5MHz	834.3	841.5	QPSK	30.58	21.89	8.69
				16QAM	30.49	20.91	9.58
10MHz / 10MHz	831.6	841.5	QPSK	30.24	21.88	8.36	
			16QAM	30.20	20.9	9.30	
Duty Cycle Correction Factor (dB) =			0.00				

8.5.2. LTE BAND 7

ID:	10646	Date:	6/6/19
------------	-------	--------------	--------

Band	Bandwidth (MHz)	PCC f (MHz)	SCC1 f (MHz)	Modulation	Conducted Power (dBm)		Peak-to-Average Power Ratio (dB)
					Peak	Average	
Band 7	10MHz / 20MHz	2525.6	2540.0	QPSK	30.65	23.41	7.24
				16QAM	30.48	22.44	8.04
	15 MHz / 15MHz	2527.5	2542.5	QPSK	30.44	23.37	7.07
				16QAM	30.47	22.40	8.07
	15MHz / 20MHz	2525.3	2542.4	QPSK	30.65	23.50	7.15
				16QAM	30.52	22.49	8.03
	20MHz / 10MHz	2530.1	2544.5	QPSK	30.39	23.36	7.03
				16QAM	30.38	22.37	8.01
	20MHz / 15MHz	2527.6	2544.7	QPSK	30.62	23.49	7.13
				16QAM	30.94	22.49	8.45
20MHz / 20MHz	2525.1	2544.9	QPSK	30.86	23.50	7.36	
			16QAM	30.66	22.48	8.18	
Duty Cycle Correction Factor (dB) =			0.00				
Peak-to-Average Power Ratio= Peak Reading - Average Reading - Duty Cycle Correction Factor							

8.5.3. LTE BAND 41

ID:	10646	Date:	6/6/19
------------	-------	--------------	--------

Band	Bandwidth (MHz)	PCC f (MHz)	SCC1 f (MHz)	Modulation	Conducted Power (dBm)		Peak-to-Average Power Ratio (dB)
					Peak	Average	
Band 41 (FCC)	5MHz / 20MHz	2583.8	2595.5	QPSK	32.92	17.94	7.99
				16QAM	32.91	16.96	8.96
	10MHz / 20MHz	2583.6	2598.0	QPSK	32.84	17.86	7.99
				16QAM	32.39	16.90	8.50
	15MHz / 15MHz	2585.5	2600.5	QPSK	32.83	17.89	7.95
				16QAM	32.92	16.95	8.98
	15MHz / 20MHz	2583.3	2600.4	QPSK	32.95	18.00	7.96
				16QAM	32.81	17.03	8.79
	20MHz / 5MHz	2590.5	2602.2	QPSK	32.62	17.96	7.67
				16QAM	32.40	16.91	8.50
	20MHz / 10MHz	2588.1	2602.5	QPSK	32.92	17.90	8.03
				16QAM	32.76	16.95	8.82
	20MHz / 15MHz	2585.6	2602.7	QPSK	32.83	17.99	7.85
				16QAM	32.83	17.03	8.81
	20MHz / 20MHz	2583.1	2602.9	QPSK	32.72	17.99	7.74
				16QAM	32.71	16.98	8.74
Duty Cycle Correction Factor (dB) =			6.99				
Peak-to-Average Power Ratio= Peak Reading - Average Reading - Duty Cycle Correction Factor							

9. RADIATED TEST RESULTS

9.1. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 1

RULE PART(S)

FCC: §2.1053, §22.917, §27.53

LIMIT

FCC: §27.53 (m)

At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

FCC: §22.917(a),

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

KDB 971168 D01/D02 v02r01

MODES TESTED

- LTE Band 5
- LTE Band 7
- LTE Band 41

9.1.1. LTE BAND 5

Company:	
Project #:	12696945
Date:	5/24/19
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 5 QPSK 10MHz + 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 829MHz + 838.9MHz									
1.65	-65.54	Pk	28.6	-32.3	11.2	-58.04	-13	-45.04	V
1.658	-65.63	Pk	28.7	-32.5	12.3	-57.13	-13	-44.13	H
2.47	-65.89	Pk	32.7	-31.5	11.2	-53.49	-13	-40.49	V
2.483	-66.73	Pk	32.7	-31.5	11.1	-54.43	-13	-41.43	H
3.326	-68.14	Pk	32.8	-30.2	10.9	-54.64	-13	-41.64	H
3.342	-67.72	Pk	32.8	-30.3	11	-54.22	-13	-41.22	V
Mid Channel, 831.6MHz + 841.5MHz									
1.661	-65.69	Pk	28.8	-32.4	12.2	-57.09	-13	-44.09	H
2.492	-67.84	Pk	32.7	-31.5	11.2	-55.44	-13	-42.44	H
1.662	-65.55	Pk	28.8	-32.4	11.6	-57.55	-13	-44.55	V
2.495	-67.79	Pk	32.7	-31.6	11.9	-54.79	-13	-41.79	V
3.307	-66.97	Pk	32.8	-30.3	10.9	-53.57	-13	-40.57	V
3.319	-67.67	Pk	32.8	-30.2	11.2	-53.87	-13	-40.87	H
High Channel, 834.1MHz + 844MHz									
1.675	-66.38	Pk	28.9	-32.4	12.4	-57.48	-13	-44.48	H
2.498	-66.85	Pk	32.7	-31.5	11.4	-54.25	-13	-41.25	H
3.334	-68.3	Pk	32.9	-30.1	10.7	-54.8	-13	-41.8	H
1.664	-65.1	Pk	28.7	-32.4	11.6	-57.2	-13	-44.2	V
2.485	-67.57	Pk	32.7	-31.5	11.6	-54.77	-13	-41.77	V
3.324	-67.35	Pk	32.8	-30.2	10.9	-53.85	-13	-40.85	V

Pk - Peak detector

Company:	
Project #:	12696945
Date:	5/24/19
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 5 16QAM 10MHz + 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 829MHz + 838.9MHz									
1.664	-65.53	Pk	28.7	-32.4	12.3	-56.93	-13	-43.93	H
1.658	-65.2	Pk	28.7	-32.5	11.7	-57.3	-13	-44.3	V
2.483	-66.76	Pk	32.7	-31.5	11.1	-54.46	-13	-41.46	H
2.483	-66.39	Pk	32.7	-31.5	11.5	-53.69	-13	-40.69	V
3.317	-67.48	Pk	32.8	-30.2	11.3	-53.58	-13	-40.58	H
3.325	-67.42	Pk	32.8	-30.2	10.9	-53.92	-13	-40.92	V
Mid Channel, 831.5MHz + 841.4MHz									
2.491	-67.15	Pk	32.7	-31.5	11	-54.95	-13	-41.95	H
2.49	-67.8	Pk	32.7	-31.5	11.5	-55.1	-13	-42.1	V
1.657	-65.36	Pk	28.7	-32.5	11.7	-57.46	-13	-44.46	V
1.658	-65.25	Pk	28.7	-32.5	12.3	-56.75	-13	-43.75	H
3.317	-66.91	Pk	32.8	-30.2	11.3	-53.01	-13	-40.01	H
3.321	-67.27	Pk	32.8	-30.2	10.9	-53.77	-13	-40.77	V
High Channel, 834.1MHz + 844MHz									
1.668	-65.89	Pk	28.8	-32.4	12.6	-56.89	-13	-43.89	H
3.338	-67.93	Pk	32.8	-30.2	10.7	-54.63	-13	-41.63	H
1.671	-65.27	Pk	28.8	-32.3	11.6	-57.17	-13	-44.17	V
2.496	-67.51	Pk	32.7	-31.6	11.9	-54.51	-13	-41.51	V
2.505	-67.98	Pk	32.8	-31.4	11.3	-55.28	-13	-42.28	H
3.325	-67.62	Pk	32.8	-30.2	10.9	-54.12	-13	-41.12	V

Pk - Peak detector

9.1.2. LTE BAND 7

Company:	
Project #:	12696945
Date:	5/24/19
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 7 QPSK 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2510MHz + 2529.8MHz									
4.496	-66.26	Pk	33.6	-29	11.3	-50.36	-25	-25.36	H
4.506	-66.99	Pk	33.6	-29	11.1	-51.29	-25	-26.29	V
7.422	-70.92	Pk	35.6	-24.5	10.8	-49.02	-25	-24.02	H
7.431	-71.09	Pk	35.5	-24.6	11.2	-48.99	-25	-23.99	V
10.208	-72.16	Pk	37.3	-21.5	9.7	-46.66	-25	-21.66	H
10.23	-72.46	Pk	37.4	-21.6	10.3	-46.36	-25	-21.36	V
Mid Channel, 2525.1MHz + 2544.9MHz									
5.054	-68.14	Pk	34.2	-28.5	11.1	-51.34	-25	-26.34	H
7.57	-71.83	Pk	35.7	-24.3	10.7	-49.73	-25	-24.73	H
5.024	-67.83	Pk	34.1	-28.9	10.6	-52.03	-25	-27.03	V
7.586	-71.09	Pk	35.7	-24.4	10.7	-49.09	-25	-24.09	V
10.037	-72.3	Pk	37.2	-22.1	10.7	-46.5	-25	-21.50	V
10.071	-72.53	Pk	37.3	-21.9	10	-47.13	-25	-22.13	H
High Channel, 2540.2MHz + 2560MHz									
4.999	-67.16	Pk	34.1	-28.5	10.6	-50.96	-25	-25.96	H
7.697	-70.22	Pk	35.8	-24.6	11.1	-47.92	-25	-22.92	H
4.991	-67.09	Pk	34.1	-28.5	10.9	-50.59	-25	-25.59	V
7.545	-70.75	Pk	35.7	-24.4	10.9	-48.55	-25	-23.55	V
10.179	-71.19	Pk	37.3	-21.4	10.7	-44.59	-25	-19.59	V
10.181	-72.3	Pk	37.3	-21.5	10.5	-46	-25	-21.00	H

Pk - Peak detector

Company:	
Project #:	12696945
Date:	5/24/19
Test Engineer:	39006
Configuration:	EUT
Mode:	LTE 7 16QAM 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2510MHz + 2529.8MHz									
5.105	-67.15	Pk	34.2	-28.4	11.3	-50.05	-25	-25.05	V
5.109	-67.06	Pk	34.1	-28.3	11.3	-49.96	-25	-24.96	H
7.244	-70.29	Pk	35.5	-25	11.2	-48.59	-25	-23.59	V
7.254	-70.84	Pk	35.5	-24.9	10.7	-49.54	-25	-24.54	H
10.279	-72.78	Pk	37.4	-21.4	10.2	-46.58	-25	-21.58	V
10.29	-72.45	Pk	37.5	-21.5	10.2	-46.25	-25	-21.25	H
Mid Channel, 2525.1MHz + 2544.9MHz									
5	-63.1	Pk	34.1	-28.6	10.7	-46.9	-25	-21.90	H
7.69	-71.04	Pk	35.7	-24.5	11.1	-48.74	-25	-23.74	H
4.987	-67.76	Pk	34.1	-28.6	10.8	-51.46	-25	-26.46	V
7.675	-70.81	Pk	35.8	-24.5	11.4	-48.11	-25	-23.11	V
10.223	-71.48	Pk	37.3	-21.6	9.9	-45.88	-25	-20.88	H
10.249	-71.98	Pk	37.4	-21.5	10.1	-45.98	-25	-20.98	V
High Channel, 2540.2MHz + 2560MHz									
5.901	-68.8	Pk	34.9	-27.2	10.8	-50.3	-25	-25.30	H
5.904	-68.2	Pk	34.9	-27.1	11.1	-49.3	-25	-24.30	V
7.656	-70.55	Pk	35.6	-24.5	11.1	-48.35	-25	-23.35	V
7.661	-69.5	Pk	35.6	-24.6	10.9	-47.6	-25	-22.60	H
10.809	-72.79	Pk	37.9	-20.8	10.5	-45.19	-25	-20.19	H
10.811	-72.69	Pk	37.9	-20.8	10.6	-44.99	-25	-19.99	V

Pk - Peak detector

9.1.3. LTE BAND 41

Company:	
Project #:	12696945
Date:	5/22/19
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 41 QPSK 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2506MHz + 2525.8MHz									
4.995	-66.93	Pk	34.1	-28.4	10.8	-50.43	-25	-25.43	H
7.501	-71.54	Pk	35.5	-24.5	10.7	-49.84	-25	-24.84	H
4.982	-67.77	Pk	34.1	-28.4	10.8	-51.27	-25	-26.27	V
7.479	-70.7	Pk	35.5	-24.6	10.8	-49	-25	-24.00	V
10.005	-72.94	Pk	36.9	-22.2	10.7	-47.54	-25	-22.54	V
10.006	-72.1	Pk	36.9	-22.2	10.5	-46.9	-25	-21.90	H
Mid Channel, 2583.1MHz + 2602.9MHz									
3.9	-64.47	Pk	33.4	-29.4	11	-49.47	-25	-24.47	H
4.501	-65.52	Pk	33.6	-29.1	11.8	-49.22	-25	-24.22	V
6.435	-69.46	Pk	35.4	-26.2	10.9	-49.36	-25	-24.36	V
6.931	-69.32	Pk	35.6	-25.1	10.7	-48.12	-25	-23.12	H
9.041	-69.31	Pk	36	-23.7	11.1	-45.91	-25	-20.91	H
12.209	-71.77	Pk	38.7	-20.7	10.5	-43.27	-25	-18.27	V
High Channel, 2660.2MHz + 2680MHz									
10.647	-72.99	Pk	37.9	-21.1	10.1	-46.09	-25	-21.09	H
10.666	-72.9	Pk	37.9	-21.1	10.8	-45.3	-25	-20.30	V
5.303	-67.94	Pk	34.4	-27.8	10.9	-50.44	-25	-25.44	H
5.327	-70	Pk	34.4	-28.1	11	-52.7	-25	-27.70	V
7.987	-71.11	Pk	35.7	-24.3	11.3	-48.41	-25	-23.41	H
8.014	-69.86	Pk	35.6	-24.1	11.3	-47.06	-25	-22.06	V

Pk - Peak detector

Company:	
Project #:	12696945
Date:	5/22/19
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 41 16QAM 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2506MHz + 2525.8MHz									
5.002	-68.07	Pk	34.1	-28.6	10.8	-51.77	-25	-26.77	H
7.518	-77.05	Pk	35.6	-24.5	10.4	-55.55	-25	-30.55	H
5.012	-68.03	Pk	34.1	-28.9	10.3	-52.53	-25	-27.53	V
7.518	-71.41	Pk	35.6	-24.5	10.7	-49.61	-25	-24.61	V
10.008	-72.81	Pk	36.9	-22.2	10.6	-47.51	-25	-22.51	V
10.018	-72.32	Pk	36.9	-22.2	10.4	-47.22	-25	-22.22	H
Mid Channel, 2583.1MHz + 2602.9MHz									
4.743	-66.81	Pk	33.9	-28.2	10.8	-50.31	-25	-25.31	H
5.168	-66.08	Pk	34.2	-28.5	11.6	-48.78	-25	-23.78	V
6.51	-67.96	Pk	35.6	-26	11.4	-46.96	-25	-21.96	V
7.121	-69.78	Pk	35.6	-25.1	10.6	-48.68	-25	-23.68	H
8.941	-69.81	Pk	36	-23.8	11.3	-46.31	-25	-21.31	H
10.976	-71.12	Pk	37.9	-21.1	10.9	-43.42	-25	-18.42	V
High Channel, 2660.2MHz + 2680MHz									
10.641	-72.67	Pk	38	-21.2	10	-45.87	-25	-20.87	H
10.644	-72.69	Pk	37.9	-21.2	10.4	-45.59	-25	-20.59	V
5.311	-69.88	Pk	34.4	-27.9	10.7	-52.68	-25	-27.68	H
5.322	-70.66	Pk	34.5	-28	10.5	-53.66	-25	-28.66	V
7.962	-70.59	Pk	35.6	-24.2	11.1	-48.09	-25	-23.09	V
7.971	-70.69	Pk	35.6	-24.3	11.2	-48.19	-25	-23.19	H

Pk - Peak detector

9.2. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 2

9.2.1. LTE BAND 5

Company:	
Project #:	12696945
Date:	5/24/2019
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 5 QPSK 10MHz + 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 829MHz + 838.9MHz									
2.492	-67.39	Pk	32.7	-31.5	11.1	-55.09	-13	-42.09	H
1.654	-65.94	Pk	28.7	-32.4	11.5	-58.14	-13	-45.14	V
1.66	-65.72	Pk	28.7	-32.4	12.3	-57.12	-13	-44.12	H
2.483	-65.99	Pk	32.7	-31.5	11.5	-53.29	-13	-40.29	V
3.302	-67.18	Pk	32.9	-30.4	11.1	-53.58	-13	-40.58	V
3.315	-67.25	Pk	32.8	-30.2	11.4	-53.25	-13	-40.25	H
Mid Channel, 831.6MHz + 841.5MHz									
1.681	-65.44	Pk	28.9	-32.4	12.1	-56.84	-13	-43.84	H
1.676	-65.45	Pk	28.9	-32.4	11	-57.95	-13	-44.95	V
3.337	-70.24	Pk	32.8	-30.2	11	-56.64	-13	-43.64	V
2.509	-66.35	Pk	32.6	-31.4	11.5	-53.65	-13	-40.65	V
2.525	-66.7	Pk	32.6	-31.5	12	-53.6	-13	-40.6	H
3.359	-73.18	Pk	32.8	-30.2	11	-59.58	-13	-46.58	H
High Channel, 834.1MHz + 844MHz									
1.671	-65.62	Pk	28.9	-32.3	12.7	-56.32	-13	-43.32	H
3.337	-66.88	Pk	32.8	-30.2	10.7	-53.58	-13	-40.58	H
1.669	-65.97	Pk	28.8	-32.3	11.6	-57.87	-13	-44.87	V
3.354	-67.66	Pk	32.9	-30.1	11.5	-53.36	-13	-40.36	V
2.506	-68.19	Pk	32.8	-31.4	11.3	-55.49	-13	-42.49	H
2.508	-68.19	Pk	32.8	-31.4	11.4	-55.39	-13	-42.39	V

Pk - Peak detector

Company:	
Project #:	12696945
Date:	5/24/2019
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 5 16QAM 10MHz + 10MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 829MHz + 838.9MHz									
2.491	-66.69	Pk	32.7	-31.5	11	-54.49	-13	-41.49	H
2.494	-67.15	Pk	32.7	-31.6	11.8	-54.25	-13	-41.25	V
1.655	-65.08	Pk	28.7	-32.5	12.3	-56.58	-13	-43.58	H
1.658	-65.61	Pk	28.7	-32.5	11.7	-57.71	-13	-44.71	V
3.31	-67.44	Pk	32.8	-30.3	10.9	-54.04	-13	-41.04	V
3.315	-66.93	Pk	32.8	-30.2	11.4	-52.93	-13	-39.93	H
Mid Channel, 831.6MHz + 841.5MHz									
1.676	-65.59	Pk	28.9	-32.4	12.2	-56.89	-13	-43.89	H
1.684	-65.36	Pk	28.9	-32.4	11.1	-57.76	-13	-44.76	V
2.521	-67.29	Pk	32.6	-31.5	11.8	-54.39	-13	-41.39	V
2.522	-66.31	Pk	32.6	-31.5	11.8	-53.41	-13	-40.41	H
3.354	-66.99	Pk	32.8	-30.1	11.5	-52.79	-13	-39.79	V
3.363	-67.02	Pk	32.8	-30.3	11.1	-53.42	-13	-40.42	H
High Channel, 834.1MHz + 844MHz									
1.674	-65.71	Pk	28.9	-32.4	12.6	-56.61	-13	-43.61	H
2.498	-66.1	Pk	32.7	-31.5	11.4	-53.5	-13	-40.5	H
3.351	-67.82	Pk	32.9	-30.1	10.7	-54.32	-13	-41.32	H
1.67	-65.58	Pk	28.8	-32.3	11.6	-57.48	-13	-44.48	V
2.496	-67.57	Pk	32.7	-31.6	11.9	-54.57	-13	-41.57	V
3.344	-68.08	Pk	32.8	-30.2	11	-54.48	-13	-41.48	V

Pk - Peak detector

9.2.2. LTE BAND 7

Company:	
Project #:	12696945
Date:	5/25/2019
Test Engineer:	39006
Configuration:	EUT
Mode:	LTE 7 QPSK 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2510MHz + 2529.8MHz									
5.107	-66.11	Pk	34.2	-28.3	11.3	-48.91	-25	-23.91	H
5.173	-68	Pk	34.2	-28.5	11.4	-50.9	-25	-25.90	V
7.262	-70.54	Pk	35.5	-25	10.5	-49.54	-25	-24.54	H
7.265	-71.33	Pk	35.5	-25	11	-49.83	-25	-24.83	V
11.283	-72.84	Pk	38	-20.8	10.9	-44.74	-25	-19.74	V
11.35	-73.13	Pk	38	-20.3	10.7	-44.73	-25	-19.73	H
Mid Channel, 2525.1MHz + 2544.9MHz									
5.139	-72.77	Pk	34.3	-28.6	11.2	-55.87	-25	-30.87	V
5.146	-71.24	Pk	34.2	-28.6	10.9	-54.74	-25	-29.74	H
7.346	-73.92	Pk	35.6	-24.8	11.1	-52.02	-25	-27.02	V
7.411	-74.01	Pk	35.5	-24.7	10.6	-52.61	-25	-27.61	H
10.199	-74.9	Pk	37.2	-21.6	9.9	-49.4	-25	-24.40	H
10.321	-75.83	Pk	37.6	-21.4	9.9	-49.73	-25	-24.73	V
High Channel, 2540.2MHz + 2560MHz									
5.53	-68.28	Pk	34.7	-27.9	11.2	-50.28	-25	-25.28	H
5.533	-67.46	Pk	34.7	-28	11.5	-49.26	-25	-24.26	V
7.356	-70.76	Pk	35.6	-24.6	10.7	-49.06	-25	-24.06	H
7.361	-70.45	Pk	35.6	-24.6	11.3	-48.15	-25	-23.15	V
9.658	-71	Pk	36.8	-22.2	10.8	-45.6	-25	-20.60	H
9.66	-71.2	Pk	36.8	-22.1	10.9	-45.6	-25	-20.60	V

Pk - Peak detector

Company:	
Project #:	12696945
Date:	5/25/2019
Test Engineer:	39006
Configuration:	EUT
Mode:	LTE 7 16QAM 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2510MHz + 2529.8MHz									
5.107	-67.83	Pk	34.2	-28.3	11.3	-50.63	-25	-25.63	V
5.113	-67.79	Pk	34.2	-28.4	11.3	-50.69	-25	-25.69	H
7.666	-70.56	Pk	35.6	-24.6	11.2	-48.36	-25	-23.36	V
7.716	-69.96	Pk	35.6	-24.5	10.8	-48.06	-25	-23.06	H
10.846	-72.73	Pk	38	-20.2	10.4	-44.53	-25	-19.53	H
10.863	-72.48	Pk	38	-20.7	11.3	-43.88	-25	-18.88	V
Mid Channel, 2525.1MHz + 2544.9MHz									
4.62	-67.58	Pk	34	-28.9	10.7	-51.78	-25	-26.78	H
4.626	-66.44	Pk	33.9	-29	10.5	-51.04	-25	-26.04	V
7.232	-73.72	Pk	35.6	-25.1	11.1	-52.12	-25	-27.12	V
7.297	-69.65	Pk	35.5	-25	10.7	-48.45	-25	-23.45	H
10.824	-72.72	Pk	37.9	-20.6	10.3	-45.12	-25	-20.12	V
10.869	-79.8	Pk	37.9	-20.9	10.8	-52	-25	-27.00	H
High Channel, 2540.2MHz + 2560MHz									
5.032	-68.24	Pk	34.2	-28.8	11.1	-51.74	-25	-26.74	V
5.041	-67.7	Pk	34.2	-28.7	10.9	-51.3	-25	-26.30	H
7.416	-70.12	Pk	35.6	-24.7	11	-48.22	-25	-23.22	V
7.436	-72.58	Pk	35.6	-24.5	11	-50.48	-25	-25.48	H
10.353	-72.64	Pk	37.5	-21.2	10.2	-46.14	-25	-21.14	V
10.436	-72.73	Pk	37.7	-21.6	9.9	-46.73	-25	-21.73	H

Pk - Peak detector

9.2.3. LTE BAND 41

Company:	
Project #:	12696945
Date:	5/22/2019
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 41 QPSK 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2506MHz + 2525.8MHz									
5.003	-68.49	Pk	34.1	-28.6	10.8	-52.19	-25	-27.19	H
7.513	-71.63	Pk	35.6	-24.5	10.5	-50.03	-25	-25.03	H
5.005	-68.78	Pk	34.1	-28.7	10.7	-52.68	-25	-27.68	V
7.494	-71.46	Pk	35.6	-24.5	11	-49.36	-25	-24.36	V
10.007	-72.95	Pk	36.9	-22.2	10.4	-47.85	-25	-22.85	H
10.042	-71.9	Pk	37	-22.1	10.7	-46.3	-25	-21.30	V
Mid Channel, 2583.1MHz + 2602.9MHz									
7.728	-70.59	Pk	35.6	-24.6	11	-48.59	-25	-23.59	H
7.711	-69.24	Pk	35.6	-24.5	11.2	-46.94	-25	-21.94	V
5.151	-68.67	Pk	34.2	-28.6	11.2	-51.87	-25	-26.87	V
5.165	-67.12	Pk	34.2	-28.5	11.6	-49.82	-25	-24.82	H
10.32	-72.07	Pk	37.5	-21.4	9.9	-46.07	-25	-21.07	V
10.335	-71.94	Pk	37.5	-21.5	9.4	-46.54	-25	-21.54	H
High Channel, 2660.2MHz + 2680MHz									
10.661	-73.07	Pk	38	-21	10.5	-45.57	-25	-20.57	H
10.68	-72.19	Pk	38	-21.1	10.9	-44.39	-25	-19.39	V
5.288	-67.83	Pk	34.4	-27.8	11.1	-50.13	-25	-25.13	V
5.303	-69.84	Pk	34.4	-27.9	10.9	-52.44	-25	-27.44	H
7.988	-71.84	Pk	35.7	-24.3	11.3	-49.14	-25	-24.14	H
7.989	-71.66	Pk	35.7	-24.2	11.5	-48.66	-25	-23.66	V

Pk - Peak detector

Company:	
Project #:	12696945
Date:	5/22/2019
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 41 16QAM 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2506MHz + 2525.8MHz									
5.002	-69.09	Pk	34.1	-28.6	10.7	-52.89	-25	-27.89	H
7.523	-72.14	Pk	35.6	-24.6	10.4	-50.74	-25	-25.74	H
4.999	-66.39	Pk	34.1	-28.5	10.7	-50.09	-25	-25.09	V
7.522	-71.62	Pk	35.6	-24.6	10.6	-50.02	-25	-25.02	V
10.002	-72.38	Pk	36.8	-22.2	10.7	-47.08	-25	-22.08	V
10.024	-72.88	Pk	36.9	-22.3	10.4	-47.88	-25	-22.88	H
Mid Channel, 2583.1MHz + 2602.9MHz									
7.748	-70.84	Pk	35.7	-24.4	11.2	-48.34	-25	-23.34	H
7.747	-71.61	Pk	35.7	-24.4	11.3	-49.01	-25	-24.01	V
5.161	-69.06	Pk	34.2	-28.5	11.5	-51.86	-25	-26.86	H
5.168	-67	Pk	34.2	-28.5	11.6	-49.7	-25	-24.70	V
10.3	-72.47	Pk	37.4	-21.3	10.2	-46.17	-25	-21.17	V
10.316	-72.98	Pk	37.5	-21.3	9.8	-46.98	-25	-21.98	H
High Channel, 2660.2MHz + 2680MHz									
10.662	-73.44	Pk	37.9	-21.1	10.5	-46.14	-25	-21.14	H
8.051	-71.85	Pk	35.6	-24.1	11.4	-48.95	-25	-23.95	V
10.661	-73.65	Pk	38	-21	10.9	-45.75	-25	-20.75	V
5.308	-68.43	Pk	34.4	-28	10.8	-51.23	-25	-26.23	H
5.325	-69.86	Pk	34.4	-28.1	10.8	-52.76	-25	-27.76	V
7.983	-71.89	Pk	35.6	-24.2	11.3	-49.19	-25	-24.19	H

Pk - Peak detector

9.3. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 3

9.3.1. LTE BAND 7

Company:	
Project #:	12696945
Date:	5/30/2019
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 7 QPSK 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2510MHz + 2529.8MHz									
5.038	-67.05	Pk	34.1	-28.8	11.1	-50.65	-25	-25.65	H
7.535	-69.78	Pk	35.6	-24.5	10.6	-48.08	-25	-23.08	H
5.041	-66.92	Pk	34.2	-28.7	10.9	-50.52	-25	-25.52	V
7.53	-70.48	Pk	35.6	-24.5	10.6	-48.78	-25	-23.78	V
10.036	-72.04	Pk	36.9	-22.1	10.4	-46.84	-25	-21.84	H
10.041	-71.34	Pk	37	-22.1	10.7	-45.74	-25	-20.74	V
Mid Channel, 2525.1MHz + 2544.9MHz									
5.043	-65.39	Pk	34.2	-28.6	10.9	-48.89	-25	-23.89	H
7.588	-70.14	Pk	35.6	-24.4	10.5	-48.44	-25	-23.44	H
5.045	-66.58	Pk	34.2	-28.5	11	-49.88	-25	-24.88	H
7.582	-70.15	Pk	35.5	-24.3	10.5	-48.45	-25	-23.45	H
10.092	-71	Pk	37	-22	10.4	-45.6	-25	-20.60	H
10.093	-71.75	Pk	37	-22	10.4	-46.35	-25	-21.35	H
High Channel, 2540.2MHz + 2560MHz									
5.082	-68.08	Pk	34.2	-28.7	10.7	-51.88	-25	-26.88	H
7.598	-69.05	Pk	35.5	-24.4	10.5	-47.45	-25	-22.45	H
5.085	-67.82	Pk	34.2	-28.6	11.2	-51.02	-25	-26.02	V
7.599	-69.2	Pk	35.5	-24.4	10.9	-47.2	-25	-22.20	V
10.16	-71.45	Pk	37.2	-21.6	10.3	-45.55	-25	-20.55	V
10.168	-71.59	Pk	37.2	-21.5	10.4	-45.49	-25	-20.49	H

Pk - Peak detector

Company:	
Project #:	12696945
Date:	5/30/2019
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 7 16QAM 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2510MHz + 2529.8MHz									
5.047	-66.26	Pk	34.2	-28.5	11.1	-49.46	-25	-24.46	H
7.552	-70.53	Pk	35.5	-24.4	10.8	-48.63	-25	-23.63	H
5.046	-66.73	Pk	34.2	-28.5	11.2	-49.83	-25	-24.83	V
7.54	-70.39	Pk	35.5	-24.6	10.8	-48.69	-25	-23.69	V
10.089	-70.85	Pk	36.9	-22.1	10.5	-45.55	-25	-20.55	V
10.09	-71.63	Pk	37	-22.1	10.3	-46.43	-25	-21.43	H
Mid Channel, 2525.1MHz + 2544.9MHz									
5.05	-66.07	Pk	34.2	-28.5	11.2	-49.17	-25	-24.17	H
7.472	-69.89	Pk	35.6	-24.6	10.5	-48.39	-25	-23.39	H
5.05	-66.64	Pk	34.2	-28.5	11.2	-49.74	-25	-24.74	V
7.452	-71.18	Pk	35.6	-24.7	11.1	-49.18	-25	-24.18	V
10.082	-71.5	Pk	36.9	-22	10.1	-46.5	-25	-21.50	H
10.098	-70.78	Pk	37	-21.9	10.6	-45.08	-25	-20.08	V
High Channel, 2540.2MHz + 2560MHz									
5.067	-68.11	Pk	34.1	-28.7	10.7	-52.01	-25	-27.01	H
7.604	-69.55	Pk	35.6	-24.4	10.7	-47.65	-25	-22.65	H
5.074	-67.89	Pk	34.1	-28.7	10.9	-51.59	-25	-26.59	V
7.608	-69.44	Pk	35.6	-24.4	11.2	-47.04	-25	-22.04	V
10.145	-71.43	Pk	37.1	-21.6	9.6	-46.33	-25	-21.33	H
10.148	-70.72	Pk	37.2	-21.6	10.1	-45.02	-25	-20.02	V

Pk - Peak detector

9.3.2. LTE BAND 41

Company:	
Project #:	12696945
Date:	5/30/2019
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 41 QPSK 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2506MHz + 2525.8MHz									
5.038	-67.05	Pk	34.1	-28.8	11.1	-50.65	-25	-25.65	H
7.535	-69.78	Pk	35.6	-24.5	10.6	-48.08	-25	-23.08	H
5.041	-66.92	Pk	34.2	-28.7	10.9	-50.52	-25	-25.52	V
7.53	-70.48	Pk	35.6	-24.5	10.6	-48.78	-25	-23.78	V
10.036	-72.04	Pk	36.9	-22.1	10.4	-46.84	-25	-21.84	H
10.041	-71.34	Pk	37	-22.1	10.7	-45.74	-25	-20.74	V
Mid Channel, 2583.1MHz + 2602.9MHz									
5.043	-65.39	Pk	34.2	-28.6	10.9	-48.89	-25	-23.89	H
7.588	-70.14	Pk	35.6	-24.4	10.5	-48.44	-25	-23.44	H
5.045	-66.58	Pk	34.2	-28.5	11	-49.88	-25	-24.88	H
7.582	-70.15	Pk	35.5	-24.3	10.5	-48.45	-25	-23.45	H
10.092	-71	Pk	37	-22	10.4	-45.6	-25	-20.60	H
10.093	-71.75	Pk	37	-22	10.4	-46.35	-25	-21.35	H
High Channel, 2660.2MHz + 2680MHz									
5.082	-68.08	Pk	34.2	-28.7	10.7	-51.88	-25	-26.88	H
7.598	-69.05	Pk	35.5	-24.4	10.5	-47.45	-25	-22.45	H
5.085	-67.82	Pk	34.2	-28.6	11.2	-51.02	-25	-26.02	V
7.599	-69.2	Pk	35.5	-24.4	10.9	-47.2	-25	-22.20	V
10.16	-71.45	Pk	37.2	-21.6	10.3	-45.55	-25	-20.55	V
10.168	-71.59	Pk	37.2	-21.5	10.4	-45.49	-25	-20.49	H

Pk - Peak detector

Company:	
Project #:	12696945
Date:	5/30/2019
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 41 16QAM 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2506MHz + 2525.8MHz									
5.047	-66.26	Pk	34.2	-28.5	11.1	-49.46	-25	-24.46	H
7.552	-70.53	Pk	35.5	-24.4	10.8	-48.63	-25	-23.63	H
5.046	-66.73	Pk	34.2	-28.5	11.2	-49.83	-25	-24.83	V
7.54	-70.39	Pk	35.5	-24.6	10.8	-48.69	-25	-23.69	V
10.089	-70.85	Pk	36.9	-22.1	10.5	-45.55	-25	-20.55	V
10.09	-71.63	Pk	37	-22.1	10.3	-46.43	-25	-21.43	H
Mid Channel, 2583.1MHz + 2602.9MHz									
5.05	-66.07	Pk	34.2	-28.5	11.2	-49.17	-25	-24.17	H
7.472	-69.89	Pk	35.6	-24.6	10.5	-48.39	-25	-23.39	H
5.05	-66.64	Pk	34.2	-28.5	11.2	-49.74	-25	-24.74	V
7.452	-71.18	Pk	35.6	-24.7	11.1	-49.18	-25	-24.18	V
10.082	-71.5	Pk	36.9	-22	10.1	-46.5	-25	-21.50	H
10.098	-70.78	Pk	37	-21.9	10.6	-45.08	-25	-20.08	V
High Channel, 2660.2MHz + 2680MHz									
5.067	-68.11	Pk	34.1	-28.7	10.7	-52.01	-25	-27.01	H
7.604	-69.55	Pk	35.6	-24.4	10.7	-47.65	-25	-22.65	H
5.074	-67.89	Pk	34.1	-28.7	10.9	-51.59	-25	-26.59	V
7.608	-69.44	Pk	35.6	-24.4	11.2	-47.04	-25	-22.04	V
10.145	-71.43	Pk	37.1	-21.6	9.6	-46.33	-25	-21.33	H
10.148	-70.72	Pk	37.2	-21.6	10.1	-45.02	-25	-20.02	V

Pk - Peak detector

9.4. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 4

9.4.1. LTE BAND 7

Company:	
Project #:	12696945
Date:	5/30/2019
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 7 QPSK 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2510MHz + 2529.8MHz									
5.001	-67.7	Pk	34.1	-28.6	10.7	-51.5	-25	-26.50	H
7.518	-72.32	Pk	35.5	-24.5	10.4	-50.92	-25	-25.92	H
5.018	-67.89	Pk	34.1	-28.9	10.6	-52.09	-25	-27.09	V
7.512	-71.74	Pk	35.6	-24.5	10.9	-49.74	-25	-24.74	V
9.997	-72.55	Pk	36.8	-22.3	10.6	-47.45	-25	-22.45	V
10.041	-71.93	Pk	37	-22.1	10.4	-46.63	-25	-21.63	H
Mid Channel, 2525.1MHz + 2544.9MHz									
5.046	-66.24	Pk	34.2	-28.5	11.1	-49.44	-25	-24.44	H
7.6	-69.14	Pk	35.5	-24.4	10.6	-47.44	-25	-22.44	H
5.053	-66.47	Pk	34.1	-28.5	11.2	-49.67	-25	-24.67	V
7.65	-70.08	Pk	35.5	-24.5	11	-48.08	-25	-23.08	V
10.099	-71.57	Pk	37.1	-21.9	10.7	-45.67	-25	-20.67	V
10.115	-71.97	Pk	37.1	-21.7	10.4	-46.17	-25	-21.17	H
High Channel, 2540.2MHz + 2560MHz									
5.084	-68.02	Pk	34.4	-28.7	10.8	-51.52	-25	-26.52	H
7.615	-70.01	Pk	35.7	-24.4	10.9	-47.81	-25	-22.81	H
5.092	-68.08	Pk	34.4	-28.5	11.1	-51.08	-25	-26.08	V
7.619	-70.43	Pk	35.8	-24.4	11.5	-47.53	-25	-22.53	V
10.154	-71.01	Pk	37.2	-21.6	10.2	-45.21	-25	-20.21	V
10.159	-70.98	Pk	37.2	-21.6	10.1	-45.28	-25	-20.28	H

Pk - Peak detector

Company:	
----------	--

Project #:	12696945
Date:	5/30/2019
Test Engineer:	12501
Configuration:	EUT
Mode:	LTE 7 16QAM 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2510MHz + 2529.8MHz									
5.018	-69.13	Pk	34.1	-28.9	10.5	-53.43	-25	-28.43	H
7.527	-70.98	Pk	35.6	-24.6	10.4	-49.58	-25	-24.58	H
5.002	-67.9	Pk	34.1	-28.6	10.7	-51.7	-25	-26.70	V
7.524	-70.52	Pk	35.6	-24.6	10.6	-48.92	-25	-23.92	V
10.035	-72.39	Pk	36.9	-22.1	10.4	-47.19	-25	-22.19	H
10.049	-72.35	Pk	37	-22.1	10.5	-46.95	-25	-21.95	V
Mid Channel, 2525.1MHz + 2544.9MHz									
5.053	-65.82	Pk	34.1	-28.5	11.1	-49.12	-25	-24.12	H
7.722	-68.93	Pk	35.6	-24.6	11	-46.93	-25	-21.93	H
5.052	-65.83	Pk	34.1	-28.5	11.2	-49.03	-25	-24.03	V
7.726	-69.12	Pk	35.6	-24.6	11.1	-47.02	-25	-22.02	V
10.293	-71.38	Pk	37.4	-21.5	10.4	-45.08	-25	-20.08	V
10.294	-71.66	Pk	37.4	-21.5	10.2	-45.56	-25	-20.56	H
High Channel, 2540.2MHz + 2560MHz									
5.073	-73.78	Pk	34.3	-28.6	10.8	-57.28	-25	-32.28	H
7.61	-70.53	Pk	35.8	-24.4	10.8	-48.33	-25	-23.33	H
5.06	-68.2	Pk	34.3	-28.8	11.1	-51.6	-25	-26.60	V
7.587	-71.36	Pk	35.8	-24.4	10.7	-49.26	-25	-24.26	V
10.129	-72.4	Pk	37.2	-21.7	10.2	-46.7	-25	-21.70	V
10.141	-71.34	Pk	37.2	-21.6	9.5	-46.24	-25	-21.24	H

Pk - Peak detector

9.4.2. LTE BAND 41

Company:	
Project #:	12696945
Date:	5/30/2019
Test Engineer:	39006
Configuration:	EUT
Mode:	LTE 41 QPSK 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2506MHz + 2525.8MHz									
5.101	-77.95	Pk	34.5	-28.4	11.4	-60.45	-25	-35.45	V
5.11	-67.38	Pk	34.4	-28.3	11.3	-49.98	-25	-24.98	H
7.233	-69.76	Pk	36	-25.1	11.1	-47.76	-25	-22.76	V
7.286	-70.01	Pk	35.8	-25.1	10.6	-48.71	-25	-23.71	H
10.556	-71.4	Pk	37.8	-21.5	10.2	-44.9	-25	-19.90	H
10.573	-72.39	Pk	37.8	-21.5	10.2	-45.89	-25	-20.89	V
Mid Channel, 2583.1MHz + 2602.9MHz									
5.16	-67.82	Pk	34.5	-28.5	11.5	-50.32	-25	-25.32	H
5.178	-68.22	Pk	34.6	-28.6	11.3	-50.92	-25	-25.92	V
7.102	-75.94	Pk	36	-25.3	10.3	-54.94	-25	-29.94	V
7.12	-69.98	Pk	36.2	-25.2	10.5	-48.48	-25	-23.48	H
10.174	-72.18	Pk	37.2	-21.5	10.7	-45.78	-25	-20.78	V
10.231	-72.8	Pk	37.3	-21.6	10	-47.1	-25	-22.10	H
High Channel, 2660.2MHz + 2680MHz									
5.896	-68.41	Pk	35.2	-27.1	11	-49.31	-25	-24.31	V
5.908	-69.19	Pk	35.3	-27	10.7	-50.19	-25	-25.19	H
8.382	-70.58	Pk	35.9	-24.1	11.4	-47.38	-25	-22.38	V
8.391	-70.61	Pk	35.9	-24.2	11.1	-47.81	-25	-22.81	H
10.244	-71.97	Pk	37.3	-21.4	10.2	-45.87	-25	-20.87	V
10.328	-78.96	Pk	37.4	-21.5	9.4	-53.66	-25	-28.66	H

Pk - Peak detector

Company:	
Project #:	12696945
Date:	5/30/2019
Test Engineer:	39006
Configuration:	EUT
Mode:	LTE 41 16QAM 20MHz + 20MHz
Chamber #:	Chamber A

Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Polarity
Low Channel, 2506MHz + 2525.8MHz									
5.101	-67.12	Pk	34.5	-28.4	11.4	-49.62	-25	-24.62	V
5.114	-67.53	Pk	34.4	-28.4	11.2	-50.33	-25	-25.33	H
7.346	-70.59	Pk	35.8	-24.8	10.7	-48.89	-25	-23.89	H
7.355	-69.91	Pk	35.7	-24.7	11.1	-47.81	-25	-22.81	V
10.564	-72.15	Pk	37.8	-21.5	10.4	-45.45	-25	-20.45	V
10.589	-72.54	Pk	37.8	-21.3	10.1	-45.94	-25	-20.94	H
Mid Channel, 2583.1MHz + 2602.9MHz									
5.105	-66.66	Pk	34.5	-28.4	11.2	-49.36	-25	-24.36	H
5.112	-67.1	Pk	34.4	-28.4	11.1	-50	-25	-25.00	V
7.357	-69.9	Pk	35.7	-24.6	11.2	-47.6	-25	-22.60	V
7.367	-71.15	Pk	35.7	-24.6	10.9	-49.15	-25	-24.15	H
10.347	-71.59	Pk	37.5	-21.3	10.1	-45.29	-25	-20.29	V
10.387	-83	Pk	37.5	-21.4	9.7	-57.2	-25	-32.20	H
High Channel, 2660.2MHz + 2680MHz									
5.106	-67.25	Pk	34.5	-28.3	11.3	-49.75	-25	-24.75	V
5.122	-68.43	Pk	34.6	-28.6	10.8	-51.63	-25	-26.63	H
7.299	-70.13	Pk	35.7	-24.9	11.2	-48.13	-25	-23.13	V
7.316	-70.59	Pk	35.7	-25	10.8	-49.09	-25	-24.09	H
10.244	-72.48	Pk	37.3	-21.4	10.2	-46.38	-25	-21.38	V
10.282	-72.29	Pk	37.3	-21.5	9.9	-46.59	-25	-21.59	H

Pk - Peak detector

10. SETUP PHOTOS

Please see setup photo report 12607353-EP1V1

END OF REPORT