



FCC CFR 47 PART 15 SUBPART F §15.519

CERTIFICATION TEST REPORT

FOR

SMART PHONE

MODEL NUMBER: A2215

REPORT NUMBER: 12267350-E12V1

ISSUE DATE: AUGUST 15, 2019

FCC ID: BCG-E3307A

Prepared for

**APPLE INC.
ONE APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	08/01/2019	Initial Issue	Thu Chan
V2	08/15/2019	Added "Sample Calculations" in Section 4. Addressed TCB Questions	GP Chin

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATIONS</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY</i>	<i>6</i>
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER</i>	<i>8</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>8</i>
5.4. <i>MODULATION</i>	<i>8</i>
5.5. <i>SOFTWARE AND FIRMWARE</i>	<i>8</i>
6. DESCRIPTION OF TEST SETUP	9
7. TEST AND MEASUREMENT EQUIPMENT	11
8. APPLICABLE LIMITS AND TEST RESULTS	12
8.1. <i>OPERATING BANDWIDTH</i>	<i>12</i>
8.2. <i>PEAK POWER AND MAXIMUM AVERAGE EMISSIONS</i>	<i>38</i>
8.3. <i>CESSATION TIME</i>	<i>88</i>
8.4. <i>AVERAGE EMISSIONS</i>	<i>90</i>
8.4.1. <i>AVERAGE EMISSIONS, 9 kHz – 30 MHz</i>	<i>93</i>
8.4.2. <i>AVERAGE EMISSIONS, 30 – 960 MHz</i>	<i>101</i>
8.4.3. <i>AVERAGE EMISSIONS, 0.96 – 6 GHz</i>	<i>109</i>
8.4.4. <i>AVERAGE EMISSIONS, 9 – 18 GHz</i>	<i>117</i>
8.4.5. <i>AVERAGE EMISSIONS, 1.164 – 1.240 GHz</i>	<i>125</i>
8.4.6. <i>AVERAGE EMISSIONS, 1.559 – 1.610 GHz</i>	<i>133</i>
8.4.7. <i>AVERAGE EMISSIONS, 18 - 26 GHz</i>	<i>141</i>
8.4.8. <i>AVERAGE EMISSIONS, 26 – 40 GHz</i>	<i>149</i>
8.5. <i>AC POWER LINE CONDUCTED EMISSIONS</i>	<i>157</i>
8.5.1. <i>AC Power Line Host</i>	<i>158</i>
8.5.2. <i>AC Power Line Norm</i>	<i>160</i>
9. SETUP PHOTOS	162

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
ONE APPLE PARK WAY
CUPERTINO, CA 95014, USA

EUT DESCRIPTION: SMART PHONE

MODEL: A2215

SERIAL NUMBER: C39YT0BMN2RQ

DATE TESTED: June 1 – July 18, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC §15 Subpart F	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



THU CHAN
OPERATION LEADER
UL Verification Services Inc.

GIA-PIAO CHIN
TEST ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with CFR Title 47 Part 15 Subpart F, KDB 393764 D01 UWB FAQ v02 and ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input checked="" type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input checked="" type="checkbox"/> Chamber F
	<input checked="" type="checkbox"/> Chamber G
	<input type="checkbox"/> Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. SAMPLE CALCULATIONS

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} \\ &\quad + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ &= 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} \\ &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\text{Average EIRP (dBm/MHz) @ 3 m} = \text{Field Strength (dBuV/m)} - 95.2$$

$$\text{Peak EIRP (dBm/50MHz) @ 3 m} = \text{Field Strength (dBuV/m)} - 95.2$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9 kHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9 kHz to 30 MHz	2.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Radiated Disturbance, 26000 to 40000 MHz	5.17 dB
Occupied Channel Bandwidth	±0.39 %
Temperature	±0.9 °C
Supply voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a UWB transceiver with 4 integral antennas (ANT 0,1,2 & 3) installed in a smart phone host and operates on 6.5 GHz (Channel 5) and 8 GHz (Channel 9). The antennas are not user accessible. Six signal configurations (CONFIG 0,1,2,3,4 & 5) are available for each ANT/CH setting.

ANT	CH	CONFIG
0	5	0
0	5	1
0	5	2
0	5	3
0	5	4
0	5	5
0	9	0
0	9	1
0	9	2
0	9	3
0	9	4
0	9	5
1	5	0
1	5	1
1	5	2
1	5	3
1	5	4
1	5	5
1	9	0
1	9	1
1	9	2
1	9	3
1	9	4
1	9	5
2	5	0
2	5	1
2	5	2
2	5	3
2	5	4
2	5	5
2	9	0
2	9	1
2	9	2
2	9	3
2	9	4
2	9	5
3	5	0
3	5	1
3	5	2
3	5	3
3	5	4
3	5	5
3	9	0
3	9	1
3	9	2
3	9	3
3	9	4
3	9	5

Other RF technologies incorporated on this device are not covered in this report.

5.2. MAXIMUM OUTPUT POWER

Highest Average Powers based on ANT/CH.

ANT	CH	CONFIG	Average Power (dBm EIRP)
0	5	1	-41.41
0	9	0	-41.48
1	5	5	-41.46
1	9	3	-41.35
2	5	1	-41.31
2	9	2	-41.32
3	5	1	-41.49
3	9	3	-41.44

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Four integral patch antennas are employed and the antenna gains are listed as follow:

CH	Freq. Band (GHz)	Gain (dBi)			
		ANT 0	ANT 1	ANT 2	ANT 3
5	6.5	-6.1	-6.3	-3.0	-7.8
9	8.0	-2.1	-0.8	-1.3	-3.0

5.4. MODULATION

The UWB signal is BPSK pulsed modulated signal.

5.5. SOFTWARE AND FIRMWARE

The Software and Firmware version used at test is 17A525.

6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
Laptop + Adapter	Apple	Mac Book Air	CO2PS2HGG085
Kanzi – USB Adapter	Apple	316FF9	--
Smart Phone	Apple	A2160	C39YT0DZLN2R0

I/O CABLES

EUT is tested with no peripherals attached. Accessories such as AC power adaptor and wired headset do not cause degradation.

TEST SETUP


The EUT was examined at pre-scan test using a fundamental frequency in the portrait (z), landscape (y), and flatbed (x) position and the worst case orientation of individual ANT/CH/CONFIG setting was determined for final spurious emission measurement. Configuration 3 of both CH5 and CH9 on all 4 antennas were selected to test for unwanted emissions as the worst case after pre-scan.

Measurements of spurious average emissions were made with the device operating at a higher power than production power to ensure compliance. Measurements of the in-band signal (peak and average emissions, 10 dBc bandwidth) were all made at the production power settings.

Battery was fully charged in all test cases.

For simultaneous transmission of multiple channels in the UWB, LTE, 2.4 GHz WiFi and 5 GHz WiFi bands, no noticeable new emission was found.

SETUP DIAGRAM FOR TESTS

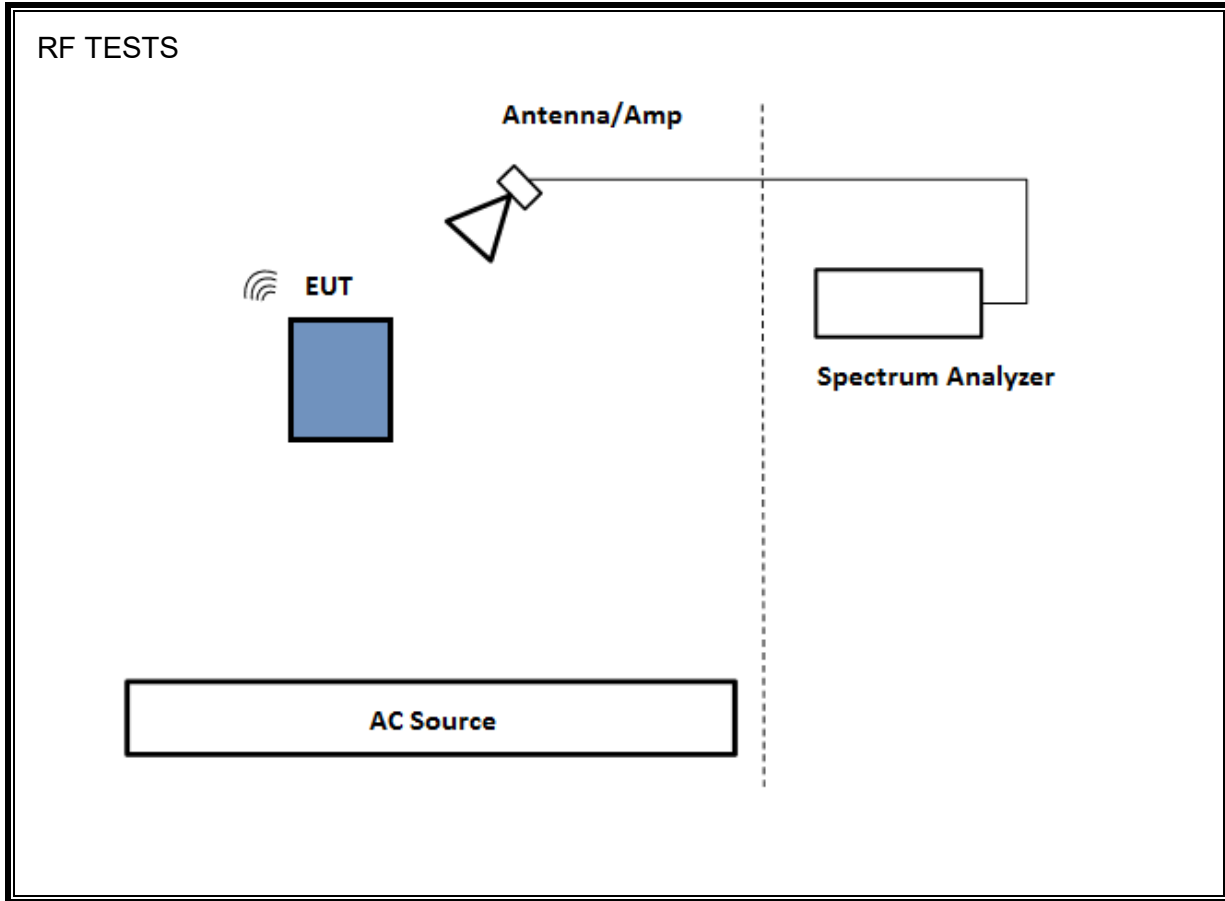

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List						
Description	Manufacturer	Model	S/N	Local ID	Cal Date	Cal Due
EMI Test Receiver	Rohde & Schwarz	ESW44	1328.4100K44-101726-gd	PRE0179377	2/15/2019	2/15/2020
Horn Antenna, 1-18 GHz	ETS Lindgren	3117	154523	T712	2/26/2019	2/26/2020
Preamp, 1-18 GHz	Miteq	AFS42-00101800-25-S-42	--	PRE0183530	5/31/2019	5/31/2020
PXA Signal Analyzer	Agilent	N9030A	MY53310959	T906	1/22/2019	1/22/2020
Hybrid Antenna, 30-1000 MHz	Sunol Sciences	JB3	A051314-1	T900	6/18/2018	6/18/2019*
Preamp, 0.1-1300 MHz	Sonoma Inst.	310	185623	T173	7/6/2018	7/6/2019*
Horn Antenna, 1-18 GHz	ETS Lindgren	3117	143447	T345	5/7/2019	5/7/2020
Preamp, 1-18 GHz	Miteq	AFS42-00101800-25-S-42	--	PRE0183207	12/15/2018	12/15/2019
PXA Signal Analyzer	Agilent	N9030A	MY52350671	T342	1/23/2019	1/23/2020
Amplifier, 10 kHz to 1 GHz	Sonoma Inst.	310	325117	T835	12/15/2018	12/15/2019
Antenna, Active Loop 9KHz to 30MHz	ETS Lindgren	6502	213423	T1616	10/18/2018	10/18/2019
Spectrum Analyzer, 44GHz	Keysight	N9030A	MY53311010	T905	1/24/2019	1/24/2020
Preamplifier, 1-26.5GHz	Agilent	8449B	3008A04710	T404	3/23/2019	3/23/2020
Horn Antenna, 18-26.5GHz	ARA	MWH-1826/B	209336	T447	6/16/2019	6/16/2020
Preamplifier, 26-40 GHz	Miteq	NSTTA2640-35-HG	--	T1864	3/23/2019	3/23/2020
Horn Antenna, 26-40 GHz	ARA	MWH-2640/B	209340	T446	8/9/2019	8/9/2020
Low Pass Filter, CH5	Wainwright Inst. GMBH	WLKX12-5400-5913-1800-60ST	7	--	NCR	--
Low Pass Filter, CH9	Wainwright Inst. GMBH	WLKX10-6400-7424-2100-60ST	5	--	NCR	--
High Pass Filter, CH5	Wainwright Inst. GMBH	WHW2-7100-10000-18000-40DC	11	--	NCR	--
High Pass Filter, CH9	Wainwright Inst. GMBH	WHW2-8165-11500-21000-40CD	5	--	NCR	--
Radiated Software	UL	UL EMC		Ver 9.5.01, Dec. 1, 2016 Ver 9.5.19 Oct 2016		

*Test data presented in the report was captured with equipment covered within the one year calibration period.

8. APPLICABLE LIMITS AND TEST RESULTS

8.1. OPERATING BANDWIDTH

LIMIT

§15.503 (a) *UWB bandwidth*. For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated fH and the lower boundary is designated fL. The frequency at which the highest radiated emission occurs is designated fM.

§15.503 (b) *Center frequency*. The center frequency, FC, equals $(FH + FL)/2$.

§15.503 (c) *Fractional bandwidth*. The fractional bandwidth equals $2(FH-FL)/(FH+ FL)$.

§15.503 (d) *Ultra-wideband (UWB) transmitter*. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

§15.519 (3)(b) The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.



TEST PROCEDURE



ANSI C63.10 Clause 10.1.



RESULTS



ANT	CH	CONFIG	Payload	EUT Orientation	Meas. Ant Polarity	FM (GHz)	FL Delta (GHz)	FH Delta (GHz)	FL (GHz)	FH (GHz)	FC (GHz)	OBW (MHz)	Min. OBW (MHz)	OBW Margin (MHz)	OBW Pass/Fail
0	5	0	125	Portrait	H	6.25075	0.024	0.5015	6.22675	6.75225	6.4895	525.5	500	25.5	P
0	5	1	125	Portrait	H	6.25075	0.024	0.502	6.22675	6.75275	6.48975	526	500	26	P
0	5	2	125	Portrait	H	6.25025	0.0225	0.5	6.22775	6.75025	6.489	522.5	500	22.5	P
0	5	3	125	Portrait	H	6.48975	0.2615	0.261	6.22825	6.75075	6.4895	522.5	500	22.5	P
0	5	4	0	Portrait	H	6.25025	0.0235	0.5025	6.22675	6.75275	6.48975	526	500	26	P
0	5	5	0	Portrait	H	6.25075	0.025	0.503	6.22575	6.75375	6.48975	528	500	28	P
0	9	0	125	Portrait	H	7.74825	0.024	0.502	7.72425	8.25025	7.98725	526	500	26	P
0	9	1	125	Portrait	H	7.74825	0.024	0.502	7.72425	8.25025	7.98725	526	500	26	P
0	9	2	125	Portrait	H	8.22625	0.501	0.023	7.72525	8.24925	7.98725	524	500	24	P
0	9	3	125	Portrait	H	8.22625	0.5	0.0215	7.72625	8.24775	7.987	521.5	500	21.5	P
0	9	4	0	Portrait	H	7.74775	0.0235	0.5025	7.72425	8.25025	7.98725	526	500	26	P
0	9	5	0	Portrait	H	7.74875	0.0255	0.5025	7.72325	8.25125	7.98725	528	500	28	P
1	5	0	125	Portrait	H	6.25025	0.0235	0.502	6.22675	6.75225	6.4895	525.5	500	25.5	P
1	5	1	125	Portrait	H	6.25025	0.0235	0.5025	6.22675	6.75275	6.48975	526	500	26	P
1	5	2	125	Portrait	H	6.25025	0.0225	0.501	6.22775	6.75125	6.4895	523.5	500	23.5	P
1	5	3	125	Portrait	H	6.25025	0.021	0.4995	6.22925	6.74975	6.4895	520.5	500	20.5	P
1	5	4	0	Portrait	H	6.25025	0.0235	0.502	6.22675	6.75225	6.4895	525.5	500	25.5	P
1	5	5	0	Portrait	H	6.25125	0.0255	0.502	6.22575	6.75325	6.4895	527.5	500	27.5	P
1	9	0	125	Portrait	H	7.74825	0.024	0.5015	7.72425	8.24975	7.987	525.5	500	25.5	P
1	9	1	125	Portrait	H	7.74825	0.024	0.5015	7.72425	8.24975	7.987	525.5	500	25.5	P
1	9	2	125	Portrait	H	7.74825	0.023	0.5005	7.72525	8.24875	7.987	523.5	500	23.5	P
1	9	3	125	Portrait	H	7.74825	0.0225	0.5005	7.72575	8.24875	7.98725	523	500	23	P
1	9	4	0	Portrait	H	7.74825	0.024	0.5015	7.72425	8.24975	7.987	525.5	500	25.5	P
1	9	5	0	Portrait	H	7.74875	0.0255	0.502	7.72325	8.25075	7.987	527.5	500	27.5	P
2	5	0	125	Portrait	H	6.72875	0.502	0.024	6.22675	6.75275	6.48975	526	500	26	P
2	5	1	125	Portrait	H	6.72875	0.502	0.024	6.22675	6.75275	6.48975	526	500	26	P
2	5	2	125	Portrait	H	6.72875	0.501	0.0225	6.22775	6.75125	6.4895	523.5	500	23.5	P
2	5	3	125	Portrait	H	6.25025	0.0205	0.5005	6.22975	6.75075	6.49025	521	500	21	P
2	5	4	0	Portrait	H	6.72875	0.502	0.024	6.22675	6.75275	6.48975	526	500	26	P
2	5	5	0	Portrait	H	6.72825	0.5025	0.0255	6.22575	6.75375	6.48975	528	500	28	P
2	9	0	125	Portrait	H	7.74825	0.024	0.501	7.72425	8.24925	7.98675	525	500	25	P
2	9	1	125	Portrait	H	7.74825	0.024	0.5005	7.72425	8.24875	7.9865	524.5	500	24.5	P
2	9	2	125	Portrait	H	7.74775	0.0225	0.501	7.72525	8.24875	7.987	523.5	500	23.5	P
2	9	3	125	Portrait	H	7.72725	0.0015	0.52	7.72575	8.24725	7.9865	521.5	500	21.5	P
2	9	4	0	Portrait	H	7.74775	0.0235	0.5015	7.72425	8.24925	7.98675	525	500	25	P
2	9	5	0	Portrait	H	7.74825	0.025	0.502	7.72325	8.25025	7.98675	527	500	27	P
3	5	0	125	Portrait	H	6.72875	0.024	0.502	6.70475	7.23075	6.96775	526	500	26	P
3	5	1	125	Portrait	H	6.72875	0.024	0.5015	6.70475	7.23025	6.9675	525.5	500	25.5	P
3	5	2	125	Portrait	H	6.72875	0.0225	0.501	6.70625	7.22975	6.968	523.5	500	23.5	P
3	5	3	125	Portrait	H	6.72875	0.021	0.4995	6.70775	7.22825	6.968	520.5	500	20.5	P
3	5	4	0	Portrait	H	6.72925	0.0235	0.5025	6.70575	7.23175	6.96875	526	500	26	P
3	5	5	0	Portrait	H	6.72825	0.0255	0.502	6.70275	7.23025	6.9665	527.5	500	27.5	P
3	9	0	125	Portrait	H	8.22675	0.5025	0.0235	7.72425	8.25025	7.98725	526	500	26	P
3	9	1	125	Portrait	H	8.22625	0.502	0.024	7.72425	8.25025	7.98725	526	500	26	P
3	9	2	125	Portrait	H	7.74775	0.0235	0.5025	7.72425	8.25025	7.98725	526	500	26	P
3	9	3	125	Portrait	H	7.74825	0.021	0.5	7.72725	8.24825	7.98775	521	500	21	P
3	9	4	0	Portrait	H	8.22625	0.5025	0.024	7.72375	8.25025	7.987	526.5	500	26.5	P
3	9	5	0	Portrait	H	7.74825	0.025	0.503	7.72325	8.25125	7.98725	528	500	28	P



OBW

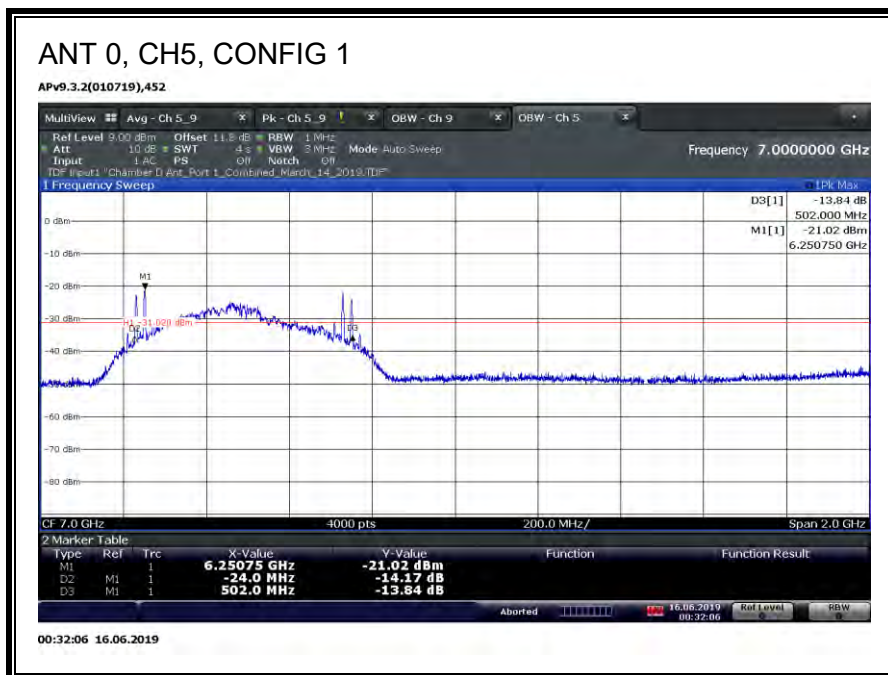
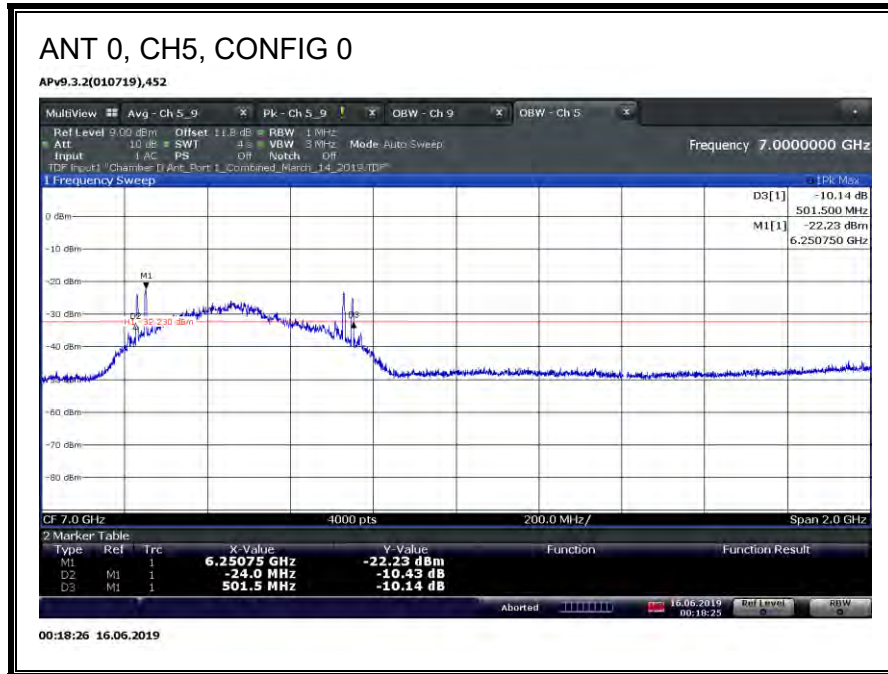


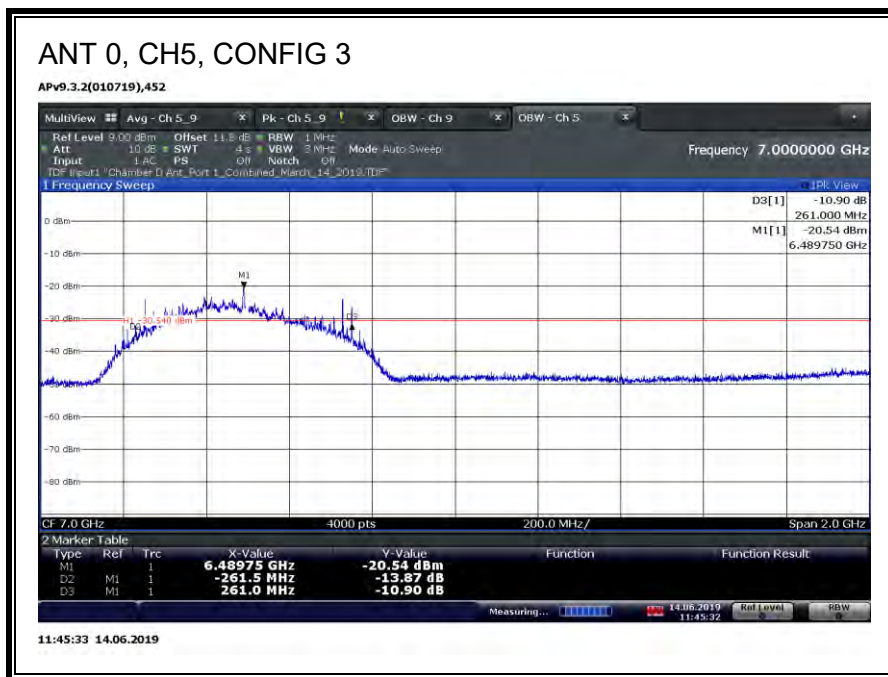
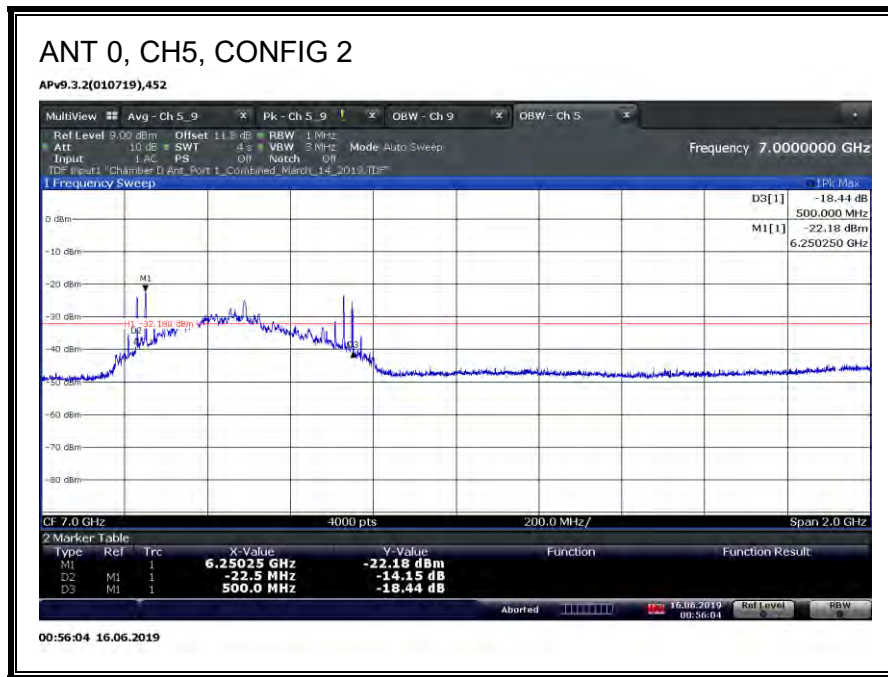


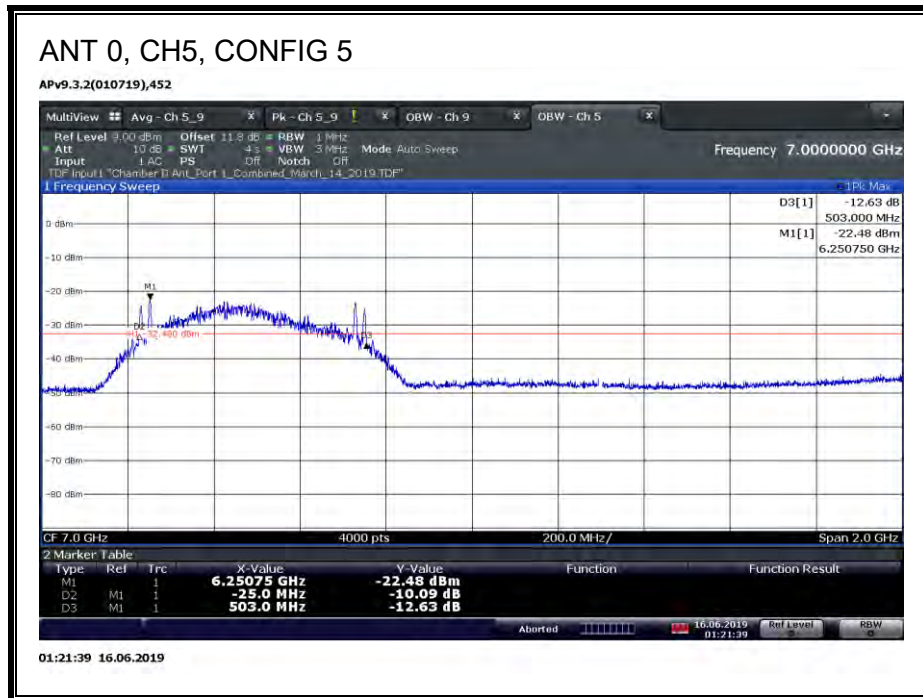
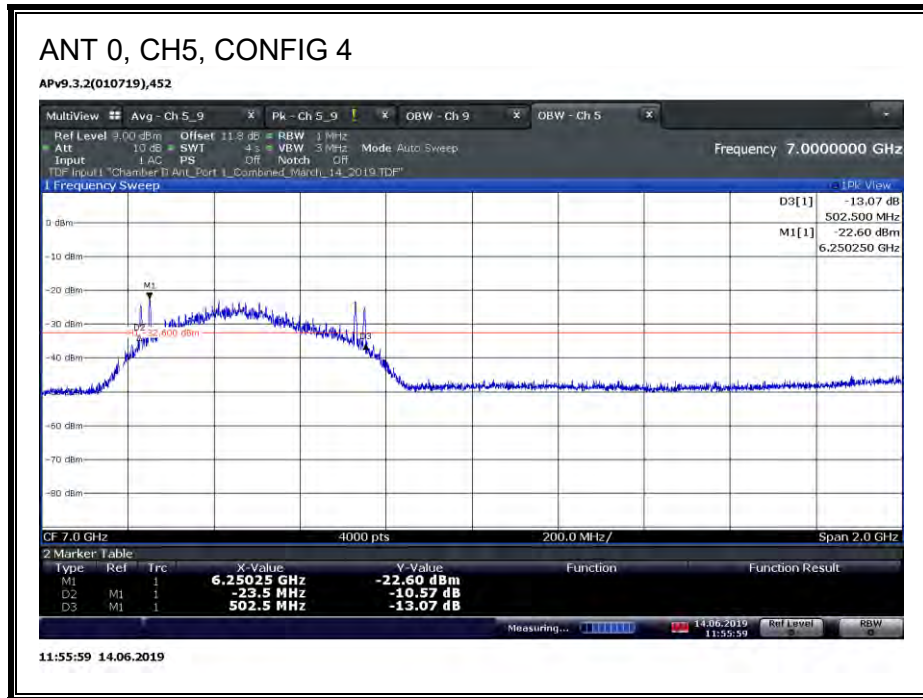


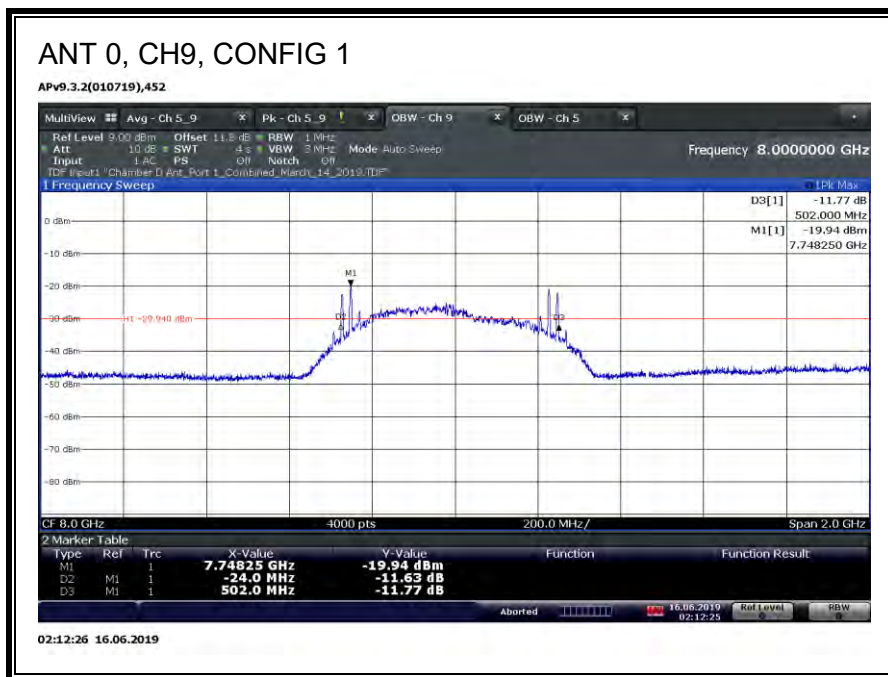
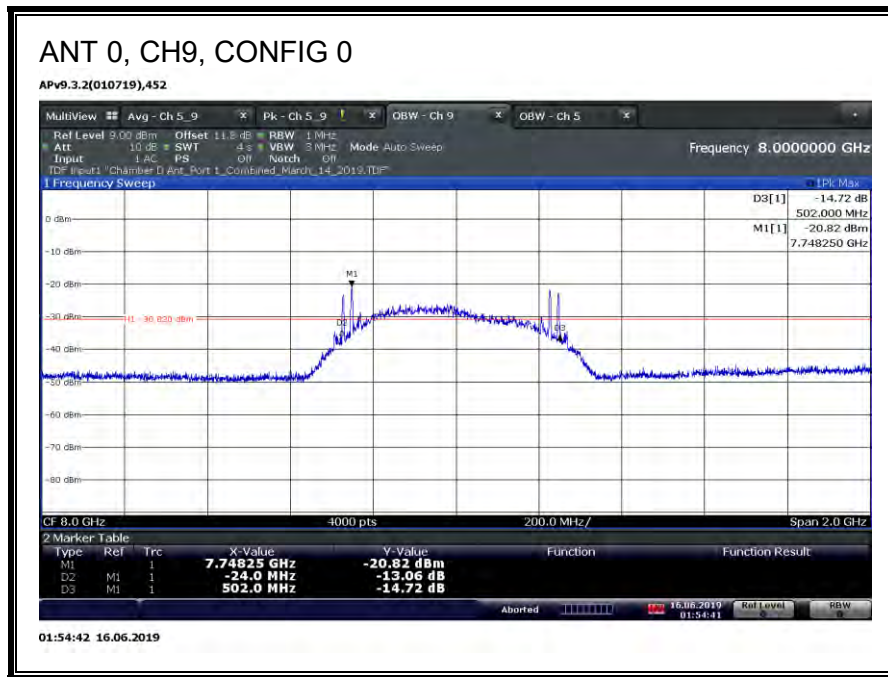


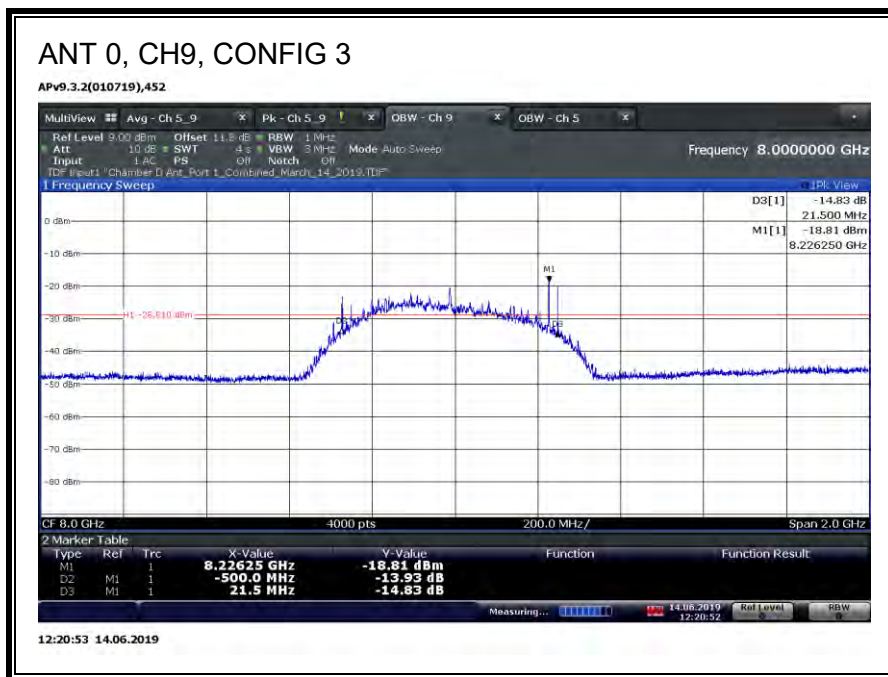
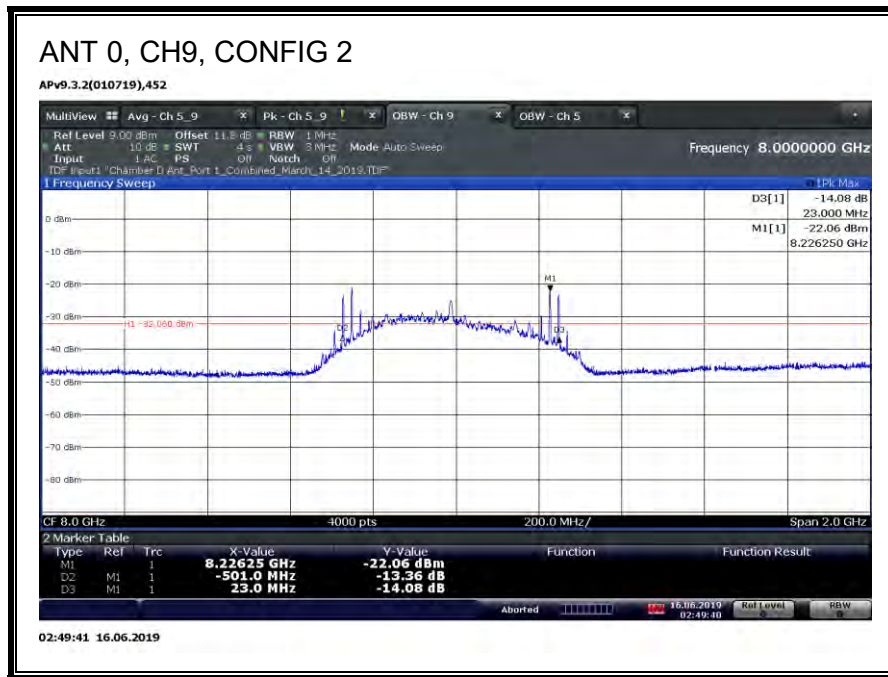


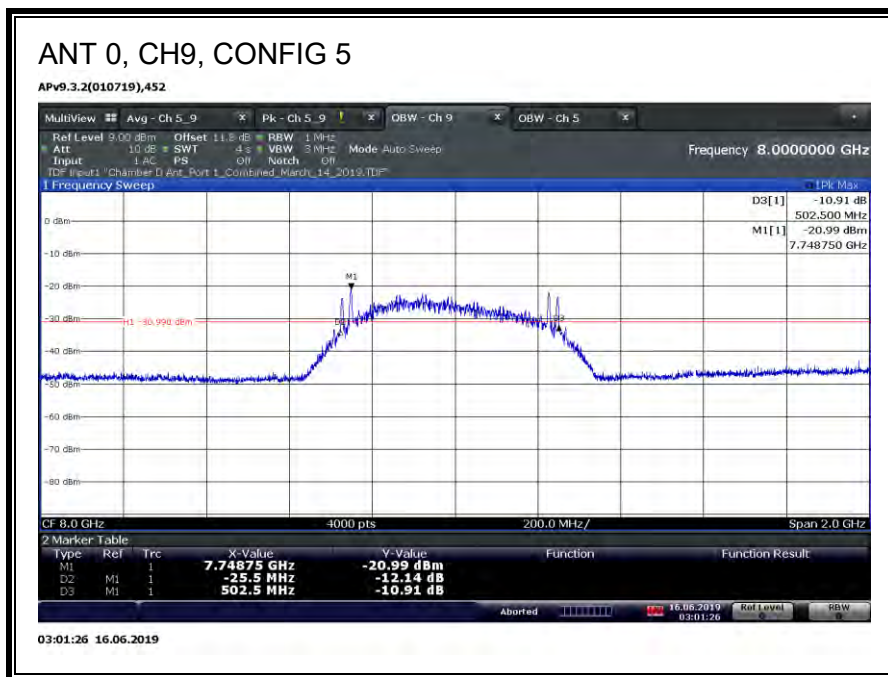
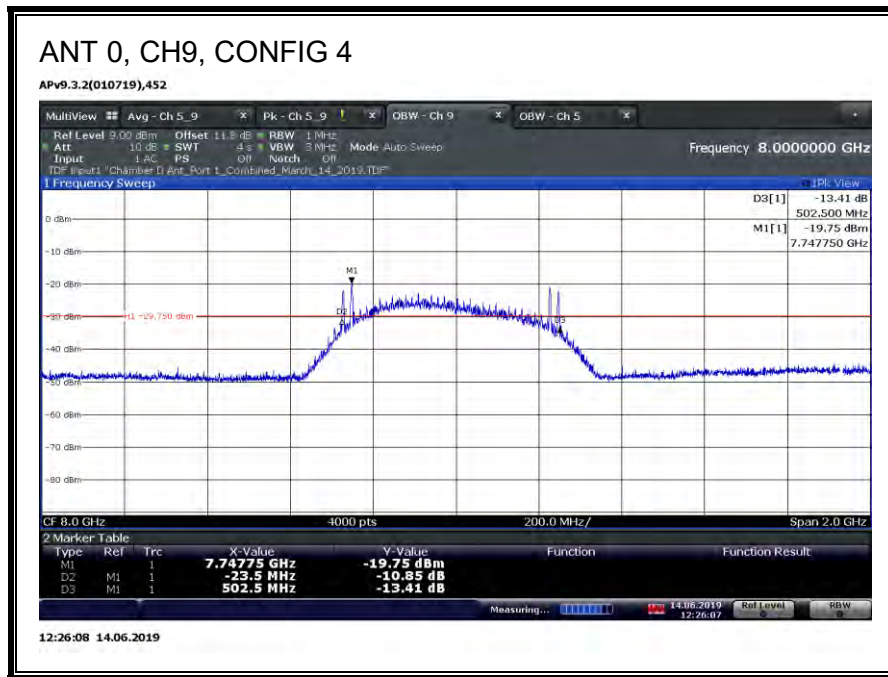


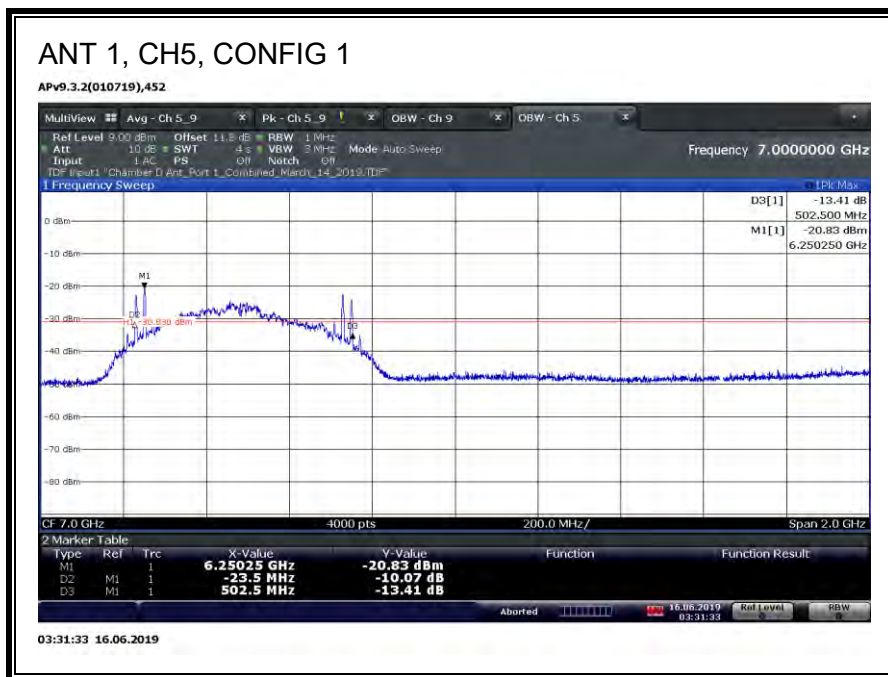
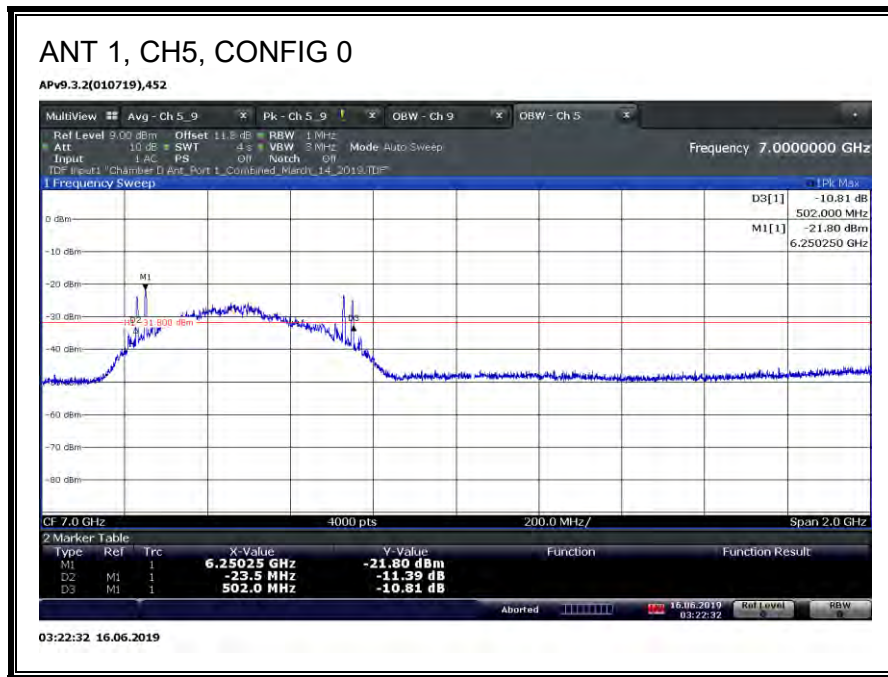


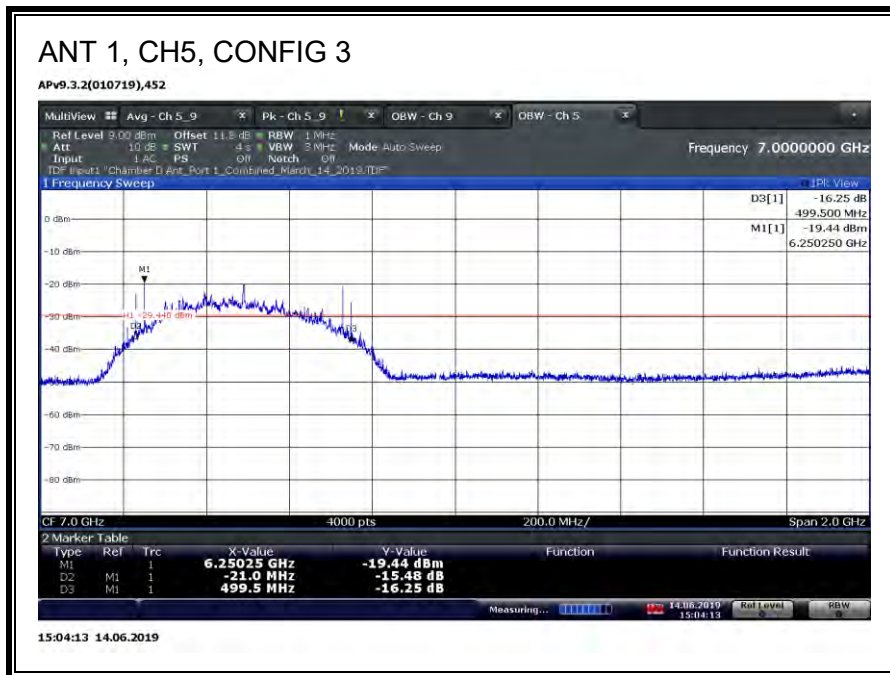
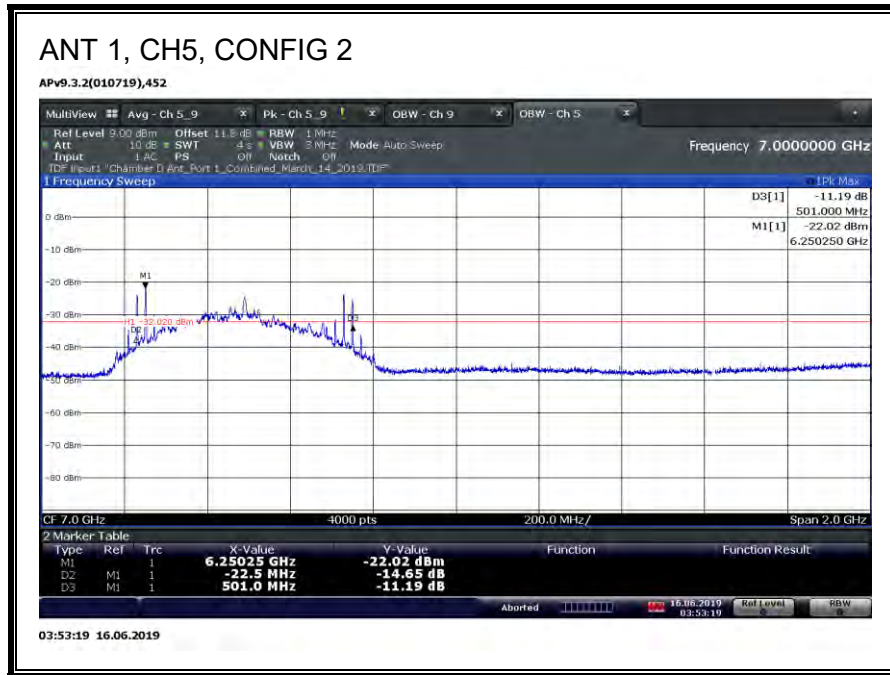


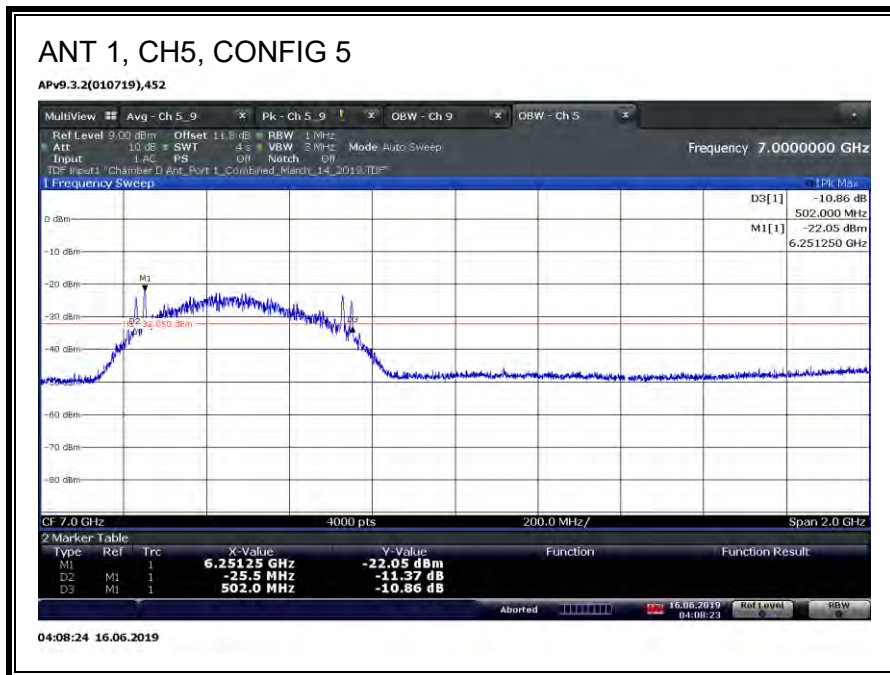
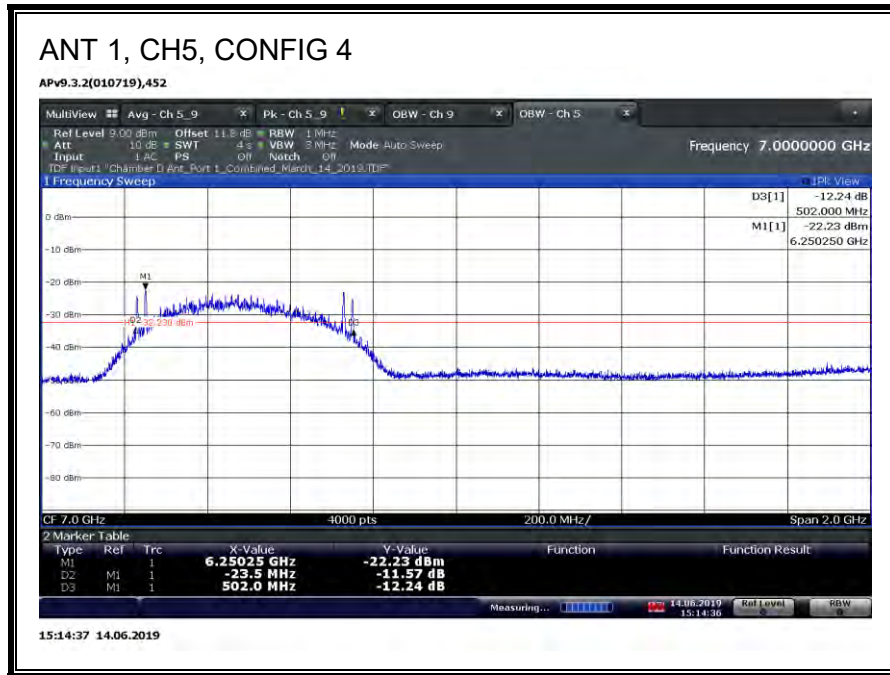


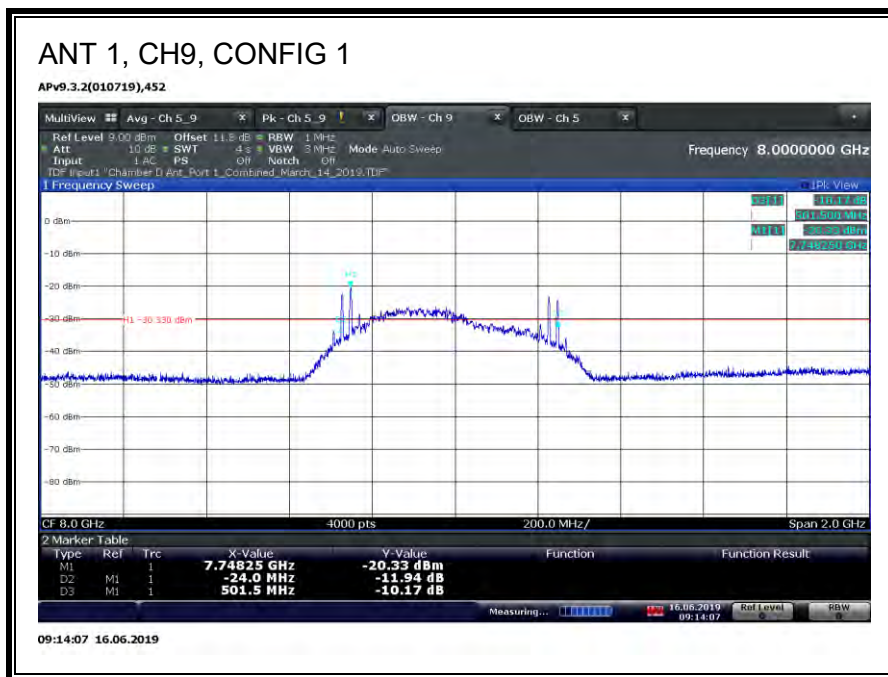
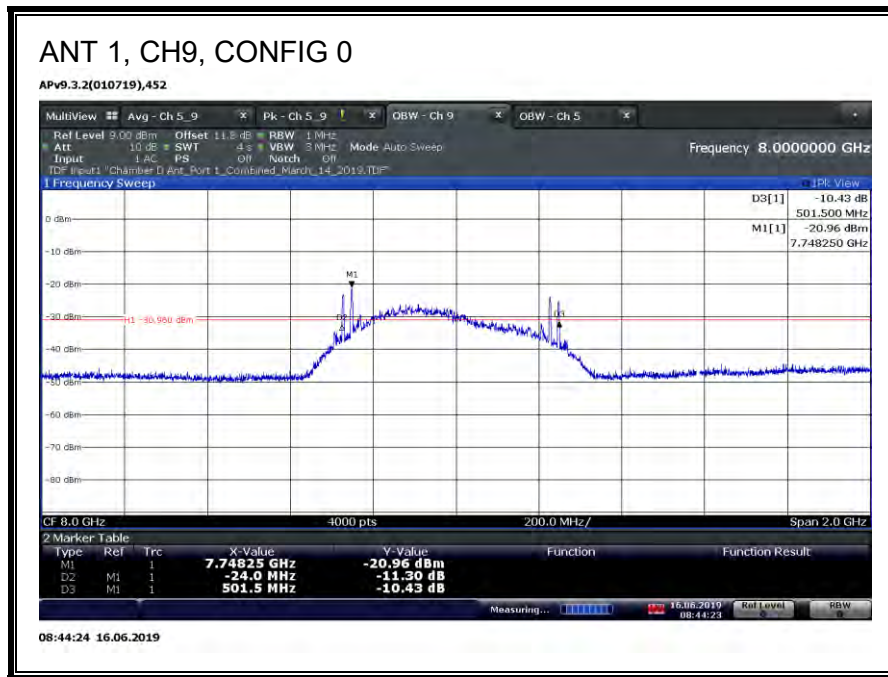


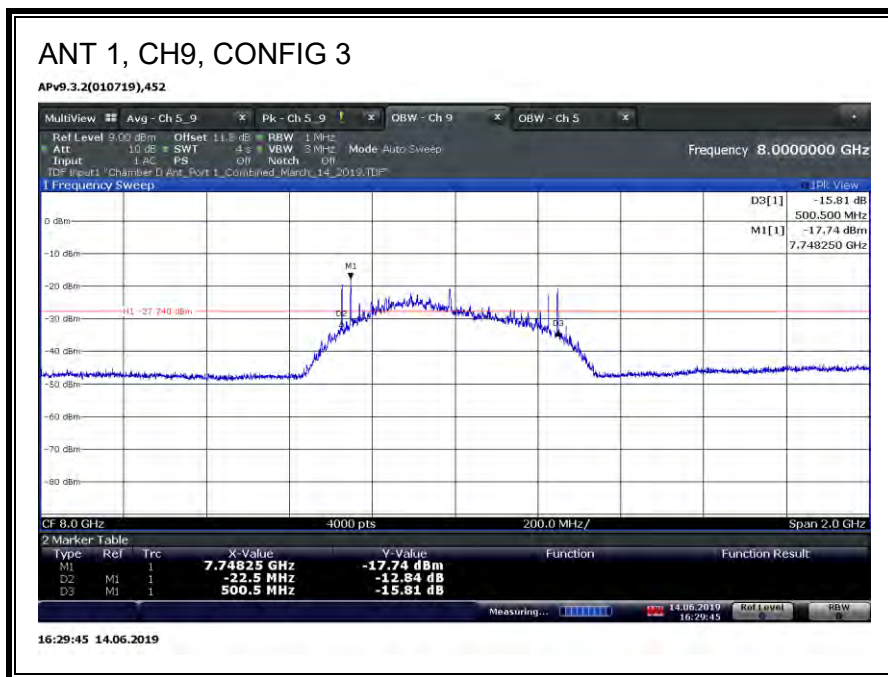
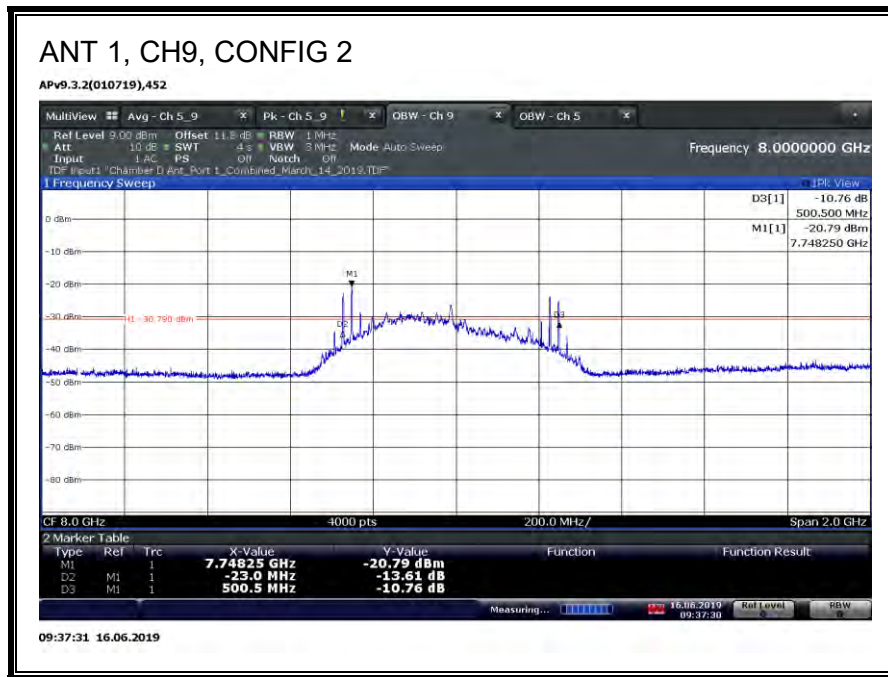


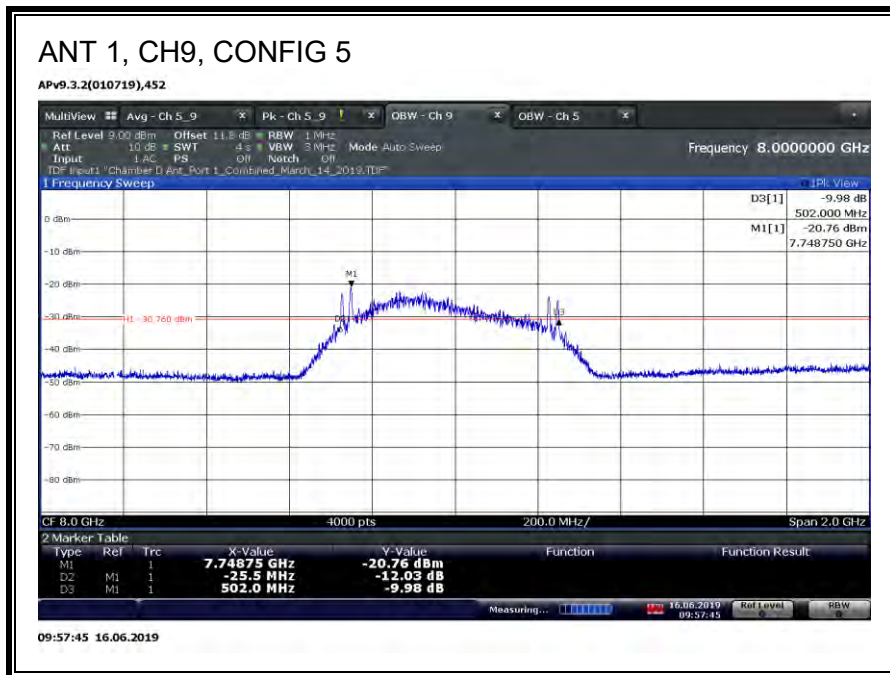
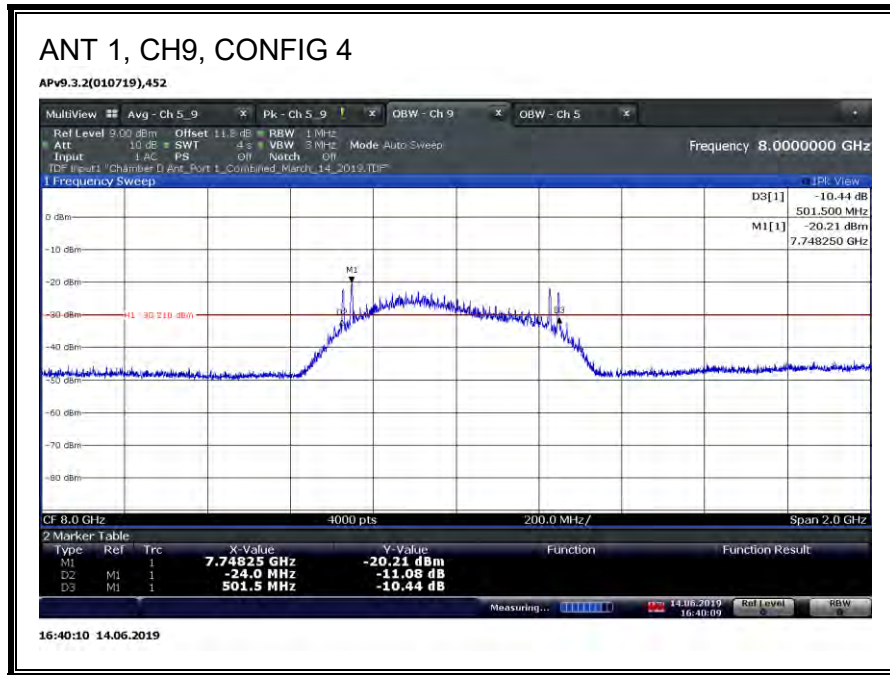


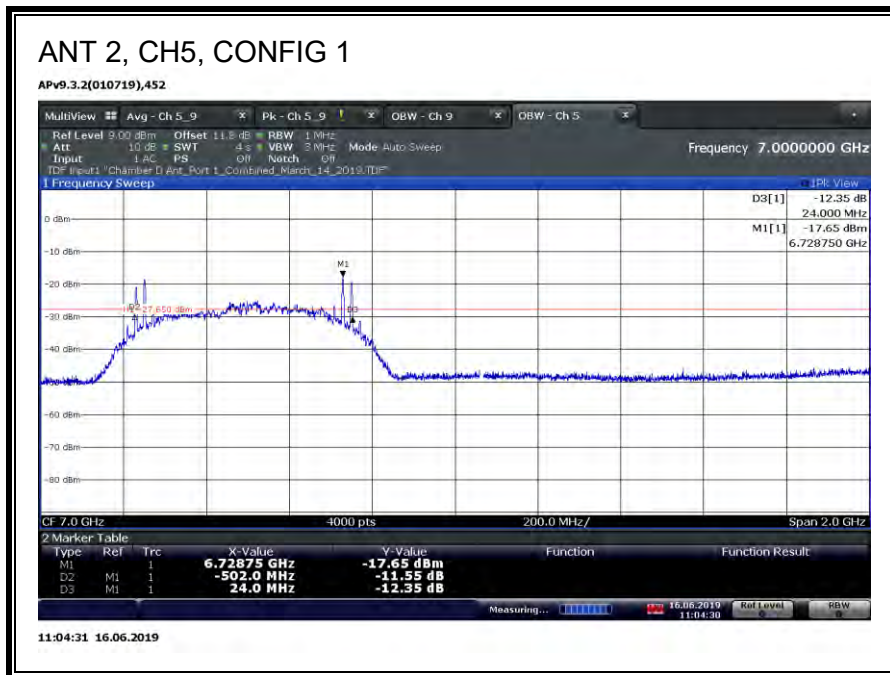
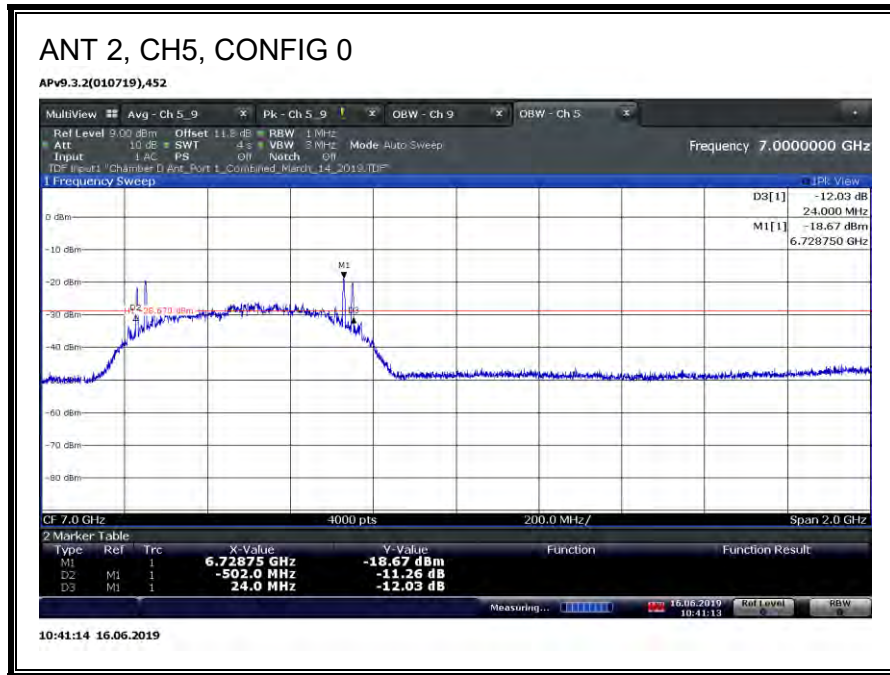


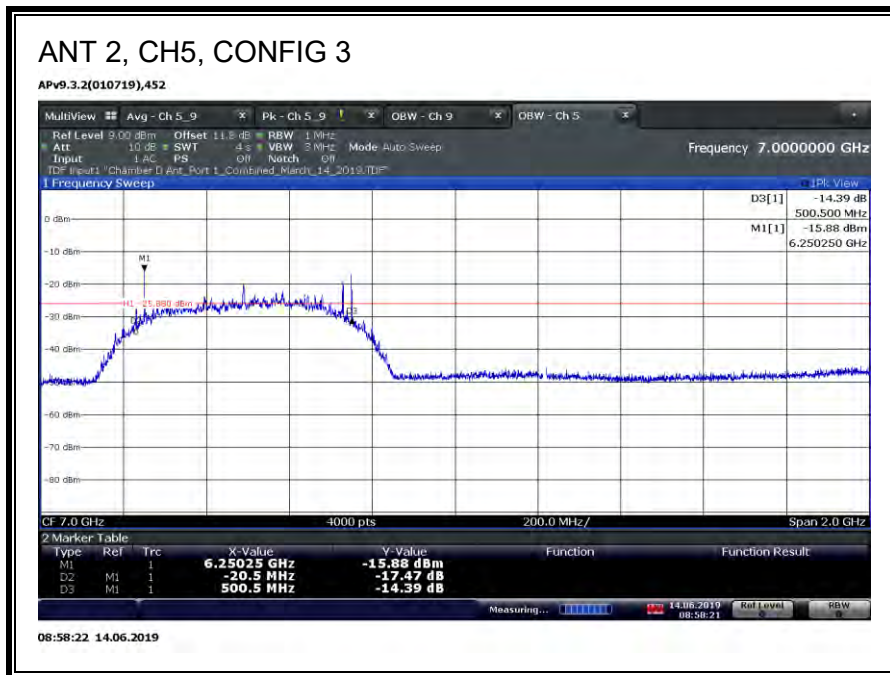
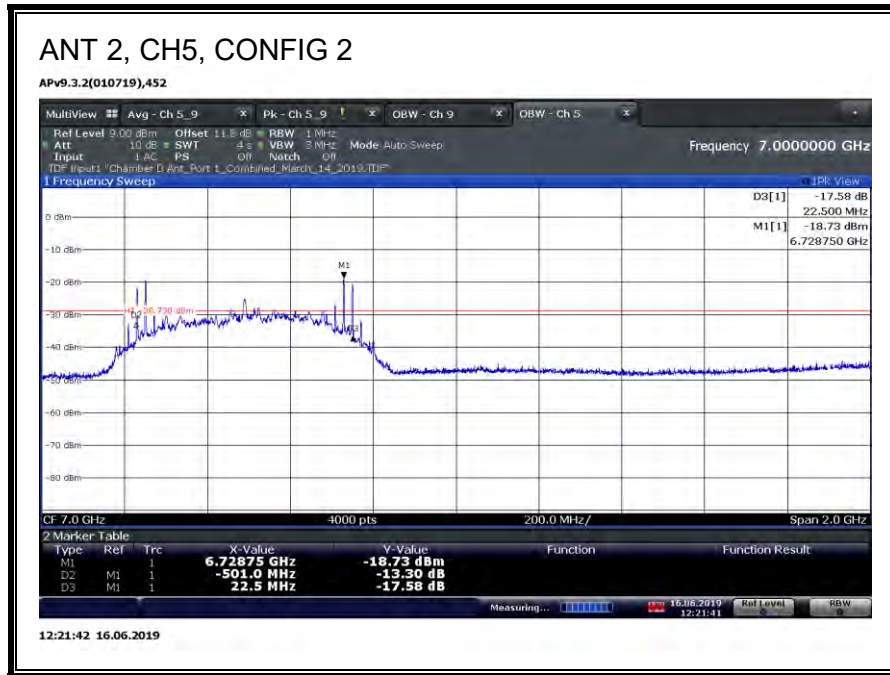


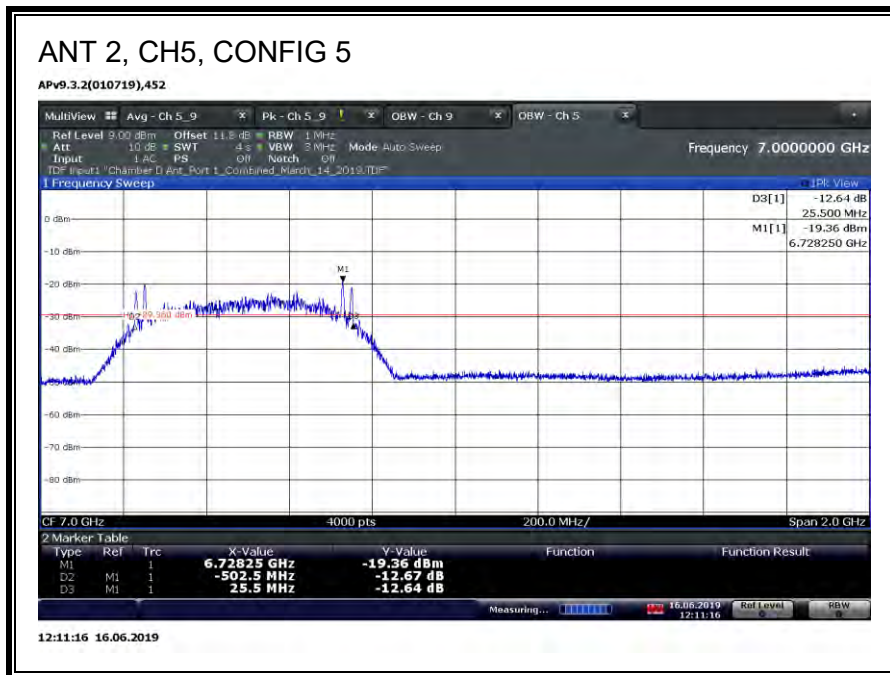
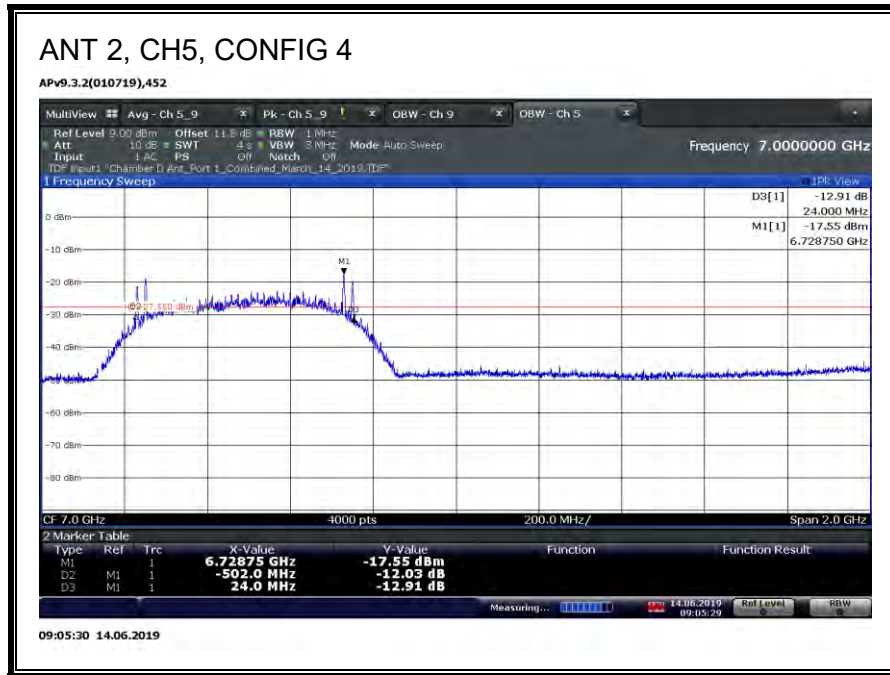


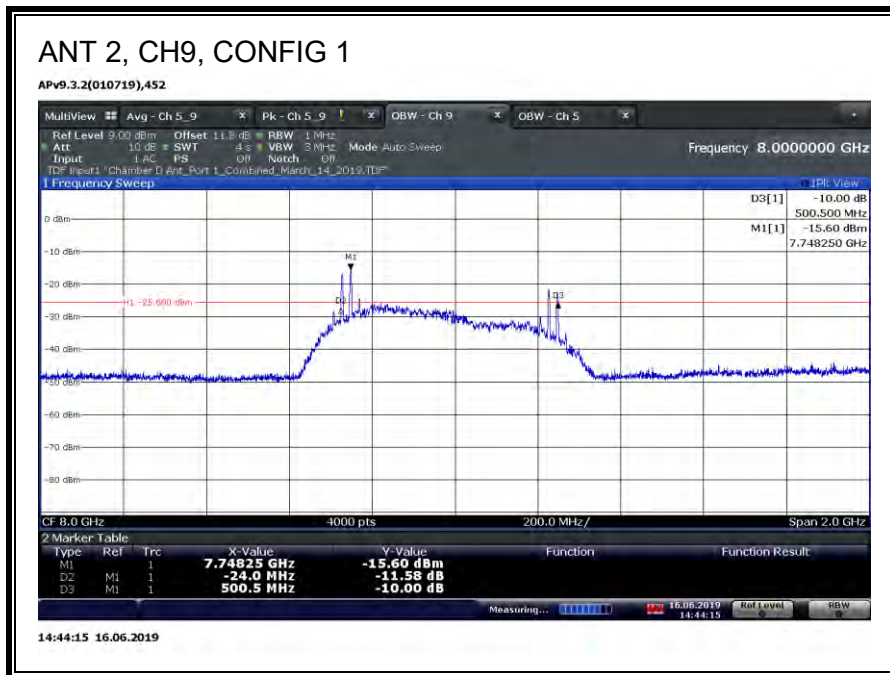
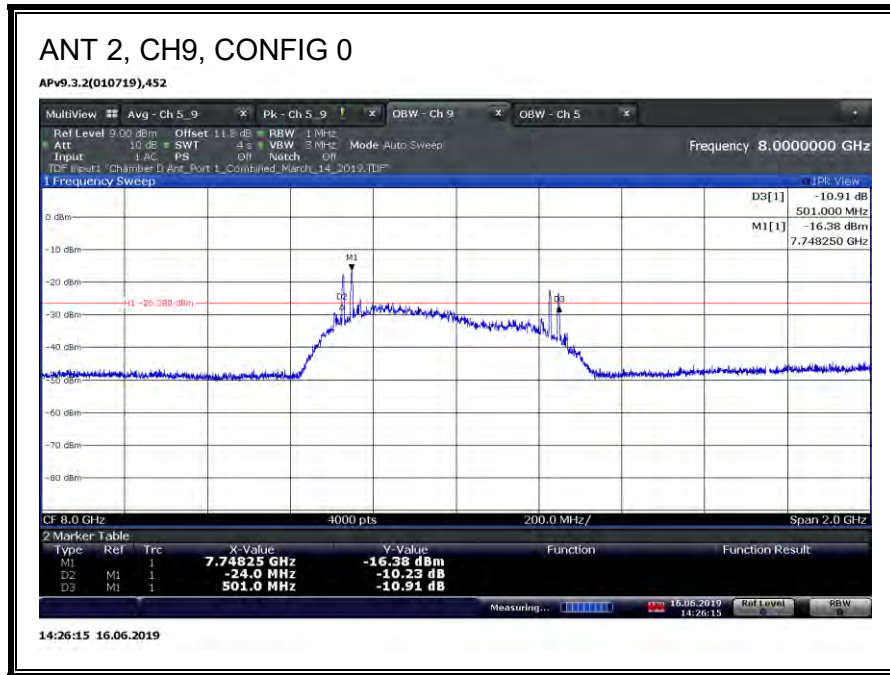


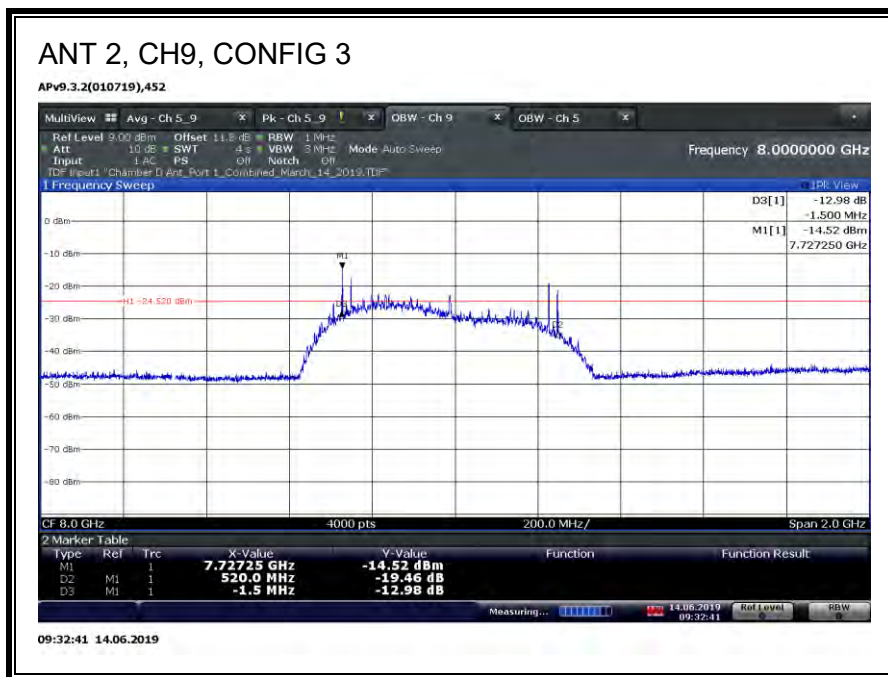
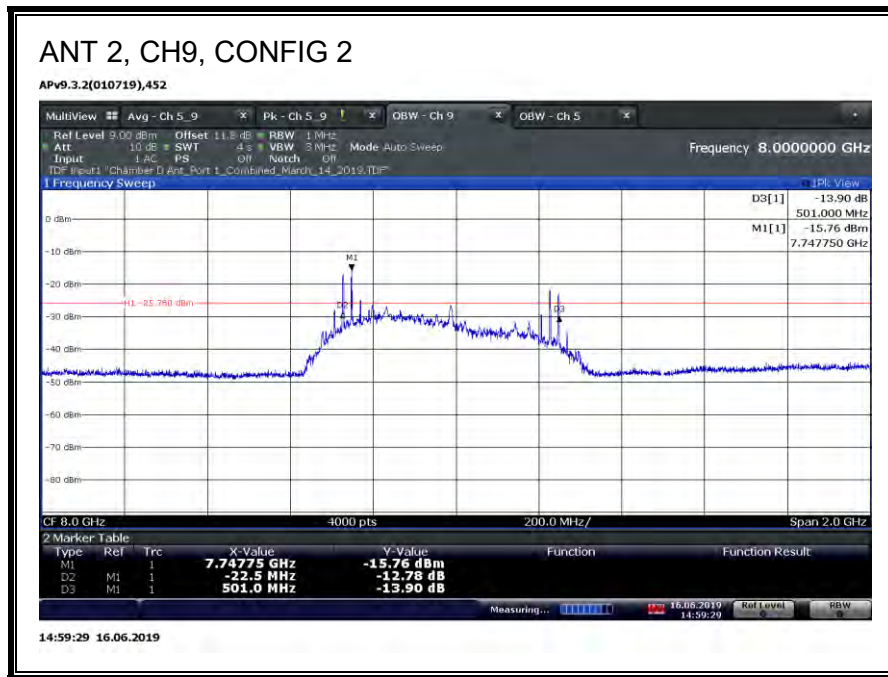


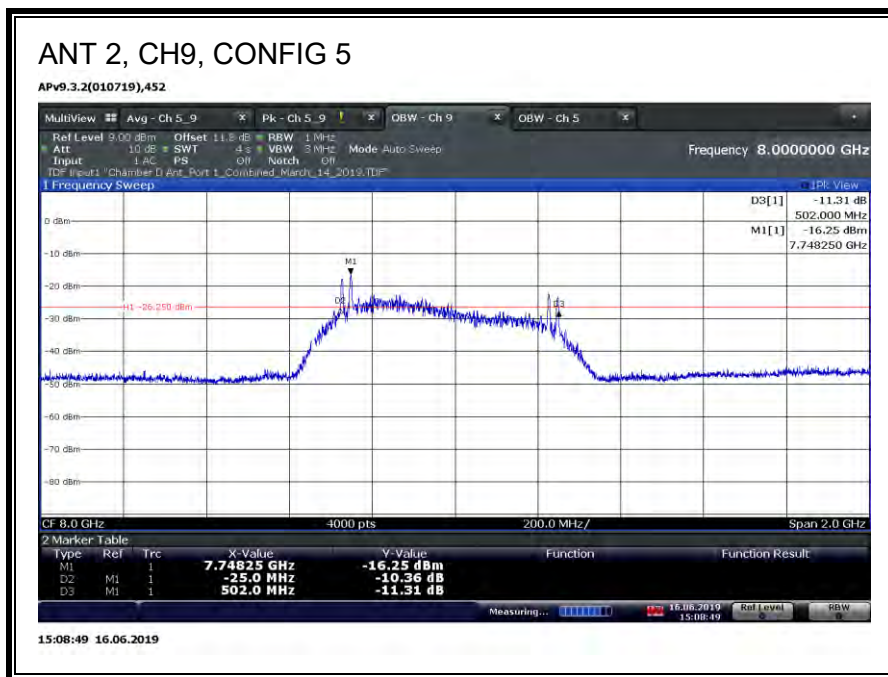
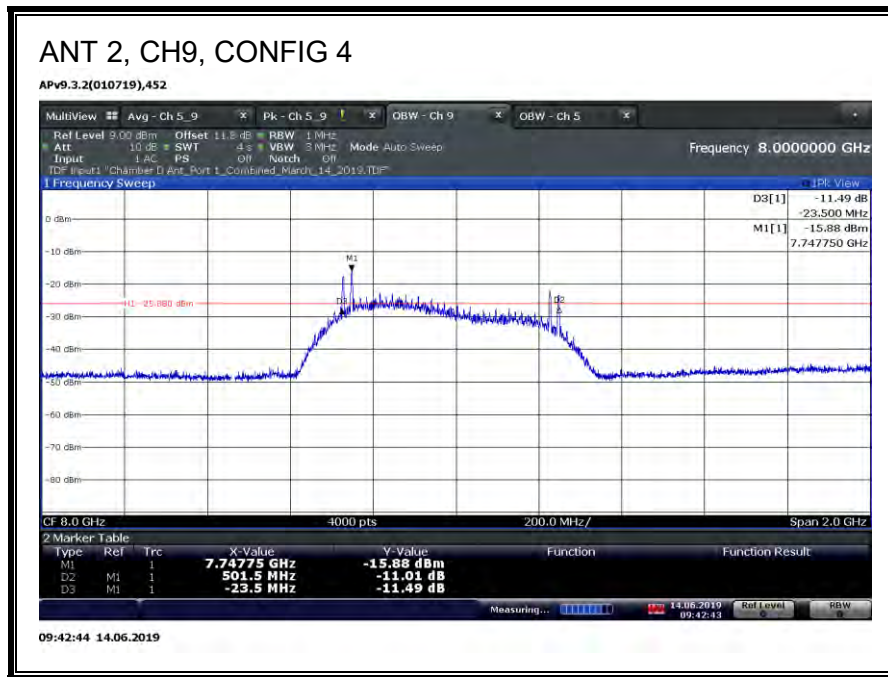


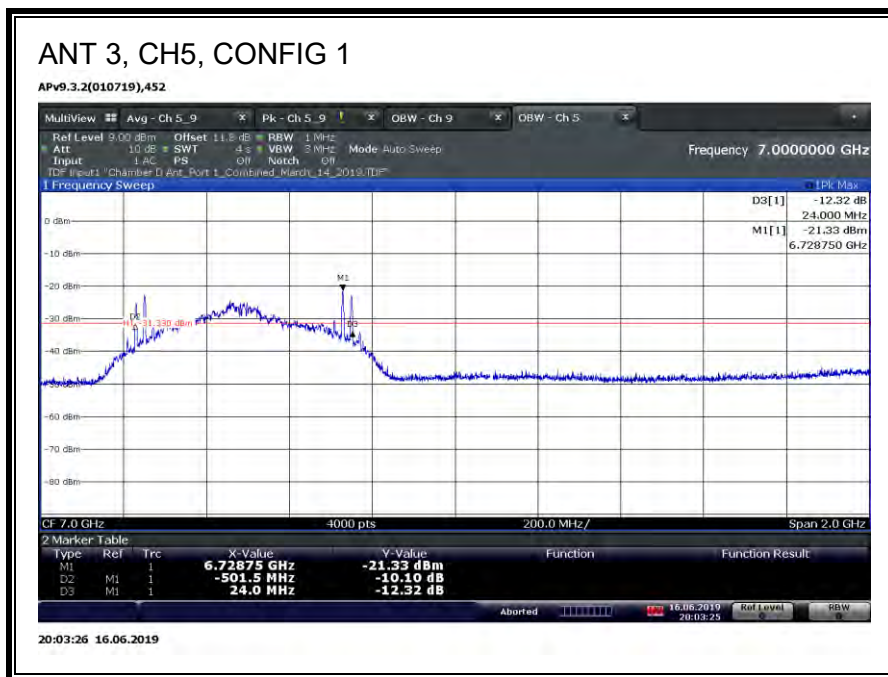
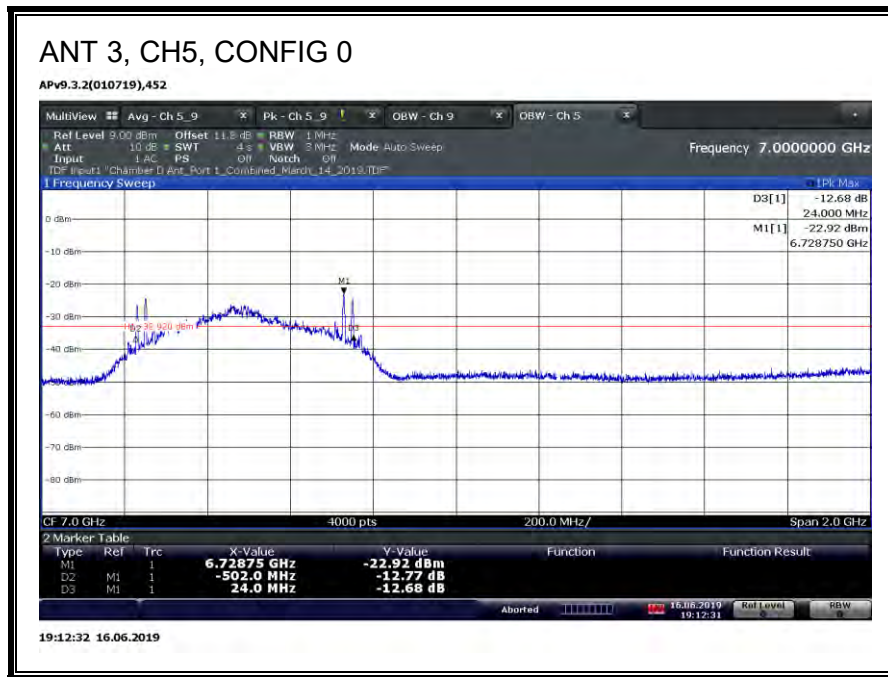


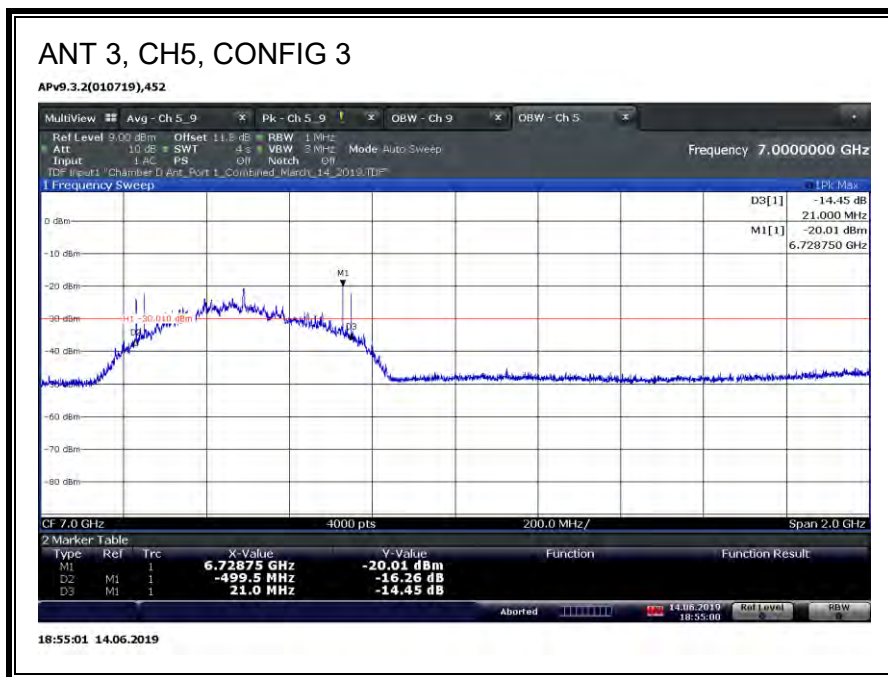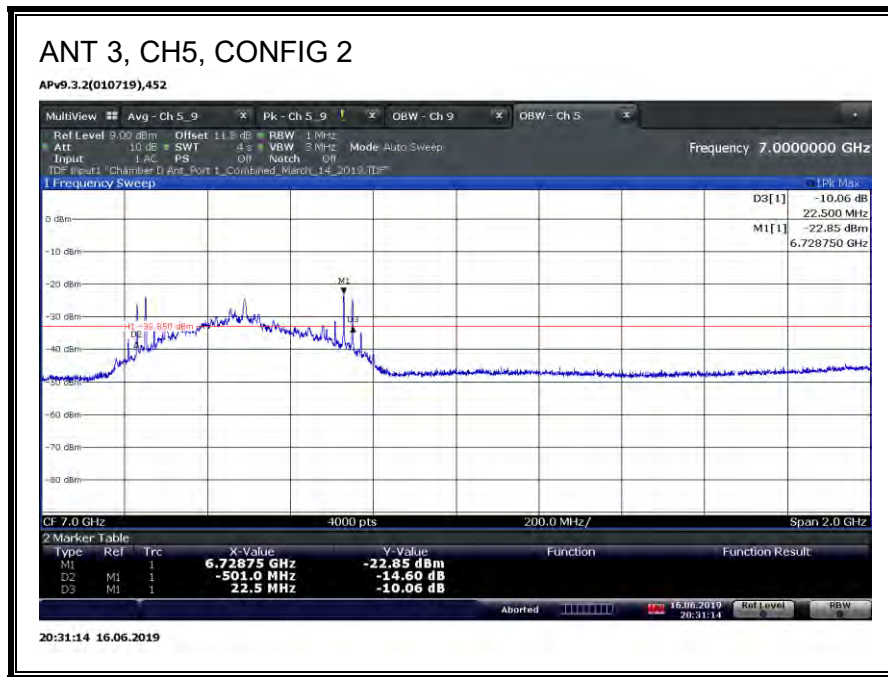

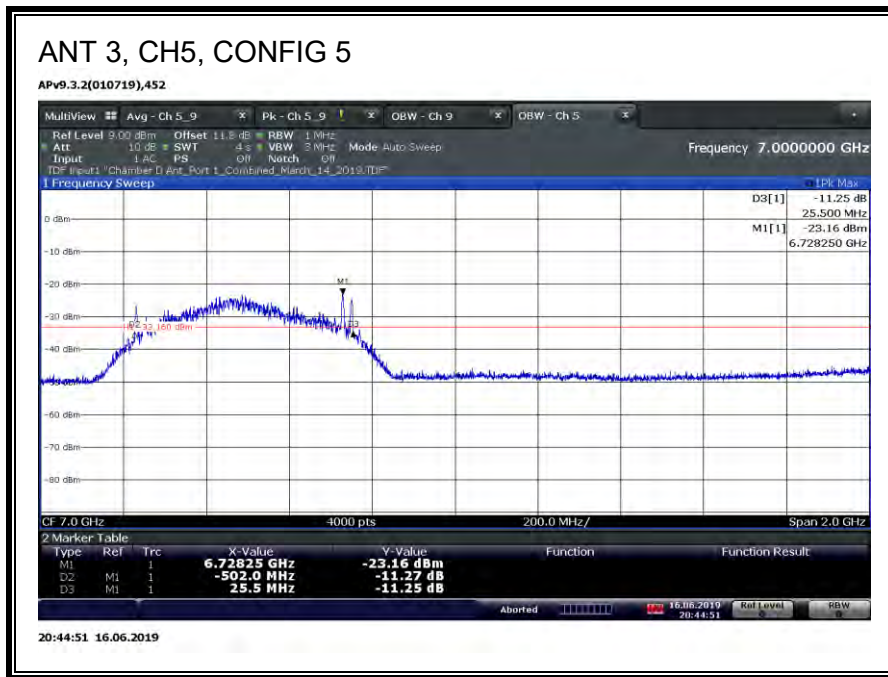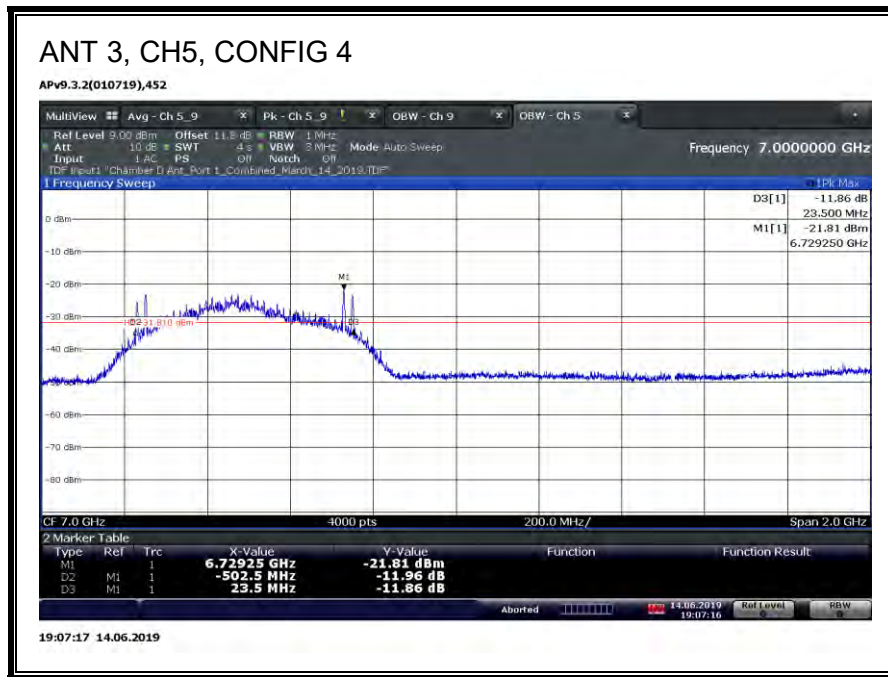

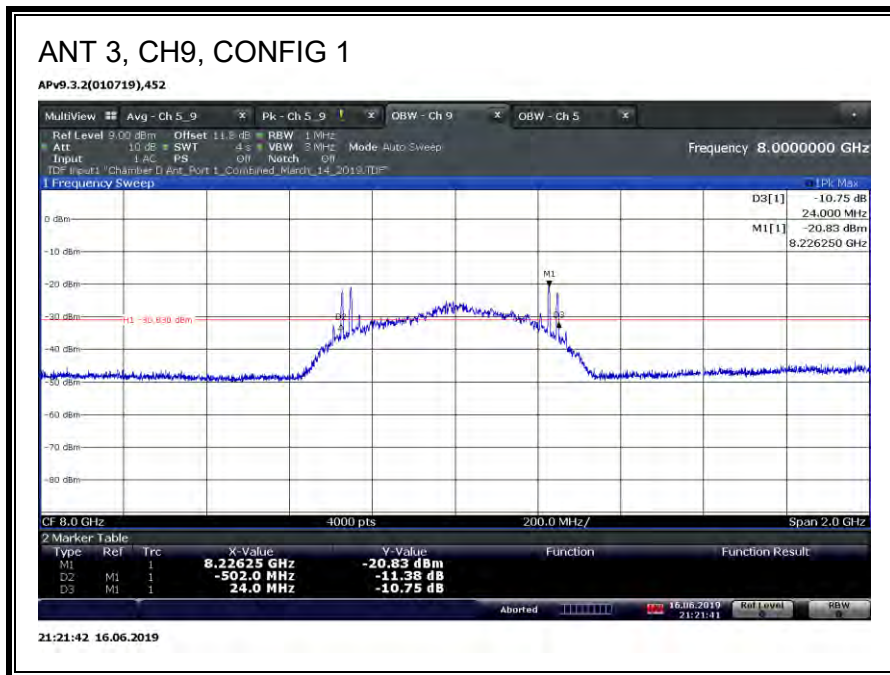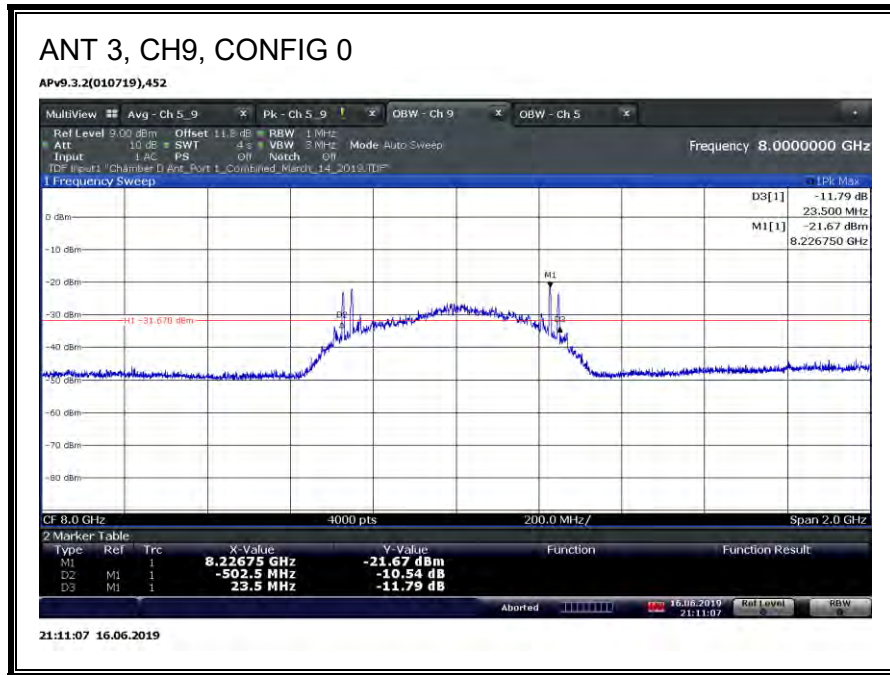

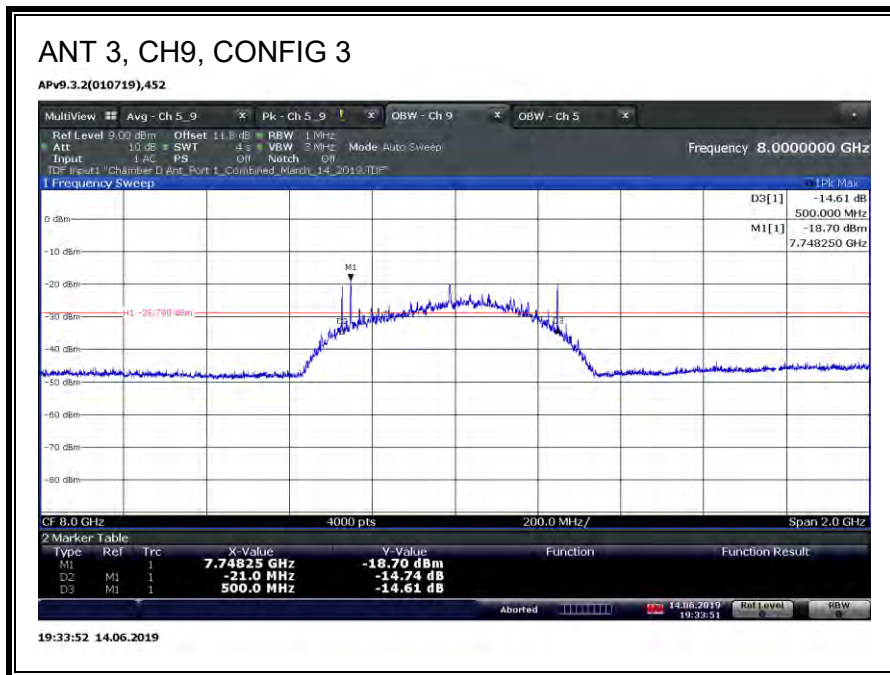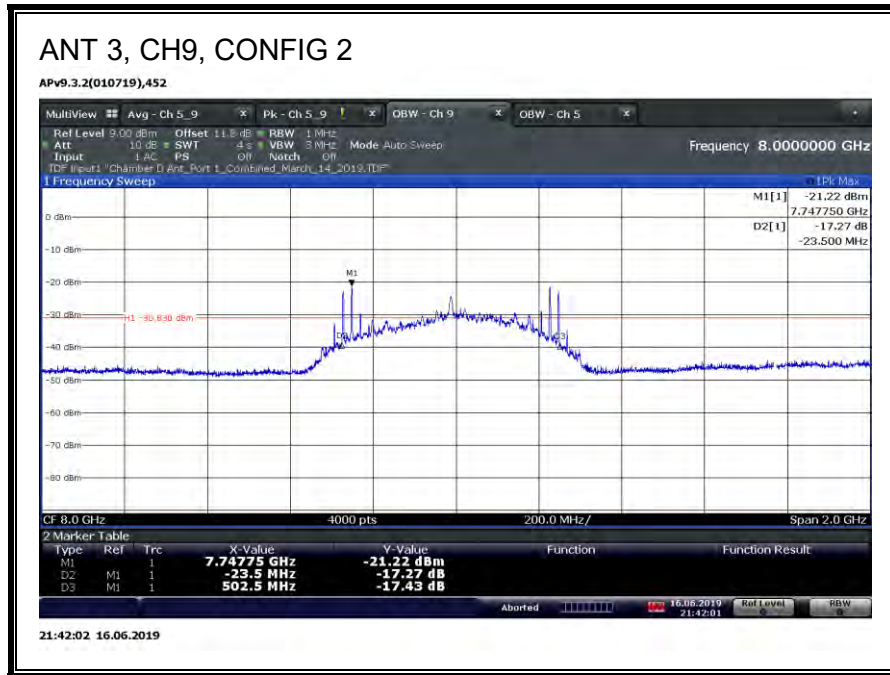

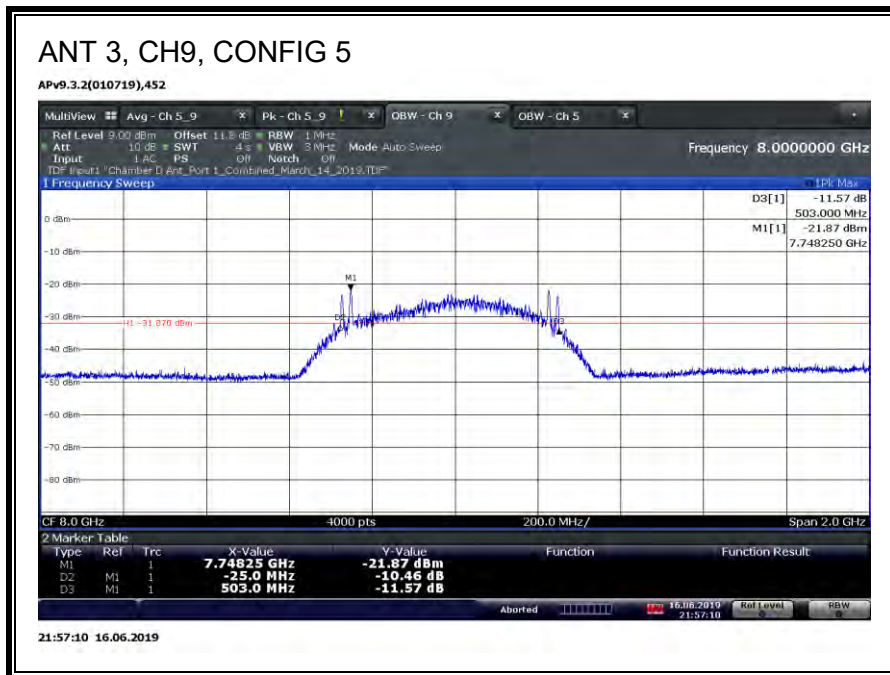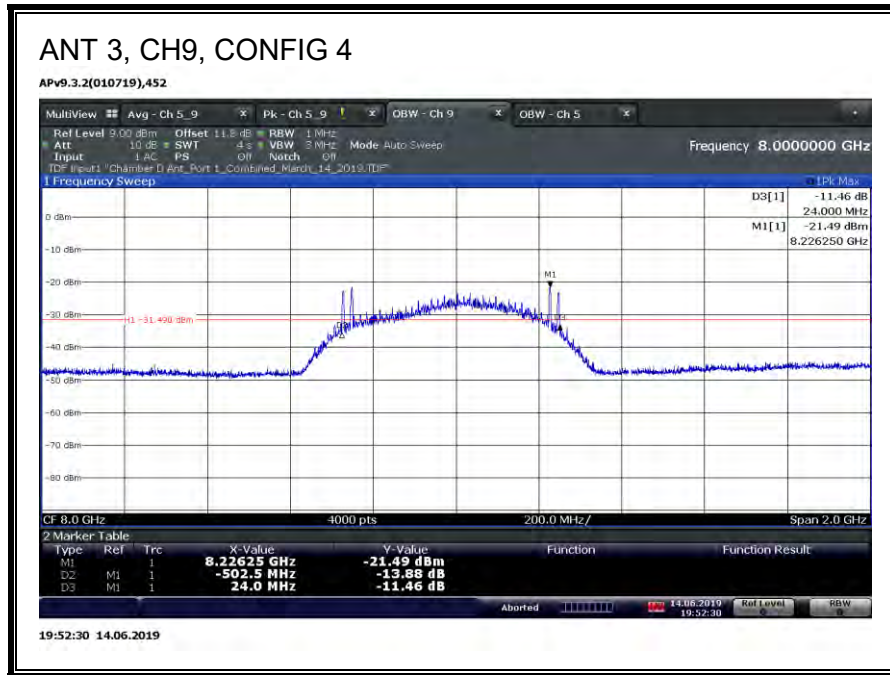

8.2. PEAK POWER AND MAXIMUM AVERAGE EMISSIONS

LIMIT

15.519 (3)(e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP.

15.519 (3)(c) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
3100 - 10600	-41.3

TEST PROCEDURE

ANSI C63.10 Clause 10.3.



Peak EIPR power is measured using RBW of 50 MHz.



The radiated emissions of 6 – 9 GHz frequency band are performed at 3 meter test distance.



RESULTS



ANT	CH	CONFIG	Payload	EUT Orientation	Meas. Ant. Polarity	Peak EIRP Power				Average EIRP Power			
						FM (GHz)	Peak Power (dBm/50MHz)	Peak Limit (0dBm/50 MHz)	Margin (dB)	FM (GHz)	Avg Power (dBm/MHz)	Avg Limit (dBm/MHz)	Margin (dB)
0	5	0	125	Portrait	H	6.4885	-2.92	0	-2.92	6.4555	-41.58	-41.3	-0.28
0	5	1	125	Portrait	H	6.4875	-2.1	0	-2.1	6.4555	-41.41	-41.3	-0.11
0	5	2	125	Portrait	H	6.4895	-6.05	0	-6.05	6.4675	-41.62	-41.3	-0.32
0	5	3	125	Portrait	H	6.4905	-6.03	0	-6.03	6.4645	-41.84	-41.3	-0.54
0	5	4	0	Portrait	H	6.4915	-8.27	0	-8.27	6.4685	-41.75	-41.3	-0.45
0	5	5	0	Portrait	H	6.4875	-6.44	0	-6.44	6.4615	-41.86	-41.3	-0.56
0	9	0	125	Portrait	H	7.9725	-2.54	0	-2.54	7.9155	-41.48	-41.3	-0.18
0	9	1	125	Portrait	H	7.9955	-2.2	0	-2.2	7.8865	-41.86	-41.3	-0.56
0	9	2	125	Portrait	H	7.9825	-5.74	0	-5.74	7.8645	-41.88	-41.3	-0.58
0	9	3	125	Portrait	H	7.9865	-5.61	0	-5.61	7.8635	-41.66	-41.3	-0.36
0	9	4	0	Portrait	H	7.7365	-6.53	0	-6.53	7.9165	-41.78	-41.3	-0.48
0	9	5	0	Portrait	H	7.9305	-5.53	0	-5.53	7.9175	-41.67	-41.3	-0.37
1	5	0	125	Portrait	H	6.4835	-2.68	0	-2.68	6.4555	-41.53	-41.3	-0.23
1	5	1	125	Portrait	H	6.4865	-1.85	0	-1.85	6.4655	-41.5	-41.3	-0.2
1	5	2	125	Portrait	H	6.4905	-6.12	0	-6.12	6.4675	-41.68	-41.3	-0.38
1	5	3	125	Portrait	H	6.4865	-5.25	0	-5.25	6.4625	-41.48	-41.3	-0.18
1	5	4	0	Portrait	H	6.4865	-8.02	0	-8.02	6.4685	-41.99	-41.3	-0.69
1	5	5	0	Portrait	H	6.4865	-6.07	0	-6.07	6.4555	-41.46	-41.3	-0.16
1	9	0	125	Portrait	H	7.9775	-3.65	0	-3.65	7.8865	-41.5	-41.3	-0.2
1	9	1	125	Portrait	H	7.8835	-3.01	0	-3.01	7.8855	-41.77	-41.3	-0.47
1	9	2	125	Portrait	H	7.9895	-6.54	0	-6.54	7.8635	-41.66	-41.3	-0.36
1	9	3	125	Portrait	H	7.9785	-6.24	0	-6.24	7.8635	-41.35	-41.3	-0.05
1	9	4	0	Portrait	H	7.7315	-6.83	0	-6.83	7.9165	-41.69	-41.3	-0.39
1	9	5	0	Portrait	H	7.7345	-4.87	0	-4.87	7.8905	-41.46	-41.3	-0.16
2	5	0	125	Portrait	H	6.4885	-2.98	0	-2.98	6.5605	-41.42	-41.3	-0.12
2	5	1	125	Portrait	H	6.4895	-1.79	0	-1.79	6.5615	-41.31	-41.3	-0.01
2	5	2	125	Portrait	H	6.4885	-6.32	0	-6.32	6.5625	-41.74	-41.3	-0.44
2	5	3	125	Portrait	H	6.4855	-5.43	0	-5.43	6.5145	-41.48	-41.3	-0.18
2	5	4	0	Portrait	H	6.7355	-4.84	0	-4.84	6.5605	-41.37	-41.3	-0.07
2	5	5	0	Portrait	H	6.7365	-4.07	0	-4.07	6.5595	-41.66	-41.3	-0.36
2	9	0	125	Portrait	H	7.7375	-3.08	0	-3.08	7.8215	-41.65	-41.3	-0.35
2	9	1	125	Portrait	H	7.7315	-2.17	0	-2.17	7.8215	-41.53	-41.3	-0.23
2	9	2	125	Portrait	H	7.7365	-6.84	0	-6.84	7.8225	-41.32	-41.3	-0.02
2	9	3	125	Portrait	H	7.7425	-7.06	0	-7.06	7.8635	-41.59	-41.3	-0.29
2	9	4	0	Portrait	H	7.7375	-3.06	0	-3.06	7.8205	-41.68	-41.3	-0.38
2	9	5	0	Portrait	H	7.7315	-0.97	0	-0.97	7.8165	-41.74	-41.3	-0.44
3	5	0	125	Portrait	H	6.4915	-3.29	0	-3.29	6.4555	-41.91	-41.3	-0.61
3	5	1	125	Portrait	H	6.4885	-1.77	0	-1.77	6.4655	-41.49	-41.3	-0.19
3	5	2	125	Portrait	H	6.4865	-6	0	-6	6.4595	-41.83	-41.3	-0.53
3	5	3	125	Portrait	H	6.4865	-6.12	0	-6.12	6.4625	-41.58	-41.3	-0.28
3	5	4	0	Portrait	H	6.7385	-7.94	0	-7.94	6.4695	-41.68	-41.3	-0.38
3	5	5	0	Portrait	H	6.4885	-6.68	0	-6.68	6.4615	-41.88	-41.3	-0.58
3	9	0	125	Portrait	H	7.9895	-3.05	0	-3.05	8.0115	-41.86	-41.3	-0.56
3	9	1	125	Portrait	H	7.9875	-1.73	0	-1.73	8.0115	-41.69	-41.3	-0.39
3	9	2	125	Portrait	H	7.9885	-4.6	0	-4.6	8.0105	-41.7	-41.3	-0.4
3	9	3	125	Portrait	H	7.9985	-5.14	0	-5.14	8.0255	-41.44	-41.3	-0.14
3	9	4	0	Portrait	H	7.7465	-7.12	0	-7.12	8.0295	-41.76	-41.3	-0.46
3	9	5	0	Portrait	H	7.9915	-5.61	0	-5.61	8.0275	-41.71	-41.3	-0.41



RESULTS

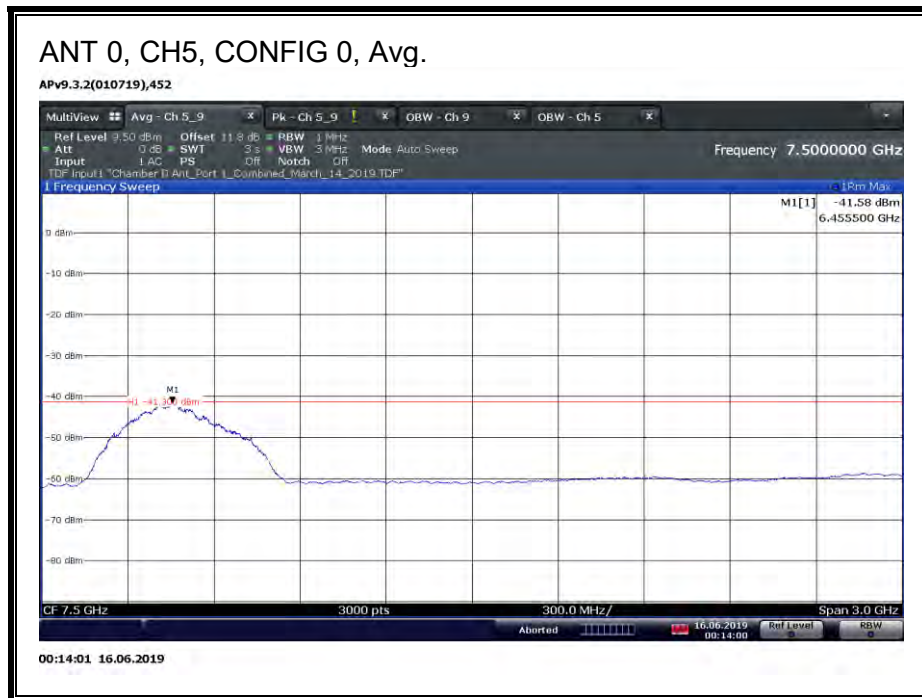
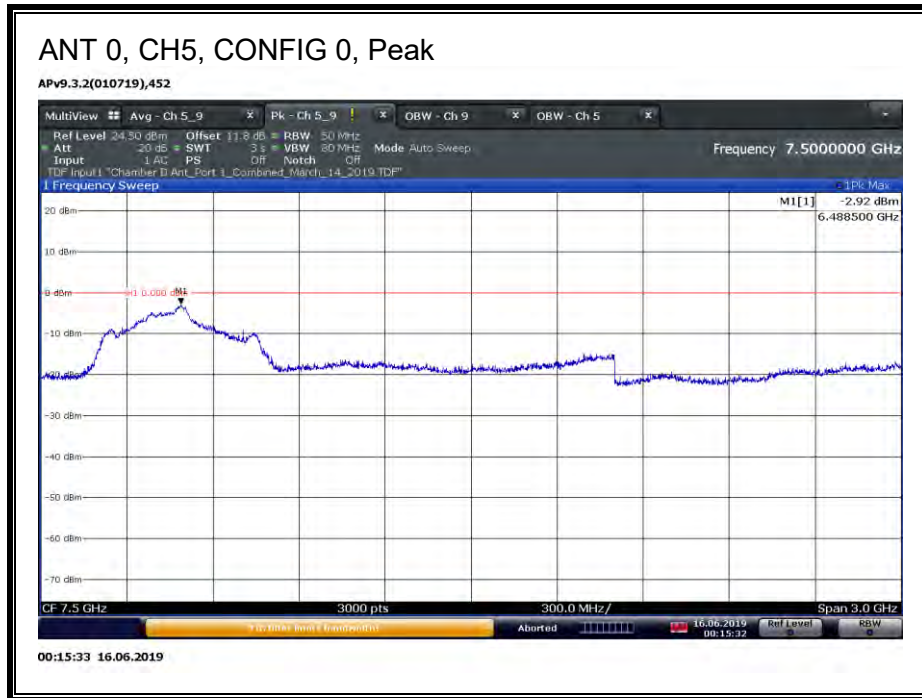


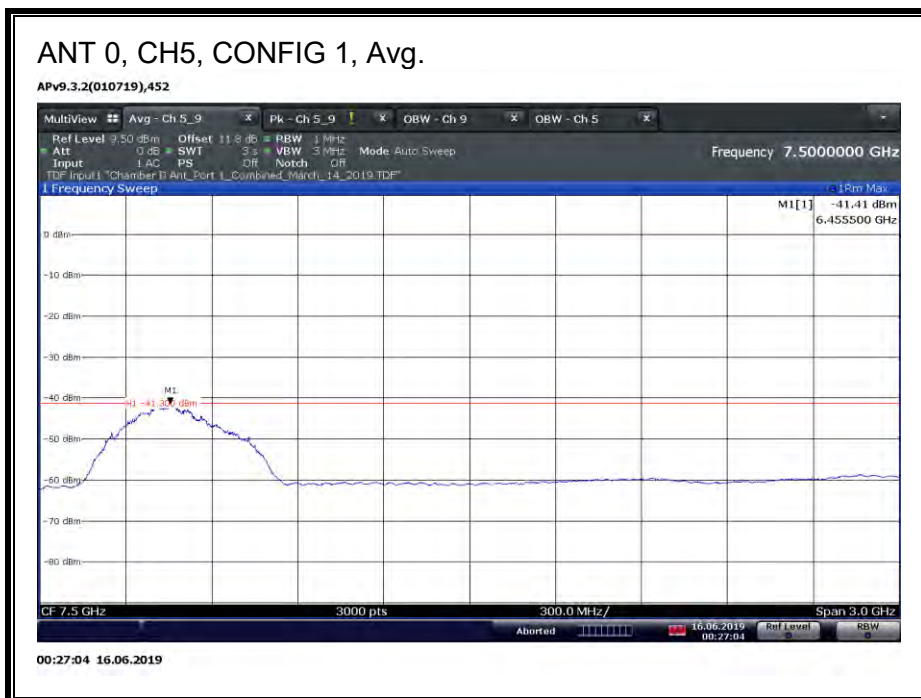
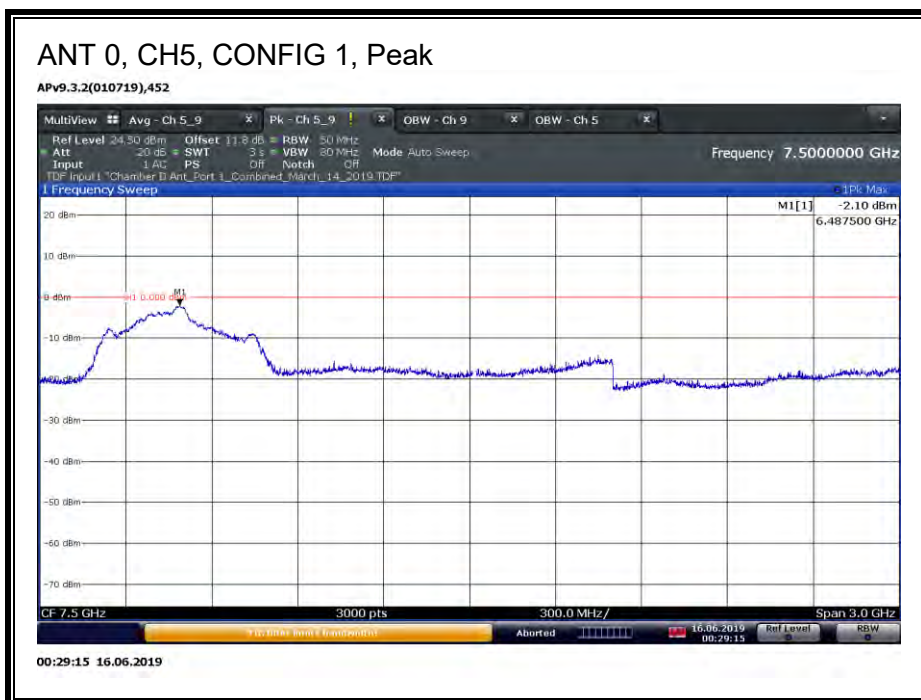


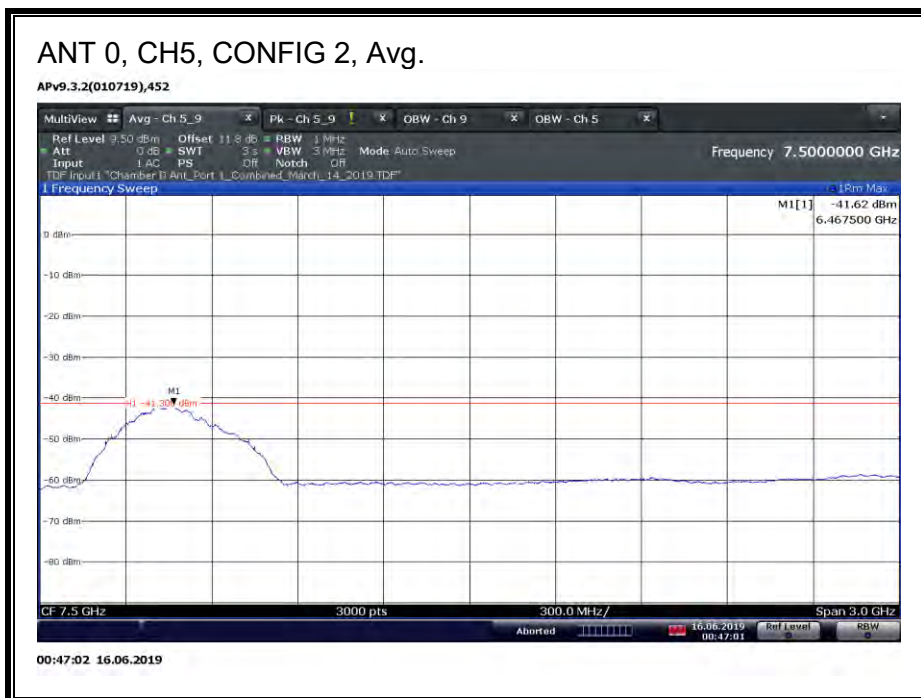
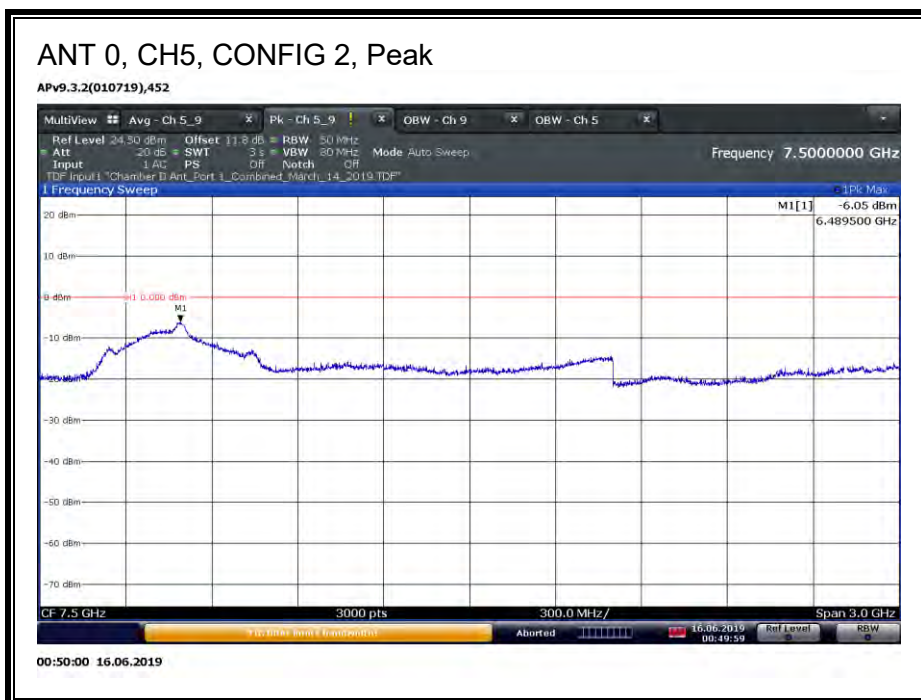


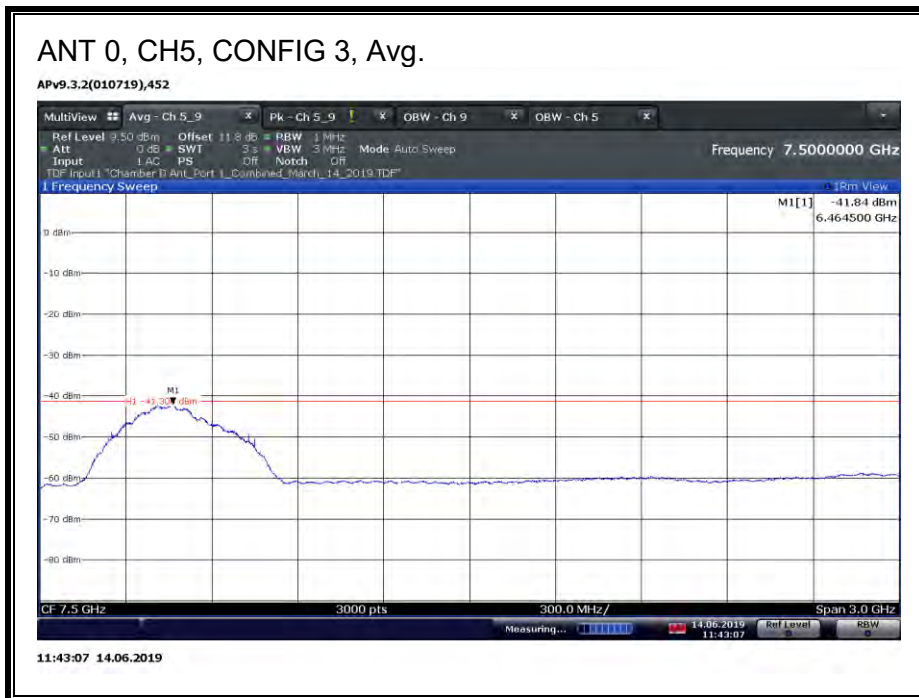
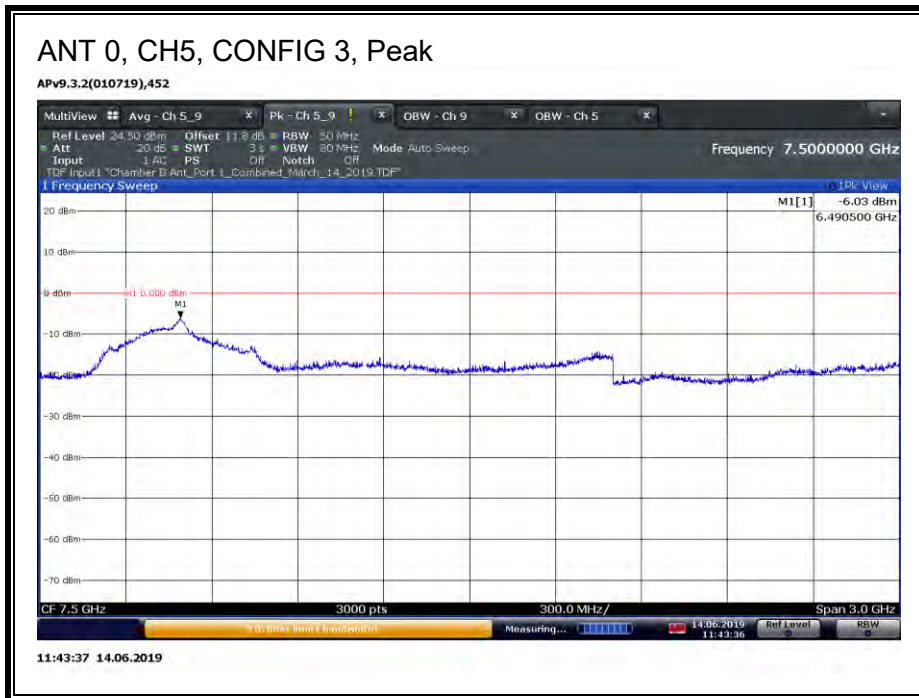


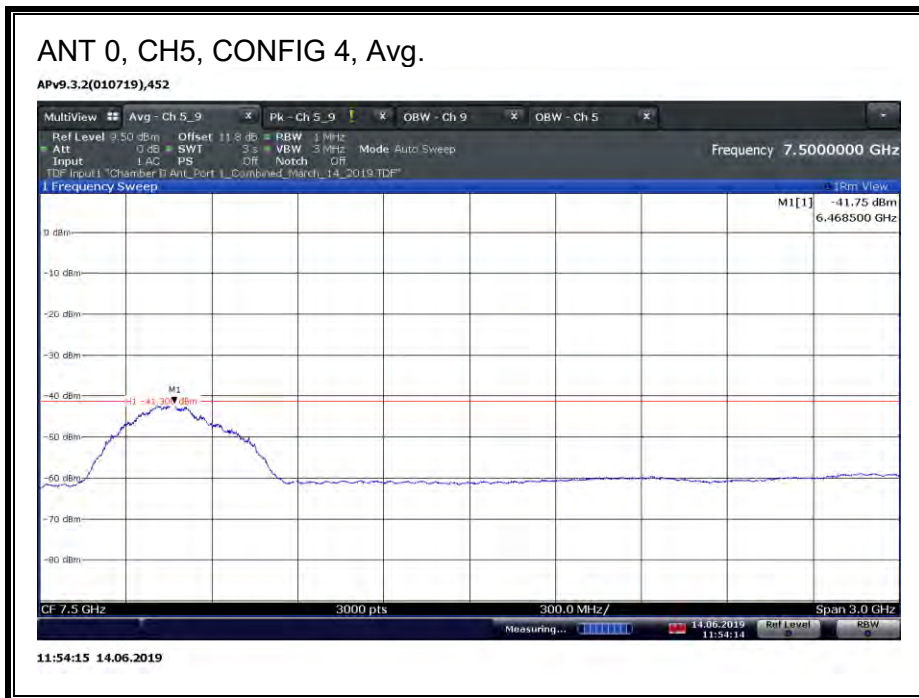
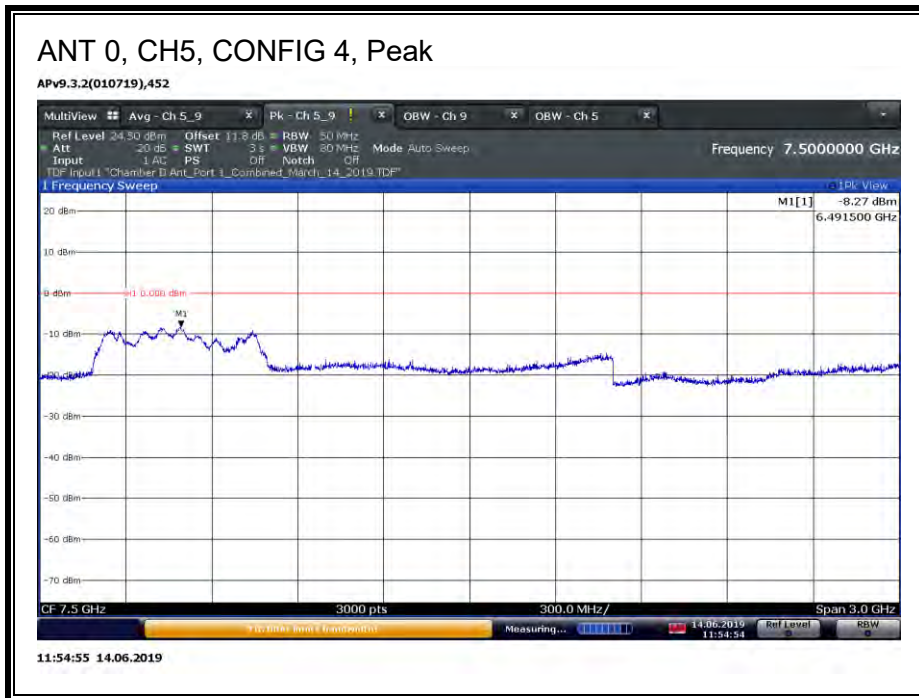


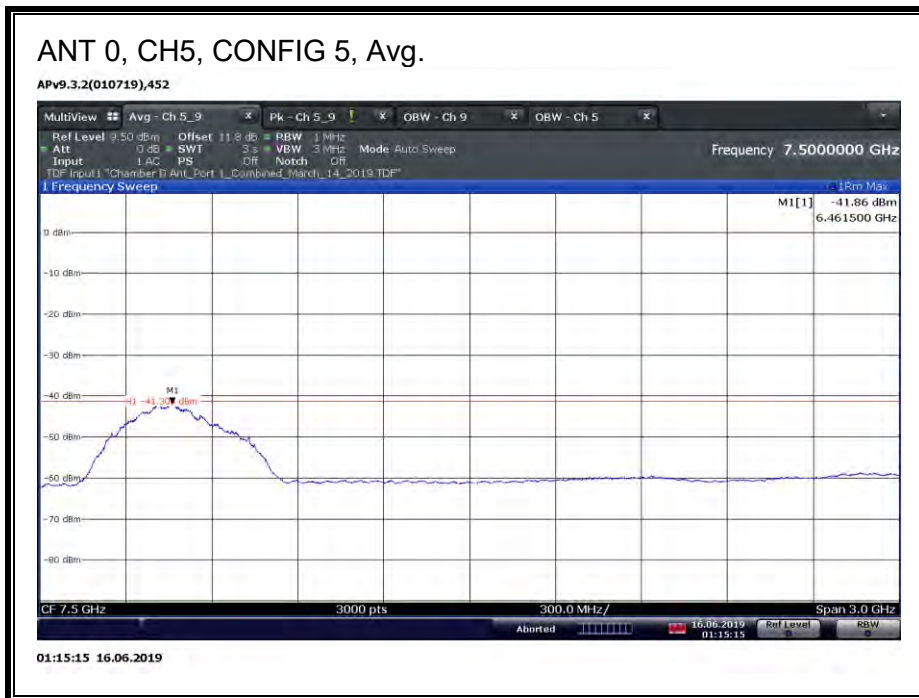
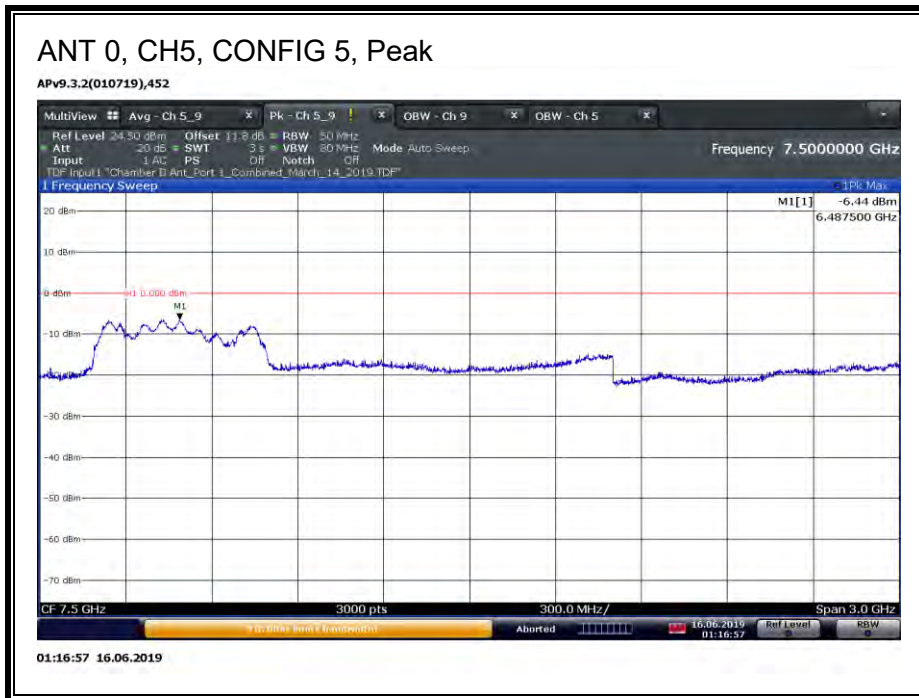


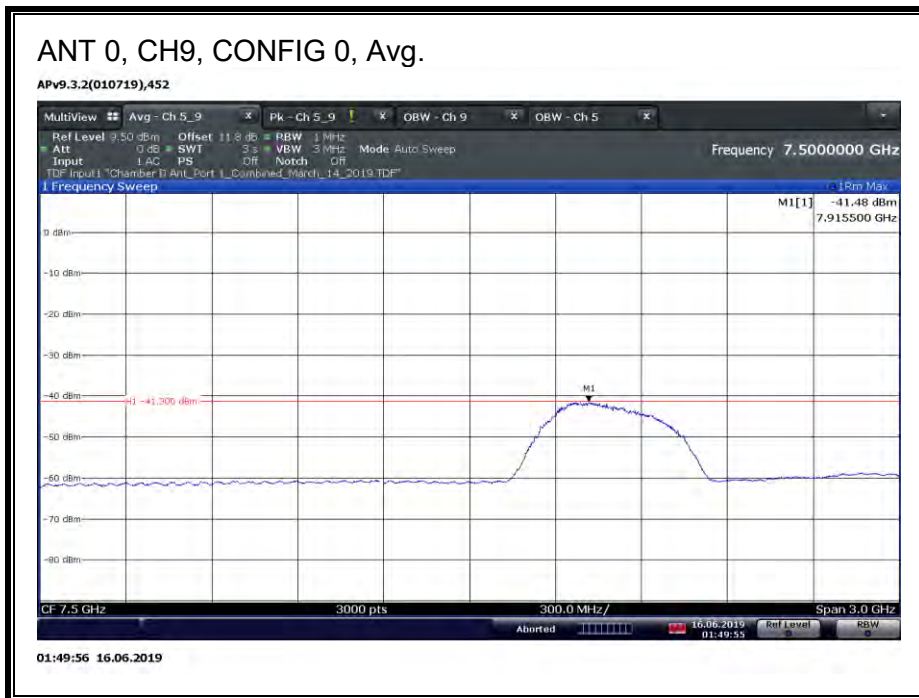
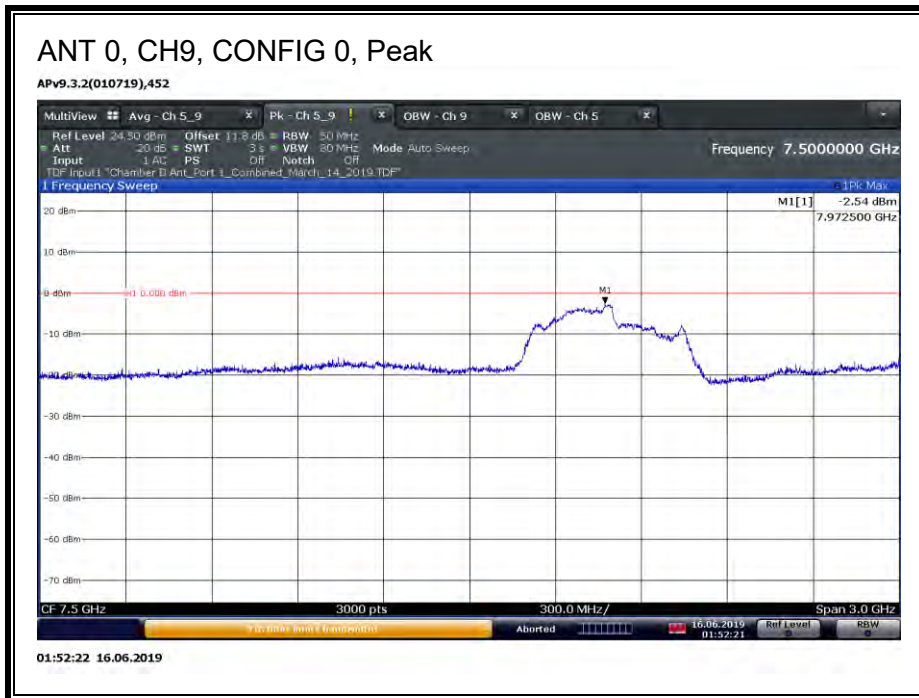


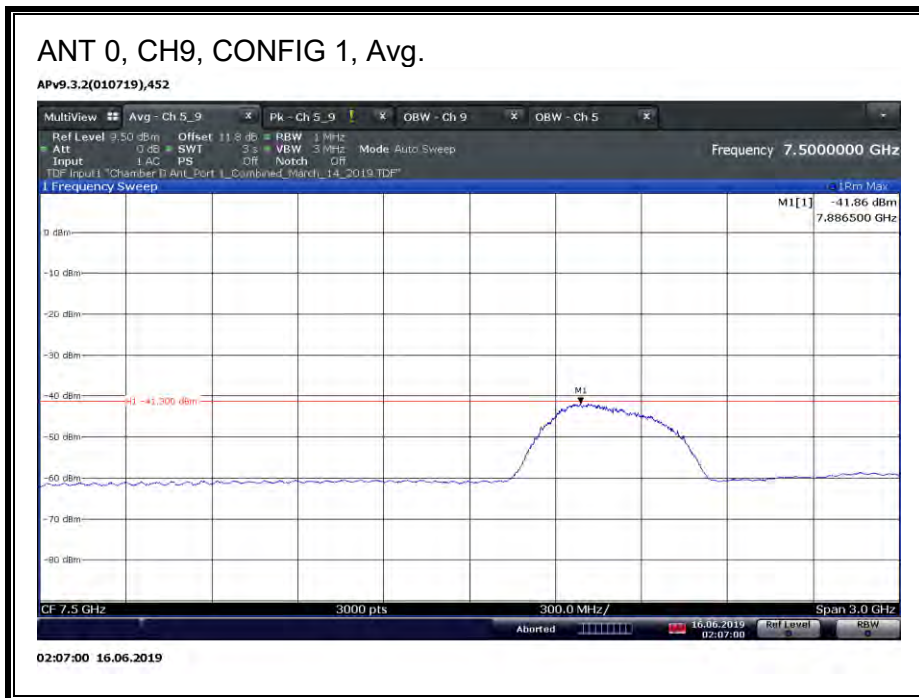
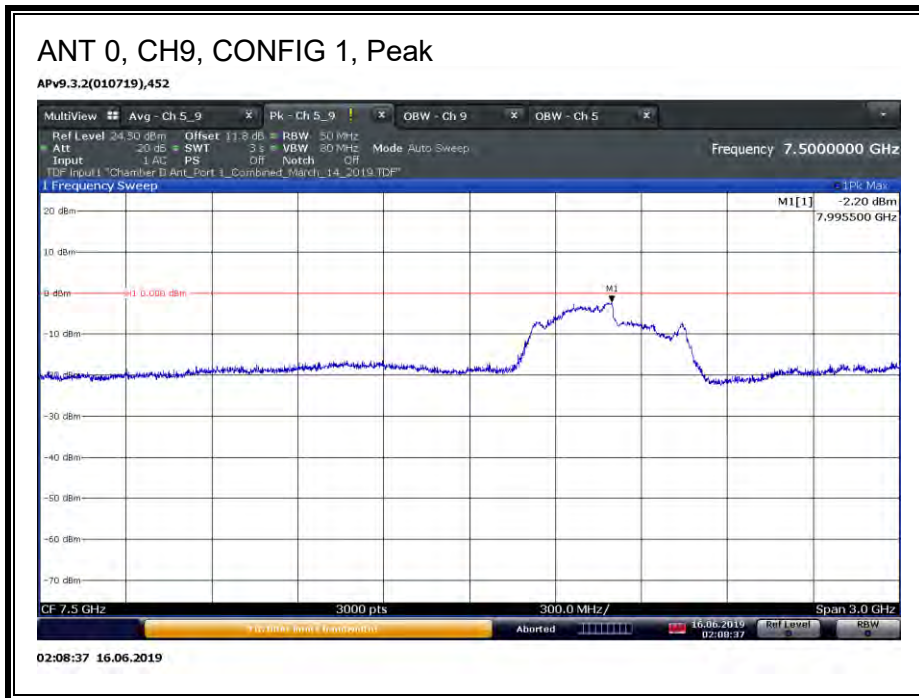


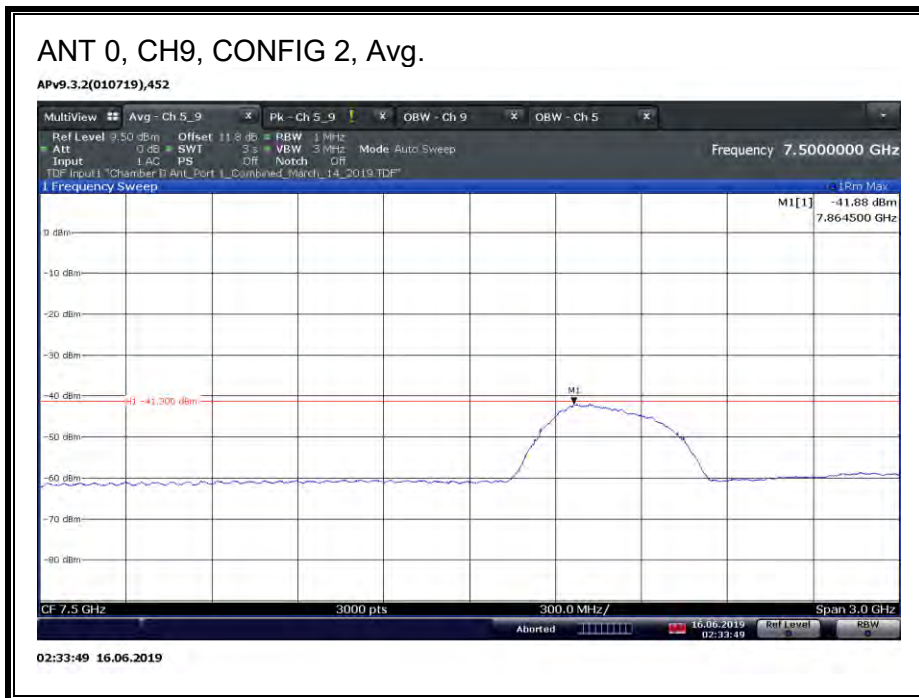
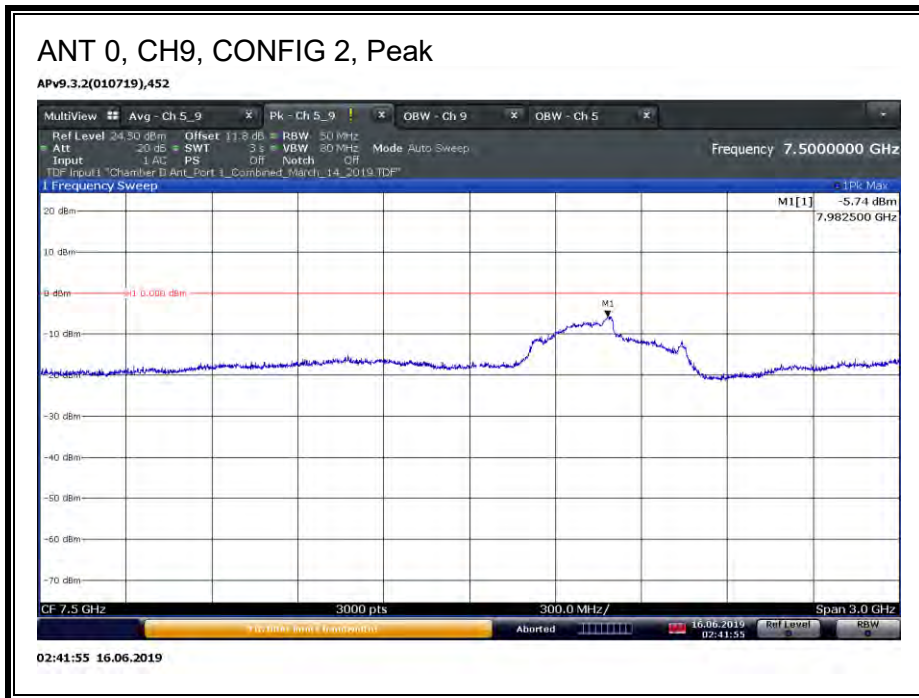


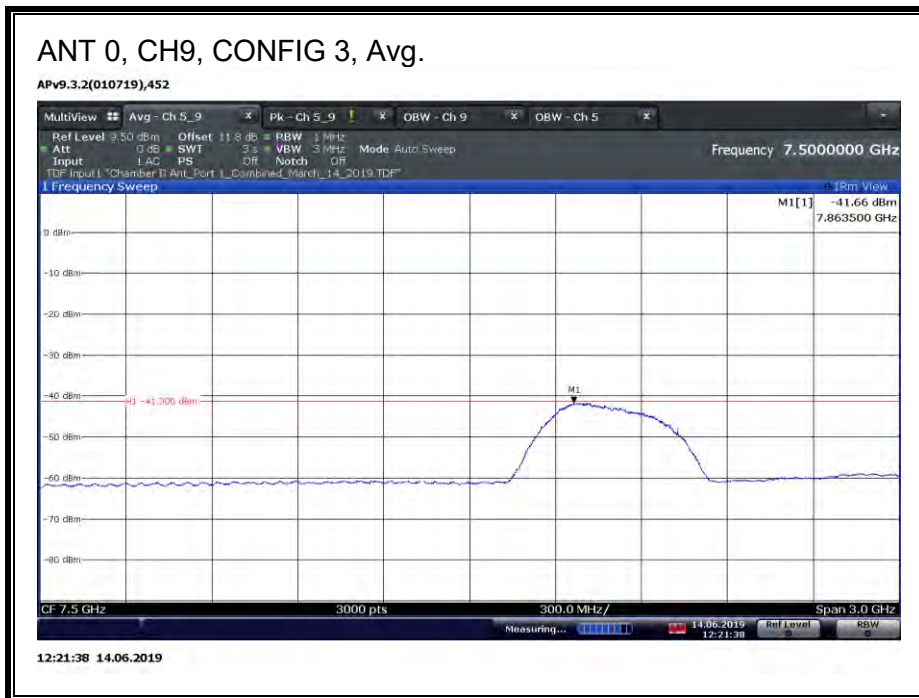
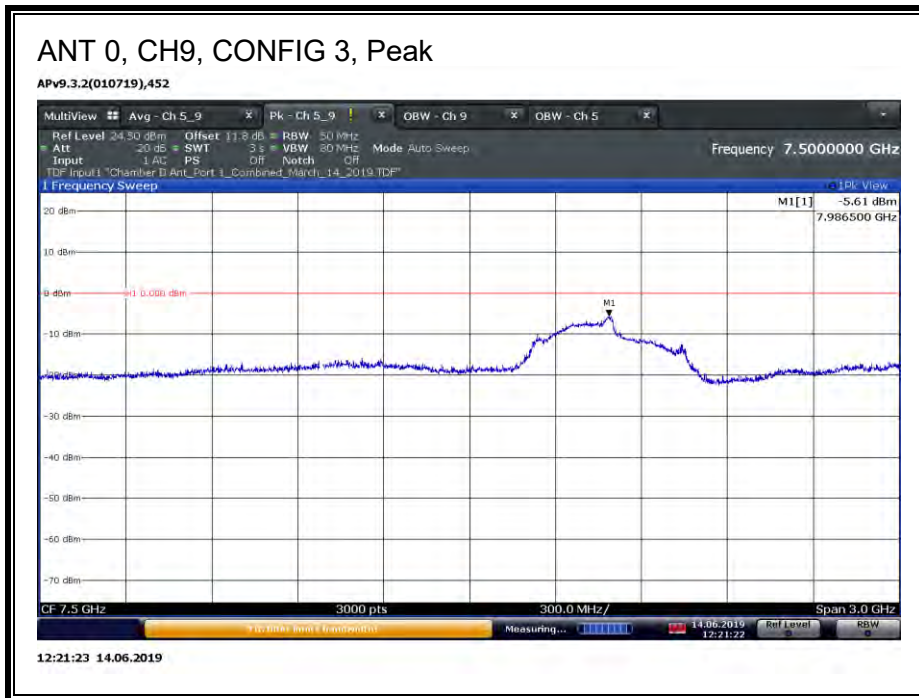


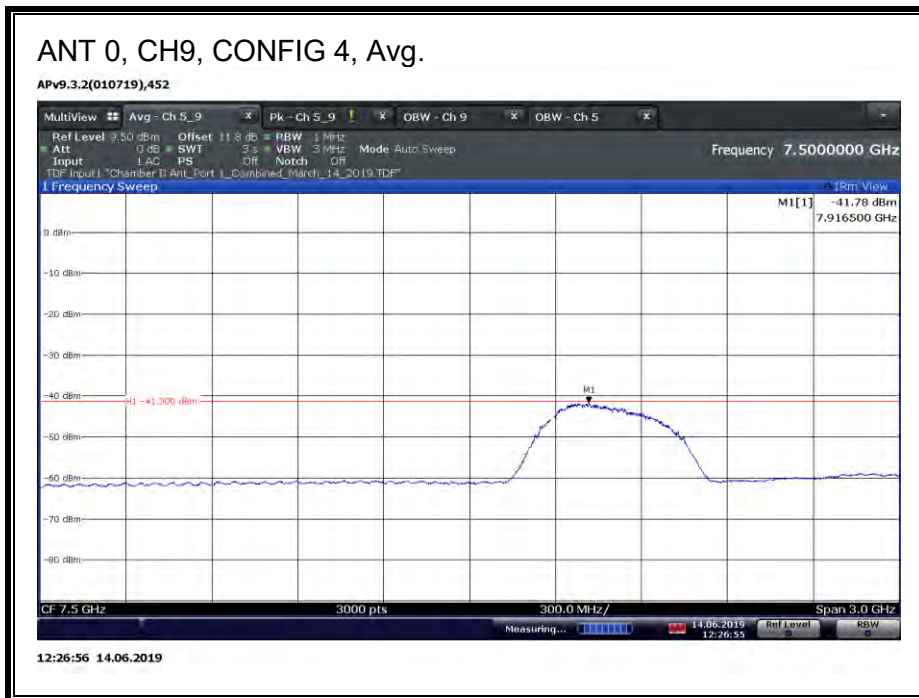
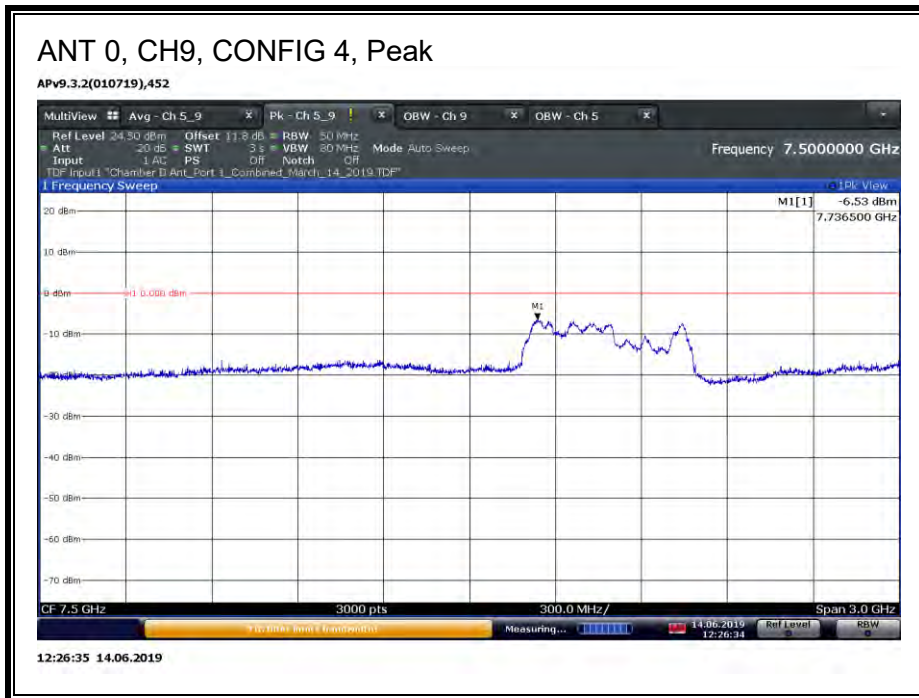


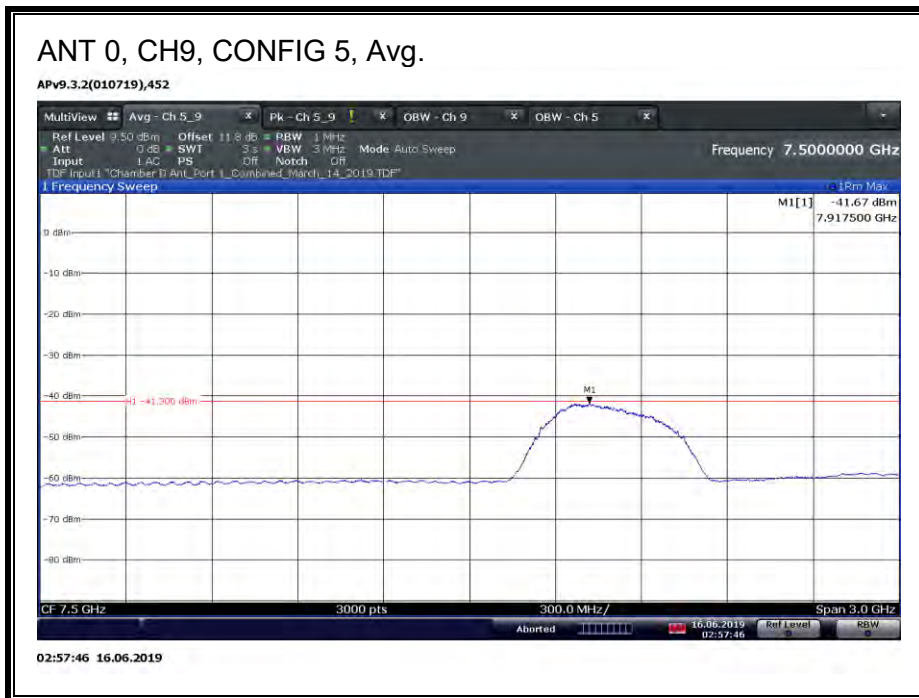
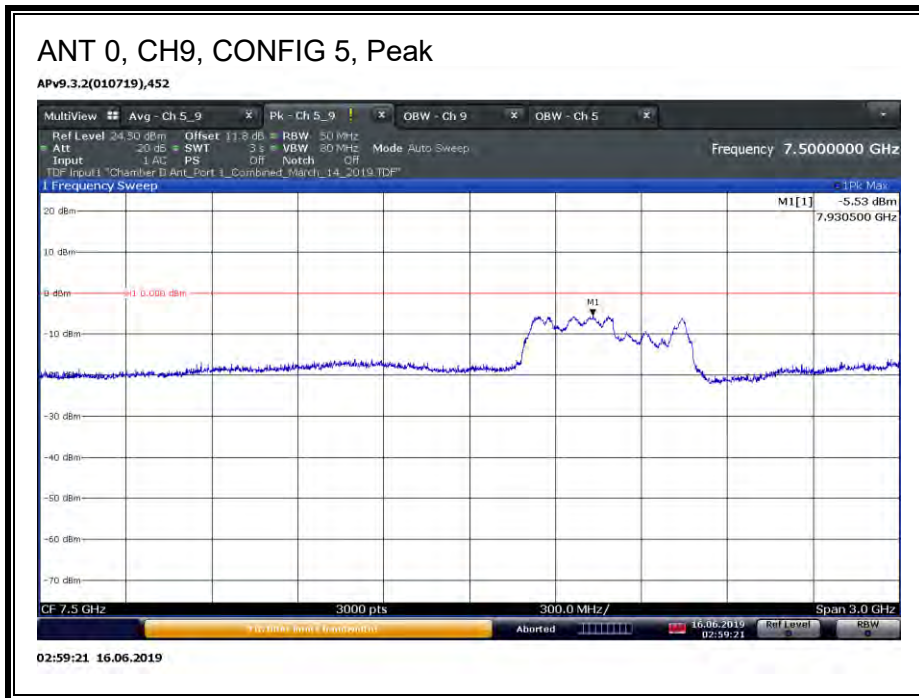


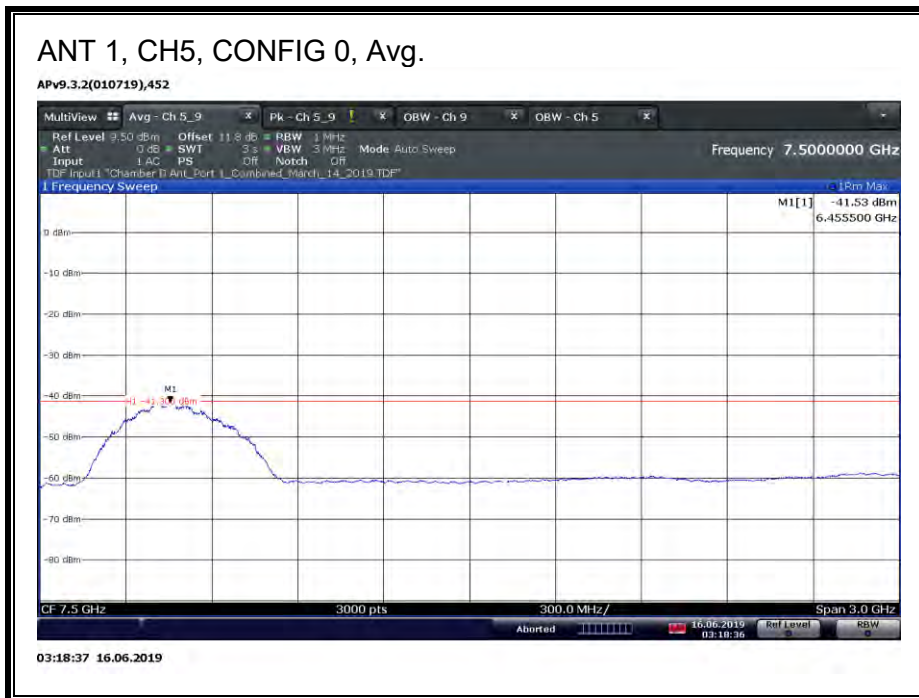
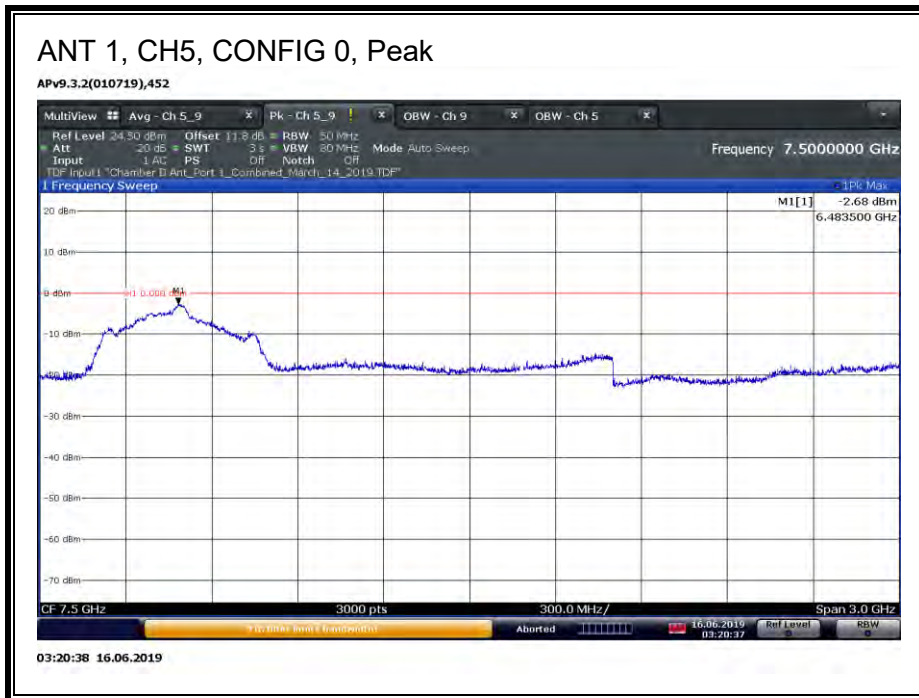


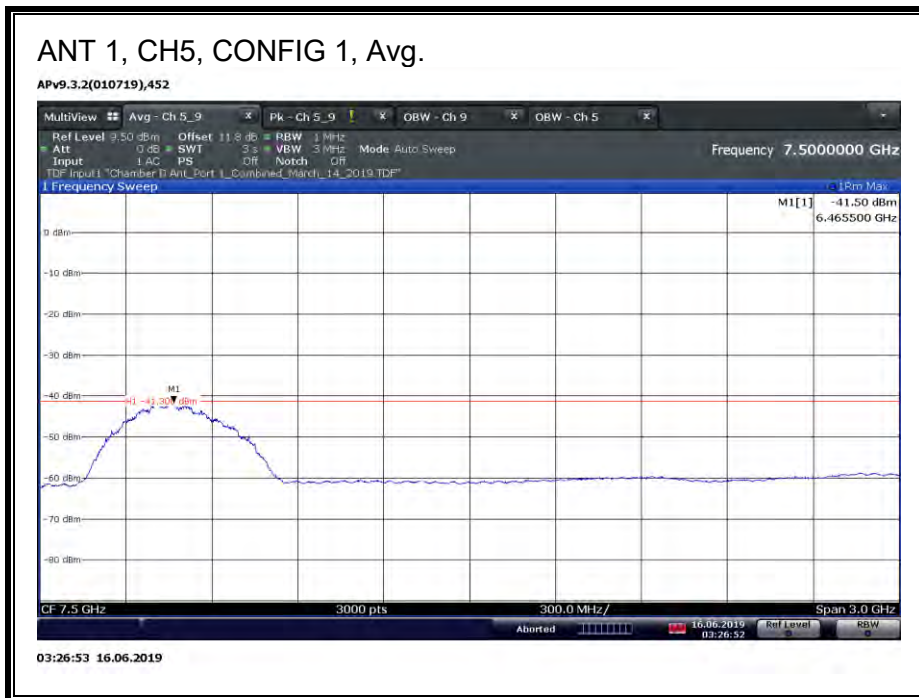
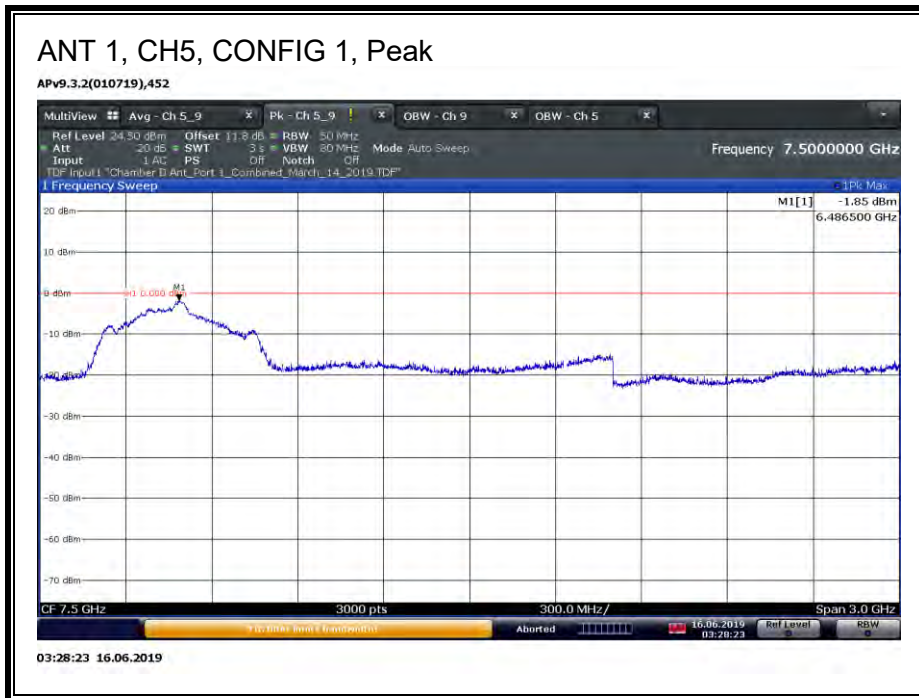


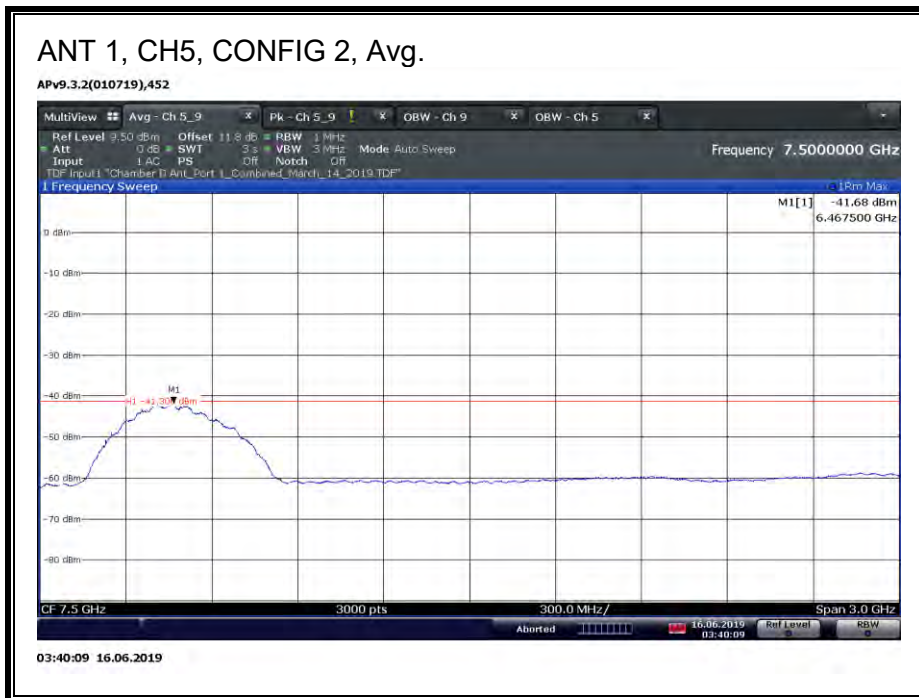
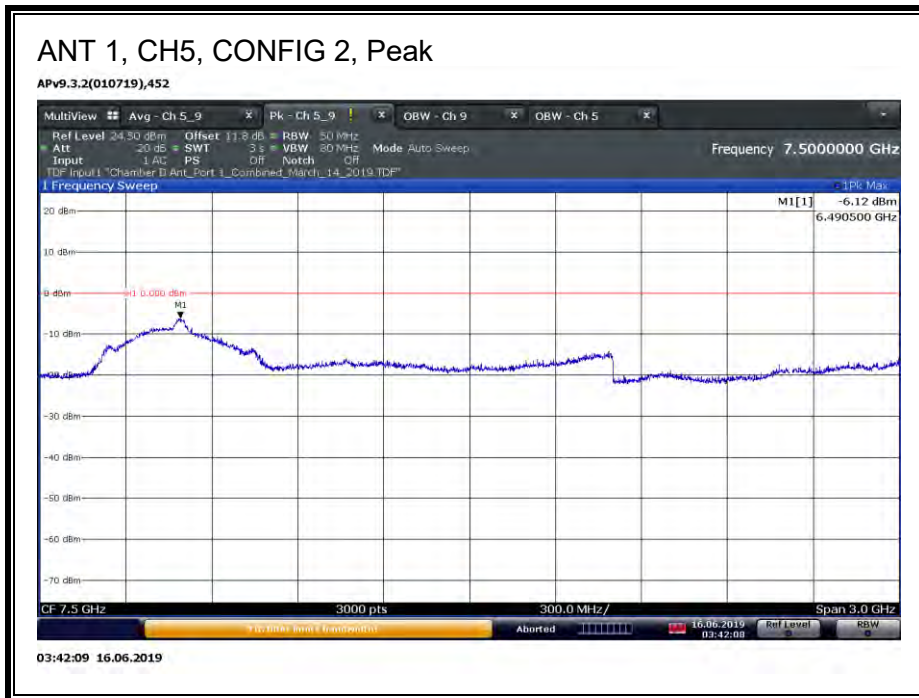


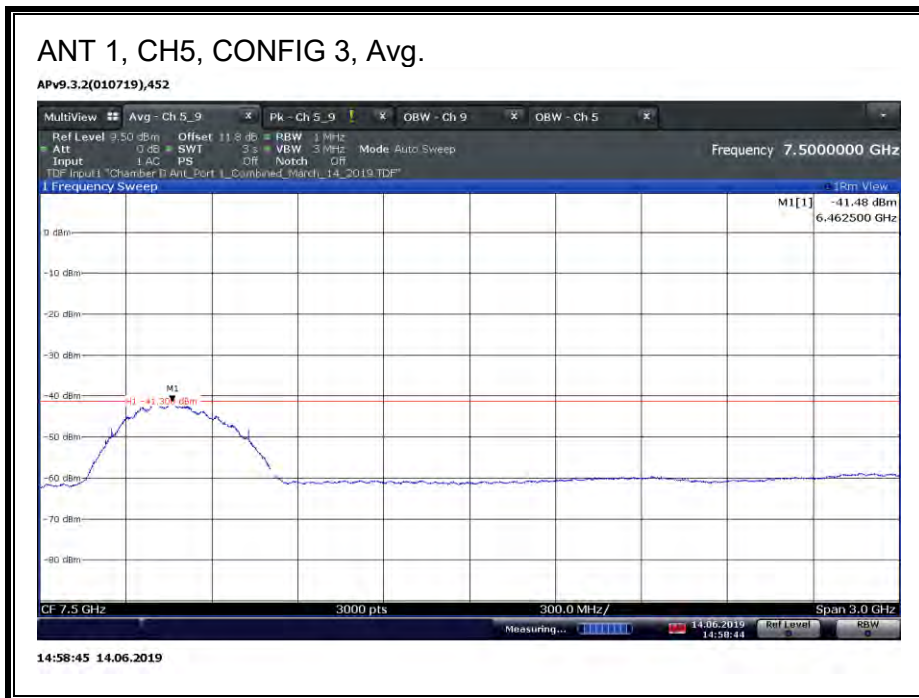
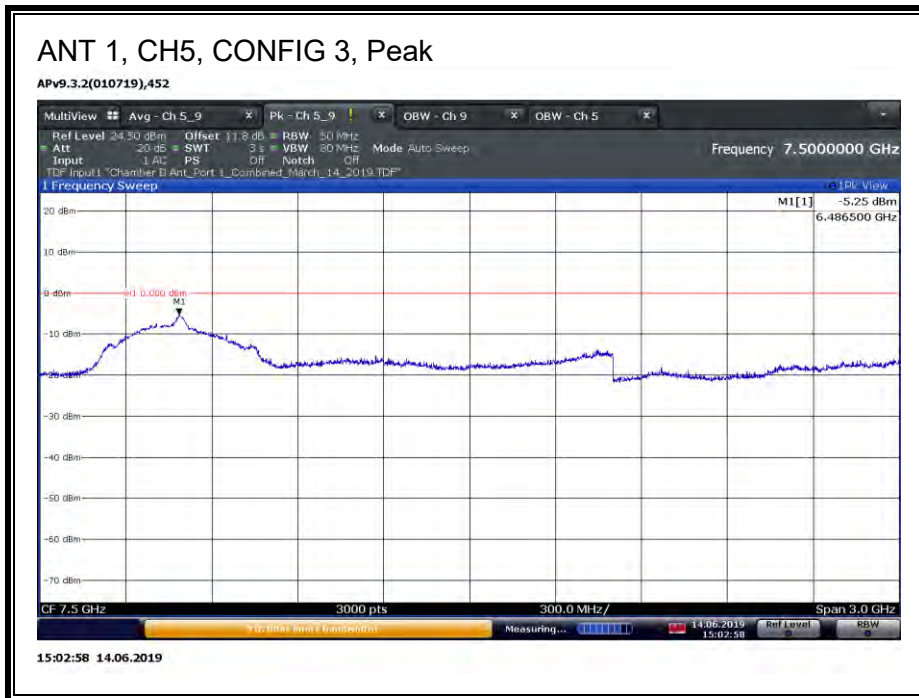


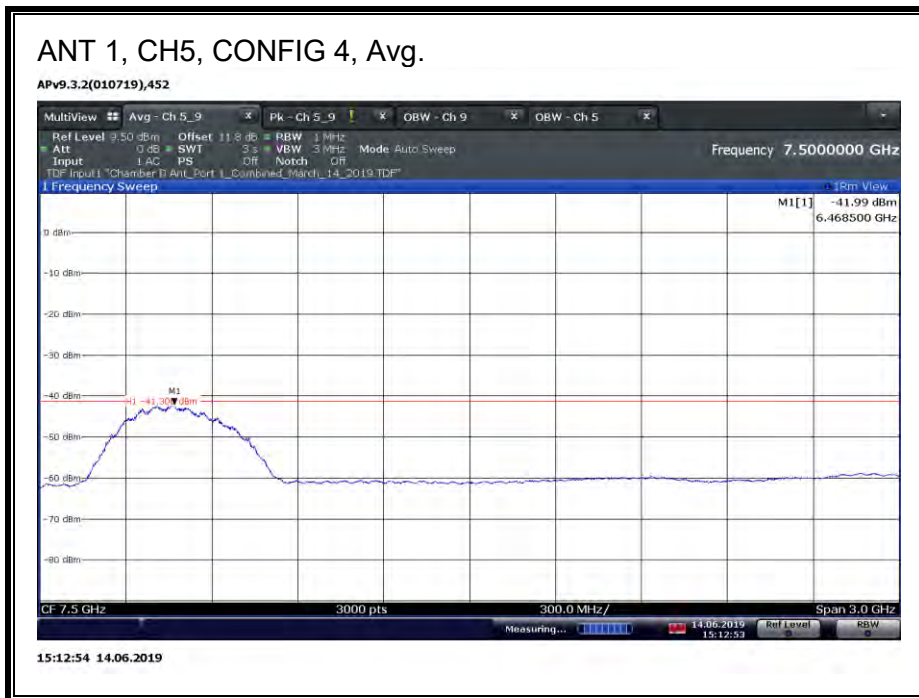
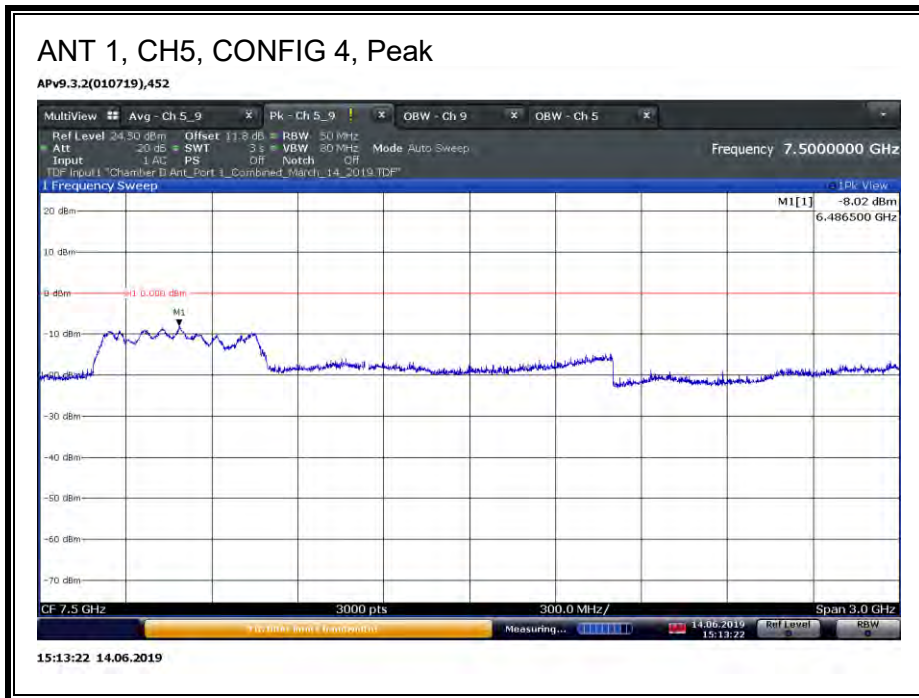


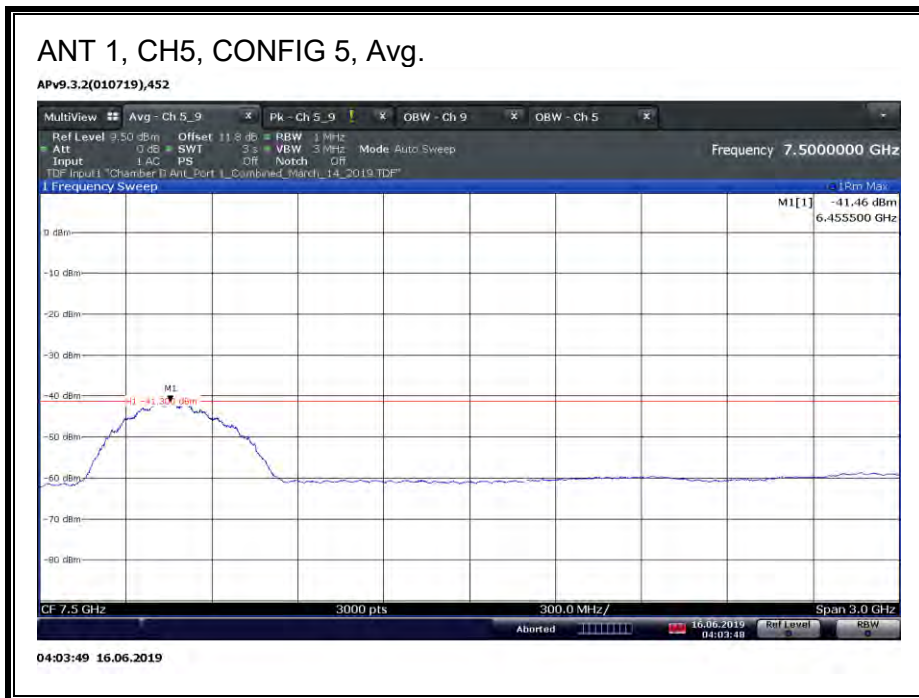
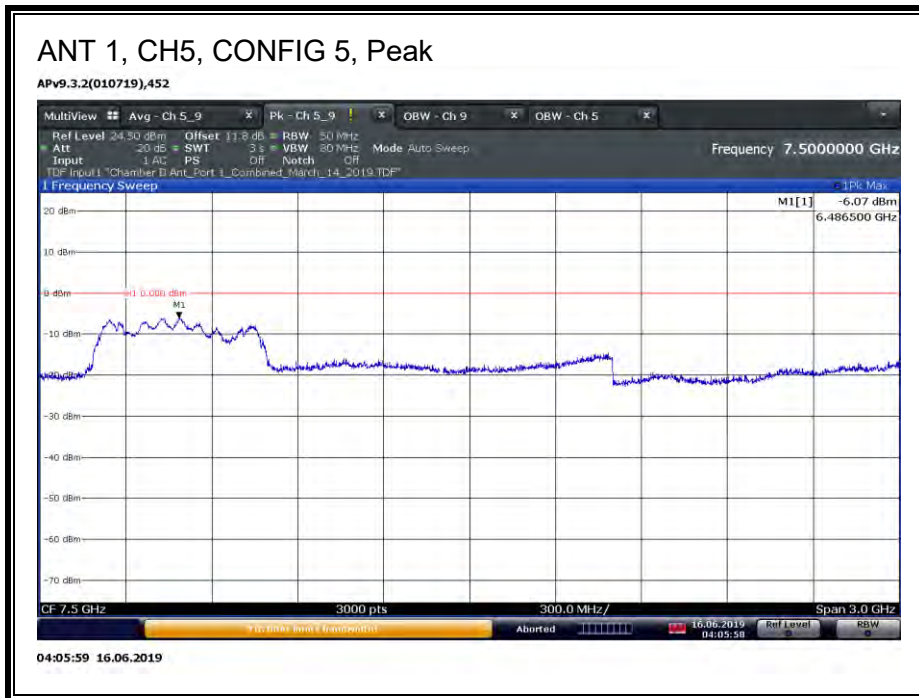


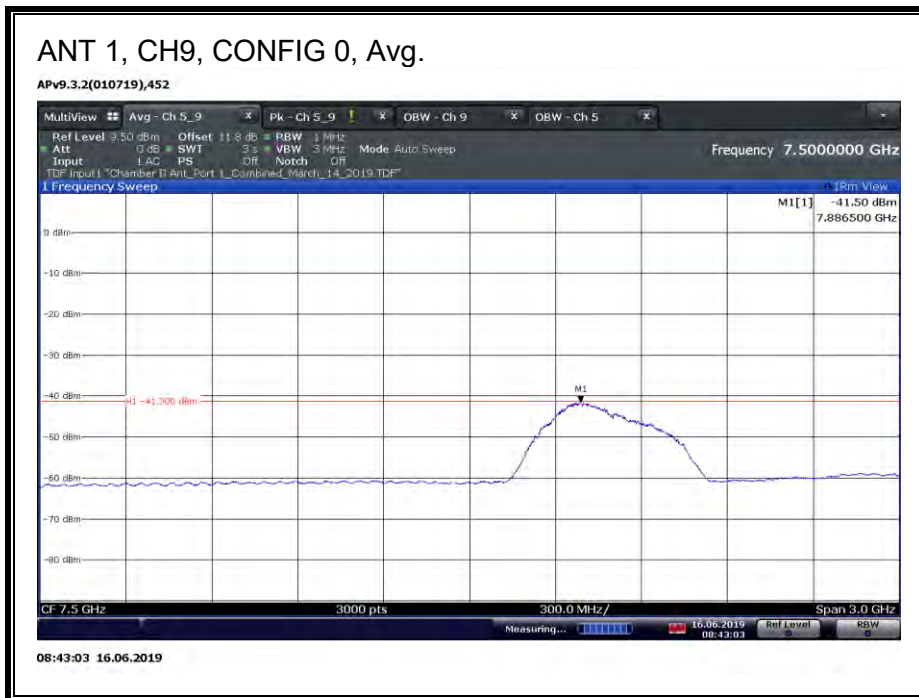
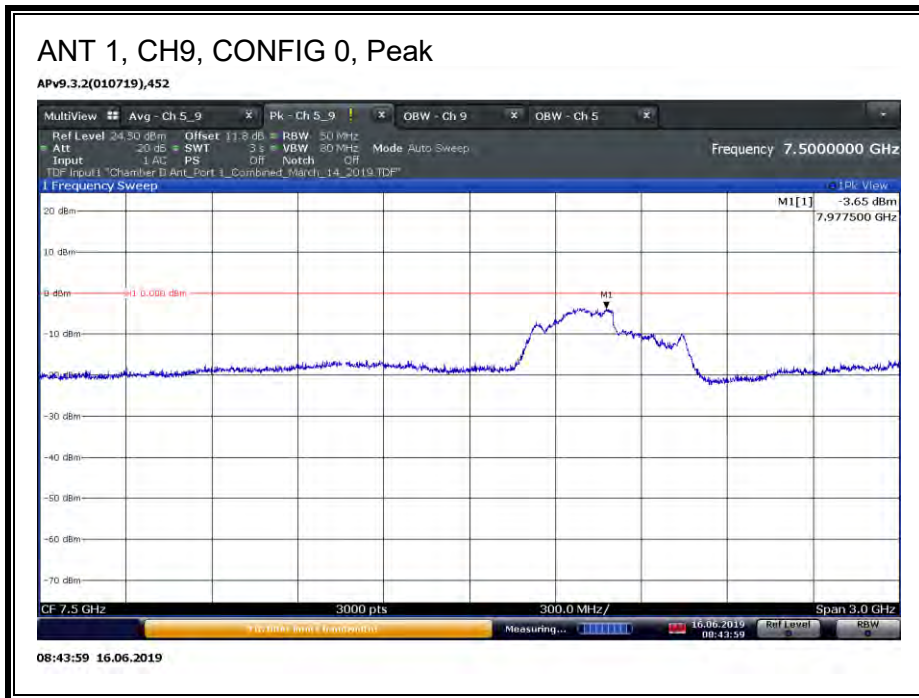


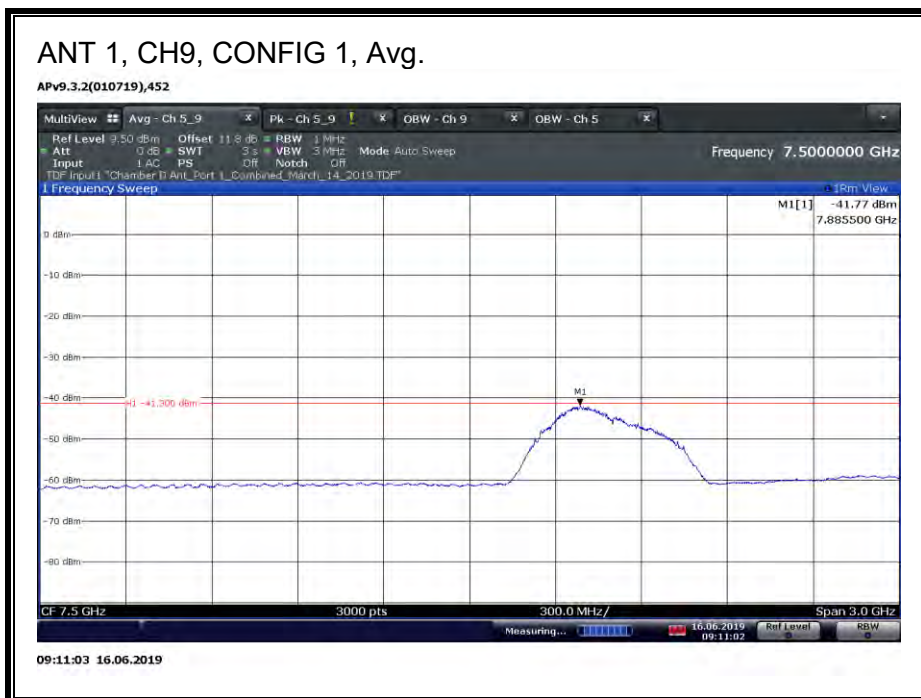
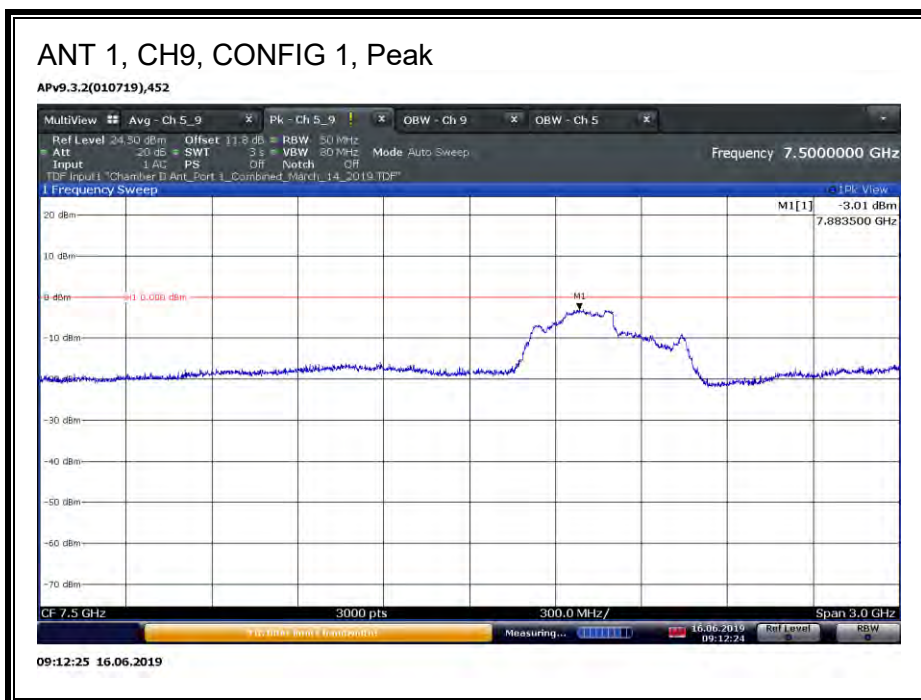


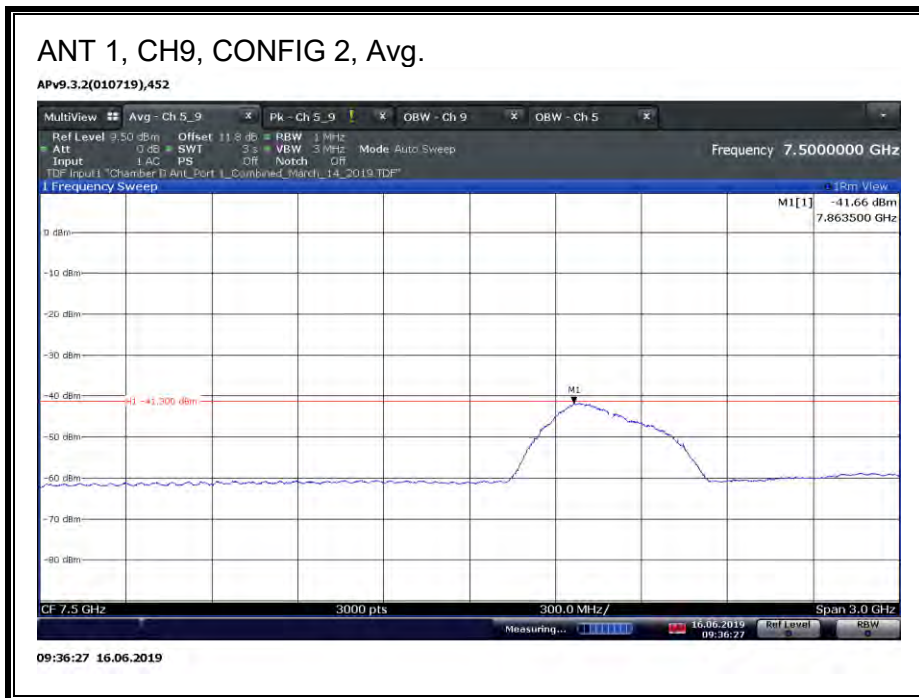
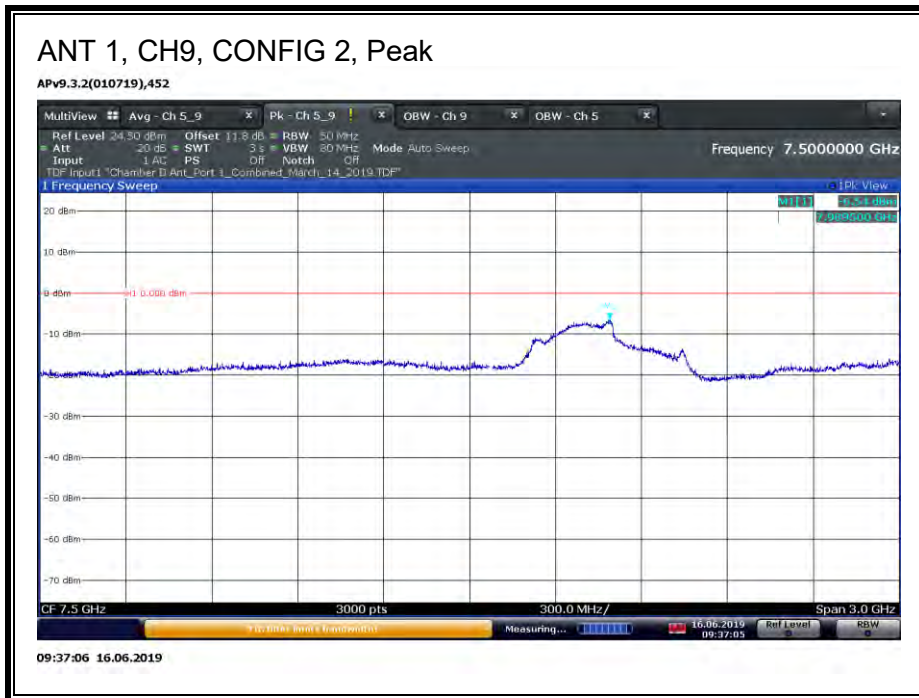


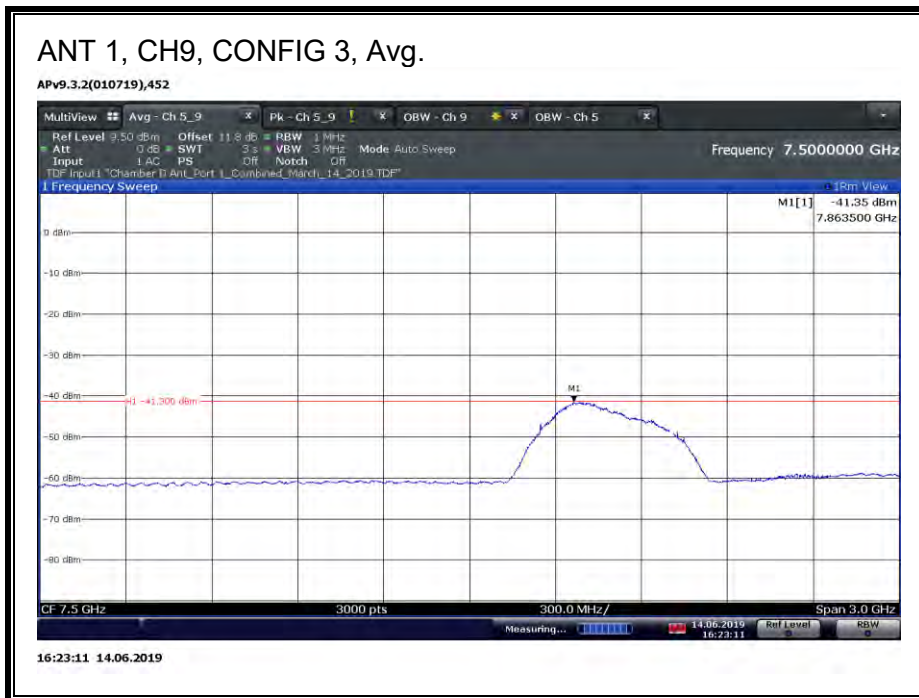
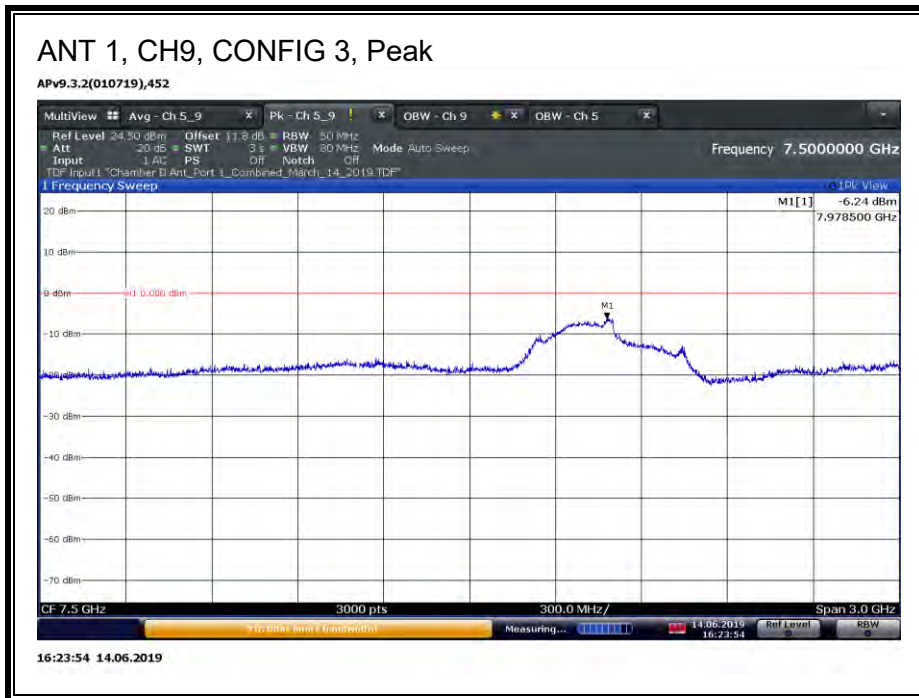


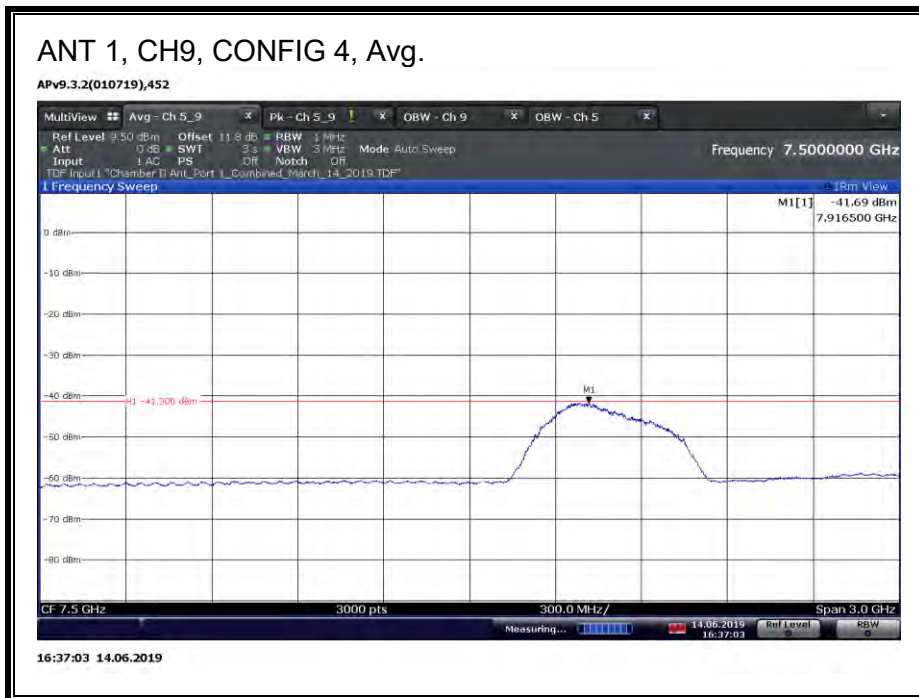
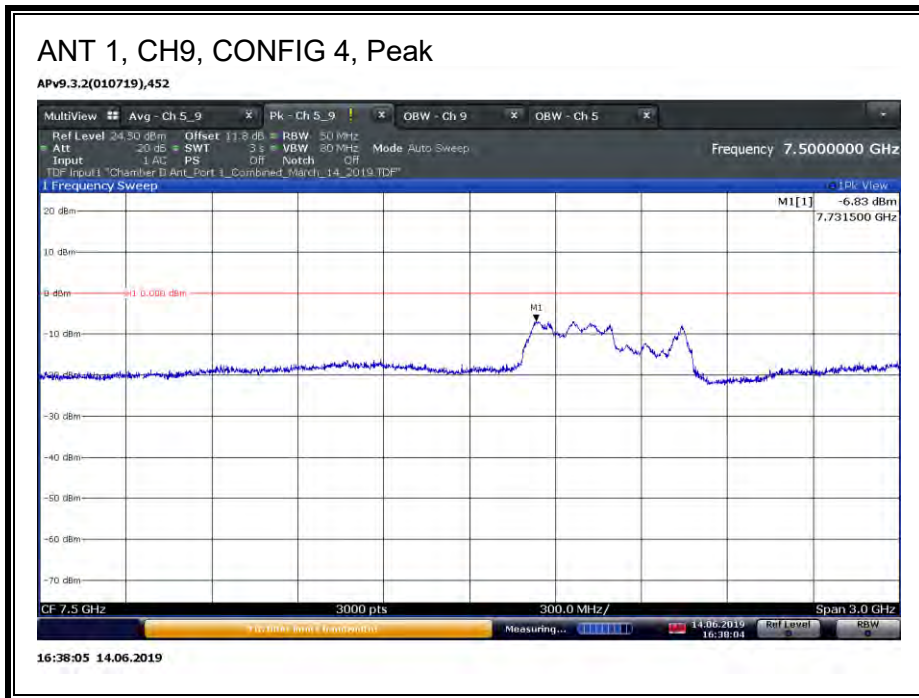


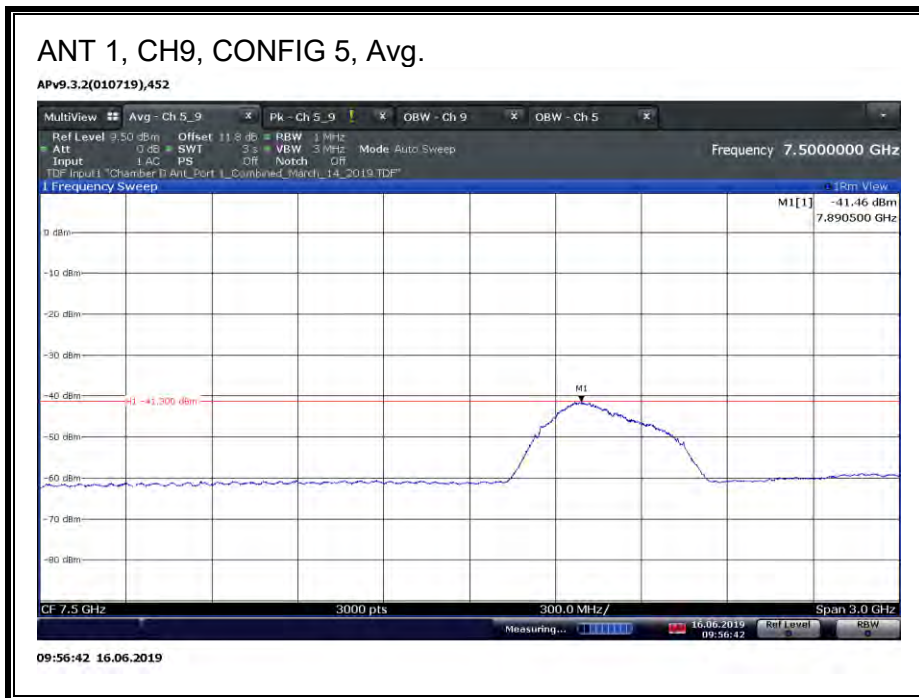
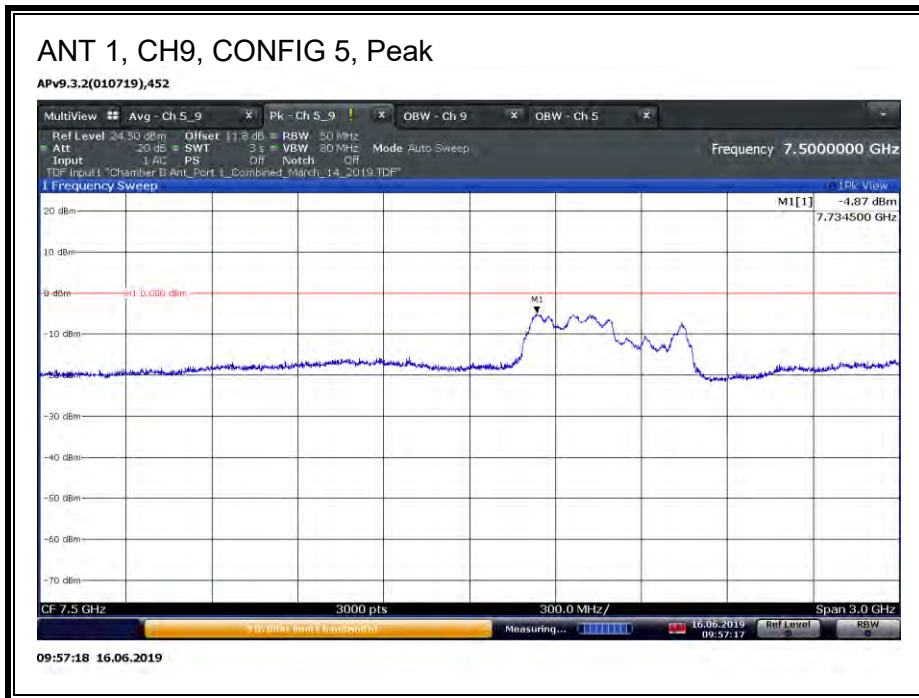


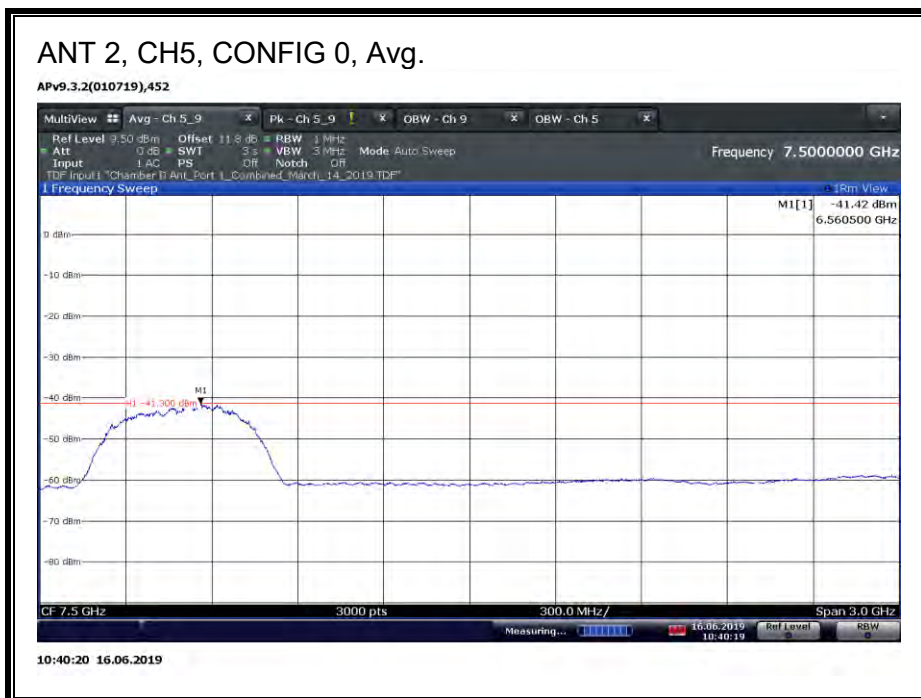
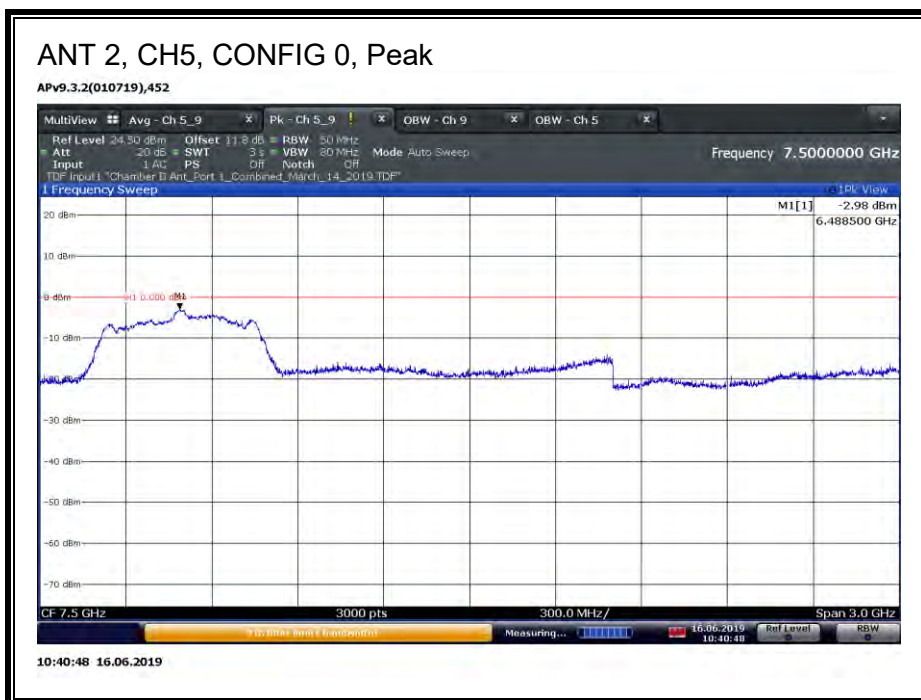


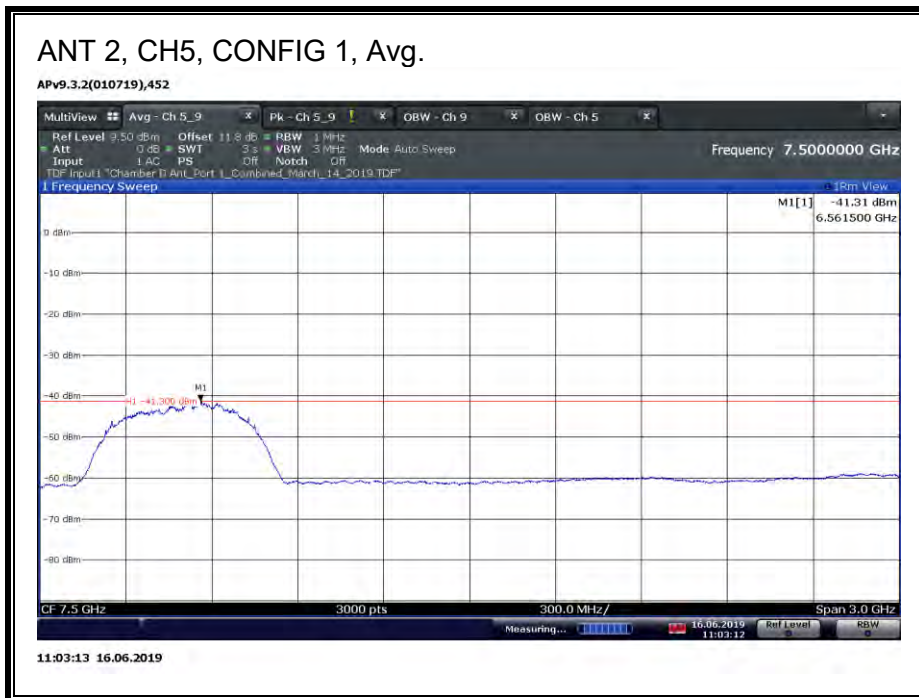
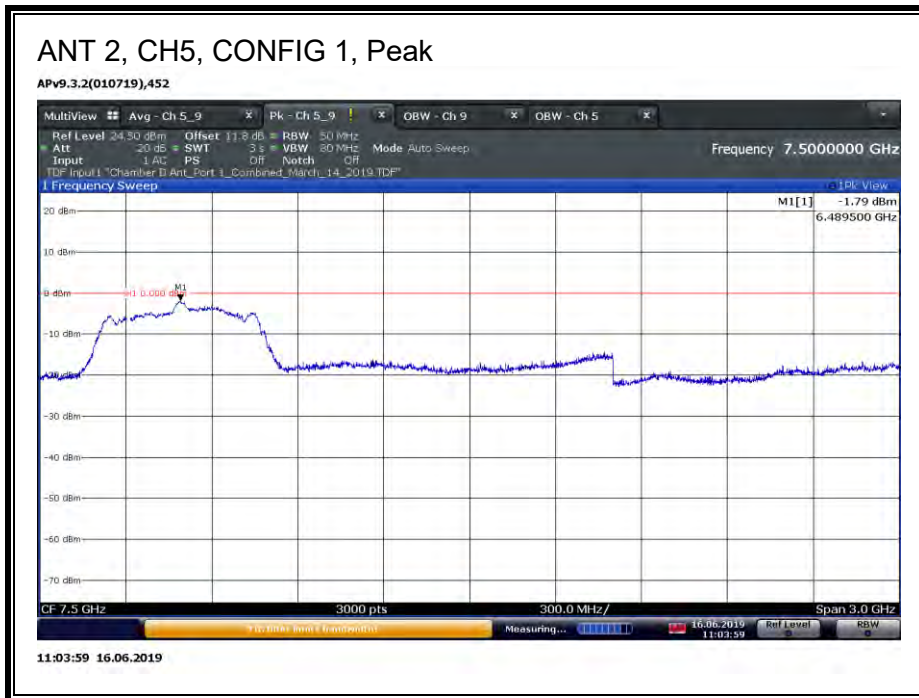


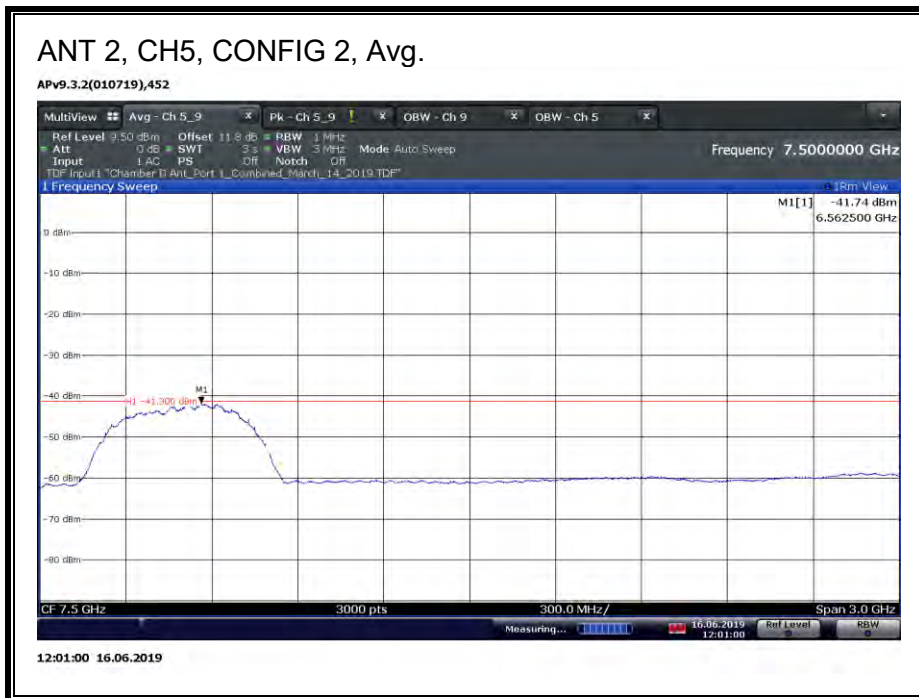
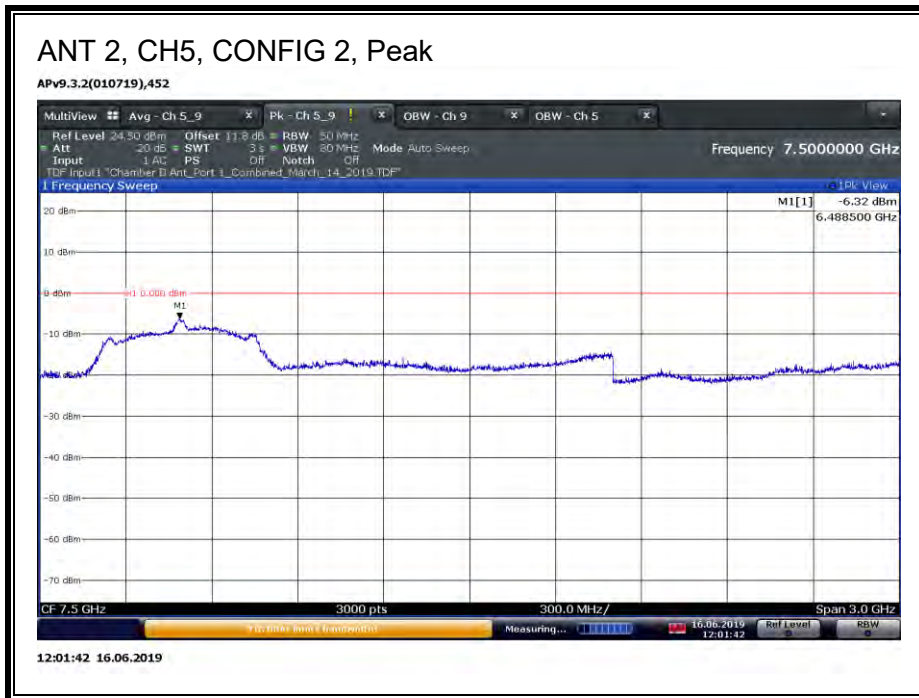


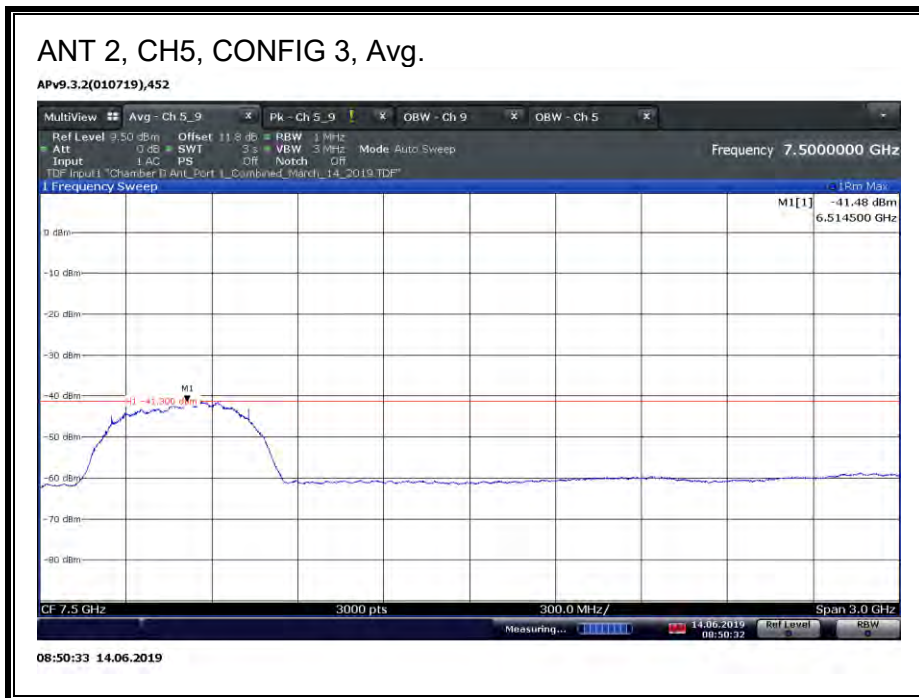
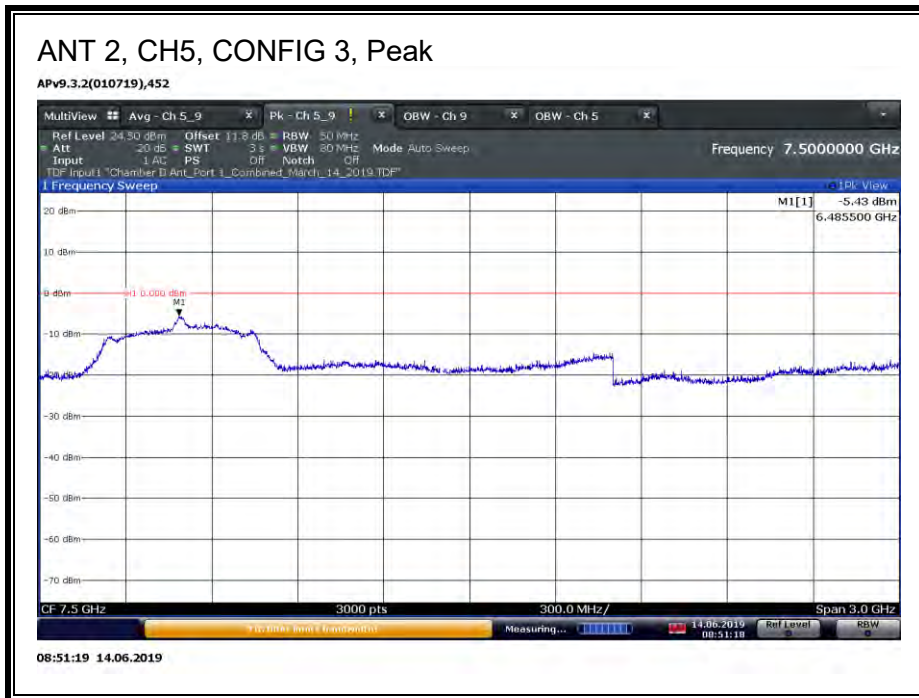


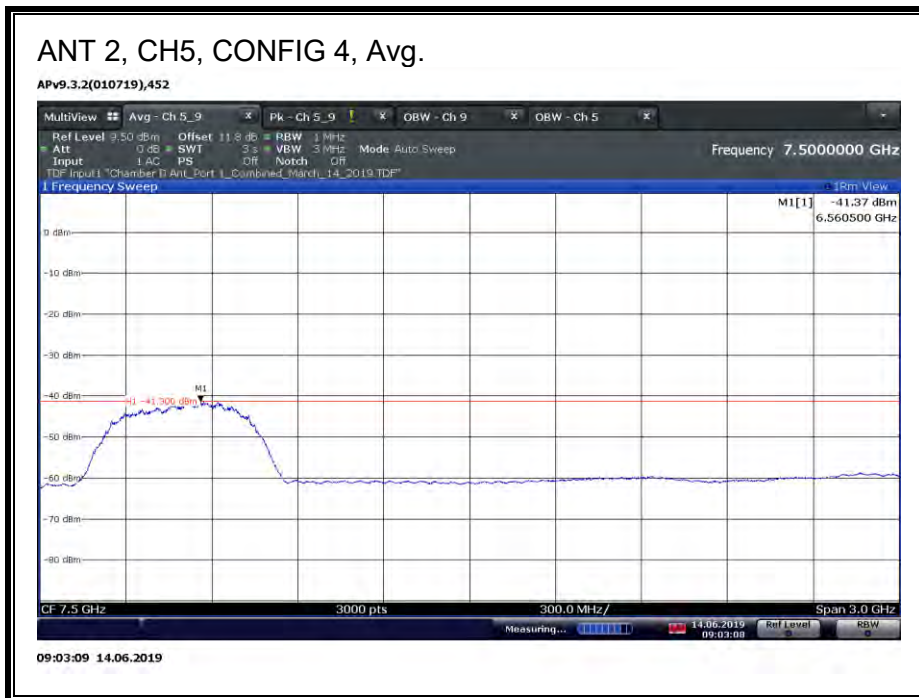
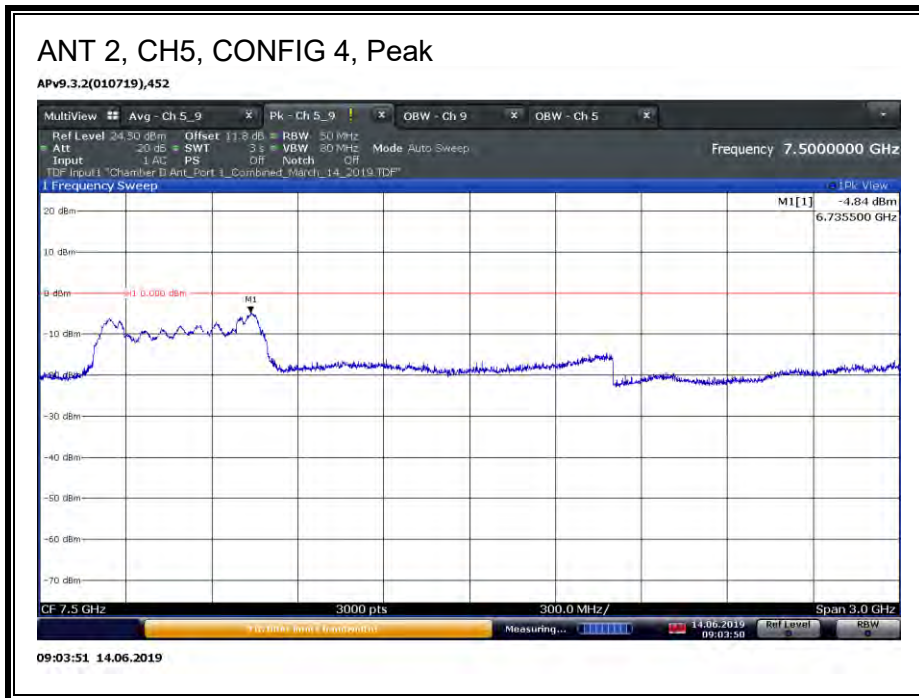


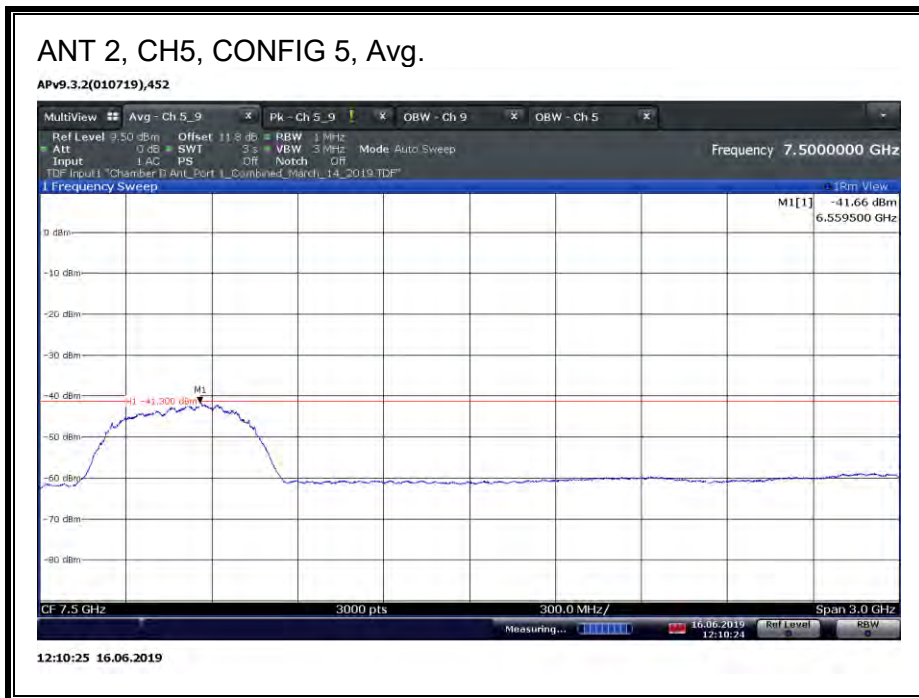
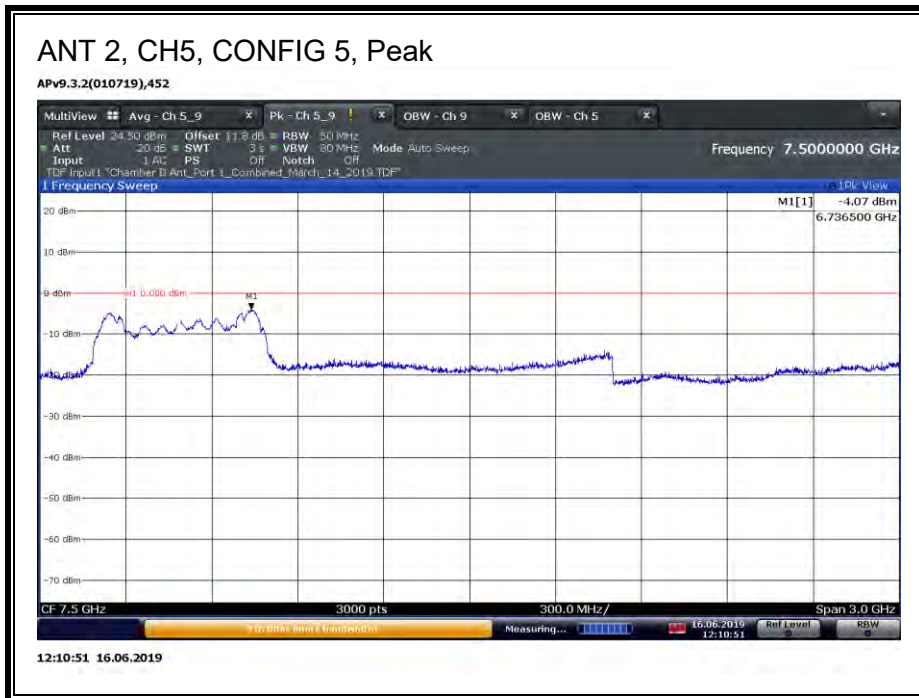


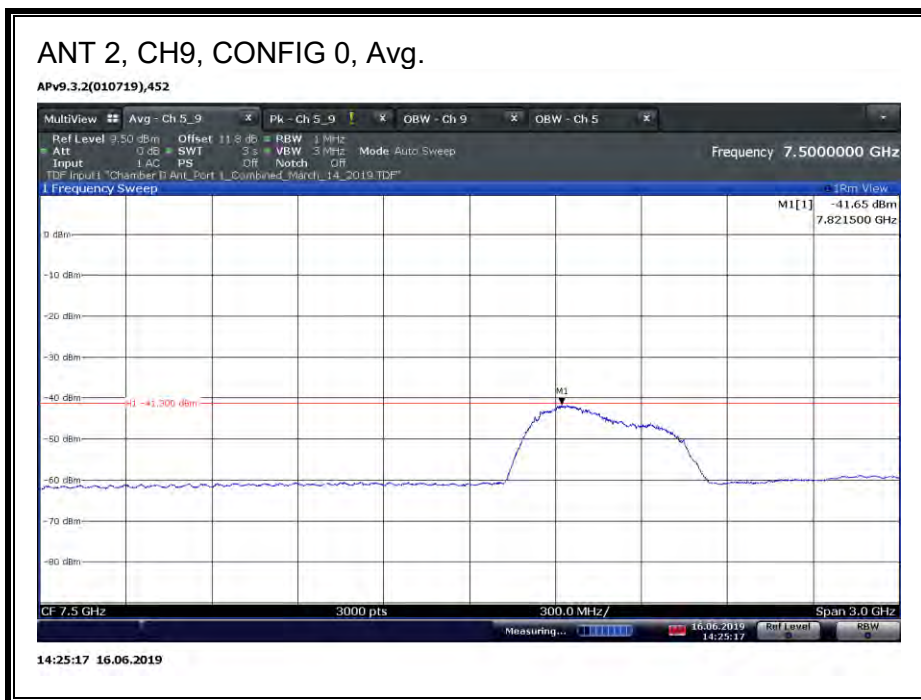
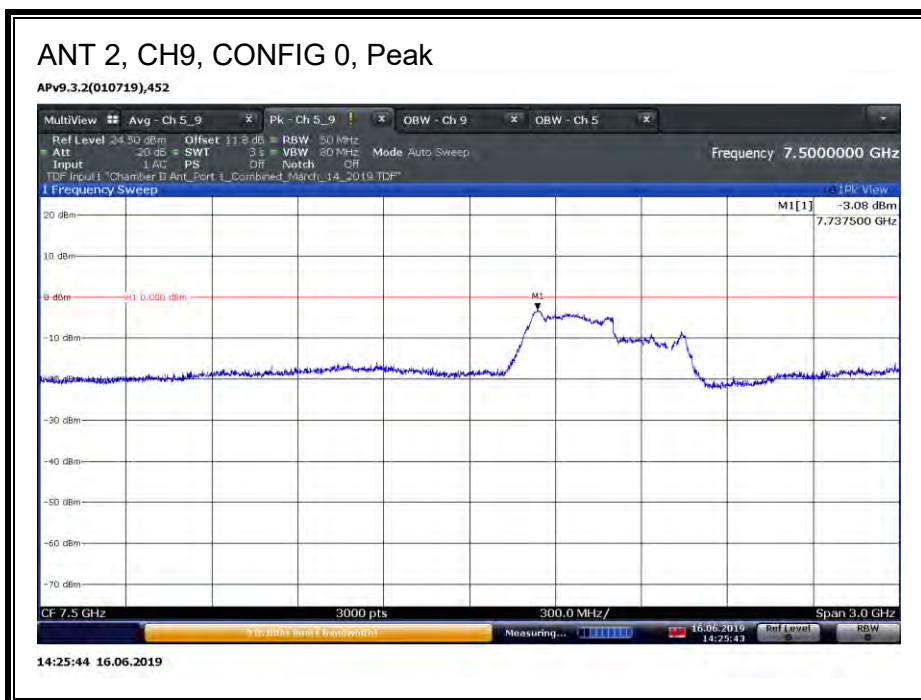


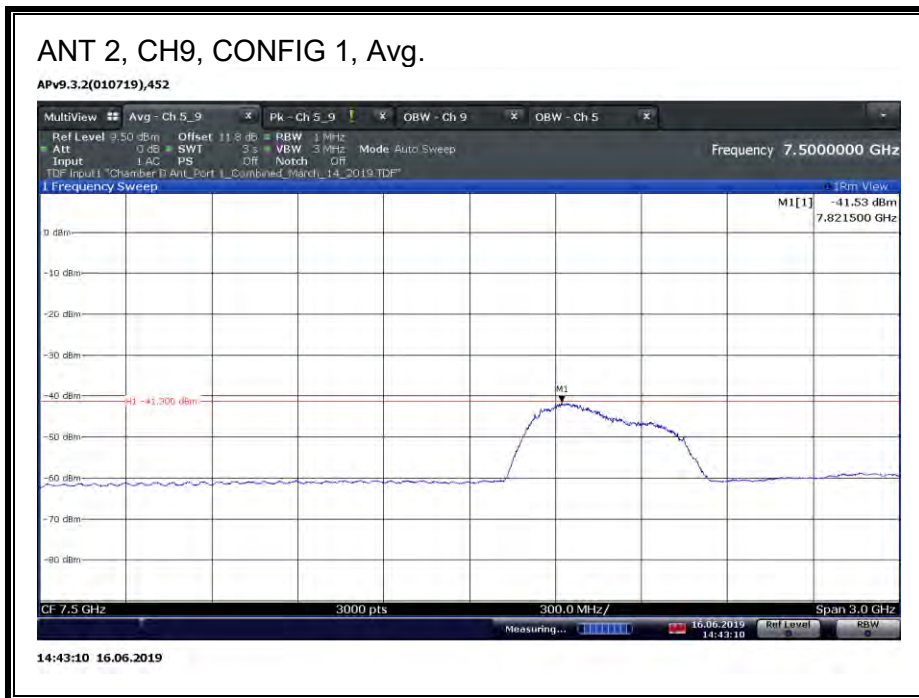
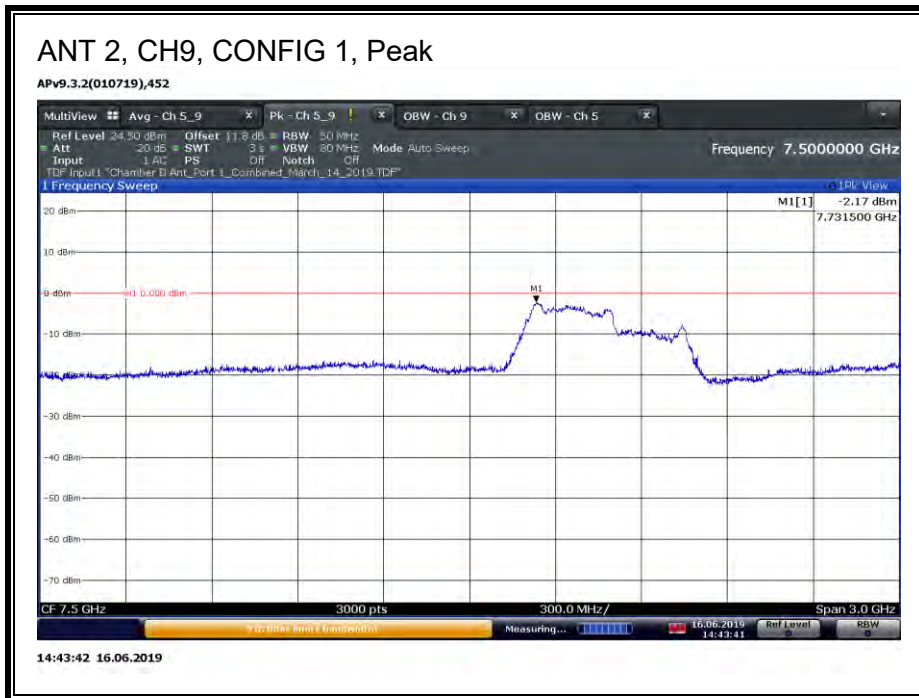


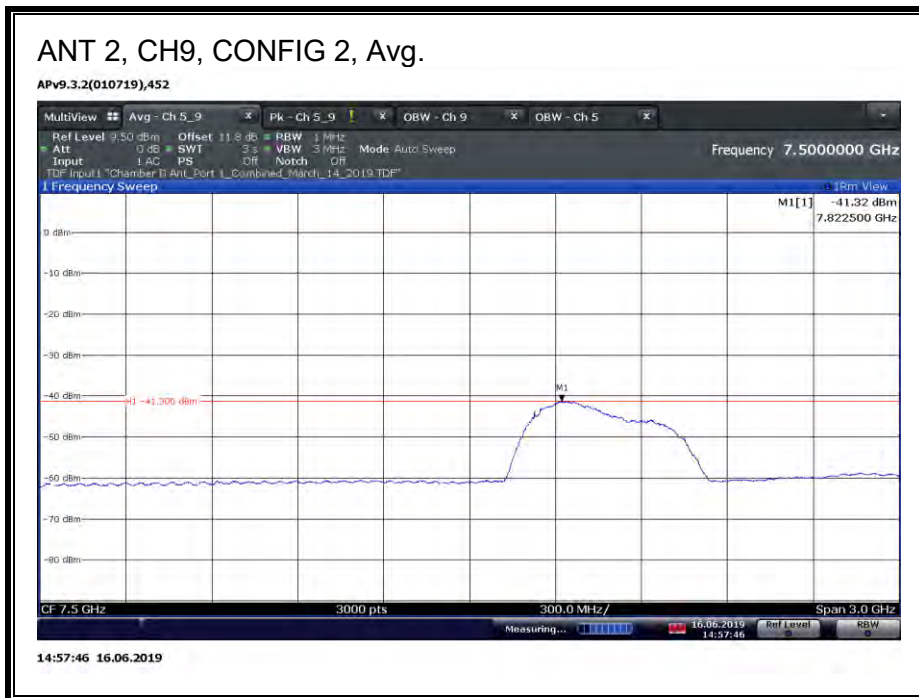
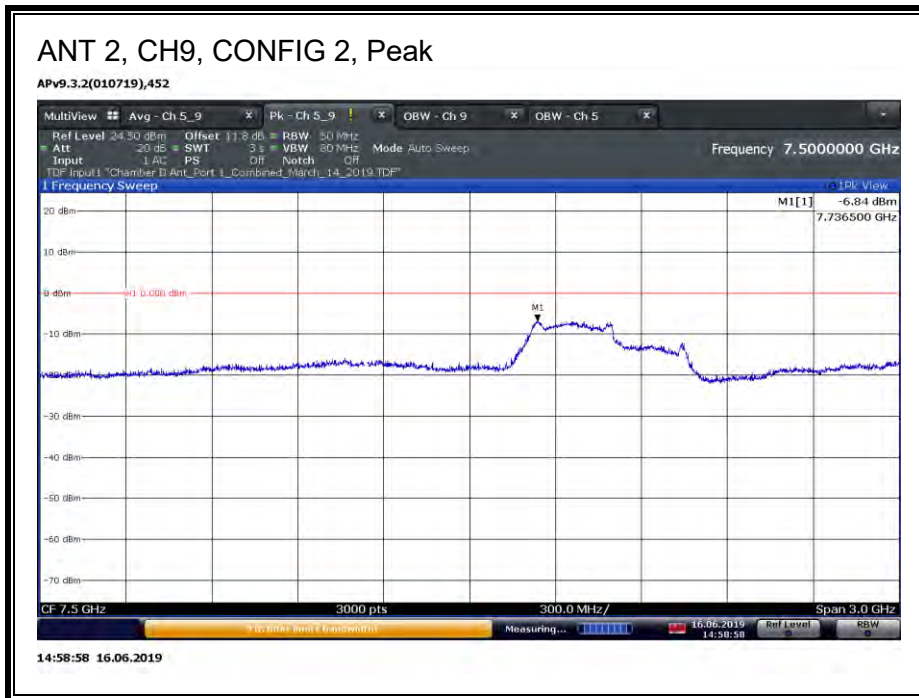


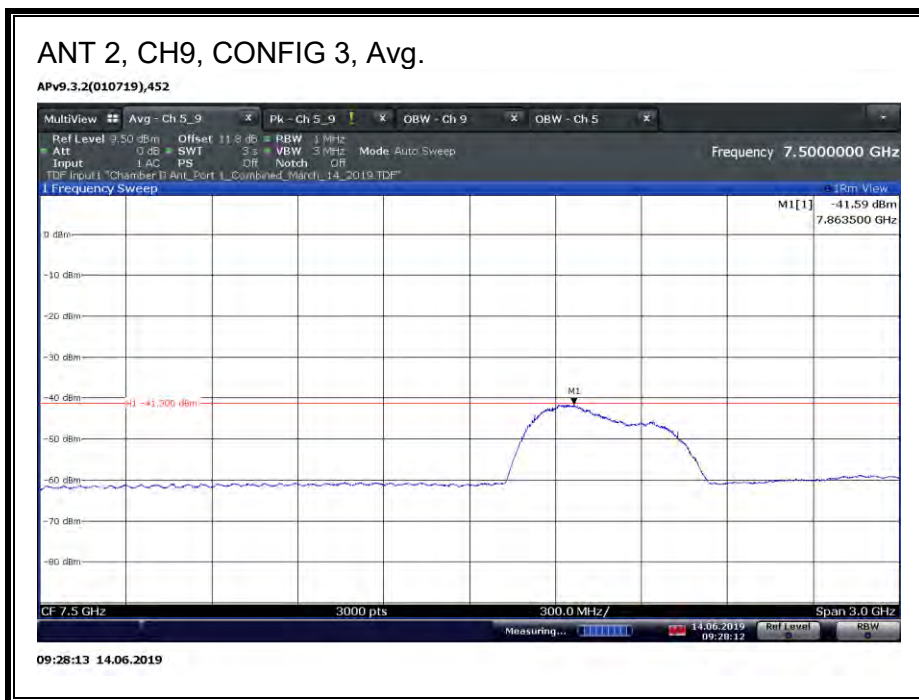
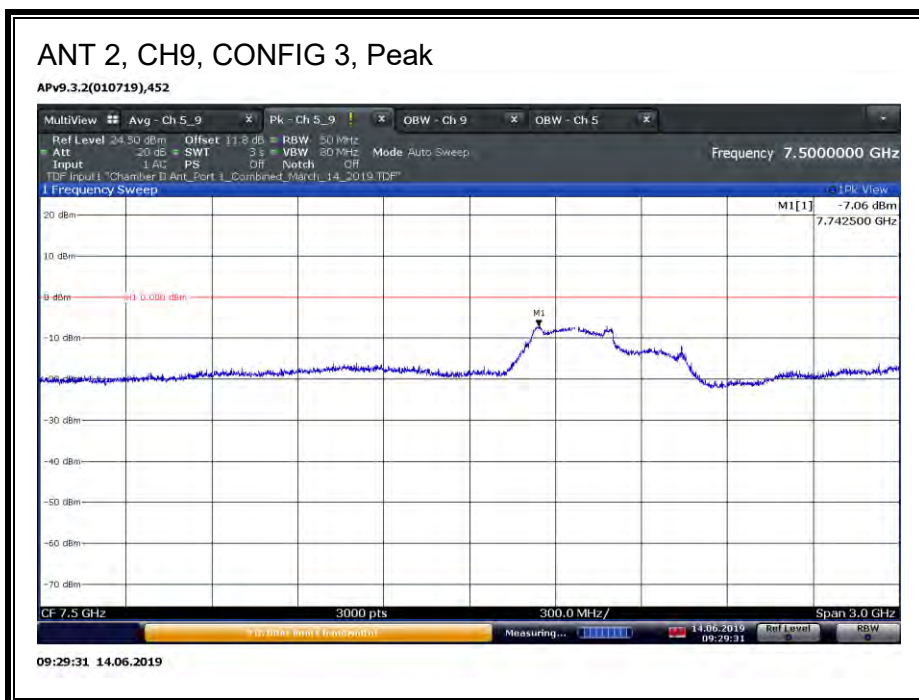


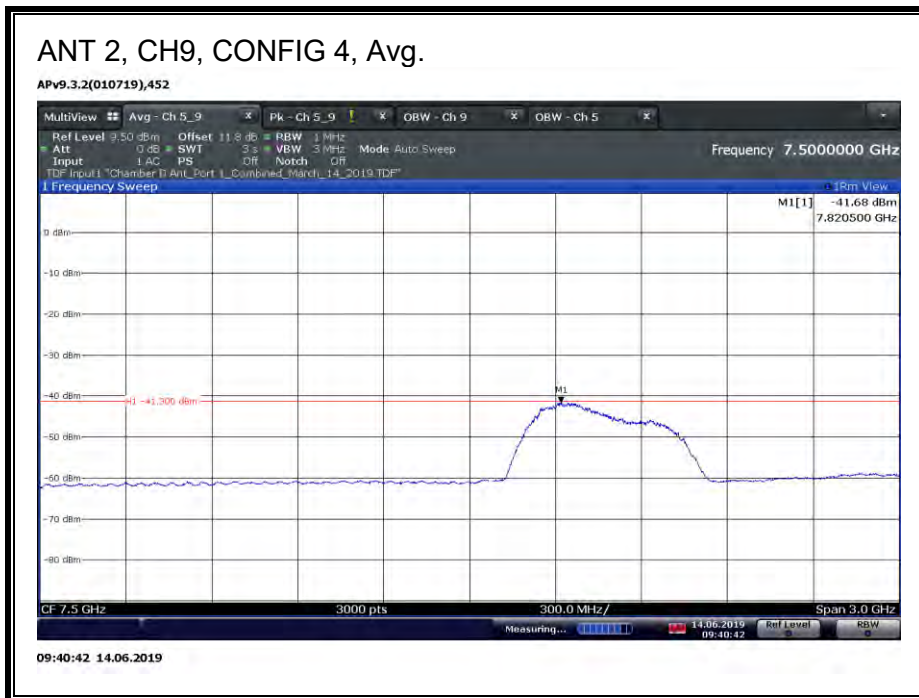
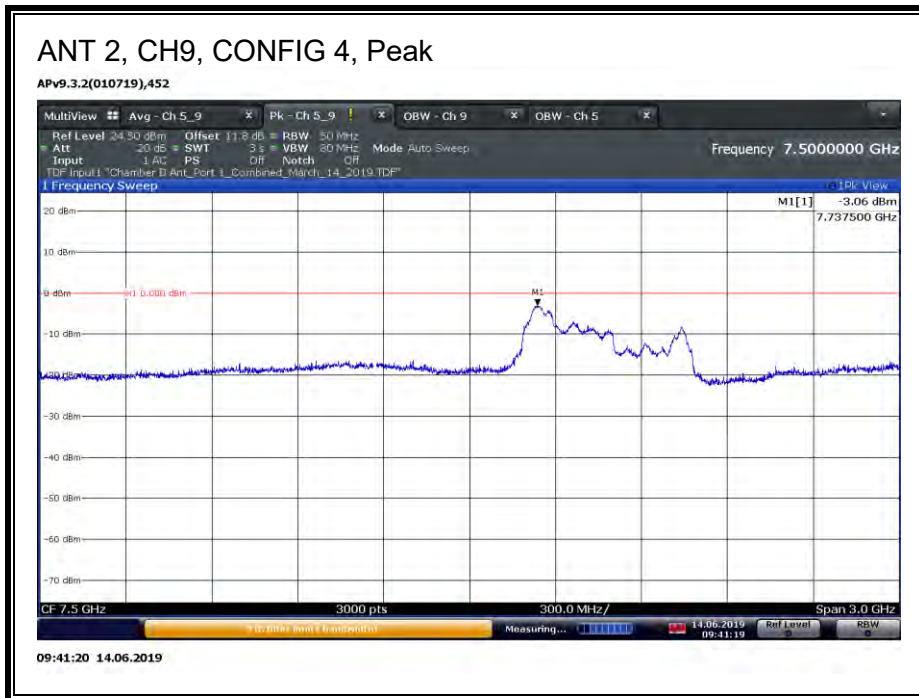


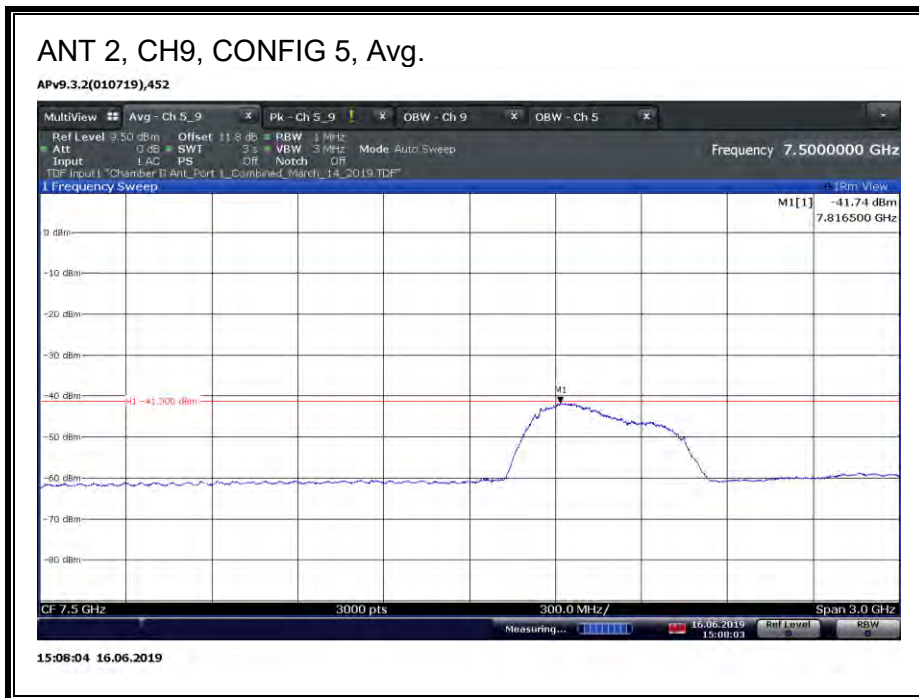
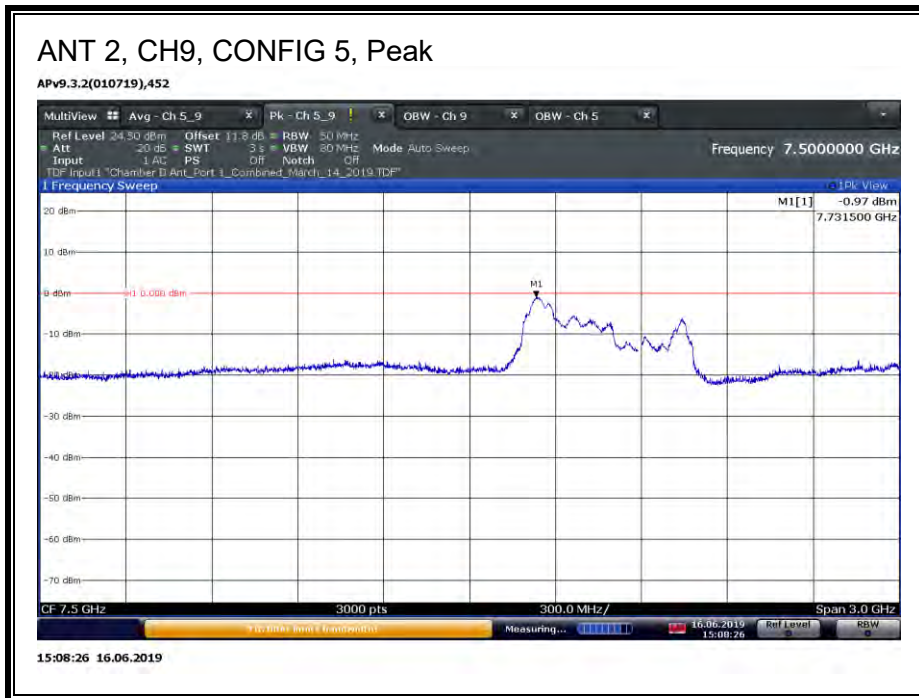


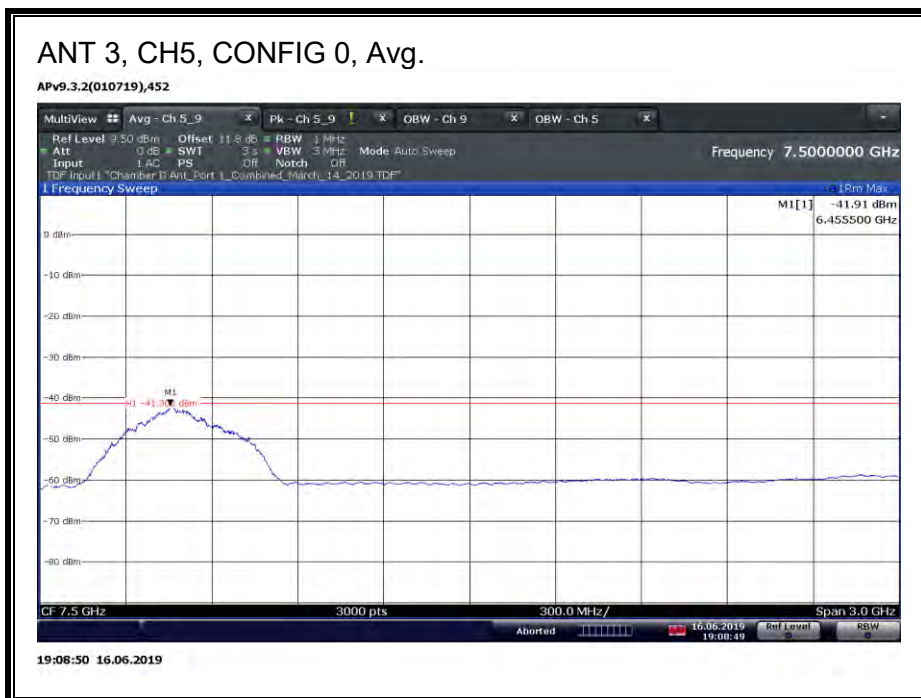
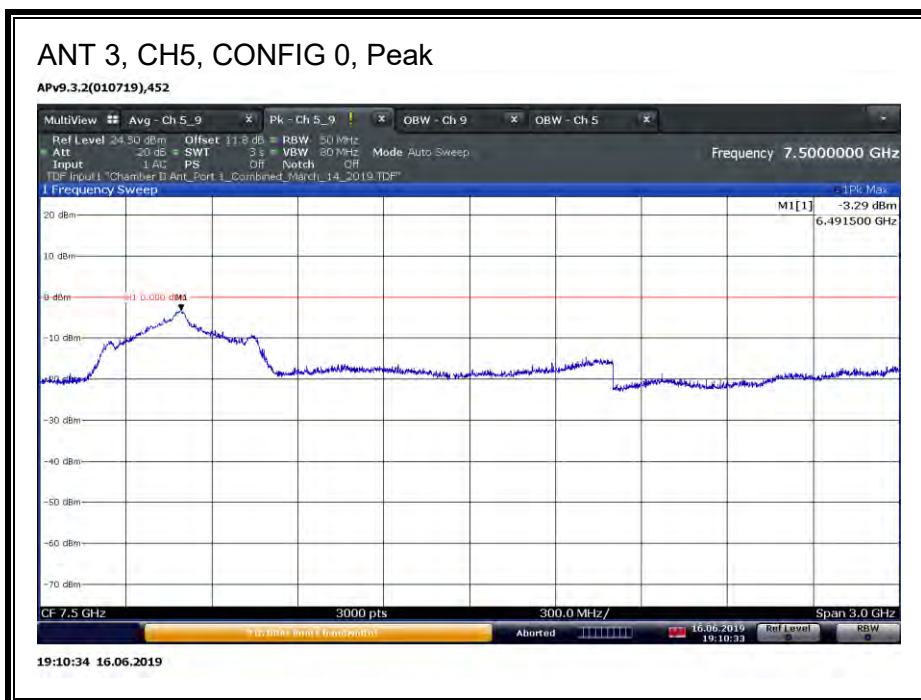


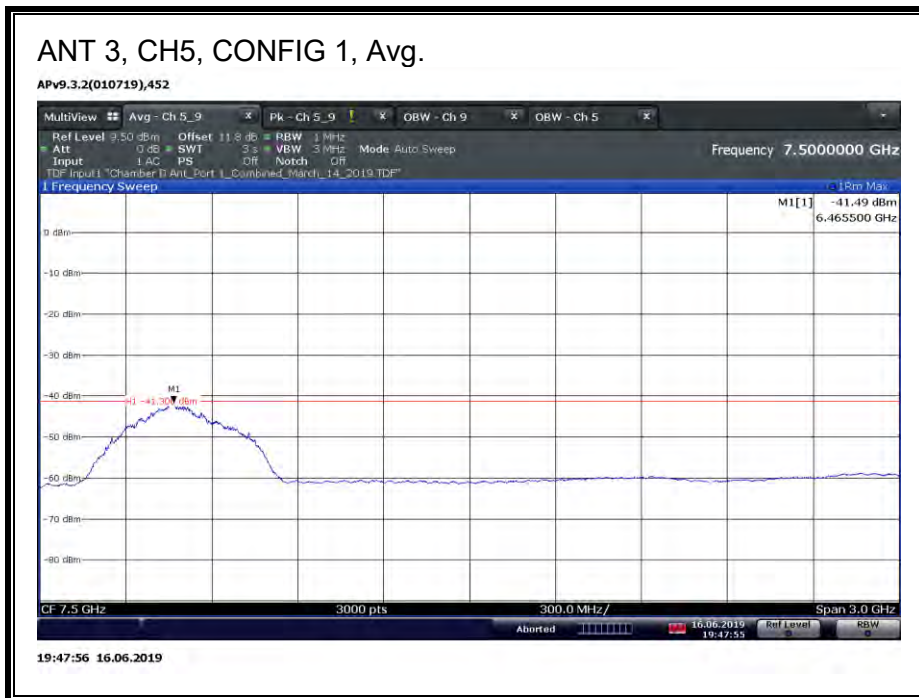
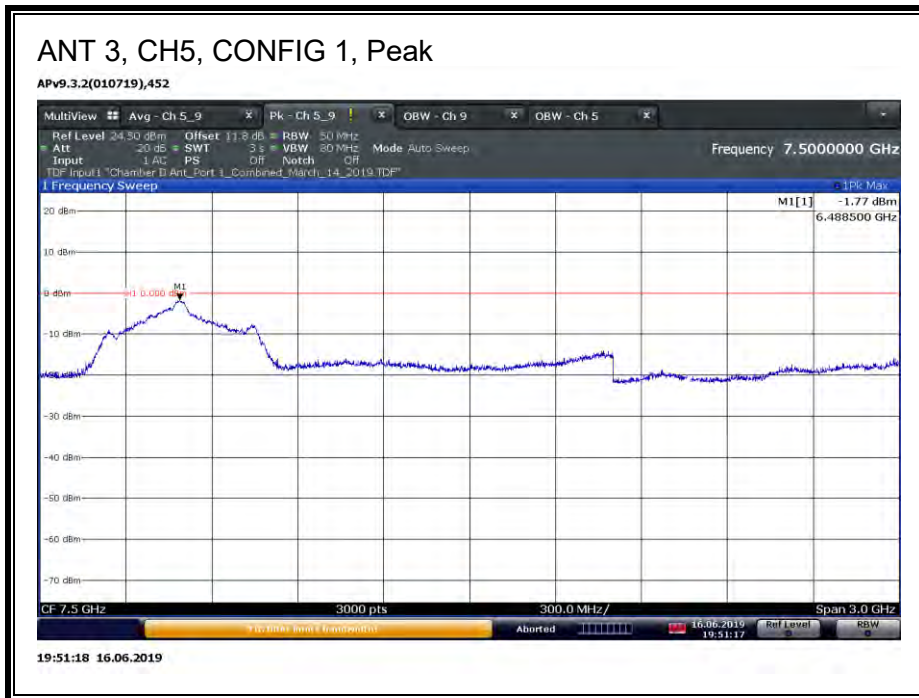


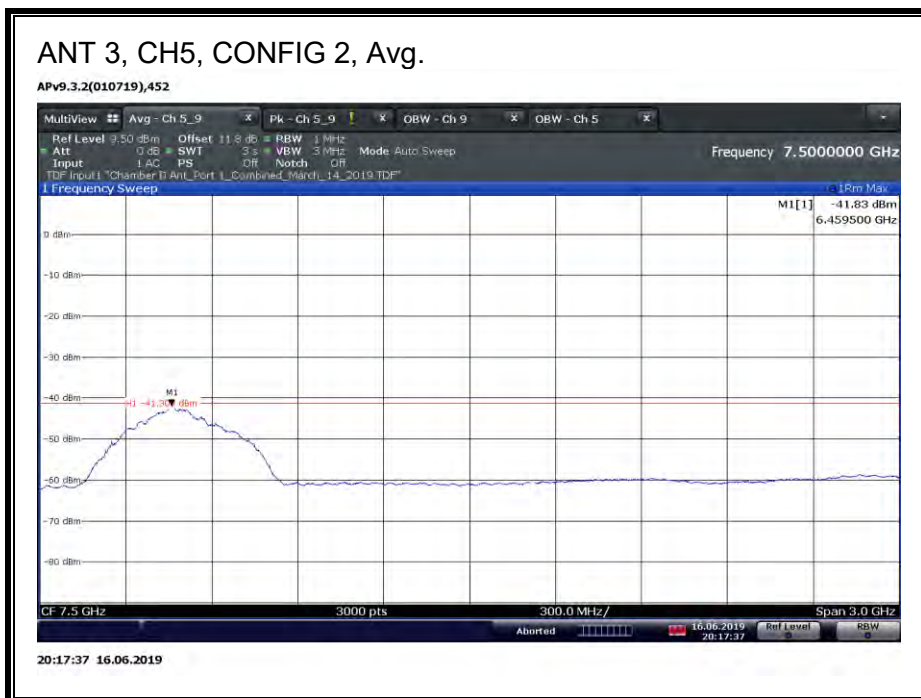
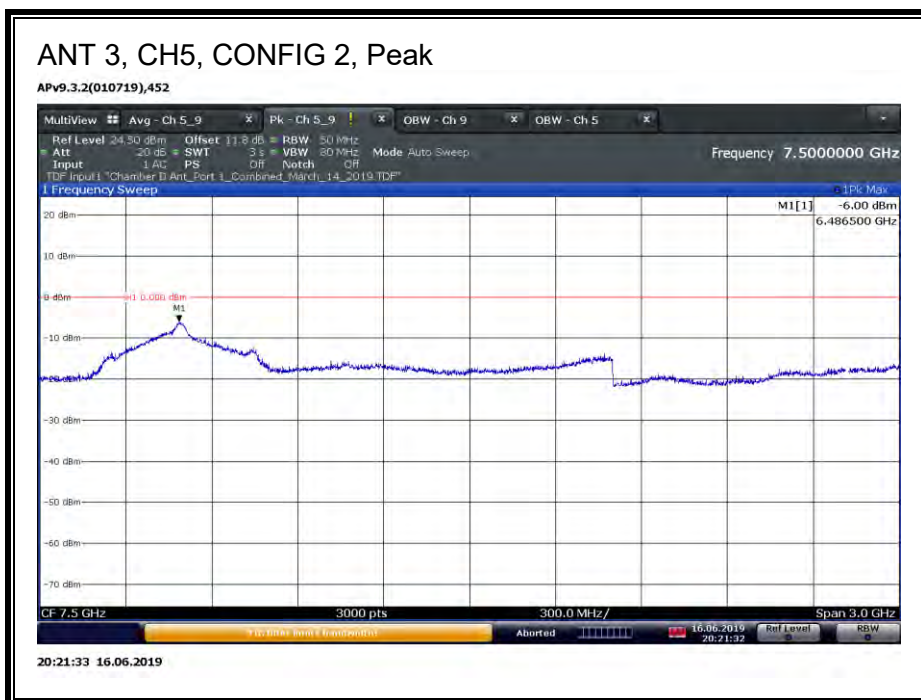


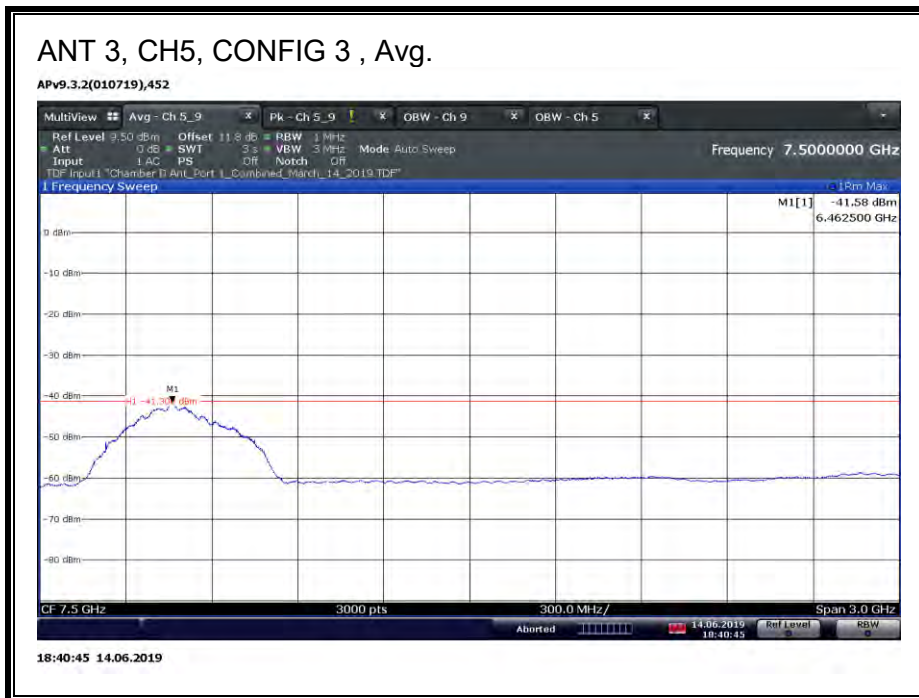
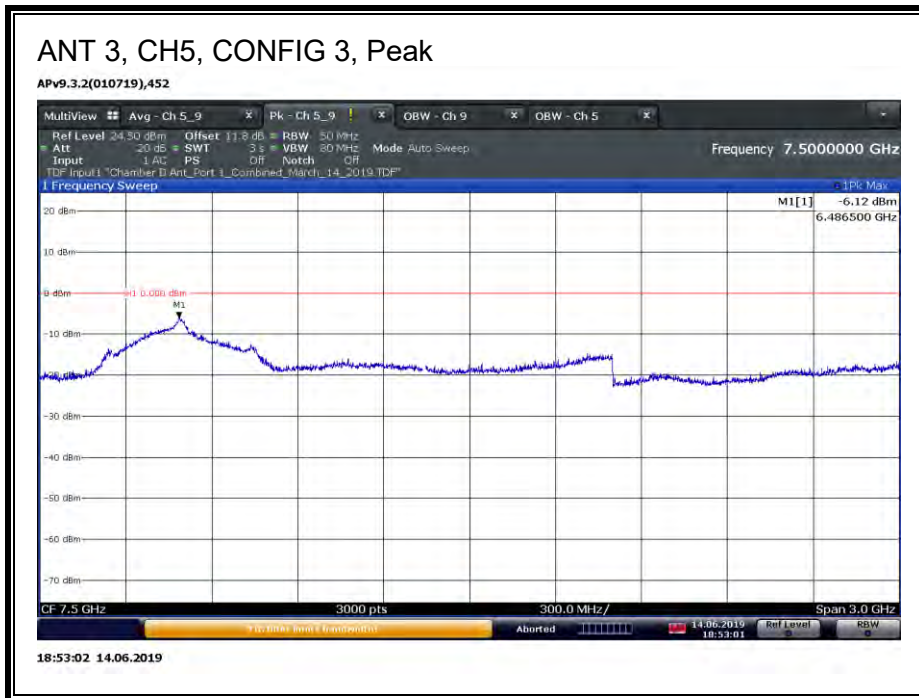


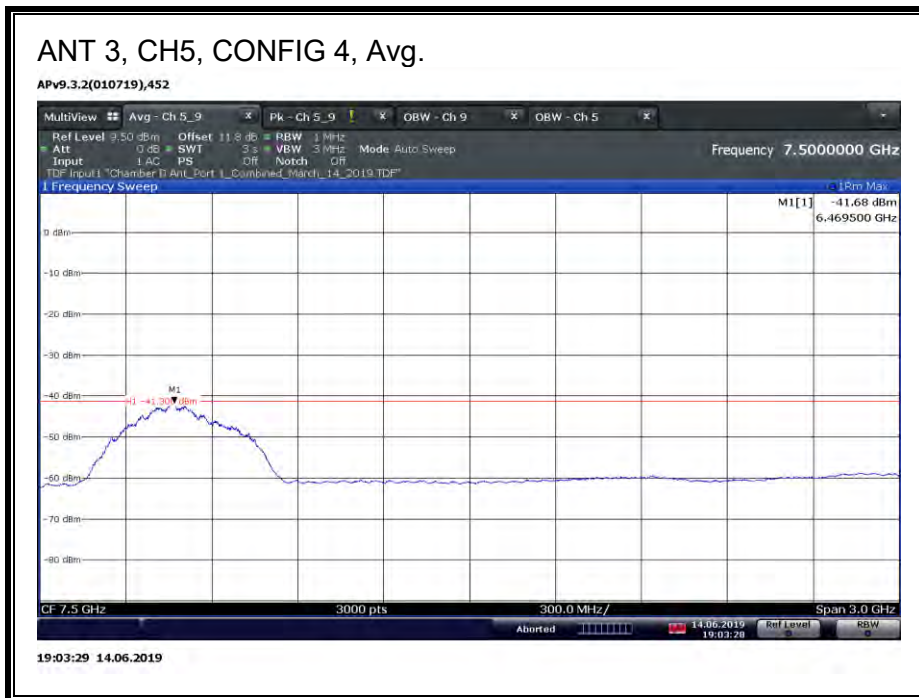
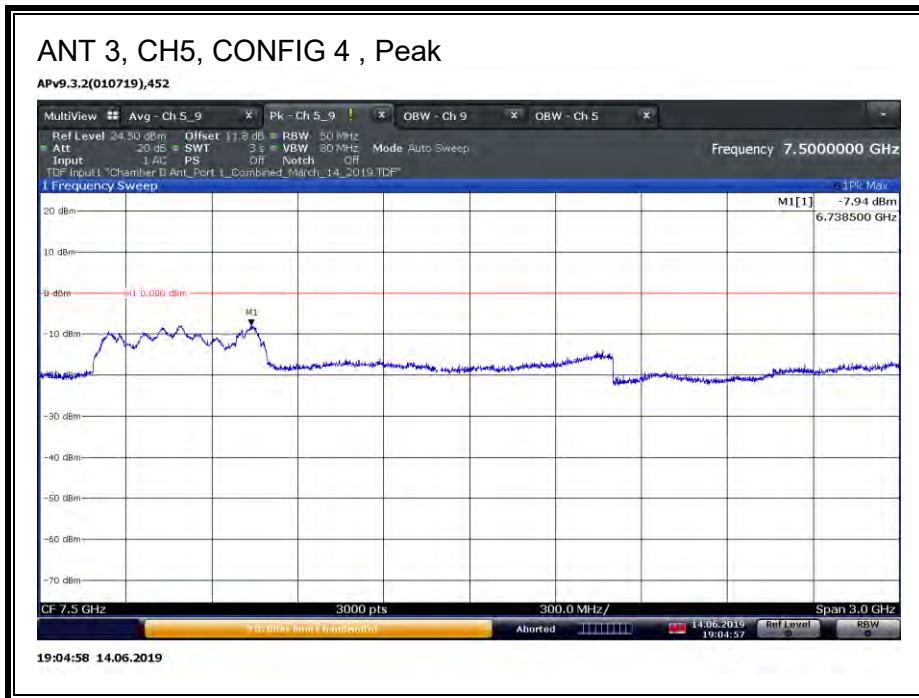


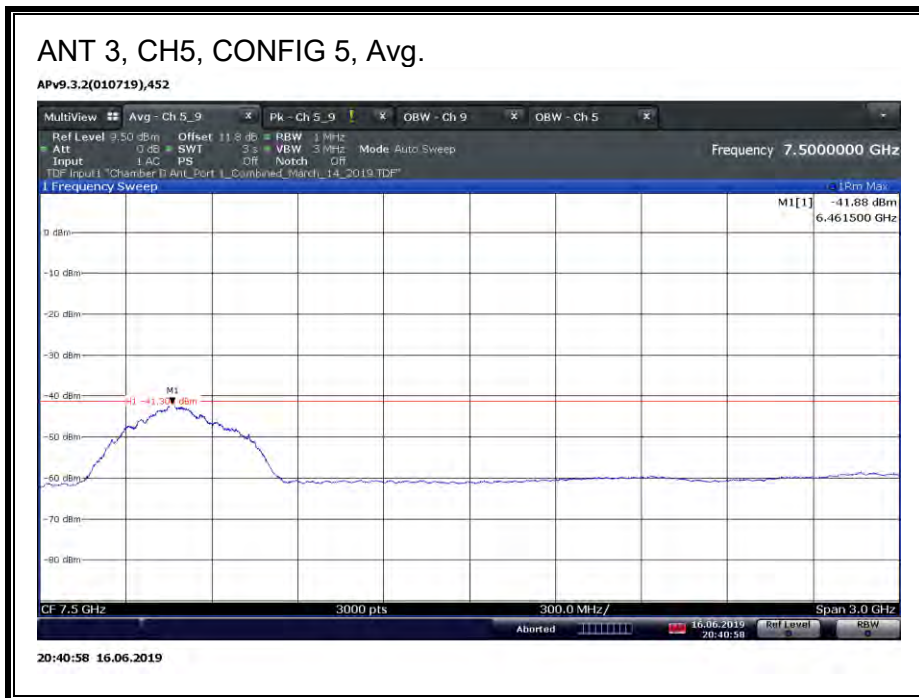
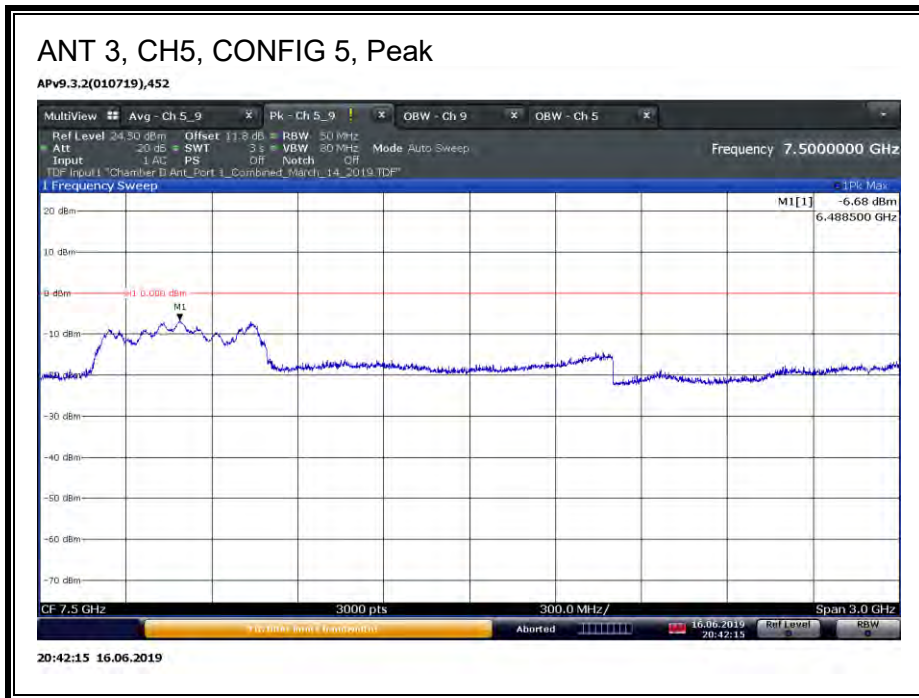


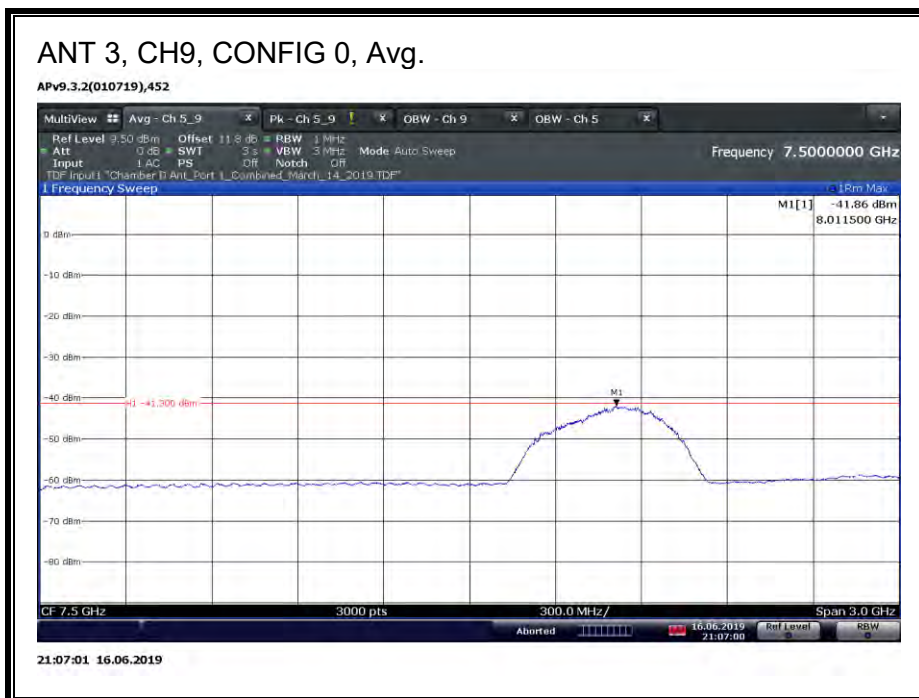
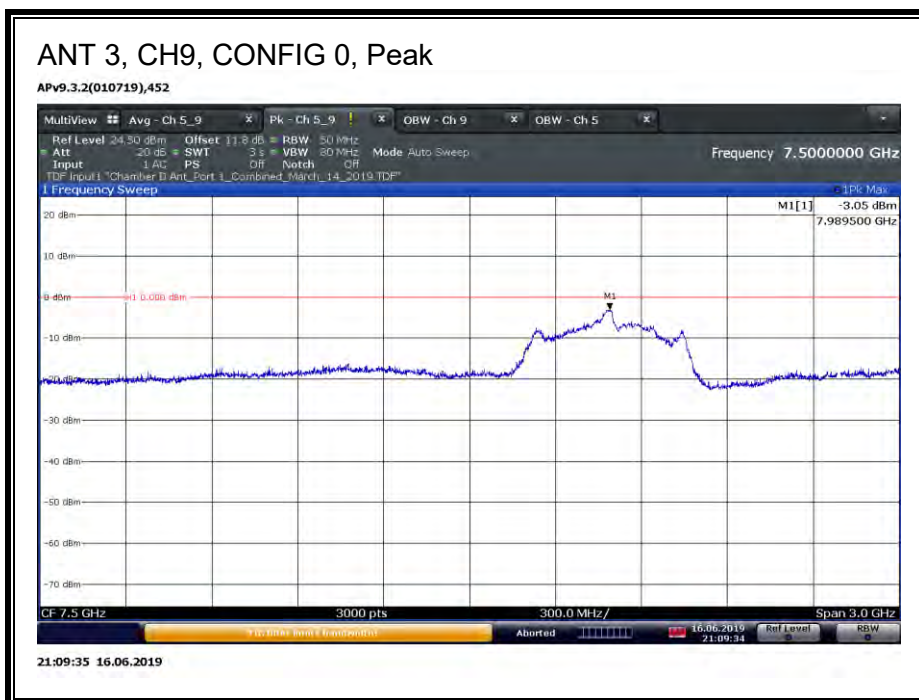


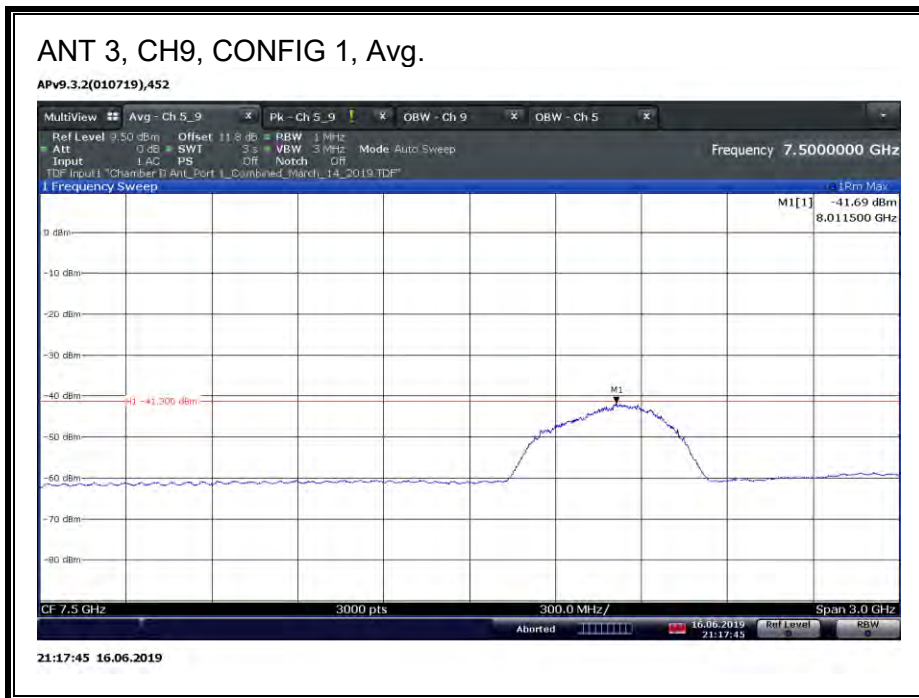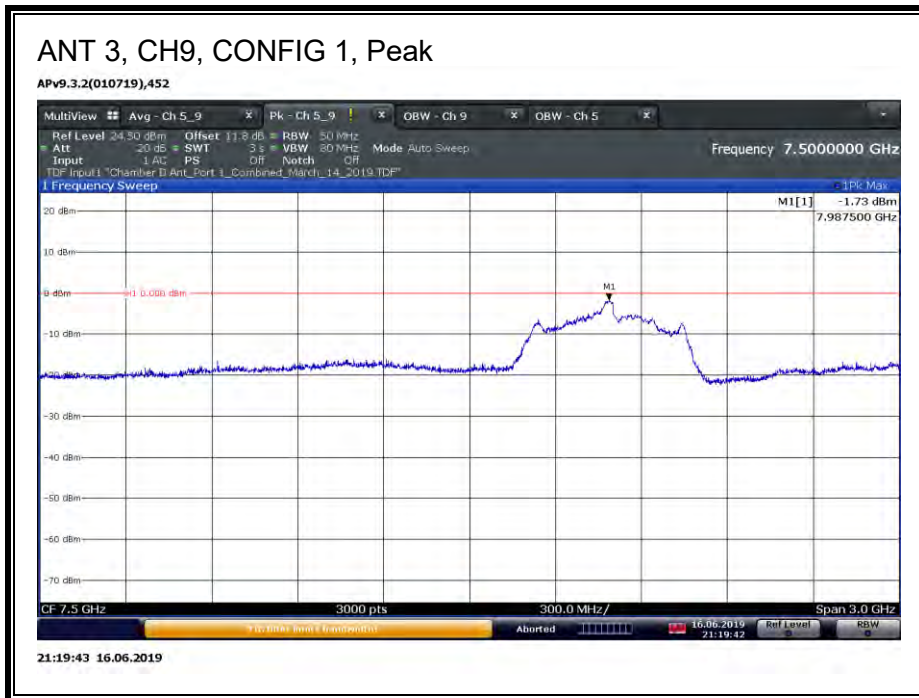

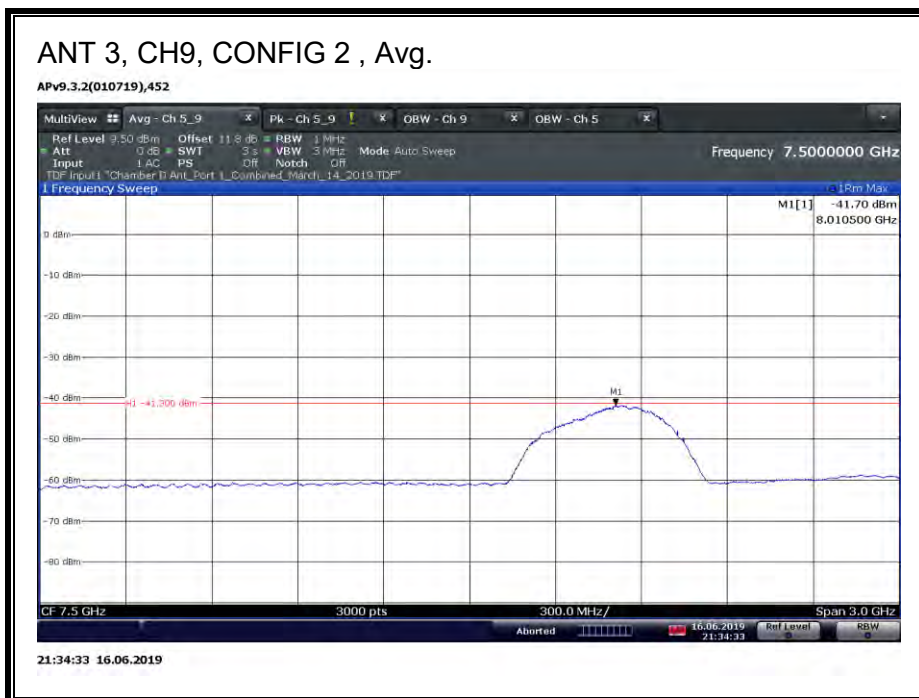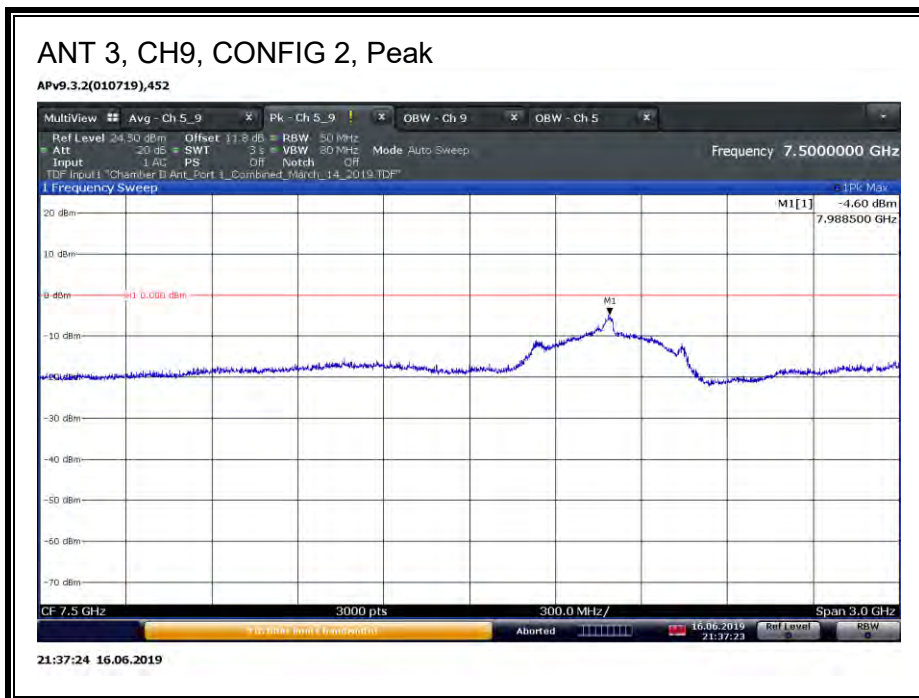

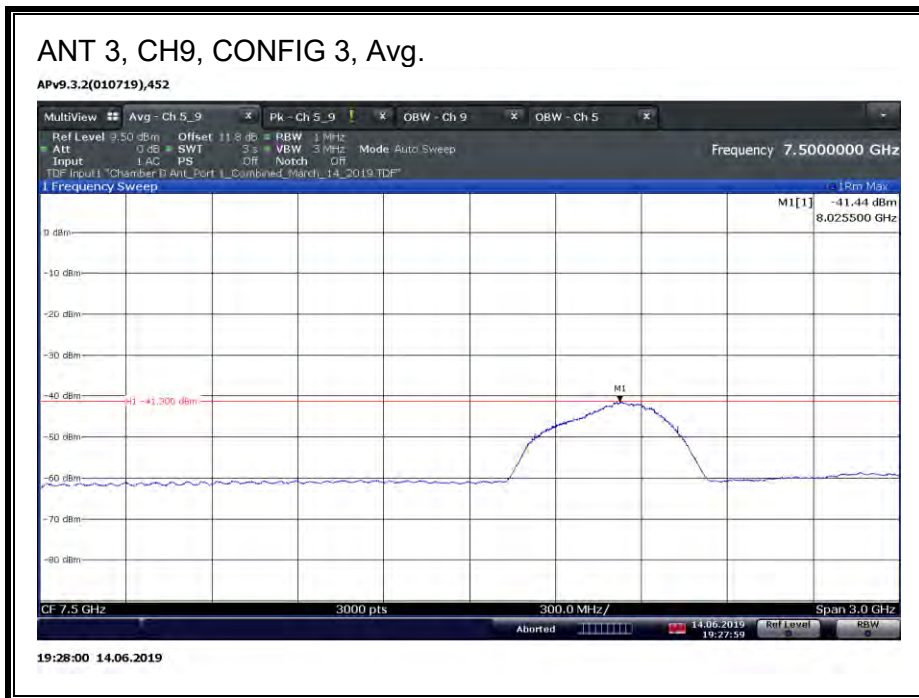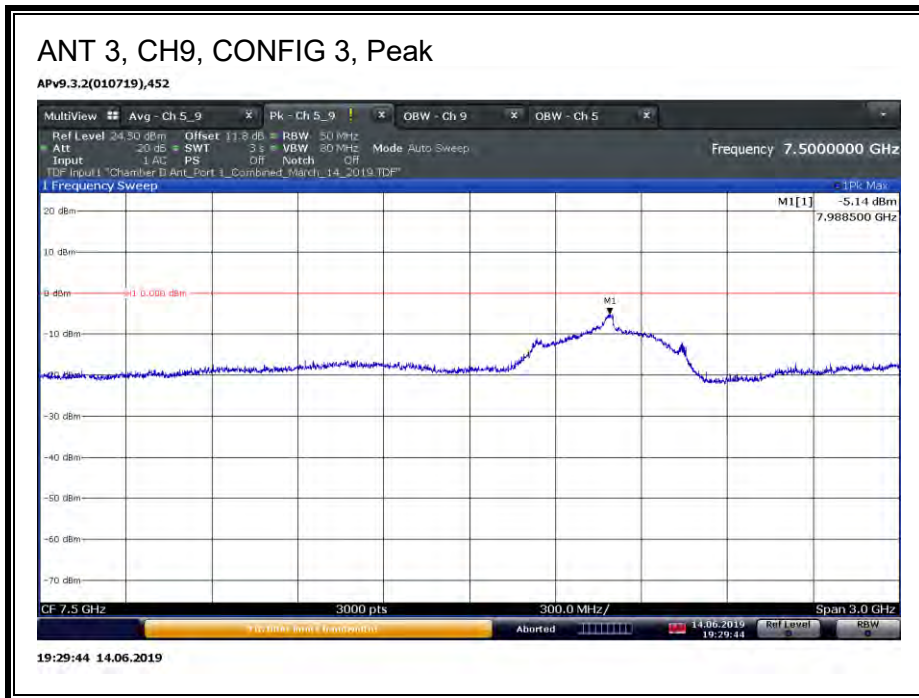

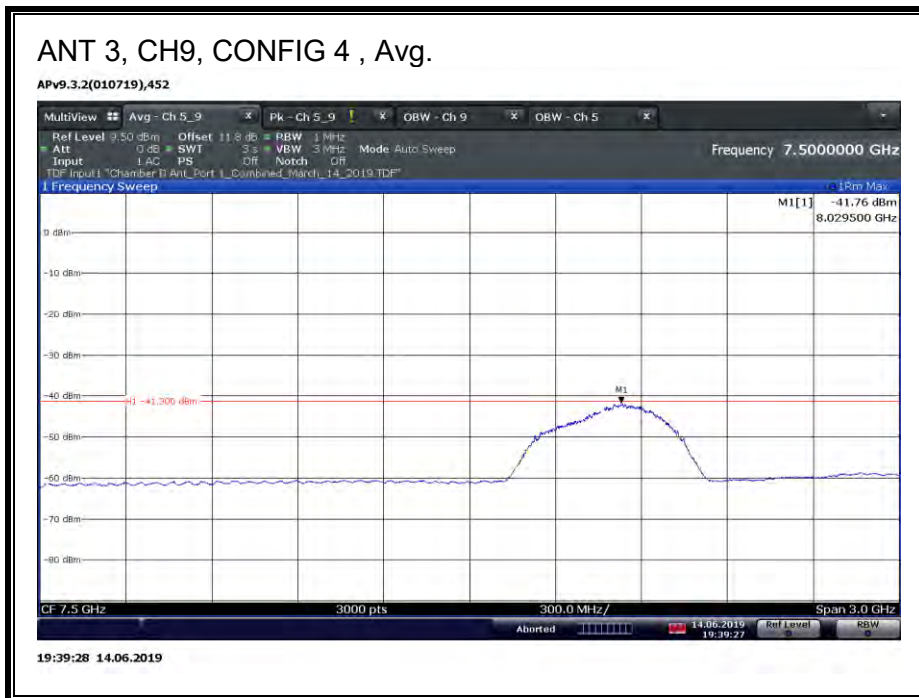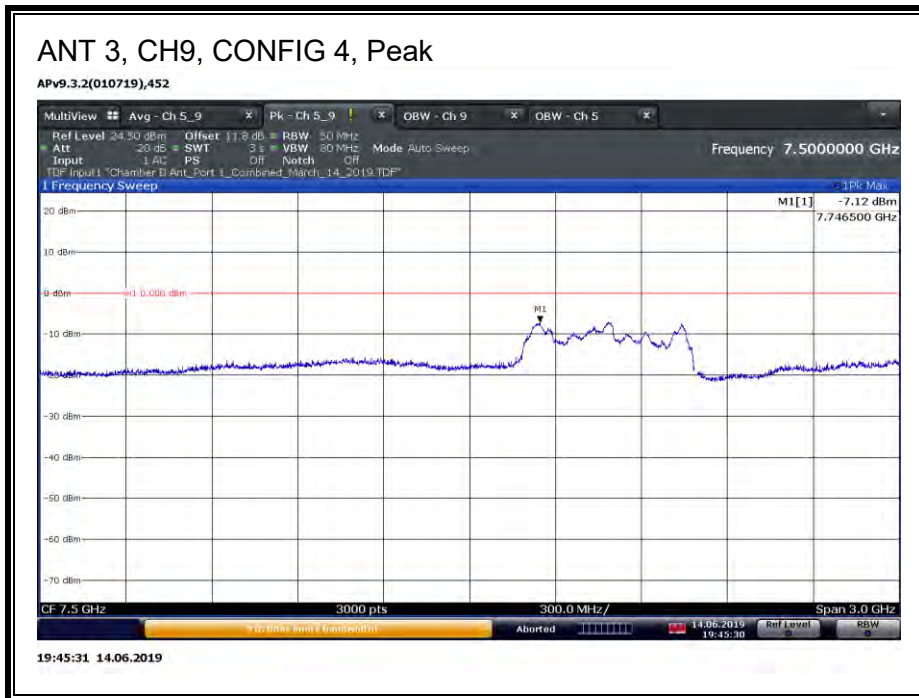

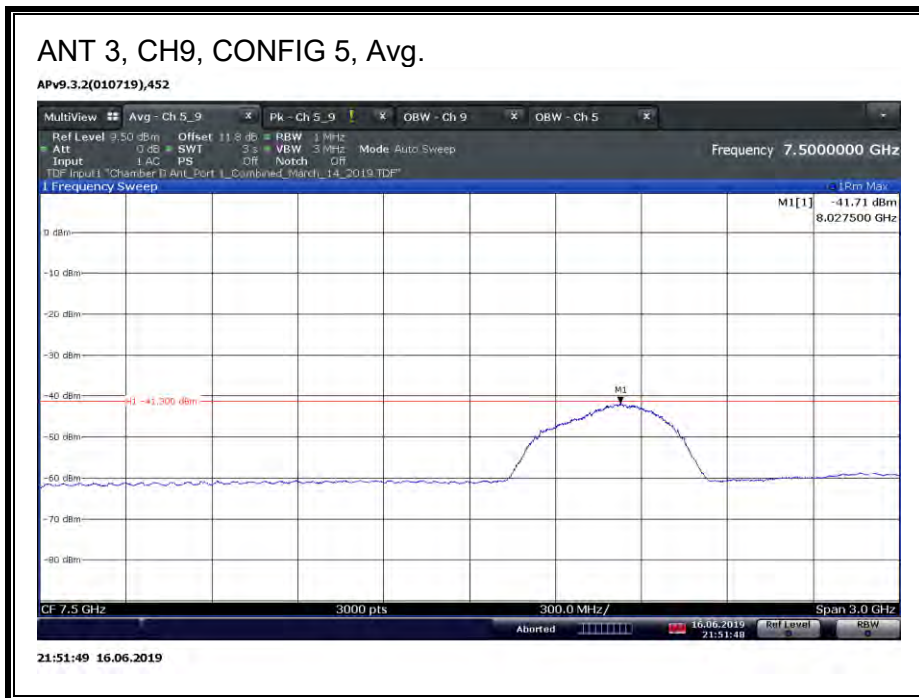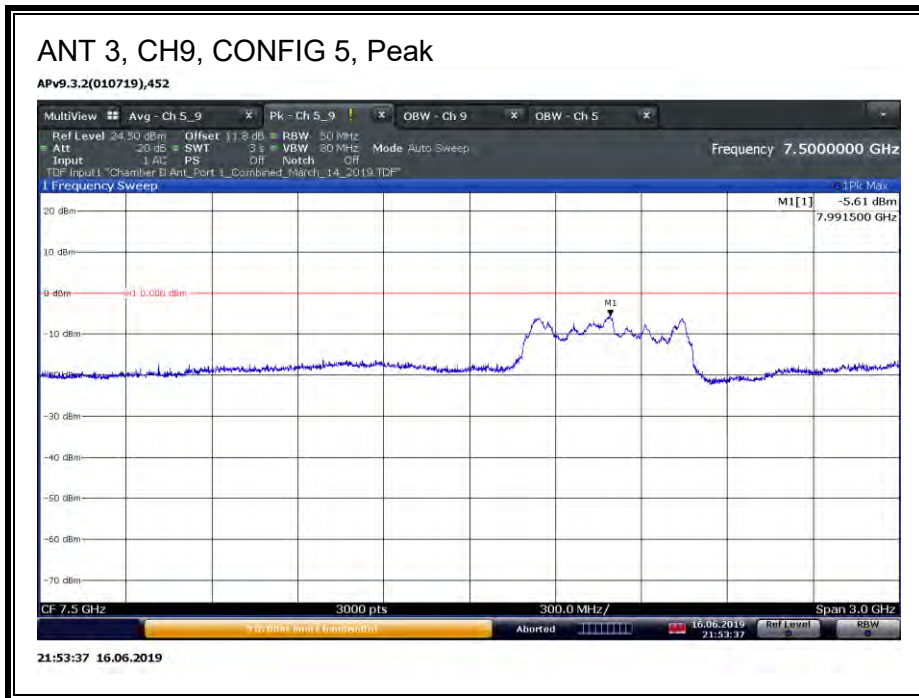

8.3. CESSATION TIME

LIMIT

§15.519(a)(1) A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

TEST PROCEDURES

Transmissions are monitored for two cases:


1. The smart phone ends the UWB link.
2. The EUT ends the UWB link.

RESULTS

Signal Levels on all Plots

- EUT is High Amplitude
- Smart Phone is Low Amplitude


Case 1: Smart Phone ends the UWB link

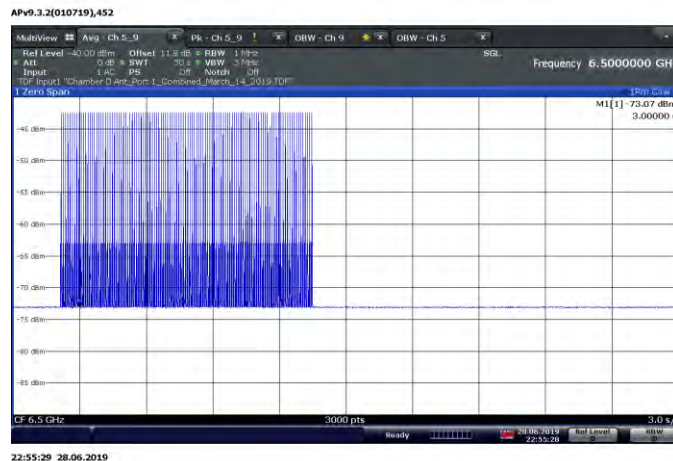

RESULT

- All devices, including the EUT, cease transmissions


Case 2: EUT ends the UWB link

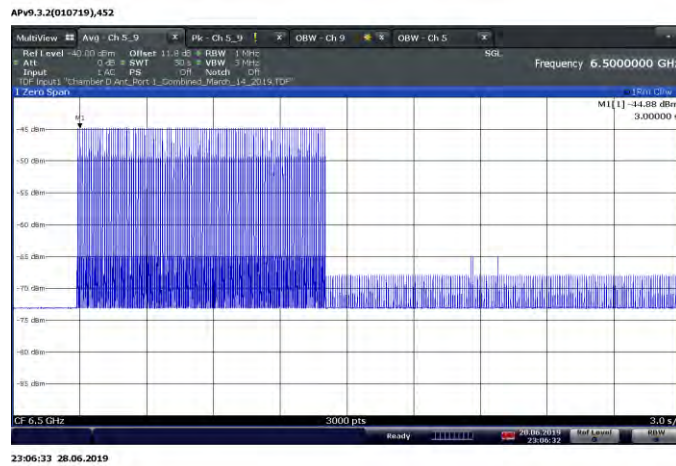

RESULT

- EUT ends the link, Smart Phone stops Acknowledgements but continues Polling
 - EUT ceases transmissions, does not respond to Polling Signals

Zoom-in Plot during On-Off Transition

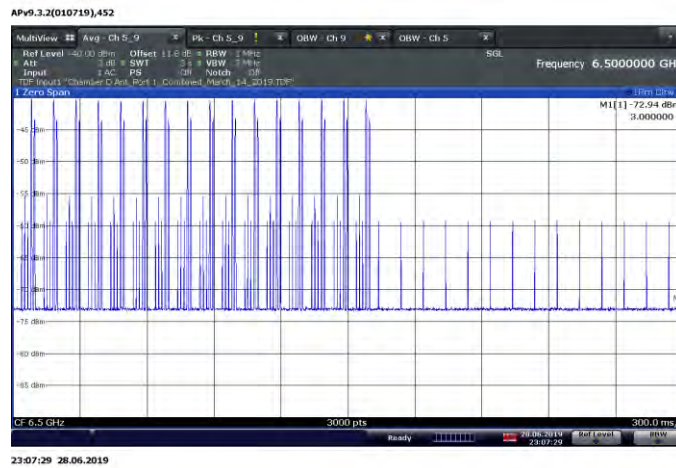

RESULT

- Shows Link Traffic, Acknowledgements and Polling Signals while Link is established
- Shows Polling Signals after Link has ended

8.4. AVERAGE EMISSIONS

LIMIT

§15.519 (3)(c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

15.209 (a)

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

15.519 (3)(c)

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

§15.519 (3)(d) In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

TEST PROCEDURE

ANSI C63.10 Clause 10.2 and 10.3.

PROCEDURE FOR 9 kHz TO 960 MHz

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 3m from the EUT.

PROCEDURE FOR 960 MHz TO 6 GHz

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 0.5m from the EUT.

A low pass filter with a cut off frequency of 6 GHz is used to suppress the fundamental and perform measurement for 0.96 - 6 GHz.

RESULTS FOR 6 GHz TO 9 GHz

The 6 - 9 GHz frequency band is covered in Section 8.2.

PROCEDURE FOR 9 GHz TO 18 GHz

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 0.5m from the EUT.

A high pass filter with pass band frequency beyond 9 GHz is used to suppress the fundamental and perform measurement for 9 - 18 GHz.

PROCEDURE FOR 1.164 TO 1.240 GHz

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 0.5m from the EUT.

RBW = 120kHz & VBW = 360 kHz were used at pre-scan.

PROCEDURE FOR 1.559 – 1.610 GHz

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 0.5m from the EUT.

RBW = 120kHz & VBW = 360 kHz were used at pre-scan.

PROCEDURE FOR 18 GHz TO 40 GHz

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 0.5m from the EUT.

A final test is made at any frequencies at which emissions are found. During this final scan, the antenna is kept no further from the EUT than the maximum distance calculated for each band that yields a minimum system noise floor.

Distance Correction Factor from 3m to 0.5m = $20 \cdot \log(0.5\text{m}/3\text{m}) = -15.56 \text{ dB}$

RESULTS

AVERAGE Emissions Summary

Ant	CH	Config	Payload	Power Setting	Frequency Range						
					9 kHz - 30 MHz	30 - 960 MHz	1164 - 1240 MHz	1559 - 1610 MHz	0.96 - 18 GHz	18 - 26 GHz	26 - 40 GHz
0	5	3	125	Max	PASS	PASS	PASS	PASS	PASS	PASS	PASS
0	9	3	125	Max	PASS	PASS	PASS	PASS	PASS	PASS	PASS
1	5	3	125	Max	PASS	PASS	PASS	PASS	PASS	PASS	PASS
1	9	3	125	Max	PASS	PASS	PASS	PASS	PASS	PASS	PASS
2	5	3	125	Max	PASS	PASS	PASS	PASS	PASS	PASS	PASS
2	9	3	125	Max	PASS	PASS	PASS	PASS	PASS	PASS	PASS
3	5	3	125	Max	PASS	PASS	PASS	PASS	PASS	PASS	PASS
3	9	3	125	Max	PASS	PASS	PASS	PASS	PASS	PASS	PASS