



CERTIFICATION TEST REPORT

Report Number. : 12943451-E12V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA. 95014, U.S.A.

Model : A2218

FCC ID : BCG-E3308A

IC : 579C-E3308A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 9

Date Of Issue:
AUGUST 20, 2019

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	8/14/2019	Initial Issue	Chin Pang
V2	8/20/2019	Addressed TCB question	Joe Vang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. DIFFERENCE IN MODEL NUMBER.....	8
5.3. MAXIMUM OUTPUT POWER.....	8
5.4. WORST-CASE CONFIGURATION AND MODE.....	8
5.5. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	12
7. OCCUPIED BANDWIDTH	13
7.1. CE MODE.....	14
7.2. READER MODE	15
8. RADIATED EMISSION TEST RESULTS.....	16
8.1. LIMITS AND PROCEDURE	16
8.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 - 30 MHz), EUT WITH AC/DC ADAPTER	18
8.2.1. CE MODE.....	18
8.2.2. READER MODE	20
8.3. TX SPURIOUS EMISSION 30 TO 1000 MHz, EUT WITH AC/DC ADAPTER.....	22
8.3.1. CE MODE.....	22
8.3.2. READER MODE	24
9. FREQUENCY STABILITY	26
9.1. CE MODE.....	27
9.2. READER MODE	27
10. AC MAINS LINE CONDUCTED EMISSIONS	28
10.1. CE MODE	29
10.1.1. NORMAL OPERATION WITH ANTENNA PORT TERMINATED, 848Kbps.....	29
10.1.2. NORMAL OPERATION WITHOUT ANTENNA PORT TERMINATED, 848Kbps	

10.2.	READER MODE.....	33
10.2.1.	NORMAL OPERATION WITH ANTENNA PORT TERMINATED, 848Kbps.....	33
10.2.2.	NORMAL OPERATION WITHOUT ANTENNA PORT TERMINATED, 848Kbps	35
11.	SETUP PHOTOS	37

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A2218

SERIAL NUMBER: G6TYW00BN39Y (Conducted), G6TYW01EN39M (Radiated)


DATE TESTED: MAY 1, 2019 – August 08, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies
ISED RSS-210 Issue 9, Annex B	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



Mengistu Mekuria
Senior Test Engineer
UL VERIFICATION SERVICES INC.

Prepared By:



Tony Wang
LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 5, and RSS-210 Issue 9.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (ISED:2324B-1)	☒ Chamber D (ISED:22541-1)
☐ Chamber B (ISED:2324B-2)	☐ Chamber E (ISED:22541-2)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)
	☐ Chamber G (ISED:22541-4)
	☒ Chamber H (ISED:22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under ISED Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at [NVLAP Lab Search](#).

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wide band, GPS and NFC. All models support at least one UICC based SIM. The second SIM, if present, is either UICC based pSIM (physical SIM) or e-SIM (electronic SIM). The device has a built-in inductive charging receiver. The rechargeable battery is also not user accessible

5.2. DIFFERENCE IN MODEL NUMBER

5.3. MAXIMUM FIELD STRENGTH

The transmitter has a maximum peak radiated magnetic field strength as follows:

Frequency Range (MHz)	Mode		Kbps	E Field at 30m distance (dBuV/m)
13.56	Type B	CE	848	19.98
		Reader	848	21.05

5.4. WORST-CASE CONFIGURATION AND MODE

The fundamental of the EUT was investigated under three orthogonal orientations X (Flatbed), Y (Landscape), and Z (Portrait). The Y (Landscape orientation) was determined to be the worst-case orientation.

The worst case position of the EUT was investigated under two configurations: EUT with power supply, EUT with earphones. The EUT with power supply configuration was determined to be worst-case configurations; therefore, all final tests were performed on the EUT with power supply.

In addition, Type A, B and F with CE mode and Reader mode data rates and ISO 15693 were investigated to determine the worst case based on the highest power and spurious emissions. Type B was determined to be the worst case and therefore Type B was selected for all final tests.

For below 30MHz testing, investigation was done on three antenna orientations: RX antenna Face-on, Face-off and horizontal (parallel to ground). The worst-case configurations were determined on RX antenna Face-on and Face-off; therefore, all final tests were performed using these two orientations.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
laptop	Apple	Macbook Pro	C02P41RZG086	FCC DoC
Laptop AC/DC adapter	Liteon Technology	PA-1450-BA1	B123	NA
EUT AC Adapter	Apple	A1385	D292365CDYADHLC3	NA


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-Shielded	1	N/A


TEST SETUP

The EUT is installed in a host laptop computer during the tests. Test software exercised the EUT.

SETUP DIAGRAM FOR RADIATED TESTS

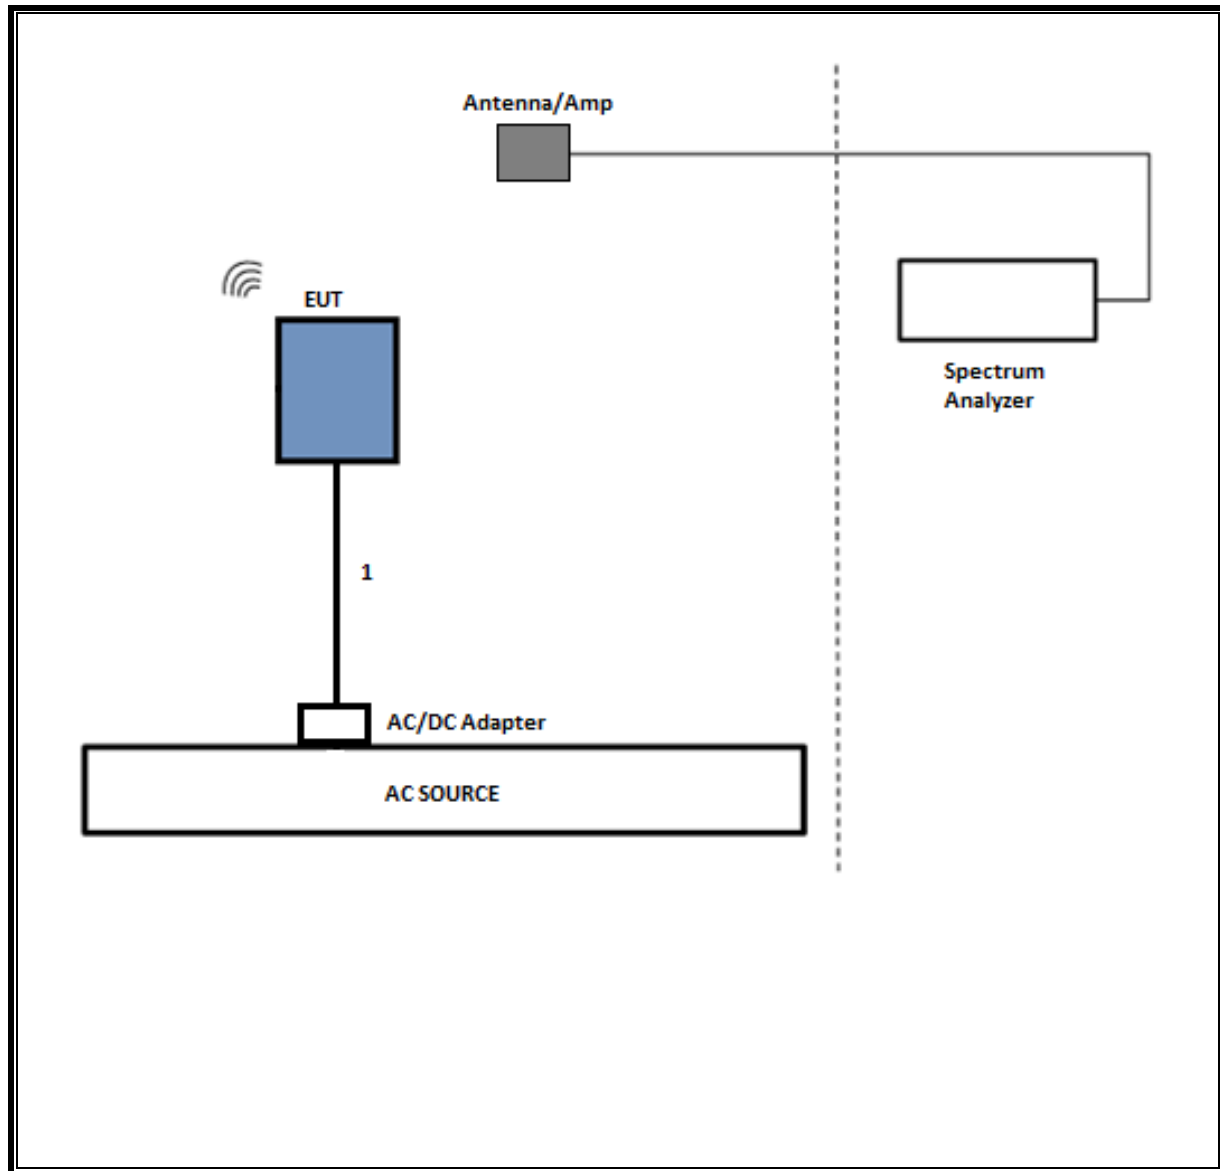

SETUP DIAGRAM FOR LINE CONDUCTED TESTS

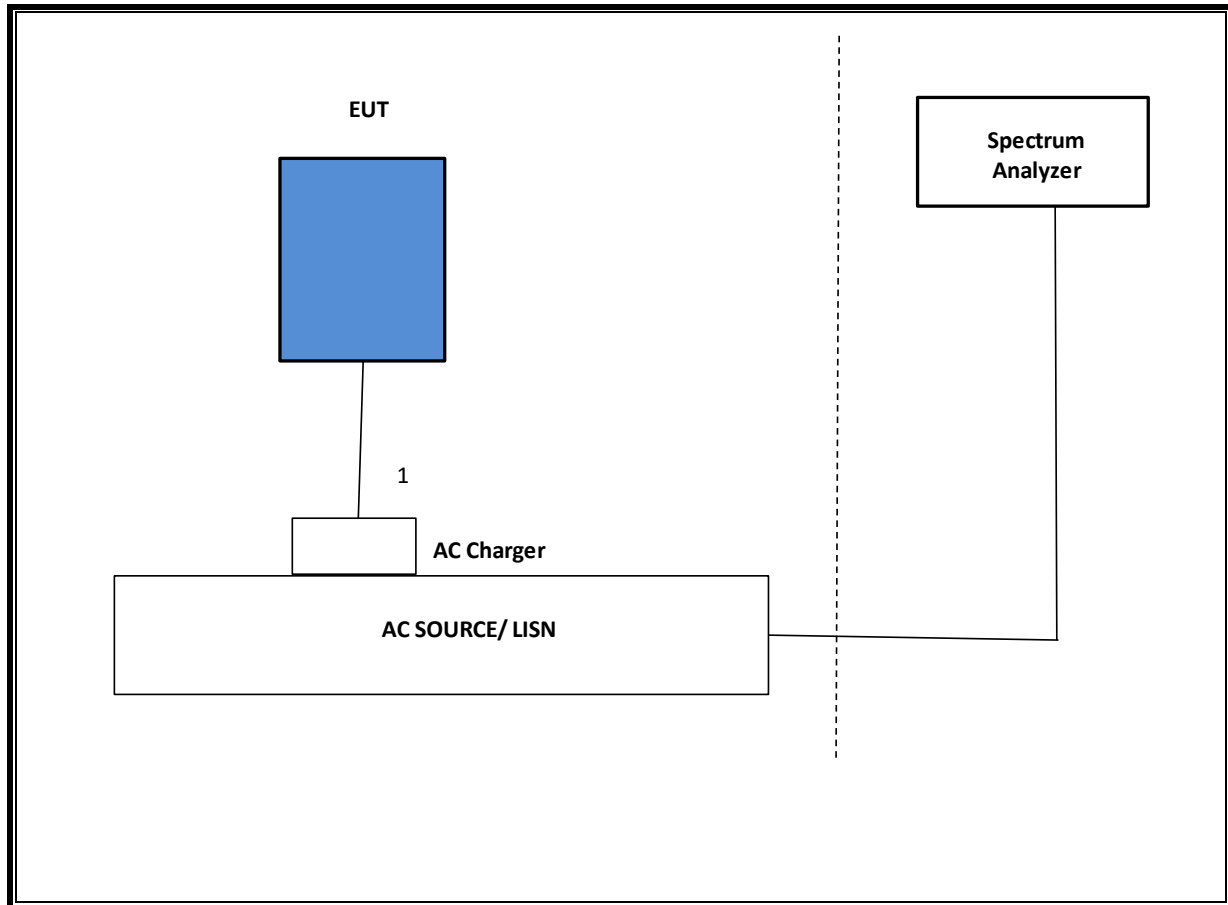

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T15	10/20/2019
Hybrid Antenna, 30-3Ghz	SunAR rf Motion	JB3	PRE0181574	08/01/2019
Spectrum Analyzer, PSA, 3Hz to 44GHz	Agilent (Keysight) Technologies	E4446A	T189	01/29/2020
Chamber, Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	T754	08/15/2019
Antenna, Active Loop 9KHz to 30MHz	EMCO	6502	T35	06/06/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T342	01/23/2020
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESC17	T1436	02/14/2020
Power Cable, Line Conducted Emissions	UL	PG1	T861	08/31/2019
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/19/2019
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

*Testing is completed before equipment expiration date.

7. OCCUPIED BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Type A with highest data rate. The transmitter output is connected to the spectrum analyzer. The RBW is set to 10kHz. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

Note: Because the measured signal is CW or CW-like adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW

RESULTS

99% and 20dB BW

CE MODE


Mode Kbps	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
848	13.56	22.1934	25.229

READER MODE

Mode Kbps	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
848	13.56	21.9395	25.465


7.1. CE MODE

848Kbps

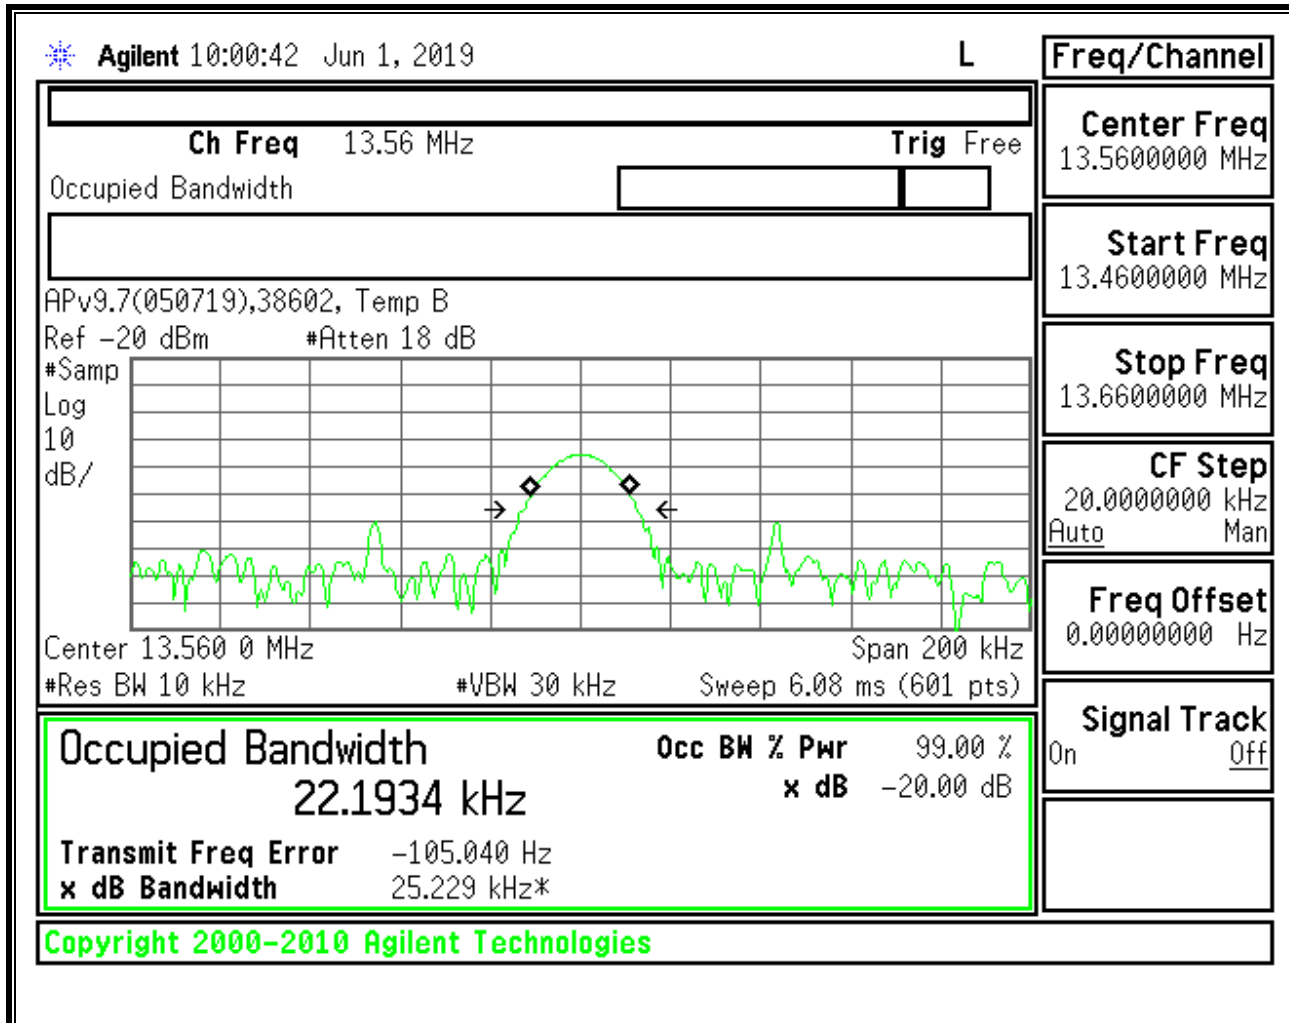

7.2. READER MODE

848Kbps

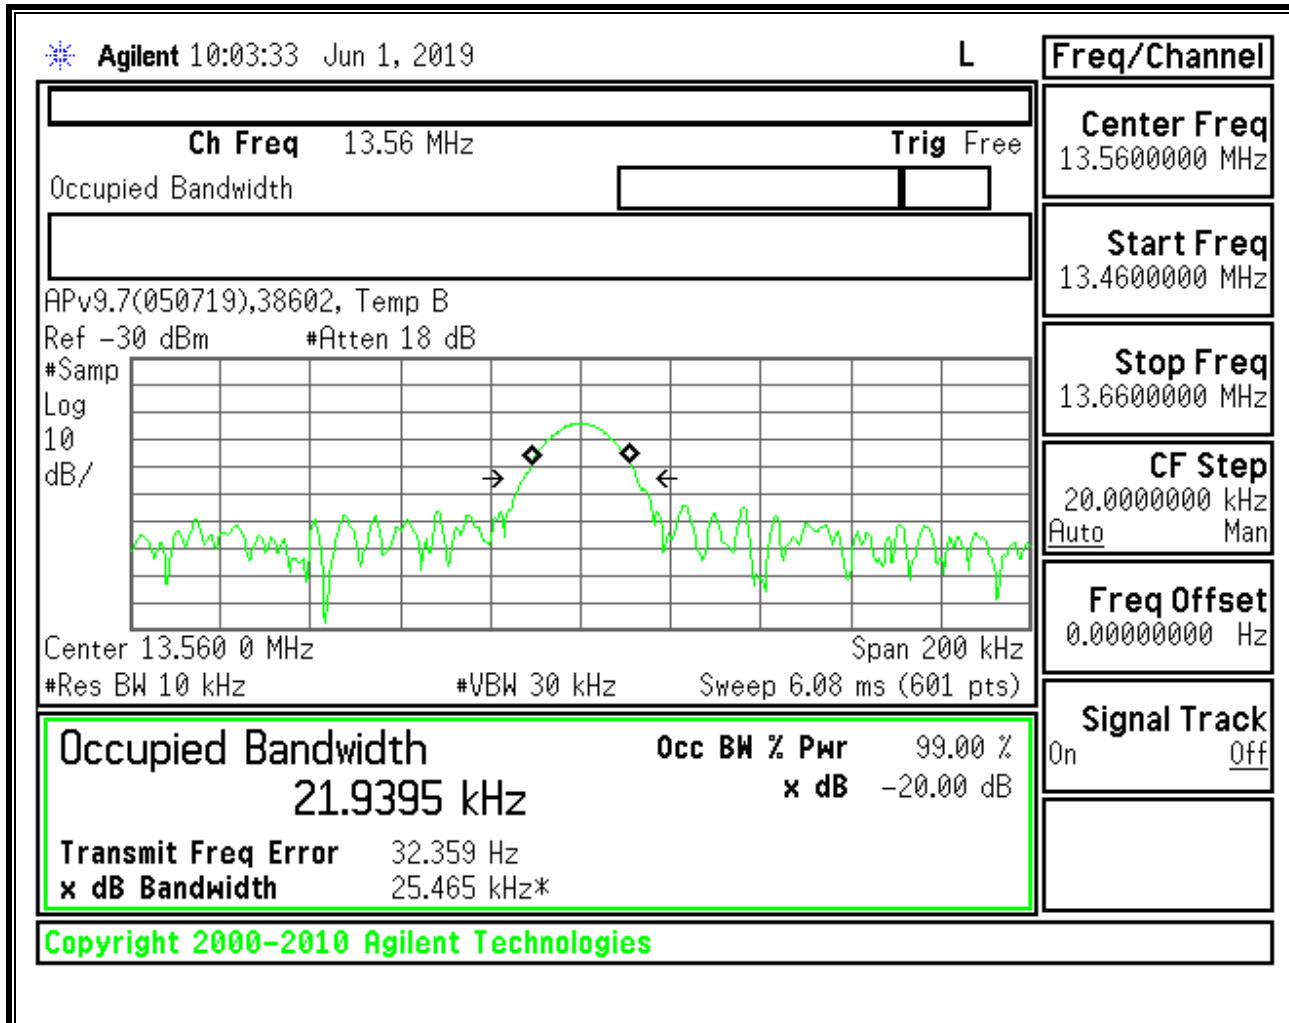

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225

IC RSS-210, Annex B.6

IC RSS-GEN, Section 8.9 (Transmitter)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the field strength from µV/m to dBµV/m is:

Limit (dBµV/m) = 20 log limit (µV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE

ANSI C63.10, 2013


The EUT is an intentional radiator that incorporates a digital device, the highest fundamental frequency generated or used in the device is 13.56 MHz; therefore, the frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater.

RESULTS

8.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 - 30 MHz), EUT WITH AC/DC ADAPTER

8.2.1. CE MODE

FUNDAMENTAL 848Kbps

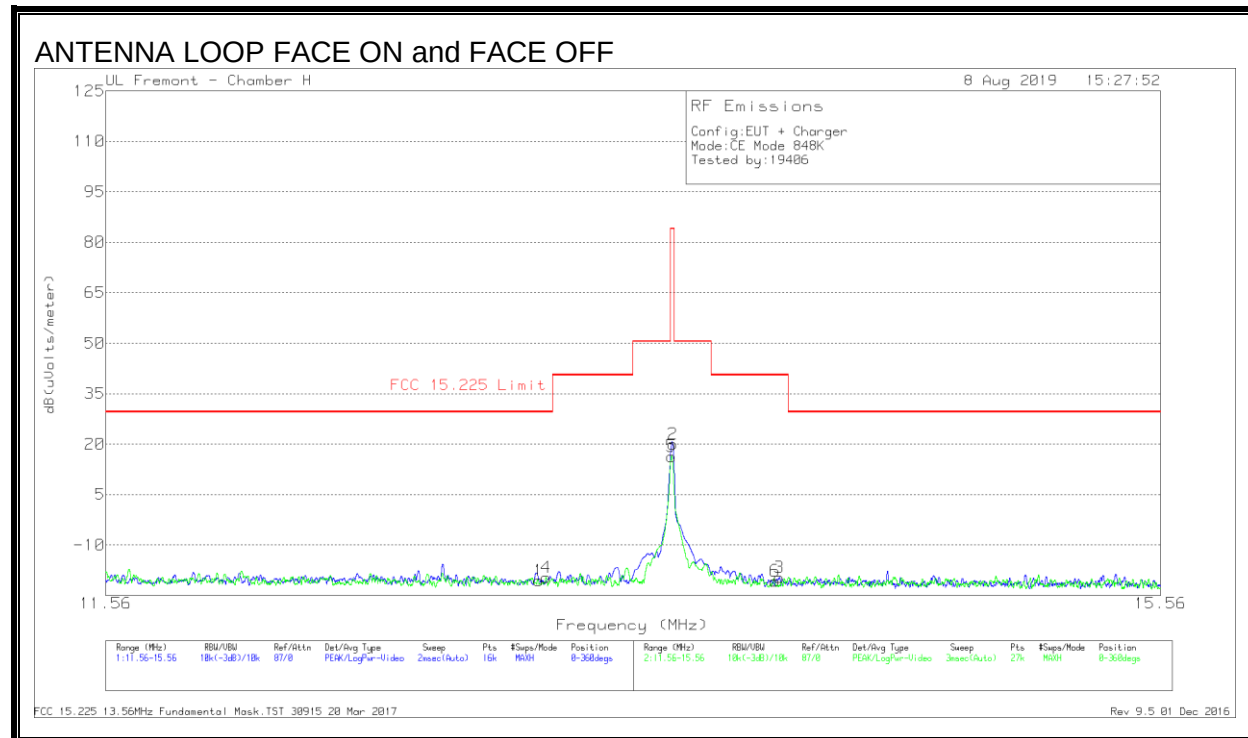

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dBm)	Cables (dB)	Dist Corr (dB) 40Log	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	PK Margin (dB)	Azimuth (Degs)
1	13.06	8.24	Pk	10.7	.4	-40	-20.66	29.54	-50.2	0-360
4	13.08655	9.26	Pk	10.7	.4	-40	-19.64	29.54	-49.18	0-360
5	13.55874	45.38	Pk	10.6	.4	-40	16.38	84	-67.62	0-360
2	13.56225	48.98	Pk	10.6	.4	-40	19.98	84	-64.02	0-360
6	13.9576	8.32	Pk	10.6	.4	-40	-20.68	40.51	-61.19	0-360
3	13.97663	9.32	Pk	10.6	.4	-40	-19.68	40.51	-60.19	0-360


Pk - Peak detector

FCC 15.225 13.56MHz Fundamental Mask.TST 30915 20 Mar 2017

Rev 9.5 01 Dec 2016

SPURIOUS EMISSION 848Kbps

ANTENNA LOOP FACE ON and FACE OFF

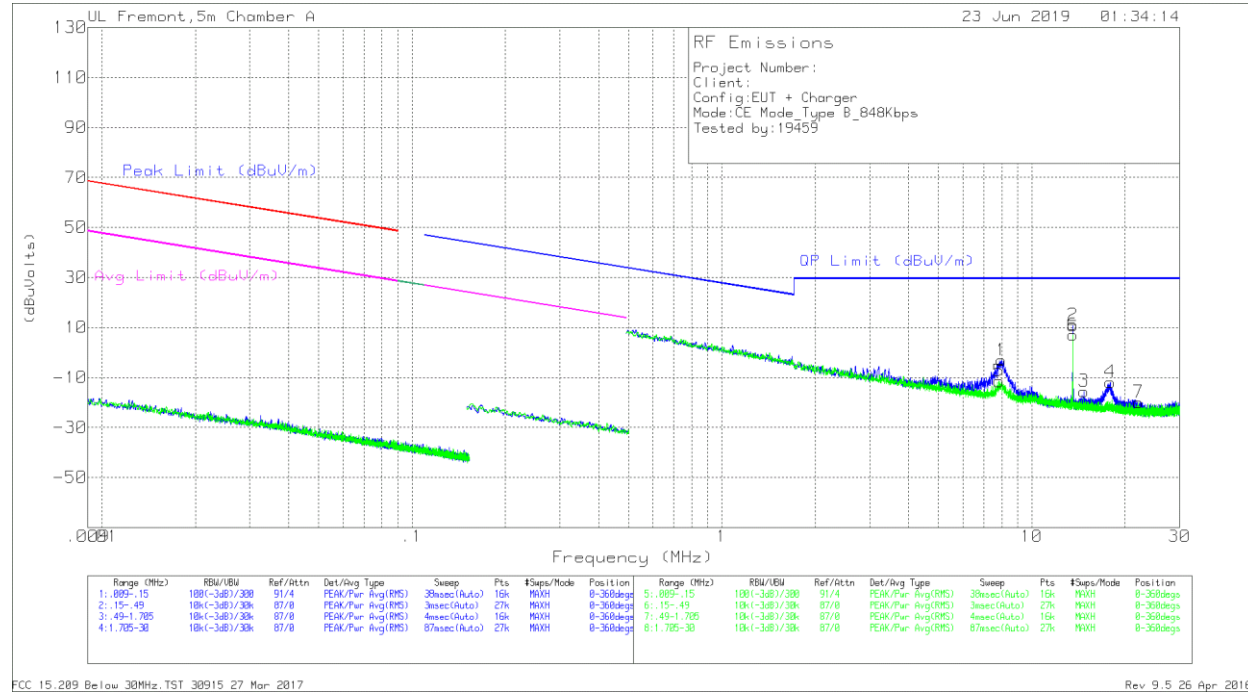

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cables (dB)	Dist Corr 30m	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
5	7.84314	17.38	Pk	10.7	.4	-40	-11.52	29.5	-41.02	0-360
1	7.96575	25.77	Pk	10.7	.4	-40	-3.13	29.5	-32.63	0-360
2	13.5605	40.09	Pk	10.2	.5	-40	10.79	29.5	-18.71	0-360
6	13.5605	36.3	Pk	10.2	.5	-40	7	29.5	-22.5	0-360
3	14.74841	13.88	Pk	10.1	.5	-40	-15.52	29.5	-45.02	0-360
4	17.9228	17.79	Pk	9.7	.6	-40	-11.91	29.5	-41.41	0-360
7	22.08231	10.46	Pk	9	.6	-40	-19.94	29.5	-49.44	0-360

Pk - Peak detector


FCC 15.209 Below 30MHz.TST 30915 28 Apr 2017

Rev 9.5 01 Dec 2016

Note: Marker 2 and 6 are the fundamental signal.

8.2.2. READER MODE

FUNDAMENTAL 848Kbps

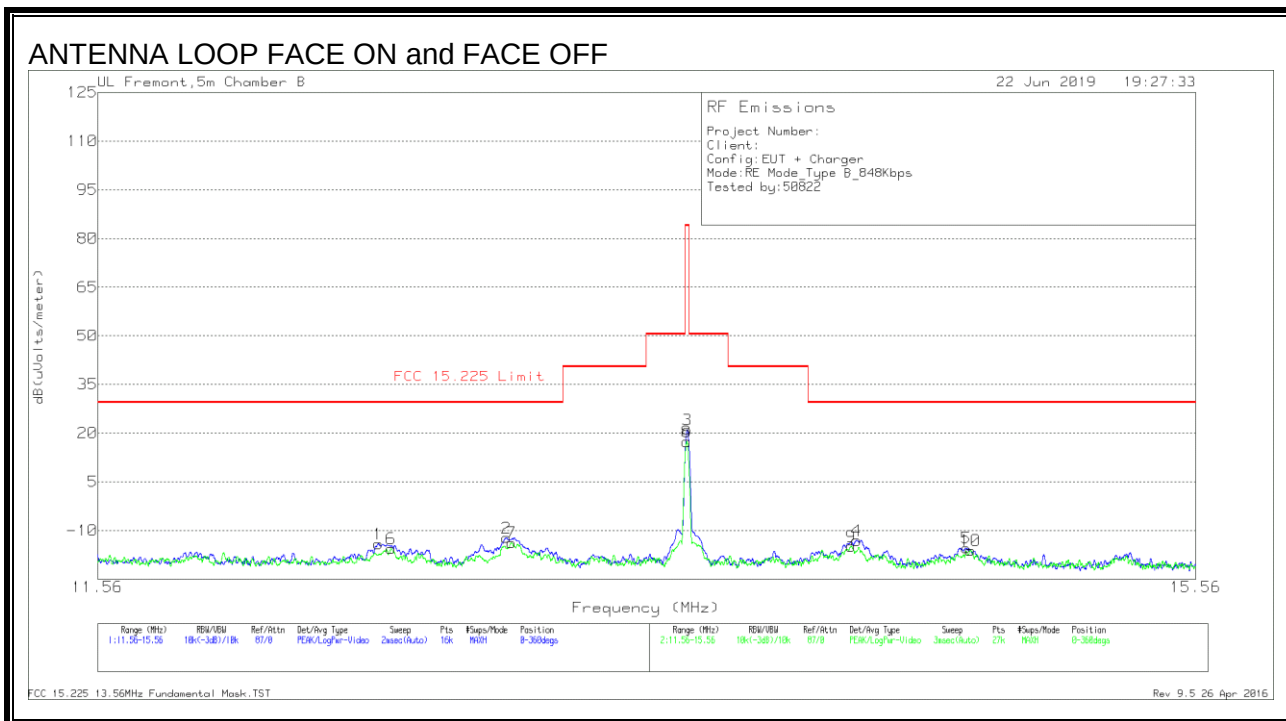


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cables (dB)	Dist Corr (dB) 40Log	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	PK Margin (dB)	Azimuth (Degs)
1	12.47263	14.6	Pk	10.8	.5	-40	-14.1	29.54	-43.64	0-360
6	12.51571	13.23	Pk	10.7	.5	-40	-15.57	29.54	-45.11	0-360
2	12.91263	16.59	Pk	10.7	.5	-40	-12.21	29.54	-41.75	0-360
7	12.93011	15.03	Pk	10.7	.5	-40	-13.77	29.54	-43.31	0-360
8	13.55822	46.31	Pk	10.6	.5	-40	17.41	84	-66.59	0-360
3	13.56025	49.95	Pk	10.6	.5	-40	21.05	84	-62.95	0-360
9	14.17464	14.04	Pk	10.6	.5	-40	-14.86	29.54	-44.4	0-360
4	14.19613	15.86	Pk	10.6	.5	-40	-13.04	29.54	-42.58	0-360
5	14.62288	13.66	Pk	10.5	.5	-40	-15.34	29.54	-44.88	0-360
10	14.63981	12.9	Pk	10.5	.5	-40	-16.1	29.54	-45.64	0-360

Pk - Peak detector

FCC 15.225 13.56MHz Fundamental Mask.TST
Rev 9.5 26 Apr 2016

SPURIOUS EMISSION 848Kbps

ANTENNA LOOP FACE ON and FACE OFF

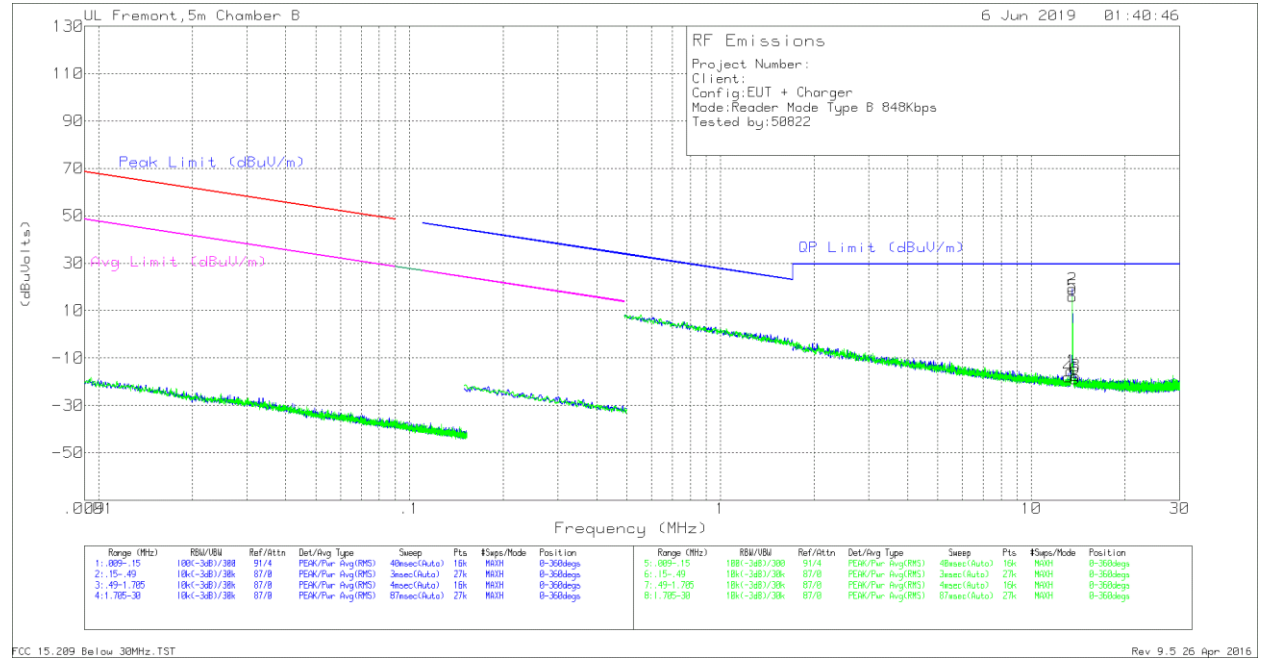

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cables (dB)	Dist Corr (dB) 40Log	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
4	13.13449	10.5	Pk	11	.5	-40	-18	29.5	-47.5	0-360
1	13.37553	13.04	Pk	11	.5	-40	-15.46	29.5	-44.96	0-360
2	13.5605	47.68	Pk	11	.5	-40	19.18	29.5	-10.32	0-360
5	13.56102	44.47	Pk	11	.5	-40	15.97	29.5	-13.53	0-360
6	13.83665	9.85	Pk	11	.5	-40	-18.65	29.5	-48.15	0-360
3	13.89534	11.01	Pk	11	.5	-40	-17.49	29.5	-46.99	0-360

Pk - Peak detector

FCC 15.209 Below 30MHz.TST 30915 28 Apr 2017


Rev 9.5 01 Dec 2016


Note: Marker 2 and 5 are the fundamental signal.

8.3. TX SPURIOUS EMISSION 30 TO 1000 MHz, EUT WITH AC/DC ADAPTER

8.3.1. CE MODE

SPURIOUS EMISSION 848Kbps

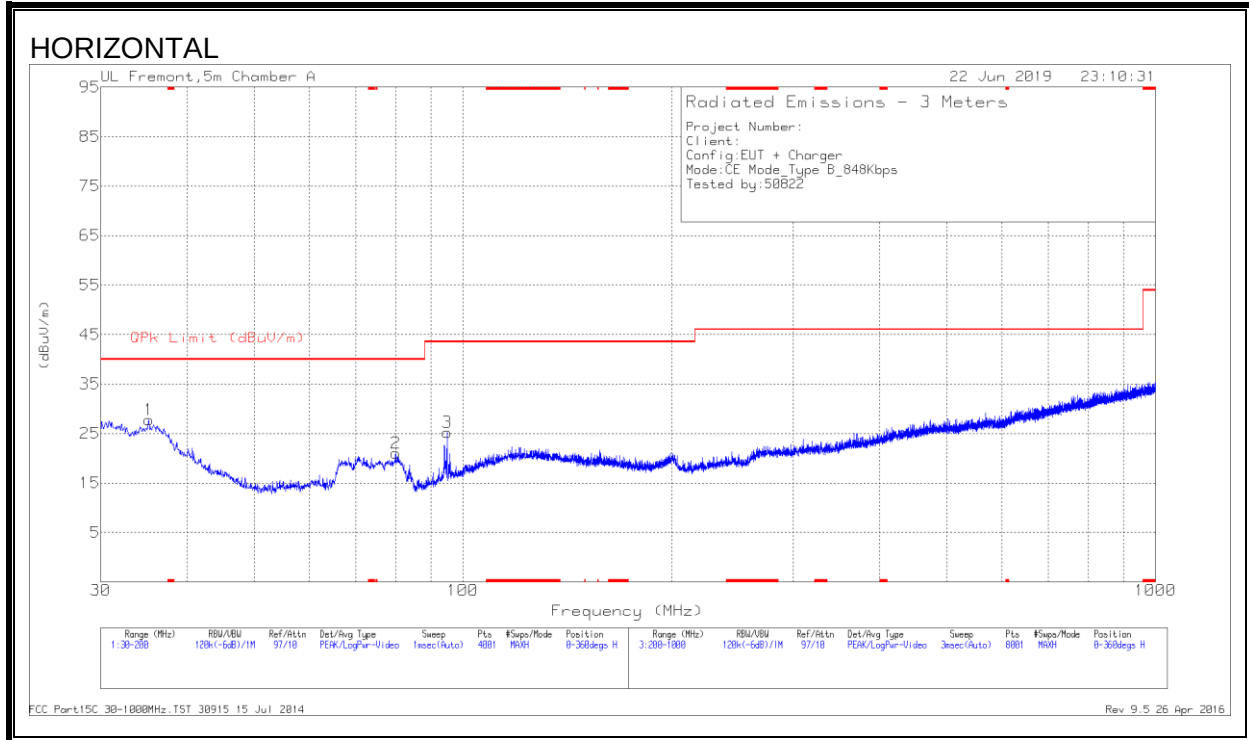

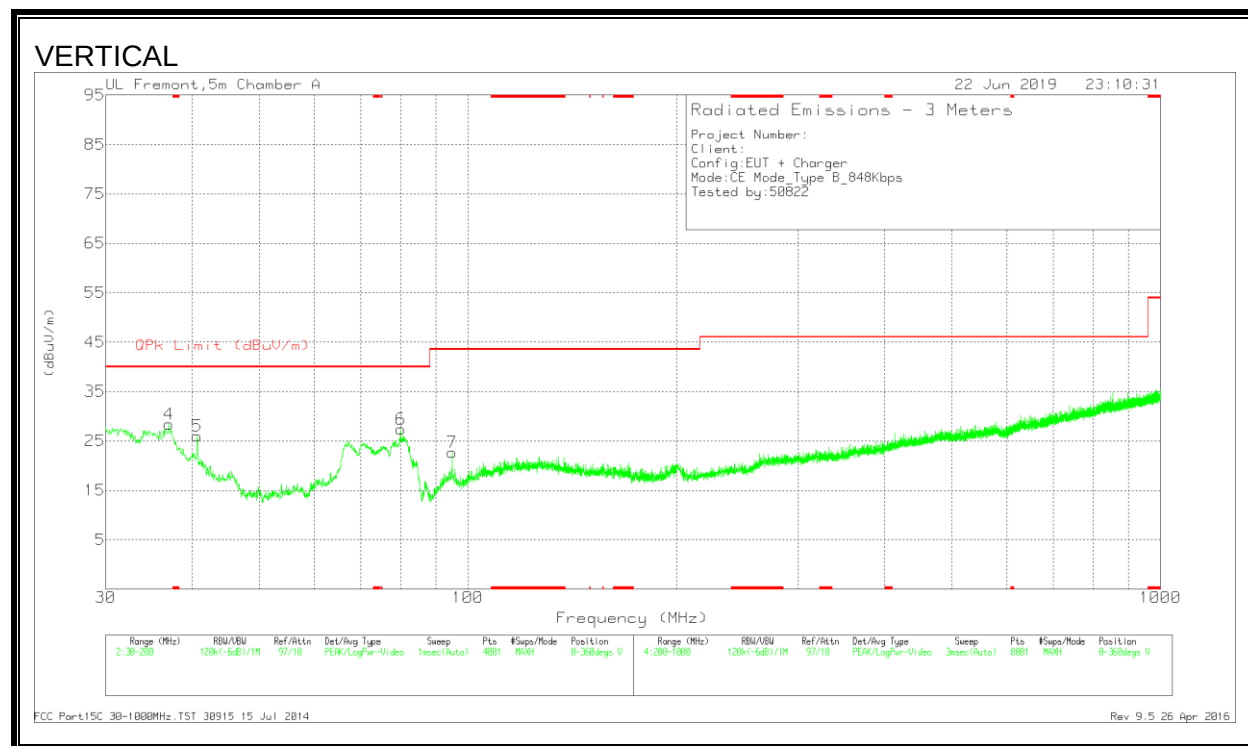

Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	AF PRE0181574 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBUV/m)	QPk Limit (dBUV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	35.185	31.56	Pk	23.4	-27.2	27.76	40	-12.24	0-360	200	H
4	37.0338	33.72	Pk	21.8	-27.1	28.42	40	-11.58	0-360	100	V
5	40.6675	34.24	Pk	18.9	-27.1	26.04	40	-13.96	0-360	100	V
2	79.98	34.17	Pk	13.4	-26.5	21.07	40	-18.93	0-360	200	H
6	80.0225	40.51	Pk	13.4	-26.5	27.41	40	-12.59	0-360	100	V
3	94.8975	36.73	Pk	14.8	-26.3	25.23	43.52	-18.29	0-360	200	H
7	94.8975	34.13	Pk	14.8	-26.3	22.63	43.52	-20.89	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



Pk - Peak detector

FCC Part15C 30-1000MHz.TST 30915 15 Jul 2014

Rev 9.5 01 Dec 2016

8.3.2. READER MODE

SPURIOUS EMISSION 848Kbps

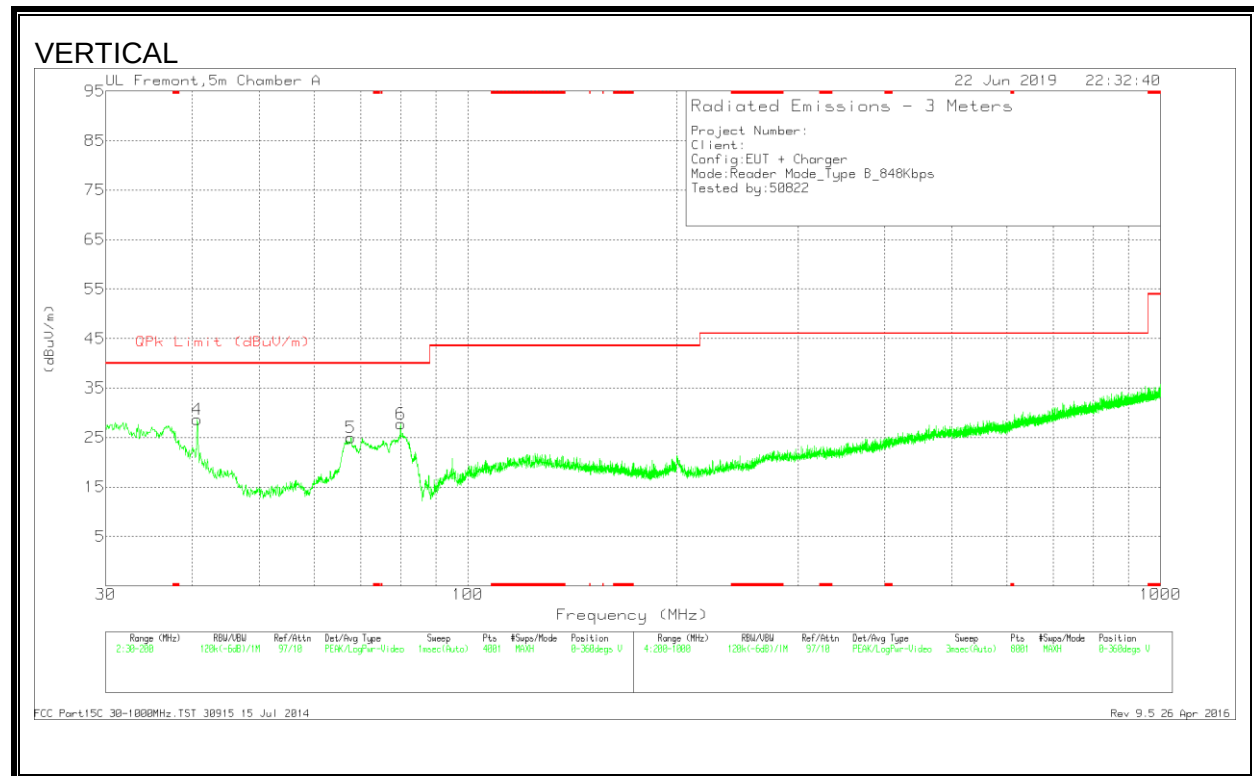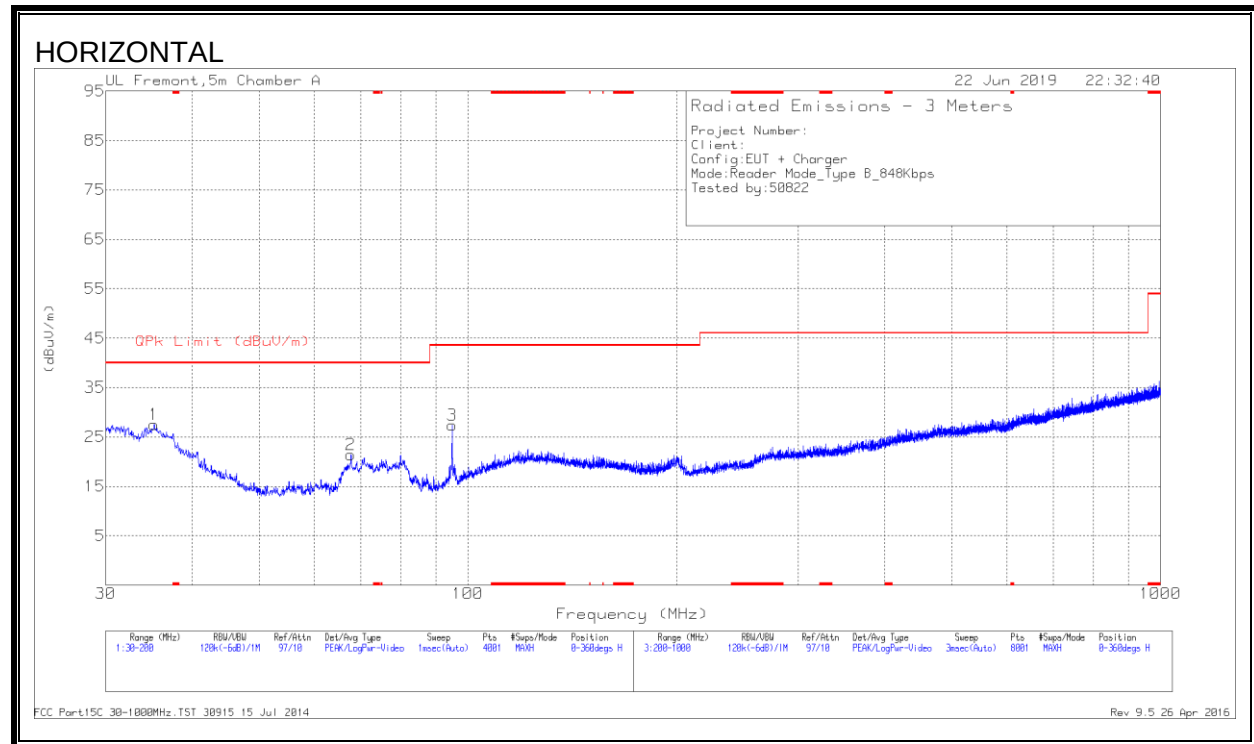

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF PRE0181574 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	35.2275	31.45	Pk	23.3	-27.2	27.55	40	-12.45	0-360	200	H
4	40.6675	36.81	Pk	18.9	-27.1	28.61	40	-11.39	0-360	100	V
2	67.7825	34.16	Pk	13.9	-26.7	21.36	40	-18.64	0-360	400	H
5	67.7825	37.82	Pk	13.9	-26.7	25.02	40	-14.98	0-360	100	V
6	80.0225	40.86	Pk	13.4	-26.5	27.76	40	-12.24	0-360	100	V
3	94.8975	38.92	Pk	14.8	-26.3	27.42	43.52	-16.1	0-360	300	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

FCC Part15C 30-1000MHz.TST 30915 15 Jul 2014

Rev 9.5 26 Apr 2016

9. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

IC RSS-210, Annex B.6

Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).

TEST PROCEDURE

ANSI C63.10-2013 Clause 6.8

RESULTS

No non-compliance noted.

ID:	38602	Date:	6/7/19
-----	-------	-------	--------

9.1. CE MODE

848Kbps

CE MODE TYPE B 848 Kbps

Reference Frequency: EUT Channel 13.56 MHz @ 20°C										
Limit: ± 100 ppm = 1.35600 KHz										
Power Supply	Envir. Temp	Frequency Deviation Measured with Time Elapse								
(VAC)	(°C)	Startup (MHz)	Delta (ppm)	@ 2 mins (MHz)	Delta (ppm)	@ 5 mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.5596470	25.795	13.5597952	14.866	13.5597916	15.131	13.5597892	15.306	± 100
	40	13.5598228	12.832	13.5598184	13.159	13.5598151	13.398	13.5598115	13.668	± 100
	30	13.5598474	11.014	13.5598451	11.191	13.5598424	11.387	13.5598375	11.746	± 100
	20	13.5599968	0.000	13.5598509	10.757	13.5598550	10.457	13.5598592	10.150	± 100
	10	13.5596989	21.970	13.5597087	21.246	13.5597171	20.630	13.5597288	19.762	± 100
	0	13.5597515	18.088	13.5597843	15.671	13.5597576	17.637	13.5597643	17.147	± 100
	-10	13.5599173	10.281	13.5599181	5.804	13.5599085	6.508	13.5599184	5.783	± 100
	-20	13.5600354	-2.845	13.5600575	-4.474	13.5600539	-4.209	13.5600480	-3.776	± 100
3.23	20	13.5597209	20.343	13.5600105	-1.011	13.5600009	-0.303	13.5599666	2.226	± 100
4.37	20	13.5598253	12.649	13.5597761	16.275	13.5597956	14.840	13.5598490	10.896	± 100

9.2. READER MODE

848Kbps

READER MODE TYPE B 848Kbps

Reference Frequency: EUT Channel 13.56 MHz @ 20°C										
Limit: ± 100 ppm = 1.35600 KHz										
Power Supply	Envir. Temp	Frequency Deviation Measured with Time Elapse								
(VAC)	(°C)	Startup (MHz)	Delta (ppm)	@ 2 mins (MHz)	Delta (ppm)	@ 5 mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.5597834	5.461	13.5597827	5.515	13.5597820	5.563	13.5597816	5.593	± 100
	40	13.5598010	4.160	13.5597987	4.334	13.5597961	4.524	13.5597933	4.730	± 100
	30	13.5598281	2.161	13.5598251	2.383	13.5598217	2.634	13.5598180	2.910	± 100
	20	13.5598574	0.000	13.5598544	0.223	13.5598511	0.467	13.5598476	0.722	± 100
	10	13.5598217	2.637	13.5598301	2.018	13.5598399	1.297	13.5598509	0.479	± 100
	0	13.5598792	-1.608	13.5598834	-1.913	13.5598879	-2.245	13.5598926	-2.594	± 100
	-10	13.5599061	-3.589	13.5599086	-3.771	13.5599110	-3.953	13.5599134	-4.126	± 100
	-20	13.5599175	-4.430	13.5599174	-4.422	13.5599168	-4.379	13.5599157	-4.297	± 100
3.23	20	13.5599032	-3.378	13.5598988	-3.054	13.5598934	-2.653	13.5598869	-2.176	± 100
4.37	20	13.5598358	1.598	13.5598316	1.906	13.5598268	2.257	13.5598214	2.657	± 100

10. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

IC RSS-GEN, Section 8.8

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:
1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

TEST PROCEDURE

ANSI C63.10:2013


RESULTS

No non-compliance noted:

10.1. CE MODE

10.1.1. NORMAL OPERATION WITH ANTENNA PORT TERMINATED, 848Kbps

LINE 1 RESULTS

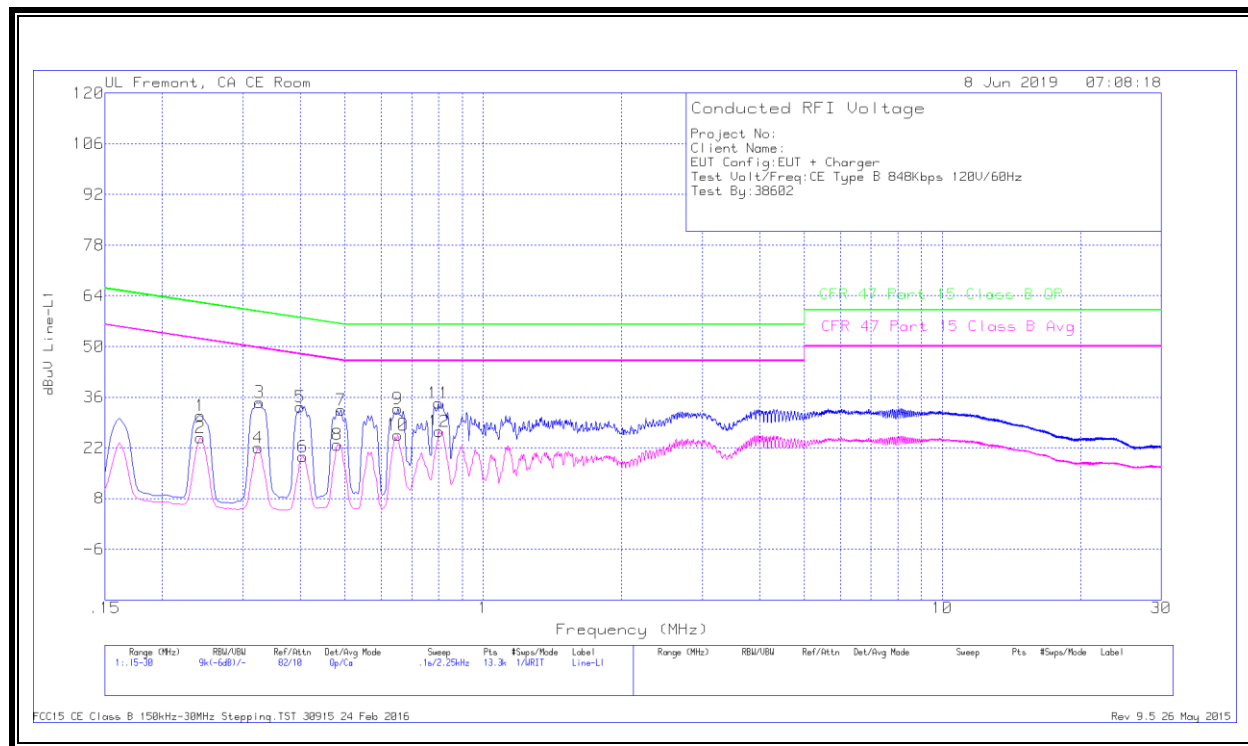


WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.24225	20.78	Qp	0	0	10.1	30.88	62.02	-31.14	-	-
2	.24225	14.72	Ca	0	0	10.1	24.82	-	-	52.02	-27.2
3	.3255	24.51	Qp	0	0	10.1	34.61	59.57	-24.96	-	-
4	.32325	11.93	Ca	0	0	10.1	22.03	-	-	49.62	-27.59
5	.39975	23.26	Qp	0	0	10.1	33.36	57.86	-24.5	-	-
6	.40425	9.42	Ca	0	0	10.1	19.52	-	-	47.77	-28.25
7	.48975	22.27	Qp	0	0	10.1	32.37	56.17	-23.8	-	-
8	.48075	12.7	Ca	0	0	10.1	22.8	-	-	46.33	-23.53
9	.65175	22.67	Qp	0	0	10.1	32.77	56	-23.23	-	-
10	.65175	15.47	Ca	0	0	10.1	25.57	-	-	46	-20.43
11	.80025	24.25	Qp	0	0	10.1	34.35	56	-21.65	-	-
12	.8025	16.51	Ca	0	0	10.1	26.61	-	-	46	-19.39

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

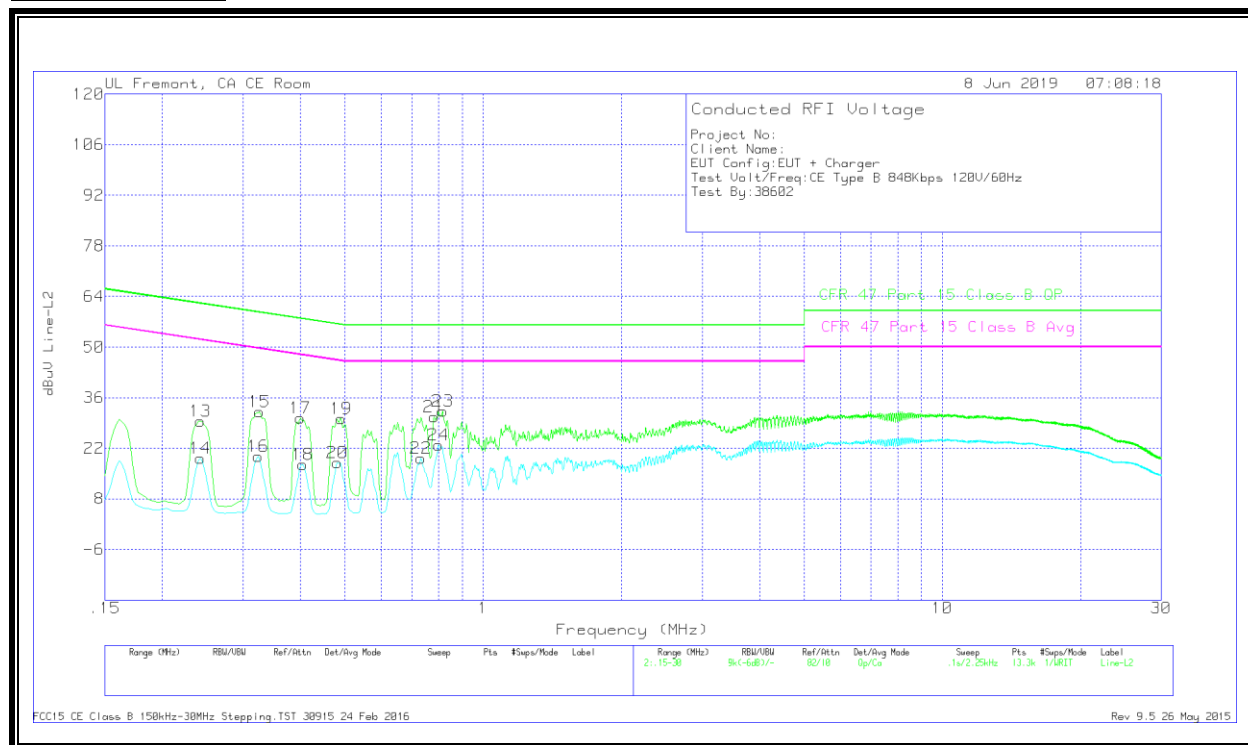

WORST EMISSIONS


Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.24225	19.34	Qp	0	0	10.1	29.44	62.02	-32.58	-	-
14	.24225	9.06	Ca	0	0	10.1	19.16	-	-	52.02	-32.86
15	.3255	21.95	Qp	0	0	10.1	32.05	59.57	-27.52	-	-
16	.32325	9.61	Ca	0	0	10.1	19.71	-	-	49.62	-29.91
17	.39975	20.22	Qp	0	0	10.1	30.32	57.86	-27.54	-	-
18	.40425	7.4	Ca	0	0	10.1	17.5	-	-	47.77	-30.27
19	.48975	20.11	Qp	0	0	10.1	30.21	56.17	-25.96	-	-
20	.48075	7.97	Ca	0	0	10.1	18.07	-	-	46.33	-28.26
21	.78225	20.65	Qp	0	0	10.1	30.75	56	-25.25	-	-
22	.73275	9.08	Ca	0	0	10.1	19.18	-	-	46	-26.82
23	.816	22.23	Qp	0	0	10.1	32.33	56	-23.67	-	-
24	.80025	12.71	Ca	0	0	10.1	22.81	-	-	46	-23.19

Qp - Quasi-Peak detector

Ca - CISPR average detection

10.1.2. NORMAL OPERATION WITHOUT ANTENNA PORT TERMINATED, 848Kbps

LINE 1 RESULTS

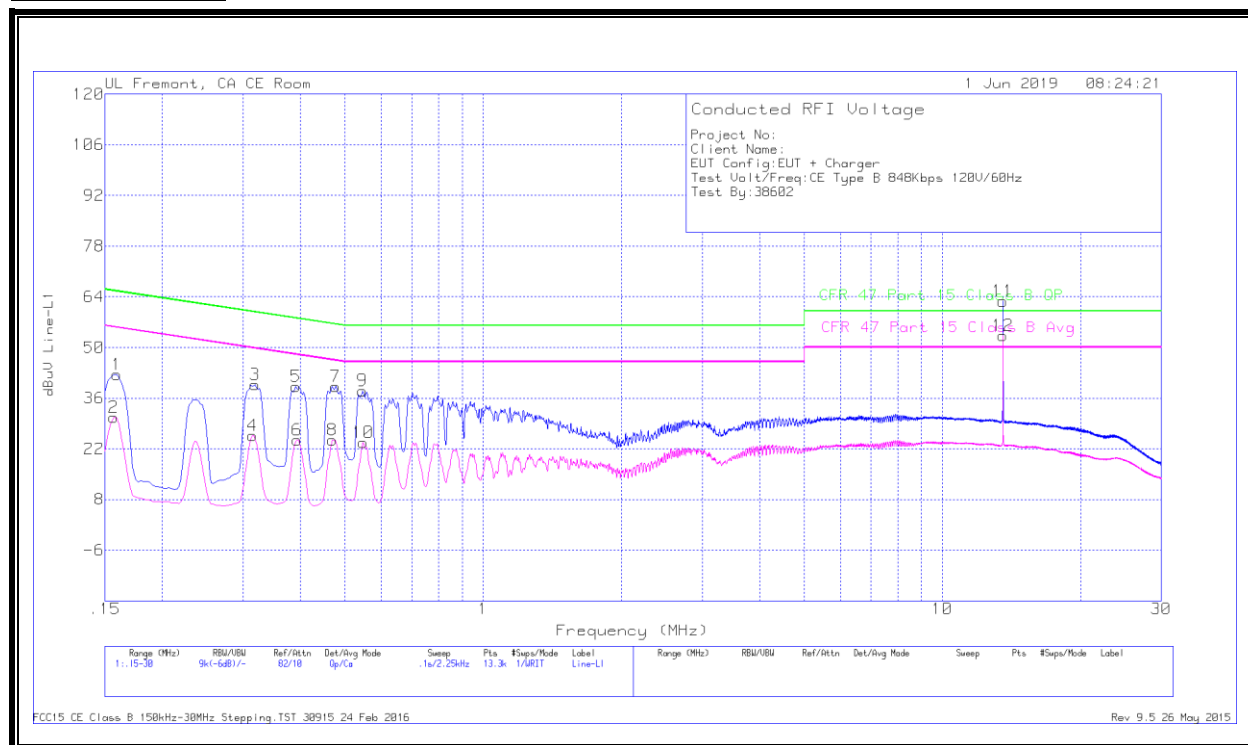

WORST EMISSIONS


Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.159	32.4	Qp	.1	0	10.1	42.6	65.52	-22.92	-	-
2	.15675	20.47	Ca	.1	0	10.1	30.67	-	-	55.63	-24.96
3	.31875	29.58	Qp	0	0	10.1	39.68	59.74	-20.06	-	-
4	.31425	15.56	Ca	0	0	10.1	25.66	-	-	49.86	-24.2
5	.39075	29.12	Qp	0	0	10.1	39.22	58.05	-18.83	-	-
6	.393	14.41	Ca	0	0	10.1	24.51	-	-	48	-23.49
7	.47625	29.1	Qp	0	0	10.1	39.2	56.4	-17.2	-	-
8	.4695	14.31	Ca	0	0	10.1	24.41	-	-	46.52	-22.11
9	.546	27.99	Qp	0	0	10.1	38.09	56	-17.91	-	-
10	.54825	13.59	Ca	0	0	10.1	23.69	-	-	46	-22.31
11	13.56	52.28	Qp	.1	.2	10.2	62.78	60	2.78	-	-
12	13.56	42.87	Ca	.1	.2	10.2	53.37	-	-	50	3.37

Qp - Quasi-Peak detector

Ca - CISPR average detection

Note: 13.56MHz is a fundamental frequency of the EUT. Data documented in above section, indicate that when the antenna terminal is terminated the fundamental amplitude is lowering below the limit line

LINE 2 RESULTS

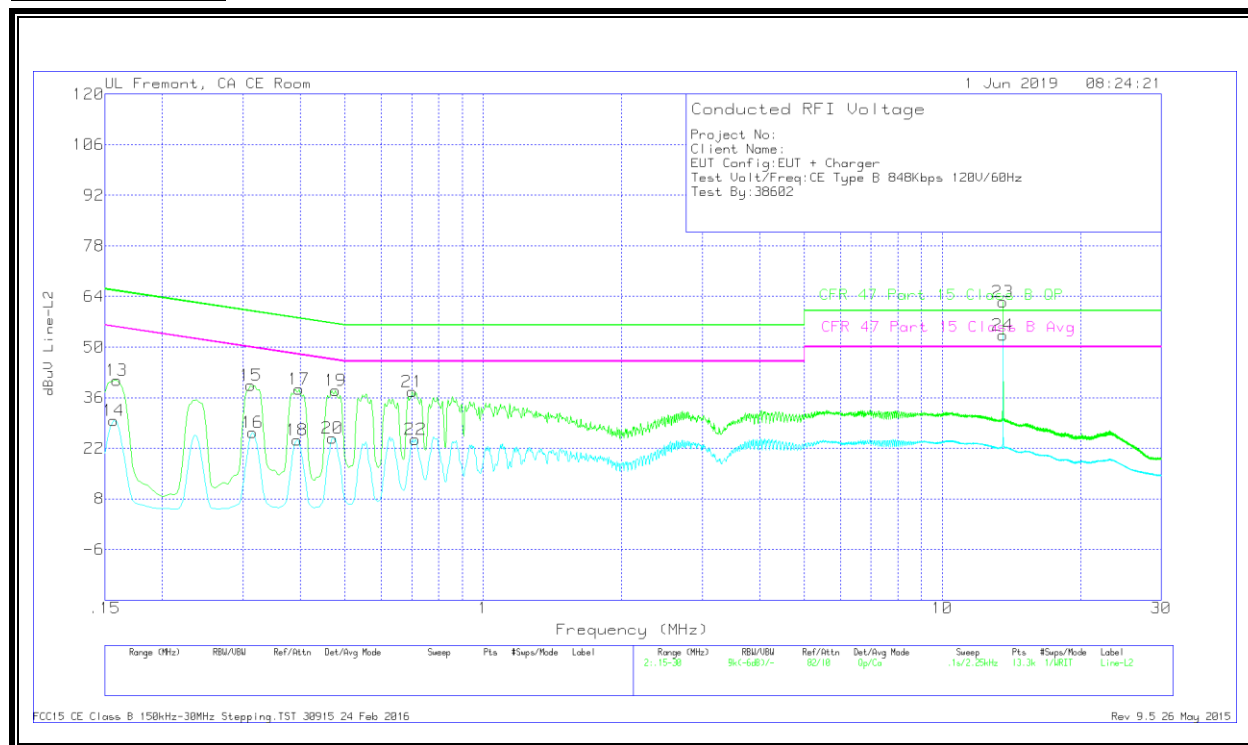

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.159	30.59	Qp	.1	0	10.1	40.79	65.52	-24.73	-	-
14	.15675	19.54	Ca	.1	0	10.1	29.74	-	-	55.63	-25.89
15	.312	29.25	Qp	0	0	10.1	39.35	59.92	-20.57	-	-
16	.31425	16.26	Ca	0	0	10.1	26.36	-	-	49.86	-23.5
17	.3975	28.18	Qp	0	0	10.1	38.28	57.91	-19.63	-	-
18	.393	14.17	Ca	0	0	10.1	24.27	-	-	48	-23.73
19	.47625	27.85	Qp	0	0	10.1	37.95	56.4	-18.45	-	-
20	.4695	14.75	Ca	0	0	10.1	24.85	-	-	46.52	-21.67
21	.70125	27.59	Qp	0	0	10.1	37.69	56	-18.31	-	-
22	.7125	14.37	Ca	0	0	10.1	24.47	-	-	46	-21.53
23	13.56	51.98	Qp	.1	.2	10.2	62.48	60	2.48	-	-
24	13.56	42.77	Ca	.1	.2	10.2	53.27	-	-	50	3.27

Qp - Quasi-Peak detector


Ca - CISPR average detection

Note: 13.56MHz is a fundamental frequency of the EUT. Data documented in above section, indicate that when the antenna terminal is terminated the fundamental amplitude is lowering below the limit line

10.2. READER MODE

10.2.1. NORMAL OPERATION WITH ANTENNA PORT TERMINATED, 848Kbps

LINE 1 RESULTS

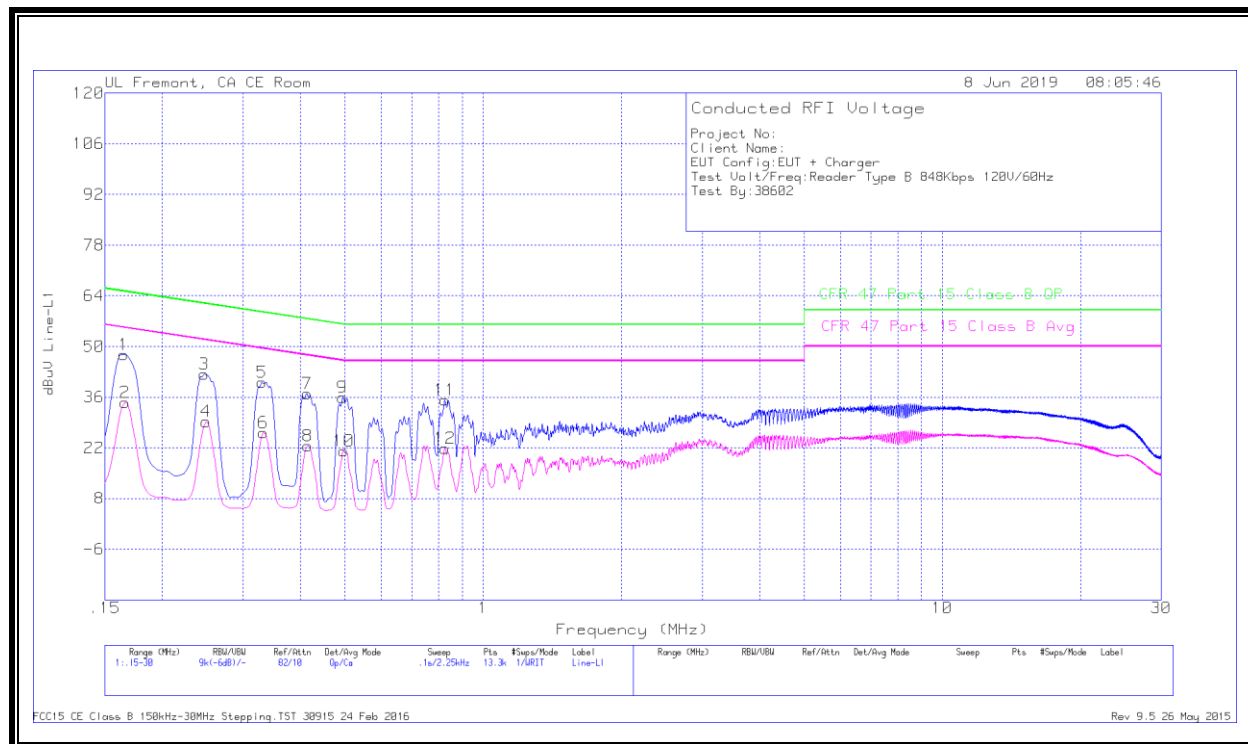


WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.16463	37.56	Qp	.1	0	10.1	47.76	65.23	-17.47	-	-
2	.16575	24.31	Ca	.1	0	10.1	34.51	-	-	55.17	-20.66
3	.24675	32.18	Qp	0	0	10.1	42.28	61.87	-19.59	-	-
4	.249	19.13	Ca	0	0	10.1	29.23	-	-	51.79	-22.56
5	.33	30.07	Qp	0	0	10.1	40.17	59.45	-19.28	-	-
6	.33225	16.16	Ca	0	0	10.1	26.26	-	-	49.39	-23.13
7	.41325	26.85	Qp	0	0	10.1	36.95	57.58	-20.63	-	-
8	.4155	12.51	Ca	0	0	10.1	22.61	-	-	47.54	-24.93
9	.49425	25.78	Qp	0	0	10.1	35.88	56.1	-20.22	-	-
10	.4965	11.01	Ca	0	0	10.1	21.11	-	-	46.06	-24.95
11	.825	25.11	Qp	0	0	10.1	35.21	56	-20.79	-	-
12	.825	11.76	Ca	0	0	10.1	21.86	-	-	46	-24.14

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

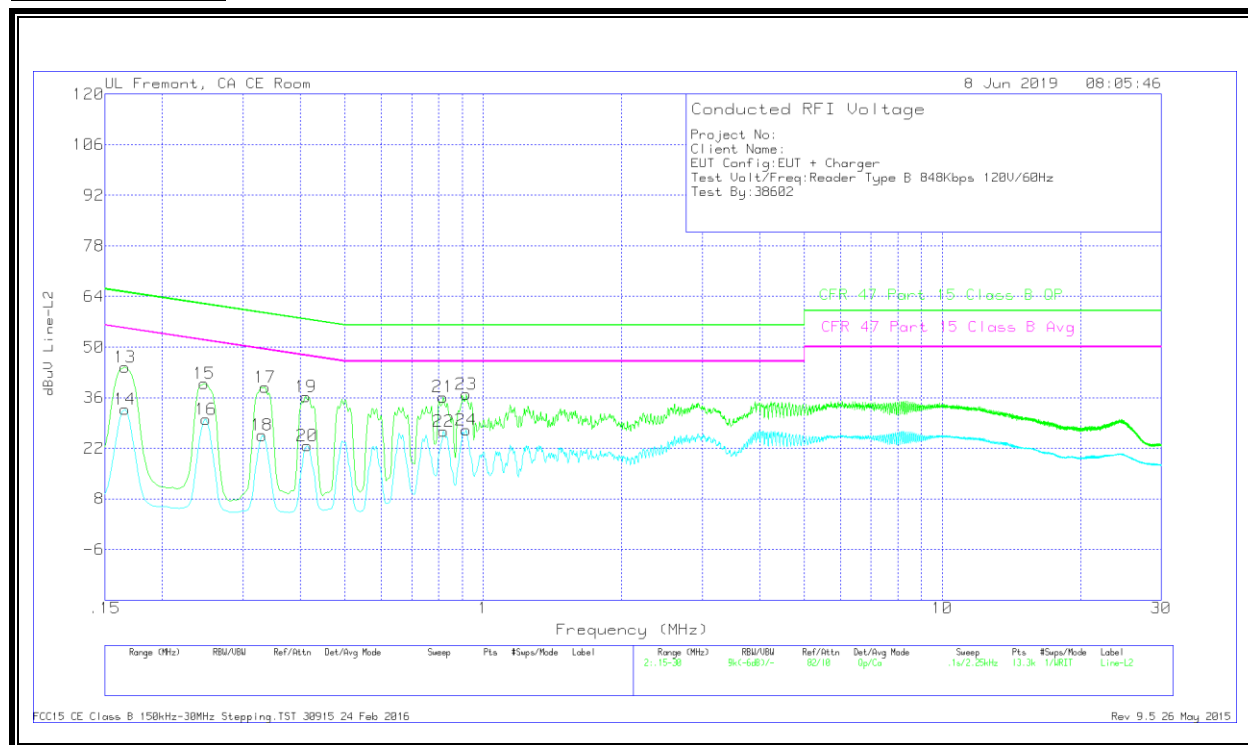

WORST EMISSIONS


Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.16575	34.27	Qp	.1	0	10.1	44.47	65.17	-20.7	-	-
14	.16575	22.6	Ca	.1	0	10.1	32.8	-	-	55.17	-22.37
15	.24675	29.79	Qp	0	0	10.1	39.89	61.87	-21.98	-	-
16	.249	19.85	Ca	0	0	10.1	29.95	-	-	51.79	-21.84
17	.3345	28.82	Qp	0	0	10.1	38.92	59.34	-20.42	-	-
18	.33	15.48	Ca	0	0	10.1	25.58	-	-	49.45	-23.87
19	.411	26.09	Qp	0	0	10.1	36.19	57.63	-21.44	-	-
20	.41325	12.56	Ca	0	0	10.1	22.66	-	-	47.58	-24.92
21	.81825	26.08	Qp	0	0	10.1	36.18	56	-19.82	-	-
22	.8205	16.57	Ca	0	0	10.1	26.67	-	-	46	-19.33
23	.9195	26.74	Qp	0	.1	10.1	36.94	56	-19.06	-	-
24	.91837	16.82	Ca	0	.1	10.1	27.02	-	-	46	-18.98

Qp - Quasi-Peak detector

Ca - CISPR average detection

10.2.2. NORMAL OPERATION WITHOUT ANTENNA PORT TERMINATED, 848Kbps

LINE 1 RESULTS

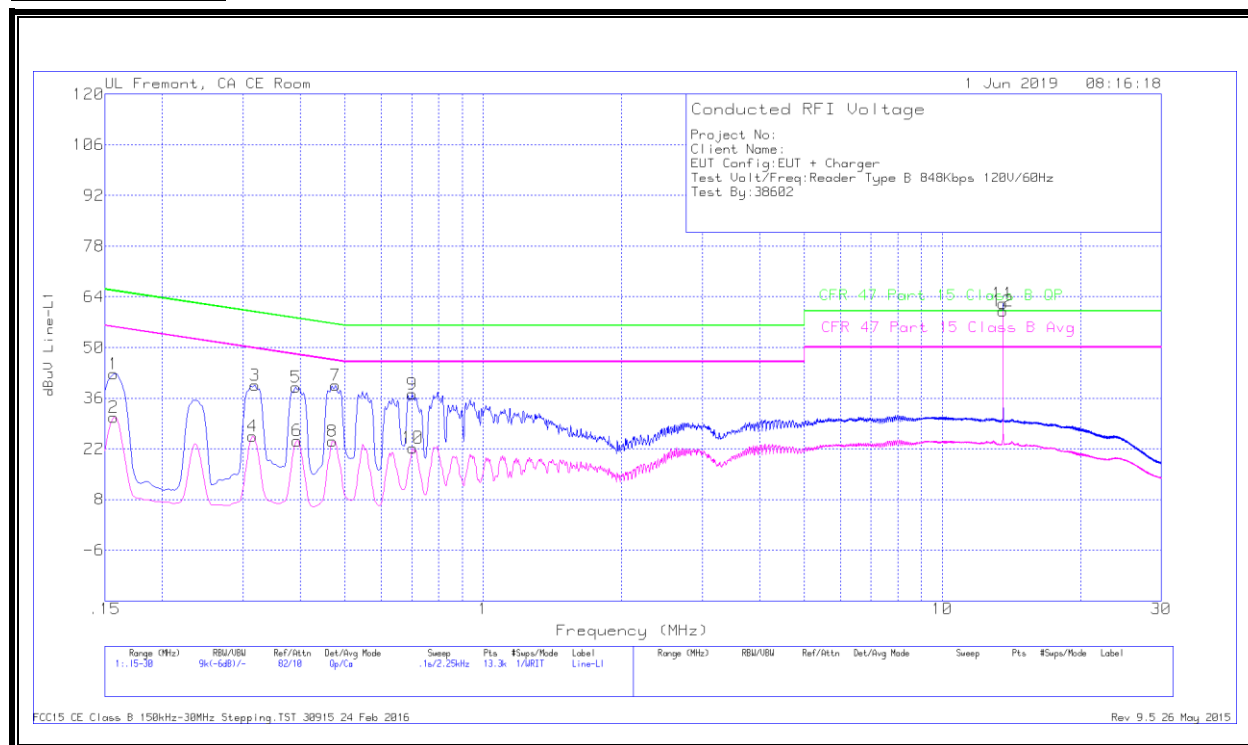

WORST EMISSIONS


Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.15675	32.44	Qp	.1	0	10.1	42.64	65.63	-22.99	-	-
2	.15675	20.51	Ca	.1	0	10.1	30.71	-	-	55.63	-24.92
3	.31875	29.42	Qp	0	0	10.1	39.52	59.74	-20.22	-	-
4	.31425	15.41	Ca	0	0	10.1	25.51	-	-	49.86	-24.35
5	.39075	28.92	Qp	0	0	10.1	39.02	58.05	-19.03	-	-
6	.393	14.09	Ca	0	0	10.1	24.19	-	-	48	-23.81
7	.47625	29.46	Qp	0	0	10.1	39.56	56.4	-16.84	-	-
8	.4695	13.96	Ca	0	0	10.1	24.06	-	-	46.52	-22.46
9	.70125	27.08	Qp	0	0	10.1	37.18	56	-18.82	-	-
10	.7035	12.17	Ca	0	0	10.1	22.27	-	-	46	-23.73
11	13.56	51.62	Qp	.1	.2	10.2	62.12	60	2.12	-	-
12	13.56	49.63	Ca	.1	.2	10.2	60.13	-	-	50	10.13

Qp - Quasi-Peak detector

Ca - CISPR average detection

Note: 13.56MHz is a fundamental frequency of the EUT. Data documented in above section, indicate that when the antenna terminal is terminated the fundamental amplitude is lowering below the limit line

LINE 2 RESULTS

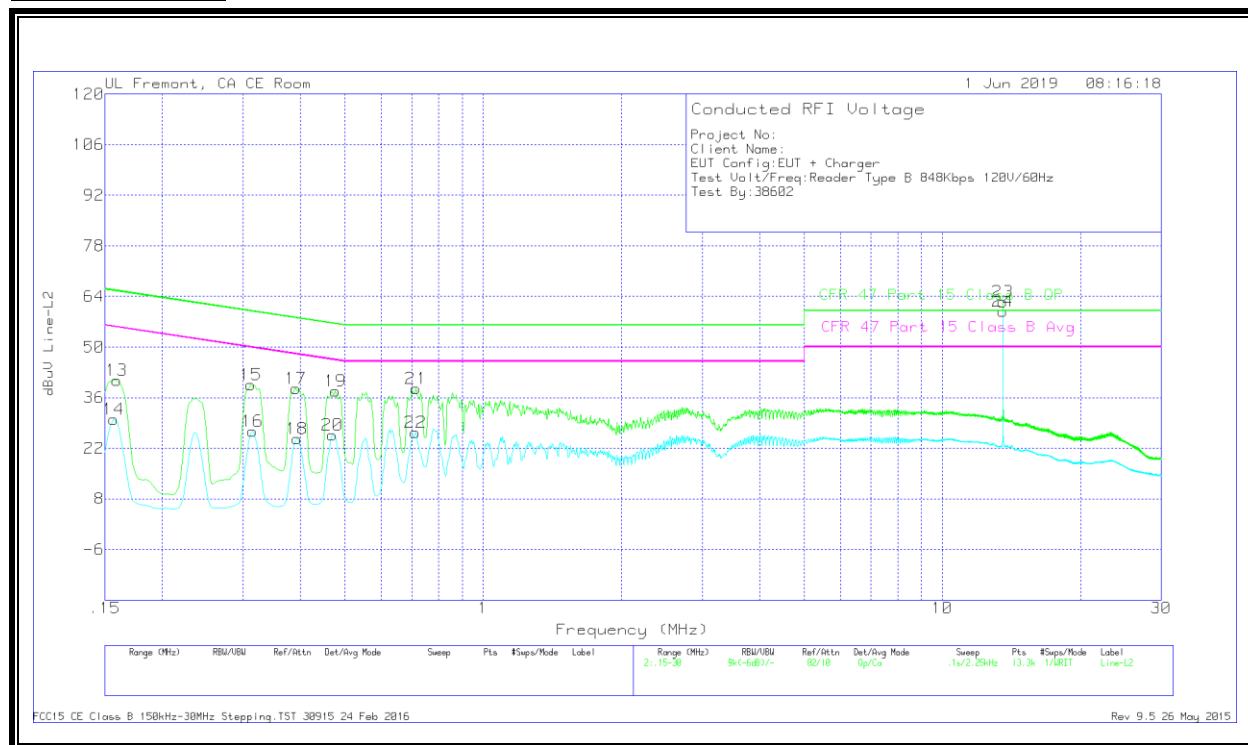

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.159	30.65	Qp	.1	0	10.1	40.85	65.52	-24.67	-	-
14	.15675	19.81	Ca	.1	0	10.1	30.01	-	-	55.63	-25.62
15	.312	29.44	Qp	0	0	10.1	39.54	59.92	-20.38	-	-
16	.31425	16.68	Ca	0	0	10.1	26.78	-	-	49.86	-23.08
17	.39075	28.47	Qp	0	0	10.1	38.57	58.05	-19.48	-	-
18	.393	14.51	Ca	0	0	10.1	24.61	-	-	48	-23.39
19	.47625	27.78	Qp	0	0	10.1	37.88	56.4	-18.52	-	-
20	.4695	15.5	Ca	0	0	10.1	25.6	-	-	46.52	-20.92
21	.71475	28.48	Qp	0	0	10.1	38.58	56	-17.42	-	-
22	.7125	16.18	Ca	0	0	10.1	26.28	-	-	46	-19.72
23	13.56	51.96	Qp	.1	.2	10.2	62.46	60	2.46	-	-
24	13.56	49.41	Ca	.1	.2	10.2	59.91	-	-	50	9.91

Qp - Quasi-Peak detector

Ca - CISPR average detection

Note: 13.56MHz is a fundamental frequency of the EUT. Data documented in above section, indicate that when the antenna terminal is terminated the fundamental amplitude is lowering below the limit line

END OF REPORT

11. SETUP PHOTOS

Please refer to 12943451-EP1V1 for setup photos