



## HAC T-COIL SIGNAL TEST REPORT

**FCC 47 CFR § 20.19  
ANSI C63.19-2011**

*For*  
**FCC ID: BCG-E3309A**  
**Model Name: A2111, A2222, and A2223**

**Report Number: 12696946-S3V4**  
**Issue Date: 8/12/2019**

*Prepared for*  
**APPLE INC.**  
**1 APPLE PARK WAY**  
**CUPERTINO, CA 95014-2084**

*Prepared by*  
**UL VERIFICATION SERVICES INC.**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 319-4000**  
**FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

**Revision History**

| Rev. | Date      | Revisions                                                                                  | Revised By      |
|------|-----------|--------------------------------------------------------------------------------------------|-----------------|
| V1   | 7/23/2019 | Initial Issue                                                                              | --              |
| V2   | 8/5/2019  | Updated Report in accordance with TCB Feedback:<br>Sections 5/6/9/10<br>Appendices B and C | Coltyce Sanders |
| V3   | 8/6/2019  | Section 9.3: Removed 256QAM                                                                | Coltyce Sanders |
| V4   | 8/12/2019 | Updated based on reviewer comments                                                         | Nathan Sousa    |
|      |           |                                                                                            |                 |

## Table of Contents

|                                                                           |           |
|---------------------------------------------------------------------------|-----------|
| <b>1. Attestation of Test Results.....</b>                                | <b>5</b>  |
| <b>2. Test Methodology .....</b>                                          | <b>6</b>  |
| <b>3. Facilities and Accreditation .....</b>                              | <b>6</b>  |
| <b>4. Calibration and Uncertainty .....</b>                               | <b>6</b>  |
| 4.1. Measuring Instrument Calibration .....                               | 6         |
| 4.2. Measurement Uncertainty.....                                         | 7         |
| <b>5. Test Procedures for all Technologies .....</b>                      | <b>8</b>  |
| 5.1. General Procedures C63.19-2011, Section 7.....                       | 8         |
| 5.2. VoWiFi – For PAG REUSE .....                                         | 9         |
| 5.3. Over the Top (OTT) – For PAG REUSE.....                              | 10        |
| <b>6. Audio Level and Gain Measurements.....</b>                          | <b>12</b> |
| 6.1. GSM/W-CDMA and VoLTE.....                                            | 12        |
| 6.2. CDMA (1xRTT).....                                                    | 12        |
| 6.3. VoWi-Fi.....                                                         | 12        |
| 6.4. Over the Top (OTT) – For PAG REUSE.....                              | 13        |
| <b>7. T-coil Measurement Criteria .....</b>                               | <b>14</b> |
| 7.1. Frequency Response.....                                              | 14        |
| 7.2. Signal to Noise.....                                                 | 15        |
| <b>8. Device Under Test.....</b>                                          | <b>16</b> |
| 8.1. Air Interfaces and Operating Mode .....                              | 16        |
| <b>9. Investigations (Antenna, Codec, &amp; Air Interface) .....</b>      | <b>17</b> |
| 9.1. Antenna Investigation .....                                          | 17        |
| 9.1.1. Standard Phone Application.....                                    | 17        |
| 9.1.2. OTT Application .....                                              | 18        |
| 9.2. Standard Phone Application Codec Bit-rate Investigation .....        | 19        |
| 9.3. Standard Phone Application Air Interface Investigation .....         | 20        |
| 9.4. Standard Phone Application VoWi-Fi Codec Investigation .....         | 23        |
| 9.5. Standard Phone Application VoWi-Fi Air Interface Investigation ..... | 24        |
| 9.6. OTT Codec Investigation .....                                        | 26        |
| 9.7. OTT Air Interface Investigation.....                                 | 27        |
| <b>10. HAC (T-coil) Test Results .....</b>                                | <b>28</b> |
| 10.1. Standard Phone Application .....                                    | 28        |
| 10.2. OTT Application .....                                               | 30        |
| 10.3. Worst Case T-Coil Test Plot.....                                    | 31        |
| <b>Appendix .....</b>                                                     | <b>32</b> |
| Appendix A: T-Coil Setup Photo .....                                      | 32        |

*Appendix B: T-Coil Test Plots..... 32*

*Appendix C: T-Coil Test Plots (OTT) ..... 32*

*Appendix D: T-Coil Probe Certificates ..... 32*

*Appendix E: Adjusted Gain Procedure ..... 32*

## 1. Attestation of Test Results

|                          |                                                                                                                                          |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant Name           | APPLE, INC.                                                                                                                              |
| FCC ID                   | BCG-E3309A                                                                                                                               |
| Model Name               | A2111, A2222, and A2223                                                                                                                  |
| Difference in Model Name | Model A2222, A2223 is electrically identical to Model A2111. Three model numbers are allocated for marketing and logistic purposes only. |
| Applicable Standards     | FCC 47 CFR § 20.19<br>ANSI C63.19-2011                                                                                                   |
| HAC Rating               | T4                                                                                                                                       |
| Date Tested              | 5/6/2019 to 6/20/2019 and 7/29/2019 to 7/31/2019                                                                                         |
| Test Results             | Pass                                                                                                                                     |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

|                                                                                                                |                                                                                                      |
|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Approved & Released By:<br> | Prepared By:<br> |
| Devin Chang<br>Senior Test Engineer<br>UL Verification Services Inc.                                           | Nathan Sousa<br>Senior Test Engineer<br>UL Verification Services Inc.                                |

## 2. Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.19-2011 Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids and FCC published procedure

KDB 285076 D01 HAC Guidance v05

KDB 285076 D02 T-Coil testing for CMRS IP v03

KDB 285076 D03 HAC FAQ v01

TCB workshop updates

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at:

|                      |
|----------------------|
| 47266 Benicia Street |
| SAR Lab 8            |

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

## 4. Calibration and Uncertainty

### 4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations and is traceable to recognized national standards.

| Name of Equipment            | Manufacturer  | Type/Model | Serial No.    | Cal. Due Date |
|------------------------------|---------------|------------|---------------|---------------|
| ABM Probe                    | SPEAG         | AM1DV3     | 3083          | 1/15/2020     |
| Data Acquisition Electronics | SPEAG         | DAE4       | 1540          | 2/18/2020     |
| DAC                          | Sound Devices | USBPre 2   | HB11173410003 | N/A           |
| Radio Communication Tester   | R & S         | CMW 500    | 125236        | 04/10/2020    |

## 4.2. Measurement Uncertainty

### Measurement Uncertainty for Audio Band Magnetic Measurement

| Error Description                                     | Uncertainty values (±%) | Probe Dist. | Div. | c <sub>i</sub> ABM1 | c <sub>i</sub> ABM2 | Std. Unc. |           |
|-------------------------------------------------------|-------------------------|-------------|------|---------------------|---------------------|-----------|-----------|
|                                                       |                         |             |      |                     |                     | ABM1 (±%) | ABM2 (±%) |
| <b>Probe Sensitivity</b>                              |                         |             |      |                     |                     |           |           |
| Reference level                                       | 3.0                     | N           | 1    | 1                   | 1                   | 3.0       | 3.0       |
| AMCC geometry                                         | 0.4                     | R           | √3   | 1                   | 1                   | 0.2       | 0.2       |
| AMCC current                                          | 1.0                     | R           | √3   | 1                   | 1                   | 0.6       | 0.6       |
| Probe positioning during calibration                  | 0.1                     | R           | √3   | 1                   | 1                   | 0.1       | 0.1       |
| Noise contribution                                    | 0.7                     | R           | √3   | 0.0143              | 1                   | 0.0       | 0.4       |
| Frequency slope                                       | 5.9                     | R           | √3   | 0.1                 | 1.00                | 0.3       | 3.5       |
| <b>Probe System</b>                                   |                         |             |      |                     |                     |           |           |
| Repeatability / drift                                 | 1.0                     | R           | √3   | 1                   | 1                   | 0.6       | 0.6       |
| Linearity / Dynamic range                             | 0.6                     | R           | √3   | 1                   | 1                   | 0.4       | 0.4       |
| Acoustic noise                                        | 1.0                     | R           | √3   | 0.1                 | 1                   | 0.1       | 0.6       |
| Probe angle                                           | 2.3                     | R           | √3   | 1                   | 1                   | 1.4       | 1.4       |
| Spectral processing                                   | 0.9                     | R           | √3   | 1                   | 1                   | 0.5       | 0.5       |
| Integration time                                      | 0.6                     | N           | 1    | 1                   | 5                   | 0.6       | 3.0       |
| Field disturbance                                     | 0.2                     | R           | √3   | 1                   | 1                   | 0.1       | 0.1       |
| <b>Test Signal</b>                                    |                         |             |      |                     |                     |           |           |
| Reference signal spectral response                    | 0.6                     | R           | √3   | 0                   | 1                   | 0.0       | 0.4       |
| <b>Positioning</b>                                    |                         |             |      |                     |                     |           |           |
| Probe positioning                                     | 1.9                     | R           | √3   | 1                   | 1                   | 1.1       | 1.1       |
| Phantom positioning                                   | 0.9                     | R           | √3   | 1                   | 1                   | 0.5       | 0.5       |
| EUT positioning                                       | 1.9                     | R           | √3   | 1                   | 1                   | 1.1       | 1.1       |
| <b>External Contributions</b>                         |                         |             |      |                     |                     |           |           |
| RF interference                                       | 0.0                     | R           | √3   | 1                   | 0.3                 | 0.0       | 0.0       |
| Test signal variation                                 | 2.0                     | R           | √3   | 1                   | 1                   | 1.2       | 1.2       |
| <b>Combined Std. Uncertainty (ABM field)</b>          |                         |             |      |                     |                     | 4.1       | 6.1       |
| <b>Expanded Std. Uncertainty (%)</b>                  |                         |             |      |                     |                     | 8.1       | 12.3      |
| Notes for table                                       |                         |             |      |                     |                     |           |           |
| 1. N - Nomal                                          |                         |             |      |                     |                     |           |           |
| 2. R - Rectangular                                    |                         |             |      |                     |                     |           |           |
| 3. Div. - Divisor used to obtain standard uncertainty |                         |             |      |                     |                     |           |           |

## 5. Test Procedures for all Technologies

### 5.1. General Procedures C63.19-2011, Section 7

#### ANSI C63.19-2011, Section 7

This document describes the procedures used to measure the ABM (T-Coil) performance of the WD. In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for all measurement positions. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.

Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load may be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there may still be RF leakage from the WD, which may interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 7.1. If the device display can be turned off during a phone call then that may be done during the measurement as well.

Measurements shall be performed at two locations specified in A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal (ABM1) that is useful to a hearing aid T-Coil. The undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage. The flow chart in Figure 7.3 illustrates this three-stage, two orientation process.

The following steps summarize the basic test flow for determining ABM1<sup>1</sup> and ABM2<sup>2</sup>. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.

- a. A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil. Measure the emissions and confirm that they are within the specified tolerance.
- b. Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load as shown in Figure 7.1 or Figure 7.2. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in 7.3.1.
- c. The drive level to the WD is set such that the reference input level specified in Table 7.1 is input to the base station simulator (or manufacturer's test mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at  $f = 1$  kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used.<sup>46</sup> The same drive level will be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- d. Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in 7.4.4.1.1 and 7.4.4.2.

---

<sup>1</sup> **Audio Band Magnetic signal - desired (ABM1):** Measured quantity of the desired magnetic signal

<sup>2</sup> **Audio Band Magnetic signal - undesired (ABM2):** Measured quantity of the undesired magnetic signal, such as interference from battery current and similar non-signal elements.


- e. At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at  $f_i$ ) as described in 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency ( $f_i$ ) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band.

Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input–output comparison using simulated speech. The full-band integrated or half-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)

All measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in 7.3.1.

- f. At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).
- g. Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on Table 8.5.

Test Setup Diagram

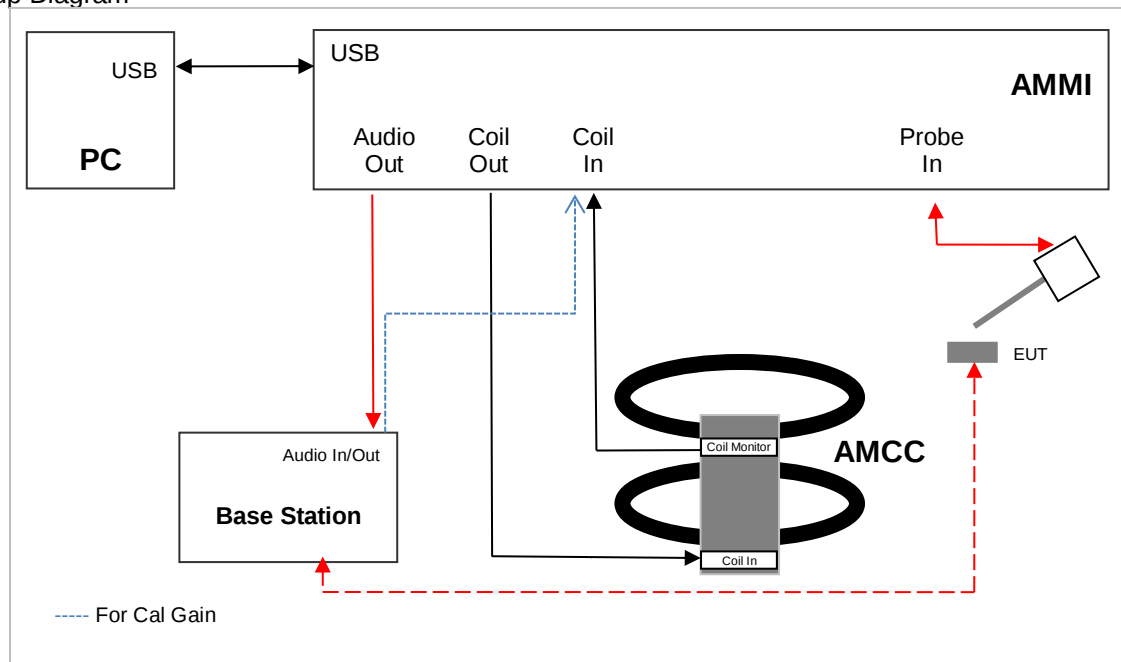

## 5.2. VoWiFi – For PAG REUSE

This device supports Wi-Fi calling (aka Voice over Wi-Fi or VoWiFi) which is an extended feature of the carriers CMRS service to offload VoLTE calls onto local area networks over WI-FI via the Internet and subject to HAC assessment for phones with a HAC rating. HAC assessment for this feature is subject to Pre Approval Guidance.


The set up for VoWiFi uses the base station as described in §5.1 with the exception that the reference audio level is set to -20dBm0. The reference level is calibrated using the standard call box calibration procedures with the exception of the -20dBm0 reference level being used (refer to §6).

An investigation was performed to determine worst case codec, bit rate, and air interface configuration (refer to §9).

### 5.3. Over the Top (OTT) – For PAG REUSE

This device supports VoIP via a preinstalled application that uses the FaceTime service, using **ACC-ELD** as its only codec (refer to §8.1 for air interface details and §9.6 for codec bit rates). VoIP capabilities require HAC assessment when voice calls are supported over the cellular data connection via pre-installed VoIP applications and the assessment is subject to Pre-Approval Guidance procedures.


The equipment is set up as shown below with a support device used to originate the call using the IP transport. The support device<sup>3</sup> connects to the cloud-based FaceTime service via Wi-Fi access point and router, or RJ45. The DUT connects to the VoIP service via a cellular/unlicensed air interface to the call box and an Ethernet connection from call box to Internet. The various codec bit rate and air interface configurations are evaluated to determine the worst-case configuration (refer to §9.6).

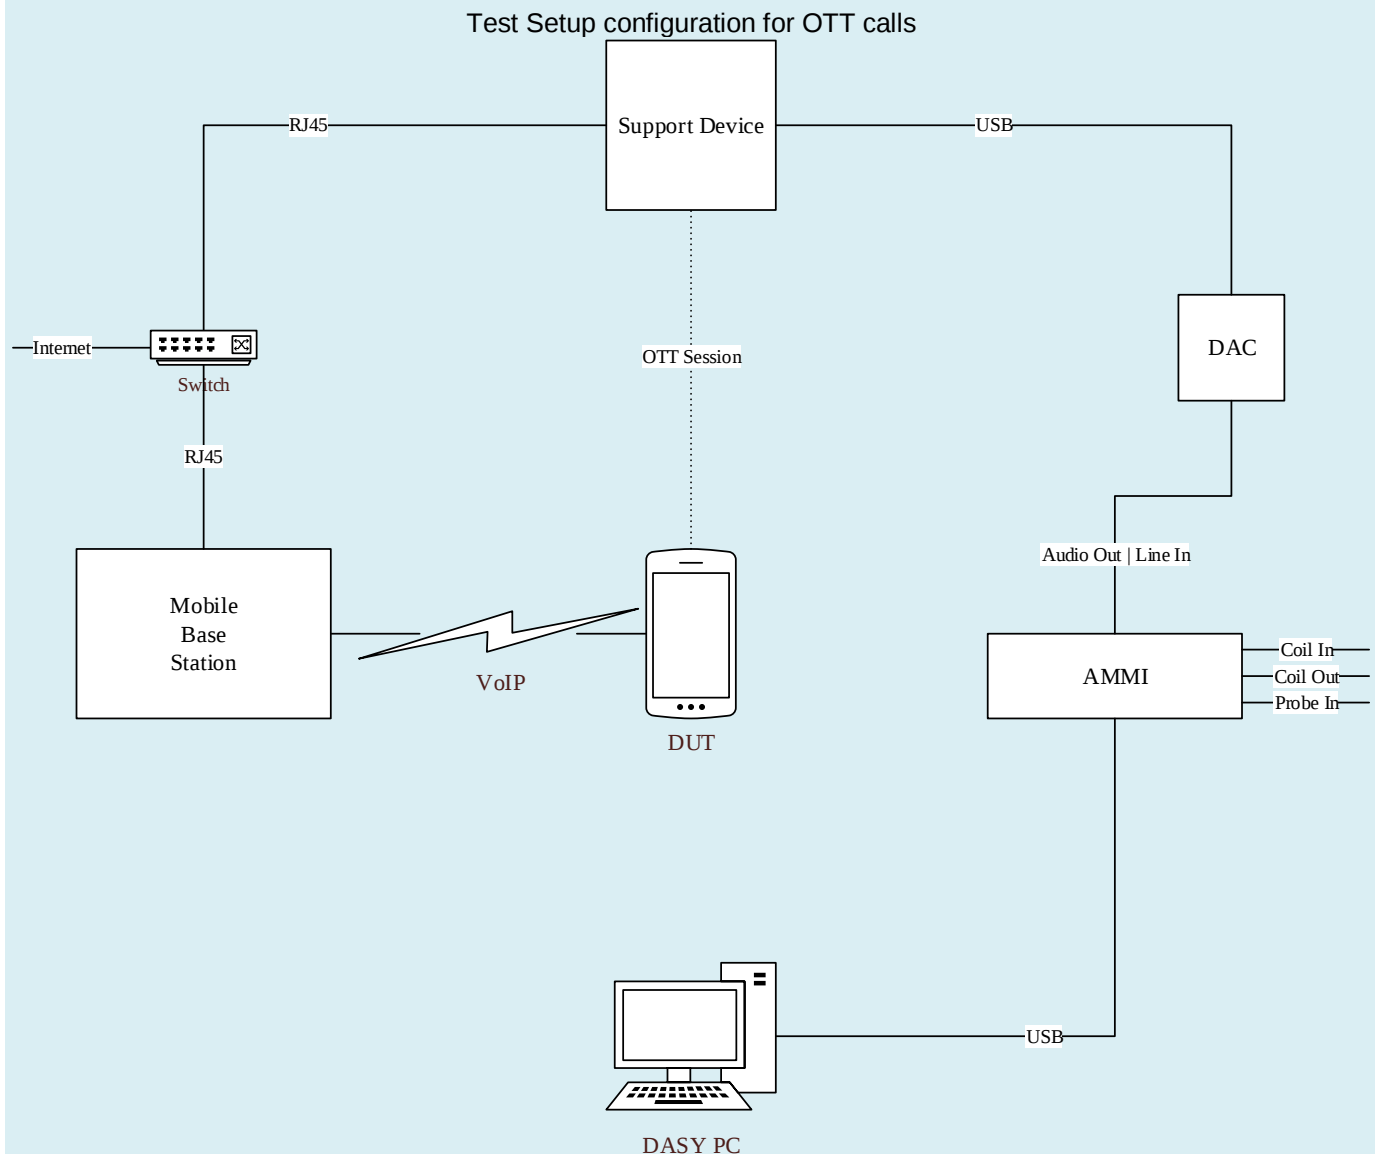

For the OTT call, the calibrated audio card within the CMW500 cannot be used so the AMMI is connected to an external Digital-Analog Converter (DAC) and the DAC is connected to the Support Device via USB. The test signal is sent from the DASY PC to the AMMI, from the AMMI to the DAC, from the DAC to the Support Device, and, via the VoIP call, to the DUT.

<sup>3</sup> The support device is an iMac.

As this test set up uses an external DAC between the AMMI's audio output and support device, the appropriate gain factor for the OTT call needs to be determined. This is done by connecting the DAC between the AMMI Audio output and Coil input as shown below.

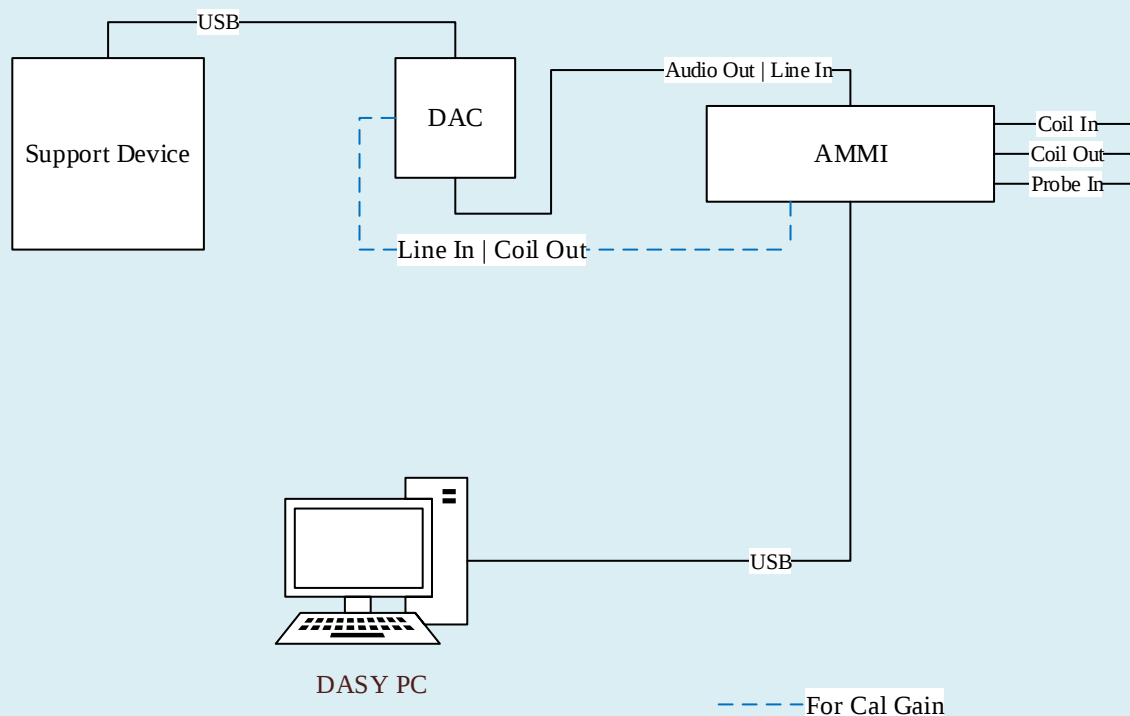

Using the metering function on the DAC, the DAC gain is adjusted until the volume reaches 0 dBFS (3.14 dBm0 based on TIA/EIA 810-A). SPEAG's "TN-LK-05042018-C-T-Coil\_Levels" document (Appendix E) steps E through H are then followed to determine the adjusted gain values as detailed in §6 so that the reference level is set to 23.14dB below full scale, i.e. at -20dBm0. A verification of the DAC's output is performed prior to testing.

## 6. Audio Level and Gain Measurements

The adjusted gain was calculated using Speag's *TN-LK-05042018-D-T-Coil Levels* document (please refer to Appendix E). First, the output of AMMI is determined in a closed loop, then, using the CMW500's input sensitivity, the adjusted gain required for testing can then be calculated. The adjusted linear gain used within this report is as follows:

### 6.1. GSM/W-CDMA and VoLTE

| Signal type    | Audio level<br>[dBm0] | Gain<br>[dB] | Gain<br>(linear) |
|----------------|-----------------------|--------------|------------------|
| 1 kHz sine     | -16.00                | 14.89        | 5.55             |
| Voice 1 kHz    | -16.00                | 27.62        | 24.04            |
| Voice 300-3kHz | -16.00                | 33.47        | 47.15            |

The following software/firmware was used to simulate the VoLTE server for testing:

| Firmware          | License Keys | Software Name         |
|-------------------|--------------|-----------------------|
| V3.7.60 for LTE   | KS500        | LTE FDD R8 SIG BASIC  |
|                   | KS550        | LTE TDD R8 SIG BASIC  |
| V3.7.20 for Audio | KA100        | IP APPL ENABLING IPv4 |
|                   | KA150        | IP APPL ENABLING IPv6 |
|                   | KAA20        | IP APPL IMS BASIC     |
|                   | KM050        | DATA APPL MEAS        |
|                   | KS104        | EVS SPEECH CODEC      |

### 6.2. CDMA (1xRTT)

| Signal type    | Audio level<br>[dBm0] | Gain<br>[dB] | Gain<br>(linear) |
|----------------|-----------------------|--------------|------------------|
| 1 kHz sine     | -18.00                | 12.89        | 4.41             |
| Voice 1 kHz    | -18.00                | 25.62        | 19.10            |
| Voice 300-3kHz | -18.00                | 31.47        | 37.45            |

### 6.3. VoWi-Fi – For PAG REUSE

| Signal type    | Audio level<br>[dBm0] | Gain<br>[dB] | Gain<br>(linear) |
|----------------|-----------------------|--------------|------------------|
| 1 kHz sine     | -20.00                | 10.89        | 3.50             |
| Voice 1 kHz    | -20.00                | 23.62        | 15.17            |
| Voice 300-3kHz | -20.00                | 29.47        | 29.75            |

| Firmware          | License Keys | Software Name         |
|-------------------|--------------|-----------------------|
| V3.7.40 for WLAN  | KS650        | WLAN A/B/G SIG BASIC  |
|                   | KS651        | WLAN N SIG BASIC      |
|                   | KS656        | WLAN IEEE 802.11ac    |
|                   | KS657        | WLAN IEEE 802.11ax    |
| V3.7.20 for Audio | KA100        | IP APPL ENABLING IPv4 |
|                   | KA150        | IP APPL ENABLING IPv6 |
|                   | KAA20        | IP APPL IMS BASIC     |
|                   | KM050        | DATA APPL MEAS        |
|                   | KS104        | EVS SPEECH CODEC      |

#### 6.4. Over the Top (OTT) – For PAG REUSE

For EDGE, HSPA, Ev-Do, LTE, and Wi-Fi, the linear gain levels are listed below were used. The results below are based on a reference input level of -20 dBm0. Granted, the C63.19-2011 interpretation for T-coil audio levels for LTE states that an input reference level of -16 dBm0 should be used, we, the test lab, opted for -20 dBm0 for LTE due to it being a more conservative input reference level.

To calibrate the DAC (refer §5.3), three .wav audio files (sine wave, 1 kHz voice, and 300 to 3 kHz voice) are sent from the DASY5 PC to the AMMI, then to the DAC. The Helmholtz resonator measures the field strength, which represents the AMMI to DAC input sensitivity. After determining the input sensitivity, the adjusted linear gain values can then be calculated.


| Signal type    | Audio level<br>[dBm0] | Gain<br>[dB] | Gain<br>(linear) |
|----------------|-----------------------|--------------|------------------|
| 1 kHz sine     | -20.00                | 18.68        | 8.59             |
| Voice 1 kHz    | -20.00                | 31.41        | 37.18            |
| Voice 300-3kHz | -20.00                | 37.26        | 72.91            |

## 7. T-coil Measurement Criteria

### 7.1. Frequency Response


The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve, over the frequency range 300 Hz to 3000 Hz.

Figure 8.1 and Figure 8.2 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

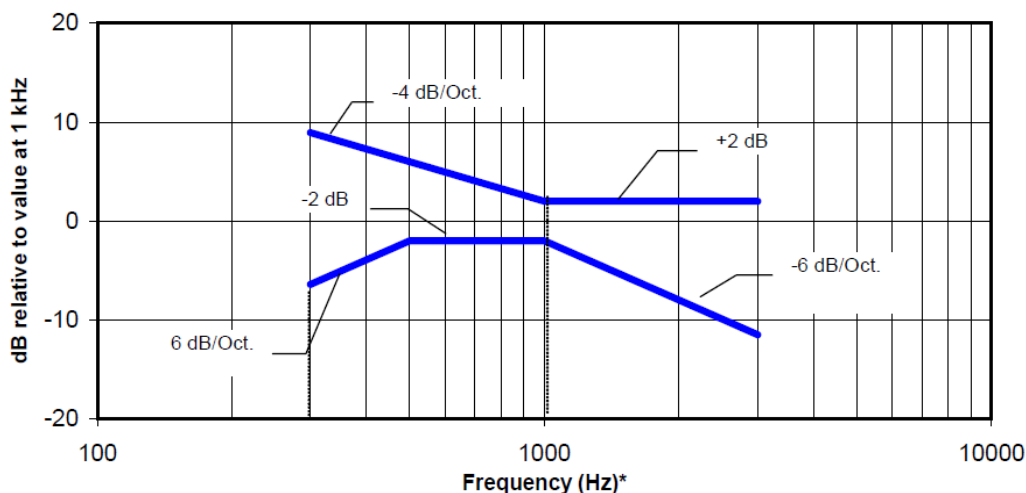

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Figure 8.1—Magnetic field frequency response for WDs with field strength  $\leq -15$  dB (A/m) at 1 kHz**

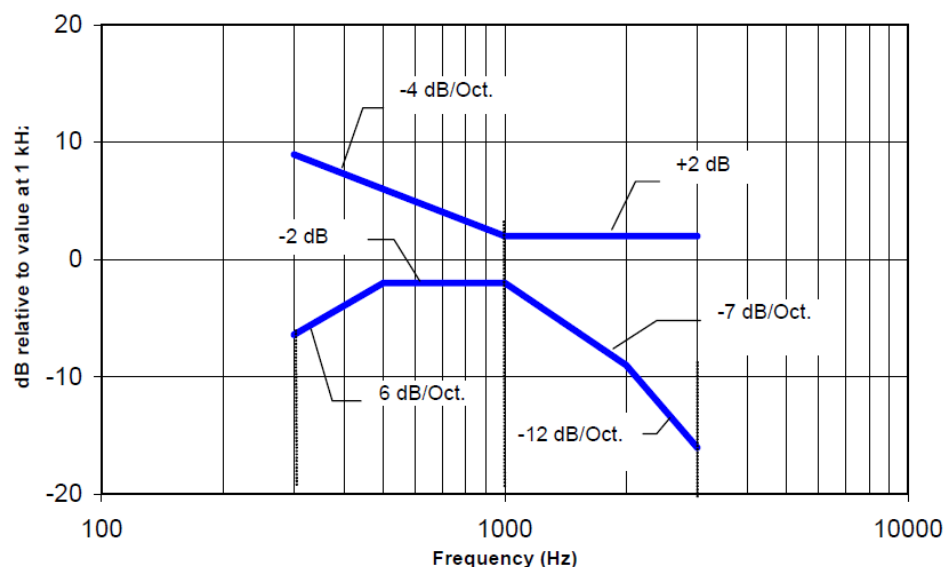

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Figure 8.2—Magnetic field frequency response for WDs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

## 7.2. Signal to Noise


This specifies the signal-to-noise quality requirement for the intended T-Coil signal from a WD. The worst signal to noise of the two T-Coil signal measurements, as determined in Clause 7, shall be used to determine the T-Coil mode category per Table 8.5.

Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criterion that can be measured is the RF immunity in T-Coil Mode. This is measured using the same procedure as for the audio coupling mode and at the same levels as specified in 6.4.

**Table 8.5—T-Coil signal-to-noise categories**

| Category    | Telephone parameters<br>WD signal quality<br>[(signal + noise)-to-noise ratio in decibels] |
|-------------|--------------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                              |
| Category T2 | 10 dB to 20 dB                                                                             |
| Category T3 | 20 dB to 30 dB                                                                             |
| Category T4 | >30 dB                                                                                     |

Measurement locations and reference plane to be used for the T-coil measurements

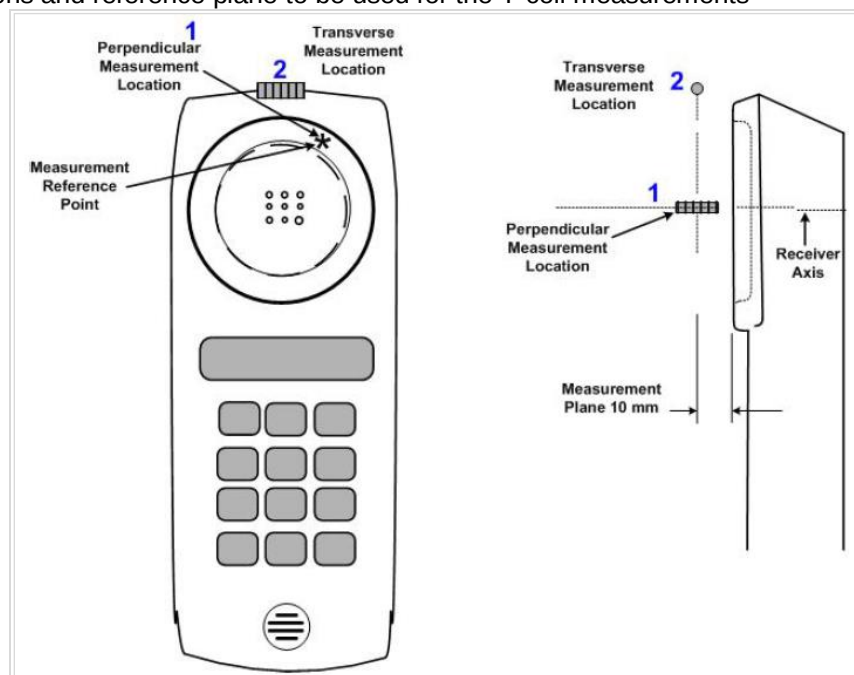

## 8. Device Under Test

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wide band, GPS and NFC. All models support at least one UICC based SIM. The second SIM, if present, is either UICC based pSIM (physical SIM) or e-SIM (electronic SIM). The device has a built-in inductive charging receiver. The rechargeable battery is also not user accessible.

ANT1 (all WWAN bands except for LTE Band 48) - located at the lower of the device.

ANT2 (all WWAN bands except for LTE Band 48 and Wi-Fi 2.4 GHz and Bluetooth) - located at the upper of the device.

ANT3 (LTE Band 48) – located at lower right corner of the device.

ANT4 (LTE Band 48 and Wi-Fi 5GHz Bands) – located at upper left corner of the device.

ANT5 (Wi-Fi 2.4/5 GHz Bands and Bluetooth) – located at lower left corner of the device.

|                  |                                 |
|------------------|---------------------------------|
| Normal operation | Held to head                    |
| Back Cover       | The Back Cover is not removable |

### 8.1. Air Interfaces and Operating Mode

| Air Interface | Bands (MHz)             | Type | C63.19 Tested | Simultaneous Transmitter | OTT Testing Required? Name of Voice Service <sup>1</sup> | Power Reduction | Audio Codecs Evaluated         |
|---------------|-------------------------|------|---------------|--------------------------|----------------------------------------------------------|-----------------|--------------------------------|
| GSM           | 850                     | VO   | Yes           | Wi-Fi, BT                | CMRS                                                     | NA              | EFR                            |
|               | 1900                    |      |               |                          |                                                          | No              |                                |
|               | GPRS/EDGE               | DT   | Yes           | Wi-Fi, BT                | Yes <sup>3</sup> FaceTime <sup>1</sup>                   | NA              | AAC-ELD                        |
| W-CDMA (UMTS) | 850                     | VO   | Yes           | Wi-Fi, BT                | CMRS                                                     | NA              | AMR-NB & AMR-WB                |
|               | 1700                    |      |               |                          |                                                          |                 |                                |
|               | 1900                    | VD   | Yes           | Wi-Fi, BT                | Yes <sup>3</sup> FaceTime <sup>1</sup>                   | NA              | AAC-ELD                        |
| HSPA          |                         |      |               |                          |                                                          |                 |                                |
| CDMA          | 800                     | VO   | Yes           | Wi-Fi, BT                | CMRS                                                     | NA              | EVRC & EVRC-B                  |
|               | 1900                    |      |               |                          |                                                          |                 |                                |
|               | Ev-Do                   | VD   | Yes           | Wi-Fi, BT                | Yes <sup>3</sup> FaceTime <sup>1</sup>                   | NA              | AAC-ELD                        |
| LTE - FDD     | 600 (B71)               | VD   | Yes           | Wi-Fi, BT                | Yes <sup>3</sup> FaceTime & VoLTE <sup>1</sup>           | NA              | AMR-NB, AMR-WB, EVS, & AAC-ELD |
|               | 700 (B12/13/14/17)      |      |               |                          |                                                          |                 |                                |
|               | 850 (B5/26)             |      |               |                          |                                                          |                 |                                |
|               | 1700 (B4/66)            |      |               |                          |                                                          |                 |                                |
|               | 1900 (B2/25)            |      |               |                          |                                                          |                 |                                |
|               | 2300 (B30)              |      |               |                          |                                                          |                 |                                |
|               | 2500 (B7)               |      |               |                          |                                                          |                 |                                |
| LTE – TDD     | 2600 (B41) <sup>2</sup> | VD   | Yes           | Wi-Fi, BT                | Yes <sup>3</sup> FaceTime & VoLTE <sup>1</sup>           | NA              | AMR-NB, AMR-WB, EVS, & AAC-ELD |
|               | 3600 (B48)              |      |               |                          |                                                          |                 |                                |
| Wi-Fi         | 2450                    | VD   | Yes           | WWAN                     | Yes <sup>3</sup> FaceTime & Wi-Fi calling <sup>1</sup>   | NA              | AMR-NB, AMR-WB, EVS, & AAC-ELD |
|               | 5200 (U-NII-1)          |      |               | WWAN, BT                 |                                                          |                 |                                |
|               | 5300 (U-NII-2A)         |      |               |                          |                                                          |                 |                                |
|               | 5500 (U-NII-2C)         |      |               |                          |                                                          |                 |                                |
|               | 5800 (U-NII-3)          |      |               |                          |                                                          |                 |                                |
| BT            | 2450                    | DT   | NA            | WWAN, Wi-Fi 5GHz         | NA                                                       | NA              | N/A                            |

Type

VO: Legacy Cellular Voice Service  
 DT: Digital Transport only (no voice)  
 VD: IP Voice Service over Digital Transport  
 CMRS: Commercial Mobile Radio Service

Note:

- For protocols not listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation, the average speech level of -20 dBm0 was used
- LTE-TDD was tested using Power Class II
- [For PAG REUSE](#)

## 9. Investigations (Antenna, Codec, & Air Interface)

### 9.1. Antenna Investigation

An investigation was performed to determine the worst-case antenna per technology. All subsequent measurements were determined by this investigation.

#### 9.1.1. Standard Phone Application

| Note | Mode:                                                             | Channel and Frequency | Bandwidth (Data Rate) | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating |
|------|-------------------------------------------------------------------|-----------------------|-----------------------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|
| 1    | GSM 850<br>Voice Coder<br>Speechcodec Low                         | 190<br>836.6 MHz      | N/A                   | ANT1    | z (Axial)       | 5.51         | -21.41       | -49.95                | 0.45                | 34.61        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -2.65        | -25.51       | -49.94                |                     | 39.76        | T4       |
|      |                                                                   |                       |                       | ANT2    | z (Axial)       | 5.86         | -21.77       | -49.95                | 0.26                | <b>34.50</b> | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -3.03        | -26.16       | -49.94                |                     | 39.72        | T4       |
| 2    | W-CDMA BII<br>AMR-NB<br>Bit rate: 4.75 kbps                       | 9400<br>1880 MHz      | N/A                   | ANT1    | z (Axial)       | 5.51         | -36.45       | -49.95                | 1.29                | 43.42        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -2.88        | -34.86       | -49.94                |                     | <b>42.75</b> | T4       |
|      |                                                                   |                       |                       | ANT2    | z (Axial)       | 6.05         | -38.38       | -49.95                | 1.01                | 46.59        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -2.19        | -39.53       | -49.94                |                     | 44.78        | T4       |
| 3    | CDMA2000 BC0<br>RC1 / SO68 Full Fr<br>Voice Coder: 8K EVRC<br>Low | 384<br>836.52 MHz     | N/A                   | ANT1    | z (Axial)       | -3.19        | -37.84       | -48.82                | 1.62                | 37.15        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -7.93        | -35.08       | -48.16                |                     | <b>36.73</b> | T4       |
|      |                                                                   |                       |                       | ANT2    | z (Axial)       | -3.45        | -38.16       | -48.82                | 1.46                | 37.31        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -7.54        | -38.79       | -48.16                |                     | 37.26        | T4       |
| 4    | LTE Band 25 QPSK<br>1/49 RB, AMR-NB<br>Bit rate: 4.75 kbps        | 26365<br>1882.5 MHz   | 20 MHz                | ANT1    | z (Axial)       | 3.82         | -7.91        | -49.95                | 1.88                | 49.07        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -3.44        | -40.87       | -49.98                |                     | 44.48        | T4       |
|      |                                                                   |                       |                       | ANT2    | z (Axial)       | 5.46         | -8.83        | -49.95                | 2.00                | 47.52        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -3.70        | -41.36       | -49.98                |                     | <b>43.91</b> | T4       |
| 5    | LTE Band 41 QPSK<br>1/49 RB, AMR-NB<br>Bit rate: 4.75 kbps        | 40620<br>2593 MHz     | 20 MHz                | ANT1    | z (Axial)       | 6.20         | -33.49       | -49.95                | 1.93                | 45.72        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -4.74        | -31.45       | -49.98                |                     | 41.74        | T4       |
|      |                                                                   |                       |                       | ANT2    | z (Axial)       | 5.34         | -26.20       | -49.95                | 1.38                | <b>40.97</b> | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -3.52        | -37.97       | -49.98                |                     | 43.90        | T4       |
| 6    | LTE Band 48 QPSK<br>50/49 RB, EVS<br>Bit rate: 5.9 kbps           | 55990<br>3625 MHz     | 20 MHz                | ANT3    | z (Axial)       | 4.49         | -29.07       | -49.23                | 1.79                | <b>38.83</b> | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -4.23        | -33.04       | -49.23                |                     | 40.50        | T4       |
|      |                                                                   |                       |                       | ANT4    | z (Axial)       | 4.89         | -28.69       | -49.23                | 2.00                | 38.89        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -3.97        | -33.26       | -49.23                |                     | 41.01        | T4       |
| 7    | 802.11b<br>AMR-NB<br>Bit rate: 4.75 kbps                          | 6<br>2437 MHz         | 20 MHz                | ANT2    | z (Axial)       | -2.21        | -37.49       | -48.43                | 1.45                | 38.43        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -8.15        | -37.58       | -47.73                |                     | <b>37.88</b> | T4       |
|      |                                                                   |                       |                       | ANT5    | z (Axial)       | -1.91        | -38.08       | -48.43                | 1.70                | 38.92        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -8.25        | -38.43       | -47.73                |                     | 38.31        | T4       |
| 8    | 802.11a<br>AMR-NB<br>Bit rate: 4.75 kbps                          | 36<br>5180 MHz        | 20 MHz                | ANT4    | z (Axial)       | 0.37         | -37.74       | -48.43                | 2.00                | 41.57        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -4.98        | -39.07       | -47.73                |                     | 41.20        | T4       |
|      |                                                                   |                       |                       | ANT5    | z (Axial)       | 1.01         | -38.46       | -48.43                | 2.00                | 42.15        | T4       |
|      |                                                                   |                       |                       |         | y (Transversal) | -5.26        | -38.86       | -47.73                |                     | <b>41.11</b> | T4       |

#### Note(s):

1. ANT2 has been determined to be the worst-case antenna for GSM.
2. ANT1 has been determined to be the worst-case antenna for W-CDMA.
3. ANT1 has been determined to be the worst-case antenna for CDMA
4. ANT2 has been determined to be the worst-case antenna for LTE-FDD.
5. ANT2 has been determined to be the worst-case antenna for LTE-TDD Band 41.
6. ANT3 has been determined to be the worst-case antenna for LTE-TDD Band 48.
7. ANT2 has been determined to be the worst-case antenna for Wi-Fi 2.4 GHz.
8. ANT5 has been determined to be the worst-case antenna for Wi-Fi 5 GHz.

## 9.1.2. OTT Application

| Note | Mode:                                   | Channel and Frequency | Bandwidth (Data Rate) | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating |
|------|-----------------------------------------|-----------------------|-----------------------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|
| 1    | GSM 850<br>EGPRS 2 Slots<br>20 kbps     | 190<br>836.6 MHz      | N/A                   | ANT1    | z (Axial)       | 0.55         | -23.30       | -49.97                | 0.50                | 37.99        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -10.21       | -21.68       | -49.99                |                     | 34.12        | T4       |
|      |                                         |                       |                       | ANT2    | z (Axial)       | -0.08        | -21.02       | -49.97                | 0.43                | 34.75        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -11.58       | -20.82       | -49.99                |                     | 31.75        | T4       |
| 2    | W-CDMA BII<br>HSPA<br>28 kbps           | 9400<br>1880 MHz      | N/A                   | ANT1    | z (Axial)       | -0.02        | -28.14       | -49.95                | 0.86                | 35.12        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -9.11        | -27.29       | -49.94                |                     | 34.33        | T4       |
|      |                                         |                       |                       | ANT2    | z (Axial)       | -0.37        | -27.81       | -49.95                | 0.84                | 35.09        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -8.87        | -27.21       | -49.94                |                     | 34.28        | T4       |
| 3    | CDMA2000 BC0<br>Ev-Do Rev. 0<br>28 kbps | 384<br>836.52 MHz     | N/A                   | ANT1    | z (Axial)       | 0.12         | -41.82       | -49.95                | 0.91                | 44.91        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -7.79        | -43.29       | -49.94                |                     | 40.54        | T4       |
|      |                                         |                       |                       | ANT2    | z (Axial)       | 0.09         | -37.07       | -49.95                | 1.13                | 43.58        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -7.77        | -37.78       | -49.94                |                     | 39.73        | T4       |
| 4    | CDMA2000 BC0<br>Ev-Do Rev. A<br>28 kbps | 384<br>836.52 MHz     | N/A                   | ANT1    | z (Axial)       | 0.27         | -28.28       | -49.95                | 1.01                | 36.32        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -9.08        | -28.06       | -49.98                |                     | 34.90        | T4       |
|      |                                         |                       |                       | ANT2    | z (Axial)       | 0.44         | -32.76       | -49.99                | 0.95                | 39.06        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -8.13        | -33.28       | -49.95                |                     | 36.66        | T4       |
| 5    | LTE Band 25 QPSK<br>1/49 RB<br>28 kbps  | 26365<br>1882.5 MHz   | 20 MHz                | ANT1    | z (Axial)       | -0.83        | -39.74       | -49.95                | 1.28                | 43.78        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -8.82        | -40.97       | -49.94                |                     | 39.14        | T4       |
|      |                                         |                       |                       | ANT2    | z (Axial)       | -0.98        | -39.57       | -49.95                | 1.27                | 42.76        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -8.78        | -41.11       | -49.94                |                     | 39.16        | T4       |
| 6    | LTE Band 41 QPSK<br>1/49 RB<br>28 kbps  | 40620<br>2593 MHz     | 20 MHz                | ANT1    | z (Axial)       | -0.55        | -31.87       | -49.98                | 1.17                | 36.61        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -8.88        | -33.59       | -49.98                |                     | 35.97        | T4       |
|      |                                         |                       |                       | ANT2    | z (Axial)       | -0.36        | -31.69       | -49.98                | 1.15                | 36.73        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -8.98        | -33.29       | -49.98                |                     | 35.87        | T4       |
| 7    | LTE Band 48 QPSK<br>1/49 RB<br>28 kbps  | 55990<br>3625 MHz     | 20 MHz                | ANT3    | z (Axial)       | 2.51         | -34.76       | -49.23                | 0.75                | 37.26        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -6.60        | -45.16       | -49.23                |                     | 38.56        | T4       |
|      |                                         |                       |                       | ANT4    | z (Axial)       | 2.53         | -35.50       | -49.23                | 0.81                | 38.03        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -6.63        | -45.67       | -49.23                |                     | 39.04        | T4       |
| 8    | 802.11b<br>28 kbps                      | 6<br>2437 MHz         | 20 MHz<br>(1 Mbps)    | ANT2    | z (Axial)       | -0.12        | -31.35       | -48.39                | 0.90                | 37.13        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -12.20       | -30.75       | -47.63                |                     | 32.09        | T4       |
|      |                                         |                       |                       | ANT5    | z (Axial)       | 0.05         | -31.04       | -48.39                | 0.95                | 37.33        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -10.66       | -30.77       | -47.63                |                     | 33.20        | T4       |
| 9    | 802.11a<br>28 kbps                      | 36<br>5180 MHz        | 20 MHz<br>(6 Mbps)    | ANT4    | z (Axial)       | 0.01         | -31.32       | -48.39                | 1.01                | 37.10        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -10.51       | -32.08       | -47.63                |                     | 33.29        | T4       |
|      |                                         |                       |                       | ANT5    | z (Axial)       | 0.04         | -33.38       | -48.39                | 0.94                | 38.08        | T4       |
|      |                                         |                       |                       |         | y (Transversal) | -10.54       | -34.95       | -47.63                |                     | 34.08        | T4       |

## Note:

1. ANT2 has been determined to be the worst-case antenna for GSM.
2. ANT2 has been determined to be the worst-case antenna for W-CDMA.
3. ANT2 has been determined to be the worst-case antenna for CDMA. Ev-Do Rel. 0.
4. ANT1 has been determined to be the worst-case antenna for CDMA Ev-Do Rev. A.
5. ANT1 has been determined to be the worst-case antenna for LTE-FDD.
6. ANT2 has been determined to be the worst-case antenna for LTE -TDD Band 41.
7. ANT3 has been determined to be the worst-case antenna for LTE -TDD Band 48.
8. ANT2 has been determined to be the worst-case antenna for Wi-Fi 2.4 GHz.
9. ANT4 has been determined to be the worst-case antenna for Wi-Fi 5 GHz.

## 9.2. Standard Phone Application Codec Bit-rate Investigation

An investigation between the various codec configurations (Low/Mid/High bit rates for Narrowband, Wideband and EVS) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed on one band of each W-CDMA, LTE FDD and LTE TDD.

The highlighted results below were determined to be the worst-case codec configuration(s) for LTE and W-CDMA.

### W-CDMA Codec Investigation:

| W-CDMA Codec Investigation |               |        |        |               |        |        |                 |                                 |
|----------------------------|---------------|--------|--------|---------------|--------|--------|-----------------|---------------------------------|
| Codec State                | AMR-NB (kbps) |        |        | AMR-WB (kbps) |        |        | Orientation     | Band/Channel/<br>Bandw idth     |
|                            | 4.75          | 7.4    | 12.2   | 6.6           | 15.85  | 23.85  |                 |                                 |
| ABM1 (dB/m)                | 5.51          | 6.12   | 6.56   | 5.94          | 6.98   | 7.04   | z (Axial)       | W-CDMA BII<br>Ch. 9400<br>ANT 1 |
| ABM2 (dBA/m)               | -36.45        | -38.16 | -38.98 | -36.27        | -38.57 | -38.38 |                 |                                 |
| SNR (dB)                   | 43.42         | 48.23  | 48.79  | 45.90         | 48.97  | 47.71  |                 |                                 |
| Freq. Resposne (dB)        | 1.29          | 1.51   | 1.29   | 1.05          | 1.30   | 1.35   |                 |                                 |
| ABM1 (dB/m)                | -2.88         | -2.06  | -1.53  | -2.03         | -1.09  | -1.03  | y (Transversal) |                                 |
| ABM2 (dBA/m)               | -34.86        | -33.87 | -40.23 | -37.75        | -39.81 | -39.84 |                 |                                 |
| SNR (dB)                   | 42.75         | 45.10  | 46.31  | 43.75         | 46.77  | 45.83  |                 |                                 |

### VoLTE Codec Investigation:

| VoLTE Codec Investigation |               |        |        |               |        |        |              |        |              |                 |
|---------------------------|---------------|--------|--------|---------------|--------|--------|--------------|--------|--------------|-----------------|
| Codec State               | AMR-NB (kbps) |        |        | AMR-WB (kbps) |        |        | EVS (kbps)   |        |              | Orientation     |
|                           | 4.75          | 7.4    | 12.2   | 6.6           | 15.85  | 23.85  | 5.9          | 9.6    | 24.4         |                 |
| ABM1 (dB/m)               | 5.46          | 6.16   | 6.49   | 6.38          | 6.93   | 6.52   | 2.91         | 1.13   | 1.93         | z (Axial)       |
| ABM2 (dBA/m)              | -8.83         | -36.17 | -36.75 | -37.36        | -37.50 | -35.34 | -37.25       | -35.86 | -35.17       |                 |
| SNR (dB)                  | 47.52         | 47.56  | 47.31  | 47.31         | 49.15  | 44.53  | 45.05        | 41.17  | 40.50        |                 |
| Freq. Response (dB)       | 2.00          | 1.41   | 1.38   | 1.69          | 1.35   | 1.29   | 1.60         | 2.00   | 1.09         |                 |
| ABM1 (dB/m)               | -3.70         | -3.93  | -3.06  | -3.56         | -2.46  | -2.39  | 2.91         | -5.65  | -5.65        | y (Transversal) |
| ABM2 (dBA/m)              | -41.36        | -33.76 | -33.15 | -38.92        | -33.26 | -34.21 | -37.25       | -33.21 | -36.57       |                 |
| SNR (dB)                  | 43.91         | 42.86  | 44.33  | 43.01         | 44.31  | 43.51  | 45.05        | 39.06  | <b>38.04</b> |                 |
| ABM1 (dB/m)               | 5.34          | 6.35   | 6.89   | 6.96          | 7.33   | 6.79   | -3.62        | 2.11   | 2.57         | z (Axial)       |
| ABM2 (dBA/m)              | -26.20        | -35.82 | -33.83 | -34.99        | -29.80 | -34.58 | -34.11       | -33.06 | -29.81       |                 |
| SNR (dB)                  | 40.97         | 46.58  | 45.76  | 46.68         | 46.86  | 45.14  | 34.14        | 39.79  | 39.71        |                 |
| Freq. Response (dB)       | 1.38          | 1.70   | 1.35   | 0.89          | 1.45   | 1.37   | 1.04         | 0.37   | 1.05         |                 |
| ABM1 (dB/m)               | -3.52         | -3.71  | -1.76  | -1.42         | -0.74  | -0.89  | -10.58       | -5.73  | -5.63        | y (Transversal) |
| ABM2 (dBA/m)              | -37.97        | -37.55 | -35.07 | -33.75        | -36.80 | -38.03 | -35.76       | -35.60 | -36.13       |                 |
| SNR (dB)                  | 43.90         | 44.46  | 44.20  | 45.83         | 44.99  | 46.73  | <b>33.27</b> | 37.88  | 37.79        |                 |

### Note(s):

A bitrate investigation was performed on the pre-installed phone application to determine the worst-case bitrate:

1. For W-CDMA, it is observed that 4.75 kbps is the worst-case.
2. For LTE-FDD, it is observed that 24.40 kbps is the worst-case.
3. For LTE-TDD, it is observed that 5.90 kbps is the worst-case.

### 9.3. Standard Phone Application Air Interface Investigation

Using the worst-case bitrate found in §9.2, a limited set of bands/channels/bandwidths were then tested to confirm that there is no effect to the T-rating when changing the band/channel/bandwidth.

#### W-CDMA Air Interface Investigation:

| W-CDMA Air Interface Investigation          |                       |                           |         |                 |              |              |                       |                     |              |          |                  |
|---------------------------------------------|-----------------------|---------------------------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|------------------|
| Mode:                                       | Channel and Frequency | Bandwidth (if applicable) | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location         |
| W-CDMA BII<br>AMR-NB<br>Bit rate: 4.75 kbps | 9262<br>1852.4 MHz    | N/A                       | ANT 1   | z (Axial)       | 5.80         | -30.44       | -49.95                | 1.41                | 47.98        | T4       | 9.2, -7.5, 3.7   |
|                                             |                       |                           |         | y (Transversal) | -2.23        | -39.54       | -49.94                |                     | 45.76        | T4       | 9.6, -15.4, 3.7  |
|                                             | 9400<br>1880.0 MHz    | N/A                       | ANT 1   | z (Axial)       | 5.51         | -36.45       | -49.95                | 1.29                | 43.42        | T4       | 10.4, -8.3, 3.7  |
|                                             |                       |                           |         | y (Transversal) | -2.88        | -34.86       | -49.94                |                     | <b>42.75</b> | T4       | 10.4, -15, 3.7   |
|                                             | 9538<br>1907.6 MHz    | N/A                       | ANT 1   | z (Axial)       | 5.92         | -36.24       | -49.95                | 1.02                | 44.04        | T4       | 10.4, -8.8, 3.7  |
|                                             |                       |                           |         | y (Transversal) | -2.55        | -36.35       | -49.94                |                     | 43.55        | T4       | 10.4, -15, 3.7   |
| W-CDMA BV<br>AMR-NB<br>Bit rate: 4.75 kbps  | 4132<br>826.4 MHz     | N/A                       | ANT 1   | z (Axial)       | 5.77         | -33.14       | -51.53                | 2.00                | 42.05        | T4       | 10.4, -12.5, 3.7 |
|                                             |                       |                           |         | y (Transversal) | -2.86        | -33.85       | -51.42                |                     | 42.23        | T4       | 10, -17.1, 3.7   |
|                                             | 4183<br>836.6 MHz     | N/A                       | ANT 1   | z (Axial)       | 4.88         | -31.96       | -51.53                | 2.00                | <b>41.72</b> | T4       | 11.3, -12.5, 3.7 |
|                                             |                       |                           |         | y (Transversal) | -3.34        | -32.10       | -51.42                |                     | 41.98        | T4       | 9.2, -17.5, 3.7  |
|                                             | 4233<br>846.6 MHz     | N/A                       | ANT 1   | z (Axial)       | 5.78         | -36.41       | -51.53                | 2.00                | 42.19        | T4       | 11.1, -12.5, 3.7 |
|                                             |                       |                           |         | y (Transversal) | -2.86        | -33.48       | -51.42                |                     | 41.96        | T4       | 10.4, -17.1, 3.7 |

#### Note(s):

For all subsequent tests for W-CDMA, middle channel was used in conjunction with the worst-case bitrate found in §9.2.

**VoLTE Air Interface Investigation:**

| VoLTE Air Interface Investigation               |                              |                          |               |    |         |                 |                 |                 |                             |                           |                 |          |                 |
|-------------------------------------------------|------------------------------|--------------------------|---------------|----|---------|-----------------|-----------------|-----------------|-----------------------------|---------------------------|-----------------|----------|-----------------|
| Mode:                                           | Bandwidth<br>(if applicable) | Channel and<br>Frequency | RB Allocation |    | Antenna | Orientation     | ABM1<br>dB(A/m) | ABM2<br>dB(A/m) | Ambient<br>Noise<br>dB(A/m) | Freq.<br>Response<br>(dB) | ABM SNR<br>(dB) | T-Rating | Location        |
| LTE Band 25 QPSK<br>EVS<br>Bit rate: 24.4 kbps  | 20 MHz                       | 26140<br>1860 MHz        | 50            | 49 | ANT 2   | z (Axial)       | 1.48            | -28.88          | -48.72                      | 1.25                      | 38.92           | T4       | 8.3, -12.1, 3.7 |
|                                                 |                              |                          |               |    |         | y (Transversal) | -6.24           | -30.39          | -47.72                      |                           | 36.13           | T4       | 7.5, -15.4, 3.7 |
|                                                 |                              | 26365<br>1882.5 MHz      | 1             | 0  | ANT 2   | z (Axial)       | -2.56           | -24.21          | -49.11                      | 1.06                      | 42.62           | T4       | 4.2, -5.8, 3.7  |
|                                                 |                              |                          |               |    |         | y (Transversal) | -7.57           | -31.63          | -48.15                      |                           | 36.82           | T4       | 9.2, -17.1, 3.7 |
|                                                 |                              |                          | 1             | 49 | ANT 2   | z (Axial)       | 1.93            | -35.17          | -49.11                      | 1.09                      | 40.50           | T4       | 8.3, -10.4, 3.7 |
|                                                 |                              |                          |               |    |         | y (Transversal) | -5.65           | -36.57          | -48.15                      |                           | 38.04           | T4       | 9.2, -16.7, 3.7 |
|                                                 |                              |                          | 1             | 99 | ANT 2   | z (Axial)       | 0.82            | -36.29          | -49.11                      | 1.32                      | 40.01           | T4       | 8.8, -10.8, 3.7 |
|                                                 |                              |                          |               |    |         | y (Transversal) | -7.84           | -31.43          | -48.15                      |                           | 35.76           | T4       | 7.9, -15.8, 3.7 |
|                                                 |                              |                          | 50            | 0  | ANT 2   | z (Axial)       | 2.20            | -32.71          | -48.72                      | 1.16                      | 39.11           | T4       | 8.3, -10.4, 3.7 |
|                                                 |                              |                          |               |    |         | y (Transversal) | -5.78           | -28.94          | -47.72                      |                           | 37.23           | T4       | 8.8, -16.7, 3.7 |
|                                                 |                              |                          | 50            | 24 | ANT 2   | z (Axial)       | 2.21            | -35.34          | -48.72                      | 1.04                      | 40.01           | T4       | 8.8, -10.4, 3.7 |
|                                                 |                              |                          |               |    |         | y (Transversal) | -5.65           | -37.36          | -47.72                      |                           | 36.52           | T4       | 9.6, -17.1, 3.7 |
|                                                 |                              |                          | 50            | 49 | ANT 2   | z (Axial)       | 1.61            | -32.41          | -48.72                      | 1.09                      | 36.74           | T4       | 8.8, -9.2, 3.7  |
|                                                 |                              |                          |               |    |         | y (Transversal) | -7.61           | -34.63          | -47.72                      |                           | 30.53           | T4       | 8.8, -17.1, 3.7 |
|                                                 |                              |                          | 100           | 0  | ANT 2   | z (Axial)       | 2.25            | -33.02          | -48.72                      | 1.05                      | 40.97           | T4       | 8.3, -8.3, 3.7  |
|                                                 |                              |                          |               |    |         | y (Transversal) | -5.71           | -29.62          | -47.72                      |                           | 35.05           | T4       | 8.3, -16.7, 3.7 |
|                                                 |                              | 26590<br>1905 MHz        | 50            | 49 | ANT 2   | z (Axial)       | 0.58            | -28.47          | -48.72                      | 0.48                      | 41.48           | T4       | 12.5, -6.7, 3.7 |
|                                                 |                              |                          |               |    |         | y (Transversal) | -5.65           | -31.95          | -47.72                      |                           | 37.25           | T4       | 9.2, -16.7, 3.7 |
| LTE Band 25 16QAM<br>EVS<br>Bit rate: 24.4 kbps | 20 MHz                       | 26365<br>1882.5 MHz      | 50            | 49 | ANT 2   | z (Axial)       | 2.21            | -36.16          | -48.72                      | 1.07                      | 40.76           | T4       | 8.3, -10.4, 3.7 |
|                                                 |                              |                          |               |    |         | y (Transversal) | -5.61           | -37.22          | -47.72                      |                           | 37.40           | T4       | 8.8, -17.1, 3.7 |
| LTE Band 25 64QAM<br>EVS<br>Bit rate: 24.4 kbps | 20 MHz                       | 26365<br>1882.5 MHz      | 50            | 49 | ANT 2   | z (Axial)       | 2.15            | -30.99          | -48.72                      | 0.96                      | 38.61           | T4       | 8.3, -9.6, 3.7  |
|                                                 |                              |                          |               |    |         | y (Transversal) | -5.84           | -35.76          | -47.72                      |                           | 37.64           | T4       | 8.8, -16.7, 3.7 |
| LTE Band 26 QPSK<br>EVS<br>Bit rate: 24.4 kbps  | 15 MHz                       | 26865<br>831.5 MHz       | 36            | 39 | ANT 2   | z (Axial)       | 2.58            | -36.88          | -48.72                      | 1.11                      | 44.52           | T4       | 7.9, -8.8, 3.7  |
|                                                 |                              |                          |               |    |         | y (Transversal) | -5.64           | -38.64          | -47.72                      |                           | 39.53           | T4       | 8.8, -17.1, 3.7 |
| LTE Band 12 QPSK<br>EVS<br>Bit rate: 24.4 kbps  | 10 MHz                       | 23095<br>707.5 MHz       | 25            | 25 | ANT 2   | z (Axial)       | 2.16            | -37.35          | -48.72                      | 1.19                      | 42.77           | T4       | 8.3, -9.2, 3.7  |
|                                                 |                              |                          |               |    |         | y (Transversal) | -5.68           | -36.69          | -47.72                      |                           | 39.52           | T4       | 8.8, -17.1, 3.7 |

**Note(s):**

For all subsequent tests for LTE-FDD, middle channel, 50% RB size and High RB allocation were used in conjunction with the worst-case bitrate found in §9.2.

**VoLTE Air Interface Investigation (continued):**

| VoLTE Air Interface Investigation              |                              |                          |               |    |         |                 |                 |                 |                             |                           |                 |          |                  |
|------------------------------------------------|------------------------------|--------------------------|---------------|----|---------|-----------------|-----------------|-----------------|-----------------------------|---------------------------|-----------------|----------|------------------|
| Mode:                                          | Bandwidth<br>(if applicable) | Channel and<br>Frequency | RB Allocation |    | Antenna | Orientation     | ABM1<br>dB(A/m) | ABM2<br>dB(A/m) | Ambient<br>Noise<br>dB(A/m) | Freq.<br>Response<br>(dB) | ABM SNR<br>(dB) | T-Rating | Location         |
| LTE Band 41 QPSK<br>EVS<br>Bit rate: 5.9 kbps  | 20 MHz                       | 39750<br>2506 MHz        | 50            | 49 | ANT 2   | z (Axial)       | 2.89            | -32.15          | -48.39                      | 1.71                      | 38.54           | T4       | 8.3, -7.5, 3.7   |
|                                                |                              |                          |               |    |         | y (Transversal) | -6.15           | -34.51          | -47.63                      |                           | 37.82           | T4       | 7.9, -16.3, 3.7  |
|                                                |                              | 40185<br>2549.5 MHz      | 50            | 49 | ANT 2   | z (Axial)       | 2.83            | -28.66          | -48.39                      | 1.61                      | 37.96           | T4       | 8.8, -7.5, 3.7   |
|                                                |                              |                          |               |    |         | y (Transversal) | -5.97           | -35.95          | -47.63                      |                           | 38.18           | T4       | 8.3, -16.7, 3.7  |
|                                                |                              | 40620<br>2593 MHz        | 1             | 0  | ANT 2   | z (Axial)       | -1.51           | -28.13          | -48.72                      | 1.02                      | 33.79           | T4       | 8.8, -10.8, 3.7  |
|                                                |                              |                          |               |    |         | y (Transversal) | -9.40           | -35.19          | -47.72                      |                           | 33.90           | T4       | 7.9, -20, 3.7    |
|                                                |                              |                          | 1             | 49 | ANT 2   | z (Axial)       | -3.62           | -34.11          | -48.72                      | 1.04                      | 34.14           | T4       | 8.8, -11.7, 3.7  |
|                                                |                              |                          |               |    |         | y (Transversal) | -10.58          | -35.76          | -47.72                      |                           | 33.27           | T4       | 12.1, -14.6, 3.7 |
|                                                |                              |                          | 1             | 99 | ANT 2   | z (Axial)       | -2.37           | -33.76          | -48.72                      | 0.98                      | 35.36           | T4       | 8.3, -12.1, 3.7  |
|                                                |                              |                          |               |    |         | y (Transversal) | -9.69           | -36.85          | -47.72                      |                           | 35.06           | T4       | 8.8, -13.8, 3.7  |
|                                                |                              |                          | 50            | 0  | ANT 2   | z (Axial)       | -1.55           | -33.70          | -48.72                      | 0.61                      | 35.00           | T4       | 8.3, -5, 3.7     |
|                                                |                              |                          |               |    |         | y (Transversal) | -6.97           | -36.06          | -47.63                      |                           | 37.52           | T4       | 6.3, -16.7, 3.7  |
|                                                |                              |                          | 50            | 24 | ANT 2   | z (Axial)       | -3.04           | -33.26          | -48.72                      | 1.59                      | 34.52           | T4       | 7.5, -12.5, 3.7  |
|                                                |                              |                          |               |    |         | y (Transversal) | -10.91          | -34.94          | -47.72                      |                           | 34.06           | T4       | 10.4, -0.4, 3.7  |
|                                                |                              |                          | 50            | 49 | ANT 2   | z (Axial)       | -2.67           | -25.22          | -48.72                      | 1.63                      | 32.96           | T4       | 4.6, -8.3, 3.7   |
|                                                |                              |                          |               |    |         | y (Transversal) | -10.07          | -24.74          | -47.72                      |                           | 33.69           | T4       | 6.7, -12.9, 3.7  |
|                                                |                              |                          | 100           | 0  | ANT 2   | z (Axial)       | 2.92            | -34.14          | -48.39                      | 1.63                      | 40.71           | T4       | 8.3, -12.5, 3.7  |
|                                                |                              |                          |               |    |         | y (Transversal) | -6.25           | -36.72          | -47.63                      |                           | 37.83           | T4       | 7.9, -17.9, 3.7  |
|                                                |                              | 41055<br>2636.5 MHz      | 50            | 49 | ANT 2   | z (Axial)       | 2.76            | -33.51          | -48.39                      | 1.94                      | 38.38           | T4       | 8.3, -7.1, 3.7   |
|                                                |                              |                          |               |    |         | y (Transversal) | -6.59           | -35.89          | -47.63                      |                           | 37.30           | T4       | 7.9, -16.7, 3.7  |
|                                                |                              | 41490<br>2680 MHz        | 50            | 49 | ANT 2   | z (Axial)       | 2.72            | -30.40          | -48.39                      | 1.99                      | 38.84           | T4       | 8.8, -8.3, 3.7   |
|                                                |                              |                          |               |    |         | y (Transversal) | -6.56           | -30.78          | -47.63                      |                           | 36.92           | T4       | 5.8, -15.8, 3.7  |
| LTE Band 41 QPSK<br>EVS<br>Bit rate: 5.9 kbps  | 15 MHz                       | 40620<br>2593 MHz        | 36            | 39 | ANT 2   | z (Axial)       | 1.63            | -33.68          | -48.39                      | 1.61                      | 37.42           | T4       | 8.3, -4.6, 3.7   |
|                                                |                              |                          |               |    |         | y (Transversal) | -5.75           | -36.24          | -47.63                      |                           | 38.59           | T4       | 8.3, -16.7, 3.7  |
|                                                | 10 MHz                       | 40620<br>2593 MHz        | 25            | 25 | ANT 2   | z (Axial)       | 2.71            | -30.35          | -48.39                      | 1.69                      | 38.91           | T4       | 8.3, -7.9, 3.7   |
|                                                |                              |                          |               |    |         | y (Transversal) | -7.71           | -28.88          | -47.63                      |                           | 35.80           | T4       | 7.9, -15, 3.7    |
| LTE Band 41 16QAM<br>EVS<br>Bit rate: 5.9 kbps | 20 MHz                       | 40620<br>2593 MHz        | 50            | 49 | ANT 2   | z (Axial)       | 2.61            | -23.97          | -48.39                      | 2.00                      | 34.88           | T4       | 7.9, -8.3, 3.7   |
|                                                |                              |                          |               |    |         | y (Transversal) | -7.83           | -23.81          | -47.63                      |                           | 36.68           | T4       | 7.5, -13.3, 3.7  |
| LTE Band 41 64QAM<br>EVS<br>Bit rate: 5.9 kbps | 20 MHz                       | 40620<br>2593 MHz        | 50            | 49 | ANT 2   | z (Axial)       | 2.33            | -28.24          | -48.39                      | 1.55                      | 38.37           | T4       | 9.6, -8.3, 3.7   |
|                                                |                              |                          |               |    |         | y (Transversal) | -5.63           | -36.64          | -47.63                      |                           | 38.62           | T4       | 7.9, -16.7, 3.7  |

**Note(s):**

For all subsequent tests for LTE-TDD, middle channel, QPSK, 50% RB size and High RB allocation were used in conjunction with the worst-case bitrate found in §9.2.

## 9.4. Standard Phone Application VoWi-Fi Codec Investigation

An investigation between the various codec configurations (Low/Mid/High bit rates for Narrowband, Wideband and EVS) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed for each Wi-Fi 2.4GHz and 5GHz.

The highlighted results below were determined to be the worst case codec configuration(s) for Wi-Fi 2.4GHz and 5GHz

| VoWi-Fi Codec Investigation |                 |        |        |                 |        |        |              |        |        |                 |                                          |
|-----------------------------|-----------------|--------|--------|-----------------|--------|--------|--------------|--------|--------|-----------------|------------------------------------------|
| Codec State                 | AMR-NB (kbit/s) |        |        | AMR-WB (kbit/s) |        |        | EVS (kbit/s) |        |        | Orientation     | Band/Channel/<br>Bandwidth               |
|                             | 4.75            | 7.4    | 12.2   | 6.6             | 15.85  | 23.85  | 5.9          | 9.6    | 24.4   |                 |                                          |
| ABM1 (dB/m)                 | -2.21           | 0.74   | 1.15   | 0.01            | 0.99   | 0.78   | -3.06        | 0.60   | 0.53   | z (Axial)       | 802.11b<br>Ch. 6<br>DSSS 1 Mbps<br>ANT2  |
| ABM2 (dBA/m)                | -37.49          | -38.32 | -38.29 | -37.94          | -38.25 | -38.44 | -37.88       | -38.47 | -39.29 |                 |                                          |
| SNR (dB)                    | 38.43           | 41.62  | 41.47  | 40.62           | 41.51  | 41.51  | 37.79        | 39.19  | 41.61  |                 |                                          |
| Freq. Resposne (dB)         | 1.45            | 1.82   | 1.97   | 2.00            | 1.95   | 1.82   | 0.79         | 1.30   | 2.00   |                 |                                          |
| ABM1 (dB/m)                 | -8.15           | -4.83  | -4.52  | -5.78           | -4.94  | -4.86  | -7.09        | -5.85  | -4.67  | y (Transversal) | 802.11b<br>Ch. 6<br>DSSS 1 Mbps<br>ANT2  |
| ABM2 (dBA/m)                | -37.58          | -38.63 | -38.88 | -39.08          | -39.18 | -37.58 | -38.42       | -38.96 | -39.54 |                 |                                          |
| SNR (dB)                    | 37.88           | 41.12  | 41.42  | 40.13           | 41.17  | 41.10  | 37.56        | 39.40  | 40.91  |                 |                                          |
| ABM1 (dB/m)                 | 1.01            | 0.88   | 1.03   | -0.38           | 0.92   | 1.10   | 0.27         | 0.66   | -0.19  | z (Axial)       | 802.11a<br>Ch. 36<br>BPSK 6 Mbps<br>ANT5 |
| ABM2 (dBA/m)                | -38.46          | -39.09 | -39.30 | -38.89          | -39.15 | -38.59 | -35.88       | -37.25 | -31.35 |                 |                                          |
| SNR (dB)                    | 42.15           | 41.89  | 42.04  | 40.86           | 41.89  | 41.72  | 40.51        | 42.10  | 39.03  |                 |                                          |
| Freq. Resposne (dB)         | 2.00            | 2.00   | 2.00   | 1.81            | 1.98   | 2.00   | 2.00         | 1.67   | 1.53   |                 |                                          |
| ABM1 (dB/m)                 | -5.26           | -4.81  | -5.04  | -6.17           | -5.22  | -5.00  | -5.46        | -3.07  | -5.69  | y (Transversal) | 802.11a<br>Ch. 36<br>BPSK 6 Mbps<br>ANT5 |
| ABM2 (dBA/m)                | -38.86          | -39.70 | -39.58 | -39.52          | -39.62 | -39.69 | -38.68       | -35.44 | -32.41 |                 |                                          |
| SNR (dB)                    | 41.11           | 41.36  | 42.53  | 41.26           | 42.25  | 42.51  | 41.60        | 41.88  | 39.60  |                 |                                          |

### Note(s):

A bitrate investigation was performed on the pre-installed phone application to determine the worst-case bitrate:

1. For 802.11b, it is observed that 5.90 kbps is the worst-case.
2. For 802.11a, it is observed that 24.40 kbps is the worst-case.

## 9.5. Standard Phone Application VoWi-Fi Air Interface Investigation

| VoWi-Fi Air Interface Investigation           |                       |         |                  |           |                 |              |              |                       |                     |              |          |                  |
|-----------------------------------------------|-----------------------|---------|------------------|-----------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|------------------|
| Mode:                                         | Channel and Frequency | Antenna | Modulation/Index | Data Rate | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location         |
| 802.11b<br>EVS<br>Bit rate: 5.9 kbps          | 6<br>2437 MHz         | ANT 2   | CCK              | 5.5 Mbps  | z (Axial)       | 3.24         | -36.98       | -49.34                | 2.00                | 41.31        | T4       | 9.2, -9.2, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -5.33        | -38.39       | -49.20                |                     | 39.29        | T4       | 10, 0.4, 3.7     |
|                                               |                       |         |                  | 11 Mbps   | z (Axial)       | 3.43         | -37.05       | -49.34                | 2.00                | 41.58        | T4       | 8.8, -9.6, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -5.09        | -37.87       | -49.20                |                     | 39.34        | T4       | 9.6, 0, 3.7      |
| 802.11g<br>EVS<br>Bit rate: 5.9 kbps          | 6<br>2437 MHz         | ANT 2   | DSSS             | 1 Mbps    | z (Axial)       | 2.73         | -36.77       | -49.34                | 1.91                | 40.91        | T4       | 8.3, -10, 3.7    |
|                                               |                       |         |                  |           | y (Transversal) | -5.19        | -39.32       | -49.20                |                     | 39.03        | T4       | 9.2, 0, 3.7      |
|                                               |                       |         | QPSK             | 12 Mbps   | z (Axial)       | 1.72         | -35.82       | -49.34                | 1.99                | 40.85        | T4       | 8.8, -12.5, 3.7  |
|                                               |                       |         |                  |           | y (Transversal) | -5.14        | -39.59       | -49.20                |                     | 39.35        | T4       | 10.4, 0.8, 3.7   |
|                                               |                       |         | 64QAM            | 54 Mbps   | z (Axial)       | 2.81         | -37.04       | -49.34                | 1.74                | 40.93        | T4       | 8.8, -9.2, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -4.90        | -39.53       | -49.20                |                     | 39.15        | T4       | 9.2, 0.8, 3.7    |
| 802.11n<br>EVS<br>Bit rate: 5.9 kbps          | 6<br>2437 MHz         | ANT 2   | MCS0             | 6.5 Mbps  | z (Axial)       | 2.41         | -37.10       | -49.34                | 1.42                | 40.30        | T4       | 10, -8.3, 3.7    |
|                                               |                       |         |                  |           | y (Transversal) | -4.82        | -39.54       | -49.20                |                     | 38.92        | T4       | 7.9, -17.5, 3.7  |
|                                               |                       |         | MCS3             | 26 Mbps   | z (Axial)       | 1.91         | -37.19       | -49.34                | 2.00                | 41.25        | T4       | 9.6, -12.5, 3.7  |
|                                               |                       |         |                  |           | y (Transversal) | -5.58        | -39.60       | -49.20                |                     | 38.58        | T4       | 8.3, 0.4, 3.7    |
|                                               |                       |         | MCS7             | 65 Mbps   | z (Axial)       | 2.58         | -33.33       | -49.34                | 1.93                | 41.48        | T4       | 8.3, -11.7, 3.7  |
|                                               |                       |         |                  |           | y (Transversal) | -4.83        | -39.62       | -49.20                |                     | 39.39        | T4       | 8.8, 0, 3.7      |
| 802.11ac<br>EVS<br>Bit rate: 5.9 kbps         | 6<br>2437 MHz         | ANT 2   | MCS0             | 6.5 Mbps  | z (Axial)       | 0.69         | -35.53       | -49.34                | 1.65                | 39.43        | T4       | 7.9, -8.8, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -6.93        | -32.47       | -49.20                |                     | 38.14        | T4       | 8.8, -16.7, 3.7  |
|                                               |                       |         | MCS4             | 39 Mbps   | z (Axial)       | 1.10         | -33.76       | -49.34                | 1.14                | 38.70        | T4       | 8.8, -7.9, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -7.19        | -35.94       | -49.20                |                     | 37.88        | T4       | 9.2, -16.7, 3.7  |
|                                               |                       |         | MCS8             | 78 Mbps   | z (Axial)       | 0.38         | -34.53       | -49.34                | 1.71                | 38.99        | T4       | 10.8, -8.8, 3.7  |
|                                               |                       |         |                  |           | y (Transversal) | -8.06        | -33.83       | -49.20                |                     | 37.19        | T4       | 5.4, -16.7, 3.7  |
| 802.11ax<br>EVS<br>Bit rate: 5.9 kbps         | 6<br>2437 MHz         | ANT 2   | MCS0             | 7.3 Mbps  | z (Axial)       | 0.68         | -35.55       | -49.34                | 1.88                | 39.69        | T4       | 8.3, -11.3, 3.7  |
|                                               |                       |         |                  |           | y (Transversal) | -7.63        | -36.70       | -49.20                |                     | 37.44        | T4       | 10.4, -16.7, 3.7 |
|                                               |                       |         | MCS5             | 58.5 Mbps | z (Axial)       | -0.65        | -31.27       | -49.34                | 1.53                | 39.03        | T4       | 11.7, -12.1, 3.7 |
|                                               |                       |         |                  |           | y (Transversal) | -5.93        | -33.56       | -49.20                |                     | 38.93        | T4       | 8.3, -16.3, 3.7  |
|                                               |                       |         | MCS9             | 97.5 Mbps | z (Axial)       | 1.47         | -36.54       | -49.34                | 2.00                | 39.89        | T4       | 8.3, -8.3, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -8.20        | -36.52       | -49.20                |                     | 37.56        | T4       | 10.8, 0, 3.7     |
| 802.11a<br>EVS<br>Bit rate: 24.4 kbps         | 36<br>5180 MHz        | ANT 5   | QPSK             | 18 Mbps   | z (Axial)       | -1.88        | -37.73       | -48.50                | 1.24                | 39.68        | T4       | 8.3, -15, 3.7    |
|                                               |                       |         |                  |           | y (Transversal) | -6.19        | -34.75       | -47.59                |                     | 40.49        | T4       | 12.1, -0.4, 3.7  |
|                                               |                       |         | 64QAM            | 54 Mbps   | z (Axial)       | 0.22         | -37.49       | -48.50                | 1.30                | 40.15        | T4       | 7.9, -12.1, 3.7  |
|                                               |                       |         |                  |           | y (Transversal) | -7.01        | -37.82       | -47.59                |                     | 40.10        | T4       | 11.3, -2.1, 3.7  |
| 802.11n 20 MHz<br>EVS<br>Bit rate: 24.4 kbps  | 36<br>5180 MHz        | ANT 5   | MCS0             | 6.5 Mbps  | z (Axial)       | 0.97         | -37.83       | -48.50                | 1.44                | 39.93        | T4       | 7.9, -8.8, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -6.50        | -39.38       | -47.59                |                     | 39.82        | T4       | 9.2, -2.5, 3.7   |
|                                               |                       |         | MCS3             | 26 Mbps   | z (Axial)       | 1.02         | -37.08       | -48.50                | 1.34                | 40.00        | T4       | 7.9, -8.3, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -3.73        | -39.25       | -47.59                |                     | 40.31        | T4       | 9.2, -16.7, 3.7  |
|                                               |                       |         | MCS7             | 65 Mbps   | z (Axial)       | -0.10        | -38.67       | -48.50                | 1.46                | 42.55        | T4       | 7.5, -4.6, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -4.36        | -43.65       | -47.59                |                     | 40.76        | T4       | 8.8, -20, 3.7    |
| 802.11n 40 MHz<br>EVS<br>Bit rate: 24.4 kbps  | 38<br>5190 MHz        | ANT 5   | MCS0             | 13.5 Mbps | z (Axial)       | -3.08        | -38.81       | -48.50                | 1.06                | 37.65        | T4       | 7.5, -10, 3.7    |
|                                               |                       |         |                  |           | y (Transversal) | -8.97        | -39.25       | -47.59                |                     | 38.18        | T4       | 10, -1.3, 3.7    |
|                                               |                       |         | MCS3             | 54 Mbps   | z (Axial)       | -2.49        | -38.96       | -48.50                | 1.49                | 38.19        | T4       | 7.1, -9.2, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -9.74        | -39.33       | -47.59                |                     | 37.76        | T4       | 10.4, -1.7, 3.7  |
|                                               |                       |         | MCS7             | 135 Mbps  | z (Axial)       | -3.50        | -39.03       | -48.50                | 1.45                | 37.83        | T4       | 7.9, -9.2, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -9.54        | -37.46       | -47.59                |                     | 38.34        | T4       | 11.7, -0.8, 3.7  |
| 802.11ac 20 MHz<br>EVS<br>Bit rate: 24.4 kbps | 36<br>5180 MHz        | ANT1    | MCS0             | 6.5 Mbps  | z (Axial)       | -2.96        | -38.25       | -48.50                | 1.43                | 37.29        | T4       | 7.5, -9.2, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -9.12        | -39.17       | -47.59                |                     | 38.12        | T4       | 11.3, -0.4, 3.7  |
|                                               |                       |         | MCS4             | 39 Mbps   | z (Axial)       | -2.93        | -38.69       | -48.50                | 1.24                | 38.12        | T4       | 8.3, -11.7, 3.7  |
|                                               |                       |         |                  |           | y (Transversal) | -9.36        | -38.60       | -47.59                |                     | 38.20        | T4       | 12.1, -0.4, 3.7  |
|                                               |                       |         | MCS8             | 78 Mbps   | z (Axial)       | -1.90        | -38.86       | -48.50                | 1.30                | 38.49        | T4       | 7.9, -8.8, 3.7   |
|                                               |                       |         |                  |           | y (Transversal) | -9.50        | -39.21       | -47.59                |                     | 38.18        | T4       | 11.3, -1.7, 3.7  |

**VoWi-Fi Air Interface Investigation (continued):**

| VoWi-Fi Air Interface Investigation           |                       |         |                  |            |                 |              |              |                       |                     |              |          |                  |
|-----------------------------------------------|-----------------------|---------|------------------|------------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|------------------|
| Mode:                                         | Channel and Frequency | Antenna | Modulation/Index | Data Rate  | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location         |
| 802.11ac 40 MHz<br>EVS<br>Bit rate: 24.4 kbps | 38<br>5190 MHz        | ANT 5   | MCS0             | 13.5 Mbps  | z (Axial)       | -3.02        | -38.89       | -48.50                | 1.19                | 37.78        | T4       | 7.9, -9.2, 3.7   |
|                                               |                       |         |                  |            | y (Transversal) | -9.44        | -39.52       | -47.59                |                     | 38.29        | T4       | 11.3, -1.3, 3.7  |
|                                               |                       |         | MCS5             | 108 Mbps   | z (Axial)       | -3.06        | -37.32       | -48.50                | 1.29                | 37.87        | T4       | 6.7, -8.8, 3.7   |
|                                               |                       |         |                  |            | y (Transversal) | -9.13        | -39.59       | -47.59                |                     | 38.34        | T4       | 9.6, -2.1, 3.7   |
|                                               |                       |         | MCS9             | 180 Mbps   | z (Axial)       | -2.59        | -37.27       | -48.50                | 1.40                | 37.95        | T4       | 7.5, -8.8, 3.7   |
|                                               |                       |         |                  |            | y (Transversal) | -7.78        | -39.56       | -47.59                |                     | 37.46        | T4       | 8.3, -17.1, 3.7  |
| 802.11ac 80 MHz<br>EVS<br>Bit rate: 24.4 kbps | 42<br>5210 MHz        | ANT 5   | MCS0             | 13.5 Mbps  | z (Axial)       | -3.42        | -37.09       | -49.01                | 1.23                | 38.04        | T4       | 8.3, -12.1, 3.7  |
|                                               |                       |         |                  |            | y (Transversal) | -9.59        | -32.62       | -48.72                |                     | 38.37        | T4       | 11.3, -0.8, 3.7  |
|                                               |                       |         | MCS5             | 108 Mbps   | z (Axial)       | -1.34        | -36.52       | -49.01                | 1.23                | 37.90        | T4       | 9.6, -8.3, 3.7   |
|                                               |                       |         |                  |            | y (Transversal) | -9.43        | -39.16       | -48.72                |                     | 36.59        | T4       | 10.8, -16.7, 3.7 |
|                                               |                       |         | MCS9             | 180 Mbps   | z (Axial)       | 1.49         | -31.35       | -49.01                | 1.43                | 39.62        | T4       | 8.3, -12.5, 3.7  |
|                                               |                       |         |                  |            | y (Transversal) | -5.61        | -35.09       | -48.72                |                     | 38.69        | T4       | 8.8, -16.7, 3.7  |
| 802.11ax 20 MHz<br>EVS<br>Bit rate: 24.4 kbps | 36<br>5180 MHz        | ANT 5   | MCS0             | 8.6 Mbps   | z (Axial)       | 2.76         | -33.78       | -49.01                | 1.40                | 39.74        | T4       | 8.3, -7.9, 3.7   |
|                                               |                       |         |                  |            | y (Transversal) | -5.78        | -36.50       | -48.72                |                     | 38.80        | T4       | 7.9, -15.4, 3.7  |
|                                               |                       |         | MCS5             | 58.5 Mbps  | z (Axial)       | 2.59         | -36.49       | -49.01                | 1.59                | 39.89        | T4       | 8.3, -10, 3.7    |
|                                               |                       |         |                  |            | y (Transversal) | -5.83        | -36.07       | -48.72                |                     | 38.59        | T4       | 8.8, -15.4, 3.7  |
|                                               |                       |         | MCS9             | 97.5 Mbps  | z (Axial)       | 2.67         | -35.72       | -49.01                | 1.48                | 40.03        | T4       | 8.3, -10, 3.7    |
|                                               |                       |         |                  |            | y (Transversal) | -5.56        | -36.30       | -48.72                |                     | 38.42        | T4       | 8.3, -16.3, 3.7  |
| 802.11ax 40 MHz<br>EVS<br>Bit rate: 24.4 kbps | 38<br>5190 MHz        | ANT 5   | MCS0             | 17.2 Mbps  | z (Axial)       | 2.65         | -35.79       | -49.01                | 1.55                | 39.38        | T4       | 8.3, -8.8, 3.7   |
|                                               |                       |         |                  |            | y (Transversal) | -6.63        | -35.82       | -48.72                |                     | 38.06        | T4       | 9.2, -1.3, 3.7   |
|                                               |                       |         | MCS5             | 117 Mbps   | z (Axial)       | 2.61         | -35.95       | -49.01                | 1.49                | 40.10        | T4       | 8.8, -10.4, 3.7  |
|                                               |                       |         |                  |            | y (Transversal) | -5.87        | -35.86       | -48.72                |                     | 38.91        | T4       | 7.9, -15.4, 3.7  |
|                                               |                       |         | MCS9             | 195 Mbps   | z (Axial)       | 1.48         | -36.23       | -49.01                | 1.44                | 39.17        | T4       | 8.3, -10.8, 3.7  |
|                                               |                       |         |                  |            | y (Transversal) | -5.43        | -36.45       | -48.72                |                     | 39.26        | T4       | 8.8, -16.3, 3.7  |
| 802.11ax 80 MHz<br>EVS<br>Bit rate: 24.4 kbps | 42<br>5210 MHz        | ANT 5   | MCS0             | 36 Mbps    | z (Axial)       | 2.64         | -34.34       | -49.01                | 1.60                | 40.48        | T4       | 8.3, -8.8, 3.7   |
|                                               |                       |         |                  |            | y (Transversal) | -7.56        | -36.20       | -48.72                |                     | 38.45        | T4       | 9.2, -2.1, 3.7   |
|                                               |                       |         | MCS5             | 245 Mbps   | z (Axial)       | 1.49         | -36.18       | -49.01                | 1.48                | 38.99        | T4       | 9.6, -11.7, 3.7  |
|                                               |                       |         |                  |            | y (Transversal) | -6.49        | -36.06       | -48.72                |                     | 39.45        | T4       | 9.2, -2.1, 3.7   |
|                                               |                       |         | MCS9             | 408.3 Mbps | z (Axial)       | 2.91         | -37.59       | -49.34                | 1.53                | 40.51        | T4       | 8.3, -8.3, 3.7   |
|                                               |                       |         |                  |            | y (Transversal) | -5.23        | -40.24       | -49.20                |                     | 39.17        | T4       | 8.3, -17.1, 3.7  |

**Note(s):**

- For all subsequent tests for 2.4 GHz, 802.11ac VHT20 MHz with MCS8 was used in conjunction with the worst-case bitrate found in §9.4.
- For all subsequent tests for 5 GHz, 802.11ac VHT80 MHz with MCS5 was used in conjunction with the worst-case bitrate found in §9.4.

## 9.6. OTT Codec Investigation

The OTT Application did not support a means for the test lab to change the codec's bitrates. When a VoIP call was established, the test lab recorded the bitrate used during that session for the supported technologies: EDGE was tested using 20.00 kbps as its worst-case bitrate; HSPA was tested using 28.00 kbps as its worst-case bitrate; Ev-Do was tested using 28.00 kbps as its worst-case bitrate; LTE-FDD and LTE-TDD was tested using 28.00 kbps as its worst-case bitrate; 802.11b was tested using 48.00 kbps as its worst-case bitrate; and 802.11a was tested using 48.00 kbps as its worst-case bitrate.

| Codec Bitrate per Technology (kbps) |       |
|-------------------------------------|-------|
| EDGE                                | 20.00 |
| HSPA                                | 28.00 |
| Rel. 0                              | 28.00 |
| Rev. A                              | 28.00 |
| LTE                                 | 28.00 |
| Wi-Fi                               | 48.00 |

## 9.7. OTT Air Interface Investigation

VoLTE's and VoWi-Fi's Air Interface Investigations were not evaluated as VoLTE and VoWi-Fi share the same PS Domain to establish a voice call; thus, VoLTE's and VoWi-Fi's worst-case modulation/channel/bandwidth were leveraged from the Standard Phone Application's Air Interface Investigation, §9.3 & 9.5.

### GSM Air Interface Investigation:

| EDGE Air Interface Investigation        |                       |                           |         |                 |              |              |                       |                     |              |          |                 |
|-----------------------------------------|-----------------------|---------------------------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| Mode:                                   | Channel and Frequency | Bandwidth (if applicable) | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
| GSM850<br>EDGE/EGPRS 2 Slots<br>20 kbps | 128<br>824.2 MHz      | N/A                       | ANT2    | z (Axial)       | 1.28         | -26.84       | -49.95                | 0.26                | 34.49        | T4       | 8.3, -7.9, 3.7  |
|                                         |                       |                           |         | y (Transversal) | -8.54        | -29.37       | -49.98                |                     | 35.17        | T4       | 7.9, -1.3, 3.7  |
|                                         | 190<br>836.6 MHz      | N/A                       | ANT2    | z (Axial)       | -0.08        | -21.02       | -49.97                | 0.43                | 34.75        | T4       | 7.1, -8.8, 3.7  |
|                                         |                       |                           |         | y (Transversal) | -11.58       | -20.82       | -49.99                |                     | 31.75        | T4       | 7.9, -13.3, 3.7 |
|                                         | 251<br>848.8 MHz      | N/A                       | ANT2    | z (Axial)       | -0.37        | -26.92       | -48.03                | 1.19                | 33.67        | T4       | 8.8, -10.4, 3.7 |
|                                         |                       |                           |         | y (Transversal) | -11.09       | -32.11       | -47.55                |                     | 33.15        | T4       | 3.8, -18.8, 3.7 |

#### Note(s):

For all subsequent tests for GSM EDGE, middle channel was used in conjunction with the worst-case bitrate found in §9.6.

### W-CDMA Air Interface Investigation:

| W-CDMA Air Interface Investigation |                       |                           |         |                 |              |              |                       |                     |              |          |                 |
|------------------------------------|-----------------------|---------------------------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| Mode:                              | Channel and Frequency | Bandwidth (if applicable) | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
| W-CDMA BII<br>HSPA<br>28 kbps      | 9262<br>1852.4 MHz    | N/A                       | ANT2    | z (Axial)       | 0.19         | -36.81       | -49.98                | 0.76                | 40.17        | T4       | 7.9, -8.3, 3.7  |
|                                    |                       |                           |         | y (Transversal) | -8.72        | -30.67       | -49.98                |                     | 37.49        | T4       | 7.9, -14.6, 3.7 |
|                                    | 9400<br>1880.0 MHz    | N/A                       | ANT2    | z (Axial)       | -0.37        | -27.81       | -49.95                | 0.84                | 35.09        | T4       | 7.9, -11.7, 3.7 |
|                                    |                       |                           |         | y (Transversal) | -8.87        | -27.21       | -49.94                |                     | 34.28        | T4       | 7.1, -14.6, 3.7 |
|                                    | 9538<br>1907.6 MHz    | N/A                       | ANT2    | z (Axial)       | -0.22        | -14.52       | -49.98                | 0.95                | 39.99        | T4       | 7.5, -7.9, 3.7  |
|                                    |                       |                           |         | y (Transversal) | -9.08        | -32.38       | -49.98                |                     | 37.91        | T4       | 6.3, -15.4, 3.7 |

#### Note(s):

For all subsequent tests for W-CDMA HSPA, middle channel was used in conjunction with the worst-case bitrate found in §9.6.

### CDMA Air Interface Investigation:

| CDMA Air Interface Investigation   |                       |                           |         |                 |              |              |                       |                     |              |          |                 |
|------------------------------------|-----------------------|---------------------------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| Mode:                              | Channel and Frequency | Bandwidth (if applicable) | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
| CDMA B0<br>Ev-Do Rel. 0<br>28 kbps | 1013<br>824.7 MHz     | N/A                       | ANT2    | z (Axial)       | 1.09         | -39.12       | -49.95                | 1.17                | 45.10        | T4       | 7.9, -8.8, 3.7  |
|                                    |                       |                           |         | y (Transversal) | -7.68        | -40.15       | -49.98                |                     | 40.39        | T4       | 8.8, -16.3, 3.7 |
|                                    | 384<br>836.52 MHz     | N/A                       | ANT2    | z (Axial)       | 0.09         | -37.07       | -49.95                | 1.13                | 43.58        | T4       | 7.9, -8.8, 3.7  |
|                                    |                       |                           |         | y (Transversal) | -7.77        | -37.78       | -49.94                |                     | 39.73        | T4       | 8.3, -16.7, 3.7 |
|                                    | 777<br>848.31 MHz     | N/A                       | ANT2    | z (Axial)       | 0.90         | -36.38       | -49.95                | 1.23                | 43.61        | T4       | 7.5, -8.8, 3.7  |
|                                    |                       |                           |         | y (Transversal) | -7.84        | -37.57       | -49.98                |                     | 39.85        | T4       | 8.8, -15.4, 3.7 |
| CDMA B0<br>Ev-Do Rev. A<br>28 kbps | 384<br>836.52 MHz     | N/A                       | ANT1    | z (Axial)       | 0.27         | -28.28       | -49.95                | 1.01                | 36.32        | T4       | 6.7, -7.9, 3.7  |
|                                    |                       |                           |         | y (Transversal) | -9.08        | -28.06       | -49.98                |                     | 34.90        | T4       | 7.5, -13.8, 3.7 |

#### Note(s):

For all subsequent tests for CDMA Ev-Do, middle channel and Ev-Do Rev. A were used in conjunction with the worst-case bitrate found in §9.6.

## 10. HAC (T-coil) Test Results

As the margin for the worst-case T-rating is greater than T3/T4, no further investigation is required into the technology's supported channels to affirm the T-rating.

### 10.1. Standard Phone Application

#### GSM/W-CDMA/CDMA:

| Mode:                                                              | Channel and Frequency | Bandwidth (Data Rate) | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location         | Plot Page # |
|--------------------------------------------------------------------|-----------------------|-----------------------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|------------------|-------------|
| GSM 850<br>Voice Coder<br>Speechcodec Low                          | 190<br>836.6 MHz      | N/A                   | ANT 2   | z (Axial)       | 5.86         | -21.77       | -49.95                | 0.26                | 34.50        | T4       | 8.8, -8.3, 3.7   | 1 - 3       |
|                                                                    |                       |                       |         | y (Transversal) | -3.03        | -26.16       | -49.94                |                     | 39.72        | T4       | 11.7, -0.4, 3.7  |             |
| GSM 1900<br>Voice Coder<br>Speechcodec Low                         | 661<br>1880 MHz       | N/A                   | ANT 2   | z (Axial)       | 5.60         | -24.57       | -49.98                | 0.21                | 36.60        | T4       | 8.8, -7.9, 3.7   | 4 - 6       |
|                                                                    |                       |                       |         | y (Transversal) | -2.97        | -29.25       | -49.98                |                     | 41.55        | T4       | 12.5, 0, 3.7     |             |
| W-CDMA BII<br>AMR-NB<br>Bit rate: 4.75 kbps                        | 9400<br>1880 MHz      | N/A                   | ANT 1   | z (Axial)       | 5.51         | -36.45       | -49.95                | 1.29                | 43.42        | T4       | 10.4, -8.3, 3.7  | 7 - 9       |
|                                                                    |                       |                       |         | y (Transversal) | -2.88        | -34.86       | -49.94                |                     | 42.75        | T4       | 10.4, -15, 3.7   |             |
| W-CDMA BIV<br>AMR-NB<br>Bit rate: 4.75 kbps                        | 1413<br>1732.6 MHz    | N/A                   | ANT 1   | z (Axial)       | 5.52         | -34.98       | -49.98                | 1.33                | 43.35        | T4       | 9.6, -8.3, 3.7   | 10 - 12     |
|                                                                    |                       |                       |         | y (Transversal) | -2.65        | -37.89       | -49.98                |                     | 42.74        | T4       | 11.7, -15.8, 3.7 |             |
| W-CDMA BV<br>AMR-NB<br>Bit rate: 4.75 kbps                         | 4183<br>836.6 MHz     | N/A                   | ANT 1   | z (Axial)       | 5.62         | -36.11       | -49.98                | 1.53                | 43.69        | T4       | 9.6, -8.3, 3.7   | 13 - 15     |
|                                                                    |                       |                       |         | y (Transversal) | -2.73        | -37.96       | -49.98                |                     | 42.97        | T4       | 10.8, -14.6, 3.7 |             |
| CDMA2000 BC0<br>RC1 / SO68 Full Fr<br>Voice Coder: 8K EVRC<br>Low  | 384<br>836.52 MHz     | N/A                   | ANT 1   | z (Axial)       | -3.19        | -37.84       | -48.82                | 1.62                | 37.15        | T4       | 7.5, -9.2, 3.7   | 16 - 18     |
|                                                                    |                       |                       |         | y (Transversal) | -7.93        | -35.08       | -48.16                |                     | 36.73        | T4       | 8.3, -17.5, 3.7  |             |
| CDMA2000 BC1<br>RC1 / SO68 Full Fr<br>Voice Coder: 8K EVRC<br>Low  | 600<br>1880 MHz       | N/A                   | ANT 1   | z (Axial)       | -4.19        | -33.40       | -48.82                | 1.43                | 35.45        | T4       | 5.4, -8.8, 3.7   | 19 - 21     |
|                                                                    |                       |                       |         | y (Transversal) | -8.27        | -33.37       | -48.16                |                     | 35.64        | T4       | 8.8, -17.1, 3.7  |             |
| CDMA2000 BC10<br>RC1 / SO68 Full Fr<br>Voice Coder: 8K EVRC<br>Low | 560<br>820 MHz        | N/A                   | ANT 1   | z (Axial)       | -3.35        | -37.64       | -48.82                | 1.44                | 36.96        | T4       | 7.5, -8.8, 3.7   | 22 - 24     |
|                                                                    |                       |                       |         | y (Transversal) | -8.14        | -38.75       | -48.16                |                     | 36.47        | T4       | 10, -17.1, 3.7   |             |

#### VoLTE:

| Mode:                                          | Bandwidth (Data Rate) | Channel and Frequency | RB Allocation |    | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        | Plot Page # |
|------------------------------------------------|-----------------------|-----------------------|---------------|----|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|-------------|
| LTE Band 7 QPSK<br>EVS<br>Bit rate: 24.4 kbps  | 20 MHz                | 21100<br>2535 MHz     | 50            | 49 | ANT 2   | z (Axial)       | 3.65         | -33.19       | -48.47                | 1.21                | 40.01        | T4       | 10, -7.1, 3.7   | 25 - 27     |
|                                                |                       |                       |               |    |         | y (Transversal) | -7.37        | -31.60       | -47.80                |                     | 36.77        | T4       | 7.5, -17.1, 3.7 |             |
| LTE Band 12 QPSK<br>EVS<br>Bit rate: 24.4 kbps | 10 MHz                | 23095<br>707.5 MHz    | 25            | 25 | ANT 2   | z (Axial)       | 2.16         | -37.35       | -48.72                | 1.19                | 42.77        | T4       | 8.3, -9.2, 3.7  | 28 - 30     |
|                                                |                       |                       |               |    |         | y (Transversal) | -5.68        | -36.69       | -47.72                |                     | 39.52        | T4       | 8.8, -17.1, 3.7 |             |
| LTE Band 25 QPSK<br>EVS<br>Bit rate: 24.4 kbps | 20 MHz                | 26365<br>1882.5 MHz   | 50            | 49 | ANT 2   | z (Axial)       | 1.61         | -32.41       | -48.72                | 1.09                | 36.74        | T4       | 8.8, -9.2, 3.7  | 31 - 33     |
|                                                |                       |                       |               |    |         | y (Transversal) | -7.61        | -34.63       | -47.72                |                     | 30.53        | T4       | 8.8, -17.1, 3.7 |             |
| LTE Band 26 QPSK<br>EVS<br>Bit rate: 24.4 kbps | 15 MHz                | 26865<br>831.5 MHz    | 36            | 39 | ANT 2   | z (Axial)       | 2.58         | -36.88       | -48.72                | 1.11                | 44.52        | T4       | 7.9, -8.8, 3.7  | 34 - 36     |
|                                                |                       |                       |               |    |         | y (Transversal) | -5.64        | -38.64       | -47.72                |                     | 39.53        | T4       | 8.8, -17.1, 3.7 |             |
| LTE Band 30 QPSK<br>EVS<br>Bit rate: 24.4 kbps | 10 MHz                | 27710<br>2310 MHz     | 25            | 25 | ANT 2   | z (Axial)       | 3.06         | -32.98       | -48.47                | 1.53                | 43.13        | T4       | 7.9, -8.3, 3.7  | 37 - 39     |
|                                                |                       |                       |               |    |         | y (Transversal) | -7.25        | -32.97       | -47.80                |                     | 38.26        | T4       | 5.4, -17.1, 3.7 |             |
| LTE Band 41 QPSK<br>EVS<br>Bit rate: 5.9 kbps  | 20 MHz                | 40620<br>2593 MHz     | 50            | 49 | ANT 2   | z (Axial)       | -2.67        | -25.22       | -48.72                | 1.63                | 32.96        | T4       | 4.6, -8.3, 3.7  | 40 - 42     |
|                                                |                       |                       |               |    |         | y (Transversal) | -10.07       | -24.74       | -47.72                |                     | 33.69        | T4       | 6.7, -12.9, 3.7 |             |
| LTE Band 48 QPSK<br>EVS<br>Bit rate: 5.9 kbps  | 20 MHz                | 55990<br>3625 MHz     | 50            | 49 | ANT 3   | z (Axial)       | 4.49         | -29.07       | -49.23                | 1.79                | 38.83        | T4       | 9.6, -10, 3.7   | 43 - 45     |
|                                                |                       |                       |               |    |         | y (Transversal) | -4.23        | -33.04       | -49.23                |                     | 40.50        | T4       | 9.2, -17.1, 3.7 |             |
| LTE Band 66 QPSK<br>EVS<br>Bit rate: 24.4 kbps | 20 MHz                | 132322<br>1745 MHz    | 50            | 49 | ANT 2   | z (Axial)       | 3.38         | -35.47       | -48.47                | 1.43                | 44.95        | T4       | 9.2, -6.7, 3.7  | 46 - 48     |
|                                                |                       |                       |               |    |         | y (Transversal) | -7.00        | -36.87       | -47.80                |                     | 38.96        | T4       | 7.5, 1.2, 3.7   |             |

**VoWi-Fi:**

| Mode:                                      | Channel and Frequency | Bandwidth (Data Rate)     | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location         | Plot Page # |
|--------------------------------------------|-----------------------|---------------------------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|------------------|-------------|
| 802.11ac EVS<br>Bit rate: 5.9 kbps         | 6<br>2437 MHz         | 20 MHz<br>(MCS8 78 Mbps)  | ANT2    | z (Axial)       | 0.38         | -34.53       | -49.34                | 1.71                | 38.99        | T4       | 10.8, -8.8, 3.7  | 49 - 51     |
|                                            |                       |                           |         | y (Transversal) | -8.06        | -33.83       | -49.20                |                     | 37.19        | T4       | 5.4, -16.7, 3.7  |             |
| 802.11ac 80 MHz EVS<br>Bit rate: 24.4 kbps | 42<br>5210 MHz        | 80 MHz<br>(MCS5 108 Mbps) | ANT 5   | z (Axial)       | -1.34        | -36.52       | -49.01                | 1.23                | 37.90        | T4       | 9.6, -8.3, 3.7   | 52 - 54     |
|                                            |                       |                           |         | y (Transversal) | -9.43        | -39.16       | -48.72                |                     | 36.59        | T4       | 10.8, -16.7, 3.7 |             |
|                                            | 58<br>5290 MHz        | 80 MHz<br>(MCS5 108 Mbps) | ANT 5   | z (Axial)       | 3.76         | -36.55       | -49.34                | 1.58                | 40.53        | T4       | 9.6, -8.3, 3.7   | 55 - 57     |
|                                            |                       |                           |         | y (Transversal) | -5.28        | -36.39       | -49.20                |                     | 38.67        | T4       | 7.5, -16.7, 3.7  |             |
|                                            | 106<br>5530 MHz       | 80 MHz<br>(MCS5 108 Mbps) | ANT 5   | z (Axial)       | 3.58         | -36.60       | -49.34                | 1.62                | 40.33        | T4       | 8.3, -9.6, 3.7   | 58 - 60     |
|                                            |                       |                           |         | y (Transversal) | -6.31        | -37.82       | -49.20                |                     | 38.23        | T4       | 12.1, 1.7, 3.7   |             |
|                                            | 155<br>5775 MHz       | 80 MHz<br>(MCS5 108 Mbps) | ANT 5   | z (Axial)       | 2.40         | -37.01       | -49.34                | 1.56                | 40.36        | T4       | 8.8, -12.1, 3.7  | 61 - 63     |
|                                            |                       |                           |         | y (Transversal) | -4.91        | -39.46       | -49.20                |                     | 38.50        | T4       | 8.8, -16.7, 3.7  |             |

**Note:**

The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19

## 10.2. OTT Application

| Mode                                     | Channel and Frequency | Bandwidth (Data Rate)     | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location         | Plot Page # |
|------------------------------------------|-----------------------|---------------------------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|------------------|-------------|
| GSM850<br>EDGE/EGPRS 2 Slots<br>20 kbps  | 251<br>848.8 MHz      | N/A                       | ANT2    | z (Axial)       | -0.37        | -26.92       | -48.03                | 1.19                | 33.67        | T4       | 8.8, -10.8, 3.7  | 1 - 3       |
|                                          |                       |                           |         | y (Transversal) | -11.09       | -32.11       | -47.55                |                     | 33.15        | T4       | -0.4, -12.9, 3.7 |             |
| GSM1900<br>EDGE/EGPRS 2 Slots<br>20 kbps | 810<br>1909.8 MHz     | N/A                       | ANT2    | z (Axial)       | 0.27         | -29.19       | -49.95                | 0.89                | 35.21        | T4       | 8.3, -8.3, 3.7   | 4 - 6       |
|                                          |                       |                           |         | y (Transversal) | -11.45       | -32.81       | -49.98                |                     | 34.37        | T4       | 14.6, 0, 3.7     |             |
| W-CDMA BII<br>HSPA<br>28 kbps            | 9400<br>1880 MHz      | N/A                       | ANT2    | z (Axial)       | -0.37        | -27.81       | -49.95                | 0.84                | 35.09        | T4       | 7.9, -11.7, 3.7  | 7 - 9       |
|                                          |                       |                           |         | y (Transversal) | -8.87        | -27.21       | -49.94                |                     | 34.28        | T4       | 7.1, -14.6, 3.7  |             |
| W-CDMA BIV<br>HSPA<br>28 kbps            | 1413<br>1732.6 MHz    | N/A                       | ANT2    | z (Axial)       | 1.00         | -35.95       | -49.95                | 0.95                | 39.45        | T4       | 8.3, -10.8, 3.7  | 10 - 12     |
|                                          |                       |                           |         | y (Transversal) | -7.87        | -37.81       | -49.98                |                     | 38.00        | T4       | 9.6, -15.4, 3.7  |             |
| W-CDMA BV<br>HSPA<br>28 kbps             | 4183<br>836.6 MHz     | N/A                       | ANT2    | z (Axial)       | 0.99         | -36.10       | -49.95                | 0.93                | 39.42        | T4       | 8.3, -10.8, 3.7  | 13 - 15     |
|                                          |                       |                           |         | y (Transversal) | -8.04        | -36.29       | -49.98                |                     | 37.96        | T4       | 9.2, -15, 3.7    |             |
| CDMA BC0<br>Rev. A<br>28 kbps            | 384<br>836.52 MHz     | N/A                       | ANT1    | z (Axial)       | 0.27         | -28.28       | -49.95                | 1.01                | 36.32        | T4       | 6.7, -7.9, 3.7   | 16 - 18     |
|                                          |                       |                           |         | y (Transversal) | -9.08        | -28.06       | -49.98                |                     | 34.90        | T4       | 7.5, -13.8, 3.7  |             |
| CDMA BC1<br>Rev. A<br>28 kbps            | 600<br>1880.00 MHz    | N/A                       | ANT1    | z (Axial)       | 0.31         | -32.83       | -49.95                | 1.15                | 42.73        | T4       | 7.9, -8.3, 3.7   | 19 - 21     |
|                                          |                       |                           |         | y (Transversal) | -8.04        | -35.34       | -49.98                |                     | 38.38        | T4       | 8.3, -17.1, 3.7  |             |
| CDMA BC10<br>Rev. A<br>28 kbps           | 560<br>820.00 MHz     | N/A                       | ANT1    | z (Axial)       | 0.31         | -35.93       | -49.95                | 1.11                | 42.55        | T4       | 7.9, -9.2, 3.7   | 22 - 24     |
|                                          |                       |                           |         | y (Transversal) | -8.10        | -34.36       | -49.98                |                     | 38.23        | T4       | 8.3, -16.7, 3.7  |             |
| LTE Band 7 QPSK<br>50/49<br>28 kbps      | 21100<br>2535 MHz     | 20 MHz                    | ANT1    | z (Axial)       | 0.00         | -37.22       | -48.39                | 0.52                | 39.45        | T4       | 10.8, -8.3, 3.7  | 25 - 27     |
|                                          |                       |                           |         | y (Transversal) | -10.49       | -39.26       | -47.63                |                     | 34.96        | T4       | 8.3, -17.5, 3.7  |             |
| LTE Band 12 QPSK<br>25/25<br>28 kbps     | 23095<br>707.5 MHz    | 10 MHz                    | ANT1    | z (Axial)       | -0.14        | -36.28       | -48.39                | 0.84                | 38.90        | T4       | 10.4, -8.3, 3.7  | 28 - 30     |
|                                          |                       |                           |         | y (Transversal) | -10.30       | -37.82       | -47.63                |                     | 35.19        | T4       | 7.9, -17.5, 3.7  |             |
| LTE Band 25 QPSK<br>50/49<br>28 kbps     | 26365<br>1882.5 MHz   | 20 MHz                    | ANT1    | z (Axial)       | -0.08        | -33.01       | -48.39                | 0.65                | 37.47        | T4       | 9.2, -7.9, 3.7   | 31 - 33     |
|                                          |                       |                           |         | y (Transversal) | -10.44       | -32.57       | -47.63                |                     | 33.88        | T4       | 6.7, -16.7, 3.7  |             |
| LTE Band 26 QPSK<br>36/39<br>28 kbps     | 26865<br>831.5 MHz    | 15 MHz                    | ANT1    | z (Axial)       | 0.07         | -36.66       | -48.39                | 0.75                | 38.87        | T4       | 10, -7.9, 3.7    | 34 - 36     |
|                                          |                       |                           |         | y (Transversal) | -10.23       | -33.55       | -47.63                |                     | 34.28        | T4       | 7.9, -17.1, 3.7  |             |
| LTE Band 30 QPSK<br>25/25<br>28 kbps     | 27710<br>2310 MHz     | 10 MHz                    | ANT1    | z (Axial)       | -0.06        | -33.44       | -48.39                | 0.71                | 37.40        | T4       | 9.2, -8.3, 3.7   | 37 - 39     |
|                                          |                       |                           |         | y (Transversal) | -10.17       | -32.75       | -47.63                |                     | 33.87        | T4       | 7.9, -17.1, 3.7  |             |
| LTE Band 41 QPSK<br>50/49<br>28 kbps     | 40620<br>2593 MHz     | 20 MHz                    | ANT2    | z (Axial)       | -0.17        | -25.47       | -48.39                | 0.91                | 33.83        | T4       | 8.3, -7.9, 3.7   | 40 - 42     |
|                                          |                       |                           |         | y (Transversal) | -12.25       | -24.88       | -47.63                |                     | 32.12        | T4       | 5.8, -13.8, 3.7  |             |
| LTE Band 48 QPSK<br>50/49<br>28 kbps     | 55990<br>3625 MHz     | 20 MHz                    | ANT3    | z (Axial)       | 2.10         | -29.71       | -49.23                | 0.89                | 36.64        | T4       | 10.4, -10.4, 3.7 | 43 - 45     |
|                                          |                       |                           |         | y (Transversal) | -6.60        | -23.01       | -49.23                |                     | 38.31        | T4       | 10.4, -16.7, 3.7 |             |
| LTE Band 66 QPSK<br>50/49<br>28 kbps     | 132322<br>1745 MHz    | 20 MHz                    | ANT1    | z (Axial)       | 0.02         | -33.46       | -48.39                | 0.77                | 37.64        | T4       | 9.2, -8.3, 3.7   | 46 - 48     |
|                                          |                       |                           |         | y (Transversal) | -10.40       | -31.71       | -47.63                |                     | 33.80        | T4       | 7.1, -16.7, 3.7  |             |
| 802.11ac<br>48 kbps                      | 6<br>2437 MHz         | 20 MHz<br>(MCS8 78 Mbps)  | ANT2    | z (Axial)       | -0.05        | -34.74       | -49.34                | 0.97                | 38.74        | T4       | 8.8, -12.1, 3.7  | 49 - 51     |
|                                          |                       |                           |         | y (Transversal) | -7.39        | -35.09       | -49.20                |                     | 37.60        | T4       | 8.8, -16.3, 3.7  |             |
| 802.11ac 80 MHz<br>48 kbps               | 42<br>5210 MHz        | 80 MHz<br>(MCS5 108 Mbps) | ANT4    | z (Axial)       | 0.80         | -29.11       | -49.34                | 1.01                | 30.35        | T4       | 8.8, -8.8, 3.7   | 52 - 54     |
|                                          |                       |                           |         | y (Transversal) | -7.71        | -34.24       | -49.20                |                     | 36.80        | T4       | 8.8, -0.4, 3.7   |             |
|                                          | 58<br>5290 MHz        | 80 MHz<br>(MCS5 108 Mbps) | ANT4    | z (Axial)       | 2.10         | -36.36       | -49.87                | 0.85                | 40.62        | T4       | 12.1, -10.8, 3.7 | 55 - 57     |
|                                          |                       |                           |         | y (Transversal) | -5.45        | -39.04       | -49.84                |                     | 39.26        | T4       | 10.4, -17.1, 3.7 |             |
|                                          | 106<br>5530 MHz       | 80 MHz<br>(MCS5 108 Mbps) | ANT4    | z (Axial)       | 2.34         | -35.93       | -49.87                | 0.95                | 40.85        | T4       | 12.1, -10.4, 3.7 | 58 - 60     |
|                                          |                       |                           |         | y (Transversal) | -5.28        | -38.97       | -49.84                |                     | 39.57        | T4       | 12.5, -17.1, 3.7 |             |
|                                          | 155<br>5775 MHz       | 80 MHz<br>(MCS5 108 Mbps) | ANT4    | z (Axial)       | 2.46         | -35.03       | -49.87                | 0.97                | 40.12        | T4       | 11.3, -10, 3.7   | 61 - 63     |
|                                          |                       |                           |         | y (Transversal) | -8.31        | -36.38       | -49.84                |                     | 39.20        | T4       | 12.5, -2.5, 3.7  |             |

### Note:

The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19

### 10.3. Worst Case T-Coil Test Plot

Test Laboratory: UL Verification Services Inc. SAR Lab 8

Date: 6/8/2019

#### 802.11ac VHT80 (5 GHz)

Communication System: UID 0, @IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5210 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2019
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1540; Calibrated: 2/18/2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

#### T-Coil scan (scan for ANSI C63.19 2011 compliance)/MCS5 108 Mbps ch. 42 ANT 4/z

**(axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.18

Measure Window Start: 500ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 30.35 dB


ABM1 comp = 0.80 dBA/m

BWC Factor = 0.16 dB

Location: 8.8, -8.8, 3.7 mm

ABM2 = -29.11 dBA/m

Location: 16.7, -4.2, 3.7 mm

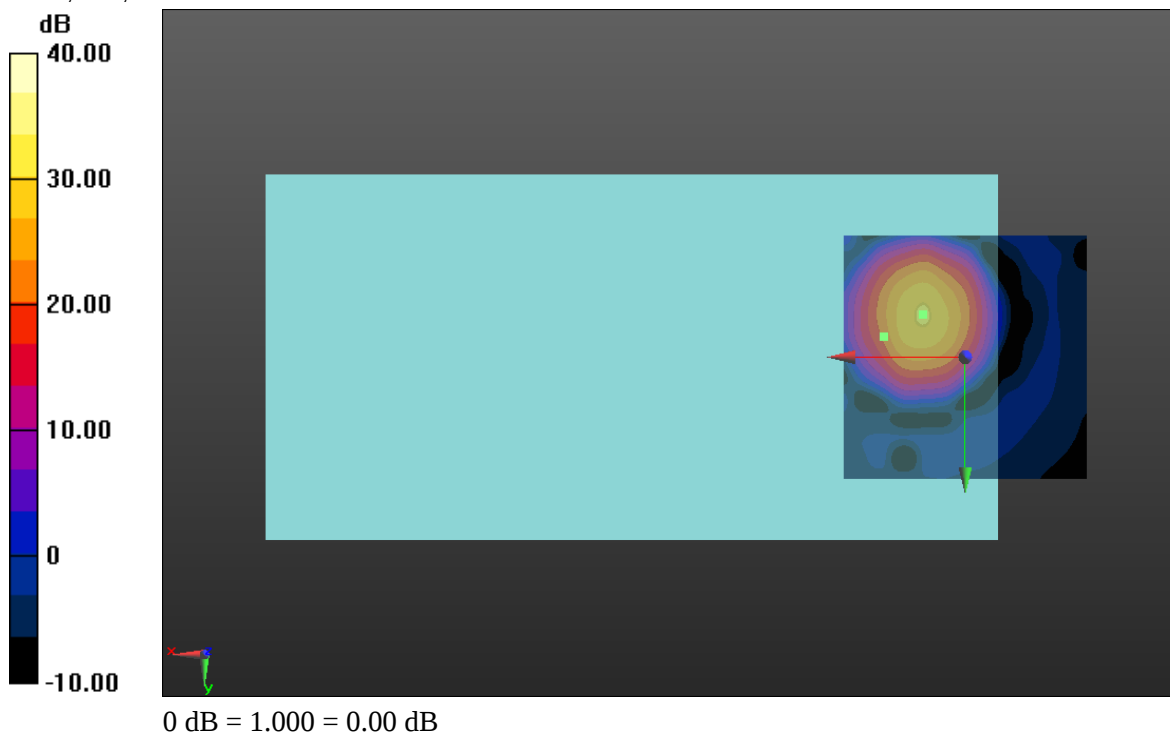

## **Appendix**

**Refer to separated files for the following appendixes**

**Appendix A: T-Coil Setup Photo**

**Appendix B: T-Coil Test Plots**

**Appendix C: T-Coil Test Plots (OTT)**

**Appendix D: T-Coil Probe Certificates**

**Appendix E: Adjusted Gain Procedure**

**END OF REPORT**