


VERTICAL RESULT

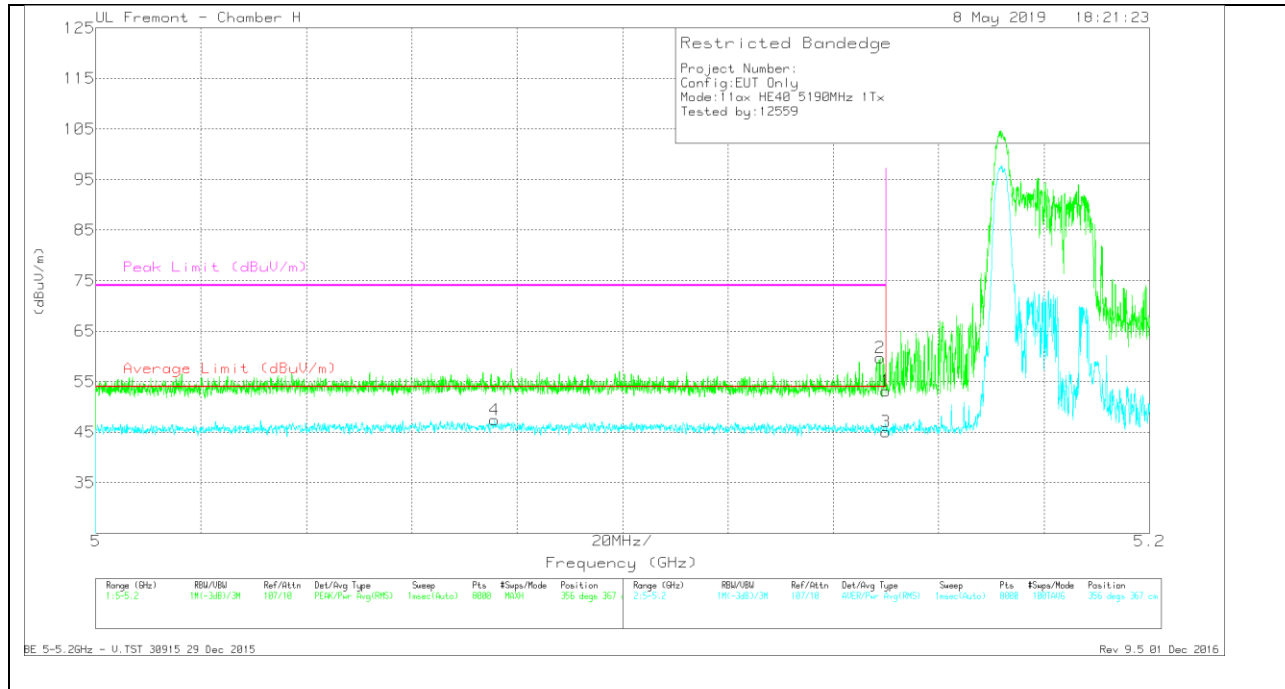


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	39.63	Pk	34.4	-20.9	53.13	-	-	74	-20.87	356	367	V
2	* 5.149	46.33	Pk	34.4	-21	59.73	-	-	74	-14.27	356	367	V
3	* 5.15	31.55	RMS	34.4	-20.9	45.05	54	-8.95	-	-	356	367	V
4	* 5.076	33.93	RMS	34.4	-20.9	47.43	54	-6.57	-	-	356	367	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

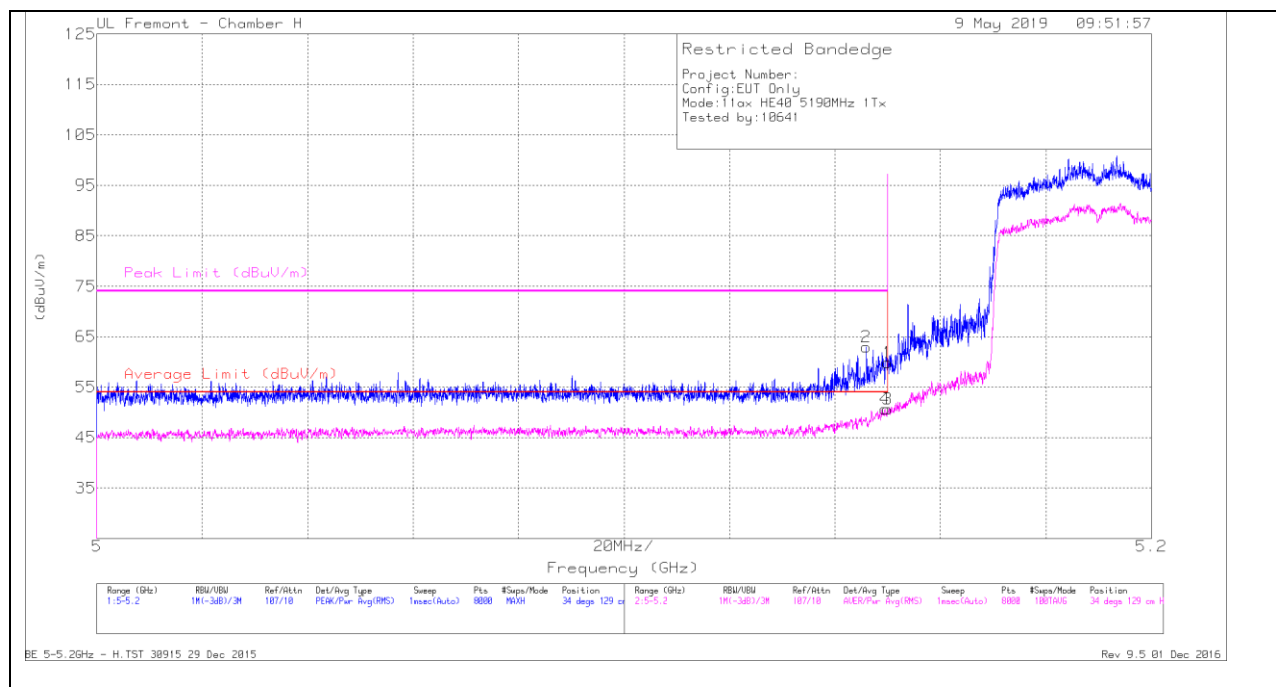1TX Antenna 5 MODE – 484 Tones, RU Index 65**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	46.3	Pk	34.4	-20.9	59.8	-	-	74	-14.2	34	129	H
2	* 5.146	49.6	Pk	34.4	-21	63	-	-	74	-11	34	129	H
3	* 5.15	37.11	RMS	34.4	-20.9	50.61	54	-3.39	-	-	34	129	H
4	* 5.149	37.21	RMS	34.4	-21	50.61	54	-3.39	-	-	34	129	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

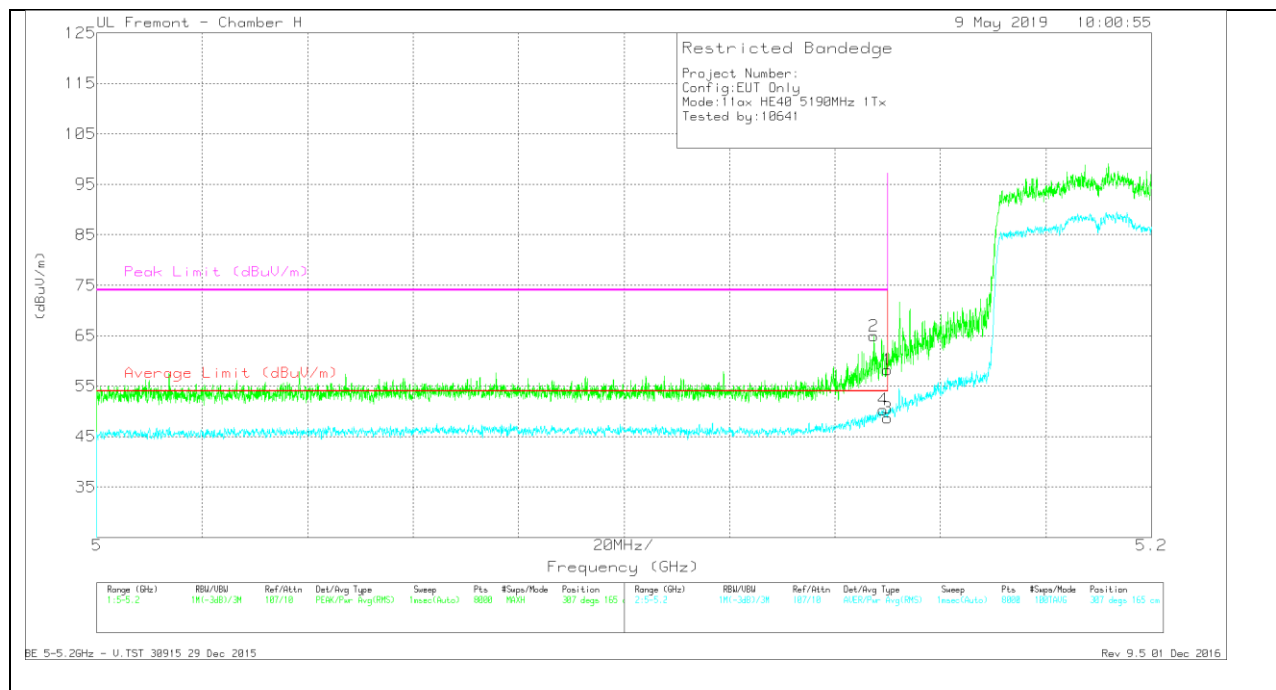


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	44.77	Pk	34.4	-20.9	58.27	-	-	74	-15.73	307	165	V
2	* 5.147	51.53	Pk	34.4	-21	64.93	-	-	74	-9.07	307	165	V
3	* 5.15	35.17	RMS	34.4	-20.9	48.67	54	-5.33	-	-	307	165	V
4	* 5.149	36.95	RMS	34.4	-21	50.35	54	-3.65	-	-	307	165	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

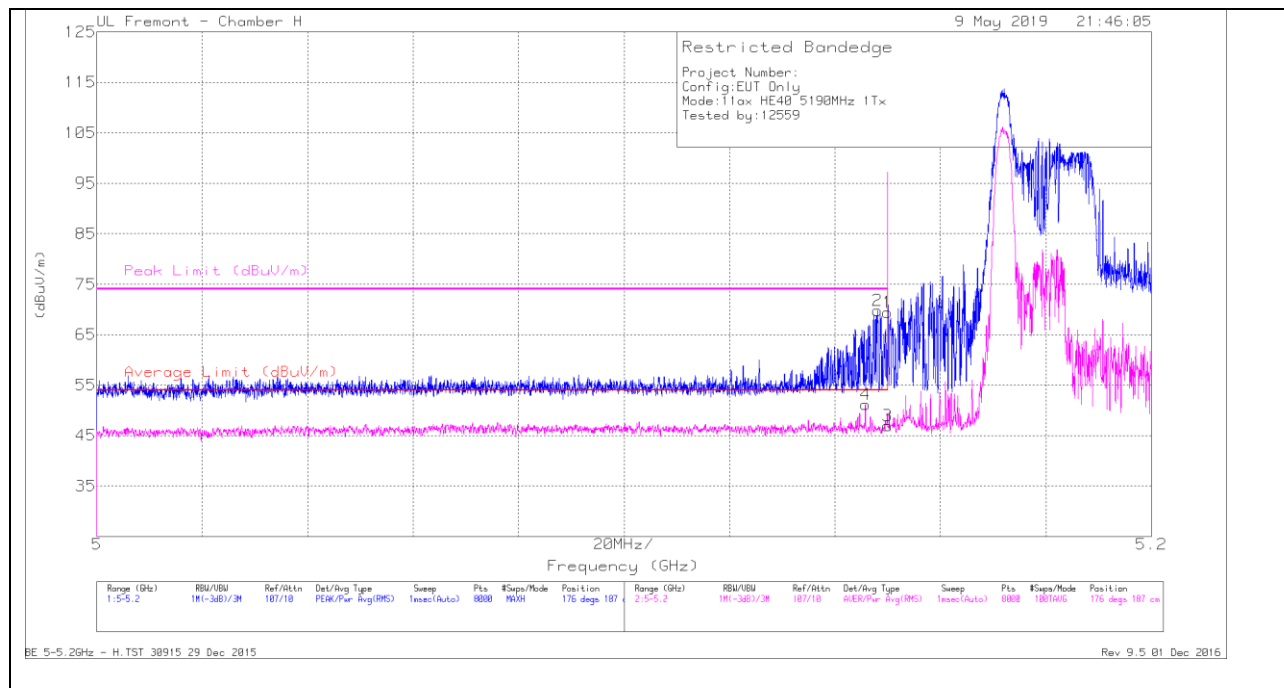1TX Antenna 5 MODE – 26 Tones, RU Index 0**BANDEGE (LOW CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 5.146	37.78	RMS	34.4	-21	51.18	54	-2.82	-	-	176	187	H
2	* 5.148	56.43	PK	34.4	-21	69.83	-	-	74	-4.17	176	187	H
1	* 5.15	55.92	PK	34.4	-20.9	69.42	-	-	74	-4.58	176	187	H
3	* 5.15	33.46	RMS	34.4	-20.9	46.96	54	-7.04	-	-	176	187	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

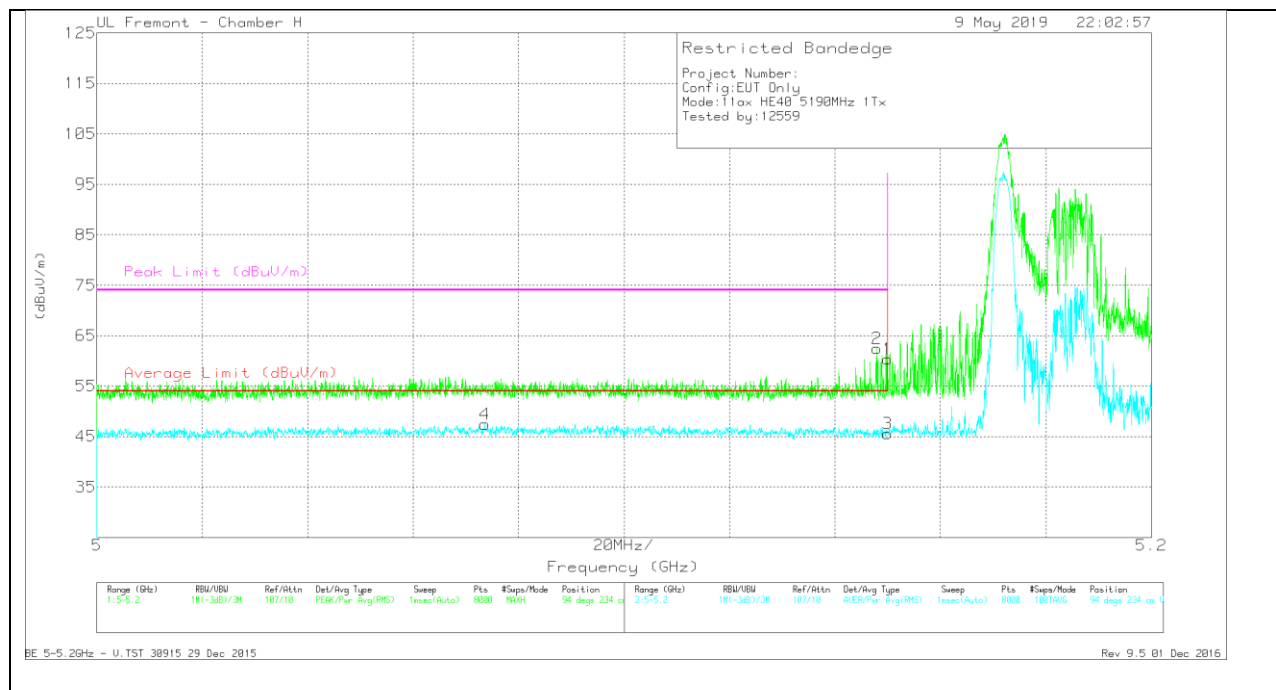


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 5.074	33.98	RMS	34.3	-20.9	47.38	54	-6.62	-	-	94	234	V
2	* 5.148	49.06	Pk	34.4	-21	62.46	-	-	74	-11.54	94	234	V
1	* 5.15	46.86	Pk	34.4	-20.9	60.36	-	-	74	-13.64	94	234	V
3	* 5.15	32.06	RMS	34.4	-20.9	45.56	54	-8.44	-	-	94	234	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

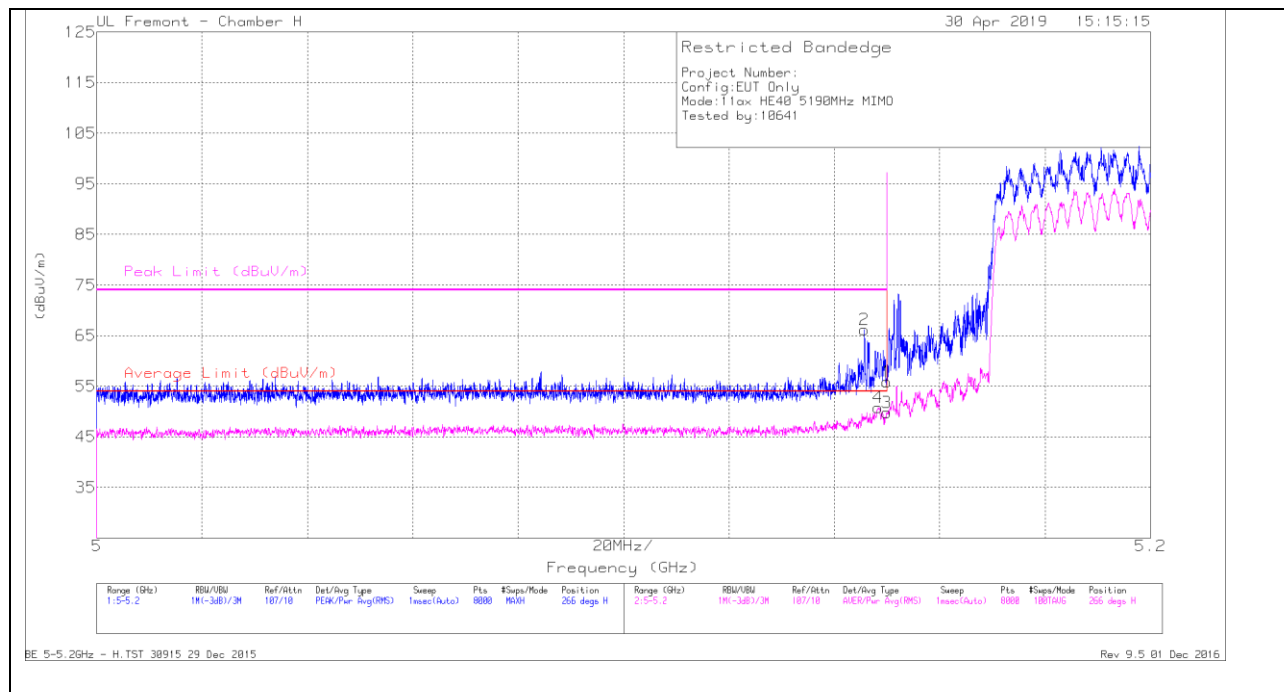BANDEDGE (LOW CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	42.39	Pk	34.4	-20.9	55.89	-	-	74	-18.11	266	258	H
2	* 5.146	52.76	Pk	34.4	-21	66.16	-	-	74	-7.84	266	258	H
3	* 5.15	36.26	RMS	34.4	-20.9	49.76	54	-4.24	-	-	266	258	H
4	* 5.148	37.34	RMS	34.4	-21	50.74	54	-3.26	-	-	266	258	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


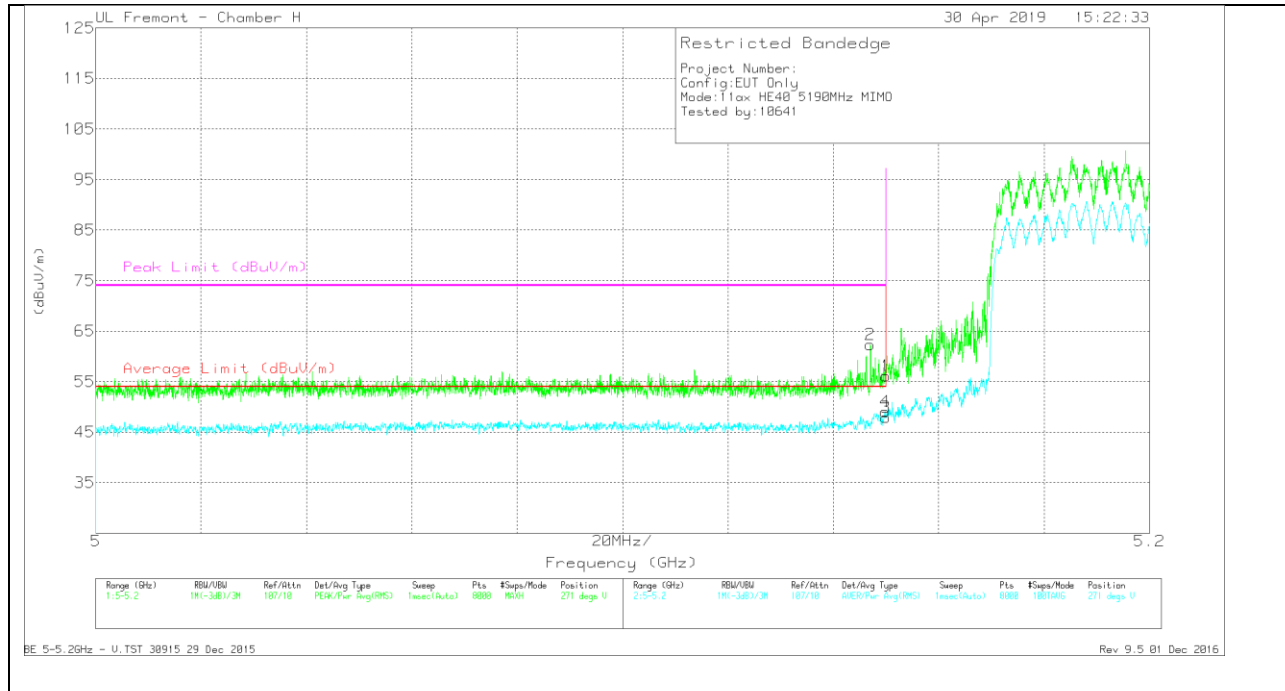


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	42.68	Pk	34.4	-20.9	56.18	-	-	74	-17.82	271	253	V
2	* 5.147	48.94	Pk	34.4	-21	62.34	-	-	74	-11.66	271	253	V
3	* 5.15	34.45	RMS	34.4	-20.9	47.95	54	-6.05	-	-	271	253	V
4	* 5.15	35.57	RMS	34.4	-20.9	49.07	54	-4.93	-	-	271	253	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

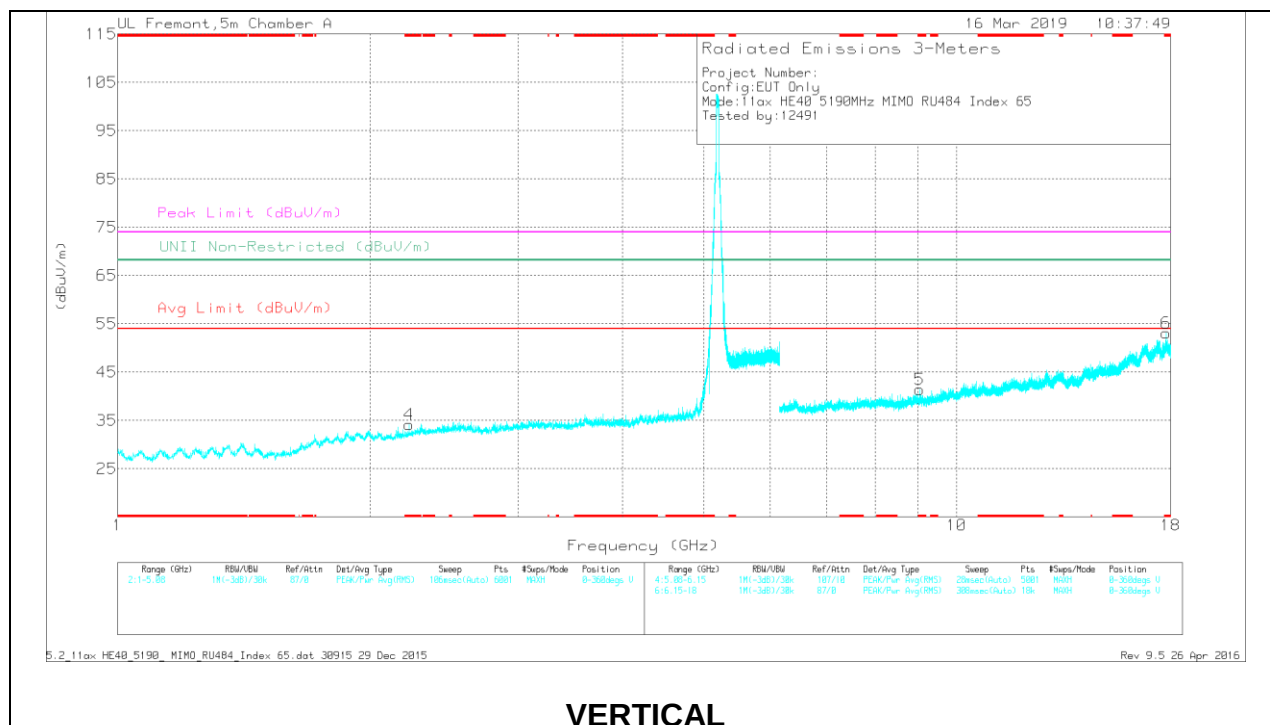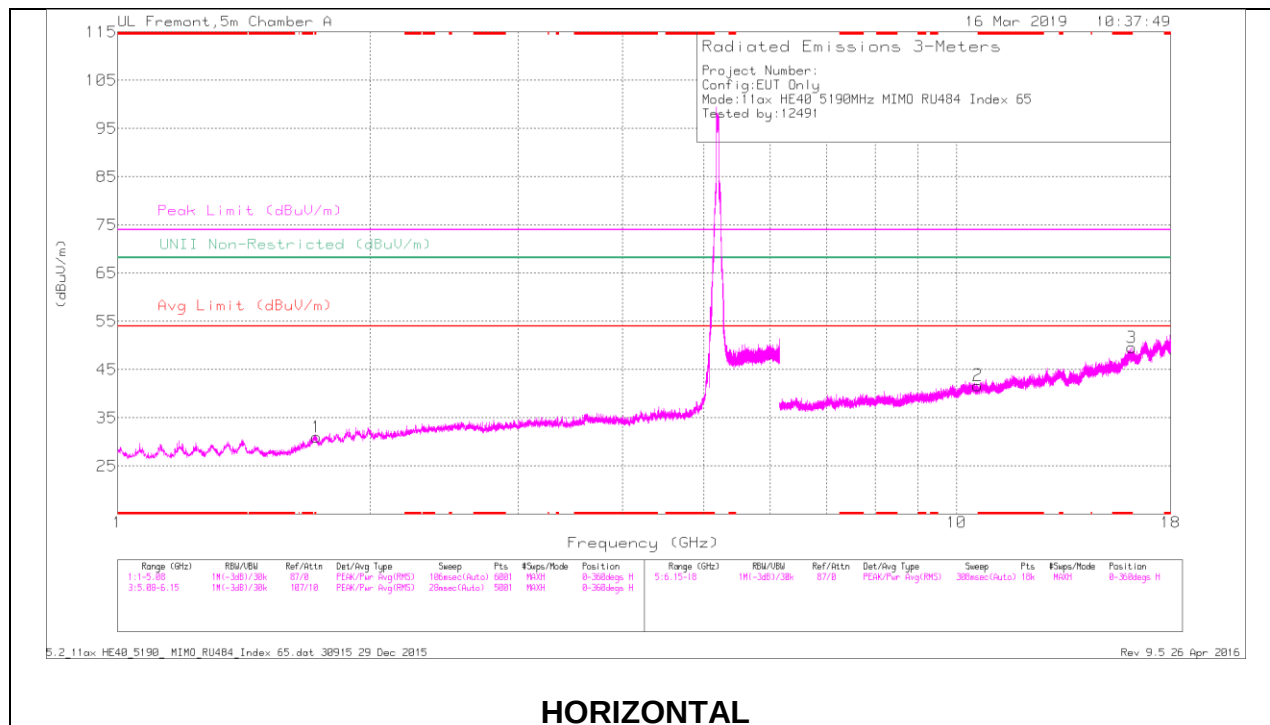HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.225	40.26	PK-U	31.6	-31.6	40.26	-	-	74	-33.74	-	-	182	130	V
	* 2.227	28.31	ADR	31.6	-31.5	28.41	54	-25.59	-	-	-	-	182	130	V
2	* 10.615	33.86	PK-U	37.8	-21.9	49.76	-	-	74	-24.24	-	-	35	154	H
	* 10.613	20.83	ADR	37.8	-21.9	36.73	54	-17.27	-	-	-	-	35	154	H
3	* 16.184	32.72	PK-U	43	-18.5	57.22	-	-	74	-16.78	-	-	73	201	H
	* 16.187	18.14	ADR	43	-18.5	42.64	54	-11.36	-	-	-	-	73	201	H
5	* 9.044	34.76	PK-U	36.8	-23.8	47.76	-	-	74	-26.24	-	-	168	340	V
	* 9.046	22.37	ADR	36.8	-23.8	35.37	54	-18.63	-	-	-	-	168	340	V
6	* 17.779	32.57	PK-U	44.4	-17.5	59.47	-	-	74	-14.53	-	-	178	136	V
	* 17.778	18.66	ADR	44.4	-17.5	45.56	54	-8.44	-	-	-	-	178	136	V
1	1.725	40.44	PK-U	29.9	-31.8	38.54	-	-	-	-	68.2	-29.66	250	178	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

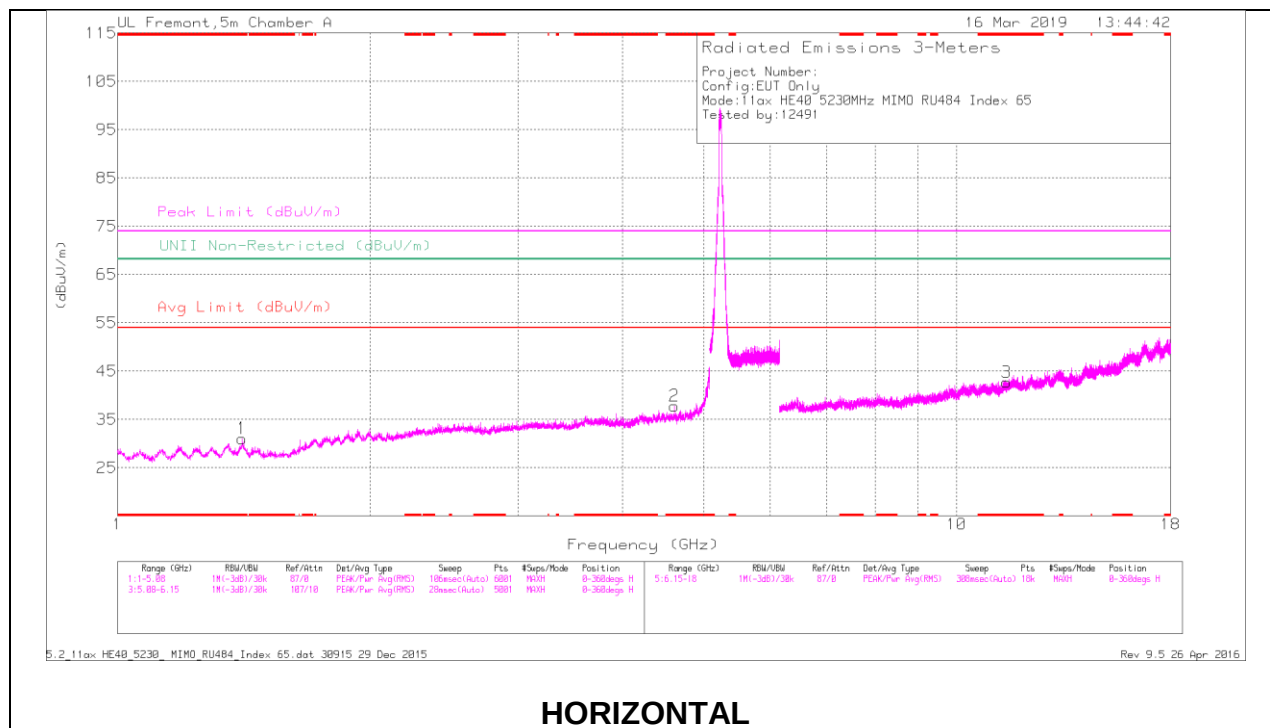

HORIZONTAL

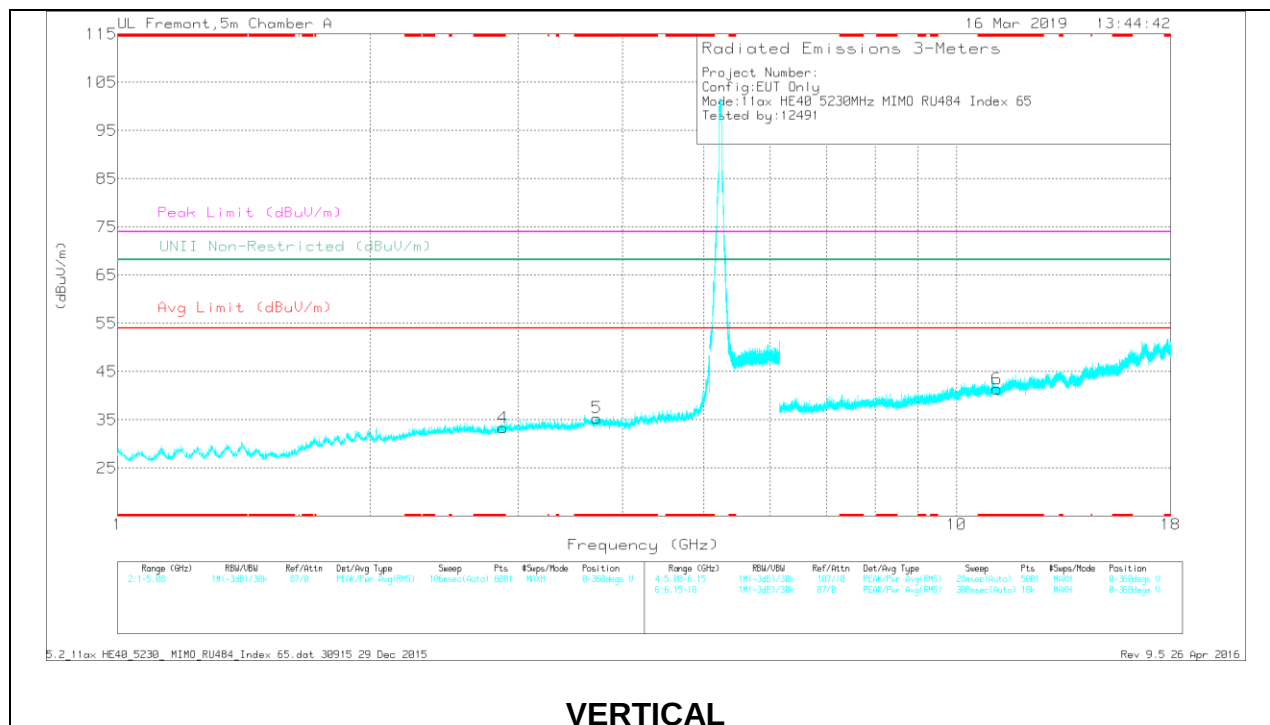

VERTICAL


Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.409	42.48	PK-U	28.4	-32.2	38.68	-	-	74	-35.32	-	-	342	212	H
	* 1.409	29.88	ADR	28.4	-32.2	26.08	54	-27.92	-	-	-	-	342	212	H
2	* 4.612	38.55	PK-U	34.1	-28.4	44.25	-	-	74	-29.75	-	-	40	190	H
	* 4.61	26.6	ADR	34.1	-28.5	32.2	54	-21.8	-	-	-	-	40	190	H
4	* 2.88	38.71	PK-U	32.6	-30.3	41.01	-	-	74	-32.99	-	-	155	186	V
	* 2.88	27.2	ADR	32.6	-30.3	29.5	54	-24.5	-	-	-	-	155	186	V
5	* 3.724	39.21	PK-U	33.3	-29.6	42.91	-	-	74	-31.09	-	-	55	206	V
	* 3.725	27.13	ADR	33.3	-29.6	30.83	54	-23.17	-	-	-	-	55	206	V
3	* 11.486	33.24	PK-U	38.4	-21.1	50.54	-	-	74	-23.46	-	-	90	270	H
	* 11.486	20.19	ADR	38.4	-21.1	37.49	54	-16.51	-	-	-	-	90	270	H
6	* 11.177	32.76	PK-U	38	-21.6	49.16	-	-	74	-24.84	-	-	234	104	V
	* 11.177	20.37	ADR	38	-21.6	36.77	54	-17.23	-	-	-	-	234	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

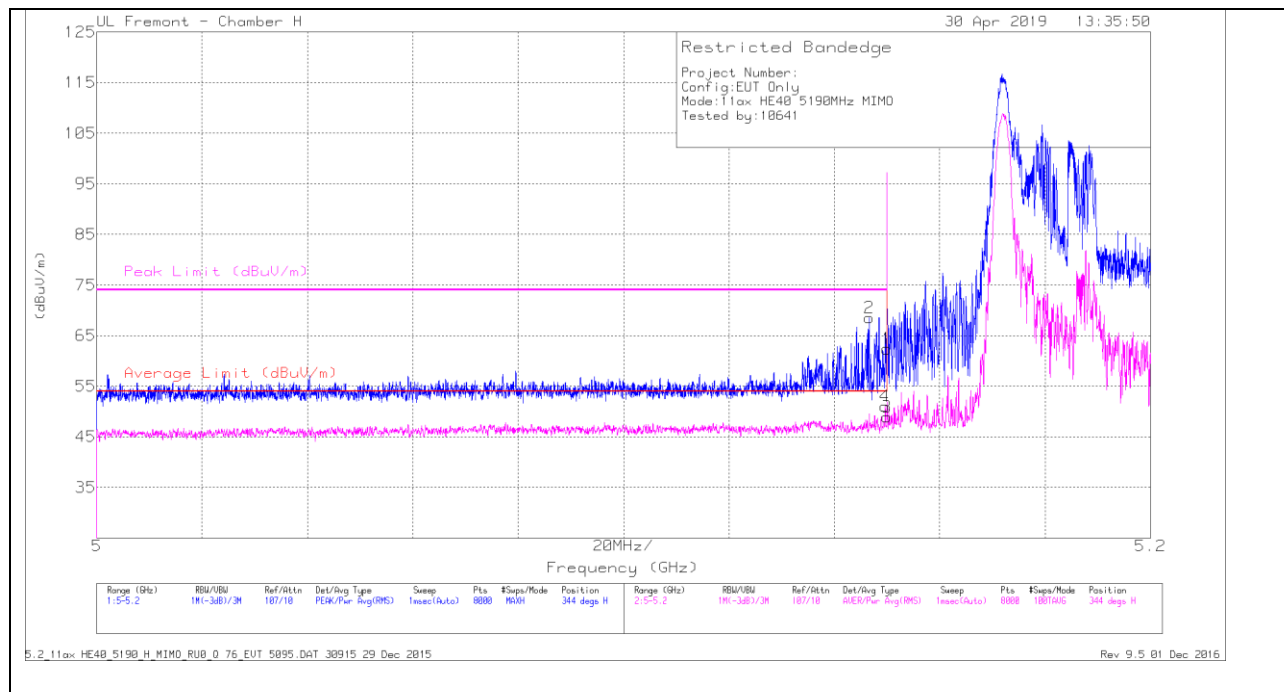BANDEGE (LOW CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	48.9	Pk	34.4	-20.9	62.4	-	-	74	-11.6	344	110	H
2	* 5.147	55.16	Pk	34.4	-21	68.56	-	-	74	-5.44	344	110	H
3	* 5.15	35.41	RMS	34.4	-20.9	48.91	54	-5.09	-	-	344	110	H
4	* 5.15	37.53	RMS	34.4	-20.9	51.03	54	-2.97	-	-	344	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


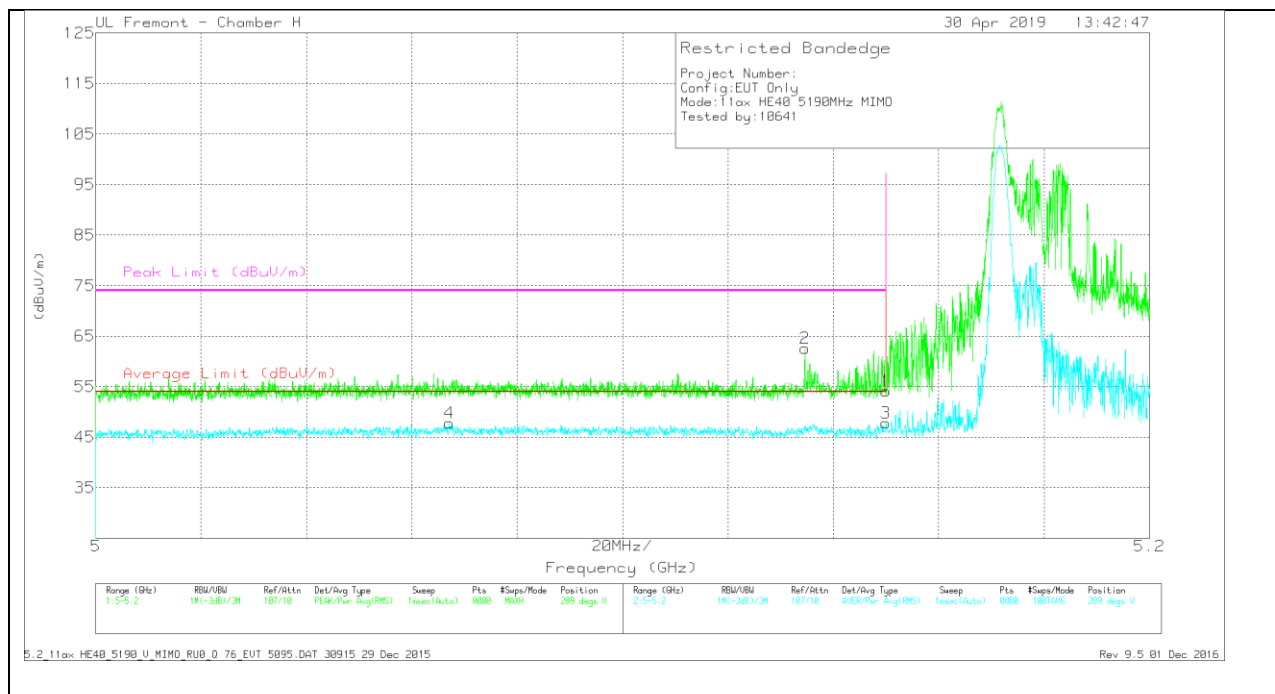


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	40.67	Pk	34.4	-20.9	54.17	-	-	74	-19.83	289	338	V
2	* 5.135	48.98	Pk	34.5	-20.9	62.58	-	-	74	-11.42	289	338	V
3	* 5.15	34.29	RMS	34.4	-20.9	47.79	54	-6.21	-	-	289	338	V
4	* 5.067	34.3	RMS	34.3	-20.8	47.8	54	-6.2	-	-	289	338	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

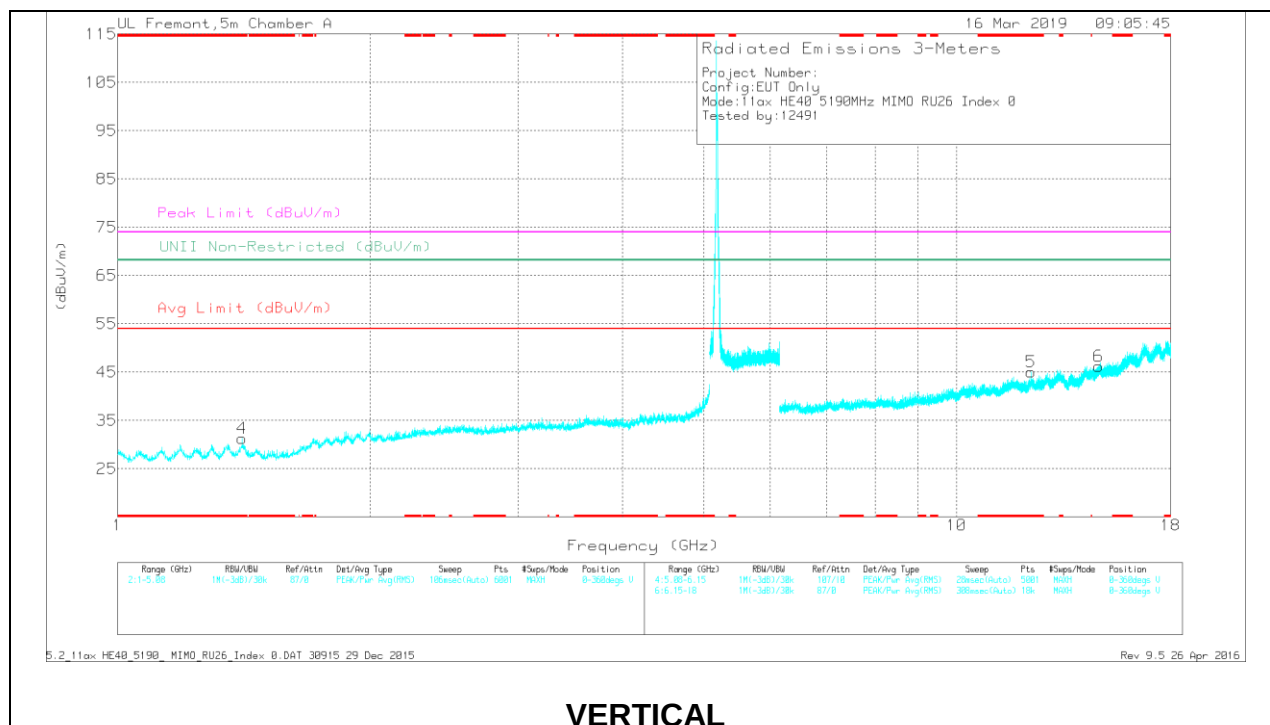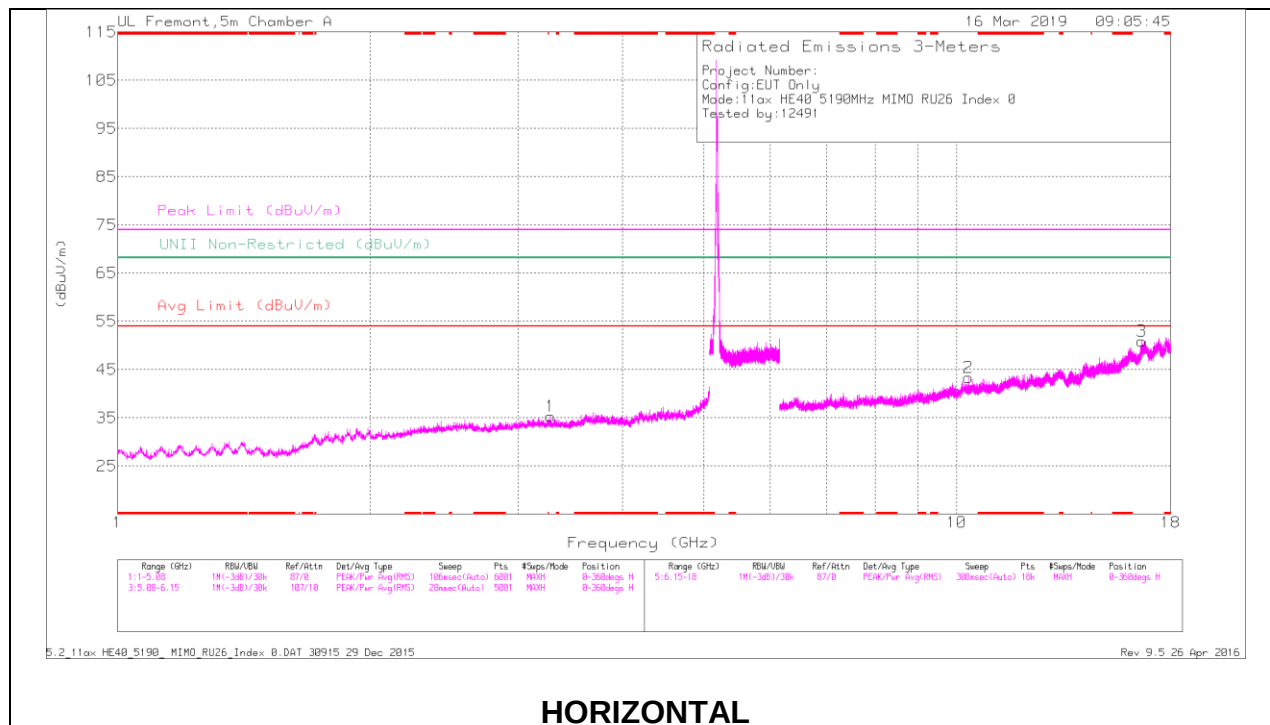HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF-T863 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 1.409	41.61	PK-U	28.4	-32.2	37.81	-	-	74	-36.19	-	-	130	202	V
	* 1.406	30.02	ADR	28.5	-32.2	26.32	54	-27.68	-	-	-	-	130	202	V
5	* 12.279	32.81	PK-U	39.1	-20.1	51.81	-	-	74	-22.19	-	-	129	185	V
	* 12.281	19.5	ADR	39.1	-20.1	38.5	54	-15.5	-	-	-	-	129	185	V
1	3.283	39.17	PK-U	32.9	-29.8	42.27	-	-	-	-	68.2	-25.93	66	167	H
2	10.345	34.18	PK-U	37.8	-22.3	49.68	-	-	-	-	68.2	-18.52	236	190	H
6	14.765	33.34	PK-U	40.9	-20	54.24	-	-	-	-	68.2	-13.96	271	155	V
3	16.627	32.2	PK-U	43.6	-17.7	58.1	-	-	-	-	68.2	-10.1	179	125	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

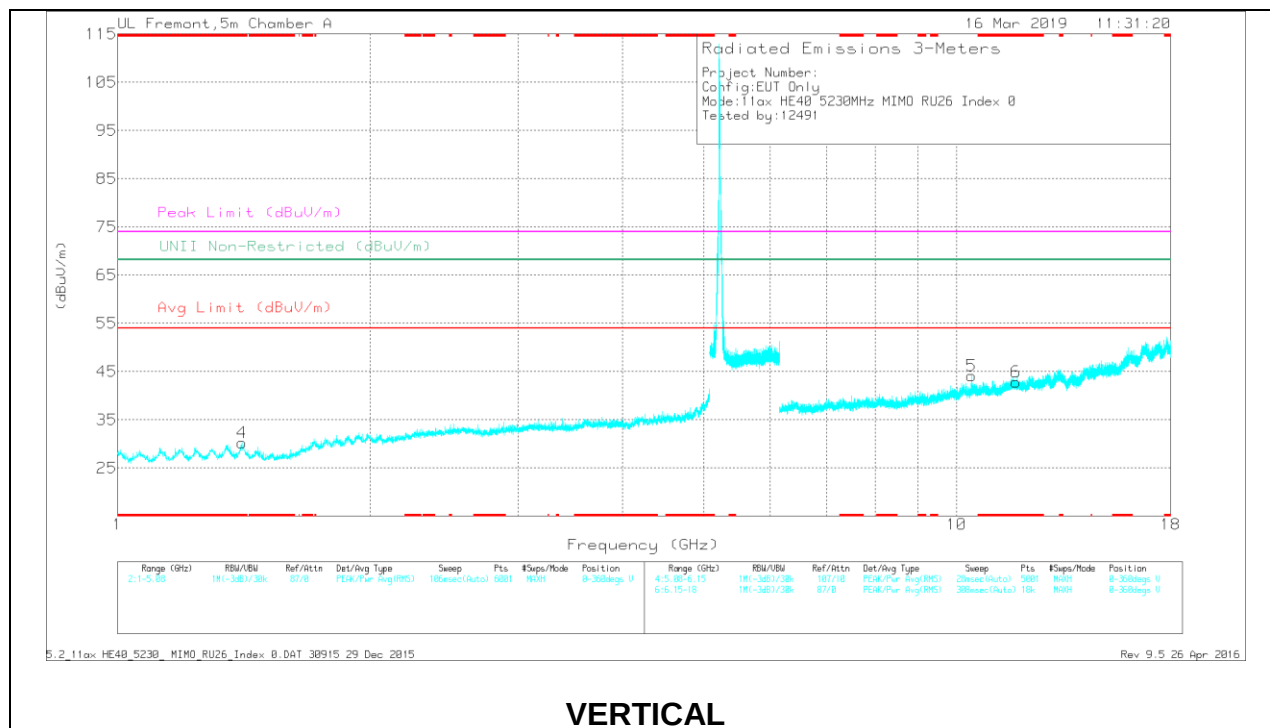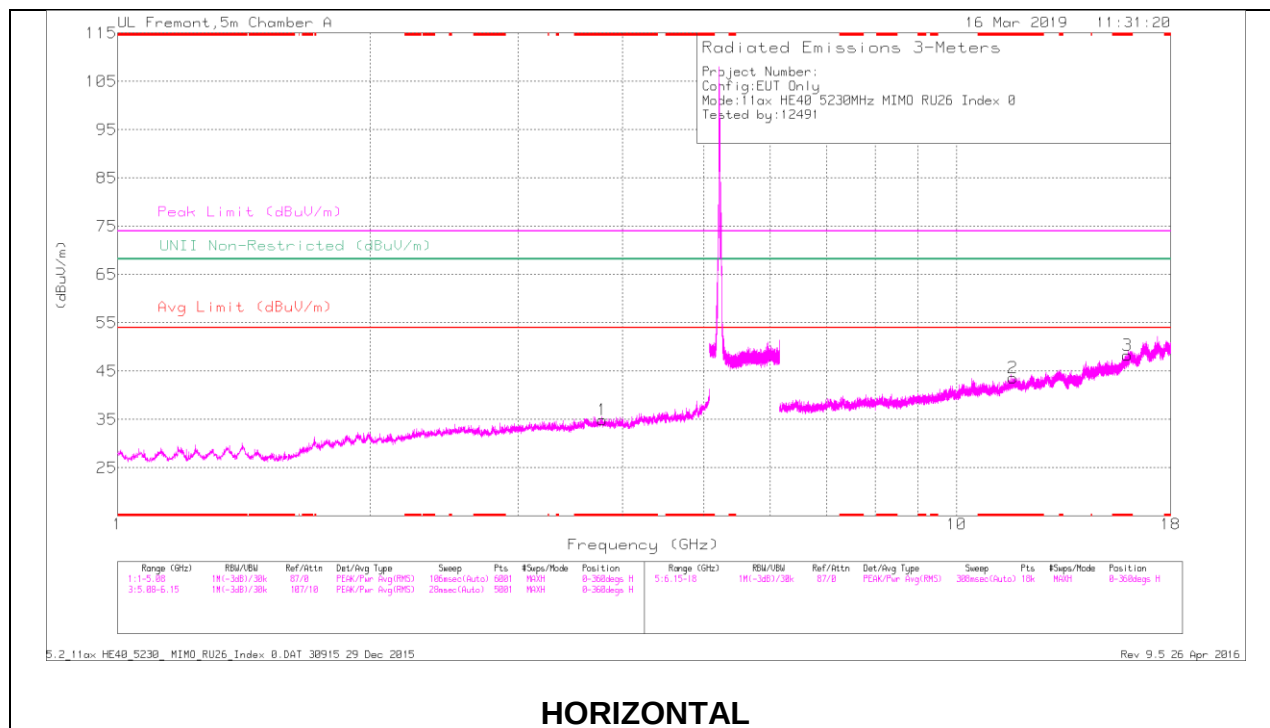


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.783	39.41	PK-U	33.4	-29.4	43.41	-	-	74	-30.59	-	-	131	247	H
	* 3.783	26.81	ADR	33.4	-29.4	30.81	54	-23.19	-	-	-	-	131	247	H
4	* 1.406	41.35	PK-U	28.5	-32.2	37.65	-	-	74	-36.35	-	-	122	334	V
	* 1.409	29.66	ADR	28.4	-32.2	25.86	54	-28.14	-	-	-	-	122	334	V
2	* 11.67	32.11	PK-U	38.9	-20.2	50.81	-	-	74	-23.19	-	-	37	180	H
	* 11.671	19.04	ADR	38.9	-20.2	37.74	54	-16.26	-	-	-	-	37	180	H
3	* 15.982	32.62	PK-U	42.4	-18.3	56.72	-	-	74	-17.28	-	-	214	139	H
	* 15.98	18.52	ADR	42.4	-18.3	42.62	54	-11.38	-	-	-	-	214	139	H
6	* 11.769	32.51	PK-U	39.1	-20.9	50.71	-	-	74	-23.29	-	-	51	238	V
	* 11.769	19.78	ADR	39.1	-20.9	37.98	54	-16.02	-	-	-	-	51	238	V
5	10.423	33.45	PK-U	37.9	-21.5	49.85	-	-	-	-	68.2	-18.35	336	184	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

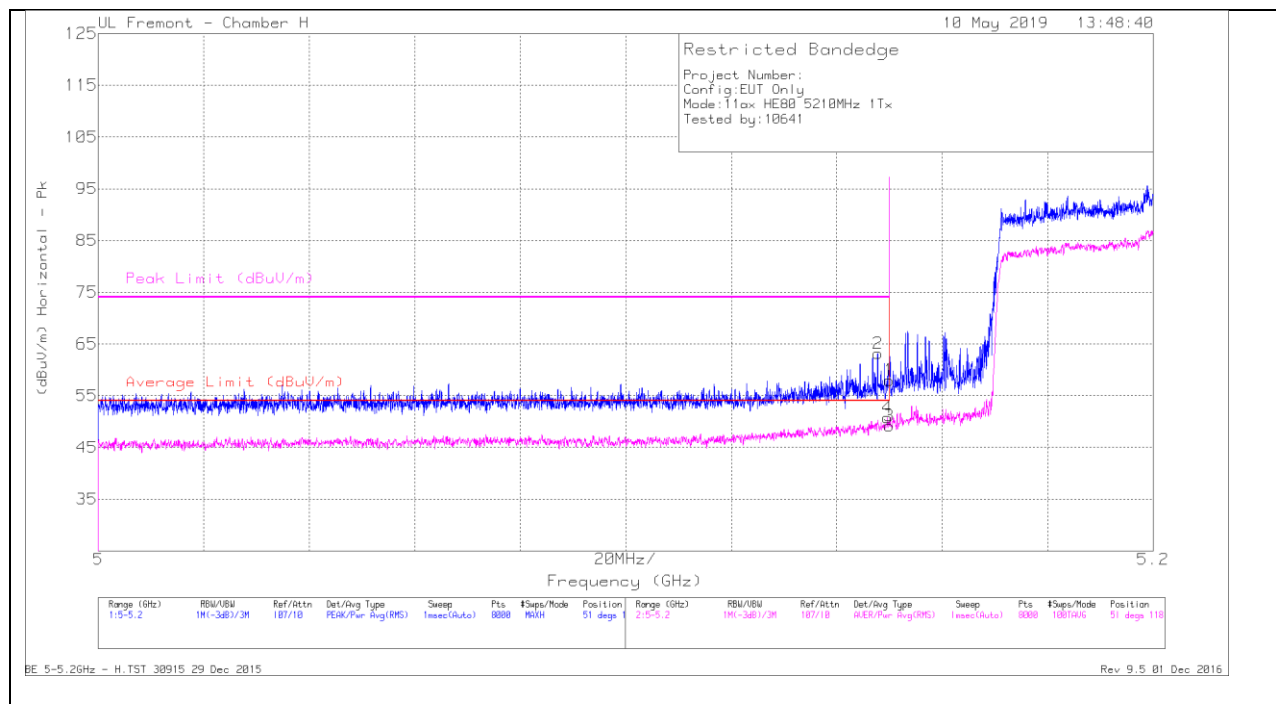1.1.6. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.2 GHz BAND**1TX Antenna 4 MODE – 996 Tones, RU Index 67****BANDEDGE (MID CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	44.5	Pk	34.4	-20.9	58	-	-	74	-16	51	118	H
2	* 5.148	49.75	Pk	34.4	-21	63.15	-	-	74	-10.85	51	118	H
3	* 5.15	35.68	RMS	34.4	-20.9	49.18	54	-4.82	-	-	51	118	H
4	* 5.15	37.24	RMS	34.4	-20.9	50.74	54	-3.26	-	-	51	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

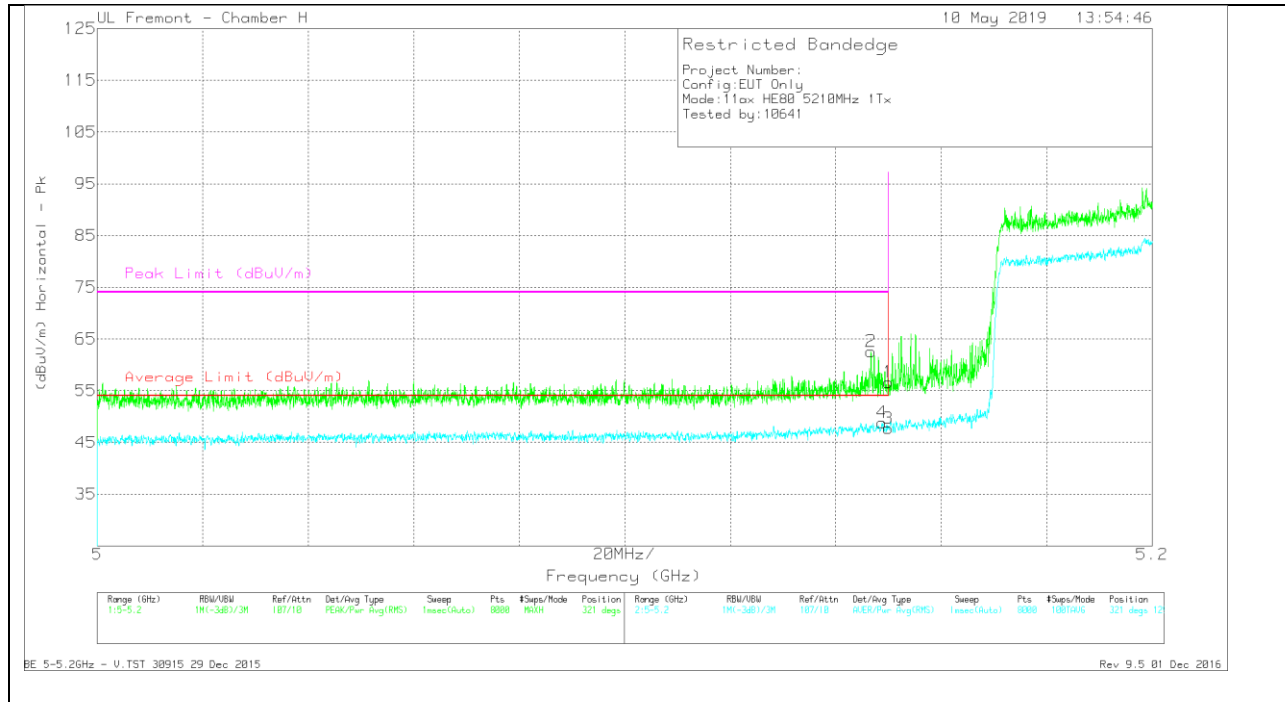


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	43.15	Pk	34.4	-20.9	56.65	-	-	74	-17.35	321	129	V
2	* 5.147	49.19	Pk	34.4	-21	62.59	-	-	74	-11.41	321	129	V
3	* 5.15	34.22	RMS	34.4	-20.9	47.72	54	-6.28	-	-	321	129	V
4	* 5.149	35.42	RMS	34.4	-21	48.82	54	-5.18	-	-	321	129	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

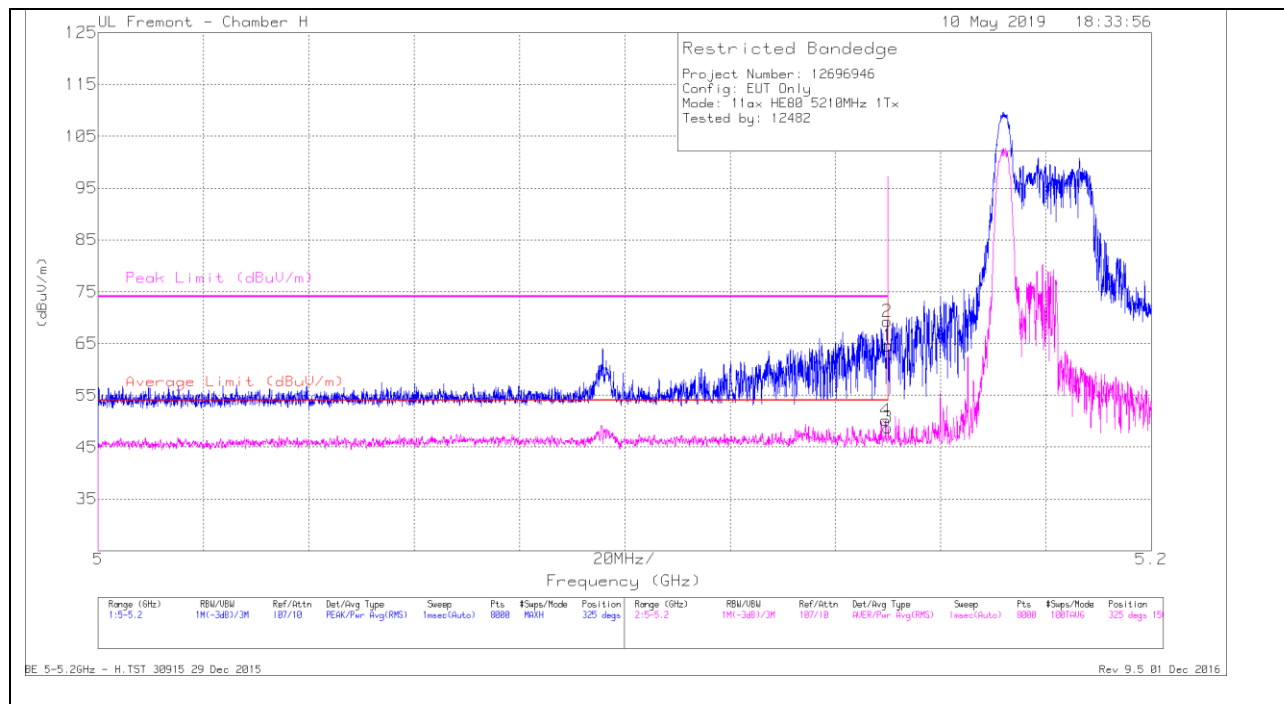1TX Antenna 4 MODE – 26 Tones, RU Index 0**BANDEDGE (MID CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	51.1	Pk	34.4	-20.9	64.6	-	-	74	-9.4	325	150	H
2	* 5.15	55.77	Pk	34.4	-20.9	69.27	-	-	74	-4.73	325	150	H
3	* 5.15	35.25	RMS	34.4	-20.9	48.75	54	-5.25	-	-	325	150	H
4	* 5.15	36.77	RMS	34.4	-21	50.17	54	-3.83	-	-	325	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

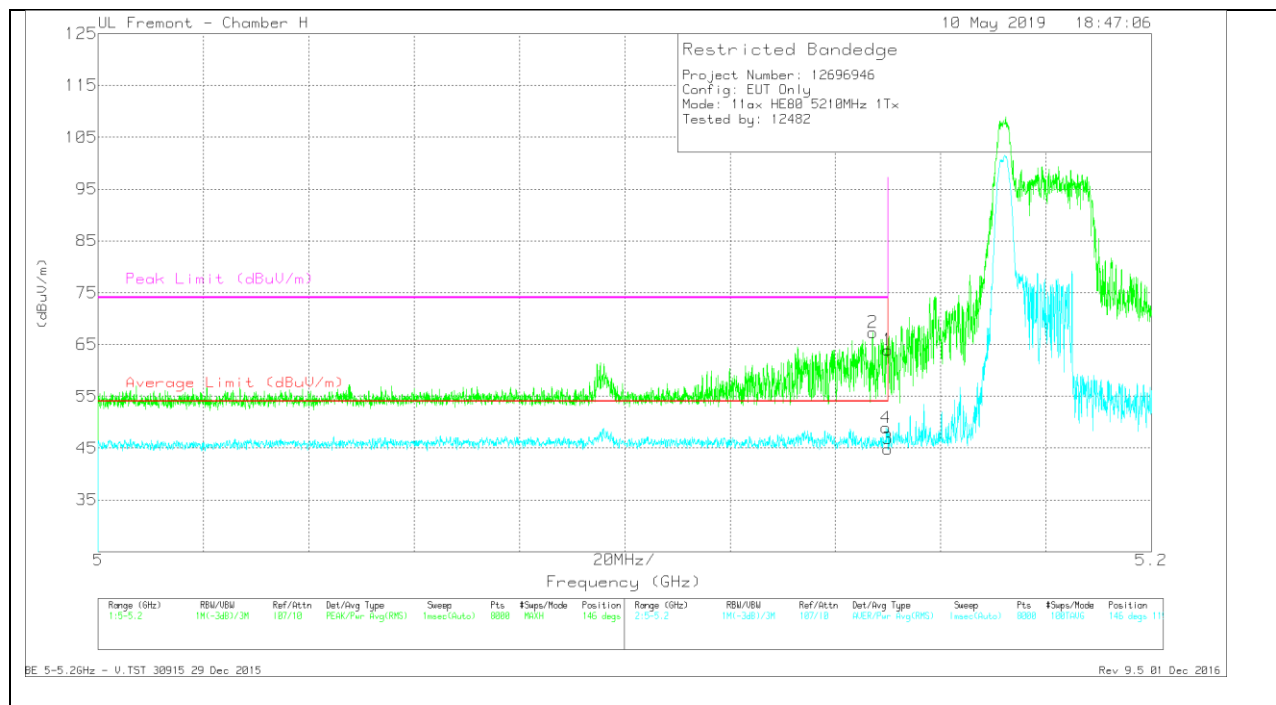

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	50.45	Pk	34.4	-20.9	63.95	-	-	74	-10.05	146	119	V
2	* 5.147	53.92	Pk	34.4	-21	67.32	-	-	74	-6.68	146	119	V
3	* 5.15	31.36	RMS	34.4	-20.9	44.86	54	-9.14	-	-	146	119	V
4	* 5.15	35.43	RMS	34.4	-20.9	48.93	54	-5.07	-	-	146	119	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

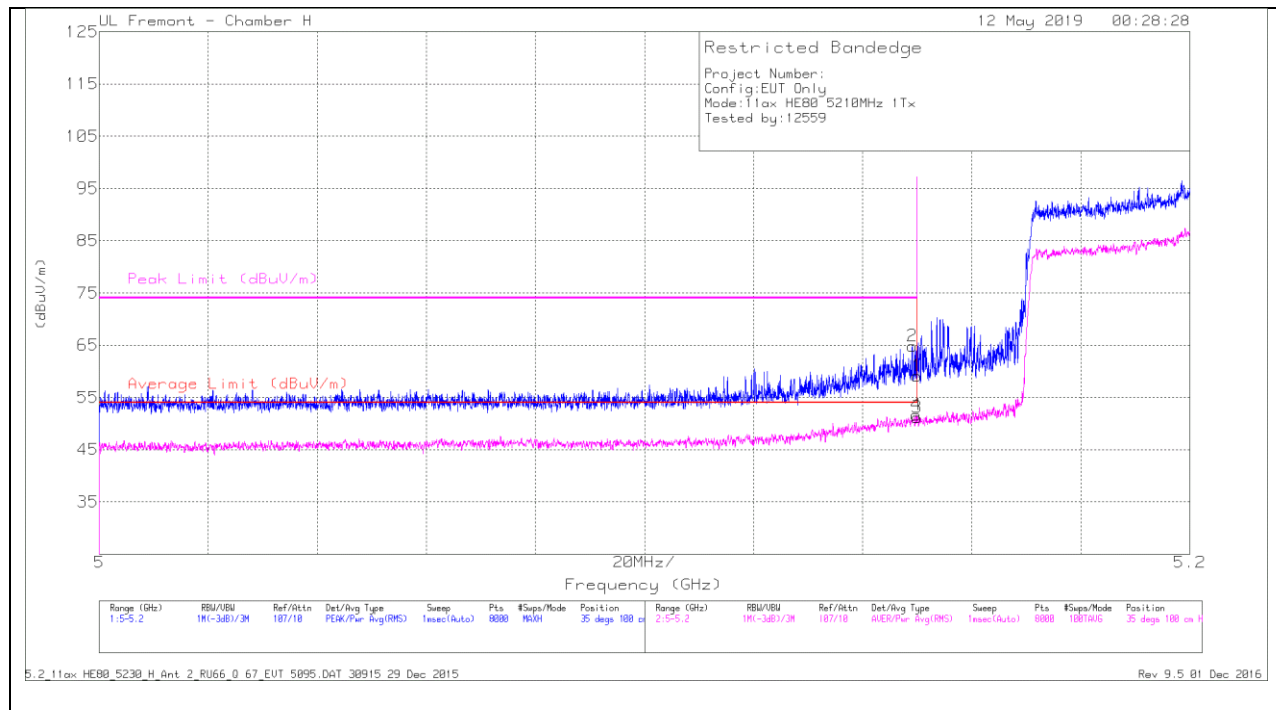

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.149	51.45	Pk	34.4	-21	64.85	-	-	74	-9.15	35	100	H
1	* 5.15	45.57	Pk	34.4	-20.9	59.07	-	-	74	-14.93	35	100	H
3	* 5.15	37.7	RMS	34.4	-20.9	51.2	54	-2.8	-	-	35	100	H
4	* 5.15	38.19	RMS	34.4	-20.9	51.69	54	-2.31	-	-	35	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

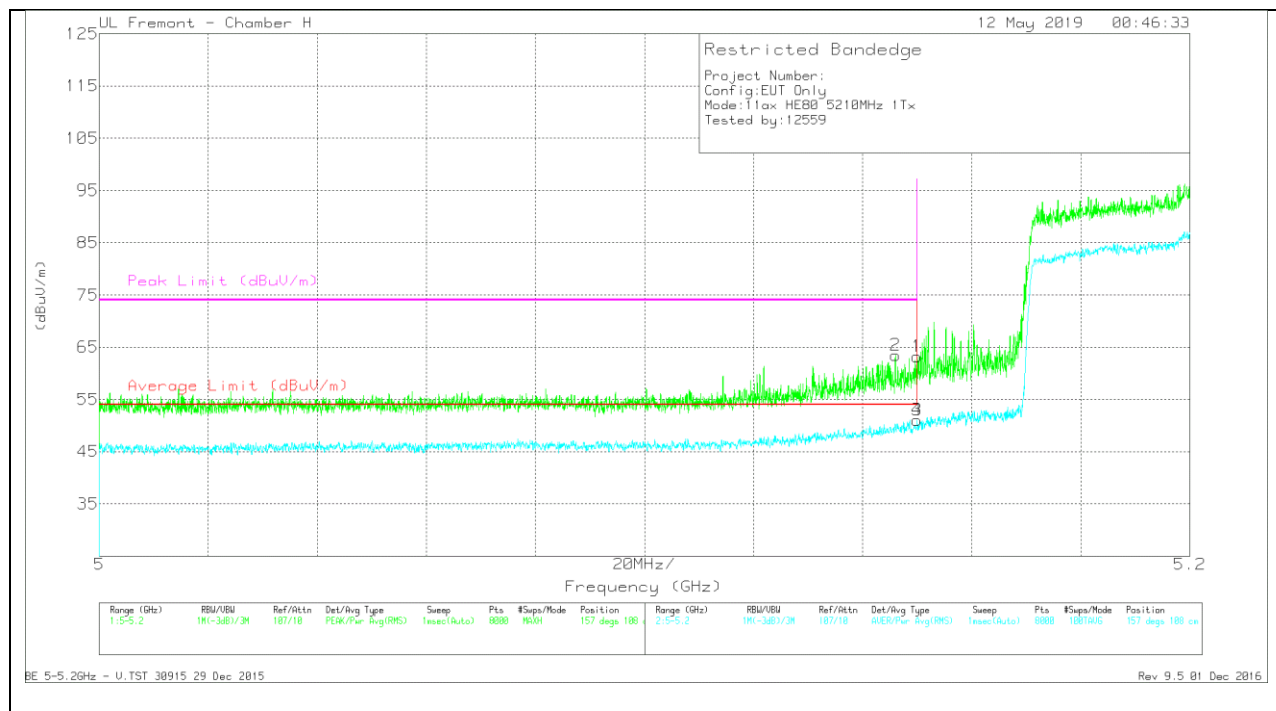


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.146	50.06	Pk	34.4	-21	63.46	-	-	74	-10.54	157	108	V
1	* 5.15	49.7	Pk	34.4	-20.9	63.2	-	-	74	-10.8	157	108	V
3	* 5.15	37.57	RMS	34.4	-20.9	51.07	54	-2.93	-	-	157	108	V
4	* 5.15	37.59	RMS	34.4	-20.9	51.09	54	-2.91	-	-	157	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

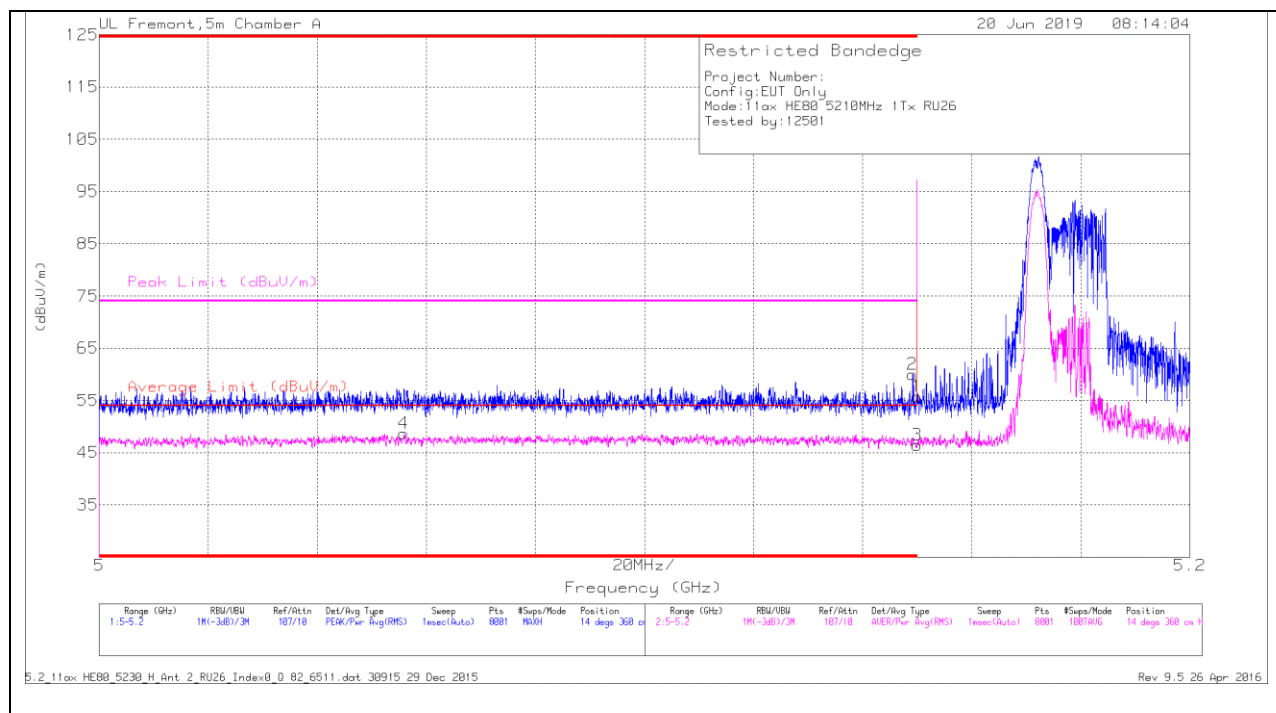1TX Antenna 5 MODE – 26 Tones, RU Index 0**BANDEDGE (MID CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.149	44.25	PK	34.5	-18.8	59.95	-	-	74	-14.05	14	360	H
4	* 5.056	33.31	RMS	34.3	-18.9	48.71	54	-5.29	-	-	14	360	H
1	5.15	40	PK	34.6	-18.8	55.8	-	-	74	-18.2	14	360	H
3	5.15	30.63	RMS	34.6	-18.8	46.43	54	-7.57	-	-	14	360	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

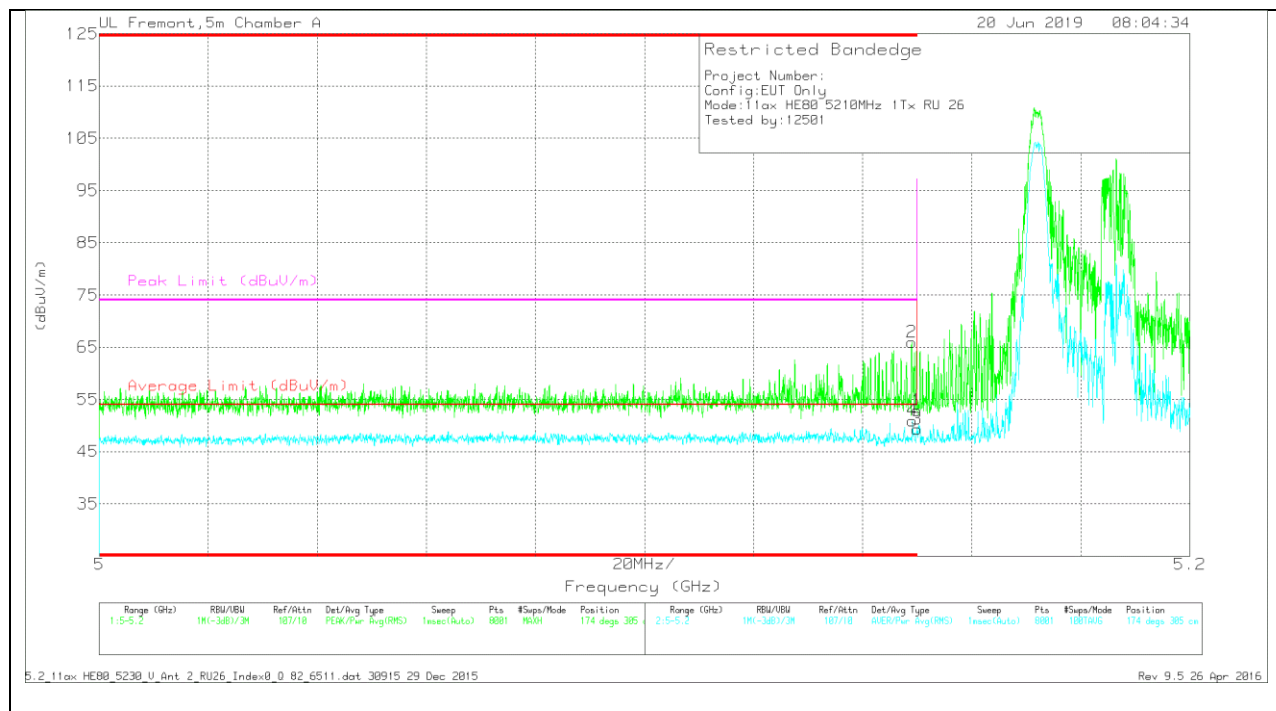


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.149	50.26	Pk	34.5	-18.8	65.96	-	-	74	-8.04	174	305	V
4	* 5.149	35.24	RMS	34.5	-18.8	50.94	54	-3.06	-	-	174	305	V
1	5.15	37.11	Pk	34.6	-18.8	52.91	-	-	74	-21.09	174	305	V
3	5.15	33.49	RMS	34.6	-18.8	49.29	54	-4.71	-	-	174	305	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

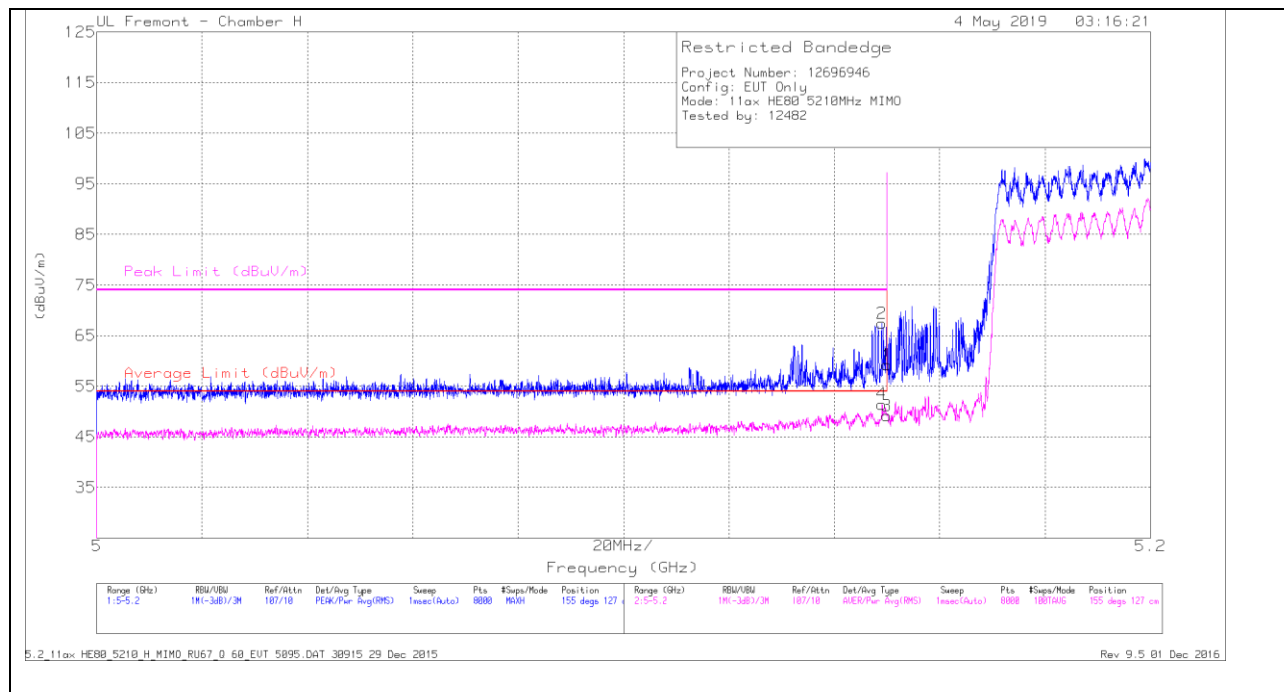BANDEDGE (MID CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	45.75	Pk	34.4	-20.9	59.25	-	-	74	-14.75	155	127	H
2	* 5.149	54.06	Pk	34.4	-21	67.46	-	-	74	-6.54	155	127	H
3	* 5.15	35.64	RMS	34.4	-20.9	49.14	54	-4.86	-	-	155	127	H
4	* 5.149	38.07	RMS	34.4	-21	51.47	54	-2.53	-	-	155	127	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

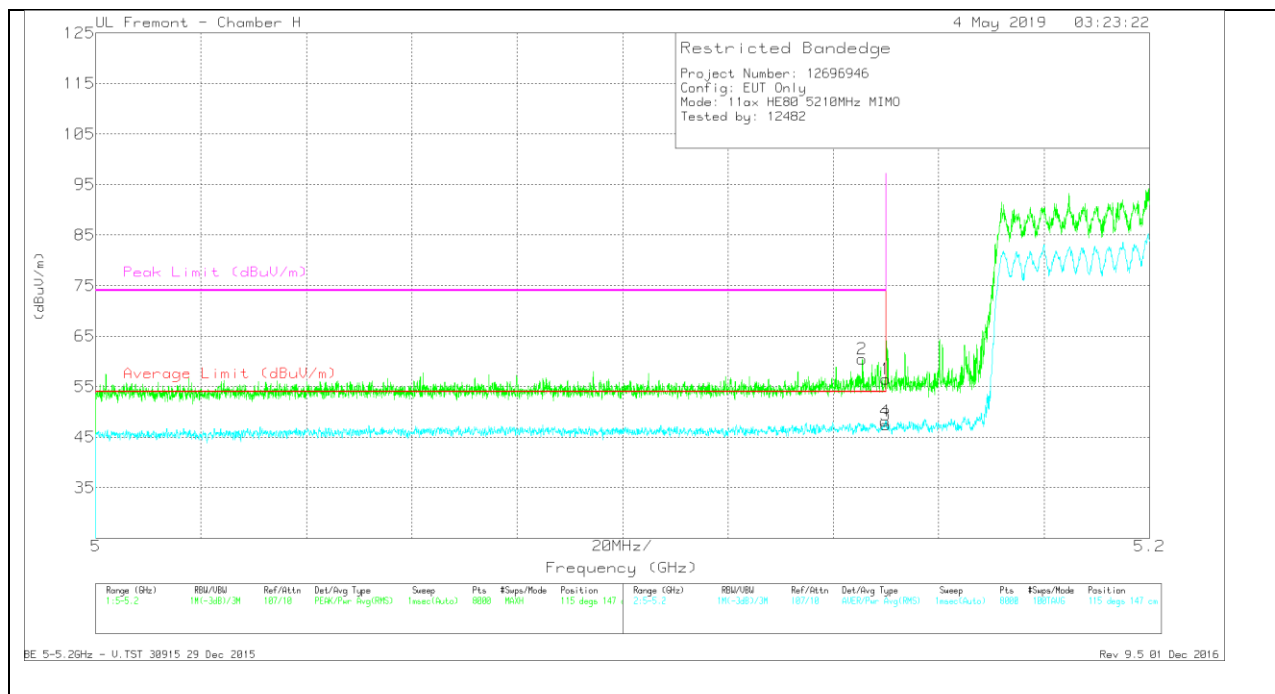

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	43.01	Pk	34.4	-20.9	56.51	-	-	74	-17.49	115	147	V
2	* 5.145	47.03	Pk	34.4	-21	60.43	-	-	74	-13.57	115	147	V
3	* 5.15	33.99	RMS	34.4	-20.9	47.49	54	-6.51	-	-	115	147	V
4	* 5.15	34.67	RMS	34.4	-20.9	48.17	54	-5.83	-	-	115	147	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

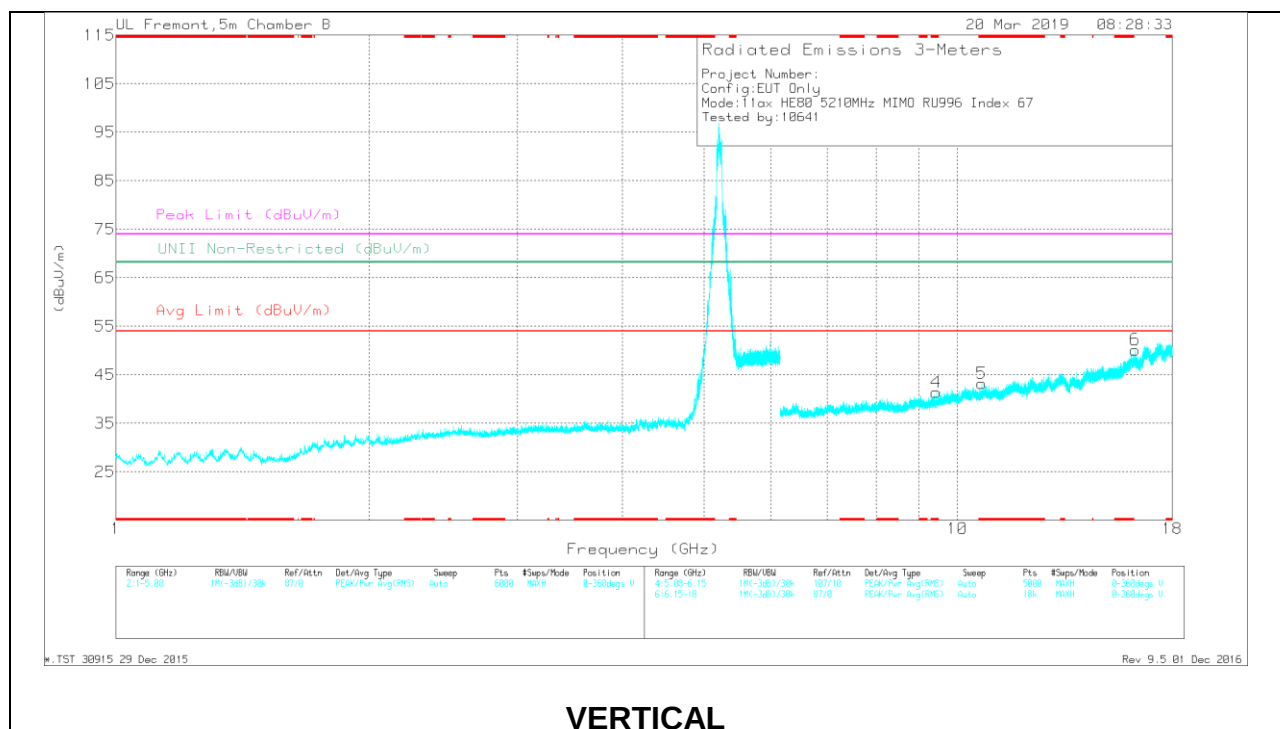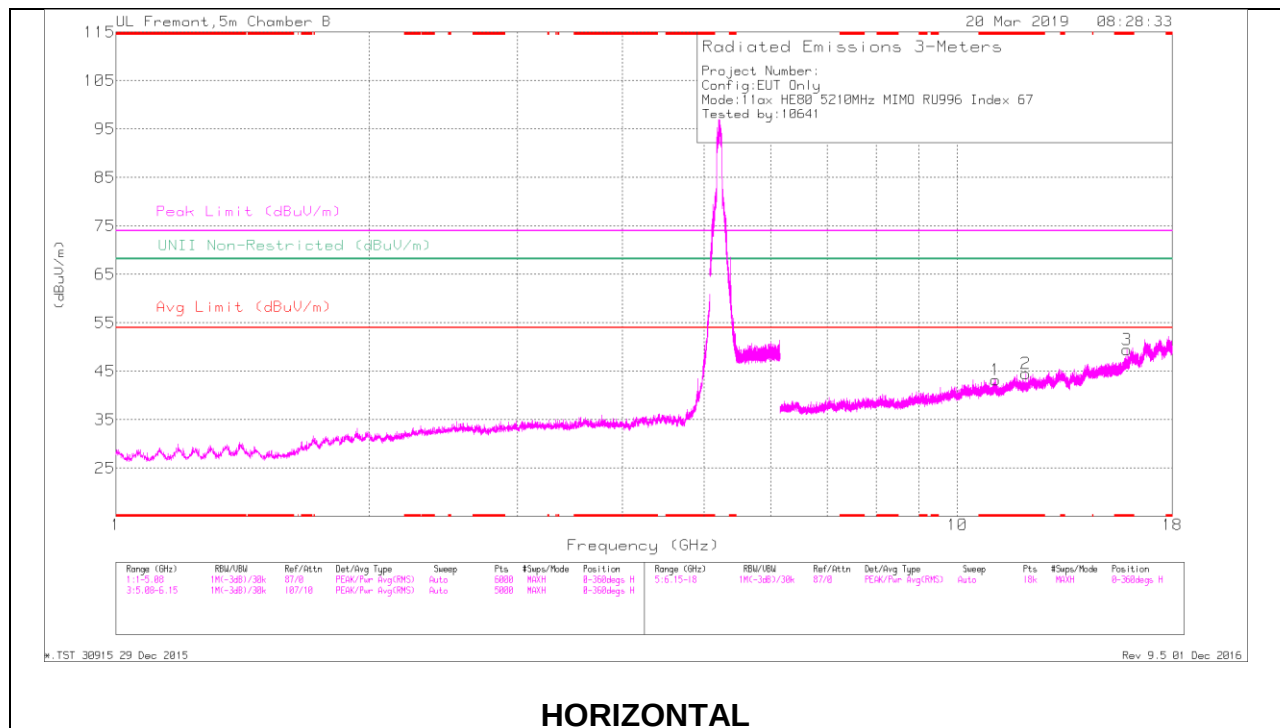


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.106	33.63	PK-U	37.8	-21	50.43	-	-	74	-23.57	-	-	307	178	H
	* 11.104	19.86	ADR	37.8	-21	36.66	54	-17.34	-	-	-	-	307	178	H
2	* 12.063	33.36	PK-U	38.9	-21	51.26	-	-	74	-22.74	-	-	278	207	H
	* 12.06	20.05	ADR	38.9	-20.9	38.05	54	-15.95	-	-	-	-	278	207	H
3	* 15.898	32.28	PK-U	42.2	-18.2	56.28	-	-	74	-17.72	-	-	253	188	H
	* 15.897	18.02	ADR	42.2	-18.1	42.12	54	-11.88	-	-	-	-	253	188	H
4	* 9.434	34.51	PK-U	36.8	-23.3	48.01	-	-	74	-25.99	-	-	220	140	V
	* 9.436	21.62	ADR	36.8	-23.3	35.12	54	-18.88	-	-	-	-	220	140	V
5	* 10.695	33.78	PK-U	37.8	-21.4	50.18	-	-	74	-23.82	-	-	242	158	V
	* 10.698	20.25	ADR	37.8	-21.4	36.65	54	-17.35	-	-	-	-	242	158	V
6	16.265	32.47	PK-U	43	-18.3	57.17	-	-	-	-	68.2	-11.03	204	194	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

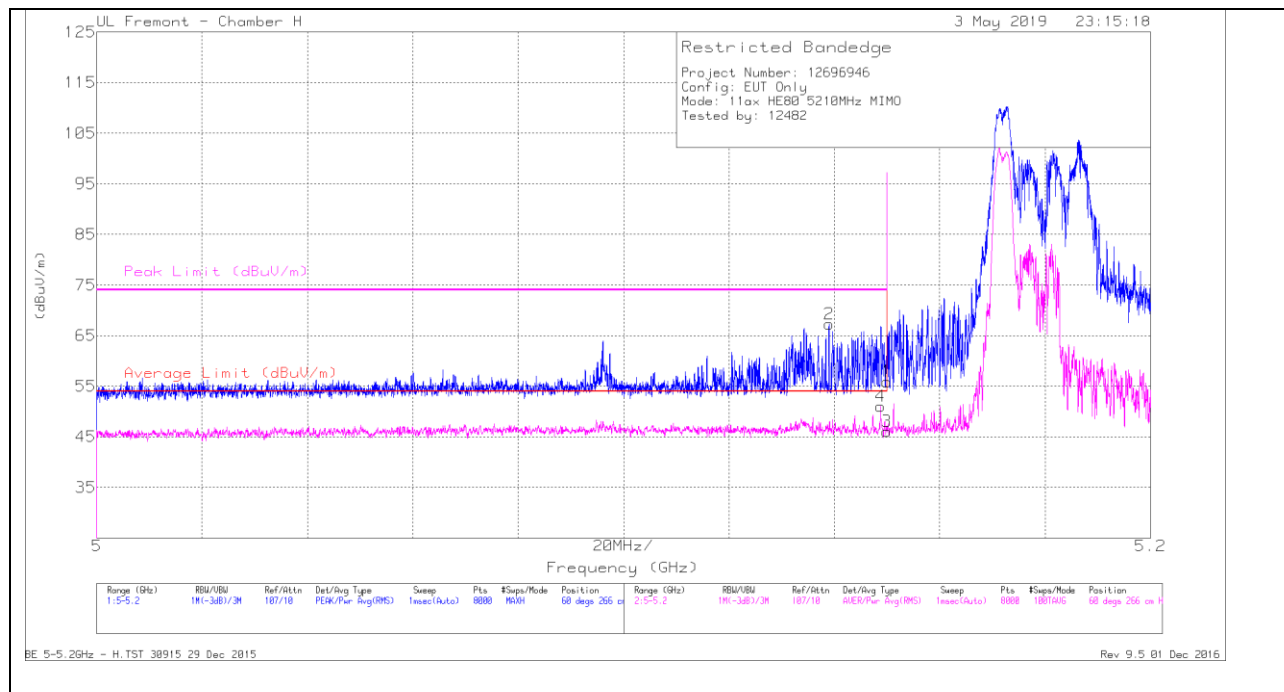BANDEDGE (MID CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF-T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	42.44	Pk	34.4	-20.9	55.94	-	-	74	-18.06	60	266	H
2	* 5.139	53.74	Pk	34.5	-20.9	67.34	-	-	74	-6.66	60	266	H
3	* 5.15	32.53	RMS	34.4	-20.9	46.03	54	-7.97	-	-	60	266	H
4	* 5.149	37.58	RMS	34.4	-21	50.98	54	-3.02	-	-	60	266	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


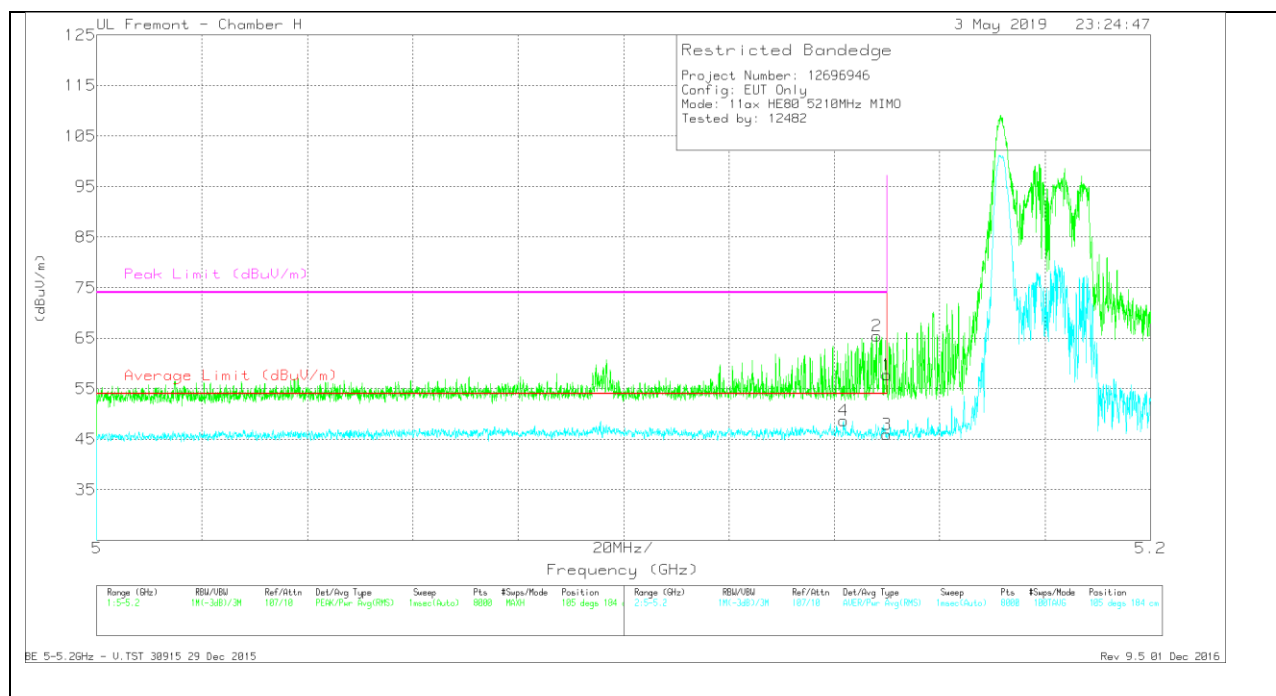


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	44.22	Pk	34.4	-20.9	57.72	-	-	74	-16.28	105	184	V
2	* 5.148	52.04	Pk	34.4	-21	65.44	-	-	74	-8.56	105	184	V
3	* 5.15	32.44	RMS	34.4	-20.9	45.94	54	-8.06	-	-	105	184	V
4	* 5.142	35.22	RMS	34.4	-20.9	48.72	54	-5.28	-	-	105	184	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

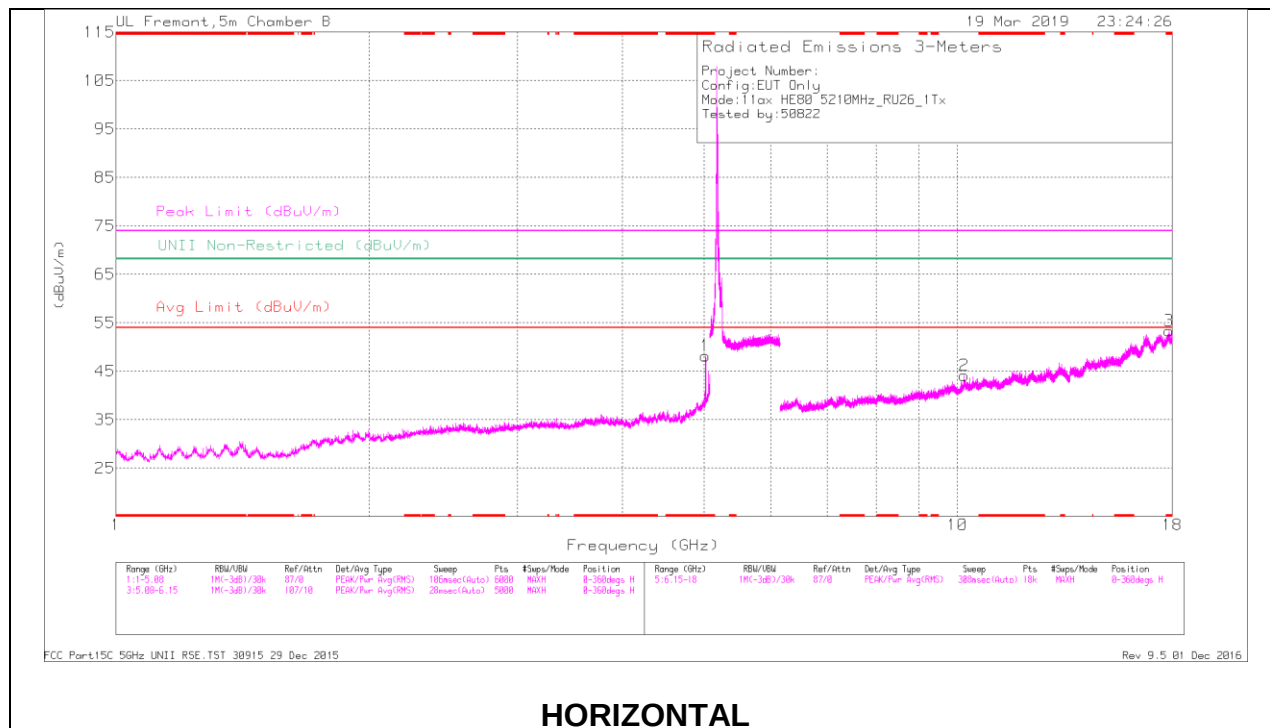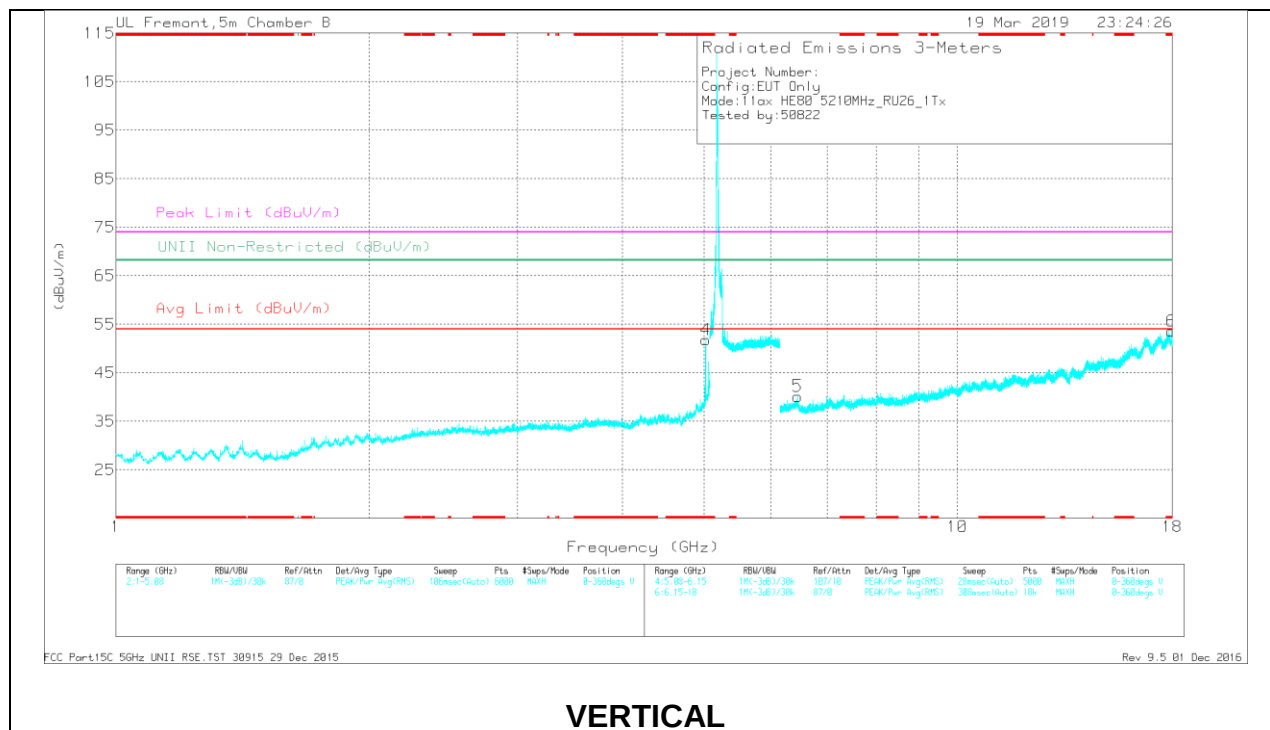HARMONICS AND SPURIOUS EMISSIONS**MID CHANNEL RESULTS****HORIZONTAL****VERTICAL**


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1963 (dBm)	Amp/Cable/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	ULN Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.02	53.81	PK-U	34.6	-26.3	0	62.11	-	-	74	-11.89	-	-	0	207	H
	* 5.021	34.89	ADR	34.6	-26.2	.18	43.47	54	-10.53	-	-	-	-	0	207	H
4	* 5.022	53.79	PK-U	34.6	-26.2	0	62.19	-	-	74	-11.81	-	-	175	277	V
	* 5.021	35.39	ADR	34.6	-26.2	.18	43.97	54	-10.03	-	-	-	-	175	277	V
3	* 17.834	32.61	PK-U	44.4	-16.8	0	60.21	-	-	74	-13.79	-	-	55	239	H
	* 17.835	20.92	ADR	44.4	-16.8	.18	48.7	54	-5.3	-	-	-	-	55	239	H
6	* 17.96	33.21	PK-U	43.8	-17.2	0	59.81	-	-	74	-14.19	-	-	240	257	V
	* 17.96	21.06	ADR	43.8	-17.2	.18	47.84	54	-6.16	-	-	-	-	240	257	V
5	6.452	36.46	PK-U	35.7	-25.4	0	46.76	-	-	-	-	68.2	-21.44	232	120	V
2	10.189	33.58	PK-U	37.8	-21.7	0	49.68	-	-	-	-	68.2	-18.52	87	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

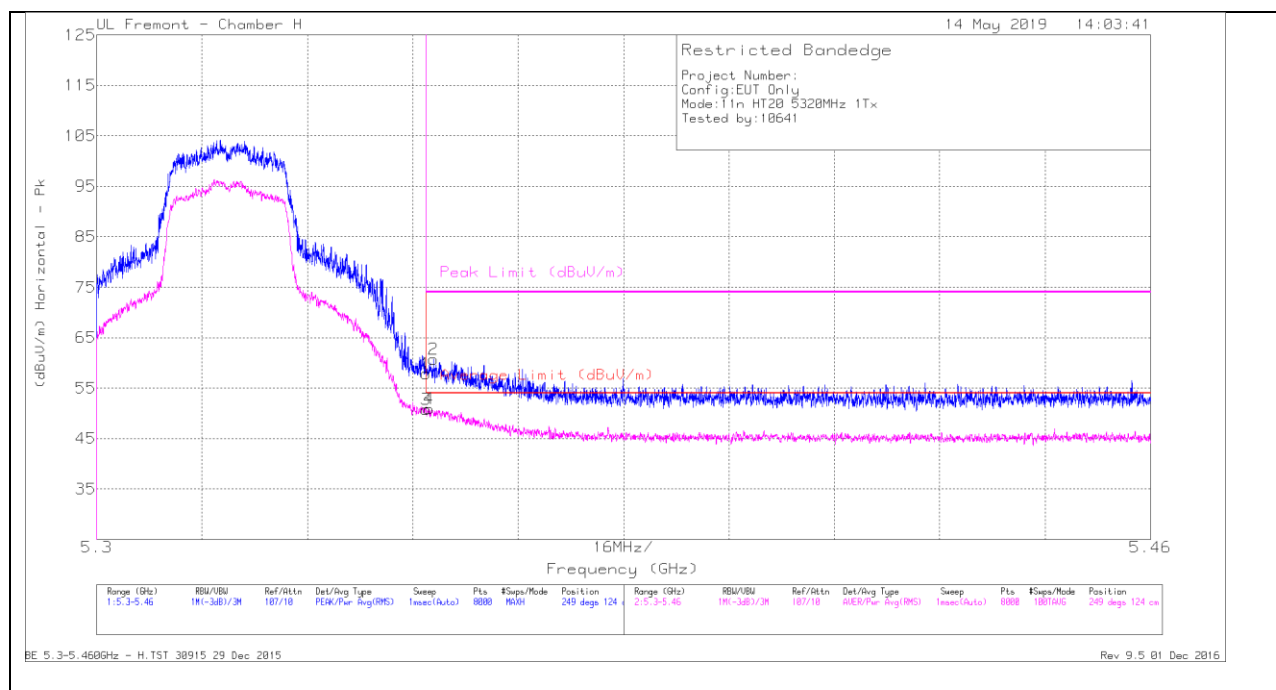1.1.7. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND**1TX Antenna 4 MODE****BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.81	Pk	34.5	-20.5	57.81	-	-	74	-16.19	249	124	H
2	* 5.351	46.57	Pk	34.6	-20.5	60.67	-	-	74	-13.33	249	124	H
3	* 5.35	36.8	RMS	34.5	-20.5	50.8	54	-3.2	-	-	249	124	H
4	* 5.35	36.8	RMS	34.6	-20.5	50.9	54	-3.1	-	-	249	124	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

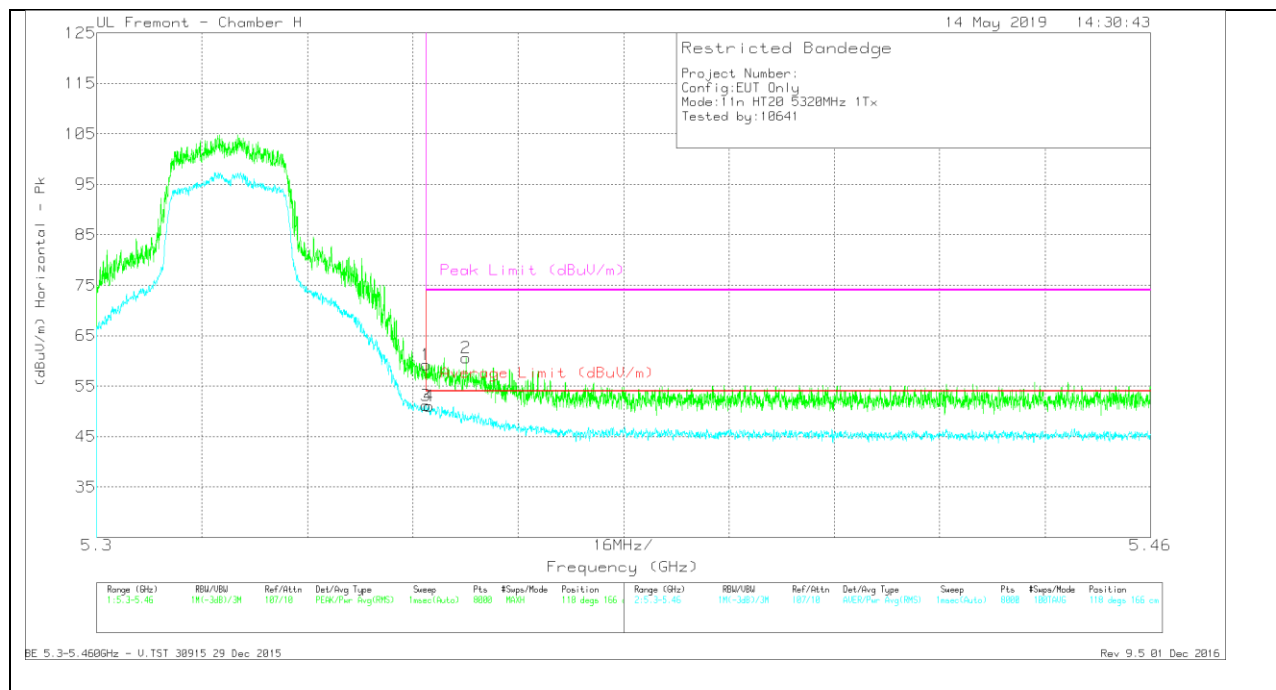

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.26	Pk	34.5	-20.5	59.26	-	-	74	-14.74	118	166	V
2	* 5.356	46.52	Pk	34.6	-20.5	60.62	-	-	74	-13.38	118	166	V
3	* 5.35	37.19	RMS	34.5	-20.5	51.19	54	-2.81	-	-	118	166	V
4	* 5.35	36.89	RMS	34.6	-20.5	50.99	54	-3.01	-	-	118	166	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

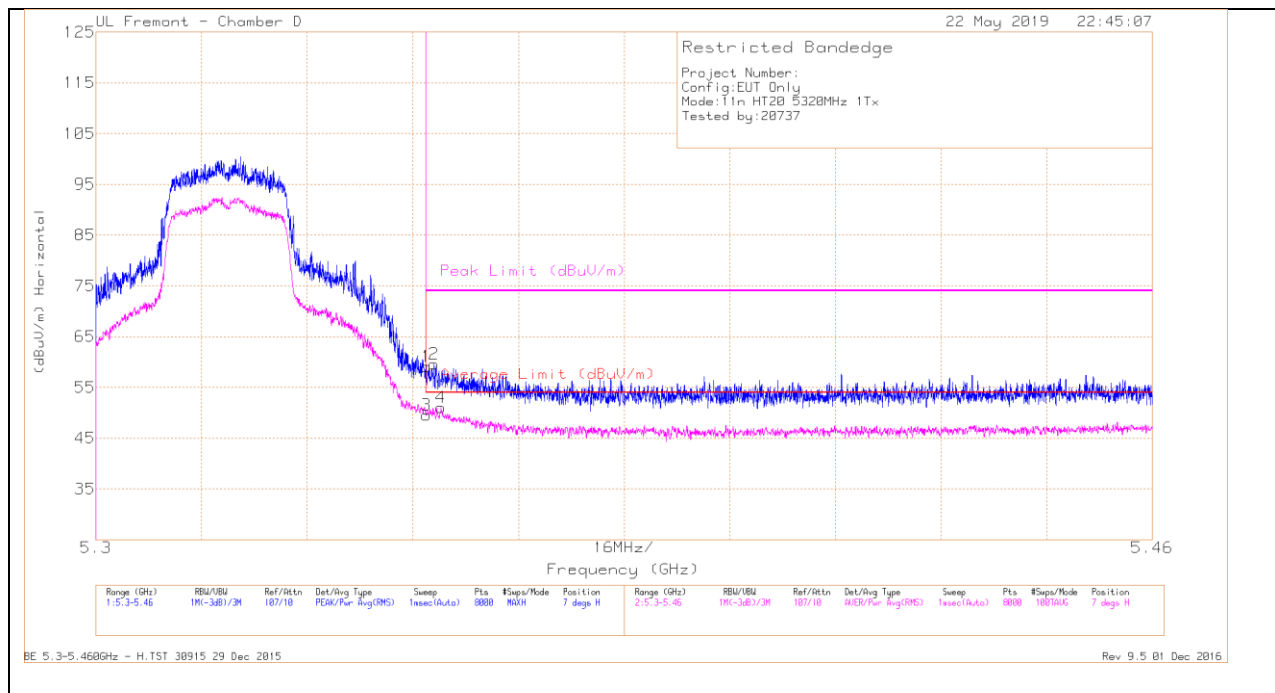


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/FiltriPa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.16	Pk	34.3	-18.3	59.16	-	-	74	-14.84	7	227	H
2	* 5.351	43.62	Pk	34.3	-18.3	59.62	-	-	74	-14.38	7	227	H
3	* 5.35	33.5	RMS	34.3	-18.3	49.5	54	-4.5	-	-	7	227	H
4	* 5.352	35.05	RMS	34.3	-18.3	51.05	54	-2.95	-	-	7	227	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

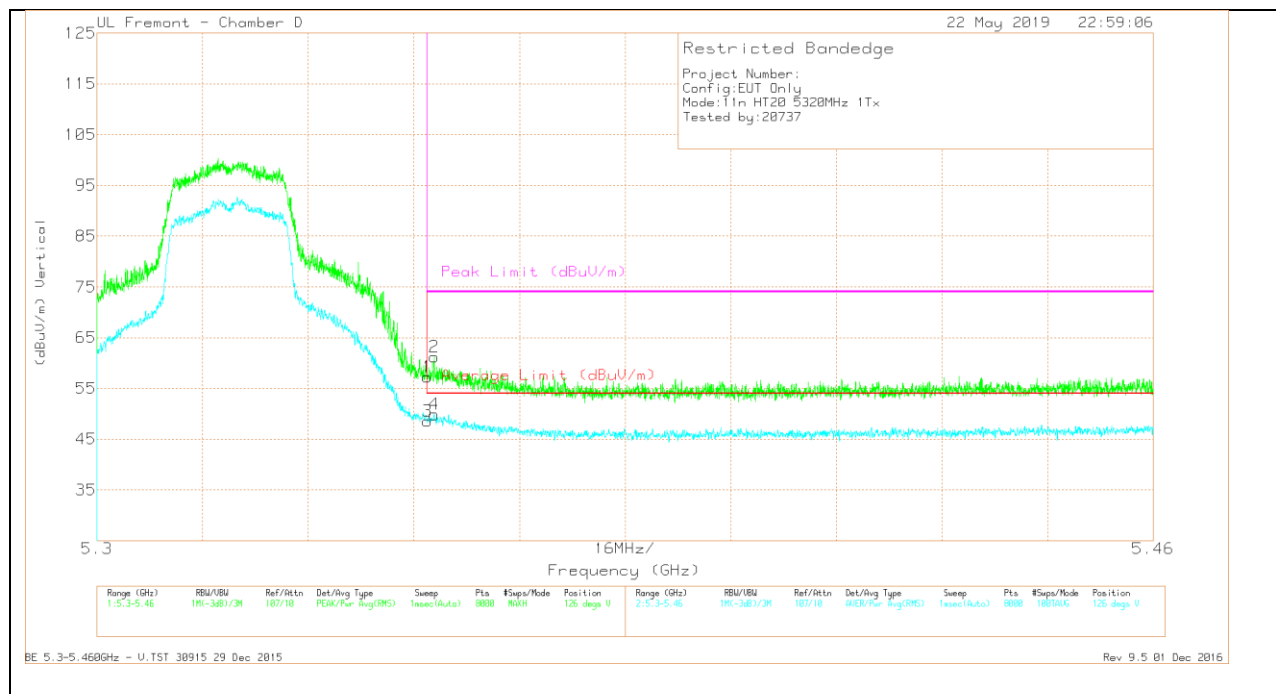

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.22	Pk	34.3	-18.3	57.22	-	-	74	-16.78	126	343	V
2	* 5.351	45.21	Pk	34.3	-18.3	61.21	-	-	74	-12.79	126	343	V
3	* 5.35	32.52	RMS	34.3	-18.3	48.52	54	-5.48	-	-	126	343	V
4	* 5.351	33.86	RMS	34.3	-18.3	49.86	54	-4.14	-	-	126	343	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 4 + Antenna 5 CDD MODE

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

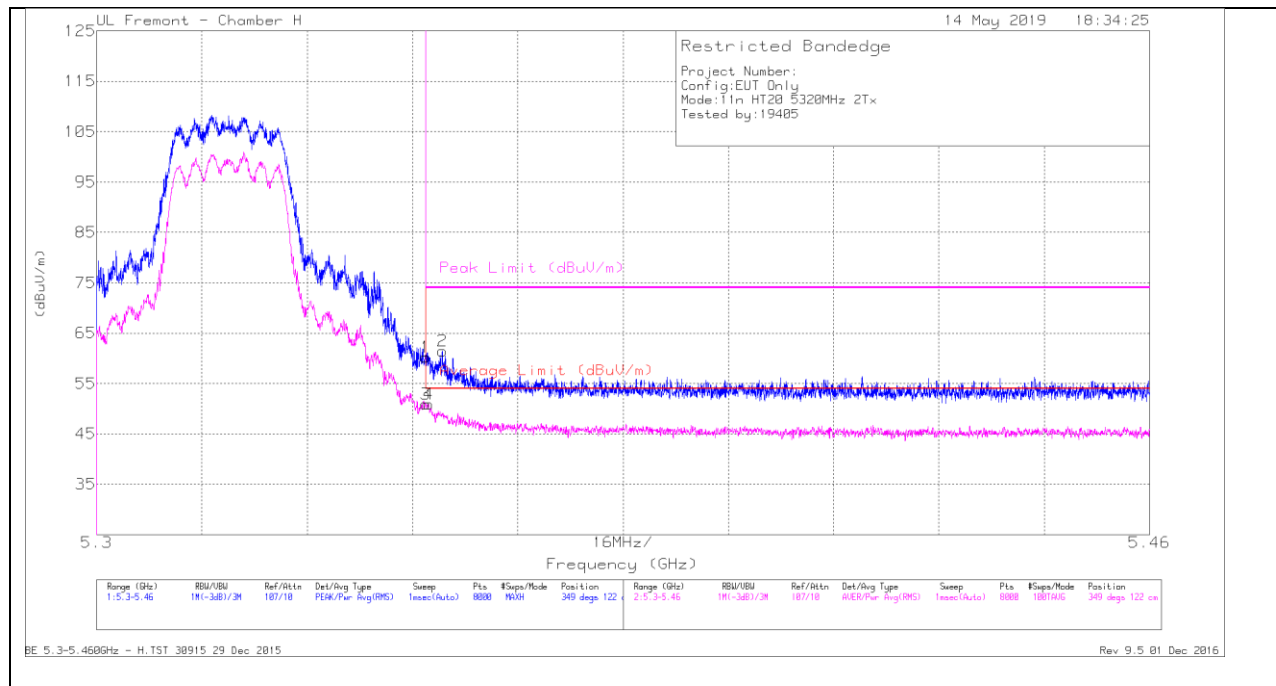

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	46.27	Pk	34.5	-20.5	60.27	-	-	74	-13.73	349	122	H
2	* 5.353	47.39	Pk	34.6	-20.5	61.49	-	-	74	-12.51	349	122	H
3	* 5.35	36.89	RMS	34.5	-20.5	50.89	54	-3.11	-	-	349	122	H
4	* 5.35	36.78	RMS	34.6	-20.5	50.88	54	-3.12	-	-	349	122	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

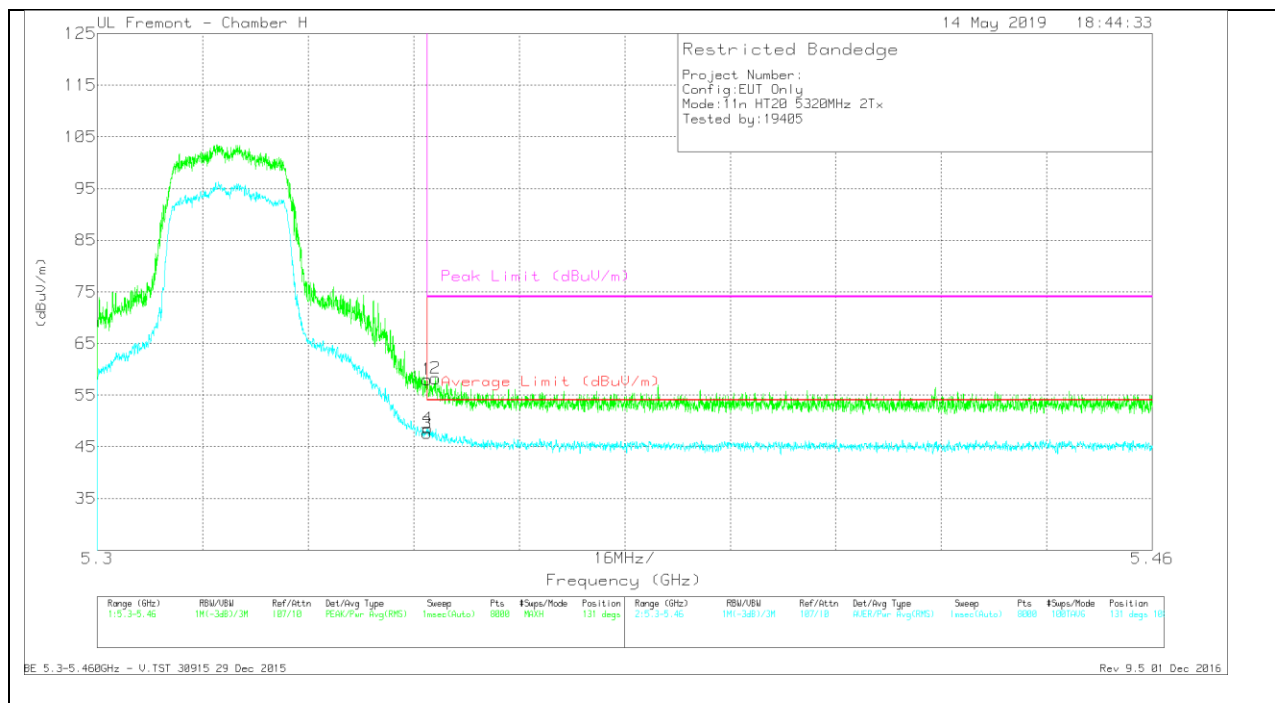


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.01	Pk	34.5	-20.5	58.01	-	-	74	-15.99	131	108	V
2	* 5.351	44.17	Pk	34.6	-20.5	58.27	-	-	74	-15.73	131	108	V
3	* 5.35	33.59	RMS	34.5	-20.5	47.59	54	-6.41	-	-	131	108	V
4	* 5.35	34.46	RMS	34.6	-20.5	48.56	54	-5.44	-	-	131	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

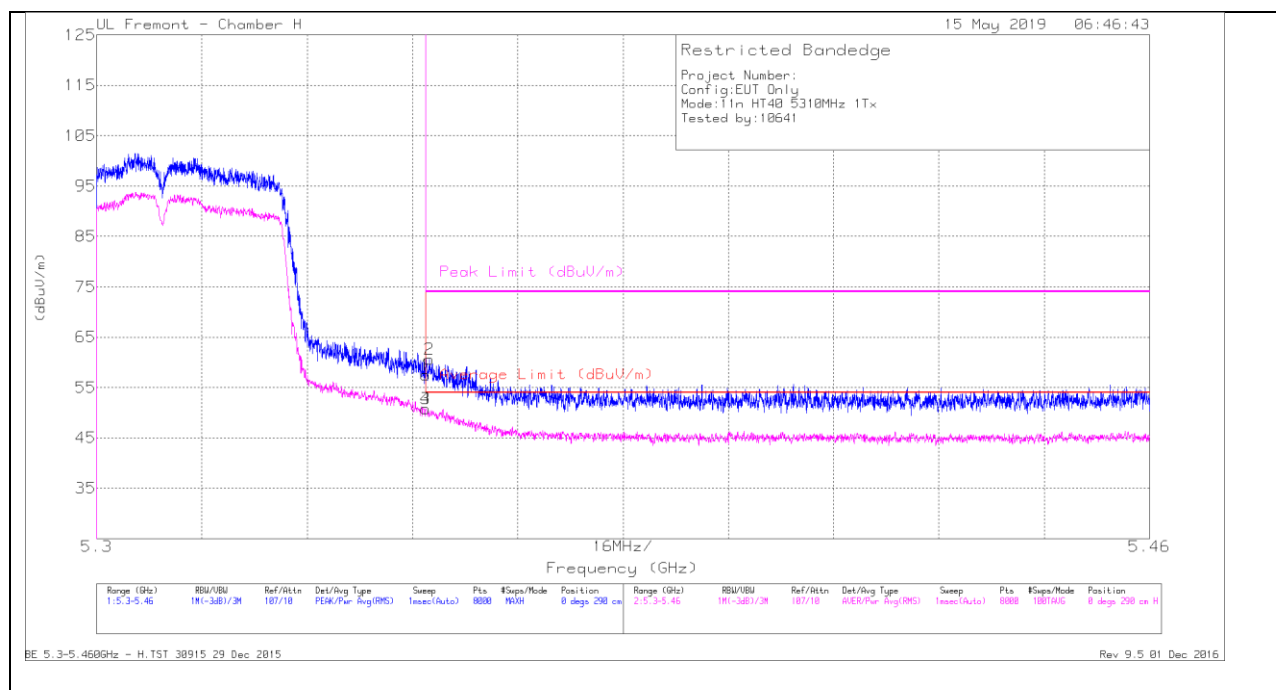1.1.8. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND**1TX Antenna 4 MODE****BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.5	PK	34.5	-20.5	0	57.5	-	-	74	-16.5	0	290	H
2	* 5.351	46.55	PK	34.6	-20.5	0	60.65	-	-	74	-13.35	0	290	H
3	* 5.35	36.8	RMS	34.5	-20.5	0.09	50.89	54	-3.11	-	-	0	290	H
4	* 5.35	36.8	RMS	34.5	-20.5	0.09	50.89	54	-3.11	-	-	0	290	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

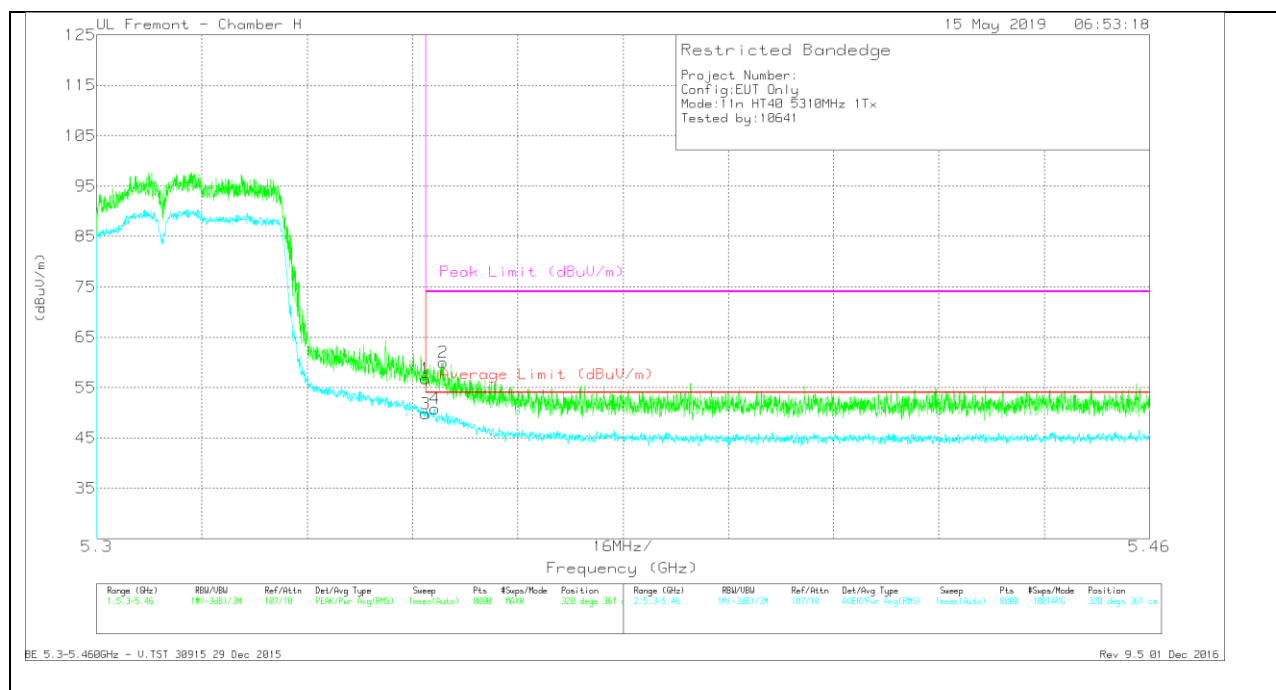


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.76	Pk	34.5	-20.5	0	56.76	-	-	74	-17.24	320	361	V
2	* 5.353	45.86	Pk	34.6	-20.5	0	59.96	-	-	74	-14.04	320	361	V
3	* 5.35	35.84	RMS	34.5	-20.5	0.09	49.93	54	-4.07	-	-	320	361	V
4	* 5.351	36.66	RMS	34.6	-20.5	0.09	50.85	54	-3.15	-	-	320	361	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

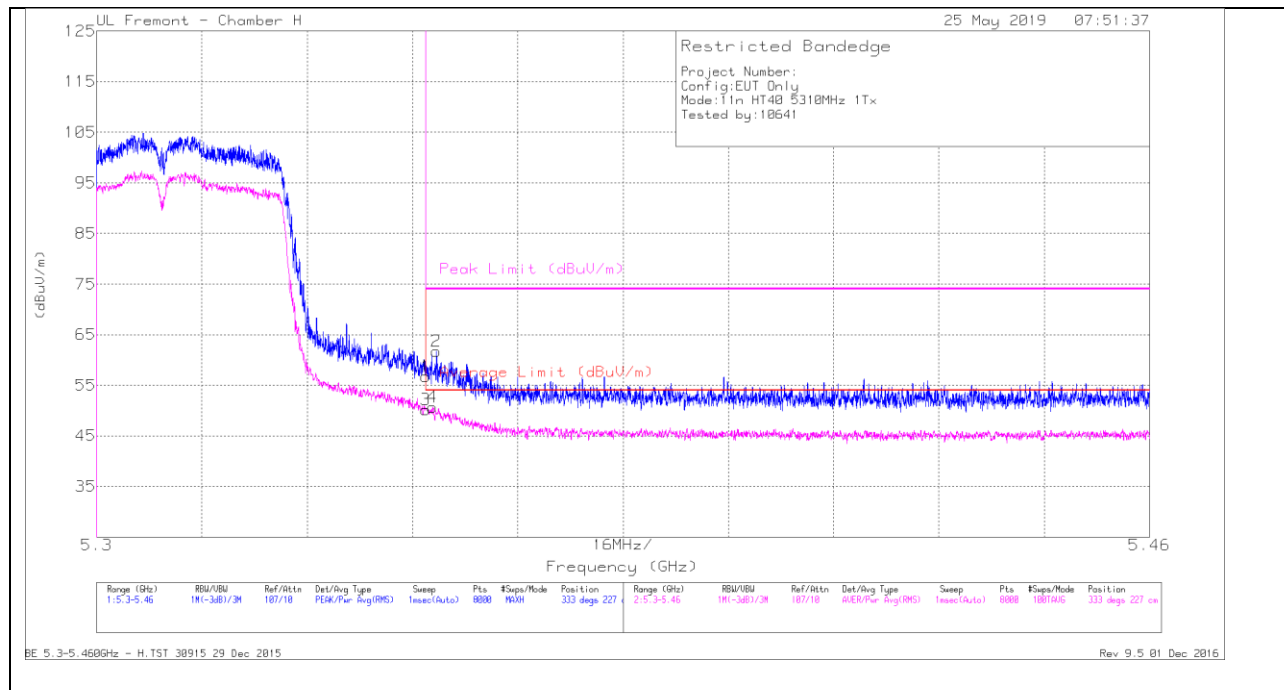1TX Antenna 5 MODE**BANDEGE (HIGH CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.77	Pk	34.5	-20.5	0	56.77	-	-	74	-17.23	333	227	H
2	* 5.352	47.57	Pk	34.6	-20.5	0	61.67	-	-	74	-12.33	333	227	H
3	* 5.35	36.13	RMS	34.5	-20.5	0.09	50.22	54	-3.78	-	-	333	227	H
4	* 5.351	36.55	RMS	34.6	-20.5	0.09	50.74	54	-3.26	-	-	333	227	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

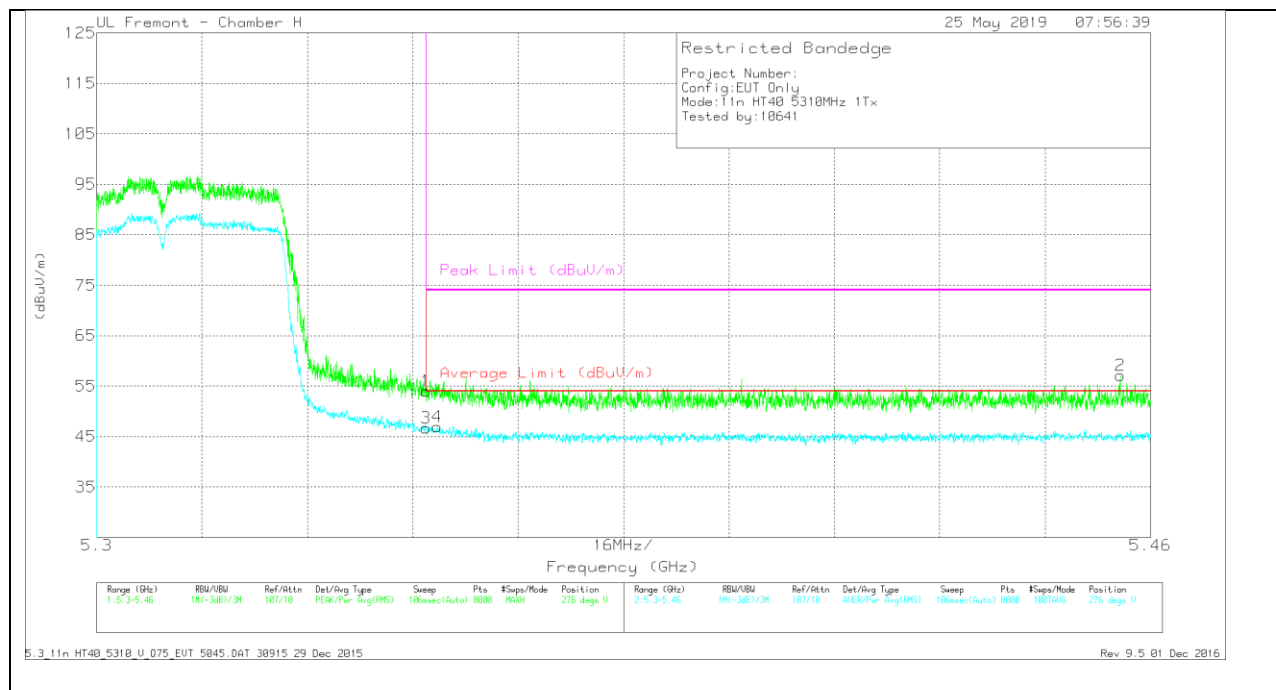


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.98	Pk	34.5	-20.5	0	53.98	-	-	74	-20.02	276	368	V
2	* 5.455	42.95	Pk	34.6	-20.4	0	57.15	-	-	74	-16.85	276	368	V
3	* 5.35	32.64	RMS	34.5	-20.5	0.09	46.73	54	-6.72	-	-	276	368	V
4	* 5.352	32.86	RMS	34.6	-20.5	0.09	47.05	54	-6.95	-	-	276	368	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

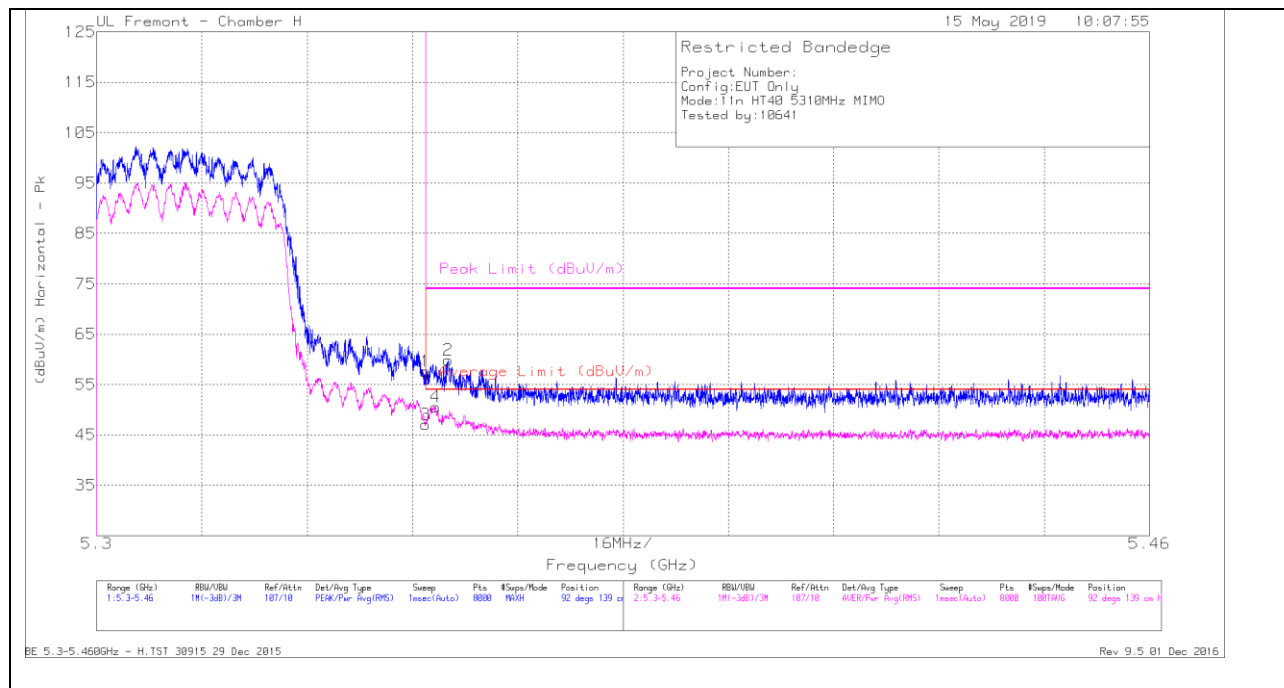2TX Antenna 4 + Antenna 5 CDD MODE**BANDEGE (HIGH CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.6	Pk	34.5	-20.5	57.6	-	-	74	-16.4	92	139	H
2	* 5.353	45.79	Pk	34.6	-20.5	59.89	-	-	74	-14.11	92	139	H
3	* 5.35	33.11	RMS	34.5	-20.5	47.11	54	-6.89	-	-	92	139	H
4	* 5.352	36.5	RMS	34.6	-20.5	50.6	54	-3.4	-	-	92	139	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

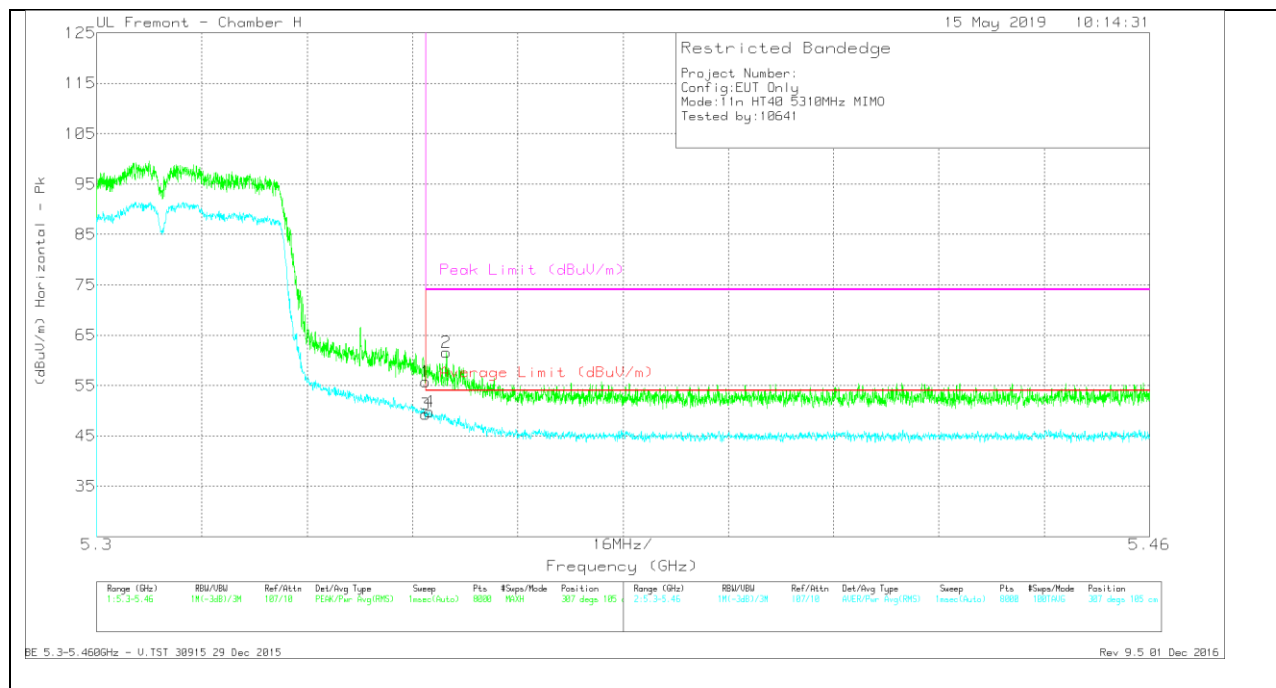


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T136 (dB/m)	Amp/Cbll/Ftr/Pa d (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.7	Pk	34.5	-20.5	55.7	-	-	74	-18.3	307	105	V
2	* 5.353	47.45	Pk	34.6	-20.5	61.55	-	-	74	-12.45	307	105	V
3	* 5.35	35.26	RMS	34.5	-20.5	49.26	54	-4.74	-	-	307	105	V
4	* 5.351	35.75	RMS	34.6	-20.5	49.85	54	-4.15	-	-	307	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

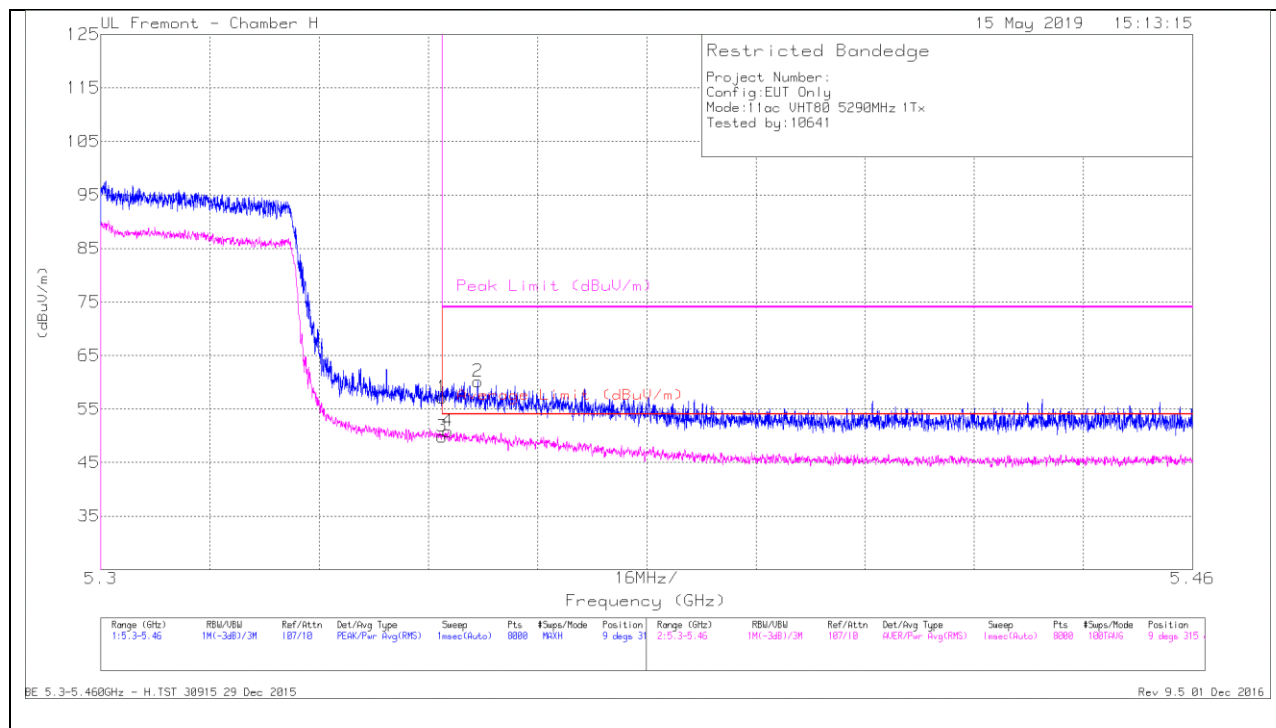1.1.9. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.3 GHz BAND**1TX Antenna 4 MODE****BANDEDGE (MID CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.17	Pk	34.5	-20.5	0	57.17	-	-	74	-16.83	9	315	H
2	* 5.355	46.05	Pk	34.6	-20.5	0	60.15	-	-	74	-13.85	9	315	H
3	* 5.35	35.68	RMS	34.5	-20.5	.19	49.87	54	-4.13	-	-	9	315	H
4	* 5.351	36.55	RMS	34.6	-20.5	.19	50.84	54	-3.16	-	-	9	315	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

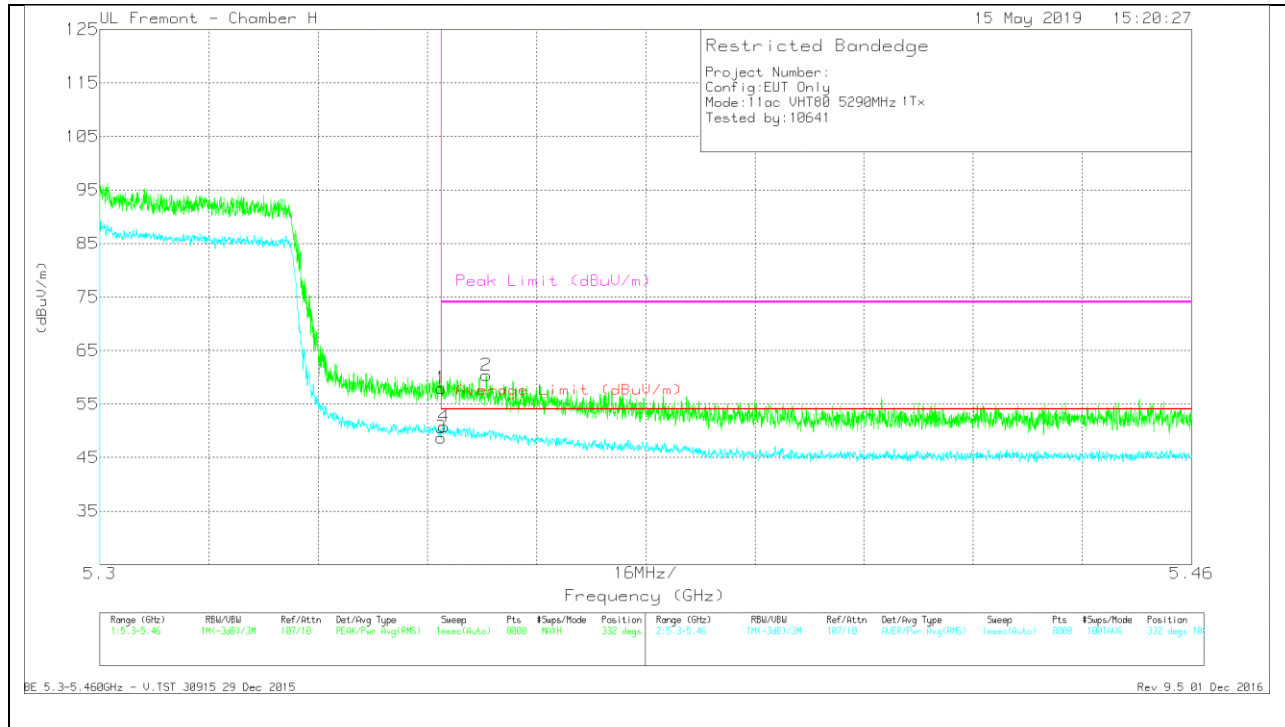

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.95	Pk	34.5	-20.5	0	57.95	-	-	74	-16.05	332	108	V
2	* 5.357	46.26	Pk	34.6	-20.5	0	60.36	-	-	74	-13.64	332	108	V
3	* 5.35	34.55	RMS	34.5	-20.5	.19	48.74	54	-5.26	-	-	332	108	V
4	* 5.35	36.45	RMS	34.6	-20.5	.19	50.74	54	-3.26	-	-	332	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

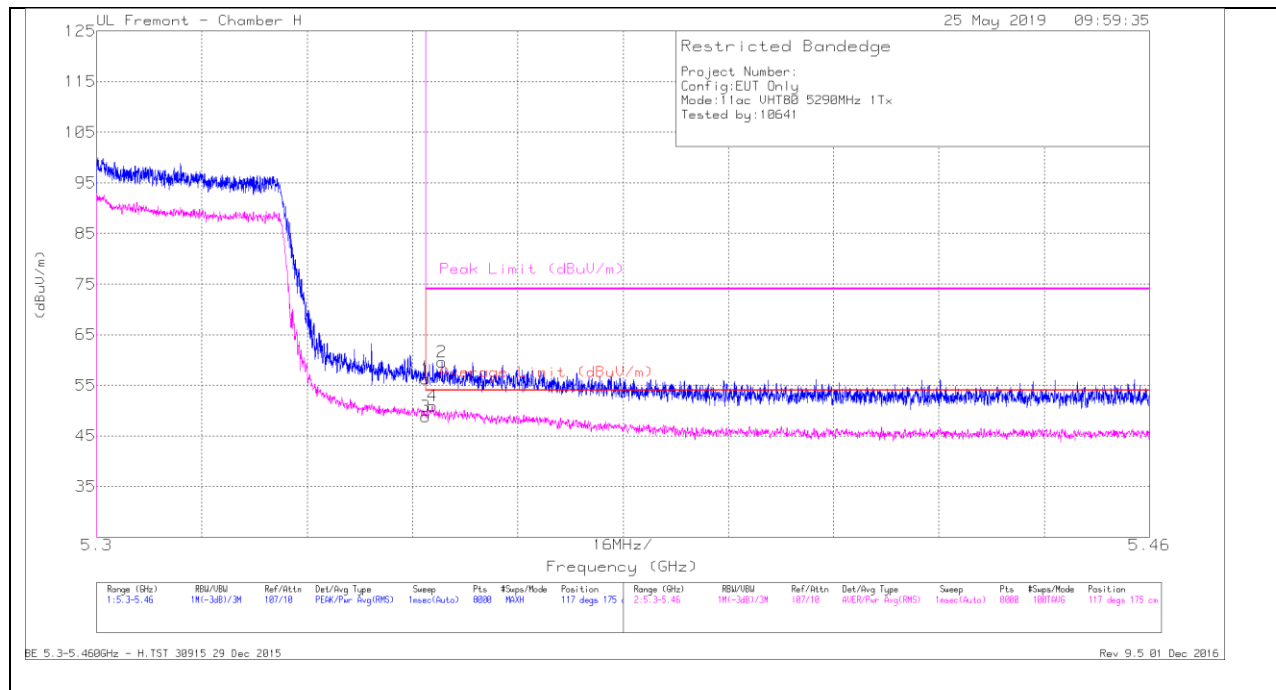


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dBm)	Ampl/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.23	Pk	34.5	-20.5	0	56.23	-	-	74	-17.77	117	175	H
2	* 5.352	45.49	Pk	34.6	-20.5	0	59.59	-	-	74	-14.41	117	175	H
3	* 5.35	34.57	RMS	34.5	-20.5	.19	48.76	54	-5.24	-	-	117	175	H
4	* 5.351	36.59	RMS	34.6	-20.5	.19	50.88	54	-3.12	-	-	117	175	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

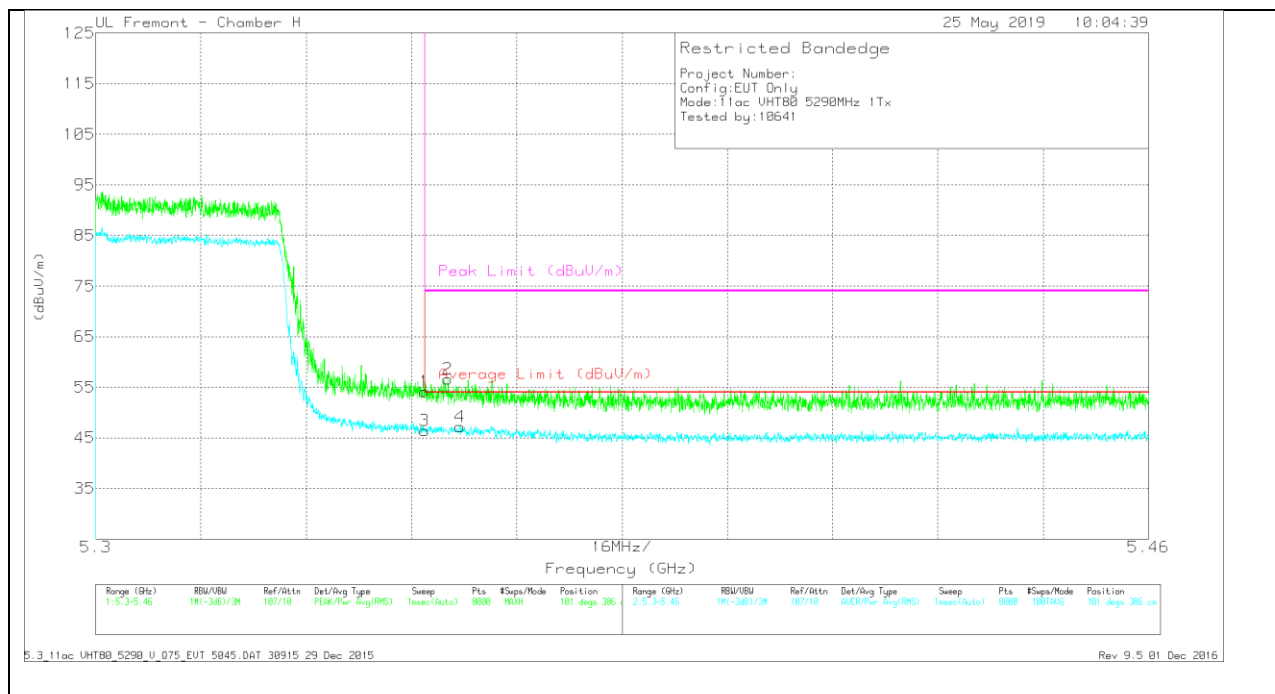

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dBm)	Ampl/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.15	Pk	34.5	-20.5	0	54.15	-	-	74	-19.85	101	386	V
2	* 5.354	42.54	Pk	34.6	-20.5	0	56.64	-	-	74	-17.36	101	386	V
3	* 5.35	32.41	RMS	34.5	-20.5	.19	46.60	54	-7.40	-	-	101	386	V
4	* 5.355	33.07	RMS	34.6	-20.5	.19	47.36	54	-6.64	-	-	101	386	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 4 + Antenna 5 CDD MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

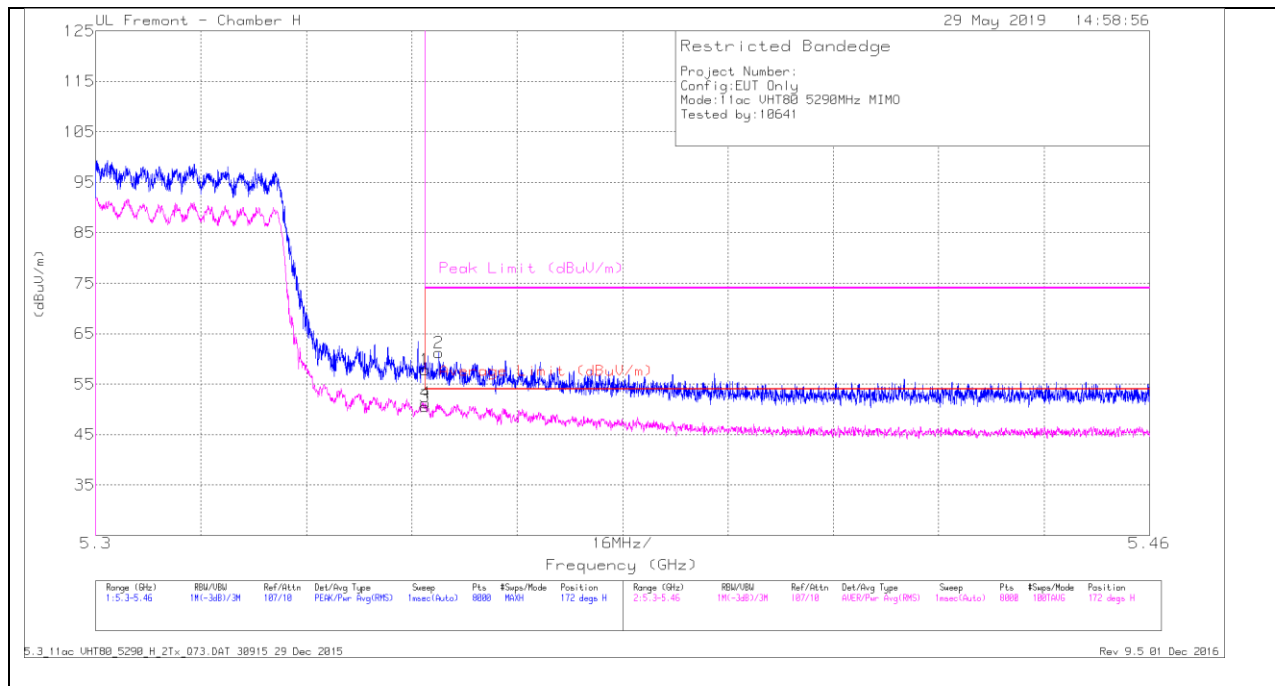

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dBm)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.85	Pk	34.5	-20.5	0	57.85	-	-	74	-16.15	172	222	H
2	* 5.352	47.07	Pk	34.6	-20.5	0	61.17	-	-	74	-12.83	172	222	H
3	* 5.35	36.42	RMS	34.5	-20.5	.19	50.61	54	-3.3	-	-	172	222	H
4	* 5.35	37.07	RMS	34.5	-20.5	.19	51.26	54	-2.74	-	-	172	222	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection