


VERTICAL RESULT

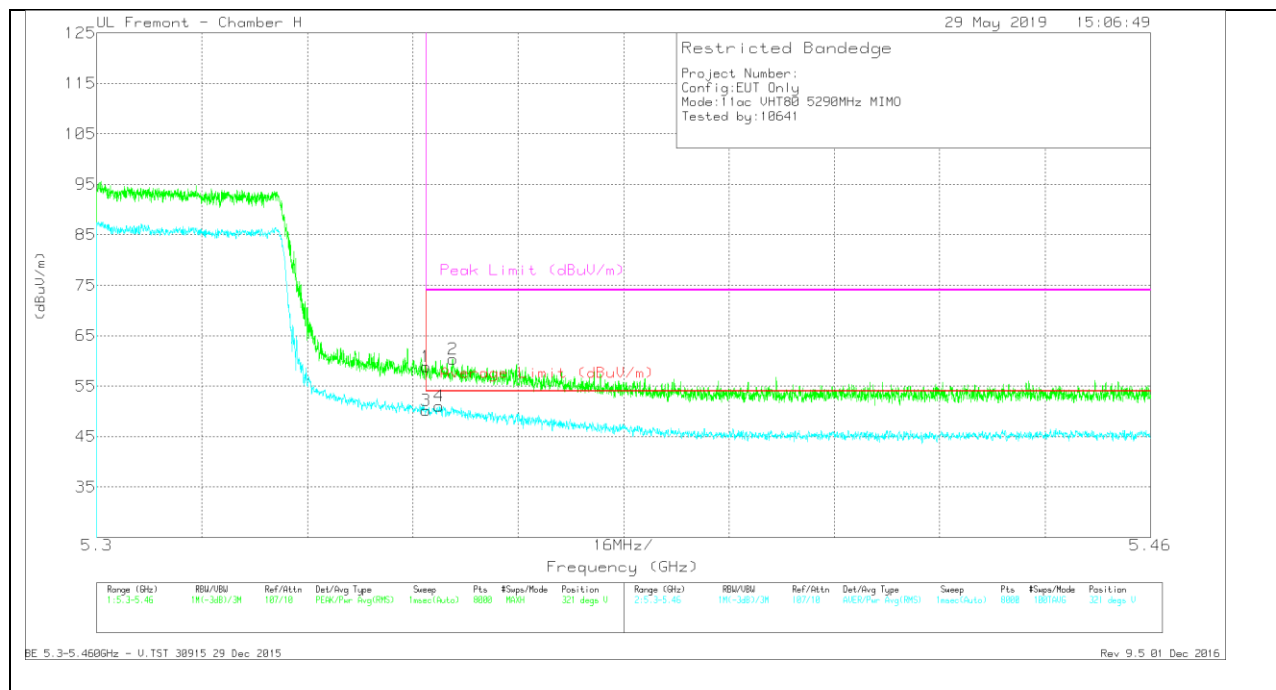


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dBm)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.83	Pk	34.5	-20.5	0	58.83	-	-	74	-15.17	321	321	V
2	* 5.354	46.22	Pk	34.6	-20.5	0	60.32	-	-	74	-13.68	321	321	V
3	* 5.35	36.03	RMS	34.5	-20.5	19	50.22	54	-3.78	-	-	321	321	V
4	* 5.352	36.75	RMS	34.6	-20.5	19	51.04	54	-2.96	-	-	321	321	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

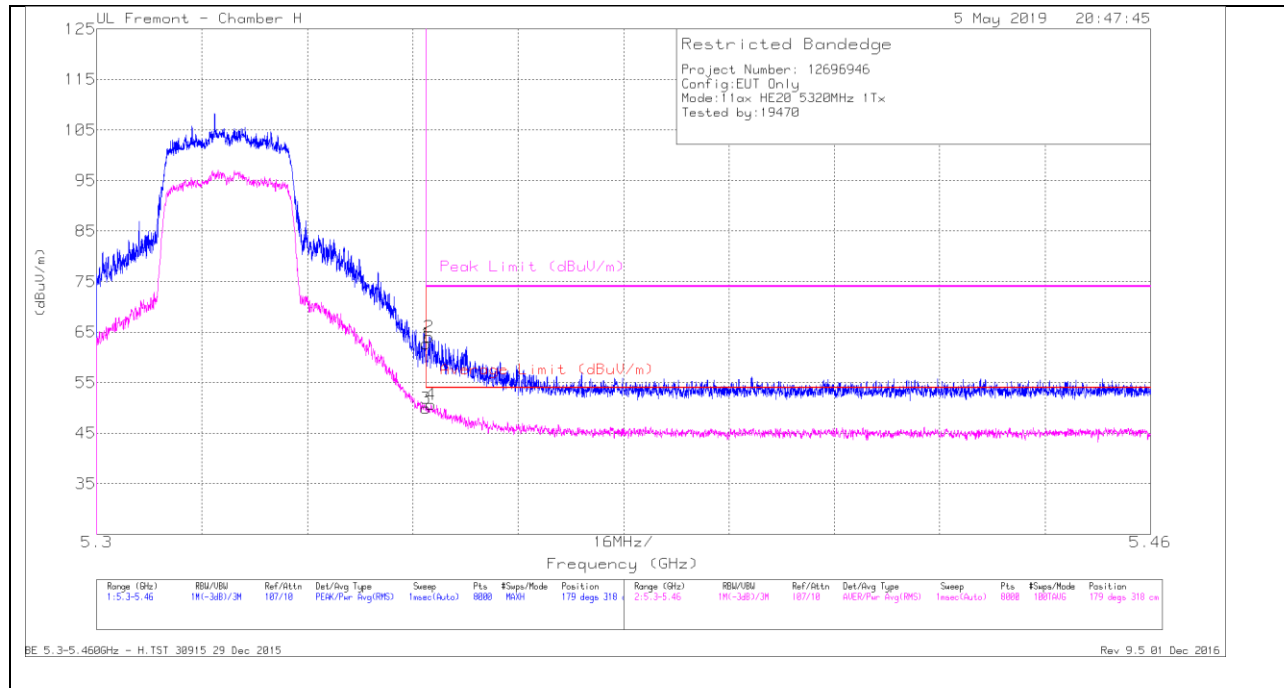1.1.10. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.3 GHz BAND**1TX Antenna 4 MODE – 242 Tones, RU Index 61****BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	48.67	Pk	34.5	-20.5	62.67	-	-	74	-11.33	179	318	H
2	* 5.351	49.99	Pk	34.6	-20.5	64.09	-	-	74	-9.91	179	318	H
3	* 5.35	35.94	RMS	34.5	-20.5	49.94	54	-4.06	-	-	179	318	H
4	* 5.351	36.56	RMS	34.6	-20.5	50.66	54	-3.34	-	-	179	318	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

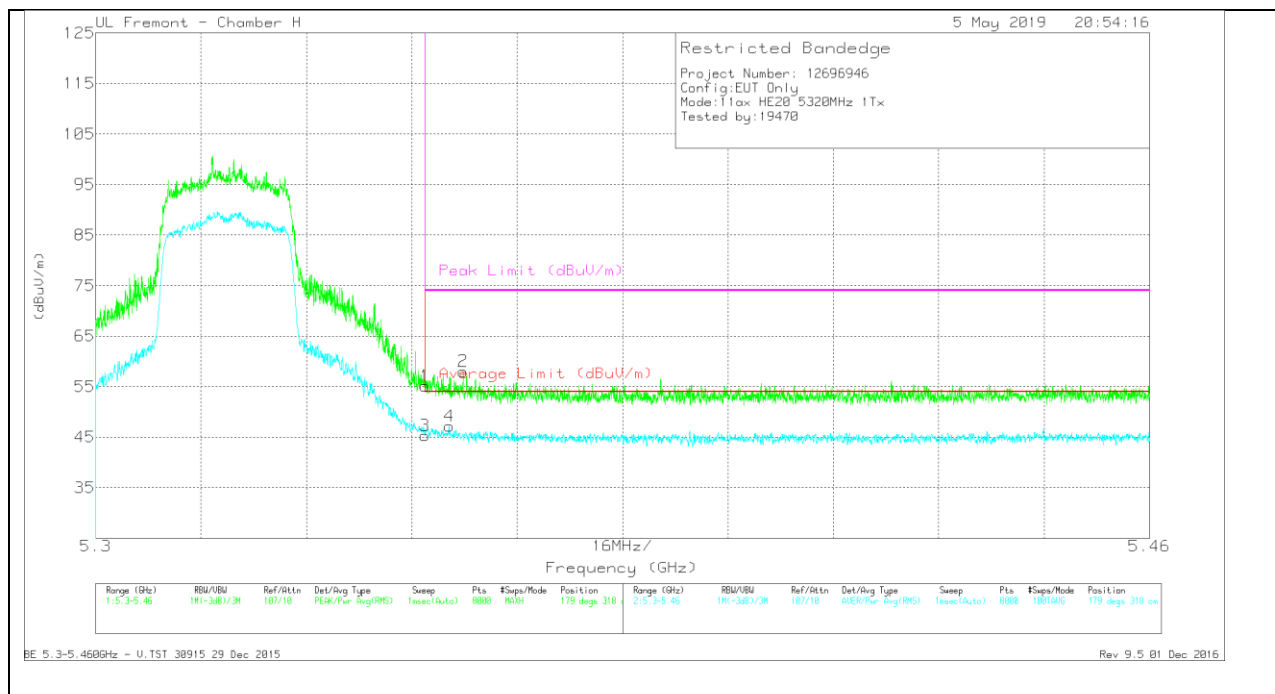


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.17	PK	34.5	-20.5	55.17	-	-	74	-18.83	179	318	V
2	* 5.356	43.95	PK	34.6	-20.5	58.05	-	-	74	-15.95	179	318	V
3	* 5.35	31.37	RMS	34.5	-20.5	45.37	54	-8.63	-	-	179	318	V
4	* 5.354	33.08	RMS	34.6	-20.5	47.18	54	-6.82	-	-	179	318	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

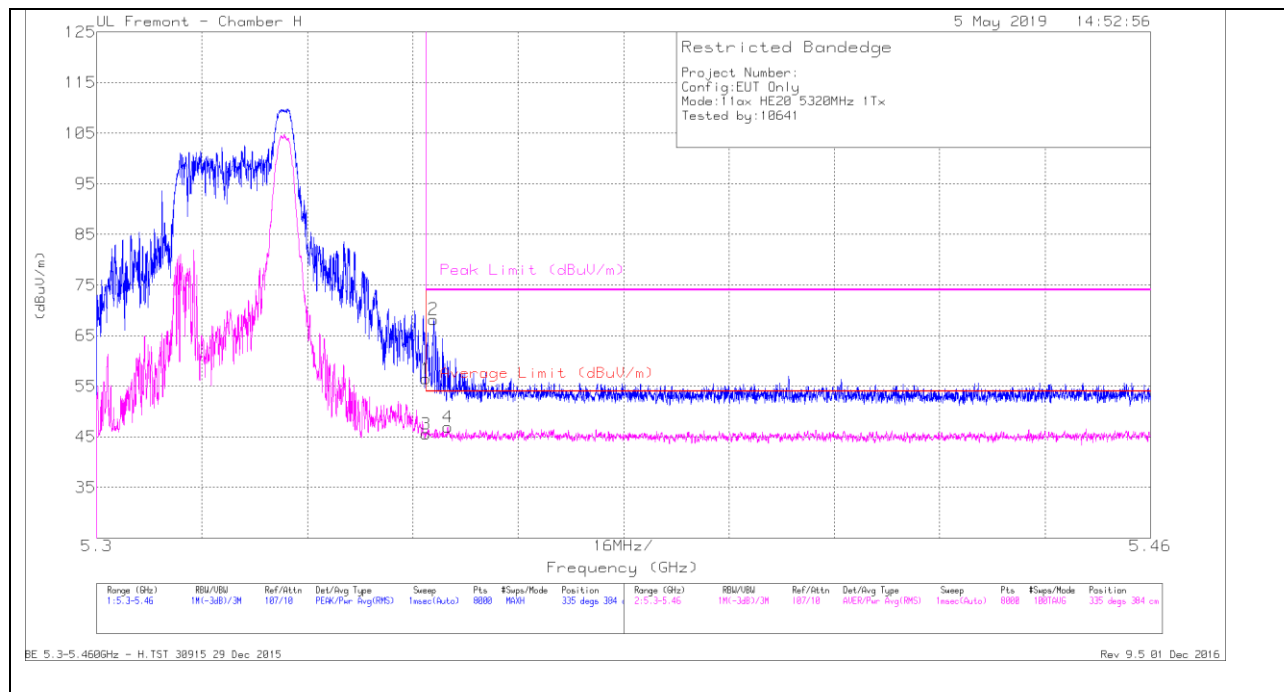1TX Antenna 4 MODE – 26 Tones, RU Index 8**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.5	Pk	34.5	-20.5	56.5	-	-	74	-17.5	335	384	H
2	* 5.351	54.13	Pk	34.6	-20.5	68.23	-	-	74	-5.77	335	384	H
3	* 5.35	31.59	RMS	34.5	-20.5	45.59	54	-8.41	-	-	335	384	H
4	* 5.353	32.85	RMS	34.6	-20.5	46.95	54	-7.05	-	-	335	384	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

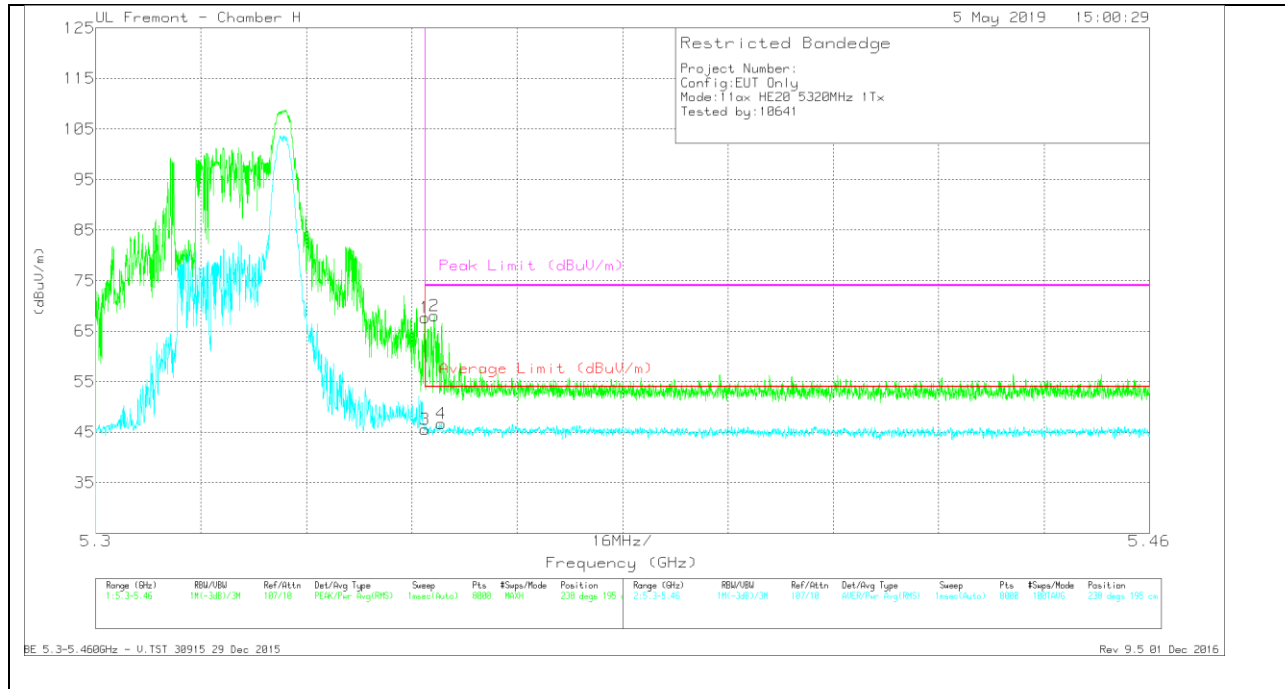

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	53.68	Pk	34.5	-20.5	67.68	-	-	74	-6.32	238	195	V
2	* 5.351	53.98	PK	34.6	-20.5	68.08	-	-	74	-5.92	238	195	V
3	* 5.35	31.52	RMS	34.5	-20.5	45.52	54	-8.48	-	-	238	195	V
4	* 5.352	32.64	RMS	34.6	-20.5	46.74	54	-7.26	-	-	238	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 5 MODE – 242 Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

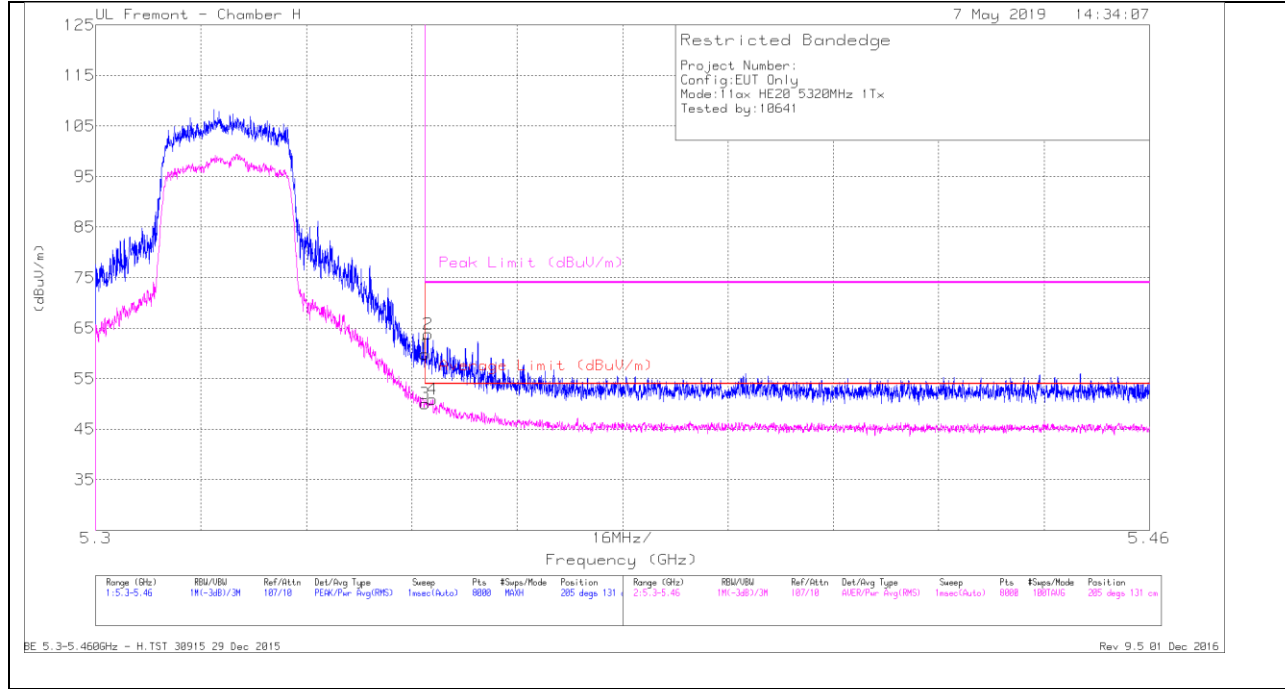


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.84	Pk	34.5	-20.5	59.84	-	-	74	-14.16	205	131	H
2	* 5.35	49.72	Pk	34.6	-20.5	63.82	-	-	74	-10.18	205	131	H
3	* 5.35	35.99	RMS	34.5	-20.5	49.99	54	-4.01	-	-	205	131	H
4	* 5.351	36.8	RMS	34.6	-20.5	50.9	54	-3.1	-	-	205	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

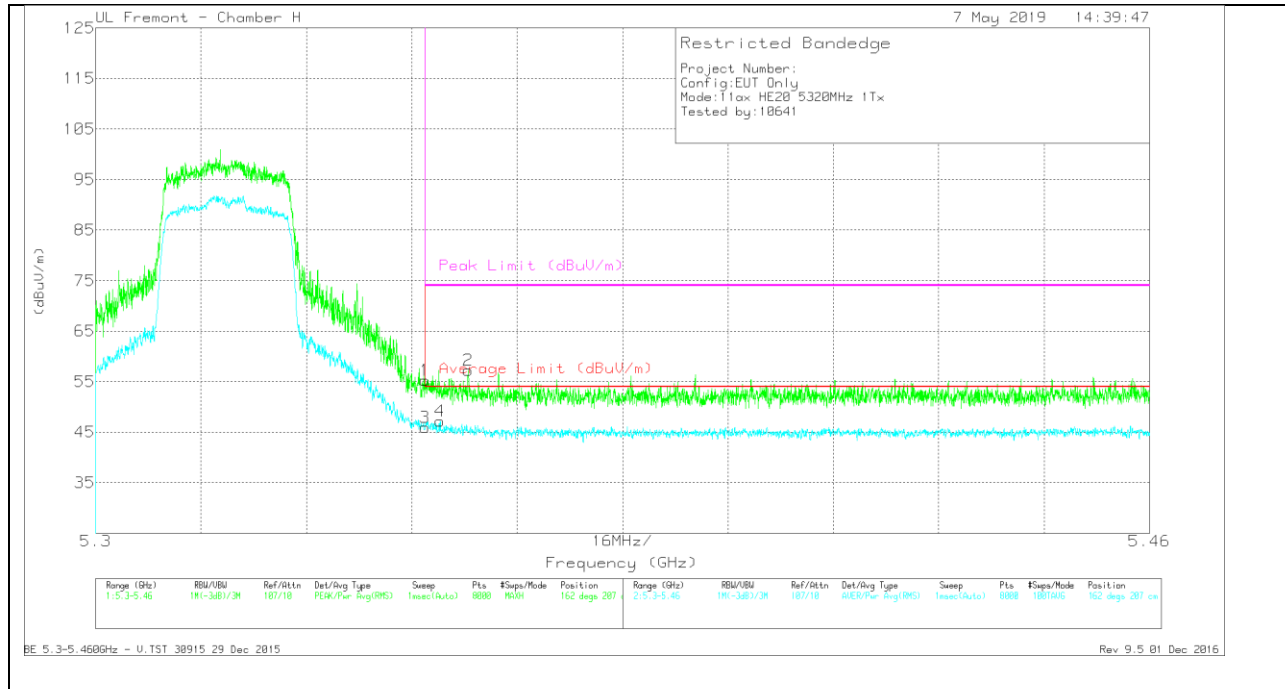


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.28	Pk	34.5	-20.5	55.28	-	-	74	-18.72	162	207	V
2	* 5.357	43.19	Pk	34.6	-20.5	57.29	-	-	74	-16.71	162	207	V
3	* 5.35	31.9	RMS	34.5	-20.5	45.9	54	-8.1	-	-	162	207	V
4	* 5.352	33.09	RMS	34.6	-20.5	47.19	54	-6.81	-	-	162	207	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

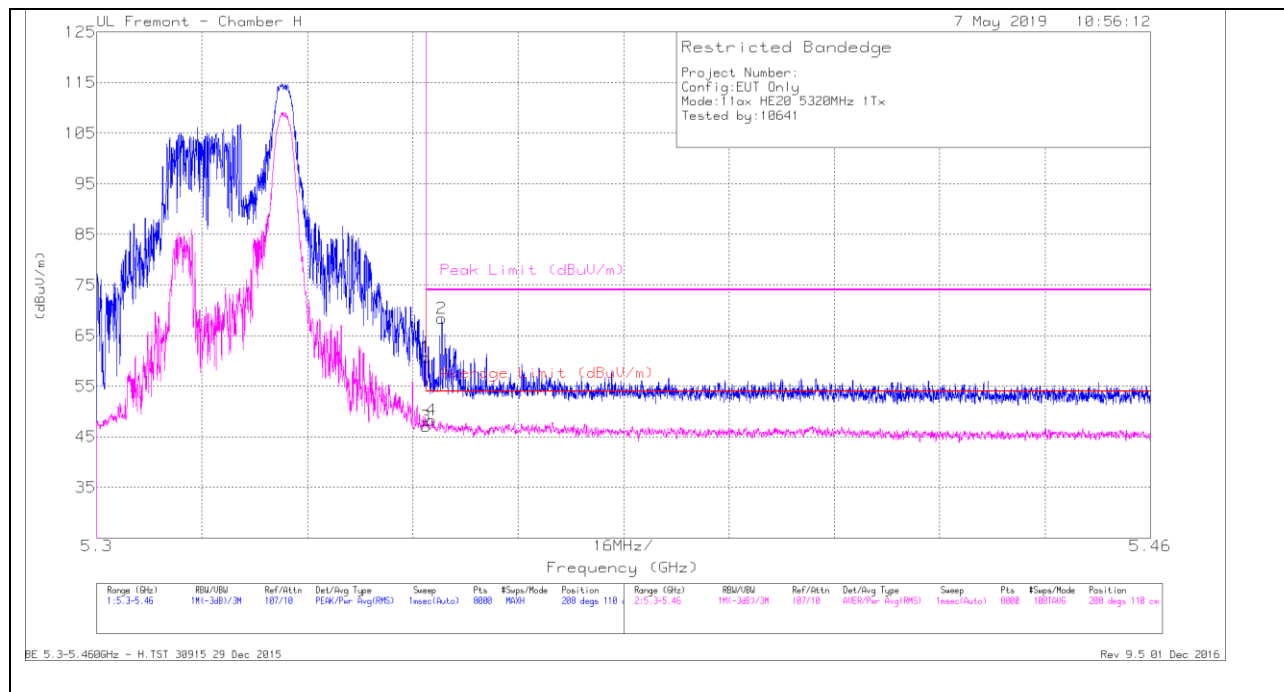1TX Antenna 5 MODE – 26 Tones, RU Index 8**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	46.67	PK	34.5	-20.5	60.67	-	-	74	-13.33	208	110	H
2	* 5.352	54.32	PK	34.6	-20.5	68.42	-	-	74	-5.58	208	110	H
3	* 5.35	33.03	RMS	34.5	-20.5	47.03	54	-6.97	-	-	208	110	H
4	* 5.351	34.24	RMS	34.6	-20.5	48.34	54	-5.66	-	-	208	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

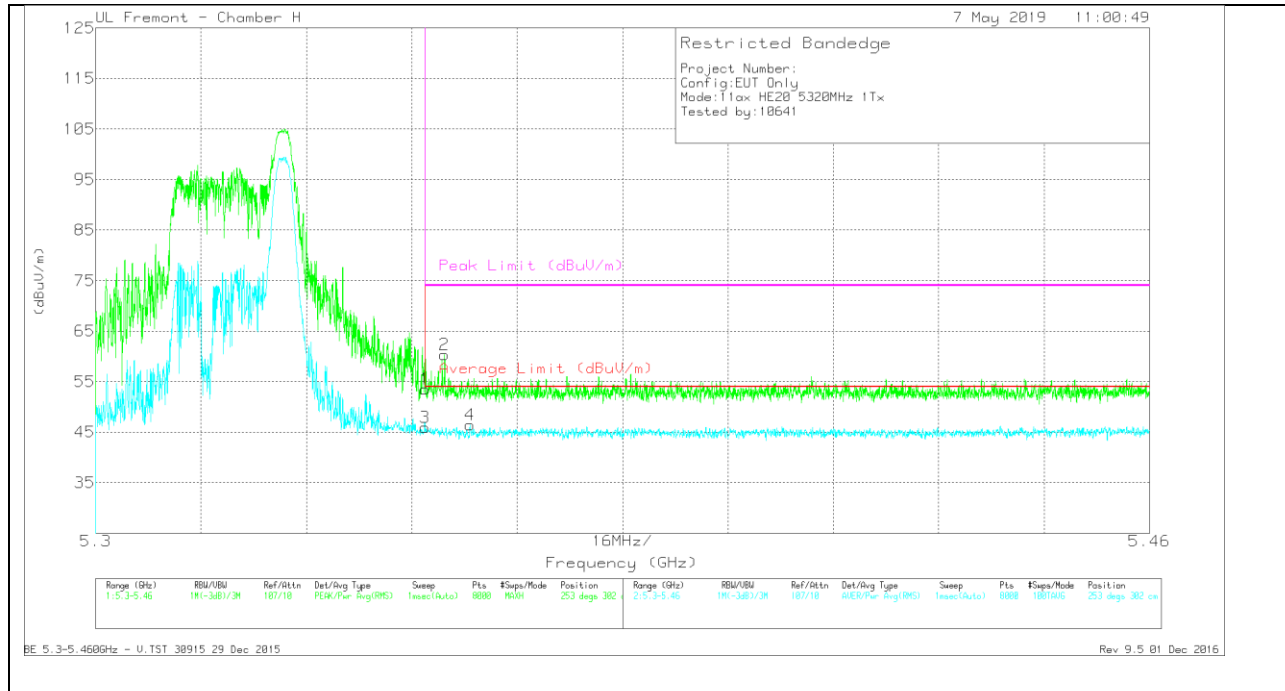


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.52	Pk	34.5	-20.5	53.52	-	-	74	-20.48	253	302	V
2	* 5.353	46.27	Pk	34.6	-20.5	60.37	-	-	74	-13.63	253	302	V
3	* 5.35	31.89	RMS	34.5	-20.5	45.89	54	-8.11	-	-	253	302	V
4	* 5.357	32.31	RMS	34.6	-20.5	46.41	54	-7.59	-	-	253	302	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

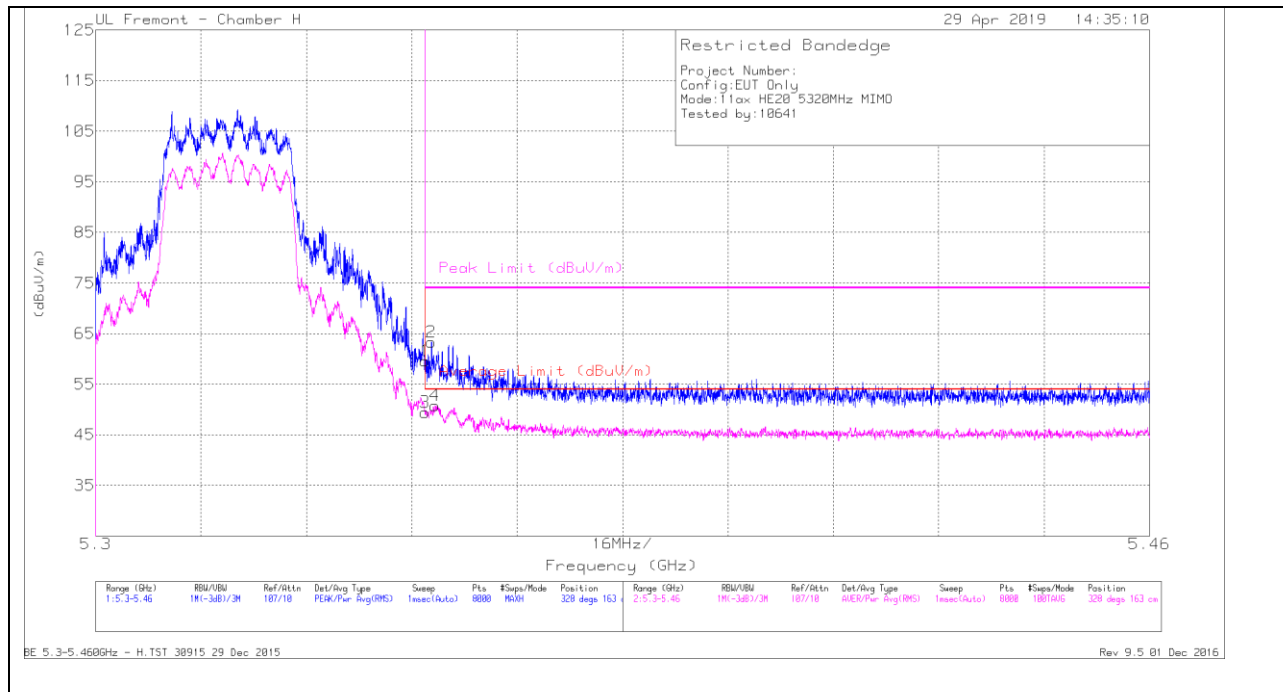BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filt/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.65	Pk	34.5	-20.5	59.65	-	-	74	-14.35	328	163	H
2	* 5.351	49.27	Pk	34.6	-20.5	63.37	-	-	74	-10.63	328	163	H
3	* 5.35	35.48	RMS	34.5	-20.5	49.48	54	-4.52	-	-	328	163	H
4	* 5.352	36.68	RMS	34.6	-20.5	50.78	54	-3.22	-	-	328	163	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


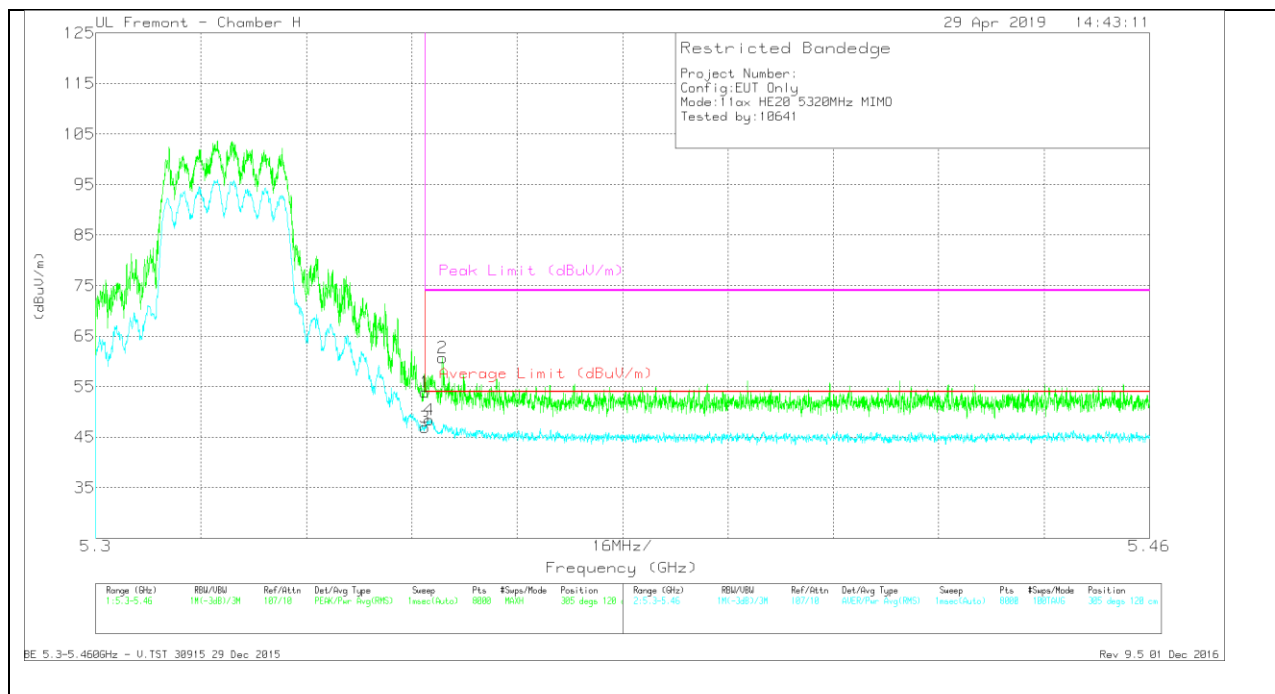


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.89	Pk	34.5	-20.5	53.89	-	-	74	-20.11	305	120	V
2	* 5.353	46.62	Pk	34.6	-20.5	60.72	-	-	74	-13.28	305	120	V
3	* 5.35	32.92	RMS	34.5	-20.5	46.92	54	-7.08	-	-	305	120	V
4	* 5.351	34.38	RMS	34.6	-20.5	48.48	54	-5.52	-	-	305	120	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

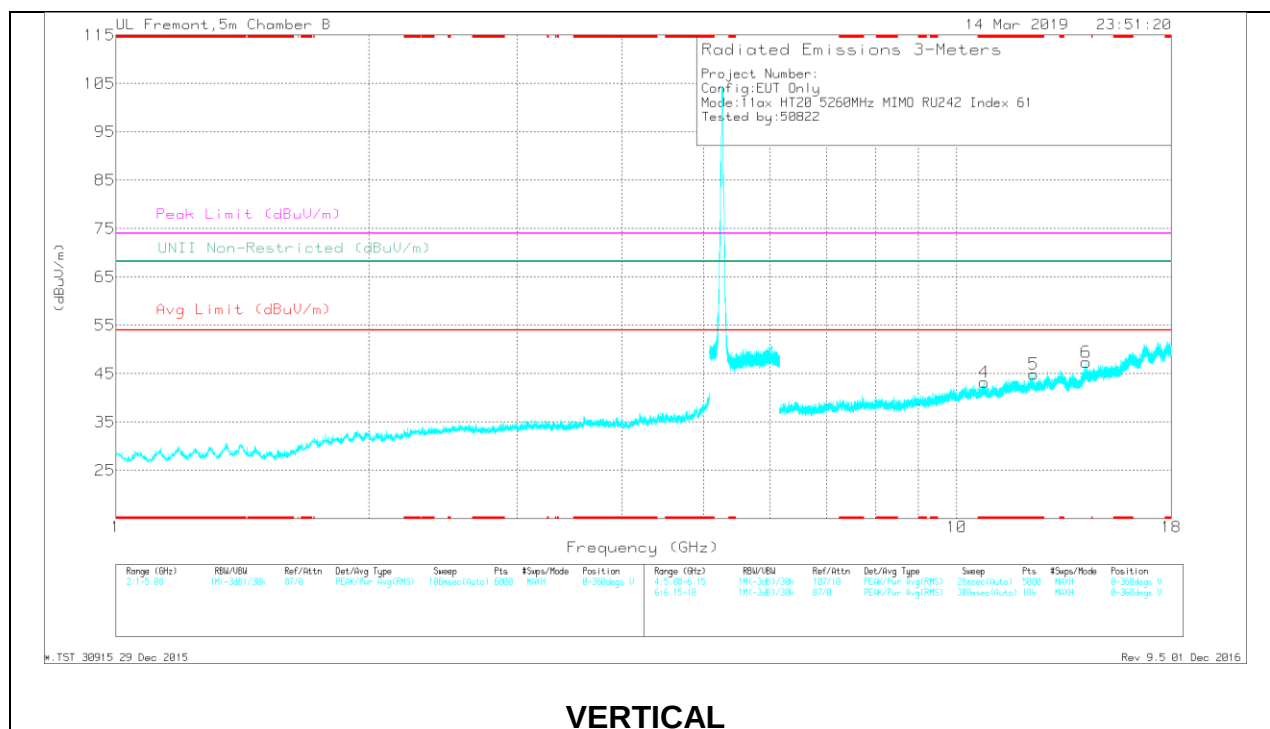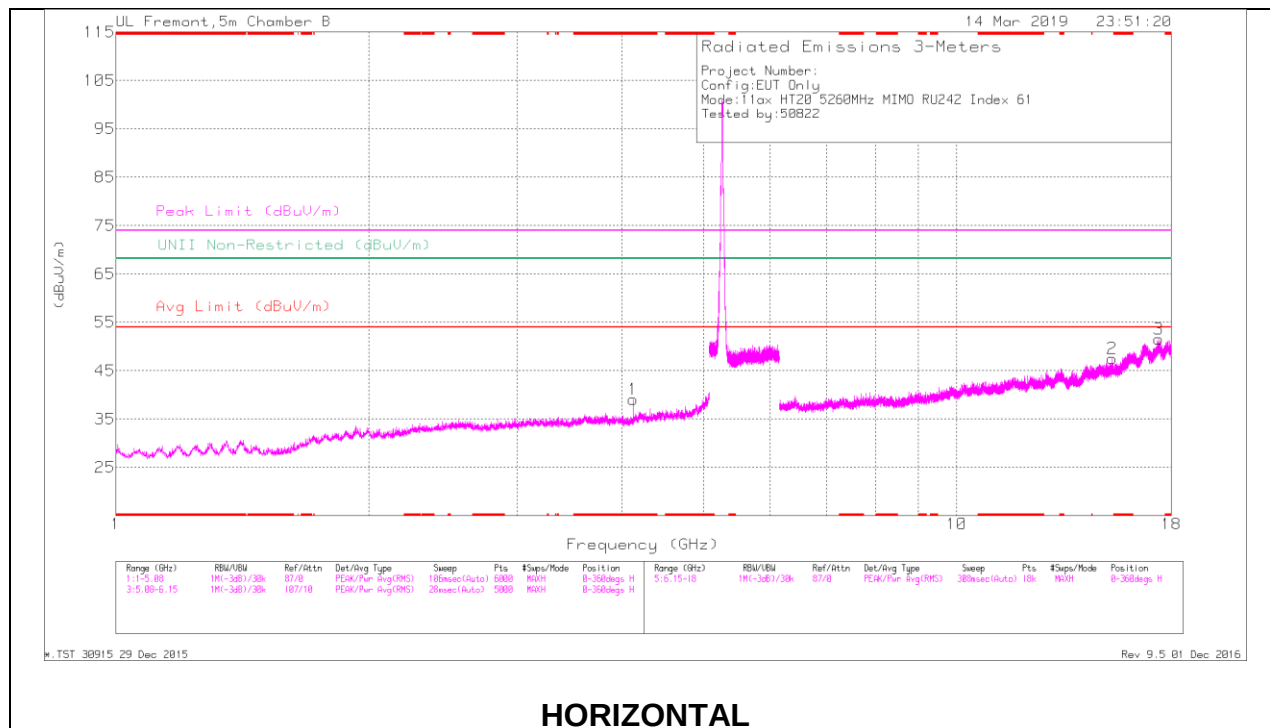HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb I/Ftr/Pa d (dB)	Correct ed Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.121	38.14	PK-U	33.6	-29.1	42.64	-	-	74	-31.36	-	-	207	153	H
	* 4.121	26.04	ADR	33.6	-29.1	30.54	54	-23.46	-	-	-	-	207	153	H
4	* 10.783	32.91	PK-U	37.9	-20.9	49.91	-	-	74	-24.09	-	-	354	291	V
	* 10.783	19.01	ADR	37.9	-20.9	36.01	54	-17.99	-	-	-	-	354	291	V
5	* 12.351	32.89	PK-U	39	-20.7	51.19	-	-	74	-22.81	-	-	10	118	V
	* 12.348	19.17	ADR	39	-20.8	37.37	54	-16.63	-	-	-	-	10	118	V
6	14.255	33.81	PK-U	40.3	-19.6	54.51	-	-	-	-	68.2	-13.69	221	305	V
2	15.304	32.19	PK-U	41.1	-18.8	54.49	-	-	-	-	68.2	-13.71	289	274	H
3	17.401	31.73	PK-U	44.2	-17.4	58.53	-	-	-	-	68.2	-9.67	256	387	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

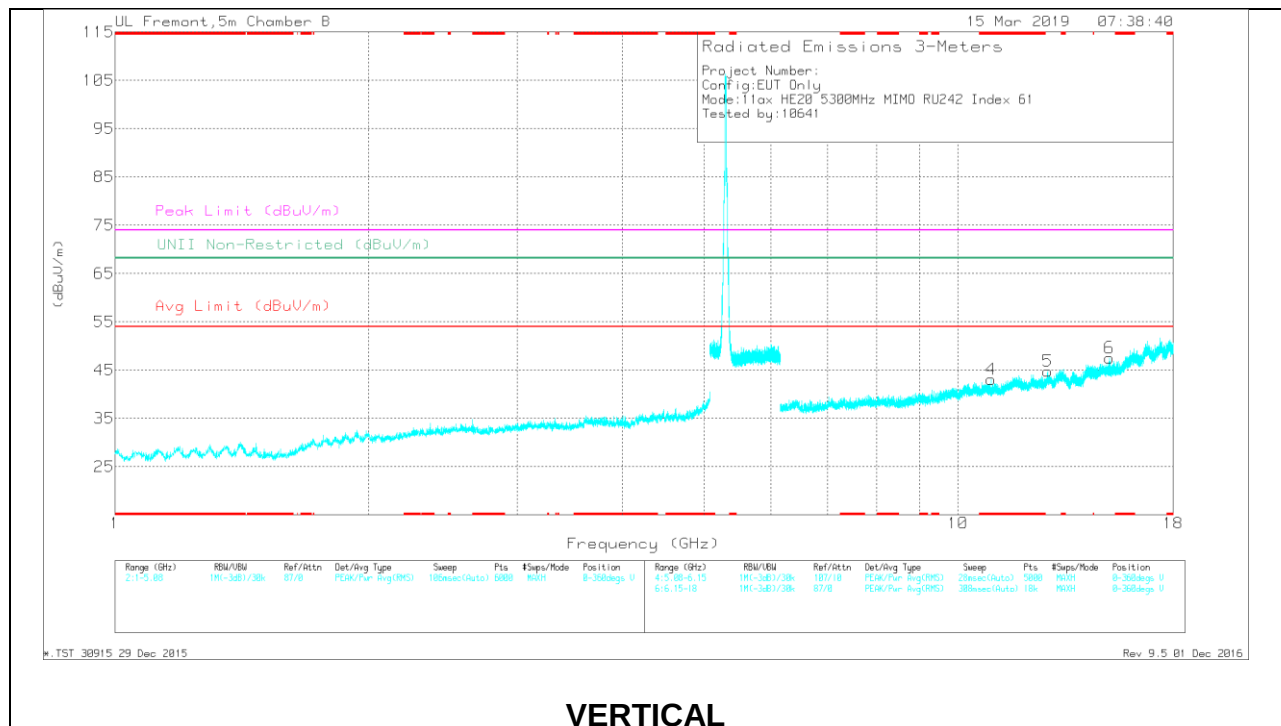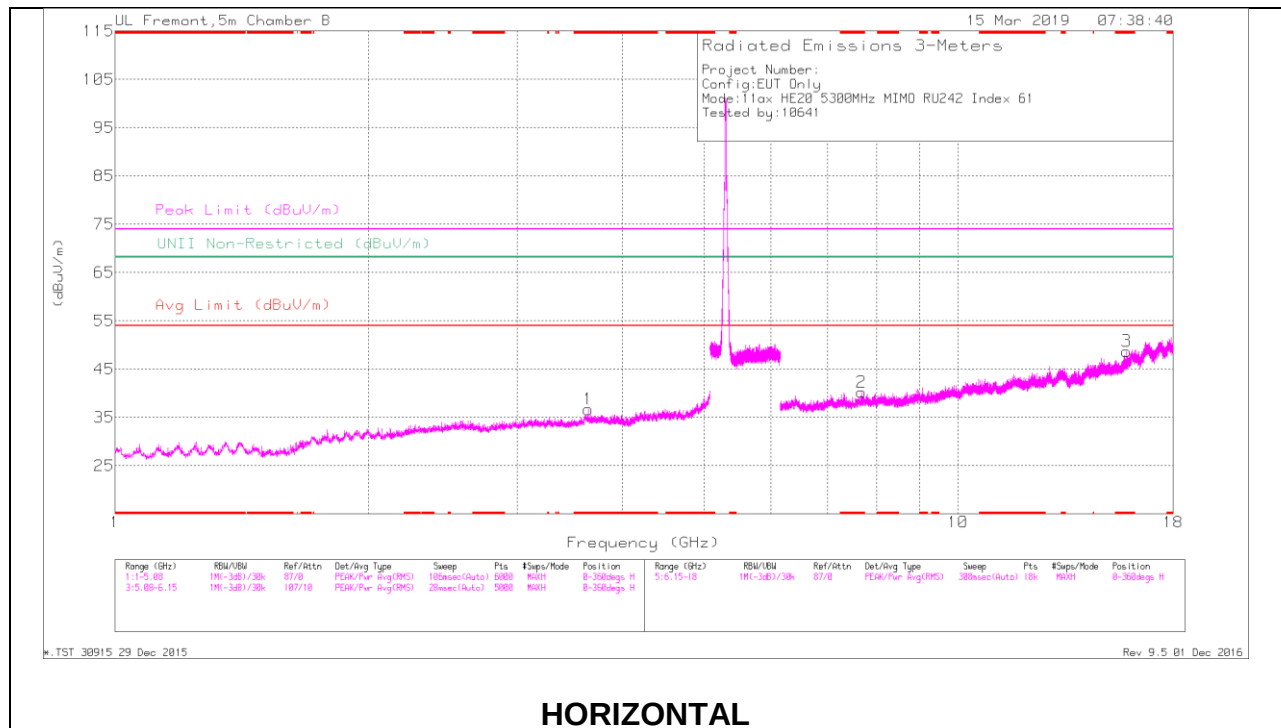

RADIATED EMISSIONS



Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb I/Ftr/Pa d (dB)	Correct ed Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.645	38.63	PK-U	33.3	-29.8	42.13	-	-	74	-31.87	-	-	53	169	H
	* 3.646	26.93	ADR	33.3	-29.9	30.33	54	-23.67	-	-	-	-	53	169	H
2	* 7.683	36.08	PK-U	36.4	-26	46.48	-	-	74	-27.52	-	-	78	185	H
	* 7.684	24.1	ADR	36.4	-26	34.5	54	-19.5	-	-	-	-	78	185	H
3	* 15.847	33.37	PK-U	42.2	-18.7	56.87	-	-	74	-17.13	-	-	110	214	H
	* 15.846	18.38	ADR	42.2	-18.7	41.88	54	-12.12	-	-	-	-	110	214	H
4	* 10.947	33.1	PK-U	38	-21.8	49.3	-	-	74	-24.7	-	-	129	205	V
	* 10.947	20.1	ADR	38	-21.8	36.3	54	-17.7	-	-	-	-	129	205	V
5	12.78	32.73	PK-U	39.3	-19.9	52.13	-	-	-	-	68.2	-16.07	102	191	V
6	15.122	32.12	PK-U	40.6	-18.3	54.42	-	-	-	-	68.2	-13.78	133	228	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

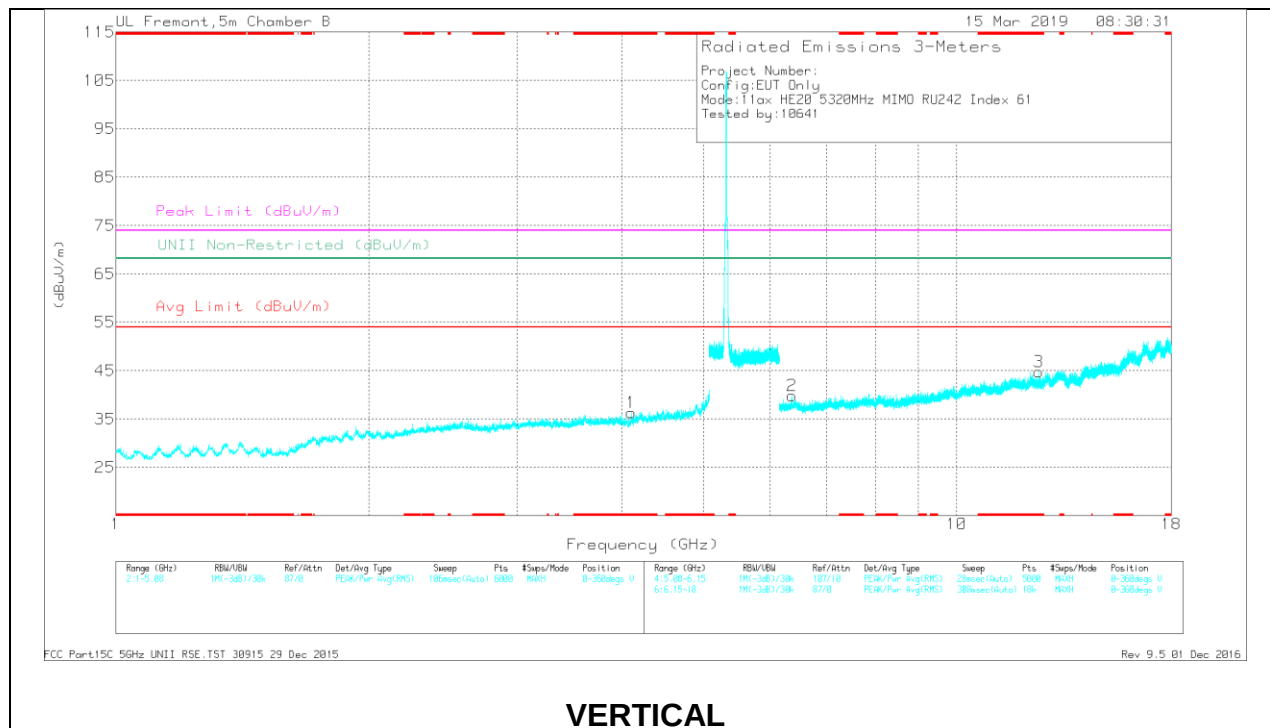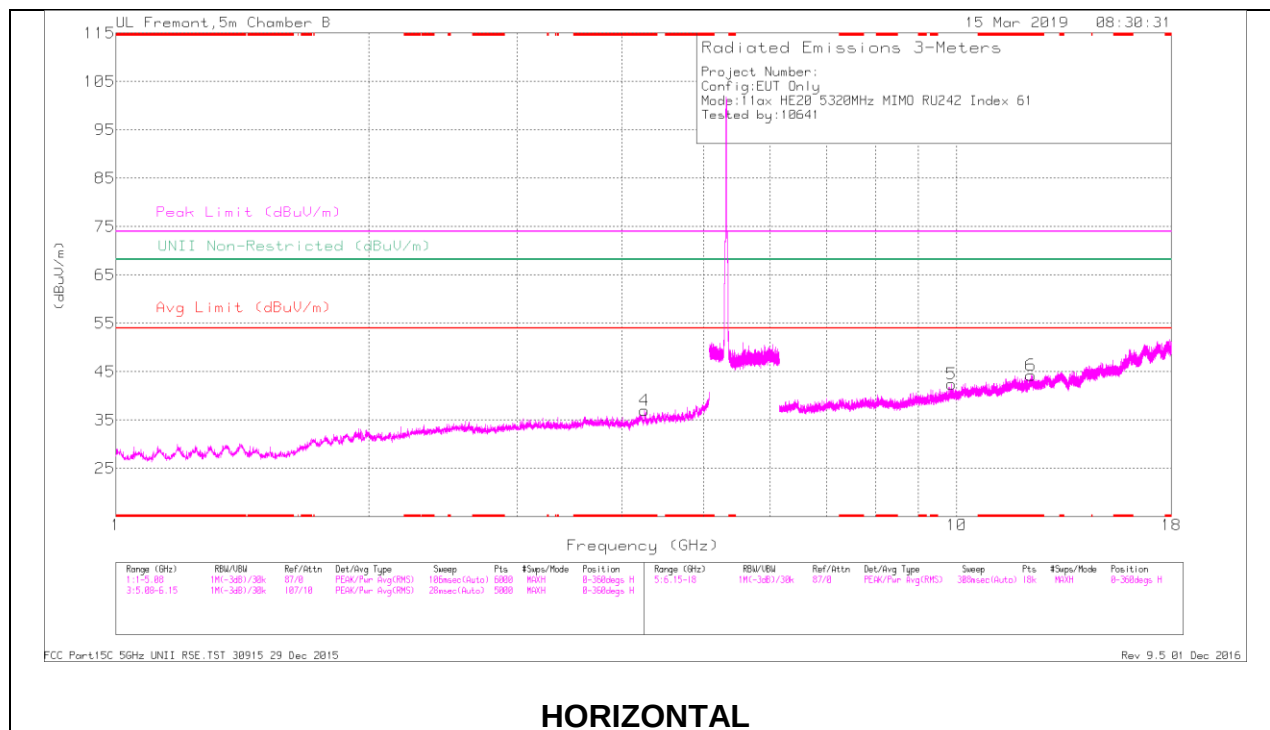


RADIATED EMISSIONS

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb I/Ftr/Pa d (dB)	Correct ed Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 4.254	38.73	PK-U	33.6	-28.3	44.03	-	-	74	-29.97	-	-	35	236	H
	* 4.256	26.61	ADR	33.6	-28.4	31.81	54	-22.19	-	-	-	-	35	236	H
1	* 4.099	38.97	PK-U	33.6	-29.6	42.97	-	-	74	-31.03	-	-	220	297	V
	* 4.097	27.29	ADR	33.6	-29.6	31.29	54	-22.71	-	-	-	-	220	297	V
6	* 12.253	32.59	PK-U	39.2	-20.1	51.69	-	-	74	-22.31	-	-	95	267	H
	* 12.254	19.55	ADR	39.2	-20.1	38.65	54	-15.35	-	-	-	-	95	267	H
3	* 12.525	32.45	PK-U	39.1	-20.5	51.05	-	-	74	-22.95	-	-	172	255	V
	* 12.525	19.89	ADR	39.1	-20.5	38.49	54	-15.51	-	-	-	-	172	255	V
2	6.364	37.32	PK-U	35.7	-26.6	46.42	-	-	-	-	68.2	-21.78	142	233	V
5	9.853	34.65	PK-U	37.3	-22.2	49.75	-	-	-	-	68.2	-18.45	79	288	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

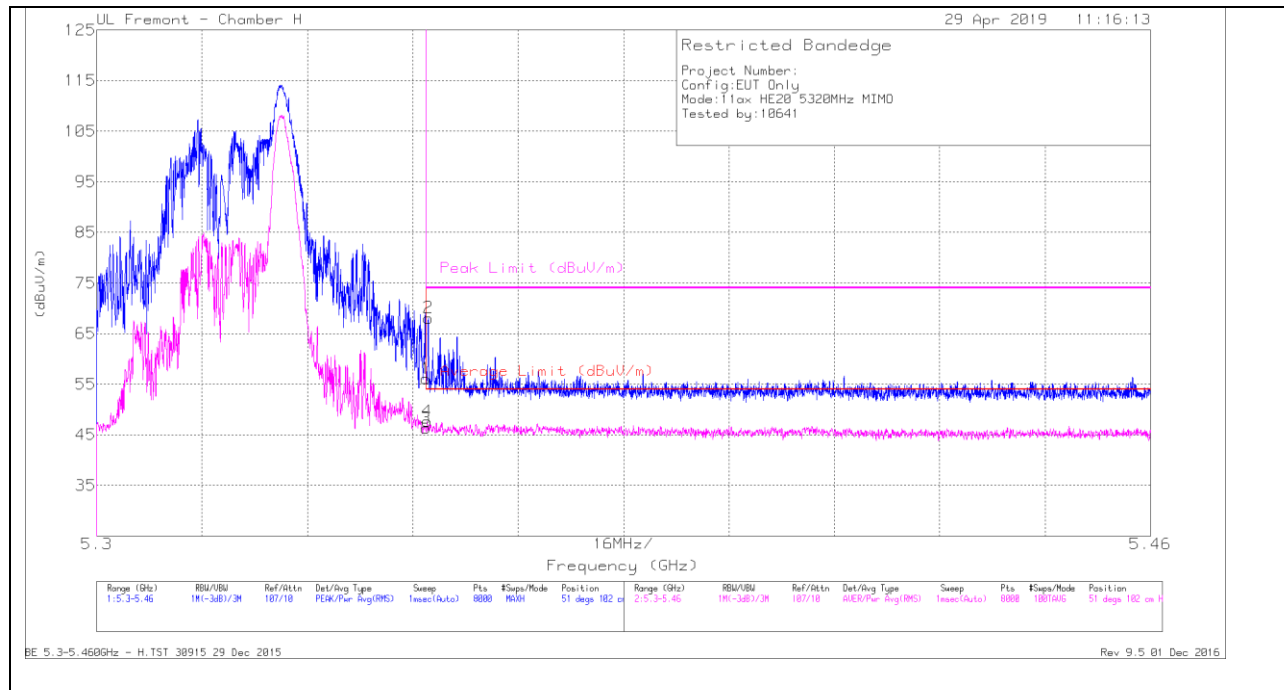BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.17	Pk	34.5	-20.5	56.17	-	-	74	-17.83	51	102	H
2	* 5.35	54.01	Pk	34.6	-20.5	68.11	-	-	74	-5.89	51	102	H
3	* 5.35	32.28	RMS	34.5	-20.5	46.28	54	-7.72	-	-	51	102	H
4	* 5.35	33.61	RMS	34.6	-20.5	47.71	54	-6.29	-	-	51	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


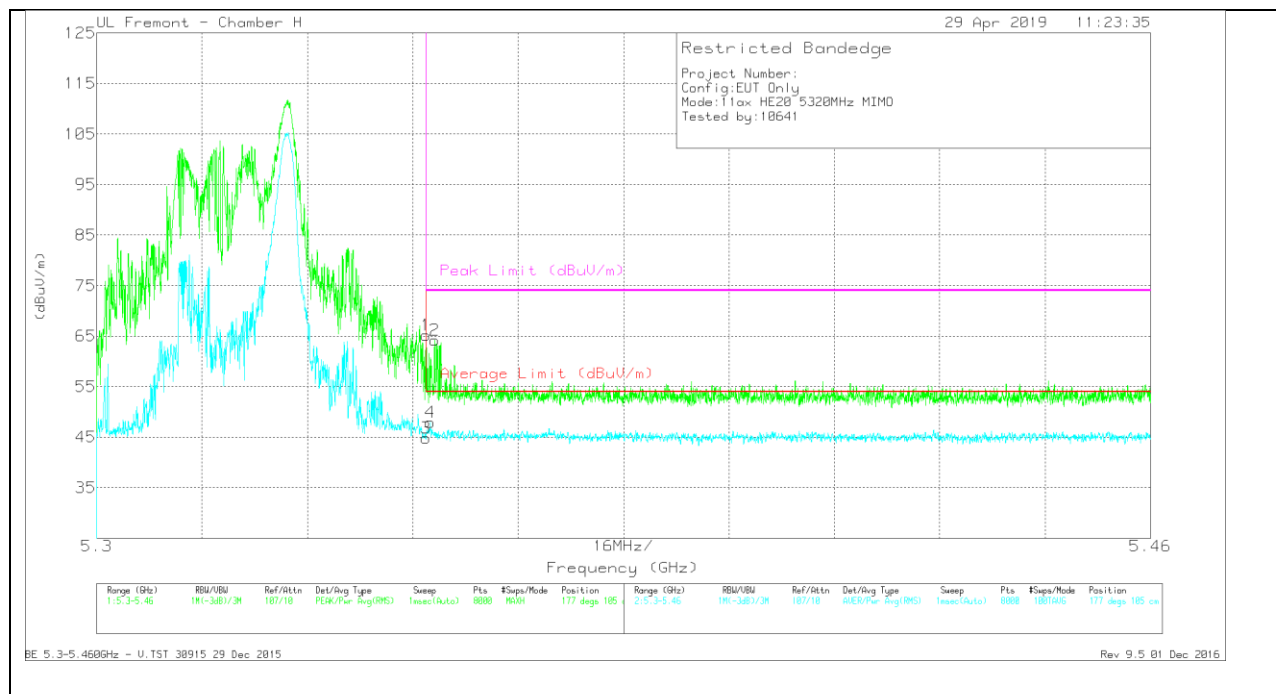


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	51.2	Pk	34.5	-20.5	65.2	-	-	74	-8.8	177	105	V
2	* 5.351	50.15	Pk	34.6	-20.5	64.25	-	-	74	-9.75	177	105	V
3	* 5.35	30.88	RMS	34.5	-20.5	44.88	54	-9.12	-	-	177	105	V
4	* 5.351	33.82	RMS	34.6	-20.5	47.92	54	-6.08	-	-	177	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

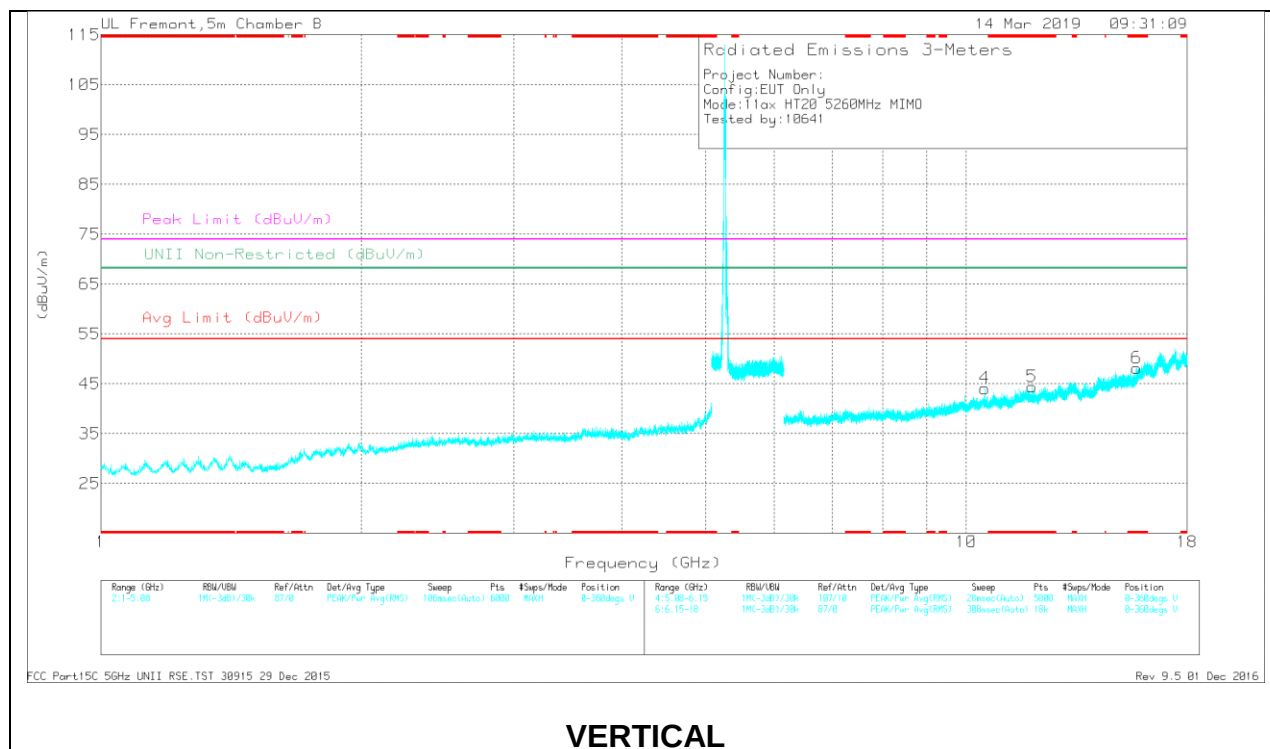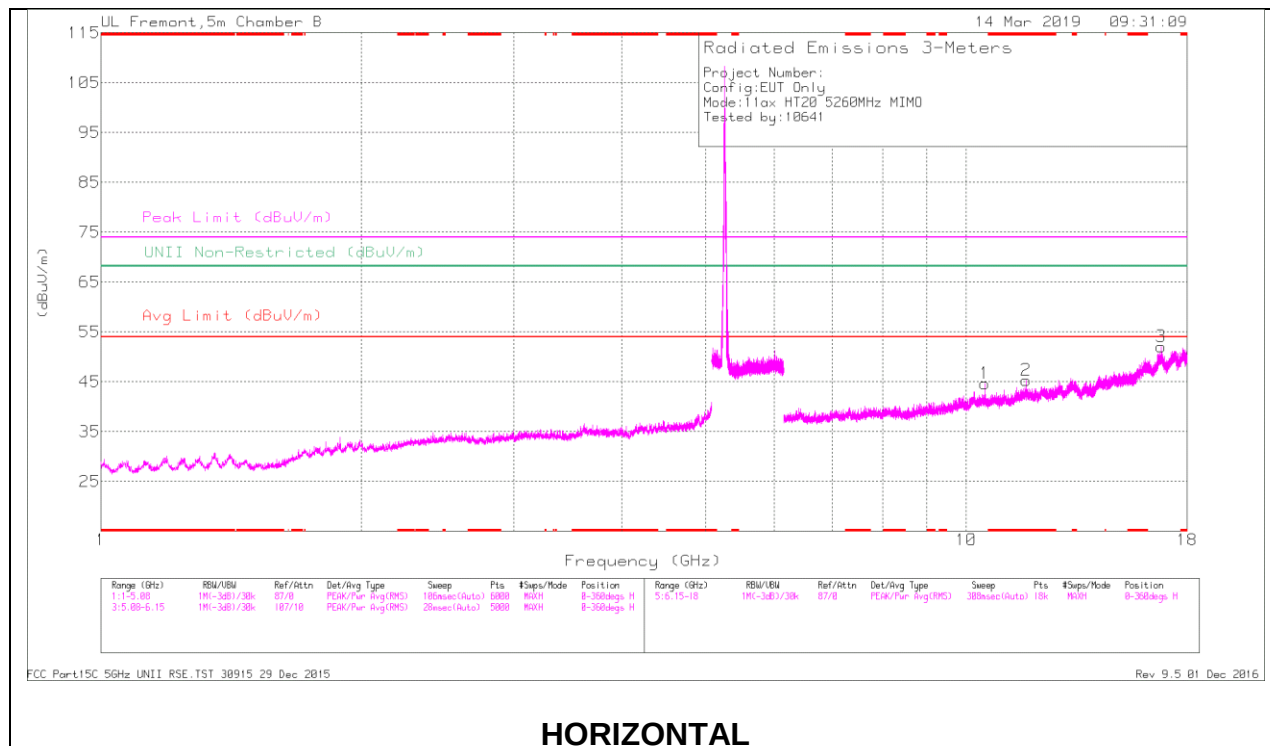HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 11.723	32.21	PK-U	39	-20.7	50.51	-	-	74	-23.49	-	-	105	243	H
	* 11.723	19.3	ADR	39	-20.6	37.7	54	-16.3	-	-	-	-	105	243	H
5	* 11.918	33.33	PK-U	38.9	-20.9	51.33	-	-	74	-22.67	-	-	109	152	V
	* 11.921	20.14	ADR	38.8	-20.9	38.04	54	-15.96	-	-	-	-	109	152	V
6	* 15.735	32.09	PK-U	41.7	-18.8	54.99	-	-	74	-19.01	-	-	150	169	V
	* 15.736	18.61	ADR	41.7	-18.8	41.51	54	-12.49	-	-	-	-	150	169	V
1	10.503	35.37	PK-U	37.8	-21.2	51.97	-	-	-	-	68.2	-16.23	256	106	H
4	10.503	36.19	PK-U	37.8	-21.2	52.79	-	-	-	-	68.2	-15.41	164	188	V
3	16.812	32.34	PK-U	44.5	-17.7	59.14	-	-	-	-	68.2	-9.06	78	368	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

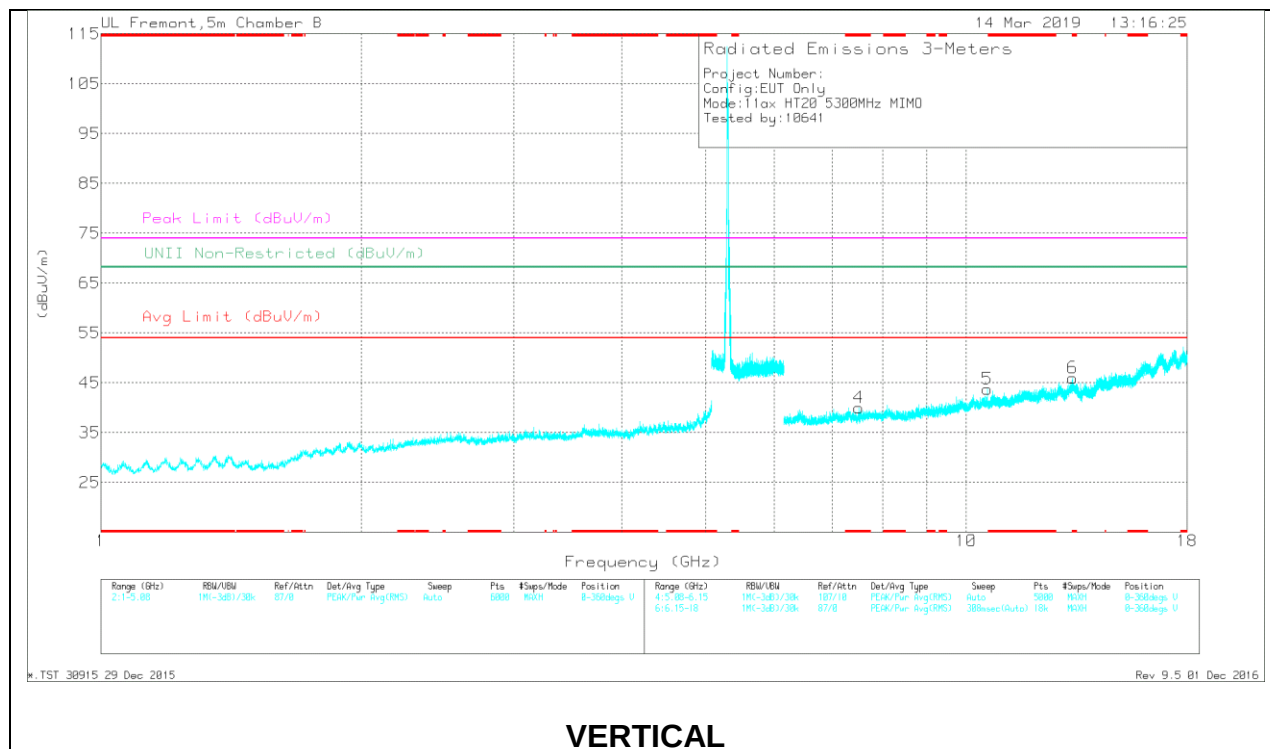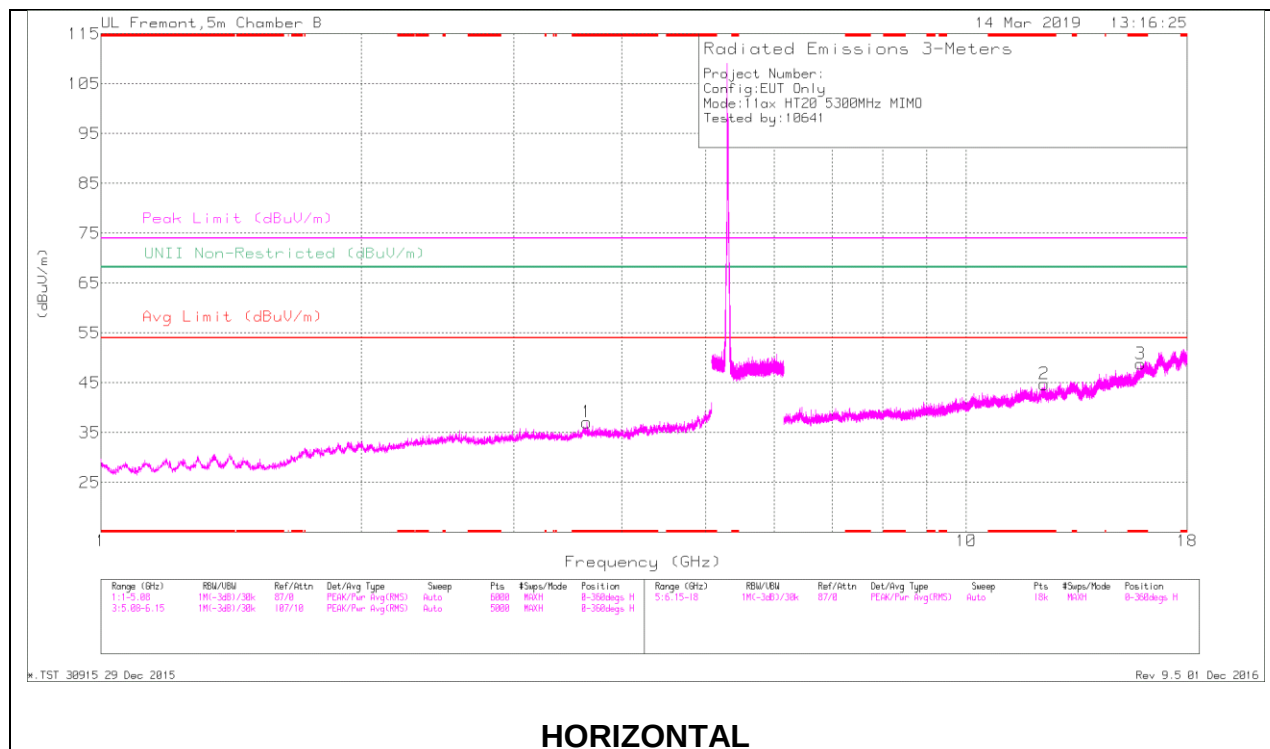

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/CbIf/Tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.642	39.29	PK-U	33.3	-29.8	42.79	-	-	74	-31.21	-	-	5	299	H
	* 3.643	26.77	ADR	33.3	-29.8	30.27	54	-23.73	-	-	-	-	5	299	H
2	* 12.297	32.48	PK-U	39.1	-19.9	51.68	-	-	74	-22.32	-	-	38	225	H
	* 12.298	19.92	ADR	39.1	-20	39.02	54	-14.98	-	-	-	-	38	225	H
3	* 15.907	32.22	PK-U	42.2	-18.1	56.32	-	-	74	-17.68	-	-	68	140	H
	* 15.908	18.23	ADR	42.2	-18.1	42.33	54	-11.67	-	-	-	-	68	140	H
4	* 7.506	36.38	PK-U	36.1	-25.8	46.68	-	-	74	-27.32	-	-	84	153	V
	* 7.506	23.88	ADR	36.1	-25.8	34.18	54	-19.82	-	-	-	-	84	153	V
6	* 13.275	32.3	PK-U	40.7	-20.7	52.3	-	-	74	-21.7	-	-	155	201	V
	* 13.276	19.82	ADR	40.7	-20.7	39.82	54	-14.18	-	-	-	-	155	201	V
5	10.584	34.87	PK-U	37.8	-21.7	50.97	-	-	-	-	68.2	-17.23	121	254	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 10.624	35.07	PK-U	37.8	-21.9	50.97	-	-	74	-23.03	-	-	262	116	H
	* 10.623	22.56	ADR	37.8	-21.9	38.46	54	-15.54	-	-	-	-	262	116	H
2	* 10.623	35.65	PK-U	37.8	-21.9	51.55	-	-	74	-22.45	-	-	115	205	V
	* 10.623	24.78	ADR	37.8	-21.9	40.68	54	-13.32	-	-	-	-	115	205	V
3	* 15.793	32.69	PK-U	42.1	-18.7	56.09	-	-	74	-17.91	-	-	303	275	V
	* 15.791	18.64	ADR	42.1	-18.8	41.94	54	-12.06	-	-	-	-	303	275	V
1	1.713	40.54	PK-U	29.7	-31.8	38.44	-	-	-	-	68.2	-29.76	160	248	V
6	9.596	33.62	PK-U	37.1	-22.8	47.92	-	-	-	-	68.2	-20.28	242	170	H
5	15.338	32.17	PK-U	41	-19	54.17	-	-	-	-	68.2	-14.03	193	208	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

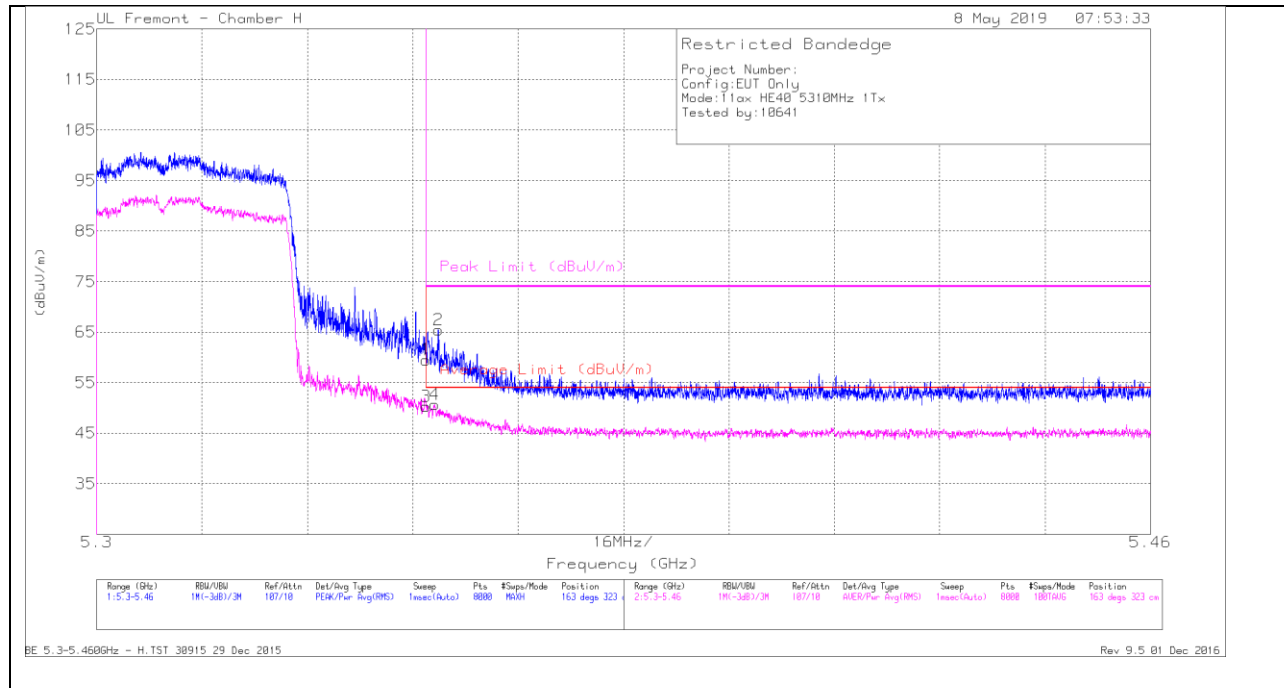1.1.11. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.3 GHz BAND**1TX Antenna 4 MODE – 484 Tones, RU Index 65****BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.54	Pk	34.5	-20.5	59.54	-	-	74	-14.46	163	323	H
2	* 5.352	51.31	Pk	34.6	-20.5	65.41	-	-	74	-8.59	163	323	H
3	* 5.35	36.31	RMS	34.5	-20.5	50.31	54	-3.69	-	-	163	323	H
4	* 5.351	36.51	RMS	34.6	-20.5	50.61	54	-3.39	-	-	163	323	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

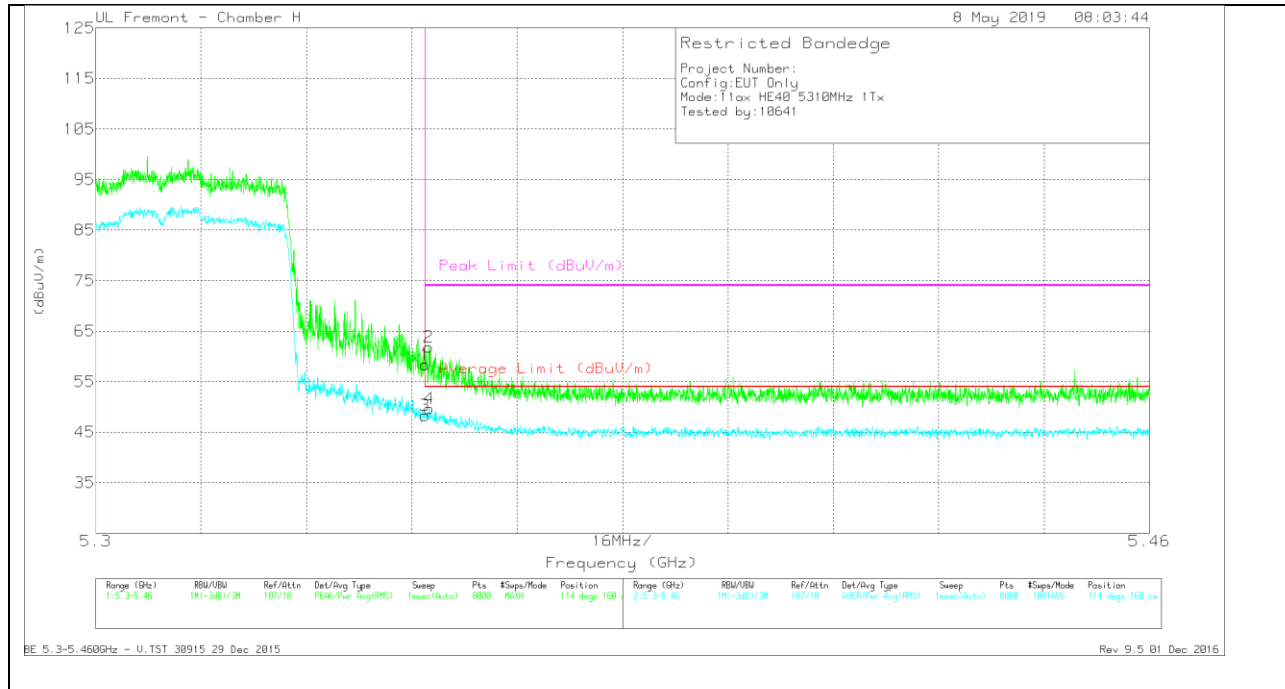


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.35	Pk	34.5	-20.5	58.35	-	-	74	-15.65	114	160	V
2	* 5.351	47.78	Pk	34.6	-20.5	61.88	-	-	74	-12.12	114	160	V
3	* 5.35	34.28	RMS	34.5	-20.5	48.28	54	-5.72	-	-	114	160	V
4	* 5.351	35.53	RMS	34.6	-20.5	49.63	54	-4.37	-	-	114	160	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

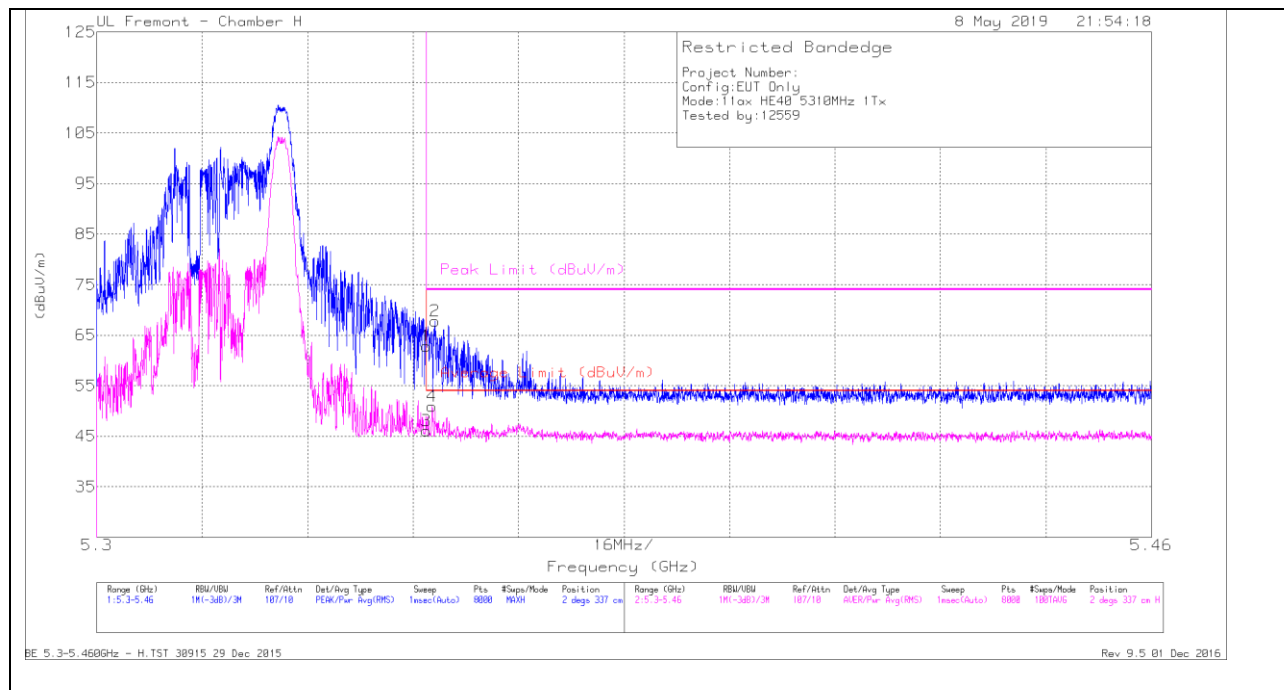1TX Antenna 4 MODE – 26 Tones, RU Index 17**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dBm)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	48.8	Pk	34.5	-20.5	62.8	-	-	74	-11.2	2	337	H
2	* 5.351	53.73	Pk	34.6	-20.5	67.83	-	-	74	-6.17	2	337	H
3	* 5.35	32.07	RMS	34.5	-20.5	46.07	54	-7.93	-	-	2	337	H
4	* 5.351	36.81	RMS	34.6	-20.5	50.91	54	-3.09	-	-	2	337	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

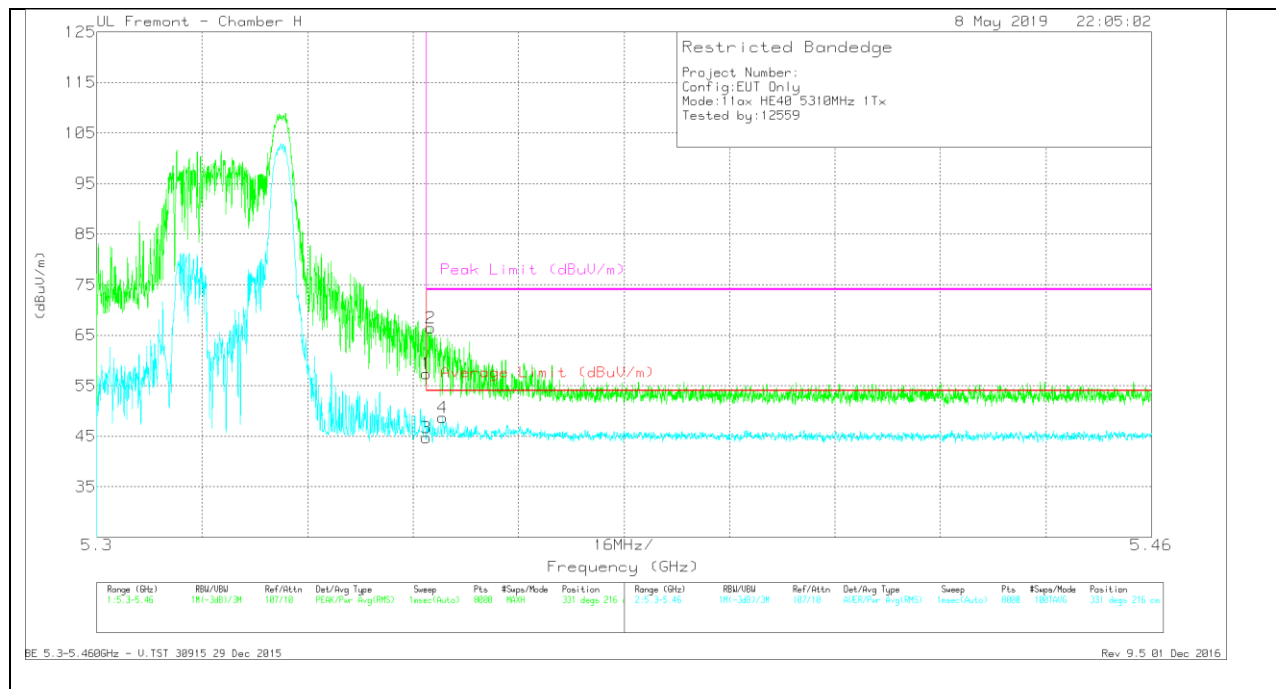


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.33	Pk	34.5	-20.5	57.33	-	-	74	-16.67	331	216	V
2	* 5.351	52.37	Pk	34.6	-20.5	66.47	-	-	74	-7.53	331	216	V
3	* 5.35	30.68	RMS	34.5	-20.5	44.68	54	-9.32	-	-	331	216	V
4	* 5.352	34.57	RMS	34.6	-20.5	48.67	54	-5.33	-	-	331	216	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

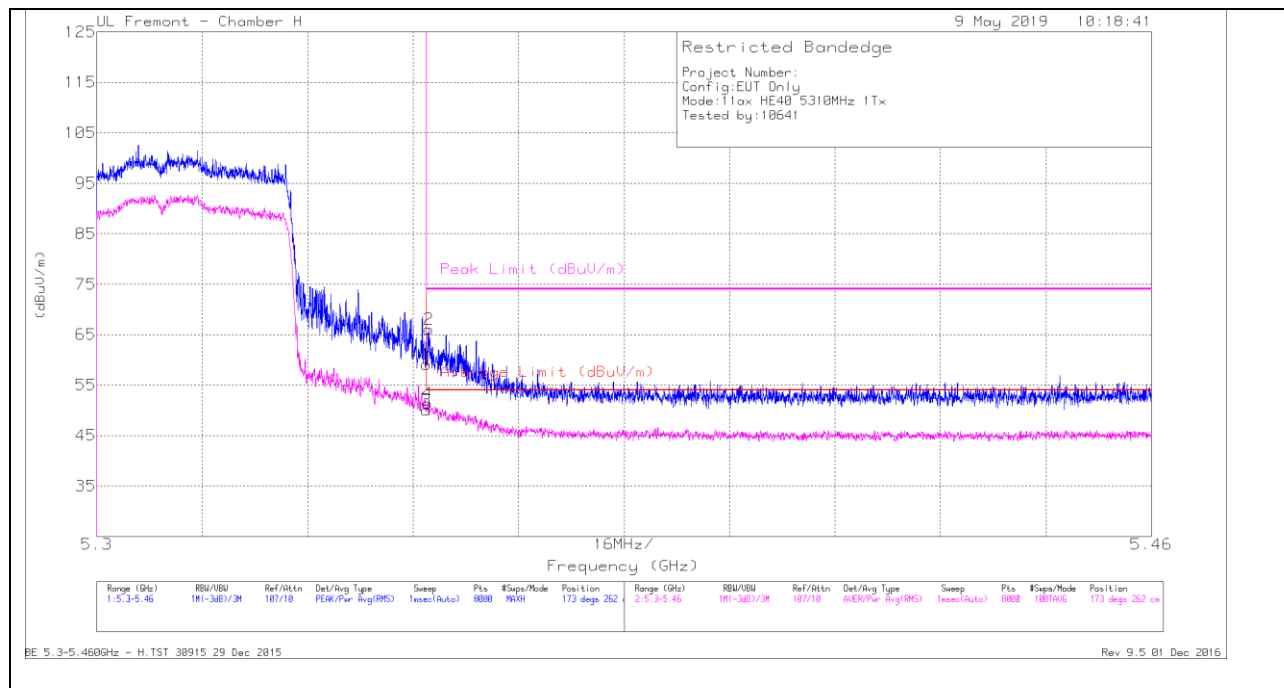1TX Antenna 5 MODE – 484 Tones, RU Index 65**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.05	Pk	34.5	-20.5	59.05	-	-	74	-14.95	173	262	H
2	* 5.35	51.92	Pk	34.6	-20.5	66.02	-	-	74	-7.98	173	262	H
3	* 5.35	35.99	RMS	34.5	-20.5	49.99	54	-4.01	-	-	173	262	H
4	* 5.35	37.28	RMS	34.6	-20.5	51.38	54	-2.62	-	-	173	262	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

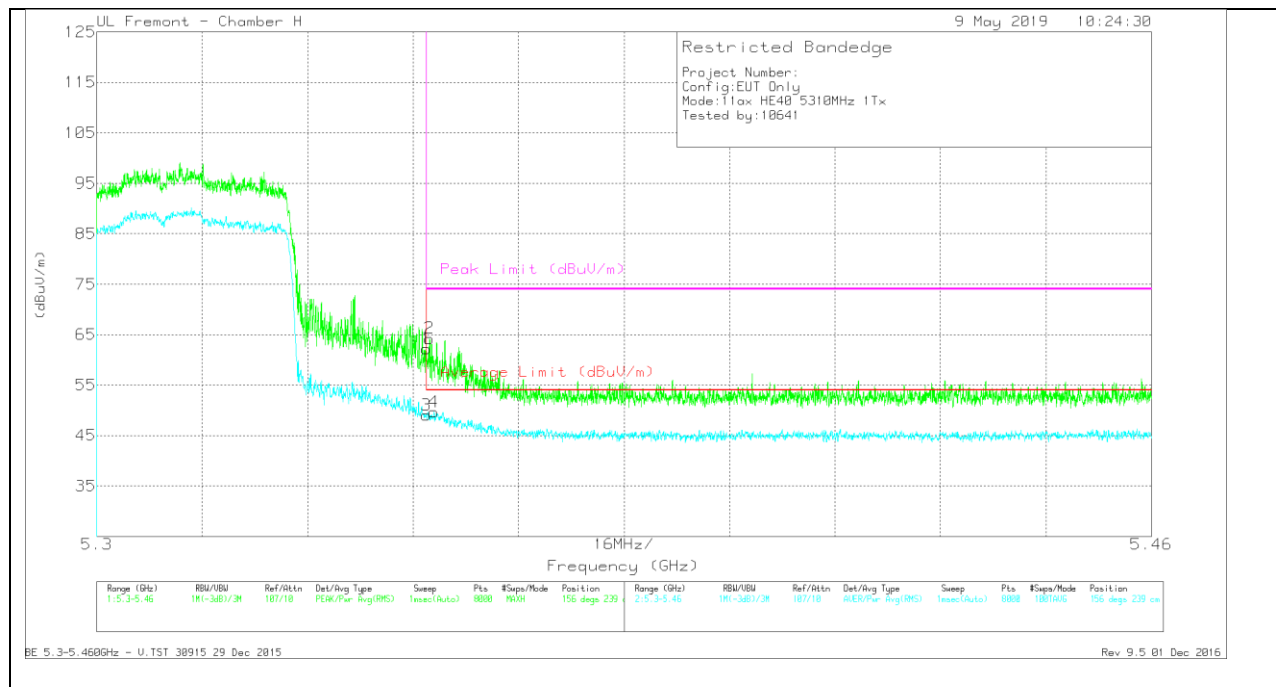


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtri/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	48.2	Pk	34.5	-20.5	62.2	-	-	74	-11.8	156	239	V
2	* 5.351	50.16	Pk	34.6	-20.5	64.26	-	-	74	-9.74	156	239	V
3	* 5.35	35.08	RMS	34.5	-20.5	49.08	54	-4.92	-	-	156	239	V
4	* 5.351	35.62	RMS	34.6	-20.5	49.72	54	-4.28	-	-	156	239	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

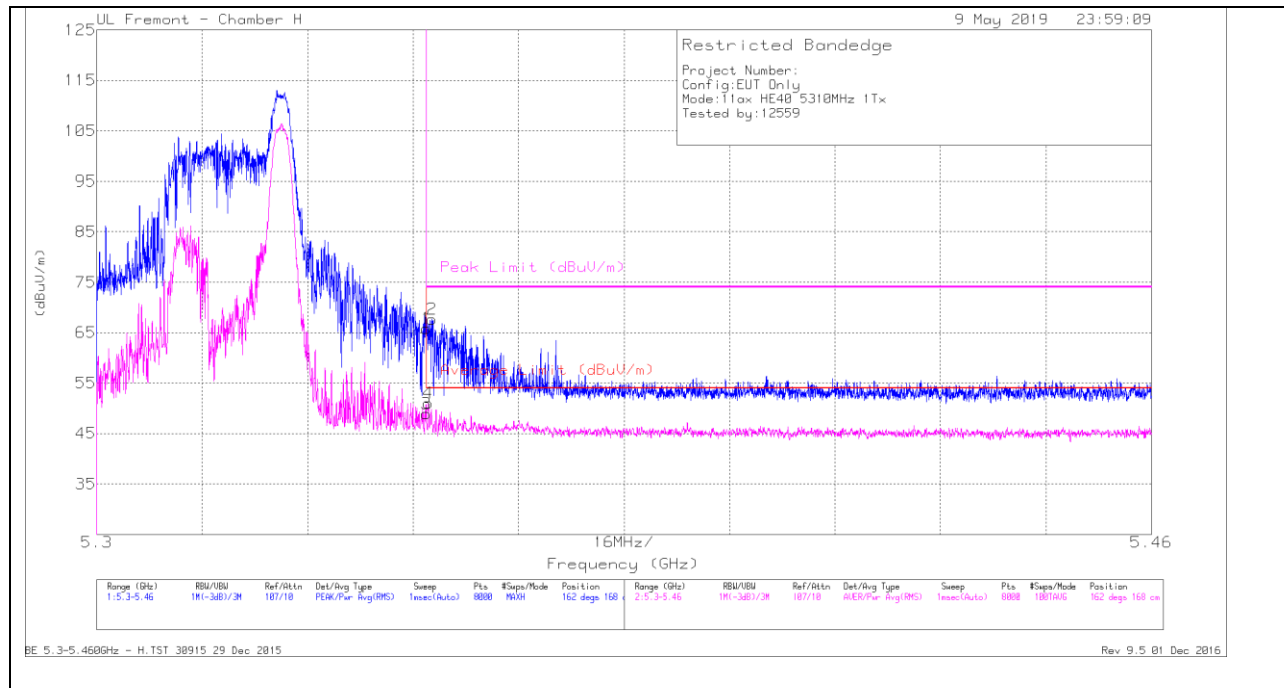1TX Antenna 5 MODE – 26 Tones, RU Index 17**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	51.85	Pk	34.5	-20.5	65.85	-	-	74	-8.15	162	168	H
3	* 5.35	34.94	RMS	34.5	-20.5	48.94	54	-5.06	-	-	162	168	H
4	* 5.35	36.99	RMS	34.6	-20.5	51.09	54	-2.91	-	-	162	168	H
2	* 5.351	53.55	Pk	34.6	-20.5	67.65	-	-	74	-6.35	162	168	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

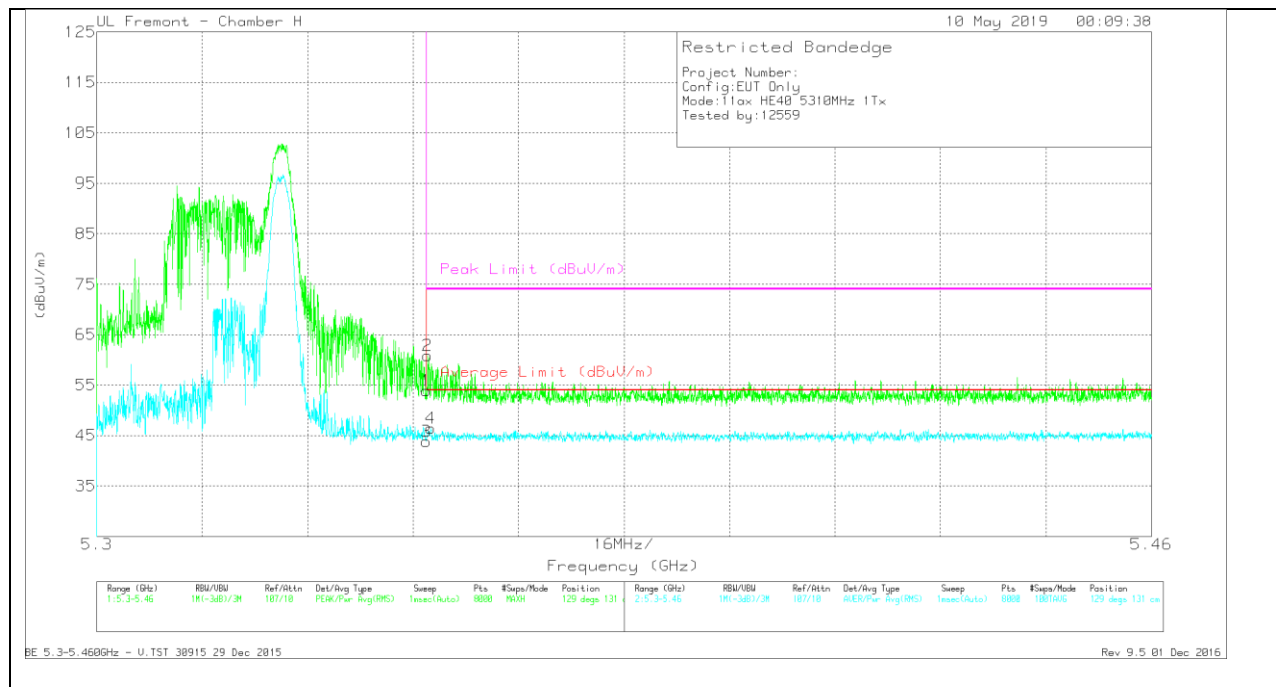


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/CbI/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.85	Pk	34.5	-20.5	53.85	-	-	74	-20.15	129	131	V
2	* 5.35	46.75	Pk	34.6	-20.5	60.85	-	-	74	-13.15	129	131	V
3	* 5.35	29.86	RMS	34.5	-20.5	43.86	54	-10.14	-	-	129	131	V
4	* 5.351	32.29	RMS	34.6	-20.5	46.39	54	-7.61	-	-	129	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

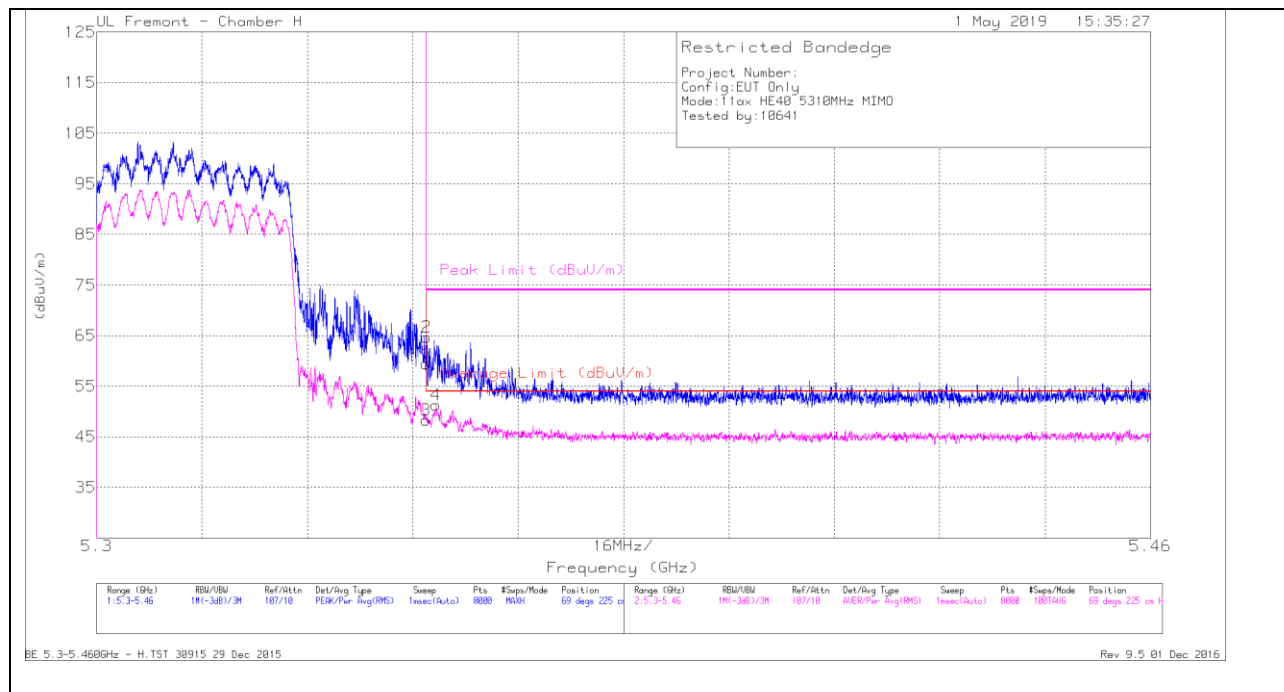BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.53	Pk	34.5	-20.5	59.53	-	-	74	-14.47	69	225	H
2	* 5.35	50.54	Pk	34.6	-20.5	64.64	-	-	74	-9.36	69	225	H
3	* 5.35	34.36	RMS	34.5	-20.5	48.36	54	-5.64	-	-	69	225	H
4	* 5.352	37.16	RMS	34.6	-20.5	51.26	54	-2.74	-	-	69	225	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


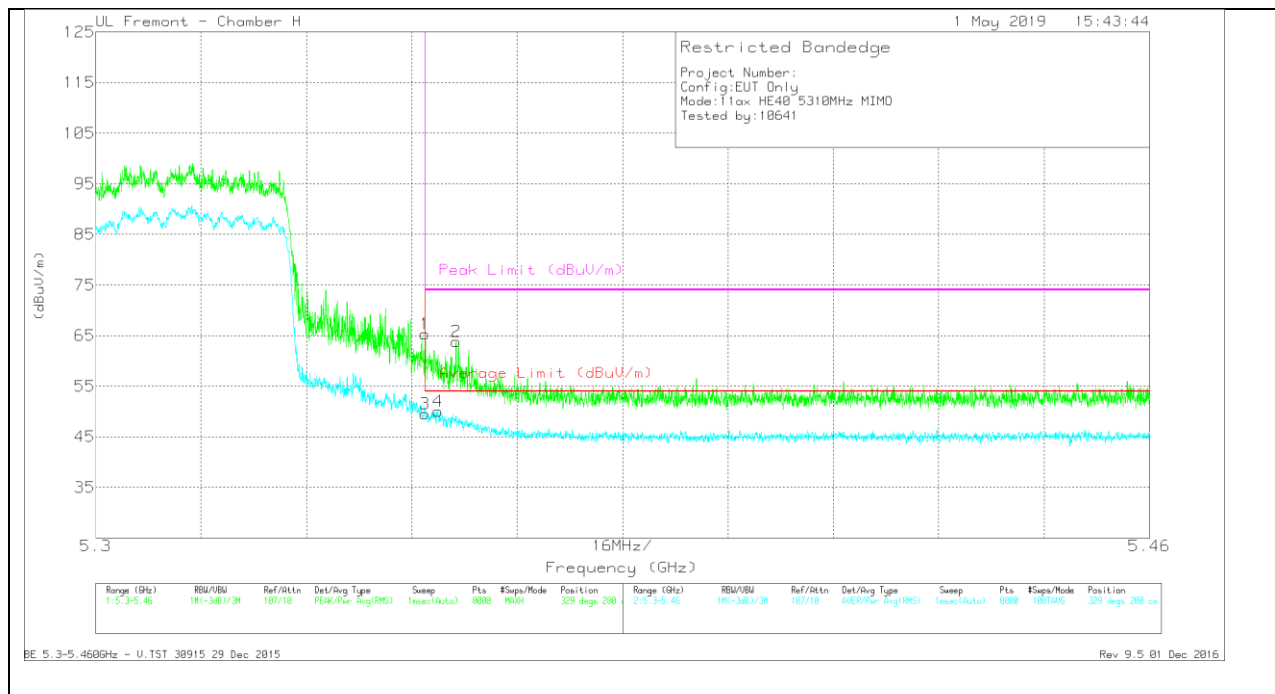


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtri/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	51.27	Pk	34.5	-20.5	65.27	-	-	74	-8.73	329	280	V
2	* 5.355	49.77	Pk	34.6	-20.5	63.87	-	-	74	-10.13	329	280	V
3	* 5.35	35.49	RMS	34.5	-20.5	49.49	54	-4.51	-	-	329	280	V
4	* 5.352	35.98	RMS	34.6	-20.5	50.08	54	-3.92	-	-	329	280	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

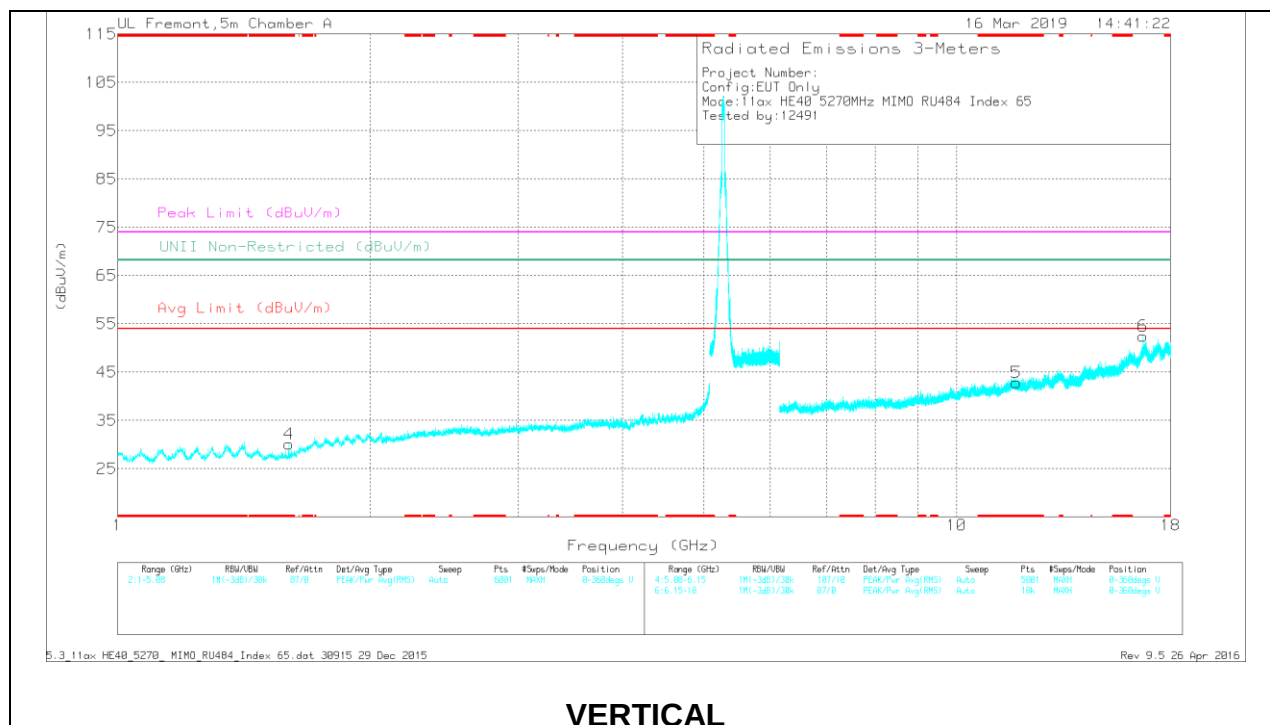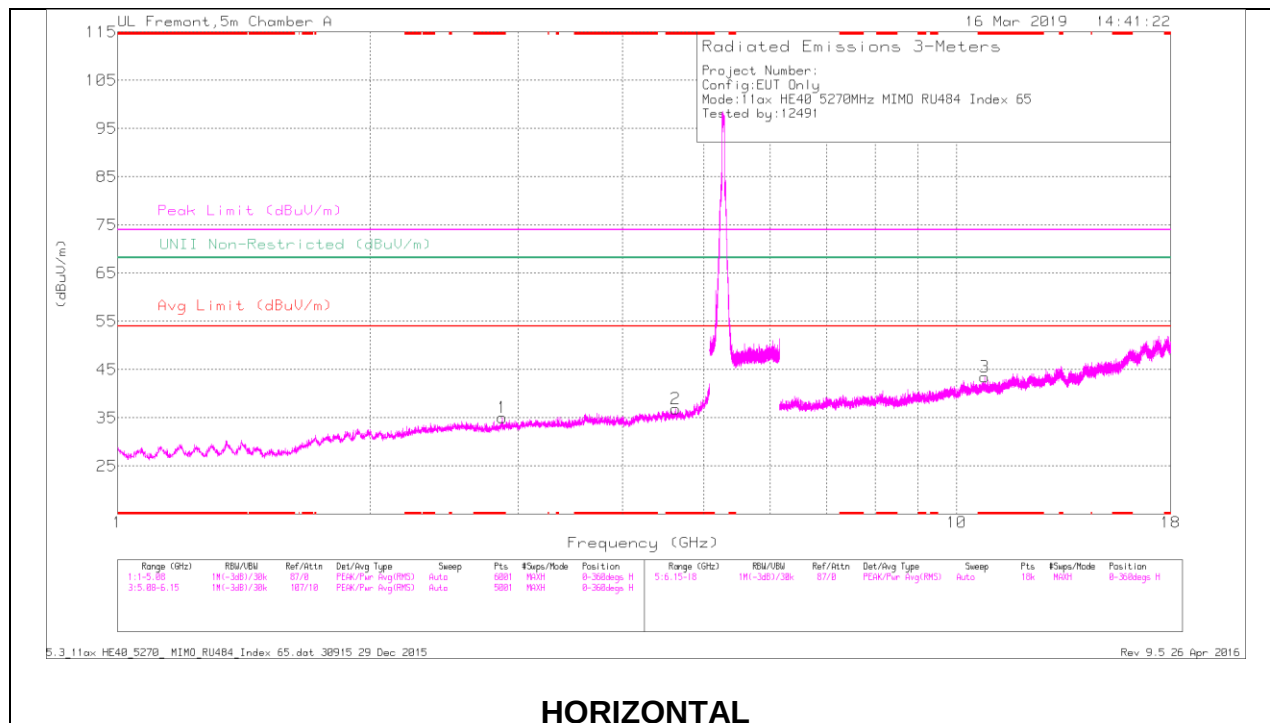HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb I/Filtr/Pa d (dB)	Correct ed Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.878	39.03	PK-U	32.6	-30.3	41.33	-	-	74	-32.67	-	-	22	186	H
	* 2.877	27.38	ADR	32.6	-30.4	29.58	54	-24.42	-	-	-	-	22	186	H
2	* 4.627	37.94	PK-U	34.1	-28.1	43.94	-	-	74	-30.06	-	-	197	133	H
	* 4.627	26.15	ADR	34.1	-28.1	32.15	54	-21.85	-	-	-	-	197	133	H
4	* 1.6	41.91	PK-U	27.7	-32.9	36.71	-	-	74	-37.29	-	-	281	196	V
	* 1.601	29.42	ADR	27.7	-32.9	24.22	54	-29.78	-	-	-	-	281	196	V
3	* 10.802	33.43	PK-U	37.9	-21.1	50.23	-	-	74	-23.77	-	-	9	243	H
	* 10.8	19.89	ADR	37.9	-21.1	36.69	54	-17.31	-	-	-	-	9	243	H
5	* 11.786	32.65	PK-U	39.1	-21.1	50.65	-	-	74	-23.35	-	-	184	222	V
	* 11.788	19.81	ADR	39.1	-21.1	37.81	54	-16.19	-	-	-	-	184	222	V
6	16.7	32.18	PK-U	44.4	-17.5	59.08	-	-	-	-	68.2	-9.12	242	121	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


HIGH CHANNEL RESULTS

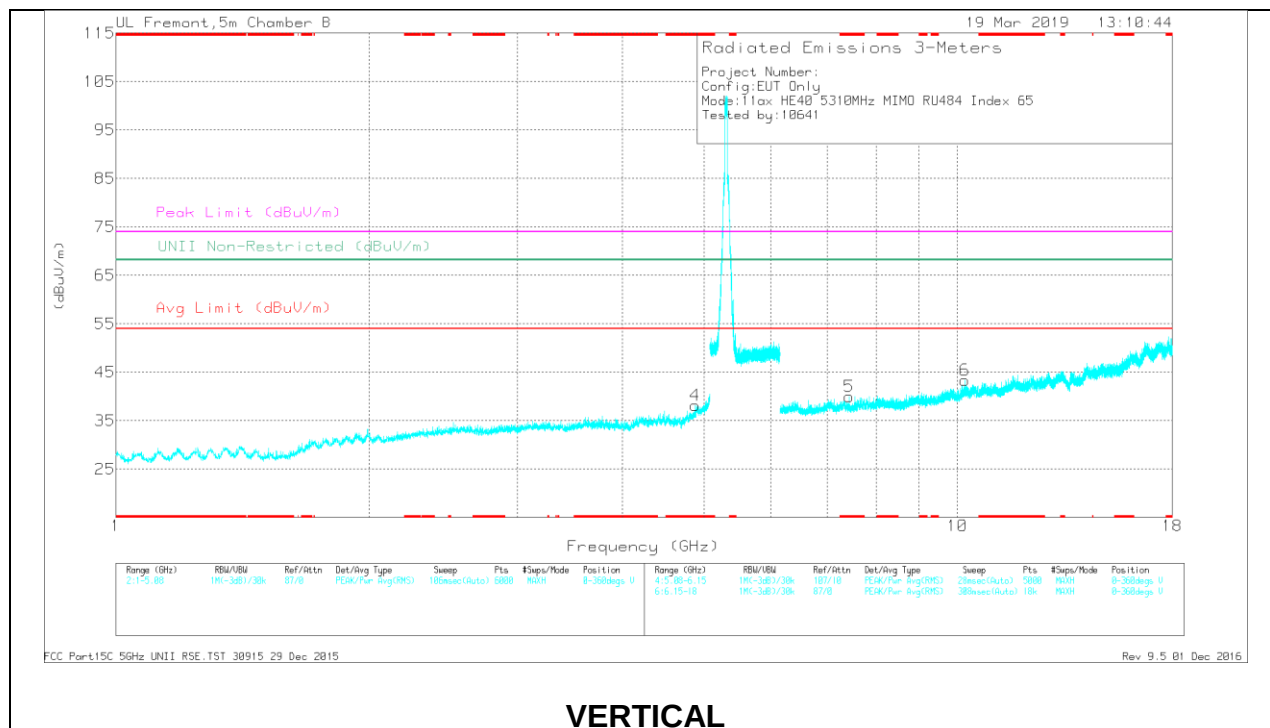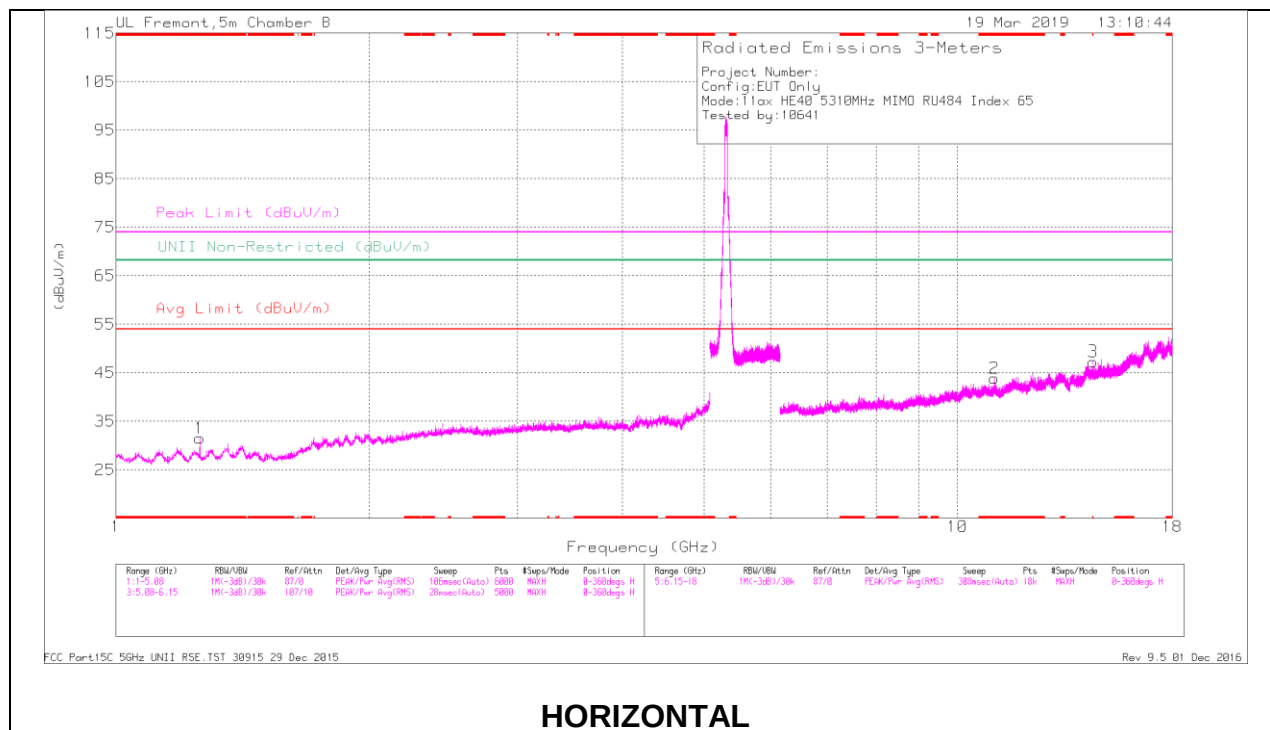

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.256	41.97	PK-U	28.3	-33.6	36.67	-	-	74	-37.33	-	-	72	260	H
	* 1.254	29.23	ADR	28.3	-33.6	23.93	54	-30.07	-	-	-	-	72	260	H
4	* 4.877	37.97	PK-U	34.3	-27.9	44.37	-	-	74	-29.63	-	-	125	231	V
	* 4.875	26.31	ADR	34.3	-28	32.61	54	-21.39	-	-	-	-	125	231	V
2	* 11.052	33.56	PK-U	37.9	-20.8	50.66	-	-	74	-23.34	-	-	144	253	H
	* 11.055	19.94	ADR	37.9	-20.7	37.14	54	-16.86	-	-	-	-	144	253	H
3	* 14.486	33.26	PK-U	39.9	-19.1	54.06	-	-	74	-19.94	-	-	181	286	H
	* 14.488	18.87	ADR	39.9	-19.1	39.67	54	-14.33	-	-	-	-	181	286	H
5	* 7.435	37.01	PK-U	36.1	-26.4	46.71	-	-	74	-27.29	-	-	206	322	V
	* 7.434	24.77	ADR	36.1	-26.4	34.47	54	-19.53	-	-	-	-	206	322	V
6	10.213	34.35	PK-U	37.8	-21.6	50.55	-	-	-	-	68.2	-17.65	190	349	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

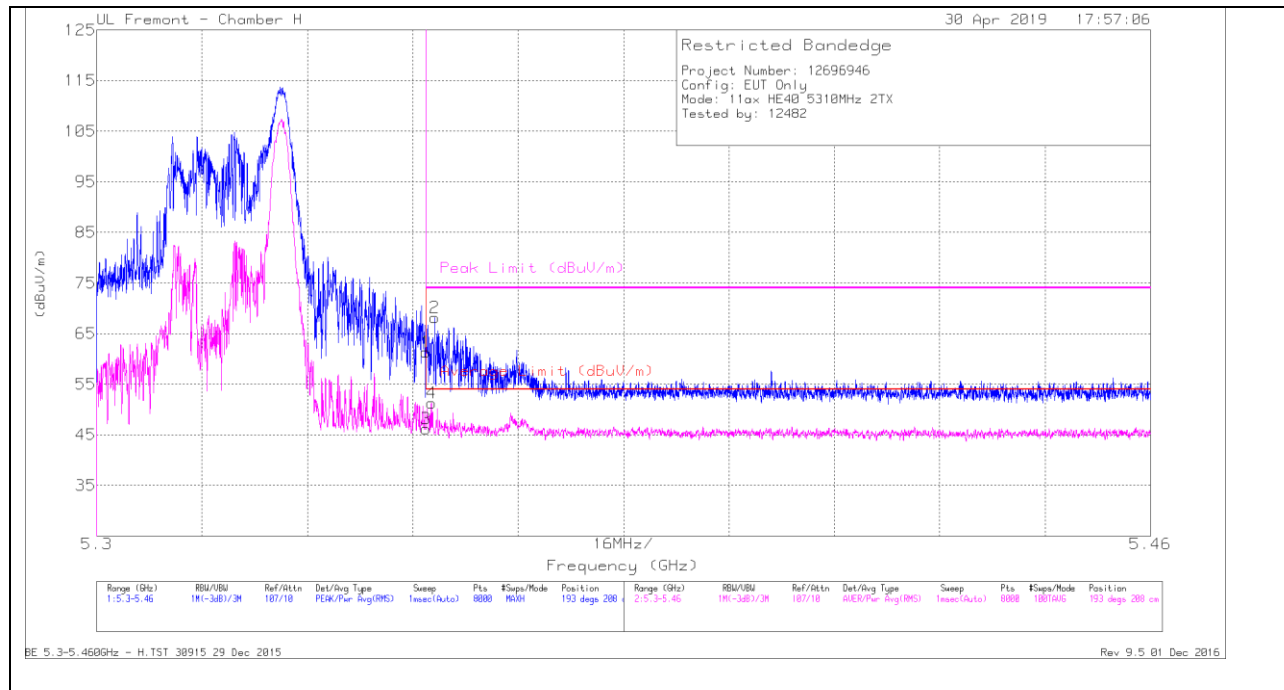BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	47.36	Pk	34.5	-20.5	61.36	-	-	74	-12.64	193	208	H
2	* 5.351	54.07	Pk	34.6	-20.5	68.17	-	-	74	-5.83	193	208	H
3	* 5.35	32.2	RMS	34.5	-20.5	46.2	54	-7.8	-	-	193	208	H
4	* 5.351	37.14	RMS	34.6	-20.5	51.24	54	-2.76	-	-	193	208	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


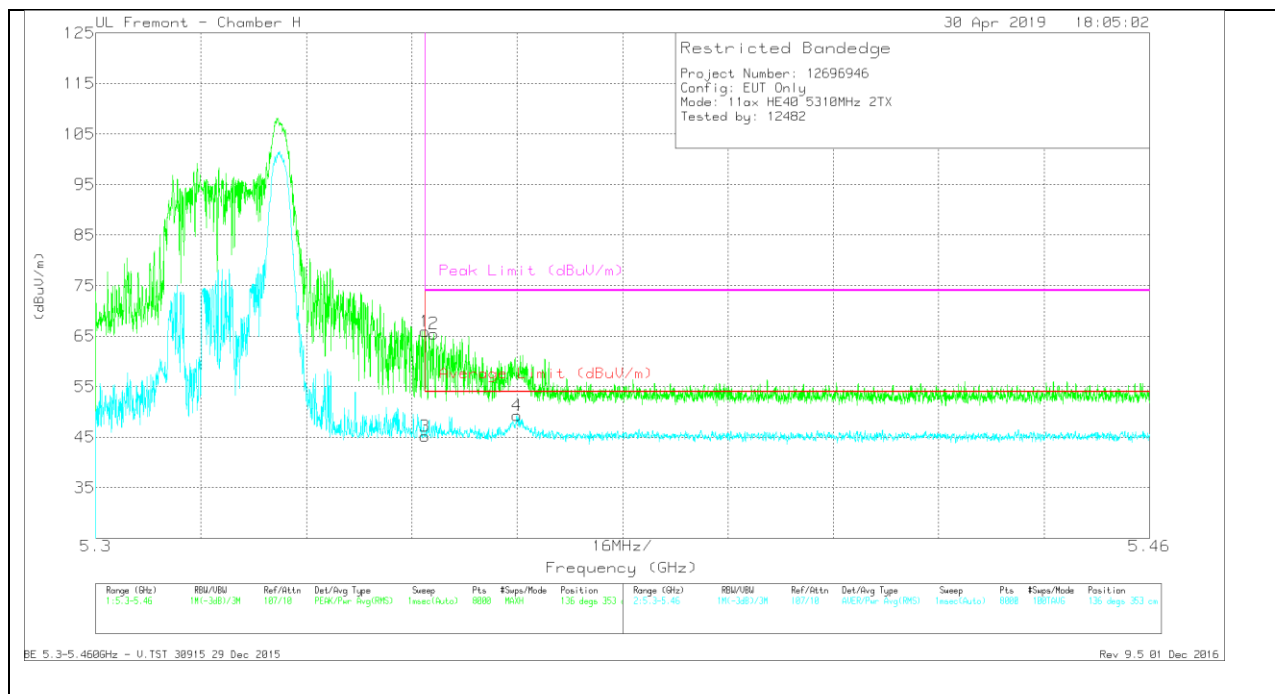


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	* 5.35	51.88	Pk	34.5	-20.5	65.88	-	-	74	-8.12	136	353	V
2	* 5.351	51.4	Pk	34.6	-20.5	65.5	-	-	74	-8.5	136	353	V
3	* 5.35	31.19	RMS	34.5	-20.5	45.19	54	-8.81	-	-	136	353	V
4	* 5.364	35.17	RMS	34.6	-20.5	49.27	54	-4.73	-	-	136	353	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

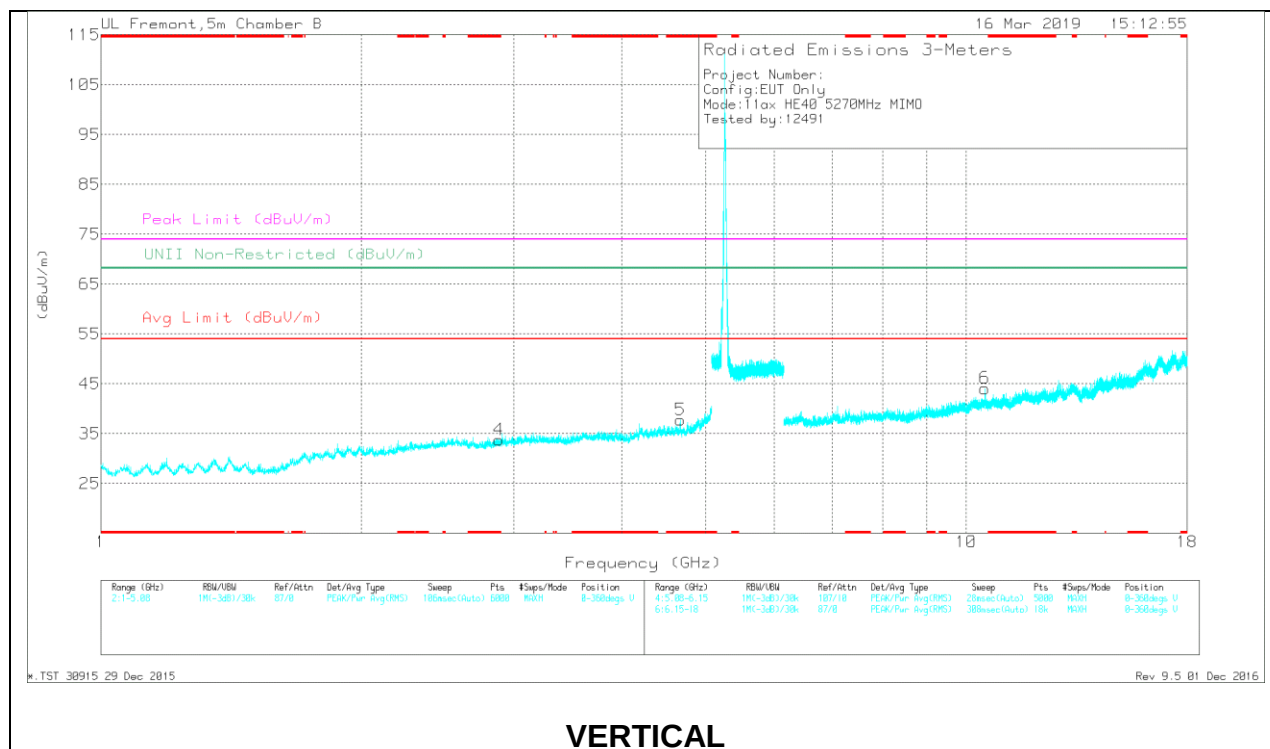
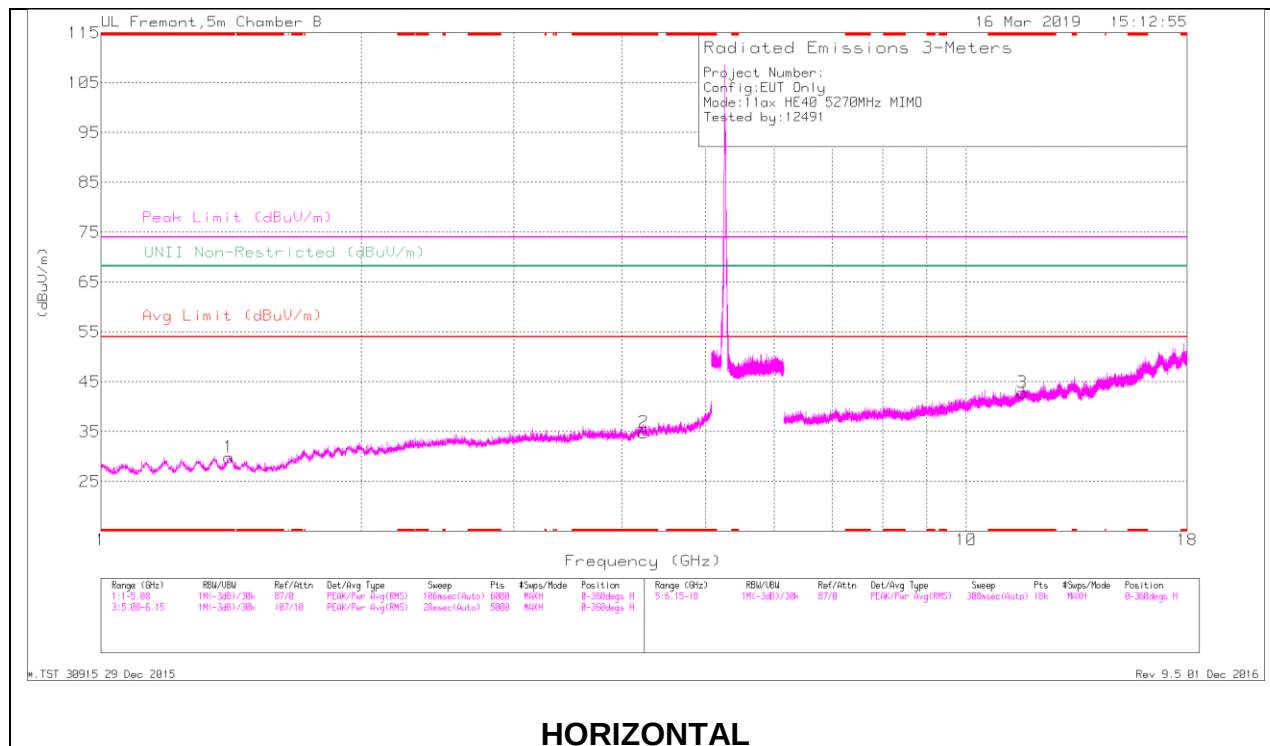
HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.404	41.46	PK-U	28.5	-32.2	37.76	-	-	74	-36.24	-	-	57	161	H
	* 1.407	29.64	ADR	28.5	-32.2	25.94	54	-28.06	-	-	-	-	57	161	H
2	* 4.236	37.84	PK-U	33.6	-28.2	43.24	-	-	74	-30.76	-	-	215	185	H
	* 4.234	25.57	ADR	33.6	-28.1	31.07	54	-22.93	-	-	-	-	215	185	H
4	* 2.879	39.16	PK-U	32.6	-30.3	41.46	-	-	74	-32.54	-	-	203	133	V
	* 2.88	27.14	ADR	32.6	-30.3	29.44	54	-24.56	-	-	-	-	203	133	V
5	* 4.674	38.4	PK-U	34.1	-28.3	44.2	-	-	74	-29.8	-	-	132	198	V
	* 4.674	26.63	ADR	34.1	-28.3	32.43	54	-21.57	-	-	-	-	132	198	V
3	* 11.604	32.59	PK-U	38.6	-20.8	50.39	-	-	74	-23.61	-	-	47	278	H
	* 11.606	19.82	ADR	38.7	-20.7	37.82	54	-16.18	-	-	-	-	47	278	H
6	10.502	33.57	PK-U	37.8	-21.2	50.17	-	-	-	-	68.2	-18.03	133	173	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

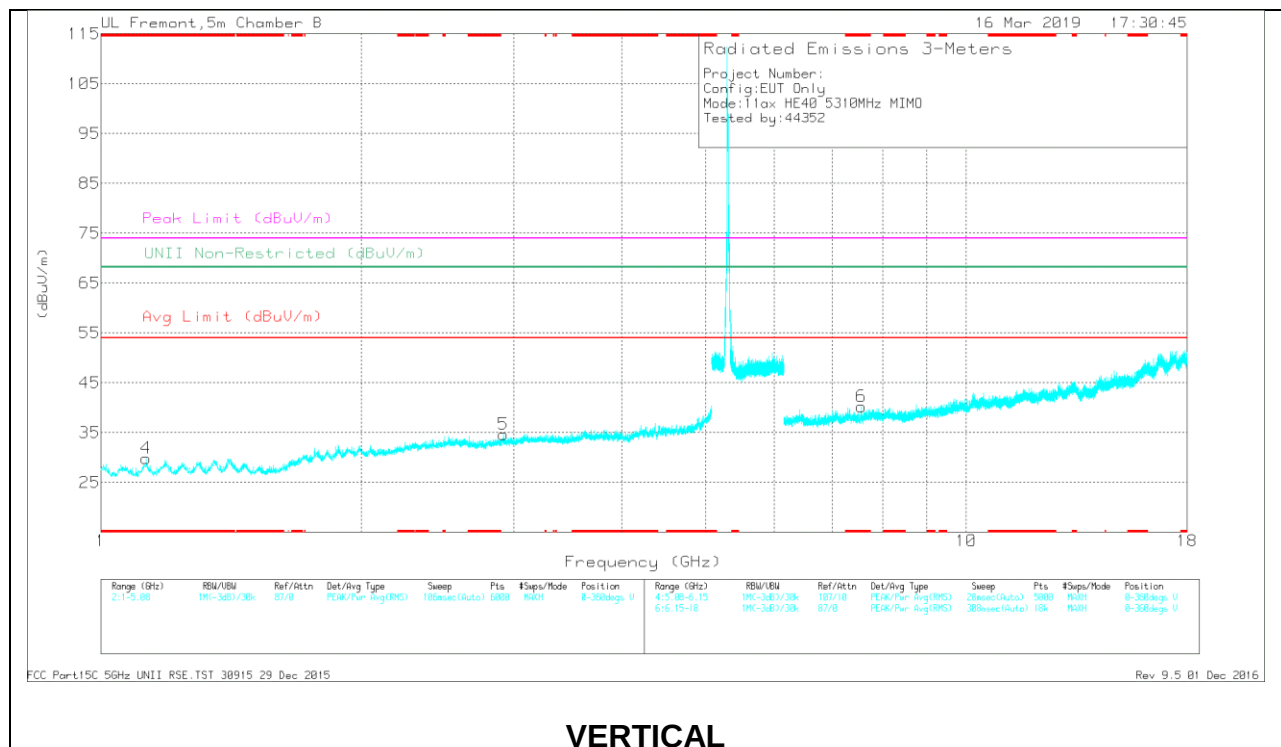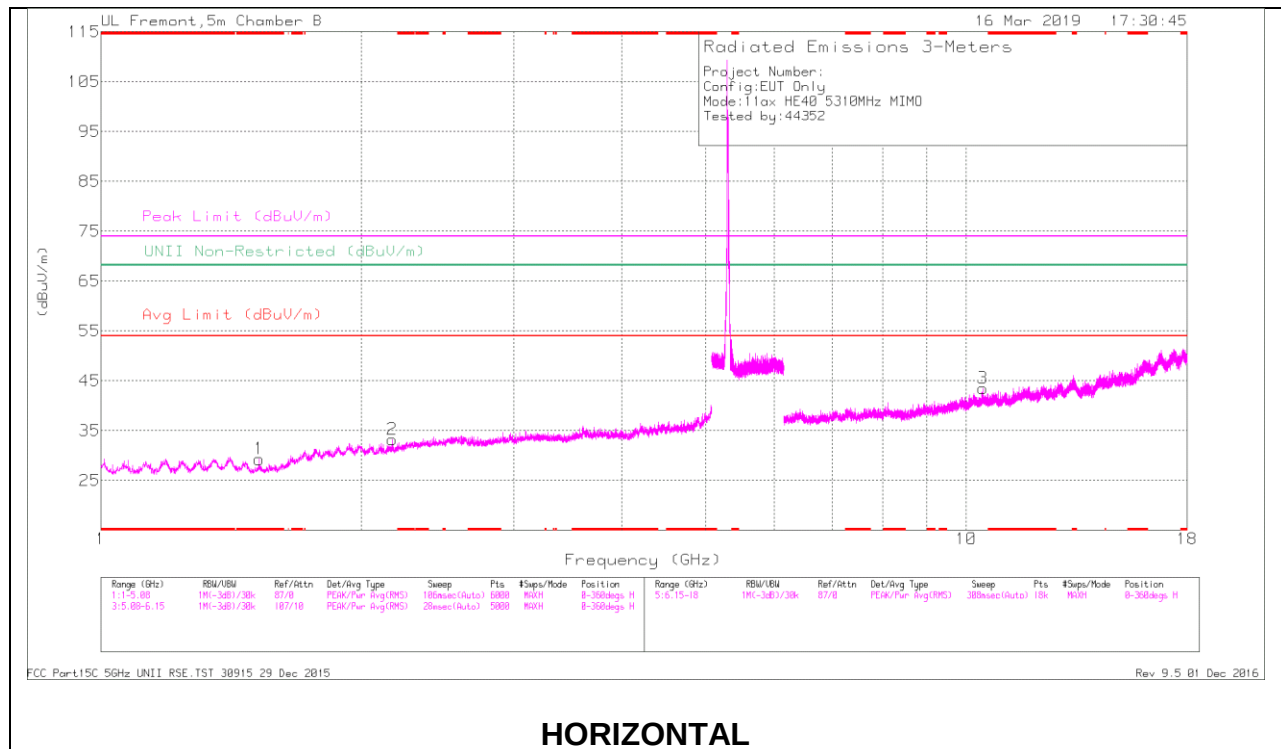


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CDI/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.525	40.86	PK-U	27.7	-33.1	35.46	-	-	74	-38.54	-	-	230	198	H
	* 1.525	28.67	ADR	27.7	-33.1	23.27	54	-30.73	-	-	-	-	230	198	H
4	* 1.127	41.98	PK-U	27.5	-33.1	36.38	-	-	74	-37.62	-	-	75	102	V
	* 1.129	29.91	ADR	27.5	-33.1	24.31	54	-29.69	-	-	-	-	75	102	V
6	* 7.559	35.64	PK-U	36.3	-25.2	46.74	-	-	74	-27.26	-	-	25	141	V
	* 7.557	22.59	ADR	36.3	-25.3	33.59	54	-20.41	-	-	-	-	25	141	V
2	2.171	40.29	PK-U	31.4	-32	39.69	-	-	-	-	68.2	-28.51	309	240	H
5	2.918	39.98	PK-U	32.7	-30.5	42.18	-	-	-	-	68.2	-26.02	160	364	V
3	10.446	34.11	PK-U	37.8	-21.2	50.71	-	-	-	-	68.2	-17.49	289	280	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

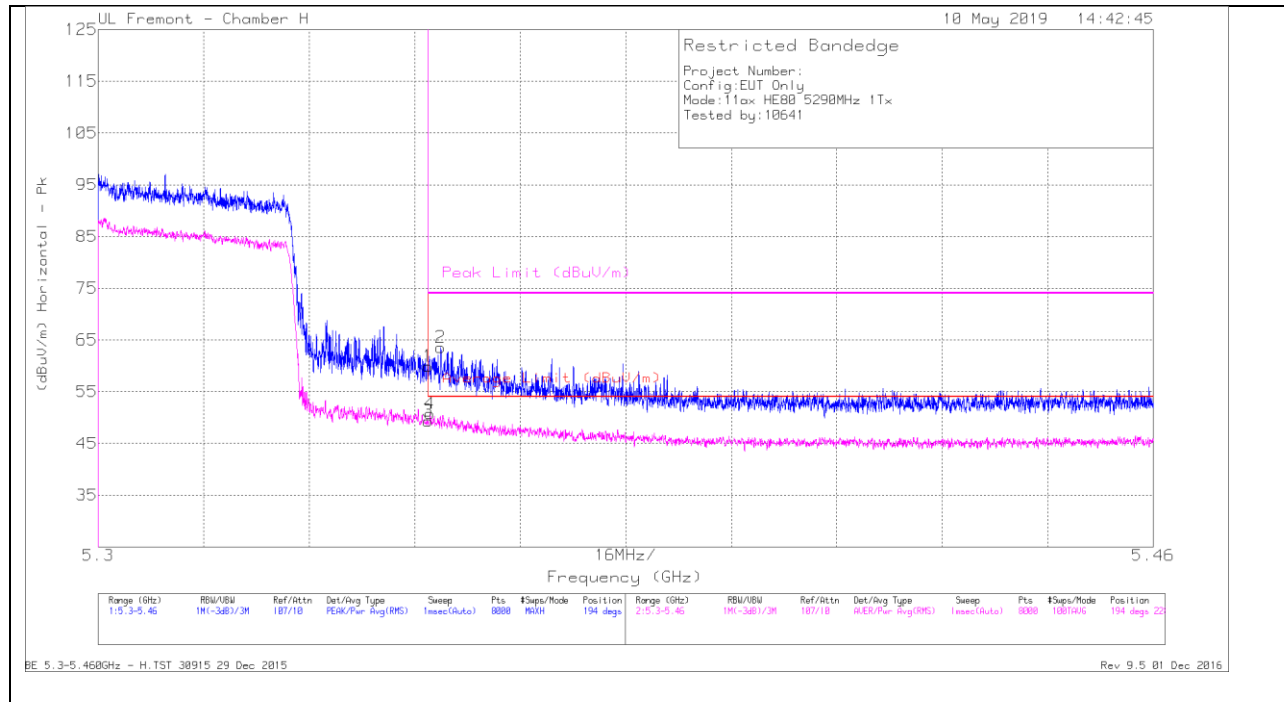1.1.12. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.3 GHz BAND**1TX Antenna 4 MODE – 996 Tones, RU Index 67****BANDEDGE (MID CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.91	Pk	34.5	-20.5	59.91	-	-	74	-14.09	194	228	H
2	* 5.352	49.45	Pk	34.6	-20.5	63.55	-	-	74	-10.45	194	228	H
3	* 5.35	35.35	RMS	34.5	-20.5	49.35	54	-4.65	-	-	194	228	H
4	* 5.35	36.64	RMS	34.6	-20.5	50.74	54	-3.26	-	-	194	228	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

BE 5.3-5.460GHz - H.TST 30915 29 Dec 2015

Rev 9.5 01 Dec 2016

VERTICAL RESULT

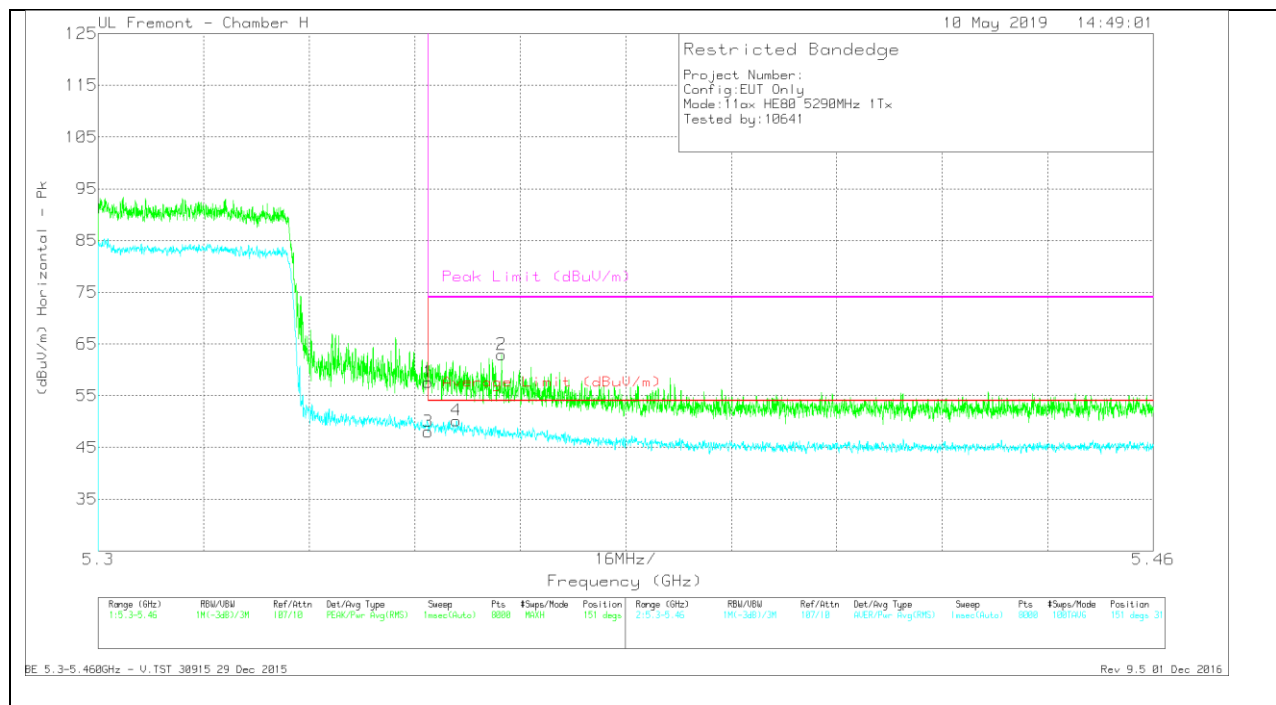

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.64	Pk	34.5	-20.5	57.64	-	-	74	-16.36	151	311	V
2	* 5.361	48.96	Pk	34.5	-20.5	62.96	-	-	74	-11.04	151	311	V
3	* 5.35	34.03	RMS	34.5	-20.5	48.03	54	-5.97	-	-	151	311	V
4	* 5.354	36.11	RMS	34.6	-20.5	50.21	54	-3.79	-	-	151	311	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BE 5.3-5.460GHz - V.TST 30915 29 Dec 2015

Rev 9.5 01 Dec 2016

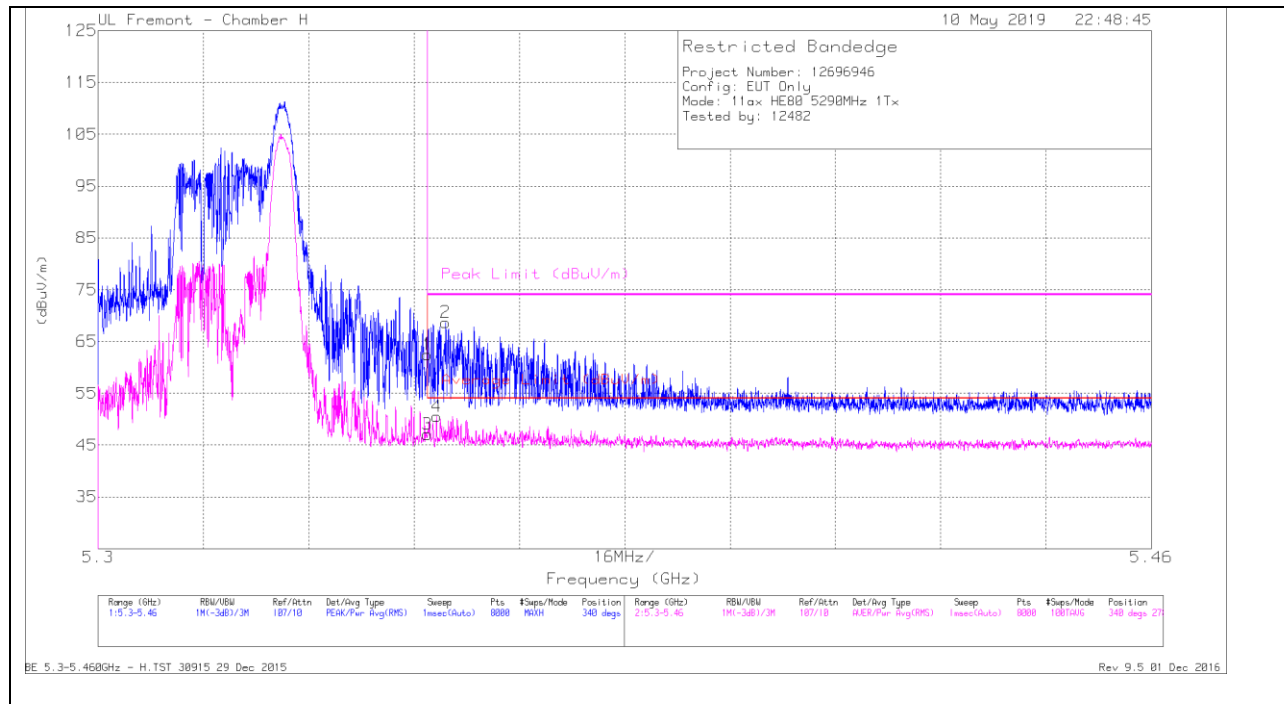1TX Antenna 4 MODE – 26 Tones, RU Index 36**BANDEDGE (MID CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	48.45	Pk	34.5	-20.5	62.45	-	-	74	-11.55	340	278	H
2	* 5.353	54.58	Pk	34.6	-20.5	68.68	-	-	74	-5.32	340	278	H
3	* 5.35	33.07	RMS	34.5	-20.5	47.07	54	-6.93	-	-	340	278	H
4	* 5.351	36.4	RMS	34.6	-20.5	50.5	54	-3.5	-	-	340	278	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

BE 5.3-5.460GHz - H.TST 30915 29 Dec 2015

Rev 9.5 01 Dec 2016

VERTICAL RESULT

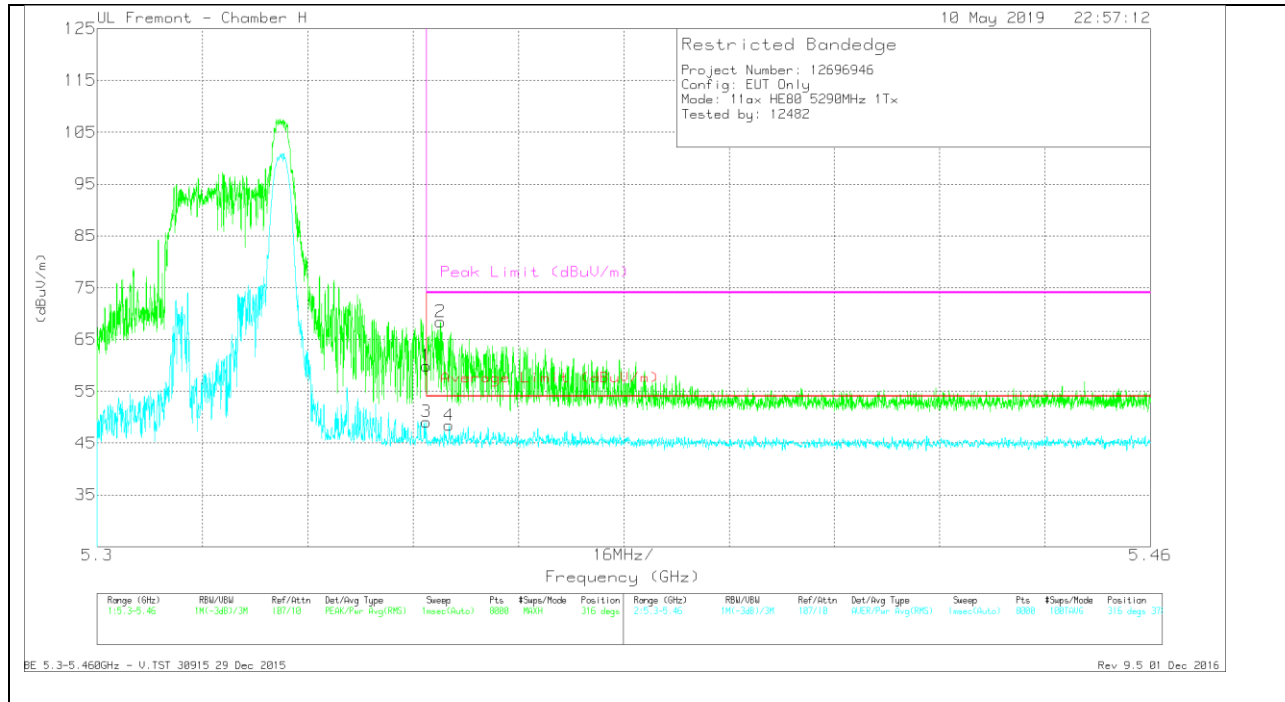

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.94	Pk	34.5	-20.5	59.94	-	-	74	-14.06	316	378	V
2	* 5.352	54.33	Pk	34.6	-20.5	68.43	-	-	74	-5.57	316	378	V
3	* 5.35	35.11	RMS	34.5	-20.5	49.11	54	-4.89	-	-	316	378	V
4	* 5.353	34.32	RMS	34.6	-20.5	48.42	54	-5.58	-	-	316	378	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BE 5.3-5.460GHz - V.TST 30915 29 Dec 2015

Rev 9.5 01 Dec 2016

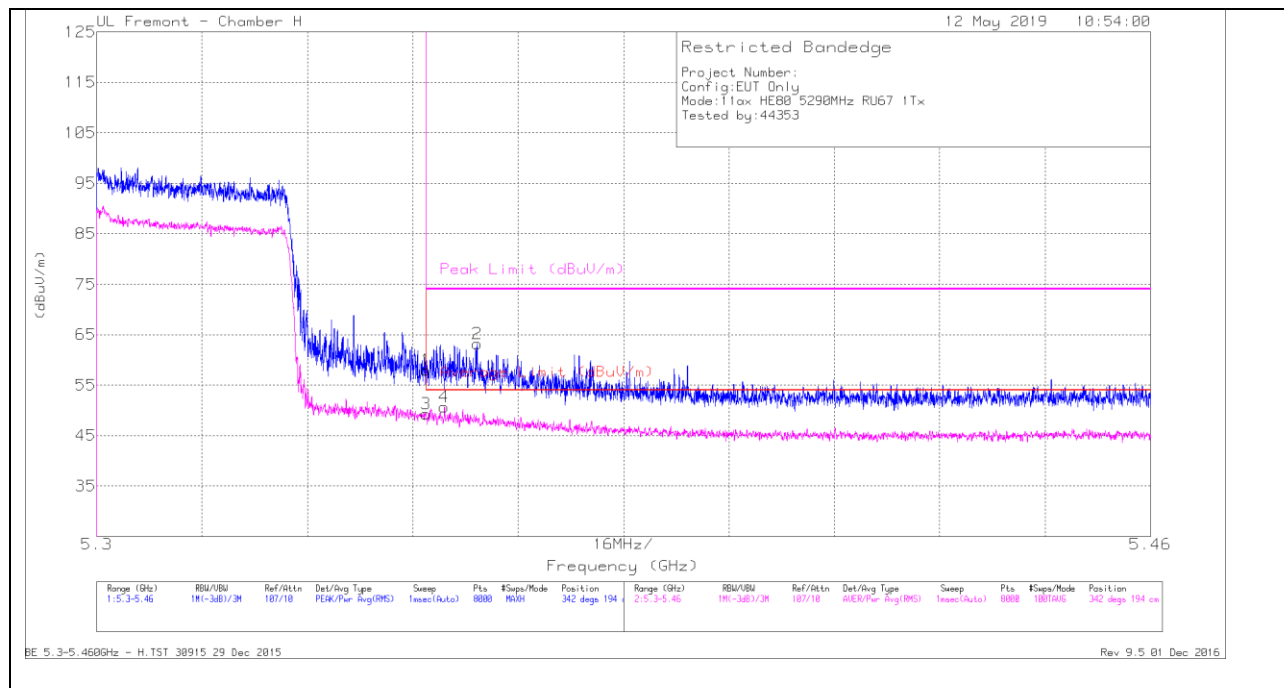1TX Antenna 5 MODE – 996 Tones, RU Index 67**BANDEDGE (MID CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.01	Pk	34.5	-20.5	58.01	-	-	74	-15.99	342	194	H
2	* 5.358	49.15	Pk	34.5	-20.5	63.15	-	-	74	-10.85	342	194	H
3	* 5.35	35.34	RMS	34.5	-20.5	49.34	54	-4.66	-	-	342	194	H
4	* 5.353	36.59	RMS	34.6	-20.5	50.69	54	-3.31	-	-	342	194	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BE 5.3-5.460GHz - H.TST 30915 29 Dec 2015

Rev 9.5 01 Dec 2016