
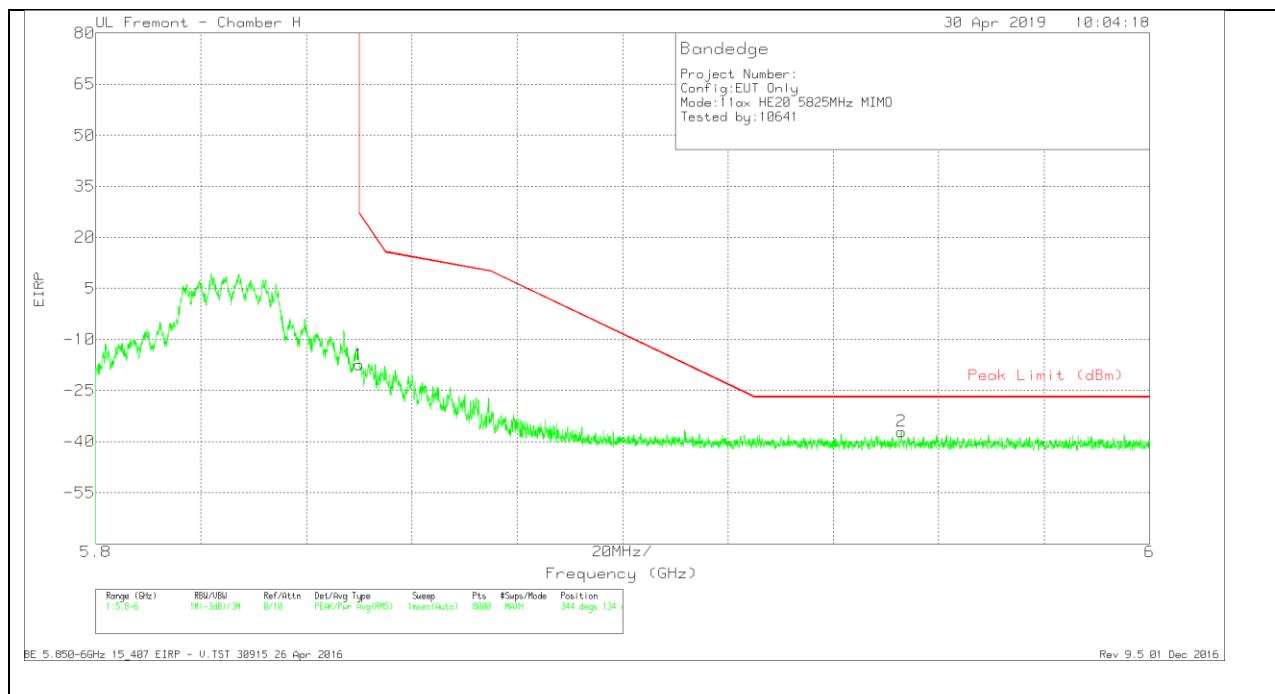
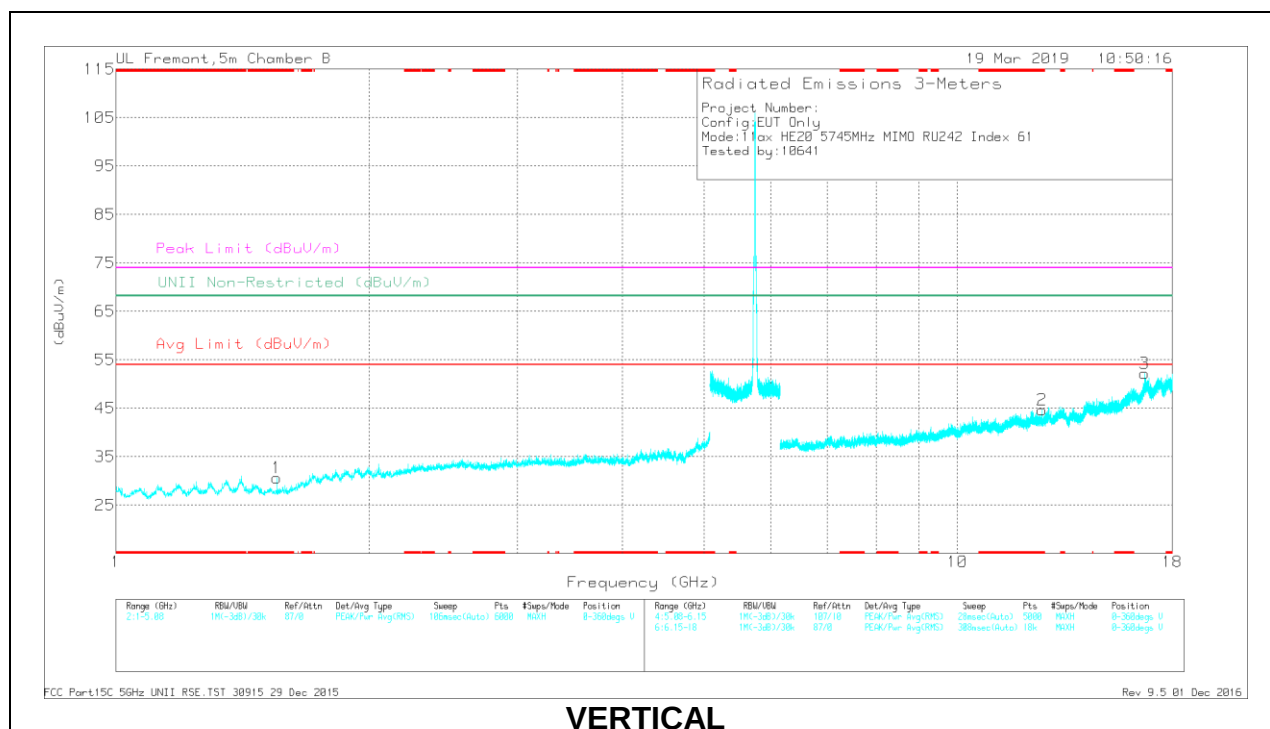


VERTICAL RESULT

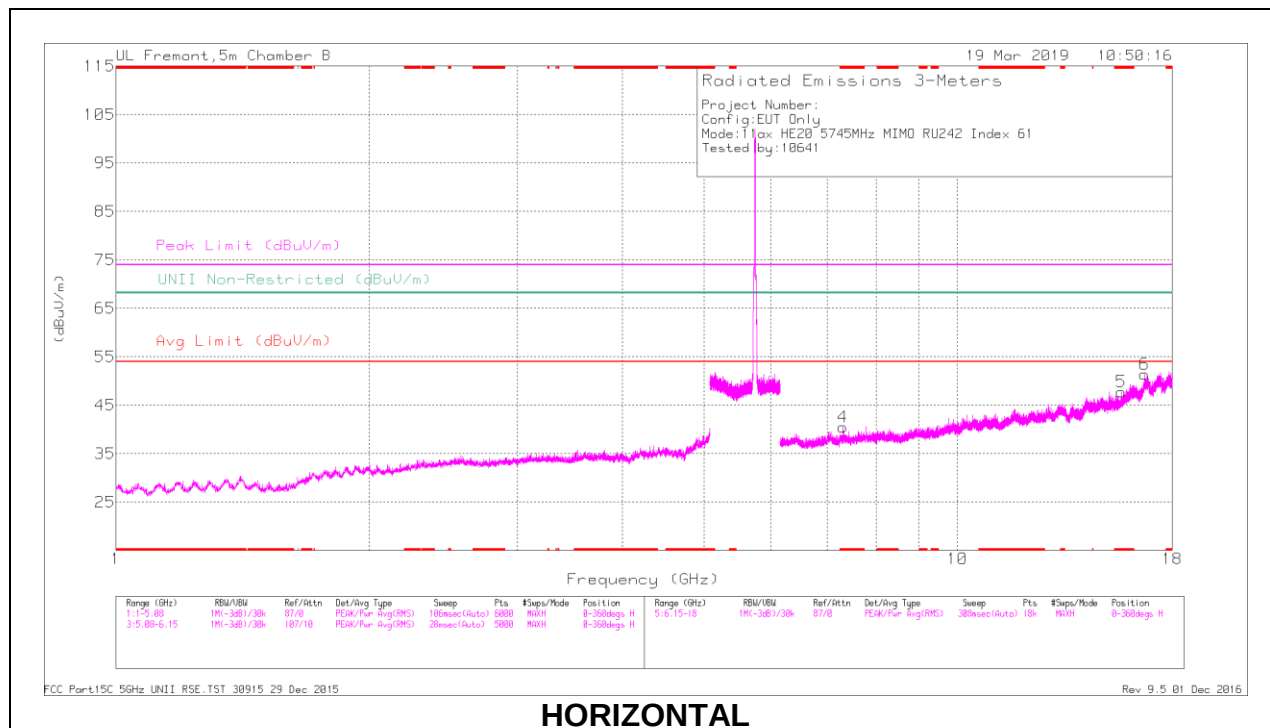

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbll/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.33	Pk	35.5	-20.4	11.8	-17.43	26.99	-44.42	344	134	V
2	5.953	-64.22	Pk	35.6	-20.2	11.8	-37.02	-27	-10.02	344	134	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.552	41.82	PK-U	27.7	-33.1	36.42	-	-	74	-37.58	-	-	125	251	V
	* 1.553	29.59	ADR	27.7	-33.1	24.19	54	-29.81	-	-	-	-	125	251	V
5	* 15.656	32.61	PK-U	41.1	-18.7	55.01	-	-	74	-18.99	-	-	125	197	H
	* 15.659	18.32	ADR	41.1	-18.6	40.82	54	-13.18	-	-	-	-	125	197	H
4	* 7.31	35.61	PK-U	35.9	-24.5	47.01	-	-	74	-26.99	-	-	135	226	H
	* 7.31	23.03	ADR	35.9	-24.6	34.33	54	-19.67	-	-	-	-	135	226	H
2	* 12.602	32.47	PK-U	39.2	-20.3	51.37	-	-	74	-22.63	-	-	119	148	V
	* 12.604	19.35	ADR	39.2	-20.3	38.25	54	-15.75	-	-	-	-	119	148	V
6	16.677	32.19	PK-U	44.1	-17.5	58.79	-	-	-	-	68.2	-9.41	96	165	H
3	16.692	32.01	PK-U	44.3	-17.5	58.81	-	-	-	-	68.2	-9.39	57	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

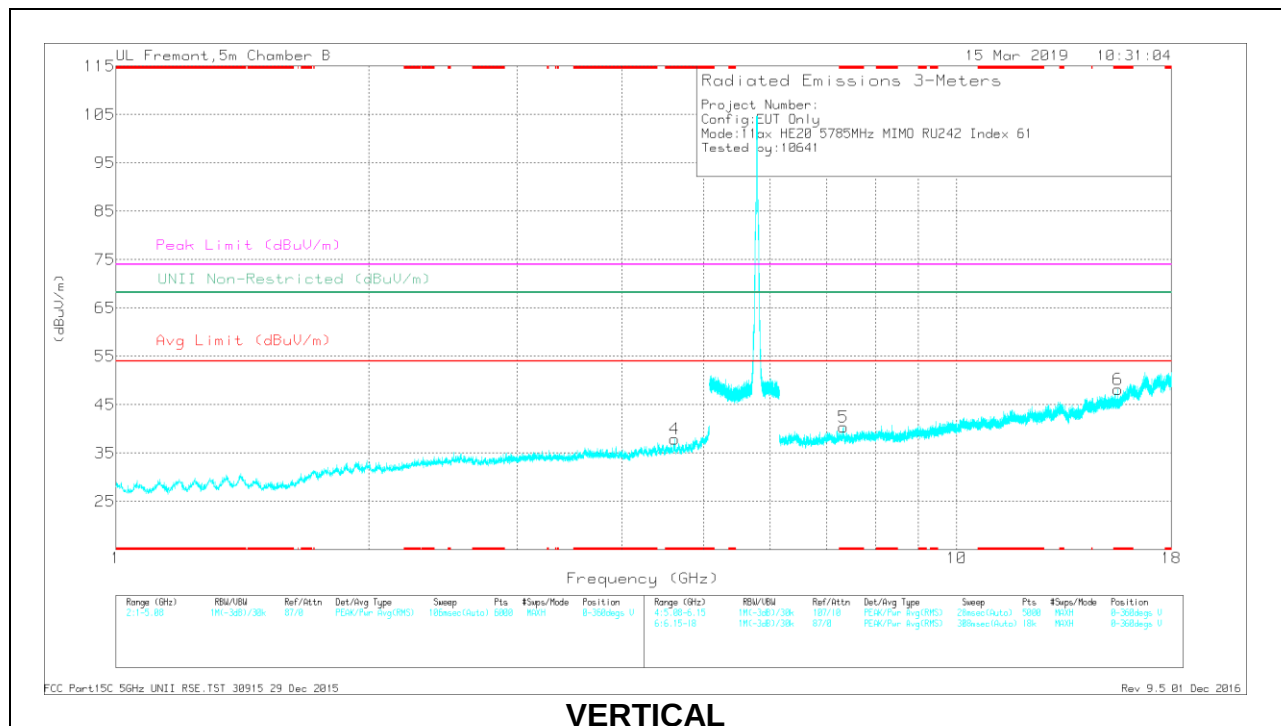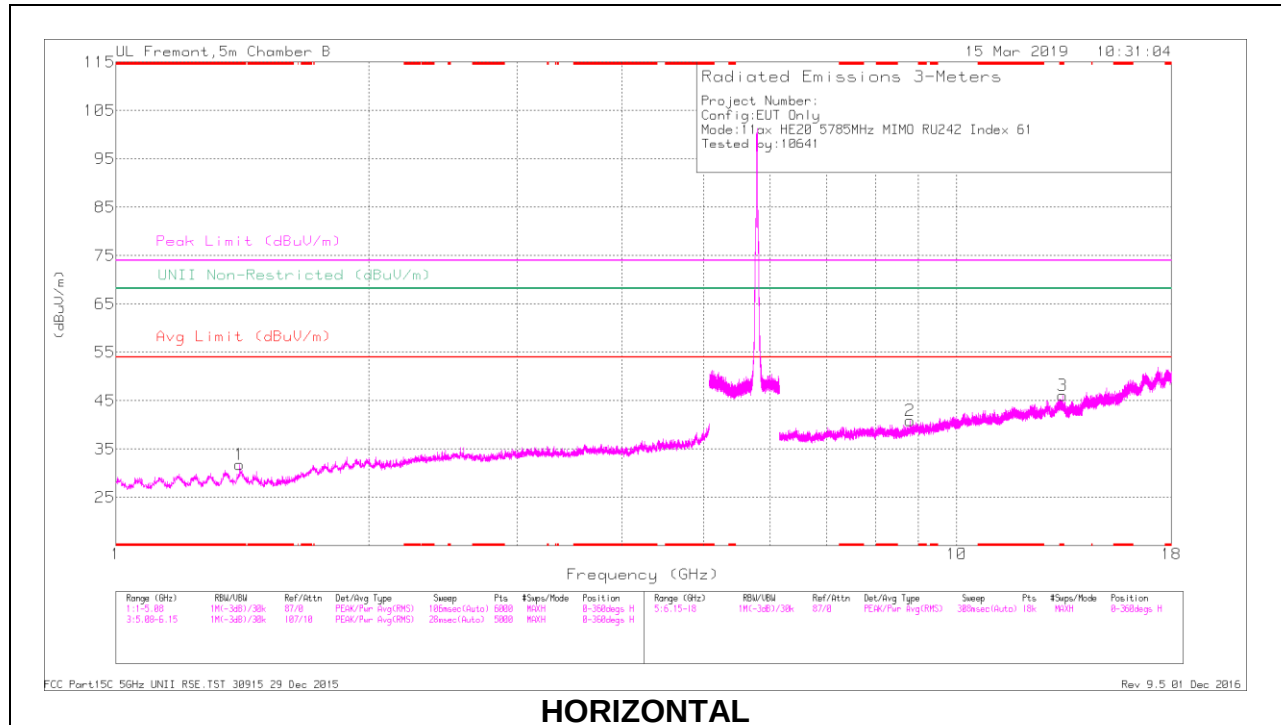

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.403	41.82	PK-U	28.5	-32.2	38.12	-	-	74	-35.88	-	-	47	127	H
	* 1.405	29.95	ADR	28.5	-32.2	26.25	54	-27.75	-	-	-	-	47	127	H
4	* 4.615	38.67	PK-U	34.1	-28.3	44.47	-	-	74	-29.53	-	-	60	221	V
	* 4.614	26.69	ADR	34.1	-28.4	32.39	54	-21.61	-	-	-	-	60	221	V
3	* 13.364	32.63	PK-U	40.4	-20.9	52.13	-	-	74	-21.87	-	-	143	305	H
	* 13.364	19.83	ADR	40.4	-20.9	39.33	54	-14.67	-	-	-	-	143	305	H
5	* 7.335	35.12	PK-U	36	-24.3	46.82	-	-	74	-27.18	-	-	186	277	V
	* 7.335	23.01	ADR	36	-24.3	34.71	54	-19.29	-	-	-	-	186	277	V
6	* 15.558	32.71	PK-U	40.6	-18.9	54.41	-	-	74	-19.59	-	-	224	310	V
	* 15.556	19.13	ADR	40.6	-19	40.73	54	-13.27	-	-	-	-	224	310	V
2	8.806	35.24	PK-U	36.6	-23.8	48.04	-	-	-	-	68.2	-20.16	103	285	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

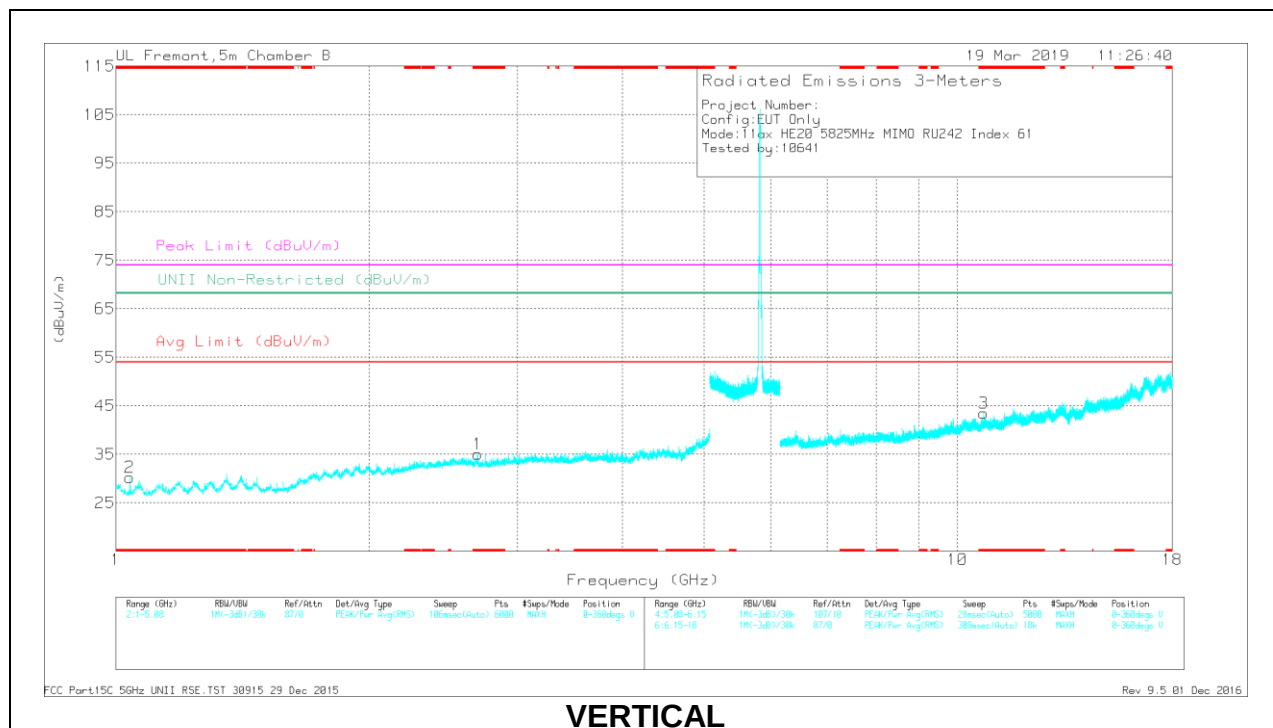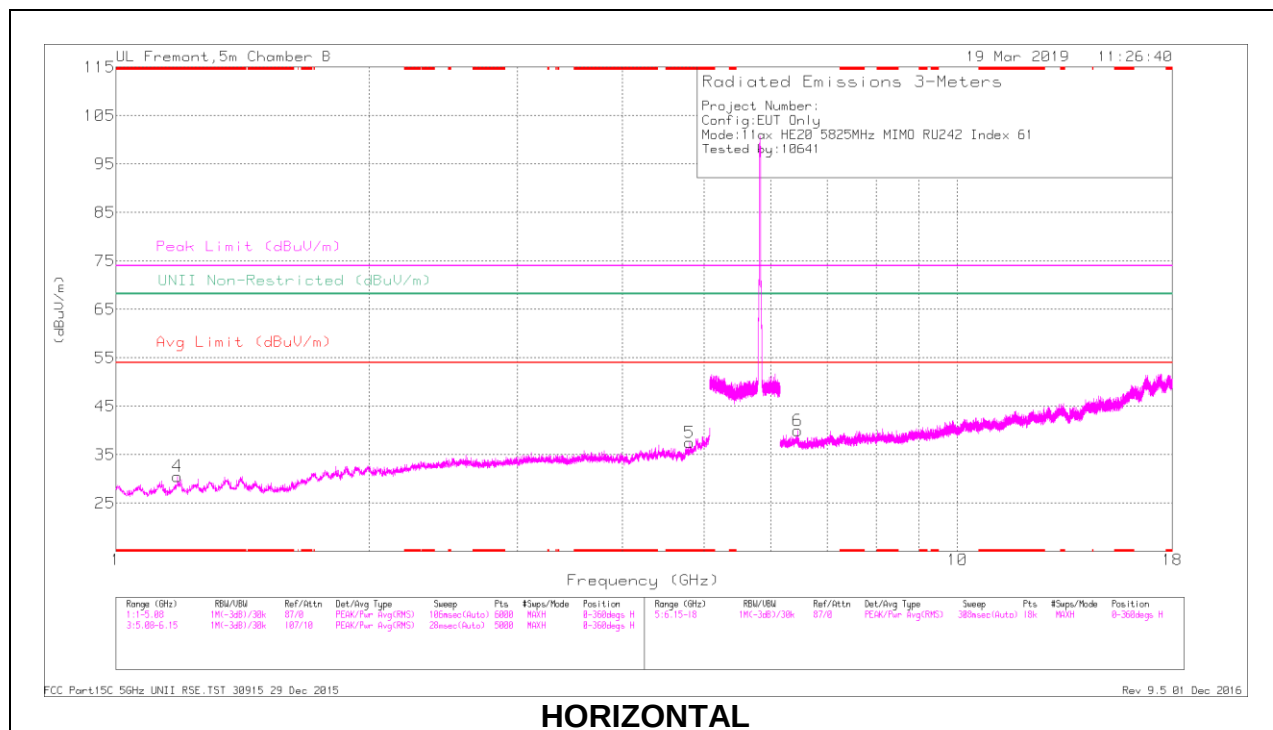


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/CbI/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 1.185	42.36	PK-U	28.1	-33.2	37.26	-	-	74	-36.74	-	-	33	114	H
	* 1.184	30.52	ADR	28.1	-33.2	25.42	54	-28.58	-	-	-	-	33	114	H
5	* 4.807	37.71	PK-U	34.1	-28.2	43.61	-	-	74	-30.39	-	-	63	125	H
	* 4.808	25.8	ADR	34.1	-28.2	31.7	54	-22.3	-	-	-	-	63	125	H
1	* 2.691	40.32	PK-U	32.3	-30.7	41.92	-	-	74	-32.08	-	-	75	168	V
	* 2.691	28.07	ADR	32.3	-30.7	29.67	54	-24.33	-	-	-	-	75	168	V
2	* 1.039	41.36	PK-U	27.5	-33.7	35.16	-	-	74	-38.84	-	-	94	138	V
	* 1.04	29.62	ADR	27.5	-33.7	23.42	54	-30.58	-	-	-	-	94	138	V
3	* 10.744	33.66	PK-U	37.9	-21	50.56	-	-	74	-23.44	-	-	57	194	V
	* 10.746	20.22	ADR	37.9	-20.9	37.22	54	-16.78	-	-	-	-	57	194	V
6	6.452	36.44	PK-U	35.7	-25.4	46.74	-	-	-	-	68.2	-21.46	70	128	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

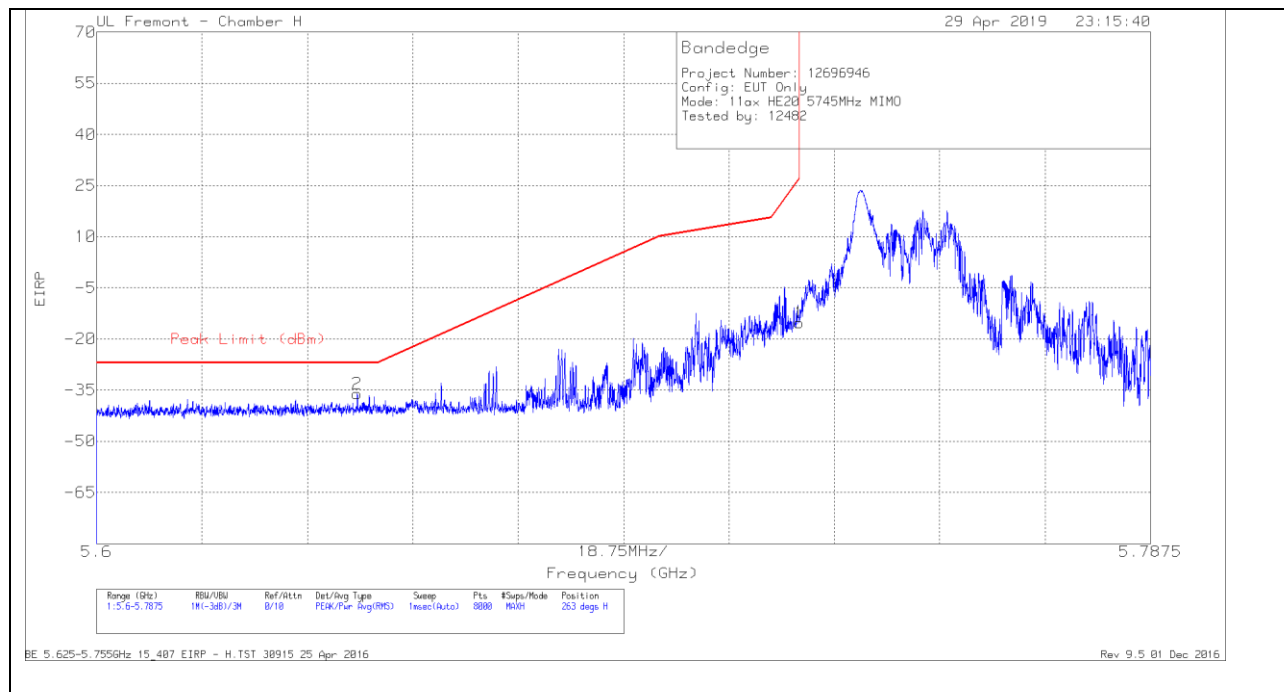BANDEDGE (LOW CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.646	-62.22	Pk	35	-20.6	11.8	-36.02	-27	-9.02	263	227	H
1	5.725	-41.48	Pk	35.1	-20.7	11.8	-15.28	26.96	-42.24	263	227	H


Pk - Peak detector

VERTICAL RESULT

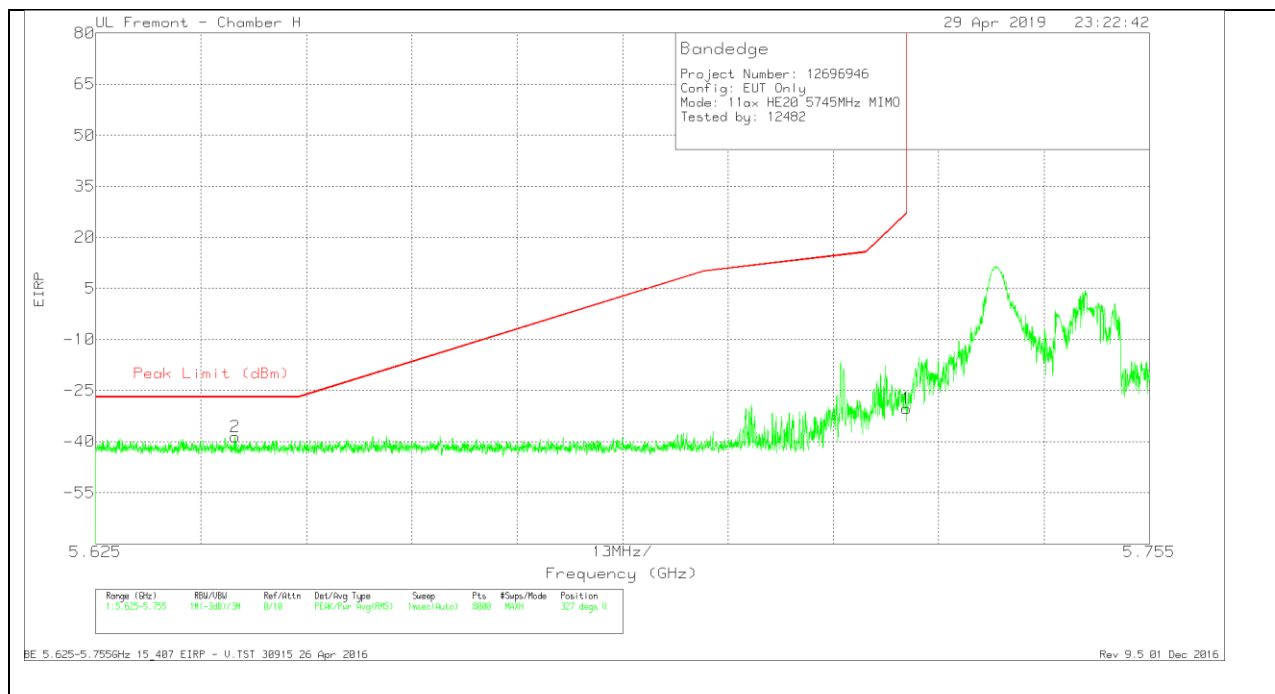

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.642	-64.77	Pk	35	-20.6	11.8	-38.57	-27	-11.57	327	184	V
1	5.725	-56.46	Pk	35.1	-20.7	11.8	-30.26	27	-57.26	327	184	V


Pk - Peak detector

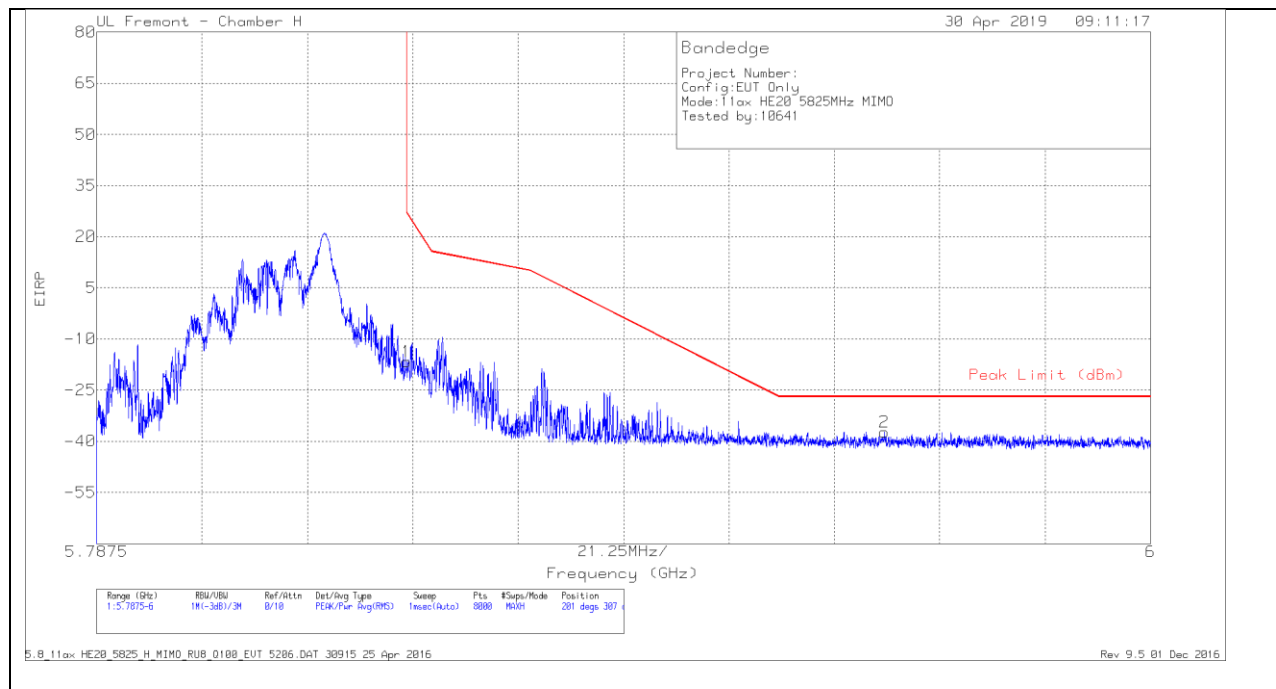BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-43.55	Pk	35.5	-20.4	11.8	-16.65	26.98	-43.63	201	307	H
2	5.946	-64.72	Pk	35.7	-20.1	11.8	-37.32	-27	-10.32	201	307	H



Pk - Peak detector

VERTICAL RESULT

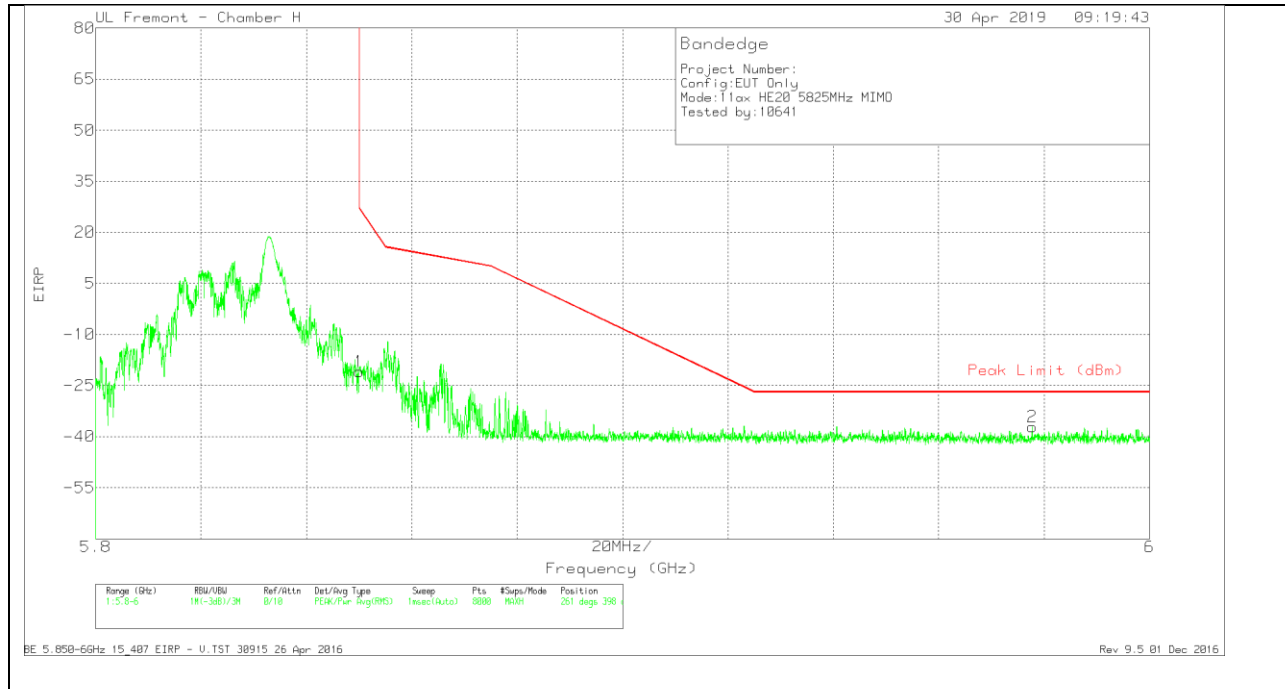

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-47.72	Pk	35.5	-20.4	11.8	-20.82	26.99	-47.81	261	398	V
2	5.978	-64.47	Pk	35.6	-20	11.8	-37.07	-27	-10.07	261	398	V

Pk - Peak detector

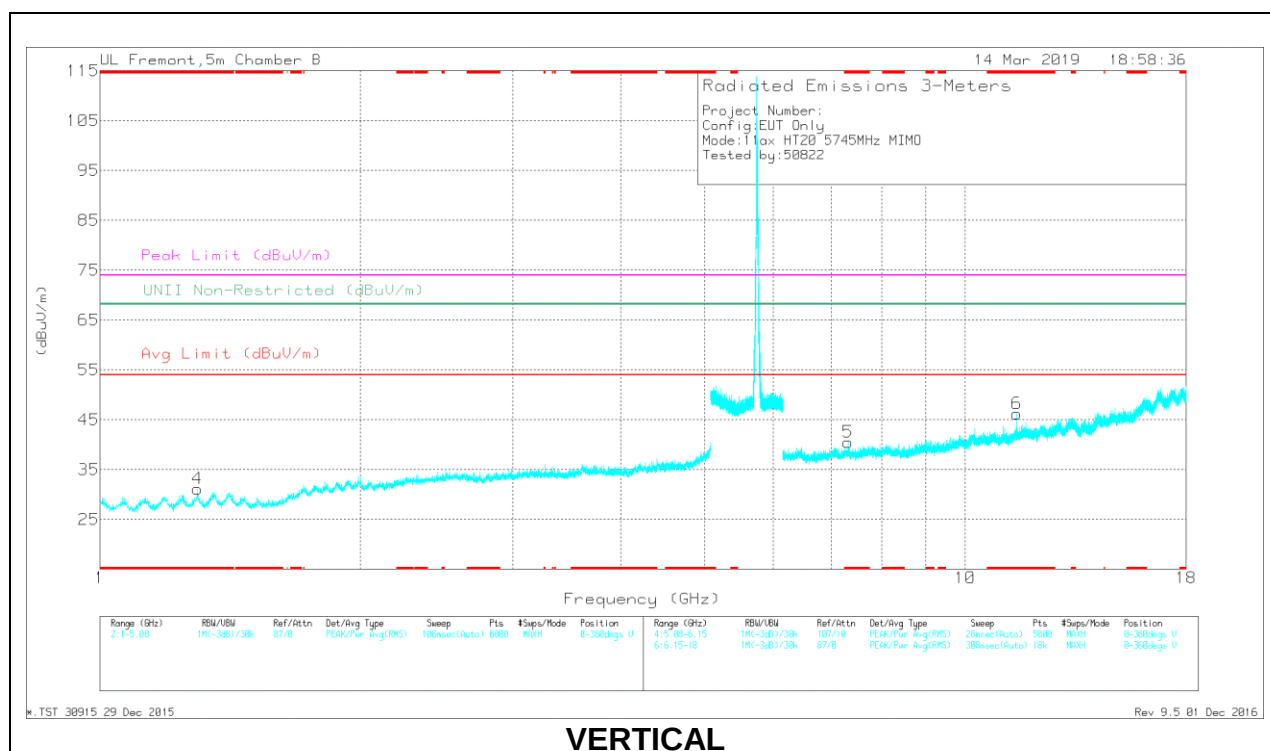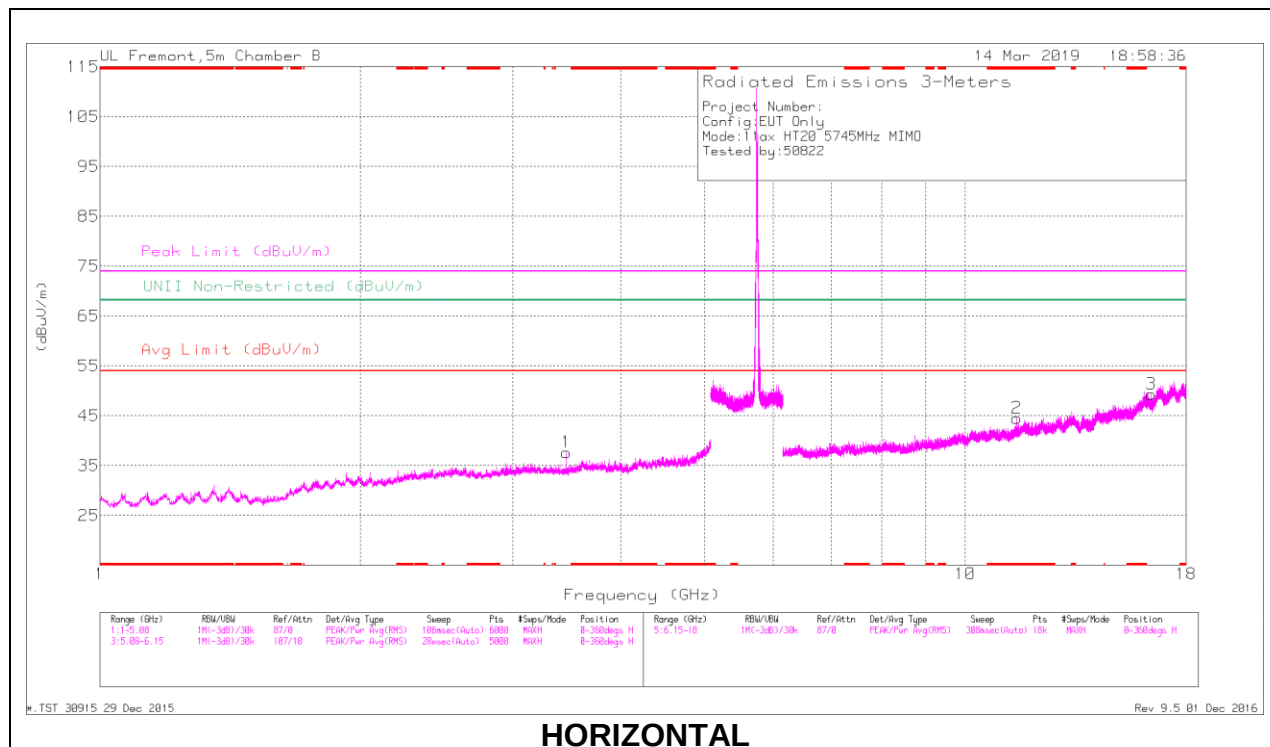2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 8**HARMONICS AND SPURIOUS EMISSIONS****LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/CbllFtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNIT Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 1.297	42.37	PK-U	28.4	-33.2	37.57	-	-	74	-36.43	-	-	238	289	V
	* 1.296	30.14	ADR	28.4	-33.3	25.24	54	-28.76	-	-	-	-	238	289	V
2	* 11.472	35.41	PK-U	38.4	-21	52.81	-	-	74	-21.19	-	-	38	121	H
	* 11.473	23.2	ADR	38.4	-21	40.6	54	-13.4	-	-	-	-	38	121	H
5	* 7.325	35.62	PK-U	36	-24.2	47.42	-	-	74	-26.58	-	-	327	277	V
	* 7.323	22.48	ADR	35.9	-24.2	34.18	54	-19.82	-	-	-	-	327	277	V
6	* 11.474	35.47	PK-U	38.4	-21	52.87	-	-	74	-21.13	-	-	139	127	V
	* 11.473	23.86	ADR	38.4	-21	41.26	54	-12.74	-	-	-	-	139	127	V
1	3.46	39.73	PK-U	32.9	-30.1	42.53	-	-	-	-	68.2	-25.67	239	281	H
3	16.389	32.08	PK-U	42.7	-18.8	55.98	-	-	-	-	68.2	-12.22	53	301	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

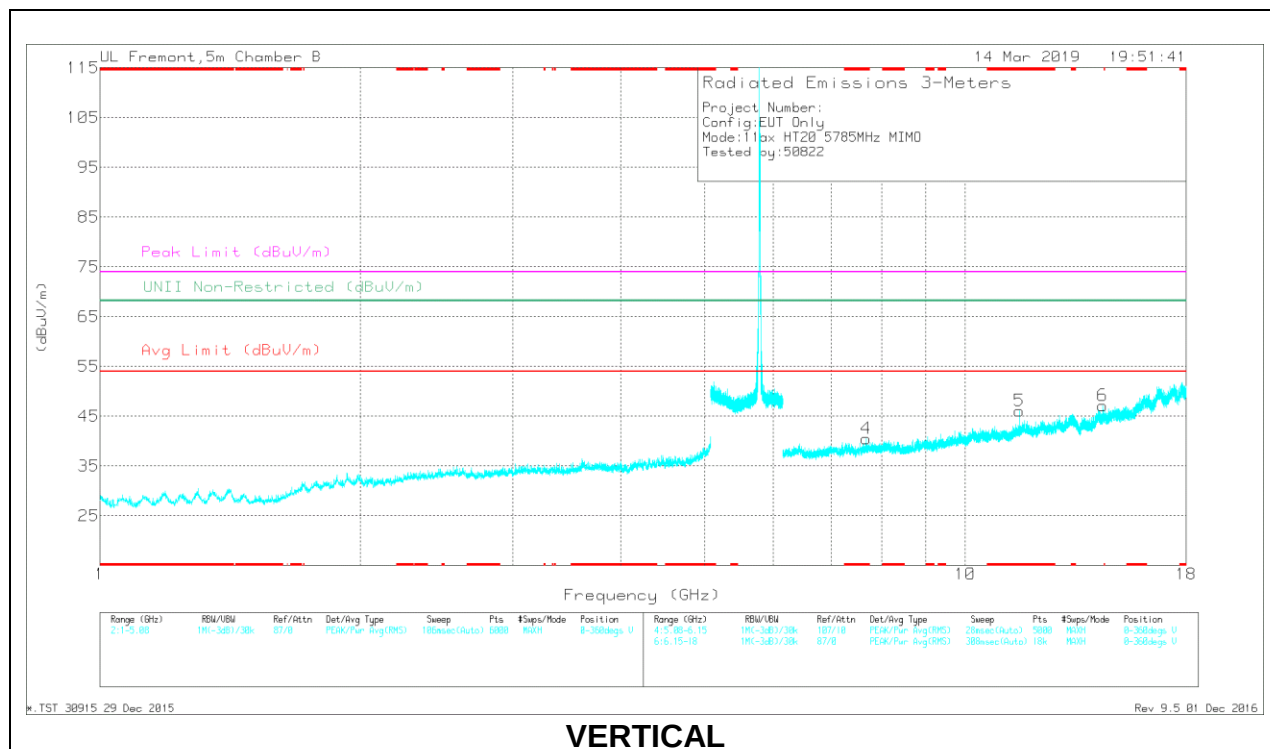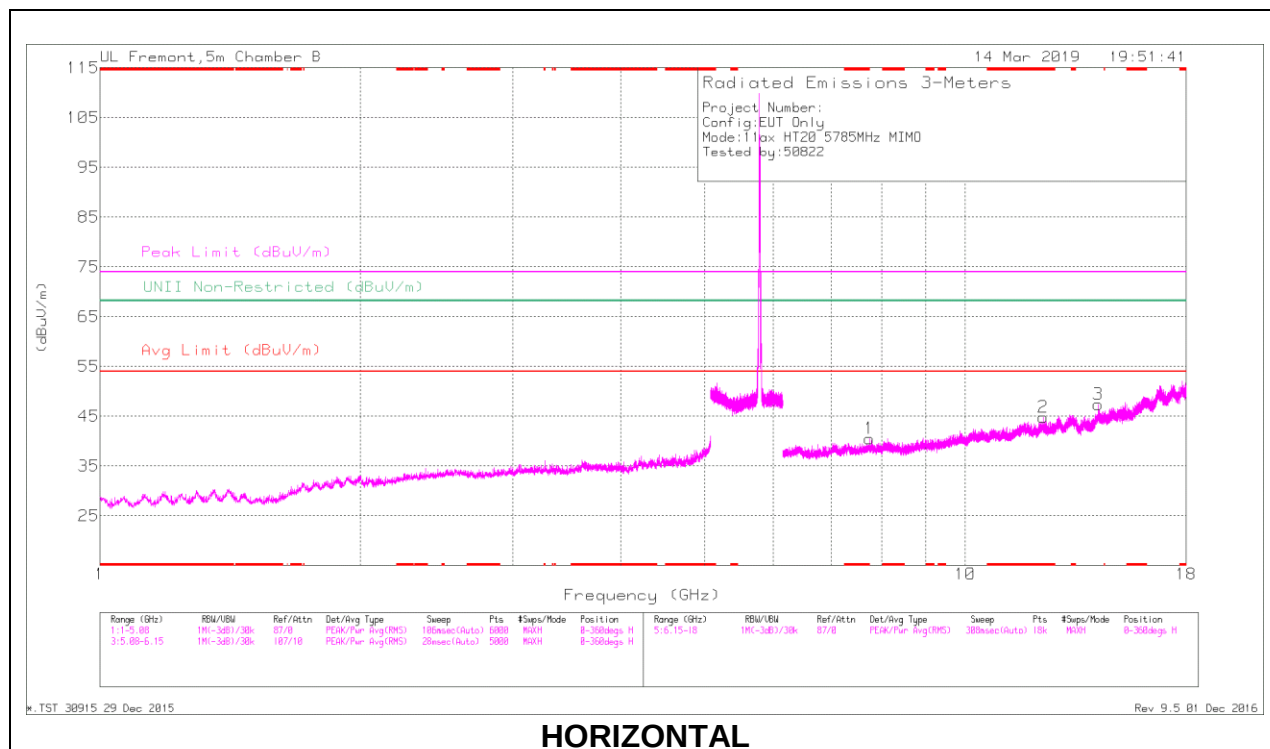

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.425	36.51	PK-U	36.2	-26.3	46.41	-	-	74	-27.59	-	-	199	274	H
	* 7.435	23.79	ADR	36.1	-26.4	33.49	54	-20.51	-	-	-	-	199	274	H
4	* 12.3	32.89	PK-U	39.1	-20	51.99	-	-	74	-22.01	-	-	39	263	H
	* 12.302	18.99	ADR	39.1	-20.1	37.99	54	-16.01	-	-	-	-	39	263	H
5	* 7.682	35.96	PK-U	36.4	-26	46.36	-	-	74	-27.64	-	-	159	300	V
	* 7.681	23.59	ADR	36.4	-26	33.99	54	-20.01	-	-	-	-	159	300	V
1	* 11.553	37.49	PK-U	38.5	-21.2	54.79	-	-	74	-19.21	-	-	273	121	V
	* 11.553	24.57	ADR	38.5	-21.2	41.87	54	-12.13	-	-	-	-	273	121	V
3	14.238	34.4	PK-U	40.2	-19.8	54.8	-	-	-	-	68.2	-13.4	36	259	H
6	14.424	33.29	PK-U	40.1	-19.6	53.79	-	-	-	-	68.2	-14.41	233	286	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

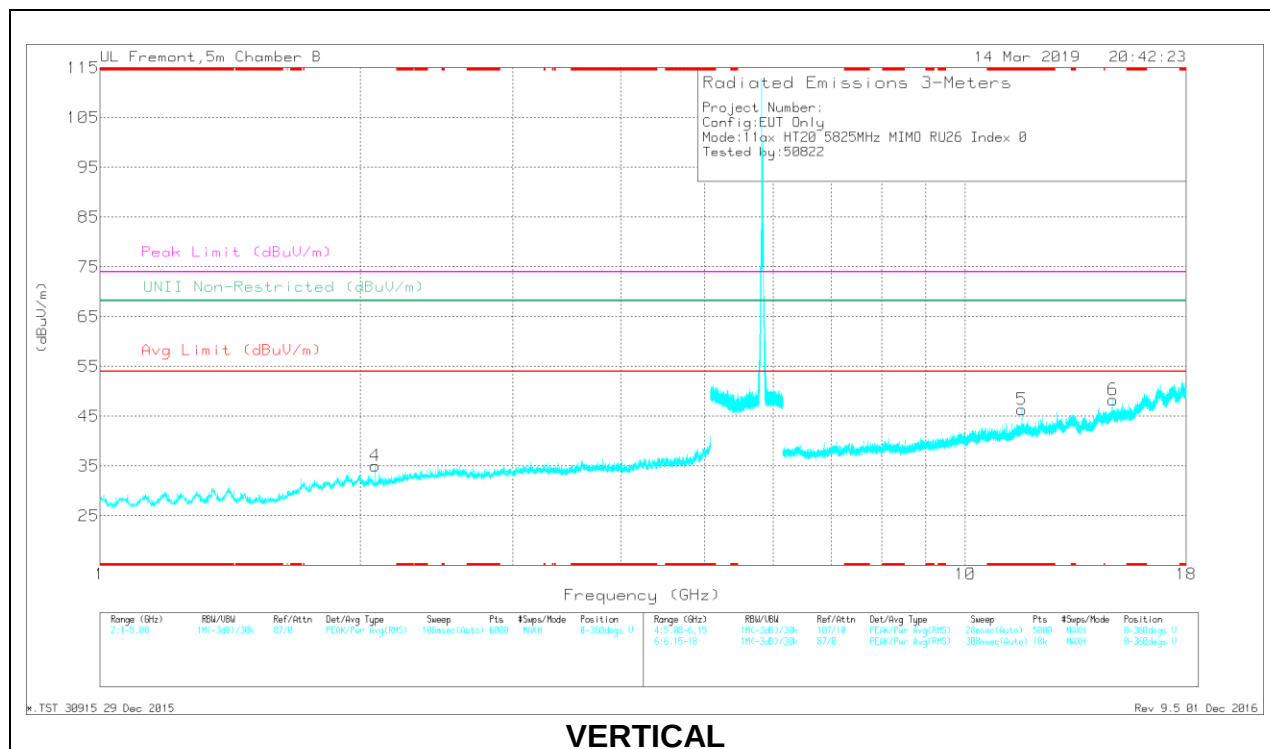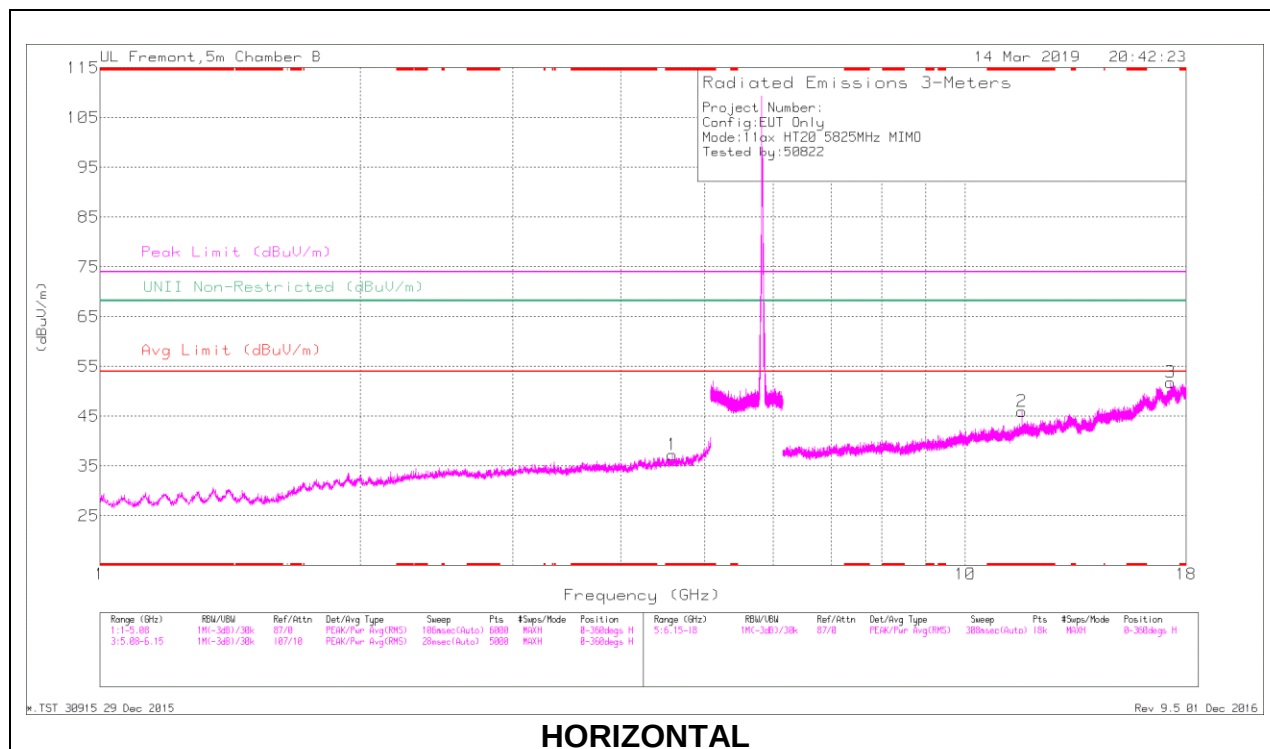

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.588	39.22	PK-U	34.1	-29.1	44.22	-	-	74	-29.78	-	-	88	117	H
	* 4.589	26.63	ADR	34.1	-29.1	31.63	54	-22.37	-	-	-	-	88	117	H
2	* 11.633	34	PK-U	38.7	-20.3	52.4	-	-	74	-21.6	-	-	217	160	H
	* 11.633	21.8	ADR	38.7	-20.3	40.2	54	-13.8	-	-	-	-	217	160	H
5	* 11.633	35.71	PK-U	38.7	-20.3	54.11	-	-	74	-19.89	-	-	267	123	V
	* 11.633	24.51	ADR	38.7	-20.3	42.91	54	-11.09	-	-	-	-	267	123	V
4	2.08	40.87	PK-U	31.1	-31.7	40.27	-	-	-	-	68.2	-27.93	281	169	V
6	14.819	32.72	PK-U	40.9	-19.5	54.12	-	-	-	-	68.2	-14.08	140	271	V
3	17.269	31.64	PK-U	44.5	-17.8	58.34	-	-	-	-	68.2	-9.86	39	152	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.23. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.8 GHz BAND

1TX Antenna 4 MODE – 484 Tones, RU Index 65

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

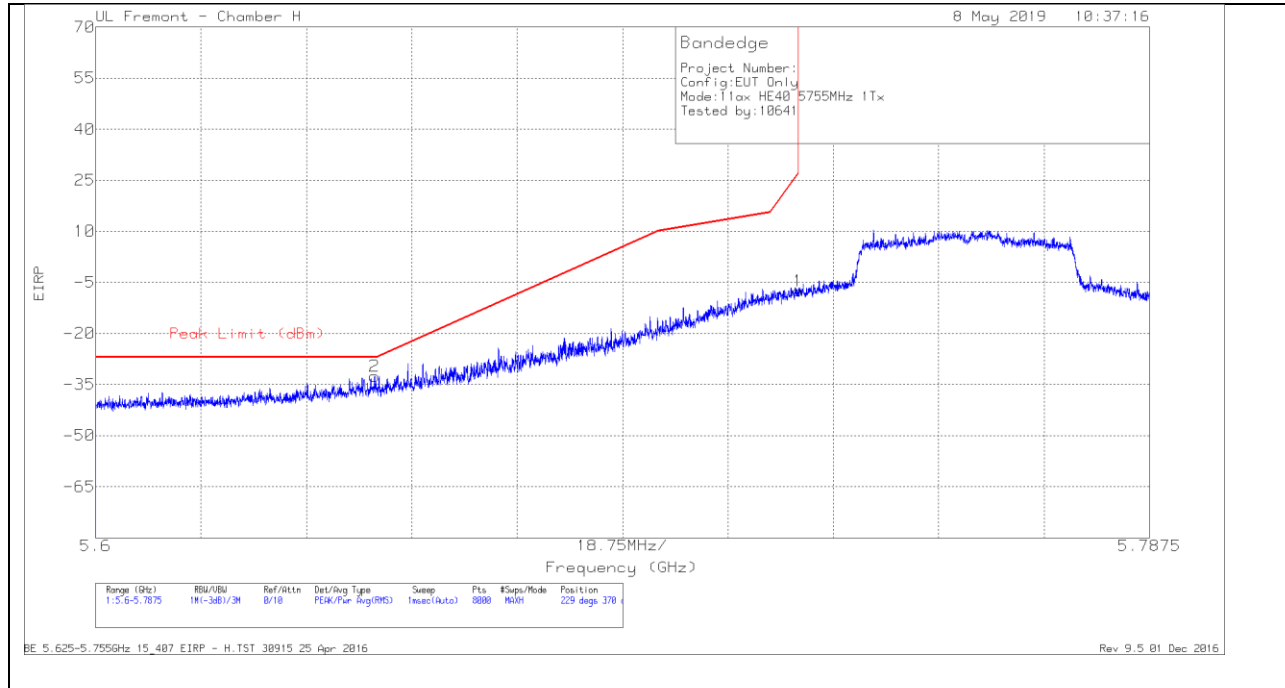

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65	-58.63	Pk	34.9	-20.6	11.8	-32.53	-27	-5.53	229	370	H
1	5.725	-33.65	Pk	35.1	-20.7	11.8	-7.45	26.96	-34.41	229	370	H


Pk - Peak detector

VERTICAL RESULT

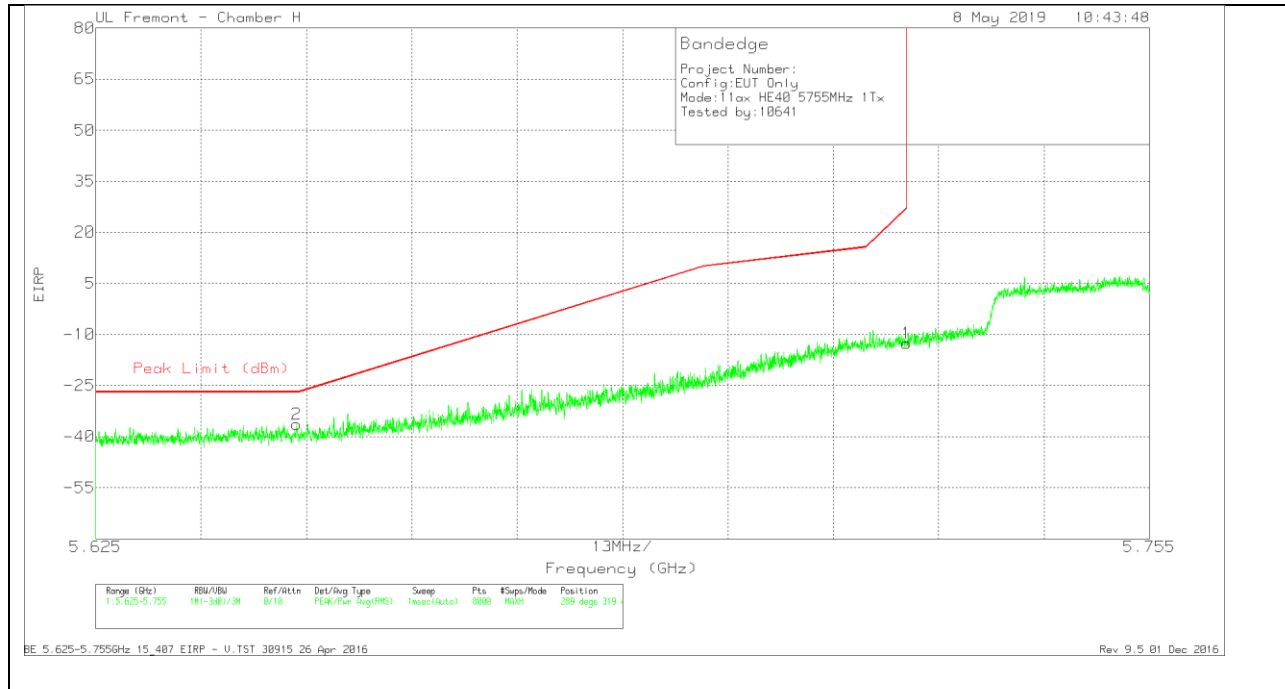

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65	-62.51	Pk	34.9	-20.6	11.8	-36.41	-27	-9.41	289	319	V
1	5.725	-38.85	Pk	35.1	-20.7	11.8	-12.65	27	-39.65	289	319	V


Pk - Peak detector

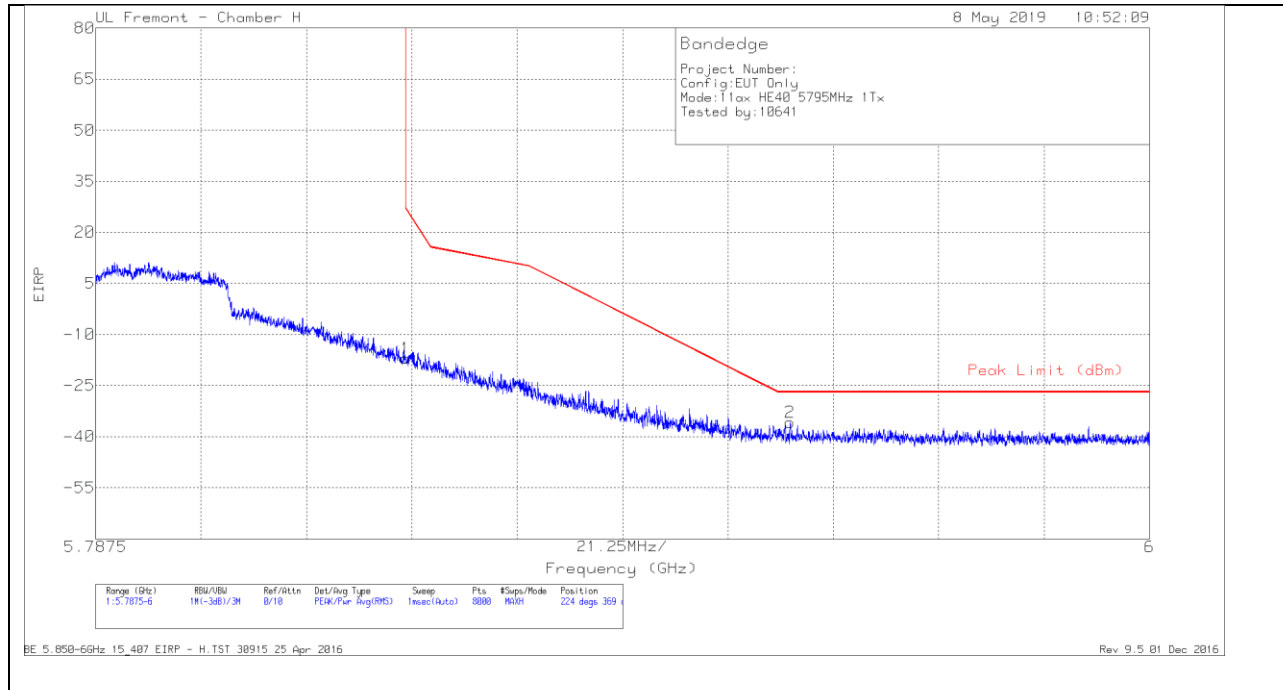BANDEGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-43.96	Pk	35.5	-20.4	11.8	-17.06	26.98	-44.04	224	369	H
2	5.928	-63.08	Pk	35.6	-20.1	11.8	-35.78	-27	-8.78	224	369	H


Pk - Peak detector

VERTICAL RESULT

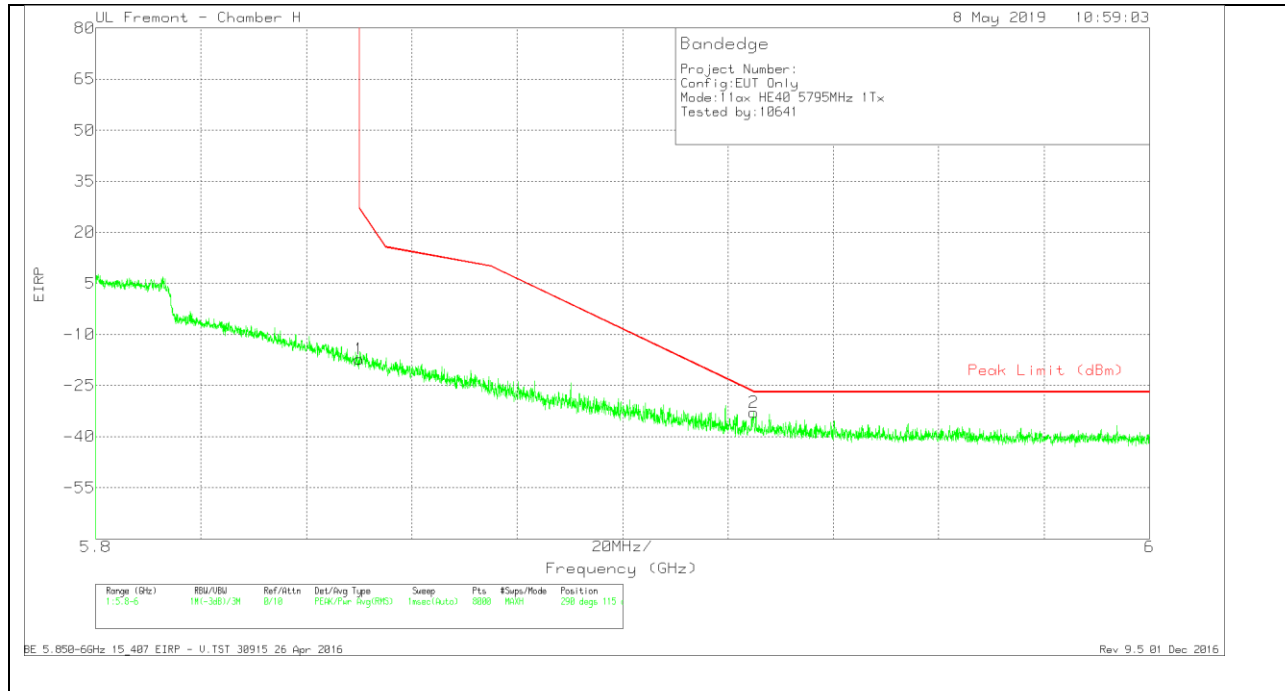

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.18	Pk	35.5	-20.4	11.8	-17.28	26.99	-44.27	290	115	V
2	5.925	-60.13	Pk	35.6	-20.2	11.8	-32.93	-26.92	-6.01	290	115	V


Pk - Peak detector

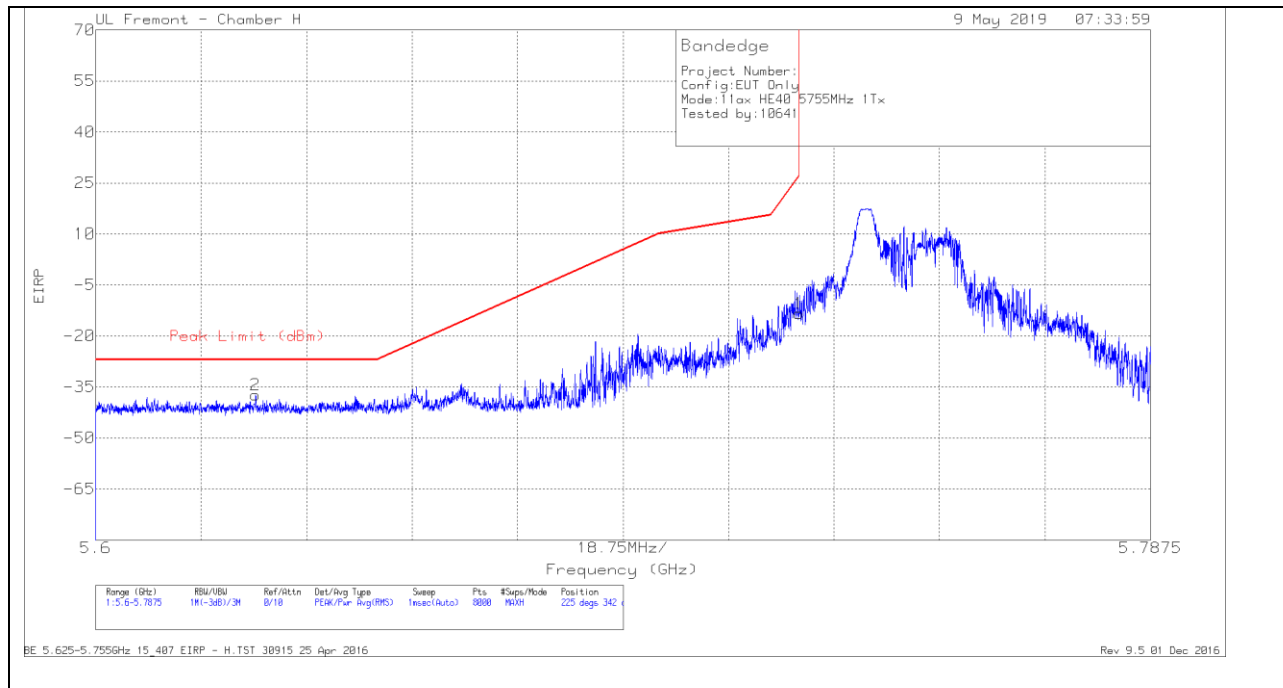1TX Antenna 4 MODE – 26 Tones, RU Index 0**BANDEDGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.628	-63.3	Pk	34.9	-20.7	11.8	-37.3	-27	-10.3	225	342	H
1	5.725	-39.64	Pk	35.1	-20.7	11.8	-13.44	26.96	-40.4	225	342	H


Pk - Peak detector

VERTICAL RESULT

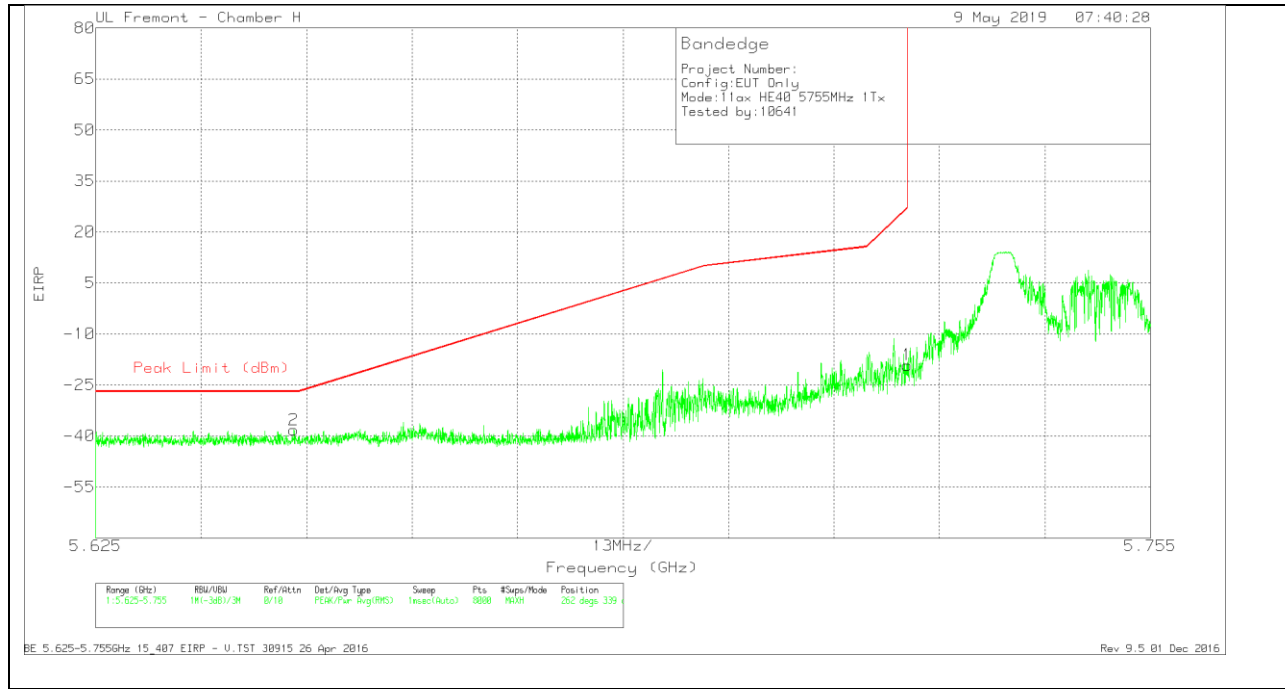

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649	-64.4	Pk	34.9	-20.6	11.8	-38.3	-27	-11.3	262	339	V
1	5.725	-45.35	Pk	35.1	-20.7	11.8	-19.15	27	-46.15	262	339	V


Pk - Peak detector

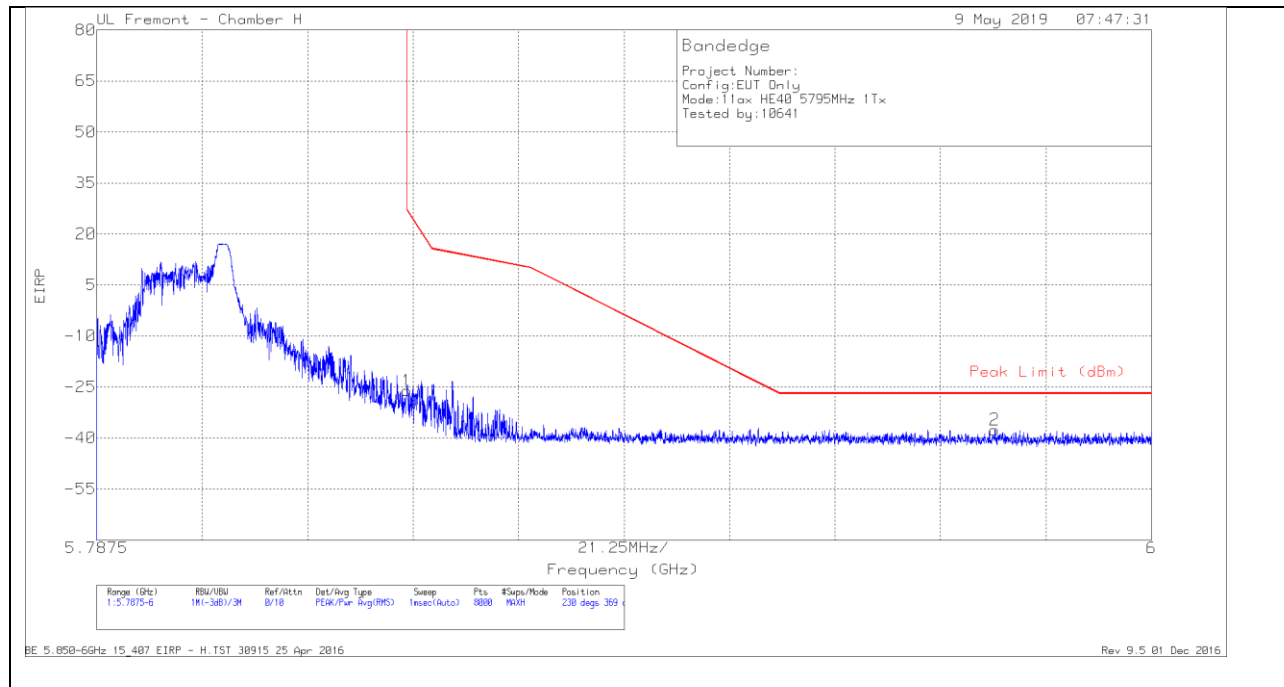1TX Antenna 4 MODE – 26 Tones, RU Index 17**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbll/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.92	Pk	35.5	-20.4	11.8	-26.02	26.98	-53	230	369	H
2	5.968	-64.88	Pk	35.5	-20	11.8	-37.58	-27	-10.58	230	369	H


Pk - Peak detector

VERTICAL RESULT

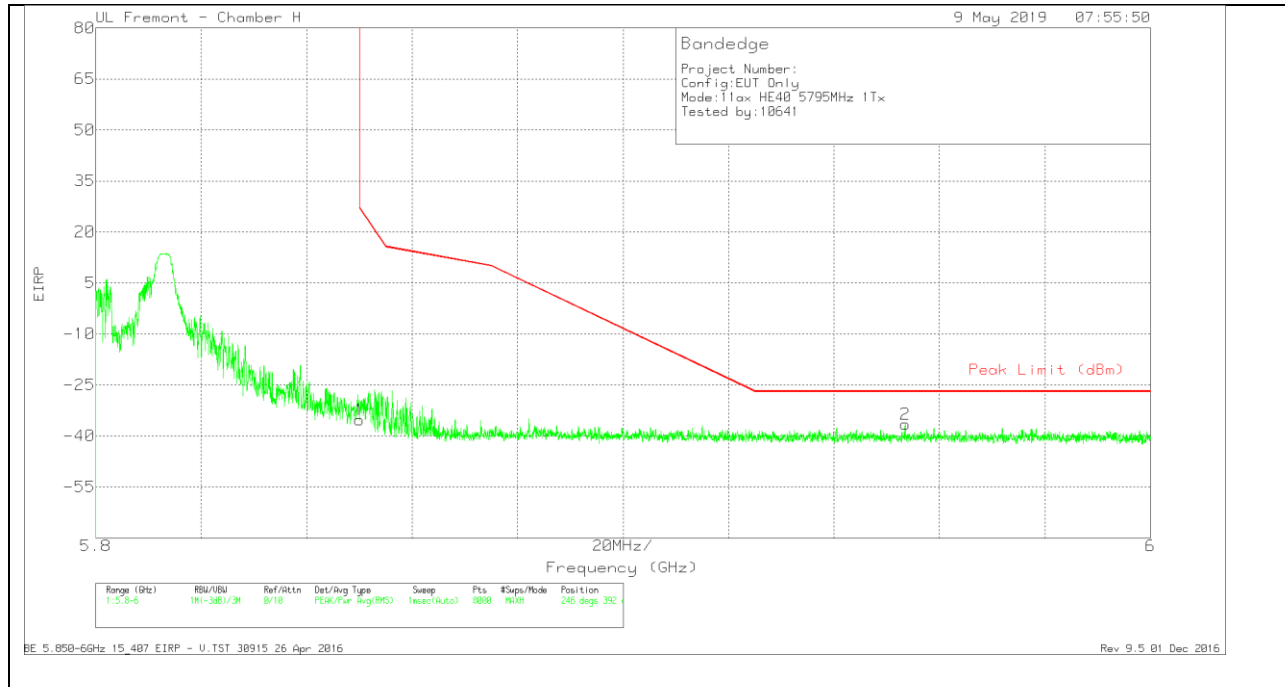

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-62.24	Pk	35.5	-20.4	11.8	-35.34	26.99	-62.33	246	392	V
2	5.954	-63.63	Pk	35.5	-20.2	11.8	-36.53	-27	-9.53	246	392	V


Pk - Peak detector

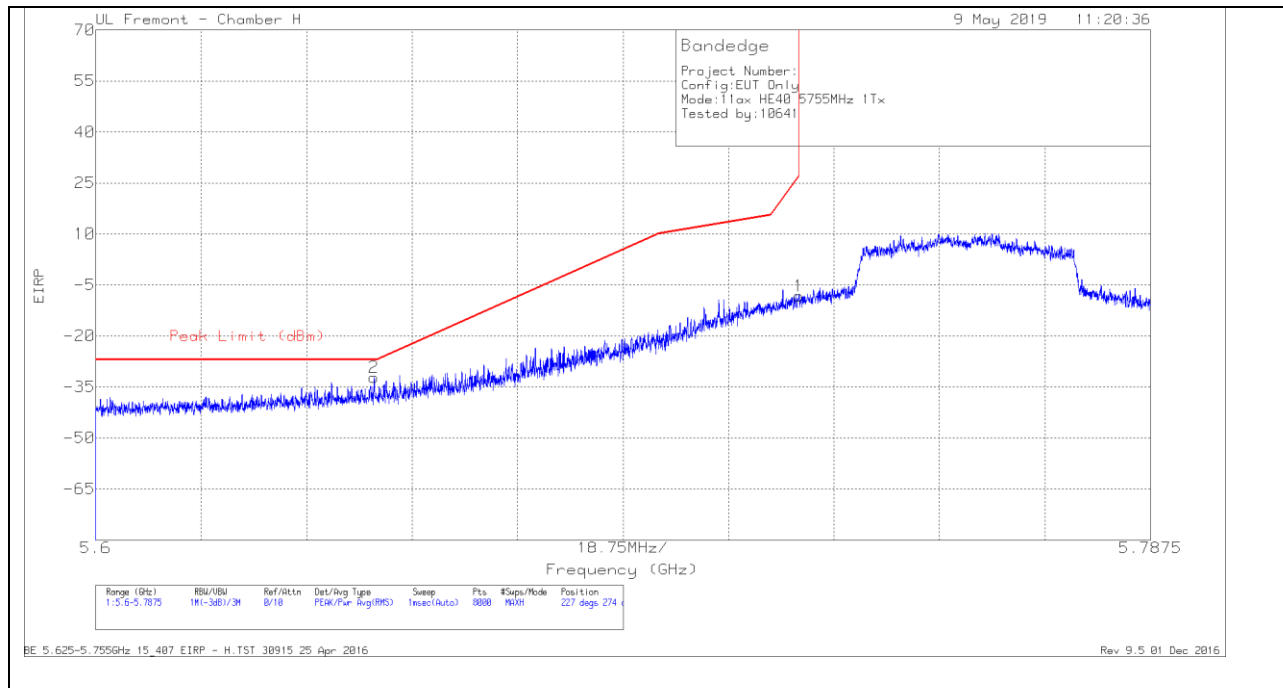1TX Antenna 5 MODE – 484 Tones, RU Index 65**BANDEGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649	-58.27	Pk	34.9	-20.6	11.8	-32.17	-27	-5.17	227	274	H
1	5.725	-34.44	Pk	35.1	-20.7	11.8	-8.24	26.96	-35.2	227	274	H


Pk - Peak detector

VERTICAL RESULT

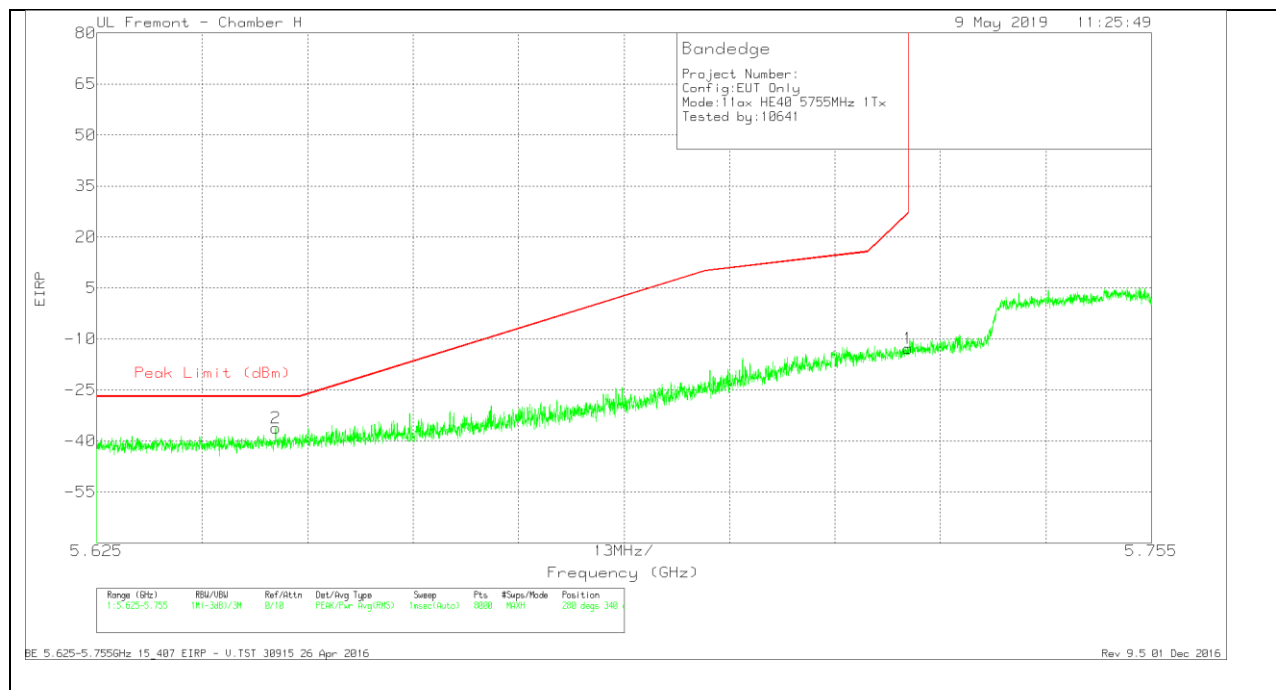

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647	-62.47	Pk	35	-20.6	11.8	-36.27	-27	-9.27	280	340	V
1	5.725	-39.05	Pk	35.1	-20.7	11.8	-12.85	27	-39.85	280	340	V


Pk - Peak detector

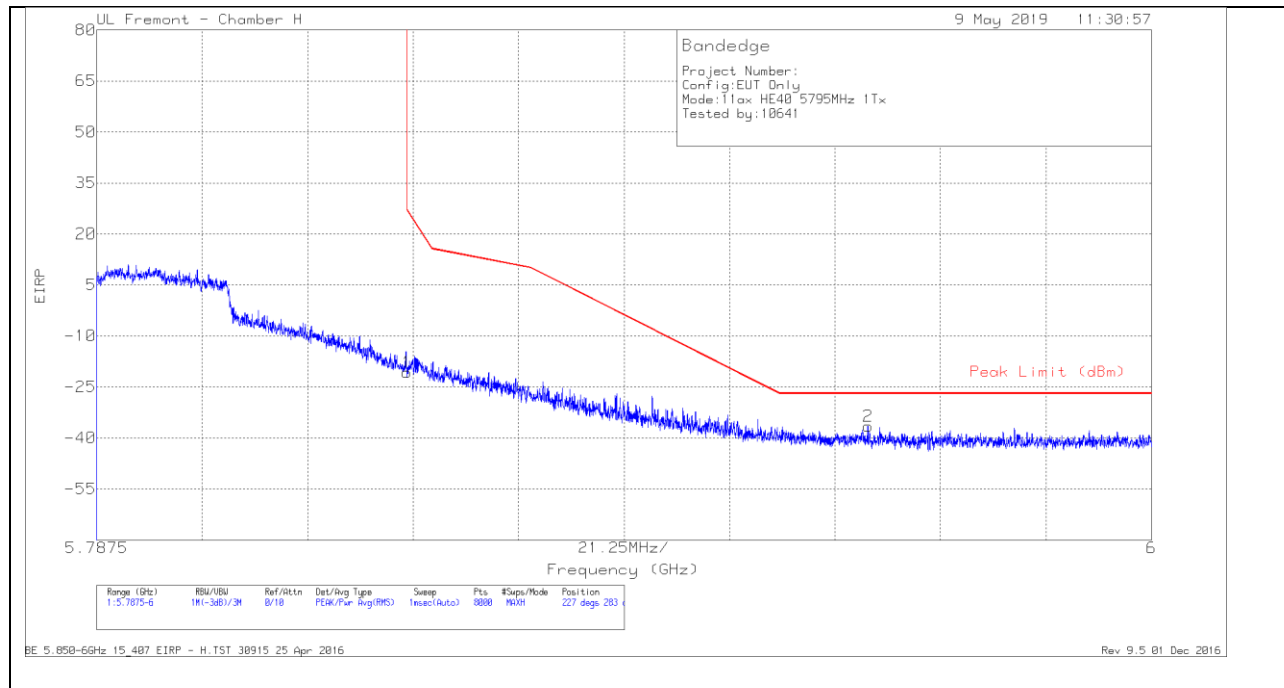BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-47.65	Pk	35.5	-20.4	11.8	-20.75	26.98	-47.73	227	283	H
2	5.943	-63.93	Pk	35.6	-20.1	11.8	-36.63	-27	-9.63	227	283	H


Pk - Peak detector

VERTICAL RESULT

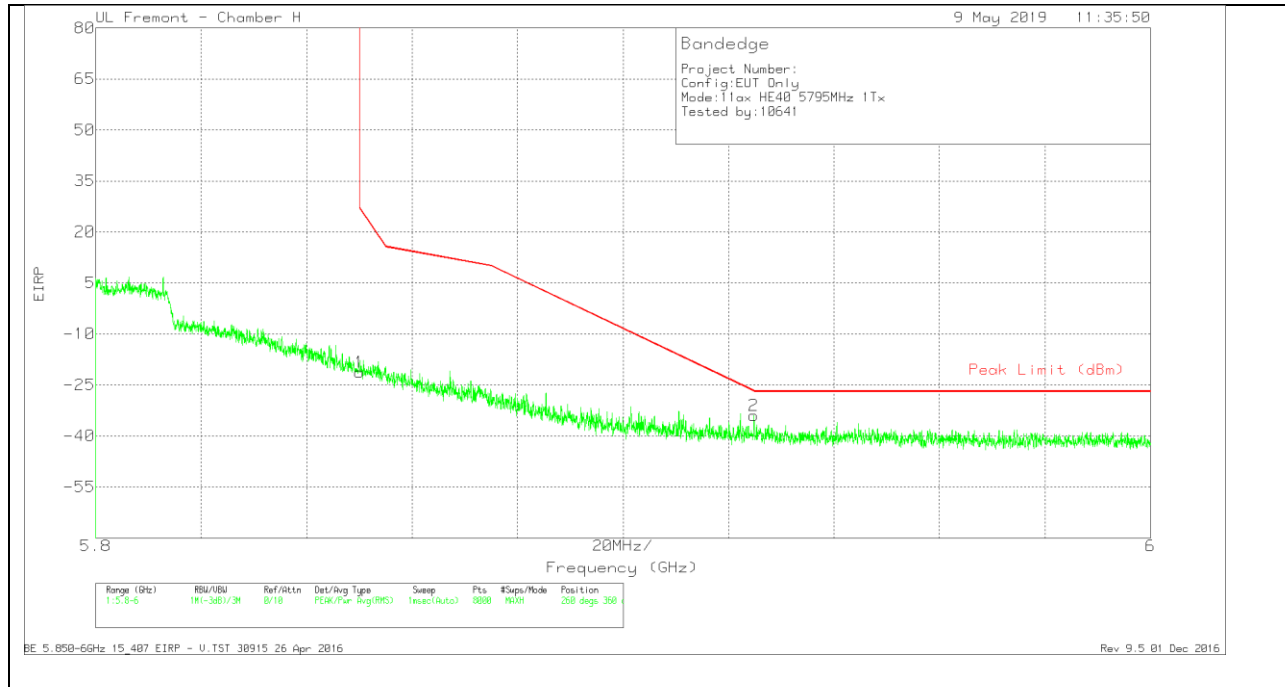

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.15	Pk	35.5	-20.4	11.8	-21.25	26.99	-48.24	260	360	V
2	5.925	-61.26	Pk	35.6	-20.2	11.8	-34.06	-26.84	-7.22	260	360	V


Pk - Peak detector

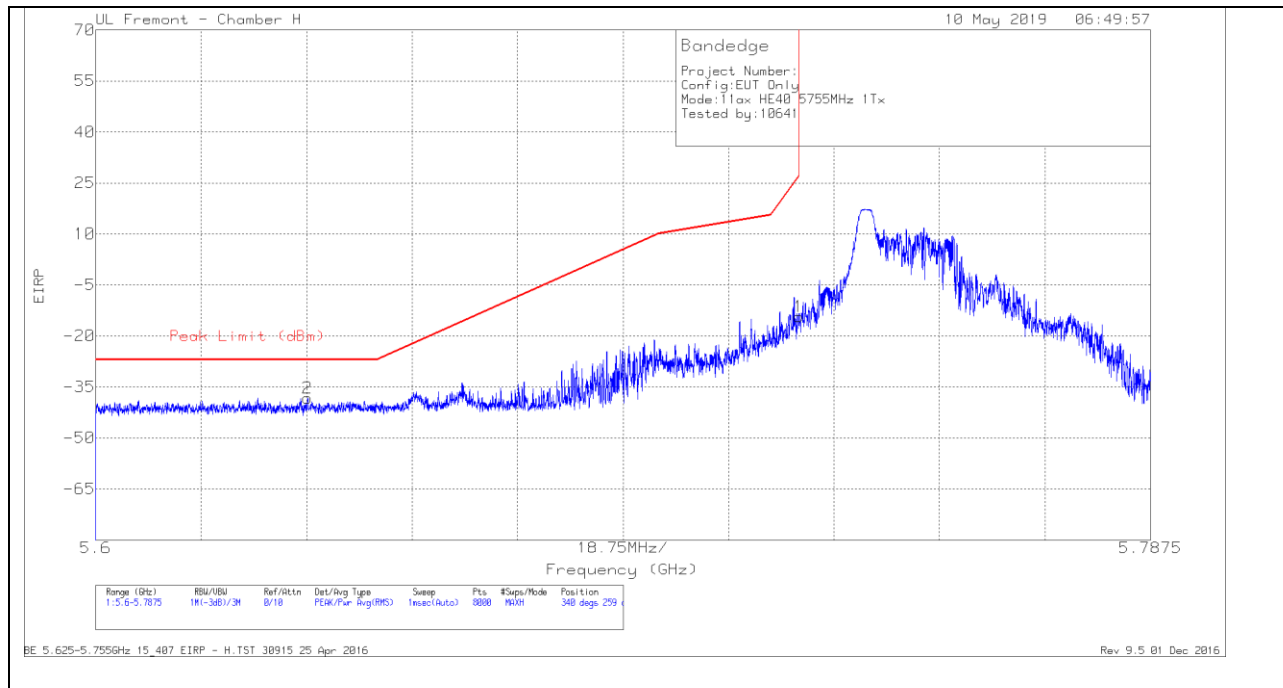1TX Antenna 5 MODE – 26 Tones, RU Index 0**BANDEGE (LOW CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.638	-64.36	Pk	34.9	-20.6	11.8	-38.26	-27	-11.26	340	259	H
1	5.725	-40.51	Pk	35.1	-20.7	11.8	-14.31	26.96	-41.27	340	259	H


Pk - Peak detector

VERTICAL RESULT

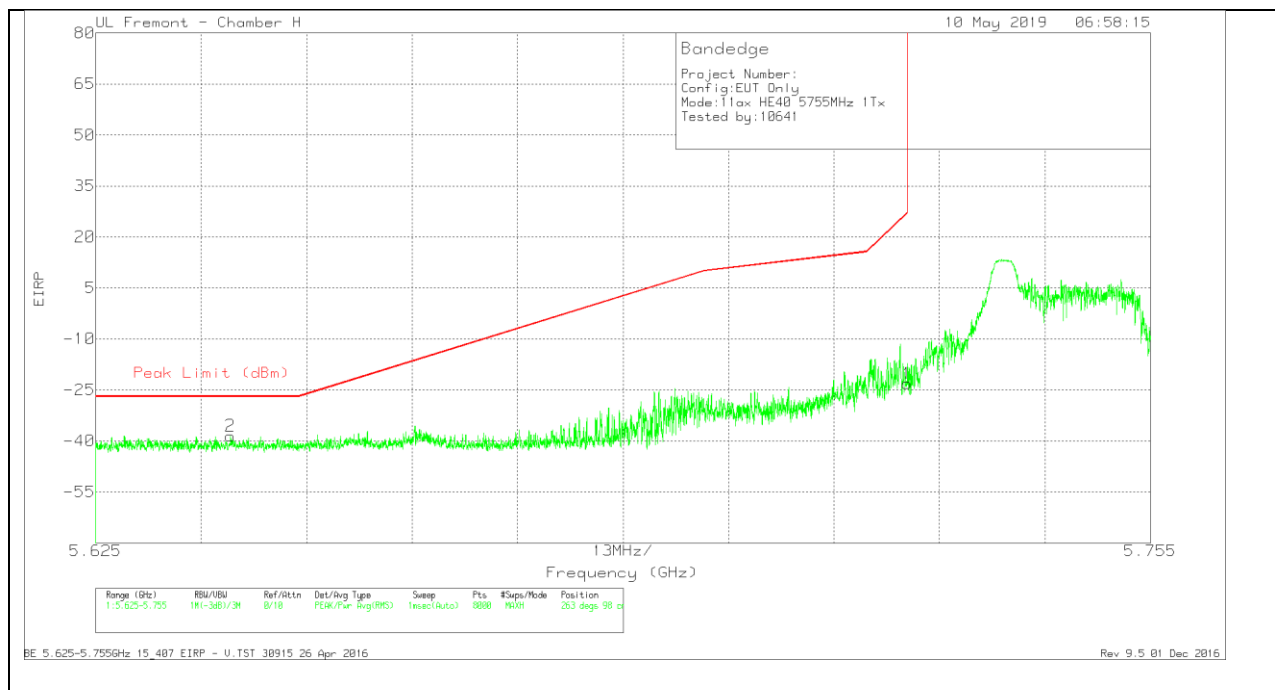

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.642	-64.7	Pk	35	-20.6	11.8	-38.5	-27	-11.5	263	98	V
1	5.725	-49.28	Pk	35.1	-20.7	11.8	-23.08	27	-50.08	263	98	V


Pk - Peak detector

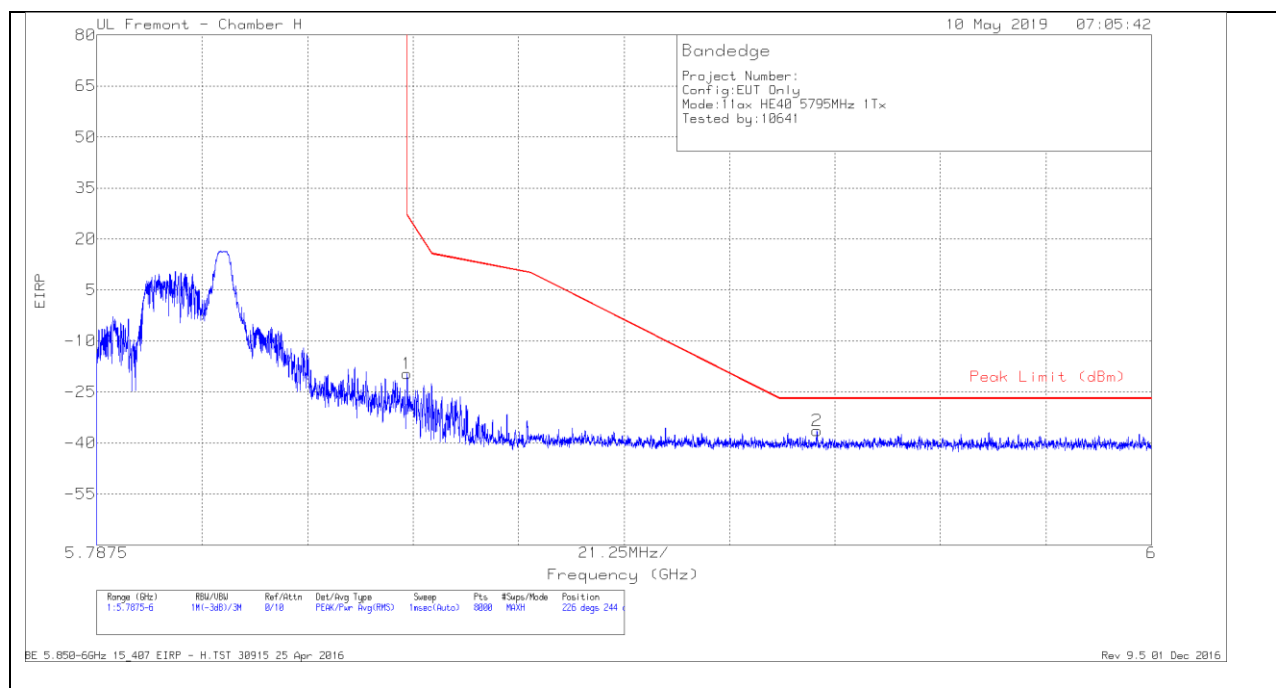1TX Antenna 5 MODE – 26 Tones, RU Index 17**BANDEDGE (HIGH CHANNEL)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbll/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-46.56	Pk	35.5	-20.4	11.8	-19.66	26.98	-46.64	226	244	H
2	5.933	-63.5	Pk	35.6	-20.2	11.8	-36.3	-27	-9.3	226	244	H


Pk - Peak detector

VERTICAL RESULT

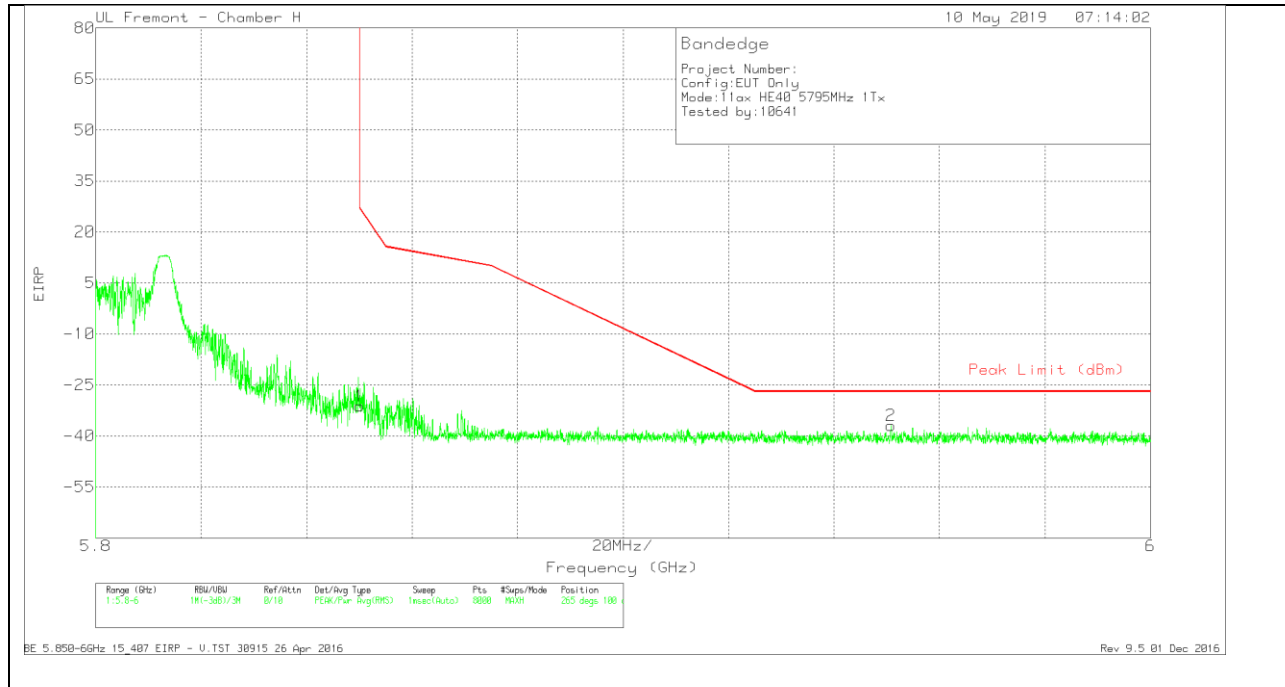

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-58.12	Pk	35.5	-20.4	11.8	-31.22	26.99	-58.21	265	100	V
2	5.951	-64.2	Pk	35.6	-20.2	11.8	-37	-27	-10	265	100	V


Pk - Peak detector

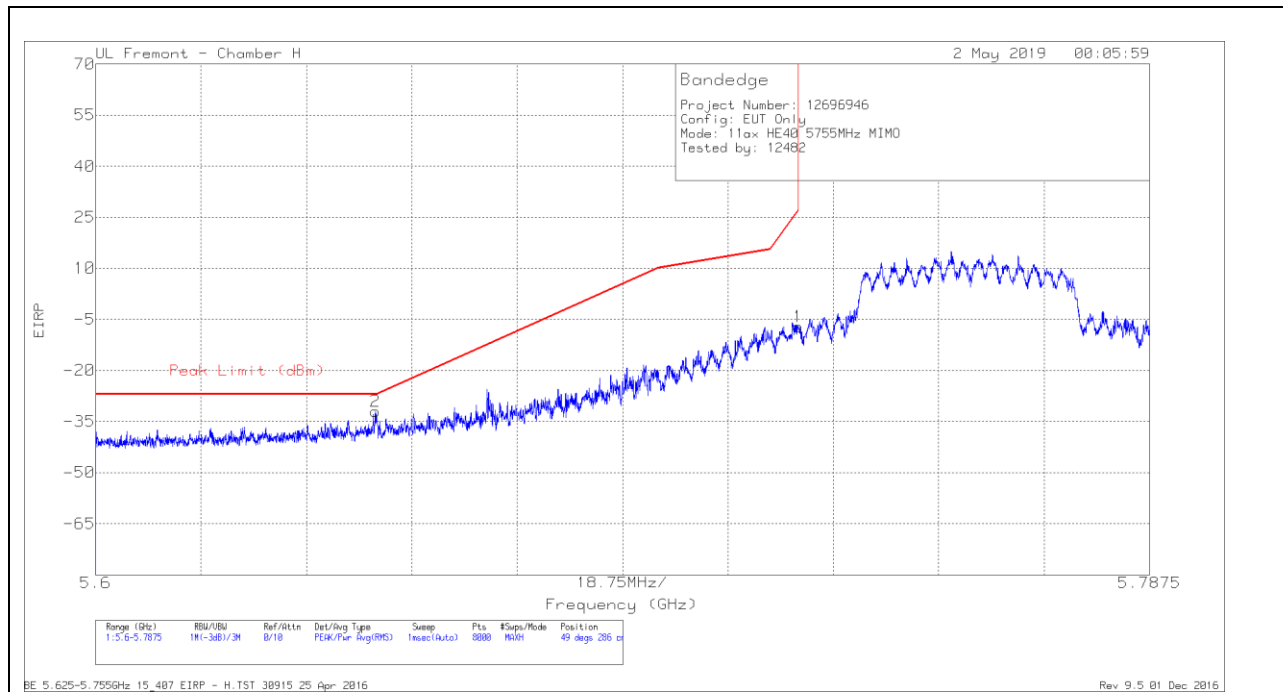BANDEDGE (LOW CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65	-58.16	Pk	34.9	-20.6	11.8	-32.06	-27	-5.06	49	286	H
1	5.725	-33.37	Pk	35.1	-20.7	11.8	-7.17	26.96	-34.13	49	286	H


Pk - Peak detector

VERTICAL RESULT

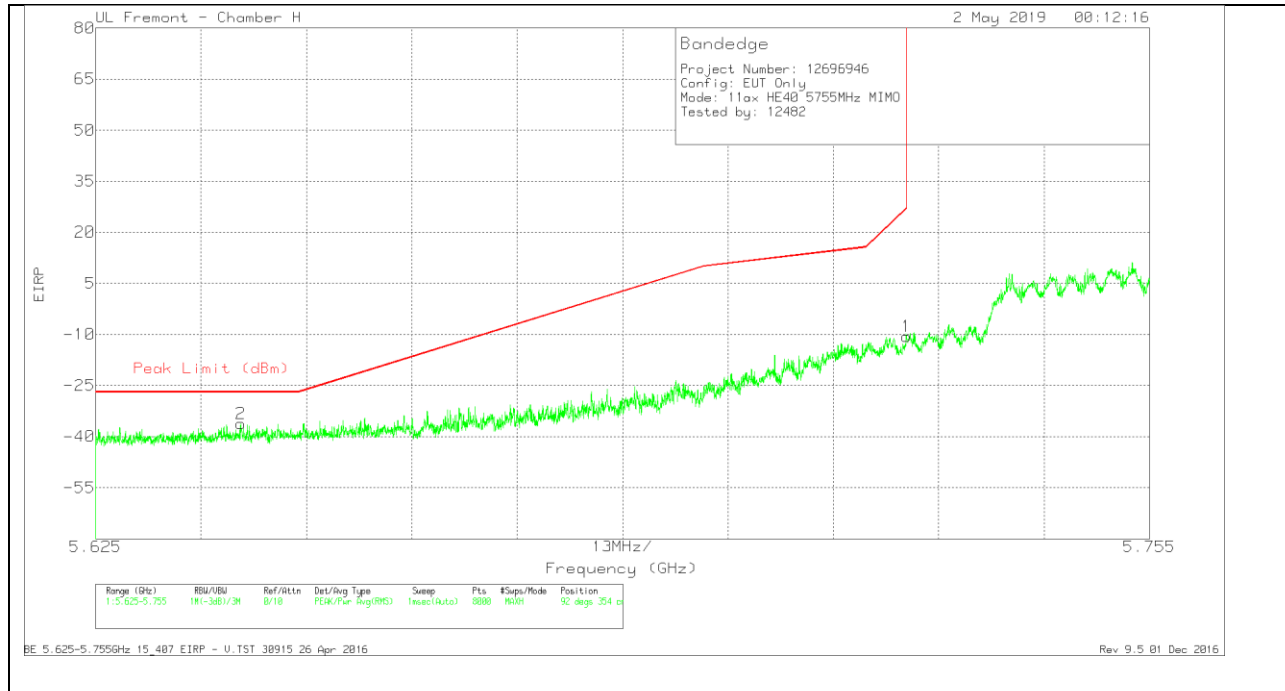

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.643	-62.43	Pk	35	-20.6	11.8	-36.23	-27	-9.23	92	354	V
1	5.725	-36.77	Pk	35.1	-20.7	11.8	-10.57	27	-37.57	92	354	V


Pk - Peak detector

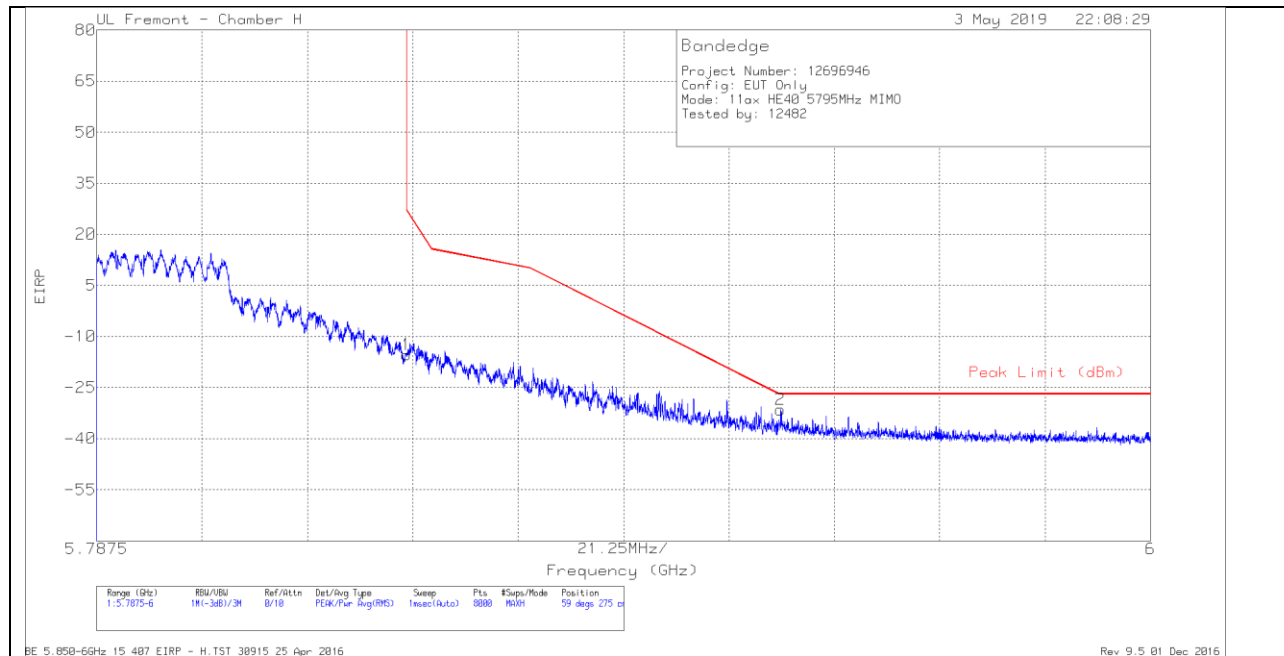BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.19	Pk	35.5	-20.4	11.8	-15.29	26.98	-42.27	59	275	H
2	5.925	-58.69	Pk	35.6	-20.2	11.8	-31.49	-27	-4.49	59	275	H



Pk - Peak detector

VERTICAL RESULT

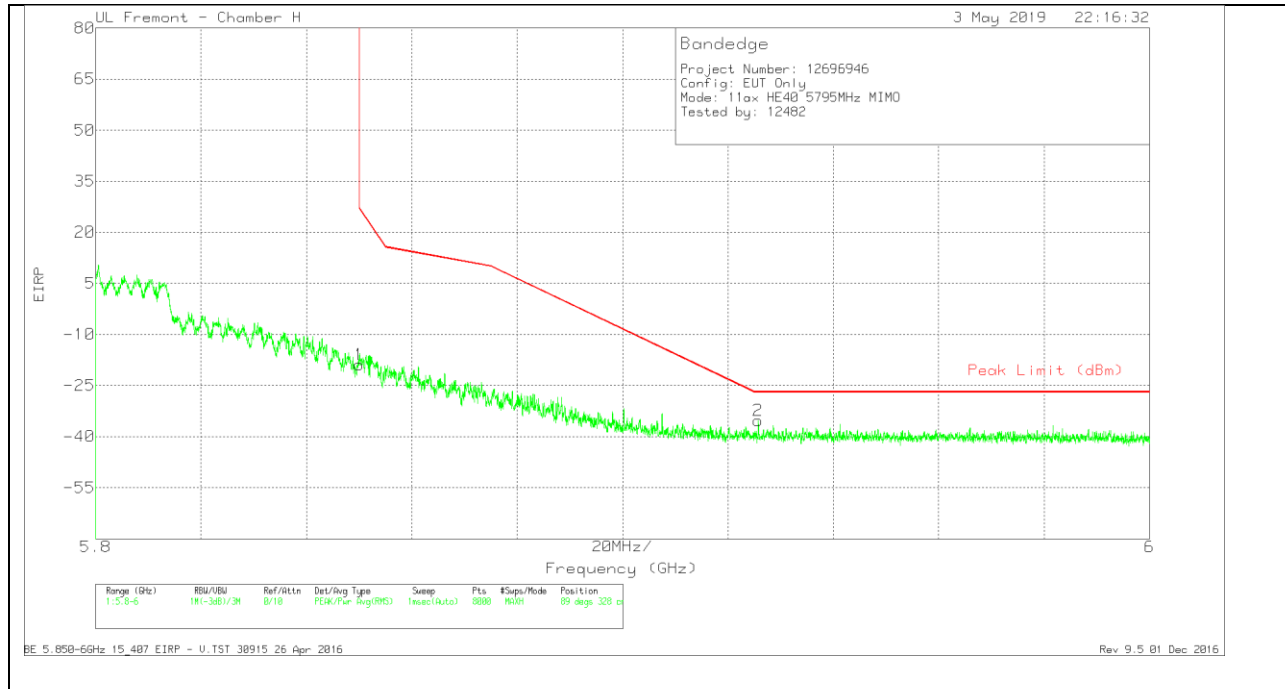

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-45.7	Pk	35.5	-20.4	11.8	-18.8	26.99	-45.79	89	328	V
2	5.926	-62.56	Pk	35.6	-20.1	11.8	-35.26	-27	-8.26	89	328	V

Pk - Peak detector

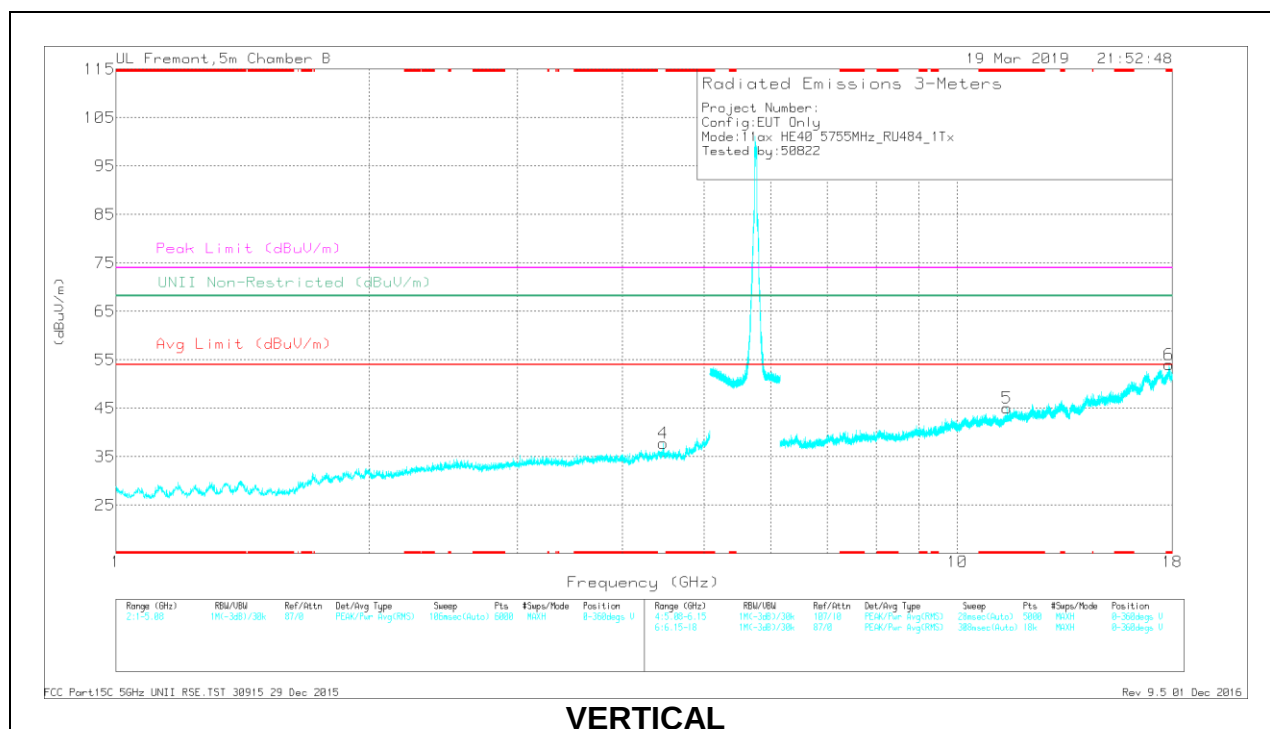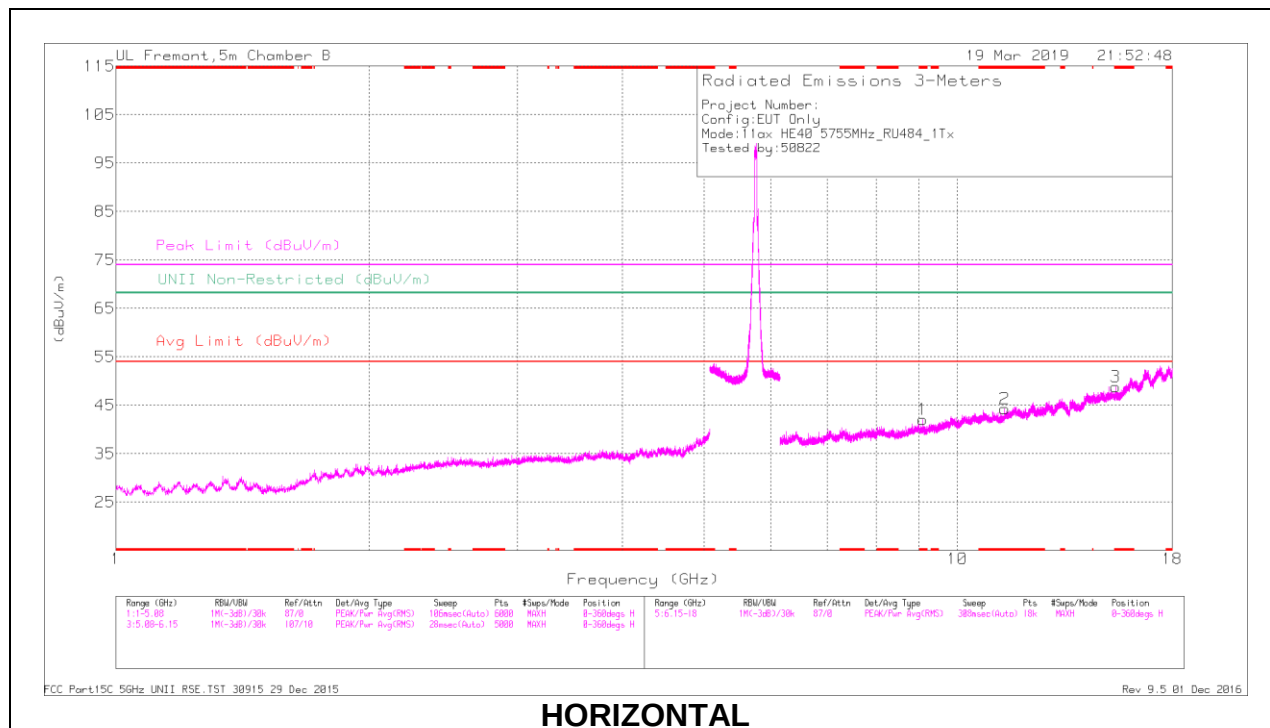HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading 9 (dBuV)	Det	AF T863 (dBm)	Amp/Cali/Fit/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 9.097	35.14	PK-U	36.8	-23.8	0	48.14	-	-	74	-25.86	-	-	292	129	H
	* 9.096	23	ADR	36.8	-23.8	.1	36.1	54	-17.9	-	-	-	-	292	129	H
2	* 11.38	33.38	PK-U	38.4	-20.8	0	50.98	-	-	74	-23.02	-	-	158	262	H
	* 11.382	21.49	ADR	38.4	-20.8	.1	39.19	54	-14.81	-	-	-	-	158	262	H
3	* 15.413	32.73	PK-U	40.9	-18.7	0	54.93	-	-	74	-19.07	-	-	360	277	H
	* 15.415	21.03	ADR	40.9	-18.6	.1	43.43	54	-10.57	-	-	-	-	360	277	H
5	* 11.446	33.16	PK-U	38.4	-20.8	0	50.76	-	-	74	-23.24	-	-	355	134	V
	* 11.447	21.55	ADR	38.4	-20.8	.1	39.25	54	-14.75	-	-	-	-	355	134	V
6	* 17.834	32.37	PK-U	44.4	-16.8	0	59.97	-	-	74	-14.03	-	-	103	255	V
	* 17.832	20.89	ADR	44.4	-16.7	.1	48.69	54	-5.31	-	-	-	-	103	255	V
4	4.47	38.6	PK-U	33.8	-27.7	0	44.7	-	-	-	-	68.2	-23.5	87	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

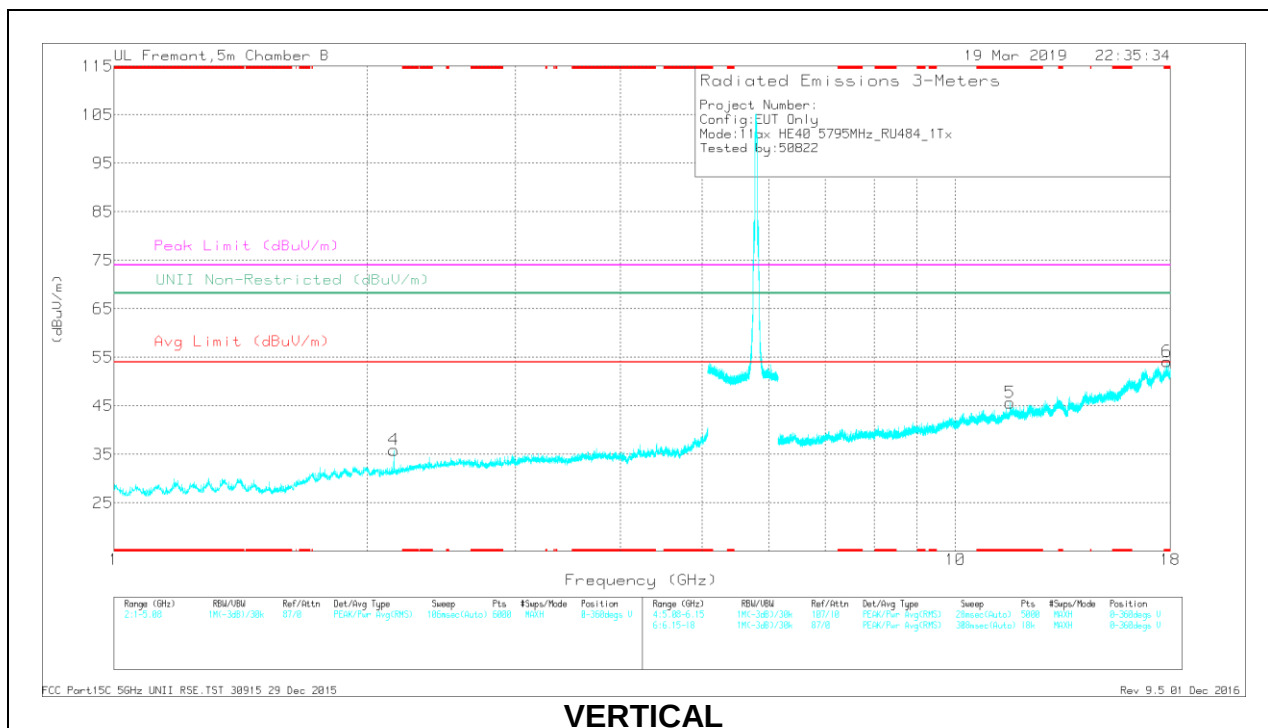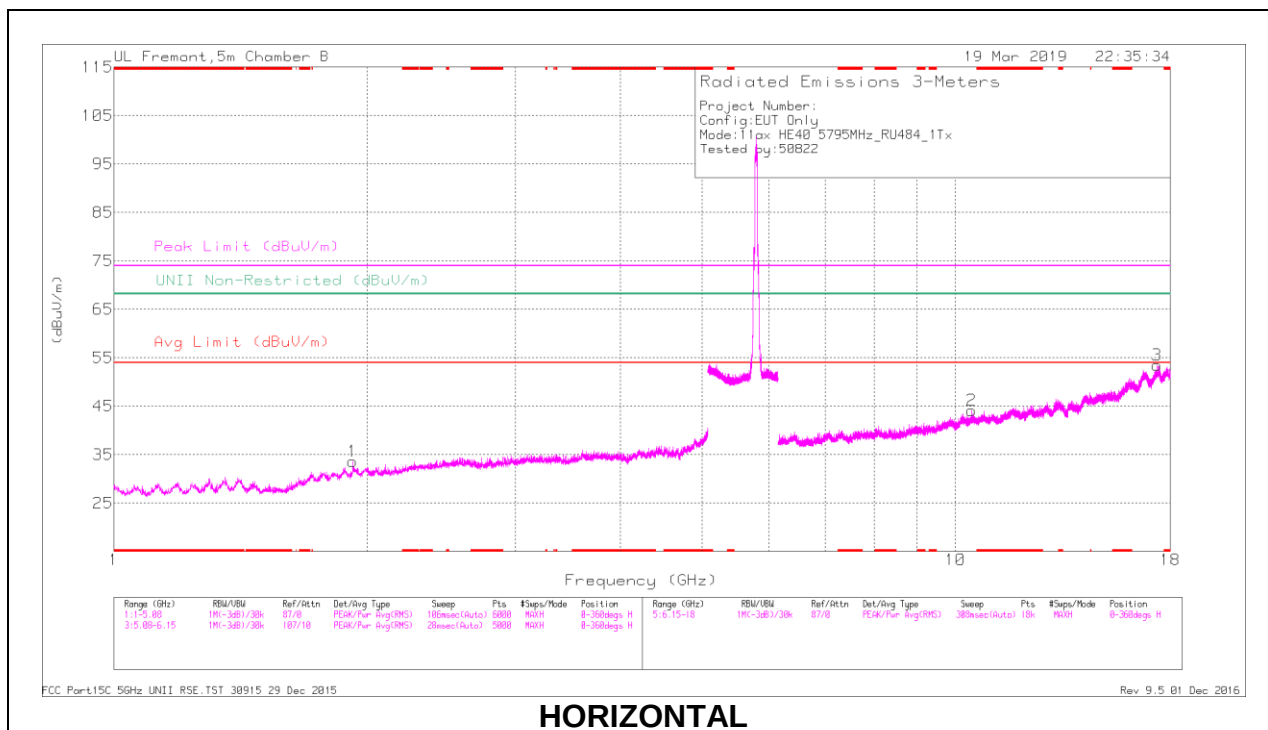


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
5	* 11.617	33.43	PK-U	38.7	-20.5	0	51.63	-	-	74	-22.37	-	-	69	141	V
	* 11.615	21.45	ADR	38.7	-20.5	.1	39.75	54	-14.25	-	-	-	-	69	141	V
6	* 17.83	32.74	PK-U	44.4	-16.7	0	60.44	-	-	74	-13.56	-	-	169	319	V
	* 17.832	20.91	ADR	44.4	-16.7	.1	48.71	54	-5.29	-	-	-	-	169	319	V
1	1.923	39.91	PK-U	31	-31.3	0	39.61	-	-	-	-	68.2	-28.59	107	300	H
4	2.15	41.01	PK-U	31.3	-32	0	40.31	-	-	-	-	68.2	-27.89	297	338	V
2	10.446	33.71	PK-U	37.8	-21.2	0	50.31	-	-	-	-	68.2	-17.89	293	231	H
3	17.365	33.29	PK-U	44.4	-17.6	0	60.09	-	-	-	-	68.2	-8.11	343	227	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

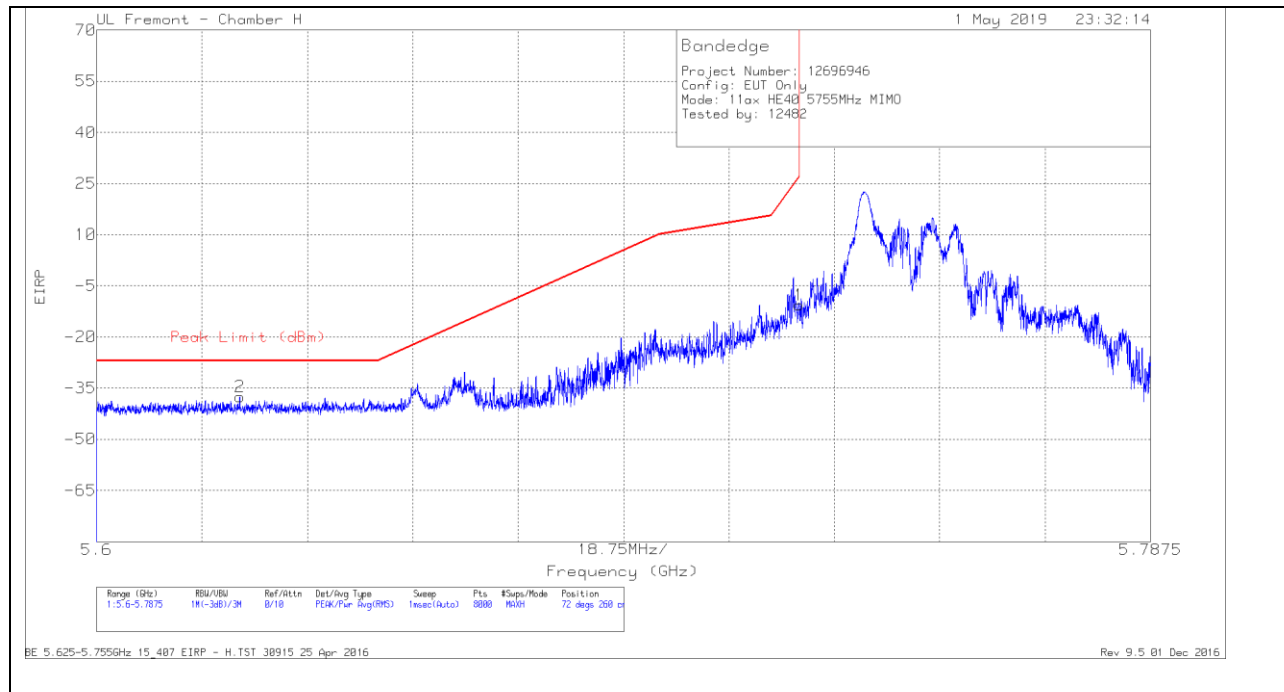BANDEDGE (LOW CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.625	-63.6	Pk	34.9	-20.7	11.8	-37.6	-27	-10.6	72	260	H
1	5.725	-36.77	Pk	35.1	-20.7	11.8	-10.57	26.96	-37.53	72	260	H


Pk - Peak detector

VERTICAL RESULT

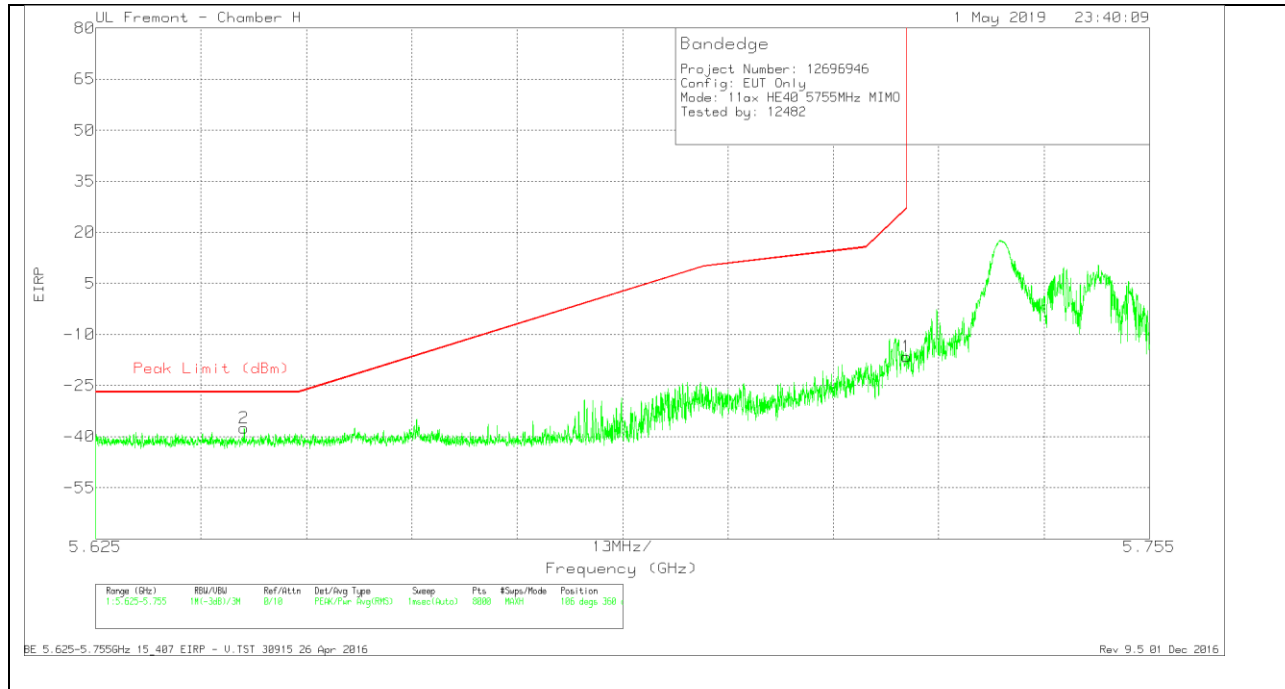

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.643	-37.76	Pk	35	-20.6	11.8	-37.56	-27	-10.56	106	360	V
1	5.725	-42.65	Pk	35.1	-20.7	11.8	-16.45	27	-43.45	106	360	V


Pk - Peak detector

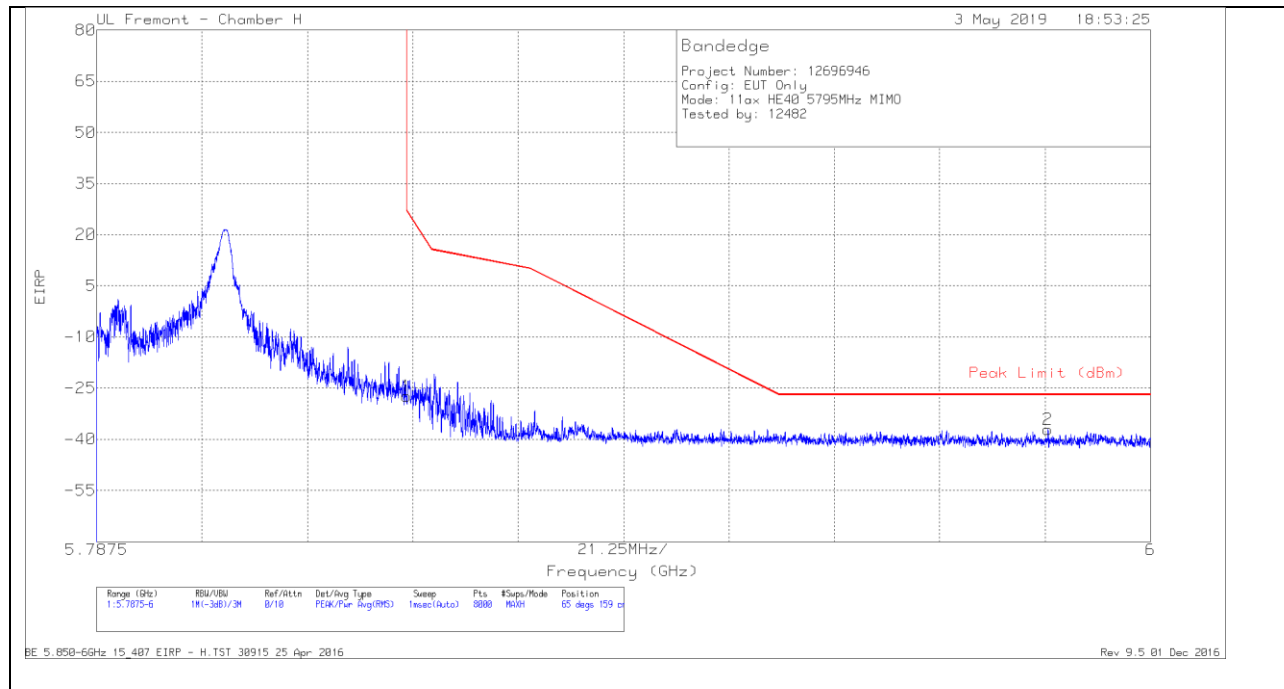BANDEDGE (HIGH CHANNEL)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-54.32	Pk	35.5	-20.4	11.8	-27.42	26.98	-54.4	65	159	H
2	5.979	-64.44	Pk	35.6	-20	11.8	-37.04	-27	-10.04	65	159	H



Pk - Peak detector

VERTICAL RESULT

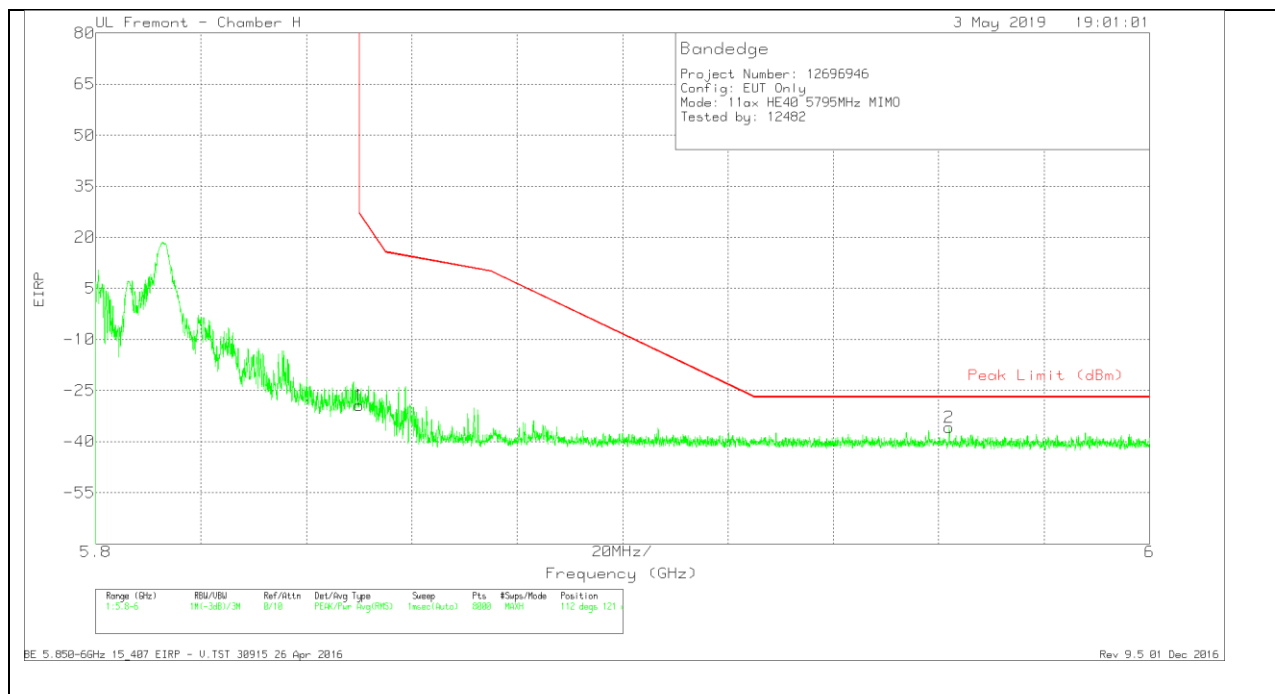

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-56.23	Pk	35.5	-20.4	11.8	-29.33	26.99	-56.32	112	121	V
2	5.962	-63.26	Pk	35.7	-20.1	11.8	-35.86	-27	-8.86	112	121	V

Pk - Peak detector

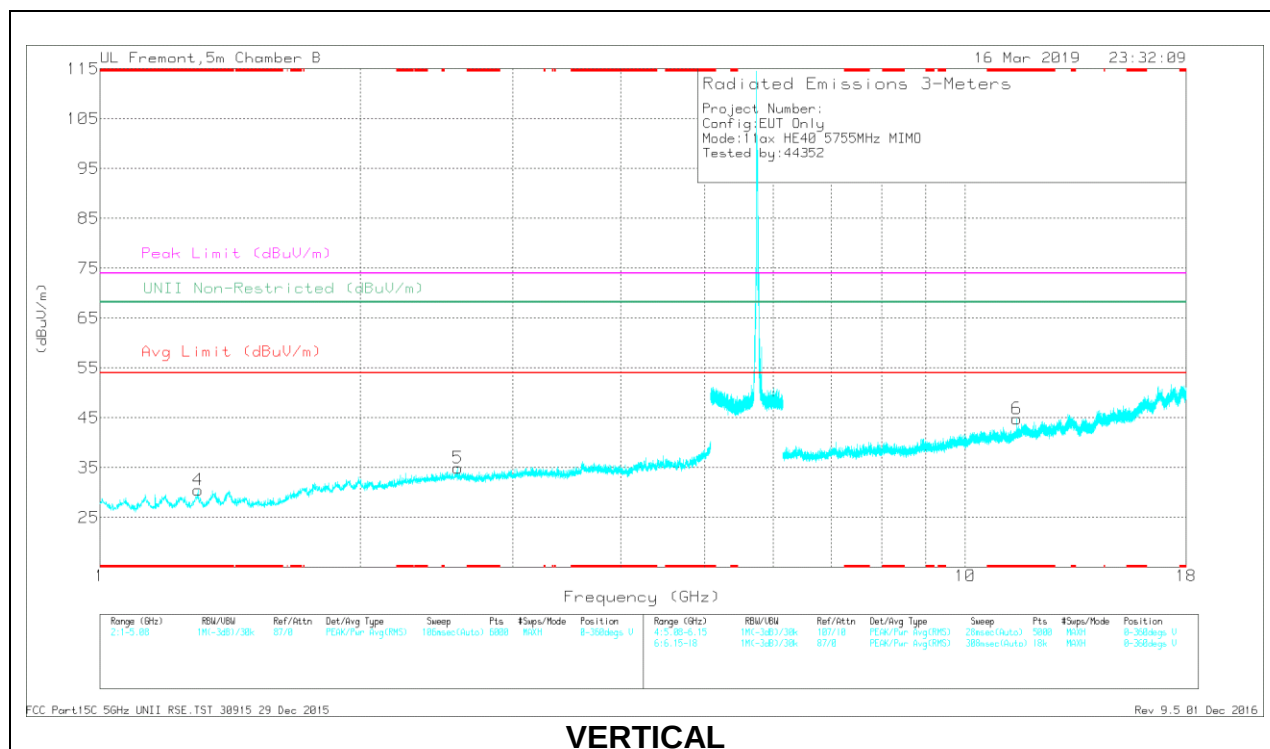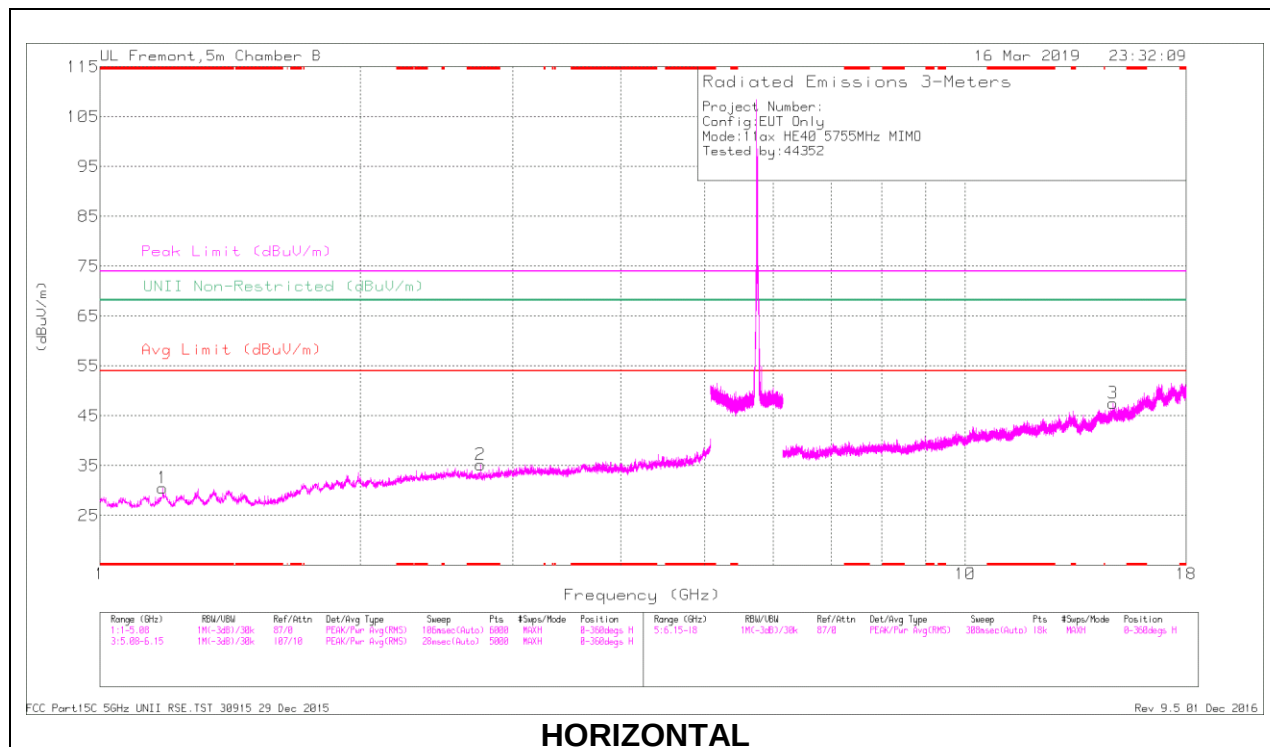2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 8**HARMONICS AND SPURIOUS EMISSIONS****LOW CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.183	41.85	PK-U	28	-33.2	36.65	-	-	74	-37.35	-	-	75	300	H
	* 1.183	29.9	ADR	28	-33.2	24.7	54	-29.3	-	-	-	-	75	300	H
2	* 2.754	39.61	PK-U	32.4	-31.2	40.81	-	-	74	-33.19	-	-	241	400	H
	* 2.751	27.59	ADR	32.3	-31.2	28.69	54	-25.31	-	-	-	-	241	400	H
4	* 1.298	42.28	PK-U	28.4	-33.2	37.48	-	-	74	-36.52	-	-	95	381	V
	* 1.298	29.89	ADR	28.4	-33.2	25.09	54	-28.91	-	-	-	-	95	381	V
6	* 11.473	37.08	PK-U	38.4	-21	54.48	-	-	74	-19.52	-	-	269	105	V
	* 11.474	23.95	ADR	38.4	-21	41.35	54	-12.65	-	-	-	-	269	105	V
5	2.591	39.55	PK-U	32.7	-30.7	41.55	-	-	-	-	68.2	-26.65	246	193	V
3	14.818	32.77	PK-U	40.9	-19.5	54.17	-	-	-	-	68.2	-14.03	106	165	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

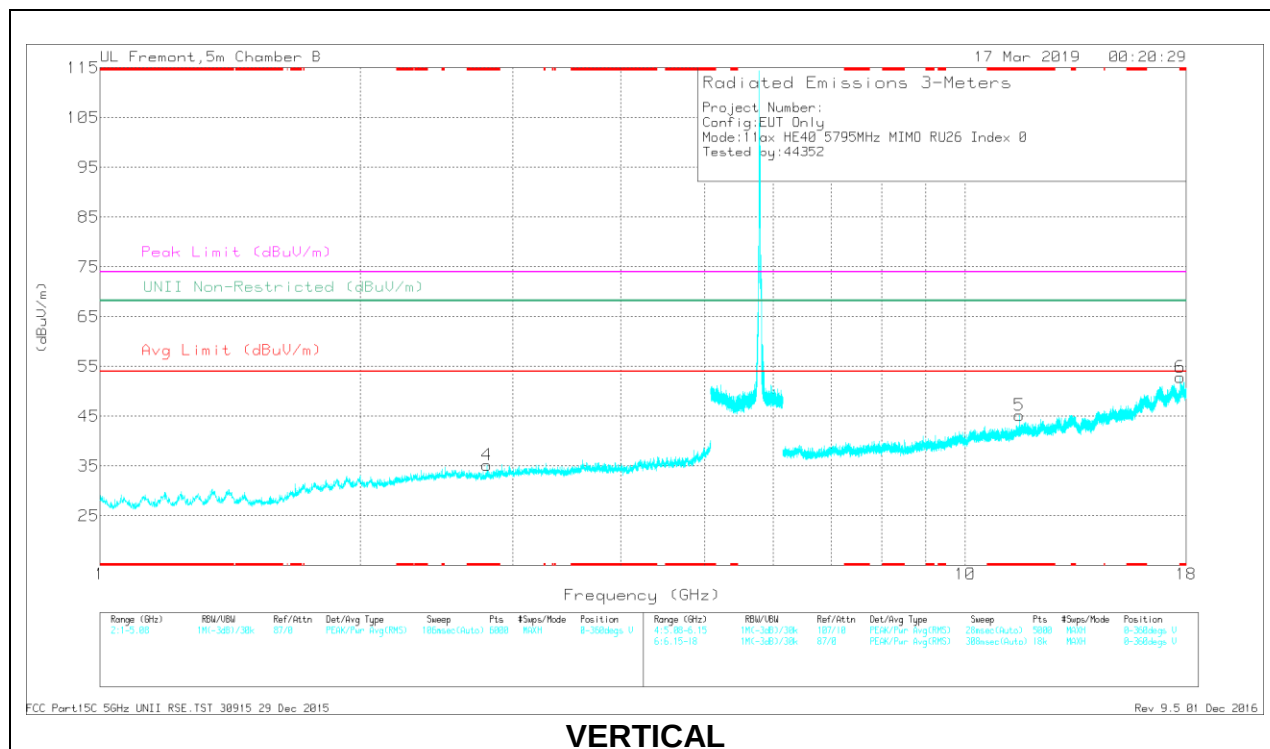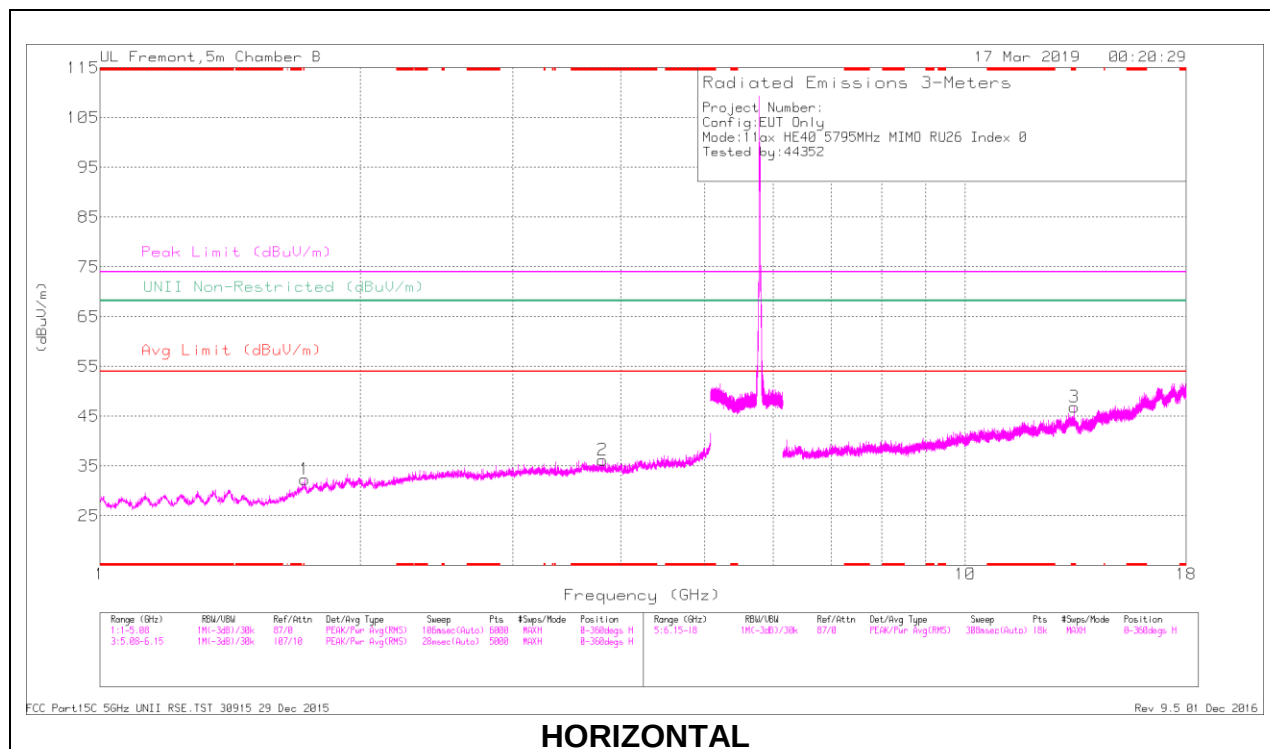

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.811	40.05	PK-U	33.4	-29.6	43.85	-	-	74	-30.15	-	-	349	231	H
	* 3.814	27	ADR	33.4	-29.6	30.8	54	-23.2	-	-	-	-	349	231	H
4	* 2.802	40.22	PK-U	32.4	-31	41.62	-	-	74	-32.38	-	-	346	203	V
	* 2.803	27.77	ADR	32.4	-30.9	29.27	54	-24.73	-	-	-	-	346	203	V
3	* 13.358	32.61	PK-U	40.5	-20.9	52.21	-	-	74	-21.79	-	-	122	147	H
	* 13.36	18.94	ADR	40.5	-20.9	38.54	54	-15.46	-	-	-	-	122	147	H
5	* 11.553	36.58	PK-U	38.5	-21.2	53.88	-	-	74	-20.12	-	-	113	141	V
	* 11.554	24.04	ADR	38.5	-21.2	41.34	54	-12.66	-	-	-	-	113	141	V
6	* 17.732	33.05	PK-U	44.1	-17.4	59.75	-	-	74	-14.25	-	-	96	261	V
	* 17.731	17.07	ADR	44.1	-17.5	43.67	54	-10.33	-	-	-	-	96	261	V
1	1.723	41.11	PK-U	29.8	-31.7	39.21	-	-	-	-	68.2	-28.99	272	309	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.1.24. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.8 GHz BAND

1TX Antenna 4 MODE – 996 Tones, RU Index 67

BANDEDGE (CHANNEL 155 LOW EDGE)

HORIZONTAL RESULT

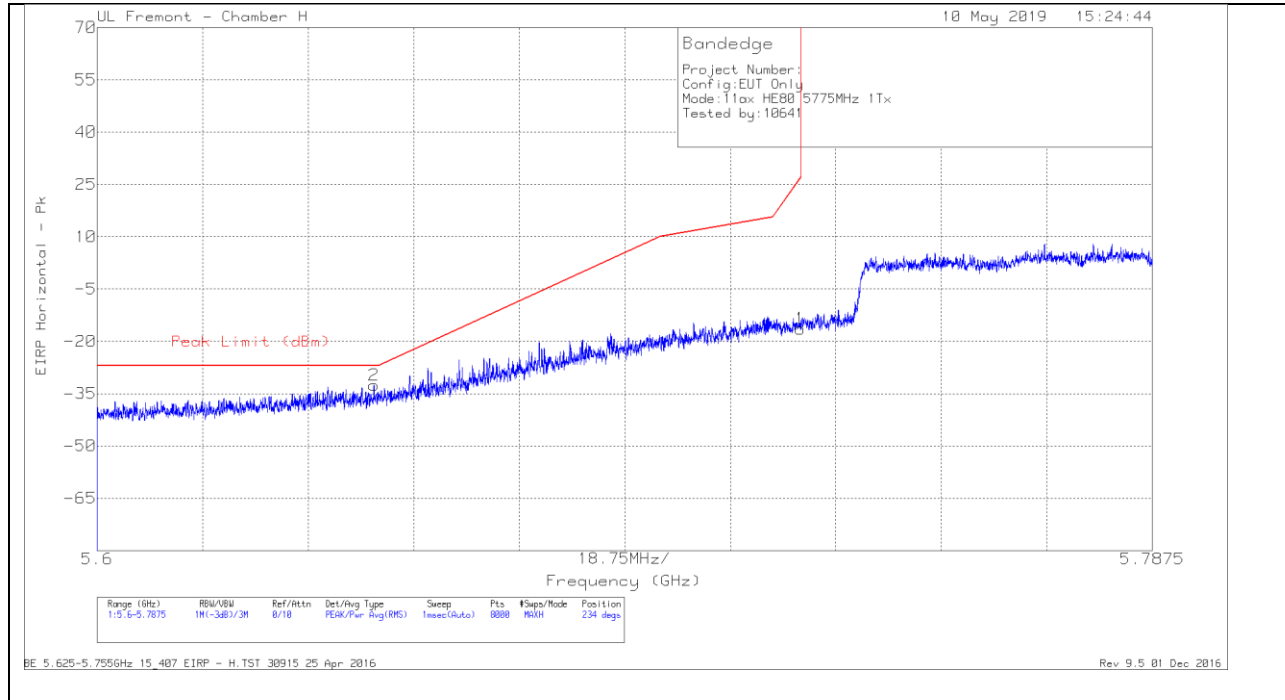

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649	-58.71	Pk	34.9	-20.6	11.8	-32.61	-27	-5.61	234	349	H
1	5.725	-42.58	Pk	35.1	-20.7	11.8	-16.38	26.96	-43.34	234	349	H

Pk - Peak detector