
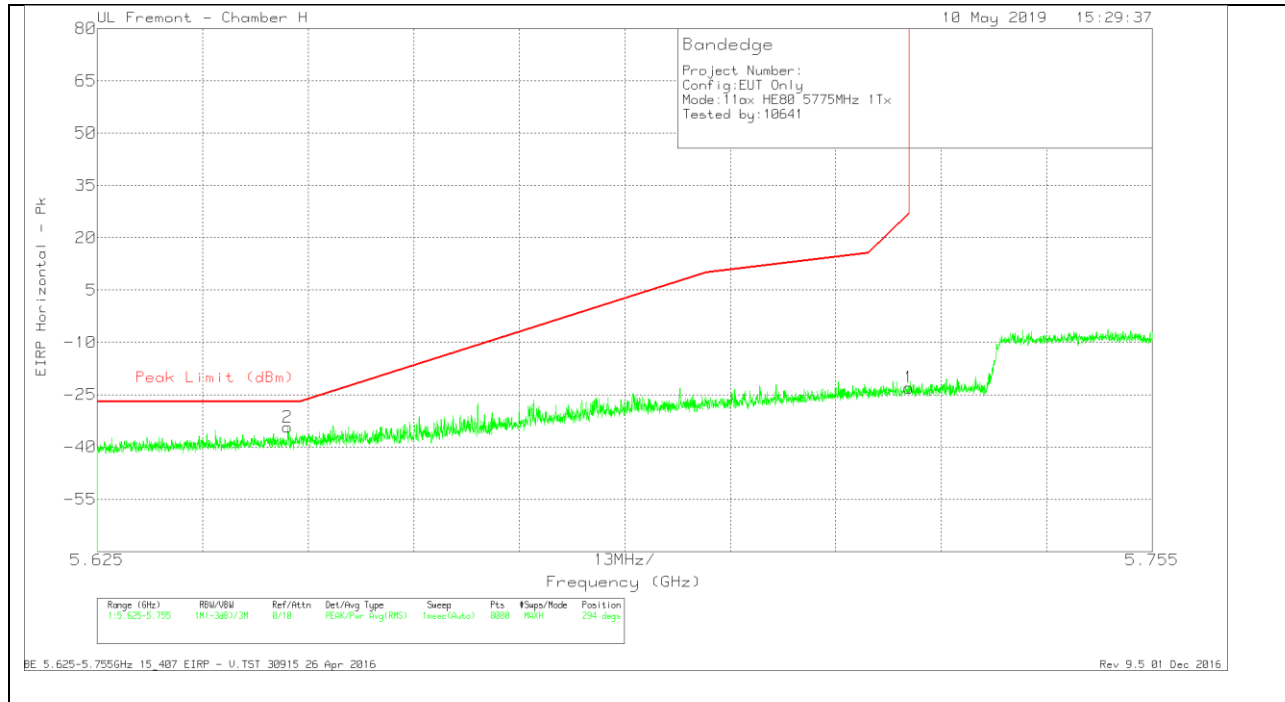


VERTICAL RESULT

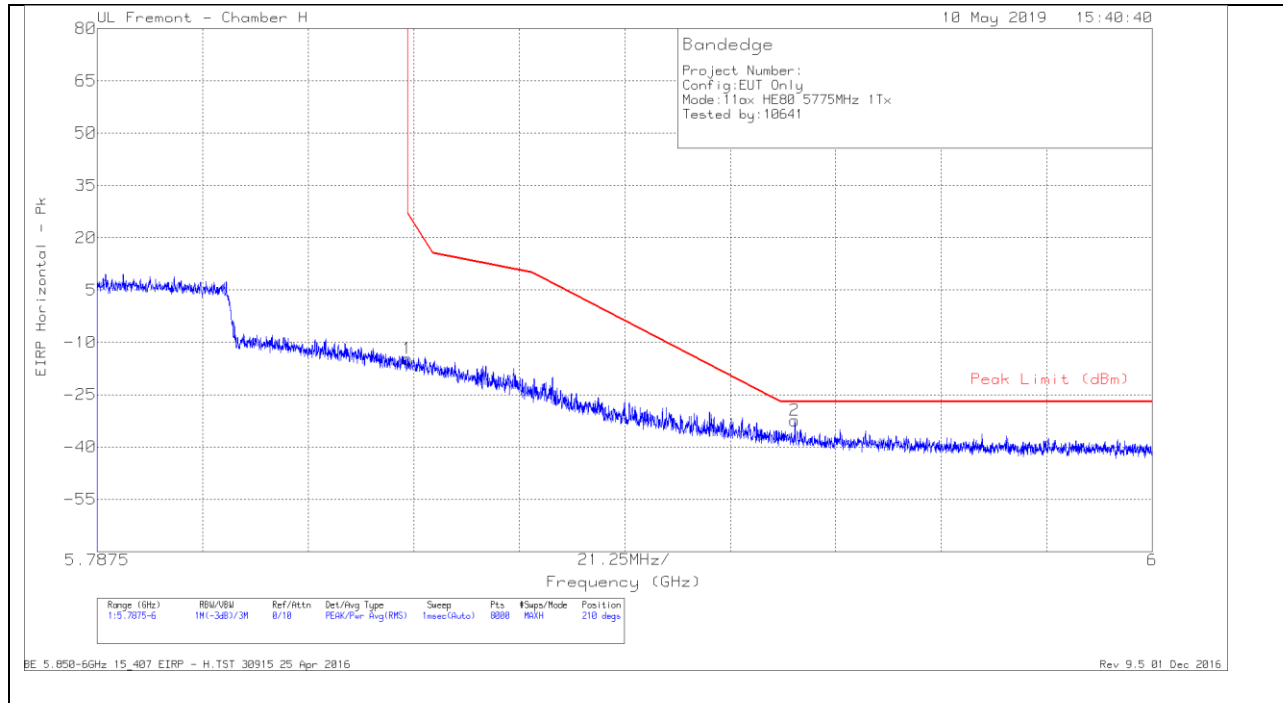

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648	-60.45	Pk	34.9	-20.6	11.8	-34.35	-27	-7.35	294	208	V
1	5.725	-49.21	Pk	35.1	-20.7	11.8	-23.01	27	-50.01	294	208	V


Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-41.58	Pk	35.5	-20.4	11.8	-14.68	26.98	-41.66	210	113	H
2	5.928	-59.68	Pk	35.6	-20.1	11.8	-32.38	-27	-5.38	210	113	H


Pk - Peak detector

VERTICAL RESULT

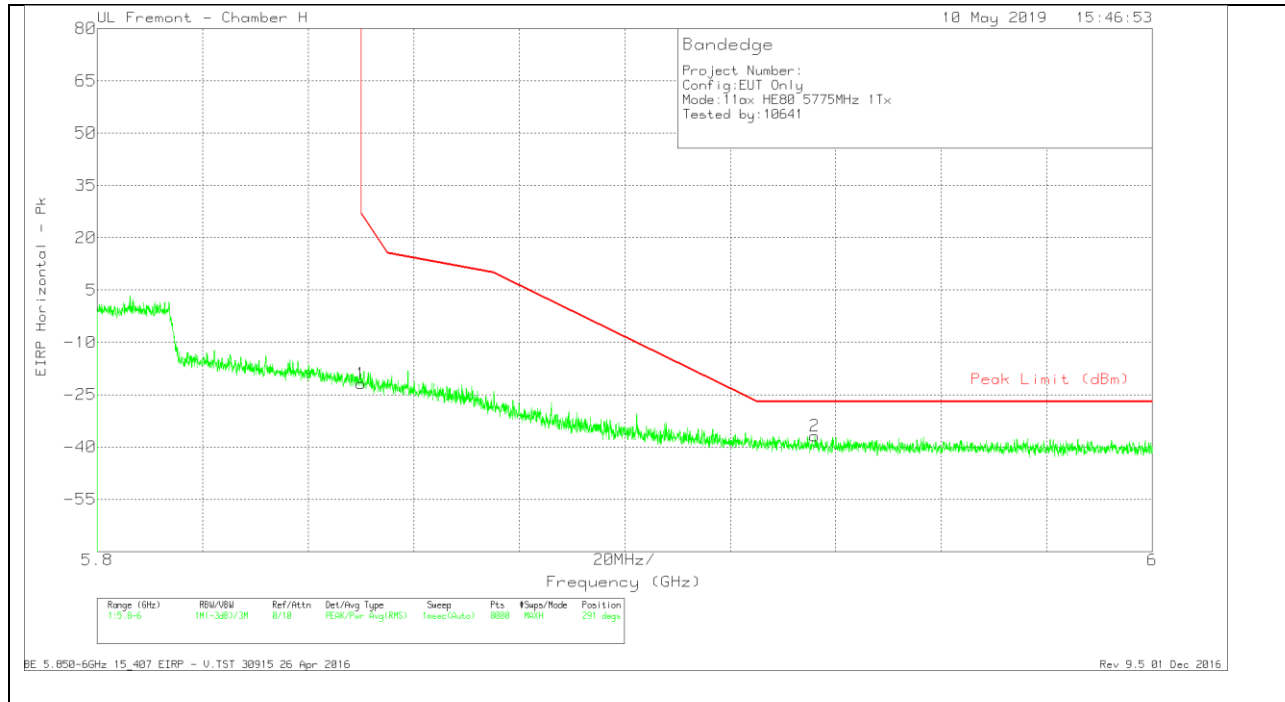

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.75	Pk	35.5	-20.4	11.8	-21.85	26.99	-48.84	291	106	V
2	5.936	-63.95	Pk	35.5	-20.2	11.8	-36.85	-27	-9.85	291	106	V


Pk - Peak detector

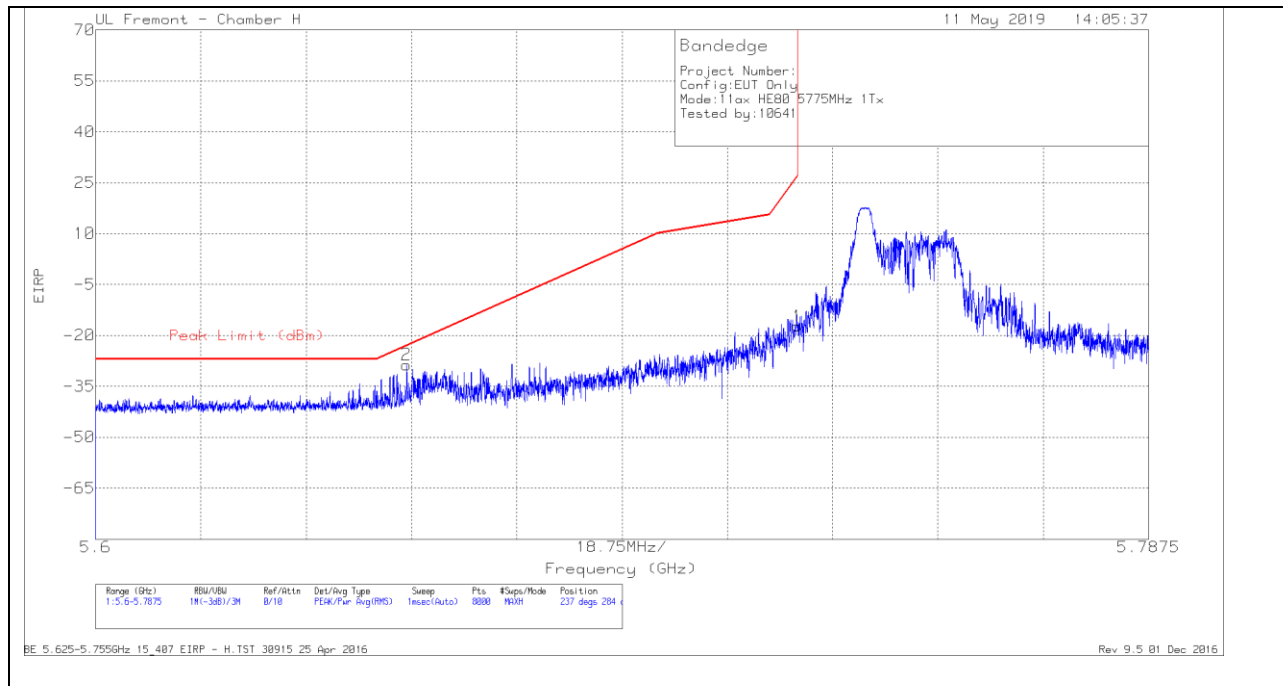1TX Antenna 4 MODE – 26 Tones, RU Index 0**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.655	-54.8	Pk	34.9	-20.5	11.8	-28.6	-23.01	-5.59	237	284	H
1	5.725	-43.5	Pk	35.1	-20.7	11.8	-17.3	26.96	-44.26	237	284	H


Pk - Peak detector

VERTICAL RESULT

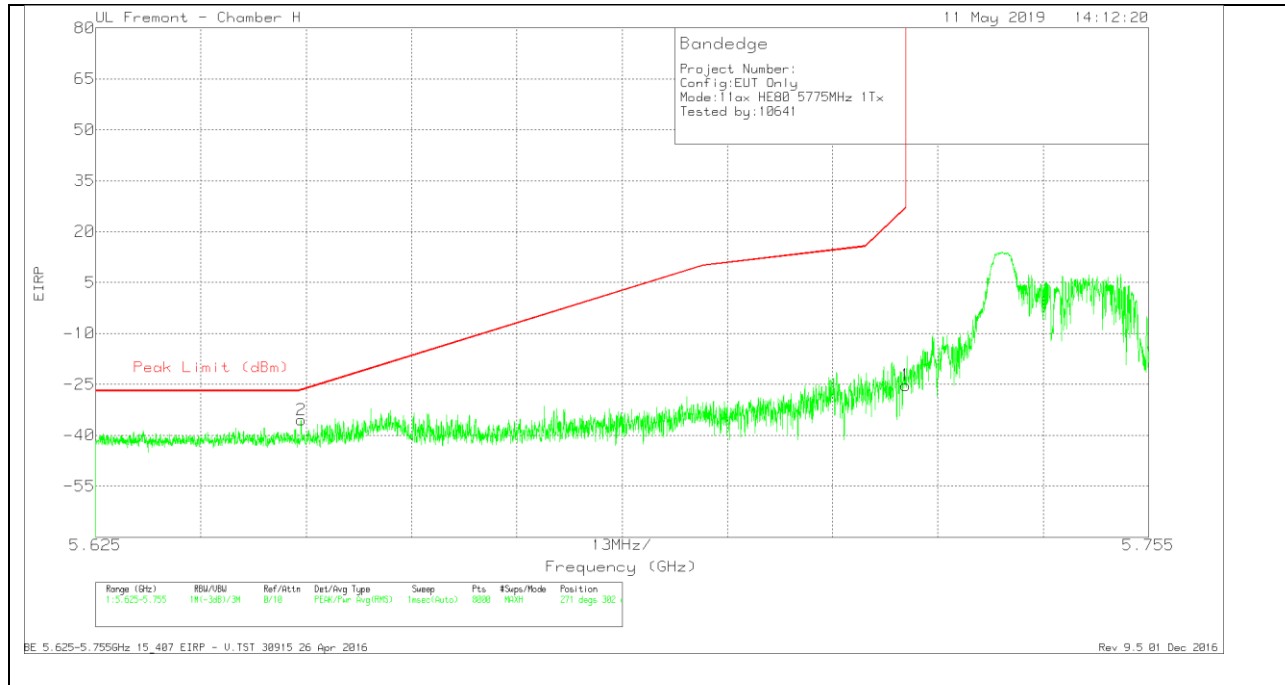

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65	-61.63	Pk	34.9	-20.6	11.8	-35.53	-26.73	-8.8	271	302	V
1	5.725	-51.43	Pk	35.1	-20.7	11.8	-25.23	27	-52.23	271	302	V


Pk - Peak detector

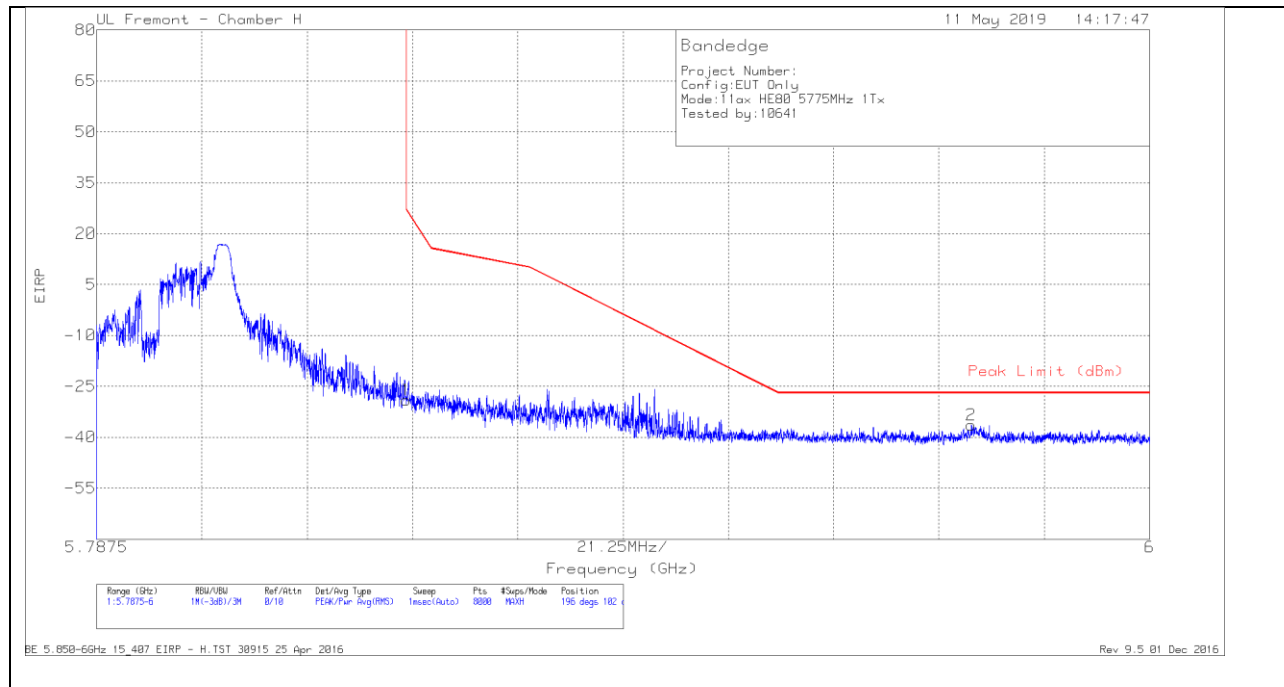1TX Antenna 4 MODE – 26 Tones, RU Index 36**BANDEDGE (CHANNEL 155 HIGH EDGE)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-55.93	Pk	35.5	-20.4	11.8	-29.03	26.98	-56.01	196	102	H
2	5.964	-63.74	Pk	35.6	-20.1	11.8	-36.44	-27	-9.44	196	102	H


Pk - Peak detector

VERTICAL RESULT

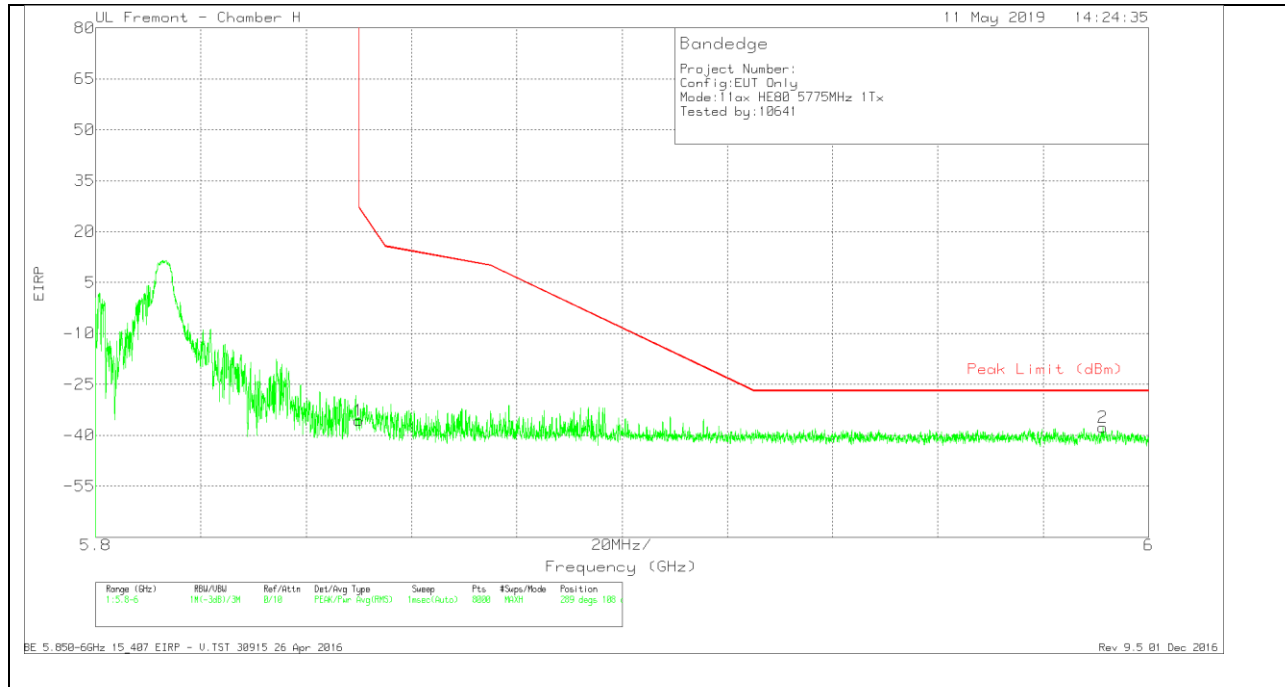

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-62.53	Pk	35.5	-20.4	11.8	-35.63	26.99	-62.62	289	108	V
2	5.991	-65.34	Pk	35.6	-19.8	11.8	-37.74	-27	-10.74	289	108	V


Pk - Peak detector

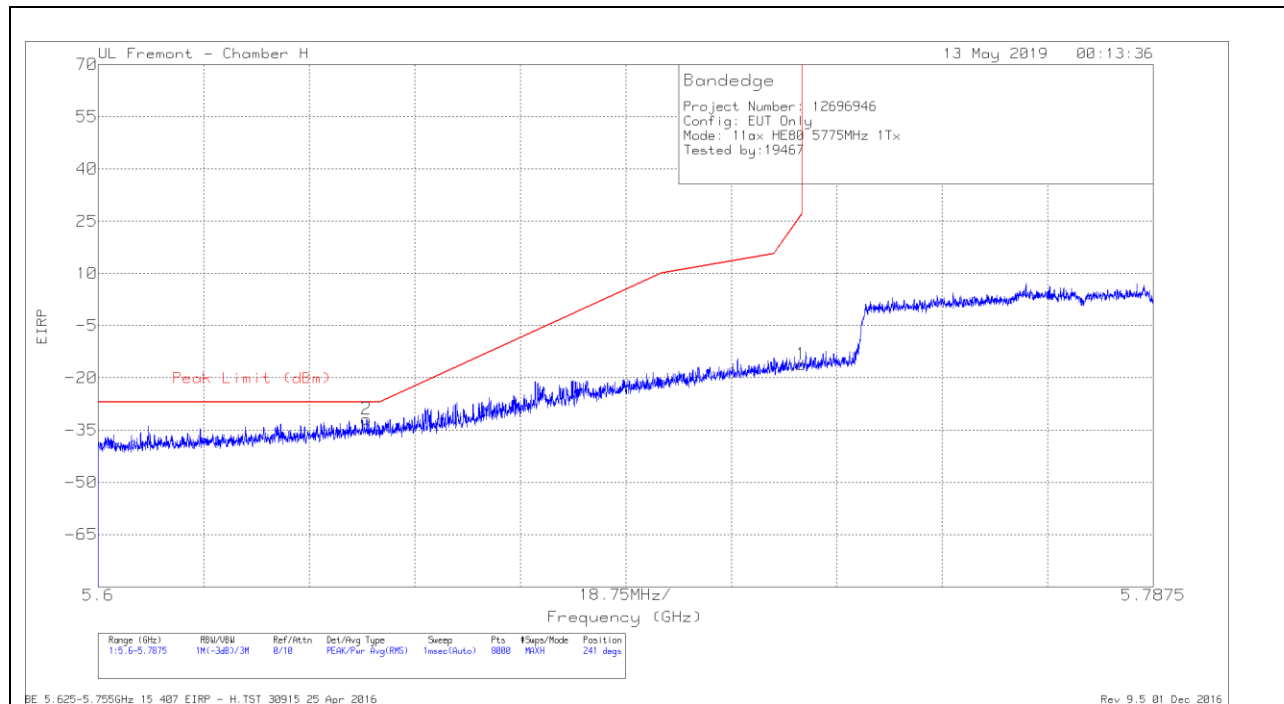1TX Antenna 5 MODE – 996 Tones, RU Index 67**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648	-57.92	Pk	34.9	-20.6	11.8	-31.82	-27	-4.82	241	206	H
1	5.725	-42.28	Pk	35.1	-20.7	11.8	-16.08	26.96	-43.04	241	206	H

Pk - Peak detector

VERTICAL RESULT

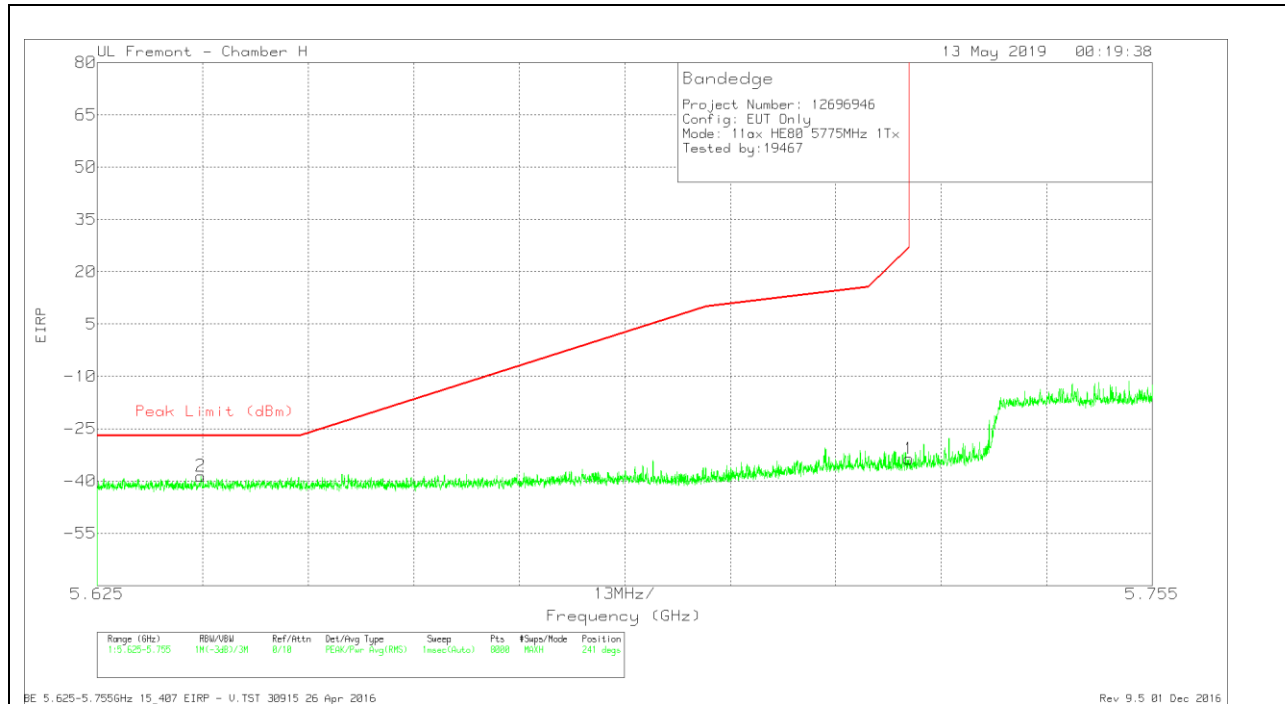


Pk - Peak detector

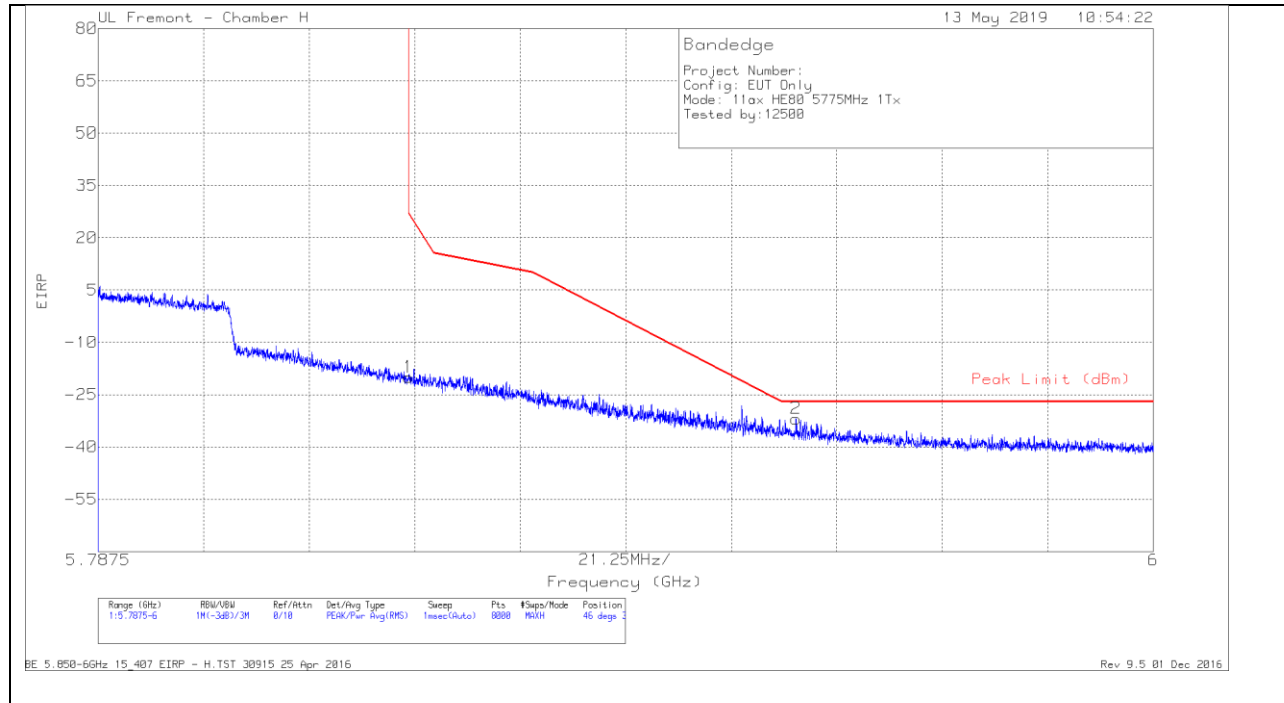BANDEDGE (CHANNEL 155 HIGH EDGE)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-46.87	Pk	35.5	-20.4	11.8	-19.97	26.98	-46.95	46	374	H
2	5.928	-59.18	Pk	35.6	-20.1	11.8	-31.88	-27	-4.88	46	374	H


Pk - Peak detector

VERTICAL RESULT

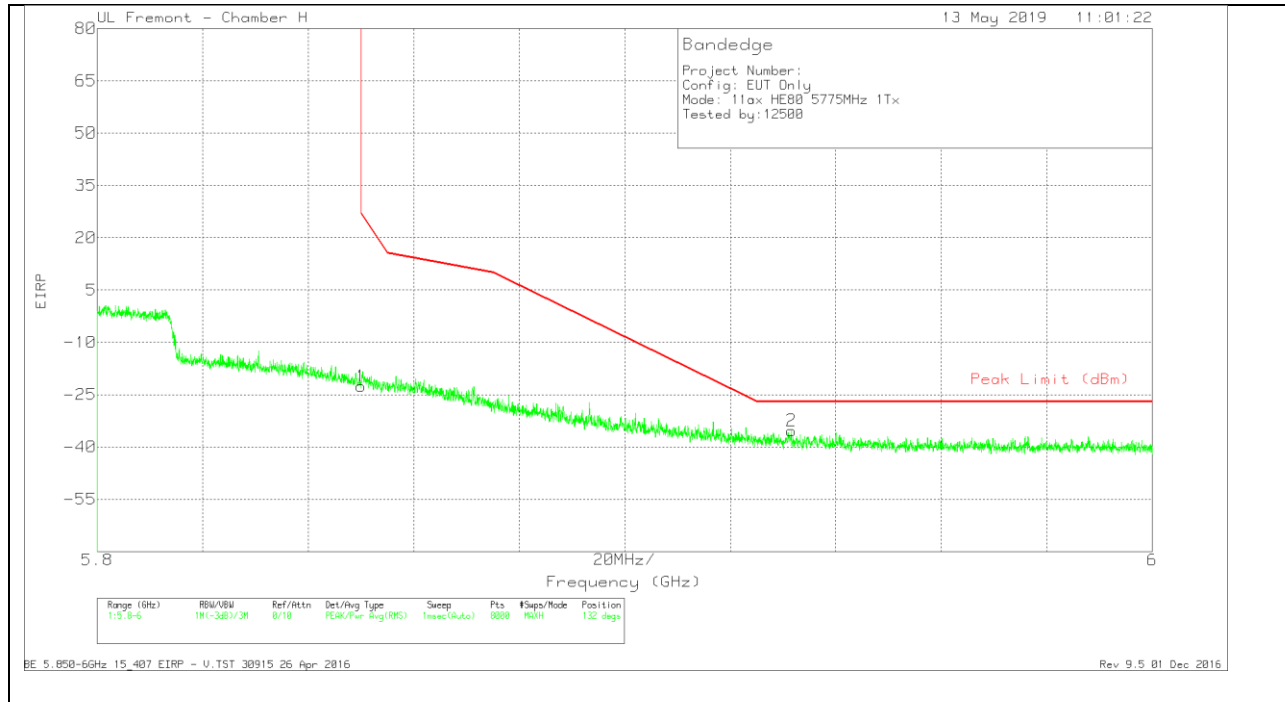


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-49.5	Pk	35.5	-20.4	11.8	-22.6	26.99	-49.59	132	165	V
2	5.932	-62.56	Pk	35.6	-20.2	11.8	-35.36	-27	-8.36	132	165	V

Pk - Peak detector

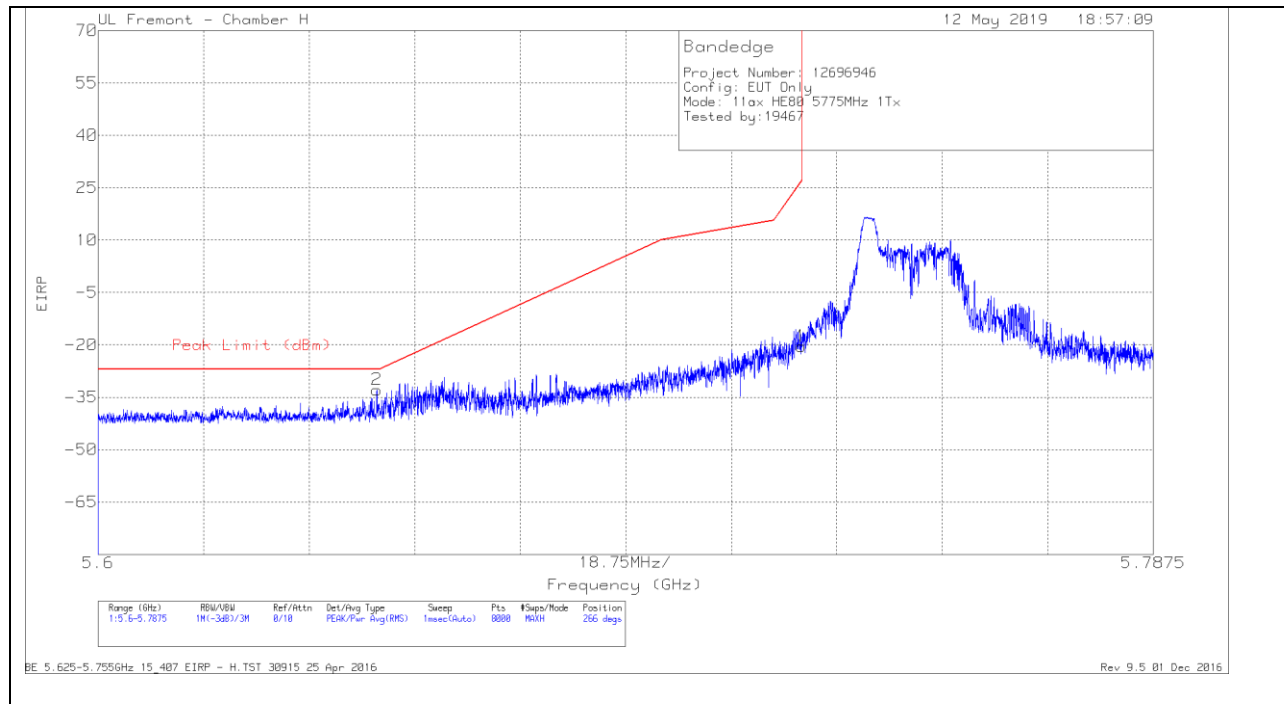1TX Antenna 5 MODE – 26 Tones, RU Index 0**BANDEDGE (CHANNEL 155 LOW EDGE)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65	-58.94	Pk	34.9	-20.6	11.8	-32.84	-27	-5.84	266	238	H
1	5.725	-46.64	Pk	35.1	-20.7	11.8	-20.44	26.96	-47.4	266	238	H

VERTICAL RESULT

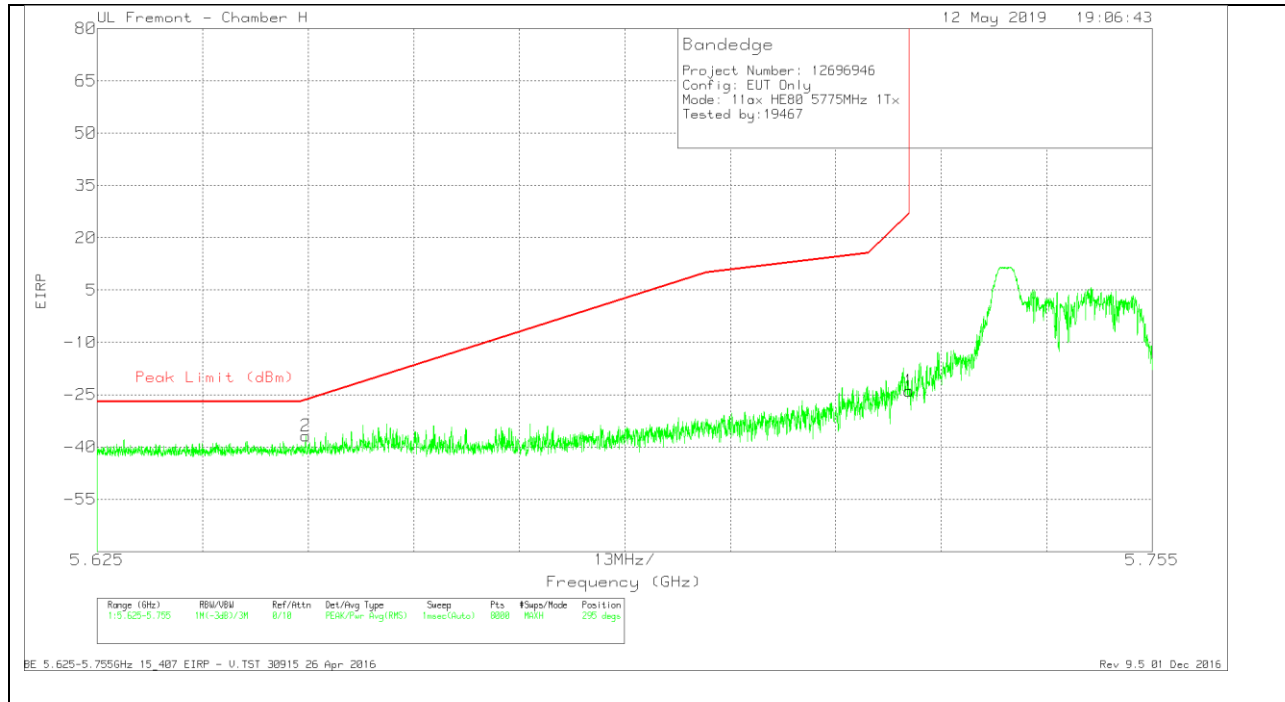

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-50.1	Pk	35.1	-20.7	11.8	-23.9	27	-50.9	295	122	V
2	5.651	-62.93	Pk	34.9	-20.6	11.8	-36.83	-26.5	-10.33	295	122	V


Pk - Peak detector

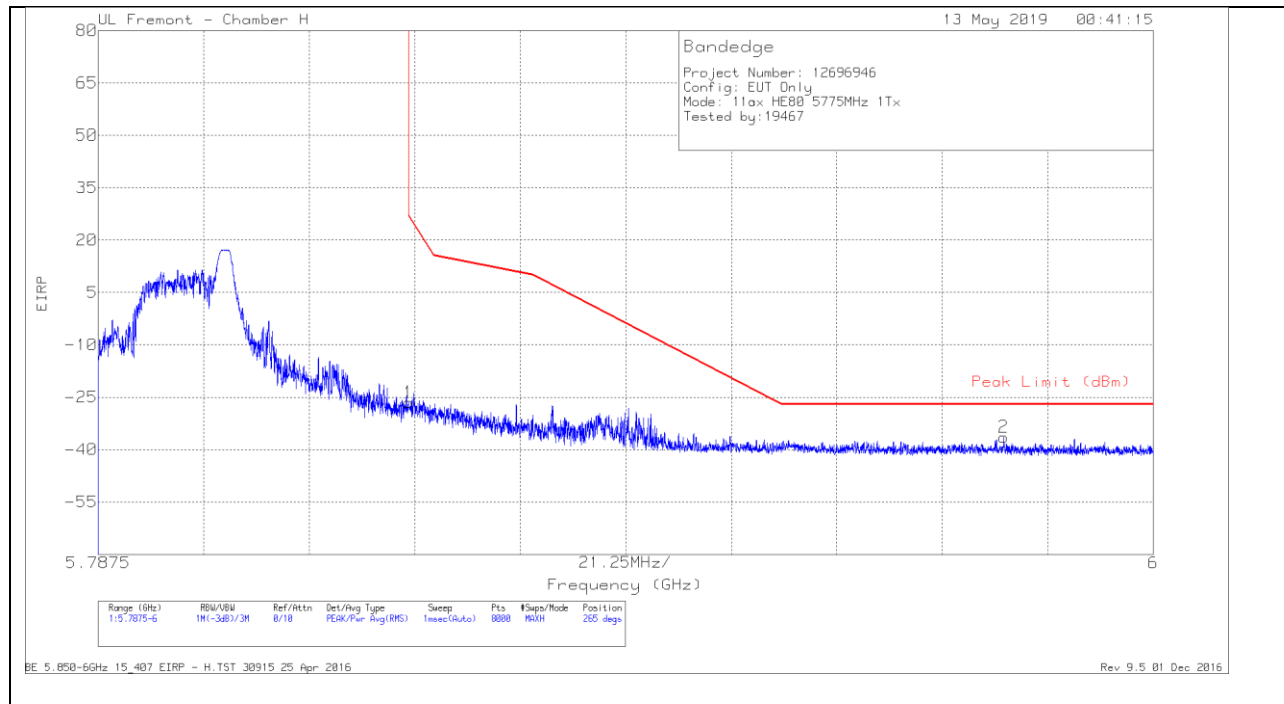1TX Antenna 5 MODE – 26 Tones, RU Index 36**BANDEDGE (CHANNEL 155 HIGH EDGE)****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-53.43	Pk	35.5	-20.4	11.8	-26.53	26.98	-53.51	265	278	H
2	5.97	-63.72	Pk	35.5	-20	11.8	-36.42	-27	-9.42	265	278	H


Pk - Peak detector

VERTICAL RESULT

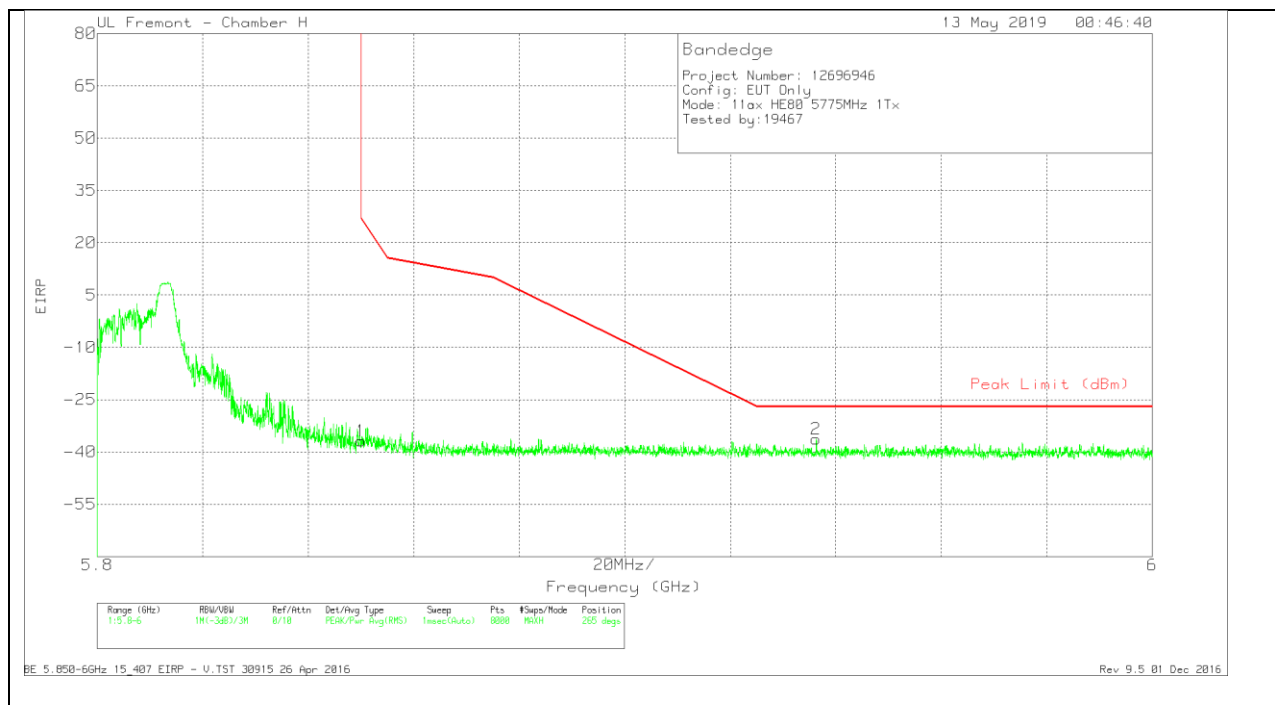

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.75	Pk	35.5	-20.4	11.8	-36.85	26.99	-63.84	265	278	V
2	5.936	-63.51	Pk	35.6	-20.2	11.8	-36.31	-27	-9.31	265	278	V


Pk - Peak detector

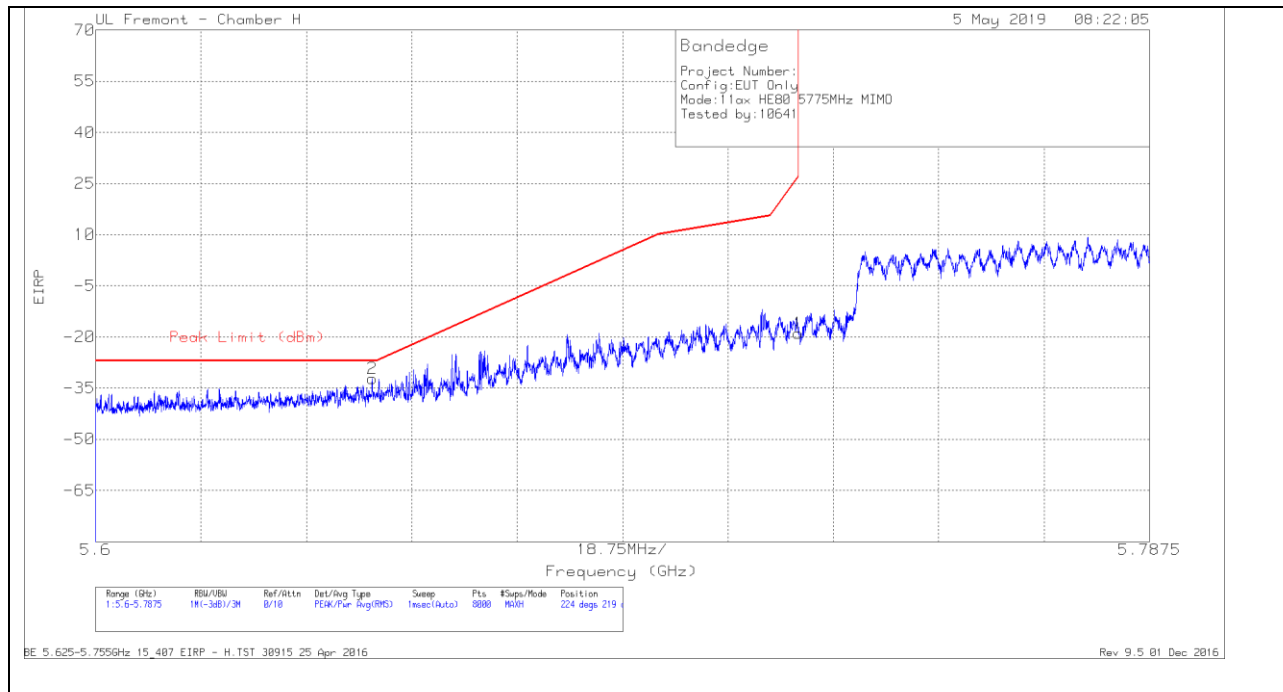BANDEDGE (CHANNEL 155 LOW EDGE)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649	-58.33	Pk	34.9	-20.6	11.8	-32.23	-27	-5.23	224	219	H
1	5.725	-45.07	Pk	35.1	-20.7	11.8	-18.87	26.96	-45.83	224	219	H


Pk - Peak detector

VERTICAL RESULT

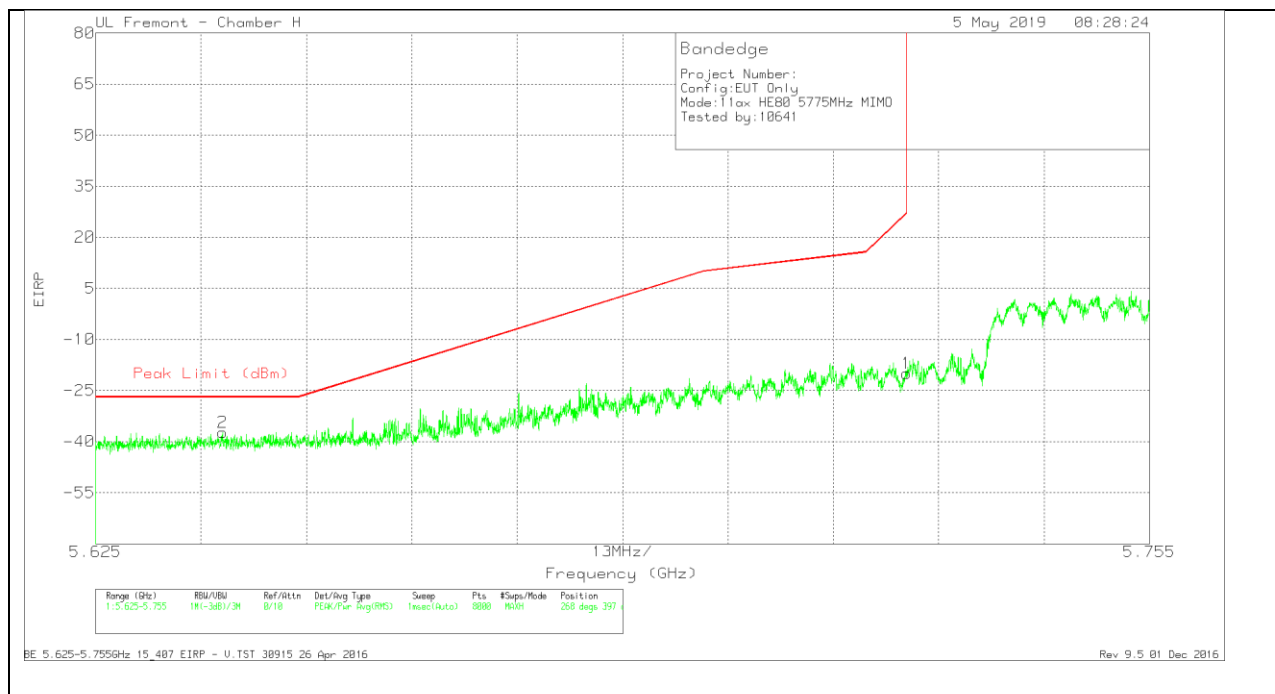

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.641	-63.53	Pk	35	-20.6	11.8	-37.33	-27	-10.33	268	397	V
1	5.725	-46.18	Pk	35.1	-20.7	11.8	-19.98	27	-46.98	268	397	V


Pk - Peak detector

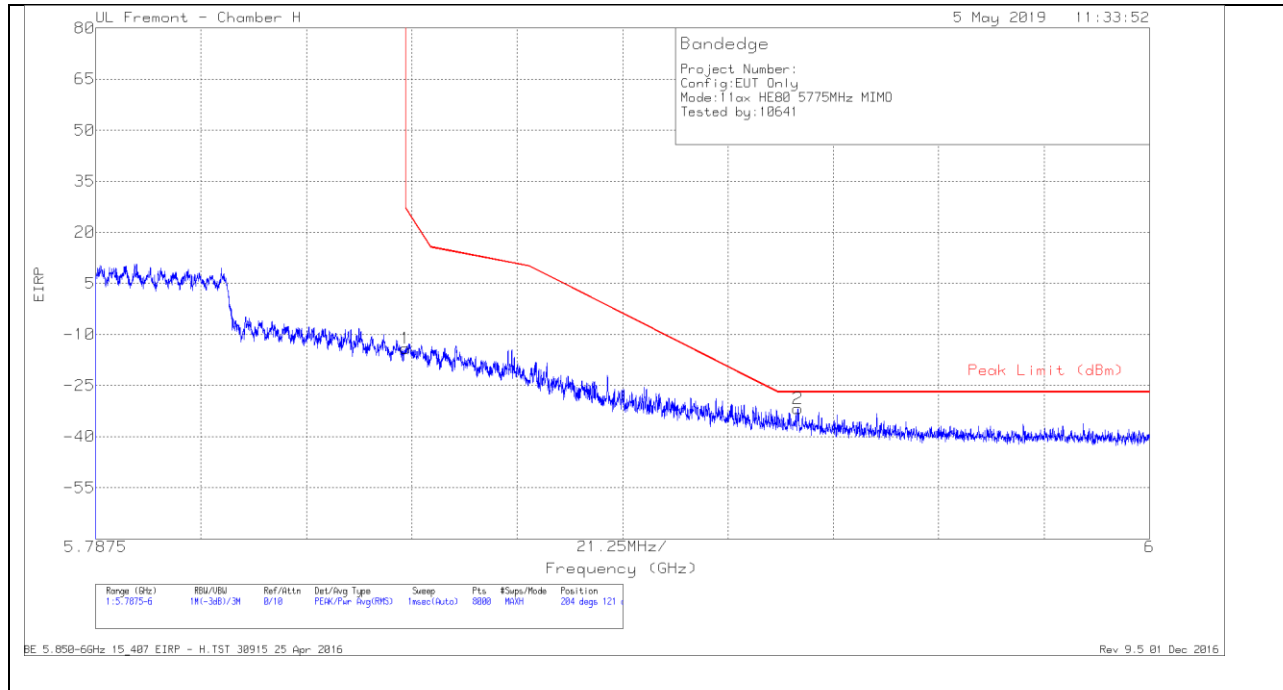BANDEDGE (CHANNEL 155 HIGH EDGE)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-41	Pk	35.5	-20.4	11.8	-14.1	26.98	-41.08	204	121	H
2	5.929	-59.15	Pk	35.6	-20.1	11.8	-31.85	-27	-4.85	204	121	H



Pk - Peak detector

VERTICAL RESULT

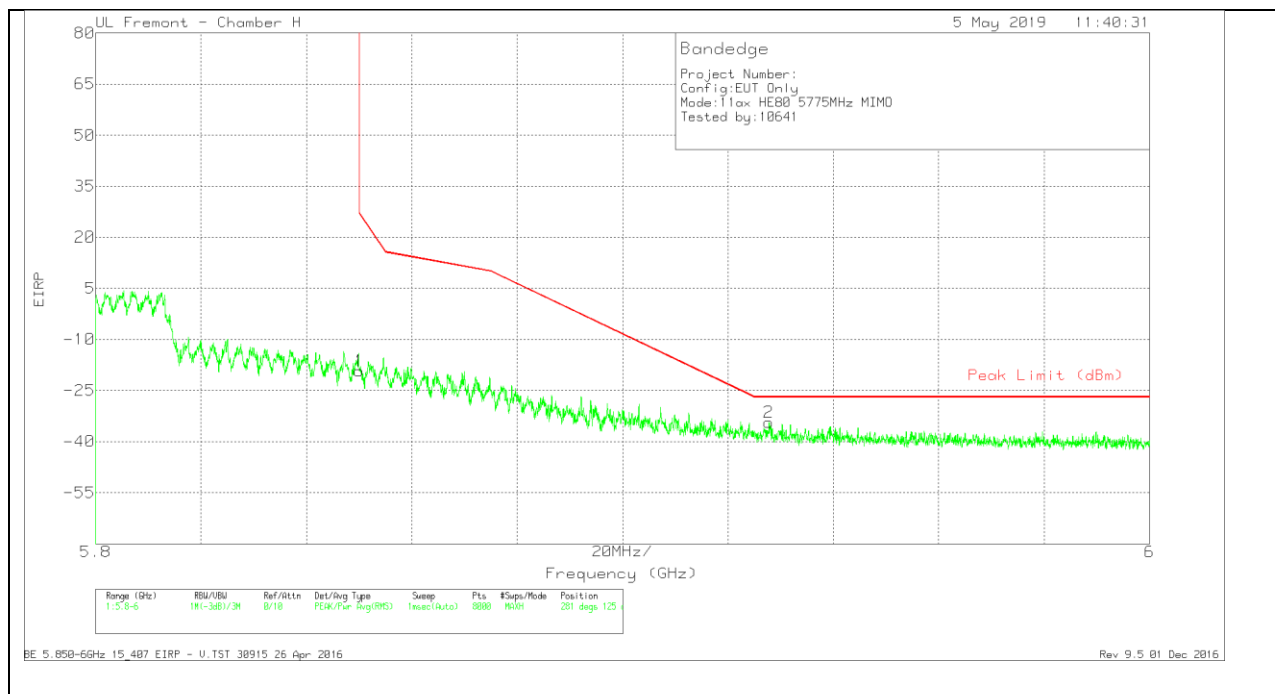

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-46.12	Pk	35.5	-20.4	11.8	-19.22	26.99	-46.21	281	125	V
2	5.928	-61.63	Pk	35.6	-20.1	11.8	-34.33	-27	-7.33	281	125	V

Pk - Peak detector

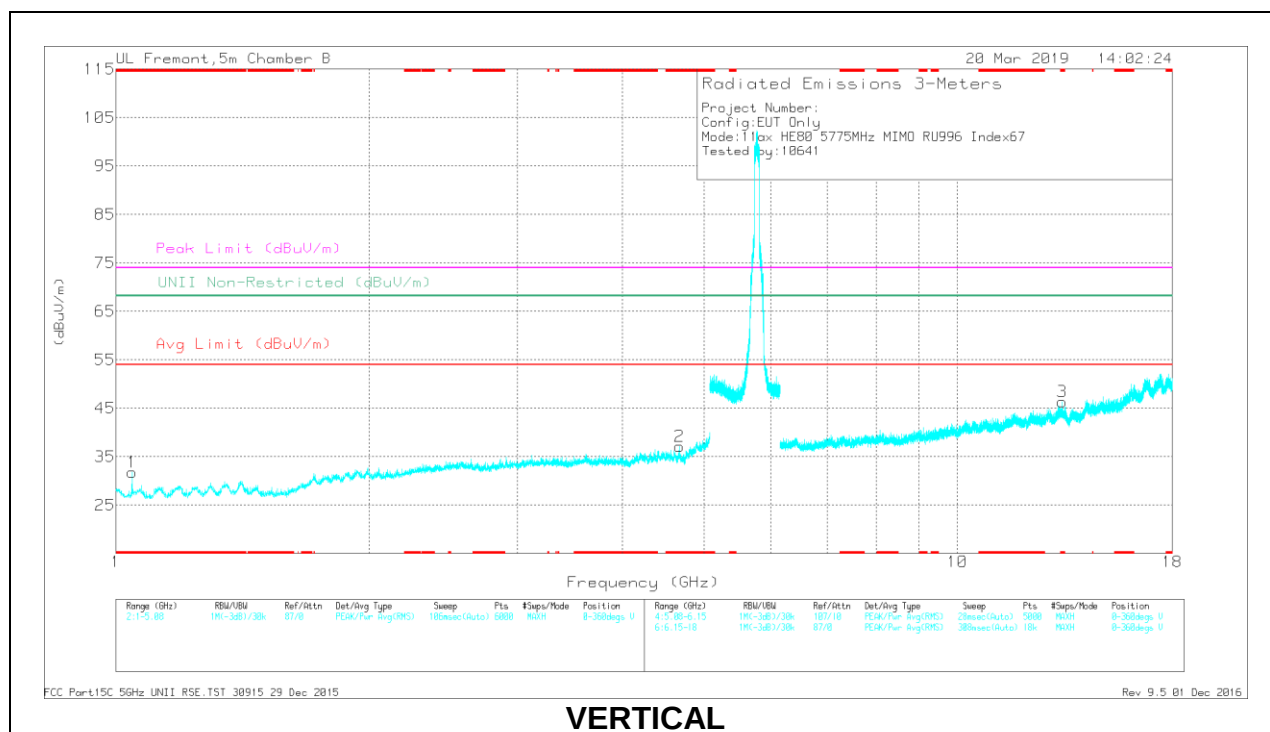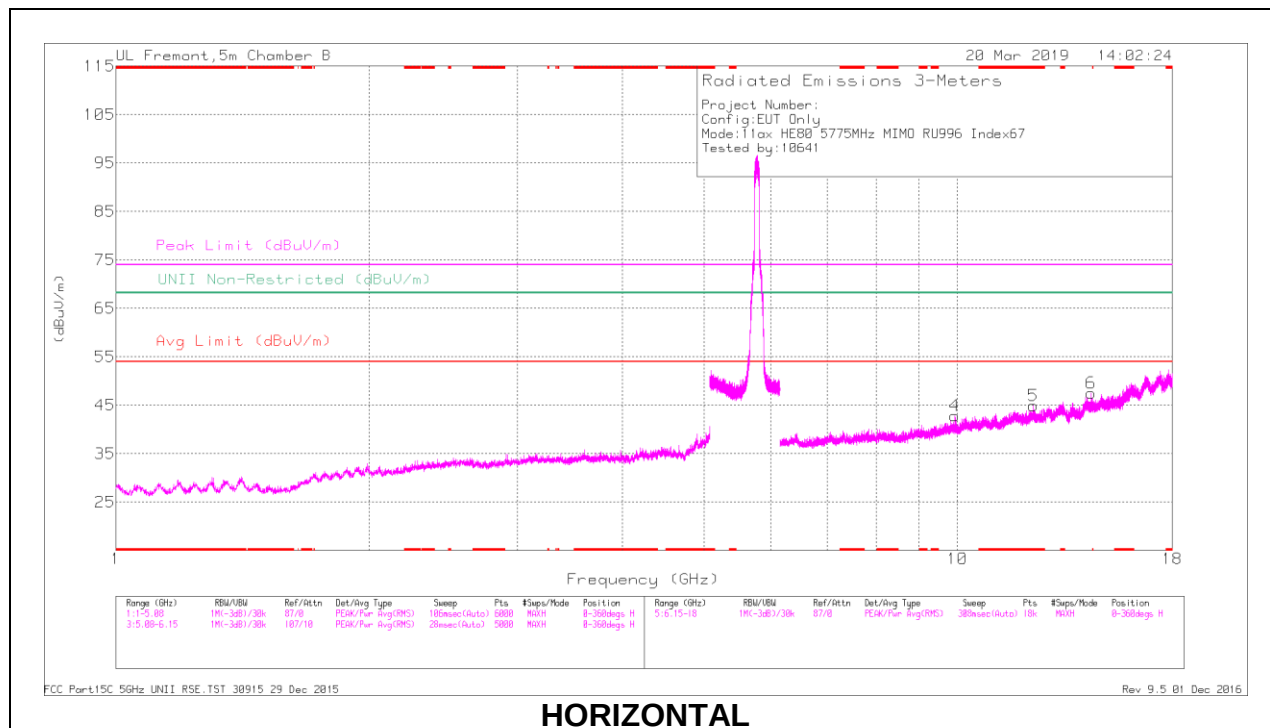HARMONICS AND SPURIOUS EMISSIONS**MID CHANNEL RESULTS**


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	AmplChlIFtrr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.044	41.16	PK-U	27.5	-33.6	35.06	-	-	74	-38.94	-	-	330	128	V
	* 1.047	29.64	ADR	27.5	-33.6	23.54	54	-30.46	-	-	-	-	330	128	V
2	* 4.672	37.98	PK-U	34.1	-28.3	43.78	-	-	74	-30.22	-	-	300	170	V
	* 4.672	26.05	ADR	34.1	-28.3	31.85	54	-22.15	-	-	-	-	300	170	V
5	* 12.307	32.37	PK-U	39.1	-20.2	51.27	-	-	74	-22.73	-	-	256	224	H
	* 12.304	19.8	ADR	39.1	-20.2	38.7	54	-15.3	-	-	-	-	256	224	H
3	* 13.319	33.06	PK-U	40.7	-20.8	52.96	-	-	74	-21.04	-	-	226	196	V
	* 13.32	19.76	ADR	40.7	-20.8	39.66	54	-14.34	-	-	-	-	226	196	V
4	9.927	33.52	PK-U	37.3	-22	48.82	-	-	-	-	68.2	-19.38	269	193	H
6	14.403	33.81	PK-U	40.1	-20	53.91	-	-	-	-	68.2	-14.29	262	243	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

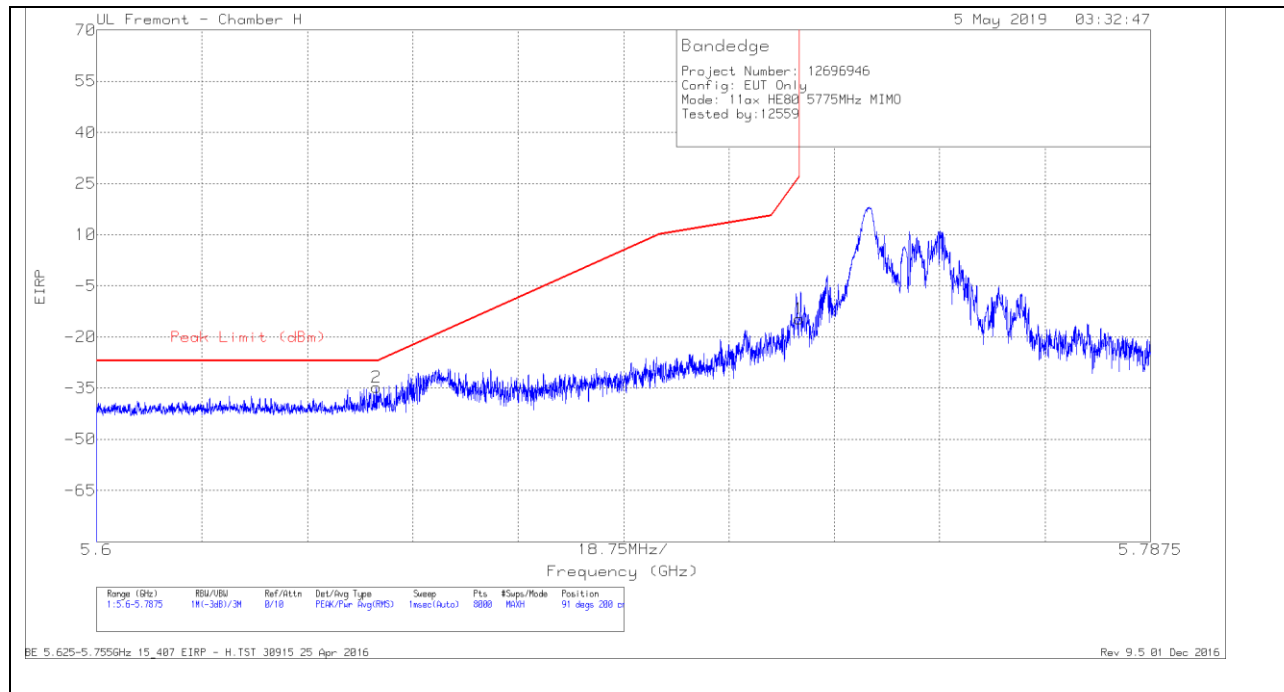BANDEDGE (CHANNEL 155 LOW EDGE)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65	-60.85	Pk	34.9	-20.6	11.8	-34.75	-27	-7.75	91	200	H
1	5.725	-40.92	Pk	35.1	-20.7	11.8	-14.72	26.96	-41.68	91	200	H


Pk - Peak detector

VERTICAL RESULT

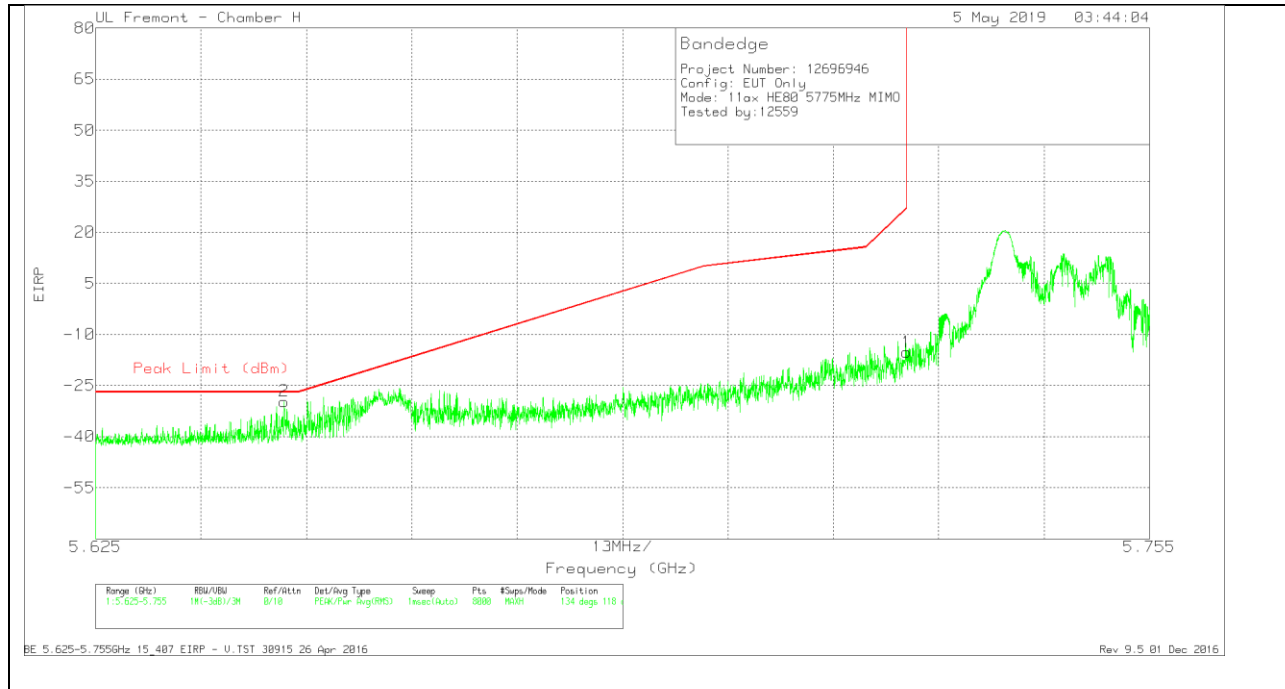

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648	-55.75	Pk	34.9	-20.6	11.8	-29.65	-27	-2.65	134	118	V
1	5.725	-41.37	Pk	35.1	-20.7	11.8	-15.17	27	-42.17	134	118	V


Pk - Peak detector

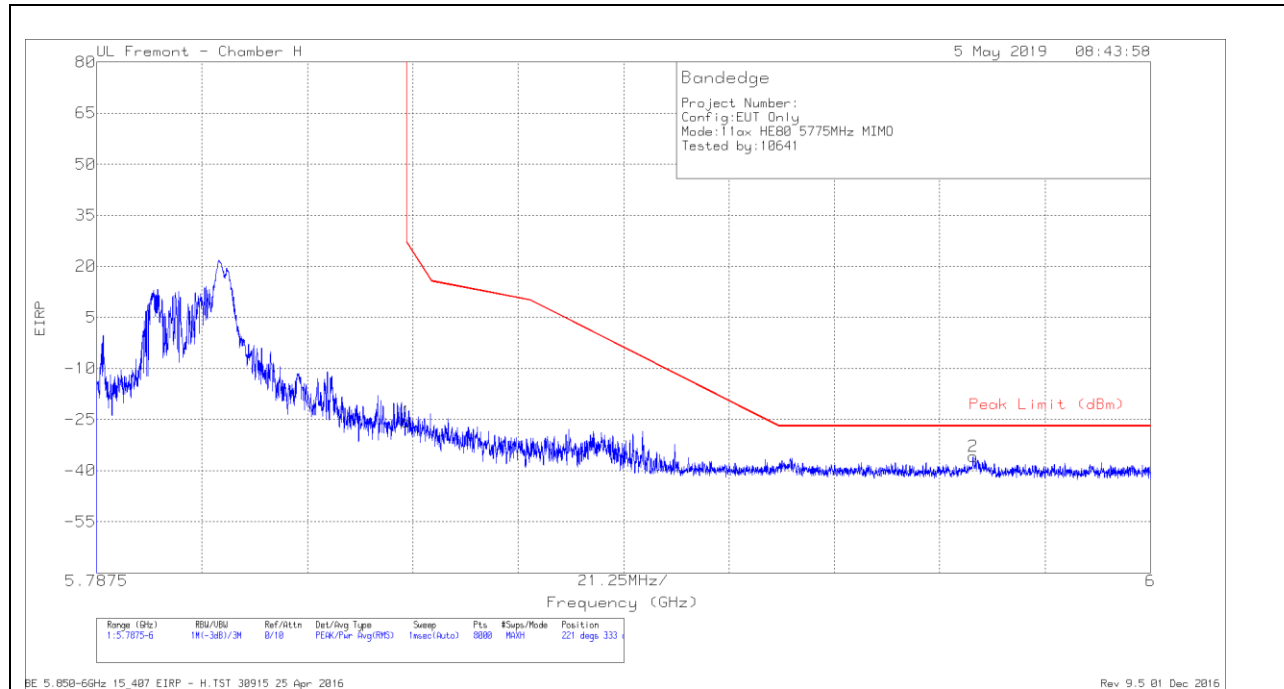BANDEDGE (CHANNEL 155 HIGH EDGE)**HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.62	Pk	35.5	-20.4	11.8	-25.72	26.98	-52.7	221	333	H
2	5.964	-63.13	Pk	35.6	-20.1	11.8	-35.83	-27	-8.83	221	333	H



Pk - Peak detector

VERTICAL RESULT

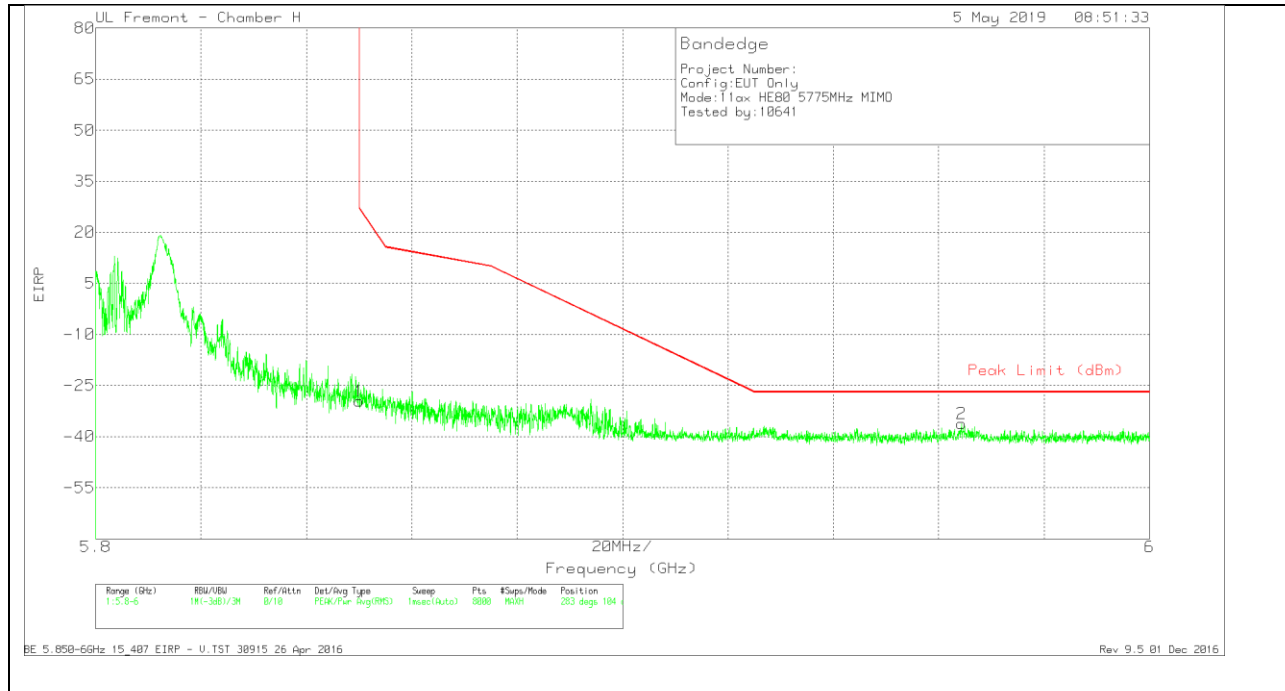

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-56.47	Pk	35.5	-20.4	11.8	-29.57	26.99	-56.56	283	104	V
2	5.964	-63.51	Pk	35.6	-20.1	11.8	-36.21	-27	-9.21	283	104	V

Pk - Peak detector

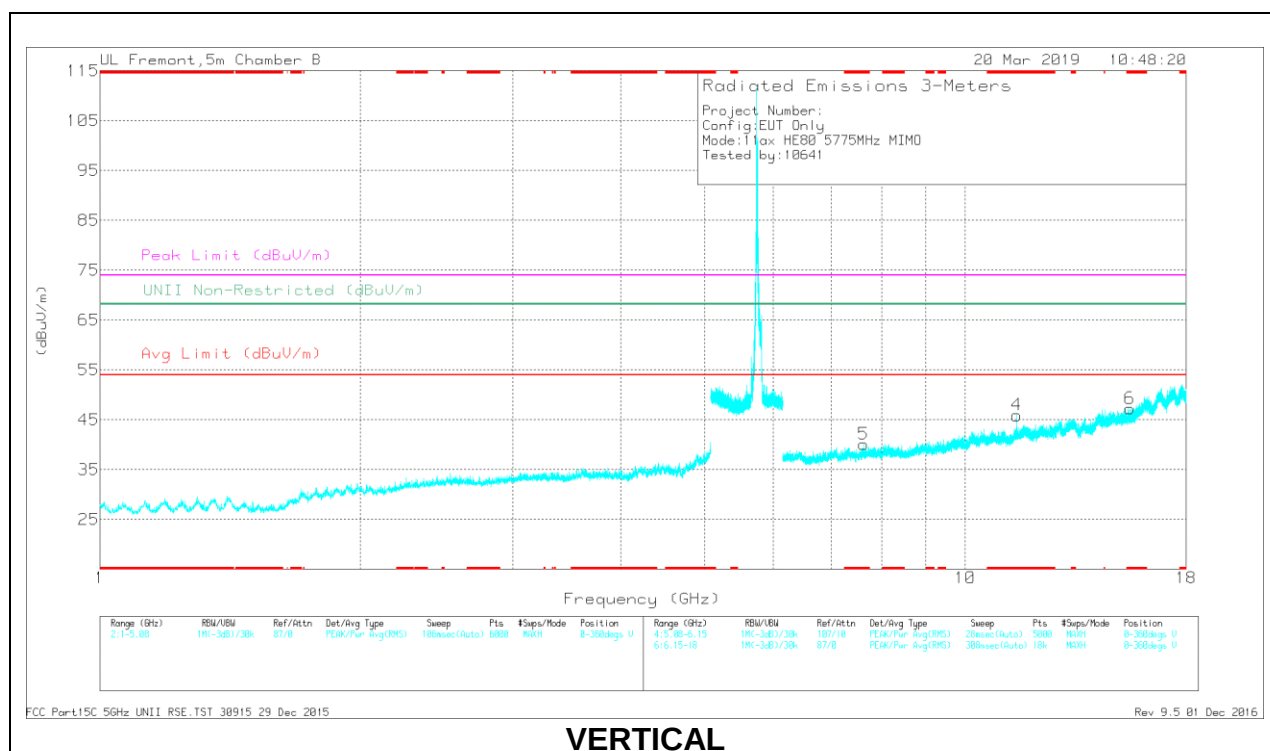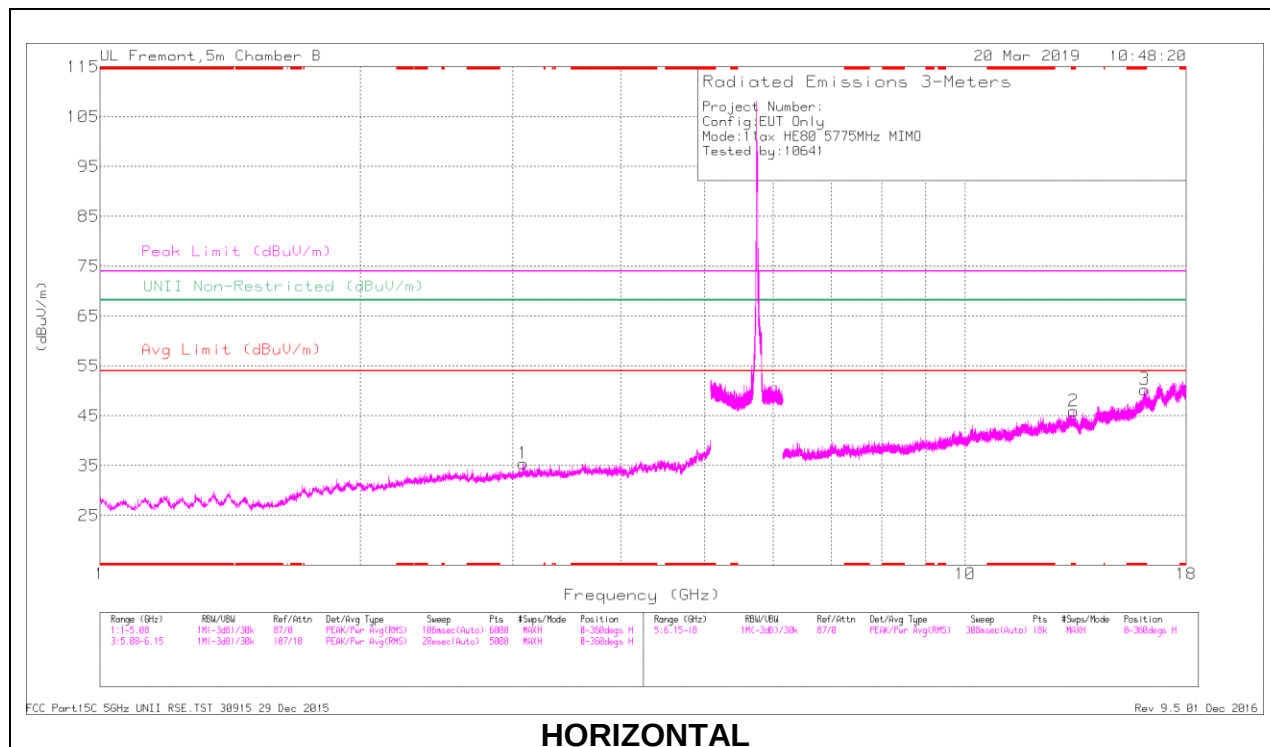2TX Antenna 4 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 36**HARMONICS AND SPURIOUS EMISSIONS****MID CHANNEL RESULTS**

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 13.335	-893.01	PK-U	40.6	-20.9	-873.31	-	-	74	-947.31	-	-	256	212	H
	* 13.338	19.71	ADR	40.6	-20.9	39.41	54	-14.59	-	-	-	-	256	212	H
3	* 16.107	32.9	PK-U	43	-18.1	57.8	-	-	74	-16.2	-	-	321	198	H
	* 16.107	18.26	ADR	43	-18.1	43.16	54	-10.84	-	-	-	-	321	198	H
4	* 11.475	33.52	PK-U	38.4	-21	50.92	-	-	74	-23.08	-	-	345	205	V
	* 11.473	20.52	ADR	38.4	-21	37.92	54	-16.08	-	-	-	-	345	205	V
5	* 7.627	35.65	PK-U	36.4	-25.1	46.95	-	-	74	-27.05	-	-	242	202	V
	* 7.627	23.42	ADR	36.4	-25.1	34.72	54	-19.28	-	-	-	-	242	202	V
6	* 15.506	32.54	PK-U	40.6	-18.5	54.64	-	-	74	-19.36	-	-	315	196	V
	* 15.505	18.27	ADR	40.6	-18.5	40.37	54	-13.63	-	-	-	-	315	196	V
1	3.086	39.29	PK-U	33.2	-30.6	41.89	-	-	-	-	68.2	-26.31	234	156	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2. WORST CASE BELOW 1 GHz

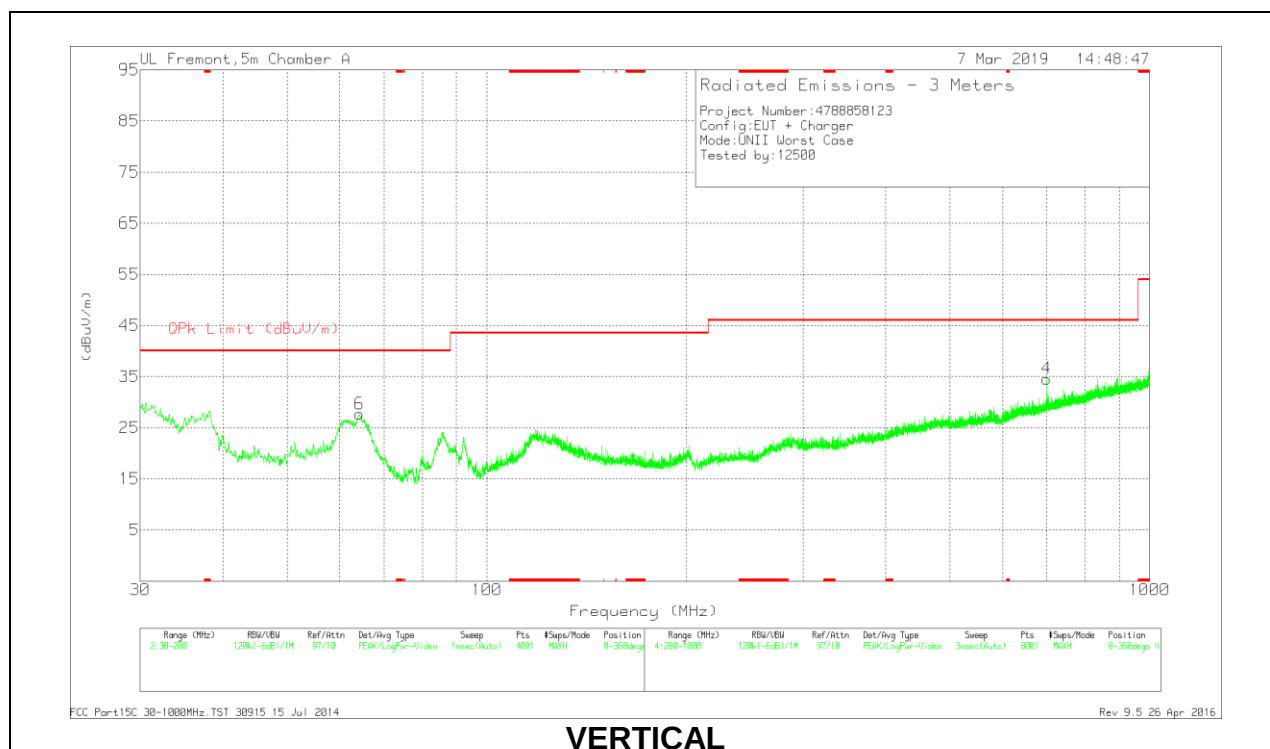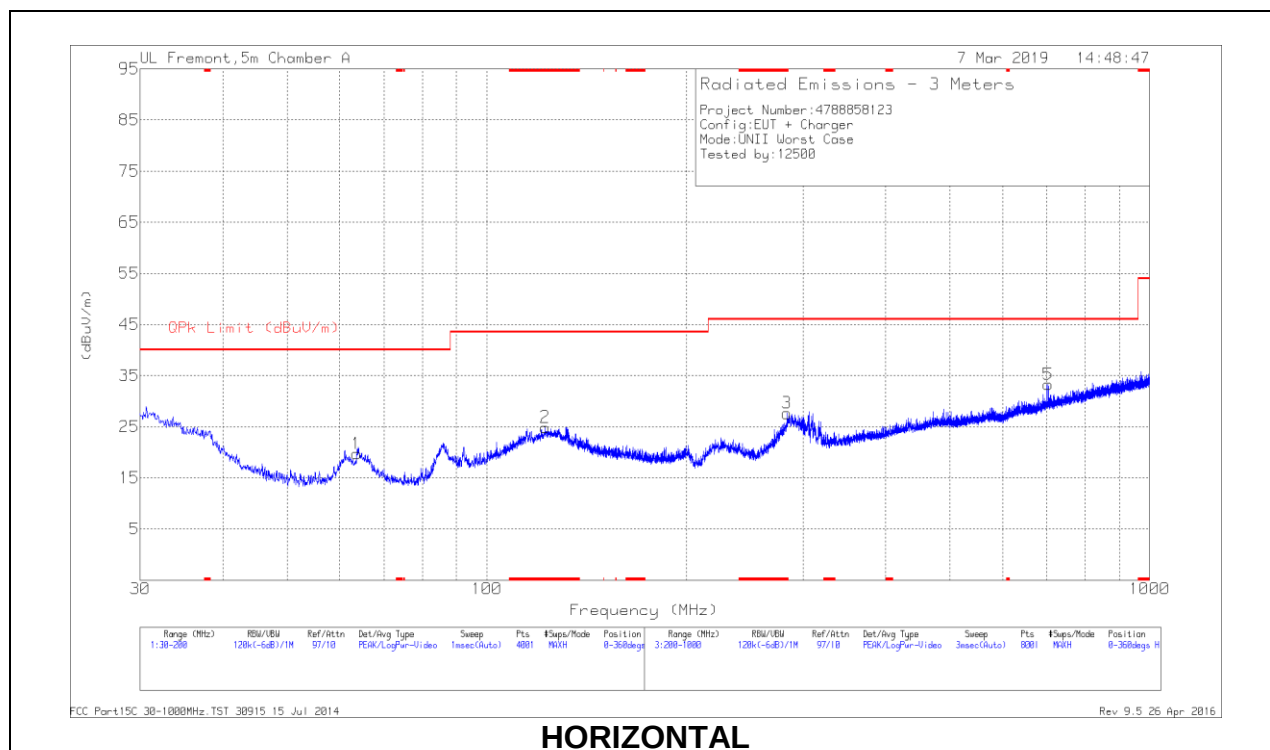



Below 1GHz DATA

Frequency (MHz)	Meter Reading (dBuV)	Det	AF PRE0181574 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 122.7824	26.1	Qp	19.8	-26	19.9	43.52	-23.62	14	298	H
* 283.7997	27.49	Qp	19.2	-24.4	22.29	46.02	-23.73	143	100	H
63.6782	28.91	Qp	13.7	-26.8	15.81	40	-24.19	81	233	H
64.1849	37.02	Qp	13.7	-26.8	23.92	40	-16.08	182	119	V
699.397	22.43	Qp	26.1	-23.9	24.63	46.02	-21.39	31	356	V
703.0741	22.42	Qp	26.1	-24	24.52	46.02	-21.5	316	308	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Qp - Quasi-Peak detector



1.3. WORST CASE 18-26 GHz

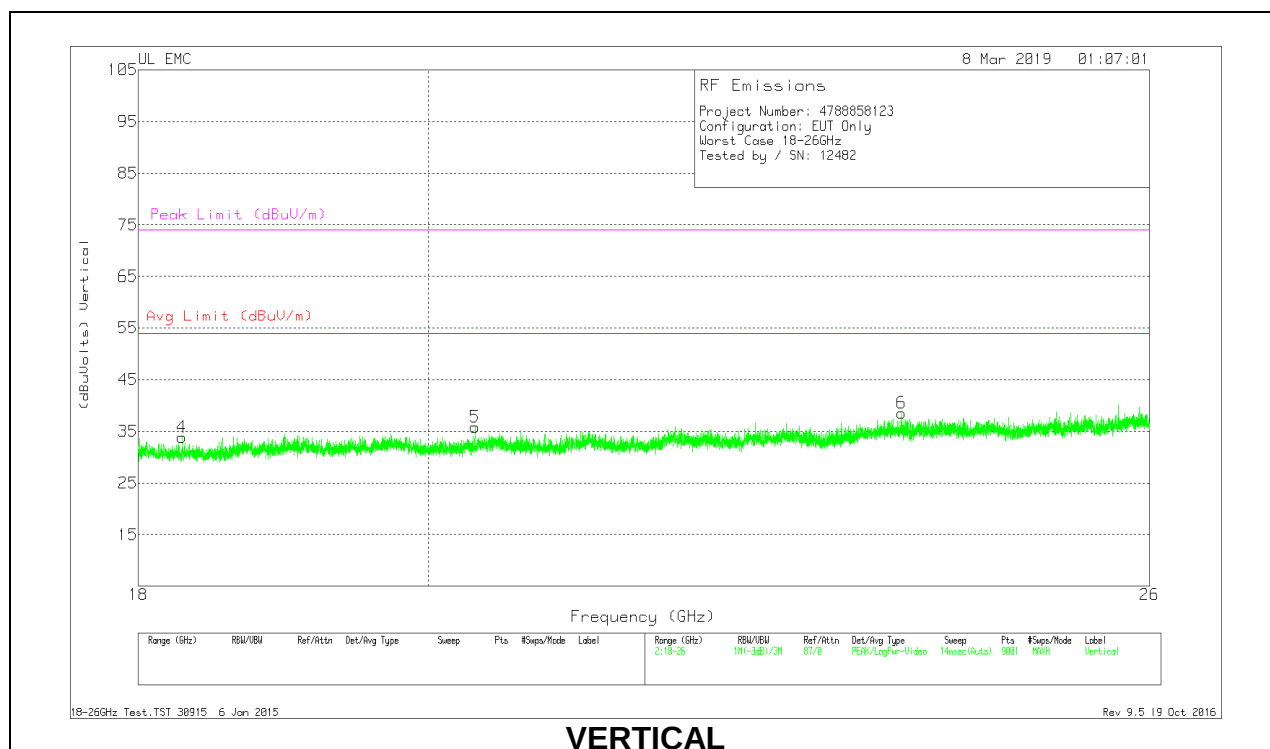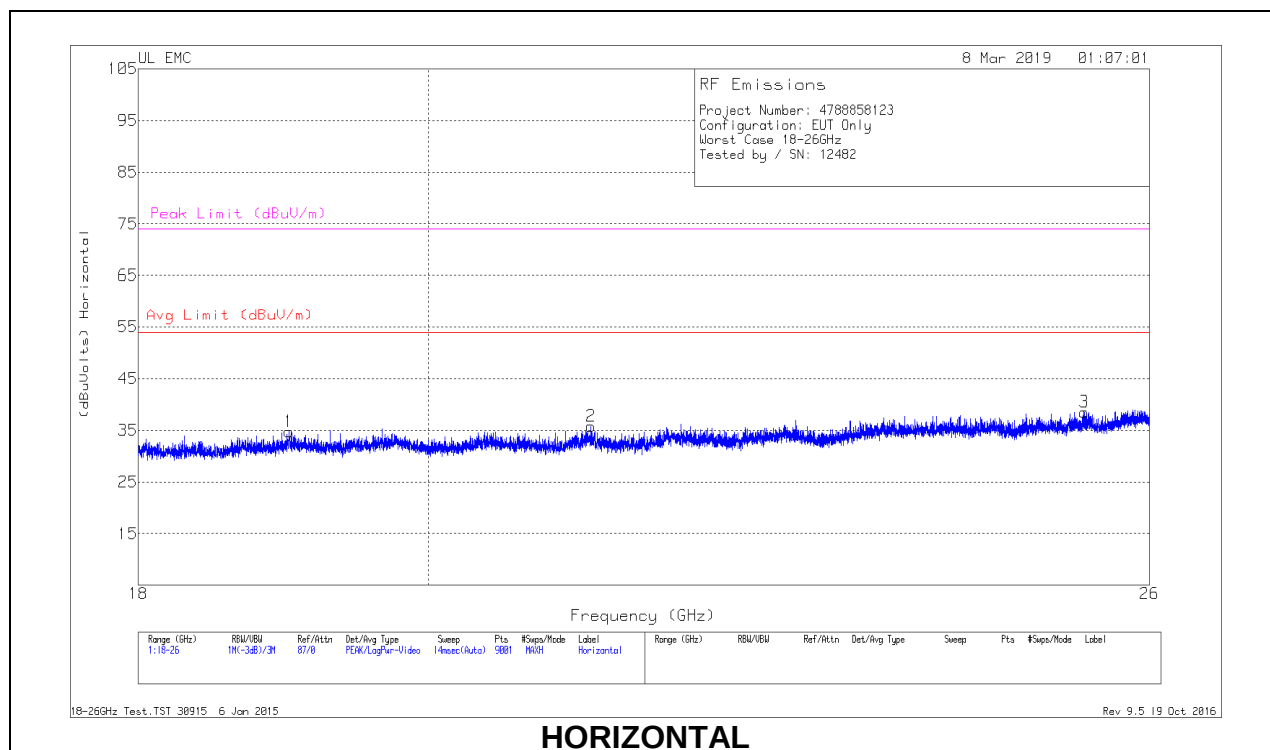

18 – 26GHz DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	T447 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	19.013	36.38	Pk	32.6	-24.7	-9.5	34.78	54	-19.22	74	-39.22
2	21.22	37.08	Pk	33	-24.8	-9.5	35.78	54	-18.22	74	-38.22
3	25.391	37.8	Pk	34.5	-24.3	-9.5	38.5	54	-15.5	74	-35.5
4	18.288	36.23	Pk	32.3	-25.2	-9.5	33.83	54	-20.17	74	-40.17
5	20.343	37.94	Pk	32.8	-25.4	-9.5	35.84	54	-18.16	74	-38.16
6	23.756	38.13	Pk	34.1	-24.2	-9.5	38.53	54	-15.47	74	-35.47

1.4. WORST CASE 26-40 GHz

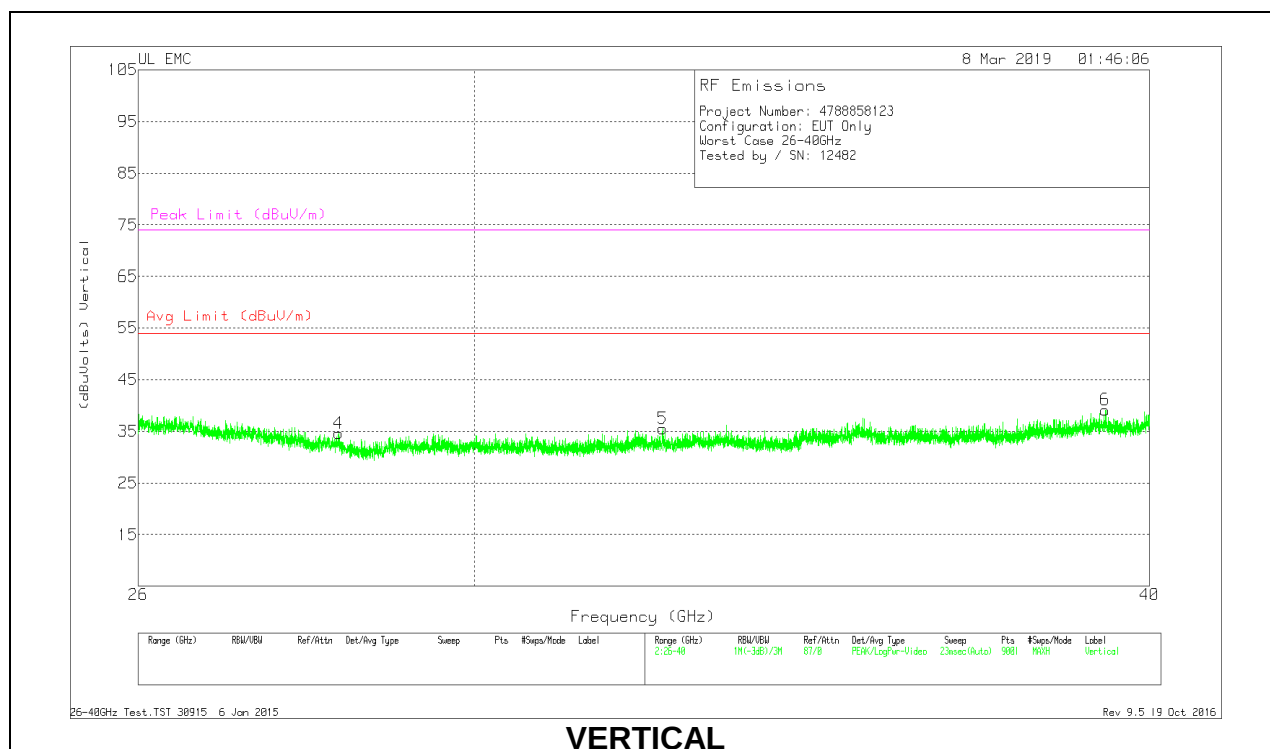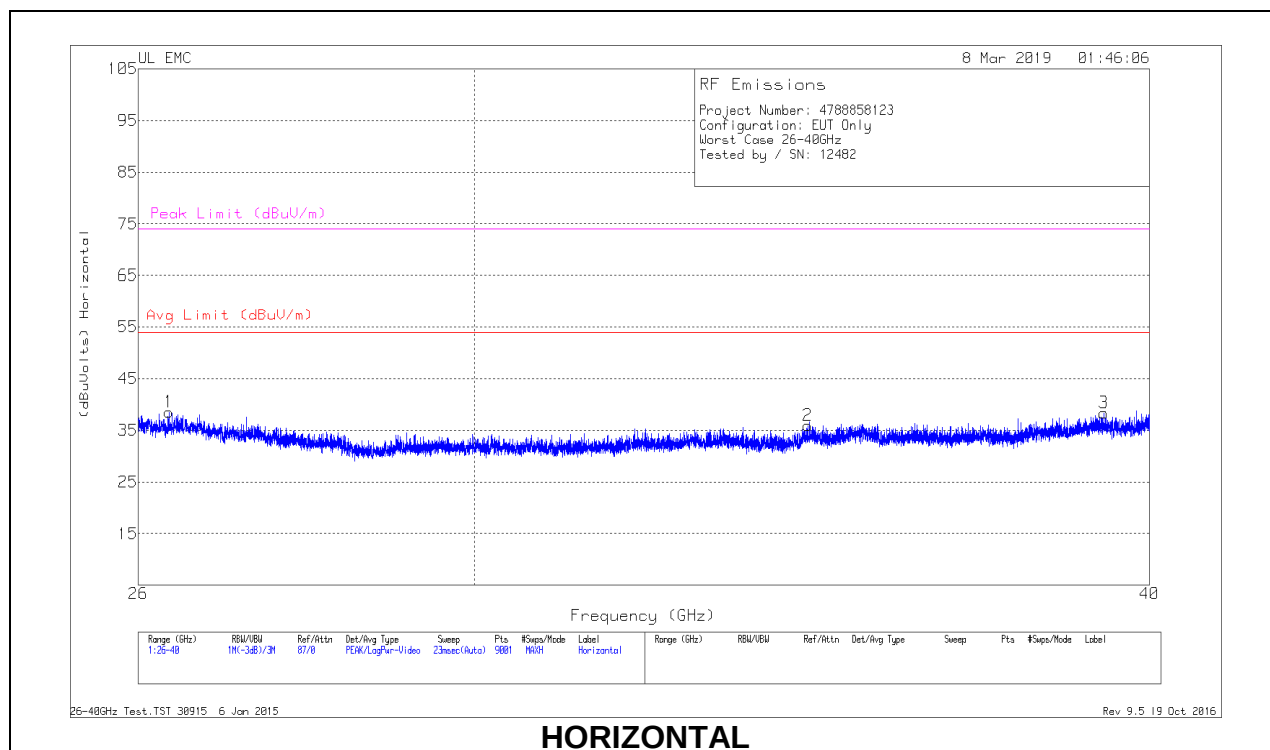

26 – 40GHz DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T90 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	26.341	43.23	Pk	35.6	-30.8	-9.5	38.53	54	-15.47	74	-35.47
2	34.577	41.24	Pk	37.4	-33.2	-9.5	35.94	54	-18.06	74	-38.06
3	39.227	41.84	Pk	38.5	-32.5	-9.5	38.34	54	-15.66	74	-35.66
4	28.313	39.79	Pk	35.8	-31.5	-9.5	34.59	54	-19.41	74	-39.41
5	32.505	41.61	Pk	36.1	-32.7	-9.5	35.51	54	-18.49	74	-38.49
6	39.249	42.03	Pk	38.6	-32	-9.5	39.13	54	-14.87	74	-34.87

2. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

2.1.1. AC Power Line Host

LINE 1 RESULTS

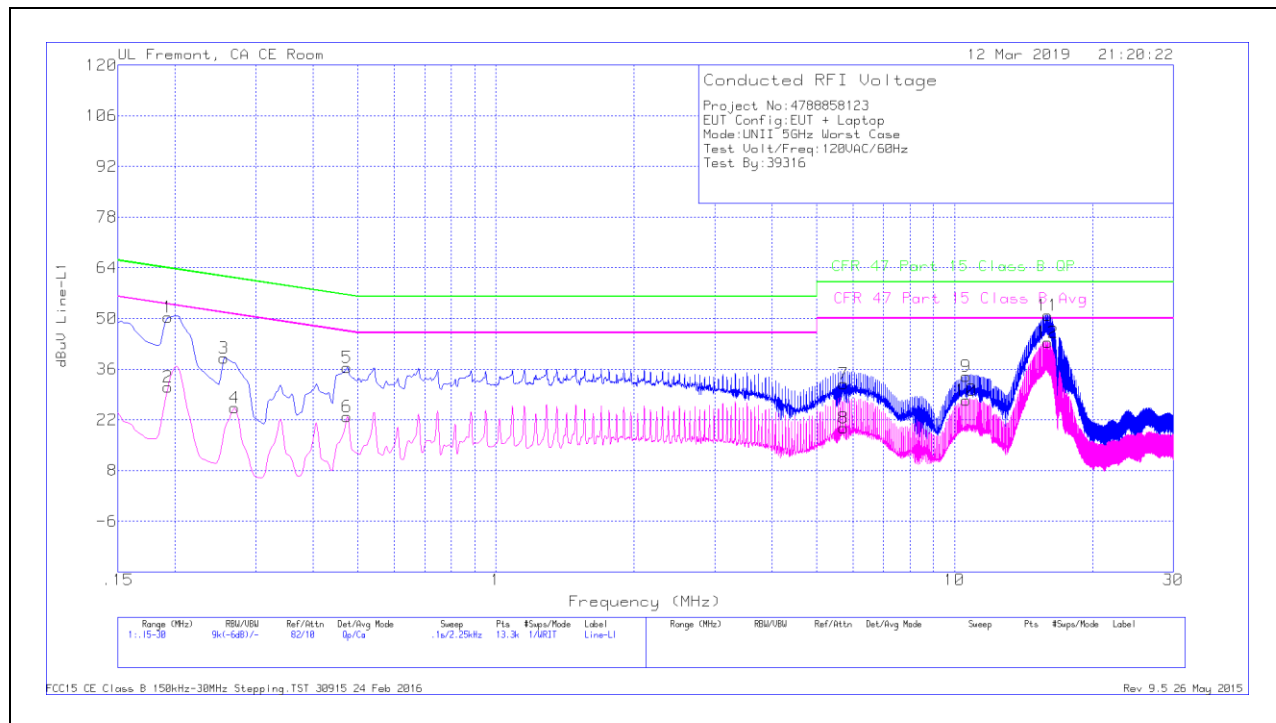


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.19275	40.25	Qp	0	0	10.1	50.35	63.92	-13.57	-	-
2	.19275	20.9	Ca	0	0	10.1	31	-	-	53.92	-22.92
3	.25575	28.92	Qp	0	0	10.1	39.02	61.57	-22.55	-	-
4	.26925	15.18	Ca	0	0	10.1	25.28	-	-	51.14	-25.86
5	.474	26.34	Qp	0	0	10.1	36.44	56.44	-20	-	-
6	.474	12.84	Ca	0	0	10.1	22.94	-	-	46.44	-23.5
7	5.739	21.56	Qp	0	.2	10.2	31.96	60	-28.04	-	-
8	5.739	9.39	Ca	0	.2	10.2	19.79	-	-	50	-30.21
9	10.593	23.65	Qp	0	.2	10.2	34.05	60	-25.95	-	-
10	10.5923	17.07	Ca	0	.2	10.2	27.47	-	-	50	-22.53
11	15.9585	40.21	Qp	.1	.3	10.3	50.91	60	-9.09	-	-
12	15.9585	32.76	Ca	.1	.3	10.3	43.46	-	-	50	-6.54

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

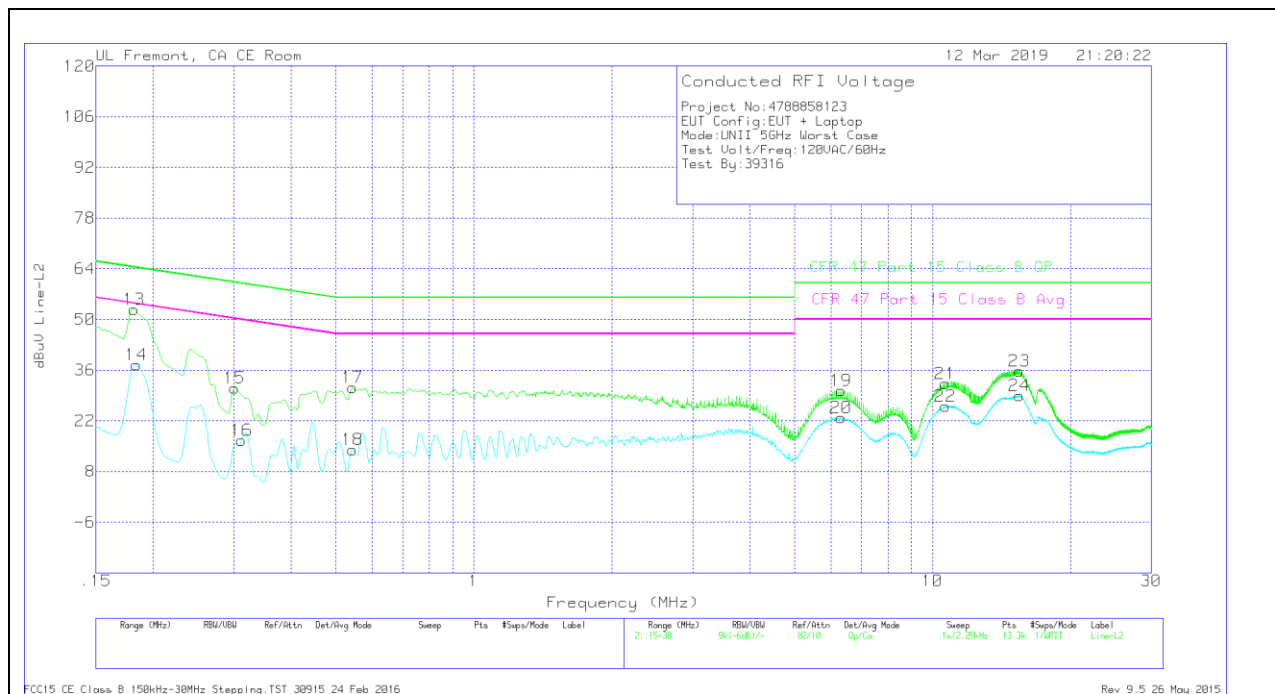


Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.1815	42.61	Qp	0	0	10.1	52.71	64.42	-11.71	-	-
14	.18375	27.45	Ca	0	0	10.1	37.55	-	-	54.31	-16.76
15	.30075	20.98	Qp	0	0	10.1	31.08	60.22	-29.14	-	-
16	.312	6.53	Ca	0	0	10.1	16.63	-	-	49.92	-33.29
17	.54375	21.1	Qp	0	0	10.1	31.2	56	-24.8	-	-
18	.54375	3.88	Ca	0	0	10.1	13.98	-	-	46	-32.02
19	6.3105	19.89	Qp	0	.2	10.2	30.29	60	-29.71	-	-
20	6.3105	12.52	Ca	0	.2	10.2	22.92	-	-	50	-27.08
21	10.653	21.87	Qp	0	.2	10.2	32.27	60	-27.73	-	-
22	10.6553	15.57	Ca	0	.2	10.2	25.97	-	-	50	-24.03
23	15.4725	25.15	Qp	.1	.3	10.2	35.75	60	-24.25	-	-
24	15.469	18.3	Ca	.1	.3	10.2	28.9	-	-	50	-21.1

Qp - Quasi-Peak detector

Ca - CISPR average detection

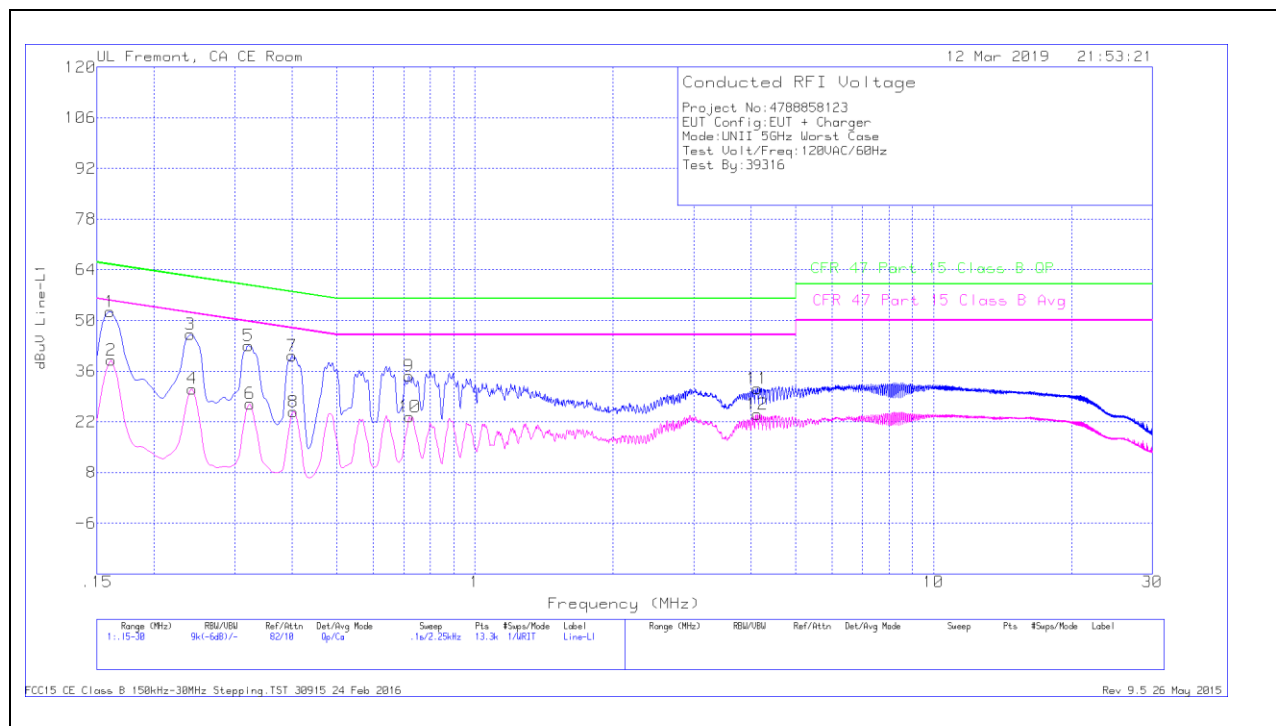
2.1.2. AC Power Line Norm**LINE 1 RESULTS****Range 1: Line-L1 .15 - 30MHz**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.16013	42.31	Qp	.1	0	10.1	52.51	65.46	-12.95	-	-
2	.16125	28.77	Ca	.1	0	10.1	38.97	-	-	55.4	-16.43
3	.24	36.04	Qp	0	0	10.1	46.14	62.1	-15.96	-	-
4	.24225	21.04	Ca	0	0	10.1	31.14	-	-	52.02	-20.88
5	.321	32.95	Qp	0	0	10.1	43.05	59.68	-16.63	-	-
6	.32325	16.87	Ca	0	0	10.1	26.97	-	-	49.62	-22.65
7	.39975	30.18	Qp	0	0	10.1	40.28	57.86	-17.58	-	-
8	.402	14.74	Ca	0	0	10.1	24.84	-	-	47.81	-22.97
9	.71925	24.59	Qp	0	0	10.1	34.69	56	-21.31	-	-
10	.7215	13.35	Ca	0	0	10.1	23.45	-	-	46	-22.55
11	4.13588	20.96	Qp	0	.1	10.1	31.16	56	-24.84	-	-
12	4.1325	13.83	Ca	0	.1	10.1	24.03	-	-	46	-21.97

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

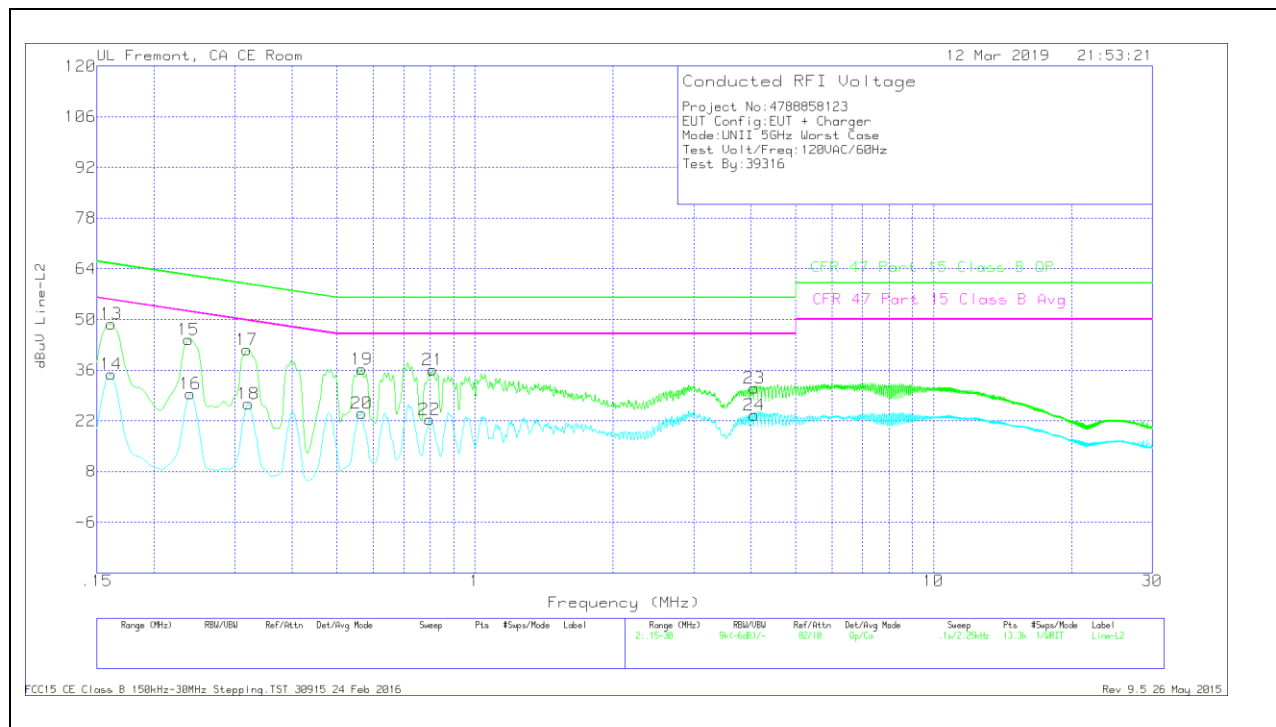

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.16125	38.55	Qp	.1	0	10.1	48.75	65.4	-16.65	-	-
14	.16125	24.7	Ca	.1	0	10.1	34.9	-	-	55.4	-20.5
15	.23775	34.28	Qp	0	0	10.1	44.38	62.17	-17.79	-	-
16	.24	19.44	Ca	0	0	10.1	29.54	-	-	52.1	-22.56
17	.31875	31.49	Qp	0	0	10.1	41.59	59.74	-18.15	-	-
18	.321	16.53	Ca	0	0	10.1	26.63	-	-	49.68	-23.05
19	.56625	26.18	Qp	0	0	10.1	36.28	56	-19.72	-	-
20	.56625	13.93	Ca	0	0	10.1	24.03	-	-	46	-21.97
21	.80925	25.92	Qp	0	0	10.1	36.02	56	-19.98	-	-
22	.79575	12.2	Ca	0	0	10.1	22.3	-	-	46	-23.7
23	4.06275	20.88	Qp	0	.1	10.1	31.08	56	-24.92	-	-
24	4.06275	13.33	Ca	0	.1	10.1	23.53	-	-	46	-22.47

Qp - Quasi-Peak detector
Ca - CISPR average detection

END OF TEST REPORT

3. SETUP PHOTOS

Please refer to 12696946-EP1V1 for setup photos