


VERTICAL RESULT

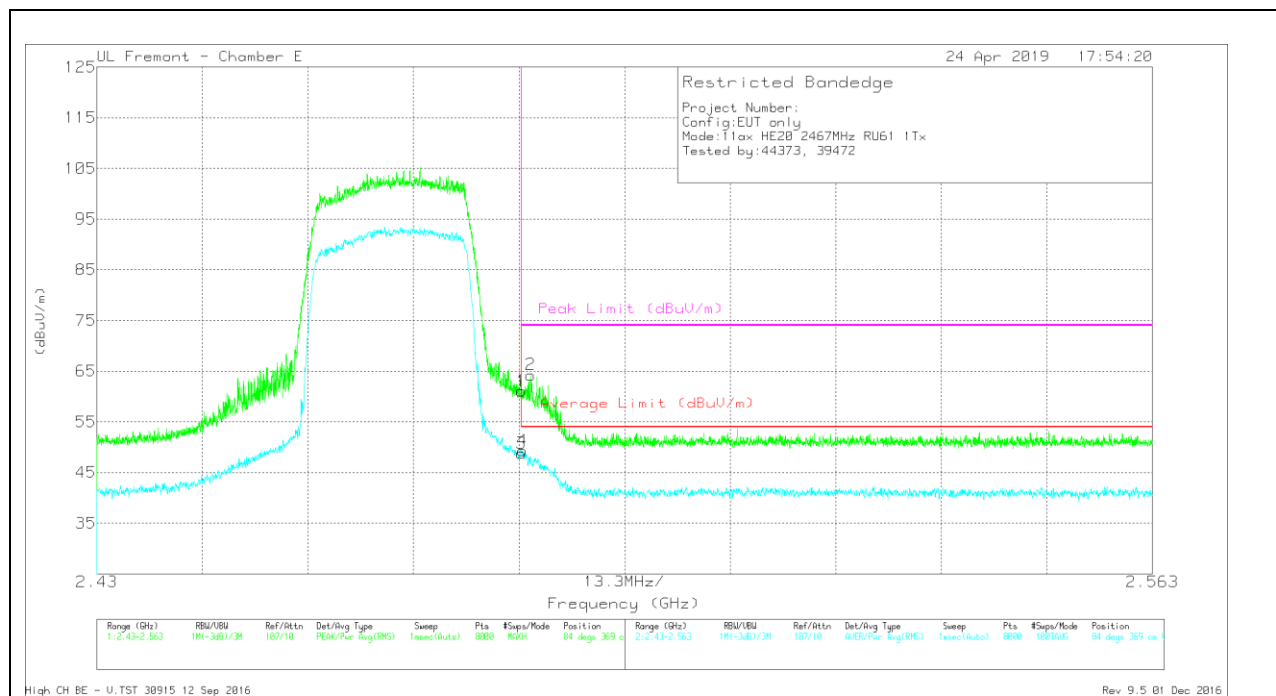

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	54.57	Pk	32.8	-26.3	61.07	-	-	74	-12.93	84	369	V
2	* 2.485	57.76	Pk	32.8	-26.3	64.26	-	-	74	-9.74	84	369	V
3	* 2.484	42.3	RMS	32.8	-26.3	48.8	54	-5.2	-	-	84	369	V
4	* 2.484	42.8	RMS	32.8	-26.3	49.3	54	-4.7	-	-	84	369	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

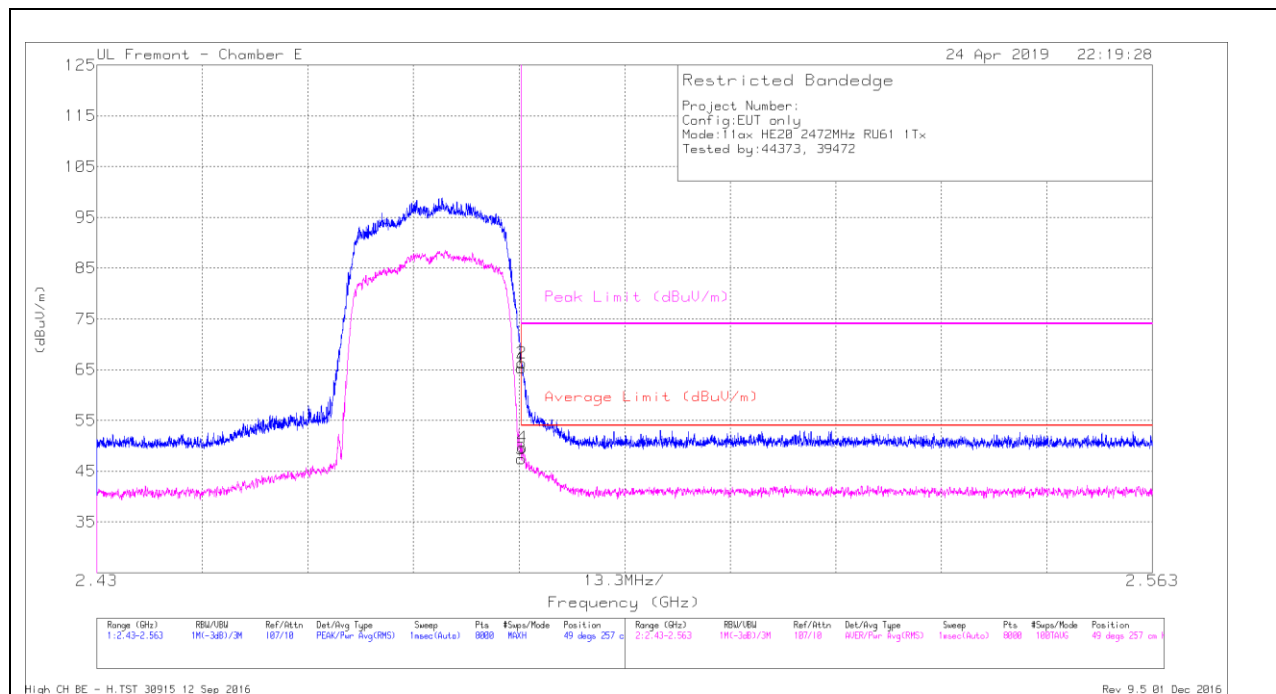


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	58.77	Pk	32.8	-26.3	65.27	-	-	74	-8.73	49	257	H
2	* 2.484	59.86	Pk	32.8	-26.3	66.36	-	-	74	-7.64	49	257	H
3	* 2.484	40.93	RMS	32.8	-26.3	47.43	54	-6.57	-	-	49	257	H
4	* 2.484	43.21	RMS	32.8	-26.3	49.71	54	-4.29	-	-	49	257	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

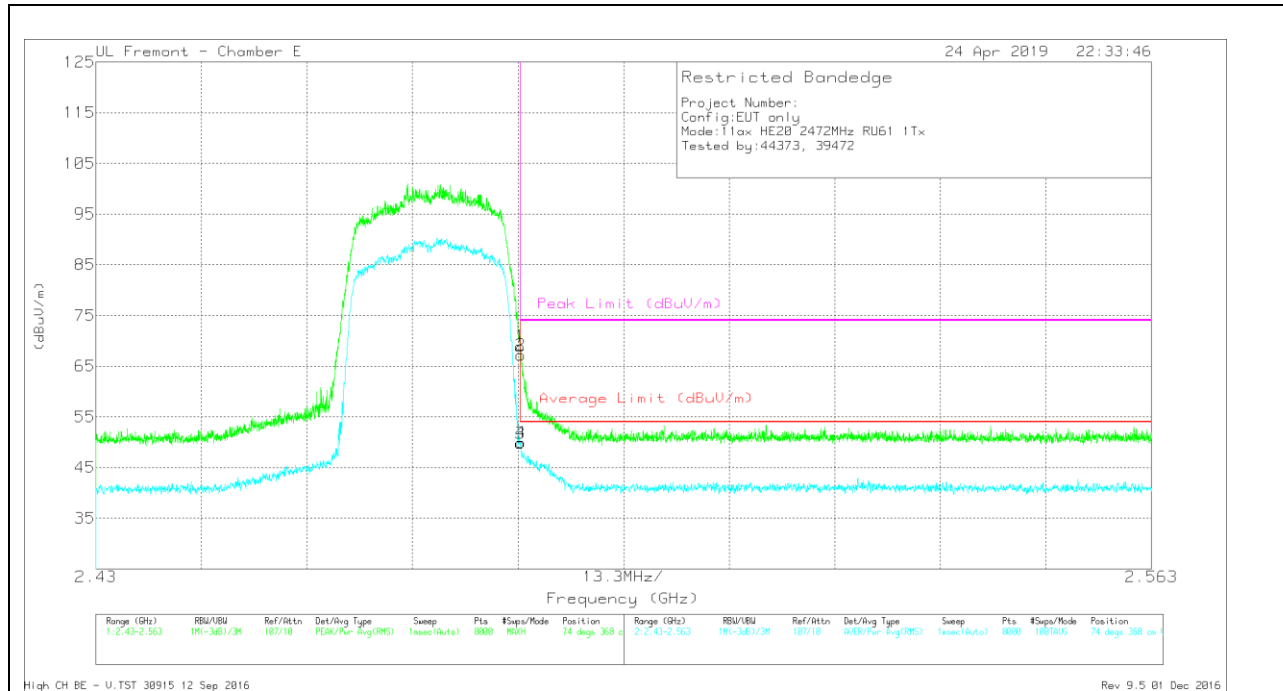


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	62.38	Pk	32.8	-26.3	68.88	-	-	74	-5.12	74	368	V
2	* 2.484	60.65	Pk	32.8	-26.3	67.15	-	-	74	-6.85	74	368	V
3	* 2.484	43.26	RMS	32.8	-26.3	49.76	54	-4.24	-	-	74	368	V
4	* 2.484	43.41	RMS	32.8	-26.3	49.91	54	-4.09	-	-	74	368	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

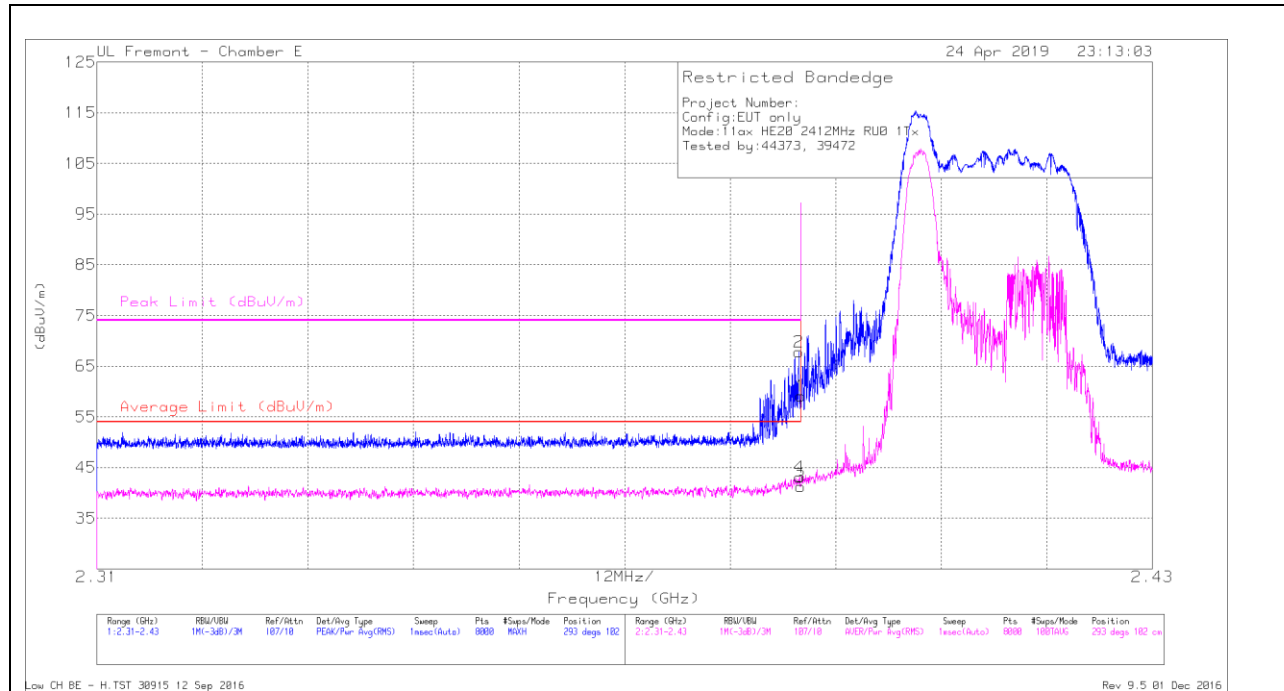BANDEDGE (LOW CHANNEL, CH 1)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.03	PK	32.3	-26.2	59.13	-	-	74	-14.87	293	102	H
2	* 2.39	61.68	PK	32.3	-26.2	67.78	-	-	74	-6.22	293	102	H
3	* 2.39	35.12	RMS	32.3	-26.2	41.22	54	-12.78	-	-	293	102	H
4	* 2.39	36.96	RMS	32.3	-26.2	43.06	54	-10.94	-	-	293	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

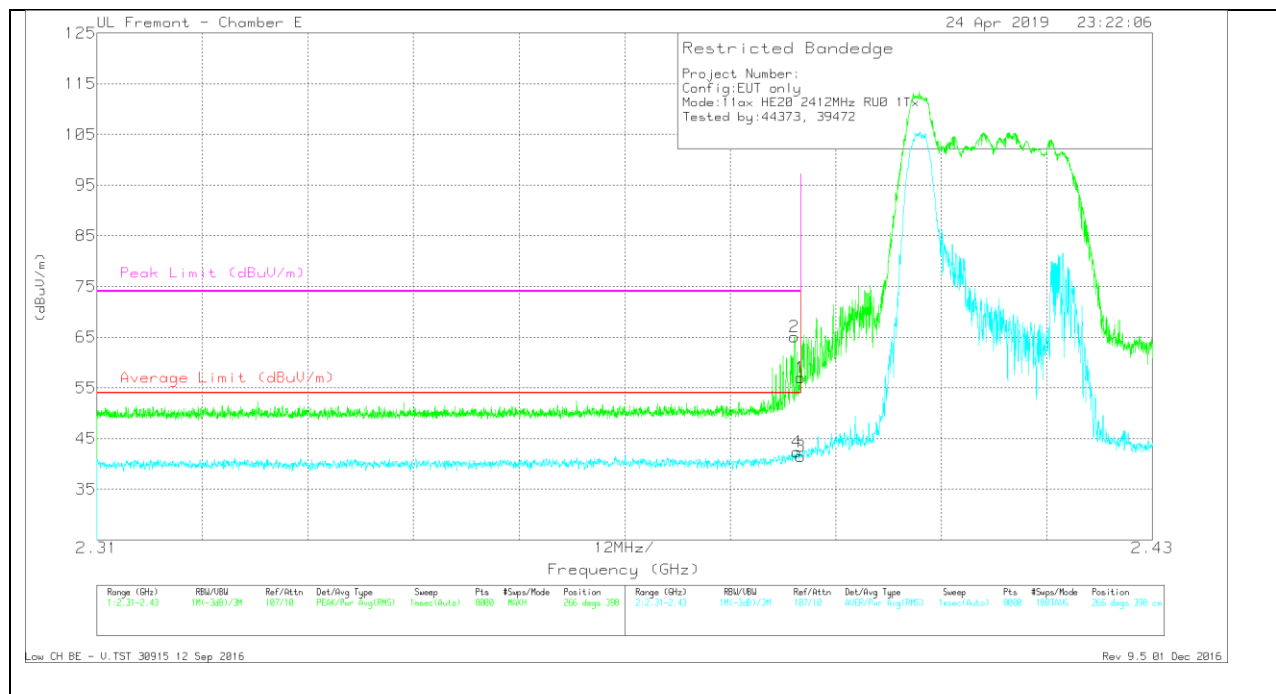


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	50.95	Pk	32.3	-26.2	57.05	-	-	74	-16.95	266	398	V
2	* 2.389	58.97	Pk	32.3	-26.2	65.07	-	-	74	-8.93	266	398	V
3	* 2.39	35.32	RMS	32.3	-26.2	41.42	54	-12.58	-	-	266	398	V
4	* 2.39	36.27	RMS	32.3	-26.2	42.37	54	-11.63	-	-	266	398	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

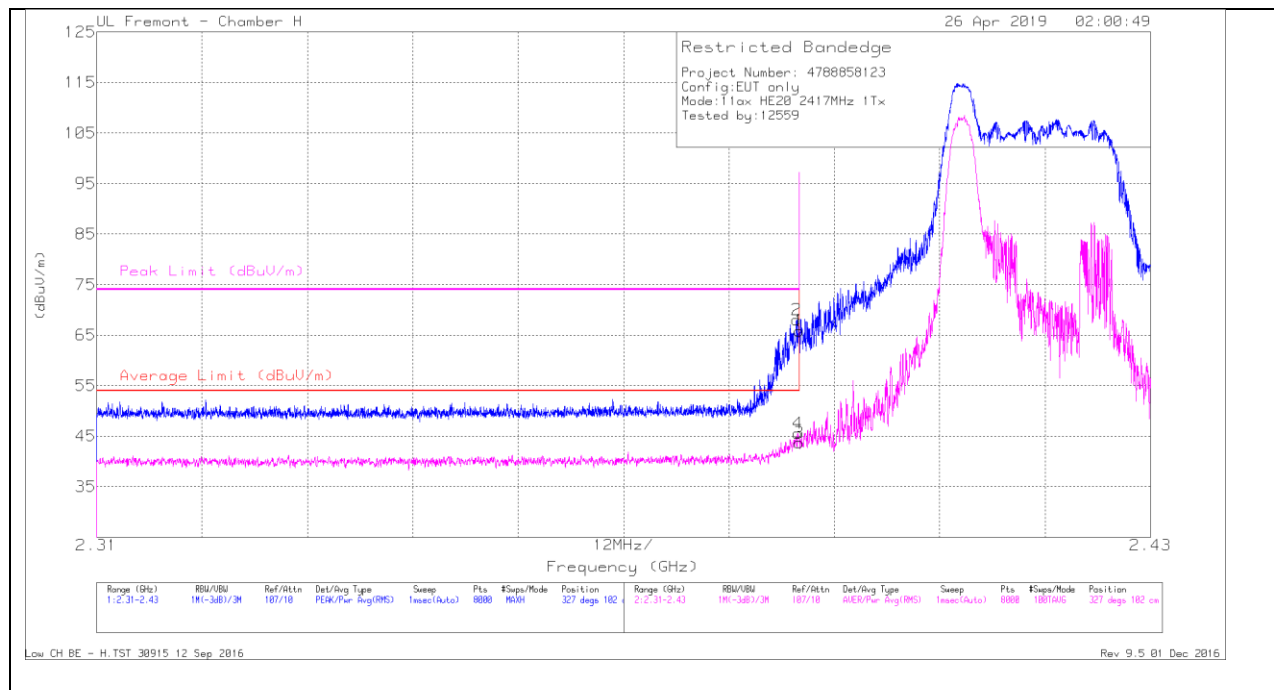BANDEDGE (LOW CHANNEL, CH 2)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	57.77	Pk	31.6	-23.5	65.87	-	-	74	-8.13	327	102	H
2	* 2.39	59.97	Pk	31.6	-23.5	68.07	-	-	74	-5.93	327	102	H
3	* 2.39	35.61	RMS	31.6	-23.5	43.71	54	-10.29	-	-	327	102	H
4	* 2.39	37.51	RMS	31.6	-23.5	45.61	54	-8.39	-	-	327	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

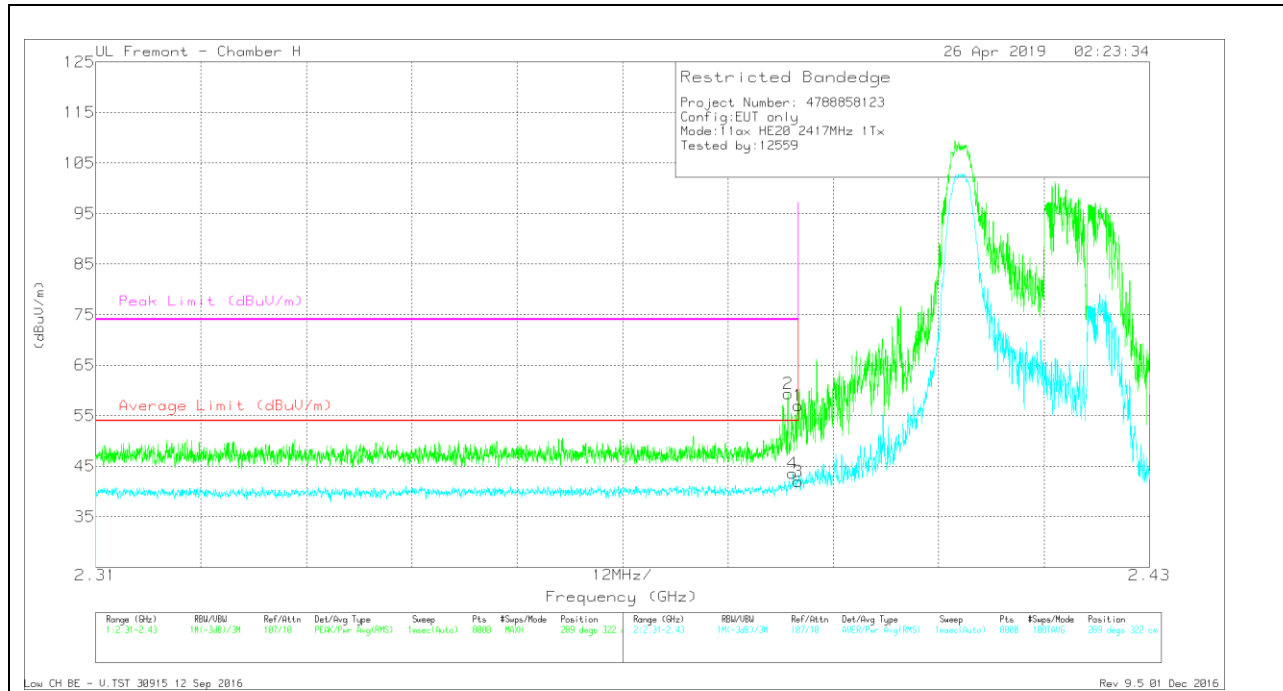


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.95	Pk	31.6	-23.5	57.05	-	-	74	-16.95	289	322	V
2	* 2.389	51.28	Pk	31.6	-23.5	59.38	-	-	74	-14.62	289	322	V
3	* 2.39	33.91	RMS	31.6	-23.5	42.01	54	-11.99	-	-	289	322	V
4	* 2.389	35.49	RMS	31.6	-23.5	43.59	54	-10.41	-	-	289	322	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

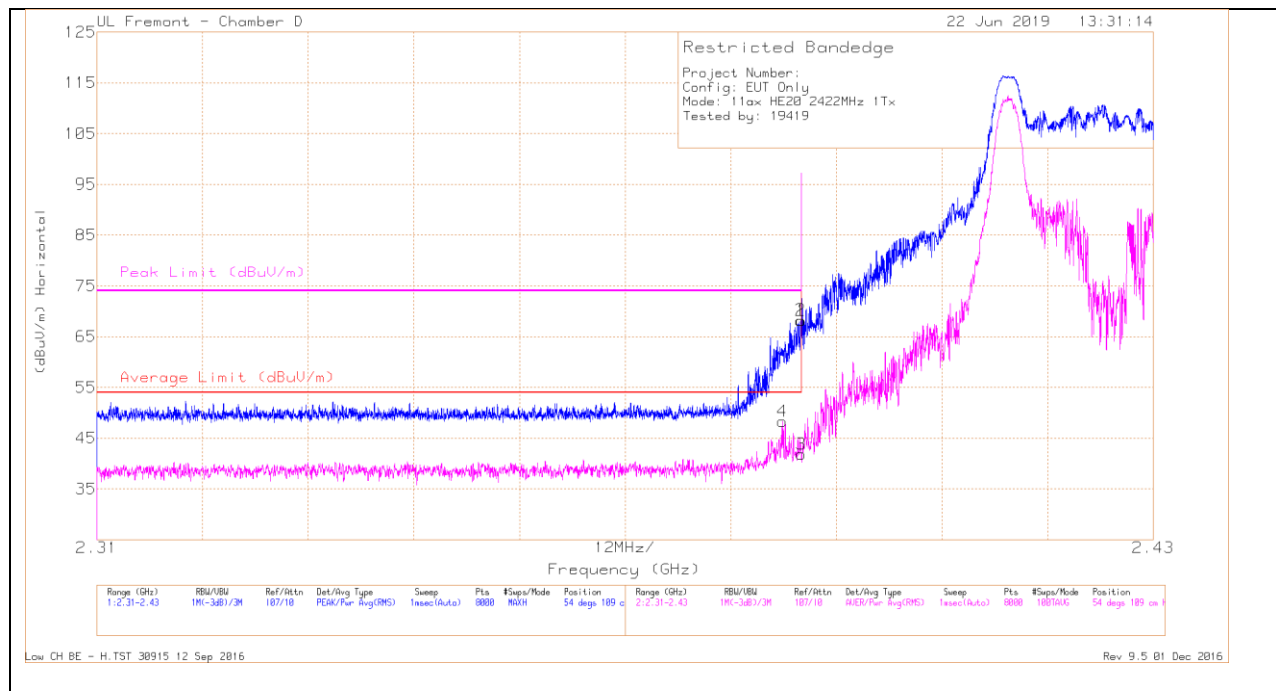


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Chl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	56.72	Pk	32	-20.6	68.12	-	-	74	-5.88	54	109	H
2	* 2.39	56.83	Pk	32	-20.6	68.23	-	-	74	-5.77	54	109	H
3	* 2.39	30.4	RMS	32	-20.6	41.8	54	-12.2	-	-	54	109	H
4	* 2.388	36.95	RMS	32	-20.6	48.35	54	-5.65	-	-	54	109	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

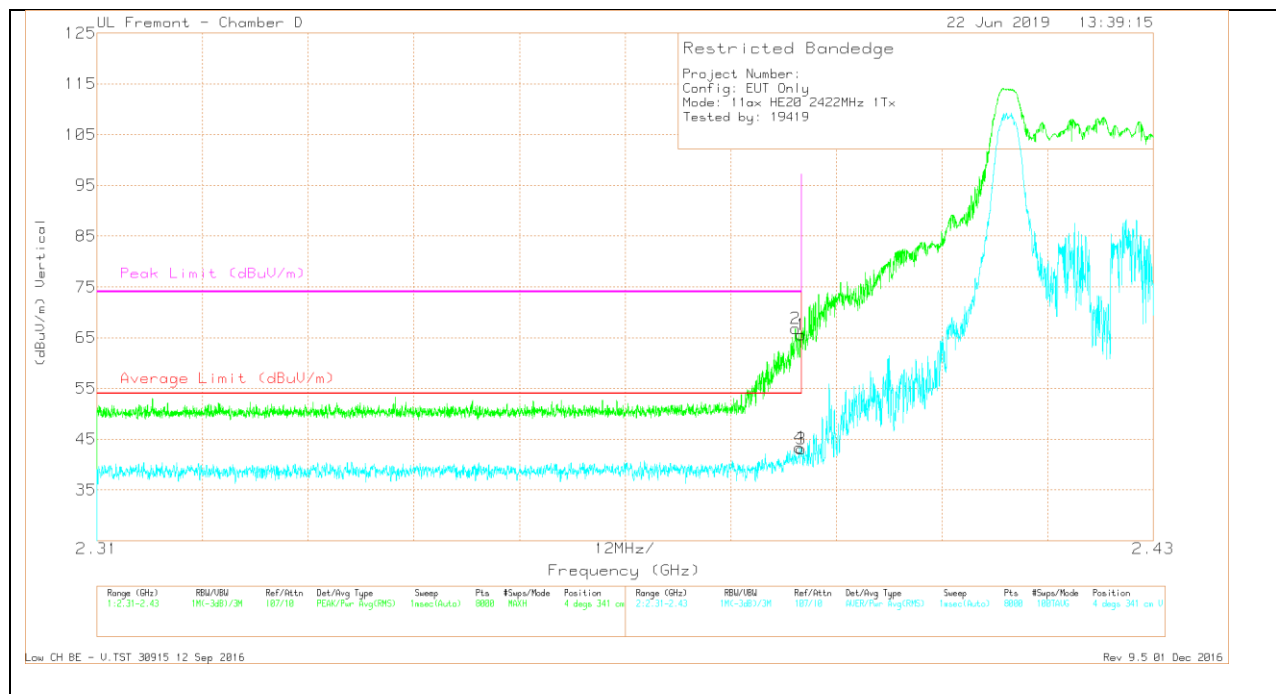


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.15	Pk	32	-20.6	65.55	-	-	74	-8.45	4	341	V
2	* 2.389	55.36	Pk	32	-20.6	66.76	-	-	74	-7.24	4	341	V
3	* 2.39	31.66	RMS	32	-20.6	43.06	54	-10.94	-	-	4	341	V
4	* 2.39	31.98	RMS	32	-20.6	43.38	54	-10.62	-	-	4	341	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

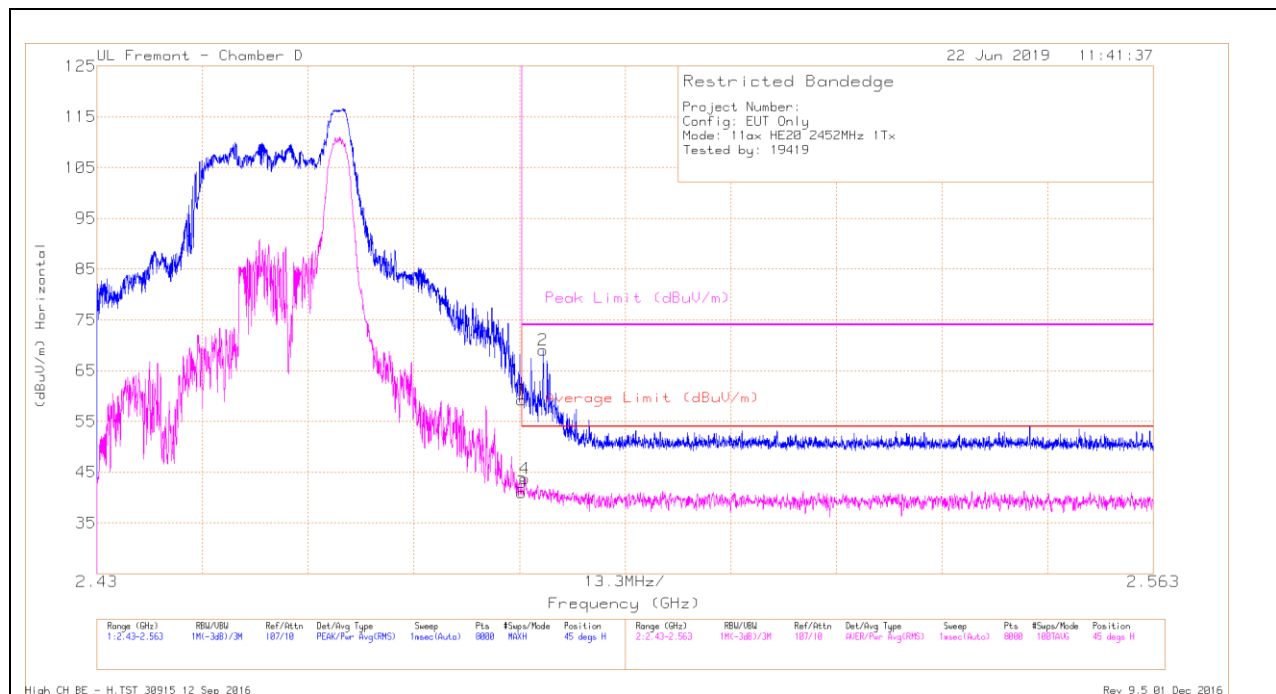BANDEDGE (HIGH CHANNEL, CH 9)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.38	Pk	32.4	-20.6	59.18	-	-	74	-14.82	45	105	H
2	* 2.486	57.36	Pk	32.3	-20.6	69.06	-	-	74	-4.94	45	105	H
3	* 2.484	29.13	RMS	32.4	-20.6	40.93	54	-13.07	-	-	45	105	H
4	* 2.484	31.89	RMS	32.4	-20.6	43.69	54	-10.31	-	-	45	105	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

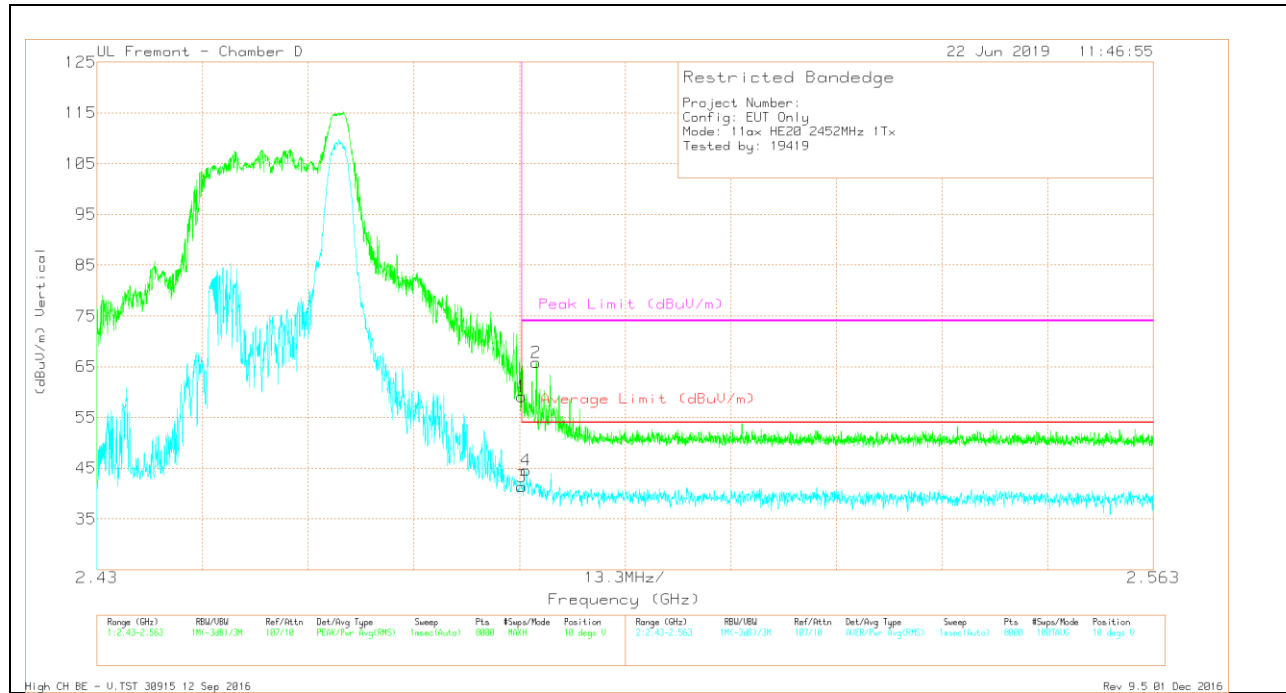


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.36	Pk	32.4	-20.6	59.16	-	-	74	-14.84	10	369	V
2	* 2.485	54.06	Pk	32.3	-20.6	65.76	-	-	74	-8.24	10	369	V
3	* 2.484	29.61	RMS	32.4	-20.6	41.41	54	-12.59	-	-	10	369	V
4	* 2.484	32.87	RMS	32.3	-20.6	44.57	54	-9.43	-	-	10	369	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

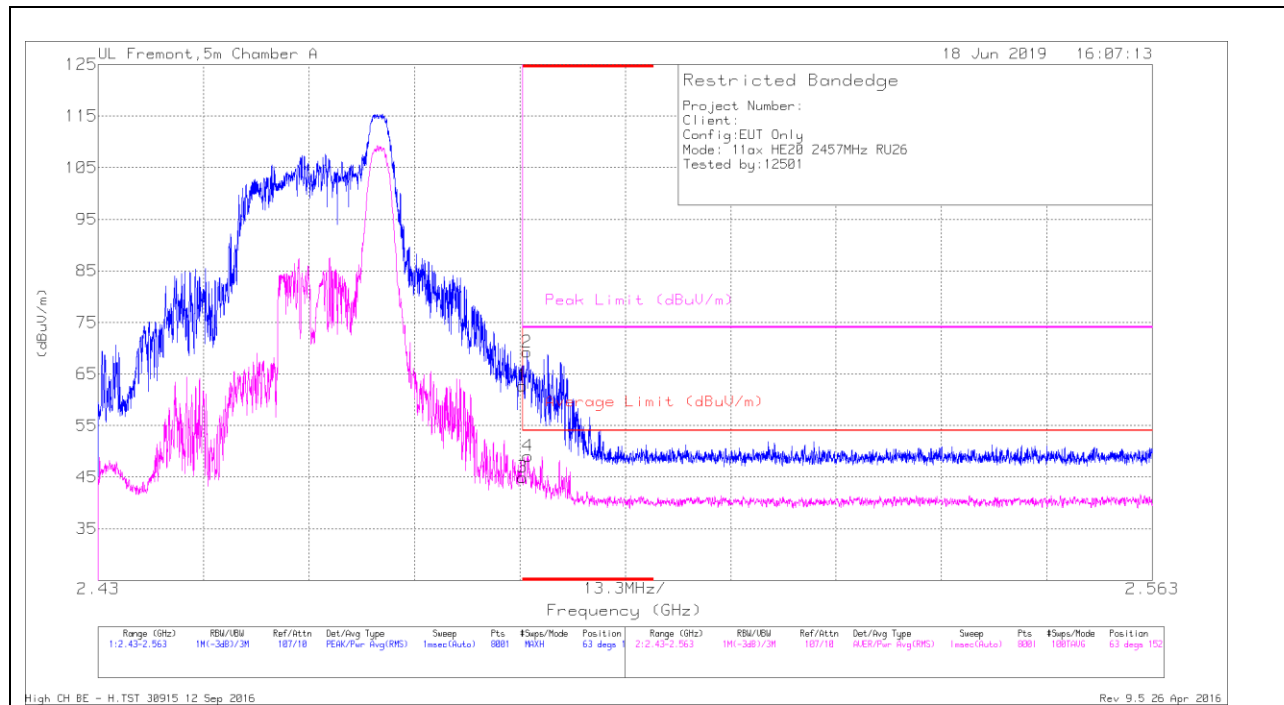BANDEDGE (HIGH CHANNEL, CH 10)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52.85	Pk	32.6	-22.7	62.75	-	-	74	-11.25	63	152	H
2	* 2.484	59.36	Pk	32.6	-22.7	69.26	-	-	74	-4.74	63	152	H
3	* 2.484	35.08	RMS	32.6	-22.7	44.98	54	-9.02	-	-	63	152	H
4	* 2.484	39.22	RMS	32.6	-22.7	49.12	54	-4.88	-	-	63	152	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

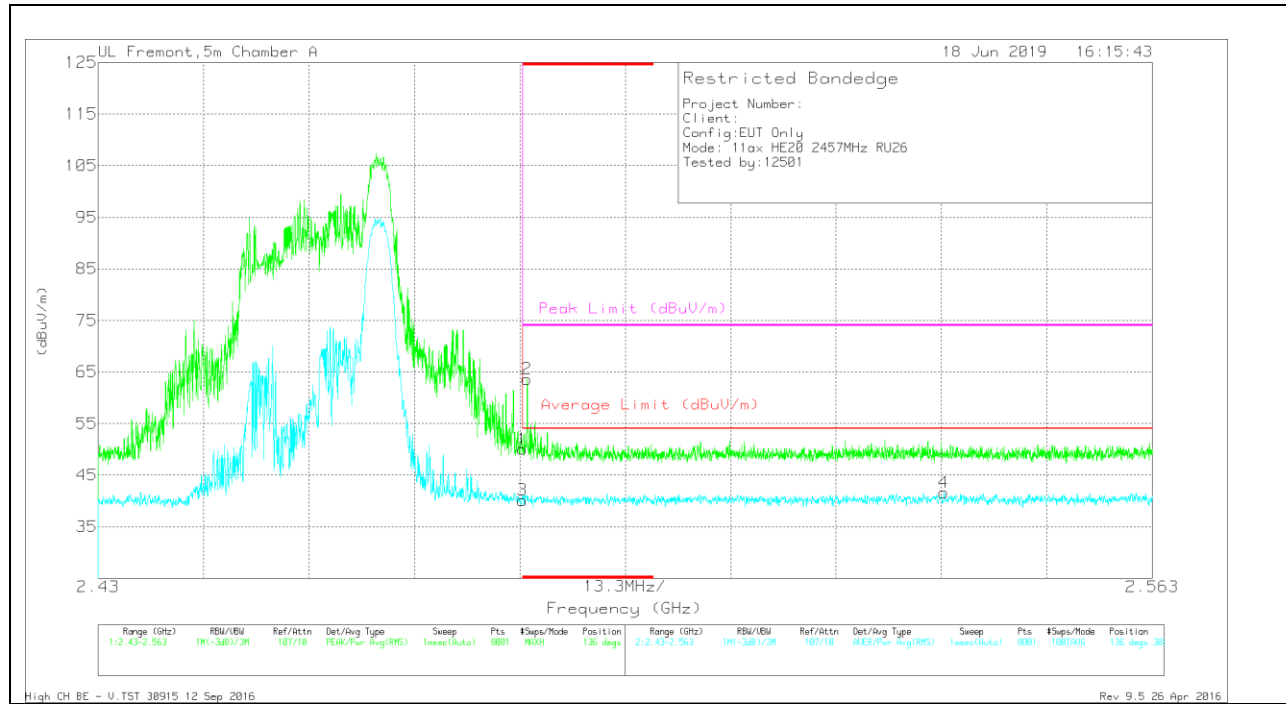


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Fltr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.13	Pk	32.6	-22.7	50.03	-	-	74	-23.97	136	388	V
2	* 2.484	53.73	Pk	32.6	-22.7	63.63	-	-	74	-10.37	136	388	V
3	* 2.484	30.23	RMS	32.6	-22.7	40.13	54	-13.87	-	-	136	388	V
4	2.537	31.49	RMS	32.6	-22.5	41.59	54	-12.41	-	-	136	388	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

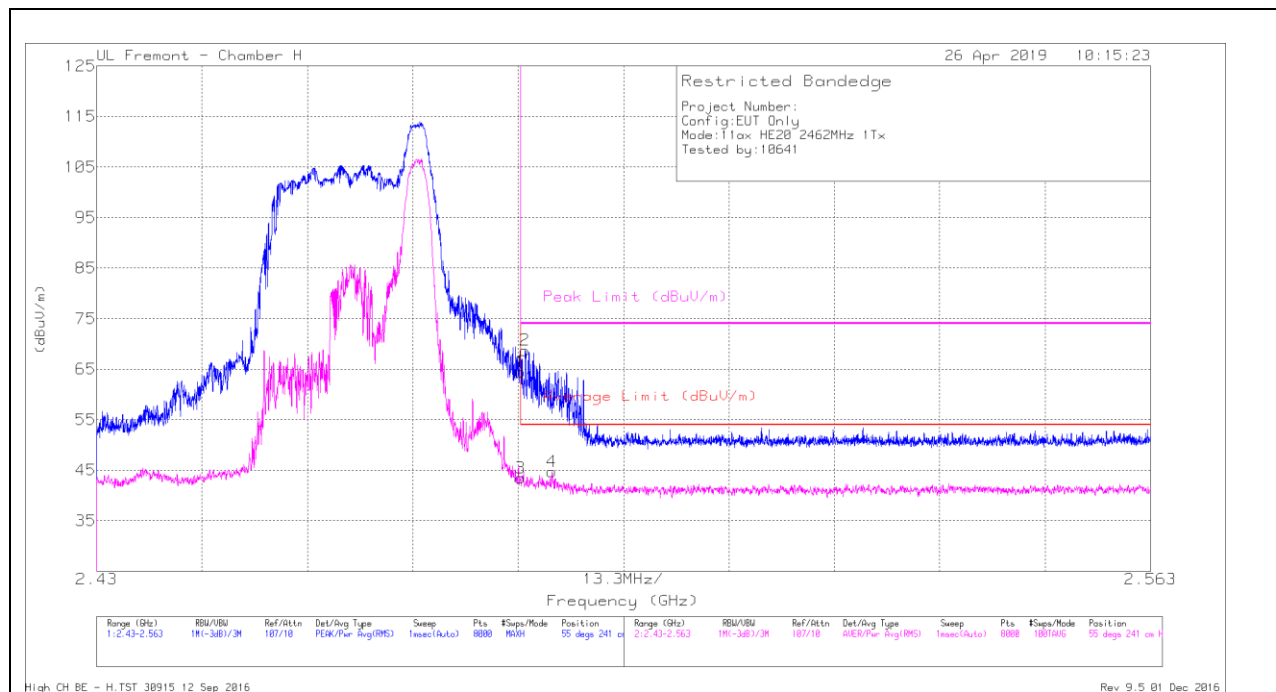BANDEDGE (HIGH CHANNEL, CH 11)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT136 (dB/m)	Amp/Cb/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.43	Pk	32.3	-23.3	64.43	-	-	74	-9.57	55	241	H
2	* 2.484	59.73	Pk	32.3	-23.3	68.73	-	-	74	-5.27	55	241	H
3	* 2.484	34.43	RMS	32.3	-23.3	43.43	54	-10.57	-	-	55	241	H
4	* 2.487	35.73	RMS	32.3	-23.3	44.73	54	-9.27	-	-	55	241	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

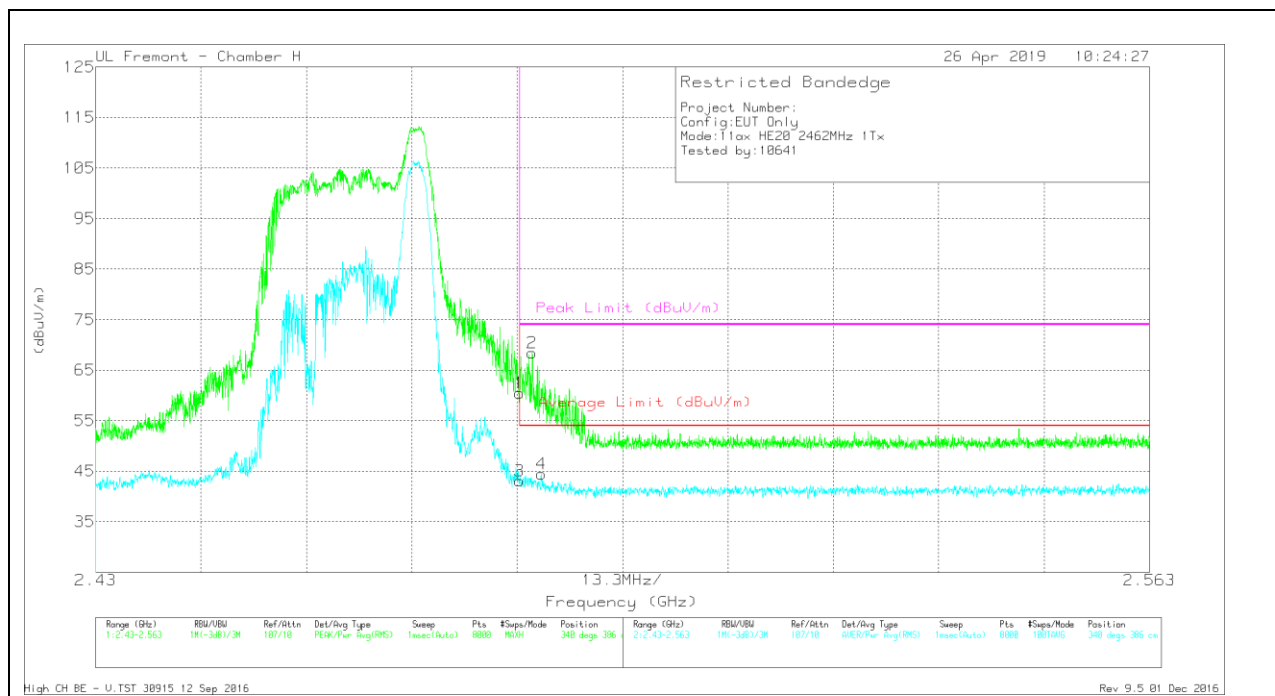

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.44	Pk	32.3	-23.3	60.44	-	-	74	-13.56	340	386	V
2	* 2.485	59.43	Pk	32.3	-23.3	68.43	-	-	74	-5.57	340	386	V
3	* 2.484	34.06	RMS	32.3	-23.3	43.06	54	-10.94	-	-	340	386	V
4	* 2.486	35.5	RMS	32.3	-23.3	44.5	54	-9.5	-	-	340	386	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

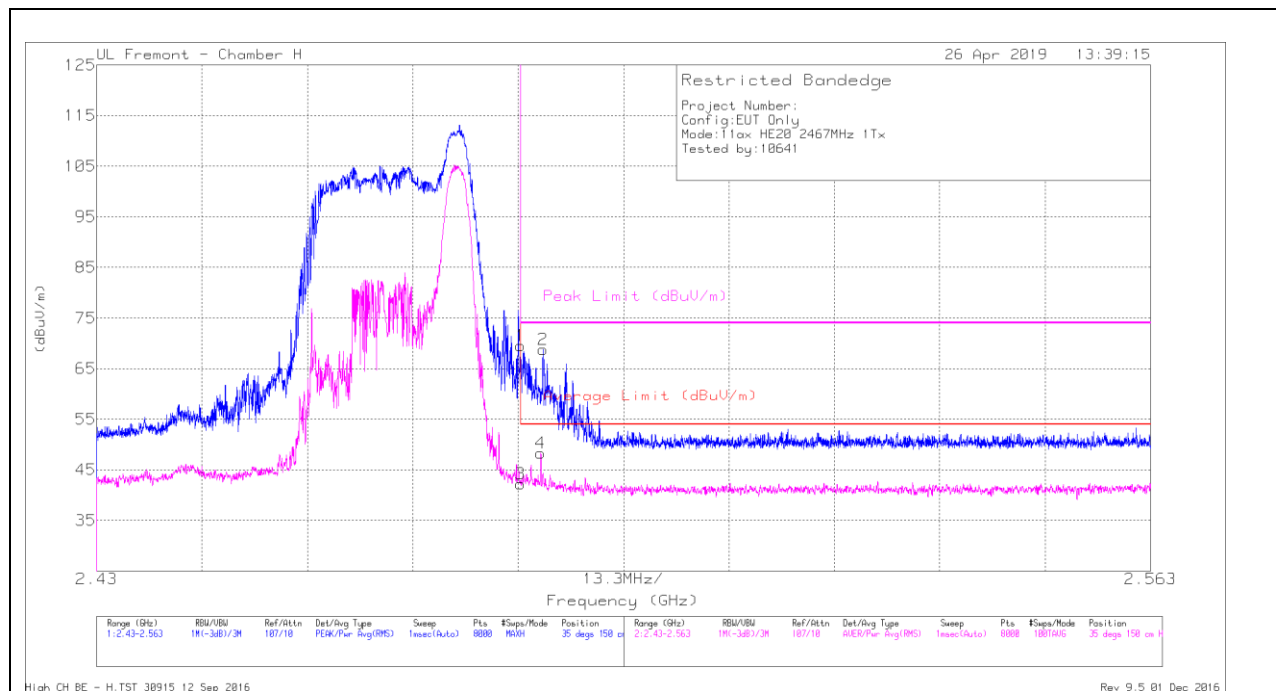


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT136 (dB/m)	Amp/Cb/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	60.52	Pk	32.3	-23.3	69.52	-	-	74	-4.48	35	150	H
2	* 2.486	59.76	Pk	32.3	-23.3	68.76	-	-	74	-5.24	35	150	H
3	* 2.484	33.27	RMS	32.3	-23.3	42.27	54	-11.73	-	-	35	150	H
4	* 2.486	39.3	RMS	32.3	-23.3	48.3	54	-5.7	-	-	35	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

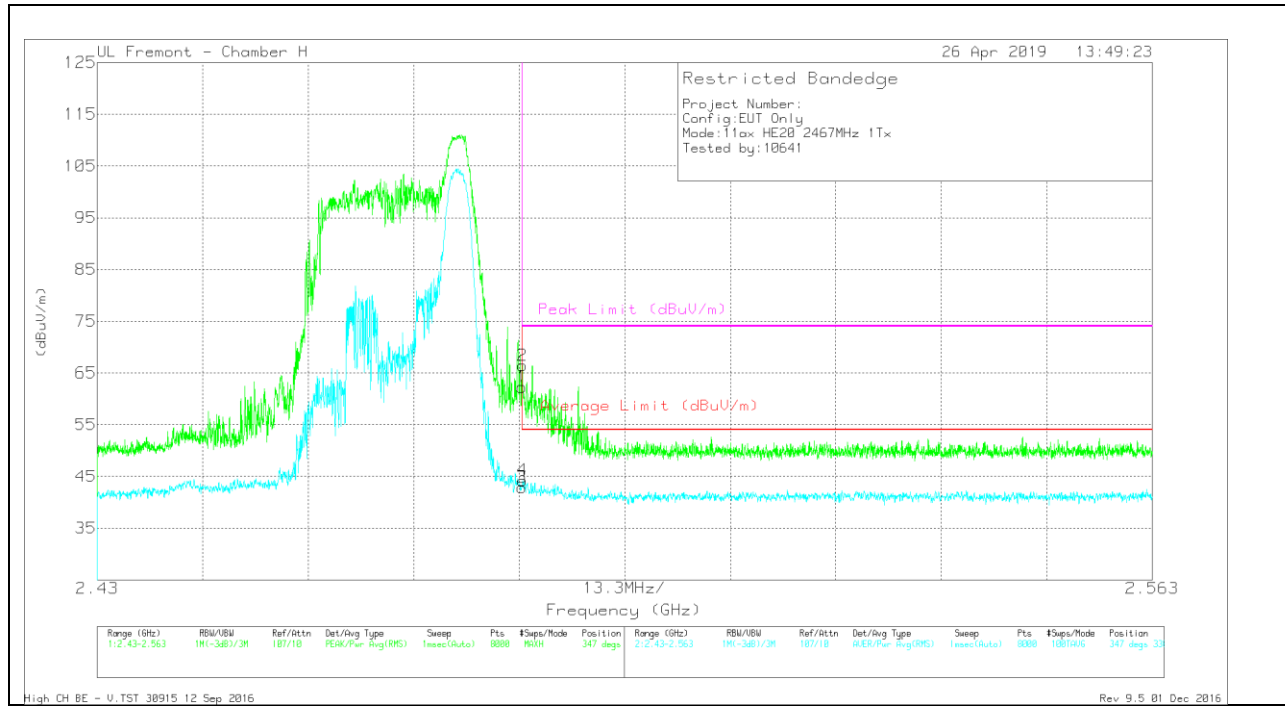


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.27	Pk	32.3	-23.3	62.27	-	-	74	-11.73	347	336	V
2	* 2.484	57.43	Pk	32.3	-23.3	66.43	-	-	74	-7.57	347	336	V
3	* 2.484	33.88	RMS	32.3	-23.3	42.88	54	-11.12	-	-	347	336	V
4	* 2.484	35.23	RMS	32.3	-23.3	44.23	54	-9.77	-	-	347	336	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

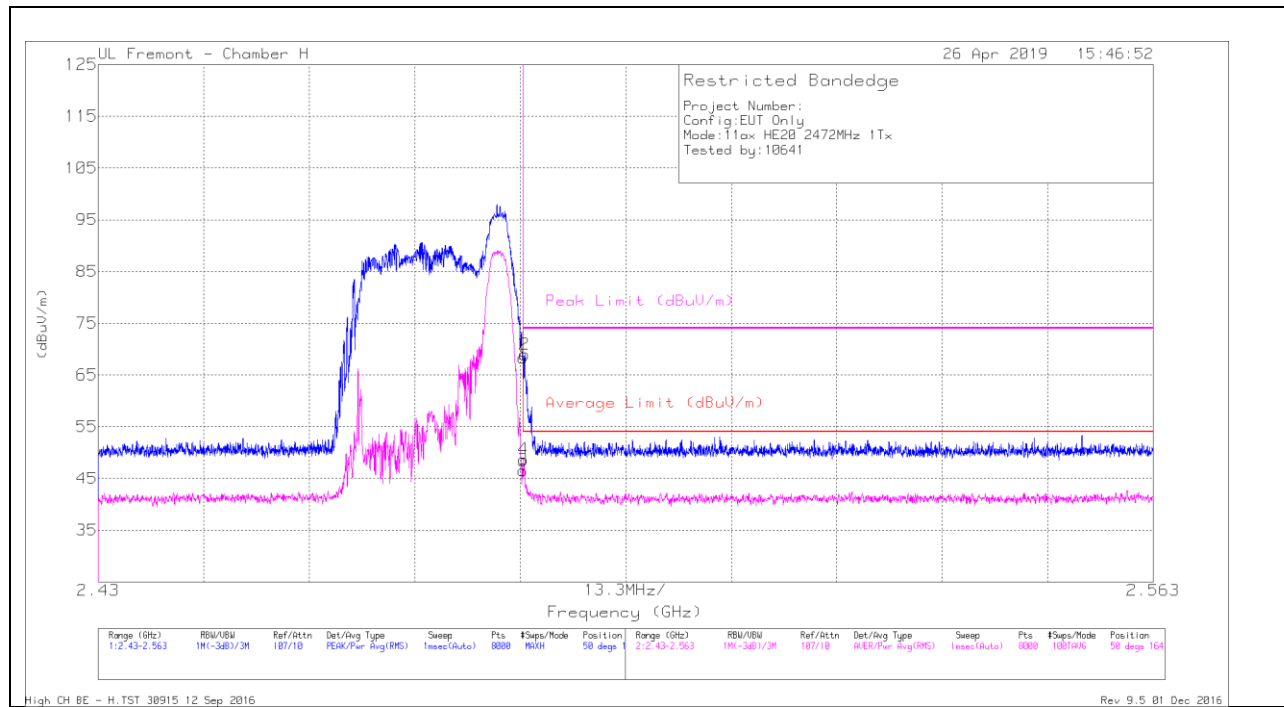BANEDGE (HIGH CHANNEL, CH 13)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	59.36	Pk	32.3	-23.3	68.36	-	-	74	-5.64	50	164	H
2	* 2.484	59.97	Pk	32.3	-23.3	68.97	-	-	74	-5.03	50	164	H
3	* 2.484	37.53	RMS	32.3	-23.3	46.53	54	-7.47	-	-	50	164	H
4	* 2.484	39.71	RMS	32.3	-23.3	48.71	54	-5.29	-	-	50	164	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

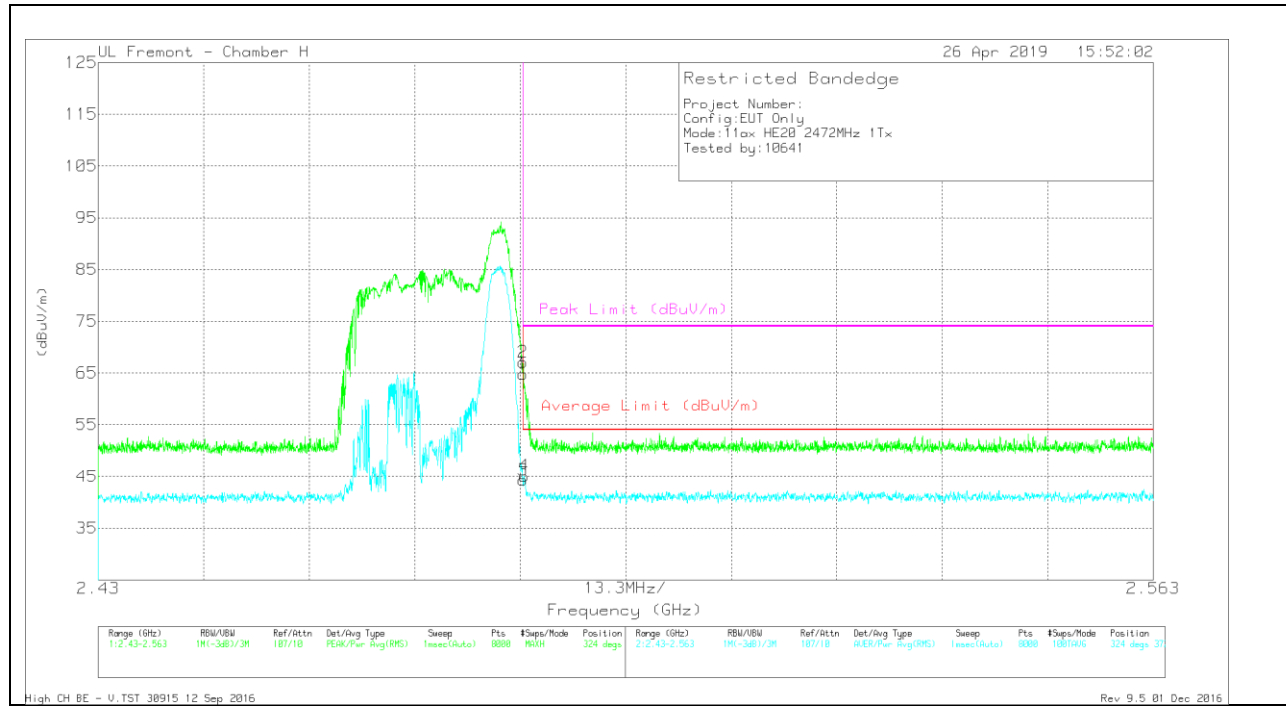


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.78	Pk	32.3	-23.3	64.78	-	-	74	-9.22	324	372	V
2	* 2.484	58.07	Pk	32.3	-23.3	67.07	-	-	74	-6.93	324	372	V
3	* 2.484	35.3	RMS	32.3	-23.3	44.3	54	-9.7	-	-	324	372	V
4	* 2.484	36.1	RMS	32.3	-23.3	45.1	54	-8.9	-	-	324	372	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

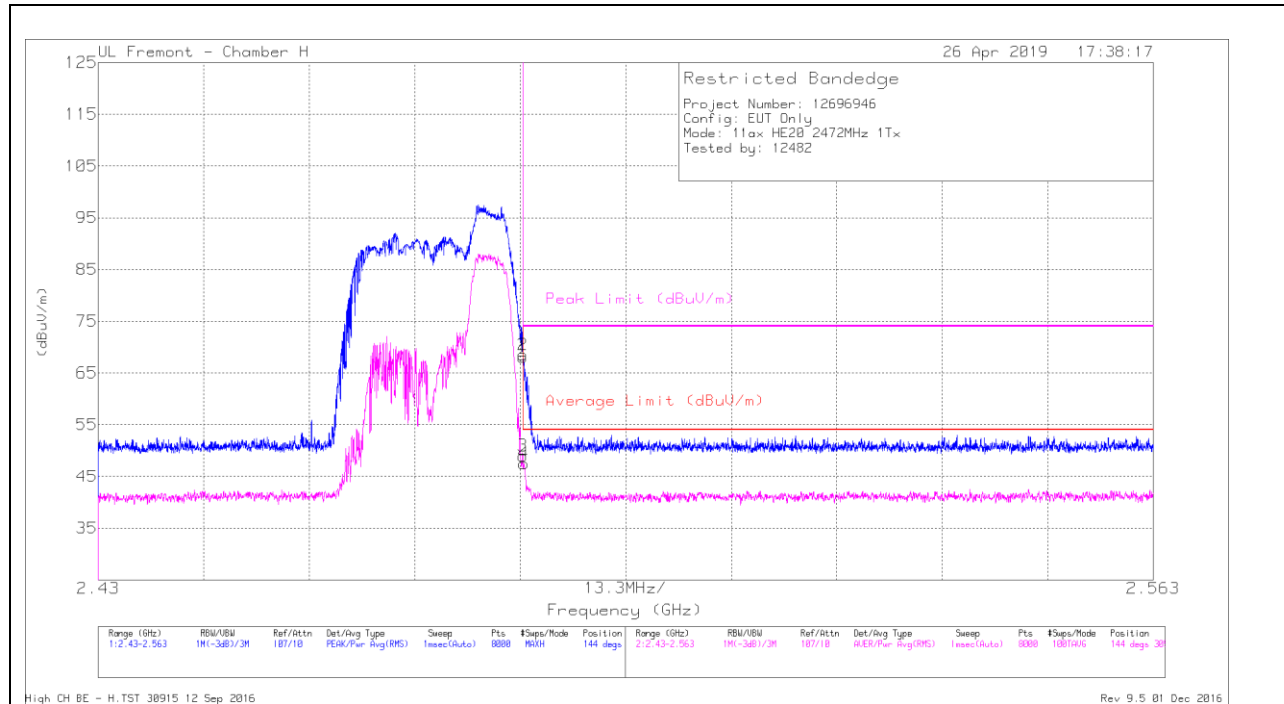BANDEDGE (HIGH CHANNEL, CH 13)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	59.06	Pk	32.3	-23.3	68.06	-	-	74	-5.94	144	305	H
2	* 2.484	59.51	Pk	32.3	-23.3	68.51	-	-	74	-5.49	144	305	H
3	* 2.484	39.96	RMS	32.3	-23.3	48.96	54	-5.04	-	-	144	305	H
4	* 2.484	38.53	RMS	32.3	-23.3	47.53	54	-6.47	-	-	144	305	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

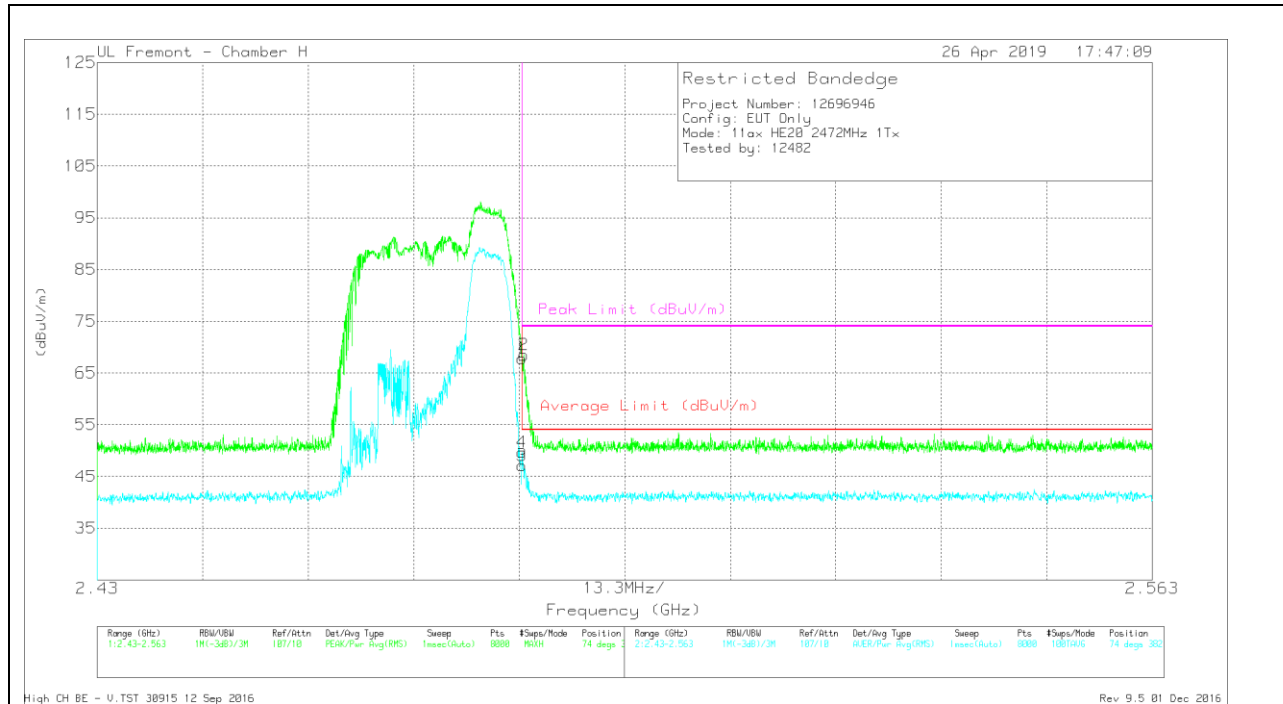


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	58.86	Pk	32.3	-23.3	67.86	-	-	74	-6.14	74	382	V
2	* 2.484	59.49	Pk	32.3	-23.3	68.49	-	-	74	-5.51	74	382	V
3	* 2.484	38.13	RMS	32.3	-23.3	47.13	54	-6.87	-	-	74	382	V
4	* 2.484	40.64	RMS	32.3	-23.3	49.64	54	-4.36	-	-	74	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

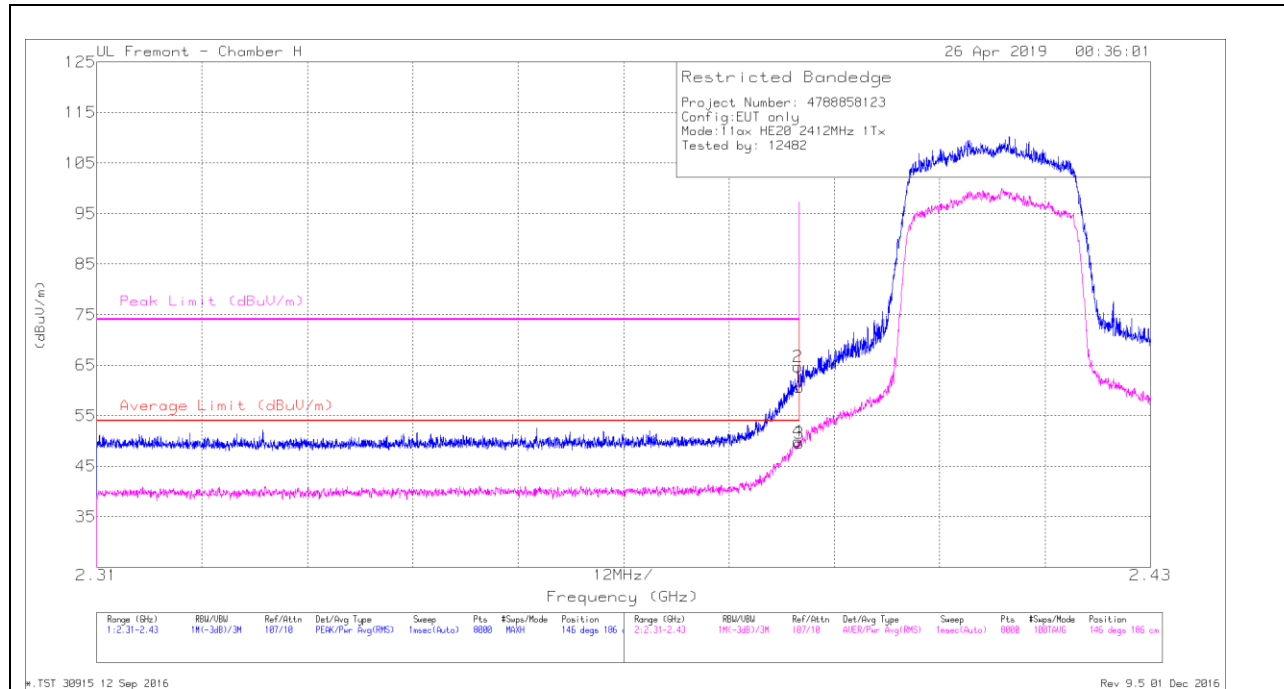ANTENNA 5, LEGACY SISO MODE: 242-Tones, RU Index 61**BANDEDGE (LOW CHANNEL, CH 1)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Fltr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	52.53	Pk	31.6	-23.5	60.63	-	-	74	-13.37	146	186	H
2	* 2.39	56.55	Pk	31.6	-23.5	64.65	-	-	74	-9.35	146	186	H
3	* 2.39	41.46	RMS	31.6	-23.5	49.56	54	-4.44	-	-	146	186	H
4	* 2.39	41.87	RMS	31.6	-23.5	49.97	54	-4.03	-	-	146	186	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

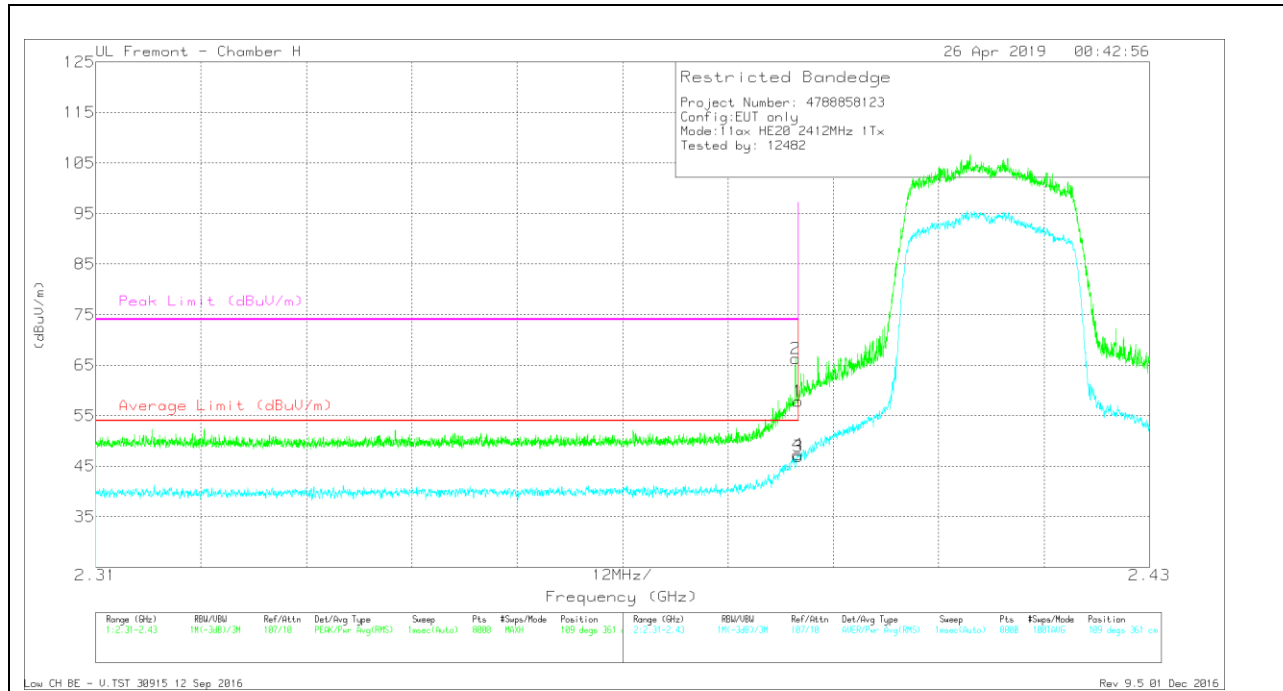


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.71	Pk	31.6	-23.5	57.81	-	-	74	-16.19	109	361	V
2	* 2.39	58.19	Pk	31.6	-23.5	66.29	-	-	74	-7.71	109	361	V
3	* 2.39	38.87	RMS	31.6	-23.5	46.97	54	-7.03	-	-	109	361	V
4	* 2.39	39.25	RMS	31.6	-23.5	47.35	54	-6.65	-	-	109	361	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

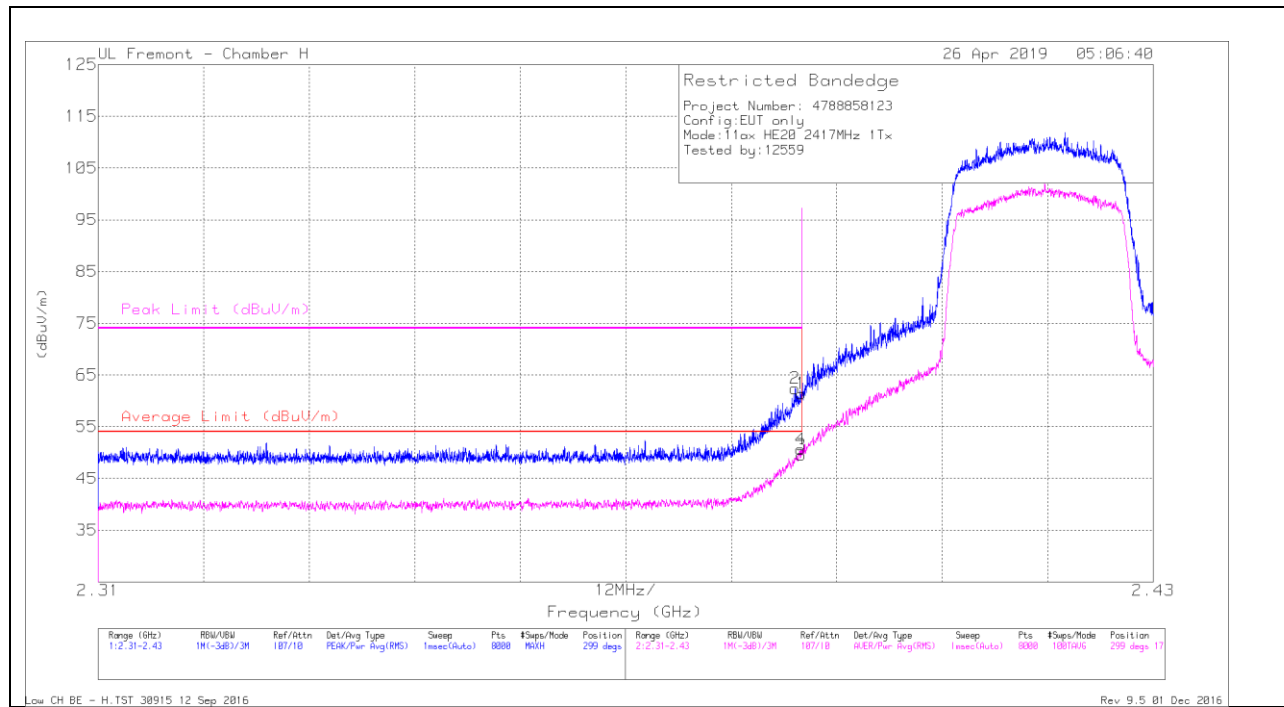BANDEDGE (LOW CHANNEL, CH 2)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.29	Pk	31.6	-23.5	61.39	-	-	74	-12.61	299	171	H
2	* 2.389	54.3	Pk	31.6	-23.5	62.4	-	-	74	-11.6	299	171	H
3	* 2.39	41.44	RMS	31.6	-23.5	49.54	54	-4.46	-	-	299	171	H
4	* 2.39	42.51	RMS	31.6	-23.5	50.61	54	-3.39	-	-	299	171	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

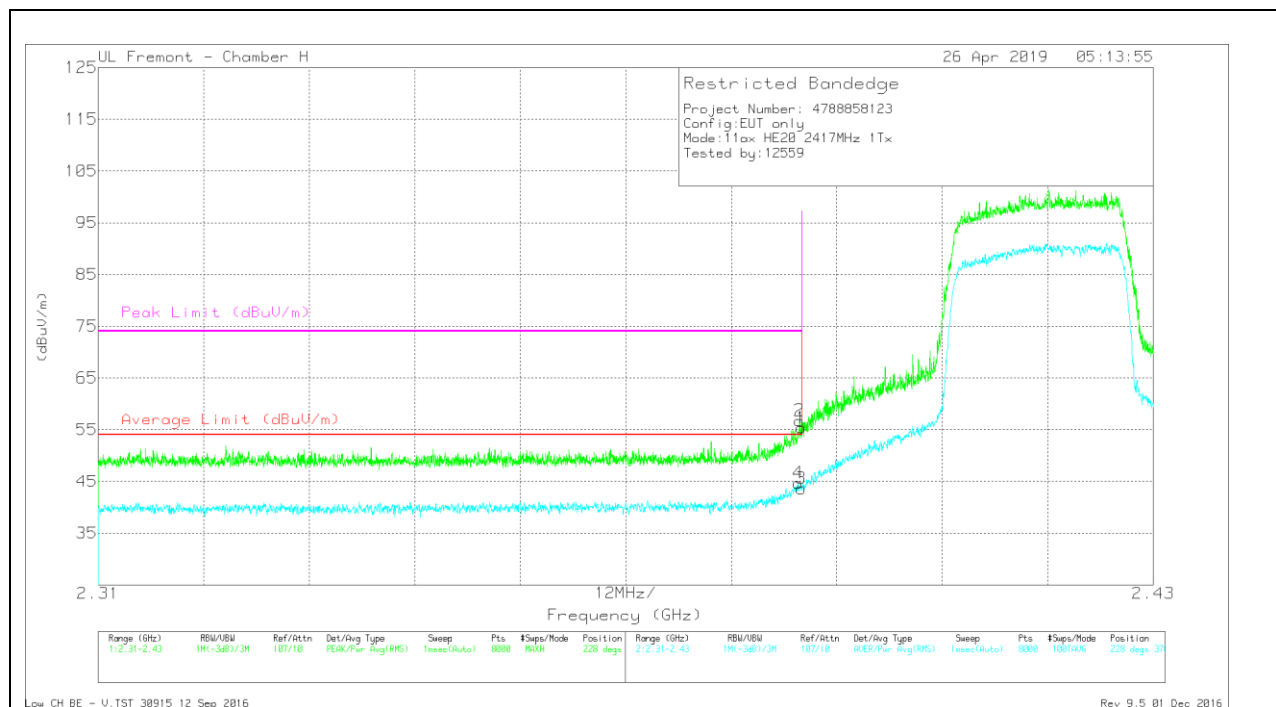

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	47.26	Pk	31.6	-23.5	55.36	-	-	74	-18.64	228	370	V
2	* 2.39	48.65	Pk	31.6	-23.5	56.75	-	-	74	-17.25	228	370	V
3	* 2.39	35.56	RMS	31.6	-23.5	43.66	54	-10.34	-	-	228	370	V
4	* 2.39	36.6	RMS	31.6	-23.5	44.7	54	-9.3	-	-	228	370	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

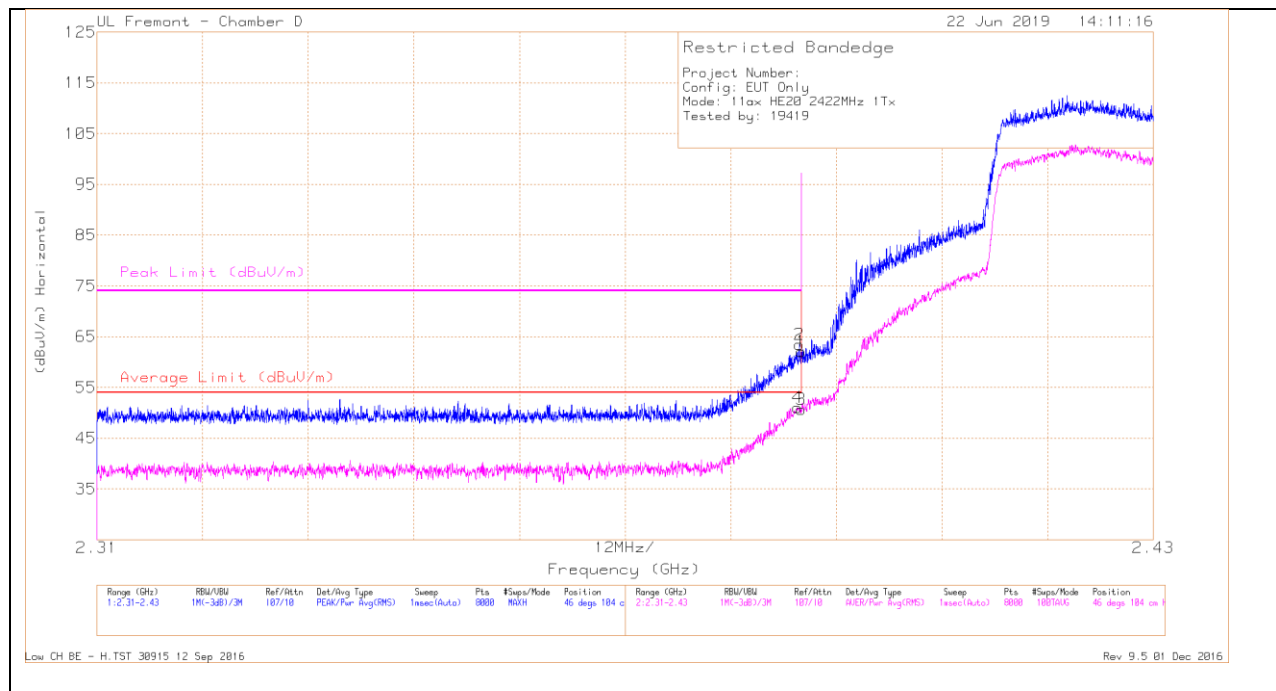


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	50.7	Pk	32	-20.6	62.1	-	-	74	-11.9	46	104	H
2	* 2.39	52.01	Pk	32	-20.6	63.41	-	-	74	-10.59	46	104	H
3	* 2.39	39.21	RMS	32	-20.6	50.61	54	-3.39	-	-	46	104	H
4	* 2.39	39.63	RMS	32	-20.6	51.03	54	-2.97	-	-	46	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

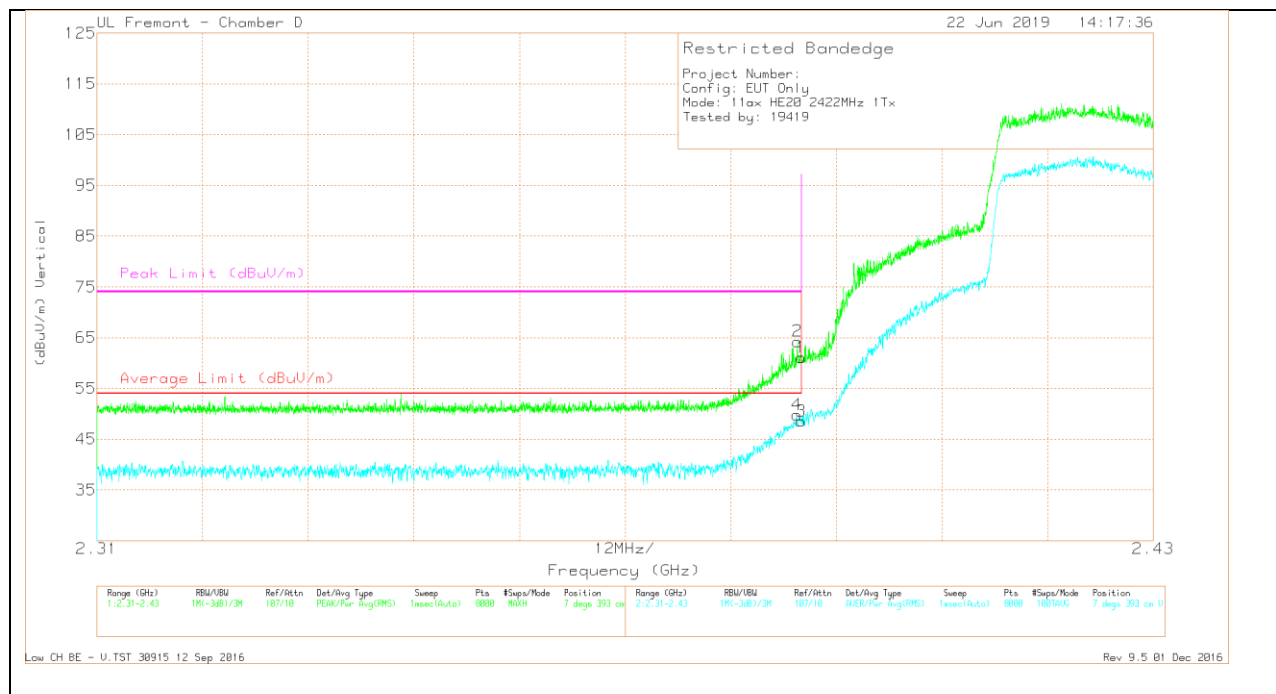


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Ampl/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.69	Pk	32	-20.6	61.09	-	-	74	-12.91	7	393	V
2	* 2.39	52.86	Pk	32	-20.6	64.26	-	-	74	-9.74	7	393	V
3	* 2.39	37.16	RMS	32	-20.6	48.56	54	-5.44	-	-	7	393	V
4	* 2.389	38.34	RMS	32	-20.6	49.74	54	-4.26	-	-	7	393	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

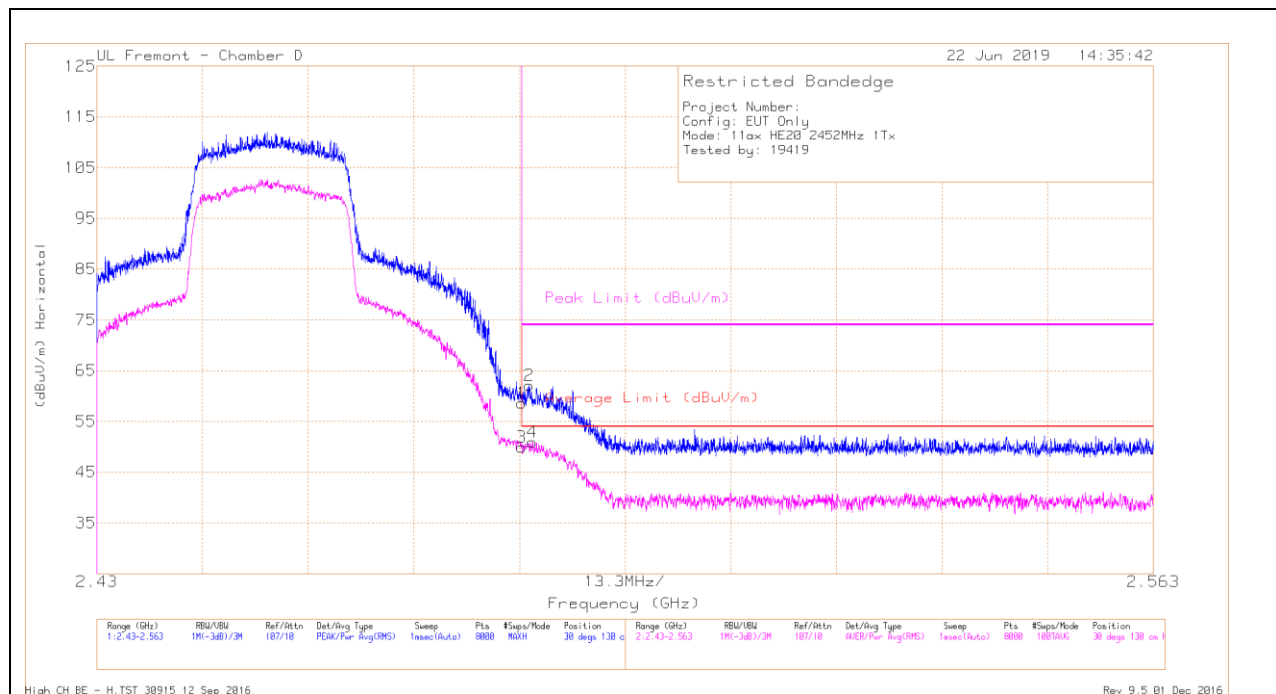BANDEDGE (HIGH CHANNEL, CH 9)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.85	Pk	32.4	-20.6	58.65	-	-	74	-15.35	30	130	H
2	* 2.484	50.38	Pk	32.3	-20.6	62.08	-	-	74	-11.92	30	130	H
3	* 2.484	38.07	RMS	32.4	-20.6	49.87	54	-4.13	-	-	30	130	H
4	* 2.485	39.17	RMS	32.3	-20.6	50.87	54	-3.13	-	-	30	130	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

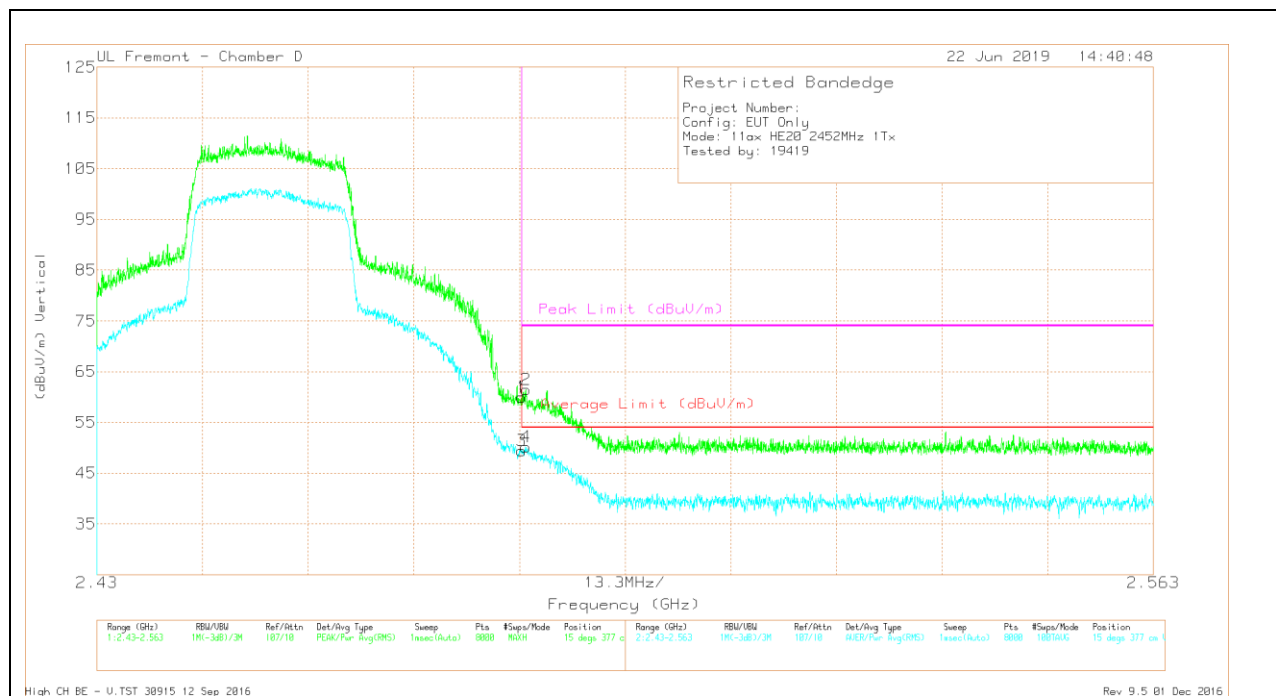


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.18	Pk	32.4	-20.6	59.98	-	-	74	-14.02	15	377	V
2	* 2.484	49.81	Pk	32.3	-20.6	61.51	-	-	74	-12.49	15	377	V
3	* 2.484	37.66	RMS	32.4	-20.6	49.46	54	-4.54	-	-	15	377	V
4	* 2.484	38.44	RMS	32.3	-20.6	50.14	54	-3.86	-	-	15	377	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

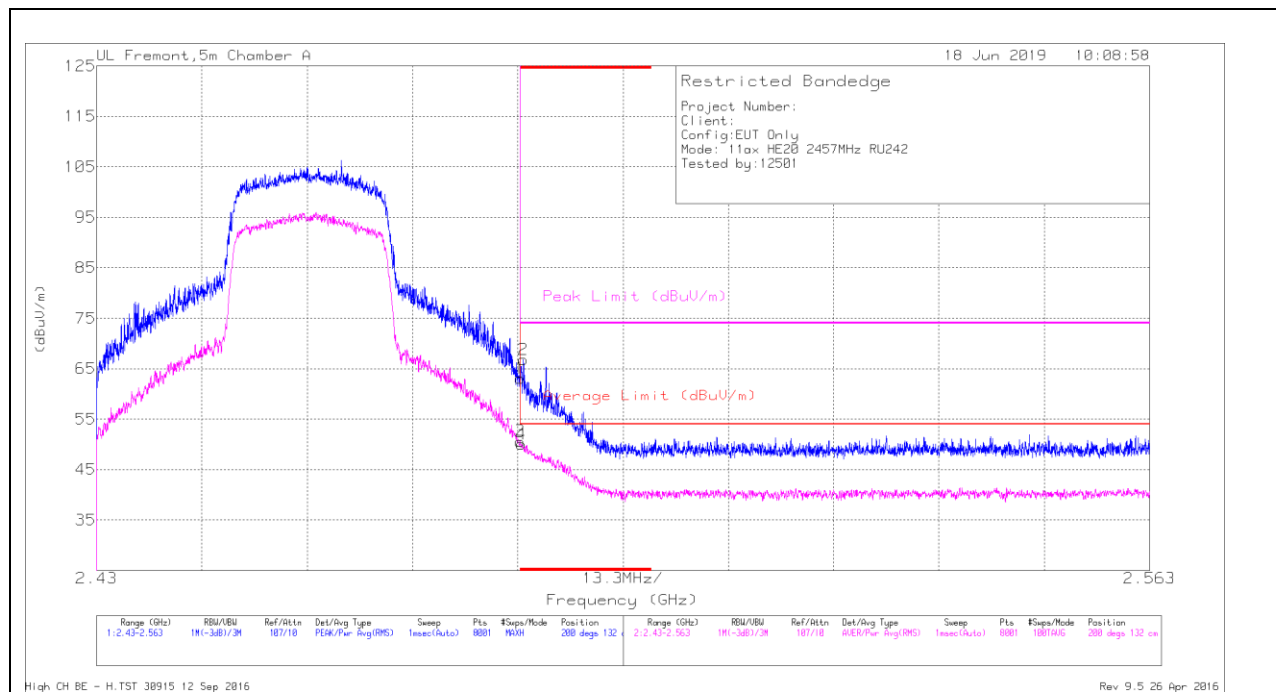BANDEDGE (HIGH CHANNEL, CH 10)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.21	Pk	32.6	-22.7	63.11	-	-	74	-10.89	200	132	H
2	* 2.484	56.86	Pk	32.6	-22.7	66.76	-	-	74	-7.24	200	132	H
3	* 2.484	40.7	RMS	32.6	-22.7	50.6	54	-3.4	-	-	200	132	H
4	* 2.484	40.12	RMS	32.6	-22.7	50.02	54	-3.98	-	-	200	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

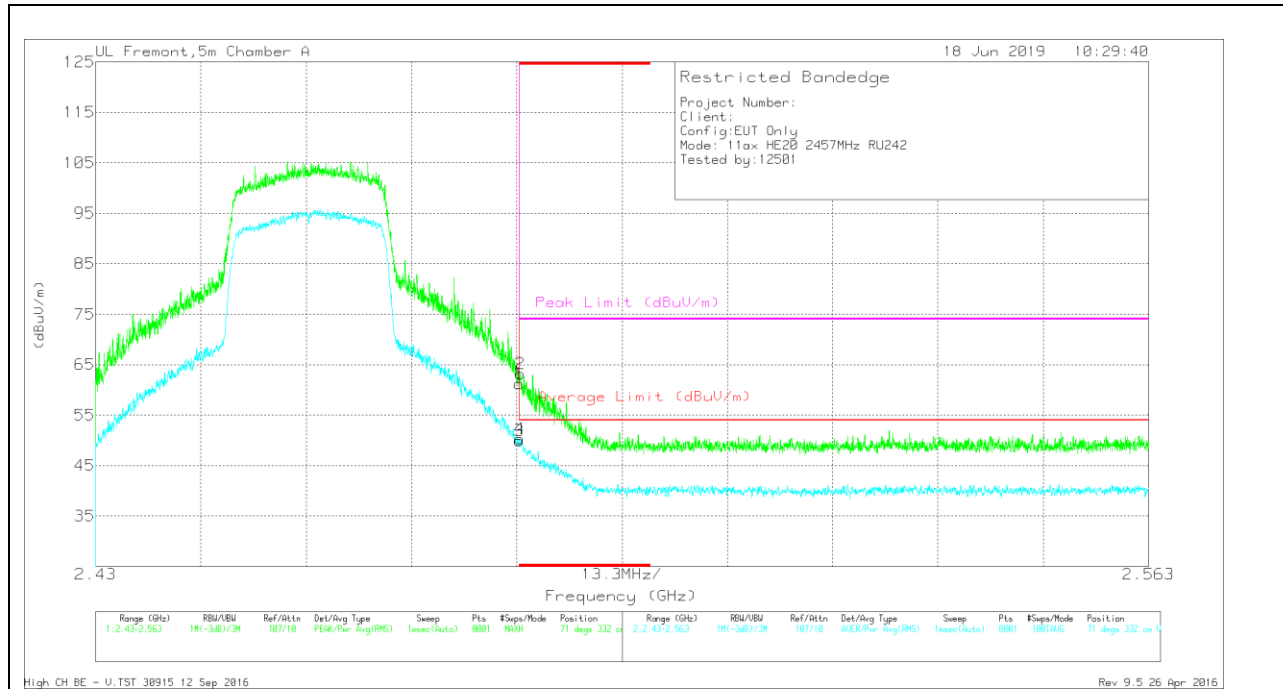

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.29	Pk	32.6	-22.7	61.19	-	-	74	-12.81	71	332	V
2	* 2.484	53.31	Pk	32.6	-22.7	63.21	-	-	74	-10.79	71	332	V
3	* 2.484	40.04	RMS	32.6	-22.7	49.94	54	-4.06	-	-	71	332	V
4	* 2.484	40.41	RMS	32.6	-22.7	50.31	54	-3.69	-	-	71	332	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

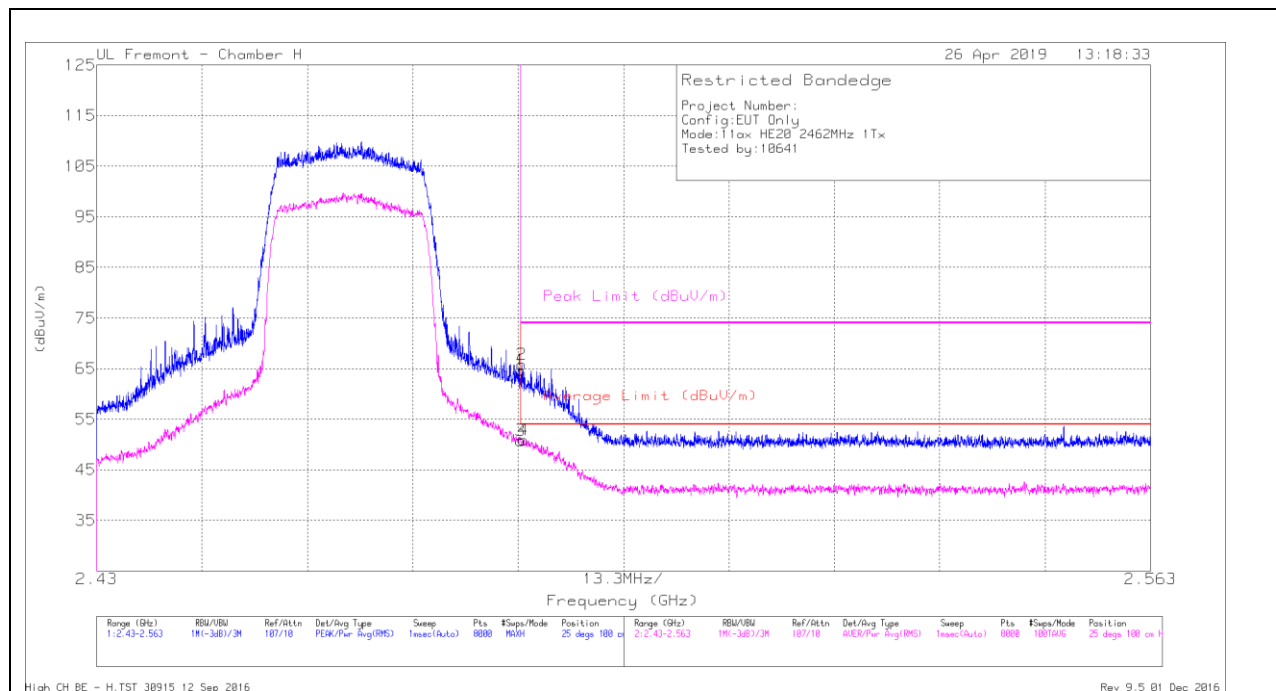


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.74	Pk	32.3	-23.3	64.74	-	-	74	-9.26	25	100	H
2	* 2.484	56.84	Pk	32.3	-23.3	65.84	-	-	74	-8.16	25	100	H
3	* 2.484	41.8	RMS	32.3	-23.3	50.8	54	-3.2	-	-	25	100	H
4	* 2.484	41.93	RMS	32.3	-23.3	50.93	54	-3.07	-	-	25	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

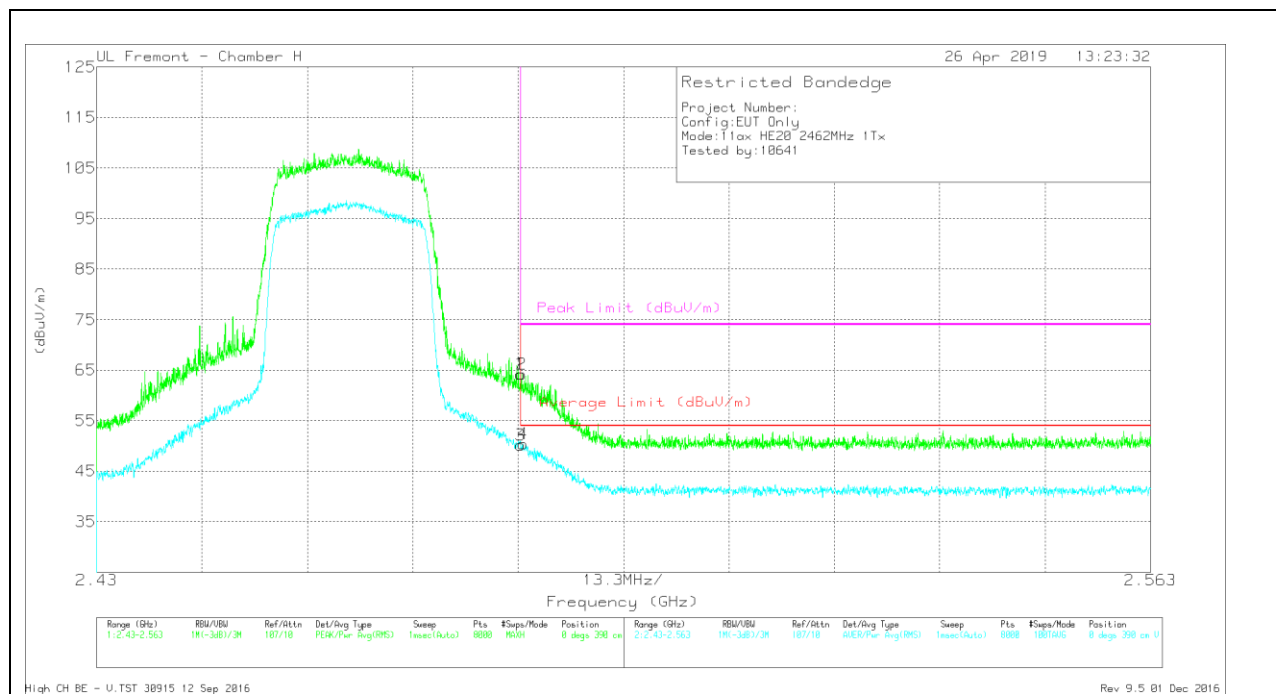

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.15	Pk	32.3	-23.3	64.15	-	-	74	-9.85	0	390	V
2	* 2.484	55.21	Pk	32.3	-23.3	64.21	-	-	74	-9.79	0	390	V
3	* 2.484	41.18	RMS	32.3	-23.3	50.18	54	-3.82	-	-	0	390	V
4	* 2.484	41.4	RMS	32.3	-23.3	50.4	54	-3.6	-	-	0	390	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

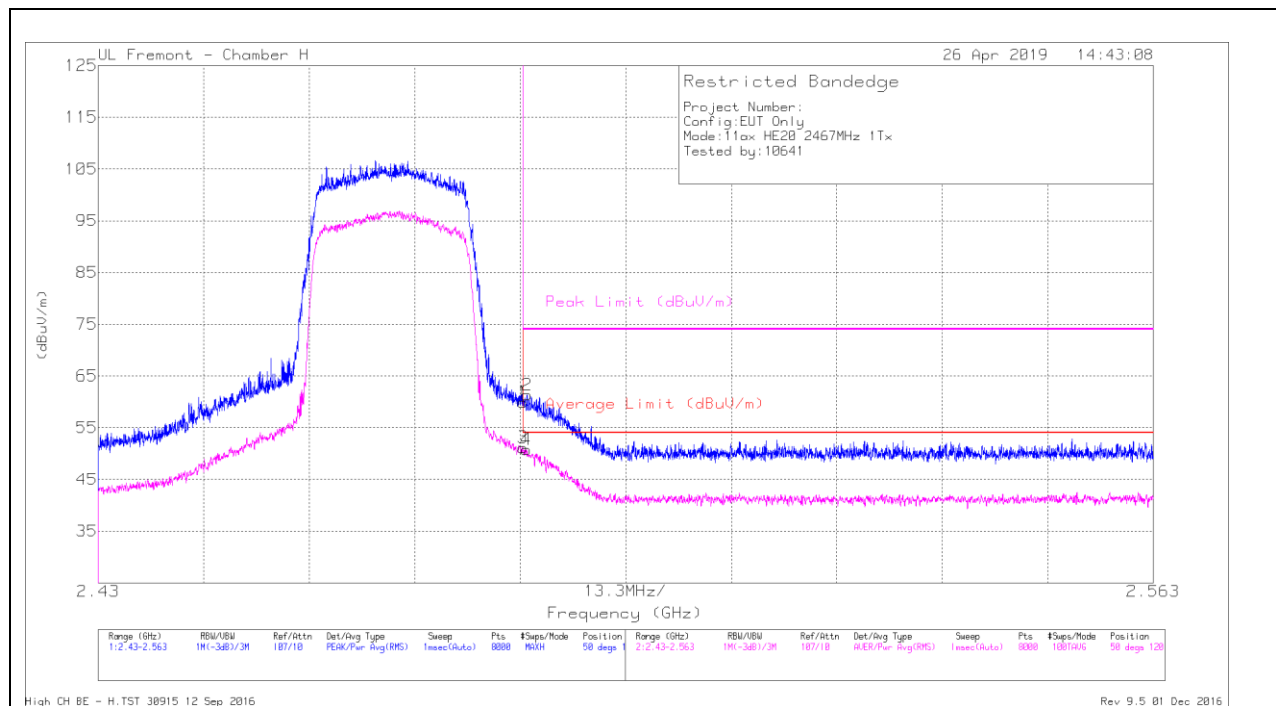


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.95	Pk	32.3	-23.3	59.95	-	-	74	-14.05	50	120	H
2	* 2.484	52.32	Pk	32.3	-23.3	61.32	-	-	74	-12.68	50	120	H
3	* 2.484	42.17	RMS	32.3	-23.3	51.17	54	-2.83	-	-	50	120	H
4	* 2.484	41.78	RMS	32.3	-23.3	50.78	54	-3.22	-	-	50	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

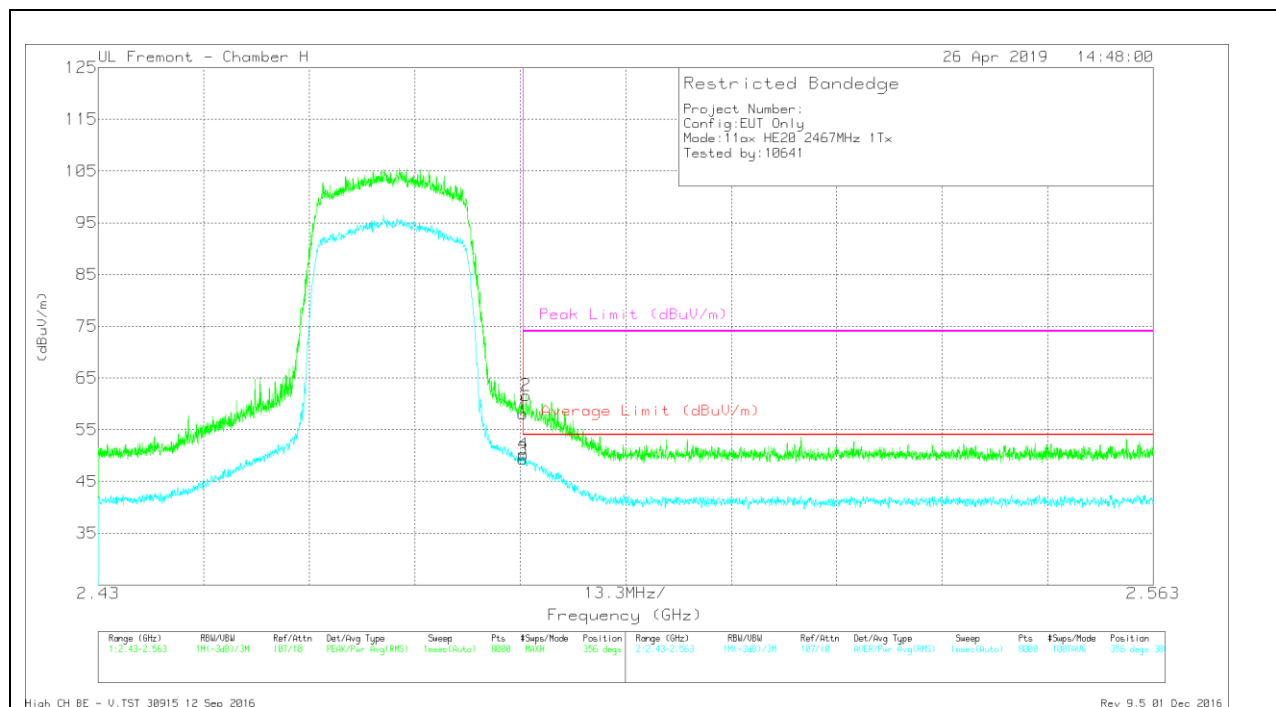

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.07	Pk	32.3	-23.3	58.07	-	-	74	-15.93	356	380	V
2	* 2.484	52.63	Pk	32.3	-23.3	61.63	-	-	74	-12.37	356	380	V
3	* 2.484	40.31	RMS	32.3	-23.3	49.31	54	-4.69	-	-	356	380	V
4	* 2.484	41.23	RMS	32.3	-23.3	50.23	54	-3.77	-	-	356	380	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

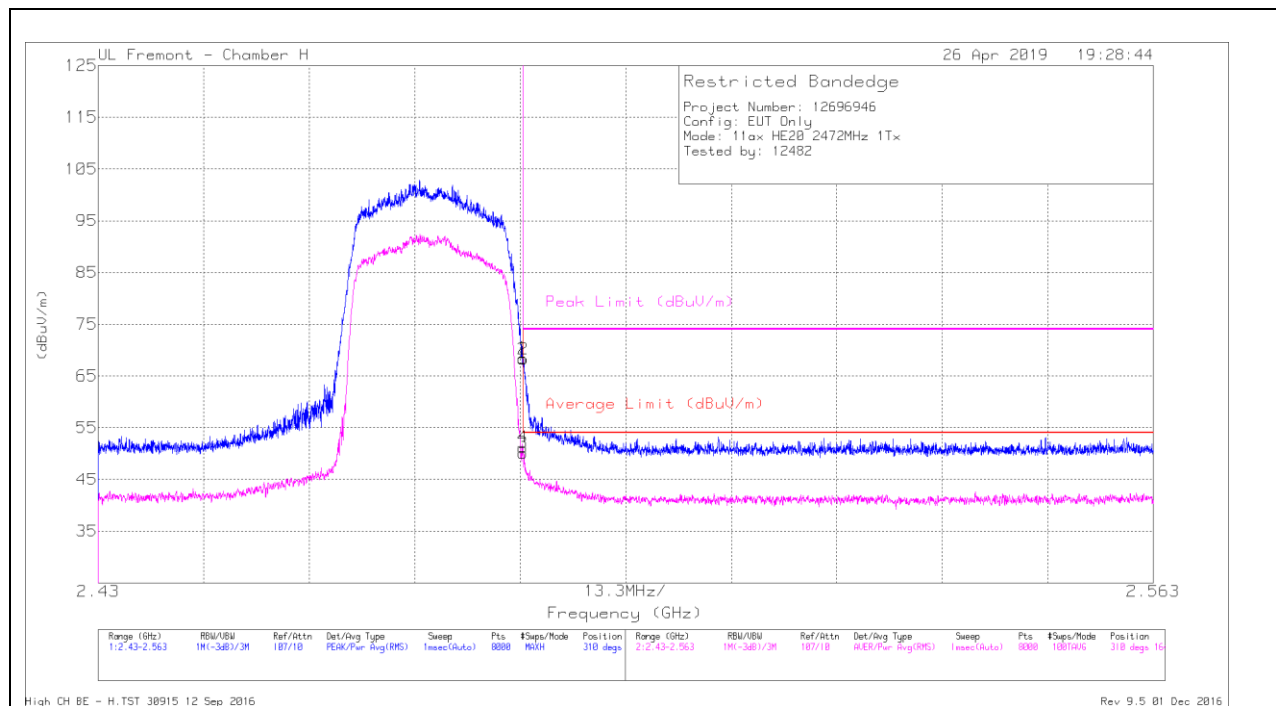


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	59.43	Pk	32.3	-23.3	68.43	-	-	74	-5.57	310	164	H
2	* 2.484	59.26	Pk	32.3	-23.3	68.26	-	-	74	-5.74	310	164	H
3	* 2.484	41.12	RMS	32.3	-23.3	50.12	54	-3.88	-	-	310	164	H
4	* 2.484	42.18	RMS	32.3	-23.3	51.18	54	-2.82	-	-	310	164	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

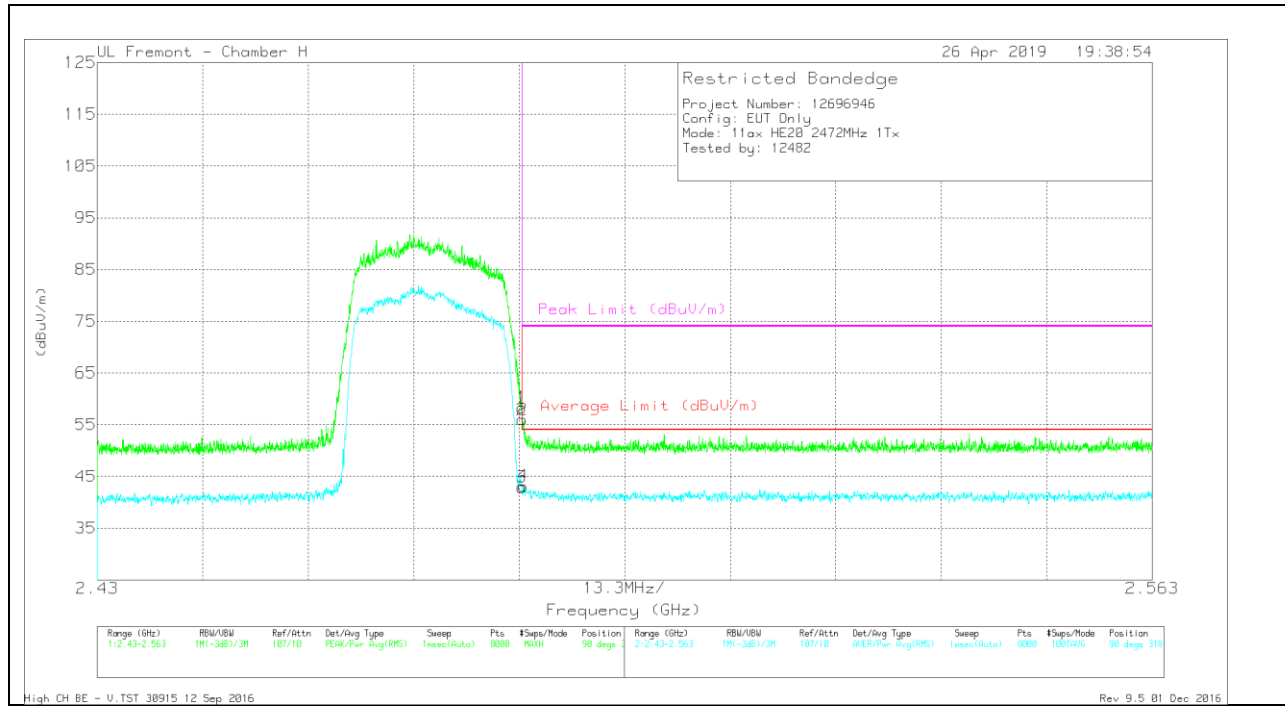

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.31	Pk	32.3	-23.3	58.31	-	-	74	-15.69	90	318	V
2	* 2.484	46.99	Pk	32.3	-23.3	55.99	-	-	74	-18.01	90	318	V
3	* 2.484	33.94	RMS	32.3	-23.3	42.94	54	-11.06	-	-	90	318	V
4	* 2.484	34.16	RMS	32.3	-23.3	43.16	54	-10.84	-	-	90	318	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

9.1.5. TX ABOVE 1 GHz 802.11ax HE20 OFDMA MODE IN THE 2.4 GHz BAND

2TX ANTENNA 2 + ANTENNA 5 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

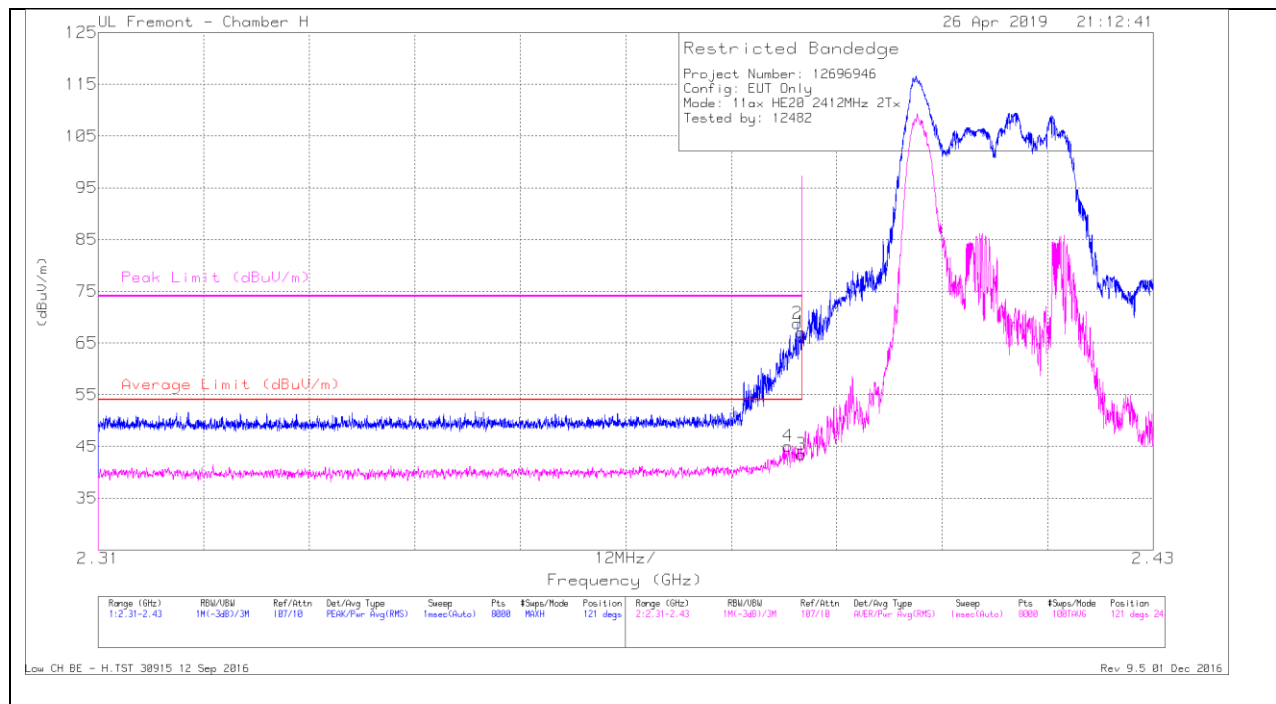


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtri/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	59.03	Pk	31.6	-23.5	67.13	-	-	74	-6.87	121	243	H
2	* 2.39	60.72	Pk	31.6	-23.5	68.82	-	-	74	-5.18	121	243	H
3	* 2.39	35.37	RMS	31.6	-23.5	43.47	54	-10.53	-	-	121	243	H
4	* 2.388	36.98	RMS	31.6	-23.5	45.08	54	-8.92	-	-	121	243	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

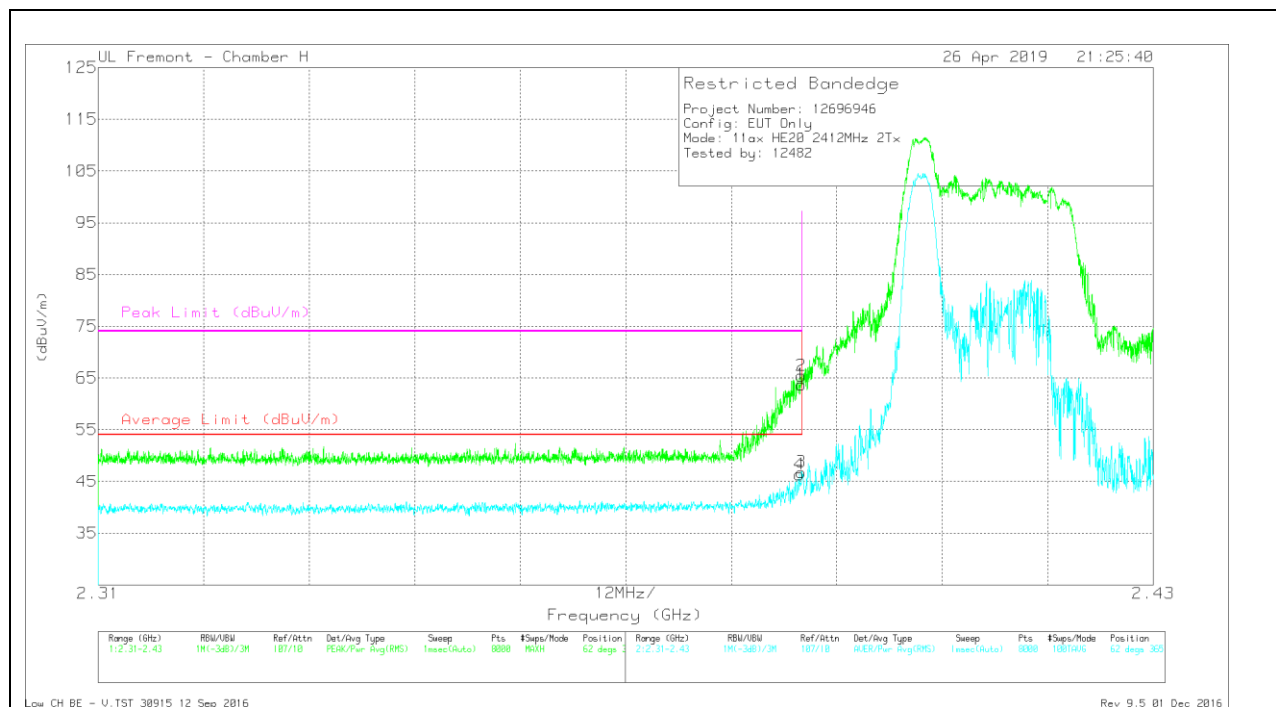


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.63	Pk	31.6	-23.5	63.73	-	-	74	-10.27	62	365	V
2	* 2.39	57.34	Pk	31.6	-23.5	65.44	-	-	74	-8.56	62	365	V
3	* 2.39	38.71	RMS	31.6	-23.5	46.81	54	-7.19	-	-	62	365	V
4	* 2.39	38.24	RMS	31.6	-23.5	46.34	54	-7.66	-	-	62	365	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

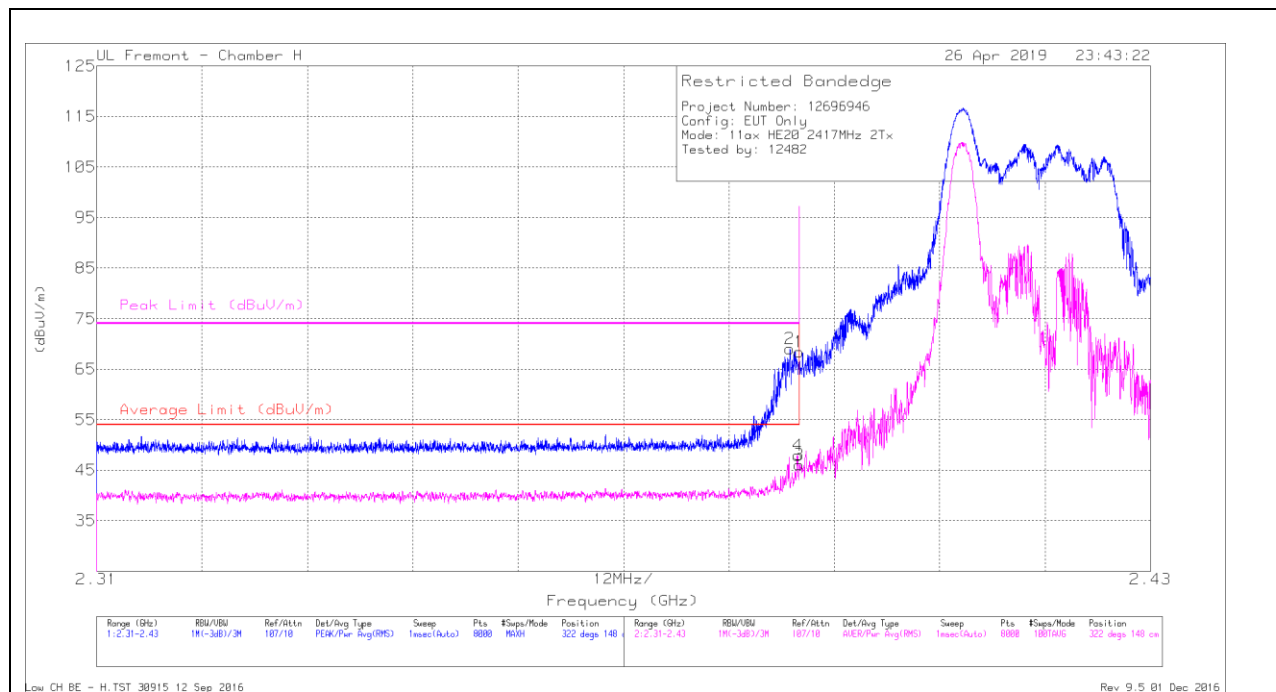BANDEDGE (LOW CHANNEL, CH 2)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.33	Pk	31.6	-23.5	68.43	-	-	74	-5.57	322	148	H
2	* 2.389	60.92	Pk	31.6	-23.5	69.02	-	-	74	-4.98	322	148	H
3	* 2.39	37.98	RMS	31.6	-23.5	46.08	54	-7.92	-	-	322	148	H
4	* 2.39	39.85	RMS	31.6	-23.5	47.95	54	-6.05	-	-	322	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

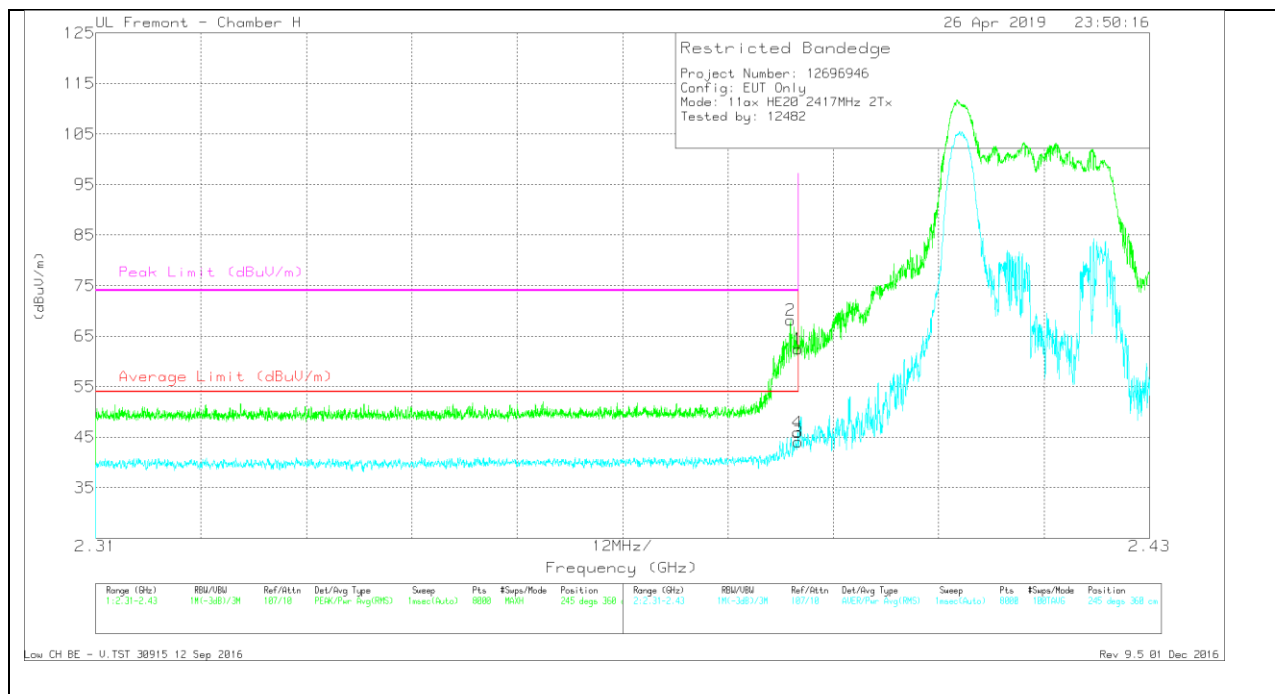

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.36	Pk	31.6	-23.5	62.46	-	-	74	-11.54	245	360	V
2	* 2.389	60.02	Pk	31.6	-23.5	68.12	-	-	74	-5.88	245	360	V
3	* 2.39	36.01	RMS	31.6	-23.5	44.11	54	-9.89	-	-	245	360	V
4	* 2.39	37.88	RMS	31.6	-23.5	45.98	54	-8.02	-	-	245	360	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

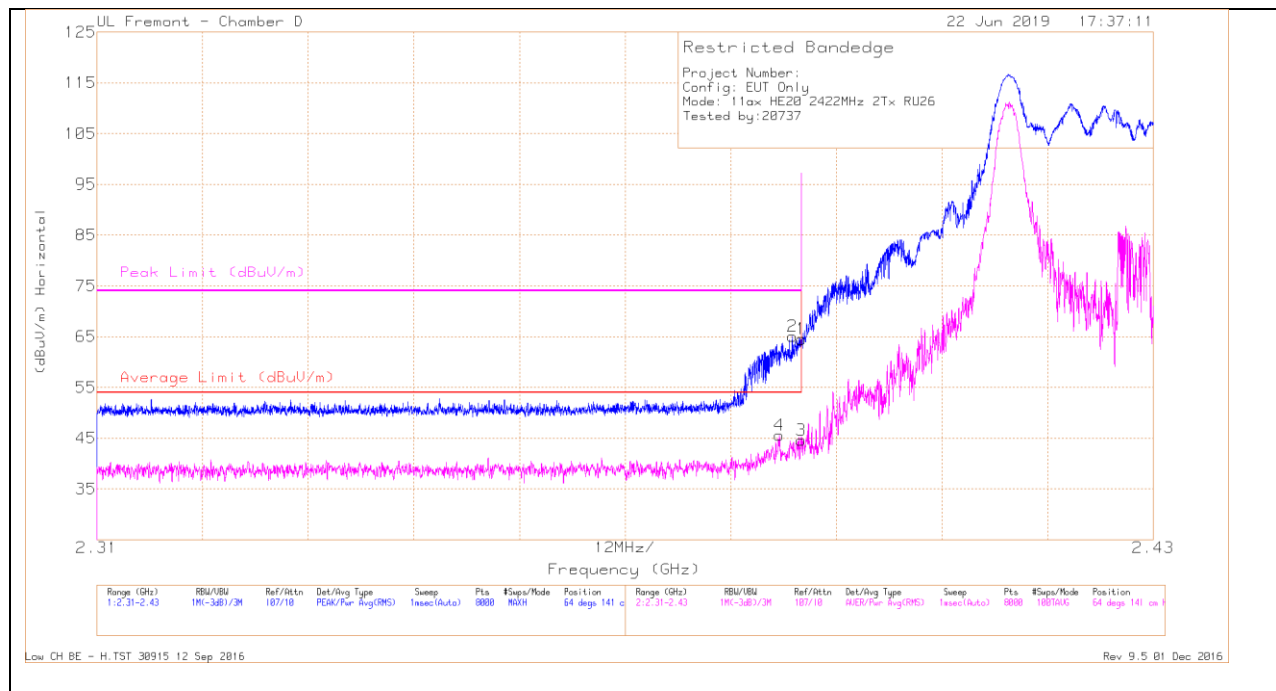


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Chl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.11	Pk	32	-20.6	64.51	-	-	74	-9.49	64	141	H
2	* 2.389	53.66	Pk	32	-20.6	65.06	-	-	74	-8.94	64	141	H
3	* 2.39	33.21	RMS	32	-20.6	44.61	54	-9.39	-	-	64	141	H
4	* 2.388	34.22	RMS	32	-20.6	45.62	54	-8.38	-	-	64	141	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

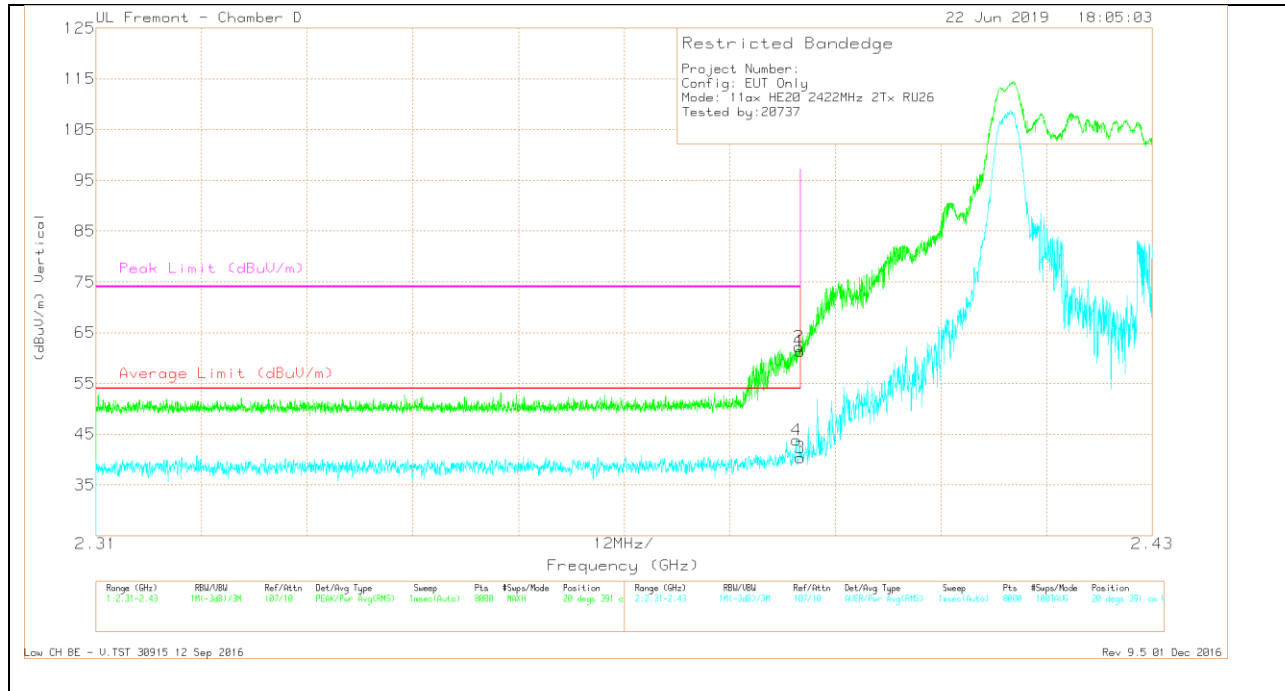


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.99	Pk	32	-20.6	61.39	-	-	74	-12.61	20	391	V
2	* 2.39	50.78	Pk	32	-20.6	62.18	-	-	74	-11.82	20	391	V
3	* 2.39	28.98	RMS	32	-20.6	40.38	54	-13.62	-	-	20	391	V
4	* 2.39	32.46	RMS	32	-20.6	43.86	54	-10.14	-	-	20	391	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

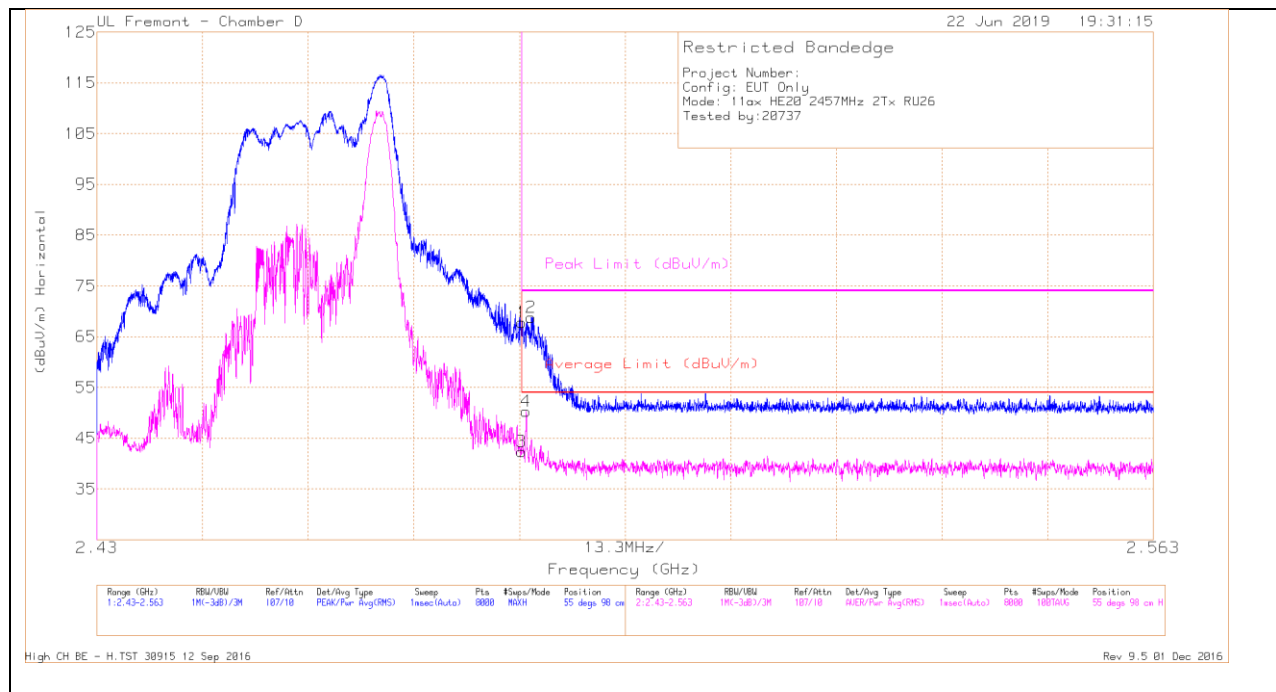BANDEDGE (HIGH CHANNEL, CH 10)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	56.02	Pk	32.4	-20.6	67.82	-	-	74	-6.18	55	98	H
2	* 2.485	57.13	Pk	32.3	-20.6	68.83	-	-	74	-5.17	55	98	H
3	* 2.484	30.59	RMS	32.4	-20.6	42.39	54	-11.61	-	-	55	98	H
4	* 2.484	38.6	RMS	32.3	-20.6	50.3	54	-3.7	-	-	55	98	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

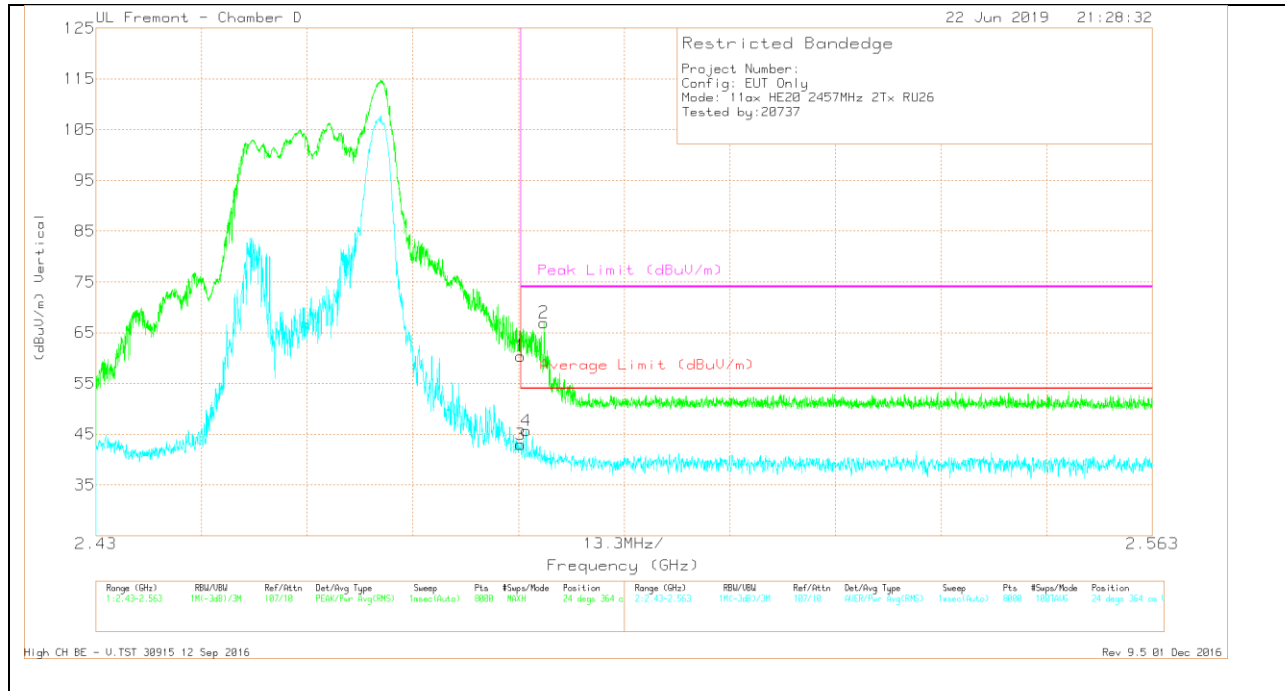


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.61	Pk	32.4	-20.6	60.41	-	-	74	-13.59	24	364	V
2	* 2.486	55.29	Pk	32.3	-20.6	66.99	-	-	74	-7.01	24	364	V
3	* 2.484	31.12	RMS	32.4	-20.6	42.92	54	-11.08	-	-	24	364	V
4	* 2.484	33.95	RMS	32.3	-20.6	45.65	54	-8.35	-	-	24	364	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

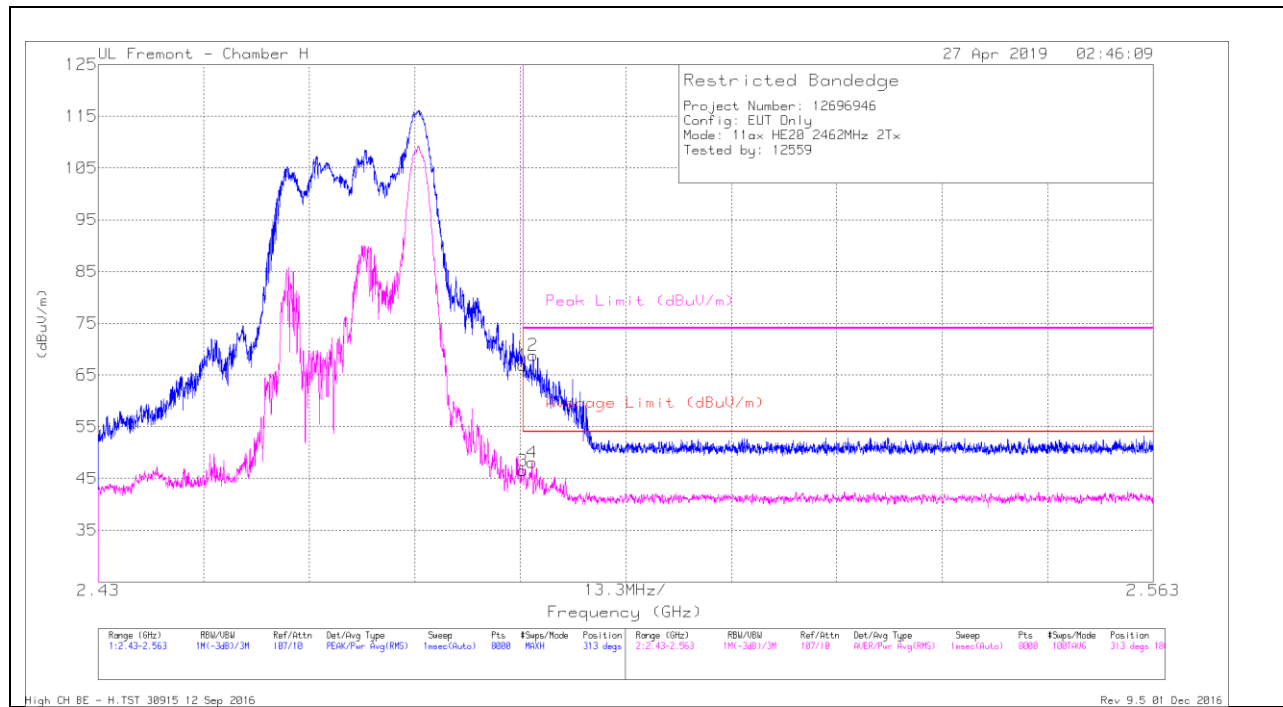BANEDGE (HIGH CHANNEL, CH 11)**HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	57.89	Pk	32.3	-23.3	66.89	-	-	74	-7.11	313	186	H
2	* 2.485	59.79	Pk	32.3	-23.3	68.79	-	-	74	-5.21	313	186	H
3	* 2.484	37.48	RMS	32.3	-23.3	46.48	54	-7.52	-	-	313	186	H
4	* 2.485	39.08	RMS	32.3	-23.3	48.08	54	-5.92	-	-	313	186	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

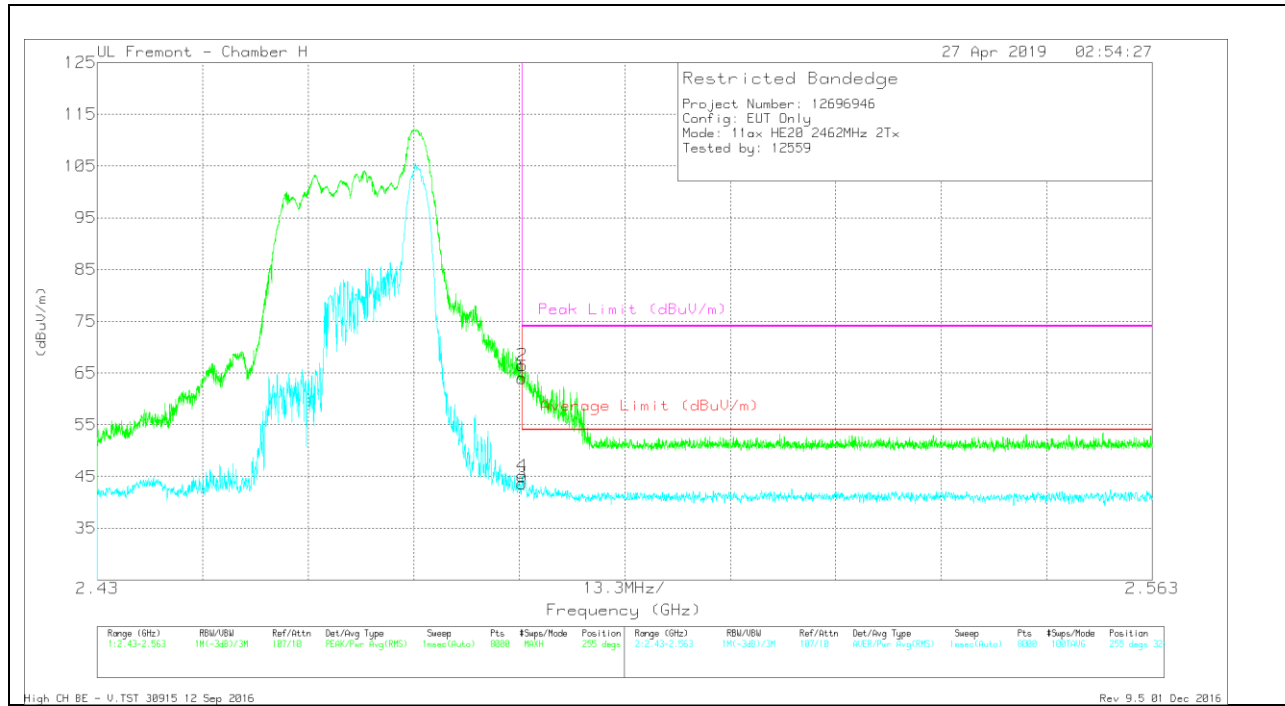

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	54.97	Pk	32.3	-23.3	63.97	-	-	74	-10.03	255	324	V
2	* 2.484	57.48	Pk	32.3	-23.3	66.48	-	-	74	-7.52	255	324	V
3	* 2.484	34.66	RMS	32.3	-23.3	43.66	54	-10.34	-	-	255	324	V
4	* 2.484	36.12	RMS	32.3	-23.3	45.12	54	-8.88	-	-	255	324	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

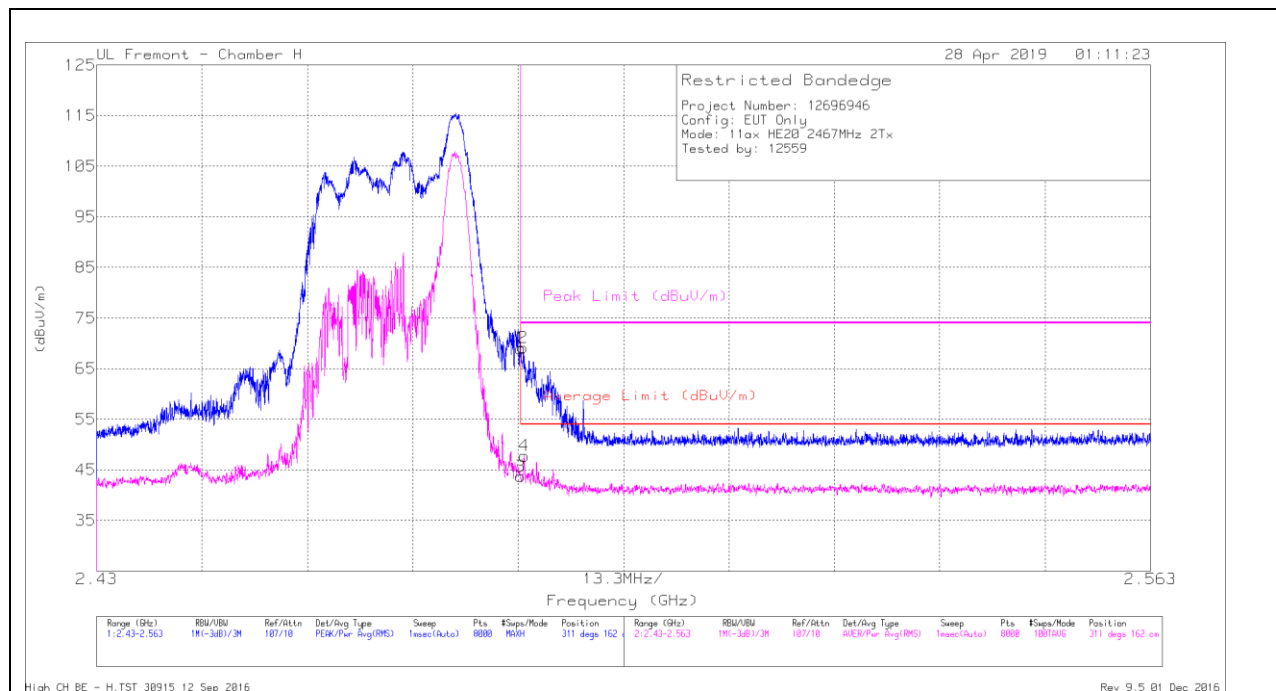


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT136 (dB/m)	Amp/Cb/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	59.98	Pk	32.3	-23.3	68.98	-	-	74	-5.02	311	162	H
2	* 2.484	60.2	Pk	32.3	-23.3	69.2	-	-	74	-4.8	311	162	H
3	* 2.484	34.71	RMS	32.3	-23.3	43.71	54	-10.29	-	-	311	162	H
4	* 2.484	38.75	RMS	32.3	-23.3	47.75	54	-6.25	-	-	311	162	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

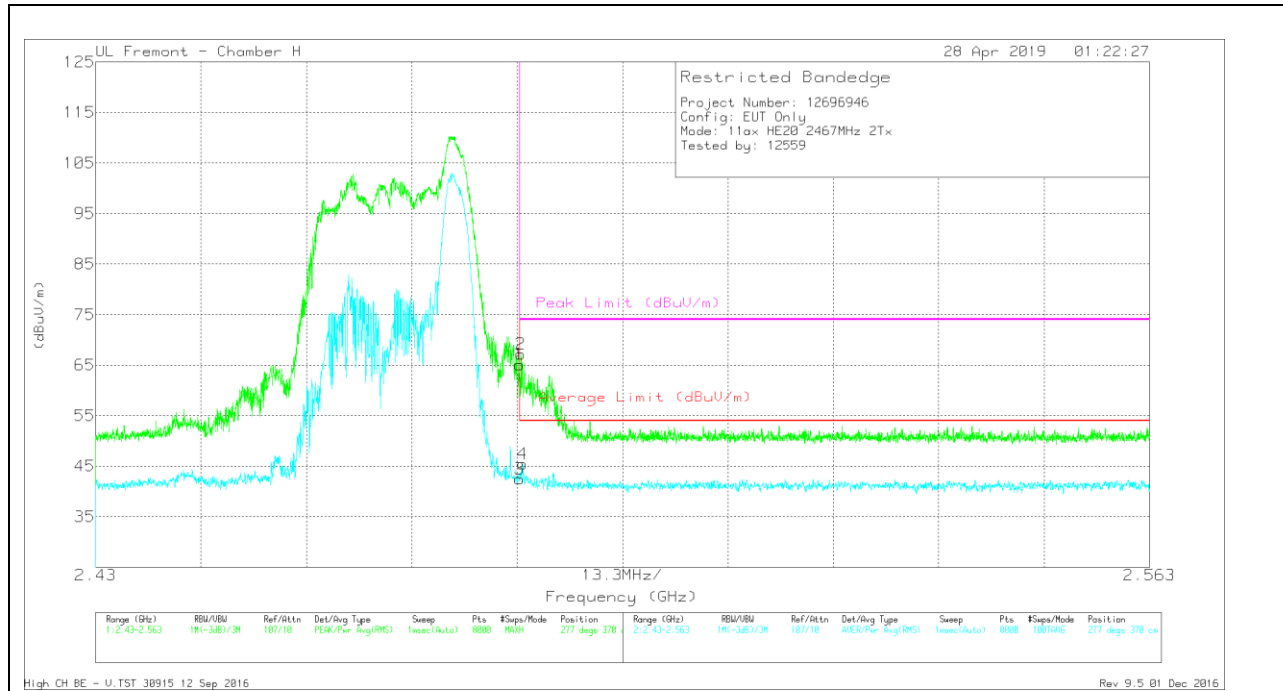

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	56.13	Pk	32.3	-23.3	65.13	-	-	74	-8.87	277	370	V
2	* 2.484	58.16	Pk	32.3	-23.3	67.16	-	-	74	-6.84	277	370	V
3	* 2.484	33.42	RMS	32.3	-23.3	42.42	54	-11.58	-	-	277	370	V
4	* 2.484	36.44	RMS	32.3	-23.3	45.44	54	-8.56	-	-	277	370	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

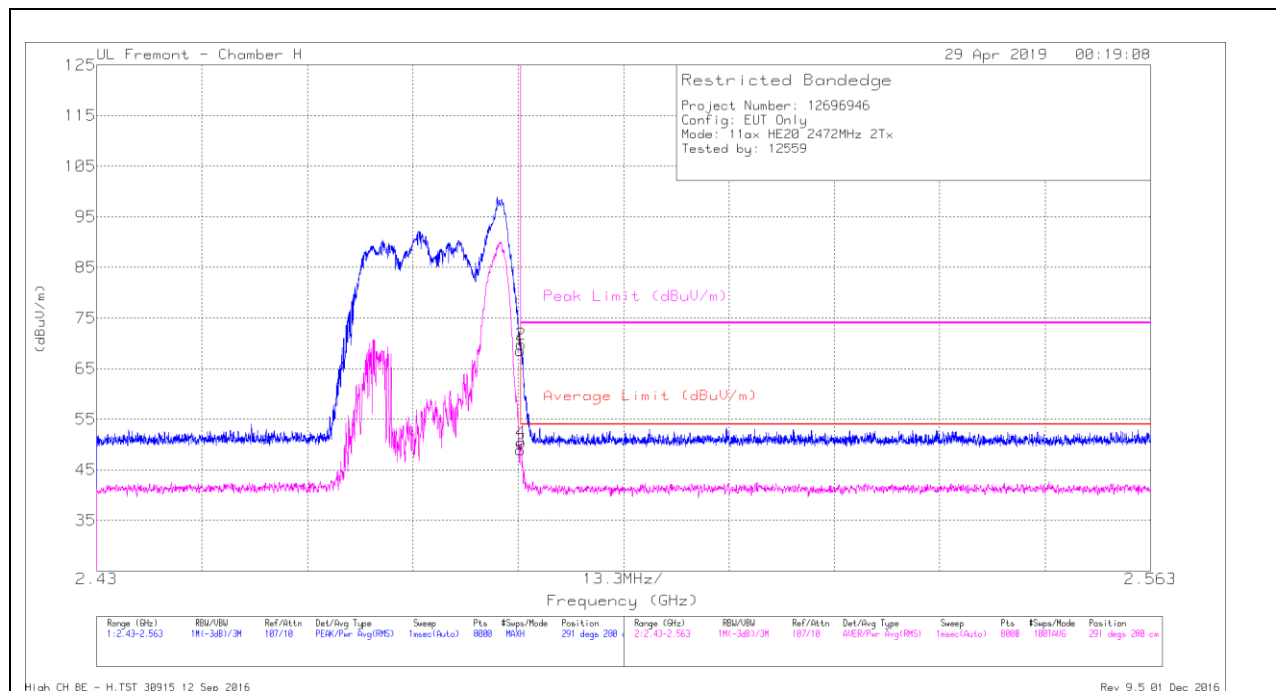


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	59.6	Pk	32.3	-23.3	68.6	-	-	74	-5.4	291	280	H
2	* 2.484	60.83	Pk	32.3	-23.3	69.83	-	-	74	-4.17	291	280	H
3	* 2.484	39.9	RMS	32.3	-23.3	48.9	54	-5.1	-	-	291	280	H
4	* 2.484	41.44	RMS	32.3	-23.3	50.44	54	-3.56	-	-	291	280	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


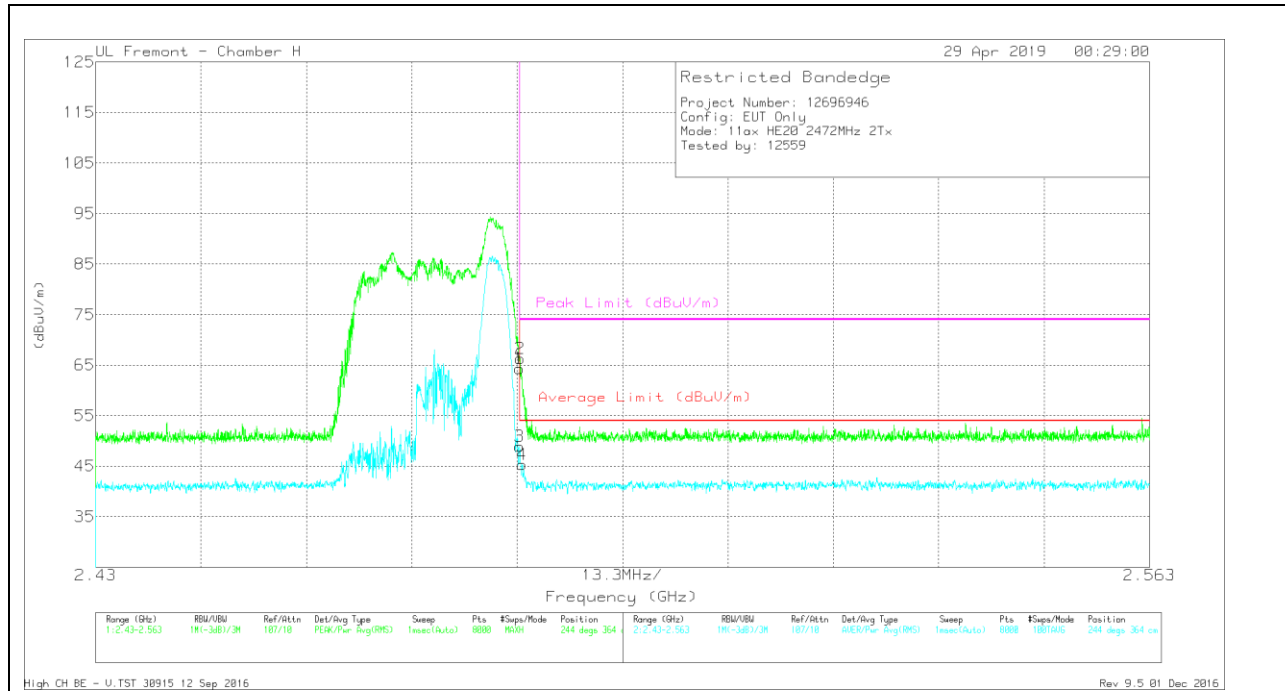


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.36	Pk	32.3	-23.3	64.36	-	-	74	-9.64	244	364	V
2	* 2.484	57.36	Pk	32.3	-23.3	66.36	-	-	74	-7.64	244	364	V
3	* 2.484	39.93	RMS	32.3	-23.3	48.93	54	-5.07	-	-	244	364	V
4	* 2.484	36.3	RMS	32.3	-23.3	45.3	54	-8.7	-	-	244	364	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

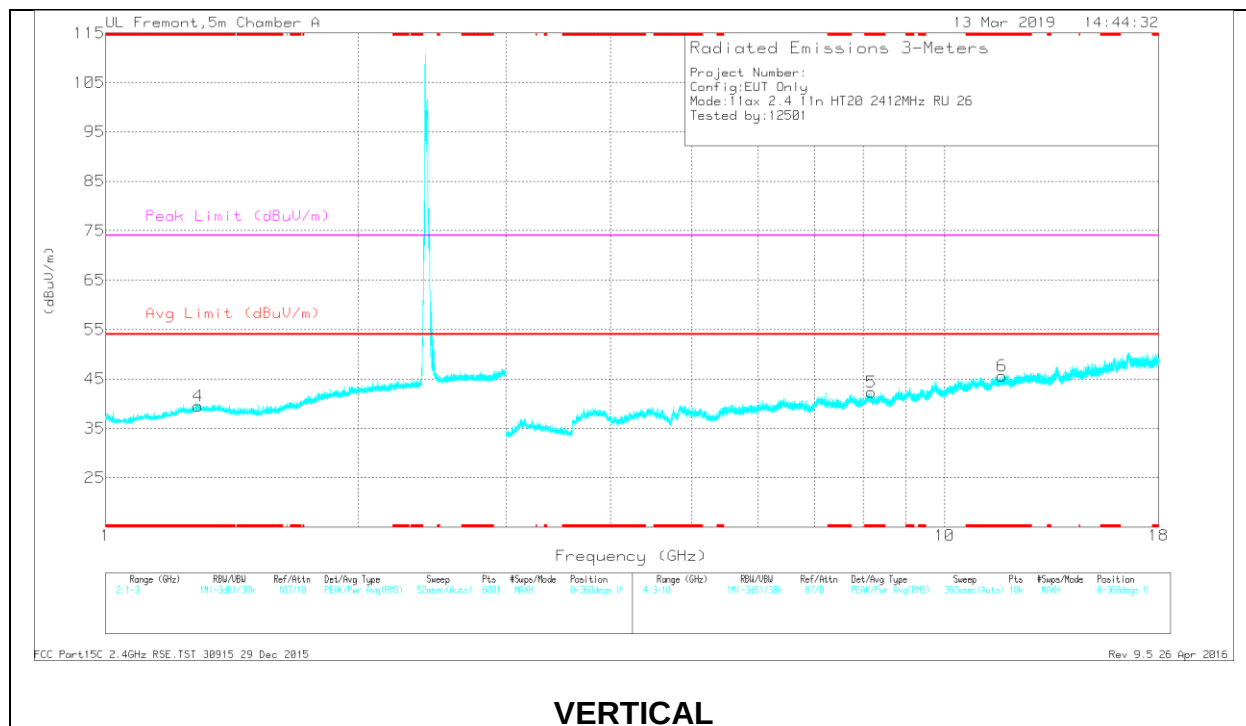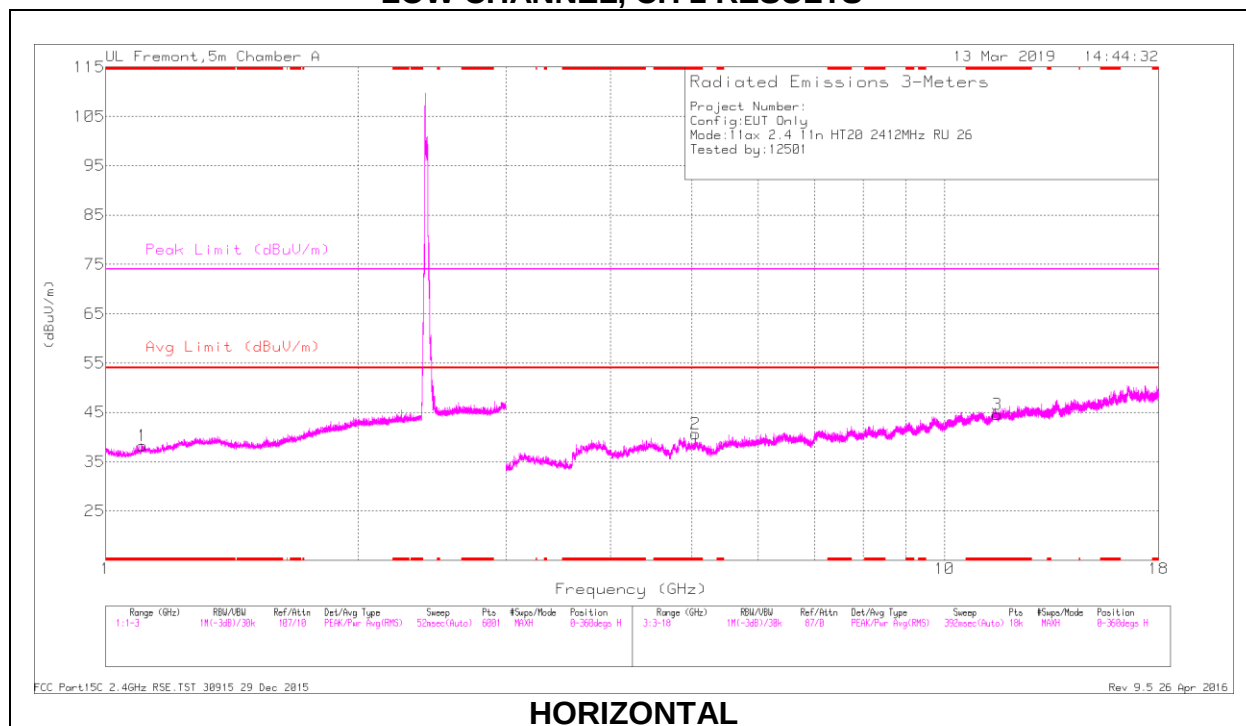HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL, CH 1 RESULTS**

RADIATED EMISSIONS

Radiated Emissions

Markers	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.106	42.78	PK2	27.7	-25.3	45.18	-	-	74	-28.82	121	107	H
	* 1.105	31.89	MAv1	27.7	-25.3	34.29	54	-19.71	-	-	121	107	H
2	* 5.049	39.42	PK2	34.2	-28.2	45.42	-	-	74	-28.58	166	310	H
	* 5.051	29.58	MAv1	34.2	-28.2	35.58	54	-18.42	-	-	166	310	H
3	* 11.556	33.3	PK2	38.3	-20.2	51.4	-	-	74	-22.6	205	119	H
	* 11.555	23.6	MAv1	38.3	-20.2	41.7	54	-12.3	-	-	205	119	H
4	* 1.289	42.98	PK2	29.1	-24.9	47.18	-	-	74	-26.82	37	189	V
	* 1.29	31.83	MAv1	29.1	-24.9	36.03	54	-17.97	-	-	37	189	V
5	* 8.18	34.96	PK2	35.9	-22.4	48.46	-	-	74	-25.54	216	233	V
	* 8.179	24.46	MAv1	35.9	-22.3	38.06	54	-15.94	-	-	216	233	V
6	* 11.716	33.19	PK2	38.4	-20.2	51.39	-	-	74	-22.61	343	304	V
	* 11.717	23.68	MAv1	38.4	-20.2	41.88	54	-12.12	-	-	0343	304	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

FCC Part15C 2.4GHz RSE.TST 30915 29 Dec 2015

Rev 9.5 26 Apr 2016