


BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

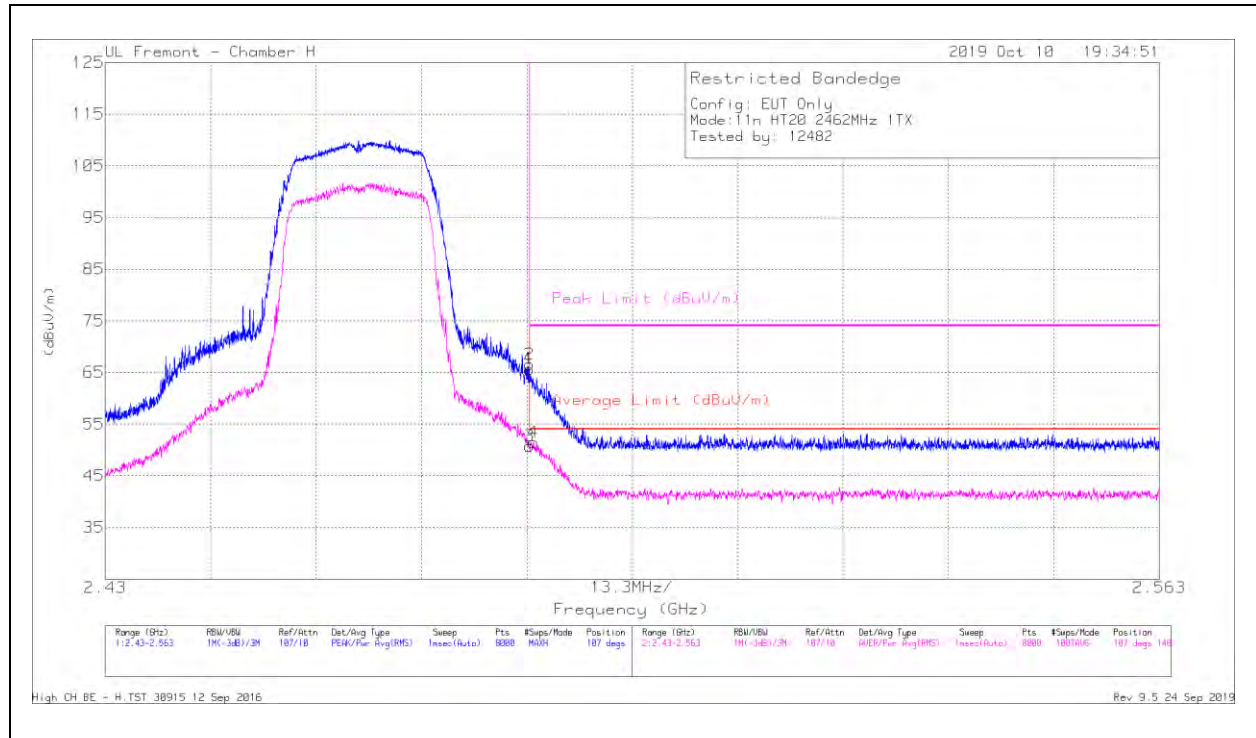


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.46	Pk	32.5	-23.3	66.66	-	-	74	-8.34	107	148	H
2	* 2.48354	57.36	Pk	32.5	-23.3	66.66	-	-	74	-7.44	107	148	H
3	* 2.48351	41.53	RMS	32.5	-23.3	50.73	54	-3.27	-	-	107	148	H
4	* 2.48404	42.25	RMS	32.5	-23.3	51.45	54	-2.55	-	-	107	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

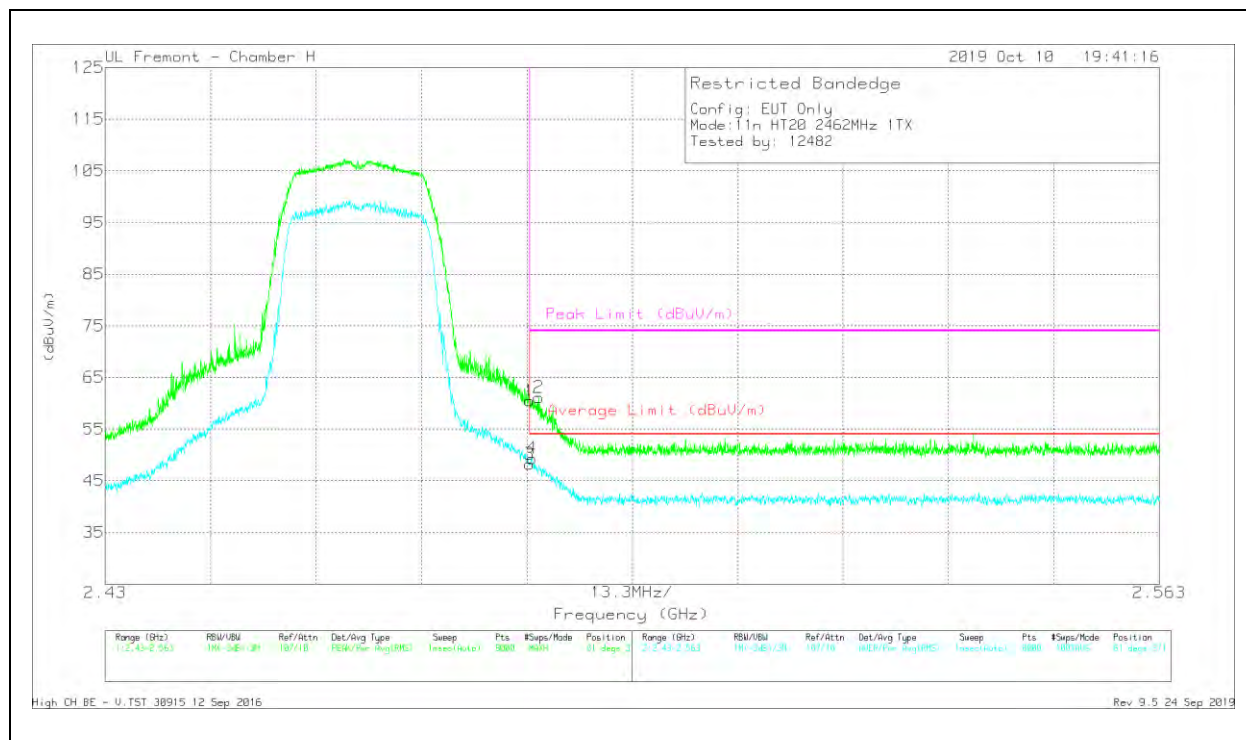

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	51.28	Pk	32.5	-23.3	60.48	-	-	74	-13.52	81	371	V
2	* 2.48469	51.94	Pk	32.5	-23.3	61.14	-	-	74	-12.86	81	371	V
3	* 2.48351	39.03	RMS	32.5	-23.3	48.23	54	-5.77	-	-	81	371	V
4	* 2.48382	40.15	RMS	32.5	-23.3	49.35	54	-4.65	-	-	81	371	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

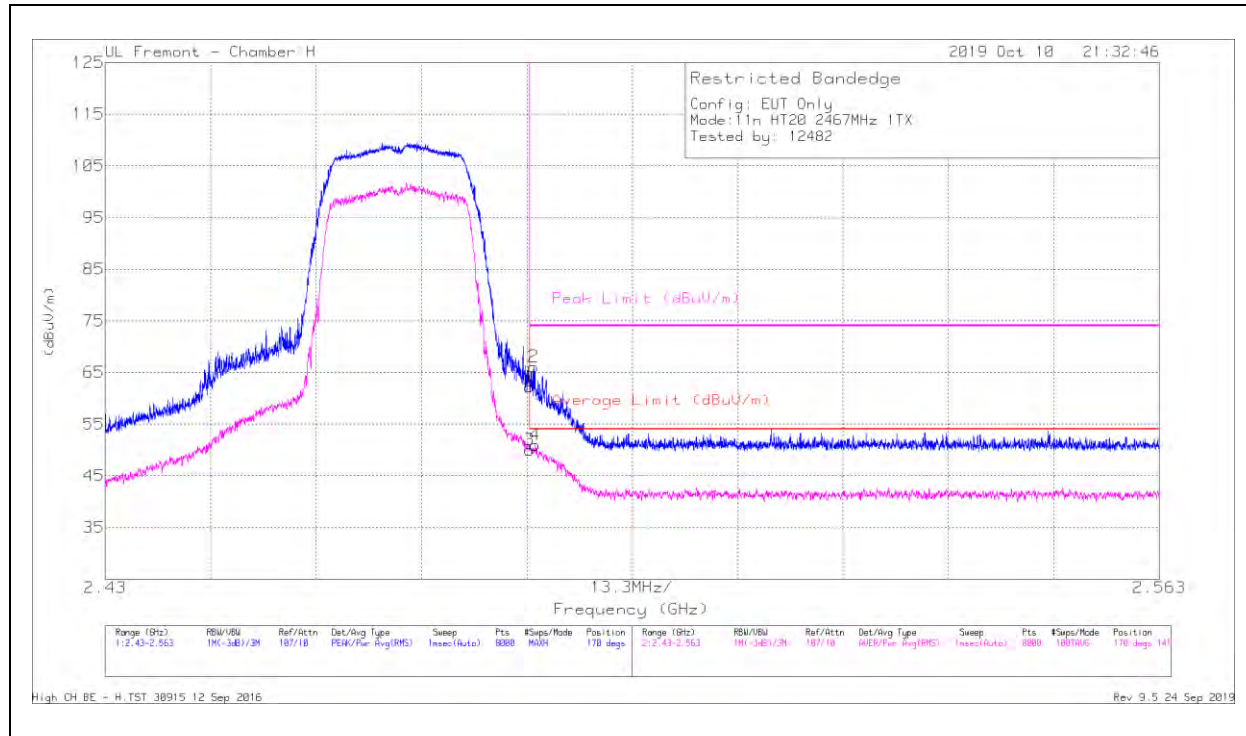

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.02	Pk	32.5	-23.3	62.22	-	-	74	-11.78	170	141	H
2	* 2.48406	56.94	Pk	32.5	-23.3	66.14	-	-	74	-7.86	170	141	H
3	* 2.48351	40.8	RMS	32.5	-23.3	50	54	-4	-	-	170	141	H
4	* 2.48425	41.77	RMS	32.5	-23.3	50.97	54	-3.03	-	-	170	141	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

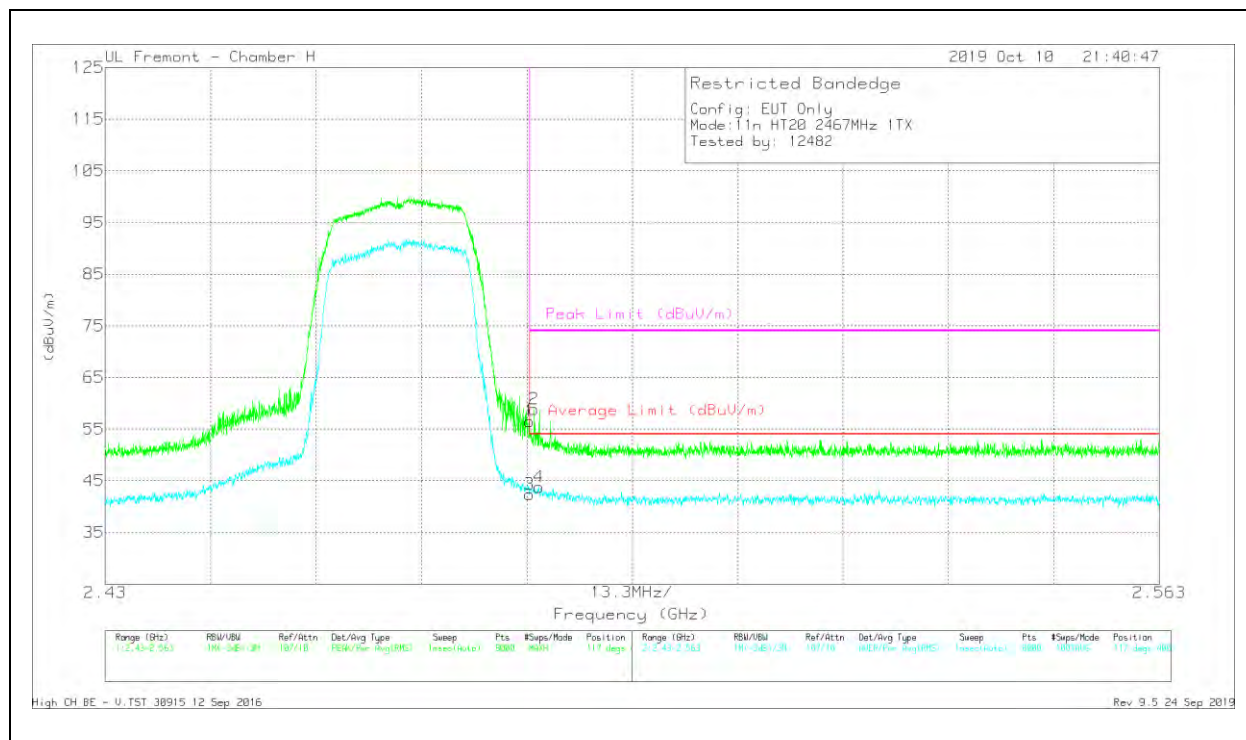

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Ampl/Cbri/FiltriPa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	47.35	Pk	32.5	-23.3	56.55	-	-	74	-17.45	117	400	V
2	* 2.48409	49.66	Pk	32.5	-23.3	58.86	-	-	74	-15.14	117	400	V
3	* 2.48351	33.17	RMS	32.5	-23.3	42.37	54	-11.63	-	-	117	400	V
4	* 2.48472	34.59	RMS	32.5	-23.3	43.79	54	-10.21	-	-	117	400	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

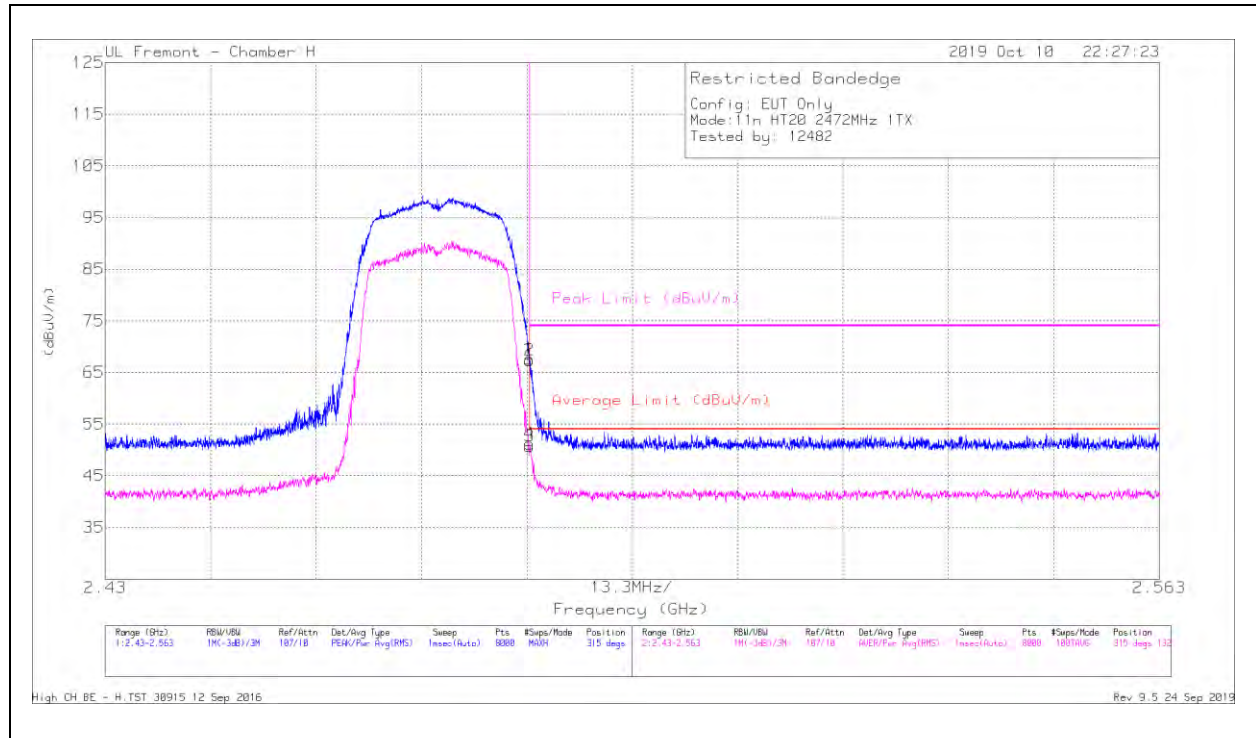


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	58.42	Pk	32.5	-23.3	67.62	-	-	74	-6.38	315	132	H
2	* 2.48356	58.19	Pk	32.5	-23.3	67.39	-	-	74	-6.61	315	132	H
3	* 2.48351	41.49	RMS	32.5	-23.3	50.69	54	-3.31	-	-	315	132	H
4	* 2.48354	42.01	RMS	32.5	-23.3	51.21	54	-2.79	-	-	315	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

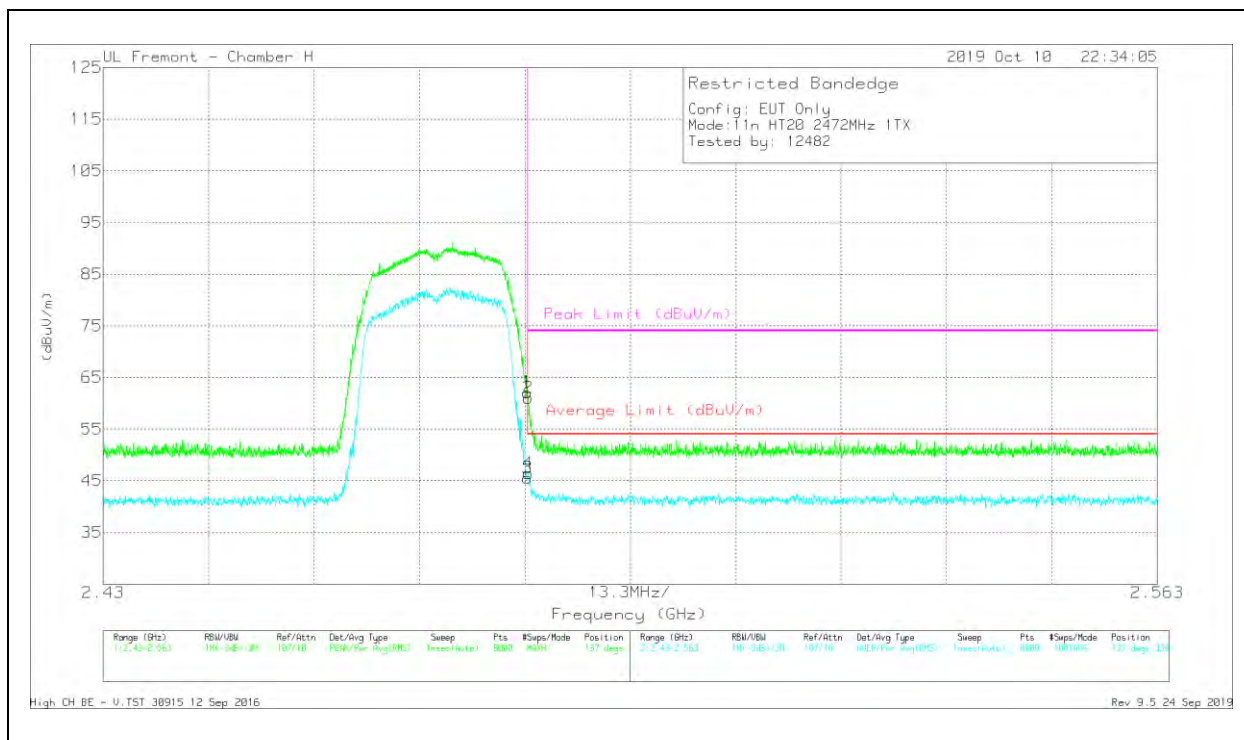

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	52.94	Pk	32.5	-23.3	62.14	-	-	74	-11.86	137	338	V
2	* 2.48361	51.87	Pk	32.5	-23.3	61.07	-	-	74	-12.93	137	338	V
3	* 2.48351	36.36	RMS	32.5	-23.3	45.56	54	-8.44	-	-	137	338	V
4	* 2.48361	37.26	RMS	32.5	-23.3	46.46	54	-7.54	-	-	137	338	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX LAT 3

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

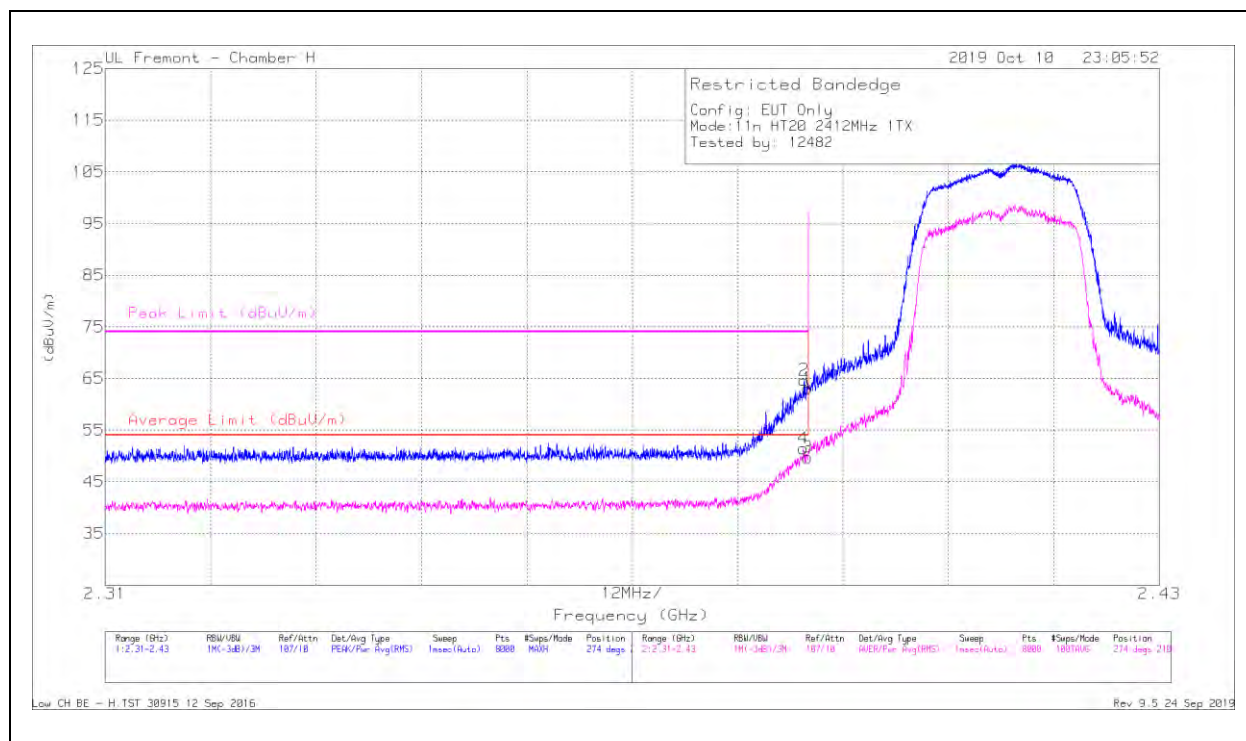


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	54.52	Pk	32.1	-23.5	63.12	-	-	74	-10.88	274	210	H
2	* 2.38957	56.06	Pk	32.1	-23.5	64.66	-	-	74	-9.34	274	210	H
3	* 2.38999	41.15	RMS	32.1	-23.5	49.75	54	-4.25	-	-	274	210	H
4	* 2.38948	42.86	RMS	32.1	-23.5	51.46	54	-2.54	-	-	274	210	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

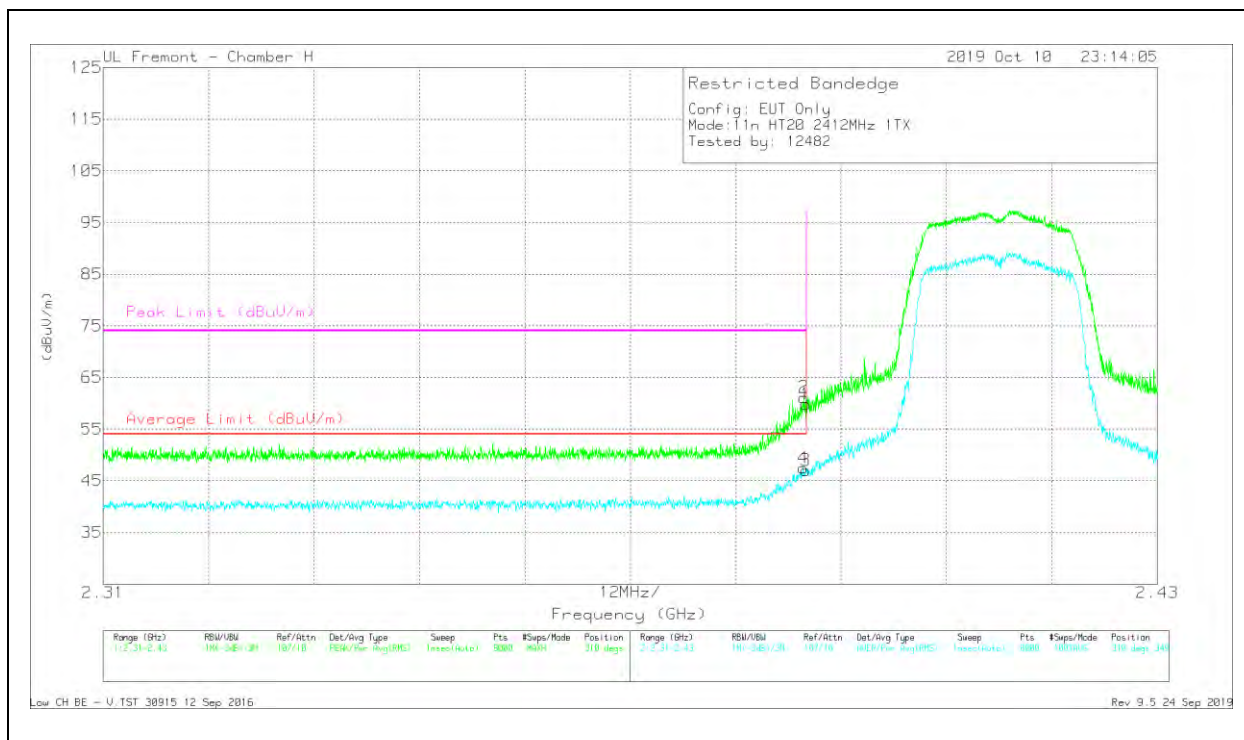

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	51.24	Pk	32.1	-23.5	59.84	-	-	74	-14.16	310	349	V
2	* 2.38977	52.54	Pk	32.1	-23.5	61.14	-	-	74	-12.86	310	349	V
3	* 2.38999	38.43	RMS	32.1	-23.5	47.03	54	-6.97	-	-	310	349	V
4	* 2.38966	38.86	RMS	32.1	-23.5	47.46	54	-6.54	-	-	310	349	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

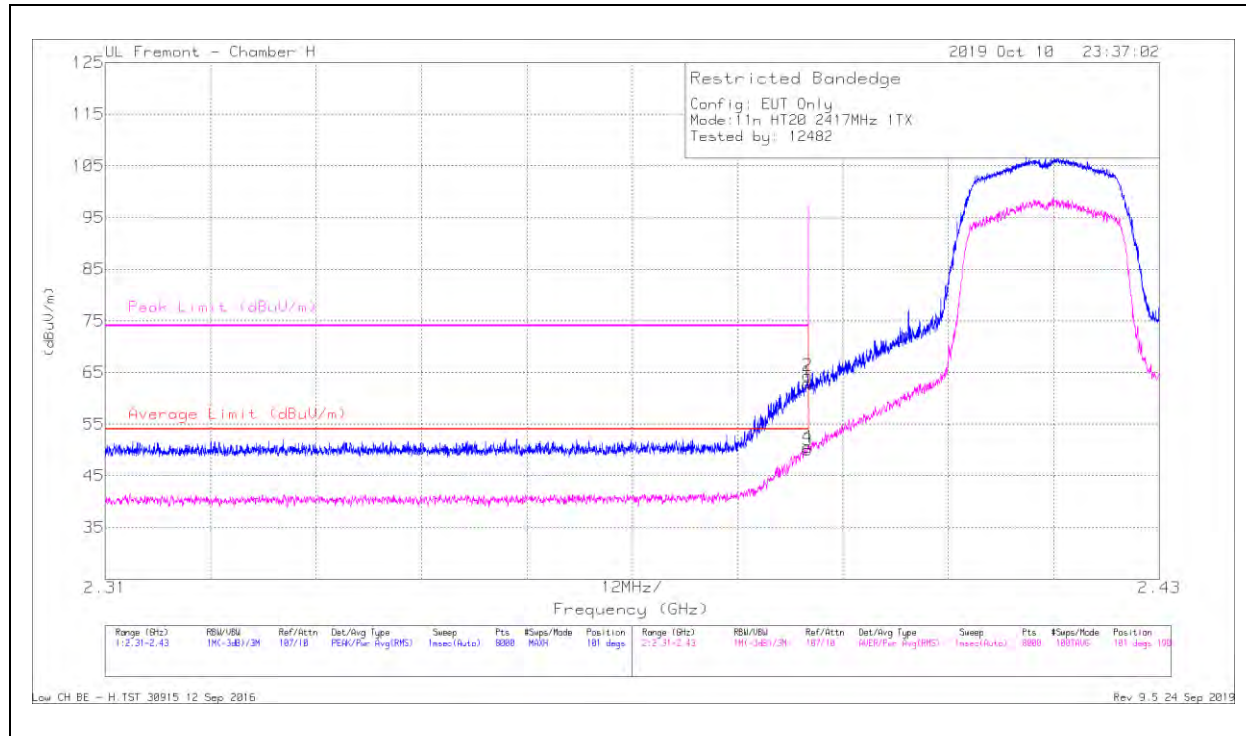

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	54.39	Pk	32.1	-23.5	62.99	-	-	74	-11.01	101	190	H
2	* 2.38996	55.81	Pk	32.1	-23.5	64.41	-	-	74	-9.59	101	190	H
3	* 2.38999	41.42	RMS	32.1	-23.5	50.02	54	-3.98	-	-	101	190	H
4	* 2.38995	41.95	RMS	32.1	-23.5	50.55	54	-3.45	-	-	101	190	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

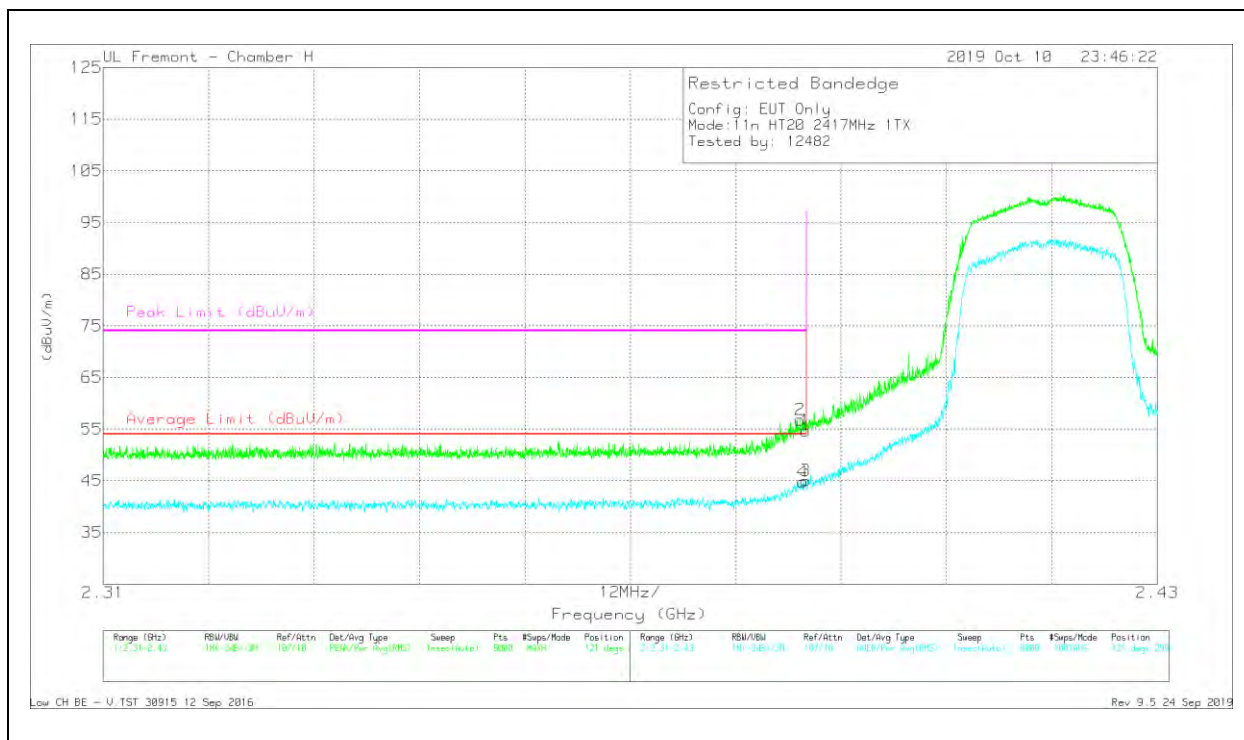

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	46.14	Pk	32.1	-23.5	54.74	-	-	74	-19.26	121	299	V
2	* 2.38932	48.21	Pk	32.1	-23.5	56.81	-	-	74	-17.19	121	299	V
3	* 2.38999	36.42	RMS	32.1	-23.5	45.02	54	-8.98	-	-	121	299	V
4	* 2.38965	36.18	RMS	32.1	-23.5	44.78	54	-9.22	-	-	121	299	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

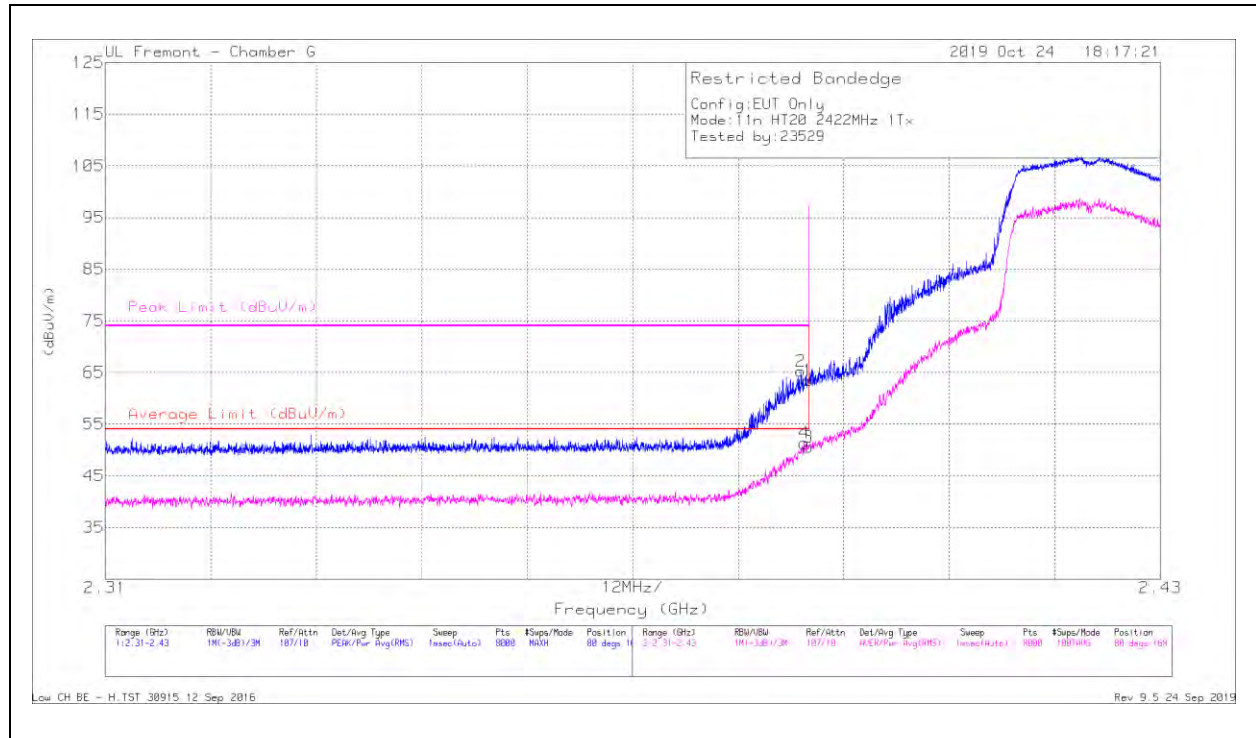

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	53.7	Pk	31.9	-22.2	63.4	-	-	74	-10.6	80	168	H
2	* 2.38912	55.54	Pk	31.9	-22.2	65.24	-	-	74	-8.76	80	168	H
3	* 2.38999	40.86	RMS	31.9	-22.2	50.56	54	-3.44	-	-	80	168	H
4	* 2.3895	41.64	RMS	31.9	-22.2	51.34	54	-2.66	-	-	80	168	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

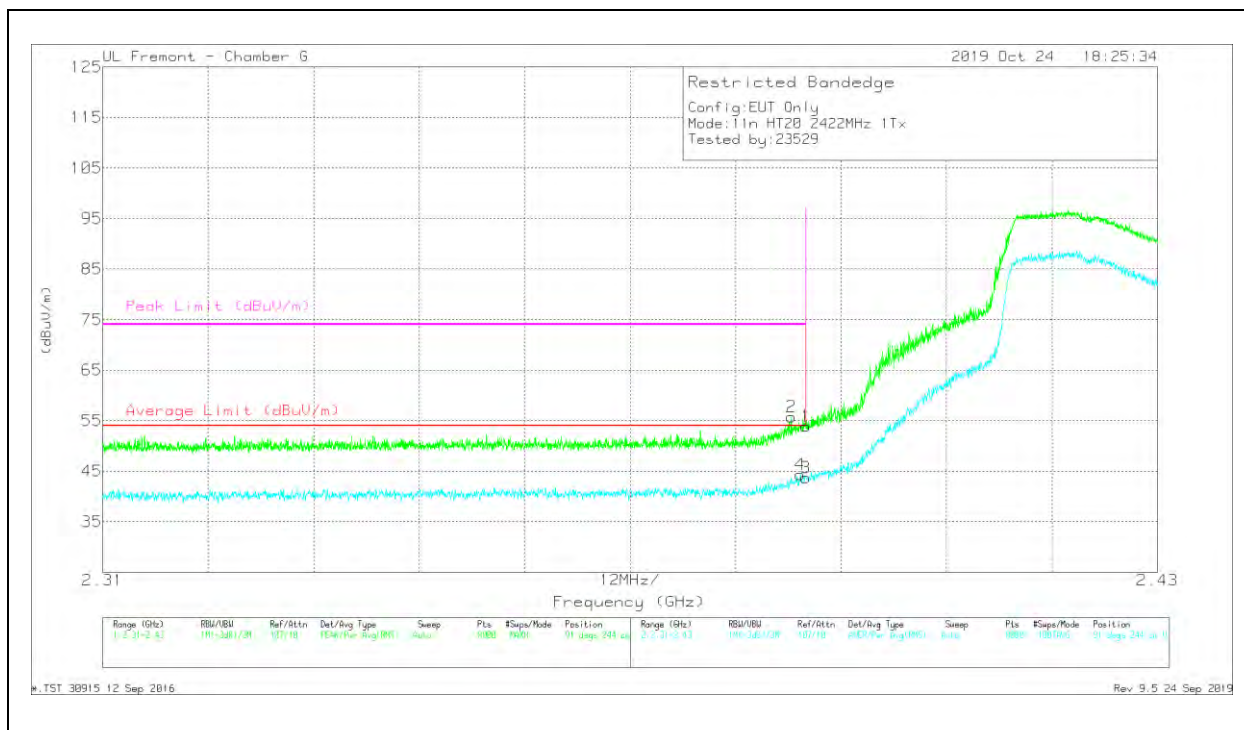

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	44.22	Pk	31.9	-22.2	53.92	-	-	74	-20.08	91	244	V
2	* 2.38834	46.04	Pk	31.9	-22.2	55.74	-	-	74	-18.26	91	244	V
3	* 2.38999	34.05	RMS	31.9	-22.2	43.75	54	-10.25	-	-	91	244	V
4	* 2.38938	34.65	RMS	31.9	-22.2	44.35	54	-9.65	-	-	91	244	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

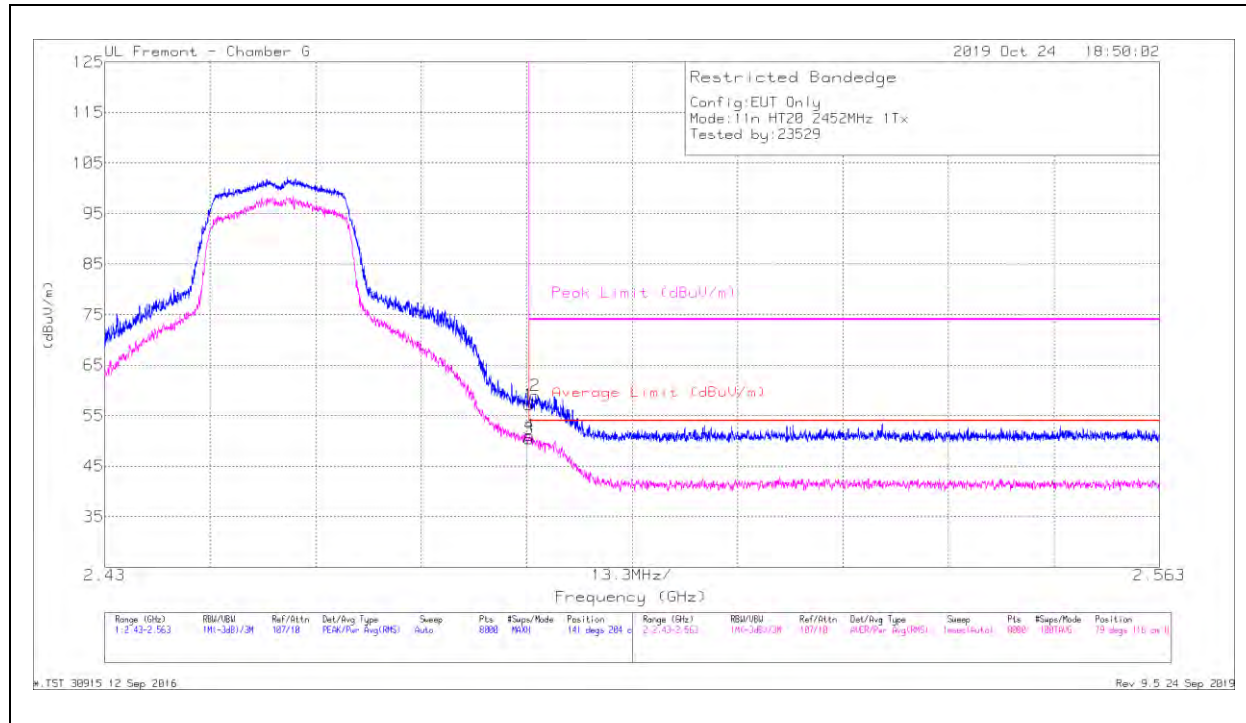


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	46.77	PK	32.5	-22.1	57.17	-	-	74	-16.83	141	204	H
2	* 2.48429	48.57	PK	32.5	-22.1	58.97	-	-	74	-15.03	141	204	H
3	* 2.48351	40.06	RMS	32.5	-22.1	50.46	54	-3.54	-	-	79	116	H
4	* 2.48357	40.7	RMS	32.5	-22.1	51.1	54	-2.9	-	-	79	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

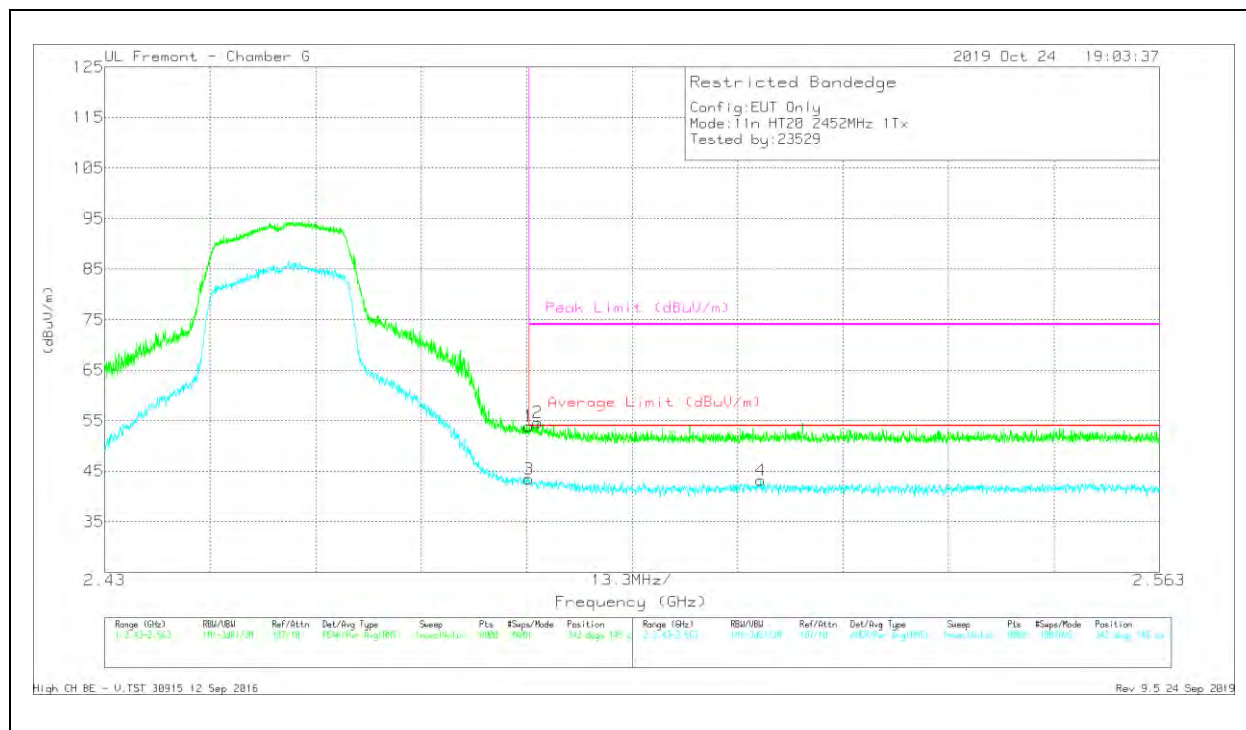


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.45	Pk	32.5	-22.1	53.85	-	-	74	-20.15	342	145	V
2	* 2.48464	44.27	Pk	32.5	-22.1	54.67	-	-	74	-19.33	342	145	V
3	* 2.48351	33.04	RMS	32.5	-22.1	43.44	54	-10.56	-	-	342	145	V
4	2.5127	33	RMS	32.4	-22.2	43.2	54	-10.8	-	-	342	145	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HORIZONTAL RESULT

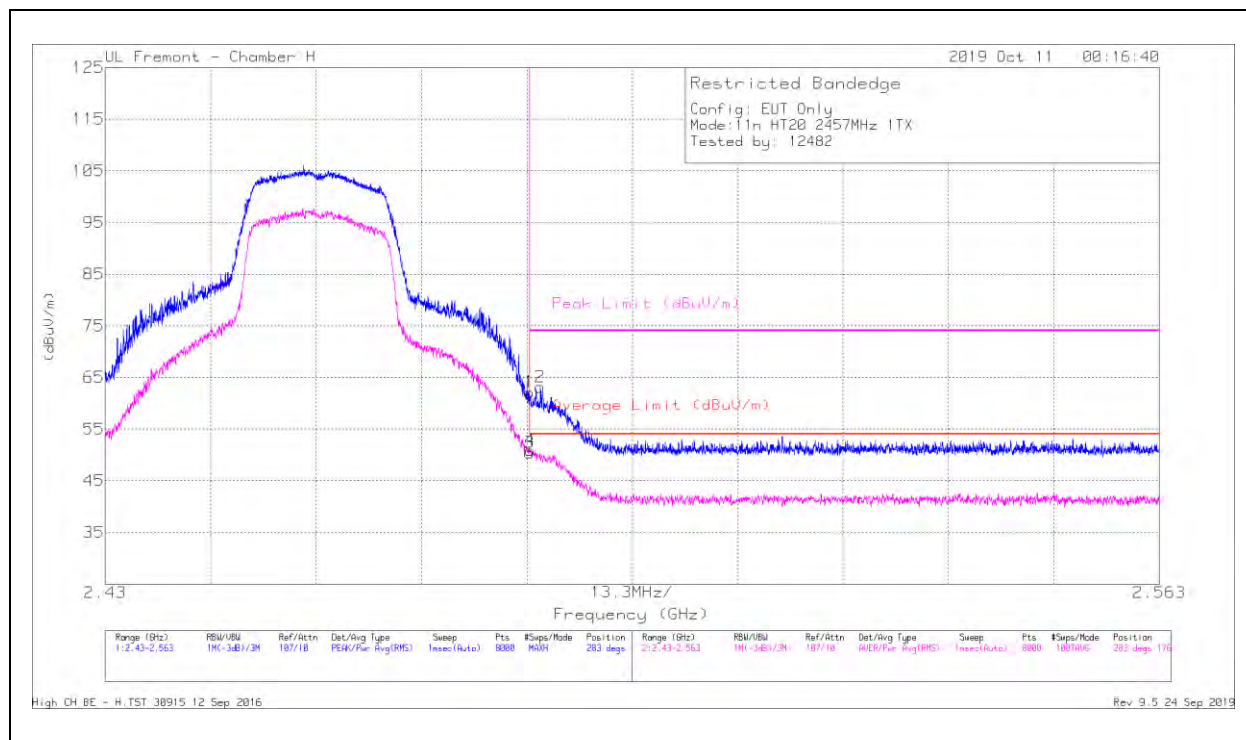


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	52.93	Pk	32.5	-23.3	62.13	-	-	74	-11.87	283	176	H
2	* 2.4849	53.94	Pk	32.5	-23.3	63.14	-	-	74	-10.86	283	176	H
3	* 2.48351	41.28	RMS	32.5	-23.3	50.48	54	-3.52	-	-	283	176	H
4	* 2.48364	41.68	RMS	32.5	-23.3	50.88	54	-3.12	-	-	283	176	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

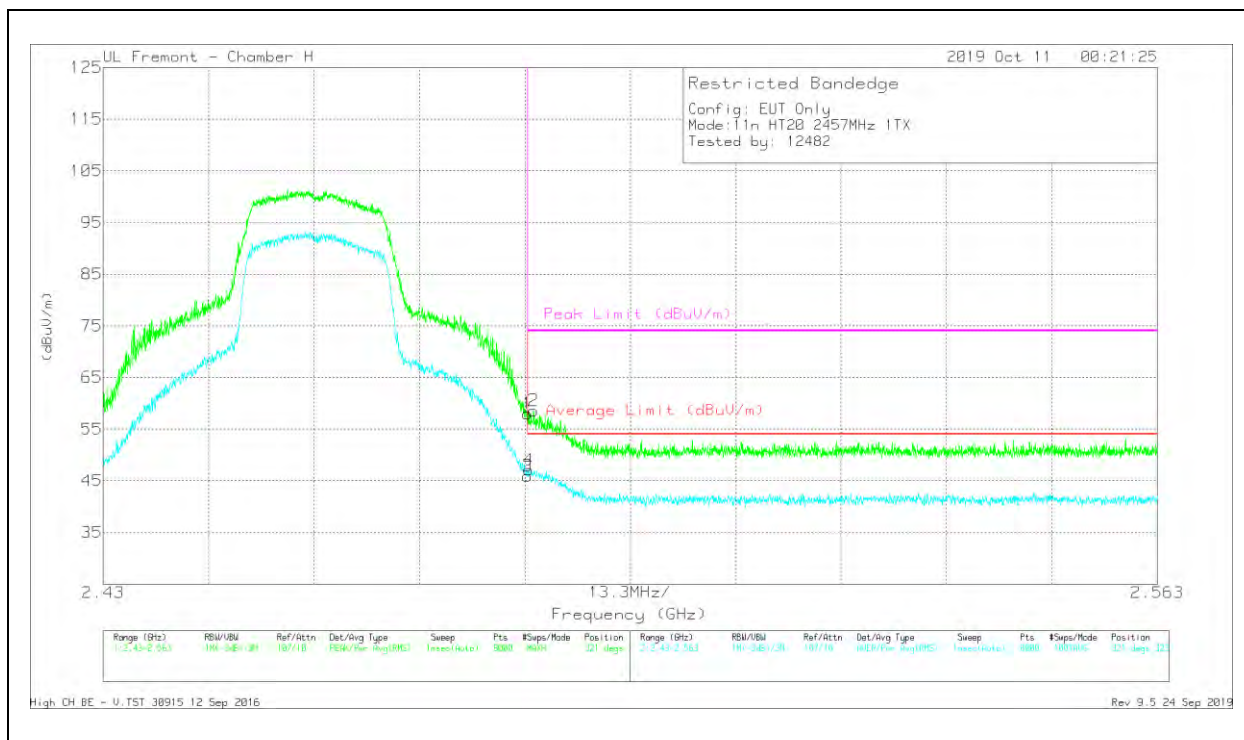

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	48.81	Pk	32.5	-23.3	58.01	-	-	74	-15.99	321	323	V
2	* 2.48429	49.36	Pk	32.5	-23.3	58.56	-	-	74	-15.44	321	323	V
3	* 2.48351	36.7	RMS	32.5	-23.3	45.9	54	-8.1	-	-	321	323	V
4	* 2.48367	37.89	RMS	32.5	-23.3	47.09	54	-6.91	-	-	321	323	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

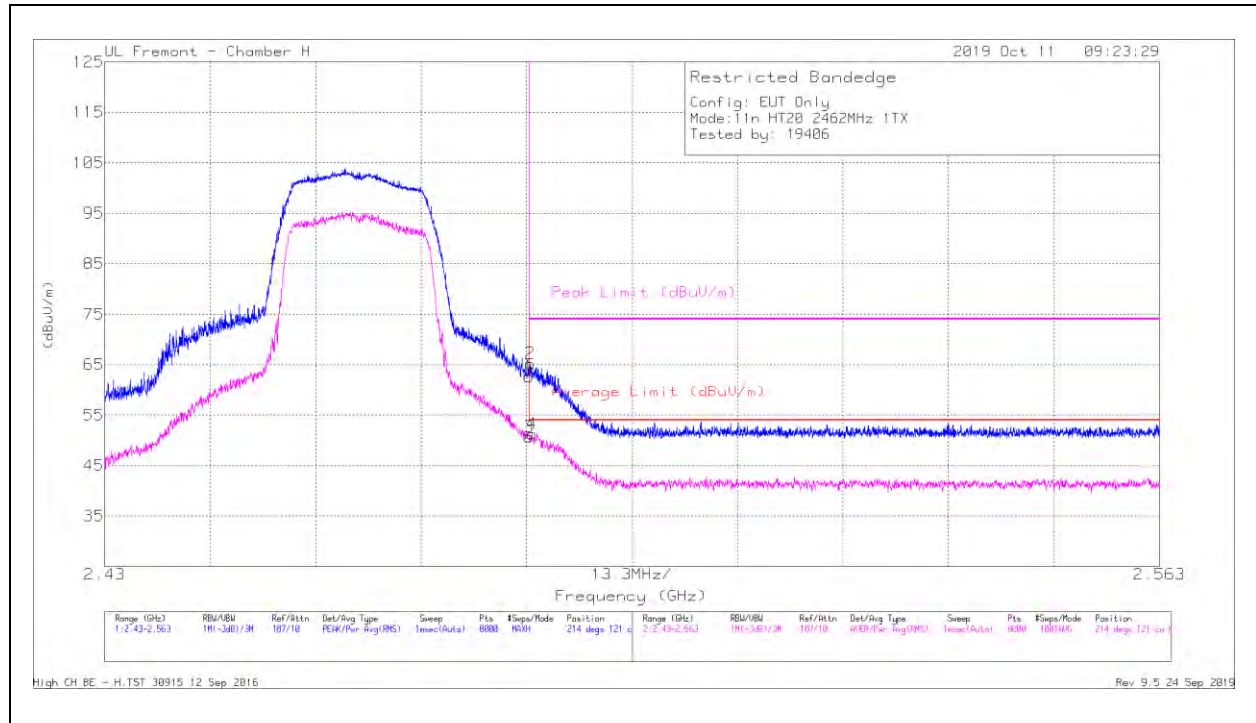


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.45	Pk	32.5	-23.3	62.65	-	-	74	-11.35	214	121	H
2	* 2.48362	56.05	Pk	32.5	-23.3	65.25	-	-	74	-8.75	214	121	H
3	* 2.48351	41.47	RMS	32.5	-23.3	50.67	54	-3.33	-	-	214	121	H
4	* 2.48387	42.11	RMS	32.5	-23.3	51.31	54	-2.69	-	-	214	121	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

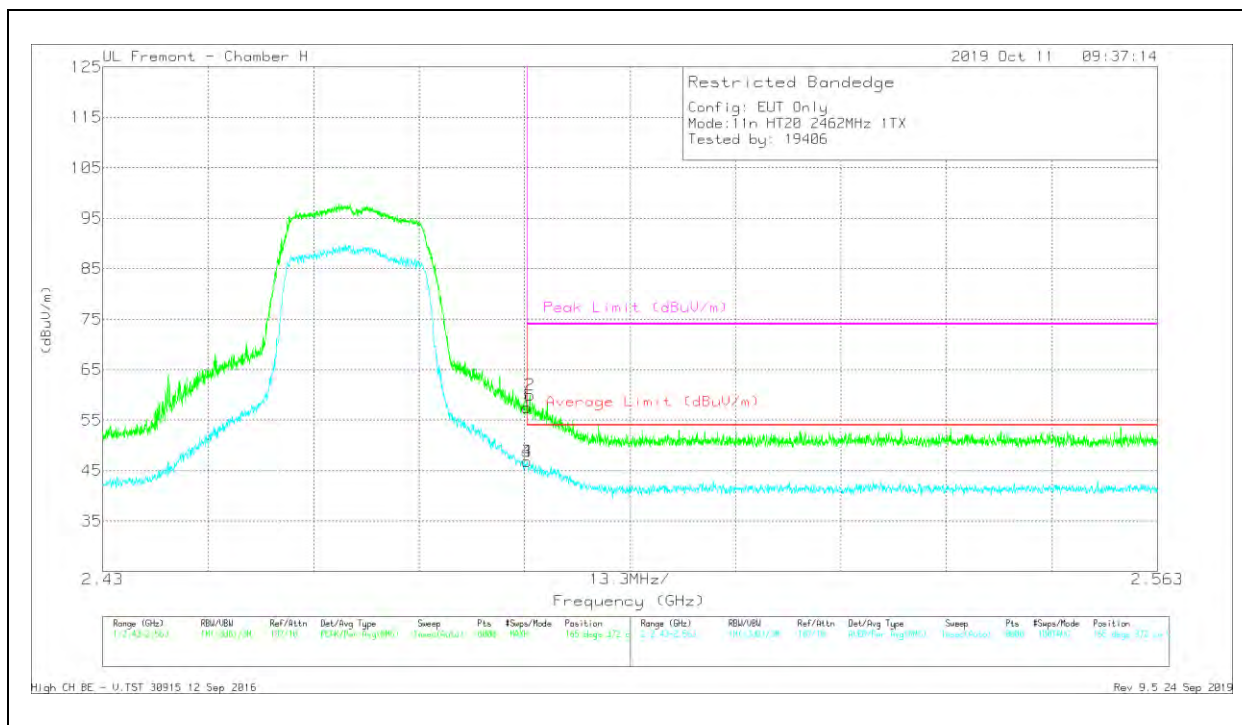

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	48.24	Pk	32.5	-23.3	57.44	-	-	74	-16.56	165	372	V
2	* 2.48385	50.78	Pk	32.5	-23.3	59.98	-	-	74	-14.02	165	372	V
3	* 2.48351	37.56	RMS	32.5	-23.3	46.76	54	-7.24	-	-	165	372	V
4	* 2.48352	37.61	RMS	32.5	-23.3	46.81	54	-7.19	-	-	165	372	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

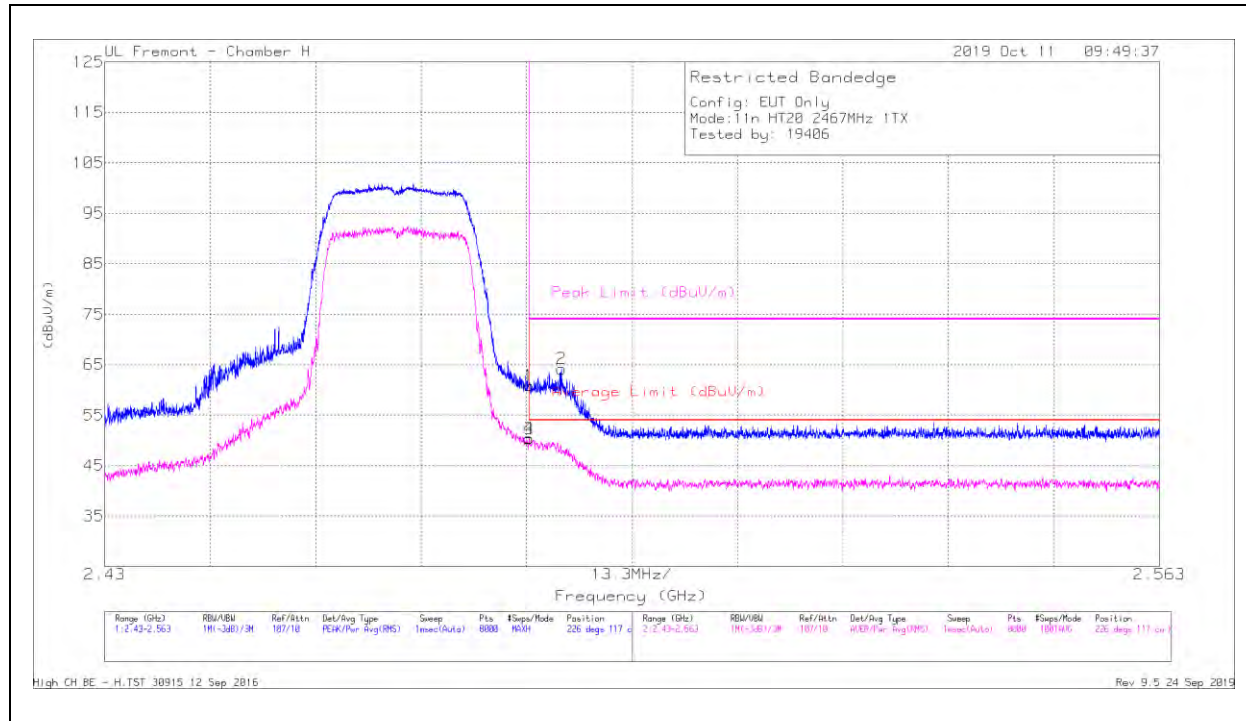


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	51.64	Pk	32.5	-23.3	60.84	-	-	74	-13.16	226	117	H
2	* 2.4876	54.94	Pk	32.5	-23.3	64.14	-	-	74	-9.86	226	117	H
3	* 2.48351	41.11	RMS	32.5	-23.3	50.31	54	-3.69	-	-	226	117	H
4	* 2.48352	41.19	RMS	32.5	-23.3	50.39	54	-3.61	-	-	226	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

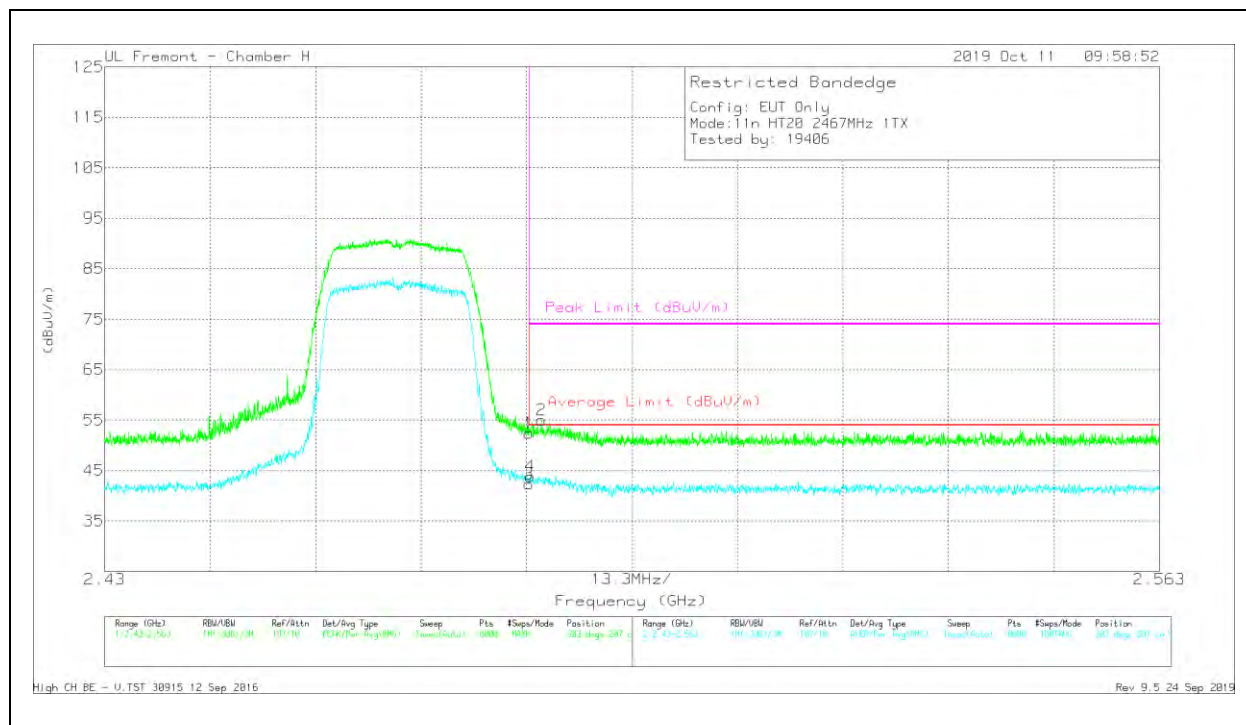

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.24	Pk	32.5	-23.3	52.44	-	-	74	-21.56	303	207	V
2	* 2.48505	45.81	Pk	32.5	-23.3	55.01	-	-	74	-18.99	303	207	V
3	* 2.48351	33.15	RMS	32.5	-23.3	42.35	54	-11.65	-	-	303	207	V
4	* 2.48366	34.66	RMS	32.5	-23.3	43.86	54	-10.14	-	-	303	207	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

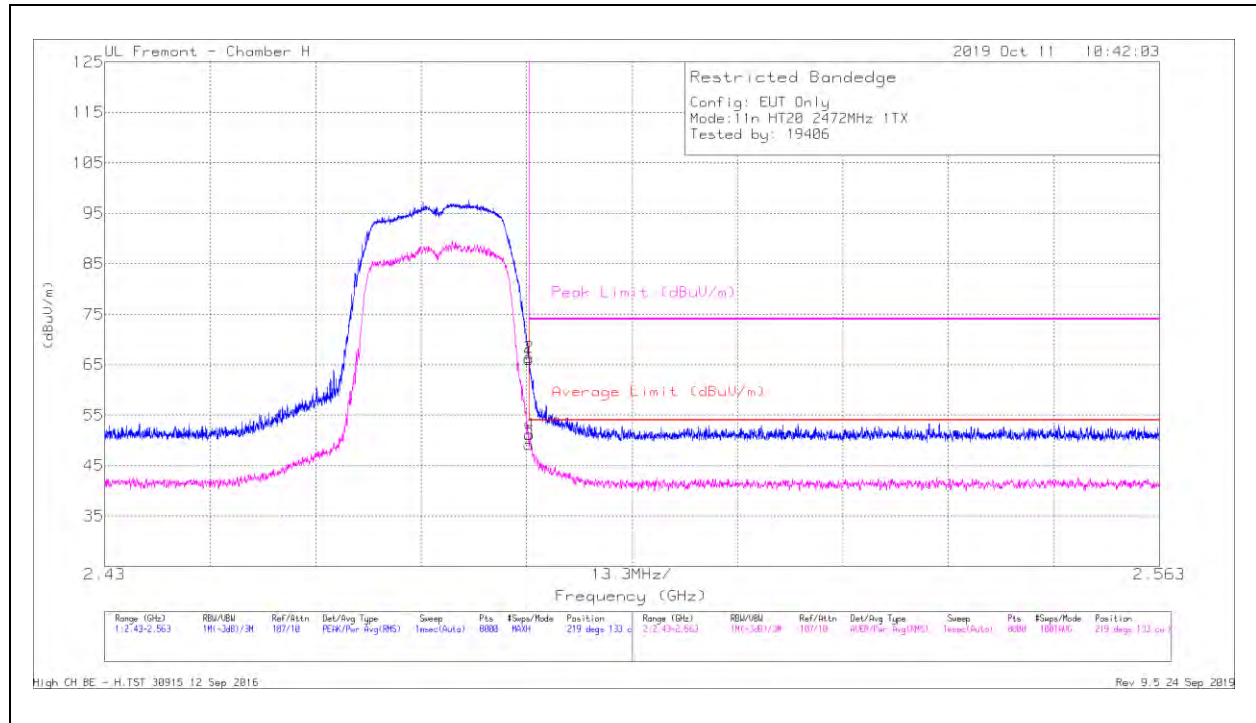


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.88	Pk	32.5	-23.3	66.08	-	-	74	-7.92	219	133	H
2	* 2.48352	57.25	Pk	32.5	-23.3	66.45	-	-	74	-7.55	219	133	H
3	* 2.48351	40.02	RMS	32.5	-23.3	49.22	54	-4.78	-	-	219	133	H
4	* 2.48359	41.98	RMS	32.5	-23.3	51.18	54	-2.82	-	-	219	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

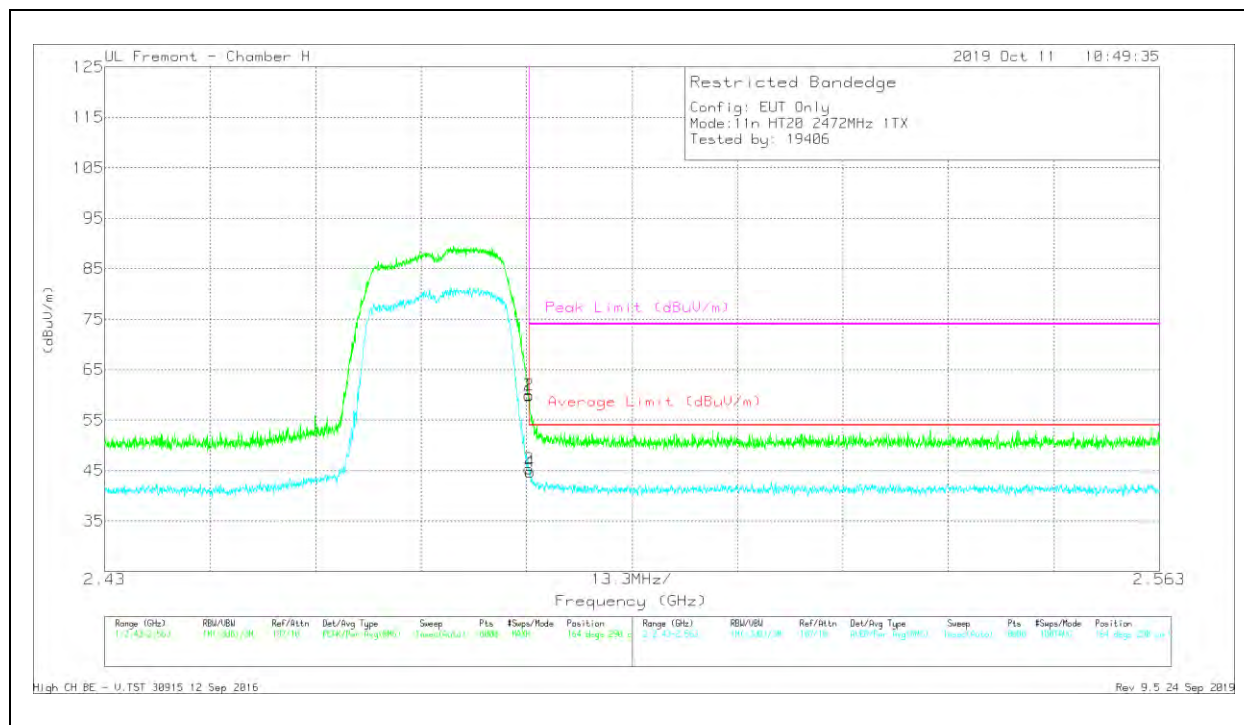


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	50.7	Pk	32.5	-23.3	59.9	-	-	74	-14.1	164	290	V
2	* 2.48352	50.74	Pk	32.5	-23.3	59.94	-	-	74	-14.06	164	290	V
3	* 2.48351	36.1	RMS	32.5	-23.3	45.3	54	-8.7	-	-	164	290	V
4	* 2.48364	35.57	RMS	32.5	-23.3	44.77	54	-9.23	-	-	164	290	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

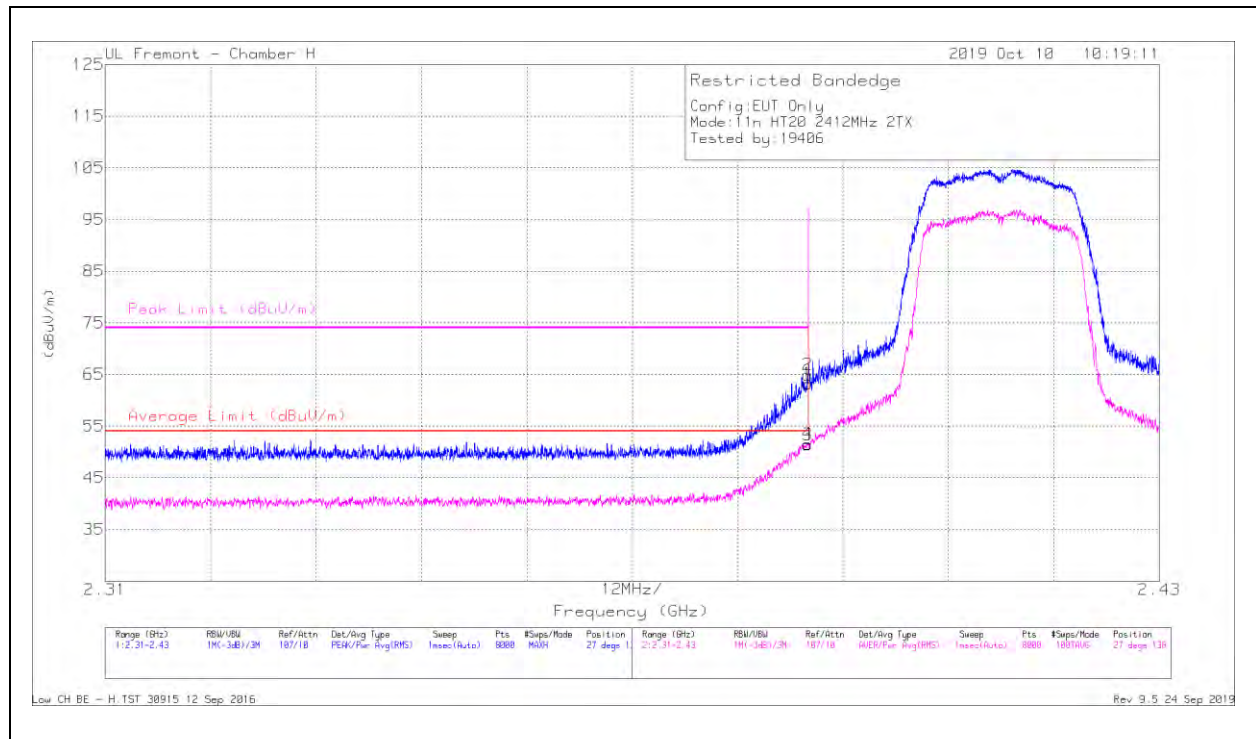2TX UAT 1 + LAT 3 CDD MODE**BANDEDGE (LOW CHANNEL, CH 1)****HORIZONTAL RESULT**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	54.62	Pk	32.1	-23.5	63.22	-	-	74	-10.78	27	138	H
2	* 2.38996	56.36	Pk	32.1	-23.5	64.96	-	-	74	-9.04	27	138	H
3	* 2.38999	42.79	RMS	32.1	-23.5	51.39	54	-2.61	-	-	27	138	H
4	* 2.38998	42.94	RMS	32.1	-23.5	51.54	54	-2.46	-	-	27	138	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

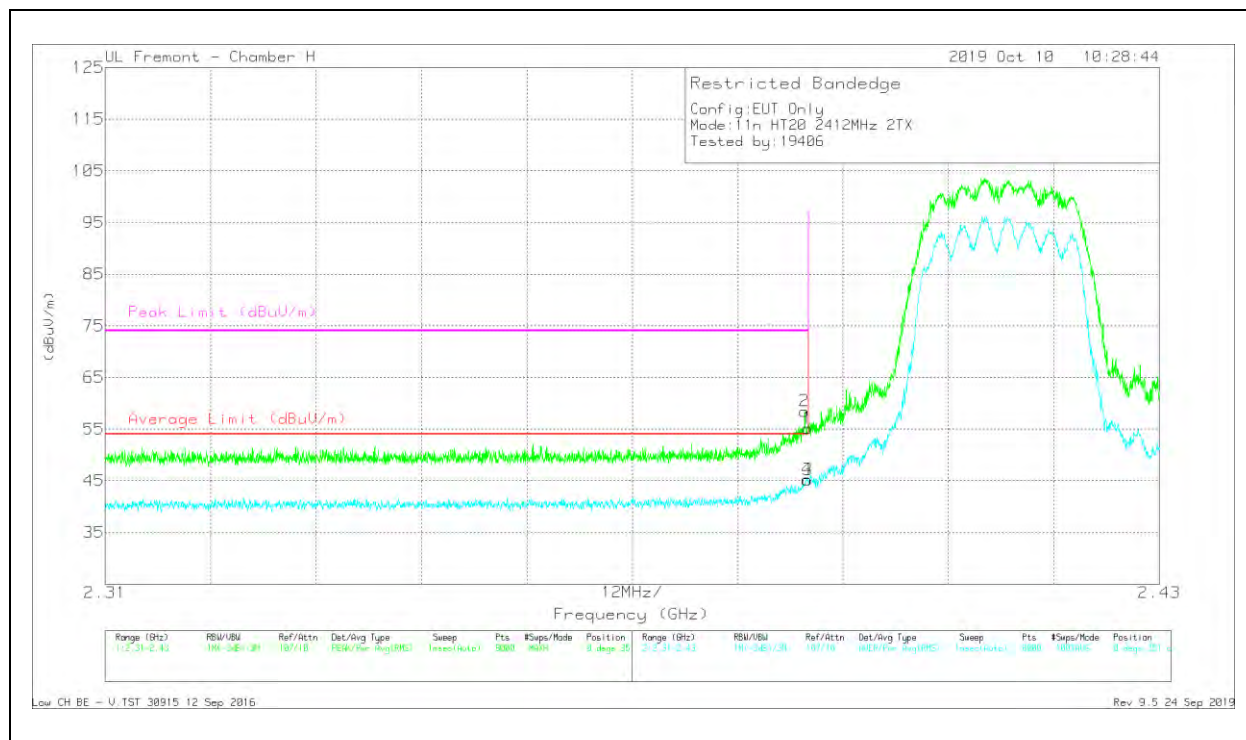

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	46.57	Pk	32.1	-23.5	55.17	-	-	74	-18.83	0	351	V
2	* 2.38963	49.89	Pk	32.1	-23.5	58.49	-	-	74	-15.51	0	351	V
3	* 2.38999	36.58	RMS	32.1	-23.5	45.18	54	-8.82	-	-	0	351	V
4	* 2.38987	36.65	RMS	32.1	-23.5	45.25	54	-8.75	-	-	0	351	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

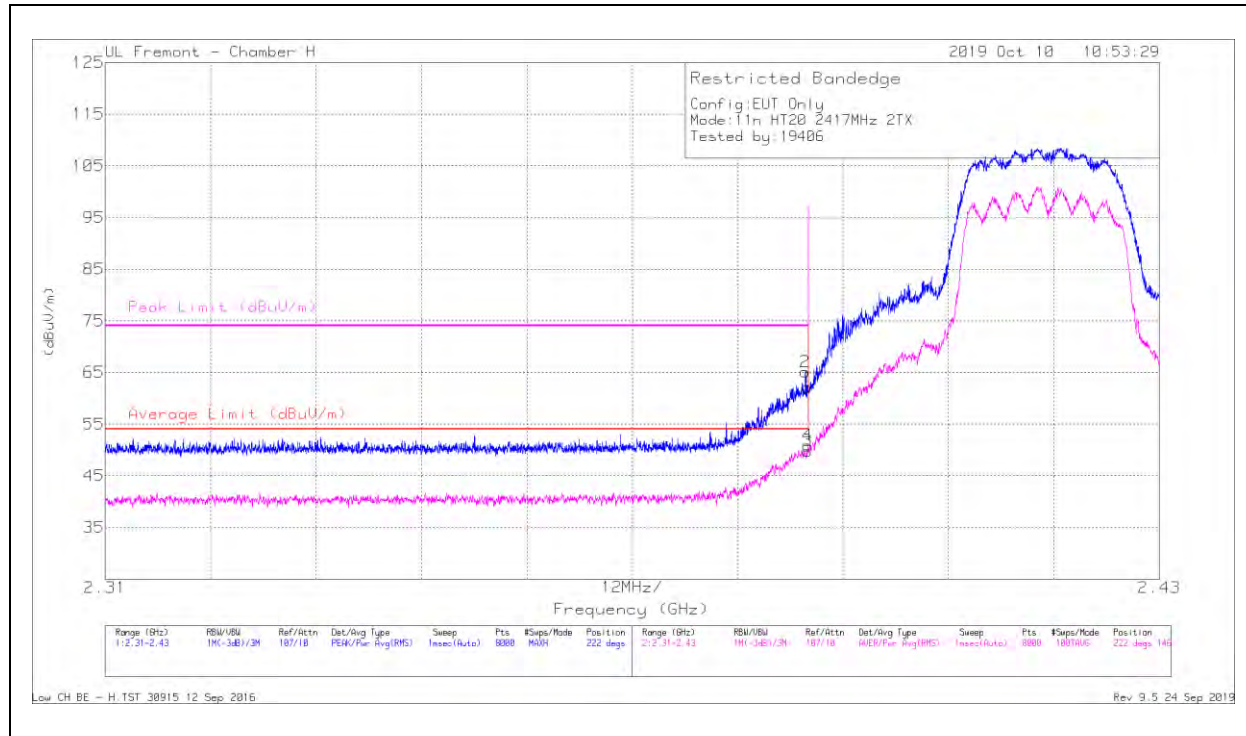

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	53.49	Pk	32.1	-23.5	62.09	-	-	74	-11.91	222	146	H
2	* 2.38969	56.52	Pk	32.1	-23.5	65.12	-	-	74	-8.88	222	146	H
3	* 2.38999	41.24	RMS	32.1	-23.5	49.84	54	-4.16	-	-	222	146	H
4	* 2.38995	42.24	RMS	32.1	-23.5	50.84	54	-3.16	-	-	222	146	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

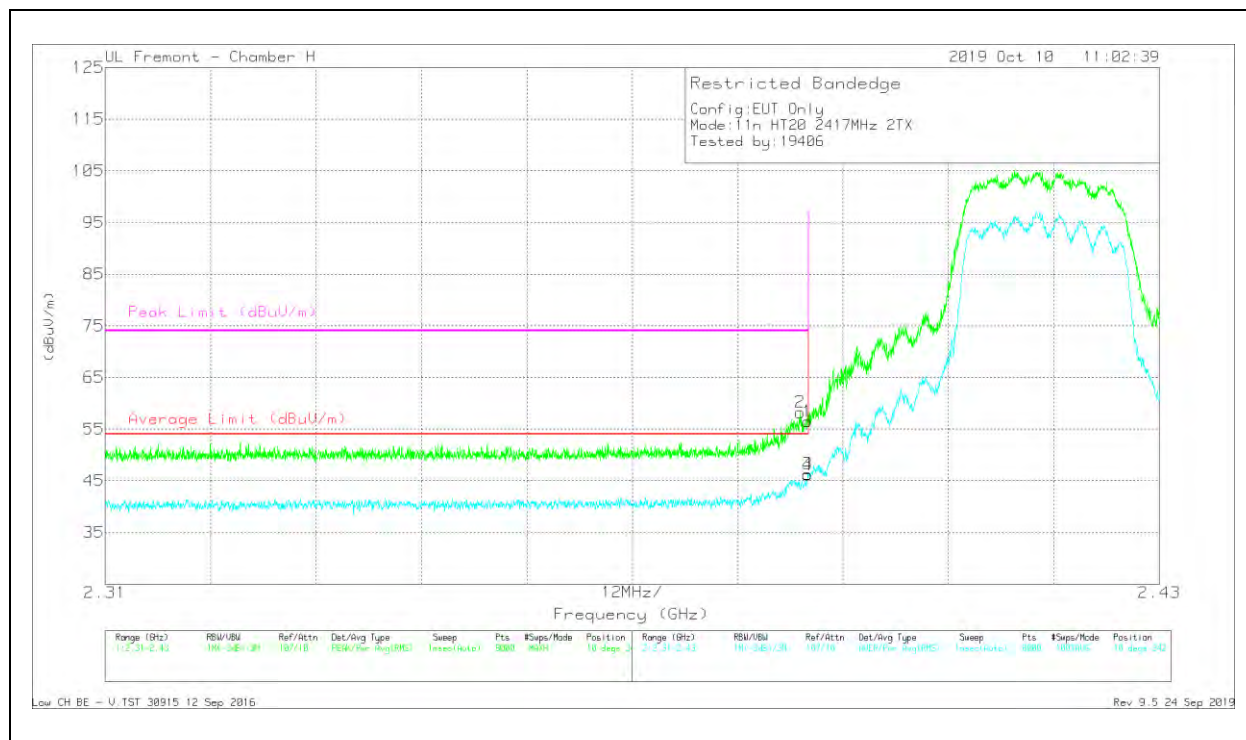

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	47.89	Pk	32.1	-23.5	56.49	-	-	74	-17.51	10	342	V
2	* 2.38912	49.67	Pk	32.1	-23.5	58.27	-	-	74	-15.73	10	342	V
3	* 2.38999	37.72	RMS	32.1	-23.5	46.32	54	-7.68	-	-	10	342	V
4	* 2.38998	37.55	RMS	32.1	-23.5	46.15	54	-7.85	-	-	10	342	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 10)

HORIZONTAL RESULT

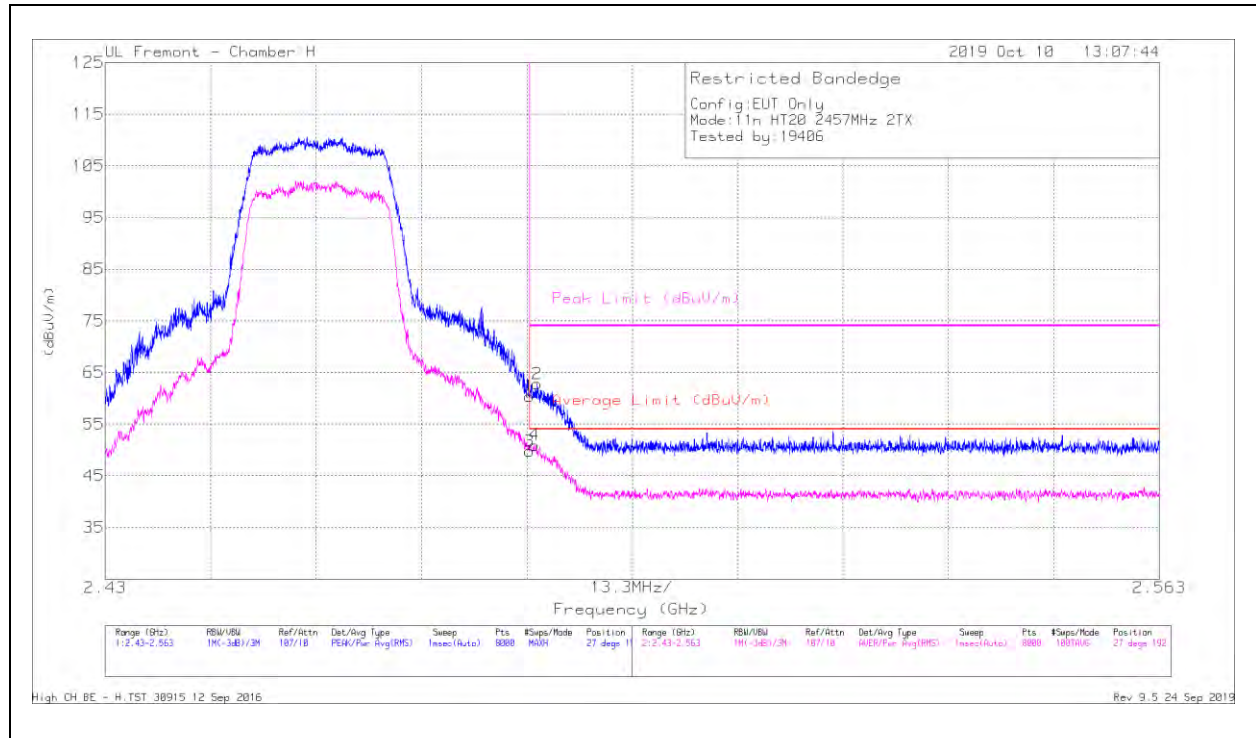


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	51.15	Pk	32.5	-23.3	60.35	-	-	74	-13.65	27	192	H
2	* 2.48449	53.6	Pk	32.5	-23.3	62.8	-	-	74	-11.2	27	192	H
3	* 2.48351	40.57	RMS	32.5	-23.3	49.77	54	-4.23	-	-	27	192	H
4	* 2.48415	41.74	RMS	32.5	-23.3	50.94	54	-3.06	-	-	27	192	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

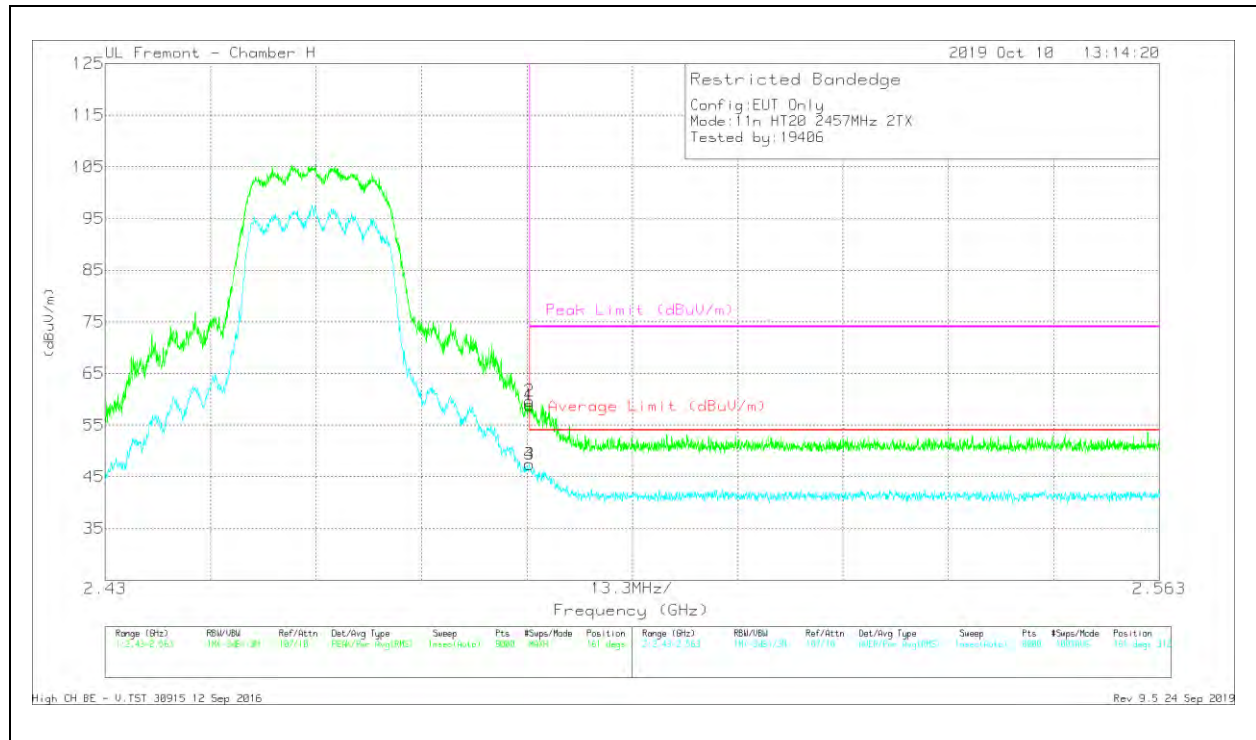

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	49.68	Pk	32.5	-23.3	58.88	-	-	74	-15.12	161	312	V
2	* 2.48354	50.45	Pk	32.5	-23.3	59.65	-	-	74	-14.35	161	312	V
3	* 2.48351	38.22	RMS	32.5	-23.3	47.42	54	-6.58	-	-	161	312	V
4	* 2.48352	38.23	RMS	32.5	-23.3	47.43	54	-6.57	-	-	161	312	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

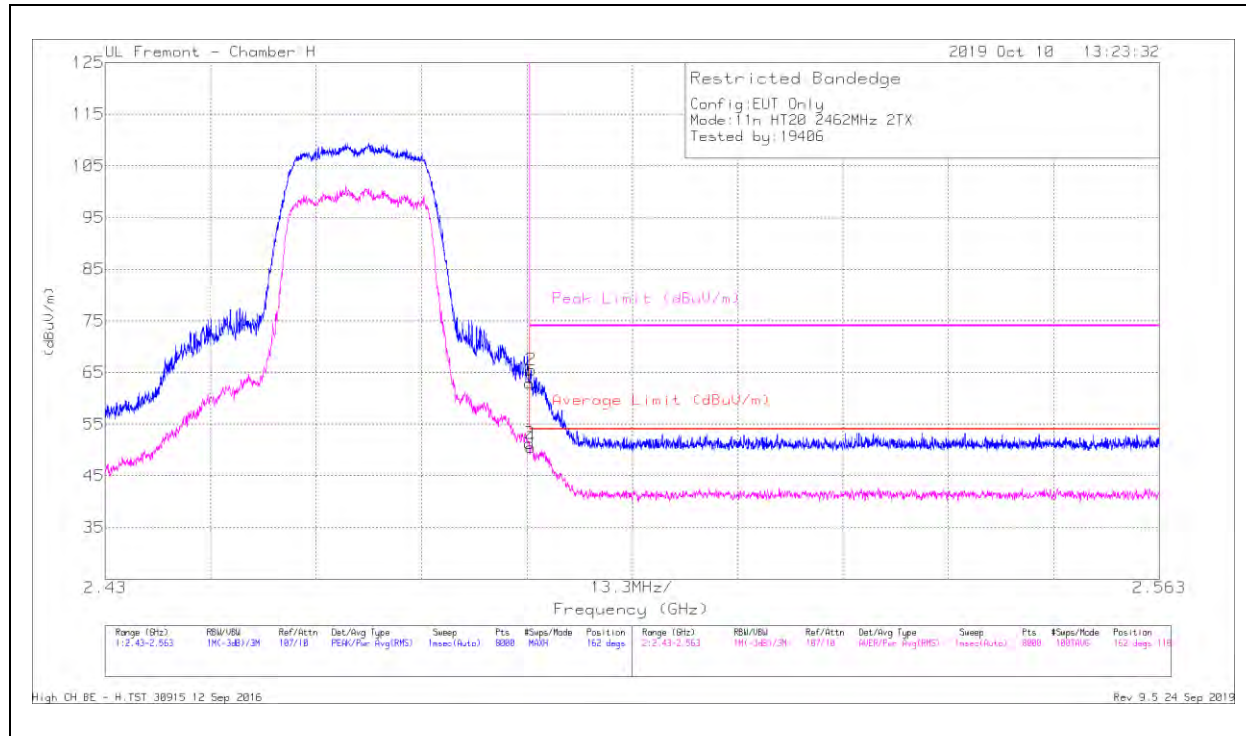

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.76	Pk	32.5	-23.3	62.96	-	-	74	-11.04	162	118	H
2	* 2.48374	56.31	Pk	32.5	-23.3	65.51	-	-	74	-8.49	162	118	H
3	* 2.48351	42.08	RMS	32.5	-23.3	51.28	54	-2.72	-	-	162	118	H
4	* 2.48367	41.35	RMS	32.5	-23.3	50.55	54	-3.45	-	-	162	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

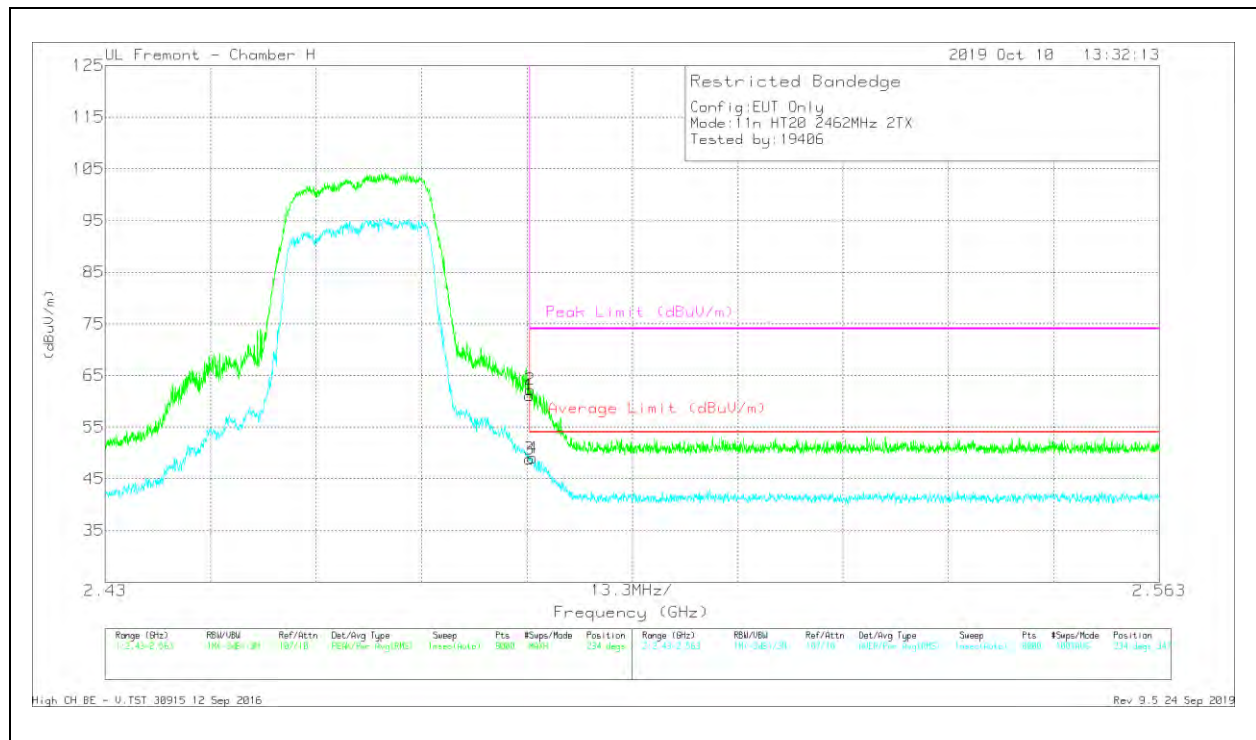

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	51.93	Pk	32.5	-23.3	61.13	-	-	74	-12.87	234	347	V
2	* 2.48364	53.06	Pk	32.5	-23.3	62.26	-	-	74	-11.74	234	347	V
3	* 2.48351	39.65	RMS	32.5	-23.3	48.85	54	-5.15	-	-	234	347	V
4	* 2.48392	39.83	RMS	32.5	-23.3	49.03	54	-4.97	-	-	234	347	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

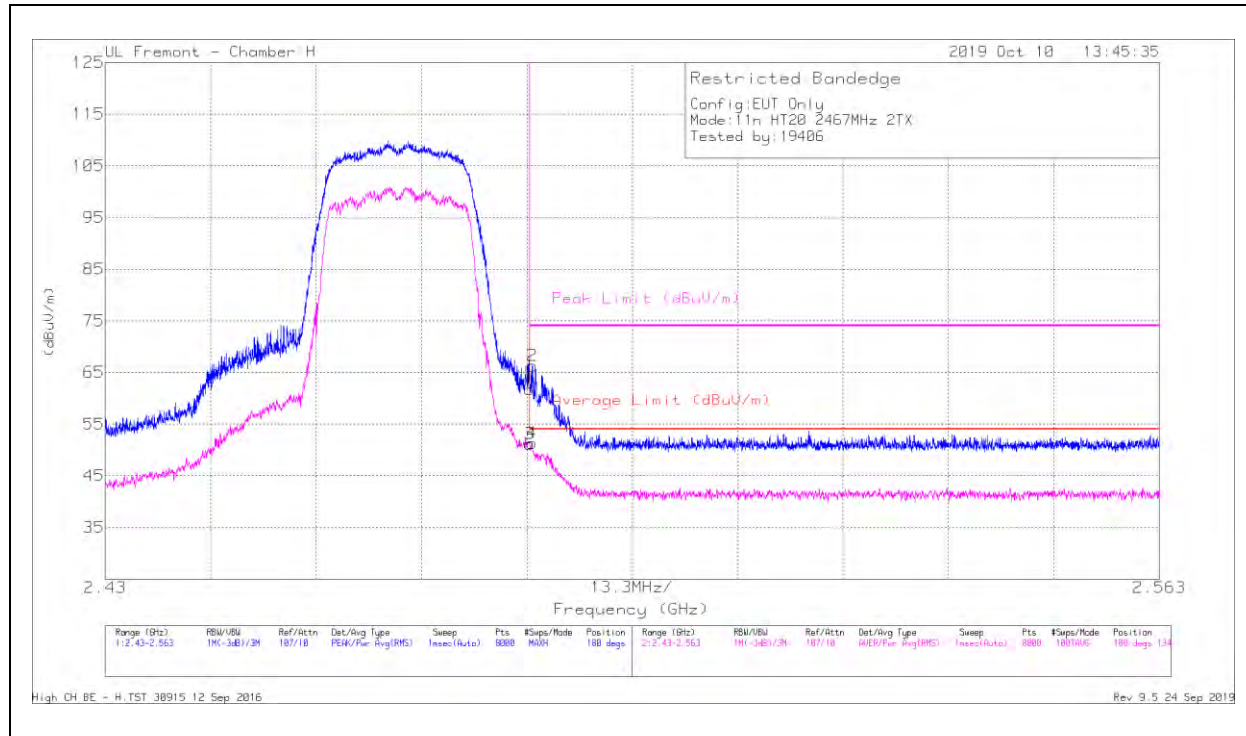

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	52.52	Pk	32.5	-23.3	61.72	-	-	74	-12.28	180	134	H
2	* 2.48389	57.1	Pk	32.5	-23.3	66.3	-	-	74	-7.7	180	134	H
3	* 2.48351	41.99	RMS	32.5	-23.3	51.19	54	-2.81	-	-	180	134	H
4	* 2.48382	42.12	RMS	32.5	-23.3	51.32	54	-2.68	-	-	180	134	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

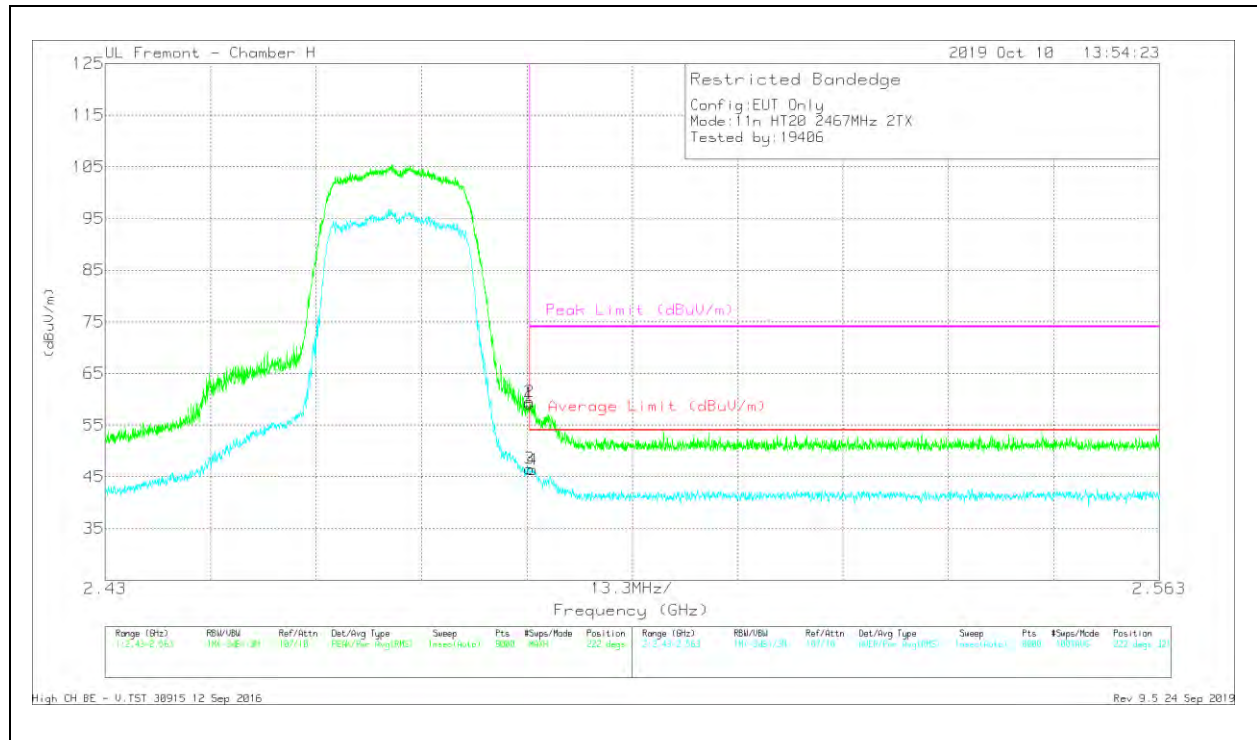

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	49.95	Pk	32.5	-23.3	59.15	-	-	74	-14.85	222	321	V
2	* 2.48352	50.31	Pk	32.5	-23.3	59.51	-	-	74	-14.49	222	321	V
3	* 2.48351	37.36	RMS	32.5	-23.3	46.56	54	-7.44	-	-	222	321	V
4	* 2.48395	37.16	RMS	32.5	-23.3	46.36	54	-7.64	-	-	222	321	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

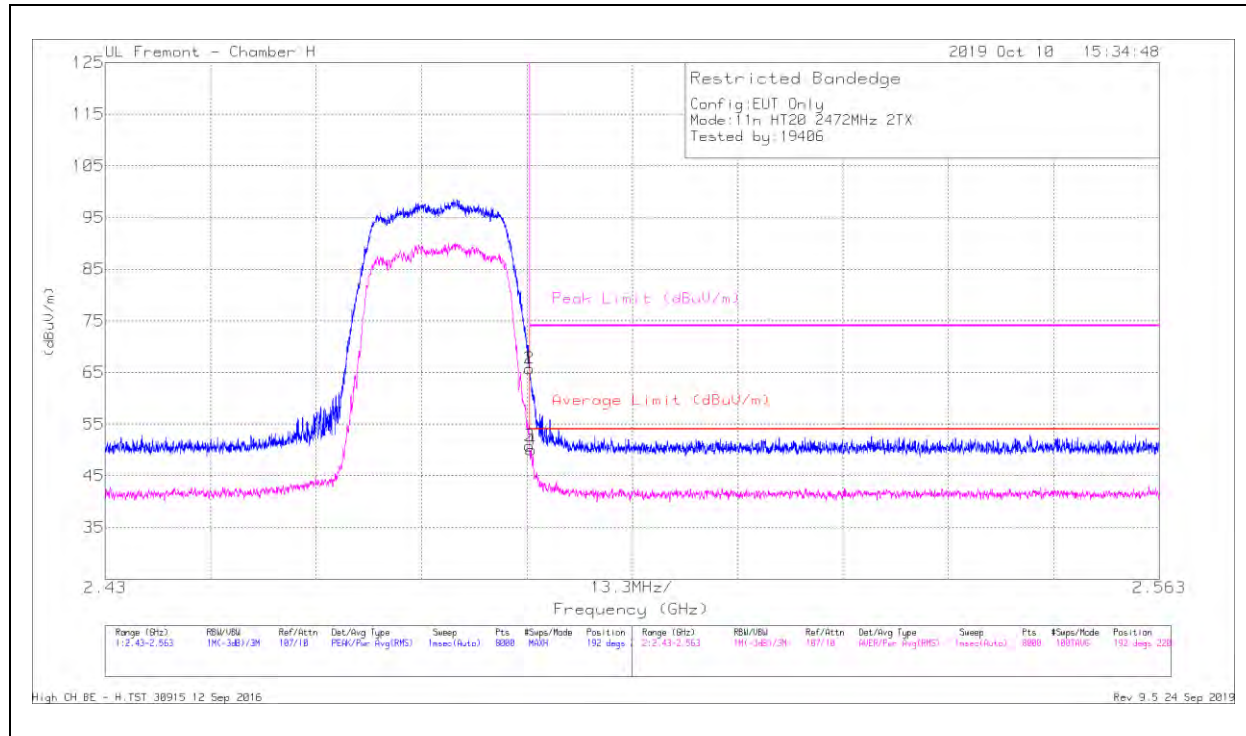

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.5	Pk	32.5	-23.3	65.7	-	-	74	-8.3	192	220	H
2	* 2.48352	56.59	Pk	32.5	-23.3	65.79	-	-	74	-8.21	192	220	H
3	* 2.48351	41.6	RMS	32.5	-23.3	50.8	54	-3.2	-	-	192	220	H
4	* 2.48374	40.83	RMS	32.5	-23.3	50.03	54	-3.97	-	-	192	220	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

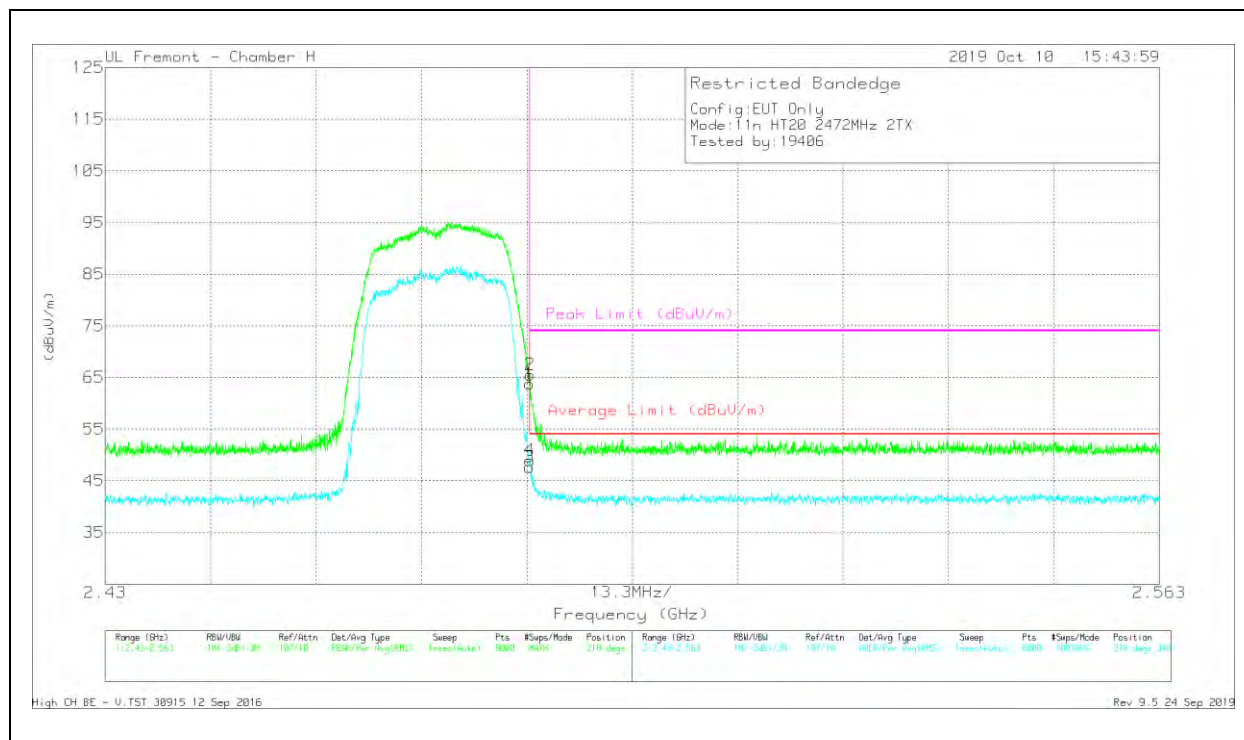

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	54.59	Pk	32.5	-23.3	63.79	-	-	74	-10.21	218	348	V
2	* 2.48359	56.32	Pk	32.5	-23.3	65.52	-	-	74	-8.48	218	348	V
3	* 2.48351	38.48	RMS	32.5	-23.3	47.68	54	-6.32	-	-	218	348	V
4	* 2.48357	39.78	RMS	32.5	-23.3	48.98	54	-5.02	-	-	218	348	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

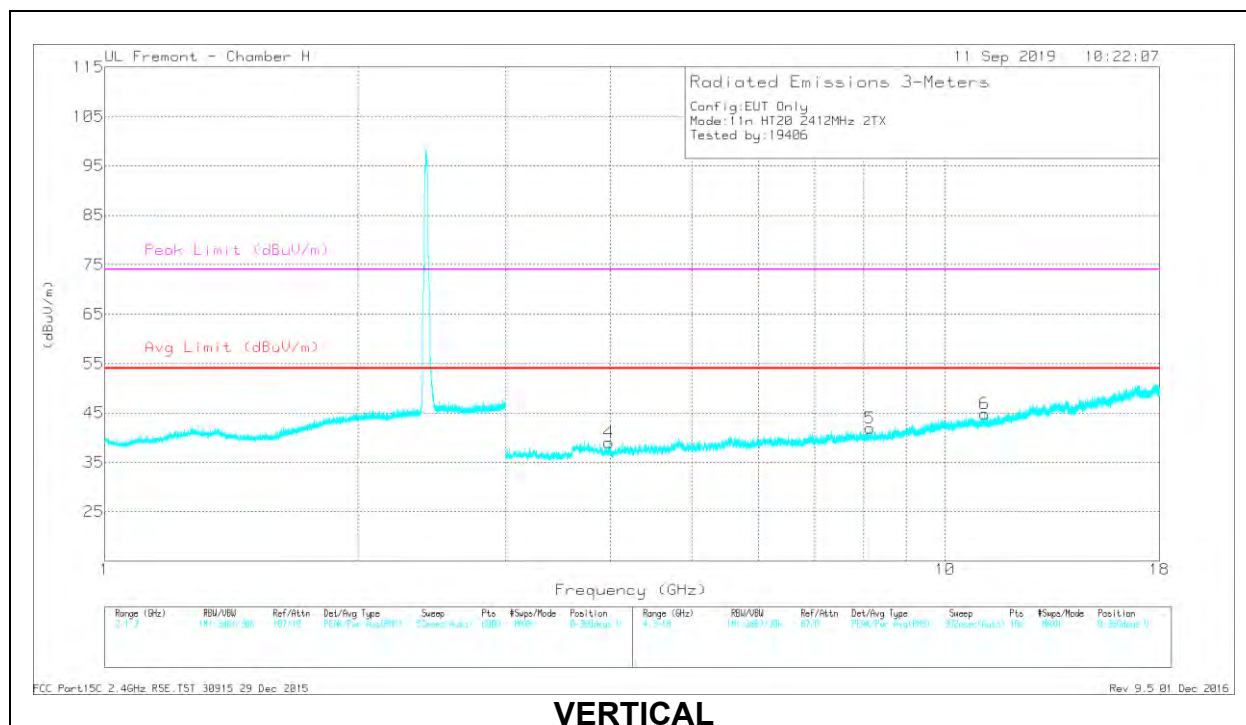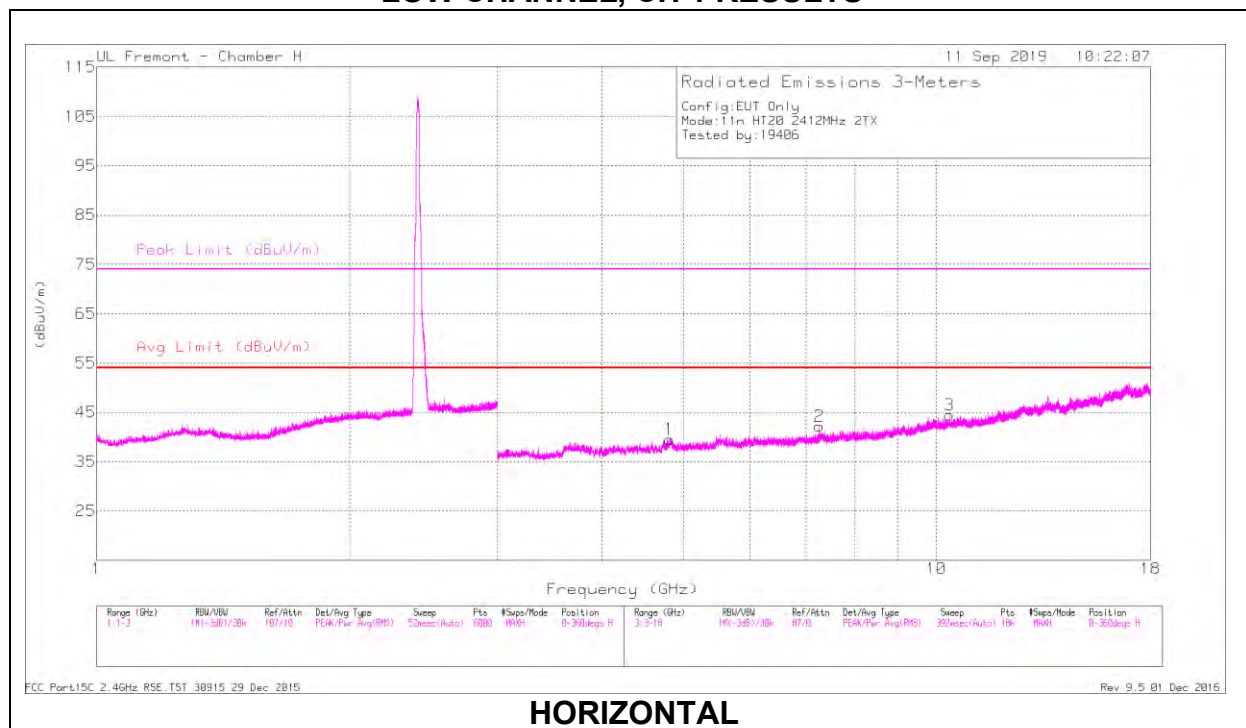

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.817	41.6	PK2	34.4	-30.3	45.7	-	-	74	-28.3	328	305	H
	* 4.817	29.87	MAv1	34.4	-30.3	33.97	54	-20.03	-	-	328	305	H
2	* 7.258	38.82	PK2	36	-27.2	47.62	-	-	74	-26.38	208	364	H
	* 7.258	27.16	MAv1	36	-27.2	35.96	54	-18.04	-	-	208	364	H
4	* 3.979	41.37	PK2	33.5	-29.8	45.07	-	-	74	-28.93	109	147	V
	* 3.981	29.35	MAv1	33.5	-29.9	32.95	54	-21.05	-	-	109	147	V
5	* 8.146	37.57	PK2	36	-26	47.57	-	-	74	-26.43	239	152	V
	* 8.147	26.27	MAv1	36	-26	36.27	54	-17.73	-	-	239	152	V
6	* 11.151	35.51	PK2	37.8	-22.7	50.61	-	-	74	-23.39	133	385	V
	* 11.153	24.23	MAv1	37.8	-22.8	39.23	54	-14.77	-	-	133	385	V
3	10.365	35.7	PK2	37.3	-23	50	-	-	-	-	39	363	H
	10.365	24.1	MAv1	37.3	-23	38.4	-	-	-	-	39	363	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

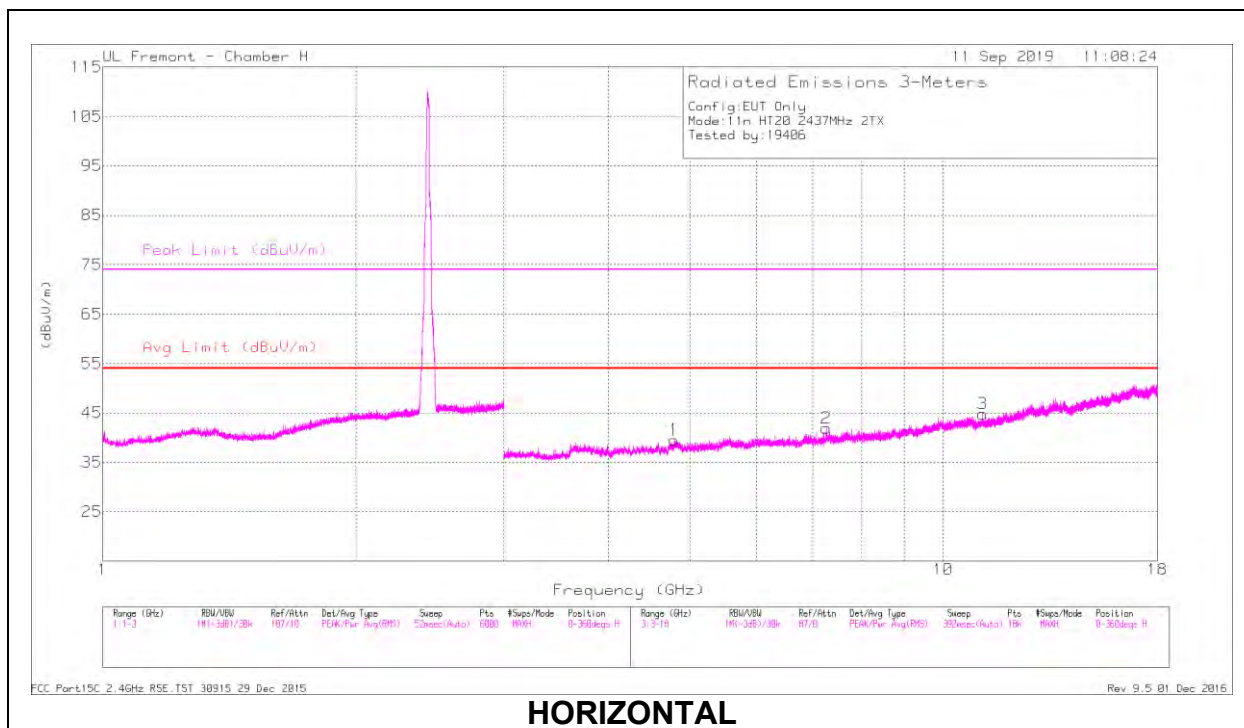

HORIZONTAL

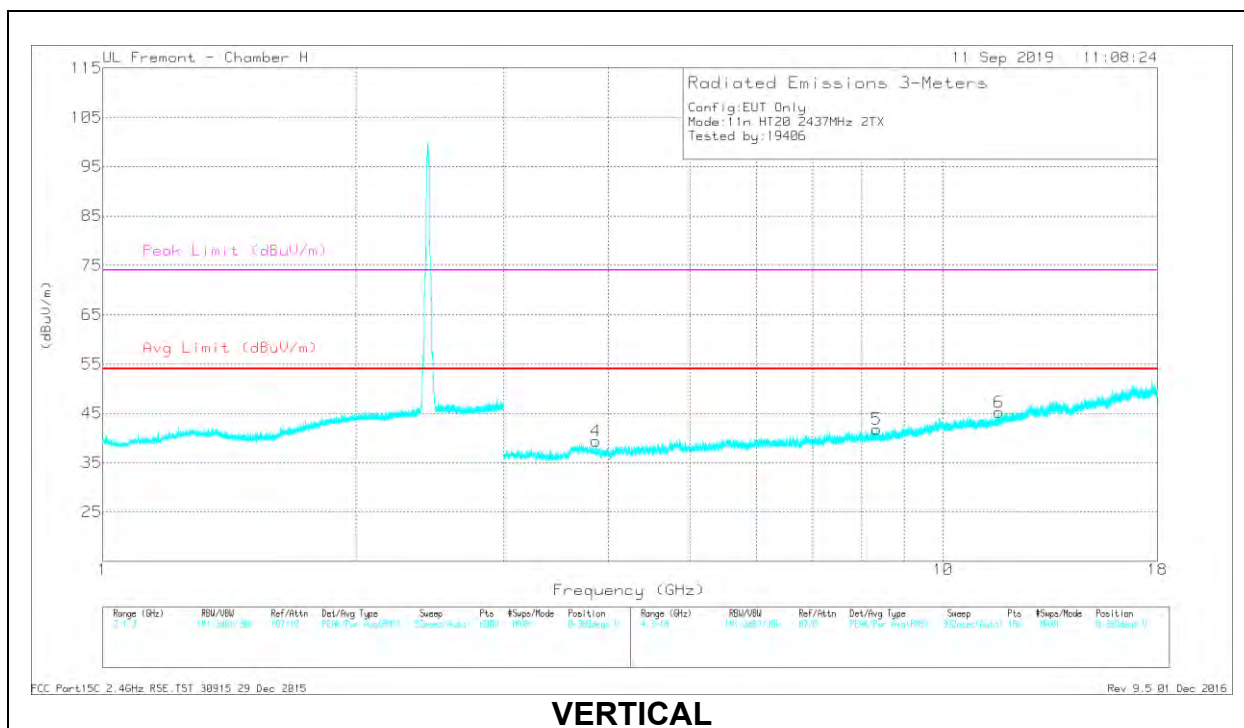

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.786	42.13	PK2	34.4	-30.2	46.33	-	-	74	-27.67	122	164	H
	* 4.786	30.33	MAv1	34.4	-30.2	34.53	54	-19.47	-	-	122	164	H
2	* 7.263	38.74	PK2	36	-27.1	47.64	-	-	74	-26.36	247	254	H
	* 7.262	27.14	MAv1	36	-27.1	36.04	54	-17.96	-	-	247	254	H
3	* 11.143	35.81	PK2	37.8	-22.8	50.81	-	-	74	-23.19	308	237	H
	* 11.142	24.13	MAv1	37.8	-22.8	39.13	54	-14.87	-	-	308	237	H
4	* 3.864	42.18	PK2	33.4	-30.6	44.98	-	-	74	-29.02	348	242	V
	* 3.864	30.26	MAv1	33.4	-30.6	33.06	54	-20.94	-	-	348	242	V
5	* 8.345	37.91	PK2	36	-25.7	48.21	-	-	74	-25.79	184	101	V
	* 8.346	26.04	MAv1	36	-25.7	36.34	54	-17.66	-	-	184	101	V
6	* 11.658	36.18	PK2	38.4	-23.2	51.38	-	-	74	-22.62	114	373	V
	* 11.659	24.15	MAv1	38.4	-23.2	39.35	54	-14.65	-	-	114	373	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

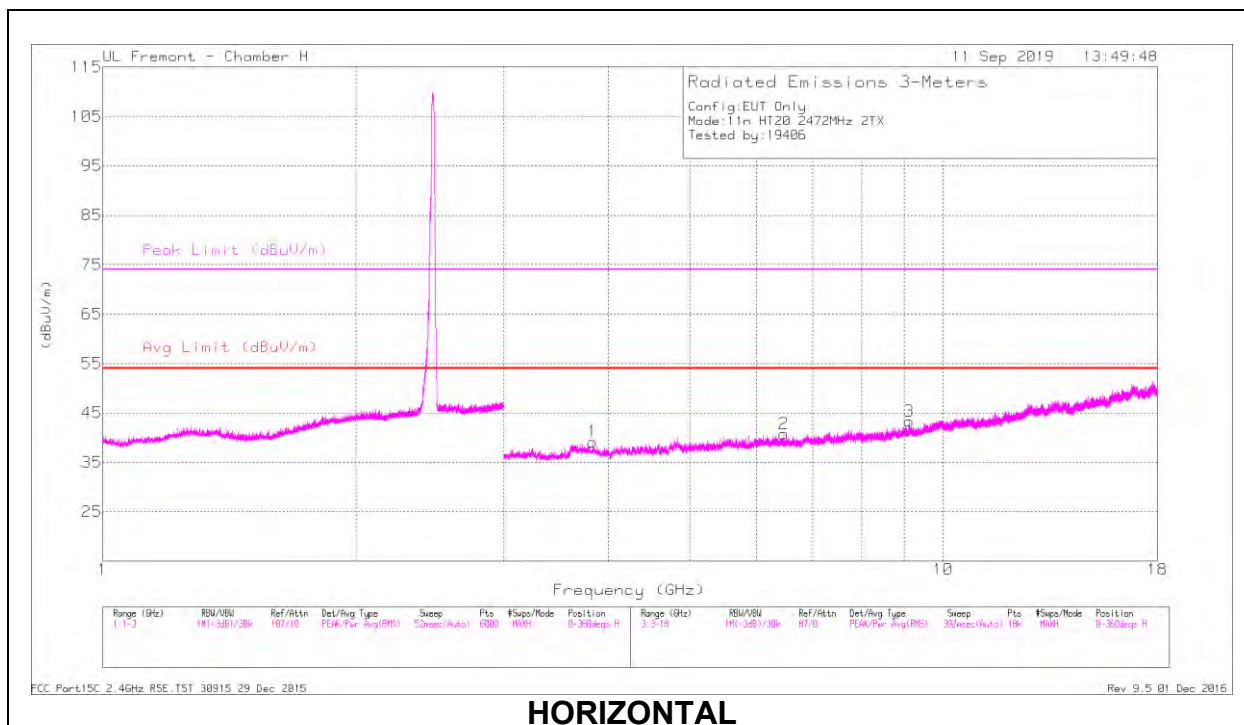

HORIZONTAL

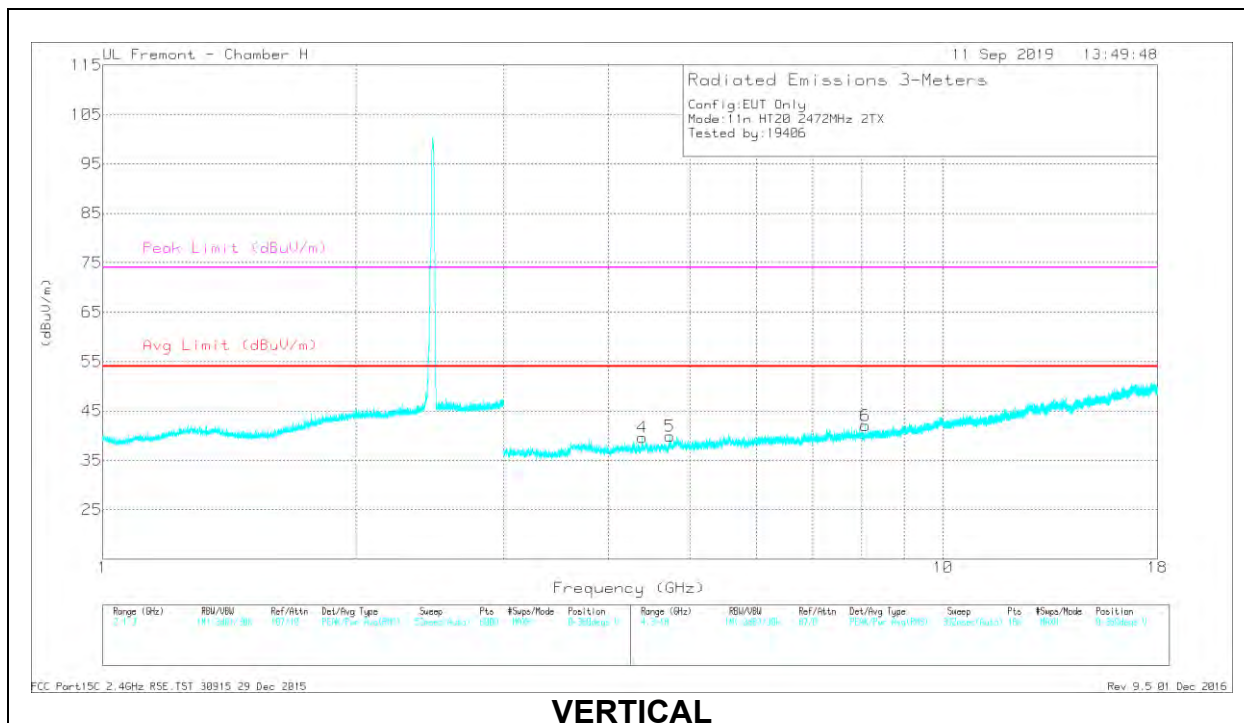

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.829	42.74	PK2	33.5	-30.9	45.34	-	-	74	-28.66	119	183	H
	* 3.83	30.95	MAv1	33.5	-30.8	33.65	54	-20.35	-	-	119	183	H
3	* 9.119	36.7	PK2	36.3	-23.7	49.3	-	-	74	-24.7	256	339	H
	* 9.122	24.81	MAv1	36.3	-23.8	37.31	54	-16.69	-	-	256	339	H
4	* 4.389	41.5	PK2	33.7	-29.9	45.3	-	-	74	-28.7	170	156	V
	* 4.39	29.5	MAv1	33.7	-29.9	33.3	54	-20.7	-	-	170	156	V
5	* 4.728	41.61	PK2	34.3	-30	45.91	-	-	74	-28.09	13	118	V
	* 4.726	30.12	MAv1	34.2	-30	34.32	54	-19.68	-	-	13	118	V
6	* 8.083	37.93	PK2	36.1	-26.4	47.63	-	-	74	-26.37	336	247	V
	* 8.085	26.47	MAv1	36.1	-26.4	36.17	54	-17.83	-	-	336	247	V
2	6.463	39	PK2	35.7	-28.1	46.6	-	-	-	-	90	172	H
	6.466	27.61	MAv1	35.7	-28.2	35.11	-	-	-	-	90	172	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

9.1.3. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 2.4 GHz BAND

UAT 1 LEGACY SISO MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

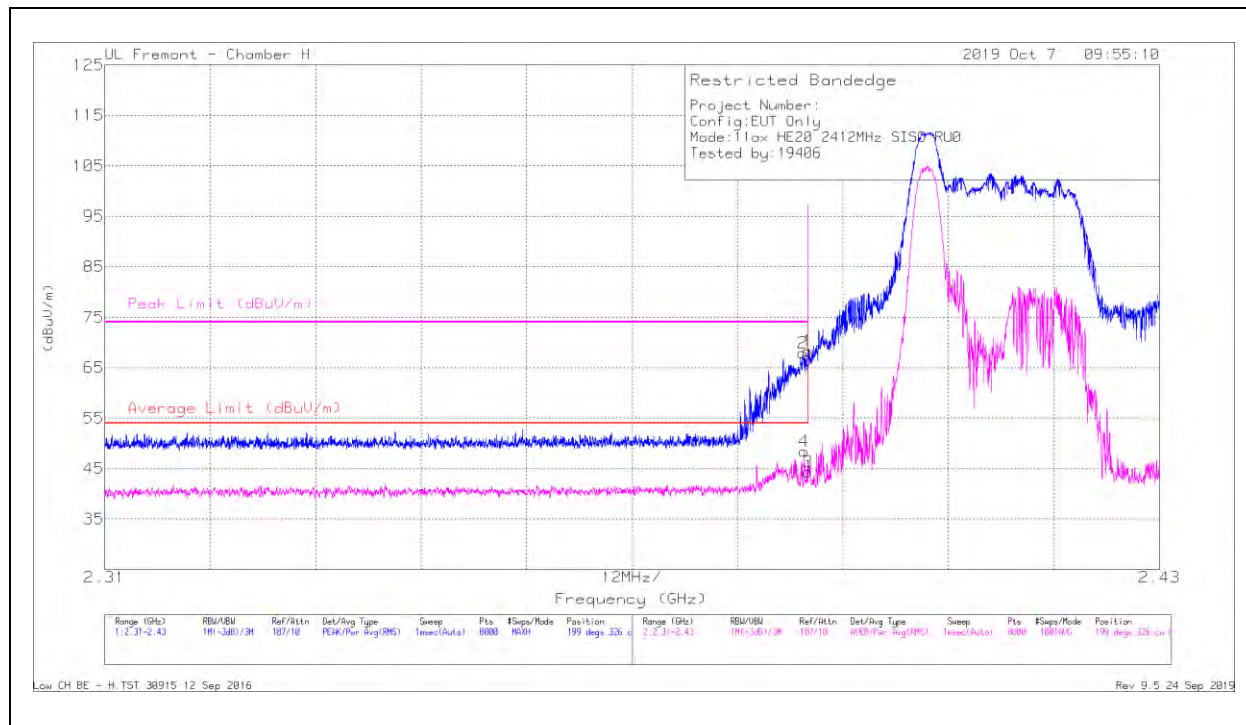

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	59.71	Pk	32.1	-23.5	68.31	-	-	74	-5.69	199	326	H
2	* 2.38944	59.31	Pk	32.1	-23.5	67.91	-	-	74	-6.09	199	326	H
3	* 2.38999	35.77	RMS	32.1	-23.5	44.37	54	-9.63	-	-	199	326	H
4	* 2.38957	39.87	RMS	32.1	-23.5	48.47	54	-5.53	-	-	199	326	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

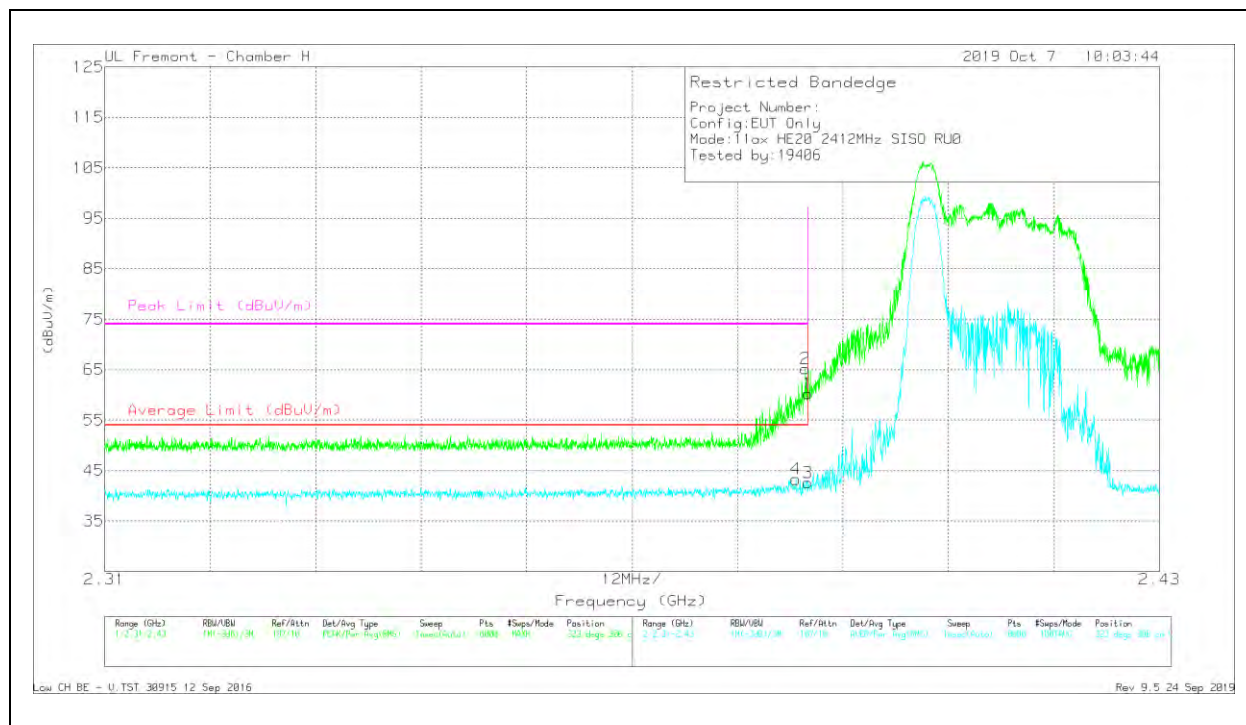

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	51.66	Pk	32.1	-23.5	60.26	-	-	74	-13.74	323	306	V
2	* 2.38972	56.62	Pk	32.1	-23.5	65.22	-	-	74	-8.78	323	306	V
3	* 2.38999	33.98	RMS	32.1	-23.5	42.58	54	-11.42	-	-	323	306	V
4	* 2.38866	34.68	RMS	32.1	-23.5	43.28	54	-10.72	-	-	323	306	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

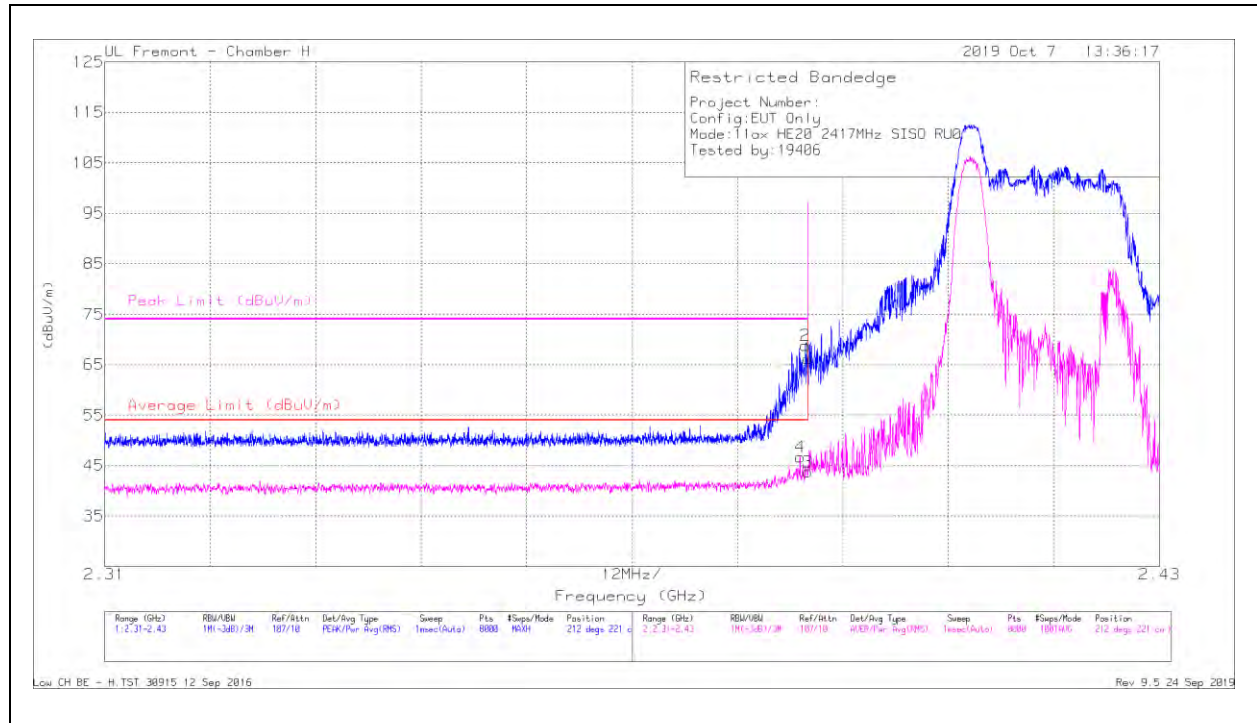

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	57.64	Pk	32.1	-23.5	66.24	-	-	74	-7.76	212	221	H
2	* 2.38971	60.15	Pk	32.1	-23.5	68.75	-	-	74	-5.25	212	221	H
3	* 2.38999	35.14	RMS	32.1	-23.5	43.74	54	-10.26	-	-	212	221	H
4	* 2.38911	38.1	RMS	32.1	-23.5	46.7	54	-7.3	-	-	212	221	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

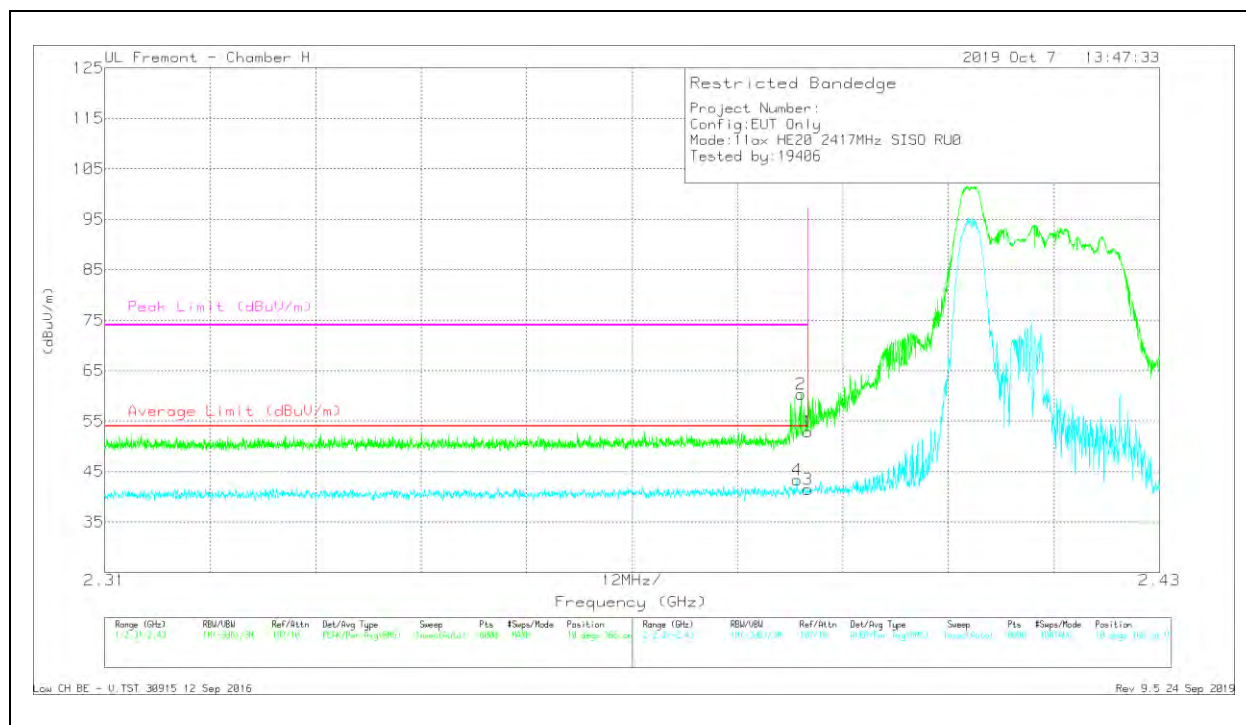


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CW/Filt/PA d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	44.31	Pk	32.1	-23.5	52.91	-	-	74	-21.09	10	166	V
2	* 2.38924	51.7	Pk	32.1	-23.5	60.3	-	-	74	-13.7	10	166	V
3	* 2.38999	32.9	RMS	32.1	-23.5	41.5	54	-12.5	-	-	10	166	V
4	* 2.38876	34.73	RMS	32.1	-23.5	43.33	54	-10.67	-	-	10	166	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

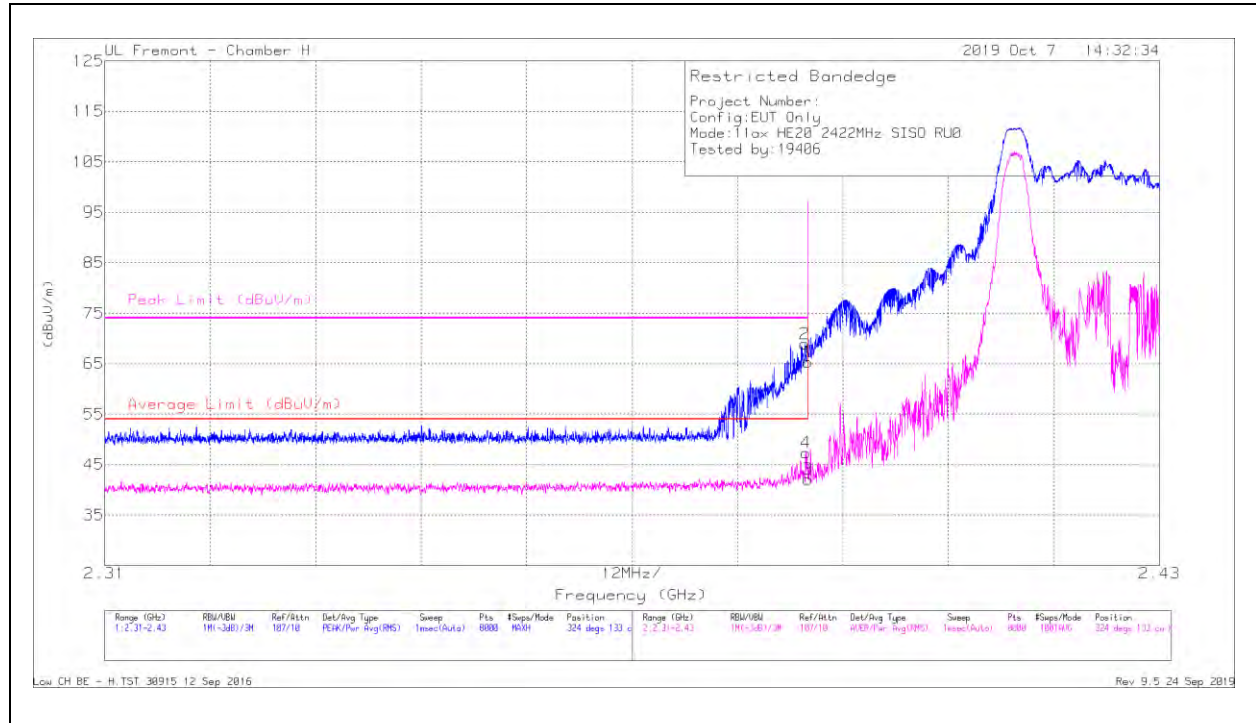

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	56.75	Pk	32.1	-23.5	65.35	-	-	74	-8.65	324	133	H
2	* 2.38966	60.37	Pk	32.1	-23.5	68.97	-	-	74	-5.03	324	133	H
3	* 2.38999	33.48	RMS	32.1	-23.5	42.08	54	-11.92	-	-	324	133	H
4	* 2.38975	38.77	RMS	32.1	-23.5	47.37	54	-6.63	-	-	324	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

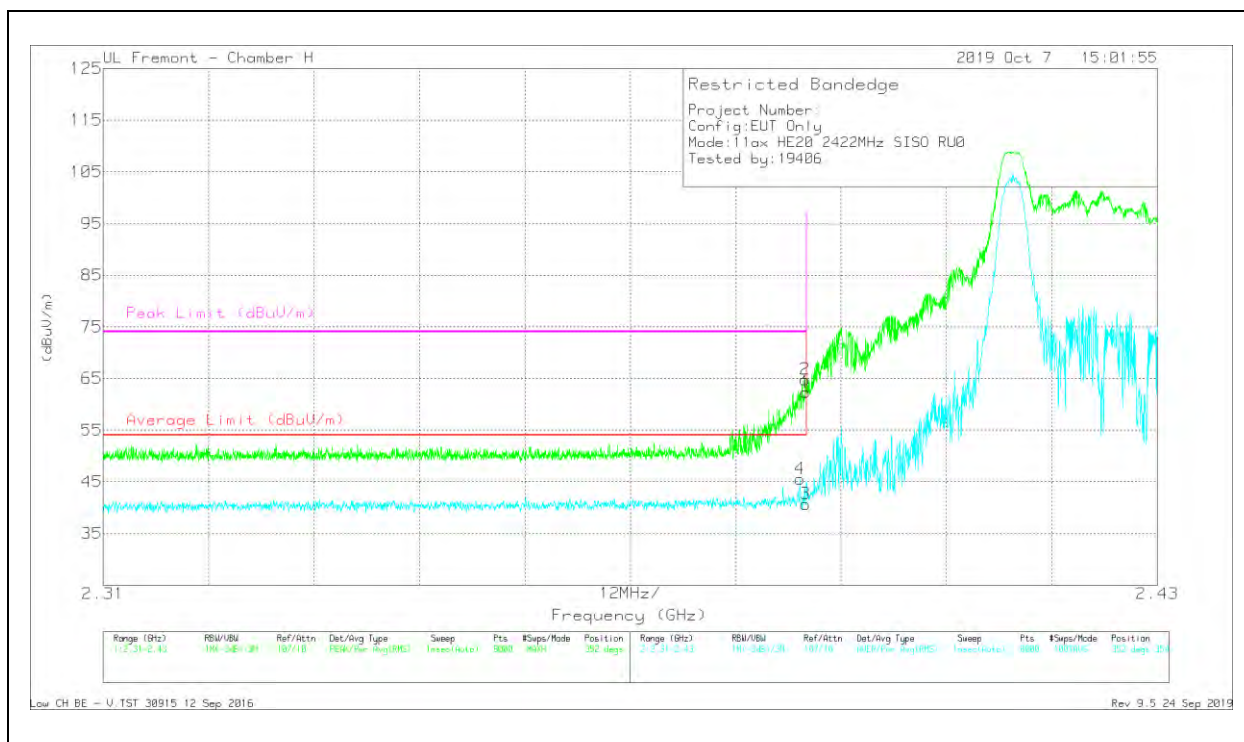

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	53.77	Pk	32.1	-23.5	62.37	-	-	74	-11.63	352	354	V
2	* 2.3899	56.22	Pk	32.1	-23.5	64.82	-	-	74	-9.18	352	354	V
3	* 2.38999	32.12	RMS	32.1	-23.5	40.72	54	-13.28	-	-	352	354	V
4	* 2.38932	36.97	RMS	32.1	-23.5	45.57	54	-8.43	-	-	352	354	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

UAT 1 LEGACY SISO MODE: 26-Tones, RU Index 8

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

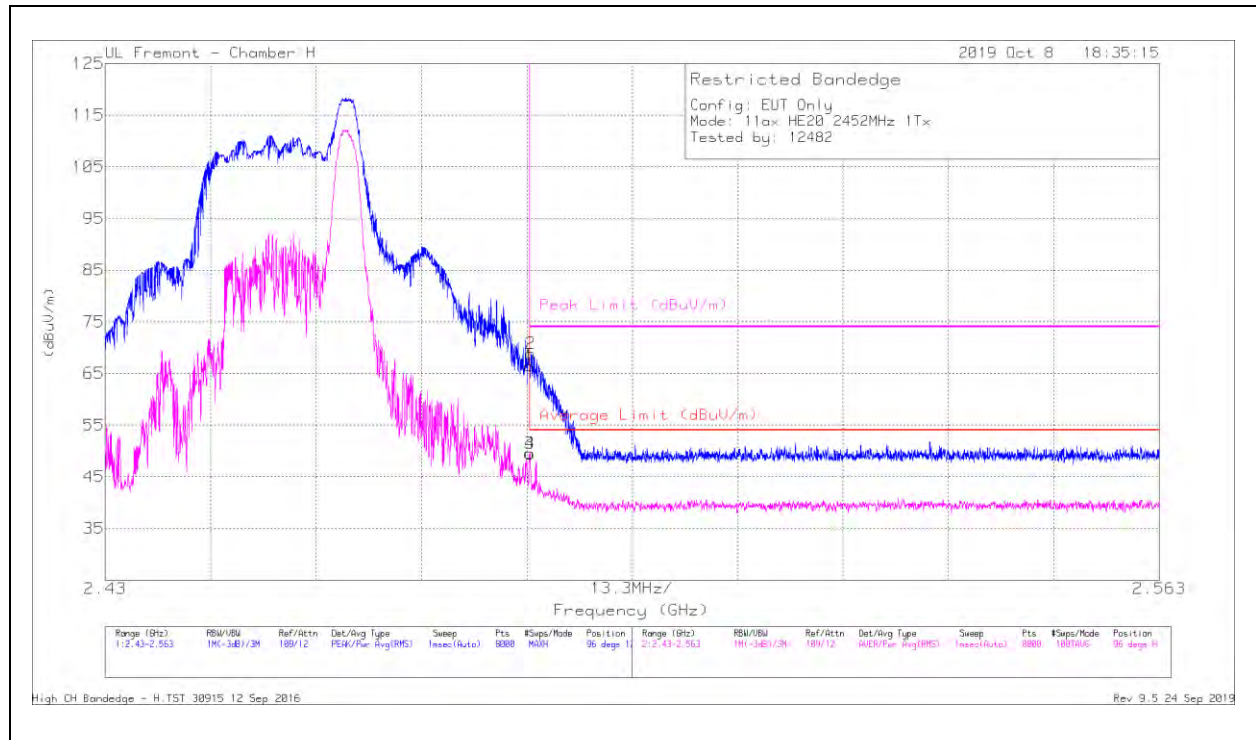


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	55.43	Pk	32.5	-21.5	66.43	-	-	74	-7.57	96	121	H
2	* 2.48369	57.85	Pk	32.5	-21.5	68.85	-	-	74	-5.15	96	121	H
3	* 2.48351	38.54	RMS	32.5	-21.5	49.54	54	-4.46	-	-	96	121	H
4	* 2.48359	38.49	RMS	32.5	-21.5	49.49	54	-4.51	-	-	96	121	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

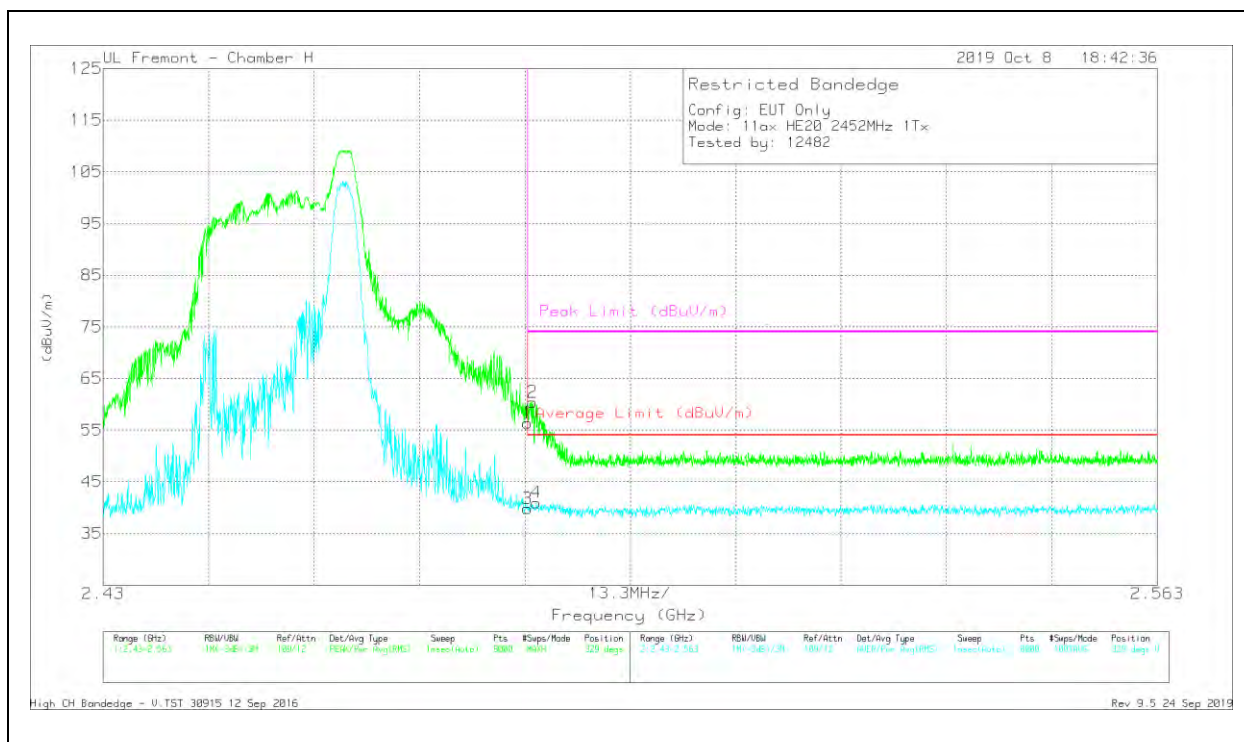

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	45.37	Pk	32.5	-21.5	56.37	-	-	74	-17.63	329	399	V
2	* 2.48419	49.39	Pk	32.5	-21.5	60.39	-	-	74	-13.61	329	399	V
3	* 2.48351	28.79	RMS	32.5	-21.5	39.79	54	-14.21	-	-	329	399	V
4	* 2.48464	29.96	RMS	32.5	-21.5	40.96	54	-13.04	-	-	329	399	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

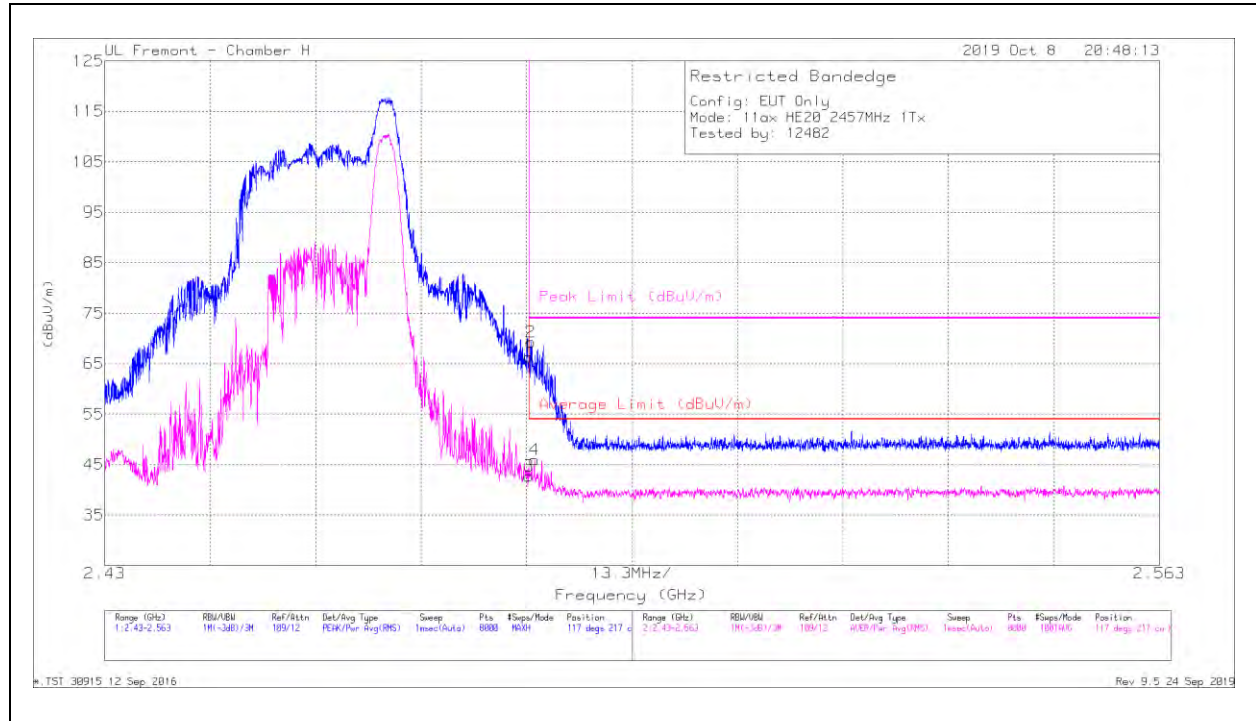


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	55.31	Pk	32.5	-21.5	66.31	-	-	74	-7.69	117	217	H
2	* 2.48372	58.29	Pk	32.5	-21.5	69.29	-	-	74	-4.71	117	217	H
3	* 2.48351	31.76	RMS	32.5	-21.5	42.76	54	-11.24	-	-	117	217	H
4	* 2.48419	34.91	RMS	32.5	-21.5	45.91	54	-8.09	-	-	117	217	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

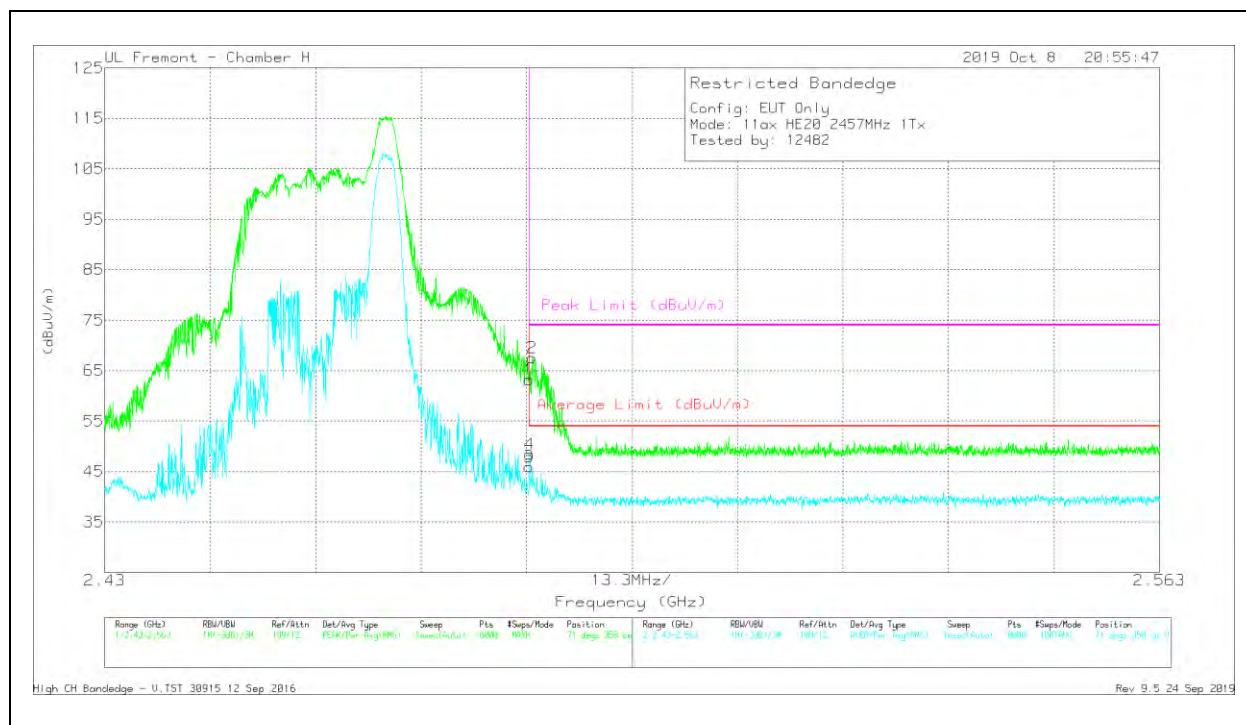


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	52.19	Pk	32.5	-21.5	63.19	-	-	74	-10.81	71	358	V
2	* 2.48387	56.51	Pk	32.5	-21.5	67.51	-	-	74	-6.49	71	358	V
3	* 2.48351	34.98	RMS	32.5	-21.5	45.98	54	-8.02	-	-	71	358	V
4	* 2.48359	37.41	RMS	32.5	-21.5	48.41	54	-5.59	-	-	71	358	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

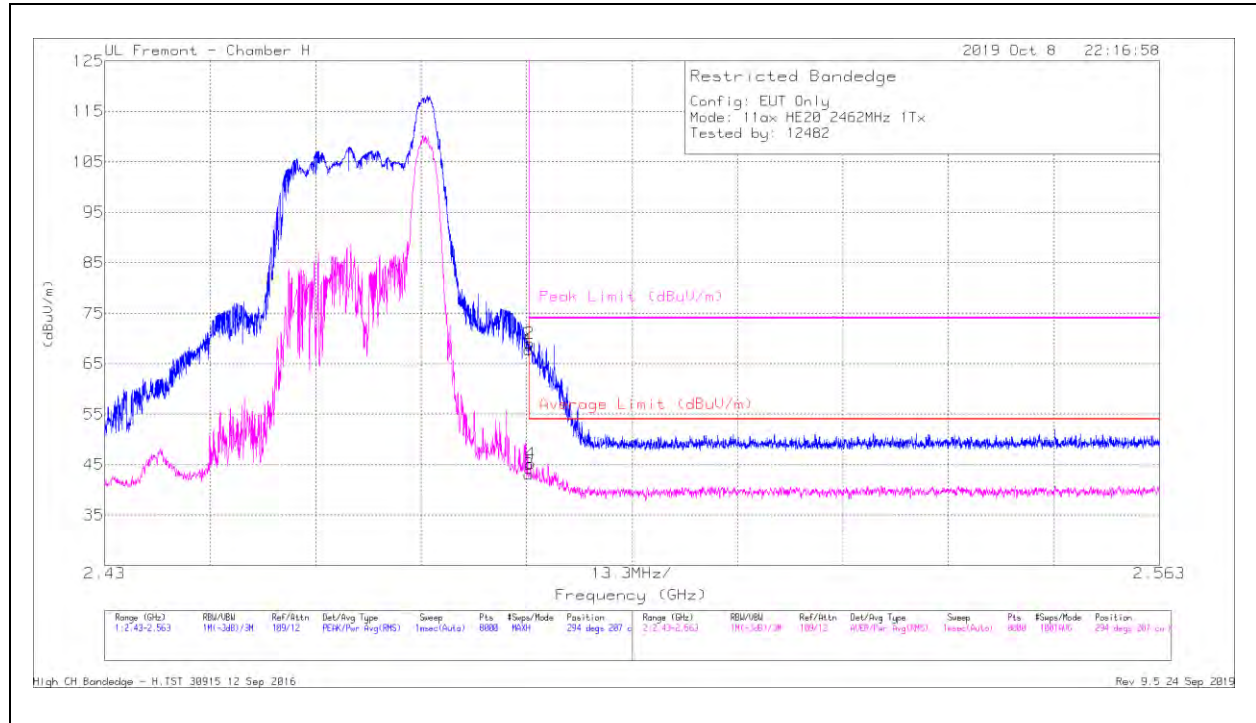


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.85	Pk	32.5	-21.5	67.85	-	-	74	-6.15	294	207	H
2	* 2.48361	58.09	Pk	32.5	-21.5	69.09	-	-	74	-4.91	294	207	H
3	* 2.48351	32.09	RMS	32.5	-21.5	43.09	54	-10.91	-	-	294	207	H
4	* 2.48372	34.15	RMS	32.5	-21.5	45.15	54	-8.85	-	-	294	207	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

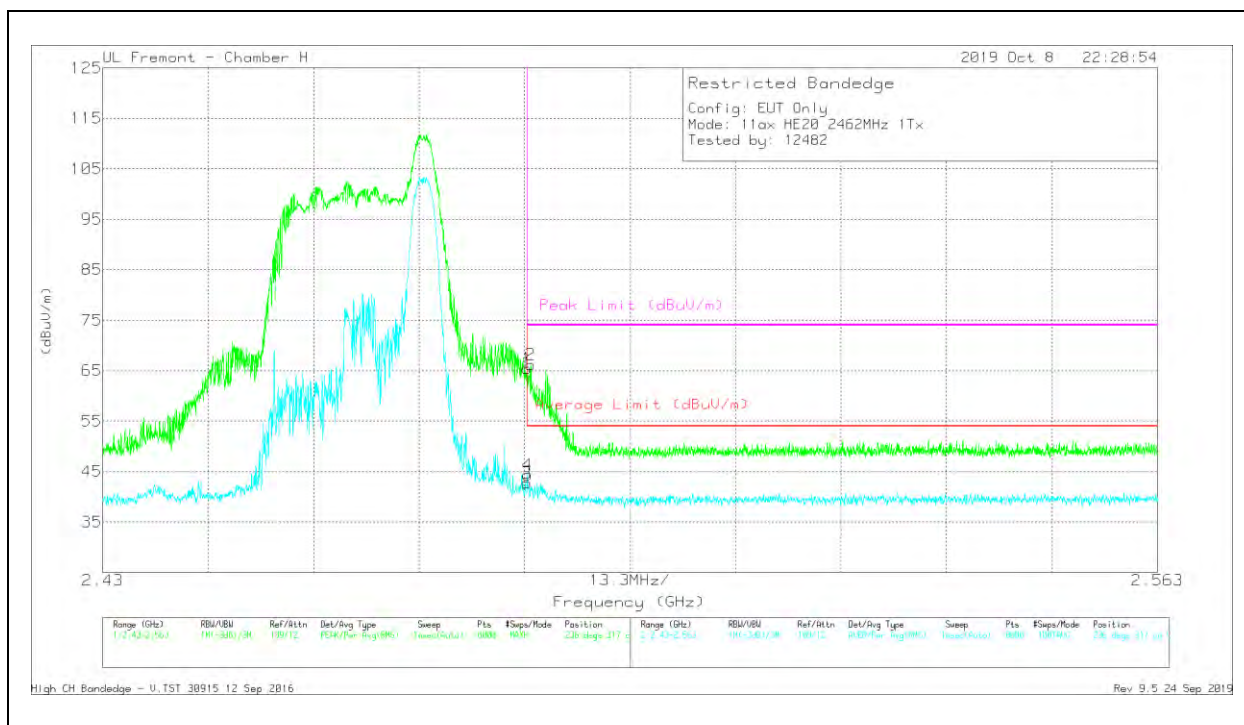

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CbW/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	54.46	Pk	32.5	-21.5	65.46	-	-	74	-8.54	236	317	V
2	* 2.484	55.23	Pk	32.5	-21.5	66.23	-	-	74	-7.77	236	317	V
3	* 2.48351	31.74	RMS	32.5	-21.5	42.74	54	-11.26	-	-	236	317	V
4	* 2.48356	33.33	RMS	32.5	-21.5	44.33	54	-9.67	-	-	236	317	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

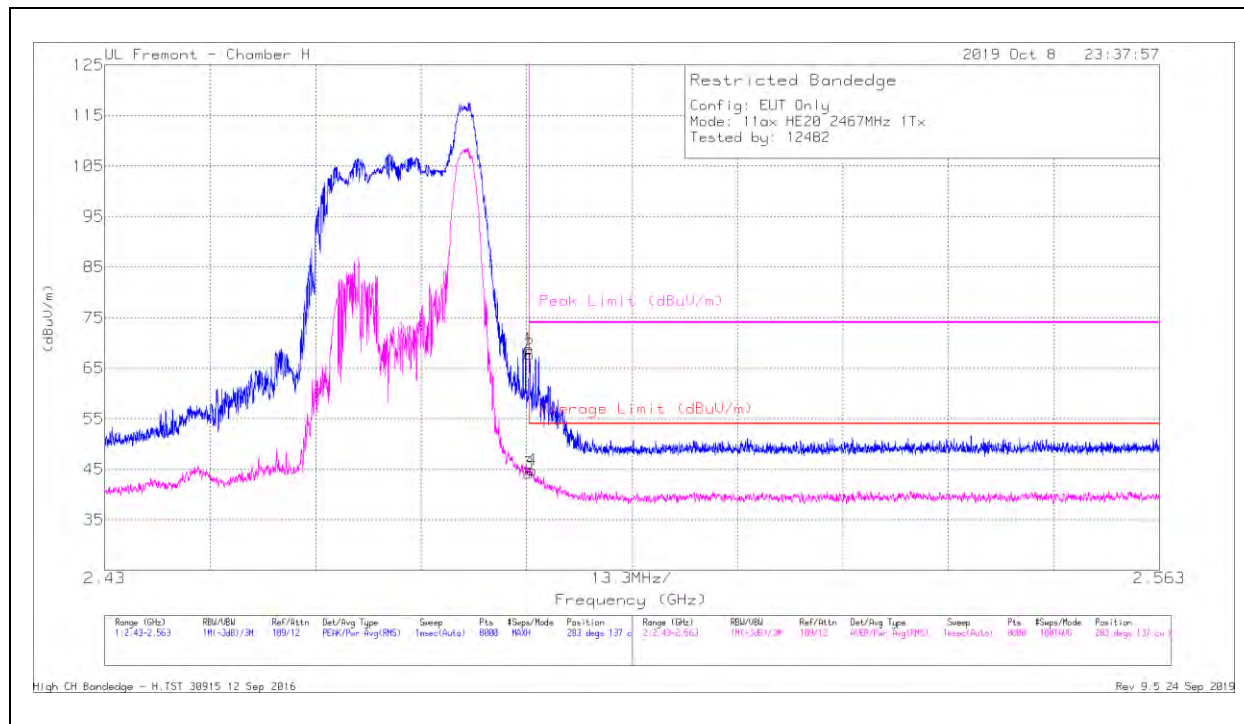


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	57.83	Pk	32.5	-21.5	68.83	-	-	74	-5.17	283	137	H
2	* 2.48359	56.68	Pk	32.5	-21.5	67.68	-	-	74	-6.32	283	137	H
3	* 2.48351	33.2	RMS	32.5	-21.5	44.2	54	-9.8	-	-	283	137	H
4	* 2.48387	33.88	RMS	32.5	-21.5	44.88	54	-9.12	-	-	283	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

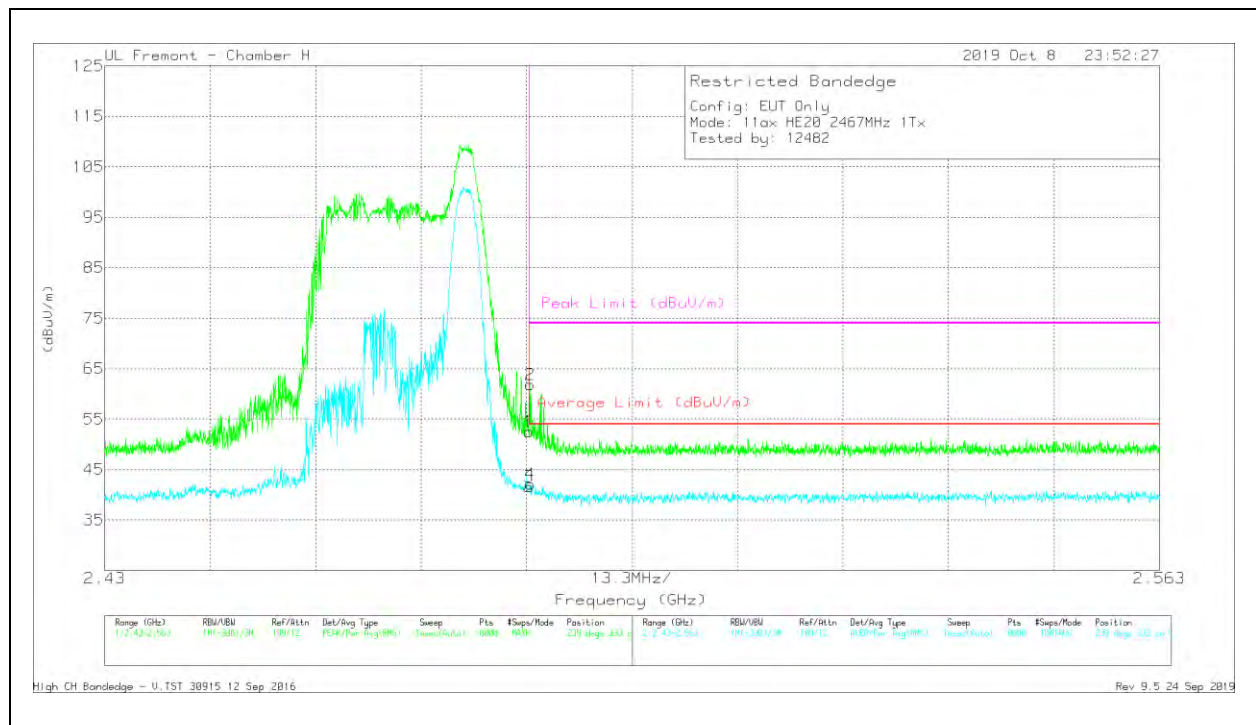


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.47	Pk	32.5	-21.5	52.47	-	-	74	-21.53	239	333	V
2	* 2.48364	50.86	Pk	32.5	-21.5	61.86	-	-	74	-12.14	239	333	V
3	* 2.48351	30.61	RMS	32.5	-21.5	41.61	54	-12.39	-	-	239	333	V
4	* 2.48369	31.11	RMS	32.5	-21.5	42.11	54	-11.89	-	-	239	333	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

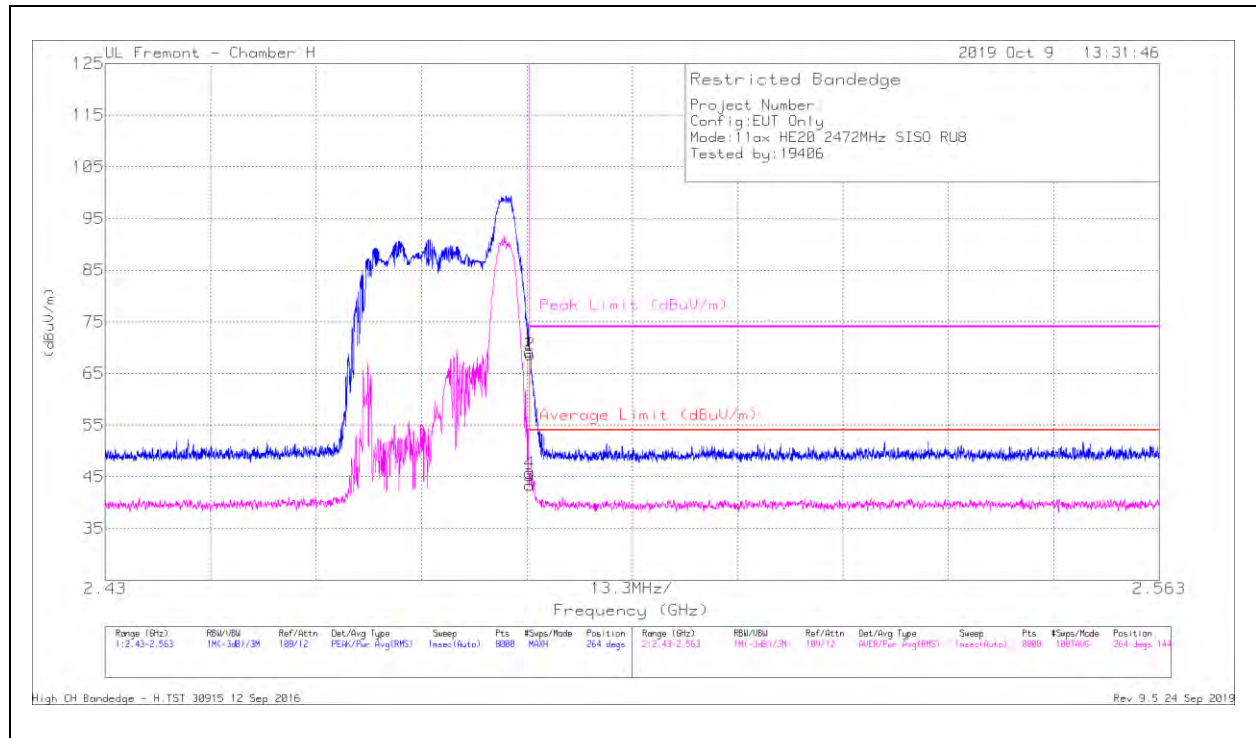


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	58.22	Pk	32.5	-21.5	69.22	-	-	74	-4.78	264	144	H
2	* 2.48359	57.7	Pk	32.5	-21.5	68.7	-	-	74	-5.3	264	144	H
3	* 2.48351	32.32	RMS	32.5	-21.5	43.32	54	-10.68	-	-	264	144	H
4	* 2.48357	34.74	RMS	32.5	-21.5	45.74	54	-8.26	-	-	264	144	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

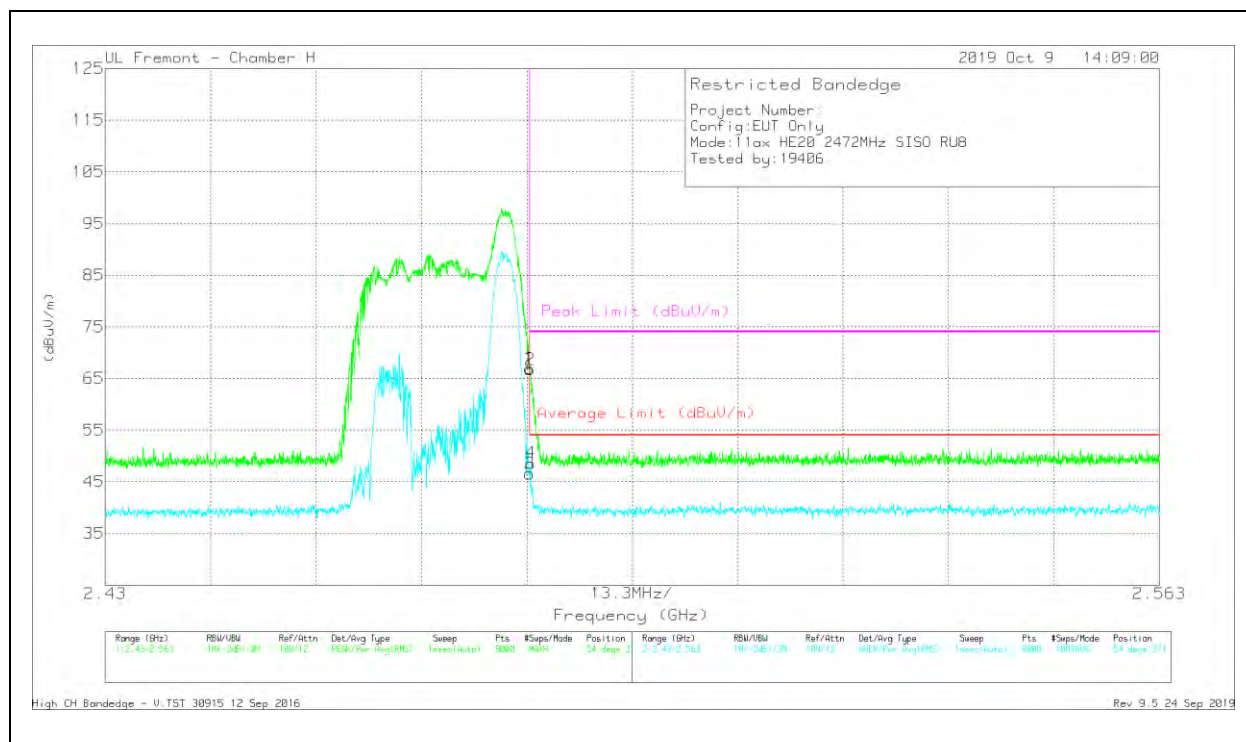

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	55.95	Pk	32.5	-21.5	66.95	-	-	74	-7.05	54	371	V
2	* 2.48362	55.71	Pk	32.5	-21.5	66.71	-	-	74	-7.29	54	371	V
3	* 2.48351	35.58	RMS	32.5	-21.5	46.58	54	-7.42	-	-	54	371	V
4	* 2.48367	37.61	RMS	32.5	-21.5	48.61	54	-5.39	-	-	54	371	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

LAT 3 LEGACY SISO MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

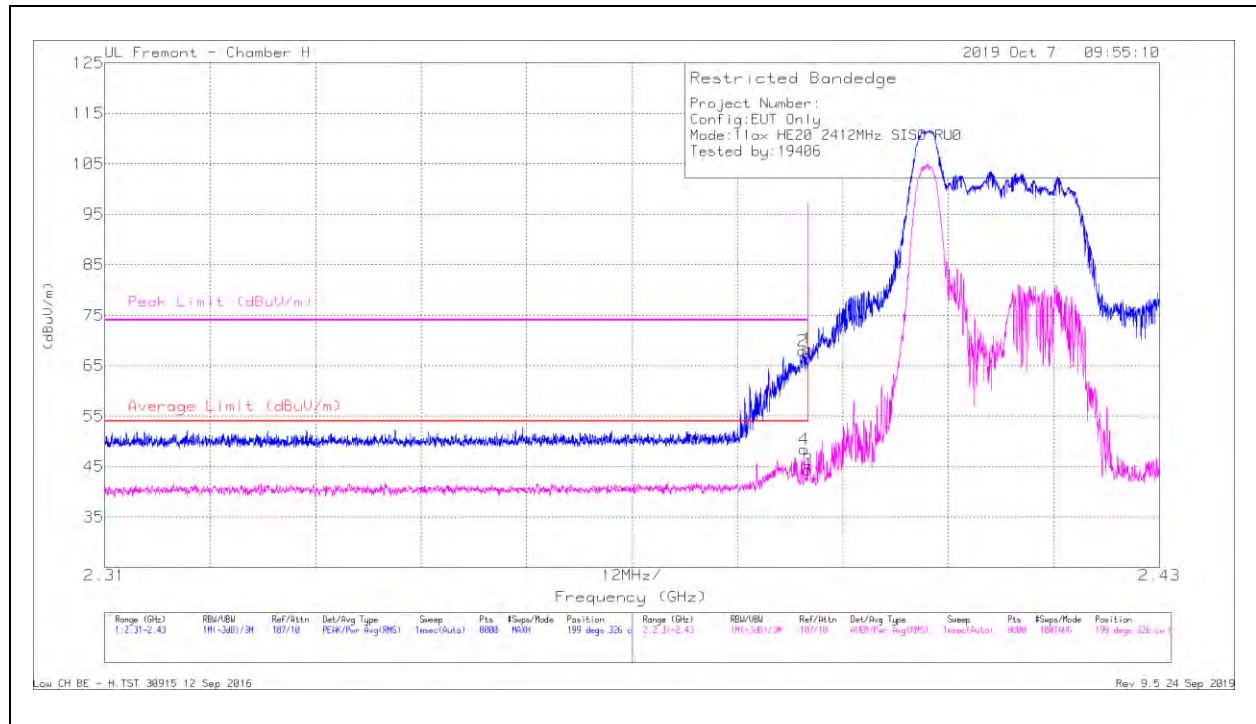


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	59.71	Pk	32.1	-23.5	68.31	-	-	74	-5.69	199	326	H
2	* 2.38944	59.31	Pk	32.1	-23.5	67.91	-	-	74	-6.09	199	326	H
3	* 2.38999	35.77	RMS	32.1	-23.5	44.37	54	-9.63	-	-	199	326	H
4	* 2.38957	39.87	RMS	32.1	-23.5	48.47	54	-5.53	-	-	199	326	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

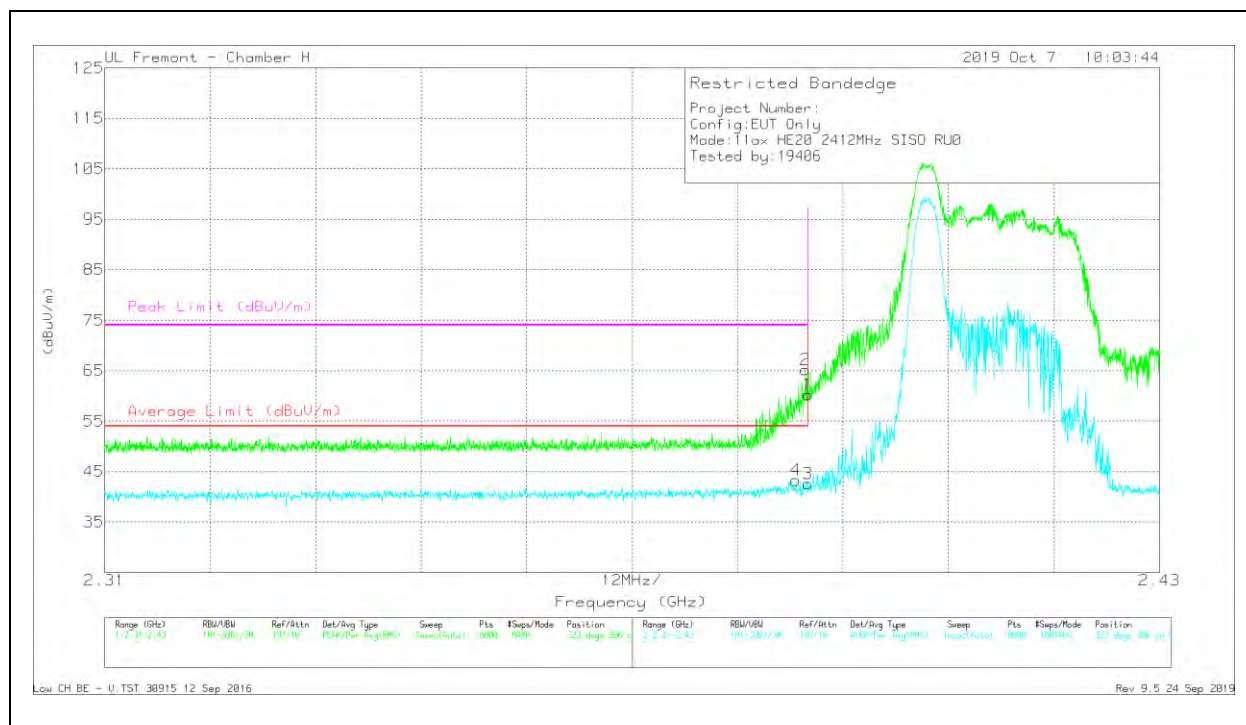

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Chl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	51.66	Pk	32.1	-23.5	60.26	-	-	74	-13.74	323	306	V
2	* 2.38972	56.62	Pk	32.1	-23.5	65.22	-	-	74	-8.78	323	306	V
3	* 2.38999	33.98	RMS	32.1	-23.5	42.58	54	-11.42	-	-	323	306	V
4	* 2.38866	34.68	RMS	32.1	-23.5	43.28	54	-10.72	-	-	323	306	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

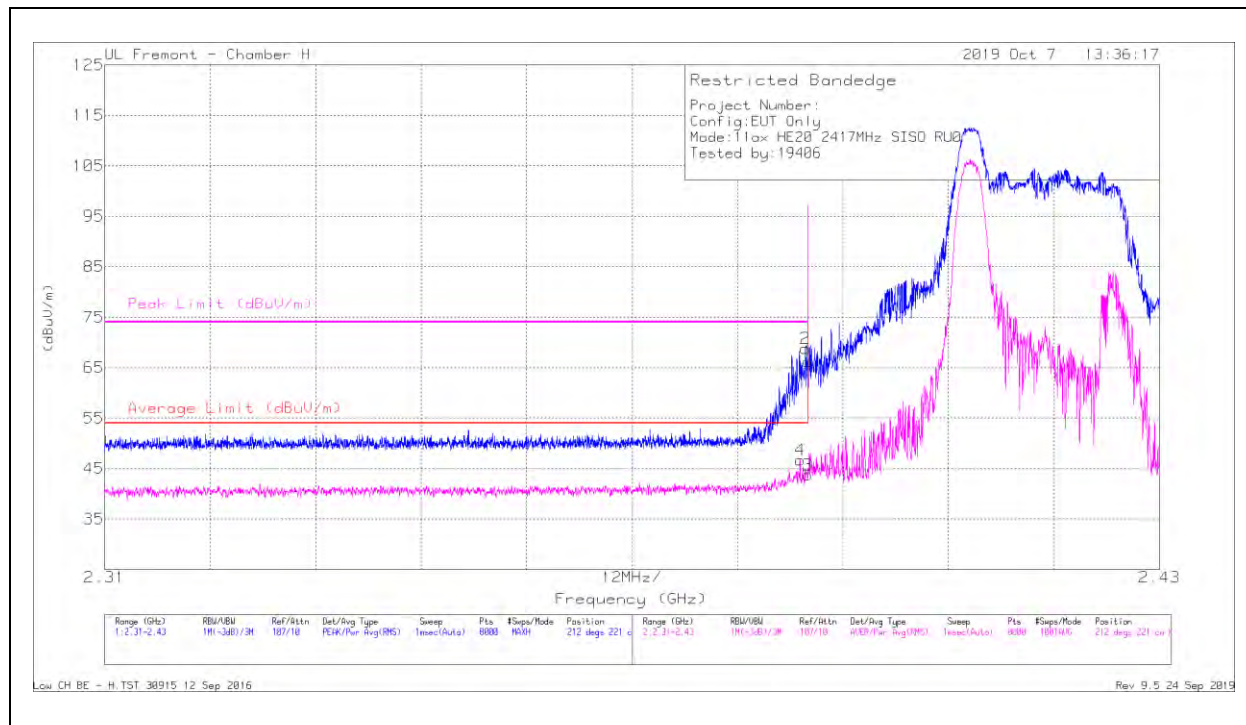

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	57.64	Pk	32.1	-23.5	66.24	-	-	74	-7.76	212	221	H
2	* 2.38971	60.15	Pk	32.1	-23.5	68.75	-	-	74	-5.25	212	221	H
3	* 2.38999	35.14	RMS	32.1	-23.5	43.74	54	-10.26	-	-	212	221	H
4	* 2.38911	38.1	RMS	32.1	-23.5	46.7	54	-7.3	-	-	212	221	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

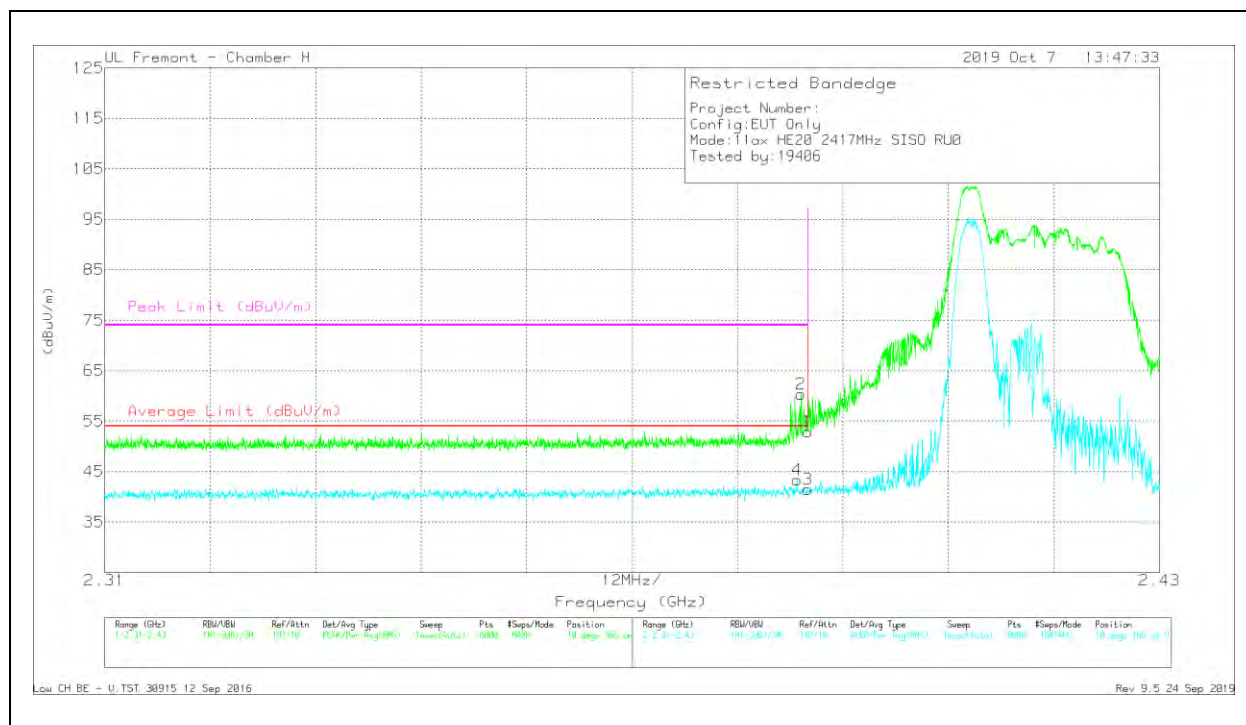


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CbW/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	44.31	Pk	32.1	-23.5	52.91	-	-	74	-21.09	10	166	V
2	* 2.38924	51.7	Pk	32.1	-23.5	60.3	-	-	74	-13.7	10	166	V
3	* 2.38999	32.9	RMS	32.1	-23.5	41.5	54	-12.5	-	-	10	166	V
4	* 2.38876	34.73	RMS	32.1	-23.5	43.33	54	-10.67	-	-	10	166	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

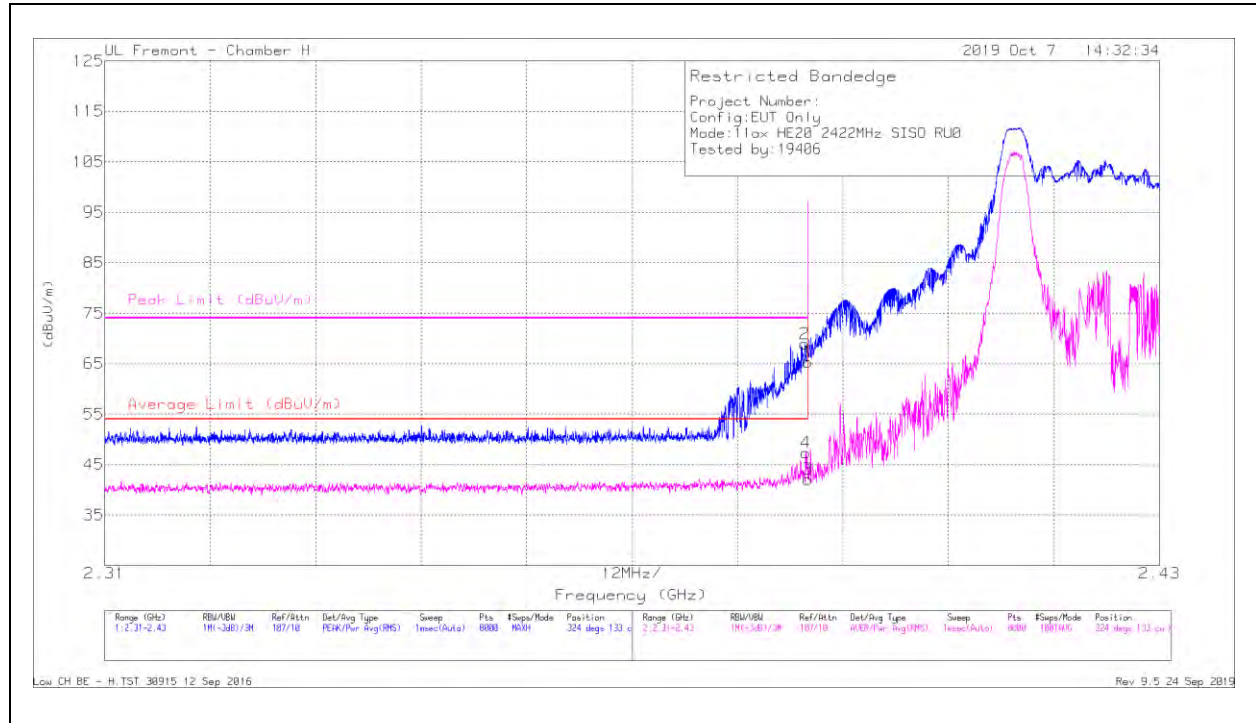

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	56.75	Pk	32.1	-23.5	65.35	-	-	74	-8.65	324	133	H
2	* 2.38966	60.37	Pk	32.1	-23.5	68.97	-	-	74	-5.03	324	133	H
3	* 2.38999	33.48	RMS	32.1	-23.5	42.08	54	-11.92	-	-	324	133	H
4	* 2.38975	38.77	RMS	32.1	-23.5	47.37	54	-6.63	-	-	324	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

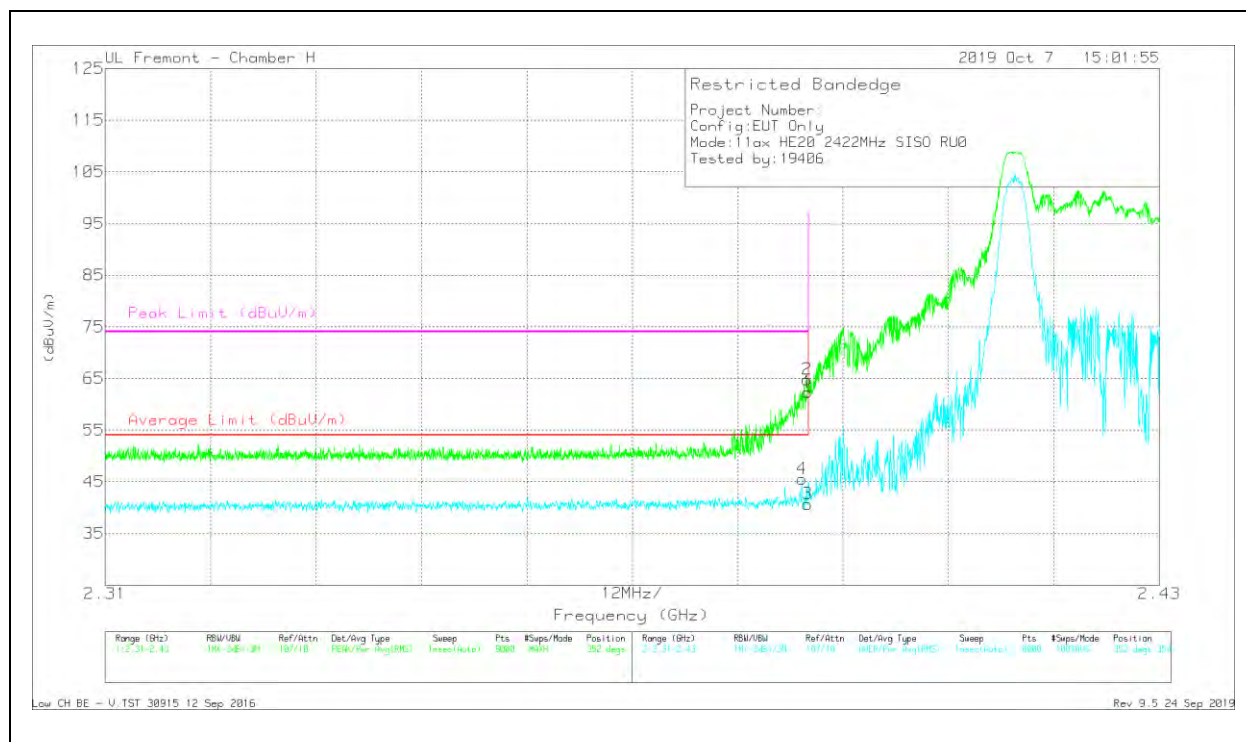

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	53.77	Pk	32.1	-23.5	62.37	-	-	74	-11.63	352	354	V
2	* 2.3899	56.22	Pk	32.1	-23.5	64.82	-	-	74	-9.18	352	354	V
3	* 2.38999	32.12	RMS	32.1	-23.5	40.72	54	-13.28	-	-	352	354	V
4	* 2.38932	36.97	RMS	32.1	-23.5	45.57	54	-8.43	-	-	352	354	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

LAT 3 LEGACY SISO MODE: 26-Tones, RU Index 8
BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

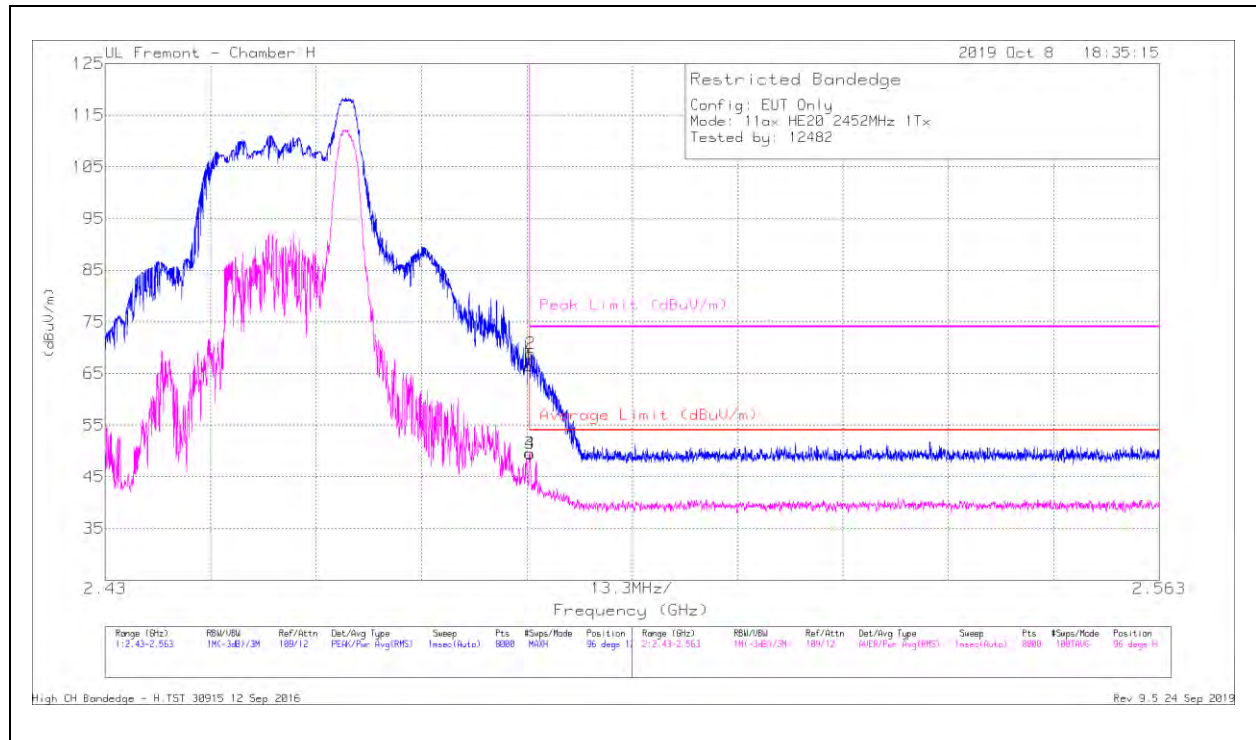

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	55.43	Pk	32.5	-21.5	66.43	-	-	74	-7.57	96	121	H
2	* 2.48369	57.85	Pk	32.5	-21.5	68.85	-	-	74	-5.15	96	121	H
3	* 2.48351	38.54	RMS	32.5	-21.5	49.54	54	-4.46	-	-	96	121	H
4	* 2.48359	38.49	RMS	32.5	-21.5	49.49	54	-4.51	-	-	96	121	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

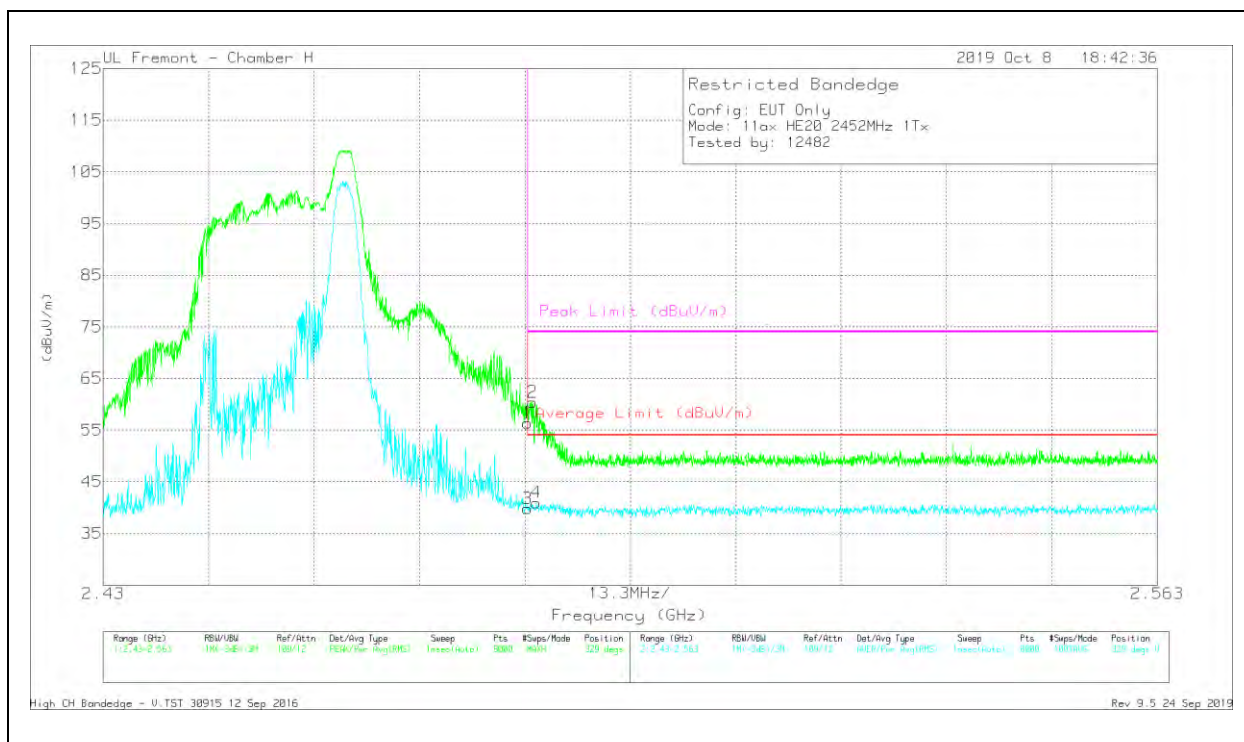

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	45.37	Pk	32.5	-21.5	56.37	-	-	74	-17.63	329	399	V
2	* 2.48419	49.39	Pk	32.5	-21.5	60.39	-	-	74	-13.61	329	399	V
3	* 2.48351	28.79	RMS	32.5	-21.5	39.79	54	-14.21	-	-	329	399	V
4	* 2.48464	29.96	RMS	32.5	-21.5	40.96	54	-13.04	-	-	329	399	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

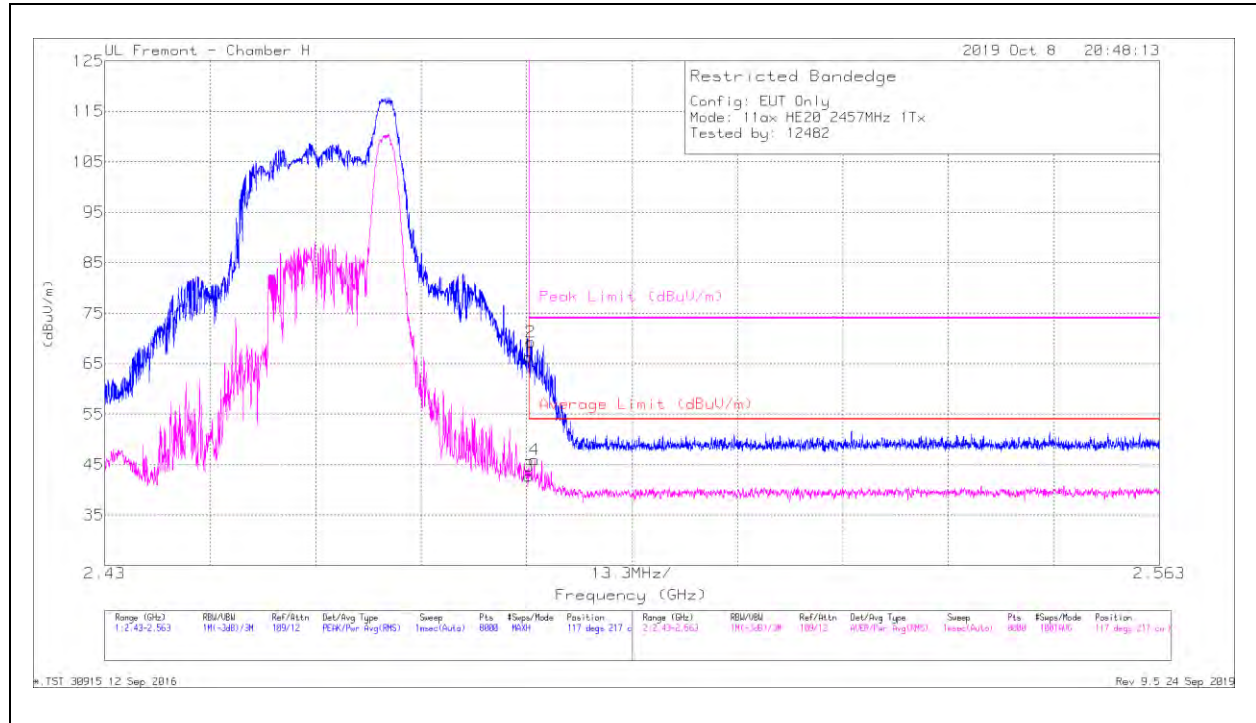


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	55.31	Pk	32.5	-21.5	66.31	-	-	74	-7.69	117	217	H
2	* 2.48372	58.29	Pk	32.5	-21.5	69.29	-	-	74	-4.71	117	217	H
3	* 2.48351	31.76	RMS	32.5	-21.5	42.76	54	-11.24	-	-	117	217	H
4	* 2.48419	34.91	RMS	32.5	-21.5	45.91	54	-8.09	-	-	117	217	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

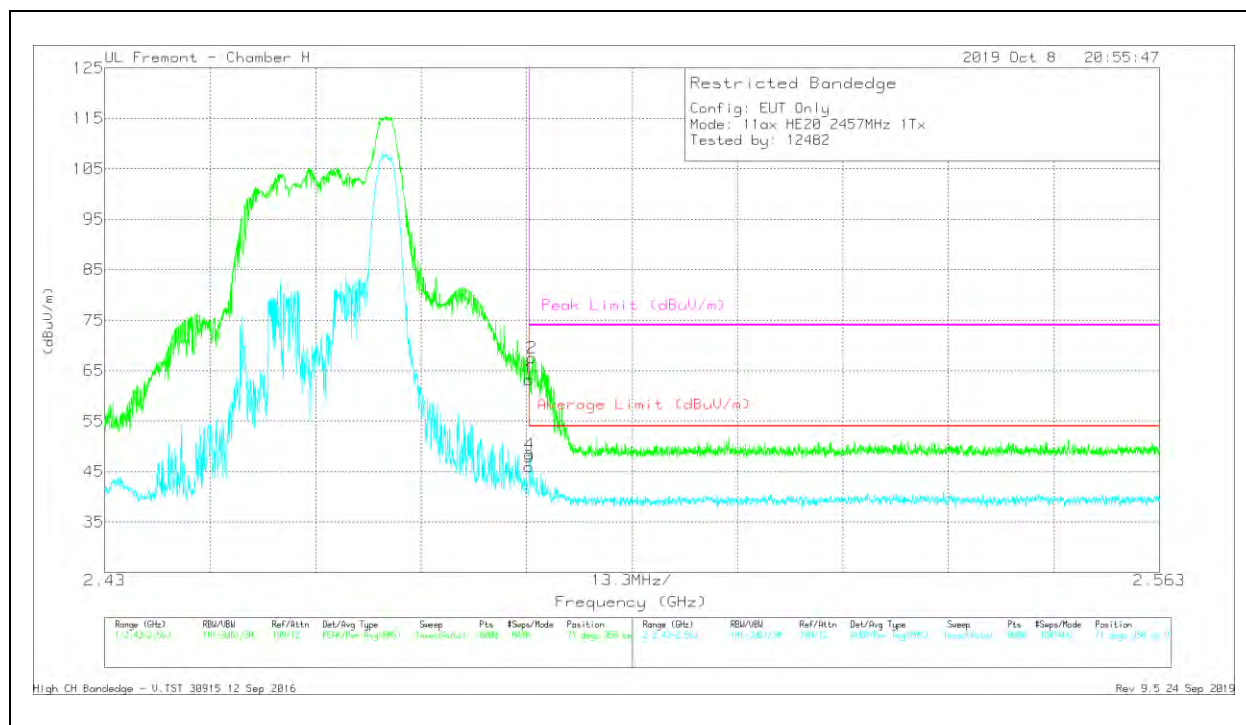


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	52.19	Pk	32.5	-21.5	63.19	-	-	74	-10.81	71	358	V
2	* 2.48387	56.51	Pk	32.5	-21.5	67.51	-	-	74	-6.49	71	358	V
3	* 2.48351	34.98	RMS	32.5	-21.5	45.98	54	-8.02	-	-	71	358	V
4	* 2.48359	37.41	RMS	32.5	-21.5	48.41	54	-5.59	-	-	71	358	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

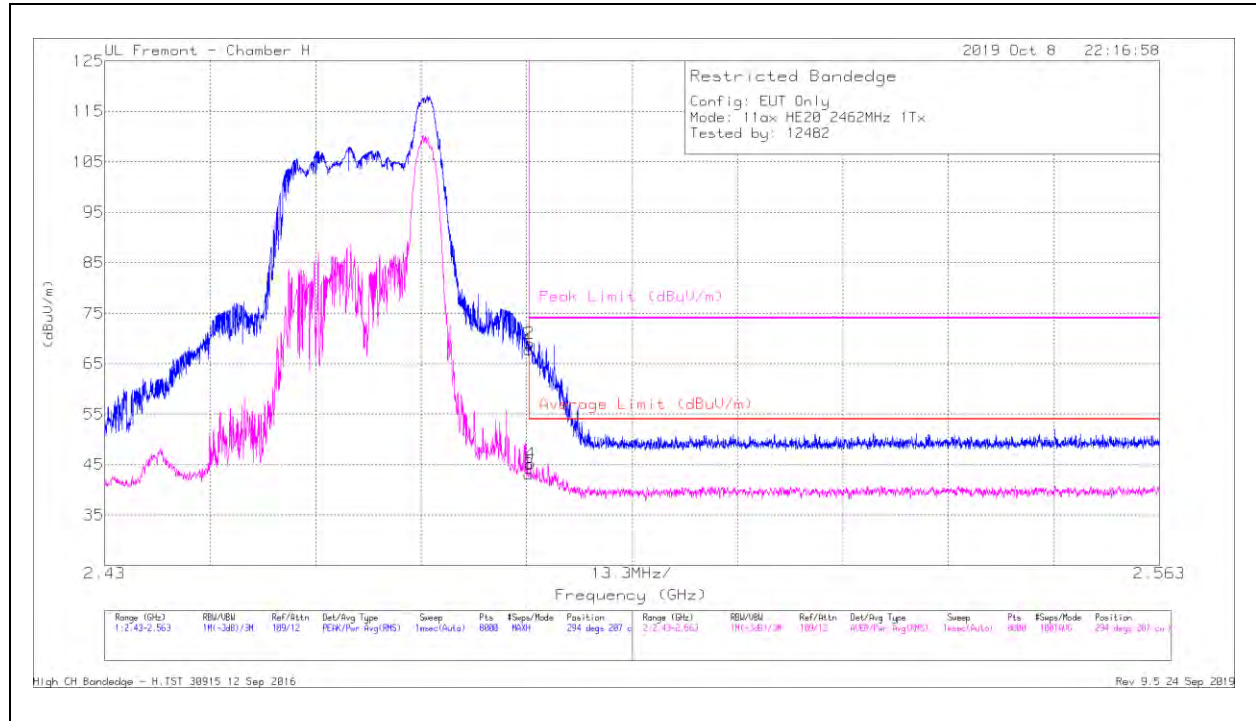

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.85	Pk	32.5	-21.5	67.85	-	-	74	-6.15	294	207	H
2	* 2.48361	58.09	Pk	32.5	-21.5	69.09	-	-	74	-4.91	294	207	H
3	* 2.48351	32.09	RMS	32.5	-21.5	43.09	54	-10.91	-	-	294	207	H
4	* 2.48372	34.15	RMS	32.5	-21.5	45.15	54	-8.85	-	-	294	207	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

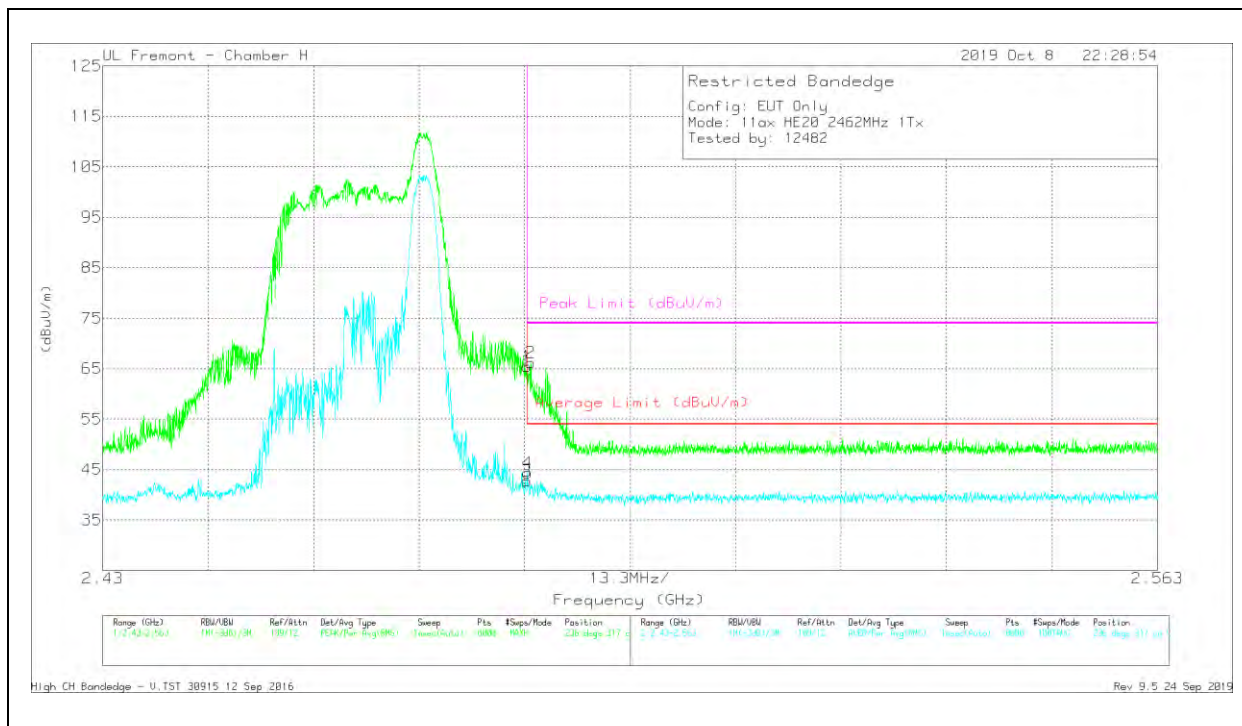


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Chl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	* 2.48351	54.46	Pk	32.5	-21.5	65.46	-	-	74	-8.54	236	317	V
2	* 2.484	55.23	Pk	32.5	-21.5	66.23	-	-	74	-7.77	236	317	V
3	* 2.48351	31.74	RMS	32.5	-21.5	42.74	54	-11.26	-	-	236	317	V
4	* 2.48356	33.33	RMS	32.5	-21.5	44.33	54	-9.67	-	-	236	317	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

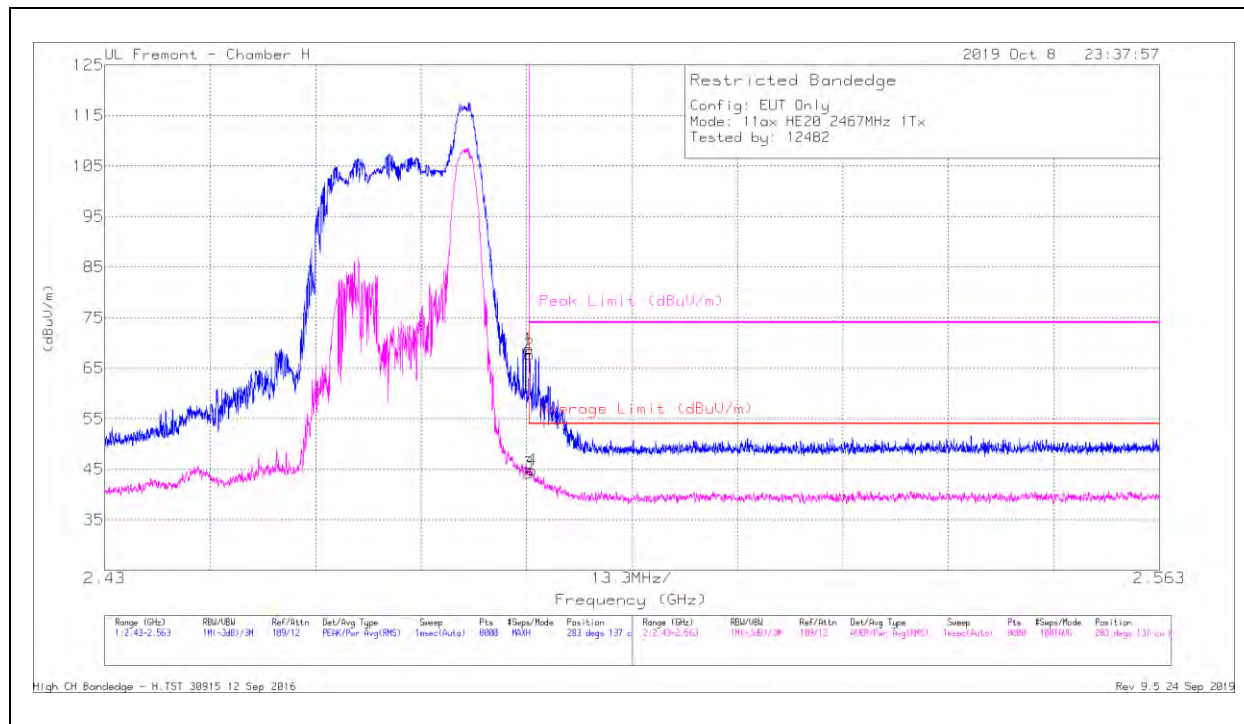


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	57.83	Pk	32.5	-21.5	68.83	-	-	74	-5.17	283	137	H
2	* 2.48359	56.68	Pk	32.5	-21.5	67.68	-	-	74	-6.32	283	137	H
3	* 2.48351	33.2	RMS	32.5	-21.5	44.2	54	-9.8	-	-	283	137	H
4	* 2.48387	33.88	RMS	32.5	-21.5	44.88	54	-9.12	-	-	283	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

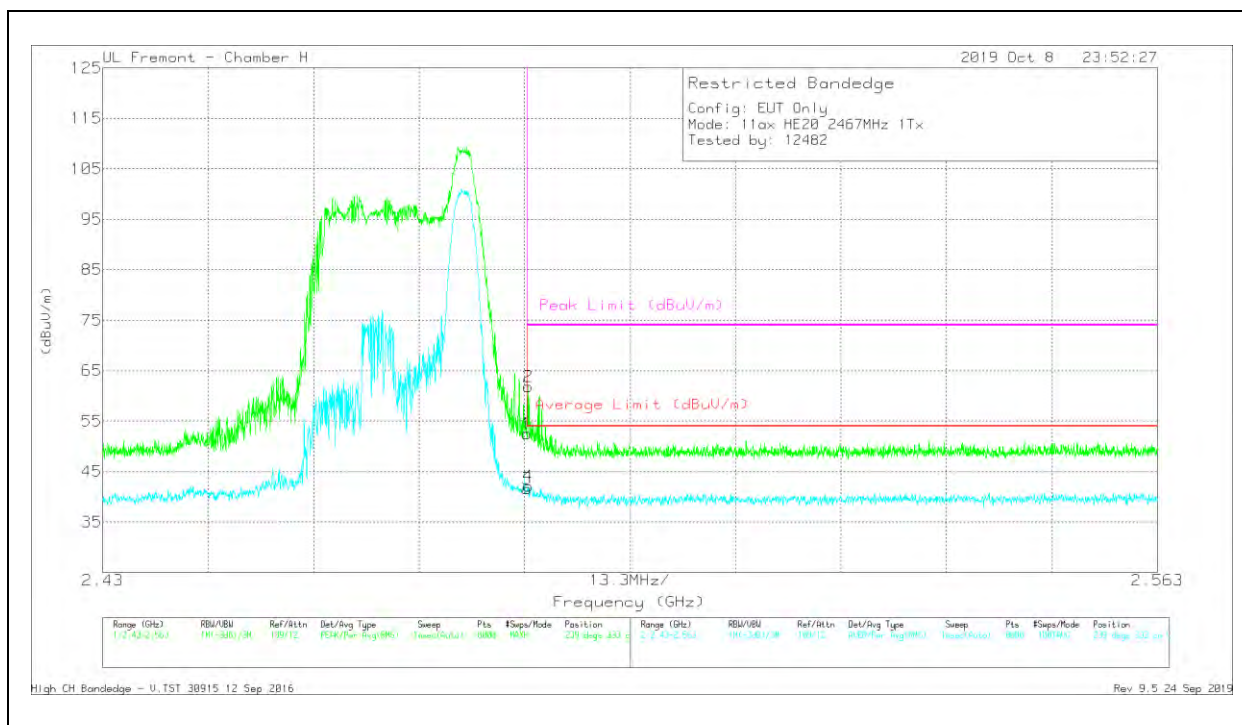


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T863 (dB/m)	Amp/CbW/Filt/Pa d (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.47	Pk	32.5	-21.5	52.47	-	-	74	-21.53	239	333	V
2	* 2.48364	50.86	Pk	32.5	-21.5	61.86	-	-	74	-12.14	239	333	V
3	* 2.48351	30.61	RMS	32.5	-21.5	41.61	54	-12.39	-	-	239	333	V
4	* 2.48369	31.11	RMS	32.5	-21.5	42.11	54	-11.89	-	-	239	333	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

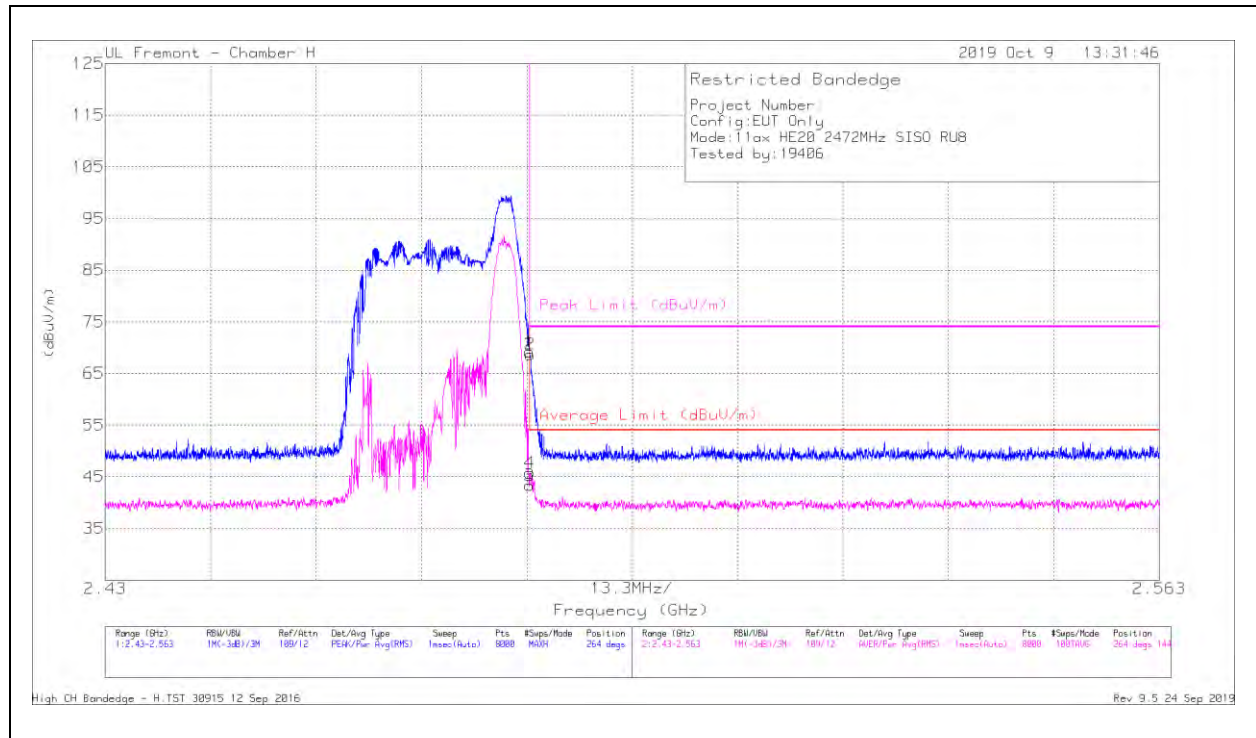


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	58.22	Pk	32.5	-21.5	69.22	-	-	74	-4.78	264	144	H
2	* 2.48359	57.7	Pk	32.5	-21.5	68.7	-	-	74	-5.3	264	144	H
3	* 2.48351	32.32	RMS	32.5	-21.5	43.32	54	-10.68	-	-	264	144	H
4	* 2.48357	34.74	RMS	32.5	-21.5	45.74	54	-8.26	-	-	264	144	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

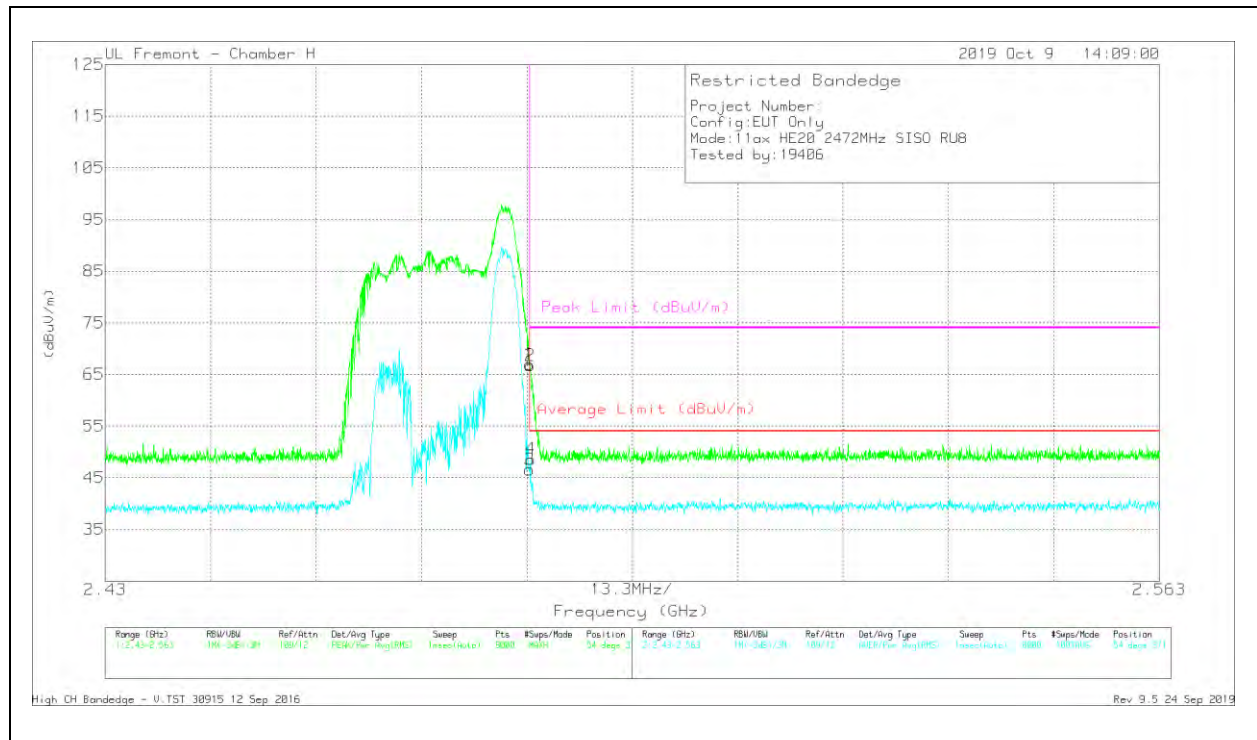

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	55.95	Pk	32.5	-21.5	66.95	-	-	74	-7.05	54	371	V
2	* 2.48362	55.71	Pk	32.5	-21.5	66.71	-	-	74	-7.29	54	371	V
3	* 2.48351	35.58	RMS	32.5	-21.5	46.58	54	-7.42	-	-	54	371	V
4	* 2.48367	37.61	RMS	32.5	-21.5	48.61	54	-5.39	-	-	54	371	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

UAT 1 LEGACY SISO MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

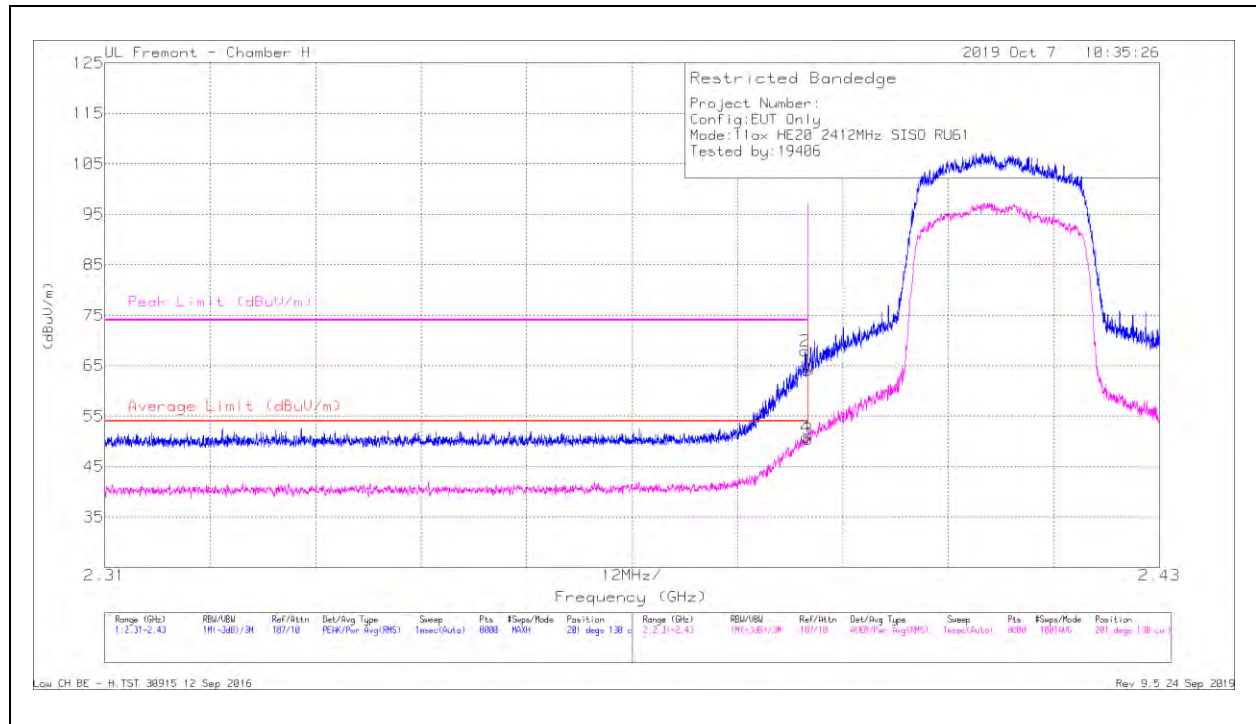

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/FiltriPad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	55.46	Pk	32.1	-23.5	64.06	-	-	74	-9.94	201	130	H
2	* 2.38968	59.31	Pk	32.1	-23.5	67.91	-	-	74	-6.09	201	130	H
3	* 2.38999	41.84	RMS	32.1	-23.5	50.44	54	-3.56	-	-	201	130	H
4	* 2.38968	42.16	RMS	32.1	-23.5	50.76	54	-3.24	-	-	201	130	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

UL Fremont - Chamber H

2019 Oct 7 10:43:37

Restricted Bandedge

Project Number:
Config:EUT Only
Mode:TIax HE20 2412MHz SISO RU61
Tested by:19406

Peak Limit (dBuV/m)

Average Limit (dBuV/m)

dBuV/m

Frequency (GHz)

12MHz/

Range (GHz)	RBW/VBW	Ref/AltIn	Det/Avg Type	Sweep	Pts	#Swept/Mode	Position	Range (GHz)	RBW/VBW	Ref/AltIn	Det/Avg Type	Sweep	Pts	#Swept/Mode	Position
1.2-2.43	100/300/30	100/10	PCW/Power Avg(ENR)	Normal/Full	60000	6000	100 steps 300	2.2-2.43	100/300/30	100/10	PCW/Power Avg(ENR)	Normal/Full	60000	6000	100 steps 300

Low CH BE - U.TST.38915 12 Sep 2016


Rev 9.5 24 Sep 2019

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	48.03	Pk	32.1	-23.5	56.63	-	-	74	-17.37	186	388	V
2	* 2.38975	49.47	Pk	32.1	-23.5	58.07	-	-	74	-15.93	186	388	V
3	* 2.38999	36.04	RMS	32.1	-23.5	44.64	54	-9.36	-	-	186	388	V
4	* 2.3899	36.12	RMS	32.1	-23.5	44.72	54	-9.28	-	-	186	388	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

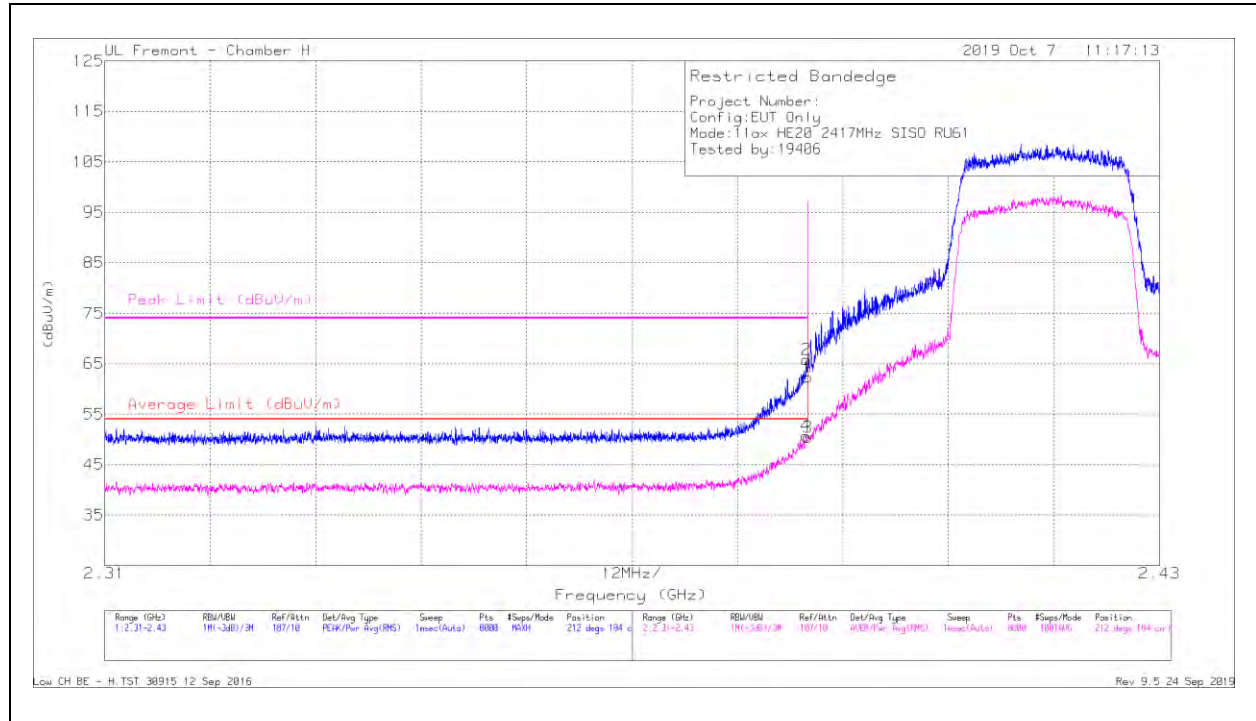


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	53.73	Pk	32.1	-23.5	62.33	-	-	74	-11.67	212	184	H
2	* 2.38984	57.24	Pk	32.1	-23.5	65.84	-	-	74	-8.16	212	184	H
3	* 2.38999	41.87	RMS	32.1	-23.5	50.47	54	-3.53	-	-	212	184	H
4	* 2.38975	42.08	RMS	32.1	-23.5	50.68	54	-3.32	-	-	212	184	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

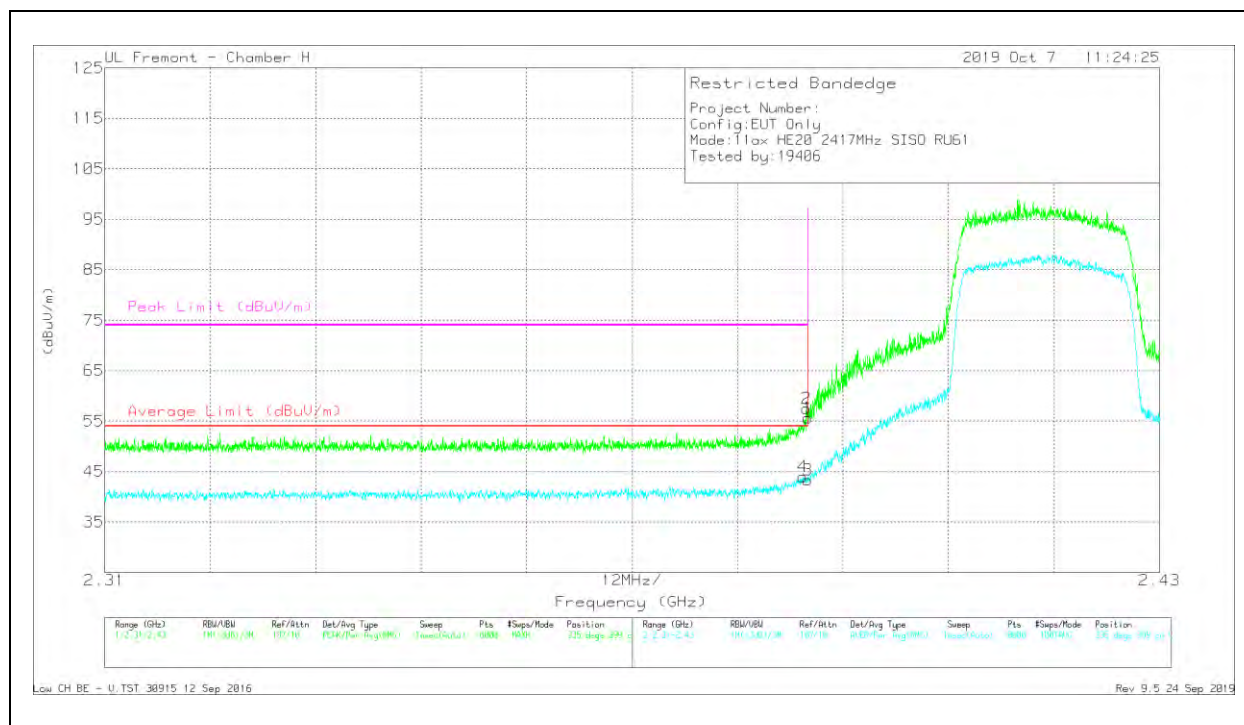

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	47.02	Pk	32.1	-23.5	55.62	-	-	74	-18.38	335	399	V
2	* 2.38983	48.9	Pk	32.1	-23.5	57.5	-	-	74	-16.5	335	399	V
3	* 2.38999	34.73	RMS	32.1	-23.5	43.33	54	-10.67	-	-	335	399	V
4	* 2.38944	35.33	RMS	32.1	-23.5	43.93	54	-10.07	-	-	335	399	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

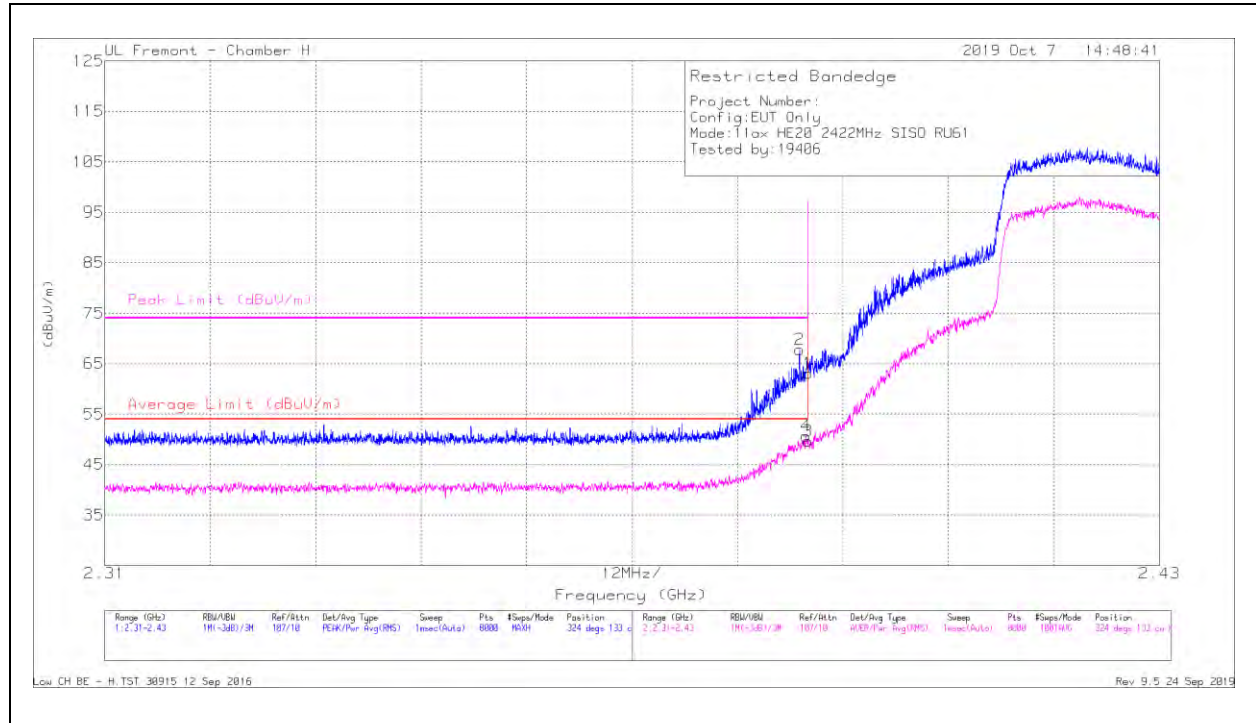


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	54.51	Pk	32.1	-23.5	63.11	-	-	74	-10.89	324	133	H
2	* 2.38906	59.15	Pk	32.1	-23.5	67.75	-	-	74	-6.25	324	133	H
3	* 2.38999	41.07	RMS	32.1	-23.5	49.67	54	-4.33	-	-	324	133	H
4	* 2.38978	42.04	RMS	32.1	-23.5	50.64	54	-3.36	-	-	324	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

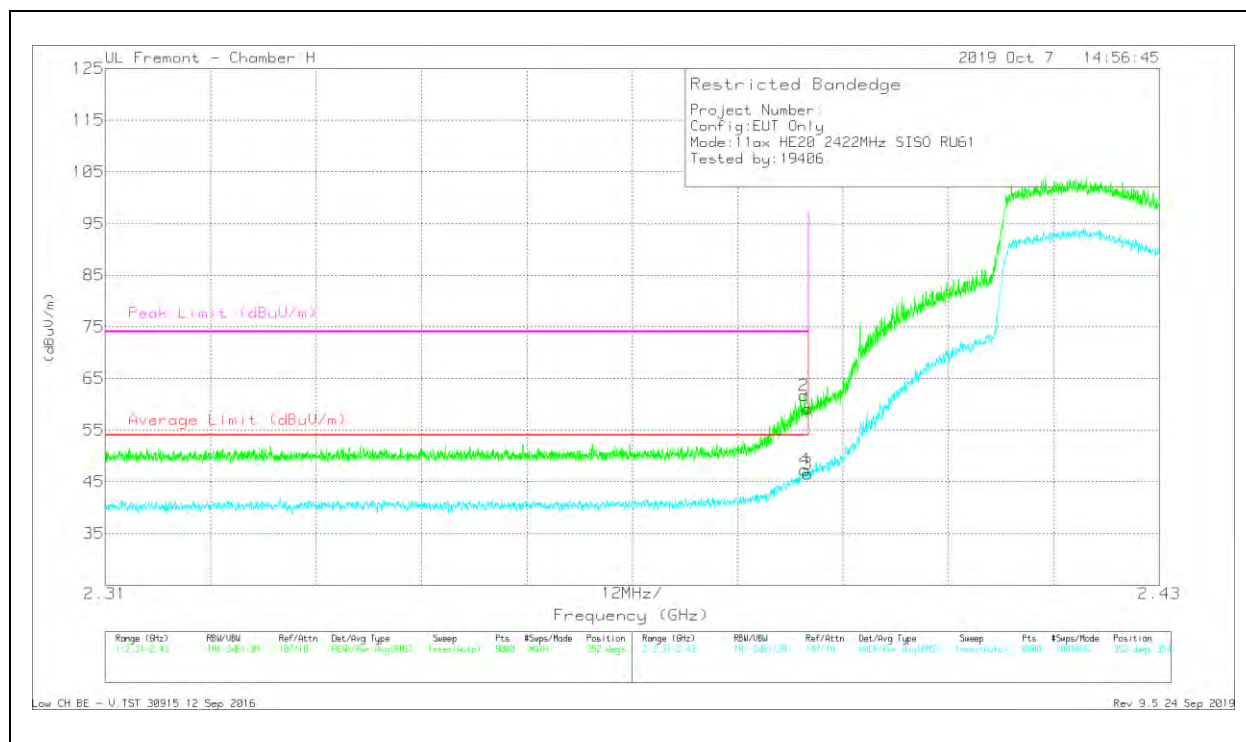

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	50.53	Pk	32.1	-23.5	59.13	-	-	74	-14.87	352	354	V
2	* 2.38956	53.11	Pk	32.1	-23.5	61.71	-	-	74	-12.29	352	354	V
3	* 2.38999	37.94	RMS	32.1	-23.5	46.54	54	-7.46	-	-	352	354	V
4	* 2.38965	38.7	RMS	32.1	-23.5	47.3	54	-6.7	-	-	352	354	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

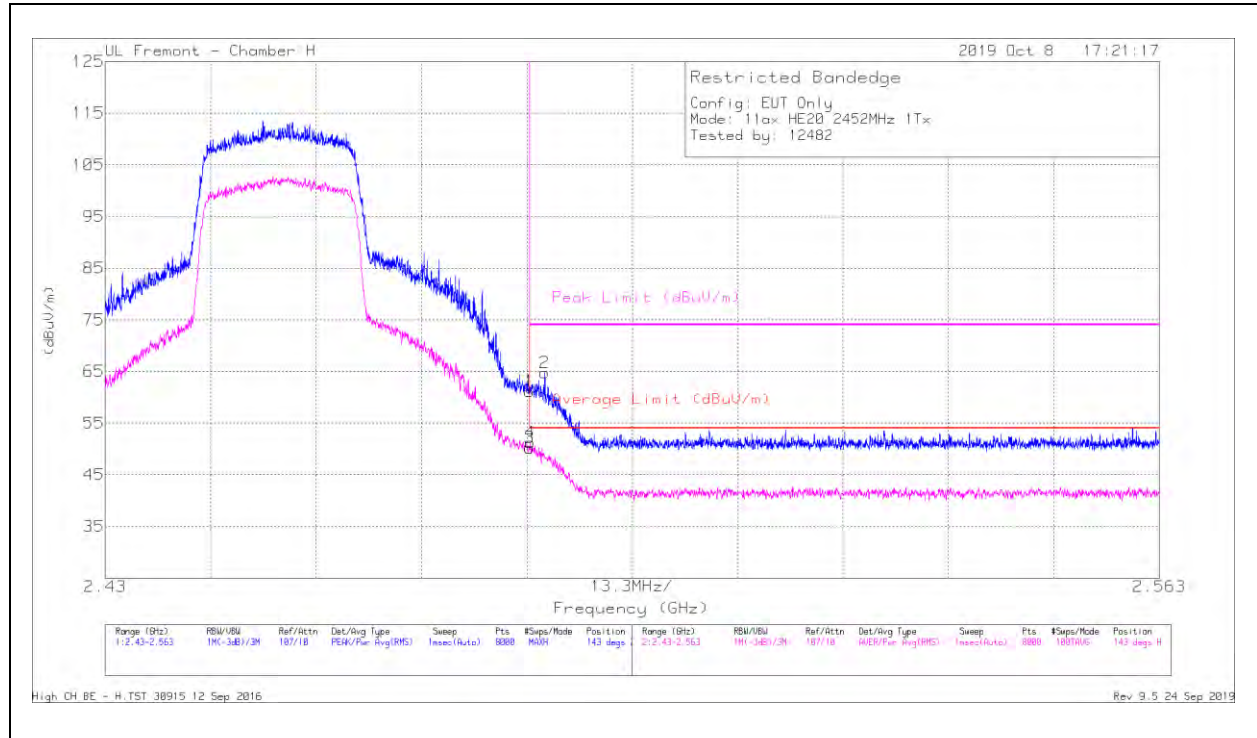

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	51.95	Pk	32.5	-23.3	61.15	-	-	74	-12.85	143	202	H
2	* 2.48545	55.54	Pk	32.5	-23.3	64.74	-	-	74	-9.26	143	202	H
3	* 2.48351	41.04	RMS	32.5	-23.3	50.24	54	-3.76	-	-	143	202	H
4	* 2.48359	42.05	RMS	32.5	-23.3	51.25	54	-2.75	-	-	143	202	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UL Fremont - Chamber H

2019 Oct 8 17:29:36

Restricted Bandedge
Config: EUT Only
Mode: 11a: HE20 2452MHz 1Tx
Tested by: 12482

Peak Limit (dBuV/m)

Average Limit (dBuV/m)

1.33MHz/

Frequency (GHz)

Range (Hz)	RBW/VBW	Ref/Attn	Det/Avg Type	Sweep	Pts	#Sups/Mode	Position	Range (Hz)	RBW/VBW	Ref/Attn	Det/Avg Type	Sweep	Pts	#Sups/Mode	Position
1.2, 43-2.563	100-345/30	107/10	PEAK/Freq Avg (dB)	Inter/Auto	9000	100/1	83 deg 11	2.12, 43-2.563	100-345/30	107/10	PEAK/Freq Avg (dB)	Inter/Auto	9000	100/1	83 deg 11

High CH BE - U.TST 38915 12 Sep 2016


Rev 9.5 24 Sep 2019

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	50.41	Pk	32.5	-23.3	59.61	-	-	74	-14.39	83	363	V
2	* 2.4851	51.08	Pk	32.5	-23.3	60.28	-	-	74	-13.72	83	363	V
3	* 2.48351	38.48	RMS	32.5	-23.3	47.68	54	-6.32	-	-	83	363	V
4	* 2.48366	39.44	RMS	32.5	-23.3	48.64	54	-5.36	-	-	83	363	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

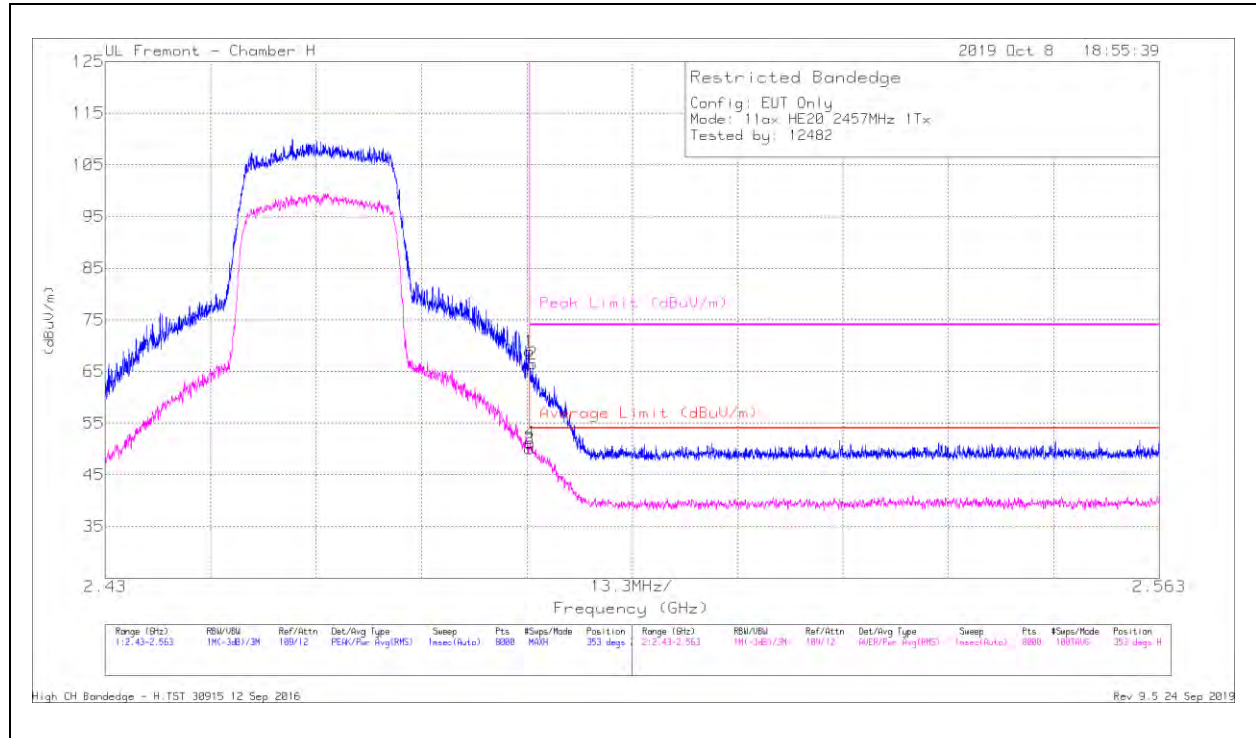


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	57.89	Pk	32.5	-21.5	68.89	-	-	74	-5.11	353	277	H
2	* 2.4839	55.48	Pk	32.5	-21.5	66.48	-	-	74	-7.52	353	277	H
3	* 2.48351	39.02	RMS	32.5	-21.5	50.02	54	-3.98	-	-	353	277	H
4	* 2.48359	40.2	RMS	32.5	-21.5	51.2	54	-2.8	-	-	353	277	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

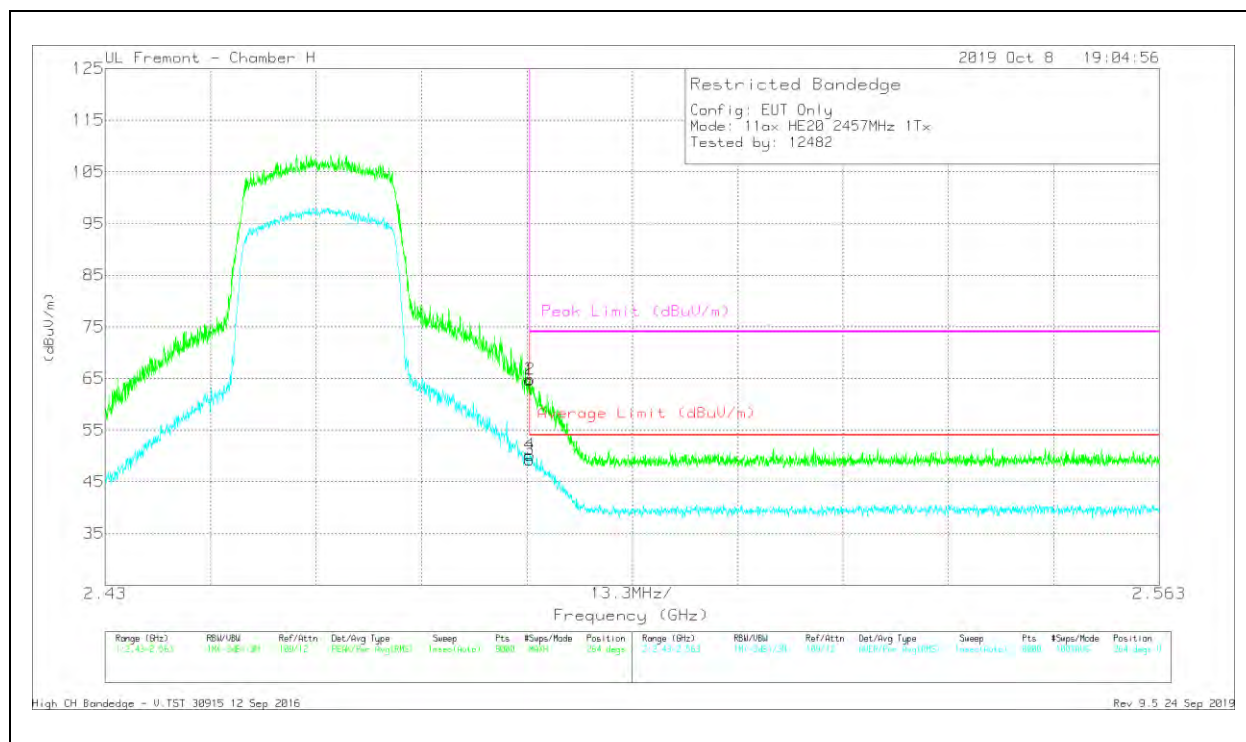

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.63	Pk	32.5	-21.5	64.63	-	-	74	-9.37	264	318	V
2	* 2.48362	53.85	Pk	32.5	-21.5	64.85	-	-	74	-9.15	264	318	V
3	* 2.48351	38.27	RMS	32.5	-21.5	49.27	54	-4.73	-	-	264	318	V
4	* 2.48357	39.21	RMS	32.5	-21.5	50.21	54	-3.79	-	-	264	318	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

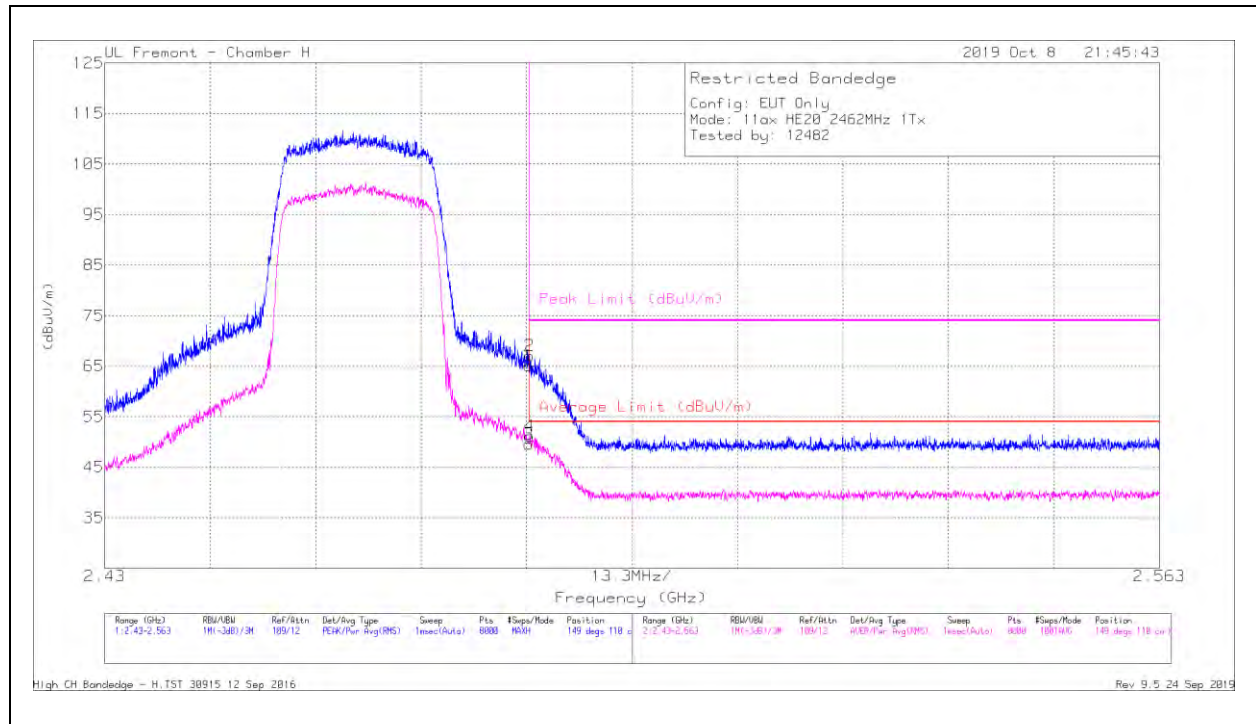


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	54.07	Pk	32.5	-21.5	65.07	-	-	74	-8.93	149	110	H
2	* 2.48354	56	Pk	32.5	-21.5	67	-	-	74	-7	149	110	H
3	* 2.48351	38.54	RMS	32.5	-21.5	49.54	54	-4.46	-	-	149	110	H
4	* 2.48361	40.17	RMS	32.5	-21.5	51.17	54	-2.83	-	-	149	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

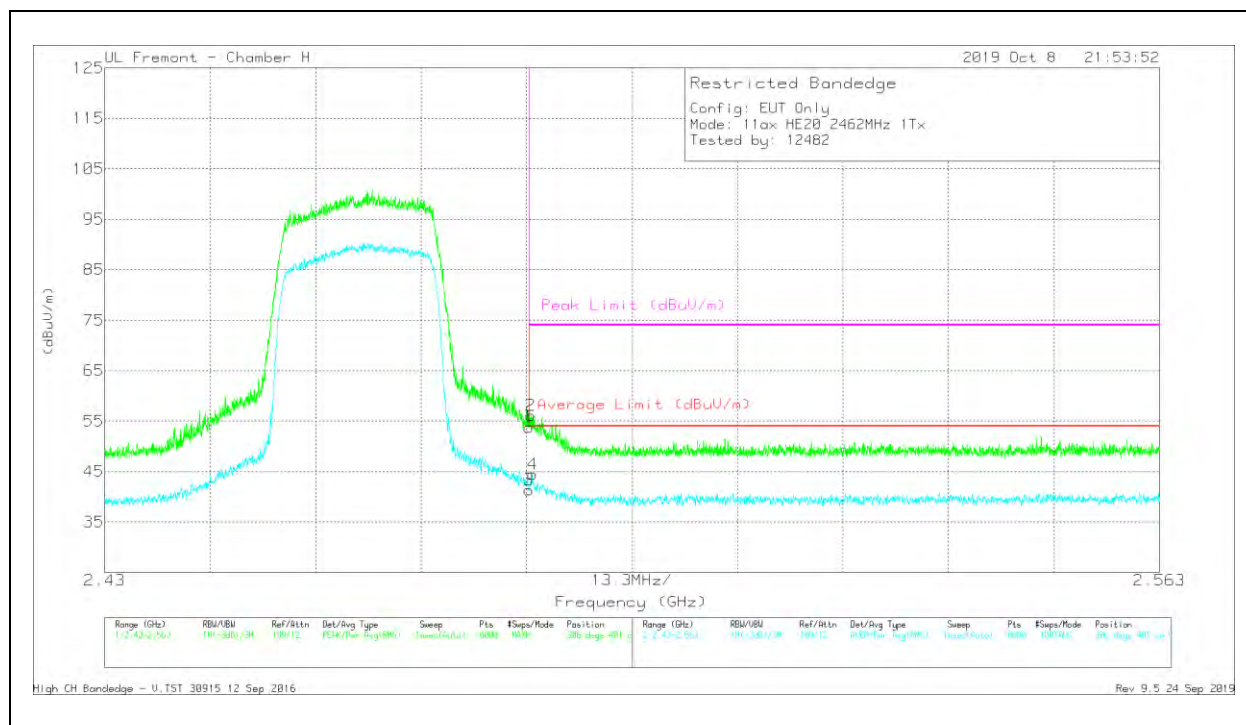

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.83	Pk	32.5	-21.5	53.83	-	-	74	-20.17	306	401	V
2	* 2.48372	45.13	Pk	32.5	-21.5	56.13	-	-	74	-17.87	306	401	V
3	* 2.48351	30.41	RMS	32.5	-21.5	41.41	54	-12.59	-	-	306	401	V
4	* 2.48395	33.46	RMS	32.5	-21.5	44.46	54	-9.54	-	-	306	401	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

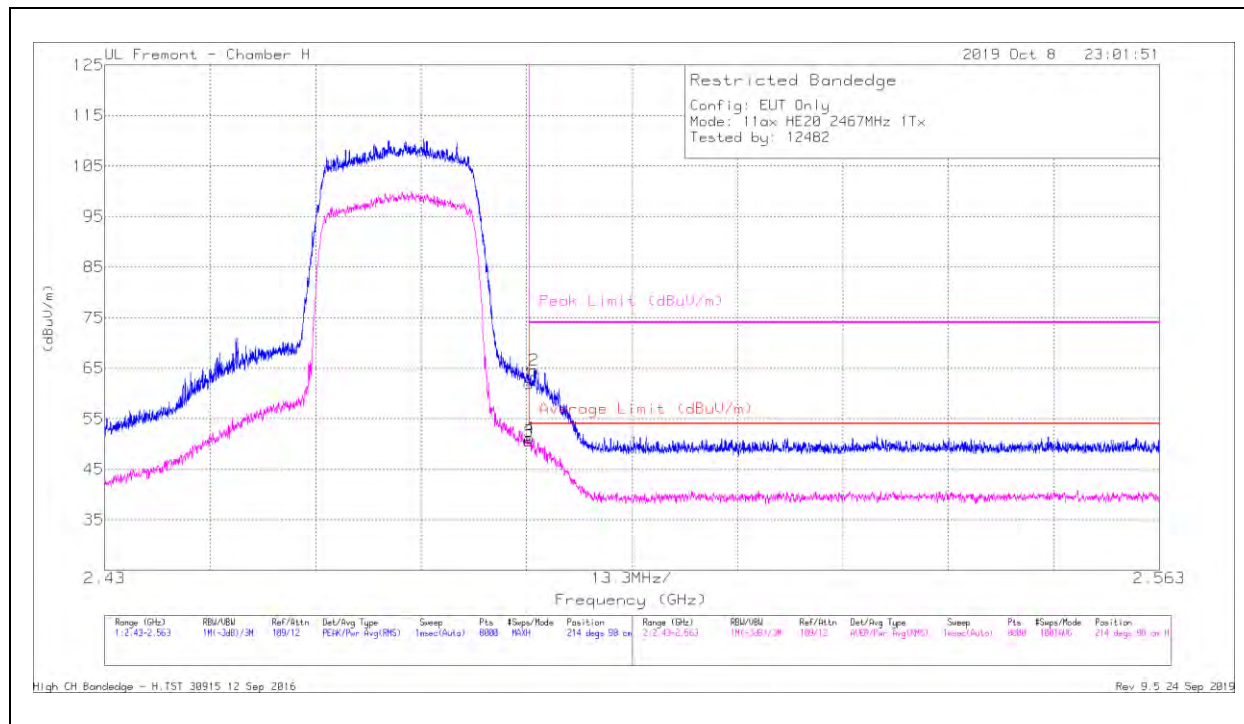


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	50.98	Pk	32.5	-21.5	61.98	-	-	74	-12.02	214	98	H
2	* 2.48415	53.61	Pk	32.5	-21.5	64.61	-	-	74	-9.39	214	98	H
3	* 2.48351	39.58	RMS	32.5	-21.5	50.58	54	-3.42	-	-	214	98	H
4	* 2.48354	40.17	RMS	32.5	-21.5	51.17	54	-2.83	-	-	214	98	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

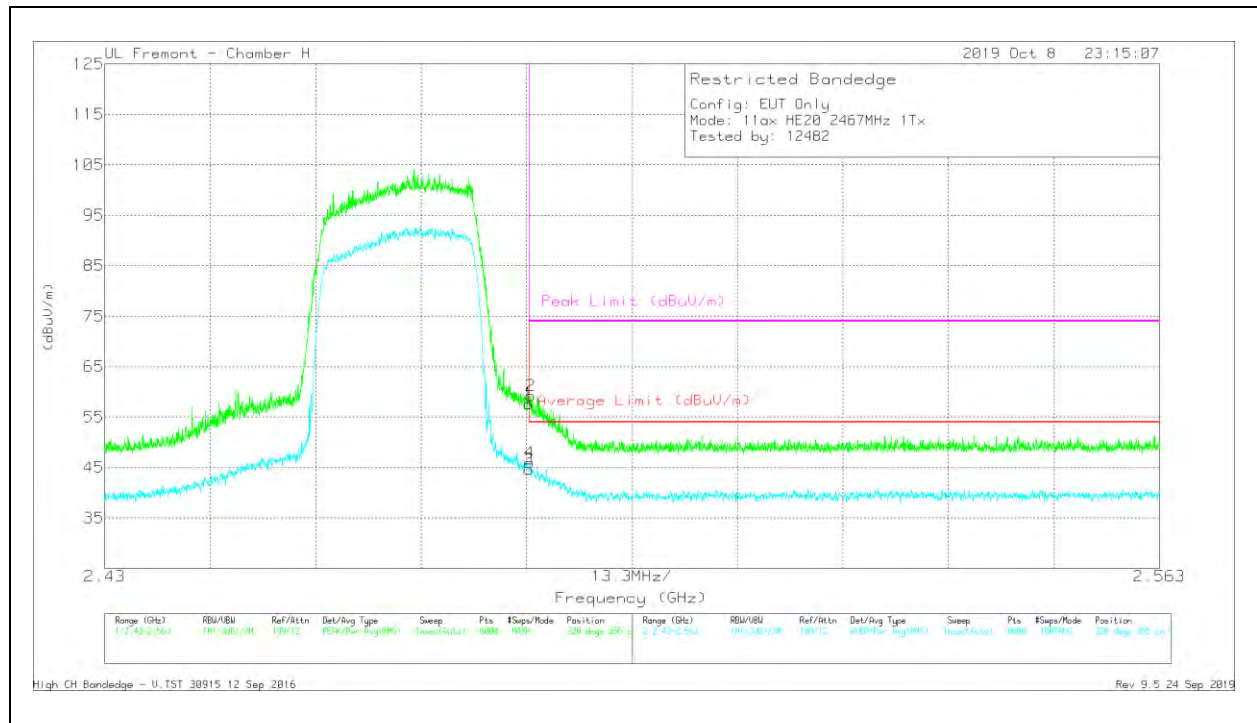

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	46.56	Pk	32.5	-21.5	57.56	-	-	74	-16.44	328	355	V
2	* 2.48371	48.18	Pk	32.5	-21.5	59.18	-	-	74	-14.82	328	355	V
3	* 2.48351	33.74	RMS	32.5	-21.5	44.74	54	-9.26	-	-	328	355	V
4	* 2.48359	34.95	RMS	32.5	-21.5	45.95	54	-8.05	-	-	328	355	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

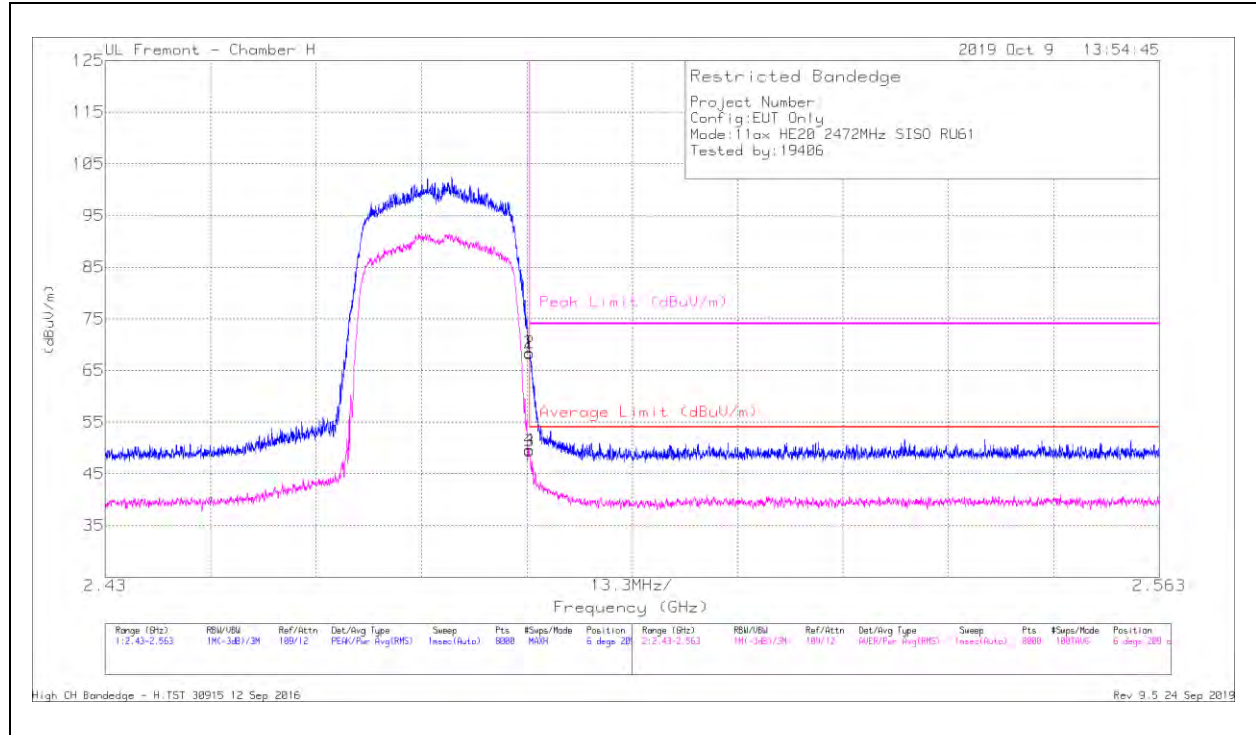


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	57.33	Pk	32.5	-21.5	68.33	-	-	74	-5.67	6	209	H
2	* 2.48352	57.42	Pk	32.5	-21.5	68.42	-	-	74	-5.58	6	209	H
3	* 2.48351	38.42	RMS	32.5	-21.5	49.42	54	-4.58	-	-	6	209	H
4	* 2.48352	38.66	RMS	32.5	-21.5	49.66	54	-4.34	-	-	6	209	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

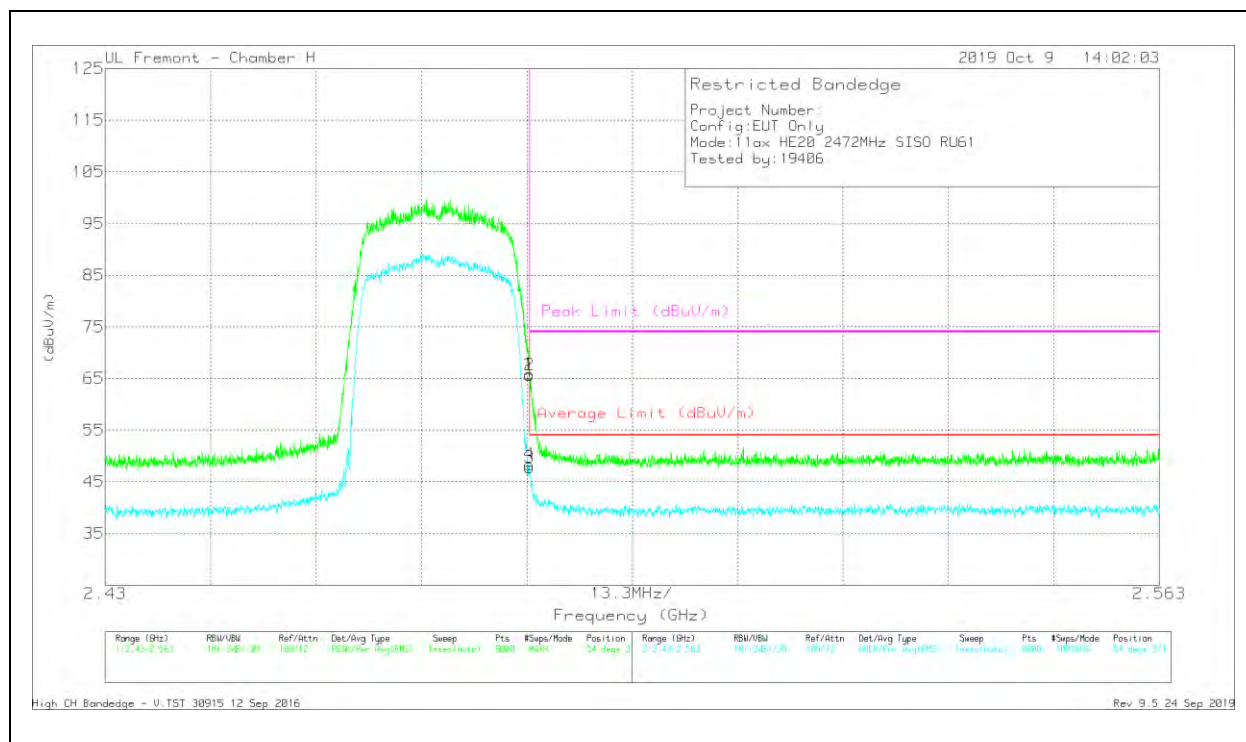

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	54.84	Pk	32.5	-21.5	65.84	-	-	74	-8.16	54	371	V
2	* 2.48354	54.66	Pk	32.5	-21.5	65.66	-	-	74	-8.34	54	371	V
3	* 2.48351	36.81	RMS	32.5	-21.5	47.81	54	-6.19	-	-	54	371	V
4	* 2.48352	37.38	RMS	32.5	-21.5	48.38	54	-5.62	-	-	54	371	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

LAT 3 LEGACY SISO MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

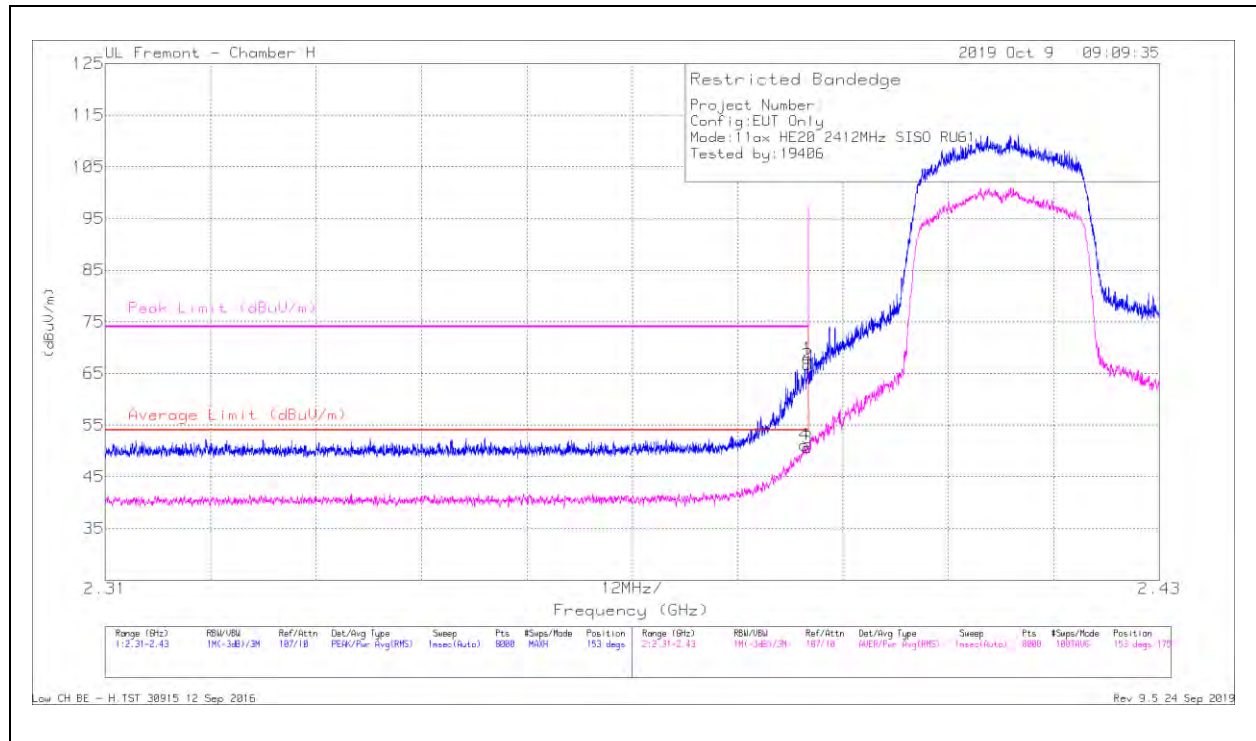

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	59.29	Pk	32.1	-23.5	67.89	-	-	74	-6.11	153	175	H
2	* 2.38998	58.08	Pk	32.1	-23.5	66.68	-	-	74	-7.32	153	175	H
3	* 2.38999	42.02	RMS	32.1	-23.5	50.62	54	-3.38	-	-	153	175	H
4	* 2.38963	42.58	RMS	32.1	-23.5	51.18	54	-2.82	-	-	153	175	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

UL Fremont - Chamber H

2019 Oct 9 09:18:55

Restricted Bandedge

Project Number:

Config:EUT Only

Mode:11ax HE20 2412MHz SISO RU61

Tested by:19406

Peak Limit (dBuV/m)

Average Limit (dBuV/m)

12MHz/

Frequency (GHz)

Range (Hz)	RBW/VBW	Ref/Attn	Det/Avg Type	Sweep	Pts	#Swepts/Mode	Position
2.31-2.43	100-345/20	10/7.0	PKA/RM Avg(PPS)	Intersect	9000	100/1000	1.70 degs

Low CH BE - U-TST_30915 12 Sep 2016


Rev 9.5 24 Sep 2019

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	49.44	Pk	32.1	-23.5	58.04	-	-	74	-15.96	179	328	V
2	* 2.38932	52.02	Pk	32.1	-23.5	60.62	-	-	74	-13.38	179	328	V
3	* 2.38999	37.53	RMS	32.1	-23.5	46.13	54	-7.87	-	-	179	328	V
4	* 2.38984	38.12	RMS	32.1	-23.5	46.72	54	-7.28	-	-	179	328	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

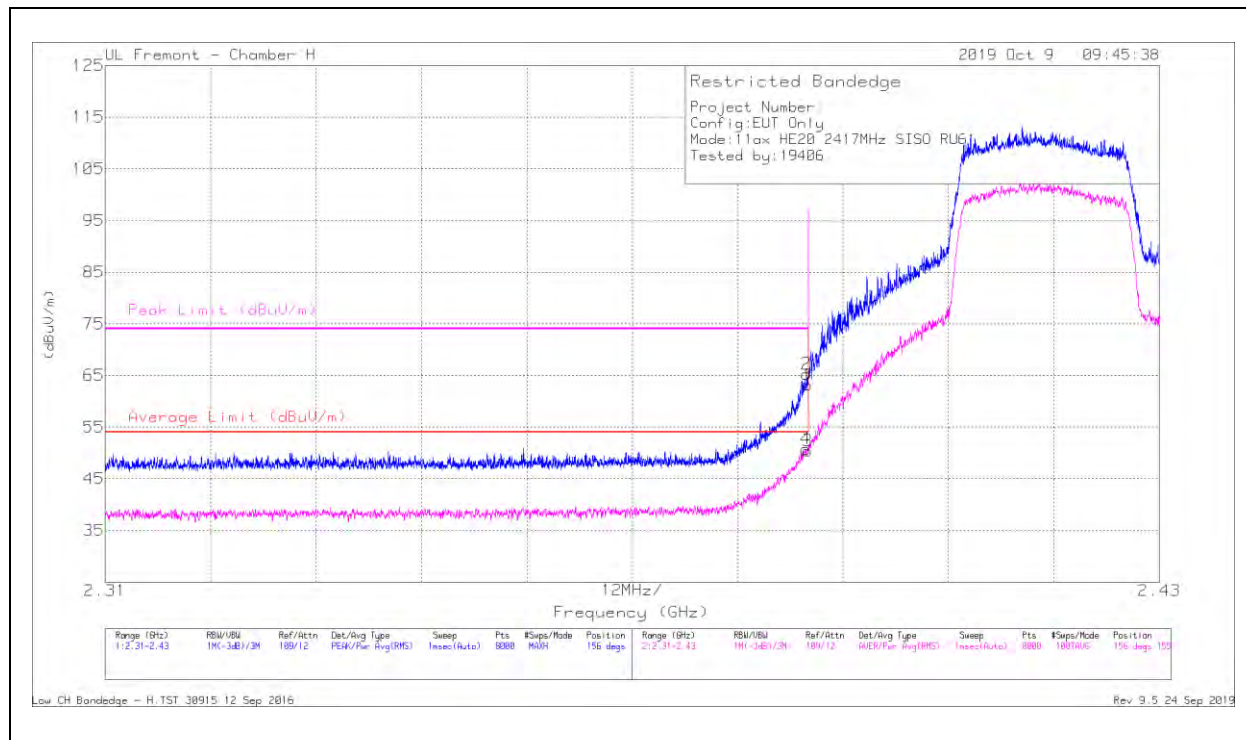

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	52.46	Pk	32.1	-21.4	63.16	-	-	74	-10.84	156	155	H
2	* 2.38983	54.57	Pk	32.1	-21.4	65.27	-	-	74	-8.73	156	155	H
3	* 2.38999	39.7	RMS	32.1	-21.4	50.4	54	-3.6	-	-	156	155	H
4	* 2.38975	40.01	RMS	32.1	-21.4	50.71	54	-3.29	-	-	156	155	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

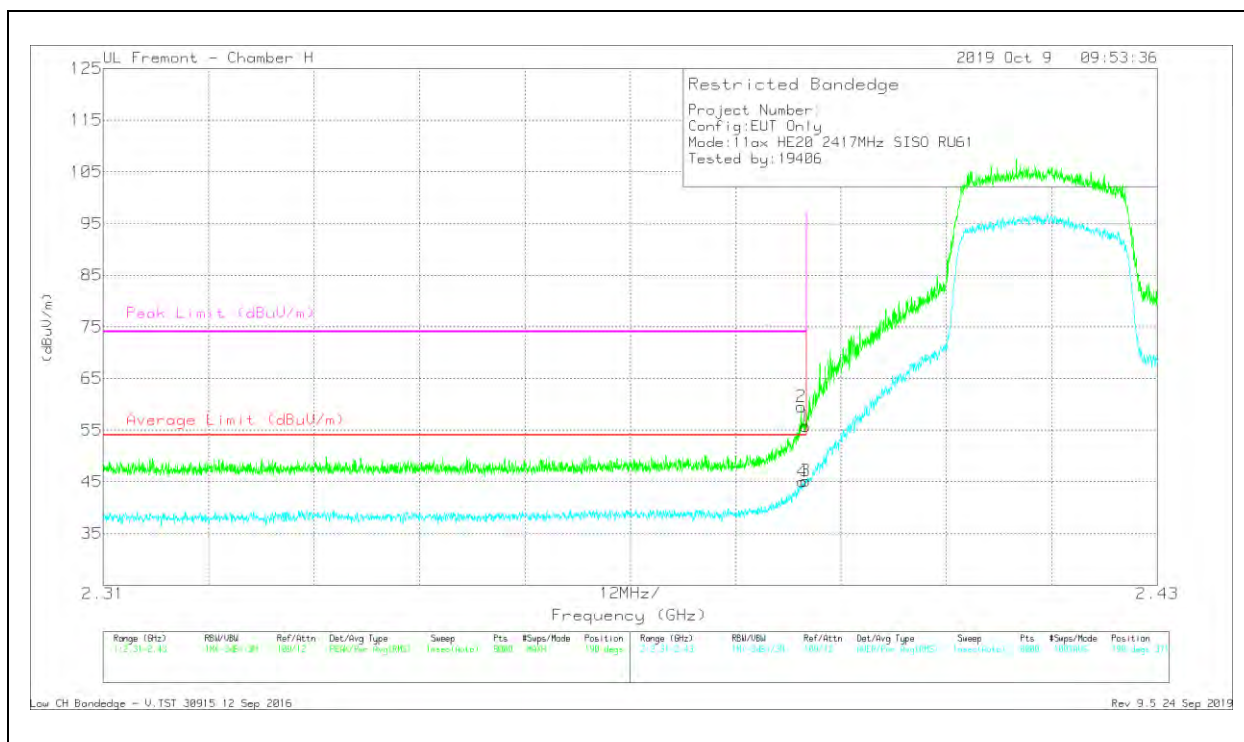

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT863 (dB/m)	Amp/Cbl/FitriPad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	45.1	Pk	32.1	-21.4	55.8	-	-	74	-18.2	190	371	V
2	* 2.38945	48.85	Pk	32.1	-21.4	59.55	-	-	74	-14.45	190	371	V
3	* 2.38999	34.49	RMS	32.1	-21.4	45.19	54	-8.81	-	-	190	371	V
4	* 2.38962	34.32	RMS	32.1	-21.4	45.02	54	-8.98	-	-	190	371	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

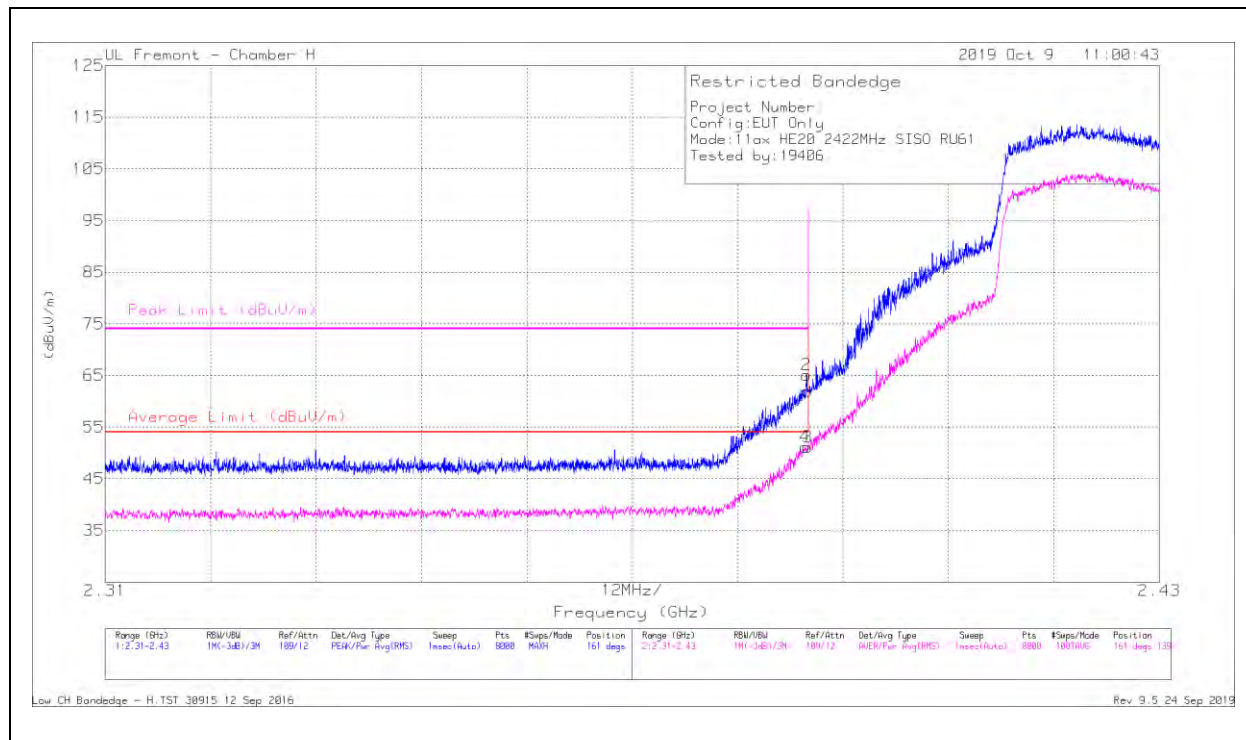

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	51.27	Pk	32.1	-21.4	61.97	-	-	74	-12.03	161	139	H
2	* 2.38984	54.38	Pk	32.1	-21.4	65.08	-	-	74	-8.92	161	139	H
3	* 2.38999	40.42	RMS	32.1	-21.4	51.12	54	-2.88	-	-	161	139	H
4	* 2.38966	40.43	RMS	32.1	-21.4	51.13	54	-2.87	-	-	161	139	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

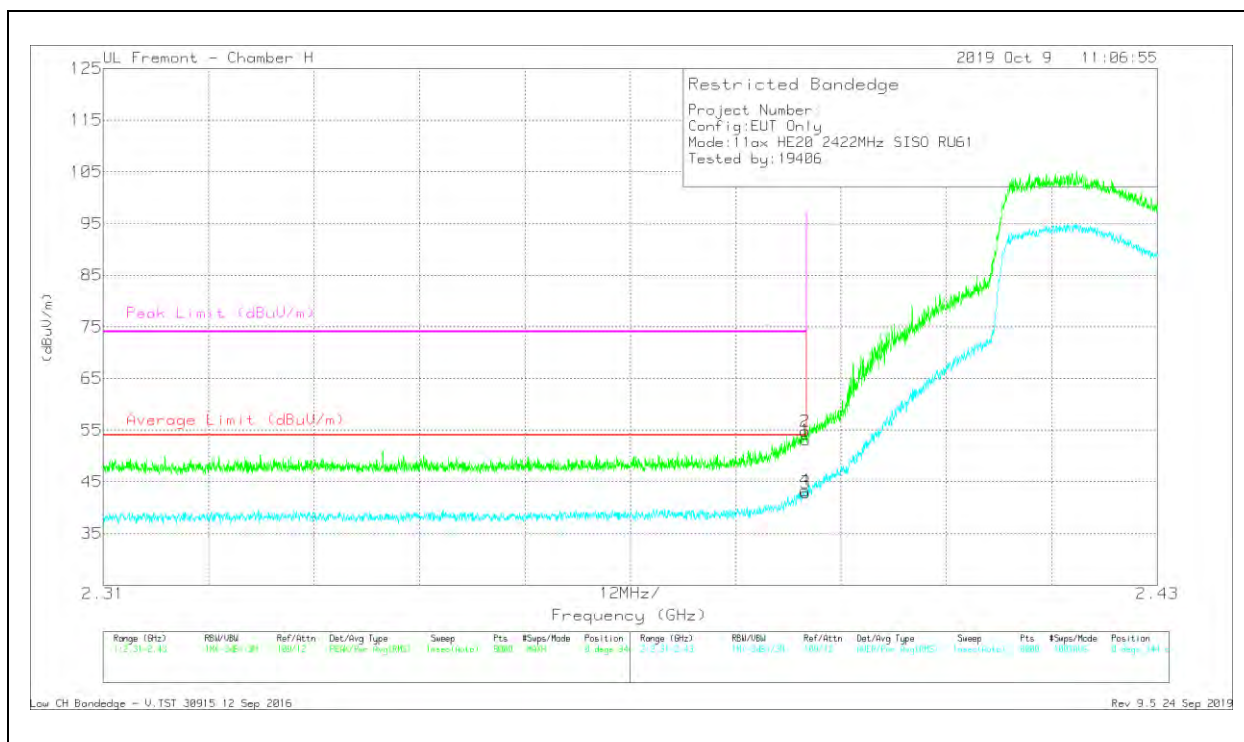

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	* 2.38999	42.37	Pk	32.1	-21.4	53.07	-	-	74	-20.93	0	344	V
2	* 2.38992	44.05	Pk	32.1	-21.4	54.75	-	-	74	-19.25	0	344	V
3	* 2.38999	32.19	RMS	32.1	-21.4	42.89	54	-11.11	-	-	0	344	V
4	* 2.3899	32.6	RMS	32.1	-21.4	43.3	54	-10.7	-	-	0	344	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

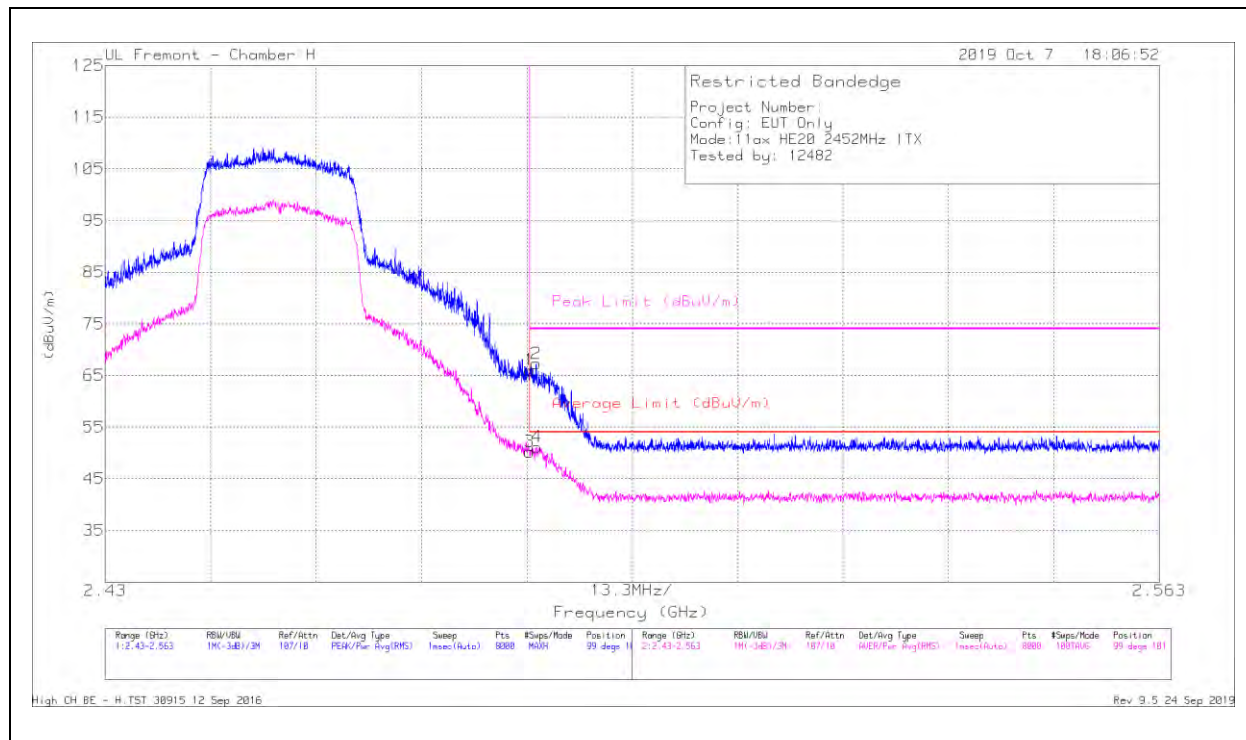

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.83	Pk	32.5	-23.3	66.03	-	-	74	-7.97	99	101	H
2	* 2.48437	58.1	Pk	32.5	-23.3	67.3	-	-	74	-6.7	99	101	H
3	* 2.48351	41.03	RMS	32.5	-23.3	50.23	54	-3.77	-	-	99	101	H
4	* 2.48449	41.95	RMS	32.5	-23.3	51.15	54	-2.85	-	-	99	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

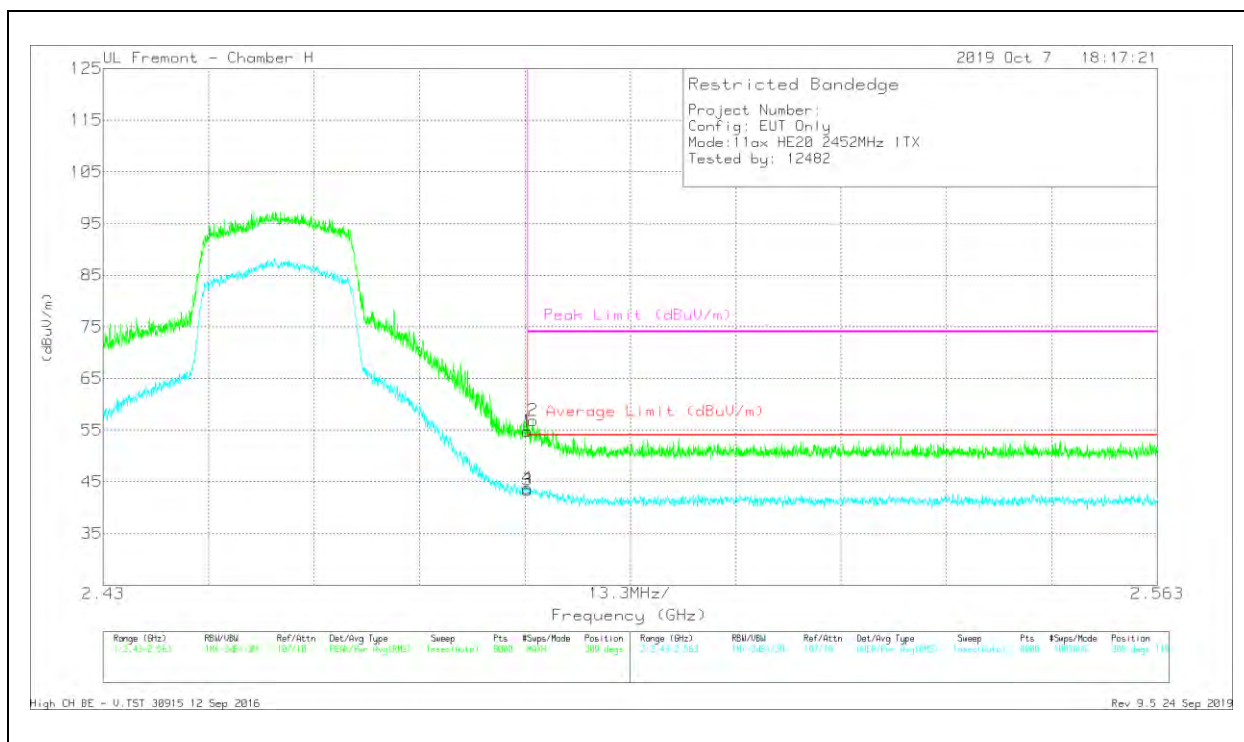

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	45.58	Pk	32.5	-23.3	54.78	-	-	74	-19.22	309	119	V
2	* 2.48424	47.69	Pk	32.5	-23.3	56.89	-	-	74	-17.11	309	119	V
3	* 2.48351	34.21	RMS	32.5	-23.3	43.41	54	-10.59	-	-	309	119	V
4	* 2.48356	34.58	RMS	32.5	-23.3	43.78	54	-10.22	-	-	309	119	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

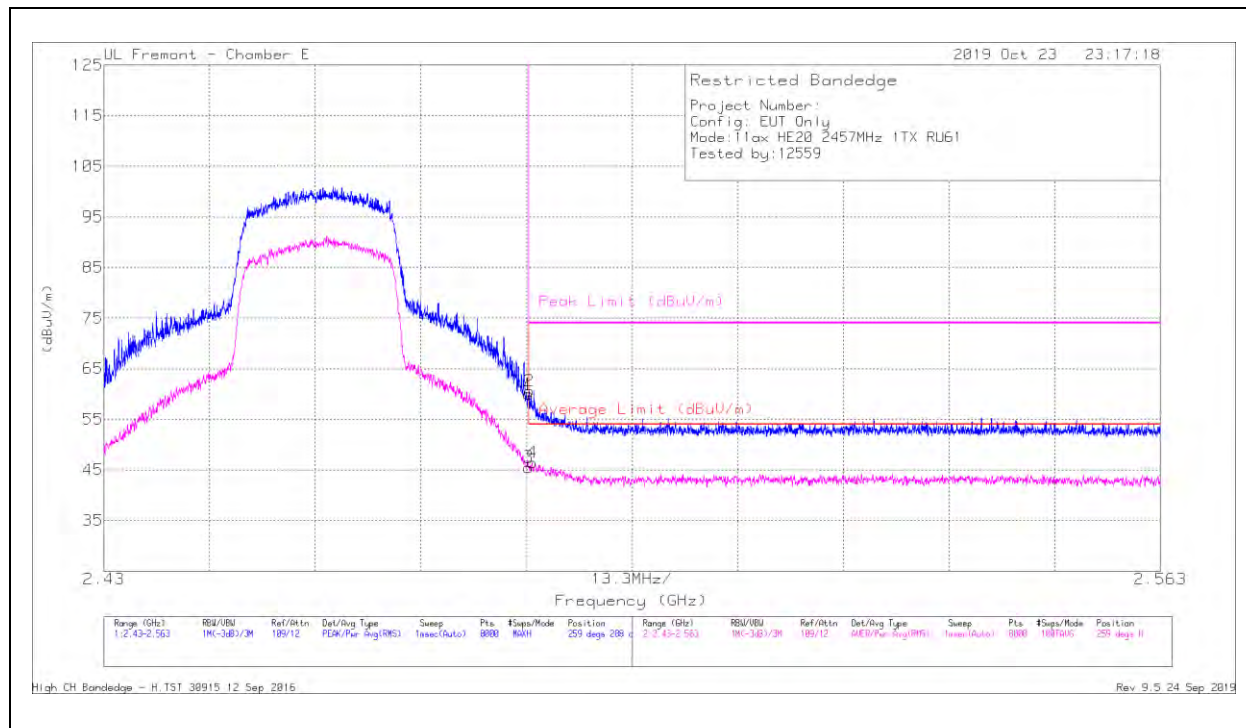


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	45.23	Pk	32.8	-18	60.03	-	-	74	-13.97	259	288	H
2	* 2.48352	45.85	Pk	32.8	-18	60.65	-	-	74	-13.35	259	288	H
3	* 2.48351	30.71	RMS	32.8	-18	45.51	54	-8.49	-	-	259	288	H
4	* 2.48392	31.63	RMS	32.8	-18	46.43	54	-7.57	-	-	259	288	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

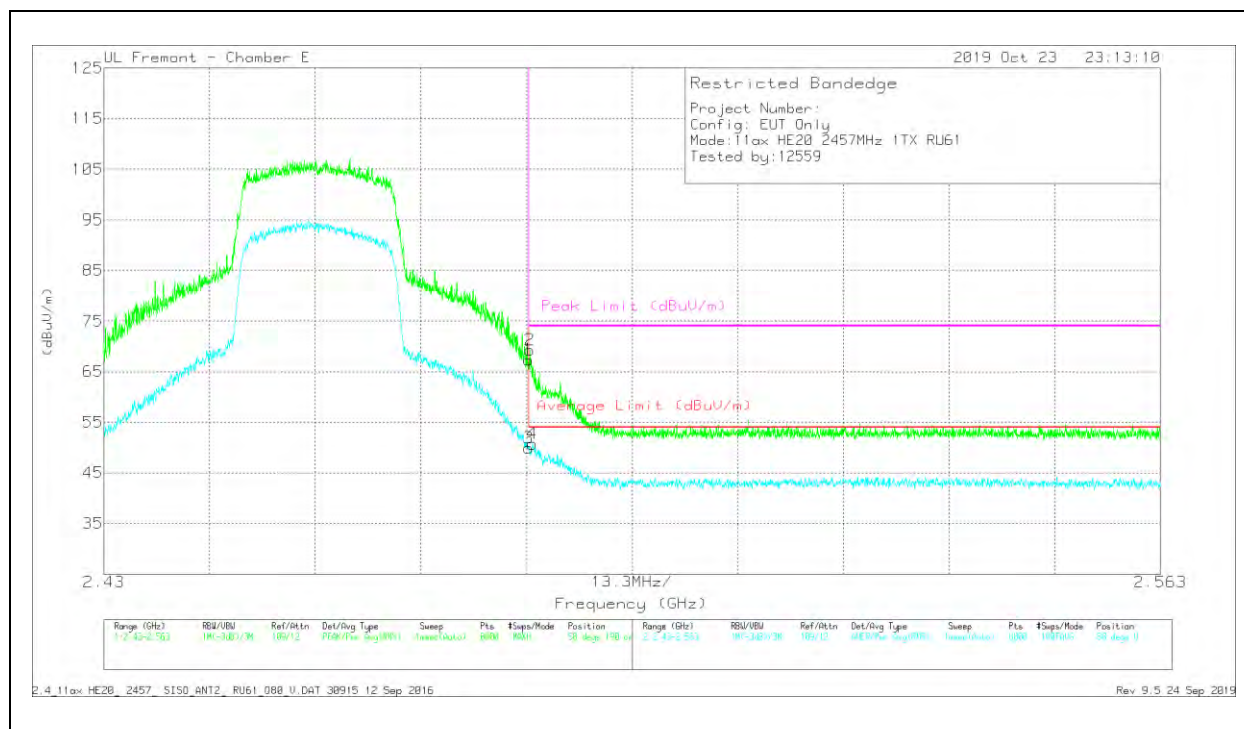

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	52.56	Pk	32.8	-18	67.36	-	-	74	-6.64	58	190	V
2	* 2.48362	54.5	PK	32.8	-18	69.3	-	-	74	-4.7	58	190	V
3	* 2.48351	35.07	RMS	32.8	-18	49.87	54	-4.13	-	-	58	190	V
4	* 2.48397	35.93	RMS	32.8	-18	50.73	54	-3.27	-	-	58	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection