



TEST REPORT

Report Number: 13190901-E1V1

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2398

FCC ID : BCG-E3540A


IC : 579C-E3540A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date of Issue:
September 21, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888

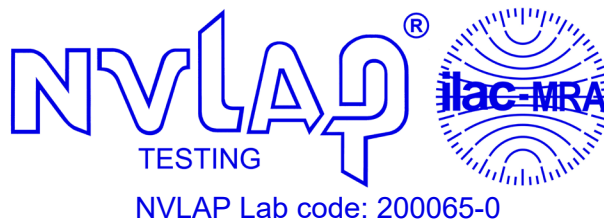

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	9/21/2020	Initial Issue	Vien Tran

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	4
2. TEST RESULTS SUMMARY	5
3. TEST METHODOLOGY	5
4. FACILITIES AND ACCREDITATION	5
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
5.1. METROLOGICAL TRACEABILITY	6
5.2. DECISION RULES.....	6
5.3. MEASUREMENT UNCERTAINTY.....	6
6. INTRODUCTION OF TEST DATA REUSE.....	7
6.1. EUT DESCRIPTION	7
6.2. INTRODUCTION	7
6.3. SPOT CHECK VERIFICATION RESULTS SUMMARY	7
6.4. REFERENCE DETAIL	14
6.5. DESCRIPTION OF AVAILABLE ANTENNAS	14
6.6. SOFTWARE AND FIRMWARE.....	14
6.7. WORST-CASE CONFIGURATION AND MODE.....	14
6.8. DESCRIPTION OF TEST SETUP.....	15
7. TEST AND MEASUREMENT EQUIPMENT	16
8. MEASUREMENT METHODS	16
9. SETUP PHOTOS.....	16
Appendix A – Reference Test Report	17

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A2398

SERIAL NUMBER: (Original): C7CD603Z08HK, C7CCT014Q90Y
(Spot Check): C7CCV009Q8YX, C7CCT008Q908

DATE TESTED: AUGUST 26, 2020 – SEPTEMBER 09, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Francisco Guarnero
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST RESULTS SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911, RSS-GEN Issue 5, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Road
☐ Chamber A	☐ Chamber D	☐ Chamber I
☐ Chamber B	☒ Chamber E	☒ Chamber J
☐ Chamber C	☐ Chamber F	☐ Chamber K
	☐ Chamber G	☒ Chamber L
	☐ Chamber H	☐ Chamber M

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code: 2324A.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.39 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.07 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

6. INTRODUCTION OF TEST DATA REUSE

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

6.2. INTRODUCTION

This application for certification is leveraging the data reuse procedures from KDB 484596 D01 based on reference FCC ID: BCG-E3539A, IC: 579C-E3539A to cover variant BCG-E3540A, 579C-E3540A. The major difference between the parent/reference model and the variant model is the depopulation in the variant model of the mmWave transmitter. All other circuitry and features are identical. The data reuse test plan was approved via manufacturer KDB inquiry.

6.3. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device model A2398, FCC ID: BCG-E3540A, IC: 579C-E3540A for radiated spurious and radiated band-edge in accordance with the Test Plan that was approved via KDB inquiry.

BCG-E3540A / 579C-E3540A SPOT CHECK RESULTS										
Technology	Mode	Test Item	Channel	Measured	Original model		Spot check model		Delta (dB)	
					A2176		A2398			
					BCG-E3539A 579C-E3539A		BCG-E3540A 579C-E3540A			
				Frequency (MHz)	Peak	Ave	Peak	Ave	Peak	Ave
BT	GFSK	RBE	Low	2390.0	52.46	41.15	52.46	38.8	0	-2.35
			High	2483.50	52.95	38.97	53.33	39.52	0.38	0.55
		RSE	Mid	4564	43.5	31.14	42.14	29.3	-1.36	-1.84


Comparison of the models, upper deviation is within 3dB range and all tests are under FCC Technical Limits. The test report for FCC ID: BCG-E3539A, IC: 579C-E3539A is therefore being used to support the application for certification for FCC ID: BCG-E3540A, IC: 579C-E3540A.

Note: The output powers were verified on model A2398 to match with model A2176 before radiated emissions spot check was performed.

SPOT CHECK DATA

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

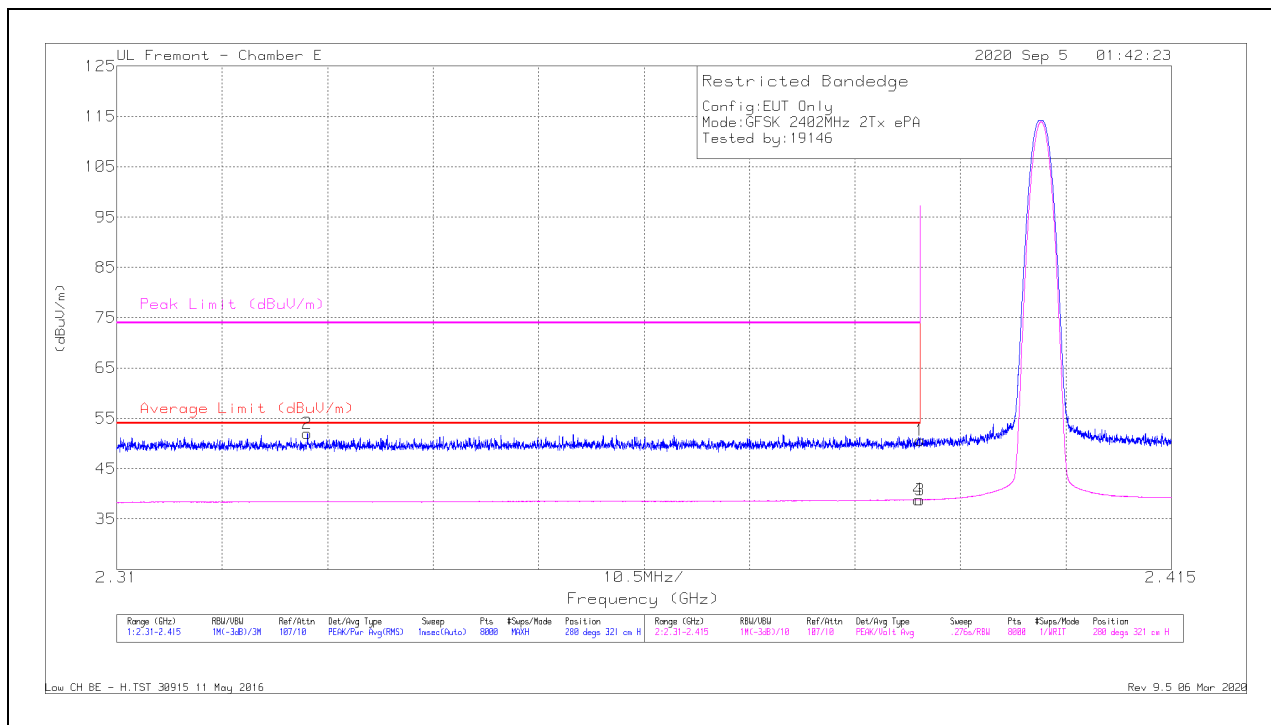


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	44.83	Pk	32.2	-26.4	50.63	-	-	74	-23.37	280	321	H
2	* 2.32898	46.39	Pk	32.1	-26.5	51.99	-	-	74	-22.01	280	321	H
3	* 2.39	33.01	VA1T	32.2	-26.4	38.81	54	-15.19	-	-	280	321	H
4	* 2.38981	33.05	VA1T	32.2	-26.4	38.85	54	-15.15	-	-	280	321	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL RESULT

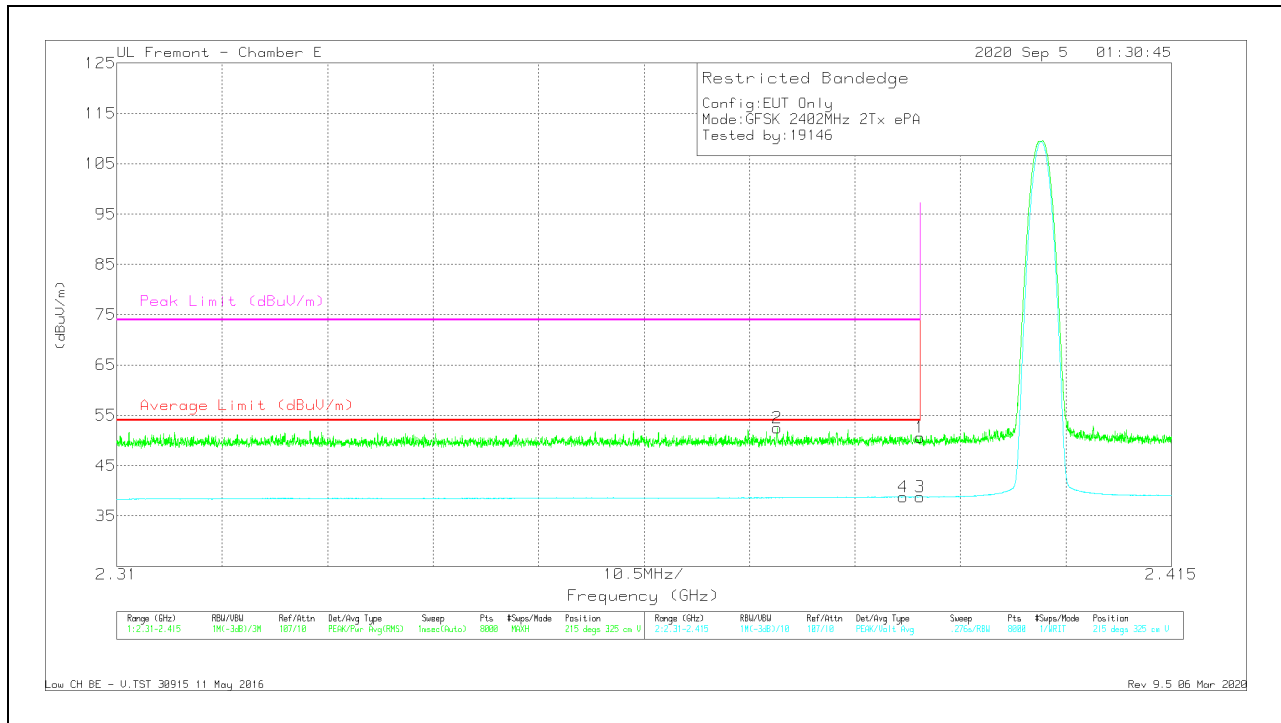

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filt/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	44.86	Pk	32.2	-26.4	50.66	-	-	74	-23.34	215	325	V
2	* 2.37575	46.76	Pk	32.2	-26.5	52.46	-	-	74	-21.54	215	325	V
3	* 2.39	32.98	VA1T	32.2	-26.4	38.78	54	-15.22	-	-	215	325	V
4	* 2.3883	33	VA1T	32.2	-26.4	38.8	54	-15.2	-	-	215	325	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

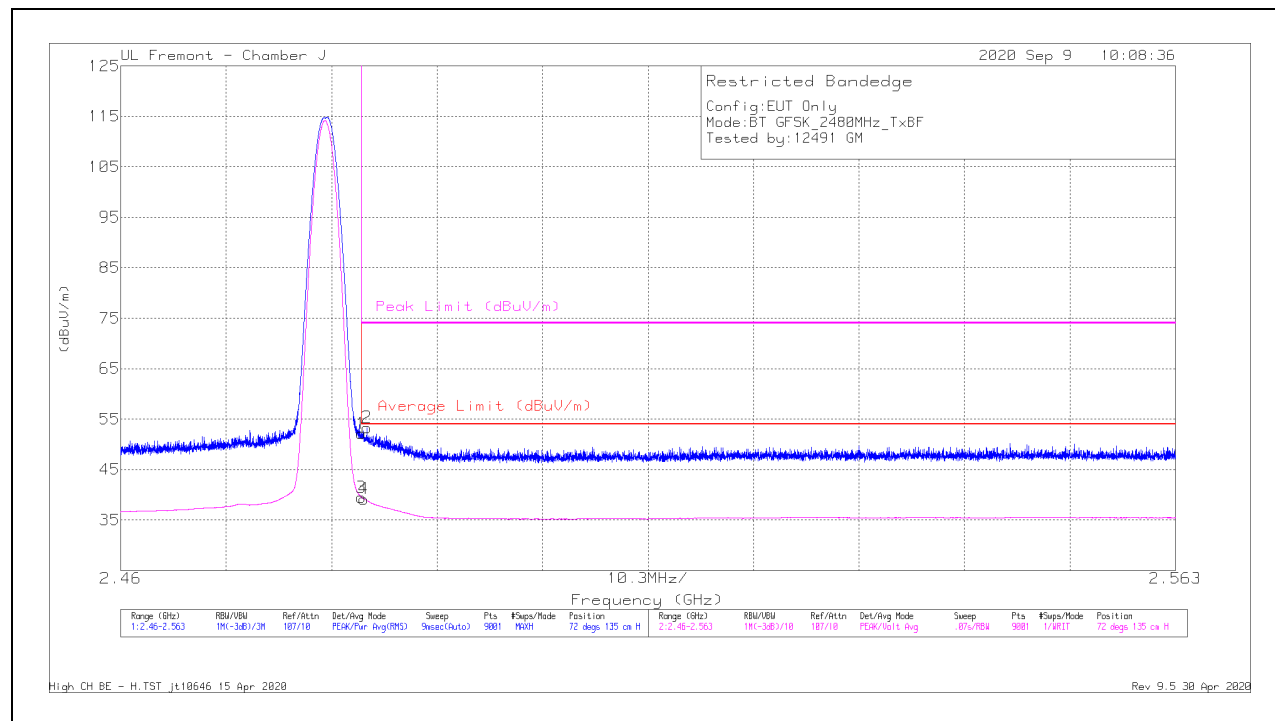

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbll/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	47.84	Pk	29.5	-25.2	52.14	-	-	74	-21.86	72	135	H
2	* 2.48403	49.03	Pk	29.5	-25.2	53.33	-	-	74	-20.67	72	135	H
3	* 2.48351	35.22	VA1T	29.5	-25.2	39.52	54	-14.48	-	-	72	135	H
4	* 2.48375	34.88	VA1T	29.5	-25.2	39.18	54	-14.82	-	-	72	135	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL RESULT

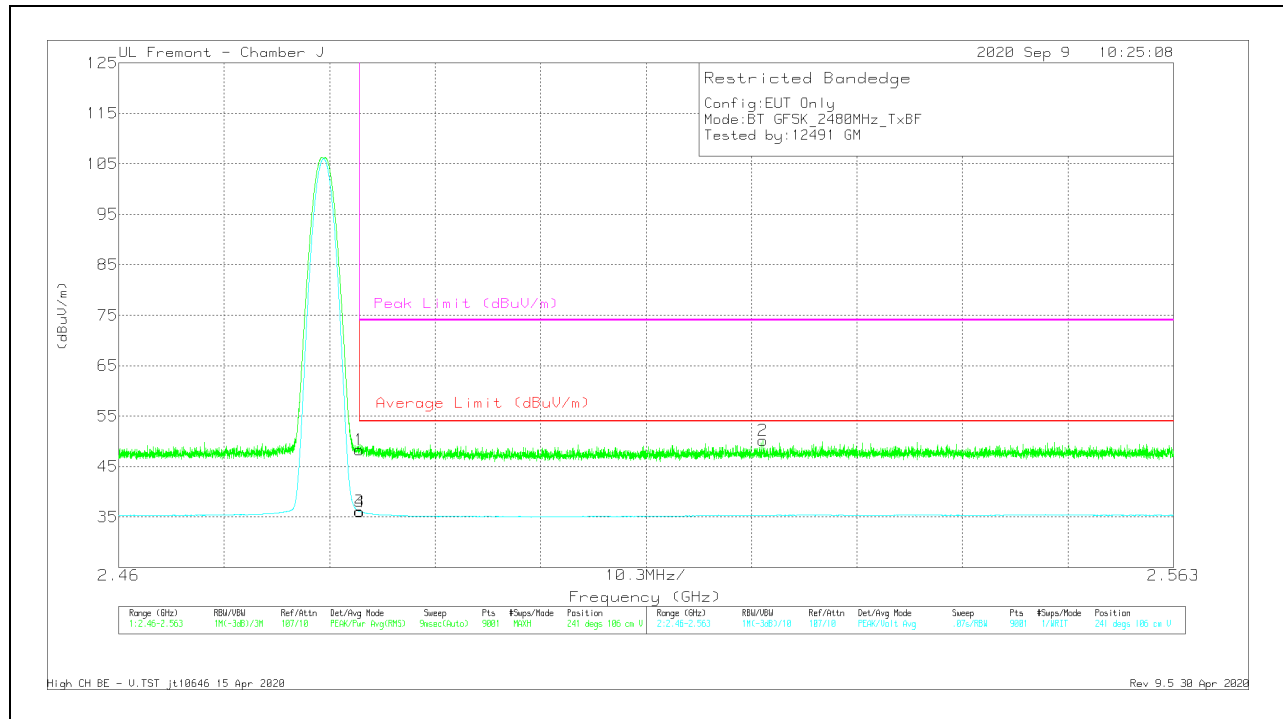

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/FitriPa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.99	Pk	29.5	-25.2	48.29	-	-	74	-25.71	241	106	V
2	2.52292	45.6	Pk	29.8	-25.2	50.2	-	-	74	-23.8	241	106	V
3	* 2.48351	31.8	VA1T	29.5	-25.2	36.1	54	-17.9	-	-	241	106	V
4	* 2.48356	31.74	VA1T	29.5	-25.2	36.04	54	-17.96	-	-	241	106	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

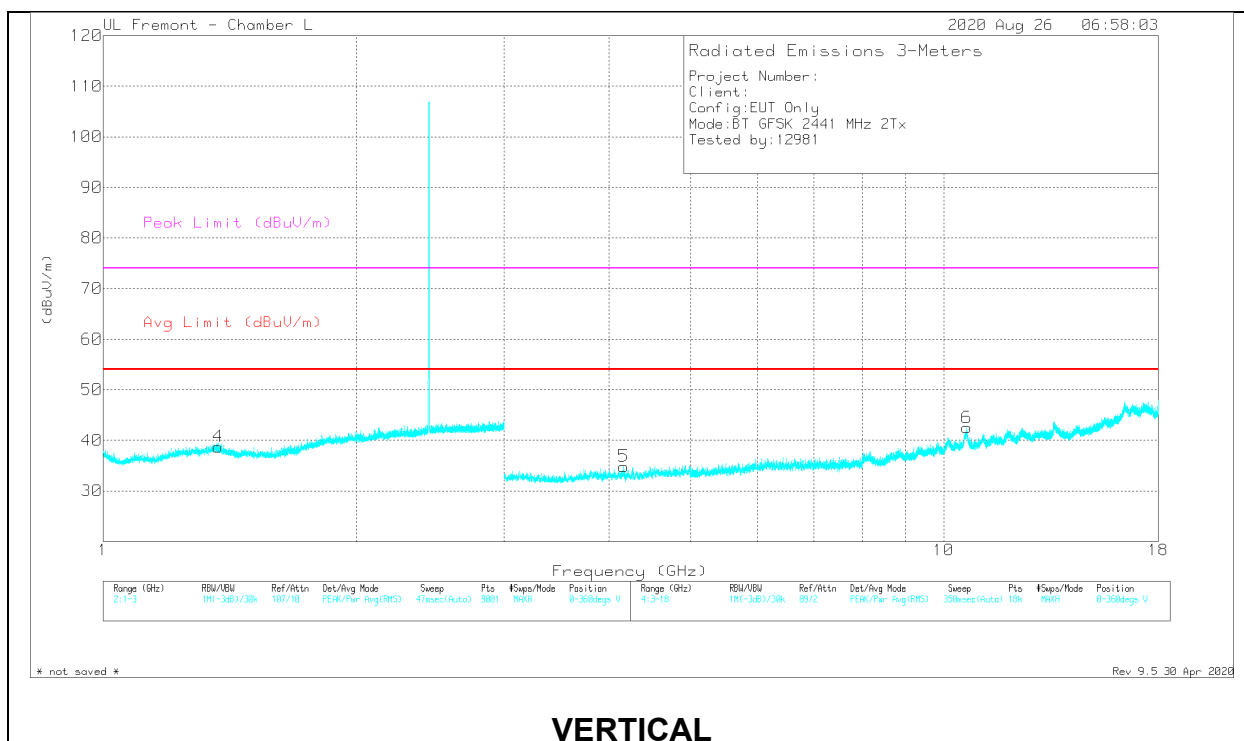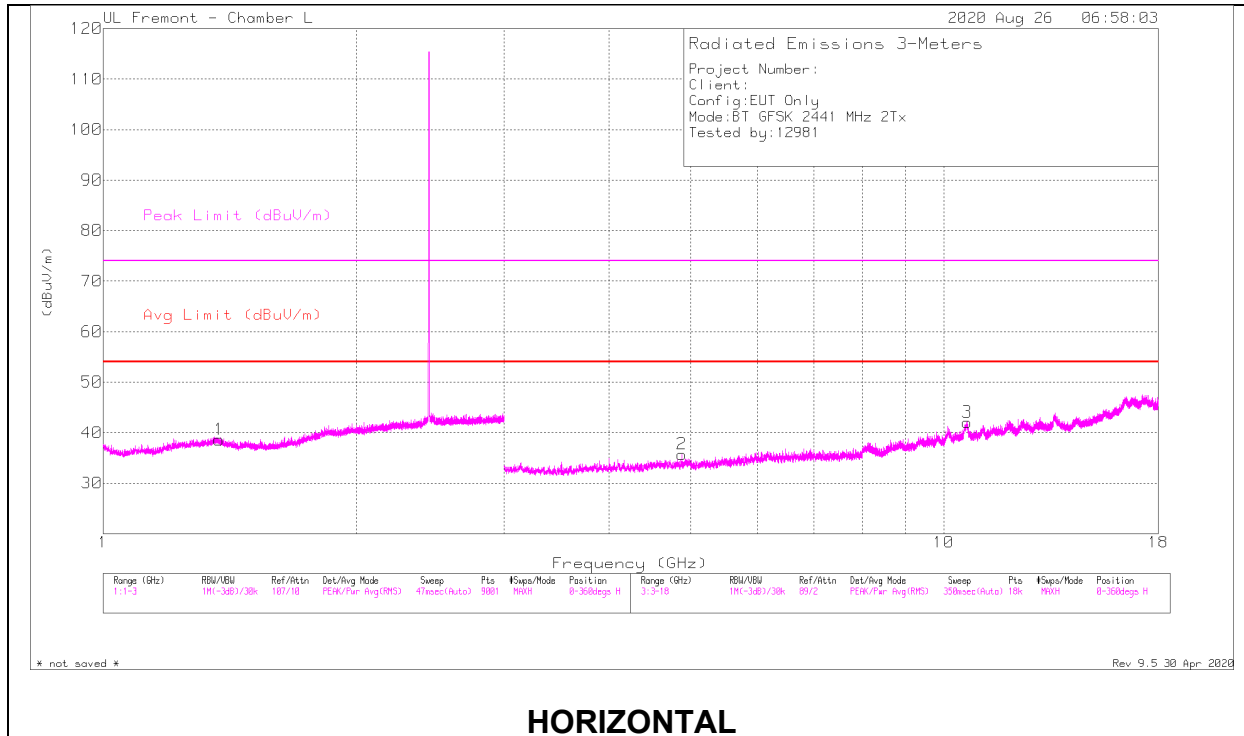

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.3733	42.15	PKFH	29.2	-23.5	47.85	-	-	74	-26.15	94	131	H
	* 1.37275	28.18	VA1T	29.3	-23.5	33.98	54	-20.02	-	-	94	131	H
4	* 1.37159	42.12	PKFH	29.3	-23.5	47.92	-	-	74	-26.08	194	163	V
	* 1.37084	27.99	VA1T	29.3	-23.5	33.79	54	-20.21	-	-	194	163	V
2	* 4.87999	35.14	PKFH	34.1	-27.1	42.14	-	-	74	-31.86	117	110	H
	* 4.87988	22.3	VA1T	34.1	-27.1	29.3	54	-24.7	-	-	117	110	H
3	* 10.65653	28.83	PKFH	38	-17.2	49.63	-	-	74	-24.37	331	220	H
	* 10.65878	15.9	VA1T	38	-17.2	36.7	54	-17.3	-	-	331	220	H
5	* 4.16088	35.62	PKFH	33.6	-27.6	41.62	-	-	74	-32.38	240	186	V
	* 4.16209	22.41	VA1T	33.5	-27.6	28.31	54	-25.69	-	-	240	186	V
6	* 10.65184	29.12	PKFH	37.9	-17.2	49.82	-	-	74	-24.18	185	206	V
	* 10.65569	15.93	VA1T	37.9	-17.2	36.63	54	-17.37	-	-	185	206	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

6.4. REFERENCE DETAIL

Reference application that contains the reused reference data which is attached to this report in Appendix A.

Equipment Class	Reference FCC ID & IC	Reference Report Number	Report Title/Section
DSS	BCG-E3539A 579C-E3539A	13179110-E1	FCC IC_BT Report / All sections

6.5. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	ANT 4 (dBi)	ANT 3 (dBi)
2.4	-2.3	-0.6

6.6. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was 18.1.148.558

6.7. WORST-CASE CONFIGURATION AND MODE

Radiated band edge and spurious emissions from 1GHz to 18GHz were performed based on the Model A2176 worst case with the EUT set at highest power at Low/Middle/High channels.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.


6.8. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	A1398	C02PM012G3QD		QDS-BRCM1069
Laptop AC/DC adapter		Liteon Technology	PA-1450-BA1	B123		N/A
EUT AC/DC adapter		Apple	A1385	D29325SM03XDHLHC9		N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A

TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz

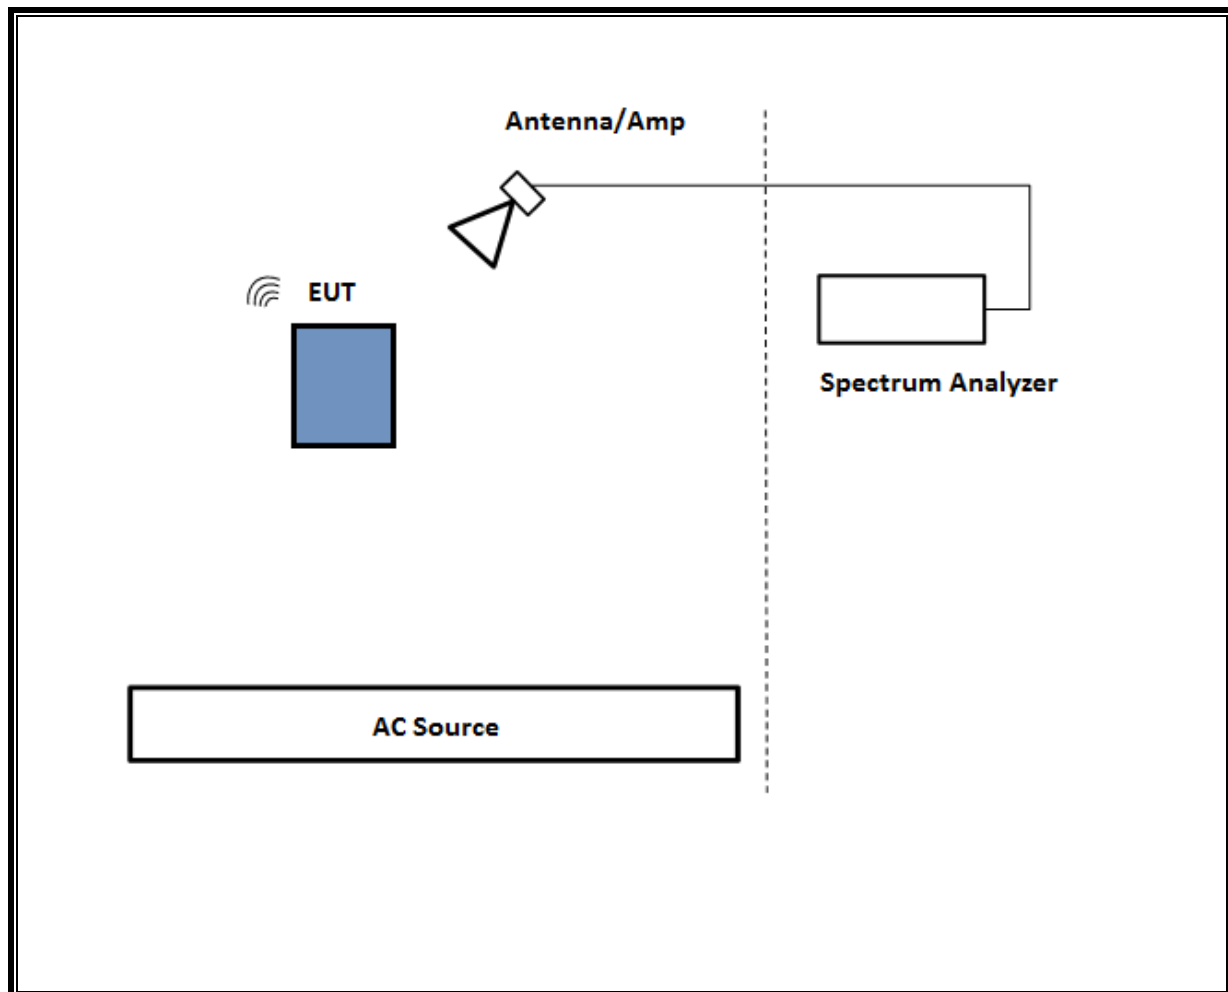

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	T1466	01/23/2021	01/23/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T712	03/09/2021	03/09/2020
RF Filter Box, 1-18GHz	UL (IN HOUSE)	N/A	PRE0182865	03/03/2021	03/03/2020
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179372	02/25/2021	02/25/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T963	01/25/2021	01/25/2020
RF Filter Box, 1-18GHz	UL (IN HOUSE)	N/A	PRE0181597	08/20/2021	08/20/2020
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179367	02/26/2021	02/26/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	05/26/2021	05/26/2020
RF Filter Box, 1-18GHz	FREMONT	SAC-L1	PRE0180571	04/14/2021	04/14/2020
Power Meter, P-series single channel	Keysight	N1911A	PRE0177682	01/21/2021	01/21/2020
Power Sensor	Keysight	N1921A	T1226	02/13/2021	02/13/2020

*Testing is completed before equipment expiration date.

8. MEASUREMENT METHODS

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4 & 13

Radiated Spurious Emissions 30-1000MHz: ANSI C63.10-2013 Section 6.3, 6.5 & 13

Radiated Spurious Emissions above 1GHz: ANSI C63.10-2013 Section 6.3, 6.6 & 13

Radiated Band-edge: ANSI C63.10-2013 Section 6.10.5 & 13

9. SETUP PHOTOS

Please refer to 13179110-EP1 for setup photos

END OF TEST REPORT

Appendix A – Reference Test Report

Attached is the test report (13179110-E1) containing the reference data from the parent model as detailed in section 6.4.



TEST REPORT

Report Number: 13179110-E1V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

Model : A2176

FCC ID : BCG-E3539A

IC : 579C-E3539A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date of Issue:
September 30, 2020

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	9/21/2020	Initial Issue	Vien Tran
V2	9/30/2020	Addressed TCB Questions	Francisco Guarnero

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST SUMMARY	7
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
5.1. METROLOGICAL TRACEABILITY	8
5.2. DECISION RULES.....	8
5.3. MEASUREMENT UNCERTAINTY.....	8
6. EQUIPMENT UNDER TEST	9
6.1. EUT DESCRIPTION	9
6.2. MAXIMUM OUTPUT POWER.....	9
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
6.4. SOFTWARE AND FIRMWARE.....	10
6.5. WORST-CASE CONFIGURATION AND MODE	10
6.6. DESCRIPTION OF TEST SETUP.....	11
7. TEST AND MEASUREMENT EQUIPMENT	16
8. MEASUREMENT METHODS	17
9. ANTENNA PORT TEST RESULTS	18
9.1. ON TIME AND DUTY CYCLE.....	18
9.2. 20 dB AND 99% BANDWIDTH	20
9.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION	21
9.2.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....	22
9.2.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	23
9.2.4. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION	24
9.3. HOPPING FREQUENCY SEPARATION	25
9.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION.....	26
9.4. NUMBER OF HOPPING CHANNELS.....	27
9.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION	28
9.5. AVERAGE TIME OF OCCUPANCY.....	30
9.5.1. HIGH POWER BASIC DATA RATE GFSK MODULATION	31
9.6. OUTPUT POWER.....	35
9.6.1. HIGH POWER BASIC DATA RATE GFSK MODULATION	36

9.6.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....	36
9.6.3.	HIGH POWER ENHANCED DATA RATE QPSK MODULATION	37
9.6.4.	HIGH POWER ENHANCED DATA RATE TXBF QPSK MODULATION	37
9.6.5.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	38
9.6.6.	HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION	38
9.6.7.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	39
9.6.8.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION.....	39
9.6.9.	LOW POWER ENHANCED DATA RATE QPSK MODULATION	40
9.6.10.	LOW POWER ENHANCED DATA RATE TXBF QPSK MODULATION.....	40
9.6.11.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	41
9.6.12.	LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION	41
9.7.	AVERAGE POWER.....	42
9.7.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	43
9.7.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....	43
9.7.3.	HIGH POWER ENHANCED DATA RATE QPSK MODULATION	44
9.7.4.	HIGH POWER BASIC DATA RATE TXBF QPSK MODULATION.....	44
9.7.5.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	45
9.7.6.	HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION	45
9.7.7.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	46
9.7.8.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION.....	46
9.7.9.	LOW POWER ENHANCED DATA RATE QPSK MODULATION	47
9.7.10.	LOW POWER BASIC DATA RATE TXBF QPSK MODULATION.....	47
9.7.11.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	48
9.7.12.	LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION.....	48
9.8.	CONDUCTED SPURIOUS EMISSIONS.....	49
9.8.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	50
9.8.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION.....	54
9.8.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	58
9.8.4.	HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION	62
9.8.5.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	66
9.8.6.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION.....	70
9.8.7.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	74
9.8.8.	LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION	78
10.	RADIATED TEST RESULTS	82
10.1.	TRANSMITTER ABOVE 1 GHz.....	84
10.1.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	84
10.1.2.	HIGH POWER BASIC DATA RATE TX BF GFSK MODULATION	92
10.1.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	102
10.1.4.	HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION.....	110
10.1.5.	LOW POWER BASIC DATA RATE GFSK MODULATION	114
10.1.6.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION	122
10.1.7.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	126
10.1.8.	LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION	134
10.2.	WORST CASE BELOW 1 GHZ.....	138
10.3.	WORST CASE 18-26 GHZ.....	140
11.	AC POWER LINE CONDUCTED EMISSIONS	142
11.1.	AC POWER LINE WITH LAPTOP.....	143
11.2.	AC POWER LINE WITH AC/DC ADAPTER	145

12. SETUP PHOTOS	147
-------------------------------	------------

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMARTPHONE

MODEL: A2716

SERIAL NUMBER: C7CD603Z08HK, C7CCT014Q90Y

DATE TESTED: MAY 12, 2020 – SEPTEMBER 06, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Tony Li
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	Per ANSI C63.10, Section 11.6.
See Comment	RSS-GEN 6.7	20dB BW/99% OBW	Reporting purposes only	ANSI C63.10 Sections 6.9.2 and 6.9.3
15.247 (a)(1)	RSS-247 (5.1) (b)	Hopping Frequency Separation	Complies	None.
15.247 (a)(1)(iii)	RSS-247 (5.1) (d)	Number of Hopping Channels	Complies	None.
15.247 (a)(1)(iii)	RSS-247 (5.1) (d)	Average Time of Occupancy	Complies	None.
15.247 (b)(1)	RSS-247 (5.4) (b)	Output Power	Complies	None.
See Comment		Average Power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (d)	RSS-247 (5.5)	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911, RSS-GEN Issue 5, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
☐ Chamber A (IC:2324B-1)	☐ Chamber D (IC:22541-1)	☒ Chamber I (IC: 2324A-5)
☐ Chamber B (IC:2324B-2)	☒ Chamber E (IC:22541-2)	☒ Chamber J (IC: 2324A-6)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:22541-3)	☒ Chamber K (IC: 2324A-1)
	☐ Chamber G (IC:22541-4)	☐ Chamber L (IC: 2324A-3)
	☐ Chamber H (IC:22541-5)	☐ Chamber M (IC: 2324A-2)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.39 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.07 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Config	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
ANT 4	High Power	2402 - 2480	Basic GFSK	20.56	113.76
		2402 - 2480	DQPSK	18.28	67.30
		2402 - 2480	Enhanced 8PSK	18.34	68.23
	Low Power	2402 - 2480	Basic GFSK	12.91	19.54
		2402 - 2480	DQPSK	11.23	13.27
		2402 - 2480	Enhanced 8PSK	11.29	13.46
ANT 3	High Power	2402 - 2480	Basic GFSK	20.45	110.92
		2402 - 2480	DQPSK	18.29	67.45
		2402 - 2480	Enhanced 8PSK	18.32	67.92
	Low Power	2402 - 2480	Basic GFSK	12.84	19.23
		2402 - 2480	DQPSK	11.29	13.46
		2402 - 2480	Enhanced 8PSK	11.33	13.58
BF, ANT 4 + ANT 3	High Power	2402 - 2480	Basic GFSK TxBF	20.39	109.40
		2402 - 2480	DQPSK TxBF	20.27	106.41
		2402 - 2480	Enhanced 8PSK TxBF	20.29	106.91
	Low Power	2402 - 2480	Basic GFSK TxBF	15.83	38.28
		2402 - 2480	DQPSK TxBF	14.31	26.98
		2402 - 2480	Enhanced 8PSK TxBF	14.34	27.16

Note: GFSK, DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on these modes to showing compliance. For average power data please refer to section 9.7.

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	ANT 4 (dBi)	ANT 3 (dBi)
2.4	-2.3	-0.6

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was FW Version: 18.1.148.558

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y and Z on ANT 4 and ANT 3, it was determined that X (Flatbed) was the worst-case orientation for ANT 4 and 2TX Beamforming and Y (Landscape) orientation for ANT 3.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit.

For below 1GHz tests EUT was connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

For simultaneous transmission of multiple channels in the 2.4GHz BT and 5GHz bands, No noticeable emission was found.

GFSK, DQPSK, 8PSK average power are all investigated, The GFSK & 8PSK power are the worst case. For average power data please refer to section 9.7.

Worst-case data rates as provided by the client were:

GFSK mode: DH5
8PSK mode: 3-DH5
Beamforming: GFSK, DH5, 8PSK, 3-DH5

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.


6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	A1398	C02PM012G3QD		DQS-BRCM1069
Laptop AC/DC adapter		Liteon Technology	PA-1450-BA1	B123		N/A
EUT AC/DC adapter		Apple	A1385	D29325SM03XDHLHC9		N/A
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1.0	N/A
3	AC	1	AC	Un-shielded	2	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A


TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.


SETUP DIAGRAM FOR CONDUCTED TESTS

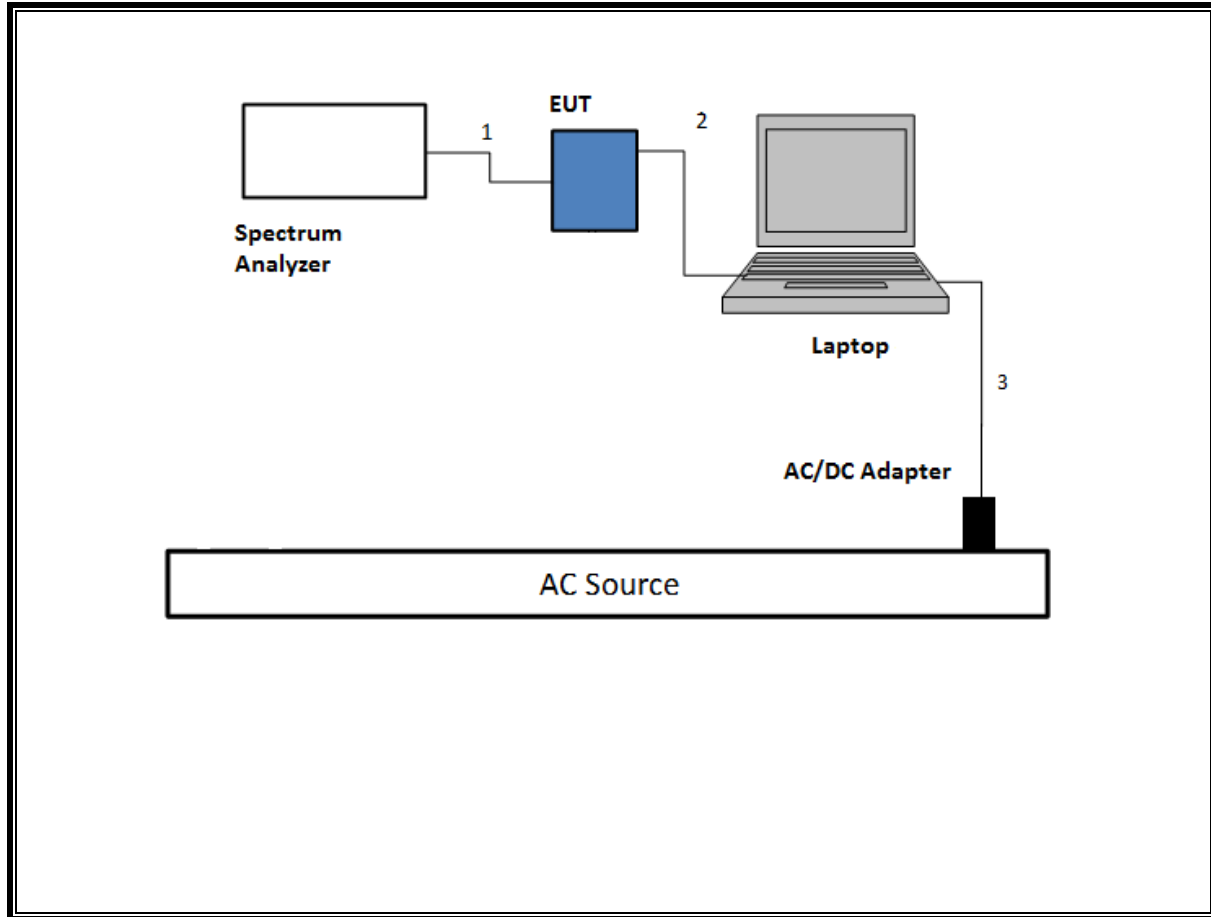


SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz

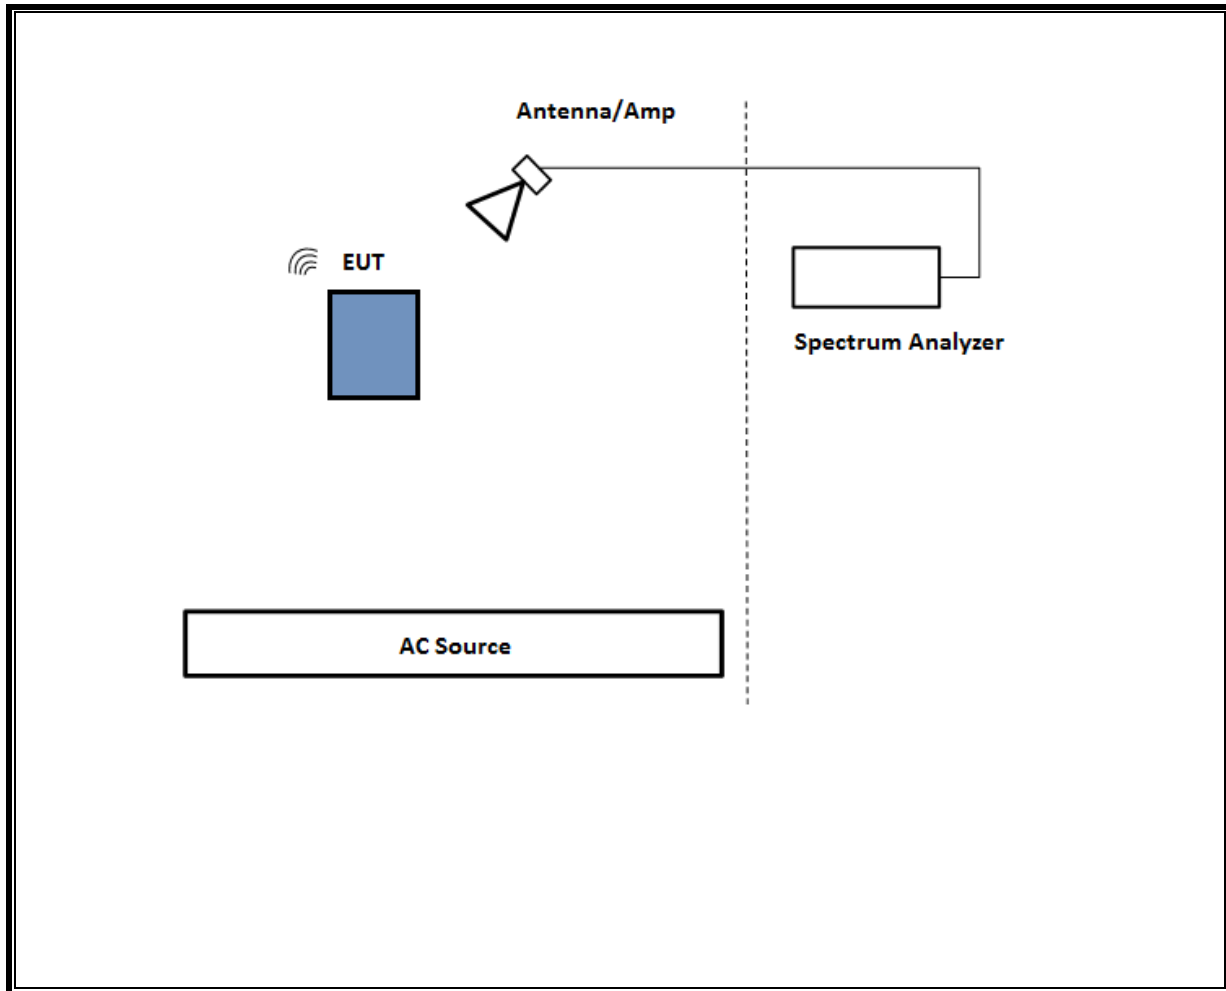

SETUP DIAGRAM FOR Below 1GHz and AC LINE CONDUCTED TEST

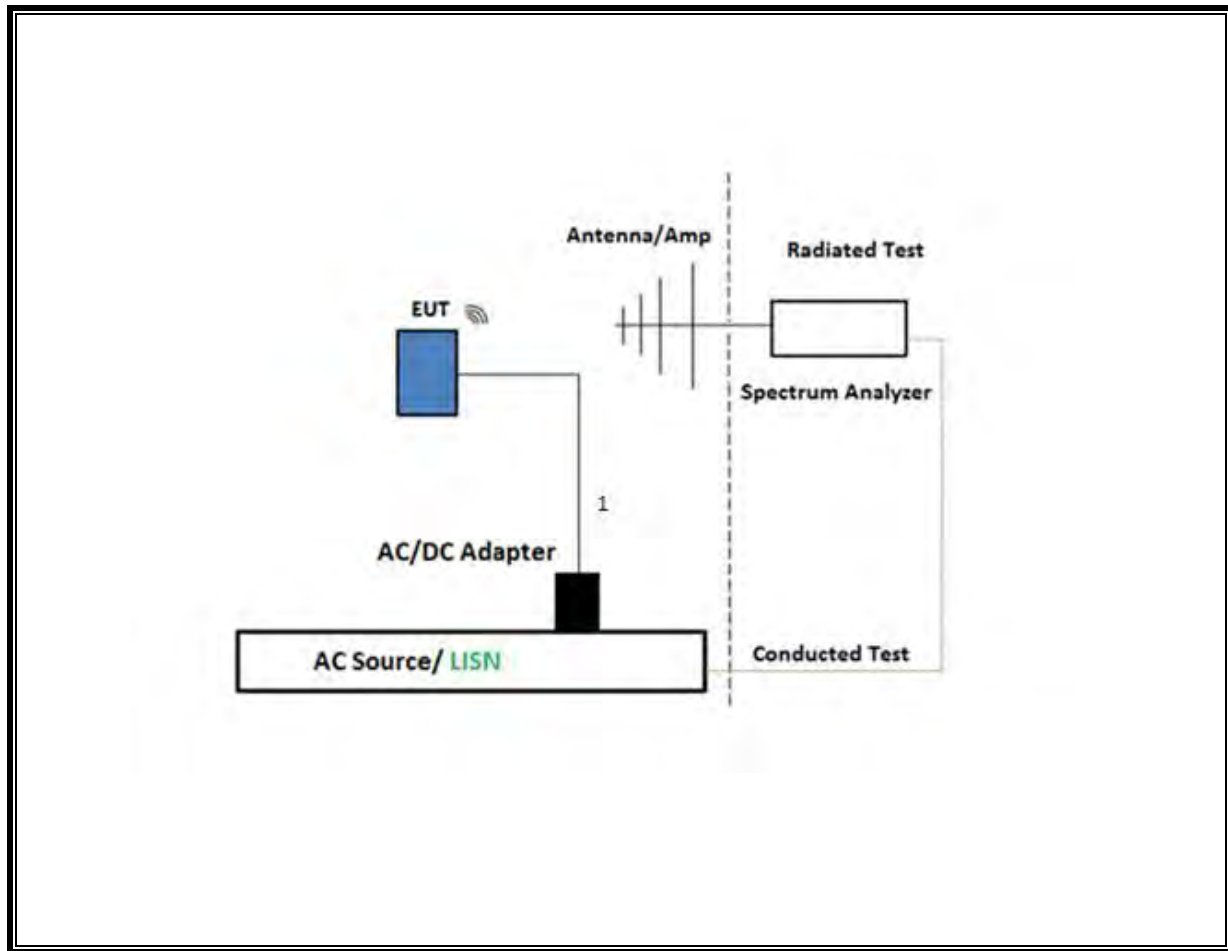

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

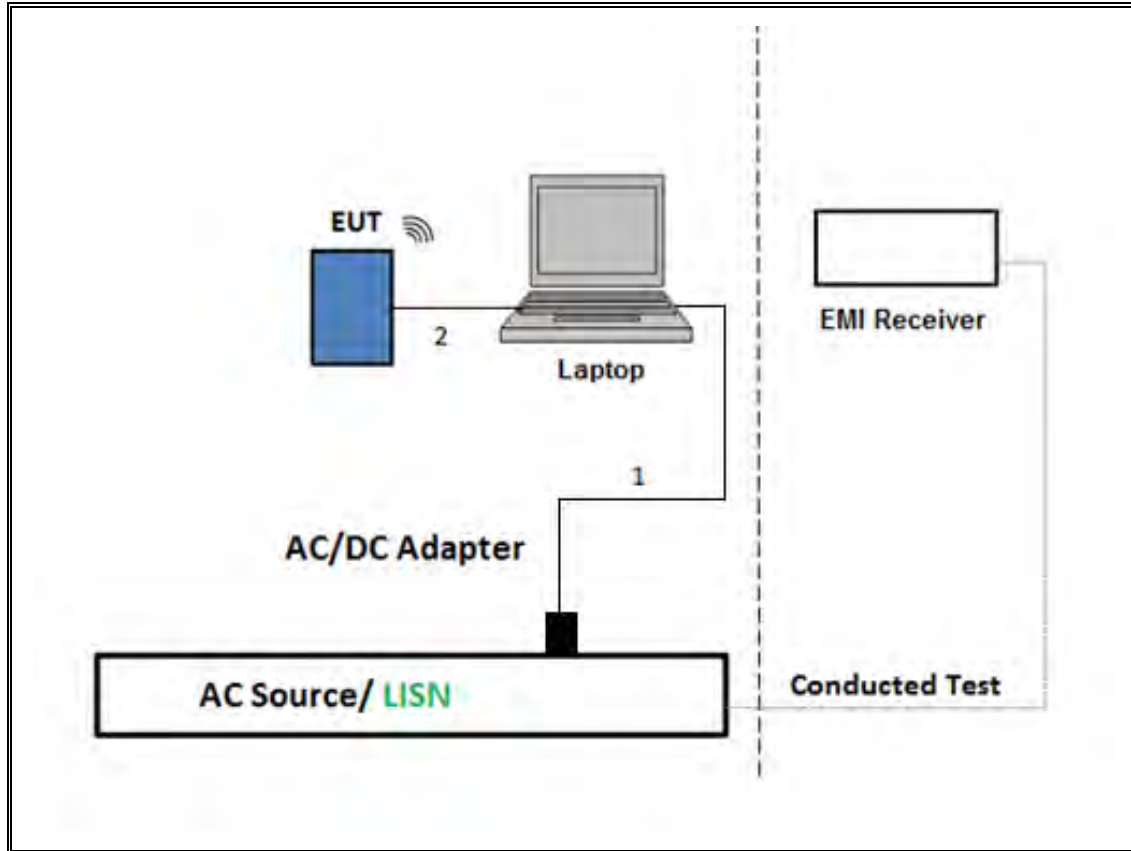

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	T1466	01/23/2021	01/23/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T712	03/09/2021	03/10/2020
Amplifier, 1 to 18GHz, 35dB	AMPLICAL	AMP1G18-35	138301	03/03/2021	03/03/2020
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179522	02/20/2021	02/20/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T346	07/20/2021	07/20/2020
RF Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	171460	05/06/2021	05/06/2020
EMI Test Receiver	Rohde & Schwarz	ESW44	PRE0179372	02/25/2021	02/25/2020
Antenna, Horn Double Ridge Guide 700MHz to 18GHz	A.H. Systems, Inc.	SAS-571	T963	01/25/2021	01/25/2020
*Amplifier, 1 to 18GHz, 35dB	AMPLICAL	AMP1G18-35	T1571	08/20/2021	08/20/2020
*Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T899	08/23/2020	08/23/2019
*Amplifier, 9kHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	PRE0180174	06/01/2020	06/01/2019
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179376	04/03/2021	04/03/2020
Antenna, Horn	ETS-Lindgren	3117	EMC4294	11/01/2020	06/14/2020
Amplifier, 100MHz-18GHz	AMPLICAL	AMP0.1G18-47-20	PRE0197319	05/04/2021	05/04/2020
Antenna Horn, 18 to 26GHz	ARA	SWH-28	T125	04/17/2021	04/17/2020
Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	04/08/2021	04/08/2020
Power Meter, P-series single channel	Keysight	N1911A	PRE0177682	01/21/2021	01/21/2020
Power Sensor	Keysight	N1921A	T1226	02/13/2021	02/13/2020

AC Line Conducted					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	T1436	02/20/2021	02/20/2020
Power Cable, Line Conducted Emissions	UL	PR1	T861	10/27/2020	10/27/2019
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN-50/250-25-2-01	PRE0186446	01/23/2021	01/23/2020
UL AUTOMATION SOFTWARE					
Radiated Software	UL	UL EMC	Ver 9.5, Mar 6, 2020		
Conducted Software	UL	UL EMC	2020.2.26		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, February 21, 2020		

*Testing was completed before equipment calibration date

8. MEASUREMENT METHODS

On Time and Duty Cycle: ANSI C63.10-2013 Section 11.6

Occupied BW (20dB): ANSI C63.10-2013 Section 6.9.2

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Carrier Frequency Separation: ANSI C63.10-2013 Section 7.8.2

Number of Hopping Frequencies: ANSI C63.10-2013 Section 7.8.3

Time of Occupancy (Dwell Time): ANSI C63.10-2013 Section 7.8.4

Peak Output Power: ANSI C63.10-2013 Section 7.8.5

Conducted Spurious Emissions: ANSI C63.10-2013 Section 7.8.8

Conducted Band-Edge: ANSI C63.10-2013 Section 6.10.4

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4 & 13

Radiated Spurious Emissions 30-1000MHz: ANSI C63.10-2013 Section 6.3, 6.5 & 13

Radiated Spurious Emissions above 1GHz: ANSI C63.10-2013 Section 6.3, 6.6 & 13

Radiated Band-edge: ANSI C63.10-2013 Section 6.10.5 & 13

AC Powerline conducted emissions: ANSI C63.10-2013, Section 6.2.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

ANSI C63.10, Section 11.6: Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
Bluetooth GFSK	3.14	3.14	1.00	100.0	0.00	0.010
Bluetooth 8PSK	3.61	3.61	1.00	100.0	0.00	0.010
Bluetooth GFSK TxBF	3.14	3.14	1.00	100.0	0.00	0.010
Bluetooth 8PSK TxBF	3.98	3.98	1.00	100.0	0.00	0.010

Note: Low power duty cycle is same as high power




BLUETOOTH GFSK



BLUETOOTH 8PSK



BLUETOOTH TxBF GFSK

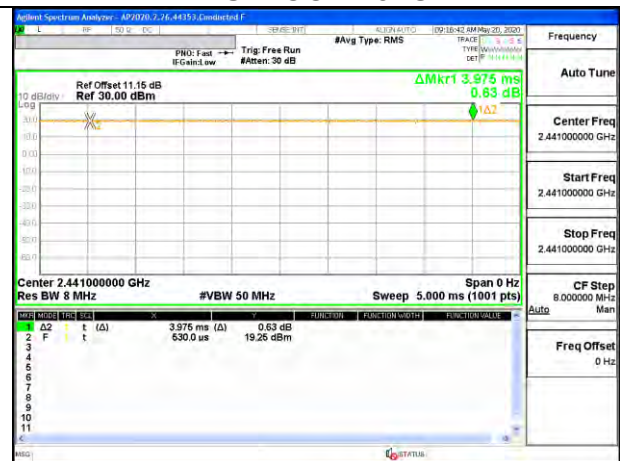

BLUETOOTH TxBF 8PSK

9.2. 20 dB AND 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq 3 \times \text{RBW}$. The sweep time is coupled.


RESULTS

Only High-Power modes result is reported, it covers all Low Power modes. Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION


ANT 4

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.862	0.873
Mid	2441	0.883	0.873
High	2480	0.883	0.872

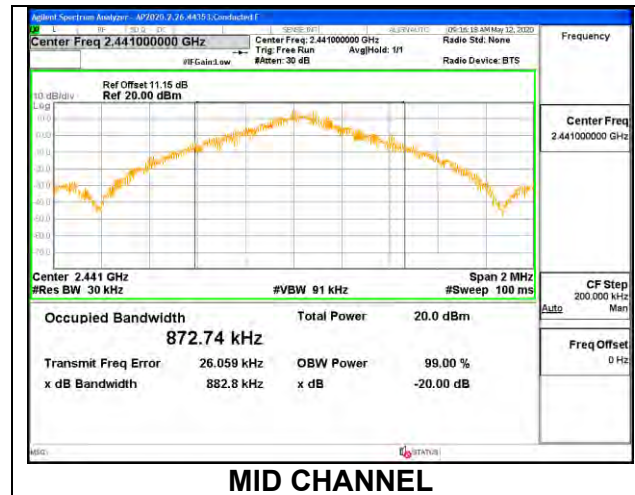

ANT 3


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.927	0.875
Mid	2441	0.927	0.875
High	2480	0.927	0.873

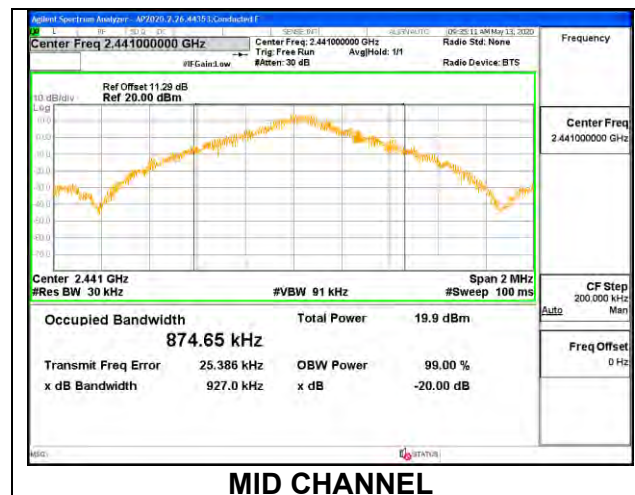

9.2.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION

Channel	Frequency (MHz)	20dB Bandwidth ANT 4 (MHz)	20dB Bandwidth ANT 3 (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2402	0.887	0.919	0.875	0.873
Mid	2441	0.873	0.917	0.873	0.874
High	2480	0.883	0.917	0.872	0.873


Note: Test procedures and setting on beamforming mode are same as BT basic and EDR mode

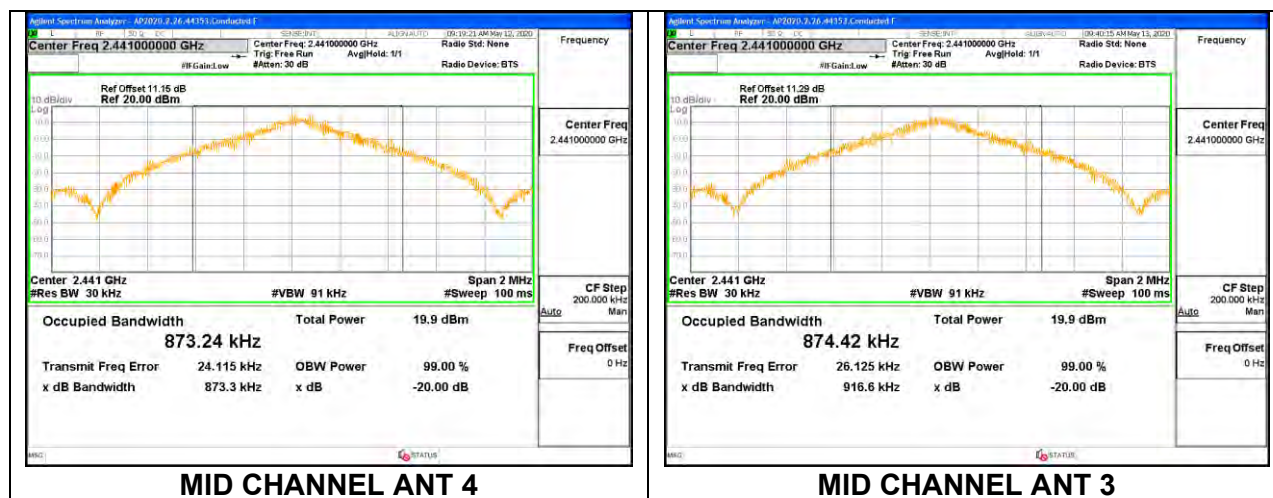

9.2.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION


ANT 4

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.363	1.215
Mid	2441	1.354	1.214
High	2480	1.364	1.225

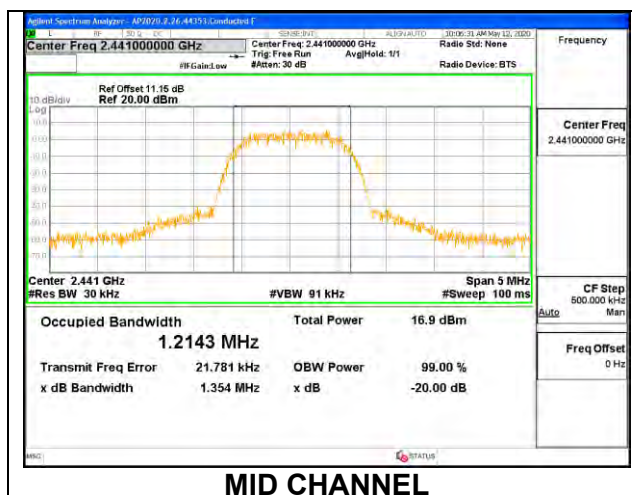



ANT 3

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.355	1.223
Mid	2441	1.347	1.215
High	2480	1.369	1.216

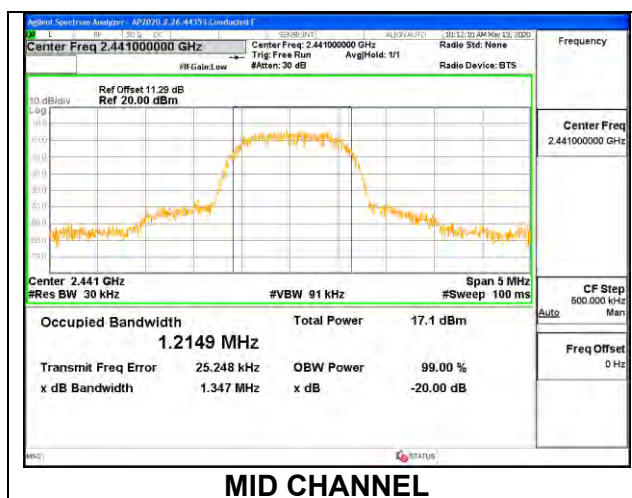

9.2.4. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

Channel	Frequency (MHz)	20dB Bandwidth ANT 4 (MHz)	20dB Bandwidth ANT 3 (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2402	1.343	1.368	1.211	1.221
Mid	2441	1.338	1.335	1.211	1.214
High	2480	1.377	1.367	1.224	1.213

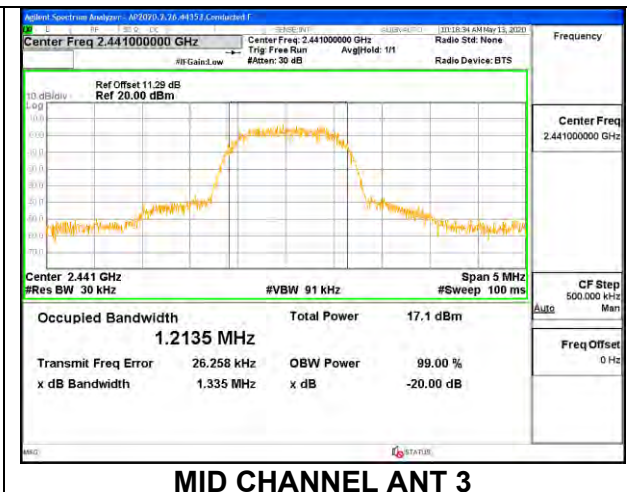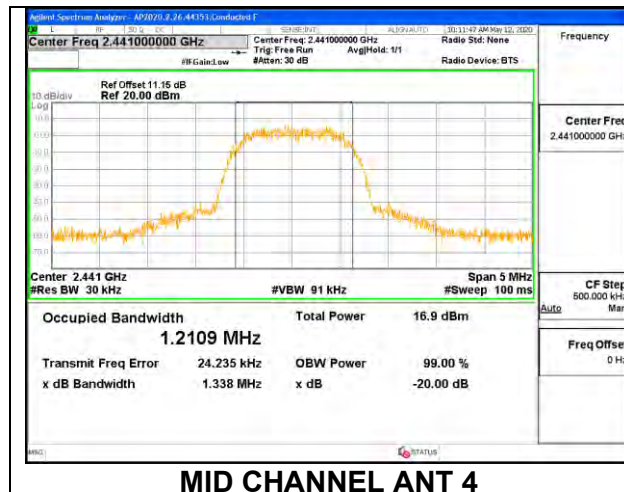

9.3. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to $VBW \geq 3 \times RBW$. The sweep time is coupled.

RESULTS

Only High Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same channel plan.

9.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

HOPPING FREQUENCY SEPARATION

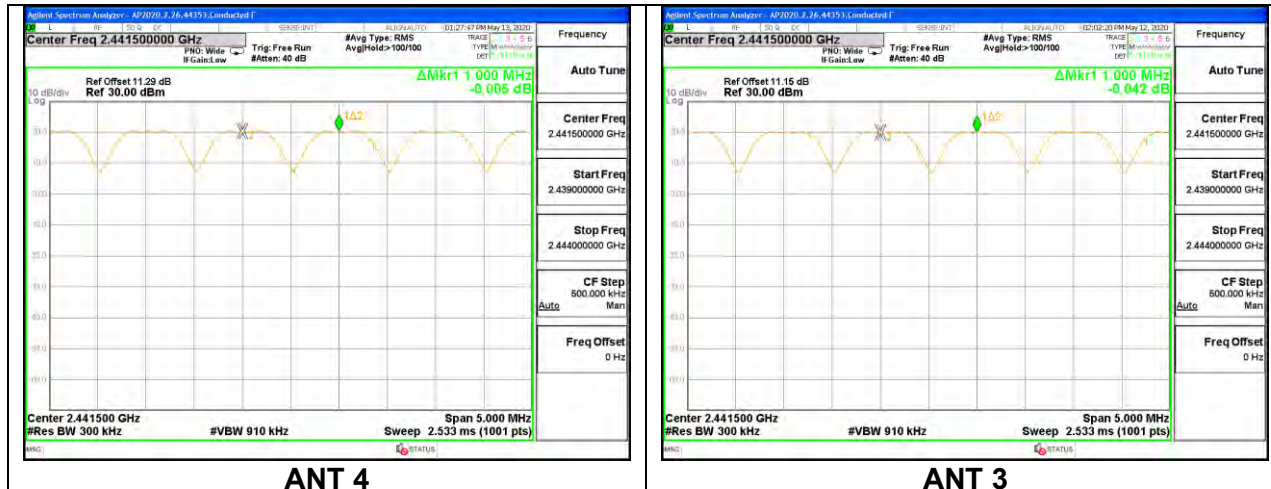

9.4. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels Observed. Only High Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same channel plan.

9.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

ANT 4

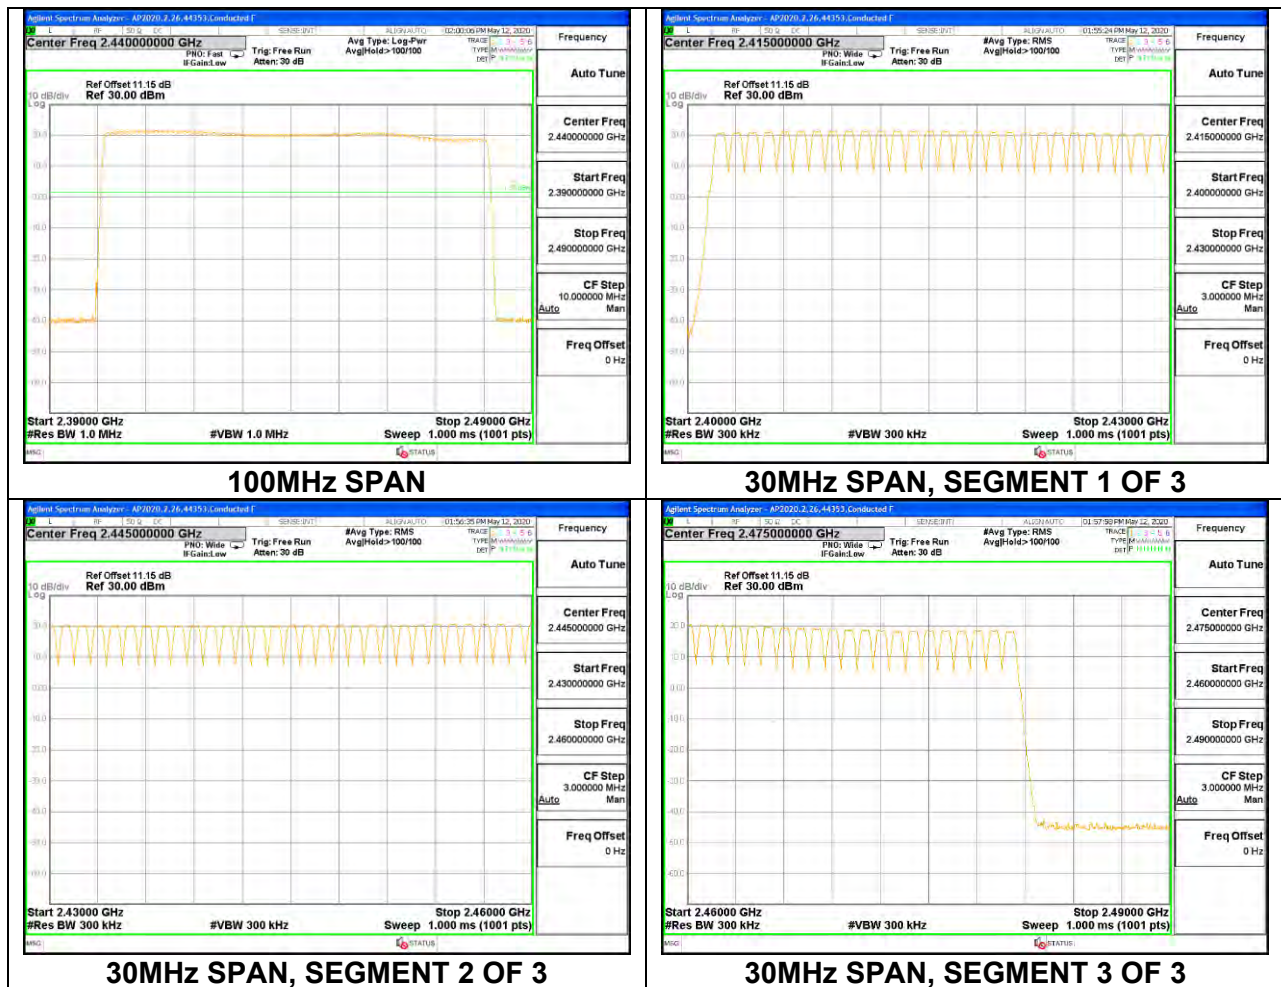

ANT 3

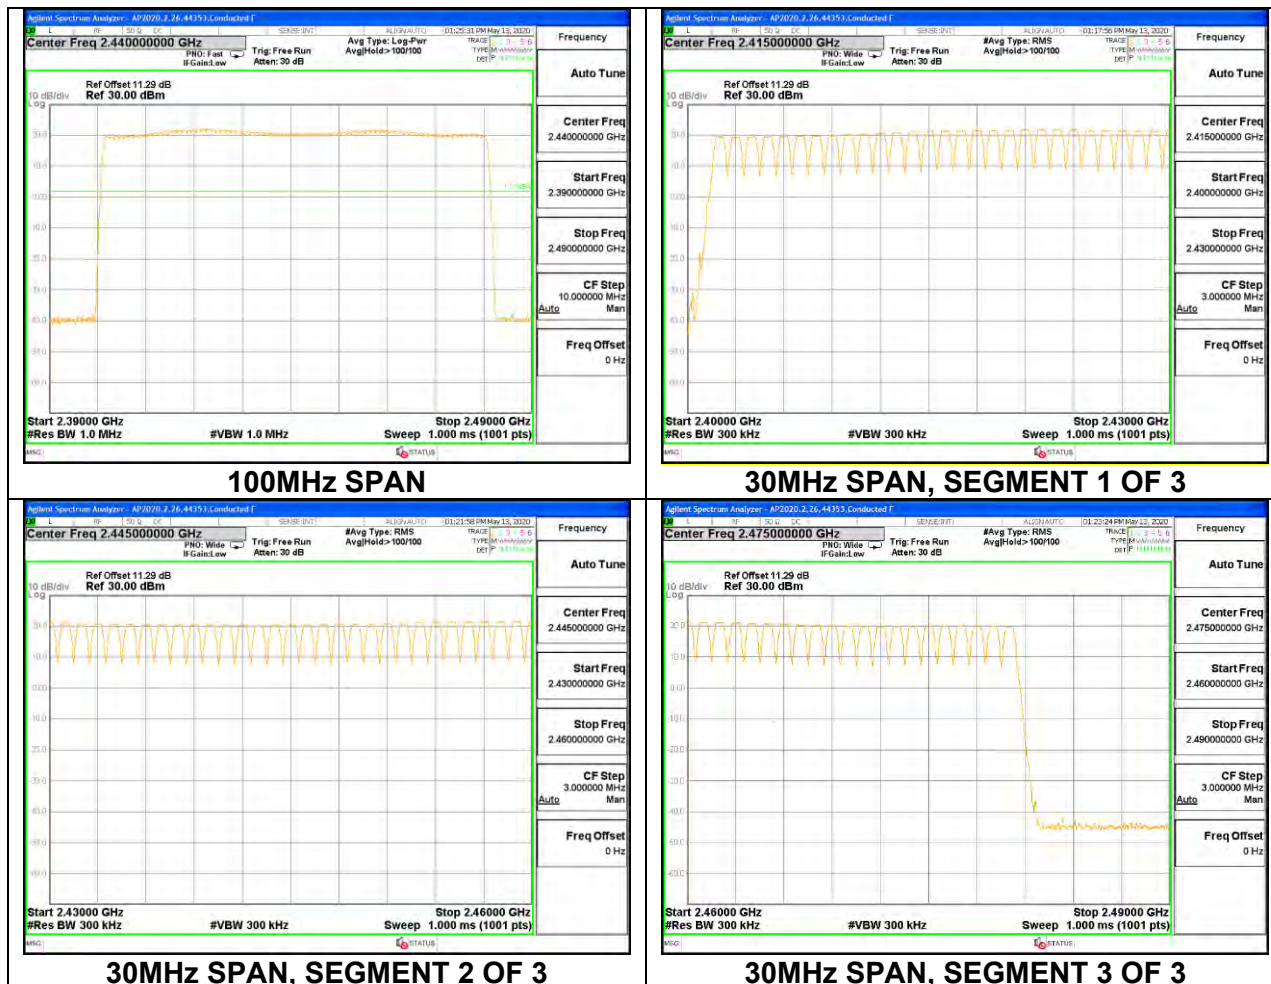

9.5. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


RESULTS

Only High Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same timing.


9.5.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

ANT 4

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.367	31	0.114	0.4	-0.286
DH3	1.620	16	0.259	0.4	-0.141
DH5	2.860	9	0.257	0.4	-0.143
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.367	7.75	0.028	0.4	-0.372
DH3	1.62	4	0.065	0.4	-0.335
DH5	2.86	2.25	0.064	0.4	-0.336

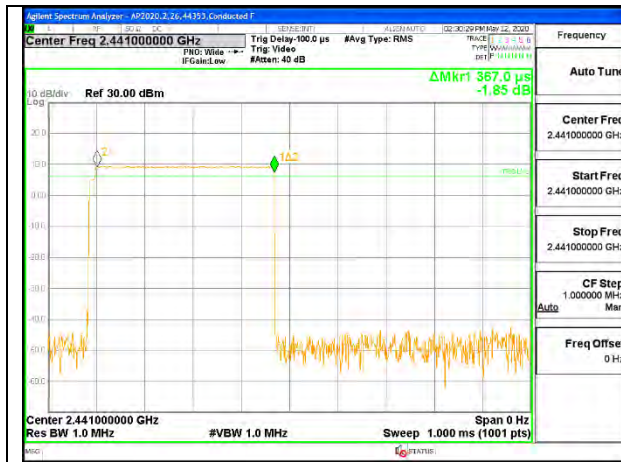

PULSE WIDTH – DH1

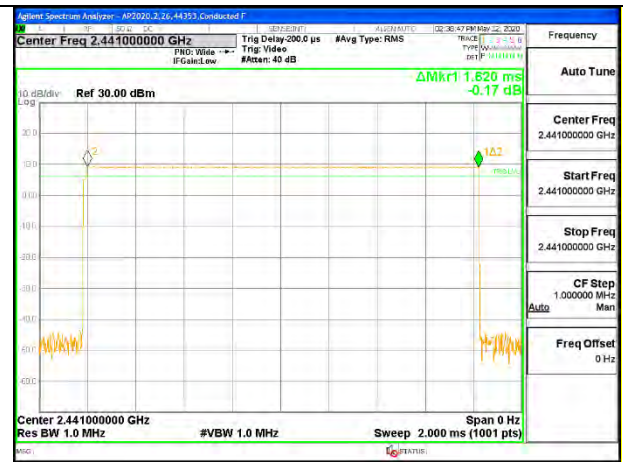

PULSE WIDTH – DH3



PULSE WIDTH – DH5



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH1**




**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH3**




**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH5**

ANT 3

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.367	31	0.114	0.4	-0.286
DH3	1.620	15	0.243	0.4	-0.157
DH5	2.860	10	0.286	0.4	-0.114
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.367	7.75	0.028	0.4	-0.372
DH3	1.62	3.75	0.061	0.4	-0.339
DH5	2.86	2.5	0.072	0.4	-0.329

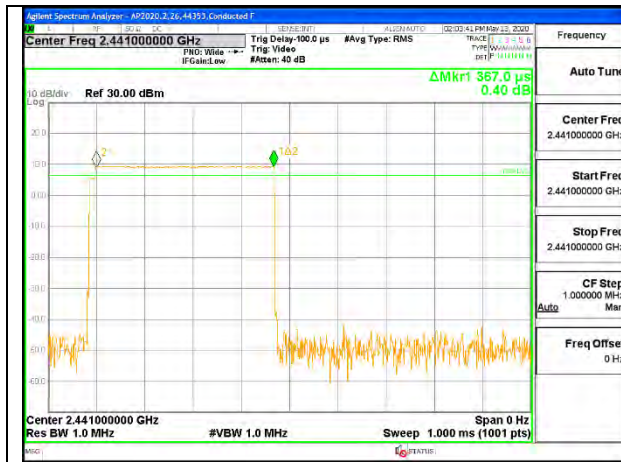

PULSE WIDTH - DH1

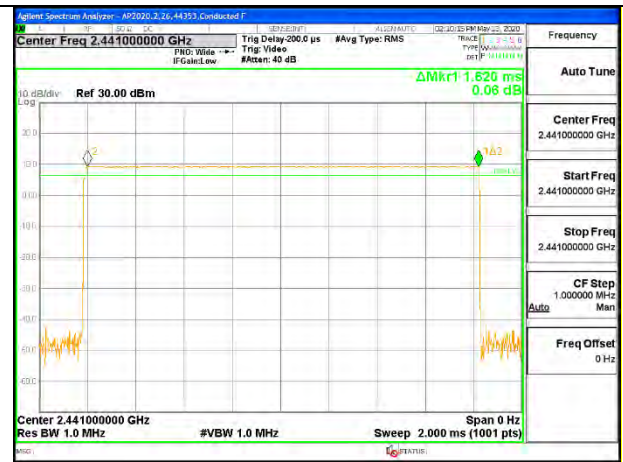

PULSE WIDTH - DH3



PULSE WIDTH - DH5



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD - DH1**



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD - DH3**



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD - DH5**

9.6. OUTPUT POWER

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

TEST PROCEDURE

Measurements was perform using a power meter with wideband peak power sensor.

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power due to the device supporting Beamforming. The directional gains are as follows:

Band (GHz)	ANT 4 Antenna Gain (dBi)	ANT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.4	-2.30	-0.60	-1.37	1.60

RESULTS

9.6.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

ANT 4

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.44	21	-0.56
Middle	2441	20.56	21	-0.44
High	2480	20.35	21	-0.65

ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.39	21	-0.61
Middle	2441	20.45	21	-0.55
High	2480	20.21	21	-0.79

9.6.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.28	17.33	20.32	21	-0.68
Middle	2441	17.34	17.41	20.39	21	-0.61
High	2480	17.3	17.28	20.30	21	-0.70

9.6.3. HIGH POWER ENHANCED DATA RATE QPSK MODULATION

ANT 4

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.23	21	-2.77
Middle	2441	18.28	21	-2.72
High	2480	18.15	21	-2.85

ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.22	21	-2.78
Middle	2441	18.29	21	-2.71
High	2480	18.21	21	-2.79

9.6.4. HIGH POWER ENHANCED DATA RATE TXBF QPSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.23	17.25	20.25	21	-0.75
Middle	2441	17.24	17.27	20.27	21	-0.73
High	2480	17.22	17.20	20.22	21	-0.78

9.6.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.29	21	-2.71
Middle	2441	18.34	21	-2.66
High	2480	18.19	21	-2.81

ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.27	21	-2.73
Middle	2441	18.32	21	-2.68
High	2480	18.24	21	-2.76

9.6.6. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.24	17.26	20.26	21	-0.74
Middle	2441	17.26	17.30	20.29	21	-0.71
High	2480	17.22	17.21	20.23	21	-0.77

9.6.7. LOW POWER BASIC DATA RATE GFSK MODULATION

ANT 4

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.76	21	-8.24
Middle	2441	12.91	21	-8.09
High	2480	12.64	21	-8.36

ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.68	21	-8.32
Middle	2441	12.84	21	-8.16
High	2480	12.59	21	-8.41

9.6.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.71	12.84	15.79	21	-5.21
Middle	2441	12.79	12.85	15.83	21	-5.17
High	2480	12.65	12.68	15.68	21	-5.32

9.6.9. LOW POWER ENHANCED DATA RATE QPSK MODULATION

ANT 4

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.20	21	-9.8
Middle	2441	11.23	21	-9.77
High	2480	11.19	21	-9.81

ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.28	21	-9.72
Middle	2441	11.29	21	-9.71
High	2480	11.24	21	-9.76

9.6.10. LOW POWER ENHANCED DATA RATE TXBF QPSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.25	11.33	14.30	21	-6.70
Middle	2441	11.27	11.32	14.31	21	-6.69
High	2480	11.23	11.29	14.27	21	-6.73

9.6.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.27	21	-9.73
Middle	2441	11.29	21	-9.71
High	2480	11.24	21	-9.76

ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.32	21	-9.68
Middle	2441	11.33	21	-9.67
High	2480	11.27	21	-9.73

9.6.12. LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.28	11.35	14.33	21	-6.67
Middle	2441	11.30	11.36	14.34	21	-6.66
High	2480	11.25	11.32	14.30	21	-6.70

9.7. AVERAGE POWER

LIMITS

None; for reporting purposes only

TEST PROCEDURE

Measurements was performed using a power meter with wideband average power sensor.

RESULTS

9.7.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

ANT 4

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.97
Middle	2441	19.99
High	2480	19.92

ANT 3

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.95
Middle	2441	19.97
High	2480	19.93

9.7.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	16.93	16.94	19.95
Middle	2441	16.97	16.99	19.99
High	2480	16.90	16.88	19.90

9.7.3. HIGH POWER ENHANCED DATA RATE QPSK MODULATION

ANT 4

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	15.90
Middle	2441	15.96
High	2480	15.80

ANT 3

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	15.92
Middle	2441	15.97
High	2480	15.87

9.7.4. HIGH POWER BASIC DATA RATE TXBF QPSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	14.89	14.92	17.92
Middle	2441	14.95	14.96	17.97
High	2480	14.86	14.86	17.87

9.7.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	15.95
Middle	2441	15.96
High	2480	15.89

ANT 3

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	15.94
Middle	2441	15.98
High	2480	15.92

9.7.6. HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	14.91	14.93	17.93
Middle	2441	14.96	14.98	17.98
High	2480	14.87	14.88	17.89

9.7.7. LOW POWER BASIC DATA RATE GFSK MODULATION

ANT 4

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	12.43
Middle	2441	12.48
High	2480	12.41

ANT 3

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	12.41
Middle	2441	12.46
High	2480	12.38

9.7.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	12.44	12.43	15.45
Middle	2441	12.49	12.49	15.50
High	2480	12.41	12.38	15.41

9.7.9. LOW POWER ENHANCED DATA RATE QPSK MODULATION

ANT 4

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.89
Middle	2441	8.93
High	2480	8.88

ANT 3

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.91
Middle	2441	8.94
High	2480	8.87

9.7.10. LOW POWER BASIC DATA RATE TXBF QPSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	8.92	8.93	11.94
Middle	2441	8.95	8.95	11.96
High	2480	8.89	8.87	11.89

9.7.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.95
Middle	2441	8.97
High	2480	8.91

ANT 3

Tested By:	19431
Date	9/6/2020

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.93
Middle	2441	8.95
High	2480	8.92

9.7.12. LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION

ANT 4 + ANT 3

Tested By:	19431
Date:	9/6/2020

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	8.92	8.94	11.94
Middle	2441	8.97	8.96	11.98
High	2480	8.90	8.88	11.90

9.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 5.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS

9.8.1. HIGH POWER BASIC DATA RATE GFSK MODULATION


ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

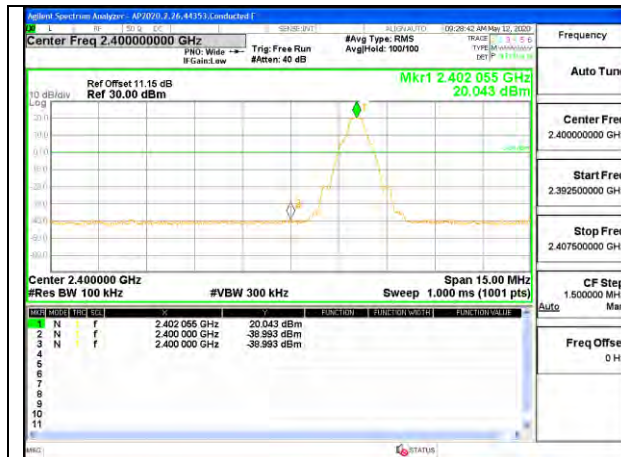

LOW CHANNEL BANDEDGE

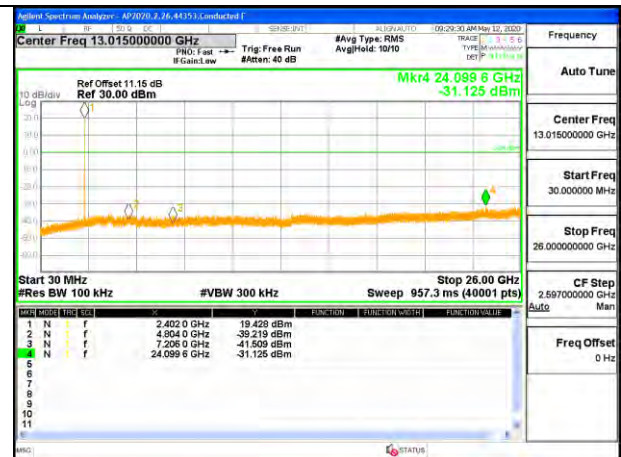


OUT-OF-BAND LOW CHANNEL

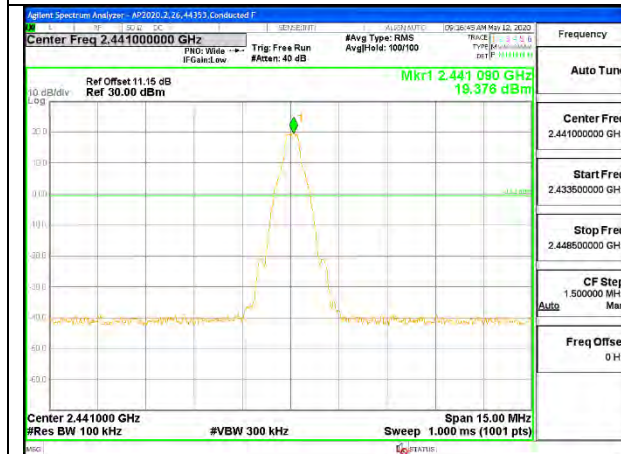


MID CHANNEL REFERENCE LEVEL



OUT-OF-BAND MID CHANNEL

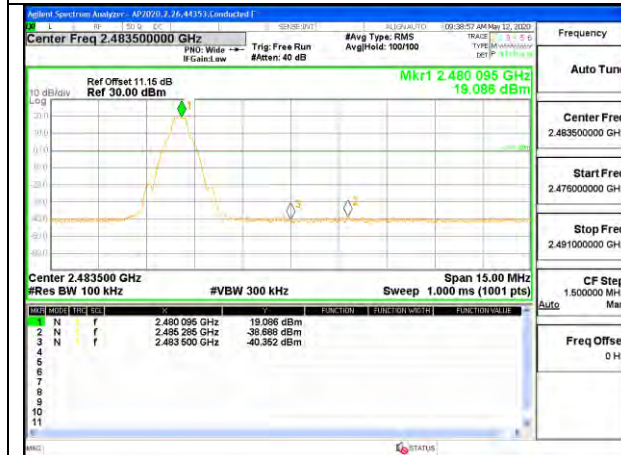


HIGH CHANNEL BANDEDGE

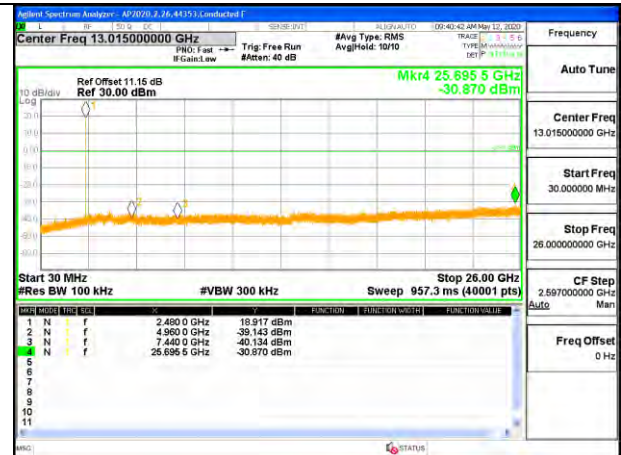

OUT-OF-BAND HIGH CHANNEL


ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

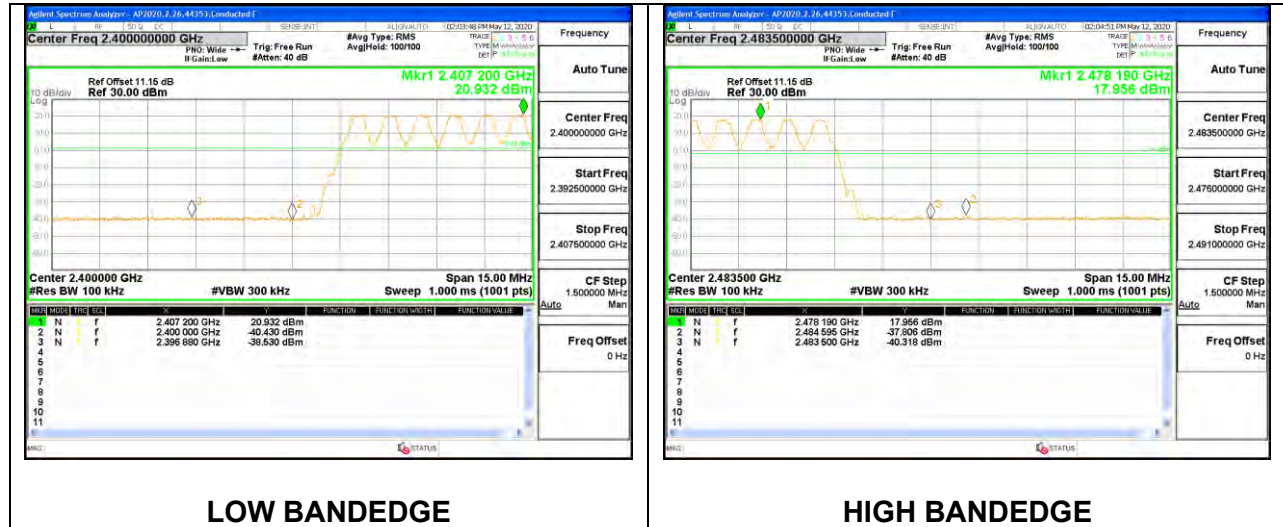


ANT 3 SPURIOUS EMISSIONS, NON-HOPPING



LOW CHANNEL BANDEDGE

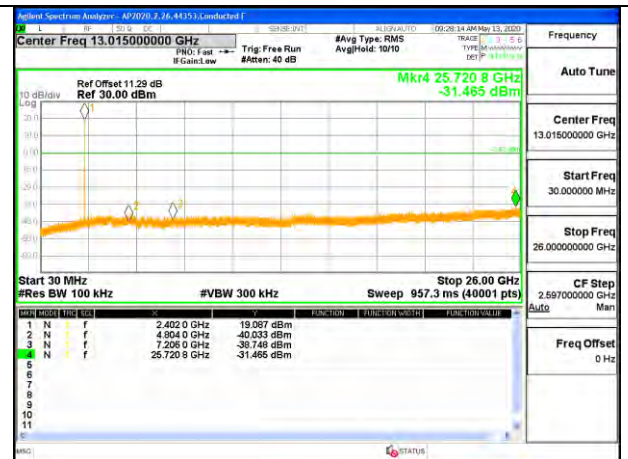


OUT-OF-BAND LOW CHANNEL

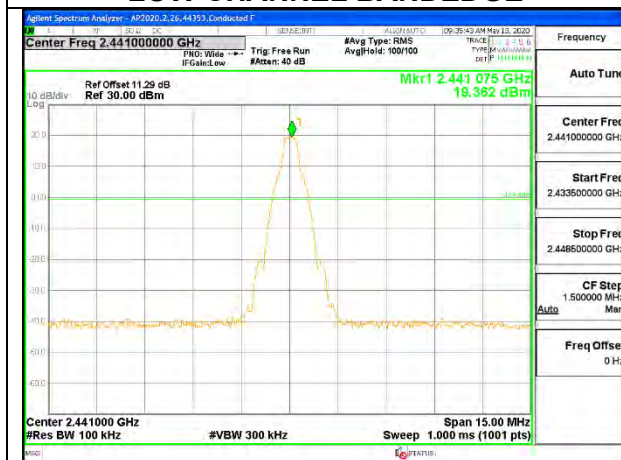

MID CHANNEL REFERENCE LEVEL



OUT-OF-BAND MID CHANNEL

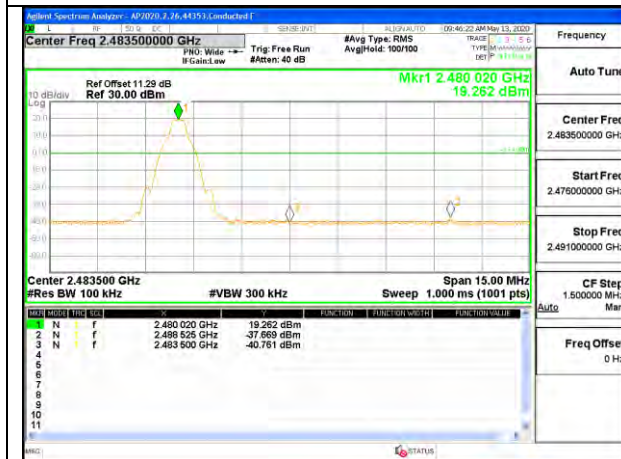


HIGH CHANNEL BANDEDGE



OUT-OF-BAND HIGH CHANNEL


ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

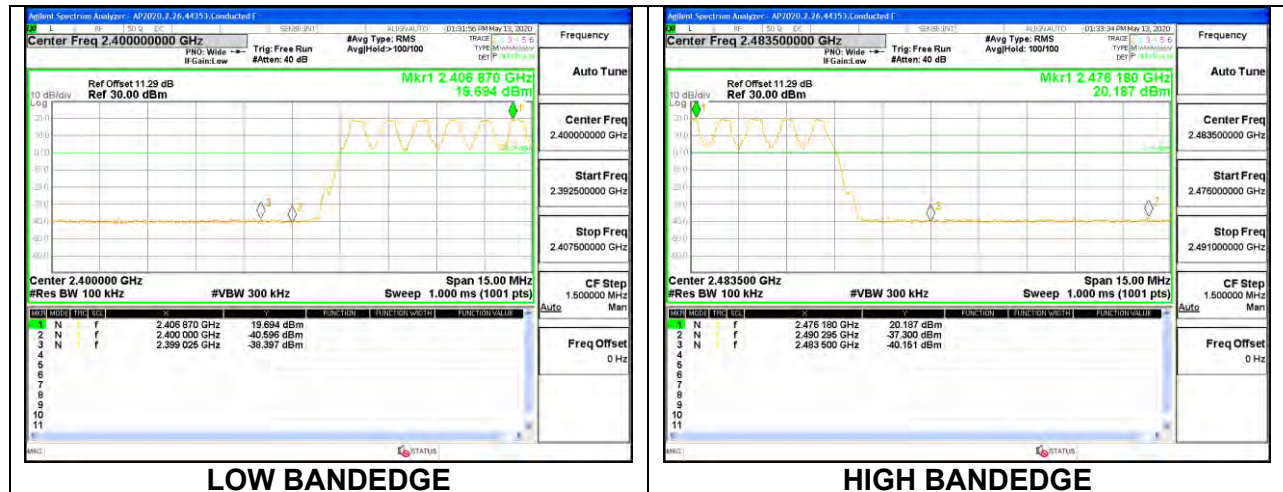


9.8.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION

Note: Test procedure on beamforming mode is same as BT basic and EDR mode


ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

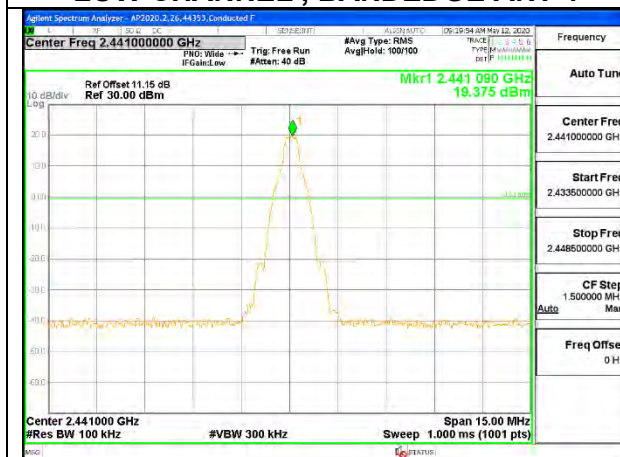


ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

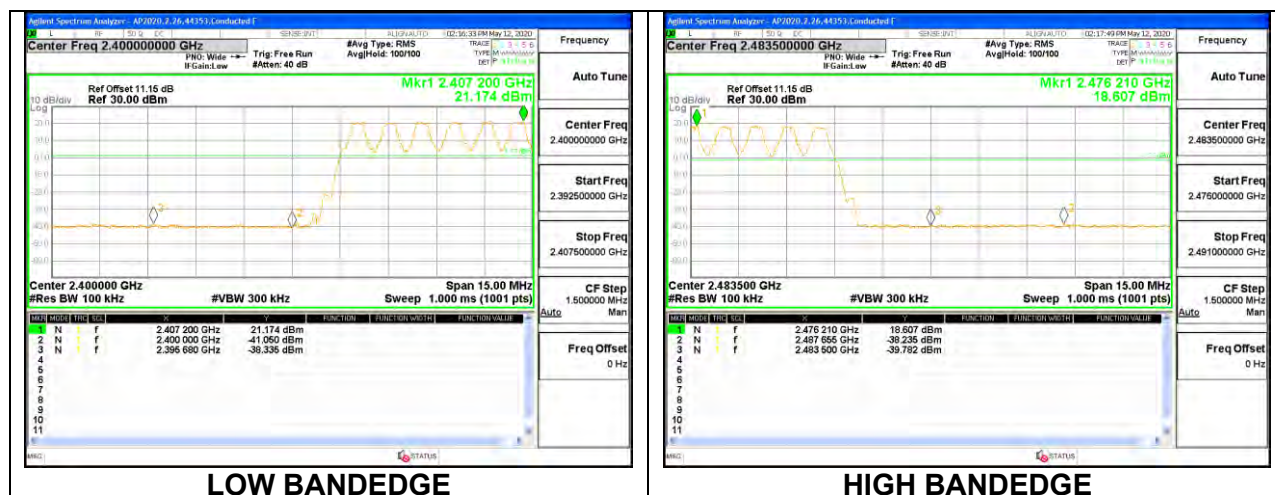


ANT 3 SPURIOUS EMISSIONS, NON-HOPPING

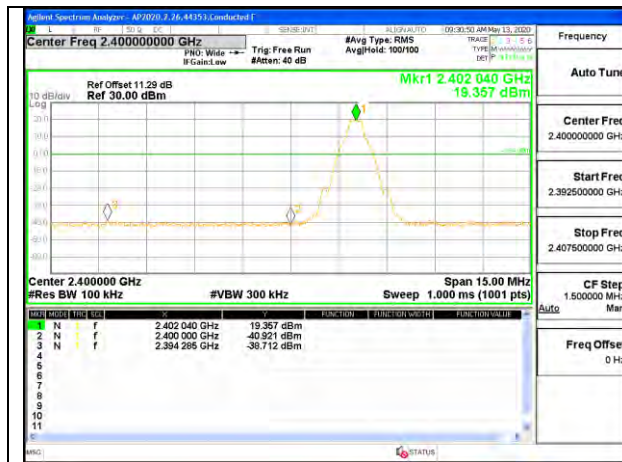

LOW CHANNEL , BANDEDGE ANT 3

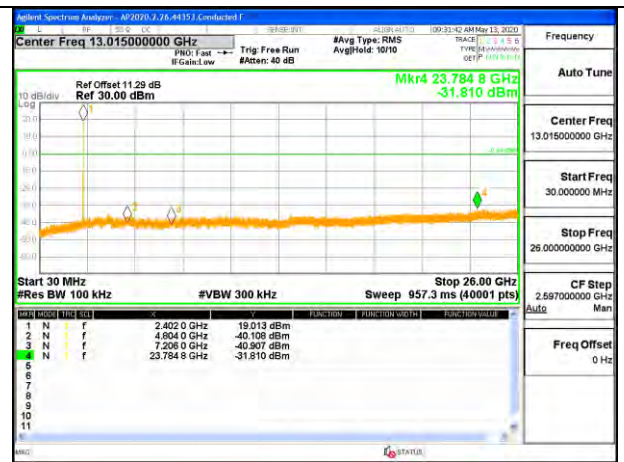

LOW CHANNEL OUT-OF-BAND ANT 3

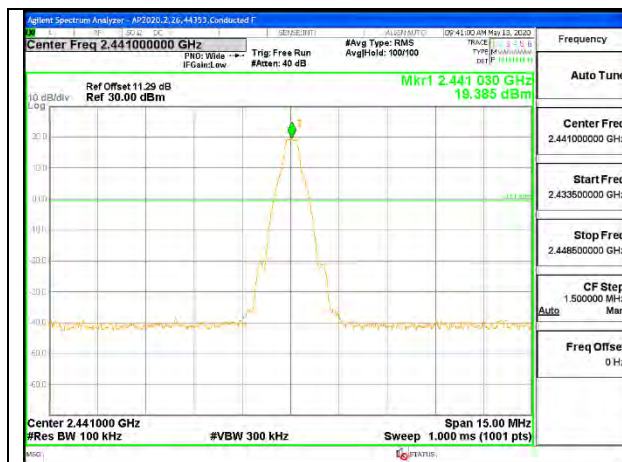

MID CHANNEL REFERENCE ANT 3



MID CHANNEL OUT-OF-BAND ANT 3




HIGH CHANNEL BANDEDGE ANT 3



HIGH CHANNEL OUT-OF-BAND ANT 3

ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

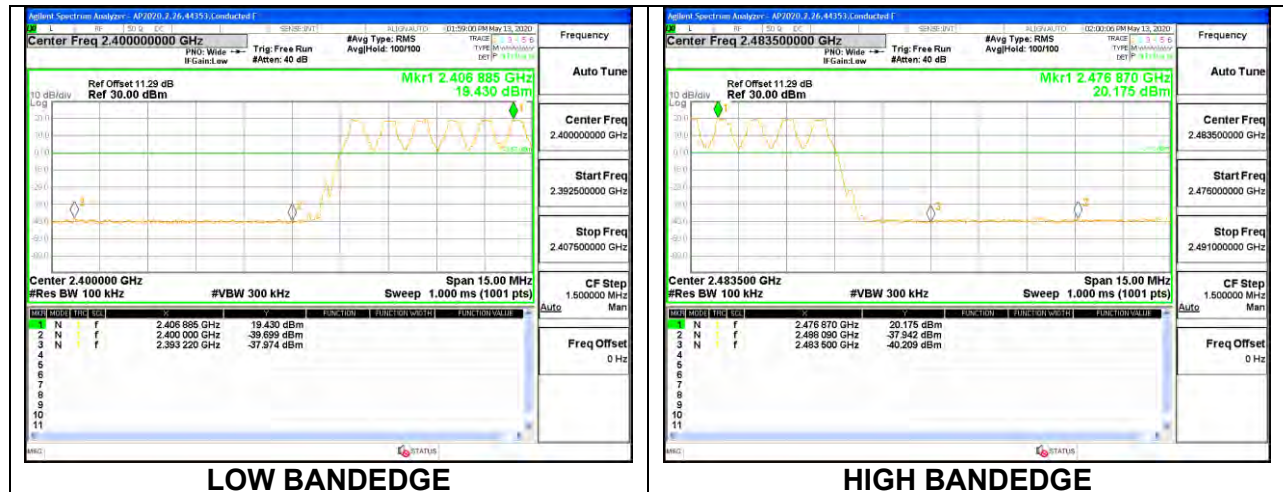


9.8.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION


ANT 4 SPURIOUS EMISSIONS, NON-HOPPING




LOW CHANNEL BANDEDGE

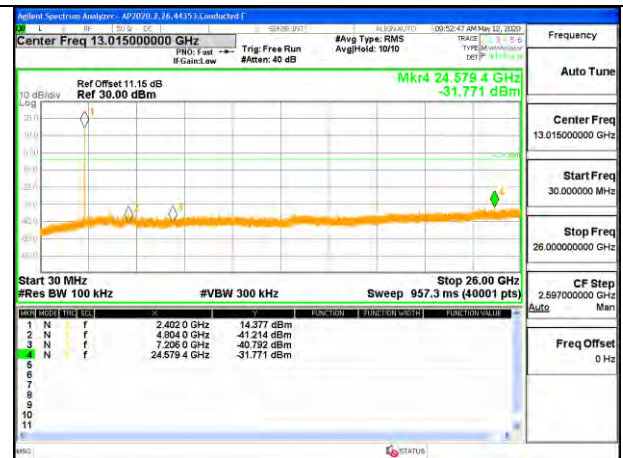


OUT-OF-BAND LOW CHANNEL

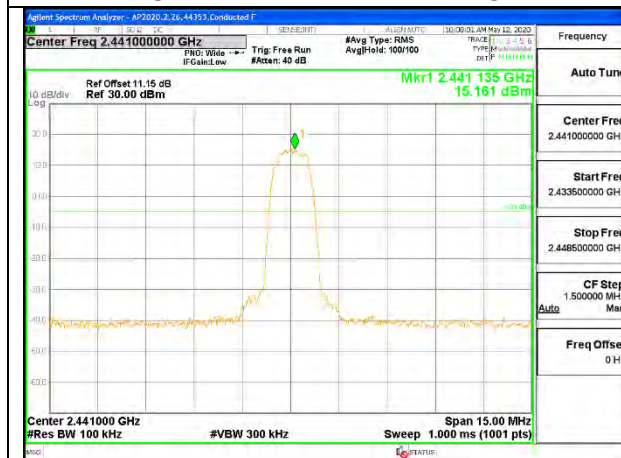


MID CHANNEL REFERENCE LEVEL

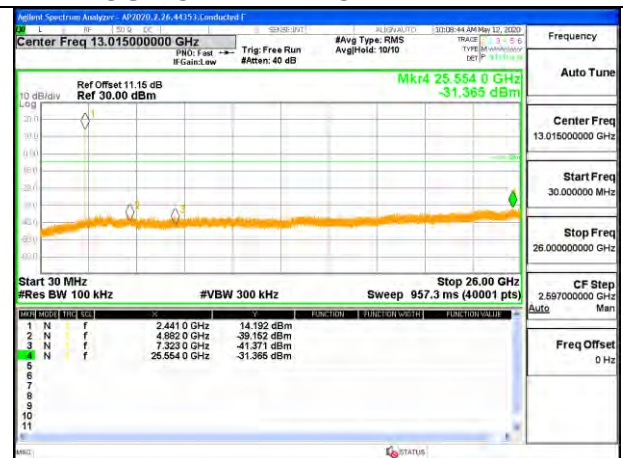

OUT-OF-BAND MID CHANNEL

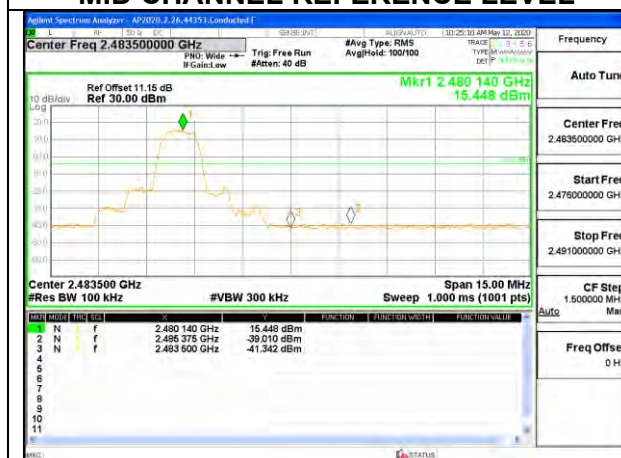


HIGH CHANNEL BANDEDGE

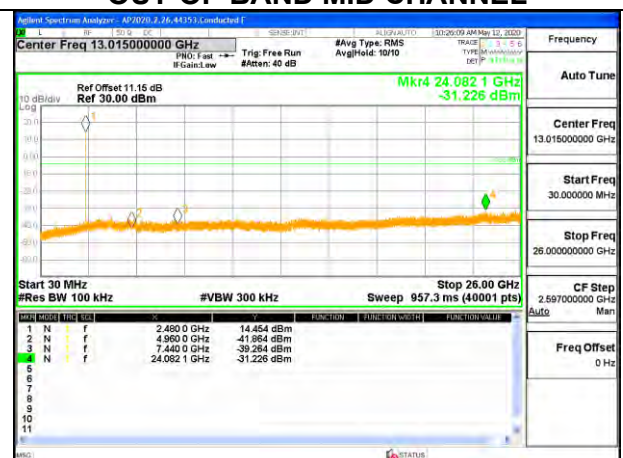

OUT-OF-BAND HIGH CHANNEL

ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

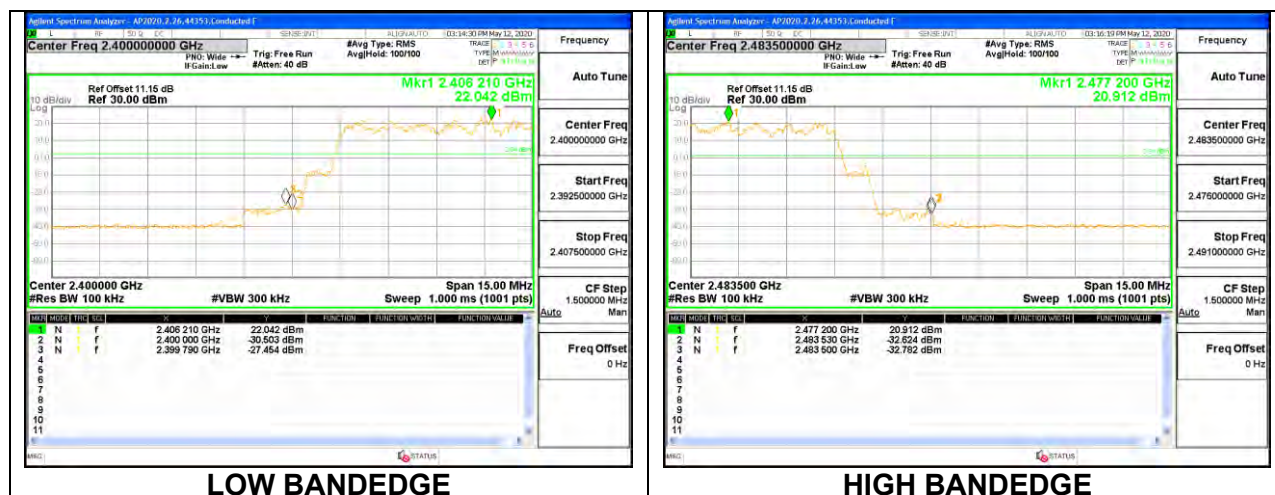


ANT 3 SPURIOUS EMISSIONS, NON-HOPPING



LOW CHANNEL BANDEDGE




OUT-OF-BAND LOW CHANNEL

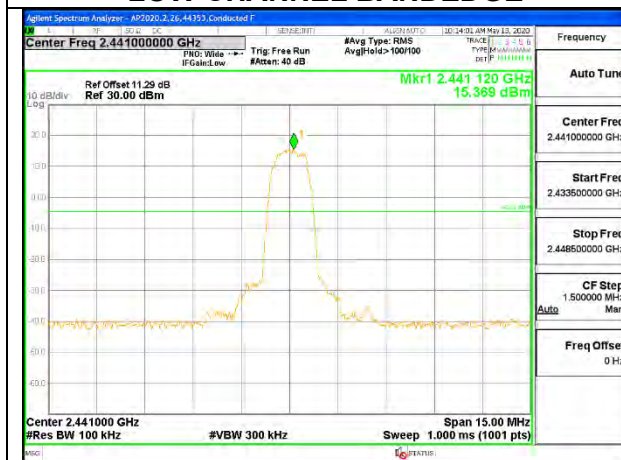


MID CHANNEL REFERENCE LEVEL



OUT-OF-BAND MID CHANNEL

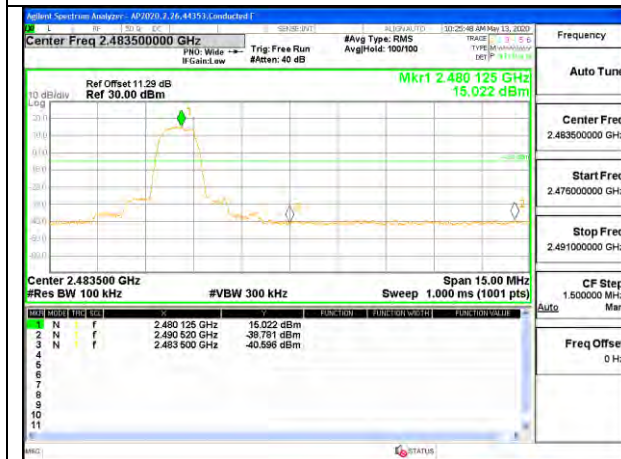


HIGH CHANNEL BANDEDGE

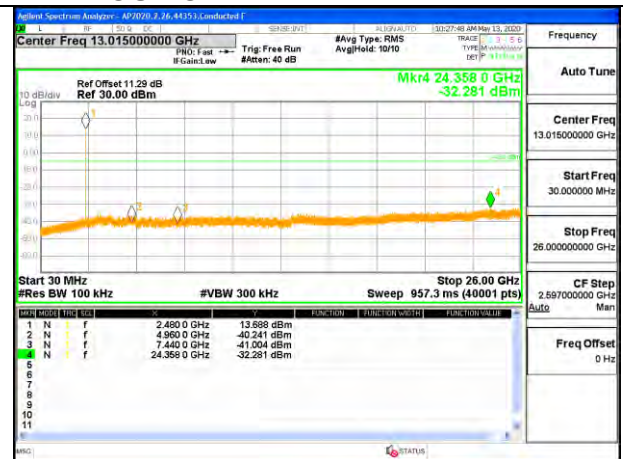

OUT-OF-BAND HIGH CHANNEL



ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

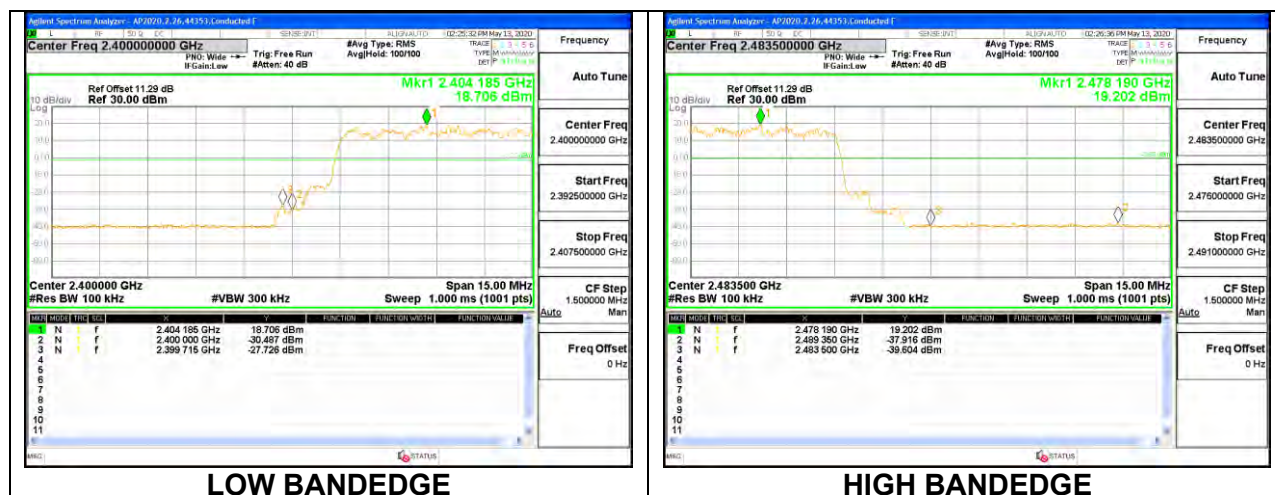

9.8.4. HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION

Note: Test procedure on beamforming mode is same as BT basic and EDR mode







ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

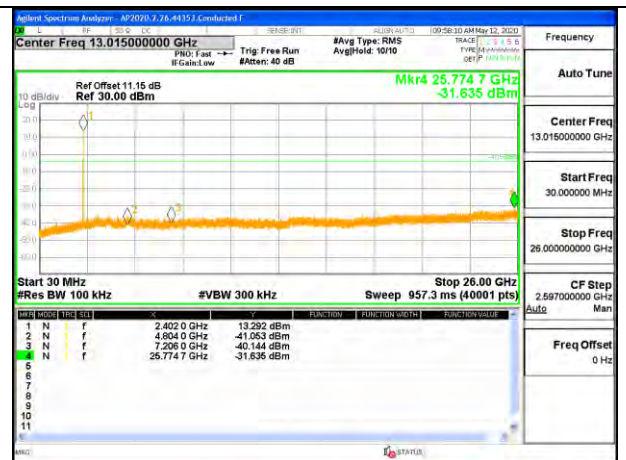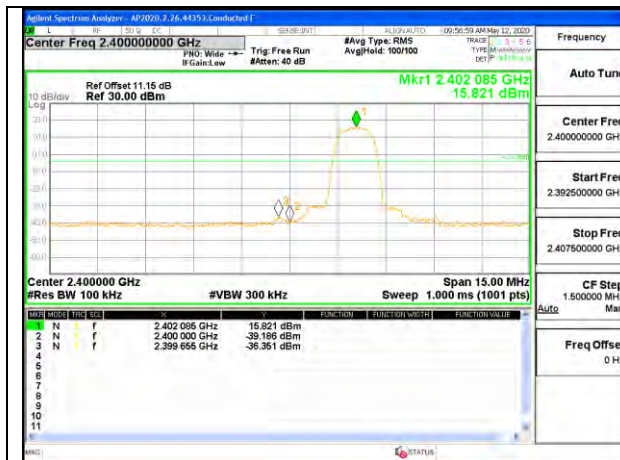


ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON



ANT 3 SPURIOUS EMISSIONS, NON-HOPPING

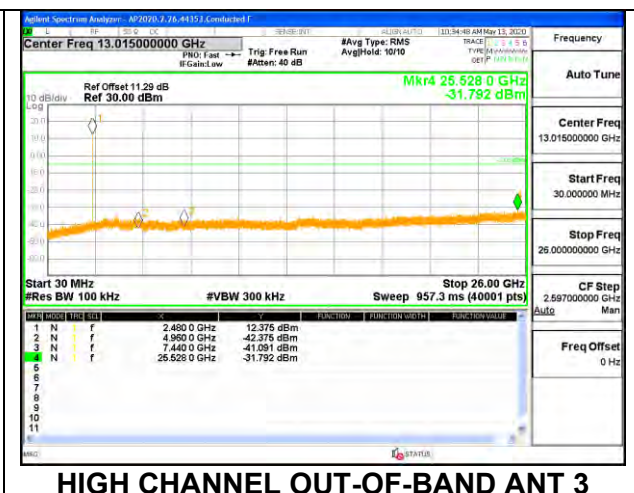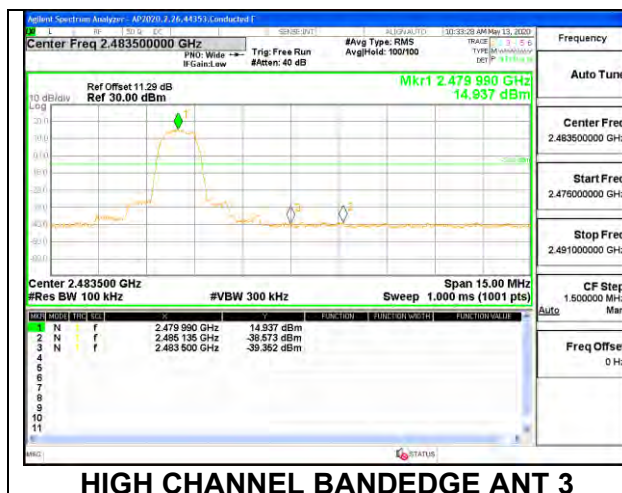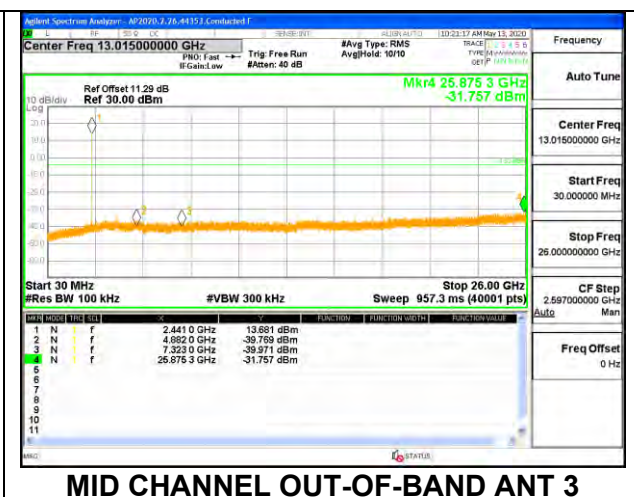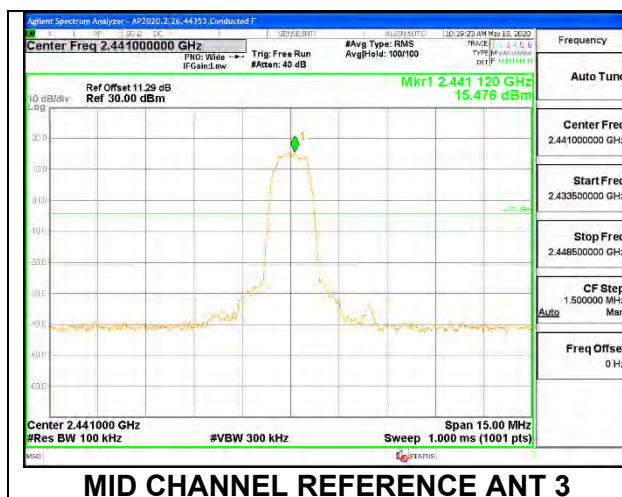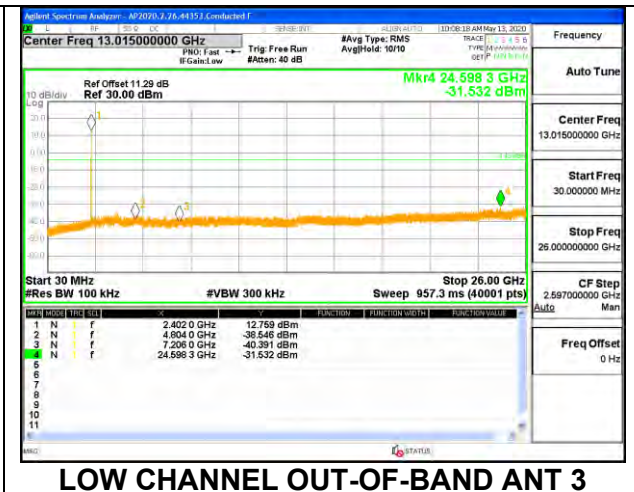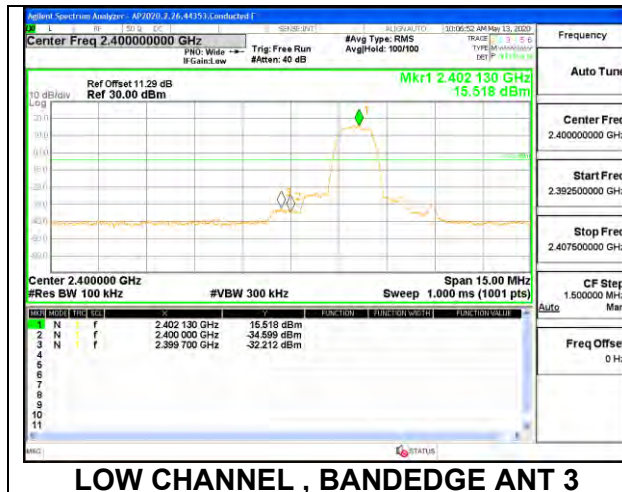


ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

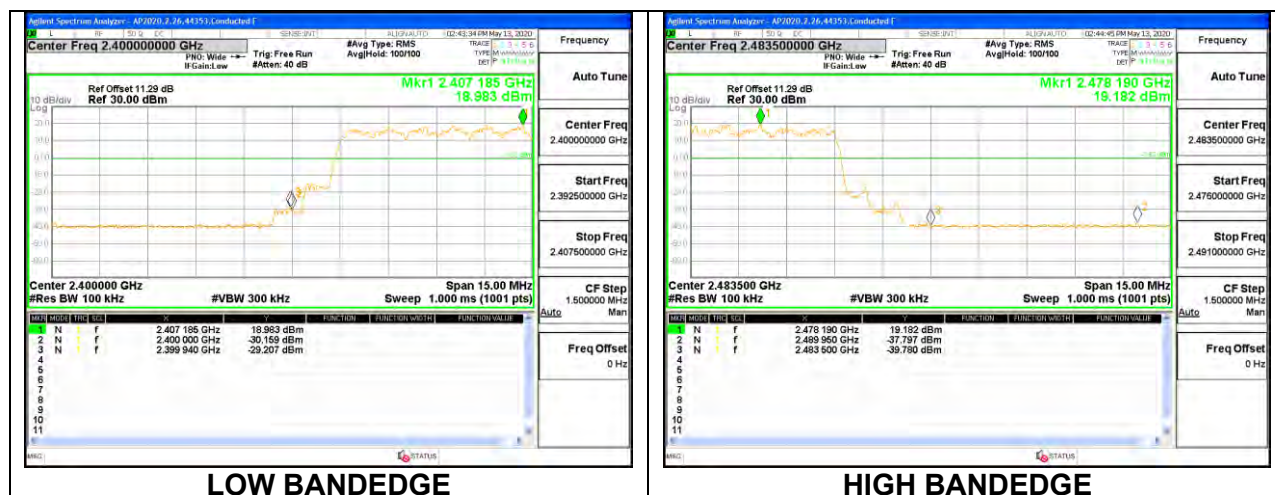

9.8.5. LOW POWER BASIC DATA RATE GFSK MODULATION

ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

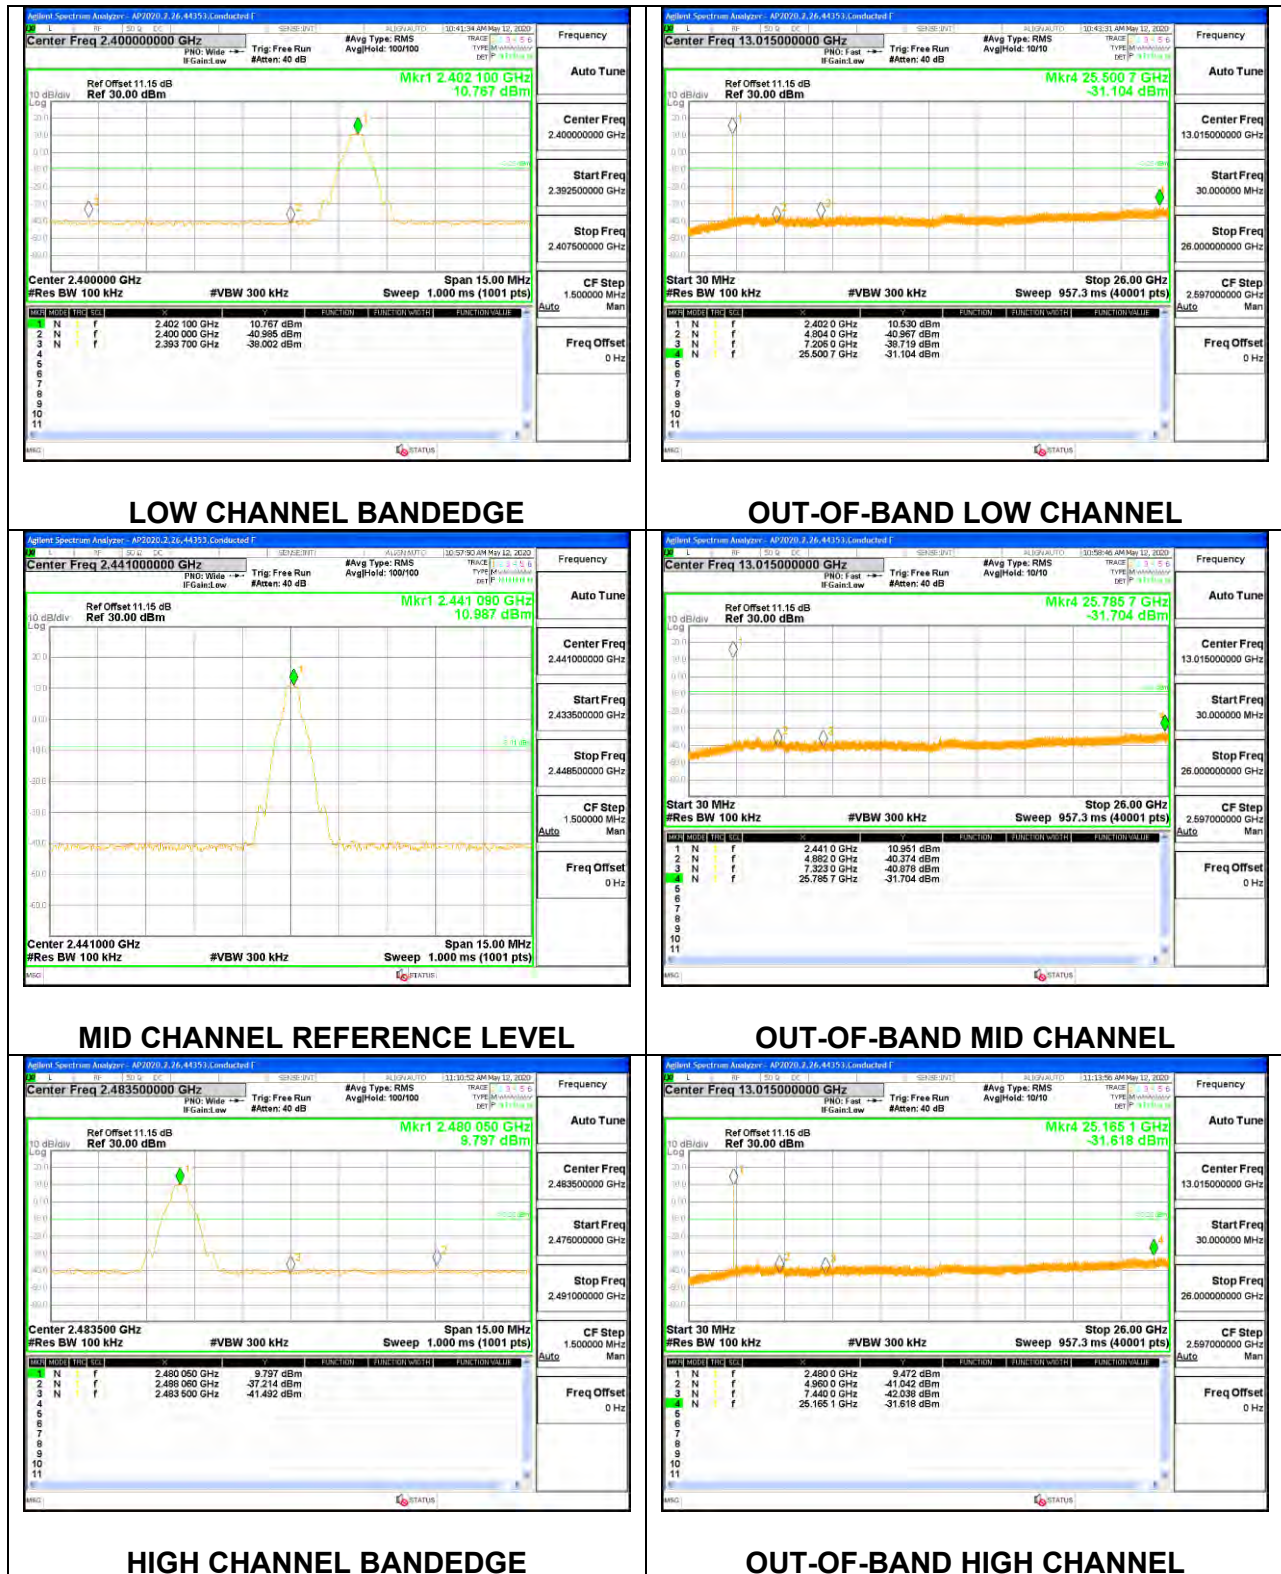


ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON




ANT 3 SPURIOUS EMISSIONS, NON-HOPPING



LOW CHANNEL BANDEDGE

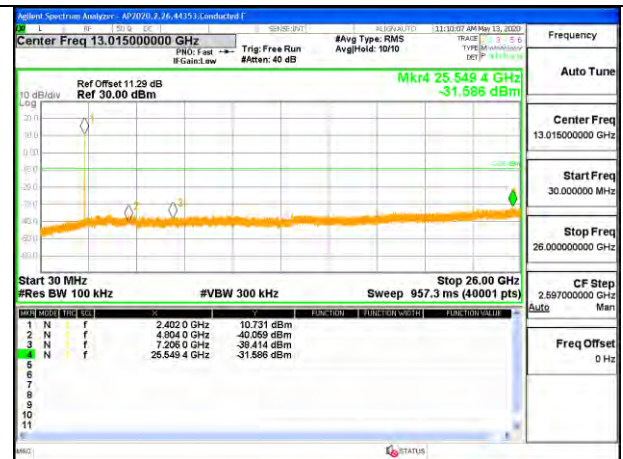

OUT-OF-BAND LOW CHANNEL

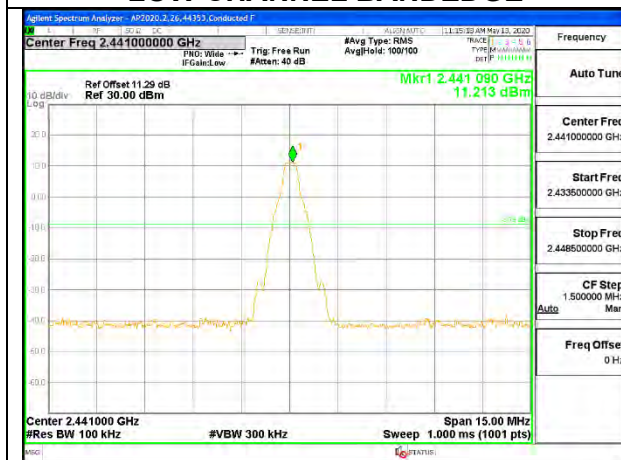

MID CHANNEL REFERENCE LEVEL



OUT-OF-BAND MID CHANNEL




HIGH CHANNEL BANDEDGE



OUT-OF-BAND HIGH CHANNEL


ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

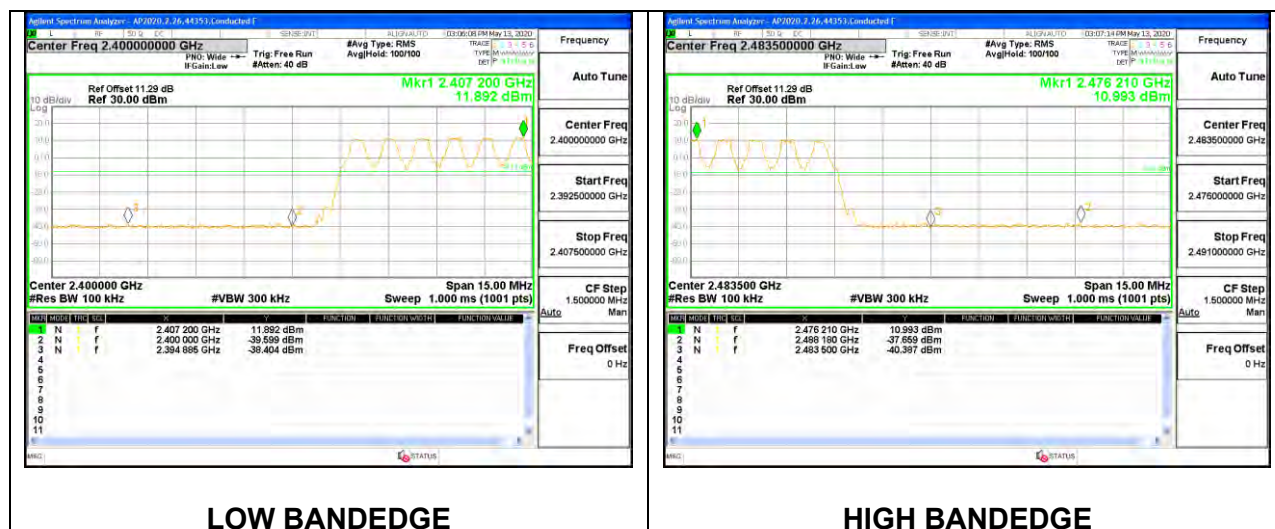

9.8.6. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION

Note: Test procedure on beamforming mode is same as BT basic and EDR mode


ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

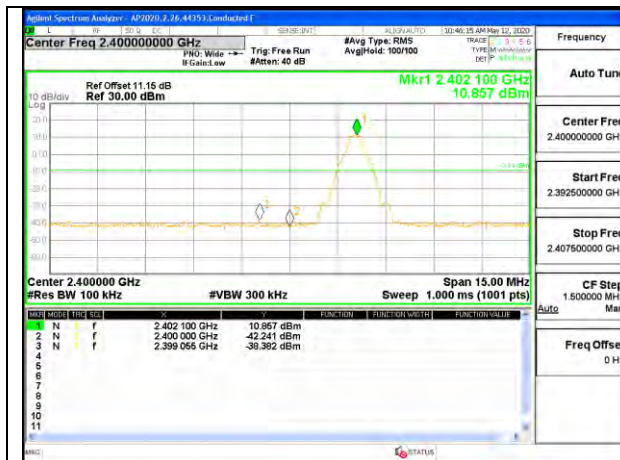

LOW CHANNEL, BANDEDGE ANT 4



LOW CHANNEL OUT-OF-BAND ANT 4

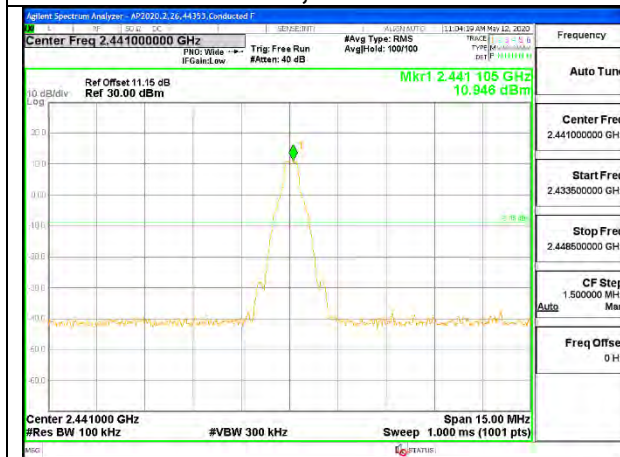

MID CHANNEL REFERENCE ANT 4



MID CHANNEL OUT-OF-BAND ANT 4



HIGH CHANNEL BANDEDGE ANT 4




HIGH CHANNEL OUT-OF-BAND ANT 4


ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON




ANT 3 SPURIOUS EMISSIONS, NON-HOPPING

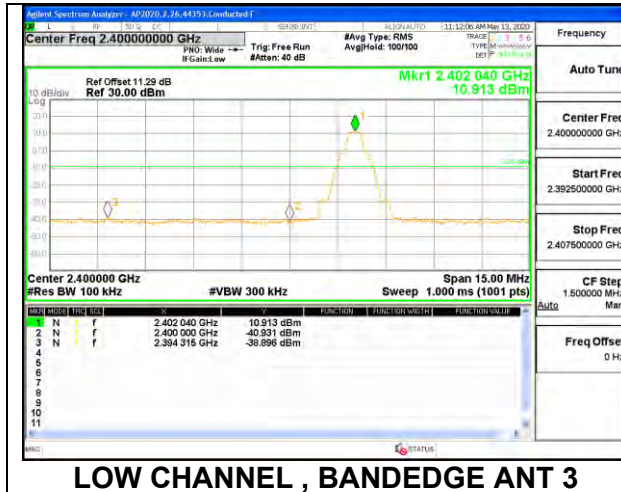


LOW CHANNEL , BANDEDGE ANT 3

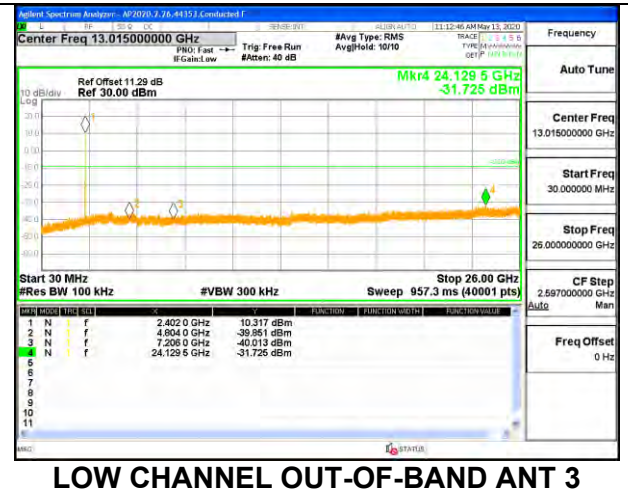


LOW CHANNEL OUT-OF-BAND ANT 3

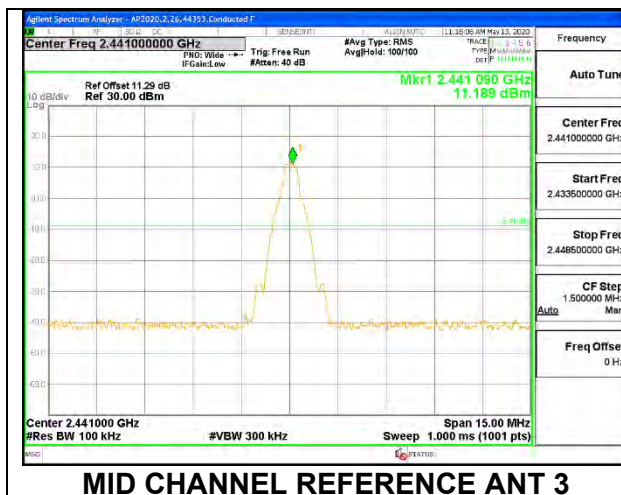


MID CHANNEL REFERENCE ANT 3

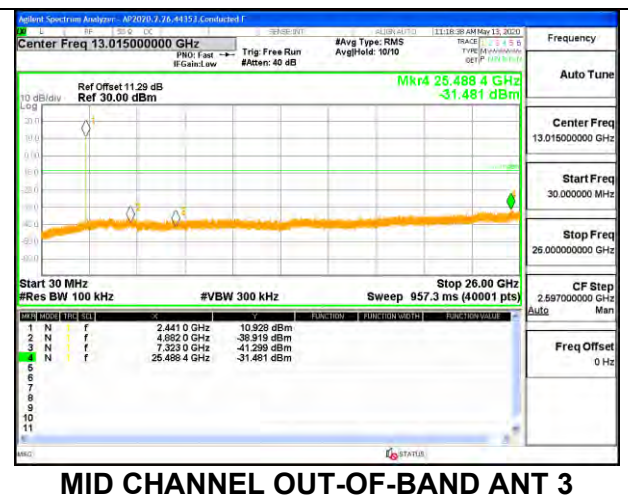

MID CHANNEL OUT-OF-BAND ANT 3

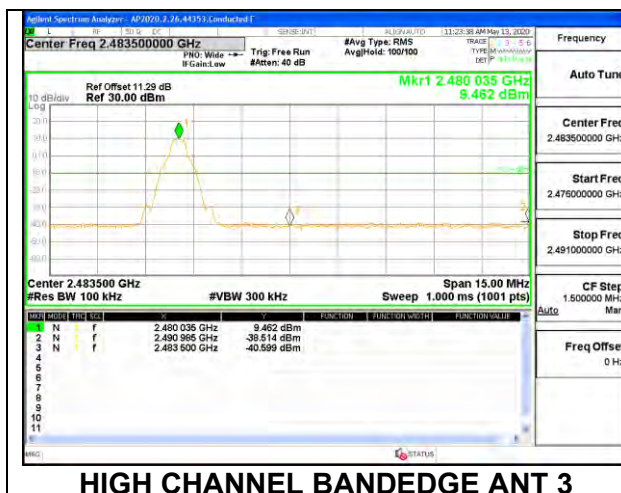

HIGH CHANNEL BANDEDGE ANT 3

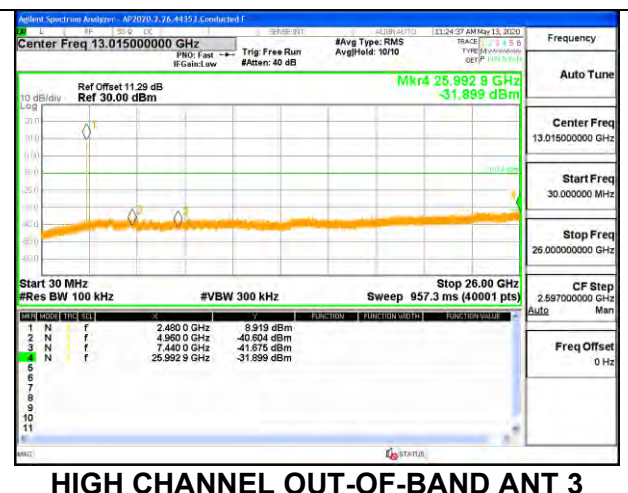

HIGH CHANNEL OUT-OF-BAND ANT 3

ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON




9.8.7. LOW POWER ENHANCED DATA RATE 8PSK MODULATION


ANT 4 SPURIOUS EMISSIONS, NON-HOPPING




LOW CHANNEL BANDEDGE

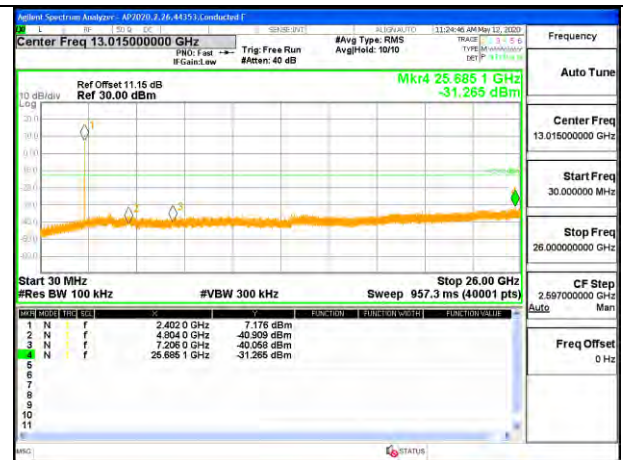

OUT-OF-BAND LOW CHANNEL

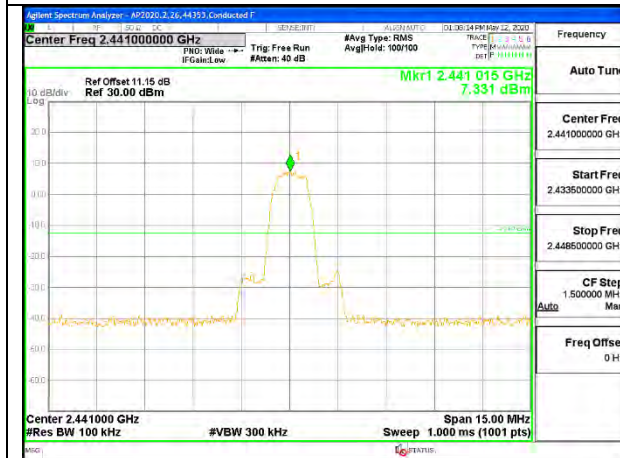

MID CHANNEL REFERENCE LEVEL

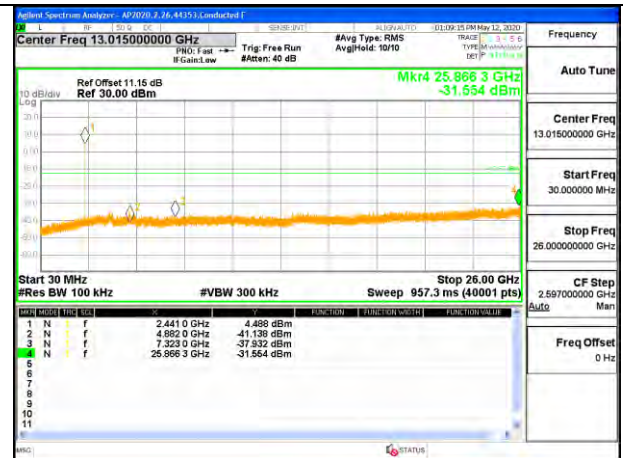

OUT-OF-BAND MID CHANNEL




HIGH CHANNEL BANDEDGE



OUT-OF-BAND HIGH CHANNEL


ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

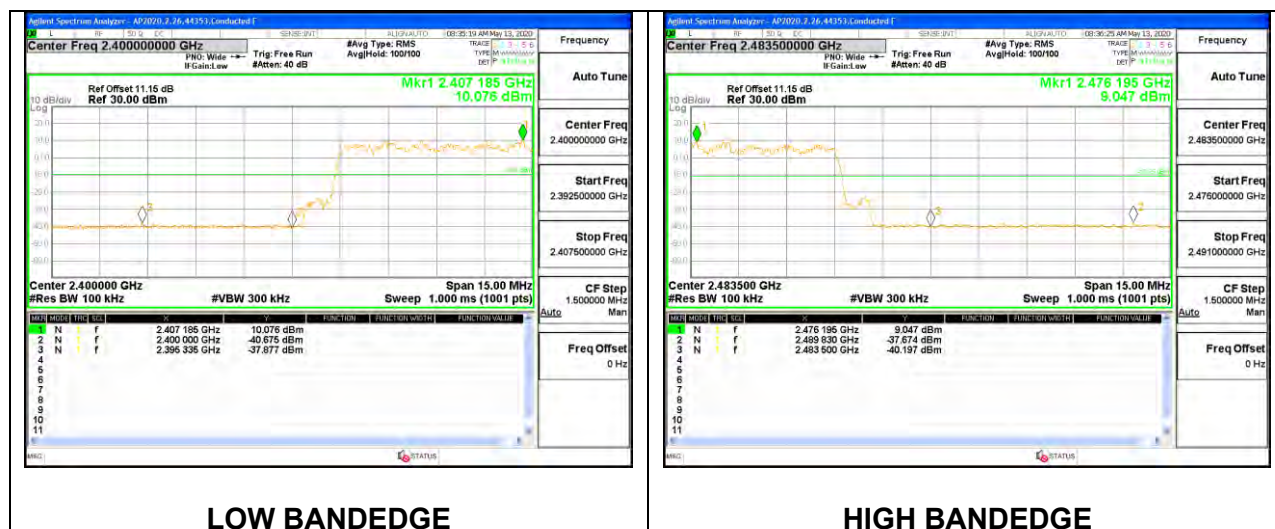

ANT 3 SPURIOUS EMISSIONS, NON-HOPPING




LOW CHANNEL BANDEDGE

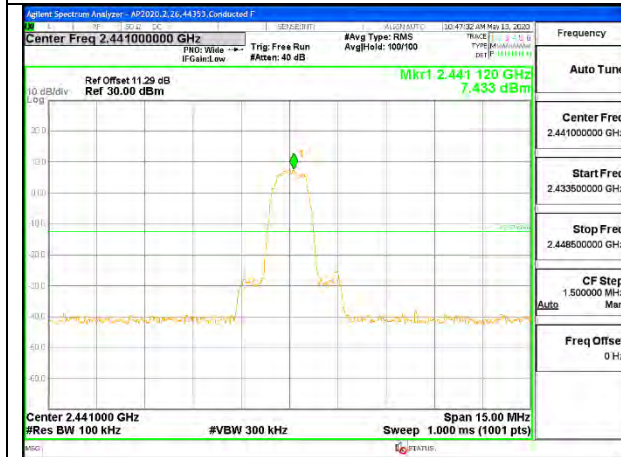


MID CHANNEL REFERENCE LEVEL




HIGH CHANNEL BANDEDGE

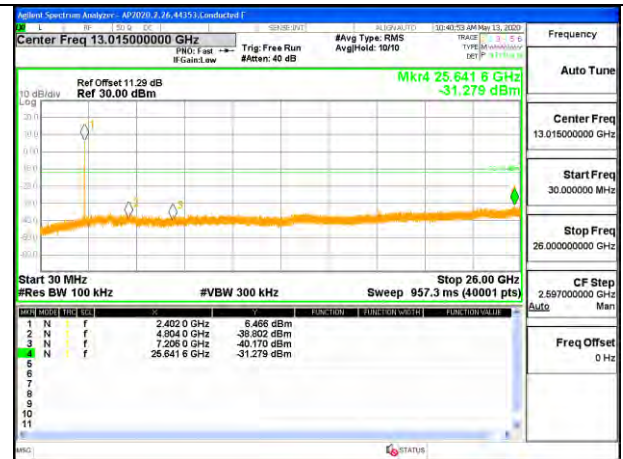

OUT-OF-BAND LOW CHANNEL

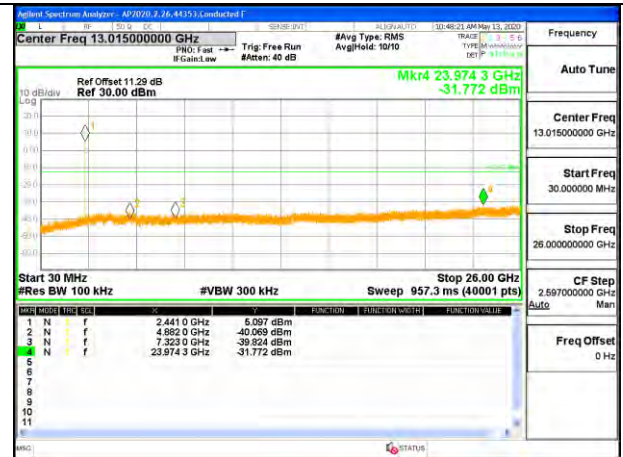


OUT-OF-BAND MID CHANNEL

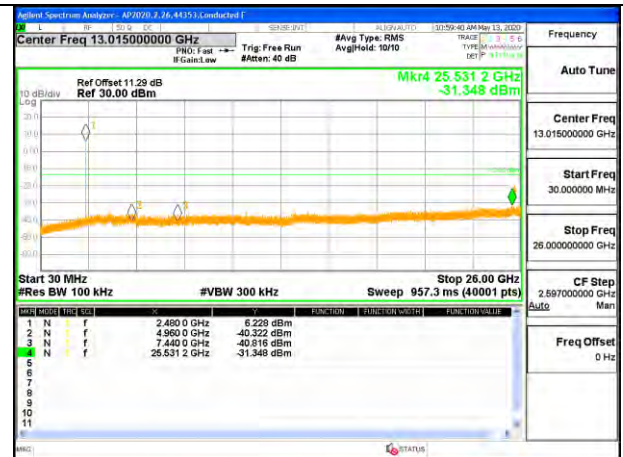

OUT-OF-BAND HIGH CHANNEL


ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

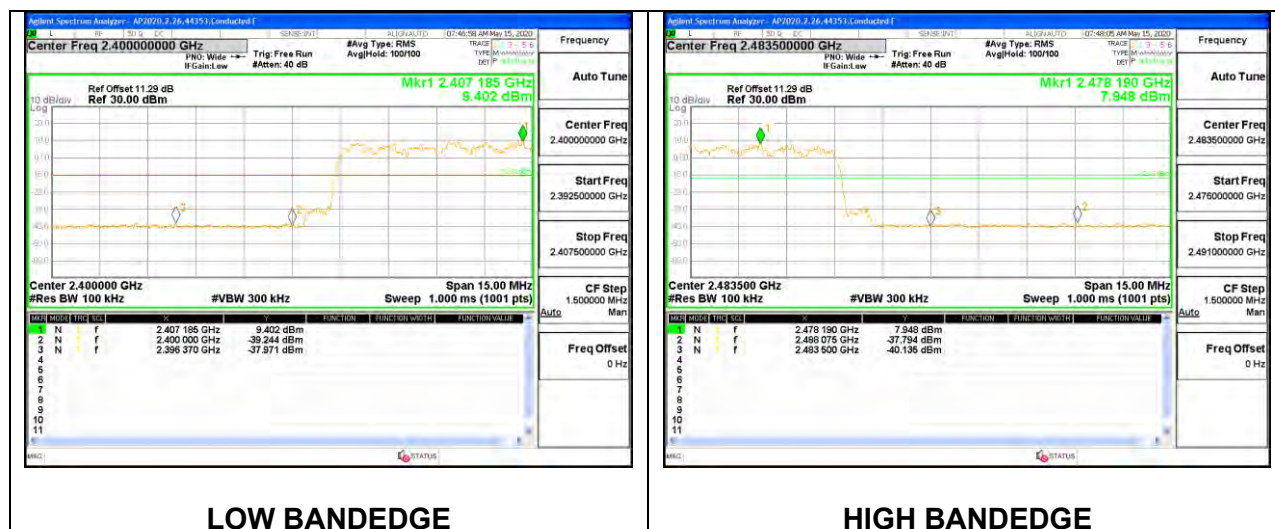

9.8.8. LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION

Note: Test procedure on beamforming mode is same as BT basic and EDR mode

ANT 4

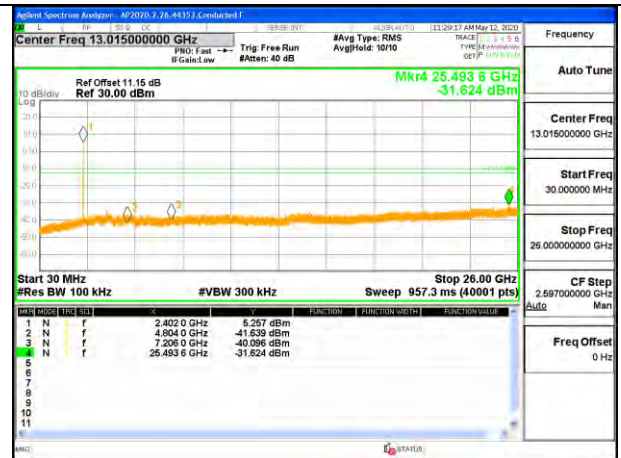

ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON



ANT 3



LOW CHANNEL , BANDEDGE ANT 3



LOW CHANNEL OUT-OF-BAND ANT 3



MID CHANNEL REFERENCE ANT 3



MID CHANNEL OUT-OF-BAND ANT 3



HIGH CHANNEL BANDEDGE ANT 3



HIGH CHANNEL OUT-OF-BAND ANT 3

ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

