


BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

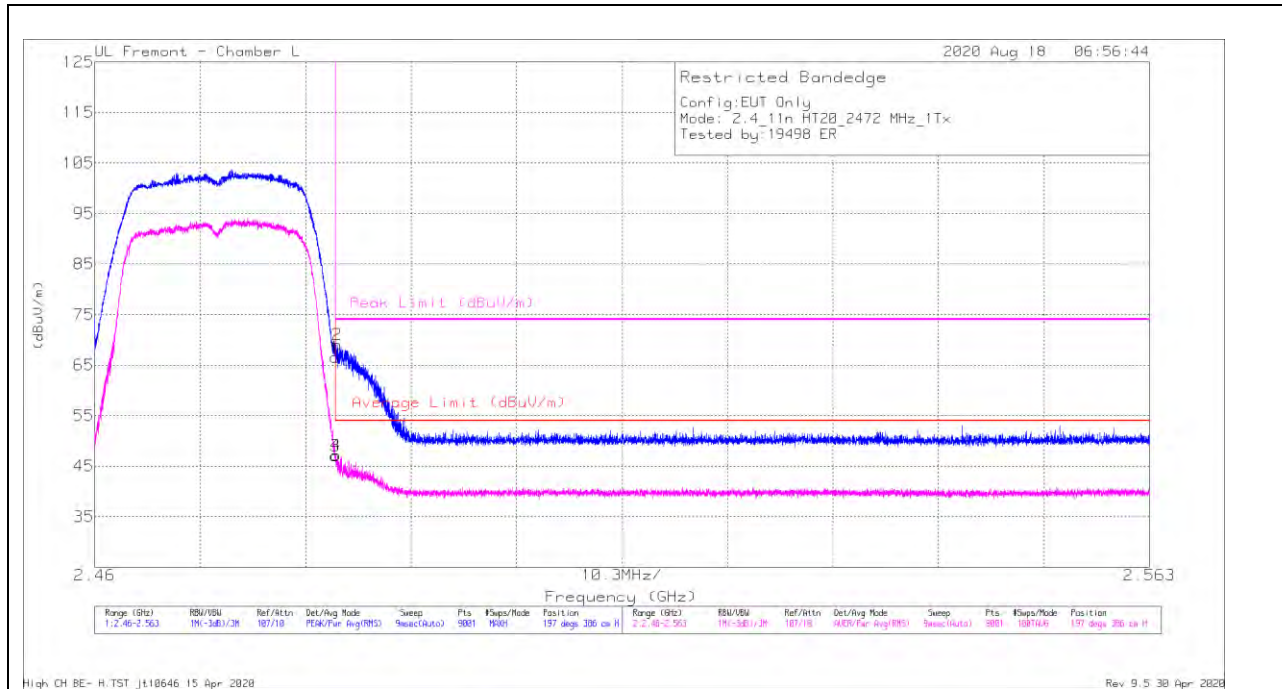

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	55.11	PK	32.3	-20.9	0	66.51	-	-	74	-7.49	197	386	H
2	*2.48369	57.68	PK	32.3	-20.9	0	69.08	-	-	74	-4.92	197	386	H
3	*2.48351	35.26	RMS	32.3	-20.9	0.39	47.05	54	-6.95	-	-	197	386	H
4	*2.48353	35.41	RMS	32.3	-20.9	0.39	47.2	54	-6.8	-	-	197	386	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

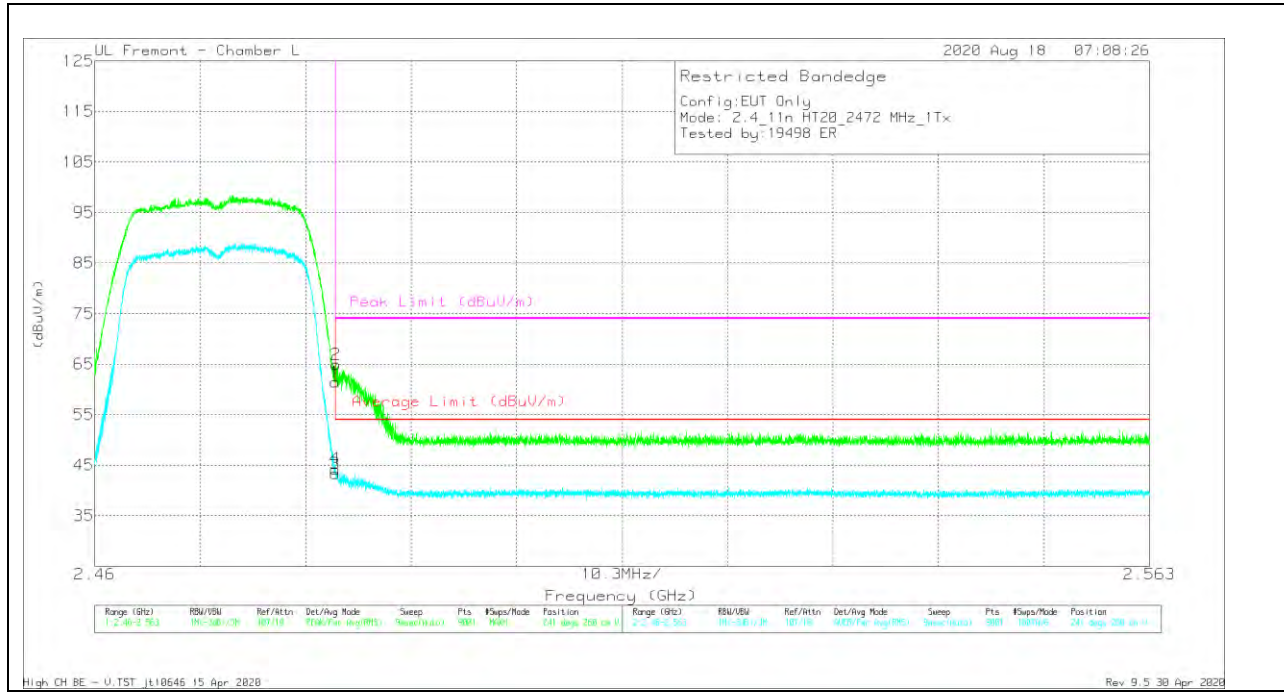


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/CbI/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	50.01	Pk	32.3	-20.9	0	61.41	-	-	74	-12.59	241	260	V
2	*2.48354	53.52	Pk	32.3	-20.9	0	64.92	-	-	74	-9.08	241	260	V
3	*2.48351	31.53	RMS	32.3	-20.9	0.39	43.32	54	-10.68	-	-	241	260	V
4	*2.48352	32.5	RMS	32.3	-20.9	0.39	44.29	54	-9.71	-	-	241	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX ANT 4 + ANT 3 CDD MODE

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

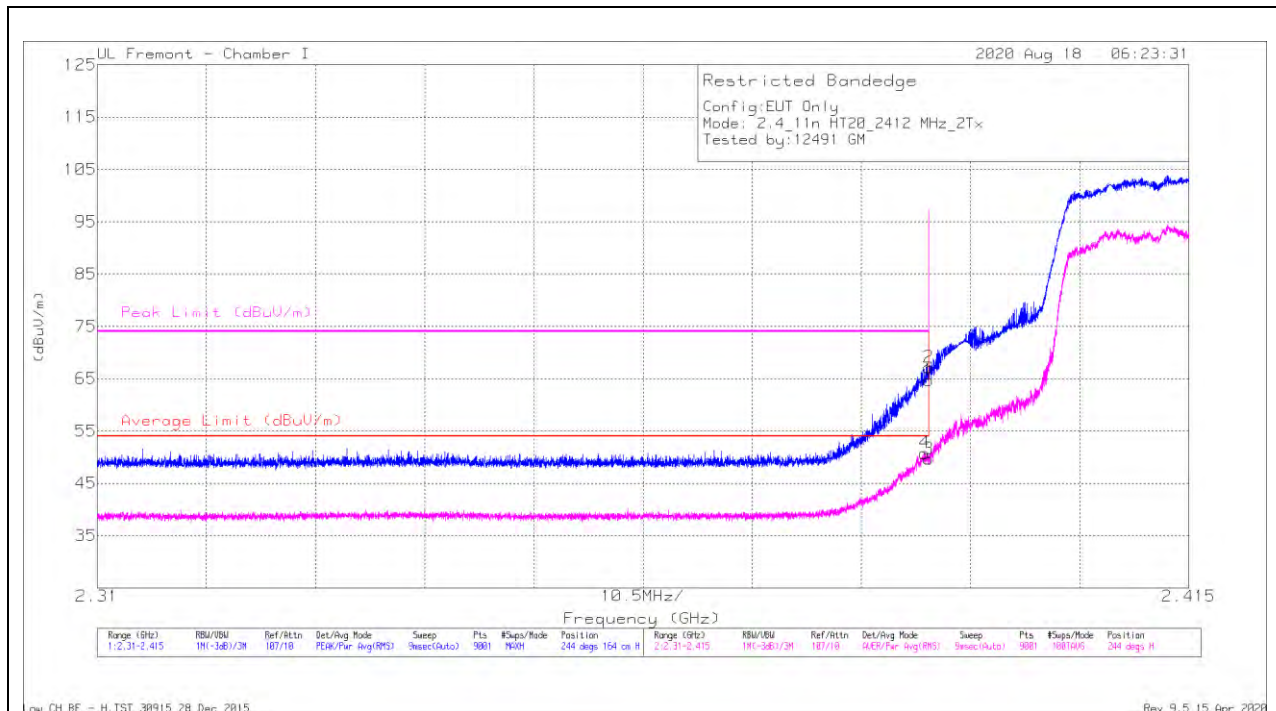

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polariz y
1	*2.38999	49.96	Pk	32	-17.3	0	64.66	-	-	74	-9.34	244	164	H
2	*2.38997	52.45	Pk	32	-17.3	0	67.15	-	-	74	-6.85	244	164	H
3	*2.38999	34.38	RMS	32	-17.3	.6	49.68	54	-4.32	-	-	244	164	H
4	*2.38958	35.43	RMS	32	-17.3	.6	50.73	54	-3.27	-	-	244	164	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

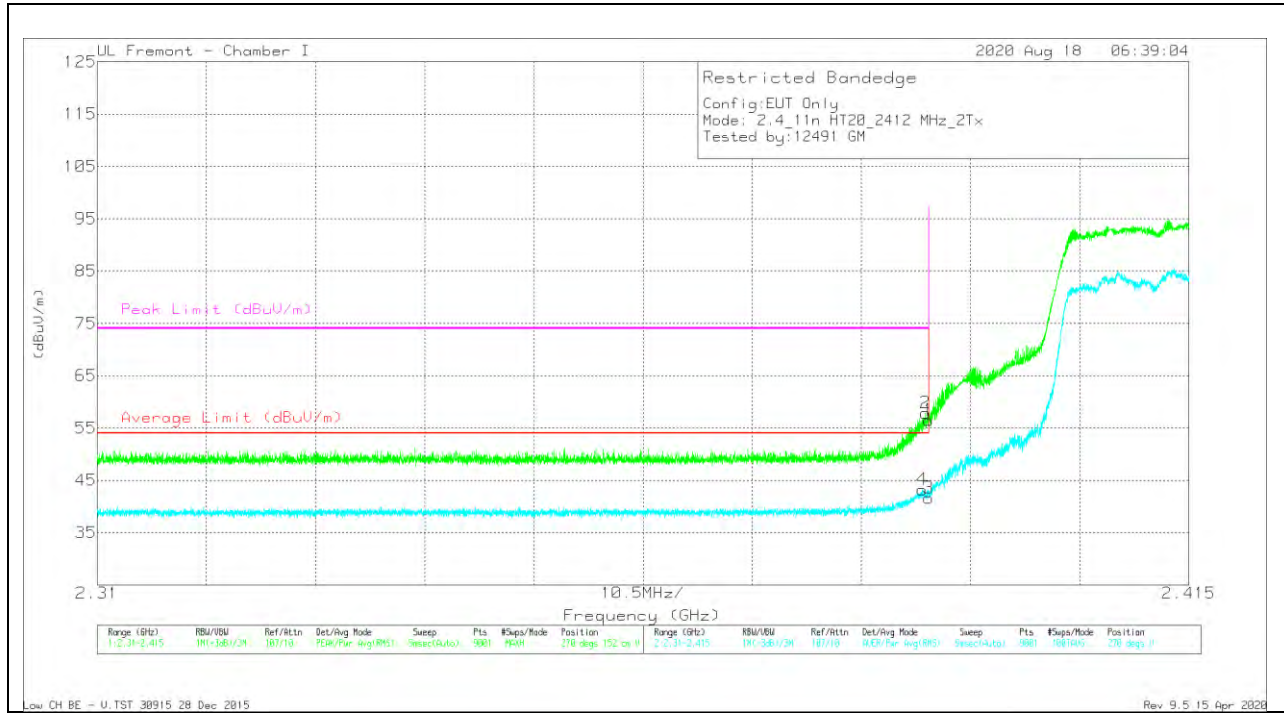


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	41.76	Pk	32	-17.3	0	56.46	-	-	74	-17.54	270	152	V
2	* 2.38966	43.14	Pk	32	-17.3	0	57.84	-	-	74	-16.16	270	152	V
3	* 2.38999	26.25	RMS	32	-17.3	.6	41.55	54	-12.45	-	-	270	152	V
4	* 2.38935	27.96	RMS	32	-17.3	.6	43.26	54	-10.74	-	-	270	152	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

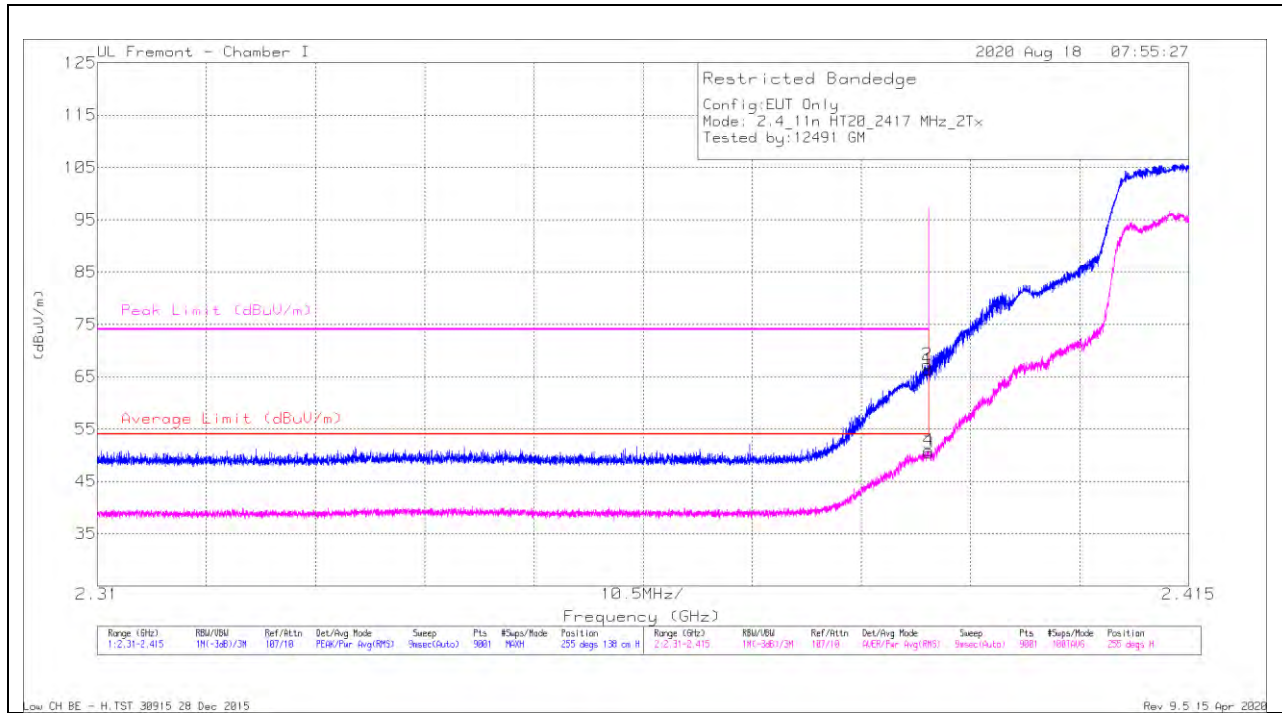

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	51.86	Pk	32	-17.3	0	66.36	-	-	74	-7.64	255	138	H
2	* 2.38988	52.59	Pk	32	-17.3	0	67.29	-	-	74	-6.71	255	138	H
3	* 2.38999	35.06	RMS	32	-17.3	.6	50.36	54	-3.64	-	-	255	138	H
4	* 2.38995	35.57	RMS	32	-17.3	.6	50.87	54	-3.13	-	-	255	138	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection


VERTICAL RESULT

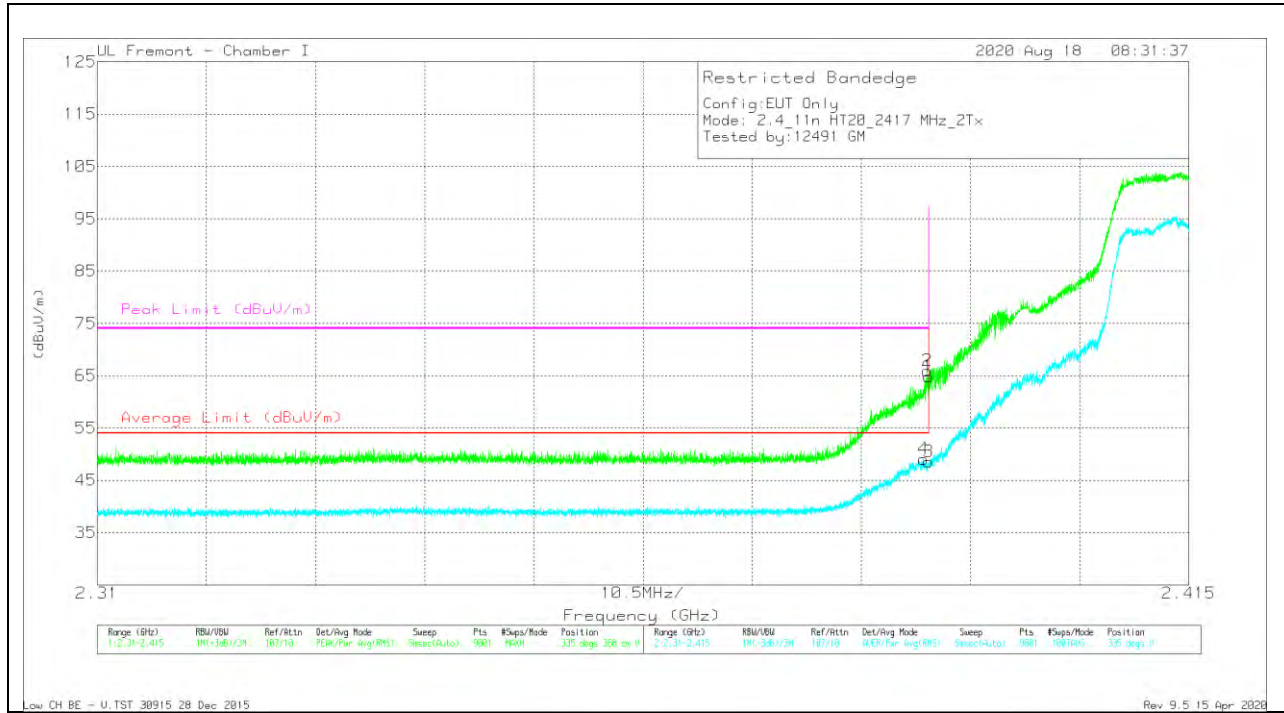

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.38999	50.11	Pk	32	-17.3	0	64.81	-	-	74	-9.19	335	368	V
2	*2.38984	51.19	Pk	32	-17.3	0	65.89	-	-	74	-8.11	335	368	V
3	*2.38999	33.27	RMS	32	-17.3	.6	48.57	54	-5.43	-	-	335	368	V
4	*2.38949	33.74	RMS	32	-17.3	.6	49.04	54	-4.96	-	-	335	368	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection


BANDEDGE (LOW CHANNEL, CH 3) HORIZONTAL RESULT

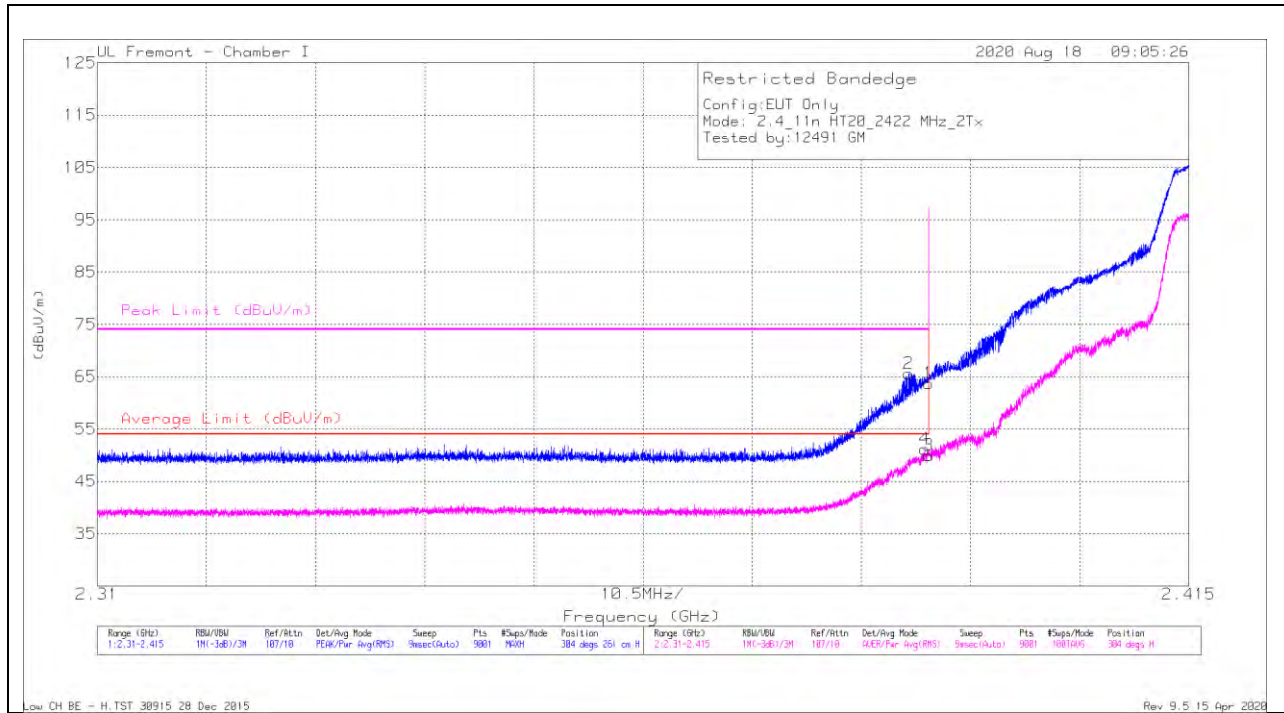

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	49.04	PK	32	-17.3	0	63.74	-	-	74	-10.26	304	261	H
2	* 2.38906	50.9	PK	32	-17.3	0	65.6	-	-	74	-9.4	304	261	H
3	* 2.38999	34.66	RMS	32	-17.3	.6	49.96	54	-4.04	-	-	304	261	H
4	* 2.3896	35.83	RMS	32	-17.3	.6	51.13	54	-2.87	-	-	304	261	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

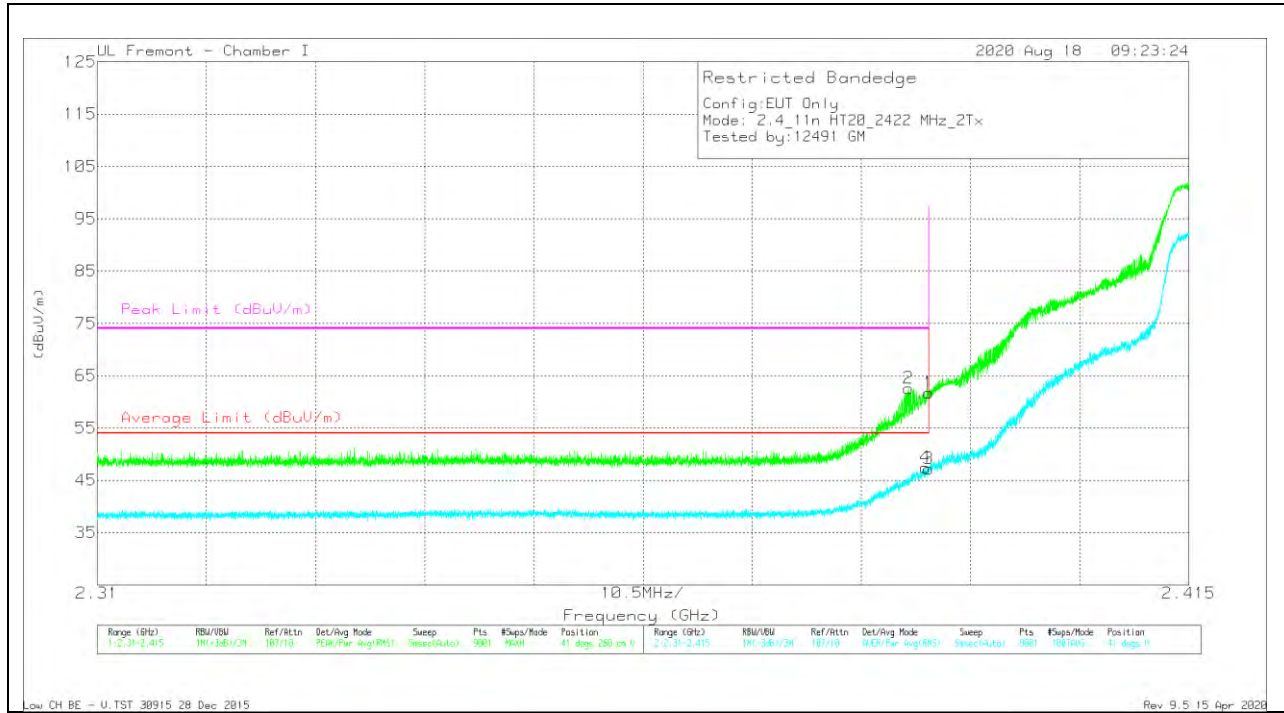


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.38999	47.04	Pk	32	-17.3	0	61.74	-	-	74	-12.26	41	260	V
2	*2.38802	47.85	Pk	32	-17.3	0	62.55	-	-	74	-11.45	41	260	V
3	*2.38999	31.85	RMS	32	-17.3	.6	47.15	54	-6.85	-	-	41	260	V
4	*2.38969	32.09	RMS	32	-17.3	.6	47.39	54	-6.61	-	-	41	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

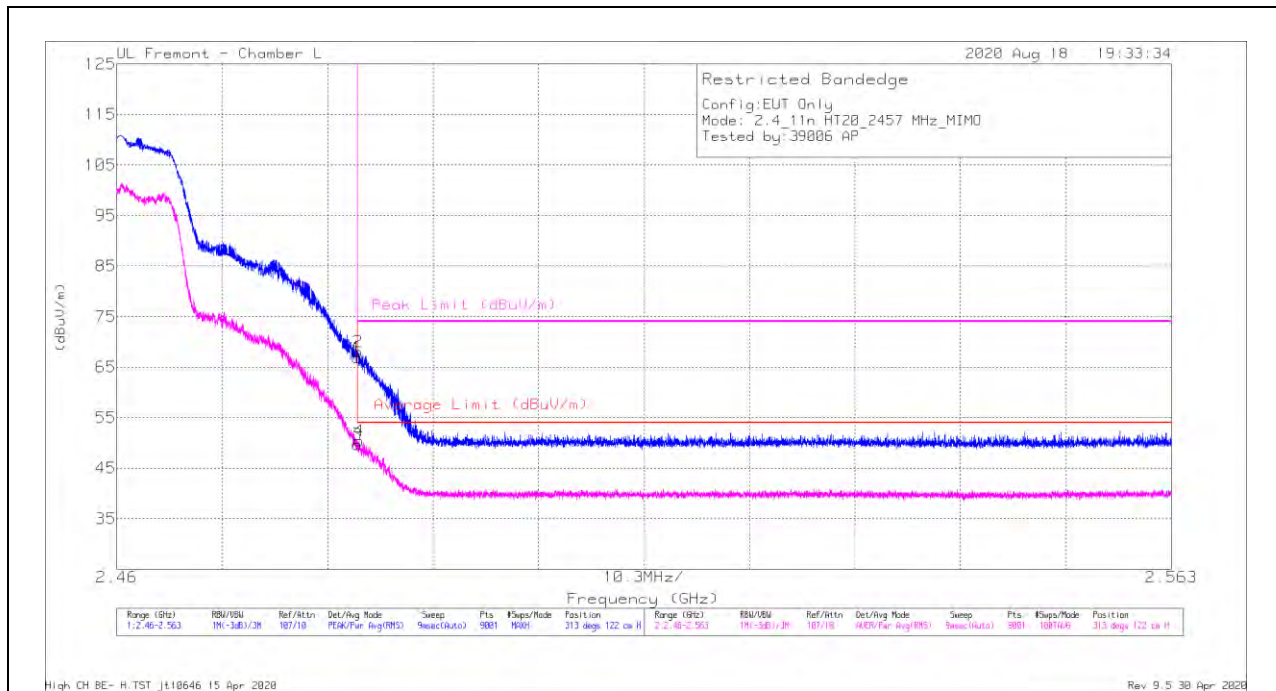

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	55.52	PK	32.3	-20.9	0	66.92	-	-	74	-7.08	313	122	H
2	*2.48353	56.6	PK	32.3	-20.9	0	68	-	-	74	-6	313	122	H
3	*2.48351	37.7	RMS	32.3	-20.9	.6	49.7	54	-4.3	-	-	313	122	H
4	*2.48367	38.47	RMS	32.3	-20.9	.6	50.47	54	-3.53	-	-	313	122	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

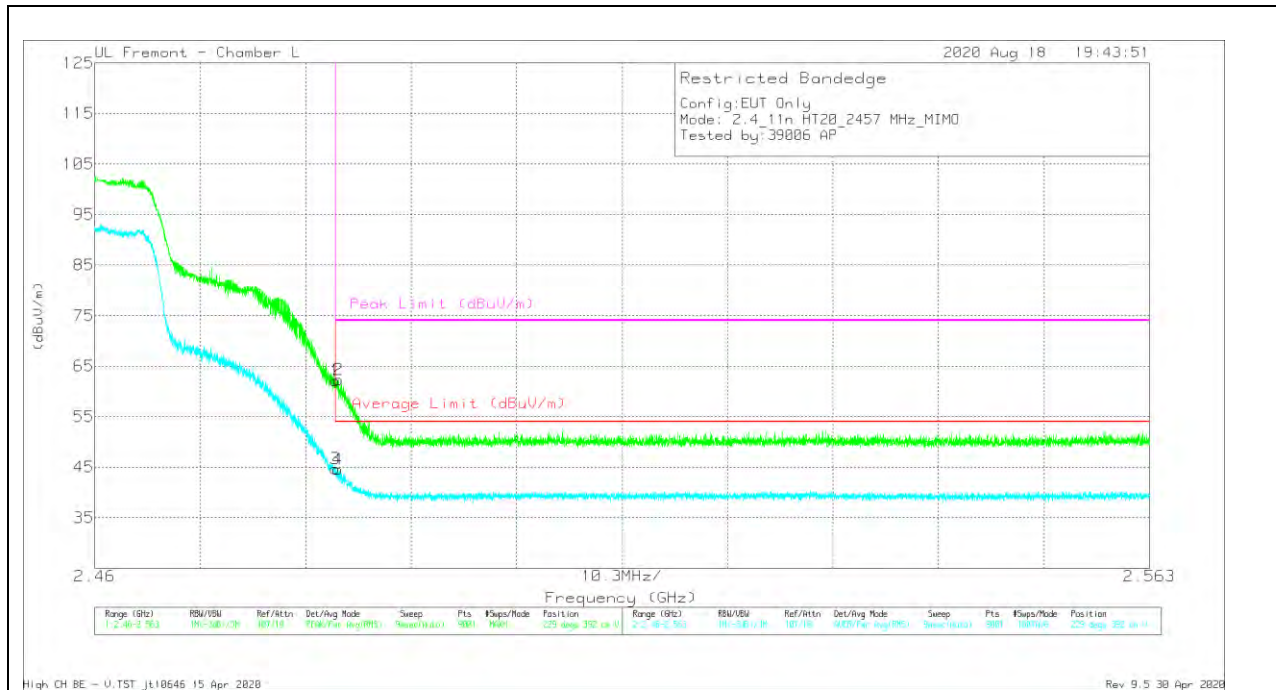


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbll/Filtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	50.69	Pk	32.3	-20.9	0	62.09	-	-	74	-11.91	229	392	V
2	*2.48378	50.94	Pk	32.3	-20.9	0	62.34	-	-	74	-11.66	229	392	V
3	*2.48351	33.3	RMS	32.3	-20.9	0.6	45.3	54	-8.7	-	-	229	392	V
4	*2.48376	33.23	RMS	32.3	-20.9	0.6	45.23	54	-8.77	-	-	229	392	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

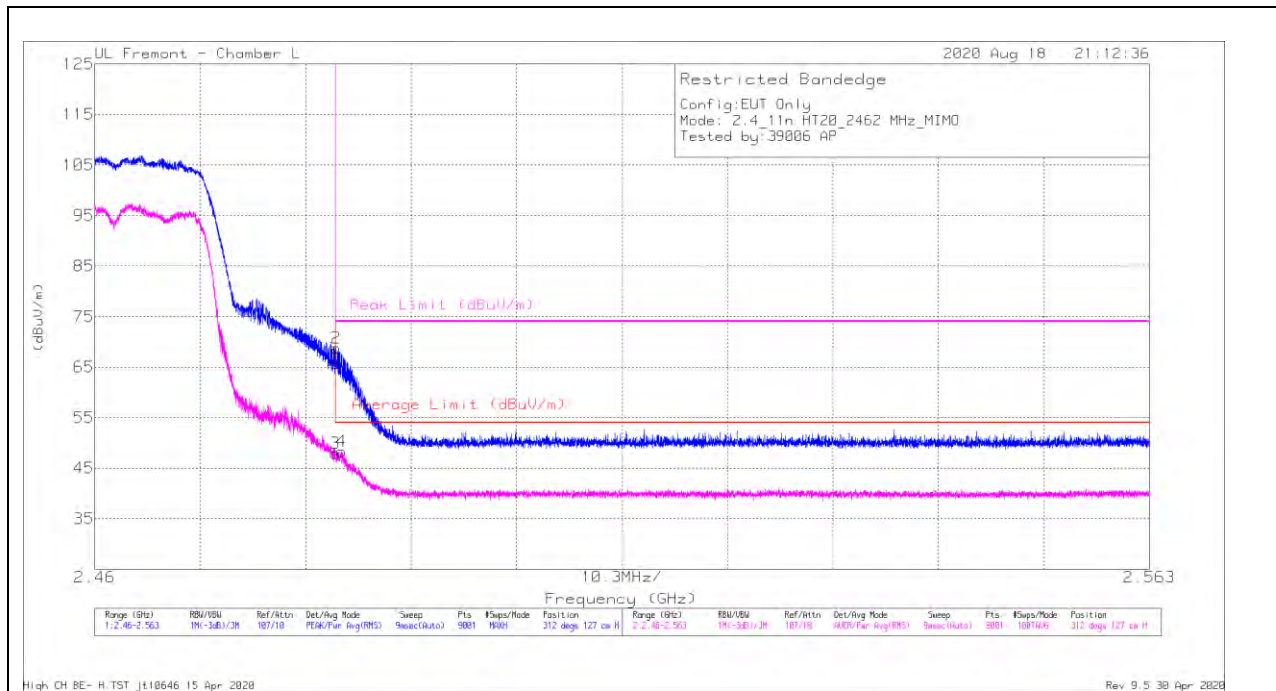

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	54.32	PK	32.3	-20.9	0	65.72	-	-	74	-8.28	312	127	H
2	*2.48355	57.35	PK	32.3	-20.9	0	68.75	-	-	74	-5.25	312	127	H
3	*2.48351	35.88	RMS	32.3	-20.9	6	47.88	54	-6.12	-	-	312	127	H
4	*2.48408	36.3	RMS	32.3	-20.9	6	48.3	54	-5.7	-	-	312	127	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

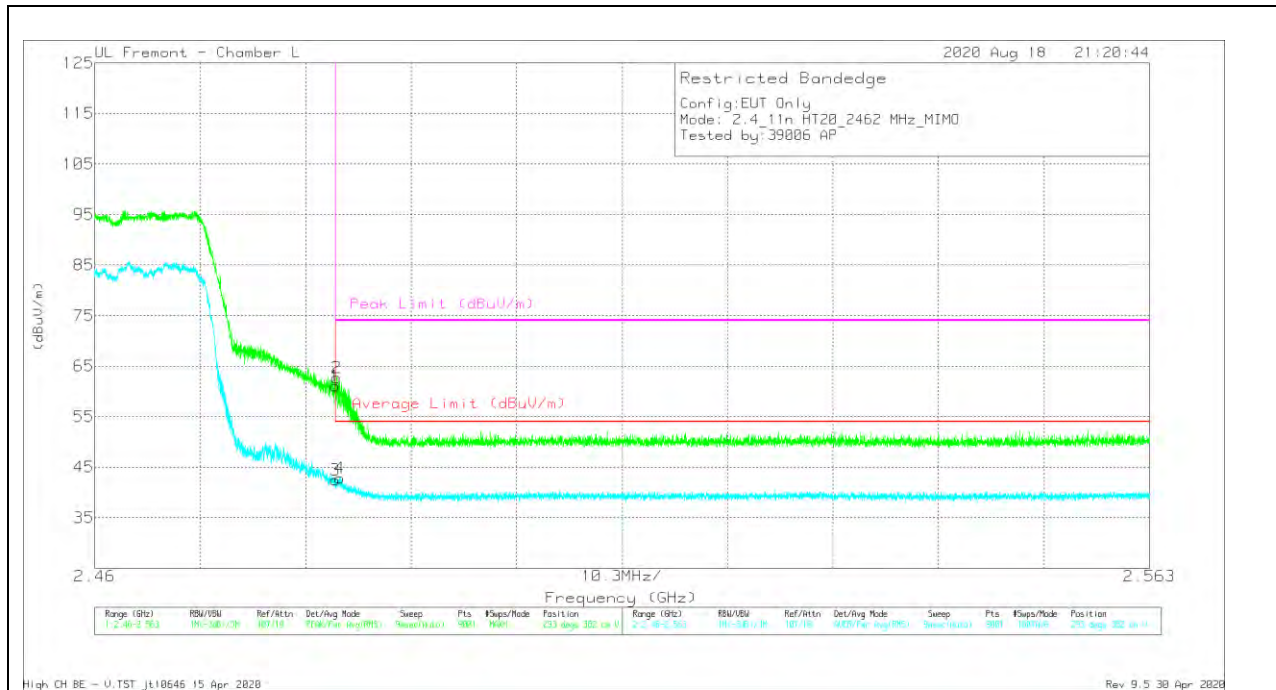


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Filt/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	49.66	Pk	32.3	-20.9	0	61.06	-	-	74	-12.94	293	382	V
2	*2.48362	51.31	Pk	32.3	-20.9	0	62.71	-	-	74	-11.29	293	382	V
3	*2.48351	31.05	RMS	32.3	-20.9	0.6	43.05	54	-10.95	-	-	293	382	V
4	*2.48395	31.47	RMS	32.3	-20.9	0.6	43.47	54	-10.53	-	-	293	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

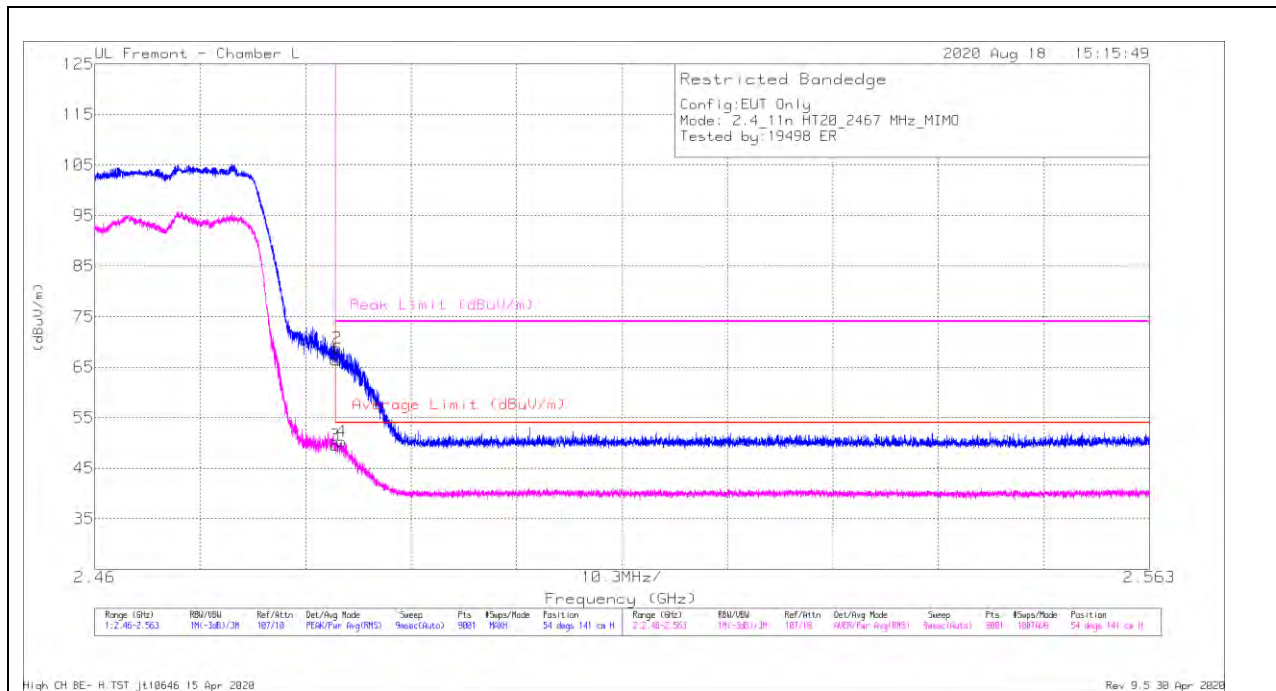

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	55.07	PK	32.3	-20.9	0	66.47	-	-	74	-7.53	54	141	H
2	*2.48365	57.41	PK	32.3	-20.9	0	68.81	-	-	74	-5.19	54	141	H
3	*2.48351	37.56	RMS	32.3	-20.9	.6	49.56	54	-4.44	-	-	54	141	H
4	*2.48414	38.24	RMS	32.3	-20.9	.6	50.24	54	-3.76	-	-	54	141	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

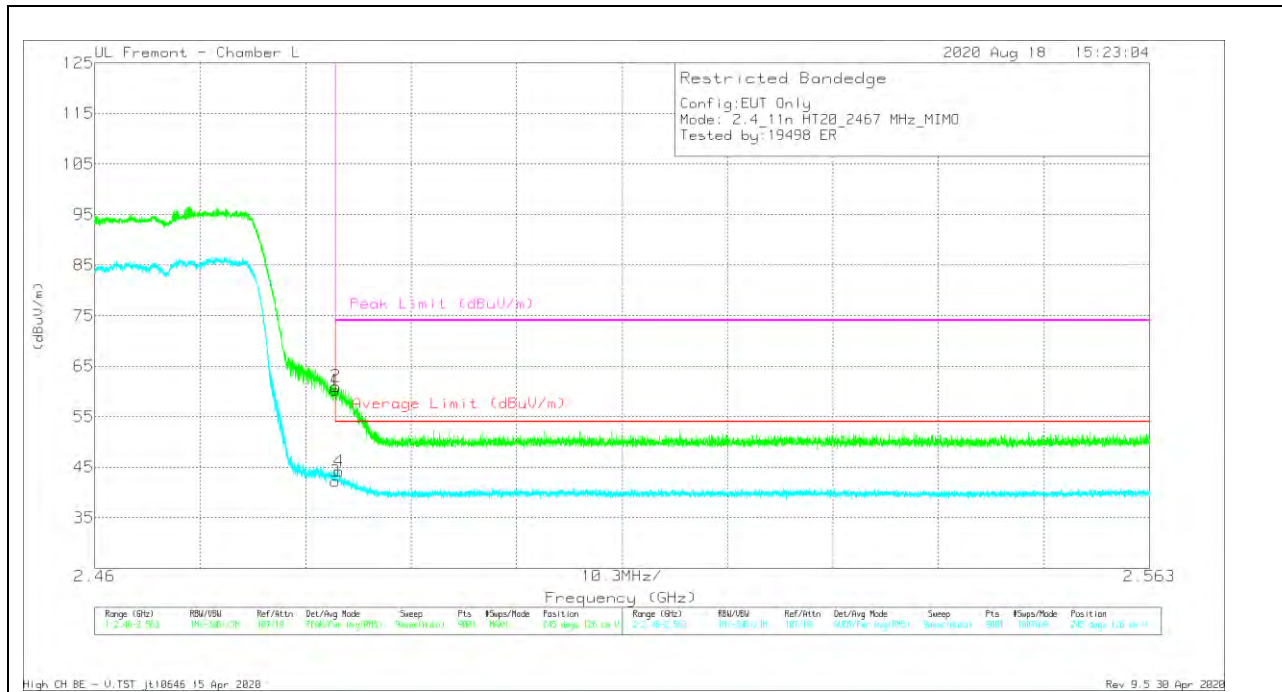


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	48.8	Pk	32.3	-20.9	0	60.2	-	-	74	-13.8	245	126	V
2	*2.48354	49.63	Pk	32.3	-20.9	0	61.03	-	-	74	-12.97	245	126	V
3	*2.48351	30.25	RMS	32.3	-20.9	6	42.25	54	-11.75	-	-	245	126	V
4	*2.48388	32.21	RMS	32.3	-20.9	6	44.21	54	-9.79	-	-	245	126	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

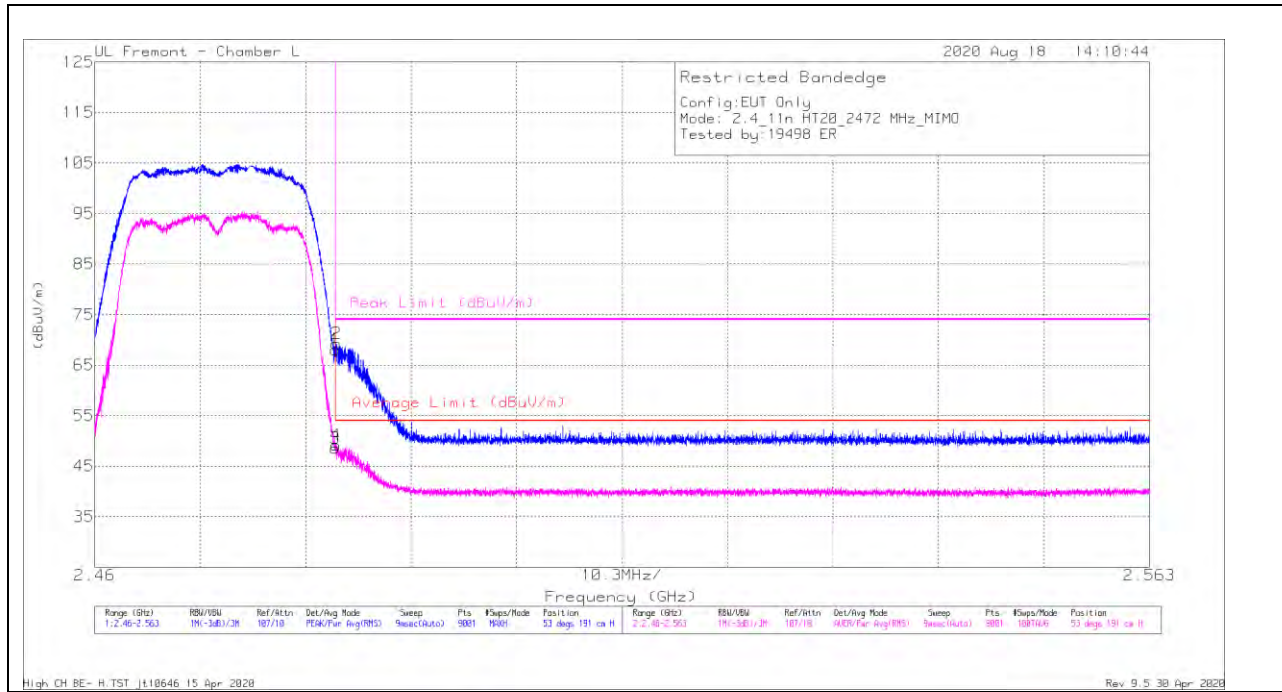

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.71	Pk	32.3	-20.9	0	68.11	-	-	74	-5.89	53	191	H
2	* 2.48359	57.84	Pk	32.3	-20.9	0	69.24	-	-	74	-4.76	53	191	H
3	* 2.48351	36.55	RMS	32.3	-20.9	6	48.55	54	-5.45	-	-	53	191	H
4	* 2.48354	37.12	RMS	32.3	-20.9	6	49.12	54	-4.88	-	-	53	191	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

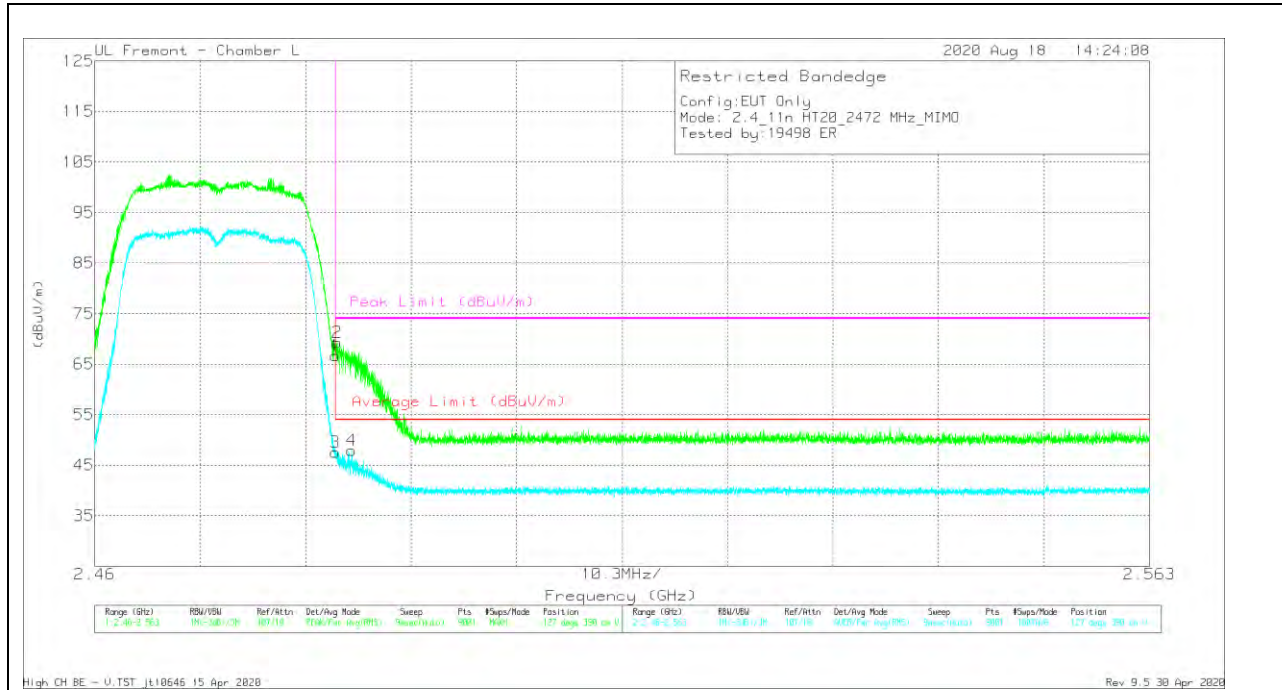


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/CbI/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	55.33	Pk	32.3	-20.0	0	66.73	-	-	74	-7.27	127	390	V
2	*2.48368	57.91	Pk	32.3	-20.0	0	69.31	-	-	74	-4.69	127	390	V
3	*2.48351	35.59	RMS	32.3	-20.0	6	47.59	54	-6.41	-	-	127	390	V
4	*2.48507	35.95	RMS	32.3	-20.0	6	47.95	54	-6.05	-	-	127	390	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

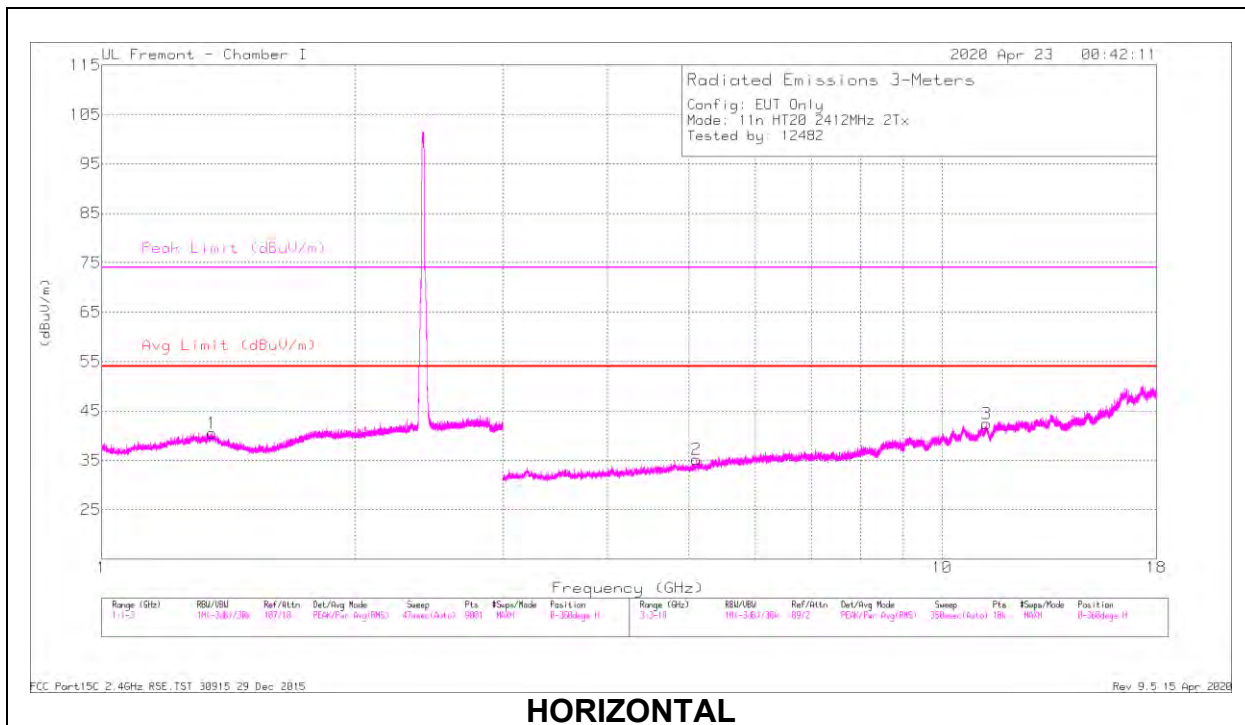

HORIZONTAL

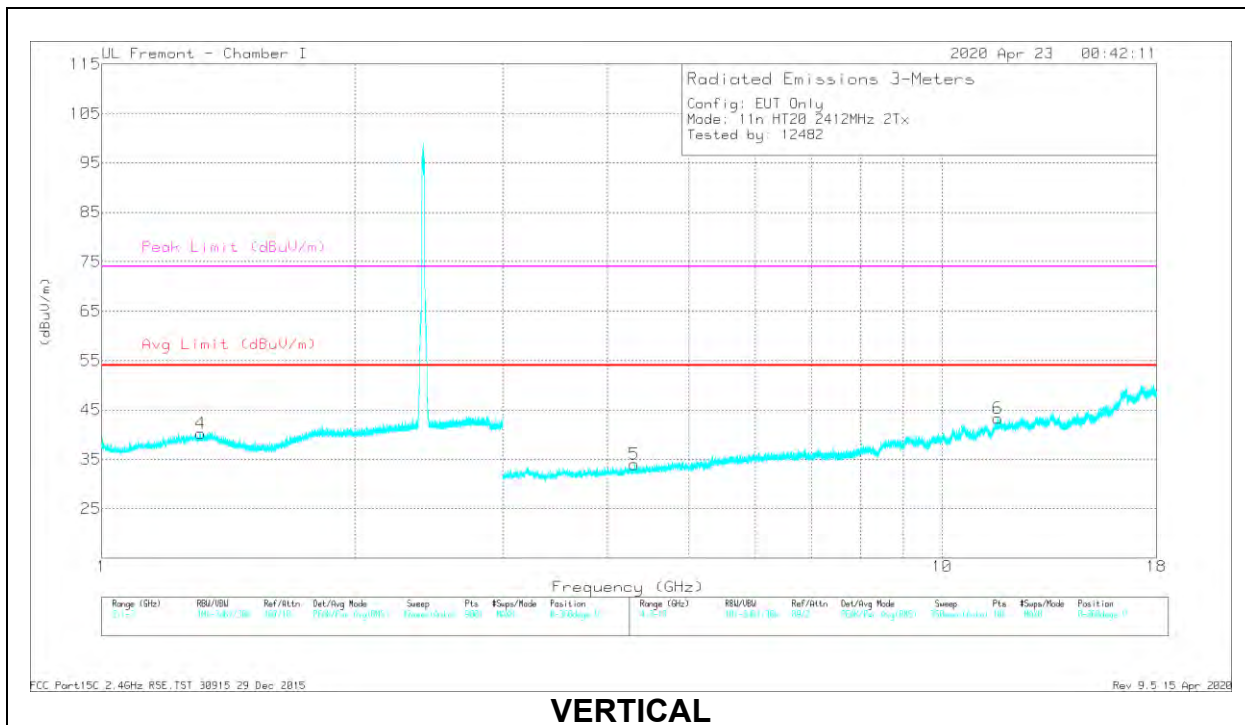

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.35046	38.86	PK2	29.7	-20.9	47.66	-	-	74	-26.34	235	207	H
	* 1.34982	28.68	MAv1	29.6	-20.9	37.38	54	-16.62	-	-	235	207	H
4	* 1.31324	39.92	PK2	29.3	-20.7	48.52	-	-	74	-25.48	244	139	V
	* 1.31333	28.84	MAv1	29.3	-20.7	37.44	54	-16.56	-	-	244	139	V
2	* 5.09812	33.82	PK2	34.3	-25.4	42.72	-	-	74	-31.28	309	387	H
	* 5.10044	23.21	MAv1	34.4	-25.4	32.21	54	-21.79	-	-	309	387	H
3	* 11.2982	31.56	PK2	38.1	-18.9	50.76	-	-	74	-23.24	298	266	H
	* 11.3002	20.8	MAv1	38	-18.9	39.9	54	-14.1	-	-	298	266	H
5	* 4.3038	34.09	PK2	33.5	-27.1	40.49	-	-	74	-33.51	335	187	V
	* 4.30395	24.24	MAv1	33.5	-27.1	30.64	54	-23.36	-	-	335	187	V
6	* 11.65457	31.55	PK2	38.4	-19.7	50.25	-	-	74	-23.75	247	122	V
	* 11.65432	20.63	MAv1	38.4	-19.7	39.33	54	-14.67	-	-	247	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

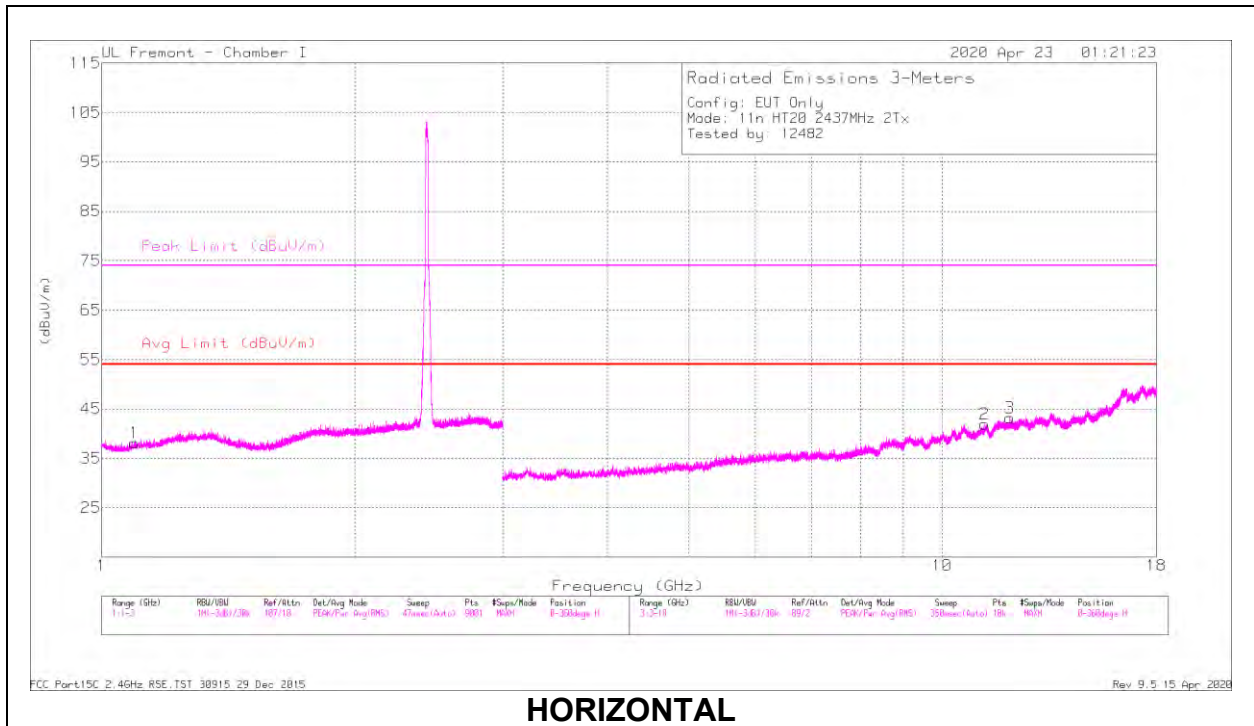

HORIZONTAL

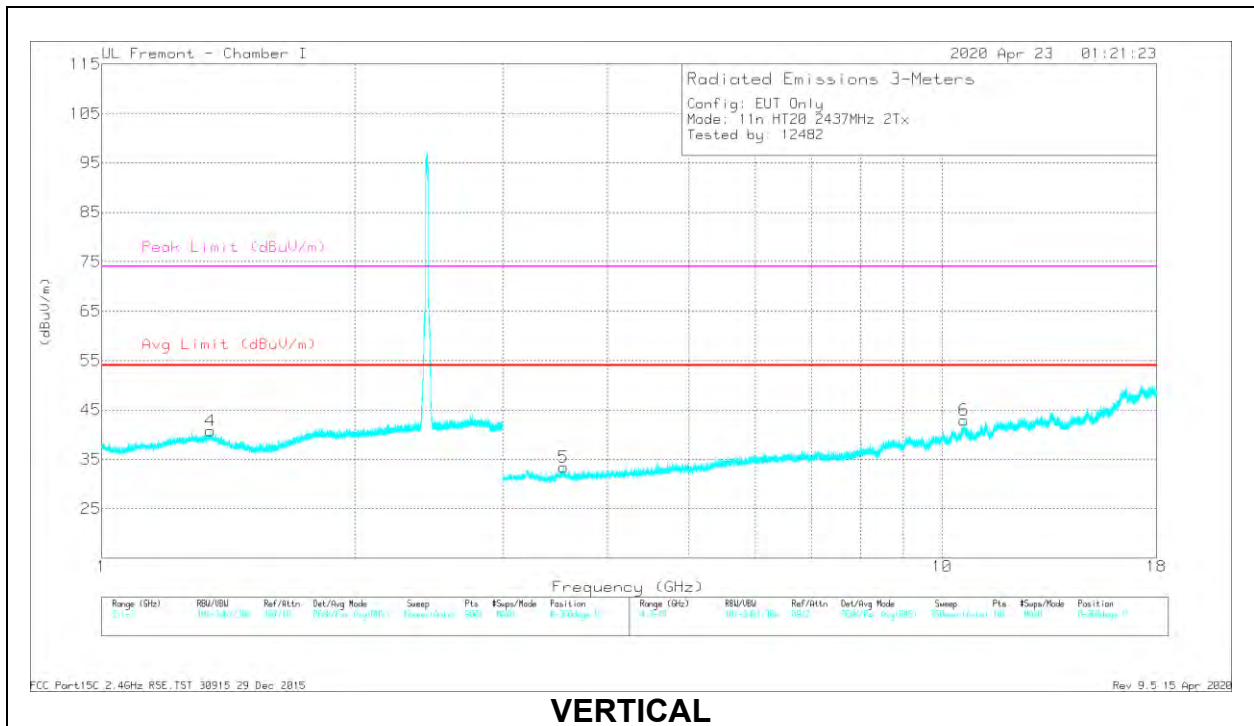

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.09438	40.1	PK2	27.6	-21.7	46	-	-	74	-28	159	249	H
	* 1.09344	30.71	MAv1	27.6	-21.7	36.61	54	-17.39	-	-	159	249	H
4	* 1.34569	39.14	PK2	29.5	-20.8	47.84	-	-	74	-26.16	67	152	V
	* 1.34722	28.69	MAv1	29.5	-20.9	37.29	54	-16.71	-	-	67	152	V
2	* 11.25003	31.23	PK2	37.9	-18.9	50.23	-	-	74	-23.77	100	188	H
	* 11.2514	19.87	MAv1	37.9	-18.9	38.87	54	-15.13	-	-	100	188	H
3	* 12.04145	30.91	PK2	38.8	-19.4	50.31	-	-	74	-23.69	51	258	H
	* 12.04167	21.22	MAv1	38.8	-19.4	40.62	54	-13.38	-	-	51	258	H
5	* 3.54323	35.14	PK2	33	-27.1	41.04	-	-	74	-32.96	263	129	V
	* 3.54261	24.41	MAv1	33	-27.1	30.31	54	-23.69	-	-	263	129	V
6	* 10.62535	31.21	PK2	38	-18.4	50.81	-	-	74	-23.19	145	245	V
	* 10.62616	20.15	MAv1	38	-18.4	39.75	54	-14.25	-	-	145	245	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

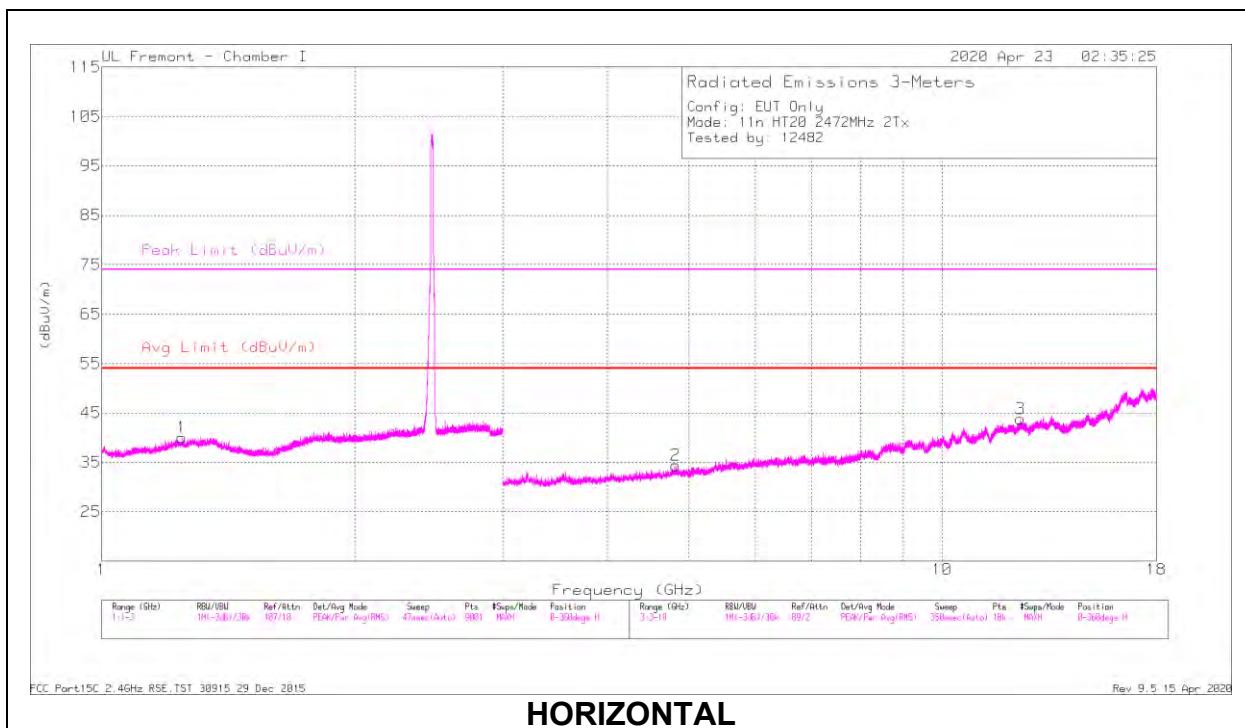

HORIZONTAL

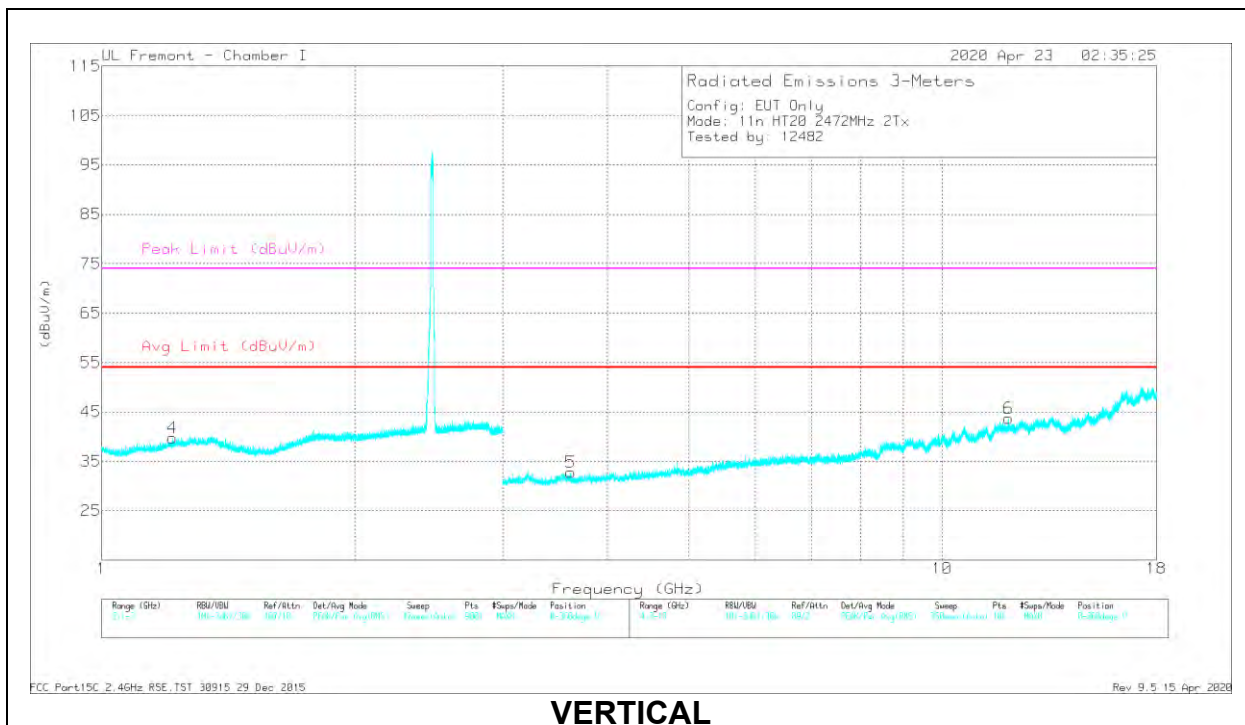

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.24764	39.96	PK2	28.8	-20.6	48.16	-	-	74	-25.84	4	239	H
	* 1.24658	29.09	MAv1	28.8	-20.5	37.39	54	-16.61	-	-	4	239	H
4	* 1.21485	38.73	PK2	28.6	-20.7	46.63	-	-	74	-27.37	153	143	V
	* 1.2122	28.22	MAv1	28.5	-20.7	36.02	54	-17.98	-	-	153	143	V
2	* 4.81747	34.45	PK2	34.2	-25.9	42.75	-	-	74	-31.25	231	243	H
	* 4.81713	24.31	MAv1	34.2	-25.9	32.61	54	-21.39	-	-	231	243	H
3	* 12.40645	31.17	PK2	39	-19.6	50.57	-	-	74	-23.43	34	191	H
	* 12.40306	21.06	MAv1	39	-19.7	40.36	54	-13.64	-	-	34	191	H
5	* 3.61582	36.63	PK2	33	-28.7	40.93	-	-	74	-33.07	60	249	V
	* 3.6175	26.4	MAv1	33	-28.6	30.8	54	-23.2	-	-	60	249	V
6	* 12.00568	30.78	PK2	38.8	-19.7	49.88	-	-	74	-24.12	273	171	V
	* 12.0058	20.67	MAv1	38.8	-19.7	39.77	54	-14.23	-	-	273	171	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

10.1.3. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 2.4 GHz BAND

1TX ANT 4 MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

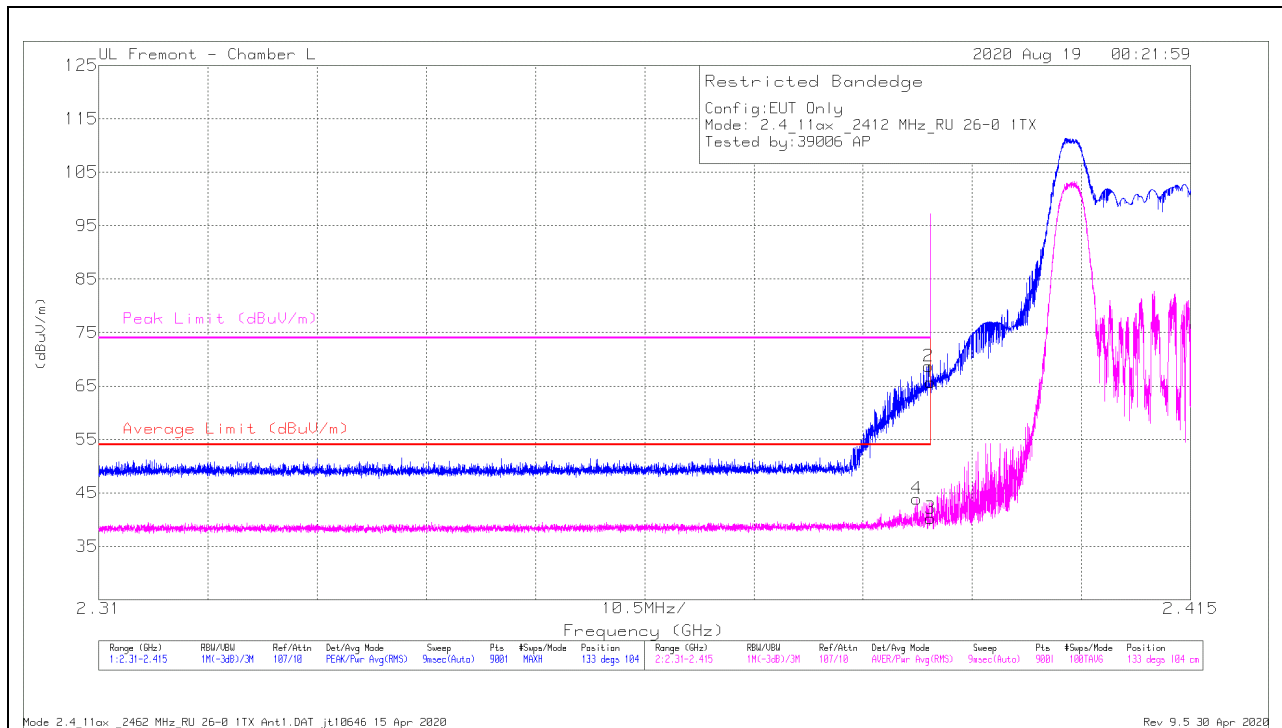

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	54.92	Pk	31.9	-21.1	65.72	-	-	74	-8.28	133	104	H
2	* 2.38977	57.88	Pk	31.9	-21.1	68.68	-	-	74	-5.32	133	104	H
3	* 2.38999	29.43	RMS	31.9	-21.1	40.23	54	-13.77	-	-	133	104	H
4	* 2.38868	33.11	RMS	31.9	-21.1	43.91	54	-10.09	-	-	133	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

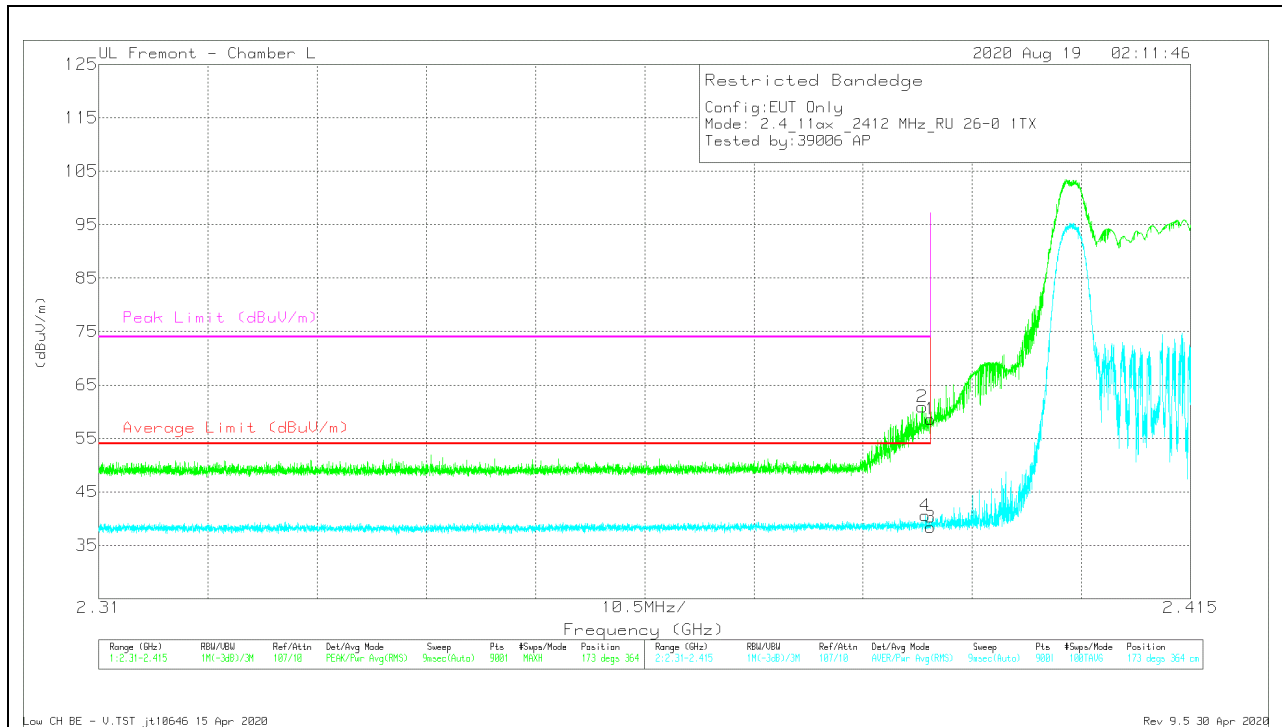


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	47.8	Pk	31.9	-21.1	58.6	-	-	74	-15.4	173	364	V
2	* 2.3892	50.09	Pk	31.9	-21.1	60.89	-	-	74	-13.11	173	364	V
3	* 2.38999	27.56	RMS	31.9	-21.1	38.36	54	-15.64	-	-	173	364	V
4	* 2.38948	29.76	RMS	31.9	-21.1	40.56	54	-13.44	-	-	173	364	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

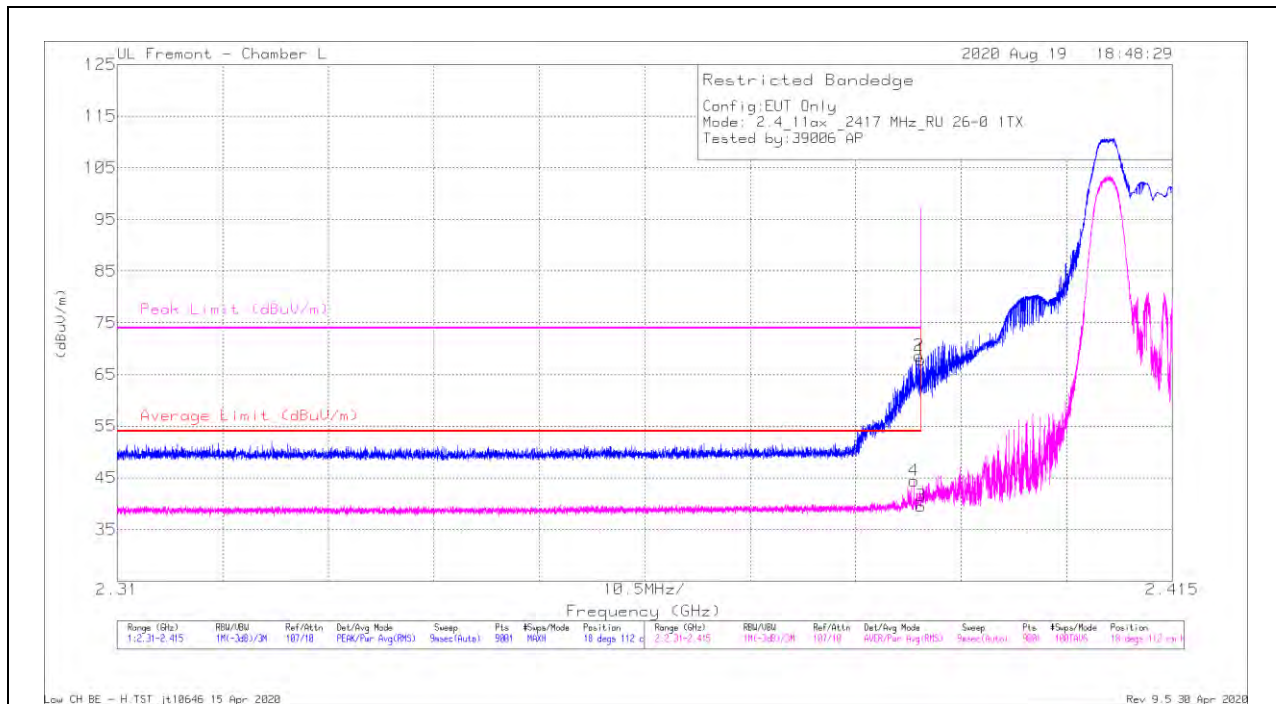

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	57.07	Pk	31.9	-21.1	67.87	-	-	74	-6.13	18	112	H
2	* 2.38977	57.85	Pk	31.9	-21.1	68.65	-	-	74	-5.35	18	112	H
3	* 2.38999	28.74	RMS	31.9	-21.1	39.54	54	-14.46	-	-	18	112	H
4	* 2.3893	33.63	RMS	31.9	-21.1	44.43	54	-9.57	-	-	18	112	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

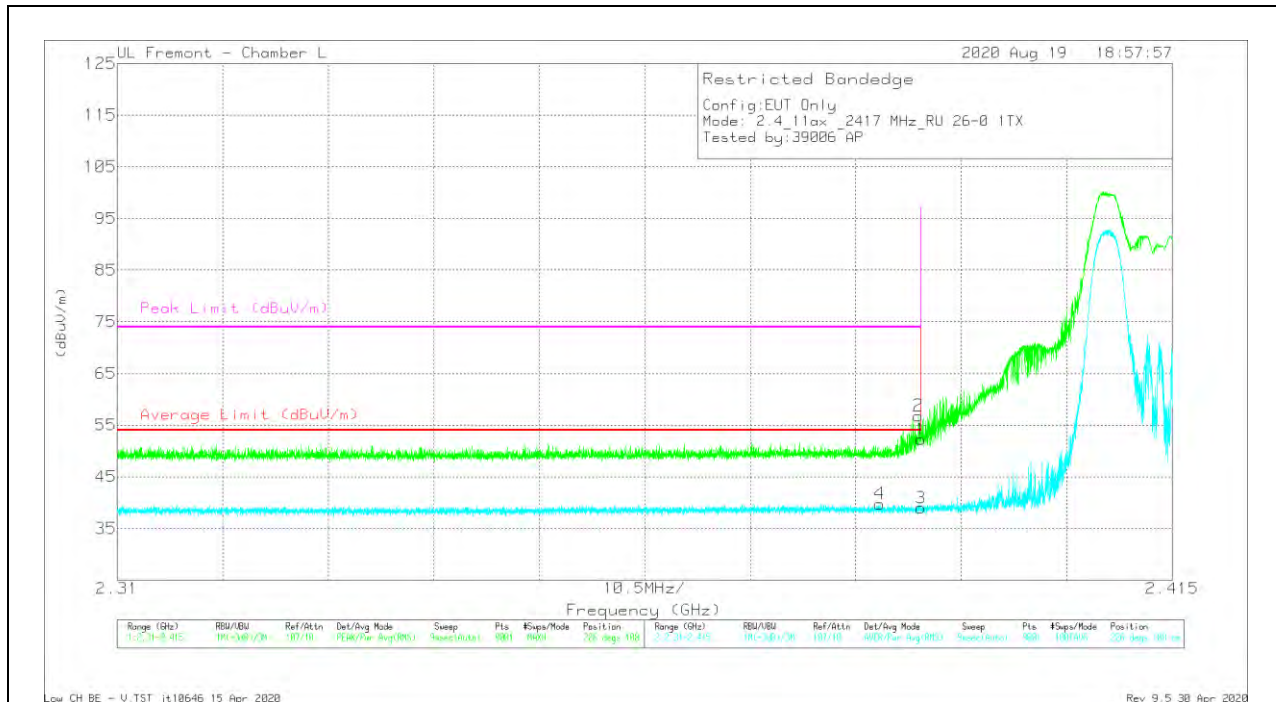


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Paid (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	41.46	Pk	31.9	-21.1	52.26	-	-	74	-21.74	226	108	V
2	* 2.38972	46.01	Pk	31.9	-21.1	56.81	-	-	74	-17.19	226	108	V
3	* 2.38999	28.18	RMS	31.9	-21.1	38.98	54	-15.02	-	-	226	108	V
4	* 2.38588	29.07	RMS	31.8	-21.1	39.77	54	-14.23	-	-	226	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

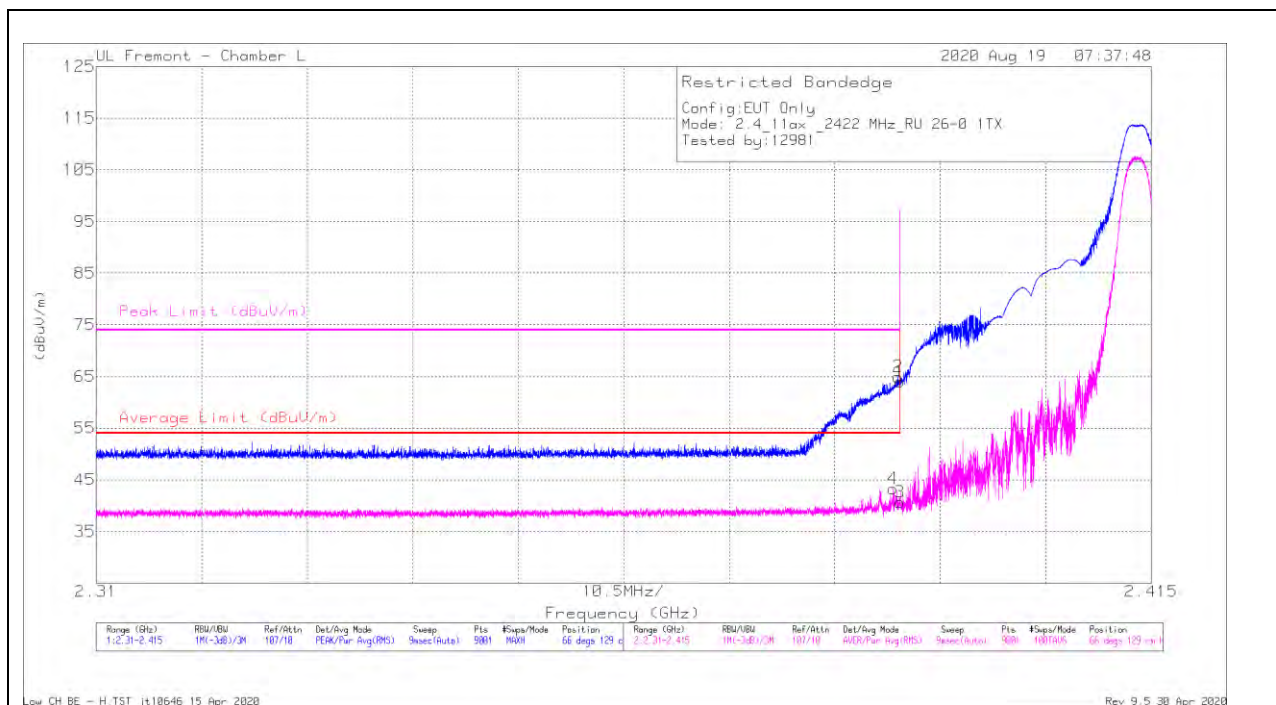

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	53.14	Pk	31.9	-21.1	63.94	-	-	74	-10.06	66	129	H
2	* 2.38978	54.14	Pk	31.9	-21.1	64.94	-	-	74	-9.06	66	129	H
3	* 2.38999	29.84	RMS	31.9	-21.1	40.64	54	-13.36	-	-	66	129	H
4	* 2.38931	32.46	RMS	31.9	-21.1	43.26	54	-10.74	-	-	66	129	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

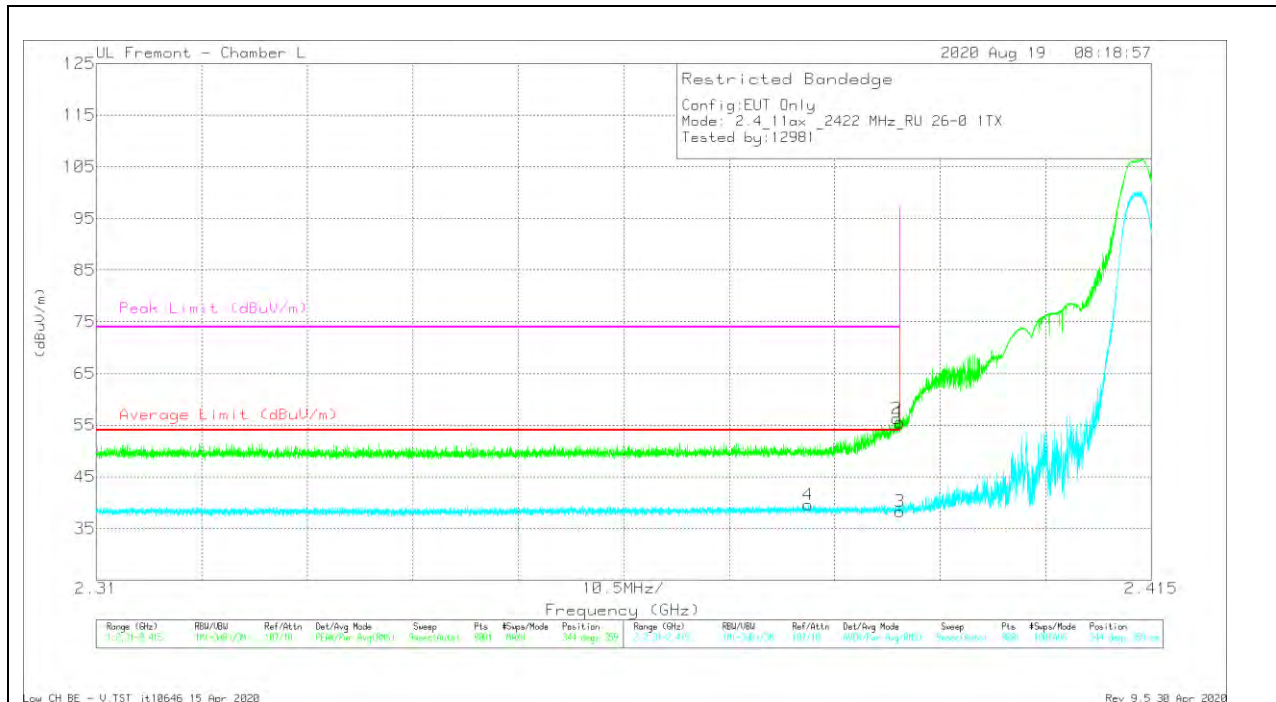


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	44.7	Pk	31.9	-21.1	55.5	-	-	74	-18.5	344	359	V
2	* 2.38965	45.49	Pk	31.9	-21.1	56.29	-	-	74	-17.71	344	359	V
3	* 2.38999	27.47	RMS	31.9	-21.1	38.27	54	-15.73	-	-	344	359	V
4	* 2.38084	28.9	RMS	31.8	-21.1	39.6	54	-14.4	-	-	344	359	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

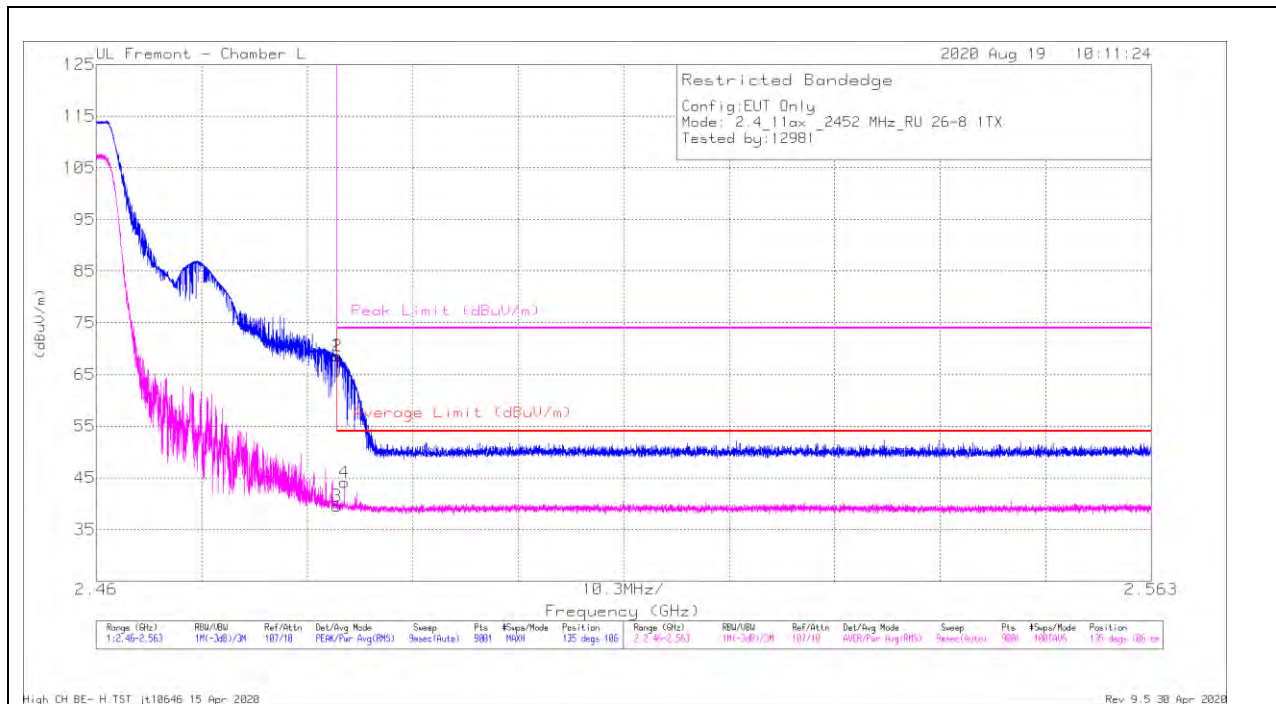

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	57.24	Pk	32.3	-20.9	68.64	-	-	74	-5.36	135	106	H
2	* 2.48356	57.16	Pk	32.3	-20.9	68.56	-	-	74	-5.44	135	106	H
3	* 2.48351	28.1	RMS	32.3	-20.9	39.5	54	-14.5	-	-	135	106	H
4	* 2.4842	32.7	RMS	32.3	-20.9	44.1	54	-9.9	-	-	135	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

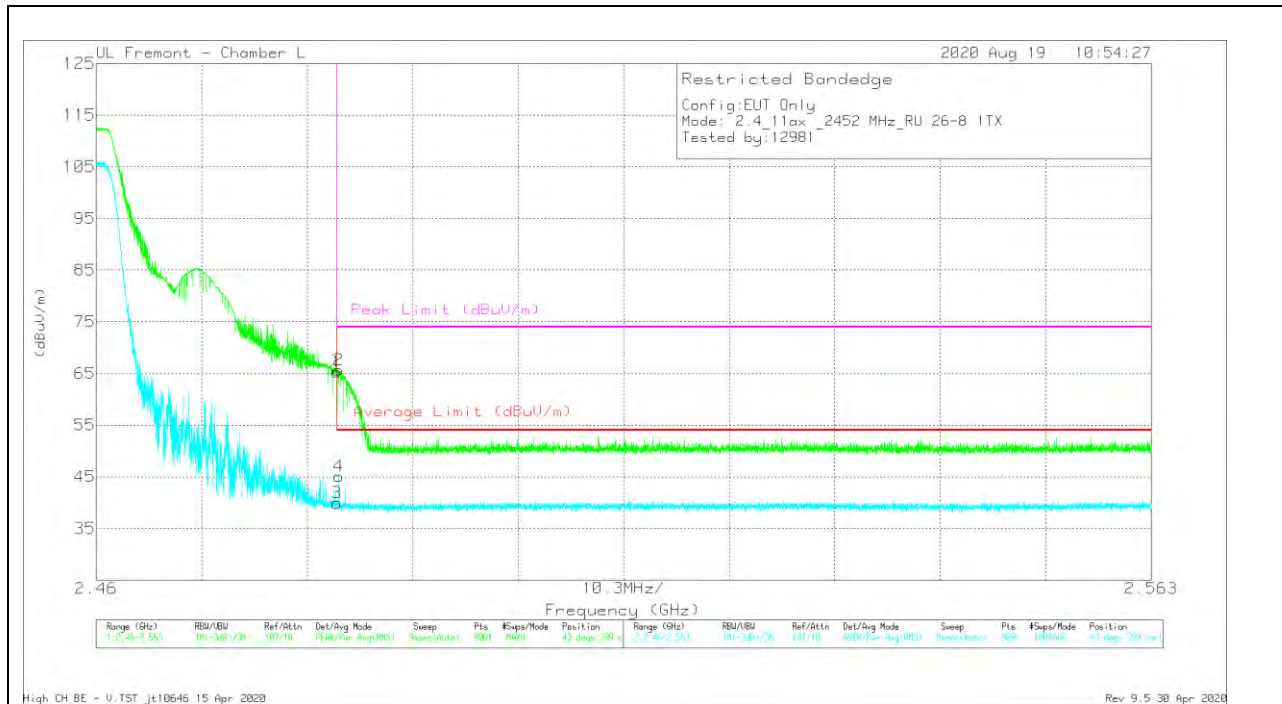


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Paid (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	53.88	Pk	32.3	-20.9	65.28	-	-	74	-8.72	43	399	V
2	*2.48363	54.25	Pk	32.3	-20.9	65.65	-	-	74	-8.35	43	399	V
3	*2.48351	28.52	RMS	32.3	-20.9	39.92	54	-14.08	-	-	43	399	V
4	*2.48369	33.67	RMS	32.3	-20.9	45.07	54	-8.93	-	-	43	399	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

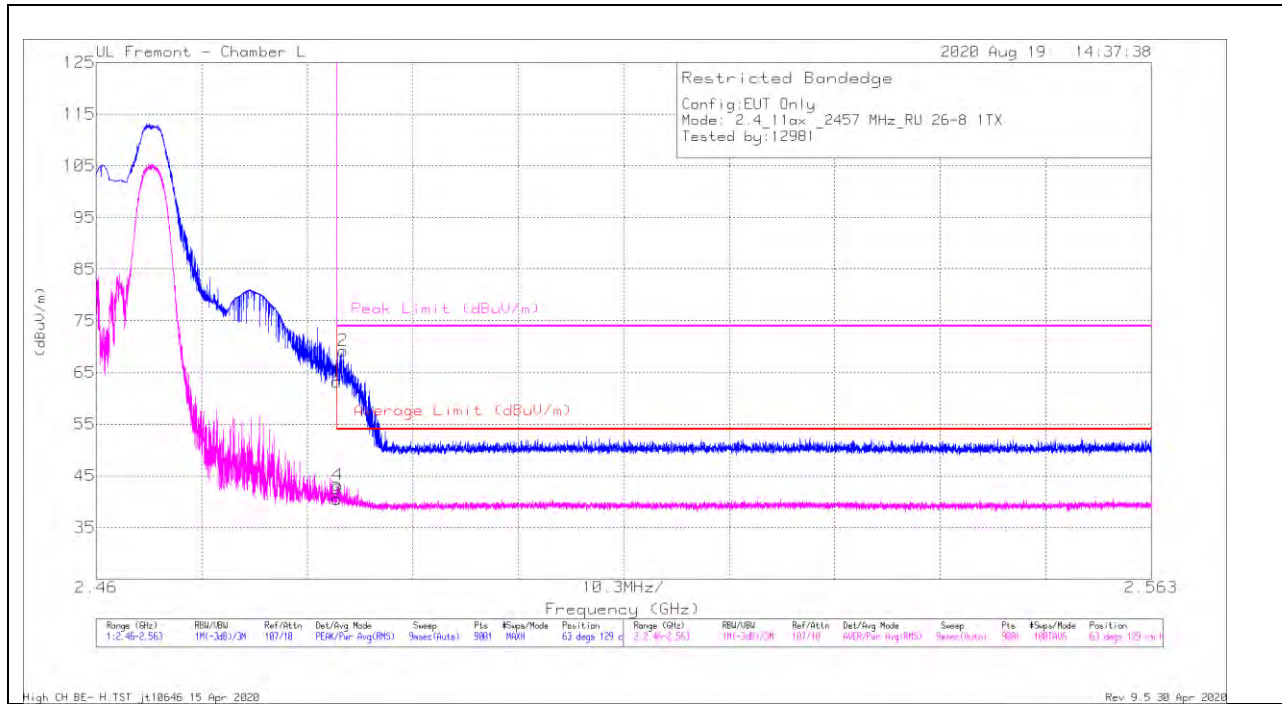

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	51.78	Pk	32.3	-20.9	63.18	-	-	74	-10.82	63	129	H
2	* 2.4841	57.83	Pk	32.3	-20.9	69.23	-	-	74	-4.77	63	129	H
3	* 2.48351	29.14	RMS	32.3	-20.9	40.54	54	-13.46	-	-	63	129	H
4	* 2.48359	31.79	RMS	32.3	-20.9	43.19	54	-10.81	-	-	63	129	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

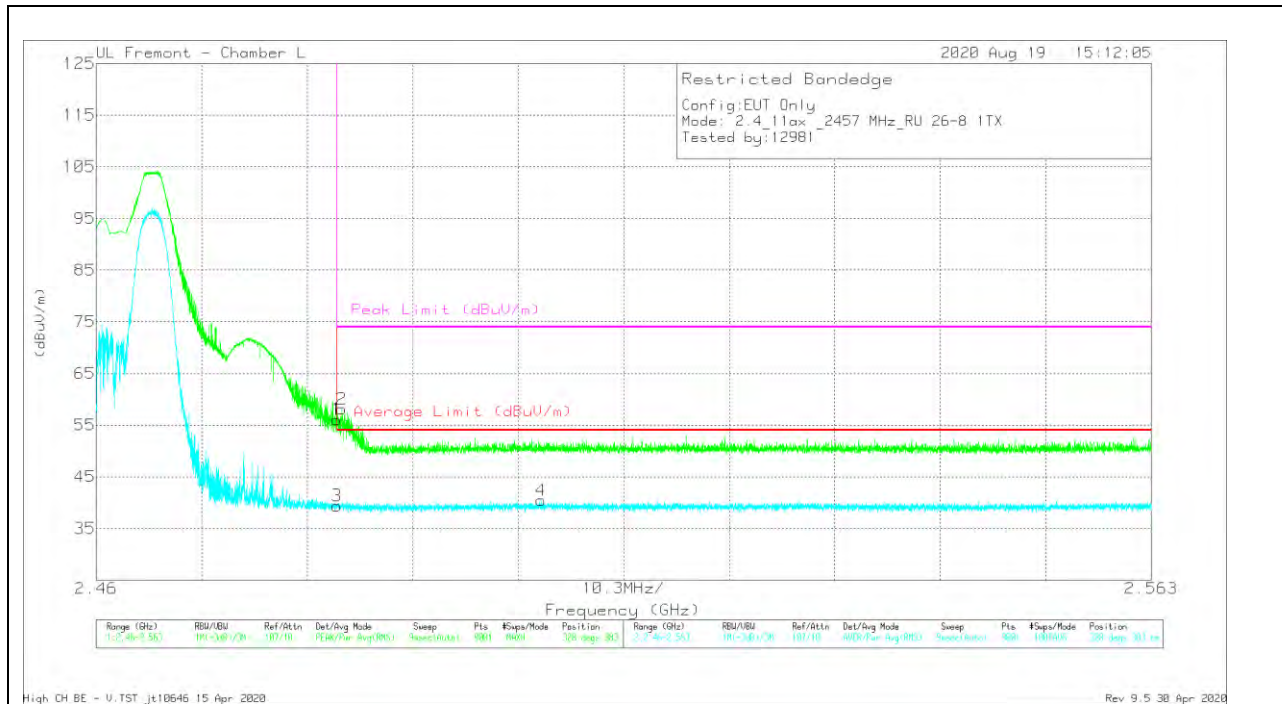


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Ctrl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	44.67	Pk	32.3	-20.9	56.07	-	-	74	-17.93	328	383	V
2	* 2.48395	46.69	Pk	32.3	-20.9	58.09	-	-	74	-15.91	328	383	V
3	* 2.48351	27.97	RMS	32.3	-20.9	39.37	54	-14.63	-	-	328	383	V
4	2.50341	28.93	RMS	32.4	-20.9	40.43	54	-13.57	-	-	328	383	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

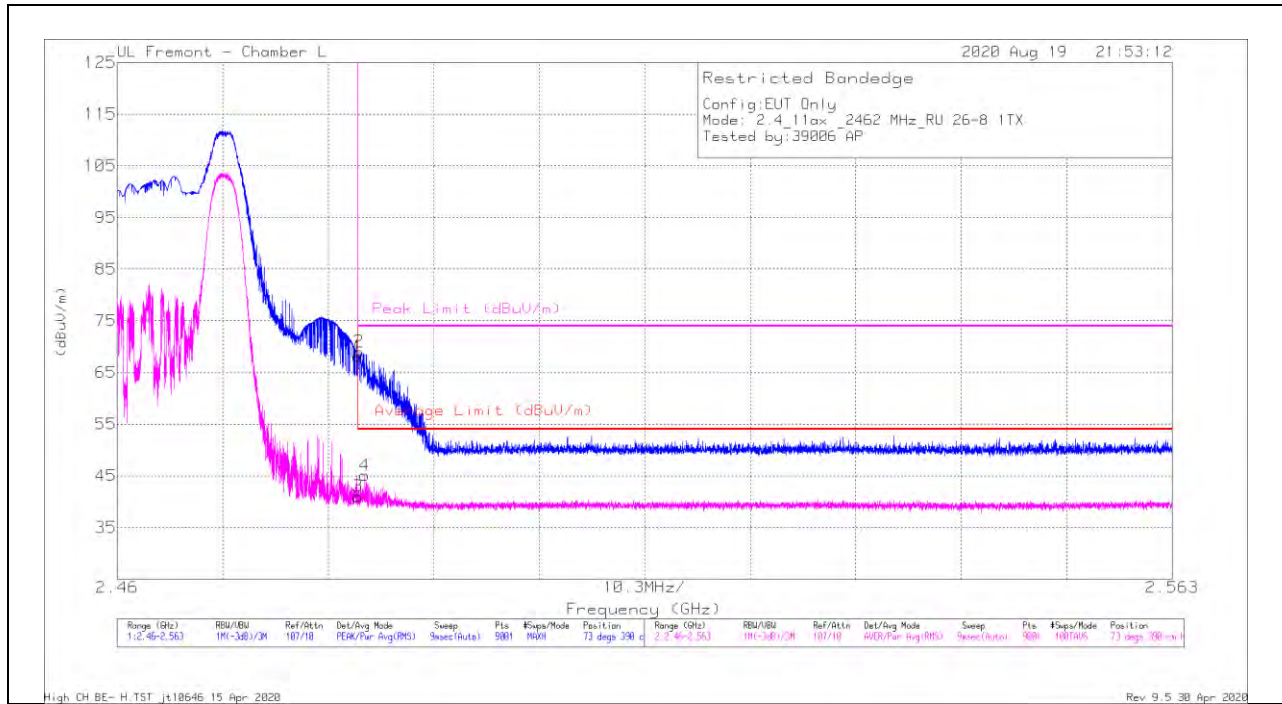

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.71	Pk	32.3	-20.9	68.11	-	-	74	-5.89	73	390	H
2	* 2.48361	57.6	Pk	32.3	-20.9	69	-	-	74	-5	73	390	H
3	* 2.48351	29.6	RMS	32.3	-20.9	41	54	-13	-	-	73	390	H
4	* 2.48418	33.68	RMS	32.3	-20.9	45.08	54	-8.92	-	-	73	390	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

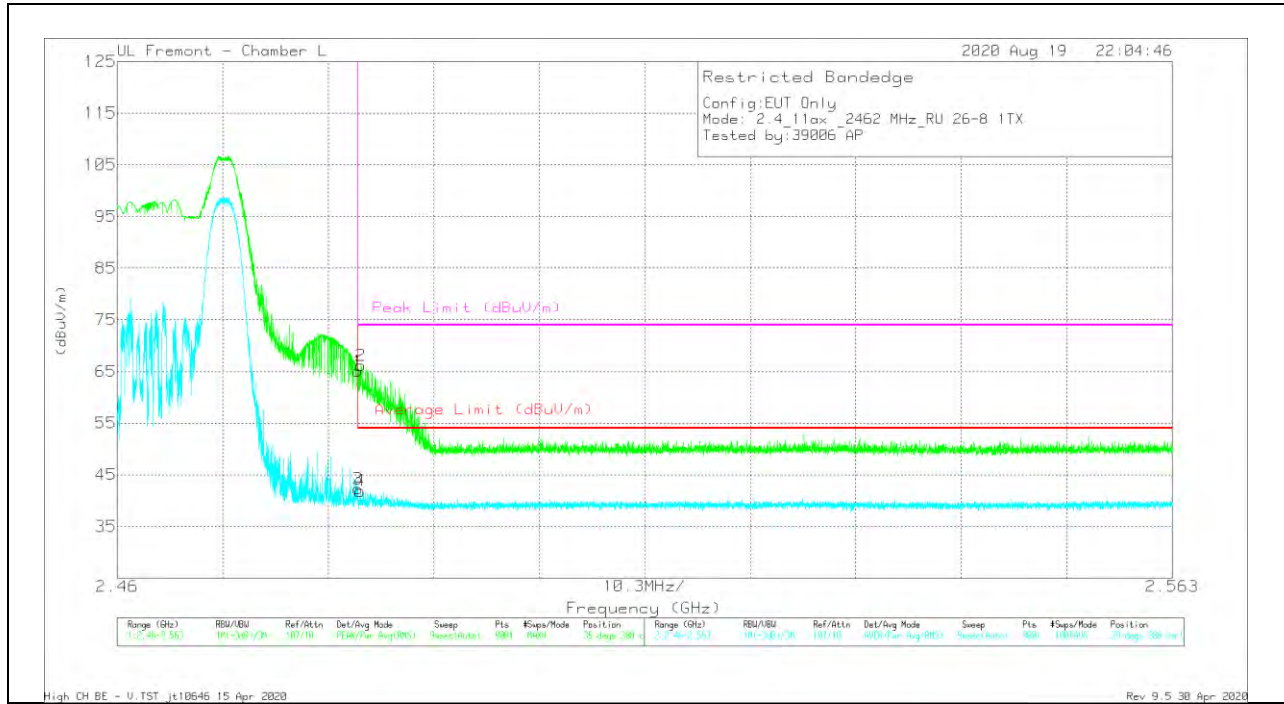


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Ctrl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.64	Pk	32.3	-20.9	65.04	-	-	74	-8.96	39	388	V
2	* 2.48382	54.73	Pk	32.3	-20.9	66.13	-	-	74	-7.87	39	388	V
3	* 2.48351	30.85	RMS	32.3	-20.9	42.25	54	-11.75	-	-	39	388	V
4	* 2.4837	30.47	RMS	32.3	-20.9	41.87	54	-12.13	-	-	39	388	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

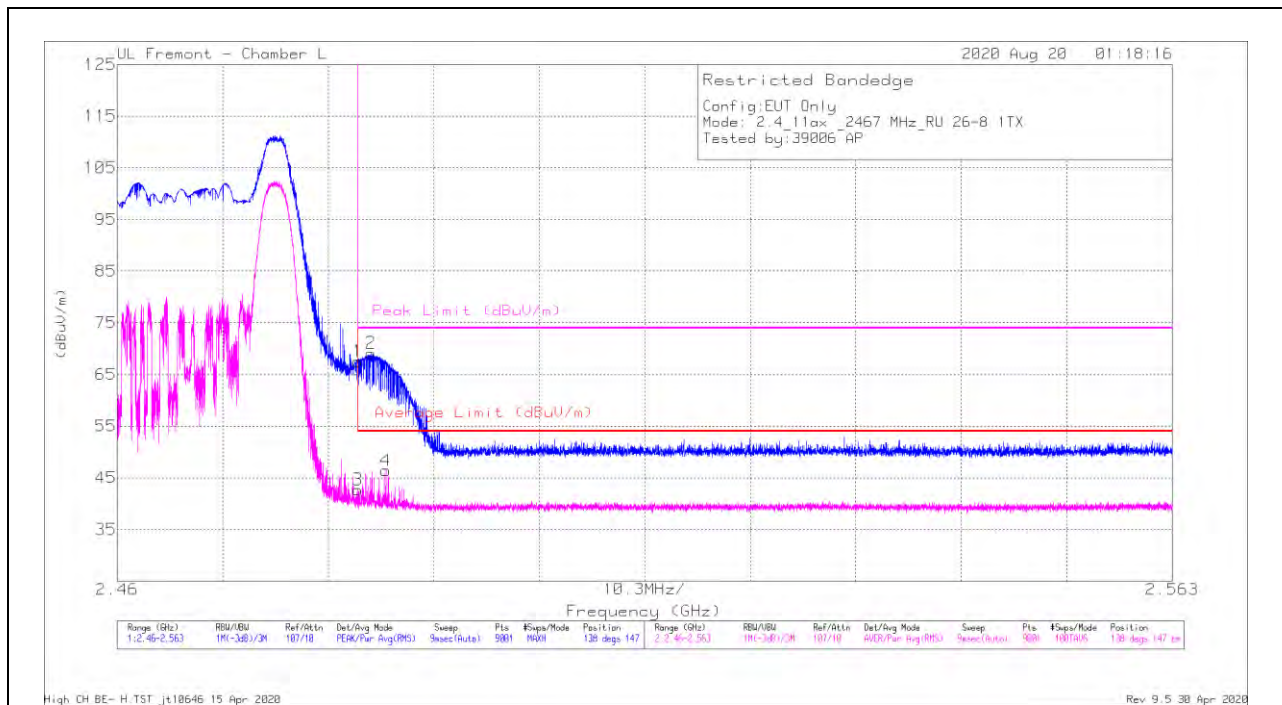

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	58.11	Pk	32.3	-20.9	67.51	-	-	74	-6.49	138	147	H
2	* 2.48479	57.71	Pk	32.3	-20.9	69.11	-	-	74	-4.89	138	147	H
3	* 2.48351	31.26	RMS	32.3	-20.9	42.66	54	-11.34	-	-	138	147	H
4	* 2.48622	35.02	RMS	32.3	-20.9	46.42	54	-7.58	-	-	138	147	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

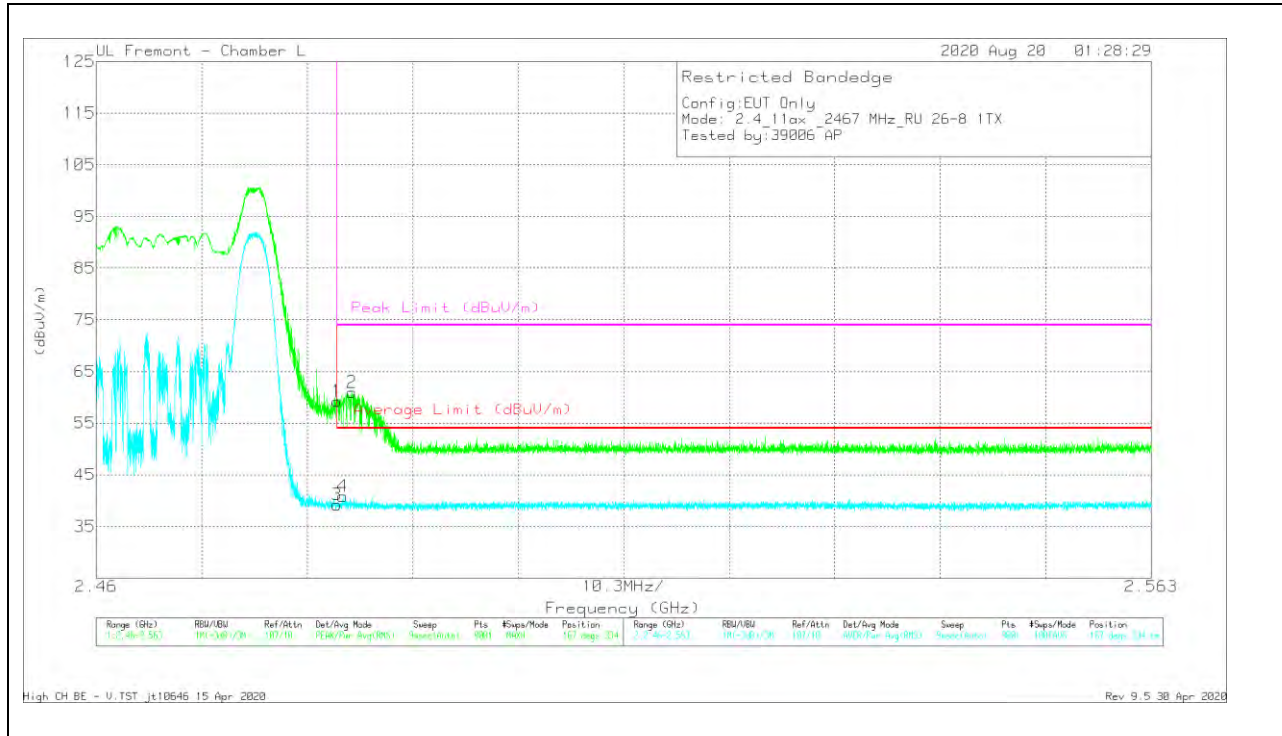


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	47.84	Pk	32.3	-20.9	59.24	-	-	74	-14.76	167	334	V
2	* 2.48496	49.53	Pk	32.3	-20.9	60.93	-	-	74	-13.07	167	334	V
3	* 2.48351	27.8	RMS	32.3	-20.9	39.2	54	-14.8	-	-	167	334	V
4	* 2.48407	29.43	RMS	32.3	-20.9	40.83	54	-13.17	-	-	167	334	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

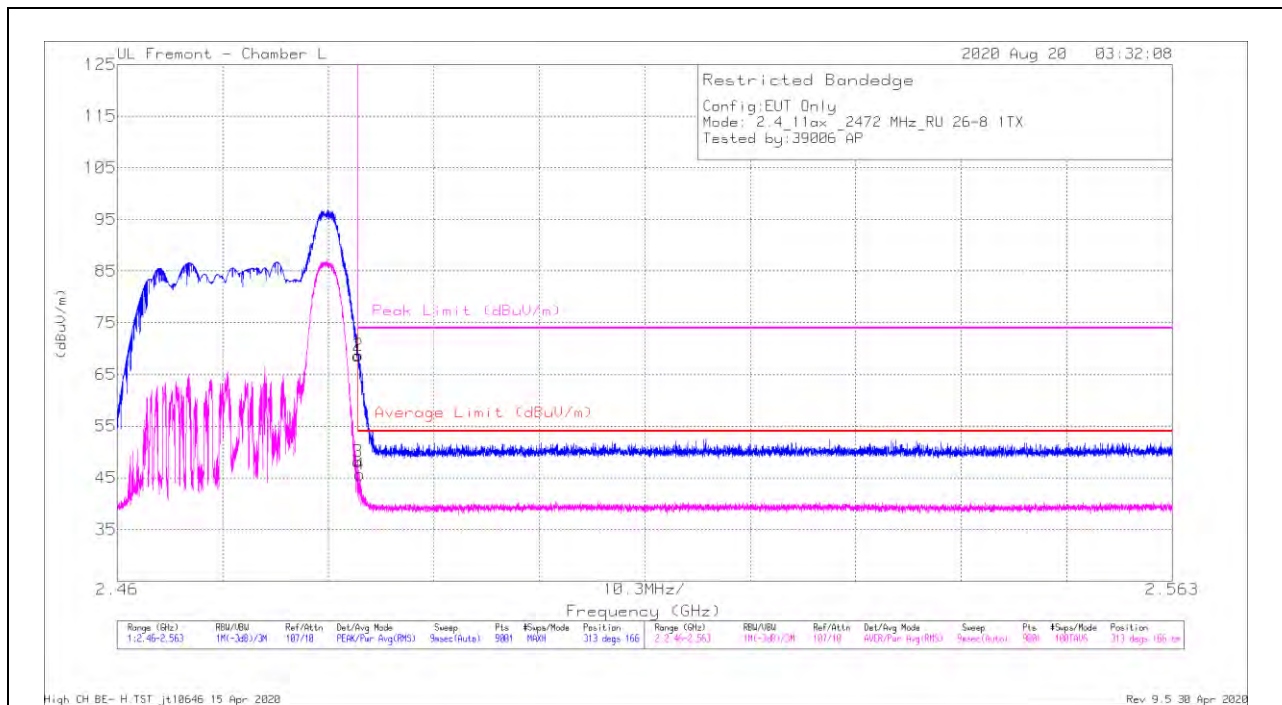

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	57.2	Pk	32.3	-20.9	68.6	-	-	74	-5.4	313	166	H
2	* 2.48353	57.32	Pk	32.3	-20.9	68.72	-	-	74	-5.28	313	166	H
3	* 2.48351	36.74	RMS	32.3	-20.9	48.14	54	-5.86	-	-	313	166	H
4	* 2.48365	34.24	RMS	32.3	-20.9	45.64	54	-8.36	-	-	313	166	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

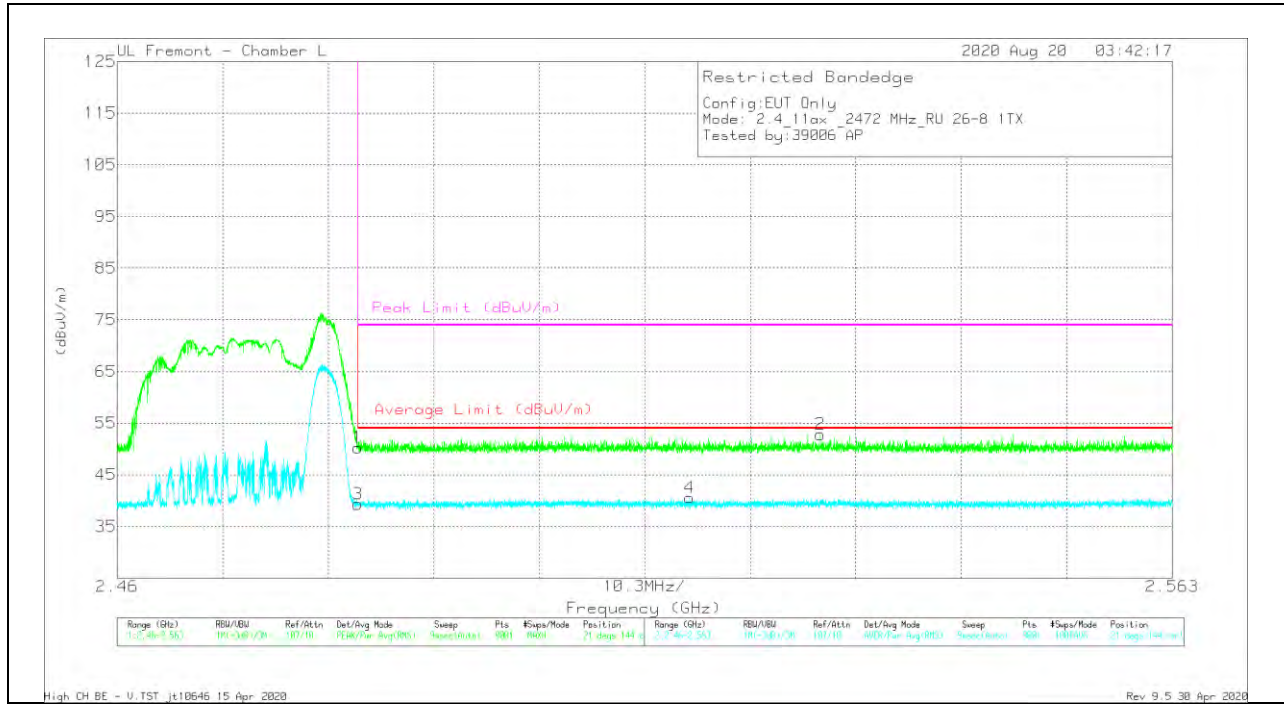


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Ctrl/Fitr/Paid (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	38.83	Pk	32.3	-20.9	50.23	-	-	74	-23.77	21	144	V
2	2.52863	41.22	Pk	32.4	-20.8	52.82	-	-	74	-21.18	21	144	V
3	* 2.48351	27.92	RMS	32.3	-20.9	39.32	54	-14.68	-	-	21	144	V
4	2.51588	29.06	RMS	32.4	-20.9	40.56	54	-13.44	-	-	21	144	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANT 4 MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

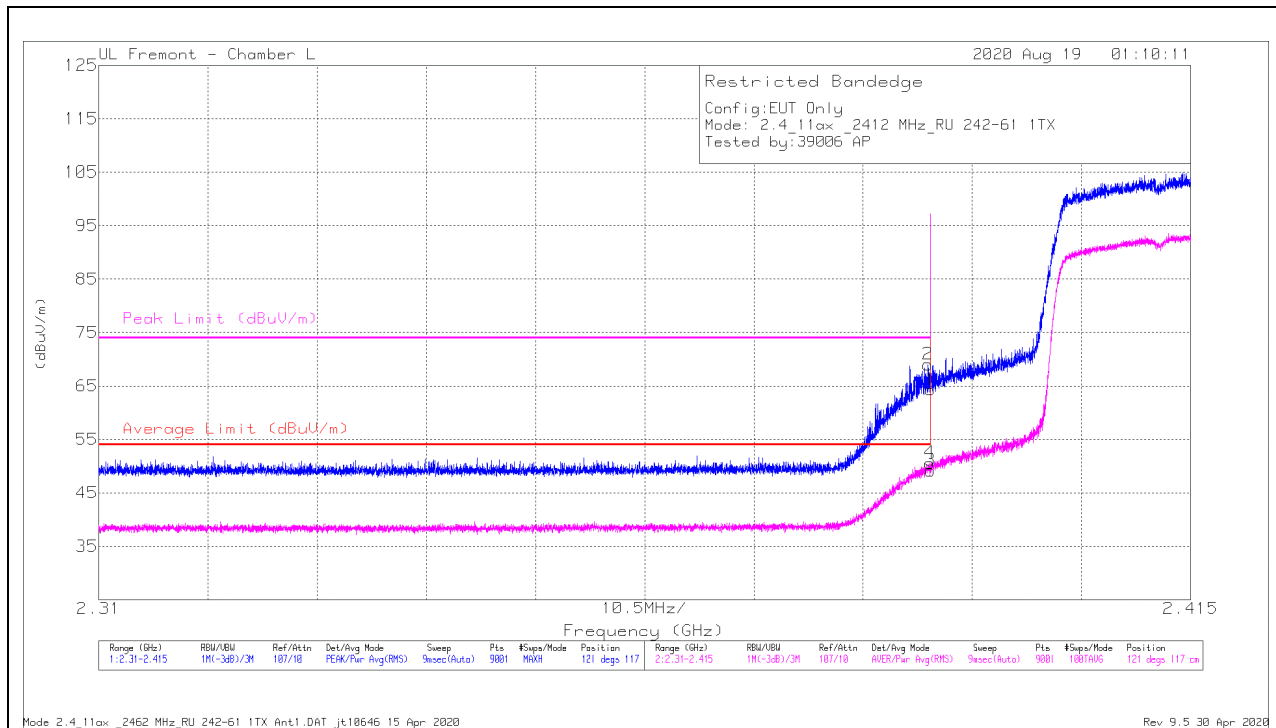

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbll/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	53.52	Pk	31.9	-21.1	64.32	-	-	74	-9.68	121	117	H
2	* 2.38971	58.22	Pk	31.9	-21.1	69.02	-	-	74	-4.98	121	117	H
3	* 2.38999	38.39	RMS	31.9	-21.1	49.19	54	-4.81	-	-	121	117	H
4	* 2.3899	39.81	RMS	31.9	-21.1	50.61	54	-3.39	-	-	121	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

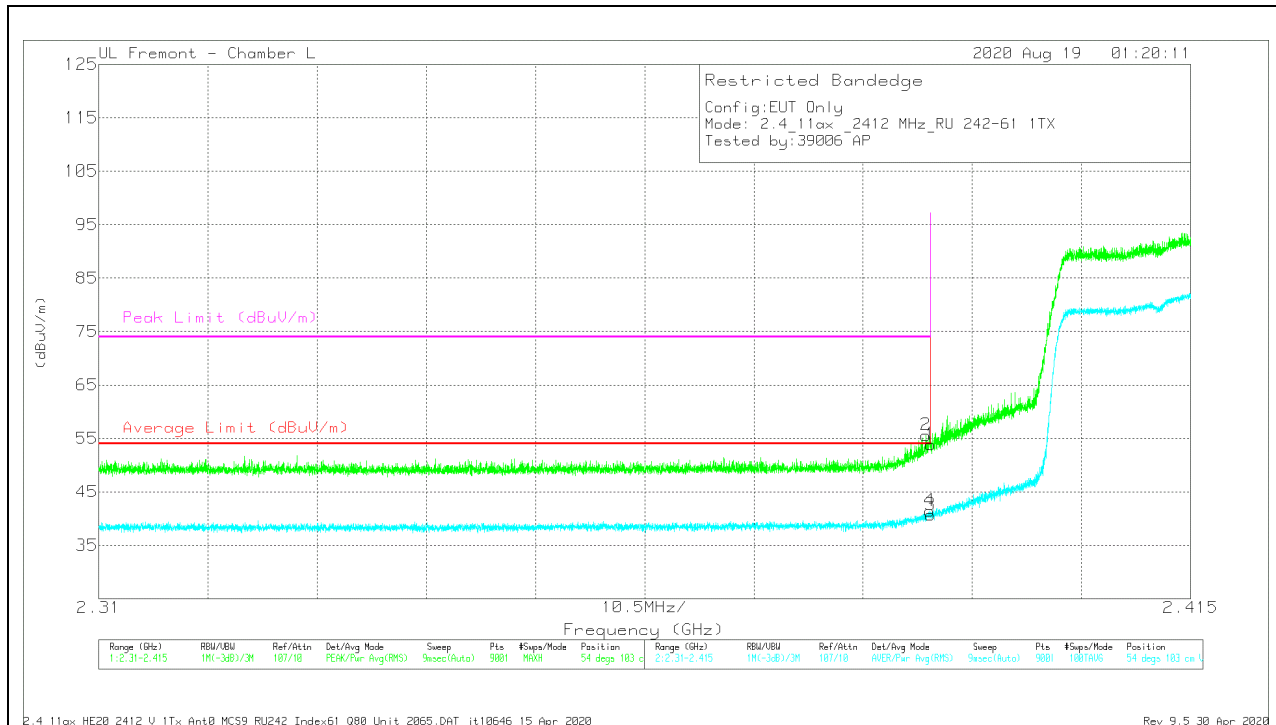


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	43.06	Pk	31.9	-21.1	53.86	-	-	74	-20.14	54	103	V
2	* 2.38956	44.82	Pk	31.9	-21.1	55.62	-	-	74	-18.38	54	103	V
3	* 2.38999	29.91	RMS	31.9	-21.1	40.71	54	-13.29	-	-	54	103	V
4	* 2.3899	30.66	RMS	31.9	-21.1	41.46	54	-12.54	-	-	54	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

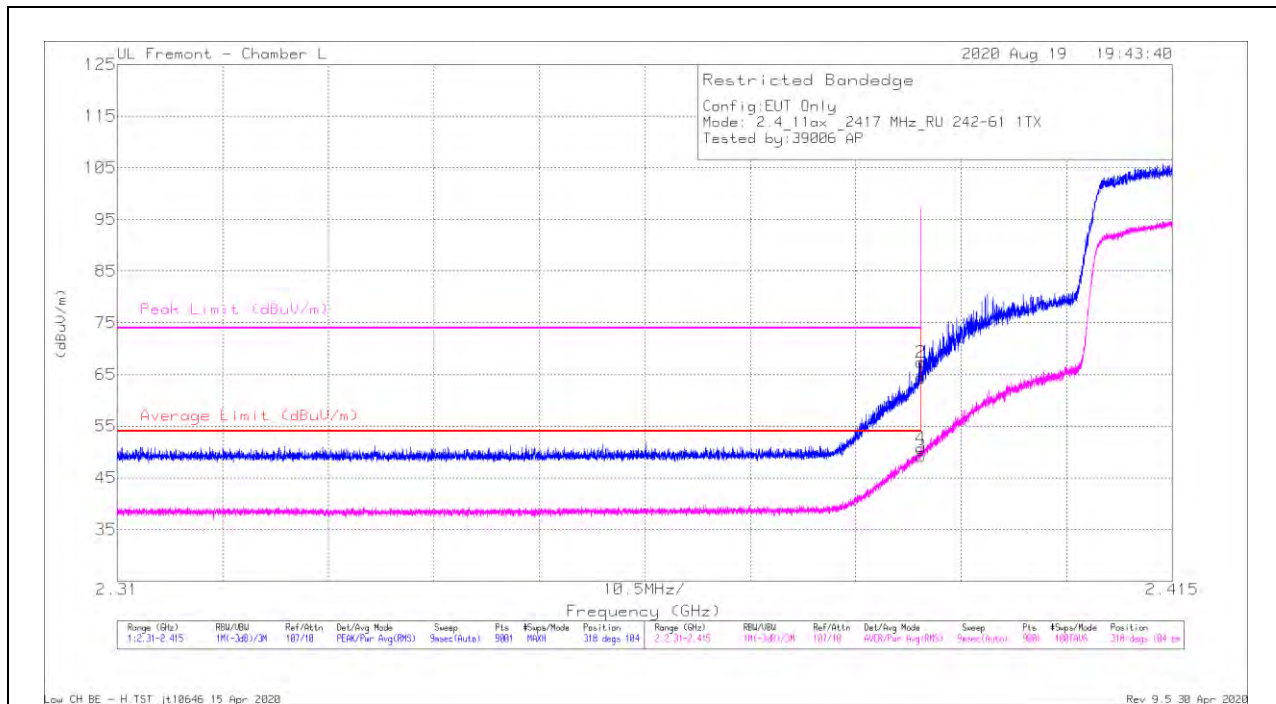

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbll/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	53.49	Pk	31.9	-21.1	64.29	-	-	74	-9.71	318	104	H
2	* 2.38997	56.55	Pk	31.9	-21.1	67.35	-	-	74	-6.65	318	104	H
3	* 2.38999	38.34	RMS	31.9	-21.1	49.14	54	-4.86	-	-	318	104	H
4	* 2.38998	39.91	RMS	31.9	-21.1	50.71	54	-3.29	-	-	318	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

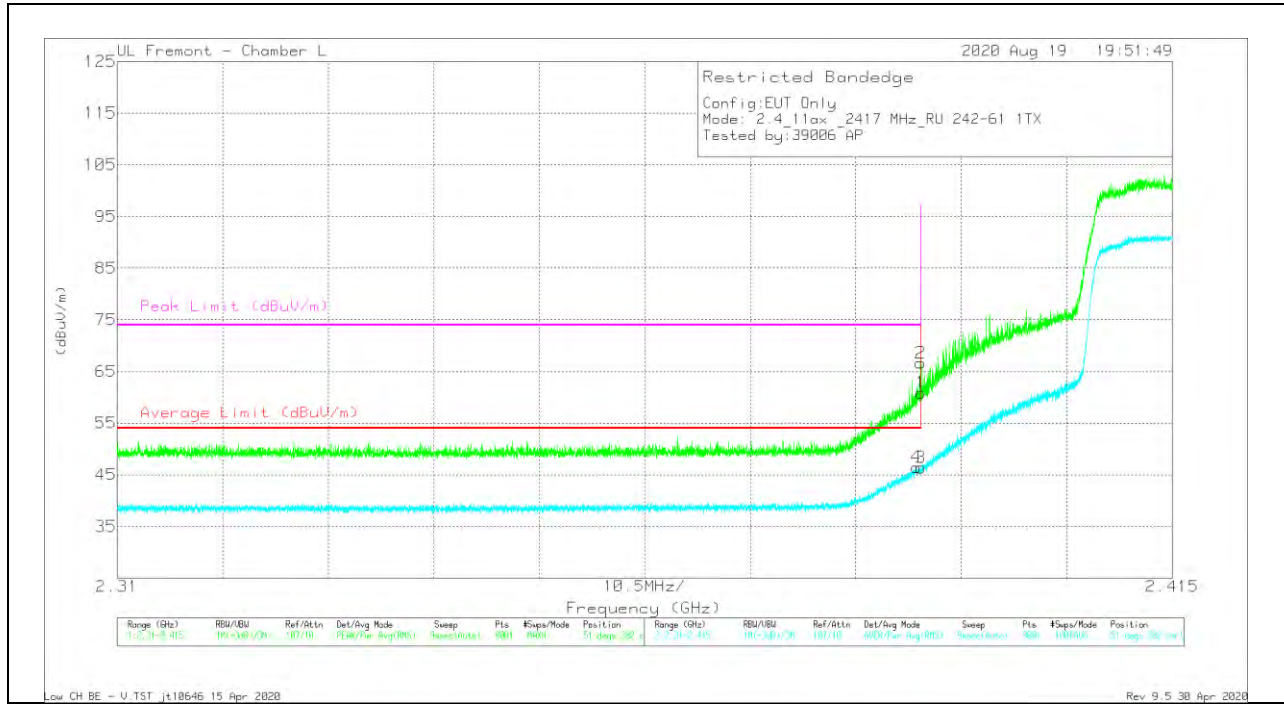


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fibr/Pa α (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	50.06	Pk	31.9	-21.1	60.86	-	-	74	-13.14	51	382	V
2	* 2.38994	55.82	Pk	31.9	-21.1	66.62	-	-	74	-7.38	51	382	V
3	* 2.38999	35.57	RMS	31.9	-21.1	46.37	54	-7.63	-	-	51	382	V
4	* 2.38955	35.68	RMS	31.9	-21.1	46.48	54	-7.52	-	-	51	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

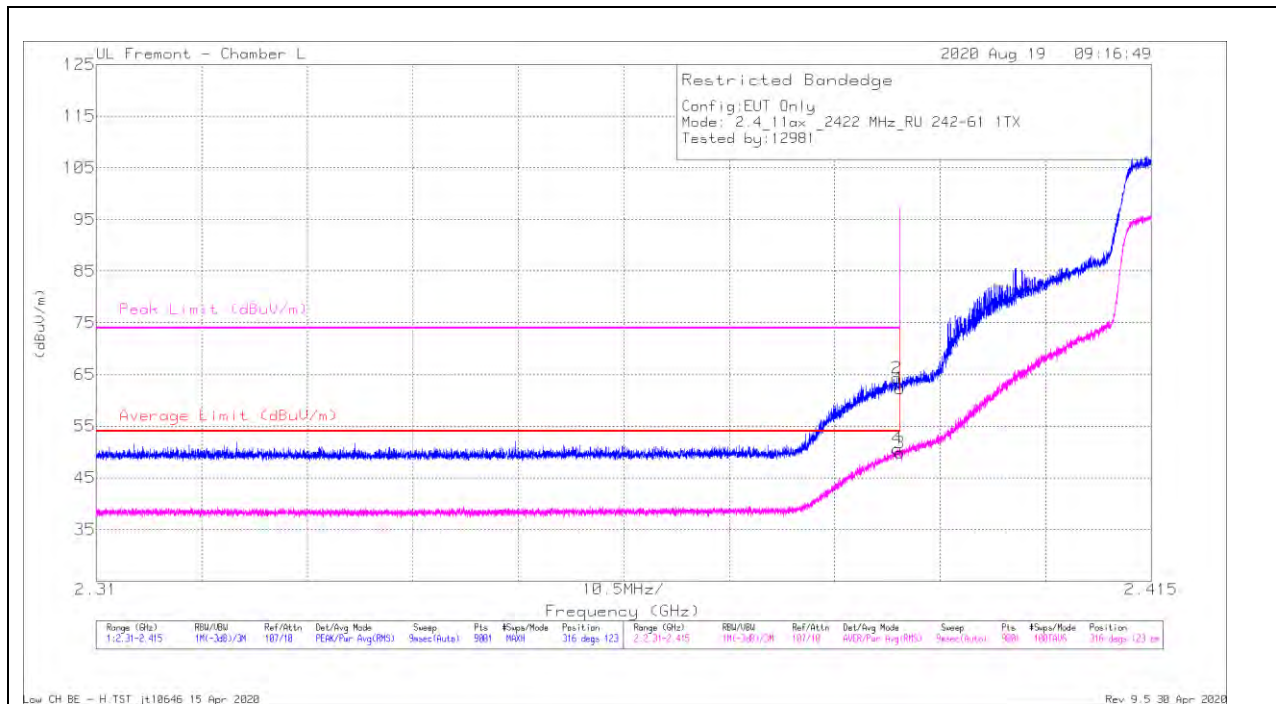

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbll/Ftr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	51.53	Pk	31.9	-21.1	62.33	-	-	74	-11.67	316	123	H
2	* 2.38966	53.52	Pk	31.9	-21.1	64.32	-	-	74	-9.68	316	123	H
3	* 2.38999	39.03	RMS	31.9	-21.1	49.83	54	-4.17	-	-	316	123	H
4	* 2.38971	39.82	RMS	31.9	-21.1	50.62	54	-3.38	-	-	316	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

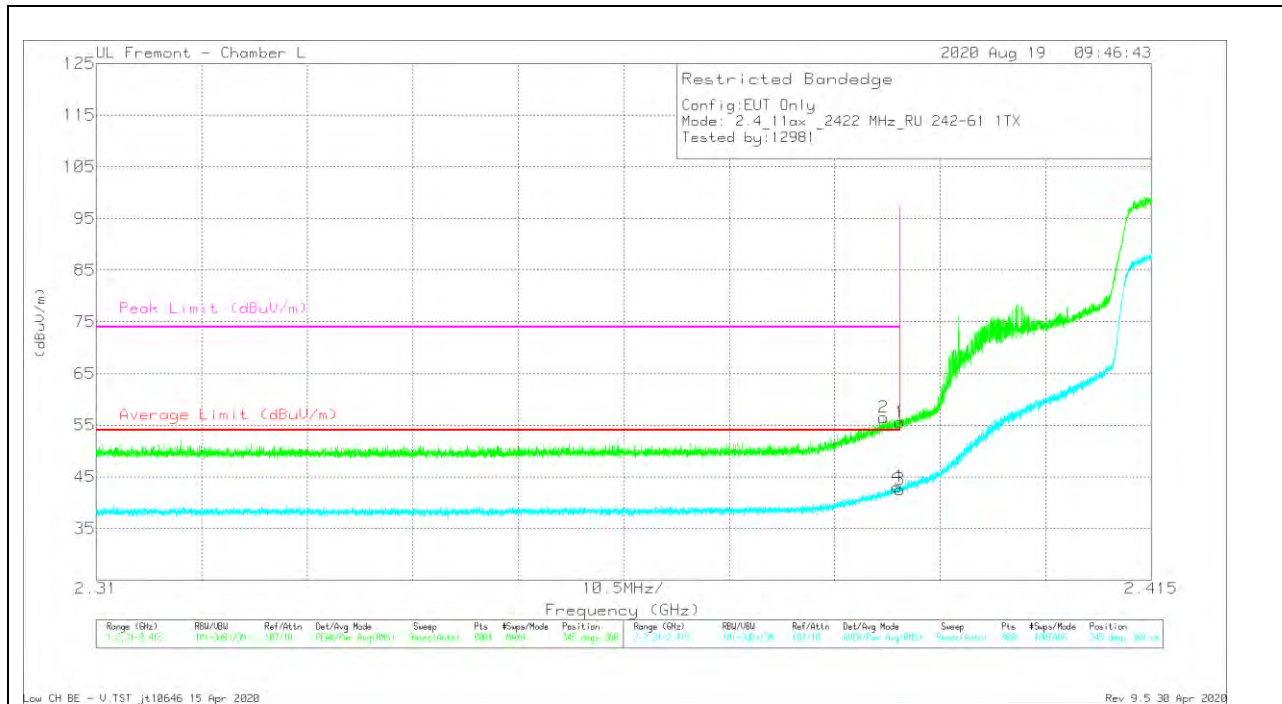


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	44.7	Pk	31.9	-21.1	55.5	-	-	74	-18.5	345	360	V
2	* 2.38833	45.68	Pk	31.9	-21.1	56.48	-	-	74	-17.52	345	360	V
3	* 2.38999	31.75	RMS	31.9	-21.1	42.55	54	-11.45	-	-	345	360	V
4	* 2.3897	32.26	RMS	31.9	-21.1	43.06	54	-10.94	-	-	345	360	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

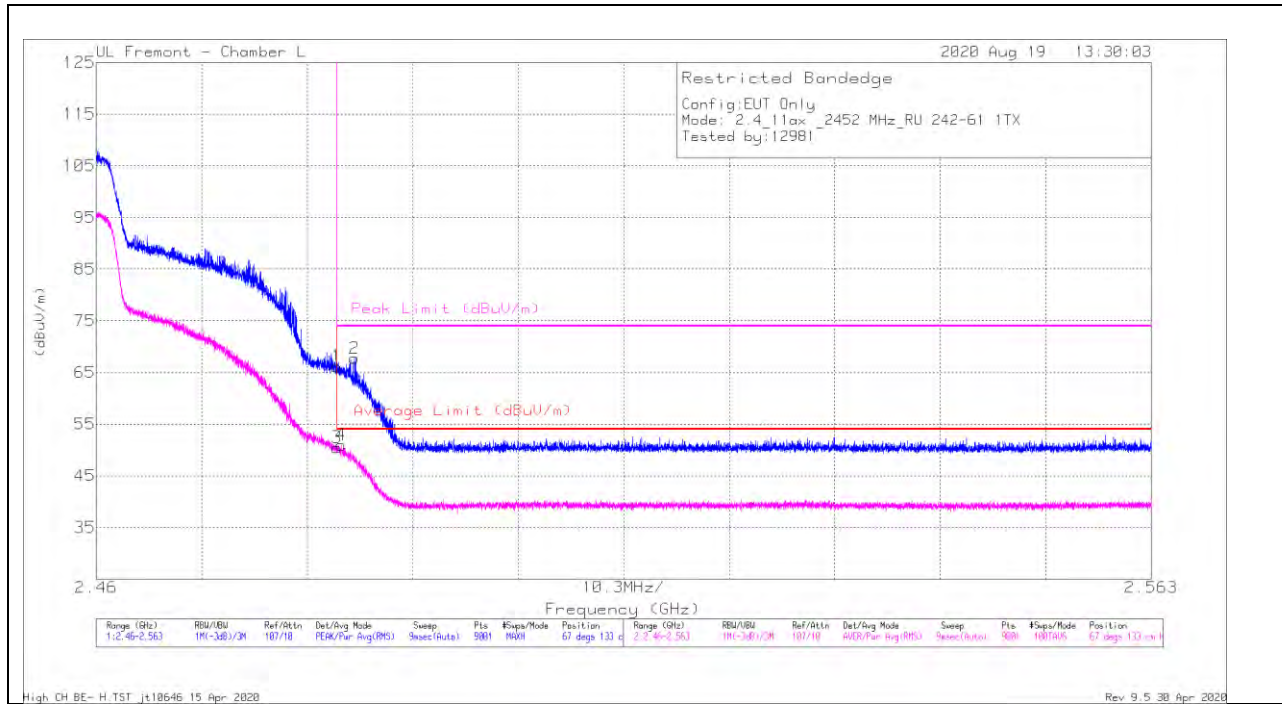

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	54.81	Pk	32.3	-20.9	66.21	-	-	74	-7.79	67	133	H
2	* 2.48522	56.32	Pk	32.3	-20.9	67.72	-	-	74	-6.28	67	133	H
3	* 2.48351	39.06	RMS	32.3	-20.9	50.46	54	-3.54	-	-	67	133	H
4	* 2.4839	39.57	RMS	32.3	-20.9	50.97	54	-3.03	-	-	67	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

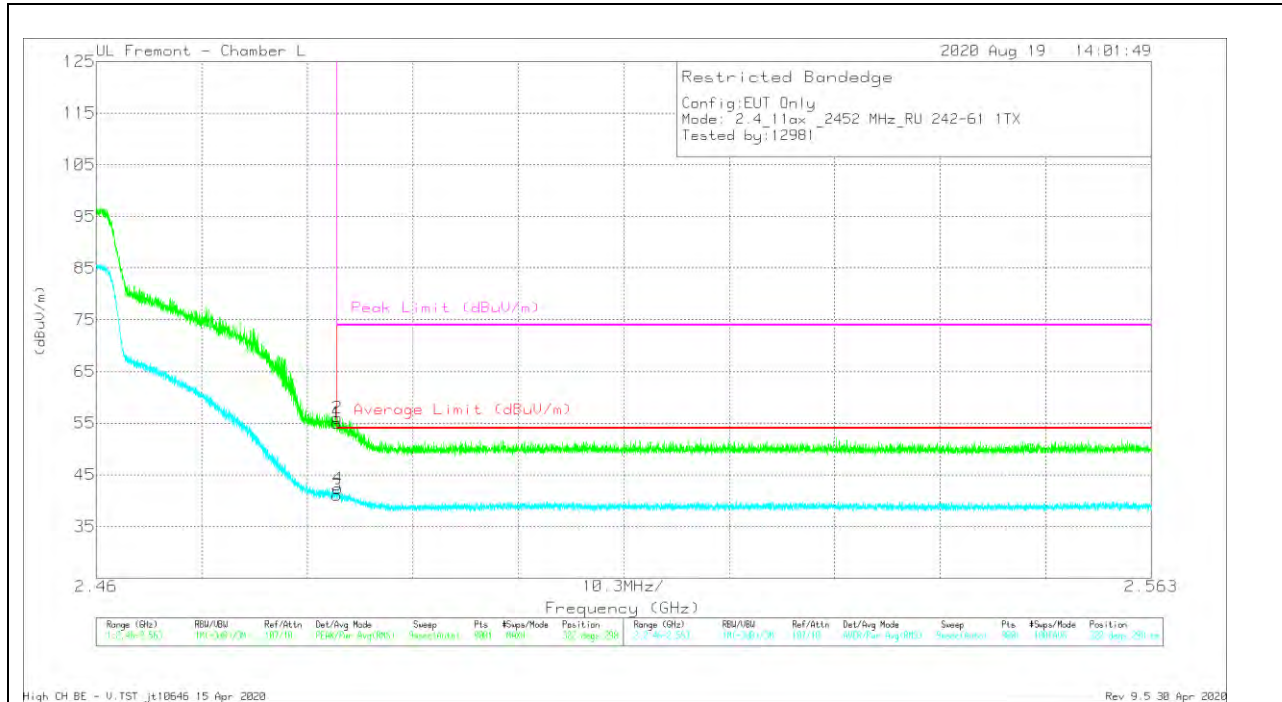


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Ctrl/Filt/Paid (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	43.62	Pk	32.3	-20.9	55.02	-	-	74	-18.98	322	298	V
2	*2.48354	44.6	Pk	32.3	-20.9	56	-	-	74	-18	322	298	V
3	*2.48351	29.67	RMS	32.3	-20.9	41.07	54	-12.93	-	-	322	298	V
4	*2.4836	30.99	RMS	32.3	-20.9	42.39	54	-11.61	-	-	322	298	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

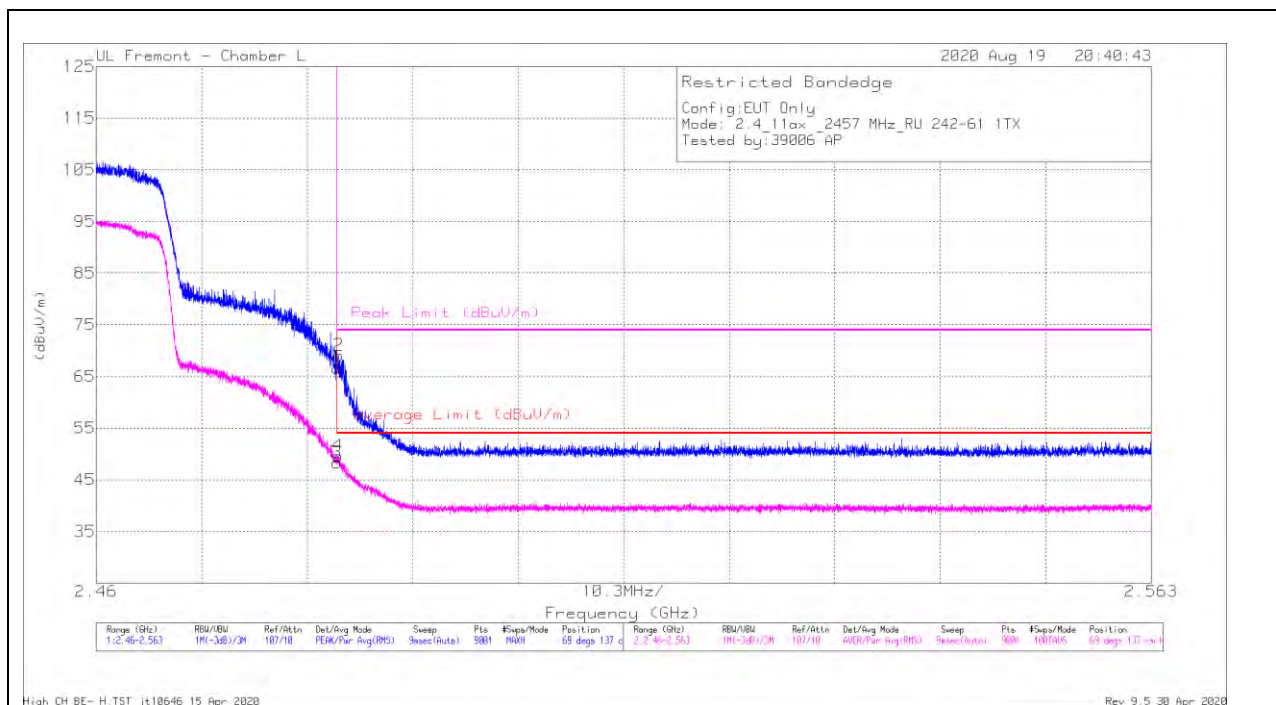

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.31	Pk	32.3	-20.9	66.71	-	-	74	-7.29	69	137	H
2	* 2.48367	57.7	Pk	32.3	-20.9	69.1	-	-	74	-4.9	69	137	H
3	* 2.48351	36.9	RMS	32.3	-20.9	48.3	54	-5.7	-	-	69	137	H
4	* 2.48357	38.25	RMS	32.3	-20.9	49.65	54	-4.35	-	-	69	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

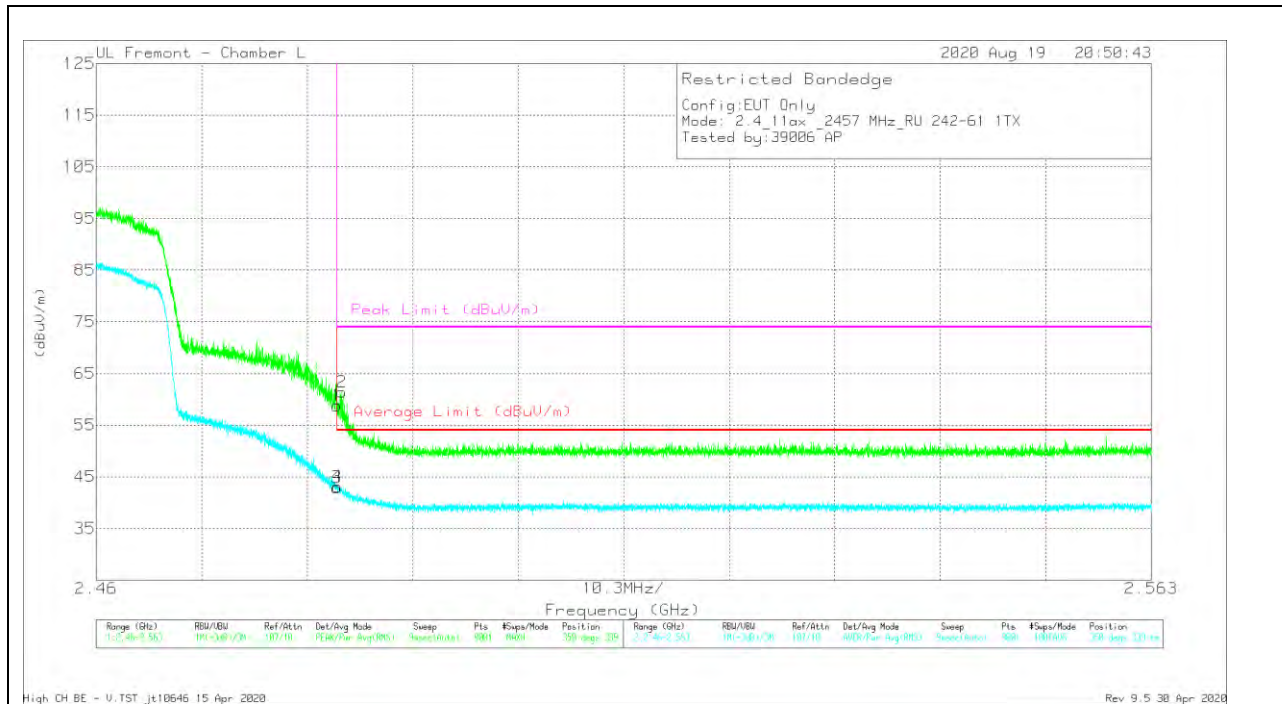


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	47.39	Pk	32.3	-20.9	58.79	-	-	74	-15.21	350	339	V
2	* 2.48399	50	Pk	32.3	-20.9	61.4	-	-	74	-12.6	350	339	V
3	* 2.48351	31.53	RMS	32.3	-20.9	42.93	54	-11.07	-	-	350	339	V
4	* 2.48353	31.69	RMS	32.3	-20.9	43.09	54	-10.91	-	-	350	339	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

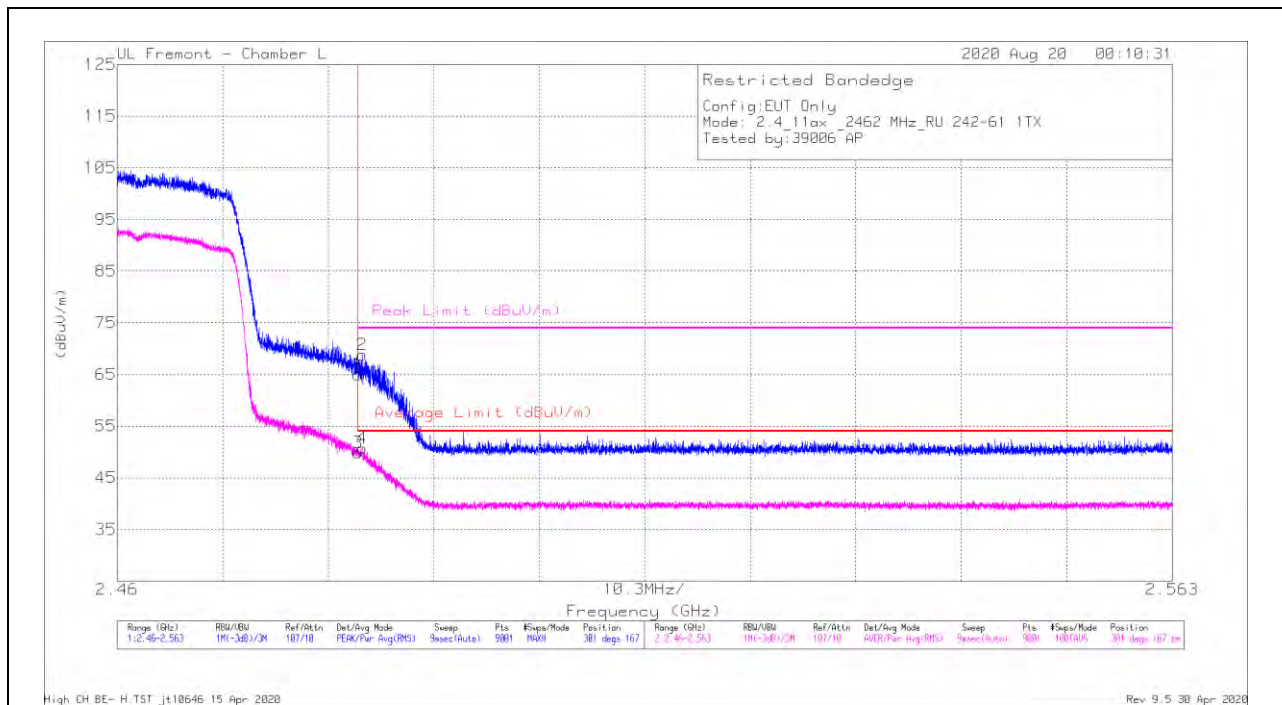

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.61	Pk	32.3	-20.9	65.01	-	-	74	-8.99	301	167	H
2	* 2.48392	57.39	Pk	32.3	-20.9	68.79	-	-	74	-5.21	301	167	H
3	* 2.48351	38.44	RMS	32.3	-20.9	49.84	54	-4.16	-	-	301	167	H
4	* 2.48391	39.28	RMS	32.3	-20.9	50.68	54	-3.32	-	-	301	167	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

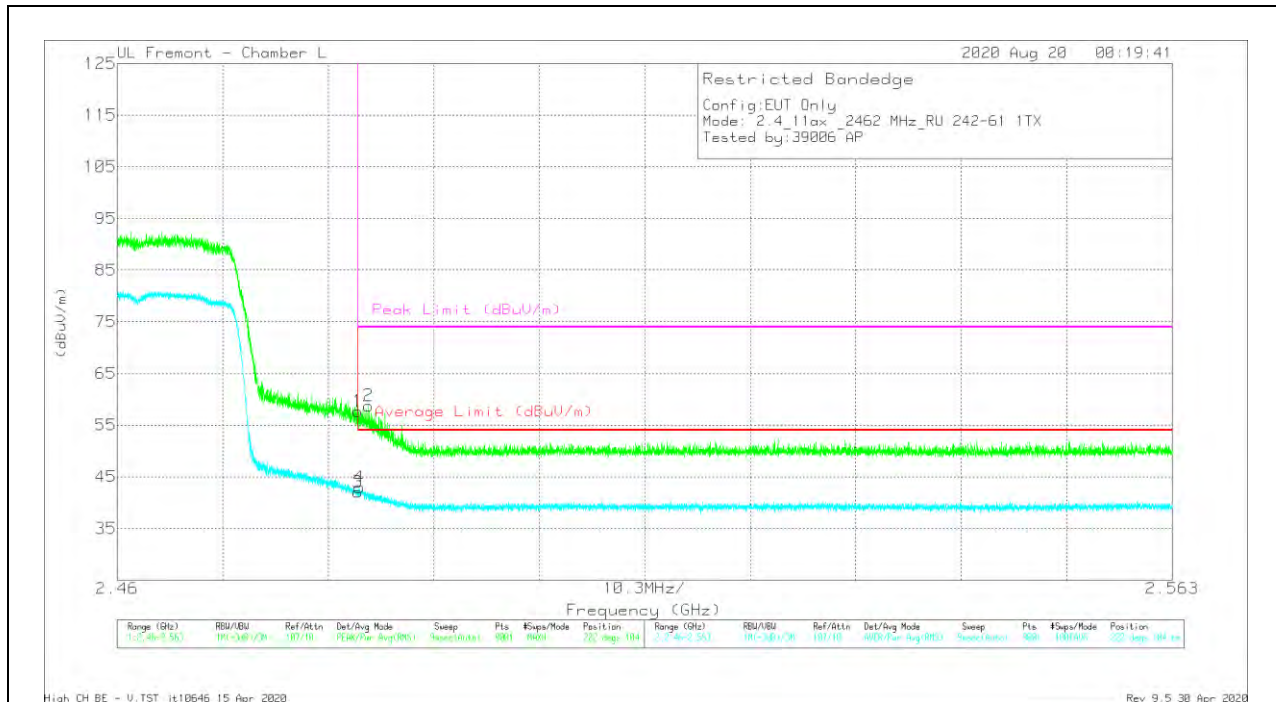


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Ctrl/Filt/Par/d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	46.26	Pk	32.3	-20.9	57.66	-	-	74	-16.34	222	104	V
2	*2.48455	47.37	Pk	32.3	-20.9	58.77	-	-	74	-15.23	222	104	V
3	*2.48351	30.61	RMS	32.3	-20.9	42.01	54	-11.99	-	-	222	104	V
4	*2.48363	31.56	RMS	32.3	-20.9	42.96	54	-11.04	-	-	222	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

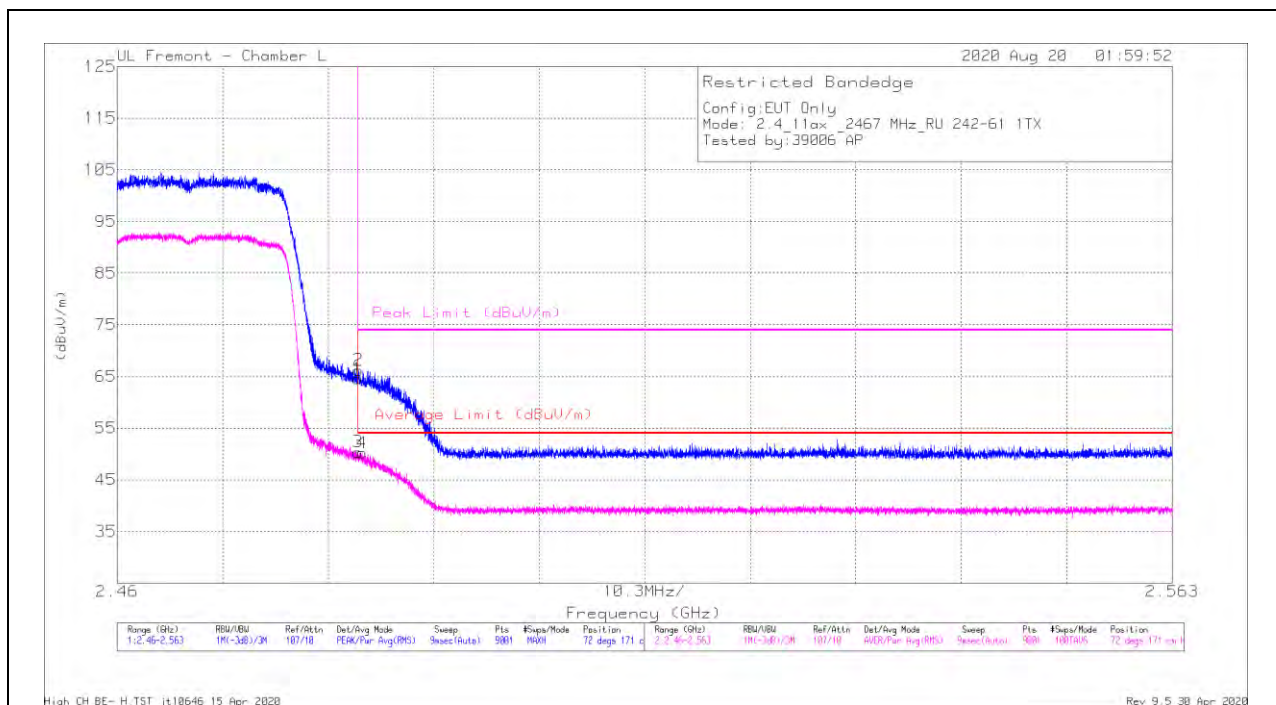


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.17	Pk	32.3	-20.9	64.57	-	-	74	-9.43	72	171	H
2	* 2.48356	54.8	Pk	32.3	-20.9	66.2	-	-	74	-7.8	72	171	H
3	* 2.48351	38.98	RMS	32.3	-20.9	50.38	54	-3.62	-	-	72	171	H
4	* 2.4839	38.8	RMS	32.3	-20.9	50.2	54	-3.8	-	-	72	171	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

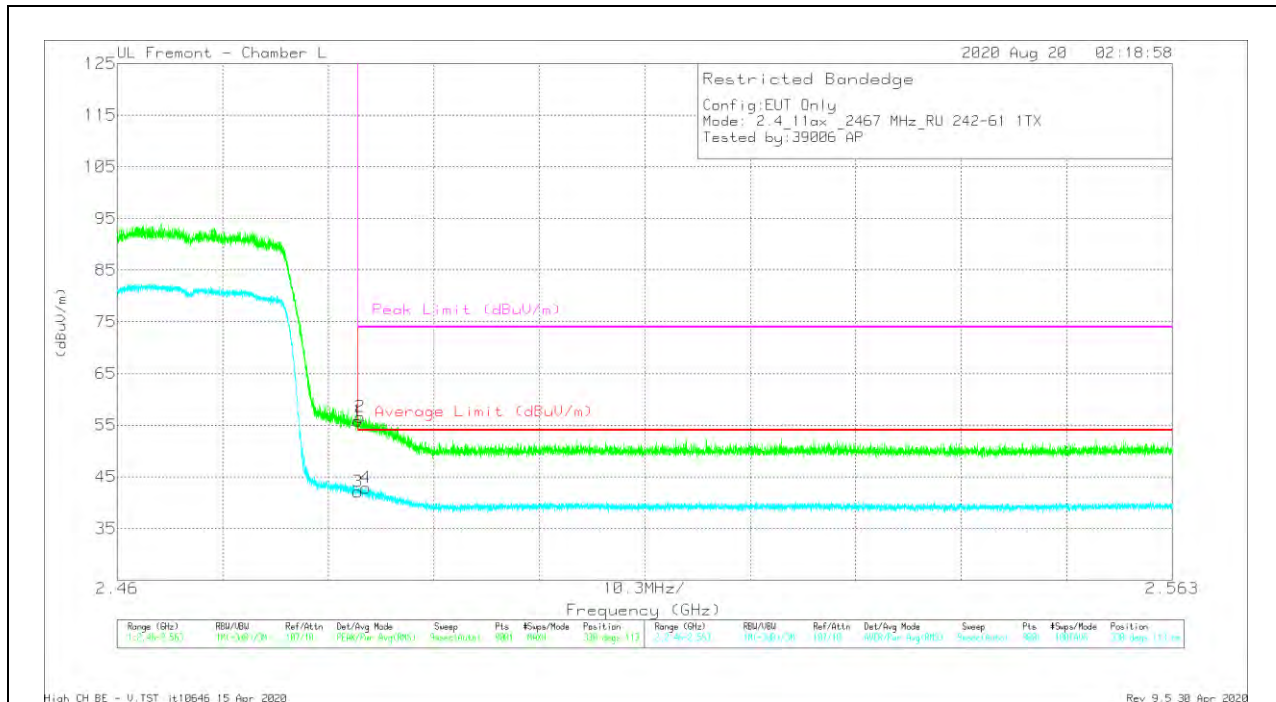


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Ctrl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.48351	44.37	Pk	32.3	-20.9	55.77	-	-	74	-18.23	330	113	V
2	*2.48373	45.19	Pk	32.3	-20.9	56.59	-	-	74	-17.41	330	113	V
3	*2.48351	30.72	RMS	32.3	-20.9	42.12	54	-11.88	-	-	330	113	V
4	*2.4843	31.45	RMS	32.3	-20.9	42.85	54	-11.15	-	-	330	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

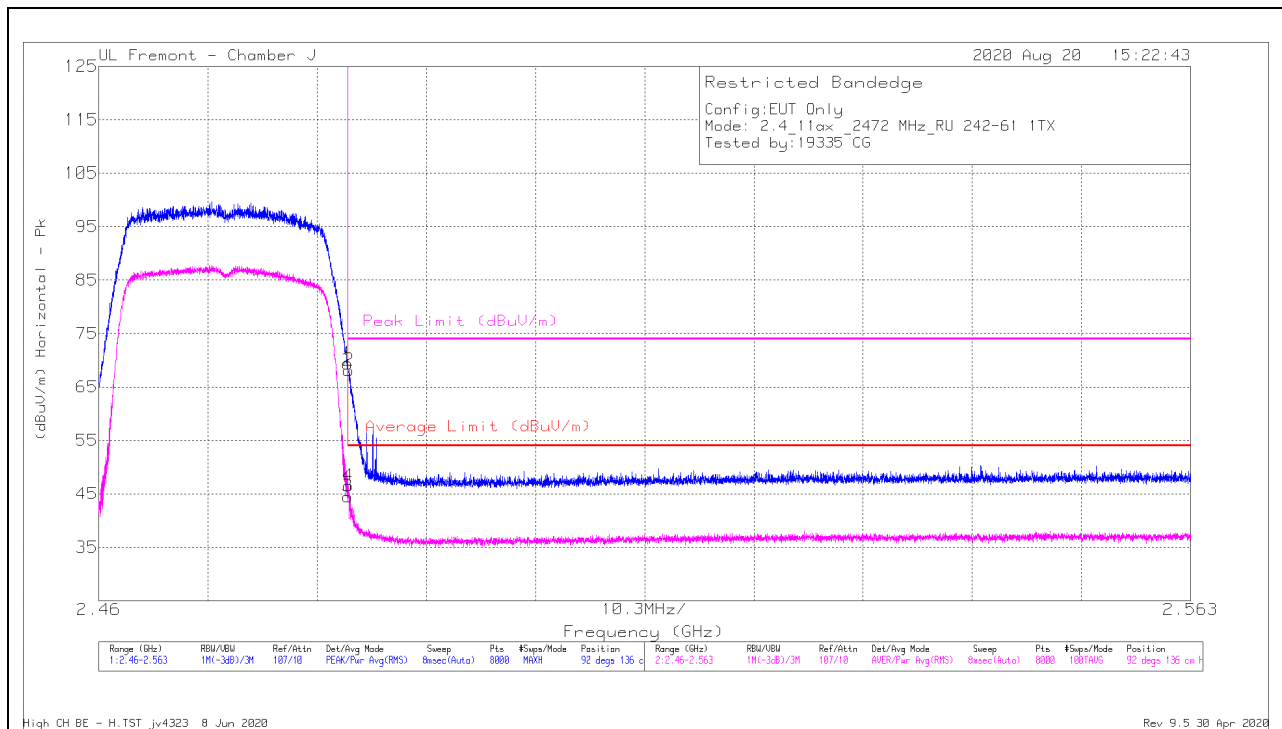

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.1	Pk	29.5	-14.2	69.4	-	-	74	-4.6	92	136	H
2	* 2.48358	52.82	Pk	29.5	-14.2	68.12	-	-	74	-5.88	92	136	H
3	* 2.4835	29.23	RMS	29.5	-14.2	44.53	54	-9.47	-	-	92	136	H
4	* 2.48354	31.23	RMS	29.5	-14.2	46.53	54	-7.47	-	-	92	136	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

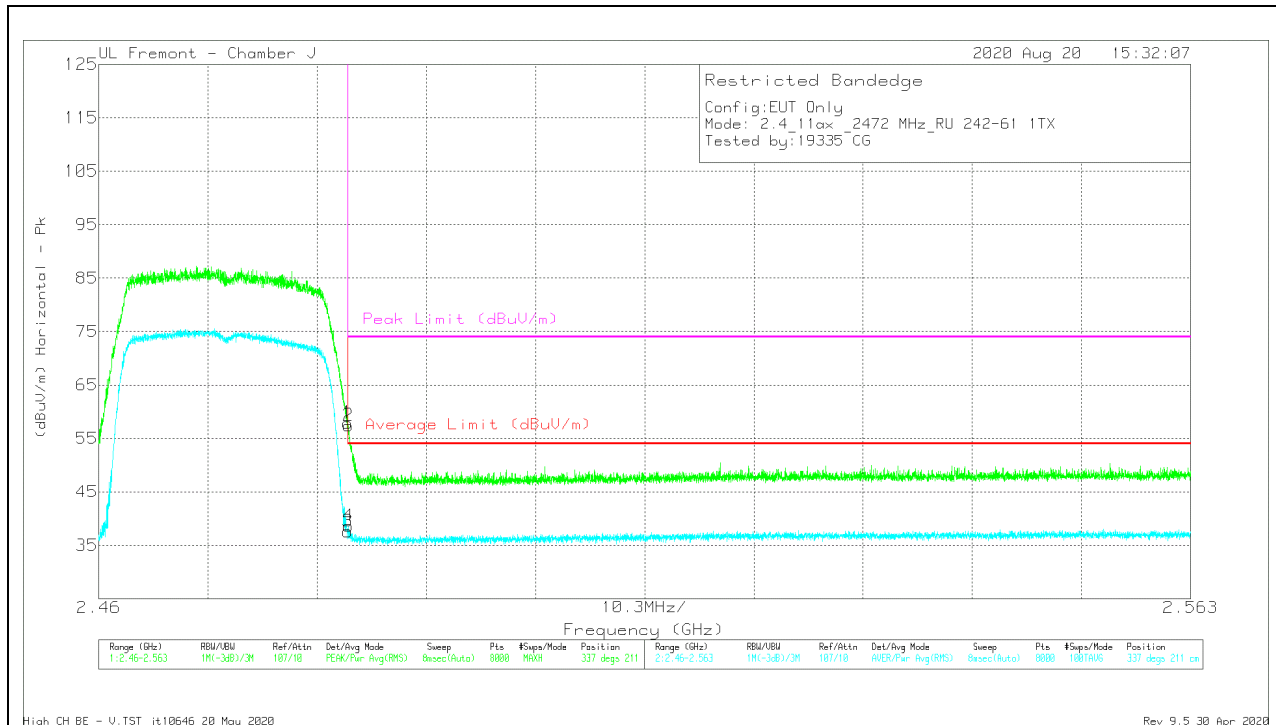


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.62	Pk	29.5	-14.2	57.92	-	-	74	-16.08	337	211	V
2	* 2.48354	42.09	Pk	29.5	-14.2	57.39	-	-	74	-16.61	337	211	V
3	* 2.4835	22.31	RMS	29.5	-14.2	37.61	54	-16.39	-	-	337	211	V
4	* 2.48353	23.3	RMS	29.5	-14.2	38.6	54	-15.4	-	-	337	211	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANT 3 MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

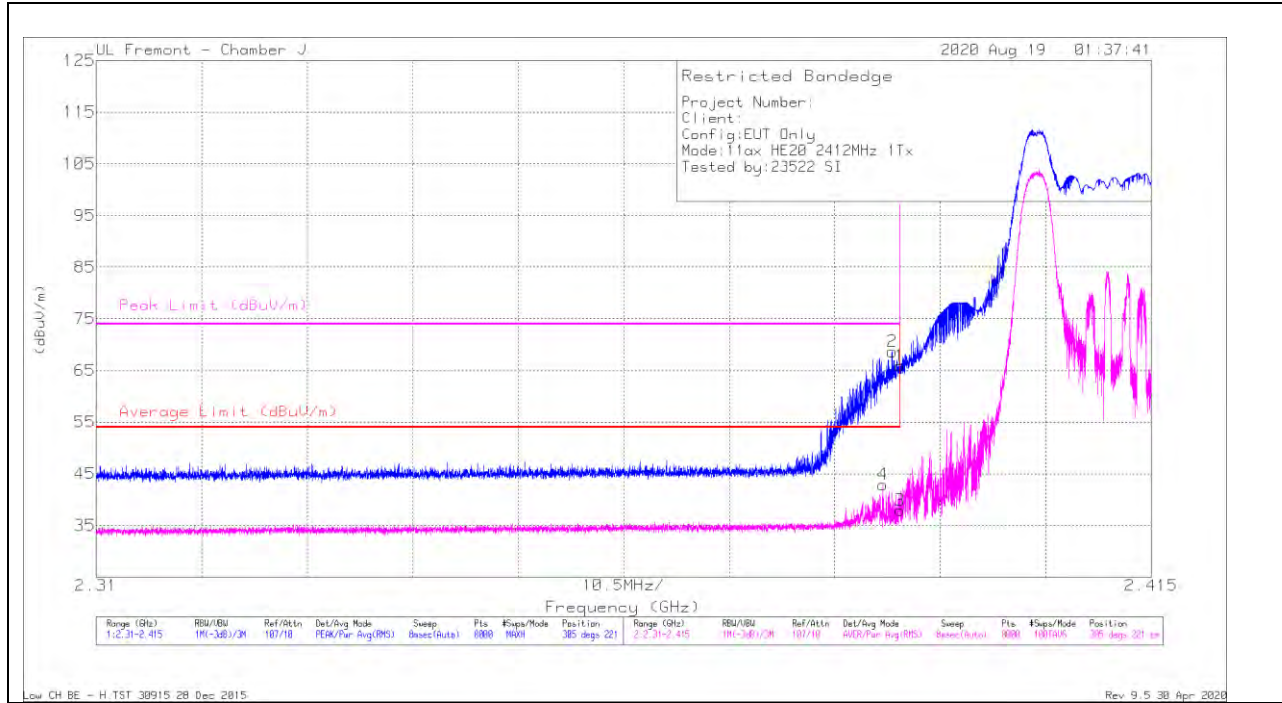

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Dege)	Height (cm)	Polarity
1	* 2.39	51.6	Pk	29	-14.7	65.9	-	-	74	-8.1	305	221	H
2	* 2.38922	54.36	Pk	29	-14.7	68.66	-	-	74	-5.34	305	221	H
3	* 2.39	23.61	RMS	29	-14.7	37.91	54	-16.09	-	-	305	221	H
4	* 2.38828	28.61	RMS	29	-14.7	42.91	54	-11.09	-	-	305	221	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

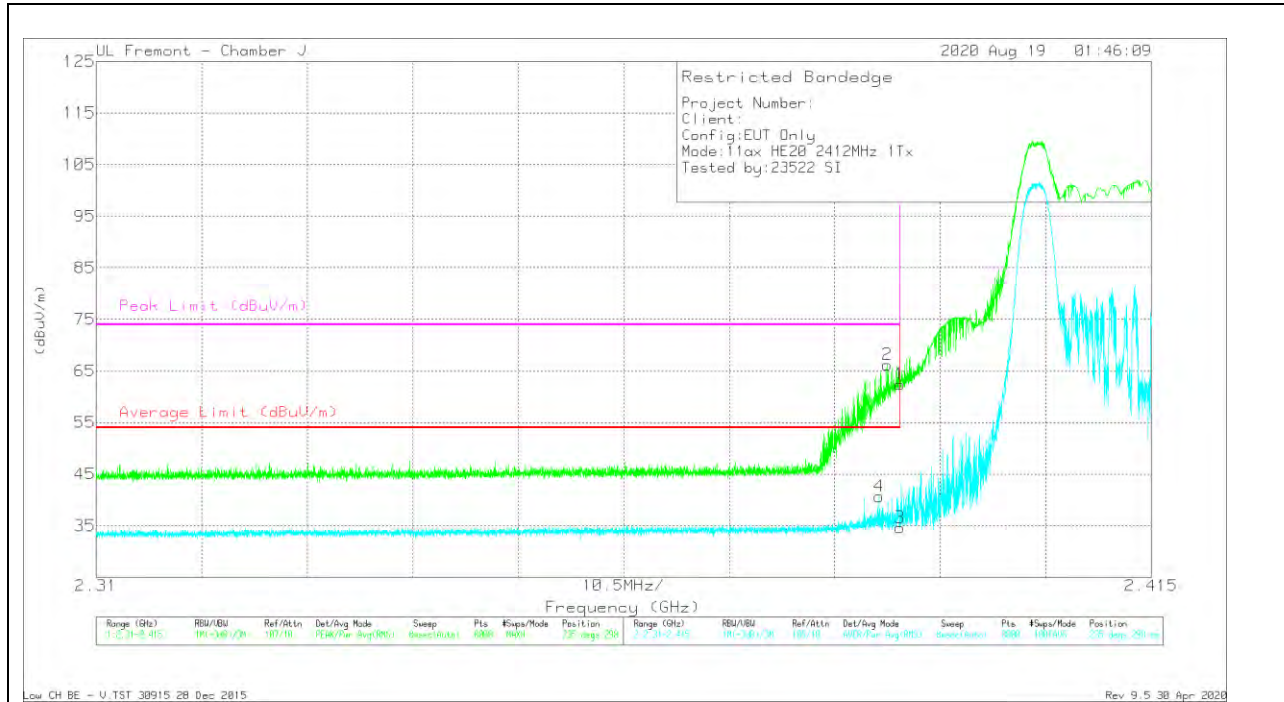


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.14	Pk	29	-14.7	62.44	-	-	74	-11.56	235	298	V
2	* 2.38874	51.91	Pk	29	-14.7	66.21	-	-	74	-7.79	235	298	V
3	* 2.39	20.32	RMS	29	-14.7	34.62	54	-19.38	-	-	235	298	V
4	* 2.38794	26.36	RMS	29	-14.7	40.66	54	-13.34	-	-	235	298	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

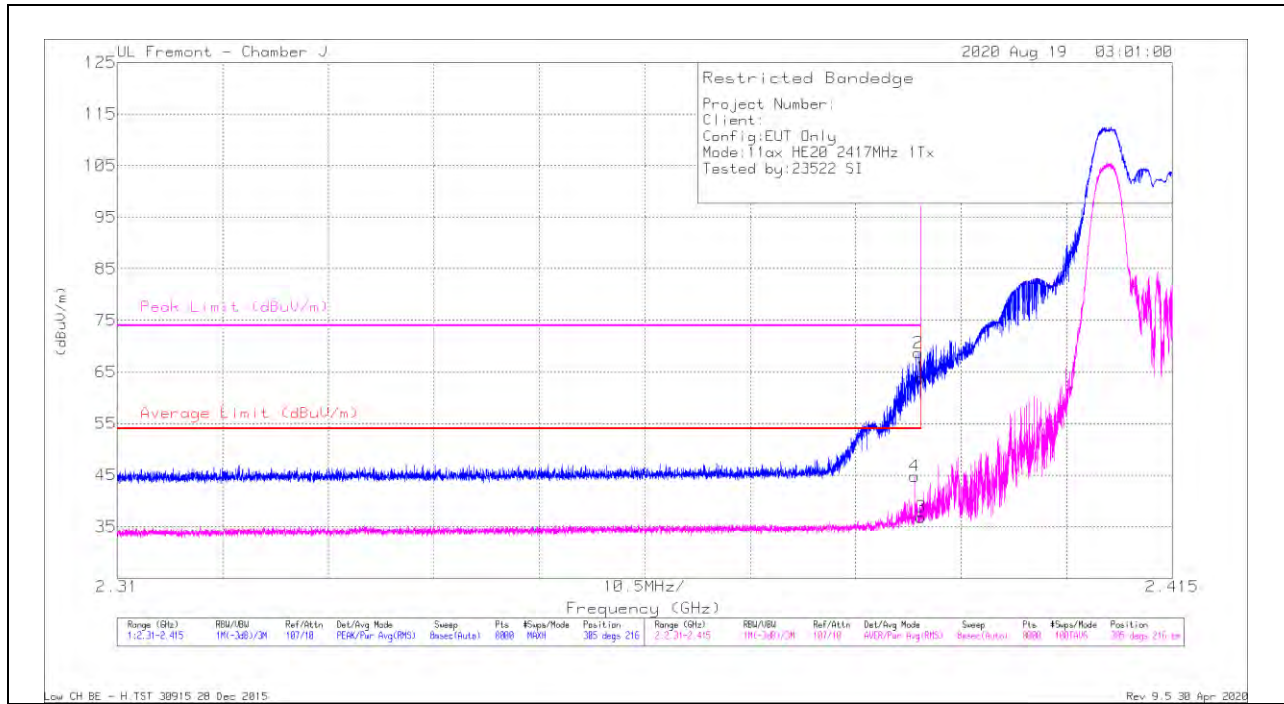

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.6	Pk	29	-14.7	63.9	-	-	74	-10.1	305	216	H
2	* 2.38972	54.4	Pk	29	-14.7	68.7	-	-	74	-5.3	305	216	H
3	* 2.39	22.55	RMS	29	-14.7	36.85	54	-17.15	-	-	305	216	H
4	* 2.38935	30.47	RMS	29	-14.7	44.77	54	-9.23	-	-	305	216	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

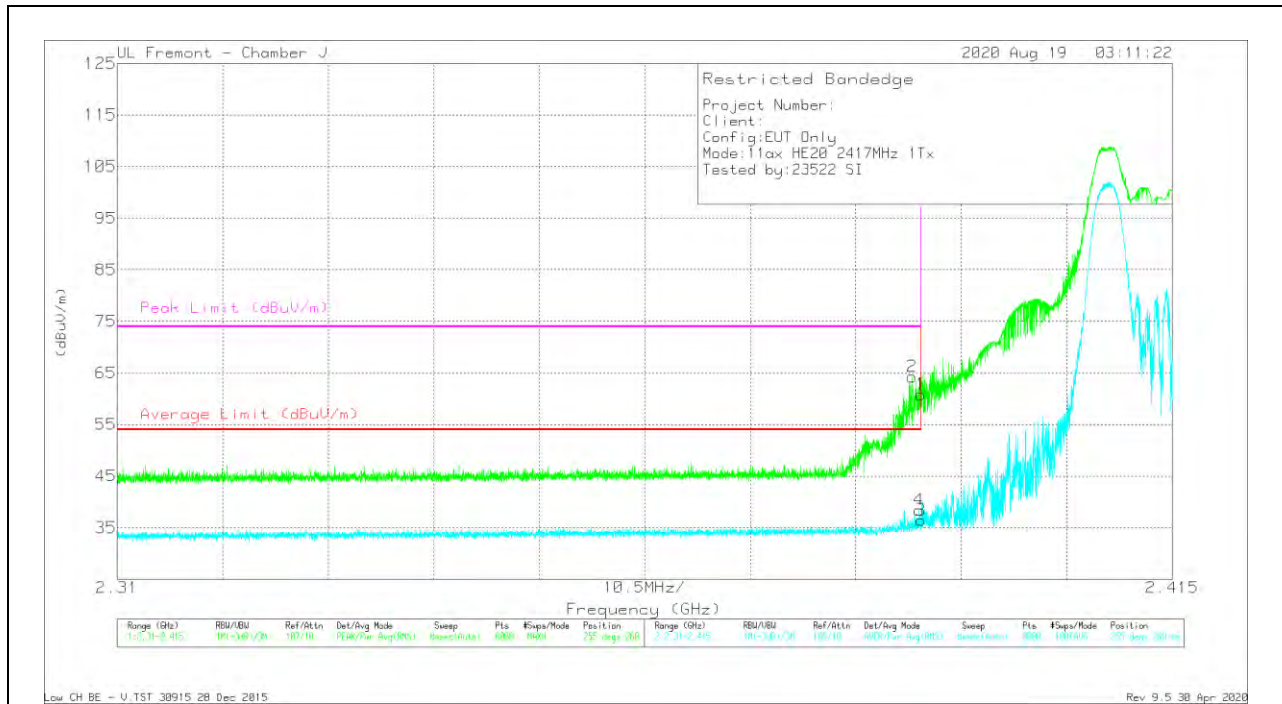


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Fitr/Paid (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	46.54	Pk	29	-14.7	60.84	-	-	74	-13.16	255	260	V
2	* 2.3891	49.97	Pk	29	-14.7	64.27	-	-	74	-9.73	255	260	V
3	* 2.39	22.14	RMS	29	-14.7	36.44	54	-17.56	-	-	255	260	V
4	* 2.38981	24.14	RMS	29	-14.7	38.44	54	-15.56	-	-	255	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

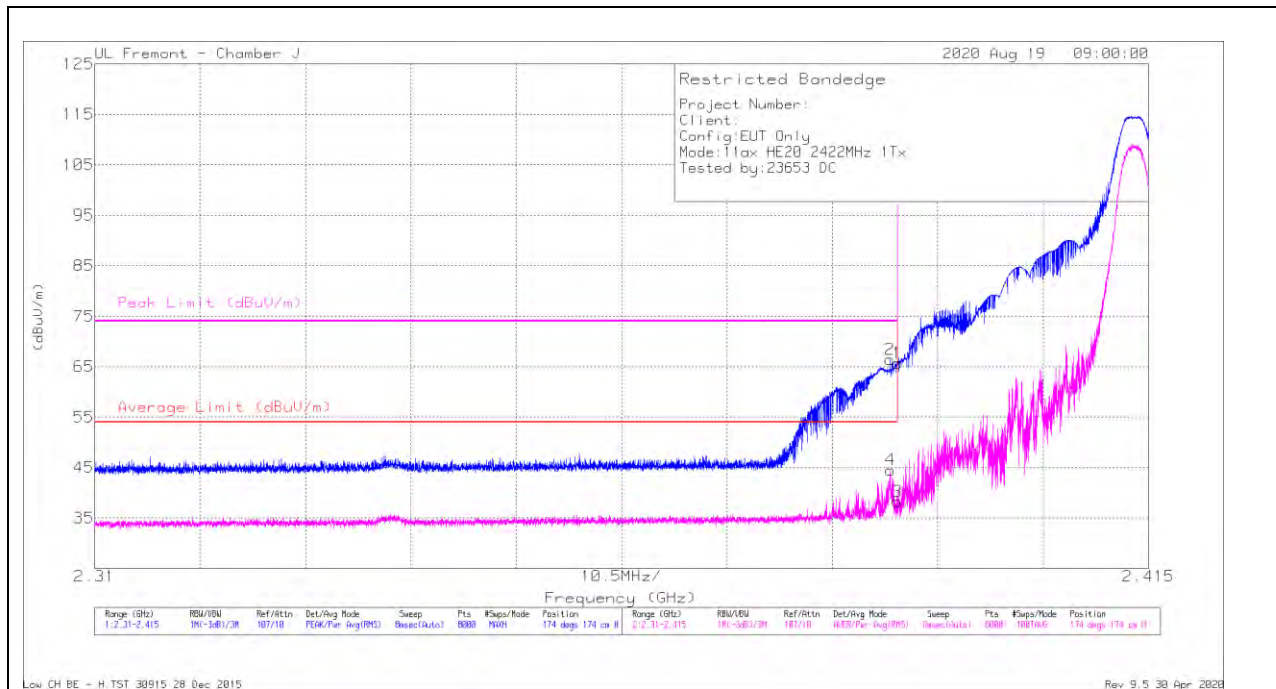

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/CbW/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	51.41	Pk	29	-14.7	65.71	-	-	74	-8.29	174	174	H
2	* 2.36923	52.1	Pk	29	-14.7	66.4	-	-	74	-7.6	174	174	H
3	* 2.39	23.94	RMS	29	-14.7	38.24	54	-15.76	-	-	174	174	H
4	* 2.3893	30.22	RMS	29	-14.7	44.52	54	-9.48	-	-	174	174	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

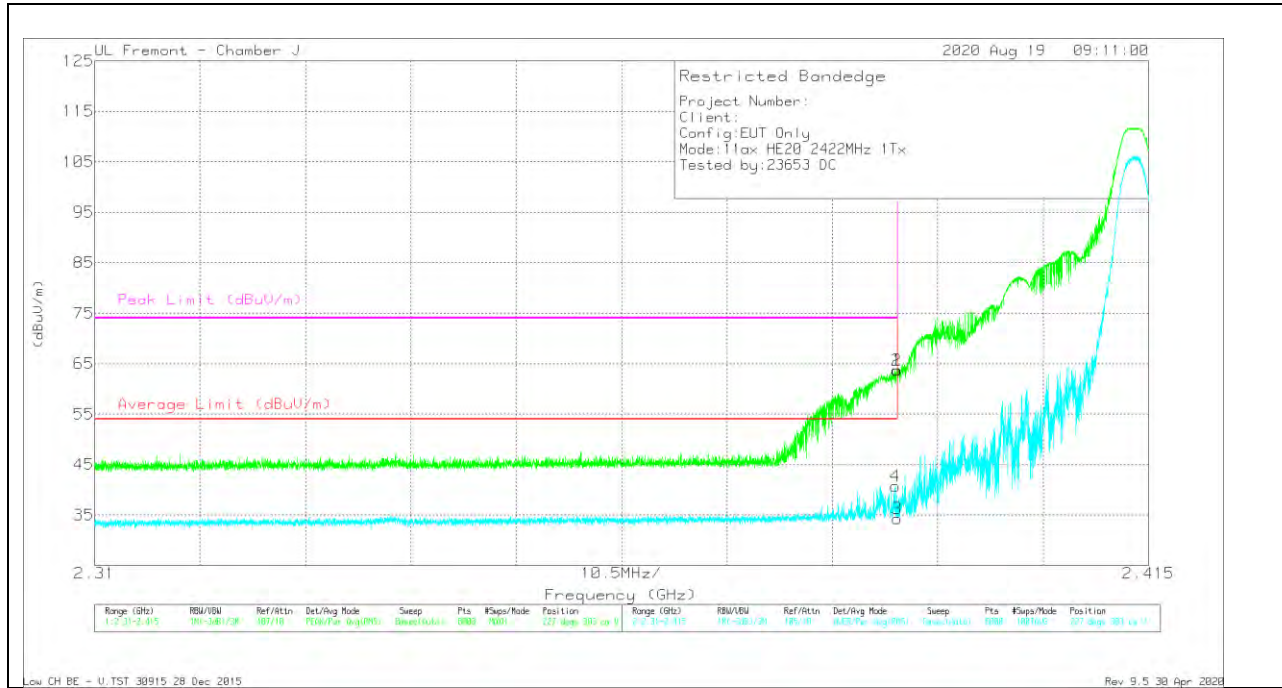


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.45	Pk	29	-14.7	63.75	-	-	74	-10.25	227	303	V
2	* 2.38993	49.42	Pk	29	-14.7	63.72	-	-	74	-10.28	227	303	V
3	* 2.39	19.99	RMS	29	-14.7	34.29	54	-19.71	-	-	227	303	V
4	* 2.38977	26.48	RMS	29	-14.7	40.78	54	-13.22	-	-	227	303	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

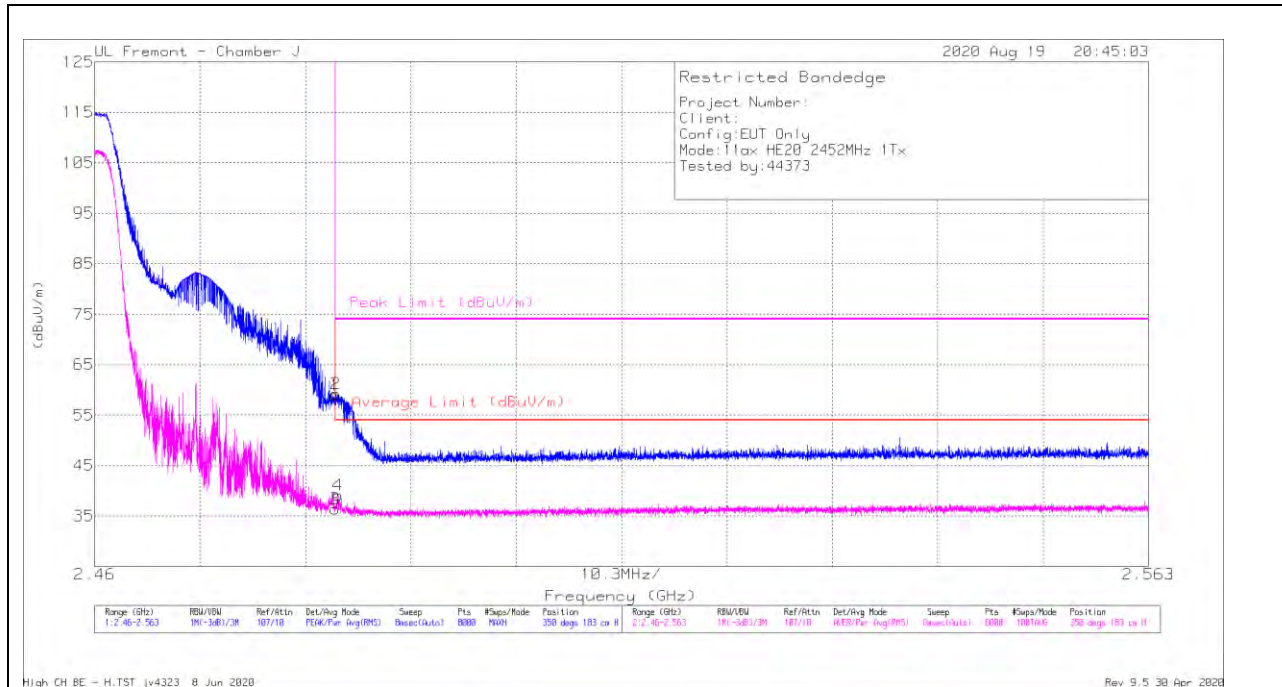

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Fitr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	44.06	Pk	29.5	-14.6	58.96	-	-	74	-15.04	350	183	H
2	* 2.48354	44.3	Pk	29.5	-14.6	59.2	-	-	74	-14.8	350	183	H
3	* 2.4835	21.53	RMS	29.5	-14.6	36.43	54	-17.57	-	-	350	183	H
4	* 2.48377	24.2	RMS	29.5	-14.6	39.1	54	-14.9	-	-	350	183	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

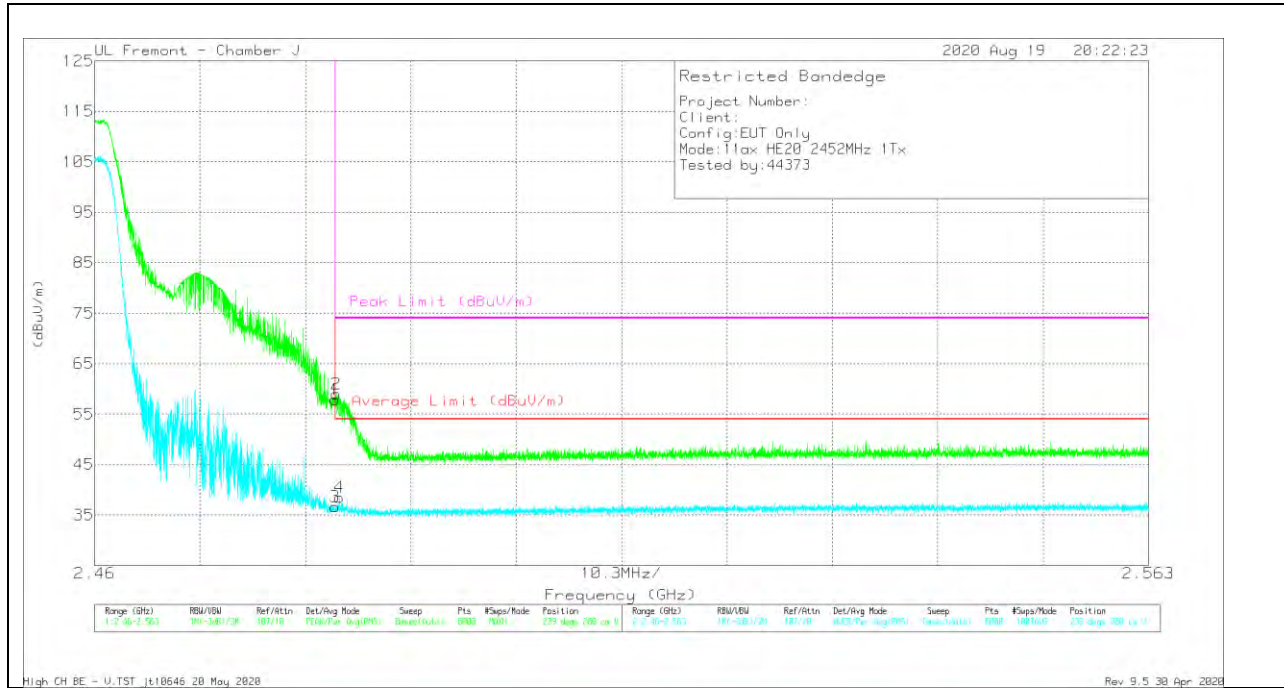


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.93	Pk	29.5	-14.6	57.83	-	-	74	-16.17	239	280	V
2	* 2.48362	44.09	Pk	29.5	-14.6	58.99	-	-	74	-15.01	239	280	V
3	* 2.4835	21.71	RMS	29.5	-14.6	36.61	54	-17.39	-	-	239	280	V
4	* 2.48393	23.59	RMS	29.5	-14.6	38.49	54	-15.51	-	-	239	280	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

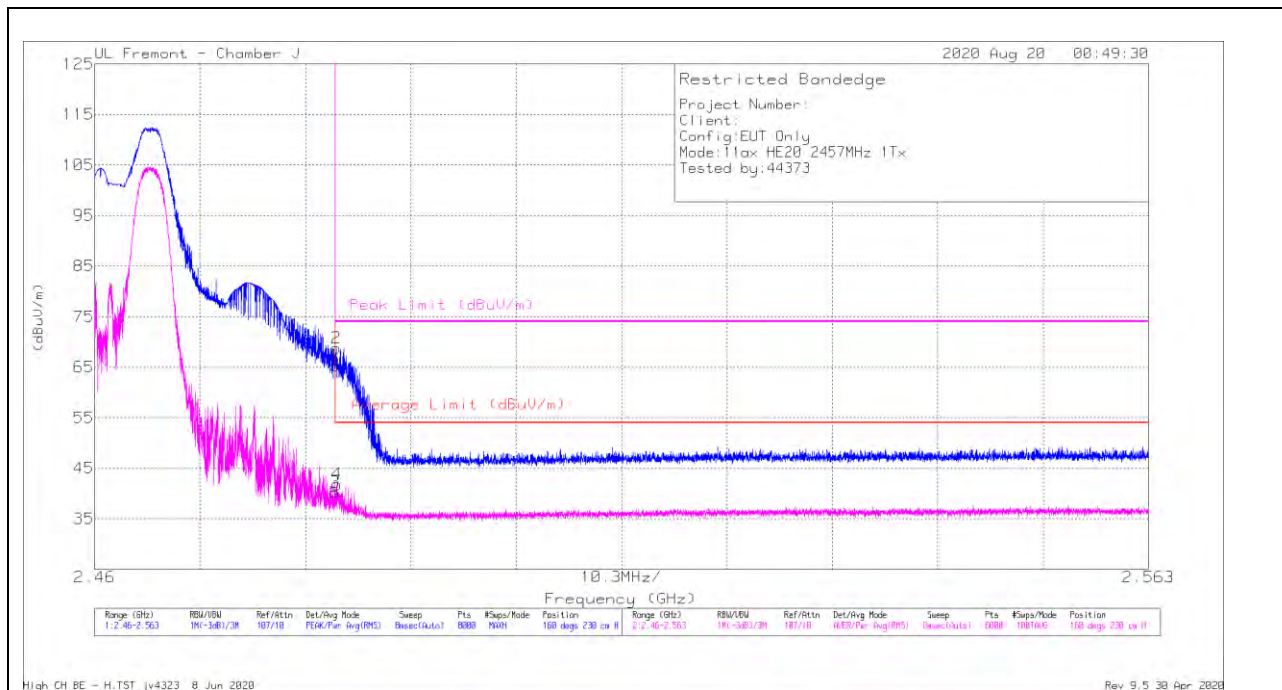

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	50.43	Pk	29.5	-14.6	65.33	-	-	74	-8.67	160	230	H
2	* 2.48362	53.84	Pk	29.5	-14.6	68.74	-	-	74	-5.26	160	230	H
3	* 2.4835	25.35	RMS	29.5	-14.6	40.25	54	-13.75	-	-	160	230	H
4	* 2.48366	26.89	RMS	29.5	-14.6	41.79	54	-12.21	-	-	160	230	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

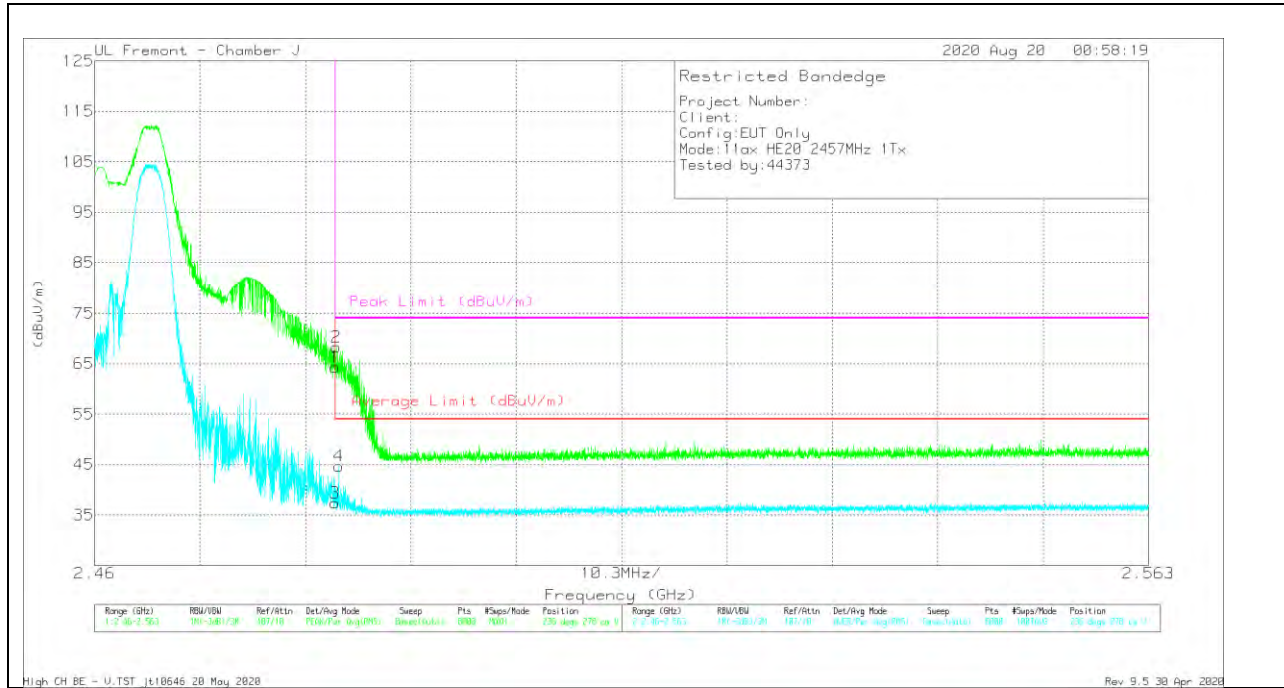


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/CbI/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	49.37	Pk	29.5	-14.6	64.27	-	-	74	-9.73	236	278	V
2	* 2.48362	53.41	Pk	29.5	-14.6	68.31	-	-	74	-5.69	236	278	V
3	* 2.4835	22.5	RMS	29.5	-14.6	37.4	54	-16.6	-	-	236	278	V
4	* 2.48387	29.85	RMS	29.5	-14.6	44.75	54	-9.25	-	-	236	278	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

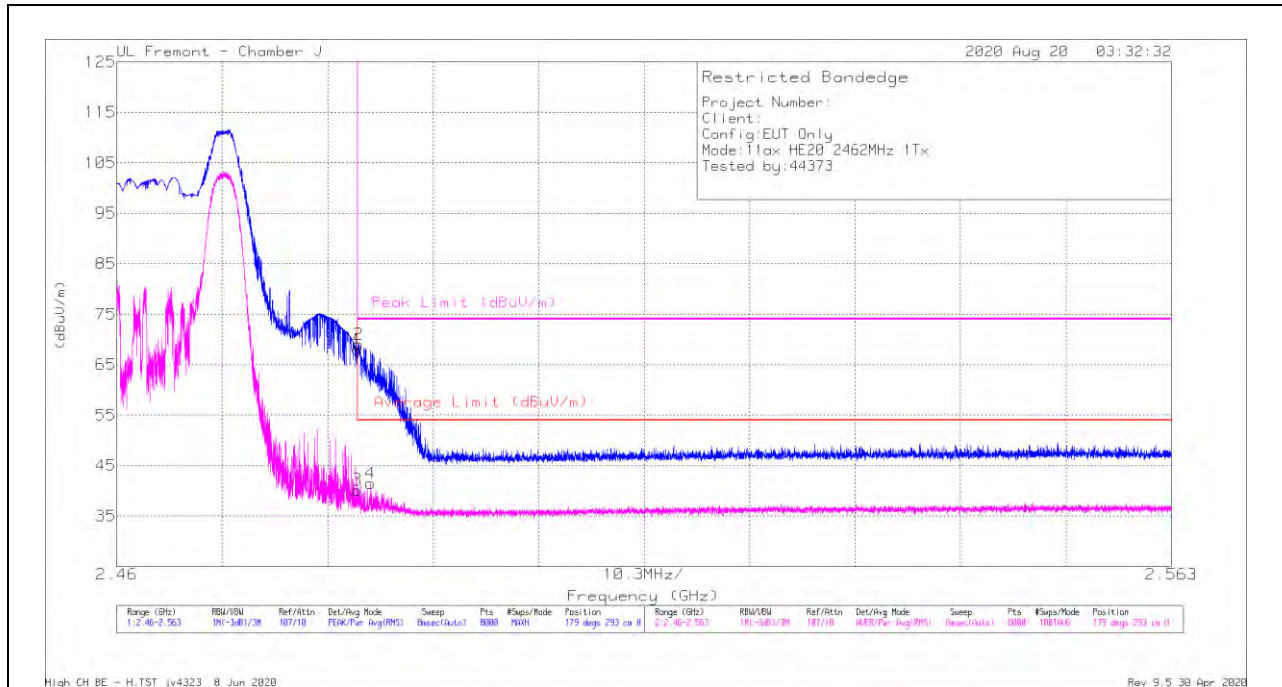

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.13	Pk	29.5	-14.6	68.03	-	-	74	-5.97	179	293	H
2	* 2.48364	54.08	Pk	29.5	-14.6	68.98	-	-	74	-5.02	179	293	H
3	* 2.4835	25.27	RMS	29.5	-14.6	40.17	54	-13.83	-	-	179	293	H
4	* 2.48478	26.58	RMS	29.5	-14.6	41.48	54	-12.52	-	-	179	293	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

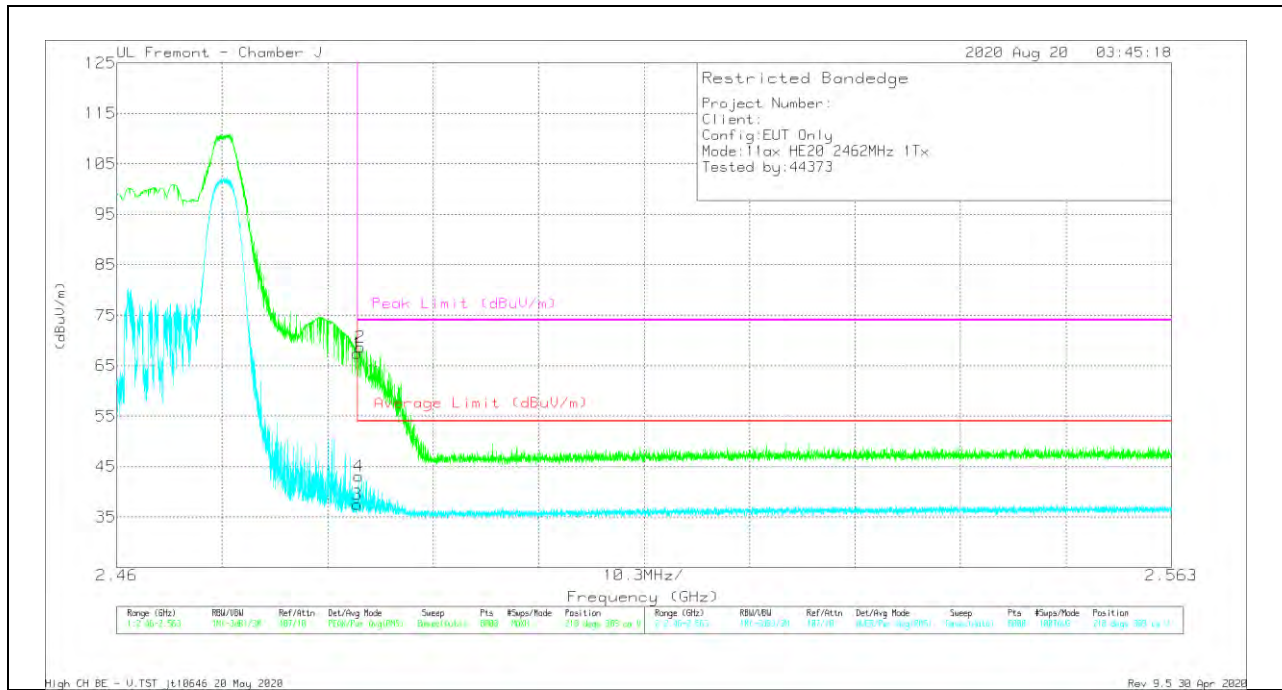


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	52.56	Pk	29.5	-14.6	67.46	-	-	74	-6.54	218	309	V
2	* 2.48378	53.77	Pk	29.5	-14.6	68.67	-	-	74	-5.33	218	309	V
3	* 2.4835	22.64	RMS	29.5	-14.6	37.54	54	-16.46	-	-	218	309	V
4	* 2.4836	28.24	RMS	29.5	-14.6	43.14	54	-10.86	-	-	218	309	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

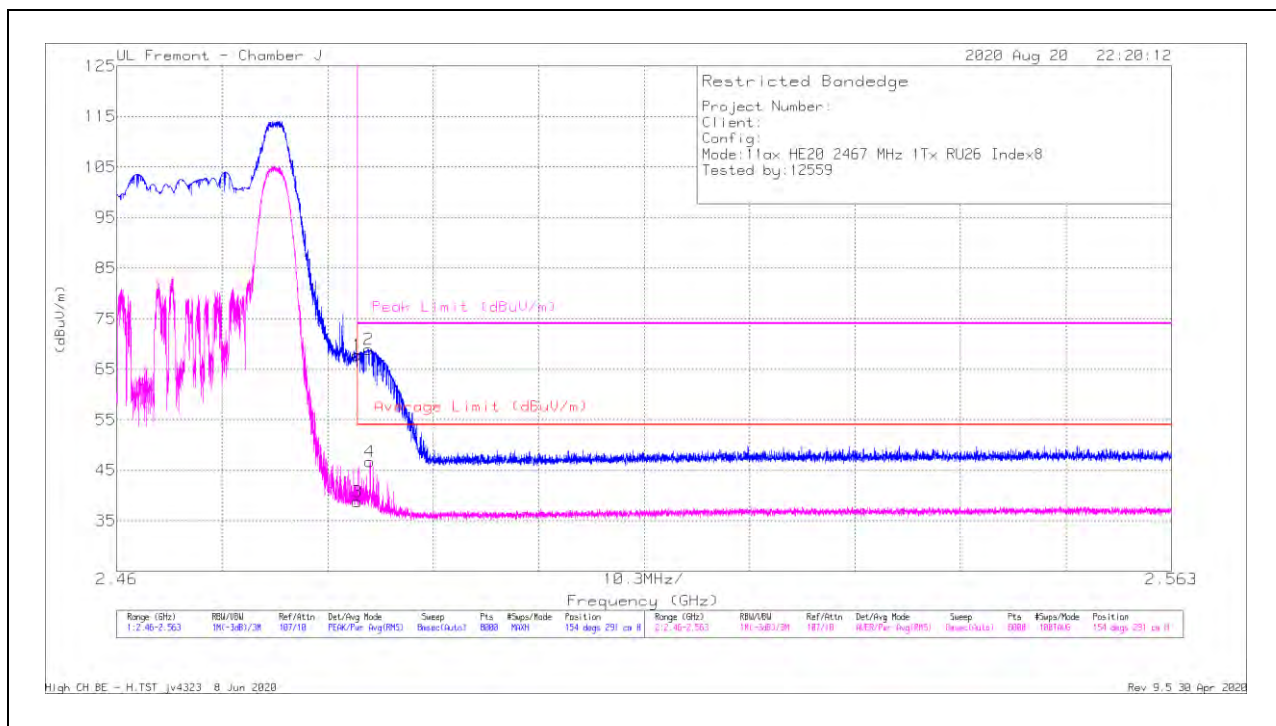

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	52.53	Pk	29.5	-14.2	67.83	-	-	74	-6.17	154	291	H
2	* 2.48461	53.67	Pk	29.5	-14.2	68.97	-	-	74	-5.03	154	291	H
3	* 2.4835	23.43	RMS	29.5	-14.2	38.73	54	-15.27	-	-	154	291	H
4	* 2.48472	31.37	RMS	29.5	-14.2	46.67	54	-7.33	-	-	154	291	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

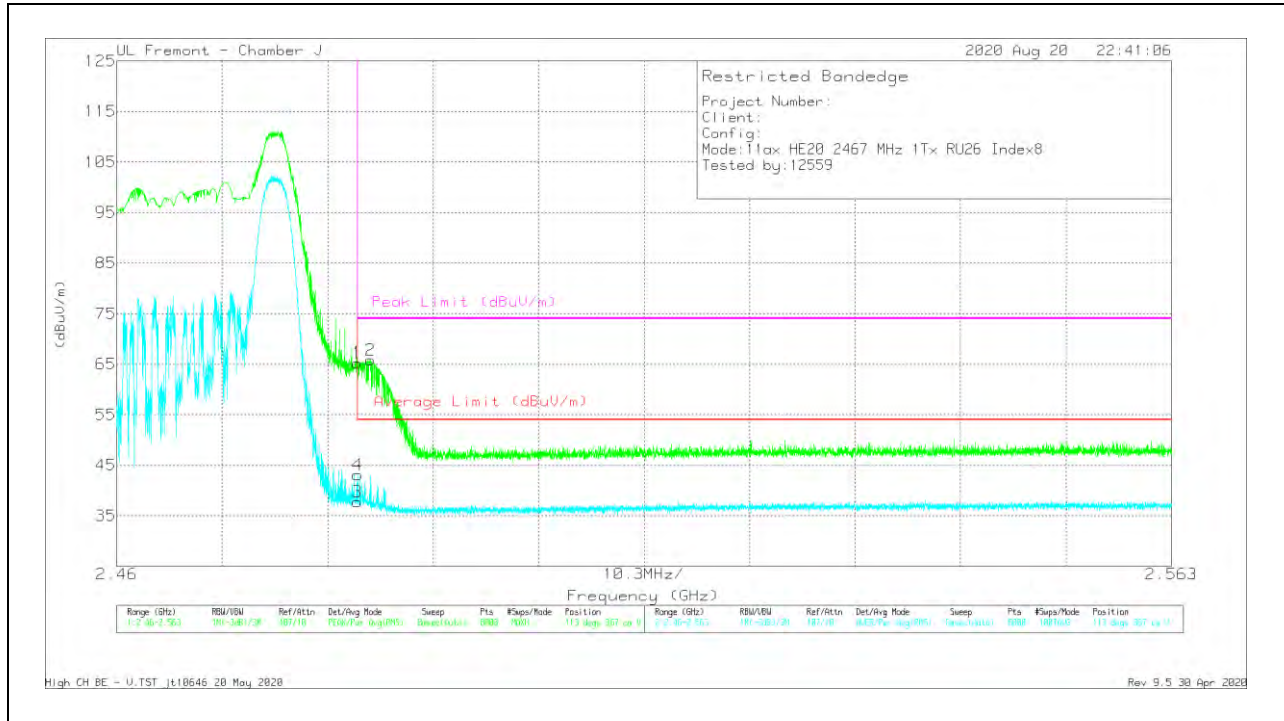


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	49.95	Pk	29.5	-14.2	65.25	-	-	74	-8.75	113	367	V
2	* 2.48479	50.46	Pk	29.5	-14.2	65.76	-	-	74	-8.24	113	367	V
3	* 2.4835	22.4	RMS	29.5	-14.2	37.7	54	-16.3	-	-	113	367	V
4	* 2.48353	27.84	RMS	29.5	-14.2	43.14	54	-10.86	-	-	113	367	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

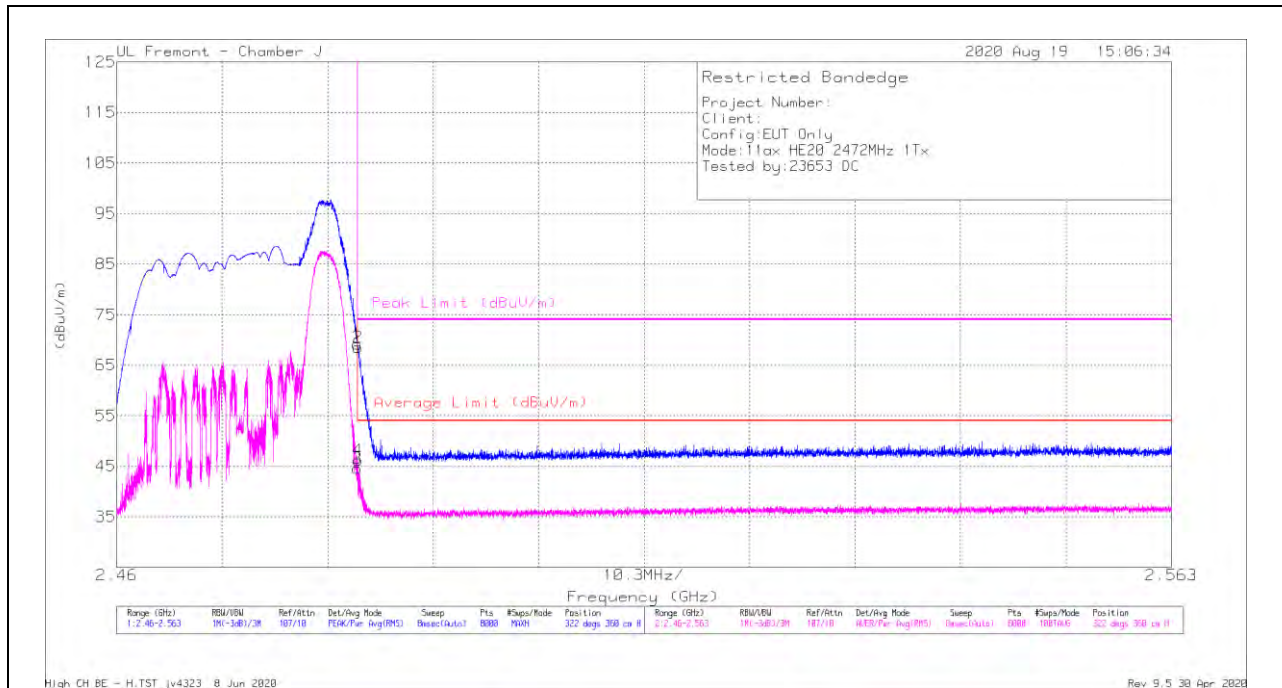

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Parad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.27	Pk	29.5	-14.6	69.17	-	-	74	-4.83	322	360	H
2	* 2.48354	53.62	Pk	29.5	-14.6	68.52	-	-	74	-5.48	322	360	H
3	* 2.4835	29.68	RMS	29.5	-14.6	44.58	54	-9.42	-	-	322	360	H
4	* 2.48356	31.25	RMS	29.5	-14.6	46.15	54	-7.85	-	-	322	360	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

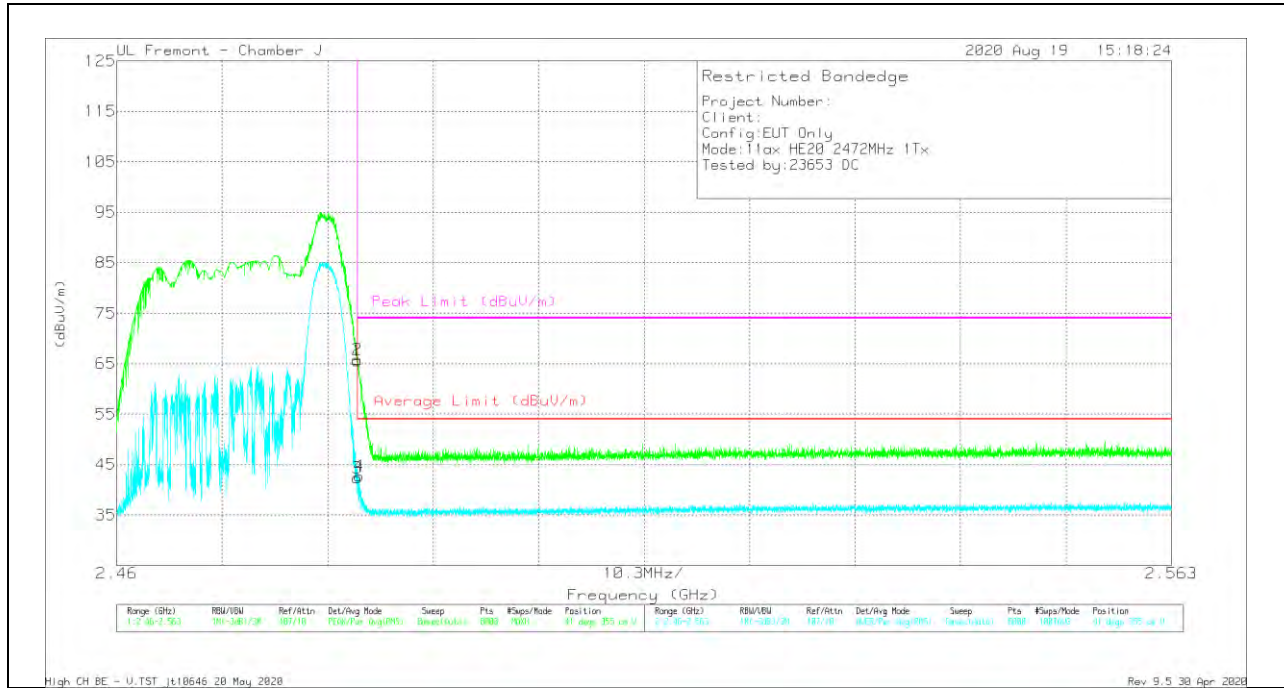

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	50.65	Pk	29.5	-14.6	65.55	-	-	74	-8.45	41	355	V
2	* 2.48351	50.87	Pk	29.5	-14.6	65.77	-	-	74	-8.23	41	355	V
3	* 2.4835	27.42	RMS	29.5	-14.6	42.32	54	-11.68	-	-	41	355	V
4	* 2.48367	27.81	RMS	29.5	-14.6	42.71	54	-11.29	-	-	41	355	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection