


VERTICAL RESULT

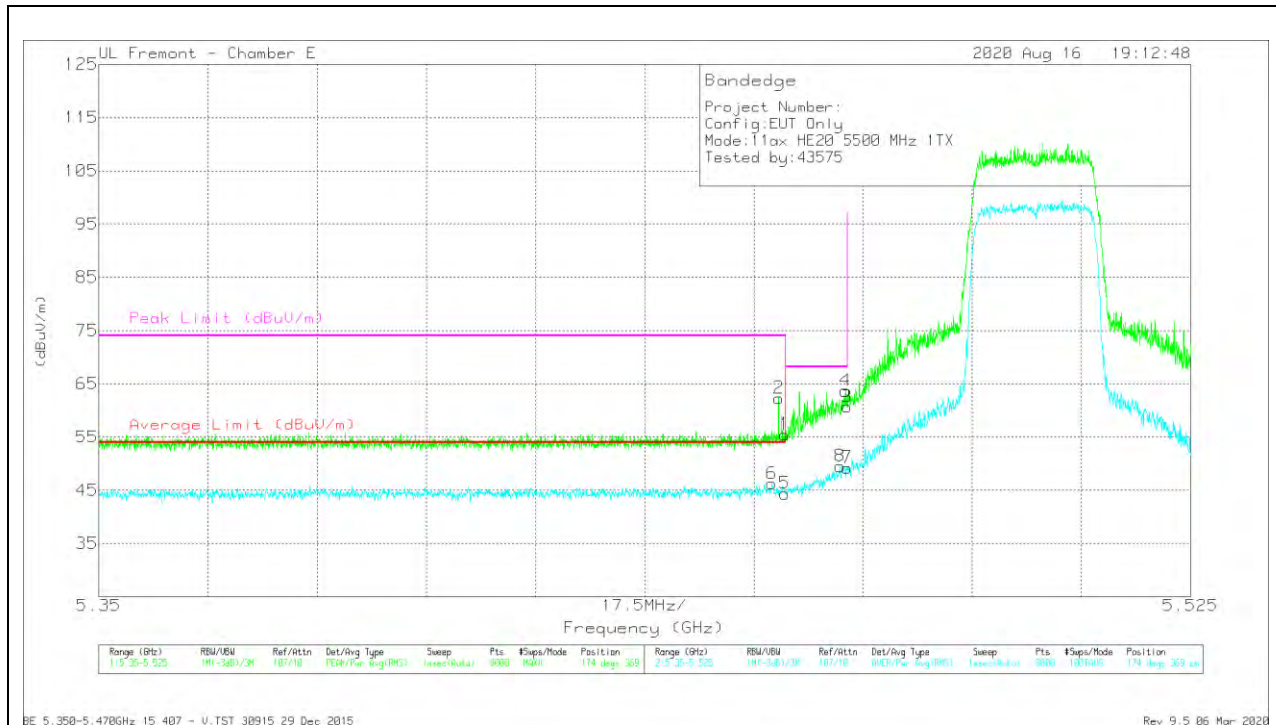


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.66	Pk	34.5	-21.7	55.46	-	-	74	-18.54	174	369	V
2	* 5.45897	49.4	Pk	34.6	-21.7	62.3	-	-	74	-11.7	174	369	V
5	* 5.45998	31.58	RMS	34.5	-21.7	44.38	54	-9.62	-	-	174	369	V
6	* 5.45786	33.33	RMS	34.6	-21.7	46.23	54	-7.77	-	-	174	369	V
8	5.46878	36.71	RMS	34.5	-21.7	49.51	-	-	-	-	174	369	V
4	5.46969	50.8	Pk	34.6	-21.7	63.7	-	-	68.2	-4.5	174	369	V
3	5.46998	47.77	Pk	34.6	-21.7	60.67	-	-	68.2	-7.53	174	369	V
7	5.46998	36.32	RMS	34.6	-21.7	49.22	-	-	-	-	174	369	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

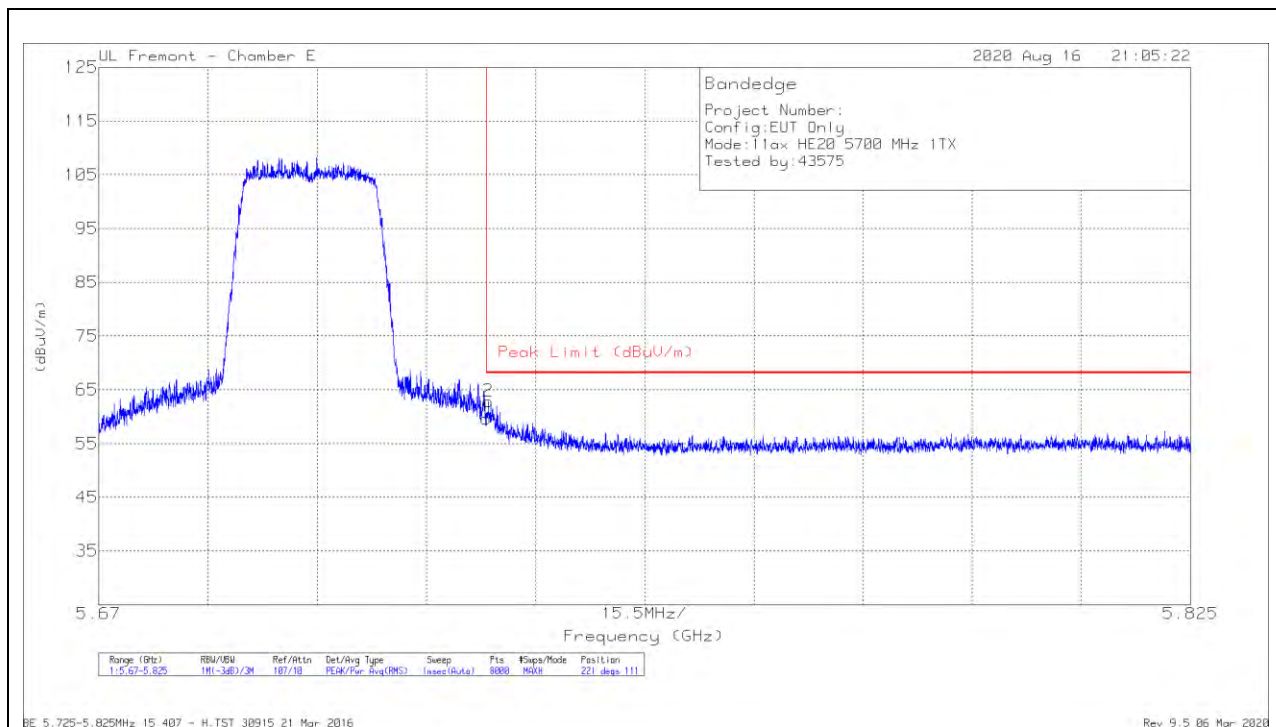

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.13	Pk	34.7	-21.2	59.63	68.2	-8.57	221	111	H
2	5.72528	49.37	Pk	34.7	-21.2	62.87	68.2	-5.33	221	111	H

Pk - Peak detector

VERTICAL RESULT

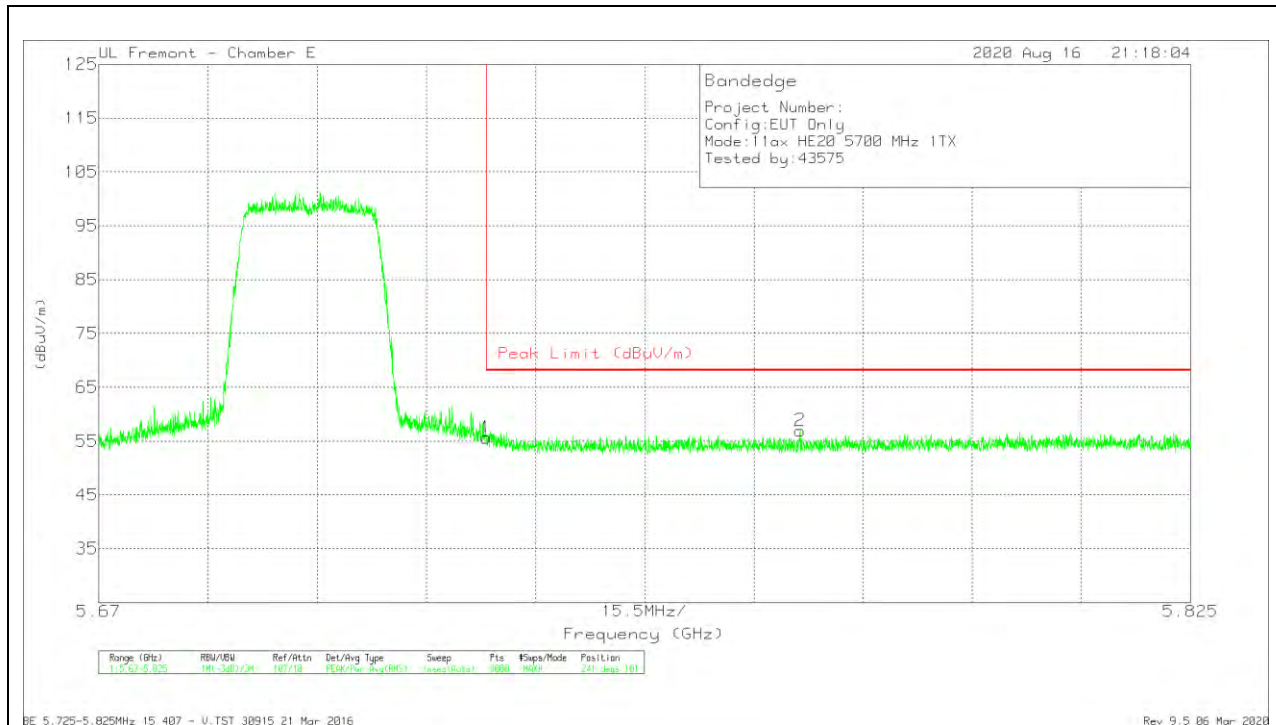


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	42.15	Pk	34.7	-21.2	55.65	68.2	-12.55	241	101	V
2	5.76956	43.13	Pk	34.8	-21	56.93	68.2	-11.27	241	101	V

Pk - Peak detector

**1TX ANT 6 – 26 Tones, RU Index 0
 BANDEDGE (LOW CHANNEL)**


HORIZONTAL RESULT

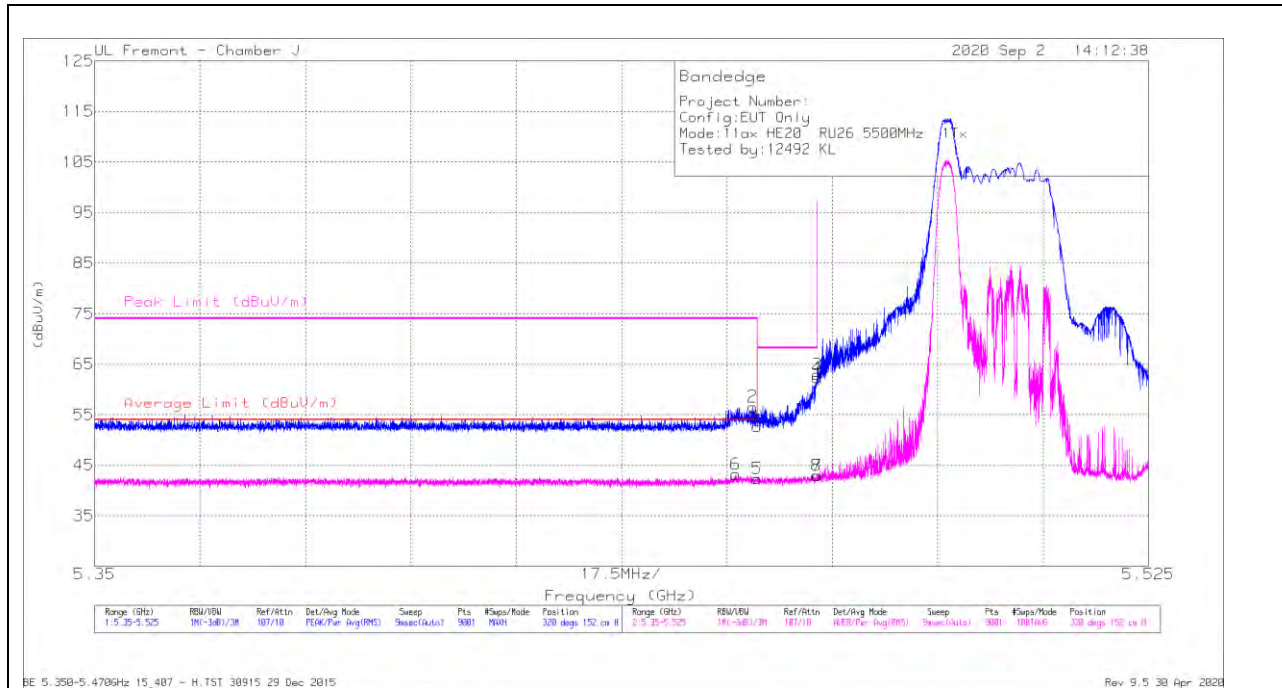

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	39.7	Pk	33	-20.1	52.6	-	-	74	-21.4	320	152	H
2	* 5.45924	43.66	Pk	33	-20.1	56.56	-	-	74	-17.44	320	152	H
3	5.46999	49.93	Pk	33.1	-20.1	62.93	-	-	68.2	-5.27	320	152	H
4	5.46995	49.28	Pk	33.1	-20.1	62.28	-	-	68.2	-5.92	320	152	H
5	* 5.45999	29.47	RMS	33	-20.1	42.37	54	-11.63	-	-	320	152	H
6	* 5.45648	30.3	RMS	33	-20.1	43.2	54	-10.8	-	-	320	152	H
7	5.46999	29.97	RMS	33.1	-20.1	42.97	-	-	-	-	320	152	H
8	5.46991	30.02	RMS	33.1	-20.1	43.02	-	-	-	-	320	152	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

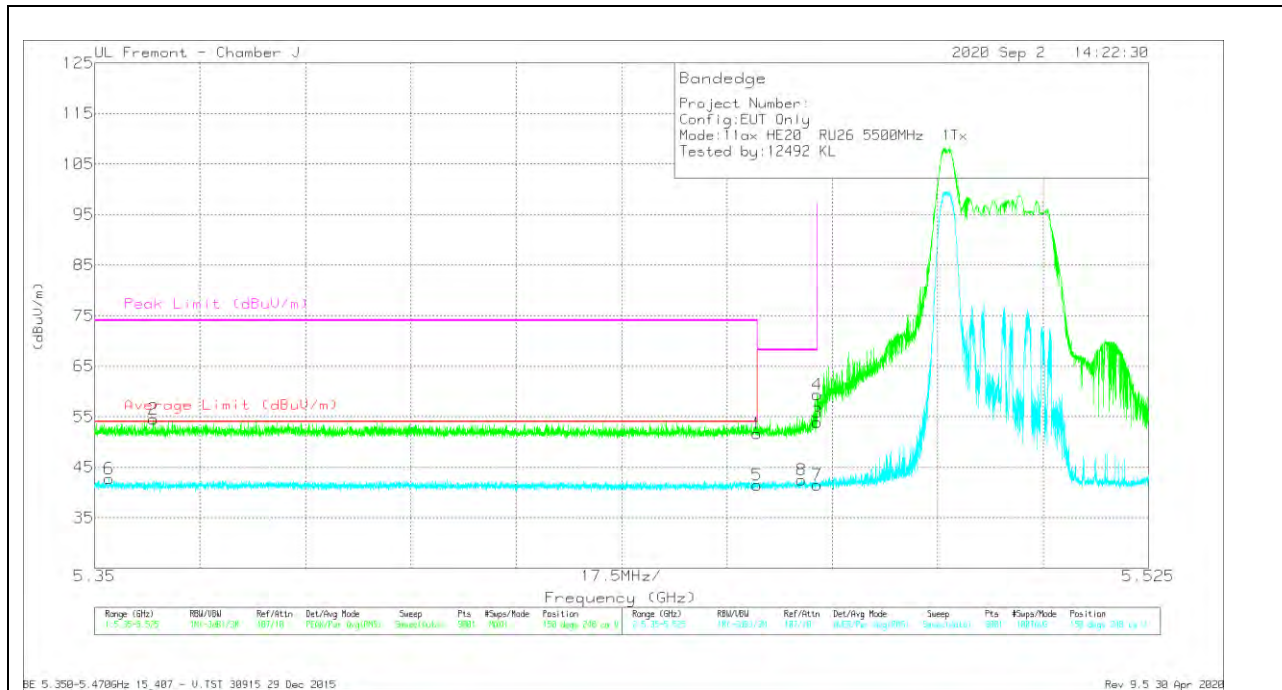


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb1/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	38.77	Pk	33	-20.1	51.67	-	-	74	-22.33	150	248	V
2	* 5.35972	41.73	Pk	33.2	-20.4	54.53	-	-	74	-19.47	150	248	V
3	5.46999	40.85	Pk	33.1	-20.1	53.85	-	-	68.2	-14.35	150	248	V
4	5.46995	46.41	Pk	33.1	-20.1	59.41	-	-	68.2	-8.79	150	248	V
5	* 5.45999	28.54	RMS	33	-20.1	41.44	54	-12.56	-	-	150	248	V
6	* 5.35239	29.78	RMS	33.3	-20.4	42.68	54	-11.32	-	-	150	248	V
7	5.46999	28.5	RMS	33.1	-20.1	41.5	-	-	-	-	150	248	V
8	5.4674	29.56	RMS	33	-20.1	42.46	-	-	-	-	150	248	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

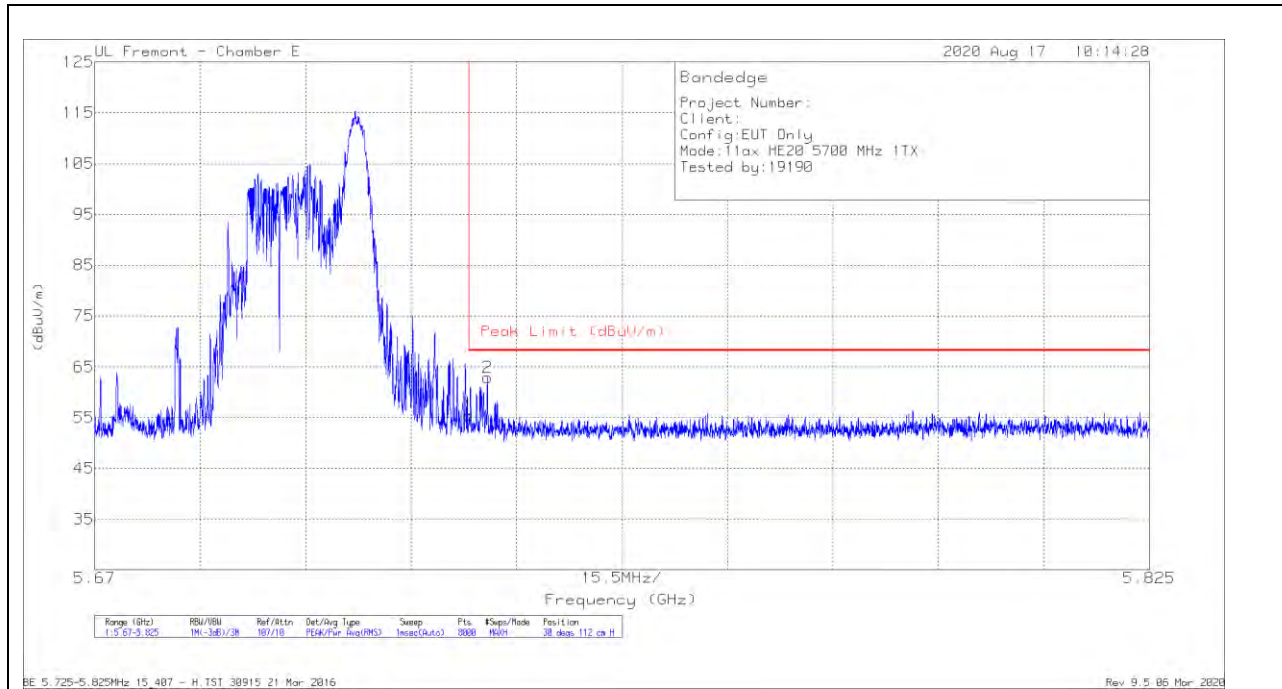


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	41.84	Pk	34.7	-21.2	55.34	68.2	-12.86	30	112	H
2	5.72772	49.35	Pk	34.7	-21.2	62.85	68.2	-5.35	30	112	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

VERTICAL RESULT

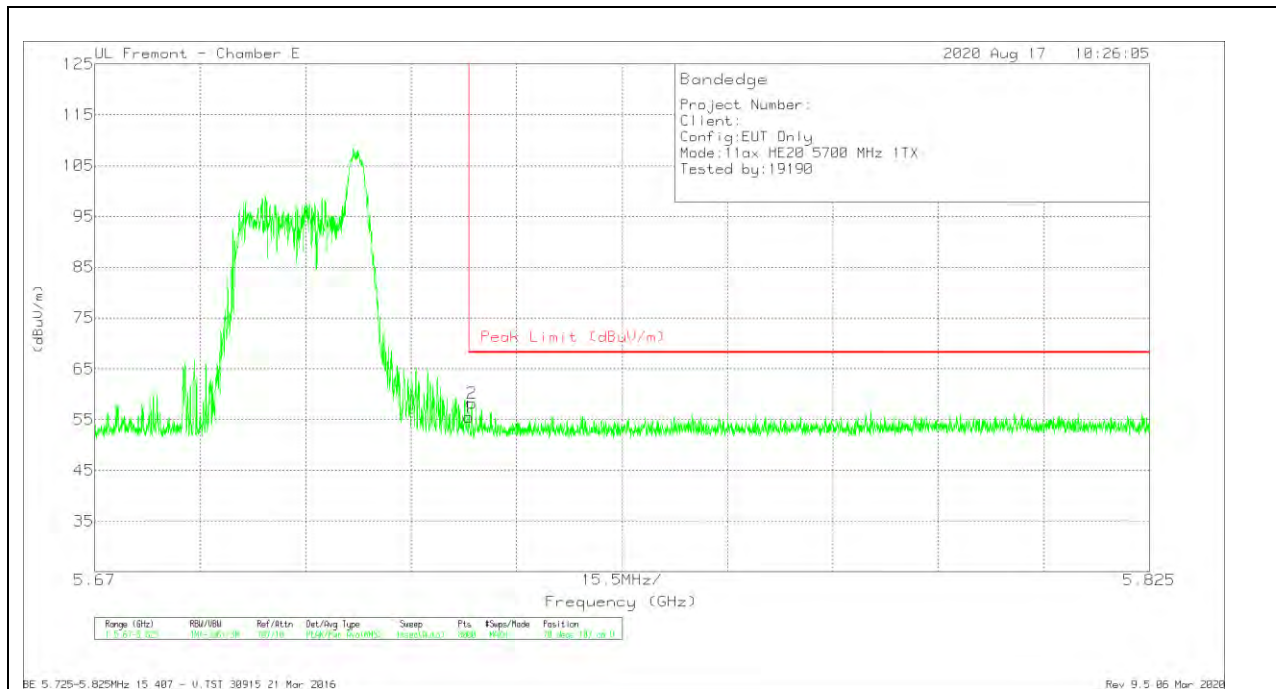


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	41.95	Pk	34.7	-21.2	55.45	68.2	-12.75	70	107	V
2	5.7254	44.76	Pk	34.7	-21.2	58.26	68.2	-9.94	70	107	V

Pk - Peak detector

2TX ANT 5 + ANT 6 OFDMA MODE – SU, RU Index 61

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

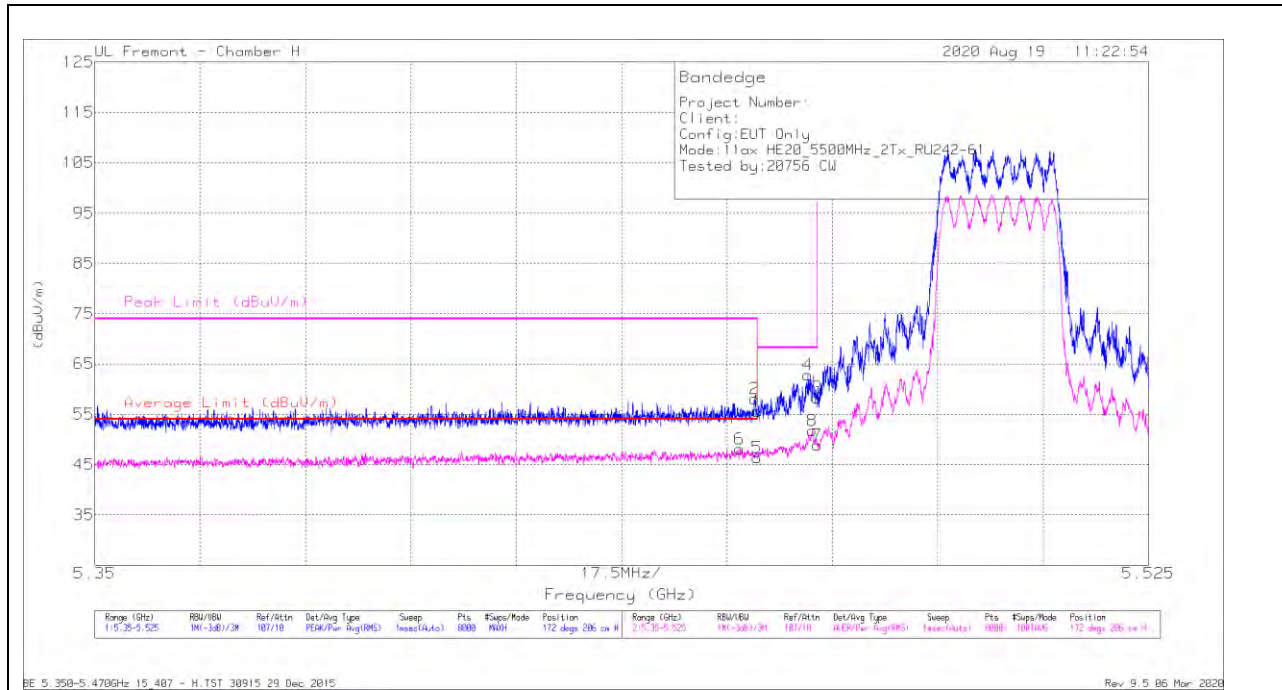

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.36	Pk	35.2	-20.9	55.66	-	-	74	-18.34	172	206	H
2	* 5.45961	43.76	Pk	35.2	-20.9	58.06	-	-	74	-15.94	172	206	H
5	* 5.45998	32.1	RMS	35.2	-20.9	46.4	54	-7.6	-	-	172	206	H
6	* 5.45714	33.73	RMS	35.3	-20.9	48.13	54	-5.87	-	-	172	206	H
4	5.46845	48.4	Pk	35.3	-20.9	62.8	-	-	68.2	-5.4	172	206	H
8	5.46919	37.47	RMS	35.3	-21	51.77	-	-	-	-	172	206	H
3	5.46998	43.99	Pk	35.3	-21	58.29	-	-	68.2	-9.91	172	206	H
7	5.46998	34.59	RMS	35.3	-21	48.89	-	-	-	-	172	206	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

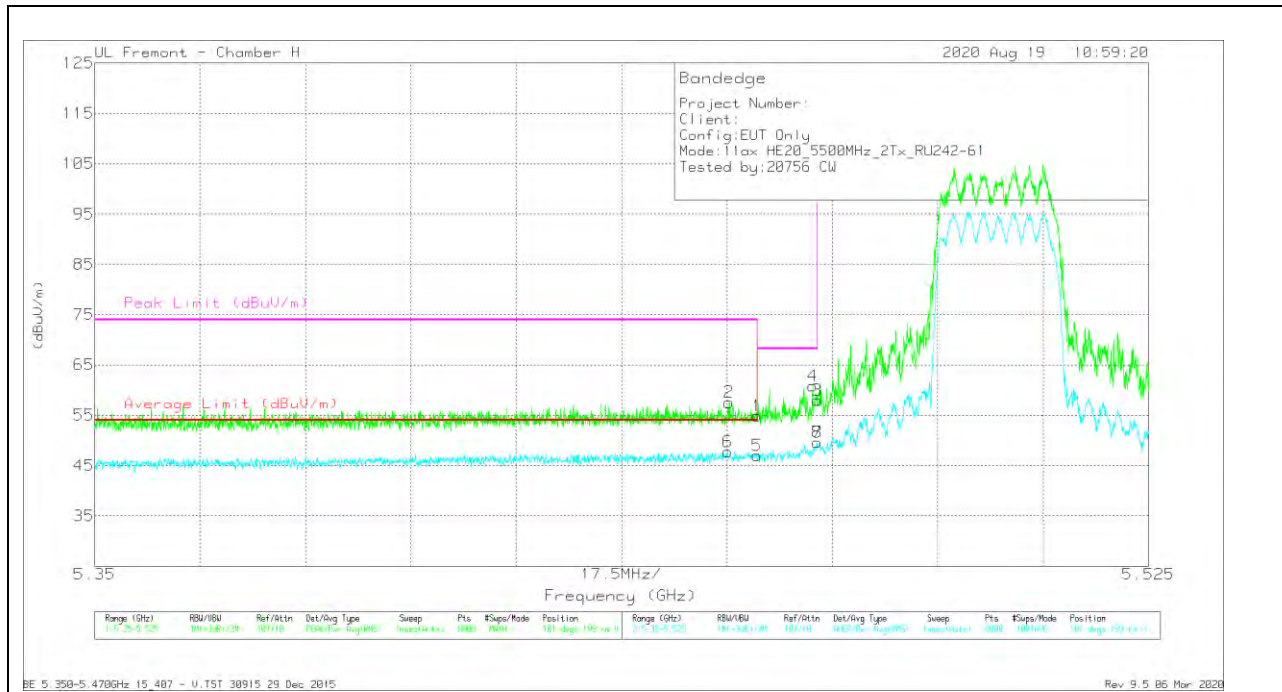


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbll/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.57	Pk	35.2	-20.9	54.87	-	-	74	-19.13	101	199	V
2	* 5.45536	43.15	Pk	35.3	-20.9	57.55	-	-	74	-16.45	101	199	V
5	* 5.45998	32.76	RMS	35.2	-20.9	47.06	54	-6.94	-	-	101	199	V
6	* 5.45508	33.4	RMS	35.3	-20.9	47.8	54	-6.2	-	-	101	199	V
4	5.46924	46.54	Pk	35.3	-21	60.84	-	-	68.2	-7.36	101	199	V
8	5.46996	35.32	RMS	35.3	-21	49.62	-	-	-	-	101	199	V
3	5.46998	43.7	Pk	35.3	-21	58	-	-	68.2	-10.2	101	199	V
7	5.46998	35.35	RMS	35.3	-21	49.65	-	-	-	-	101	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

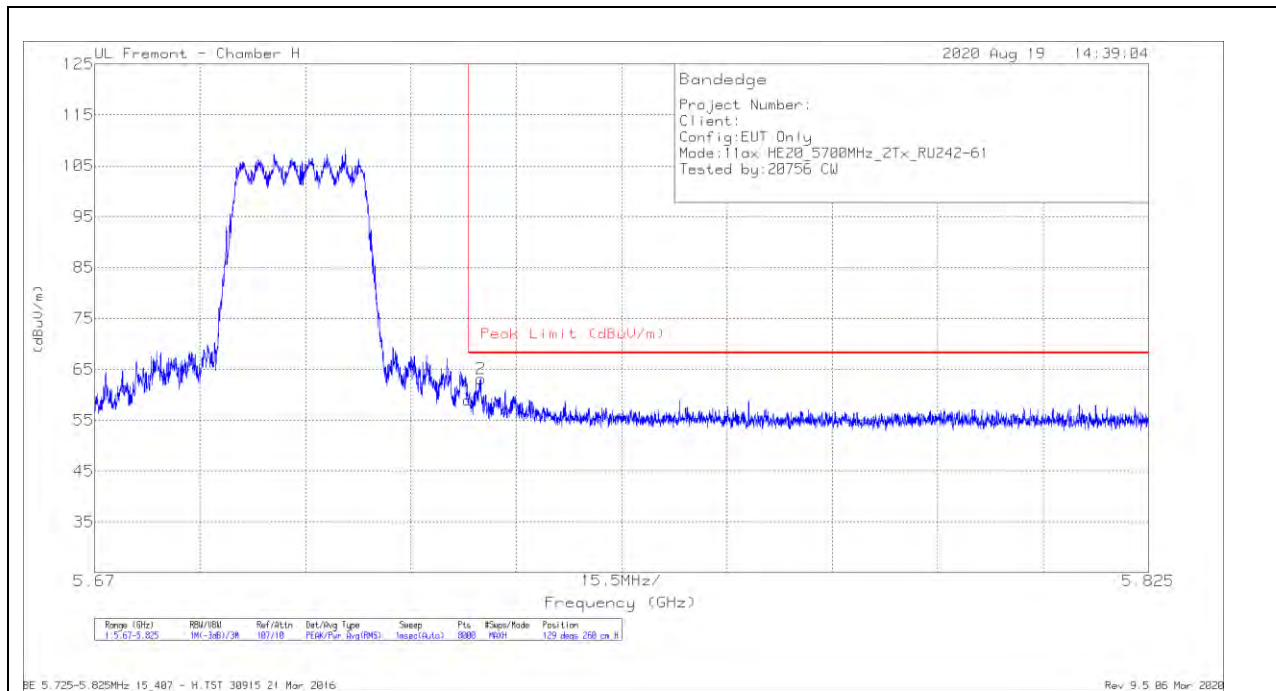

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.08	Pk	35	-21.1	58.98	68.2	-9.22	129	260	H
2	5.72677	49.34	Pk	34.9	-21.1	63.14	68.2	-5.06	129	260	H

Pk - Peak detector

VERTICAL RESULT

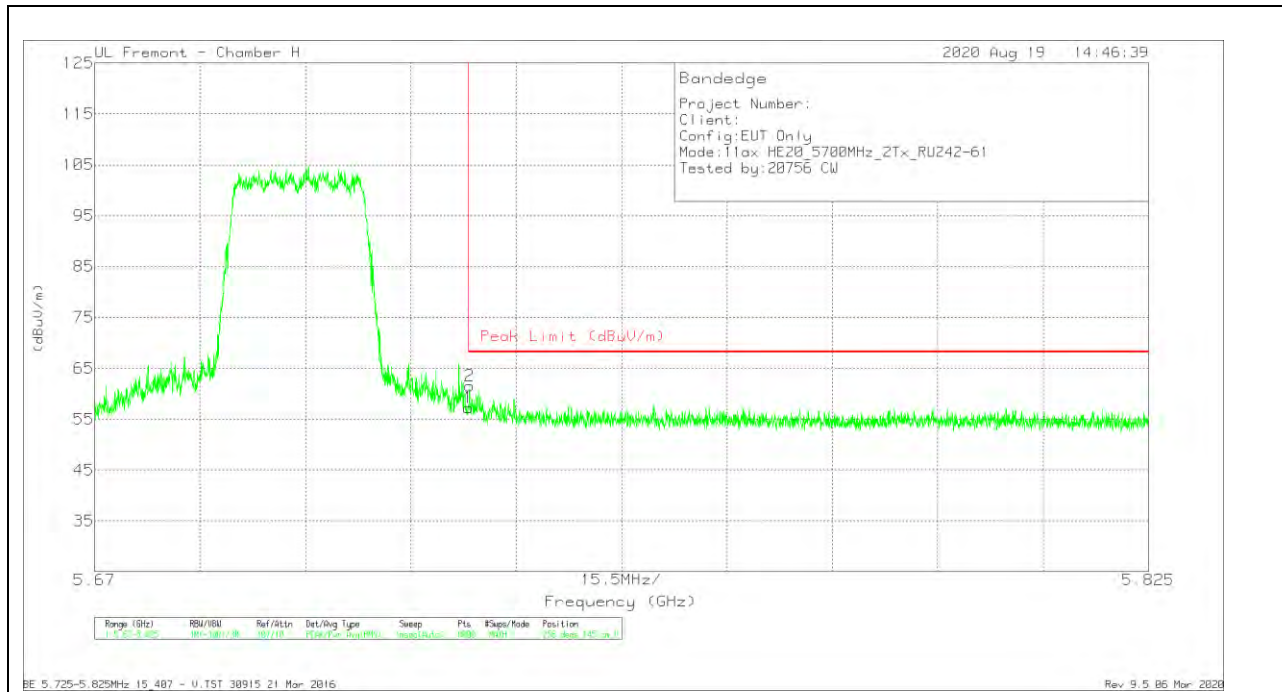


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	43.28	Pk	35	-21.1	57.18	68.2	-11.02	256	145	V
2	5.72515	47.67	Pk	35	-21.1	61.57	68.2	-6.63	256	145	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

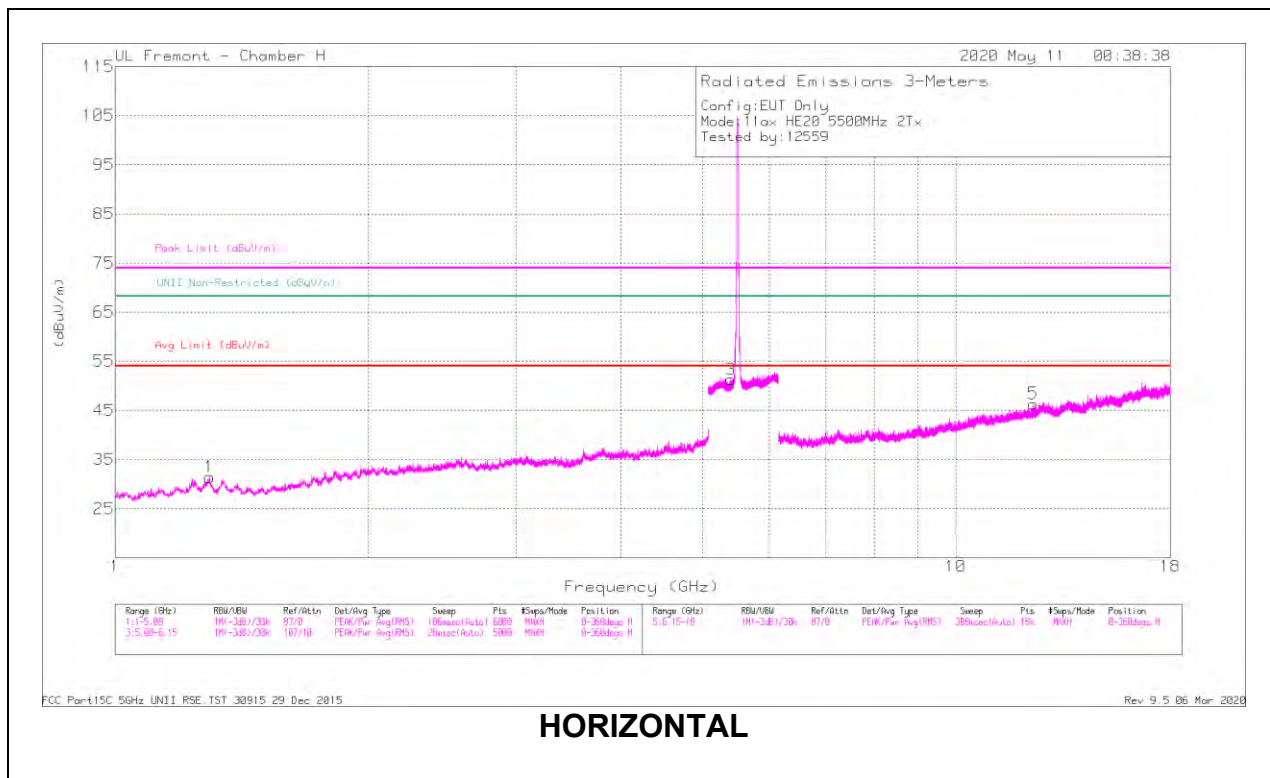

HORIZONTAL

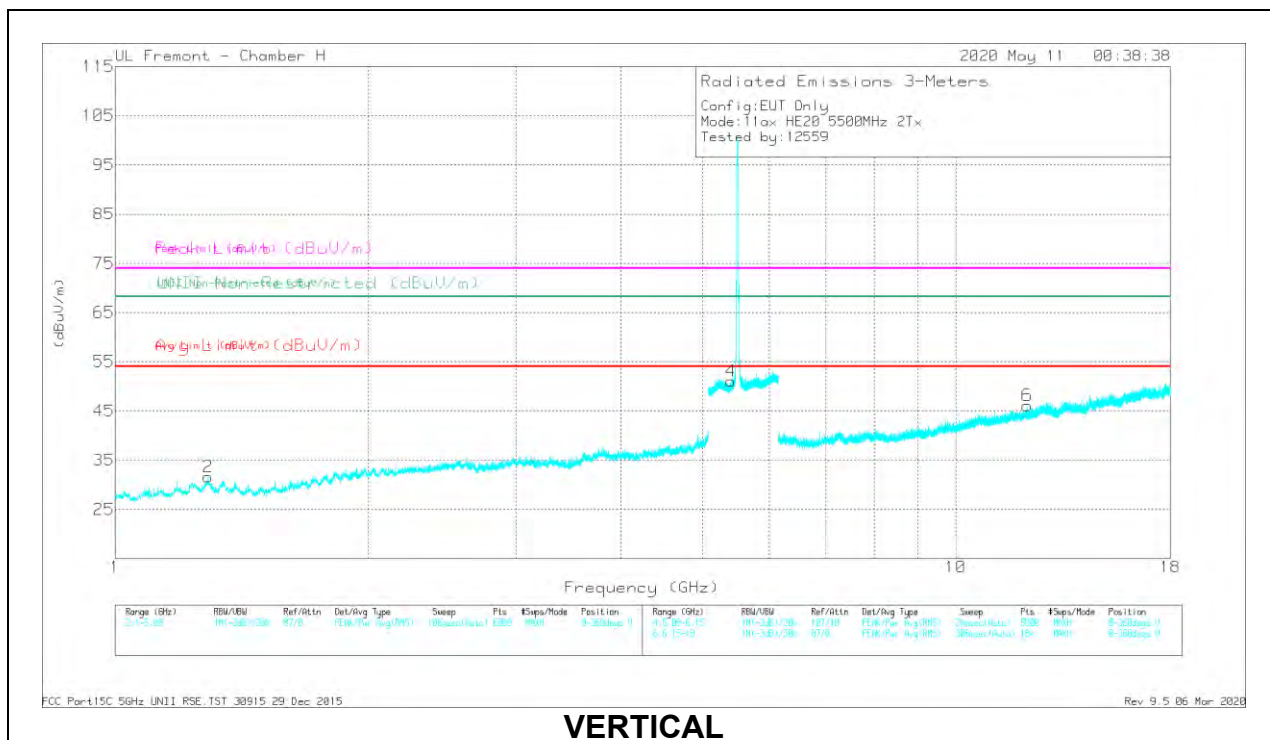


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBµV)	Det	AF T8E3 (dBm)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNII Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.29498	44.38	PK-U	28.9	-35.1	38.19	-	-	74	-35.82	-	-	65	232	H
	* 1.29326	32.95	ADR	29	-35.1	26.85	54	-27.15	-	-	-	-	65	232	H
2	* 1.29004	44.42	PK-U	29.2	-35.1	38.52	-	-	74	-35.48	-	-	112	240	V
	* 1.2878	33.04	ADR	29.2	-35.1	27.14	54	-26.86	-	-	-	-	112	240	V
3	* 5.39948	44.18	PK-U	35.1	-20.9	58.38	-	-	74	-15.62	-	-	216	154	H
	* 5.40158	32.49	ADR	35	-20.9	46.68	54	-7.32	-	-	-	-	216	154	H
4	* 5.39999	43.89	PK-U	35.1	-20.9	58.09	-	-	74	-15.91	-	-	259	156	V
	* 5.40005	32.41	ADR	35	-20.9	46.51	54	-7.49	-	-	-	-	259	156	V
5	* 12.36954	37.28	PK-U	38.9	-24.1	52.08	-	-	74	-21.92	-	-	329	153	H
	* 12.37032	26.27	ADR	38.9	-24.1	41.07	54	-12.93	-	-	-	-	329	153	H
6	* 12.1631	36.61	PK-U	38.9	-23.8	51.71	-	-	74	-22.29	-	-	259	200	V
	* 12.16289	25.75	ADR	38.9	-23.8	40.85	54	-13.15	-	-	-	-	259	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

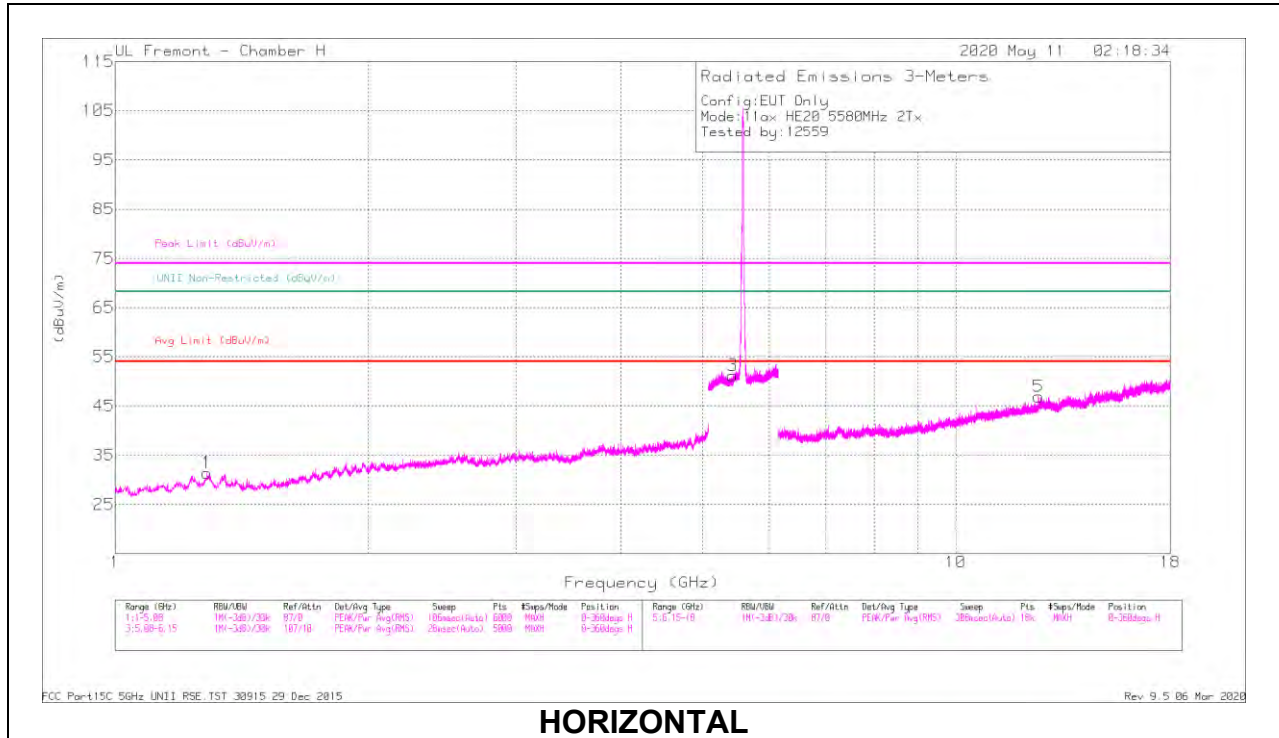

HORIZONTAL

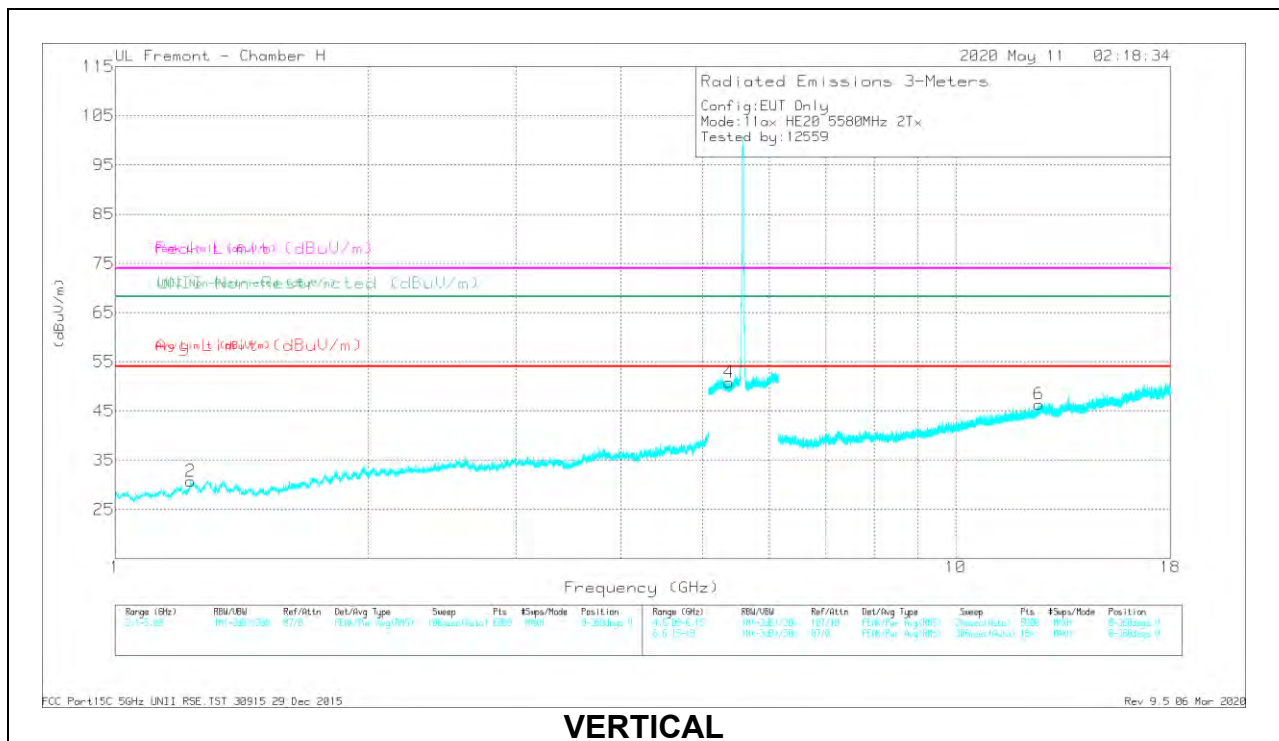


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBµV)	Det	AF T863 (dBm)	Amp/Cbl/Filr/Pad (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNII Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.28661	45.2	PK-U	29.2	-35.1	39.3	-	-	74	-34.7	-	-	66	215	H
	* 1.28738	32.89	ADR	29.2	-35.1	26.99	54	-27.01	-	-	-	-	66	215	H
2	* 1.22802	44.86	PK-U	28.8	-35.4	38.26	-	-	74	-35.74	-	-	152	197	V
	* 1.23038	32.96	ADR	28.8	-35.4	26.36	54	-27.64	-	-	-	-	152	197	V
3	* 5.42626	43.79	PK-U	35.1	-20.9	57.99	-	-	74	-16.01	-	-	178	263	H
	* 5.4275	32.5	ADR	35.1	-20.9	46.7	54	-7.3	-	-	-	-	178	263	H
4	* 5.37764	43.69	PK-U	34.9	-20.9	57.69	-	-	74	-16.31	-	-	235	225	V
	* 5.37643	32.25	ADR	34.9	-20.9	46.25	54	-7.75	-	-	-	-	235	225	V
5	* 12.54757	36.87	PK-U	39.5	-23.7	52.67	-	-	74	-21.33	-	-	289	202	H
	* 12.54866	25.92	ADR	39.5	-23.6	41.82	54	-12.18	-	-	-	-	289	202	H
6	* 12.56291	37.01	PK-U	39.5	-23.5	53.01	-	-	74	-20.99	-	-	164	161	V
	* 12.56278	25.99	ADR	39.5	-23.5	41.99	54	-12.01	-	-	-	-	164	161	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

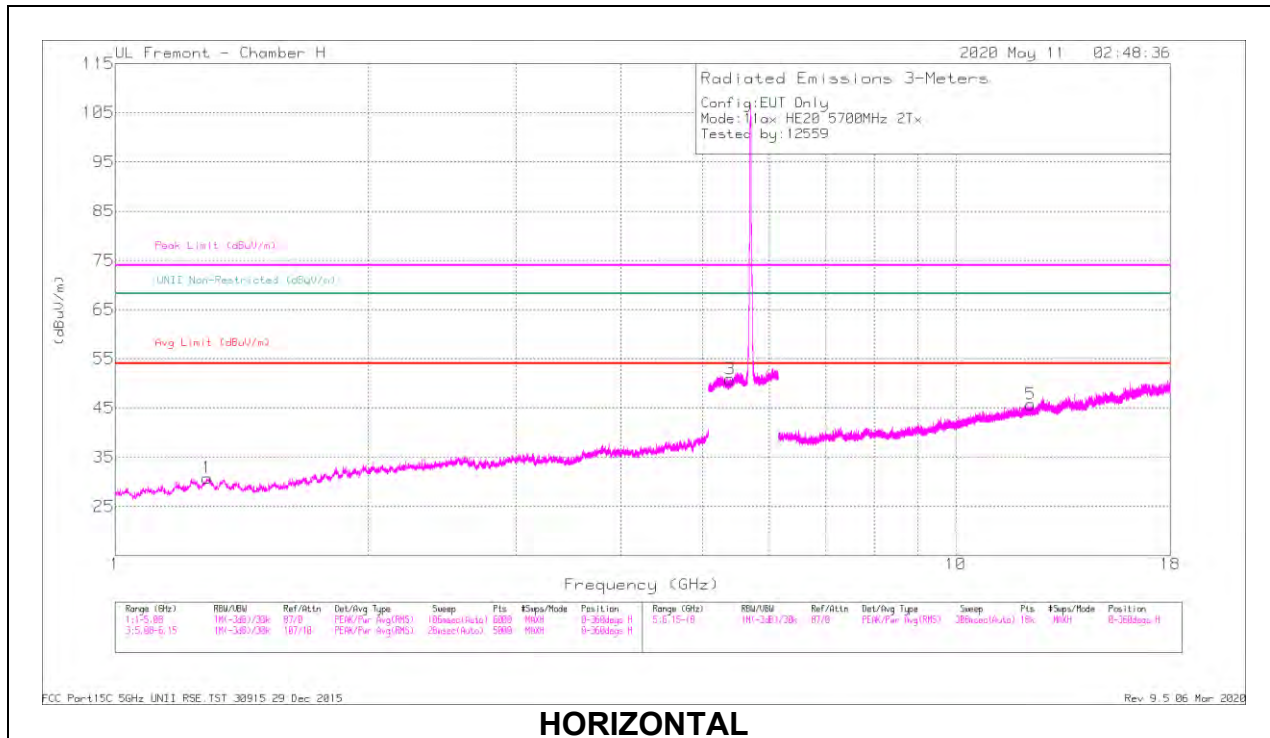

HORIZONTAL

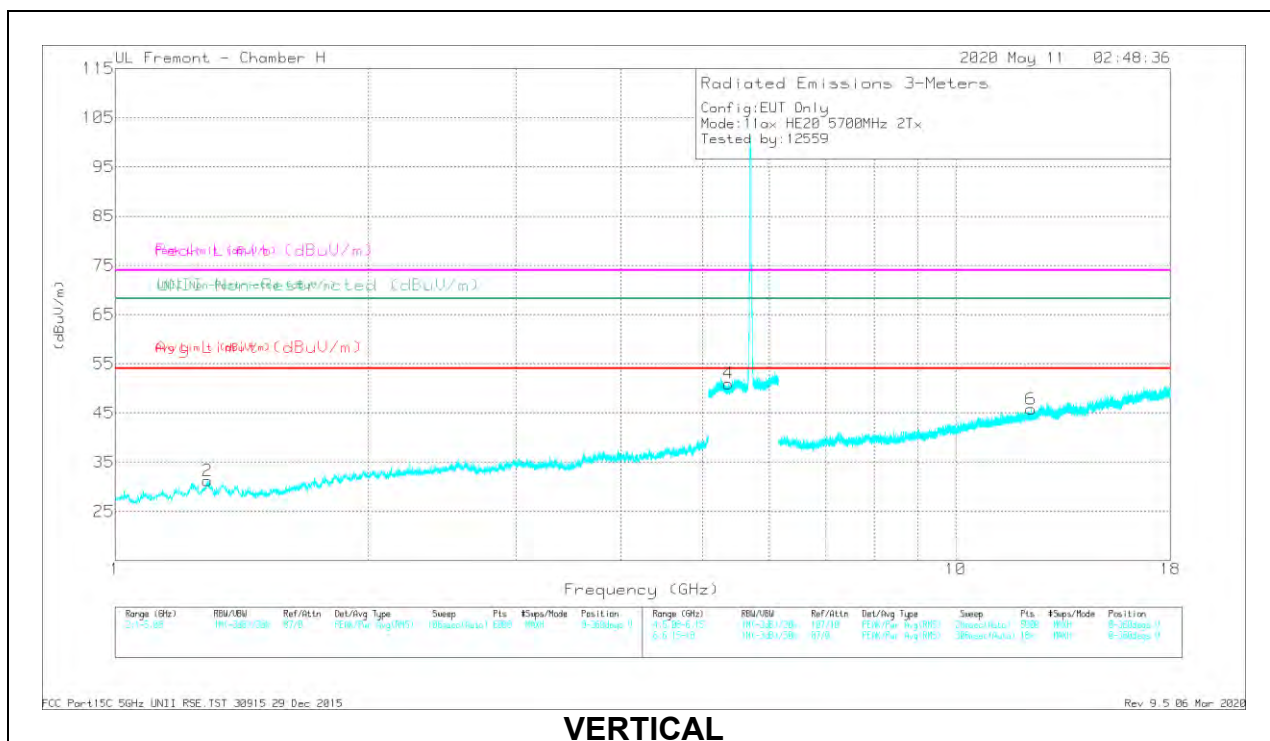


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBµV)	Det	AF T8E3 (dBim)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNII Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.28729	43.96	PK-U	29.2	-35.1	38.06	-	-	74	-35.94	-	-	113	119	H
	* 1.2877	32.89	ADR	29.2	-35.1	26.99	54	-27.01	-	-	-	-	113	119	H
2	* 1.28662	44.36	PK-U	29.2	-35.1	38.46	-	-	74	-35.54	-	-	150	174	V
	* 1.28668	32.96	ADR	29.2	-35.1	27.06	54	-26.94	-	-	-	-	150	174	V
3	* 5.38925	43.75	PK-U	34.9	-20.8	57.85	-	-	74	-16.15	-	-	166	155	H
	* 5.38952	32.34	ADR	34.9	-20.8	46.44	54	-7.56	-	-	-	-	166	155	H
4	* 5.36893	43.49	PK-U	34.9	-20.9	57.49	-	-	74	-16.51	-	-	207	224	V
	* 5.36654	32.29	ADR	35	-20.9	46.39	54	-7.61	-	-	-	-	207	224	V
5	* 12.278	36.98	PK-U	38.9	-23.5	52.38	-	-	74	-21.62	-	-	281	309	H
	* 12.27569	25.73	ADR	38.9	-23.6	41.03	54	-12.97	-	-	-	-	281	309	H
6	* 12.2938	36.92	PK-U	38.9	-23.4	52.42	-	-	74	-21.58	-	-	350	283	V
	* 12.2923	25.75	ADR	38.9	-23.4	41.25	54	-12.75	-	-	-	-	350	283	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

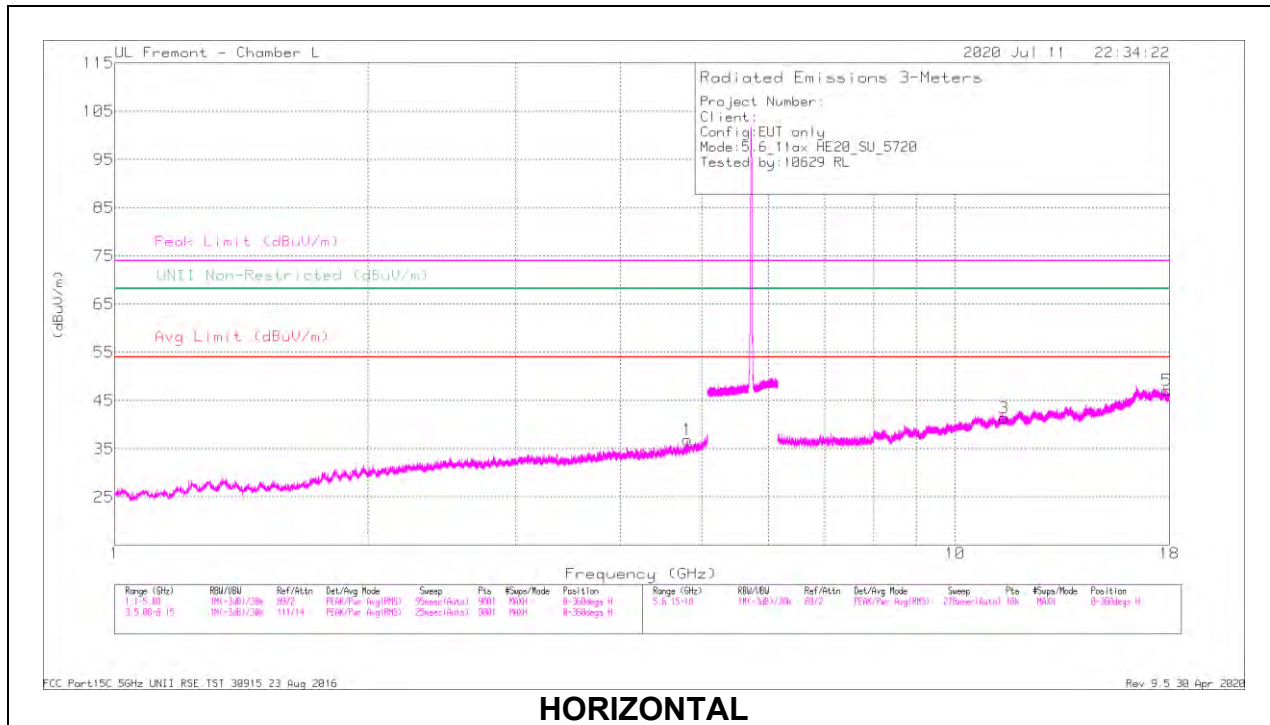

HORIZONTAL

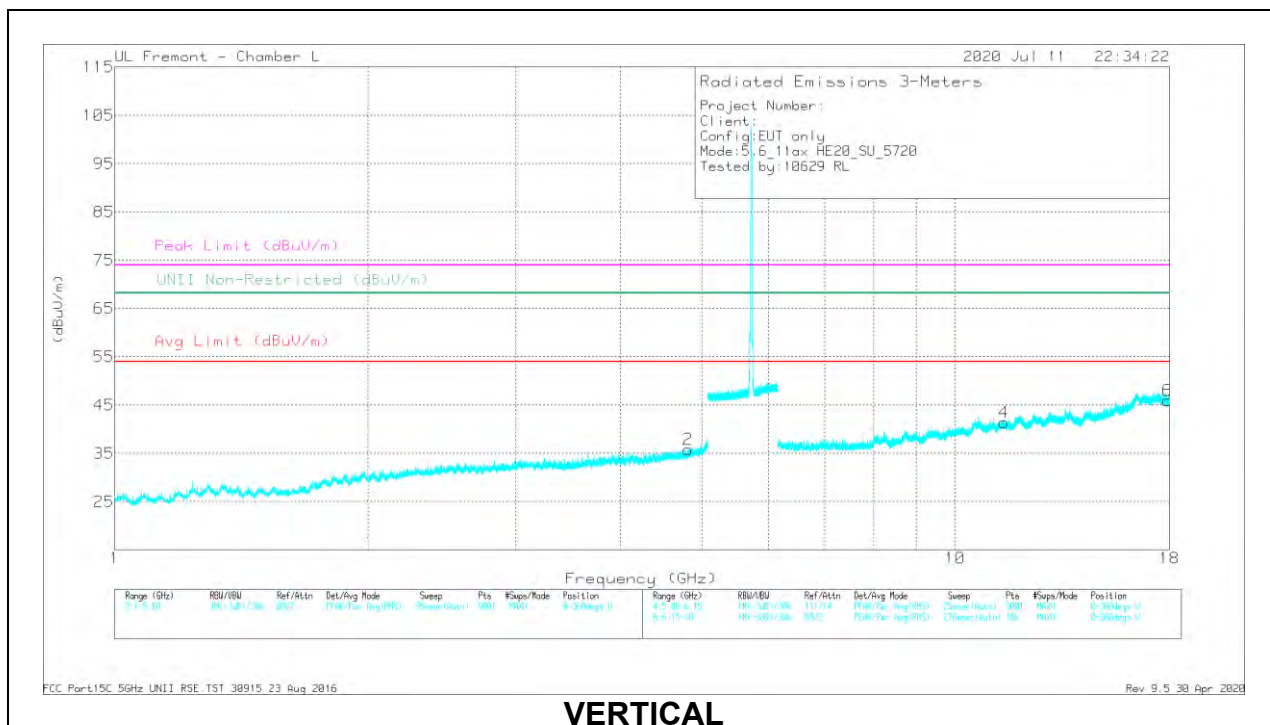

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Dot	AF 344 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.80894	36.51	PK-U	34.2	-27.2	43.51	-	-	74	-30.49	-	-	232	218	H
	* 4.80942	26.42	ADR	34.2	-27.2	33.42	54	-20.58	-	-	-	-	232	218	H
2	* 4.81443	36.63	PK-U	34.2	-27.2	43.63	-	-	74	-30.37	-	-	50	170	V
	* 4.81563	25.82	ADR	34.2	-27.2	32.82	54	-21.18	-	-	-	-	50	170	V
3	* 11.43689	30.64	PK-U	38.1	-19.7	49.04	-	-	74	-24.96	-	-	276	291	H
	* 11.44092	19.88	ADR	38.1	-19.7	38.28	54	-15.72	-	-	-	-	276	291	H
5	* 17.86378	29.61	PK-U	41.4	-17.4	53.61	-	-	74	-20.39	-	-	165	320	H
	* 17.86319	19.26	ADR	41.4	-17.4	43.26	54	-10.74	-	-	-	-	165	320	H
4	* 11.43976	30.33	PK-U	38.1	-19.7	48.73	-	-	74	-25.27	-	-	98	222	V
	* 11.44142	20.48	ADR	38.1	-19.7	38.88	54	-15.12	-	-	-	-	98	222	V
6	* 17.89531	29.38	PK-U	41.4	-17.5	53.28	-	-	74	-20.72	-	-	286	139	V
	* 17.89531	18.89	ADR	41.4	-17.5	42.79	54	-11.21	-	-	-	-	286	139	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

2TX ANT 5 + ANT 6 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

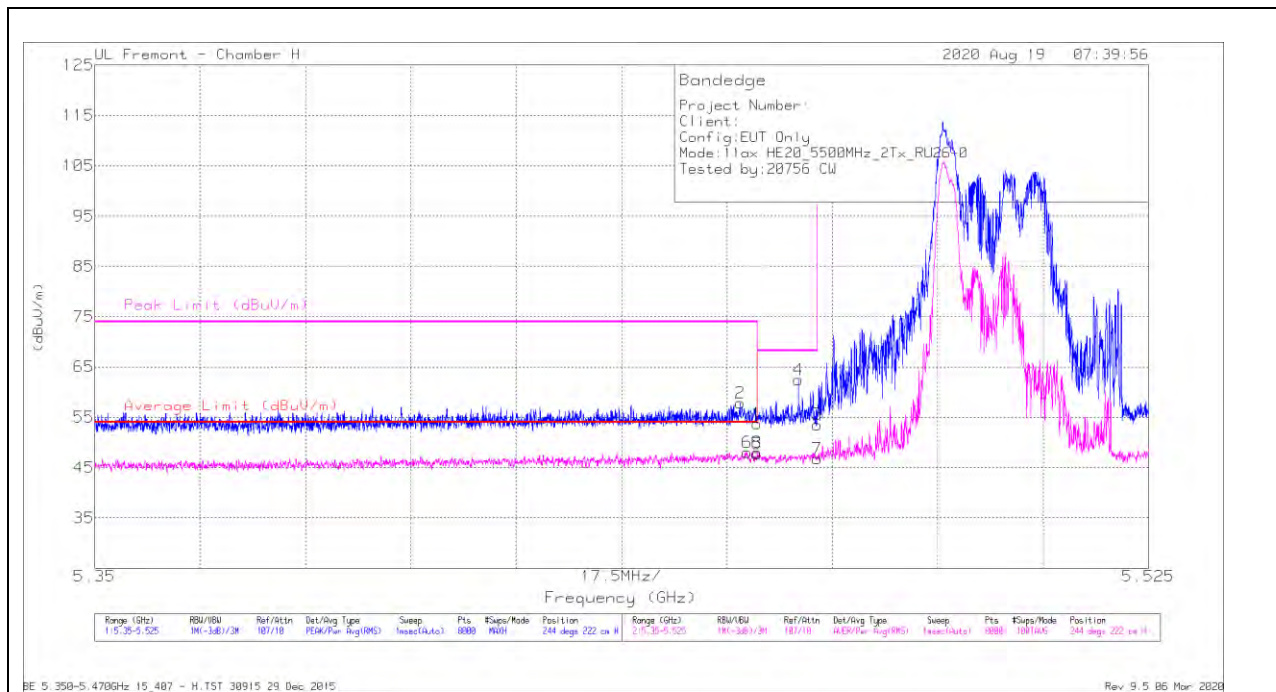

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CbI/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.44	Pk	35.2	-20.9	53.74	-	-	74	-20.26	244	222	H
2	* 5.45718	43.44	Pk	35.3	-20.9	57.84	-	-	74	-16.16	244	222	H
5	* 5.45998	33.45	RMS	35.2	-20.9	47.75	54	-6.25	-	-	244	222	H
6	* 5.4583	33.63	RMS	35.3	-20.9	48.03	54	-5.97	-	-	244	222	H
8	5.46002	33.66	RMS	35.2	-20.9	47.96	-	-	-	-	244	222	H
4	5.46687	48.12	Pk	35.3	-20.9	62.52	-	-	68.2	-5.68	244	222	H
3	5.46998	39.26	Pk	35.3	-21	53.56	-	-	68.2	-14.64	244	222	H
7	5.46998	32.52	RMS	35.3	-21	46.82	-	-	-	-	244	222	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

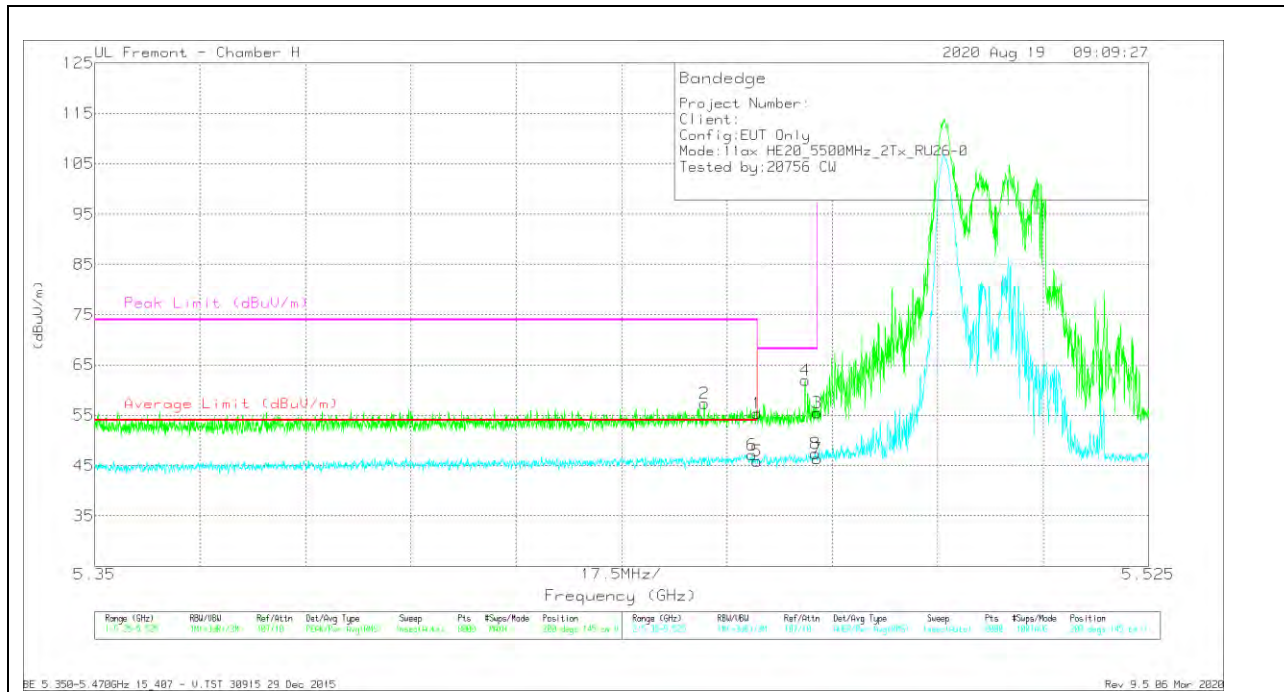


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbll/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.12	Pk	35.2	-20.9	55.42	-	-	74	-18.58	200	145	V
2	* 5.45123	43.1	Pk	35.2	-20.9	57.4	-	-	74	-16.6	200	145	V
5	* 5.45998	31.62	RMS	35.2	-20.9	45.92	54	-8.08	-	-	200	145	V
6	* 5.45917	32.78	RMS	35.3	-20.9	47.18	54	-6.82	-	-	200	145	V
4	5.46797	47.52	Pk	35.3	-20.9	61.92	-	-	68.2	-6.28	200	145	V
8	5.46969	33.14	RMS	35.3	-21	47.44	-	-	-	-	200	145	V
3	5.46998	41.17	Pk	35.3	-21	55.47	-	-	68.2	-12.73	200	145	V
7	5.46998	32.11	RMS	35.3	-21	46.41	-	-	-	-	200	145	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

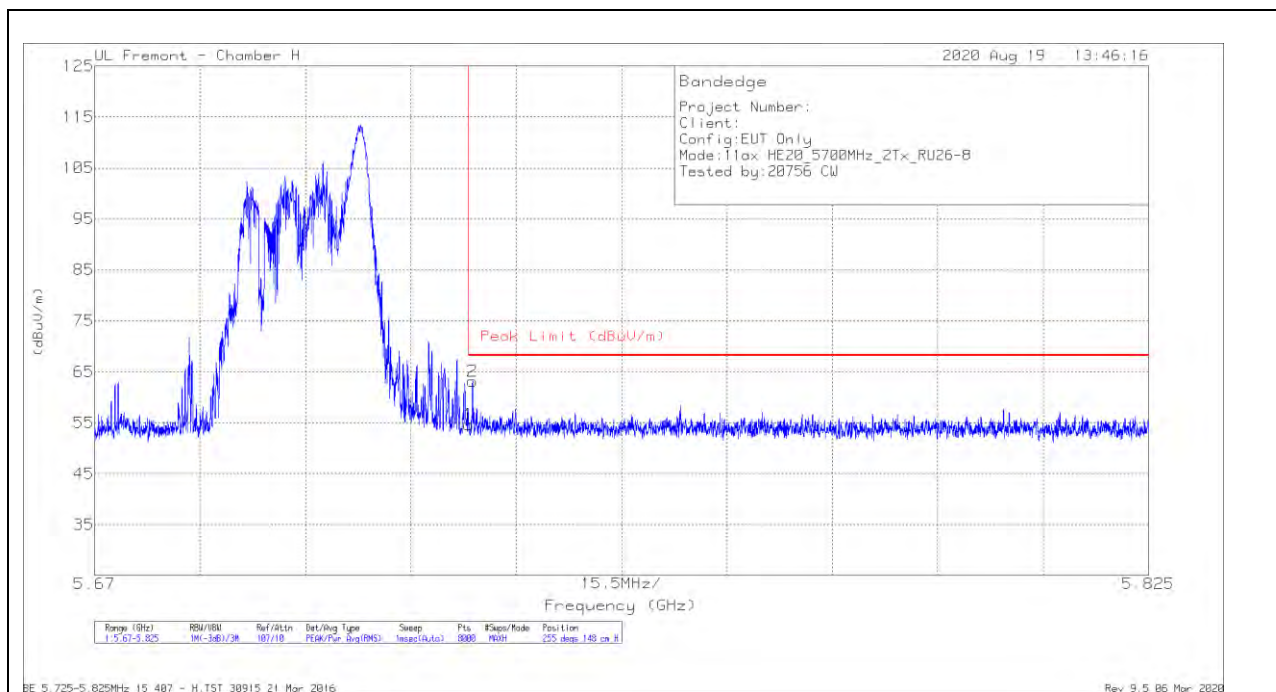


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.78	Pk	35	-21.1	54.68	68.2	-13.52	255	148	H
2	5.72557	49.36	Pk	34.9	-21.1	63.16	68.2	-5.04	255	148	H

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

VERTICAL RESULT

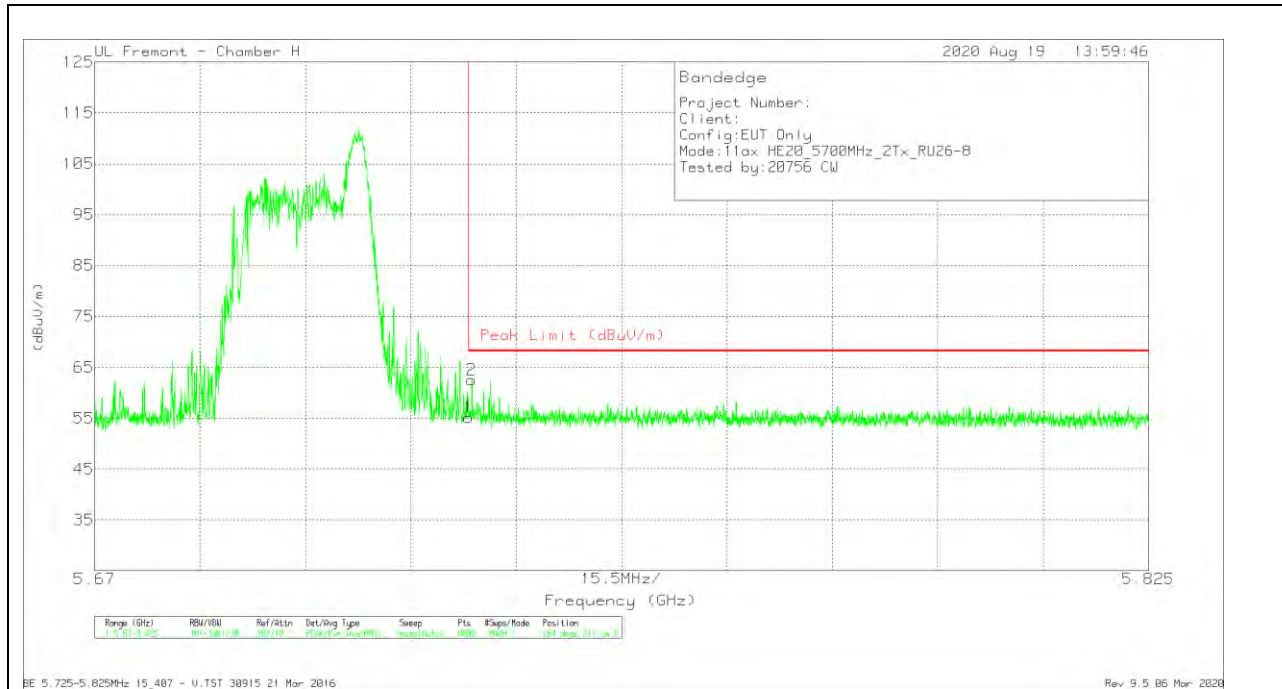


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	41.28	Pk	35	-21.1	55.18	68.2	-13.02	264	211	V
2	5.72548	48.7	Pk	34.9	-21.1	62.5	68.2	-5.7	264	211	V

Pk - Peak detector


2TX ANT 5 + ANT 6 OFDMA MODE – 26 Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

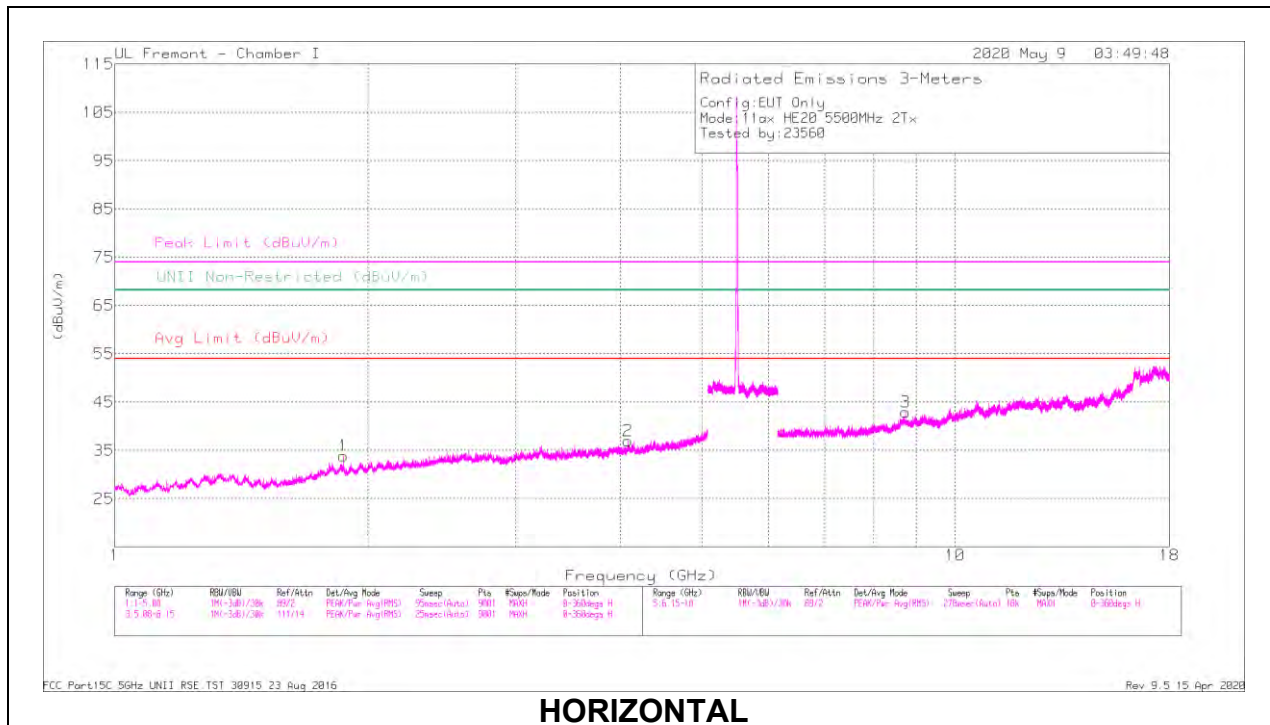

HORIZONTAL

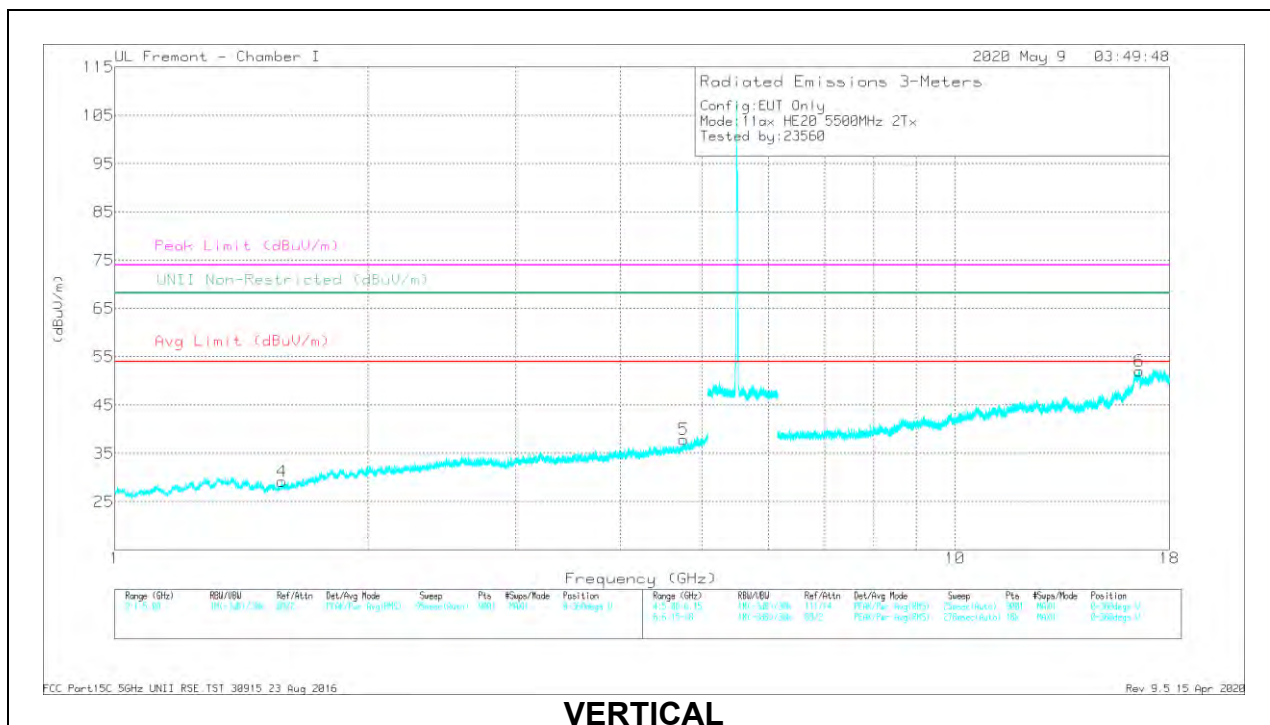


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.86978	38.51	PK-U	30.8	-28.8	40.51	-	-	-	-	68.2	-27.69	94	322	H
2	* 4.08464	36.58	PK-U	33.4	-24.3	45.68	-	-	74	-28.32	-	-	52	110	H
	* 4.08331	25.83	ADR	33.4	-24.4	34.83	54	-19.17	-	-	-	-	52	110	H
4	* 1.58139	38.85	PK-U	27.9	-29.4	37.15	-	-	74	-36.85	-	-	109	196	V
	* 1.58227	28.38	ADR	27.9	-29.3	28.98	54	-27.02	-	-	-	-	109	196	V
5	* 4.7543	34.6	PK-U	34	-22.9	45.7	-	-	74	-28.3	-	-	44	113	V
	* 4.75473	24.41	ADR	34.1	-22.9	35.61	54	-18.39	-	-	-	-	44	113	V
3	8.73864	29.95	PK-U	36	-16.5	49.45	-	-	-	-	68.2	-18.75	253	200	H
6	16.57987	29.52	PK-U	41.3	-11.7	59.12	-	-	-	-	68.2	-9.08	281	339	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

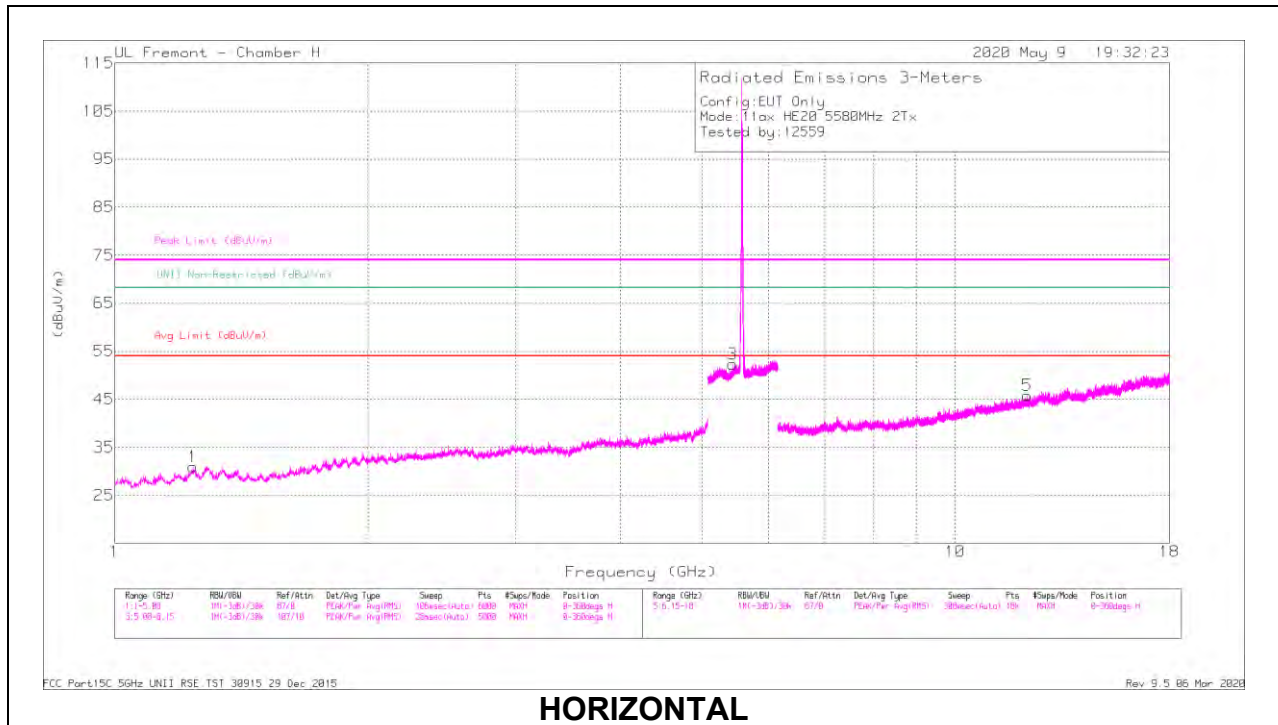

HORIZONTAL

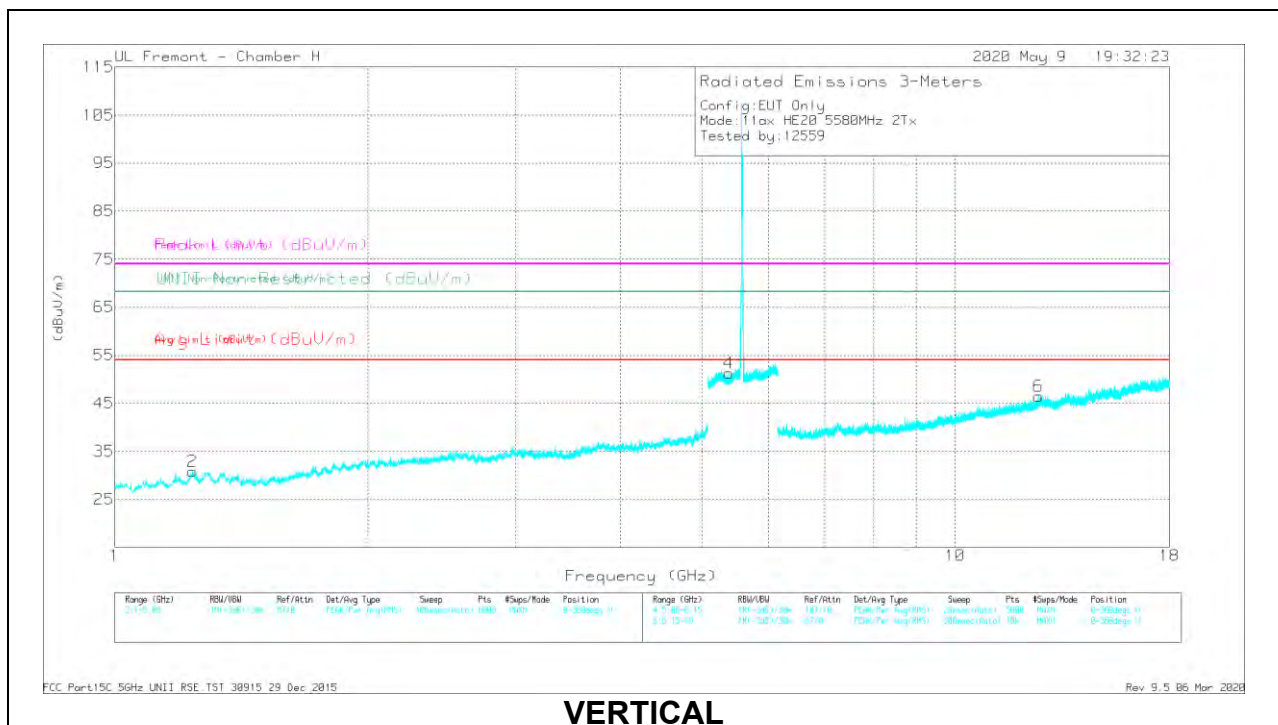


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBµV)	Det	AF T663 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNII Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.23967	44.77	PK-U	28.8	-35.4	38.17	-	-	74	-35.83	-	-	59	203	H
	* 1.23954	33.15	ADR	28.8	-35.4	26.55	54	-27.45	-	-	-	-	59	203	H
2	* 1.23629	44.78	PK-U	28.8	-35.4	38.18	-	-	74	-35.82	-	-	180	198	V
	* 1.2381	33.15	ADR	28.8	-35.4	26.55	54	-27.45	-	-	-	-	180	198	V
3	* 5.43668	44.02	PK-U	35.1	-20.8	58.32	-	-	74	-15.68	-	-	210	173	H
	* 5.43557	32.8	ADR	35.1	-20.8	47.1	54	-6.9	-	-	-	-	210	173	H
4	* 5.38174	44.63	PK-U	35	-20.9	58.73	-	-	74	-15.27	-	-	290	340	V
	* 5.38138	32.42	ADR	35	-20.9	46.52	54	-7.48	-	-	-	-	290	340	V
5	* 12.1856	36.98	PK-U	38.9	-23.8	52.08	-	-	74	-21.92	-	-	315	286	H
	* 12.18539	25.75	ADR	38.9	-23.8	40.85	54	-13.15	-	-	-	-	315	286	H
6	* 12.56239	36.81	PK-U	39.5	-23.5	52.81	-	-	74	-21.19	-	-	351	191	V
	* 12.56229	25.95	ADR	39.5	-23.5	41.95	54	-12.05	-	-	-	-	351	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

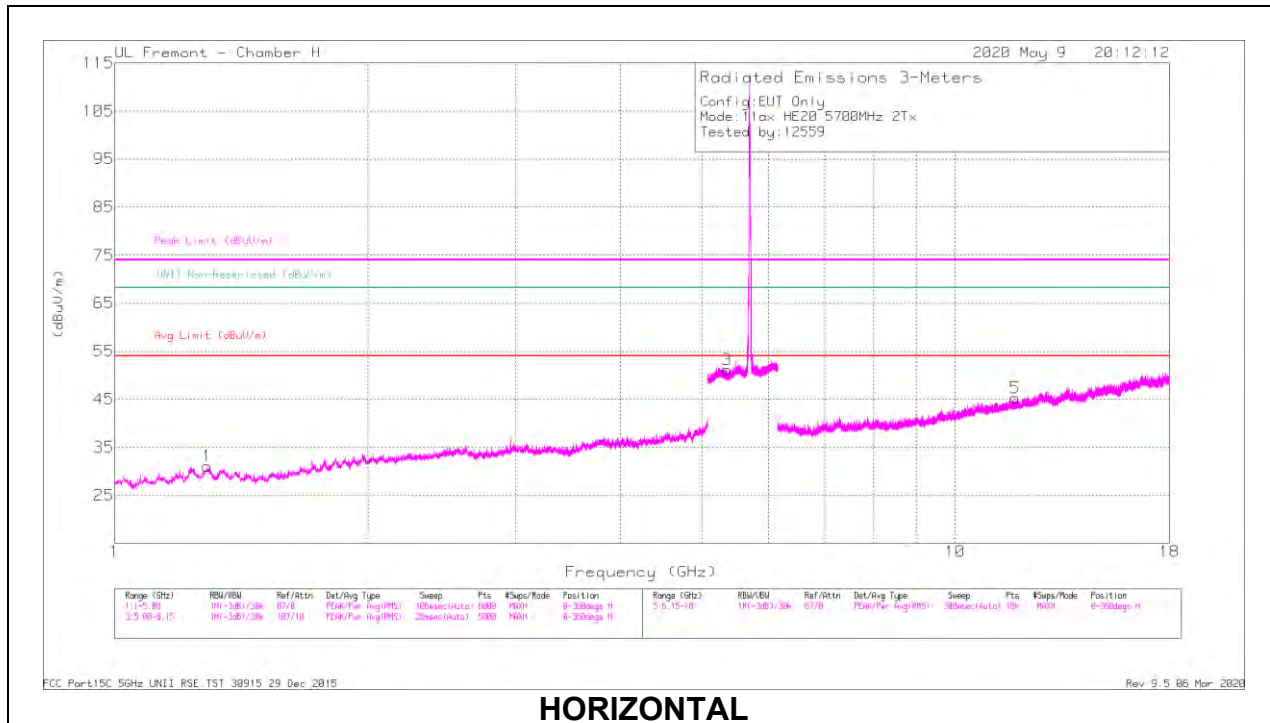

HORIZONTAL

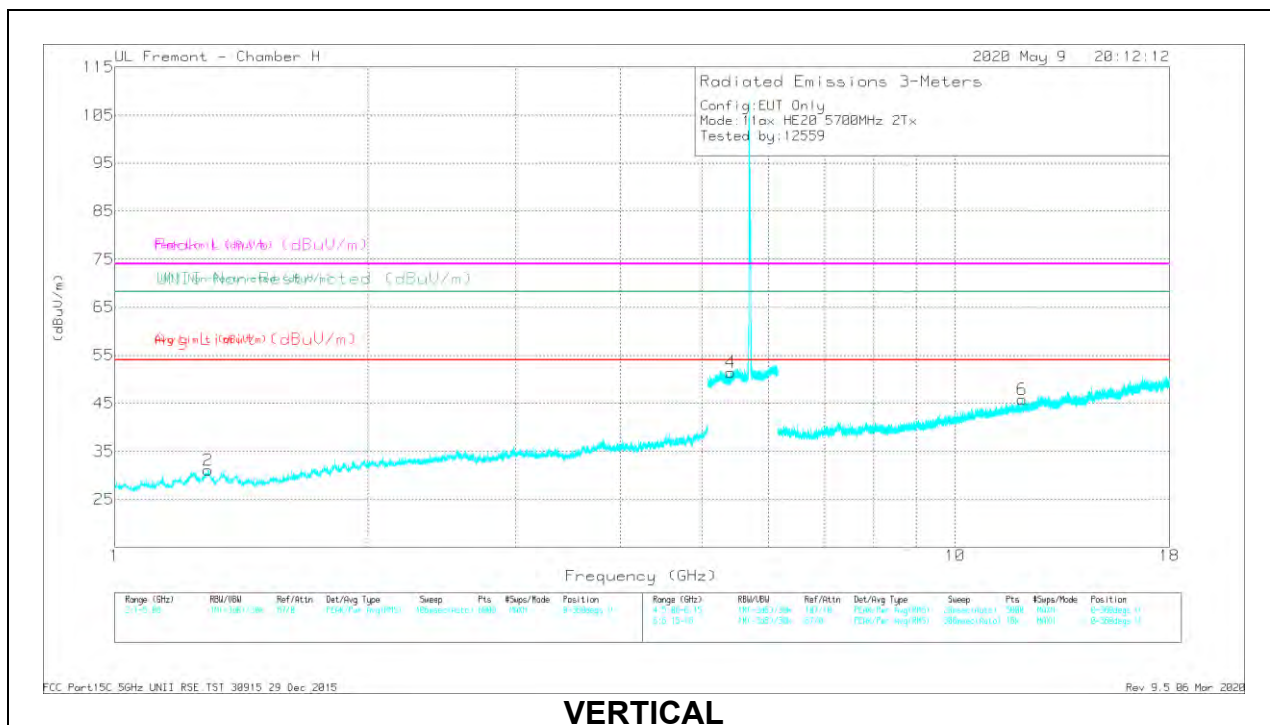


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBµV)	Det	AF T663 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNII Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.29167	44.69	PK-U	29.1	-35.1	38.69	-	-	74	-35.31	-	-	200	306	H
	* 1.28905	33	ADR	29.2	-35.1	27.1	54	-26.9	-	-	-	-	200	306	H
2	* 1.28998	44.52	PK-U	29.2	-35.1	38.62	-	-	74	-35.38	-	-	50	214	V
	* 1.29284	32.92	ADR	29	-35.1	26.82	54	-27.18	-	-	-	-	50	214	V
3	* 5.35589	43.52	PK-U	34.9	-20.9	57.52	-	-	74	-16.48	-	-	163	199	H
	* 5.35762	32.25	ADR	34.9	-20.9	46.25	54	-7.75	-	-	-	-	163	199	H
4	* 5.40652	44.07	PK-U	35	-20.8	58.27	-	-	74	-15.73	-	-	226	293	V
	* 5.40813	32.48	ADR	35	-20.8	46.68	54	-7.32	-	-	-	-	226	293	V
5	* 11.79963	37.36	PK-U	38.5	-23.9	51.96	-	-	74	-22.04	-	-	305	202	H
	* 11.7991	26.02	ADR	38.4	-23.9	40.52	54	-13.48	-	-	-	-	305	202	H
6	* 12.02046	36.9	PK-U	38.8	-23.7	52	-	-	74	-22	-	-	110	154	V
	* 12.01694	25.77	ADR	38.7	-23.8	40.67	54	-13.33	-	-	-	-	110	154	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

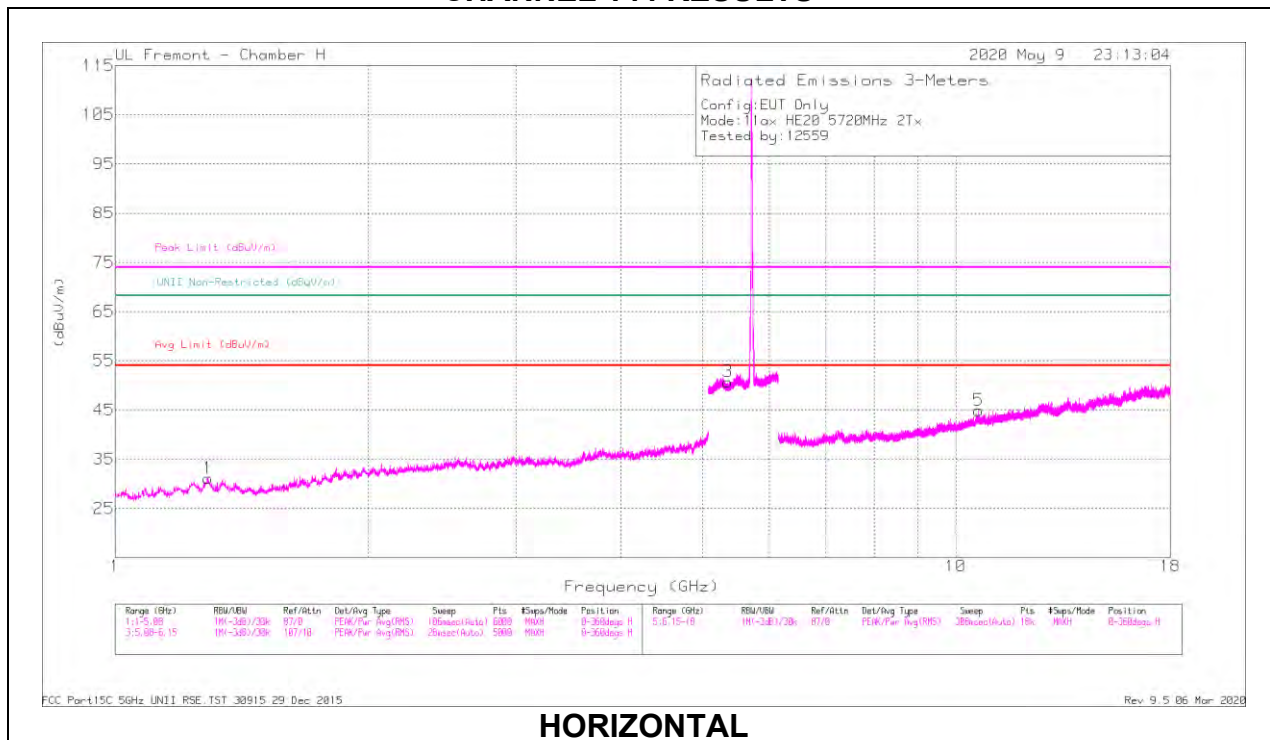

HORIZONTAL

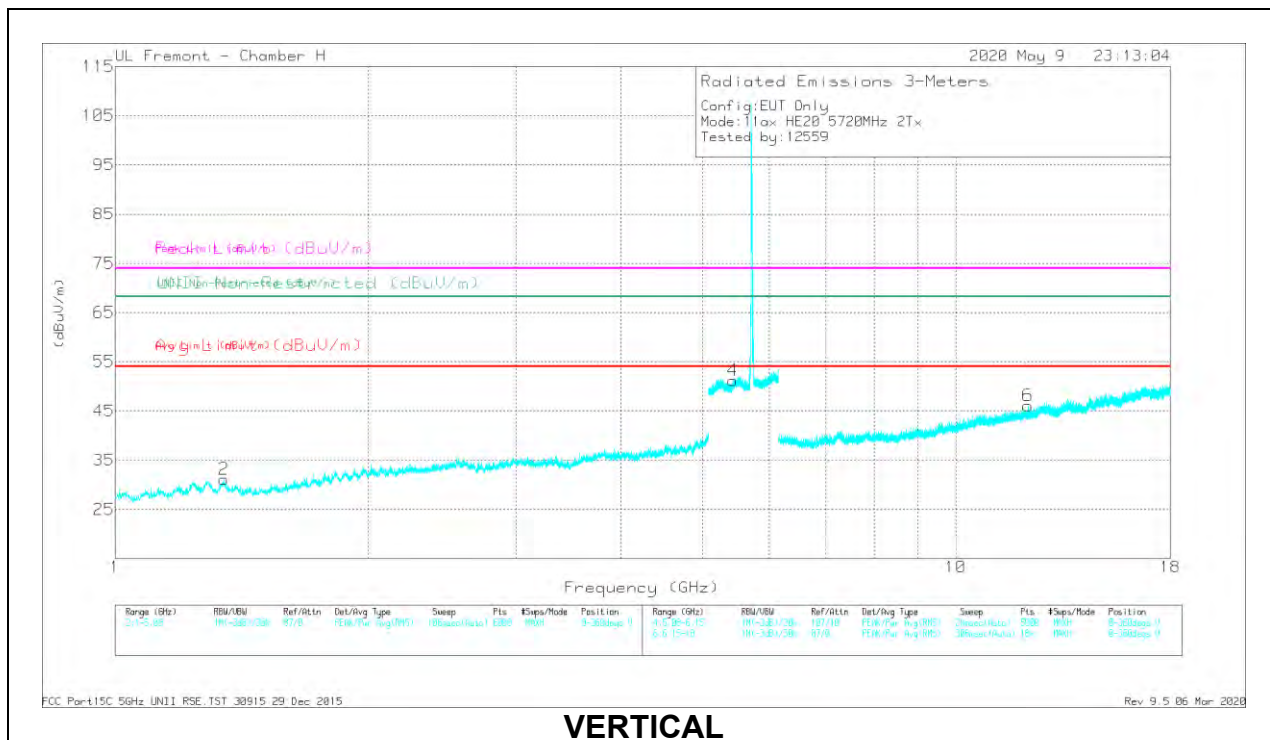

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBµV)	Det	AF T663 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNII Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.29121	44.94	PK-U	29.1	-35.1	38.94	-	-	74	-35.06	-	-	280	270	H
	* 1.2901	33.08	ADR	29.1	-35.1	27.08	54	-26.92	-	-	-	-	280	270	H
2	* 1.34659	45.78	PK-U	29	-35.2	39.58	-	-	74	-34.42	-	-	98	131	V
	* 1.34528	33.23	ADR	28.9	-35.2	26.93	54	-27.07	-	-	-	-	98	131	V
3	* 5.35716	43.8	PK-U	34.9	-20.9	57.8	-	-	74	-16.2	-	-	184	303	H
	* 5.35947	32.31	ADR	34.9	-20.9	46.31	54	-7.69	-	-	-	-	184	303	H
4	* 5.42877	43.93	PK-U	35.1	-20.9	58.13	-	-	74	-15.87	-	-	240	321	V
	* 5.43086	32.59	ADR	35	-20.9	46.69	54	-7.31	-	-	-	-	240	321	V
5	* 10.63909	37.31	PK-U	37.6	-23.8	51.11	-	-	74	-22.89	-	-	303	156	H
	* 10.64189	26.24	ADR	37.6	-23.9	39.94	54	-14.06	-	-	-	-	303	156	H
6	* 12.18604	36.79	PK-U	38.9	-23.8	51.89	-	-	74	-22.11	-	-	142	200	V
	* 12.18733	25.79	ADR	38.9	-23.8	40.89	54	-13.11	-	-	-	-	142	200	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.1.17. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.6 GHz BAND

1TX ANT 5 – SU, RU Index 65

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

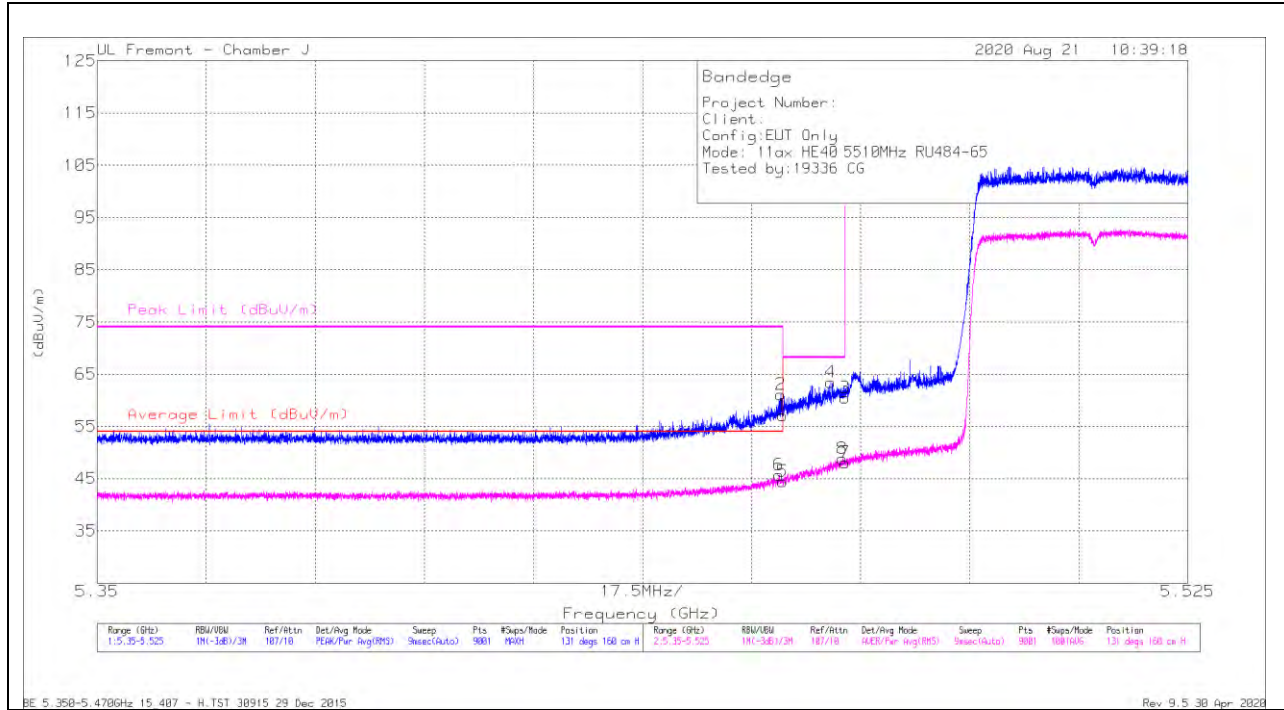

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	44.24	Pk	33	-20.1	57.14	-	-	74	-16.86	131	160	H
2	* 5.45966	48.14	Pk	33	-20.1	61.04	-	-	74	-12.96	131	160	H
3	5.46999	47.46	Pk	33.1	-20.1	60.46	-	-	68.2	-7.74	131	160	H
4	5.46768	50.58	Pk	33	-20.1	63.48	-	-	68.2	-4.72	131	160	H
5	* 5.45999	31.58	RMS	33	-20.1	44.48	54	-9.52	-	-	131	160	H
6	* 5.45937	32.81	RMS	33	-20.1	45.71	54	-8.29	-	-	131	160	H
7	5.46999	35.09	RMS	33.1	-20.1	48.09	-	-	-	-	131	160	H
8	5.46954	35.85	RMS	33.1	-20.1	48.85	-	-	-	-	131	160	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

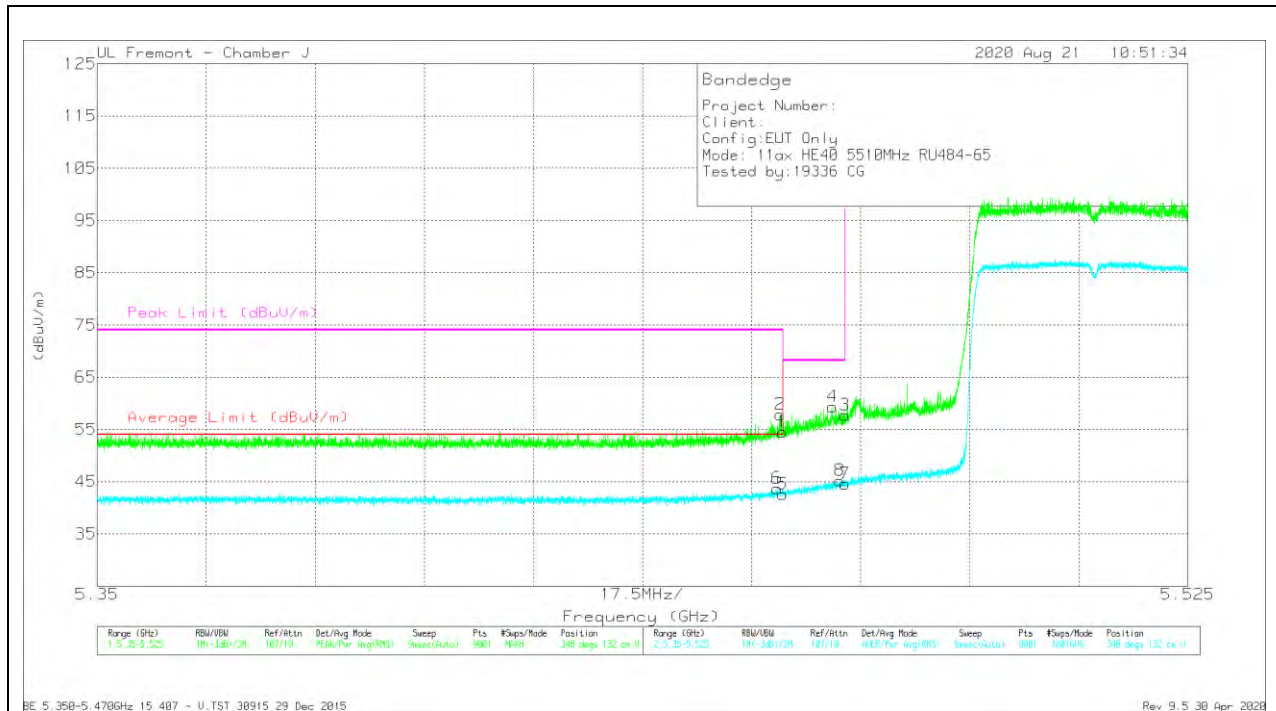


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/CbW/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	41.61	Pk	33	-20.1	54.51	-	-	74	-19.49	348	132	V
2	* 5.45963	44.96	Pk	33	-20.1	57.86	-	-	74	-16.14	348	132	V
3	5.46999	44.69	Pk	33.1	-20.1	57.69	-	-	68.2	-10.51	348	132	V
4	5.46799	46.48	Pk	33	-20.1	59.38	-	-	68.2	-8.82	348	132	V
5	* 5.45999	29.73	RMS	33	-20.1	42.63	54	-11.37	-	-	348	132	V
6	* 5.45912	30.86	RMS	33	-20.1	43.76	54	-10.24	-	-	348	132	V
7	5.46999	31.63	RMS	33.1	-20.1	44.63	-	-	-	-	348	132	V
8	5.46917	32.18	RMS	33.1	-20.1	45.18	-	-	-	-	348	132	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

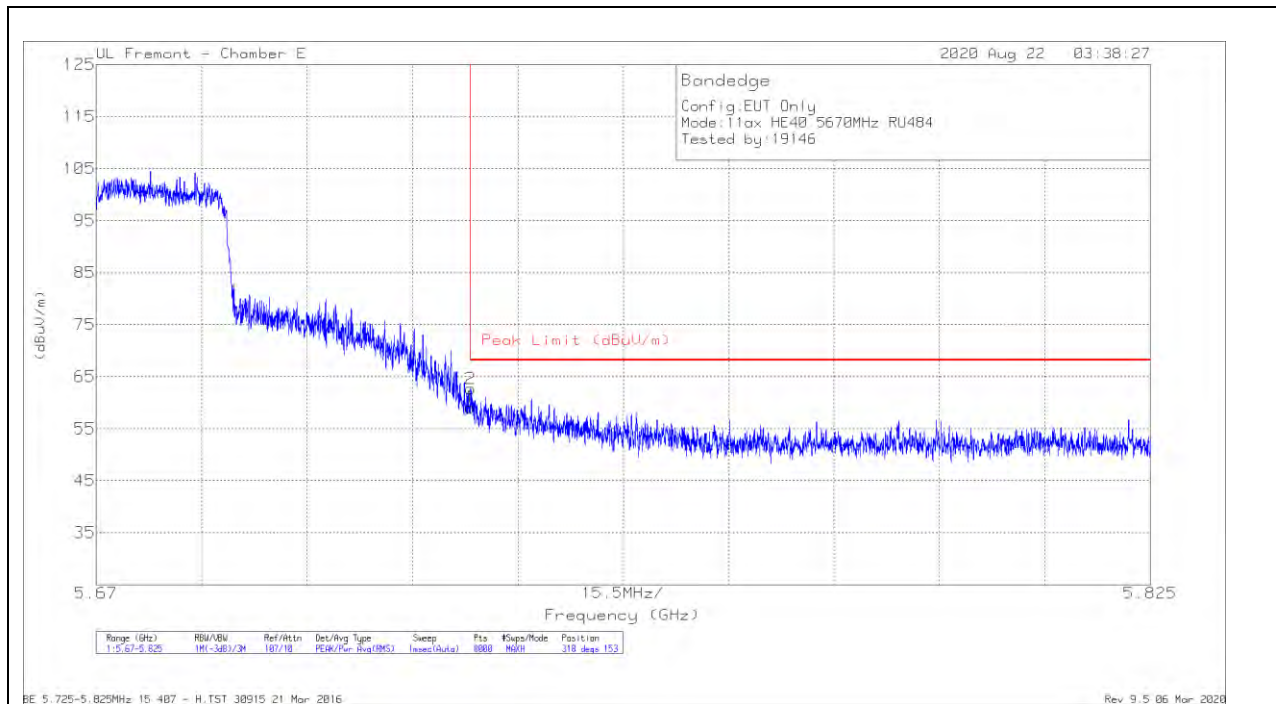

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.6	Pk	34.7	-21.2	59.1	68.2	-9.1	318	153	H
2	5.72505	49.19	Pk	34.7	-21.2	62.69	68.2	-5.51	318	153	H

Pk - Peak detector

VERTICAL RESULT

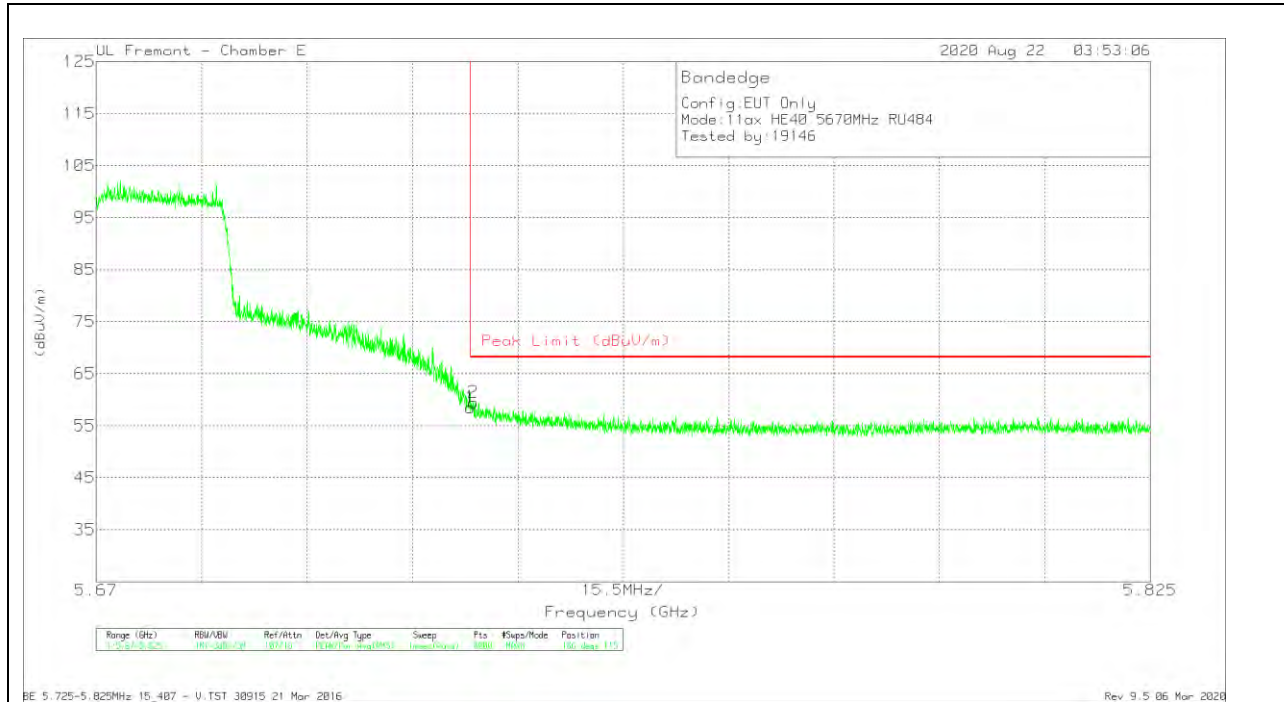


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.02	Pk	34.7	-21.2	58.52	68.2	-9.68	186	115	V
2	5.72544	45.97	Pk	34.7	-21.2	59.47	68.2	-8.73	186	115	V

Pk - Peak detector

1TX ANT 5 – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

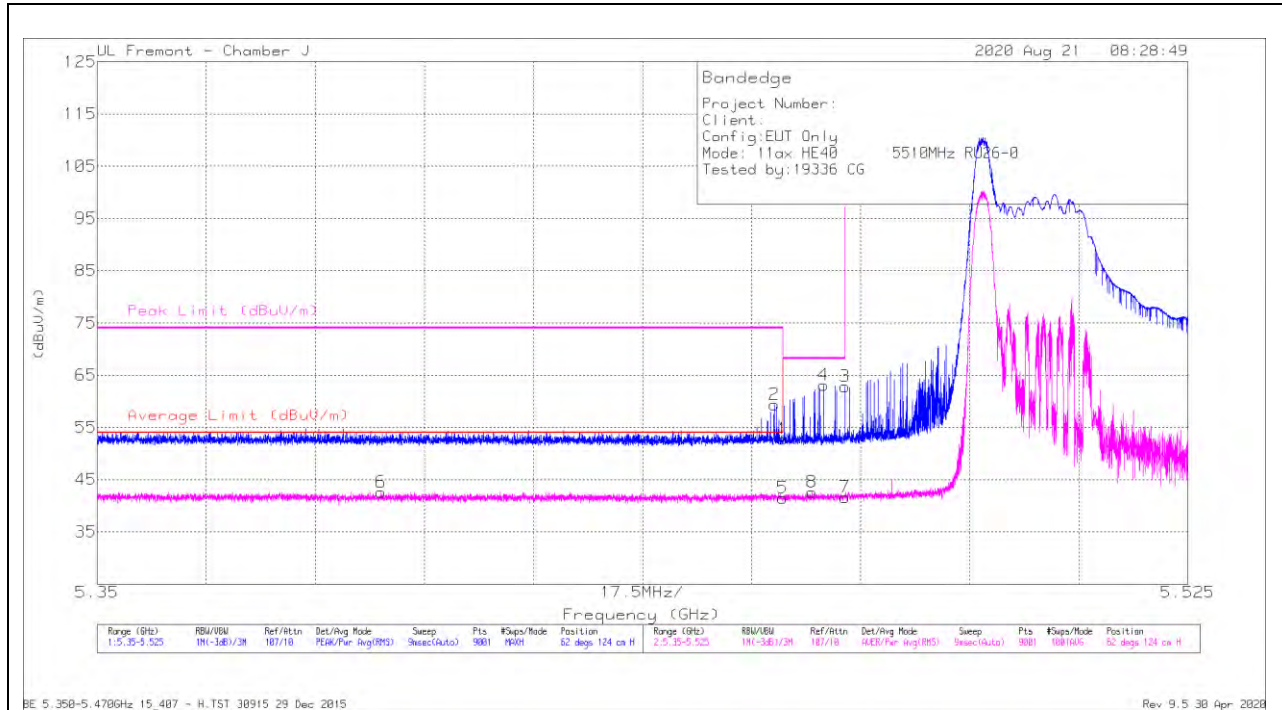

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/CbU/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	39.83	Pk	33	-20.1	52.73	-	-	74	-21.27	62	124	H
2	* 5.45865	46.5	Pk	33	-20.1	59.4	-	-	74	-14.6	62	124	H
3	5.46999	49.78	Pk	33.1	-20.1	62.78	-	-	68.2	-5.42	62	124	H
4	5.46655	50.16	Pk	33	-20.1	63.06	-	-	68.2	-5.14	62	124	H
5	* 5.45999	28.55	RMS	33	-20.1	41.45	54	-12.55	-	-	62	124	H
6	* 5.39554	29.75	RMS	33.1	-20.2	42.65	54	-11.35	-	-	62	124	H
7	5.46999	28.57	RMS	33.1	-20.1	41.57	-	-	-	-	62	124	H
8	5.46466	29.7	RMS	33	-20.1	42.6	-	-	-	-	62	124	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

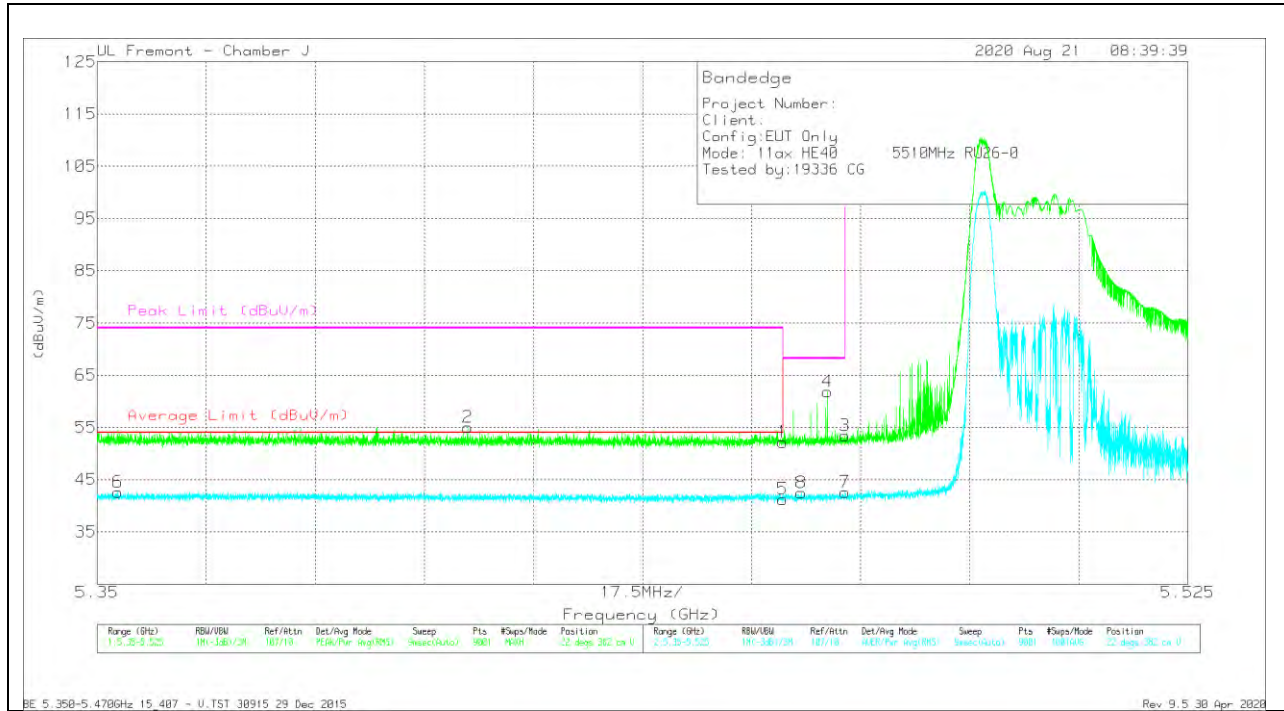


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/CbW/Fit/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	39.26	Pk	33	-20.1	52.16	-	-	74	-21.84	22	382	V
2	* 5.4095	42.22	Pk	33	-20.2	55.02	-	-	74	-18.98	22	382	V
3	5.46999	40.36	Pk	33.1	-20.1	53.36	-	-	68.2	-14.84	22	382	V
4	5.46713	48.89	Pk	33	-20.1	61.79	-	-	68.2	-6.41	22	382	V
5	* 5.45999	28.36	RMS	33	-20.1	41.26	54	-12.74	-	-	22	382	V
6	* 5.35332	29.74	RMS	33.3	-20.4	42.64	54	-11.36	-	-	22	382	V
7	5.46999	29.54	RMS	33.1	-20.1	42.54	-	-	-	-	22	382	V
8	5.46297	29.54	RMS	33	-20.1	42.44	-	-	-	-	22	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANT 5 – 26 Tones, RU Index 17
BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

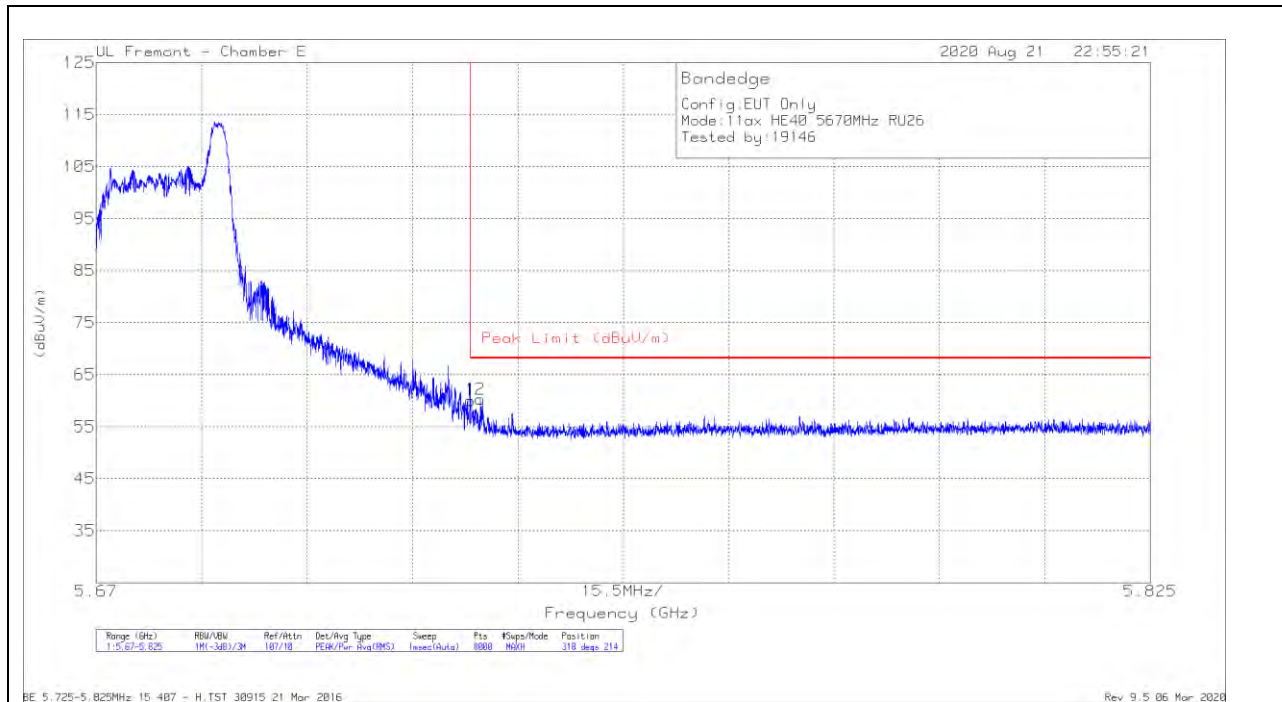

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.59	Pk	34.7	-21.2	60.09	68.2	-8.11	318	214	H
2	5.7265	46.78	Pk	34.7	-21.2	60.28	68.2	-7.92	318	214	H

Pk - Peak detector

VERTICAL RESULT

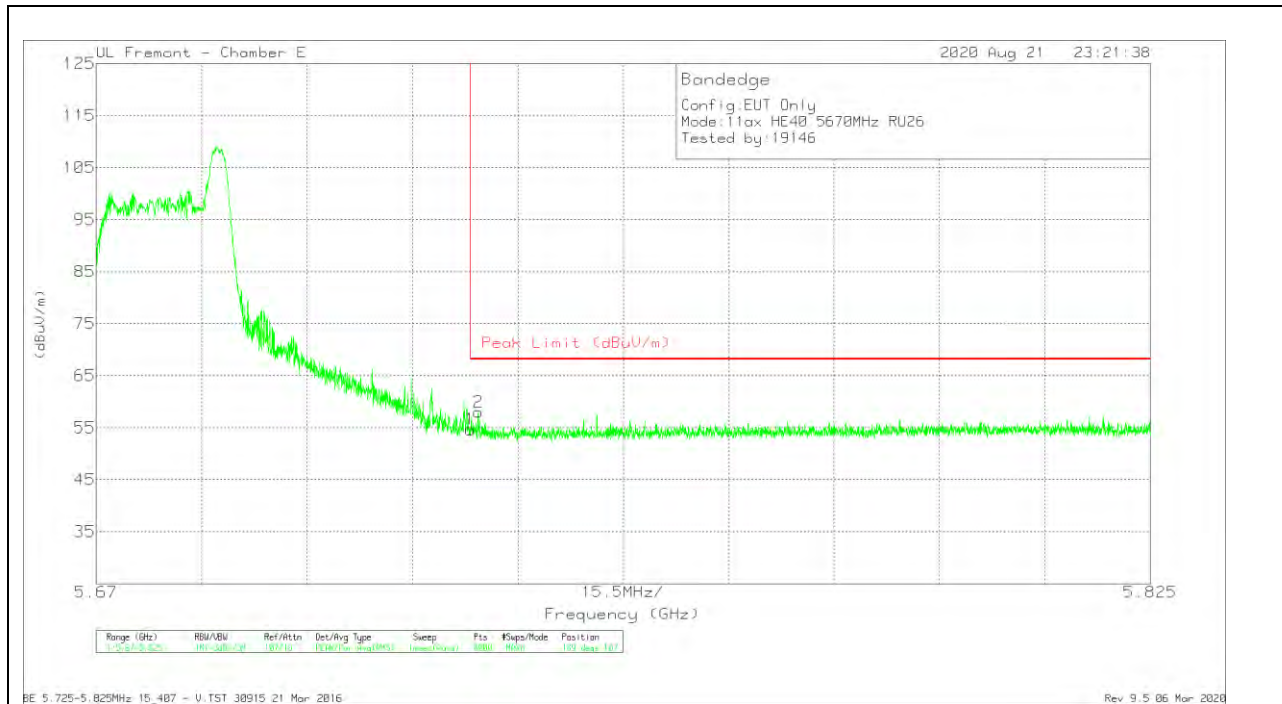


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	41.18	Pk	34.7	-21.2	54.68	68.2	-13.52	189	107	V
2	5.72619	44.47	Pk	34.7	-21.2	57.97	68.2	-10.23	189	107	V

Pk - Peak detector

1TX ANT 6 – SU, RU Index 65

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

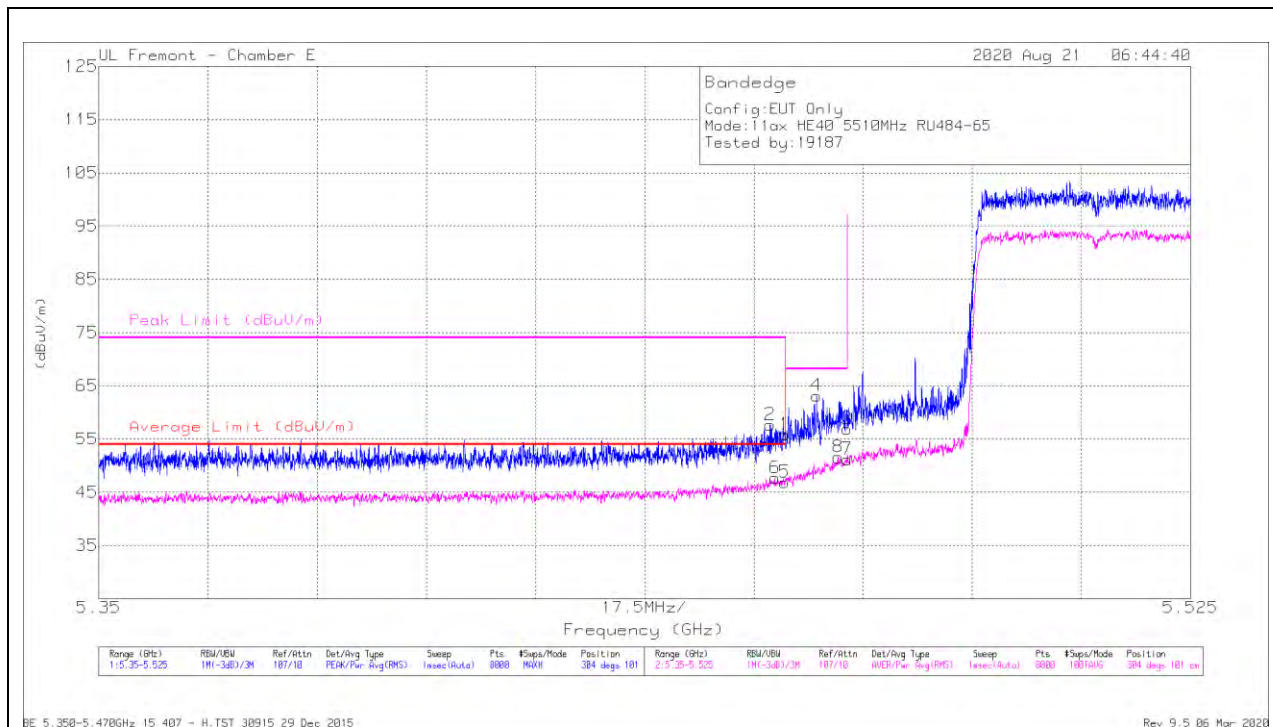

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	43.03	Pk	34.5	-21.7	55.83	-	-	74	-18.17	304	101	H
2	* 5.4576	44.75	Pk	34.6	-21.7	57.65	-	-	74	-16.35	304	101	H
5	* 5.45998	34.08	RMS	34.5	-21.7	46.88	54	-7.12	-	-	304	101	H
6	* 5.45836	34.8	RMS	34.6	-21.7	47.7	54	-6.3	-	-	304	101	H
4	5.46506	50.36	Pk	34.5	-21.7	63.16	-	-	68.2	-5.04	304	101	H
8	5.46847	38.78	RMS	34.5	-21.7	51.58	-	-	-	-	304	101	H
3	5.46998	44	Pk	34.6	-21.7	56.9	-	-	68.2	-11.3	304	101	H
7	5.46998	38.26	RMS	34.6	-21.7	51.16	-	-	-	-	304	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

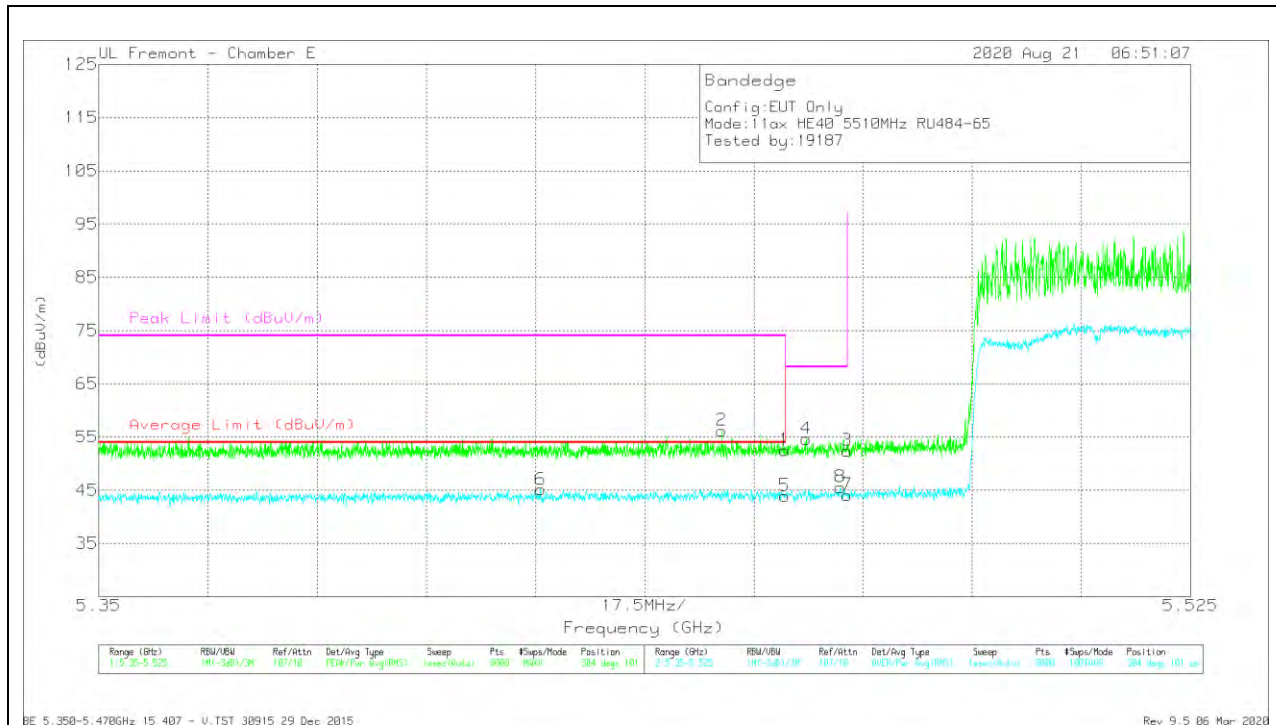


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.7	Pk	34.5	-21.7	52.5	-	-	74	-21.5	304	101	V
2	* 5.44983	43.41	Pk	34.5	-21.7	56.21	-	-	74	-17.79	304	101	V
5	* 5.45998	31.14	RMS	34.5	-21.7	43.94	54	-10.06	-	-	304	101	V
6	* 5.42082	32.43	RMS	34.5	-21.8	45.13	54	-8.87	-	-	304	101	V
4	5.46342	41.83	Pk	34.5	-21.7	54.63	-	-	68.2	-13.57	304	101	V
8	5.46886	32.77	RMS	34.5	-21.7	45.57	-	-	-	-	304	101	V
3	5.46998	39.53	Pk	34.6	-21.7	52.43	-	-	68.2	-15.77	304	101	V
7	5.46998	31.19	RMS	34.6	-21.7	44.09	-	-	-	-	304	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

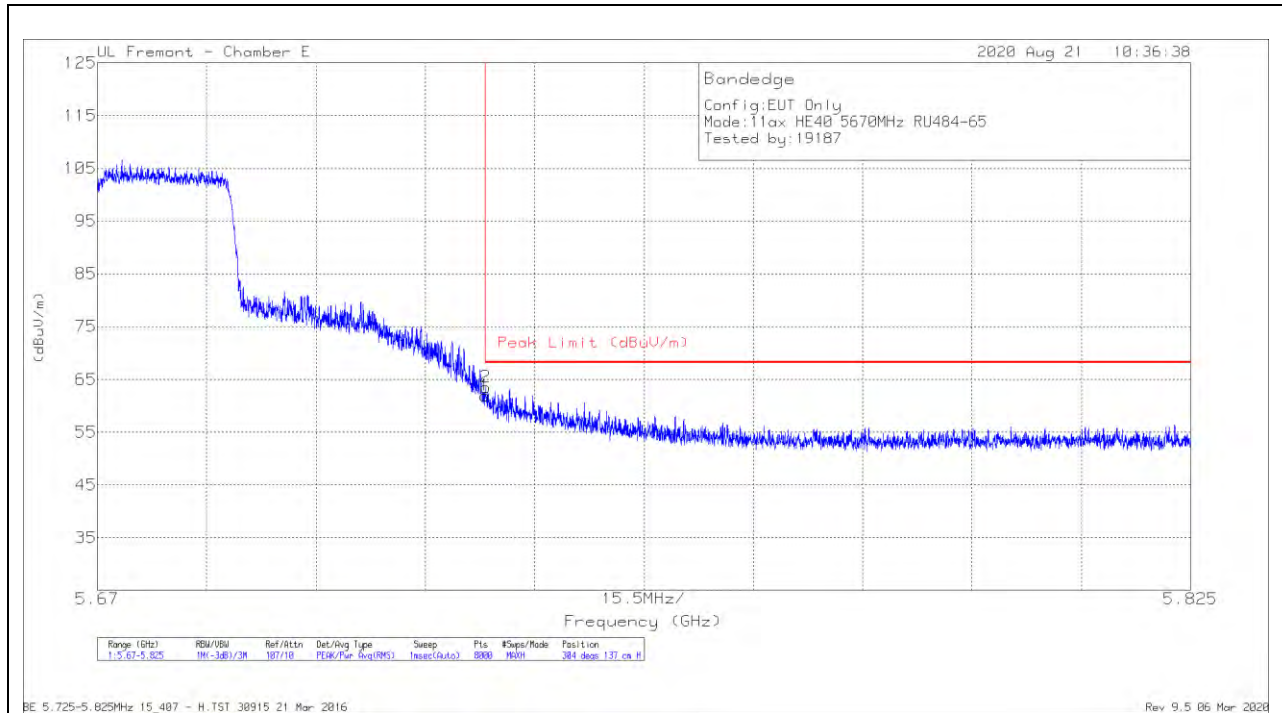

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	48.41	Pk	34.7	-21.2	61.91	68.2	-6.29	304	137	H
2	5.72507	50.02	Pk	34.7	-21.2	63.52	68.2	-4.68	304	137	H

Pk - Peak detector

VERTICAL RESULT

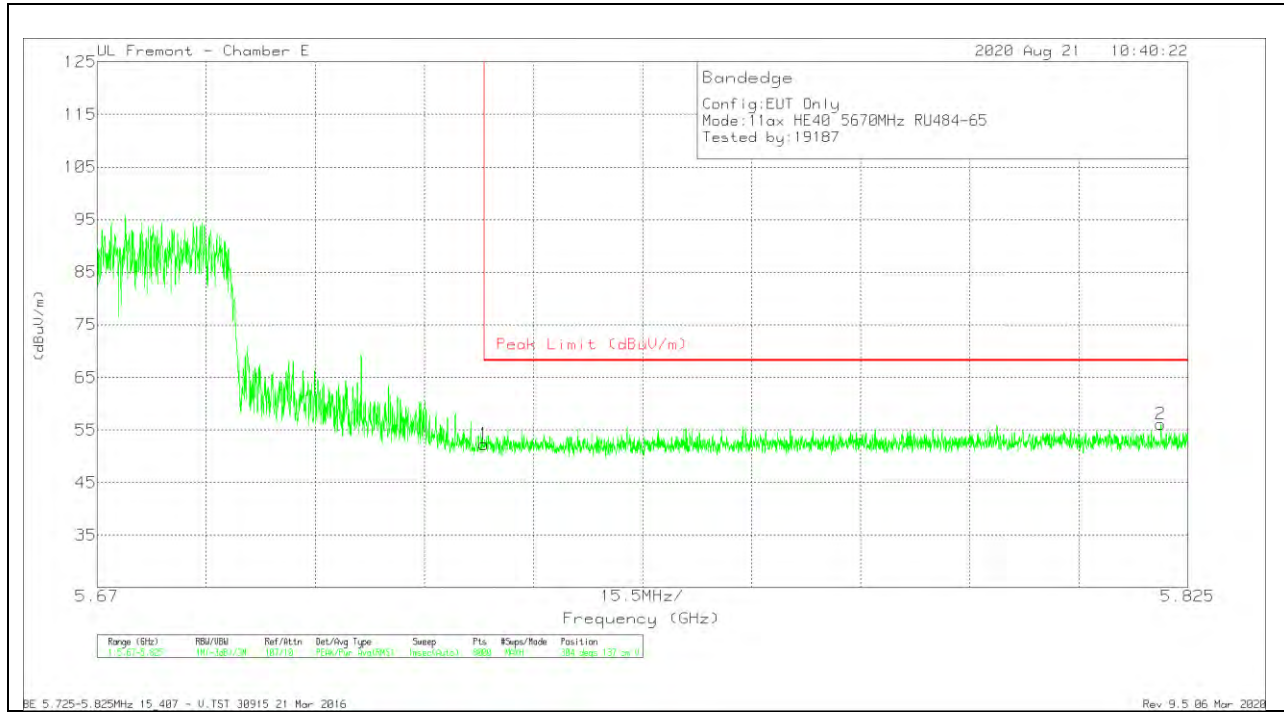


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	38.76	Pk	34.7	-21.2	52.26	68.2	-15.94	304	137	V
2	5.82116	41.89	Pk	34.9	-20.7	56.09	68.2	-12.11	304	137	V

Pk - Peak detector

1TX ANT 6 – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

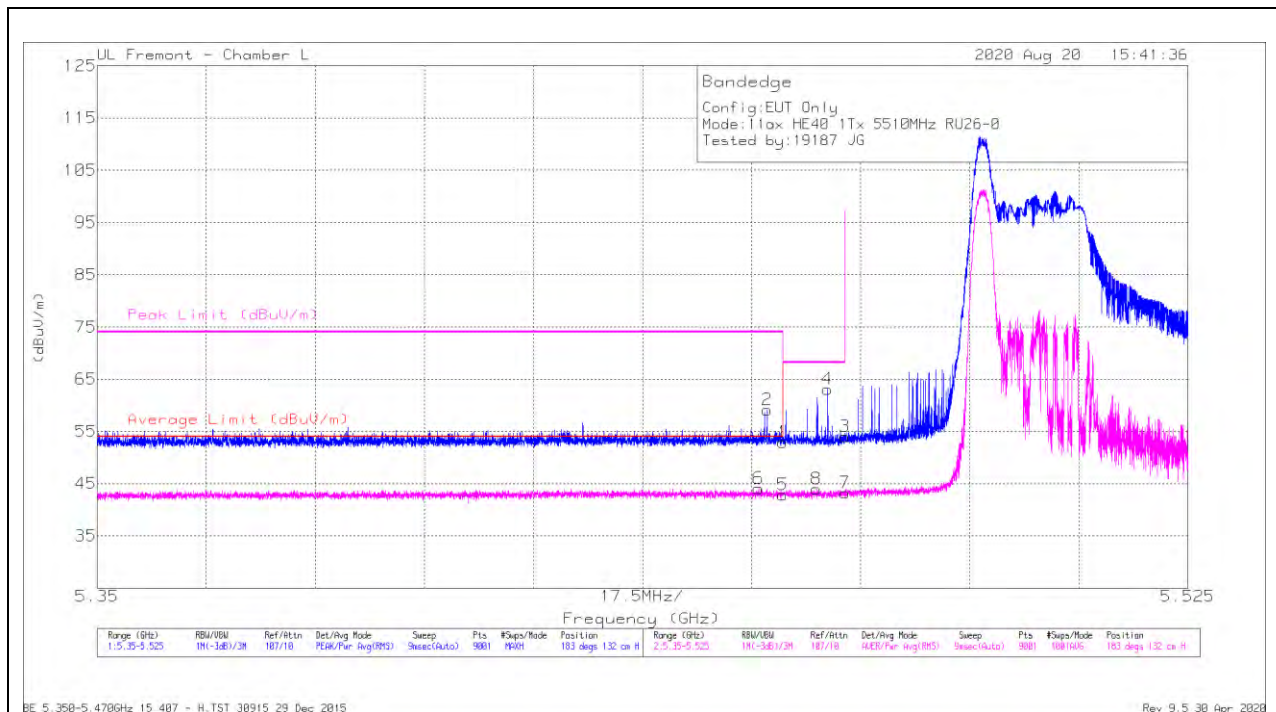

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbW/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	35.2	Pk	34.6	-16.9	52.9	-	-	74	-21.1	183	132	H
2	* 5.45749	41.29	Pk	34.7	-16.9	59.09	-	-	74	-14.91	183	132	H
3	5.46999	36.36	Pk	34.6	-16.9	54.06	-	-	68.2	-14.14	183	132	H
4	5.46723	45.37	Pk	34.6	-16.9	63.07	-	-	68.2	-5.13	183	132	H
5	* 5.45999	25.15	RMS	34.6	-16.9	42.85	54	-11.15	-	-	183	132	H
6	* 5.45611	26.33	RMS	34.7	-16.9	44.13	54	-9.87	-	-	183	132	H
7	5.46999	25.57	RMS	34.6	-16.9	43.27	-	-	-	-	183	132	H
8	5.46538	26.4	RMS	34.5	-16.9	44	-	-	-	-	183	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

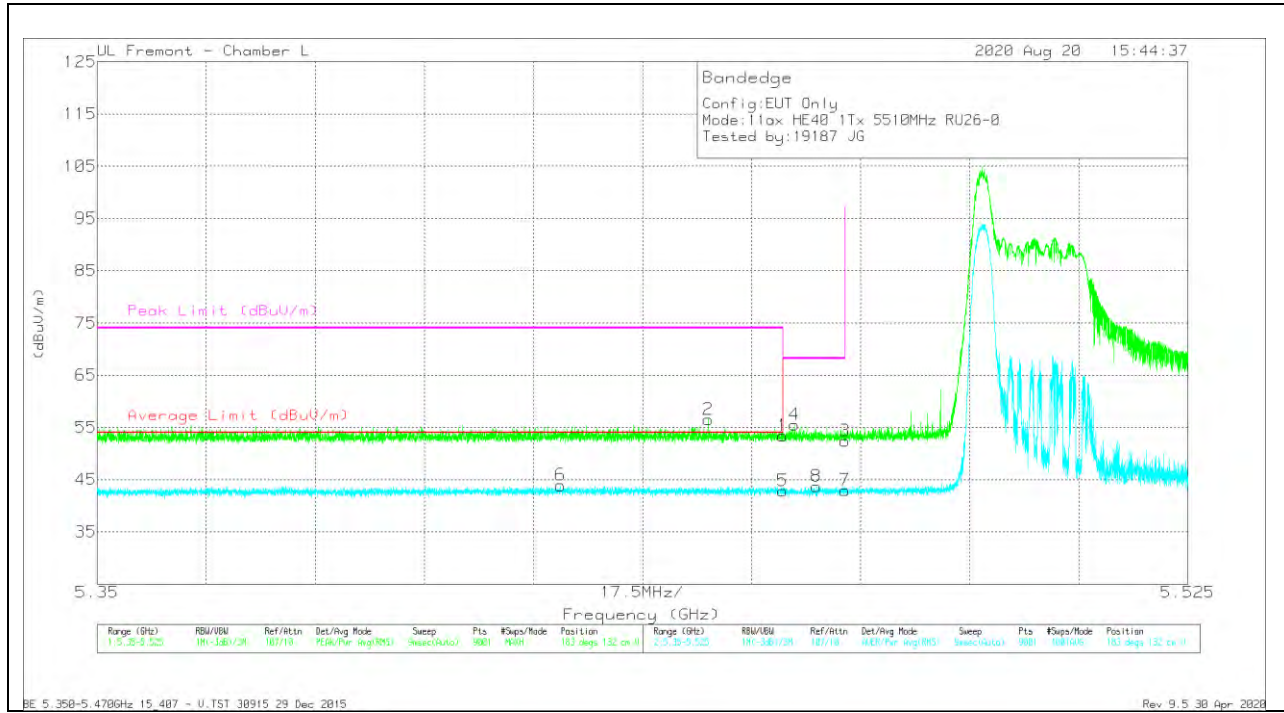


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	35.75	Pk	34.6	-16.9	53.45	-	-	74	-20.55	183	132	V
2	* 5.44804	38.79	Pk	34.6	-16.9	56.49	-	-	74	-17.51	183	132	V
3	5.46999	34.72	Pk	34.6	-16.9	52.42	-	-	68.2	-15.78	183	132	V
4	5.46186	37.77	Pk	34.6	-16.9	55.47	-	-	68.2	-12.73	183	132	V
5	* 5.45999	25.1	RMS	34.6	-16.9	42.8	54	-11.2	-	-	183	132	V
6	* 5.42433	26.2	RMS	34.6	-16.9	43.9	54	-10.1	-	-	183	132	V
7	5.46999	25.28	RMS	34.6	-16.9	42.98	-	-	-	-	183	132	V
8	5.46538	26.06	RMS	34.5	-16.9	43.66	-	-	-	-	183	132	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANT 6 – 26 Tones, RU Index 17
BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

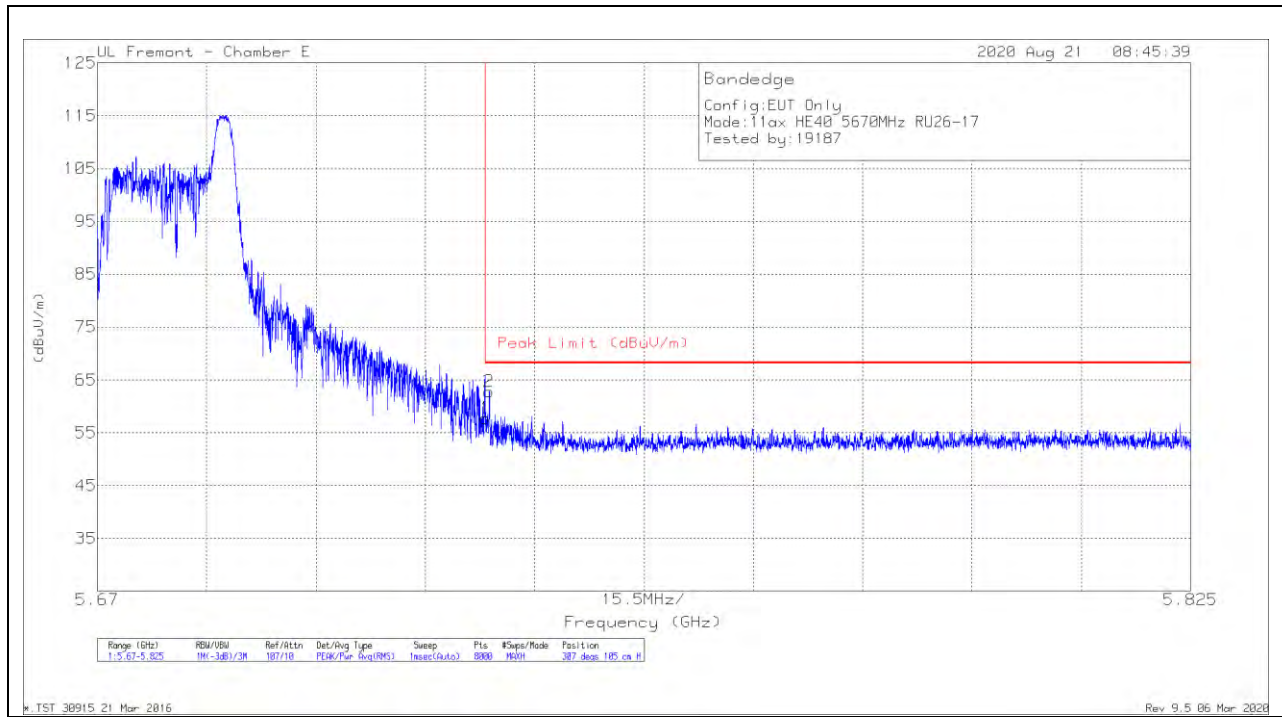

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	44.17	Pk	34.7	-21.2	57.67	68.2	-10.53	307	105	H
2	5.72555	49.27	Pk	34.7	-21.2	62.77	68.2	-5.43	307	105	H

Pk - Peak detector

VERTICAL RESULT

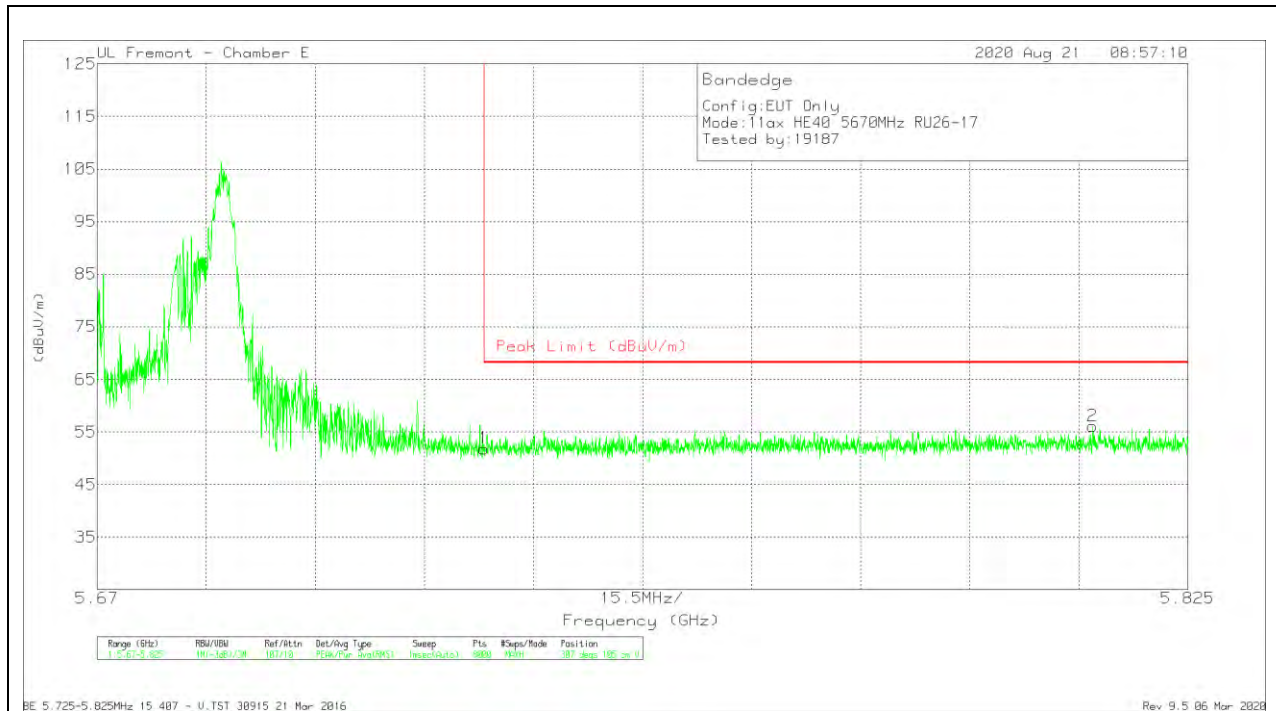


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	38.37	Pk	34.7	-21.2	51.87	68.2	-16.33	307	105	V
2	5.81147	41.84	Pk	35	-20.7	56.14	68.2	-12.06	307	105	V

Pk - Peak detector

2TX ANT 5 + ANT 6 OFDMA MODE – SU, RU Index 65

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

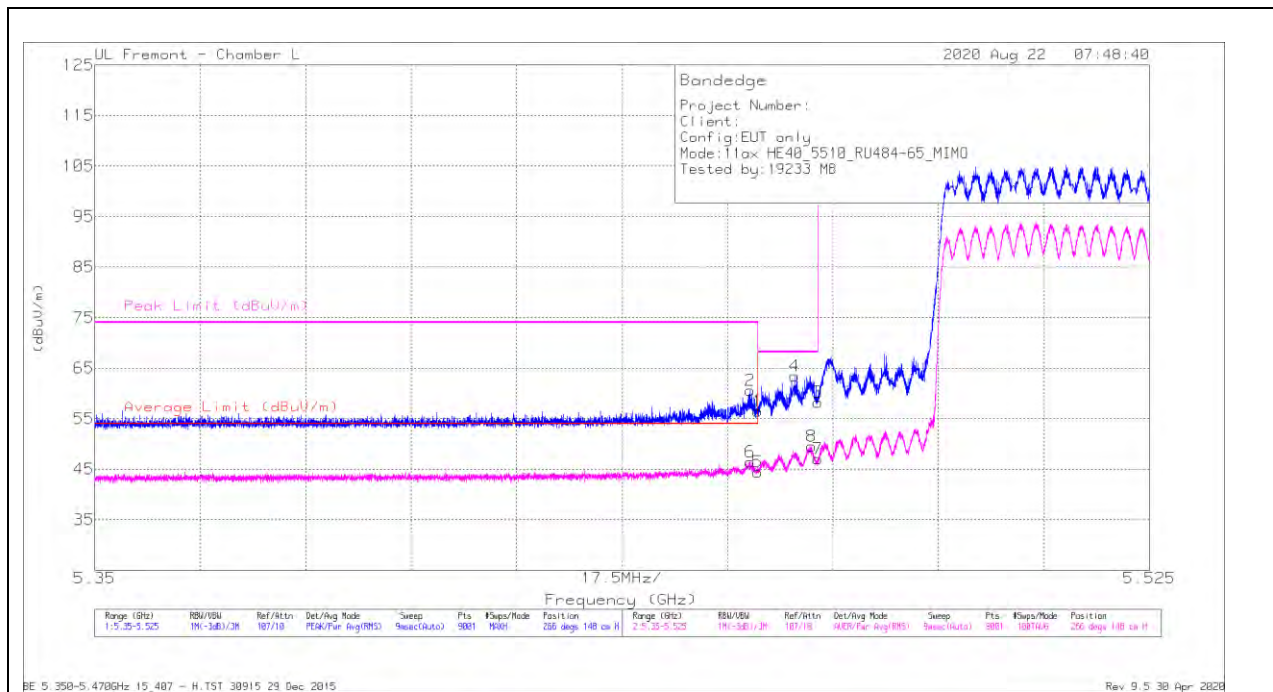

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbll/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	38.84	Pk	34.6	-16.9	56.54	-	-	74	-17.46	266	148	H
2	* 5.45871	42.88	Pk	34.6	-16.9	60.58	-	-	74	-13.42	266	148	H
3	5.46999	40.52	Pk	34.6	-16.9	58.22	-	-	68.2	-9.98	266	148	H
4	5.46616	45.75	Pk	34.6	-16.9	63.45	-	-	68.2	-4.75	266	148	H
5	* 5.45999	26.76	RMS	34.6	-16.9	44.46	54	-9.54	-	-	266	148	H
6	* 5.45877	28.74	RMS	34.6	-16.9	46.44	54	-7.56	-	-	266	148	H
7	5.46999	29.32	RMS	34.6	-16.9	47.02	-	-	-	-	266	148	H
8	5.4689	31.82	RMS	34.6	-16.9	49.52	-	-	-	-	266	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

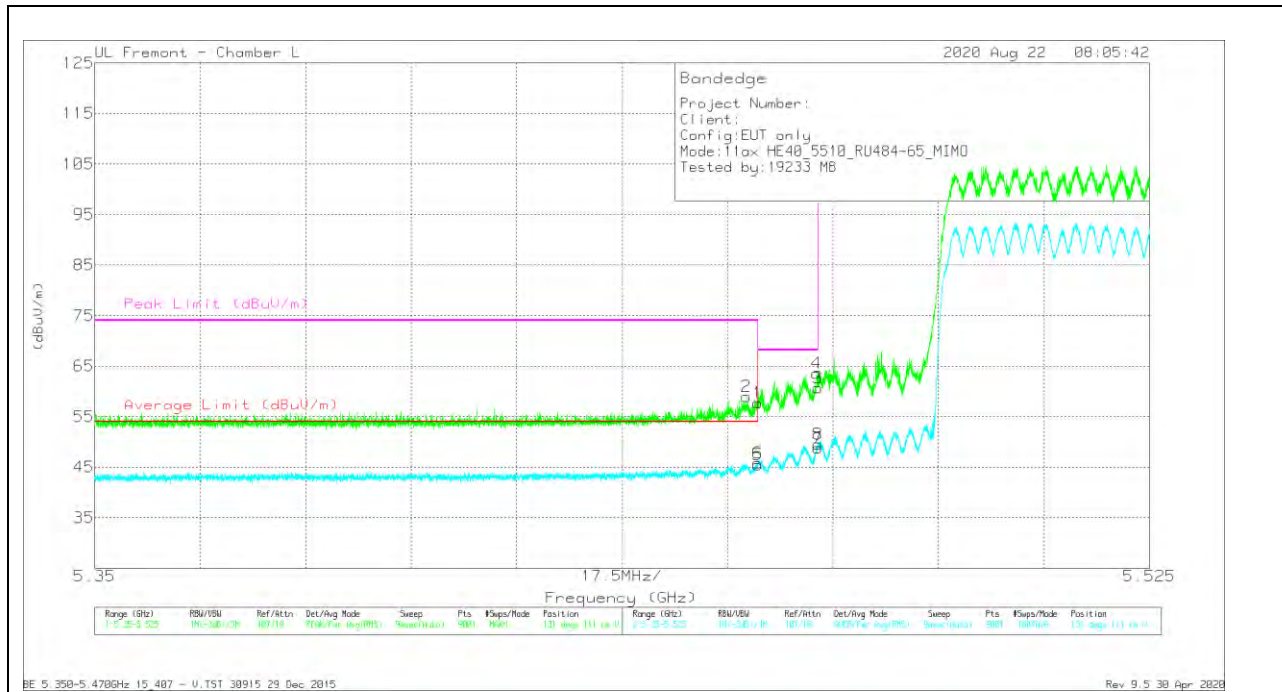


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbll/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	40.02	Pk	34.6	-16.9	57.72	-	-	74	-16.28	131	111	V
2	* 5.45815	41.2	Pk	34.7	-16.9	59	-	-	74	-15	131	111	V
3	5.46999	43.05	Pk	34.6	-16.9	60.75	-	-	68.2	-7.45	131	111	V
4	5.46976	45.83	Pk	34.6	-16.9	63.53	-	-	68.2	-4.67	131	111	V
5	* 5.45999	27.77	RMS	34.6	-16.9	45.47	54	-8.53	-	-	131	111	V
6	* 5.45998	28.15	RMS	34.6	-16.9	45.85	54	-8.15	-	-	131	111	V
7	5.46999	31.1	RMS	34.6	-16.9	48.8	-	-	-	-	131	111	V
8	5.46997	31.86	RMS	34.6	-16.9	49.56	-	-	-	-	131	111	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

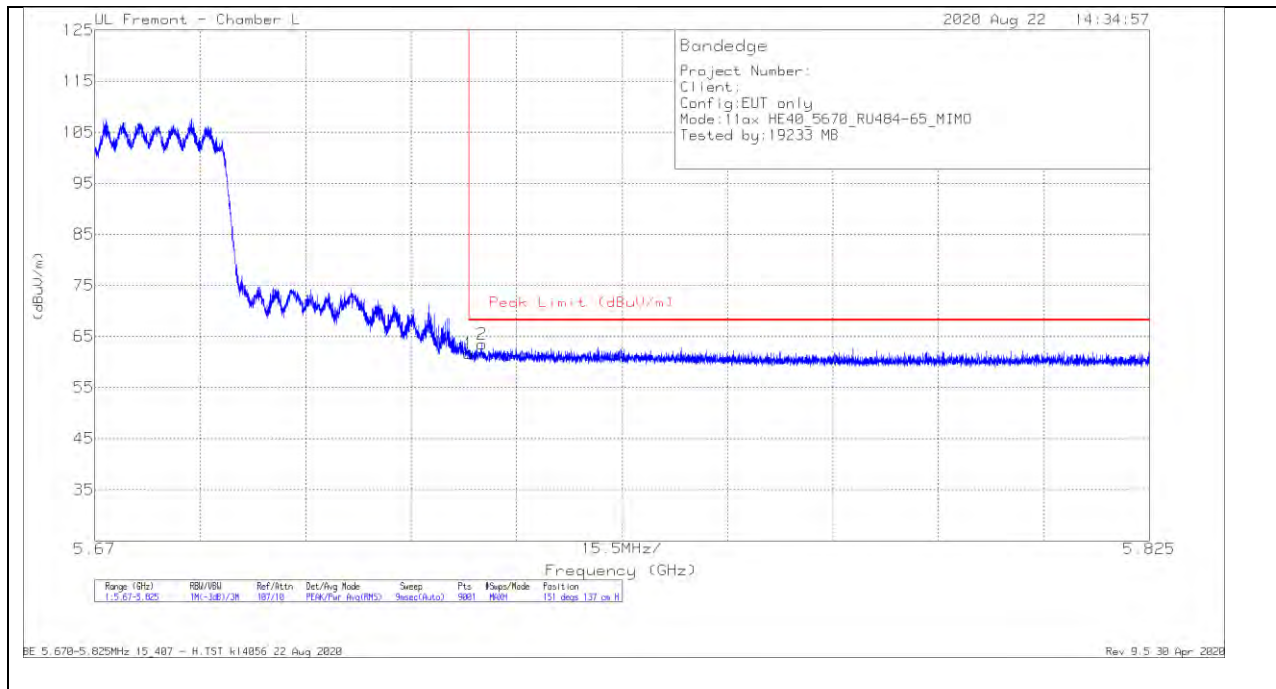

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.72	Pk	34.7	-6.8	61.62	68.2	-6.58	151	137	H
2	5.72694	35.62	Pk	34.7	-6.8	63.52	68.2	-4.68	151	137	H

Pk - Peak detector

VERTICAL RESULT

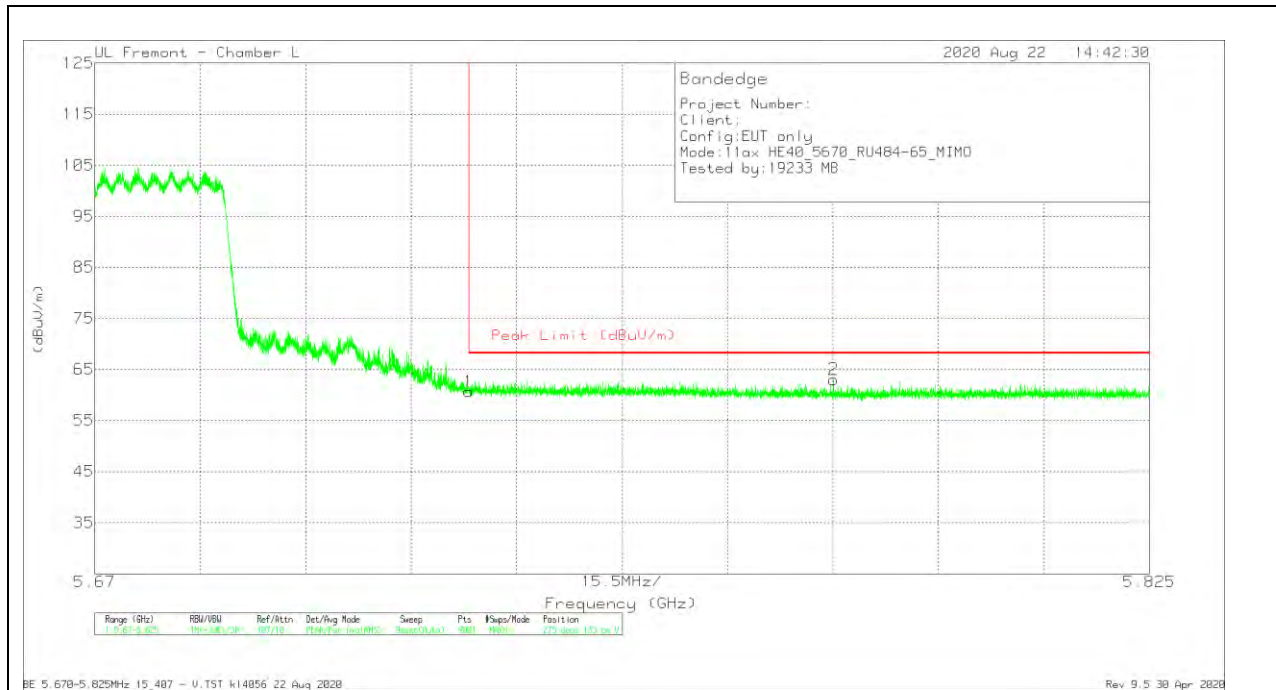


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	32.77	Pk	34.7	-6.8	60.67	68.2	-7.53	275	133	V
2	5.77853	35.07	Pk	34.8	-6.8	63.07	68.2	-5.13	275	133	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

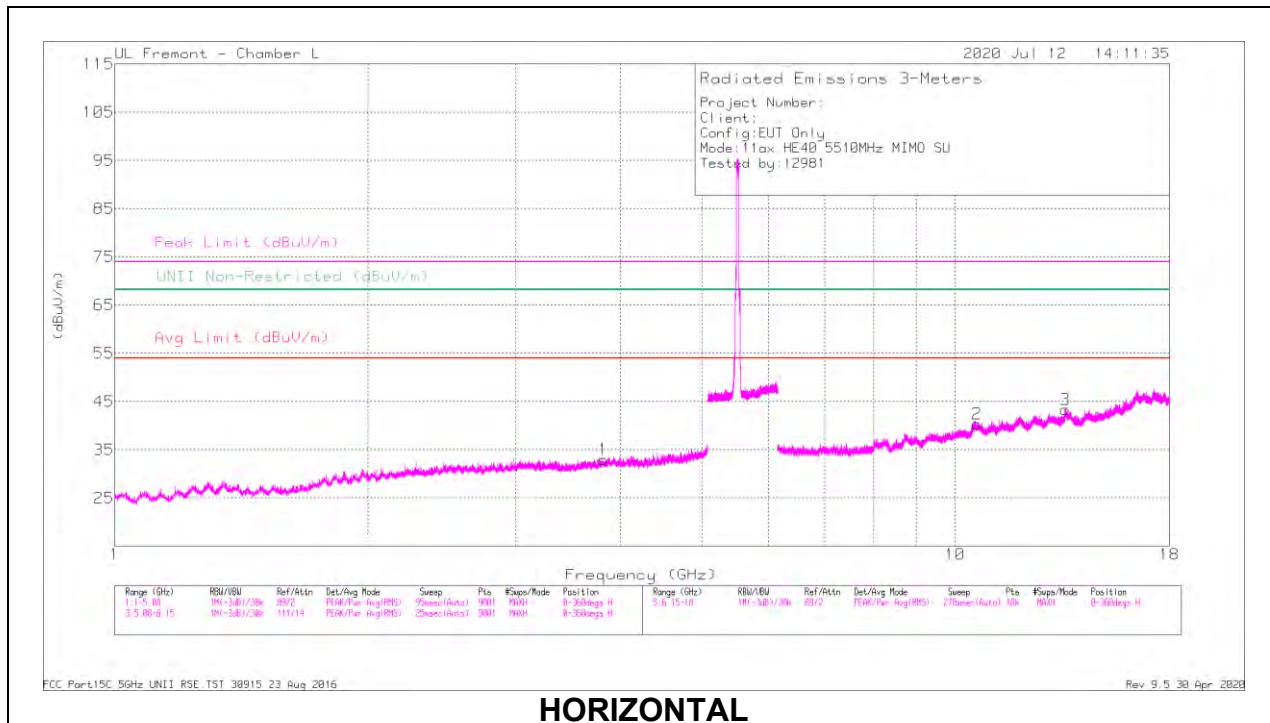

HORIZONTAL

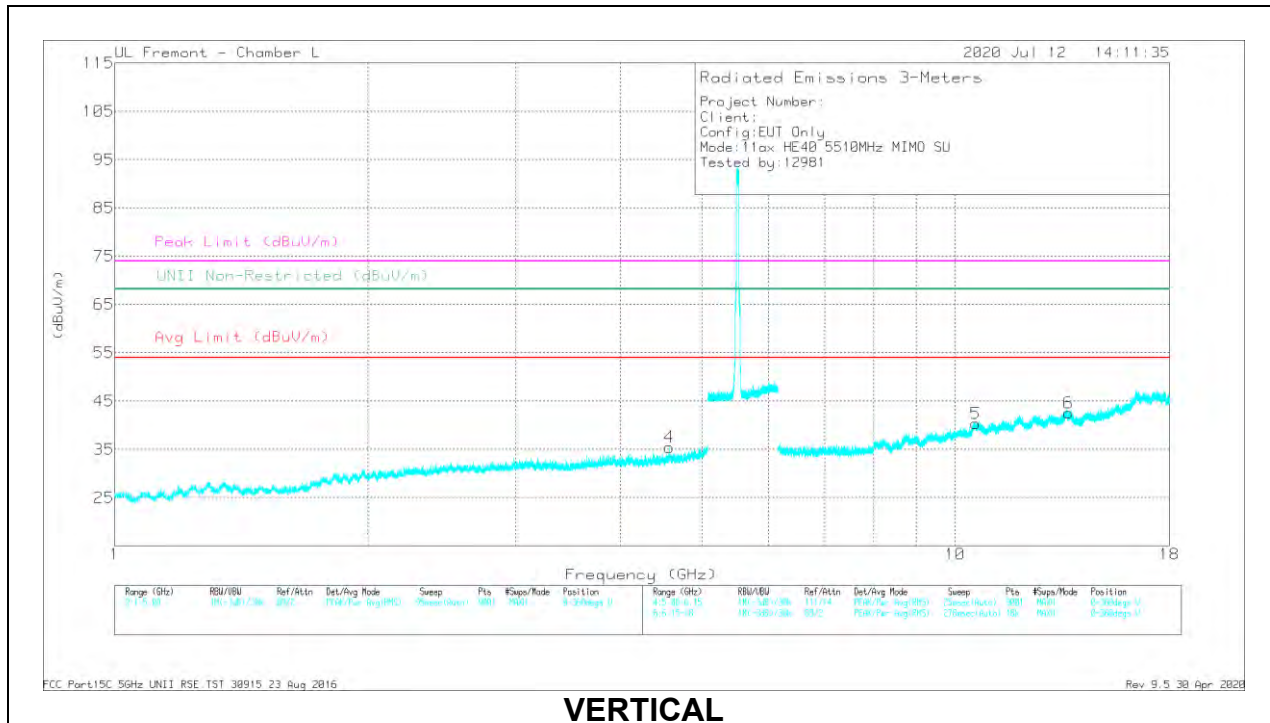


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meas Reading (dBµV)	Dist	AF 544 (dBm)	AmpCorFiltPsd (dB)	Corrected Reading (dBµV/m)	Ang Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNI Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.81992	36.86	PK-U	33.5	-28.9	41.46	-	-	74	-32.54	-	-	118	163	H
	3.81732	26.14	ADR	33.5	-28.9	30.86	54	-23.14	-	-	-	-	118	163	H
4	* 4.56545	35.77	PK-U	34.2	-27.3	42.97	-	-	74	-31.33	-	-	242	220	V
	4.57009	25.26	ADR	34.2	-27.3	32.28	54	-21.72	-	-	-	-	242	220	V
2	* 10.623	31.46	PK-U	37.8	-20.1	49.16	-	-	74	-24.84	-	-	169	256	H
	10.6291	20.58	ADR	37.8	-20.1	38.4	54	-15.6	-	-	-	-	169	256	H
3	13.53666	32.16	PK-U	38.9	-19.3	51.76	-	-	-	-	68.2	-16.44	274	198	H
	13.53743	21.1	ADR	38.9	-19.3	40.82	-	-	-	-	-	-	274	198	H
5	10.58487	30.73	PK-U	37.9	-19.8	48.83	-	-	-	-	68.2	-19.37	166	145	V
	10.58486	20.86	ADR	37.9	-19.8	39.08	-	-	-	-	-	-	166	145	V
6	13.60177	30.22	PK-U	38.7	-18.9	50.12	-	-	-	-	68.2	-18.08	35	234	V
	13.65937	20.41	ADR	38.8	-18.9	40.43	-	-	-	-	-	-	35	234	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

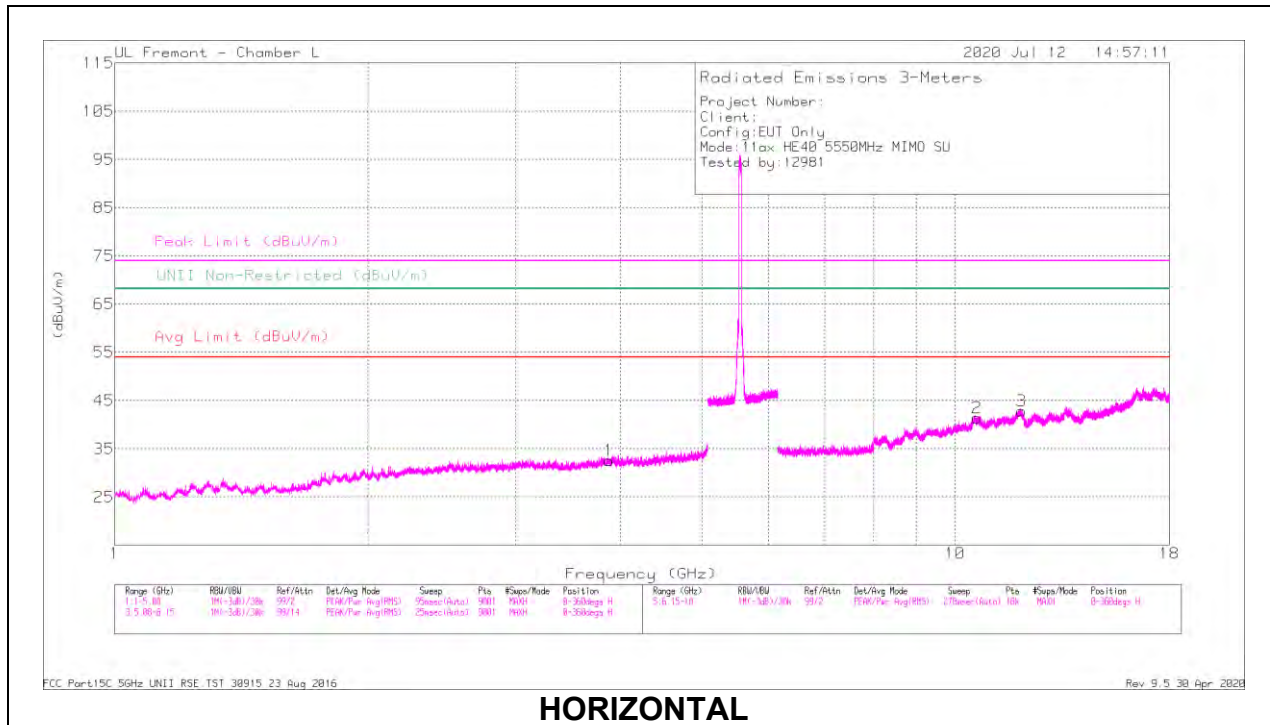

HORIZONTAL

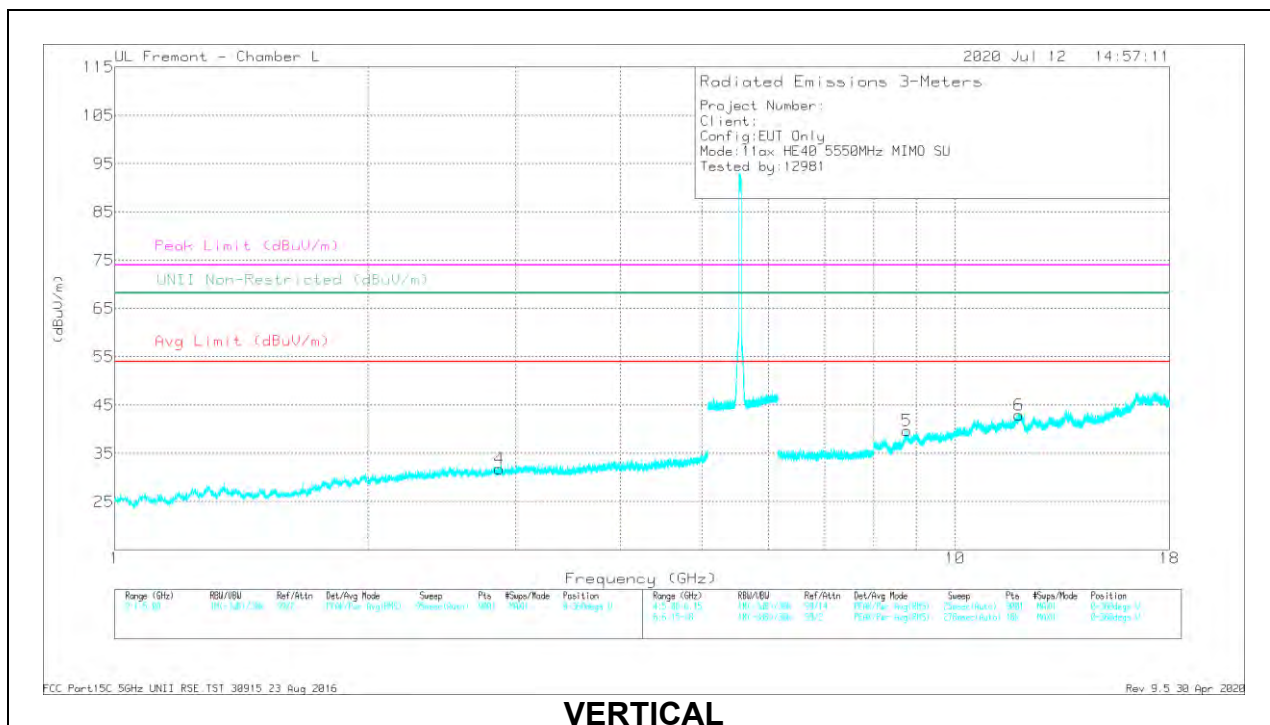


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	AmpCoeff/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.87582	36.39	PK-U	33.6	-28.2	41.79	-	-	74	-32.21	-	-	116	158	H
	* 3.87629	26.05	ADR	33.6	-28.1	31.67	54	-22.33	-	-	-	-	116	158	H
4	* 2.86597	36.52	PK-U	32.3	-29.6	35.52	-	-	74	-34.48	-	-	159	196	V
	* 2.87042	26.63	ADR	32.3	-29.6	29.45	54	-24.55	-	-	-	-	159	196	V
2	* 10.61911	30.58	PK-U	37.9	-20.1	48.38	-	-	74	-25.62	-	-	238	241	H
	* 10.62006	19.76	ADR	37.9	-20.1	37.88	54	-16.32	-	-	-	-	238	241	H
3	* 12.00674	30.36	PK-U	38.7	-19.7	49.36	-	-	74	-24.64	-	-	181	210	H
	* 12.00675	20.18	ADR	38.7	-19.7	39.3	54	-14.7	-	-	-	-	181	210	H
5	8.76349	30.91	PK-U	36.1	-20.5	46.51	-	-	-	-	68.2	-21.69	240	239	V
	8.76297	20.69	ADR	36.1	-20.5	36.41	-	-	-	-	-	-	240	239	V
	* 11.92197	30.96	PK-U	38.6	-19.7	49.86	-	-	74	-24.14	-	-	161	308	V
	* 11.92129	20.67	ADR	38.6	-19.7	39.69	54	-14.31	-	-	-	-	161	308	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

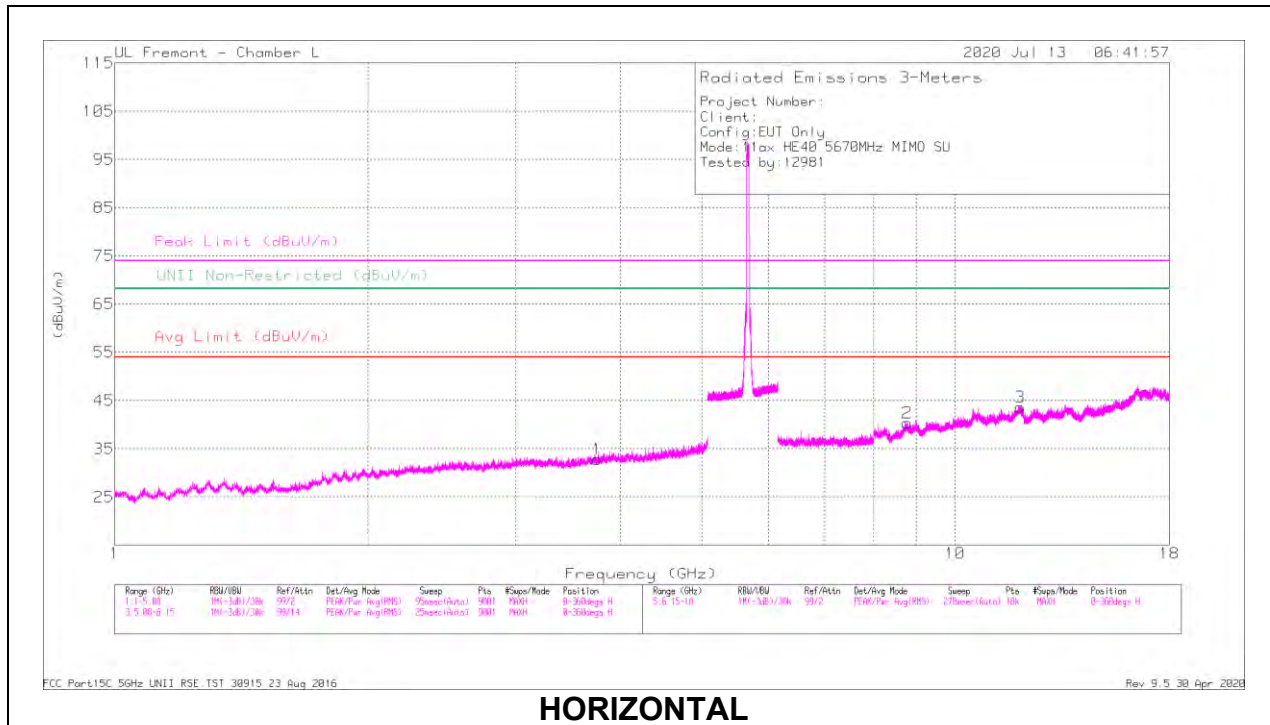

HORIZONTAL

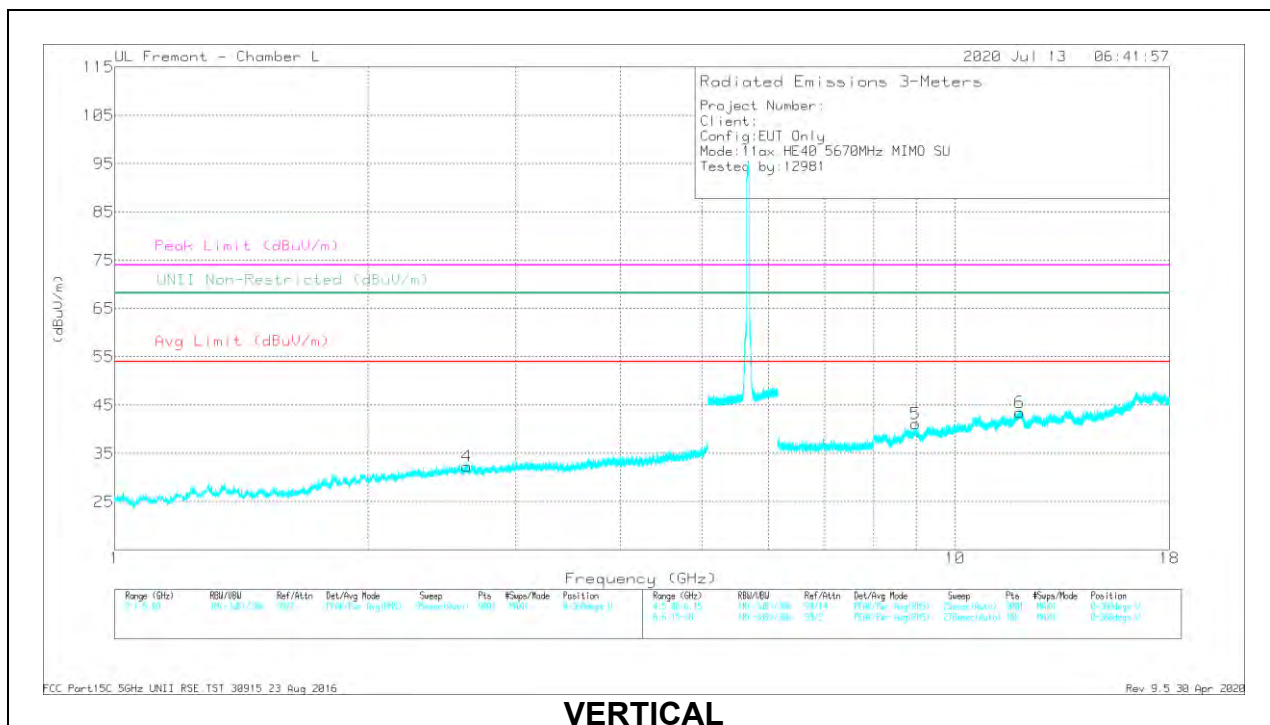


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBµV)	Det	AF 344 (dBm)	AmpCoeff/Pad (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNI Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.75508	37.94	PK-U	33.3	-29	42.24	-	-	74	-31.76	-	-	38	200	H
	* 3.75432	26.85	ADR	33.3	-29	31.27	54	-22.73	-	-	-	-	38	200	H
4	2.6247	39.78	PK-U	32.3	-30.3	41.75	-	-	-	-	68.2	-26.42	262	110	V
	2.62278	28.47	ADR	32.3	-30.3	39.59	-	-	-	-	-	-	262	110	V
2	8.77193	33.19	PK-U	36	-20.5	48.69	-	-	-	-	68.2	-19.51	202	110	H
	8.77253	21.1	ADR	36	-20.5	36.72	-	-	-	-	-	-	202	110	H
3	* 11.95147	30.78	PK-U	35.5	-19.4	49.88	-	-	74	-24.02	-	-	257	105	H
	* 11.95147	20.37	ADR	38.6	-19.4	39.69	54	-14.31	-	-	-	-	257	105	H
5	8.98198	31.39	PK-U	36.1	-20.2	47.29	-	-	-	-	68.2	-20.91	218	386	V
	8.98233	20.98	ADR	36.1	-20.2	37	-	-	-	-	-	-	218	386	V
6	* 11.93975	31.09	PK-U	38.7	-19.5	50.23	-	-	74	-23.71	-	-	341	391	V
	* 11.93997	20.7	ADR	38.7	-19.5	40.02	54	-13.98	-	-	-	-	341	391	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

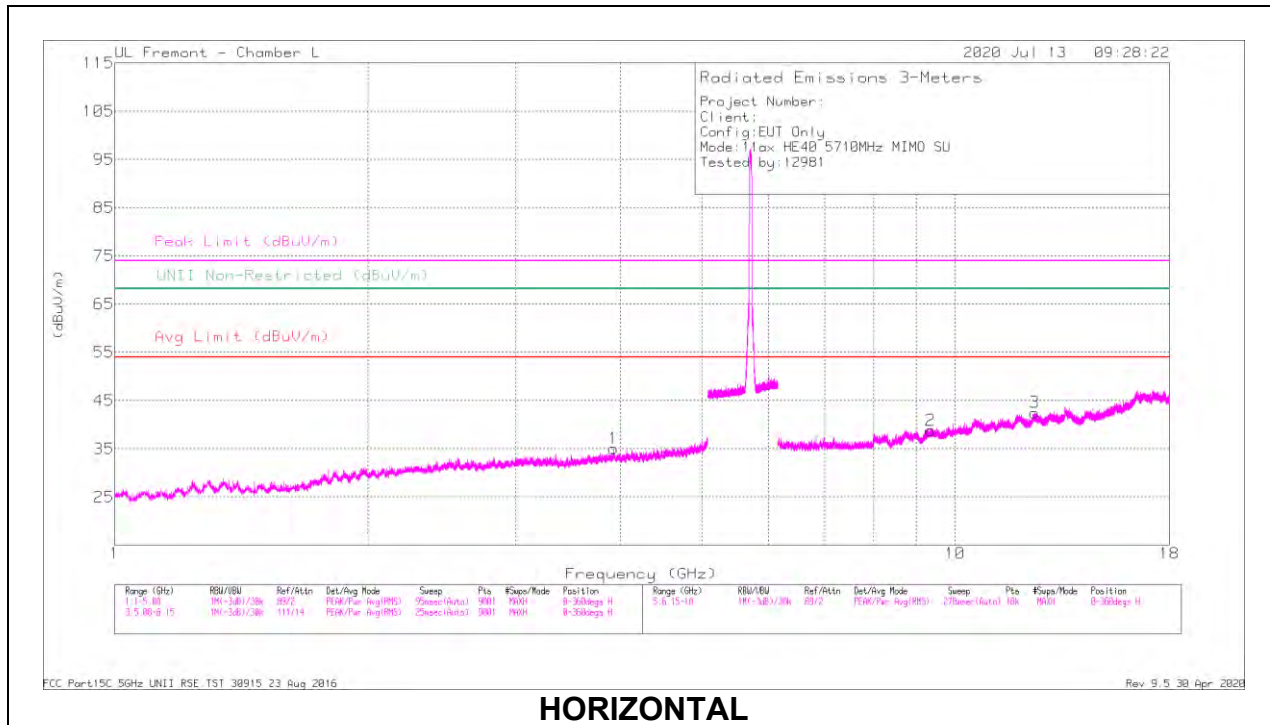

HORIZONTAL

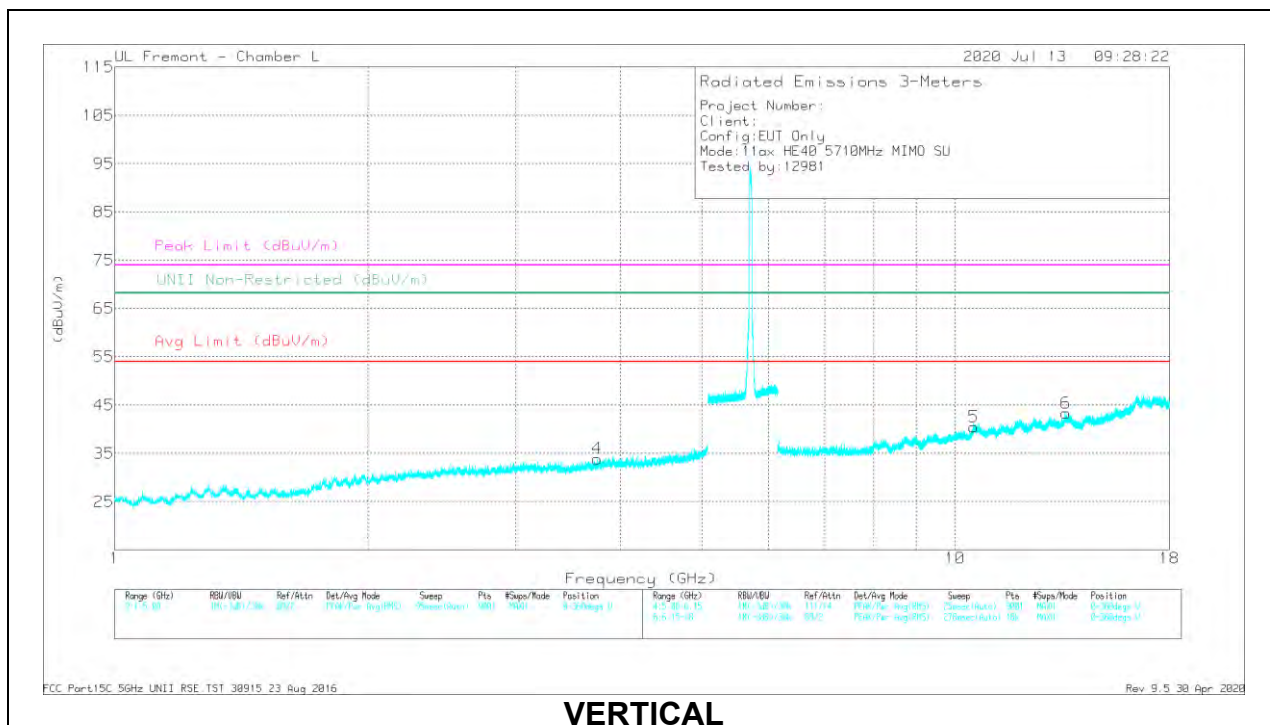

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBµV)	Det	AF 344 (dBm)	Amp/Coeff/Pad (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNI Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.92158	37.24	PK-U	33.5	-27.5	43.24	-	-	74	-30.76	-	-	89	122	H
	3.92496	25.92	ADR	33.4	-27.6	31.64	54	-22.16	-	-	-	-	89	122	H
4	* 3.755	36.74	PK-U	33.3	-29	41.04	-	-	74	-32.96	-	-	193	177	V
	* 3.75471	27.15	ADR	33.3	-29	31.57	54	-22.43	-	-	-	-	193	177	V
2	* 9.35692	32.07	PK-U	36.5	-21.3	47.27	-	-	74	-26.73	-	-	289	232	H
	* 9.35837	20.33	ADR	36.5	-21.3	36.66	54	-18.35	-	-	-	-	289	232	H
3	* 12.43346	30.2	PK-U	39.1	-19.7	49.6	-	-	74	-24.4	-	-	204	187	H
	* 12.4361	19.87	ADR	39	-19.7	39.29	54	-14.71	-	-	-	-	204	187	H
5	10.5391	29.64	PK-U	37.8	-19.5	47.94	-	-	-	-	68.2	-20.26	261	147	V
	10.53893	19.11	ADR	37.8	-19.5	37.53	-	-	-	-	-	-	261	147	V
6	13.5554	31.81	PK-U	38.9	-19.3	51.41	-	-	-	-	68.2	-16.79	225	198	V
	13.55467	20.92	ADR	38.9	-19.3	40.64	-	-	-	-	-	-	225	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

2TX ANT 5 + ANT 6 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

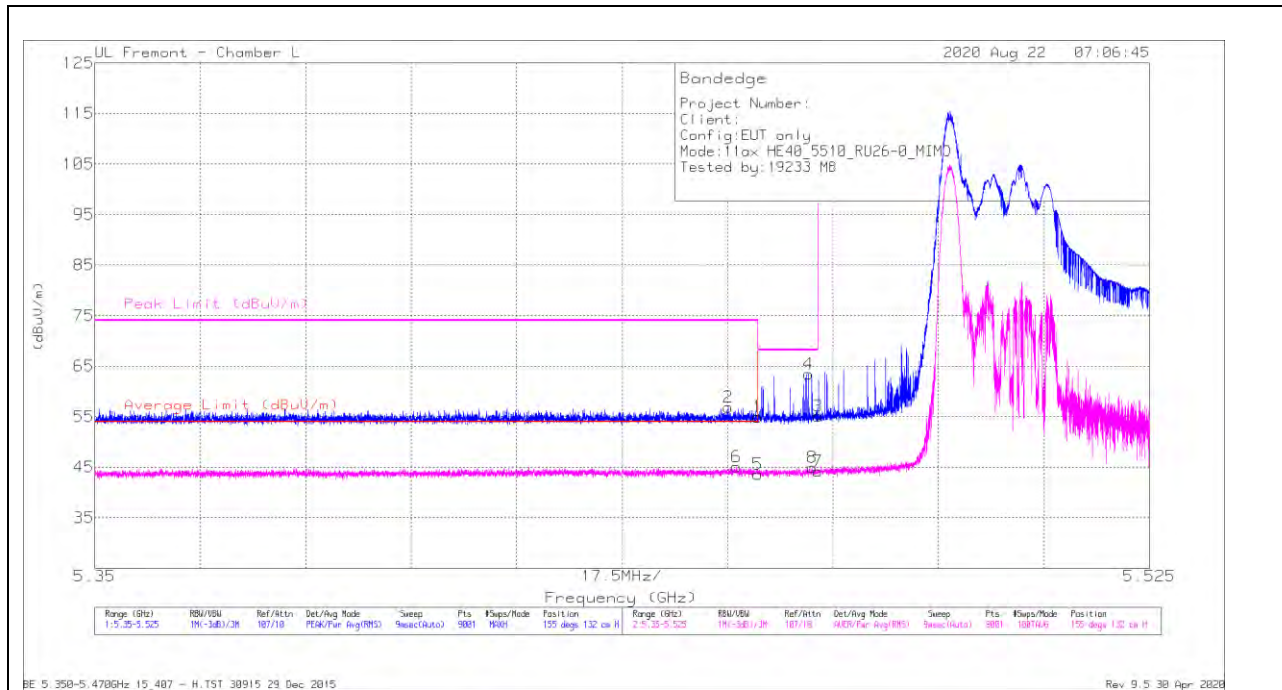

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbll/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	37.25	Pk	34.6	-16.9	54.95	-	-	74	-19.05	155	132	H
2	* 5.45508	39.14	Pk	34.6	-16.9	56.84	-	-	74	-17.16	155	132	H
3	5.46999	37.39	Pk	34.6	-16.9	55.09	-	-	68.2	-13.11	155	132	H
4	5.46843	45.72	Pk	34.6	-16.9	63.42	-	-	68.2	-4.78	155	132	H
5	* 5.45999	25.9	RMS	34.6	-16.9	43.6	54	-10.4	-	-	155	132	H
6	* 5.45648	27.27	RMS	34.7	-16.9	45.07	54	-8.93	-	-	155	132	H
7	5.46999	26.46	RMS	34.6	-16.9	44.16	-	-	-	-	155	132	H
8	5.46906	27.28	RMS	34.6	-16.9	44.98	-	-	-	-	155	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

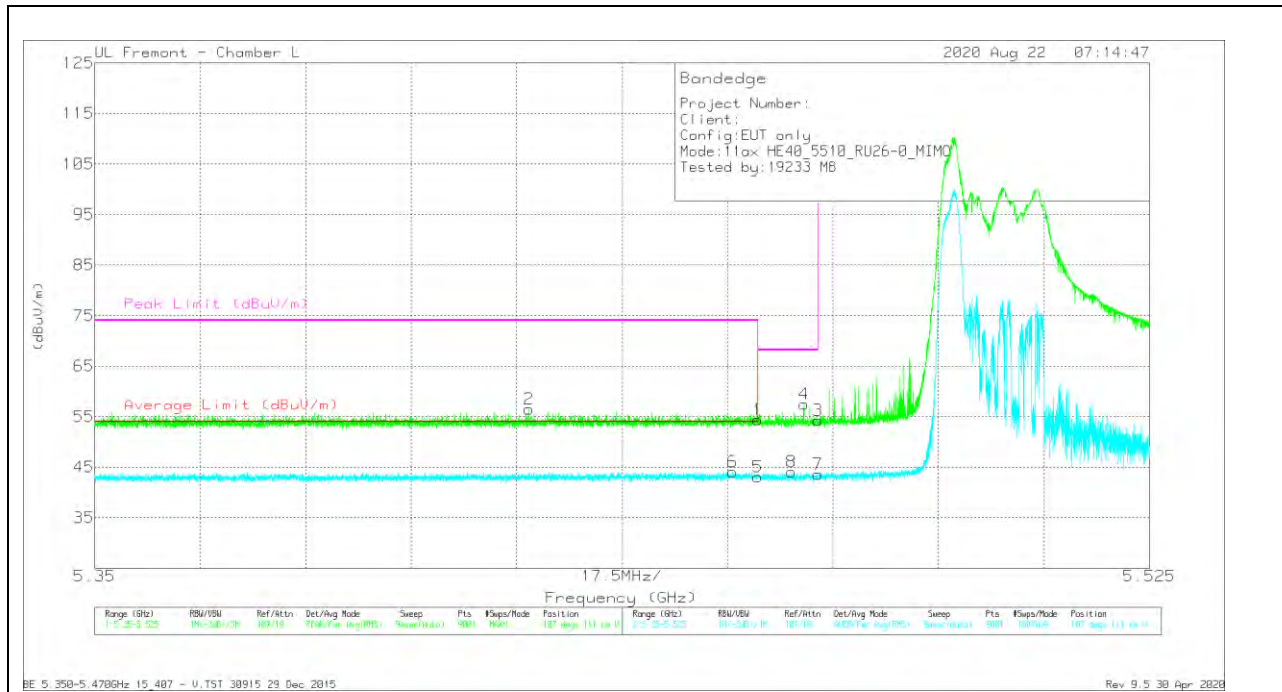


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	36.64	Pk	34.6	-16.9	54.34	-	-	74	-19.66	107	111	V
2	* 5.4221	38.86	Pk	34.5	-16.9	56.46	-	-	74	-17.54	107	111	V
3	5.46999	36.6	Pk	34.6	-16.9	54.3	-	-	68.2	-13.9	107	111	V
4	5.46766	39.8	Pk	34.6	-16.9	57.5	-	-	68.2	-10.7	107	111	V
5	* 5.45999	25.35	RMS	34.6	-16.9	43.05	54	-10.95	-	-	107	111	V
6	* 5.45589	26.4	RMS	34.6	-16.9	44.1	54	-9.9	-	-	107	111	V
7	5.46999	25.94	RMS	34.6	-16.9	43.64	-	-	-	-	107	111	V
8	5.46563	26.35	RMS	34.6	-16.9	44.05	-	-	-	-	107	111	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX ANT 5 + ANT 6 OFDMA MODE – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

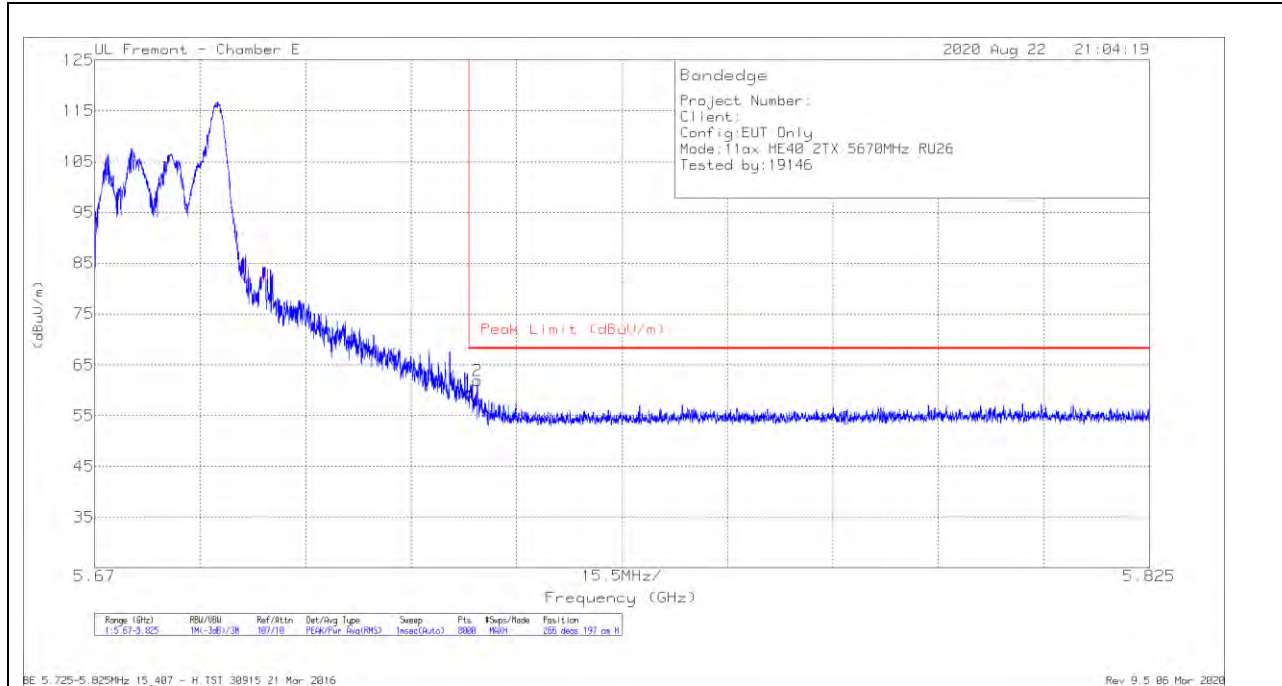

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.12	Pk	34.7	-21.2	59.62	68.2	-8.58	266	197	H
2	5.72625	48.41	Pk	34.7	-21.2	61.91	68.2	-6.29	266	197	H

Pk - Peak detector

VERTICAL RESULT

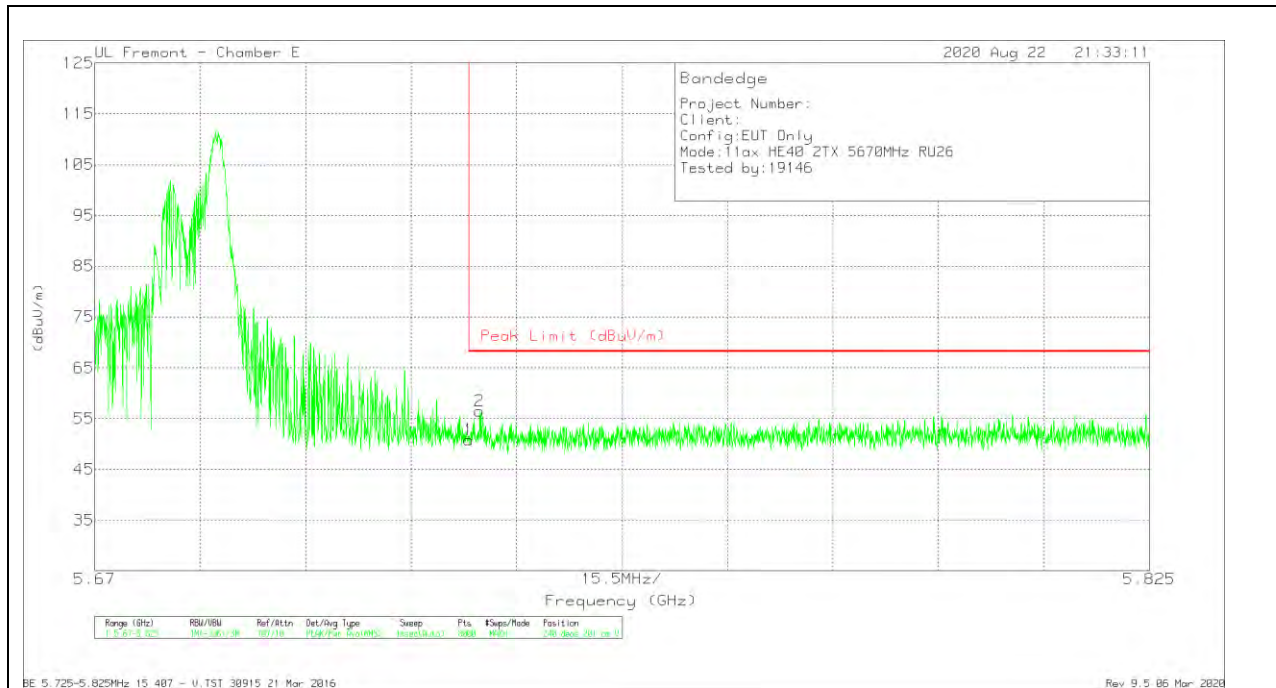


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	37.3	Pk	34.7	-21.2	50.8	68.2	-17.4	240	201	V
2	5.72656	42.94	Pk	34.7	-21.2	56.44	68.2	-11.76	240	201	V

Pk - Peak detector


2TX ANT 5 + ANT 6 OFDMA MODE – 26 Tones, RU Index 17

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

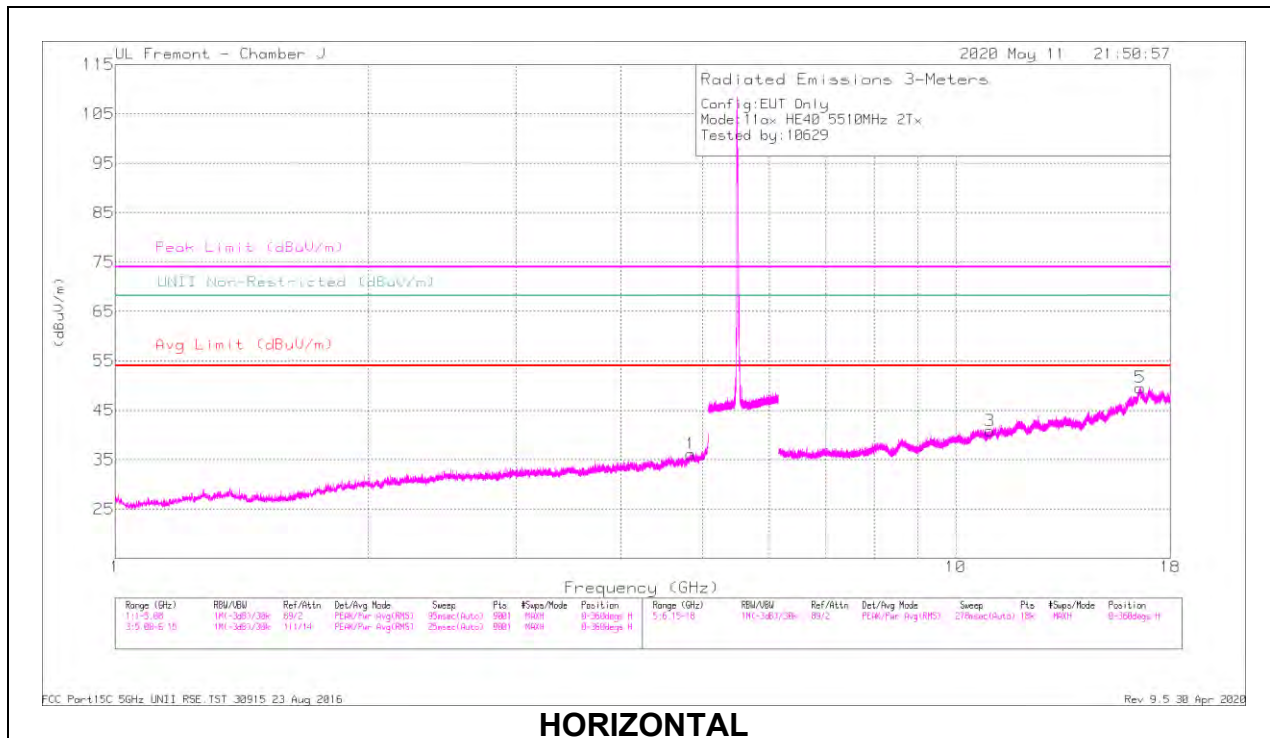

HORIZONTAL

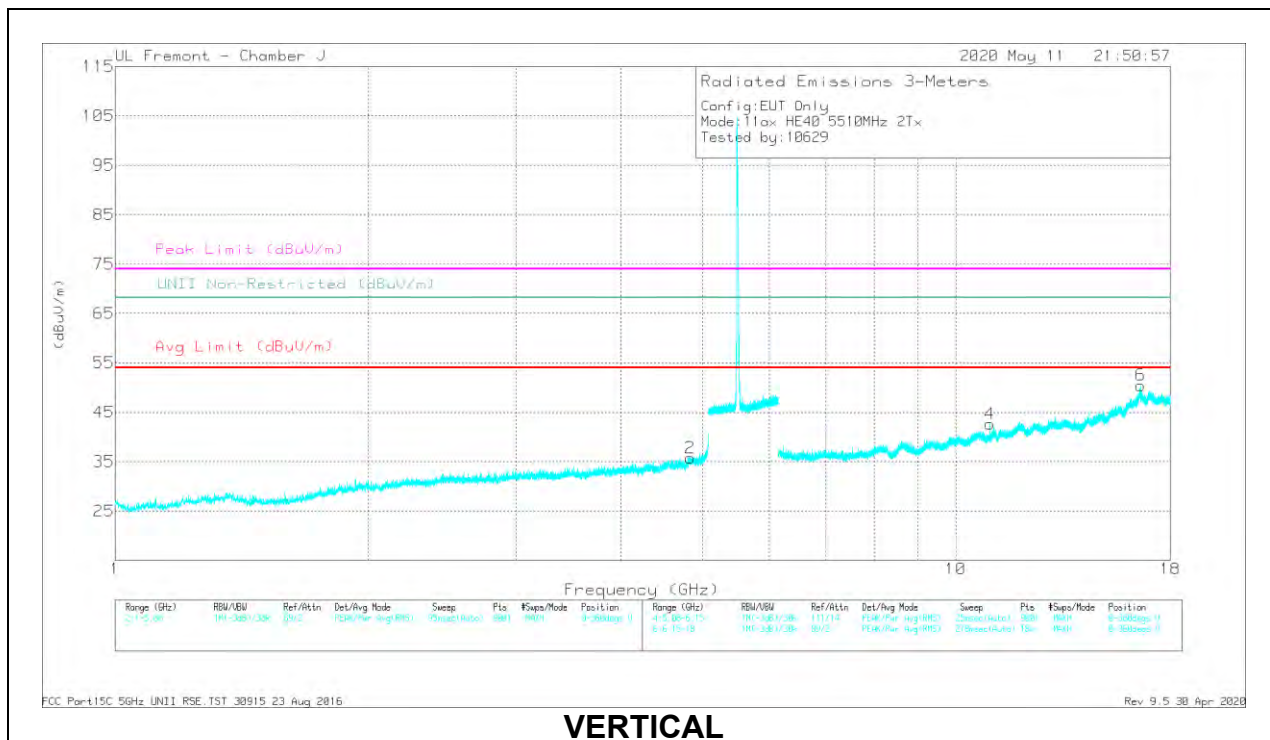


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Ftr/Psd (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.84047	39.75	PK-U	34.3	-30.5	43.55	-	-	74	-30.45	-	-	274	321	H
	* 4.8411	30.31	ADR	34.3	-30.5	34.11	54	-19.89	-	-	-	-	274	321	H
2	* 4.8346	40.65	PK-U	34.3	-30.6	44.38	-	-	74	-29.62	-	-	163	384	V
	* 4.83512	29.66	ADR	34.2	-30.6	33.26	54	-20.74	-	-	-	-	163	384	V
3	* 10.98356	38.43	PK-U	38	-24.1	50.33	-	-	74	-23.67	-	-	44	101	H
	* 10.98374	25.37	ADR	38	-24.1	39.27	54	-14.73	-	-	-	-	44	101	H
5	16.58469	33.47	PK-U	42	-18.9	56.57	-	-	-	-	68.2	-11.63	79	148	H
	* 10.98483	37.58	PK-U	37.9	-24.1	51.38	-	-	74	-22.62	-	-	42	109	V
4	* 10.98425	26.86	ADR	38	-24.1	40.76	54	-13.24	-	-	-	-	42	109	V
6	16.59969	33.82	PK-U	42.2	-19	57.02	-	-	-	-	68.2	-11.18	327	226	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

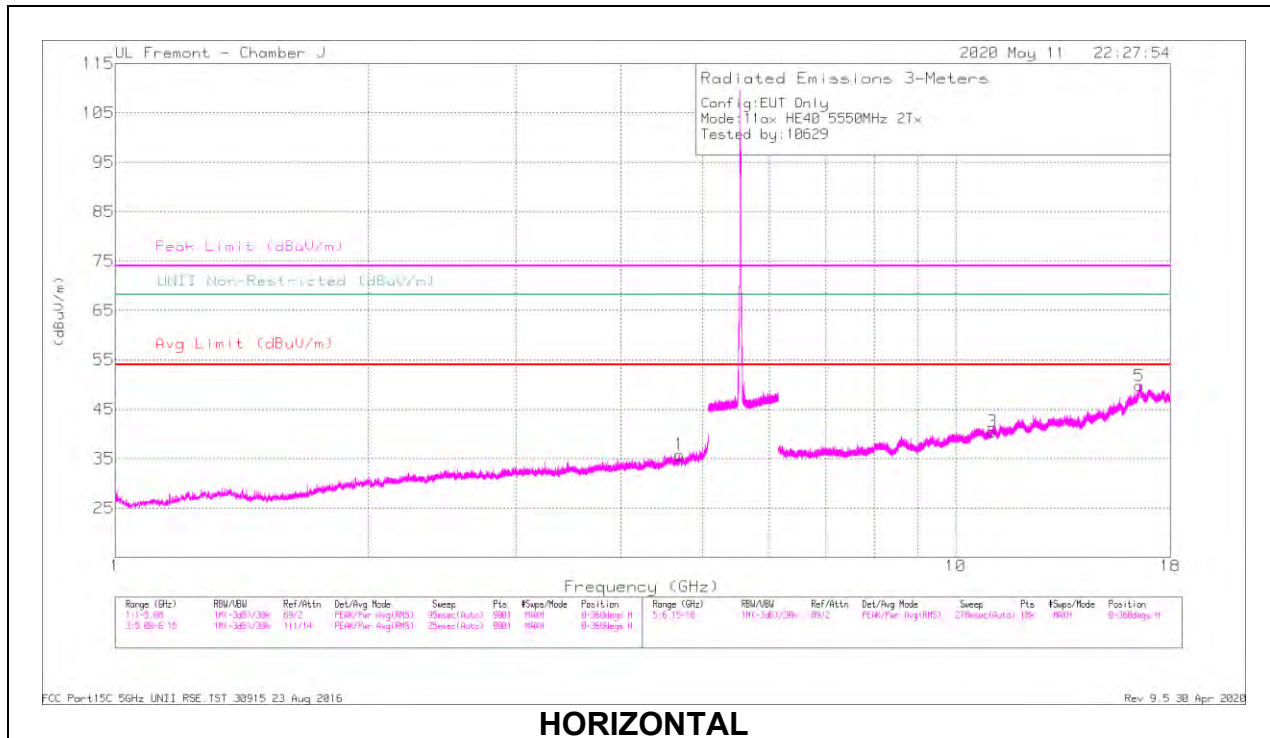

HORIZONTAL

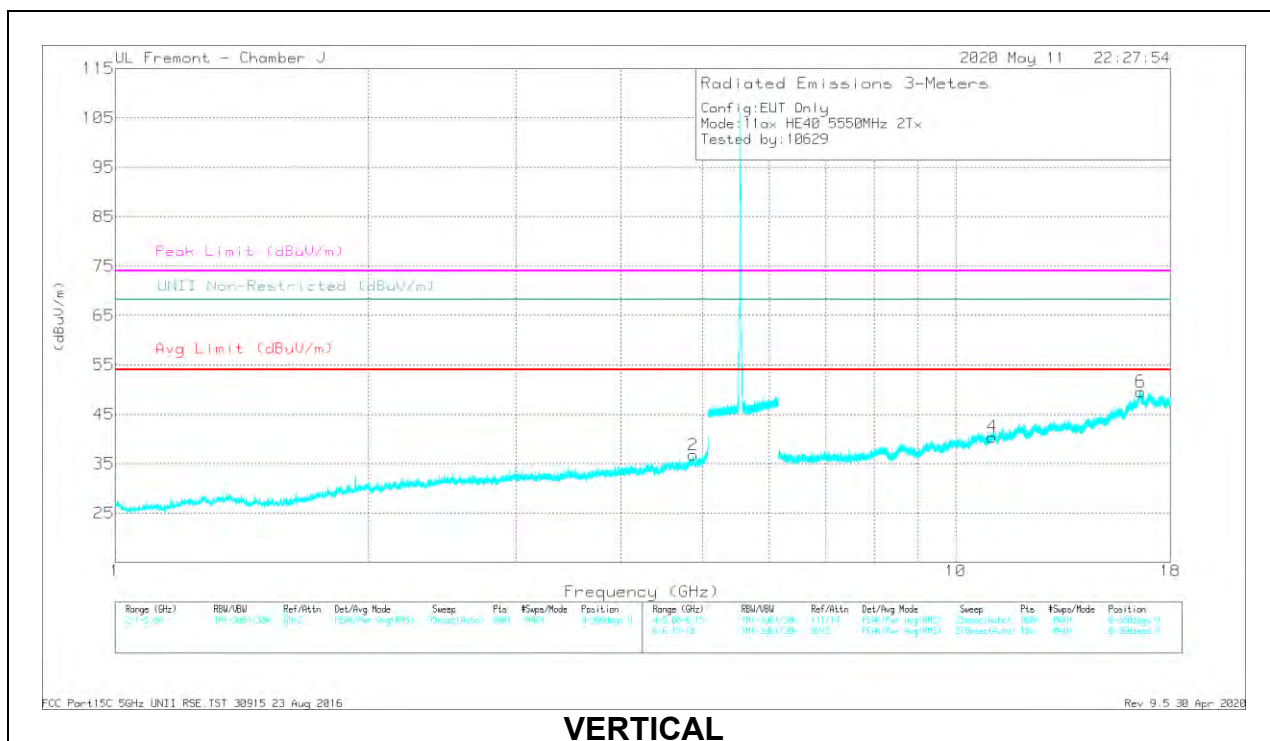


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.69576	39.74	PK-U	34.2	-30.6	43.34	-	-	74	-30.66	-	-	176	319	H
	* 4.69576	28.94	ADR	34.2	-30.6	32.54	54	-21.46	-	-	-	-	176	319	H
2	* 4.87179	39.38	PK-U	34.1	-29.8	43.68	-	-	74	-30.32	-	-	38	341	V
	* 4.87284	30.06	ADR	34.1	-29.7	34.46	54	-19.54	-	-	-	-	38	341	V
3	* 11.06102	34.28	PK-U	37.9	-23.7	48.46	-	-	74	-25.54	-	-	228	262	H
	* 11.06202	24.33	ADR	37.9	-23.7	38.53	54	-15.47	-	-	-	-	226	262	H
5	16.53433	33.09	PK-U	42	-19	56.09	-	-	-	-	68.2	-12.11	52	101	H
4	* 11.06255	35.3	PK-U	37.9	-23.7	49.5	-	-	74	-24.5	-	-	331	123	V
	* 11.06255	24.31	ADR	37.9	-23.7	38.51	54	-15.49	-	-	-	-	331	123	V
	16.59172	33.69	PK-U	42.1	-19	56.79	-	-	-	-	68.2	-11.41	117	173	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

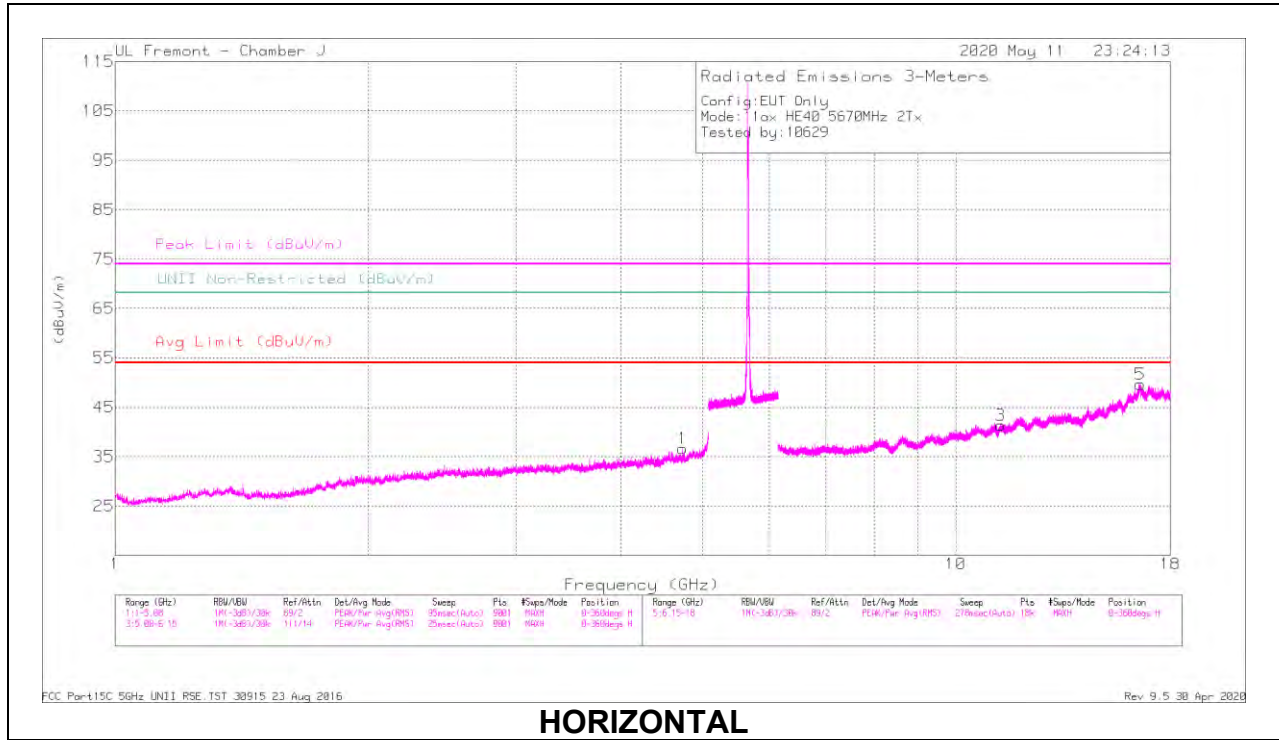

HORIZONTAL

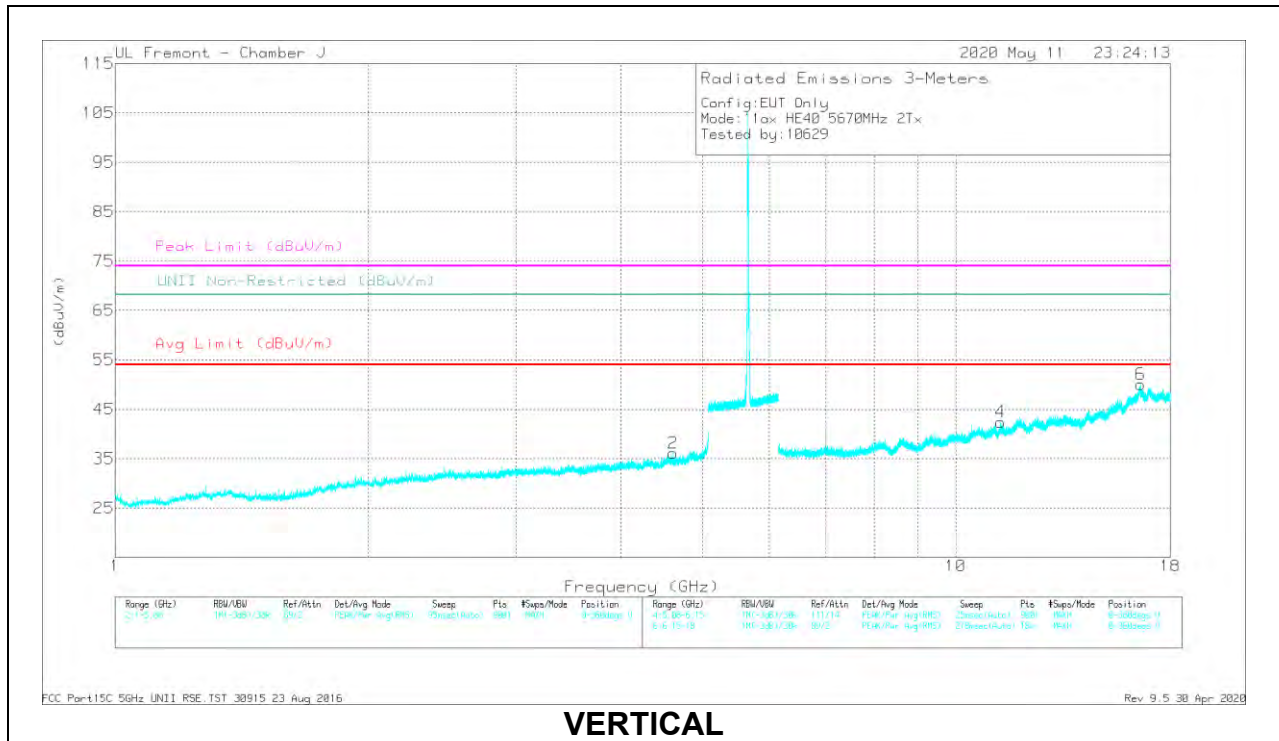


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Ftr/Psd (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.72952	40.09	PK-U	34	-30.6	43.49	-	-	74	-30.51	-	-	223	167	H
	* 4.73315	29.33	ADR	34	-30.5	32.83	54	-21.17	-	-	-	-	223	167	H
2	* 4.61131	39.55	PK-U	34.1	-30.5	43.15	-	-	74	-30.85	-	-	46	178	V
	* 4.61194	29.02	ADR	34.1	-30.5	32.62	54	-21.38	-	-	-	-	46	178	V
3	* 11.3035	34.56	PK-U	38	-23.2	49.36	-	-	74	-24.64	-	-	247	113	H
	* 11.30411	24.3	ADR	38	-23.2	39.1	54	-14.9	-	-	-	-	247	113	H
5	16.5833	33.92	PK-U	42	-18.9	57.02	-	-	-	-	68.2	-11.18	305	291	H
4	* 11.30332	35.03	PK-U	38	-23.2	49.83	-	-	74	-24.17	-	-	62	132	V
	* 11.30461	24.64	ADR	38	-23.2	39.44	54	-14.56	-	-	-	-	62	132	V
6	16.59769	31.52	PK-U	42.1	-19	54.62	-	-	-	-	68.2	-13.58	285	232	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

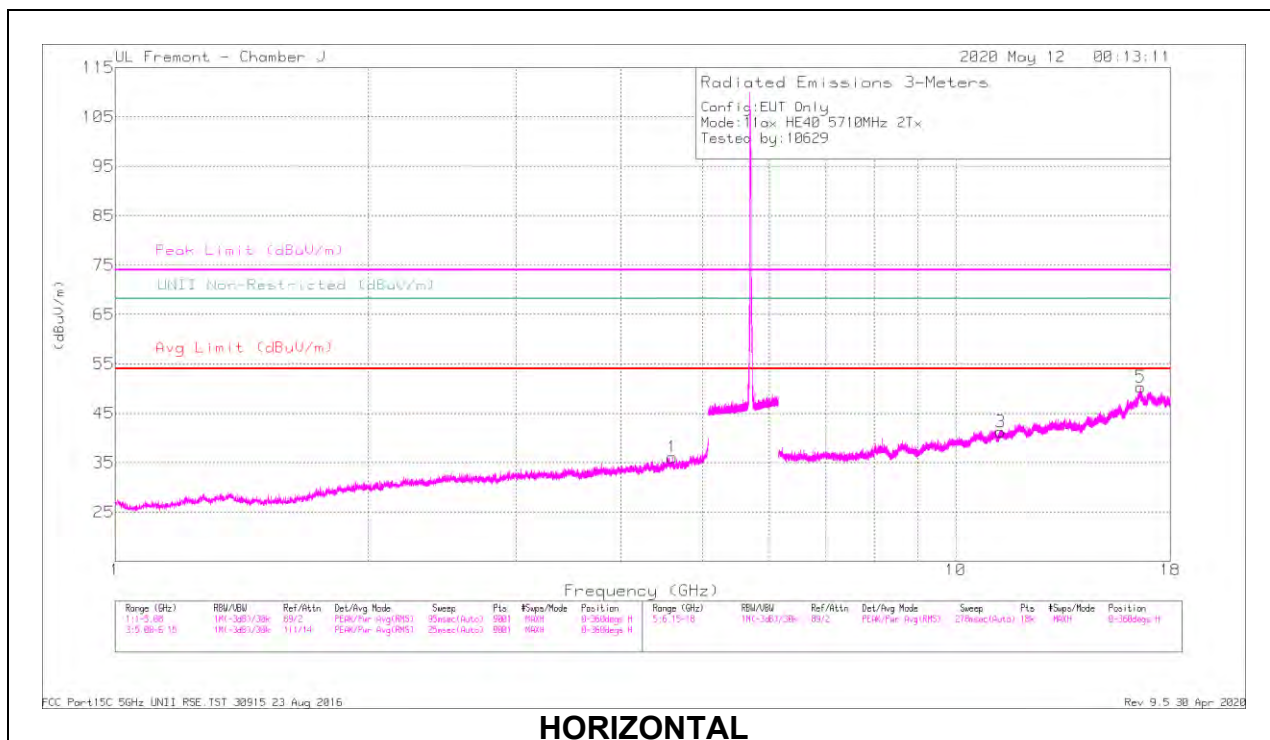

HORIZONTAL

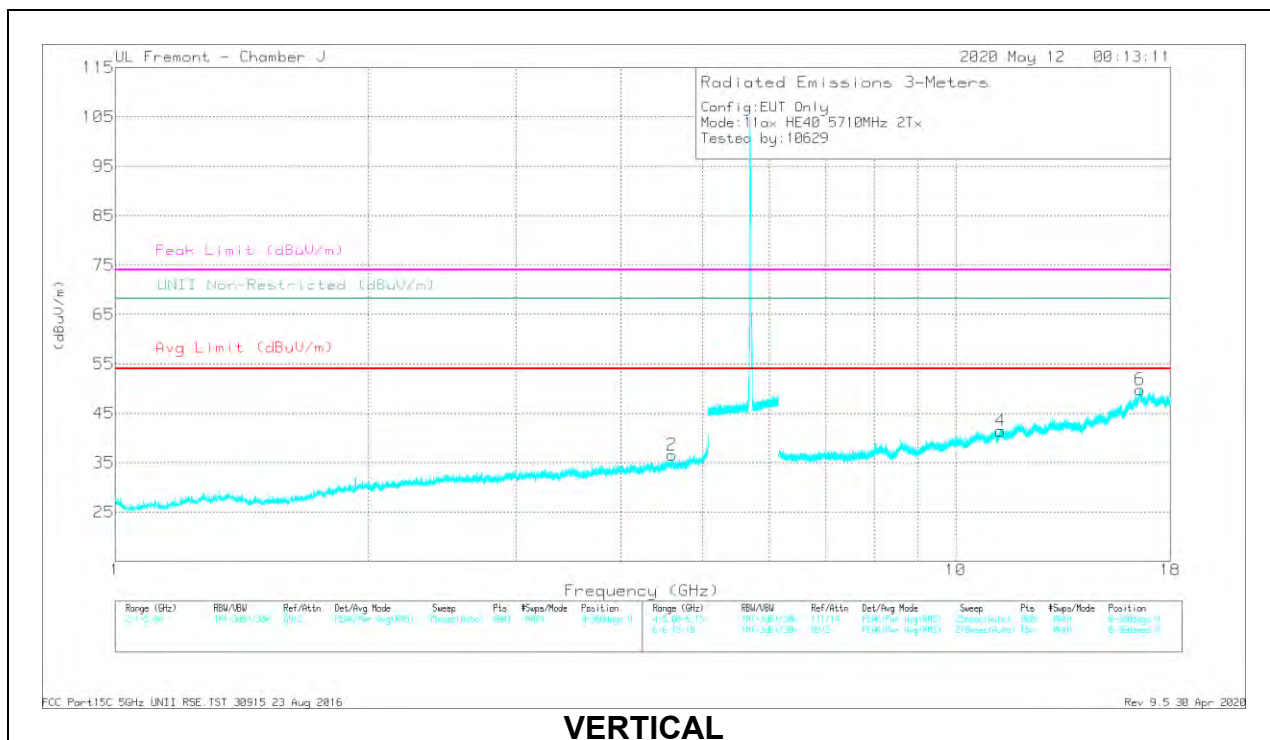

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cdf/Fit/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.59952	39.81	PK-U	34.2	-30.4	43.61	-	-	74	-30.39	-	-	268	380	H
	* 4.59854	29.49	ADR	34.2	-30.4	33.29	54	-20.71	-	-	-	-	268	380	H
2	* 4.59464	39.41	PK-U	34.2	-30.5	43.11	-	-	74	-30.89	-	-	132	156	V
	* 4.5947	29.31	ADR	34.2	-30.5	33.01	54	-20.99	-	-	-	-	132	156	V
3	* 11.30272	34.26	PK-U	38	-23.3	48.96	-	-	74	-25.04	-	-	15	284	H
	* 11.30265	24.65	ADR	38	-23.3	39.35	54	-14.65	-	-	-	-	15	284	H
5	16.60117	33.46	PK-U	42.1	-19	56.56	-	-	-	-	68.2	-11.64	325	131	H
4	* 11.30246	34.87	PK-U	38	-23.3	49.57	-	-	74	-24.43	-	-	117	149	V
	* 11.30236	24.01	ADR	38	-23.3	38.71	54	-15.29	-	-	-	-	117	149	V
6	16.5641	32.68	PK-U	42.1	-19	55.78	-	-	-	-	68.2	-12.42	172	245	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.1.18. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6 GHz BAND

1TX ANT 5 – SU, RU Index 67

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

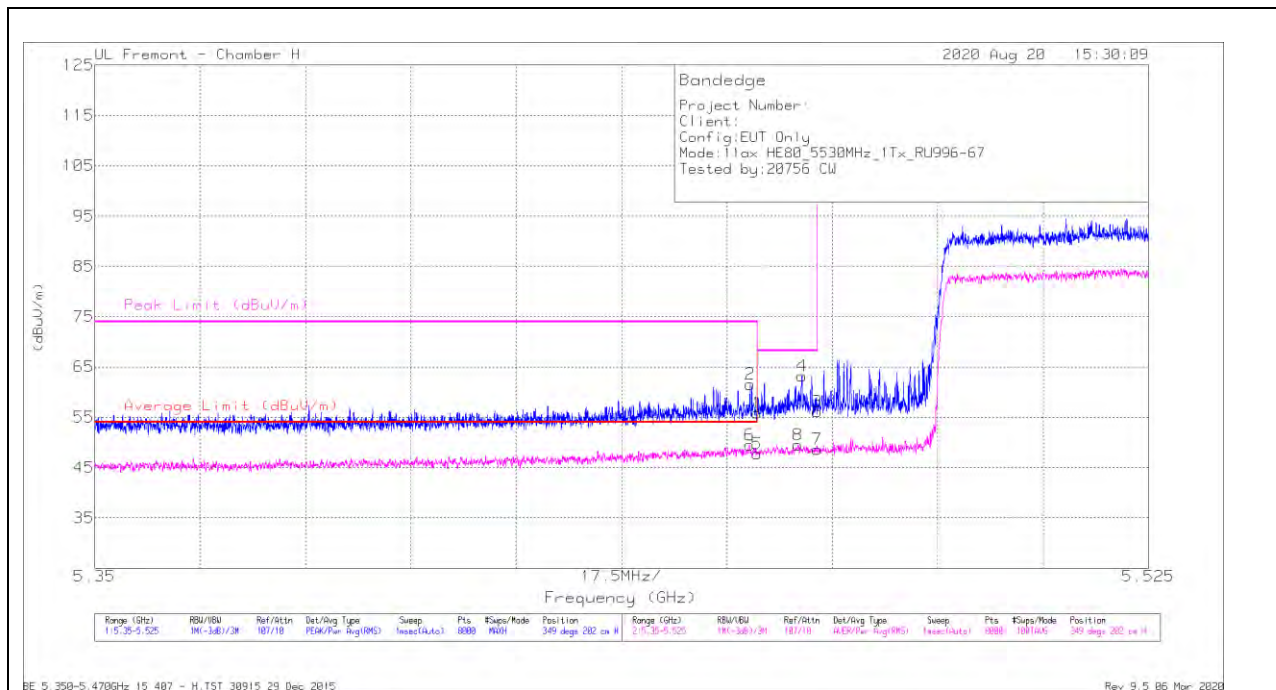

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbll/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.58	Pk	35.2	-20.9	55.88	-	-	74	-18.12	349	202	H
2	* 5.45884	47.14	Pk	35.3	-20.9	61.54	-	-	74	-12.46	349	202	H
5	* 5.45998	33.48	RMS	35.2	-20.9	47.78	54	-6.22	-	-	349	202	H
6	* 5.45871	35.1	RMS	35.3	-20.9	49.5	54	-4.5	-	-	349	202	H
8	5.46681	35.07	RMS	35.3	-20.9	49.47	-	-	-	-	349	202	H
4	5.46744	48.82	Pk	35.3	-20.9	63.22	-	-	68.2	-4.98	349	202	H
3	5.46998	41.85	Pk	35.3	-21	56.15	-	-	68.2	-12.05	349	202	H
7	5.46998	34.31	RMS	35.3	-21	48.61	-	-	-	-	349	202	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

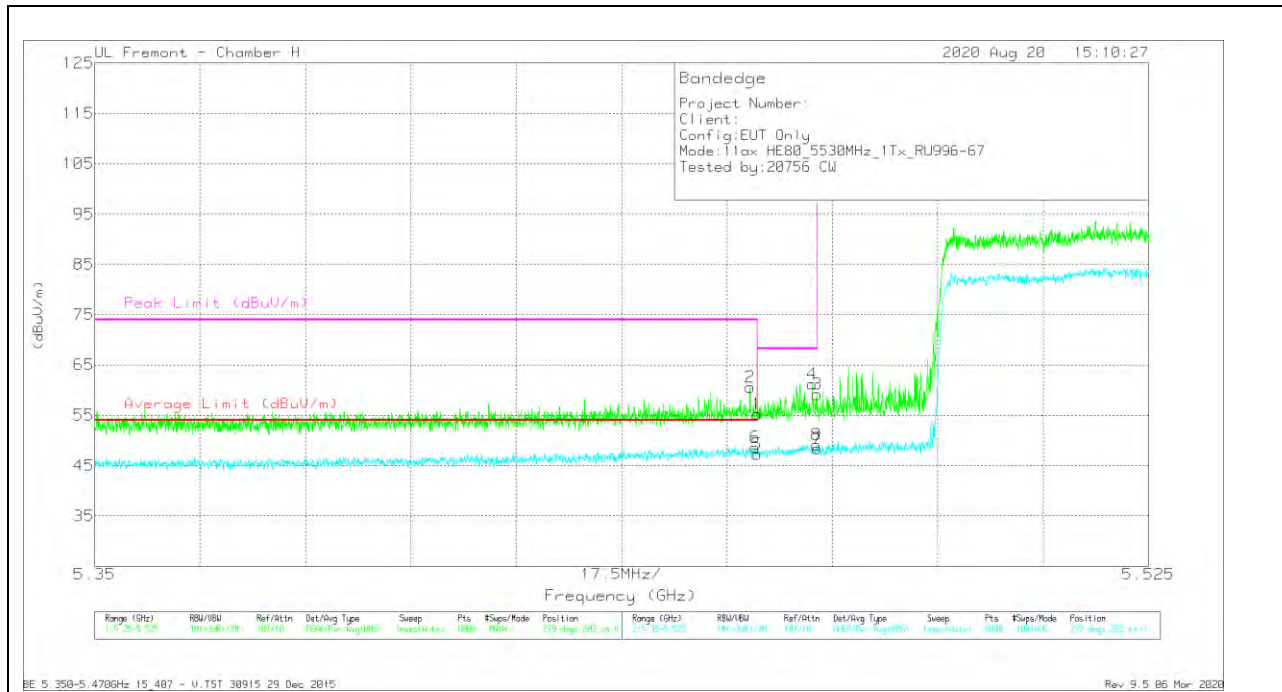


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbll/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.95	Pk	35.2	-20.9	55.25	-	-	74	-18.75	279	202	V
2	* 5.45882	46.25	Pk	35.3	-20.9	60.65	-	-	74	-13.35	279	202	V
5	* 5.45998	32.91	RMS	35.2	-20.9	47.21	54	-6.79	-	-	279	202	V
6	* 5.45965	34.37	RMS	35.2	-20.9	48.67	54	-5.33	-	-	279	202	V
4	5.46915	46.93	Pk	35.3	-21	61.23	-	-	68.2	-6.97	279	202	V
8	5.46991	34.89	RMS	35.3	-21	49.19	-	-	-	-	279	202	V
3	5.46998	44.87	Pk	35.3	-21	59.17	-	-	68.2	-9.03	279	202	V
7	5.46998	34.1	RMS	35.3	-21	48.4	-	-	-	-	279	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANT 5 – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

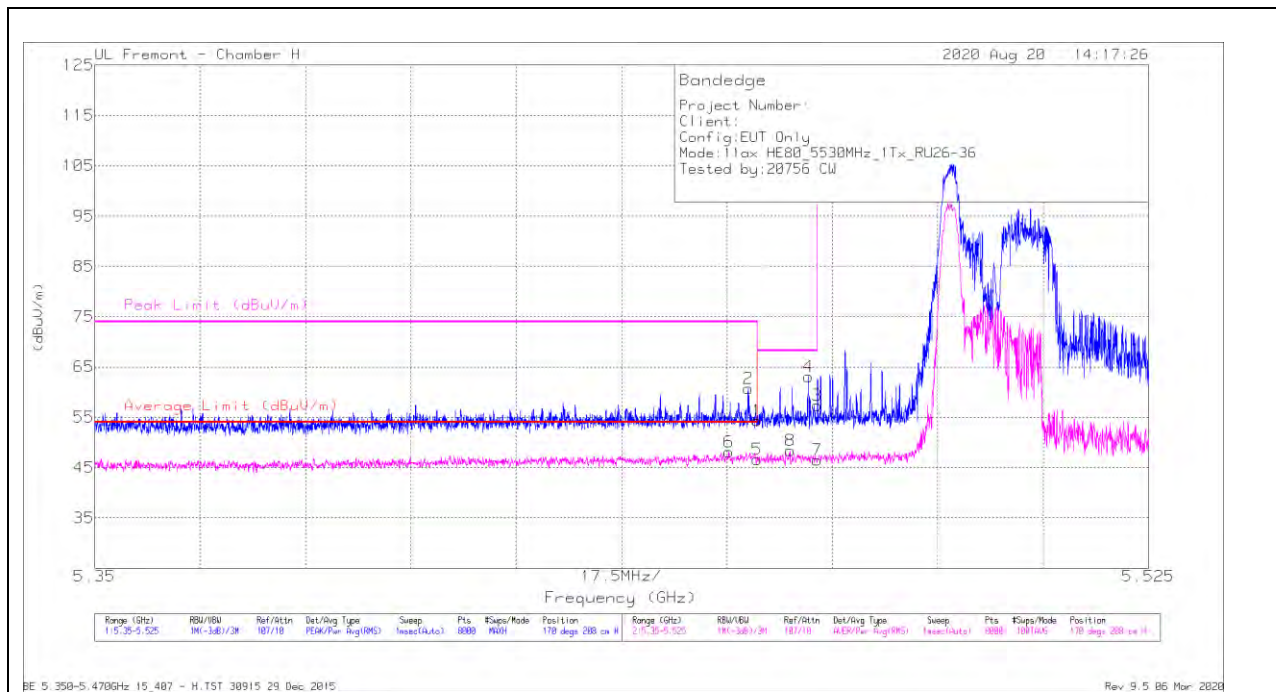

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.06	Pk	35.2	-20.9	54.36	-	-	74	-19.64	170	208	H
2	* 5.45851	46.34	Pk	35.3	-20.9	60.74	-	-	74	-13.26	170	208	H
5	* 5.45998	32.39	RMS	35.2	-20.9	46.69	54	-7.31	-	-	170	208	H
6	* 5.4553	33.76	RMS	35.3	-20.9	48.16	54	-5.84	-	-	170	208	H
8	5.46549	34.12	RMS	35.2	-20.9	48.42	-	-	-	-	170	208	H
4	5.46854	48.79	Pk	35.3	-21	63.09	-	-	68.2	-5.11	170	208	H
3	5.46998	43.06	Pk	35.3	-21	57.36	-	-	68.2	-10.84	170	208	H
7	5.46998	32.2	RMS	35.3	-21	46.5	-	-	-	-	170	208	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

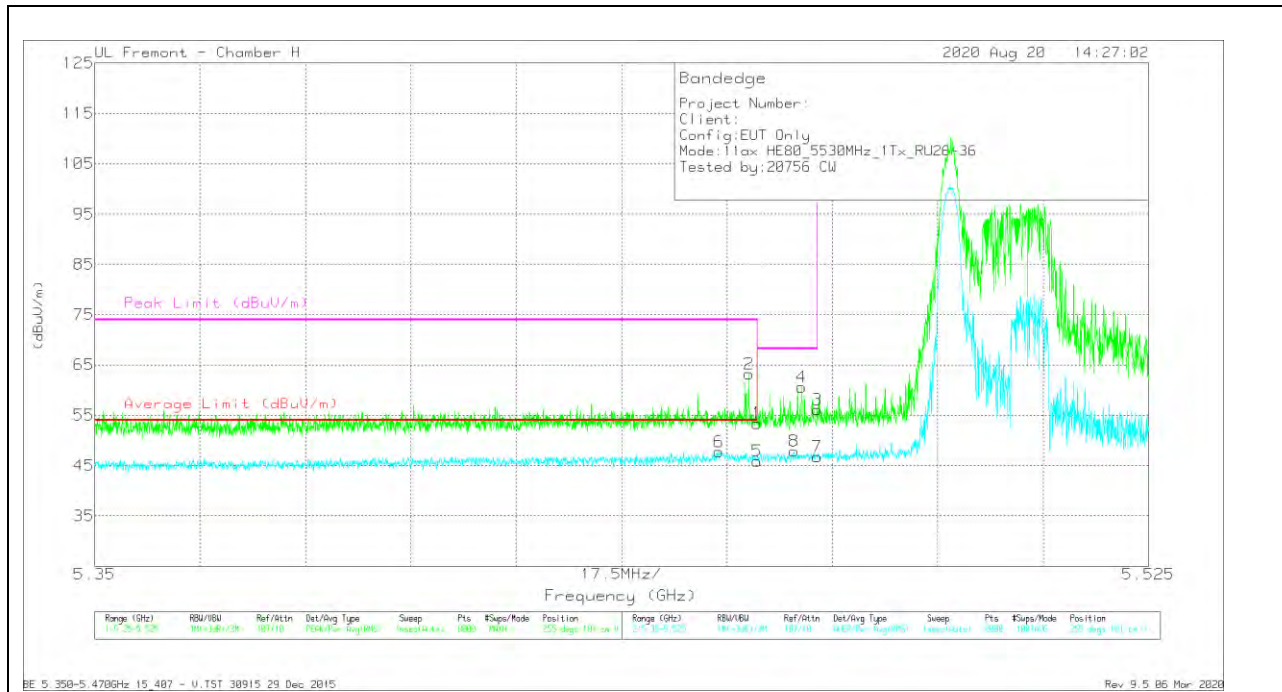


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbll/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.13	Pk	35.2	-20.9	53.43	-	-	74	-20.57	255	101	V
2	* 5.45865	48.84	Pk	35.3	-20.9	63.24	-	-	74	-10.76	255	101	V
5	* 5.45998	31.65	RMS	35.2	-20.9	45.95	54	-8.05	-	-	255	101	V
6	* 5.45364	33.42	RMS	35.2	-20.9	47.72	54	-6.28	-	-	255	101	V
8	5.46613	33.62	RMS	35.2	-20.9	47.92	-	-	-	-	255	101	V
4	5.46738	46.21	Pk	35.3	-20.9	60.61	-	-	68.2	-7.59	255	101	V
3	5.46998	41.81	Pk	35.3	-21	56.11	-	-	68.2	-12.09	255	101	V
7	5.46998	32.42	RMS	35.3	-21	46.72	-	-	-	-	255	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANT 6 – SU, RU Index 67

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

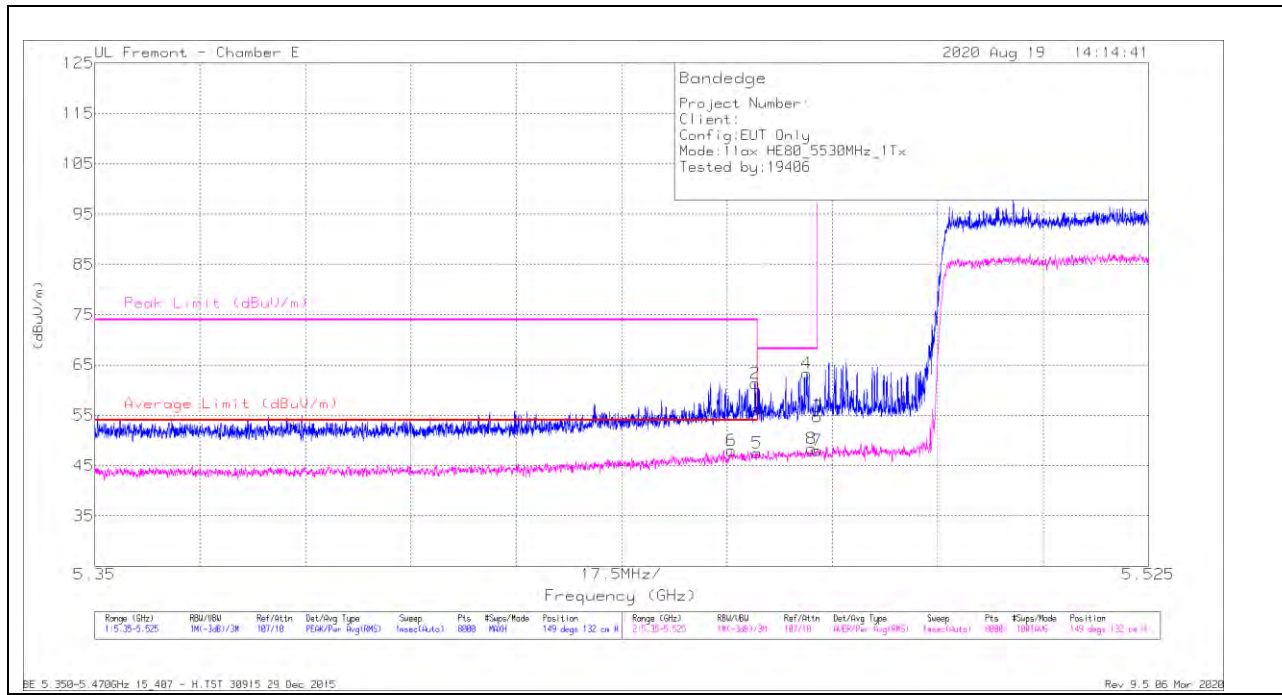

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.45571	35.06	RMS	34.6	-21.7	47.96	54	-6.04	-	-	149	132	H
2	* 5.45965	48.49	Pk	34.6	-21.7	61.39	-	-	74	-12.61	149	132	H
1	* 5.45998	43.43	Pk	34.5	-21.7	56.23	-	-	74	-17.77	149	132	H
5	* 5.45998	34.7	RMS	34.5	-21.7	47.5	54	-6.5	-	-	149	132	H
4	5.46825	50.5	Pk	34.5	-21.7	63.3	-	-	68.2	-4.9	149	132	H
8	5.46904	35.47	RMS	34.6	-21.7	48.37	-	-	-	-	149	132	H
3	5.46998	41.8	Pk	34.6	-21.7	54.7	-	-	68.2	-13.5	149	132	H
7	5.46998	35.12	RMS	34.6	-21.7	48.02	-	-	-	-	149	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

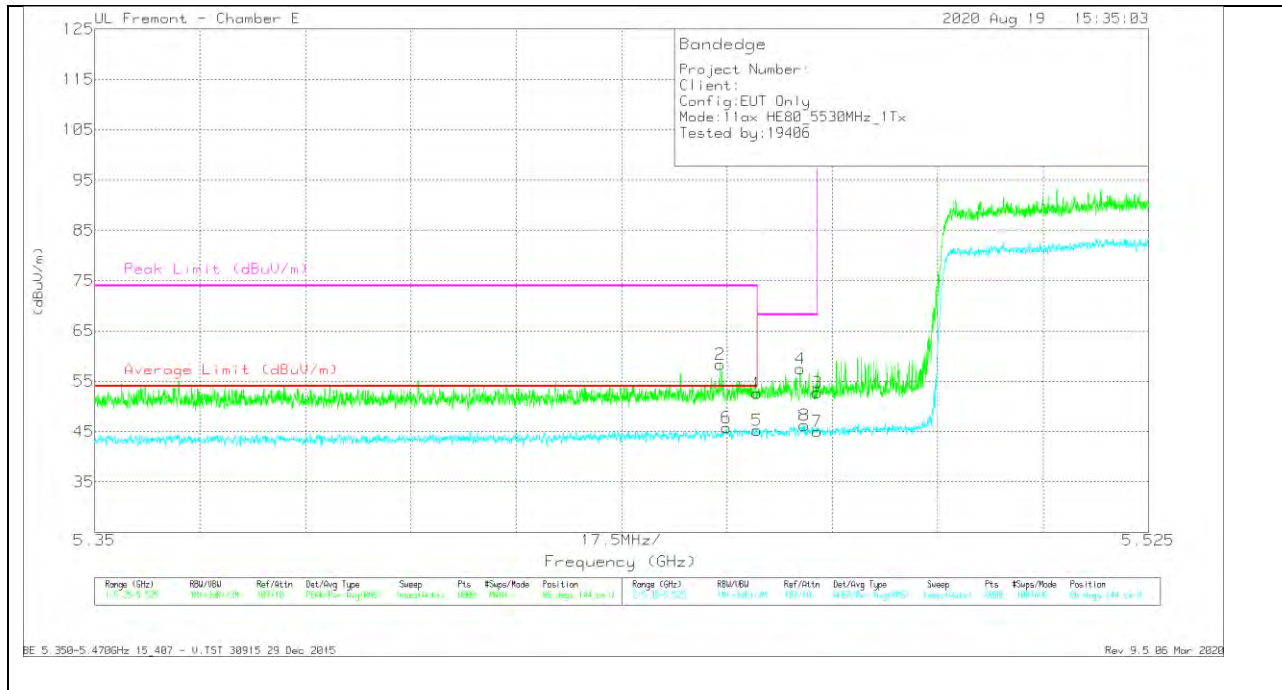


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.78	Pk	34.5	-21.7	52.58	-	-	74	-21.42	86	144	V
2	* 5.45388	45.6	Pk	34.5	-21.7	58.4	-	-	74	-15.6	86	144	V
5	* 5.45998	32.46	RMS	34.5	-21.7	45.26	54	-8.74	-	-	86	144	V
6	* 5.45491	32.85	RMS	34.6	-21.7	45.75	54	-8.25	-	-	86	144	V
4	5.46716	44.71	Pk	34.5	-21.7	57.51	-	-	68.2	-10.69	86	144	V
8	5.46786	33.43	RMS	34.5	-21.7	46.23	-	-	-	-	86	144	V
3	5.46998	39.86	Pk	34.6	-21.7	52.76	-	-	68.2	-15.44	86	144	V
7	5.46998	32.16	RMS	34.6	-21.7	45.06	-	-	-	-	86	144	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANT 6 – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

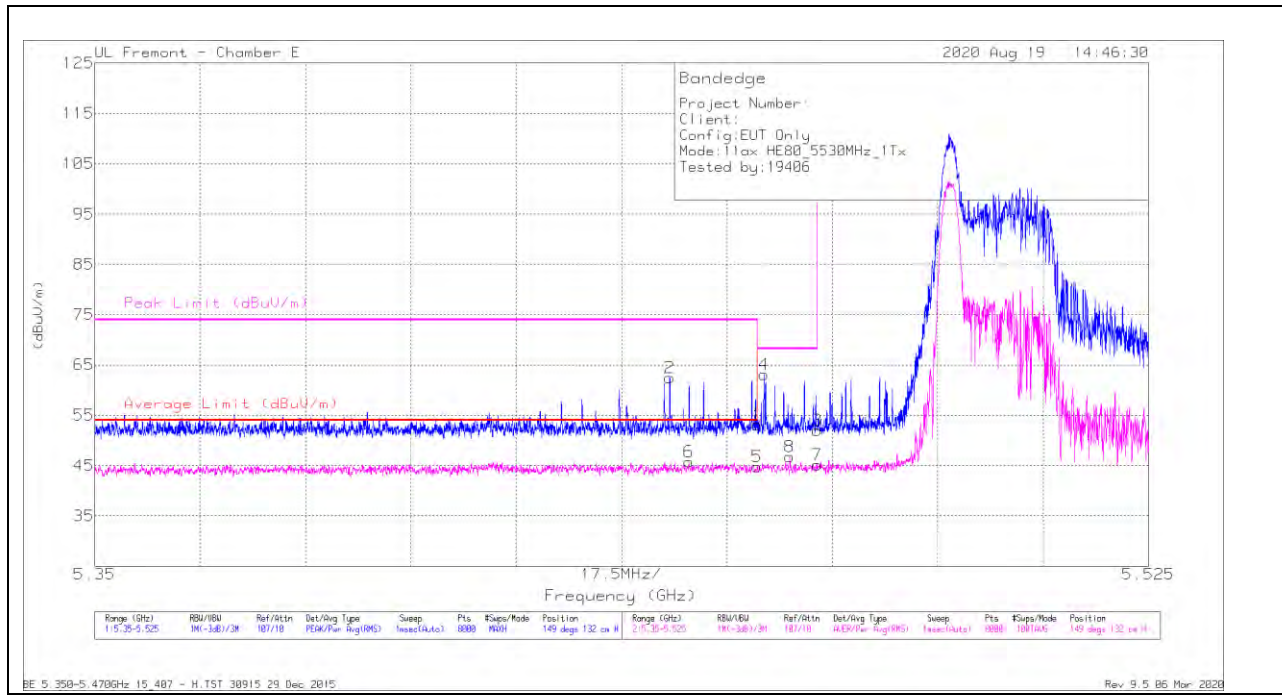

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.4455	49.64	Pk	34.5	-21.7	62.44	-	-	74	-11.56	149	132	H
6	* 5.44869	32.94	RMS	34.5	-21.7	45.74	54	-8.26	-	-	149	132	H
1	* 5.45998	40.36	Pk	34.5	-21.7	53.16	-	-	74	-20.84	149	132	H
5	* 5.45998	31.96	RMS	34.5	-21.7	44.76	54	-9.24	-	-	149	132	H
4	5.46114	50.31	Pk	34.5	-21.7	63.11	-	-	68.2	-5.09	149	132	H
8	5.46543	33.95	RMS	34.5	-21.7	46.75	-	-	-	-	149	132	H
3	5.46998	39.14	Pk	34.6	-21.7	52.04	-	-	68.2	-16.16	149	132	H
7	5.46998	32.3	RMS	34.6	-21.7	45.2	-	-	-	-	149	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

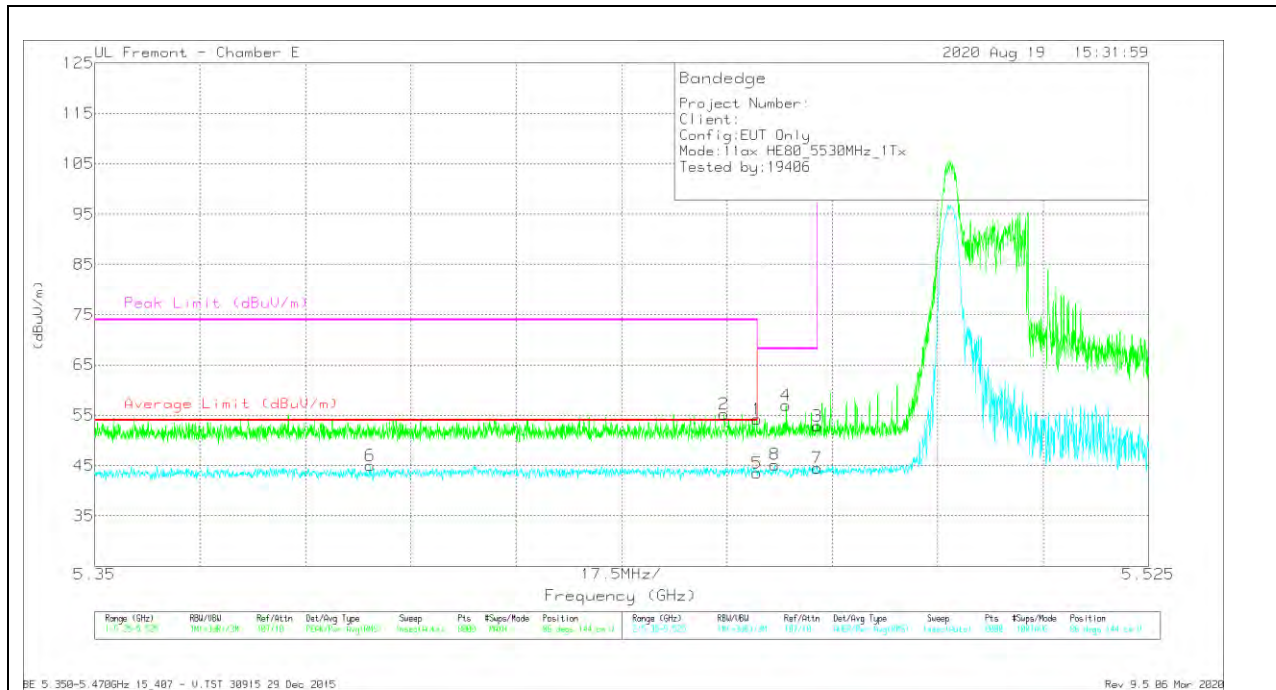


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.43	Pk	34.5	-21.7	54.23	-	-	74	-19.77	86	144	V
2	* 5.45451	42.39	Pk	34.6	-21.7	55.29	-	-	74	-18.71	86	144	V
5	* 5.45998	30.7	RMS	34.5	-21.7	43.5	54	-10.5	-	-	86	144	V
6	* 5.39577	32.17	RMS	34.5	-21.7	44.97	54	-9.03	-	-	86	144	V
8	5.46289	32.41	RMS	34.5	-21.7	45.21	-	-	-	-	86	144	V
4	5.46484	44.14	Pk	34.5	-21.7	56.94	-	-	68.2	-11.26	86	144	V
3	5.46998	39.99	Pk	34.6	-21.7	52.89	-	-	68.2	-15.31	86	144	V
7	5.46998	31.67	RMS	34.6	-21.7	44.57	-	-	-	-	86	144	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

**2TX ANT 5 + ANT 6 OFDMA MODE – 966 Tones, RU Index 67
 BANDEDGE (LOW CHANNEL)**


HORIZONTAL RESULT

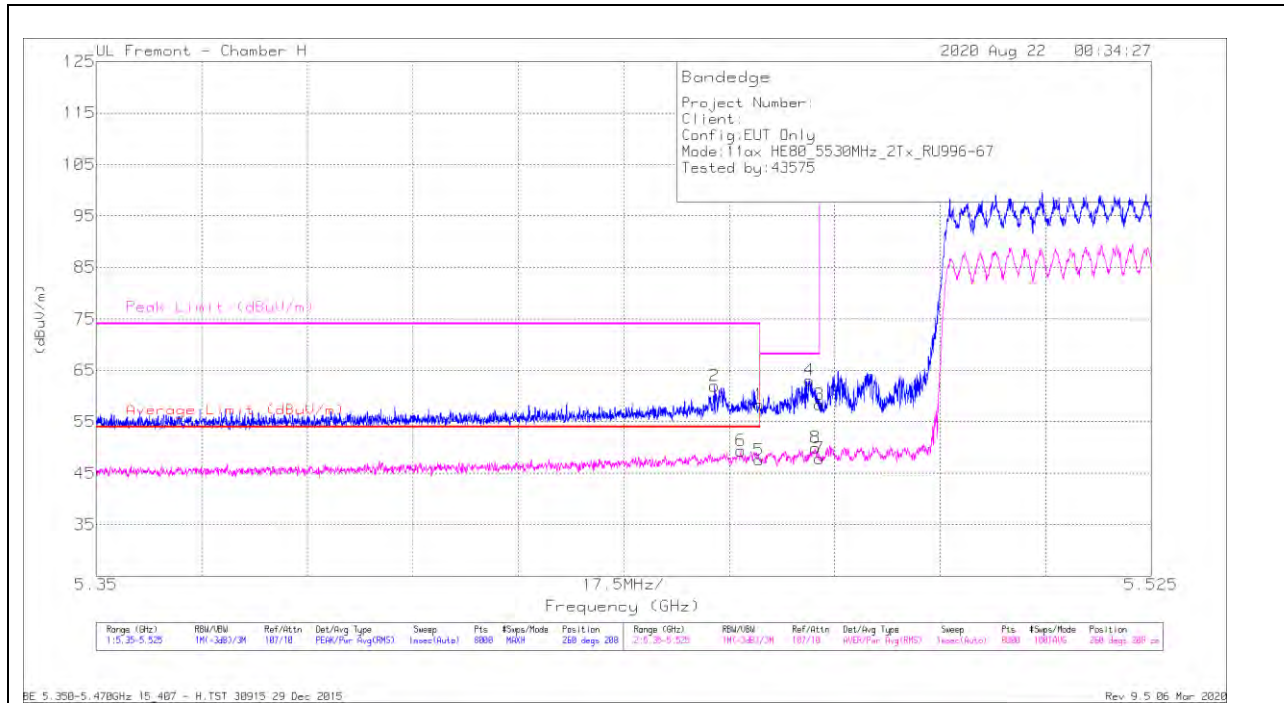

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbll/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	44.03	Pk	35.2	-20.9	58.33	-	-	74	-15.67	260	208	H
2	* 5.45256	47.68	Pk	35.2	-20.9	61.98	-	-	74	-12.02	260	208	H
5	* 5.45998	33.29	RMS	35.2	-20.9	47.59	54	-6.41	-	-	260	208	H
6	* 5.4569	34.99	RMS	35.3	-20.9	49.39	54	-4.61	-	-	260	208	H
4	5.46832	48.65	Pk	35.3	-20.9	63.05	-	-	68.2	-5.15	260	208	H
8	5.4693	35.66	RMS	35.3	-21	49.96	-	-	-	-	260	208	H
3	5.46998	44.04	Pk	35.3	-21	58.34	-	-	68.2	-9.86	260	208	H
7	5.46998	33.6	RMS	35.3	-21	47.9	-	-	-	-	260	208	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

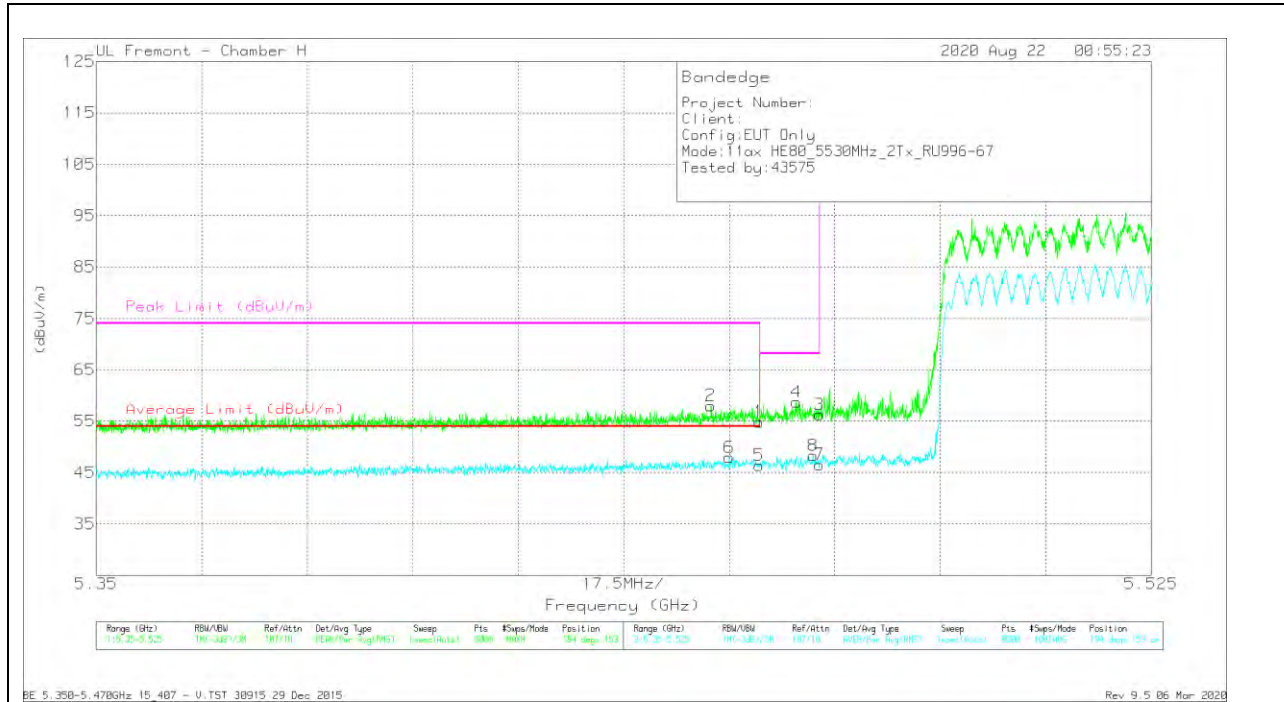


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.45195	43.73	Pk	35.2	-20.9	58.03	-	-	74	-15.97	194	153	V
6	* 5.45499	33.53	RMS	35.3	-20.9	47.93	54	-6.07	-	-	194	153	V
1	* 5.45998	40.57	Pk	35.2	-20.9	54.87	-	-	74	-19.13	194	153	V
5	* 5.45998	32.11	RMS	35.2	-20.9	46.41	54	-7.59	-	-	194	153	V
4	5.46615	44.39	Pk	35.2	-20.9	58.69	-	-	68.2	-9.51	194	153	V
8	5.46889	34.03	RMS	35.3	-21	48.33	-	-	-	-	194	153	V
3	5.46998	41.95	Pk	35.3	-21	56.25	-	-	68.2	-11.95	194	153	V
7	5.46998	32.22	RMS	35.3	-21	46.52	-	-	-	-	194	153	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

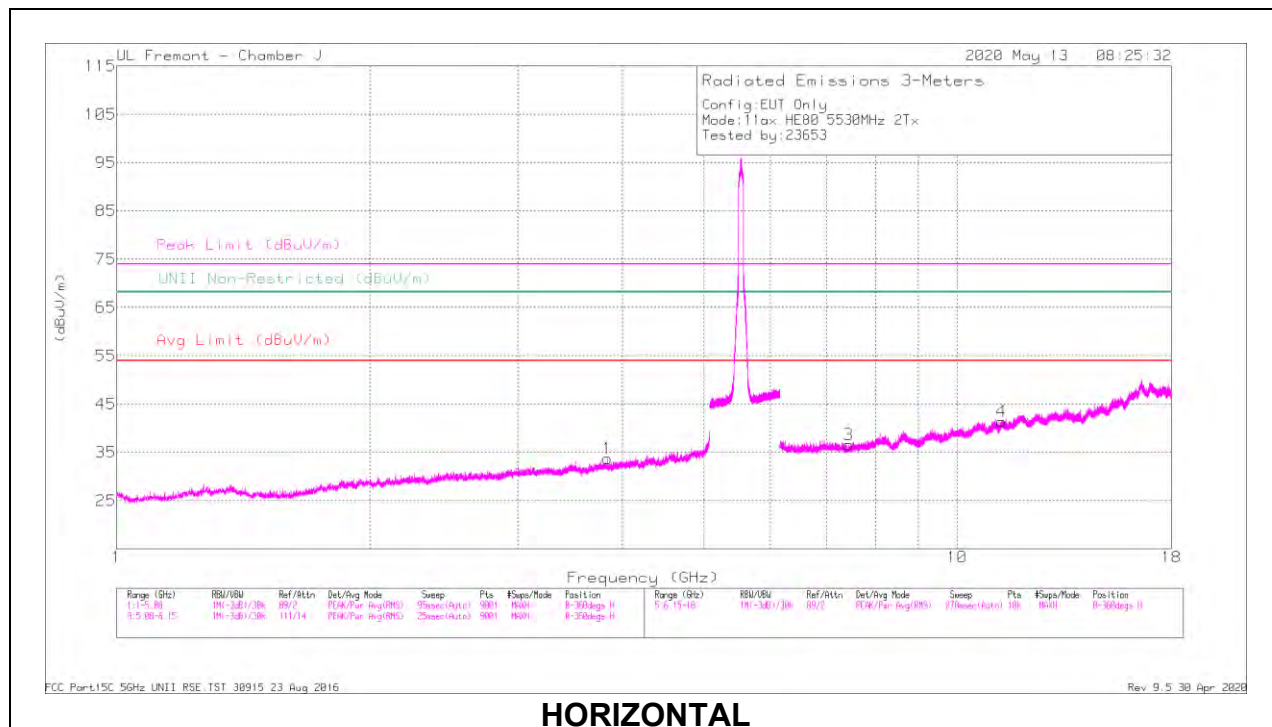

HORIZONTAL

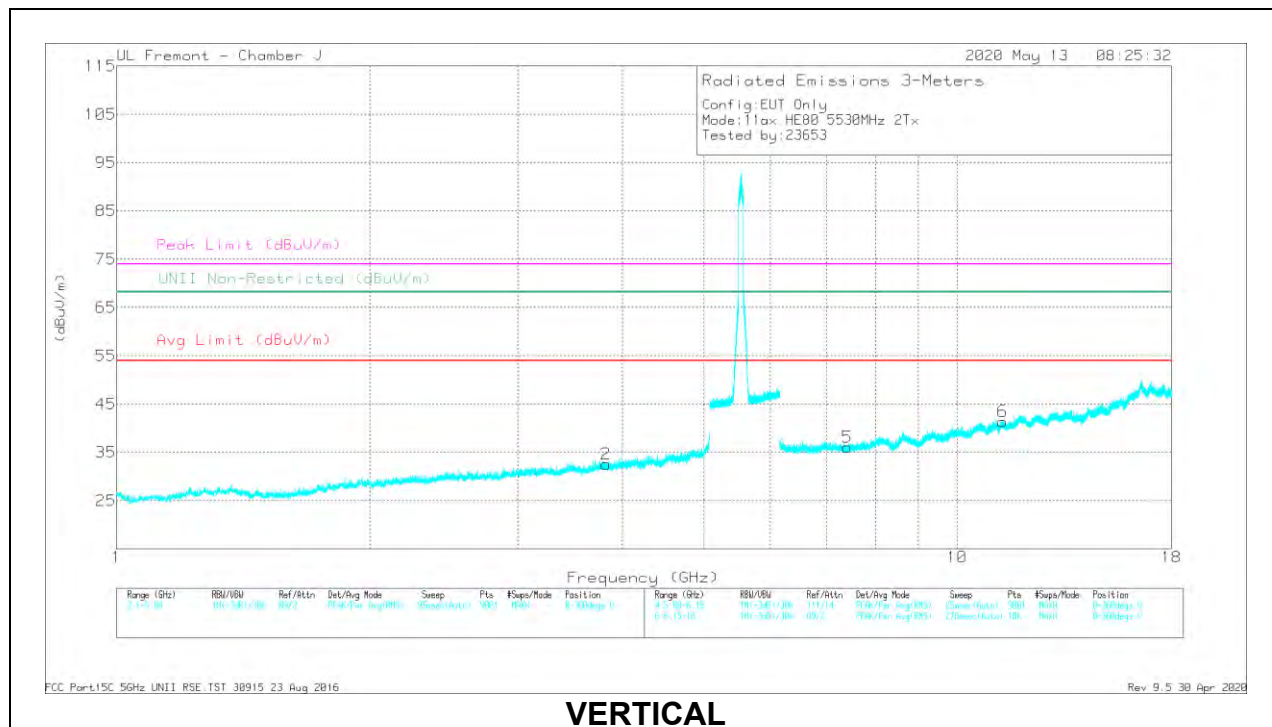


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Mask Reading (dBµV)	Det	AF T34 (dBm)	Amp/Cat Filter/Pad (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNI Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degree)	Height (cm)	Polarity
1	* 3.83697	40.1	PK-U	33.6	-32.3	41.4	-	-	74	-32.6	-	-	318	332	H
	* 3.83695	29.57	ADR	33.6	-32.3	31.04	54	-22.96	-	-	-	-	318	332	H
2	* 3.81997	39.74	PK-U	33.5	-32.4	40.84	-	-	74	-33.16	-	-	52	234	V
	* 3.82236	29.54	ADR	33.5	-32.4	30.81	54	-23.19	-	-	-	-	52	234	V
3	* 7.43685	36.13	PK-U	35.6	-27.5	44.23	-	-	74	-29.77	-	-	172	219	H
	* 7.43686	26.5	ADR	35.6	-27.5	38.77	54	-19.23	-	-	-	-	172	219	H
4	* 11.29391	34.03	PK-U	38	-23.3	43.95	-	-	74	-25.02	-	-	286	144	H
	* 11.29351	24.24	ADR	38	-23.3	39.11	54	-14.89	-	-	-	-	286	144	H
5	* 7.40211	36.67	PK-U	35.6	-27.5	44.77	-	-	74	-29.23	-	-	213	310	V
	* 7.40261	26.48	ADR	35.6	-27.5	38.65	54	-19.35	-	-	-	-	213	310	V
6	* 11.33353	33.89	PK-U	38	-23.9	43.98	-	-	74	-25.02	-	-	117	250	V
	* 11.33385	23.73	ADR	38	-23	38.9	54	-15.1	-	-	-	-	117	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

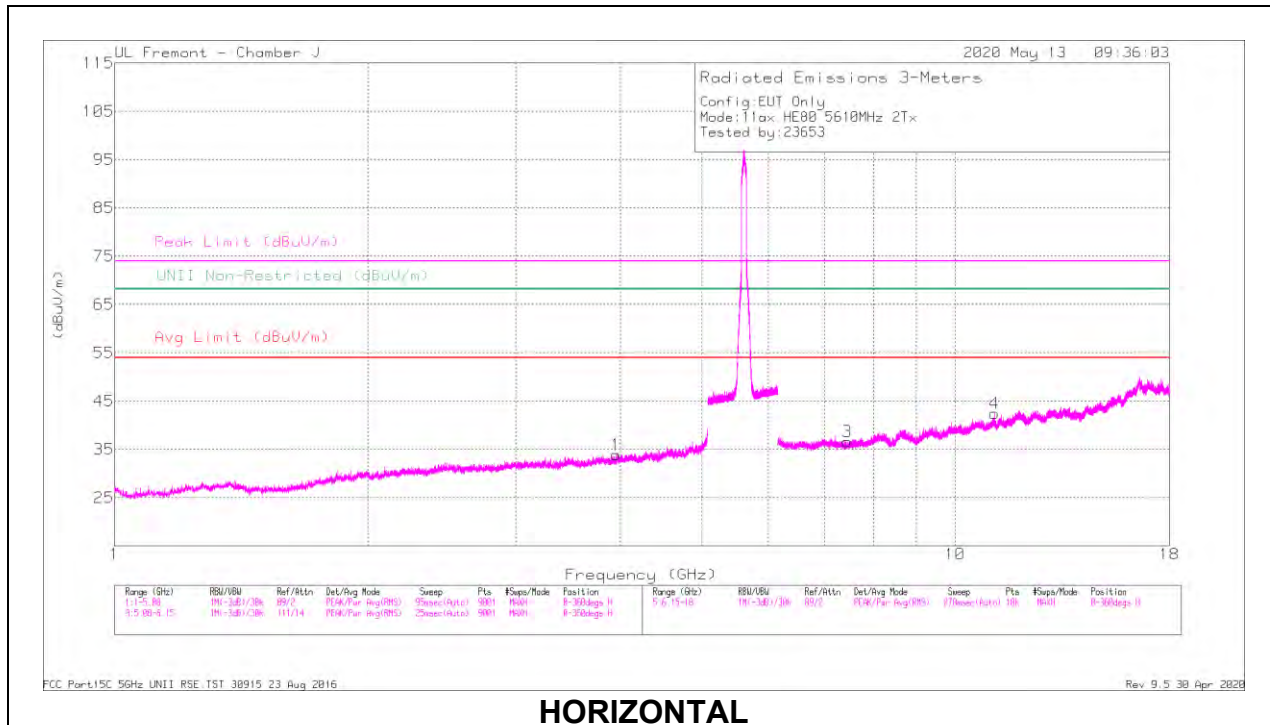

HORIZONTAL

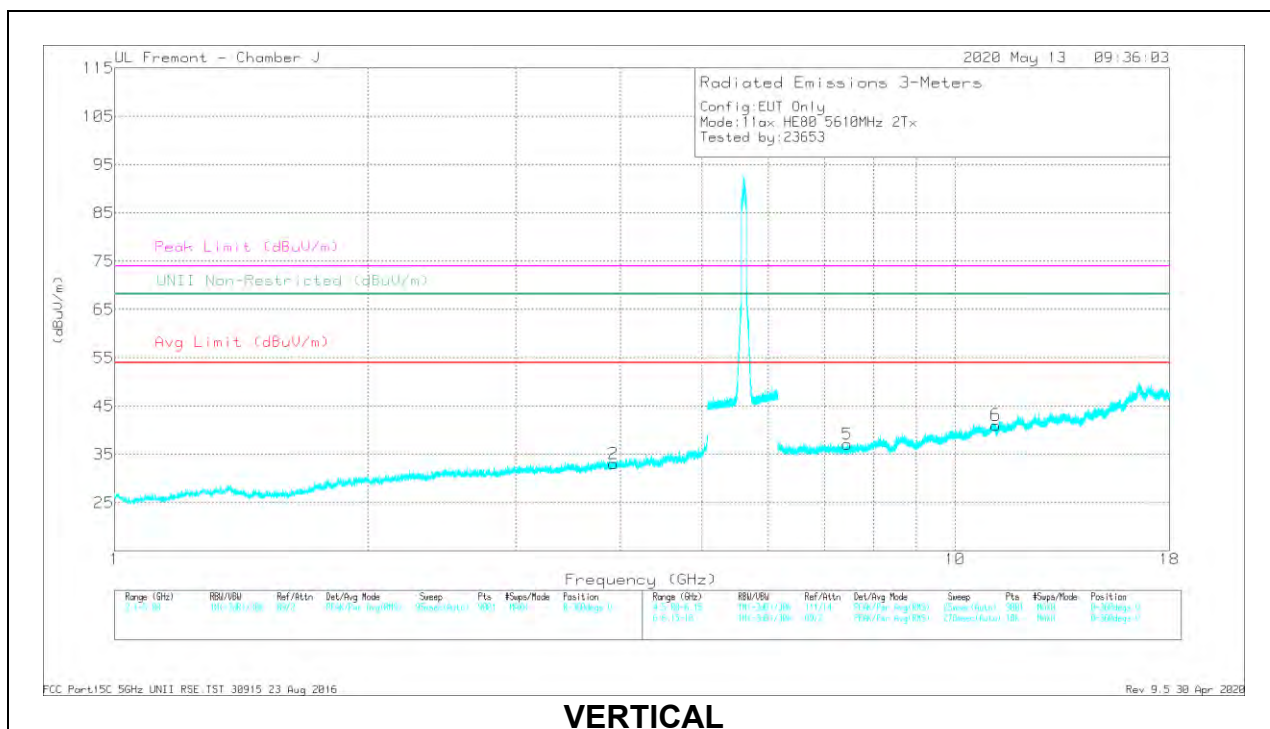


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Mask Reading (dBuV)	Det	AF T34 (dBm)	Amp/Corr/Freq (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.95208	41.12	PK-U	33.4	-32.4	42.12	-	-	74	-31.88	-	-	194	143	H
	* 3.95215	30.37	ADR	33.4	-32.4	31.55	54	-22.46	-	-	-	-	194	143	H
2	* 3.92492	40.91	PK-U	33.4	-32.4	41.91	-	-	74	-32.09	-	-	284	177	V
	* 3.92266	29.84	ADR	33.4	-32.4	31.01	54	-22.99	-	-	-	-	284	177	V
3	* 7.44536	36.17	PK-U	35.5	-27.5	44.17	-	-	74	-29.83	-	-	88	249	H
	* 7.44176	25.36	ADR	35.5	-27.5	34.23	54	-19.77	-	-	-	-	88	249	H
4	* 11.15277	34.57	PK-U	38	-23.7	48.87	-	-	74	-25.13	-	-	321	133	H
	* 11.15278	24.31	ADR	38	-23.7	38.78	54	-15.22	-	-	-	-	321	133	H
5	* 7.4496	36.31	PK-U	35.6	-27.5	44.41	-	-	74	-29.59	-	-	227	211	V
	* 7.44994	26.87	ADR	35.6	-27.5	34.73	54	-19.26	-	-	-	-	227	211	V
6	* 11.19171	33.54	PK-U	38	-23.7	47.84	-	-	74	-26.16	-	-	130	200	V
	* 11.19176	23.67	ADR	38	-23.7	38.14	54	-15.86	-	-	-	-	130	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 138 RESULTS

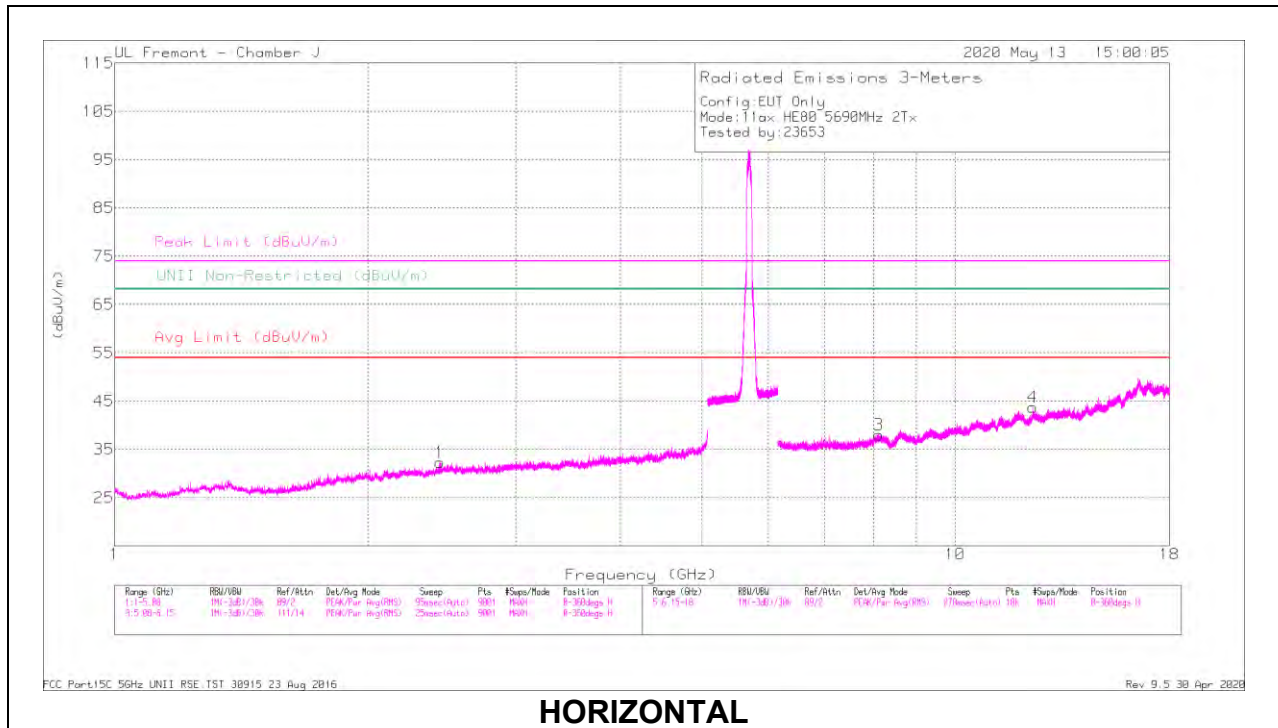

HORIZONTAL

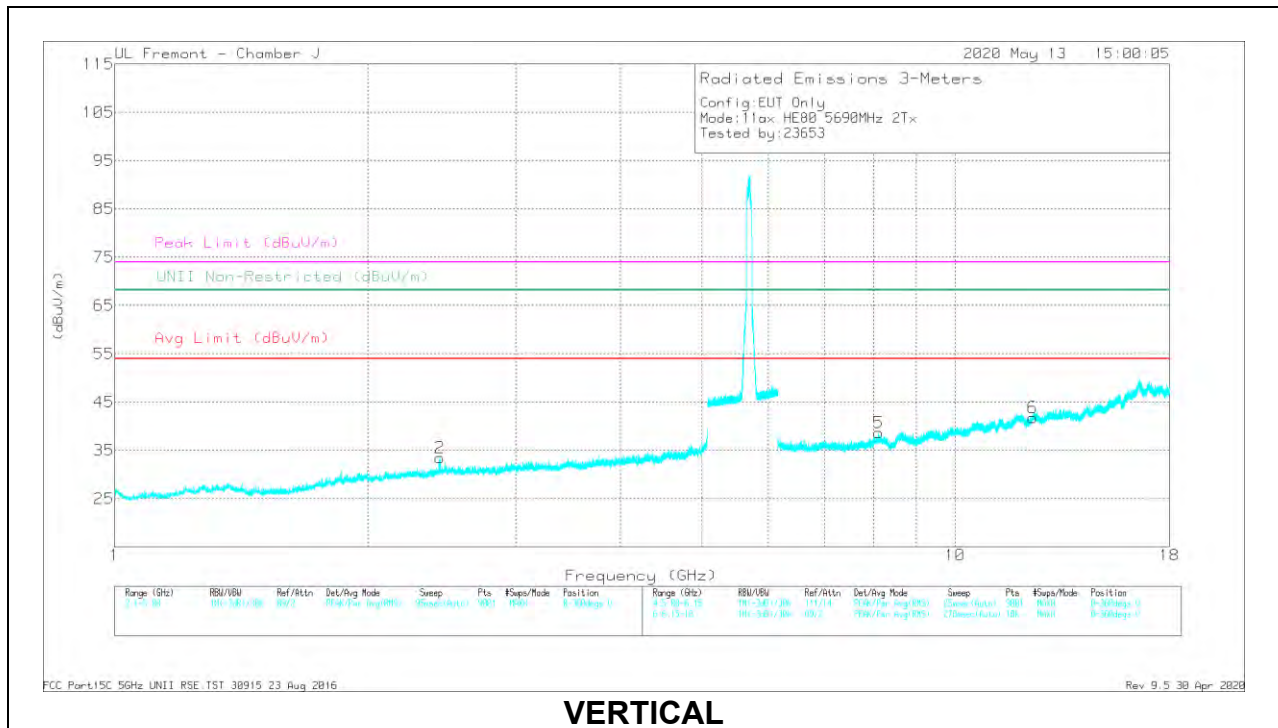

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Mask Reading (dBuV)	Det	AF T34 (dBm)	Amp/Coeff/Ref (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.44033	42.02	PK-U	32.1	-35.3	39.72	-	-	-	-	68.2	-28.48	357	101	H
	2.43813	32.45	ADR	32.2	-35.2	29.62	-	-	-	-	-	-	357	101	H
2	2.44116	42.59	PK-U	32.1	-35.3	39.39	-	-	-	-	68.2	-28.81	213	166	V
	2.4395	32.12	ADR	32.1	-35.2	29.19	-	-	-	-	-	-	213	166	V
3	* 8.10697	36.34	PK-U	35.7	-27	45.04	-	-	74	-28.96	-	-	57	256	H
	* 8.10645	26.47	ADR	35.7	-27	35.34	54	-18.66	-	-	-	-	57	256	H
4	* 12.37817	33.39	PK-U	39	-22	50.39	-	-	74	-23.61	-	-	168	176	H
	* 12.37652	23.51	ADR	39	-22	40.68	54	-13.32	-	-	-	-	168	176	H
5	* 8.11307	37.36	PK-U	35.7	-27	46.06	-	-	74	-27.94	-	-	84	269	V
	* 8.11154	26.62	ADR	35.7	-27	35.49	54	-18.51	-	-	-	-	84	269	V
6	* 12.37991	33.36	PK-U	39	-22	50.36	-	-	74	-23.64	-	-	226	199	V
	* 12.37388	23.15	ADR	39	-22	40.32	54	-13.68	-	-	-	-	226	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX ANT 5 + ANT 6 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

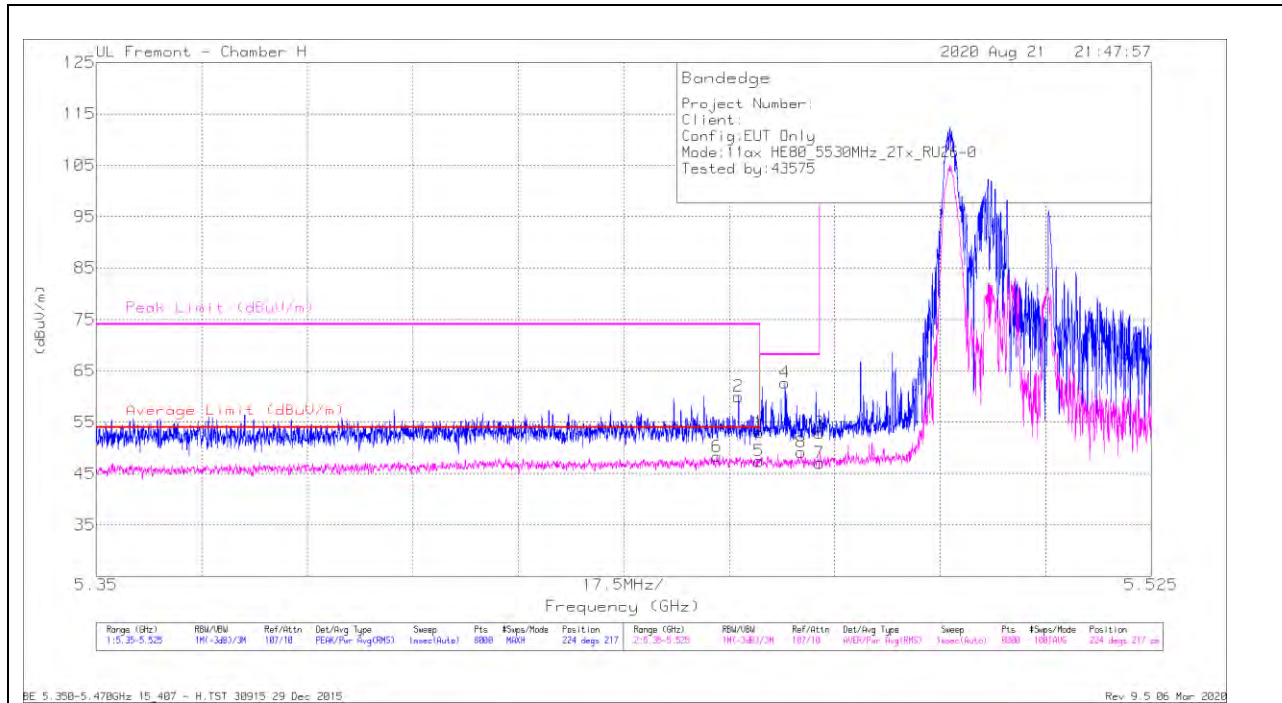

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbll/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	38.65	Pk	35.2	-20.9	52.95	-	-	74	-21.05	224	217	H
2	* 5.45655	45.6	Pk	35.3	-20.9	60	-	-	74	-14	224	217	H
5	* 5.45998	33.13	RMS	35.2	-20.9	47.43	54	-6.57	-	-	224	217	H
6	* 5.45296	34.01	RMS	35.2	-20.9	48.31	54	-5.69	-	-	224	217	H
4	5.46425	48.39	Pk	35.2	-20.9	62.69	-	-	68.2	-5.51	224	217	H
8	5.46692	34.75	RMS	35.3	-20.9	49.15	-	-	-	-	224	217	H
3	5.46998	38.56	Pk	35.3	-21	52.86	-	-	68.2	-15.34	224	217	H
7	5.46998	32.76	RMS	35.3	-21	47.06	-	-	-	-	224	217	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

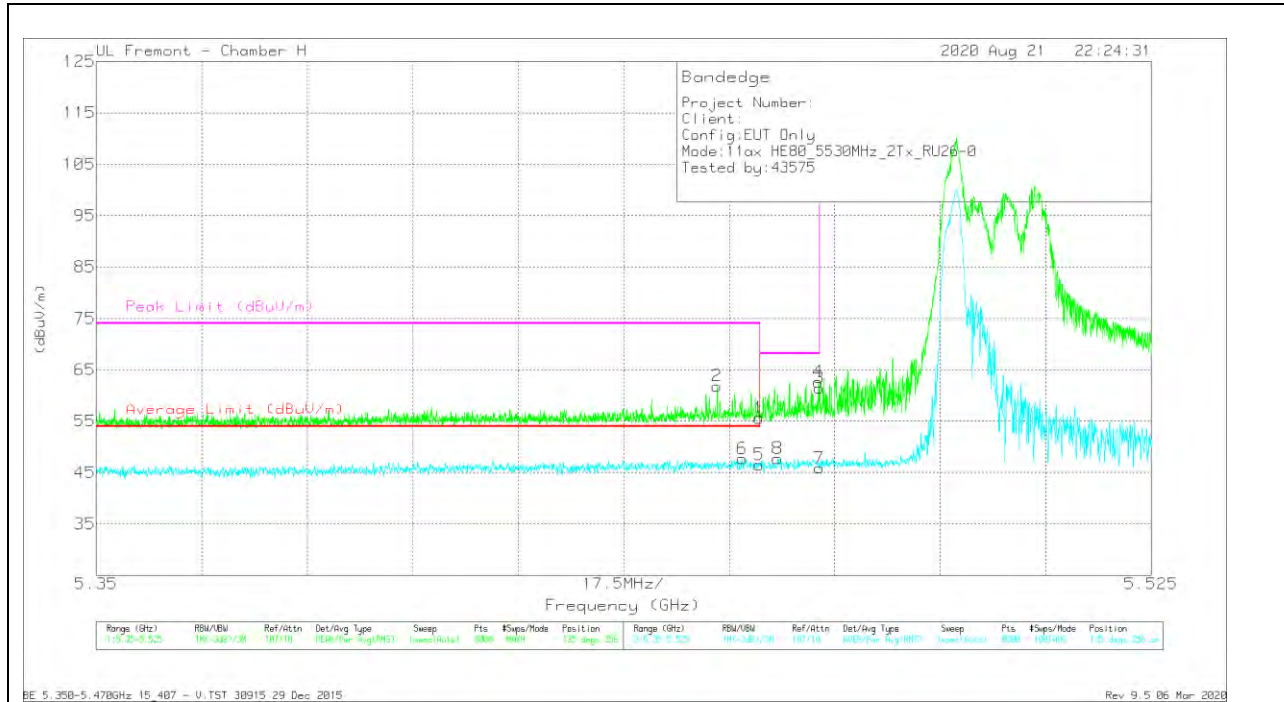


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.31	Pk	35.2	-20.9	55.61	-	-	74	-18.39	135	256	V
2	* 5.453	47.54	Pk	35.2	-20.9	61.84	-	-	74	-12.16	135	256	V
5	* 5.45998	32.23	RMS	35.2	-20.9	46.53	54	-7.47	-	-	135	256	V
6	* 5.45714	33.3	RMS	35.3	-20.9	47.7	54	-6.3	-	-	135	256	V
8	5.46302	33.43	RMS	35.2	-20.9	47.73	-	-	-	-	135	256	V
4	5.46976	48.35	Pk	35.3	-21	62.65	-	-	68.2	-5.55	135	256	V
3	5.46998	47.17	Pk	35.3	-21	61.47	-	-	68.2	-6.73	135	256	V
7	5.46998	31.57	RMS	35.3	-21	45.87	-	-	-	-	135	256	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection


2TX ANT 5 + ANT 6 OFDMA MODE – 26 Tones, RU Index 36

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

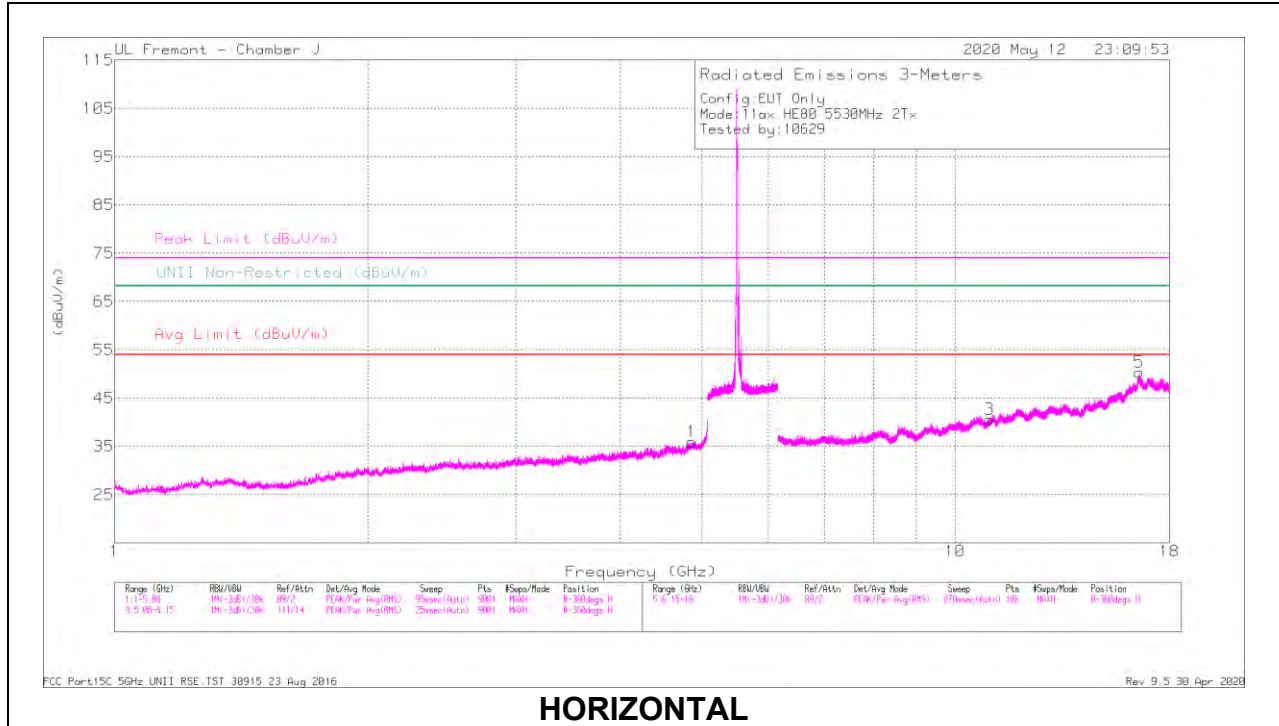

HORIZONTAL

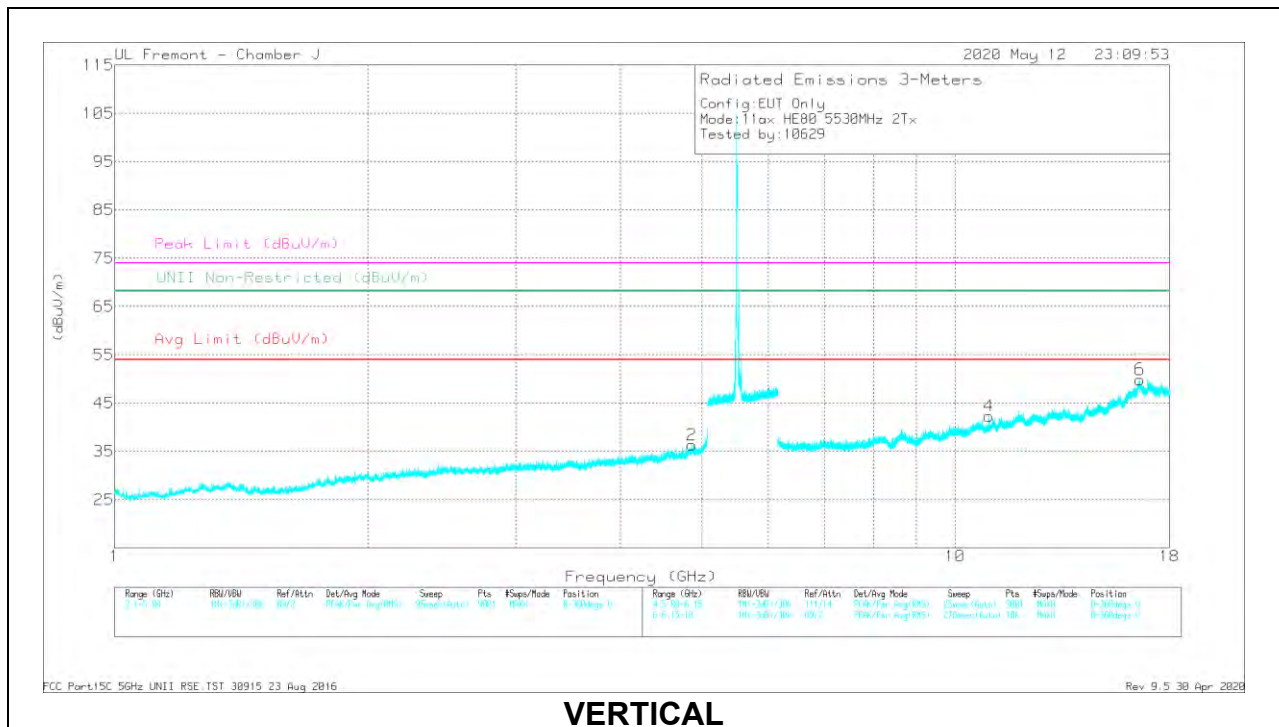


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Ftr/Psd (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.86555	39.85	PK-U	34.1	-30	43.95	-	-	74	-30.05	-	-	327	368	H
	* 4.86401	29.23	ADR	34.1	-30	33.33	54	-20.67	-	-	-	-	327	368	H
2	* 4.86621	39.23	PK-U	34.1	-30	43.33	-	-	74	-30.67	-	-	251	309	V
	* 4.86399	29.97	ADR	34.1	-30	34.07	54	-19.93	-	-	-	-	251	309	V
3	* 10.98592	35.02	PK-U	38	-24.1	48.92	-	-	74	-25.08	-	-	301	175	H
	* 10.98727	24.31	ADR	38	-24.1	38.21	54	-15.79	-	-	-	-	301	175	H
5	16.56546	33.43	PK-U	42.1	-19	56.53	-	-	-	-	68.2	-11.67	176	213	H
4	* 10.98614	33.89	PK-U	38	-24.1	47.79	-	-	74	-26.21	-	-	105	194	V
	* 10.98653	24.14	ADR	38	-24.1	38.04	54	-15.96	-	-	-	-	105	194	V
6	16.59143	33.7	PK-U	42.1	-19	56.8	-	-	-	-	68.2	-11.4	291	110	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

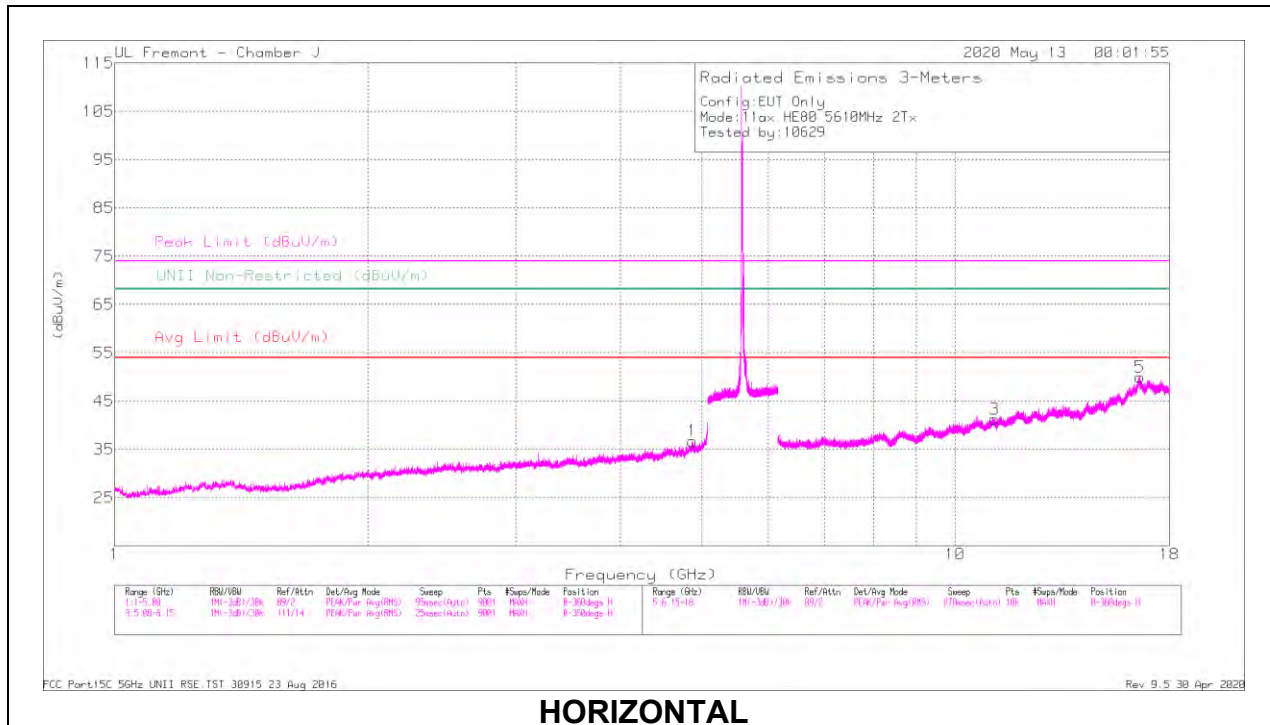

HORIZONTAL

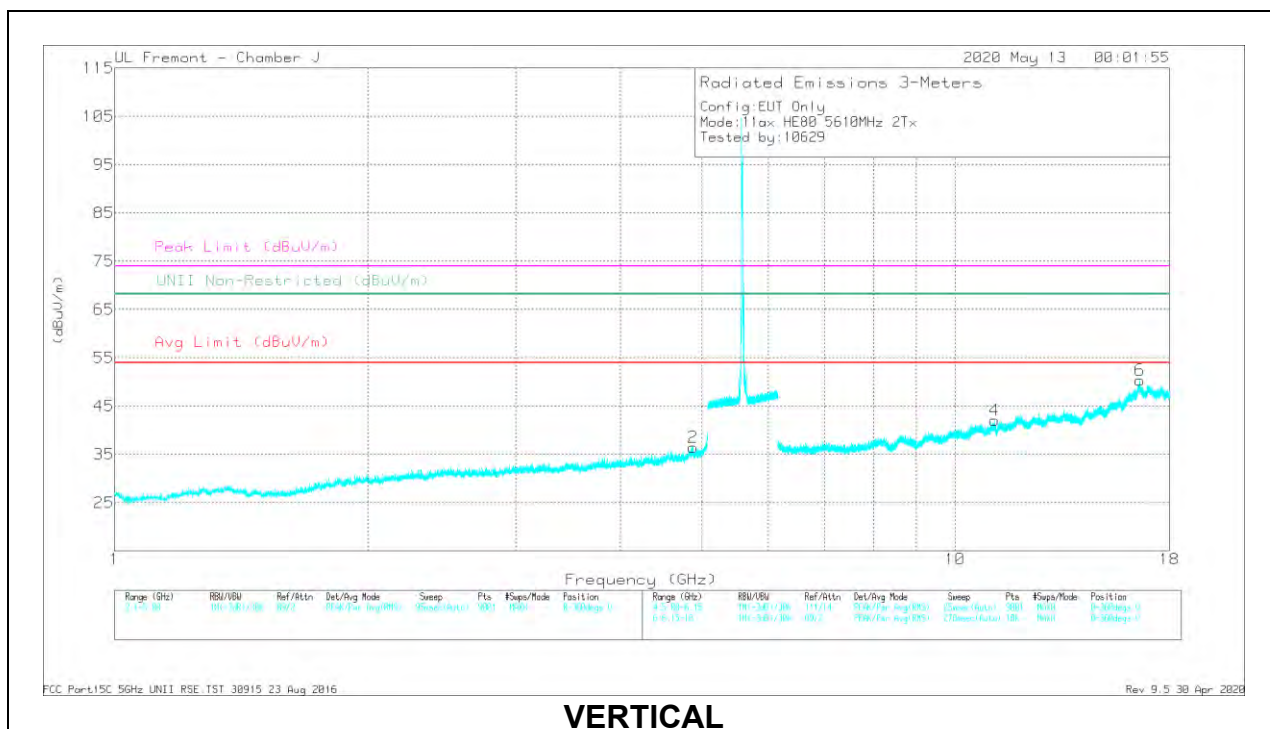


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.87357	39.03	PK-U	34.1	-29.7	43.43	-	-	74	-30.57	-	-	314	306	H
	* 4.87379	29.08	ADR	34.1	-29.7	33.48	54	-20.52	-	-	-	-	314	306	H
2	* 4.87731	39.01	PK-U	34.2	-29.7	43.51	-	-	74	-30.49	-	-	146	179	V
	* 4.87575	28.94	ADR	34.2	-29.7	33.44	54	-20.56	-	-	-	-	146	179	V
3	* 11.14857	34.79	PK-U	38	-23.7	49.09	-	-	74	-24.91	-	-	226	231	H
	* 11.14479	23.98	ADR	38	-23.7	38.28	54	-15.72	-	-	-	-	226	231	H
5	16.59978	32.77	PK-U	42.2	-19	55.97	-	-	-	-	68.2	-12.23	164	309	H
	* 11.14409	34.25	PK-U	38	-23.7	48.55	-	-	74	-25.45	-	-	68	179	V
4	* 11.14299	25.11	ADR	38	-23.7	39.41	54	-14.59	-	-	-	-	68	179	V
	16.5934	32.92	PK-U	42.1	-19	56.02	-	-	-	-	68.2	-12.18	180	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 138 RESULTS

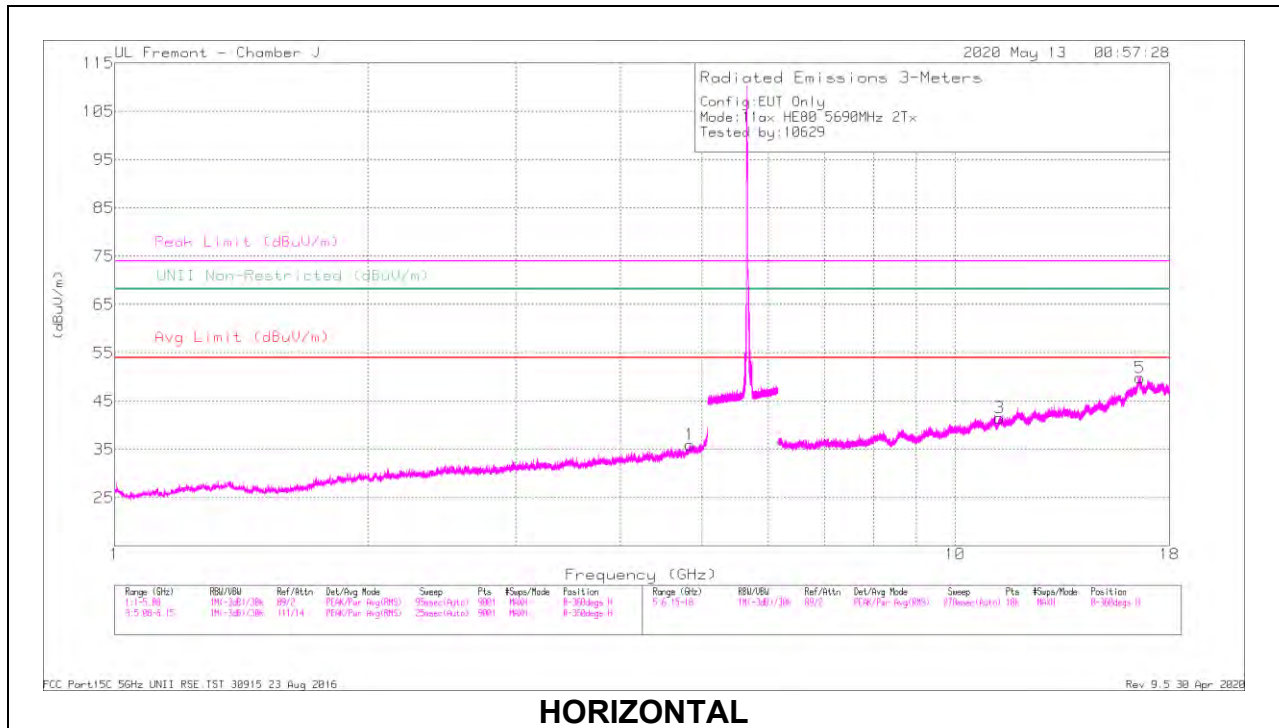

HORIZONTAL

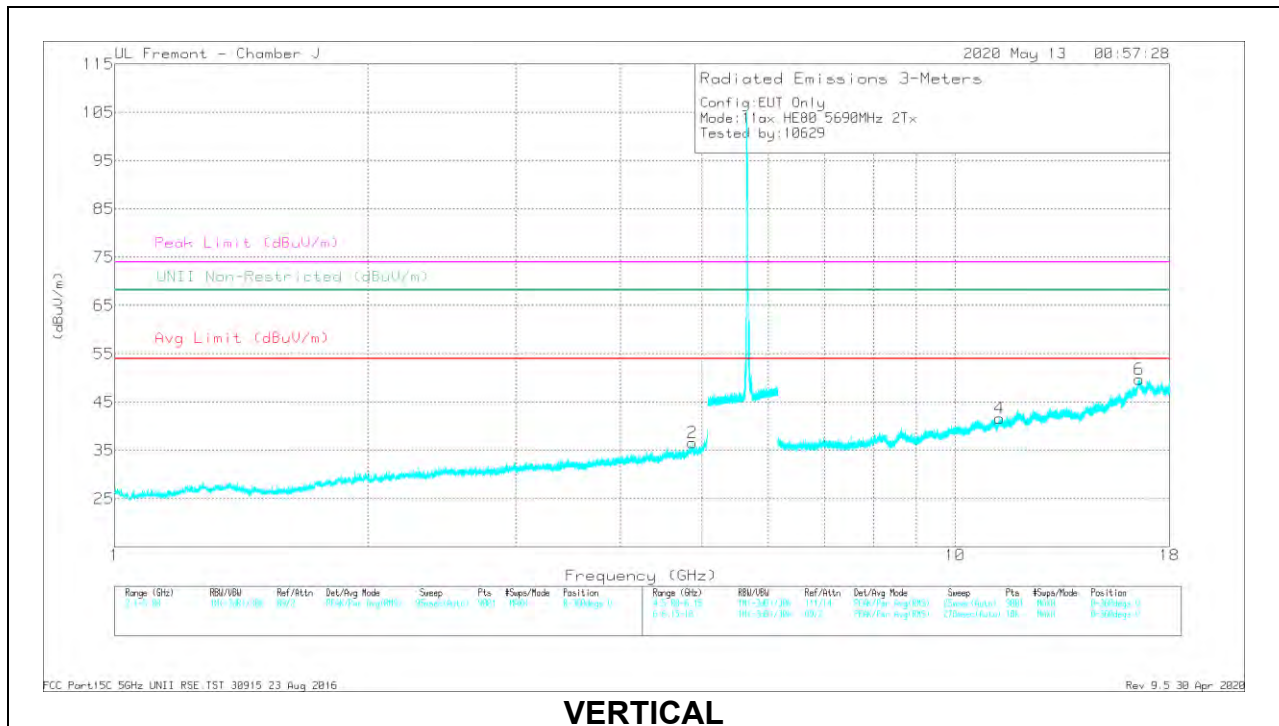

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Ftr/Psd (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.83868	39.93	PK-U	34.2	-30.5	43.63	-	-	74	-30.37	-	-	15	139	H
	* 4.83835	28.97	ADR	34.2	-30.5	32.67	54	-21.33	-	-	-	-	15	139	H
2	* 4.87272	39.33	PK-U	34.1	-29.7	43.73	-	-	74	-30.27	-	-	210	269	V
	* 4.87394	29.63	ADR	34.1	-29.7	34.03	54	-19.97	-	-	-	-	210	269	V
3	* 11.30503	34.62	PK-U	38	-23.2	49.42	-	-	74	-24.58	-	-	273	212	H
	* 11.30193	24.38	ADR	38	-23.3	39.08	54	-14.92	-	-	-	-	273	212	H
5	16.59912	31.81	PK-U	42.2	-19	55.01	-	-	-	-	68.2	-13.19	228	170	H
	* 11.30181	34.03	PK-U	38	-23.3	48.73	-	-	74	-25.27	-	-	132	119	V
4	* 11.3043	24.76	ADR	38	-23.2	39.56	54	-14.44	-	-	-	-	132	119	V
	16.58826	32.62	PK-U	42.1	-18.9	55.82	-	-	-	-	68.2	-12.38	324	181	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.1.19. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX ANT 5

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

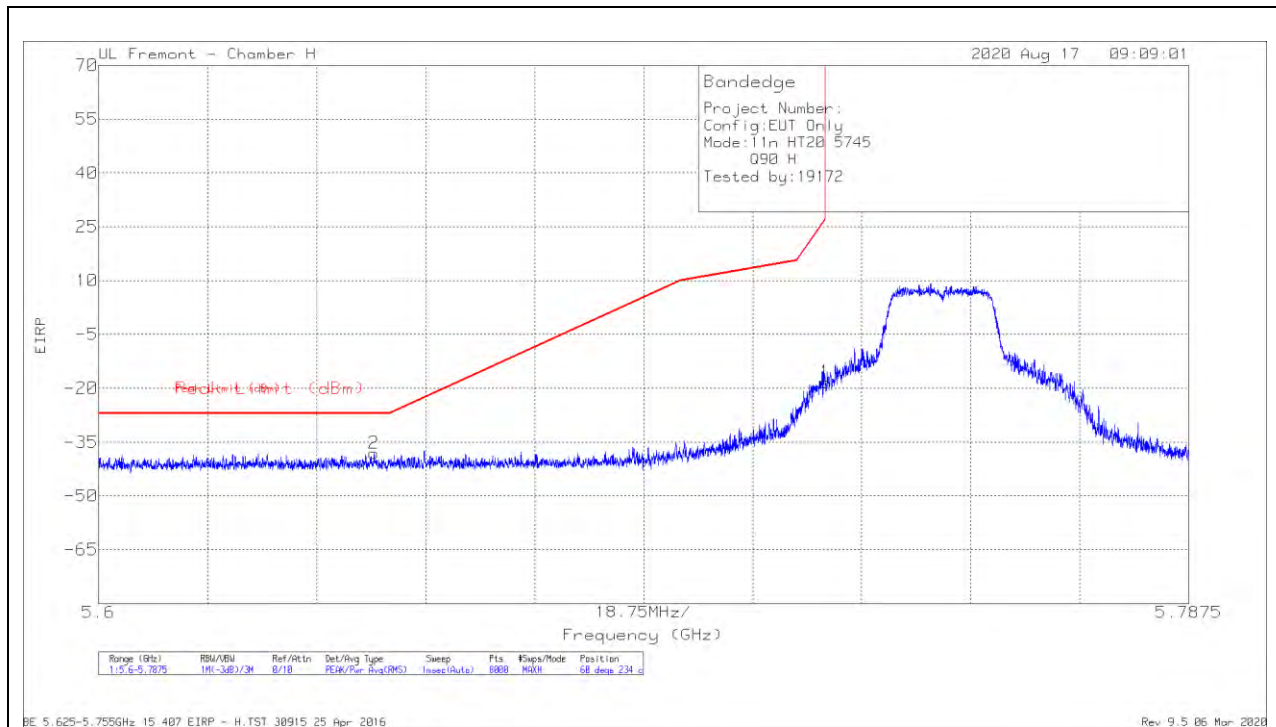

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64735	-64.03	Pk	35.1	-21	11.8	0	-38.13	-27	-11.13	60	234	H
1	5.72498	-44	Pk	35	-21.1	11.8	0	-18.3	26.96	-45.26	60	234	H

Pk - Peak detector

VERTICAL RESULT

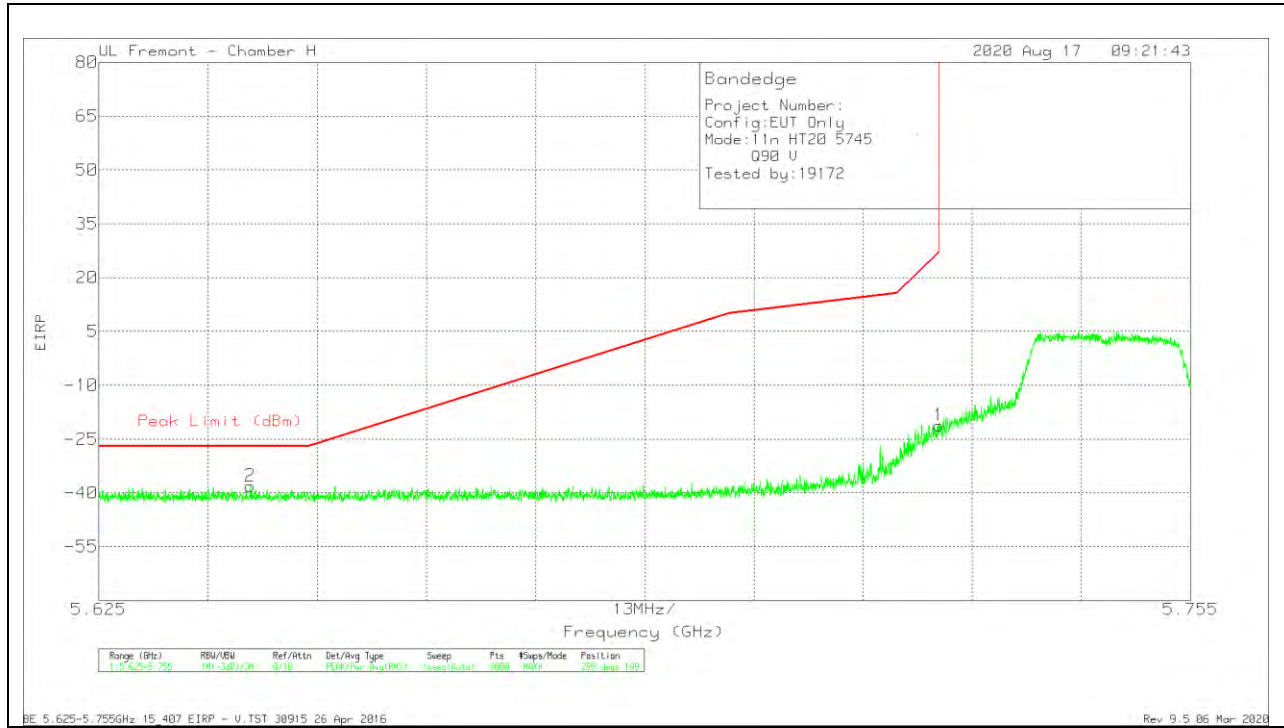


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64306	-63.98	Pk	35.2	-21.1	11.8	0	-38.08	-27	-11.08	295	199	V
1	5.725	-46.93	Pk	35	-21.1	11.8	0	-21.23	27	-48.23	295	199	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

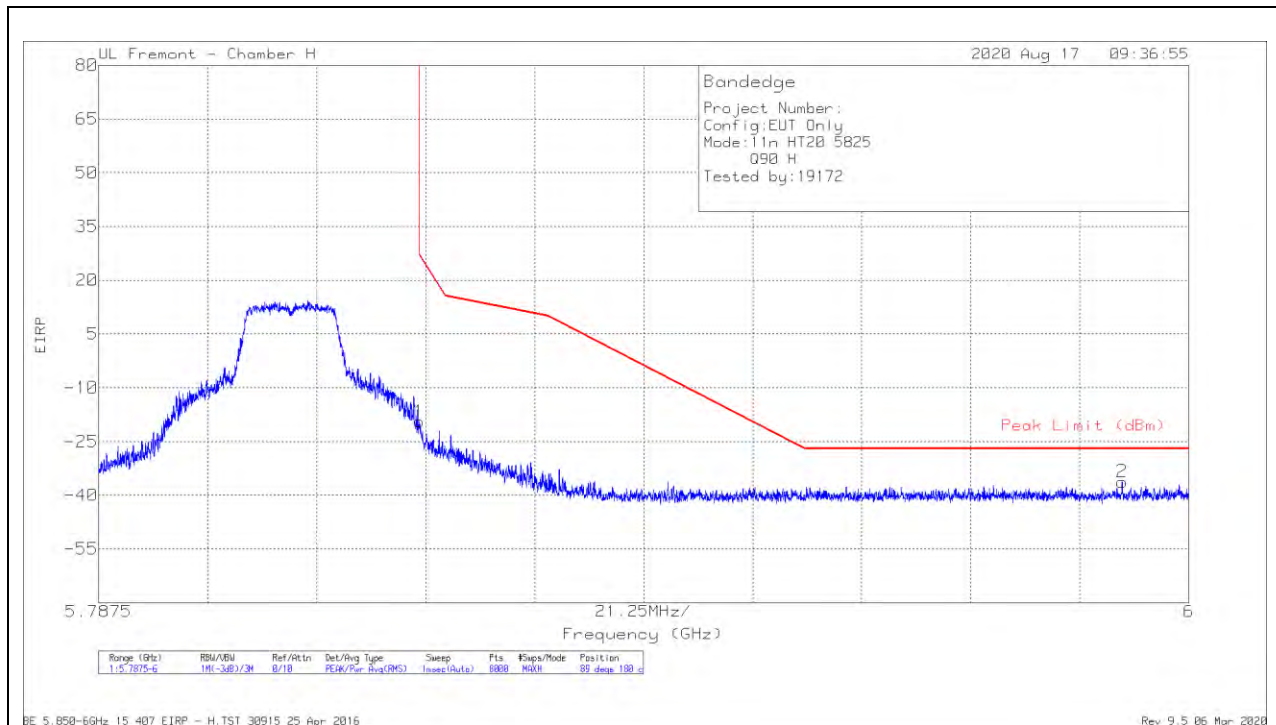

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cb/Filtr/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-45.56	Pk	35	-20.7	11.8	0	-19.46	26.98	-46.44	89	180	H
2	5.98701	-62.96	Pk	35.2	-20.3	11.8	0	-36.26	-27	-9.26	89	180	H

Pk - Peak detector

VERTICAL RESULT

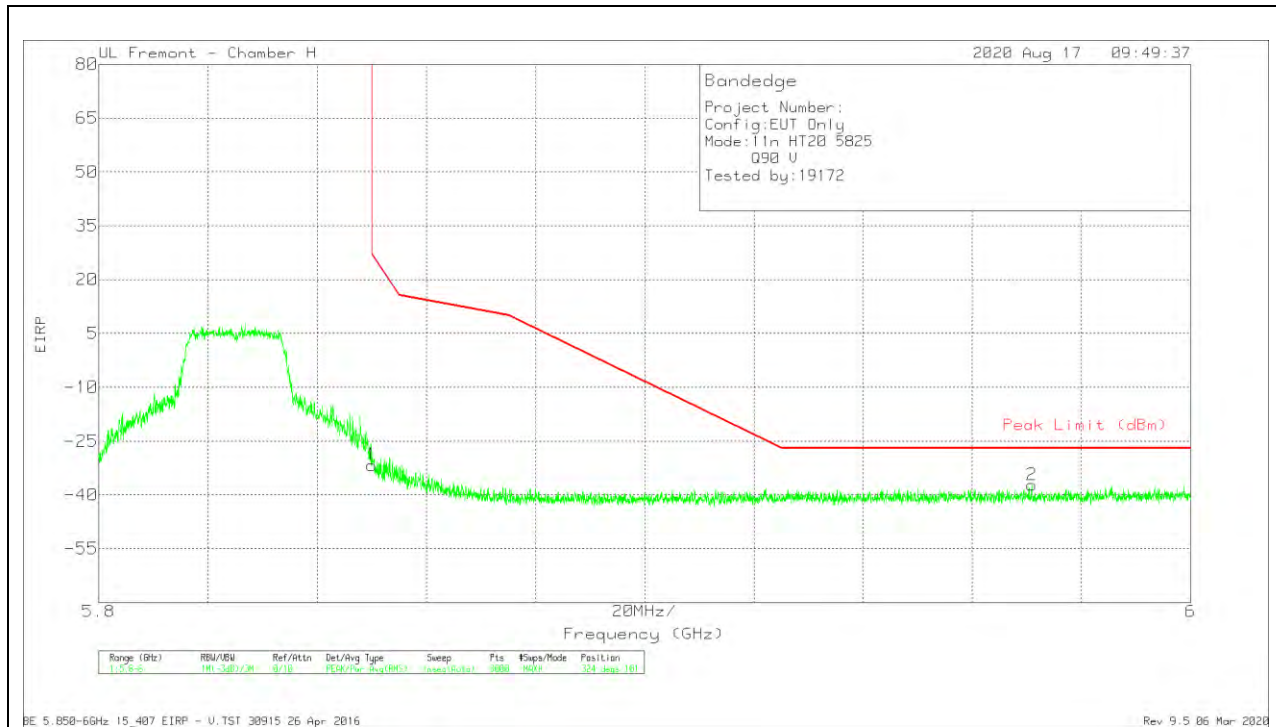


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-57.79	Pk	35	-20.7	11.8	0	-31.69	26.99	-58.68	324	101	V
2	5.9709	-63.91	Pk	35.2	-20.3	11.8	0	-37.21	-27	-10.21	324	101	V

Pk - Peak detector

1TX ANT 6

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

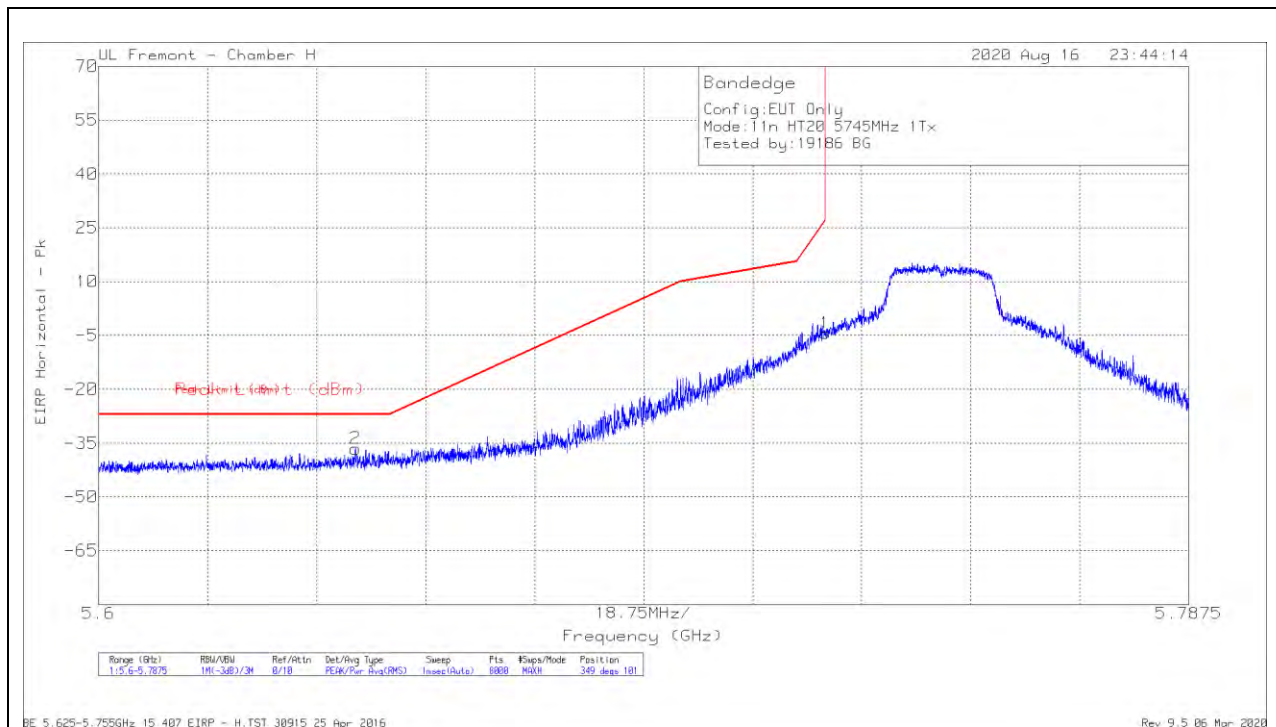

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64416	-62.46	Pk	35.2	-21.1	11.8	0	-36.56	-27	-9.56	349	101	H
1	5.72498	-30.13	Pk	35	-21.1	11.8	0	-4.43	26.96	-31.39	349	101	H

Pk - Peak detector