



HARMONICS AND SPURIOUS EMISSIONS

242 Tones, RU Index 61 RESULTS

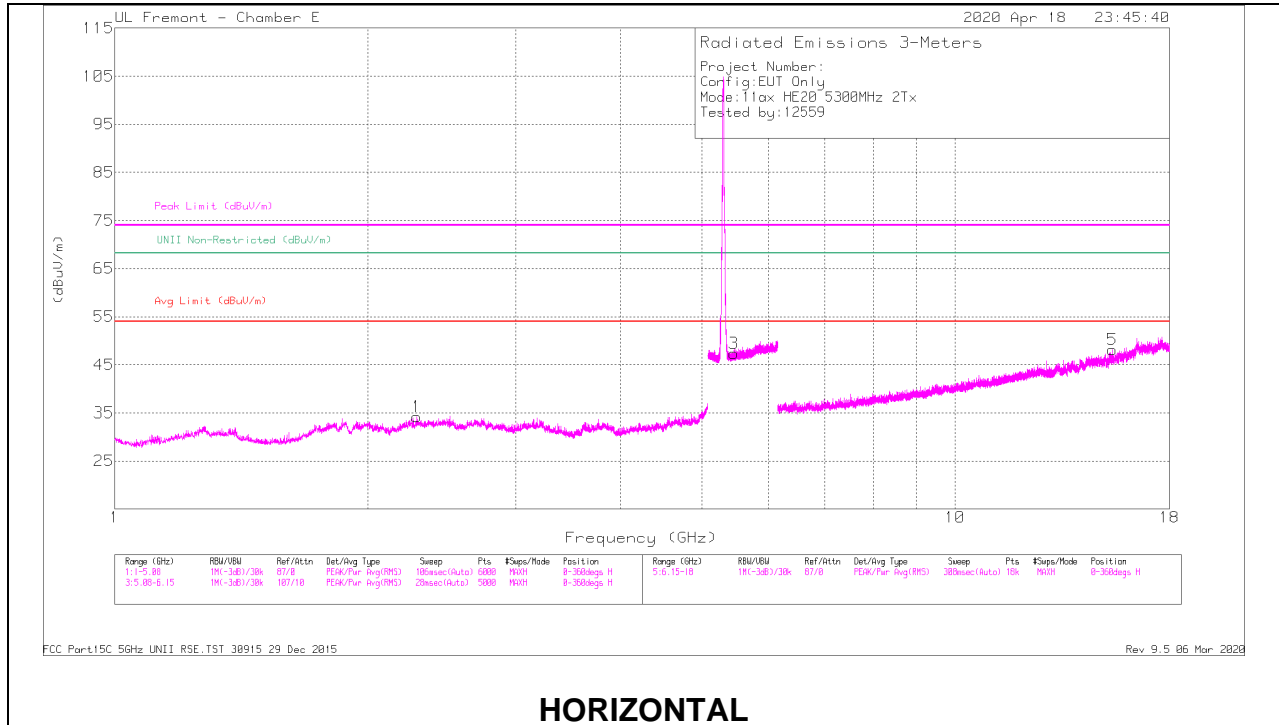

HORIZONTAL

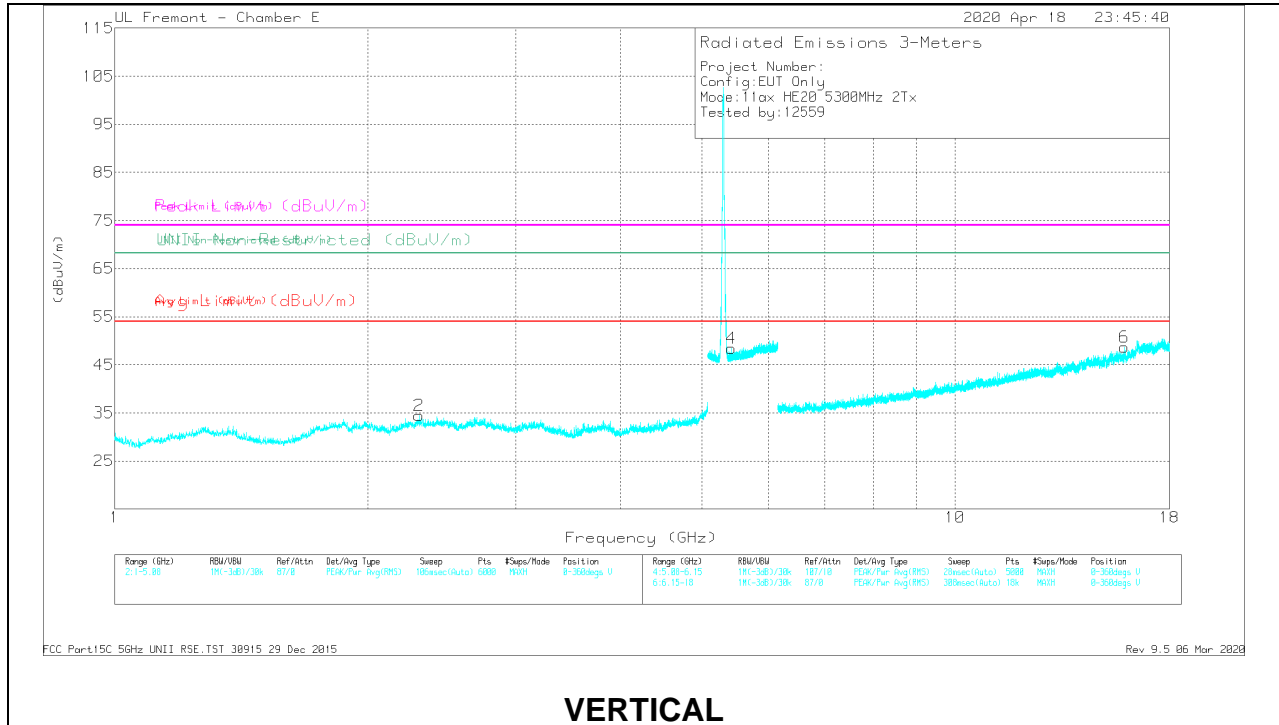

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbw/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.28878	45.25	PK-U	31.9	-35.5	41.65	-	-	74	-32.35	-	-	128	263	H
	* 2.29136	32.9	ADR	31.9	-35.5	29.3	54	-24.7	-	-	-	-	128	263	H
2	* 2.29972	44.94	PK-U	32	-35.4	41.54	-	-	74	-32.46	-	-	167	252	V
	* 2.24141	33.39	ADR	31.7	-35.5	29.59	54	-24.41	-	-	-	-	167	252	V
3	* 5.45491	42.65	PK-U	34.6	-21.7	55.55	-	-	74	-18.45	-	-	133	257	H
	* 5.45472	30.97	ADR	34.6	-21.7	43.87	54	-10.13	-	-	-	-	133	257	H
4	* 5.42048	42.54	PK-U	34.5	-21.8	55.24	-	-	74	-18.76	-	-	261	373	V
	* 5.42101	31.58	ADR	34.5	-21.8	44.28	54	-9.72	-	-	-	-	261	373	V
5	* 15.38933	35.2	PK-U	40.2	-20.9	54.5	-	-	74	-19.5	-	-	130	259	H
	* 15.38279	23.9	ADR	40.2	-20.9	43.2	54	-10.8	-	-	-	-	130	259	H
6	* 15.90074	34.86	PK-U	40.3	-20.3	54.86	-	-	74	-19.14	-	-	312	103	V
	* 15.90295	23.76	ADR	40.3	-20.3	43.76	54	-10.24	-	-	-	-	312	103	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

FCC Part15C 5GHz UNII RSE.TST 30915 29 Dec 2015
 Rev 9.5 06 Mar 2020

2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

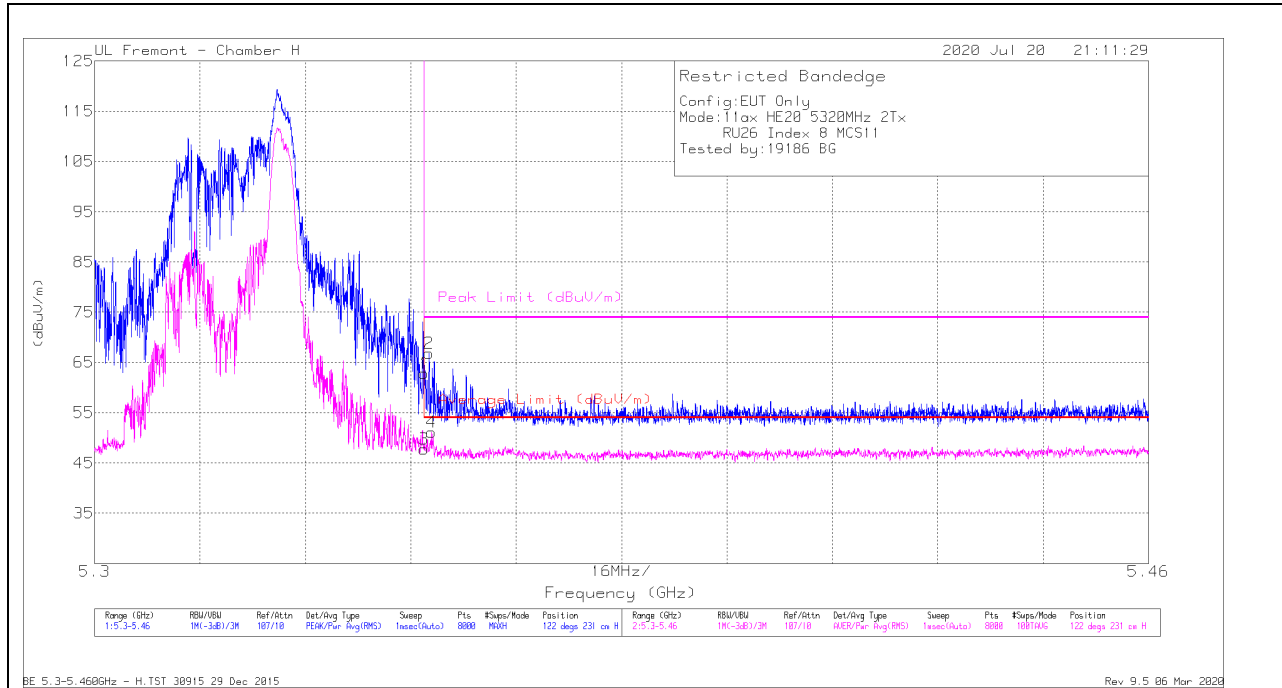

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1863 (dBm)	Amp/Cal/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	48.87	Pk	34.9	-20.9	28.87	-	-	74	-11.13	122	231	H
2	* 5.35077	52.87	Pk	34.9	-20.9	31.87	-	-	74	-7.13	122	231	H
3	* 5.35001	33.73	RMS	34.9	-20.9	12.83	54	-6.27	-	-	122	231	H
4	* 5.35117	37.09	RMS	34.9	-20.9	16.09	54	-2.91	-	-	122	231	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

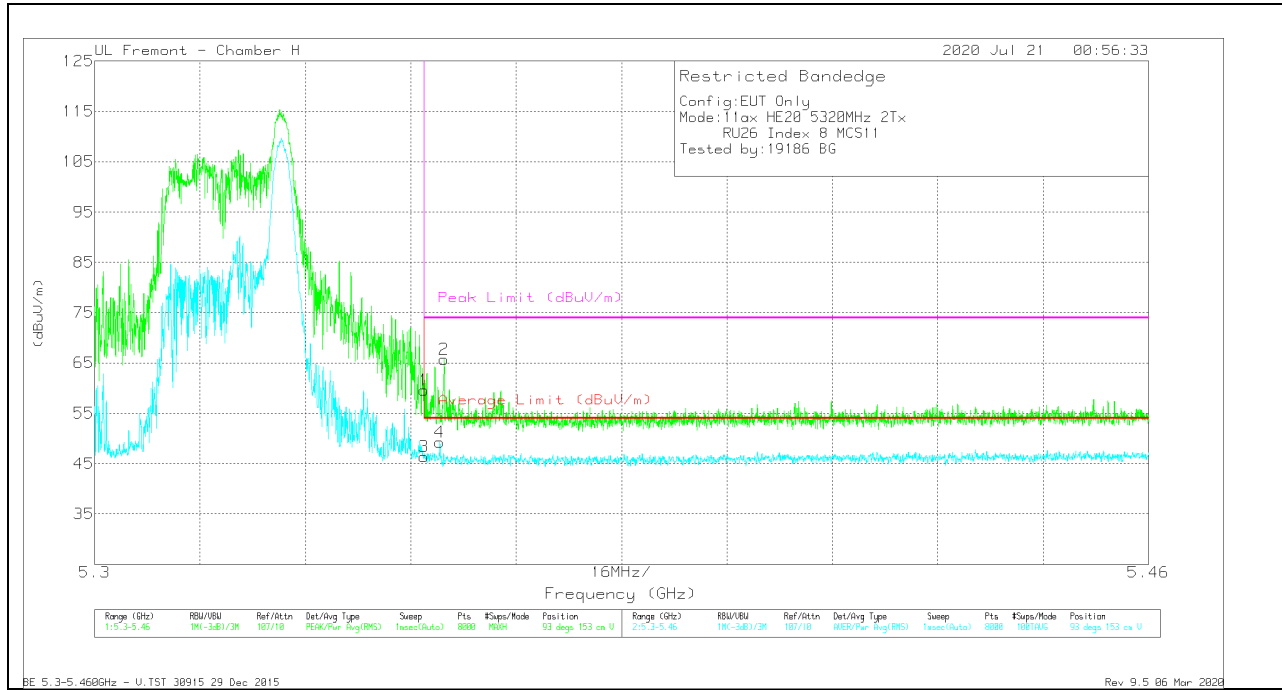


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1063 (dB/m)	Amp/CN/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	45.58	Pk	34.9	-20.9	59.58	-	-	74	-14.42	93	153	V
2	* 5.35305	51.8	Pk	34.9	-21	65.7	-	-	74	-8.3	93	153	V
3	* 5.35001	32.34	RMS	34.9	-20.9	46.34	54	-7.55	-	-	93	153	V
4	* 5.35241	35.26	RMS	34.9	-21	49.16	54	-4.84	-	-	93	153	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

26 Tones, RU Index 8 RESULTS

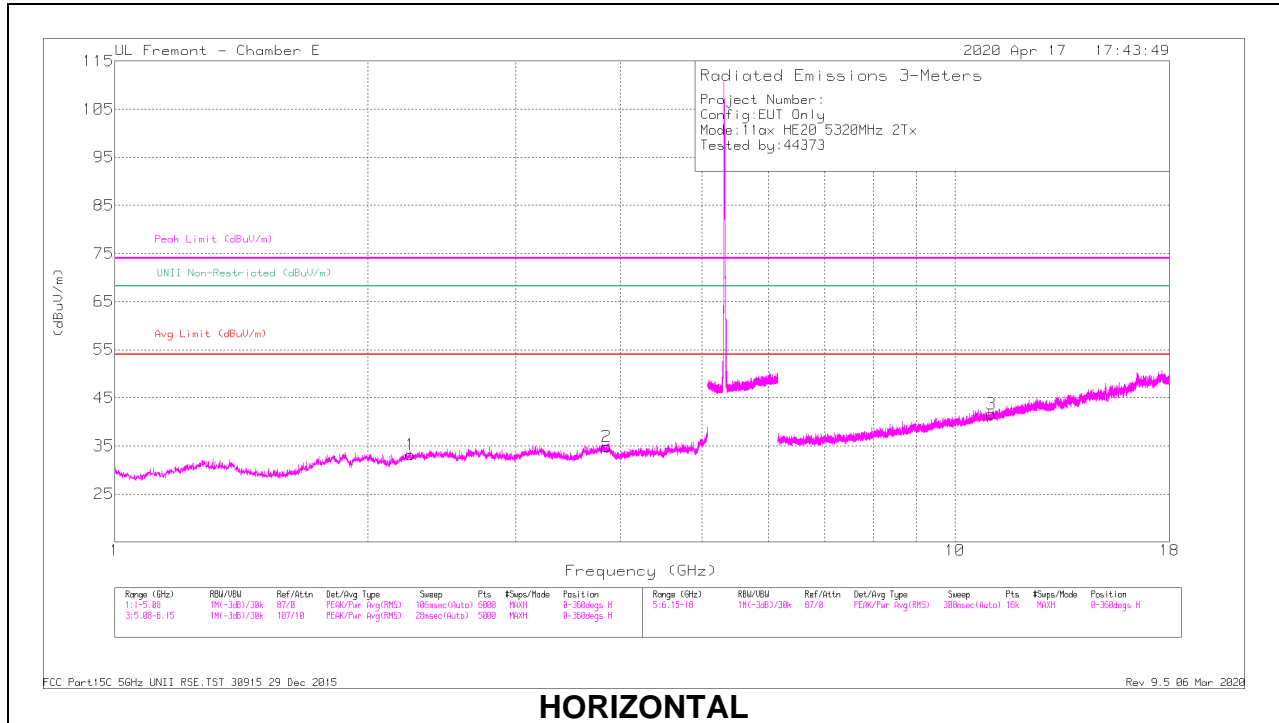

HORIZONTAL

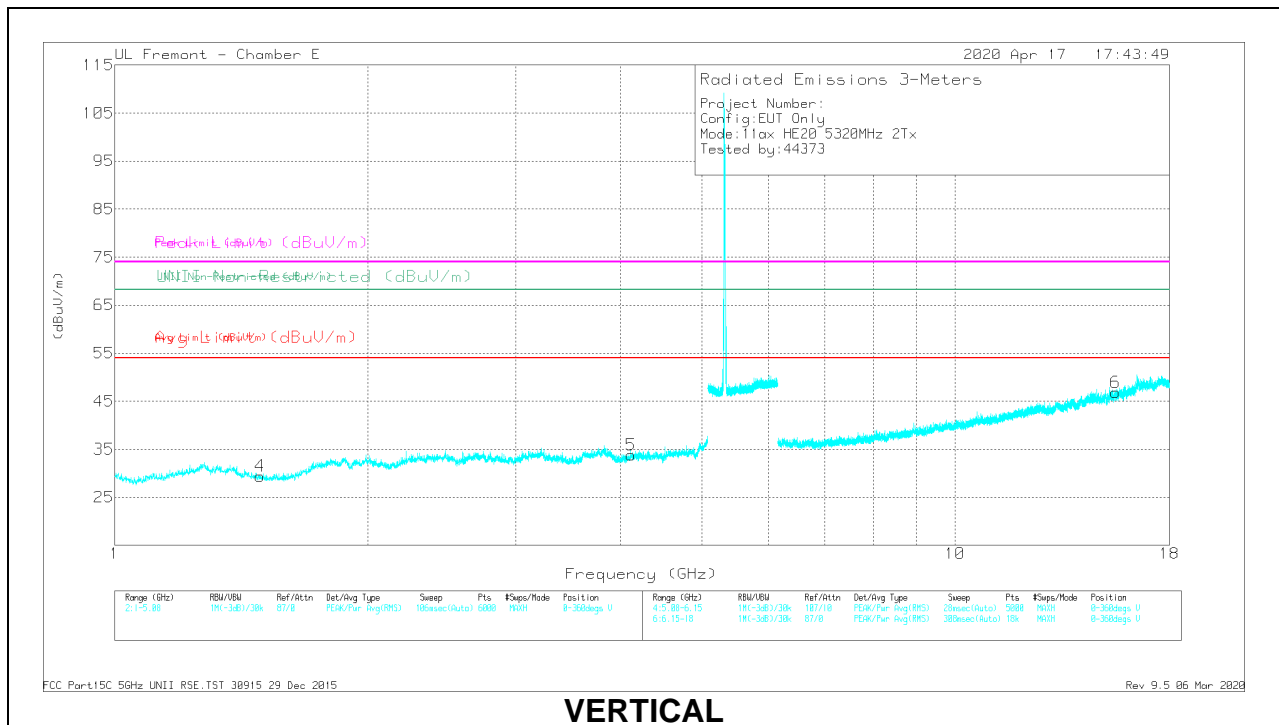

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.251	44.57	PK-U	31.8	-35.6	40.77	-	-	74	-33.23	-	-	0	200	H
	2.25074	33.2	ADR	31.8	-35.6	29.4	54	-24.6	-	-	-	-	0	200	H
2	* 3.85199	41.38	PK-U	33.6	-33	41.88	-	-	74	-32.02	-	-	0	101	H
	3.85394	30.11	ADR	33.6	-33	30.71	54	-23.29	-	-	-	-	0	101	H
4	* 1.48743	45.01	PK-U	28.3	-35.8	37.51	-	-	74	-36.49	-	-	0	101	V
	1.48757	33.34	ADR	28.3	-35.8	25.84	54	-28.16	-	-	-	-	0	101	V
5	* 4.11737	40.49	PK-U	33.7	-32.4	41.79	-	-	74	-32.21	-	-	0	101	V
	4.11806	29.19	ADR	33.6	-32.4	30.39	54	-23.61	-	-	-	-	0	101	V
3	* 11.04805	36.04	PK-U	37.6	-25.4	48.24	-	-	74	-25.76	-	-	0	200	H
	11.04764	25.26	ADR	37.7	-25.4	37.56	54	-16.44	-	-	-	-	0	200	H
6	* 15.53092	34.76	PK-U	40.3	-21.4	53.66	-	-	74	-20.34	-	-	0	200	V
	15.52923	23.96	ADR	40.3	-21.4	42.86	54	-11.14	-	-	-	-	0	200	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.1.11. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.3 GHz BAND

1TX Antenna 5 MODE – 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

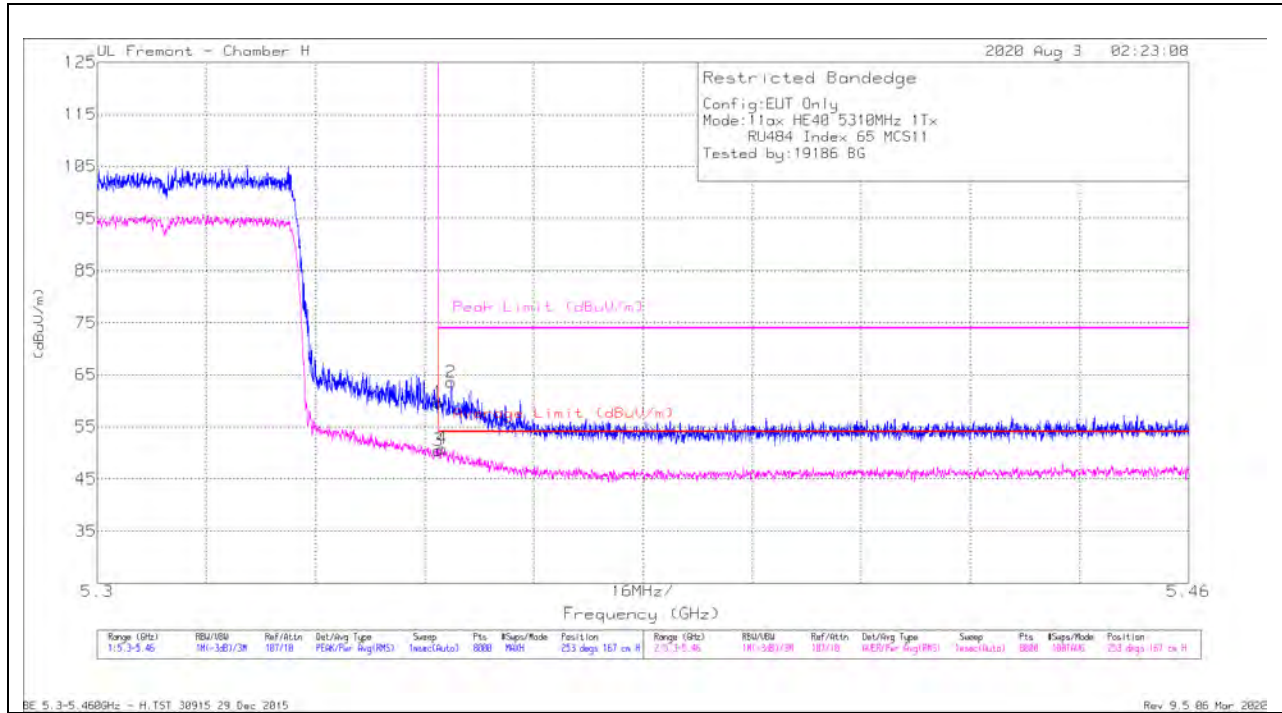

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	45.77	Pk	34.9	-20.9	59.77	-	-	74	-14.23	253	167	H
3	* 5.35001	36.47	RMS	34.9	-20.9	50.47	54	-3.53	-	-	253	167	H
4	* 5.35053	36.87	RMS	34.9	-20.9	50.87	54	-3.13	-	-	253	167	H
2	* 5.35191	49.67	Pk	34.9	-21	63.57	-	-	74	-10.43	253	167	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

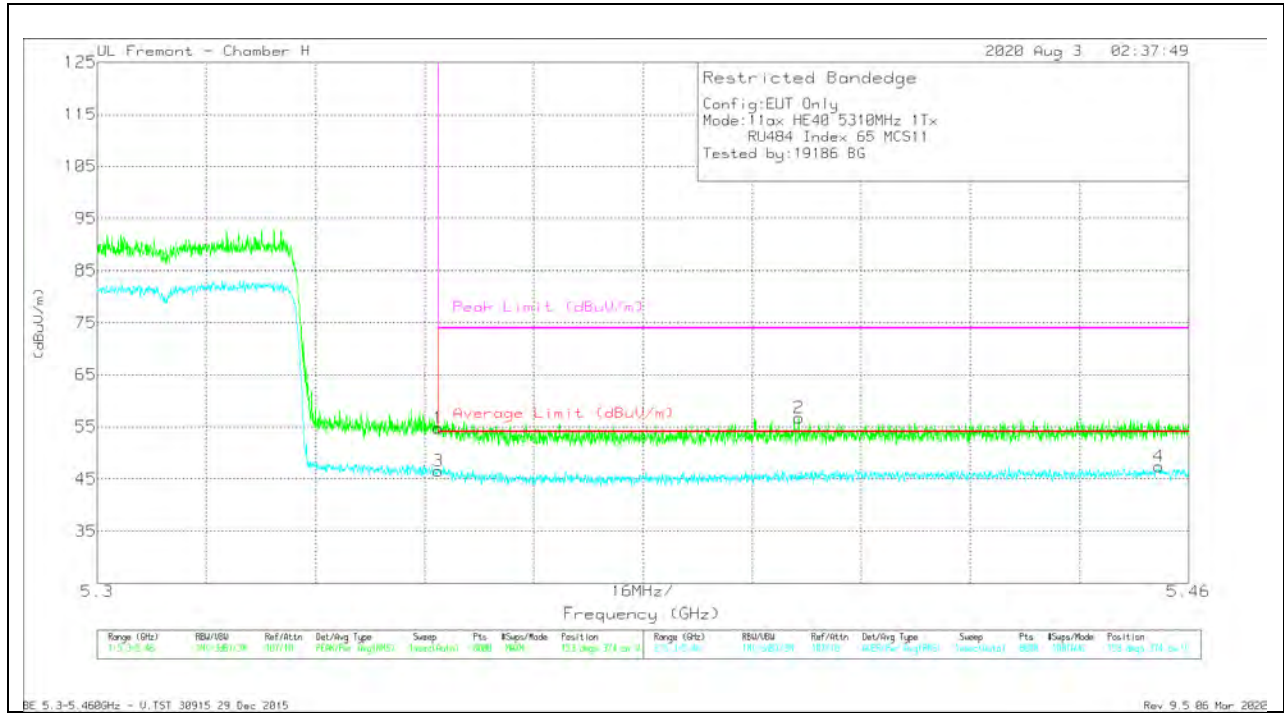

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CbI/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	40.77	Pk	34.9	-20.9	54.77	-	-	74	-19.23	153	374	V
2	* 5.40282	42.55	Pk	35	-20.8	56.75	-	-	74	-17.25	153	374	V
3	* 5.35001	32.48	RMS	34.9	-20.9	46.48	54	-7.52	-	-	153	374	V
4	* 5.45562	33.02	RMS	35.3	-20.9	47.42	54	-6.58	-	-	153	374	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1.1.12. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.3 GHz BAND

1TX Antenna 5 MODE – 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

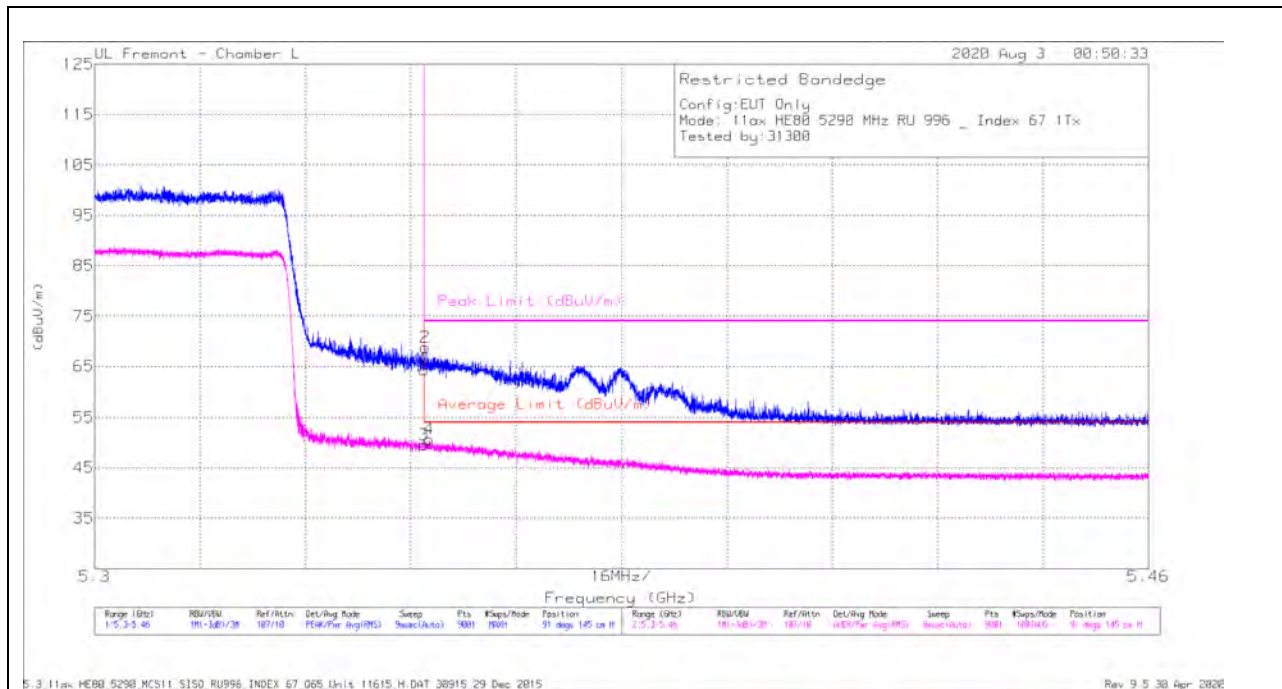

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/ChlFilt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.35001	46.98	Pk	34.5	-17.1	0	64.38	-	-	74	-9.62	91	145	H
2	*5.35017	51.34	Pk	34.5	-17.1	0	68.74	-	-	74	-5.26	91	145	H
3	*5.35001	31.97	RMS	34.5	-17.1	0	49.37	54	-4.63	-	-	91	145	H
4	*5.35078	33.07	RMS	34.5	-17.1	0	50.47	54	-3.53	-	-	91	145	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

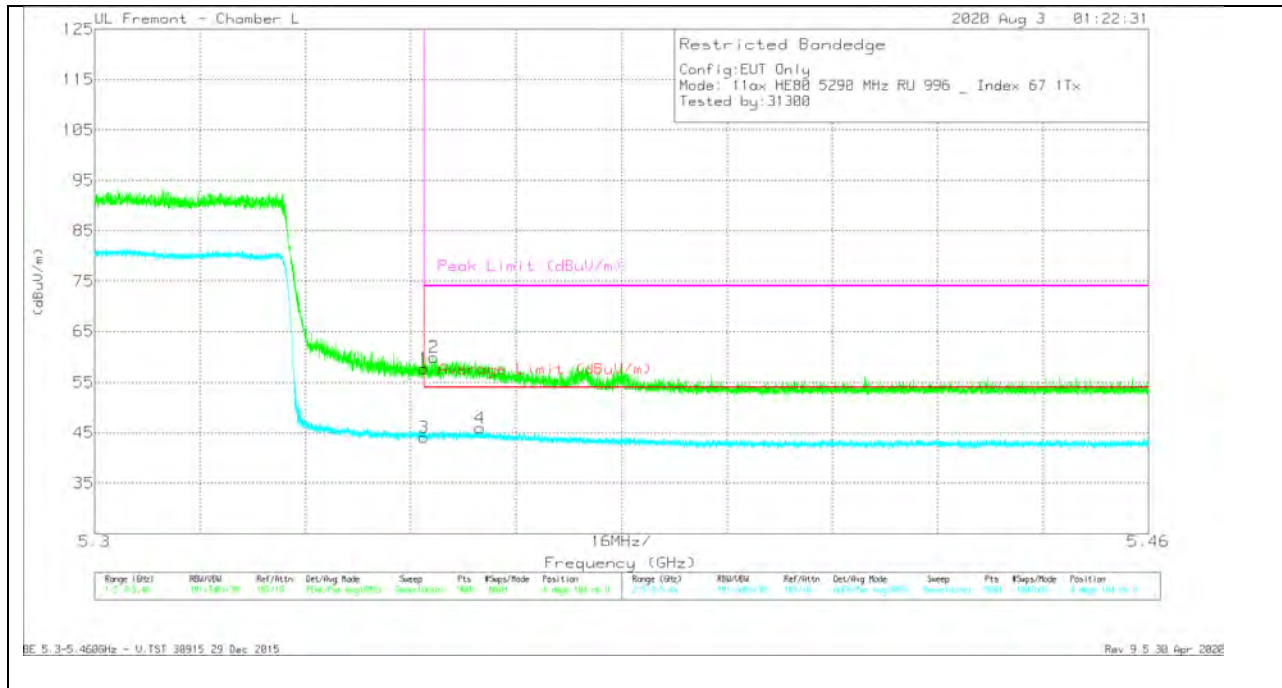


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbf/Tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	40.31	PK	34.5	-17.1	0	57.71	-	-	74	-16.29	4	104	V
2	* 5.35156	42.67	PK	34.5	-17.1	0	59.97	-	-	74	-14.03	4	104	V
3	* 5.35001	26.47	RMS	34.5	-17.1	0	43.87	54	-10.13	-	-	4	104	V
4	* 5.35851	28.32	RMS	34.5	-17.1	0	45.72	54	-8.28	-	-	4	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

1TX Antenna 5 MODE – 26 Tones, RU Index 36

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

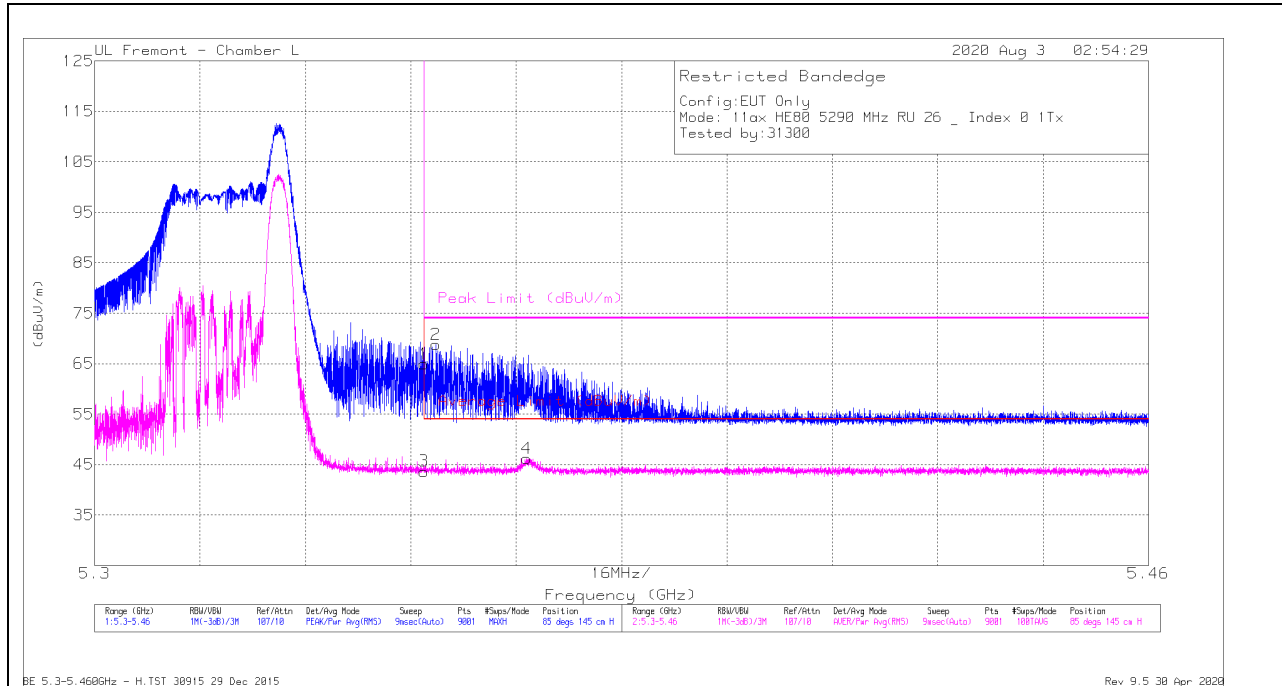

Marker	Frequency (GHz)	Meter Reading (dBu)	Det	AF 344 (dBm)	Ampl/ChlFtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	47.56	Pk	34.5	-17.1	0	64.96	-	-	74	-9.04	85	145	H
2	* 5.35184	51.38	Pk	34.5	-17.1	0	68.78	-	-	74	-5.22	85	145	H
3	* 5.35001	26.08	RMS	34.5	-17.1	0	43.48	54	-10.52	-	-	85	145	H
4	* 5.36562	28.53	RMS	34.5	-17	0	46.03	54	-7.97	-	-	85	145	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

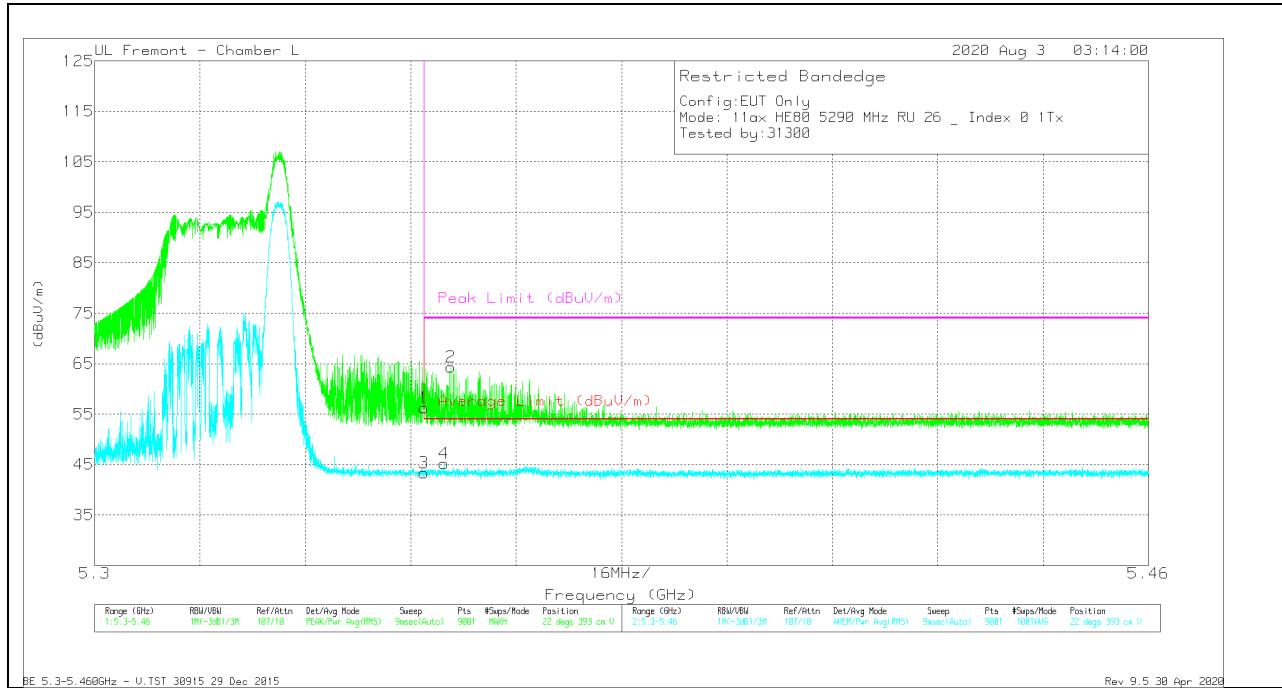


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/CbM/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	38.81	PK	34.5	-17.1	0	56.21	-	-	74	-17.79	22	393	V
2	* 5.35405	46.81	PK	34.5	-17.1	0	64.31	-	-	74	-9.69	22	393	V
3	* 5.35001	25.75	RMS	34.5	-17.1	0	43.15	54	-10.85	-	-	22	393	V
4	* 5.35305	27.67	RMS	34.5	-17.1	0	45.07	54	-8.93	-	-	22	393	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

1TX Antenna 6 MODE – MCS 11, 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

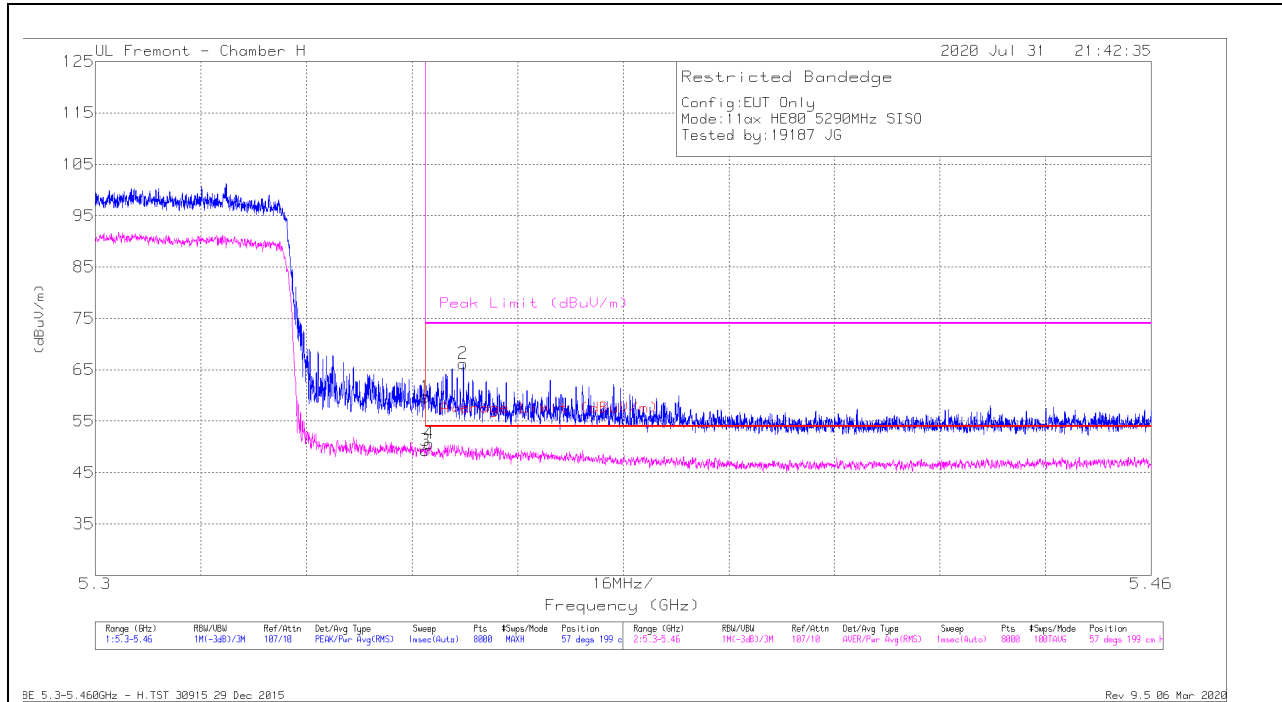

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dB/m)	Amp/Cbl/Ftr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	45.78	Pk	34.9	-20.9	59.78	-	-	74	-14.22	57	199	H
2	* 5.35575	52.22	Pk	34.9	-20.9	66.22	-	-	74	-7.78	57	199	H
3	* 5.35001	35.33	RMS	34.9	-20.9	49.33	54	-4.67	-	-	57	199	H
4	* 5.35061	36.66	RMS	34.9	-20.9	50.66	54	-3.34	-	-	57	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

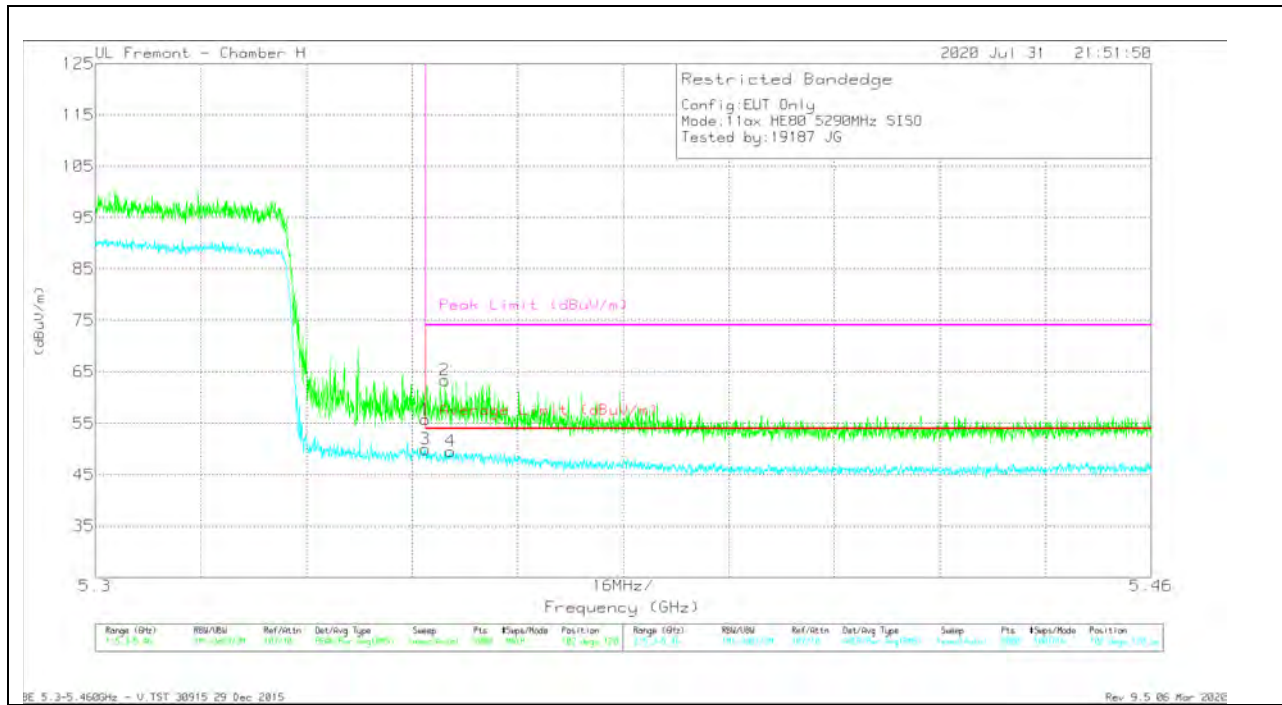

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Fltr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	41.76	Pk	34.9	-20.9	55.76	-	-	74	-18.24	102	120	V
2	* 5.35299	49.44	Pk	34.9	-21	63.34	-	-	74	-10.66	102	120	V
3	* 5.35001	36	RMS	34.9	-20.9	50	54	-4	-	-	102	120	V
4	* 5.35385	35.7	RMS	34.9	-21	49.6	54	-4.4	-	-	102	120	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX Antenna 6 MODE – MCS 11, 26 Tones, RU Index 36

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

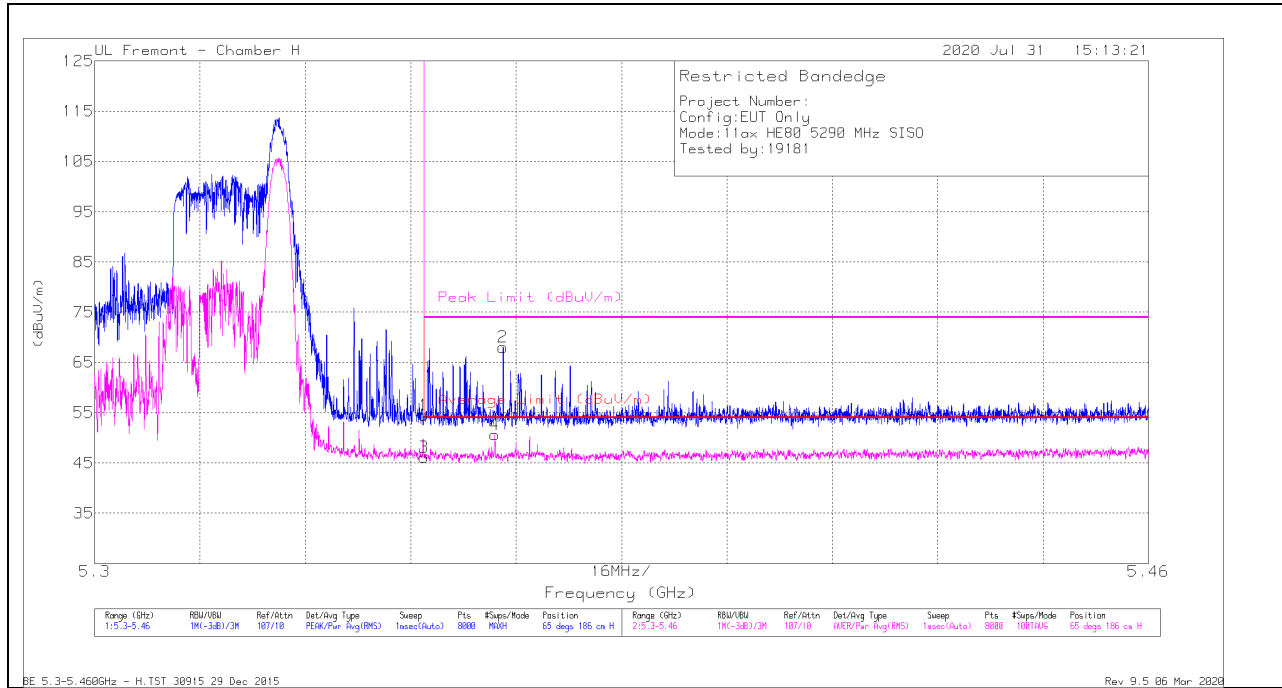

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Paid (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	40.45	Pk	34.9	-20.9	54.45	-	-	74	-19.55	65	186	H
2	* 5.36201	54.12	Pk	34.9	-21	68.02	-	-	74	-5.98	65	186	H
3	* 5.35001	32.16	RMS	34.9	-20.9	46.16	54	-7.84	-	-	65	186	H
4	* 5.36075	36.79	RMS	34.9	-21	50.69	54	-3.31	-	-	65	186	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

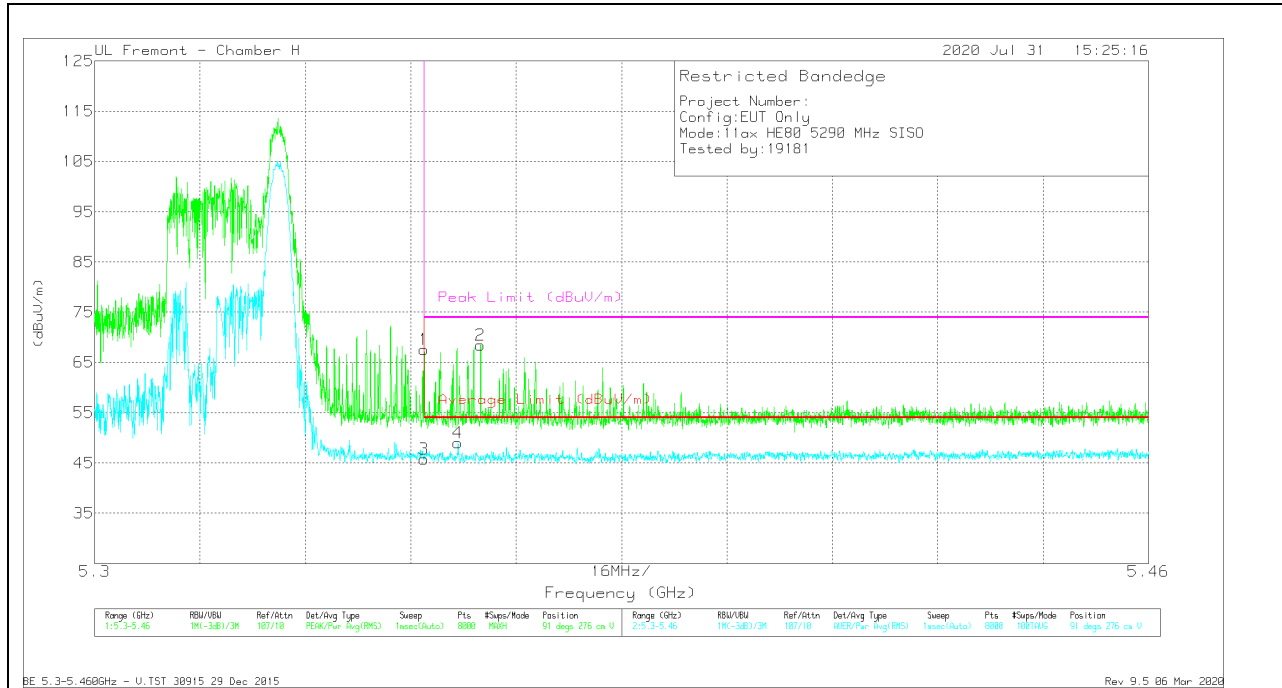


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	53.6	Pk	34.9	-20.9	67.6	-	-	74	-6.4	91	276	V
2	* 5.35859	54.47	Pk	34.9	-20.9	68.47	-	-	74	-5.53	91	276	V
3	* 5.35001	31.73	RMS	34.9	-20.9	45.73	54	-8.27	-	-	91	276	V
4	* 5.35517	34.99	RMS	34.9	-20.9	48.99	54	-5.01	-	-	91	276	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 5 + Antenna 6 OFDMA MODE – MCS 11, 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

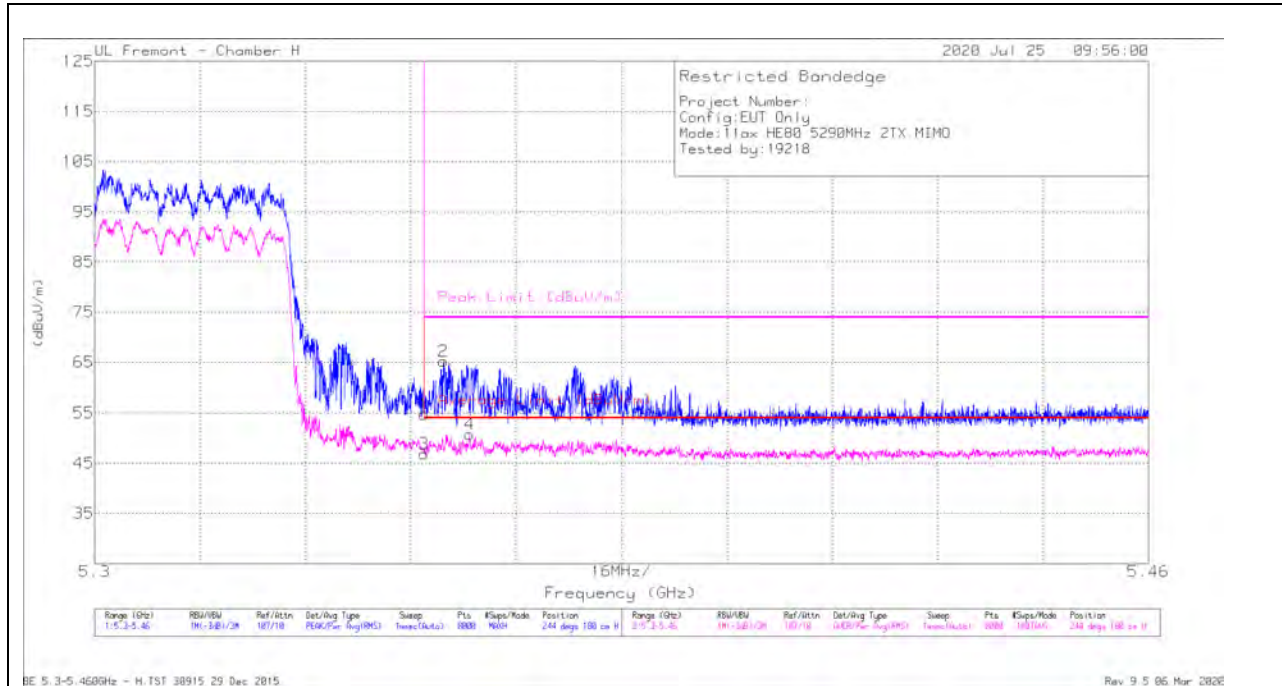

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 1863 (dBm)	Amp/Cal/Ftr/Psd (dB)	DC Corr (dB)	Corrected Reading (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	40.73	Pk	34.9	-20.9	0	54.73	-	-	74	-19.27	244	180	H
2	* 5.35299	51.27	Pk	34.9	-21	0	65.17	-	-	74	-8.83	244	180	H
3	* 5.35001	32.42	RMS	34.9	-20.9	0	46.42	54	-7.58	-	-	244	180	H
4	* 5.35693	36.29	RMS	34.9	-20.9	0	50.29	54	-3.71	-	-	244	180	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

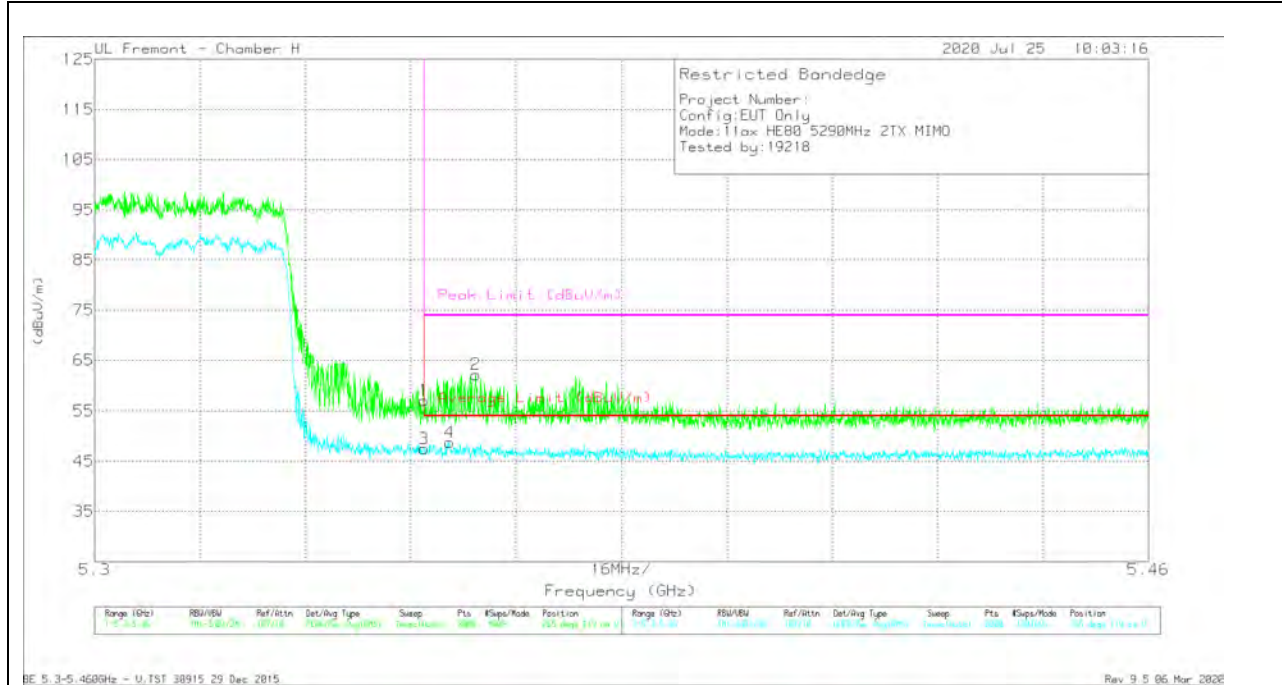


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Ch/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.35001	43.11	Pk	34.9	-20.9	0	57.11	-	-	74	-16.89	265	119	V
2	*5.35787	48.22	Pk	34.9	-20.9	0	62.22	-	-	74	-11.78	265	119	V
3	*5.35001	33.1	RMS	34.9	-20.9	0	47.1	54	-6.9	-	-	265	119	V
4	*5.35389	34.37	RMS	34.9	-21	0	48.27	54	-5.73	-	-	265	119	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

996 Tnes, RU Index 67 RESULTS

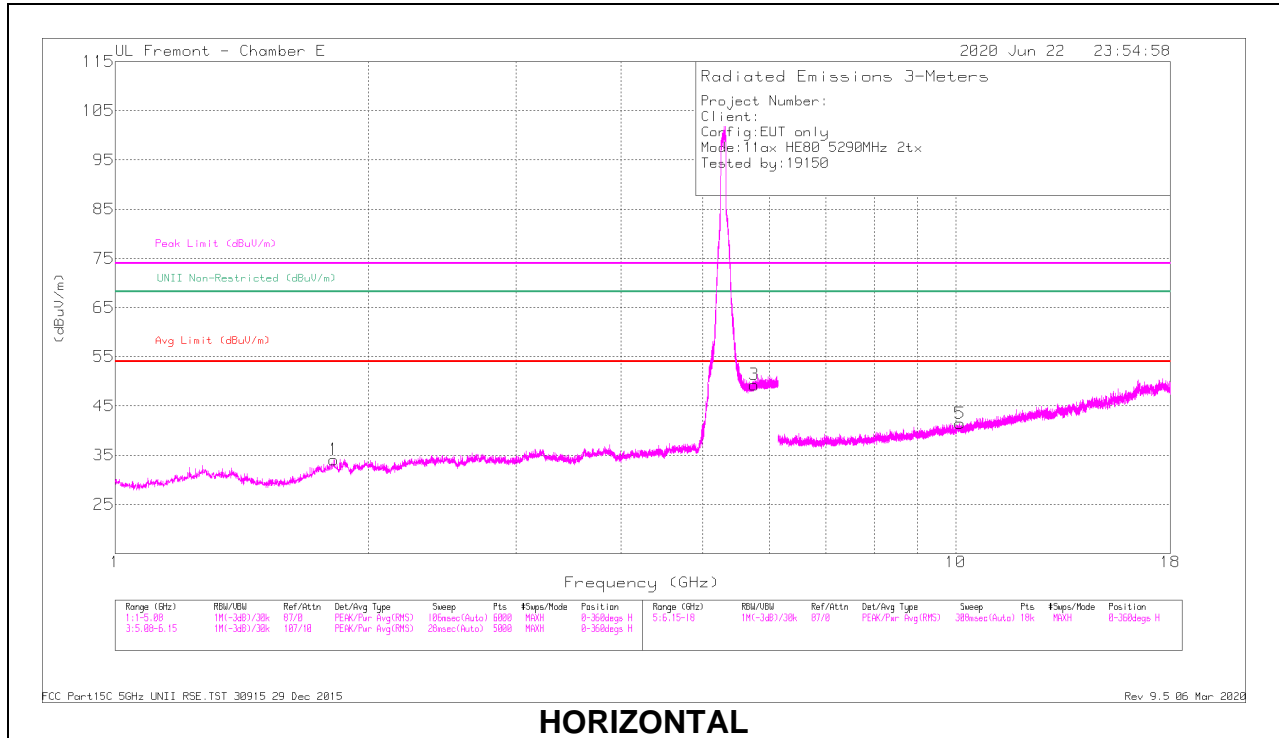

HORIZONTAL

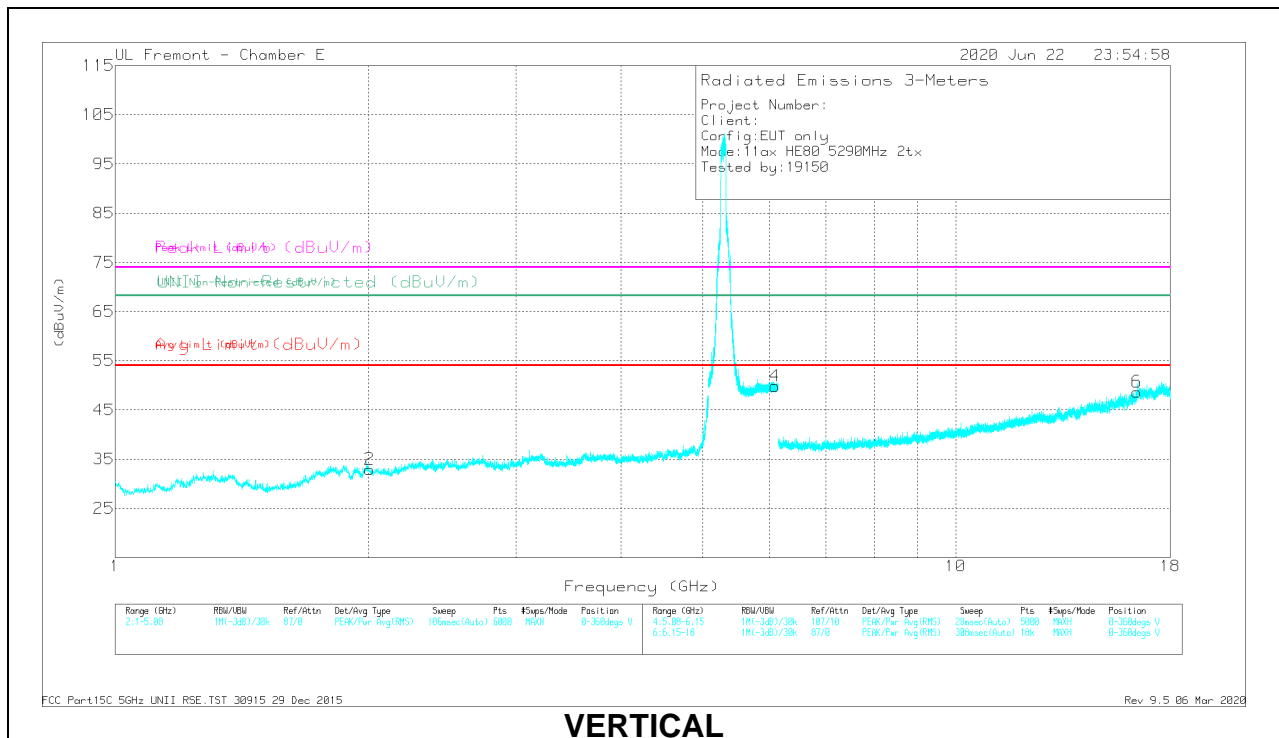

VERTICAL

RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T12 (dB/m)	Amp/Cbl/Filr/Pad (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degree)	Height (cm)	Polarity
1	1.81943	45.25	PK-U	30.8	-35	41.05	68.2	-27.15	0	101	H
2	2.00813	44.87	PK-U	31.8	-35.9	40.77	68.2	-27.43	0	101	V
3	5.75776	43.71	PK-U	34.9	-21	57.61	68.2	-10.59	0	101	H
4	6.09151	42.54	PK-U	35.4	-20.6	57.34	68.2	-10.86	0	101	V
5	10.11845	37.42	PK-U	37	-28.2	48.22	68.2	-19.98	0	101	H
6	16.42174	34.59	PK-U	41.2	-20.1	55.69	68.2	-12.51	0	101	V


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 5 + Antenna 6 OFDMA MODE – MCS 11, 26 Tones, RU Index 36

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

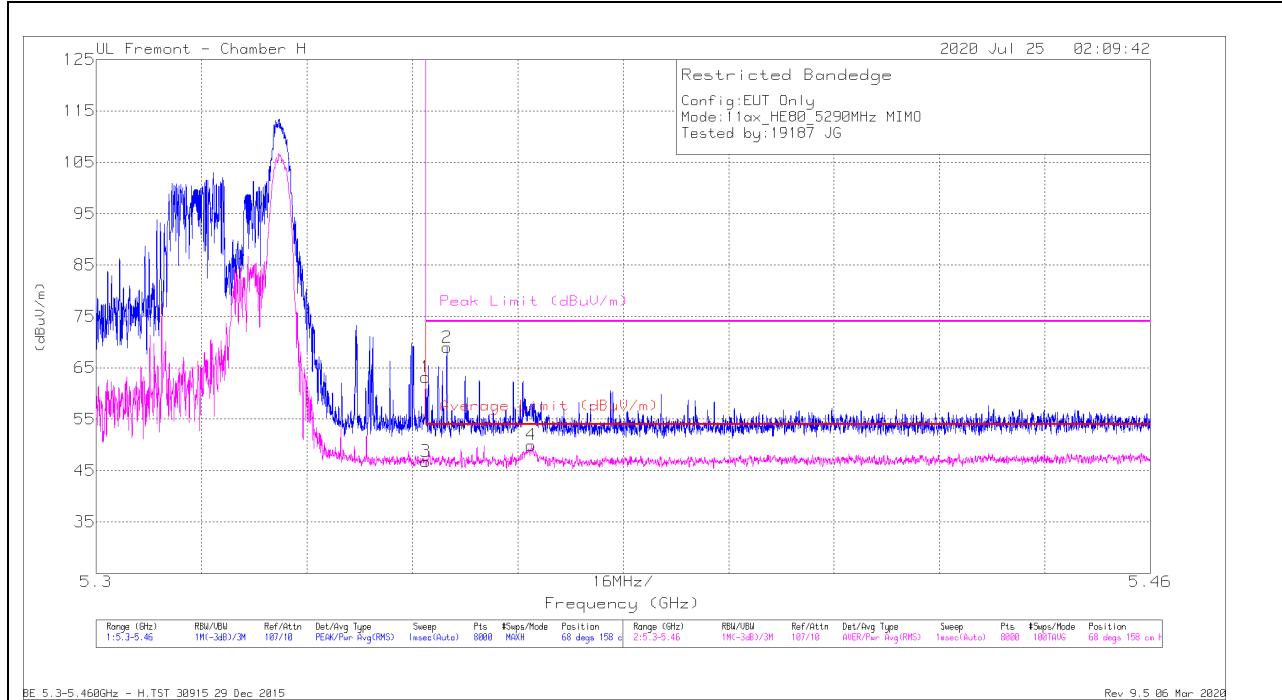

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF TSK3 (dBm)	Amp/Chn/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	49.2	Pk	34.9	-20.9	0	63.2	-	-	74	-10.8	68	158	H
2	* 5.35323	55.09	Pk	34.9	-21	0	68.99	-	-	74	-5.01	68	158	H
3	* 5.35001	32.31	RMS	34.9	-20.9	0	46.31	54	-7.69	-	-	68	158	H
4	* 5.36603	35.4	RMS	35	-20.9	0	49.5	54	-4.5	-	-	68	158	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

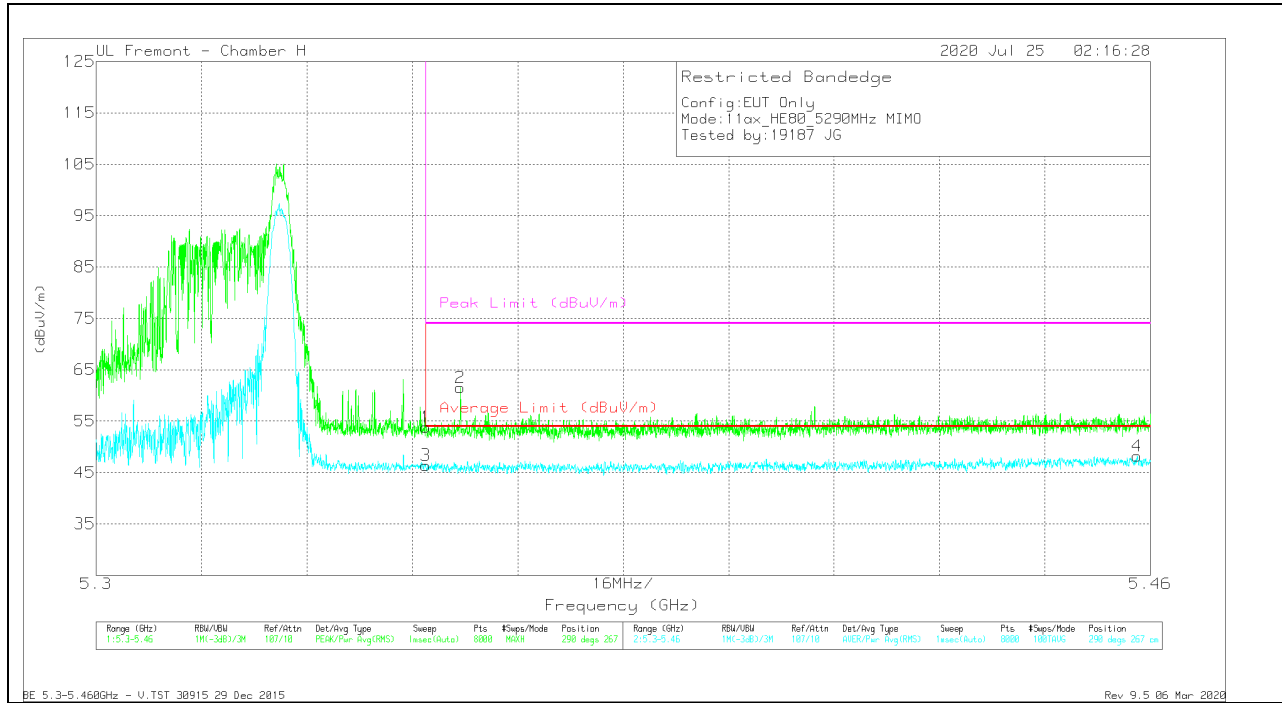


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CBI/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	39.82	PK	34.9	-20.9	0	53.82	-	-	74	-20.18	290	267	V
2	* 5.35527	47.52	PK	34.9	-20.9	0	61.52	-	-	74	-12.48	290	267	V
3	* 5.35001	31.92	RMS	34.9	-20.9	0	45.92	54	-8.08	-	-	290	267	V
4	* 5.45802	33.32	RMS	35.3	-20.9	0	47.72	54	-6.28	-	-	290	267	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

26 Tones, RU Index 36 RESULTS

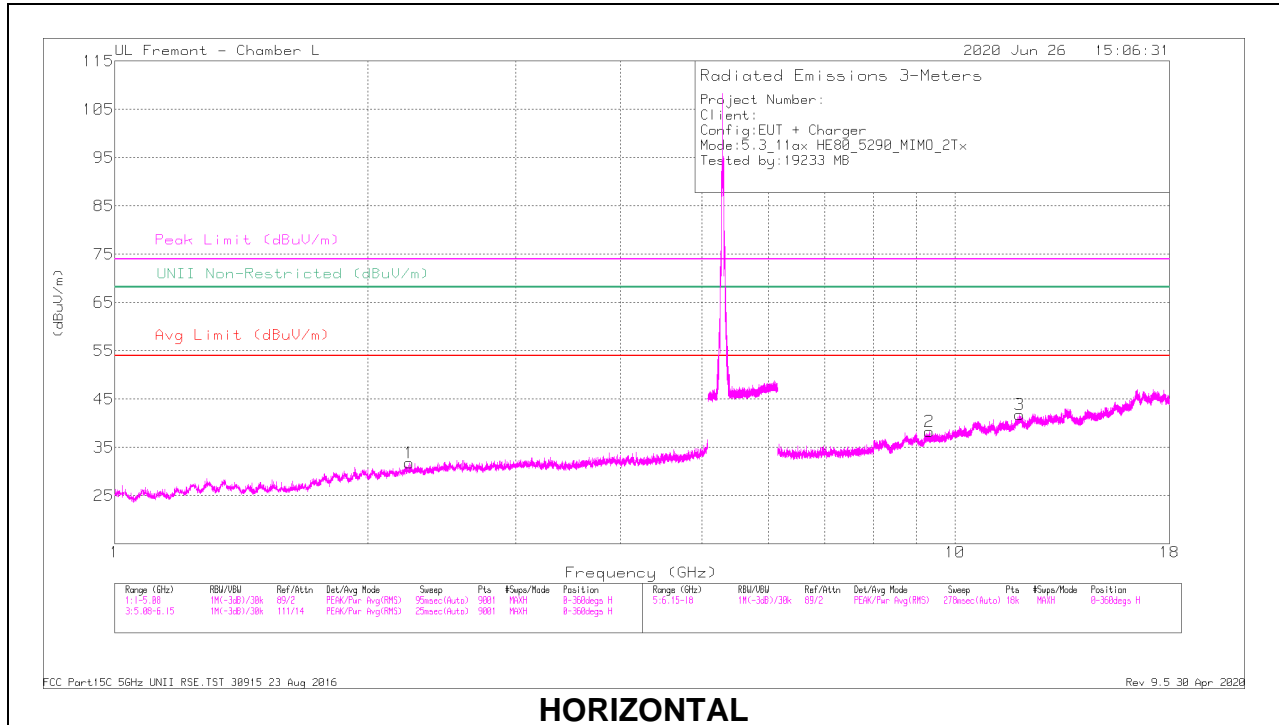

HORIZONTAL

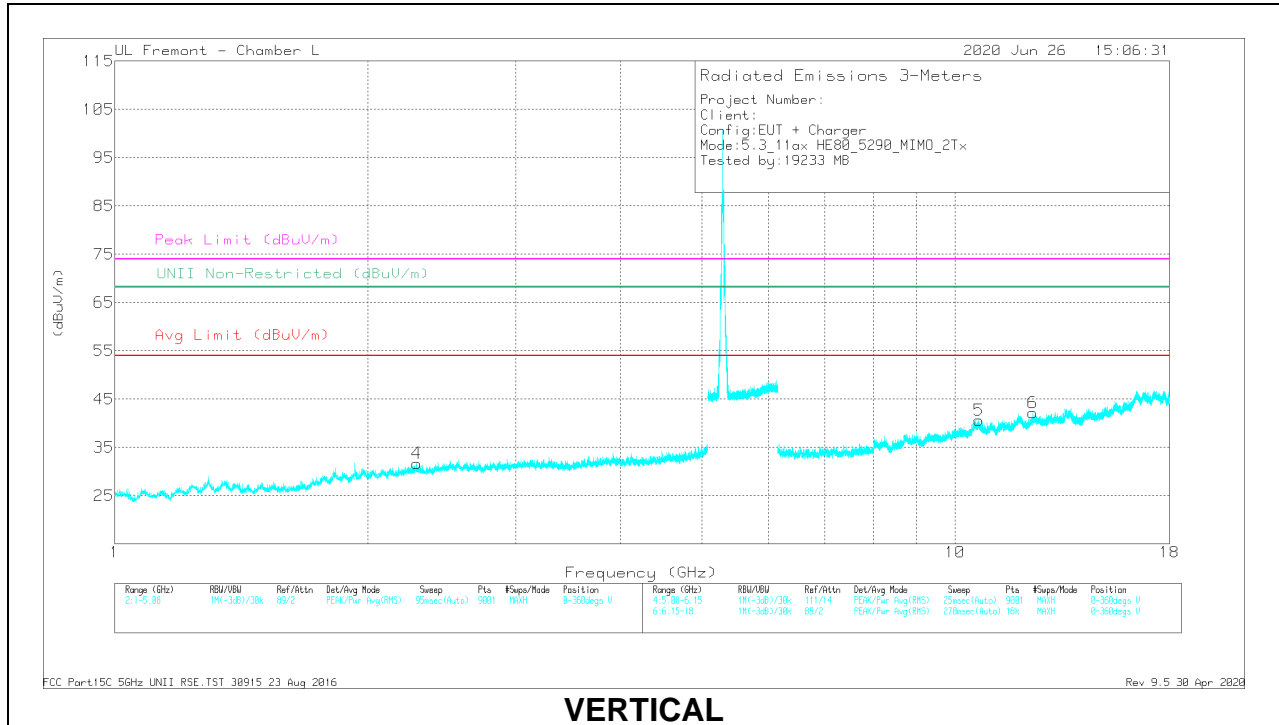

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbf/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.23747	39.77	PK-U	31.7	-31.2	40.27	-	-	74	-33.73	-	-	354	215	H
	* 2.2401	28.79	ADR	31.7	-31.2	29.29	54	-24.71	-	-	-	-	354	215	H
4	* 2.28534	39	PK-U	31.8	-31	39.8	-	-	74	-34.2	-	-	40	392	V
	* 2.29033	28.83	ADR	31.8	-31	29.63	54	-24.37	-	-	-	-	40	392	V
2	* 9.32846	31.39	PK-U	36.5	-20.9	46.99	-	-	74	-27.01	-	-	52	368	H
	* 9.33019	21.41	ADR	36.5	-21	36.91	54	-17.09	-	-	-	-	52	368	H
3	* 11.93797	30.71	PK-U	38.7	-19.5	49.91	-	-	74	-24.09	-	-	129	383	H
	* 11.93747	20.54	ADR	38.7	-19.5	39.74	54	-14.26	-	-	-	-	129	383	H
5	* 10.68954	30.22	PK-U	37.9	-19.5	48.62	-	-	74	-25.38	-	-	159	331	V
	* 10.67939	20.19	ADR	38	-19.5	38.69	54	-15.31	-	-	-	-	159	331	V
6	* 12.36911	31.27	PK-U	39	-19.7	50.57	-	-	74	-23.43	-	-	174	394	V
	* 12.37159	20.29	ADR	39	-19.7	39.59	54	-14.41	-	-	-	-	174	394	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.1.13. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND

1TX Antenna 5 MODE, MCS 7

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

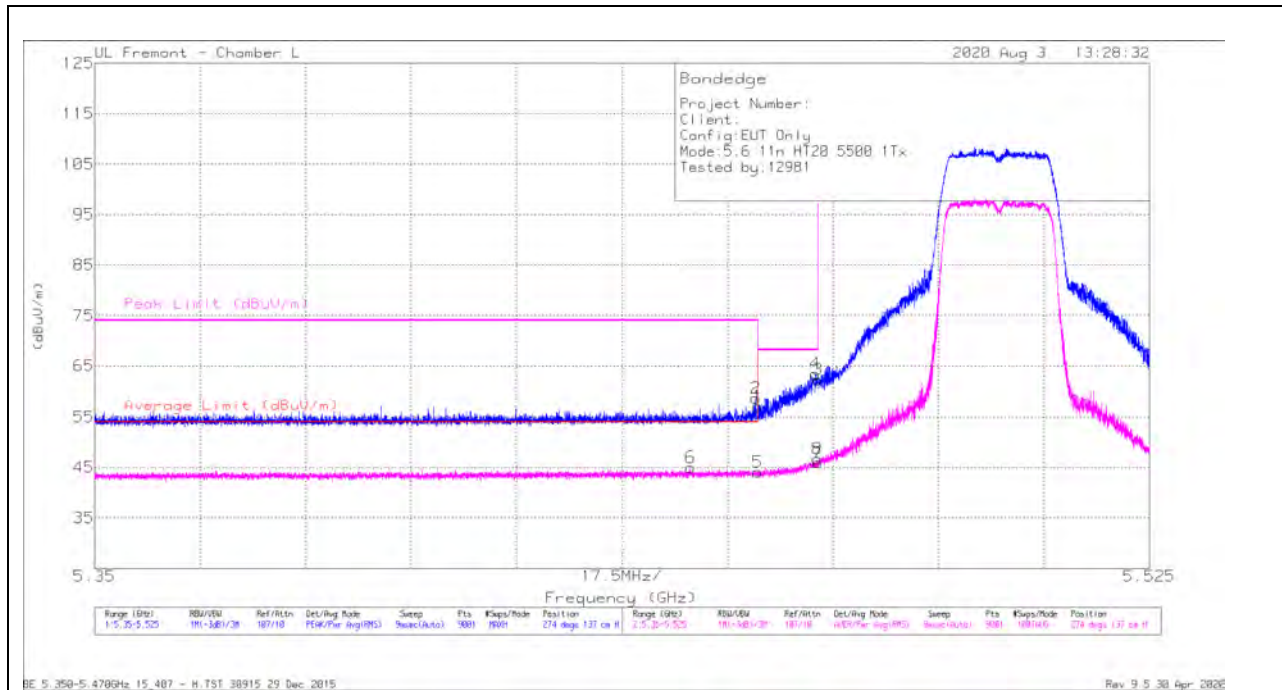

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	39.41	Pk	34.6	-16.9	0	57.11	-	-	74	-16.89	274	137	H
2	* 5.4597	41	Pk	34.6	-16.9	0	58.7	-	-	74	-16.3	274	137	H
3	5.46999	44.62	Pk	34.6	-16.9	0	62.32	-	-	68.2	-5.88	274	137	H
4	5.46954	45.8	Pk	34.6	-16.9	0	63.5	-	-	68.2	-4.7	274	137	H
5	* 5.45999	26.04	RMS	34.6	-16.9	0.36	44.1	54	-9.9	-	-	274	137	H
6	* 5.44883	26.96	RMS	34.6	-16.9	0.36	45.02	54	-8.98	-	-	274	137	H
7	5.46999	27.93	RMS	34.6	-16.9	0.36	46.99	-	-	-	-	274	137	H
8	5.46993	28.59	RMS	34.6	-16.9	0.36	46.65	-	-	-	-	274	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

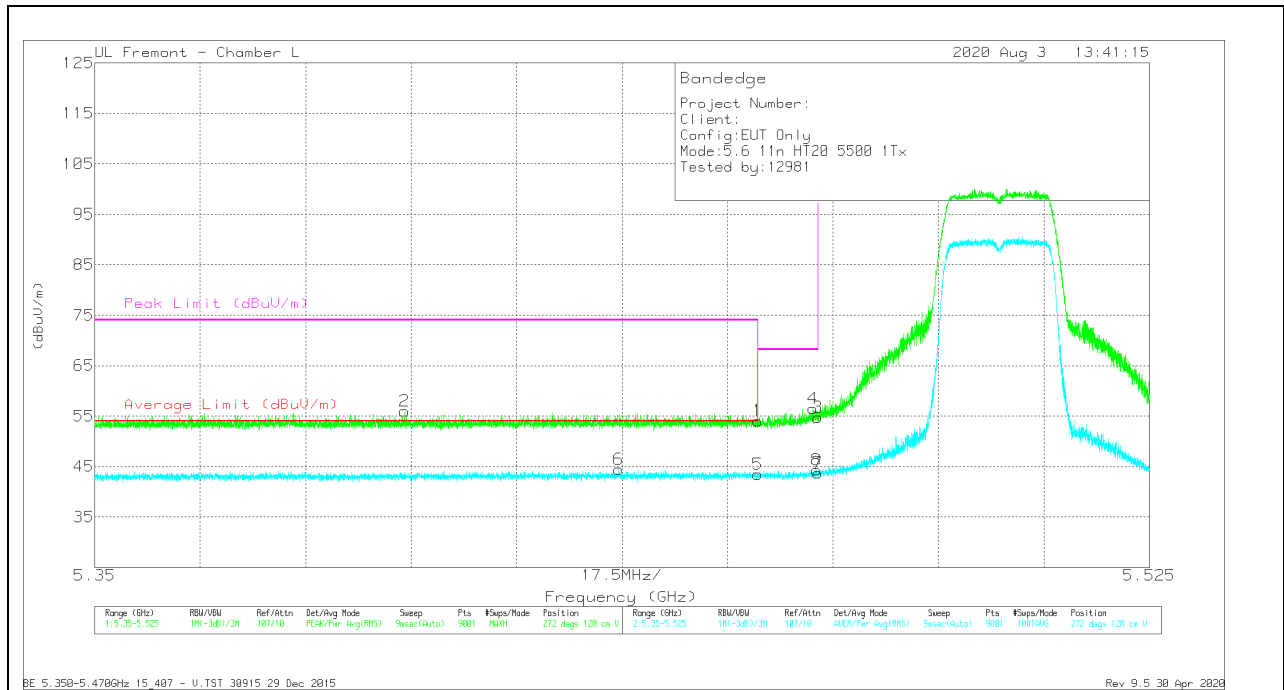


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/CbM/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	36.38	Pk	34.6	-16.9	0	54.08	-	-	74	-19.92	272	128	V
2	* 5.40141	38.39	Pk	34.5	-16.9	0	55.99	-	-	74	-18.01	272	128	V
3	5.46999	37.07	Pk	34.6	-16.9	0	54.77	-	-	68.2	-13.43	272	128	V
4	5.46913	38.78	Pk	34.6	-16.9	0	55.48	-	-	68.2	-11.72	272	128	V
5	* 5.45999	25.37	RMS	34.6	-16.9	0.36	43.43	54	-10.57	-	-	272	128	V
6	* 5.43693	28.46	RMS	34.6	-16.9	0.36	44.52	54	-9.48	-	-	272	128	V
7	5.46999	25.61	RMS	34.6	-16.9	0.36	43.67	-	-	-	-	272	128	V
8	5.46974	26.3	RMS	34.6	-16.9	0.36	44.36	-	-	-	-	272	128	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

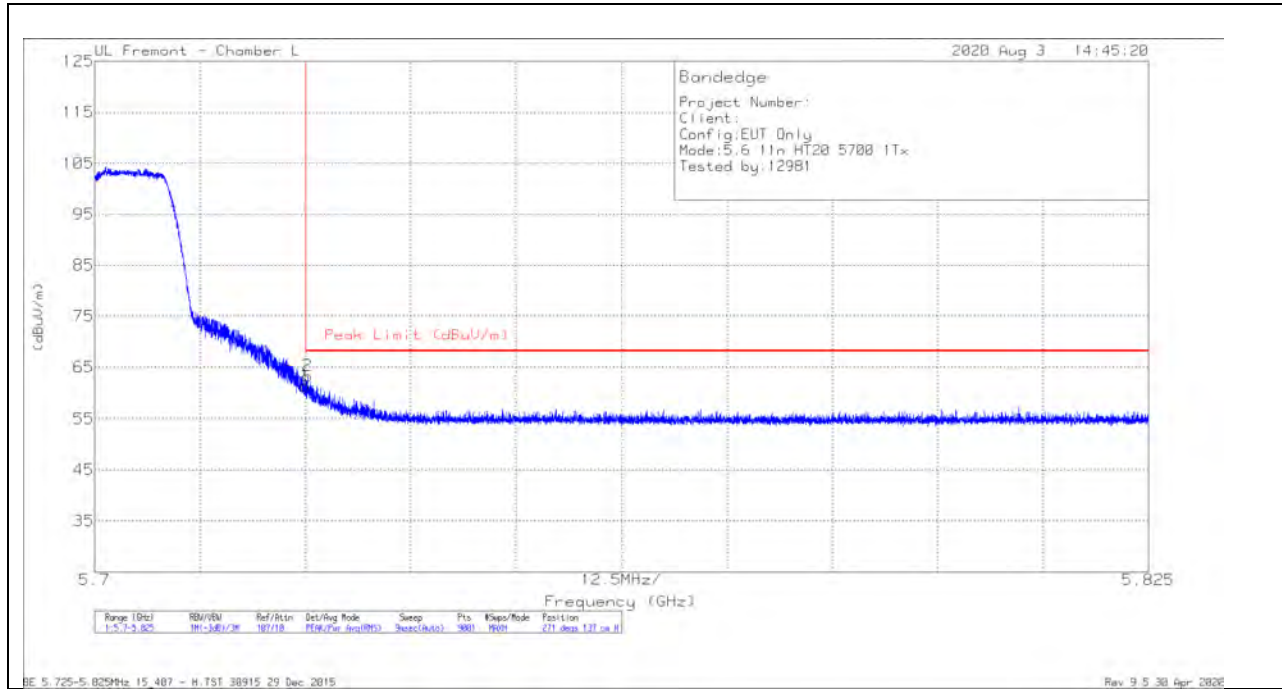

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.31	Pk	34.7	-16.6	61.41	68.2	-6.79	271	137	H
2	5.72526	45.26	Pk	34.7	-16.6	63.36	68.2	-4.84	271	137	H

Pk - Peak detector

VERTICAL RESULT

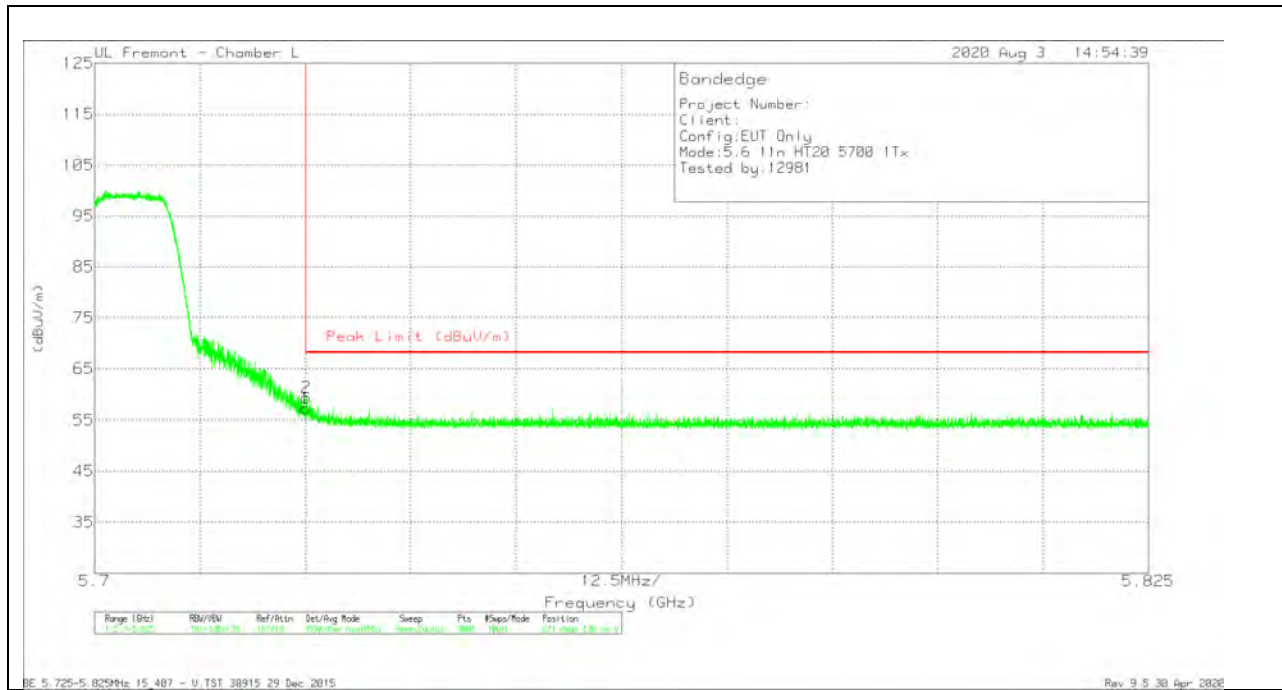


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.29	Pk	34.7	-16.6	57.39	68.2	-10.81	221	130	V
2	5.72513	41.35	Pk	34.7	-16.6	59.45	68.2	-8.75	221	130	V

1TX Antenna 6 MODE, MCS 7

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

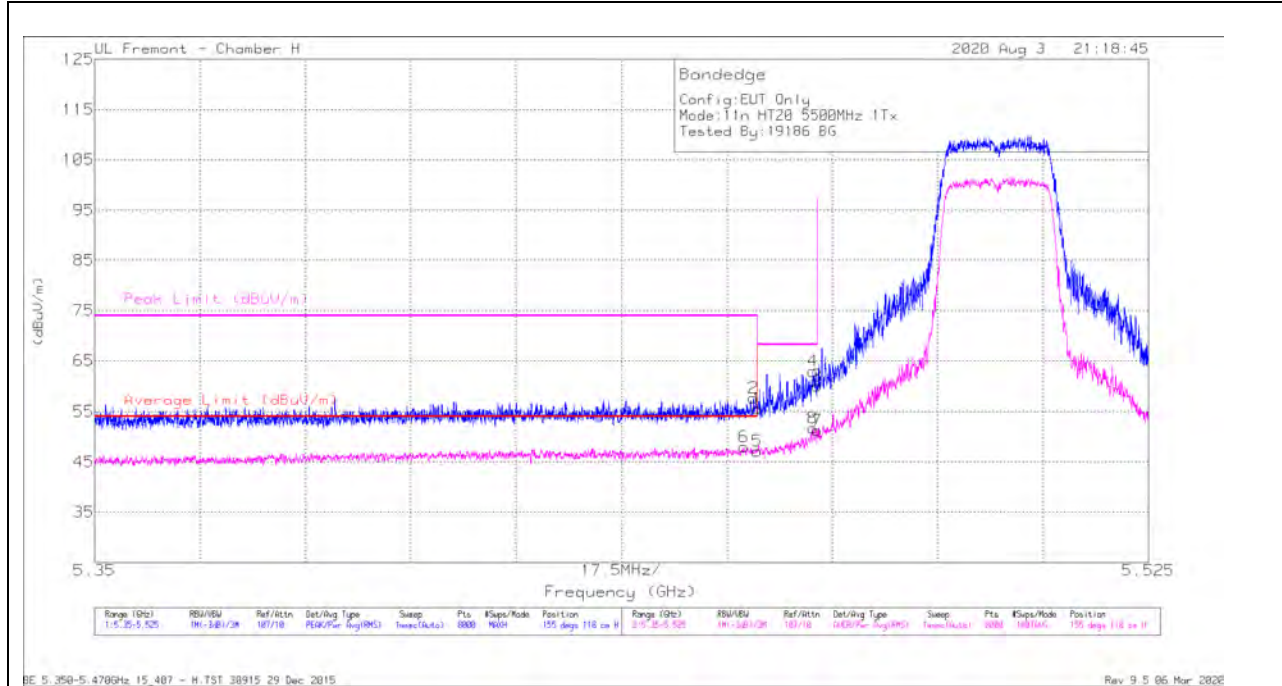

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.35	Pk	35.2	-20.9	0	55.65	-	-	74	-18.35	155	118	H
2	* 5.45943	43.45	Pk	35.2	-20.9	0	57.75	-	-	74	-16.25	155	118	H
5	* 5.45998	32.89	RMS	35.2	-20.9	0.36	47.55	54	-6.45	-	-	155	118	H
6	* 5.45779	33.6	RMS	35.3	-20.9	0.36	48.36	54	-5.64	-	-	155	118	H
4	5.46924	48.64	Pk	35.3	-21	0	62.94	-	-	68.2	-5.26	155	118	H
8	5.4693	37.43	RMS	35.3	-21	0.36	52.09	-	-	-	-	155	118	H
3	5.46998	45.75	Pk	35.3	-21	0	60.05	-	-	68.2	-8.15	155	118	H
7	5.46998	36.96	RMS	35.3	-21	0.36	51.62	-	-	-	-	155	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

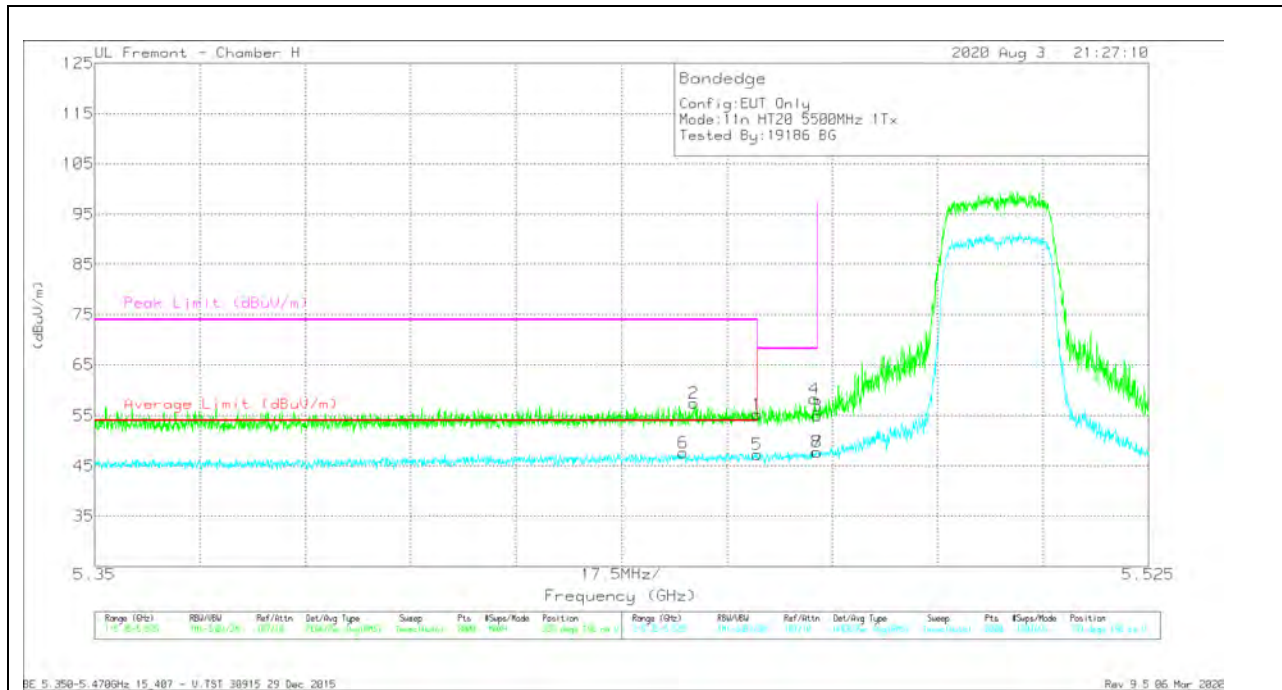


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Ftr/Par d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.96	Pk	35.2	-20.9	0	55.26	-	-	74	-18.74	339	198	V
2	* 5.4495	43.16	Pk	35.1	-20.8	0	57.46	-	-	74	-16.54	339	198	V
5	* 5.45998	32.91	RMS	35.2	-20.9	0.36	47.57	54	-6.43	-	-	339	198	V
6	* 5.44775	33.36	RMS	35.1	-20.8	0.36	48.02	54	-5.98	-	-	339	198	V
4	5.46952	44	Pk	35.3	-21	0	58.3	-	-	68.2	-9.9	339	198	V
8	5.46994	33.51	RMS	35.3	-21	0.36	48.17	-	-	-	-	339	198	V
3	5.46998	40.69	Pk	35.3	-21	0	54.99	-	-	68.2	-13.21	339	198	V
7	5.46998	33.45	RMS	35.3	-21	0.36	48.11	-	-	-	-	339	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

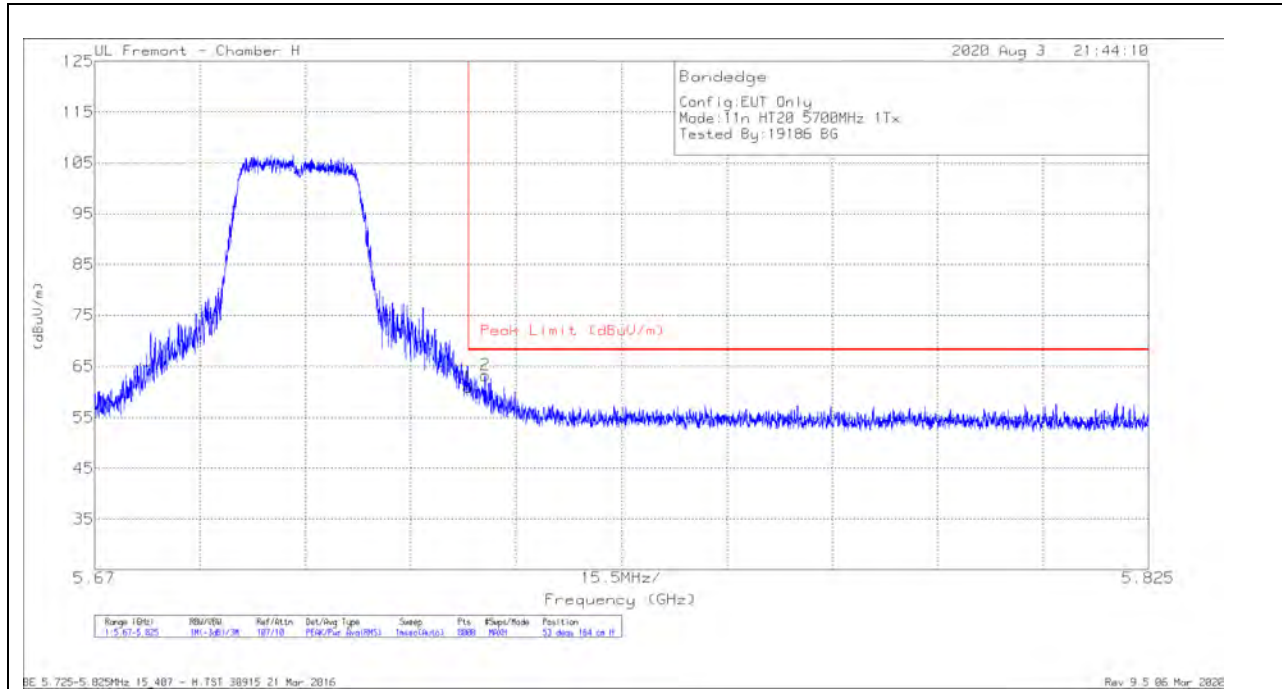

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.98	Pk	35	-21.1	0	60.88	68.2	-7.32	53	164	H
2	5.72743	49.43	Pk	34.9	-21.1	0	63.23	68.2	-4.97	53	164	H

Pk - Peak detector

VERTICAL RESULT

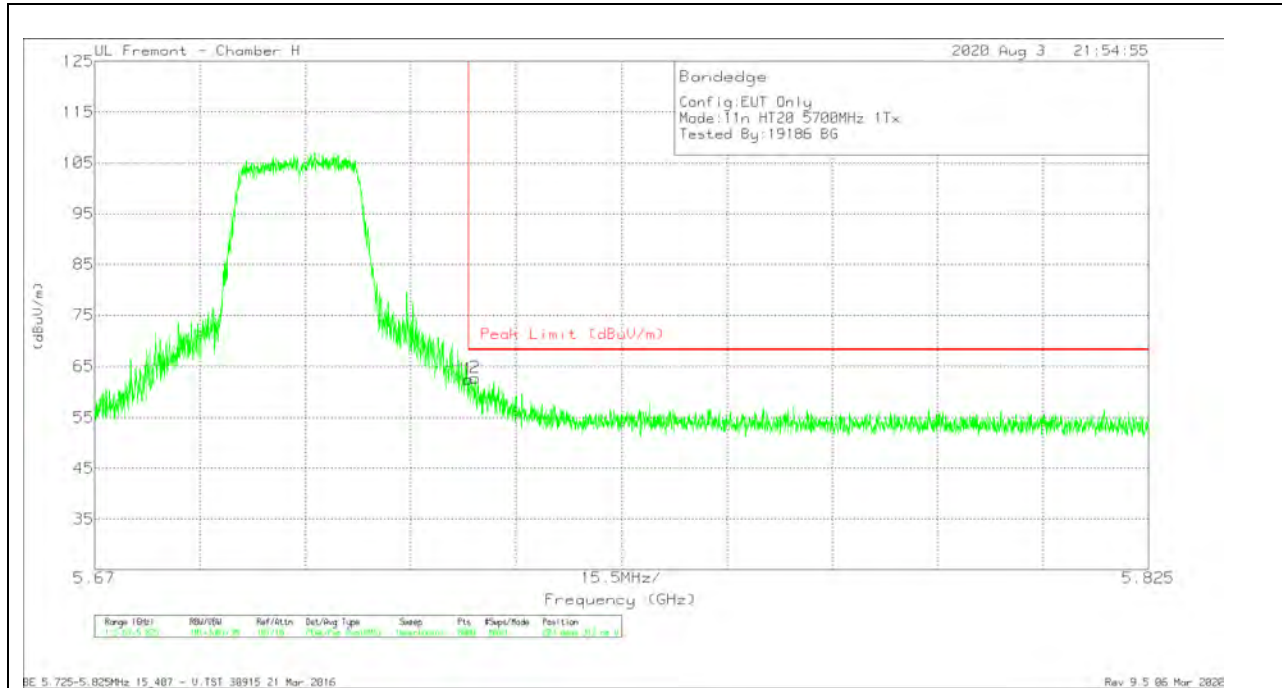


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	48.68	Pk	35	-21.1	0	62.58	68.2	-5.62	203	312	V
2	5.72594	48.95	Pk	34.9	-21.1	0	62.75	68.2	-5.45	203	312	V

Pk - Peak detector

2TX Antenna 5 + Antenna 6 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

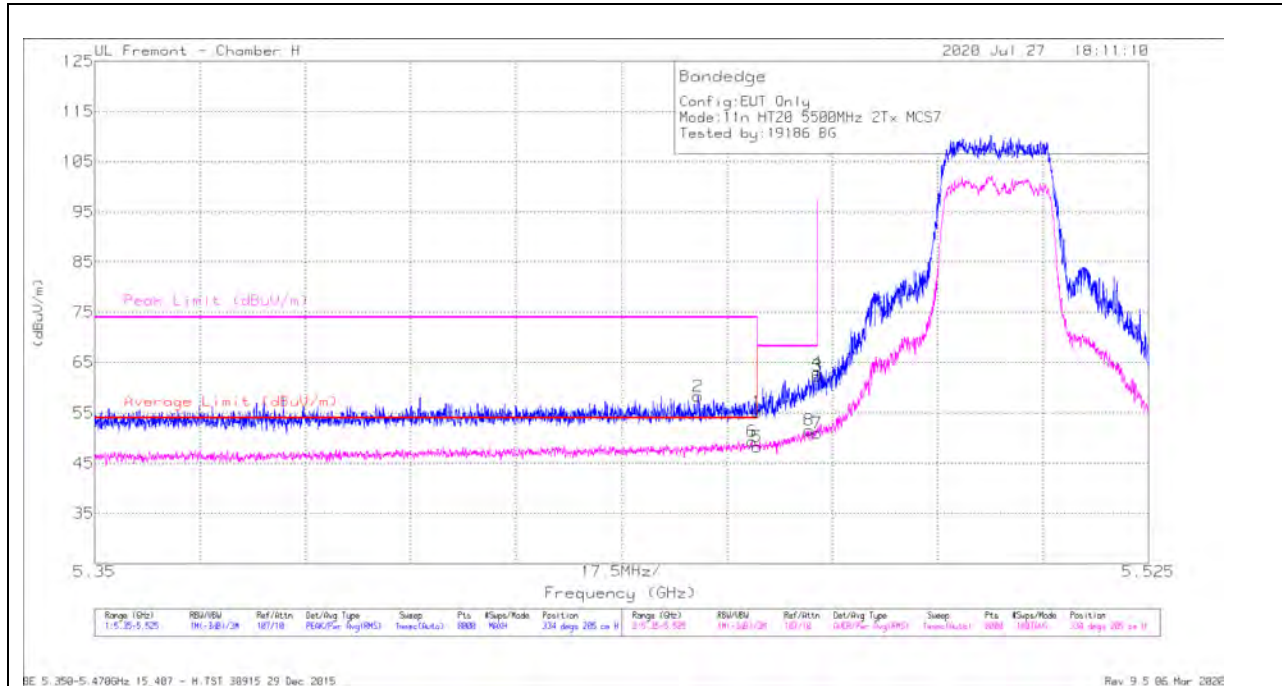

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1863 (dBm)	Amp/Cal/Freq/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.91	Pk	35.2	-20.9	0	55.21	-	-	74	-18.79	334	205	H
2	* 5.45018	44.16	Pk	35.1	-20.9	0	58.36	-	-	74	-15.64	334	205	H
5	* 5.45998	33.42	RMS	35.2	-20.9	0.36	48.47	54	-5.53	-	-	334	205	H
6	* 5.45913	34.35	RMS	35.3	-20.9	0.36	49.45	54	-4.55	-	-	334	205	H
8	5.46862	36.74	RMS	35.3	-21	0.36	58.71	-	-	-	-	334	205	H
4	5.46996	48.66	Pk	35.3	-21	0	48.4	-	-	68.2	-5.24	334	205	H
3	5.46998	49.01	Pk	35.3	-21	0	56.99	-	-	68.2	-5.89	334	205	H
7	5.46998	36.08	RMS	35.3	-21	0.36	47.69	-	-	-	-	334	205	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

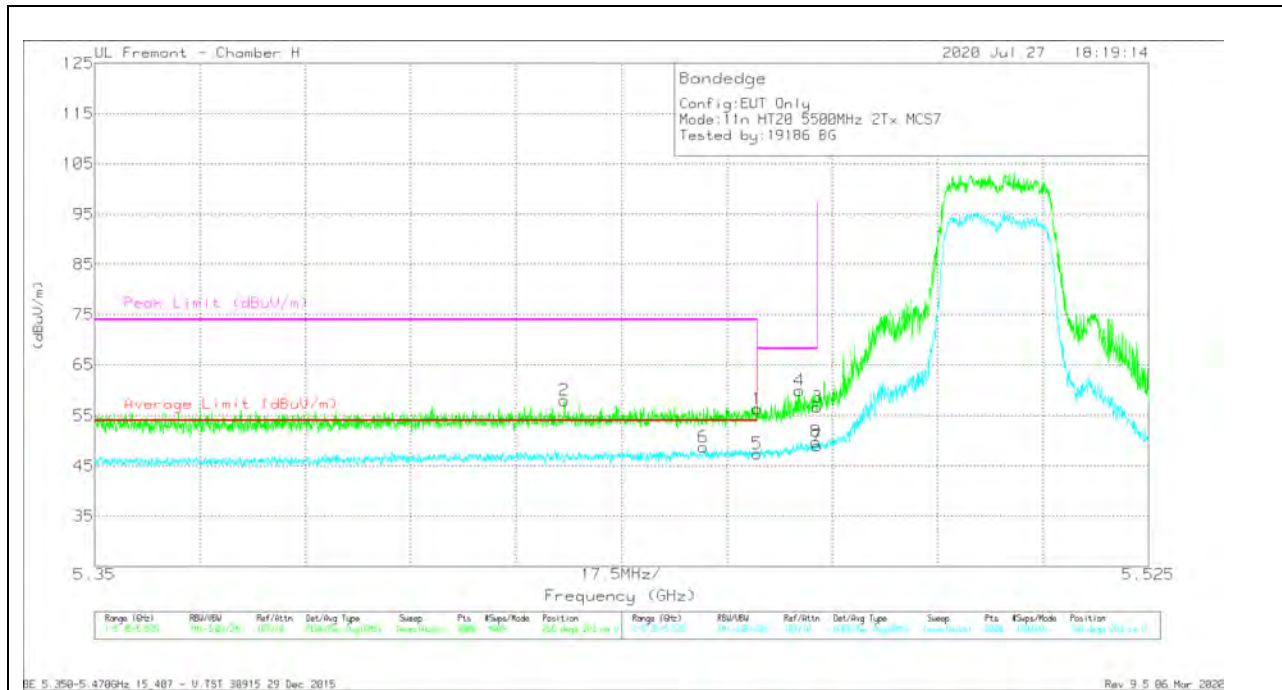


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1563 (dB/m)	Amp/CM/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.08	Pk	35.2	-20.9	0	56.38	-	-	74	-17.62	268	283	V
2	* 5.42802	43.85	Pk	35.1	-20.9	0	58.05	-	-	74	-15.95	268	283	V
5	* 5.45998	32.56	RMS	35.2	-20.9	0.36	47.22	54	-6.78	-	-	268	283	V
6	* 5.45108	34	RMS	35.1	-20.9	0.36	48.58	54	-5.44	-	-	268	283	V
4	5.46703	45.59	Pk	35.3	-20.9	0	59.99	-	-	68.2	-8.21	268	283	V
8	5.48978	34.93	RMS	35.3	-21	0.36	49.59	-	-	-	-	268	283	V
3	5.46998	42.48	Pk	35.3	-21	0	56.78	-	-	68.2	-11.42	268	283	V
7	5.46998	34.08	RMS	35.3	-21	0.36	48.74	-	-	-	-	268	283	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

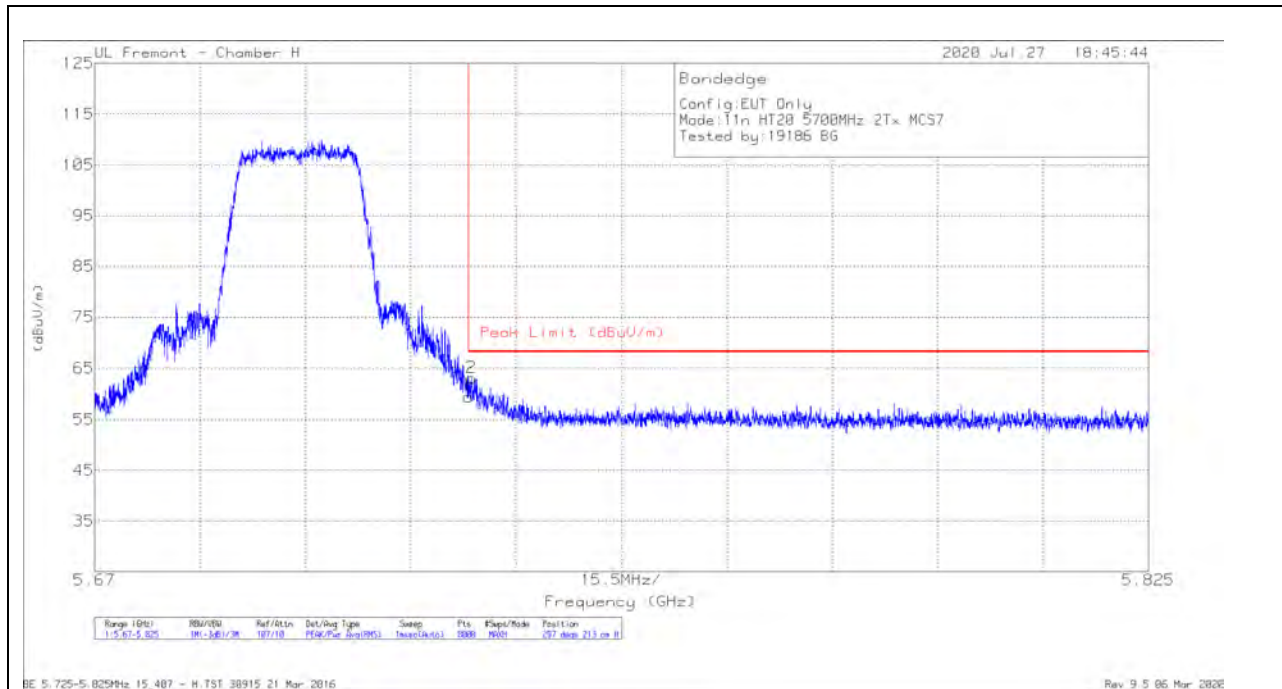

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.58	PK	35	-21.1	0	59.48	68.2	-8.72	297	213	H
2	5.72544	49.33	PK	34.9	-21.1	0	63.13	68.2	-5.07	297	213	H

Pk - Peak detector

VERTICAL RESULT

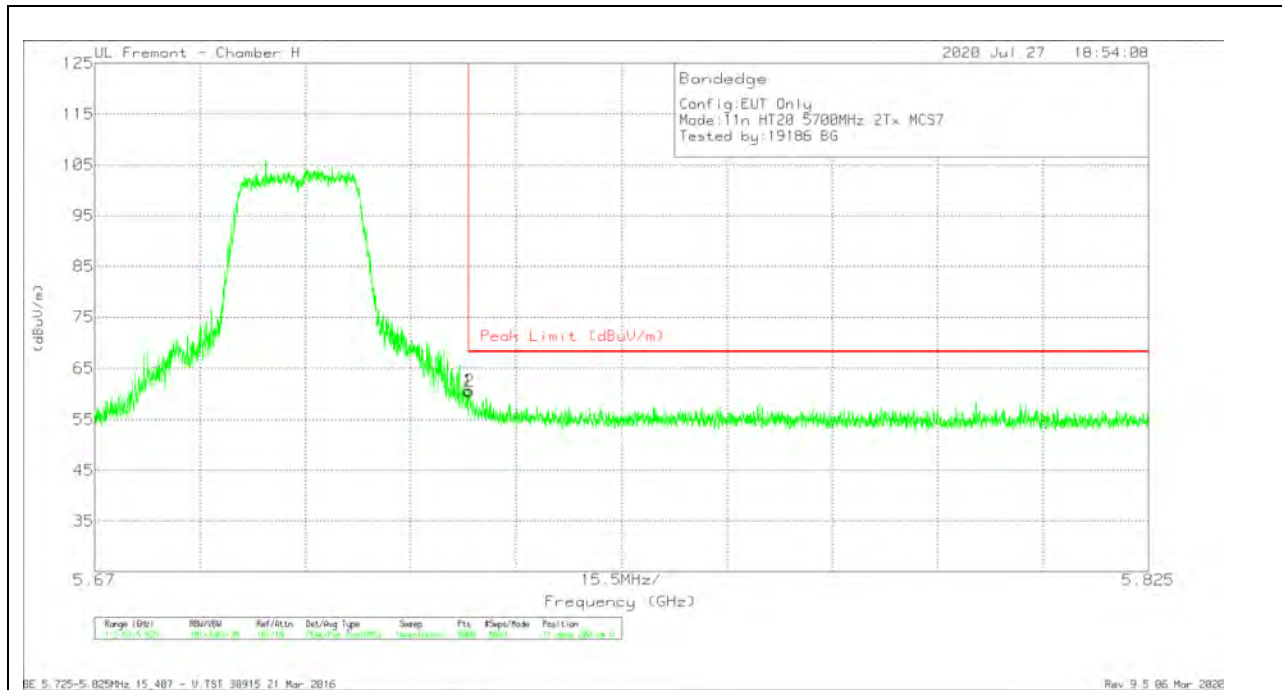


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.81	Pk	35	-21.1	0	60.71	68.2	-7.49	71	200	V
2	5.72517	46.66	Pk	35	-21.1	0	60.56	68.2	-7.64	71	200	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

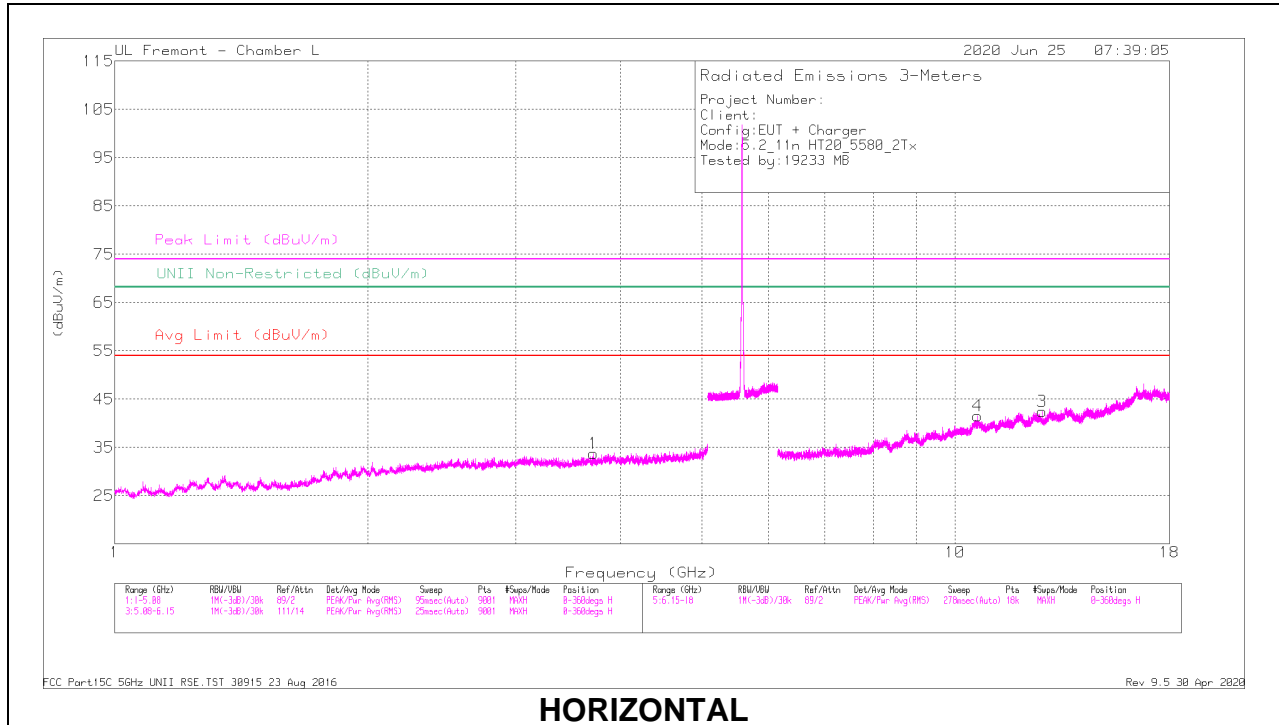

HORIZONTAL

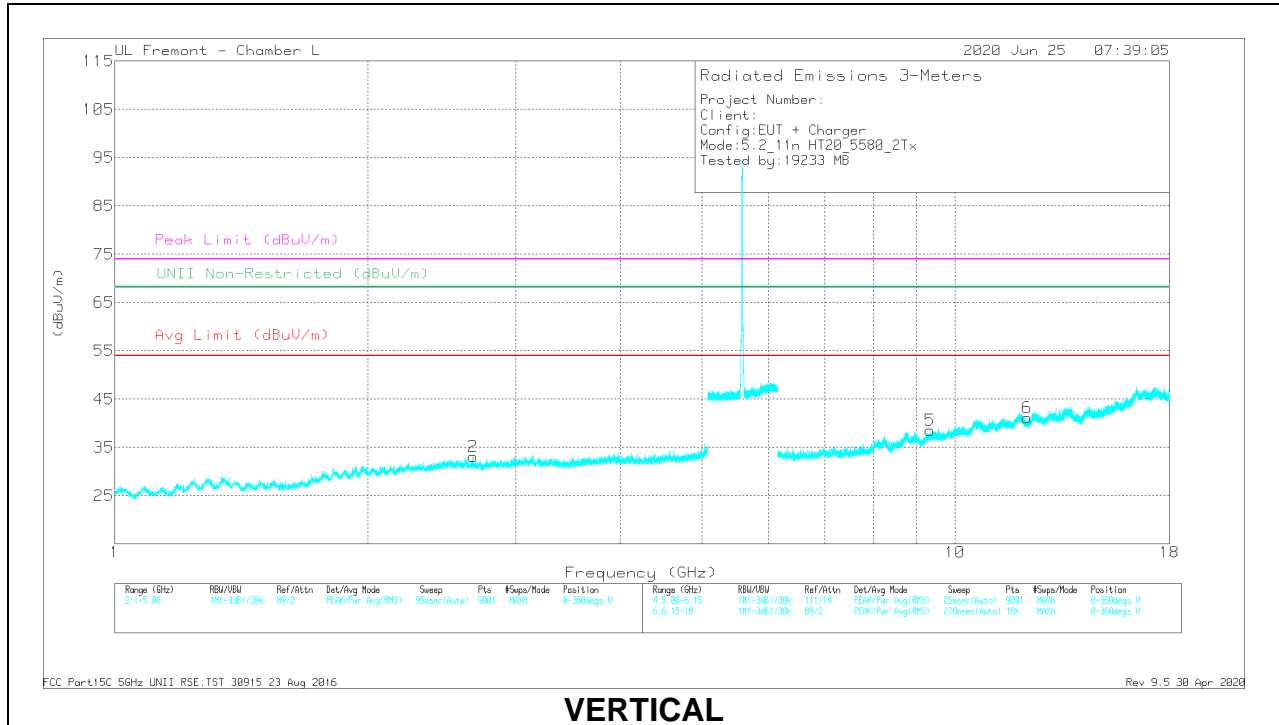

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.71322	37.35	PK-U	33.2	-28.6	41.95	-	-	74	-32.05	-	-	62	358	H
	3.70939	27.39	ADR	33.2	-28.6	31.99	54	-22.01	-	-	-	-	62	358	H
2	* 2.66627	39.15	PK-U	32.3	-30.3	41.15	-	-	74	-32.85	-	-	230	310	V
	2.67026	29.12	ADR	32.3	-30.3	31.12	54	-22.88	-	-	-	-	230	310	V
3	12.70515	30.45	PK-U	39.1	-20	49.55	-	-	-	-	68.2	-18.65	310	367	H
	12.70201	20.91	ADR	39.1	-19.9	40.11	-	-	-	-	-	-	310	367	H
4	* 10.63649	32.02	PK-U	37.9	-20.1	49.82	-	-	74	-24.18	-	-	88	343	H
	10.63628	21.8	ADR	37.9	-20.1	39.6	54	-14.4	-	-	-	-	88	343	H
5	* 9.34806	31.8	PK-U	36.5	-21.2	47.1	-	-	74	-26.9	-	-	131	358	V
	9.34538	21.75	ADR	36.5	-21.2	37.05	54	-16.95	-	-	-	-	131	358	V
6	* 12.18224	30.78	PK-U	38.9	-20	49.68	-	-	74	-24.32	-	-	310	368	V
	12.17919	20.39	ADR	38.9	-20.1	39.19	54	-14.81	-	-	-	-	310	368	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.1.14. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND

1TX Antenna 5 MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

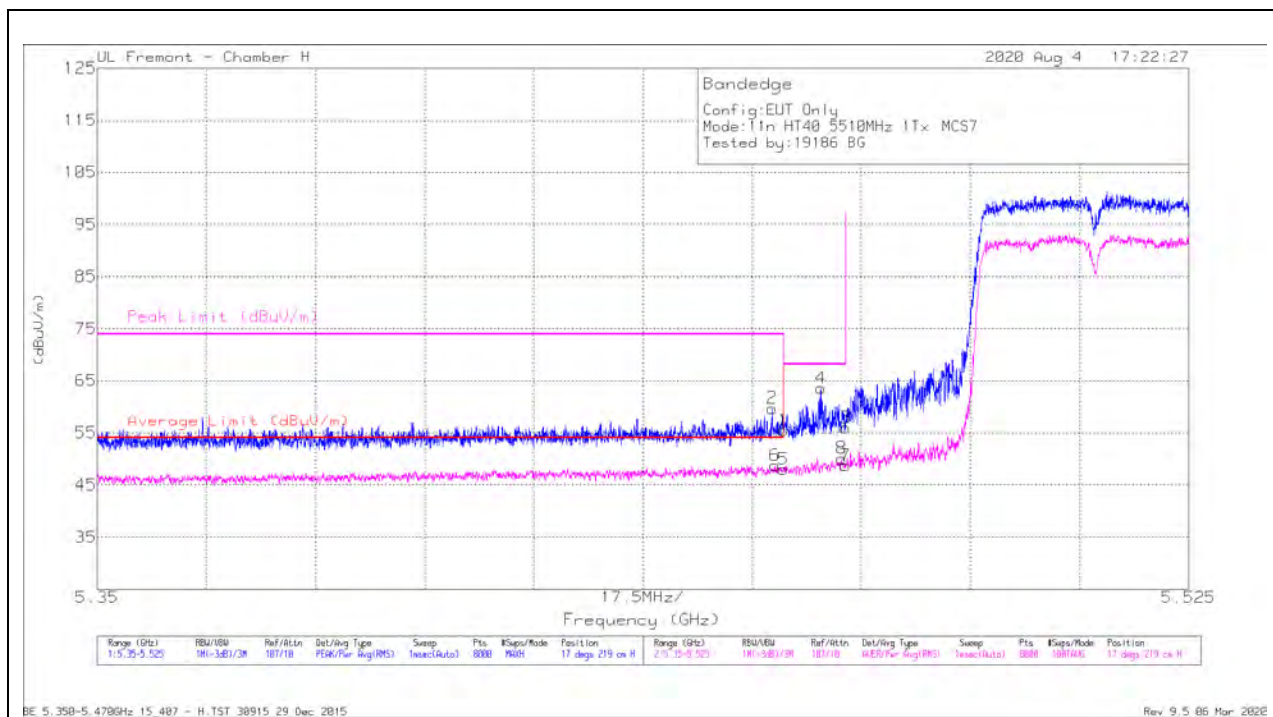

Marker	Frequency (GHz)	Meter Reading (dBu)	Det	AF 1863 (dBm)	Amp/Cal/Fit/Pad (dB)	DC Corr (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.19	Pk	35.2	-20.9	0	35.48	-	-	74	-18.52	17	219	H
2	* 5.45823	45.36	Pk	35.3	-20.9	0	59.76	-	-	74	-14.24	17	219	H
5	* 5.45998	33.04	RMS	35.2	-20.9	0.61	47.95	54	-6.05	-	-	17	219	H
6	* 5.45862	33.77	RMS	35.3	-20.9	0.61	48.78	54	-5.22	-	-	17	219	H
4	5.466	49.24	Pk	35.2	-20.9	0	63.54	-	-	68.2	-4.66	17	219	H
8	5.46937	35.23	RMS	35.3	-21	0.61	50.14	-	-	-	-	17	219	H
3	5.46998	41.68	Pk	35.3	-21	0	55.98	-	-	68.2	-12.22	17	219	H
7	5.46998	33.8	RMS	35.3	-21	0.61	48.71	-	-	-	-	17	219	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

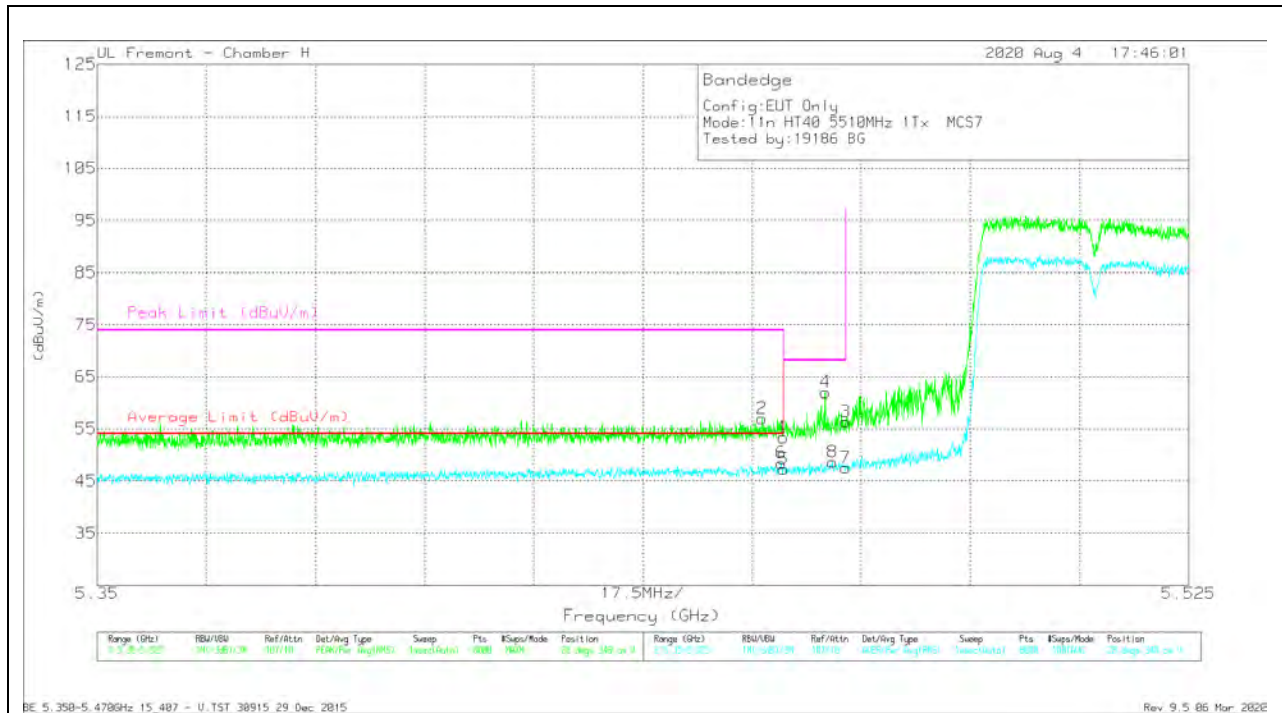


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.45998	39.11	PK	35.2	-20.9	0	53.41	-	-	74	-20.59	28	348	V
2	*5.45661	42.54	PK	35.3	-20.9	0	56.94	-	-	74	-17.06	28	348	V
5	*5.45998	32.36	RMS	35.2	-20.9	0.61	47.27	54	-6.73	-	-	28	348	V
6	*5.45965	33.52	RMS	35.2	-20.9	0.61	48.43	54	-5.57	-	-	28	348	V
4	5.46672	47.73	PK	35.2	-20.9	0	62.03	-	-	68.2	-6.17	28	348	V
8	5.46788	33.64	RMS	35.3	-20.9	0.61	48.65	-	-	-	-	28	348	V
3	5.46998	42.1	PK	35.3	-21	0	56.4	-	-	68.2	-11.8	28	348	V
7	5.46998	32.54	RMS	35.3	-21	0.61	47.45	-	-	-	-	28	348	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

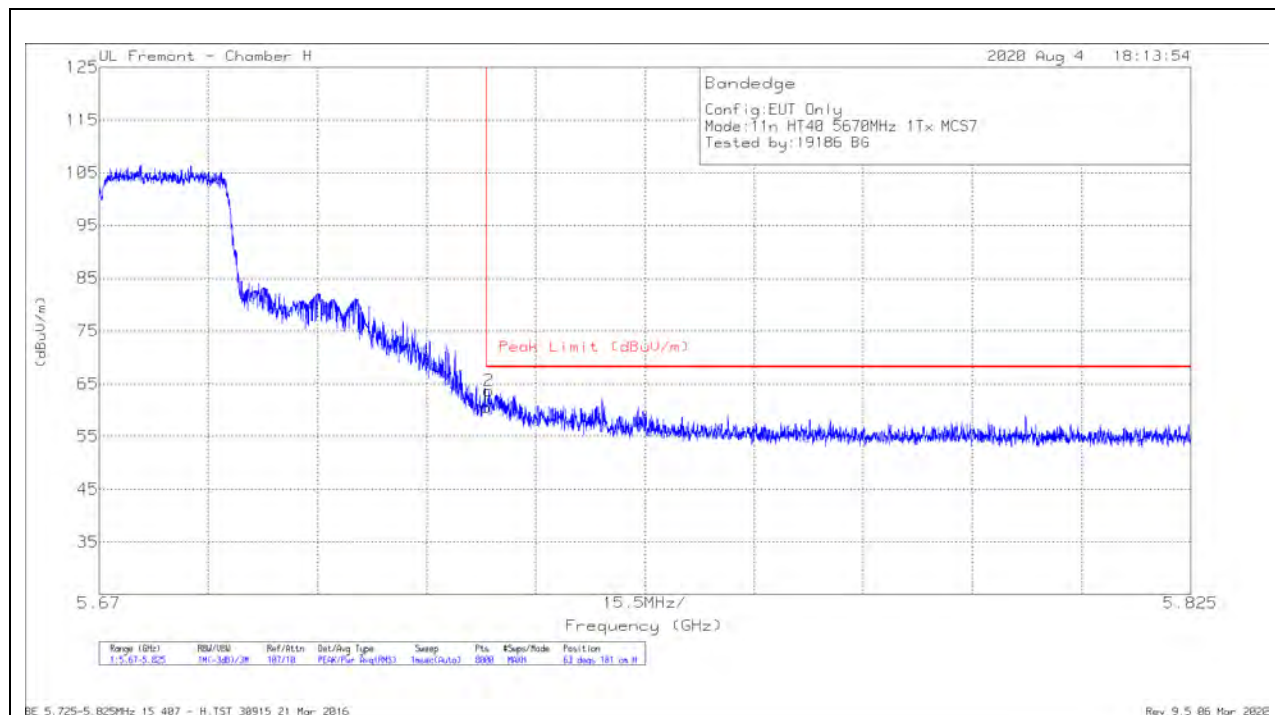

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.63	Pk	35	-21.1	0	60.53	68.2	-7.67	63	181	H
2	5.72536	49.81	Pk	34.9	-21.1	0	63.61	68.2	-4.59	63	181	H

Pk - Peak detector

VERTICAL RESULT

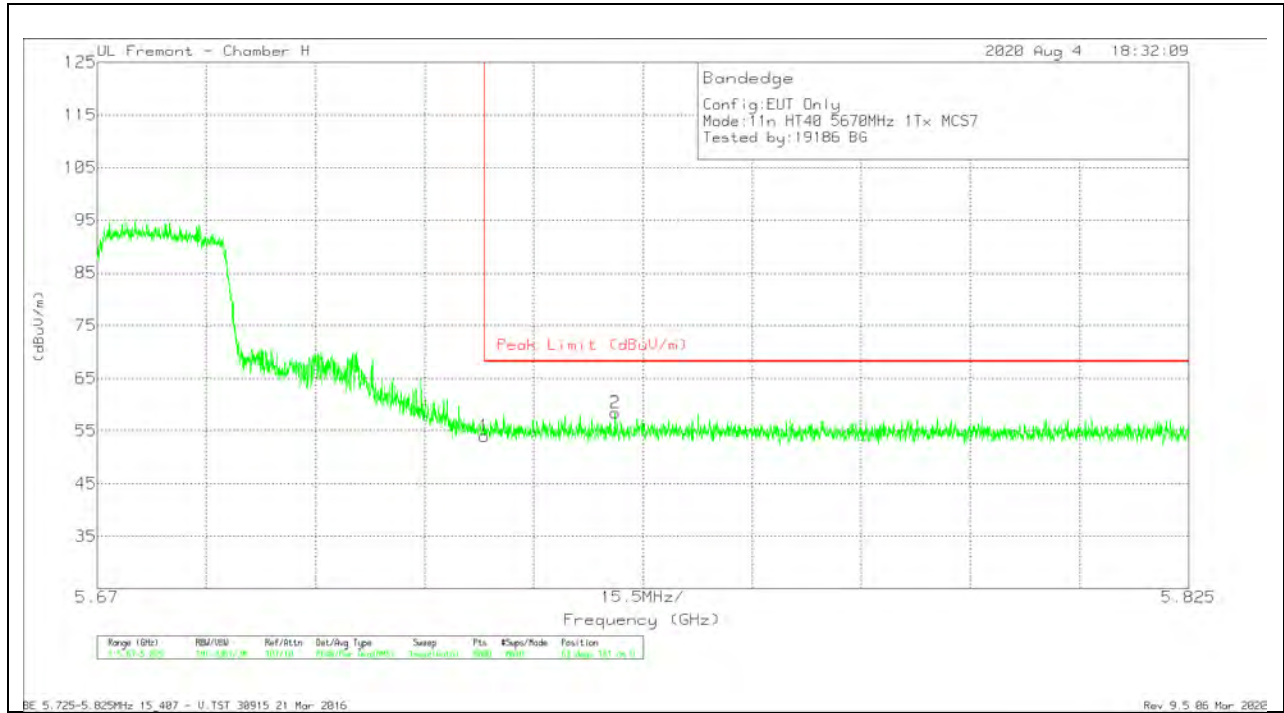


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.17	Pk	35	-21.1	54.07	68.2	-14.13	63	181	V
2	5.74354	44.42	Pk	35	-21	58.42	68.2	-9.78	63	181	V

Pk - Peak detector

1TX Antenna 6 MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

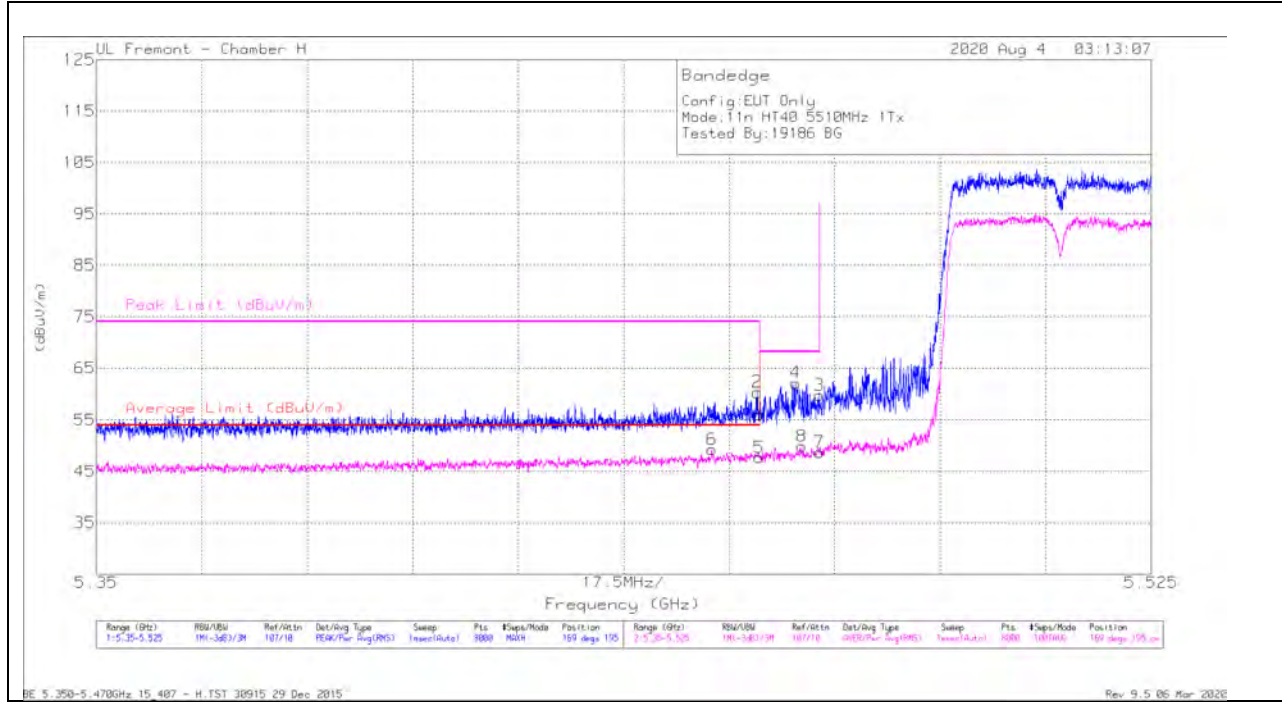

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF TR63 (dBm)	Amp/CM/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.77	Pk	35.2	-20.9	0	58.07	-	-	74	-17.93	169	195	H
2	* 5.45961	46.08	Pk	35.2	-20.9	0	60.38	-	-	74	-13.62	169	195	H
5	* 5.45998	33.32	RMS	35.2	-20.9	.61	48.23	54	-5.77	-	-	169	195	H
6	* 5.4521	34.89	RMS	35.2	-20.9	.61	49.8	54	-4.2	-	-	169	195	H
4	5.466	47.85	Pk	35.2	-20.9	0	62.15	-	-	68.2	-6.05	169	195	H
8	5.46705	35.42	RMS	35.3	-20.9	.61	50.43	-	-	-	-	169	195	H
3	5.46998	45.49	Pk	35.3	-21	0	59.79	-	-	68.2	-8.41	169	195	H
7	5.46998	34.32	RMS	35.3	-21	.61	49.73	-	-	-	-	169	195	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

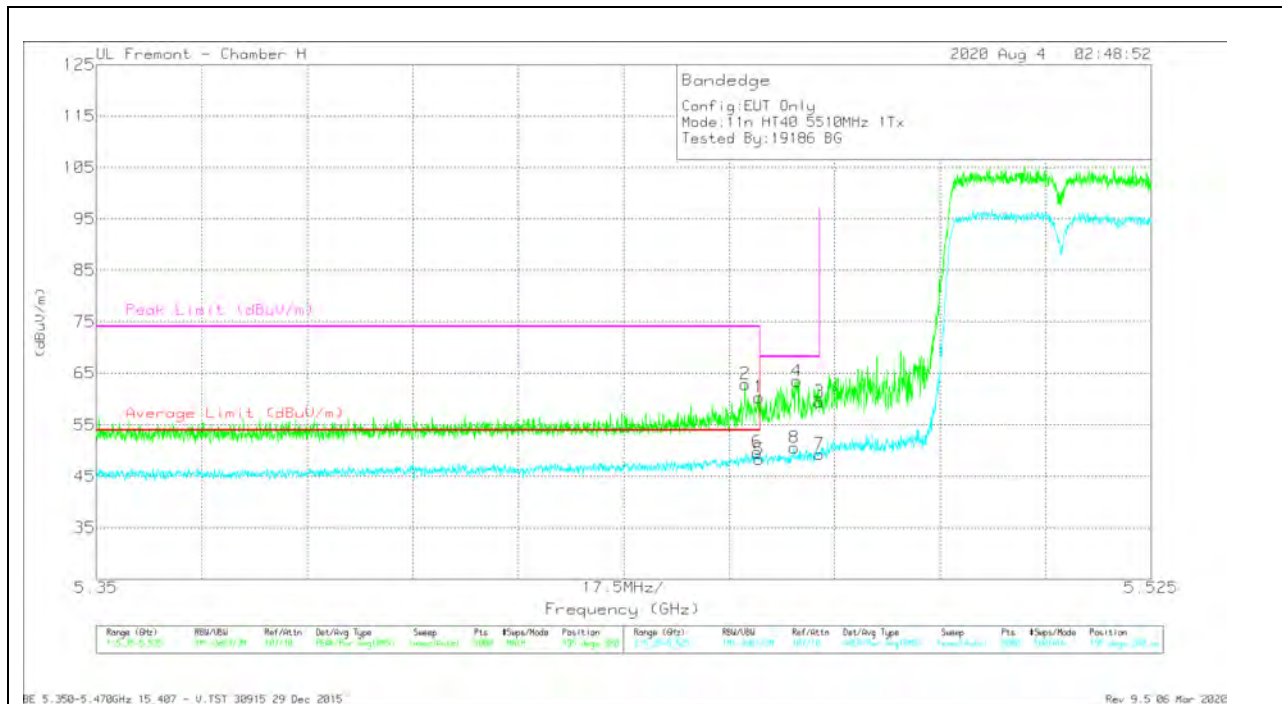


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1063 (dBm)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	46.08	Pk	35.2	-20.9	0	60.38	-	-	74	-13.62	195	280	V
2	* 5.45762	48.51	Pk	35.3	-20.9	0	62.91	-	-	74	-11.09	195	280	V
5	* 5.45998	33.91	RMS	35.2	-20.9	.61	48.82	54	-5.18	-	-	195	280	V
6	* 5.45961	36.35	RMS	35.2	-20.9	.61	50.26	54	-3.74	-	-	195	280	V
8	5.46576	36.21	RMS	35.2	-20.9	-1	50.61	-	-	-	-	195	280	V
4	5.46619	49.16	Pk	35.2	-20.9	0	63.46	-	-	68.2	-4.74	195	280	V
3	5.46998	45.19	Pk	35.3	-21	0	59.49	-	-	68.2	-8.71	195	280	V
7	5.46998	34.91	RMS	35.3	-21	.61	49.82	-	-	-	-	195	280	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

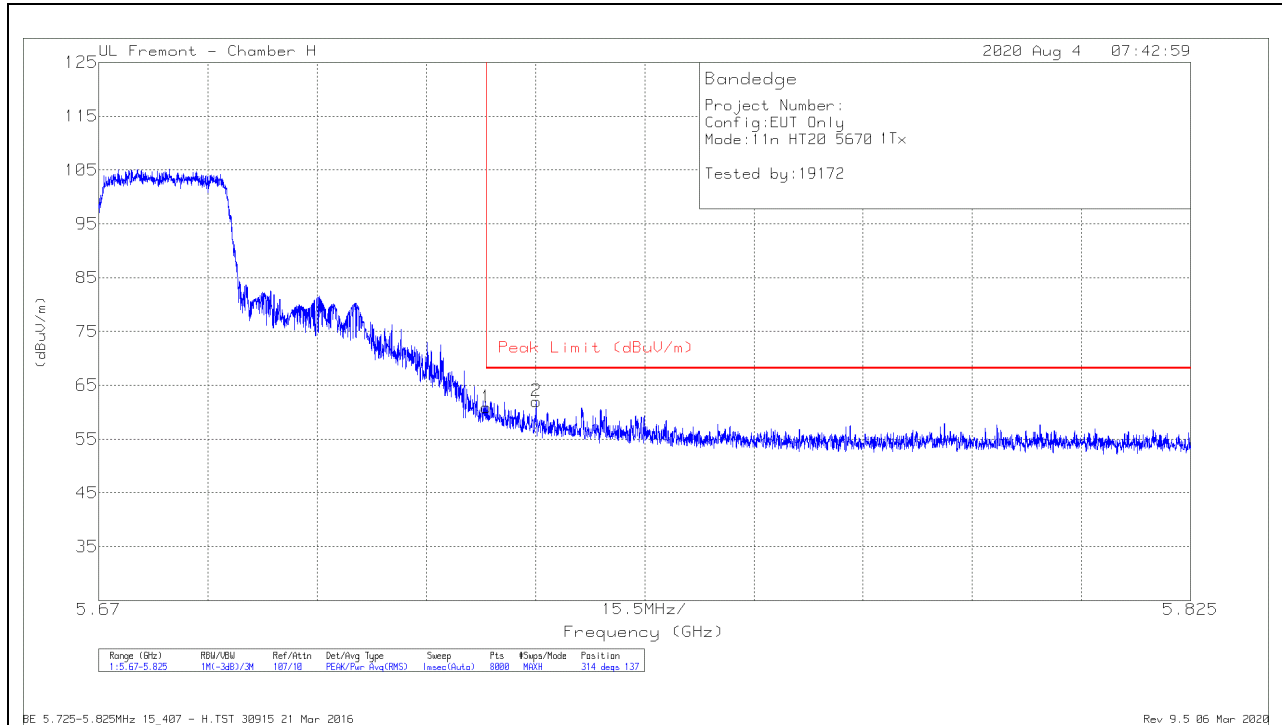

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47	Pk	35	-21.1	0	60.9	68.2	-7.3	314	137	H
2	5.7321	48.13	Pk	35	-21.1	0	62.03	68.2	-6.17	314	137	H

Pk - Peak detector

VERTICAL RESULT

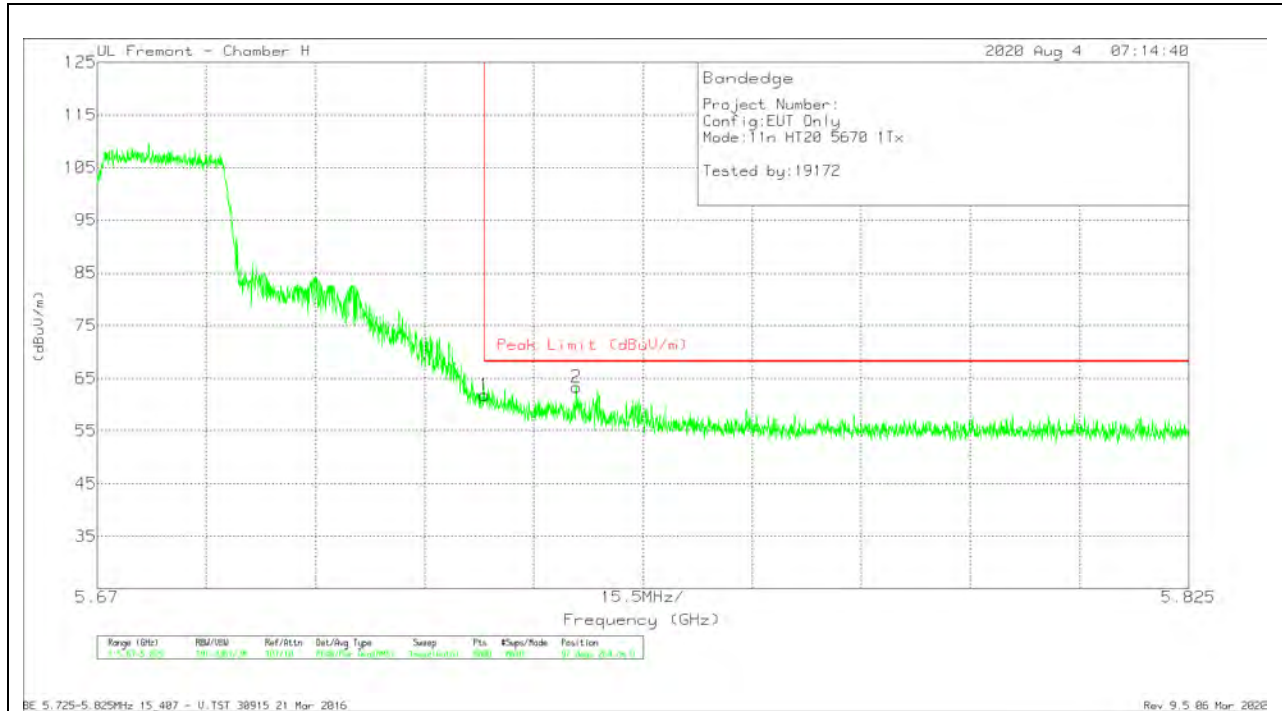


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.94	PK	35	-21.1	0	61.84	68.2	-6.36	97	264	V
2	5.73801	49.53	PK	34.9	-21.1	0	63.33	68.2	-4.87	97	264	V

Pk - Peak detector

2TX Antenna 5 + Antenna 6 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

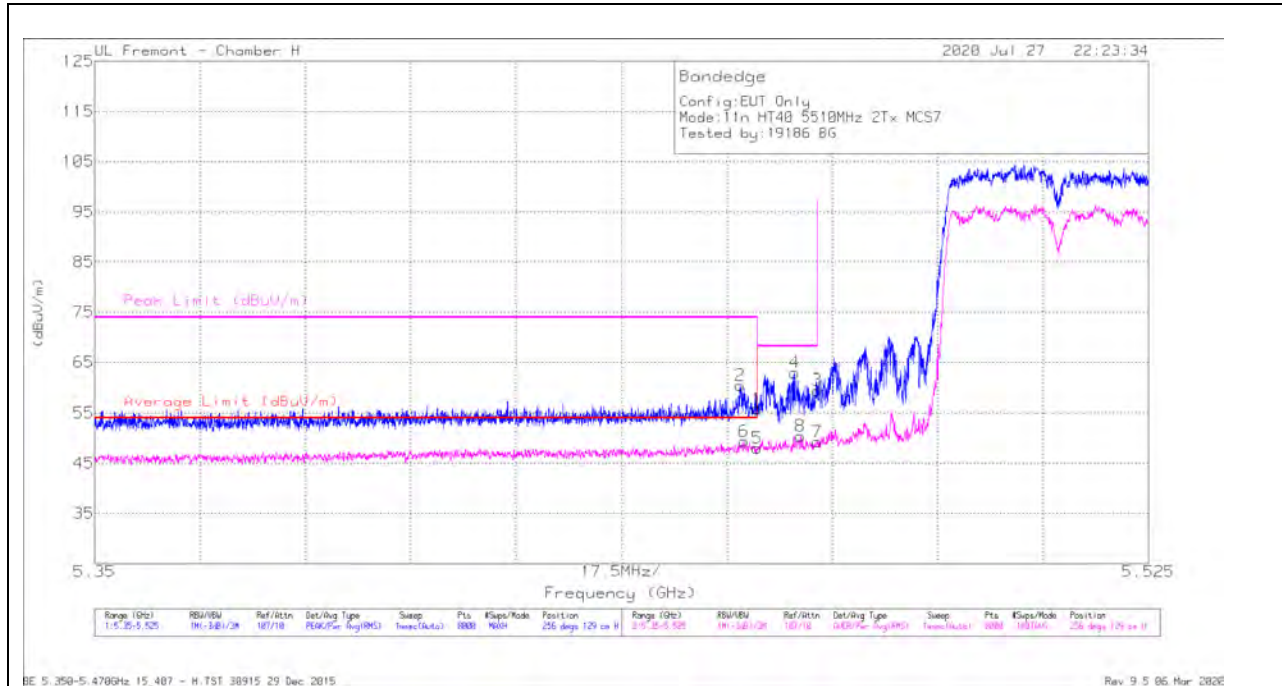

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1863 (dBm)	Amp/Cal/Fit/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.61	Pk	35.2	-20.9	0	35.91	-	-	74	-18.09	256	129	H
2	* 5.45725	46.04	Pk	35.3	-20.9	0	60.44	-	-	74	-13.56	256	129	H
5	* 5.45998	32.82	RMS	35.2	-20.9	0.61	47.73	54	-6.27	-	-	256	129	H
6	* 5.45779	34.04	RMS	35.3	-20.9	0.61	49.05	54	-4.95	-	-	256	129	H
4	5.46619	48.71	Pk	35.2	-20.9	0	63.01	-	-	68.2	-5.19	256	129	H
8	5.46722	35.15	RMS	35.3	-20.9	0.61	50.16	-	-	-	-	256	129	H
3	5.46998	45.24	Pk	35.3	-21	0	59.54	-	-	68.2	-8.66	256	129	H
7	5.46998	34.03	RMS	35.3	-21	0.61	48.94	-	-	-	-	256	129	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

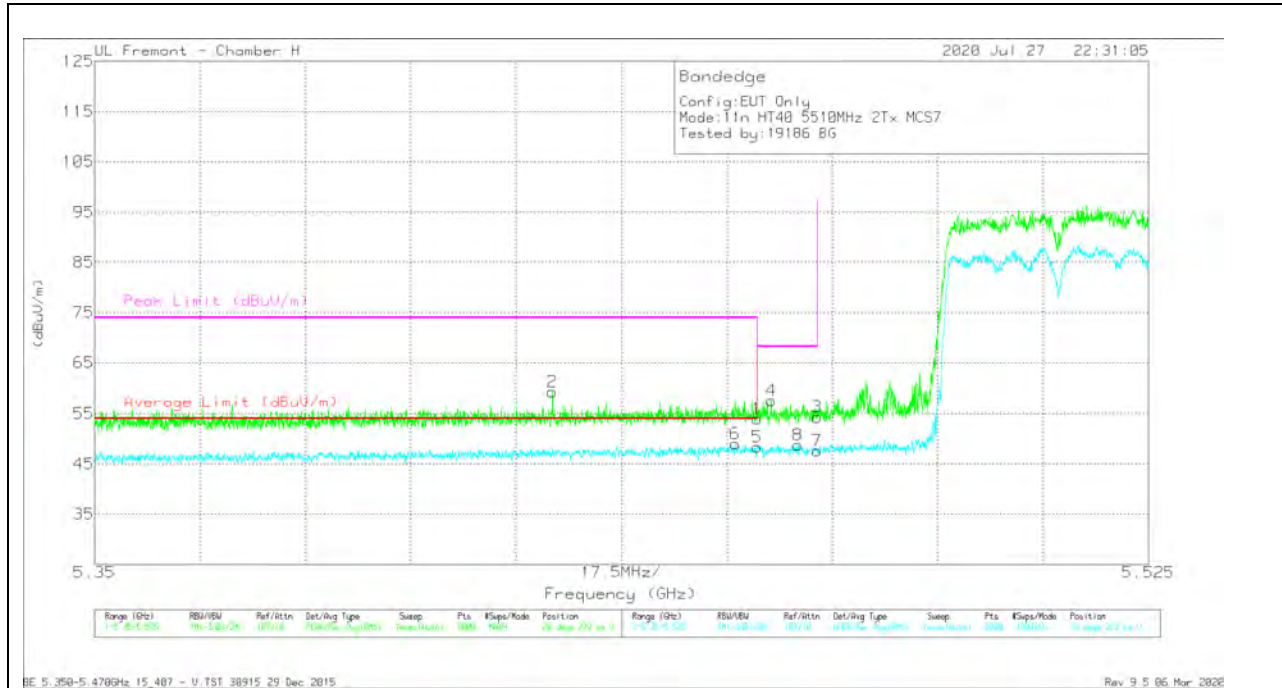


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1863 (dB/m)	Amp/CM/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.75	Pk	35.2	-20.9	0	54.05	-	-	74	-19.95	20	222	V
2	* 5.42605	45.07	Pk	35.1	-20.8	0	59.37	-	-	74	-14.63	20	222	V
5	* 5.45998	33.22	RMS	35.2	-20.9	0.61	48.13	54	-5.87	-	-	20	222	V
6	* 5.45637	33.73	RMS	35.3	-20.9	0.61	48.74	54	-5.26	-	-	20	222	V
4	5.46237	43.26	Pk	35.2	-20.9	0	57.56	-	-	68.2	-10.64	20	222	V
8	5.46681	33.5	RMS	35.3	-20.9	0.61	48.51	-	-	-	-	20	222	V
3	5.46998	40.01	Pk	35.3	-21	0	54.31	-	-	68.2	-13.89	20	222	V
7	5.46998	32.5	RMS	35.3	-21	0.61	47.41	-	-	-	-	20	222	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

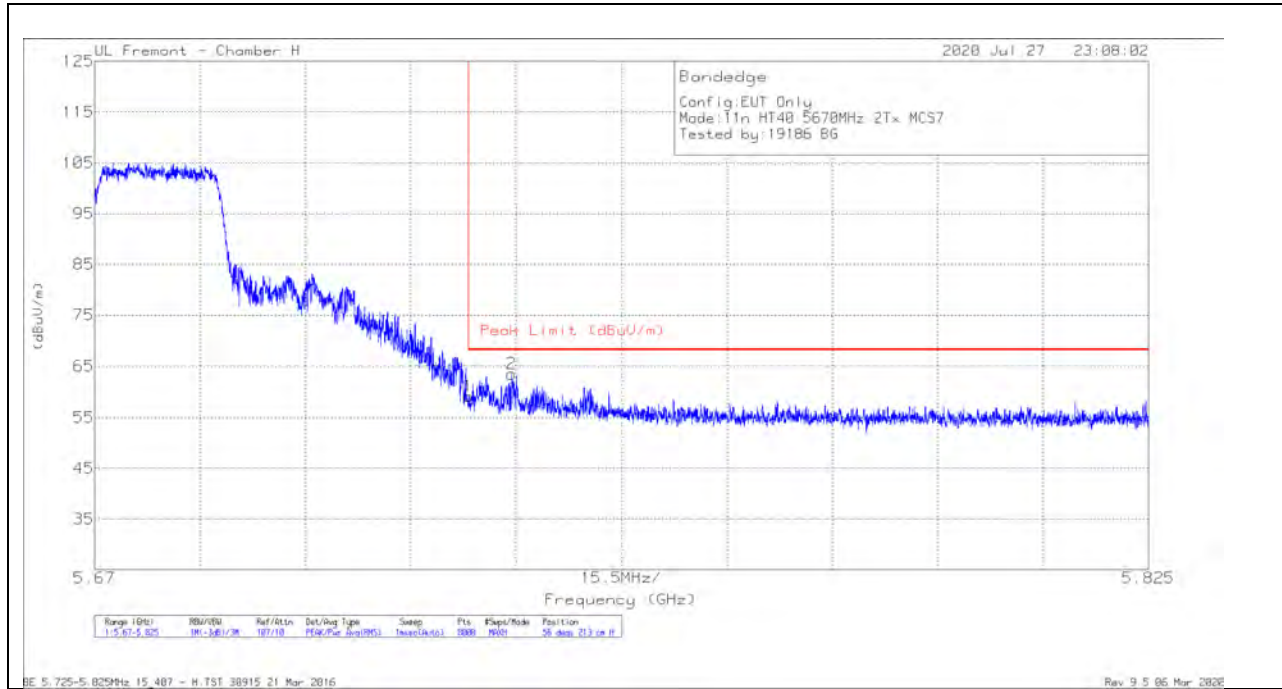

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.34	PK	35	-21.1	0	59.24	68.2	-8.96	56	213	H
2	5.73135	49.59	PK	35	-21.1	0	63.49	68.2	-4.71	56	213	H

Pk - Peak detector

VERTICAL RESULT

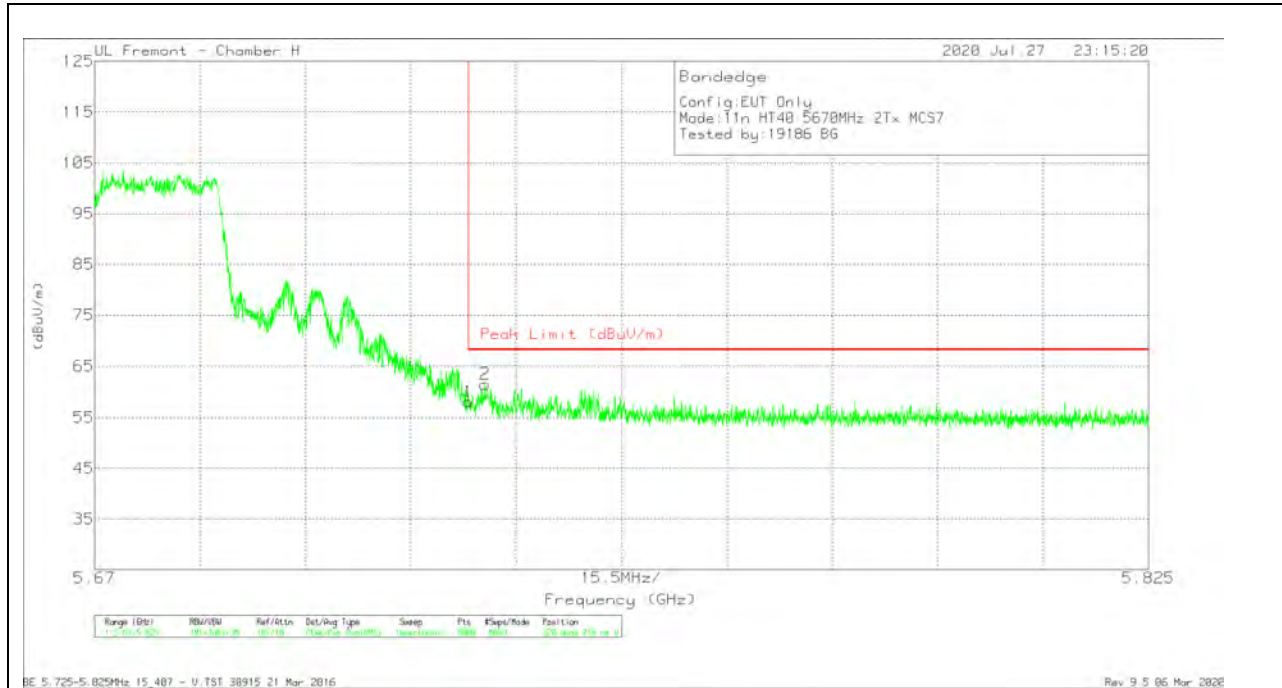


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	44.15	Pk	35	-21.1	0	58.05	68.2	-10.15	320	216	V
2	5.72741	47.69	Pk	34.9	-21.1	0	61.49	68.2	-6.71	320	216	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

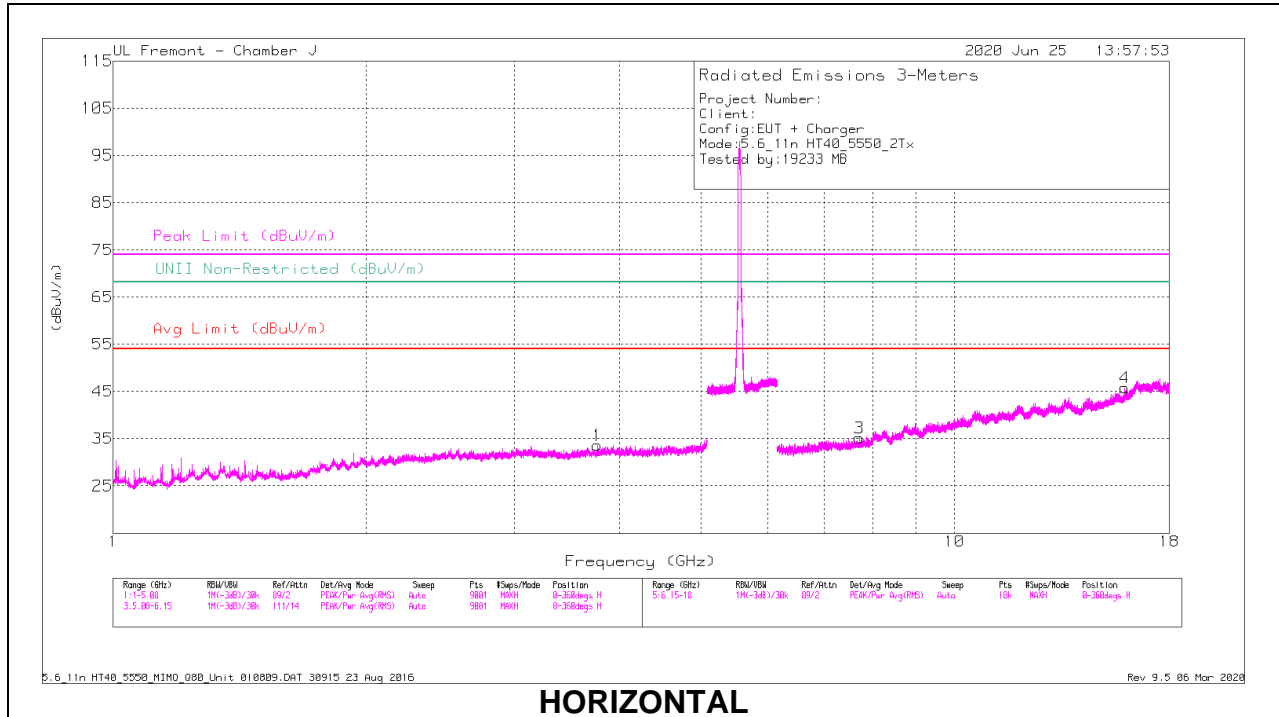

HORIZONTAL

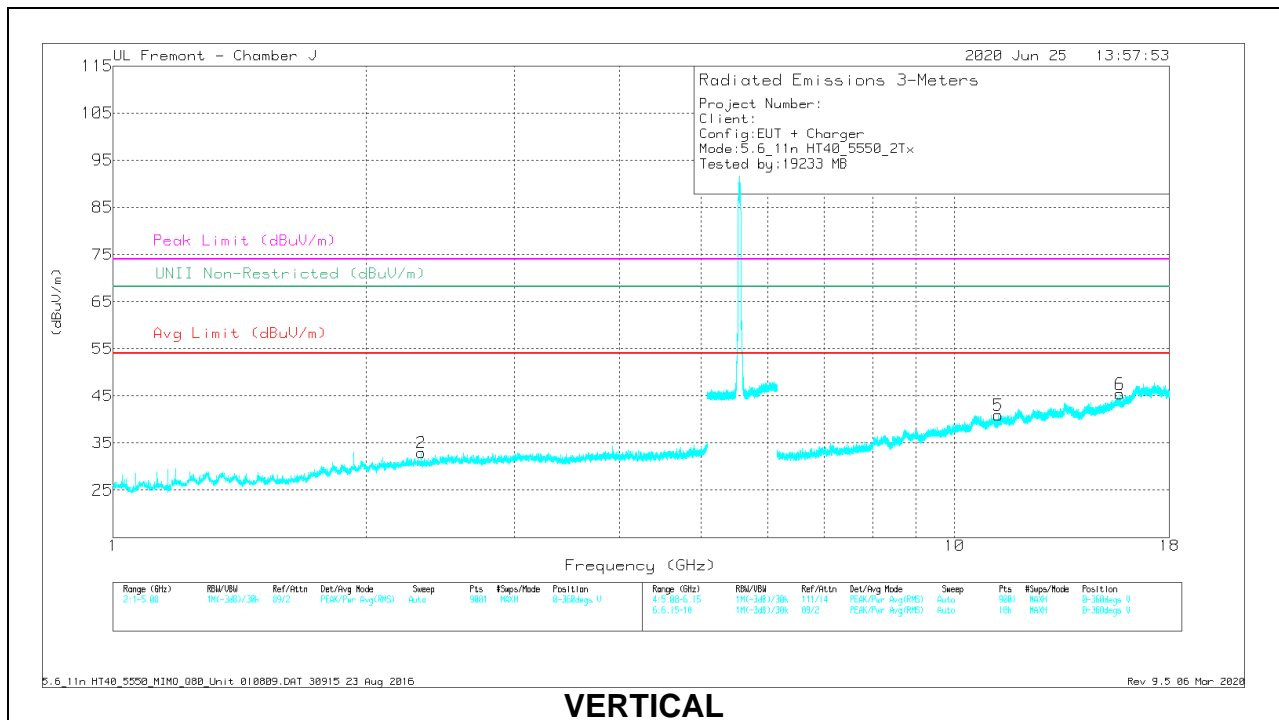

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Correct ed Reading (dBuV/ m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.76081	37.43	PK-U	33.4	-29	41.83	-	-	74	-32.17	-	-	264	364	H
	* 3.76232	28.01	ADR	33.4	-29.1	32.31	54	-21.69	-	-	-	-	264	364	H
2	* 2.32239	38.62	PK-U	31.7	-30.9	40.42	-	-	74	-33.58	-	-	38	345	V
	* 2.32221	28.17	ADR	31.7	-30.9	29.97	54	-24.03	-	-	-	-	38	345	V
3	* 7.70308	33.67	PK-U	35.7	-23.4	45.97	-	-	74	-28.03	-	-	203	350	H
	* 7.70078	22.9	ADR	35.8	-23.4	35.3	54	-18.7	-	-	-	-	203	350	H
4	* 15.92657	29.74	PK-U	41	-18.9	51.84	-	-	74	-22.16	-	-	32	338	H
	* 15.92371	19.5	ADR	41	-18.9	41.6	54	-12.4	-	-	-	-	32	338	H
5	* 11.27627	30.22	PK-U	38	-19.1	49.12	-	-	74	-24.88	-	-	246	345	V
	* 11.27442	20.15	ADR	38	-19.2	38.95	54	-15.05	-	-	-	-	246	345	V
6	* 15.71599	30.73	PK-U	40.8	-19.7	51.83	-	-	74	-22.17	-	-	151	195	V
	* 15.71667	20.4	ADR	40.8	-19.7	41.5	54	-12.5	-	-	-	-	151	195	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.1.15. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

1TX Antenna 5 MODE, MCS 9

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

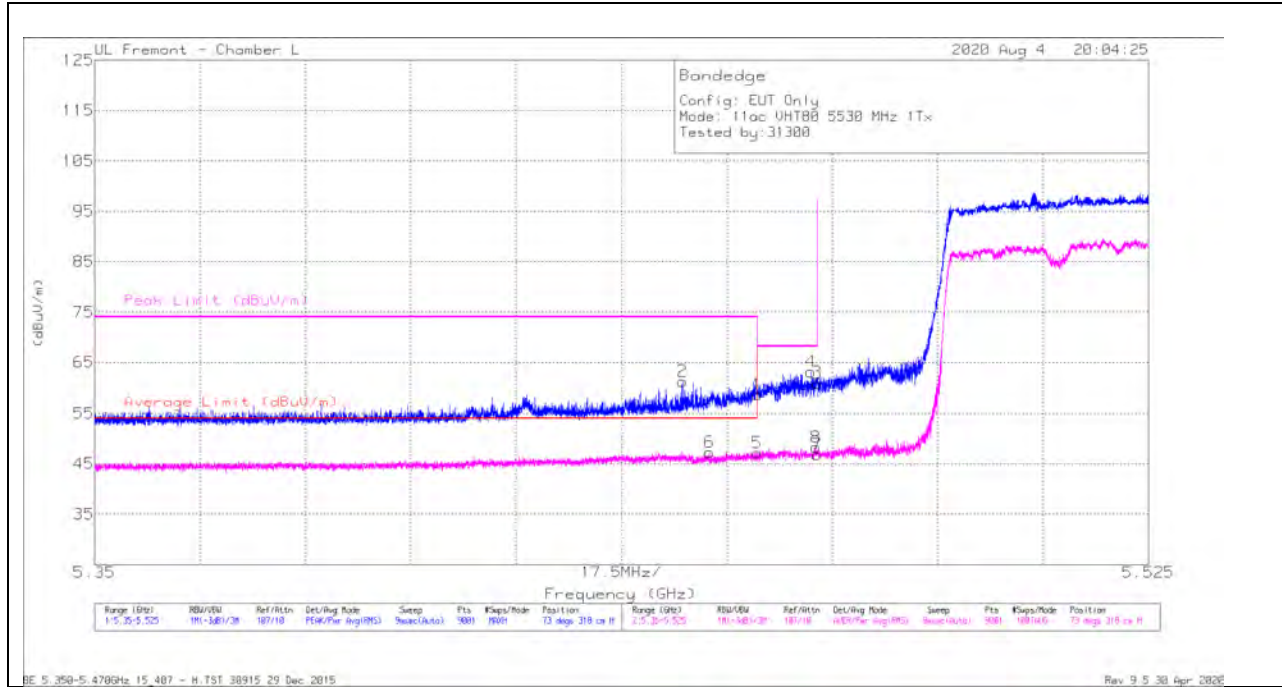

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Csh/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	40.98	Pk	34.6	-16.9	0	58.68	-	-	74	-15.32	73	318	H
2	* 5.44763	43.6	Pk	34.6	-16.9	0	61.3	-	-	74	-12.7	73	318	H
3	5.46999	43.33	Pk	34.6	-16.9	0	61.03	-	-	68.2	-7.17	73	318	H
4	5.46894	45.54	Pk	34.6	-16.9	0	63.24	-	-	68.2	-4.96	73	318	H
5	* 5.45999	28.44	RMS	34.6	-16.9	1.06	47.2	54	-6.8	-	-	73	318	H
6	* 5.45208	29.56	RMS	34.6	-16.9	1.06	47.32	54	-6.68	-	-	73	318	H
7	5.46999	28.09	RMS	34.6	-16.9	1.06	46.85	-	-	-	-	73	318	H
8	5.46976	29.48	RMS	34.6	-16.9	1.06	48.24	-	-	-	-	73	318	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

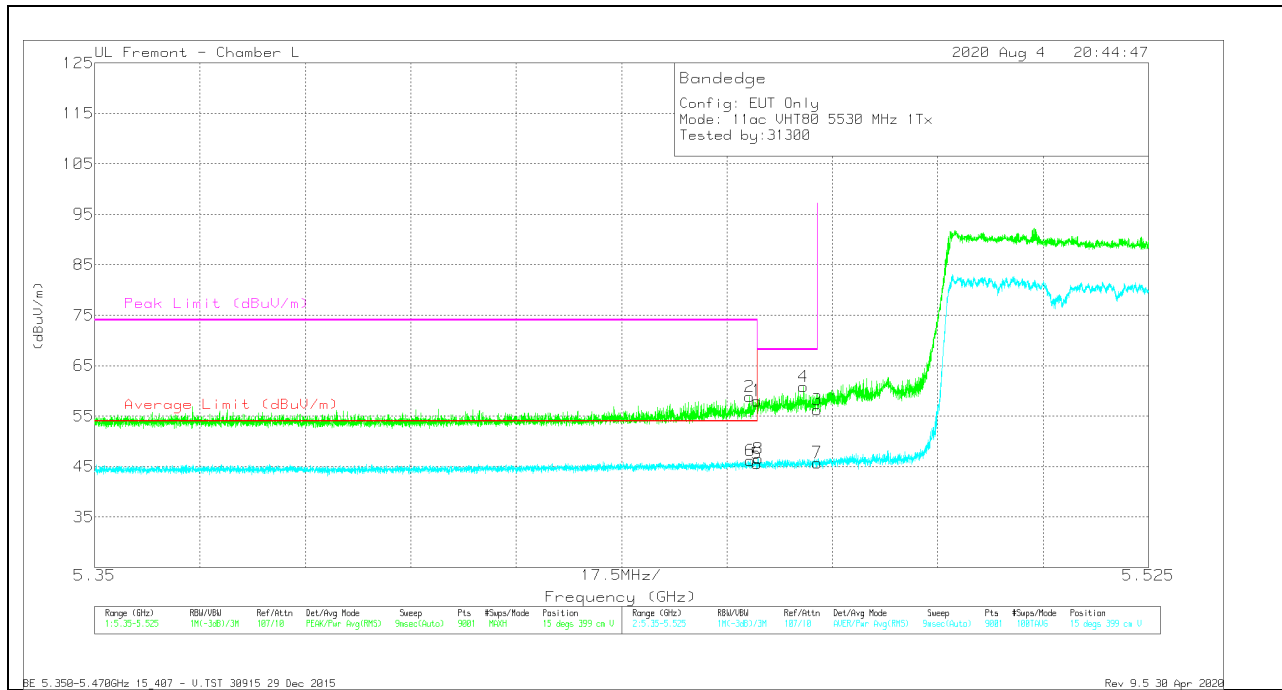


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/CbU/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	40.35	Pk	34.6	-16.9	0	58.05	-	-	74	-15.95	15	399	V
2	* 5.45873	41.2	Pk	34.6	-16.9	0	58.9	-	-	74	-15.1	15	399	V
3	5.46999	38.57	Pk	34.6	-16.9	0	56.27	-	-	68.2	-11.93	15	399	V
4	5.46773	43.1	Pk	34.6	-16.9	0	60.8	-	-	68.2	-7.4	15	399	V
5	* 5.45999	26.81	RMS	34.6	-16.9	1.06	45.57	54	-8.43	-	-	15	399	V
6	* 5.45885	27.38	RMS	34.6	-16.9	1.06	46.14	54	-7.86	-	-	15	399	V
7	5.46999	26.99	RMS	34.6	-16.9	1.06	45.75	-	-	-	-	15	399	V
8	5.46019	27.82	RMS	34.6	-16.9	1.06	46.58	-	-	-	-	15	399	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna 6 MODE, MCS 9

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

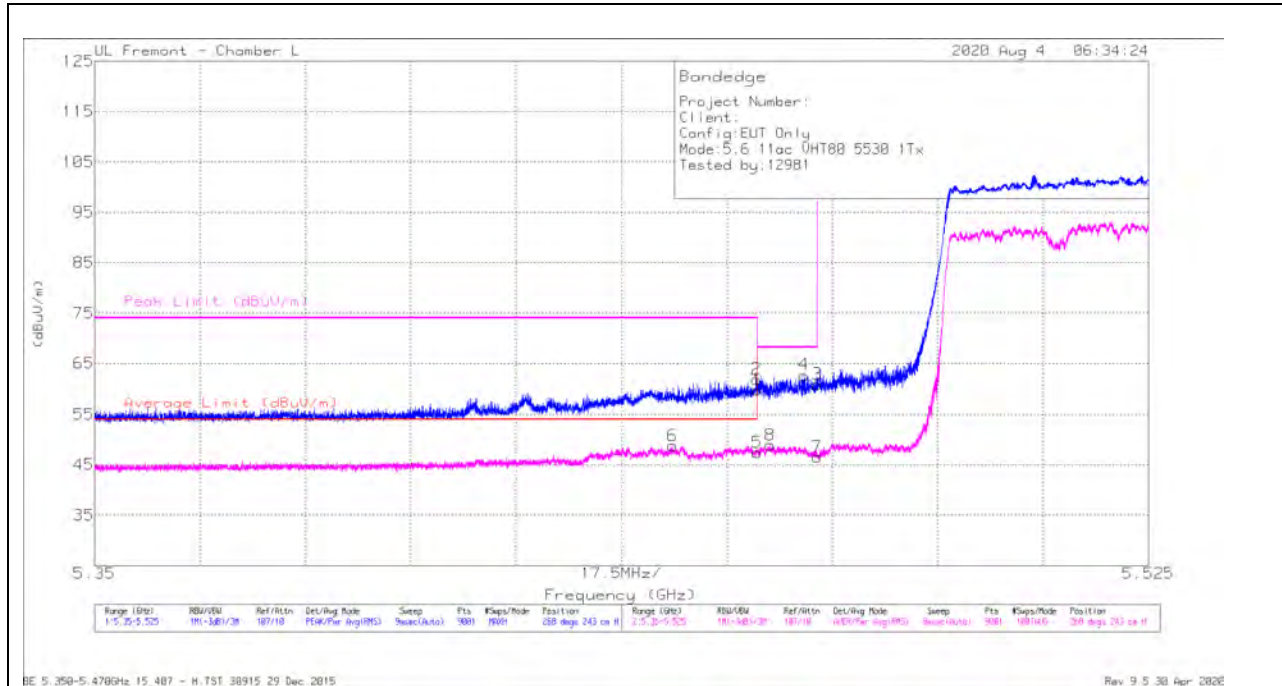

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	42.14	Pk	34.6	-16.9	0	59.84	-	-	74	-14.16	268	243	H
2	* 5.45994	44.26	Pk	34.6	-16.9	0	61.96	-	-	74	-12.04	268	243	H
3	5.46999	43.31	Pk	34.6	-16.9	0	61.01	-	-	68.2	-7.19	268	243	H
4	5.46779	45.07	Pk	34.6	-16.9	0	62.77	-	-	68.2	-5.43	268	243	H
5	* 5.45999	28.71	RMS	34.6	-16.9	1.06	47.47	54	-6.53	-	-	268	243	H
6	* 5.44592	30.07	RMS	34.6	-16.9	1.06	48.83	54	-5.17	-	-	268	243	H
7	5.46999	27.74	RMS	34.6	-16.9	1.06	46.50	-	-	-	-	268	243	H
8	5.46219	30.12	RMS	34.6	-16.9	1.06	48.88	-	-	-	-	268	243	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

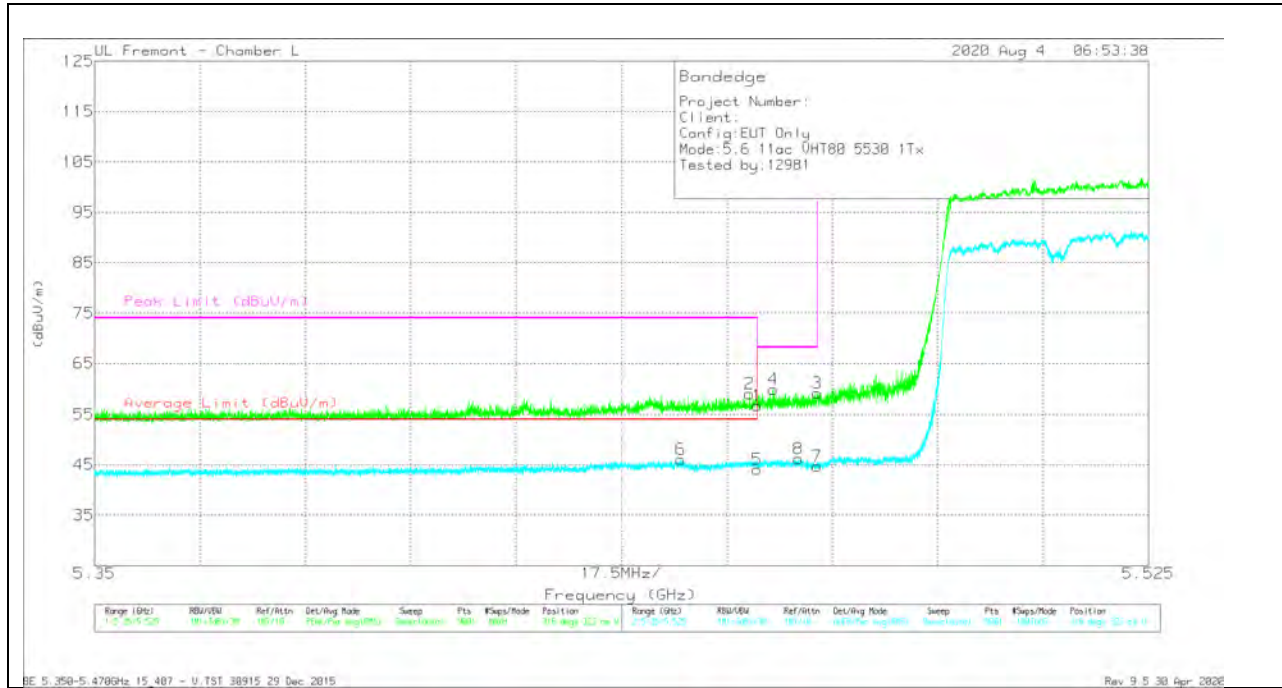


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/CbU/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	39.03	Pk	34.6	-16.9	0	56.73	-	-	74	-17.27	316	322	V
2	* 5.45873	41.38	Pk	34.6	-16.9	0	59.08	-	-	74	-14.92	316	322	V
3	5.46999	41.54	Pk	34.6	-16.9	0	59.24	-	-	68.2	-8.96	316	322	V
4	5.46206	42.24	Pk	34.6	-16.9	0	59.94	-	-	68.2	-8.26	316	322	V
5	* 5.45999	26.43	RMS	34.6	-16.9	1.06	45.19	54	-8.81	-	-	316	322	V
6	* 5.44732	28.35	RMS	34.6	-16.9	1.06	47.11	54	-8.89	-	-	316	322	V
7	5.46999	26.98	RMS	34.6	-16.9	1.06	46.74	-	-	-	-	316	322	V
8	5.46682	28.49	RMS	34.6	-16.9	1.06	47.25	-	-	-	-	316	322	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 5 + Antenna 6 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

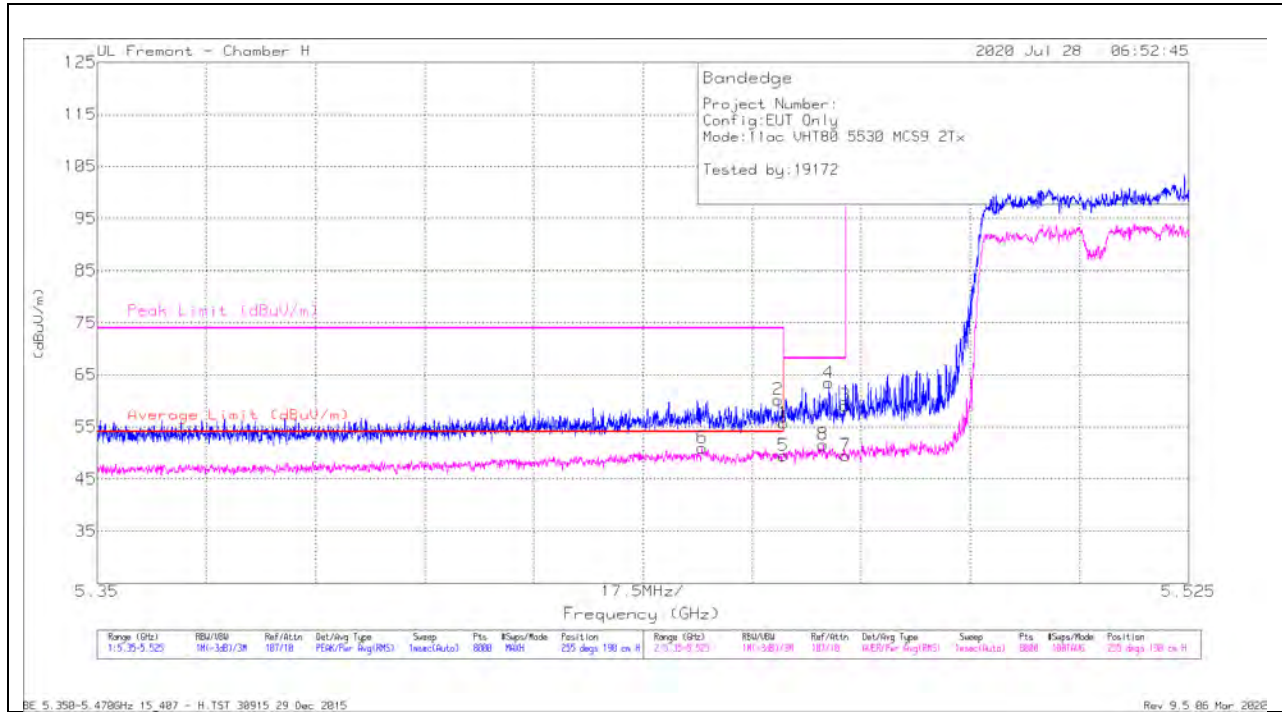

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarizy
1	* 5.45998	41.41	Pk	35.2	-20.9	0	55.71	-	-	74	-18.29	255	190	H
2	* 5.45917	45.84	Pk	35.3	-20.9	0	60.24	-	-	74	-13.76	255	190	H
5	* 5.45998	33.9	RMS	35.2	-20.9	1.29	49.49	54	-4.51	-	-	255	190	H
6	* 5.44699	35.46	RMS	35.1	-20.8	1.29	51.05	54	-2.95	-	-	255	190	H
8	5.48639	38.05	RMS	35.2	-20.9	0	51.64	-	-	-	-	255	190	H
4	5.46731	49.07	Pk	35.3	-20.9	0	63.47	-	-	68.2	-4.73	255	190	H
3	5.46998	44.83	Pk	35.3	-21	0	59.13	-	-	68.2	-9.07	255	190	H
7	5.46998	33.93	RMS	35.3	-21	1.29	49.52	-	-	-	-	255	190	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

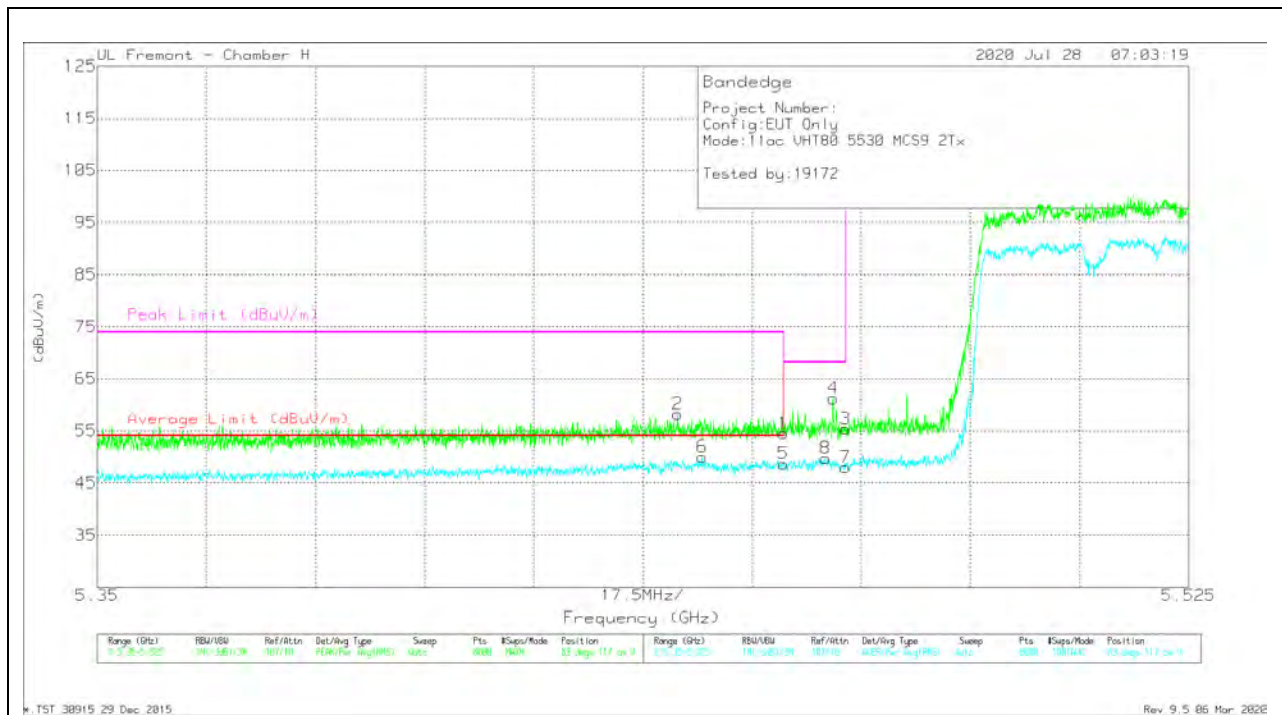


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T63 (dBm)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.45998	40.24	PK	35.2	-20.9	0	54.54	-	-	74	-19.46	83	117	V
2	*5.44303	44.07	PK	35.1	-20.9	0	58.27	-	-	74	-15.73	83	117	V
5	*5.45998	33.11	RMS	35.2	-20.9	1.29	48.7	54	-5.3	-	-	83	117	V
6	*5.44699	34.41	RMS	35.1	-20.8	1.29	50	54	-4	-	-	83	117	V
8	5.46674	34.21	RMS	35.2	-20.9	1.29	49.8	-	-	-	-	83	117	V
4	5.46797	46.86	PK	35.3	-20.9	0	61.26	-	-	68.2	-6.94	83	117	V
3	5.46998	41.09	PK	35.3	-21	0	55.39	-	-	68.2	-12.81	83	117	V
7	5.46998	32.38	RMS	35.3	-21	1.29	47.97	-	-	-	-	83	117	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

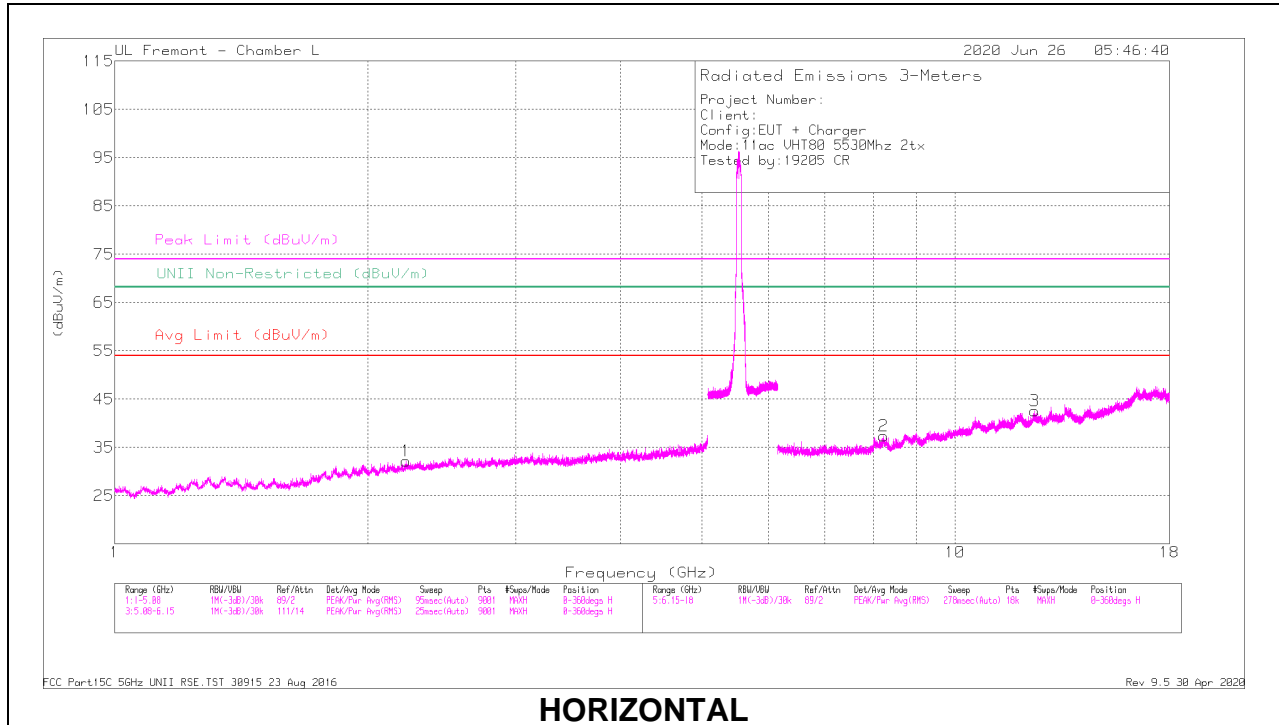

HORIZONTAL

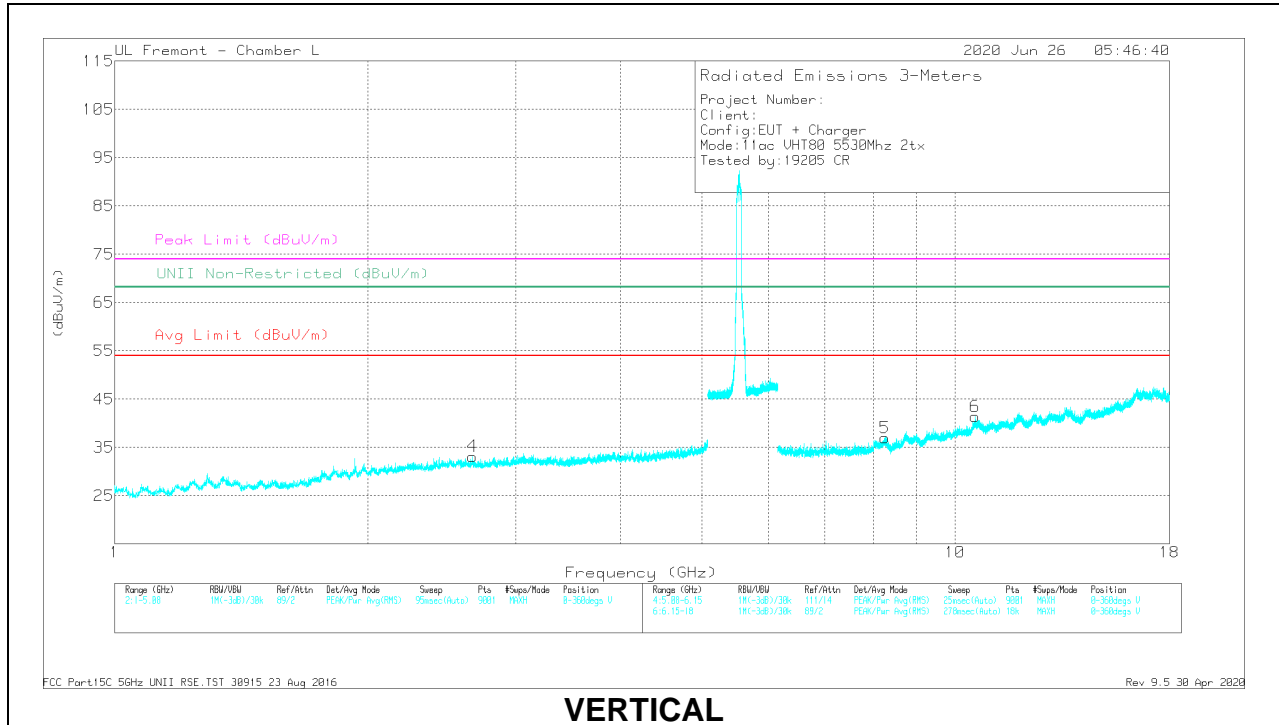

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.22111	40.05	PK-U	31.7	-31.3	0	40.45	-	-	74	-33.55	-	-	338	331	H
	* 2.2225	29.64	ADR	31.7	-31.3	19	30.23	54	-23.77	74	-	-	-	338	331	H
4	* 2.66355	38.25	PK-U	32.4	-30.3	0	41.35	-	-	74	-32.65	-	-	0	380	V
	* 2.66355	28.84	ADR	32.4	-30.3	19	31.13	54	-22.87	-	-	-	-	0	380	V
2	* 8.22757	31.93	PK-U	35.8	-21.5	0	46.23	-	-	74	-27.77	-	-	294	352	H
	* 8.22361	22.08	ADR	35.8	-21.5	19	36.47	54	-17.53	-	-	-	-	294	352	H
3	* 12.45248	30.85	PK-U	39	-19.6	0	50.25	-	-	74	-23.75	-	-	226	353	H
	* 12.45165	20.52	ADR	39	-19.6	19	40.11	54	-13.89	-	-	-	-	226	353	H
5	* 8.25325	32.4	PK-U	35.8	-21.5	0	46.7	-	-	74	-27.3	-	-	94	355	V
	* 8.25442	21.99	ADR	35.8	-21.5	19	36.48	54	-17.52	-	-	-	-	94	355	V
6	10.56861	30.98	PK-U	37.9	-19.3	0	49.58	-	-	-	-	68.2	-18.62	93	353	V
	10.57049	21.26	ADR	37.9	-19.4	19	39.95	-	-	-	-	-	-	93	353	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.1.16. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.6 GHz BAND

1TX Antenna 5 MODE – 242 Tones, RU Index 61

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

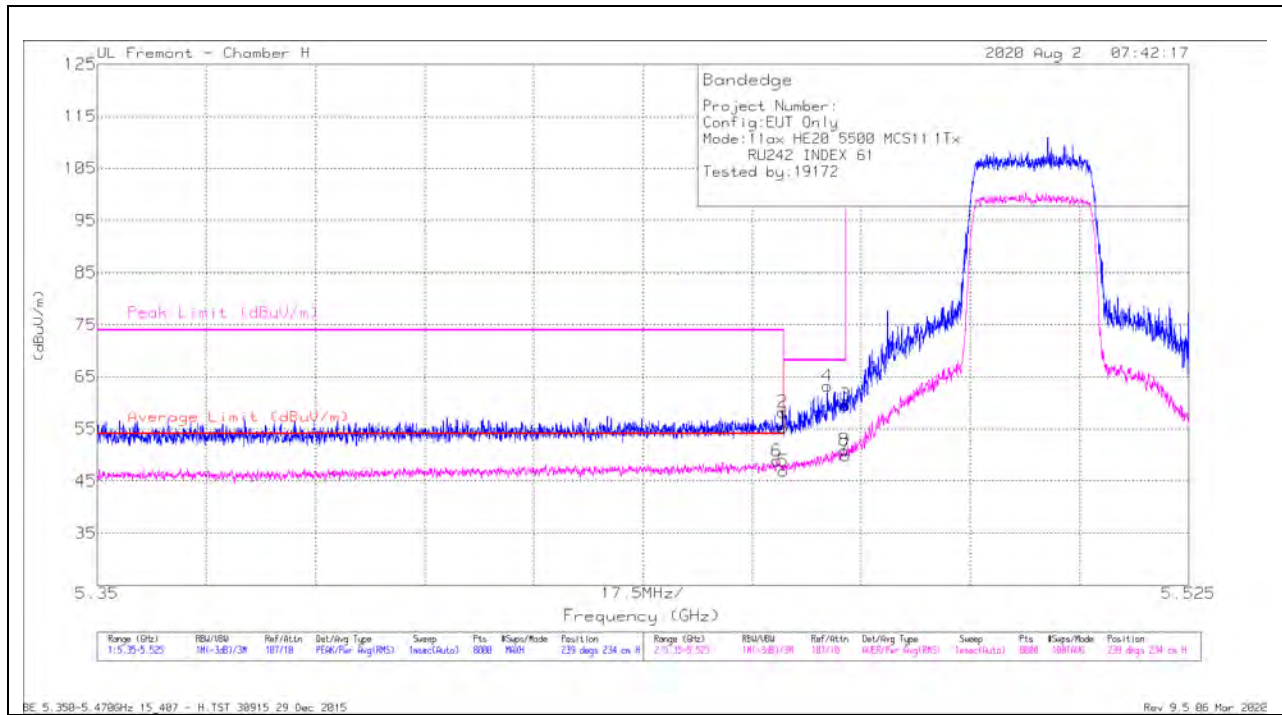

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.93	Pk	35.2	-20.9	0	55.23	-	-	74	-18.77	239	234	H
2	* 5.45994	43.89	Pk	35.2	-20.9	0	58.19	-	-	74	-15.81	239	234	H
5	* 5.45998	32.14	RMS	35.2	-20.9	0	46.44	54	-7.56	-	-	239	234	H
6	* 5.45893	34.02	RMS	35.3	-20.9	0	48.42	54	-5.58	-	-	239	234	H
4	5.46705	48.77	Pk	35.3	-20.9	0	63.17	-	-	68.2	-5.03	239	234	H
8	5.4698	36.12	RMS	35.3	-21	0	50.42	-	-	-	-	239	234	H
3	5.46998	45.34	Pk	35.3	-21	0	59.64	-	-	68.2	-8.56	239	234	H
7	5.46998	35.1	RMS	35.3	-21	0	49.4	-	-	-	-	239	234	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

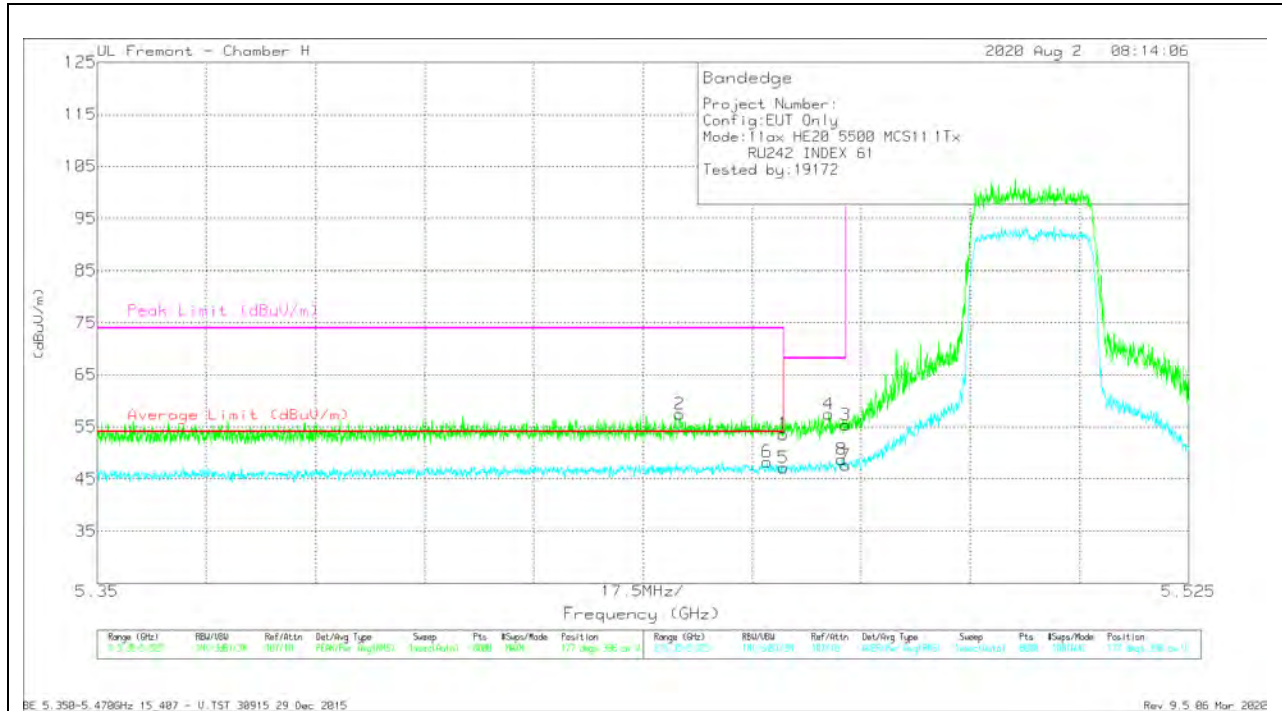


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarizy
1	* 5.45998	39.27	Pk	35.2	-20.9	0	53.57	-	-	74	-20.43	177	398	V
2	* 5.44335	43.13	Pk	35.1	-20.8	0	57.43	-	-	74	-16.57	177	398	V
5	* 5.45998	32.37	RMS	35.2	-20.9	0	46.67	54	-7.33	-	-	177	398	V
6	* 5.45738	33.46	RMS	35.3	-20.9	0	47.86	54	-6.14	-	-	177	398	V
4	5.46731	43.11	Pk	35.3	-20.9	0	57.51	-	-	68.2	-10.69	177	398	V
8	5.46939	34.03	RMS	35.3	-21	0	48.33	-	-	-	-	177	398	V
3	5.46998	41.06	Pk	35.3	-21	0	55.36	-	-	68.2	-12.84	177	398	V
7	5.46998	32.84	RMS	35.3	-21	0	47.14	-	-	-	-	177	398	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna 5 MODE – 242 Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

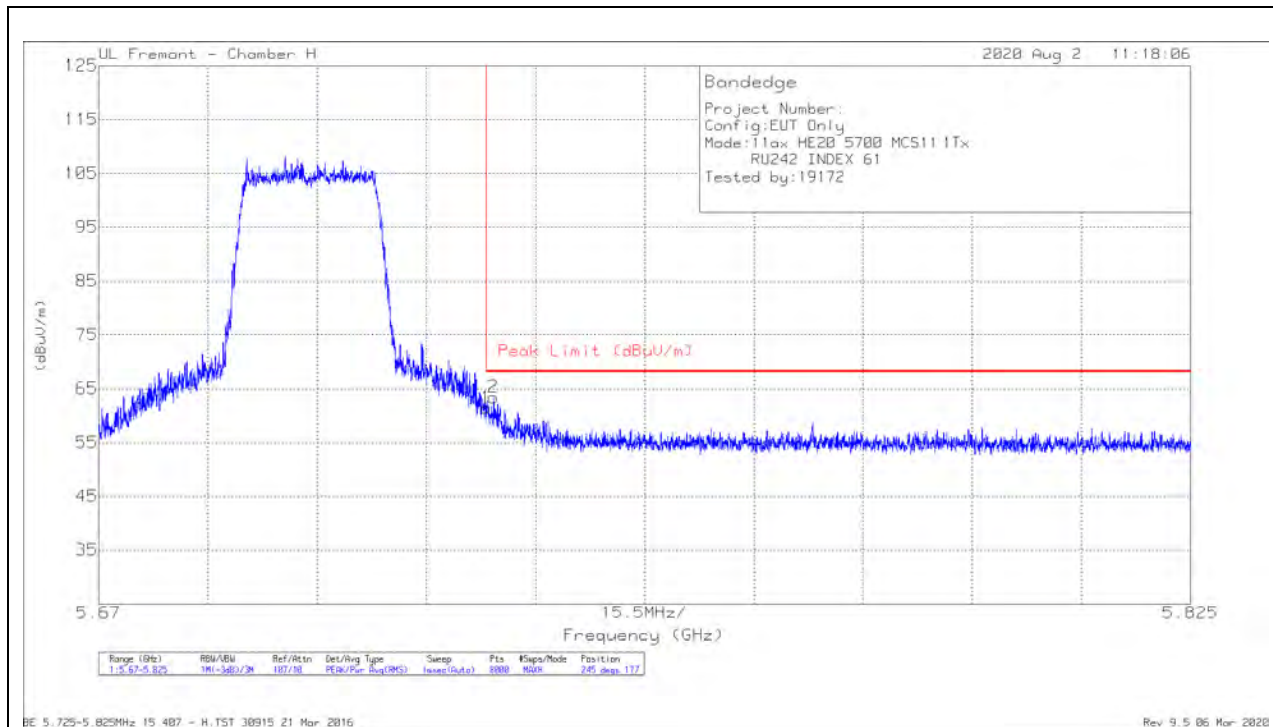

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.49	Pk	35	-21.1	0	61.39	68.2	-6.81	245	177	H
2	5.72604	49.59	Pk	34.9	-21.1	0	63.39	68.2	-4.81	245	177	H

Pk - Peak detector

VERTICAL RESULT

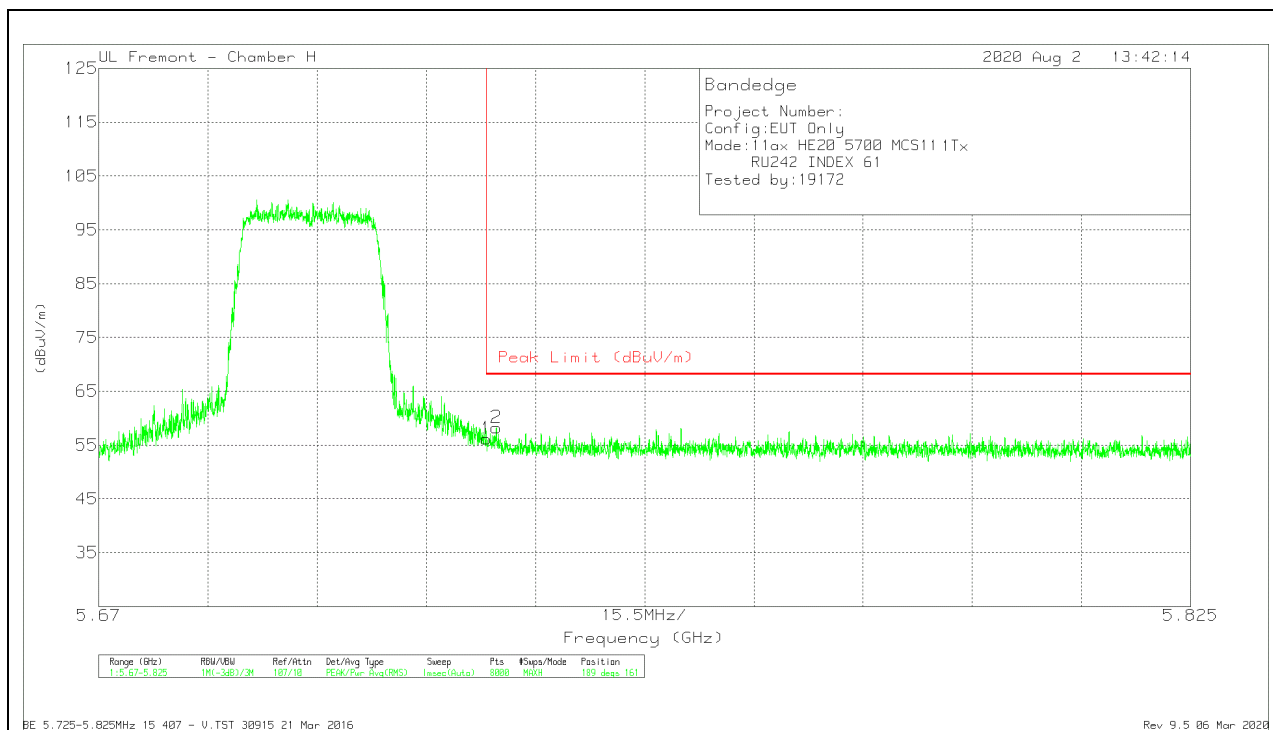


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	42.28	Pk	35	-21.1	0	56.18	68.2	-12.02	189	161	V
2	5.72645	44.44	Pk	34.9	-21.1	0	58.24	68.2	-9.96	189	161	V

Pk - Peak detector

1TX Antenna 5 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

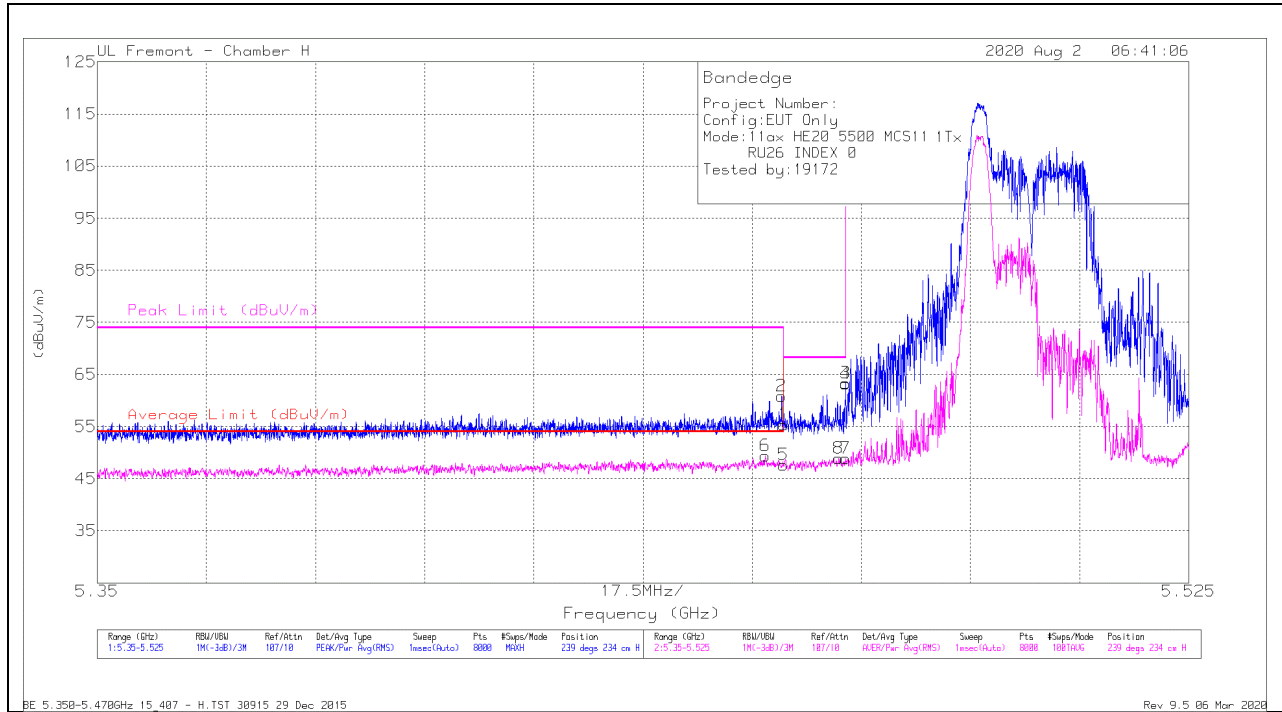

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.13	Pk	35.2	-20.9	0	55.43	-	-	74	-18.57	239	234	H
2	* 5.45974	46.58	Pk	35.2	-20.9	0	60.88	-	-	74	-13.12	239	234	H
5	* 5.45988	32.84	RMS	35.2	-20.9	0	47.14	54	-6.86	-	-	239	234	H
6	* 5.45709	34.56	RMS	35.3	-20.9	0	48.96	54	-5.04	-	-	239	234	H
8	5.46889	34.16	RMS	35.3	-21	0	48.46	-	-	-	-	239	234	H
4	5.46996	48.88	Pk	35.3	-21	0	63.18	-	-	68.2	-5.02	239	234	H
3	5.46998	49.09	Pk	35.3	-21	0	63.39	-	-	68.2	-4.81	239	234	H
7	5.46998	34.08	RMS	35.3	-21	0	48.38	-	-	-	-	239	234	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

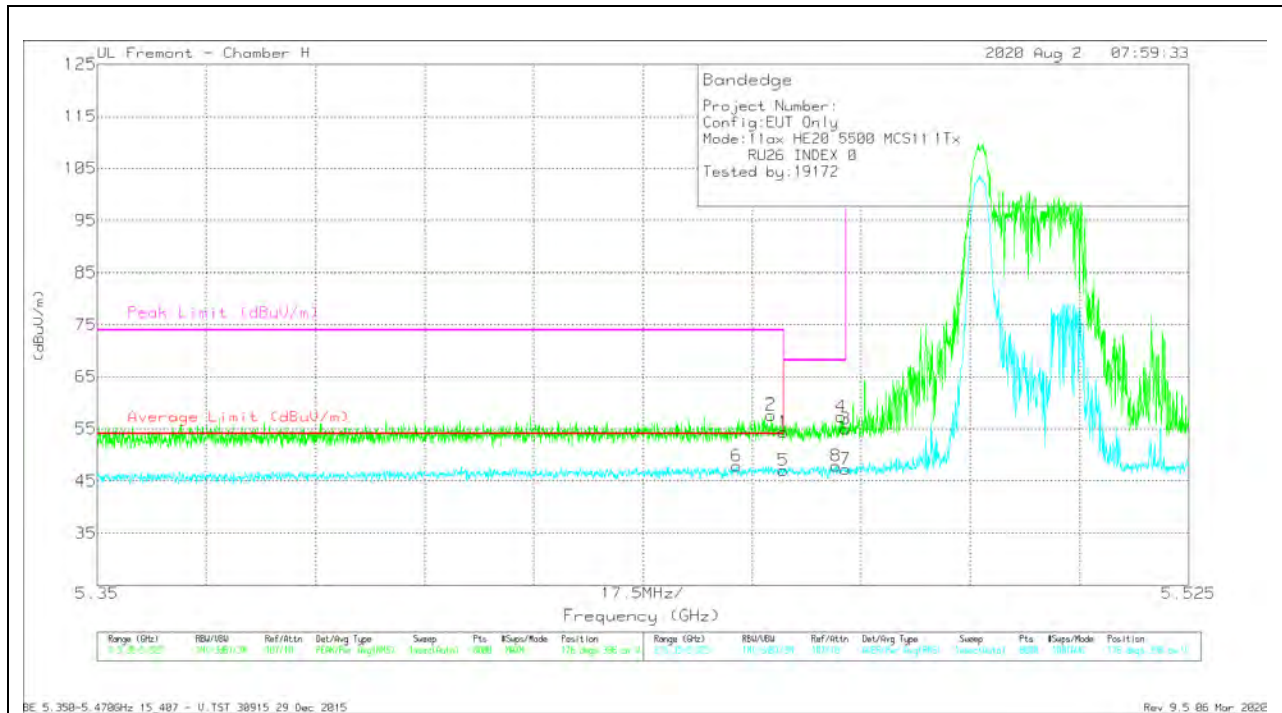


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.45998	40.05	PK	35.2	-20.9	0	54.25	-	-	74	-19.65	176	398	V
2	*5.45803	43.27	PK	35.3	-20.9	0	57.67	-	-	74	-16.33	176	398	V
5	*5.45998	32.24	RMS	35.2	-20.9	0	46.54	54	-7.46	-	-	176	398	V
6	*5.45254	33.17	RMS	35.2	-20.9	0	47.47	54	-6.53	-	-	176	398	V
8	5.46847	33.13	RMS	35.3	-21	0	47.43	-	-	-	-	176	398	V
4	5.46924	43.01	PK	35.3	-21	0	57.31	-	-	68.2	-10.89	176	398	V
3	5.46998	40.69	PK	35.3	-21	0	54.99	-	-	68.2	-13.21	176	398	V
7	5.46998	32.46	RMS	35.3	-21	0	46.76	-	-	-	-	176	398	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

1TX Antenna 5 MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

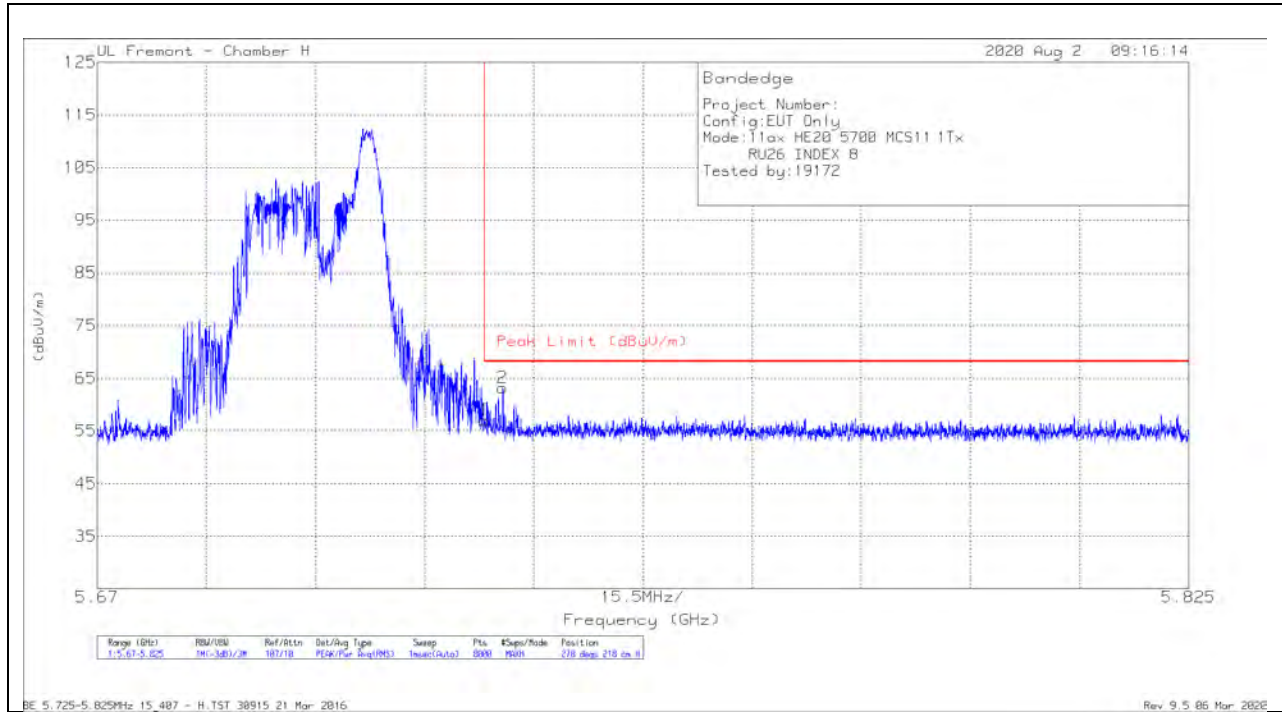

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	43.06	Pk	35	-21.1	0	56.96	68.2	-11.24	278	218	H
2	5.72759	49.39	Pk	34.9	-21.1	0	63.19	68.2	-5.01	278	218	H

Pk - Peak detector

VERTICAL RESULT

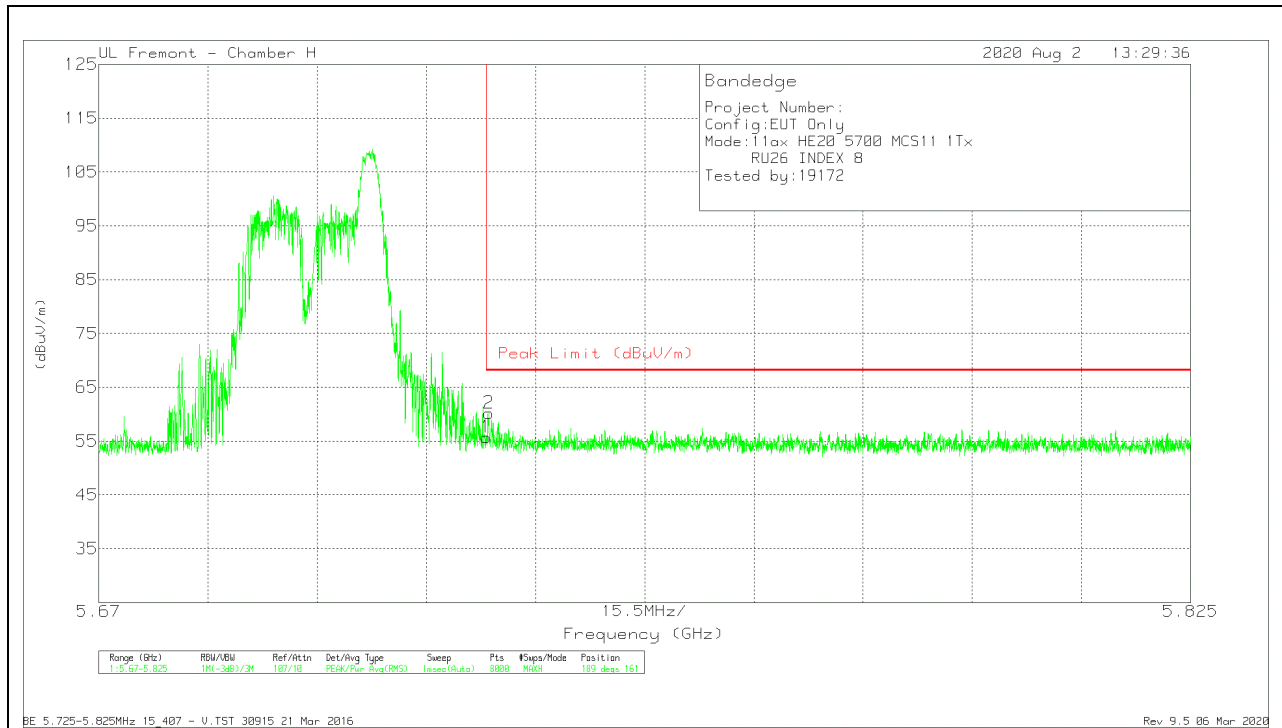


Pk - Peak detector

1TX Antenna 6 MODE – 242 Tones, RU Index 61

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

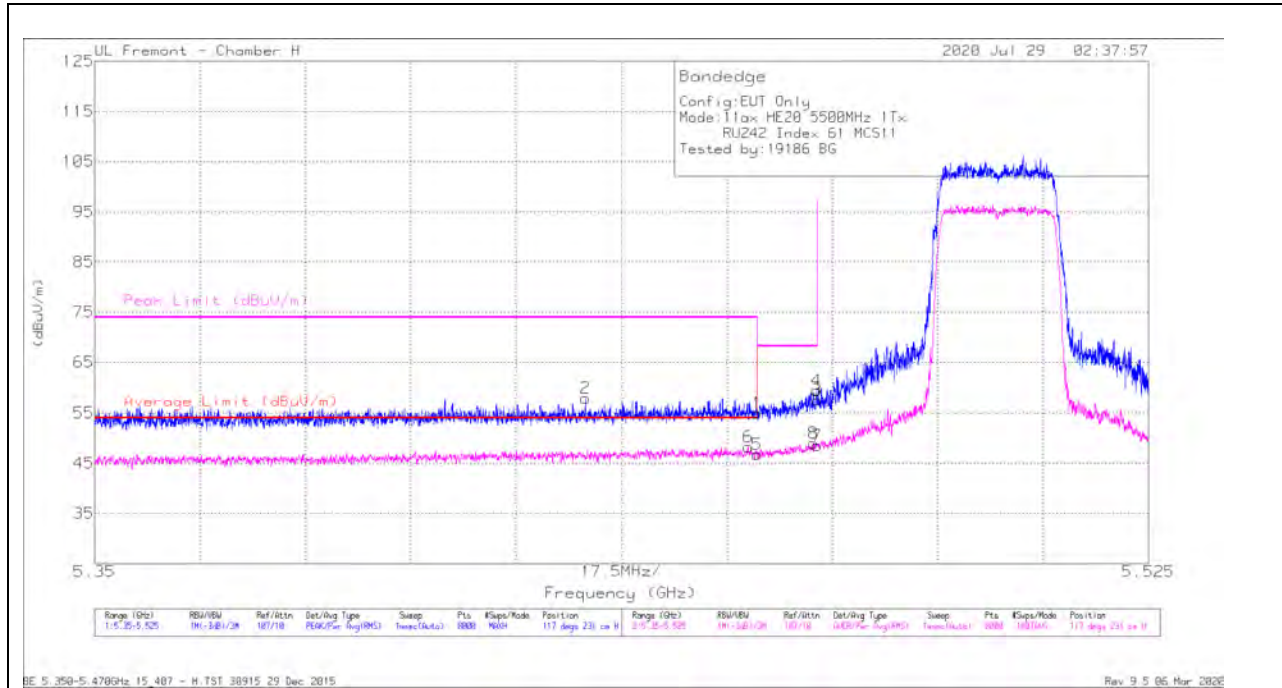

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Paid (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.75	Pk	35.2	-20.9	55.05	-	-	74	-18.95	117	231	H
2	* 5.43152	43.85	Pk	35	-20.9	57.95	-	-	74	-16.05	117	231	H
5	* 5.45998	32.82	RMS	35.2	-20.9	46.82	54	-7.18	-	-	117	231	H
6	* 5.45851	33.83	RMS	35.3	-20.9	48.23	54	-5.77	-	-	117	231	H
8	5.46932	34.73	RMS	35.3	-21	49.03	-	-	-	-	117	231	H
4	5.46989	45.15	Pk	35.3	-21	59.45	-	-	68.2	-8.75	117	231	H
3	5.46998	43.35	Pk	35.3	-21	57.65	-	-	68.2	-10.55	117	231	H
7	5.46998	34.26	RMS	35.3	-21	48.56	-	-	-	-	117	231	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

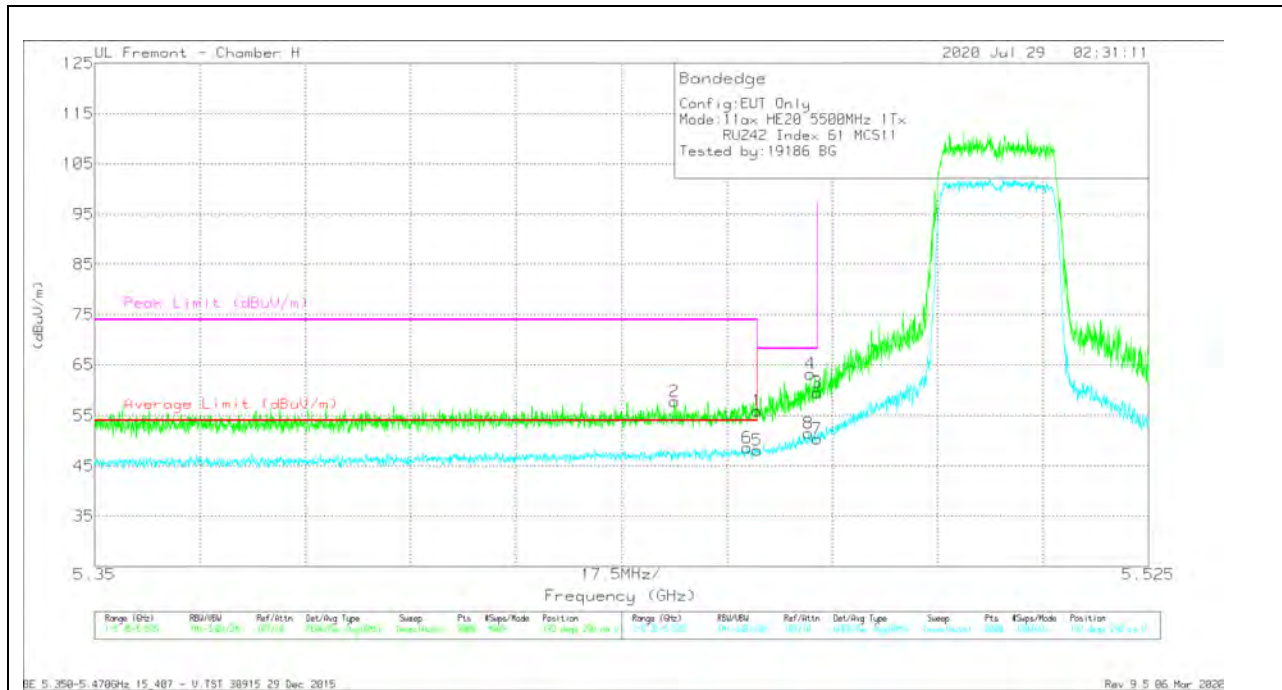


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.73	Pk	35.2	-20.9	56.03	-	-	74	-17.97	192	290	V
2	* 5.44624	43.57	Pk	35.1	-20.8	57.87	-	-	74	-16.13	192	290	V
5	* 5.45998	33.78	RMS	35.2	-20.9	48.08	54	-5.92	-	-	192	290	V
6	* 5.45832	34.26	RMS	35.3	-20.9	48.66	54	-5.34	-	-	192	290	V
8	5.46854	37.21	RMS	35.3	-21	51.51	-	-	-	-	192	290	V
4	5.46884	48.88	Pk	35.3	-21	63.18	-	-	68.2	-5.02	192	290	V
3	5.46998	45.29	Pk	35.3	-21	59.59	-	-	68.2	-8.61	192	290	V
7	5.46998	36.12	RMS	35.3	-21	50.42	-	-	-	-	192	290	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna 6 MODE – 242 Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

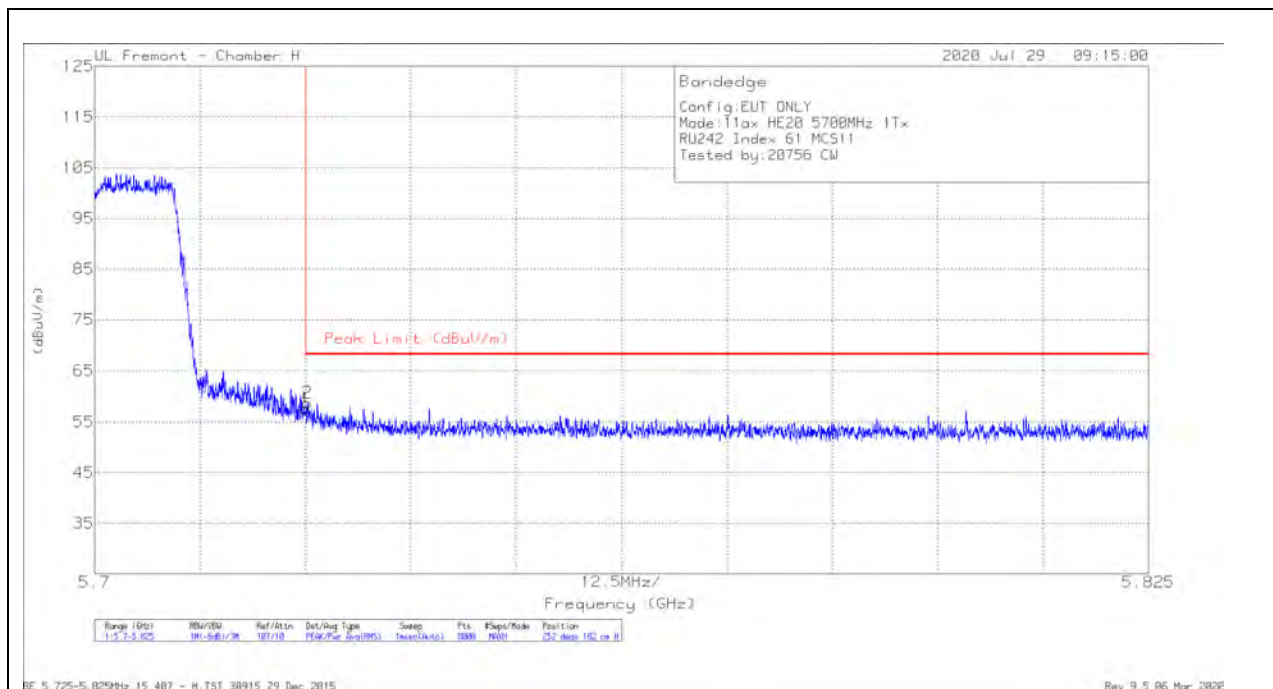

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.82	Pk	35	-21.1	57.72	68.2	-10.48	252	182	H
2	5.72527	44.87	Pk	35	-21.1	58.77	68.2	-9.43	252	182	H

Pk - Peak detector

VERTICAL RESULT

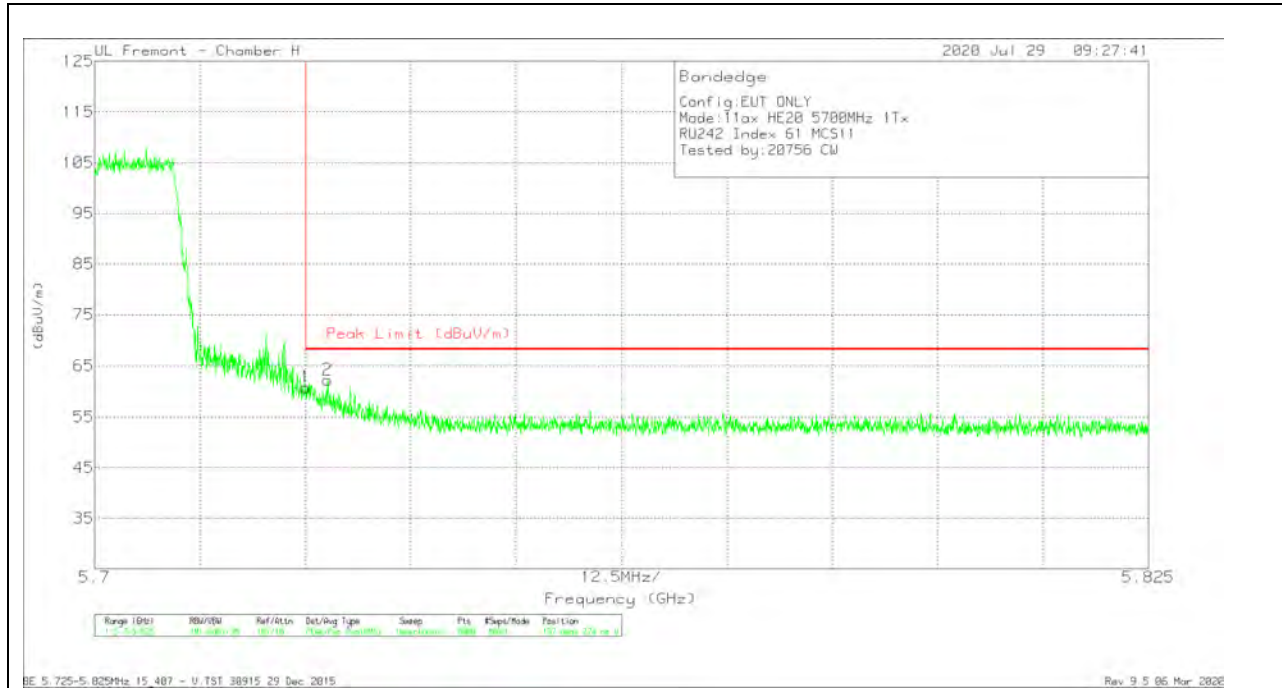


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.93	Pk	35	-21.1	60.83	68.2	-7.37	197	274	V
2	5.72764	48.54	Pk	34.9	-21.1	62.34	68.2	-5.86	197	274	V

Pk - Peak detector

1TX Antenna 6 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

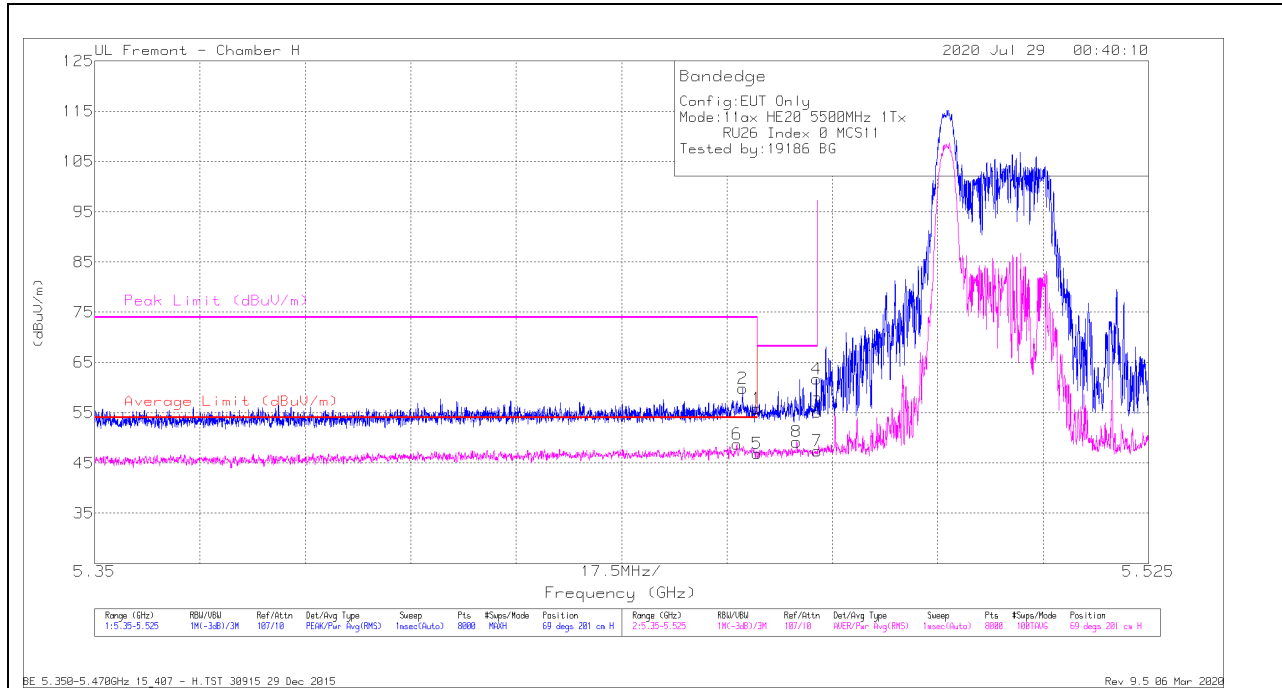

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Paid (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.59	Pk	35.2	-20.9	55.89	-	-	74	-18.11	69	201	H
2	* 5.45762	45.45	Pk	35.3	-20.9	59.85	-	-	74	-14.15	69	201	H
5	* 5.45998	32.54	RMS	35.2	-20.9	46.84	54	-7.16	-	-	69	201	H
6	* 5.45666	34.41	RMS	35.3	-20.9	48.81	54	-5.19	-	-	69	201	H
8	5.46659	34.9	RMS	35.2	-20.9	49.2	-	-	-	-	69	201	H
4	5.46985	47.46	Pk	35.3	-21	61.76	-	-	68.2	-6.44	69	201	H
3	5.46998	40.82	Pk	35.3	-21	55.12	-	-	68.2	-13.08	69	201	H
7	5.46998	33.05	RMS	35.3	-21	47.35	-	-	-	-	69	201	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

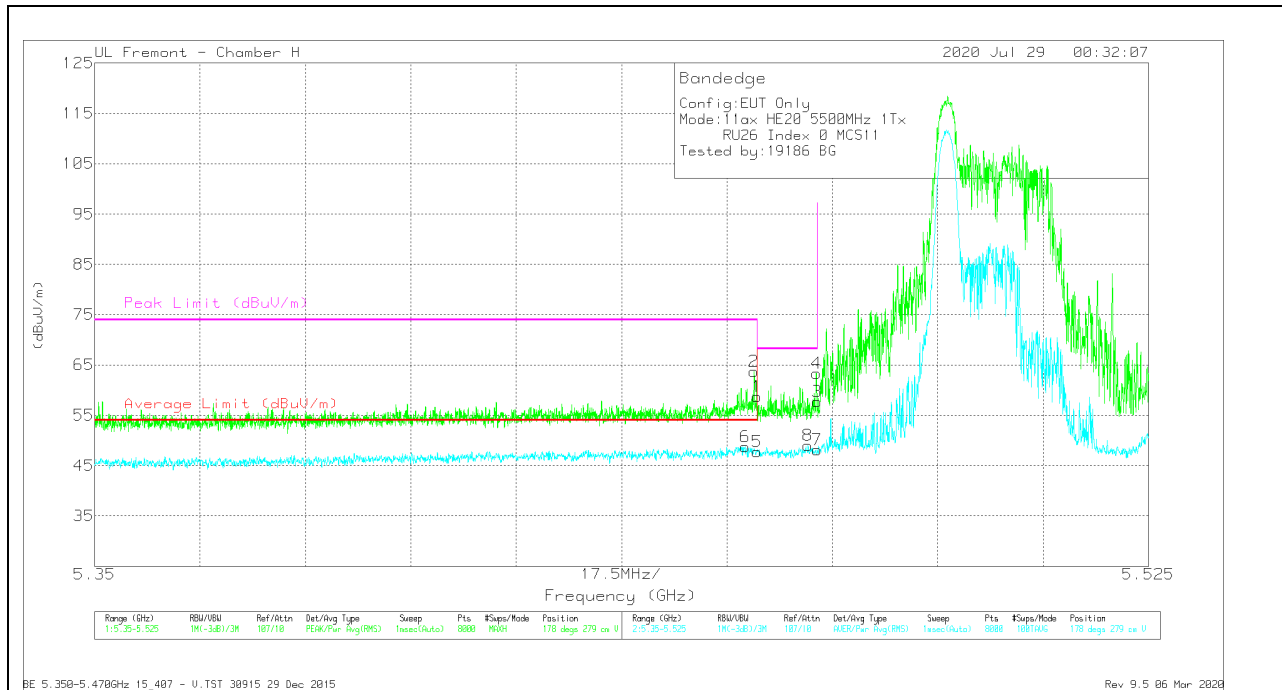


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	44.42	Pk	35.2	-20.9	58.72	-	-	74	-15.28	178	279	V
2	* 5.4595	49.36	Pk	35.2	-20.9	63.66	-	-	74	-10.34	178	279	V
5	* 5.45998	33.48	RMS	35.2	-20.9	47.78	54	-6.22	-	-	178	279	V
6	* 5.45799	34.39	RMS	35.3	-20.9	48.79	54	-5.21	-	-	178	279	V
8	5.46847	34.68	RMS	35.3	-21	48.98	-	-	-	-	178	279	V
4	5.46985	49.08	Pk	35.3	-21	63.38	-	-	68.2	-4.82	178	279	V
3	5.46998	43.44	Pk	35.3	-21	57.74	-	-	68.2	-10.46	178	279	V
7	5.46998	33.87	RMS	35.3	-21	48.17	-	-	-	-	178	279	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna 6 MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

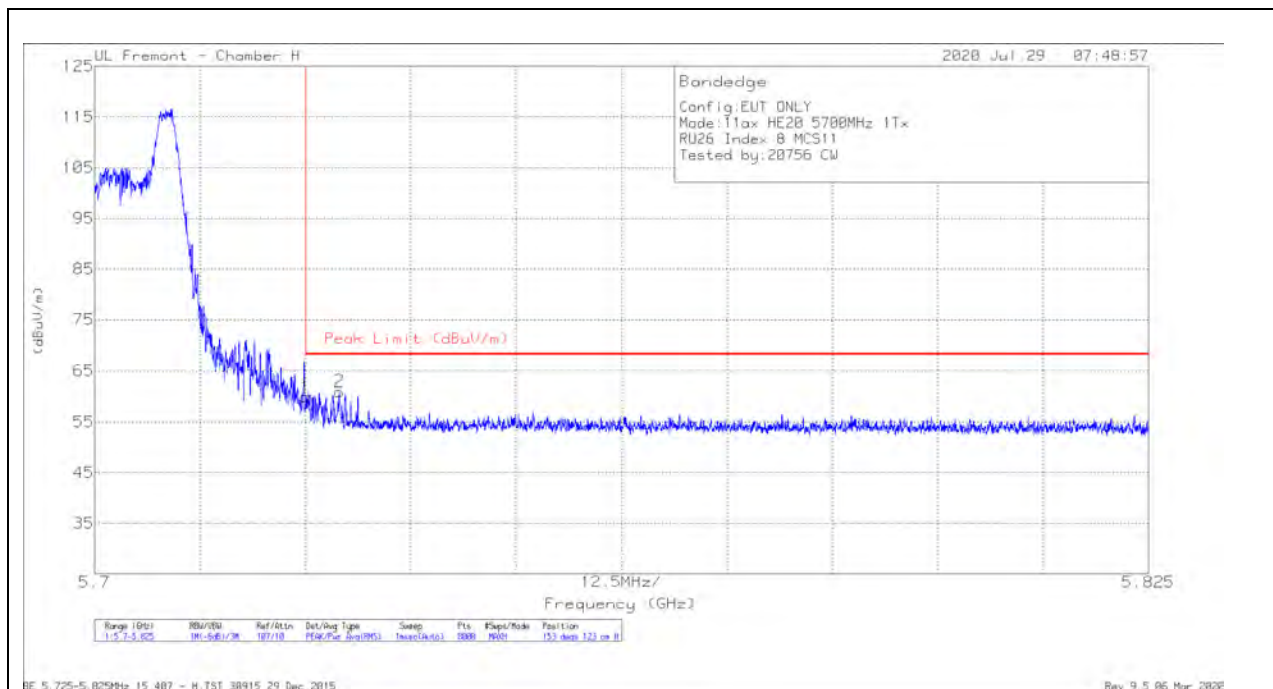

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.04	Pk	35	-21.1	59.94	68.2	-8.26	153	123	H
2	5.72902	47.19	Pk	34.9	-21.1	60.99	68.2	-7.21	153	123	H

Pk - Peak detector

VERTICAL RESULT

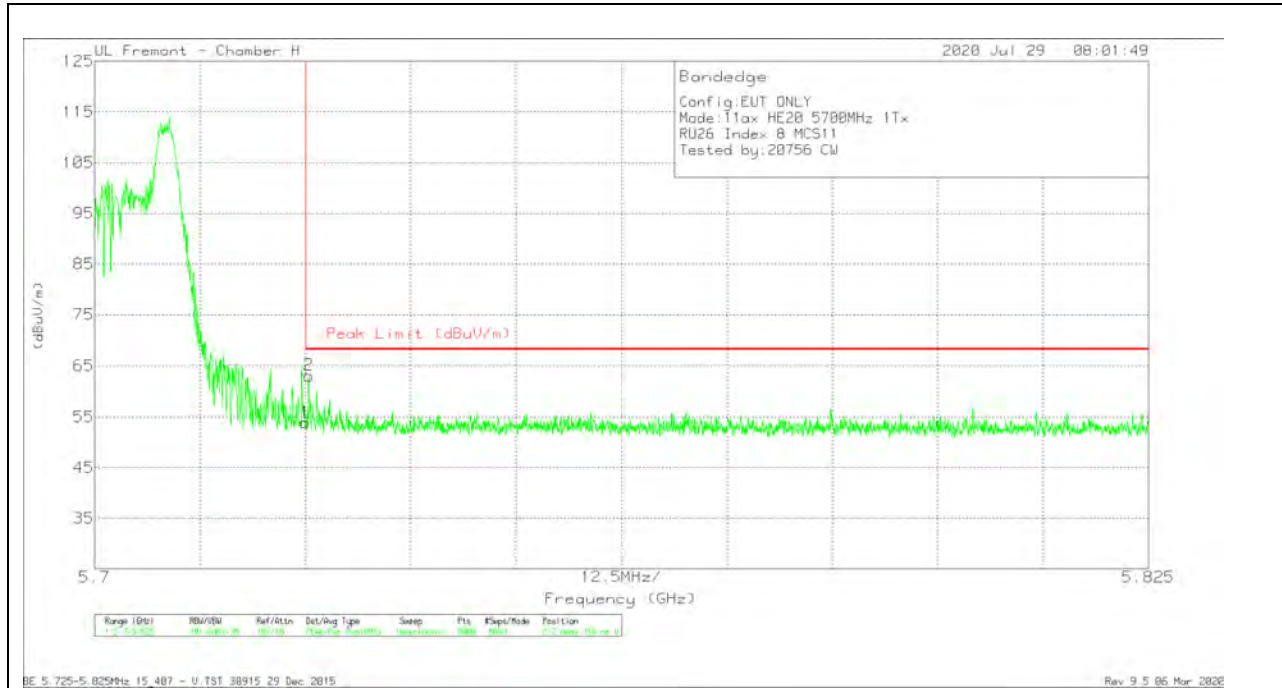


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.05	Pk	35	-21.1	53.95	68.2	-14.25	212	310	V
2	5.72538	49.29	Pk	34.9	-21.1	63.09	68.2	-5.11	212	310	V

Pk - Peak detector

2TX Antenna 5 + Antenna 6 OFDMA MODE – 242 Tones, RU Index 61

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

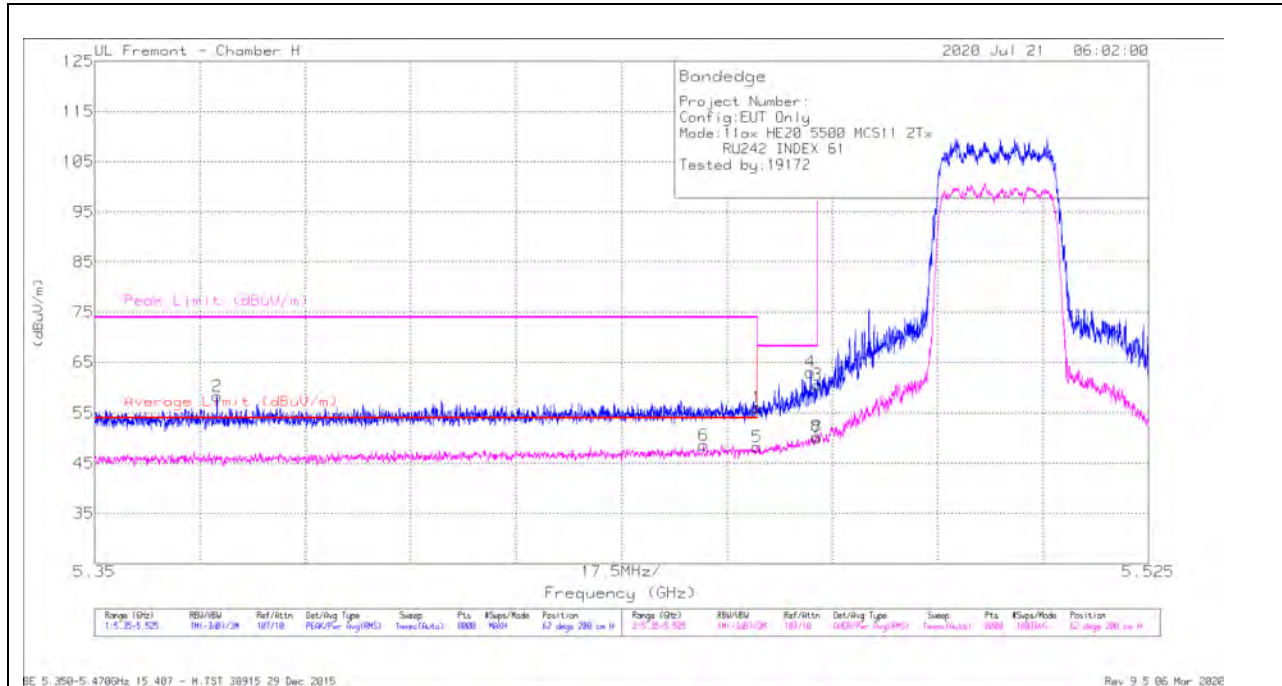

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1863 (dBm)	Amp/Cal/Ftr/Psd (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.79	Pk	35.2	-20.9	56.09	-	-	74	-17.91	62	200	H
2	* 5.37032	44.32	Pk	34.9	-20.9	58.32	-	-	74	-15.68	62	200	H
5	* 5.45998	33.85	RMS	35.2	-20.9	48.15	54	-5.85	-	-	62	200	H
6	* 5.45114	34.26	RMS	35.2	-20.9	48.56	54	-5.44	-	-	62	200	H
4	5.46889	48.76	Pk	35.3	-21	63.06	-	-	68.2	-5.14	62	200	H
8	5.46985	36.01	RMS	35.3	-21	50.31	-	-	-	-	62	200	H
3	5.46998	49.27	Pk	35.3	-21	60.57	-	-	68.2	-7.63	62	200	H
7	5.46998	35.57	RMS	35.3	-21	49.87	-	-	-	-	62	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

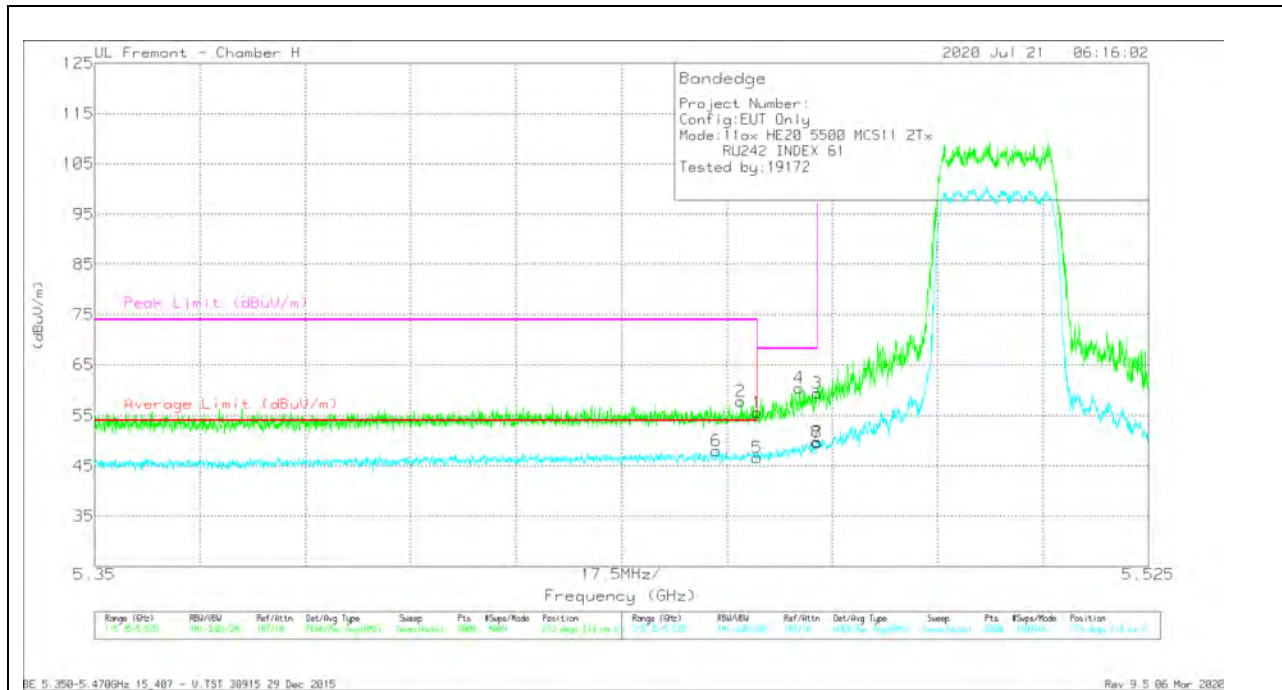


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1563 (dB/m)	Amp/CM/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.34	Pk	35.2	-20.9	55.64	-	-	74	-18.36	273	114	V
2	* 5.45733	43.42	Pk	35.3	-20.9	57.82	-	-	74	-16.18	273	114	V
5	* 5.45998	32.28	RMS	35.2	-20.9	46.58	54	-7.42	-	-	273	114	V
6	* 5.45329	33.66	RMS	35.2	-20.9	47.96	54	-6.04	-	-	273	114	V
4	5.467	46.05	Pk	35.3	-20.9	60.45	-	-	68.2	-7.75	273	114	V
8	5.46904	35.34	RMS	35.3	-21	49.64	-	-	-	-	273	114	V
3	5.46998	45.18	Pk	35.3	-21	59.48	-	-	68.2	-8.72	273	114	V
7	5.46998	35.19	RMS	35.3	-21	49.49	-	-	-	-	273	114	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 5 + Antenna 6 OFDMA MODE – 242 Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

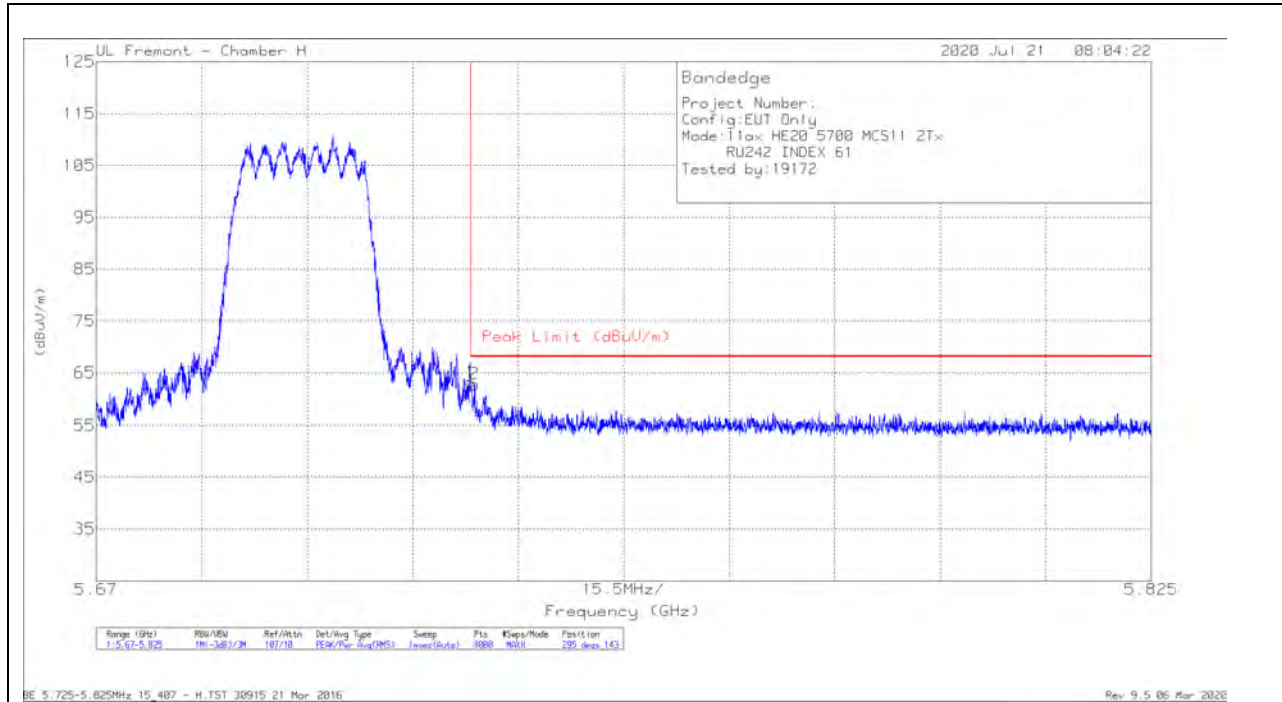

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	49.38	Pk	35	-21.1	0	63.28	68.2	-4.92	295	143	H
2	5.72559	49.1	Pk	34.9	-21.1	0	62.9	68.2	-5.3	295	143	H

Pk - Peak detector

VERTICAL RESULT

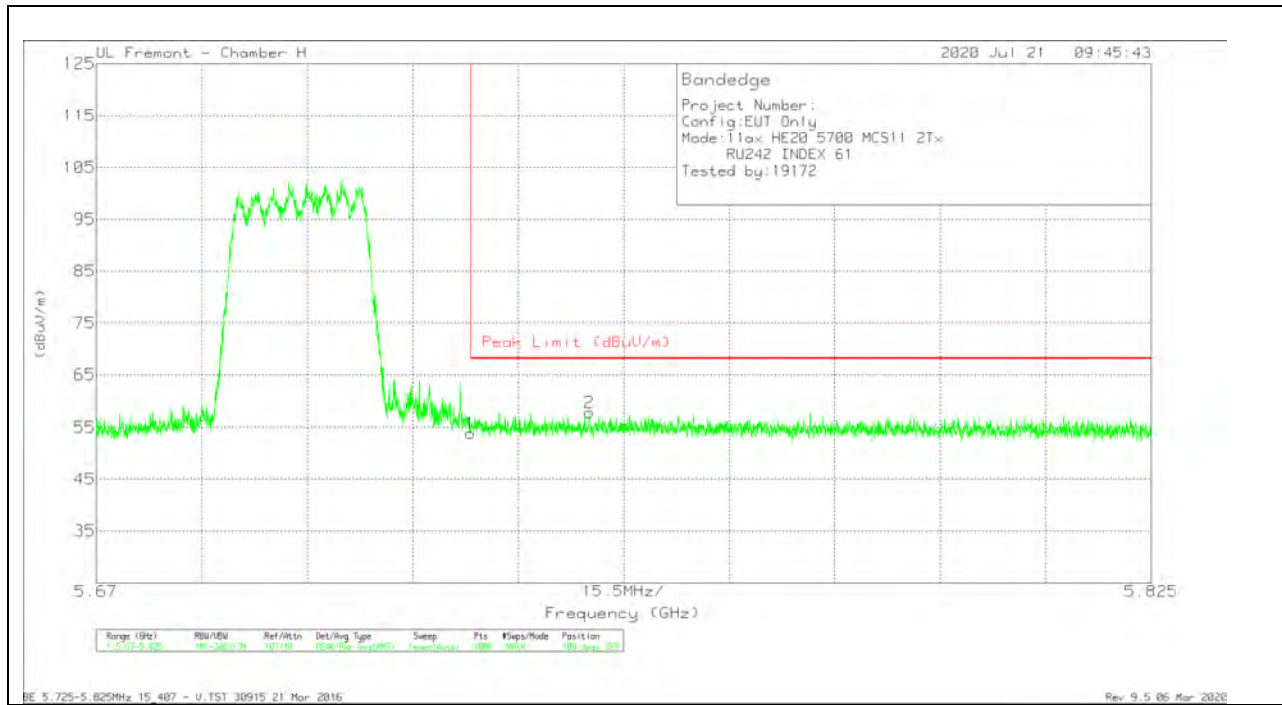


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Filtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	39.96	Pk	35	-21.1	0	53.86	68.2	-14.34	108	379	V
2	5.74245	43.86	Pk	35	-21	0	57.86	68.2	-10.34	108	379	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

242 Tones, RU Index 61 RESULTS

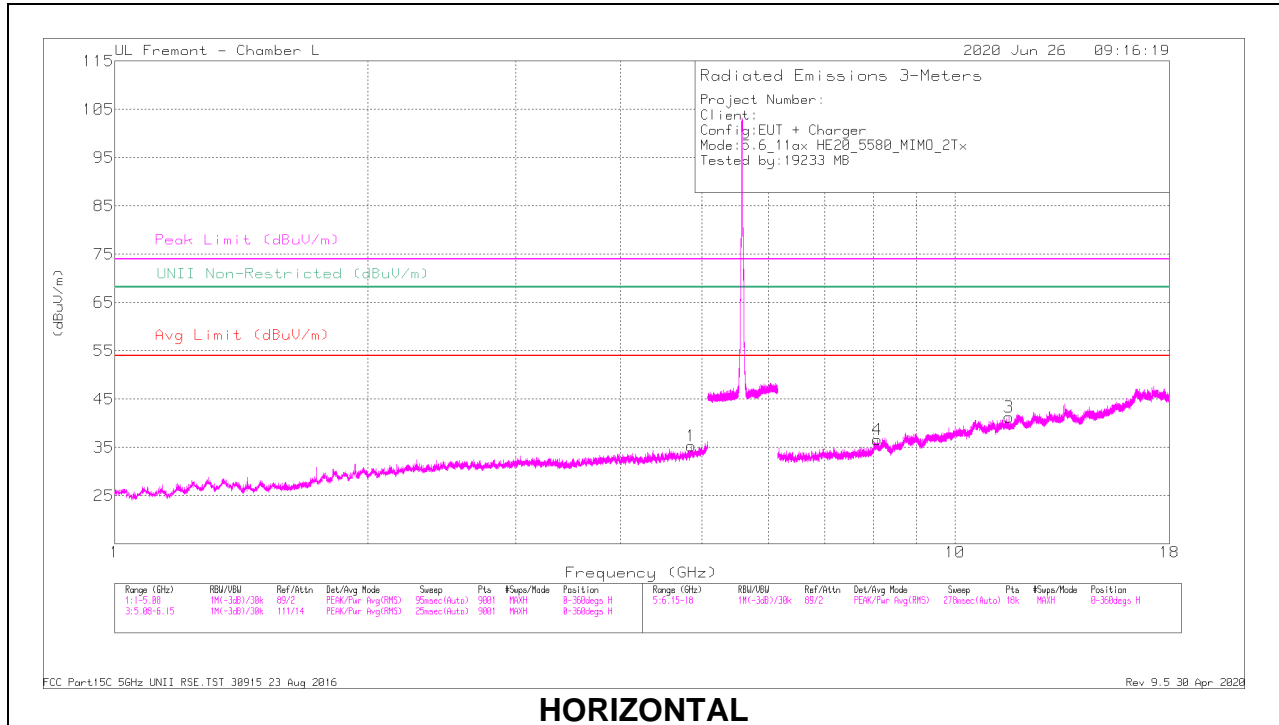

HORIZONTAL

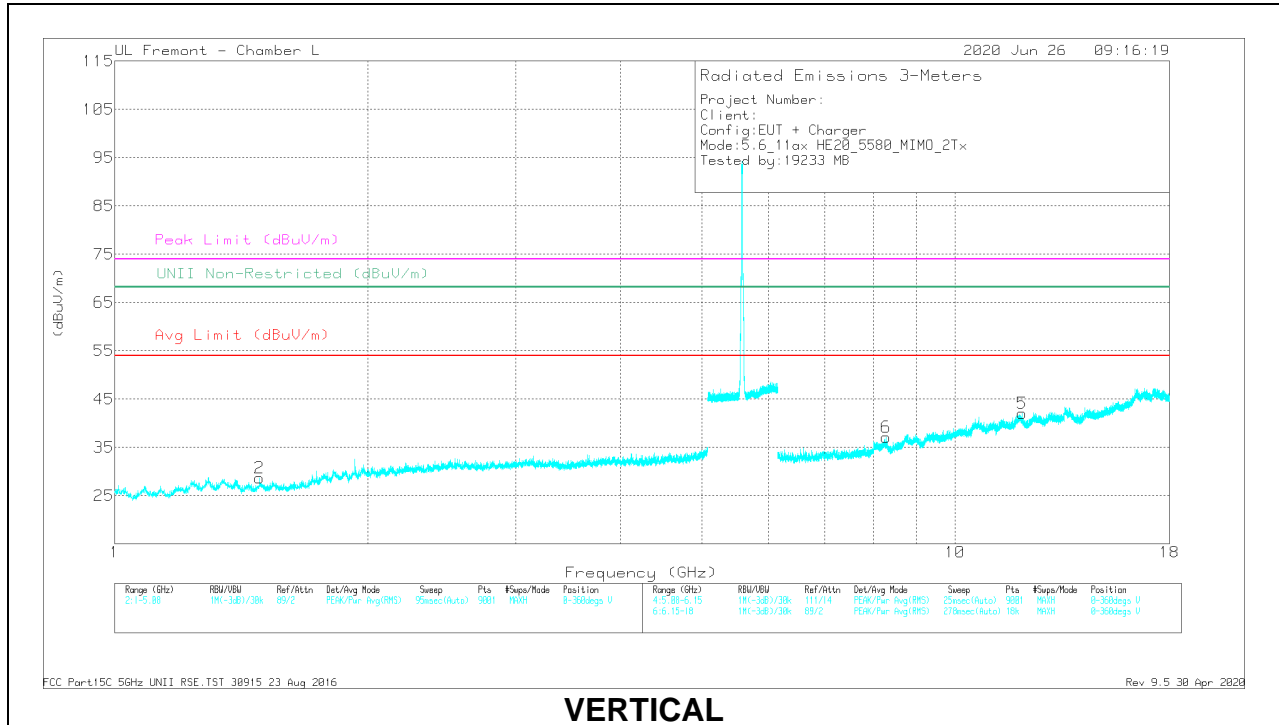

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbf/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.8557	37.21	PK-U	34.2	-26.5	44.91	-	-	74	-29.09	-	-	254	361	H
	* 4.85898	25.71	ADR	34.2	-26.4	33.51	54	-20.49	-	-	-	-	254	361	H
2	* 1.48606	40.53	PK-U	28.3	-32.7	36.13	-	-	74	-37.67	-	-	253	352	V
	* 1.48681	30.85	ADR	28.3	-32.7	26.45	54	-27.55	-	-	-	-	253	352	V
3	* 11.60035	29.62	PK-U	38.3	-19.6	48.32	-	-	74	-25.68	-	-	236	302	H
	* 11.59929	19.93	ADR	38.2	-19.6	38.53	54	-15.47	-	-	-	-	236	302	H
4	* 8.08122	33.51	PK-U	35.8	-22.5	46.81	-	-	74	-27.19	-	-	92	355	H
	* 8.08325	22.83	ADR	35.8	-22.5	36.13	54	-17.87	-	-	-	-	92	355	H
5	* 12.01539	31.38	PK-U	38.7	-19.8	50.28	-	-	74	-23.72	-	-	316	362	V
	* 12.01852	21.38	ADR	38.7	-19.8	40.28	54	-13.72	-	-	-	-	316	362	V
6	* 8.27714	31.43	PK-U	35.8	-21.4	45.83	-	-	74	-28.17	-	-	172	346	V
	* 8.27574	21.4	ADR	35.8	-21.4	35.8	54	-18.2	-	-	-	-	172	346	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

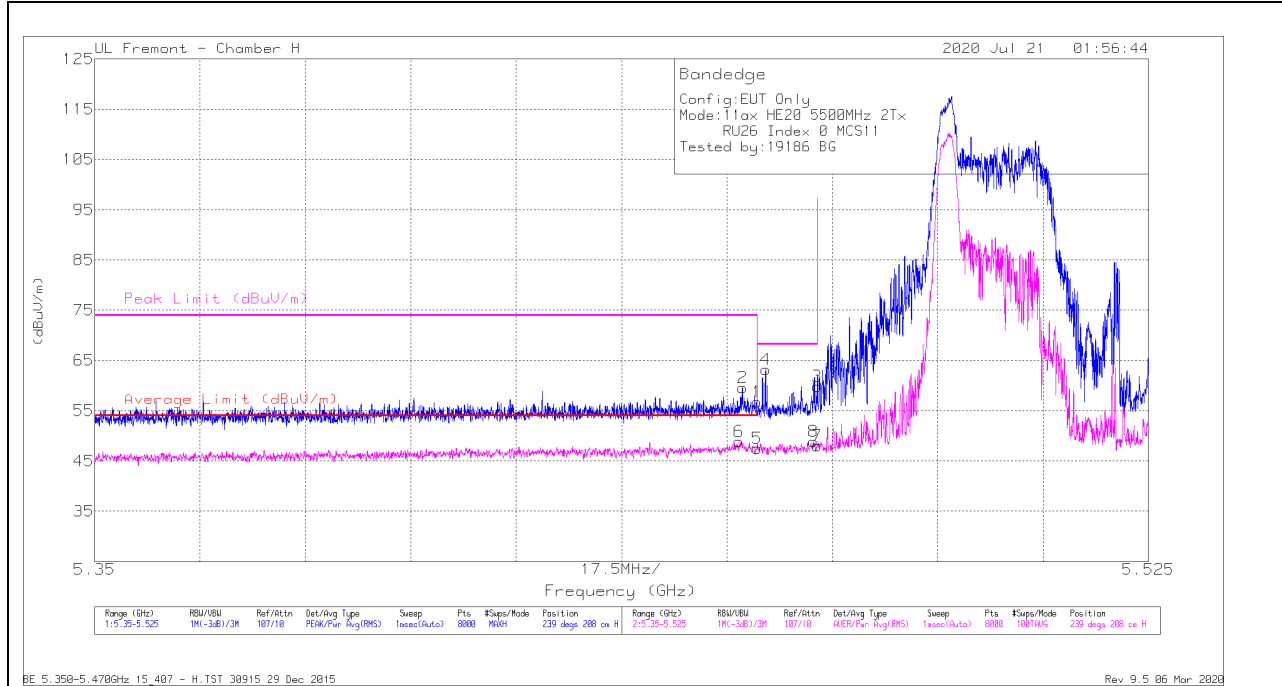

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1863 (dBm)	Amp/Cal/Freq/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.42	Pk	35.2	-20.9	56.72	-	-	74	-17.28	239	208	H
2	* 5.45757	45.16	Pk	35.3	-20.9	59.56	-	-	74	-14.44	239	208	H
5	* 5.45998	33.09	RMS	35.2	-20.9	47.39	54	-6.61	-	-	239	208	H
6	* 5.45698	34.44	RMS	35.3	-20.9	48.84	54	-5.16	-	-	239	208	H
4	5.46142	48.95	Pk	35.2	-20.9	63.25	-	-	68.2	-4.95	239	208	H
8	5.46954	34.53	RMS	35.3	-21	48.83	-	-	-	-	239	208	H
3	5.46998	45.55	Pk	35.3	-21	59.85	-	-	68.2	-8.35	239	208	H
7	5.46998	33.61	RMS	35.3	-21	47.91	-	-	-	-	239	208	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

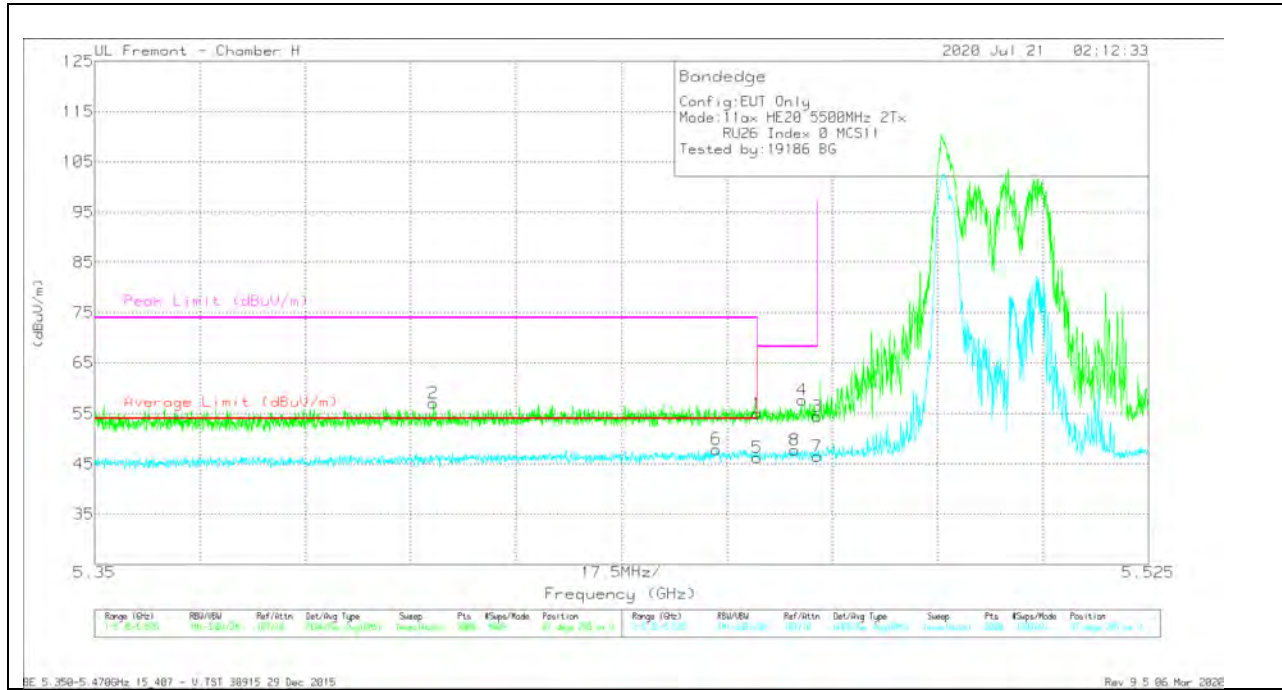


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1563 (dB/m)	Amp/CM/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.74	Pk	35.2	-20.9	55.04	-	-	74	-18.96	87	295	V
2	* 5.40629	42.96	Pk	35	-20.8	57.16	-	-	74	-16.84	87	295	V
5	* 5.45998	31.86	RMS	35.2	-20.9	46.16	54	-7.84	-	-	87	295	V
6	* 5.45329	33.56	RMS	35.2	-20.9	47.86	54	-6.14	-	-	87	295	V
8	5.46624	33.34	RMS	35.2	-20.9	47.64	-	-	-	-	87	295	V
4	5.46748	43.36	Pk	35.3	-20.9	57.76	-	-	68.2	-10.44	87	295	V
3	5.46998	40.17	Pk	35.3	-21	54.47	-	-	68.2	-13.73	87	295	V
7	5.46998	32.12	RMS	35.3	-21	46.42	-	-	-	-	87	295	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

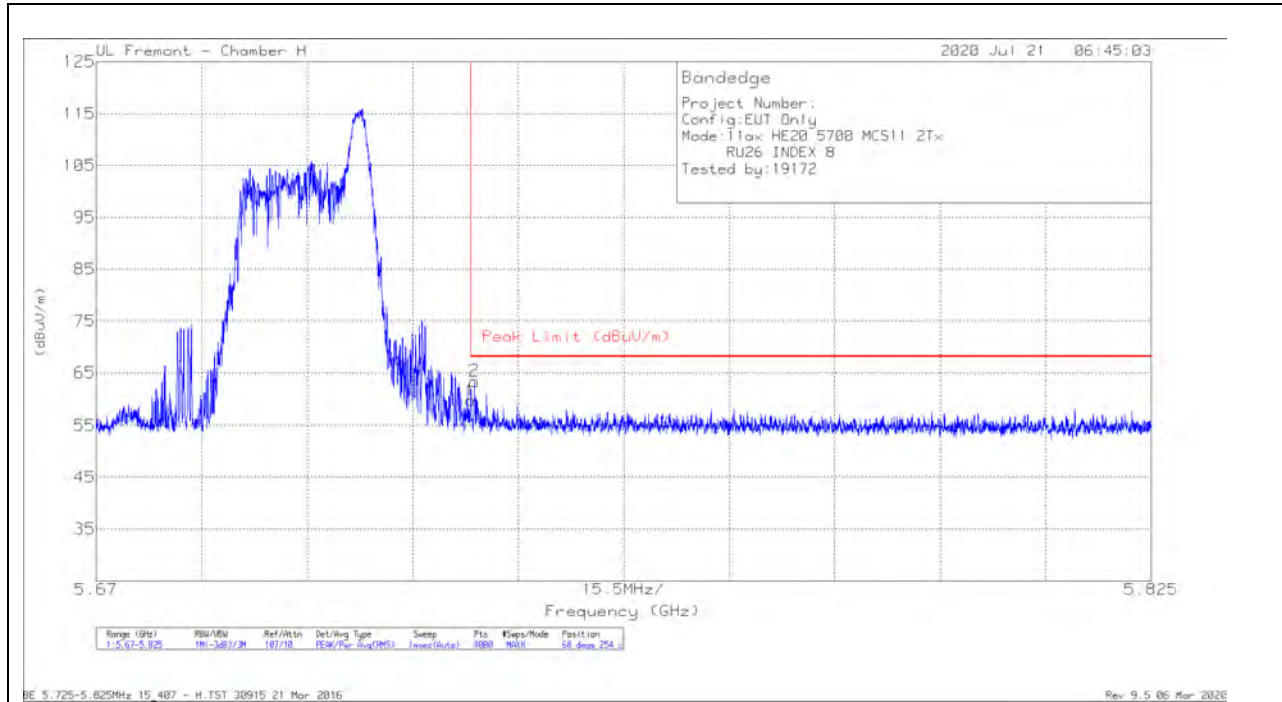

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Parad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.9	Pk	35	-21.1	59.8	68.2	-8.4	68	254	H
2	5.72555	49.67	Pk	34.9	-21.1	63.47	68.2	-4.73	68	254	H

Pk - Peak detector

VERTICAL RESULT

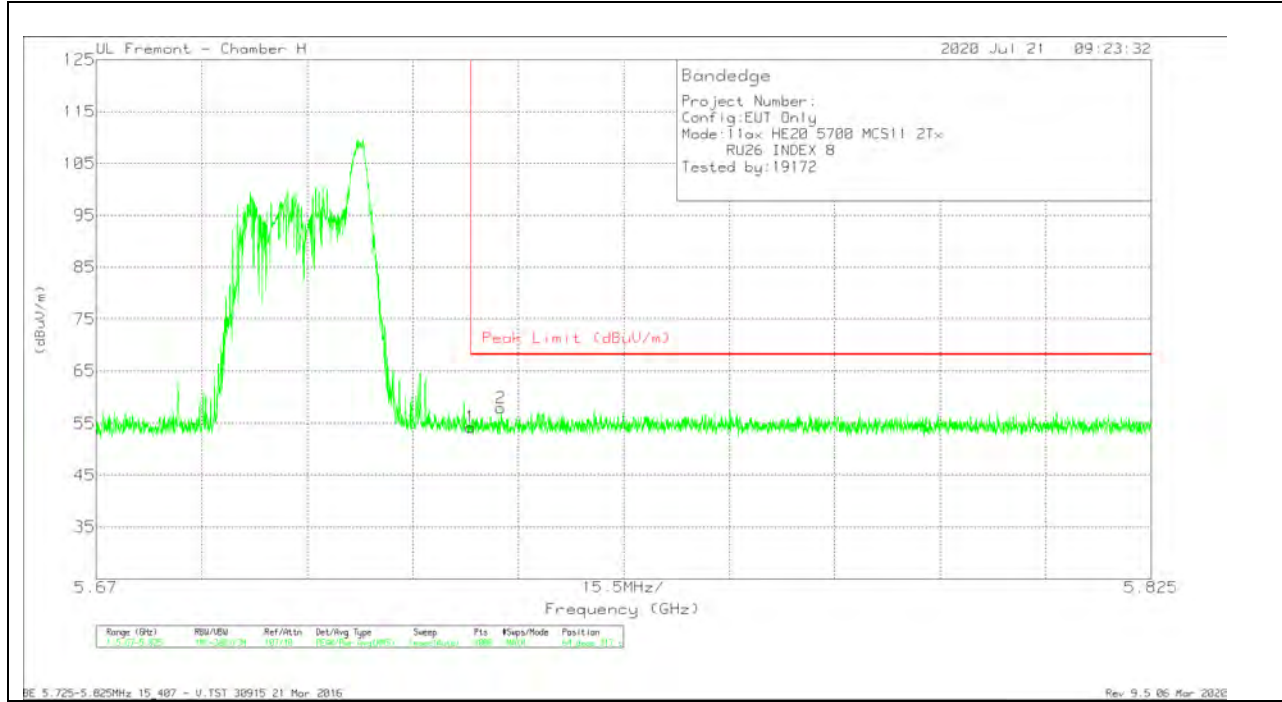


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/Par d (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.39	Pk	35	-21.1	54.29	68.2	-13.91	64	317	V
2	5.72945	44.06	Pk	35	-21.1	57.96	68.2	-10.24	64	317	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

26 Times, RU Index 8 RESULTS

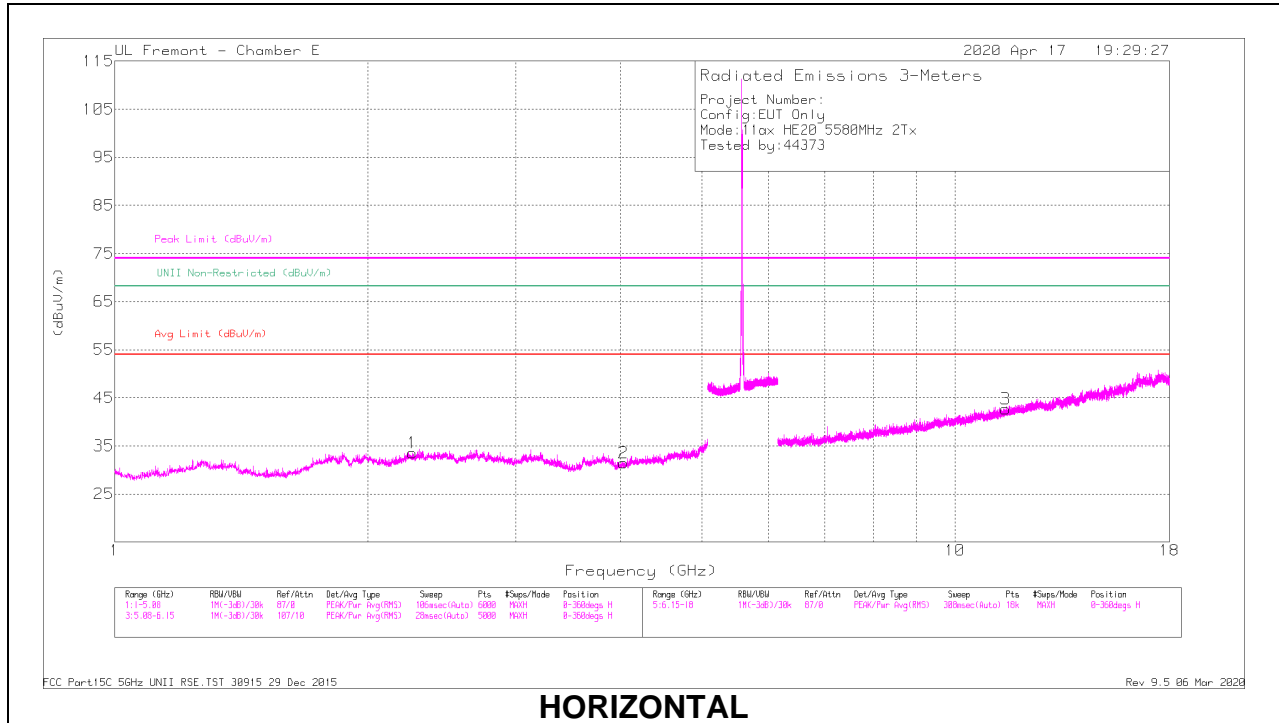

HORIZONTAL

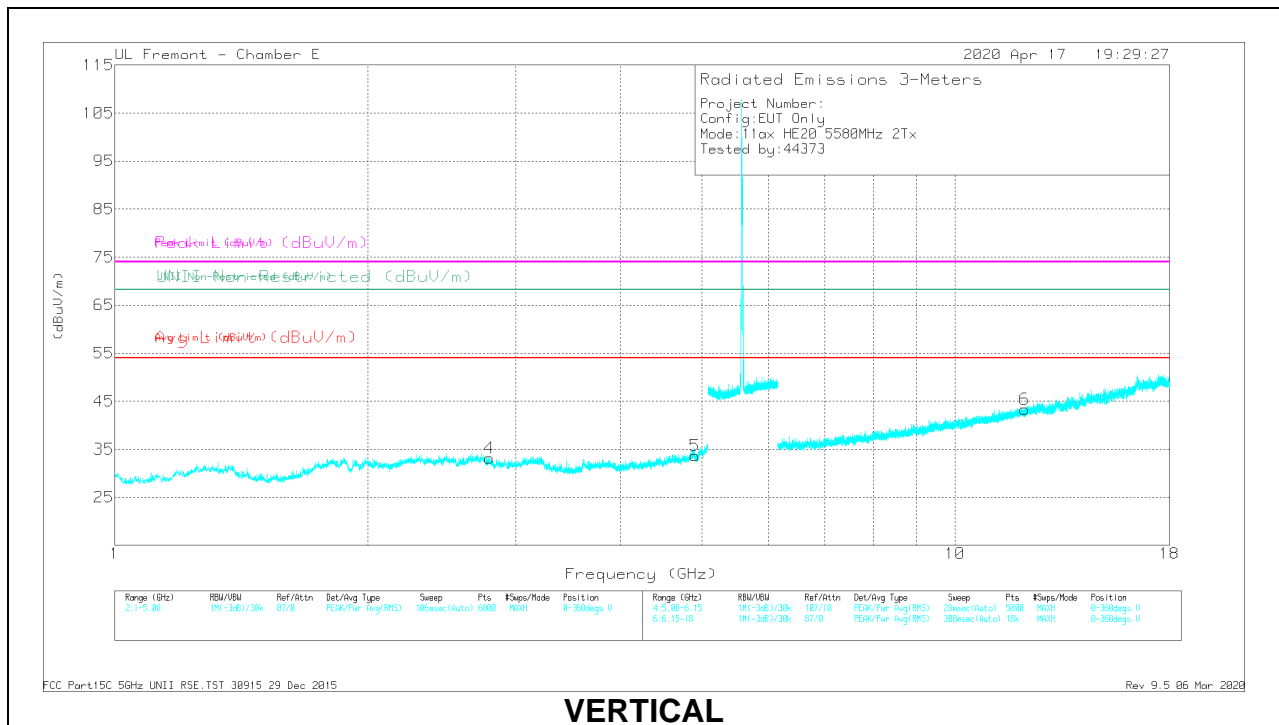

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Padded (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.26413	44.72	PK-U	31.8	-35.8	40.72	-	-	74	-33.28	360	200	H
	* 2.26073	33.27	ADR	31.8	-35.8	29.27	54	-24.73	-	-	360	200	H
2	* 4.02352	38.65	PK-U	33.5	-33	39.15	-	-	74	-34.85	230	175	H
	* 4.02333	27.35	ADR	33.5	-33	27.85	54	-26.15	-	-	230	175	H
4	* 2.79573	43.64	PK-U	32.6	-35.5	40.74	-	-	74	-33.26	125	101	V
	* 2.79347	31.97	ADR	32.5	-35.5	28.97	54	-25.03	-	-	125	101	V
5	* 4.9036	39.06	PK-U	34.1	-31	42.16	-	-	74	-31.84	55	150	V
	* 4.90429	27.08	ADR	34.1	-31	30.18	54	-23.82	-	-	55	150	V
3	* 11.48501	35.68	PK-U	38	-24.2	49.48	-	-	74	-24.52	234	200	H
	* 11.48775	24.81	ADR	38	-24.2	38.61	54	-15.39	-	-	234	200	H
6	* 12.11569	35.35	PK-U	38.7	-23.6	50.45	-	-	74	-23.55	85	125	V
	* 12.11318	24.3	ADR	38.8	-23.6	39.5	54	-14.5	-	-	85	125	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.1.17. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.6 GHz BAND

1TX Antenna 5 MODE – 484 Tones, RU Index 65

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

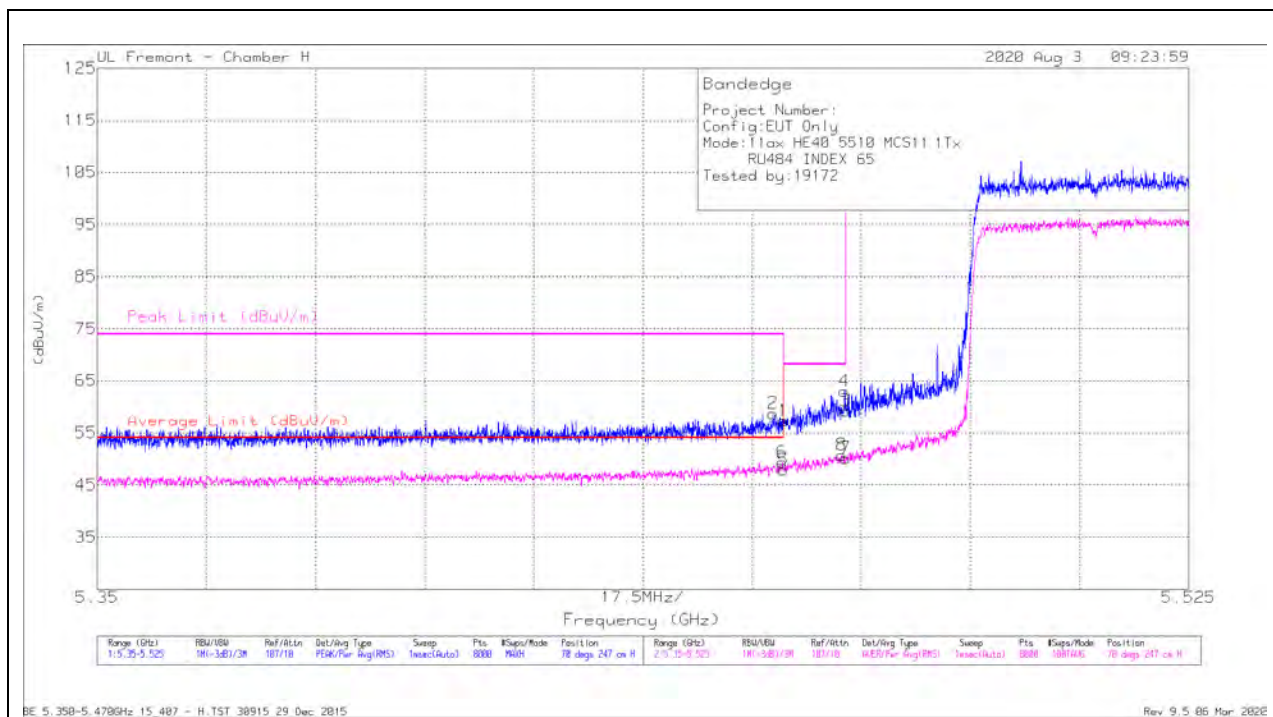

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CbI/Fitr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	43.04	Pk	35.2	-20.9	57.34	-	-	74	-16.66	70	247	H
2	* 5.45834	44.38	Pk	35.3	-20.9	58.78	-	-	74	-15.22	70	247	H
5	* 5.45998	33.55	RMS	35.2	-20.9	47.85	54	-6.15	-	-	70	247	H
6	* 5.45983	35.06	RMS	35.2	-20.9	49.36	54	-4.64	-	-	70	247	H
8	5.46934	36.44	RMS	35.3	-21	50.74	-	-	-	-	70	247	H
4	5.46983	48.65	Pk	35.3	-21	62.95	-	-	68.2	-5.25	70	247	H
3	5.46998	44.94	Pk	35.3	-21	59.24	-	-	68.2	-8.96	70	247	H
7	5.46998	35.82	RMS	35.3	-21	50.12	-	-	-	-	70	247	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

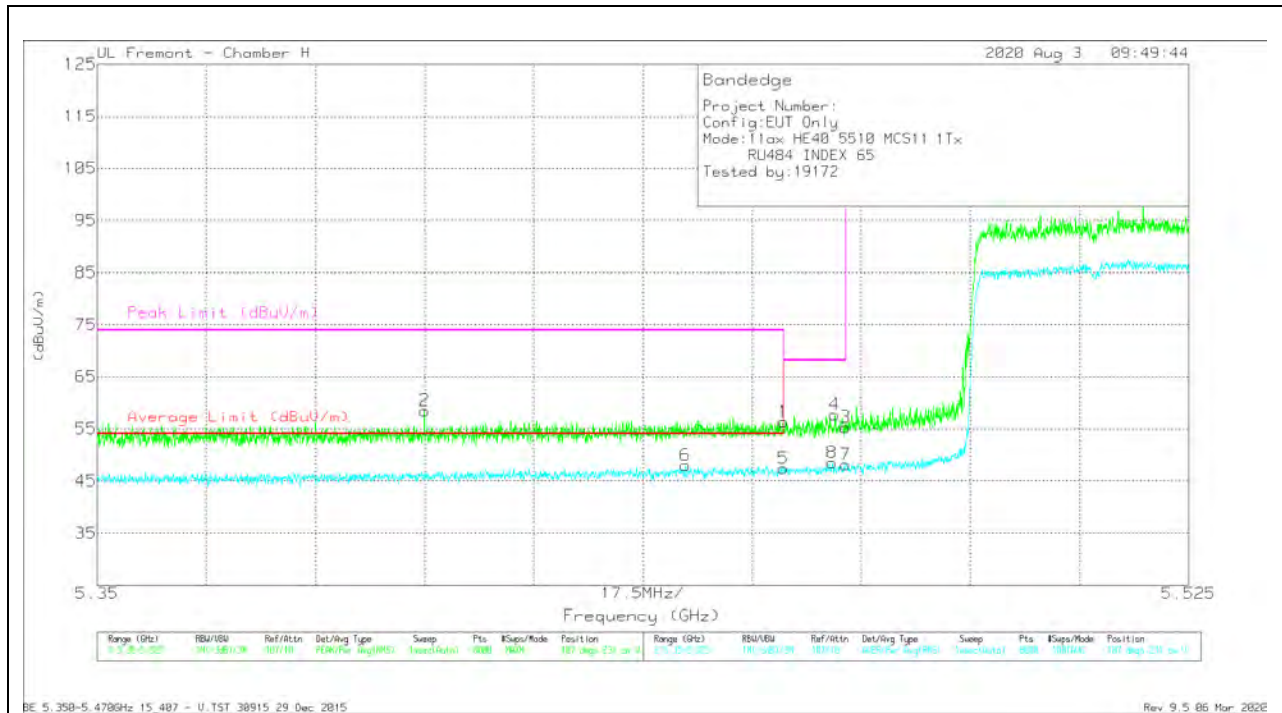


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.07	Pk	35.2	-20.9	56.37	-	-	74	-17.63	107	231	V
2	* 5.40246	44.32	Pk	35	-20.8	58.52	-	-	74	-15.48	107	231	V
5	* 5.45998	33.13	RMS	35.2	-20.9	47.43	54	-6.57	-	-	107	231	V
6	* 5.44432	33.72	RMS	35.1	-20.8	48.02	54	-5.98	-	-	107	231	V
8	5.46781	34.15	RMS	35.3	-20.9	48.55	-	-	-	-	107	231	V
4	5.46825	43.35	Pk	35.3	-20.9	57.75	-	-	68.2	-10.45	107	231	V
3	5.46998	41	Pk	35.3	-21	55.3	-	-	68.2	-12.9	107	231	V
7	5.46998	33.87	RMS	35.3	-21	48.17	-	-	-	-	107	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna 5 MODE – 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

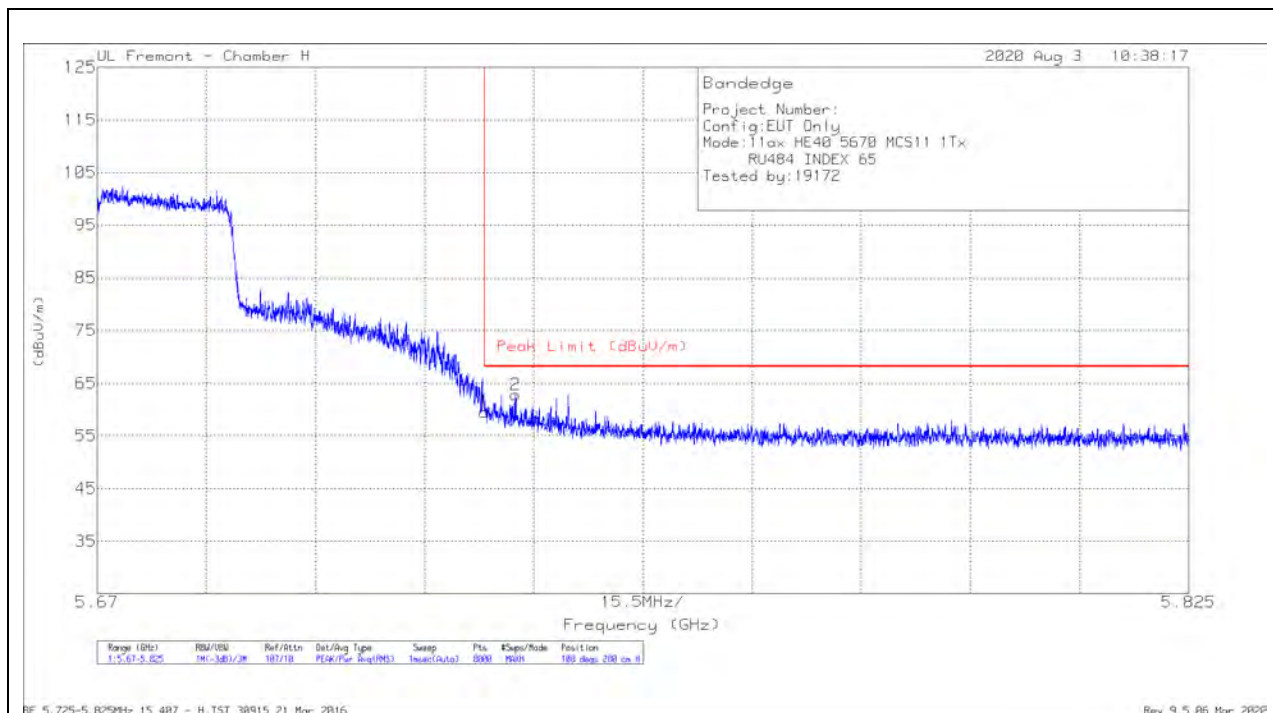

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.7	Pk	35	-21.1	59.6	68.2	-8.6	108	280	H
2	5.72941	48.87	Pk	35	-21.1	62.77	68.2	-5.43	108	280	H

Pk - Peak detector

VERTICAL RESULT

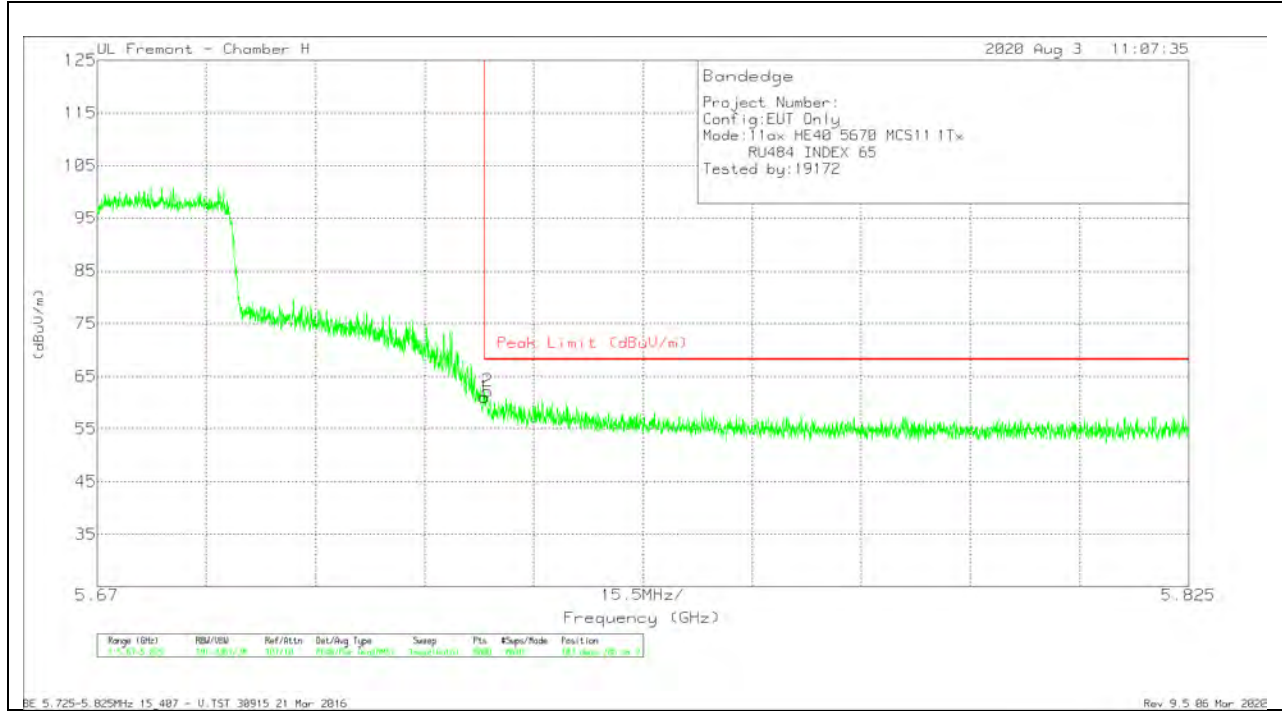


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.18	Pk	35	-21.1	61.08	68.2	-7.12	103	288	V
2	5.72542	48.42	Pk	34.9	-21.1	62.22	68.2	-5.98	103	288	V

Pk - Peak detector

1TX Antenna 5 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

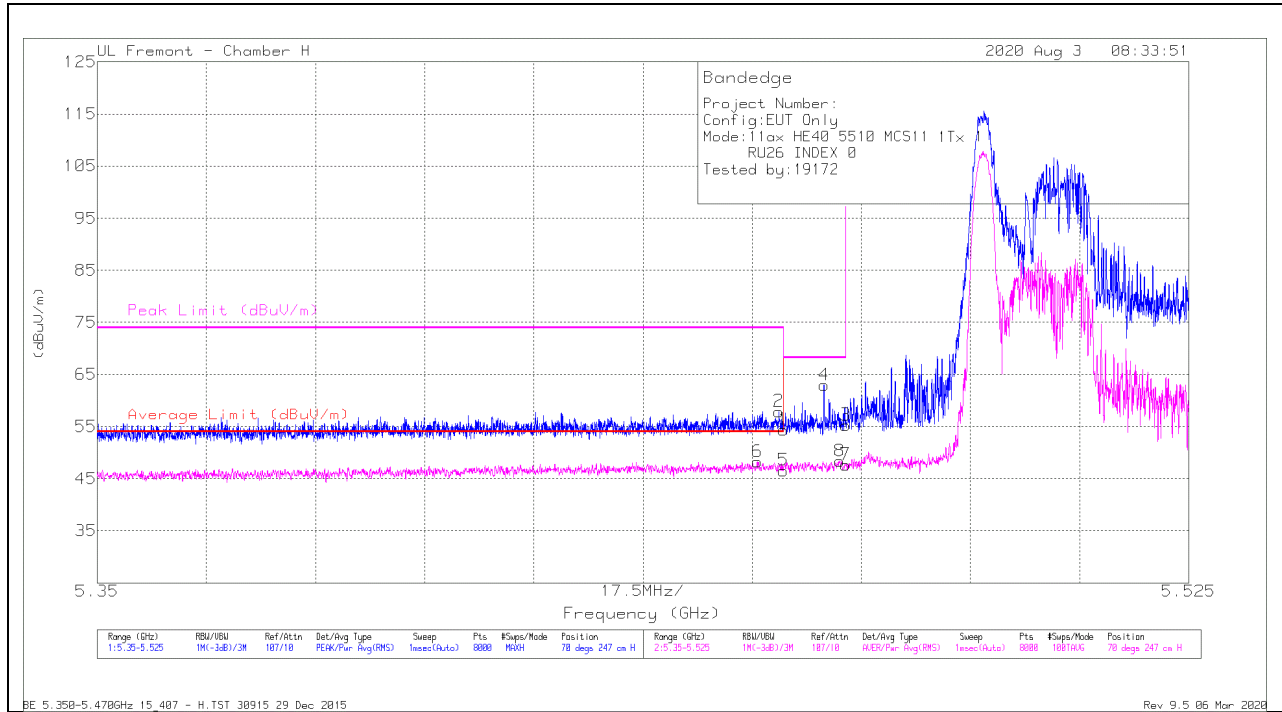

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.13	Pk	35.2	-20.9	54.43	-	-	74	-19.57	70	247	H
2	* 5.45926	43.62	Pk	35.2	-20.9	57.92	-	-	74	-16.08	70	247	H
5	* 5.45998	32.28	RMS	35.2	-20.9	46.58	54	-7.42	-	-	70	247	H
6	* 5.45582	33.85	RMS	35.3	-20.9	48.25	54	-5.75	-	-	70	247	H
4	5.46652	48.72	Pk	35.2	-20.9	63.02	-	-	68.2	-5.18	70	247	H
8	5.46906	34.07	RMS	35.3	-21	48.37	-	-	-	-	70	247	H
3	5.46998	41	Pk	35.3	-21	55.3	-	-	68.2	-12.9	70	247	H
7	5.46998	33.4	RMS	35.3	-21	47.7	-	-	-	-	70	247	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

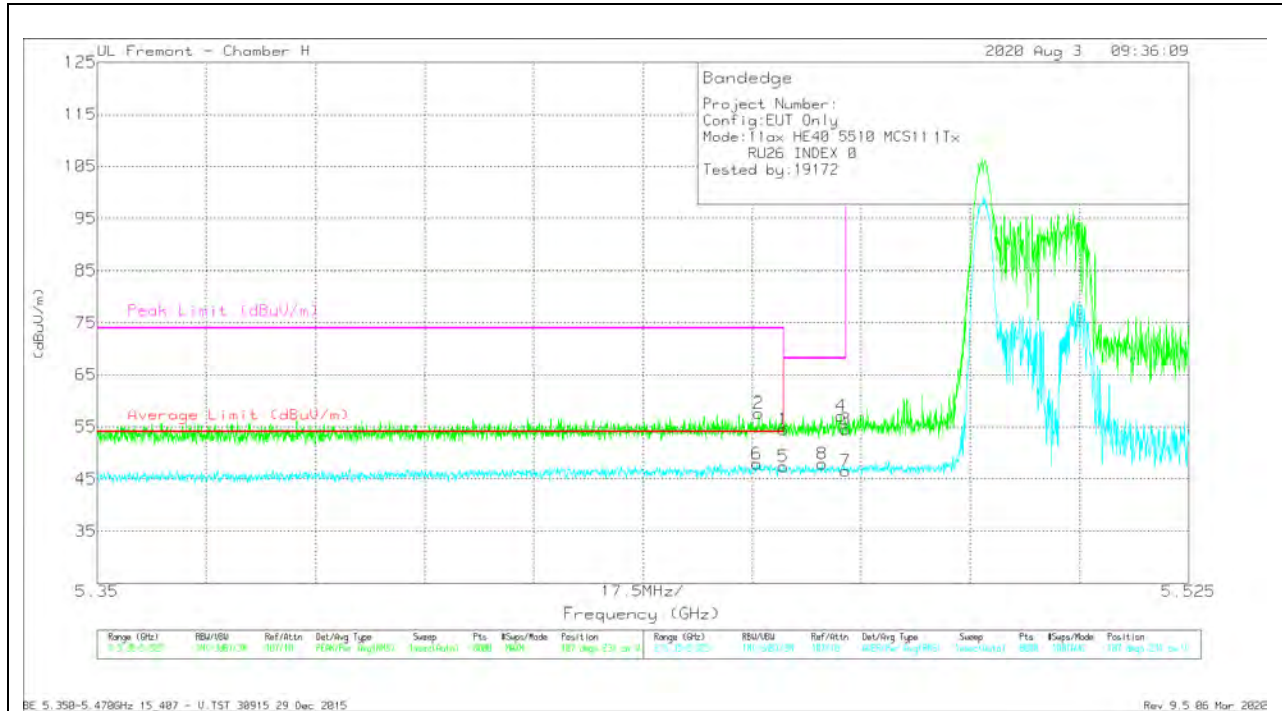


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.22	Pk	35.2	-20.9	54.52	-	-	74	-19.48	107	231	V
2	* 5.45604	43.16	Pk	35.3	-20.9	57.56	-	-	74	-16.44	107	231	V
5	* 5.45998	33.08	RMS	35.2	-20.9	47.38	54	-6.62	-	-	107	231	V
6	* 5.45571	33.5	RMS	35.3	-20.9	47.9	54	-6.1	-	-	107	231	V
8	5.46626	33.57	RMS	35.2	-20.9	47.87	-	-	-	-	107	231	V
4	5.46924	42.85	Pk	35.3	-21	57.15	-	-	68.2	-11.05	107	231	V
3	5.46998	40.21	Pk	35.3	-21	54.51	-	-	68.2	-13.69	107	231	V
7	5.46998	32.24	RMS	35.3	-21	46.54	-	-	-	-	107	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna 5 MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

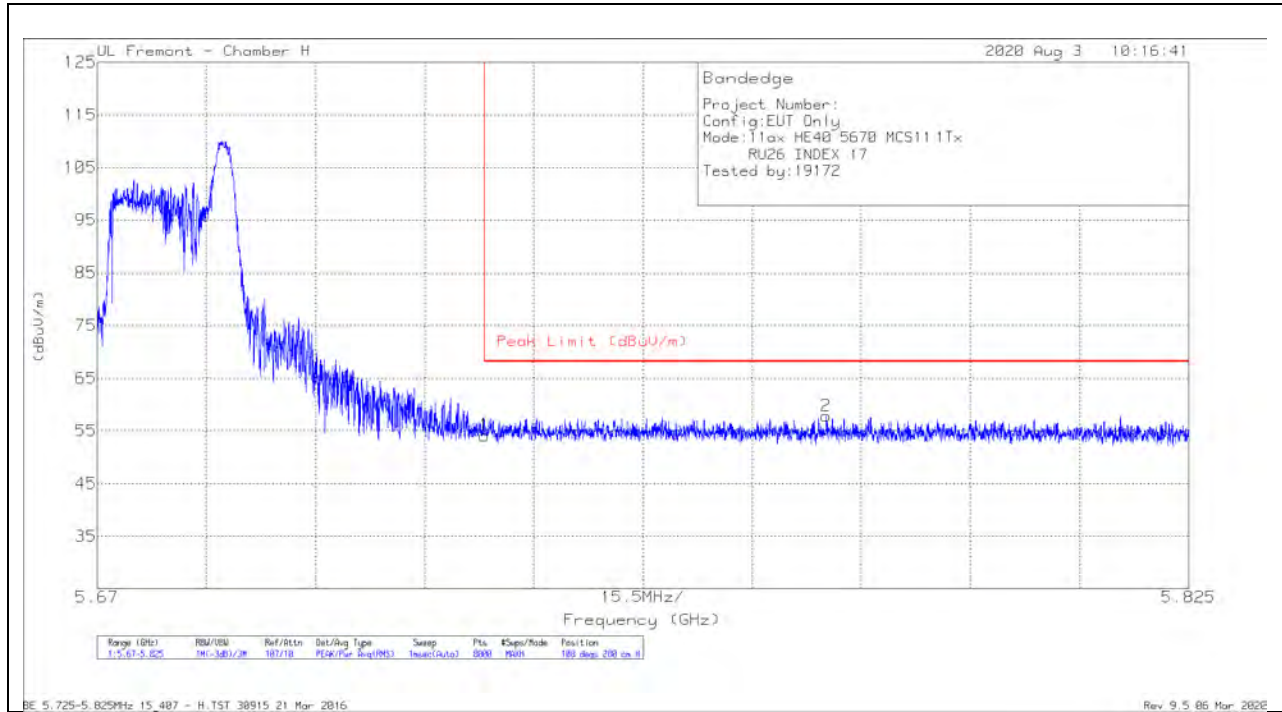

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.25	Pk	35	-21.1	54.15	68.2	-14.05	108	280	H
2	5.77353	43.86	Pk	35.1	-21.1	57.86	68.2	-10.34	108	280	H

Pk - Peak detector

VERTICAL RESULT

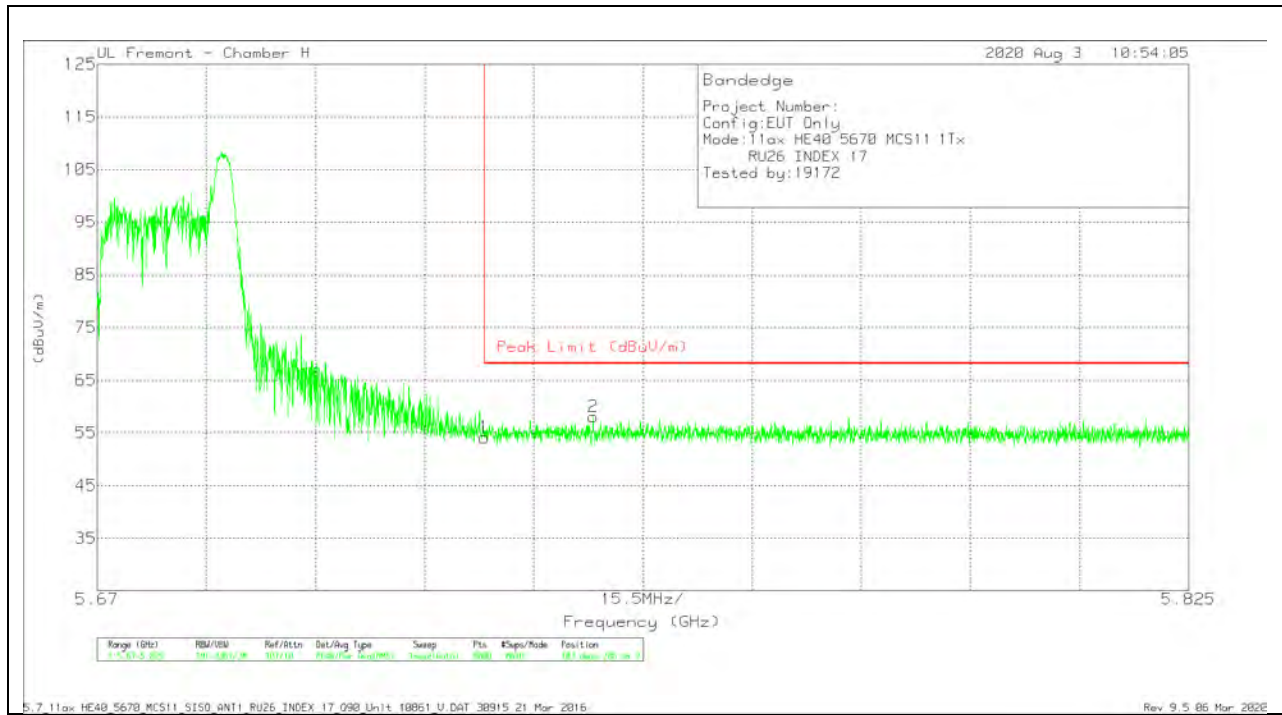


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.24	Pk	35	-21.1	54.14	68.2	-14.06	103	288	V
2	5.74044	44.26	Pk	34.9	-21.1	58.06	68.2	-10.14	103	288	V

Pk - Peak detector

1TX Antenna 6 MODE – 484 Tones, RU Index 65

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

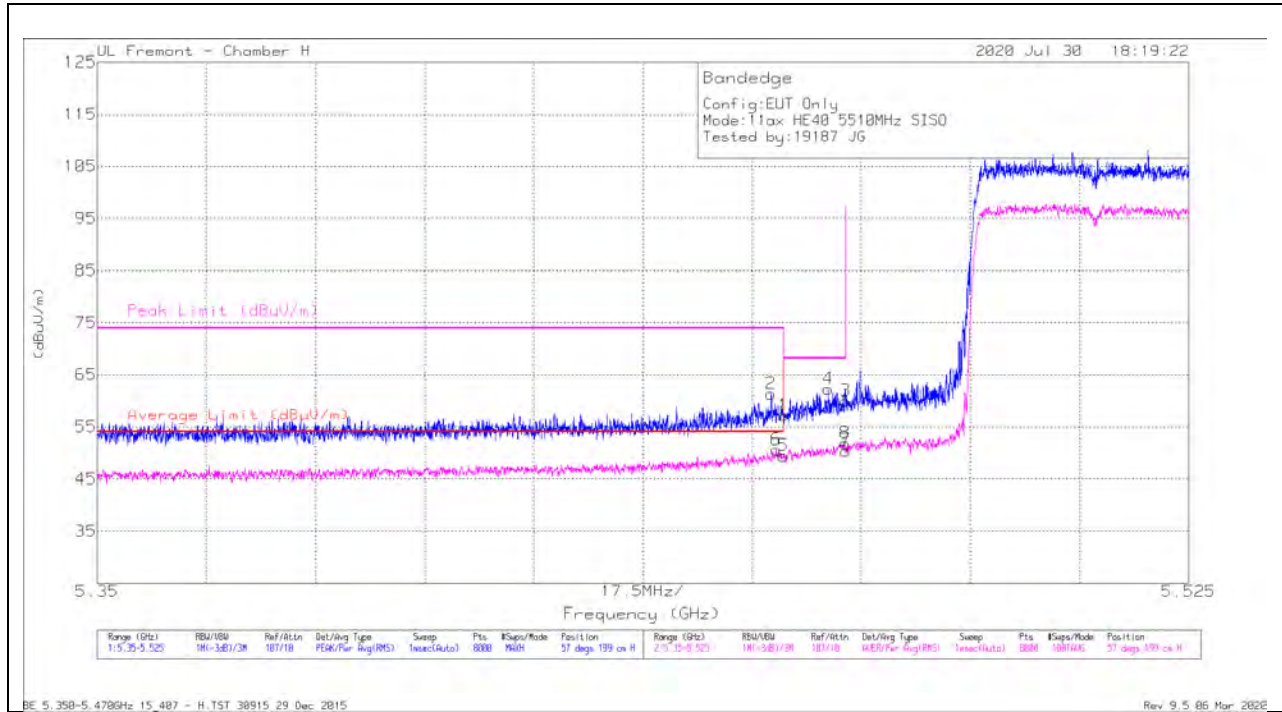

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CbI/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.94	Pk	35.2	-20.9	57.24	-	-	74	-16.76	57	199	H
2	* 5.45806	46.97	Pk	35.3	-20.9	61.37	-	-	74	-12.63	57	199	H
5	* 5.45998	35.15	RMS	35.2	-20.9	49.45	54	-4.55	-	-	57	199	H
6	* 5.45882	36.26	RMS	35.3	-20.9	50.66	54	-3.34	-	-	57	199	H
4	5.46718	47.88	Pk	35.3	-20.9	62.28	-	-	68.2	-5.92	57	199	H
8	5.46987	37.53	RMS	35.3	-21	51.83	-	-	-	-	57	199	H
3	5.46998	45.64	Pk	35.3	-21	59.94	-	-	68.2	-8.26	57	199	H
7	5.46998	36.14	RMS	35.3	-21	50.44	-	-	-	-	57	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

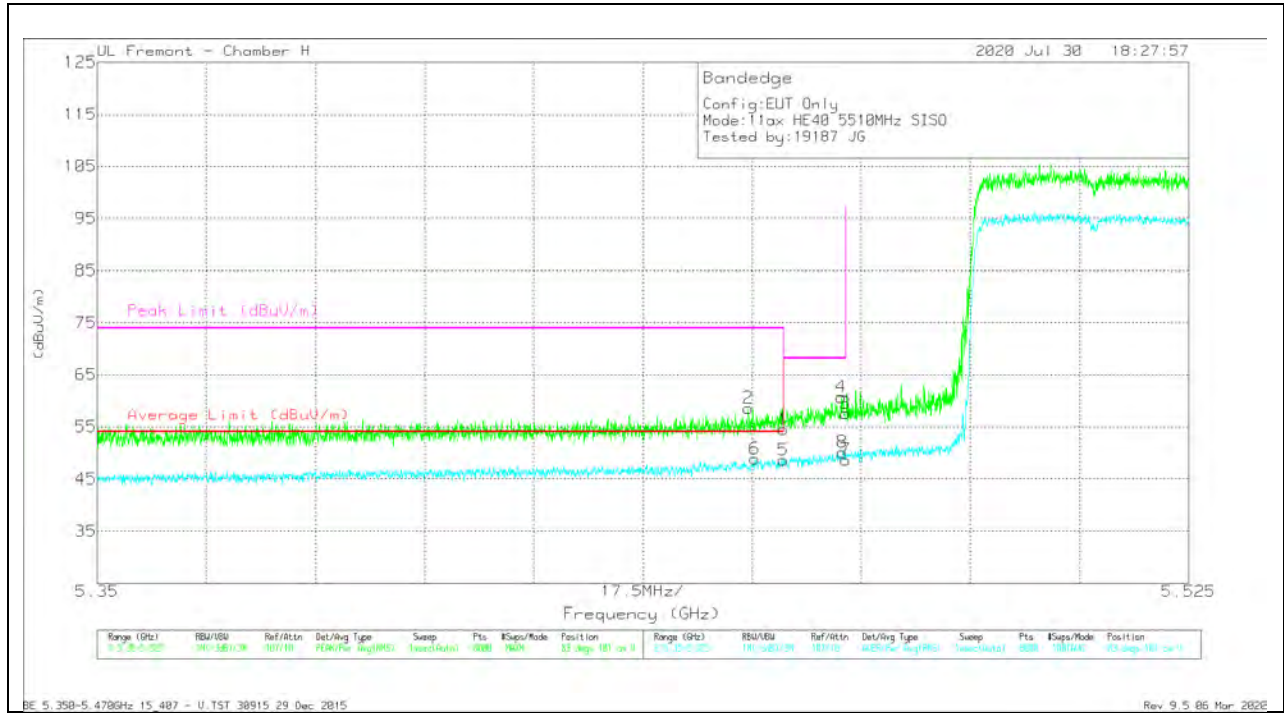


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.2	Pk	35.2	-20.9	54.5	-	-	74	-19.5	83	101	V
2	* 5.4544	44.36	Pk	35.2	-20.9	58.66	-	-	74	-15.34	83	101	V
5	* 5.45998	34.3	RMS	35.2	-20.9	48.6	54	-5.4	-	-	83	101	V
6	* 5.45545	34.44	RMS	35.3	-20.9	48.84	54	-5.16	-	-	83	101	V
4	5.4693	46.47	Pk	35.3	-21	60.77	-	-	68.2	-7.43	83	101	V
8	5.46945	35.86	RMS	35.3	-21	50.16	-	-	-	-	83	101	V
3	5.46998	43.36	Pk	35.3	-21	57.66	-	-	68.2	-10.54	83	101	V
7	5.46998	34.4	RMS	35.3	-21	48.7	-	-	-	-	83	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna 6 MODE – MCS 11, 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

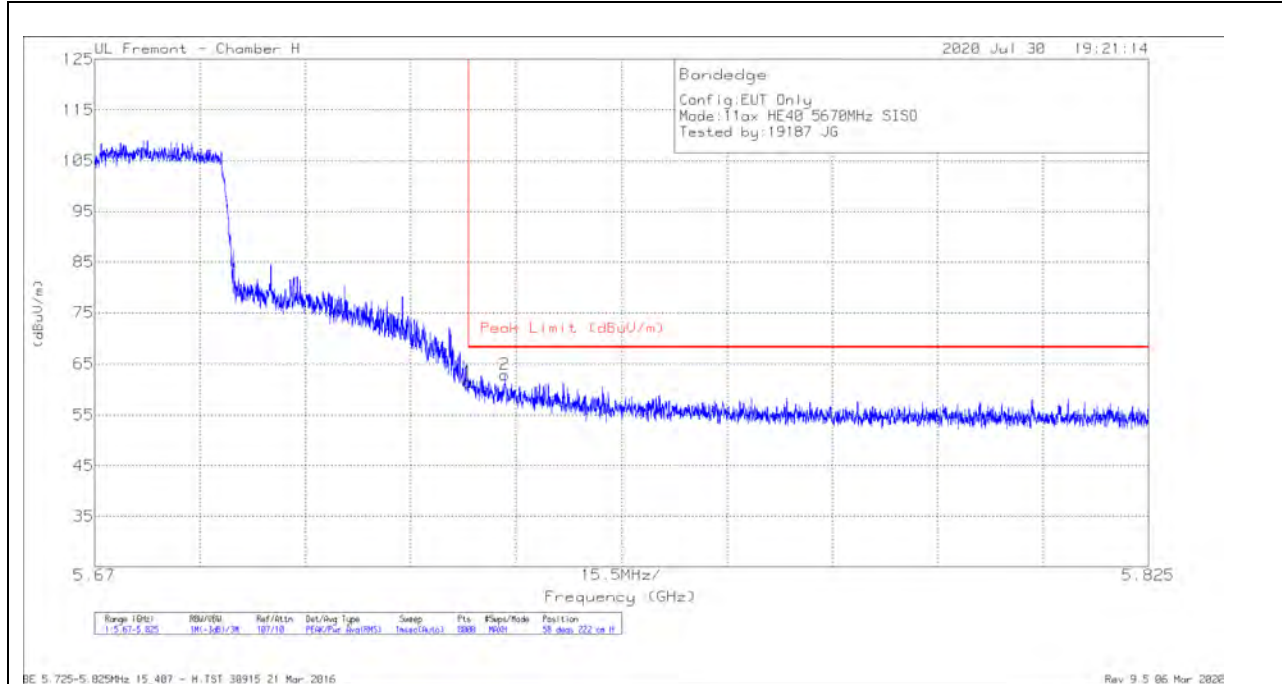

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.53	Pk	35	-21.1	61.43	68.2	-6.77	58	222	H
2	5.73034	49.03	Pk	35	-21.1	62.93	68.2	-5.27	58	222	H

Pk - Peak detector

VERTICAL RESULT

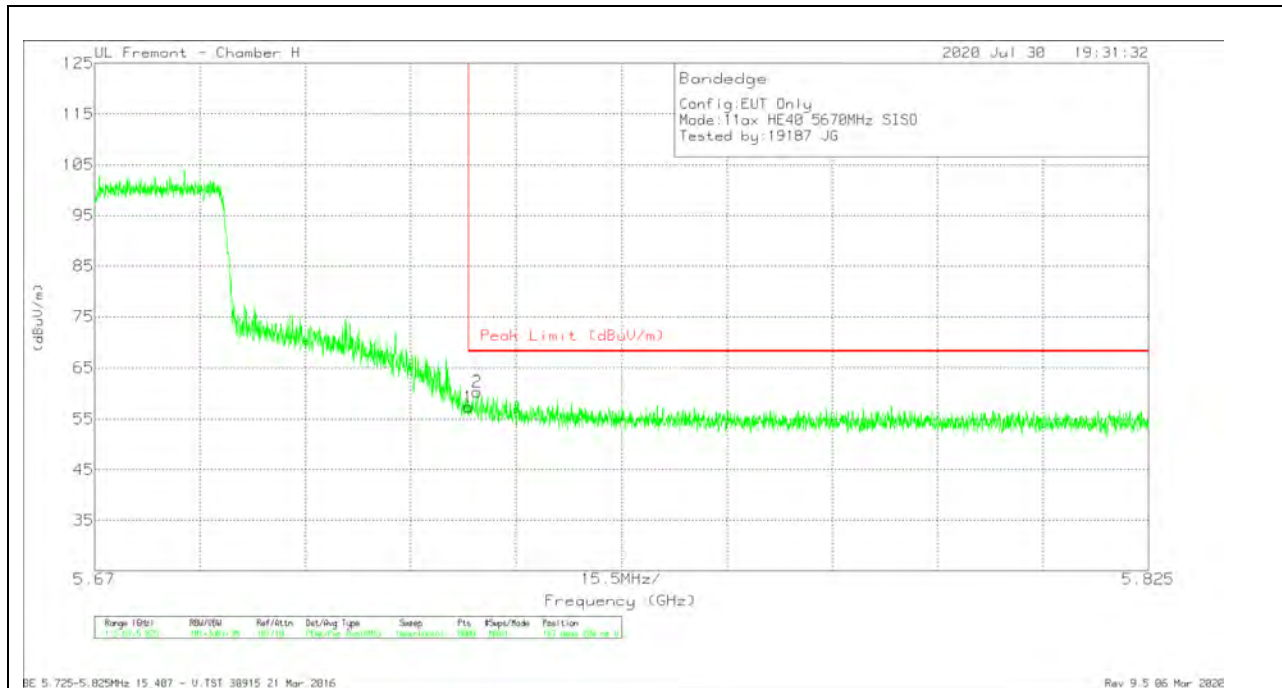


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	43.45	Pk	35	-21.1	57.35	68.2	-10.85	187	204	V
2	5.72629	46.49	Pk	34.9	-21.1	60.29	68.2	-7.91	187	204	V

Pk - Peak detector

1TX Antenna 6 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

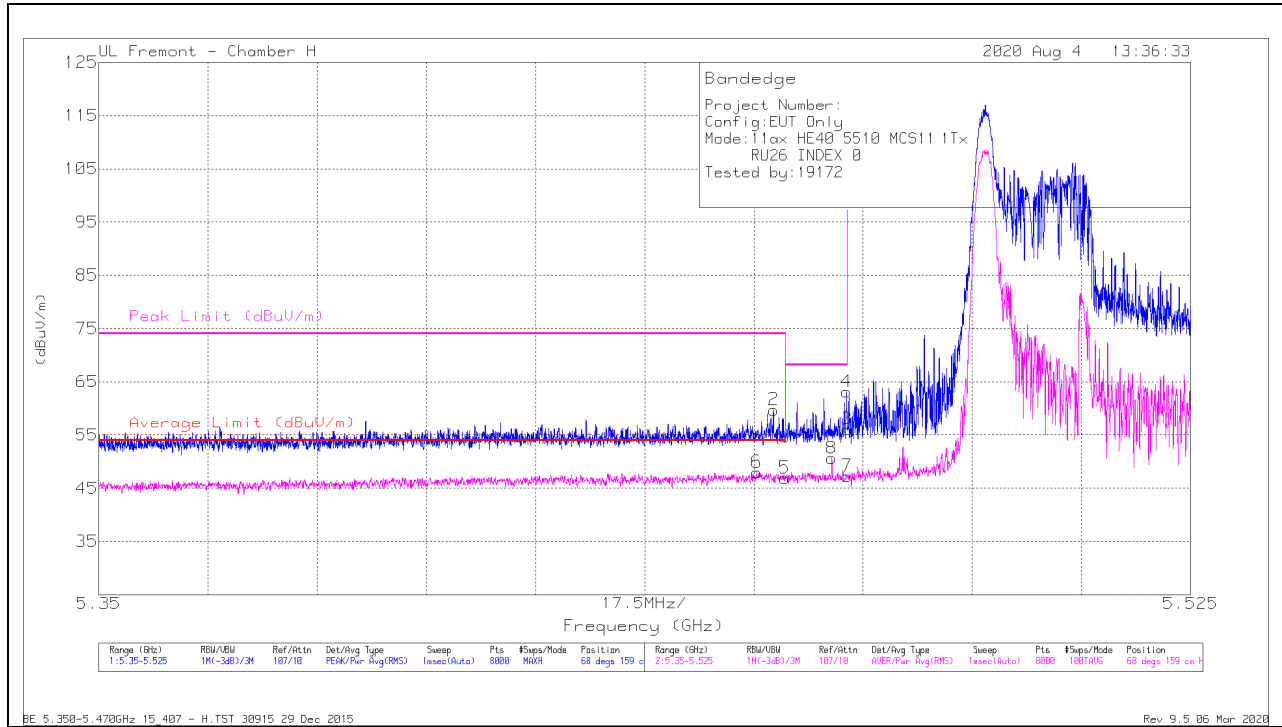

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CbI/Fltr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.39	Pk	35.2	-20.9	54.69	-	-	74	-19.31	68	159	H
2	* 5.45814	45.34	Pk	35.3	-20.9	59.74	-	-	74	-14.26	68	159	H
5	* 5.45998	32.58	RMS	35.2	-20.9	46.88	54	-7.12	-	-	68	159	H
6	* 5.45545	33.59	RMS	35.3	-20.9	47.99	54	-6.01	-	-	68	159	H
8	5.46748	36.22	RMS	35.3	-20.9	50.62	-	-	-	-	68	159	H
4	5.46985	48.8	Pk	35.3	-21	63.1	-	-	68.2	-5.1	68	159	H
3	5.46998	41.79	Pk	35.3	-21	56.09	-	-	68.2	-12.11	68	159	H
7	5.46998	32.96	RMS	35.3	-21	47.26	-	-	-	-	68	159	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

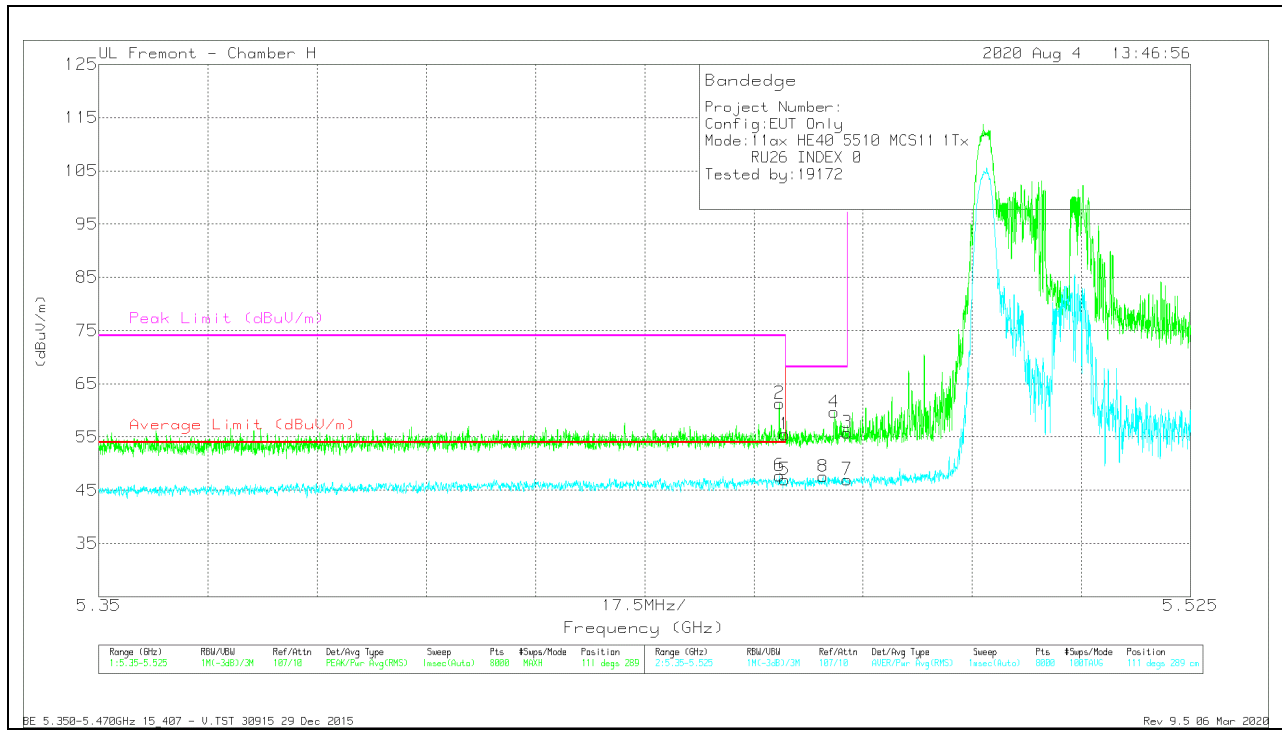


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Paid (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.19	Pk	35.2	-20.9	55.49	-	-	74	-18.51	111	289	V
2	* 5.45908	46.93	Pk	35.3	-20.9	61.33	-	-	74	-12.67	111	289	V
5	* 5.45998	32.7	RMS	35.2	-20.9	47	54	-7	-	-	111	289	V
6	* 5.45908	33.36	RMS	35.3	-20.9	47.76	54	-6.24	-	-	111	289	V
8	5.46608	33.28	RMS	35.2	-20.9	47.58	-	-	-	-	111	289	V
4	5.46786	45.29	Pk	35.3	-20.9	59.69	-	-	68.2	-8.51	111	289	V
3	5.46998	41.52	Pk	35.3	-21	55.82	-	-	68.2	-12.38	111	289	V
7	5.46998	32.73	RMS	35.3	-21	47.03	-	-	-	-	111	289	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna 6 MODE – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

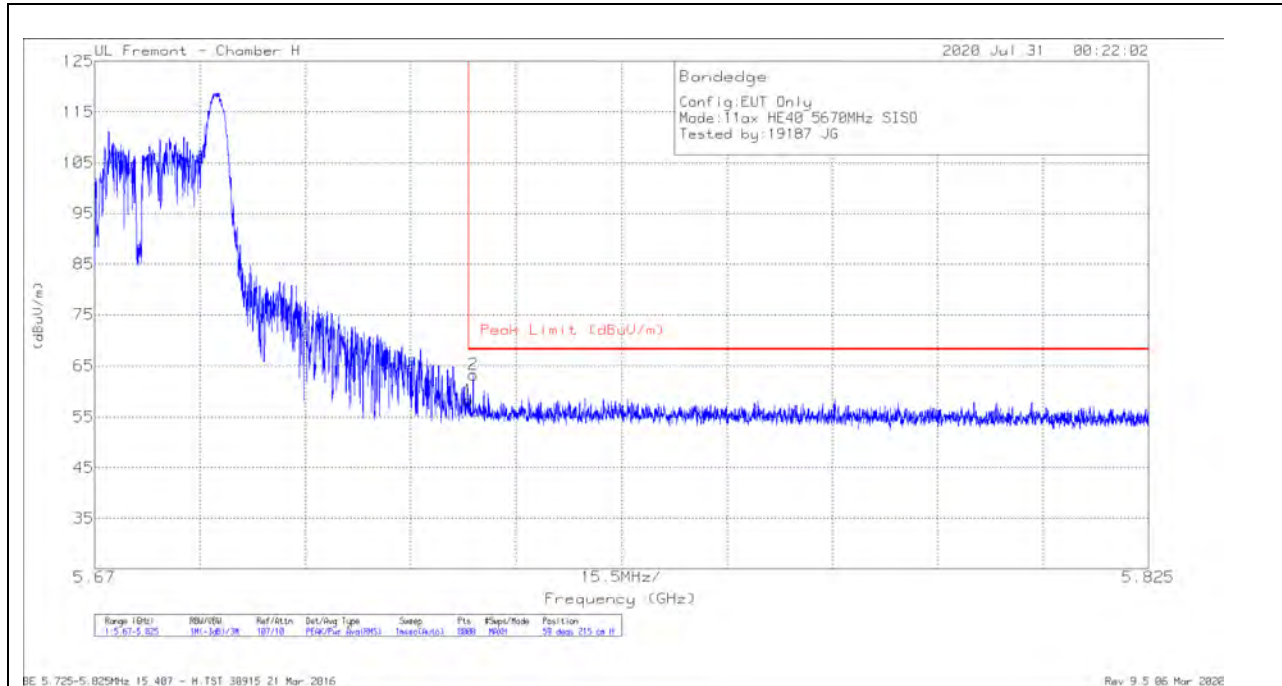

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	44.39	Pk	35	-21.1	58.29	68.2	-9.91	59	215	H
2	5.72569	49.42	Pk	34.9	-21.1	63.22	68.2	-4.98	59	215	H

Pk - Peak detector

VERTICAL RESULT

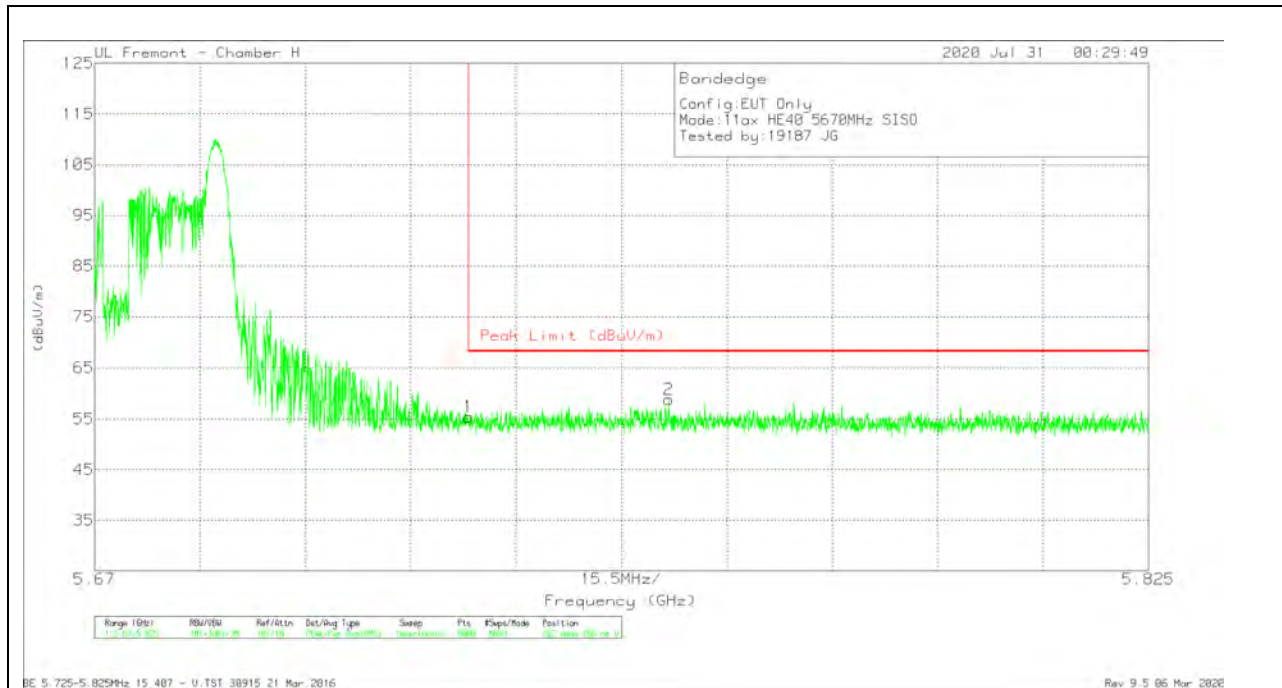


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	41.54	Pk	35	-21.1	55.44	68.2	-12.76	262	266	V
2	5.75443	44.8	Pk	35	-21	58.8	68.2	-9.4	262	266	V

Pk - Peak detector

2TX Antenna 5 + Antenna 6 OFDMA MODE – 484 Tones, RU Index 65

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

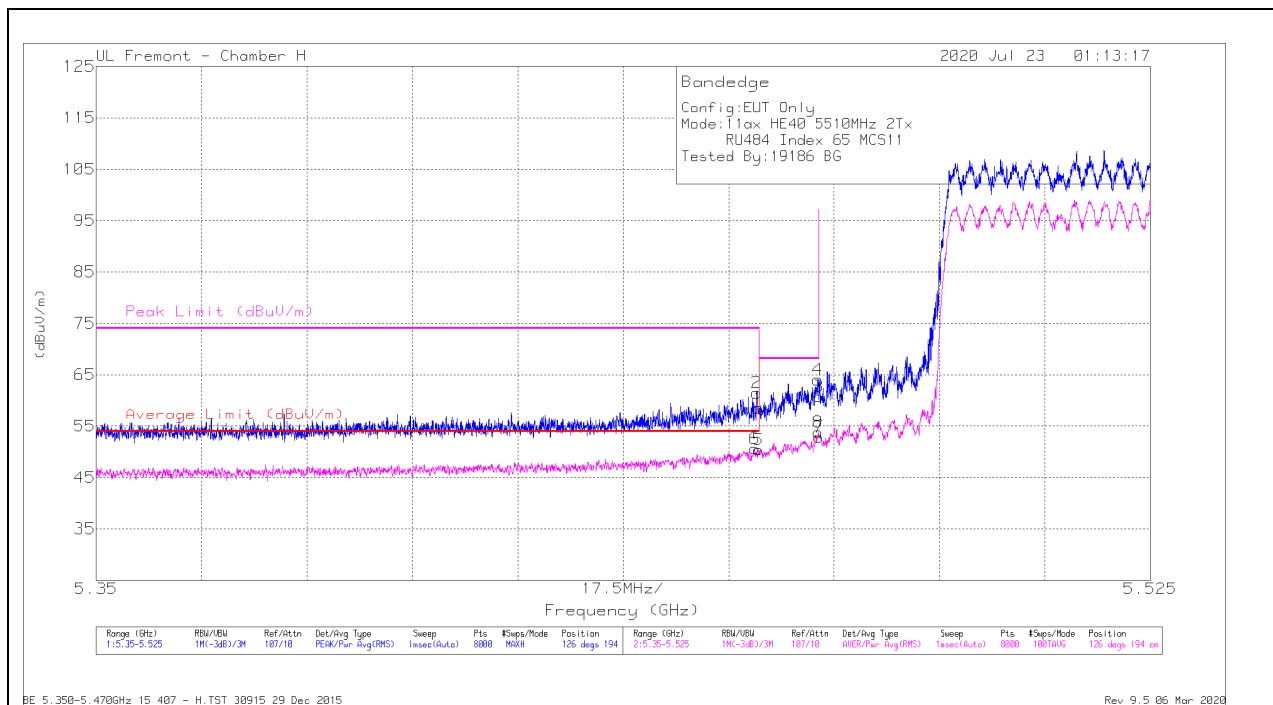

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	44.25	Pk	35.2	-20.9	58.55	-	-	74	-15.45	126	194	H
2	* 5.45967	47.19	Pk	35.2	-20.9	61.49	-	-	74	-12.51	126	194	H
5	* 5.45998	36.09	RMS	35.2	-20.9	5.39	54	-3.61	-	-	126	194	H
6	* 5.45993	36.34	RMS	35.2	-20.9	50.64	54	-3.36	-	-	126	194	H
4	5.4698	49.76	Pk	35.3	-21	64.06	-	-	68.2	-4.14	126	194	H
8	5.46987	39.52	RMS	35.3	-21	53.82	-	-	-	-	126	194	H
3	5.46998	46.47	Pk	35.3	-21	60.77	-	-	68.2	-7.43	126	194	H
7	5.46998	38.57	RMS	35.3	-21	52.87	-	-	-	-	126	194	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

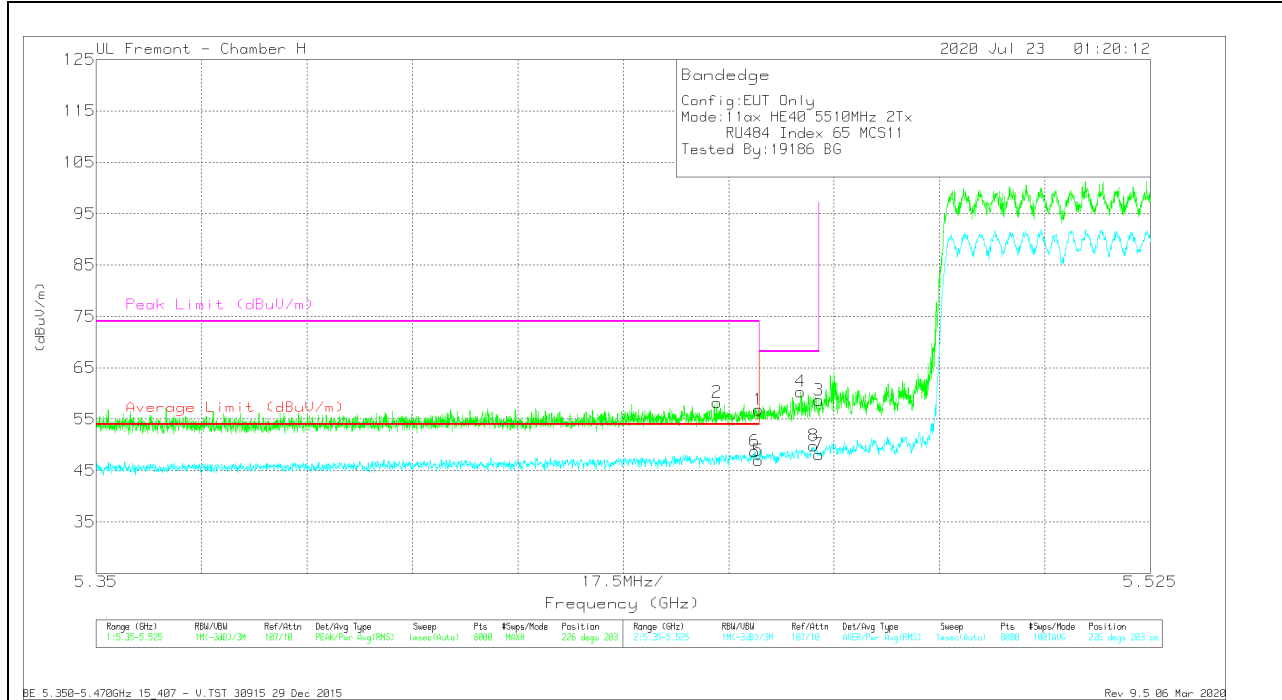


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.55	Pk	35.2	-20.9	56.85	-	-	74	-17.15	226	203	V
2	* 5.45305	43.98	Pk	35.2	-20.9	58.28	-	-	74	-15.72	226	203	V
5	* 5.45998	32.66	RMS	35.2	-20.9	46.96	54	-7.04	-	-	226	203	V
6	* 5.45935	34.46	RMS	35.2	-20.9	48.76	54	-5.24	-	-	226	203	V
4	5.46694	45.97	Pk	35.3	-20.9	60.37	-	-	68.2	-7.83	226	203	V
8	5.4691	35.54	RMS	35.3	-21	49.84	-	-	-	-	226	203	V
3	5.46998	44.37	Pk	35.3	-21	58.67	-	-	68.2	-9.53	226	203	V
7	5.46998	33.8	RMS	35.3	-21	48.1	-	-	-	-	226	203	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 5 + Antenna 6 OFDMA MODE – 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

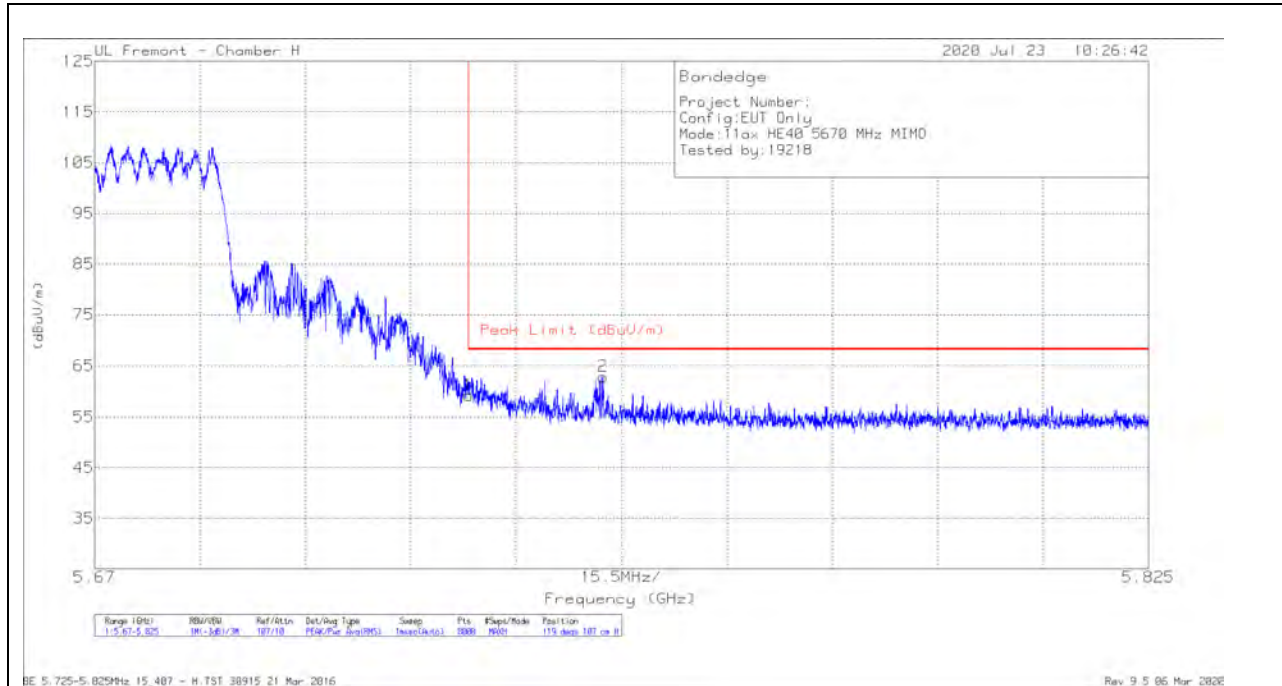

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.37	Pk	35	-21.1	59.27	68.2	-8.93	119	107	H
2	5.74474	48.93	Pk	35	-21	62.93	68.2	-5.27	119	107	H

Pk - Peak detector

VERTICAL RESULT

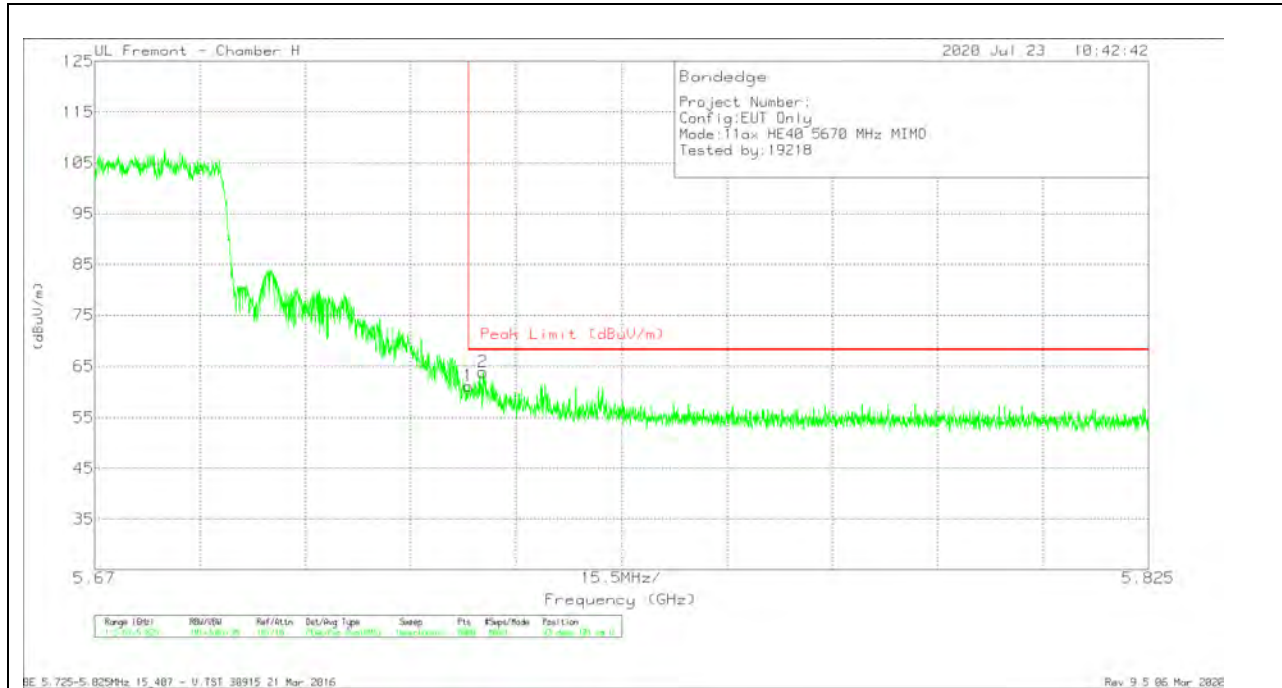


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.32	Pk	35	-21.1	61.22	68.2	-6.98	93	101	V
2	5.72712	50.04	Pk	34.9	-21.1	63.84	68.2	-4.36	93	101	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

484 Tones, RU index 65 RESULTS

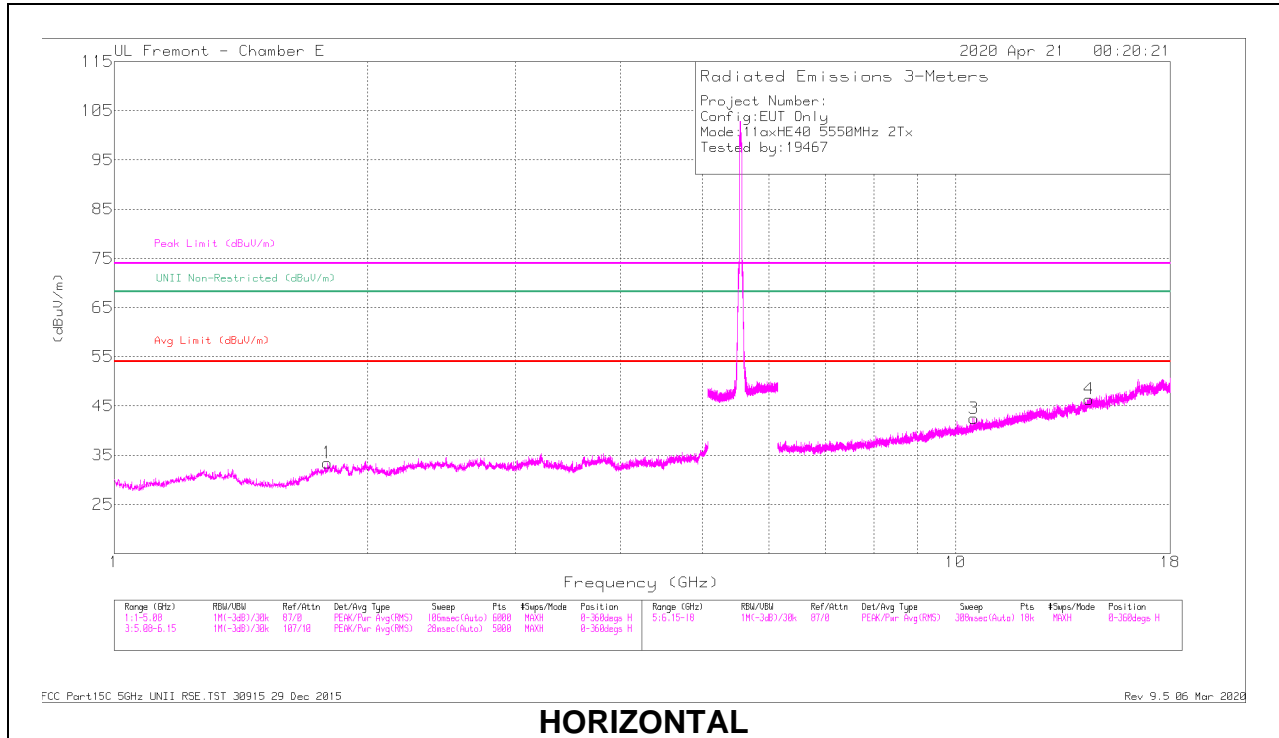

HORIZONTAL

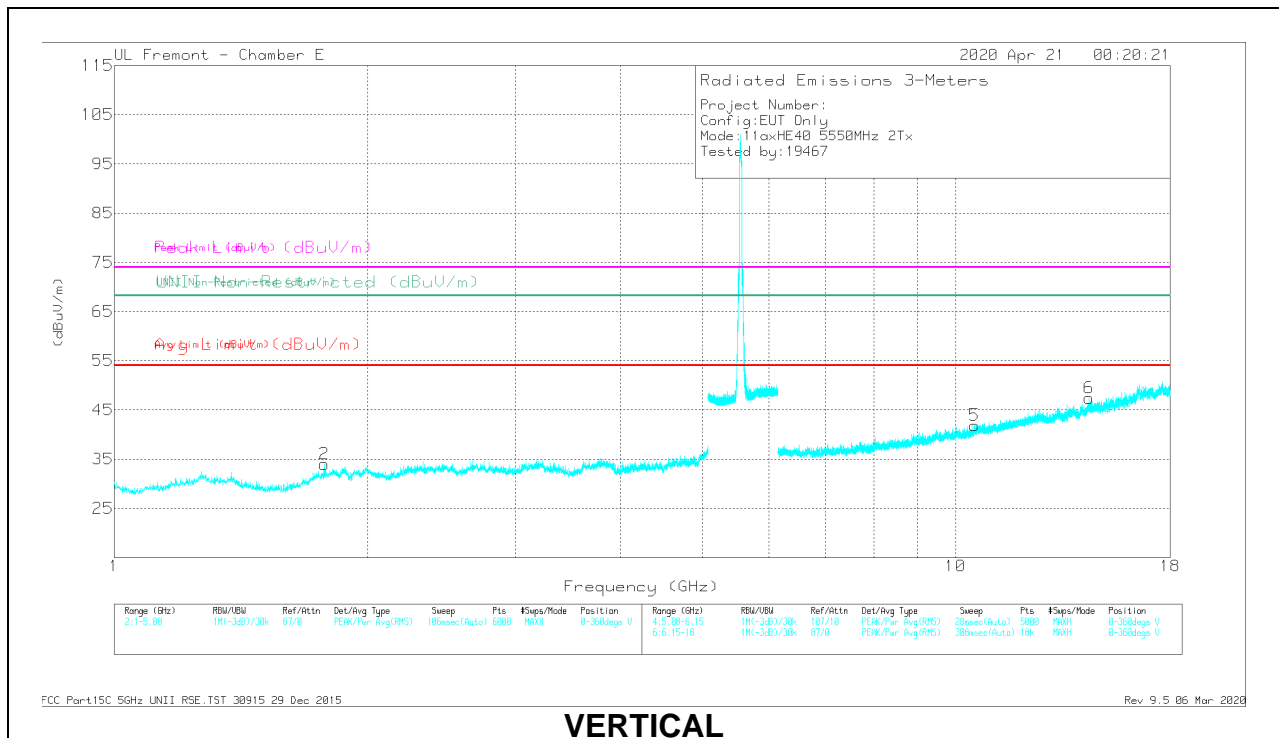

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Flt r/Pad (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.77677	45.03	PK-U	30.3	-35.2	40.13	68.2	-28.07	0	101	V
	1.77694	33.22	ADR	30.3	-35.2	28.32	-	-	0	101	V
1	1.79234	32.97	ADR	30.4	-35	28.37	-	-	0	200	H
	1.7949	44.45	PK-U	30.5	-35	39.95	68.2	-28.25	0	200	H
3	10.52037	26.09	ADR	37.5	-26.3	37.29	-	-	0	101	H
	10.52085	37.11	PK-U	37.5	-26.3	48.31	68.2	-19.89	0	101	H
5	10.53851	25.3	ADR	37.6	-26.1	36.8	-	-	113	199	V
	10.53916	37.05	PK-U	37.6	-26.1	48.55	68.2	-19.65	113	199	V
6	14.40737	24.15	ADR	39.3	-21.2	42.25	-	-	113	199	V
	14.40815	34.92	PK-U	39.3	-21.3	52.92	68.2	-15.28	113	199	V
4	14.41912	23.59	ADR	39.3	-21.3	41.59	-	-	88	199	H
	14.41958	35.77	PK-U	39.4	-21.3	53.87	68.2	-14.33	88	199	H

PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

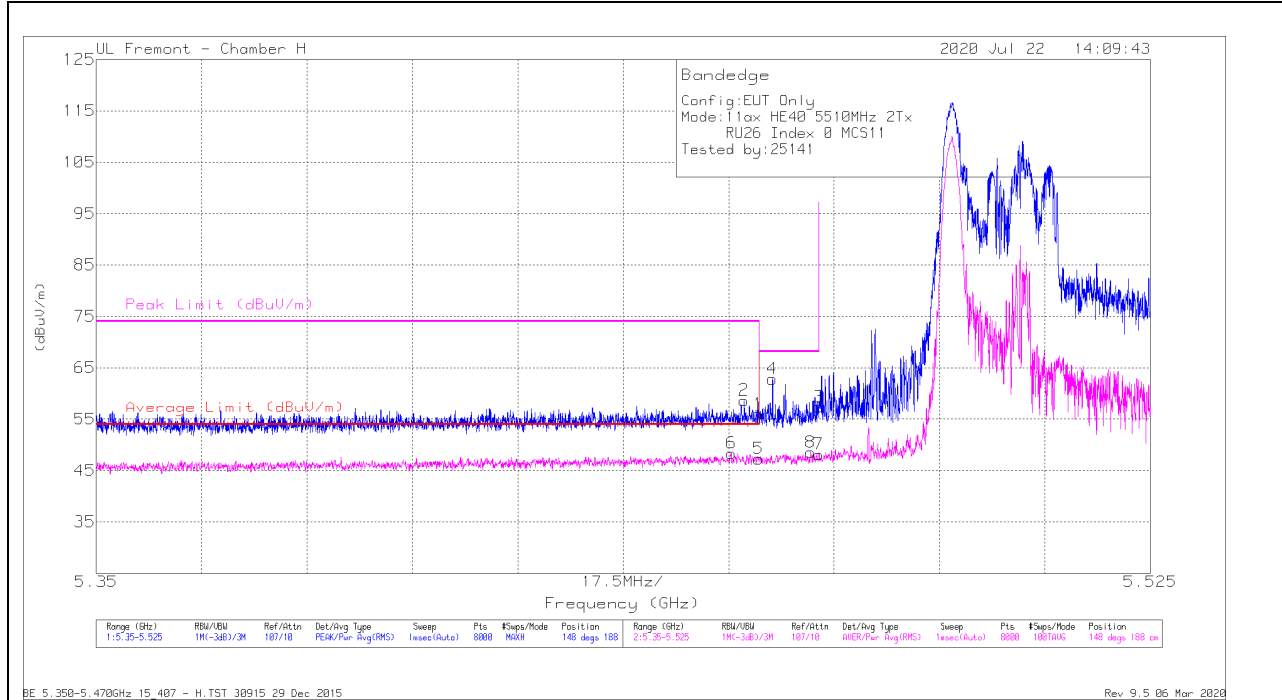

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.72	Pk	35.2	-20.9	56.02	-	-	74	-17.98	148	188	H
2	* 5.45757	44.24	Pk	35.3	-20.9	58.64	-	-	74	-15.36	148	188	H
5	* 5.45998	33	RMS	35.2	-20.9	47.3	54	-6.7	-	-	148	188	H
6	* 5.45543	33.98	RMS	35.3	-20.9	48.38	54	-5.62	-	-	148	188	H
4	5.46228	48.53	Pk	35.2	-20.9	62.83	-	-	68.2	-5.37	148	188	H
8	5.46862	34.27	RMS	35.3	-21	48.57	-	-	-	-	148	188	H
3	5.46998	43.06	Pk	35.3	-21	57.36	-	-	68.2	-10.84	148	188	H
7	5.46998	33.84	RMS	35.3	-21	48.14	-	-	-	-	148	188	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

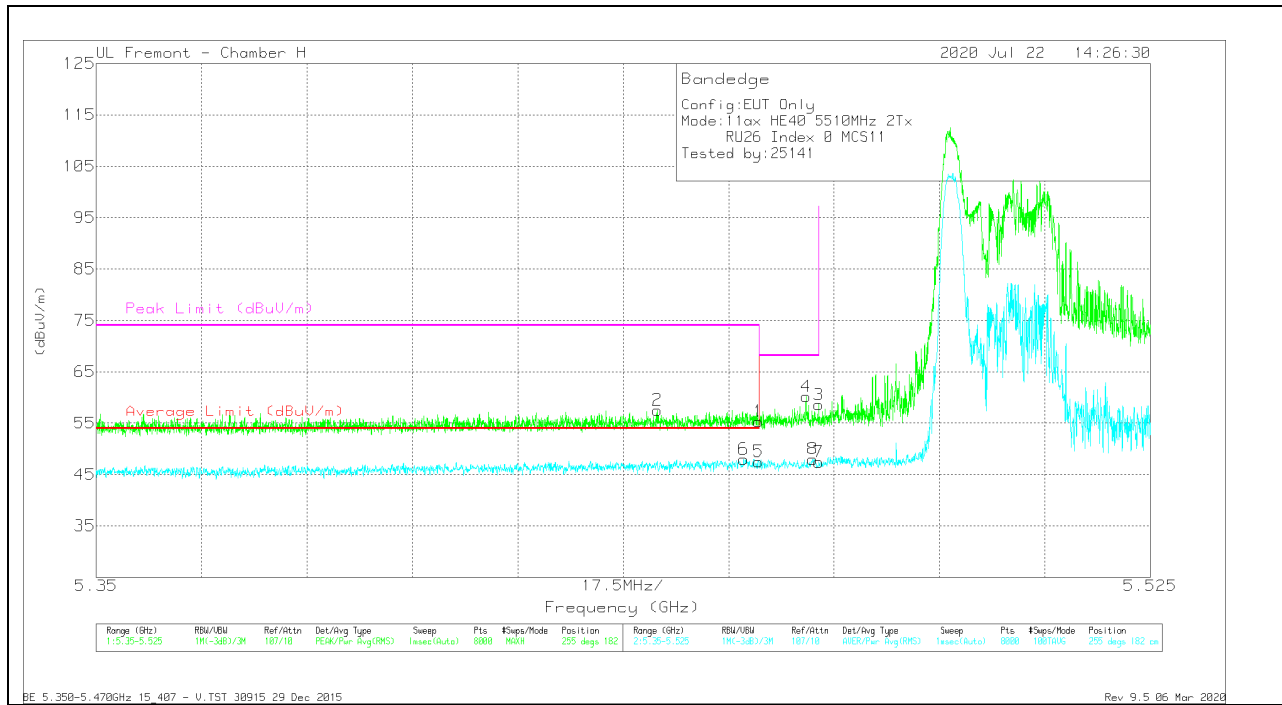


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Fltr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.01	Pk	35.2	-20.9	55.31	-	-	74	-18.69	255	182	V
2	* 5.44313	43.24	Pk	35.1	-20.8	57.54	-	-	74	-16.46	255	182	V
5	* 5.45998	33.22	RMS	35.2	-20.9	47.52	54	-6.48	-	-	255	182	V
6	* 5.45749	33.59	RMS	35.3	-20.9	47.99	54	-6.01	-	-	255	182	V
4	5.46786	45.77	Pk	35.3	-20.9	60.17	-	-	68.2	-8.03	255	182	V
8	5.46897	33.72	RMS	35.3	-21	48.02	-	-	-	-	255	182	V
3	5.46998	44.29	Pk	35.3	-21	58.59	-	-	68.2	-9.61	255	182	V
7	5.46998	33.12	RMS	35.3	-21	47.42	-	-	-	-	255	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 5 + Antenna 6 OFDMA MODE – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

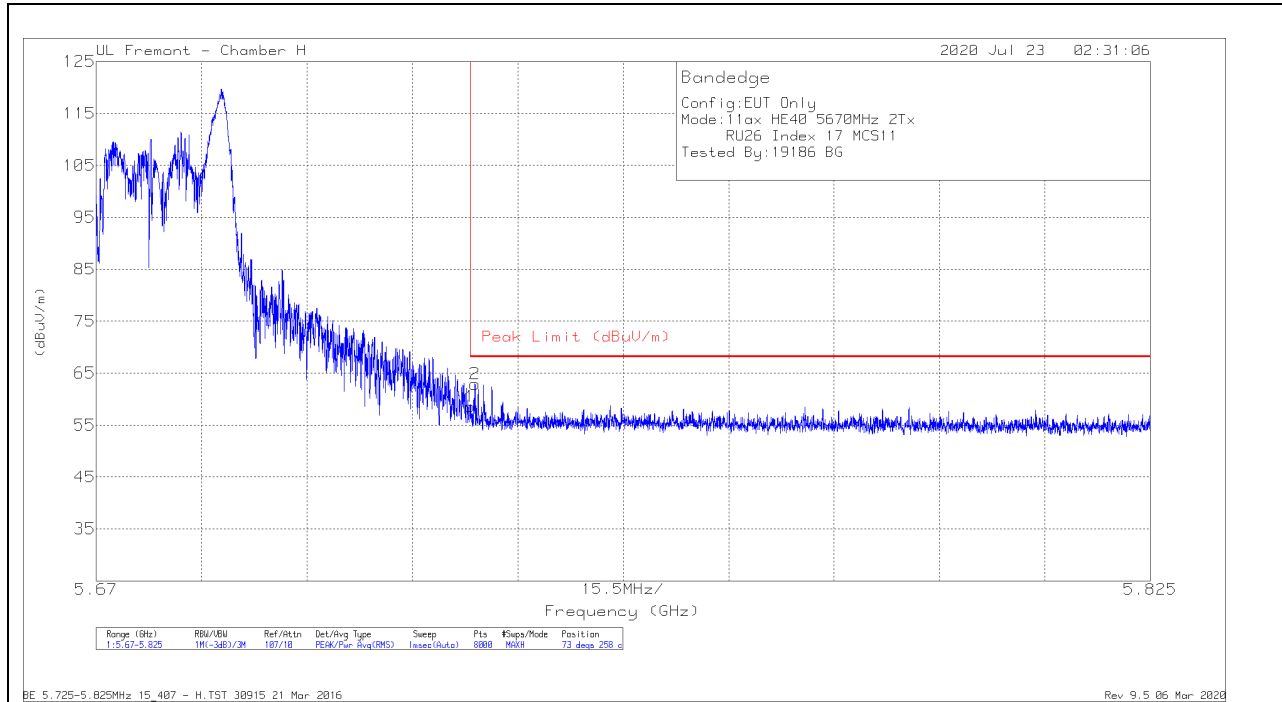

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	44.69	Pk	35	-21.1	58.59	68.2	-9.61	73	258	H
2	5.72569	49.1	Pk	34.9	-21.1	62.9	68.2	-5.3	73	258	H

Pk - Peak detector

VERTICAL RESULT

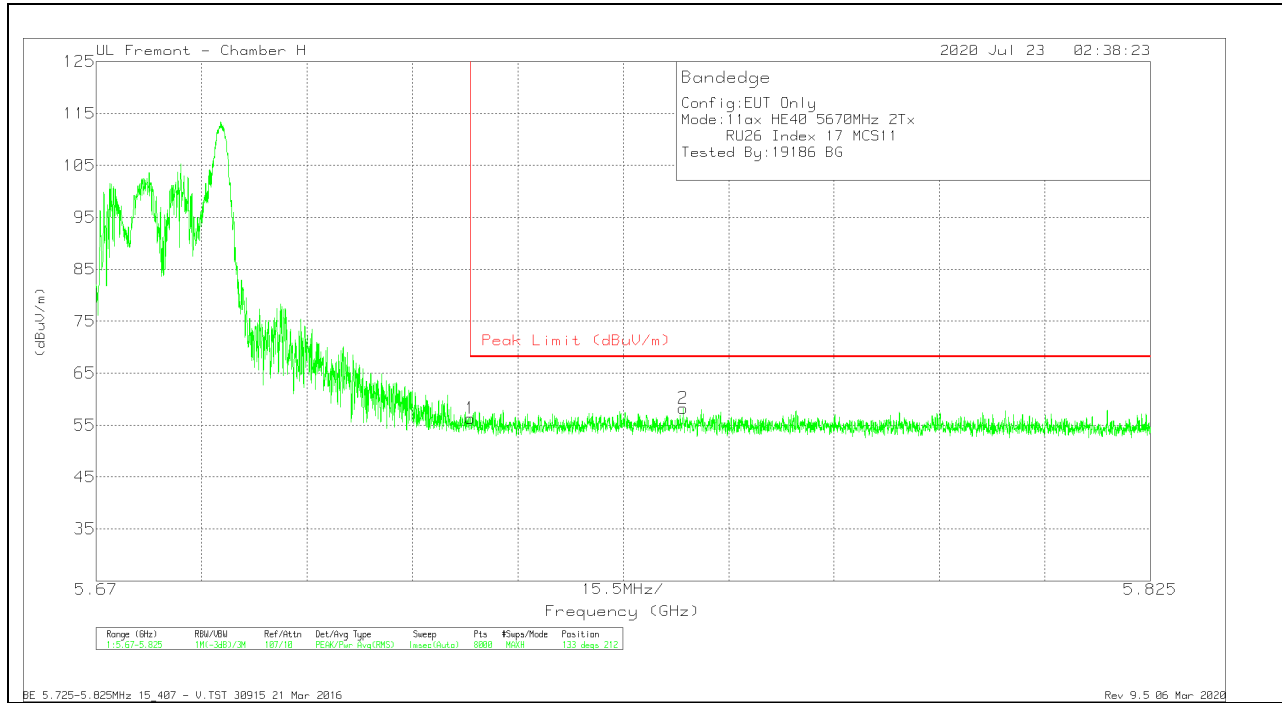


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	42.4	Pk	35	-21.1	56.3	68.2	-11.9	133	212	V
2	5.75631	44.15	Pk	35	-20.9	58.25	68.2	-9.95	133	212	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

26 Tones, RU Index 17 RESULTS

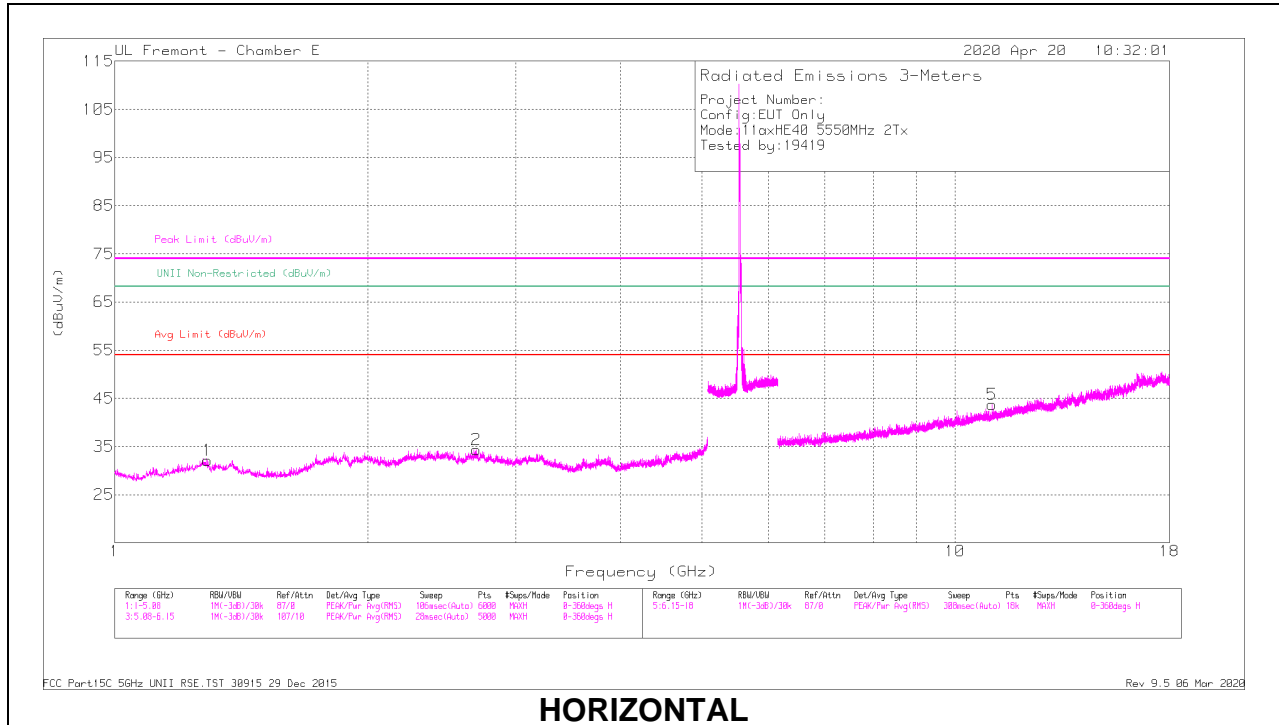

HORIZONTAL

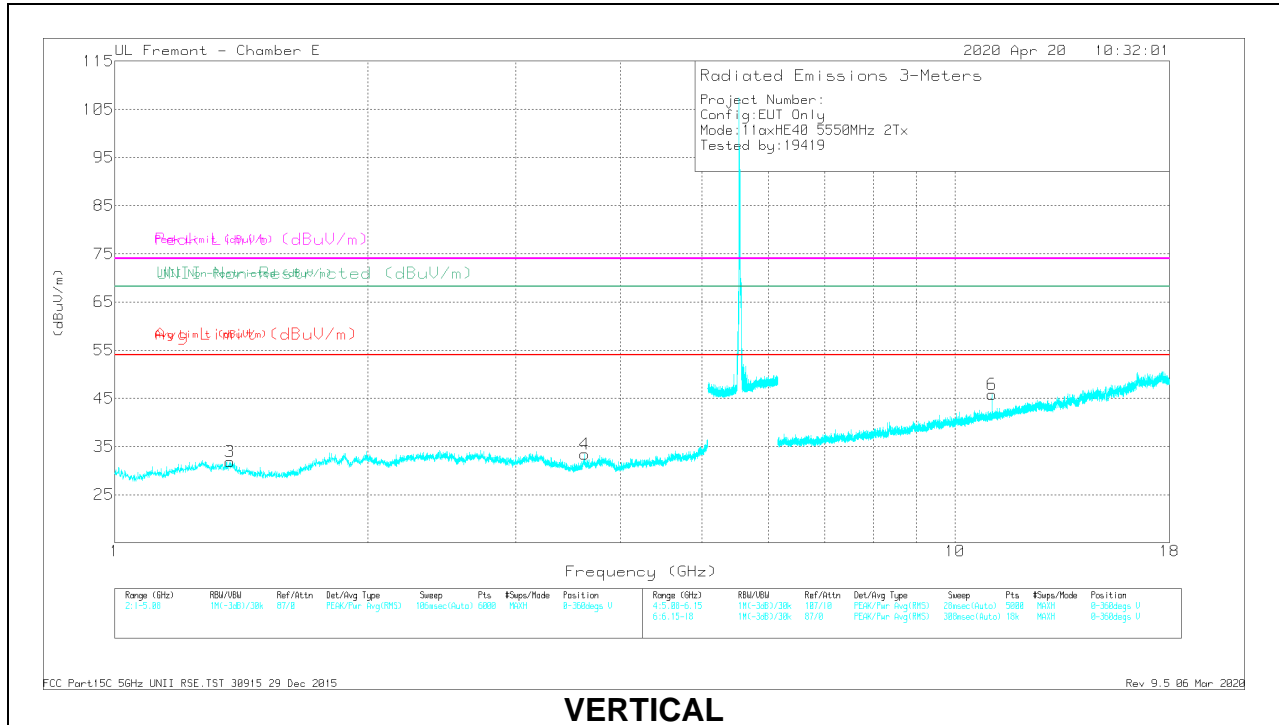

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Peak (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarization
1	* 1.2897	44.32	PK-U	29.6	-34.9	39.02	-	-	74	-34.98	-	-	219	136	H
	* 1.28781	32.51	ADR	29.6	-34.9	27.21	54	-26.79	-	-	-	-	219	136	H
2	* 2.69235	45.63	PK-U	32.6	-35.6	42.63	-	-	74	-31.37	-	-	120	372	H
	* 2.69177	33.59	ADR	32.6	-35.6	30.59	54	-23.41	-	-	-	-	120	372	H
3	* 1.37013	44.44	PK-U	29.8	-35.3	38.94	-	-	74	-35.06	-	-	199	124	V
	* 1.37117	32.68	ADR	29.8	-35.4	27.08	54	-26.92	-	-	-	-	199	124	V
4	* 3.62359	43.86	PK-U	33.5	-34.2	43.16	-	-	74	-30.84	-	-	94	370	V
	* 3.62371	31.3	ADR	33.5	-34.2	30.6	54	-23.4	-	-	-	-	94	370	V
5	* 11.06433	39.21	PK-U	37.7	-25.3	51.61	-	-	74	-22.39	-	-	287	106	H
	* 11.06386	28	ADR	37.7	-25.3	40.4	54	-13.6	-	-	-	-	287	106	H
6	* 11.06453	42.23	PK-U	37.7	-25.3	54.63	-	-	74	-19.97	-	-	318	102	V
	* 11.06431	30.61	ADR	37.7	-25.3	43.01	54	-10.99	-	-	-	-	318	102	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.1.18. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6 GHz BAND

1TX Antenna 5 MODE – MCS 11, 996 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

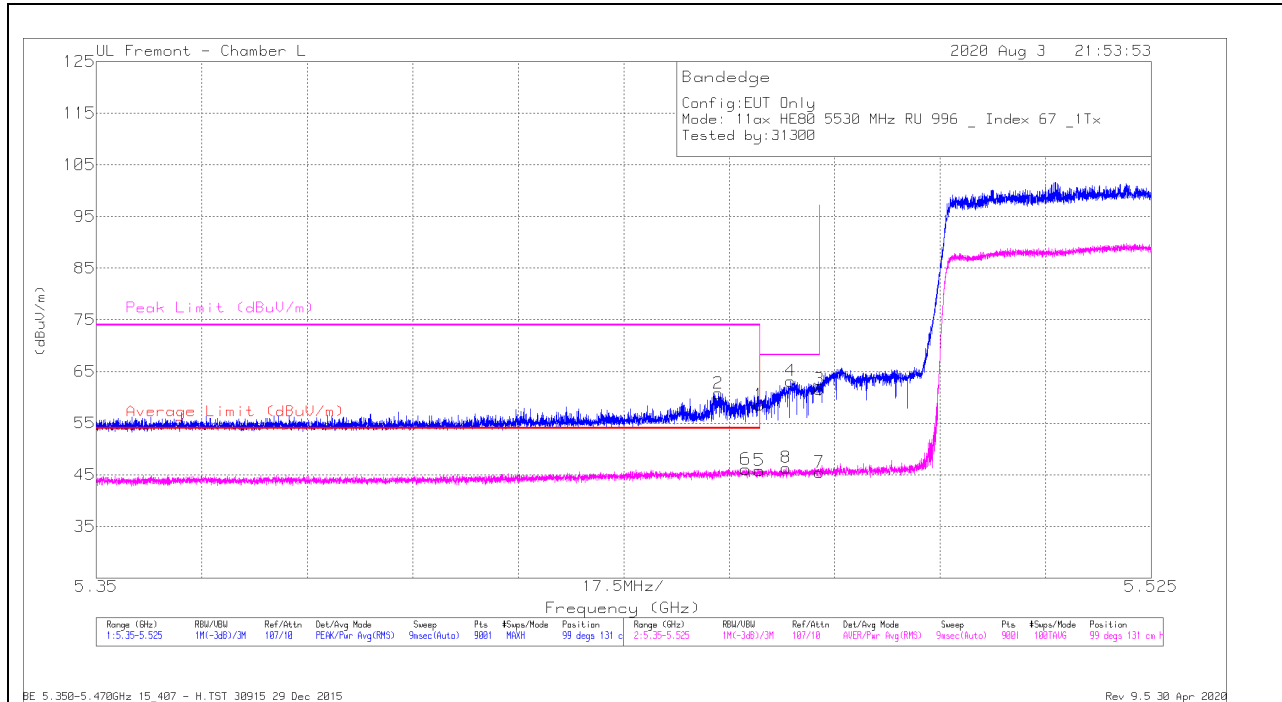

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	40.85	Pk	34.6	-16.9	0	58.55	-	-	74	-15.45	99	131	H
2	* 5.45317	43.05	Pk	34.6	-16.9	0	60.75	-	-	74	-13.25	99	131	H
3	5.46999	43.85	Pk	34.6	-16.9	0	61.55	-	-	68.2	-6.65	99	131	H
4	5.46517	45.56	Pk	34.5	-16.9	0	63.16	-	-	68.2	-5.04	99	131	H
5	* 5.45999	27.97	RMS	34.6	-16.9	0	45.67	54	-8.33	-	-	99	131	H
6	* 5.45772	28.13	RMS	34.7	-16.9	0	45.93	54	-8.07	-	-	99	131	H
7	5.46999	27.59	RMS	34.6	-16.9	0	45.29	-	-	-	-	99	131	H
8	5.46443	28.58	RMS	34.5	-16.9	0	46.18	-	-	-	-	99	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

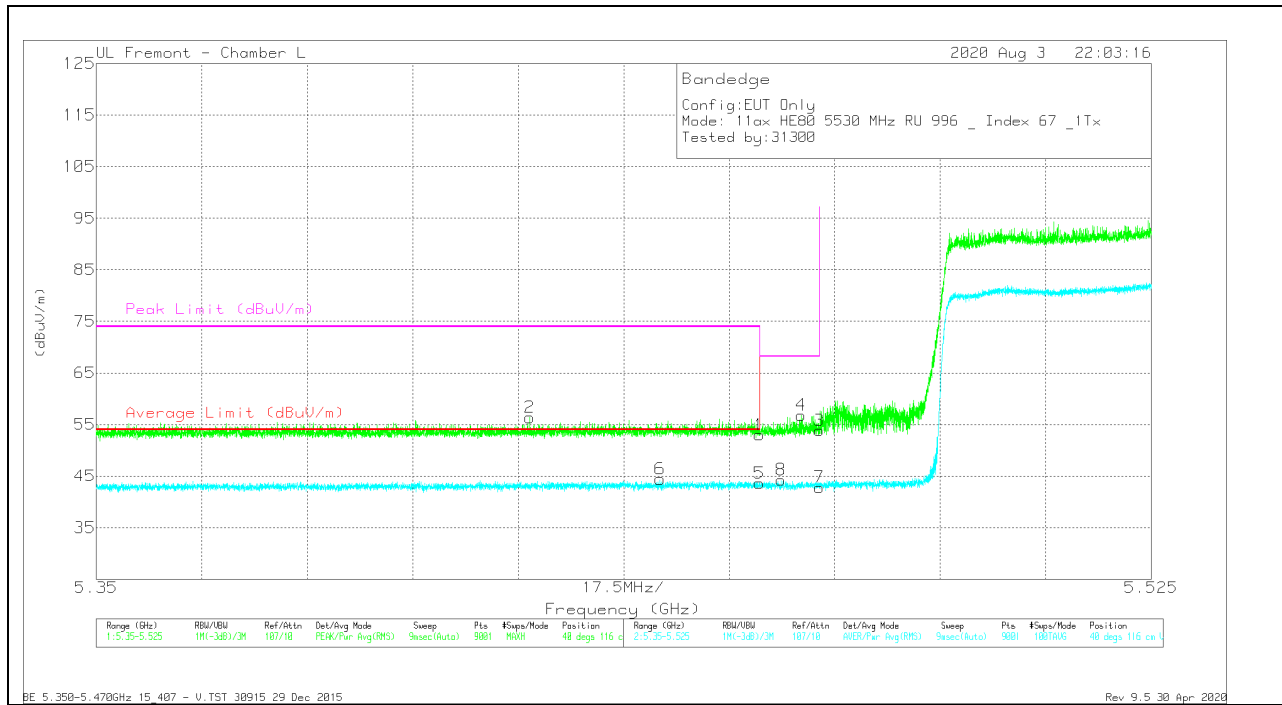


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	35.28	Pk	34.6	-16.9	52.98	-	-	74	-21.02	40	116	V
2	* 5.42192	38.76	Pk	34.5	-16.9	56.36	-	-	74	-17.64	40	116	V
3	5.46999	36.13	Pk	34.6	-16.9	53.83	-	-	68.2	-14.37	40	116	V
4	5.46994	39.12	Pk	34.6	-16.9	56.82	-	-	68.2	-11.38	40	116	V
5	* 5.45999	26.73	RMS	34.6	-16.9	43.43	54	-10.57	-	-	40	116	V
6	* 5.44353	26.57	RMS	34.6	-16.9	44.27	54	-9.73	-	-	40	116	V
7	5.46999	24.96	RMS	34.6	-16.9	42.66	-	-	-	-	40	116	V
8	5.46357	26.47	RMS	34.5	-16.9	44.07	-	-	-	-	40	116	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna 5 MODE –MCS 11, 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

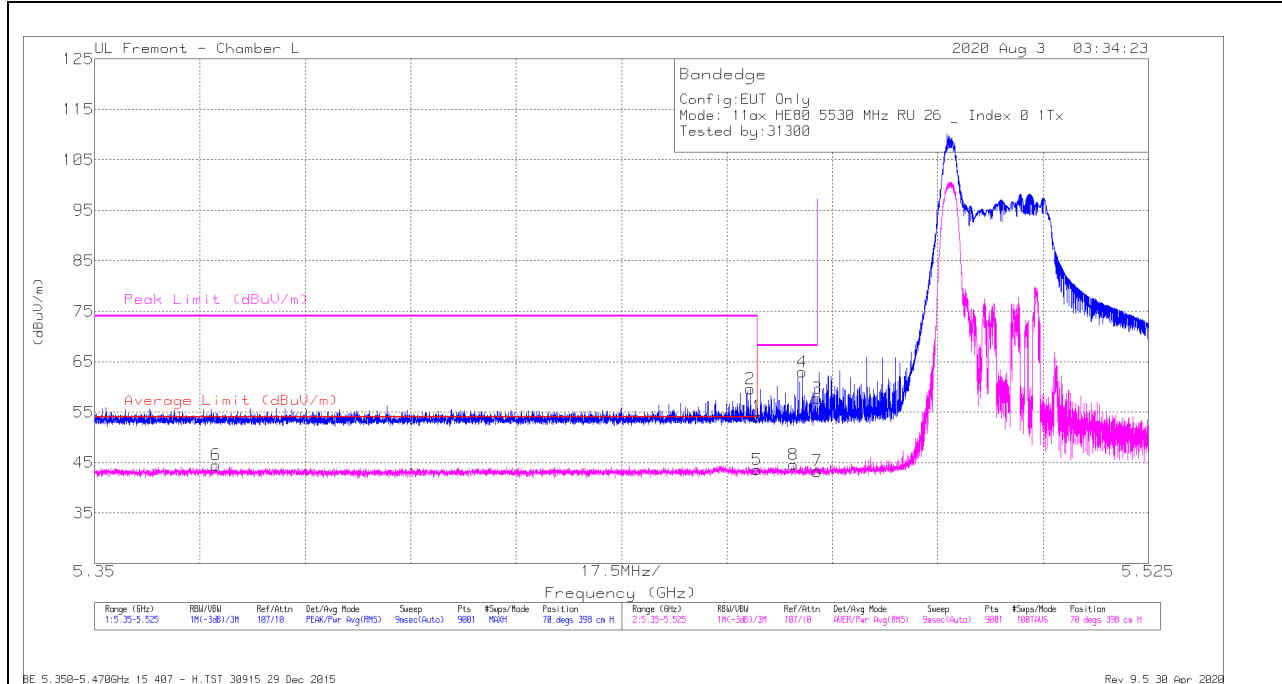

Marker	Frequency (GHz)	Meter Reading (dBu)	Det	AF 344 (dBm)	Amp/ChlFtr/Pad (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	36.47	Pk	34.6	-16.9	54.17	-	-	74	-19.83	70	398	H
2	* 5.45891	41.85	Pk	34.6	-16.9	59.55	-	-	74	-14.45	70	398	H
3	5.46999	40.06	Pk	34.6	-16.9	57.76	-	-	68.2	-10.44	70	398	H
4	5.46752	45.3	Pk	34.6	-16.9	63	-	-	68.2	-5.2	70	398	H
5	* 5.45999	25.71	RMS	34.6	-16.9	43.41	54	-10.59	-	-	70	398	H
6	* 5.37012	26.85	RMS	34.5	-17	44.35	54	-9.65	-	-	70	398	H
7	5.46999	25.41	RMS	34.6	-16.9	43.11	-	-	-	-	70	398	H
8	5.466	26.75	RMS	34.6	-16.9	44.45	-	-	-	-	70	398	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

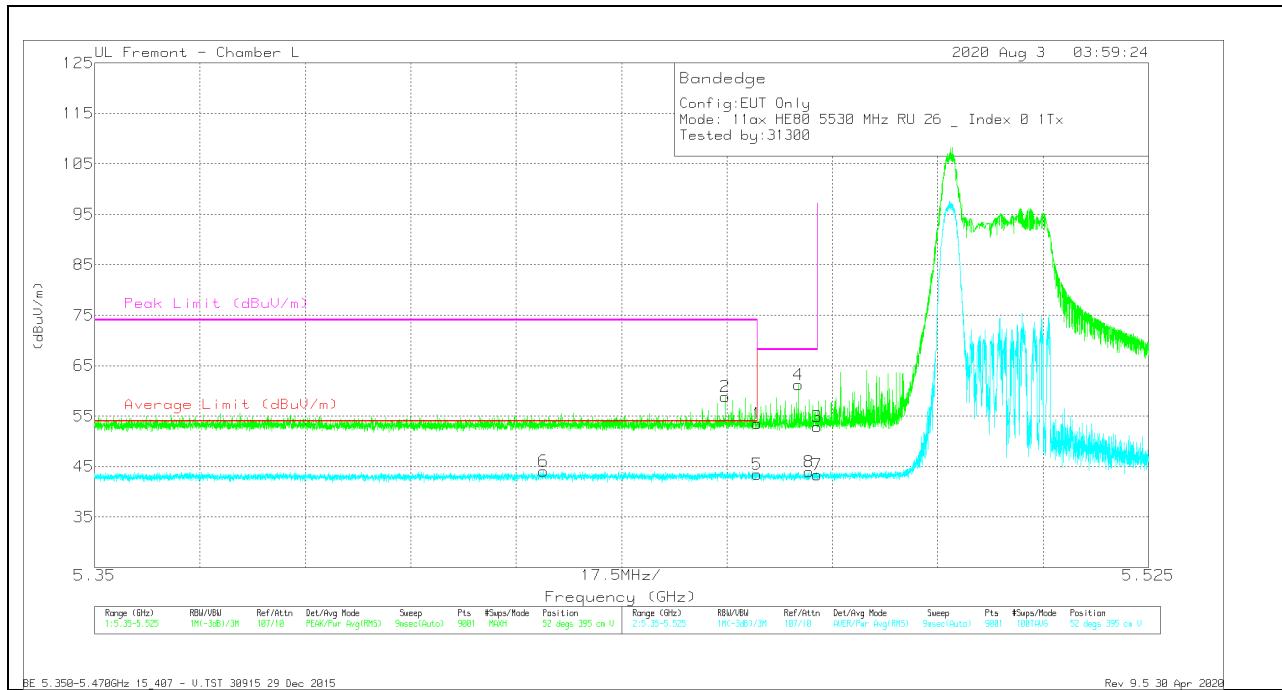


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Ch/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	35.81	Pk	34.6	-16.9	53.51	-	-	74	-20.49	52	395	V
2	* 5.45473	41.2	Pk	34.6	-16.9	58.9	-	-	74	-15.1	52	395	V
3	5.46999	35.22	Pk	34.6	-16.9	52.92	-	-	68.2	-15.28	52	395	V
4	5.46826	43.55	Pk	34.6	-16.9	61.25	-	-	68.2	-6.95	52	395	V
5	* 5.45999	25.64	RMS	34.6	-16.9	43.34	54	-10.66	-	-	52	395	V
6	* 5.42451	26.18	RMS	34.6	-16.9	43.68	54	-10.12	-	-	52	395	V
7	5.46999	25.48	RMS	34.6	-16.9	43.18	-	-	-	-	52	395	V
8	5.46861	26.05	RMS	34.6	-16.9	43.75	-	-	-	-	52	395	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna 6 MODE – 996 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

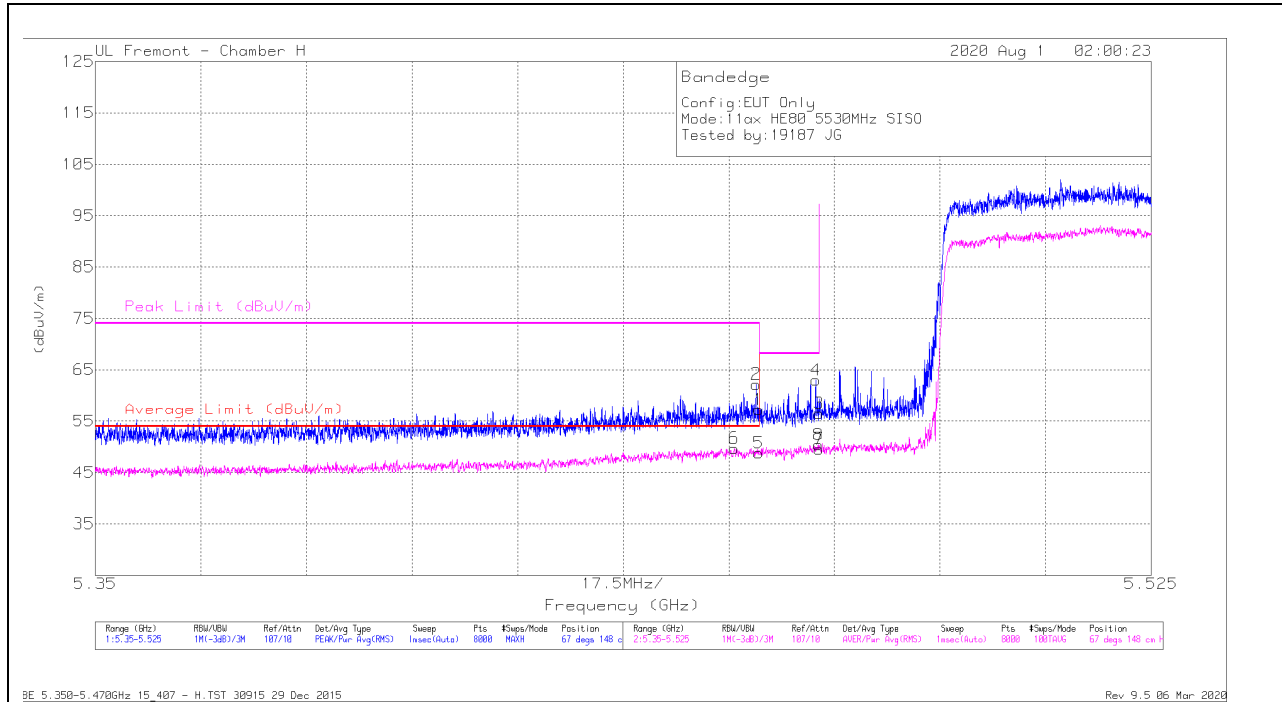

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.94	Pk	35.2	-20.9	57.24	-	-	74	-16.76	67	148	H
2	* 5.45952	47.87	Pk	35.2	-20.9	62.17	-	-	74	-11.83	67	148	H
5	* 5.45998	34.5	RMS	35.2	-20.9	48.8	54	-5.2	-	-	67	148	H
6	* 5.45589	35.32	RMS	35.3	-20.9	49.72	54	-4.28	-	-	67	148	H
4	5.46941	48.69	Pk	35.3	-21	62.99	-	-	68.2	-5.21	67	148	H
8	5.46987	36.1	RMS	35.3	-21	50.4	-	-	-	-	67	148	H
3	5.46998	42.21	Pk	35.3	-21	56.51	-	-	68.2	-11.69	67	148	H
7	5.46998	35.29	RMS	35.3	-21	49.59	-	-	-	-	67	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

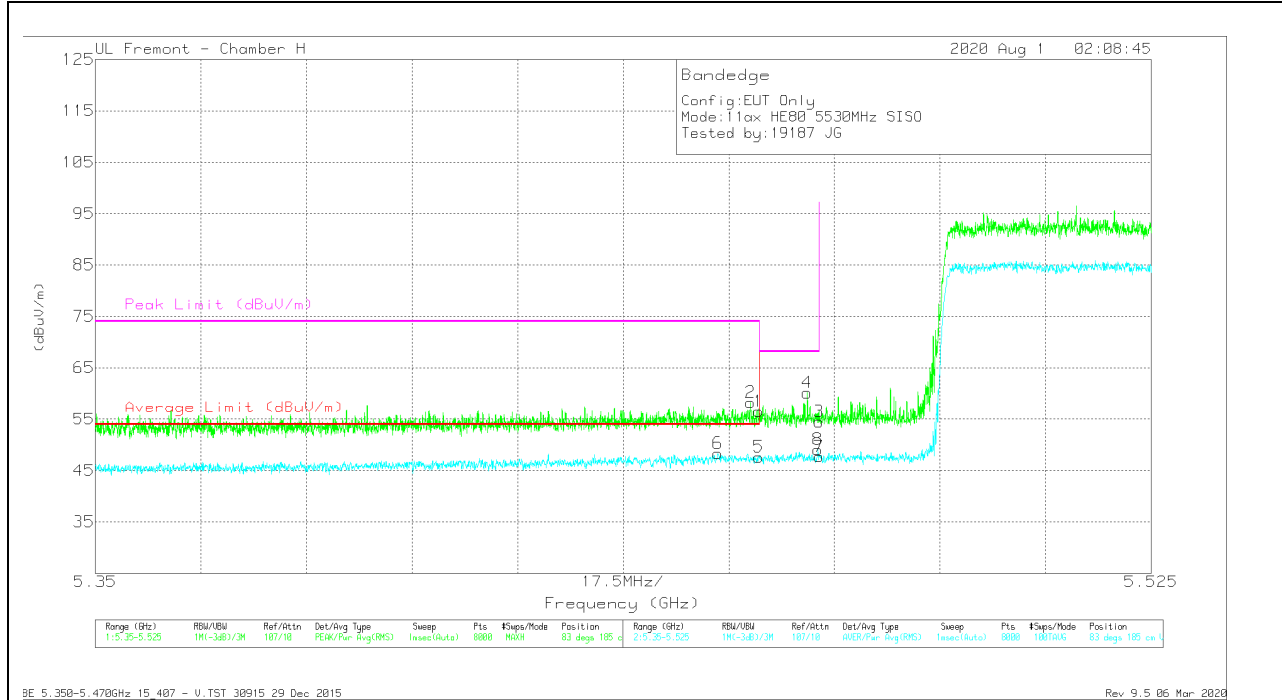


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.22	Pk	35.2	-20.9	56.52	-	-	74	-17.48	83	185	V
2	* 5.45858	43.84	Pk	35.3	-20.9	58.24	-	-	74	-15.76	83	185	V
5	* 5.45998	33.34	RMS	35.2	-20.9	47.64	54	-6.36	-	-	83	185	V
6	* 5.45315	34.04	RMS	35.2	-20.9	48.34	54	-5.66	-	-	83	185	V
4	5.46799	45.75	Pk	35.3	-20.9	60.15	-	-	68.2	-8.05	83	185	V
8	5.46976	34.8	RMS	35.3	-21	49.1	-	-	-	-	83	185	V
3	5.46998	40.23	Pk	35.3	-21	54.53	-	-	68.2	-13.67	83	185	V
7	5.46998	33.42	RMS	35.3	-21	47.72	-	-	-	-	83	185	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX Antenna 6 MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

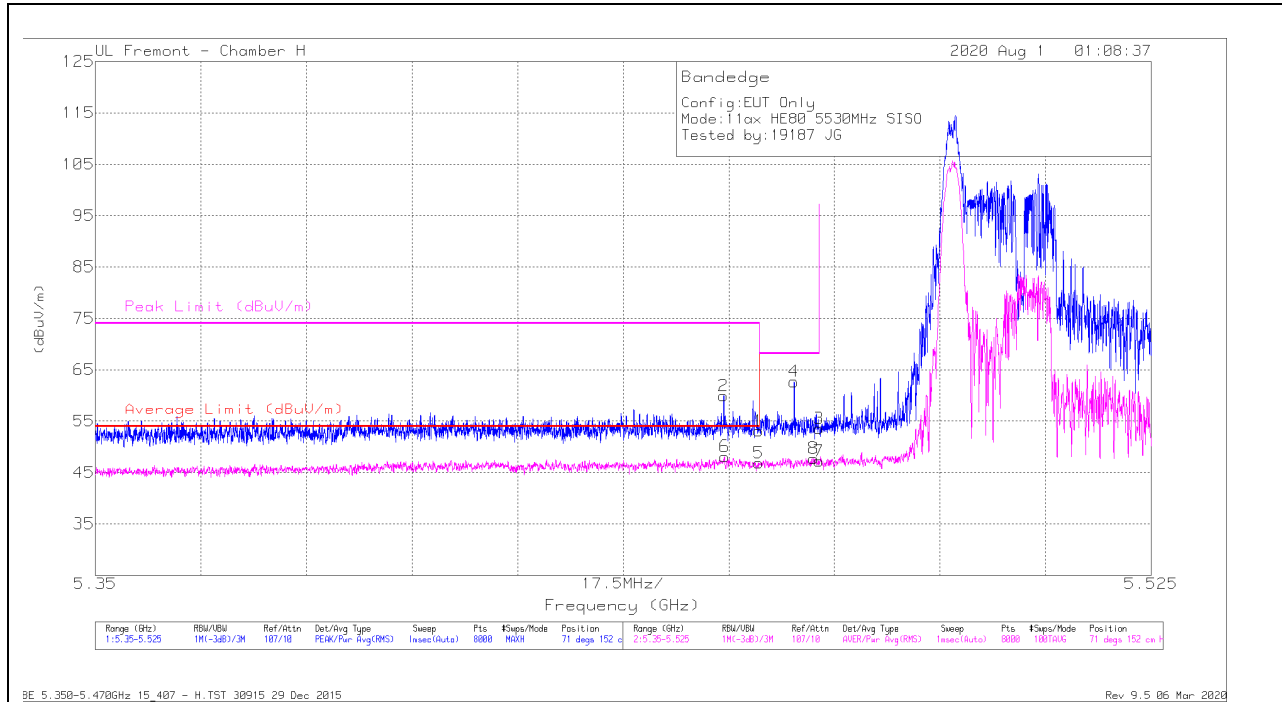

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	38.77	Pk	35.2	-20.9	53.07	-	-	74	-20.93	71	152	H
2	* 5.45414	45.64	Pk	35.2	-20.9	59.94	-	-	74	-14.06	71	152	H
5	* 5.45998	32.53	RMS	35.2	-20.9	46.83	54	-7.17	-	-	71	152	H
6	* 5.45429	33.79	RMS	35.2	-20.9	48.09	54	-5.91	-	-	71	152	H
4	5.46582	48.4	Pk	35.2	-20.9	62.7	-	-	68.2	-5.5	71	152	H
8	5.46906	33.44	RMS	35.3	-21	47.74	-	-	-	-	71	152	H
3	5.46998	39.26	Pk	35.3	-21	53.56	-	-	68.2	-14.64	71	152	H
7	5.46998	32.9	RMS	35.3	-21	47.2	-	-	-	-	71	152	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

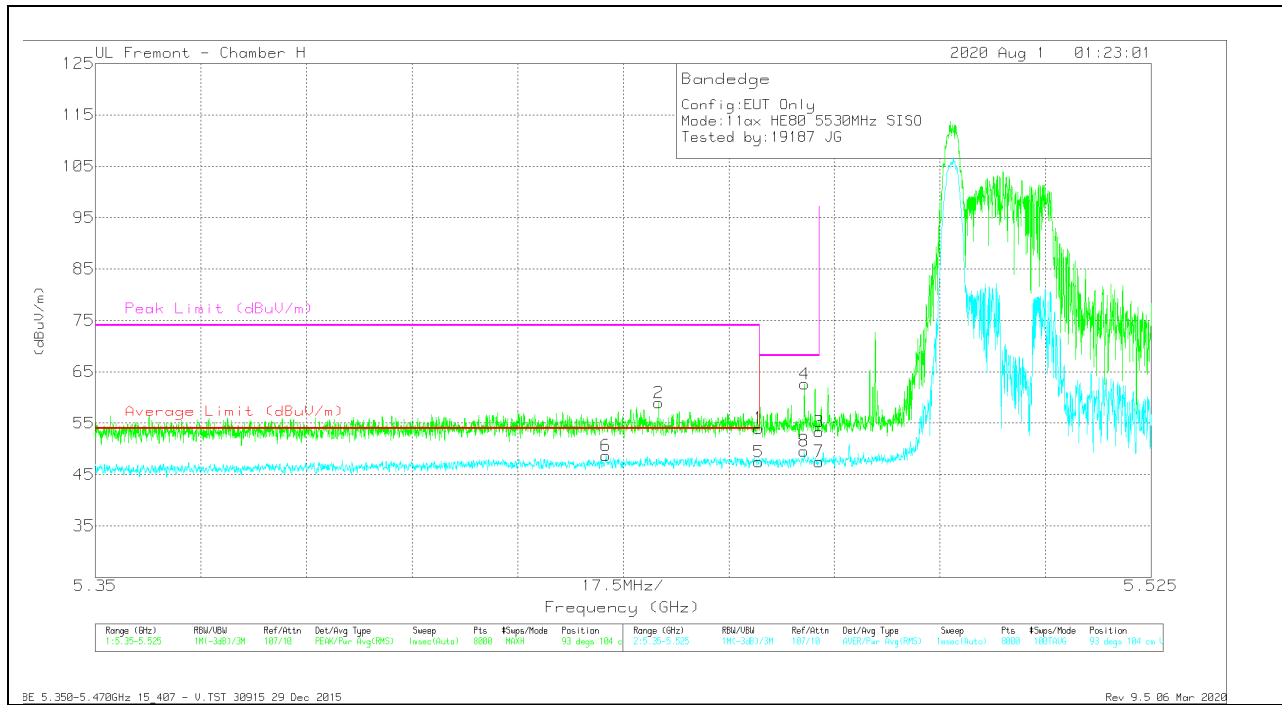


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.68	Pk	35.2	-20.9	53.98	-	-	74	-20.02	93	104	V
2	* 5.44338	44.66	Pk	35.1	-20.8	58.96	-	-	74	-15.04	93	104	V
5	* 5.45998	33.16	RMS	35.2	-20.9	47.46	54	-6.54	-	-	93	104	V
6	* 5.43465	34.38	RMS	35.1	-20.8	48.68	54	-5.32	-	-	93	104	V
8	5.46744	35.16	RMS	35.3	-20.9	49.56	-	-	-	-	93	104	V
4	5.46753	48.23	Pk	35.3	-20.9	62.63	-	-	68.2	-5.57	93	104	V
3	5.46998	39.03	Pk	35.3	-21	53.33	-	-	68.2	-14.87	93	104	V
7	5.46998	33.19	RMS	35.3	-21	47.49	-	-	-	-	93	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 5 + Antenna 6 OFDMA MODE – 996 Tones, RU Index 67

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

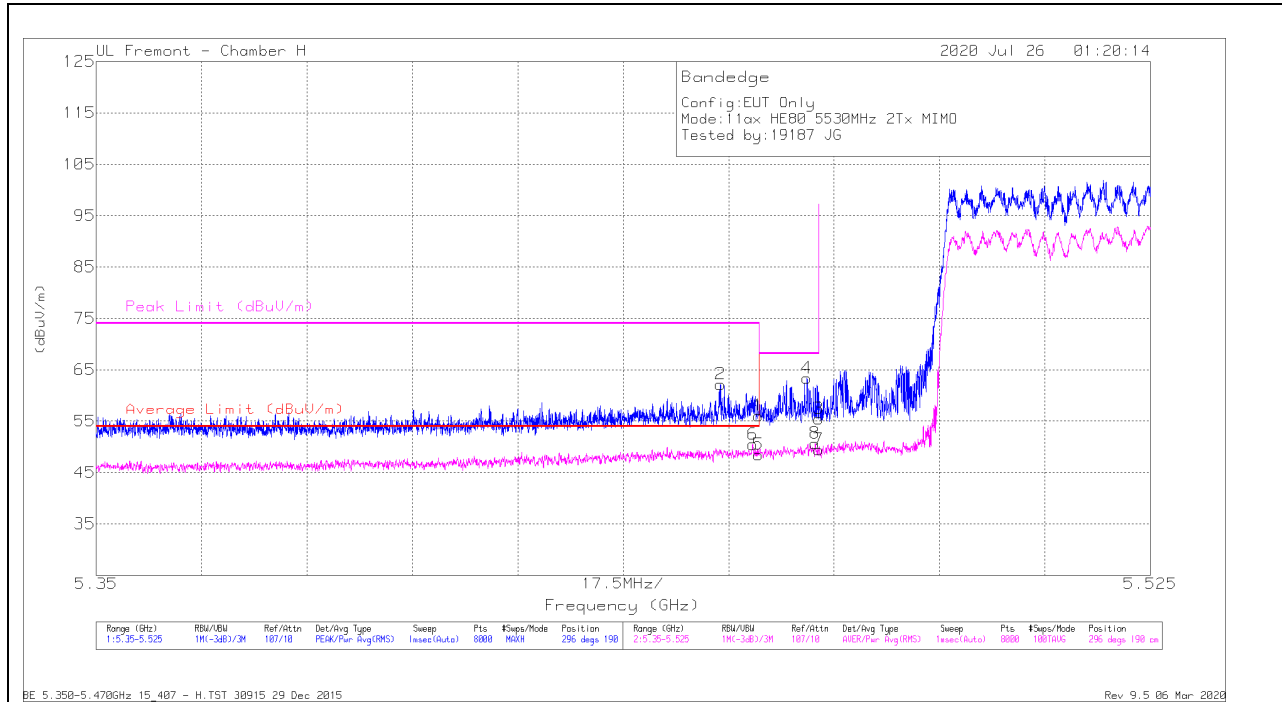

Marker	Frequency (GHz)	Meter Reading (dBu)	Det	AF TR63 (dBm)	Amp/CN/Ftr/Pad (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.78	Pk	35.2	-20.9	56.08	-	-	74	-17.92	296	190	H
2	* 5.45364	47.9	Pk	35.2	-20.9	62.2	-	-	74	-11.8	296	190	H
5	* 5.45998	33.73	RMS	35.2	-20.9	48.03	54	-5.97	-	-	296	190	H
6	* 5.45897	35.62	RMS	35.3	-20.9	50.02	54	-3.98	-	-	296	190	H
4	5.46801	48.99	Pk	35.3	-20.9	63.39	-	-	68.2	-4.81	296	190	H
8	5.46937	35.93	RMS	35.3	-21	50.23	-	-	-	-	296	190	H
3	5.46996	41.17	Pk	35.3	-21	55.47	-	-	68.2	-12.73	296	190	H
7	5.46998	34.67	RMS	35.3	-21	48.97	-	-	-	-	296	190	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

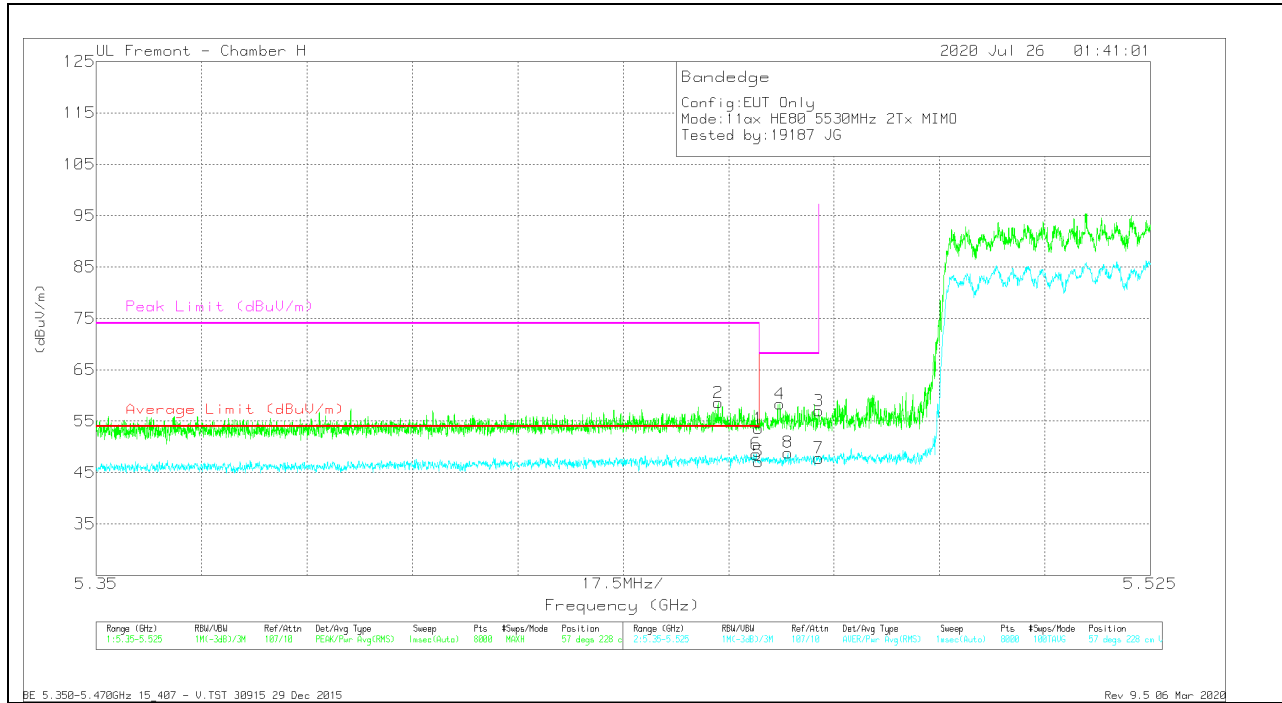


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.26	Pk	35.2	-20.9	53.56	-	-	74	-20.44	57	228	V
2	* 5.45324	44.29	Pk	35.2	-20.9	58.59	-	-	74	-15.41	57	228	V
5	* 5.45998	32.31	RMS	35.2	-20.9	46.61	54	-7.39	-	-	57	228	V
6	* 5.45998	33.62	RMS	35.2	-20.9	46.12	54	-5.88	-	-	57	228	V
4	5.4635	44.05	Pk	35.2	-20.9	58.35	-	-	68.2	-9.85	57	228	V
8	5.46484	34.1	RMS	35.2	-20.9	48.4	-	-	-	-	57	228	V
3	5.46998	42.69	Pk	35.3	-21	56.99	-	-	68.2	-11.21	57	228	V
7	5.46998	33.03	RMS	35.3	-21	47.33	-	-	-	-	57	228	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

996 Tones, RU Index 67 RESULTS

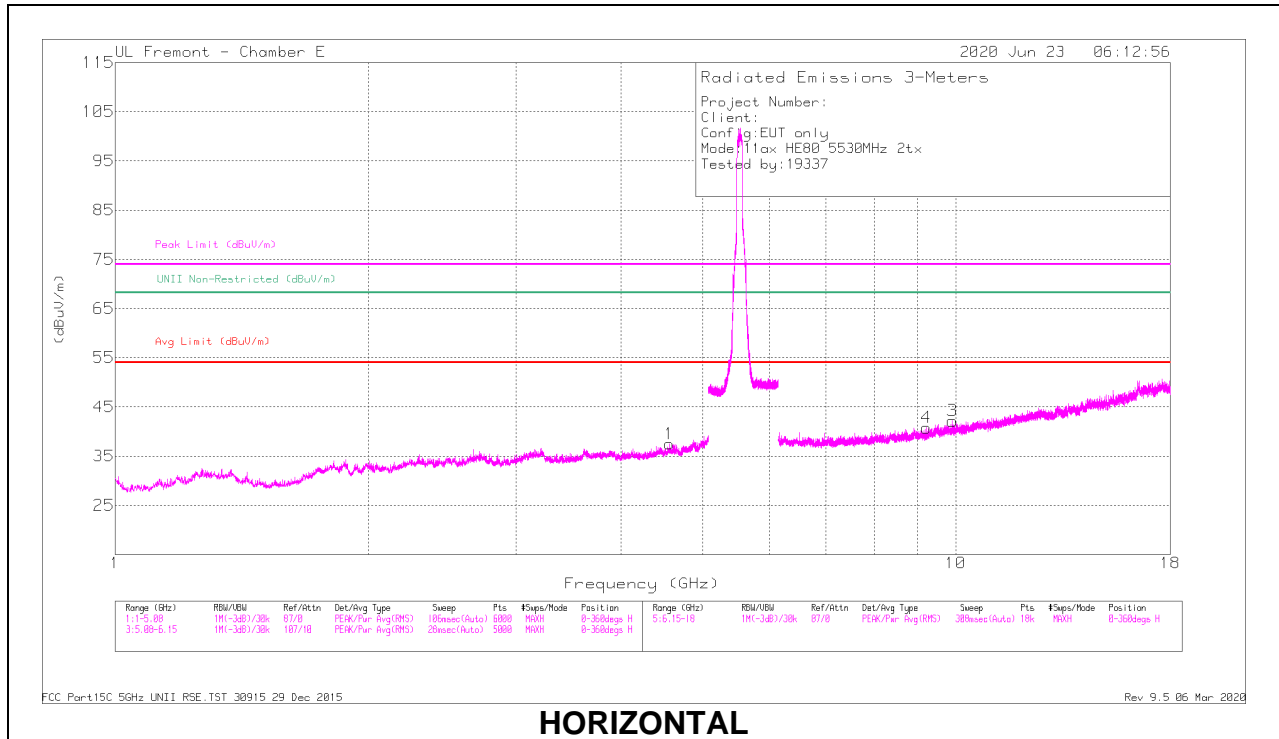

HORIZONTAL

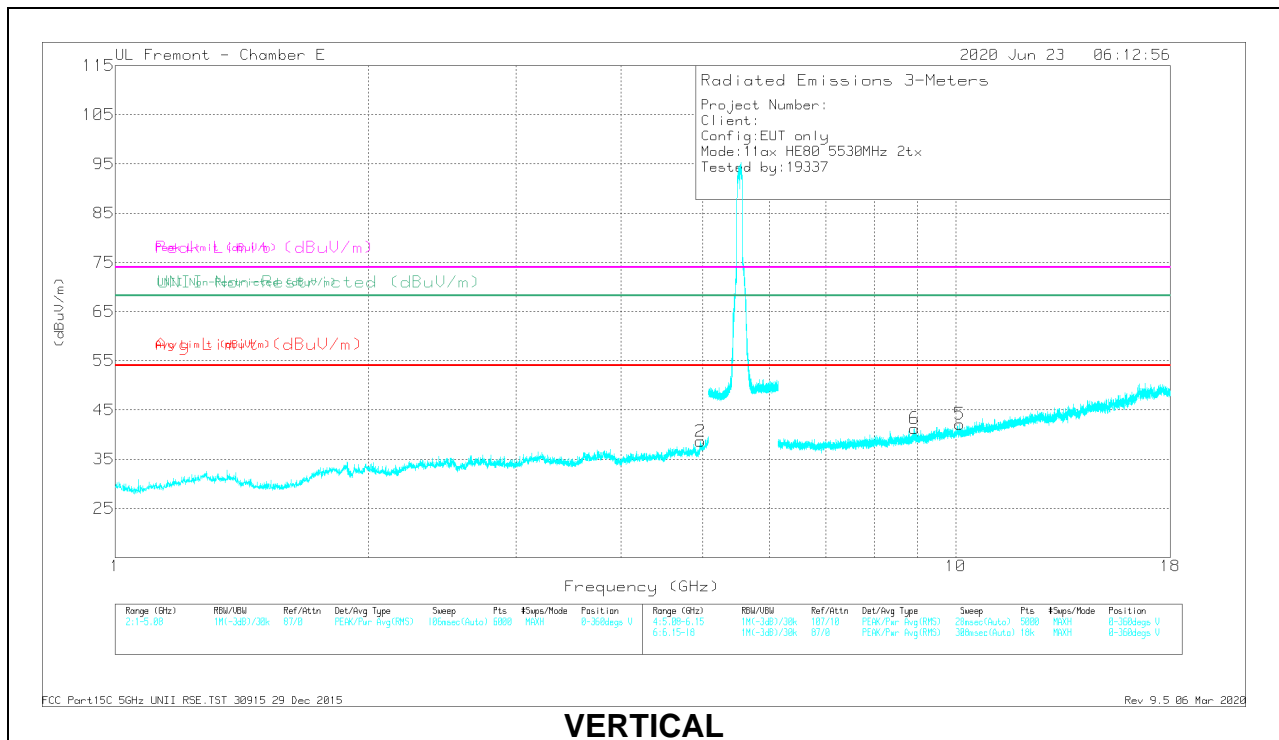

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Chf/Ftr/Psd (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.56711	42.11	PK-U	34.2	-31.9	44.41	-	-	74	-29.59	-	-	290	142	H
	* 4.56514	30.22	ADR	34.2	-31.9	32.52	54	-21.48	-	-	-	-	290	142	H
2	* 4.96966	41.7	PK-U	34.2	-30.1	45.8	-	-	74	-28.2	-	-	19	157	V
	* 4.97026	29.98	ADR	34.2	-30	34.18	54	-19.82	-	-	-	-	18	157	V
6	8.93325	36.99	PK-U	36.1	-25.7	47.39	-	-	-	-	68.2	-20.81	130	163	V
	8.93457	25.1	ADR	36.1	-25.7	35.5	-	-	-	-	-	-	130	163	V
4	9.22098	36.14	PK-U	36.2	-26.1	46.24	-	-	-	-	68.2	-21.96	305	174	H
	9.223	25.07	ADR	36.2	-26.1	35.17	-	-	-	-	-	-	305	174	H
3	9.90903	38.5	PK-U	36.9	-26.4	49	-	-	-	-	68.2	-19.2	351	219	H
	9.91127	25.84	ADR	37	-26.4	36.44	-	-	-	-	-	-	351	219	H
5	10.10683	25.6	ADR	36.9	-26	36.5	-	-	-	-	-	-	73	202	V
	10.10762	37.84	PK-U	36.9	-26	48.74	-	-	-	-	68.2	-19.46	73	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

2TX Antenna 5 + Antenna 6 OFDMA MODE –MCS 11, 26 Tones, RU Index 36

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

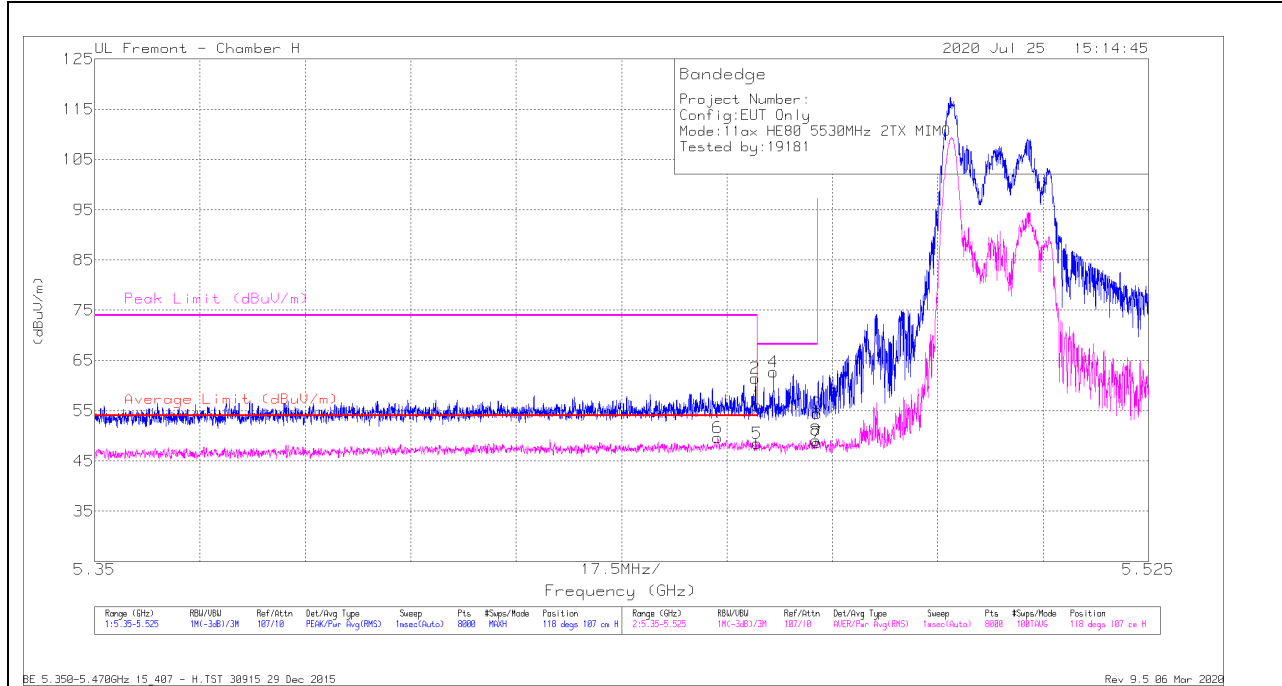

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1863 (dBm)	Amp/Cal/Freq/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.85	Pk	35.2	-20.9	36.15	-	-	74	-17.85	118	107	H
2	* 5.45972	47.21	Pk	35.2	-20.9	61.51	-	-	74	-12.49	118	107	H
5	* 5.45998	33.78	RMS	35.2	-20.9	48.08	54	-5.92	-	-	118	107	H
6	* 5.45348	34.81	RMS	35.2	-20.9	49.11	54	-4.89	-	-	118	107	H
4	5.46272	48.42	Pk	35.2	-20.9	62.72	-	-	68.2	-5.48	118	107	H
8	5.46974	34.38	RMS	35.3	-21	48.68	-	-	-	-	118	107	H
3	5.46998	40.22	Pk	35.3	-21	54.52	-	-	68.2	-13.68	118	107	H
7	5.46998	33.83	RMS	35.3	-21	48.13	-	-	-	-	118	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

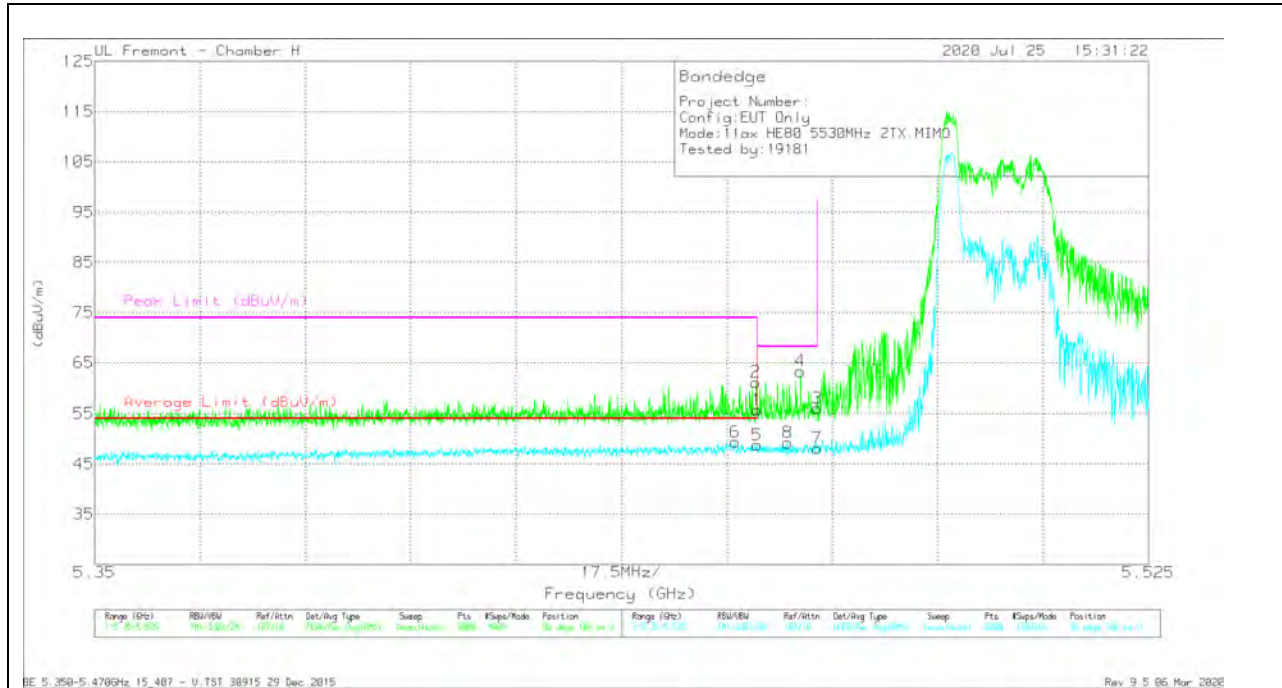


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1963 (dB/m)	Amp/CM/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.48	Pk	35.2	-20.9	55.78	-	-	74	-18.22	96	106	V
2	* 5.45983	46.87	Pk	35.2	-20.9	61.17	-	-	74	-12.83	96	106	V
5	* 5.45998	33.95	RMS	35.2	-20.9	48.25	54	-5.75	-	-	96	106	V
6	* 5.45635	34.52	RMS	35.3	-20.9	48.92	54	-5.08	-	-	96	106	V
8	5.46506	34.43	RMS	35.2	-20.9	48.73	-	-	-	-	96	106	V
4	5.4672	49	Pk	35.3	-20.9	63.4	-	-	68.2	-4.8	96	106	V
3	5.46998	41.78	Pk	35.3	-21	56.08	-	-	68.2	-12.12	96	106	V
7	5.46998	33.31	RMS	35.3	-21	47.61	-	-	-	-	96	106	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

26 Tones, RU Index 36 RESULTS

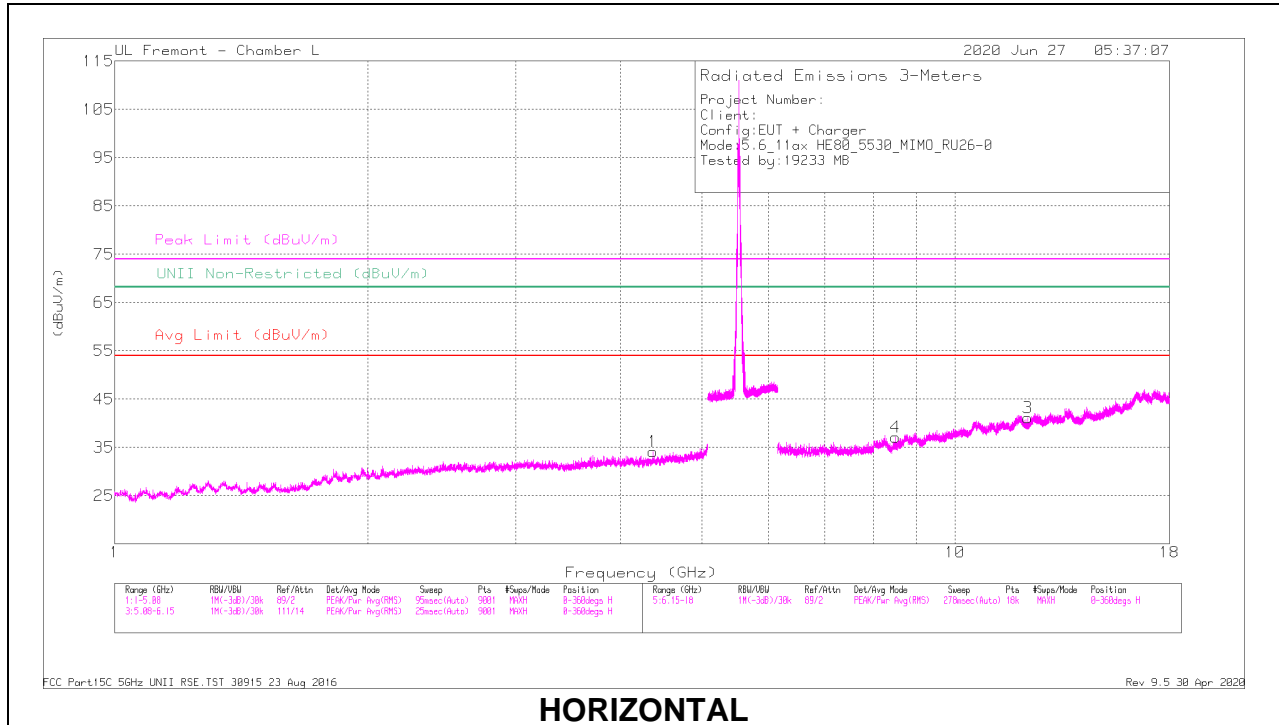

HORIZONTAL

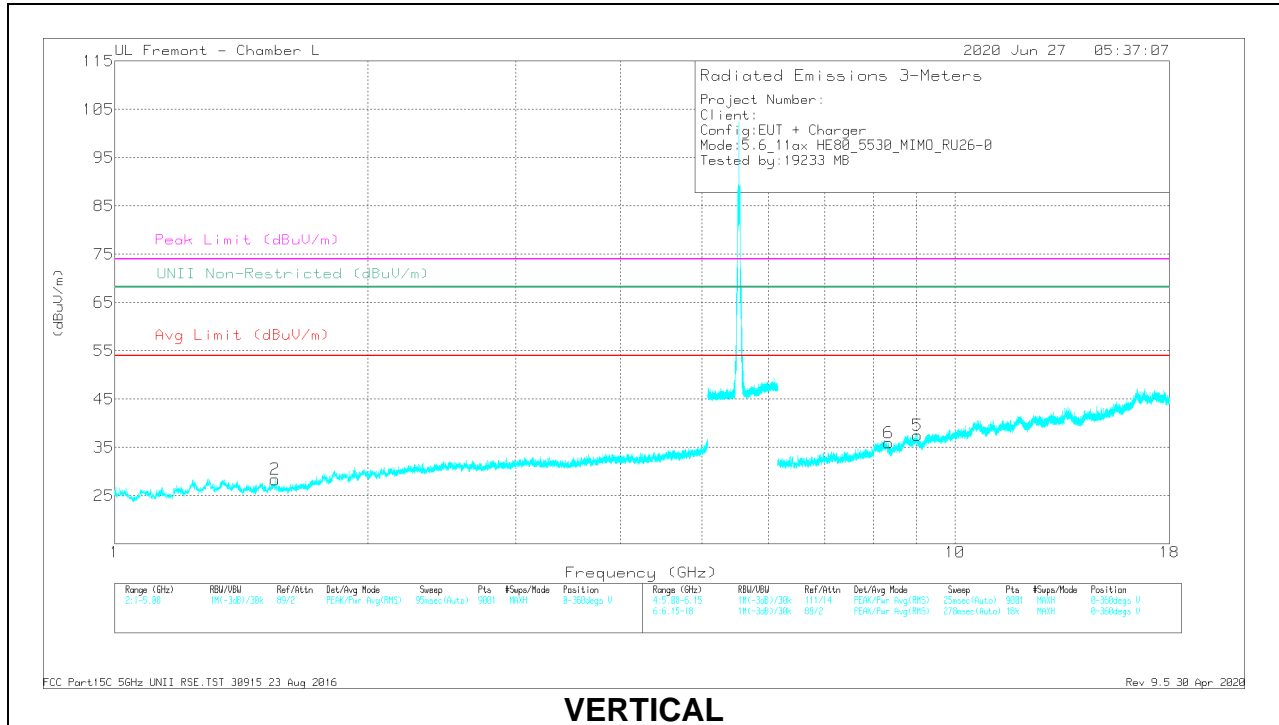

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbf/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.37383	35.91	PK-U	33.6	-27	42.51	-	-	74	-31.49	-	-	10	226	H
	* 4.3757	26.04	ADR	33.6	-27	32.64	54	-21.36	-	-	-	-	10	226	H
2	* 1.55086	40.27	PK-U	28.1	-32.2	36.17	-	-	74	-37.63	-	-	176	351	V
	* 1.55084	29.78	ADR	28.1	-32.2	25.68	54	-28.32	-	-	-	-	176	351	V
3	* 12.20824	29.83	PK-U	38.9	-19.9	48.83	-	-	74	-25.17	-	-	43	355	H
	* 12.20856	19.19	ADR	38.9	-19.9	38.19	54	-15.81	-	-	-	-	43	355	H
4	* 8.49505	30.43	PK-U	35.8	-21.2	45.03	-	-	74	-28.97	-	-	11	359	H
	* 8.49675	20.26	ADR	35.8	-21.2	34.86	54	-19.14	-	-	-	-	11	359	H
5	* 9.02292	30.65	PK-U	36.1	-20.7	46.05	-	-	74	-27.95	-	-	116	359	V
	* 9.02612	20.24	ADR	36.1	-20.7	35.64	54	-18.36	-	-	-	-	116	359	V
6	* 8.33339	31.65	PK-U	35.7	-22.2	45.15	-	-	74	-28.85	-	-	278	353	V
	* 8.33309	21.36	ADR	35.7	-22.2	34.86	54	-19.14	-	-	-	-	278	353	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.1.19. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX Antenna 5 MODE, MCS 9

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

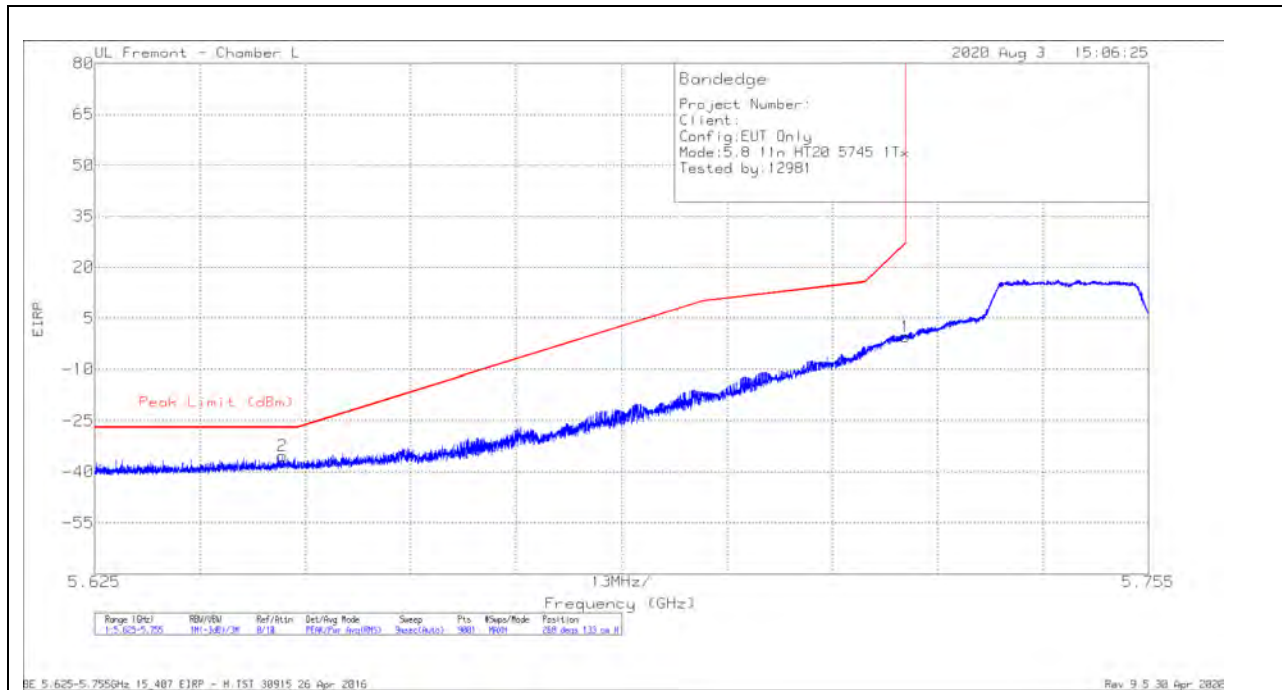

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 344 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-30.4	Pk	34.7	-16.6	11.8	-5	26.99	-27.49	268	133	H
2	5.6482	-65.19	Pk	34.7	-16.6	11.8	-35.29	-27	-8.29	268	133	H

Pk - Peak detector

VERTICAL RESULT

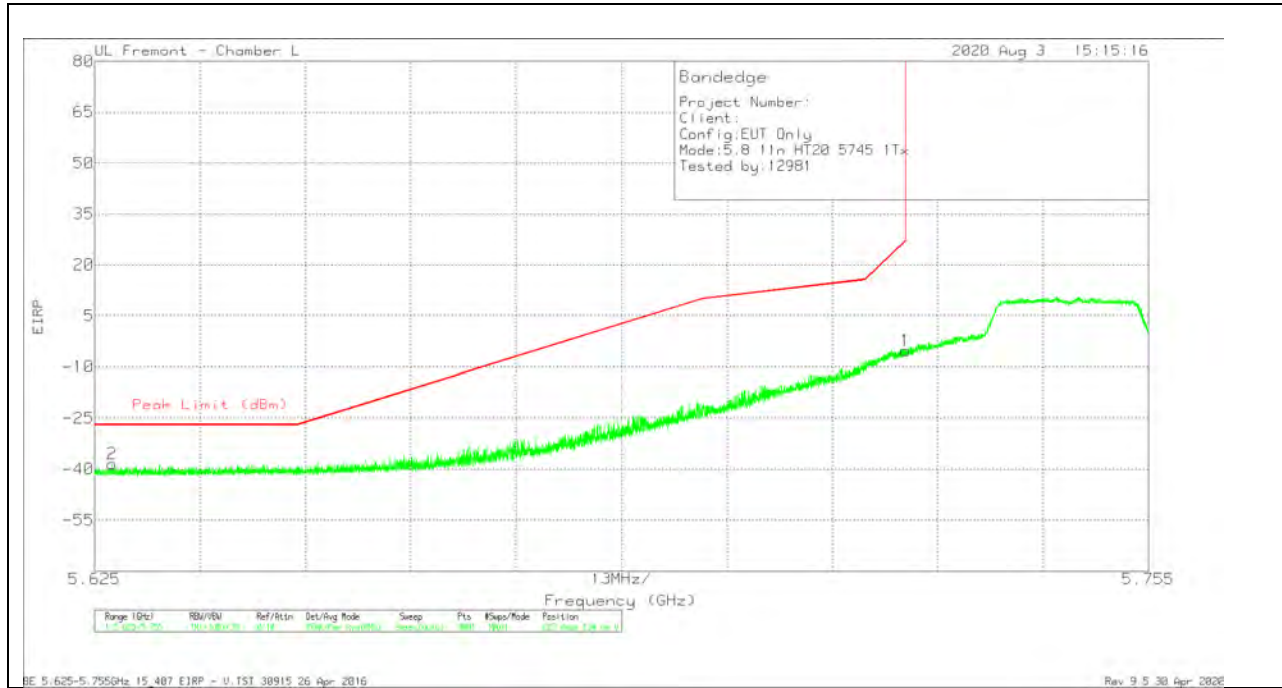


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 344 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-35.06	Pk	34.7	-16.6	11.8	-5.16	26.99	-32.15	223	134	V
2	5.62718	-68.44	Pk	34.8	-16.6	11.8	-38.44	-27	-11.44	223	134	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

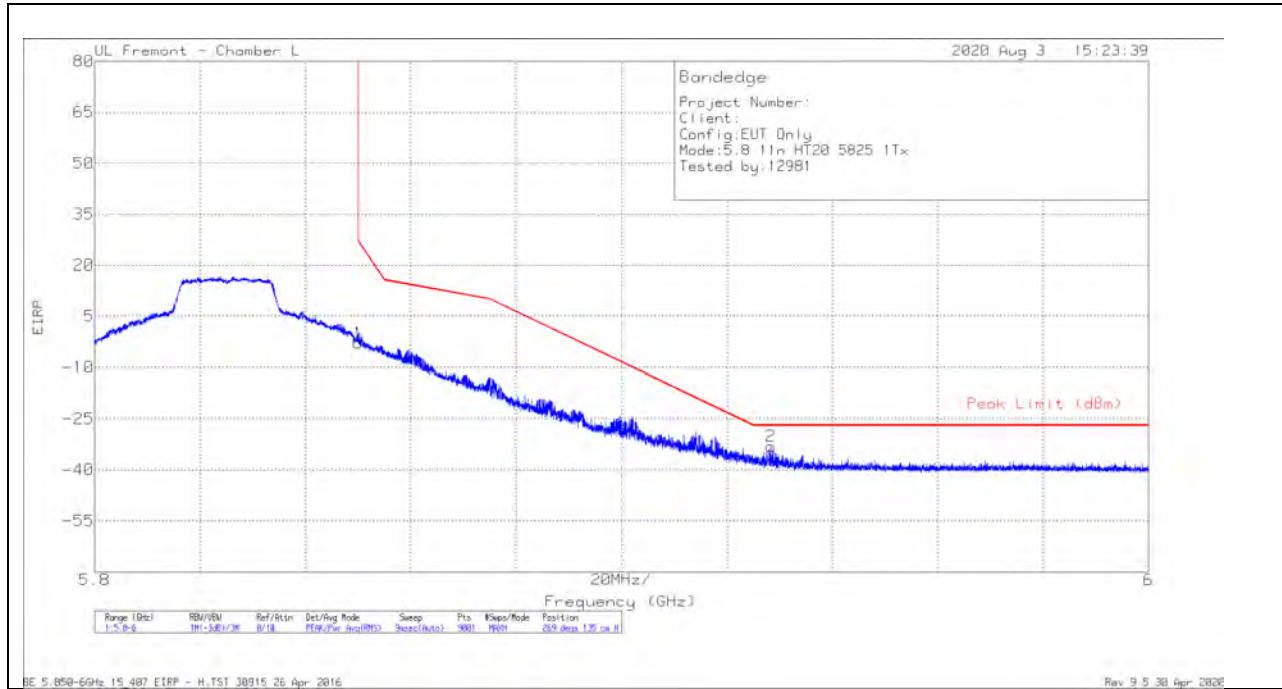

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 344 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-32.95	Pk	35	-16.7	11.8	-2.85	26.95	-29.8	269	135	H
2	5.92829	-63.71	Pk	35.2	-16.3	11.8	-33.01	-27	-6.01	269	135	H

Pk - Peak detector

VERTICAL RESULT

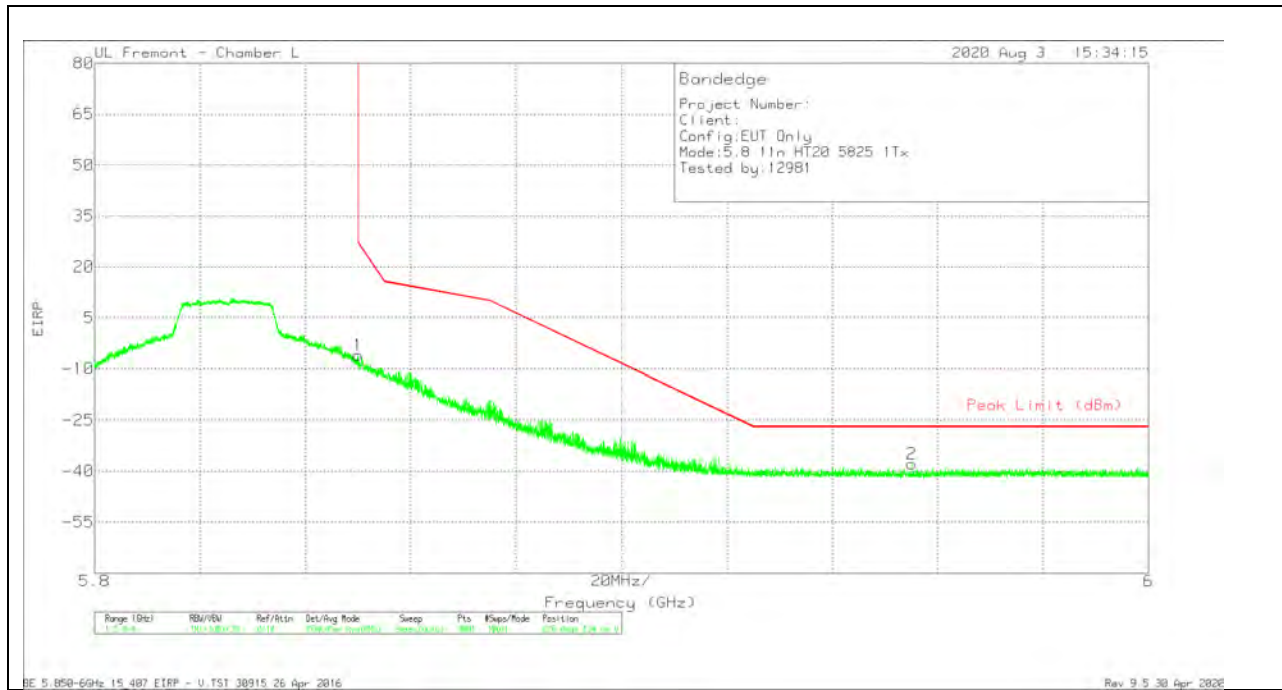


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 344 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-36.03	Pk	35	-16.7	11.8	-5.93	26.95	-32.88	226	134	V
2	5.95507	-68.7	Pk	35.2	-16.2	11.8	-37.9	-27	-10.9	226	134	V

Pk - Peak detector

1TX Antenna 6 MODE, MCS 7

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

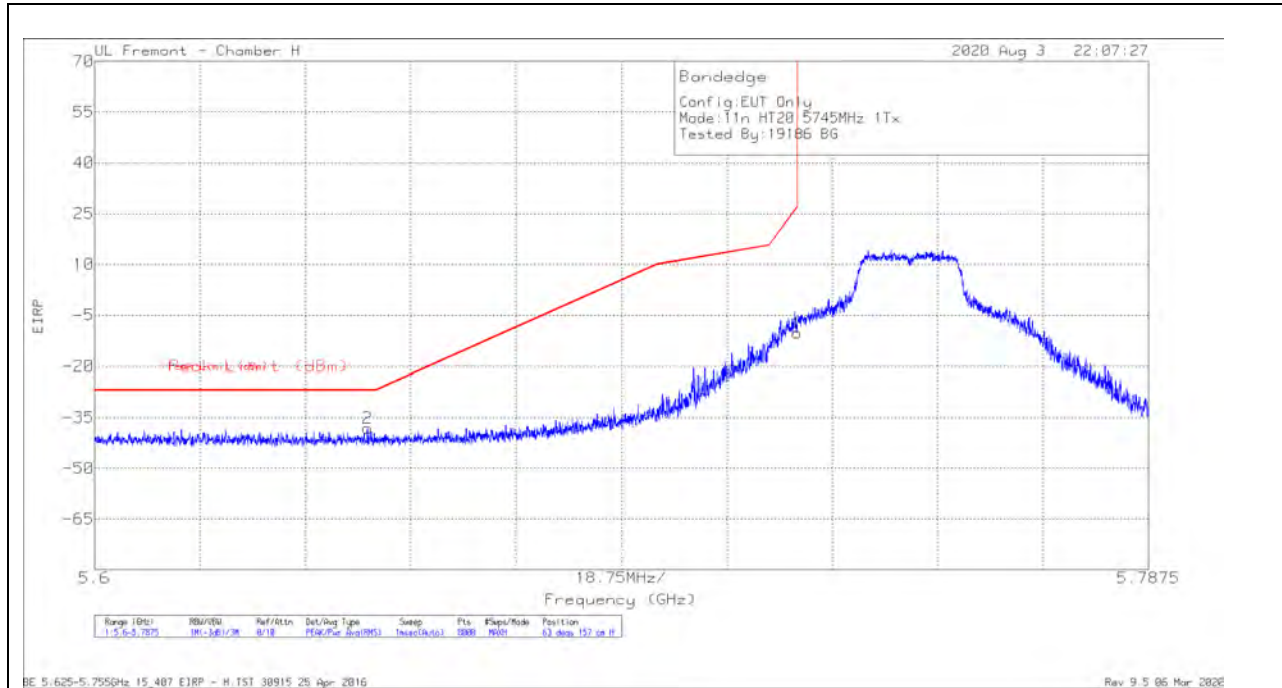

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64852	-64.07	Pk	35.1	-21	11.8	0	-38.17	-27	-11.17	63	157	H
1	5.72498	-35.84	Pk	35	-21.1	11.8	0	-10.14	26.96	-37.1	63	157	H

Pk - Peak detector

VERTICAL RESULT

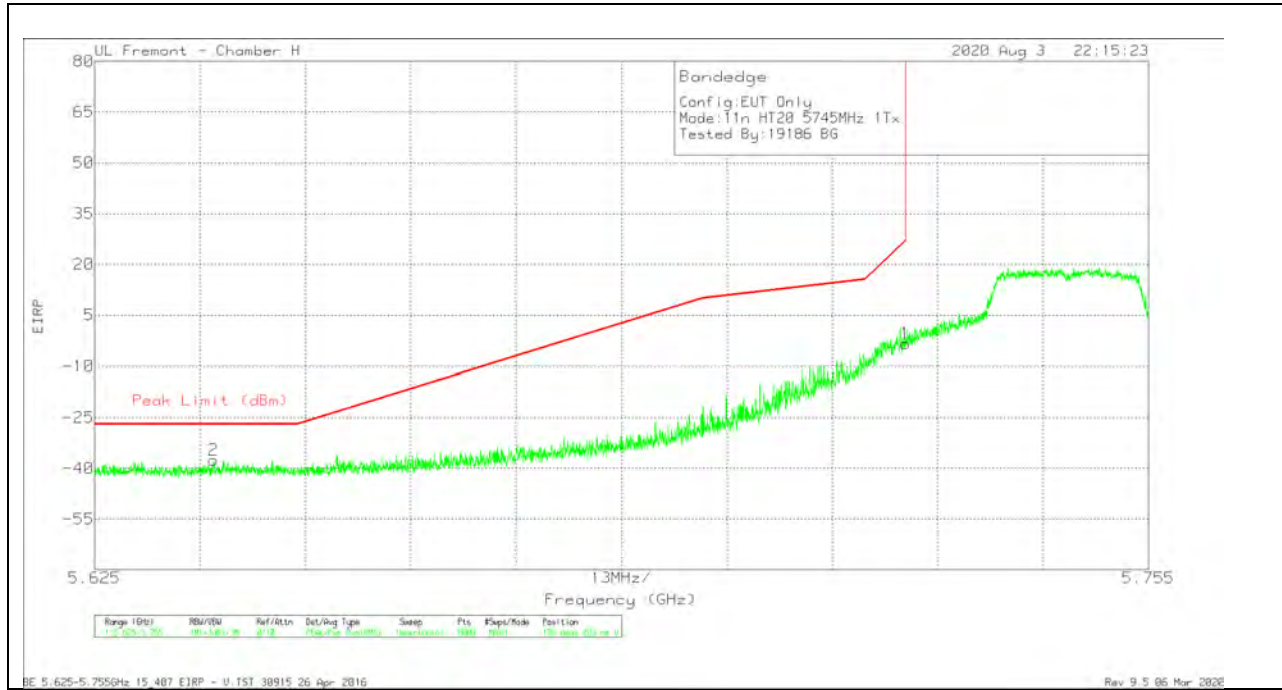


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63969	-63.61	Pk	35.2	-21	11.8	0	-37.61	-27	-10.61	196	283	V
1	5.725	-28.96	Pk	35	-21.1	11.8	0	-3.26	27	-30.26	196	283	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

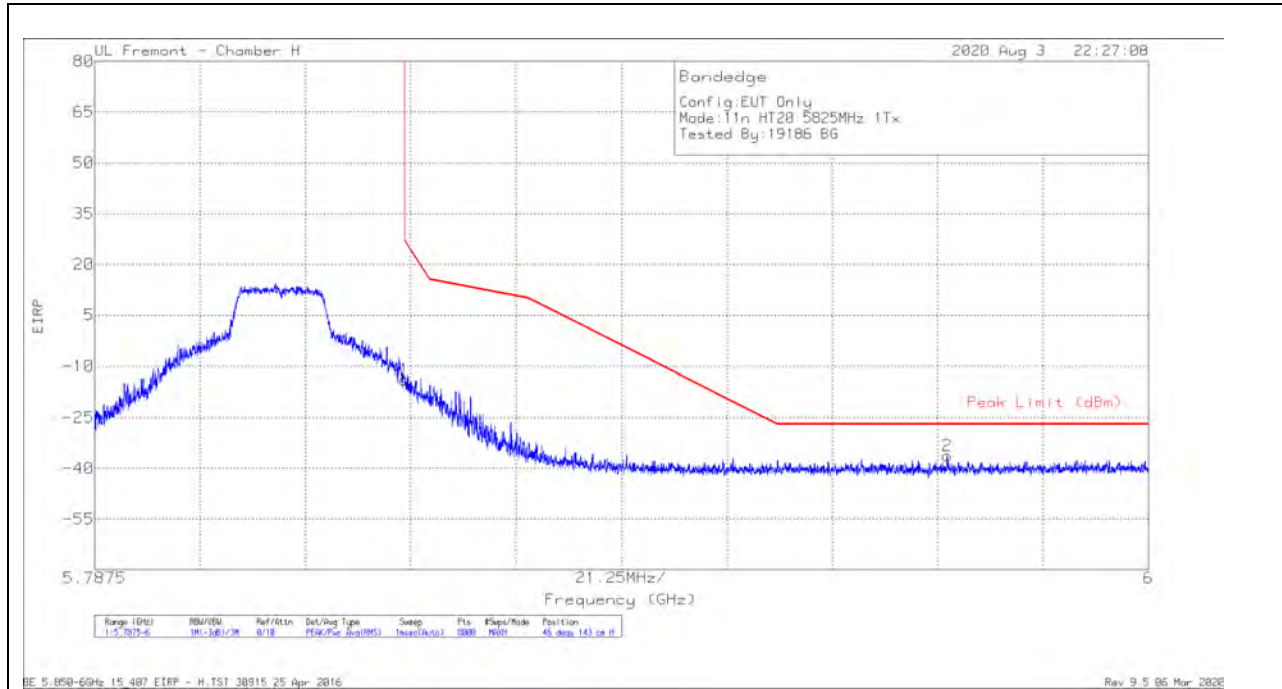

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Parad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-39.94	PK	35	-20.7	11.8	0	-13.84	26.98	-40.82	46	143	H
2	5.95944	-62.96	PK	35.1	-20.2	11.8	0	-36.26	-27	-9.26	46	143	H

Pk - Peak detector