

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.66543	35.39	PK-U	33	-28	40.39	-	-	74	-33.61	-	-	107	136	H
	* 3.66669	25.82	ADR	33	-28	30.82	54	-23.18	-	-	-	-	107	136	H
4	* 3.91986	35.72	PK-U	33.5	-27.5	41.72	-	-	74	-32.28	-	-	195	174	V
	* 3.91791	25.52	ADR	33.5	-27.4	31.62	54	-22.38	-	-	-	-	195	174	V
2	8.73787	30.19	PK-U	36	-20.7	45.49	-	-	-	-	68.2	-22.71	286	146	H
3	10.50339	34.59	PK-U	37.7	-19.3	52.99	-	-	-	-	68.2	-15.21	239	192	H
5	* 9.3974	31.74	PK-U	36.5	-21.1	47.14	-	-	74	-26.86	-	-	192	171	V
	* 9.39862	21.1	ADR	36.6	-21.1	36.6	54	-17.4	-	-	-	-	192	171	V
6	* 11.96345	31.07	PK-U	38.6	-19.5	50.17	-	-	74	-23.83	-	-	40	250	V
	* 11.962	20.35	ADR	38.6	-19.4	39.55	54	-14.45	-	-	-	-	40	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

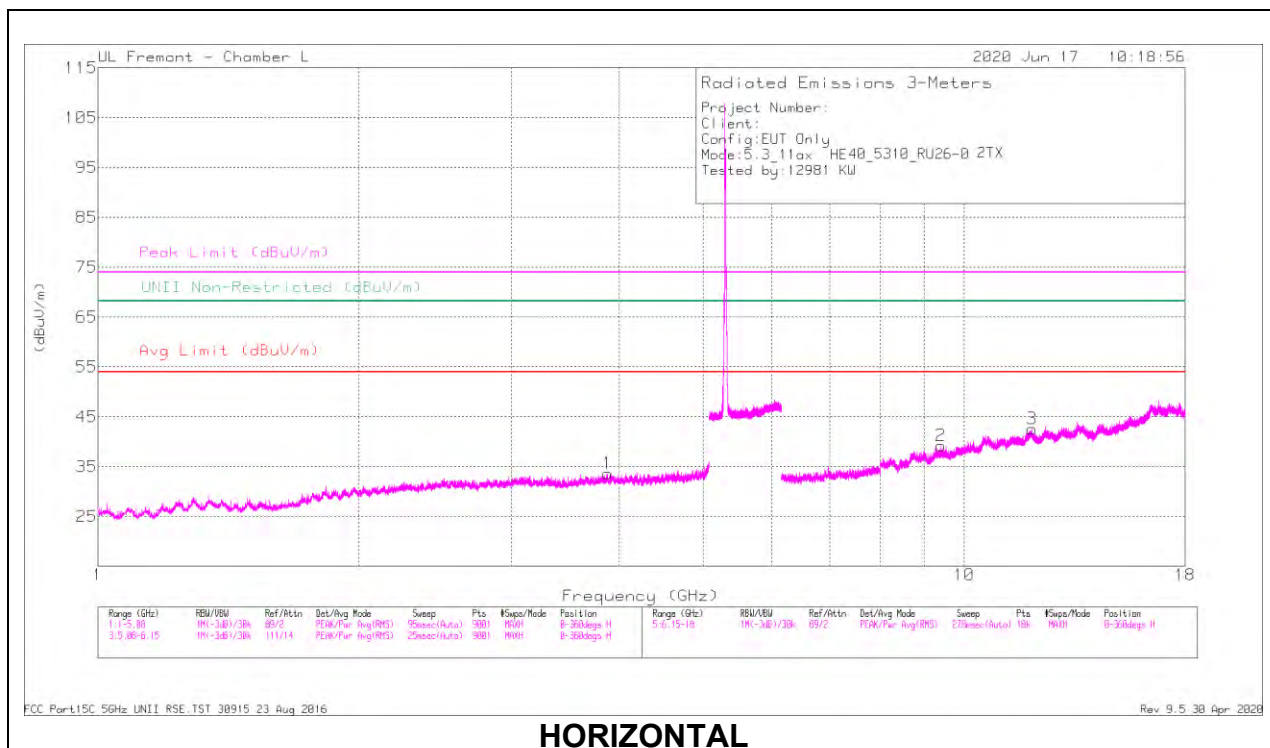

HORIZONTAL

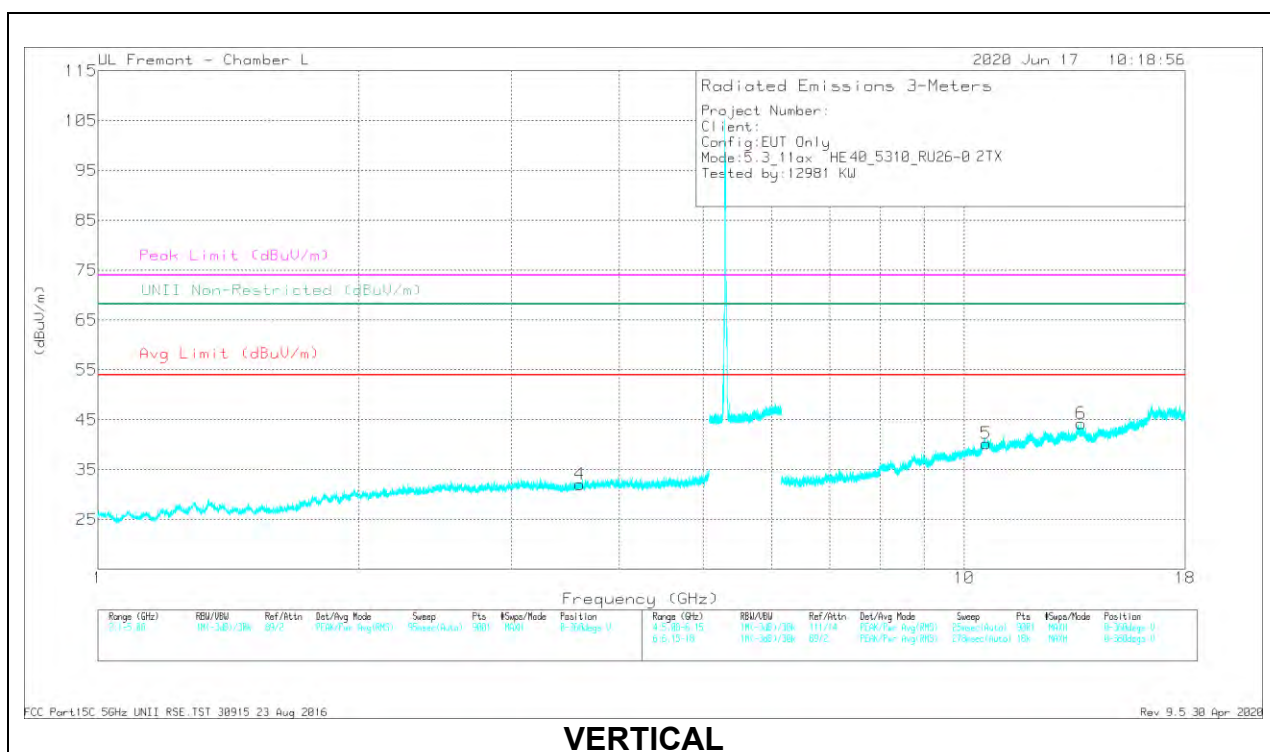

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dBm)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.87725	35.53	PK-U	33.6	-28.1	41.03	-	-	74	-32.97	-	-	242	158	H
	* 3.87691	25.67	ADR	33.6	-28.1	31.17	54	-22.83	-	-	-	-	242	158	H
4	* 3.59904	37.05	PK-U	33.1	-28.7	41.45	-	-	74	-32.55	-	-	318	121	V
	* 3.59977	28.25	ADR	33	-28.7	30.55	54	-23.45	-	-	-	-	318	121	V
2	* 9.40395	30.14	PK-U	36.6	-21	45.74	-	-	74	-28.26	-	-	205	176	H
	* 9.40448	20.61	ADR	36.6	-21	36.21	54	-17.79	-	-	-	-	205	176	H
3	* 11.9786	31.51	PK-U	38.7	-19.6	50.61	-	-	74	-23.39	-	-	114	217	H
	* 11.97951	20.16	ADR	38.7	-19.6	39.26	54	-14.74	-	-	-	-	114	217	H
5	10.59744	31.48	PK-U	37.8	-20.1	49.18	-	-	-	-	68.2	-19.02	193	283	V
6	13.65265	30.86	PK-U	38.7	-19	50.56	-	-	-	-	68.2	-17.64	113	252	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

6.1.12. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.3 GHz BAND

1TX ANTENNA 6 – 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

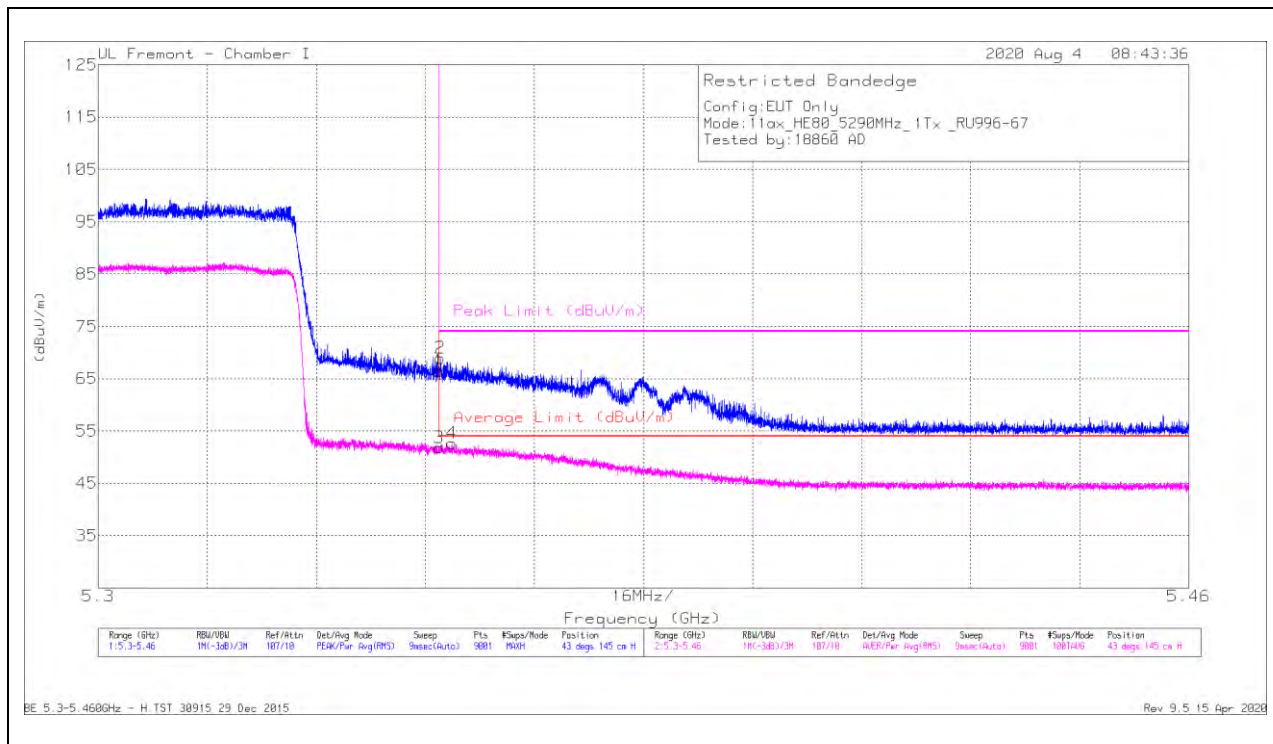

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	45.79	Pk	34.6	-14	66.39	-	-	74	-7.61	43	145	H
2	* 5.35019	48.37	Pk	34.6	-14	68.97	-	-	74	-5.03	43	145	H
3	* 5.35001	31.19	RMS	34.6	-14	51.79	54	-2.21	-	-	43	145	H
4	* 5.35186	32	RMS	34.6	-14	52.6	54	-1.4	-	-	43	145	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

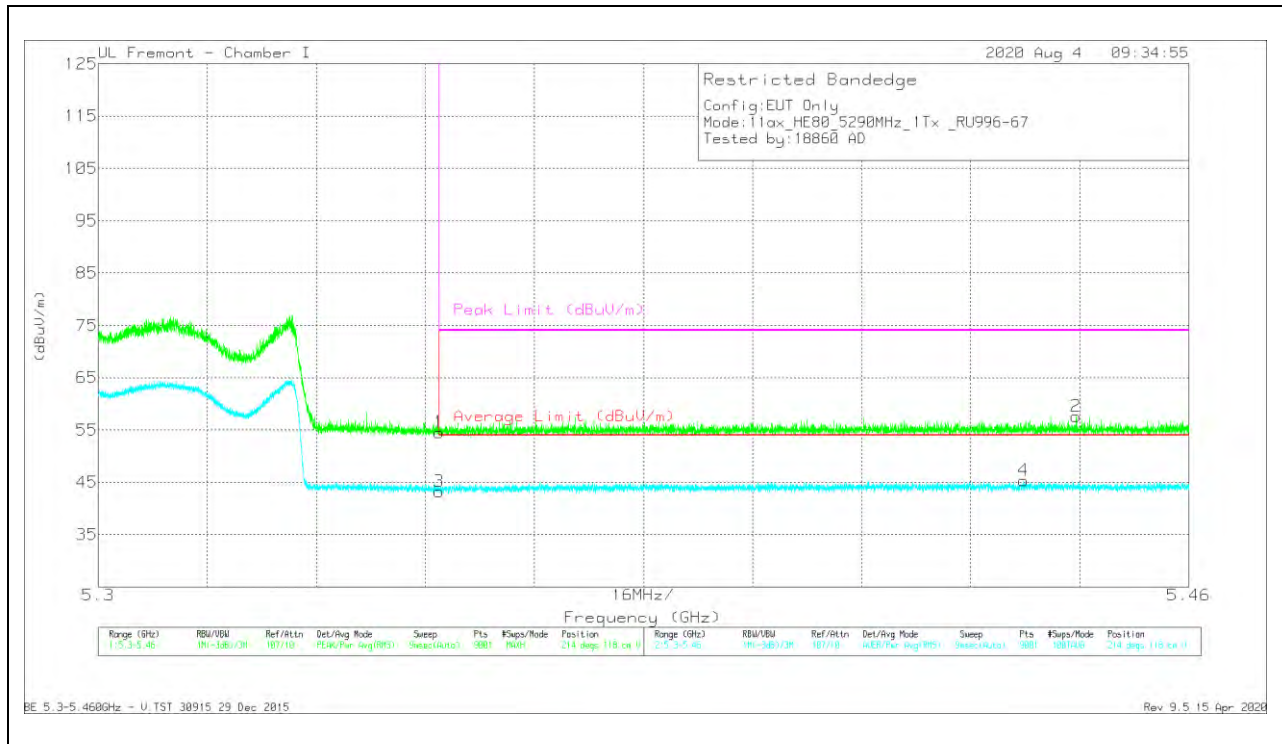


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	33.93	Pk	34.6	-14	54.53	-	-	74	-19.47	214	118	V
2	* 5.44349	36.37	Pk	34.9	-13.7	57.67	-	-	74	-16.43	214	118	V
3	* 5.35001	22.65	RMS	34.6	-14	43.25	54	-10.75	-	-	214	118	V
4	* 5.43575	24.28	RMS	34.9	-13.8	45.38	54	-8.62	-	-	214	118	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANTENNA 6 – 26 Tones, RU Index 36

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

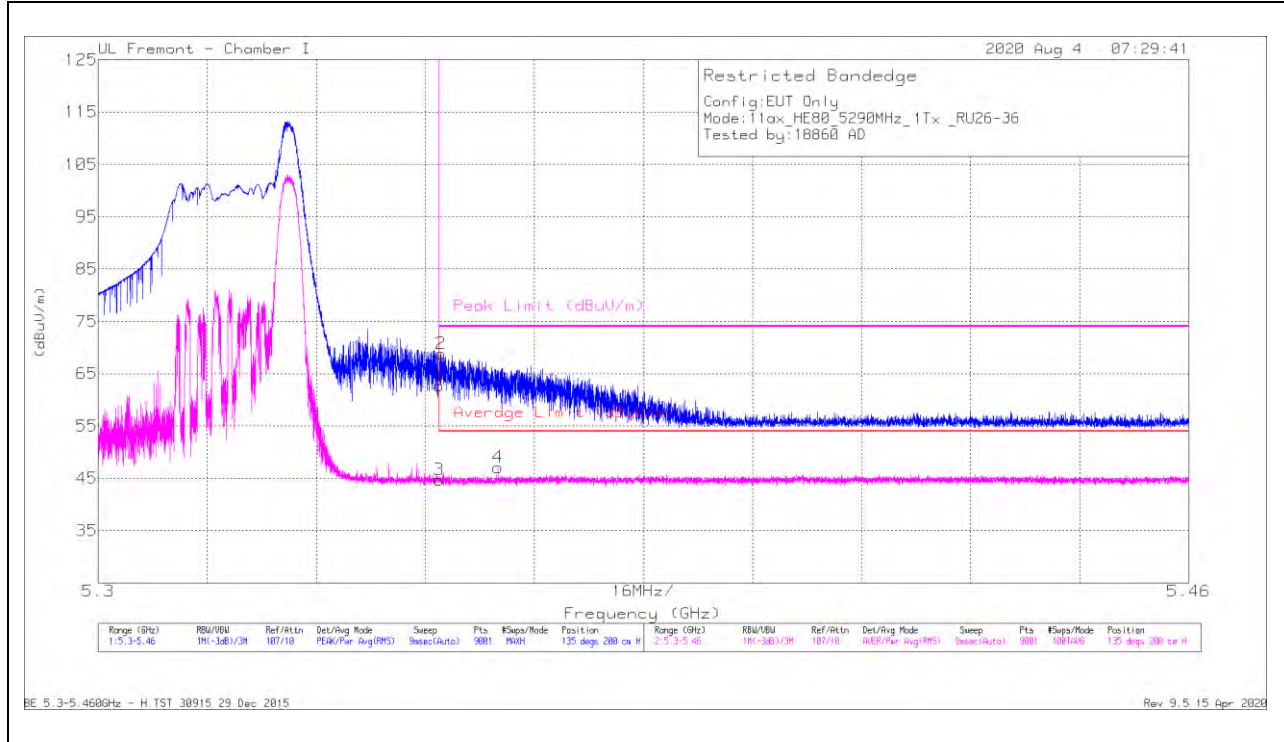

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	42.09	Pk	34.6	-14	62.69	-	-	74	-11.31	135	200	H
2	* 5.35031	48.23	Pk	34.6	-14	68.83	-	-	74	-5.17	135	200	H
3	* 5.35001	24.06	RMS	34.6	-14	44.66	54	-9.34	-	-	135	200	H
4	* 5.35867	26.35	RMS	34.6	-13.9	47.05	54	-6.95	-	-	135	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

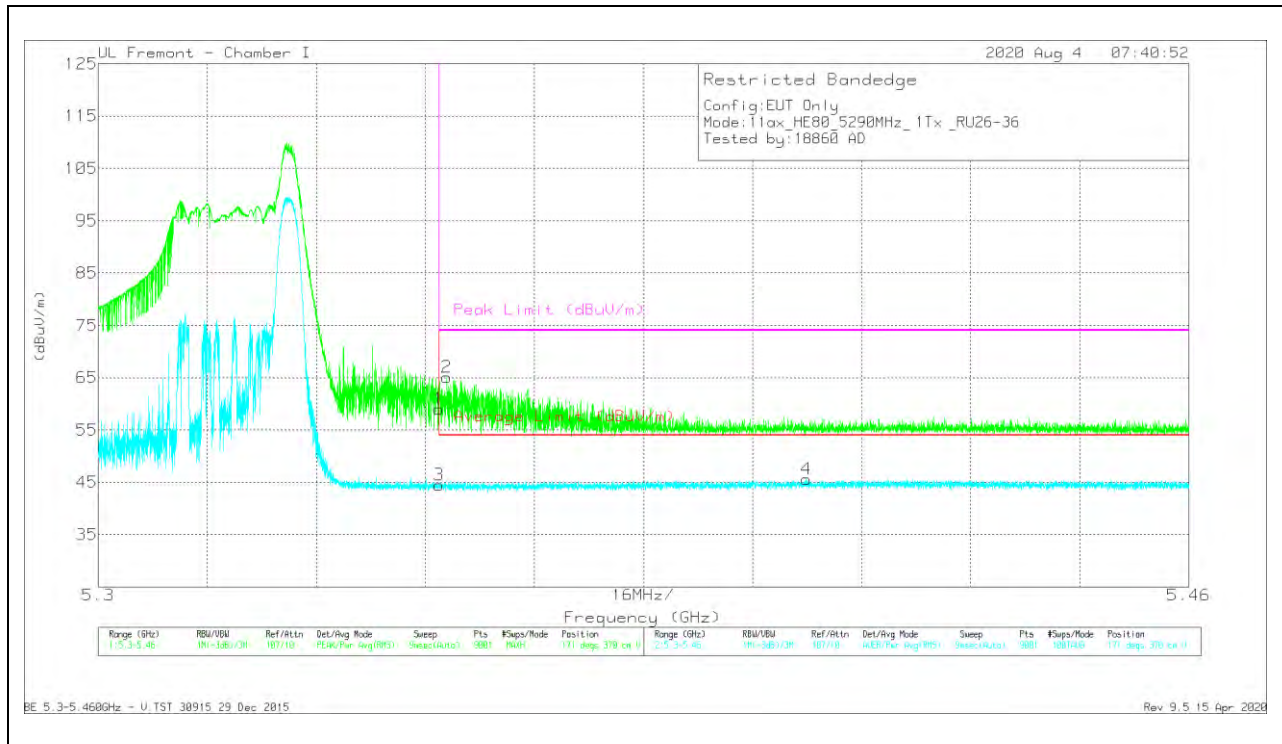


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbll/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	38.33	Pk	34.6	-14	58.93	-	-	74	-15.07	171	370	V
2	* 5.35113	44.5	Pk	34.6	-14	65.1	-	-	74	-8.9	171	370	V
3	* 5.35001	23.81	RMS	34.6	-14	44.41	54	-9.59	-	-	171	370	V
4	* 5.40395	24.71	RMS	34.7	-13.8	45.61	54	-8.39	-	-	171	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANTENNA 5 – 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

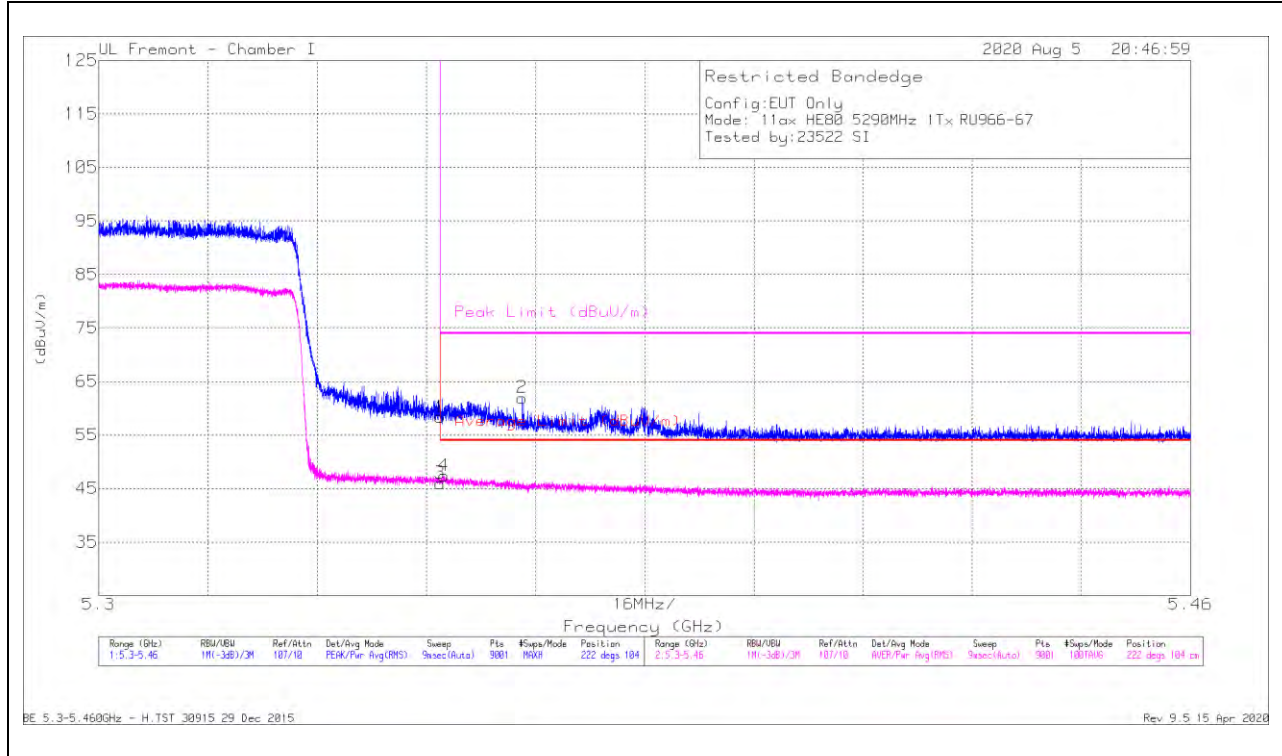

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	37.75	Pk	34.6	-14	58.35	-	-	74	-15.65	222	104	H
2	* 5.36201	41.24	Pk	34.6	-13.9	61.94	-	-	74	-12.06	222	104	H
3	* 5.35001	25.38	RMS	34.6	-14	45.98	54	-8.02	-	-	222	104	H
4	* 5.35058	26.79	RMS	34.6	-14	47.39	54	-6.61	-	-	222	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

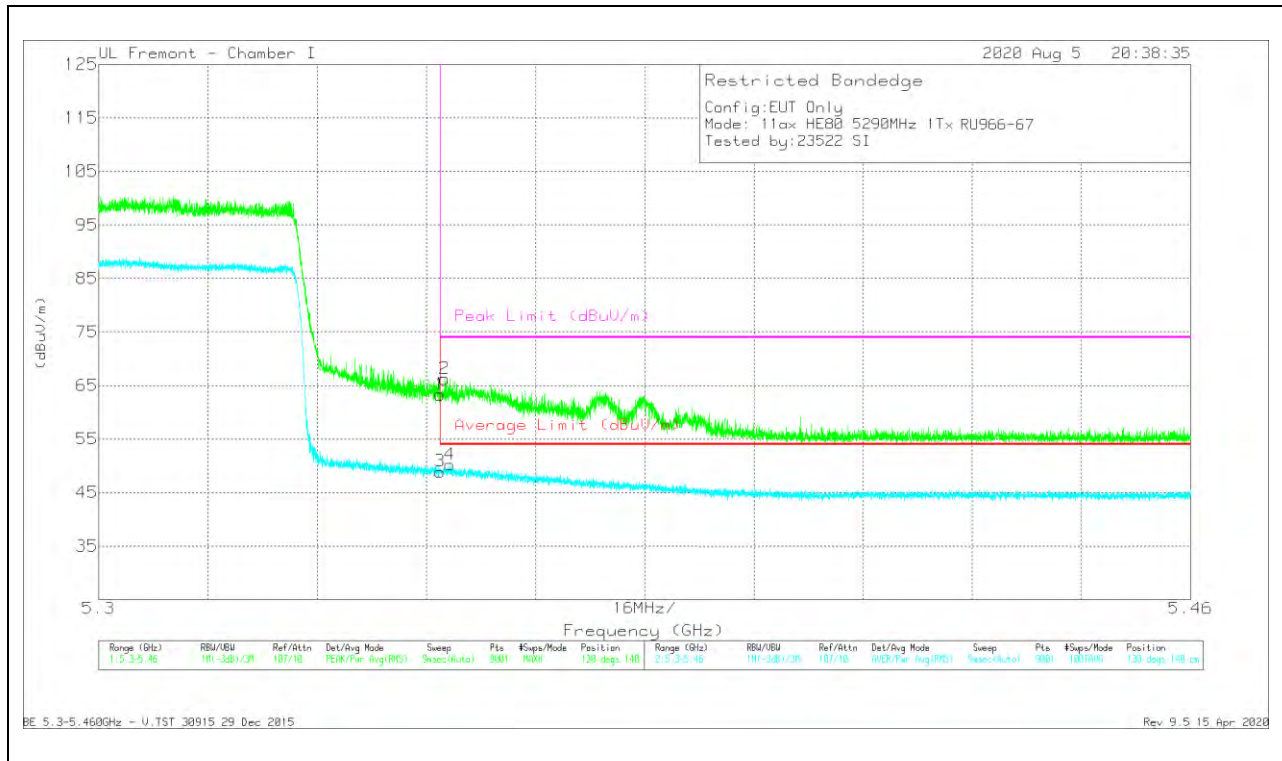


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbll/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	42.71	Pk	34.6	-14	63.31	-	-	74	-10.69	130	140	V
2	* 5.35007	45.62	Pk	34.6	-14	66.22	-	-	74	-7.78	130	140	V
3	* 5.35001	28.32	RMS	34.6	-14	48.92	54	-5.08	-	-	130	140	V
4	* 5.35147	29.58	RMS	34.6	-14	50.18	54	-3.82	-	-	130	140	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANTENNA 5 – 26 Tones, RU Index 36

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

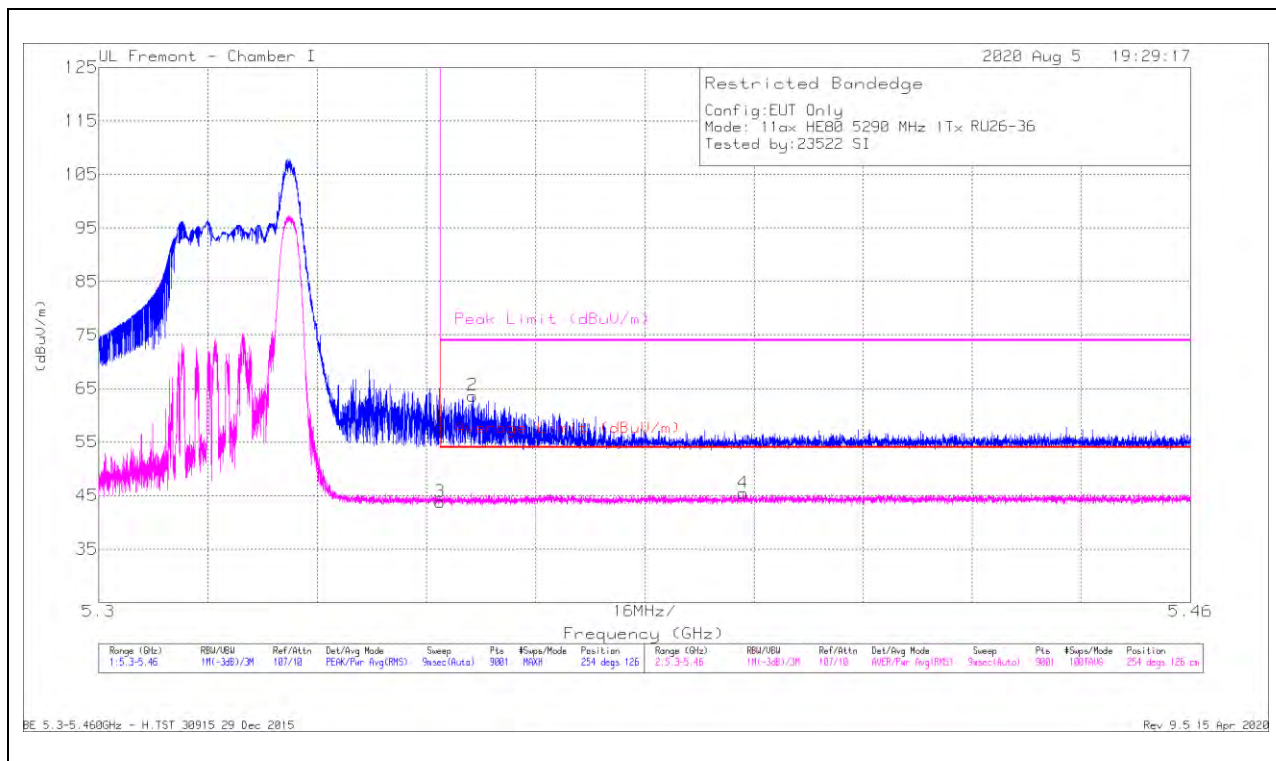

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Fitr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	37.27	Pk	34.6	-14	57.87	-	-	74	-16.13	254	126	H
2	* 5.35481	43.06	Pk	34.6	-14	63.66	-	-	74	-10.34	254	126	H
3	* 5.35001	23.23	RMS	34.6	-14	43.83	54	-10.17	-	-	254	126	H
4	* 5.39445	24.52	RMS	34.7	-13.8	45.42	54	-8.58	-	-	254	126	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

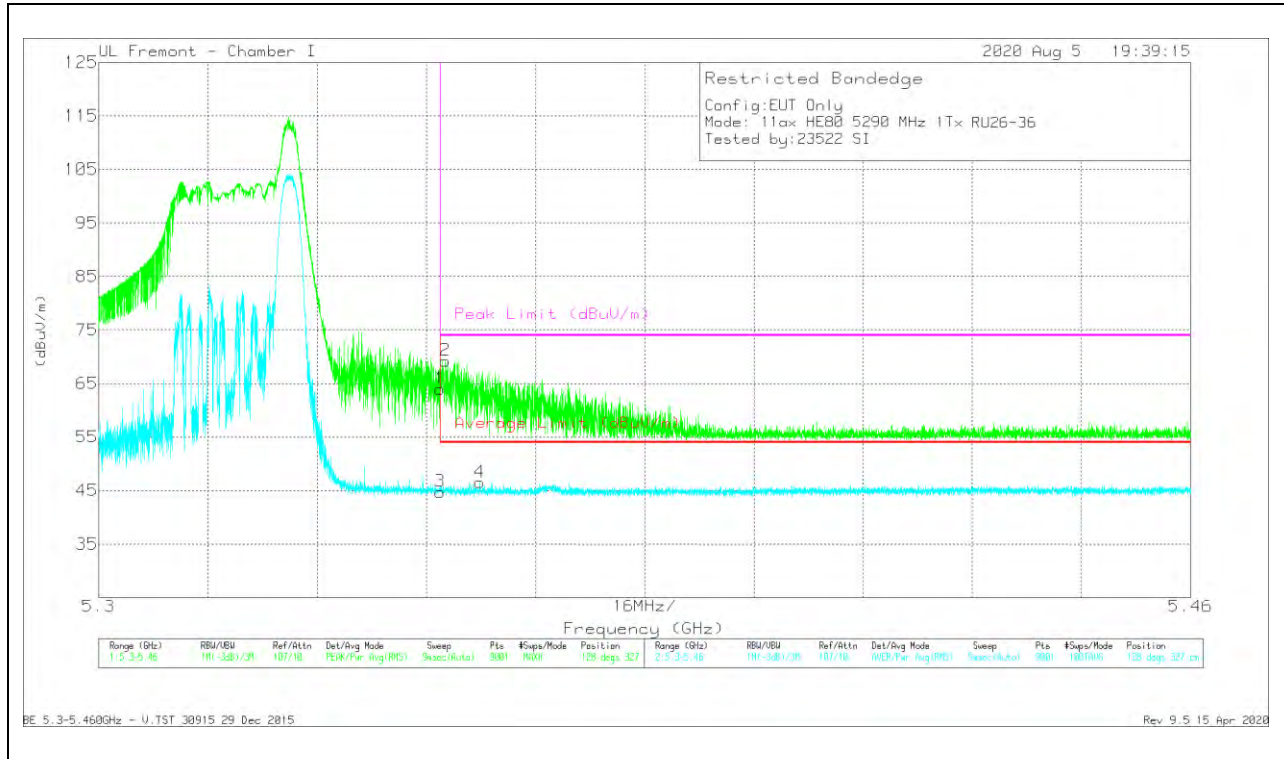


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbll/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	43.42	Pk	34.6	-14	64.02	-	-	74	-9.98	128	327	V
2	* 5.35076	48.65	Pk	34.6	-14	69.25	-	-	74	-4.75	128	327	V
3	* 5.35001	24.18	RMS	34.6	-14	44.78	54	-9.22	-	-	128	327	V
4	* 5.35581	25.93	RMS	34.6	-14	46.53	54	-7.47	-	-	128	327	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

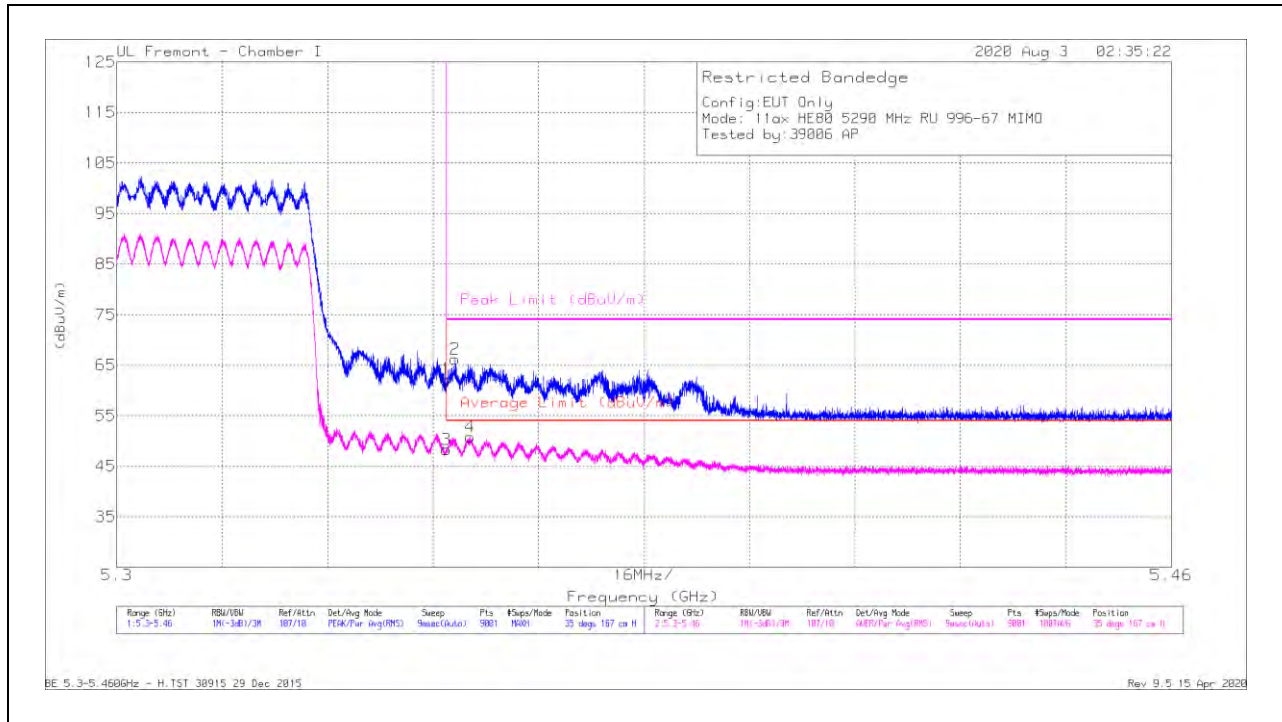

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/Paid (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	41.55	Pk	34.6	-14	62.15	-	-	74	-11.85	35	167	H
2	* 5.35133	45.53	Pk	34.6	-14	66.13	-	-	74	-7.87	35	167	H
3	* 5.35001	27.65	RMS	34.6	-14	48.25	54	-5.75	-	-	35	167	H
4	* 5.35358	30.24	RMS	34.6	-14	50.84	54	-3.16	-	-	35	167	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

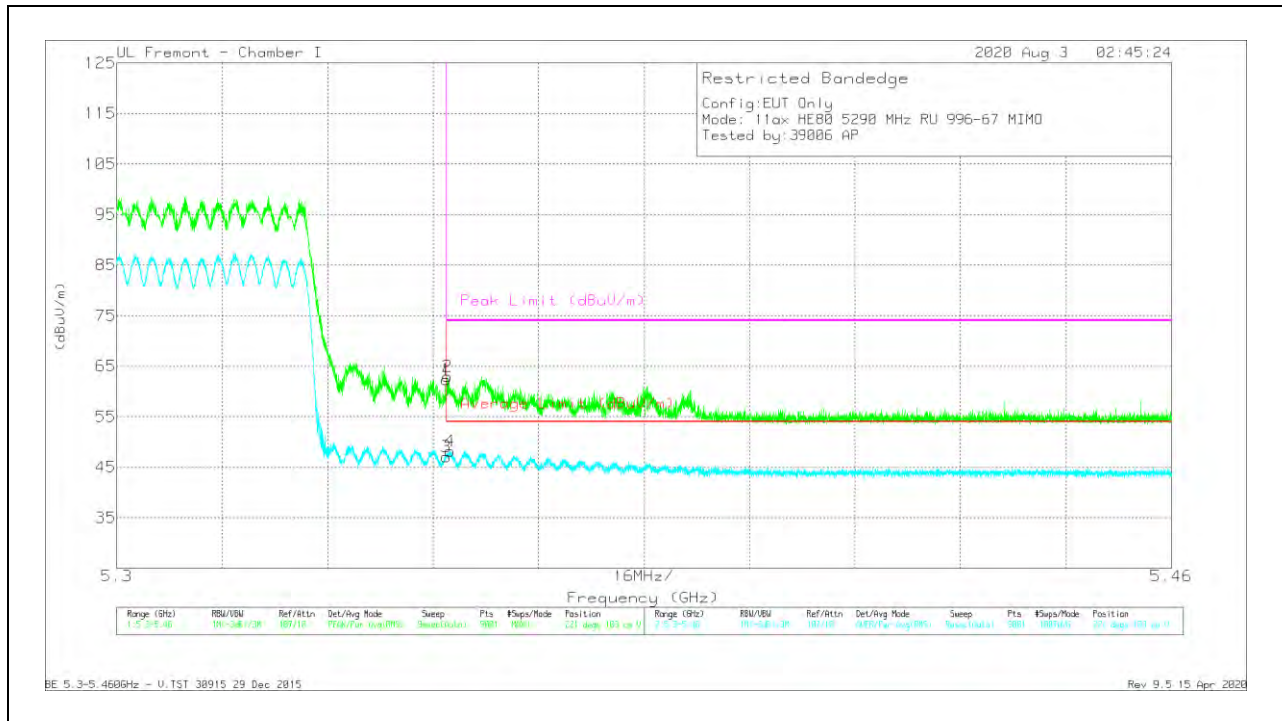


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	41.79	Pk	34.6	-14	62.39	-	-	74	-11.61	221	103	V
2	* 5.35015	42.4	Pk	34.6	-14	63	-	-	74	-11	221	103	V
3	* 5.35001	26.45	RMS	34.6	-14	47.05	54	-6.95	-	-	221	103	V
4	* 5.35006	27.58	RMS	34.6	-14	48.18	54	-5.82	-	-	221	103	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

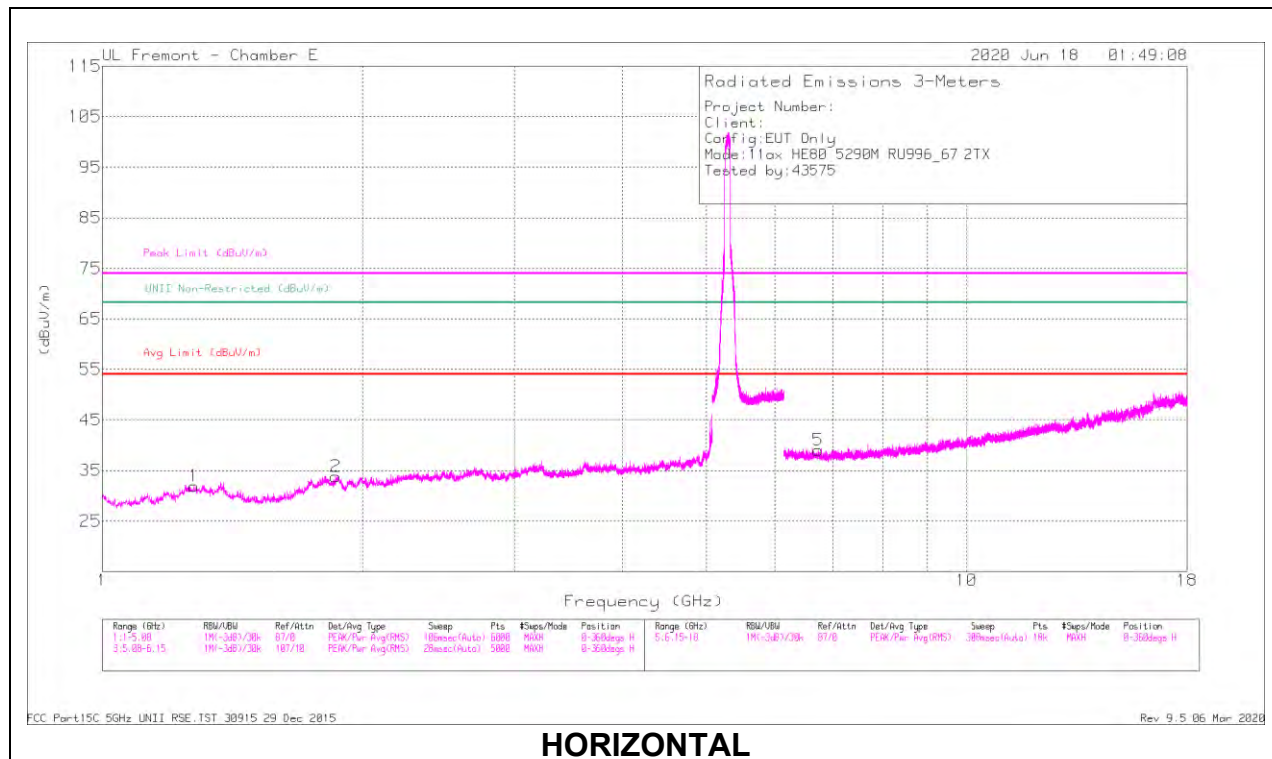

HORIZONTAL

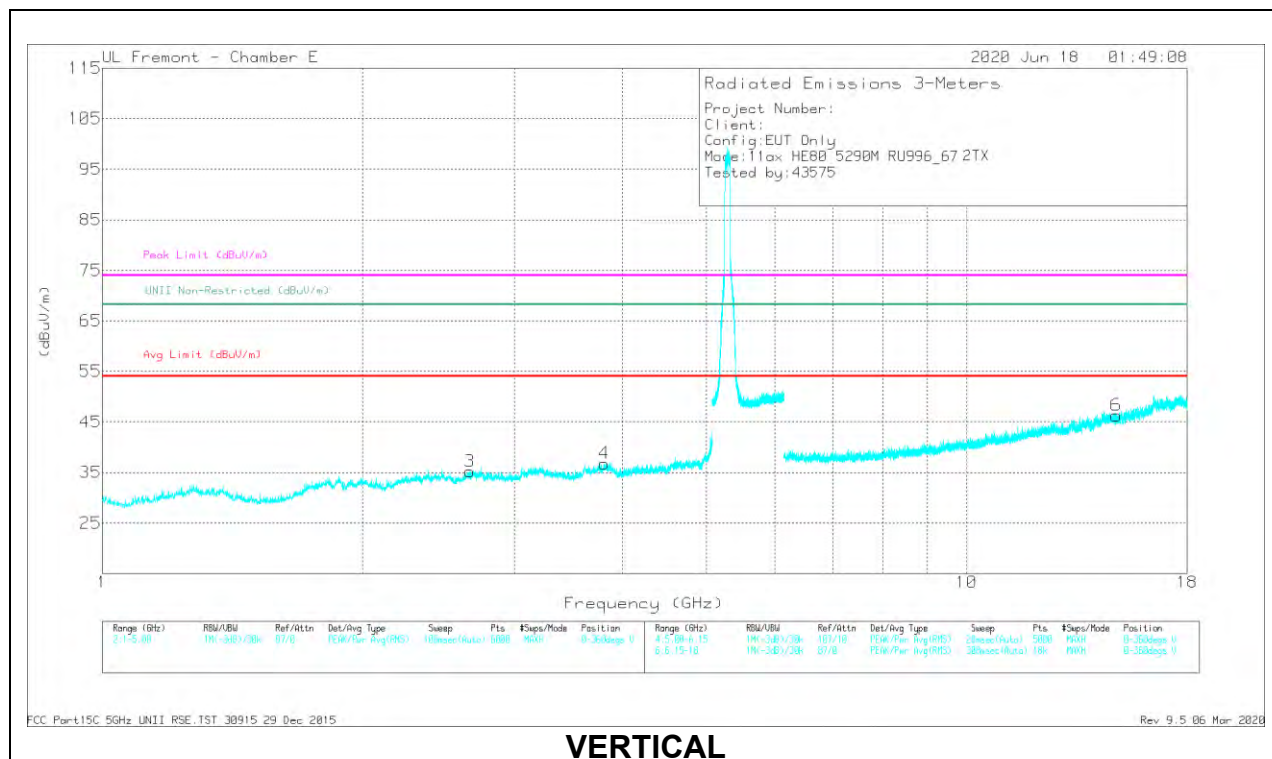

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.27516	44.97	PK-U	29.7	-34.8	39.87	-	-	74	-34.13	-	-	0	200	H
	* 1.27729	33.43	ADR	29.7	-34.9	28.23	54	-25.77	-	-	-	-	0	200	H
3	* 2.66009	45.68	PK-U	32.7	-35.8	42.58	-	-	74	-31.42	-	-	0	200	V
	* 2.66035	34.09	ADR	32.7	-35.8	30.99	54	-23.01	-	-	-	-	0	200	V
4	* 3.81132	42.9	PK-U	33.6	-32.5	44	-	-	74	-30	-	-	0	200	V
	* 3.80946	31.47	ADR	33.6	-32.4	32.67	54	-21.33	-	-	-	-	0	200	V
2	1.8615	45.57	PK-U	31	-35.1	41.47	-	-	-	-	68.2	-26.73	0	101	H
5	6.73194	38.41	PK-U	35.8	-28.4	45.81	-	-	-	-	68.2	-22.39	0	101	H
6	14.90835	35.34	PK-U	39.8	-21.6	53.54	-	-	-	-	68.2	-14.66	0	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 26 Tones, RU Index 36

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

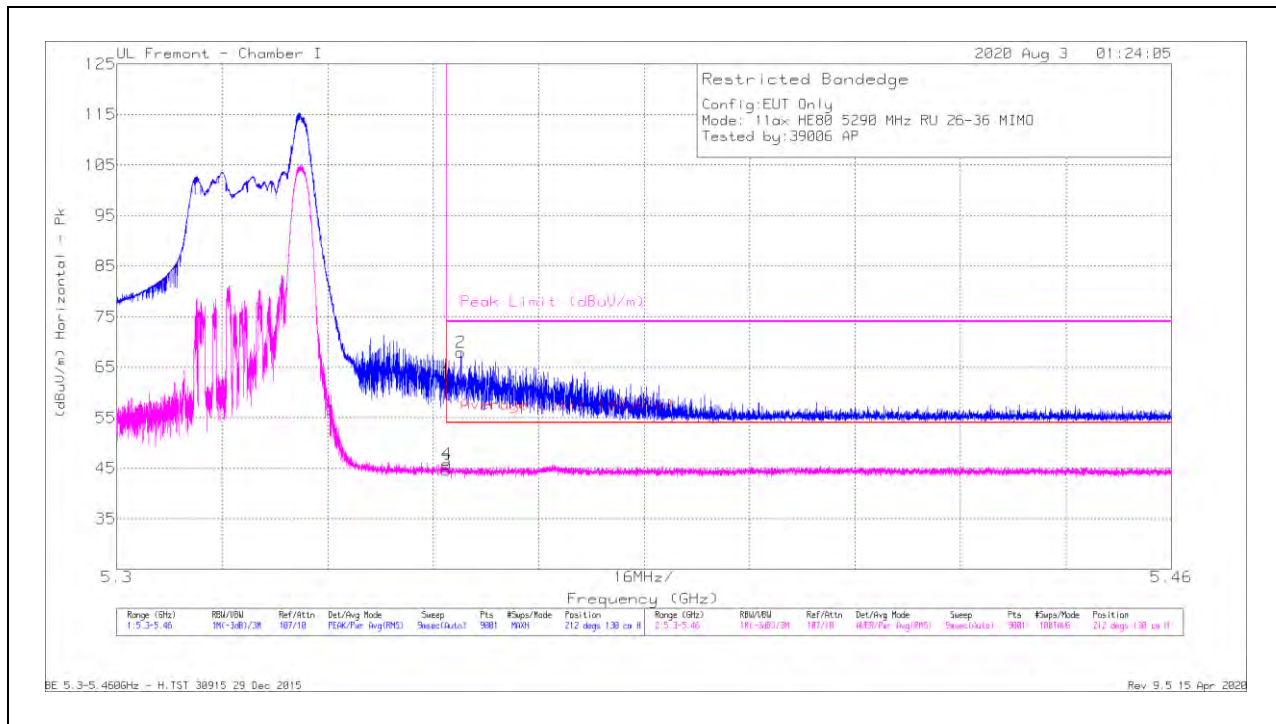

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	41.49	Pk	34.6	-14	62.09	-	-	74	-11.91	212	130	H
2	* 5.35221	47.35	Pk	34.6	-14	67.95	-	-	74	-6.05	212	130	H
3	* 5.35001	23.93	RMS	34.6	-14	44.53	54	-9.47	-	-	212	130	H
4	* 5.35012	25.27	RMS	34.6	-14	45.87	54	-8.13	-	-	212	130	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection


VERTICAL RESULT

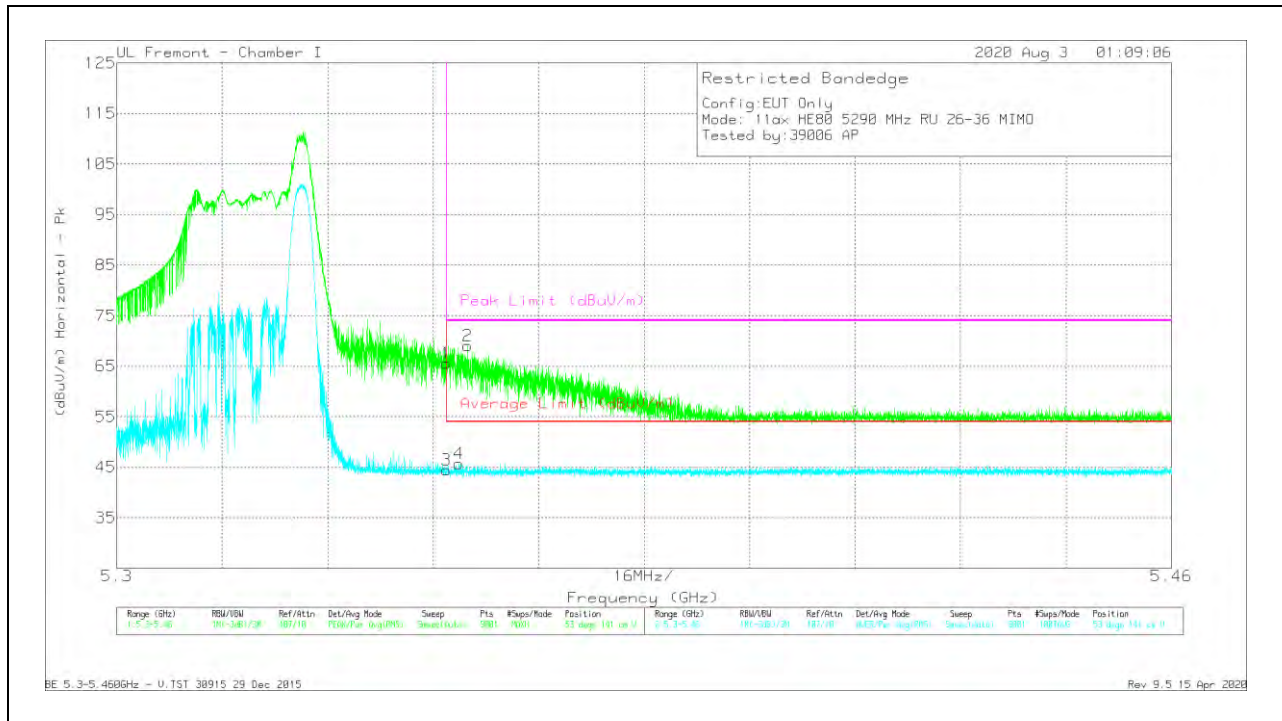


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

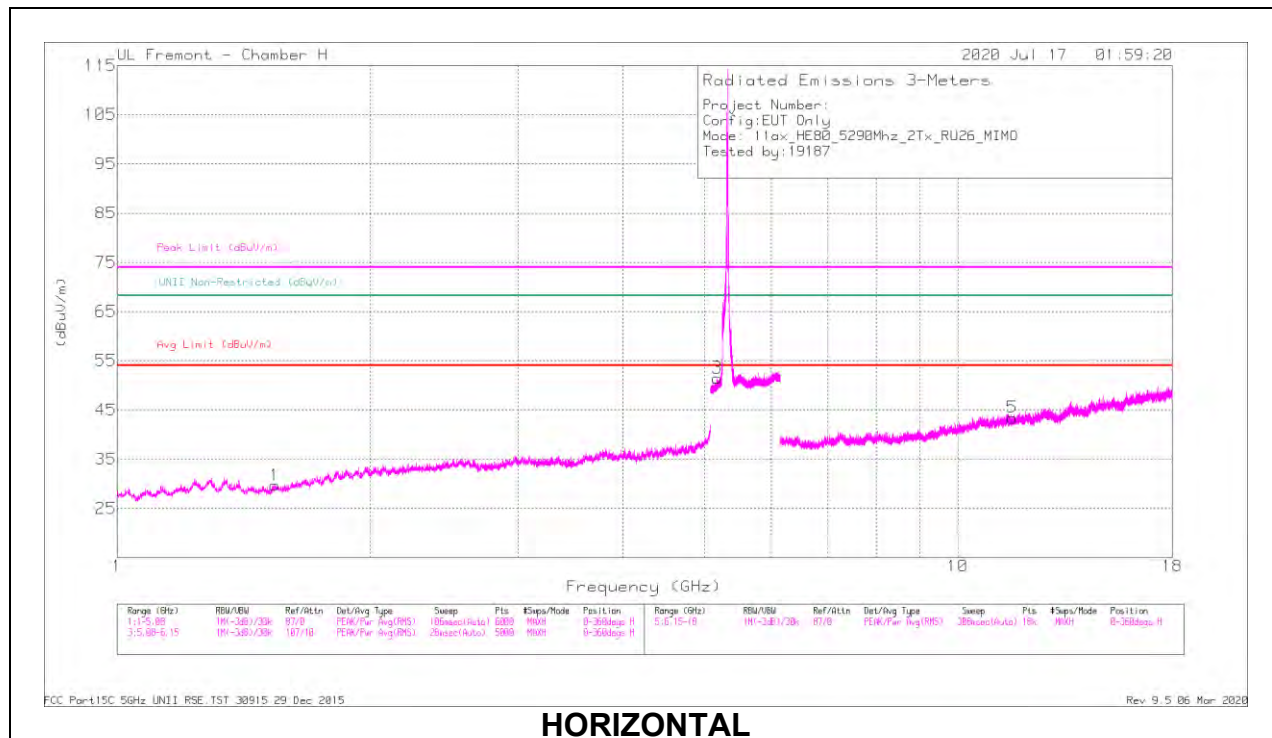

HORIZONTAL

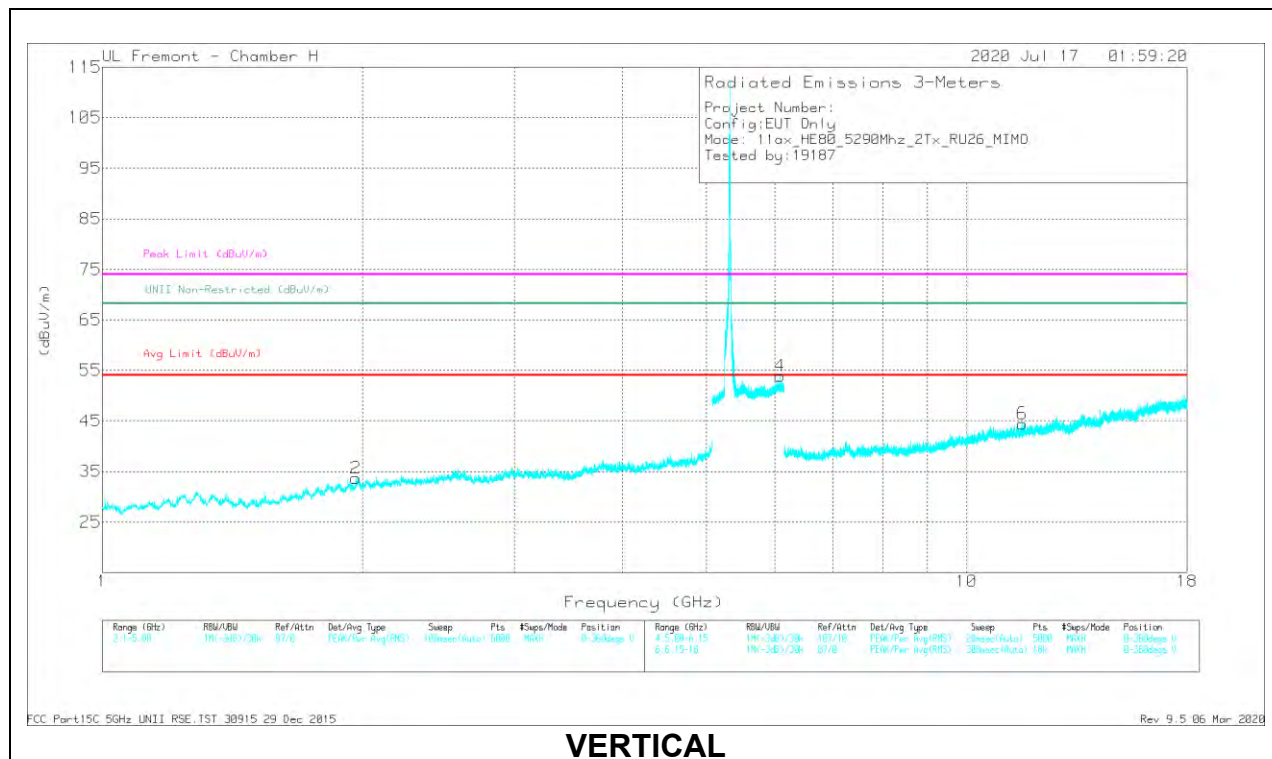

VERTICAL

RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.53964	43.98	PK-U	28	-34.7	37.28	-	-	74	-36.72	-	-	360	200	H
	* 1.54039	32.37	ADR	28	-34.8	25.77	54	-28.23	-	-	-	-	360	200	H
5	* 11.61167	35.71	PK-U	38.3	-23.5	50.51	-	-	74	-23.49	-	-	360	199	H
	* 11.60944	24.77	ADR	38.3	-23.7	39.37	54	-14.63	-	-	-	-	360	199	H
6	* 11.59858	36.51	PK-U	38.3	-24	50.81	-	-	74	-23.19	-	-	360	199	V
	* 11.59721	24.86	ADR	38.3	-23.9	39.26	54	-14.74	-	-	-	-	360	199	V
2	1.96479	43.67	PK-U	31.5	-34.3	40.87	-	-	-	-	68.2	-27.33	360	101	V
3	5.17486	44.6	PK-U	34.4	-21.4	57.6	-	-	-	-	68.2	-10.6	360	101	H
4	6.08743	44.27	PK-U	35.6	-20.2	59.67	-	-	-	-	68.2	-8.53	360	199	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

6.1.13. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND

1TX ANTENNA 6

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

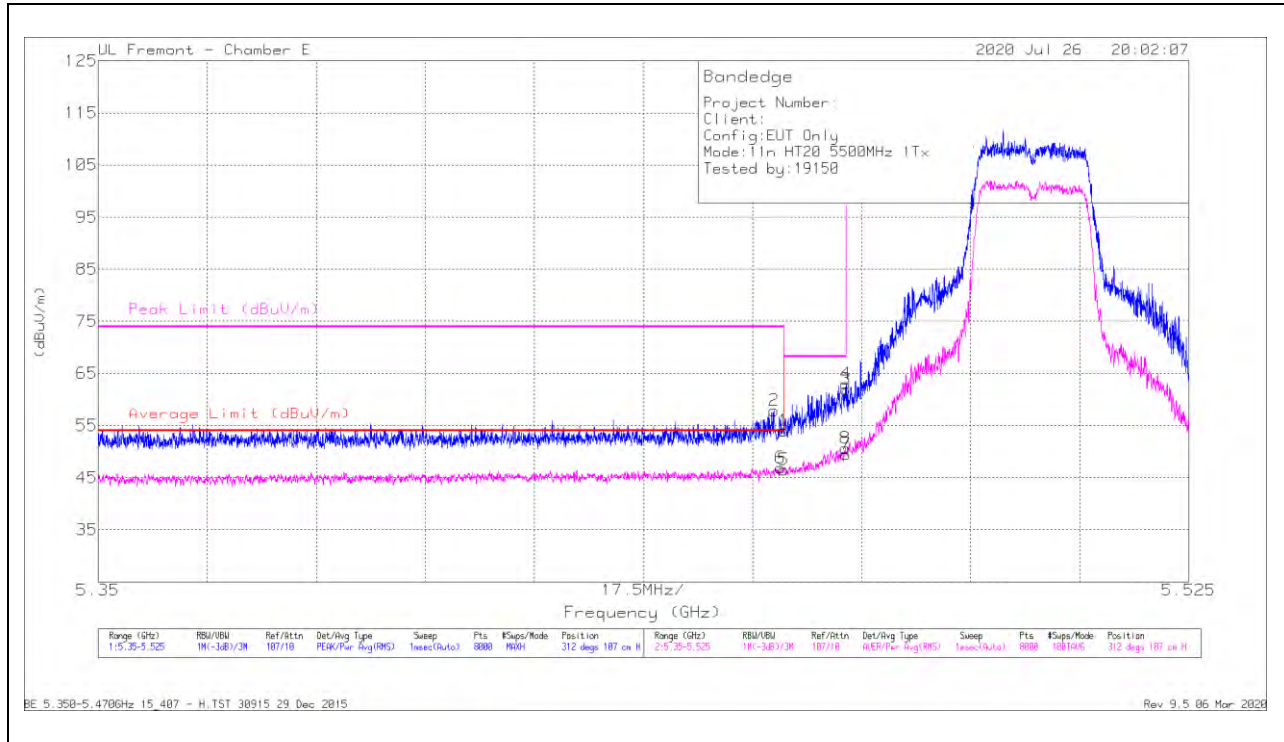

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF TT12 (dBm)	Amp/ChlFilt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.14	Pk	34.5	-21.7	0	53.94	-	-	74	-20.06	312	107	H
2	* 5.45845	45.01	Pk	34.6	-21.7	0	57.91	-	-	74	-16.09	312	107	H
5	* 5.45998	33.13	RMS	34.5	-21.7	.35	46.28	54	-7.72	-	-	312	107	H
6	* 5.45948	33.44	RMS	34.6	-21.7	.35	46.69	54	-7.31	-	-	312	107	H
8	5.46987	37.14	RMS	34.6	-21.7	.35	50.39	-	-	-	-	312	107	H
4	5.46996	50.1	Pk	34.6	-21.7	0	63	-	-	68.2	-5.2	312	107	H
3	5.46998	49.04	Pk	34.6	-21.7	0	61.94	-	-	68.2	-6.26	312	107	H
7	5.46998	36.08	RMS	34.6	-21.7	.35	49.33	-	-	-	-	312	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

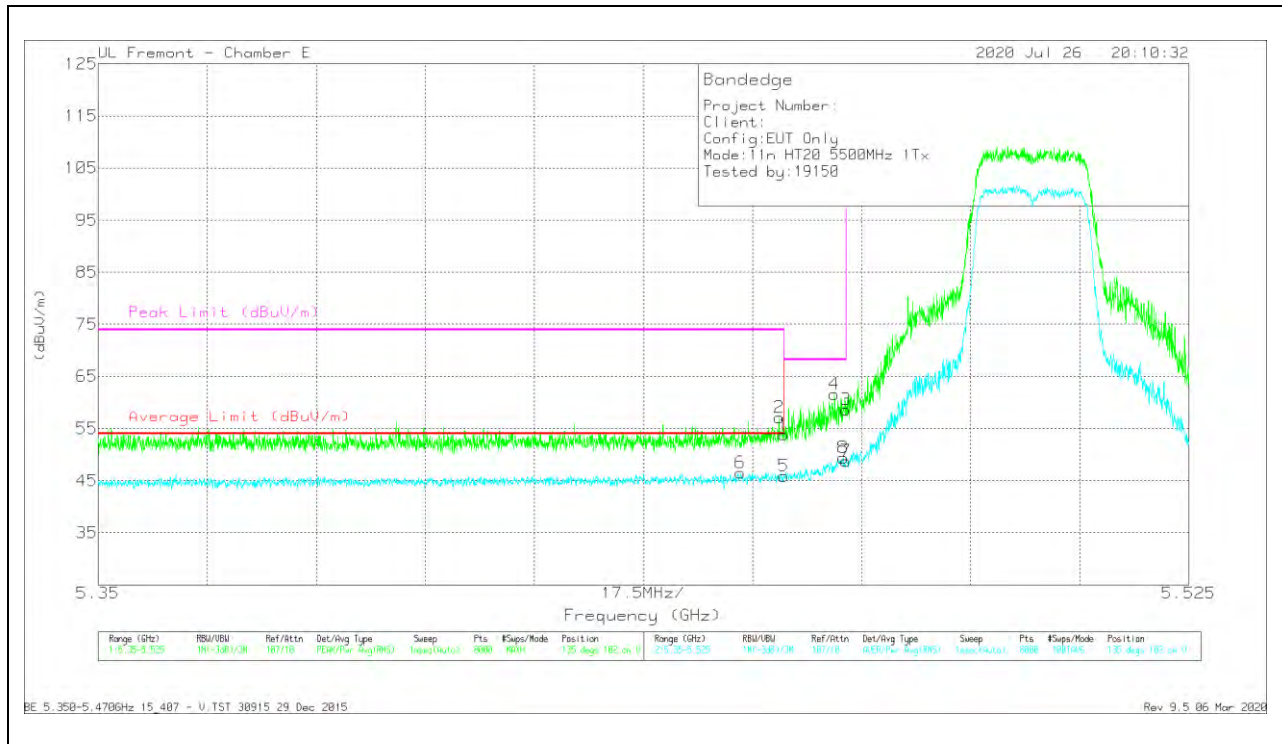


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1712 (dBm)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.45998	41.03	PK	34.5	-21.7	0	53.83	-	-	74	-20.17	135	102	V
2	*5.45926	44.16	PK	34.6	-21.7	0	57.06	-	-	74	-16.94	135	102	V
5	*5.45998	32.48	RMS	34.5	-21.7	.35	45.63	54	-8.37	-	-	135	102	V
6	*5.45305	33.14	RMS	34.5	-21.7	.35	46.29	54	-7.71	-	-	135	102	V
4	5.46814	48.82	PK	34.5	-21.7	0	61.62	-	-	68.2	-6.58	135	102	V
8	5.46952	35.95	RMS	34.6	-21.7	.35	49.20	-	-	-	-	135	102	V
3	5.46998	45.66	PK	34.6	-21.7	0	58.56	-	-	68.2	-9.64	135	102	V
7	5.46998	35.33	RMS	34.6	-21.7	.35	48.58	-	-	-	-	135	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

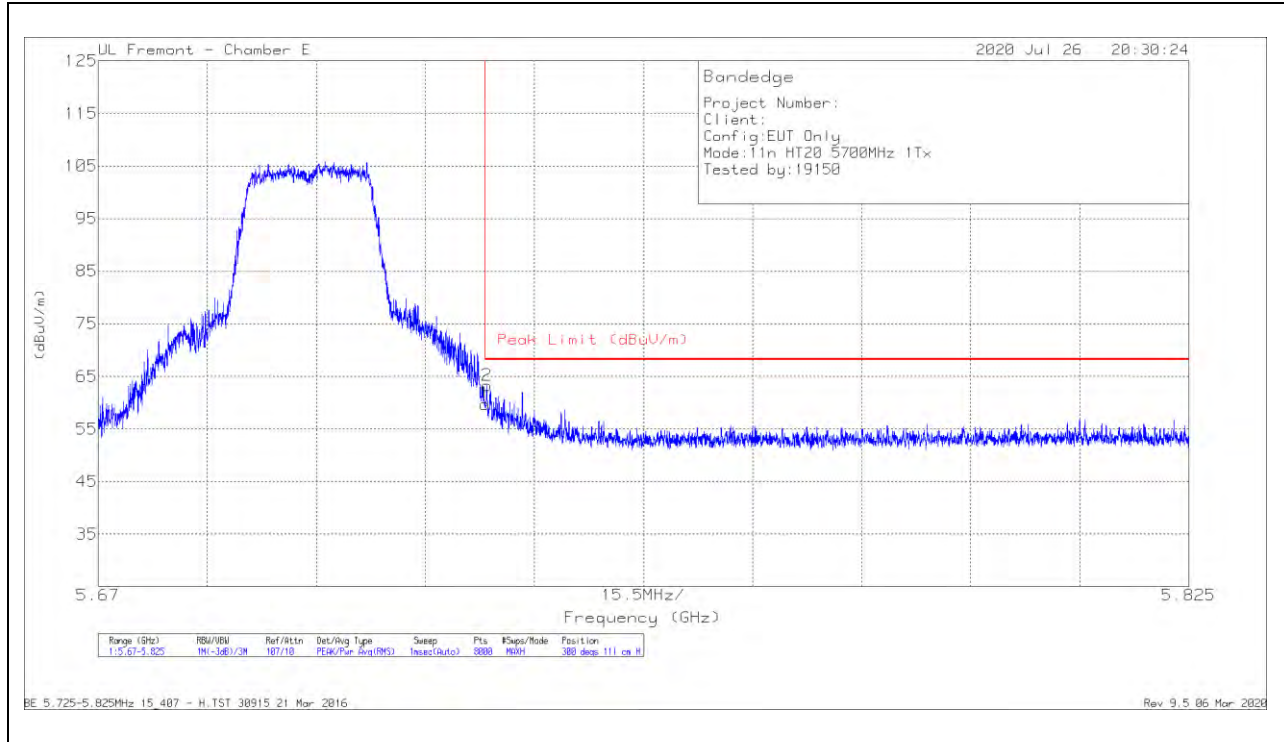

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.26	Pk	34.7	-21.2	0	59.76	68.2	-8.44	300	111	H
2	5.72522	49.79	Pk	34.7	-21.2	0	63.29	68.2	-4.91	300	111	H

Pk - Peak detector

VERTICAL RESULT

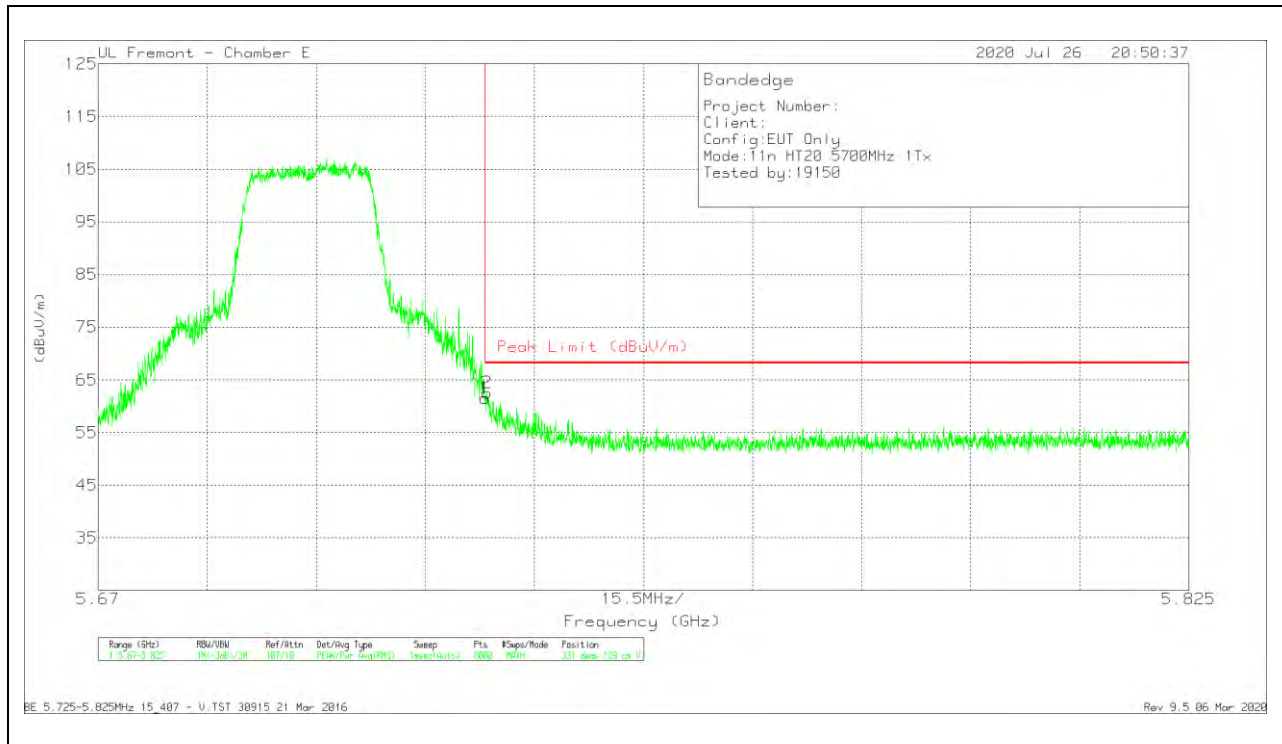


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	48.03	PK	34.7	-21.2	0	61.53	68.2	-6.67	331	129	V
2	5.72522	49.01	PK	34.7	-21.2	0	62.51	68.2	-5.69	331	129	V

Pk - Peak detector

1TX ANTENNA 5

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

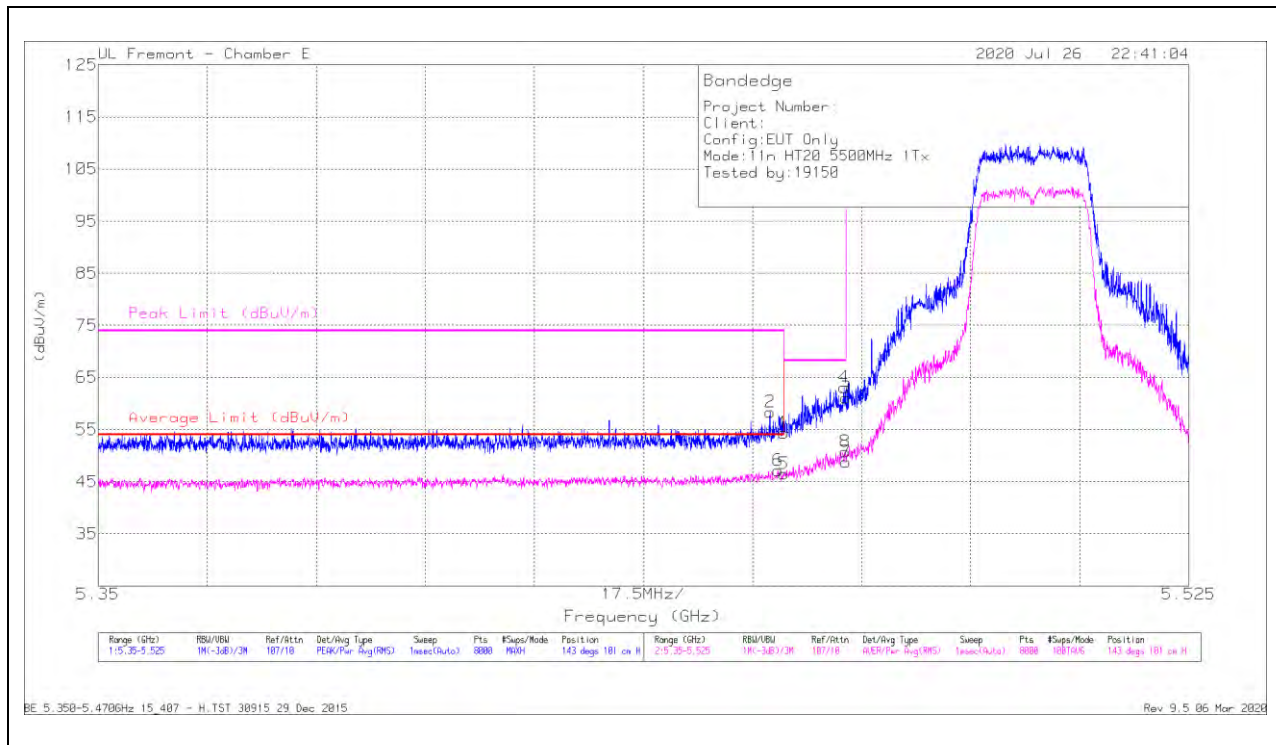

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degree)	Height (cm)	Polarity
1	* 5.45998	41.56	Pk	34.5	-21.7	0	54.36	-	-	74	-19.64	143	101	H
2	* 5.45779	45.46	Pk	34.6	-21.7	0	58.36	-	-	74	-15.64	143	101	H
5	* 5.45998	33.17	RMS	34.5	-21.7	.35	46.32	54	-7.68	-	-	143	101	H
6	* 5.45996	33.71	RMS	34.6	-21.7	.35	46.96	54	-7.04	-	-	143	101	H
4	5.46965	50.24	Pk	34.6	-21.7	0	63.14	-	-	68.2	-5.06	143	101	H
8	5.46985	37.25	RMS	34.6	-21.7	.35	50.50	-	-	-	-	143	101	H
3	5.46998	48.21	Pk	34.6	-21.7	0	61.11	-	-	68.2	-7.09	143	101	H
7	5.46998	35.24	RMS	34.6	-21.7	.35	48.49	-	-	-	-	143	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

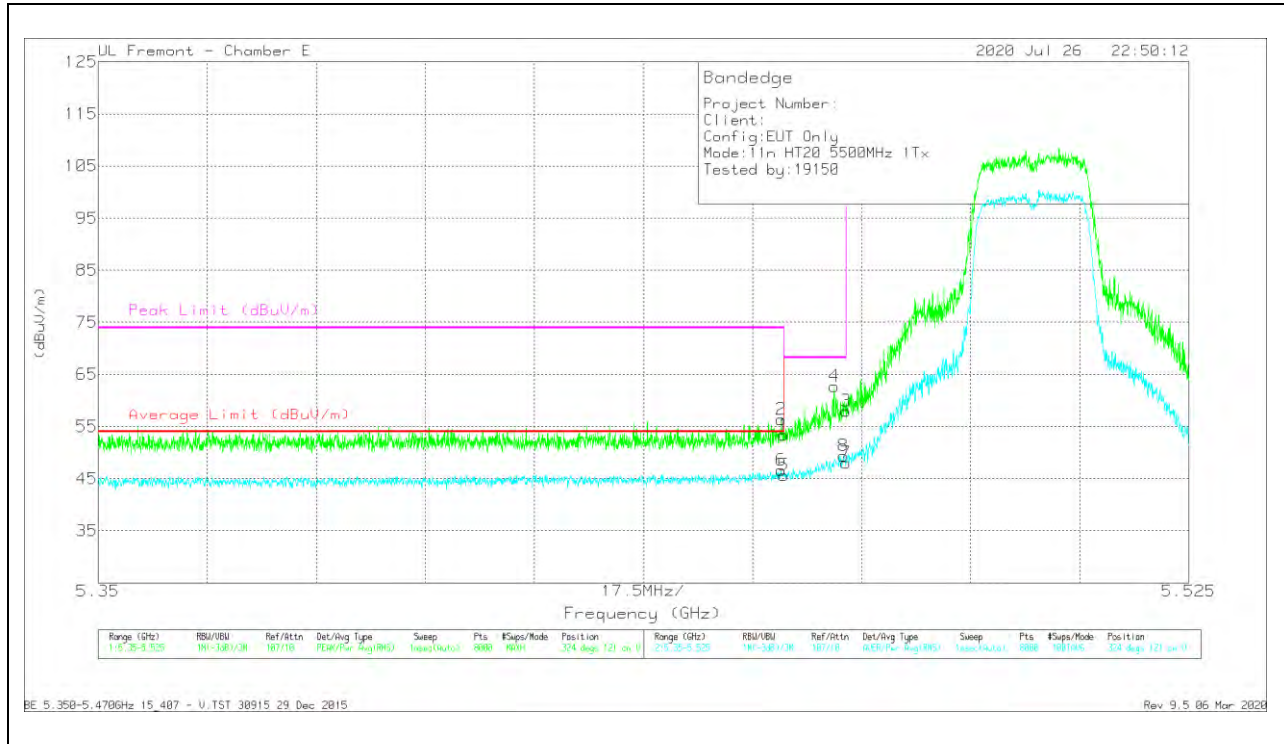


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1712 (dBm)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.45998	40.61	PK	34.5	-21.7	0	53.41	-	-	74	-20.59	324	121	V
2	*5.45959	43.42	PK	34.6	-21.7	0	56.32	-	-	74	-17.66	324	121	V
5	*5.45998	32.31	RMS	34.5	-21.7	.35	45.46	54	-8.54	-	-	324	121	V
6	*5.45954	33.22	RMS	34.6	-21.7	.35	46.47	54	-7.53	-	-	324	121	V
4	5.4681	49.94	PK	34.5	-21.7	0	62.74	-	-	68.2	-5.46	324	121	V
8	5.46961	35.96	RMS	34.6	-21.7	.35	49.21	-	-	-	-	324	121	V
3	5.46998	45.1	PK	34.6	-21.7	0	58	-	-	68.2	-10.2	324	121	V
7	5.46998	34.59	RMS	34.6	-21.7	.35	47.84	-	-	-	-	324	121	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

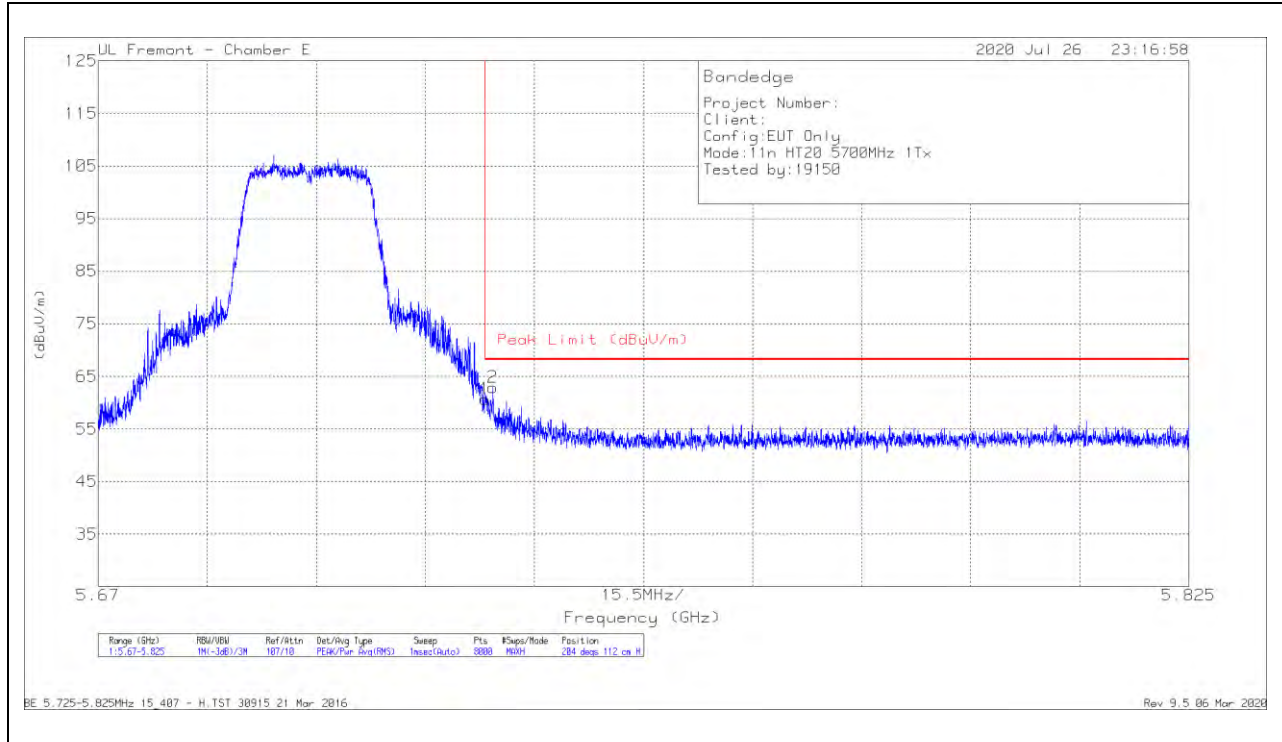

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.23	Pk	34.7	-21.2	0	60.73	68.2	-7.47	204	112	H
2	5.72608	49.39	Pk	34.7	-21.2	0	62.89	68.2	-5.31	204	112	H

Pk - Peak detector

VERTICAL RESULT

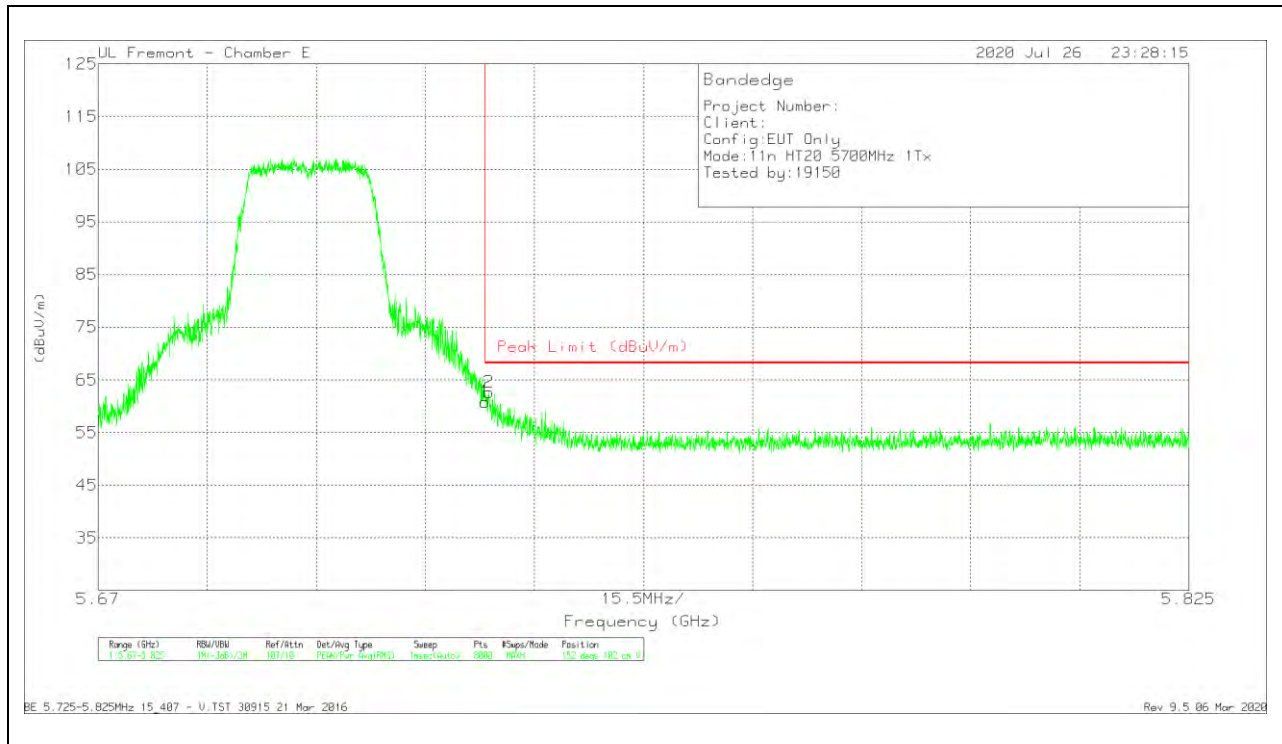


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.35	PK	34.7	-21.2	0	60.85	68.2	-7.35	152	102	V
2	5.72552	49.19	PK	34.7	-21.2	0	62.69	68.2	-5.51	152	102	V

Pk - Peak detector

2TX ANTENNA 6 + ANTENNA 5 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

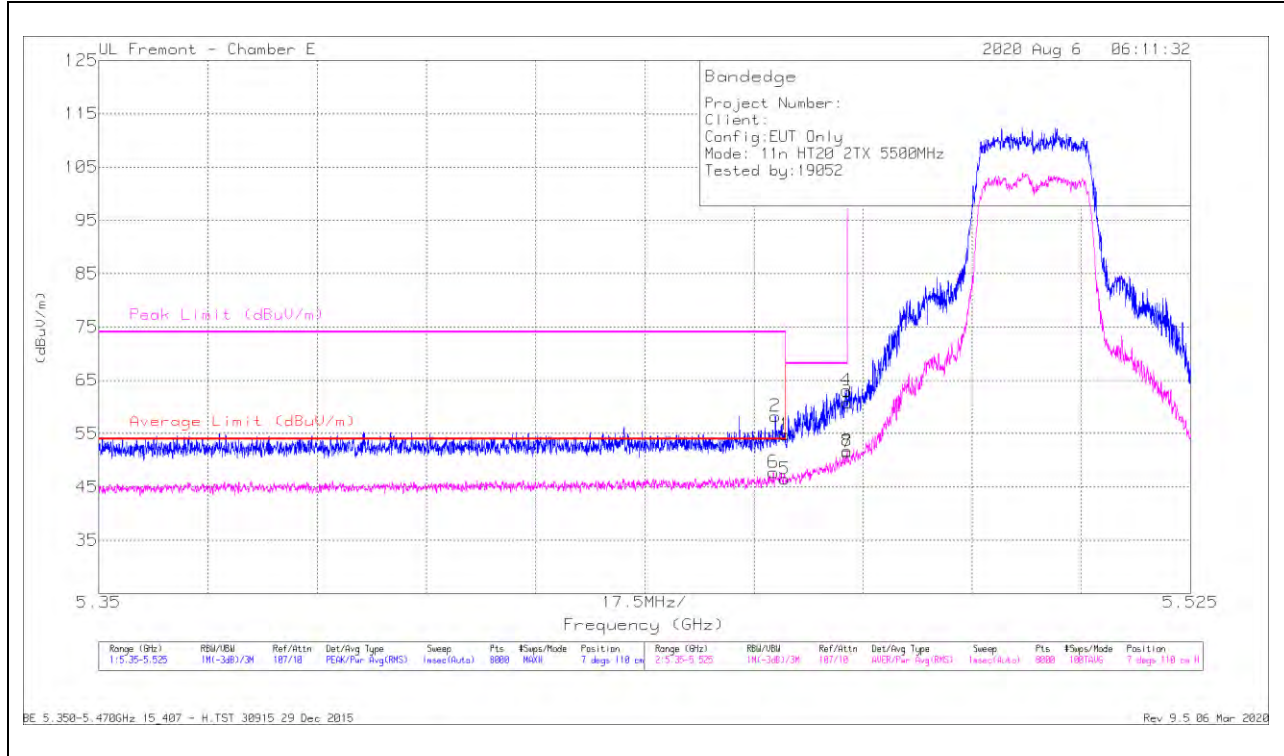

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T112 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.98	PK	34.5	-21.7	0	54.78	-	-	74	-19.22	7	110	H
2	* 5.45843	45.38	PK	34.6	-21.7	0	58.28	-	-	74	-15.72	7	110	H
5	* 5.45998	33.09	RMS	34.5	-21.7	.58	46.47	54	-7.53	-	-	7	110	H
6	* 5.45812	34.28	RMS	34.6	-21.7	.58	47.74	54	-6.28	-	-	7	110	H
4	5.46983	50.18	PK	34.6	-21.7	0	63.08	-	-	68.2	-5.12	7	110	H
8	5.46996	38.24	RMS	34.6	-21.7	.58	51.72	-	-	-	-	7	110	H
3	5.46998	47.96	PK	34.6	-21.7	0	60.86	-	-	68.2	-7.34	7	110	H
7	5.46998	38	RMS	34.6	-21.7	.58	51.48	-	-	-	-	7	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

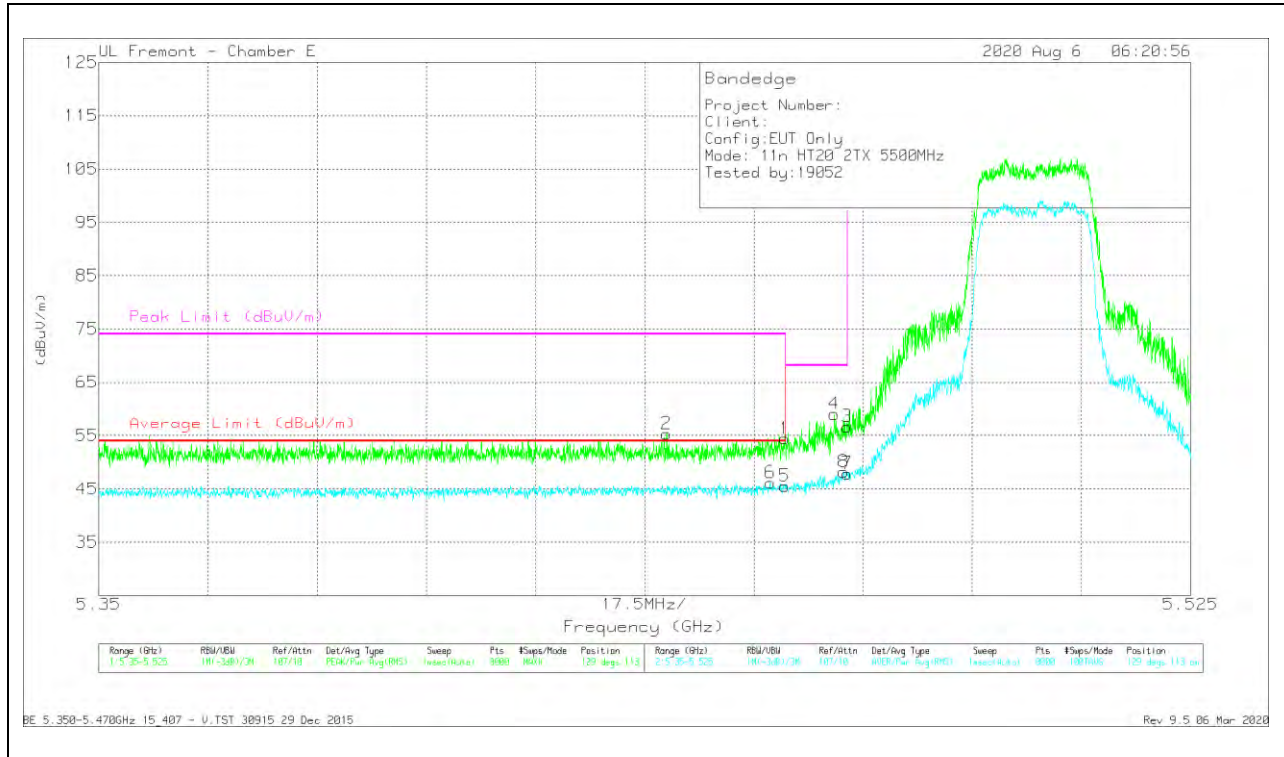


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.61	Pk	34.5	-21.7	0	54.41	-	-	74	-19.59	129	113	V
2	* 5.44101	42.53	Pk	34.5	-21.7	0	55.33	-	-	74	-18.67	129	113	V
5	* 5.45998	32.15	RMS	34.5	-21.7	.58	45.53	54	-8.47	-	-	129	113	V
6	* 5.45762	32.67	RMS	34.6	-21.7	.58	46.15	54	-7.85	-	-	129	113	V
4	5.46788	46.23	Pk	34.5	-21.7	0	59.03	-	-	68.2	-9.17	129	113	V
8	5.46939	34.73	RMS	34.6	-21.7	.58	48.21	-	-	-	-	129	113	V
3	5.46998	43.76	Pk	34.6	-21.7	0	56.66	-	-	68.2	-11.54	129	113	V
7	5.46998	34.38	RMS	34.6	-21.7	.58	47.86	-	-	-	-	129	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

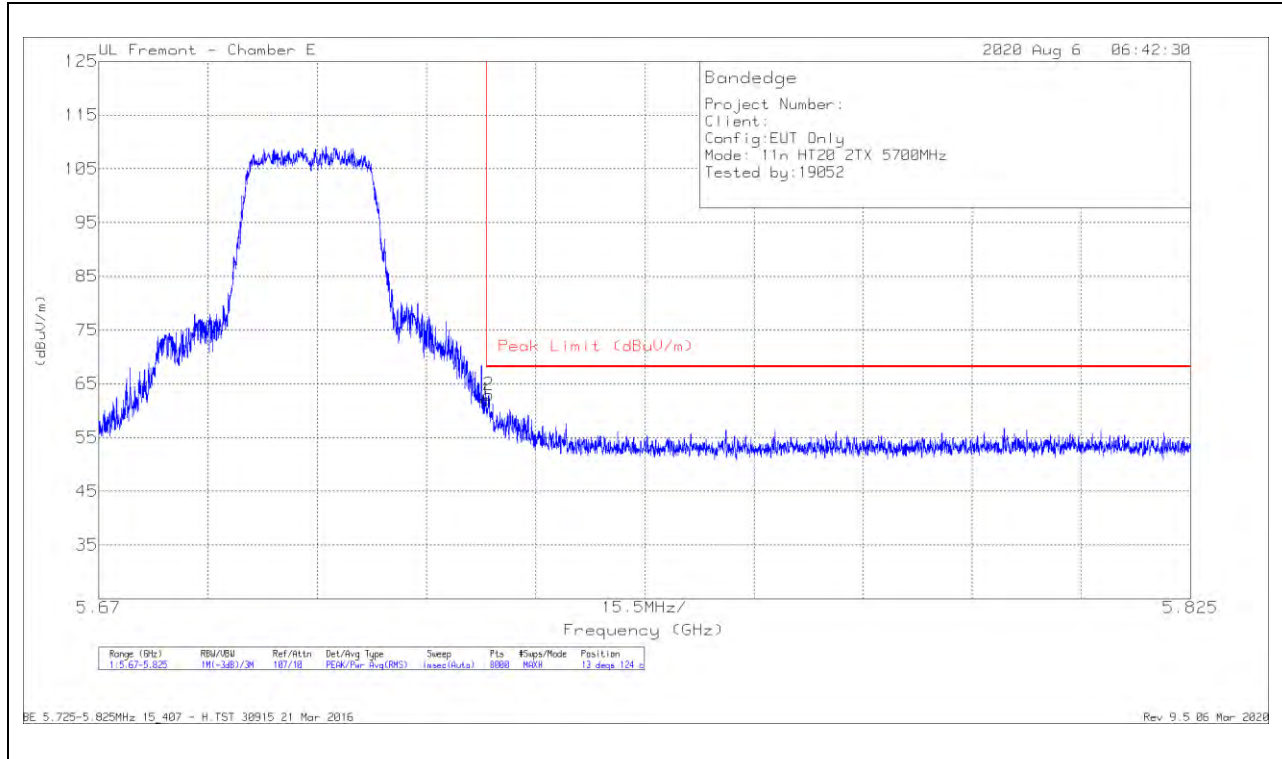

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	48.58	Pk	34.7	-21.2	0	62.08	68.2	-6.12	13	124	H
2	5.7254	49.47	Pk	34.7	-21.2	0	62.97	68.2	-5.23	13	124	H

Pk - Peak detector

VERTICAL RESULT

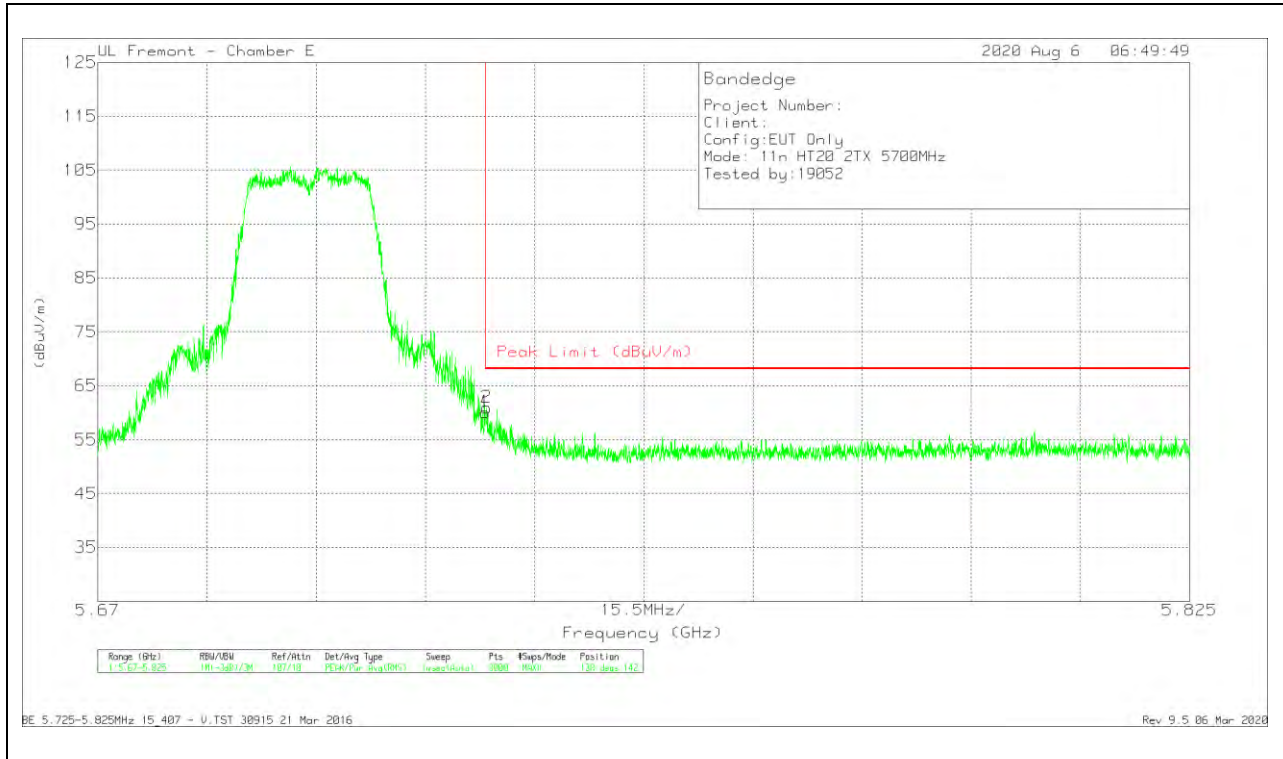


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Parad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.57	PK	34.7	-21.2	0	60.07	68.2	-8.13	138	142	V
2	5.72519	47.46	PK	34.7	-21.2	0	60.96	68.2	-7.24	138	142	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

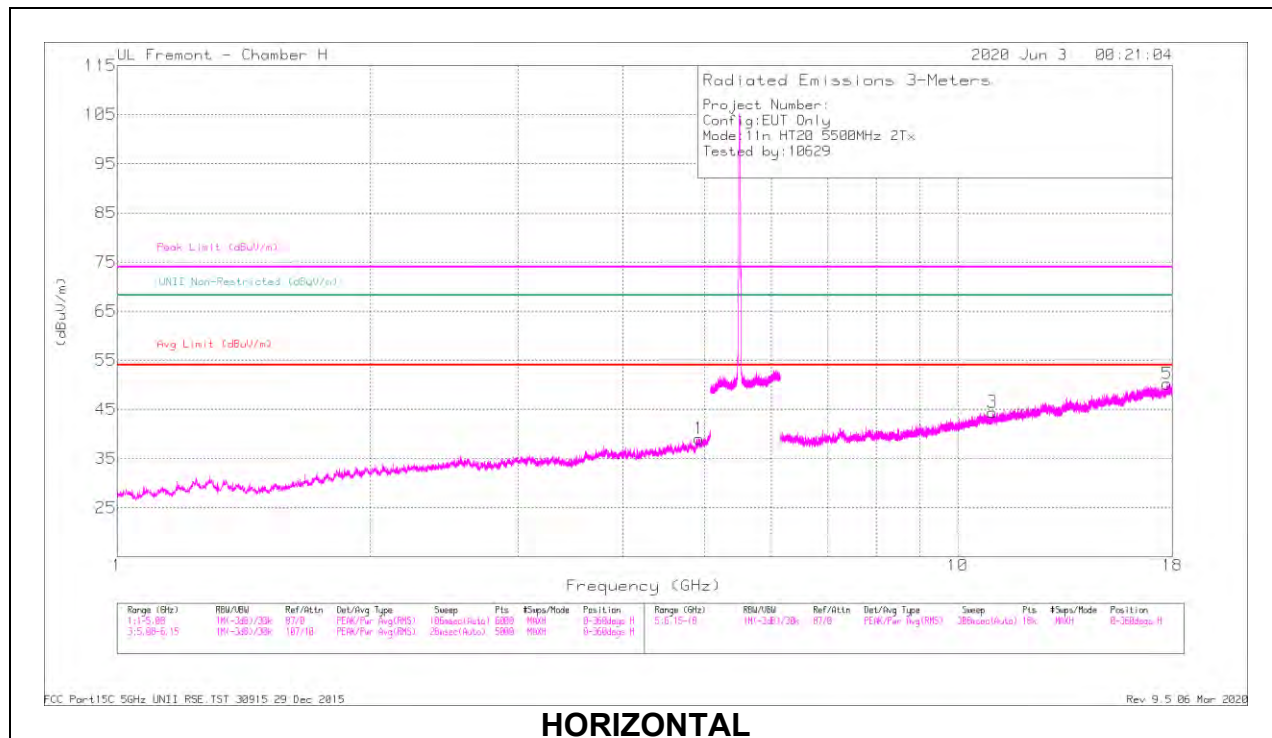

HORIZONTAL

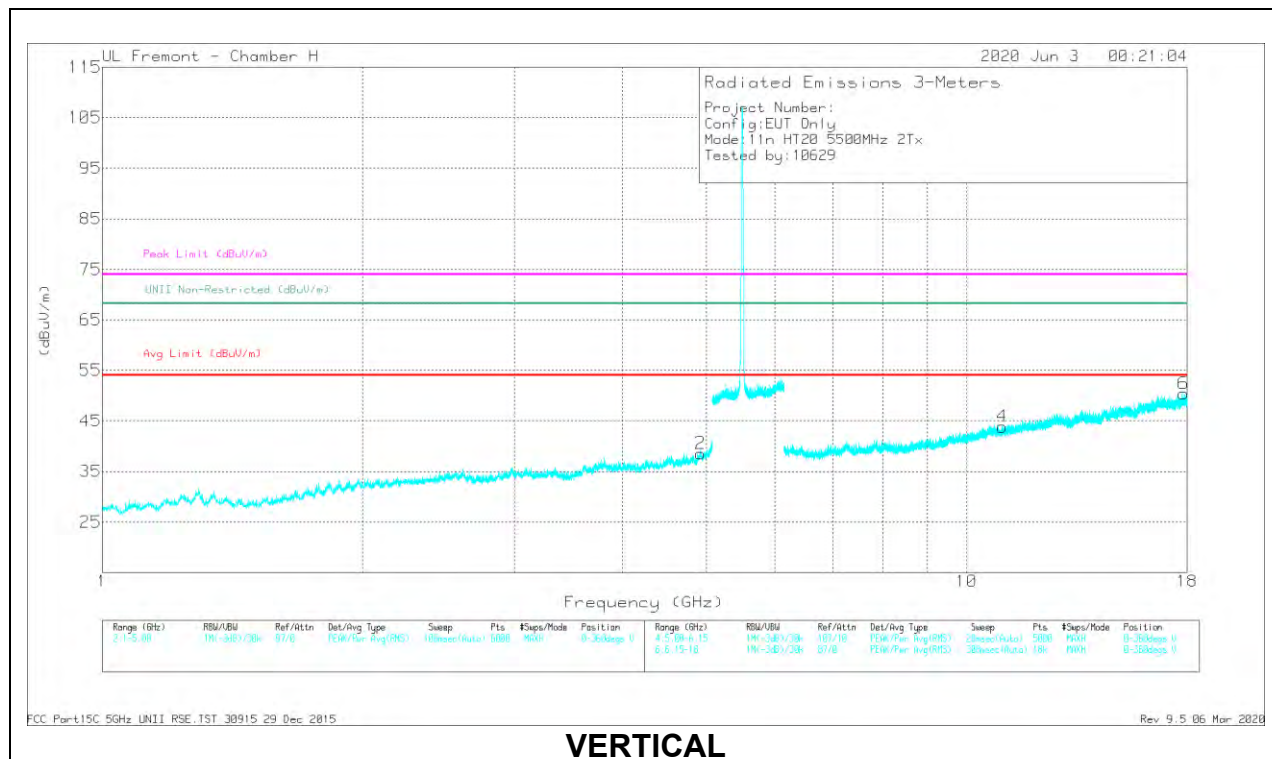

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.92472	41.86	PK-U	34.1	-30.3	45.66	-	-	74	-28.34	195	388	H
	* 4.92469	30.61	ADR	34.1	-30.3	34.41	54	-19.59	-	-	195	388	H
	* 4.92419	42.3	PK-U	34.1	-30.3	46.1	-	-	74	-27.9	71	251	V
2	* 4.92417	30.85	ADR	34.1	-30.3	34.45	54	-19.55	-	-	71	251	V
	* 11.00123	36.32	PK-U	37.7	-24.1	49.92	-	-	74	-24.08	26	344	H
	* 10.99968	25.71	ADR	37.7	-24.2	39.21	54	-14.79	-	-	26	344	H
5	* 17.75354	36.46	PK-U	41.4	-20.6	57.26	-	-	74	-16.74	101	311	H
	* 17.75378	25.17	ADR	41.4	-20.6	45.97	54	-8.03	-	-	101	311	H
	* 10.99086	37.81	PK-U	37.7	-24.2	51.31	-	-	74	-22.69	303	193	V
4	* 11.00354	25.81	ADR	37.7	-24	39.51	54	-14.49	-	-	303	193	V
	* 17.82433	36.44	PK-U	41.5	-20.8	57.14	-	-	74	-16.86	231	112	V
6	* 17.82441	25.14	ADR	41.5	-20.8	45.84	54	-8.16	-	-	231	112	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

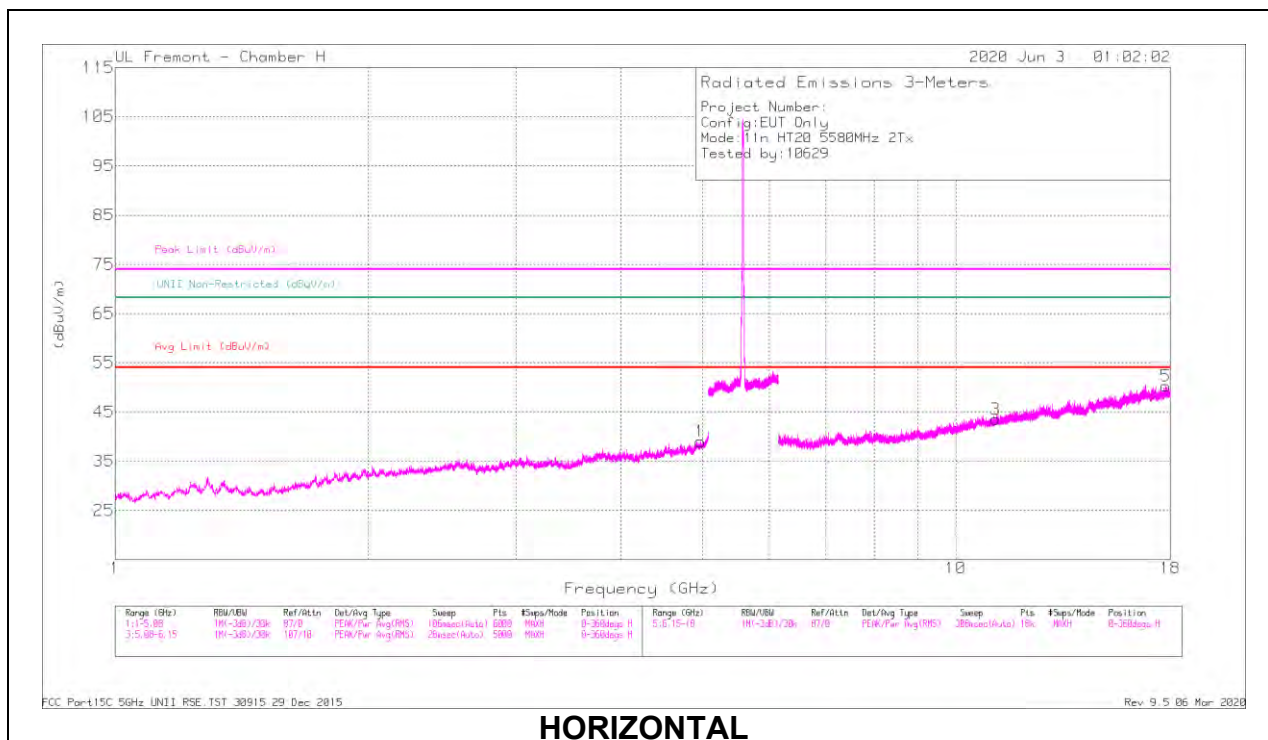

HORIZONTAL

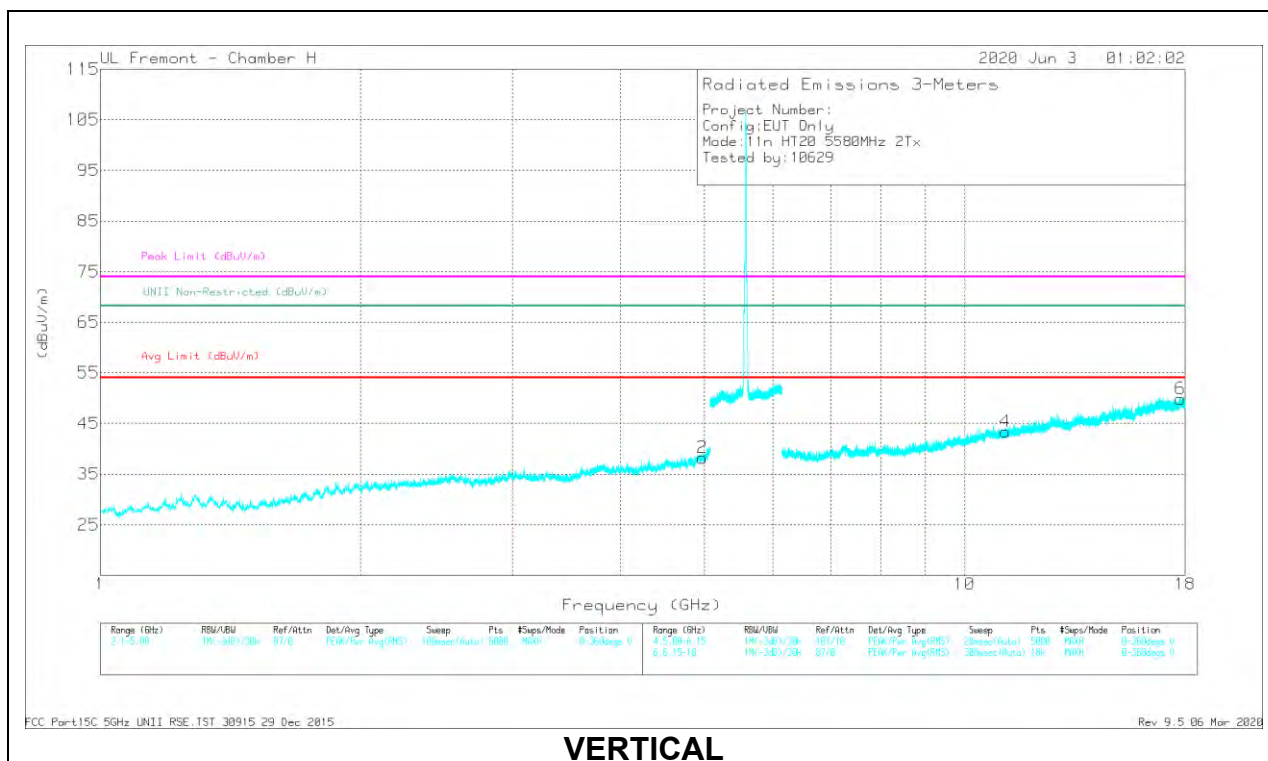


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.98957	40.79	PK-U	34.2	-29.9	45.09	-	-	74	-28.91	36	307	H
	* 4.98748	29.85	ADR	34.2	-29.9	34.15	54	-19.85	-	-	36	307	H
2	* 4.97201	41.47	PK-U	34.3	-29.9	45.87	-	-	74	-28.13	101	354	V
	* 4.97124	29.98	ADR	34.3	-29.9	34.38	54	-19.62	-	-	101	354	V
3	* 11.15253	36.79	PK-U	37.8	-23.9	50.69	-	-	74	-23.31	237	281	H
	* 11.15427	25.84	ADR	37.8	-23.9	39.74	54	-14.26	-	-	237	281	H
5	* 17.78804	36.49	PK-U	41.5	-20.9	57.09	-	-	74	-16.91	334	220	H
	* 17.78889	25.13	ADR	41.4	-20.9	45.63	54	-8.37	-	-	334	220	H
4	* 11.15601	37.01	PK-U	37.8	-23.9	50.91	-	-	74	-23.09	220	156	V
	* 11.15567	25.79	ADR	37.8	-23.9	39.69	54	-14.31	-	-	220	156	V
6	* 17.79104	35.81	PK-U	41.5	-20.9	56.41	-	-	74	-17.59	113	130	V
	* 17.79157	25.21	ADR	41.5	-20.9	45.81	54	-8.19	-	-	113	130	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

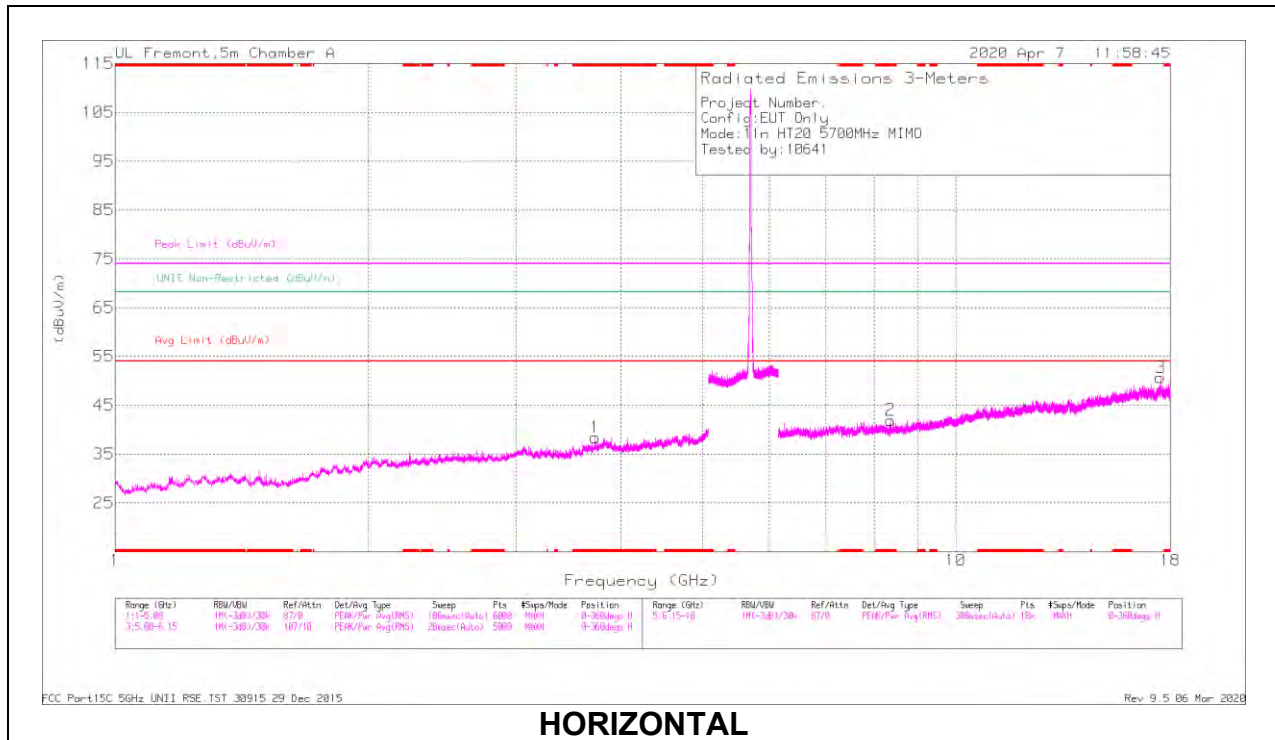

HORIZONTAL

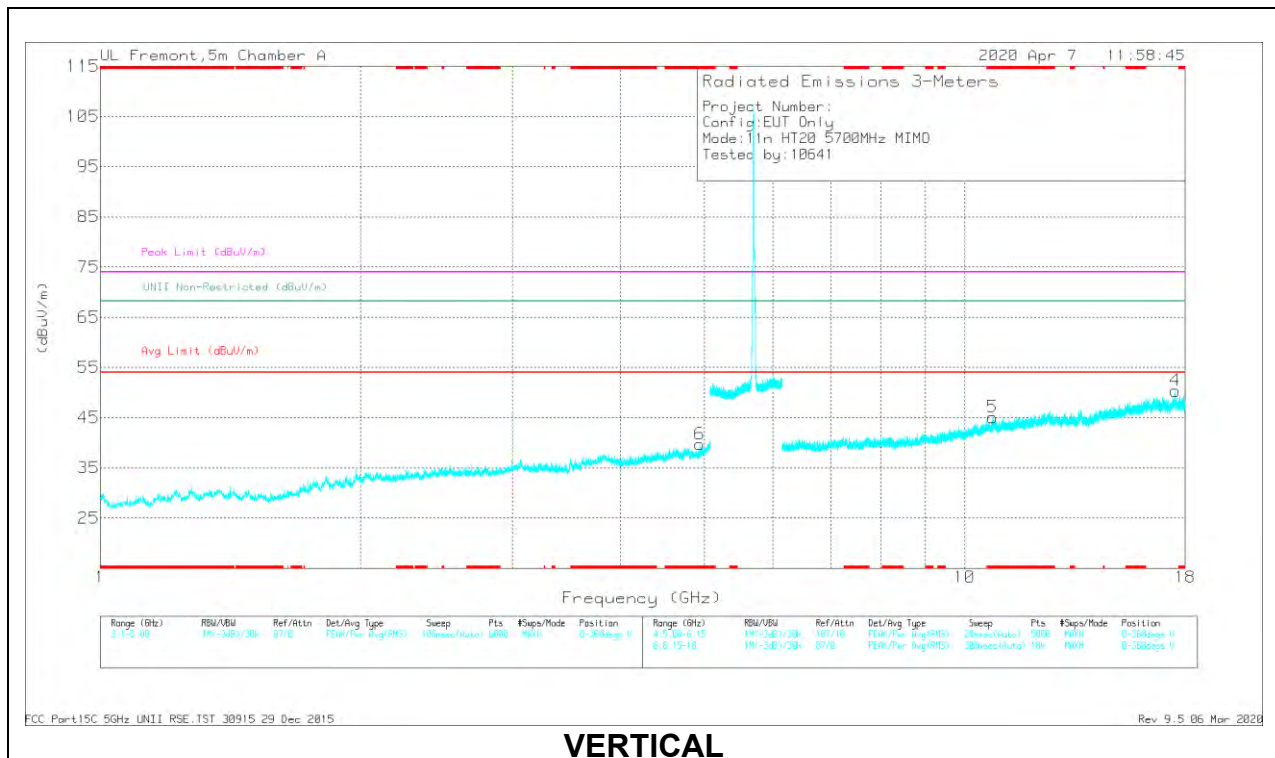



VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.72662	40.99	PK-U	33.4	-30	44.39	-	-	74	-29.61	-	-	85	216	H
	* 3.72849	29.41	ADR	33.4	-30	32.81	54	-21.19	-	-	-	-	85	216	H
6	* 4.94301	38.29	PK-U	34.2	-27.6	44.89	-	-	74	-29.11	-	-	165	284	V
	* 4.94207	27.17	ADR	34.2	-27.7	33.67	54	-20.33	-	-	-	-	165	284	V
2	* 8.36291	35.44	PK-U	35.9	-23.7	47.64	-	-	74	-26.36	-	-	171	135	H
	* 8.36302	24.43	ADR	35.9	-23.7	36.63	54	-17.37	-	-	-	-	171	135	H
5	* 10.77336	33.93	PK-U	38	-20.9	51.03	-	-	74	-22.97	-	-	125	210	V
	* 10.77311	23.06	ADR	38	-20.9	40.16	54	-13.84	-	-	-	-	125	210	V
3	17.52662	33.69	PK-U	41.2	-18	56.89	-	-	-	-	68.2	-11.31	73	220	H
4	17.53154	34.58	PK-U	41.2	-18	57.78	-	-	-	-	68.2	-10.42	95	236	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

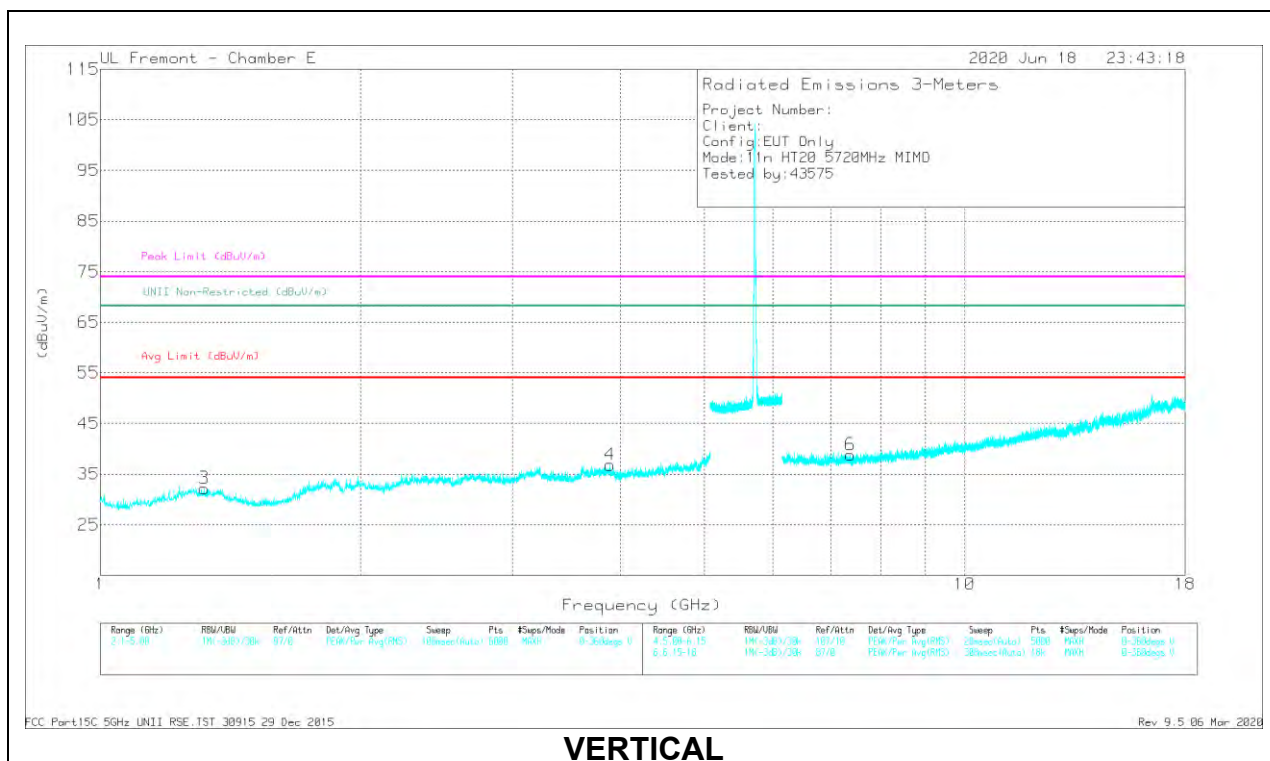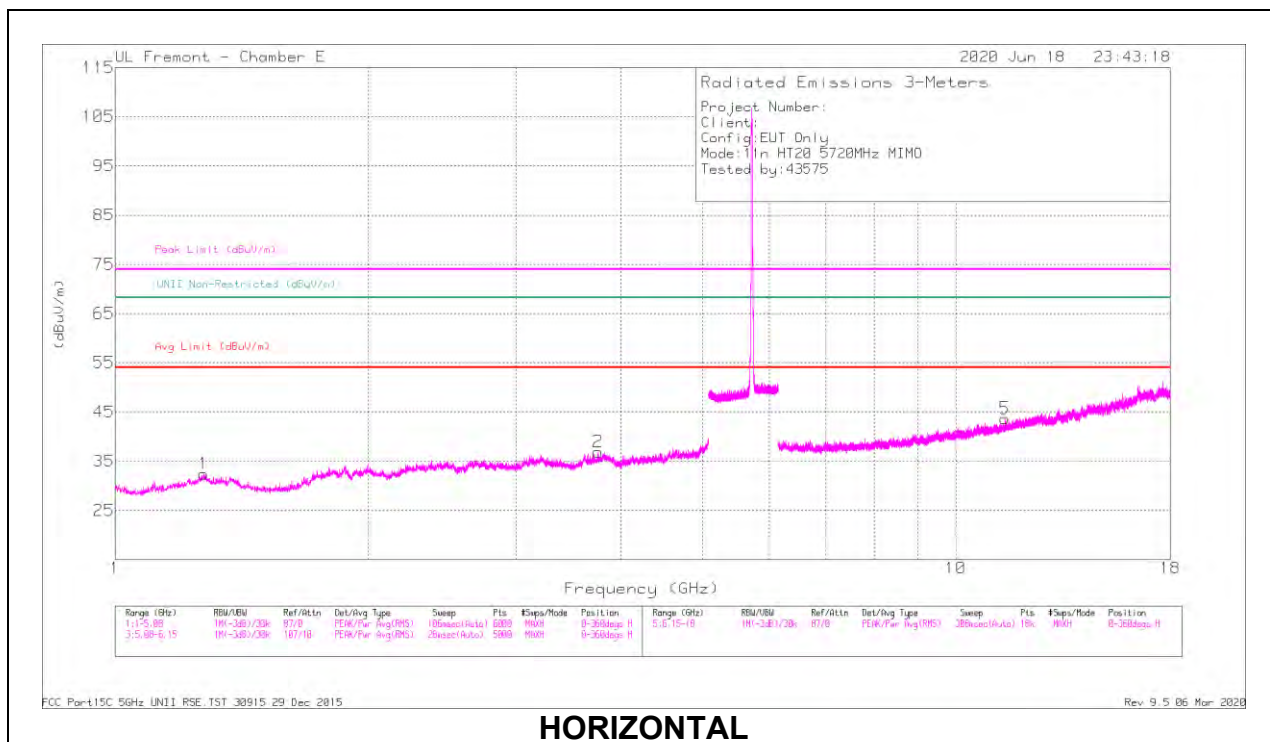

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.27487	45.04	PK-U	29.7	-34.8	39.94	-	-	74	-34.06	0	101	H
	* 1.27287	33.5	ADR	29.6	-34.8	28.3	54	-25.7	-	-	0	101	H
2	* 3.75311	42.41	PK-U	33.4	-32.9	42.91	-	-	74	-31.09	0	200	H
	* 3.75343	31.12	ADR	33.4	-32.9	31.62	54	-22.38	-	-	0	200	H
3	* 1.31864	45.84	PK-U	29.2	-35.1	39.94	-	-	74	-34.06	0	200	V
	* 1.31777	33.4	ADR	29.2	-35.1	27.5	54	-26.5	-	-	0	200	V
4	* 3.88956	43.05	PK-U	33.7	-33.1	43.65	-	-	74	-30.35	0	101	V
	* 3.88911	31.52	ADR	33.7	-33.1	32.12	54	-21.88	-	-	0	101	V
5	* 11.4434	36.27	PK-U	37.9	-24.3	49.87	-	-	74	-24.13	0	200	H
	* 11.44182	24.7	ADR	37.9	-24.3	38.3	54	-15.7	-	-	0	200	H
6	* 7.37917	38.48	PK-U	35.6	-28.5	45.58	-	-	74	-28.42	0	200	V
	* 7.37946	27.16	ADR	35.6	-28.6	34.16	54	-19.84	-	-	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

6.1.14. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND

1TX ANTENNA 6

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

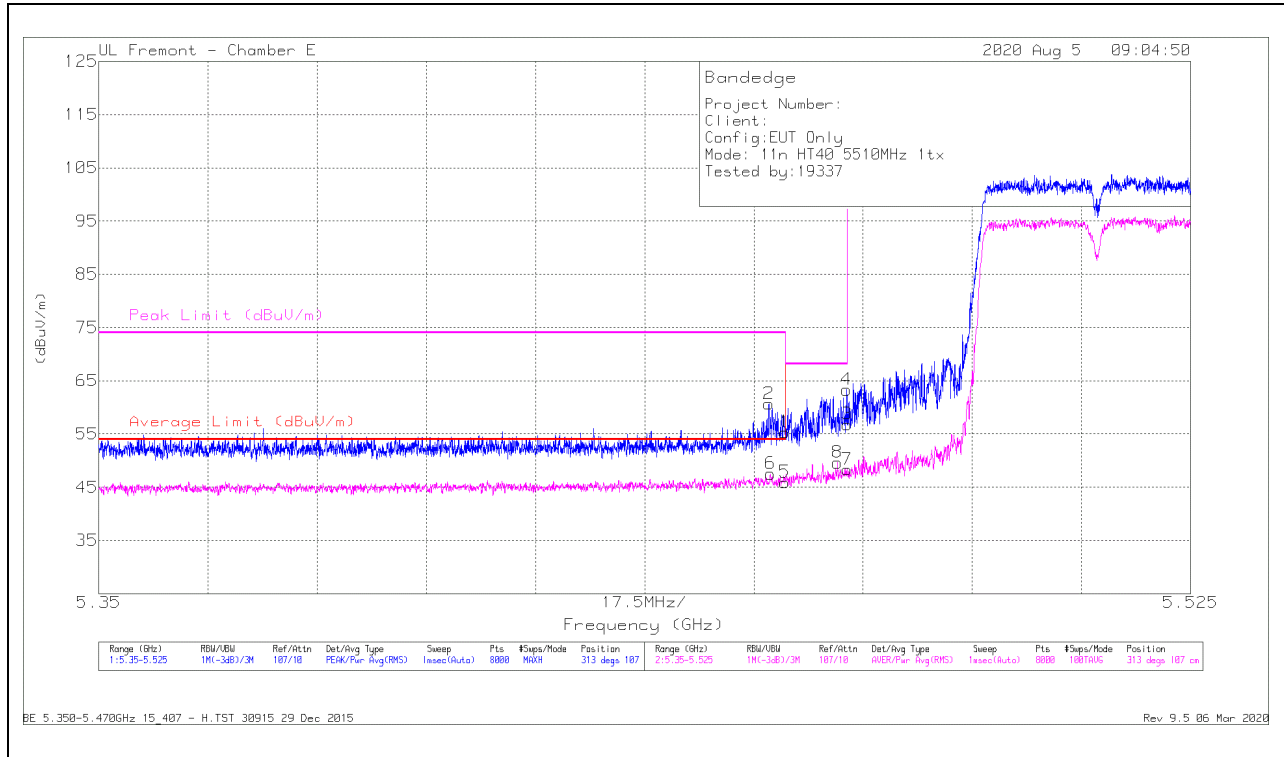

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1712 (dBm)	Amp/Cal/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.55	Pk	34.5	-21.7	0	55.35	-	-	74	-18.65	313	107	H
2	* 5.4574	47.78	Pk	34.6	-21.7	0	60.68	-	-	74	-13.32	313	107	H
5	* 5.45998	32.51	RMS	34.5	-21.7	.65	45.96	54	-8.04	-	-	313	107	H
6	* 5.45764	34.02	RMS	34.6	-21.7	.65	47.57	54	-6.43	-	-	313	107	H
8	5.46938	36.21	RMS	34.5	-21.7	.65	49.96	-	-	-	-	313	107	H
4	5.46987	50.42	Pk	34.6	-21.7	0	63.32	-	-	68.2	-4.88	313	107	H
3	5.46998	43.92	Pk	34.6	-21.7	0	56.82	-	-	68.2	-11.38	313	107	H
7	5.46998	34.78	RMS	34.6	-21.7	.65	48.33	-	-	-	-	313	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

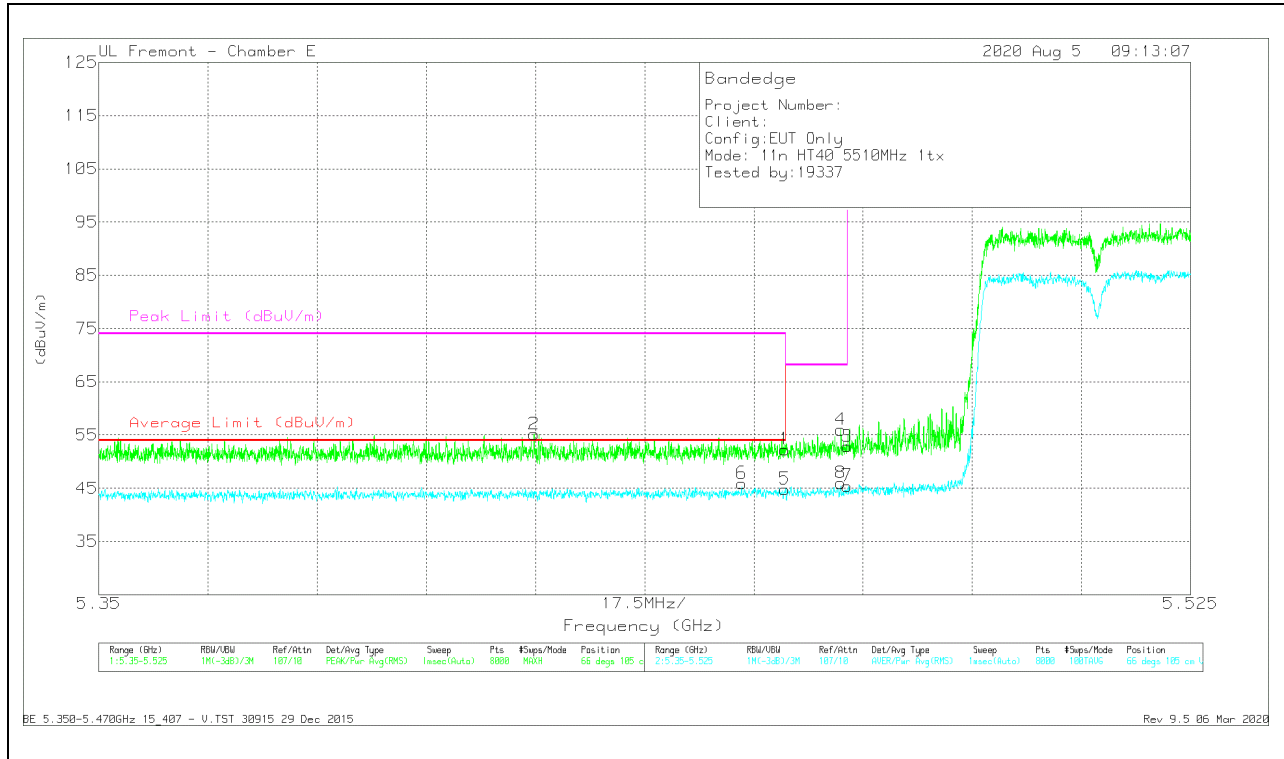


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.45998	39.49	PK	34.5	-21.7	0	52.29	-	-	74	-21.71	66	105	V
2	*5.41977	42.45	PK	34.5	-21.8	0	55.15	-	-	74	-18.85	66	105	V
5	*5.45998	31.41	RMS	34.5	-21.7	.65	44.86	54	-9.14	-	-	66	105	V
6	*5.45305	32.48	RMS	34.5	-21.7	.65	45.93	54	-8.07	-	-	66	105	V
8	5.46891	32.55	RMS	34.5	-21.7	.65	46.00	-	-	-	-	66	105	V
4	5.46893	43.18	PK	34.5	-21.7	0	55.98	-	-	68.2	-12.22	66	105	V
3	5.46998	39.93	PK	34.6	-21.7	0	52.83	-	-	68.2	-15.37	66	105	V
7	5.46998	31.91	RMS	34.6	-21.7	.65	45.46	-	-	-	-	66	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

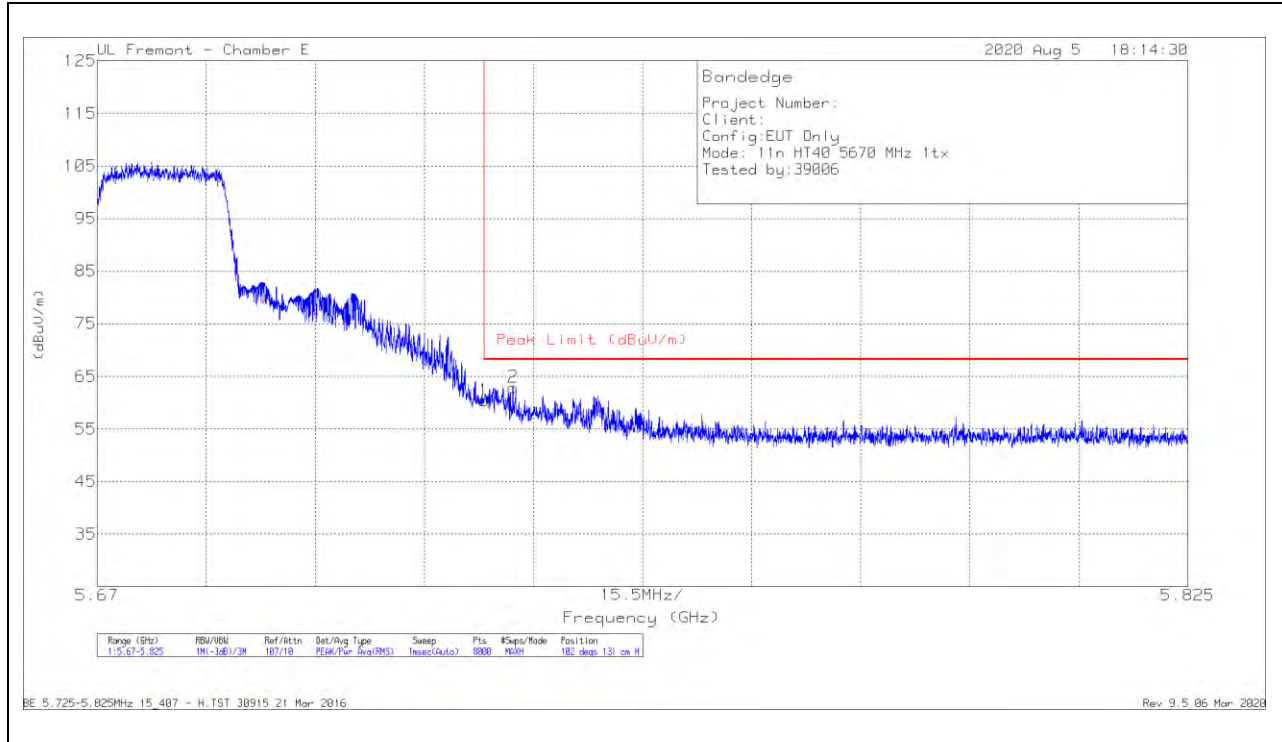

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.96	Pk	34.7	-21.2	0	60.46	68.2	-7.74	102	131	H
2	5.72908	49.36	Pk	34.8	-21.2	0	62.96	68.2	-5.24	102	131	H

Pk - Peak detector

VERTICAL RESULT

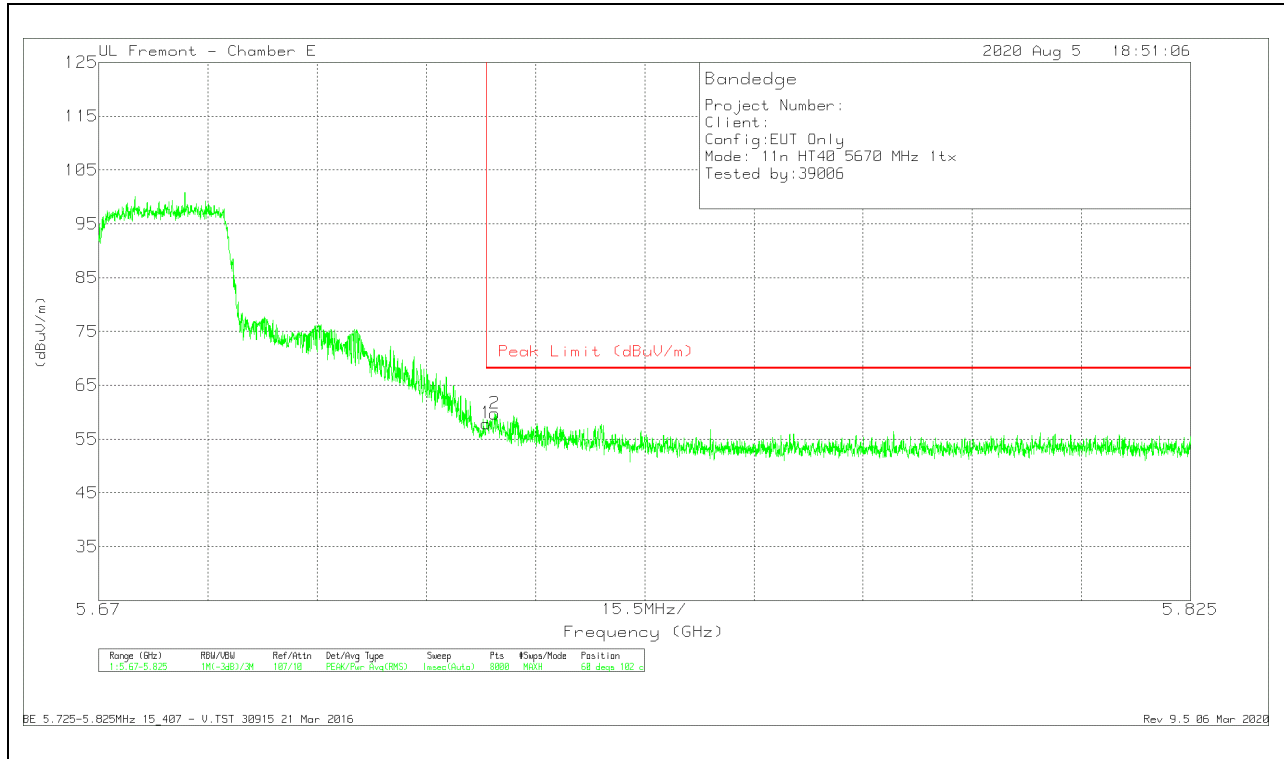


Marker	Frequency (GHz)	Meter Reading (dBμV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	DC Corr (dB)	Corrected Reading (dBμV/m)	Peak Limit (dBμV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	44.42	Pk	34.7	-21.2	0	57.92	68.2	-10.28	60	102	V
2	5.72623	46.26	Pk	34.7	-21.2	0	59.76	68.2	-8.44	60	102	V

Pk - Peak detector

1TX ANTENNA 5

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

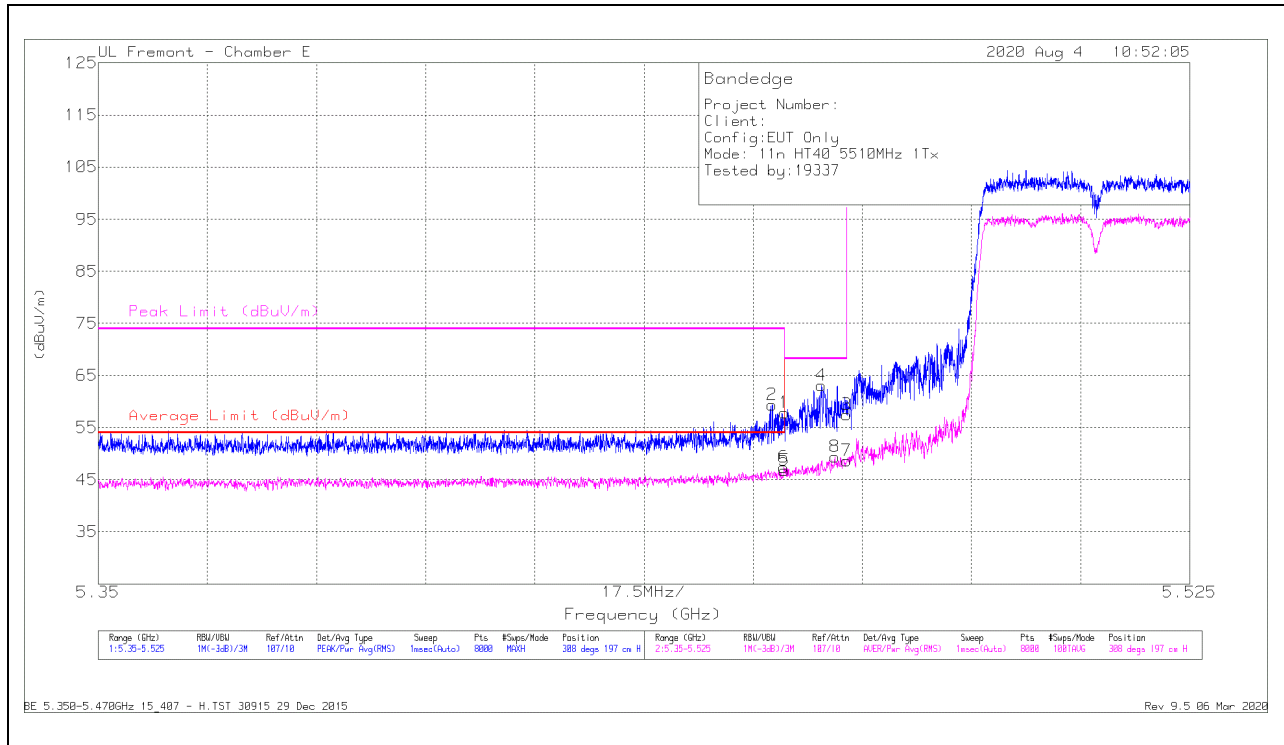

Marker	Frequency (GHz)	Master Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	45.09	PK	34.5	-21.7	0	57.99	-	-	74	-16.11	308	197	H
2	* 5.45808	46.44	PK	34.6	-21.7	0	59.34	-	-	74	-14.66	308	197	H
5	* 5.45998	33.4	RMS	34.5	-21.7	.65	46.85	54	-7.15	-	-	308	197	H
6	* 5.45994	33.96	RMS	34.5	-21.7	.65	47.41	54	-6.59	-	-	308	197	H
4	* 5.48598	50.3	PK	34.5	-21.7	0	63.1	-	-	68.2	-5.1	308	197	H
8	5.4681	35.97	RMS	34.5	-21.7	.65	49.42	-	-	-	-	308	197	H
3	5.46998	44.55	PK	34.6	-21.7	0	57.45	-	-	68.2	-10.75	308	197	H
7	5.46998	35.06	RMS	34.6	-21.7	.65	48.61	-	-	-	-	308	197	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

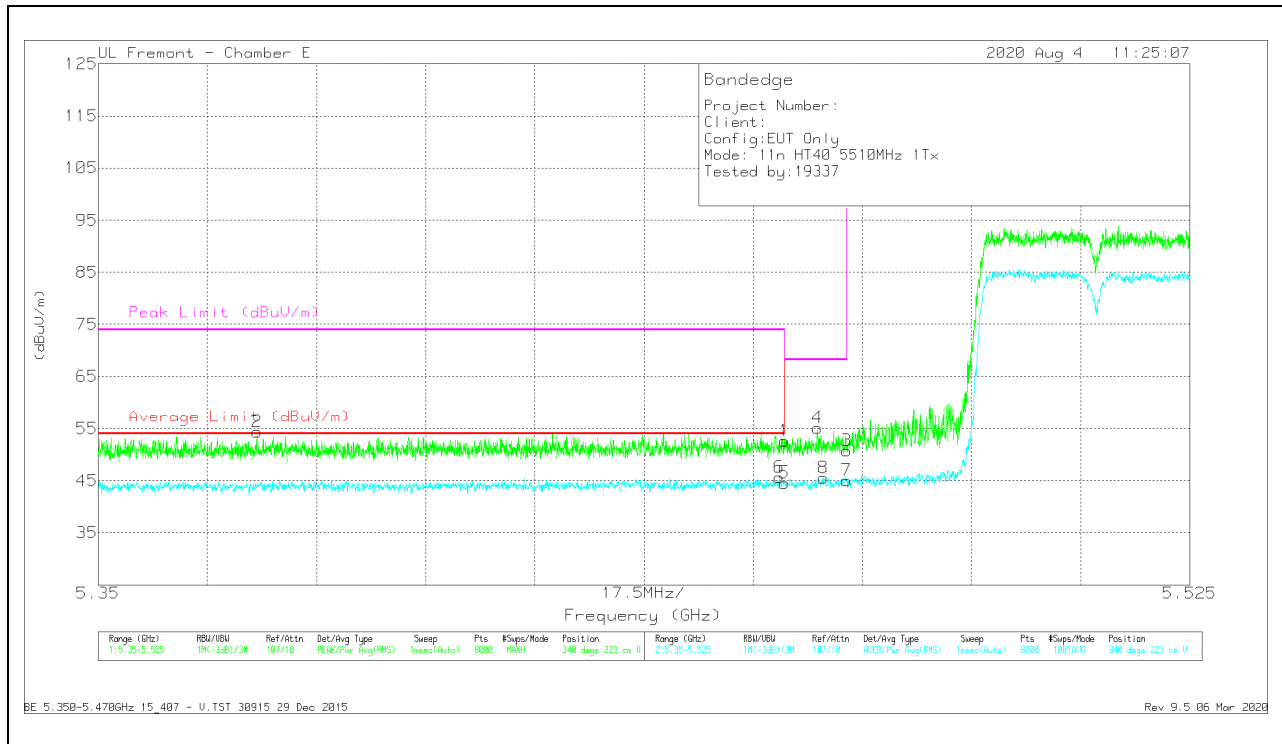


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.83	PK	34.5	-21.7	0	52.63	-	-	74	-21.37	340	223	V
2	* 5.37544	41.72	PK	34.4	-21.7	0	54.42	-	-	74	-19.58	340	223	V
5	* 5.45998	31.16	RMS	34.5	-21.7	.65	44.61	54	-9.39	-	-	340	223	V
6	* 5.45915	32.13	RMS	34.6	-21.7	.65	45.68	54	-8.32	-	-	340	223	V
4	5.4653	42.35	PK	34.5	-21.7	0	55.15	-	-	68.2	-13.05	340	223	V
8	5.46619	32.15	RMS	34.5	-21.7	.65	45.60	-	-	-	-	340	223	V
3	5.46998	37.87	PK	34.6	-21.7	0	50.77	-	-	68.2	-17.43	340	223	V
7	5.46998	31.48	RMS	34.6	-21.7	.65	45.03	-	-	-	-	340	223	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

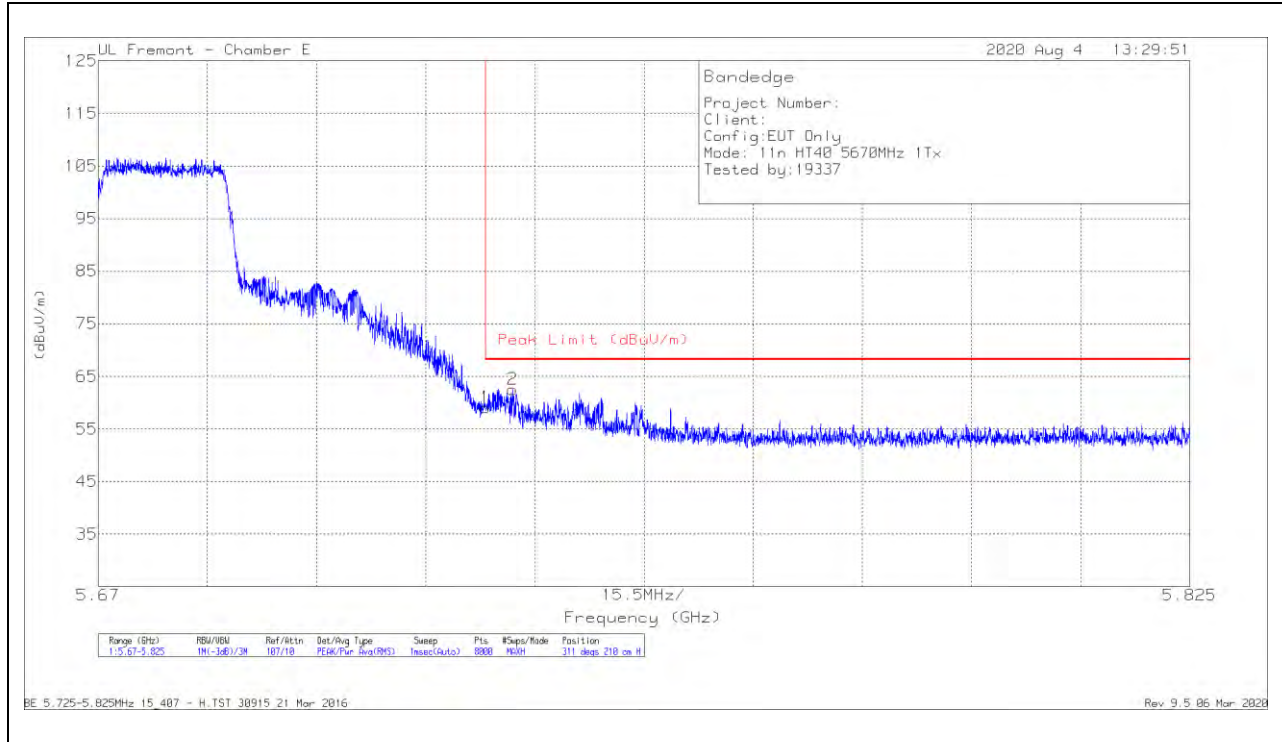

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.6	Pk	34.7	-21.2	0	59.1	68.2	-9.1	311	210	H
2	5.72883	49.08	Pk	34.7	-21.2	0	62.58	68.2	-5.62	311	210	H

Pk - Peak detector

VERTICAL RESULT

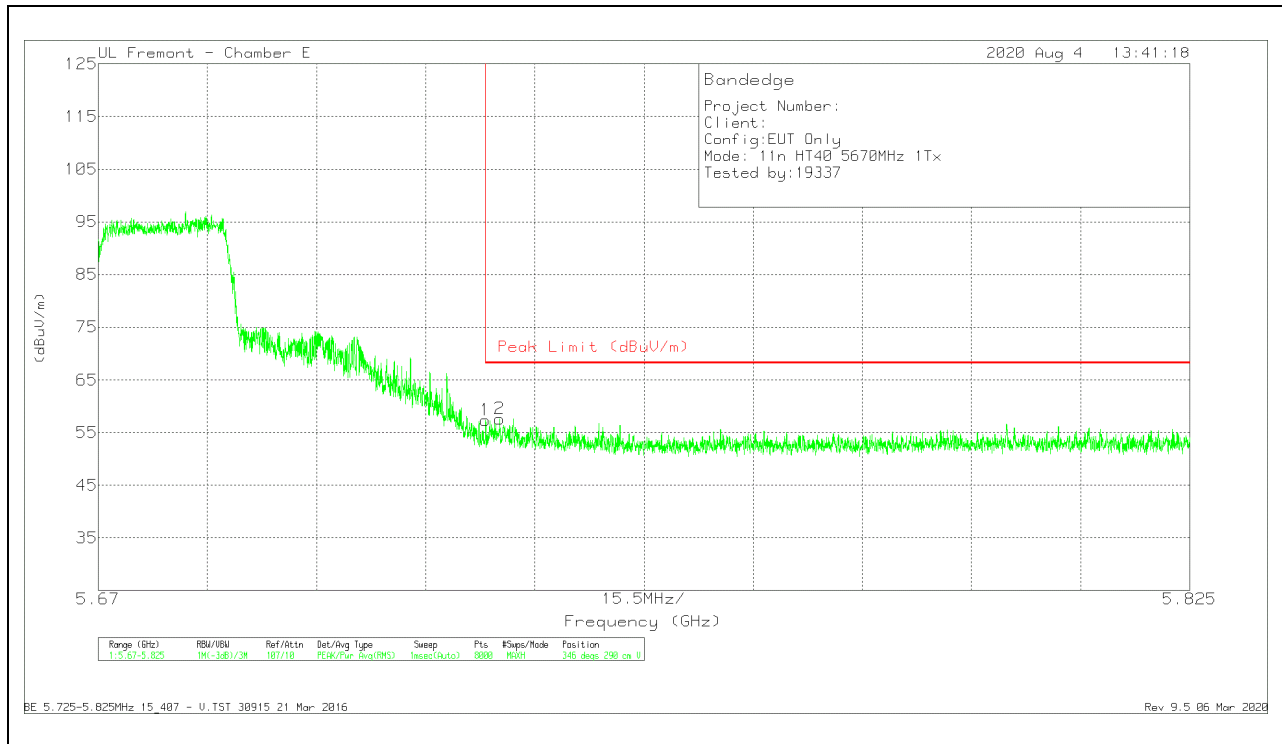


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	43.85	PK	34.7	-21.2	0	57.35	68.2	-10.85	346	290	V
2	5.72701	44.15	PK	34.7	-21.2	0	57.65	68.2	-10.55	346	290	V

Pk - Peak detector

2TX ANTENNA 6 + ANTENNA 5 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

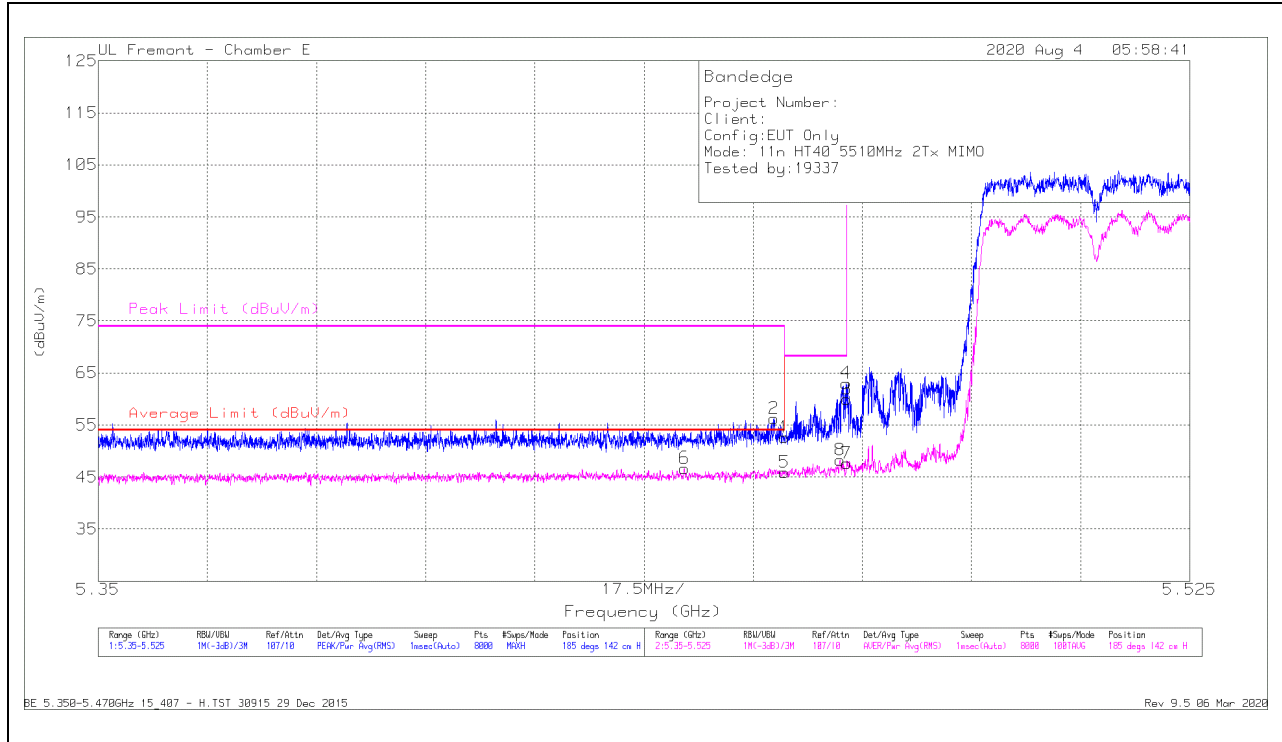

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T112 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.78	PK	34.5	-21.7	0	52.58	-	-	74	-21.42	185	142	H
2	* 5.4583	43.32	PK	34.6	-21.7	0	56.22	-	-	74	-17.78	185	142	H
5	* 5.45998	32.16	RMS	34.5	-21.7	.88	45.84	54	-8.16	-	-	185	142	H
6	* 5.44394	33.02	RMS	34.5	-21.7	.88	46.7	54	-7.3	-	-	185	142	H
8	5.46991	34.33	RMS	34.5	-21.7	.88	48.21	-	-	-	-	185	142	H
4	5.46991	50.13	PK	34.6	-21.7	0	63.03	-	-	68.2	-5.17	185	142	H
3	5.46998	47.03	PK	34.6	-21.7	0	59.93	-	-	68.2	-8.27	185	142	H
7	5.46998	33.85	RMS	34.6	-21.7	.88	47.63	-	-	-	-	185	142	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

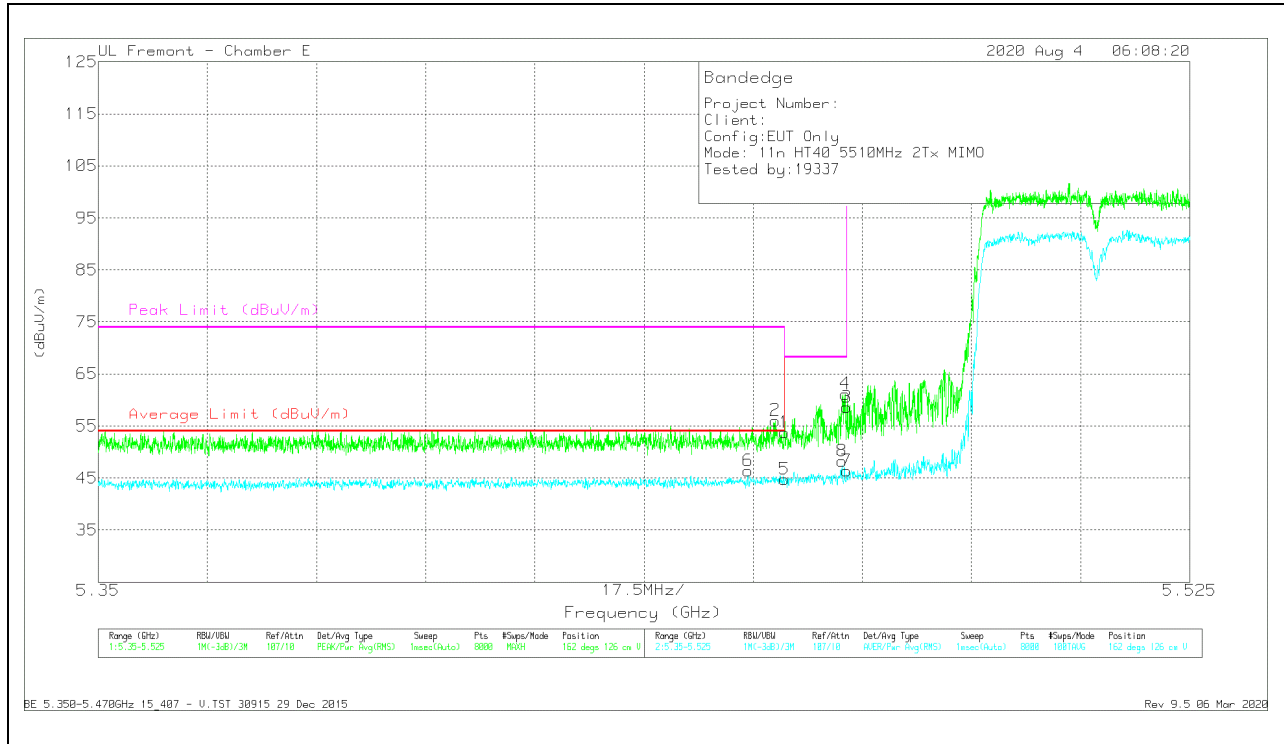


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
1	* 5.45998	40.91	PK	34.5	-21.7	0	53.71	-	-	74	-20.29	162	126	V
2	* 5.45854	43.15	PK	34.6	-21.7	0	56.05	-	-	74	-17.95	162	126	V
5	* 5.45998	31.12	RMS	34.5	-21.7	.88	44.8	54	-9.2	-	-	162	126	V
6	* 5.45414	32.7	RMS	34.5	-21.7	.88	46.38	54	-7.62	-	-	162	126	V
8	5.46924	34.45	RMS	34.6	-21.7	.88	48.23	-	-	-	-	162	126	V
4	5.46976	48.26	PK	34.6	-21.7	0	61.16	-	-	68.2	-7.04	162	126	V
3	5.46998	45.66	PK	34.6	-21.7	0	58.56	-	-	68.2	-9.64	162	126	V
7	5.46998	32.58	RMS	34.6	-21.7	.88	46.36	-	-	-	-	162	126	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

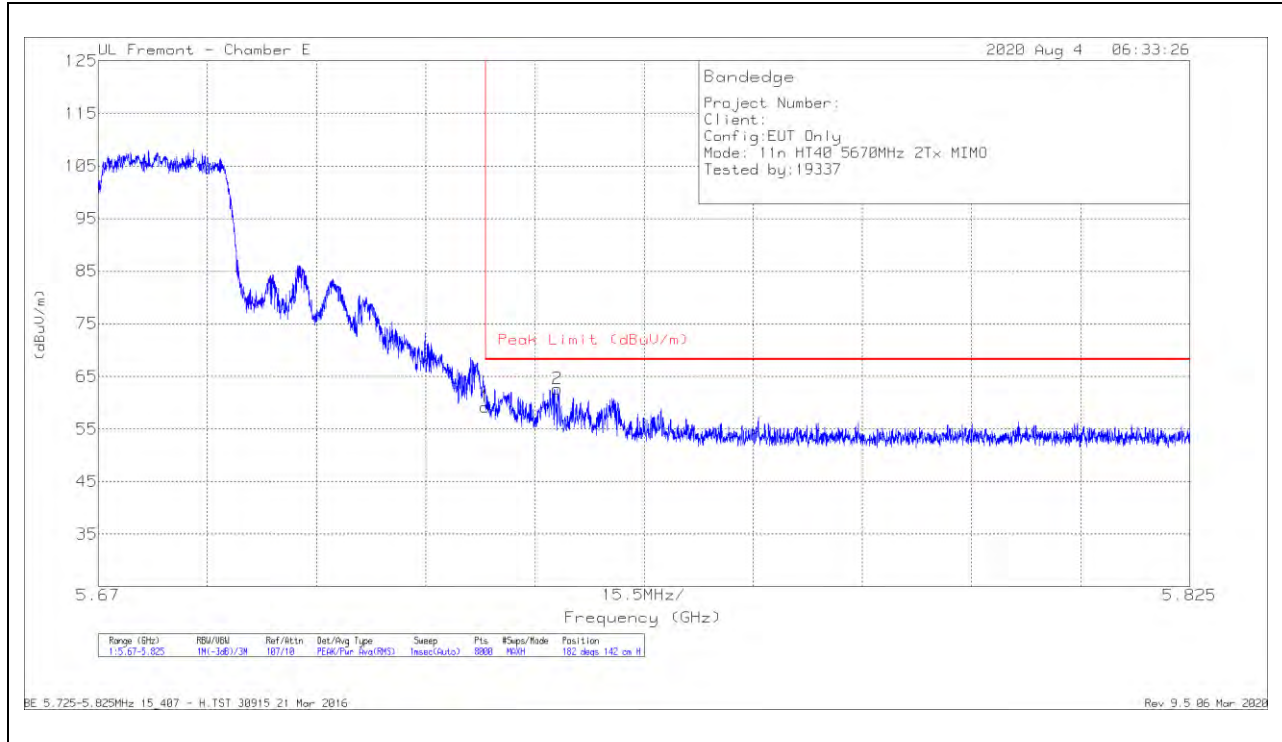

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Parad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.76	Pk	34.7	-21.2	0	59.26	68.2	-8.94	182	142	H
2	5.73522	49.02	Pk	34.8	-21.2	0	62.62	68.2	-5.58	182	142	H

Pk - Peak detector

VERTICAL RESULT

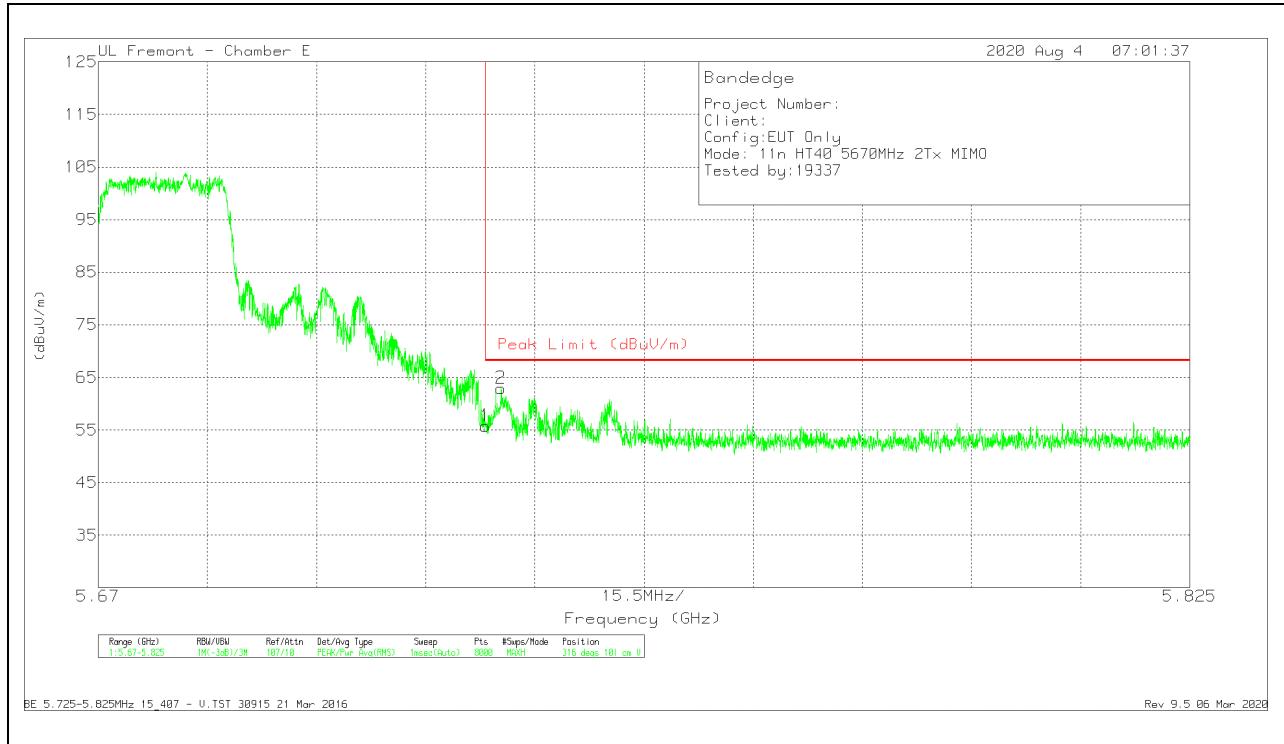


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	42.31	Pk	34.7	-21.2	55.81	68.2	-12.39	316	101	V
2	5.72722	49.46	Pk	34.7	-21.2	62.96	68.2	-5.24	316	101	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

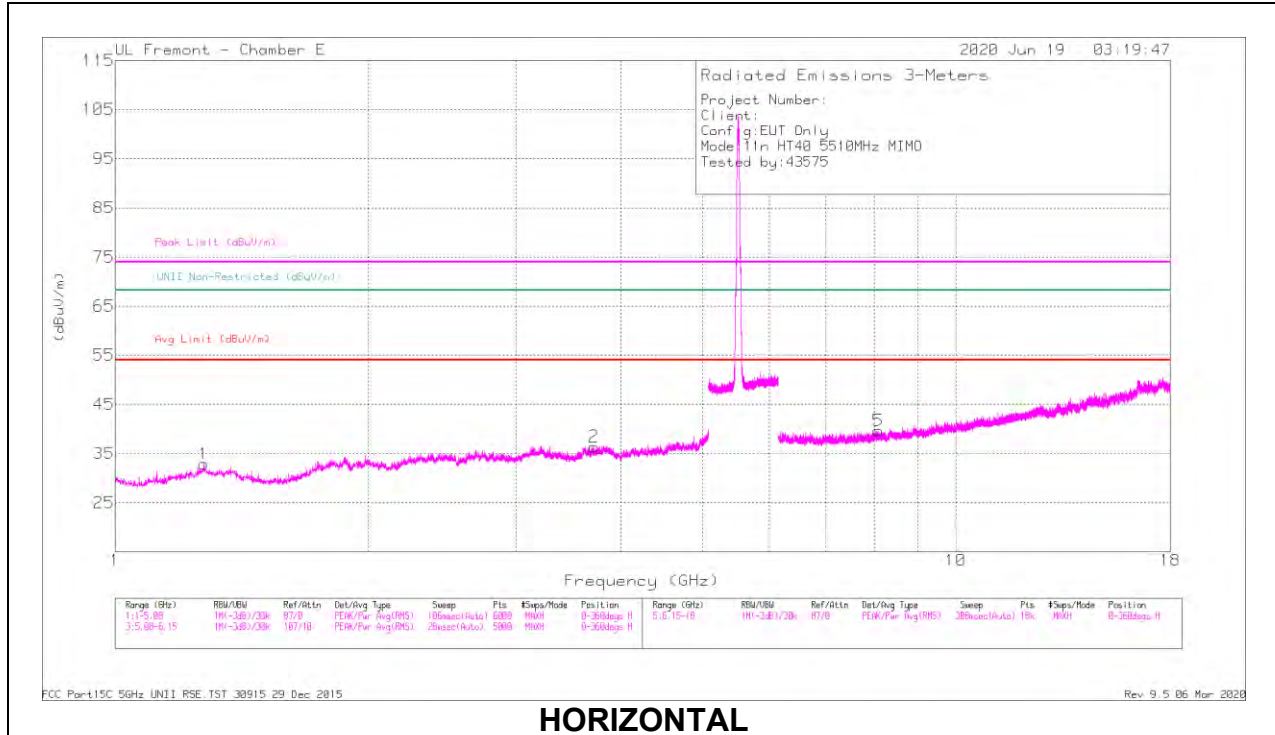

HORIZONTAL

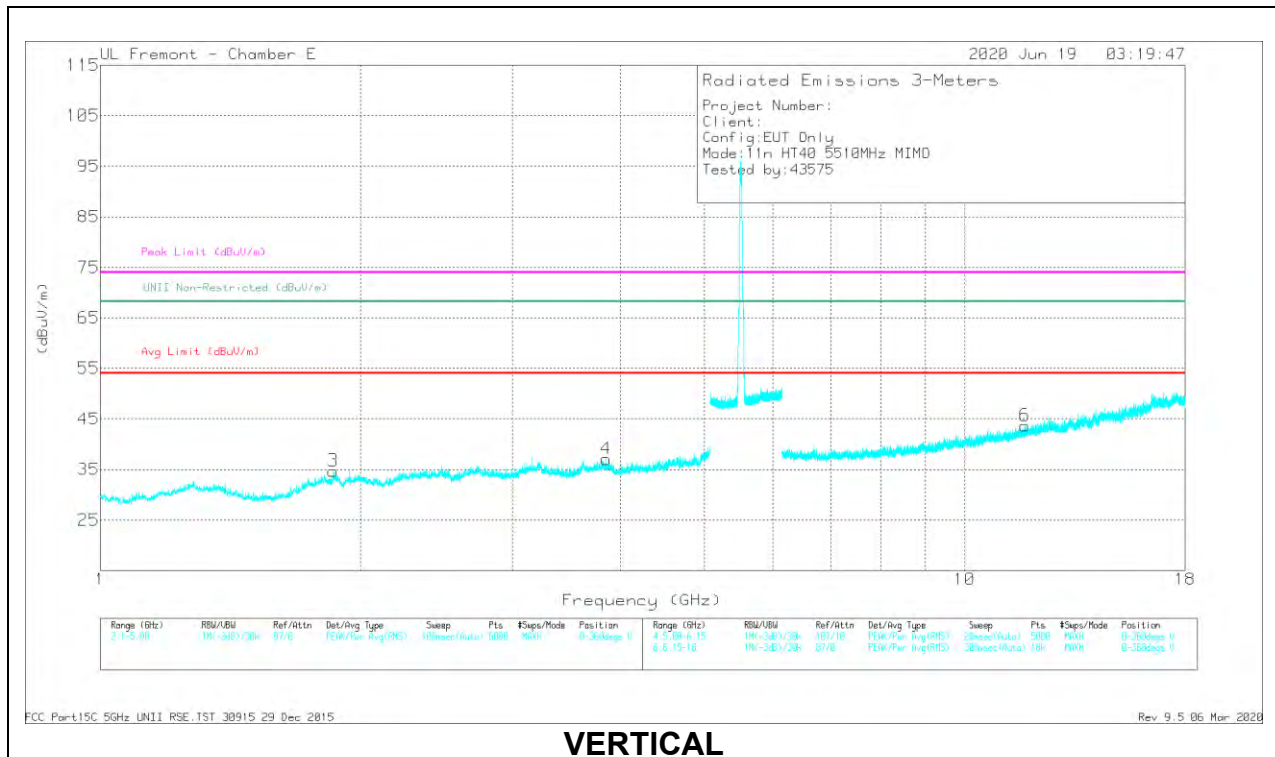

VERTICAL

RADIATED EMISSIONS


Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.27387	44.18	PK-U	29.7	-34.8		39.08	-	-	74	-34.92	-	-	0	200	H
	* 1.27307	32.84	ADR	29.6	-34.8	.17	27.81	54	-26.19	-	-	-	-	0	200	H
2	* 3.711	43.76	PK-U	33.2	-33.6		43.36	-	-	74	-30.64	-	-	0	101	H
	* 3.71218	31.74	ADR	33.2	-33.6	.17	31.51	54	-22.49	-	-	-	-	0	101	H
4	* 3.84526	42.45	PK-U	33.6	-33		43.05	-	-	74	-30.95	-	-	0	101	V
	* 3.84683	31.09	ADR	33.6	-33	.17	31.86	54	-22.14	-	-	-	-	0	101	V
5	* 8.09021	38.24	PK-U	35.9	-27.9		46.24	-	-	74	-27.76	-	-	0	101	H
	* 8.08897	27.23	ADR	35.9	-27.9	.17	35.40	54	-18.60	-	-	-	-	0	101	H
6	* 11.737	34.93	PK-U	38.3	-23.7		49.53	-	-	74	-24.47	-	-	0	101	V
	* 11.73444	24.27	ADR	38.3	-23.7	.17	39.04	54	-14.96	-	-	-	-	0	101	V
3	1.85951	44.74	PK-U	31	-35.2		40.54	-	-	-	-	68.2	-27.66	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

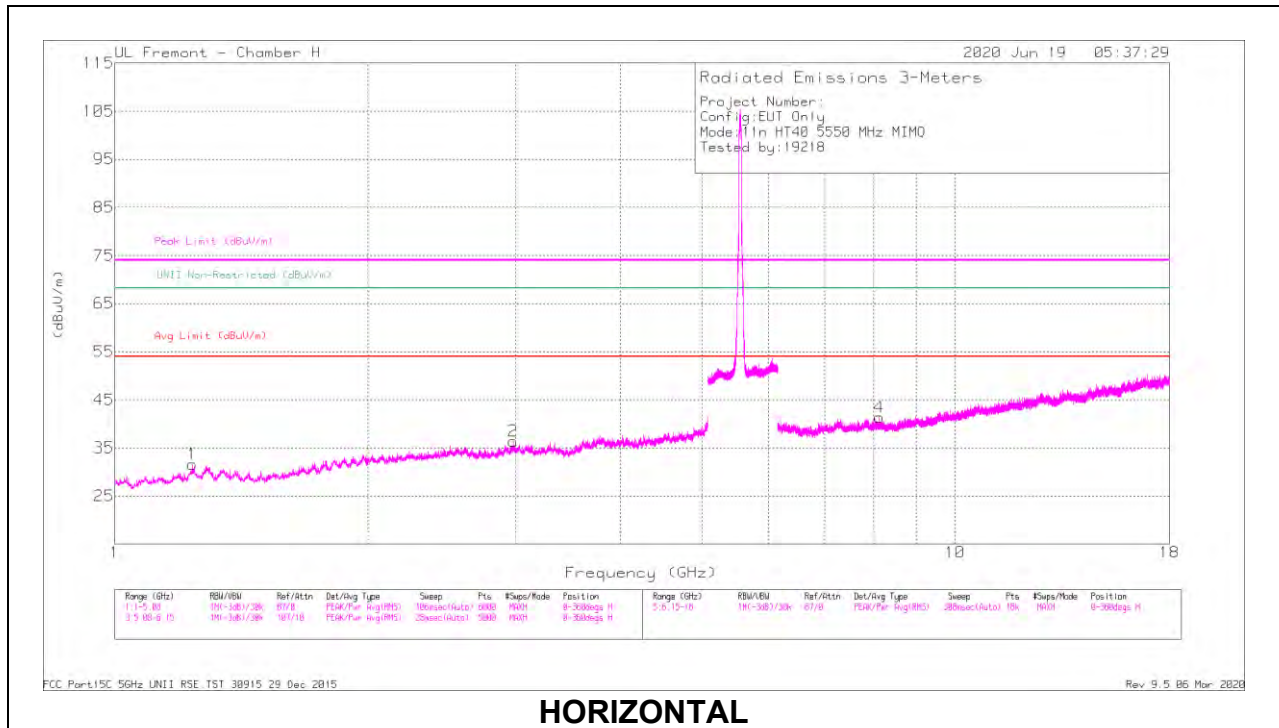

HORIZONTAL

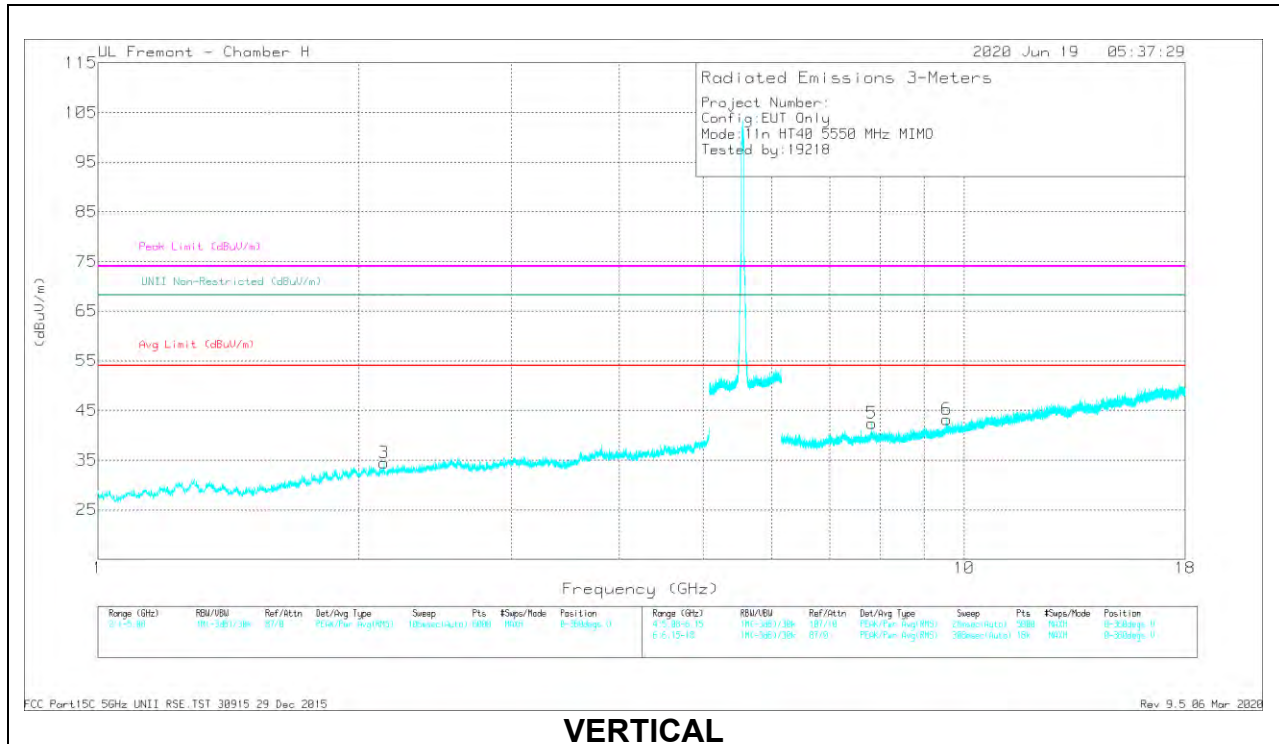


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarit y
1	* 1.23738	45.11	PK-U	28.8	-35.4		38.51	-	-	74	-35.49	-	-	306	167	H
	* 1.23625	33.16	ADR	28.8	-35.4	.17	26.73	54	-27.27	-	-	-	-	306	167	H
2	* 8.13061	38.17	PK-U	36.1	-26.9		47.37	-	-	74	-26.63	-	-	103	264	H
	* 8.1278	27.19	ADR	36	-26.9	.17	36.46	54	-17.54	-	-	-	-	103	264	H
3	2.13996	43.19	PK-U	31.5	-34		40.69	-	-	-	-	68.2	-27.51	207	227	V
4	2.98071	41.49	PK-U	32.8	-31.7		42.59	-	-	-	-	68.2	-25.61	258	192	H
5	7.82022	38.13	PK-U	36.2	-26.7		47.63	-	-	-	-	68.2	-20.57	51	312	V
6	9.5426	38.24	PK-U	36.8	-25.1		49.94	-	-	-	-	68.2	-18.26	55	330	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

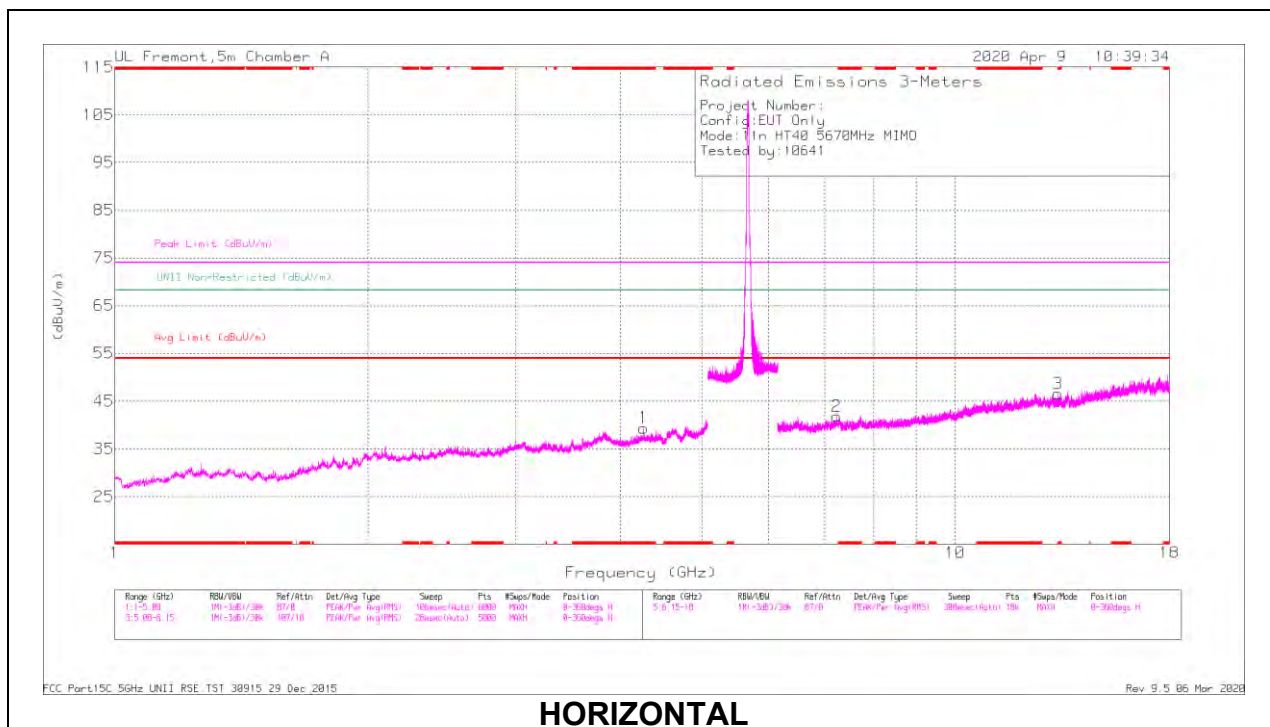

HORIZONTAL

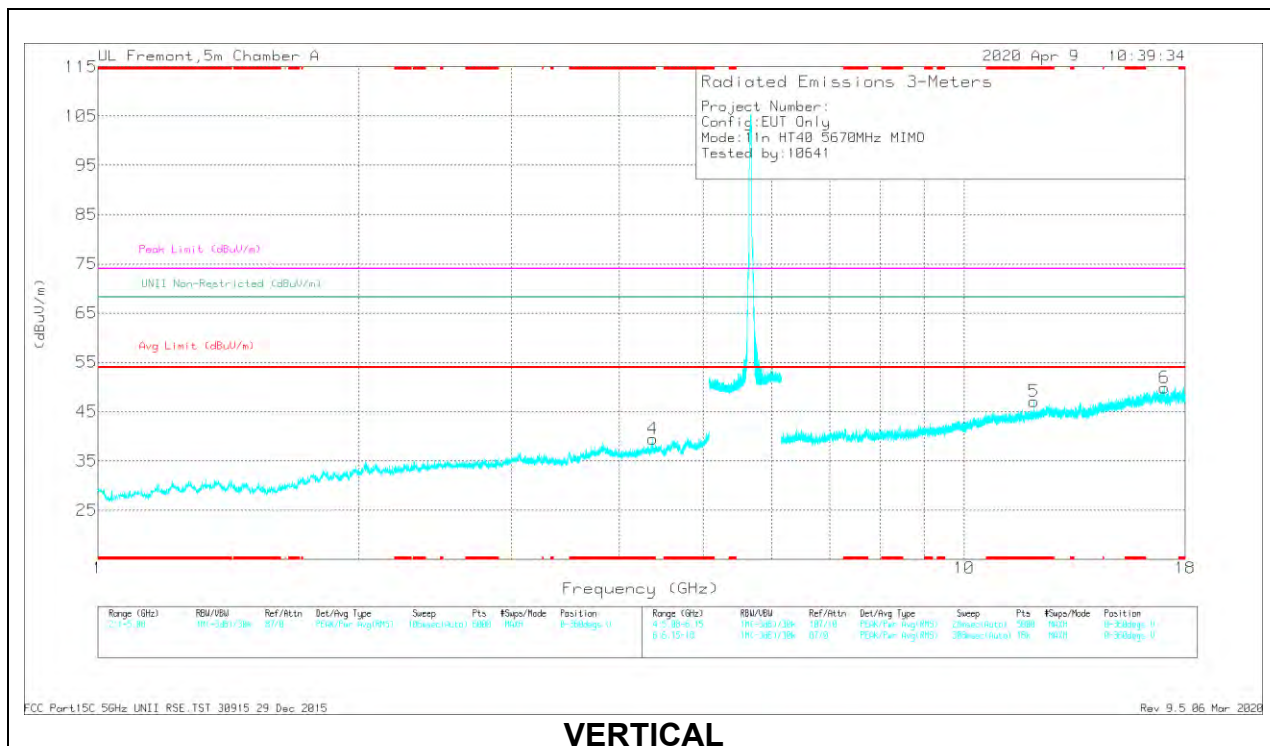

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.25993	40.15	PK-U	33.5	-28.3		45.35	-	-	74	-28.65	-	-	247	294	H
	* 4.26381	28.42	ADR	33.5	-28.3	.17	33.79	54	-20.21	-	-	-	-	247	294	H
4	* 4.36892	40.09	PK-U	33.6	-29.1		44.58	-	-	74	-29.42	-	-	134	355	V
	* 4.36782	29.2	ADR	33.7	-29.2	.17	33.87	54	-20.13	-	-	-	-	134	355	V
5	* 12.04836	33.24	PK-U	38.8	-19.7		52.34	-	-	74	-21.66	-	-	140	242	V
	* 12.04983	22.58	ADR	38.8	-19.7	.17	41.85	54	-12.15	-	-	-	-	140	242	V
2	7.23814	36.06	PK-U	35.9	-23.6		48.36	-	-	-	-	68.2	-19.84	193	296	H
3	13.1391	34.46	PK-U	39.1	-20.7		52.86	-	-	-	-	68.2	-15.34	236	274	H
6	17.0349	34.27	PK-U	41.1	-19.2		56.17	-	-	-	-	68.2	-12.03	135	301	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

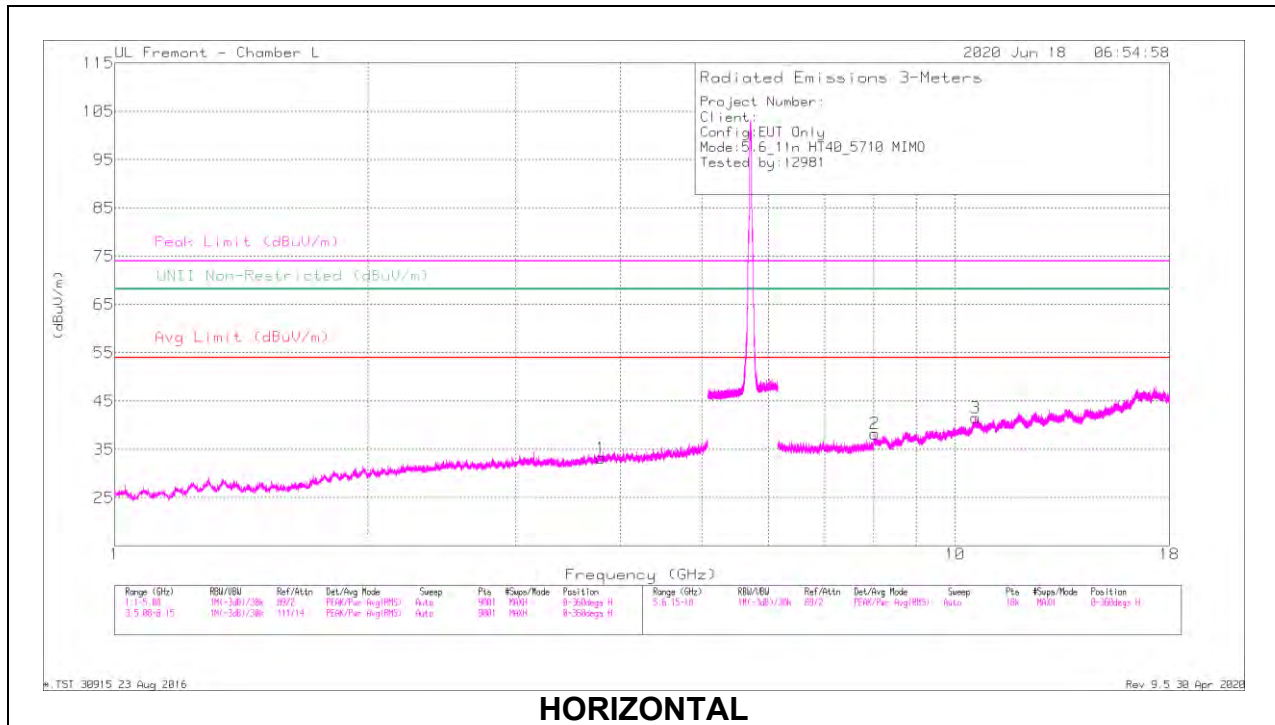

HORIZONTAL

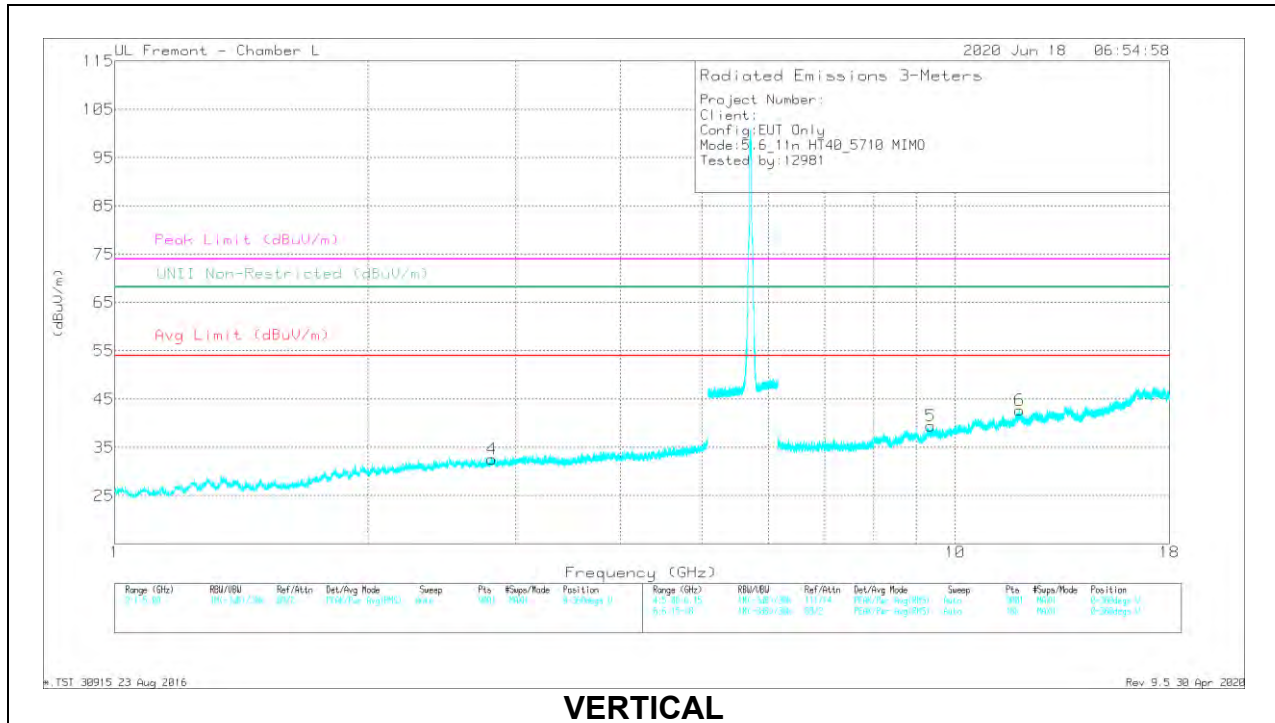

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.79155	38.15	PK-U	33.5	-29.1		42.55	-	-	74	-31.45	-	-	166	375	H
	* 3.79199	28.11	ADR	33.5	-29.1	.17	32.68	-	-21.32	-	-	-	-	166	375	H
4	* 2.81533	38.24	PK-U	32.3	-29.6		40.94	-	-	74	-33.06	-	-	351	380	V
	* 2.8122	28.27	ADR	32.3	-29.6	.17	31.17	-	-22.86	-	-	-	-	351	380	V
2	* 8.03064	31.11	PK-U	35.8	-22.1		44.81	-	-	74	-29.19	-	-	322	107	H
	* 8.02794	21.5	ADR	35.8	-22.1	.17	35.37	-	-18.63	-	-	-	-	322	107	H
3	10.58791	33.44	PK-U	37.9	-19.9		51.44	-	-	-	-	68.2	-16.76	31	359	H
5	* 9.36328	33.26	PK-U	36.5	-21.3		48.46	-	-	74	-25.54	-	-	342	357	V
	* 9.36064	22.37	ADR	36.5	-21.3	.17	37.74	-	-16.26	-	-	-	-	342	357	V
6	* 11.93434	31.56	PK-U	38.6	-19.5		50.66	-	-	74	-23.34	-	-	44	366	V
	* 11.93268	21.68	ADR	38.6	-19.5	.17	40.95	-	-13.05	-	-	-	-	44	366	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

6.1.15. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

1TX ANTENNA 6

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

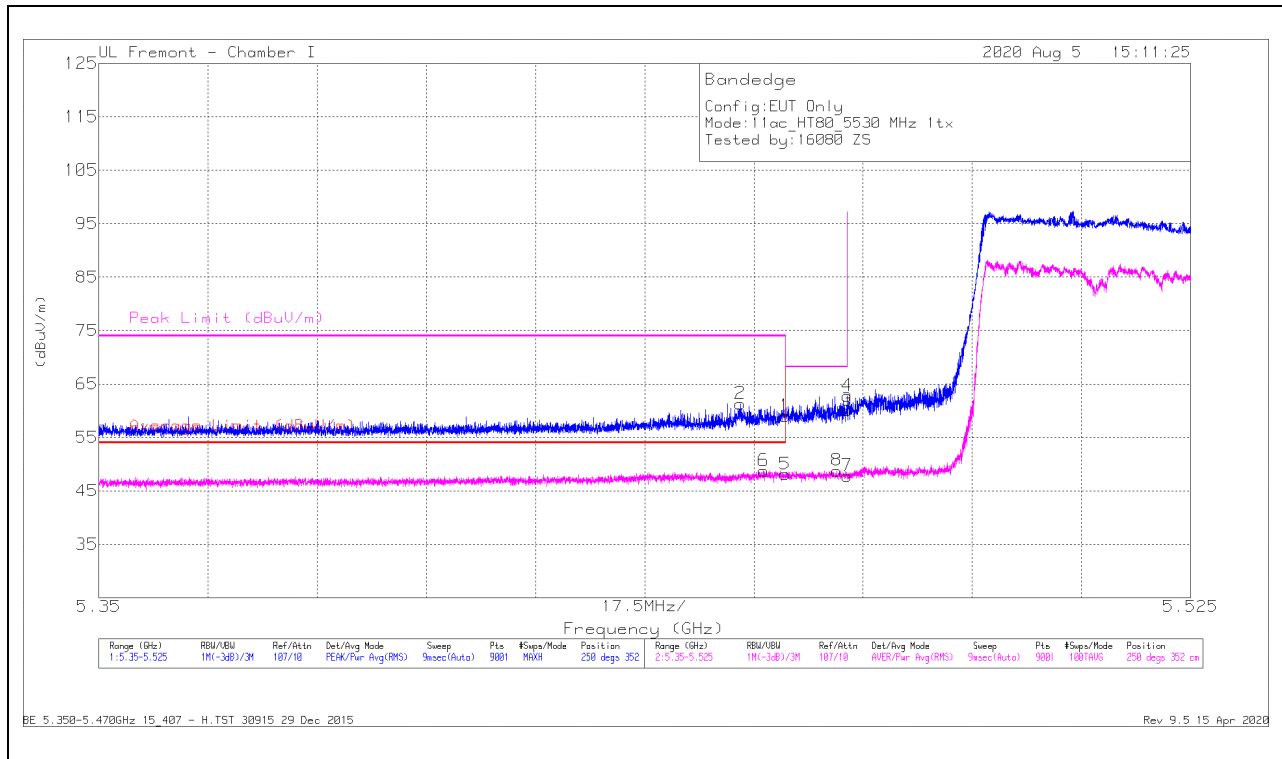

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF TRF2 (dBm)	Amp/Cal/Fit/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	37.95	Pk	34.9	-13.8	0	59.05	-	-	74	-14.95	250	352	H
2	* 5.45282	40.22	Pk	34.8	-13.7	0	61.32	-	-	74	-12.68	250	352	H
3	5.46999	38.99	Pk	34.9	-13.8	0	60.09	-	-	68.2	-8.11	250	352	H
4	5.46993	41.65	Pk	34.9	-13.8	0	62.75	-	-	68.2	-5.45	250	352	H
5	* 5.45999	25.75	RMS	34.9	-13.8	1.06	47.91	54	-8.09	-	-	250	352	H
6	* 5.45655	26.29	RMS	34.9	-13.7	1.06	48.55	54	-5.45	-	-	250	352	H
7	5.48999	25.45	RMS	34.9	-13.8	1.06	47.61	-	-	-	-	250	352	H
8	5.46826	26.45	RMS	34.9	-13.8	1.06	48.61	-	-	-	-	250	352	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

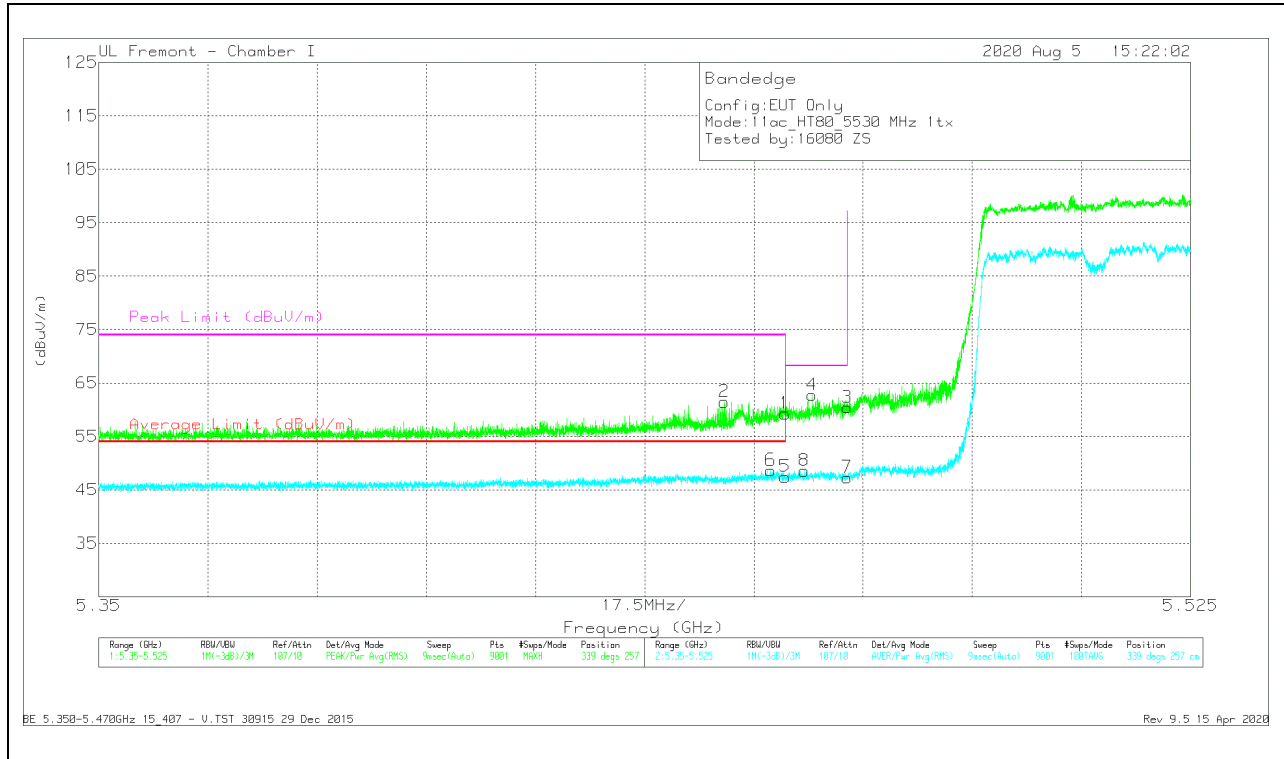


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1862 (dBm)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	38.18	PK	34.9	-13.8	0	59.28	-	-	74	-14.72	339	257	V
2	* 5.45025	40.37	PK	34.8	-13.7	0	61.47	-	-	74	-12.53	339	257	V
3	5.46999	39.31	PK	34.9	-13.8	0	60.41	-	-	68.2	-7.79	339	257	V
4	5.46433	41.62	PK	34.9	-13.8	0	62.72	-	-	68.2	-5.48	339	257	V
5	* 5.45999	25.11	RMS	34.9	-13.8	1.06	47.27	54	-6.73	-	-	339	257	V
6	* 5.4577	26.28	RMS	34.9	-13.8	1.06	48.44	54	-5.56	-	-	339	257	V
7	5.46999	24.93	RMS	34.9	-13.8	1.06	47.09	-	-	-	-	339	257	V
8	5.46309	26.32	RMS	34.8	-13.8	1.06	48.38	-	-	-	-	339	257	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

1TX ANTENNA 5

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

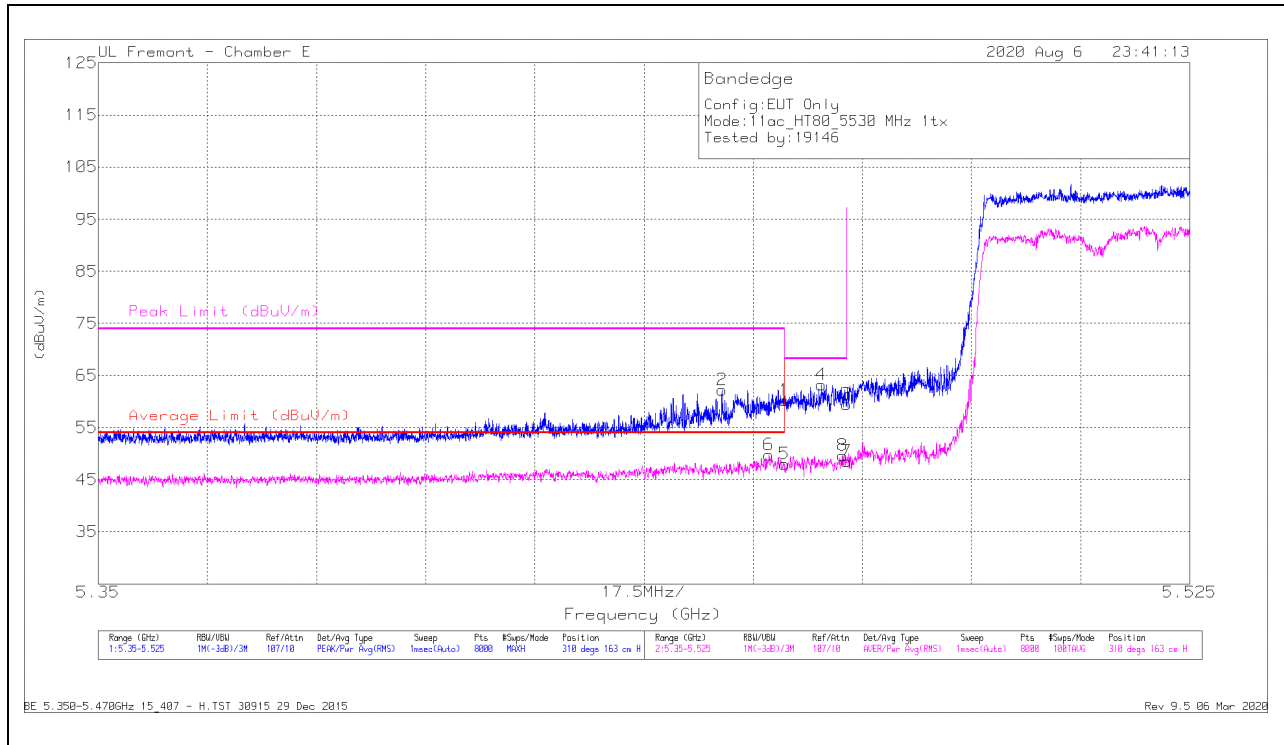

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.45	49.43	Pk	34.5	-21.7	0	62.23	-	-	74	-11.77	310	163	H
6	* 5.45753	35.56	RMS	34.6	-21.7	1.06	49.52	54	-4.48	-	-	310	163	H
1	* 5.45998	47.43	Pk	34.5	-21.7	0	60.23	-	-	74	-13.77	310	163	H
5	* 5.45998	33.98	RMS	34.5	-21.7	1.06	47.85	54	-6.15	-	-	310	163	H
4	5.46591	50.47	Pk	34.5	-21.7	0	63.27	-	-	68.2	-4.93	310	163	H
8	5.46932	35.46	RMS	34.6	-21.7	1.06	49.42	-	-	-	-	310	163	H
3	5.46998	46.59	Pk	34.6	-21.7	0	59.49	-	-	68.2	-8.71	310	163	H
7	5.46998	34.35	RMS	34.6	-21.7	1.06	48.31	-	-	-	-	310	163	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

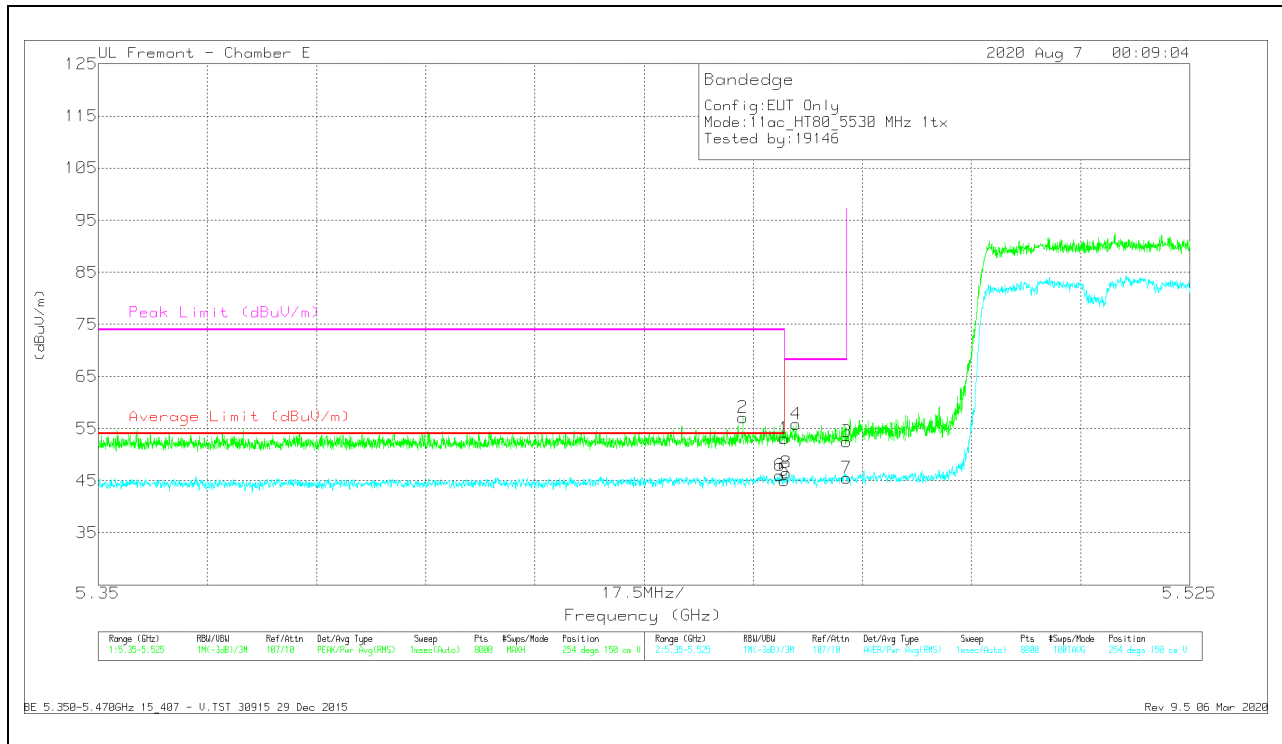


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.32	PK	34.5	-21.7	0	53.12	-	-	74	-20.88	254	150	V
2	* 5.45335	44.29	PK	34.5	-21.7	0	57.06	-	-	74	-16.81	254	150	V
5	* 5.45998	31.03	RMS	34.5	-21.7	1.06	44.89	54	-9.11	-	-	254	150	V
6	* 5.45926	31.9	RMS	34.6	-21.7	1.06	45.86	54	-8.14	-	-	254	150	V
8	5.46029	32.43	RMS	34.5	-21.7	1.06	46.29	-	-	-	-	254	150	V
4	5.46186	43.1	PK	34.5	-21.7	0	55.9	-	-	68.2	-12.3	254	150	V
3	5.46998	39.59	PK	34.6	-21.7	0	52.49	-	-	68.2	-15.71	254	150	V
7	5.46998	31.38	RMS	34.6	-21.7	1.06	45.34	-	-	-	-	254	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

2TX ANTENNA 6 + ANTENNA 5 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

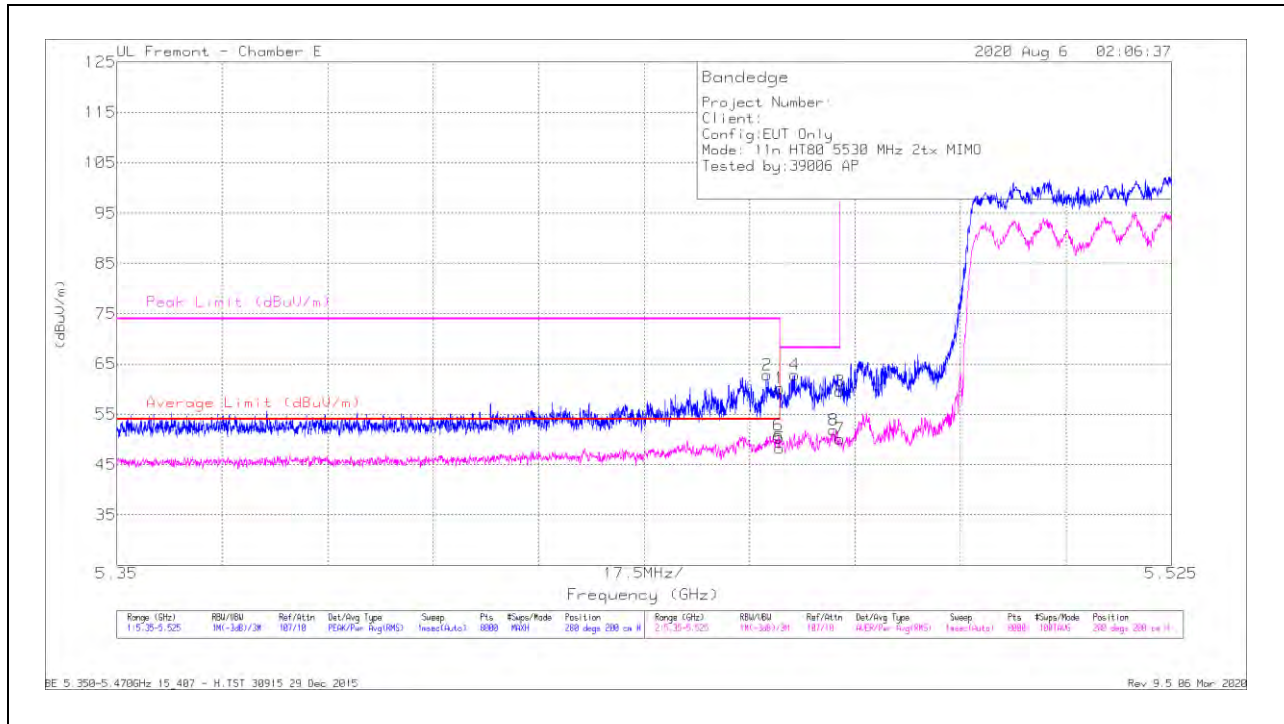

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	47.38	PK	34.5	-21.7	0	60.18	-	-	74	-13.82	280	200	H
2	* 5.45792	49.99	PK	34.6	-21.7	0	62.89	-	-	74	-11.11	280	200	H
5	* 5.45998	34.2	RMS	34.5	-21.7	1.25	48.25	54	-5.75	-	-	280	200	H
6	* 5.45983	36.82	RMS	34.5	-21.7	1.25	60.87	54	-3.13	-	-	280	200	H
4	5.46245	50	PK	34.5	-21.7	0	62.8	-	-	68.2	-5.4	280	200	H
8	5.46893	37.87	RMS	34.5	-21.7	1.25	51.92	-	-	-	-	280	200	H
3	5.46998	46.74	PK	34.6	-21.7	0	59.64	-	-	68.2	-8.56	280	200	H
7	5.46998	35.98	RMS	34.6	-21.7	1.25	50.13	-	-	-	-	280	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

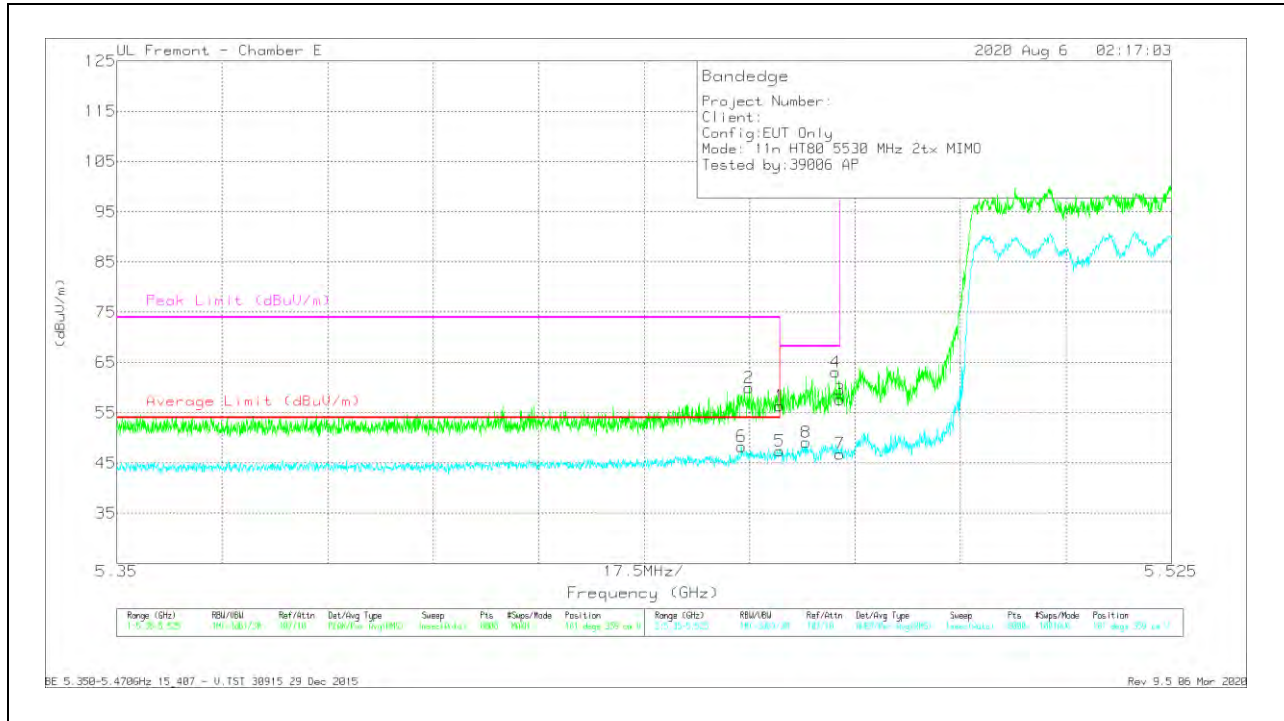


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T112 (dBm)	Ampl/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	43.92	PK	34.5	-21.7	0	56.42	-	-	74	-17.58	181	359	V
2	* 5.45495	47.13	PK	34.6	-21.7	0	60.03	-	-	74	-13.97	181	359	V
5	* 5.45998	33.3	RMS	34.5	-21.7	1.25	47.35	54	-6.65	-	-	181	359	V
6	* 5.45361	34.27	RMS	34.5	-21.7	1.25	48.32	54	-5.68	-	-	181	359	V
8	* 5.4644	35.1	RMS	34.5	-21.7	1.25	49.15	-	-	-	-	181	359	V
4	5.46926	50.16	PK	34.6	-21.7	0	63.06	-	-	68.2	-5.14	181	359	V
3	5.46998	44.73	PK	34.6	-21.7	0	57.63	-	-	68.2	-10.57	181	359	V
7	5.46998	32.68	RMS	34.6	-21.7	1.25	46.83	-	-	-	-	181	359	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

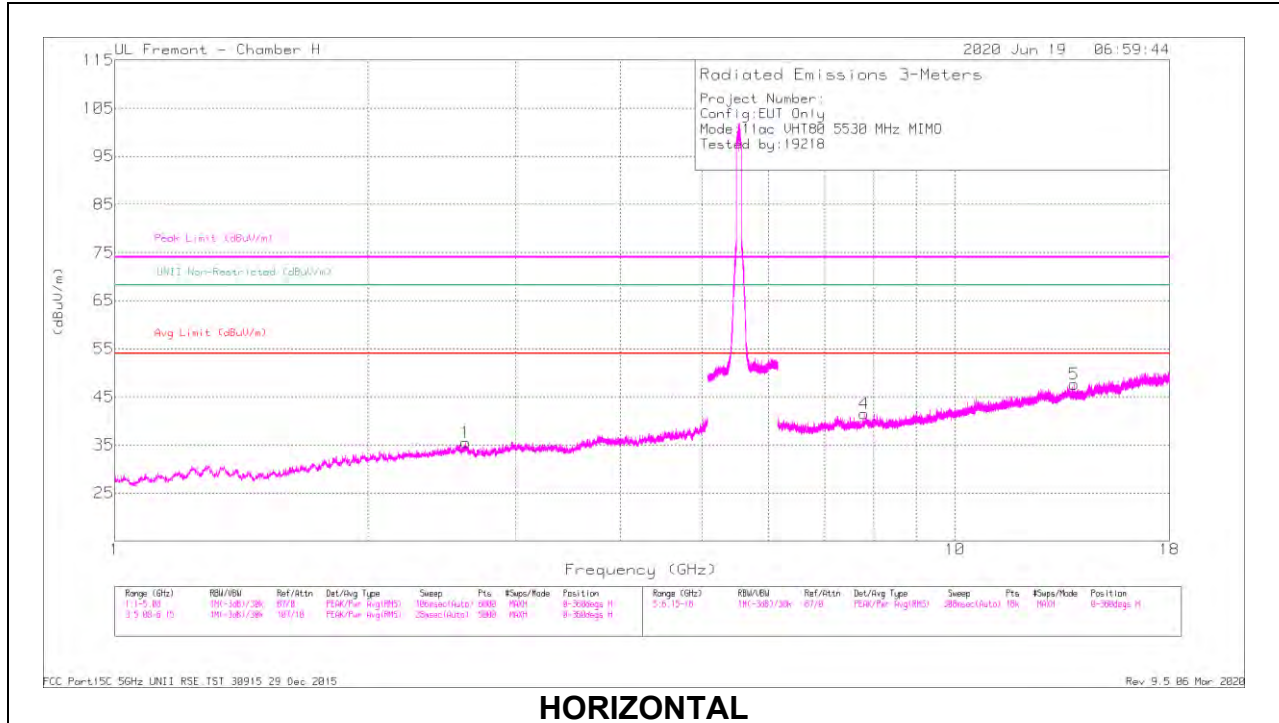

HORIZONTAL

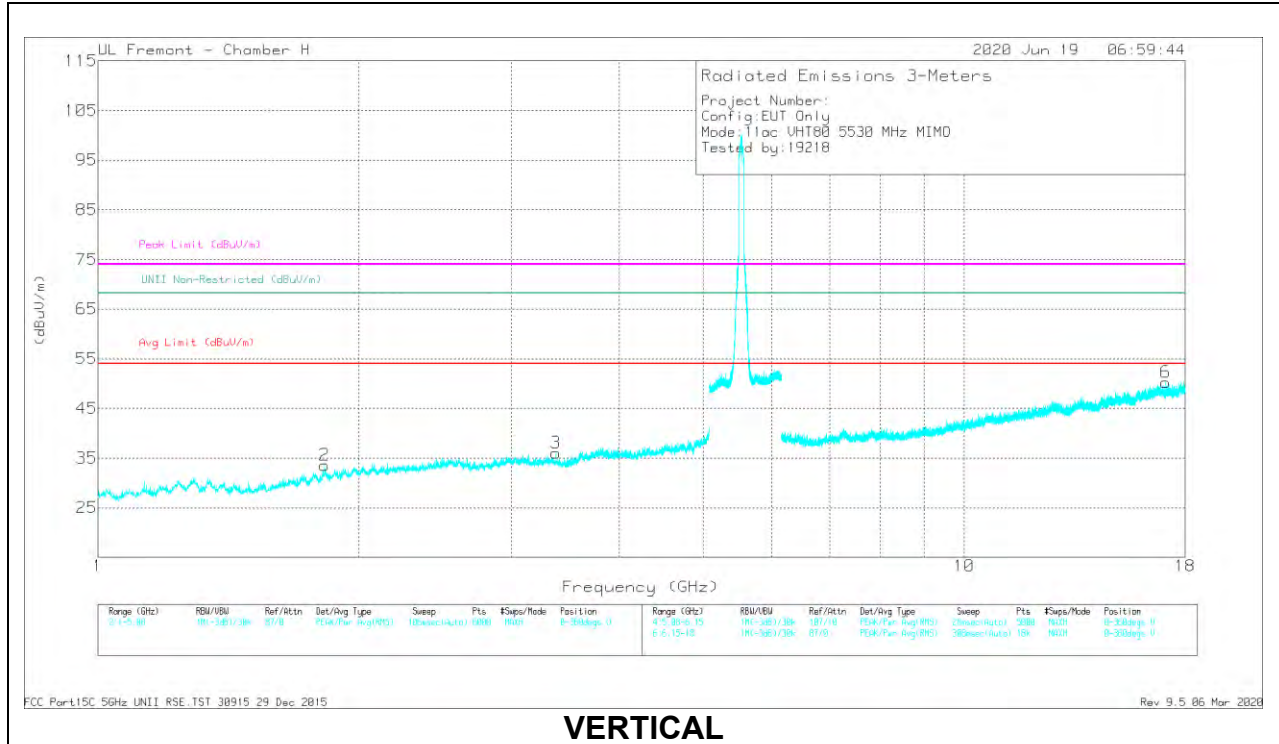


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.82981	43.58	PK-U	30.8	-34.5	39.88	68.2	-28.32	289	174	V
1	2.61782	42.77	PK-U	32.5	-32.4	42.87	68.2	-25.33	331	140	H
3	3.37669	41.43	PK-U	32.7	-32	42.13	68.2	-26.07	249	205	V
4	7.79851	38.55	PK-U	36.2	-27	47.75	68.2	-20.45	206	234	H
5	13.87051	36.83	PK-U	39.4	-23.2	53.03	68.2	-15.17	162	268	H
6	17.10523	35.85	PK-U	42	-21.6	56.25	68.2	-11.95	104	301	V

PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

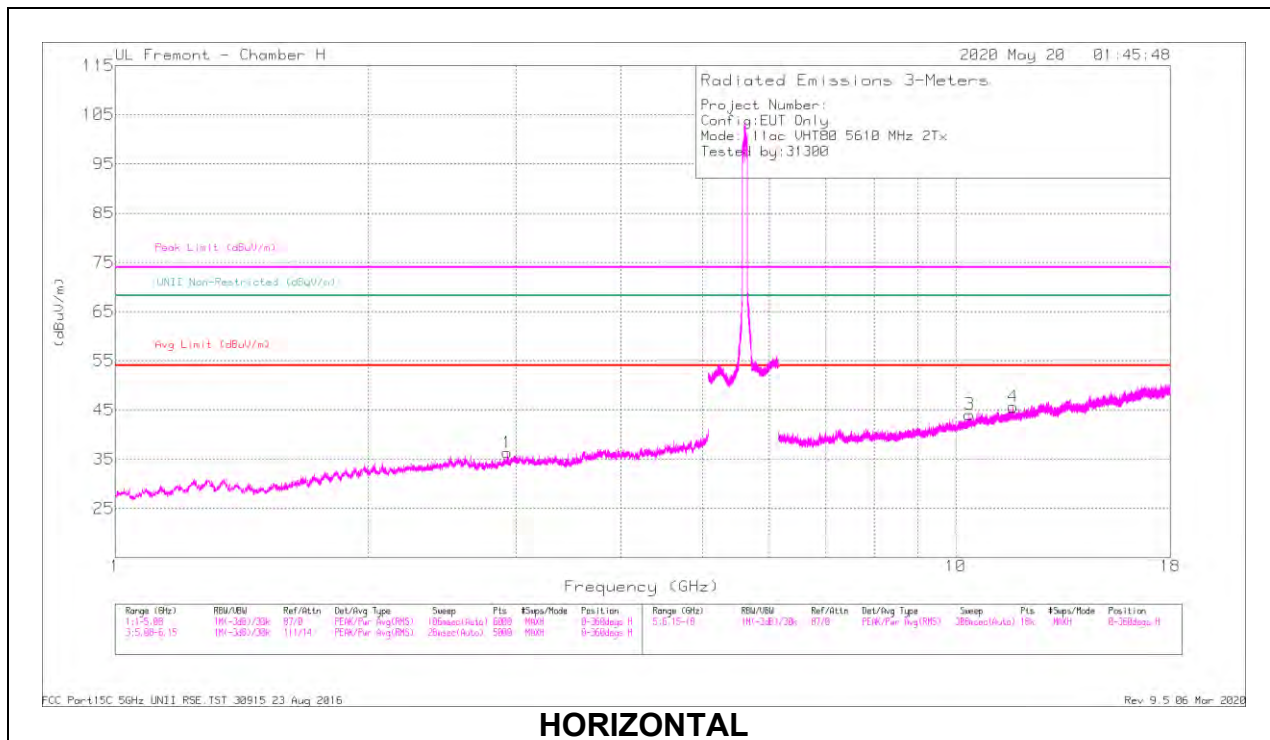

HORIZONTAL

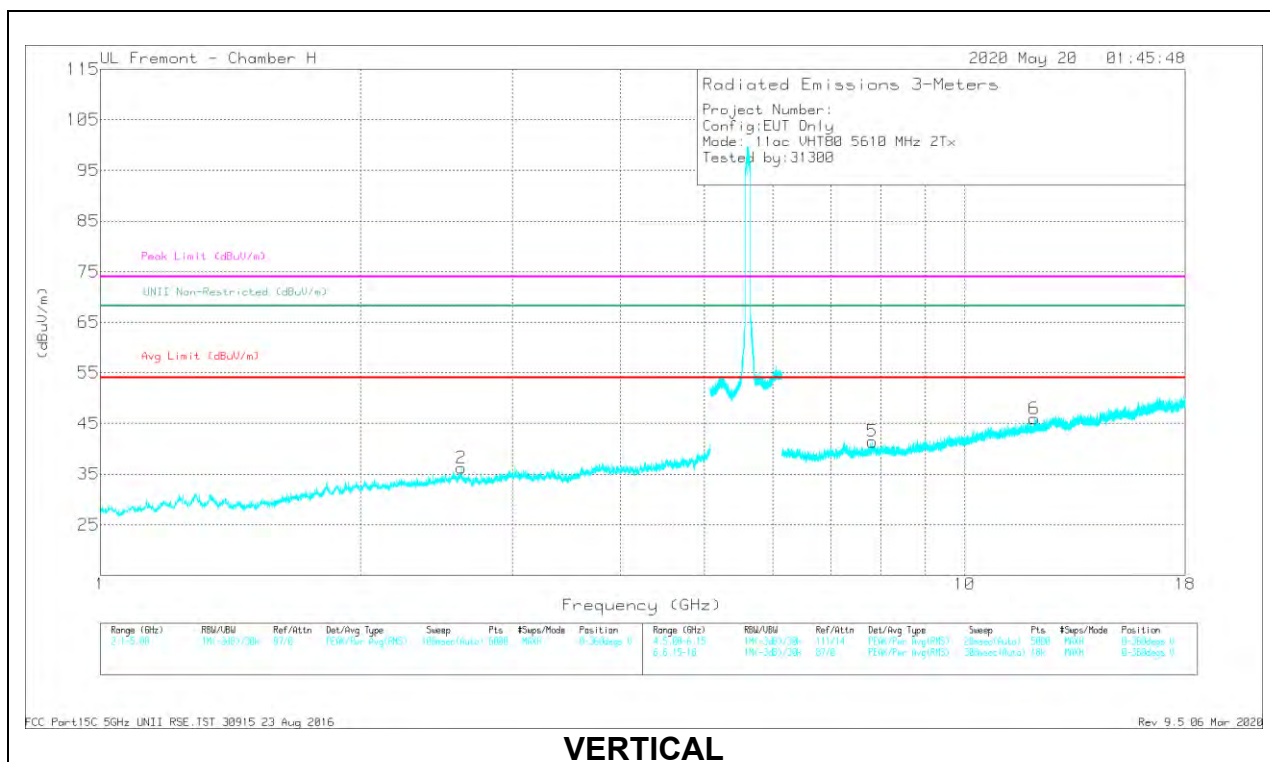


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 11.69994	36.79	PK-U	38.4	-23.3		51.89	-	-	74	-22.11	-	-	108	101	H
	* 11.69899	25.07	ADR	38.4	-23.3	33	40.50	54	-13.50	-	-	-	-	108	101	H
6	* 12.04086	37.01	PK-U	38.8	-24		51.81	-	-	74	-22.19	-	-	213	101	V
	* 12.0414	25.28	ADR	38.8	-24	33	40.41	54	-13.59	-	-	-	-	213	101	V
2	2.6156	42.53	PK-U	32.5	-32.3		42.73	-	-	-	-	68.2	-25.47	212	200	V
1	2.92635	42.66	PK-U	32.6	-32		43.26	-	-	-	-	68.2	-24.94	360	101	H
5	7.82127	38.4	PK-U	36.2	-26.7		47.9	-	-	-	-	68.2	-20.3	192	101	V
3	10.38034	37.37	PK-U	37.4	-24.6		50.17	-	-	-	-	68.2	-18.03	330	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 138 RESULTS

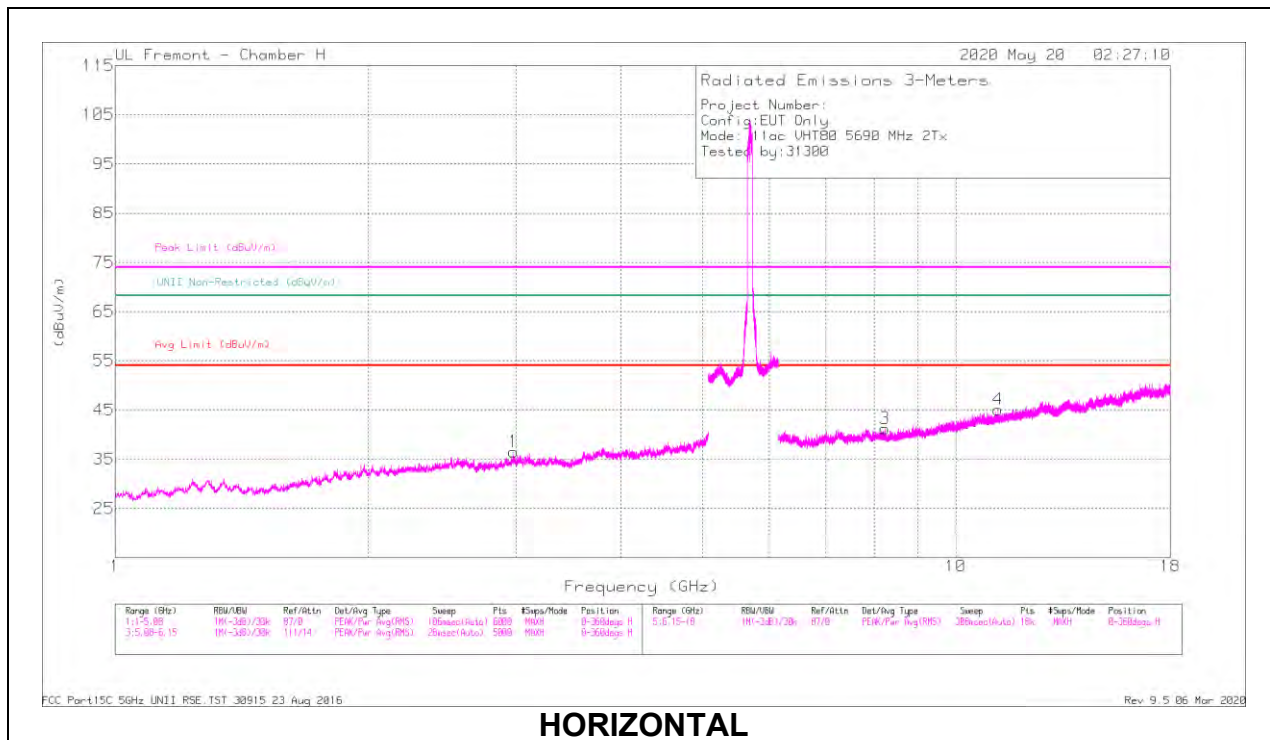

HORIZONTAL

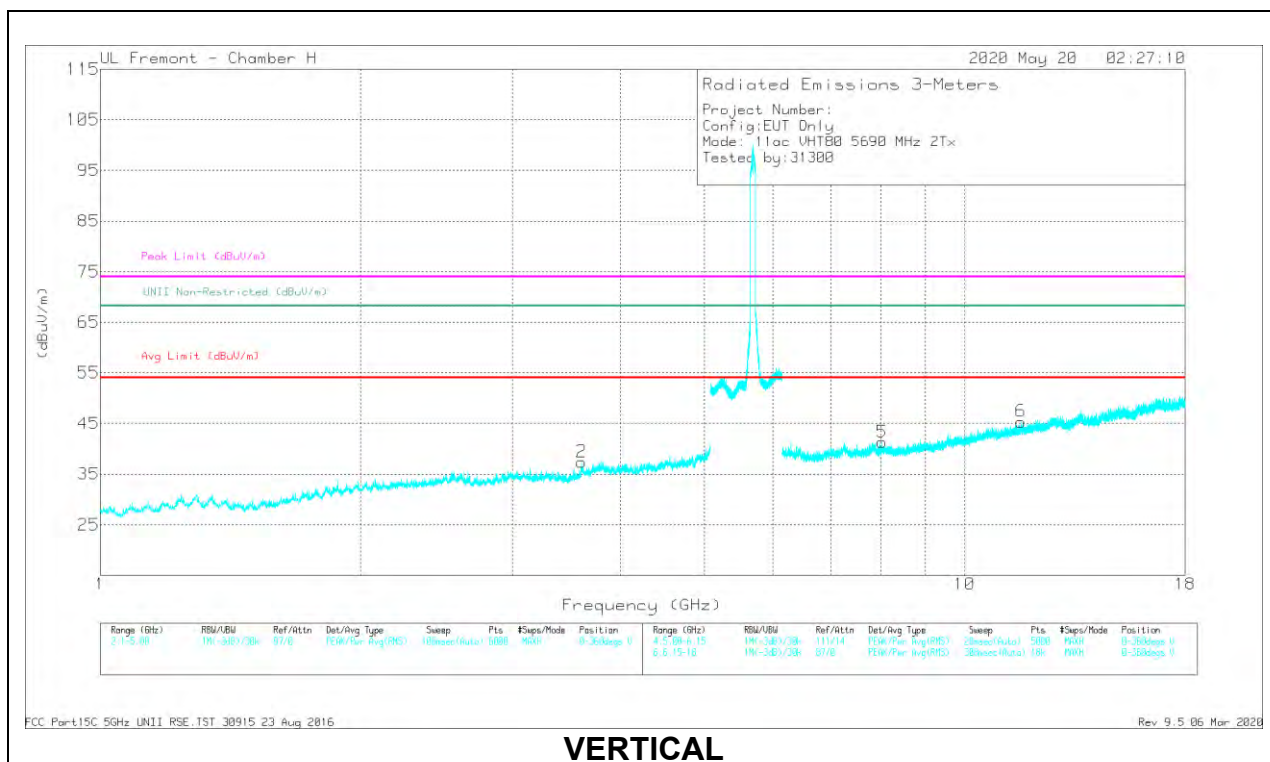

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.60804	43.34	PK-U	33	-32.3		44.04	-	-	74	-29.96	-	-	0	101	V
	* 3.60526	31.61	ADR	33	-32.4	.33	32.54	54	-21.46	-	-	-	-	0	101	V
3	* 8.24064	37.95	PK-U	36.1	-26.9		47.15	-	-	74	-26.85	-	-	69	101	H
	* 8.24299	26.45	ADR	36.1	-26.9	.33	35.98	54	-18.02	-	-	-	-	69	101	H
4	* 11.22122	37.24	PK-U	37.9	-24		51.14	-	-	74	-22.86	-	-	136	101	H
	* 11.22062	26.05	ADR	37.9	-23.9	.33	40.38	54	-13.62	-	-	-	-	136	101	H
5	* 8.02605	38.69	PK-U	36.1	-26.9		47.89	-	-	74	-26.11	-	-	98	101	V
	* 8.02676	27.39	ADR	36.1	-26.9	.33	36.92	54	-17.08	-	-	-	-	98	101	V
6	* 11.61765	37.11	PK-U	38.4	-23.5		52.01	-	-	74	-21.99	-	-	156	101	V
	* 11.61946	25.61	ADR	38.4	-23.5	.33	40.84	54	-13.16	-	-	-	-	156	101	V
1	2.97672	42.47	PK-U	32.8	-31.7		43.57	-	-	-	-	68.2	-24.63	28	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

6.1.16. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.6 GHz BAND

1TX ANTENNA 6 – 242 Tones, RU Index 61

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

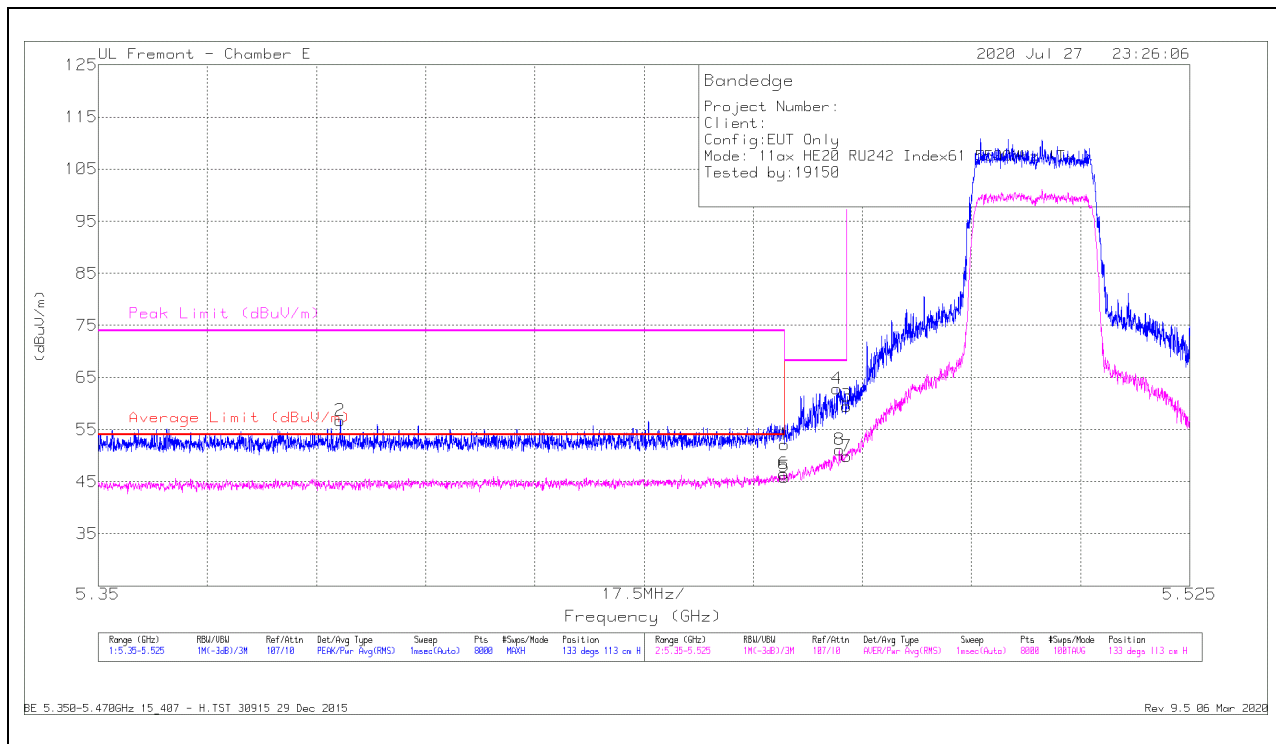

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filter/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	39.32	Pk	34.5	-21.7	52.12	-	-	74	-21.88	133	113	H
2	* 5.38881	44.03	Pk	34.4	-21.7	56.73	-	-	74	-17.27	133	113	H
5	* 5.45998	33.07	RMS	34.5	-21.7	45.87	54	-8.13	-	-	133	113	H
6	* 5.45992	33.68	RMS	34.5	-21.7	46.48	54	-7.52	-	-	133	113	H
4	5.4684	50.05	Pk	34.5	-21.7	62.85	-	-	68.2	-5.35	133	113	H
8	5.46882	38.29	RMS	34.5	-21.7	51.09	-	-	-	-	133	113	H
3	5.46998	46.64	Pk	34.6	-21.7	59.54	-	-	68.2	-8.66	133	113	H
7	5.46998	37.02	RMS	34.6	-21.7	49.92	-	-	-	-	133	113	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

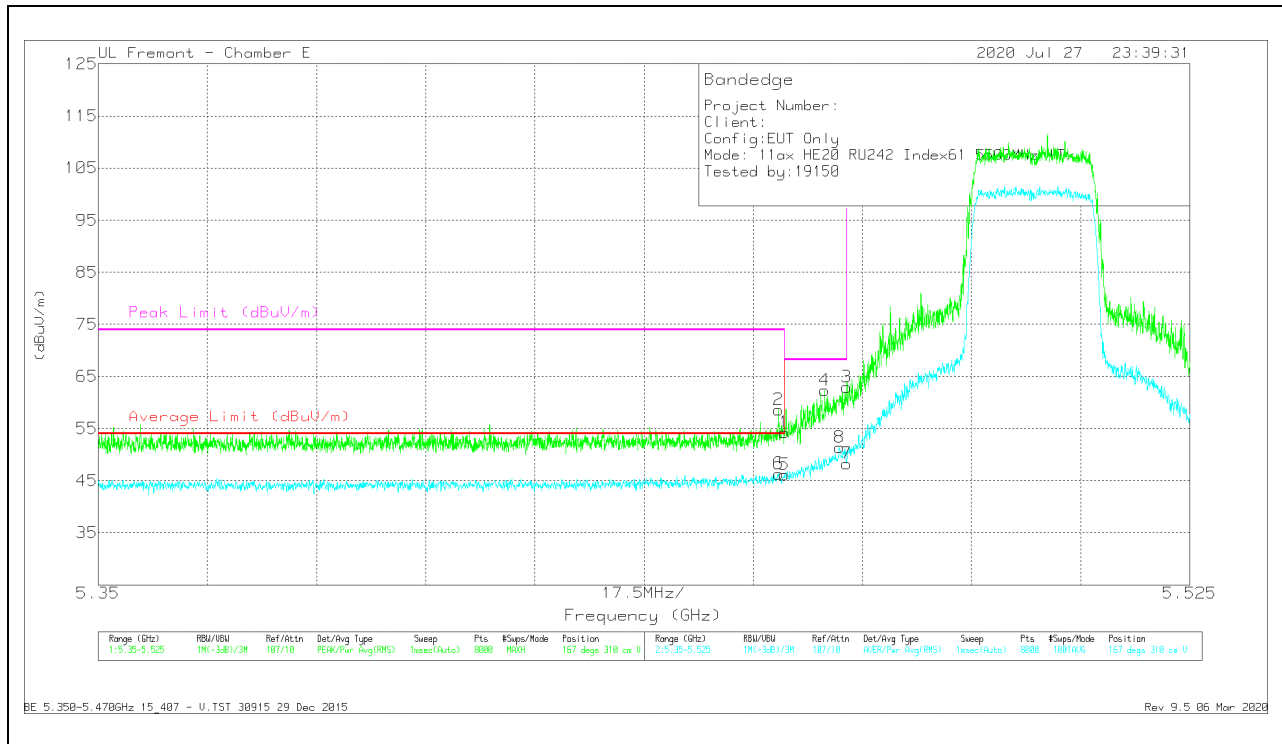


Marker	Frequency (GHz)	Meter Reading (dBu)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.5	Pk	34.5	-21.7	54.3	-	-	74	-19.7	167	310	V
2	* 5.45908	45.7	Pk	34.6	-21.7	58.6	-	-	74	-15.4	167	310	V
5	* 5.45998	33.29	RMS	34.5	-21.7	46.09	54	-7.91	-	-	167	310	V
6	* 5.45911	33.43	RMS	34.6	-21.7	46.33	54	-7.67	-	-	167	310	V
4	5.46648	49.57	Pk	34.5	-21.7	62.37	-	-	68.2	-5.83	167	310	V
8	5.46882	38.6	RMS	34.5	-21.7	51.4	-	-	-	-	167	310	V
3	5.46998	50.03	Pk	34.6	-21.7	62.93	-	-	68.2	-5.27	167	310	V
7	5.46998	35.37	RMS	34.6	-21.7	48.27	-	-	-	-	167	310	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

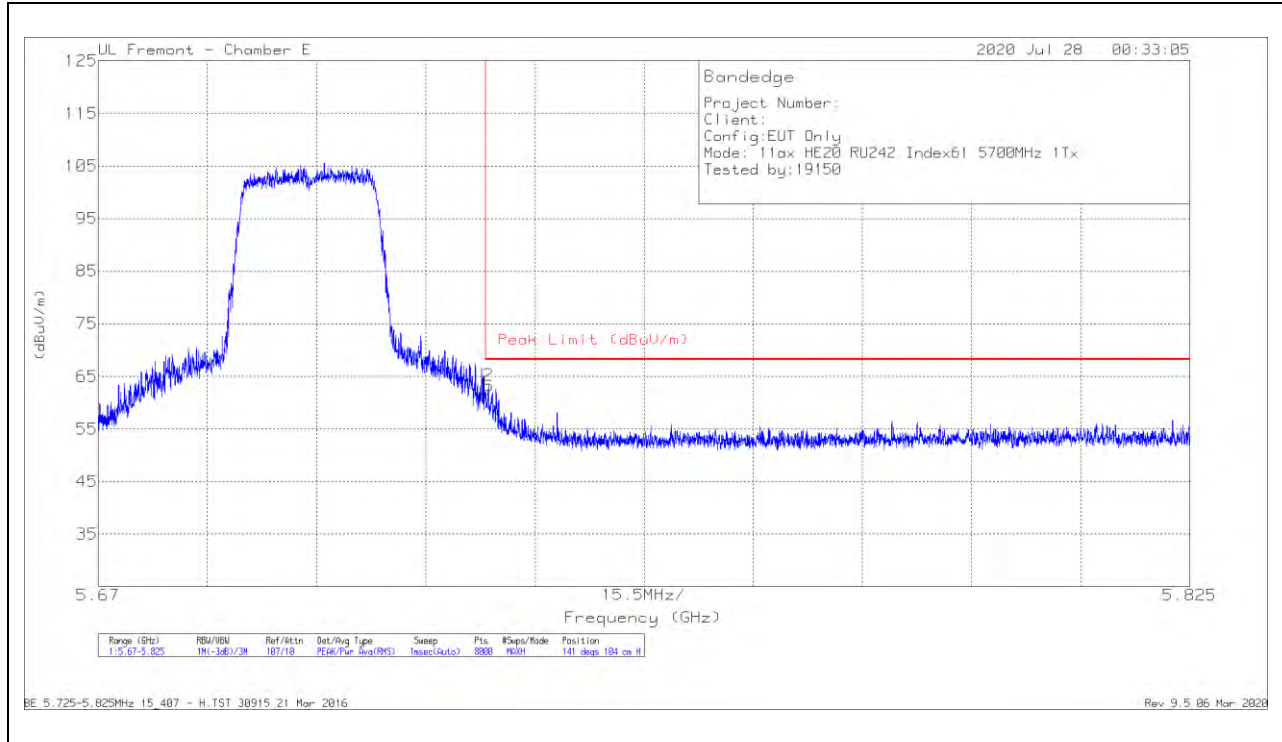

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.94	Pk	34.7	-21.2	61.44	68.2	-6.76	141	104	H
2	5.72542	49.77	Pk	34.7	-21.2	63.27	68.2	-4.93	141	104	H

Pk - Peak detector

VERTICAL RESULT

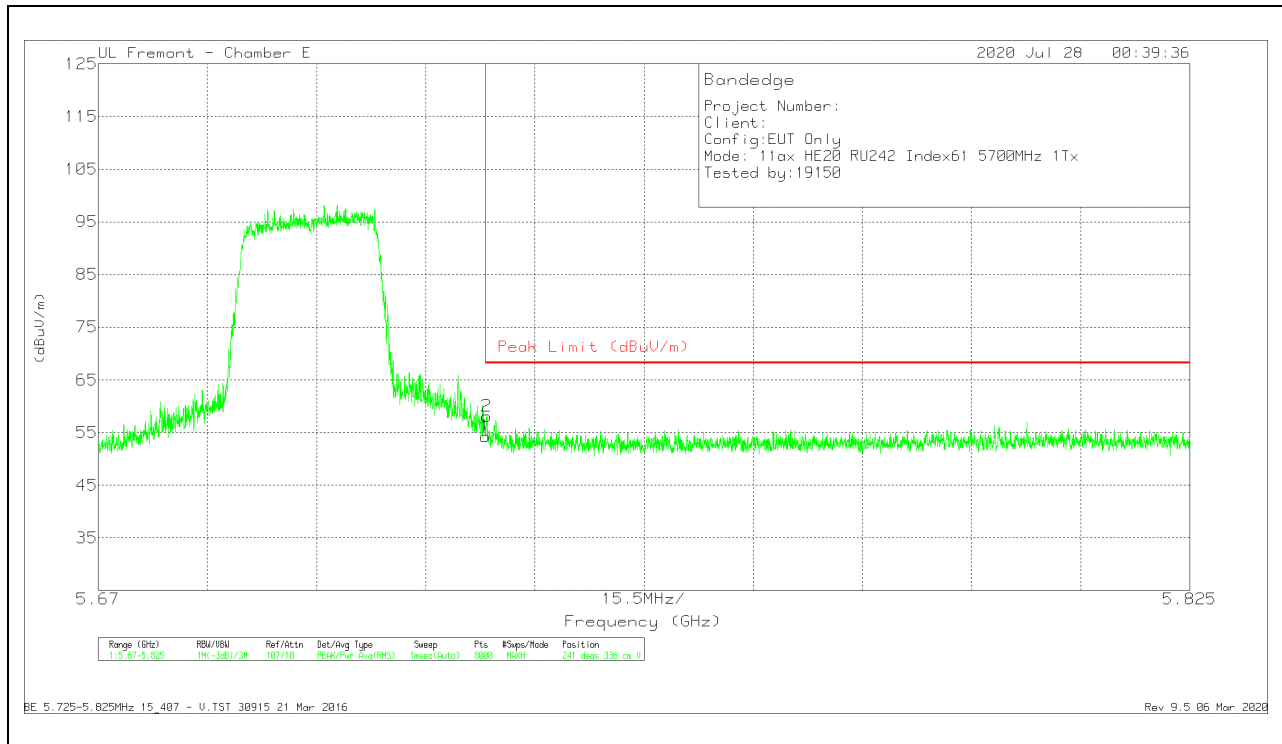


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.79	Pk	34.7	-21.2	54.29	68.2	-13.91	241	336	V
2	5.72519	44.62	Pk	34.7	-21.2	58.12	68.2	-10.08	241	336	V

Pk - Peak detector

1TX ANTENNA 6 – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

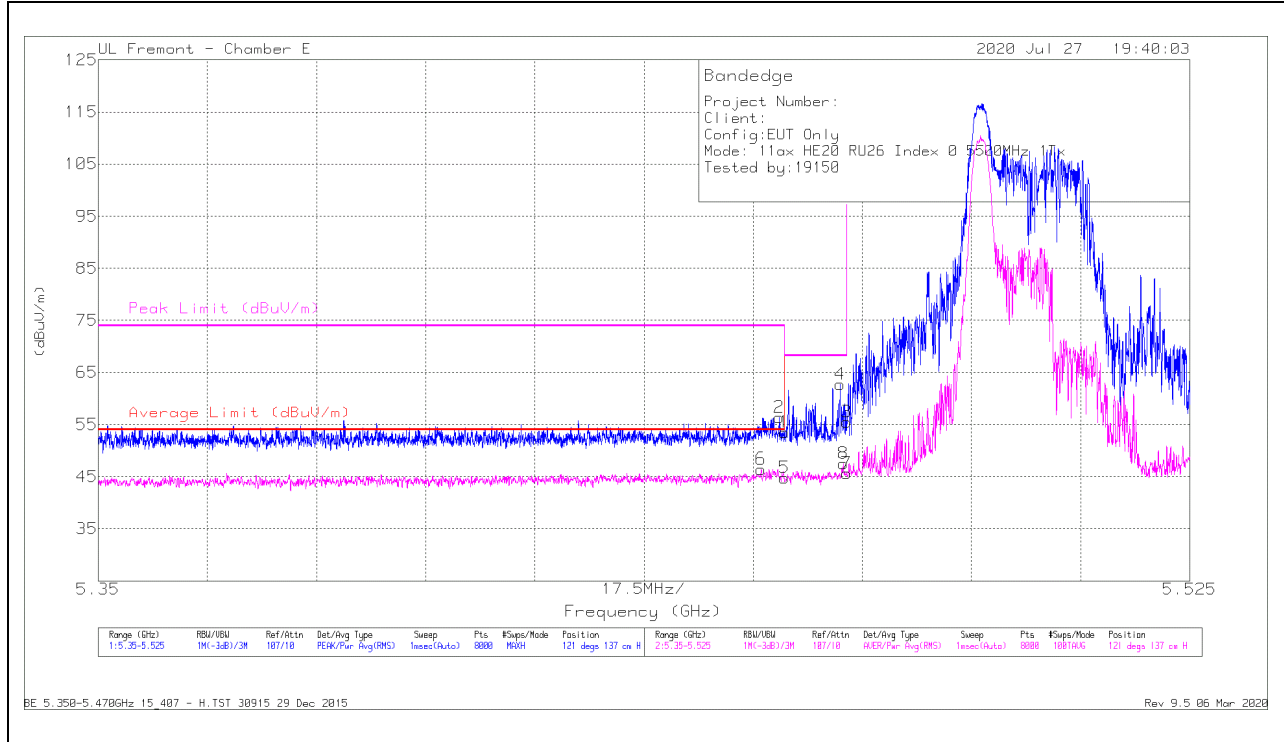

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.68	Pk	34.5	-21.7	53.48	-	-	74	-20.52	121	137	H
2	* 5.45919	43.5	Pk	34.6	-21.7	56.4	-	-	74	-17.6	121	137	H
5	* 5.45998	31.95	RMS	34.5	-21.7	44.75	54	-9.25	-	-	121	137	H
6	* 5.45631	33.55	RMS	34.6	-21.7	46.45	54	-7.55	-	-	121	137	H
4	5.46895	49.92	Pk	34.5	-21.7	62.72	-	-	68.2	-5.48	121	137	H
8	5.46945	34.58	RMS	34.6	-21.7	47.48	-	-	-	-	121	137	H
3	5.46998	42.62	Pk	34.6	-21.7	55.52	-	-	68.2	-12.68	121	137	H
7	5.46998	32.75	RMS	34.6	-21.7	45.65	-	-	-	-	121	137	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

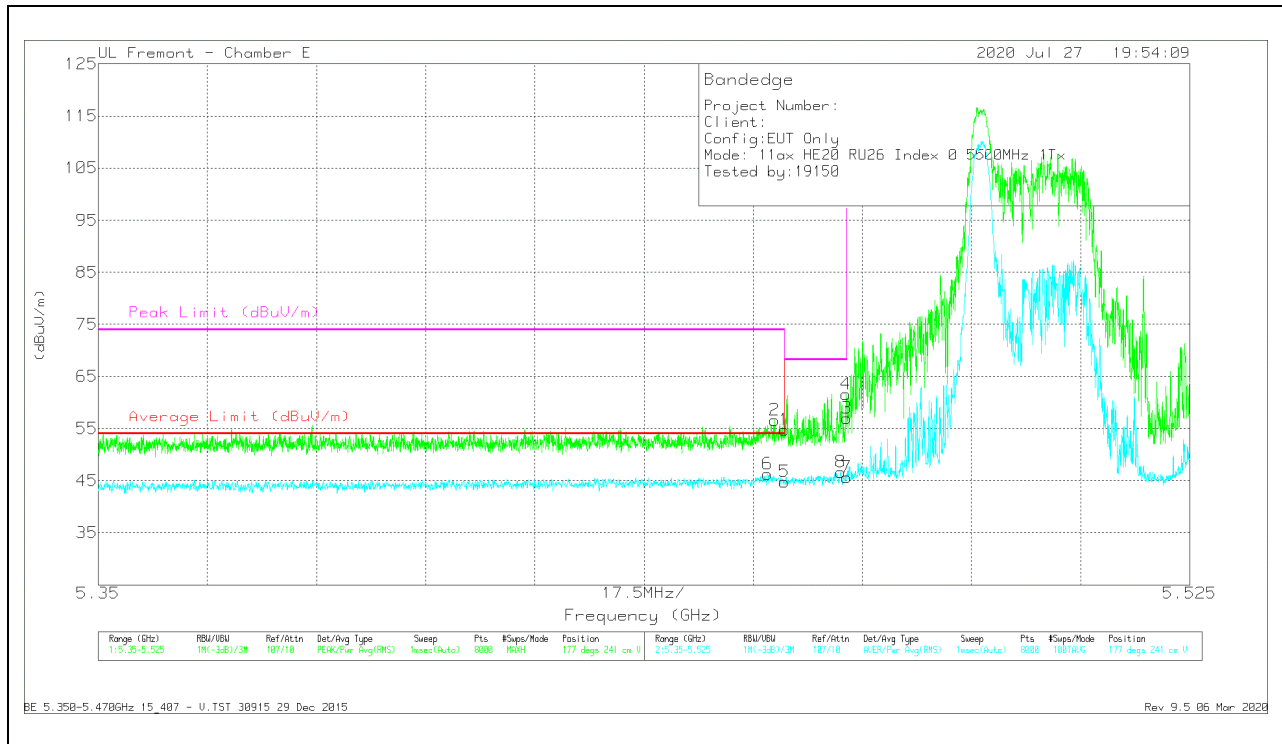


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	41.99	Pk	34.5	-21.7	54.79	-	-	74	-19.21	177	241	V
2	* 5.45847	43.7	Pk	34.6	-21.7	56.6	-	-	74	-17.4	177	241	V
5	* 5.45998	31.94	RMS	34.5	-21.7	44.74	54	-9.26	-	-	177	241	V
6	* 5.45729	33.41	RMS	34.6	-21.7	46.31	54	-7.69	-	-	177	241	V
8	5.46904	33.79	RMS	34.6	-21.7	46.69	-	-	-	-	177	241	V
4	5.46987	48.71	Pk	34.6	-21.7	61.61	-	-	68.2	-6.59	177	241	V
3	5.46998	44.06	Pk	34.6	-21.7	56.96	-	-	68.2	-11.24	177	241	V
7	5.46998	32.78	RMS	34.6	-21.7	45.68	-	-	-	-	177	241	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANTENNA 6 – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

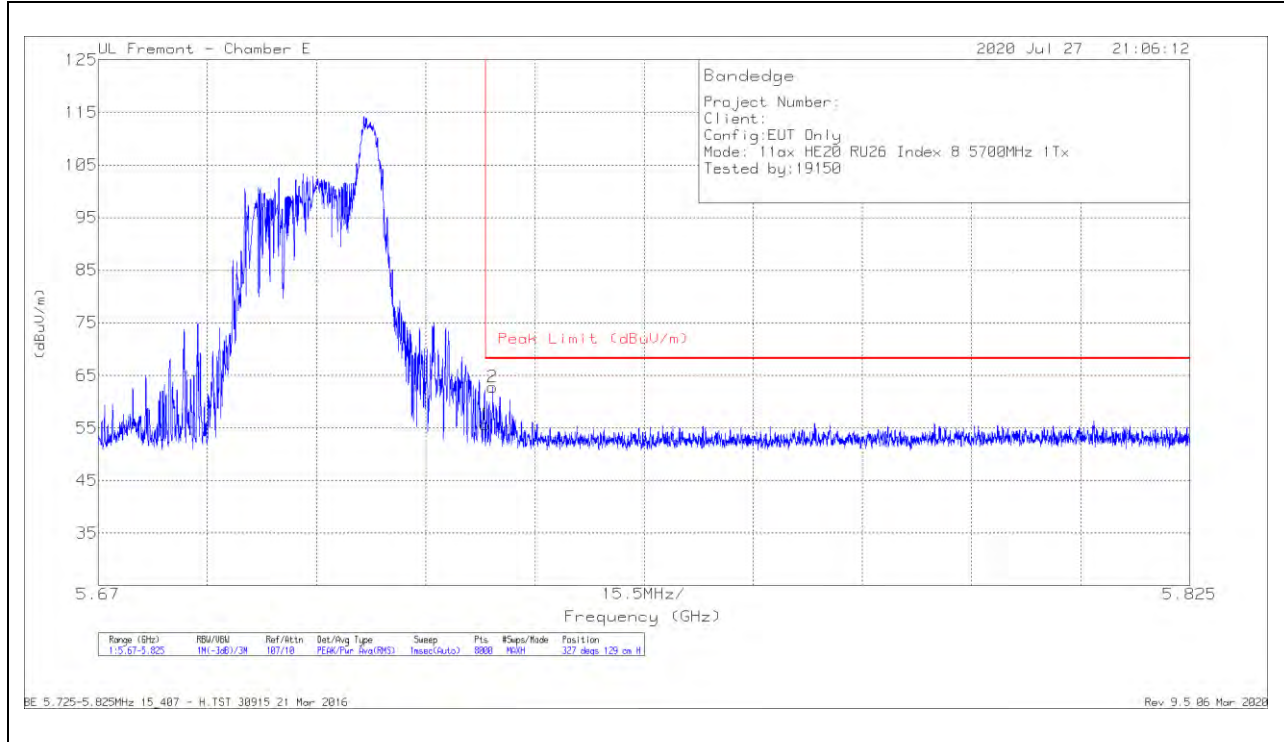

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	42.13	Pk	34.7	-21.2	55.63	68.2	-12.57	327	129	H
2	5.72598	49.27	Pk	34.7	-21.2	62.77	68.2	-5.43	327	129	H

Pk - Peak detector

VERTICAL RESULT

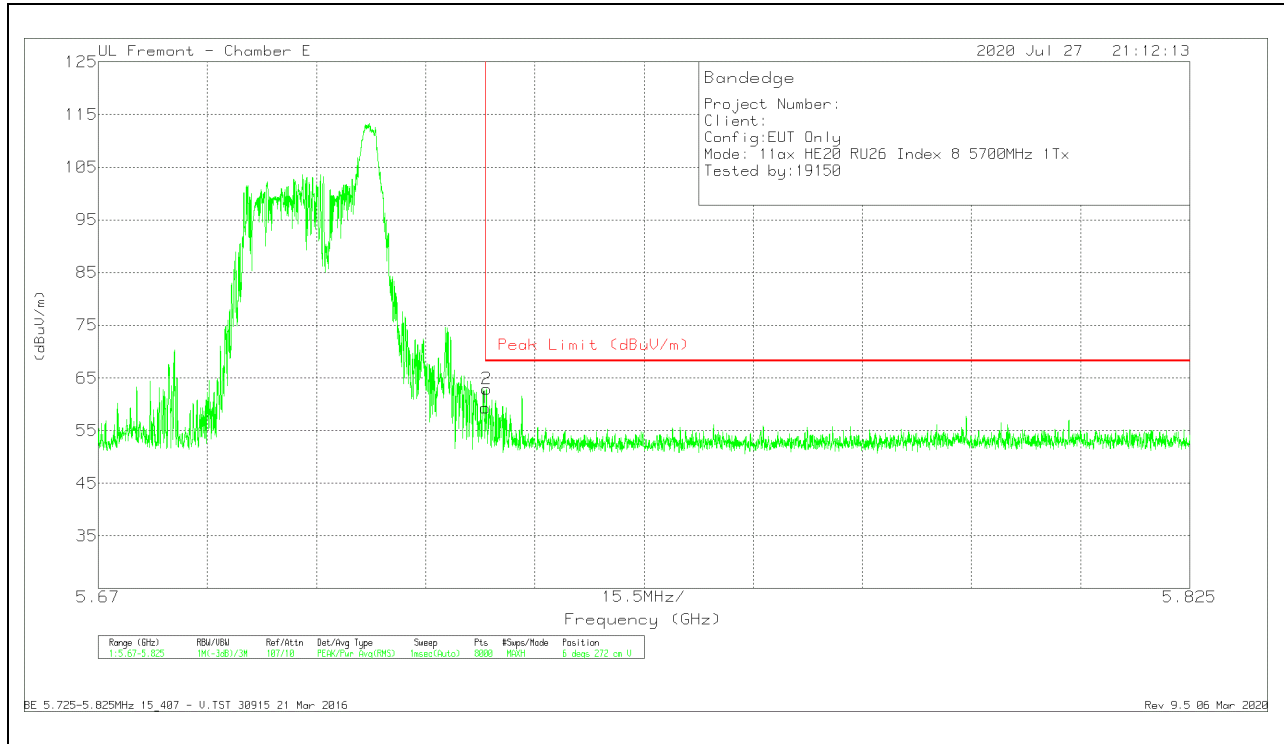


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.85	Pk	34.7	-21.2	59.35	68.2	-8.85	6	272	V
2	5.72513	49.35	Pk	34.7	-21.2	62.85	68.2	-5.35	6	272	V

Pk - Peak detector

1TX ANTENNA 5 – 242 Tones, RU Index 61

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

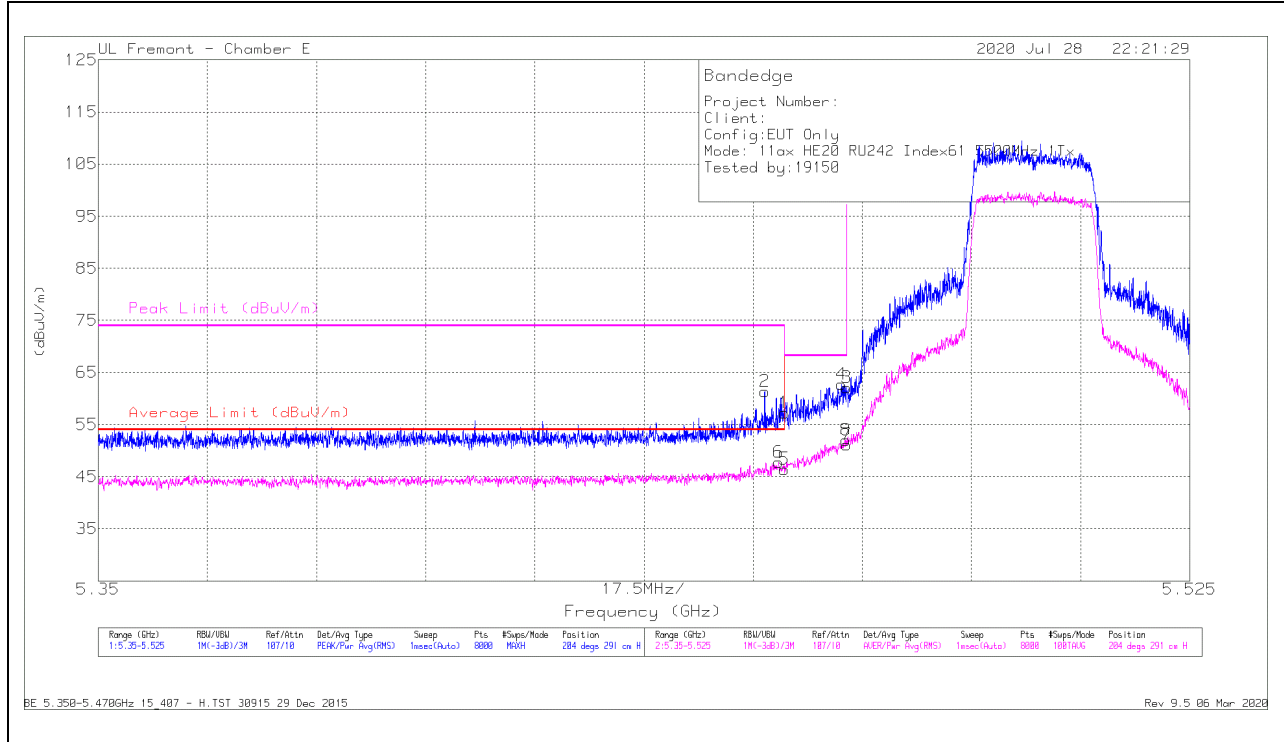

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	44.44	Pk	34.5	-21.7	57.24	-	-	74	-16.76	204	291	H
2	* 5.45685	48.44	Pk	34.6	-21.7	61.34	-	-	74	-12.66	204	291	H
5	* 5.45998	33.65	RMS	34.5	-21.7	46.45	54	-7.55	-	-	204	291	H
6	* 5.45906	34.87	RMS	34.6	-21.7	47.77	54	-6.23	-	-	204	291	H
4	5.46913	49.85	Pk	34.6	-21.7	62.75	-	-	68.2	-5.45	204	291	H
8	5.46989	39.12	RMS	34.6	-21.7	52.02	-	-	-	-	204	291	H
3	5.46998	49.17	Pk	34.6	-21.7	62.07	-	-	68.2	-6.13	204	291	H
7	5.46998	38.24	RMS	34.6	-21.7	51.14	-	-	-	-	204	291	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

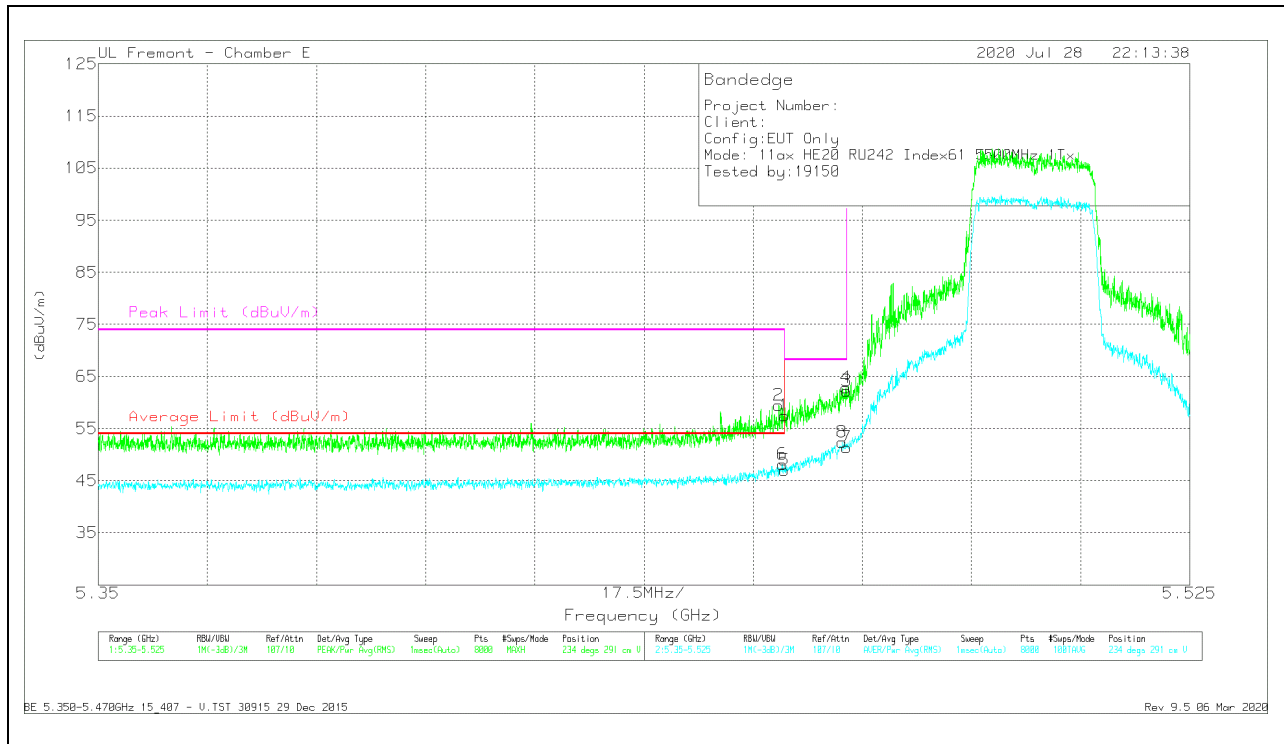


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	44.63	Pk	34.5	-21.7	57.43	-	-	74	-16.57	234	291	V
2	* 5.45911	46.58	Pk	34.6	-21.7	59.48	-	-	74	-14.52	234	291	V
5	* 5.45998	34.26	RMS	34.5	-21.7	47.06	54	-6.94	-	-	234	291	V
6	* 5.45967	35.21	RMS	34.6	-21.7	48.11	54	-5.89	-	-	234	291	V
8	5.46926	39.52	RMS	34.6	-21.7	52.42	-	-	-	-	234	291	V
4	5.46985	49.97	Pk	34.6	-21.7	62.67	-	-	68.2	-5.33	234	291	V
3	5.46998	49.29	Pk	34.6	-21.7	62.19	-	-	68.2	-6.01	234	291	V
7	5.46998	38.53	RMS	34.6	-21.7	51.43	-	-	-	-	234	291	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

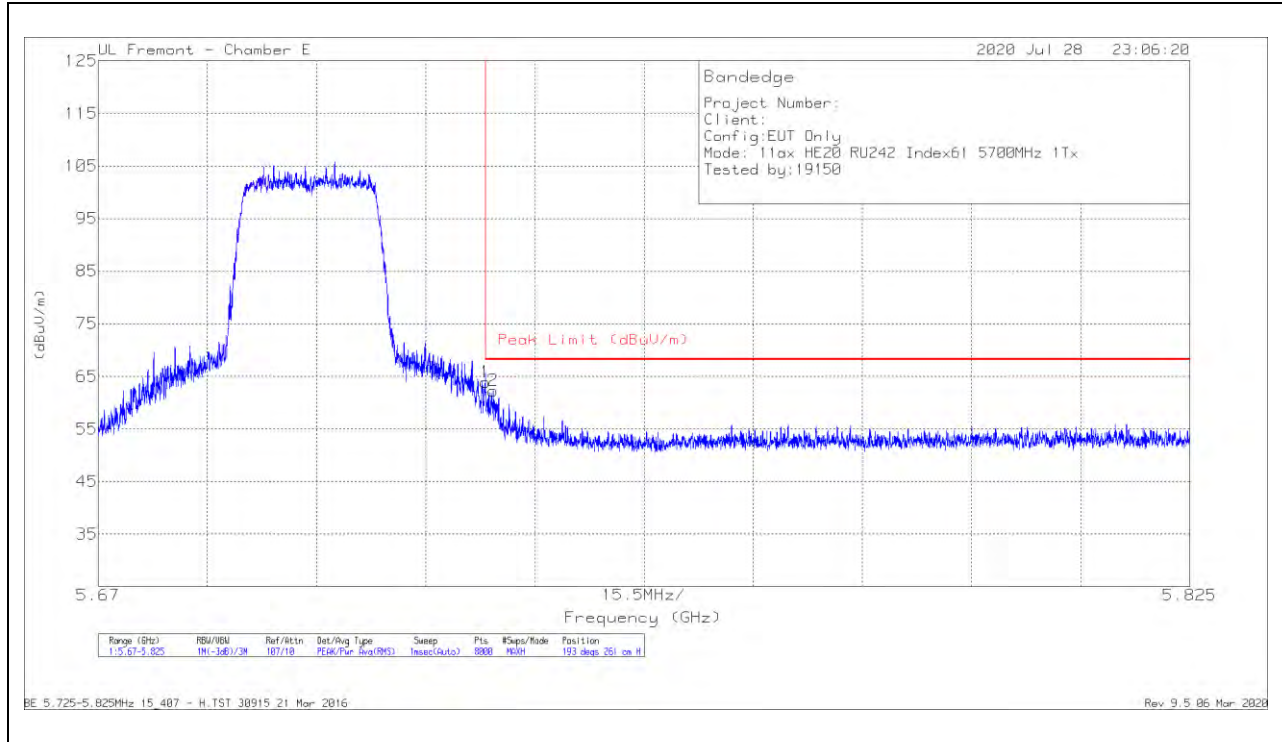

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	50.4	Pk	34.7	-21.2	63.9	68.2	-4.3	193	261	H
2	5.7261	48.82	Pk	34.7	-21.2	62.32	68.2	-5.88	193	261	H

Pk - Peak detector

VERTICAL RESULT

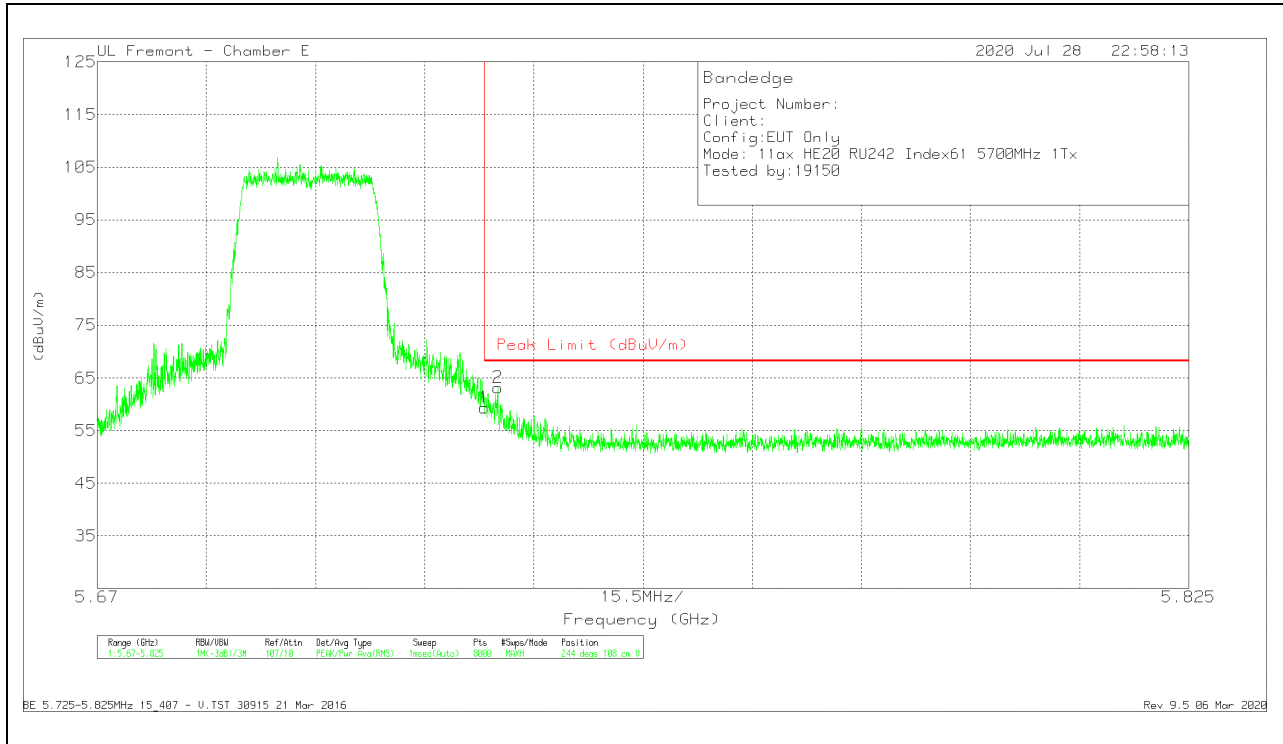


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.87	Pk	34.7	-21.2	59.37	68.2	-8.83	244	108	V
2	5.72689	49.67	Pk	34.7	-21.2	63.17	68.2	-5.03	244	108	V

Pk - Peak detector

1TX ANTENNA 5 – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

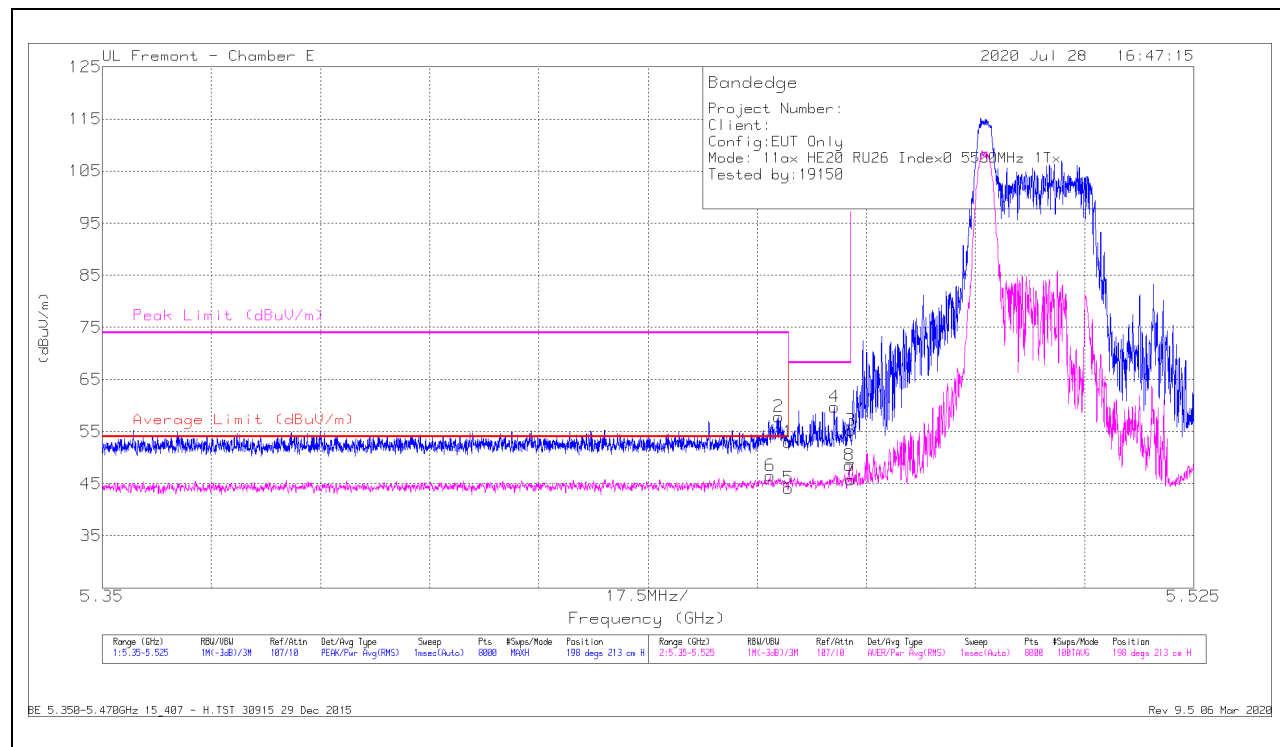

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.23	Pk	34.5	-21.7	53.03	-	-	74	-20.97	198	213	H
2	* 5.45843	44.95	Pk	34.6	-21.7	57.85	-	-	74	-16.15	198	213	H
5	* 5.45998	31.39	RMS	34.5	-21.7	44.19	54	-9.81	-	-	198	213	H
6	* 5.45709	33.58	RMS	34.6	-21.7	46.48	54	-7.52	-	-	198	213	H
4	5.46738	46.96	Pk	34.5	-21.7	59.76	-	-	68.2	-8.44	198	213	H
8	5.46976	35.57	RMS	34.6	-21.7	48.47	-	-	-	-	198	213	H
3	5.46998	42.32	Pk	34.6	-21.7	55.22	-	-	68.2	-12.98	198	213	H
7	5.46998	32.87	RMS	34.6	-21.7	45.77	-	-	-	-	198	213	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

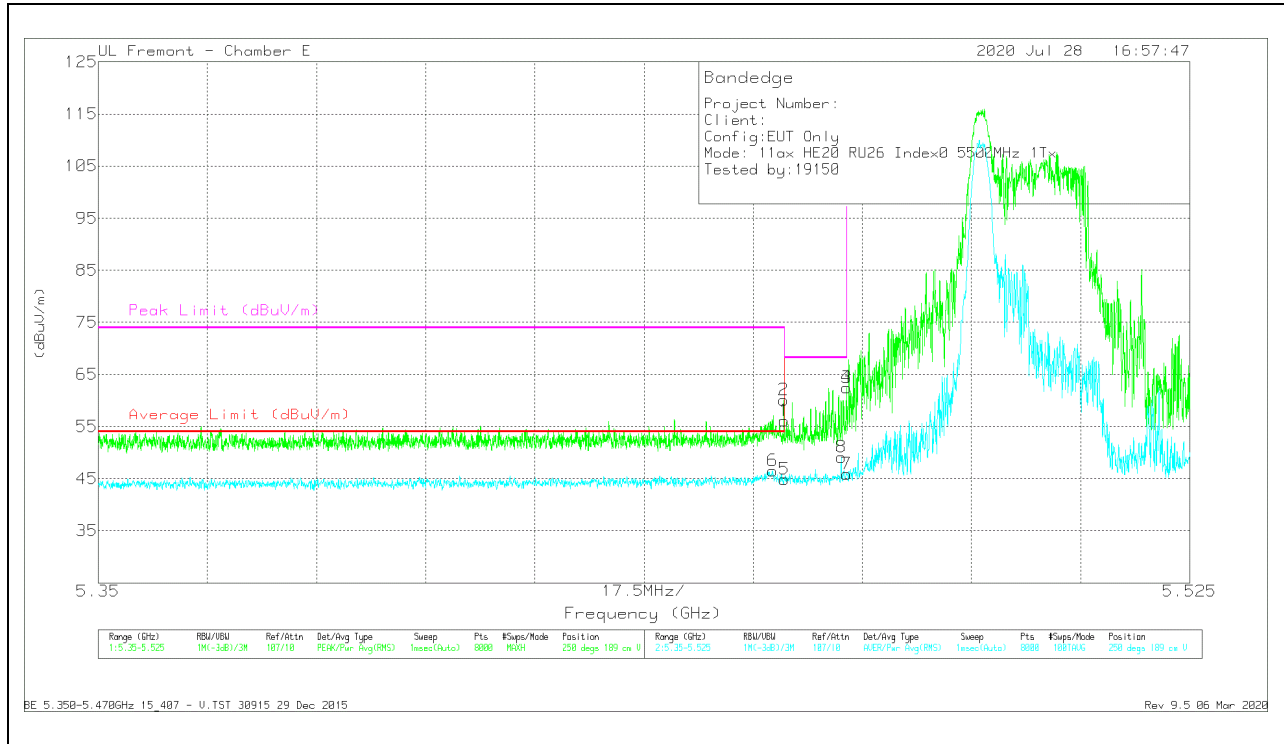


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	43.3	Pk	34.5	-21.7	56.1	-	-	74	-17.9	250	189	V
2	* 5.45994	47.31	Pk	34.5	-21.7	60.11	-	-	74	-13.89	250	189	V
5	* 5.45998	32.15	RMS	34.5	-21.7	44.95	54	-9.05	-	-	250	189	V
6	* 5.4581	33.65	RMS	34.6	-21.7	46.55	54	-7.45	-	-	250	189	V
8	5.46913	36.23	RMS	34.6	-21.7	49.13	-	-	-	-	250	189	V
4	5.46996	49.63	Pk	34.6	-21.7	62.53	-	-	68.2	-5.67	250	189	V
3	5.46998	49.62	Pk	34.6	-21.7	62.52	-	-	68.2	-5.68	250	189	V
7	5.46996	33.03	RMS	34.6	-21.7	45.93	-	-	-	-	250	189	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANTENNA 5 – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

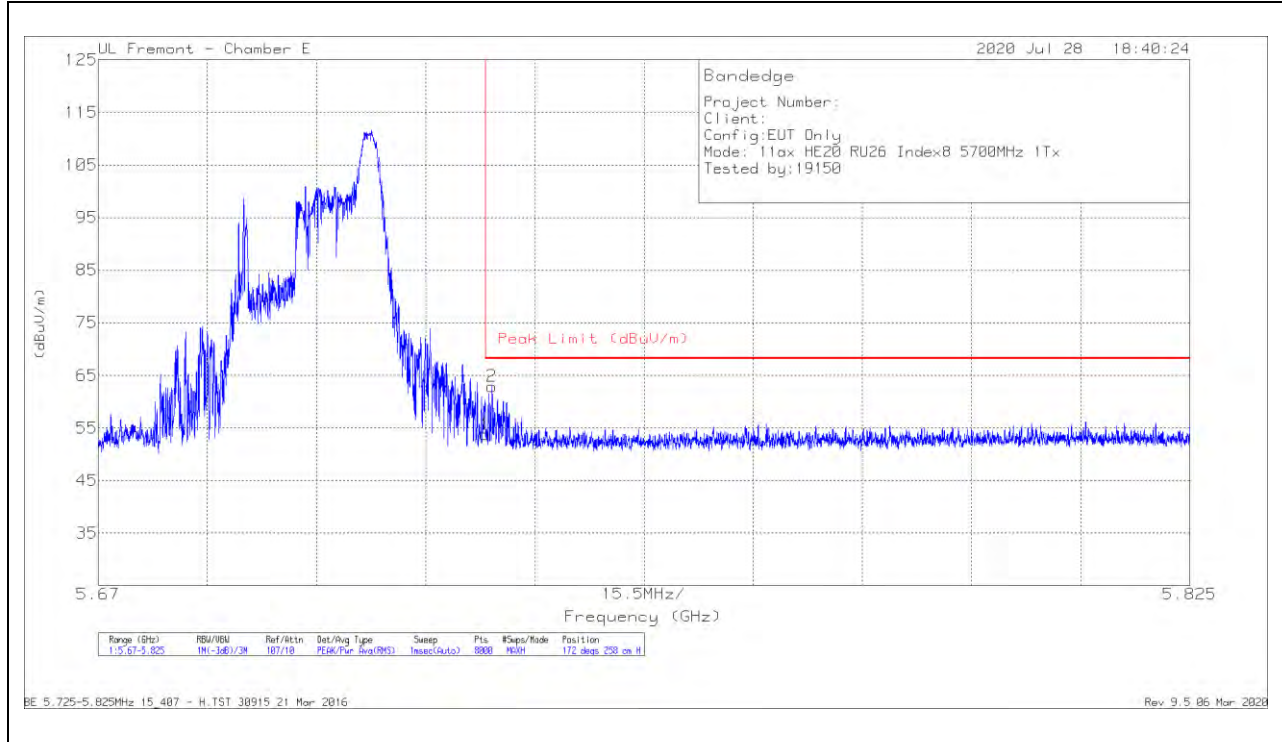

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.28	Pk	34.7	-21.2	53.78	68.2	-14.42	172	258	H
2	5.7259	49.39	Pk	34.7	-21.2	62.89	68.2	-5.31	172	258	H

Pk - Peak detector

VERTICAL RESULT

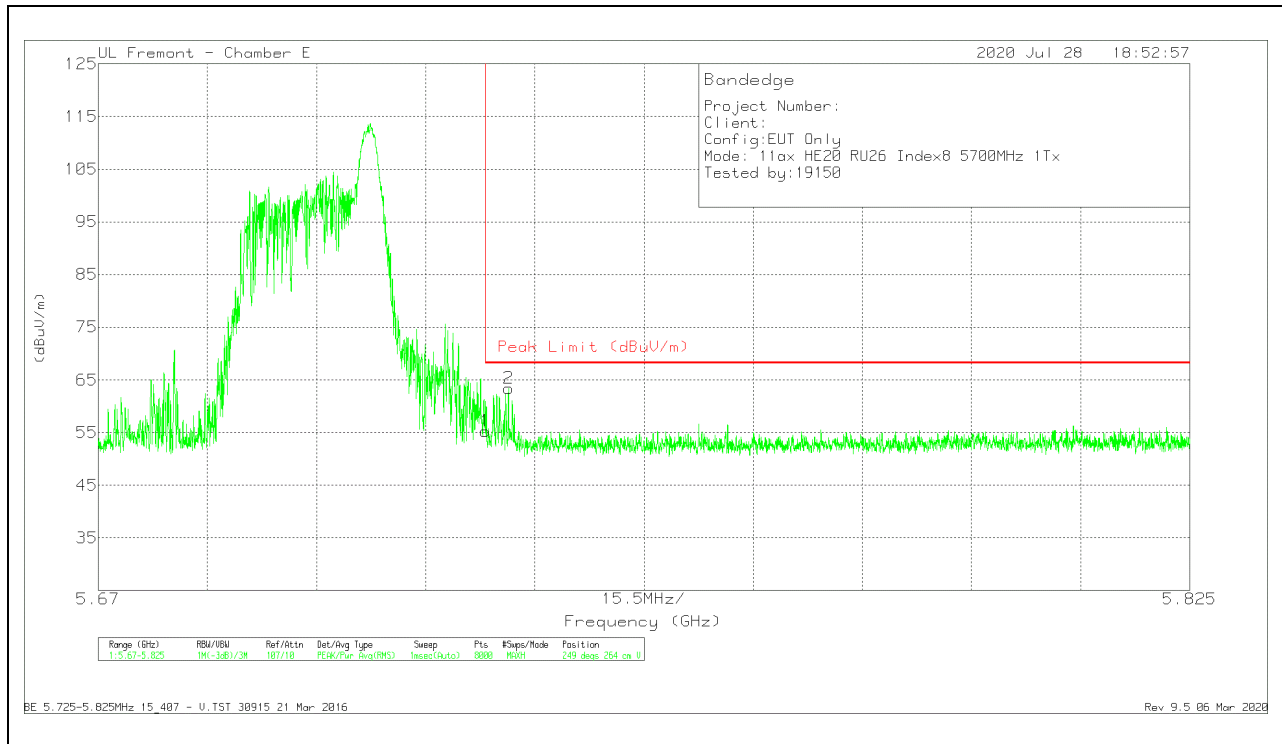


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	41.72	Pk	34.7	-21.2	55.22	68.2	-12.98	249	264	V
2	5.72827	49.9	Pk	34.7	-21.2	63.4	68.2	-4.8	249	264	V

Pk - Peak detector

2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 242 Tones, RU Index 61

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

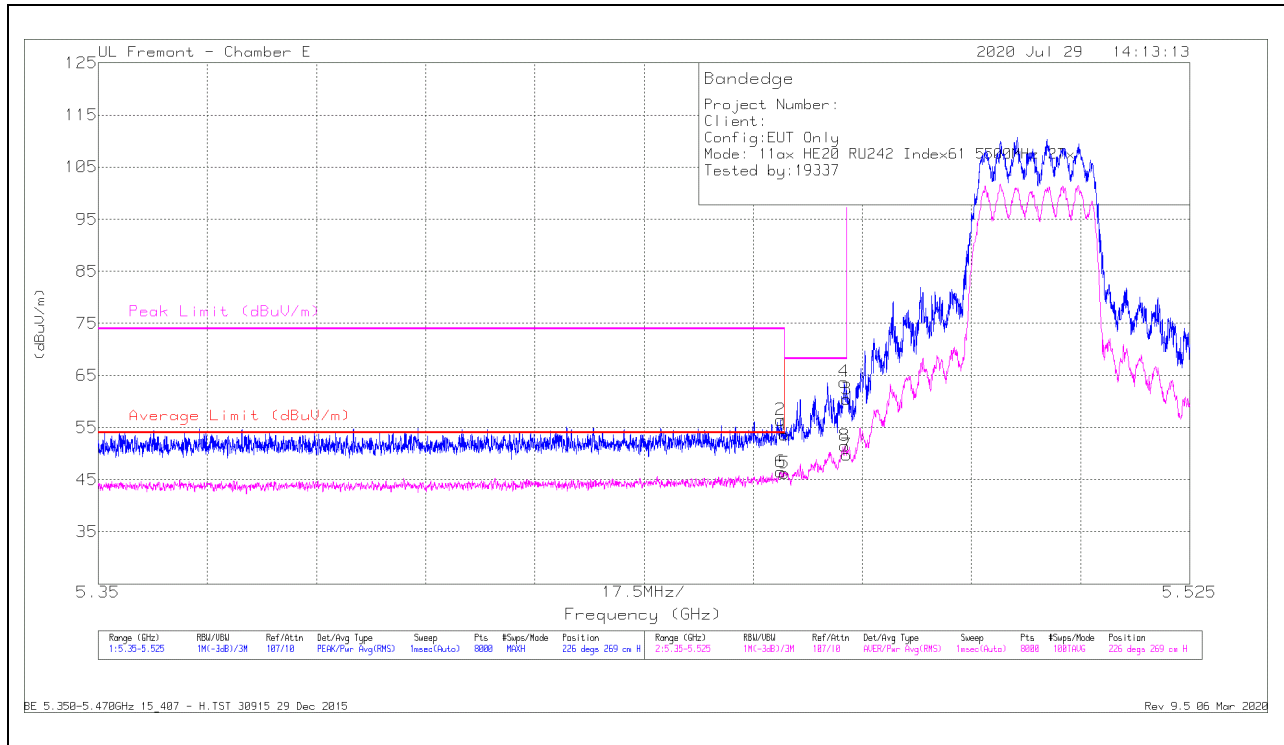

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.87	Pk	34.5	-21.7	53.67	-	-	74	-20.33	226	269	H
2	* 5.45939	43.53	Pk	34.6	-21.7	56.43	-	-	74	-17.57	226	269	H
5	* 5.45998	33.5	RMS	34.5	-21.7	46.3	54	-7.7	-	-	226	269	H
6	* 5.45943	33.56	RMS	34.6	-21.7	46.46	54	-7.54	-	-	226	269	H
4	5.46959	50.88	Pk	34.6	-21.7	63.78	-	-	68.2	-4.42	226	269	H
8	5.46969	38.65	RMS	34.6	-21.7	51.55	-	-	-	-	226	269	H
3	5.46998	47.53	Pk	34.6	-21.7	60.43	-	-	68.2	-7.77	226	269	H
7	5.46998	36.82	RMS	34.6	-21.7	49.72	-	-	-	-	226	269	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

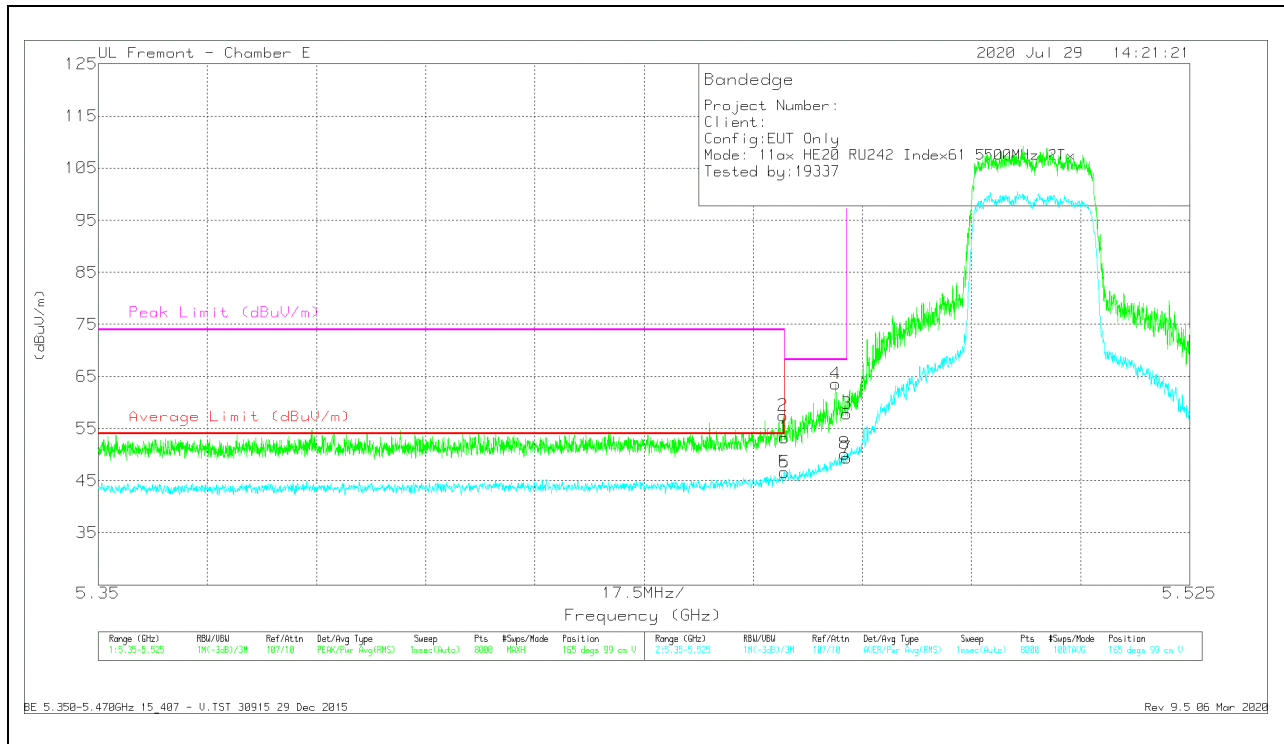


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	40.46	Pk	34.5	-21.7	53.26	-	-	74	-20.74	165	99	V
2	* 5.45983	44.72	Pk	34.5	-21.7	57.52	-	-	74	-16.48	165	99	V
5	* 5.45998	33.84	RMS	34.5	-21.7	46.64	54	-7.36	-	-	165	99	V
6	* 5.45996	33.84	RMS	34.5	-21.7	46.64	54	-7.36	-	-	165	99	V
4	5.46823	50.76	Pk	34.5	-21.7	63.56	-	-	68.2	-4.64	165	99	V
8	5.46967	37.29	RMS	34.6	-21.7	50.19	-	-	-	-	165	99	V
3	5.46998	44.92	Pk	34.6	-21.7	57.82	-	-	68.2	-10.38	165	99	V
7	5.46996	36.51	RMS	34.6	-21.7	49.41	-	-	-	-	165	99	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

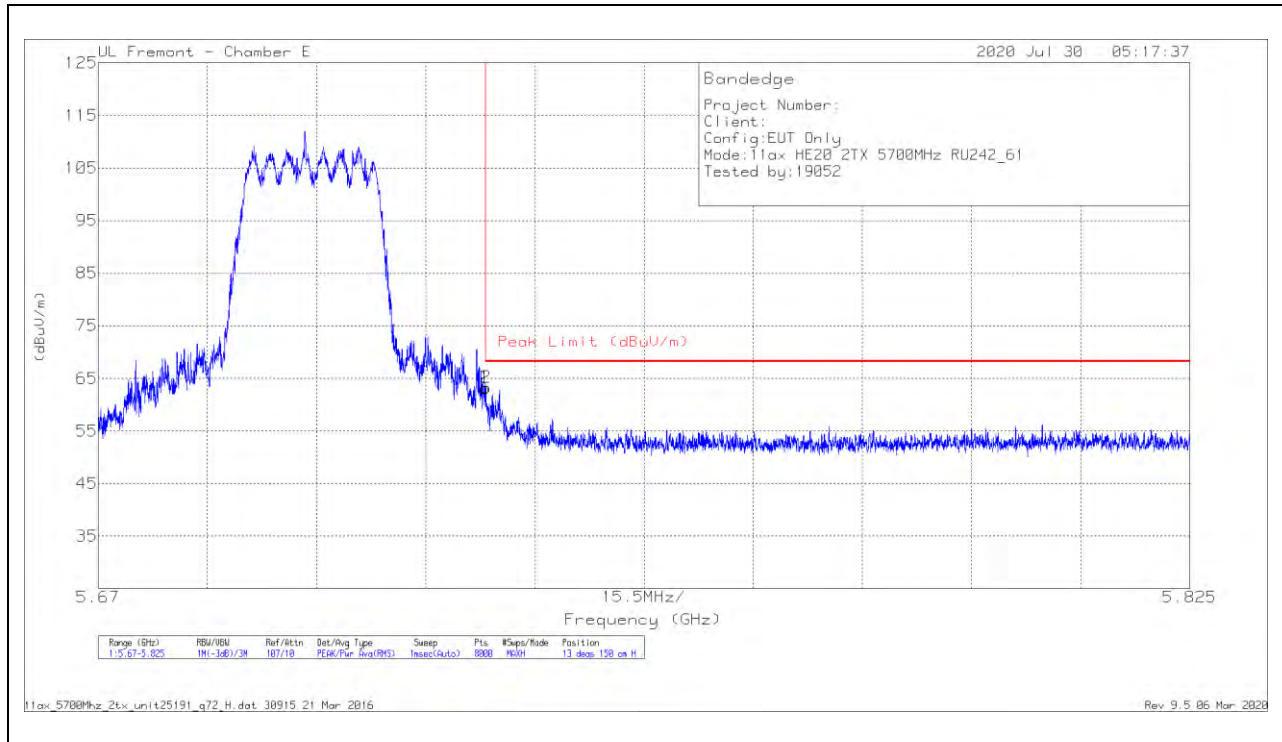

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	49.71	Pk	34.7	-21.2	63.21	68.2	-4.99	13	150	H
2	5.72503	49.72	Pk	34.7	-21.2	63.22	68.2	-4.98	13	150	H

Pk - Peak detector

VERTICAL RESULT

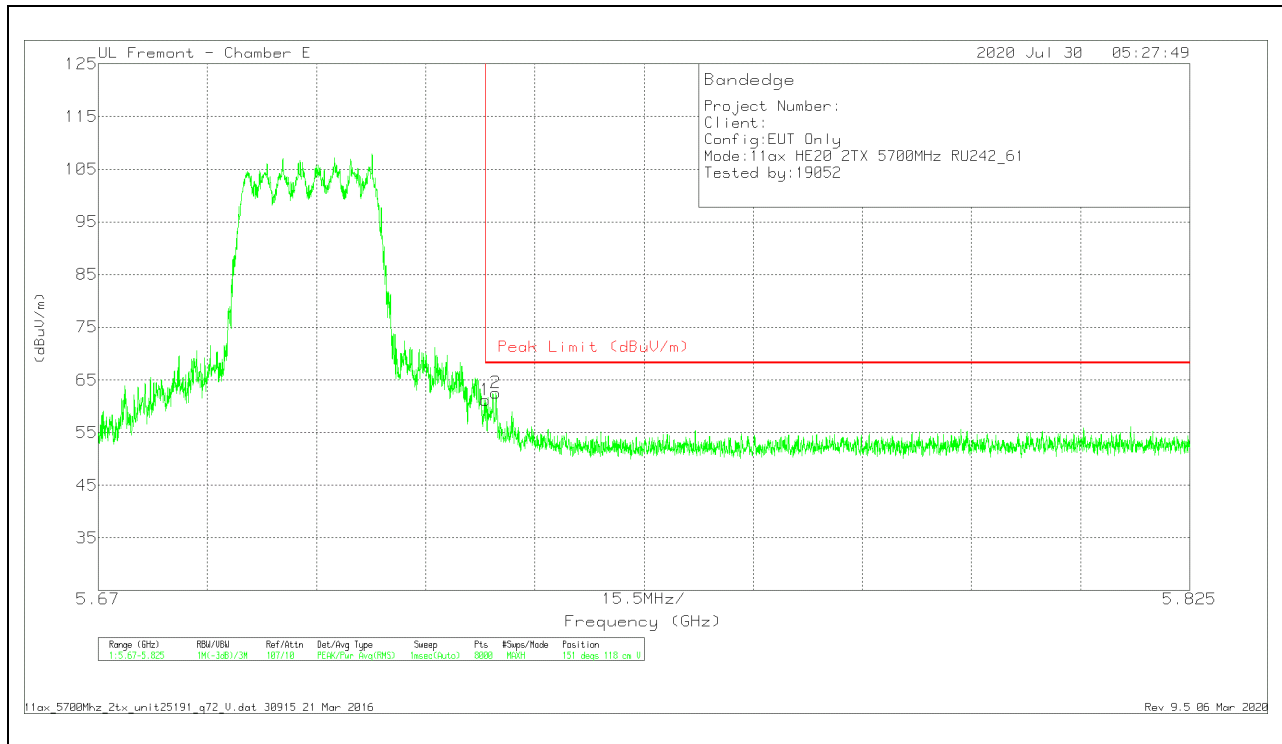


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	47.69	Pk	34.7	-21.2	61.19	68.2	-7.01	151	118	V
2	5.72648	48.98	Pk	34.7	-21.2	62.48	68.2	-5.72	151	118	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

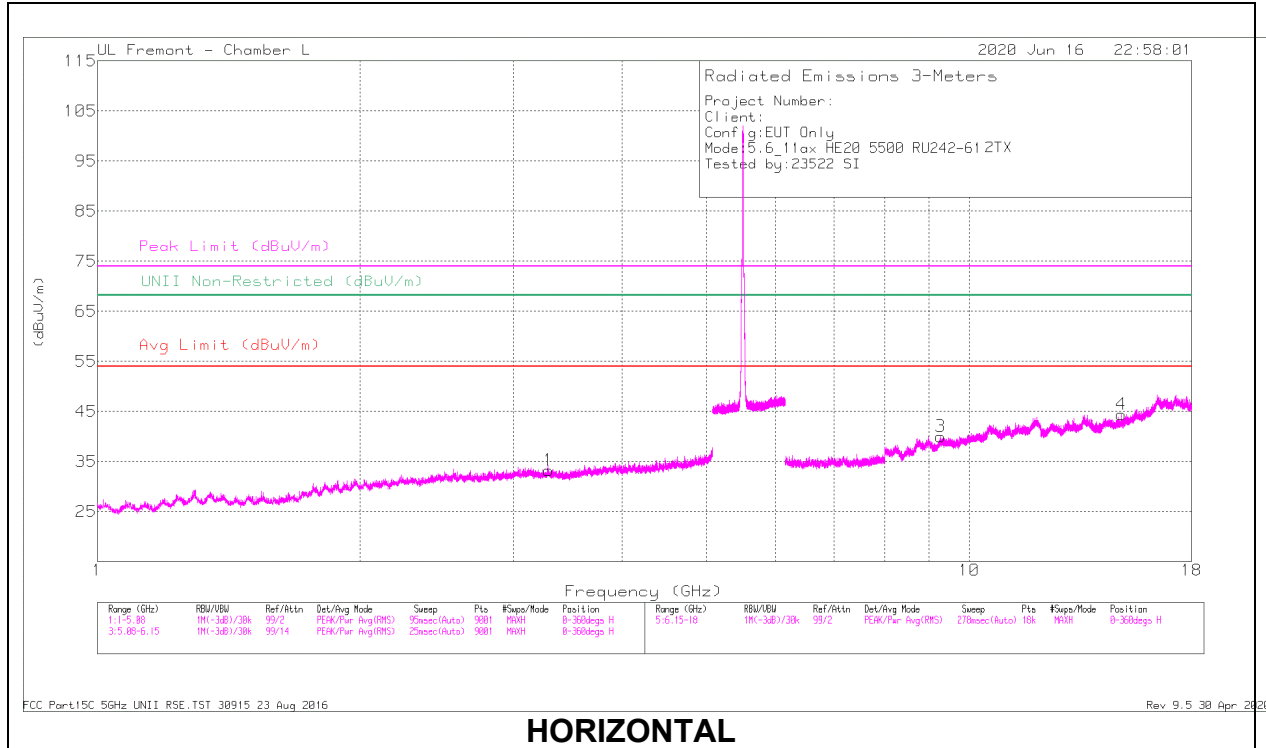

HORIZONTAL

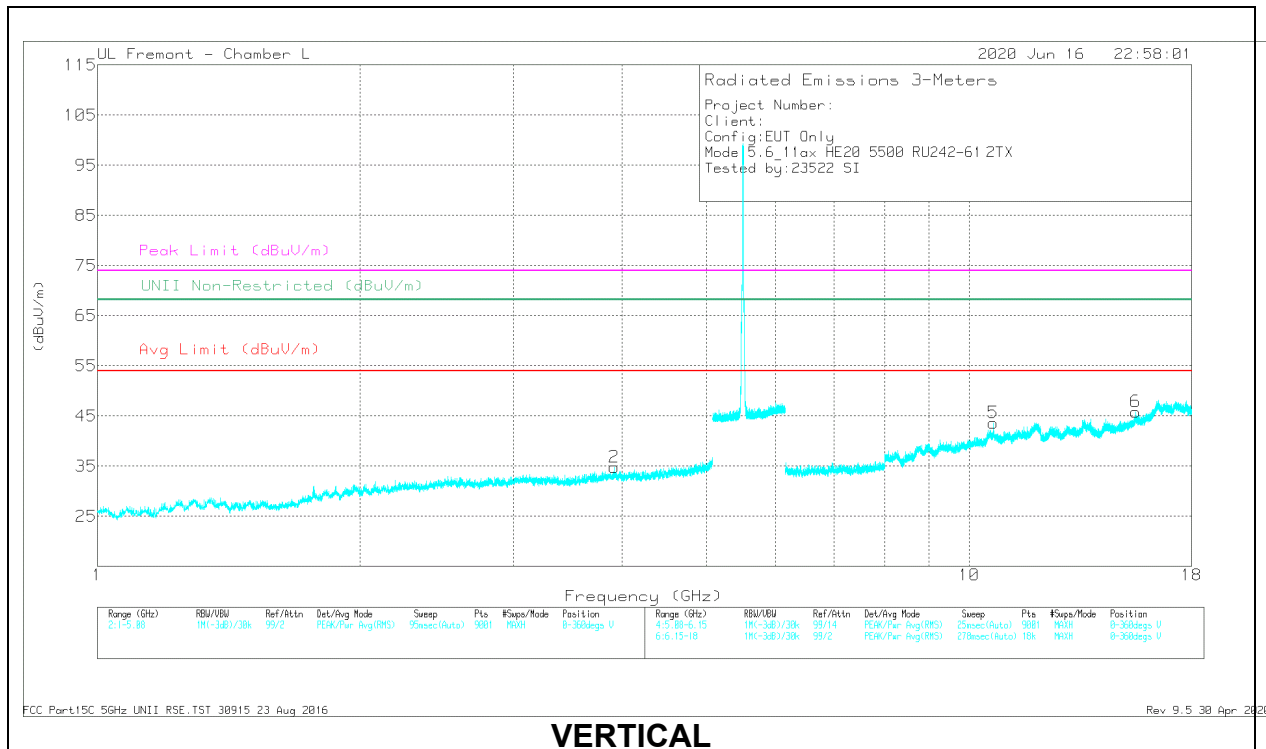


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.29247	37.1	PK-U	32.9	-29.2	40.8	-	-	-	-	68.2	-27.4	238	101	H
2	* 3.91883	35.57	PK-U	33.5	-27.5	41.57	-	-	74	-32.43	-	-	104	101	V
	* 3.91714	25.45	ADR	33.5	-27.4	31.55	54	-22.45	-	-	-	-	104	101	V
3	9.27009	31.21	PK-U	36.3	-20.3	47.21	-	-	-	-	68.2	-20.99	117	101	H
4	14.9587	29.71	PK-U	39.8	-18.9	50.61	-	-	-	-	68.2	-17.59	290	101	H
6	* 15.52991	30.24	PK-U	41	-18.5	52.74	-	-	74	-21.26	-	-	203	101	V
	* 15.52999	20.04	ADR	41	-18.5	42.54	54	-11.46	-	-	-	-	203	101	V
5	* 10.66725	29.87	PK-U	37.9	-19.5	48.27	-	-	74	-25.73	-	-	153	200	V
	* 10.66691	19.82	ADR	37.9	-19.5	38.22	54	-15.78	-	-	-	-	153	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

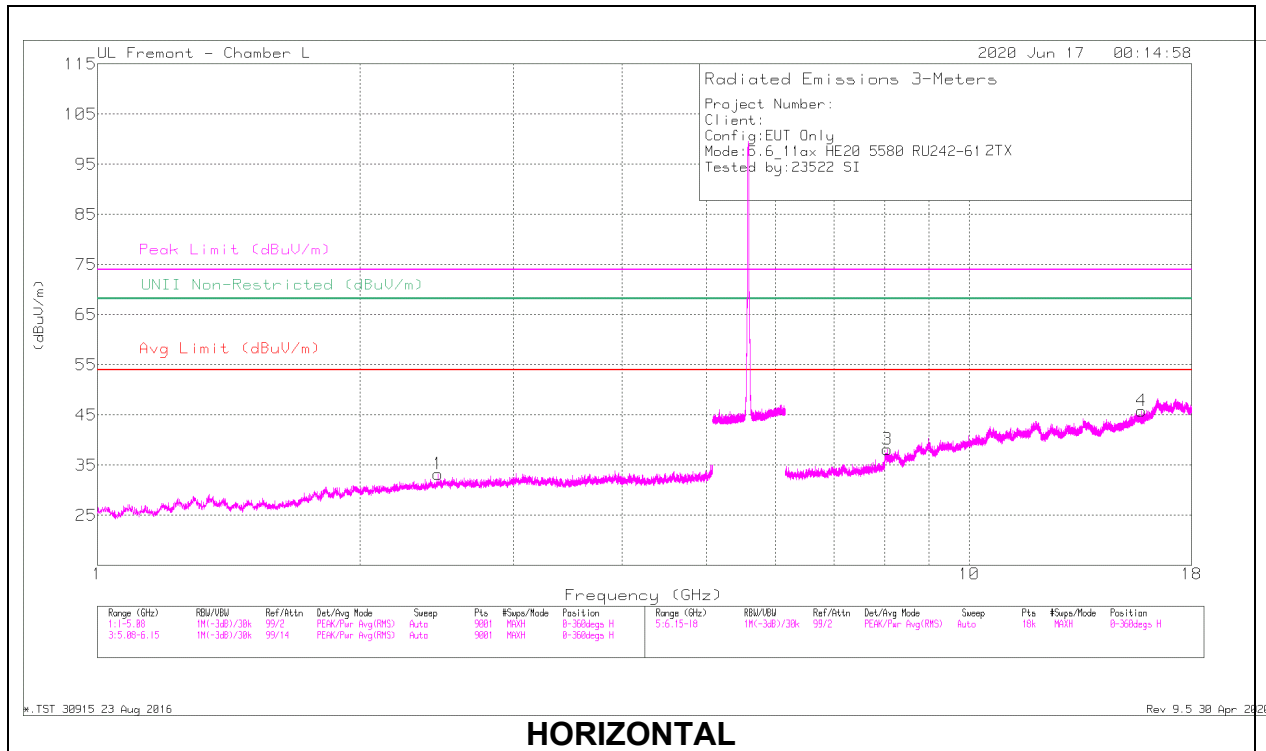

HORIZONTAL

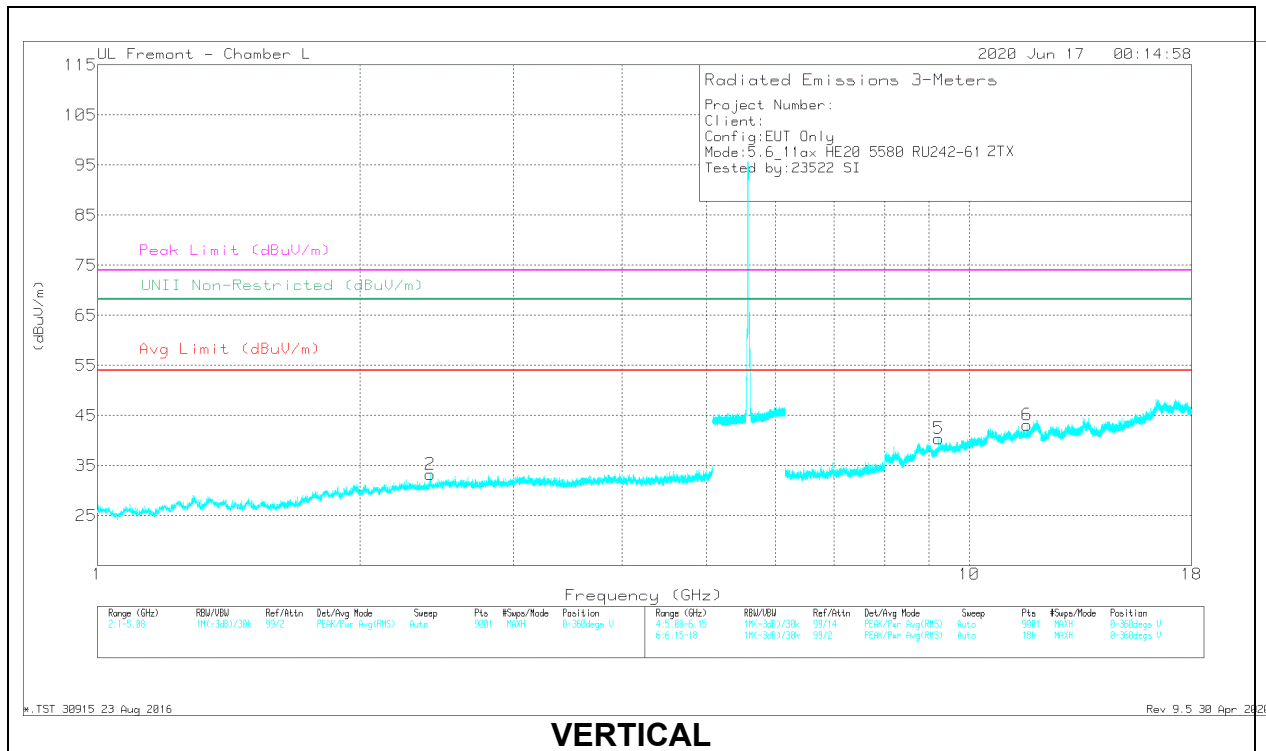


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.45957	41.79	PK-U	32.3	-31	43.09	-	-	-	-	68.2	-25.11	237	338	H
2	2.40874	38.94	PK-U	32	-30.9	40.04	-	-	-	-	68.2	-28.16	237	101	V
3	* 8.06193	31.94	PK-U	35.7	-22.3	45.34	-	-	74	-28.66	-	-	41	101	H
	* 8.06145	20.93	ADR	35.7	-22.3	34.33	54	-19.67	-	-	-	-	41	101	H
4	* 15.76116	31.57	PK-U	40.8	-19.6	52.77	-	-	74	-21.23	-	-	78	101	H
	* 15.76152	20.6	ADR	40.8	-19.5	41.9	54	-12.1	-	-	-	-	78	101	H
6	* 11.66139	30.9	PK-U	38.3	-19.4	49.8	-	-	74	-24.2	-	-	3	101	V
	* 11.66401	19.54	ADR	38.4	-19.5	38.44	54	-15.56	-	-	-	-	3	101	V
5	9.2269	30.35	PK-U	36.3	-20.8	45.85	-	-	-	-	68.2	-22.35	126	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

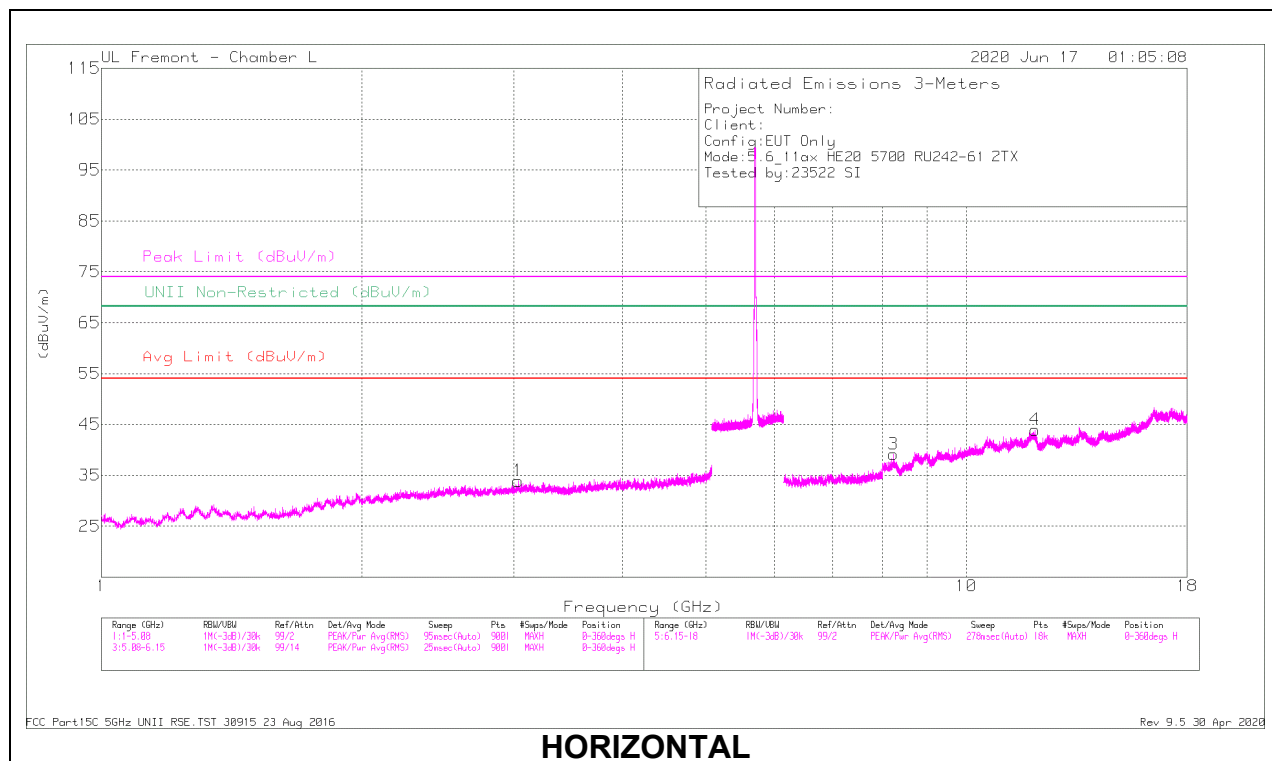

HORIZONTAL

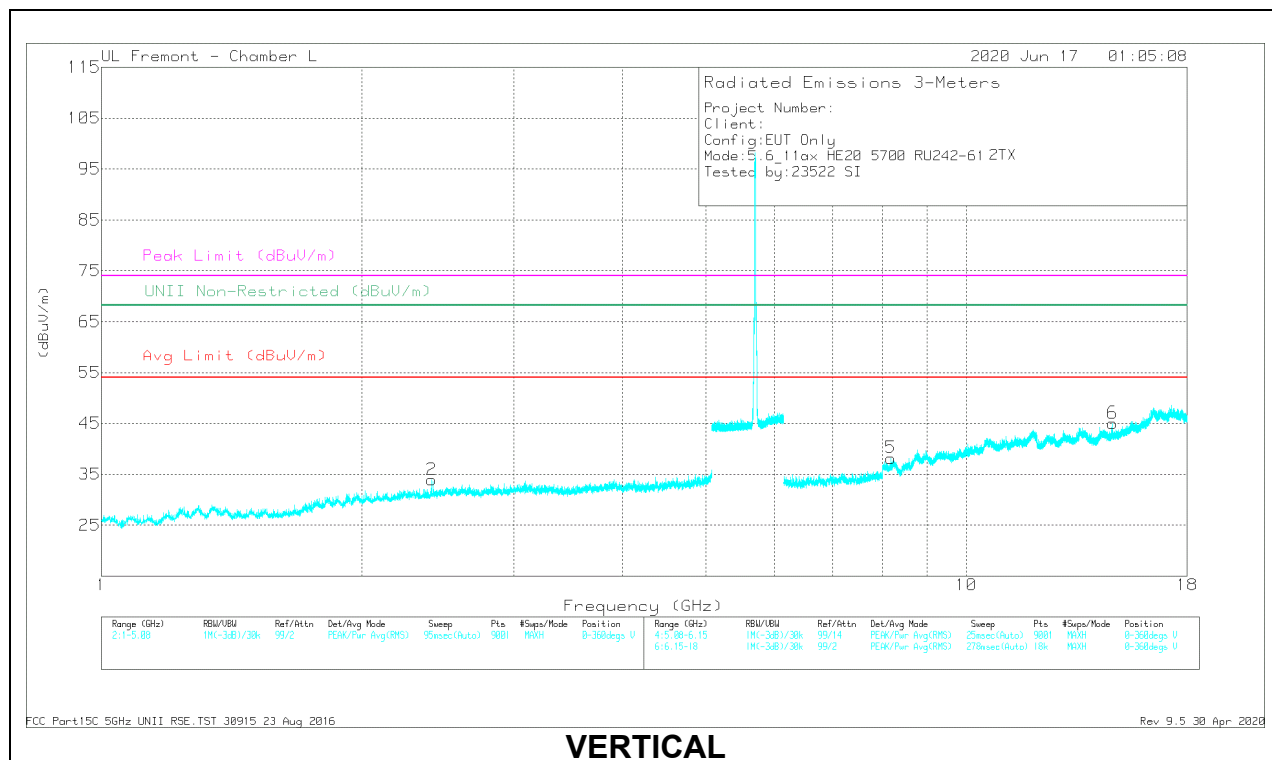


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.03133	38.05	PK-U	32.8	-29.4	41.45	-	-	-	-	68.2	-26.75	52	114	H
2	2.40954	42.14	PK-U	32	-30.9	43.24	-	-	-	-	68.2	-24.96	297	186	V
3	* 8.23414	31.37	PK-U	35.7	-21.5	45.57	-	-	74	-28.43	-	-	166	101	H
	* 8.23334	20.97	ADR	35.8	-21.5	35.27	54	-18.73	-	-	-	-	166	101	H
4	* 12.0135	30.95	PK-U	38.7	-19.8	49.85	-	-	74	-24.15	-	-	59	101	H
	* 12.01659	20.1	ADR	38.7	-19.8	39	54	-15	-	-	-	-	59	101	H
5	* 8.17824	32.07	PK-U	35.8	-22.6	45.27	-	-	74	-28.73	-	-	195	199	V
	* 8.17465	20.92	ADR	35.7	-22.6	34.02	54	-19.98	-	-	-	-	195	199	V
6	14.77014	30.68	PK-U	39.9	-18.9	51.68	-	-	-	-	68.2	-16.52	27	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

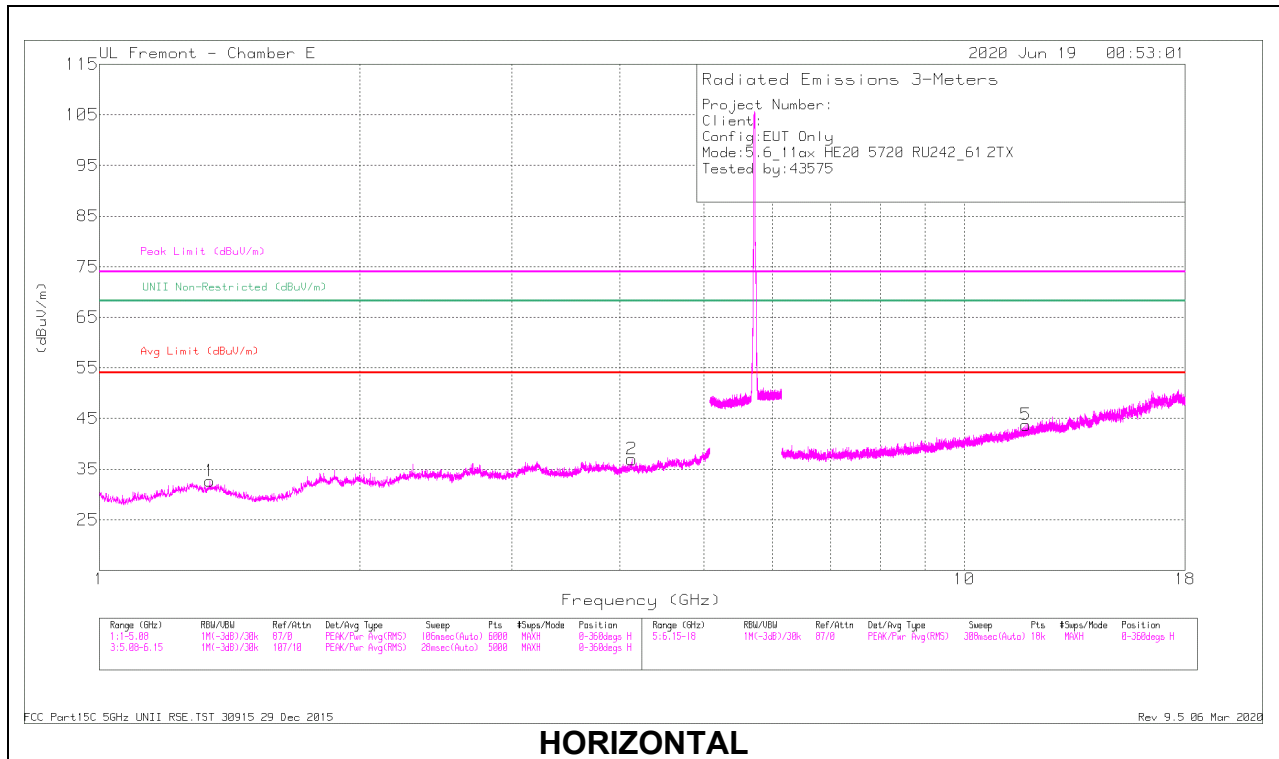

HORIZONTAL

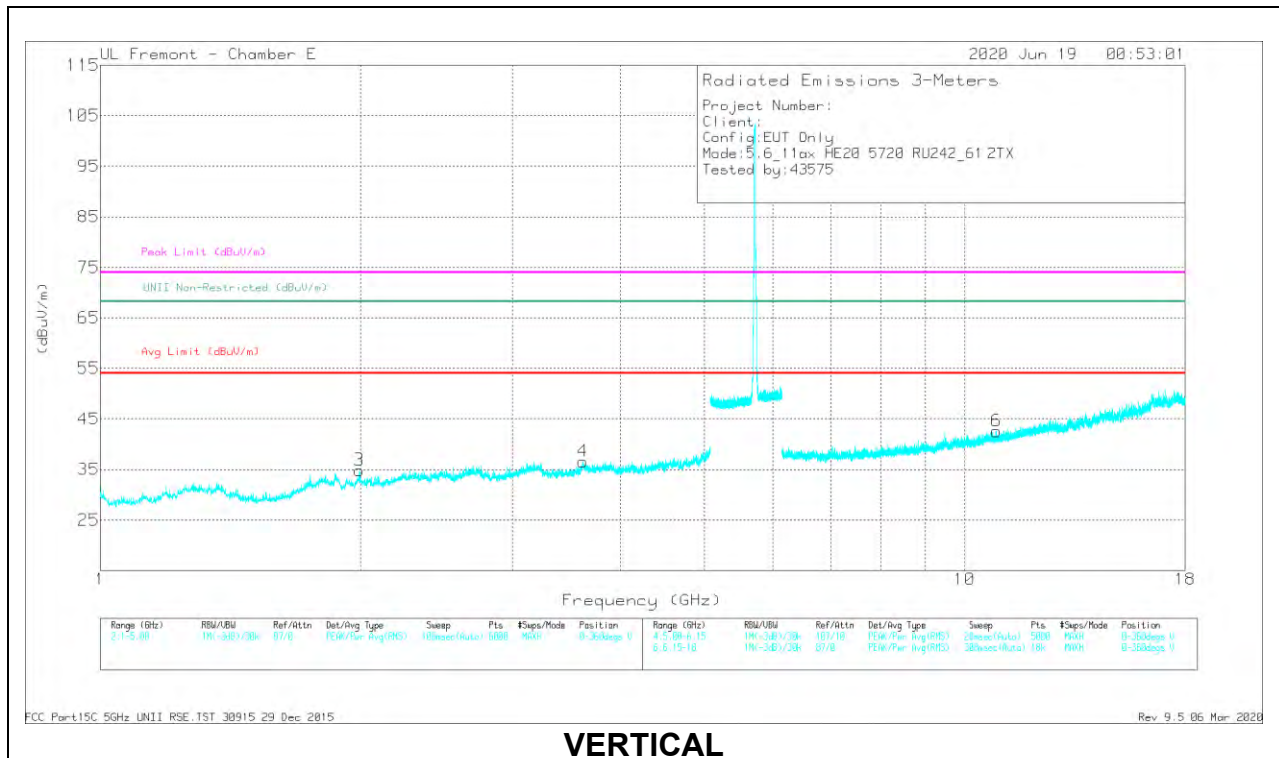

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.34325	44.56	PK-U	29.5	-35.1	38.96	-	-	74	-35.04	-	-	0	199	H
	* 1.34387	32.9	ADR	29.5	-35.2	27.2	54	-26.8	-	-	-	-	0	199	H
2	* 4.12619	41.89	PK-U	33.5	-32.3	43.09	-	-	74	-30.91	-	-	0	101	H
	* 4.12598	30.69	ADR	33.5	-32.3	31.89	54	-22.11	-	-	-	-	0	101	H
4	* 3.61544	43.63	PK-U	33.7	-34.3	43.03	-	-	74	-30.97	-	-	0	199	V
	* 3.61471	32.27	ADR	33.6	-34.3	31.57	54	-22.43	-	-	-	-	0	199	V
5	* 11.77942	35.24	PK-U	38.4	-23.8	49.84	-	-	74	-24.16	-	-	0	199	H
	* 11.78133	24.33	ADR	38.4	-23.8	38.93	54	-15.07	-	-	-	-	0	199	H
6	* 10.88656	36.39	PK-U	37.7	-25.2	48.89	-	-	74	-25.11	-	-	0	199	V
	* 10.88559	25.32	ADR	37.7	-25.2	37.82	54	-16.18	-	-	-	-	0	199	V
3	1.99379	45.78	PK-U	31.7	-35.9	41.58	-	-	-	-	68.2	-26.62	0	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

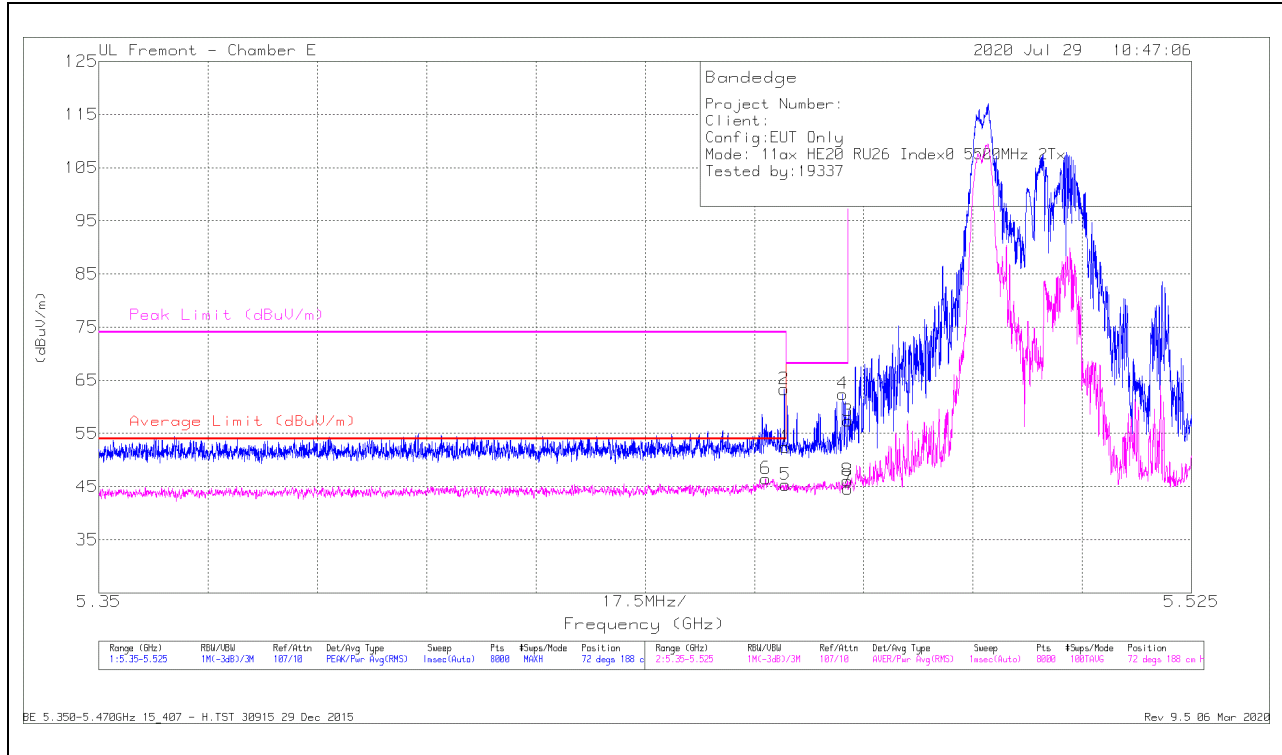

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.45679	33.6	RMS	34.6	-21.7	46.5	54	-7.5	-	-	72	188	H
2	* 5.45976	50.53	Pk	34.5	-21.7	63.33	-	-	74	-10.67	72	188	H
1	* 5.45998	39.64	Pk	34.5	-21.7	52.44	-	-	74	-21.56	72	188	H
5	* 5.45998	32.55	RMS	34.5	-21.7	45.35	54	-8.65	-	-	72	188	H
4	5.4691	49.55	Pk	34.6	-21.7	62.45	-	-	68.2	-5.75	72	188	H
8	5.46989	33.24	RMS	34.6	-21.7	46.14	-	-	-	-	72	188	H
3	5.46998	44.46	Pk	34.6	-21.7	57.36	-	-	68.2	-10.84	72	188	H
7	5.46998	31.71	RMS	34.6	-21.7	44.61	-	-	-	-	72	188	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection