


**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

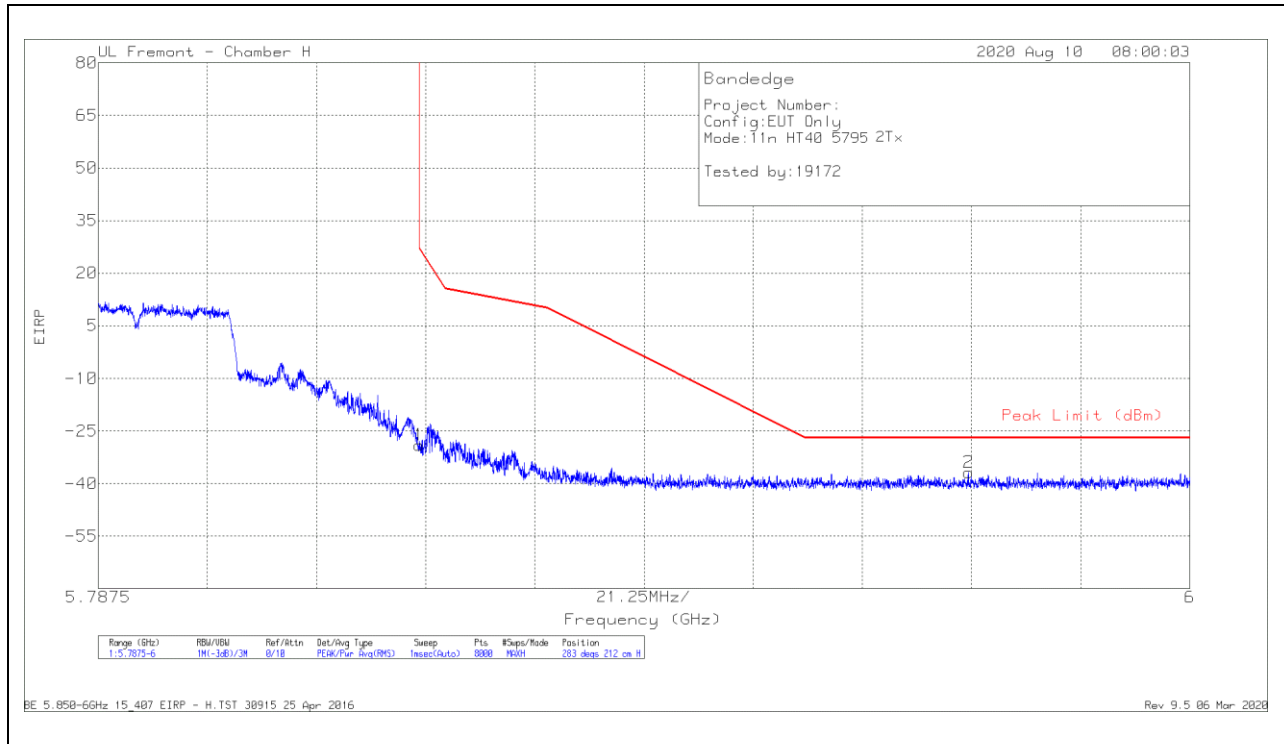

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/CbI/Fitr/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-55.08	Pk	35	-20.7	11.8	0	-28.98	26.98	-55.96	283	212	H
2	5.95691	-63.57	Pk	35.1	-20.2	11.8	0	-36.87	-27	-9.87	283	212	H

Pk - Peak detector

### VERTICAL RESULT

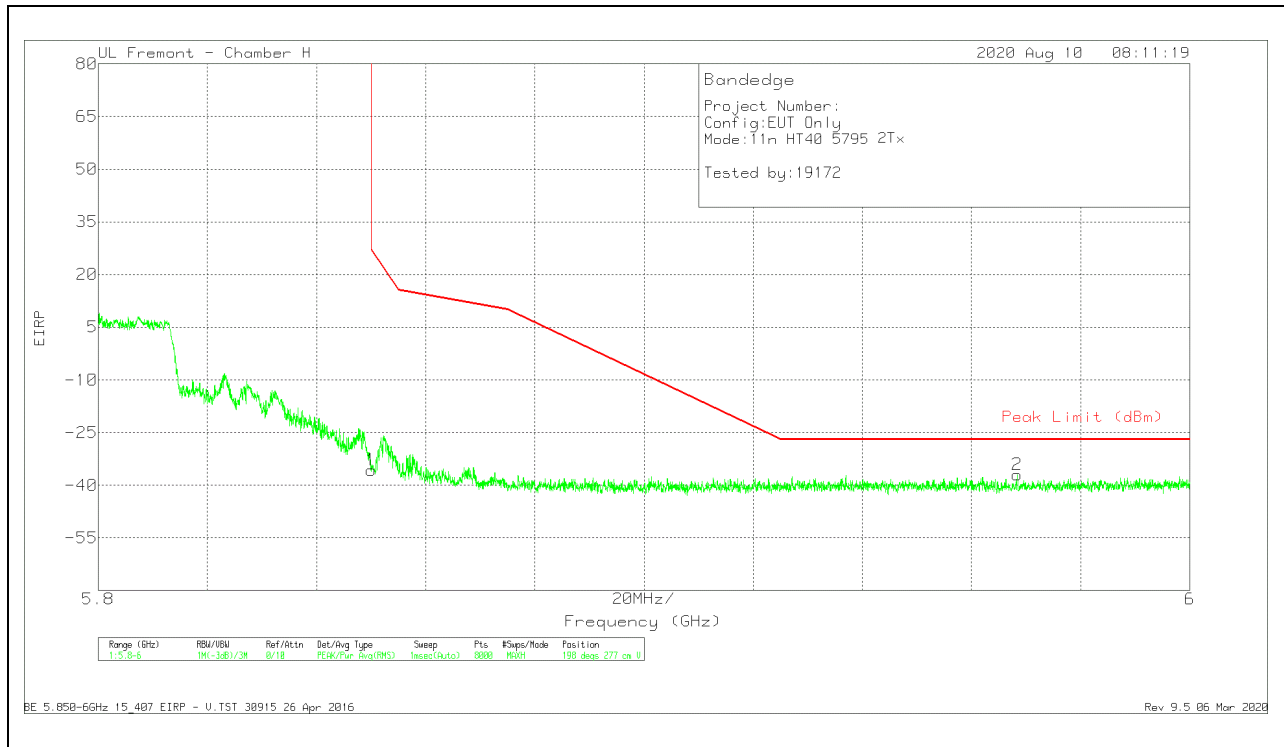


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cb1/Filt/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-61.73	Pk	35	-20.7	11.8	0	-35.63	26.99	-62.62	198	277	V
2	5.9684	-63.7	Pk	35.2	-20.3	11.8	0	-37	-27	-10	198	277	V


Pk - Peak detector

# HARMONICS AND SPURIOUS EMISSIONS

## LOW CHANNEL RESULTS

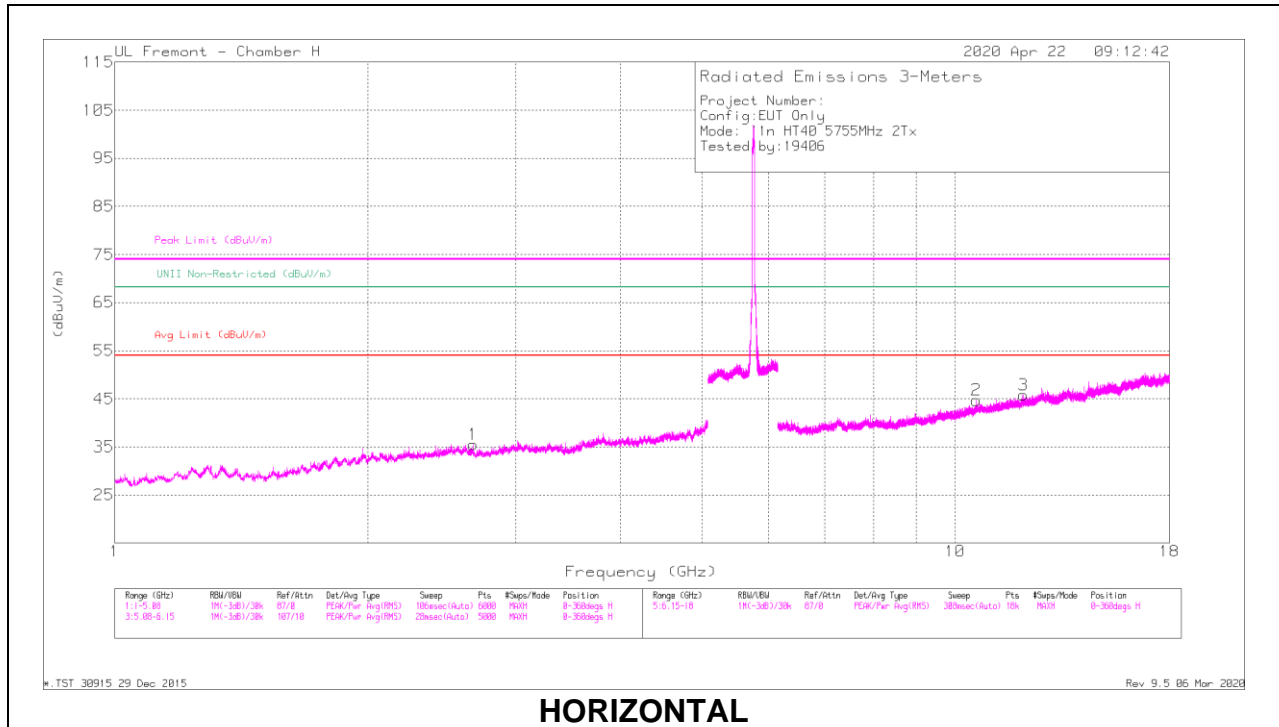

**HORIZONTAL**

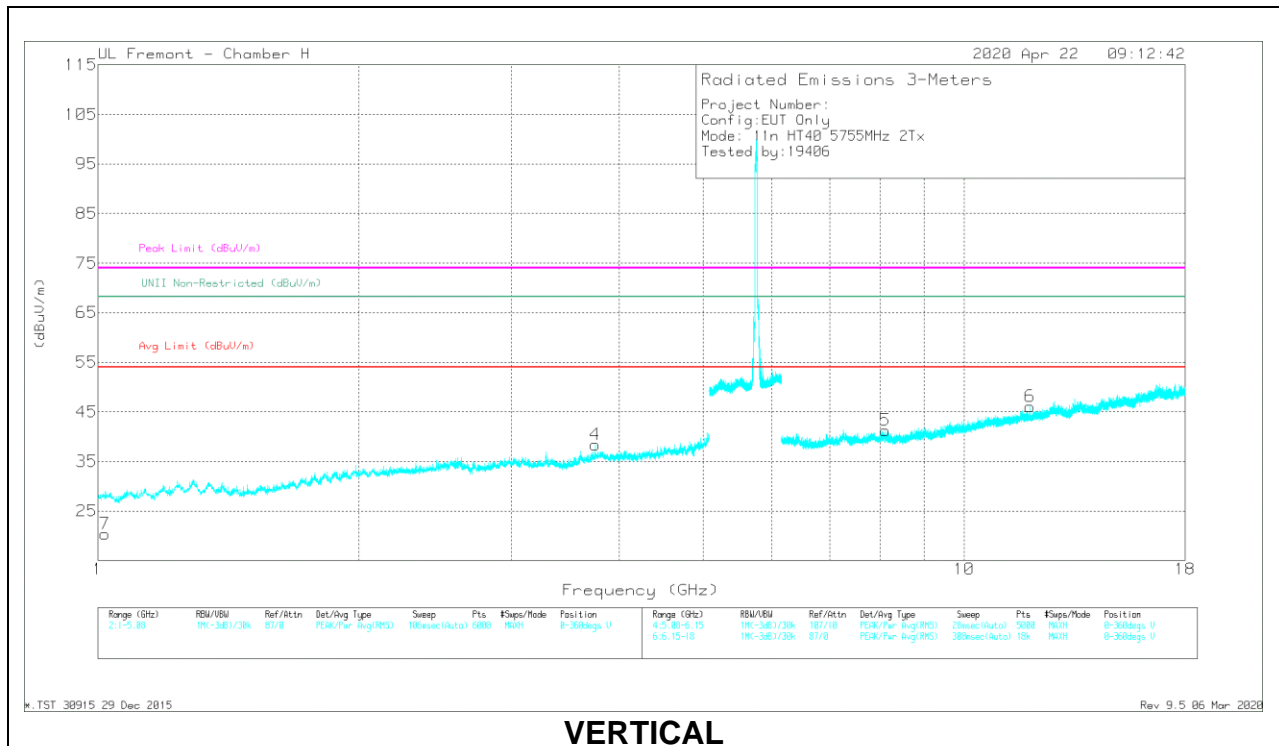


**VERTICAL**

**RADIATED EMISSIONS**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/Paid (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.67174	43.05	PK-U	32.1	-32.9	0	42.25	-	-	74	-31.75	-	-	152	152	H
	* 2.67119	31.16	AD-R	32.1	-32.9	0.9	31.26	54	-22.74	-	-	-	-	152	152	H
4	* 3.75104	43.51	PK-U	33.4	-32.3	0	44.61	-	-	74	-29.39	-	-	258	154	V
	* 3.75412	31.72	AD-R	33.4	-32.3	0.9	33.72	54	-20.28	-	-	-	-	258	154	V
7	* 1.01939	44.93	PK-U	27.3	-35.9	0	36.33	-	-	74	-37.67	-	-	164	230	V
	* 1.02015	32.96	AD-R	27.3	-35.9	0.9	25.26	54	-28.74	-	-	-	-	164	230	V
2	* 10.6055	37.49	PK-U	37.6	-24.4	0	50.69	-	-	74	-23.31	-	-	245	169	H
	* 10.6072	26.54	AD-R	37.6	-24.4	0.9	40.64	54	-13.36	-	-	-	-	245	169	H
3	* 12.0628	36.84	PK-U	38.9	-23.9	0	51.84	-	-	74	-22.16	-	-	187	232	H
	* 12.0601	25.84	AD-R	38.8	-23.9	0.9	41.64	54	-12.36	-	-	-	-	187	232	H
5	* 8.10868	38.65	PK-U	36.1	-26.9	0	47.85	-	-	74	-26.15	-	-	258	299	V
	* 8.10845	27.24	AD-R	36.1	-26.9	0.9	37.34	54	-16.66	-	-	-	-	258	299	V
6	* 11.9151	36.9	PK-U	38.6	-24	0	51.5	-	-	74	-22.5	-	-	134	274	V
	* 11.9164	26.15	AD-R	38.6	-24	0.9	41.65	54	-12.35	-	-	-	-	134	274	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL RESULTS

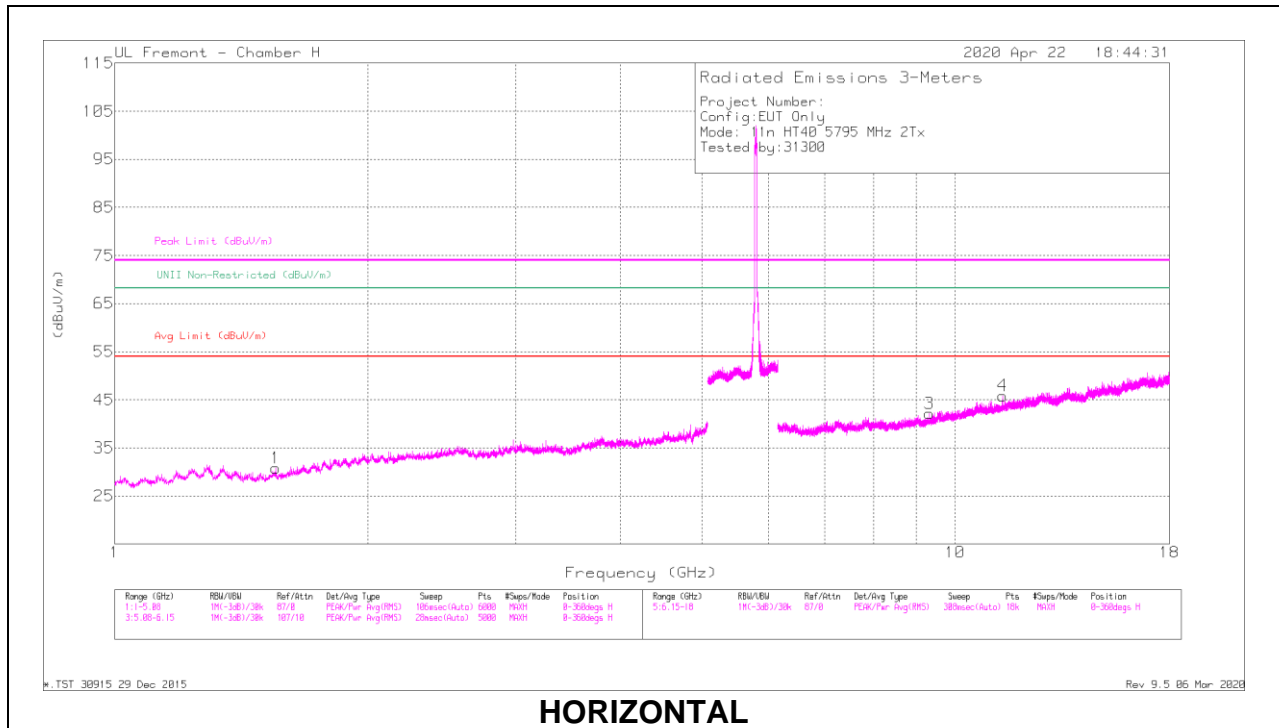

**HORIZONTAL**

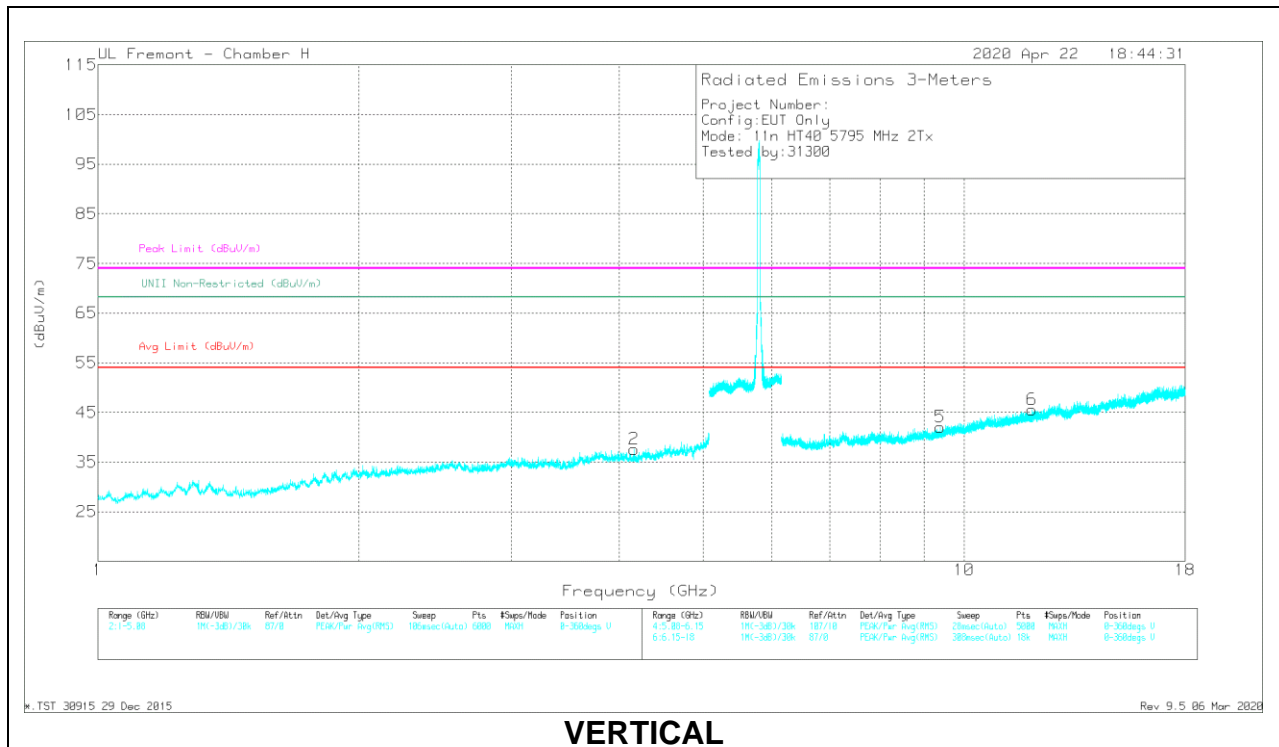

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/Paid (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.55416	43.8	PK-U	28	-34.4	0	37.4	-	-	74	-36.6	-	-	5	201	H
	1.55367	31.64	AD-R	28	-34.4	0.9	26.14	54	-27.86	-	-	-	-	5	201	H
2	* 4.15498	43.21	PK-U	33.5	-32.2	0	44.51	-	-	74	-29.49	-	-	226	101	V
	4.1576	30.86	AD-R	33.5	-32.1	0.9	33.16	54	-20.84	-	-	-	-	226	101	V
3	* 9.31699	37.67	PK-U	36.5	-25.6	0	48.57	-	-	74	-25.43	-	-	129	200	H
	9.32031	25.99	AD-R	36.5	-25.6	0.9	37.79	54	-16.21	-	-	-	-	129	200	H
4	* 11.4026	37.24	PK-U	38.1	-23.8	0	51.54	-	-	74	-22.46	-	-	254	101	H
	11.4013	25.32	AD-R	38.1	-23.8	0.9	40.52	54	-13.48	-	-	-	-	254	101	H
5	* 9.39507	37.26	PK-U	36.5	-25.4	0	48.36	-	-	74	-25.64	-	-	336	101	V
	9.395	25.79	AD-R	36.5	-25.4	0.9	37.79	54	-16.21	-	-	-	-	336	101	V
6	* 11.976	36.67	PK-U	38.7	-24	0	51.37	-	-	74	-22.63	-	-	230	200	V
	11.9765	25.35	AD-R	38.7	-24	0.9	40.95	54	-13.05	-	-	-	-	230	200	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 AD-R - U-NII AD primary method, RMS average

1.1.21. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz Band

ANTENNA 6

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

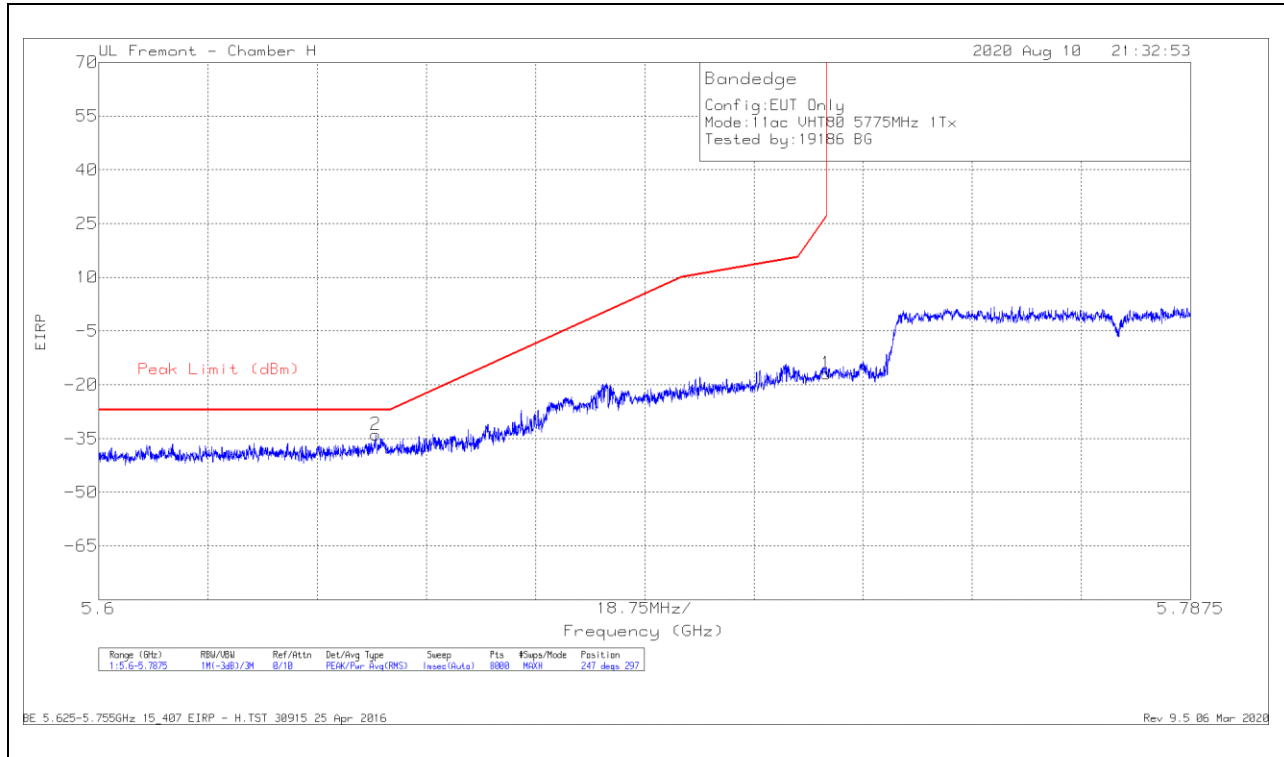

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64756	-59.83	Pk	35.1	-21	11.8	0	-33.93	-27	-6.93	247	297	H
1	5.72498	-42.52	Pk	35	-21.1	11.8	0	-16.82	26.96	-43.78	247	297	H

Pk - Peak detector

### VERTICAL RESULT

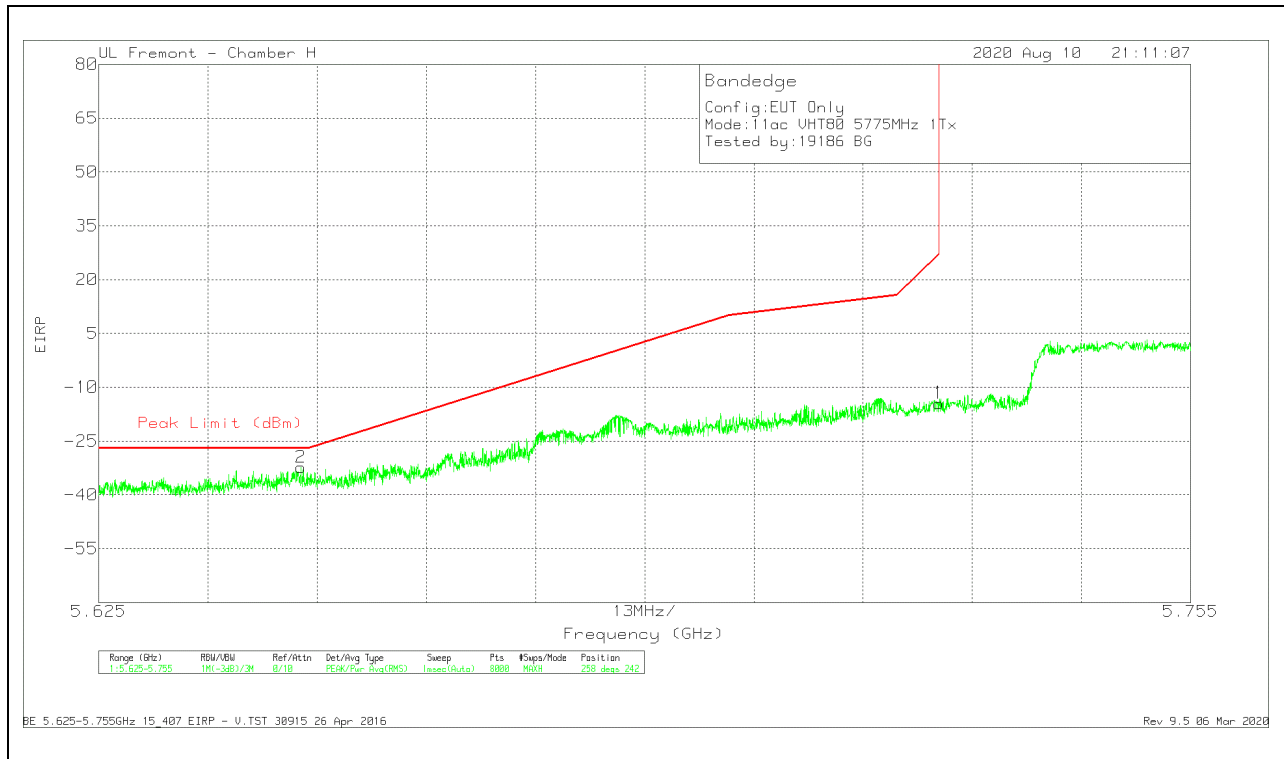


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cb/Filt/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64907	-58.23	Pk	35.1	-21	11.8	0	-32.33	-27	-5.33	258	242	V
1	5.725	-40.18	Pk	35	-21.1	11.8	0	-14.48	27	-41.48	258	242	V

Pk - Peak detector



**BANDEDGE (CHANNEL 155 HIGH EDGE)**


**HORIZONTAL RESULT**

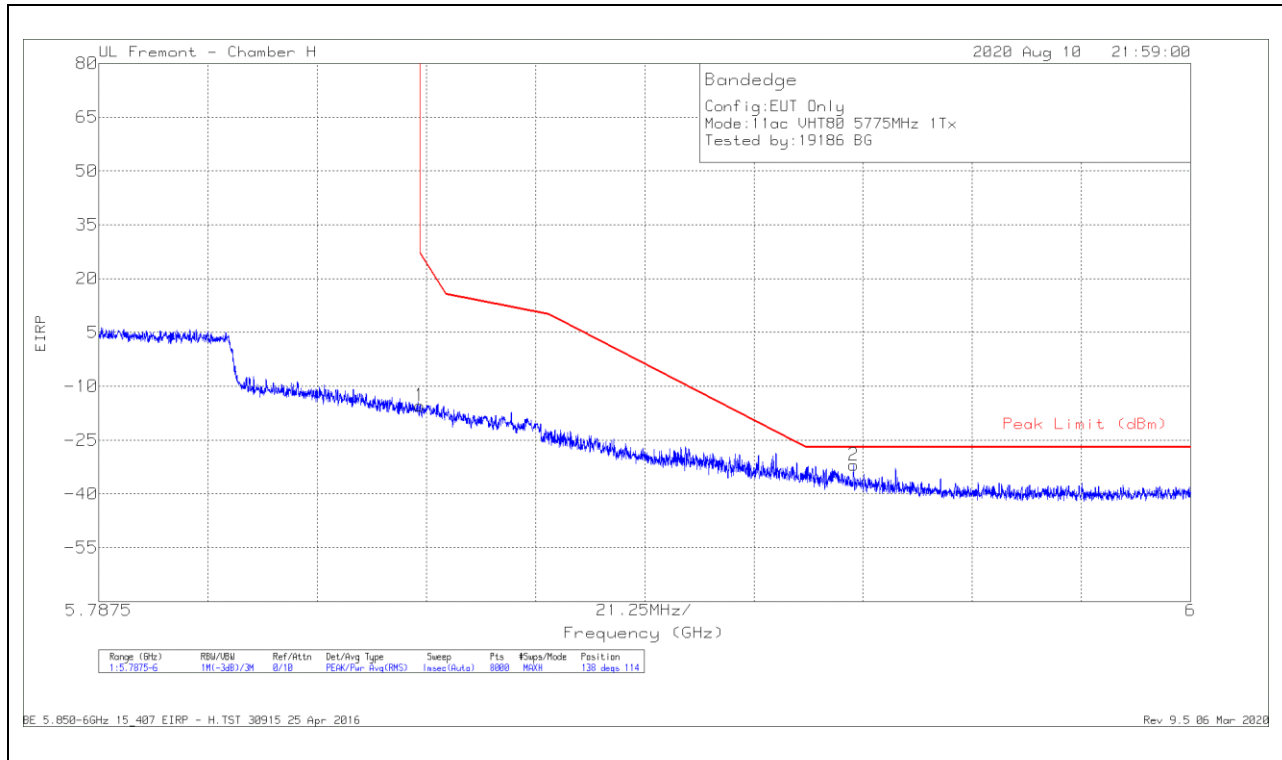

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Chl/Filtr/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-41.47	PK	35	-20.7	11.8	0	-15.37	26.98	-42.35	138	114	H
2	5.93438	-58.34	PK	35.1	-20.5	11.8	0	-31.94	-27	-4.94	138	114	H

Pk - Peak detector

### VERTICAL RESULT

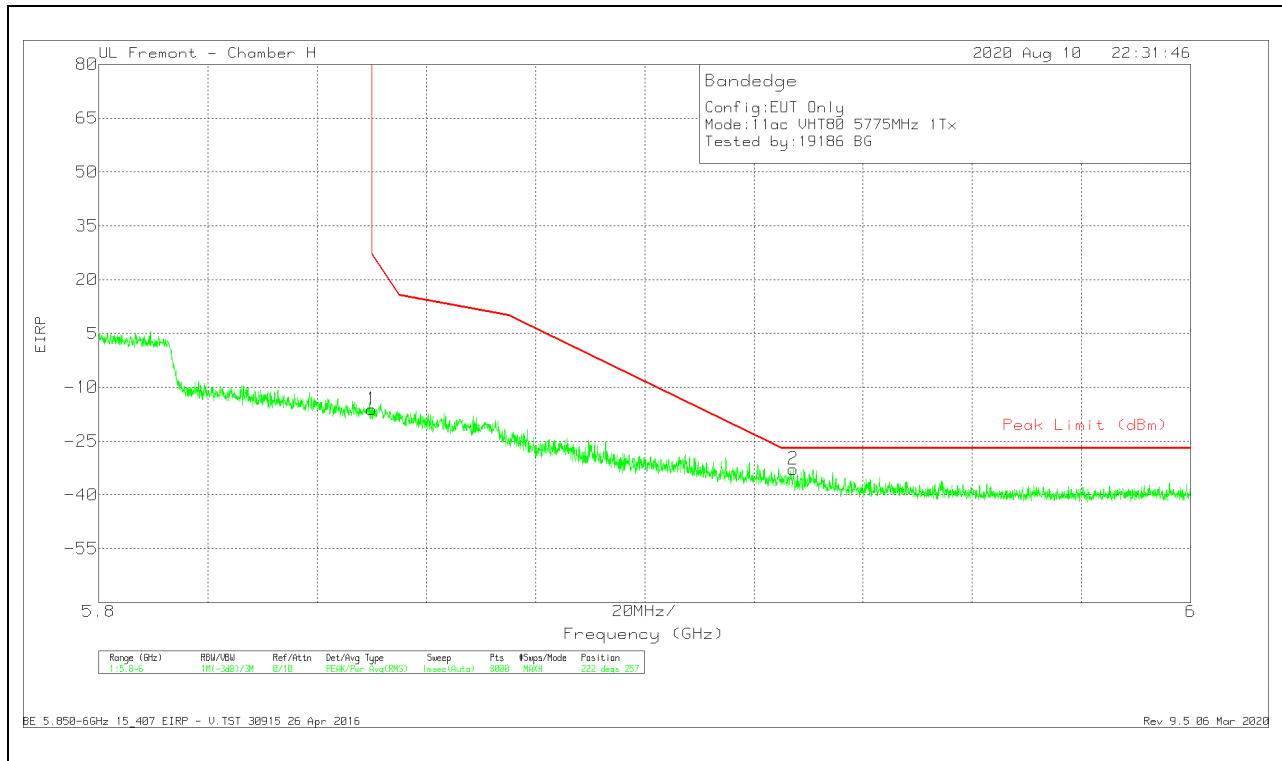


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-42.24	Pk	35	-20.7	11.8	0	-16.14	26.99	-43.13	222	257	V
2	5.92719	-59.28	Pk	35.1	-20.4	11.8	0	-32.78	-27	-5.78	222	257	V

Pk - Peak detector

**ANTENNA 5**

**BANDEDGE (CHANNEL 155 LOW EDGE)**


**HORIZONTAL RESULT**

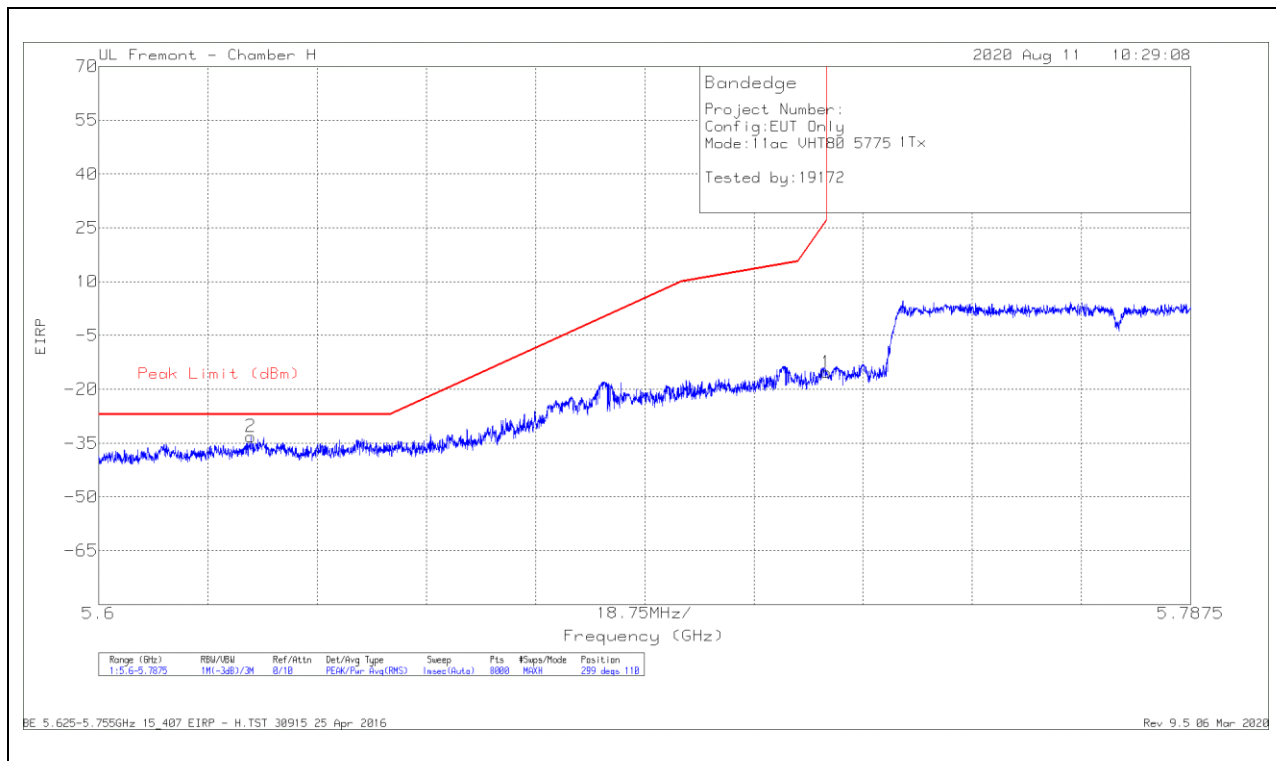

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT863 (dB/m)	Amp/Cb/Filt/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62609	-59.1	Pk	35.2	-21.1	11.8	0	-33.2	-27	-6.2	299	110	H
1	5.72498	-40.99	Pk	35	-21.1	11.8	0	-15.29	26.96	-42.25	299	110	H

Pk - Peak detector

### VERTICAL RESULT

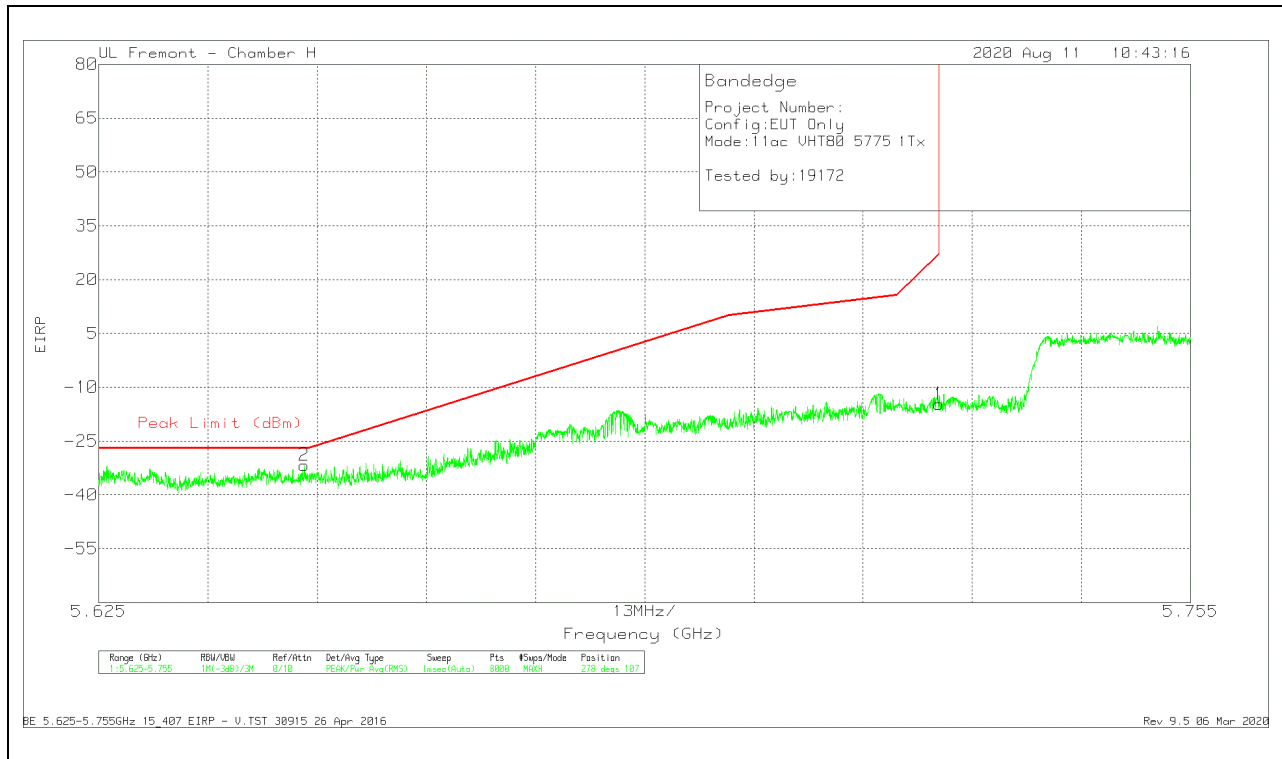


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cb/Filt/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64946	-57.65	Pk	35.1	-21	11.8	0	-31.75	-27	-4.75	278	107	V
1	5.725	-40.4	Pk	35	-21.1	11.8	0	-14.7	27	-41.7	278	107	V

Pk - Peak detector

**BANDEDGE (CHANNEL 155 HIGH EDGE)**


**HORIZONTAL RESULT**

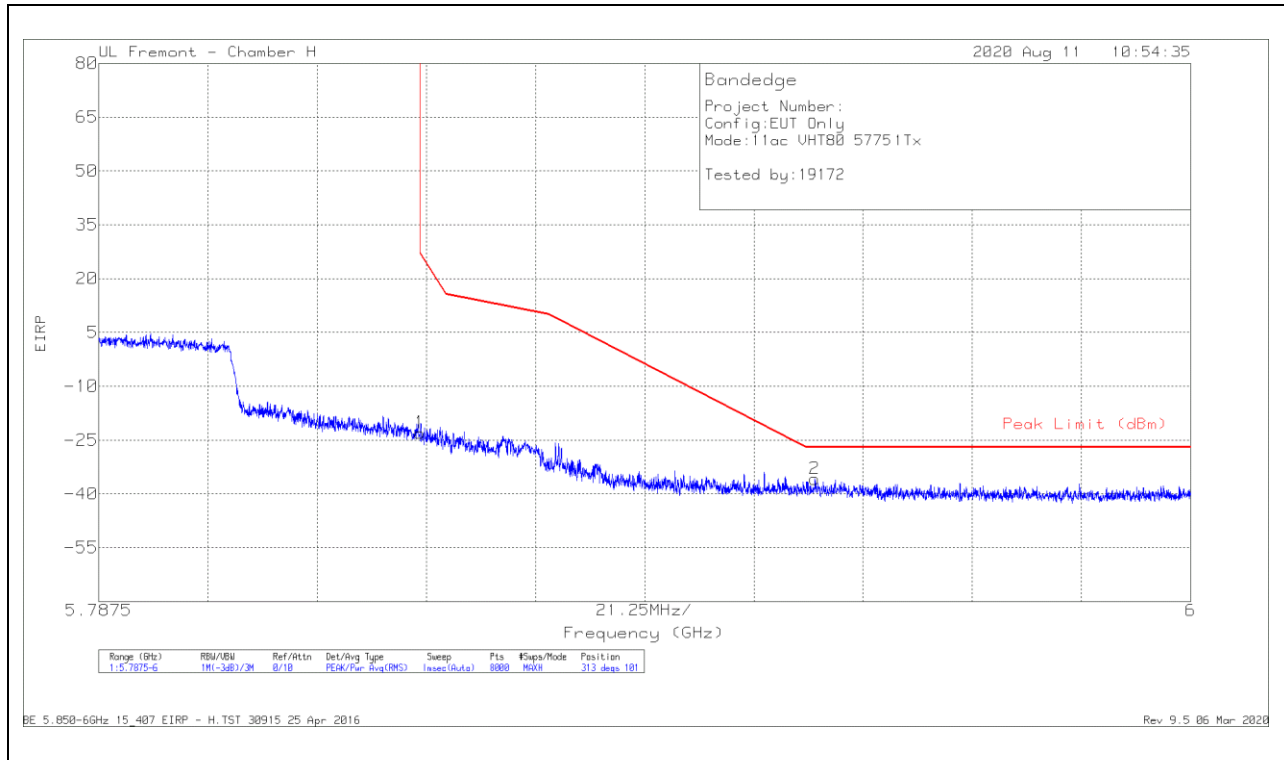

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Chl/Filtr/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-49.09	Pk	35	-20.7	11.8	0	-22.99	26.98	-49.97	313	101	H
2	5.92684	-62.31	Pk	35.1	-20.4	11.8	0	-35.81	-27	-8.81	313	101	H

Pk - Peak detector

### VERTICAL RESULT

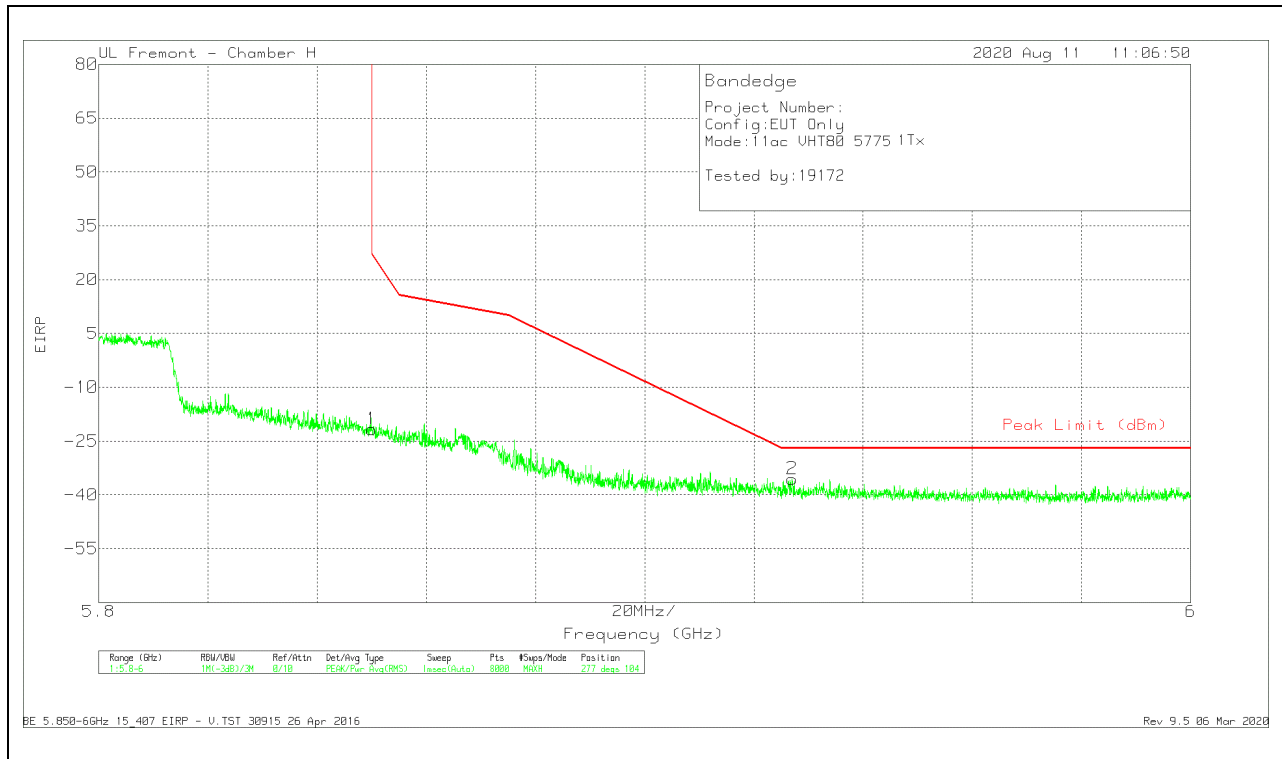


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-47.79	Pk	35	-20.7	11.8	0	-21.69	26.99	-48.68	277	104	V
2	5.92702	-62.04	Pk	35.1	-20.4	11.8	0	-35.54	-27	-8.54	277	104	V

Pk - Peak detector

**2TX ANTENNA 6 + ANTENNA 5 CDD MODE**

**BANDEDGE (CHANNEL 155 LOW EDGE)**


**HORIZONTAL RESULT**

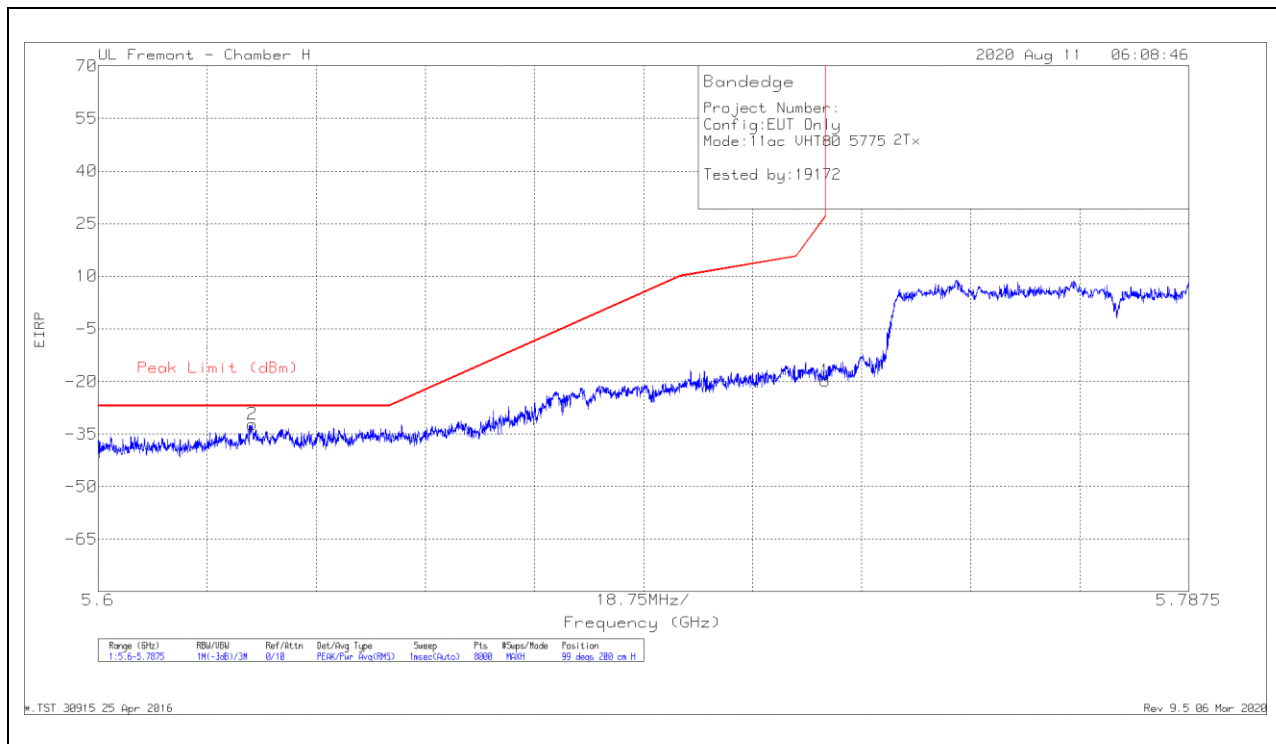

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cb/Filtr/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62651	-58.14	Pk	35.2	-21.1	11.8	0	-32.24	-27	-5.24	99	200	H
1	5.72498	-45.53	Pk	35	-21.1	11.8	0	-19.83	26.96	-46.79	99	200	H

Pk - Peak detector

### VERTICAL RESULT

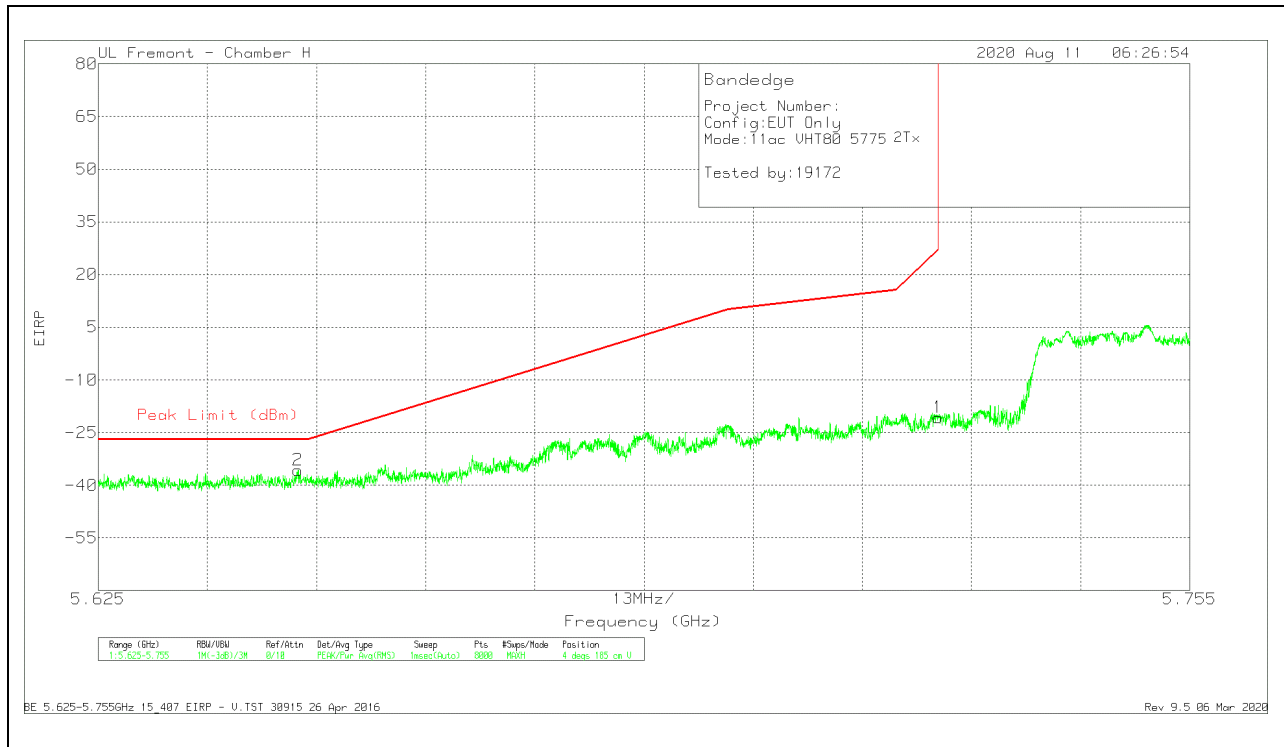


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cb/Filt/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64881	-61.57	Pk	35.1	-21	11.8	0	-35.67	-27	-8.67	4	185	V
1	5.725	-46.48	Pk	35	-21.1	11.8	0	-20.78	27	-47.78	4	185	V

Pk - Peak detector



**BANDEDGE (CHANNEL 155 HIGH EDGE)**


**HORIZONTAL RESULT**

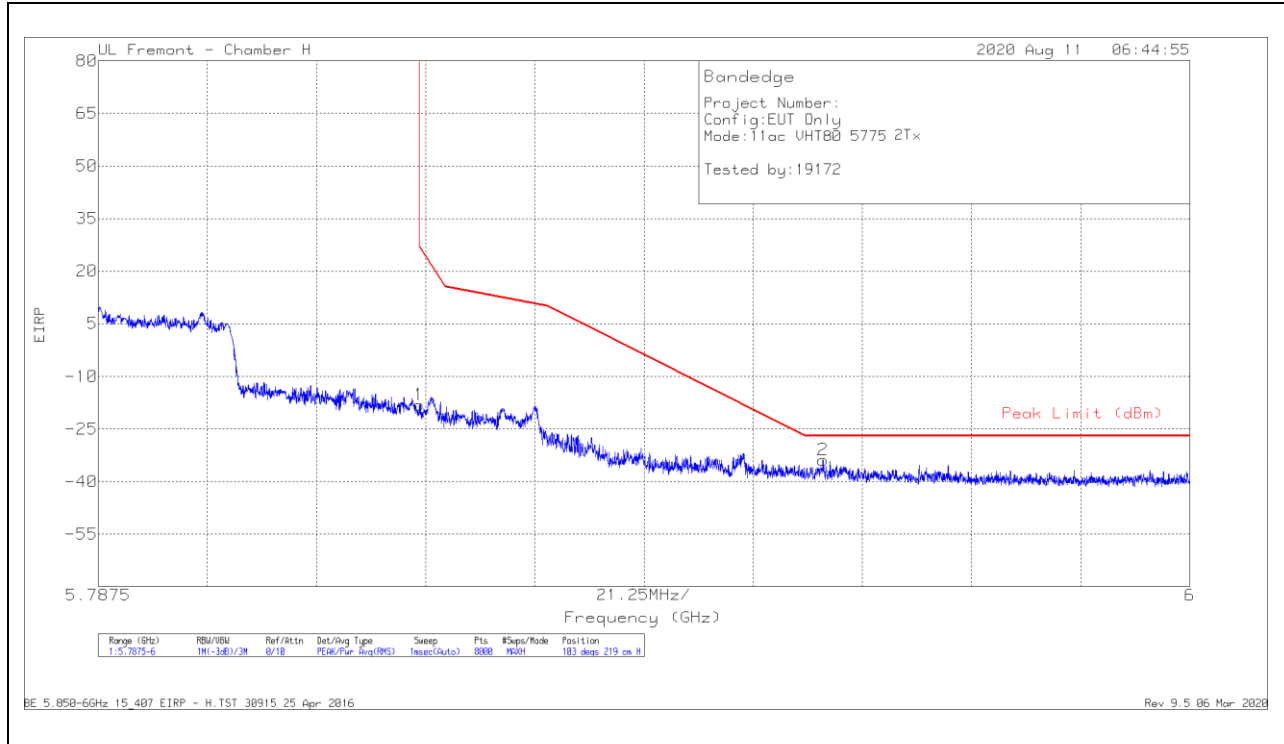

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cb/Filt/P ad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-44.2	Pk	35	-20.7	11.8	0	-18.1	26.98	-45.08	103	219	H
2	5.92859	-60.35	Pk	35.1	-20.4	11.8	0	-33.85	-27	-6.85	103	219	H

Pk - Peak detector

### VERTICAL RESULT

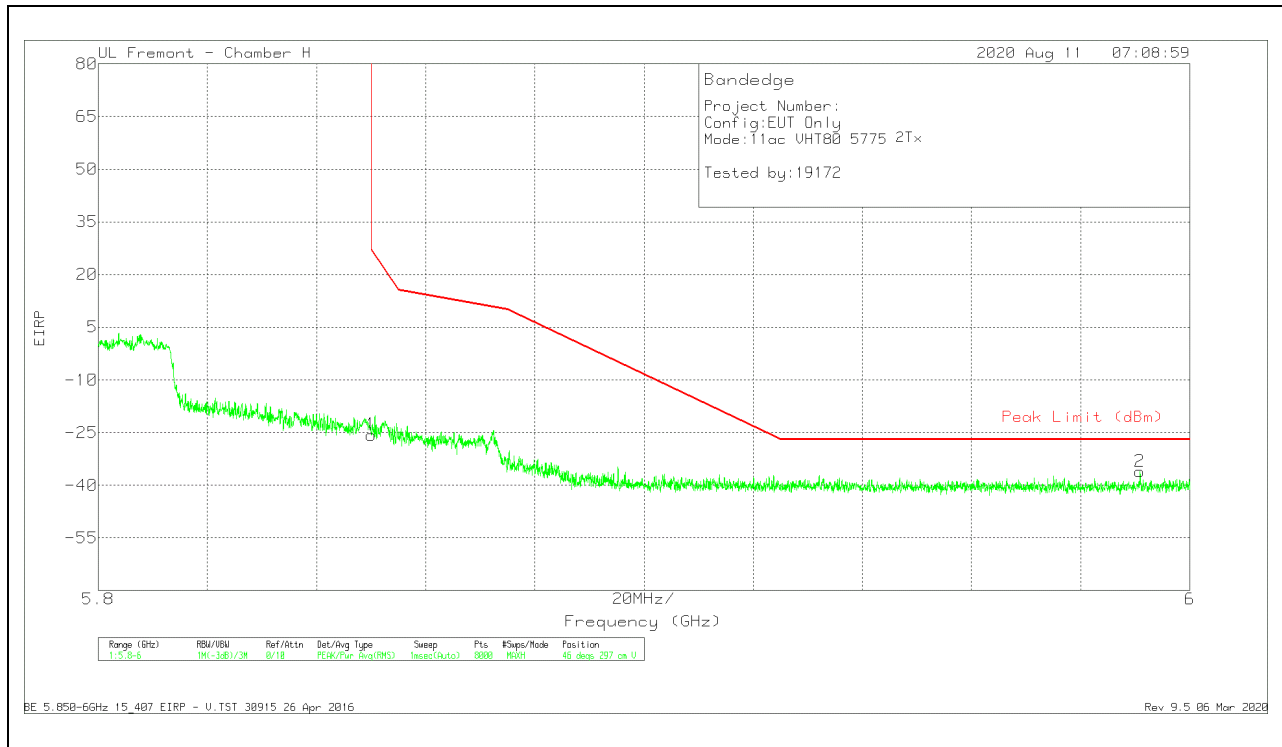


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cb/Filt/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-51.73	Pk	35	-20.7	11.8	0	-25.63	26.99	-52.62	46	297	V
2	5.99087	-62.8	Pk	35.2	-20.3	11.8	0	-36.1	-27	-9.1	46	297	V


Pk - Peak detector

# HARMONICS AND SPURIOUS EMISSIONS

## MID CHANNEL RESULTS

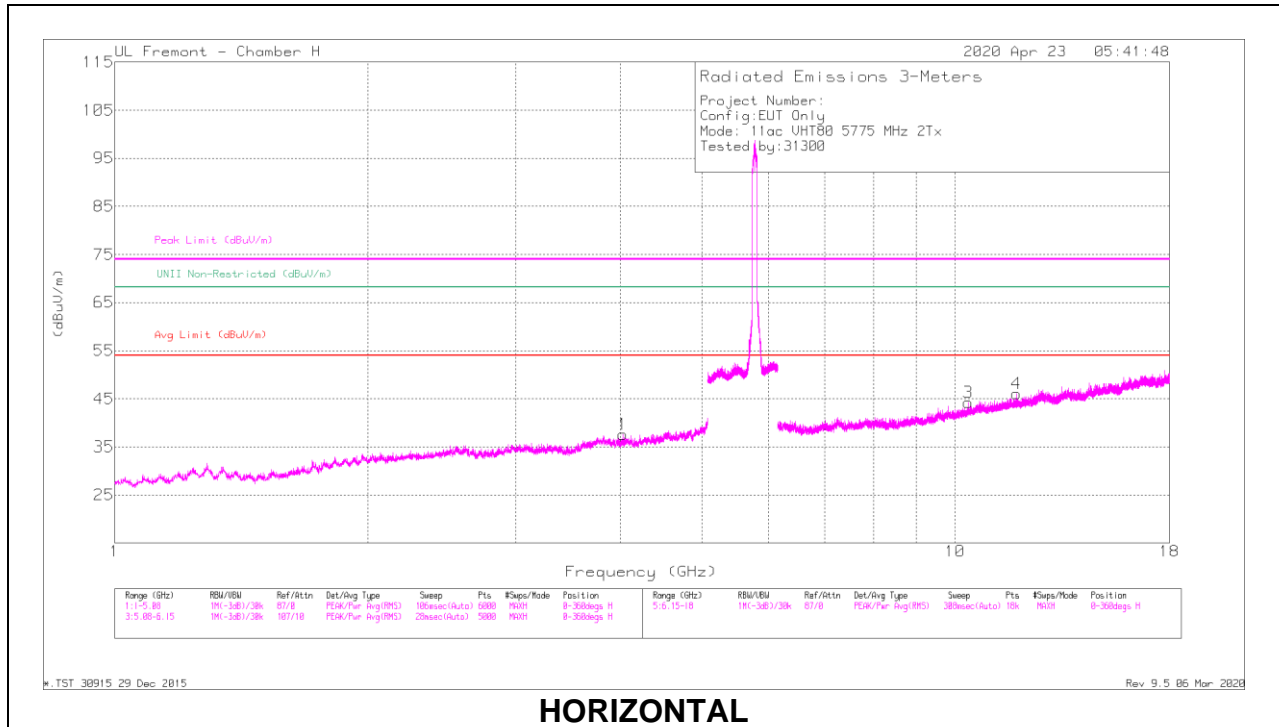

**HORIZONTAL**

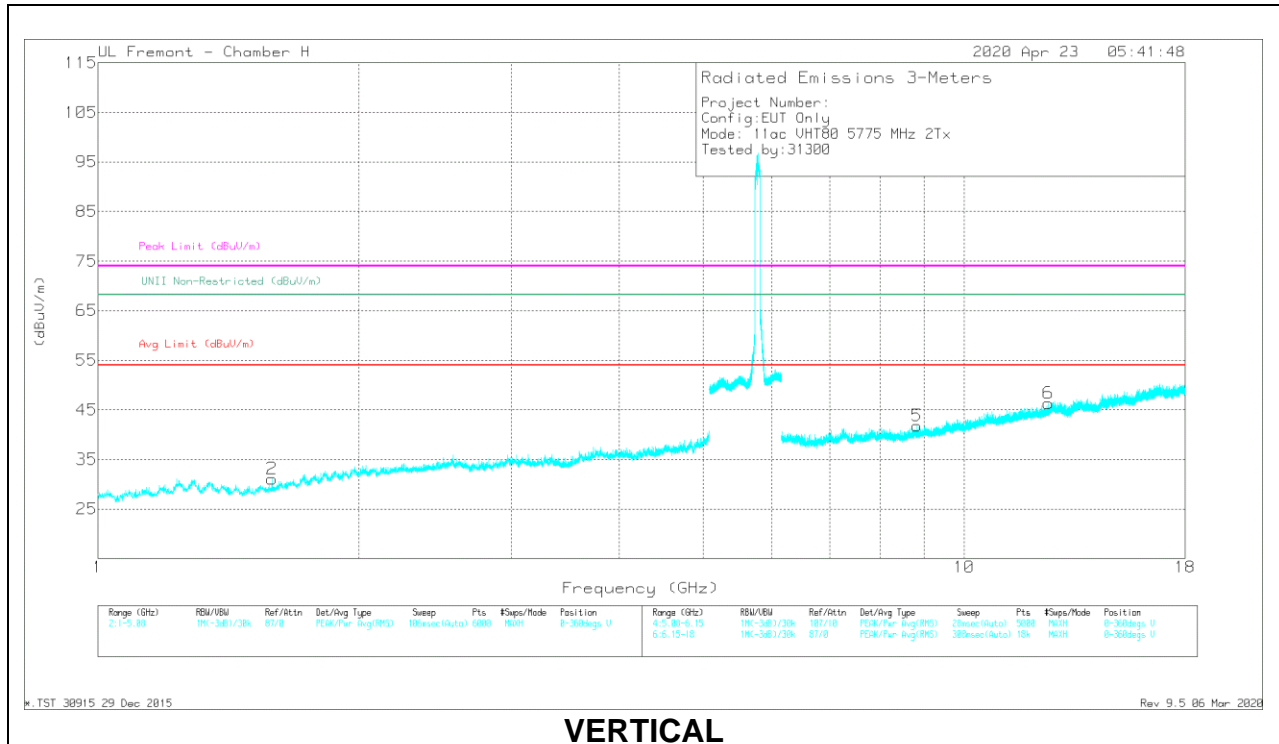

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Path (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.02465	43.32	PK-U	33.5	-32.1	0	44.72	-	-	74	-29.28	-	-	138	275	H
	* 4.02758	31.3	ADR	33.5	-32.1	1.29	33.99	54	-20.01	-	-	-	-	138	275	H
2	* 1.588	43.64	PK-U	28	-34.3	0	37.34	-	-	74	-36.66	-	-	355	199	V
	* 1.58688	31.57	ADR	28	-34.3	1.29	26.56	54	-27.44	-	-	-	-	355	199	V
4	* 11.8420	37.43	PK-U	38.5	-24	0	51.93	-	-	74	-22.07	-	-	122	101	H
	* 11.8413	25.62	ADR	38.5	-24	1.29	41.41	54	-12.59	-	-	-	-	122	101	H
6	* 12.5162	37.16	PK-U	39.4	-24.1	0	52.46	-	-	74	-21.54	-	-	301	249	V
	* 12.517	25.5	ADR	39.4	-24.1	1.29	42.09	54	-11.91	-	-	-	-	301	249	V
5	8.81728	37.98	PK-U	36.2	-26.2	0	47.98	-	-	-	-	68.2	-20.22	141	200	V
3	10.37726	37.22	PK-U	37.4	-24.6	0	50.02	-	-	-	-	68.2	-18.18	315	199	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

**1.1.22. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.8 GHz BAND**

**ANTENNA 6 – 242 Tones, RU Index 61**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

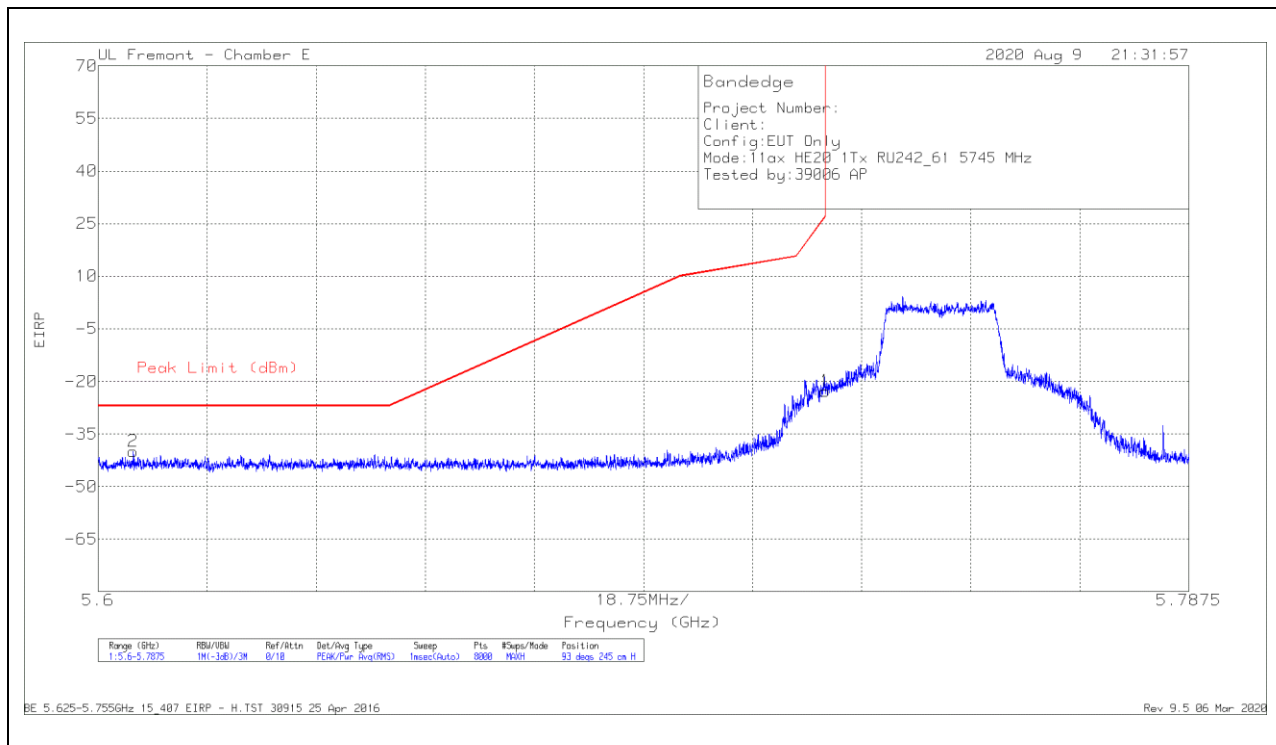

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.60602	-64.59	Pk	34.7	-21.8	11.8	-39.89	-27	-12.89	93	245	H
1	5.72498	-48.1	Pk	34.7	-21.2	11.8	-22.8	26.96	-49.76	93	245	H

Pk - Peak detector

### VERTICAL RESULT

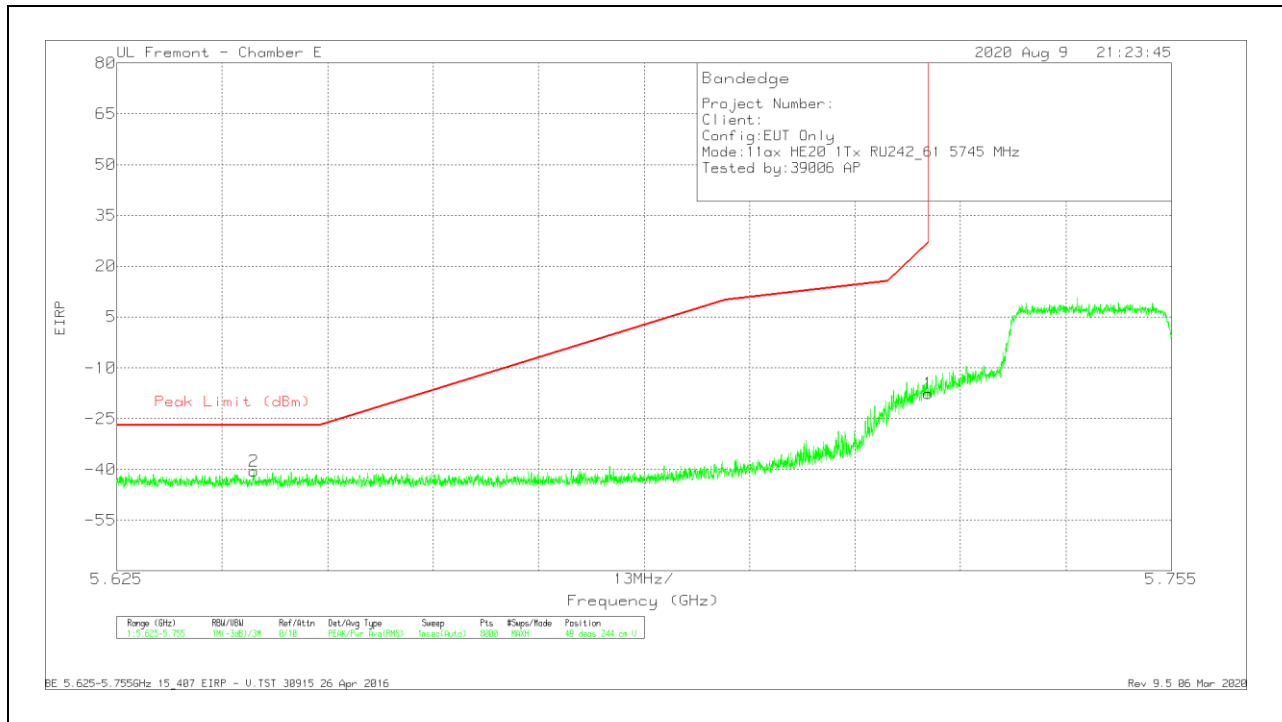


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbi/Filtr/PA d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64189	-65.57	Pk	34.8	-21.6	11.8	-40.57	-27	-13.57	49	244	V
1	5.725	-42.89	Pk	34.7	-21.2	11.8	-17.59	27	-44.59	49	244	V

Pk - Peak detector

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

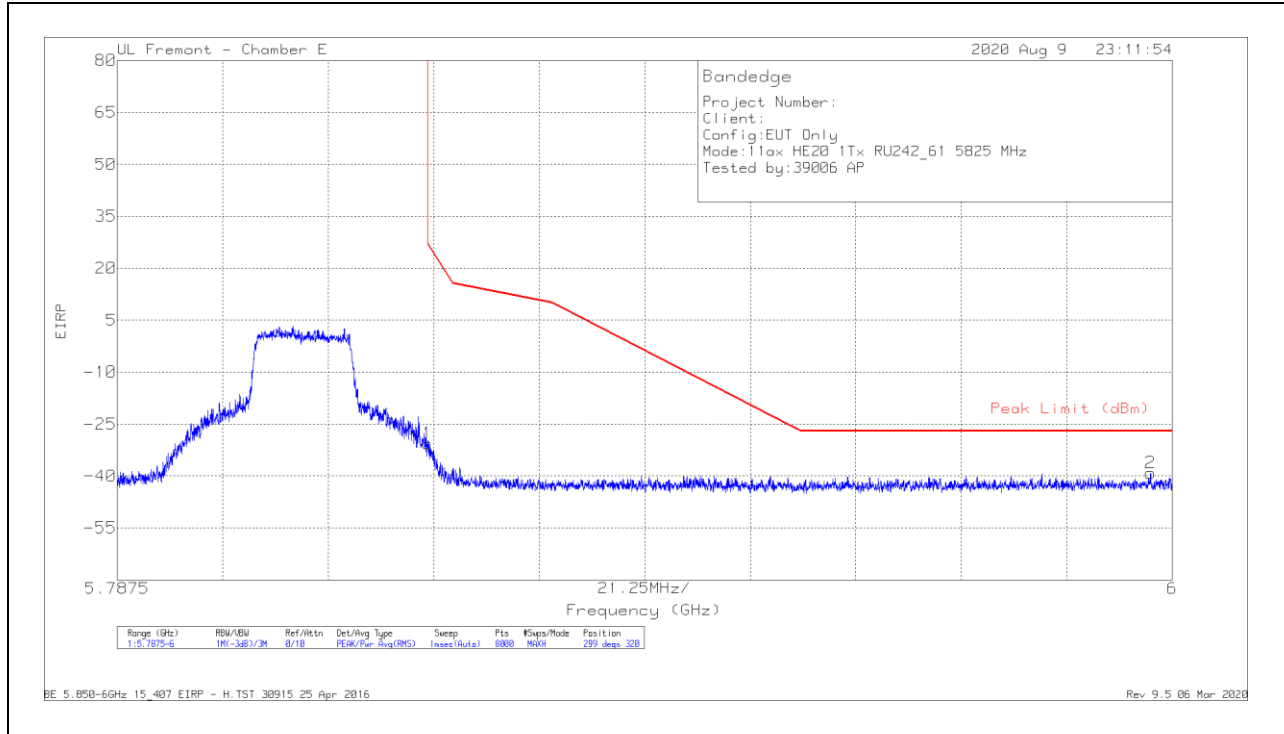

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-56.58	Pk	34.9	-20.7	11.8	-30.58	26.98	-57.56	299	320	H
2	5.99562	-65.5	Pk	35.2	-20.6	11.8	-39.1	-27	-12.1	299	320	H

Pk - Peak detector

### VERTICAL RESULT

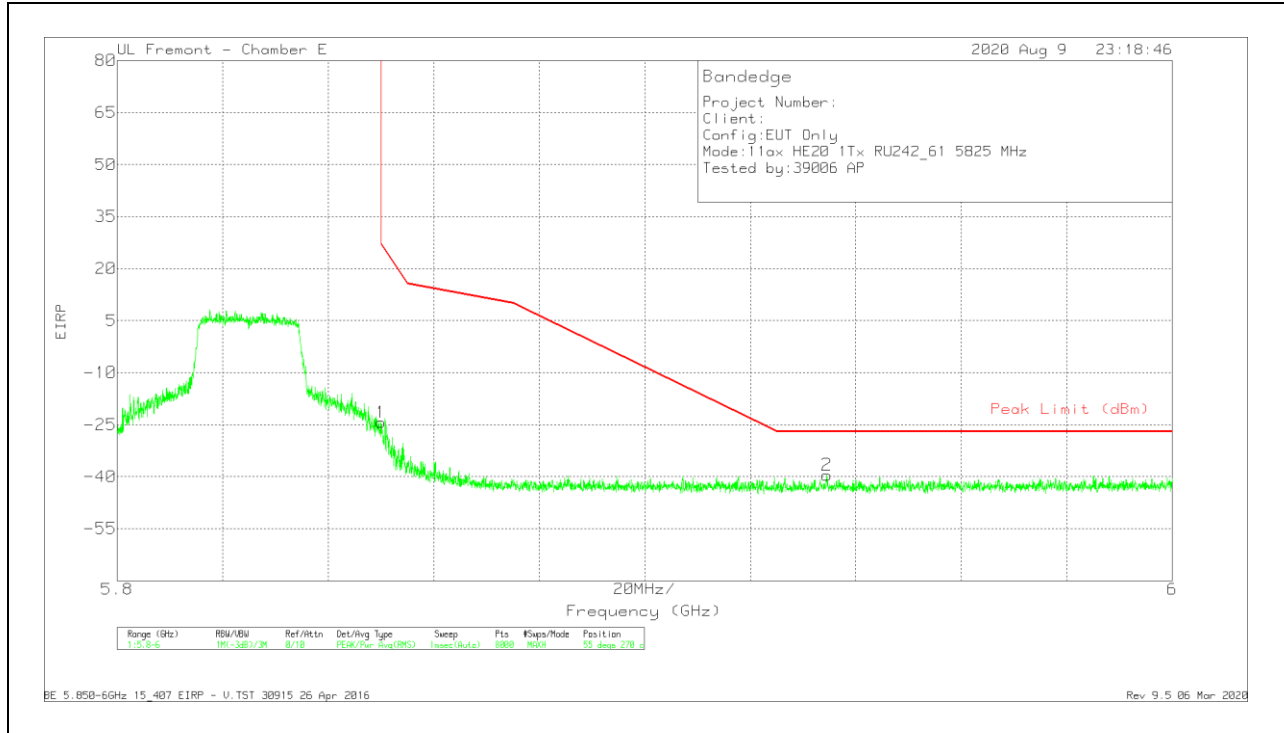

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Parad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-50.36	Pk	34.9	-20.7	11.8	-24.36	26.99	-51.35	55	270	V
2	5.93452	-65.42	Pk	35.1	-21	11.8	-39.52	-27	-12.52	55	270	V


Pk - Peak detector



**ANTENNA 6 – 26 Tones, RU Index 0**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

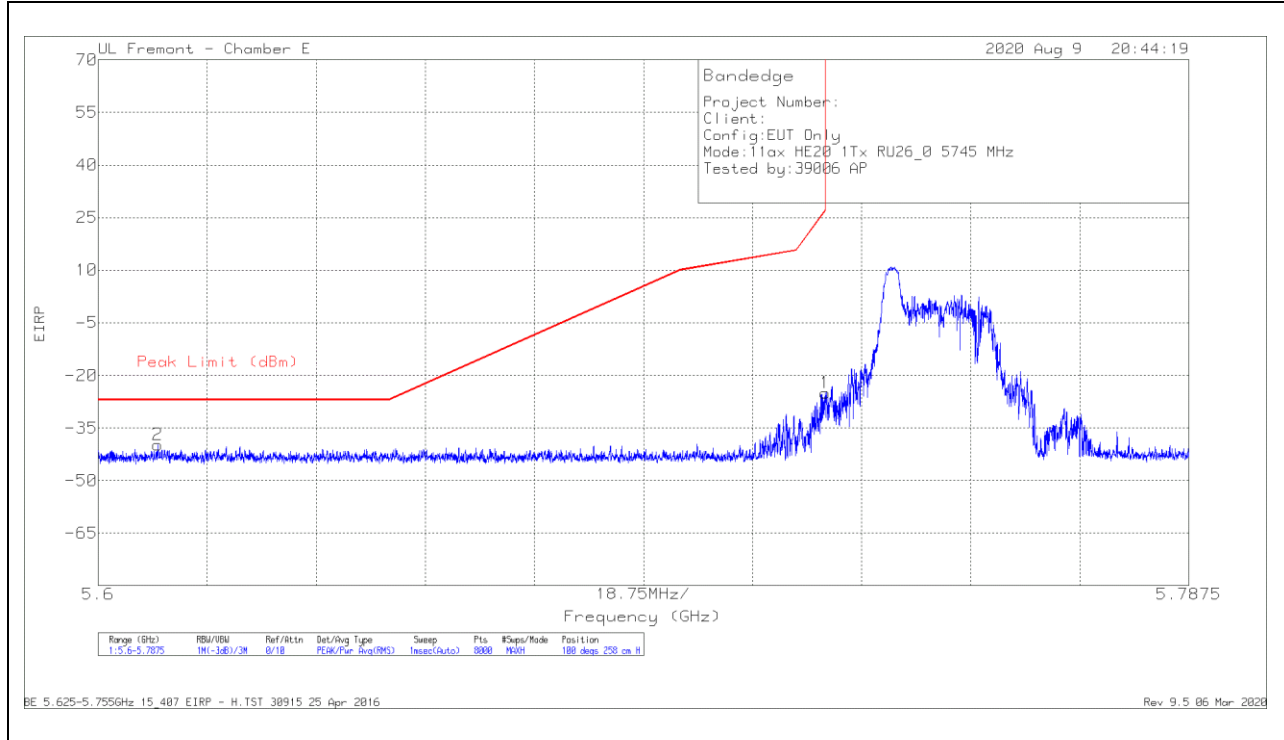

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.61027	-64.63	Pk	34.7	-21.7	11.8	-39.83	-27	-12.83	100	258	H
1	5.72498	-50.22	Pk	34.7	-21.2	11.8	-24.92	26.96	-51.88	100	258	H

Pk - Peak detector

### VERTICAL RESULT

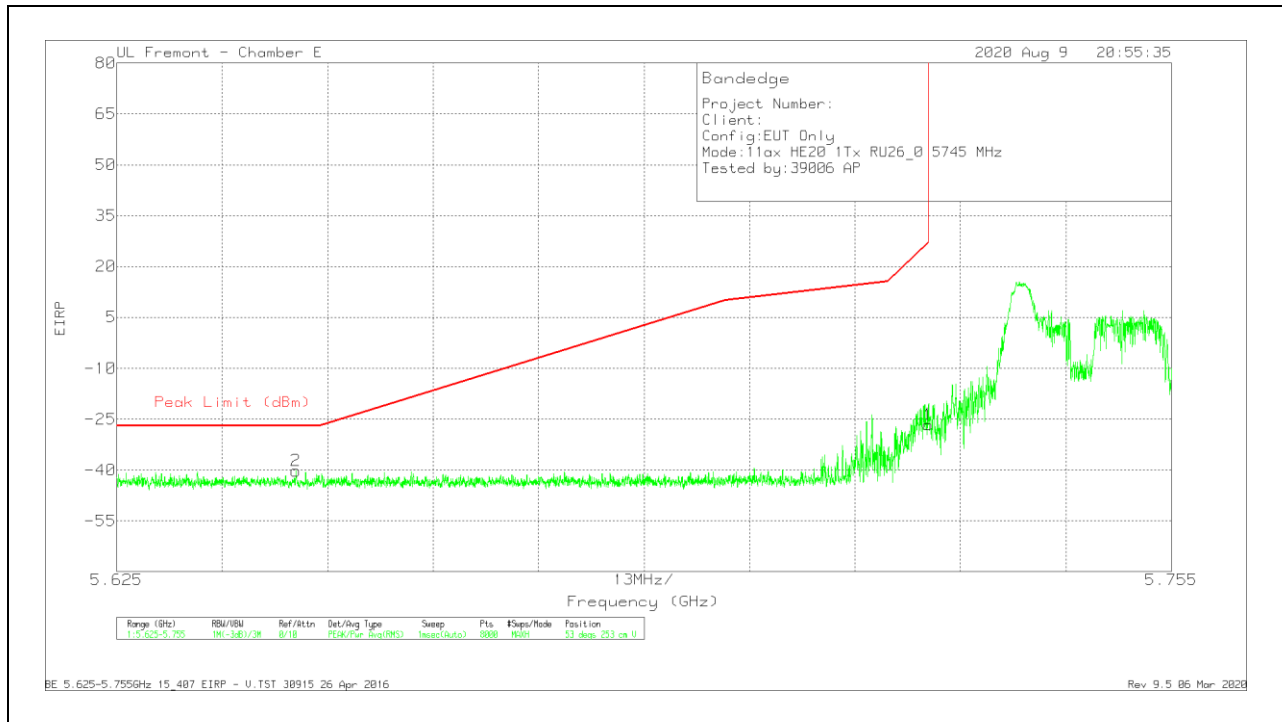


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/PA d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64709	-65.13	PK	34.7	-21.6	11.8	-40.23	-27	-13.23	53	253	V
1	5.725	-51.86	PK	34.7	-21.2	11.8	-26.56	27	-53.56	53	253	V

Pk - Peak detector

**ANTENNA 6 – 26 Tones, RU Index 8**

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

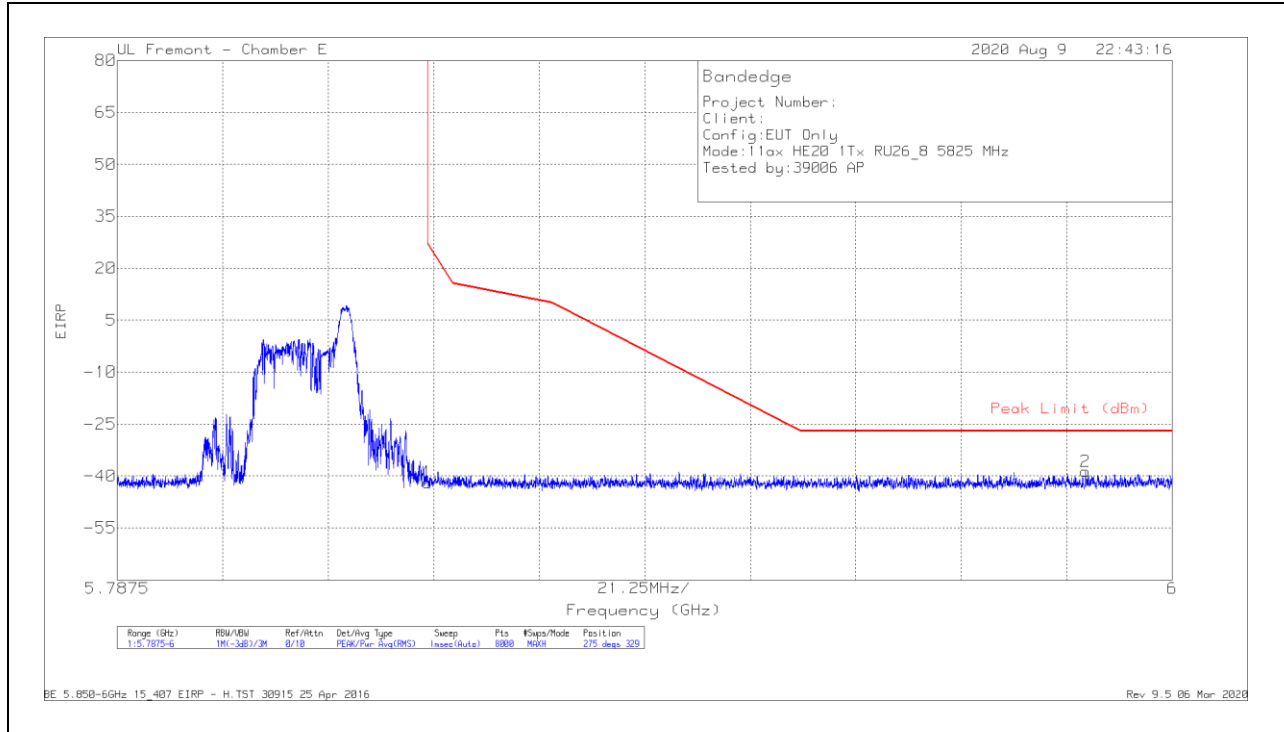

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-67.9	Pk	34.9	-20.7	11.8	-41.9	26.98	-68.88	275	329	H
2	5.98252	-64.79	Pk	35.1	-20.8	11.8	-38.69	-27	-11.69	275	329	H

Pk - Peak detector

### VERTICAL RESULT

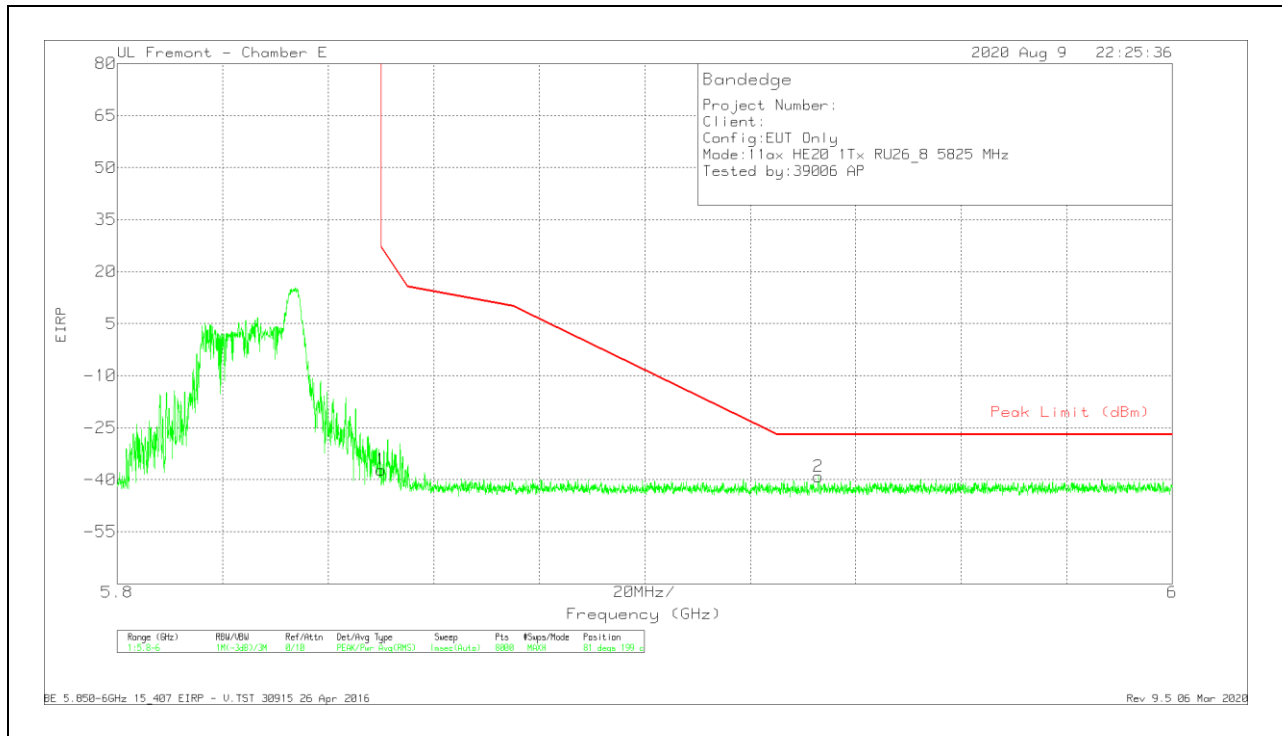


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-63.13	Pk	34.9	-20.7	11.8	-37.13	26.99	-64.12	81	199	V
2	5.93292	-64.97	Pk	35.1	-21	11.8	-39.07	-27	-12.07	81	199	V

Pk - Peak detector

**ANTENNA 5 – 242 Tones, RU Index 61**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

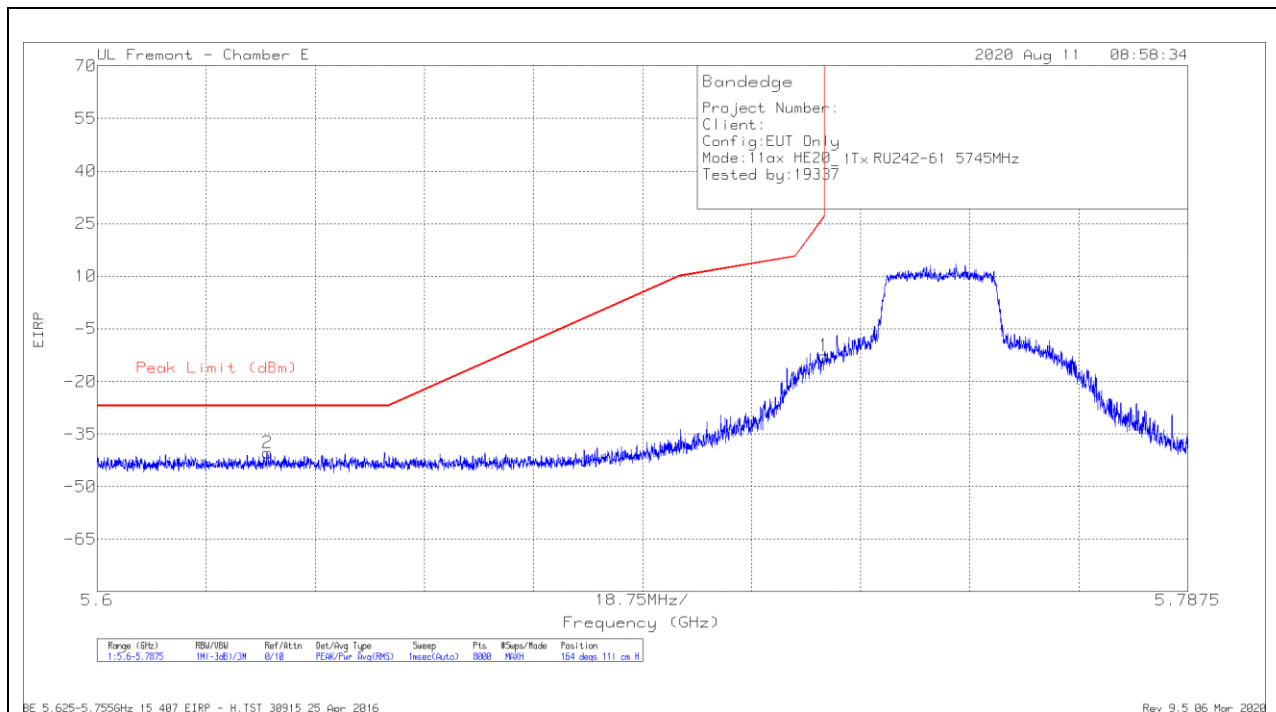

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Parad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6293	-65.11	Pk	34.7	-21.7	11.8	-40.31	-27	-13.31	164	111	H
1	5.72498	-38	Pk	34.7	-21.2	11.8	-12.7	26.96	-39.66	164	111	H

Pk - Peak detector

### VERTICAL RESULT

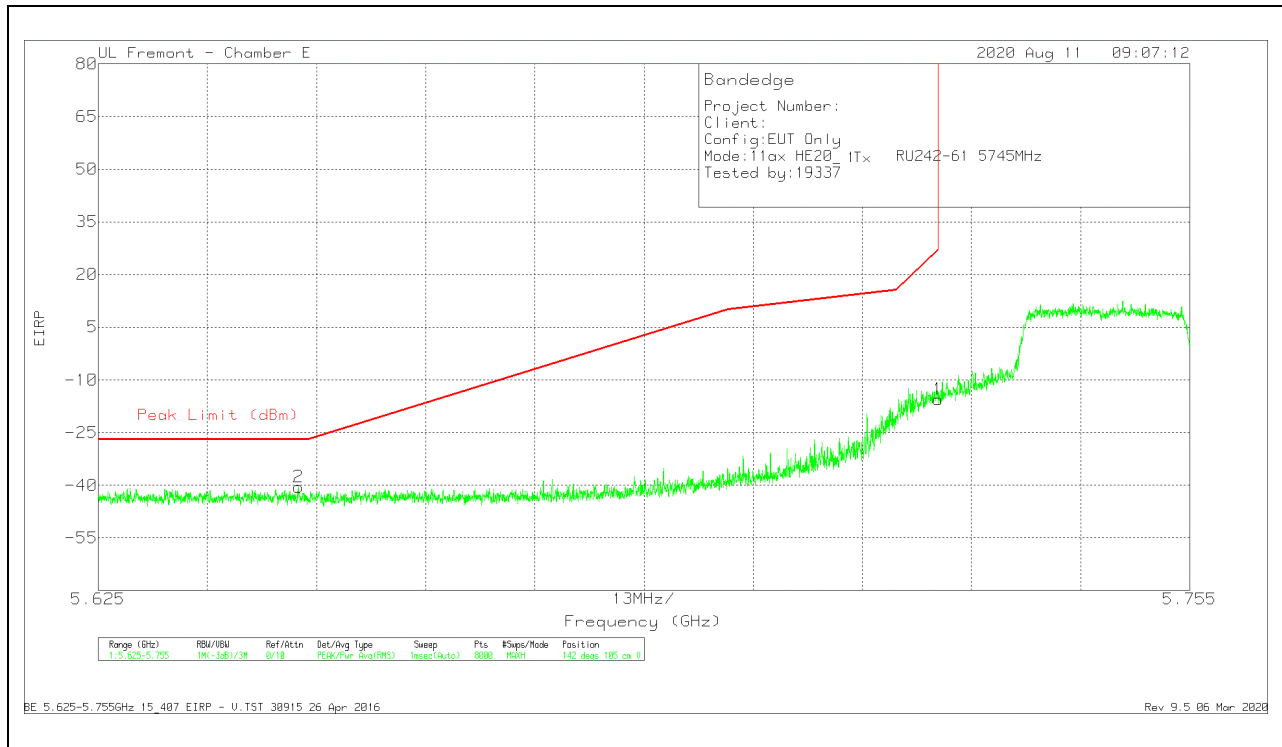


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Parad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64884	-65.58	Pk	34.7	-21.5	11.8	-40.58	-27	-13.58	142	105	V
1	5.725	-40.9	Pk	34.7	-21.2	11.8	-15.6	27	-42.6	142	105	V

Pk - Peak detector

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

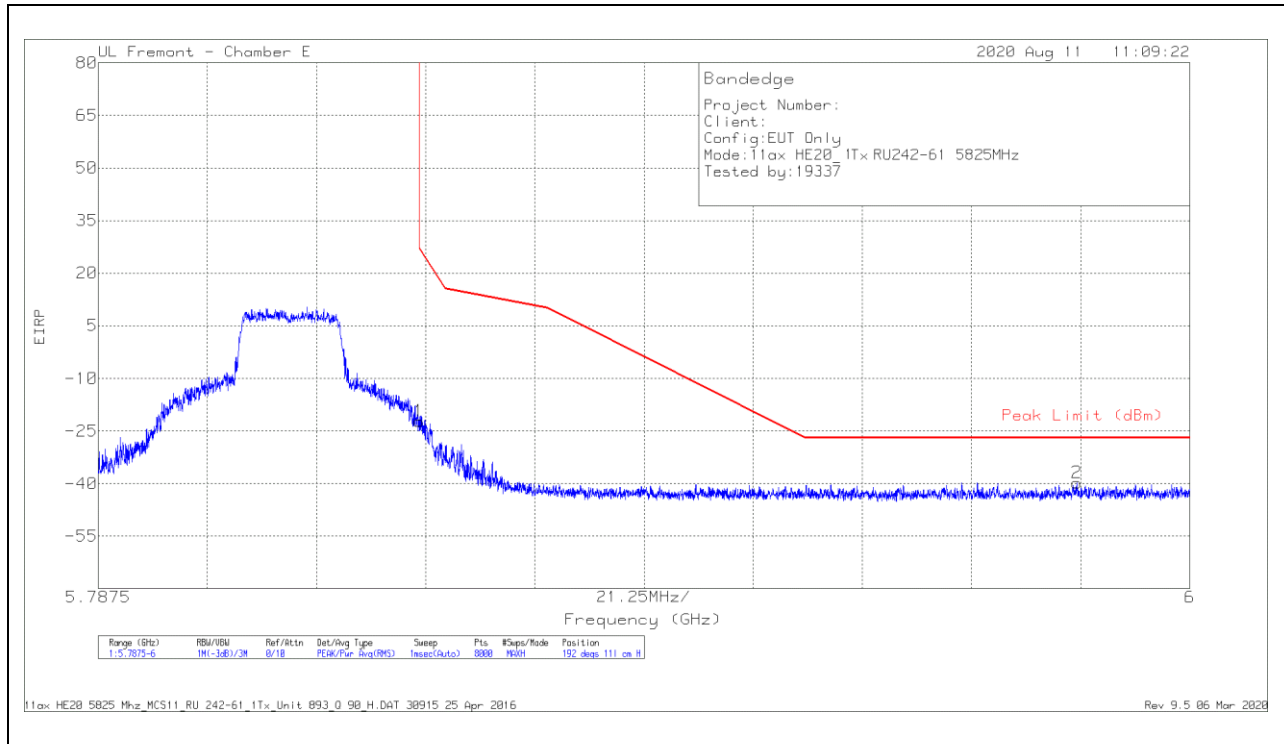

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-48.29	Pk	34.9	-20.7	11.8	-22.29	26.98	-49.27	192	111	H
2	5.97803	-65.99	Pk	35.2	-20.8	11.8	-39.79	-27	-12.79	192	111	H

Pk - Peak detector

### VERTICAL RESULT

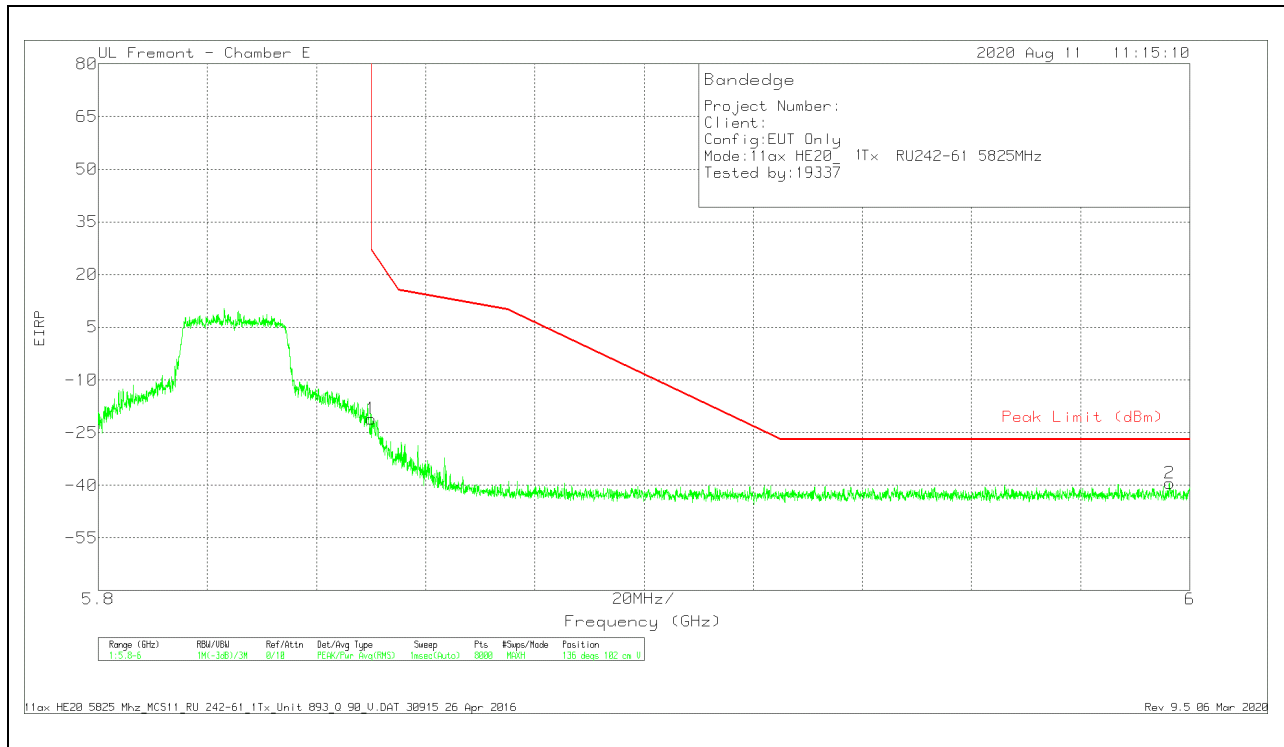

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-47.1	Pk	34.9	-20.7	11.8	-21.1	26.99	-48.09	136	102	V
2	5.99627	-65.86	Pk	35.2	-20.6	11.8	-39.46	-27	-12.46	136	102	V


Pk - Peak detector



**ANTENNA 5 – 26 Tones, RU Index 0**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

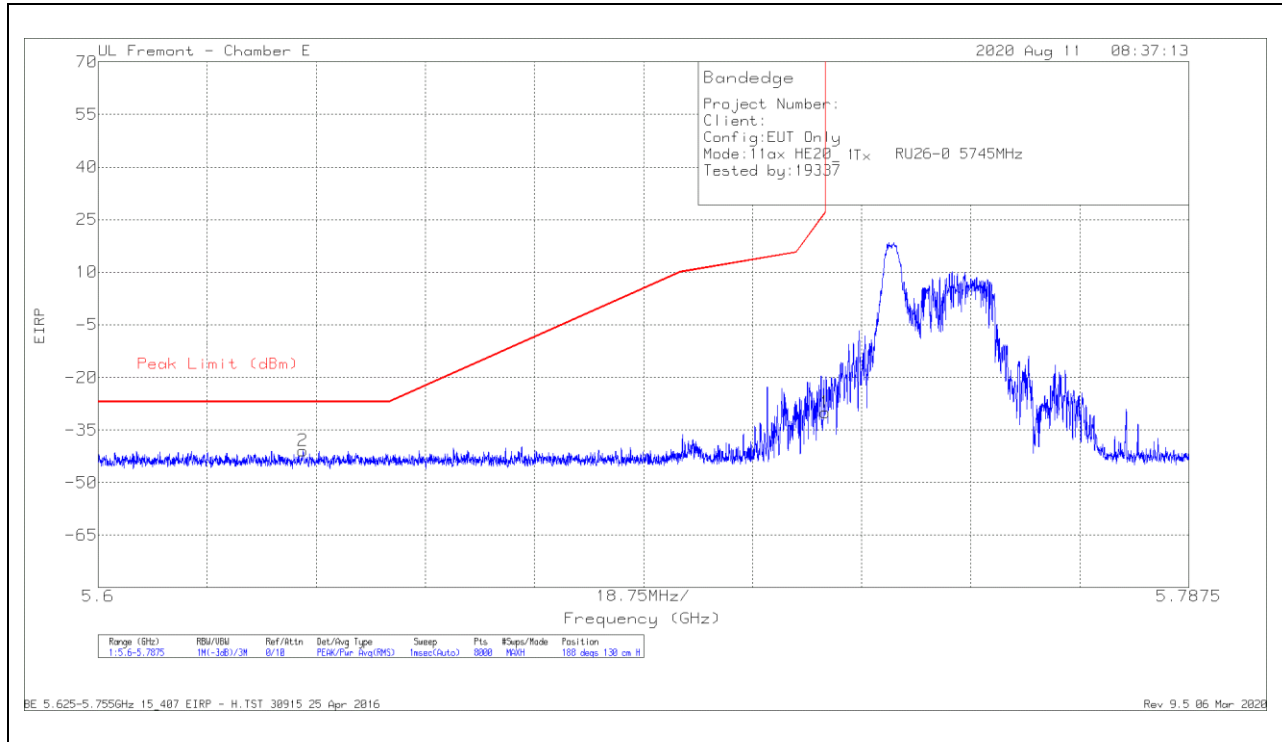

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63521	-65.68	Pk	34.6	-21.7	11.8	-40.98	-27	-13.98	188	130	H
1	5.72498	-55.32	Pk	34.7	-21.2	11.8	-30.02	26.96	-56.98	188	130	H

Pk - Peak detector

### VERTICAL RESULT

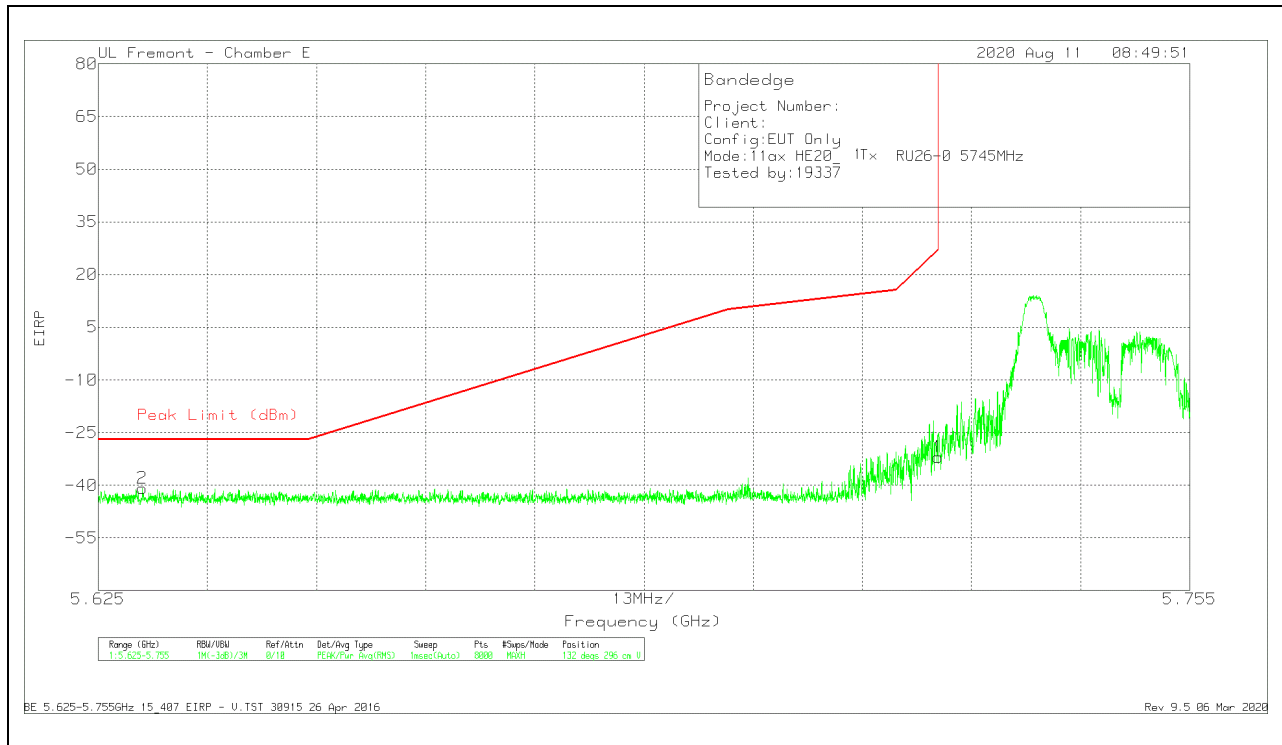


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/PA d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63027	-65.69	Pk	34.7	-21.7	11.8	-40.89	-27	-13.89	132	296	V
1	5.725	-57.28	Pk	34.7	-21.2	11.8	-31.98	27	-58.98	132	296	V

Pk - Peak detector

**ANTENNA 5 – 26 Tones, RU Index 8**

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

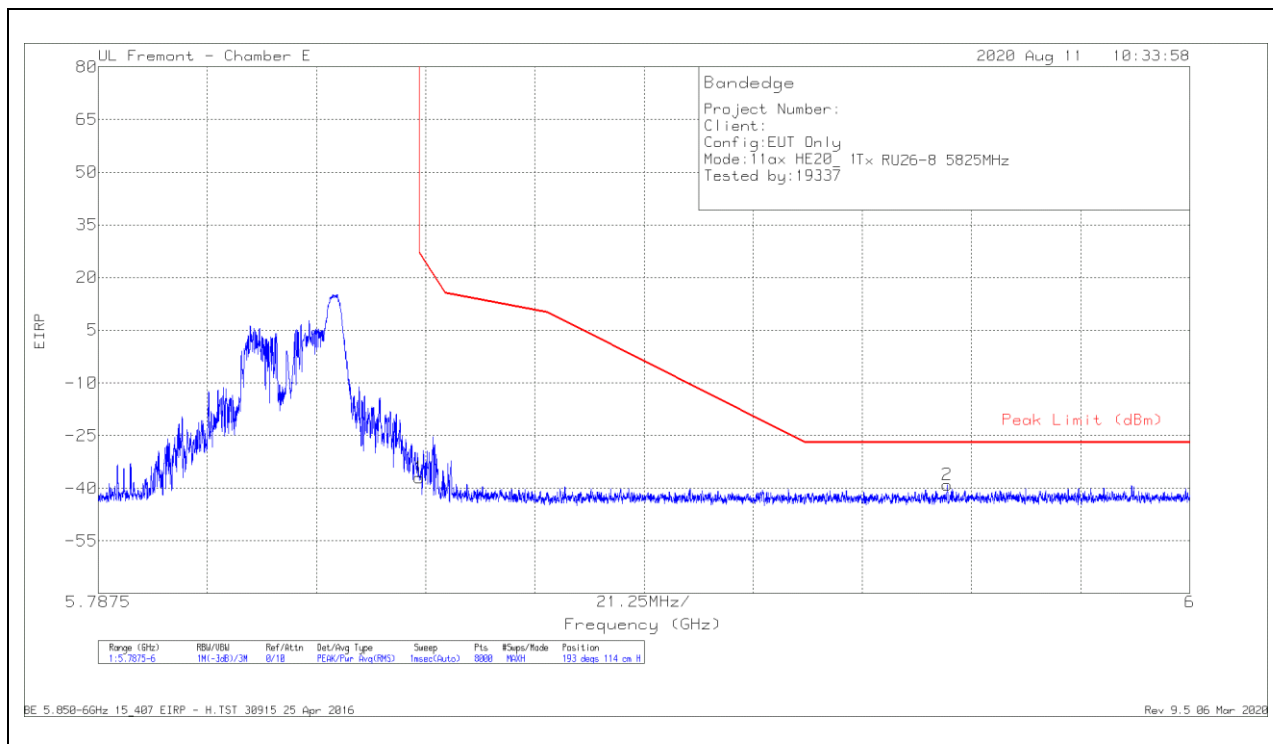

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-62.97	Pk	34.9	-20.7	11.8	-36.97	26.98	-63.95	193	114	H
2	5.95277	-65.05	Pk	35.1	-20.9	11.8	-39.05	-27	-12.05	193	114	H

Pk - Peak detector

### VERTICAL RESULT

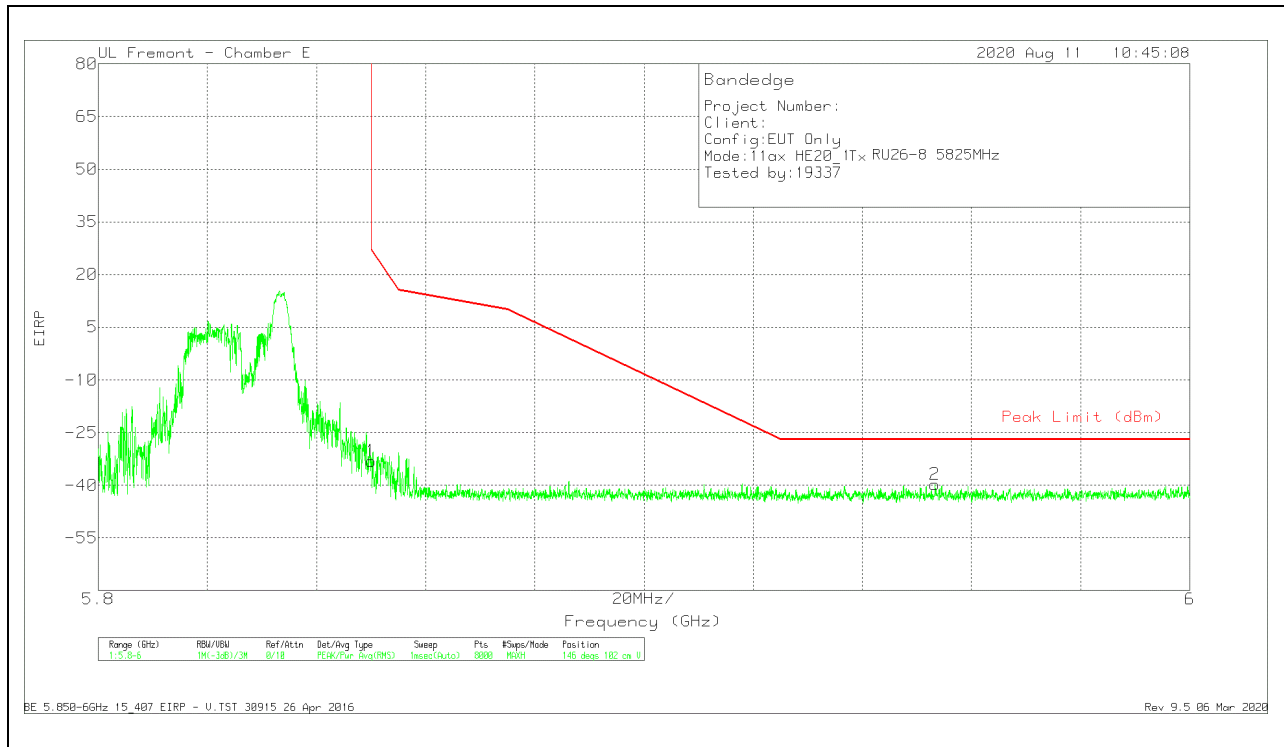


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/PA d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-59.08	Pk	34.9	-20.7	11.8	-33.08	26.99	-60.07	146	102	V
2	5.95332	-65.76	Pk	35.1	-20.9	11.8	-39.76	-27	-12.76	146	102	V

Pk - Peak detector

**2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 242 Tones, RU Index 61**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

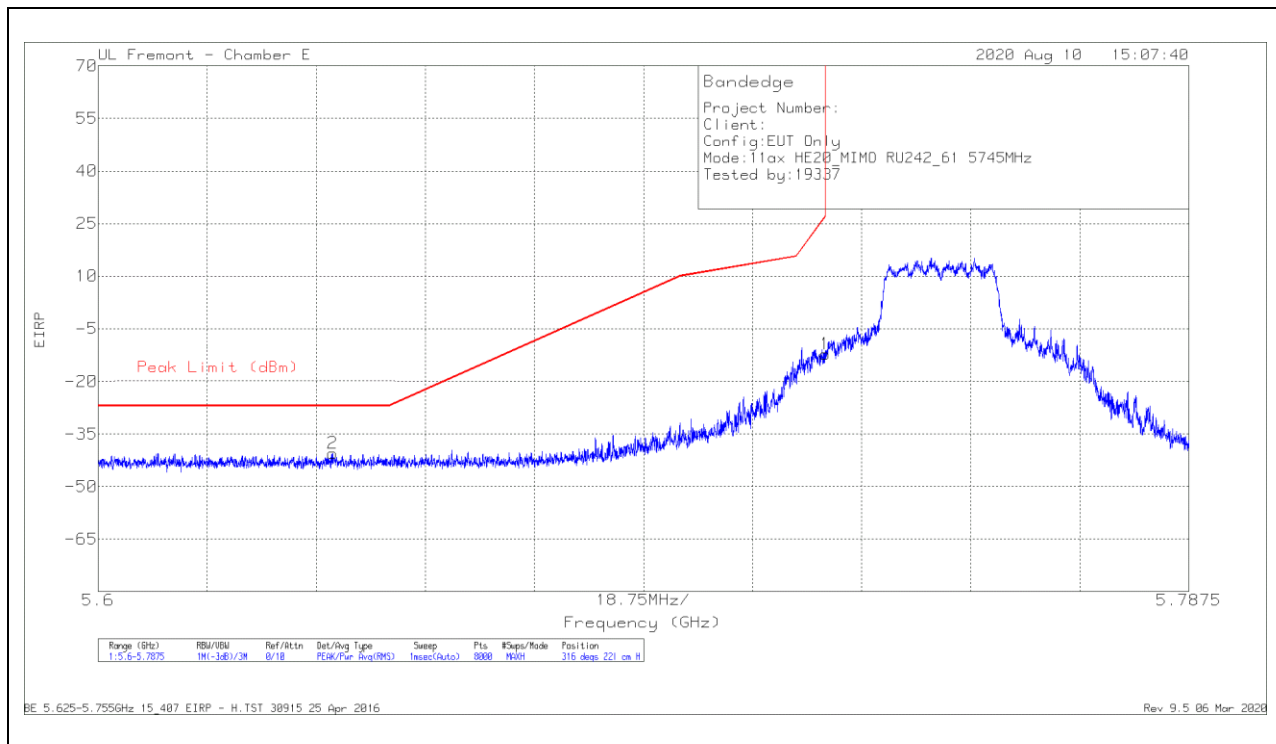

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64027	-65.51	Pk	34.7	-21.6	11.8	-40.61	-27	-13.61	316	221	H
1	5.72498	-37.62	Pk	34.7	-21.2	11.8	-12.32	26.96	-39.28	316	221	H

Pk - Peak detector

### VERTICAL RESULT

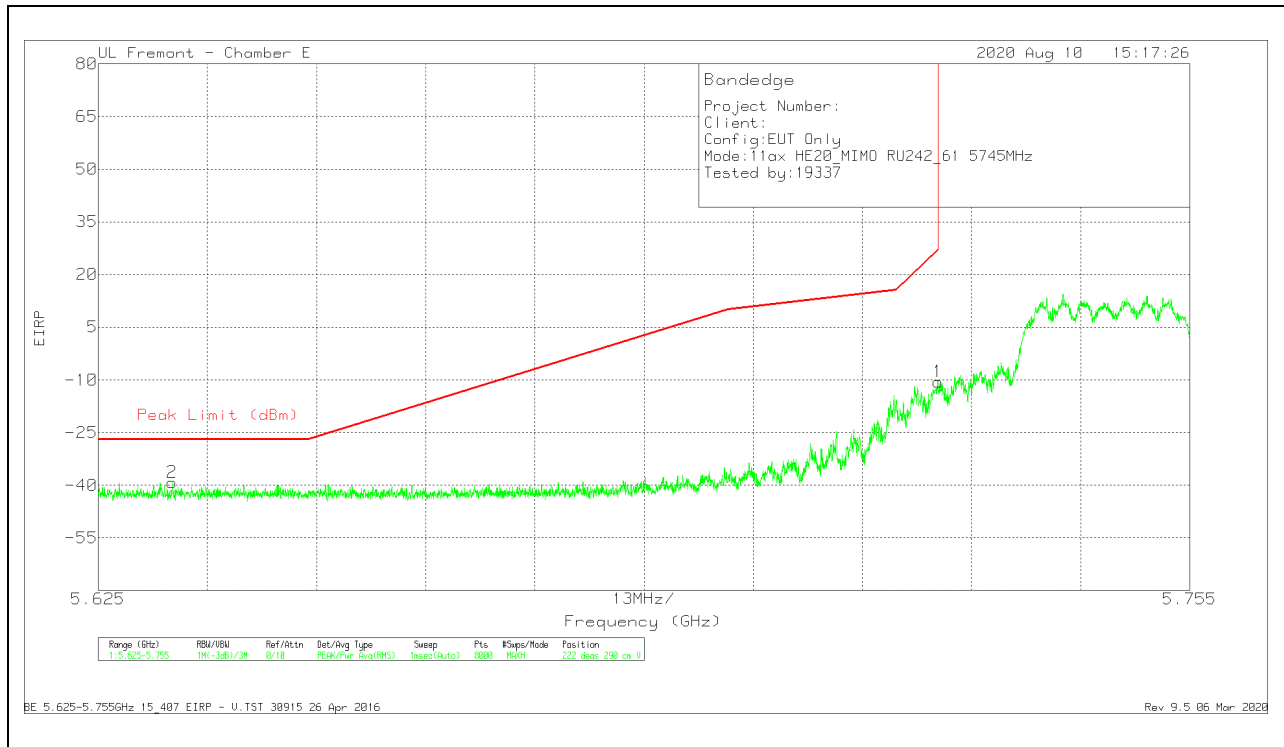


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/PA d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63379	-63.84	Pk	34.6	-21.7	11.8	-39.14	-27	-12.14	222	290	V
1	5.725	-35.8	Pk	34.7	-21.2	11.8	-10.5	27	-37.5	222	290	V

Pk - Peak detector

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

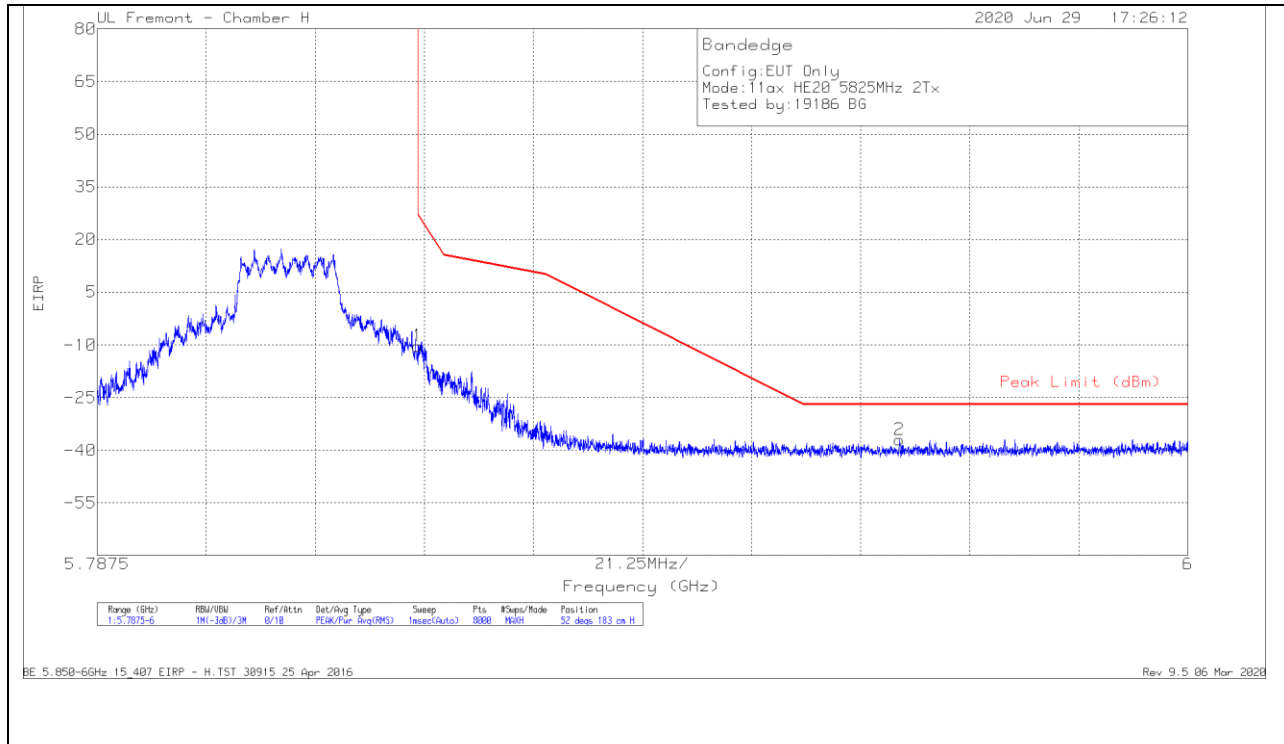


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-36.38	Pk	35	-20.7	11.8	-10.28	26.98	-37.26	52	183	H
2	5.94384	-63.57	Pk	35.2	-20.4	11.8	-36.97	-27	-9.97	52	183	H

Pk - Peak detector

BE 5.850-6GHz 15\_407 EIRP - H.TST 30915 25 Apr 2016  
 Rev 9.5 06 Mar 2020

### VERTICAL RESULT

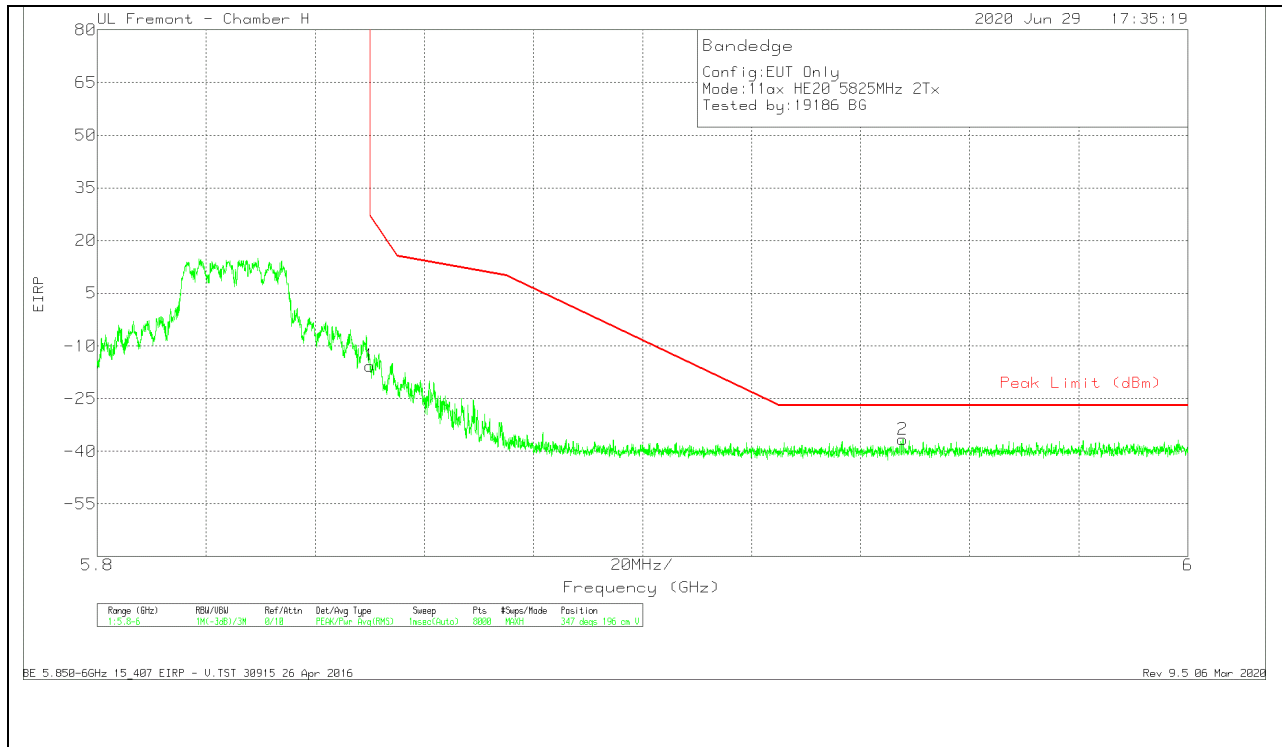

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-41.74	Pk	35	-20.7	11.8	-15.64	26.99	-42.63	347	196	V
2	5.94774	-63.17	Pk	35.2	-20.4	11.8	-36.57	-27	-9.57	347	196	V


Pk - Peak detector

BE 5.850-6GHz 15\_407 EIRP - V.TST 30915 26 Apr 2016  
 Rev 9.5 06 Mar 2020




# HARMONICS AND SPURIOUS EMISSIONS

## LOW CHANNEL RESULTS

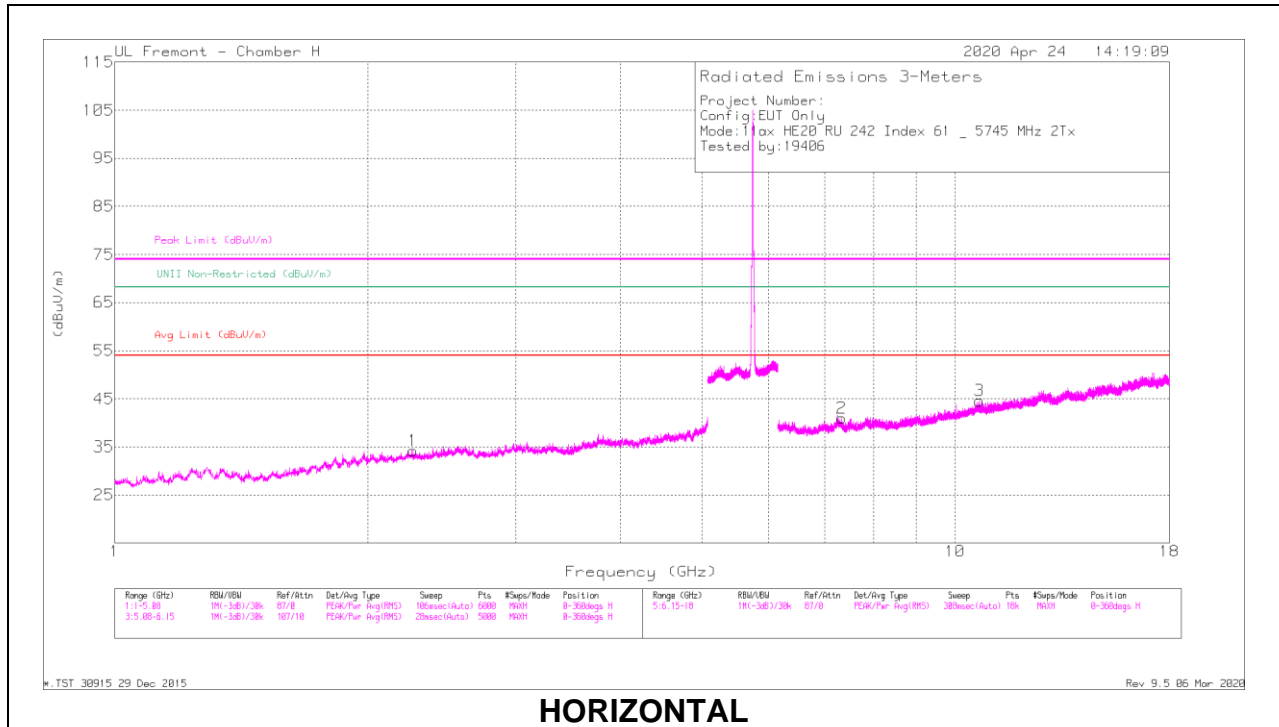

**HORIZONTAL**

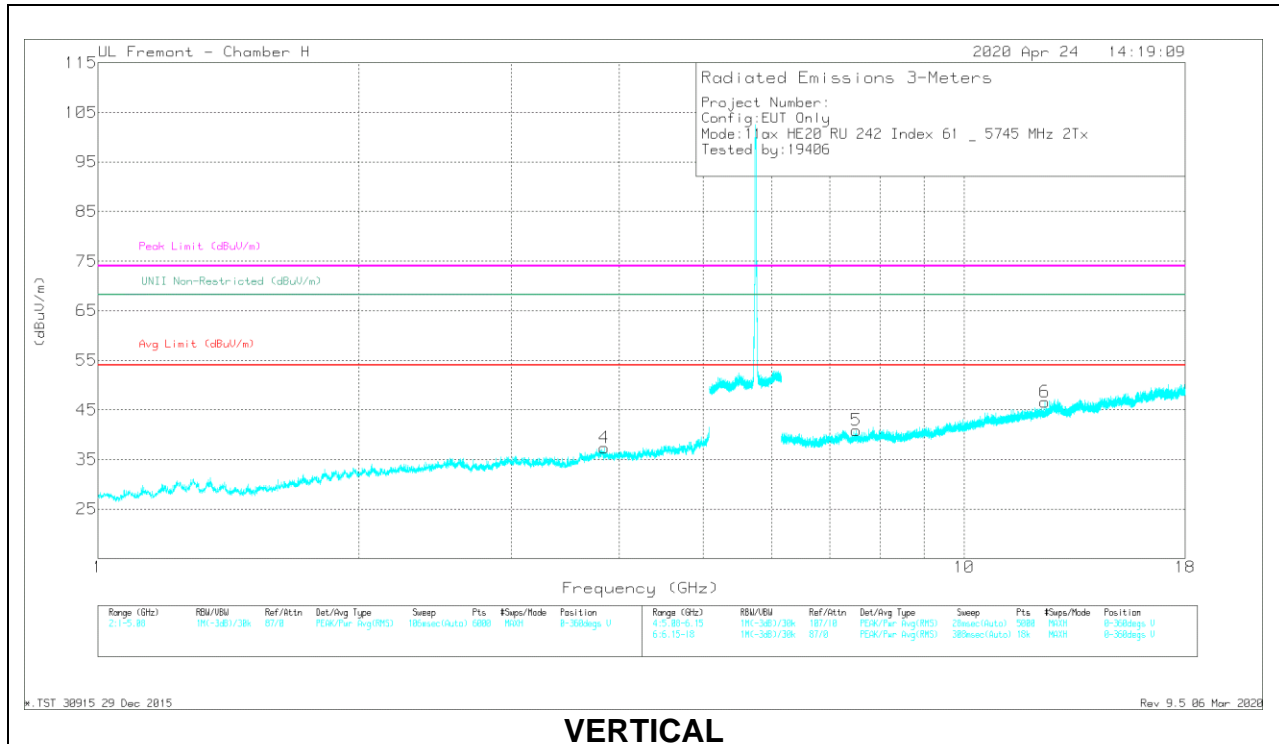

**VERTICAL**

**RADIATED EMISSIONS**

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.26276	43.31	PK-U	31.9	-33.8	41.41	-	-	74	-32.59	40	128	H
	* 2.26504	31.48	ADR	31.9	-33.8	29.58	54	-24.42	-	-	40	128	H
4	* 3.8447	42.66	PK-U	33.6	-32	44.26	-	-	74	-29.74	162	115	V
	* 3.84474	31.08	ADR	33.6	-32	32.68	54	-21.32	-	-	162	115	V
2	* 7.32616	38.9	PK-U	36	-27.7	47.2	-	-	74	-26.8	228	160	H
	* 7.32334	27.69	ADR	36	-27.6	36.09	54	-17.91	-	-	228	160	H
3	* 10.6952	37.43	PK-U	37.6	-24	51.03	-	-	74	-22.97	140	197	H
	* 10.6944	26.18	ADR	37.6	-24	39.78	54	-14.22	-	-	140	197	H
5	* 7.50803	40.16	PK-U	36	-27.9	48.26	-	-	74	-25.74	205	115	V
	* 7.50852	28.37	ADR	36	-27.9	36.47	54	-17.53	-	-	205	115	V
6	* 12.3902	37.24	PK-U	39	-24.1	52.14	-	-	74	-21.86	104	189	V
	* 12.3917	26.02	ADR	38.9	-24.1	40.82	54	-13.18	-	-	104	189	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

\*.TST 30915 29 Dec 2015  
 Rev 9.5 06 Mar 2020

### MID CHANNEL RESULTS

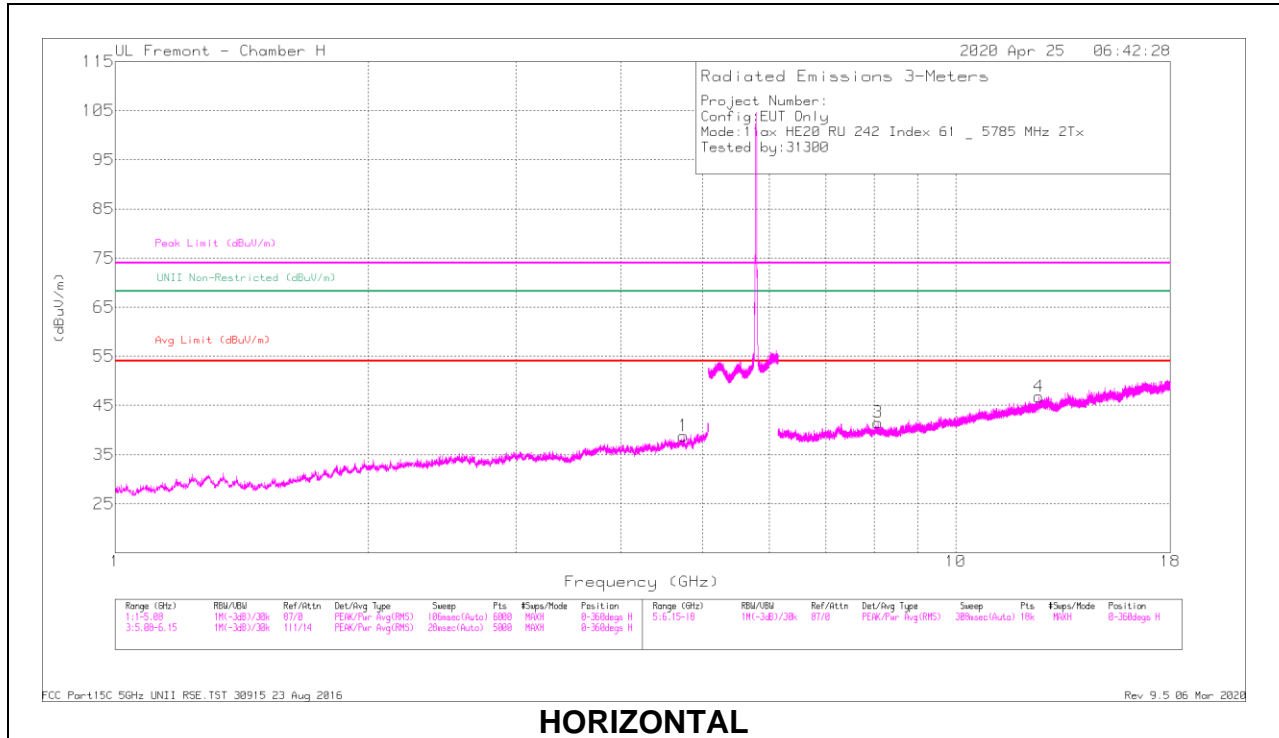

### HORIZONTAL

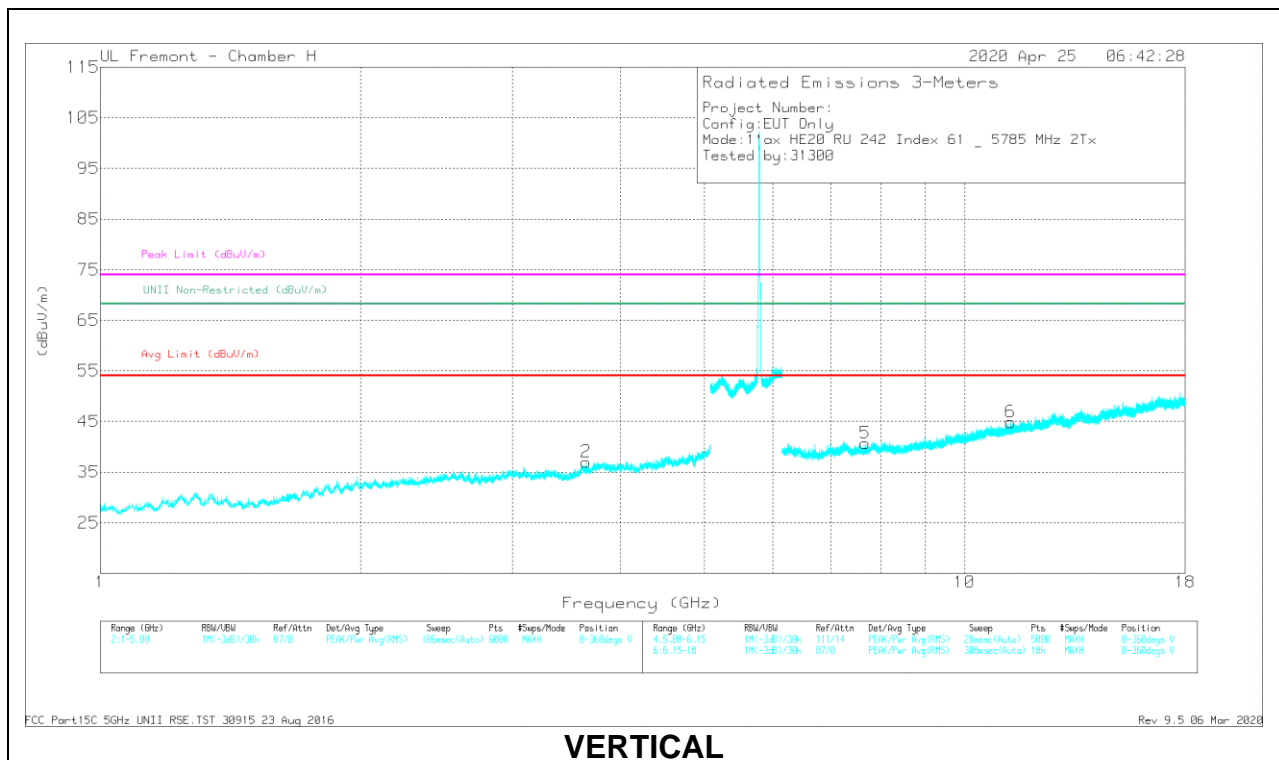


### VERTICAL

**RADIATED EMISSIONS**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.74483	42	PK-U	34.2	-30.7	45.5	-	-	74	-28.5	-	-	311	101	H
	* 4.74565	30.54	ADR	34.2	-30.7	34.04	54	-19.96	-	-	-	-	311	101	H
2	* 3.65055	43.34	PK-U	33	-32.3	44.04	-	-	74	-29.96	-	-	270	101	V
	* 3.64988	31.18	ADR	33	-32.3	31.88	54	-22.12	-	-	-	-	270	101	V
3	* 8.0783	38.32	PK-U	36.2	-26.8	47.72	-	-	74	-26.28	-	-	180	101	H
	* 8.08016	26.85	ADR	36.2	-26.8	36.25	54	-17.75	-	-	-	-	180	101	H
4	* 12.5536	37.22	PK-U	39.4	-23.5	53.12	-	-	74	-20.88	-	-	255	200	H
	* 12.5530	25.82	ADR	39.5	-23.5	41.82	54	-12.18	-	-	-	-	255	200	H
5	* 7.67439	39.03	PK-U	36.2	-28.2	47.03	-	-	74	-26.97	-	-	290	200	V
	* 7.67217	27.53	ADR	36.2	-28.2	35.53	54	-18.47	-	-	-	-	290	200	V
6	* 11.3025	36.89	PK-U	38	-24.1	50.79	-	-	74	-23.21	-	-	158	101	V
	* 11.3022	25.52	ADR	38	-24.1	39.42	54	-14.58	-	-	-	-	158	101	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL RESULTS

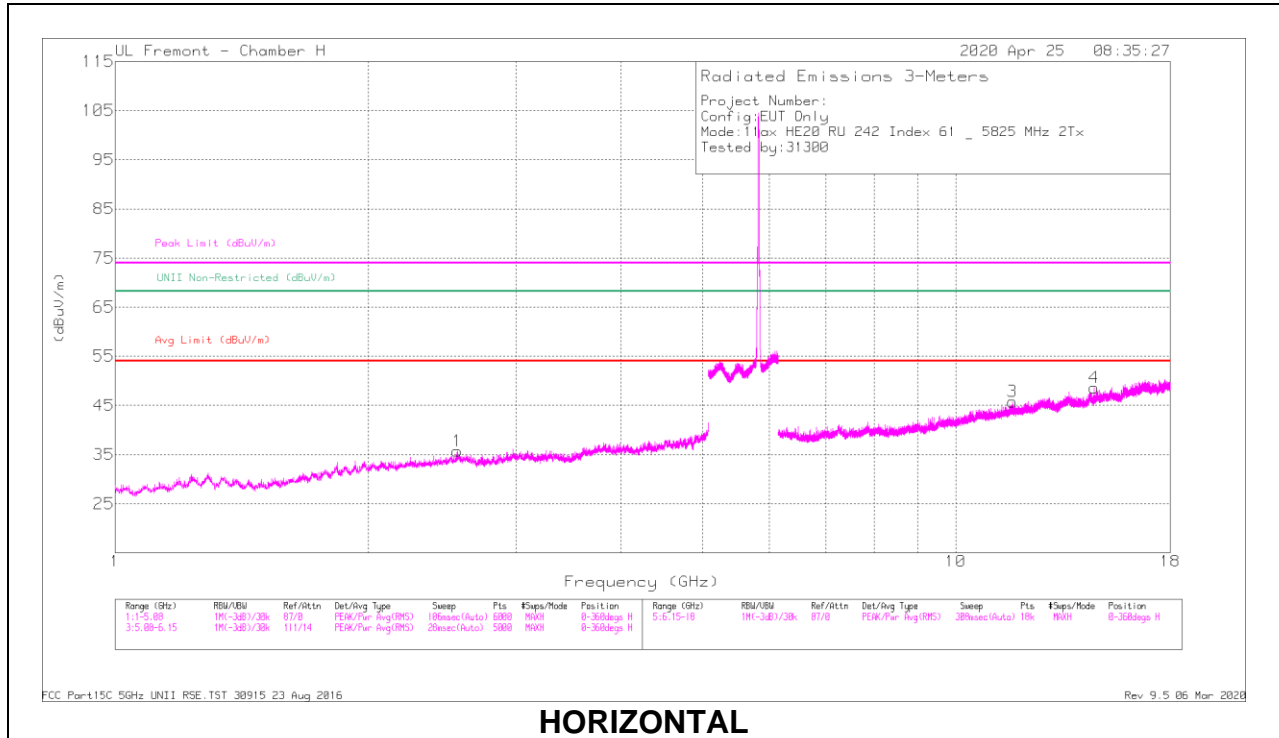

### HORIZONTAL

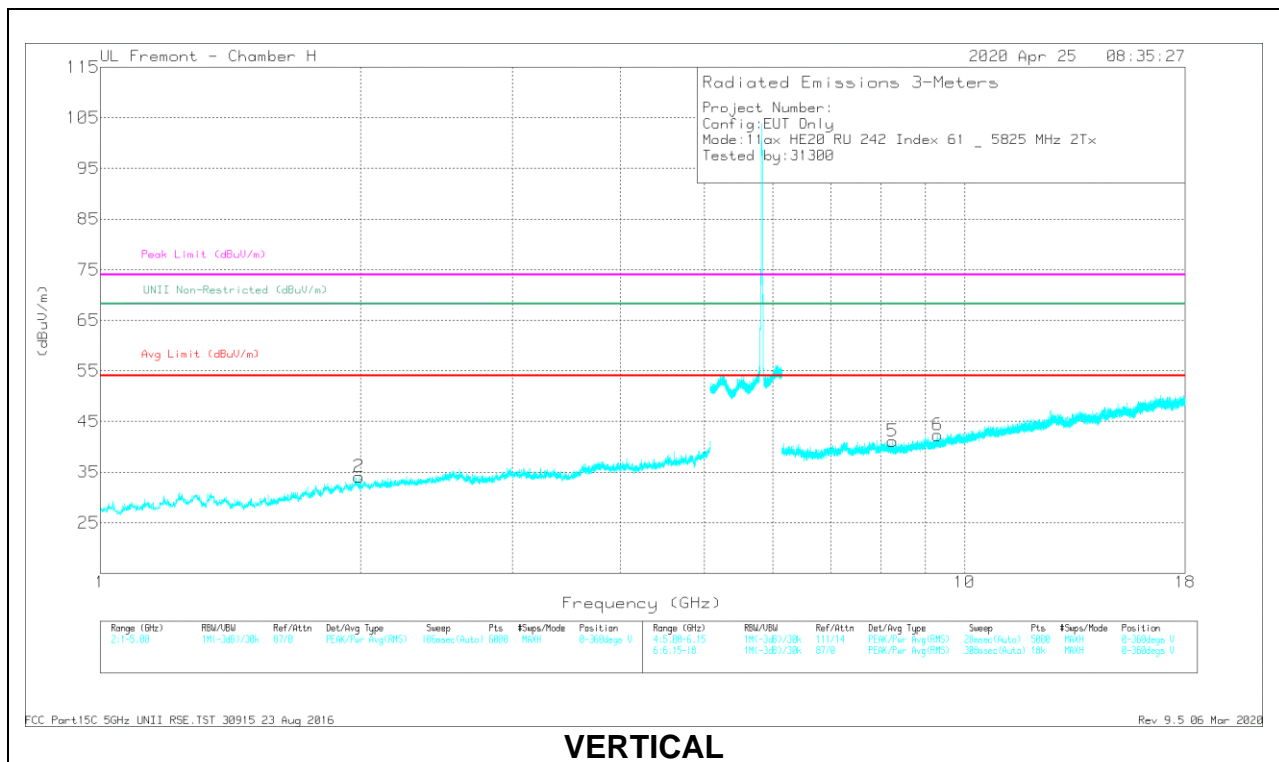

### VERTICAL

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 11.6854	36.51	PK-U	38.4	-23.1	51.81	-	-	74	-22.19	-	-	100	101	H
	* 11.6870	25.6	ADR	38.4	-23.1	40.9	54	-13.1	-	-	-	-	100	101	H
5	* 8.25613	38.1	PK-U	36.1	-27	47.2	-	-	74	-26.8	-	-	120	200	V
	* 8.25606	27.11	ADR	36.1	-27	36.21	54	-17.79	-	-	-	-	120	200	V
6	* 9.30912	37.25	PK-U	36.4	-25.6	48.05	-	-	74	-25.95	-	-	88	200	V
	* 9.31009	26.47	ADR	36.4	-25.6	37.27	54	-16.73	-	-	-	-	88	200	V
2	1.99191	43.37	PK-U	31.5	-34.3	40.57	-	-	-	-	68.2	-27.63	28	101	V
1	2.55281	42.07	PK-U	32.5	-32.4	42.17	-	-	-	-	68.2	-26.03	0	101	H
4	14.61717	38	PK-U	40.1	-23.6	54.5	-	-	-	-	68.2	-13.7	75	101	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 26 Tones, RU Index 0**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

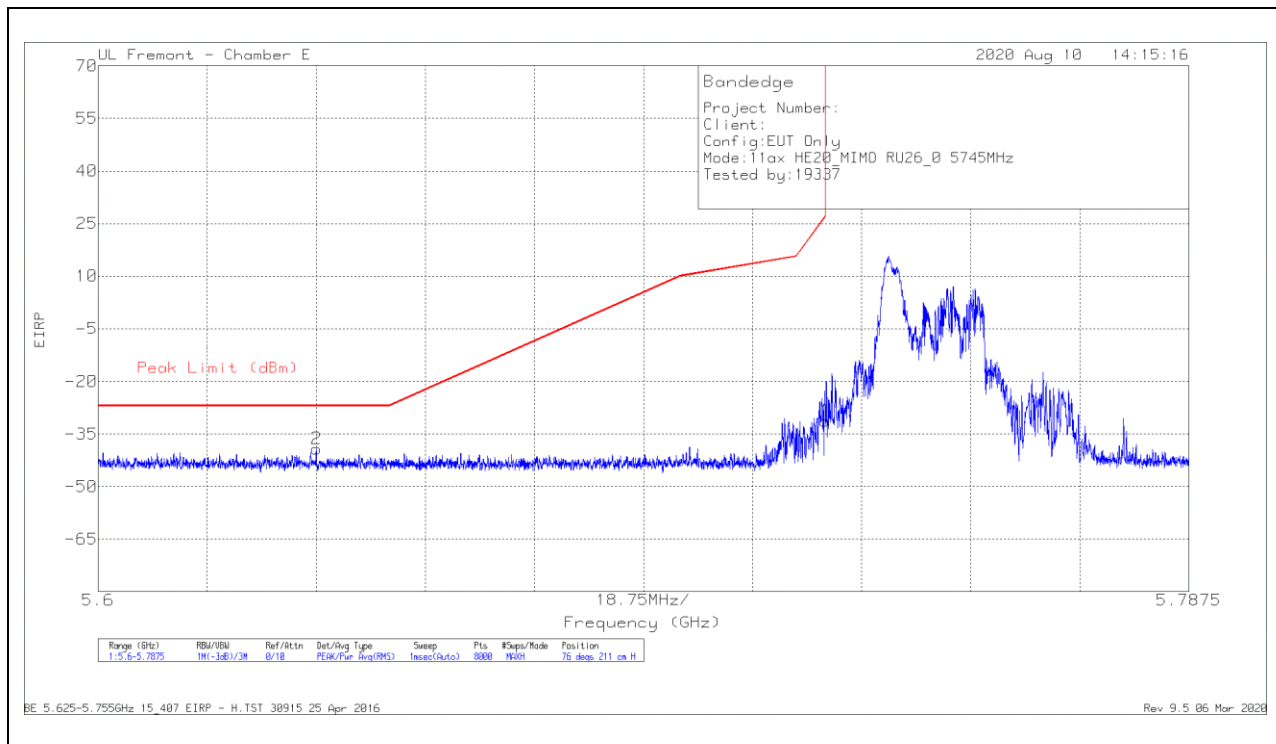

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6375	-63.99	Pk	34.6	-21.6	11.8	-39.19	-27	-12.19	76	211	H
1	5.72498	-56.59	Pk	34.7	-21.2	11.8	-31.29	26.96	-58.25	76	211	H

Pk - Peak detector

### VERTICAL RESULT

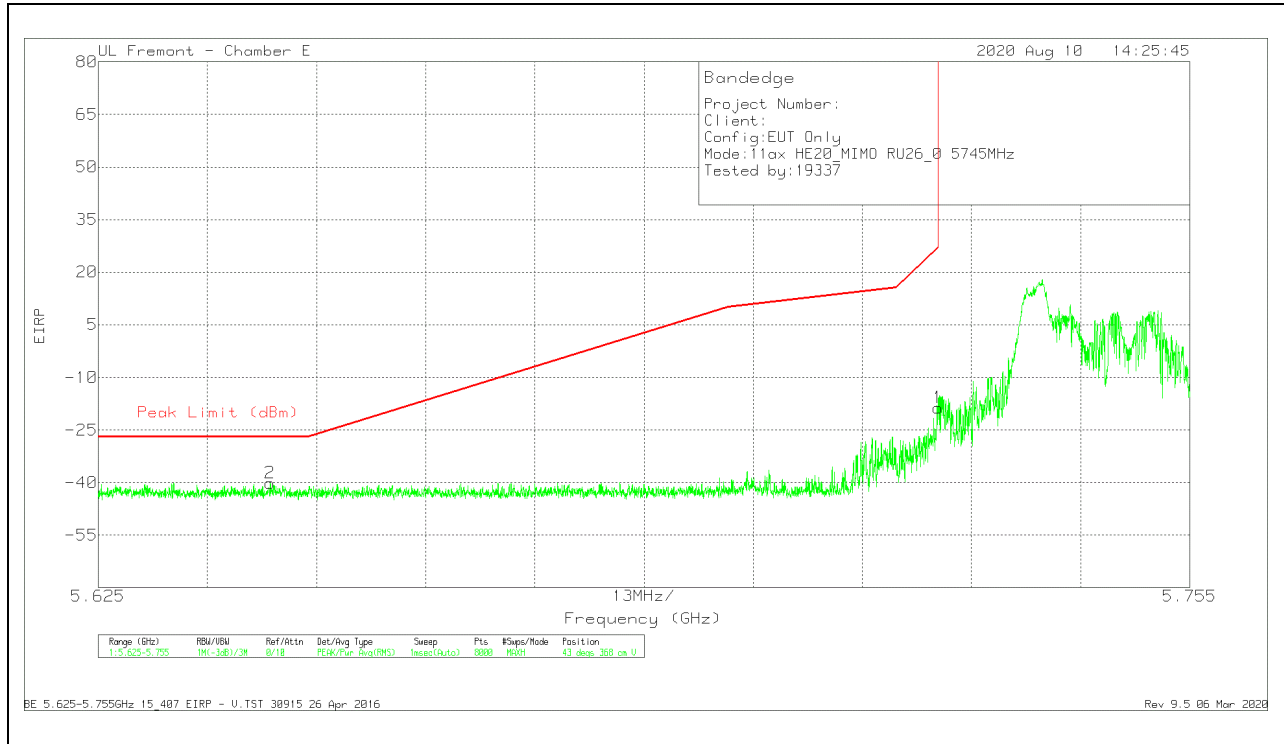

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64549	-65.07	Pk	34.8	-21.6	11.8	-40.07	-27	-13.07	43	368	V
1	5.725	-43.91	Pk	34.7	-21.2	11.8	-18.61	27	-45.61	43	368	V


Pk - Peak detector



**2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 26 Tones, RU Index 8**

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

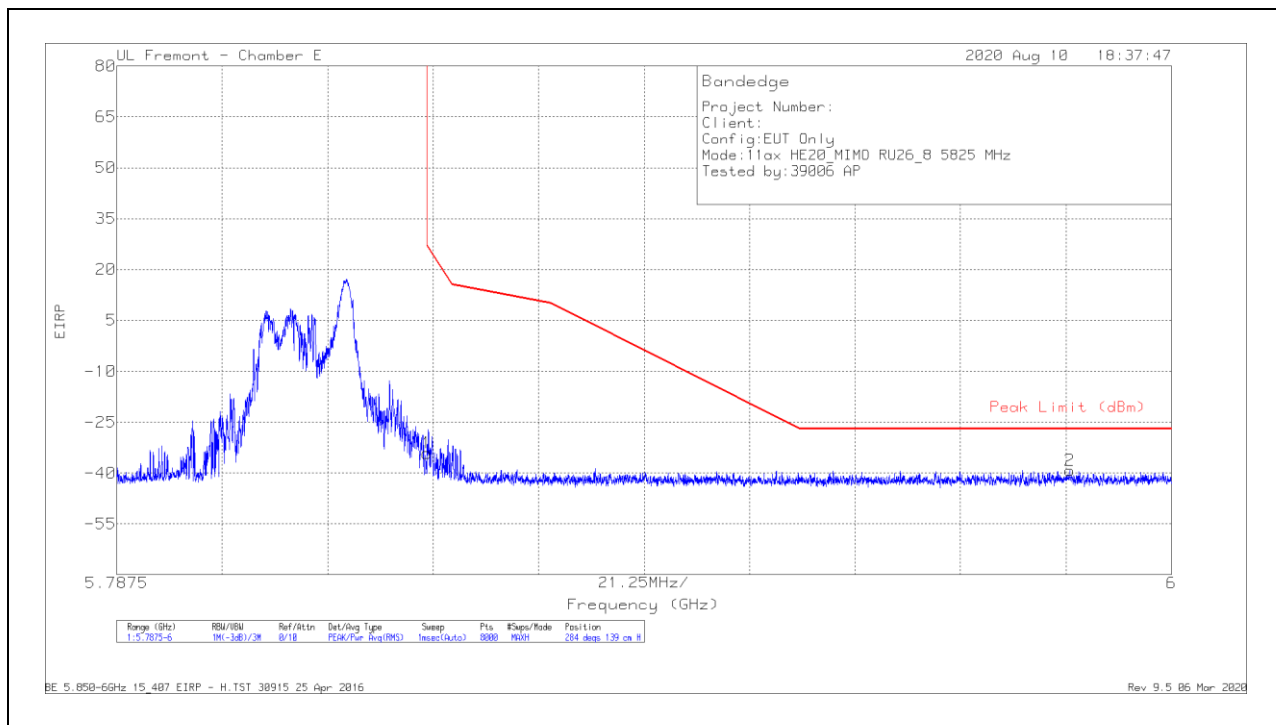

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-60.13	Pk	34.9	-20.7	11.8	-34.13	26.98	-61.11	284	139	H
2	5.97955	-65.37	Pk	35.2	-20.8	11.8	-39.17	-27	-12.17	284	139	H

Pk - Peak detector

### VERTICAL RESULT

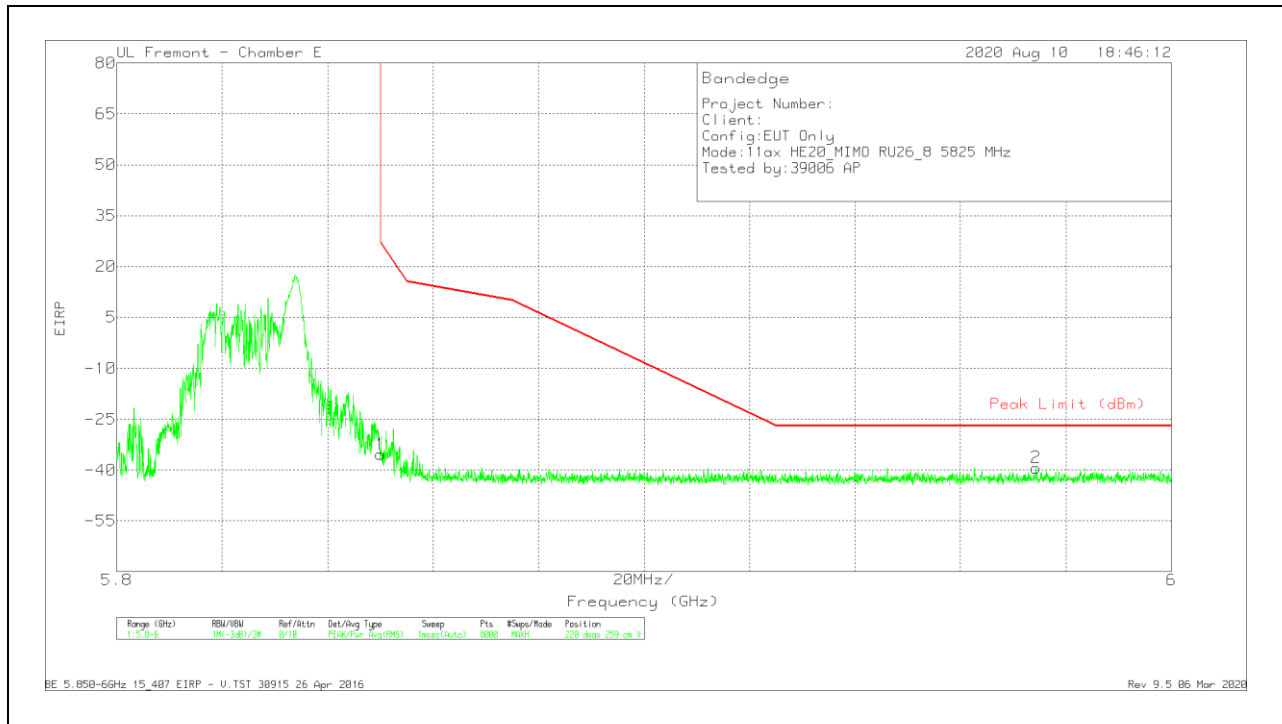


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Fitr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-61.39	Pk	34.9	-20.7	11.8	-35.39	26.99	-62.38	220	259	V
2	5.97435	-65.41	Pk	35.2	-20.9	11.8	-39.31	-27	-12.31	220	259	V


Pk - Peak detector

# HARMONICS AND SPURIOUS EMISSIONS

## LOW CHANNEL RESULTS

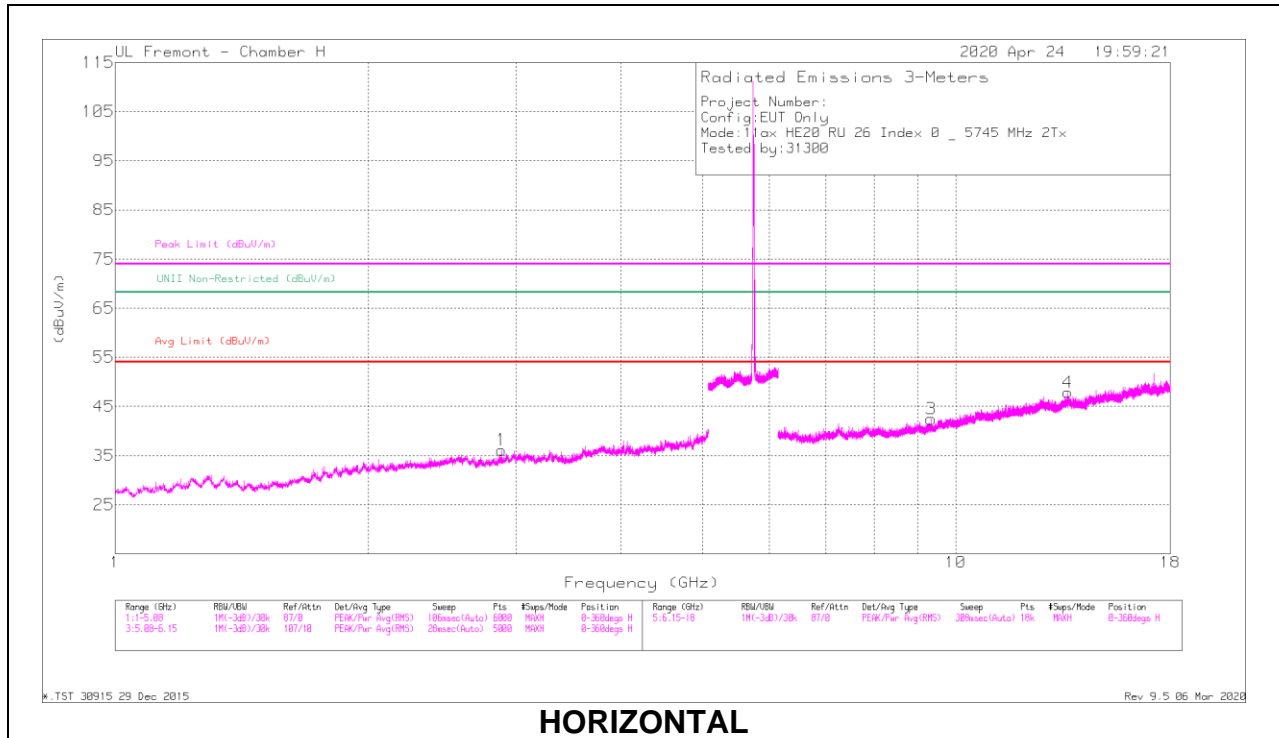

**HORIZONTAL**

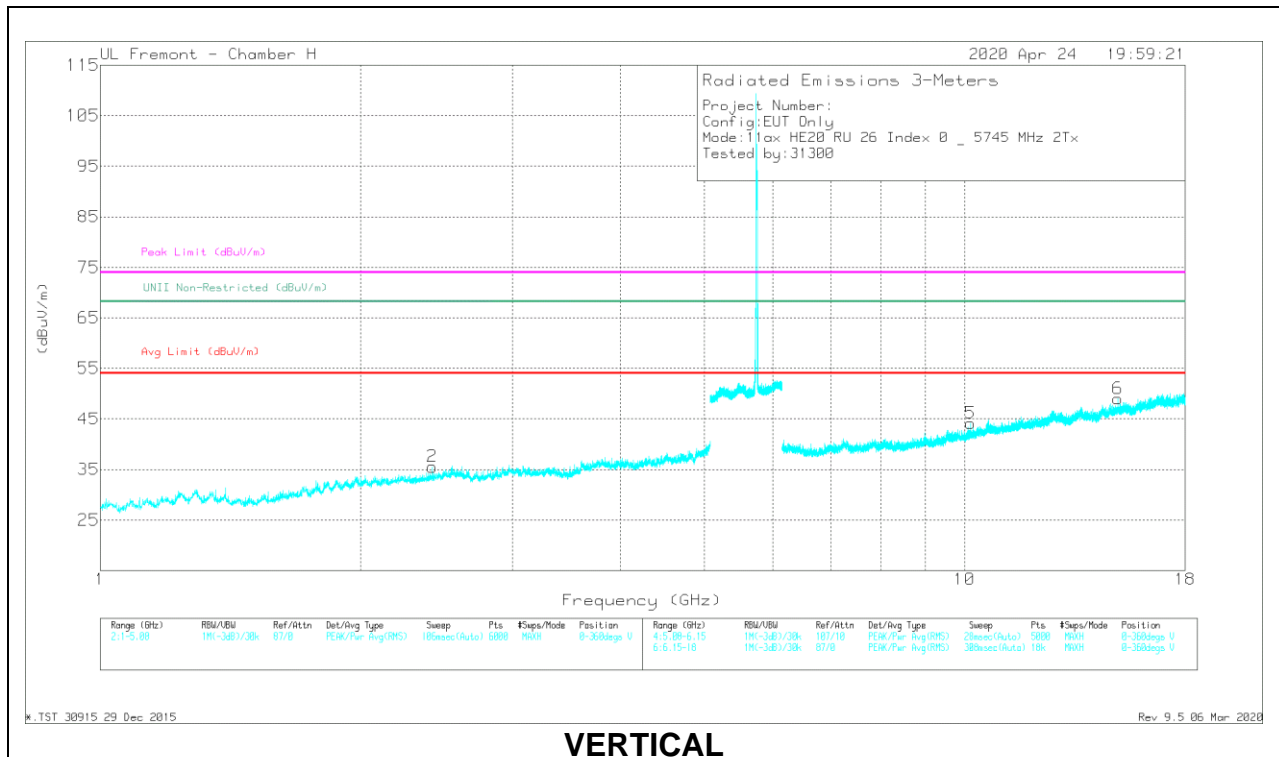

**VERTICAL**

**RADIATED EMISSIONS**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.88147	42.61	PK-U	32.5	-33.1	42.01	-	-	74	-31.99	-	-	0	101	H
	* 2.88103	30.9	ADR	32.5	-33.1	30.3	54	-23.7	-	-	-	-	0	101	H
3	* 9.35056	37.83	PK-U	36.5	-25.6	48.73	-	-	74	-25.27	-	-	60	101	H
	* 9.35008	26.4	ADR	36.5	-25.6	37.3	54	-16.7	-	-	-	-	60	101	H
2	2.4229	43	PK-U	32.3	-33.9	41.4	-	-	-	-	68.2	-26.8	20	101	V
5	10.15584	37.36	PK-U	37.1	-24.7	49.76	-	-	-	-	68.2	-18.44	33	101	V
4	13.60123	38.06	PK-U	39.8	-23	54.86	-	-	-	-	68.2	-13.34	23	101	H
6	15.05282	37.12	PK-U	40.5	-22.4	55.22	-	-	-	-	68.2	-12.98	78	101	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### MID CHANNEL RESULTS

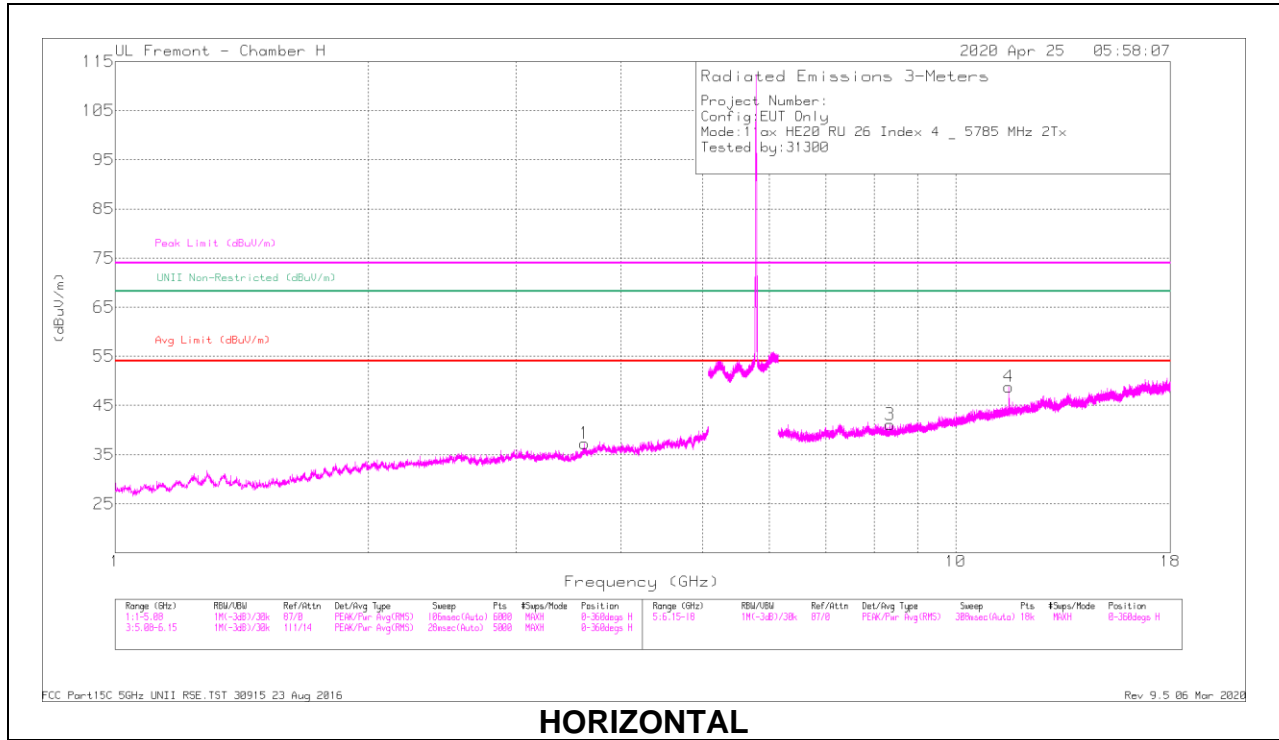

### HORIZONTAL

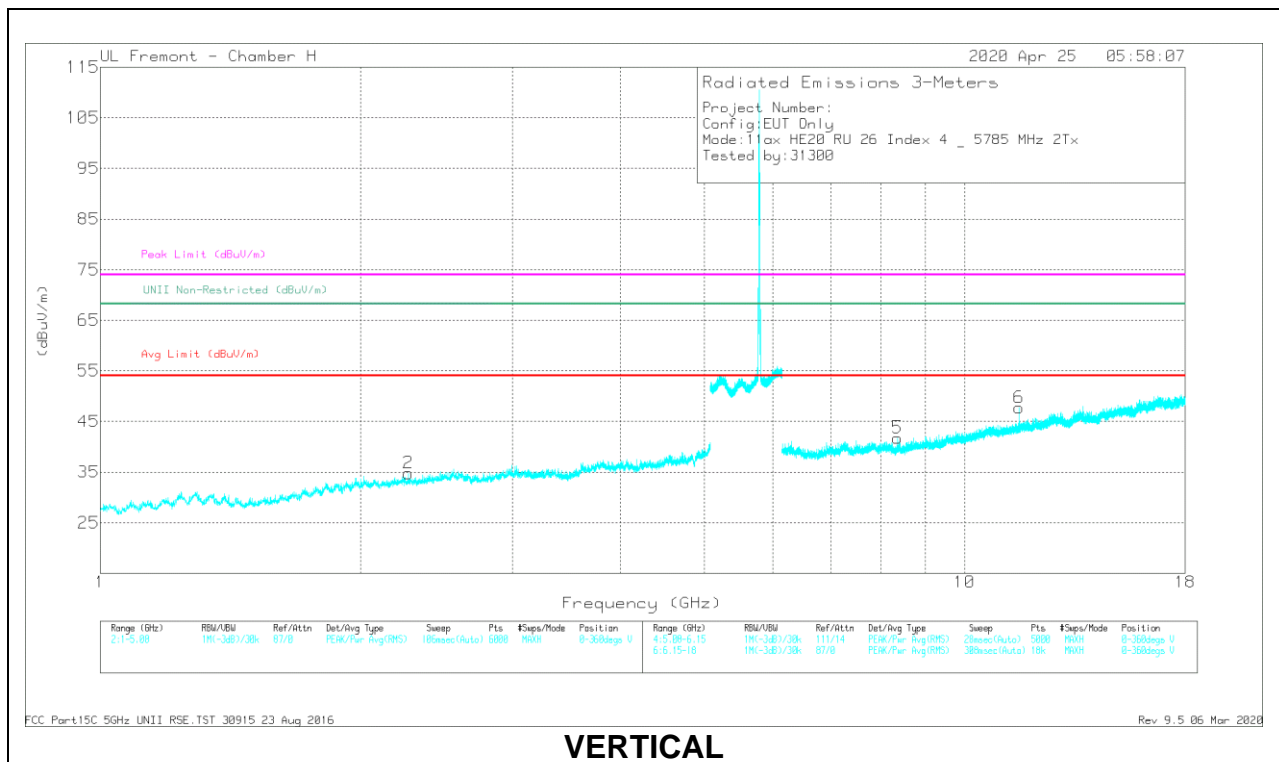

### VERTICAL

**RADIATED EMISSIONS**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.61526	42.7	PK-U	33.1	-32.4	43.4	-	-	74	-30.6	-	-	0	101	H
	* 3.61819	31.88	ADR	33.1	-32.4	32.58	54	-21.42	-	-	-	-	0	101	H
2	* 2.27316	43.3	PK-U	31.9	-33.8	41.4	-	-	74	-32.6	-	-	5	101	V
	* 2.27248	31.41	ADR	31.9	-33.8	29.51	54	-24.49	-	-	-	-	5	101	V
3	* 8.34822	39.25	PK-U	36	-27.1	48.15	-	-	74	-25.85	-	-	0	101	H
	* 8.34576	26.82	ADR	36	-27.1	35.72	54	-18.28	-	-	-	-	0	101	H
4	* 11.5693	40.64	PK-U	38.3	-23.8	55.14	-	-	74	-18.86	-	-	208	199	H
	* 11.5697	30.76	ADR	38.3	-23.8	45.26	54	-8.74	-	-	-	-	208	199	H
5	* 8.36492	39.08	PK-U	36	-27	48.08	-	-	74	-25.92	-	-	230	101	V
	* 8.36381	26.67	ADR	36.1	-27	35.77	54	-18.23	-	-	-	-	230	101	V
6	* 11.5699	37.49	PK-U	38.3	-23.8	51.99	-	-	74	-22.01	-	-	199	228	V
	* 11.5702	26.58	ADR	38.3	-23.8	41.08	54	-12.92	-	-	-	-	199	228	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL RESULTS

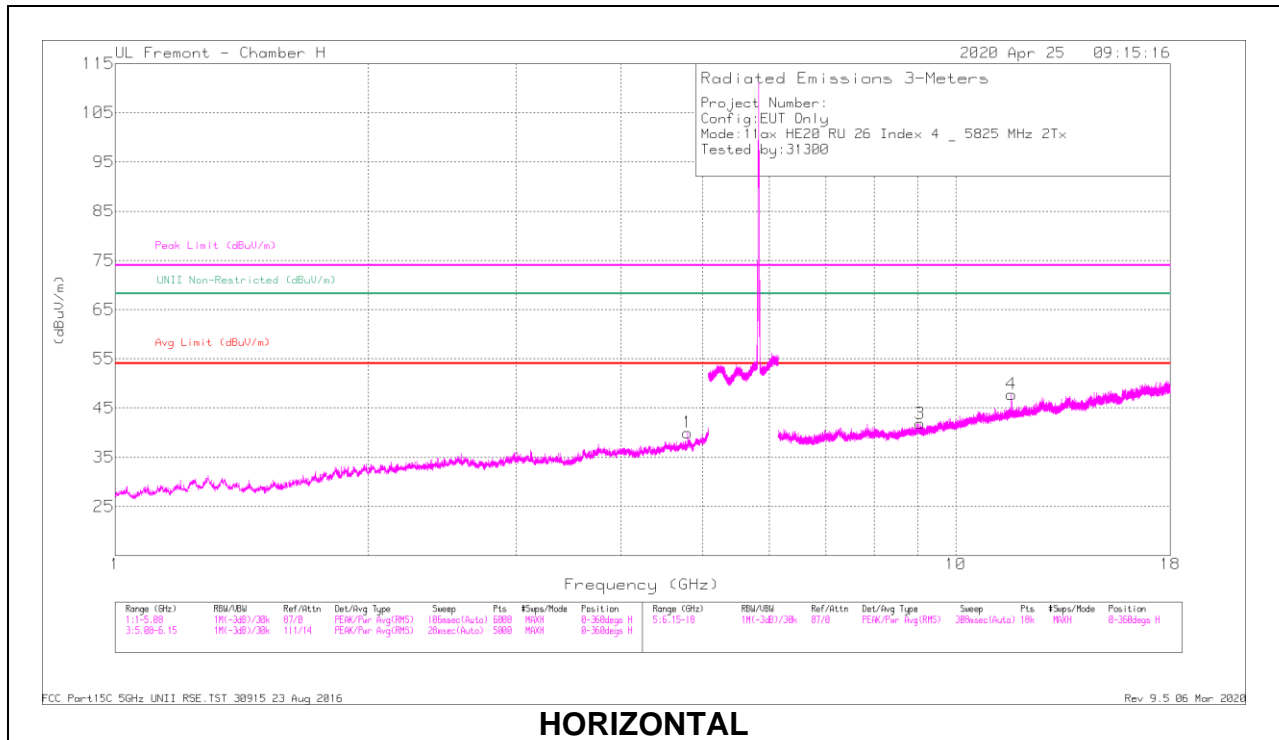

### HORIZONTAL

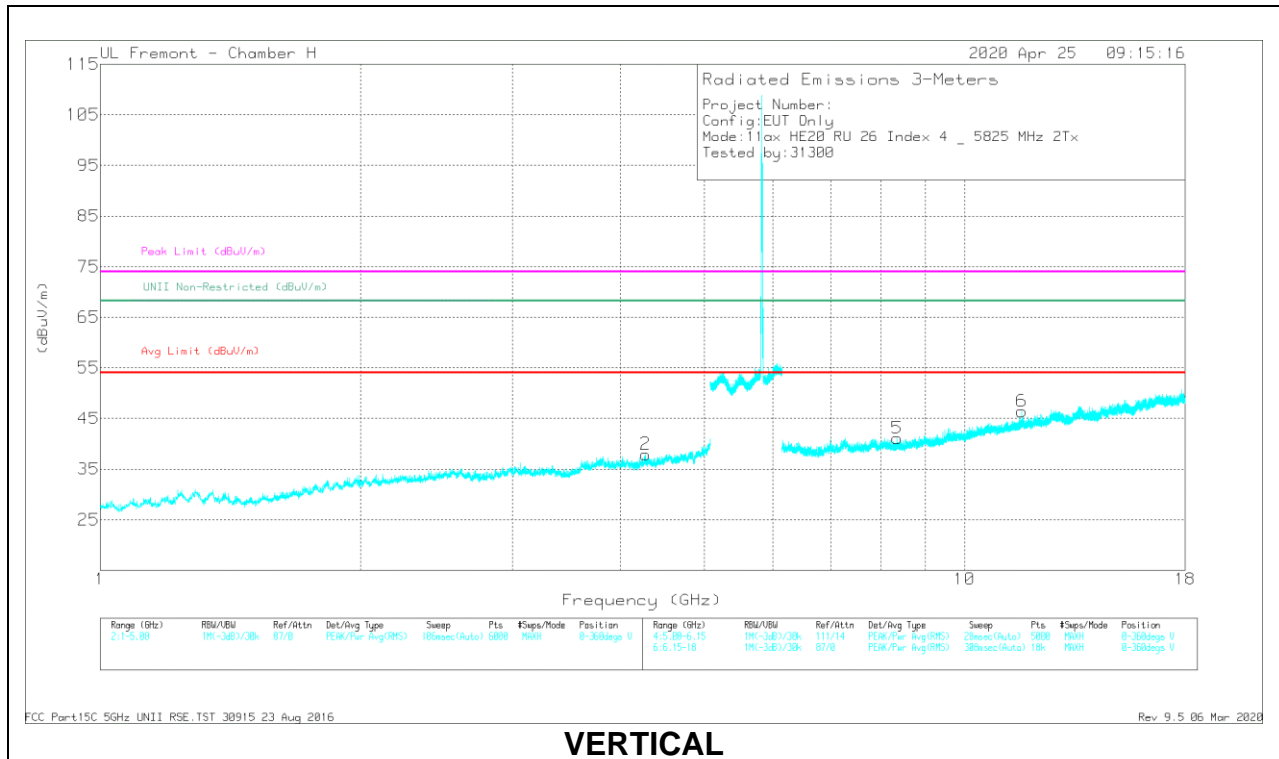

### VERTICAL

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.80127	42.54	PK-U	34.4	-30.9	46.04	-	-	74	-27.96	-	-	0	101	H
	* 4.80143	31.2	ADR	34.4	-30.9	34.7	54	-19.3	-	-	-	-	0	101	H
2	* 4.27665	42.41	PK-U	33.5	-30.9	45.01	-	-	74	-28.99	-	-	31	101	V
	* 4.27353	30.64	ADR	33.5	-30.9	33.24	54	-20.76	-	-	-	-	31	101	V
3	* 9.07232	37.62	PK-U	36.2	-25.7	48.12	-	-	74	-25.88	-	-	68	198	H
	* 9.0699	26.51	ADR	36.2	-25.6	37.11	54	-16.89	-	-	-	-	68	198	H
4	* 11.6484	40.22	PK-U	38.4	-23.6	55.02	-	-	74	-18.98	-	-	165	214	H
	* 11.6502	29.18	ADR	38.4	-23.7	43.88	54	-10.12	-	-	-	-	165	214	H
5	* 8.35572	38.55	PK-U	36	-27	47.55	-	-	74	-26.45	-	-	100	101	V
	* 8.35571	27.26	ADR	36	-27	36.26	54	-17.74	-	-	-	-	100	101	V
6	* 11.6481	38.11	PK-U	38.4	-23.6	52.91	-	-	74	-21.09	-	-	144	347	V
	* 11.6486	26.53	ADR	38.4	-23.7	41.23	54	-12.77	-	-	-	-	144	347	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average




**1.1.23. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.8 GHz BAND**

**ANTENNA 6 – 484 Tones, RU Index 65**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

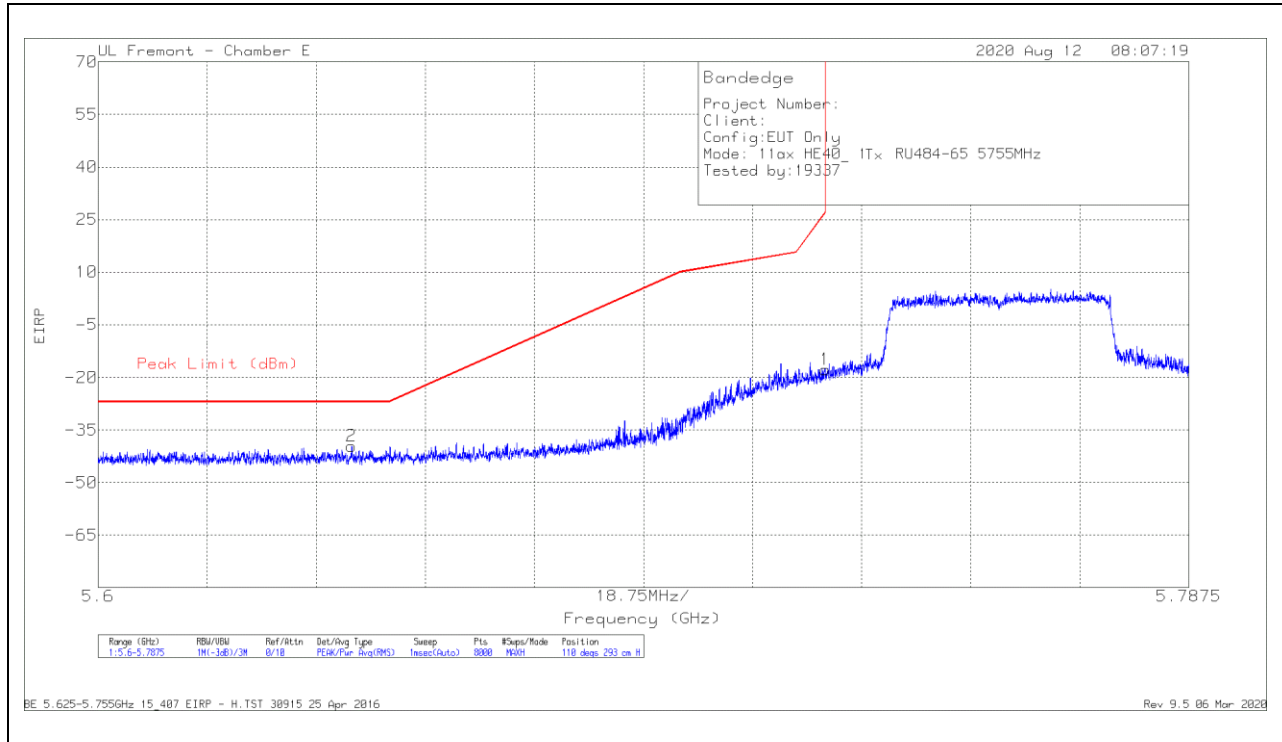

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6436	-64.54	Pk	34.8	-21.6	11.8	-39.54	-27	-12.54	110	293	H
1	5.72498	-43.16	Pk	34.7	-21.2	11.8	-17.86	26.96	-44.82	110	293	H

Pk - Peak detector

### VERTICAL RESULT

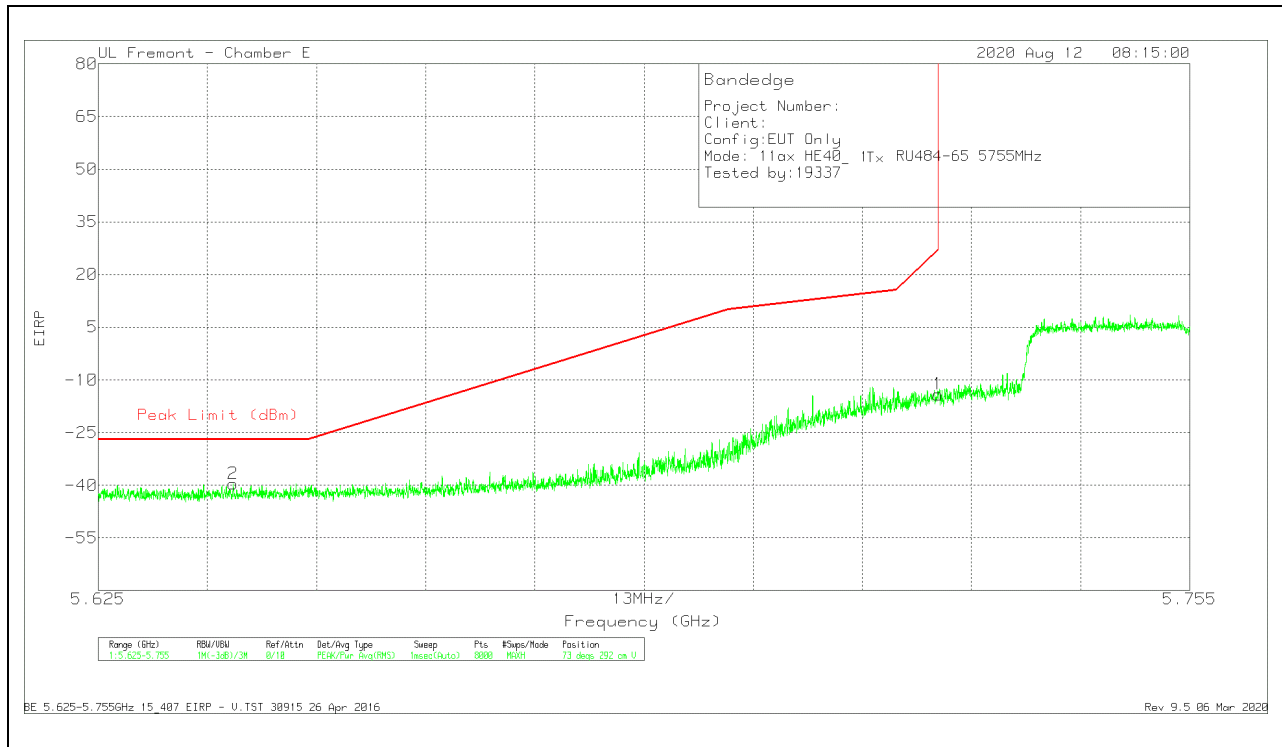


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64107	-64.5	Pk	34.7	-21.6	11.8	-39.6	-27	-12.6	73	292	V
1	5.725	-39.46	Pk	34.7	-21.2	11.8	-14.16	27	-41.16	73	292	V

Pk - Peak detector

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

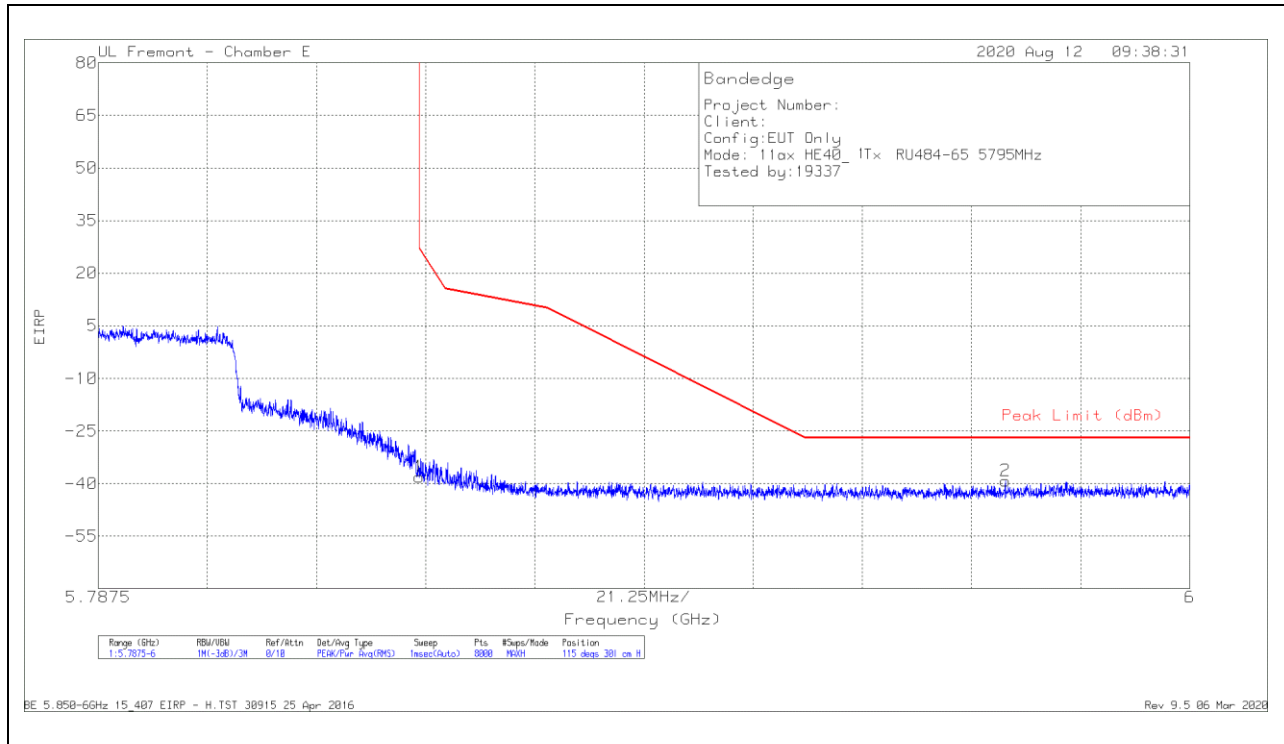

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-64.19	Pk	34.9	-20.7	11.8	-38.19	26.98	-65.17	115	301	H
2	5.96411	-65.36	Pk	35.2	-20.9	11.8	-39.26	-27	-12.26	115	301	H

Pk - Peak detector

### VERTICAL RESULT

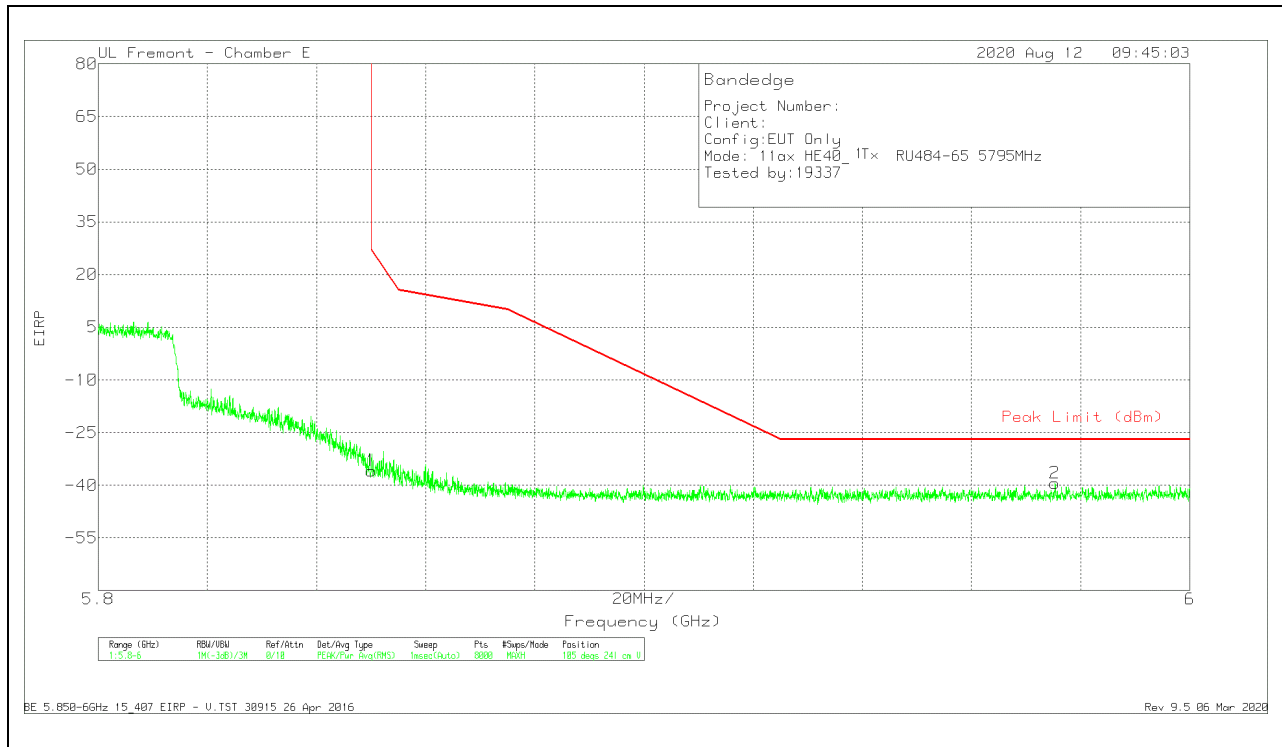

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Filtr/PA d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-61.82	Pk	34.9	-20.7	11.8	-35.82	26.99	-62.81	105	241	V
2	5.97532	-65.56	Pk	35.2	-20.9	11.8	-39.46	-27	-12.46	105	241	V

Pk - Peak detector