



TEST REPORT

Report Number : 13583990-E7V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

Model : A2626, A2628, A2629 AND A2630

Brand : APPLE

FCC ID : BCG-E3996A, BCG-E4029A, AND BCG-E4030A

IC : 579C-E3996A, 579C-E4029A, AND 579C- E4030A

EUT Description : SMARTPHONE

Test Standard(s) : FCC CFR47 PART 22H, 24E, 27L, AND 90S
ISED RSS-GEN ISSUE 5, RSS-132 ISSUE 3, RSS-133 ISSUE 6, AND RSS-139 ISSUE 3

Date Of Issue:
AUGUST 11, 2021

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888






Revision History

Rev.	Issue Date	Revisions	Revised By
V1	08/04/2021	Initial Review	Sintia Andrean
V2	08/11/2021	Updated Section 5 according to TCB Feedback. Removed reference to setup photos, as that is covered by referenced report in appendix A.	Sintia Andrean

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
4.1. METROLOGICAL TRACEABILITY	6
4.2. DECISION RULES	6
4.3. MEASUREMENT UNCERTAINTY	6
4.4. SAMPLE CALCULATION	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. INTRODUCTION	7
5.3. MODEL DIFFERENCES	7
5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2626	8
5.5. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2628	8
5.6. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2629 AND A2630	9
5.7. REFERENCE DETAIL	9
5.8. SOFTWARE AND FIRMWARE	10
5.9. SPOT CHECK WORST-CASE CONFIGURATION AND MODE	10
5.10. DESCRIPTION OF TEST SETUP	11
6. TEST AND MEASUREMENT EQUIPMENT	13
Appendix A – Reference Test Report	14

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC. 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A	
Model	A2626, A2628, A2629 AND A2630	
Brand	APPLE	
FCC ID	BCG-E3996A, BCG-E4029A, AND BCG-E4030A	
IC	579C-E3996A, 579C-E4029A, AND 579C- E4030A	
EUT Description	SMARTPHONE	
Serial Number	MODEL A2626: C7H118300270MMP3U (CONDUCTED) AND GL7773TTW6 (RADIATED) MODEL A2628: C7H1233003L10VV3E (CONDUCTED) AND DF4P9G7TYJ (RADIATED) MODEL A2630: C7H1233004V10VV32 (CONDUCTED) AND JQF2CDT909 (RADIATED)	
Sample Receipt Date	MAY 26, 2021	
Date Tested	MAY 26, 2021 to JULY 30, 2021	
Applicable Standards	FCC CFR 47 Part 2, Part 22, Part 24, Part 27 and Part 90 ISED RSS-Gen Issue 5, RSS-132 Issue 3, RSS-133 Issue 6, RSS-139 Issue 3.	
Test Results	COMPLIES	
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.</p> <p>This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.</p>		
Approved & Released By:	Reviewed By:	Prepared By:
		
Mengistu Mekuria Lead Test Engineer UL Verification Services Inc.	Sintia Andrian Laboratory Engineer UL Verification Services Inc.	John Thompson Laboratory Engineer UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 22, Part 24, Part 27 and Part 90
- [FCC KDB 971168 D01 v03r01](#): Power Meas License Digital Systems
- [FCC KDB 971168 D02 v02r01](#): Misc Rev Approv License Devices
- [FCC KDB 412172 D01 v01r01](#): Determining ERP and EIRP
- ISED RSS-Gen Issue 5, RSS-132 Issue 3, RSS-133 Issue 6, RSS-139 Issue 3.

3. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	208313
<input checked="" type="checkbox"/>	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA	US0104	22541	208313
<input type="checkbox"/>	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA	US0104	2324B	208313

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB
Occupied Channel Bandwidth	±1.22 %
Temperature	±2.26%
Supply voltages	±0.57 %
Time	±3.39 %

Uncertainty figures are valid to a confidence level of 95%.

4.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, and NFC. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is fully not user accessible.

CDMA BC10 band is supported in USA only.

5.2. INTRODUCTION

This application for certification is leveraging the data reuse procedures from KDB 484596 D01 based on reference FCC ID: BCG-E3994A / IC: 579C-E3994A to cover variant model FCC ID: BCG-E3996A / IC ID: 579C-E3996A, FCC ID: BCG-E4029A / IC ID: 579C-E4029A, AND FCC ID: BCG-E4030A / IC: 579C-E4030A. The major difference between the parent/reference model and the variant model is the depopulation in the variant model of the mmWave transmitter, and some LTE and 5G NR Bands. All other circuitry and features are identical. The data reuse test plan was approved via manufacturer KDB inquiry.

5.3. MODEL DIFFERENCES

The manufacturer hereby declares the following for models A2481, A2626, A2628, A2629 and A2630.

A2481, A2626, A2628, A2629, and A2630 are highly similar, with the only differences being listed on the table below:

Model	FCC ID	IC ID	Model Changes
A2481	BCG-E3994A	579C-E3994A	Main Reference Model
A2626	BCG-E3996A	579C-E3996A	FR2 removed
A2628	BCG-E4029A	579C-E4029A	FR2 and B14/71 removed
A2629*	BCG-E4030A	579C-E4030A	FR2 and B14/71 removed
A2630	BCG-E4030A	579C-E4030A	FR2 and B14/71 removed

*Note: Model only support (pSIM + pSIM) instead of (pSIM + eSIM). A2629 is electrically identical to A2630.

They have the same PCB layout, design, common components, antennas, antenna locations and housing cases.

More specifically, their cellular modem, Wi-Fi, BT, NFC, WPT and UWB transmitters are identical, and removal of cellular bands is done by software and depopulation of band-specific components associated with the removed bands.

Spot check verification has been done on model A2626, A2628, A2629, and A2630 in accordance with the test plan approved via KDB inquiry. Comparison of the models, upper deviation is within 3dB range and all tests are under FCC/ISED Technical Limits. The results documented for model A2481 may be applied as representative to model A2626, A2628, A2629, and A2630.

5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2626

A2626 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A2481	Sub Model: A2626	Delta (dB)	Remarks
			Frequency MHz	FCC ID : BCG-E3994A IC : 579C-E3994A (dBm)	FCC ID: BCG-E3996A IC : 579C-E3996A (dBm)		
GSM 850	GPRS 1 Slot	Cond Power	824-849	33.50	33.50	0	
GSM 1900	GPRS 1 Slot	Cond Power	1850-1910	32.00	32.00	0	
CDMA BC10	1xEVDO Rel A	Cond Power	816-824	25.70	25.70	0	
CDMA BC0	1xEVDO Rel 0	Cond Power	824-849	22.50	22.50	0	
CDMA BC1	1xEVDO Rel 0	Cond Power	1850-1910	25.70	25.70	0	
WCDMA B5	REL 99	Cond Power	824-849	25.70	25.70	0	
WCDMA B2	REL 99	Cond Power	1850-1910	25.70	25.70	0	
WCDMA B4	REL 99	Cond Power	1710-1755	25.70	25.70	0	

5.5. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2628

A2628 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A2481	Sub Model: A2628	Delta (dB)	Remarks
			Frequency MHz	FCC ID : BCG-E3994A IC : 579C-E3994A (dBm)	FCC ID: BCG-E4029A IC : 579C-E4029A (dBm)		
GSM 850	GPRS 1 Slot	Cond Power	824-849	33.50	33.50	0	
GSM 1900	GPRS 1 Slot	Cond Power	1850-1910	32.00	32.00	0	
CDMA BC10	1xEVDO Rel 0	Cond Power	816-824	25.70	25.70	0	
CDMA BC0	1xEVDO Rel A	Cond Power	824-849	22.50	22.50	0	
CDMA BC1	1xEVDO Rel A	Cond Power	1850-1910	25.70	25.70	0	
WCDMA B5	REL 99	Cond Power	824-849	25.70	25.70	0	
WCDMA B2	REL 99	Cond Power	1852.4	25.70	25.70	0	
WCDMA B4	REL 99	Cond Power	1732.6	25.70	25.70	0	

5.6. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2629 AND A2630

A2629 AND A2630 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A2481	Sub Model: A2629 and A2630	Delta (dB)	Remarks
			Frequency MHz	FCC ID : BCG-E3994A IC : 579C-E3994A (dBm)	FCC ID: BCG-E4030A IC : 579C-E4030A (dBm)		
GSM 850	GPRS 1 Slot	Cond Power	824-849	33.50	33.50	0	
GSM 1900	GPRS 1 Slot	Cond Power	1850-1910	32.00	32.00	0	
CDMA BC10	1xEVDO Rel A	Cond Power	816-824	25.70	25.70	0	
CDMA BC0	1xEVDO Rel 0	Cond Power	824-849	22.50	22.50	0	
CDMA BC1	1xEVDO Rel 0	Cond Power	1850-1910	25.70	25.70	0	
WCDMA B5	REL 99	Cond Power	824-849	25.70	25.70	0	
WCDMA B2	REL 99	Cond Power	1850-1910	25.70	25.70	0	
WCDMA B4	REL 99	Cond Power	1710-1755	25.70	25.70	0	

5.7. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID / IC ID	Reference Application	Report Title/Section
PCE, TNE	BCG-E3994A/ 579C-E3994A	13573777-E7	FCC_IC 2G/3G Report / All Sections

5.8. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.21.02-1.

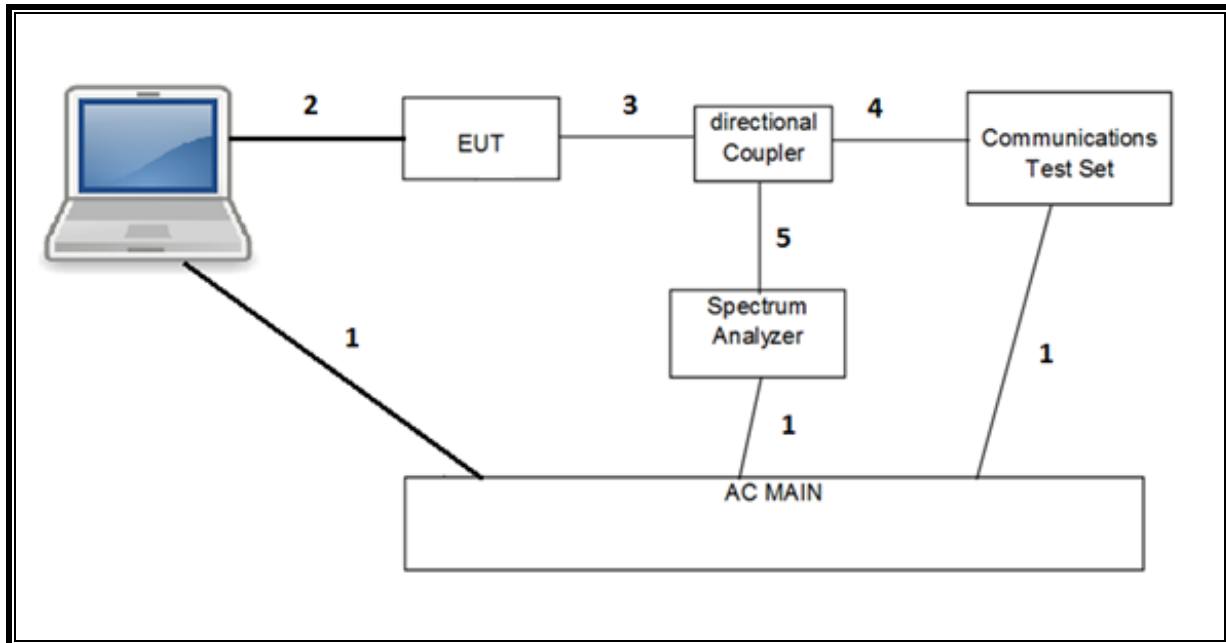
5.9. SPOT CHECK WORST-CASE CONFIGURATION AND MODE

The spot checks were performed on the worst case configurations based on the parent model of reference report.

5.10. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	MacBook Pro	C02VD7SAH22		BCGA1708
AC/DC adapter		Apple	A1718	C4H714302LCGN8RA5		-
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	DC	Un-shielded	1.0	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A

CONDUCTED SETUP



6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Power Meter, P-series single channel	Keysight Technologies Inc.	N1912A	T1245	01/21/2022
Power Sensor, P-series 50MHz to 18GHz	Keysight Technologies Inc.	N1921A	T1226	02/19/2022
Wideband Radio Communications Tester	Rohde & Schwarz (Koeln) GmbH & Co. KG	CMW500	T964	02/21/2022
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc.	N9030A	T905	01/28/2022
Directional Coupler	KRYTAR	152613	T1536	09/16/2021
UL AUTOMATION SOFTWARE				
CLT Software	UL	UL RF	Ver 3.1.4 April 13, 2021	
Power Measurement Software	UL	UL RF	Ver 2.9.4 April 1, 2021	

NOTES:

- * Testing is completed before equipment expiration date.

Appendix A – Reference Test Report

Attached is the test report (13573777-E7) containing the reference data from the parent model as detailed in section 5.5.