



# TEST REPORT

**Report Number :** 13583999-E10V3

**Applicant :** APPLE, INC  
1 APPLE PARK WAY  
CUPERTINO, CA 95014, U.S.A.

**Model :** A2631, A2633, A2634, AND A2635

**Brand :** APPLE

**FCC ID :** BCG-E3999A, BCG-E4031A, AND BCG-E4032A

**EUT Description :** SMARTPHONE

**Test Standard(s) :** FCC CFR 47 Part 2, Part 22, Part 27 and Part 96

**Date Of Issue:**  
AUGUST 11, 2021

**Prepared by:**  
UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 319-4000  
FAX: (510) 661-0888




Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	8/3/2021	Initial Review	Sintia Andrean
V2	8/09/2021	Updated Section 5 according to TCB Feedback. Removed reference to setup photos, as that is covered by referenced report in appendix A.	Sintia Andrean
V3	8/11/2021	Addressed Feedback TCB on section 5.2	Tony Li

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>4</b>
<b>2. TEST METHODOLOGY</b> .....	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>5</b>
<b>4. DECISION RULES AND MEASUREMENT UNCERTAINTY</b> .....	<b>6</b>
4.1. METROLOGICAL TRACEABILITY.....	6
4.2. DECISION RULES.....	6
4.3. MEASUREMENT UNCERTAINTY.....	6
4.4. SAMPLE CALCULATION.....	6
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>7</b>
5.1. DESCRIPTION OF EUT.....	7
5.2. INTRODUCTION.....	7
5.3. MODEL DIFFERENCES.....	7
5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2631.....	8
5.5. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2633.....	9
5.6. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2634 AND A2635.....	10
5.7. REFERENCE DETAIL.....	11
5.8. SOFTWARE AND FIRMWARE.....	11
5.9. SPOT CHECK WORST-CASE CONFIGURATION AND MODE.....	11
5.10. DESCRIPTION OF TEST SETUP.....	12
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>13</b>
<b>Appendix A – Reference Test Report</b> .....	<b>14</b>

# 1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A.	
Model	A2631, A2633, A2634 AND A2635	
Brand	APPLE	
FCC ID	BCG-E3999A, BCG-E4031A, AND BCG-E4032A	
EUT Description	SMARTPHONE	
Serial Number	MODEL A2631: C07120400H00G4W5 (CONDUCTED) AND TKP2MVNPXL (RADIATED). MODEL A2633: C07120401810X7N3 (CONDUCTED) AND XD0CM63XVL (RADIATED) MODEL A2635: C07112500BR16DT1 (CONDUCTED) AND J9MH5LW5MW (RADIATED)	
Sample Receipt Date	MAY 26, 2021	
Date Tested	MAY 26, 2021 to JULY 02, 2021	
Applicable Standards	FCC CFR 47 Part 2, Part 22, Part 27 and Part 96	
Test Results	COMPLIES	
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.</p> <p>This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.</p>		
Approved & Released By:	Reviewed By:	Prepared By:
		
Mengistu Mekuria Lead Test Engineer UL Verification Services Inc.	Sintia Andrea Laboratory Engineer UL Verification Services Inc.	John Thompson Laboratory Engineer UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 22, Part 27 and Part 96
- [FCC KDB 971168 D01 v03r01](#): Power Meas License Digital Systems
- [FCC KDB 971168 D02 v02r01](#): Misc Rev Approv License Devices
- [FCC KDB 412172 D01 v01r01](#): Determining ERP and EIRP

## 3. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building 1: 47173 Benicia Street, Fremont, California, USA	US0104	2324A	208313
<input checked="" type="checkbox"/>	Building 2: 47266 Benicia Street, Fremont, California, USA	US0104	22541	208313
<input type="checkbox"/>	Building 4: 47658 Kato Rd, Fremont, California, USA	US0104	2324B	208313

## 4. DECISION RULES AND MEASUREMENT UNCERTAINTY

### 4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

### 4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U <sub>Lab</sub>
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB
Occupied Channel Bandwidth	±1.22 %
Temperature	±2.26%
Supply voltages	±0.57 %
Time	±3.39 %

Uncertainty figures are valid to a confidence level of 95%.

### 4.4. SAMPLE CALCULATION

#### RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)  
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

#### MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.  
36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

### 5.2. INTRODUCTION

This application for certification is leveraging the data reuse procedures from KDB 484596 D01 based on reference FCC ID: BCG- E3997A to cover variant model FCC ID: BCG-E3999A, FCC ID: BCG-E4031A, and FCC ID: BCG- E4032A. The major difference between the parent/reference model and the variant model is the depopulation in the variant model of the mmWave transmitter, and some LTE and 5G NR Bands. All other circuitry and features are identical. The data reuse test plan was approved via manufacturer KDB inquiry.

### 5.3. MODEL DIFFERENCES

The manufacturer hereby declares the following for models A2482, A2631, A2633, A2634, and A2635.

A2482, A2631, A2633, A2634, and A2635 are highly similar, with the only differences being listed on the table below:

Model	FCC ID	Model Changes
A2482	BCG-E3997A	Main Reference Model
A2631	BCG-E3999A	FR2 removed
A2633	BCG-E4031A	FR2 and B14/71 removed
A2634*	BCG-E4032A	FR2 and B14/71 removed
A2635	BCG-E4032A	FR2 and B14/71 removed

\*Note: Model only support (pSIM + pSIM) instead of (pSIM + eSIM). A2634 is electrically identical to A2635.

They have the same PCB layout, design, common components, antennas, antenna locations and housing cases.

More specifically, their cellular modem, Wi-Fi, BT, NFC, WPT and UWB transmitters are identical, and removal of cellular bands is done by software and depopulation of band-specific components associated with the removed bands.

Spot check verification has been done on models A2631, A2633, A2634, and A2635 in accordance with the test plan approved via KDB inquiry. Comparison of the models, upper deviation is within 3dB range and all tests are under FCC/ISED Technical Limits. The results documented for model A2482 may be applied as representative to models A2631, A2633, A2634, and A2635.

### 5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2631

A2631 Spotcheck Results							
Technology	Worst Mode	Test Item	Measured	Original Model: A2482	Sub Model: A2631	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID: BCG-E3997A (dBm)	FCC ID: BCG-E3999A (dBm)		
LTE 5CA	QPSK @ 10 MHz +10MHz BW	Cond Power	824-849	25.7	25.69	-0.01	
LTE 7CA	QPSK @ 20 MHz +20MHz BW	Cond Power	2500-2570	25.2	25.2	0.00	
LTE 41CA	QPSK @ 20 MHz +20MHz BW	Cond Power	2496-2690	26.5	26.5	0.00	
LTE 48CA	16QAM @ 20 MHz +20MHz BW	Cond Power	3550-3700	24.2	24.2	0.00	
LTE 66BCA	QPSK @ 10 MHz +10MHz BW	Cond Power	1710-1780	25.2	25.2	0.00	
LTE 66CCA	QPSK @ 20 MHz +20MHz BW	Cond Power	1710-1780	25.2	25.2	0.00	



### 5.5. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2633

A2633 Spotcheck Results							
Technology	Worst Mode	Test Item	Measured	Original Model: A2482	Sub Model: A2633	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID: BCG-E3997A (dBm)	FCC ID: BCG-E4031A (dBm)		
LTE 5CA	QPSK @ 10 MHz +10MHz BW	Cond Power	824-849	25.7	25.7	0.00	
LTE 7CA	QPSK @ 20 MHz +20MHz BW	Cond Power	2500-2570	25.2	25.2	0.00	
LTE 41CA	QPSK @ 20 MHz +20MHz BW	Cond Power	2496-2690	26.5	26.5	0.00	
LTE 48CA	16QAM @ 20 MHz +20MHz BW	Cond Power	3550-3700	24.2	24.2	0.00	
LTE 66BCA	QPSK @ 10 MHz +10MHz BW	Cond Power	1710-1780	25.2	25.2	0.00	
LTE 66CCA	QPSK @ 20 MHz +20MHz BW	Cond Power	1710-1780	25.2	25.2	0.00	

### 5.6. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A2634 AND A2635

A2634 AND A2635 Spotcheck Results							
Technology	Worst Mode	Test Item	Measured	Original Model: A2482	Sub Model: A2634 and A2635	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID: BCG-E3997A (dBm)	FCC ID: BCG-E4032A (dBm)		
LTE 5CA	QPSK @ 10 MHz +10MHz BW	Cond Power	824-849	25.7	25.7	0.00	
LTE 7CA	QPSK @ 20 MHz +20MHz BW	Cond Power	2500-2570	25.2	25.2	0.00	
LTE 41CA	QPSK @ 20 MHz +20MHz BW	Cond Power	2496-2690	26.5	26.5	0.00	
LTE 48CA	16QAM @ 20 MHz +20MHz BW	Cond Power	3550-3700	24.2	24.2	0.00	
LTE 66BCA	QPSK @ 10 MHz +10MHz BW	Cond Power	1710-1780	25.2	25.2	0.00	
LTE 66CCA	QPSK @ 20 MHz +20MHz BW	Cond Power	1710-1780	25.2	25.2	0.00	

## 5.7. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Reference Application	Report Title/Section
PCE, CBE, TNE	BCG-E3997A	13571607-E10	FCC LTE Carrier Aggregation Report / All Sections

## 5.8. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.21.02-1.


## 5.9. SPOT CHECK WORST-CASE CONFIGURATION AND MODE

The spot checks were performed on the worst case configurations based on the parent model of reference report.

### 5.10. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description	Manufacturer	Model	Serial Number	FCC ID/ DoC		
Laptop	Apple	MacBook Pro	C02VD7SAH22	BCGA1708		
AC/DC adapter	Apple	A1718	C4H714302LCGN8RA5			
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	DC	Un-shielded	1.0	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A

### CONDUCTED SETUP

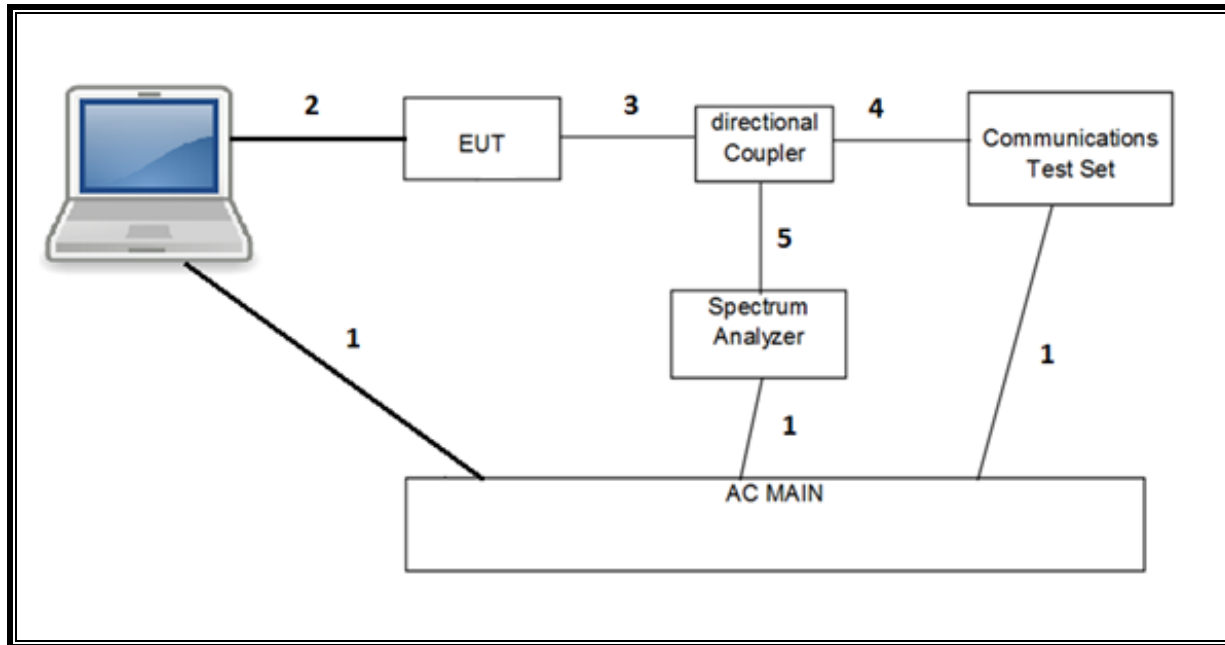

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	T905	1/21/2022
Wideband Radio Communications Tester	Rohde & Schwarz (Koeln) GmbH & Co. KG	CMW500	T964	2/17/2022
Directional Coupler	KRYTAR	152613	T1536	9/16/2021
UL AUTOMATION SOFTWARE				
Power Measurement Software	UL	UL RF	Ver 3.1.2 5/17/2021	

### NOTES:

- \* Testing is completed before equipment expiration date.

## Appendix A – Reference Test Report

Attached is the test report (13571607-E10) containing the reference data from the parent model as detailed in section 5.7.