










5G NR n12 EMISSION MASK

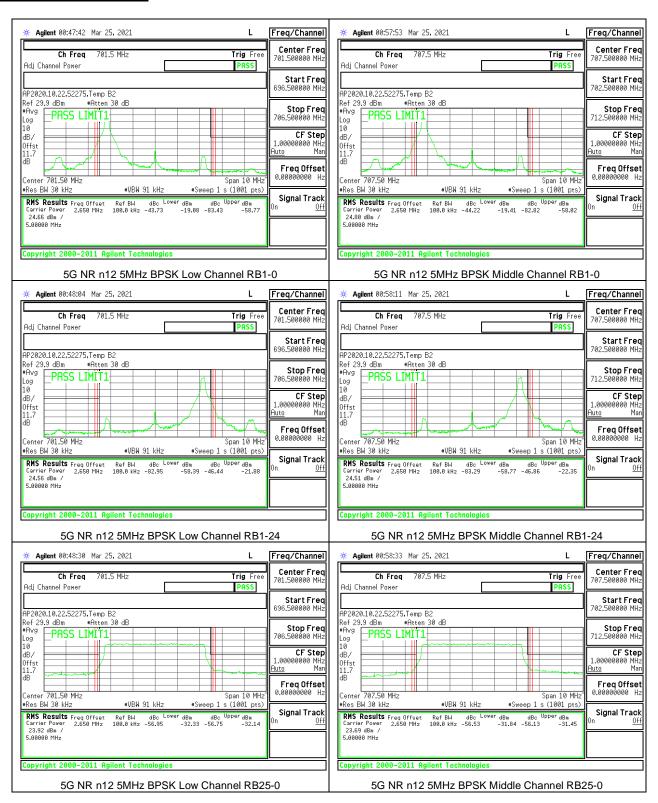

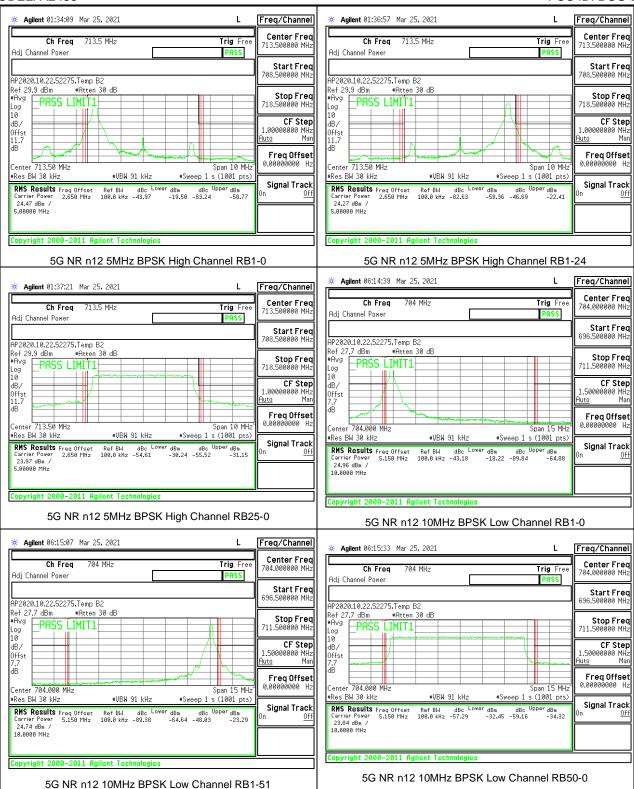

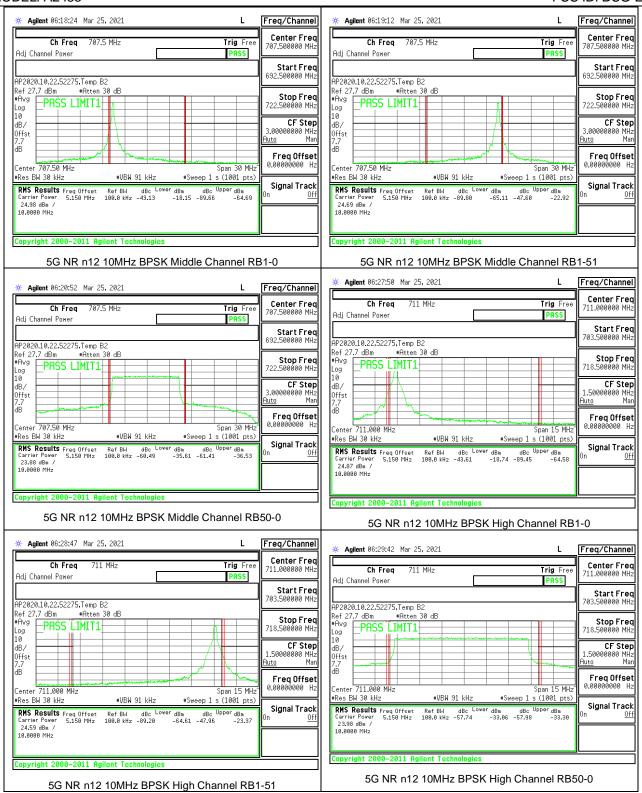

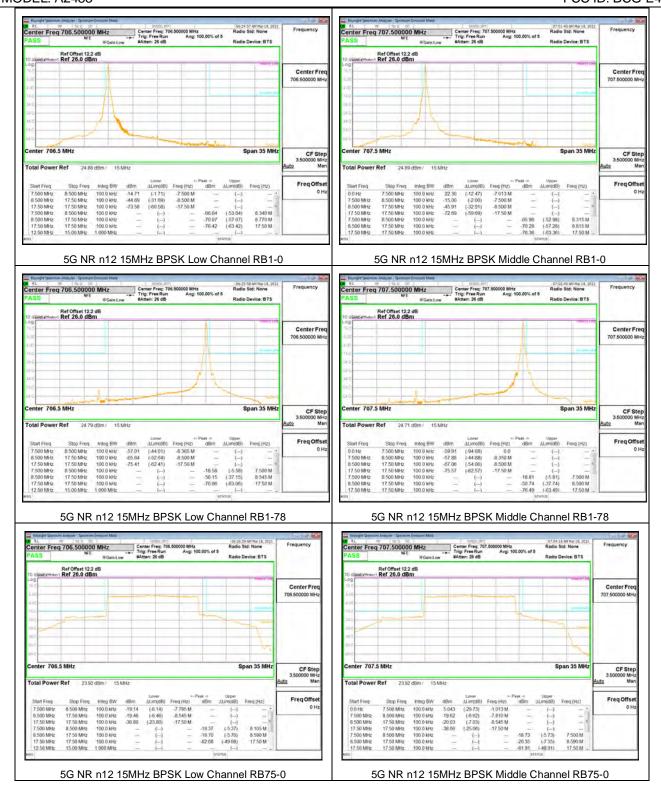

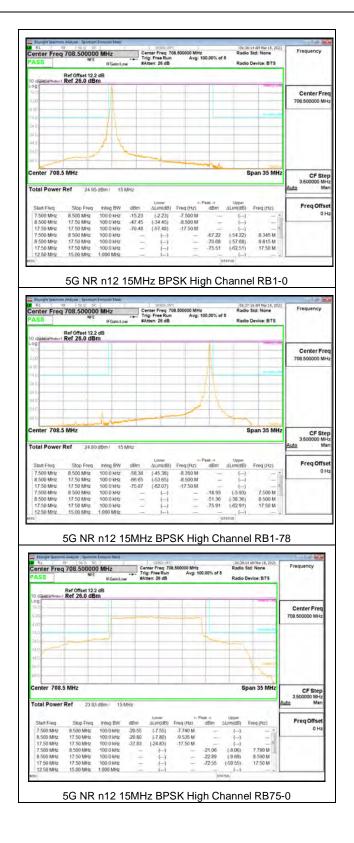



9.2.4. LTE BAND 13 EMISSION MASK

LIMITS

FCC: §27.53

- (c)For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
- (f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40dBm/MHz).

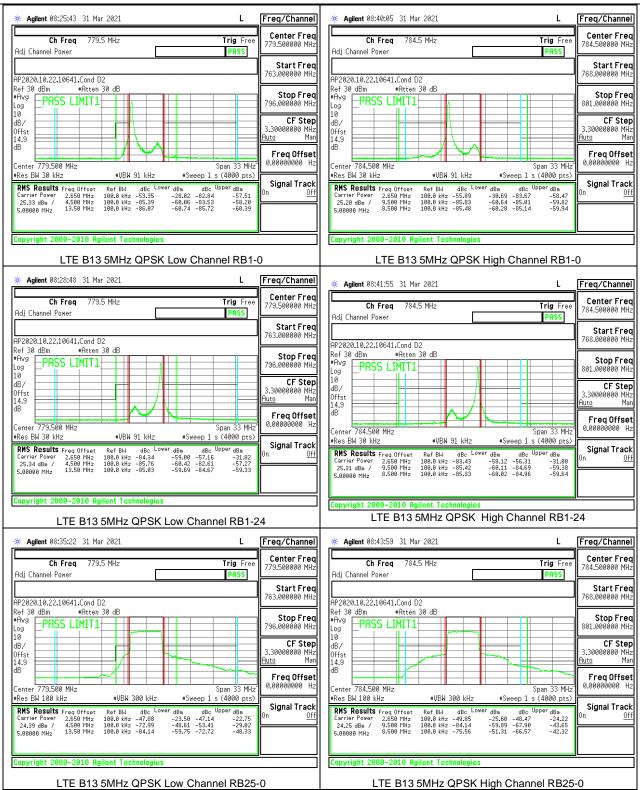

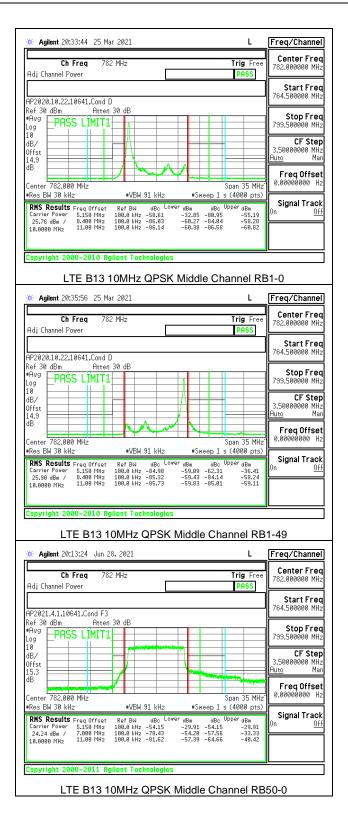

9.2.5. LTE BAND 14 EMISSION MASK

LIMITS

FCC: §90.543 Emission Limitations.

- (e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least 43 + 10 log (P) dB.
- (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
- (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.
- (f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.





Center Freq

Start Freq

CF Step

Freq Offset

Signal Track

LTE B14 10MHz QPSK Middle Channel RB50-0

9.2.6. LTE BAND 17 BANDEDGE

LIMITS

FCC: §27.53

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least 43 + 10 log (P) dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.



REPORT NO: 13571601-E8V3 DATE: AUGUST 04, 2021 EUT MODEL: A2483 FCC ID: BCG-E4000A

9.2.7. LTE BAND 25 AND 5G NR n25 BANDEDGE

LIMITS

FCC: §24.238 (a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

LTE BAND 25 BANDEDGE








DATE: AUGUST 04, 2021 FCC ID: BCG-E4000A

REPORT NO: 13571601-E8V3 EUT MODEL: A2483

5G NR n25 BANDEDGE



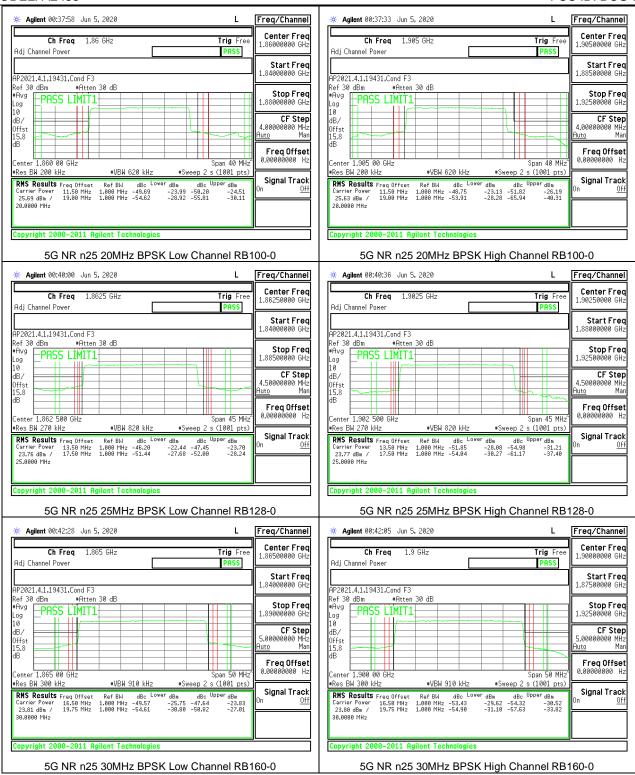


9.2.8. LTE BAND 26 EMISSION MASK (FCC PART 90S)


LIMITS

FCC: §90.691 Emission mask requirements for EA-based systems.

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50 + 10 Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.



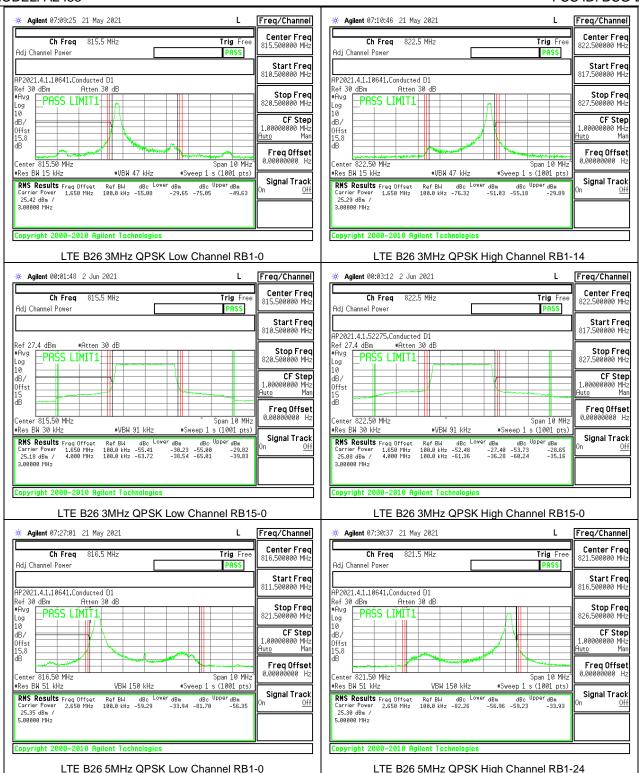

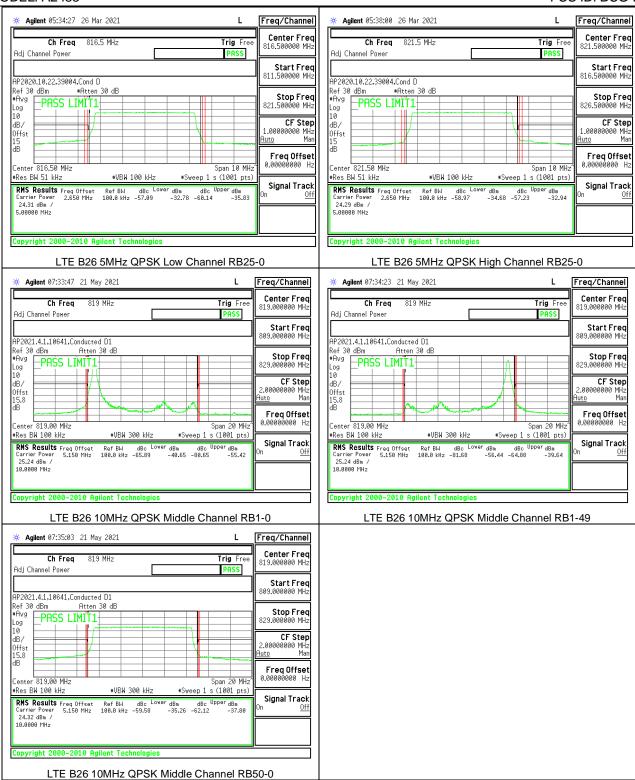

9.2.9. LTE BAND 26 BANDEDGE (FCC PART 22)

LIMITS

FCC: §22.917 (a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.





REPORT NO: 13571601-E8V3 DATE: AUGUST 04, 2021 **EUT MODEL: A2483** FCC ID: BCG-E4000A

LTE BAND 30 AND 5G NR n30 EMISSION MASK


LIMITS


FCC: §27.53

- (a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:
- (4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:
- (i) By a factor of not less than: 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than 55 + 10 log (P) dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than 67 + 10 log (P) dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz;
- (iii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2360 and 2365 MHz, and not less than 70 + 10 log (P) dB above 2365 MHz.


FORM NO: CCSUP4031B


LTE BAND 30 EMISSION MASK

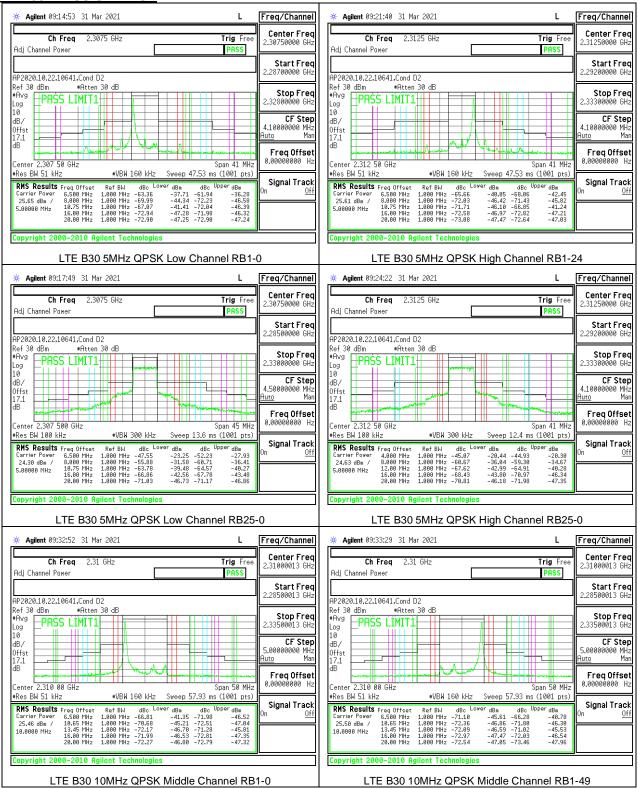


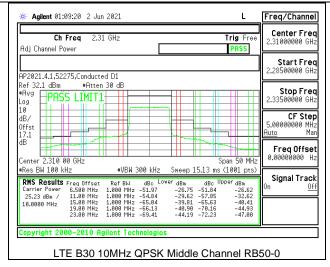


LTE 5G NR n30 EMISSION MASK

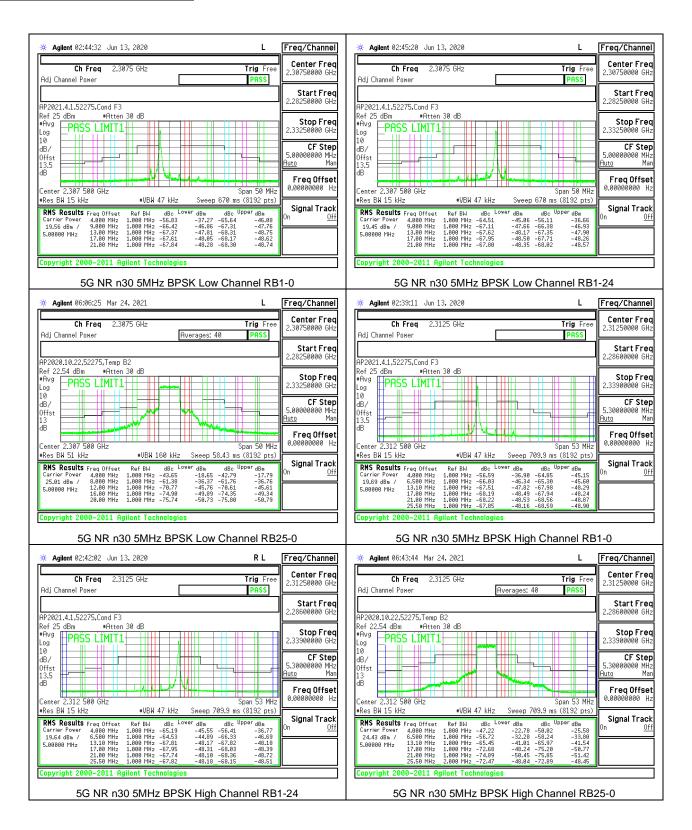

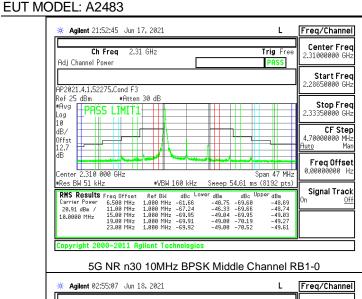

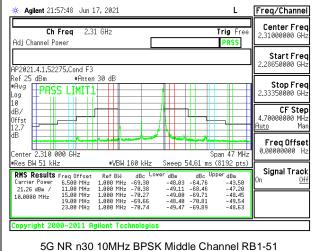

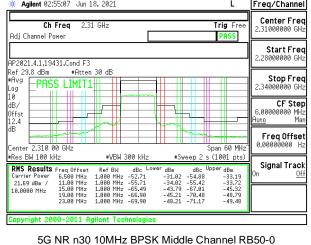

9.2.11. LTE BAND 41 AND 5G NR n41 EMISSION MASK


LIMITS

FCC: §27.53

(m)(4) For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

REPORT NO: 13571601-E8V3 EUT MODEL: A2483


LTE BAND 41 EMISSION MASK (FCC)

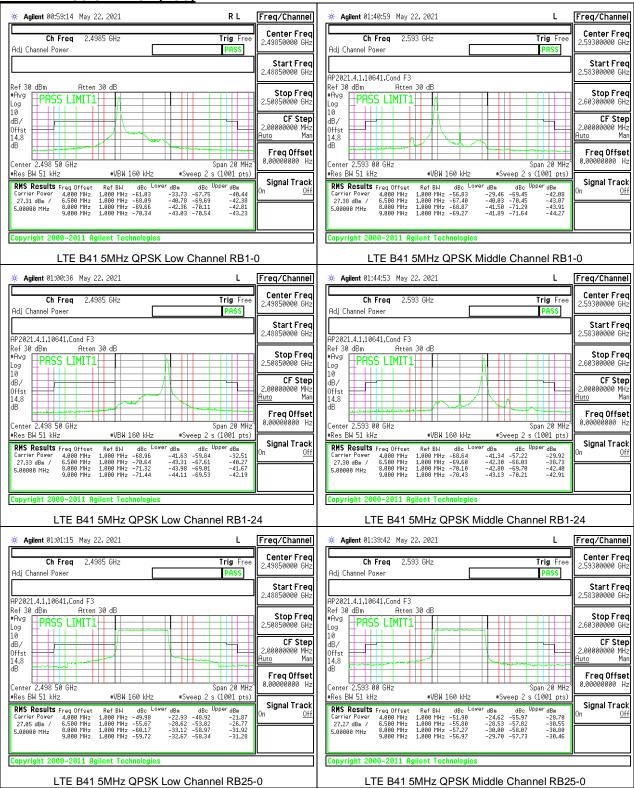







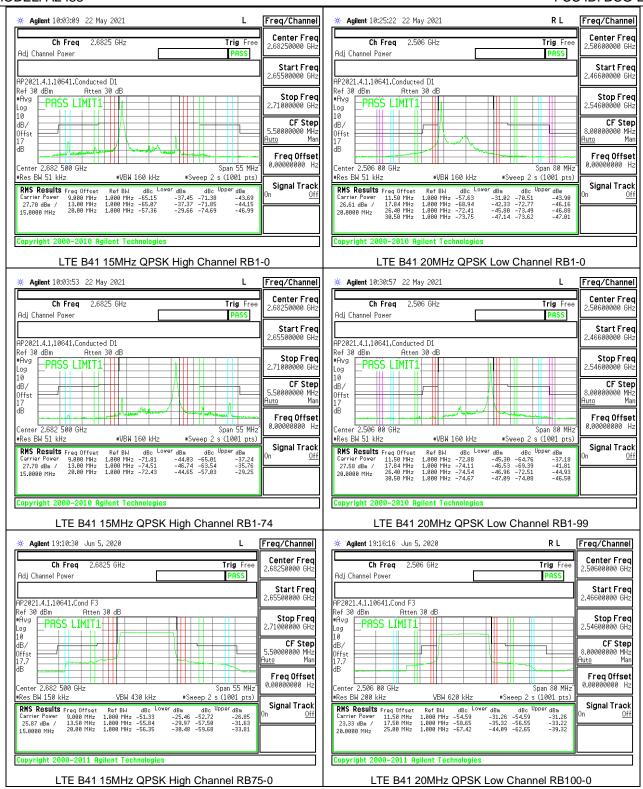





REPORT NO: 13571601-E8V3 EUT MODEL: A2483

5G NR n41 EMISSION MASK



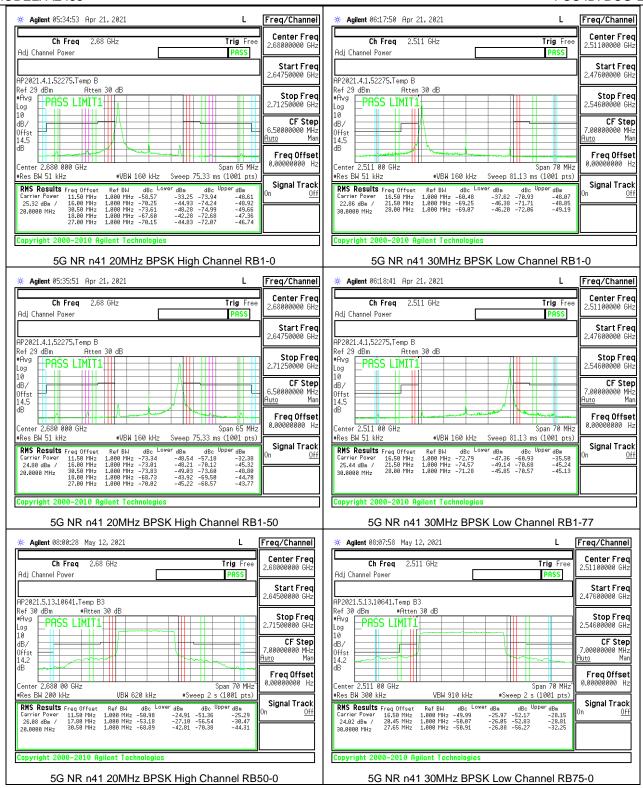

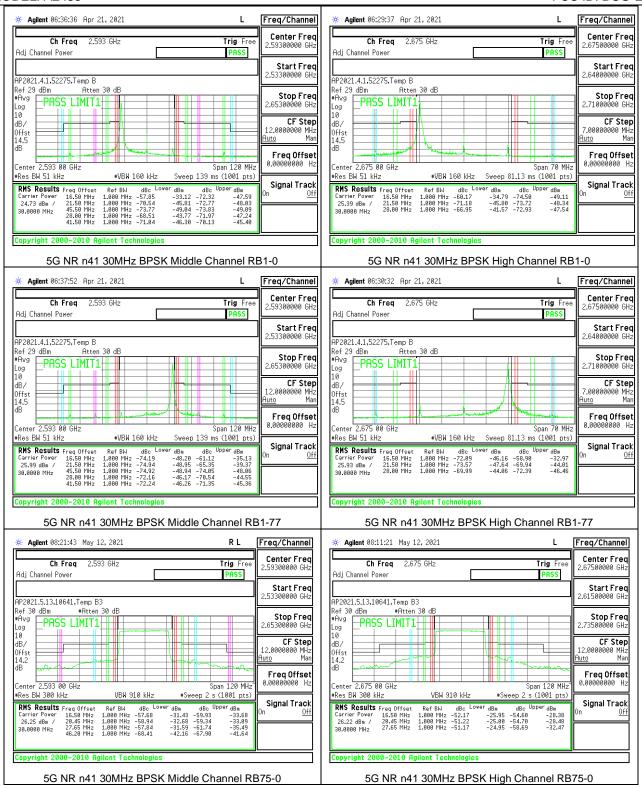











FORM NO: CCSUP4031B









REPORT NO: 13571601-E8V3

EUT MODEL: A2483

DATE: AUGUST 04, 2021

FCC ID: BCG-E4000A

9.2.12. LTE BAND 48 EMISSION MASK AND ADJACENT CHANNEL POWER

LIMITS

FCC: §96.41

- (e) 3.5 GHz Emissions and Interference Limits—
- (1) General protection levels
- (ii) Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.
- (2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

FORM NO: CCSUP4031B

REPORT NO: 13571601-E8V3

EUT MODEL: A2483 LTE BAND 48 EMISSION MASK (FCC) * Agilent 03:45:25 26 Mar 2021 Freq/Channel Agilent 03:58:47 26 Mar 2021 Freq/Channel Center Freq 3.55500000 GHz Center Freq 3.62500000 GHz Ch Freq 3.555 GHz Ch Freq Adj Channel Power PASS Adj Channel Power 3.59500000 GHz 3.52500000 GH: AP2020.10.22,39004,Cond D AP2020.10.22,39004,Cond D Ref 30 dBm #Atten Ref 30 dBm #Avg □□C **Stop Freq** 3.58500000 GHz Stop Freq 3.65500000 GHz PASS LIMIT1 dB/ dB/ 6.00000000 MH 6.000000000 MHz Mai Freq Offset Freq Offset Center 3.625 00 GHz Center 3.555 00 GHz Span 60 MH: Span 60 MH: #VBW 160 kHz #VBW 160 kHz #Res BW 51 kHz #Sween 1 s (1001 pts) #Res BW 51 kHz #Sween 1 s (1001 pts) RMS Results Freq Offset Carrier Power 6.500 MHz 25.22 dBm / 16.00 MHz 26.000 MHz 26.00 MHz Signal Track Signal Track RMS Results Freq Offset Carrier Power 6.500 MHz 25.31 dBm / 16.00 MHz 10.0000 MHz 26.00 MHz Ref BW dBc 1.000 MHz -61.67 1.000 MHz -66.91 1.000 MHz -68.64 dBm dBc -36.45 -67.06 -41.69 -69.09 -43.42 -69.19 dBm -41.84 -43.88 -43.97 dBm -41.08 -43.32 -44.29 1.000 MHz -65.35 1.000 MHz -67.70 1.000 MHz -69.31 Copyright 2000-2010 Agilent Technologies Copyright 2000-2010 Agilent Technologies LTE B48 5MHz QPSK Low Channel RB1-0 LTE B48 5MHz QPSK Middle Channel RB1-0 Freq/Channel Center Freq Ch Freq 3.555 GHz **Trig** Fre Ch Freq 3.625 GHz Trig Fre PASS Adj Channel Power Adj Channel Power PASS Start Freq Start Fred AP2020.10.22,39004,Cond D AP2020.10.22,39004,Cond D Ref 30 dBm ef 30 dBm *Avg PASS LIMIT1 *Avg PASS LIMIT1 CF Step CF Step 6.00000000 MH: 6.00000000 MHz Offst Offst 17.9 17.9 dB ďΒ Freq Offset 0.00000000 Hz Freq Offset 0.00000000 Hz 3.555 00 GHz Span 60 MH 3.625 00 GHz Span 60 MH #Sweep 1 s (1001 pts) #Res BW 51 kHz #VBW 160 kHz #Res BW 51 kHz #VBW 160 kHz #Sweep 1 s (1001 pts) RMS Results Freq Offset Carrier Power 6,500 MHz 25,31 dBm / 16,00 MHz 10,0000 MHz 26,00 MHz Signal Track RMS Results Freq Offset Carrier Power 6.500 MHz 25.53 dBm / 16.00 MHz 10.0000 MHz 26.00 MHz Signal Track dBm dBc -41.06 -65.59 -44.20 -68.28 -44.00 -69.84 Ref BW 1.000 MHz dBm dBc -40.58 -66.29 Ref BW 1.000 MHz 1.000 MHz -69.73 1.000 MHz -69.53 Copyright 2000-2010 Agilent Technologies Copyright 2000-2010 Agilent Technologies LTE B48 5MHz QPSK Low Channel RB1-24 LTE B48 5MHz QPSK Middle Channel RB1-24 * Agilent 03:44:02 26 Mar 2021 L Freg/Channel Agilent 03:57:27 26 Mar 2021 Freg/Channel Center Fred Center Fred Trig Fre Ch Frea 3,555 GHz Ch Frea 3.625 GHz Trig Fre PASS Adj Channel Power Adj Channel Power PASS **Start Freq** 3.52500000 GHz Start Freq 3.59500000 GHz AP2020.10.22,39004,Cond D AP2020.10.22,39004,Cond D Ref 30 dBm #Atten 30 dB Ref 30 dBm #Atten 30 dB Stop Freq 3.58500000 GHz Stop Freq 3.65500000 GHz #Ãvg -PASS LIMIT1 PASS LIMIT1 Log Log CF Step 6.000000000 MHz Cr 3... 6.000000000 MHz Man Offst Freq Offset Freq Offset 3.555 00 GHz 3.625 00 GHz Span 60 MH Span 60 MH Center Center ≢Res BW 200 kHz #VBW 620 kHz \$Sweep 1 s (1001 pts) ≢Res BW 200 kHz #VBW 620 kHz RMS Results Freq Offset Carrier Power 6.500 MHz 25.48 dBm / 16.00 MHz 10.0000 MHz 26.00 MHz Signal Track
 RMS Results
 Freq Offset
 Ref BW
 dBc
 Lower dBm

 Carrier Power
 6.580 MHz
 1.808 MHz
 -54.27
 -28.69

 25.58 dBm /
 16.80 MHz
 1.808 MHz
 -68.33
 -42.75

 10.8000 MHz
 26.80 MHz
 1.808 MHz
 -69.48
 -43.82
 Signal Track
 Ref BW
 dBc
 Lower dBm
 dBc

 1.000 MHz
 -51.01
 -25.53
 -60.68

 1.000 MHz
 -67.21
 -41.73
 -68.45


 1.000 MHz
 -69.16
 -43.67
 -69.61

Copyright 2000-2010 Agilent Technologies

LTE B48 5MHz QPSK Middle Channel RB25-0

Copyright 2000-2010 Agilent Technologies

LTE B48 5MHz QPSK Low Channel RB25-0

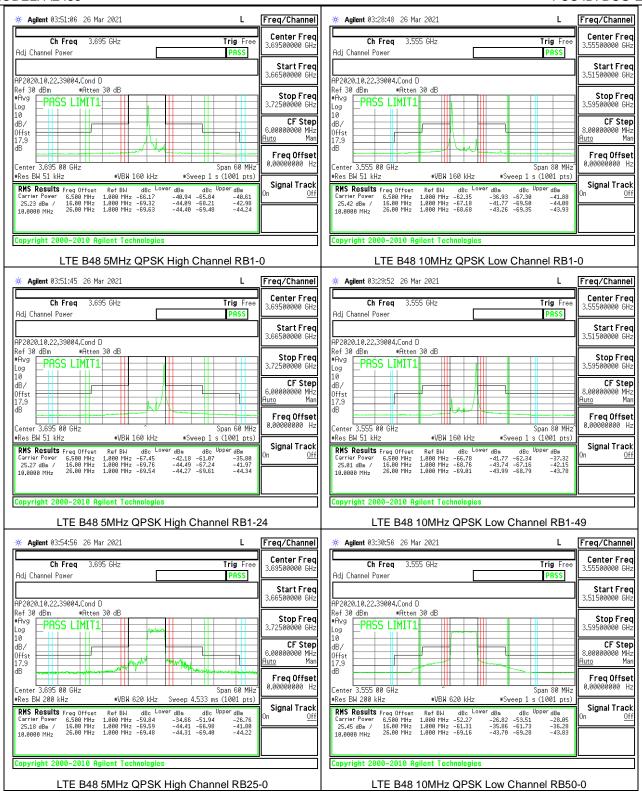












LTE BAND 48 ADJACENT CHANNEL POWER (FCC) Ref Offset 18.4 dB Ref 30.00 dBm -61.0 dBd CF Step 4.000000 14 CF Step 4.000000 1** otal Carrier Power ACP-IBW Freq Offse Freq Offs LTE B48 5MHz QPSK Low Channel RB1-0 LTE B48 5MHz QPSK Middle Channel RB1-0 Center Fre Center Fre -59.4 dB CF Step 4.000000 MHz Man CF Step 4.000000 MH #VBW 300 kHz #VBW 300 kHz Uppe Freq Offse Freq Offs LTE B48 5MHz QPSK Low Channel RB1-24 LTE B48 5MHz QPSK Middle Channel RB1-24 Ref Offset 18.4 dB Ref 30.00 dBm Center Fre Center Fre -56.8 dB -52.3 dBi enter 3.555 GHz Res BW 100 kHz CF Step 4.000000 MHz CF Step 4.000000 MH #VBW 300 kHz ACP-IBW ACP-IBW Freq Offs dBc dBm dBc dBm -4171 -1226 -5678 -2736 dBc dBm dBc dBm -49.25 -20.22 -52.31 -23.27 LTE B48 5MHz QPSK Low Channel RB25-0 LTE B48 5MHz QPSK Middle Channel RB25-0

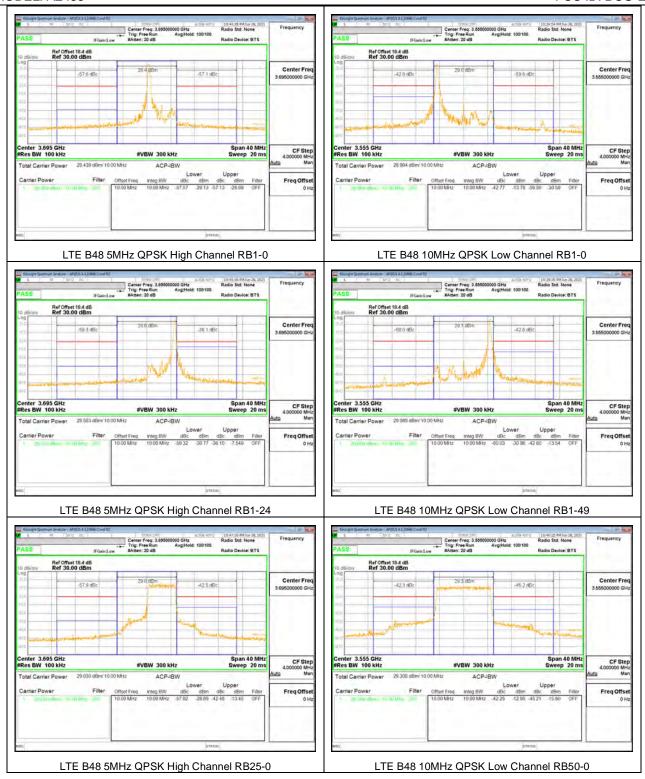


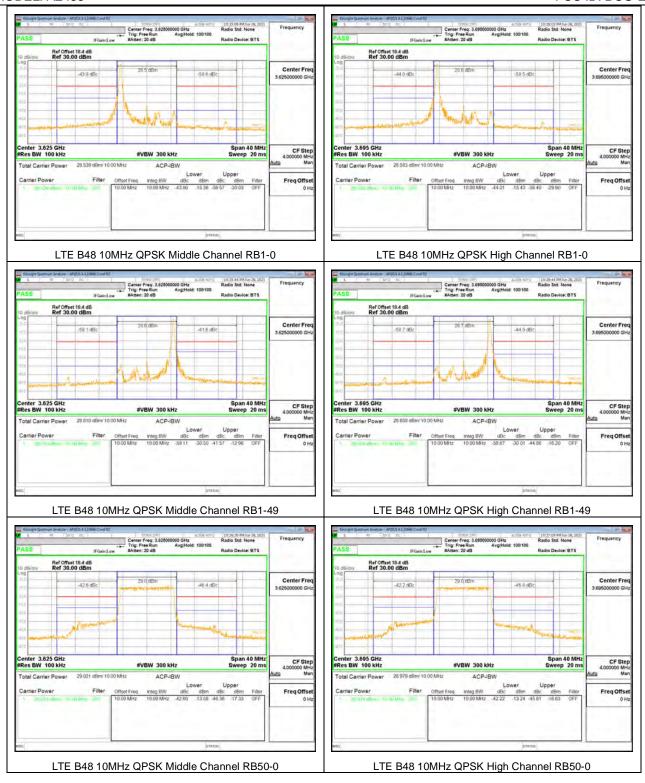


FORM NO: CCSUP4031B

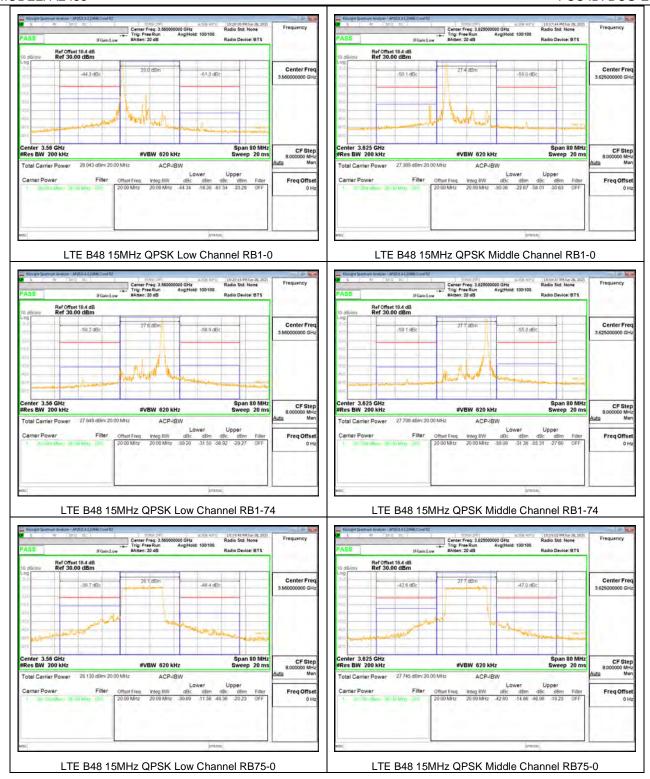

TEL: (510) 319-4000

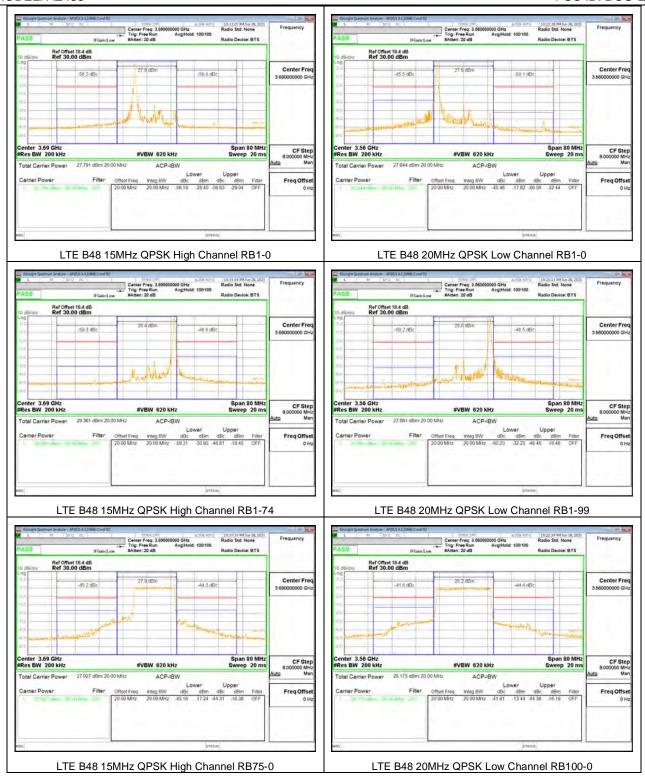

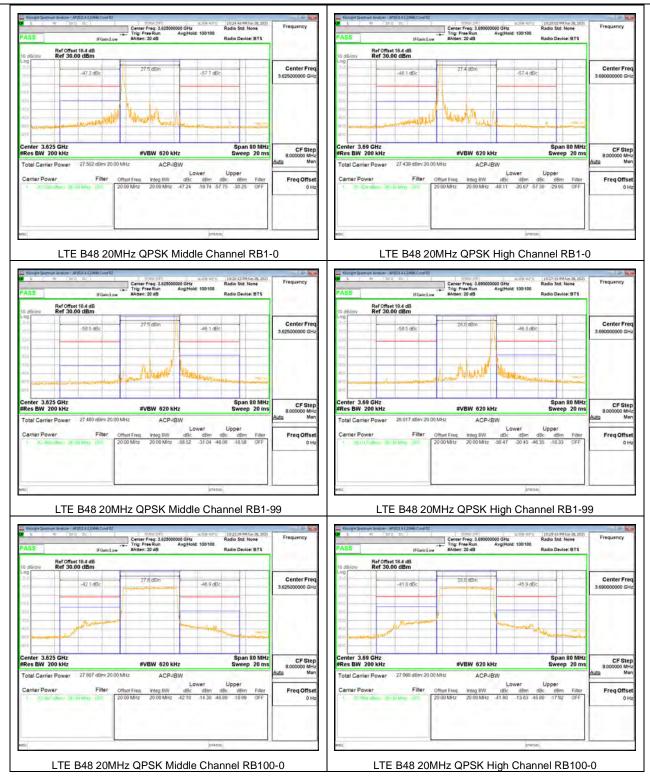

REPORT NO: 13571601-E8V3

EUT MODEL: A2483

DATE: AUGUST 04, 2021

FCC ID: BCG-E4000A

9.2.13. LTE BAND 66 AND 5G NR n66 BANDEDGE

LIMITS


FCC: §27.53(h)


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

LTE BAND 66 BANDEDGE





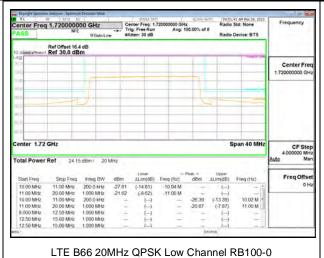

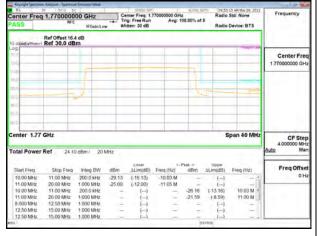


DATE: AUGUST 04, 2021 FCC ID: BCG-E4000A


REPORT NO: 13571601-E8V3 EUT MODEL: A2483

5G NR n66 BANDEDGE



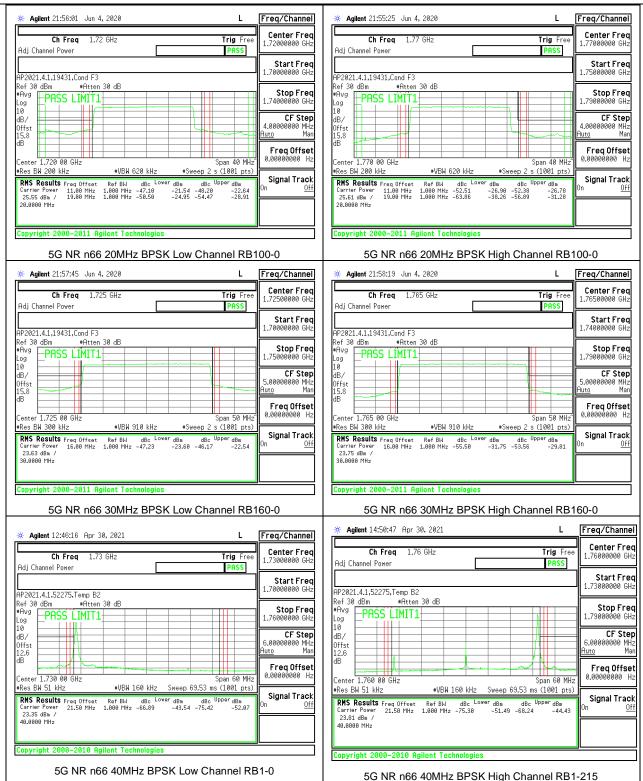

DATE: AUGUST 04, 2021 FCC ID: BCG-E4000A

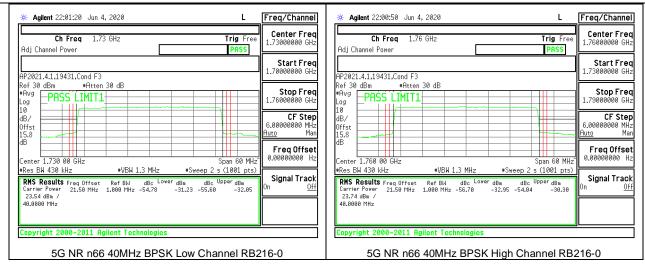

REPORT NO: 13571601-E8V3

EUT MODEL: A2483

DATE: AUGUST 04, 2021

FCC ID: BCG-E4000A

9.2.14. LTE BAND 71 AND 5G NR n71 EMISSION MASK

LIMITS

FCC: §27.53

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least 43 + 10 log (P) dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

LTE BAND 71 EMISSION MASK

