


BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

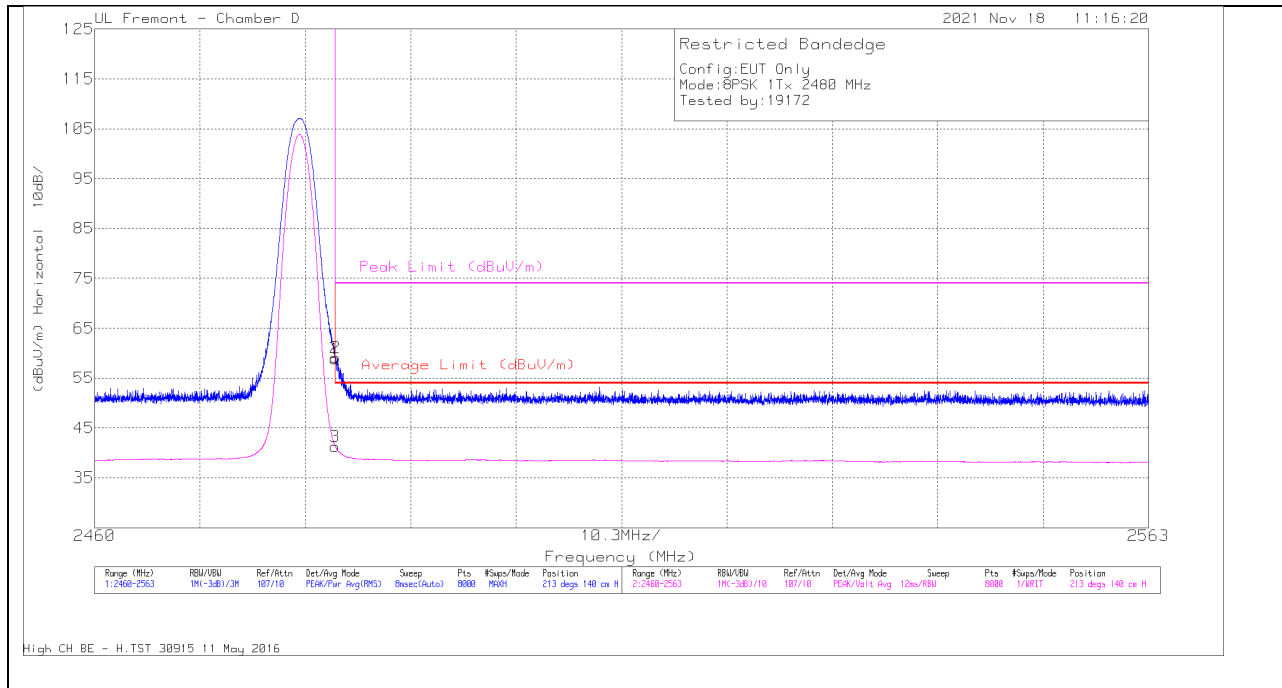

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T712 (dB/m) | Amp/Cb I/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|-------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2483.5 | 46.79 | Pk | 32.7 | -20.7 | 58.79 | - | - | 74 | -15.21 | 213 | 140 | H |
| 2 | * 2483.53 | 47.13 | Pk | 32.7 | -20.7 | 59.13 | - | - | 74 | -14.87 | 213 | 140 | H |
| 3 | * 2483.5 | 29.31 | VA1T | 32.7 | -20.7 | 41.31 | 54 | -12.69 | - | - | 213 | 140 | H |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL RESULT

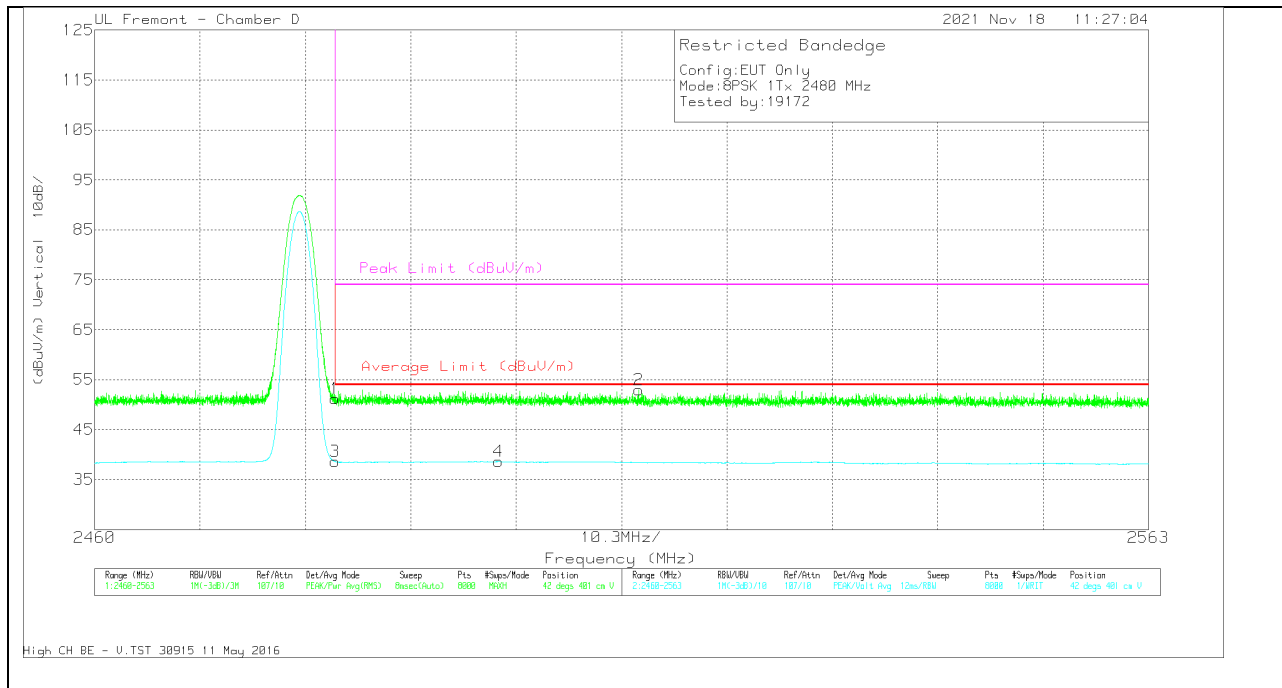


| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T712 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2483.5 | 39.24 | Pk | 32.7 | -20.7 | 51.24 | - | - | 74 | -22.76 | 42 | 401 | V |
| 3 | * 2483.5 | 26.59 | VA1T | 32.7 | -20.7 | 38.59 | 54 | -15.41 | - | - | 42 | 401 | V |
| 4 | * 2499.45 | 26.52 | VA1T | 32.8 | -20.7 | 38.62 | 54 | -15.38 | - | - | 42 | 401 | V |
| 2 | 2513.182 | 40.98 | Pk | 32.7 | -20.7 | 52.98 | - | - | 74 | -21.02 | 42 | 401 | V |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 VA1T - FHSS: Linear Voltage Average $V_B=1/T_{on}$ where: T_{on} is transmit duration

ANT 3

BANDEGE (LOW CHANNEL)

HORIZONTAL RESULT

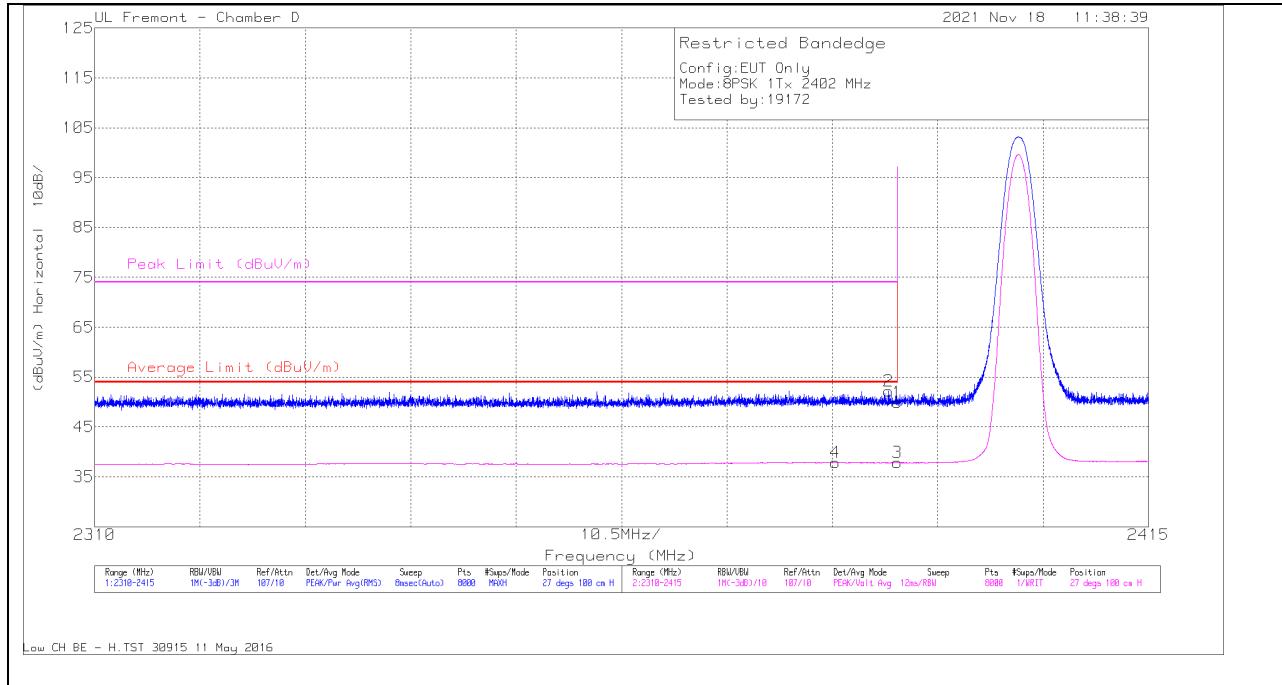


| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T712 (dB/m) | Amp/Cb I/Ftr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2390 | 38.59 | Pk | 32.1 | -20.7 | 49.99 | - | - | 74 | -24.01 | 27 | 100 | H |
| 2 | * 2389.11 | 40.84 | Pk | 32.1 | -20.7 | 52.24 | - | - | 74 | -21.76 | 27 | 100 | H |
| 3 | * 2390 | 26.46 | VA1T | 32.1 | -20.7 | 37.86 | 54 | -16.14 | - | - | 27 | 100 | H |
| 4 | * 2383.77 | 26.59 | VA1T | 32.1 | -20.8 | 37.89 | 54 | -16.11 | - | - | 27 | 100 | H |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL RESULT

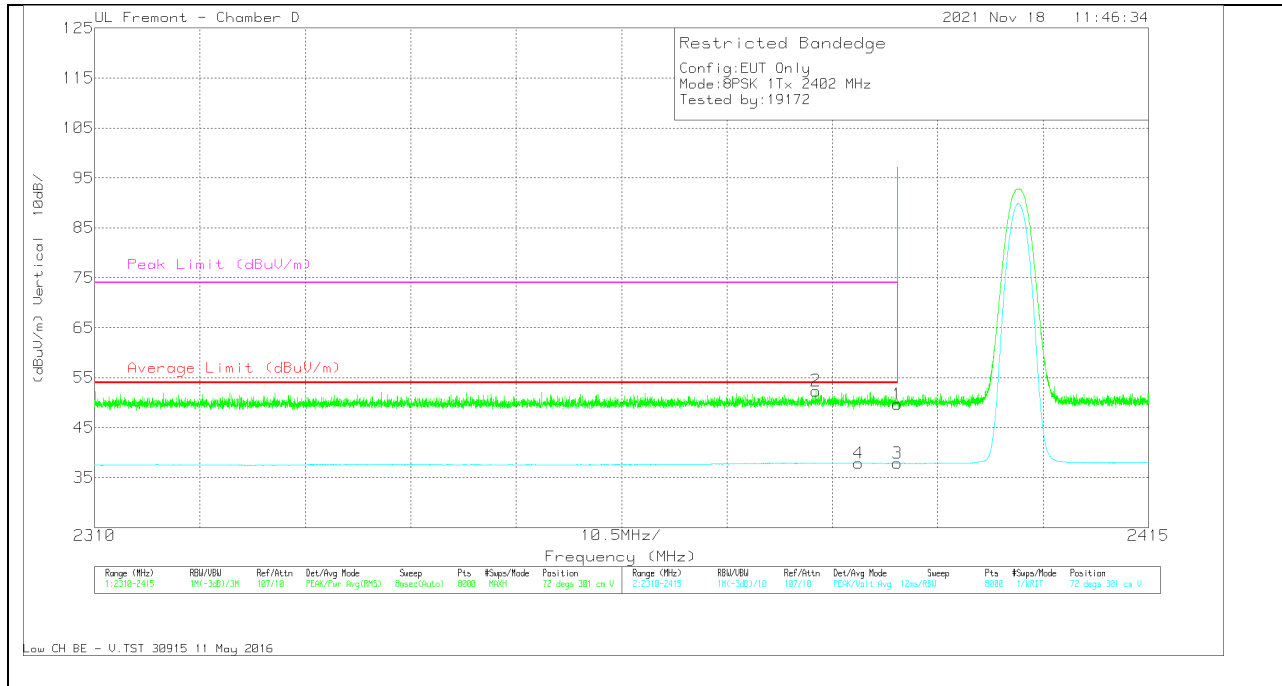


| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T712 (dB/m) | Amp/Cb I/Filtr/PA d (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|--------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2390 | 38.32 | Pk | 32.1 | -20.7 | 49.72 | - | - | 74 | -24.28 | 72 | 301 | V |
| 2 | * 2381.84 | 41.08 | Pk | 32.1 | -20.8 | 52.38 | - | - | 74 | -21.62 | 72 | 301 | V |
| 3 | * 2390 | 26.42 | VA1T | 32.1 | -20.7 | 37.82 | 54 | -16.18 | - | - | 72 | 301 | V |
| 4 | * 2386.13 | 26.6 | VA1T | 32.1 | -20.8 | 37.9 | 54 | -16.1 | - | - | 72 | 301 | V |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

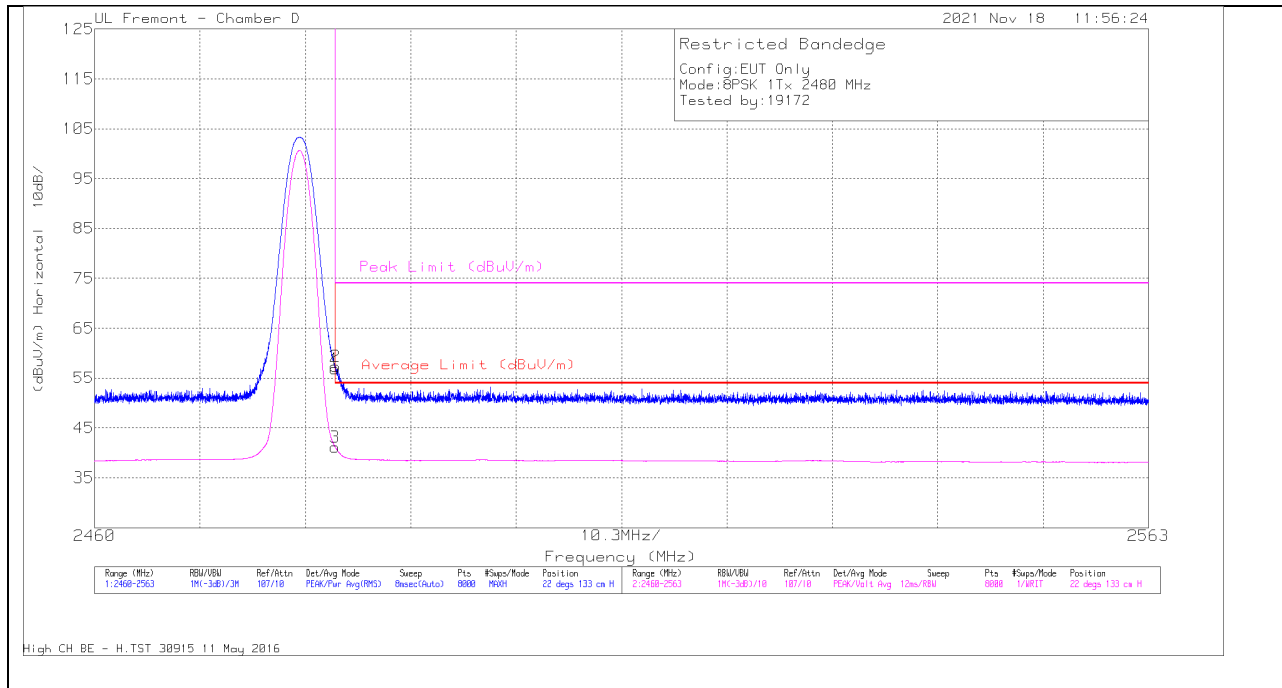


| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T712 (dB/m) | Amp/Cb I/Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2483.5 | 44.86 | Pk | 32.7 | -20.7 | 56.86 | - | - | 74 | -17.14 | 22 | 133 | H |
| 2 | * 2483.52 | 45.37 | Pk | 32.7 | -20.7 | 57.37 | - | - | 74 | -16.63 | 22 | 133 | H |
| 3 | * 2483.5 | 29.14 | VA1T | 32.7 | -20.7 | 41.14 | 54 | -12.86 | - | - | 22 | 133 | H |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL RESULT

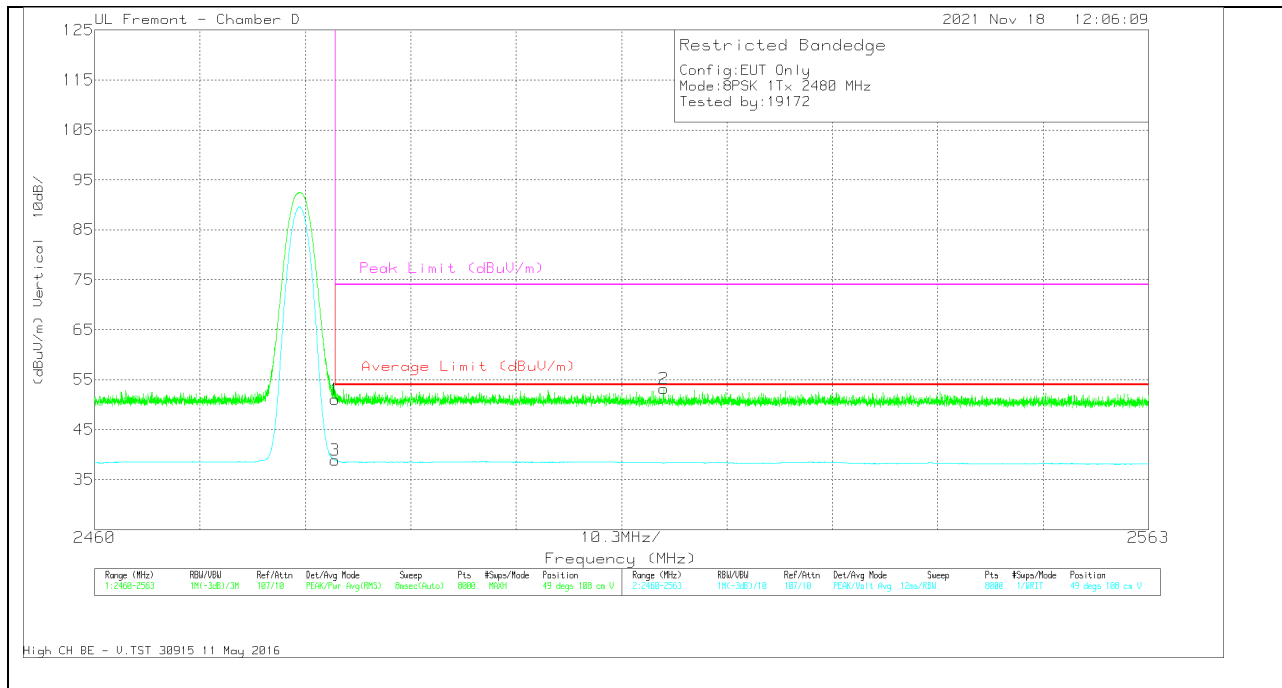

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T712 (dB/m) | Amp/Cb l/Fitr/Pa d (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|-------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2483.5 | 39.05 | Pk | 32.7 | -20.7 | 51.05 | - | - | 74 | -22.95 | 49 | 108 | V |
| 3 | * 2483.5 | 26.89 | VA1T | 32.7 | -20.7 | 38.89 | 54 | -15.11 | - | - | 49 | 108 | V |
| 2 | 2515.60 | 41.21 | Pk | 32.7 | -20.7 | 53.21 | - | - | 74 | -20.79 | 49 | 108 | V |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

10.1.9. LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

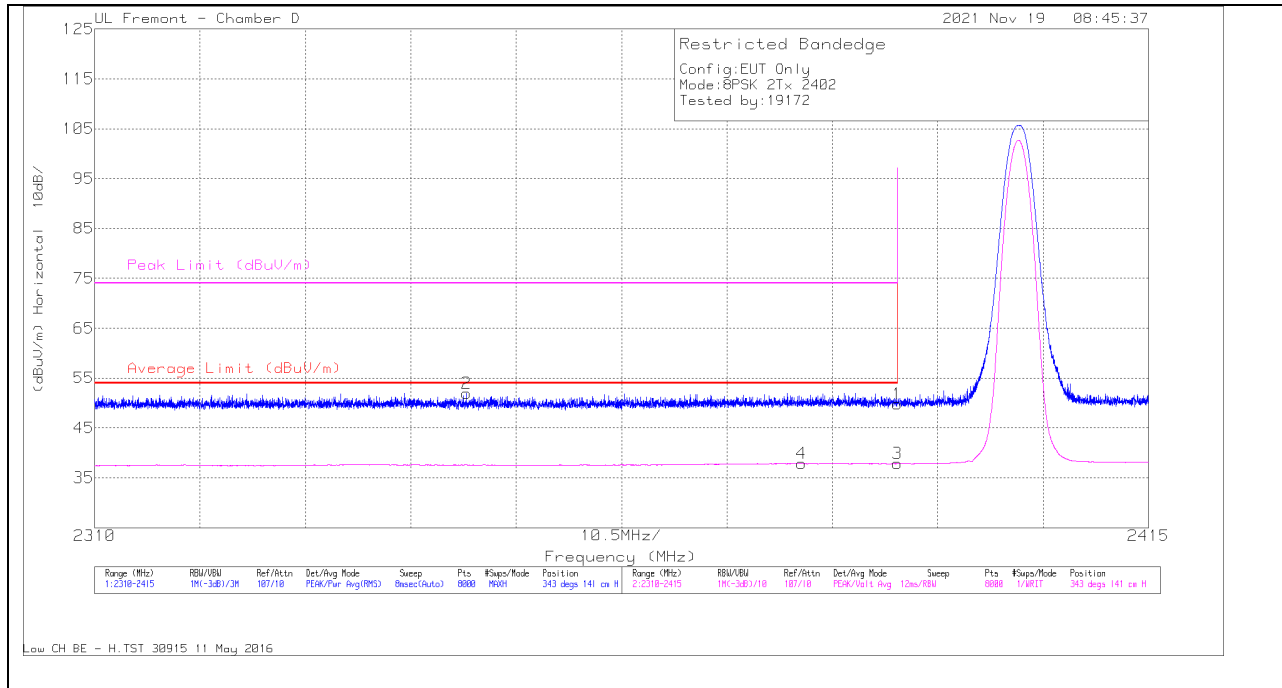


| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T712 (dB/m) | Amp/Cb I/Ftr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2390 | 38.38 | Pk | 32.1 | -20.7 | 49.78 | - | - | 74 | -24.22 | 343 | 141 | H |
| 2 | * 2347.04 | 40.89 | Pk | 31.9 | -20.8 | 51.99 | - | - | 74 | -22.01 | 343 | 141 | H |
| 3 | * 2390 | 26.42 | VA1T | 32.1 | -20.7 | 37.82 | 54 | -16.18 | - | - | 343 | 141 | H |
| 4 | * 2380.41 | 26.61 | VA1T | 32.1 | -20.8 | 37.91 | 54 | -16.09 | - | - | 343 | 141 | H |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL RESULT

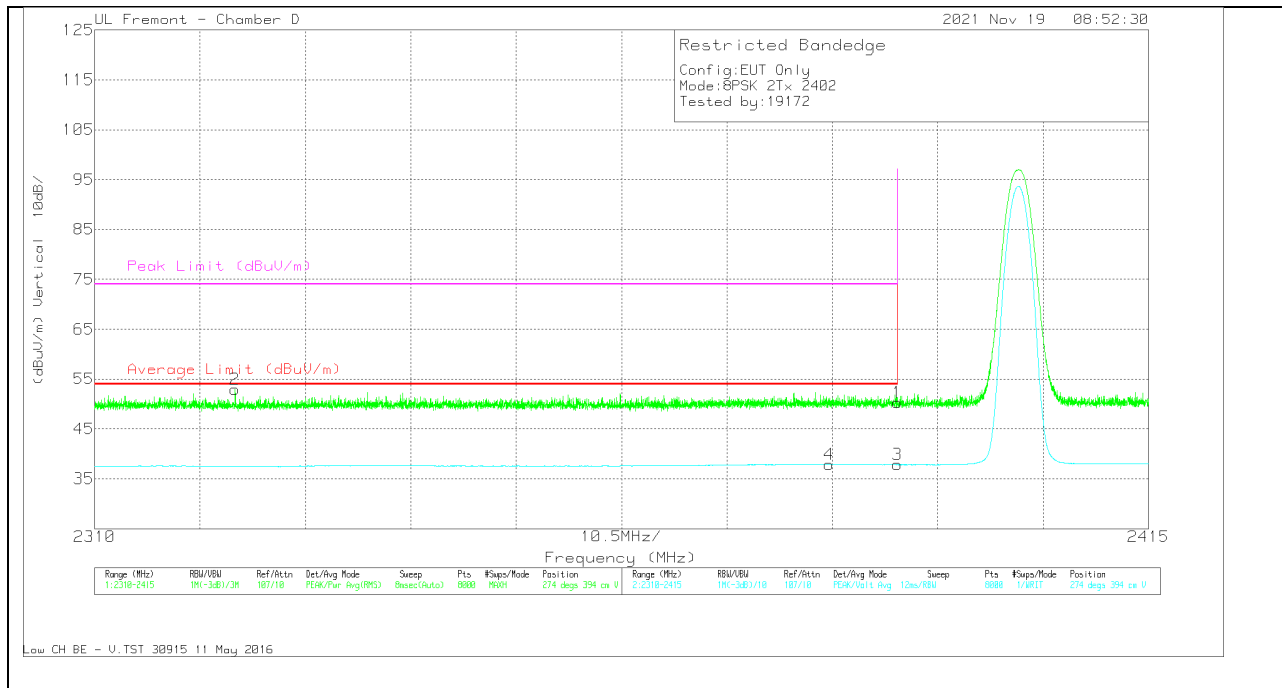

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T712 (dB/m) | Amp/Cbi/Ftr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2390 | 38.88 | Pk | 32.1 | -20.7 | 50.28 | - | - | 74 | -23.72 | 274 | 394 | V |
| 2 | * 2323.99 | 42.03 | Pk | 31.8 | -20.9 | 52.93 | - | - | 74 | -21.07 | 274 | 394 | V |
| 3 | * 2390 | 26.43 | VA1T | 32.1 | -20.7 | 37.83 | 54 | -16.17 | - | - | 274 | 394 | V |
| 4 | * 2383.19 | 26.63 | VA1T | 32.1 | -20.8 | 37.93 | 54 | -16.07 | - | - | 274 | 394 | V |


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

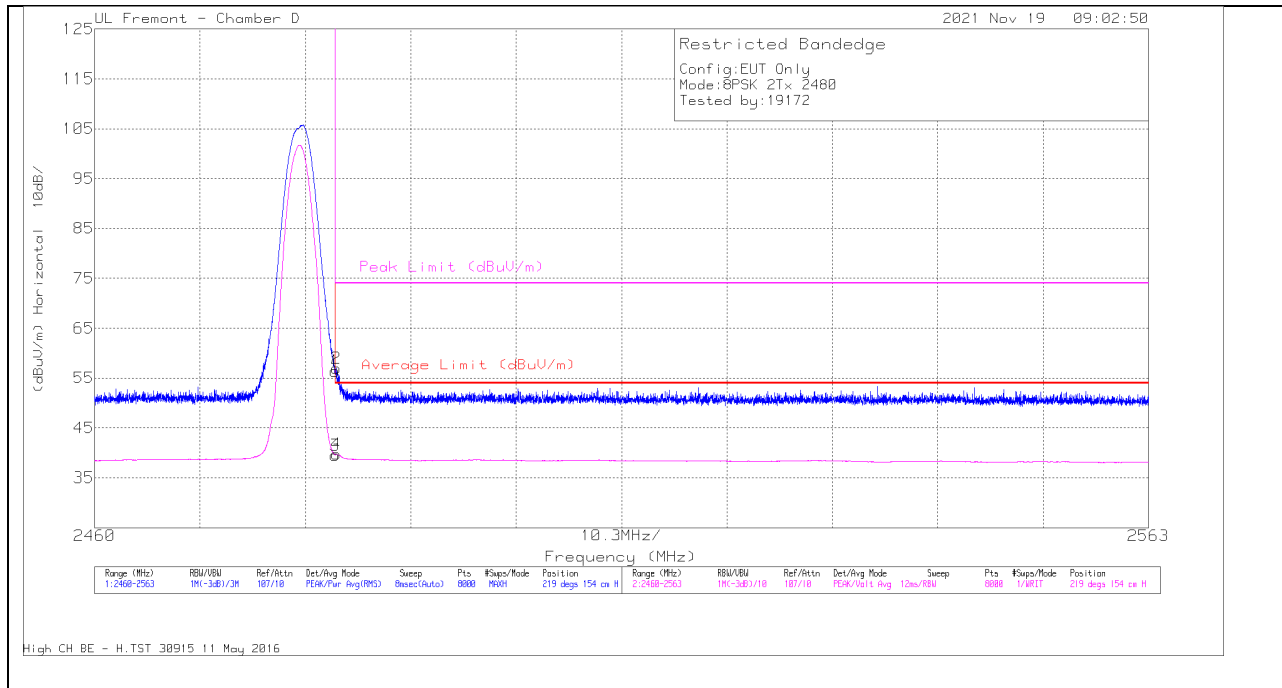

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T712 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2483.5 | 44.4 | Pk | 32.7 | -20.7 | 56.4 | - | - | 74 | -17.6 | 219 | 154 | H |
| 2 | * 2483.59 | 45.01 | Pk | 32.7 | -20.7 | 57.01 | - | - | 74 | -16.99 | 219 | 154 | H |
| 3 | * 2483.5 | 27.56 | VA1T | 32.7 | -20.7 | 39.56 | 54 | -14.44 | - | - | 219 | 154 | H |
| 4 | * 2483.62 | 27.73 | VA1T | 32.7 | -20.7 | 39.73 | 54 | -14.27 | - | - | 219 | 154 | H |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL RESULT

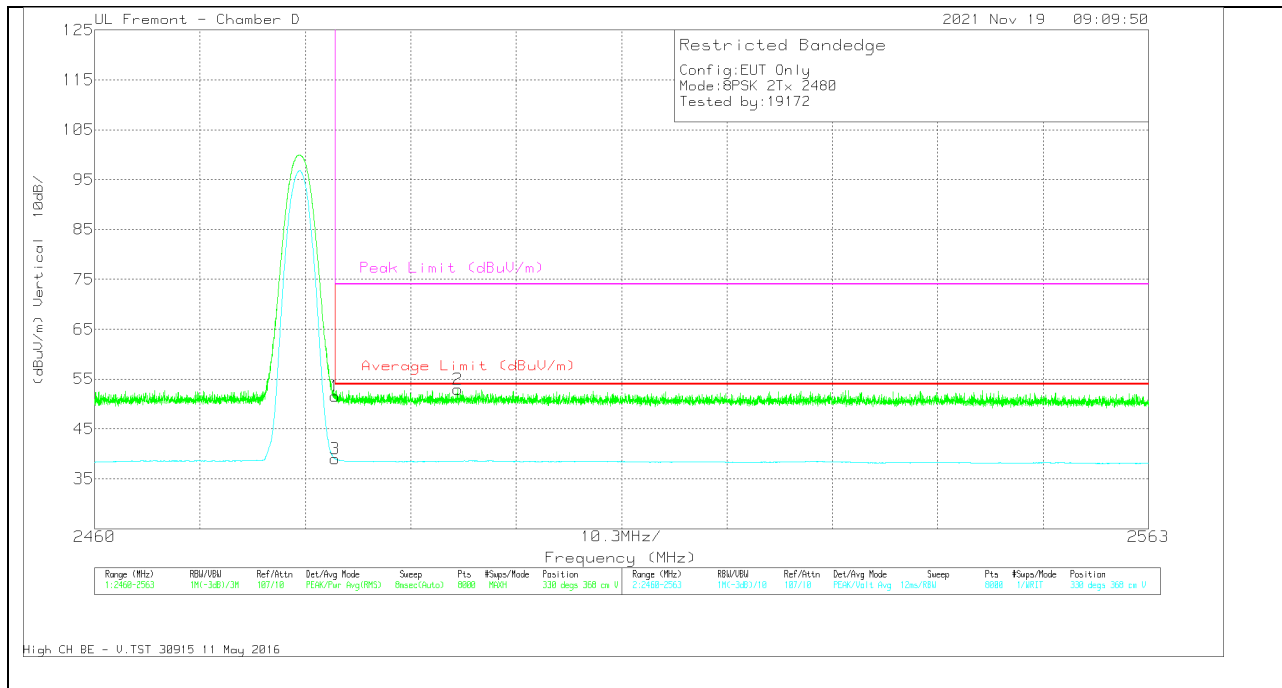


| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T712 (dB/m) | Amp/Cb I/Fitr/Par d (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|--------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2483.5 | 39.55 | Pk | 32.7 | -20.7 | 51.55 | - | - | 74 | -22.45 | 330 | 368 | V |
| 2 | * 2495.48 | 40.89 | Pk | 32.8 | -20.7 | 52.99 | - | - | 74 | -21.01 | 330 | 368 | V |
| 3 | * 2483.5 | 26.98 | VA1T | 32.7 | -20.7 | 38.98 | 54 | -15.02 | - | - | 330 | 368 | V |


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 VA1T - FHSS: Linear Voltage Average $V_B=1/Ton$ where: Ton is transmit duration

10.2. WORST CASE BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

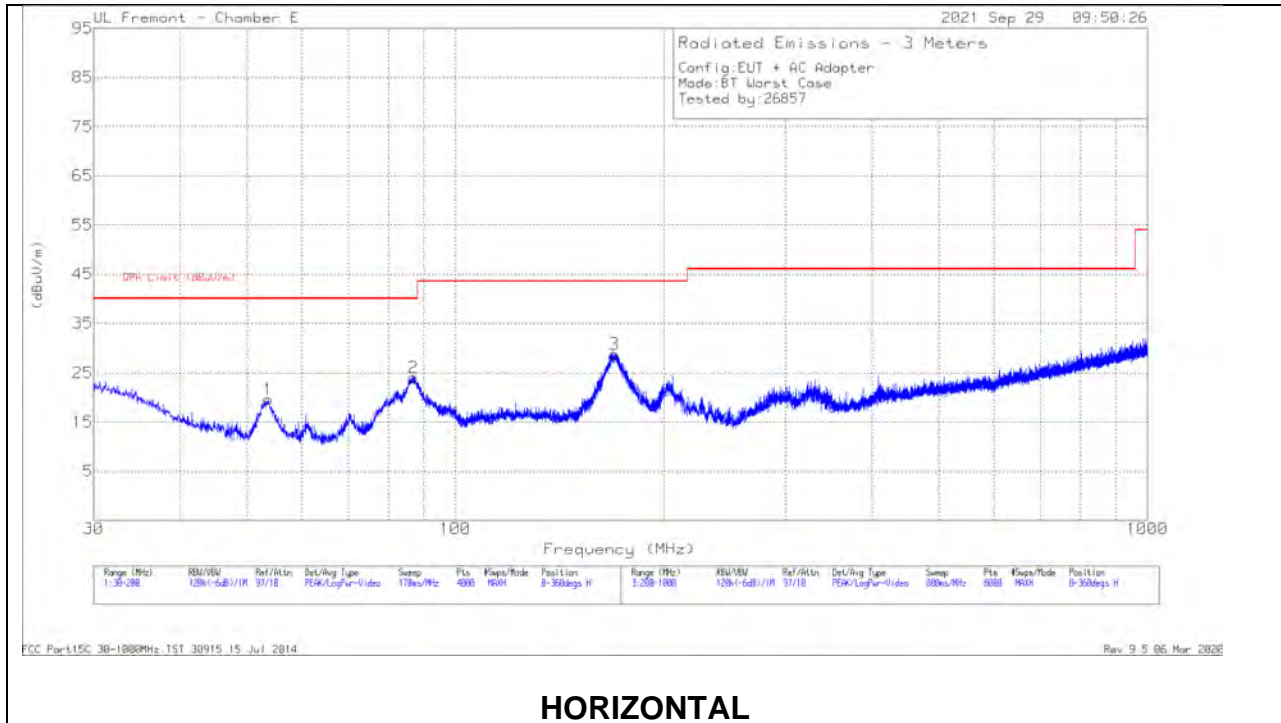

HORIZONTAL

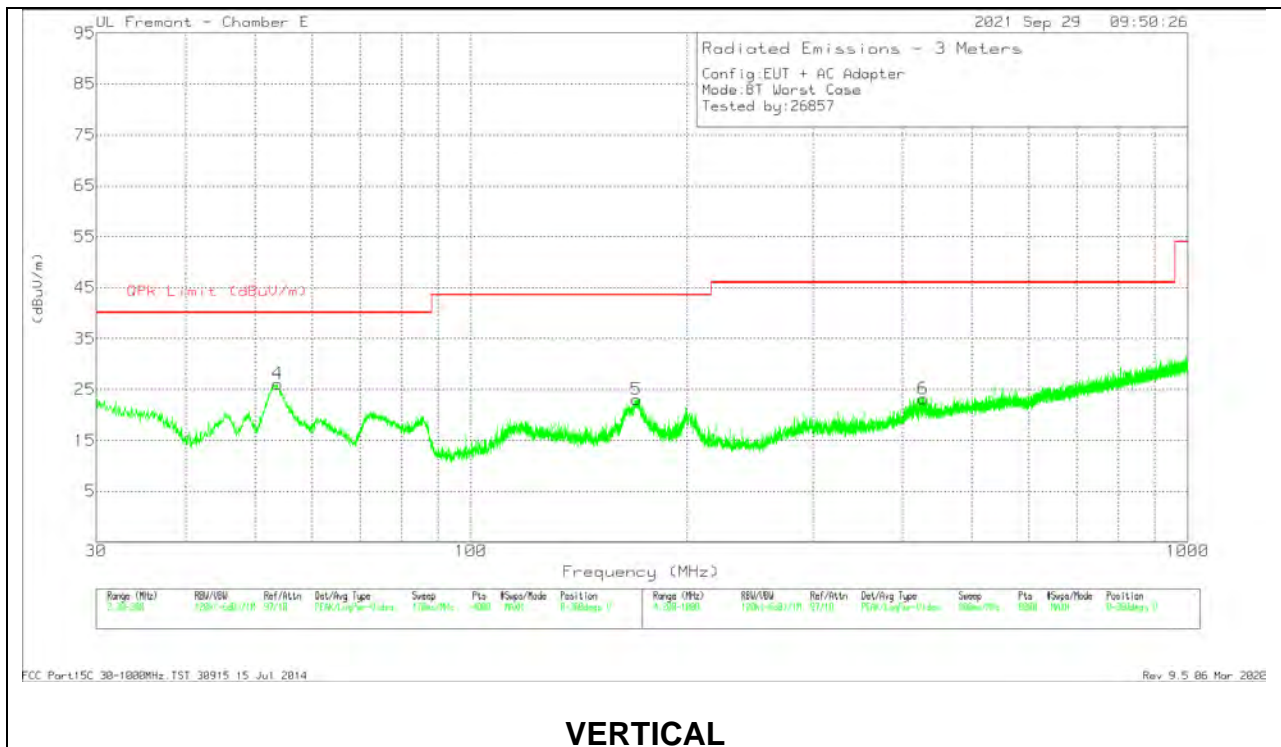

VERTICAL

Below 1GHz Data


| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF 204045 (dB/m) | Amp/Cbl (dB) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------|--------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 3 | * 169.6486 | 41.34 | Pk | 17.5 | -30.1 | 28.74 | 43.52 | -14.78 | 0-360 | 201 | H |
| 5 | * 170.2438 | 35.68 | Pk | 17.5 | -30.1 | 23.08 | 43.52 | -20.44 | 0-360 | 100 | V |
| 1 | 53.6361 | 37.71 | Pk | 13.1 | -31.2 | 19.61 | 40 | -20.39 | 0-360 | 401 | H |
| 4 | 53.7211 | 44.16 | Pk | 13.1 | -31.2 | 26.06 | 40 | -13.94 | 0-360 | 100 | V |
| 2 | 87.0498 | 41.7 | Pk | 13.3 | -30.9 | 24.1 | 40 | -15.9 | 0-360 | 201 | H |
| 6 | 427.6296 | 29.6 | Pk | 22.2 | -28.6 | 23.2 | 46.02 | -22.82 | 0-360 | 99 | V |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

10.3. WORST CASE 18-26 GHZ

SPURIOUS EMISSIONS 18-26 GHZ (WORST-CASE CONFIGURATION)

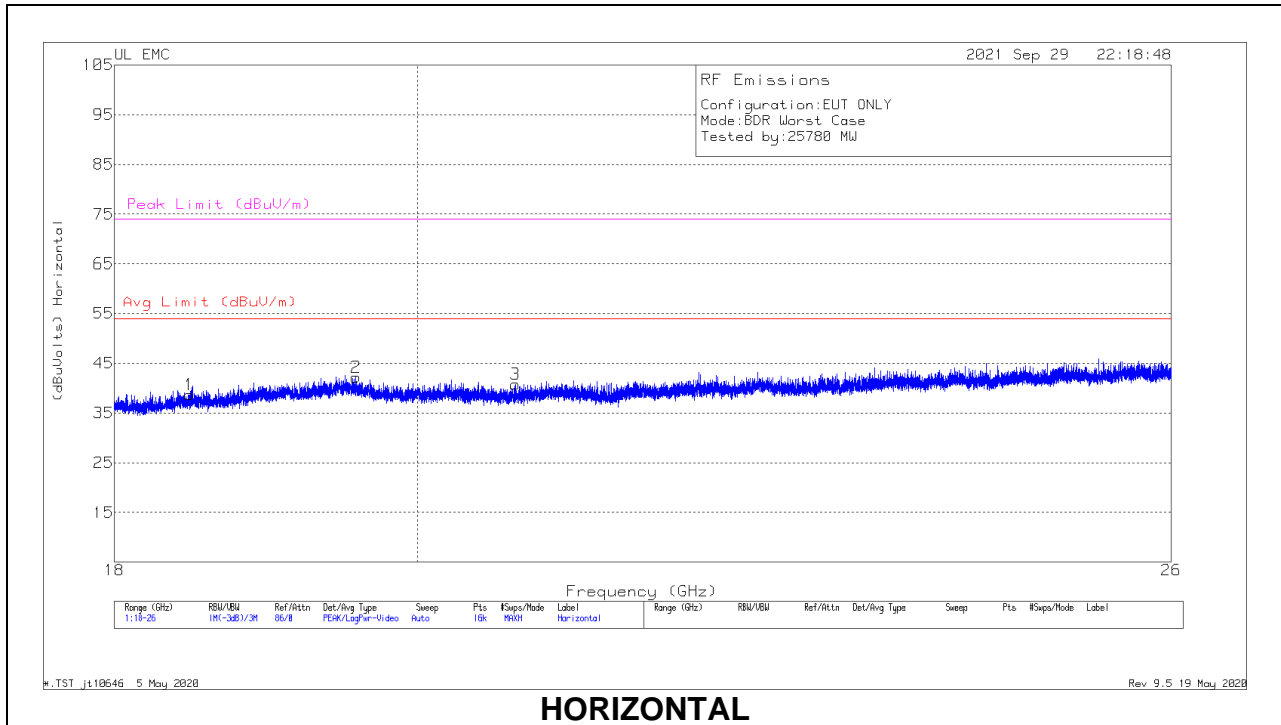

HORIZONTAL

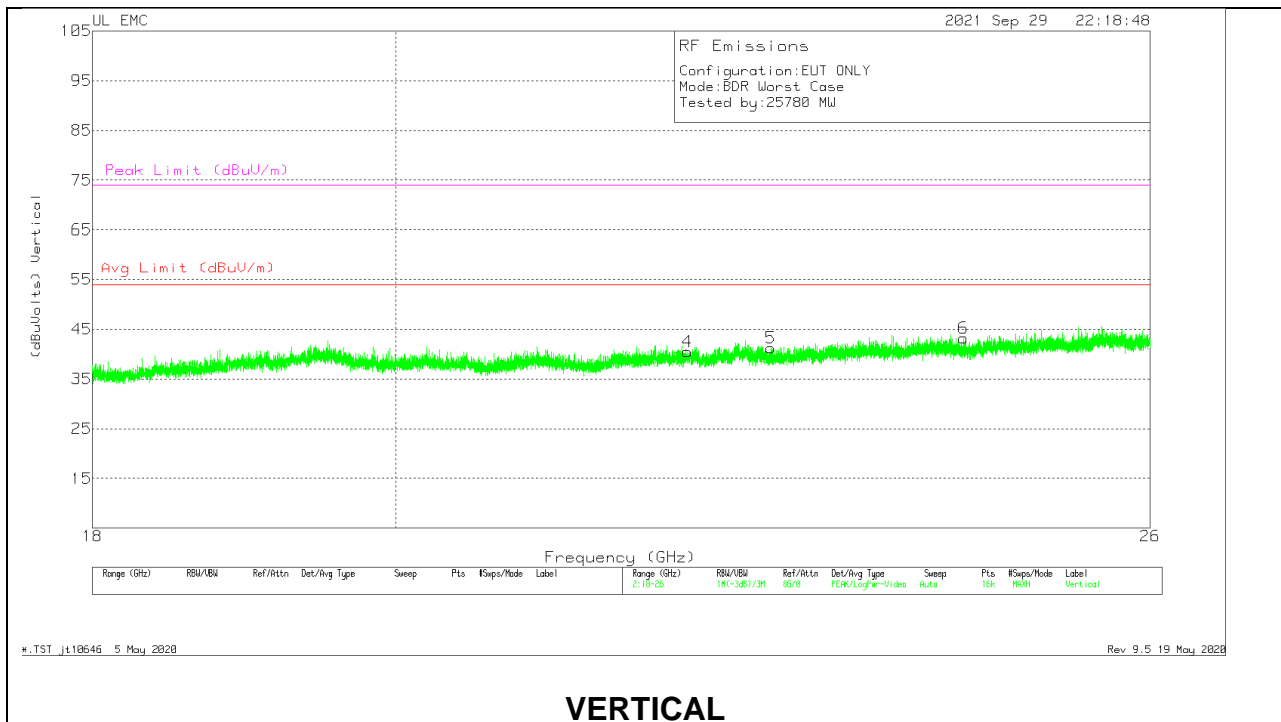

VERTICAL

18 – 26GHz DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF 81140 | Amp/Cbl (dB) | Dist Corr (dB) | Corrected Reading (dBuVolts) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) |
|--------|-----------------|----------------------|-----|----------|--------------|----------------|------------------------------|--------------------|-------------|---------------------|----------------|
| 1 | 18.47497 | 36.13 | Pk | 32.4 | -20.4 | -9.5 | 38.63 | 54 | -15.37 | 74 | -35.37 |
| 2 | 19.5769 | 37.51 | Pk | 32.8 | -18.6 | -9.5 | 42.21 | 54 | -11.79 | 74 | -31.79 |
| 3 | 20.69483 | 37.29 | Pk | 32.9 | -19.9 | -9.5 | 40.79 | 54 | -13.21 | 74 | -33.21 |
| 4 | 22.13624 | 35.38 | Pk | 33.3 | -18.7 | -9.5 | 40.48 | 54 | -13.52 | 74 | -33.52 |
| 5 | 22.7857 | 36.61 | Pk | 33.4 | -19.3 | -9.5 | 41.21 | 54 | -12.79 | 74 | -32.79 |
| 6 | 24.36511 | 37.22 | Pk | 33.7 | -18.2 | -9.5 | 43.22 | 54 | -10.78 | 74 | -30.78 |

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|------------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 * | 56 to 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1. AC Power Line With AC/DC Adapter

LINE 1 RESULTS

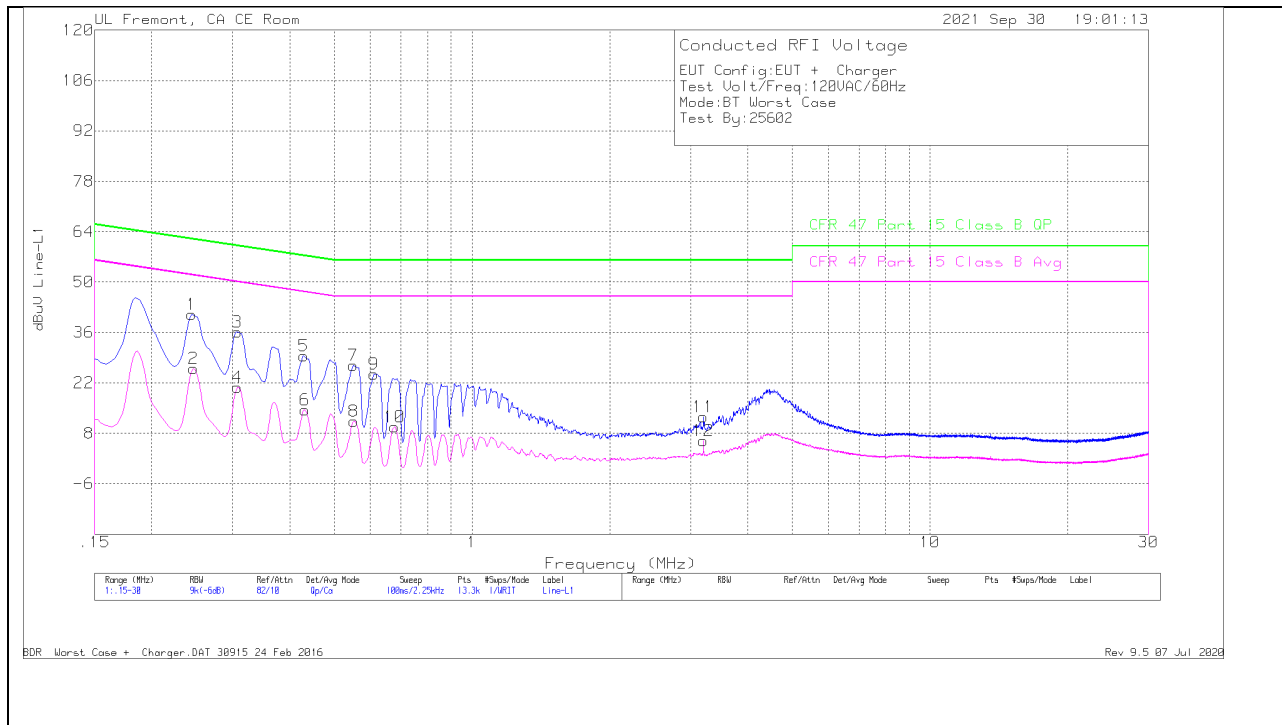


Range 1: Line-L1 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | PRE018644 6 L1 | LC Cables C1&C3 dB | TekBox Limiter TBFL1 Model 207 | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Av(CISPR)M argin (dB) |
|--------|-----------------|----------------------|-----|----------------|--------------------|--------------------------------|------------------------|---------------------------|----------------|----------------------------|-----------------------|
| 2 | .24675 | 16.68 | Ca | 0 | 0 | 9.3 | 25.98 | - | - | 51.87 | -25.89 |
| 4 | .3075 | 11.52 | Ca | 0 | 0 | 9.3 | 20.82 | - | - | 50.04 | -29.22 |
| 6 | .43125 | 5.18 | Ca | 0 | 0 | 9.3 | 14.48 | - | - | 47.23 | -32.75 |
| 8 | .55275 | 2.09 | Ca | 0 | 0 | 9.3 | 11.39 | - | - | 46 | -34.61 |
| 10 | .6765 | .5 | Ca | 0 | 0 | 9.3 | 9.8 | - | - | 46 | -36.2 |
| 12 | 3.19875 | -3.49 | Ca | 0 | .1 | 9.3 | 5.91 | - | - | 46 | -40.09 |
| 1 | .2445 | 31.65 | Qp | 0 | 0 | 9.3 | 40.95 | 61.94 | -20.99 | - | - |
| 3 | .3075 | 26.88 | Qp | 0 | 0 | 9.3 | 36.18 | 60.04 | -23.86 | - | - |
| 5 | .429 | 20.17 | Qp | 0 | 0 | 9.3 | 29.47 | 57.27 | -27.8 | - | - |
| 7 | .5505 | 17.6 | Qp | 0 | 0 | 9.3 | 26.9 | 56 | -29.1 | - | - |
| 9 | .61125 | 15.12 | Qp | 0 | 0 | 9.3 | 24.42 | 56 | -31.58 | - | - |
| 11 | 3.19875 | 3.24 | Qp | 0 | .1 | 9.3 | 12.64 | 56 | -43.36 | - | - |

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

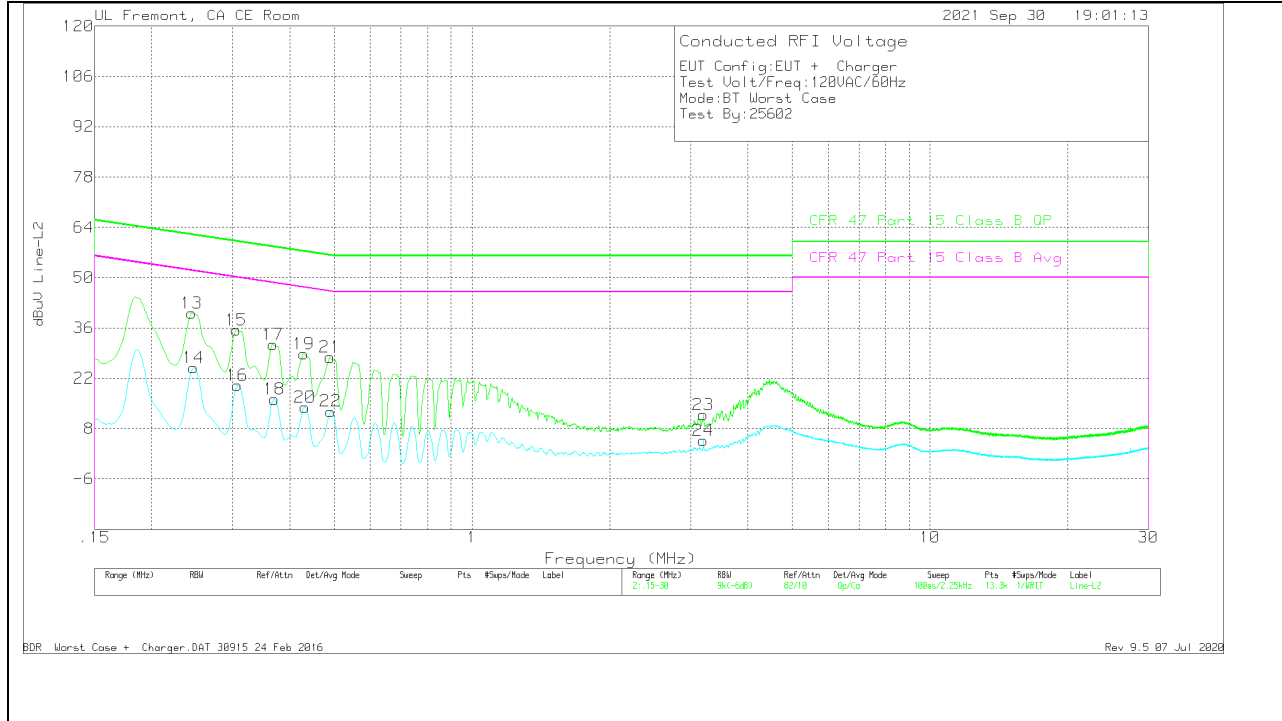


Range 2: Line-L2 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | PRE018644 6 L2 | LC Cables C2&C3 dB | TekBox Limiter TBFL1 Model 207 | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Av(CISPR)M argin (dB) |
|--------|-----------------|----------------------|-----|----------------|--------------------|--------------------------------|------------------------|---------------------------|----------------|----------------------------|-----------------------|
| 14 | .24675 | 15.71 | Ca | 0 | 0 | 9.3 | 25.01 | - | - | 51.87 | -26.86 |
| 16 | .3075 | 10.75 | Ca | 0 | 0 | 9.3 | 20.05 | - | - | 50.04 | -29.99 |
| 18 | .3705 | 6.85 | Ca | 0 | 0 | 9.3 | 16.15 | - | - | 48.49 | -32.34 |
| 20 | .43125 | 4.69 | Ca | 0 | 0 | 9.3 | 13.99 | - | - | 47.23 | -33.24 |
| 22 | .492 | 3.53 | Ca | 0 | 0 | 9.3 | 12.83 | - | - | 46.13 | -33.3 |
| 24 | 3.19875 | -4.67 | Ca | 0 | .1 | 9.3 | 4.73 | - | - | 46 | -41.27 |
| 13 | .2445 | 30.82 | Qp | 0 | 0 | 9.3 | 40.12 | 61.94 | -21.82 | - | - |
| 15 | .30525 | 26.13 | Qp | 0 | 0 | 9.3 | 35.43 | 60.1 | -24.67 | - | - |
| 17 | .36825 | 22.08 | Qp | 0 | 0 | 9.3 | 31.38 | 58.54 | -27.16 | - | - |
| 19 | .429 | 19.5 | Qp | 0 | 0 | 9.3 | 28.8 | 57.27 | -28.47 | - | - |
| 21 | .48975 | 18.54 | Qp | 0 | 0 | 9.3 | 27.84 | 56.17 | -28.33 | - | - |
| 23 | 3.19875 | 2.41 | Qp | 0 | .1 | 9.3 | 11.81 | 56 | -44.19 | - | - |

Qp - Quasi-Peak detector
 Ca - CISPR average detection

11.2. AC Power Line With Laptop

LINE 1 RESULTS

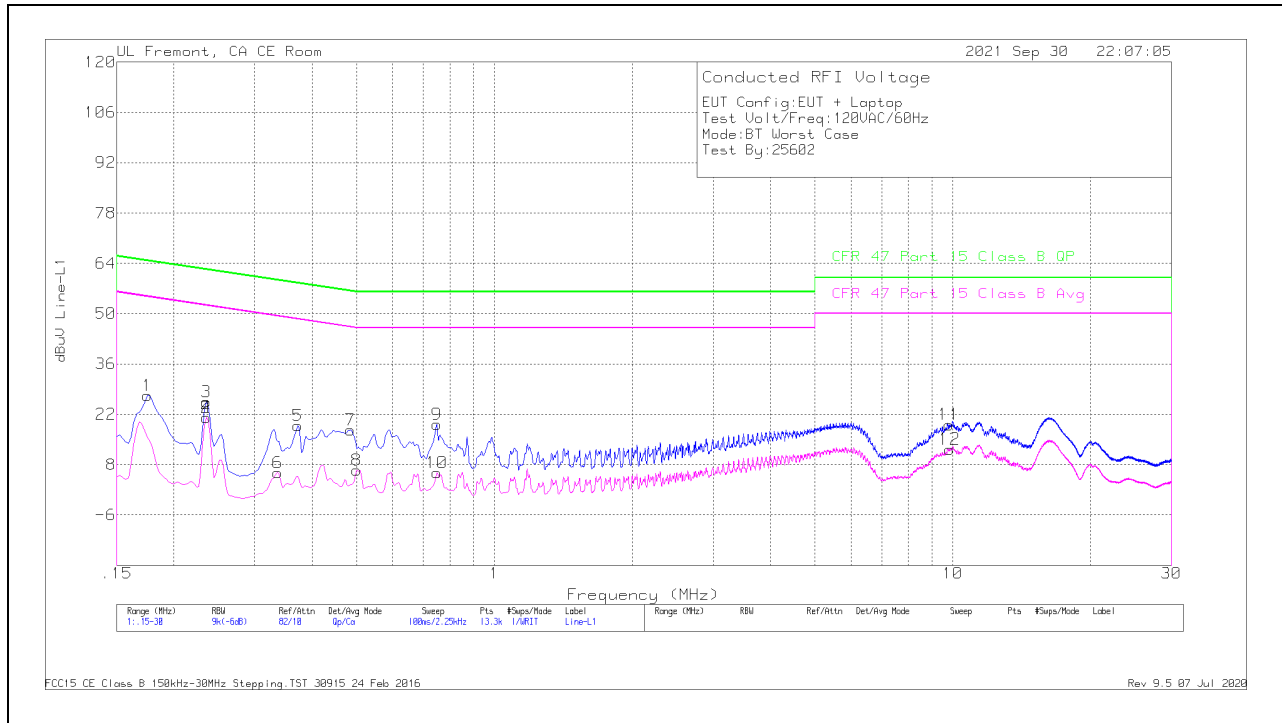


Range 1: Line-L1 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | PRE018644 6 L1 | LC Cables C1&C3 dB | TekBox Limiter TBFL1 Model 207 | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Av(CISPR)M argin (dB) |
|--------|-----------------|----------------------|-----|----------------|--------------------|--------------------------------|------------------------|---------------------------|----------------|----------------------------|-----------------------|
| 2 | .2355 | 11.77 | Ca | 0 | 0 | 9.3 | 21.07 | - | - | 52.25 | -31.18 |
| 4 | .2355 | 11.77 | Ca | 0 | 0 | 9.3 | 21.07 | - | - | 52.25 | -31.18 |
| 6 | .33675 | -3.46 | Ca | 0 | 0 | 9.3 | 5.84 | - | - | 49.28 | -43.44 |
| 8 | .501 | -2.9 | Ca | 0 | 0 | 9.3 | 6.4 | - | - | 46 | -39.6 |
| 10 | .7485 | -3.57 | Ca | 0 | 0 | 9.3 | 5.73 | - | - | 46 | -40.27 |
| 12 | 9.83175 | 2.8 | Ca | 0 | .2 | 9.3 | 12.3 | - | - | 50 | -37.7 |
| 1 | .17475 | 17.86 | Qp | 0 | 0 | 9.4 | 27.26 | 64.73 | -37.47 | - | - |
| 3 | .2355 | 16.11 | Qp | 0 | 0 | 9.3 | 25.41 | 62.25 | -36.84 | - | - |
| 5 | .37275 | 9.6 | Qp | 0 | 0 | 9.3 | 18.9 | 58.44 | -39.54 | - | - |
| 7 | .48525 | 8.32 | Qp | 0 | 0 | 9.3 | 17.62 | 56.25 | -38.63 | - | - |
| 9 | .7485 | 9.93 | Qp | 0 | 0 | 9.3 | 19.23 | 56 | -36.77 | - | - |
| 11 | 9.825 | 9.61 | Qp | 0 | .2 | 9.3 | 19.11 | 60 | -40.89 | - | - |

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

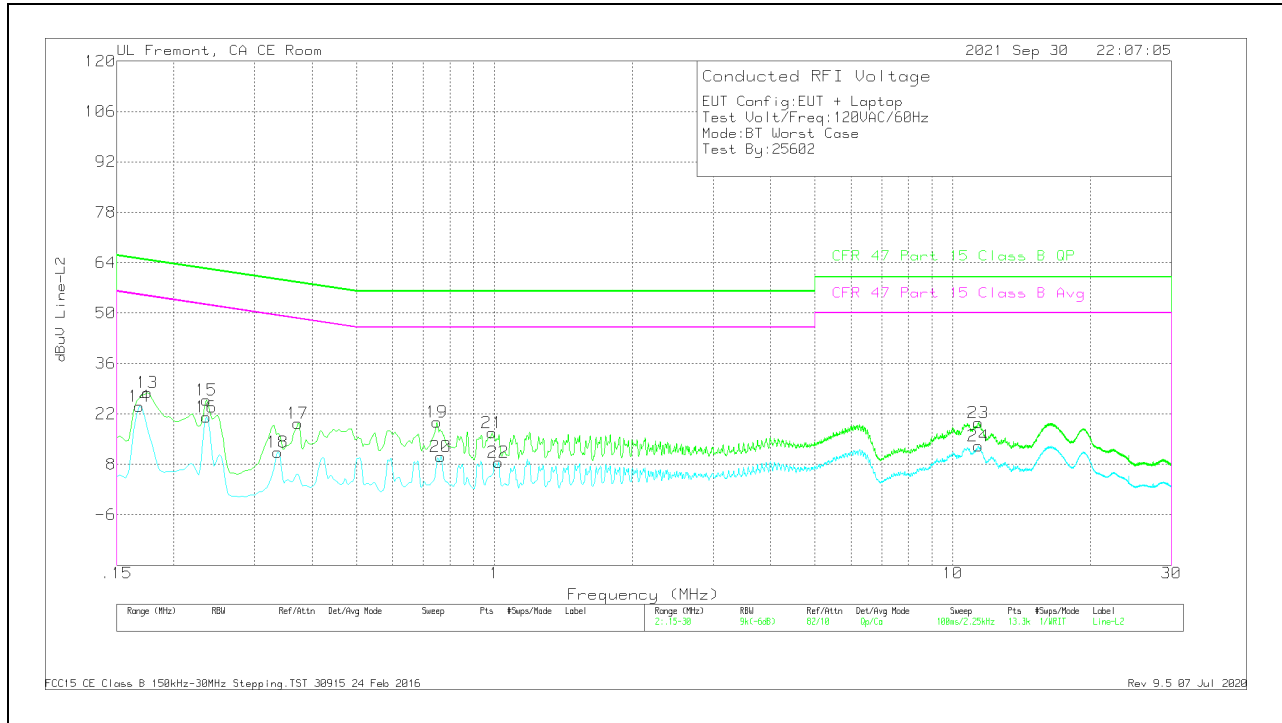

Range 2: Line-L2 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | PRE018644 6 L2 | LC Cables C2&C3 dB | TekBox Limiter TBFL1 Model 207 | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Av(CISPR)M argin (dB) |
|--------|-----------------|----------------------|-----|----------------|--------------------|--------------------------------|------------------------|---------------------------|----------------|----------------------------|-----------------------|
| 14 | .168 | 14.74 | Ca | 0 | 0 | 9.4 | 24.14 | - | - | 55.06 | -30.92 |
| 16 | .2355 | 11.86 | Ca | 0 | 0 | 9.3 | 21.16 | - | - | 52.25 | -31.09 |
| 18 | .33675 | 2.1 | Ca | 0 | 0 | 9.3 | 11.4 | - | - | 49.28 | -37.88 |
| 20 | .76425 | .83 | Ca | 0 | 0 | 9.3 | 10.13 | - | - | 46 | -35.87 |
| 22 | 1.02075 | -.78 | Ca | 0 | .1 | 9.3 | 8.62 | - | - | 46 | -37.38 |
| 24 | 11.373 | 3.53 | Ca | 0 | .2 | 9.3 | 13.03 | - | - | 50 | -36.97 |
| 13 | .17475 | 18.48 | Qp | 0 | 0 | 9.4 | 27.88 | 64.73 | -36.85 | - | - |
| 15 | .2355 | 16.54 | Qp | 0 | 0 | 9.3 | 25.84 | 62.25 | -36.41 | - | - |
| 17 | .37275 | 10.08 | Qp | 0 | 0 | 9.3 | 19.38 | 58.44 | -39.06 | - | - |
| 19 | .7485 | 10.46 | Qp | 0 | 0 | 9.3 | 19.76 | 56 | -36.24 | - | - |
| 21 | .987 | 7.37 | Qp | 0 | .1 | 9.3 | 16.77 | 56 | -39.23 | - | - |
| 23 | 11.37975 | 10.06 | Qp | 0 | .2 | 9.3 | 19.56 | 60 | -40.44 | - | - |

Qp - Quasi-Peak detector
Ca - CISPR average detection

12. SETUP PHOTOS

Please refer to 13911916-EP1V1 for setup photos

END OF TEST REPORT