


BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

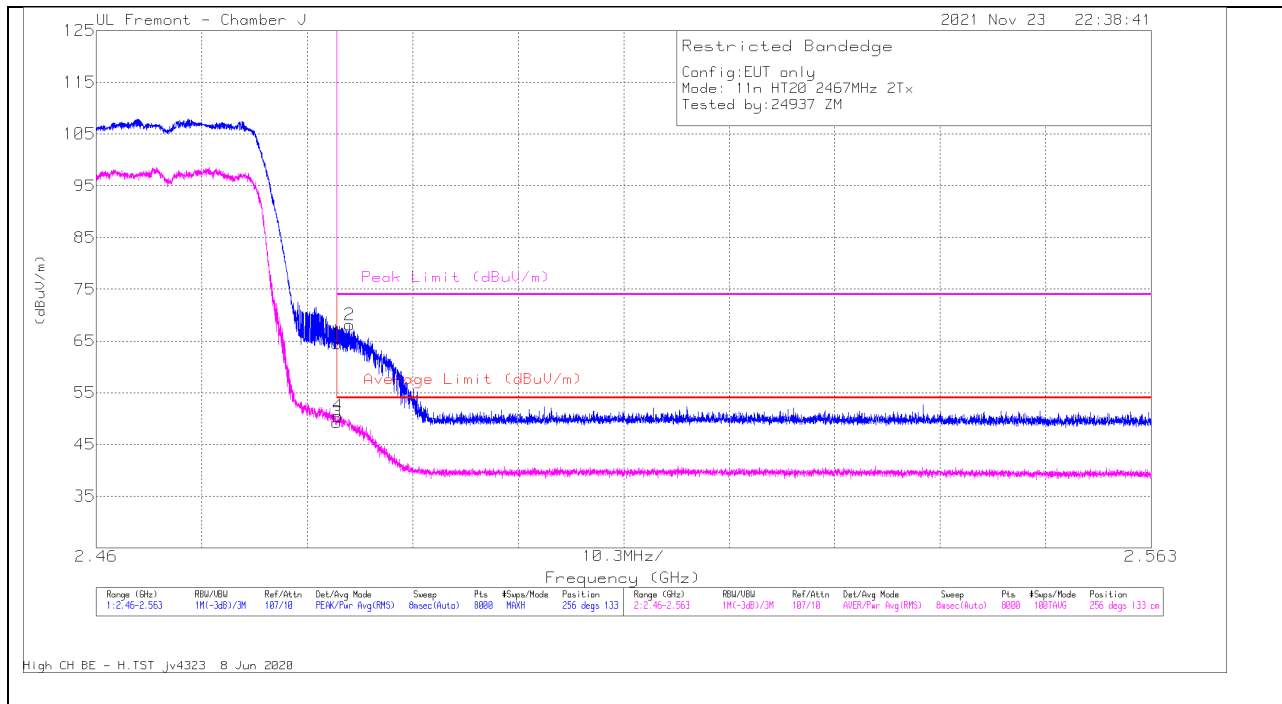


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	48.04	Pk	32.4	-16	0	64.44	-	-	74	-9.56	256	133	H
2	* 2.4847	51.71	Pk	32.4	-16	0	68.11	-	-	74	-5.89	256	133	H
3	* 2.4835	32.22	RMS	32.4	-16	.4	49.02	54	-4.98	-	-	256	133	H
4	* 2.4836	33.45	RMS	32.4	-16	.4	50.25	54	-3.75	-	-	256	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

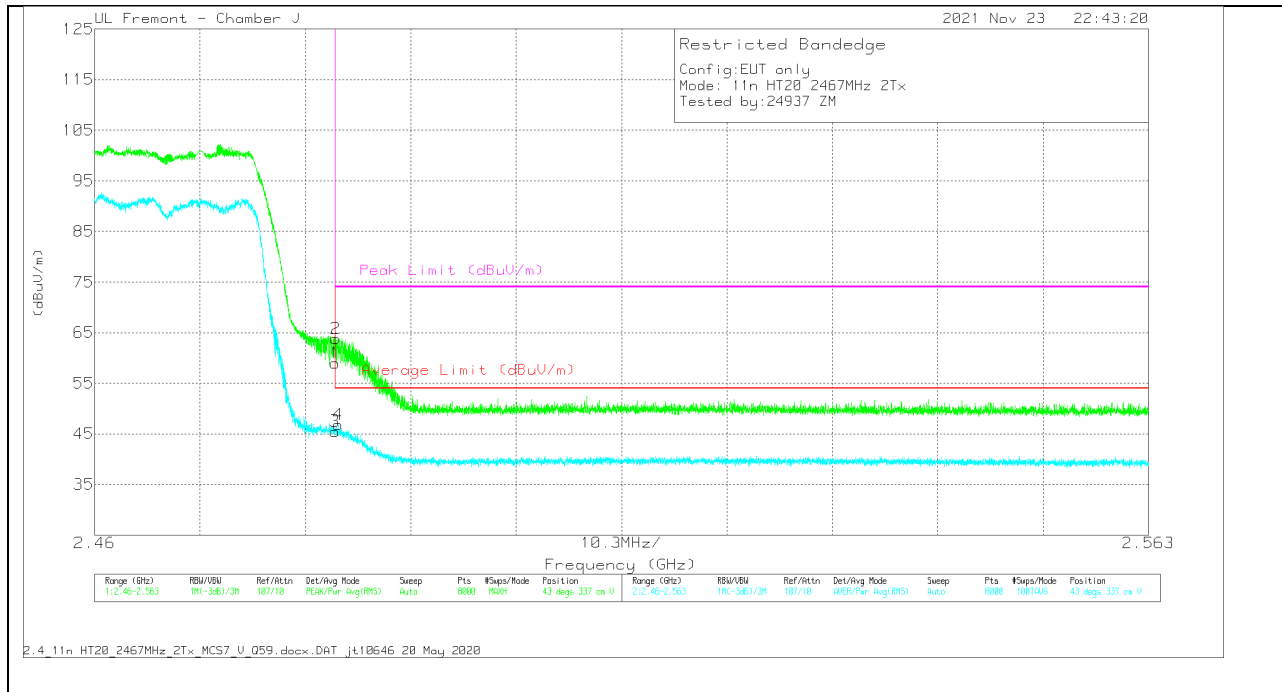

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.58	Pk	32.4	-16	0	58.98	-	-	74	-15.02	43	337	V
2	* 2.4836	47.48	Pk	32.4	-16	0	63.88	-	-	74	-10.12	43	337	V
3	* 2.4835	28.45	RMS	32.4	-16	.4	45.25	54	-8.75	-	-	43	337	V
4	* 2.4838	29.72	RMS	32.4	-16	.4	46.52	54	-7.48	-	-	43	337	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

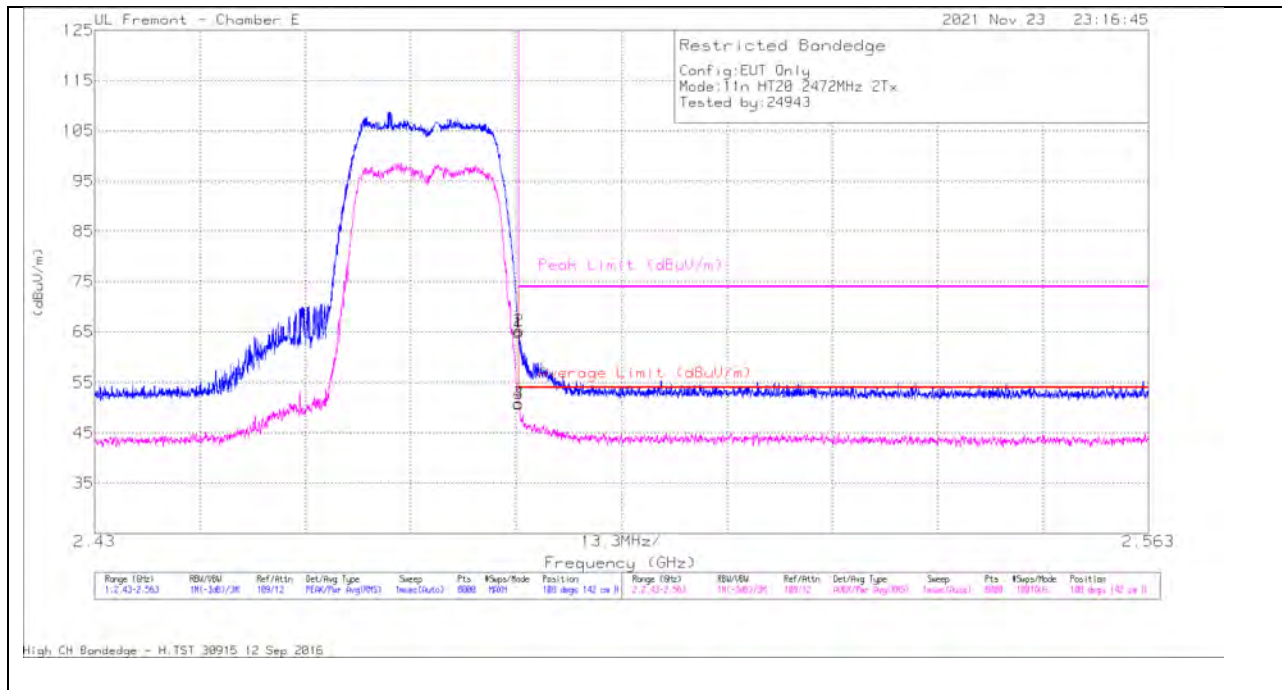


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF PRE007 8107 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	49.9	Pk	32.6	-17.7	0	64.8	-	-	74	-9.2	108	142	H
3	* 2.4835	35.3	RMS	32.6	-17.7	.4	50.6	54	-3.4	-	-	108	142	H
4	* 2.4835	35.17	RMS	32.6	-17.7	.4	50.47	54	-3.53	-	-	108	142	H
2	* 2.4836	50.32	Pk	32.6	-17.7	0	65.22	-	-	74	-8.78	108	142	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

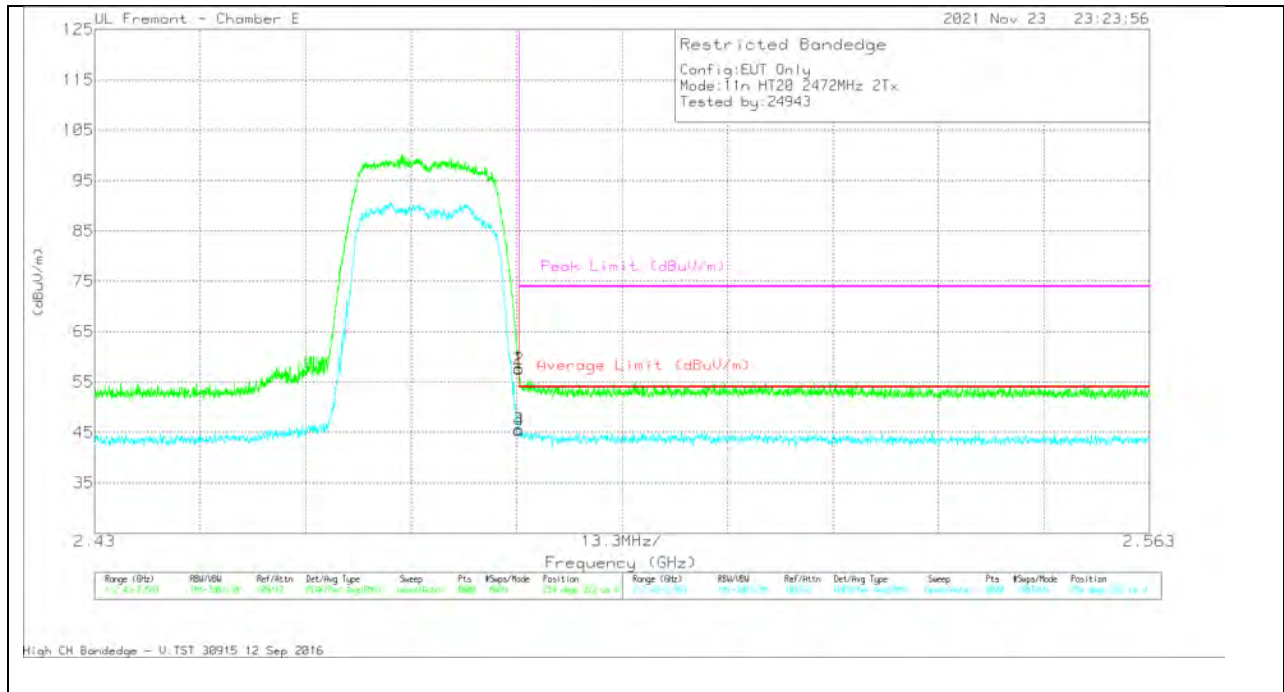


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF PRE007 8107 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	42.86	Pk	32.6	-17.7	0	57.76	-	-	74	-16.24	254	322	V
3	* 2.4835	30.05	RMS	32.6	-17.7	.4	45.35	54	-8.65	-	-	254	322	V
2	* 2.48351	42.75	Pk	32.6	-17.7	0	57.65	-	-	74	-16.35	254	322	V
4	* 2.48351	29.88	RMS	32.6	-17.7	.4	45.18	54	-8.82	-	-	254	322	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.1.5. 802.11n HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

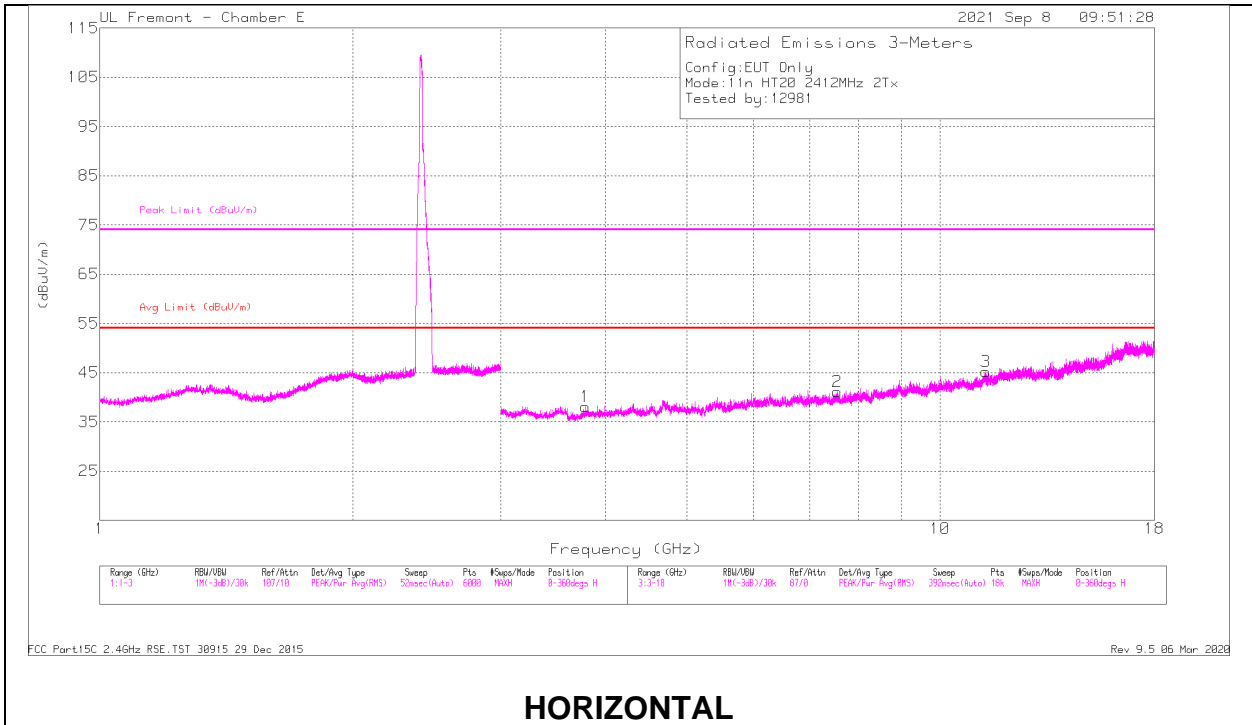

HORIZONTAL

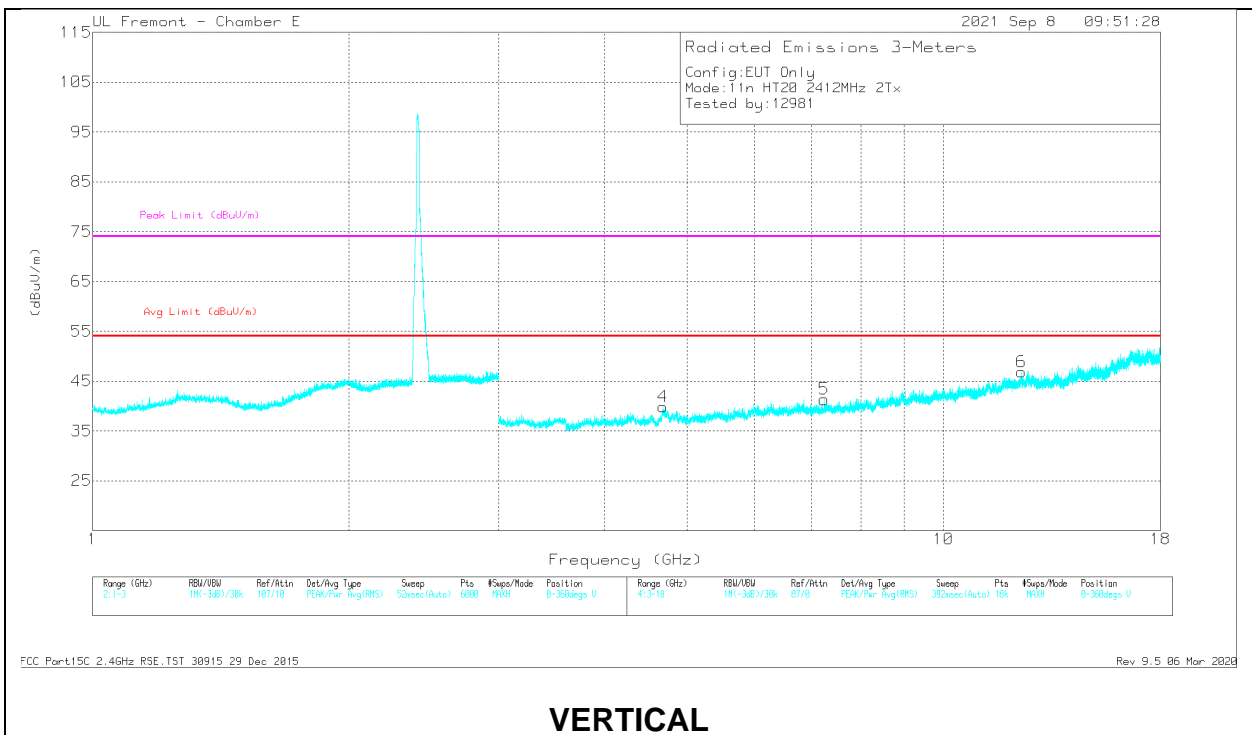

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.78545	42.56	PK2	33.3	-31.7	44.16	-	-	74	-29.84	74	127	H
	* 3.78589	30.94	MAv1	33.3	-31.7	32.54	54	-21.46	-	-	74	127	H
2	* 7.55478	38.33	PK2	35.8	-26.3	47.83	-	-	74	-26.17	135	162	H
	* 7.55161	26.32	MAv1	35.7	-26.3	35.72	54	-18.28	-	-	135	162	H
3	* 11.32867	36.64	PK2	38.1	-21.9	52.84	-	-	74	-21.16	89	191	H
	* 11.32968	23.82	MAv1	38.1	-21.9	40.02	54	-13.98	-	-	89	191	H
4	* 4.68288	40.67	PK2	34.4	-30.3	44.77	-	-	74	-29.23	136	172	V
	* 4.68343	28.88	MAv1	34.4	-30.4	32.88	54	-21.12	-	-	136	172	V
6	* 12.354	35.28	PK2	39	-21	53.28	-	-	74	-20.72	181	213	V
	* 12.35568	22.83	MAv1	39.1	-21	40.93	54	-13.07	-	-	181	213	V
5	7.23874	25.94	MAv1	35.7	-26.9	34.74	-	-	-	-	167	263	V
	7.24026	37.69	PK2	35.7	-26.9	46.49	-	-	-	-	167	263	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

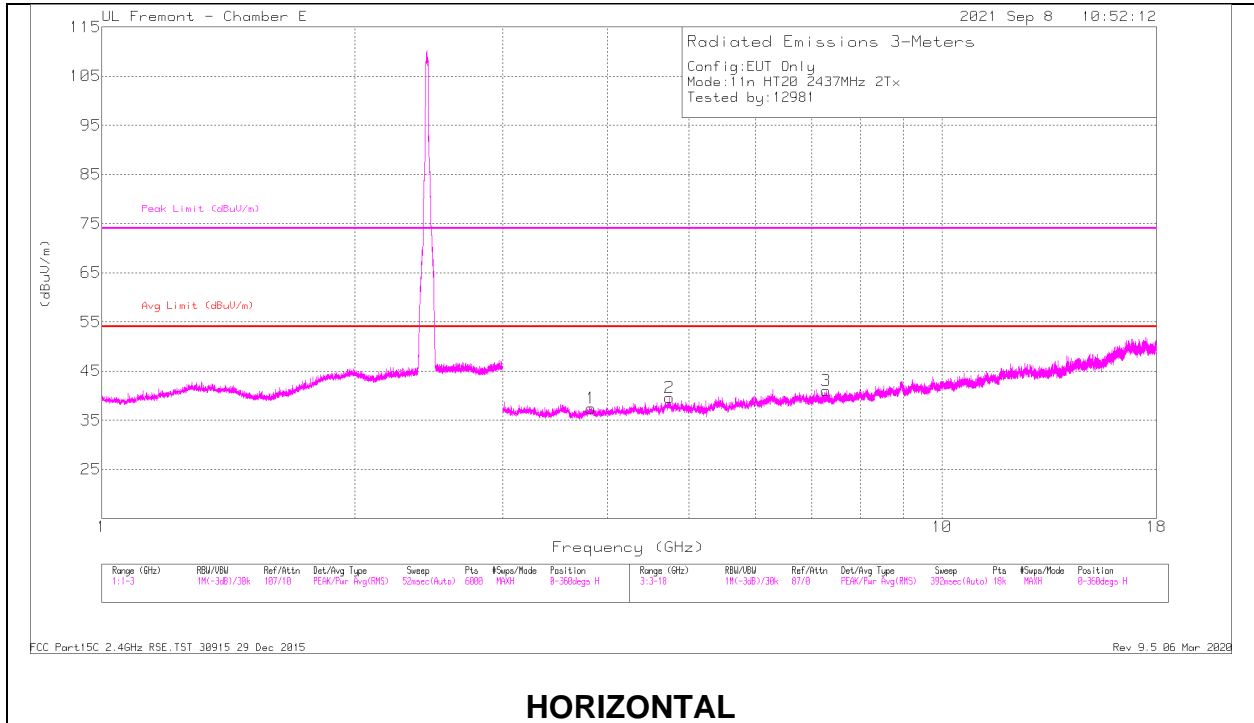

HORIZONTAL

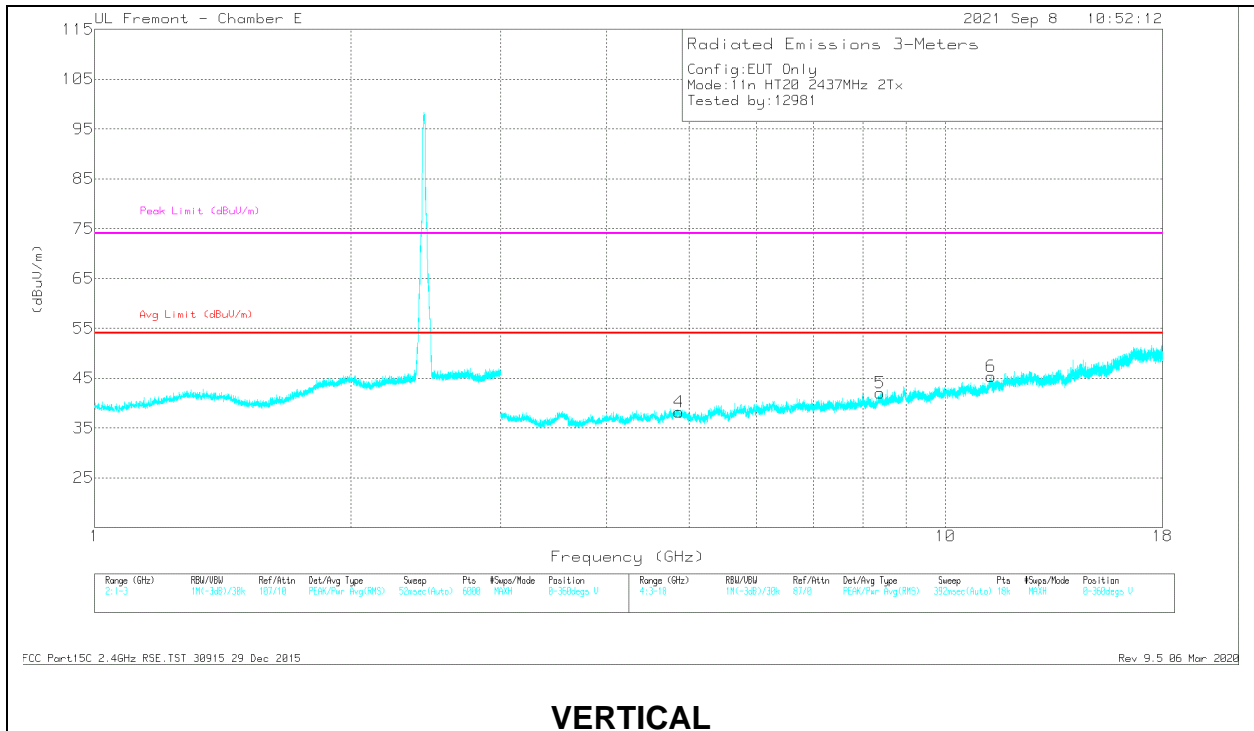

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.82473	42.6	PK2	33.4	-31.3	44.7	-	-	74	-29.3	266	166	H
	* 3.82541	30.3	MAv1	33.4	-31.2	32.50	54	-21.5	-	-	266	166	H
2	* 4.73613	40.7	PK2	34.5	-30.7	44.5	-	-	74	-29.5	184	213	H
	* 4.73618	29.13	MAv1	34.5	-30.7	32.93	54	-21.07	-	-	184	213	H
3	* 7.27854	37.95	PK2	35.7	-26.7	46.95	-	-	74	-27.05	223	238	H
	* 7.27792	25.49	MAv1	35.7	-26.7	34.49	54	-19.51	-	-	223	238	H
4	* 4.8607	40.72	PK2	34.3	-29.9	45.12	-	-	74	-28.88	210	194	V
	* 4.8618	28.95	MAv1	34.3	-29.9	33.35	54	-20.65	-	-	210	194	V
5	* 8.38048	37.24	PK2	35.9	-25	48.14	-	-	74	-25.86	197	244	V
	* 8.3791	25	MAv1	35.9	-25	35.9	54	-18.1	-	-	197	244	V
6	* 11.31027	35.48	PK2	38	-21.3	52.18	-	-	74	-21.82	162	267	V
	* 11.31239	23.4	MAv1	38	-21.4	40.00	54	-14.00	-	-	162	267	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

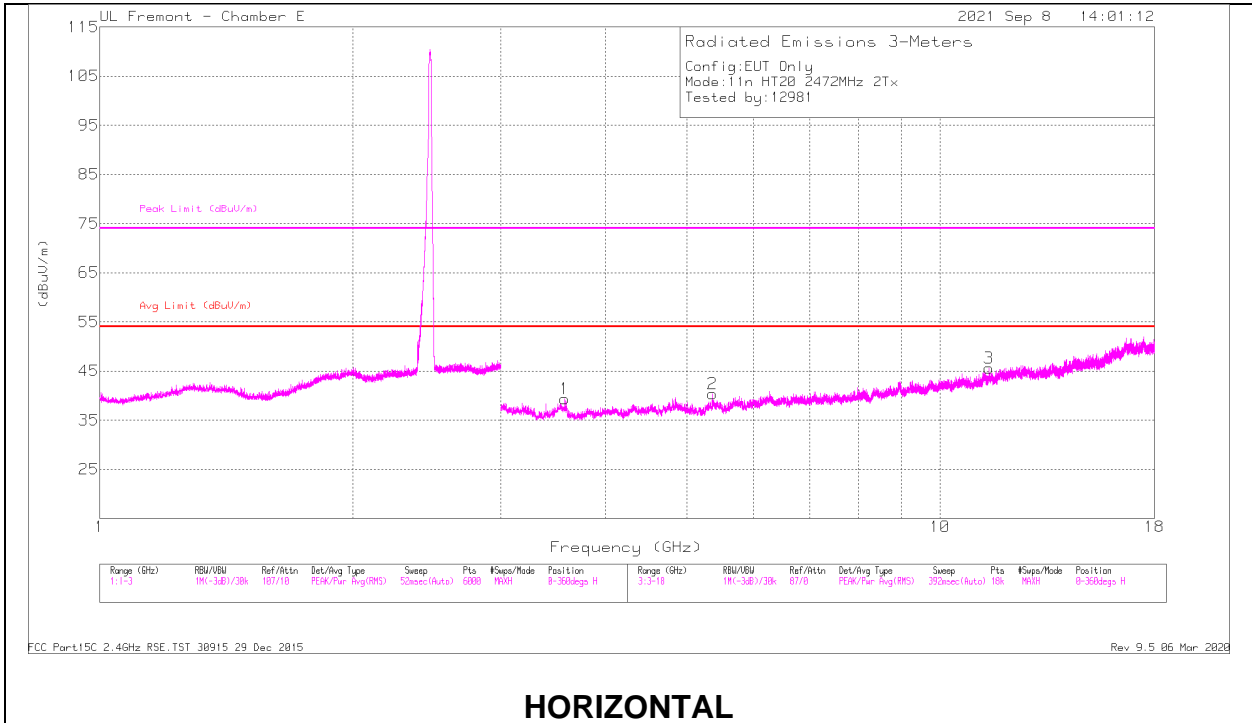

HORIZONTAL

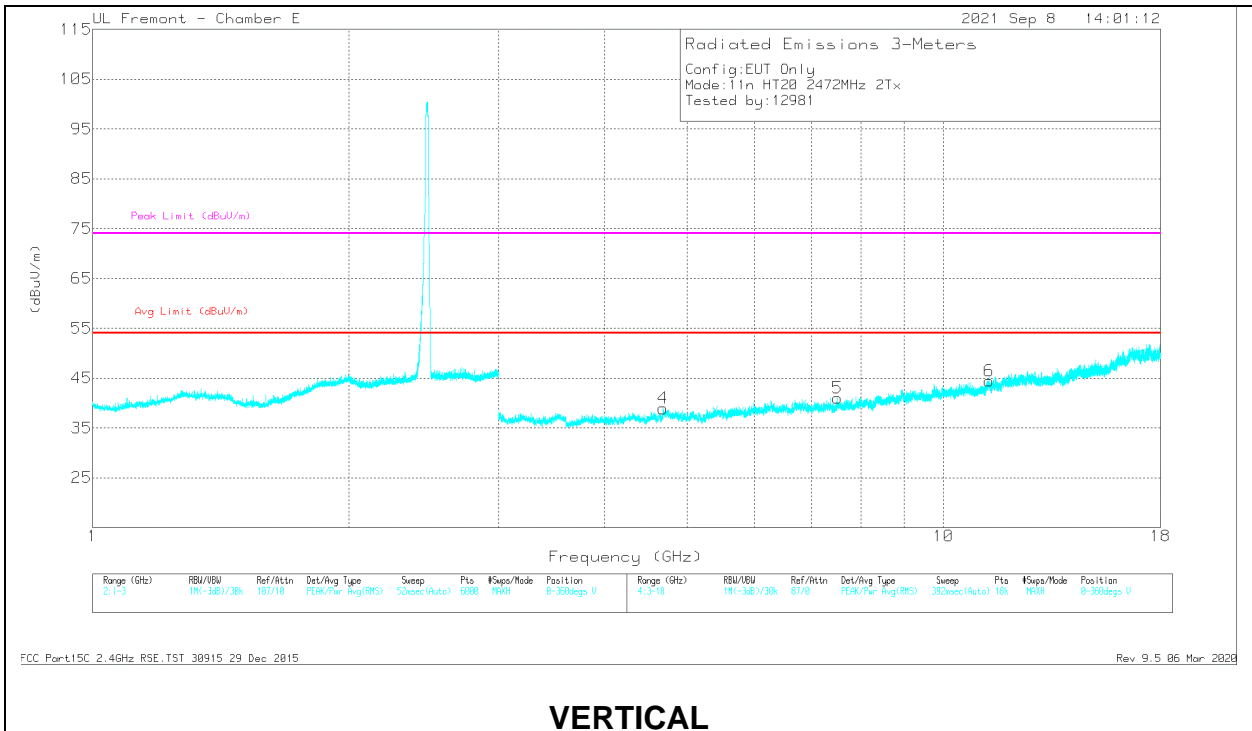

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0078107 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.5787	43.96	PK2	33.4	-31.9	45.46	-	-	74	-28.54	77	142	H
	* 3.58001	31.9	MAv1	33.4	-31.9	33.40	54	-20.6	-	-	77	142	H
2	* 5.35811	40.67	PK2	34.7	-30.1	45.27	-	-	74	-28.73	141	164	H
	* 5.35647	28.53	MAv1	34.7	-30.1	33.13	54	-20.87	-	-	141	164	H
3	* 11.43039	35.88	PK2	38.1	-22.2	51.78	-	-	74	-22.22	213	141	H
	* 11.4295	23.7	MAv1	38.1	-22.2	39.60	54	-14.4	-	-	213	141	H
4	* 4.6841	40.53	PK2	34.4	-30.4	44.53	-	-	74	-29.47	250	176	V
	* 4.6826	28.91	MAv1	34.4	-30.3	33.01	54	-20.99	-	-	250	176	V
5	* 7.50473	37.97	PK2	35.7	-26.3	47.37	-	-	74	-26.63	195	160	V
	* 7.50611	25.89	MAv1	35.8	-26.3	35.39	54	-18.61	-	-	195	160	V
6	* 11.31474	35.48	PK2	38	-21.4	52.08	-	-	74	-21.92	124	181	V
	* 11.31228	23.19	MAv1	38	-21.4	39.79	54	-14.21	-	-	124	181	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

10.1.6. 802.11ax HE20 SISO MODE

1TX ANT 2 MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

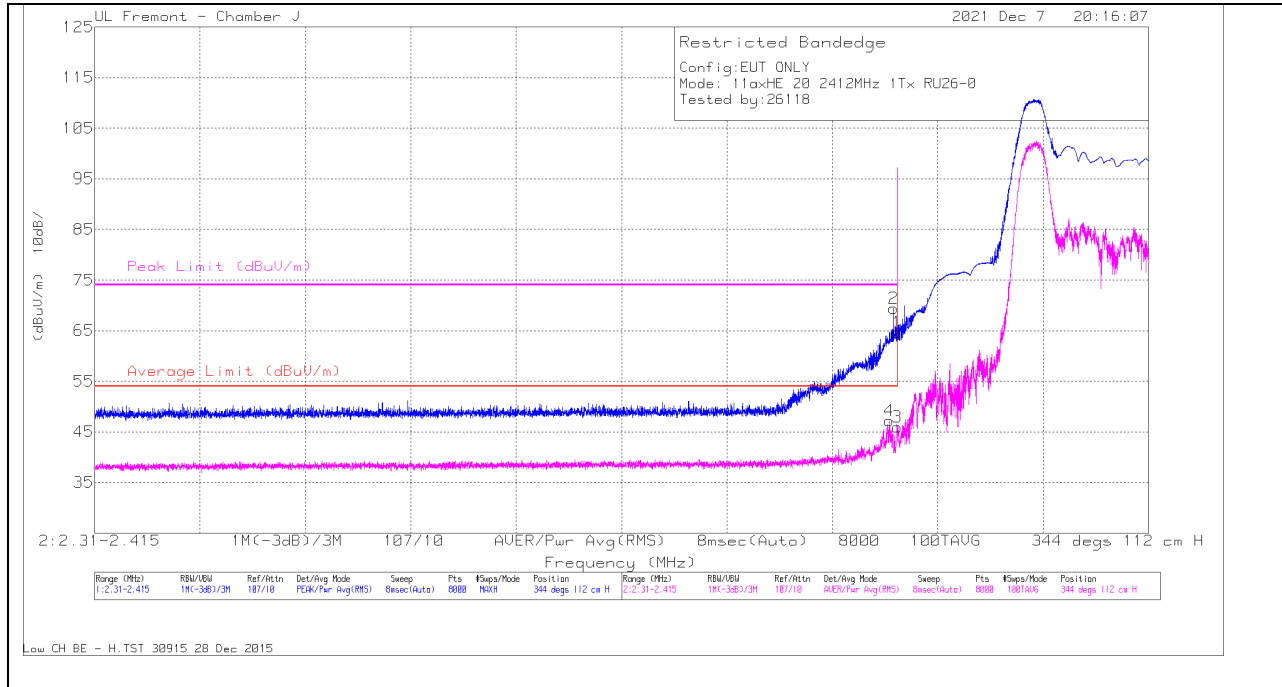


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	48.94	Pk	32	-16.2	0	64.74	-	-	74	-9.26	344	112	H
2	* 2389.6	53.57	Pk	32	-16.2	0	69.37	-	-	74	-4.63	344	112	H
3	* 2390	29.6	RMS	32	-16.2	.61	46.01	54	-7.99	-	-	344	112	H
4	* 2389.2	30.89	RMS	32	-16.2	.61	47.3	54	-6.7	-	-	344	112	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

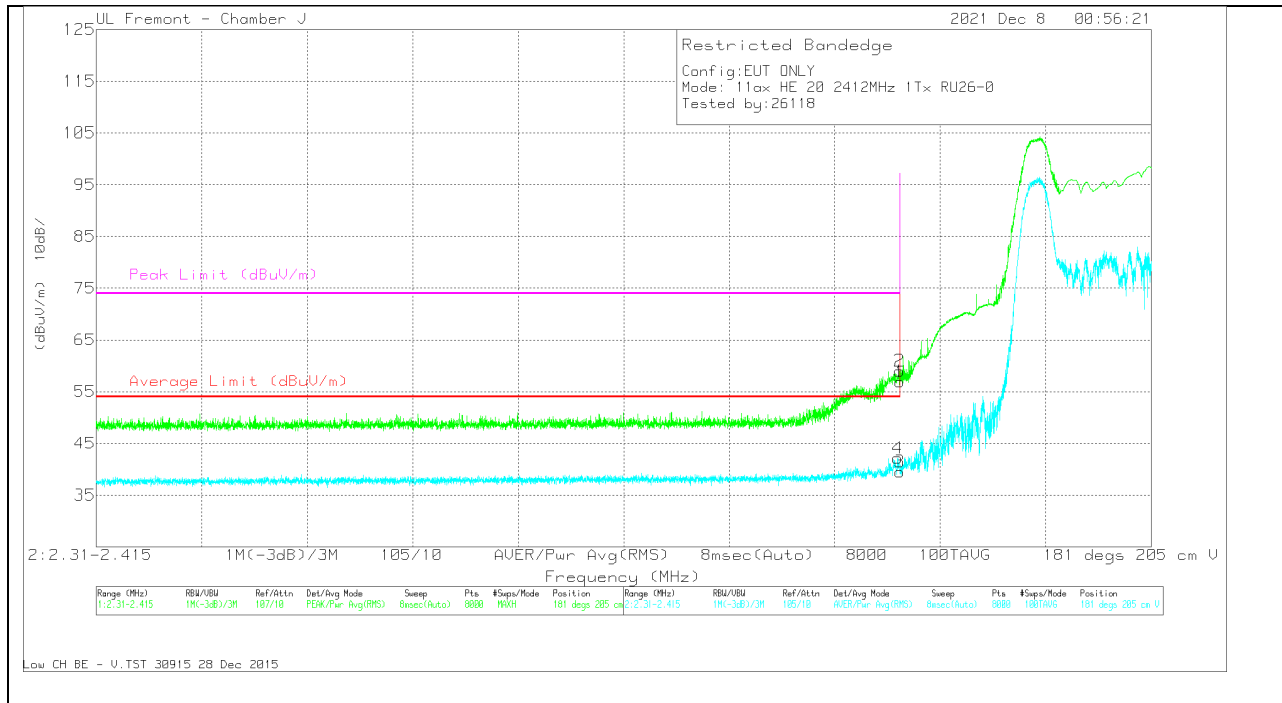

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	41.11	Pk	32	-16.2	0	56.91	-	-	74	-17.09	181	205	V
2	* 2389.9	43.21	Pk	32	-16.2	0	59.01	-	-	74	-14.99	181	205	V
3	* 2390	23.19	RMS	32	-16.2	.61	39.6	54	-14.4	-	-	181	205	V
4	* 2389.76	25.84	RMS	32	-16.2	.61	42.25	54	-11.75	-	-	181	205	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

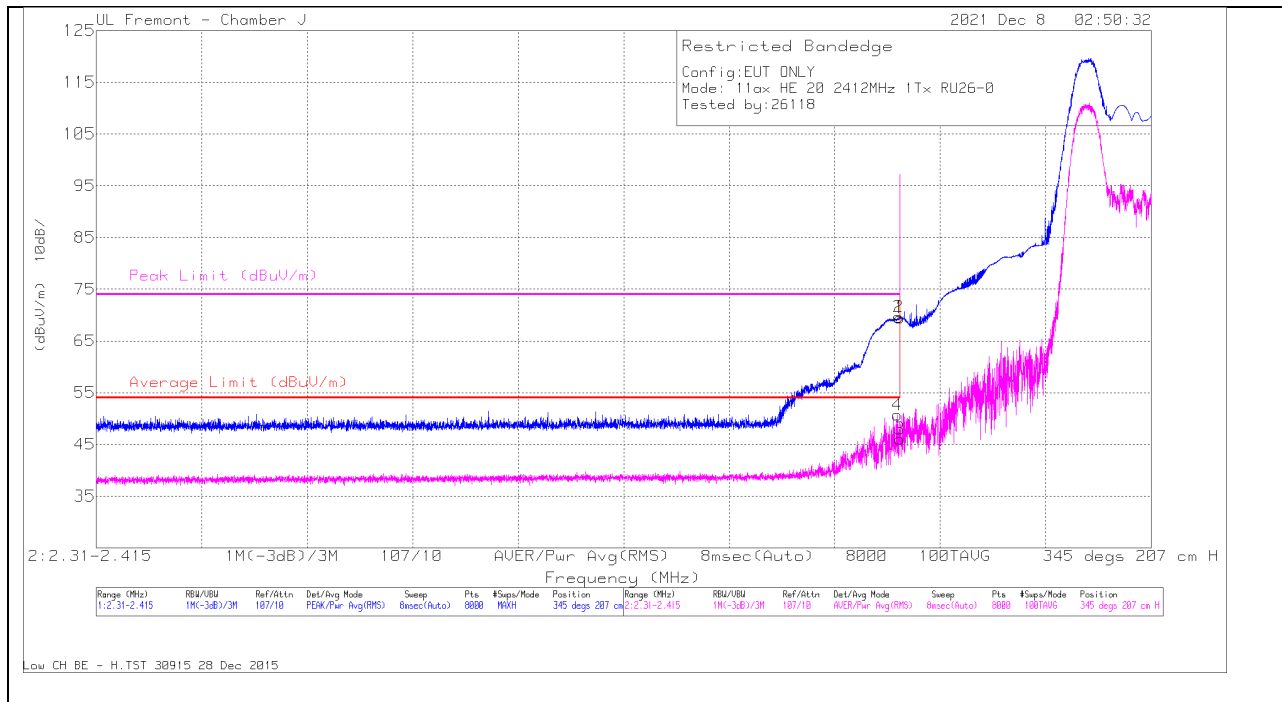

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	53.67	Pk	32	-16.2	0	69.47	-	-	74	-4.53	345	207	H
2	* 2389.9	53.84	Pk	32	-16.2	0	69.64	-	-	74	-4.36	345	207	H
3	* 2390	29.75	RMS	32	-16.2	.61	46.16	54	-7.84	-	-	345	207	H
4	* 2389.8	34.34	RMS	32	-16.2	.61	50.75	54	-3.25	-	-	345	207	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

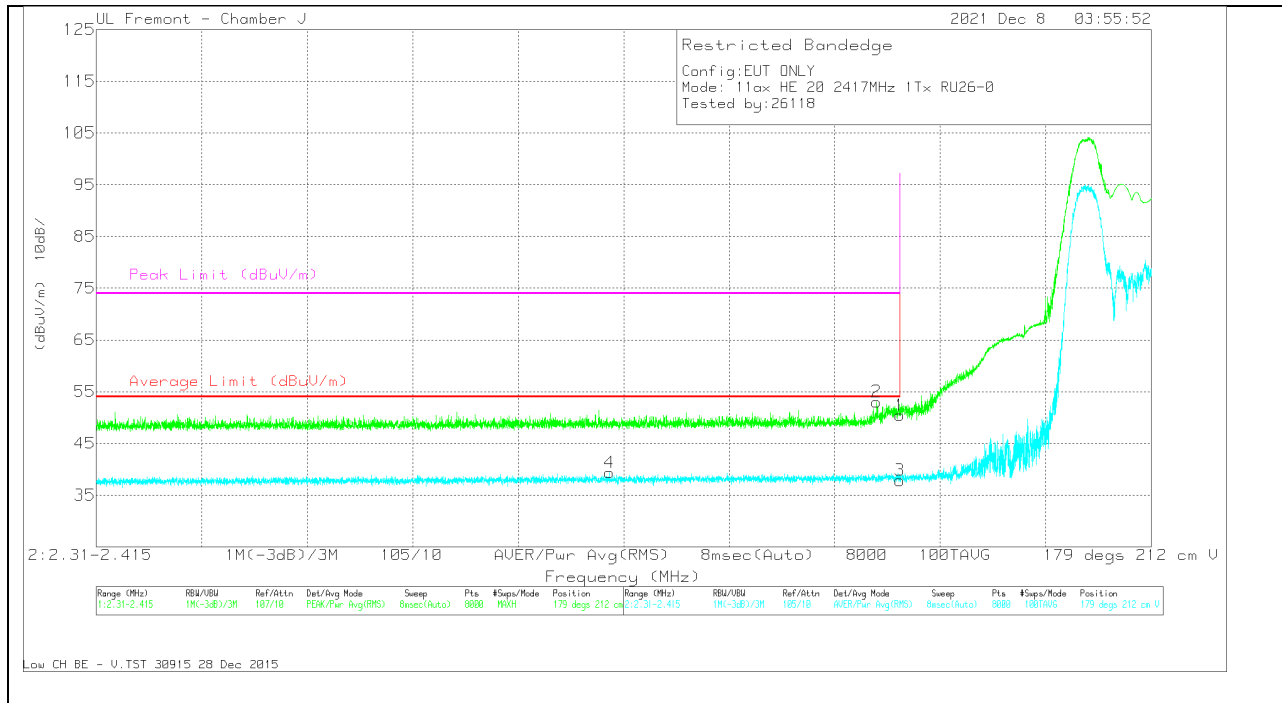


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	34.62	Pk	32	-16.2	0	50.42	-	-	74	-23.58	179	212	V
2	* 2387.7	37.23	Pk	32	-16.2	0	53.03	-	-	74	-20.97	179	212	V
3	* 2390	21.54	RMS	32	-16.2	.61	37.95	54	-16.05	-	-	179	212	V
4	* 2361.1	23.24	RMS	31.9	-16.3	.61	39.45	54	-14.55	-	-	179	212	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

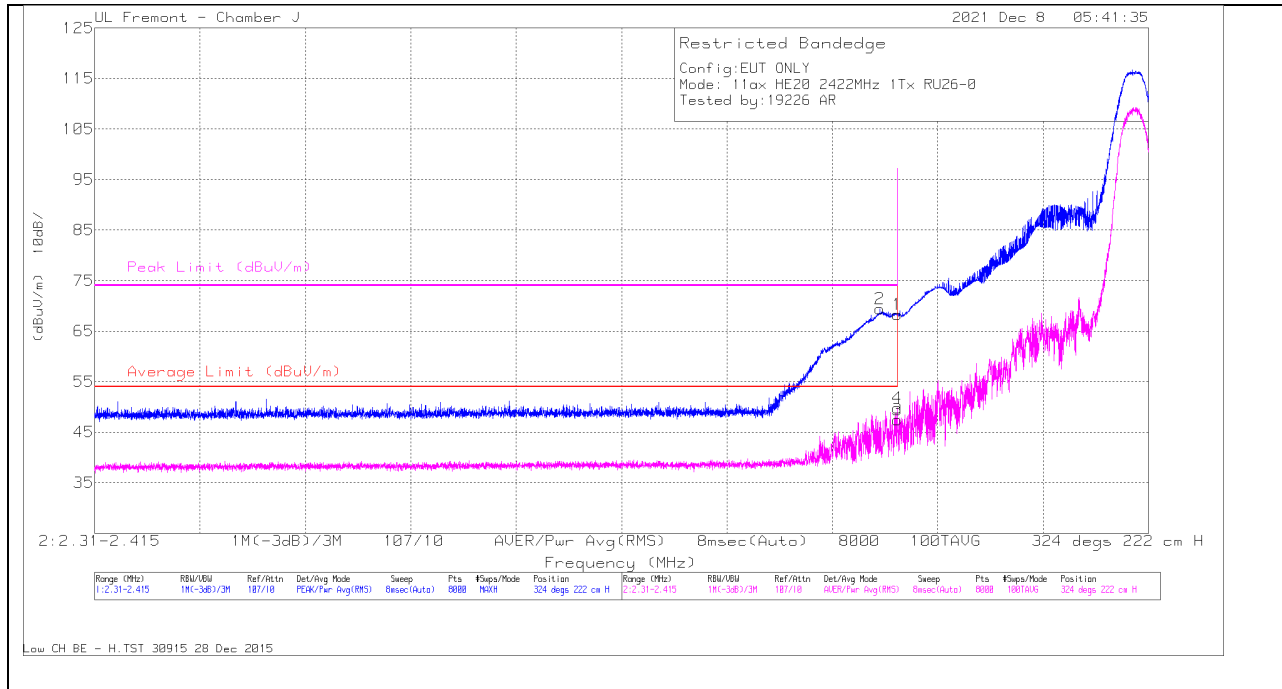

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	52.51	Pk	32	-16.2	0	68.31	-	-	74	-5.69	324	222	H
2	* 2388.2	53.6	Pk	32	-16.2	0	69.4	-	-	74	-4.6	324	222	H
3	* 2390	31.1	RMS	32	-16.2	.61	47.51	54	-6.49	-	-	324	222	H
4	* 2389.9	33.43	RMS	32	-16.2	.61	49.84	54	-4.16	-	-	324	222	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

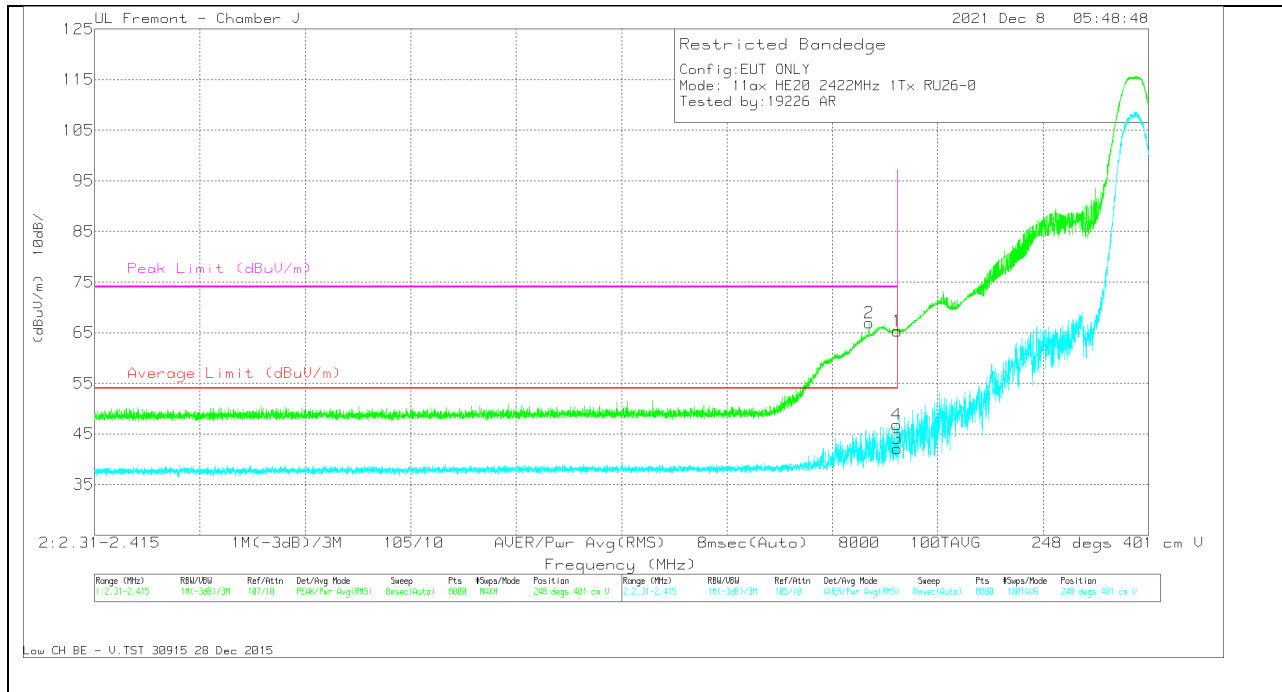

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	49.55	Pk	32	-16.2	0	65.35	-	-	74	-8.65	248	401	V
2	* 2387.1	51.15	Pk	32	-16.2	0	66.95	-	-	74	-7.05	248	401	V
3	* 2390	25.82	RMS	32	-16.2	.61	42.23	54	-11.77	-	-	248	401	V
4	* 2389.9	30.49	RMS	32	-16.2	.61	46.9	54	-7.1	-	-	248	401	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

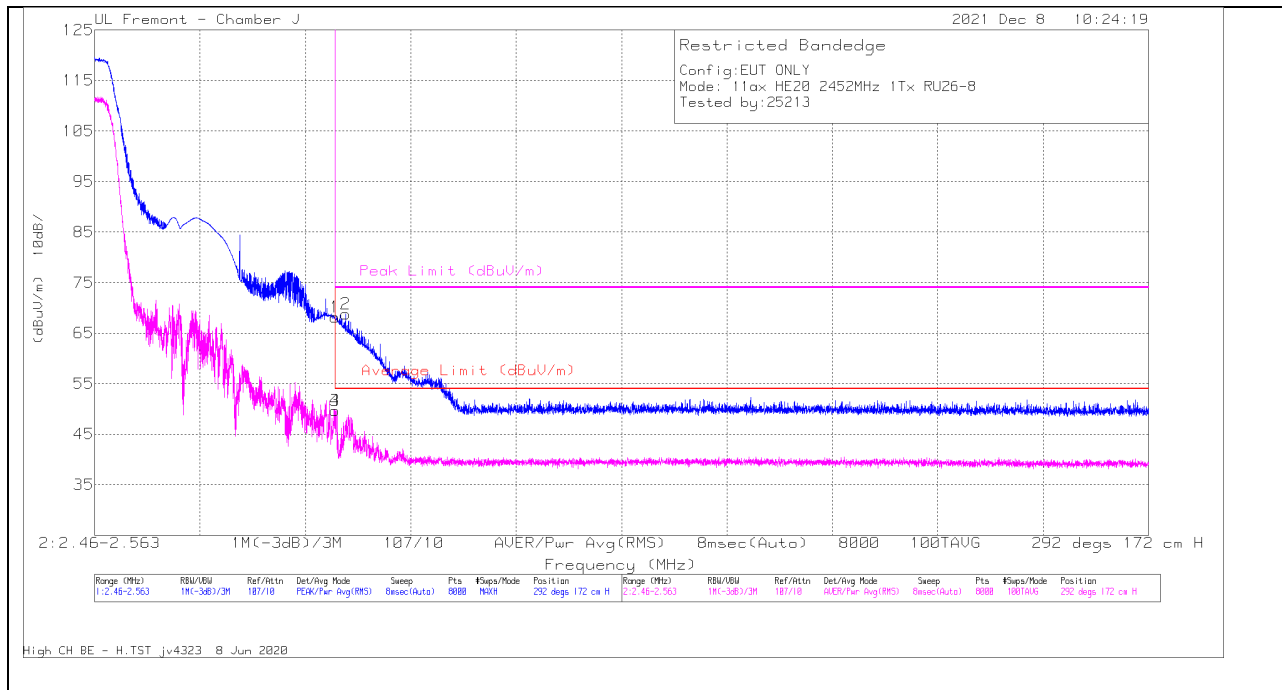


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	51.74	Pk	32.4	-16	0	68.14	-	-	74	-5.86	292	172	H
2	* 2484.5	52.39	Pk	32.4	-16	0	68.79	-	-	74	-5.21	292	172	H
3	* 2483.6	32.73	RMS	32.4	-16	.61	49.74	54	-4.26	-	-	292	172	H
4	* 2483.6	32.77	RMS	32.4	-16	.61	49.78	54	-4.22	-	-	292	172	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

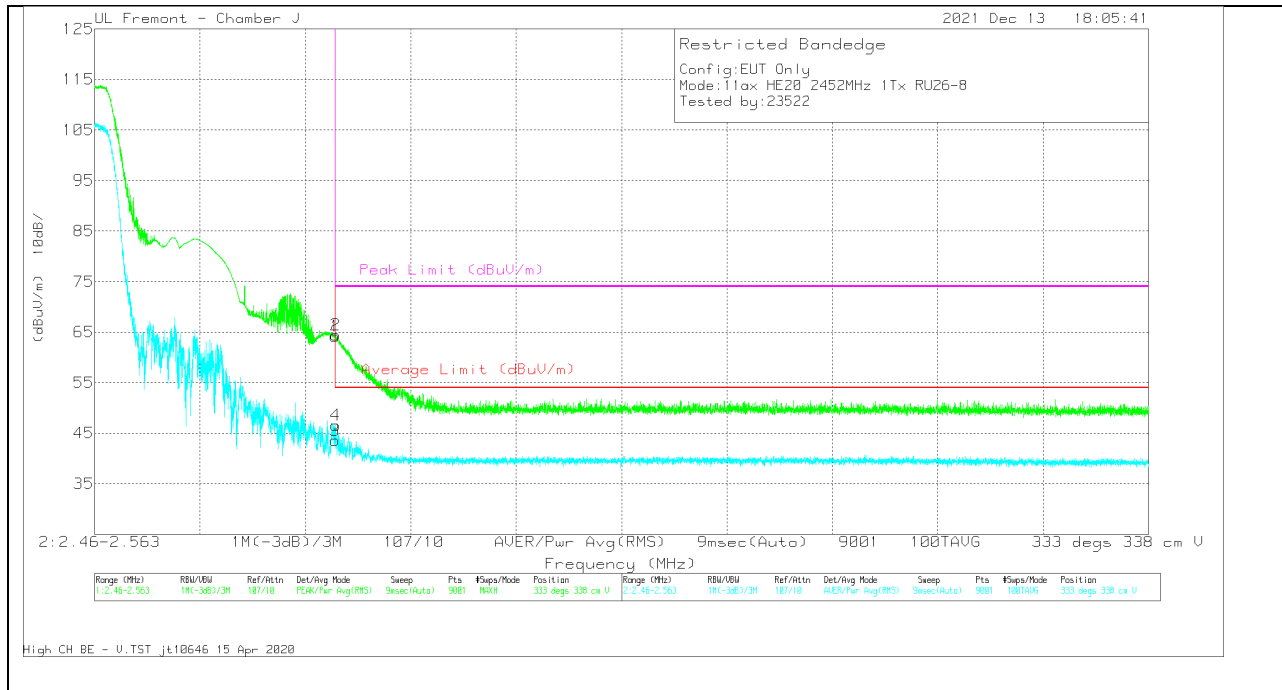

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cb I/Filtr/PA d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	58.86	Pk	32.4	-27.1	0	64.16	-	-	74	-9.84	333	338	V
2	* 2483.563	59.11	Pk	32.4	-27.1	0	64.41	-	-	74	-9.59	333	338	V
3	* 2483.5	37.8	RMS	32.4	-27.1	.61	43.71	54	-10.29	-	-	333	338	V
4	* 2483.529	40.8	RMS	32.4	-27.1	.61	46.71	54	-7.29	-	-	333	338	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

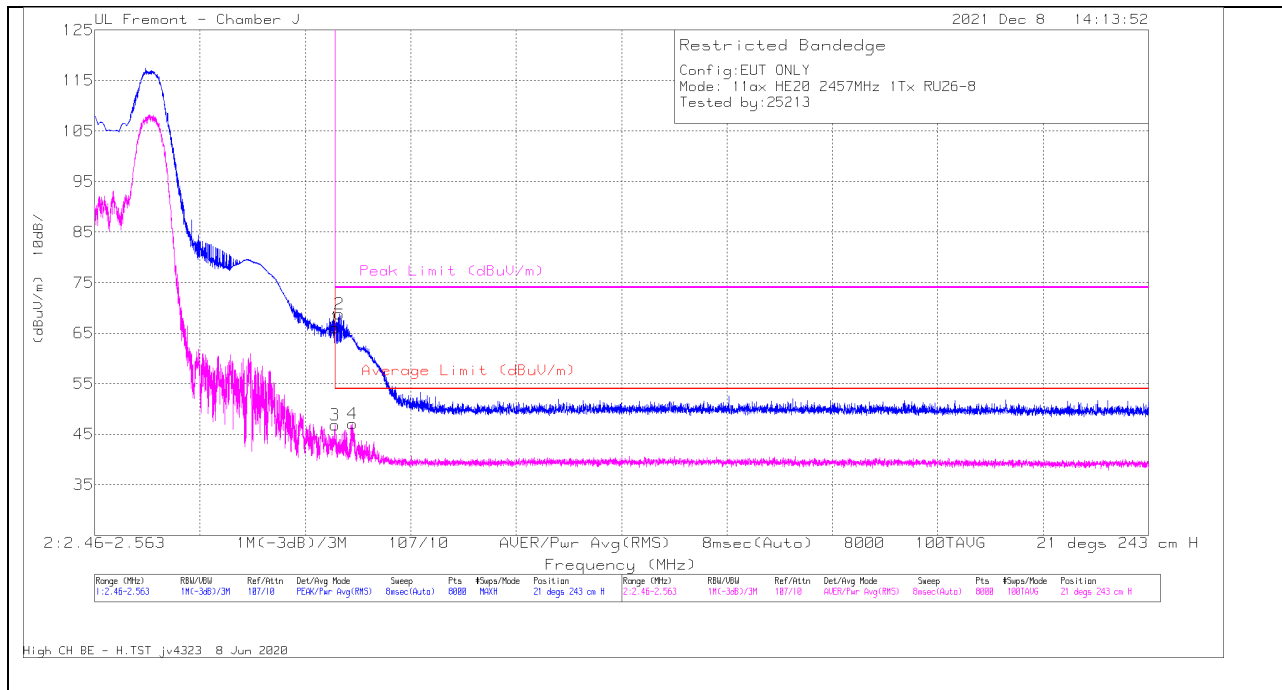


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	49.7	Pk	32.4	-16	0	66.1	-	-	74	-7.9	21	243	H
2	* 2483.93	52.39	Pk	32.4	-16	0	68.79	-	-	74	-5.21	21	243	H
3	* 2483.5	29.86	RMS	32.4	-16	.61	46.87	54	-7.13	-	-	21	243	H
4	* 2485.18	30.14	RMS	32.4	-16	.61	47.15	54	-6.85	-	-	21	243	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

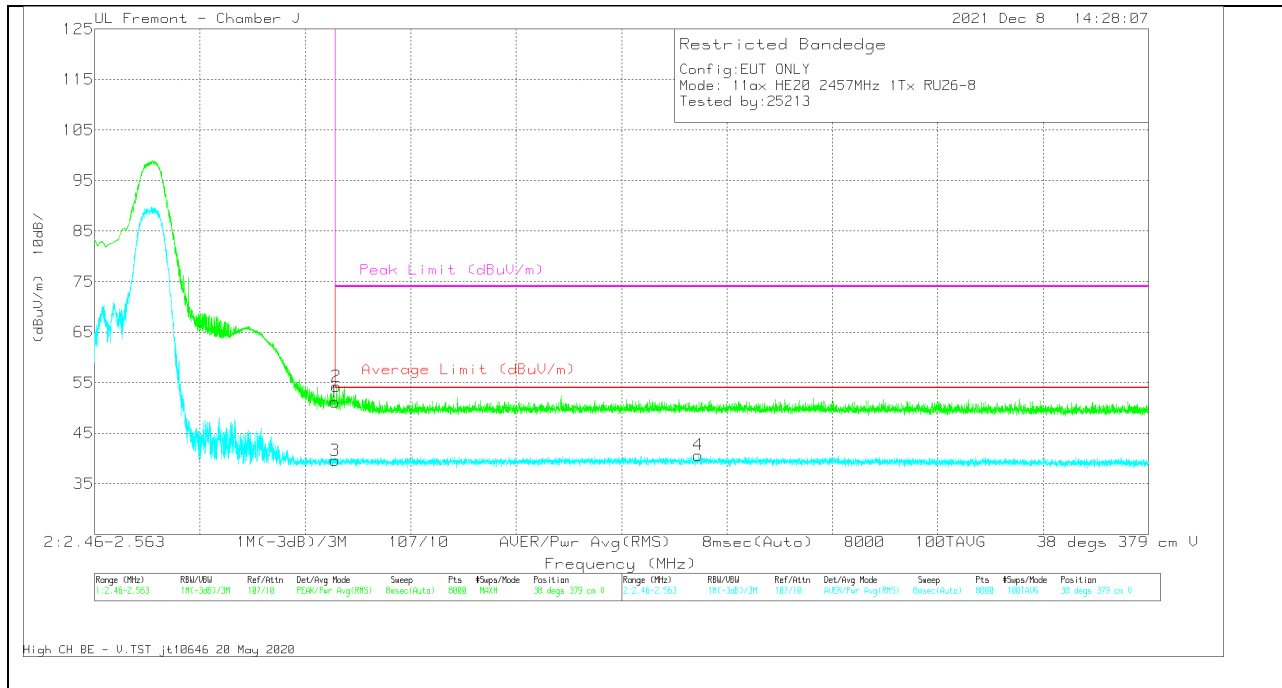

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	34.7	Pk	32.4	-16	0	51.1	-	-	74	-22.9	38	379	V
2	* 2483.6	37.92	Pk	32.4	-16	0	54.32	-	-	74	-19.68	38	379	V
3	* 2483.5	22.75	RMS	32.4	-16	.61	39.76	54	-14.24	-	-	38	379	V
4	2519.00	23.55	RMS	32.6	-16	.61	40.76	54	-13.24	-	-	38	379	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

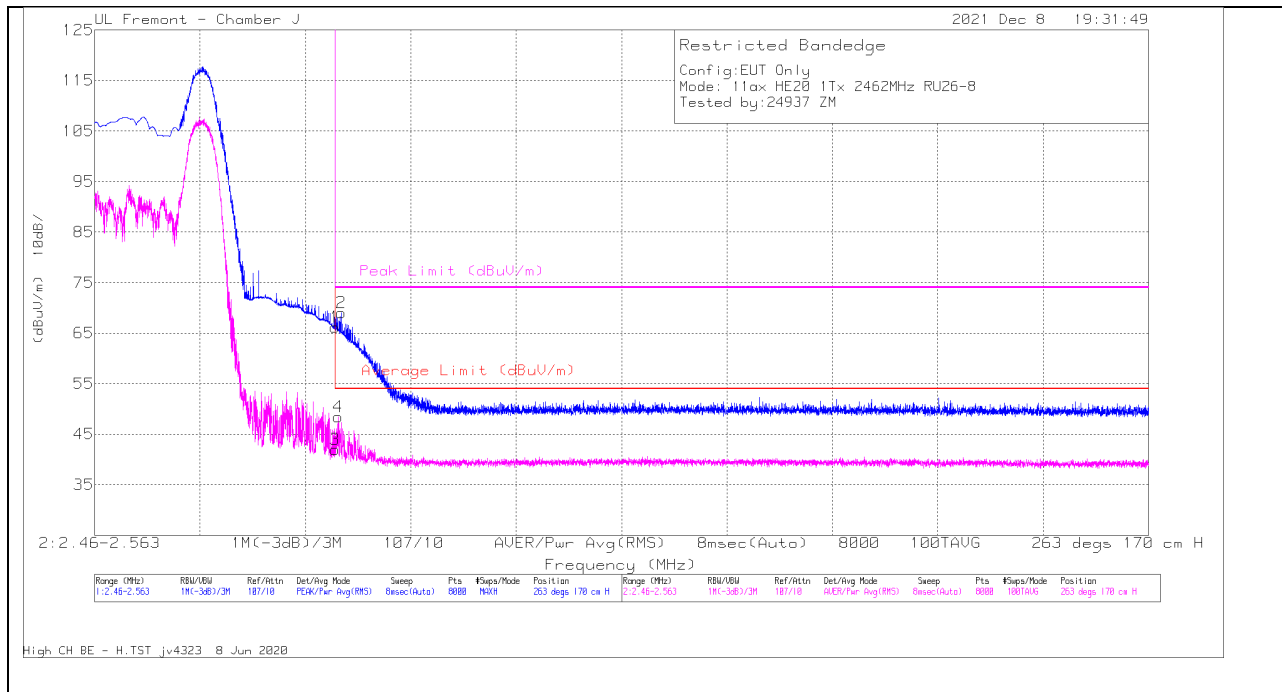

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	49.76	Pk	32.4	-16	0	66.16	-	-	74	-7.84	263	170	H
2	* 2484.08	52.69	Pk	32.4	-16	0	69.09	-	-	74	-4.91	263	170	H
3	* 2483.5	25	RMS	32.4	-16	.61	42.01	54	-11.99	-	-	263	170	H
4	* 2483.79	31.53	RMS	32.4	-16	.61	48.54	54	-5.46	-	-	263	170	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

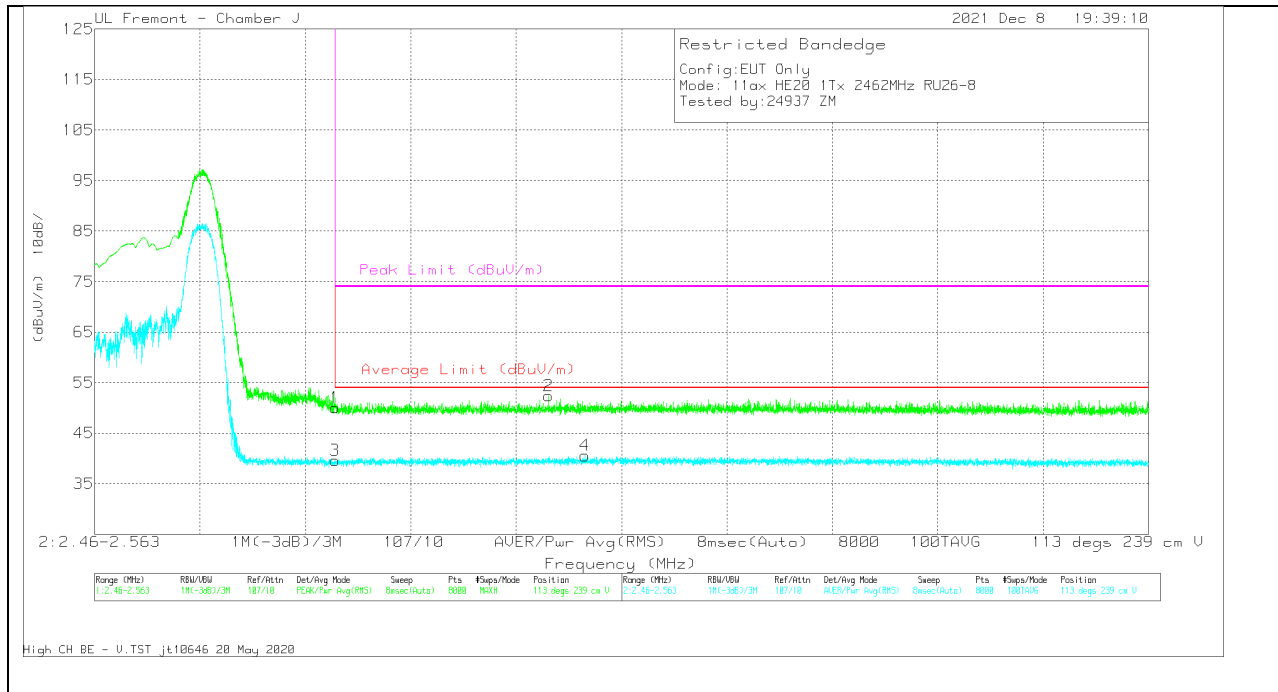


Marker	Frequen- cy (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	33.63	Pk	32.4	-16	0	50.03	-	-	74	-23.97	113	239	V
2	2504.36	35.86	Pk	32.5	-16	0	52.36	-	-	74	-21.64	113	239	V
3	* 2483.5	22.67	RMS	32.4	-16	.61	39.68	54	-14.32	-	-	113	239	V
4	2507.9	23.53	RMS	32.5	-16	.61	40.64	54	-13.36	-	-	113	239	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

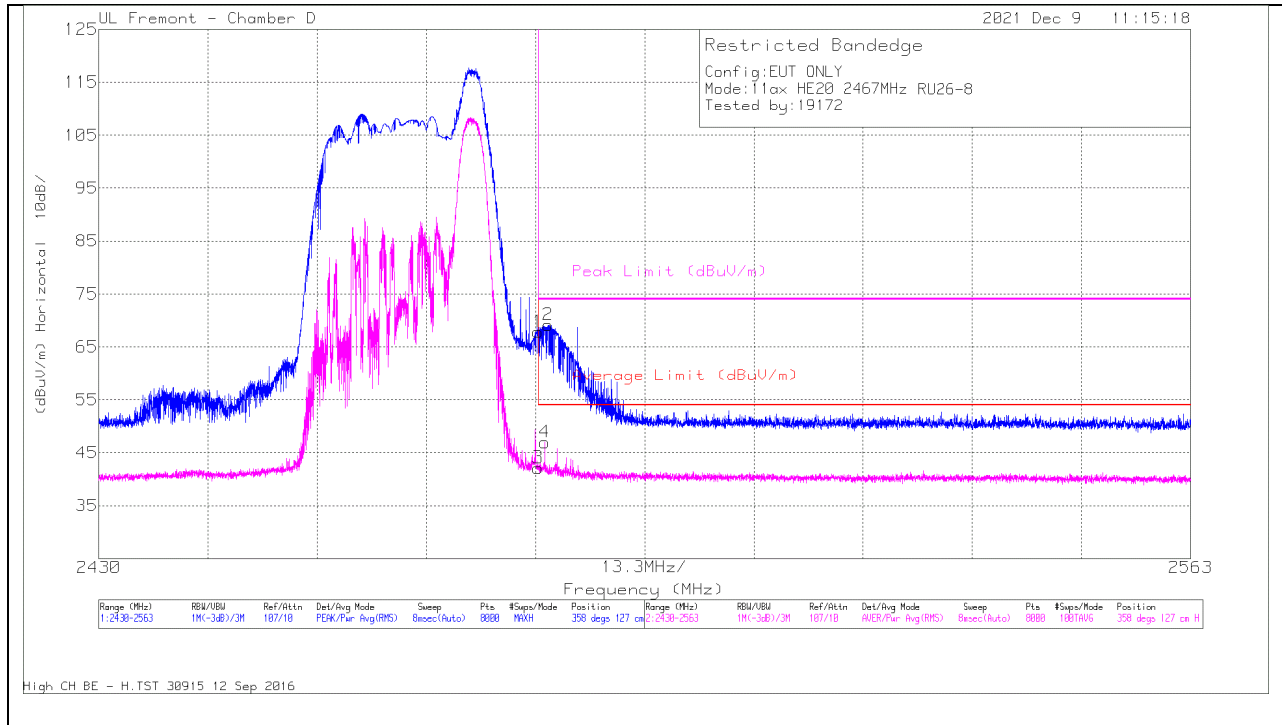


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	55.8	Pk	32.7	-20.7	0	67.8	-	-	74	-6.2	358	127	H
2	* 2484.72	57.13	Pk	32.7	-20.7	0	69.13	-	-	74	-4.87	358	127	H
3	* 2483.5	29.61	RMS	32.7	-20.7	.61	42.22	54	-11.78	-	-	358	127	H
4	* 2484.30	34.45	RMS	32.7	-20.7	.61	47.06	54	-6.94	-	-	358	127	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

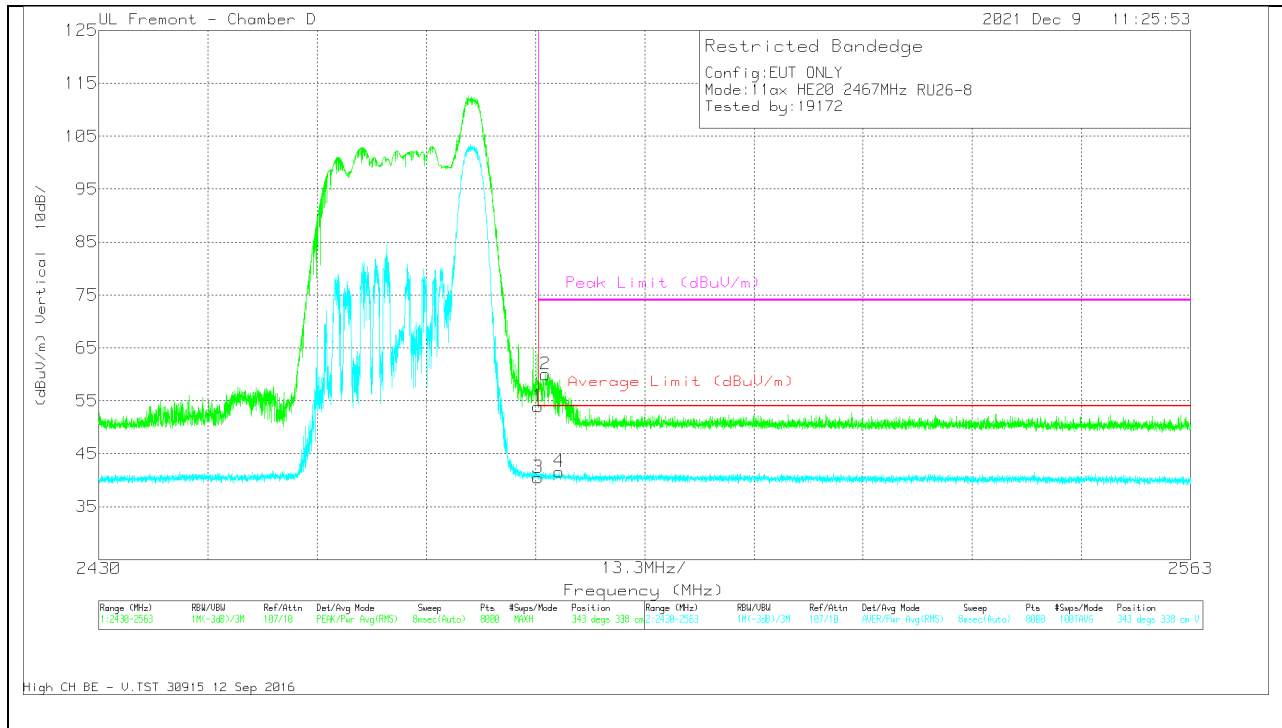


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	41.92	Pk	32.7	-20.7	0	53.92	-	-	74	-20.08	343	338	V
2	* 2484.39	48.02	Pk	32.7	-20.7	0	60.02	-	-	74	-13.98	343	338	V
3	* 2483.5	27.99	RMS	32.7	-20.7	.61	40.6	54	-13.4	-	-	343	338	V
4	* 2486.09	29.12	RMS	32.7	-20.7	.61	41.73	54	-12.27	-	-	343	338	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

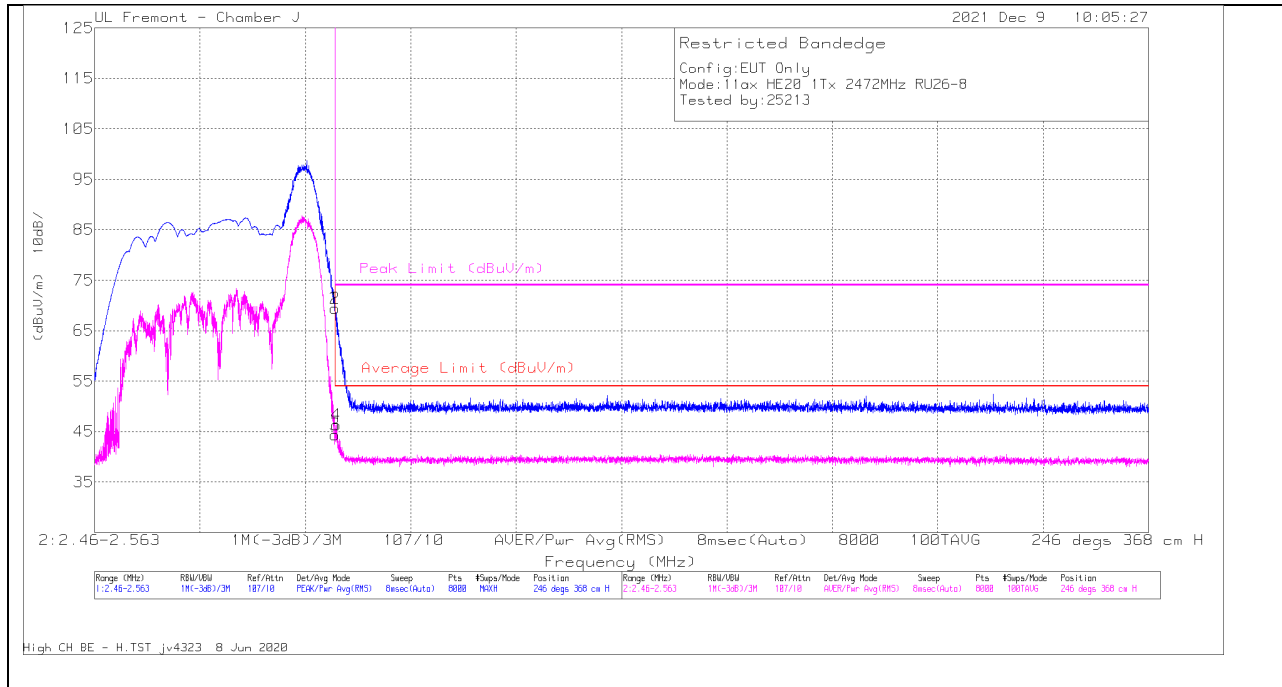


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	52.98	Pk	32.4	-16	0	69.38	-	-	74	-4.62	246	368	H
2	* 2483.50	53.02	Pk	32.4	-16	0	69.42	-	-	74	-4.58	246	368	H
3	* 2483.5	27.47	RMS	32.4	-16	.61	44.48	54	-9.52	-	-	246	368	H
4	* 2483.59	29.41	RMS	32.4	-16	.61	46.42	54	-7.58	-	-	246	368	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

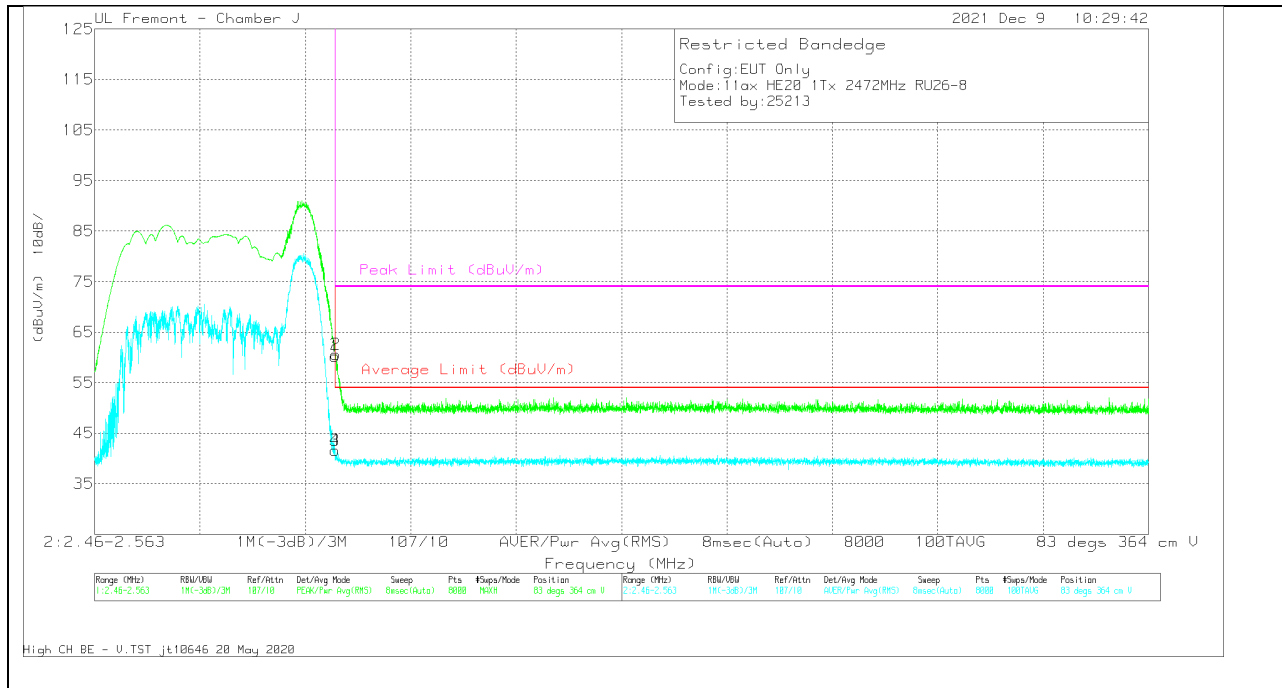

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	43.85	Pk	32.4	-16	0	60.25	-	-	74	-13.75	83	364	V
2	* 2483.565	44.25	Pk	32.4	-16	0	60.65	-	-	74	-13.35	83	364	V
3	* 2483.5	24.68	RMS	32.4	-16	.61	41.69	54	-12.31	-	-	83	364	V
4	* 2483.50	24.69	RMS	32.4	-16	.61	41.7	54	-12.3	-	-	83	364	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX ANT 2 MODE: RU242-61

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

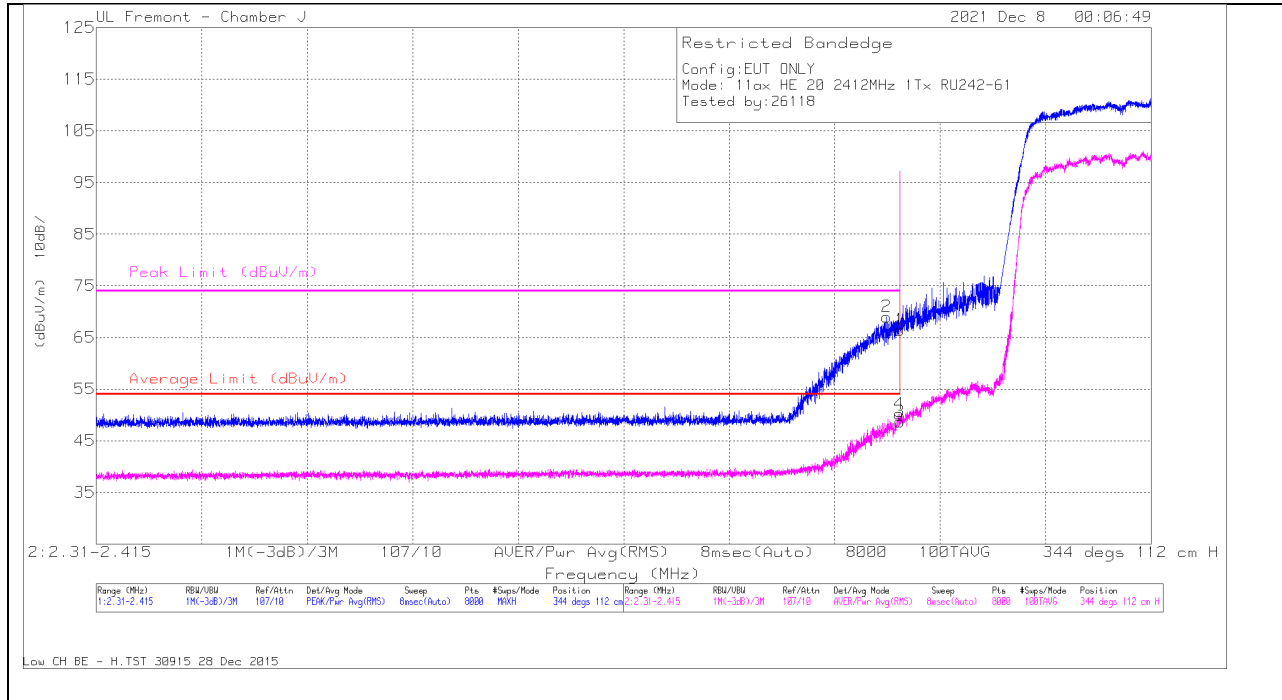


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	50.65	Pk	32	-16.2	0	66.45	-	-	74	-7.55	344	112	H
2	* 2388.7	53.21	Pk	32	-16.2	0	69.01	-	-	74	-4.99	344	112	H
3	* 2390	32.28	RMS	32	-16.2	.61	48.69	54	-5.31	-	-	344	112	H
4	* 2389.93	33.76	RMS	32	-16.2	.61	50.17	54	-3.83	-	-	344	112	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

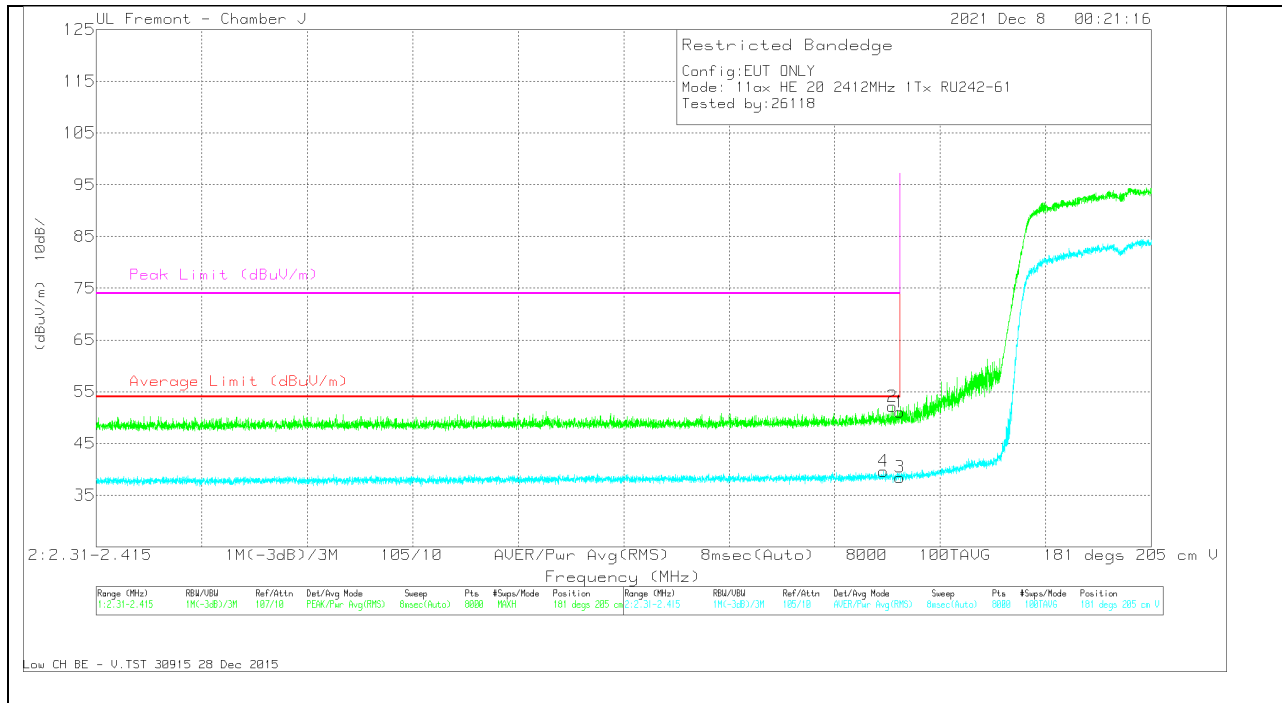

Marker	Frequen cy (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	35.26	Pk	32	-16.2	0	51.06	-	-	74	-22.94	181	205	V
2	* 2389.2	36.34	Pk	32	-16.2	0	52.14	-	-	74	-21.86	181	205	V
3	* 2390	22.03	RMS	32	-16.2	.61	38.44	54	-15.56	-	-	181	205	V
4	* 2388.4	23.2	RMS	32	-16.2	.61	39.61	54	-14.39	-	-	181	205	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

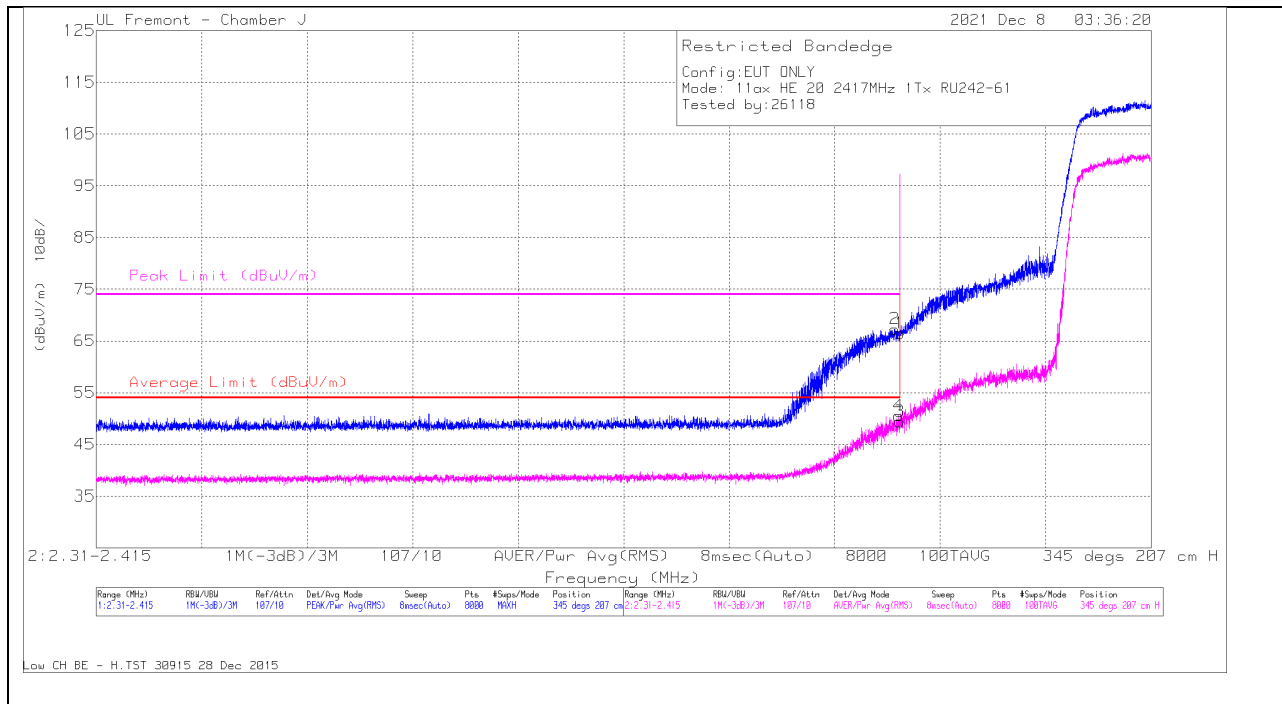


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cb I/Filtr/PA d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	50.67	Pk	32	-16.2	0	66.47	-	-	74	-7.53	345	207	H
2	* 2389.5	51.51	Pk	32	-16.2	0	67.31	-	-	74	-6.69	345	207	H
3	* 2390	33.02	RMS	32	-16.2	.61	49.43	54	-4.57	-	-	345	207	H
4	* 2389.9	34.14	RMS	32	-16.2	.61	50.55	54	-3.45	-	-	345	207	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

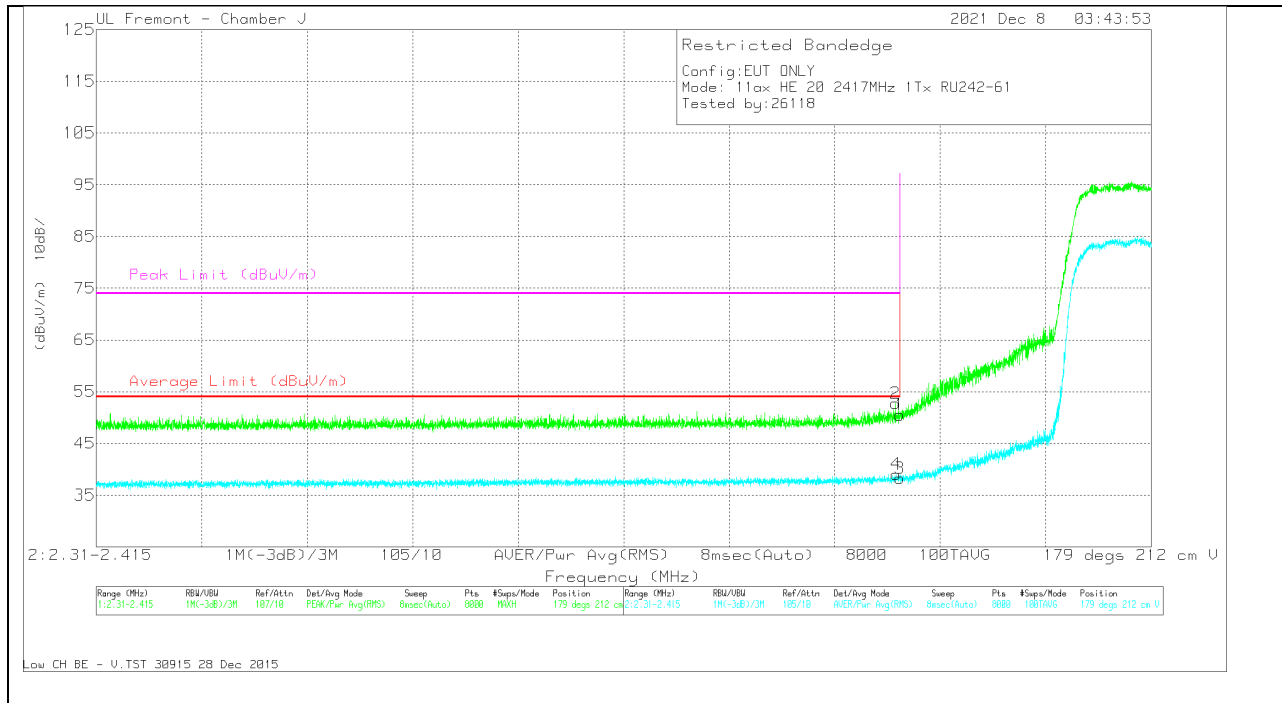

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	34.73	Pk	32	-16.2	0	50.53	-	-	74	-23.47	179	212	V
2	* 2389.52	36.93	Pk	32	-16.2	0	52.73	-	-	74	-21.27	179	212	V
3	* 2390	22.43	RMS	32	-16.2	.61	38.83	54	-15.17	-	-	179	212	V
4	* 2389.60	23.24	RMS	32	-16.2	.61	39.65	54	-14.35	-	-	179	212	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

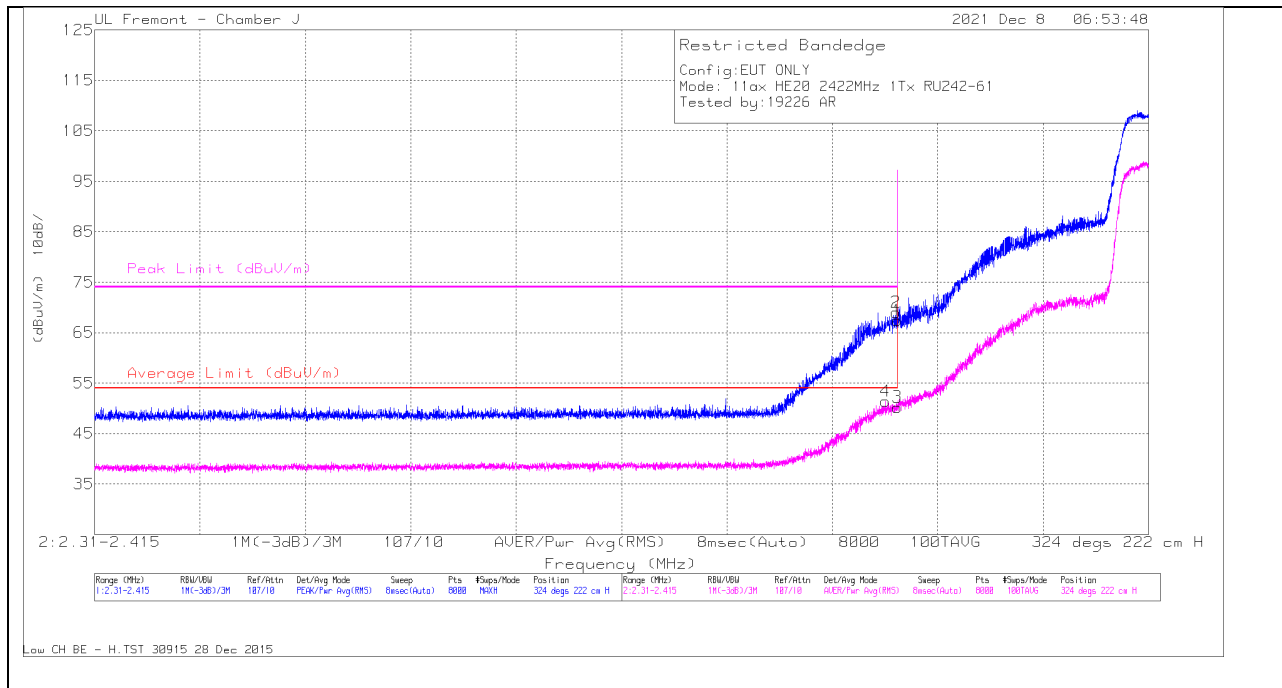


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	51.57	Pk	32	-16.2	0	67.37	-	-	74	-6.63	324	222	H
2	* 2389.84	53.2	Pk	32	-16.2	0	69	-	-	74	-5	324	222	H
3	* 2390	33.82	RMS	32	-16.2	.61	50.23	54	-3.77	-	-	324	222	H
4	* 2388.80	35	RMS	32	-16.2	.61	51.41	54	-2.59	-	-	324	222	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

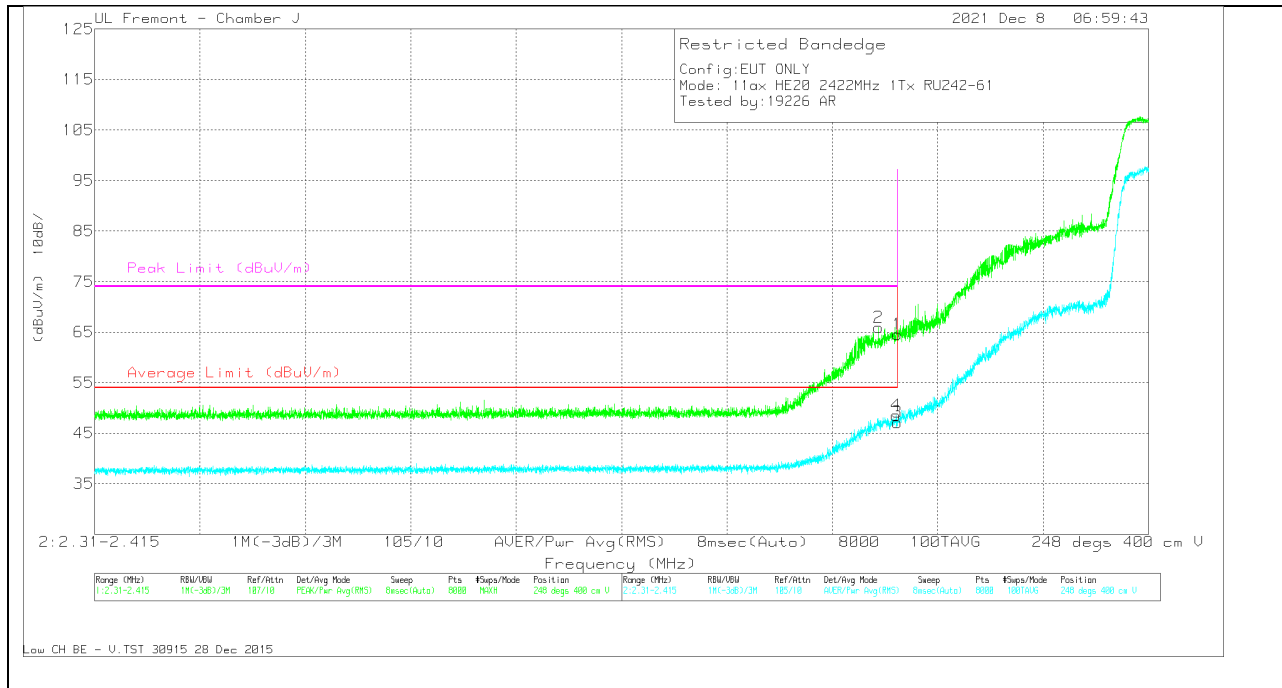


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	48.75	Pk	32	-16.2	0	64.55	-	-	74	-9.45	248	400	V
2	* 2388.12	50.19	Pk	32	-16.2	0	65.99	-	-	74	-8.01	248	400	V
3	* 2390	30.87	RMS	32	-16.2	.61	47.28	54	-6.72	-	-	248	400	V
4	* 2389.88	32.25	RMS	32	-16.2	.61	48.81	54	-5.19	-	-	248	400	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

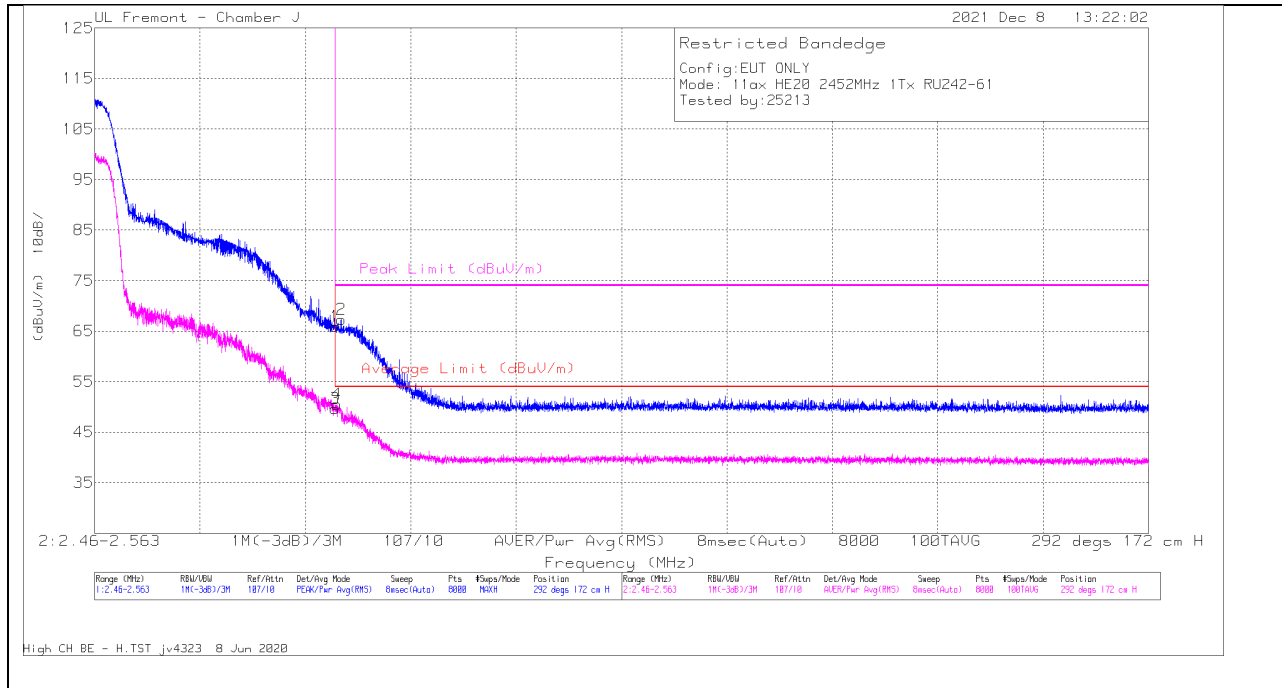

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	49.57	Pk	32.4	-16	0	65.97	-	-	74	-8.03	292	172	H
2	* 2484.11	50.85	Pk	32.4	-16	0	67.25	-	-	74	-6.75	292	172	H
3	* 2483.5	32.64	RMS	32.4	-16	.61	49.65	54	-4.35	-	-	292	172	H
4	* 2483.69	33.57	RMS	32.4	-16	.61	50.58	54	-3.42	-	-	292	172	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

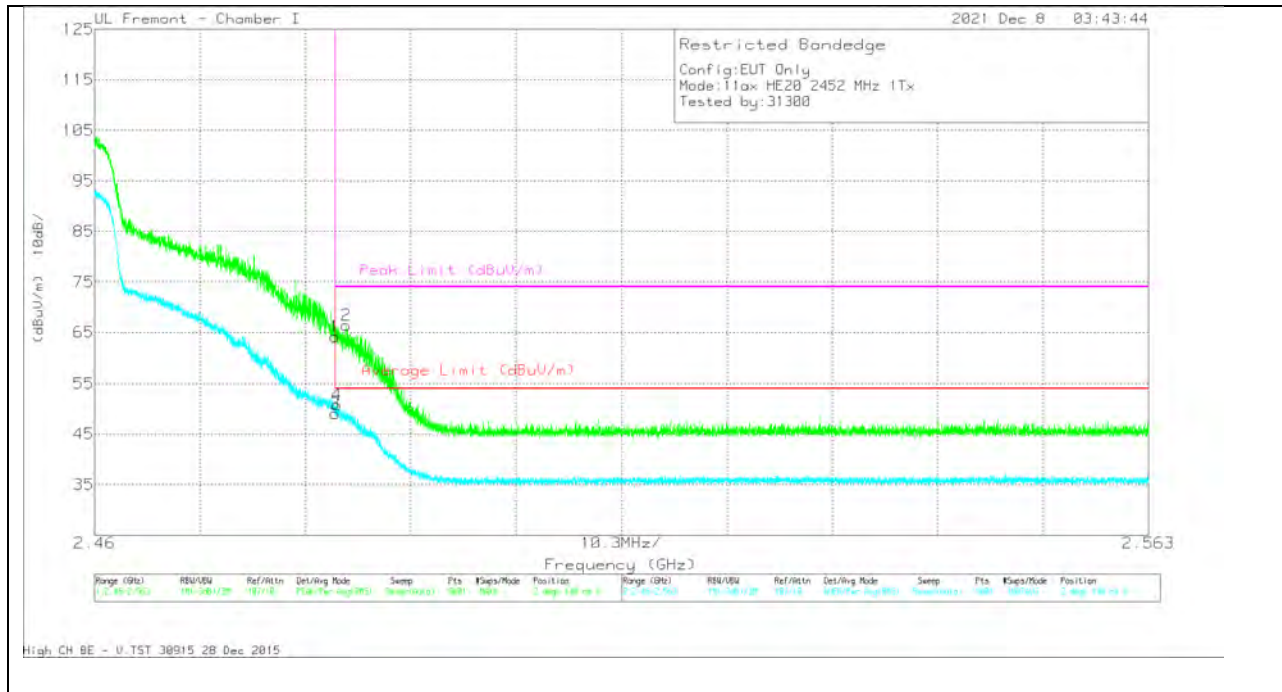

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	51.34	Pk	32.1	-19.2	0	64.24	-	-	74	-9.76	2	148	V
2	* 2.48462	53.52	Pk	32.1	-19.2	0	66.42	-	-	74	-7.58	2	148	V
3	* 2.4835	35.58	RMS	32.1	-19.2	.61	49.09	54	-4.91	-	-	2	148	V
4	* 2.48368	37.36	RMS	32.1	-19.2	.61	50.87	54	-3.13	-	-	2	148	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

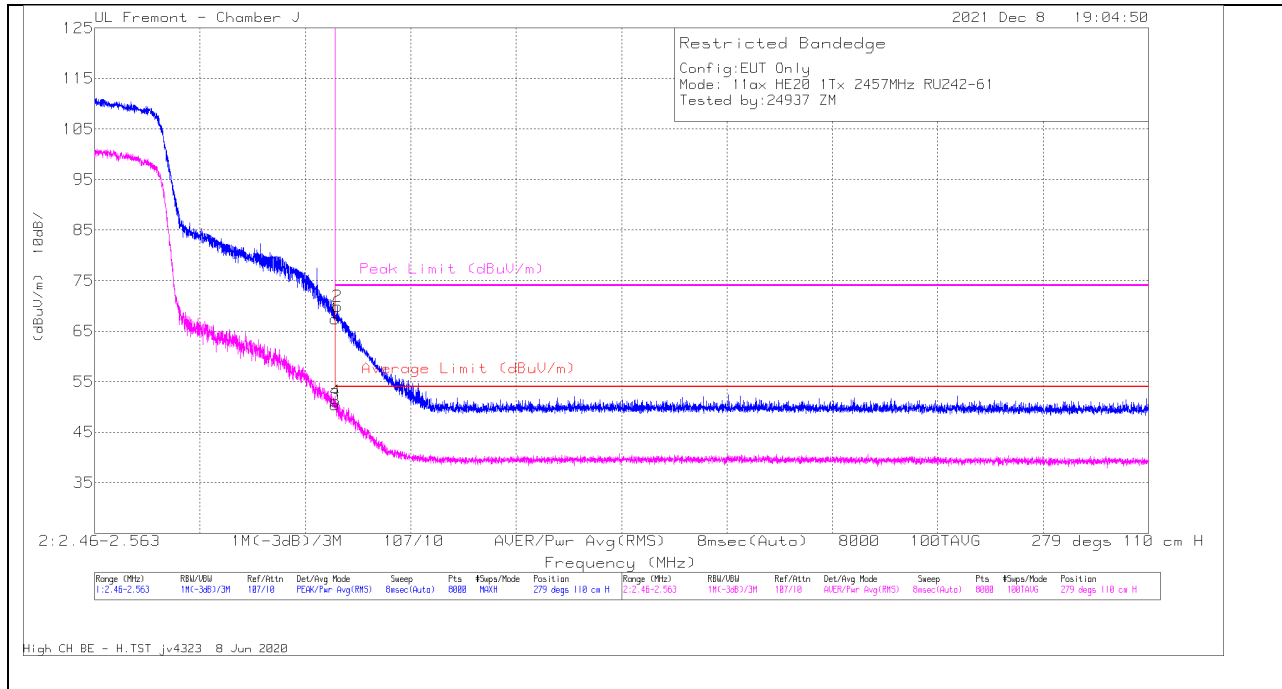


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	51.07	Pk	32.4	-16	0	67.47	-	-	74	-6.53	279	110	H
2	* 2483.72	53.5	Pk	32.4	-16	0	69.9	-	-	74	-4.1	279	110	H
3	* 2483.5	33.43	RMS	32.4	-16	.61	50.44	54	-3.56	-	-	279	110	H
4	* 2483.55	34.18	RMS	32.4	-16	.61	51.19	54	-2.81	-	-	279	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

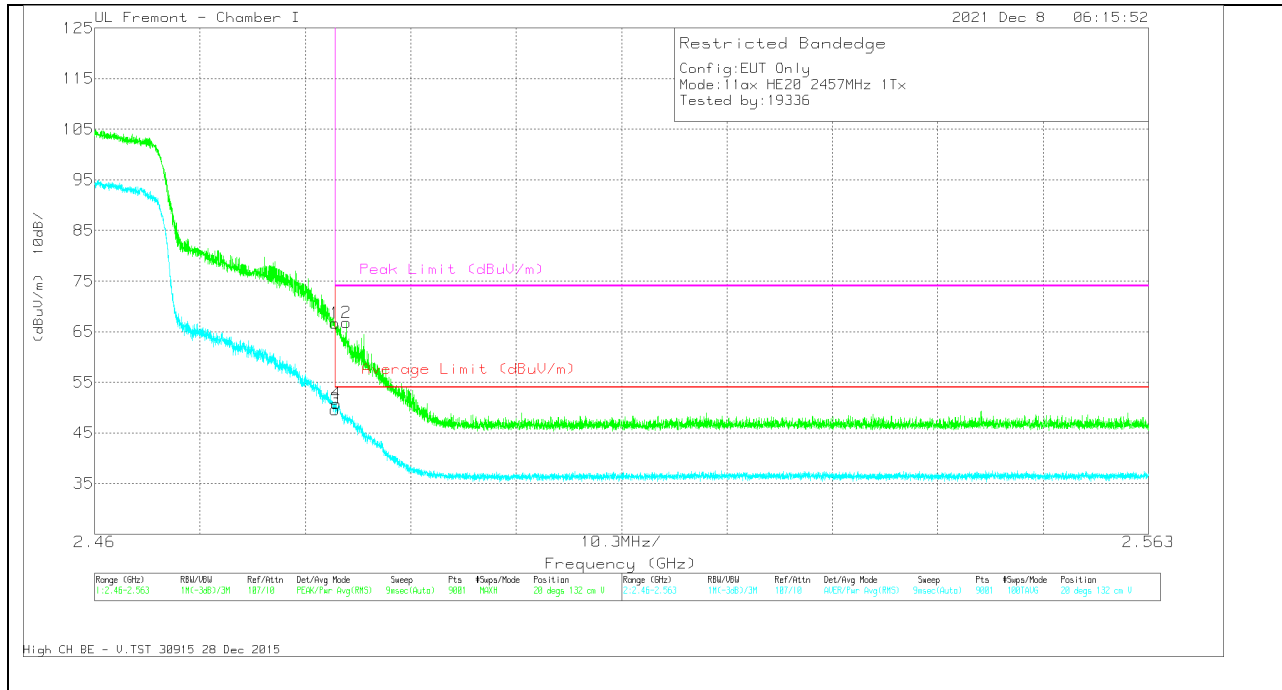


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.82	Pk	32.1	-19.2	0	66.72	-	-	74	-7.28	20	132	V
2	* 2.48459	53.88	Pk	32.1	-19.2	0	66.78	-	-	74	-7.22	20	132	V
3	* 2.4835	36.15	RMS	32.1	-19.2	.61	49.66	54	-4.34	-	-	20	132	V
4	* 2.48363	37.29	RMS	32.1	-19.2	.61	50.80	54	-3.20	-	-	20	132	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

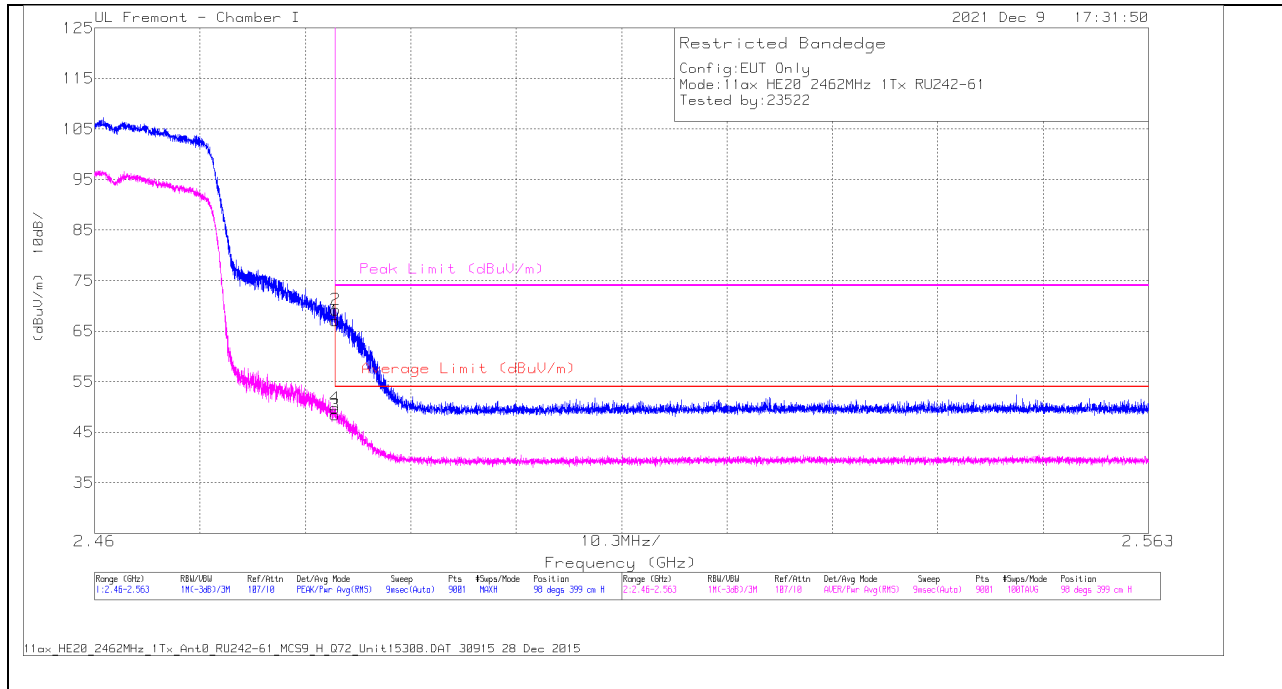

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.21	Pk	32.1	-19.2	0	67.11	-	-	74	-6.89	98	399	H
2	* 2.48355	56.33	Pk	32.1	-19.2	0	69.23	-	-	74	-4.77	98	399	H
3	* 2.4835	34.93	RMS	32.1	-19.2	.61	48.44	54	-5.56	-	-	98	399	H
4	* 2.48352	36.31	RMS	32.1	-19.2	.61	49.82	54	-4.18	-	-	98	399	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

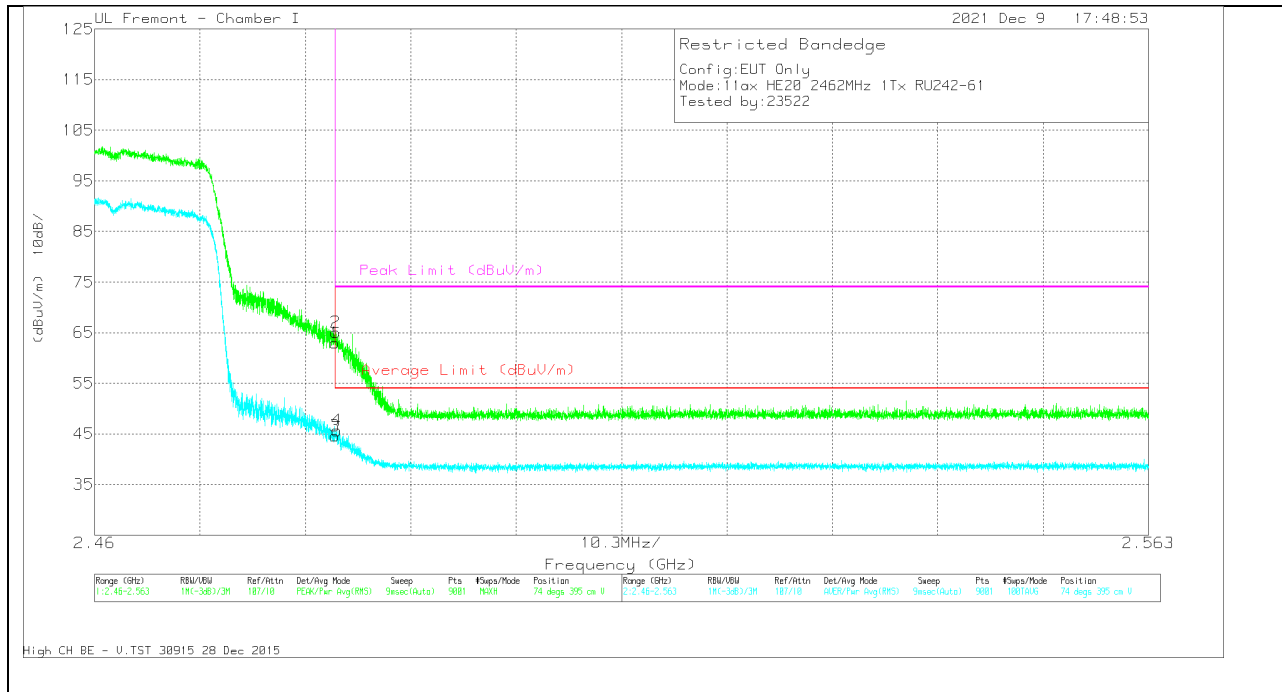


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	50.09	Pk	32.1	-19.2	0	62.99	-	-	74	-11.01	74	395	V
2	* 2.48353	52.2	Pk	32.1	-19.2	0	65.1	-	-	74	-8.9	74	395	V
3	* 2.4835	31.03	RMS	32.1	-19.2	.61	44.54	54	-9.46	-	-	74	395	V
4	* 2.48368	32.13	RMS	32.1	-19.2	.61	45.64	54	-8.36	-	-	74	395	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

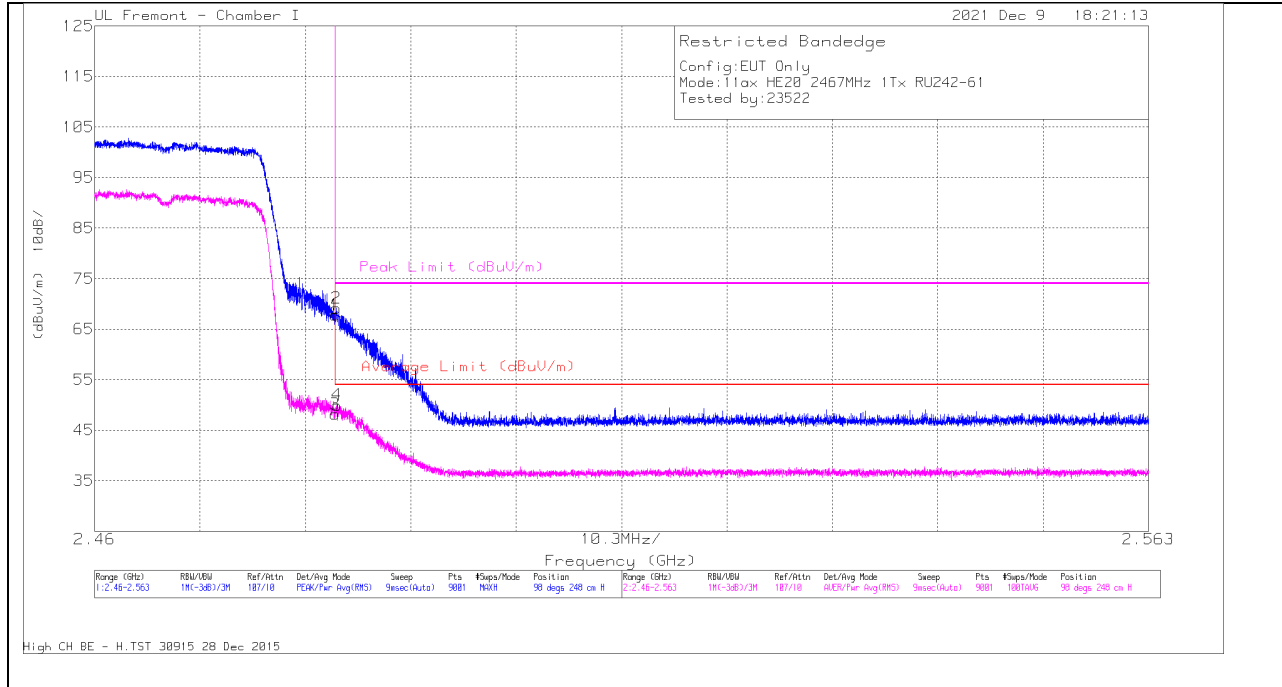

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.91	Pk	32.1	-19.2	0	67.81	-	-	74	-6.19	98	248	H
2	* 2.48364	56.25	Pk	32.1	-19.2	0	69.15	-	-	74	-4.85	98	248	H
3	* 2.4835	34.63	RMS	32.1	-19.2	.61	48.14	54	-5.86	-	-	98	248	H
4	* 2.48367	36.47	RMS	32.1	-19.2	.61	49.98	54	-4.02	-	-	98	248	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

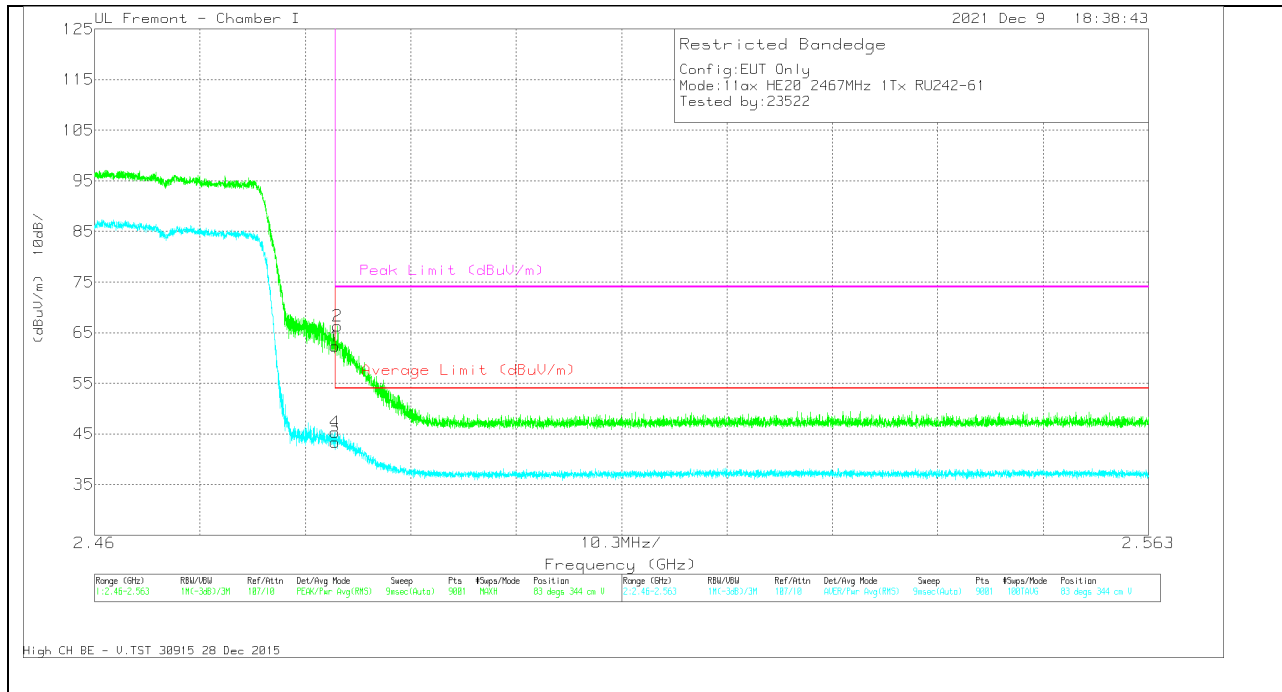


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	49.47	Pk	32.1	-19.2	0	62.37	-	-	74	-11.63	83	344	V
2	* 2.48372	53.43	Pk	32.1	-19.2	0	66.33	-	-	74	-7.67	83	344	V
3	* 2.4835	29.82	RMS	32.1	-19.2	.61	43.33	54	-10.67	-	-	83	344	V
4	* 2.48352	31.8	RMS	32.1	-19.2	.61	45.31	54	-8.69	-	-	83	344	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

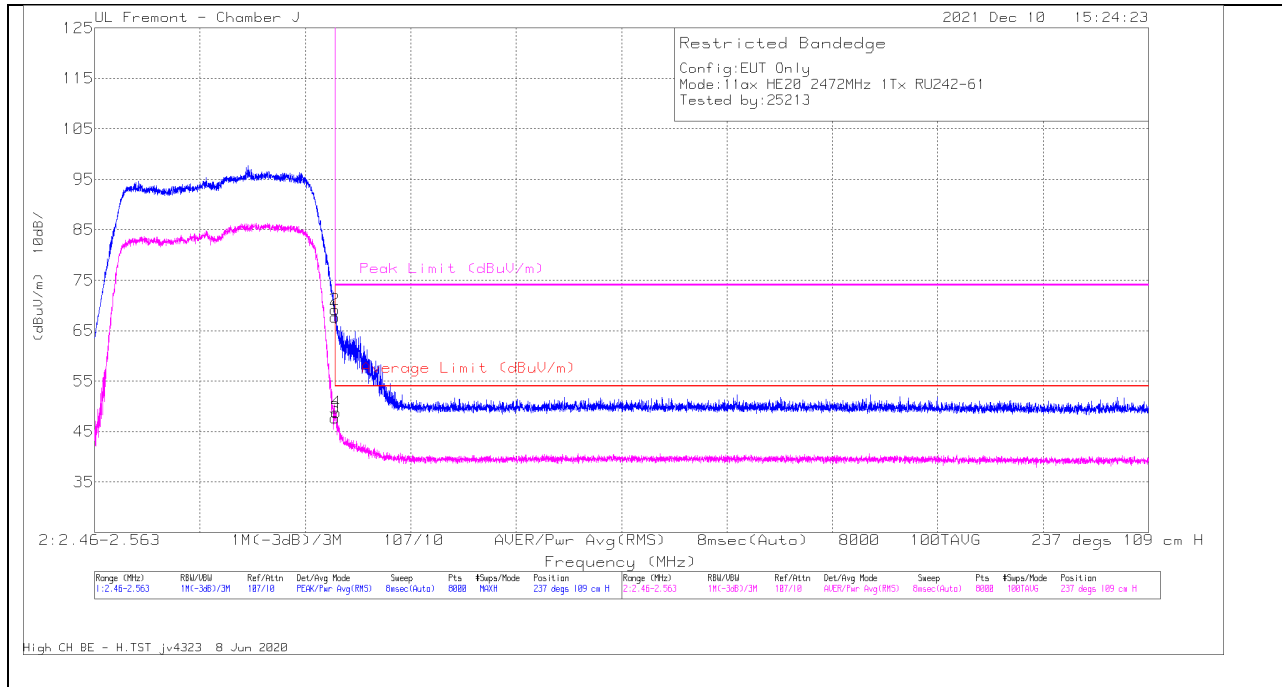


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	51.27	Pk	32.4	-16	0	67.67	-	-	74	-6.33	237	109	H
2	* 2483.51	52.76	Pk	32.4	-16	0	69.16	-	-	74	-4.84	237	109	H
3	* 2483.5	30.69	RMS	32.4	-16	.61	47.7	54	-6.3	-	-	237	109	H
4	* 2483.62	31.75	RMS	32.4	-16	.61	48.76	54	-5.24	-	-	237	109	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

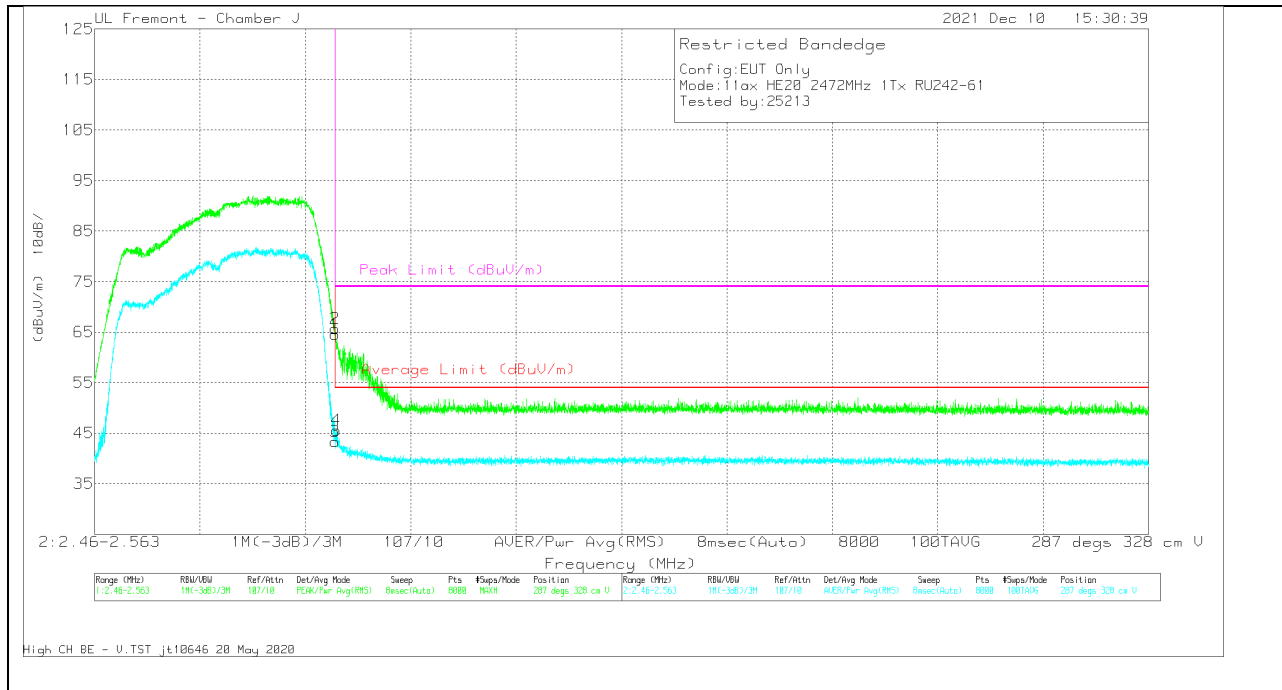

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	48.2	Pk	32.4	-16	0	64.6	-	-	74	-9.4	287	328	V
2	* 2483.51	49.26	Pk	32.4	-16	0	65.66	-	-	74	-8.34	287	328	V
3	* 2483.5	26.31	RMS	32.4	-16	.61	43.32	54	-10.68	-	-	287	328	V
4	* 2483.62	28.51	RMS	32.4	-16	.61	45.52	54	-8.48	-	-	287	328	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX ANT 2 MODE: SU

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

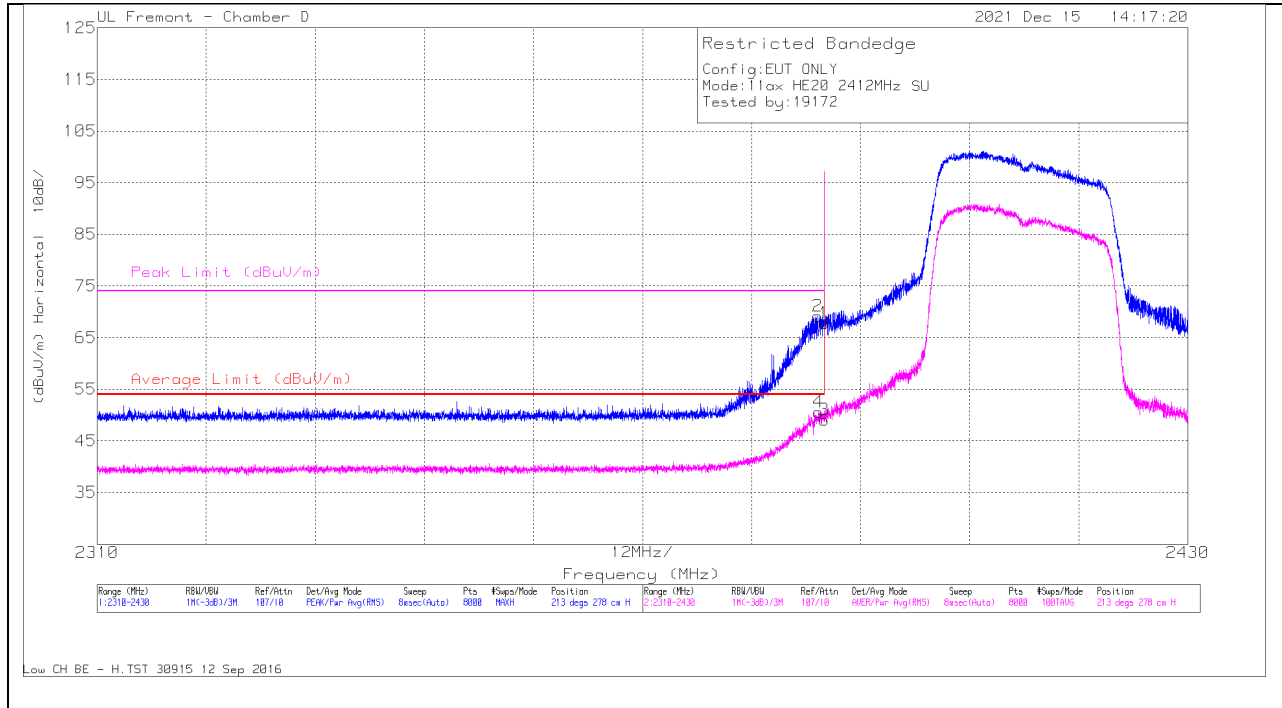

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	56.41	Pk	32.1	-20.7	0	67.81	-	-	74	-6.19	213	278	H
2	* 2389.256	57.74	Pk	32.1	-20.7	0	69.14	-	-	74	-4.86	213	278	H
3	* 2390	37.11	RMS	32.1	-20.7	.55	49.06	54	-4.94	-	-	213	278	H
4	* 2389.361	38.59	RMS	32.1	-20.7	.55	50.54	54	-3.46	-	-	213	278	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

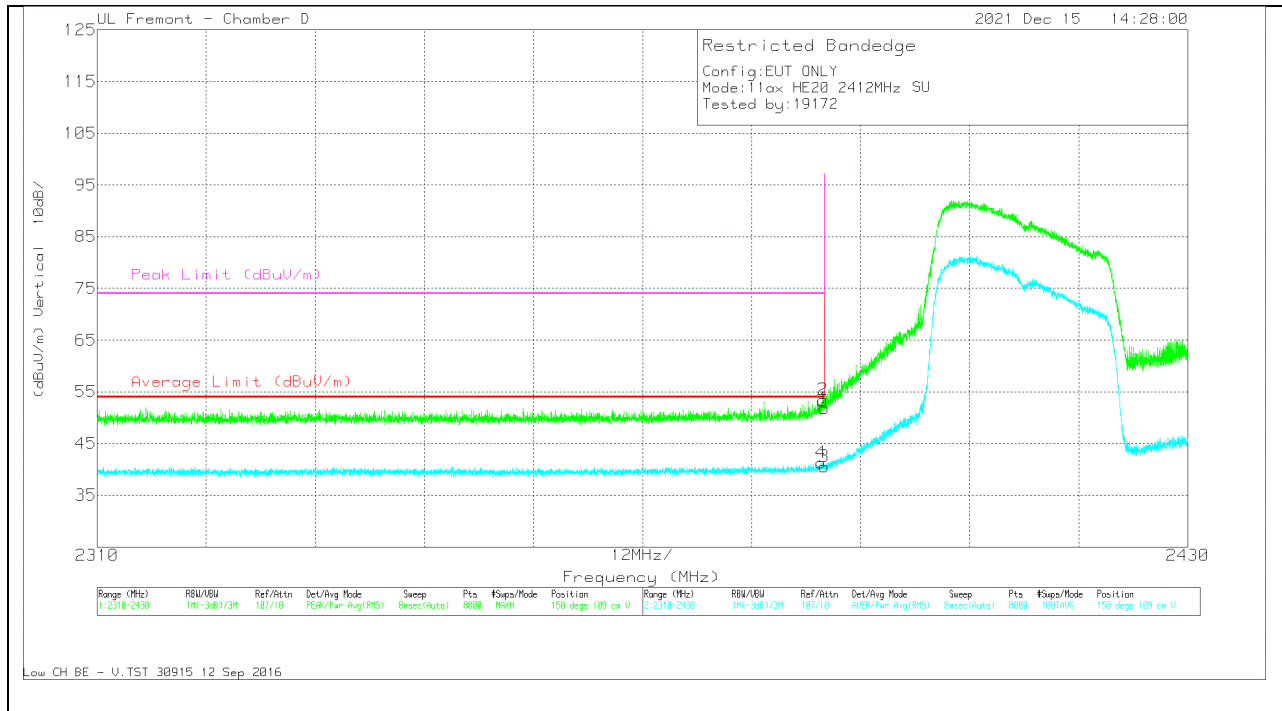


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	40.4	Pk	32.1	-20.7	0	51.8	-	-	74	-22.2	150	109	V
2	* 2389.9	41.99	Pk	32.1	-20.7	0	53.39	-	-	74	-20.61	150	109	V
3	* 2390	28.52	RMS	32.1	-20.7	.55	40.47	54	-13.53	-	-	150	109	V
4	* 2389.7	29.27	RMS	32.1	-20.7	.55	41.22	54	-12.78	-	-	150	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

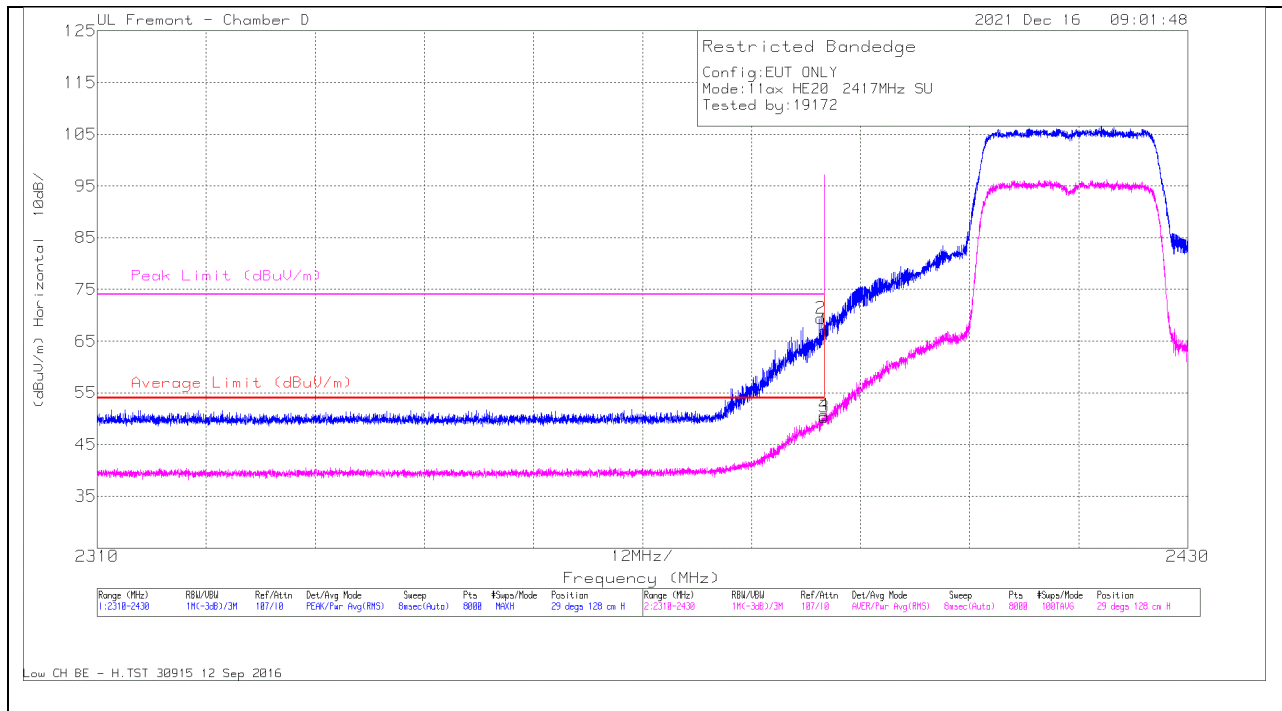


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2389.7	58.03	Pk	32.1	-20.7	0	69.43	-	-	74	-4.57	29	128	H
4	* 2389.99	38.8	RMS	32.1	-20.7	.55	50.75	54	-3.25	-	-	29	128	H
1	* 2390	55.56	Pk	32.1	-20.7	0	66.96	-	-	74	-7.04	29	128	H
3	* 2390	38.35	RMS	32.1	-20.7	.55	50.31	54	-3.69	-	-	29	128	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

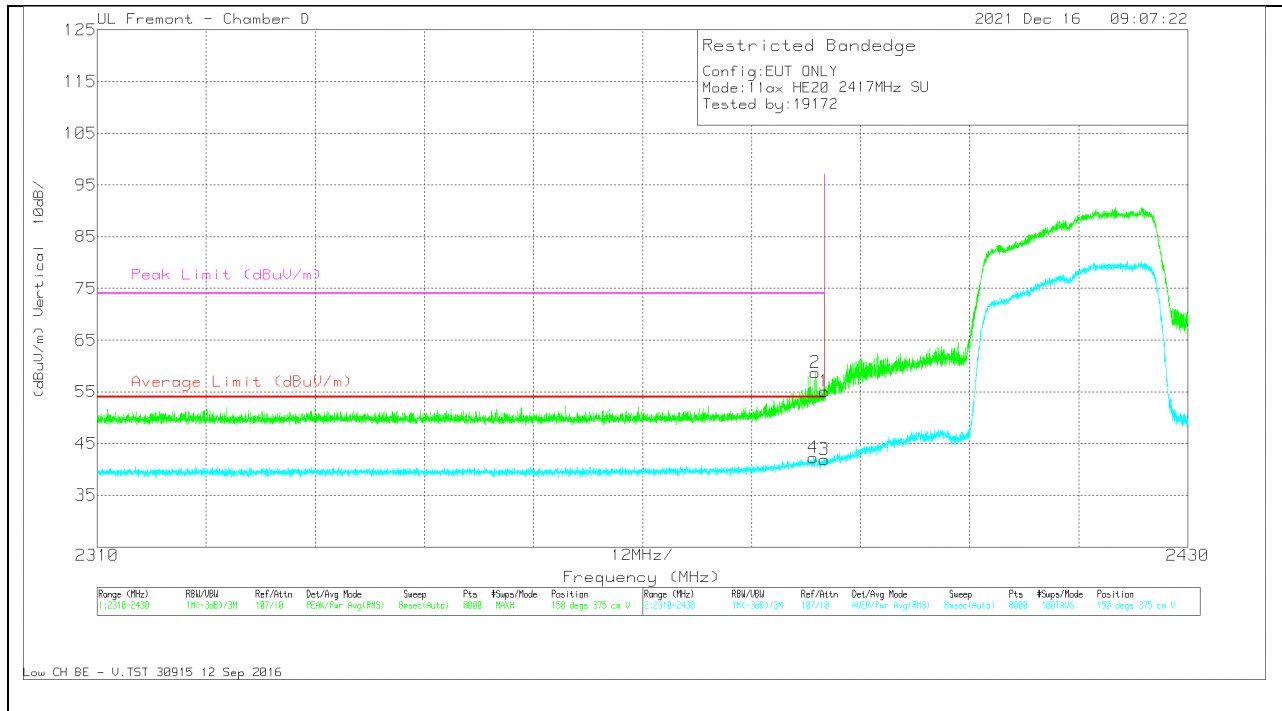


Marker	Frequen cy (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	43.74	Pk	32.1	-20.7	0	55.14	-	-	74	-18.86	150	375	V
2	* 2388.97	47.34	Pk	32.1	-20.7	0	58.74	-	-	74	-15.26	150	375	V
3	* 2390	29.95	RMS	32.1	-20.7	.55	41.90	54	-12.10	-	-	150	375	V
4	* 2388.78	30.33	RMS	32.1	-20.7	.55	42.28	54	-11.72	-	-	150	375	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

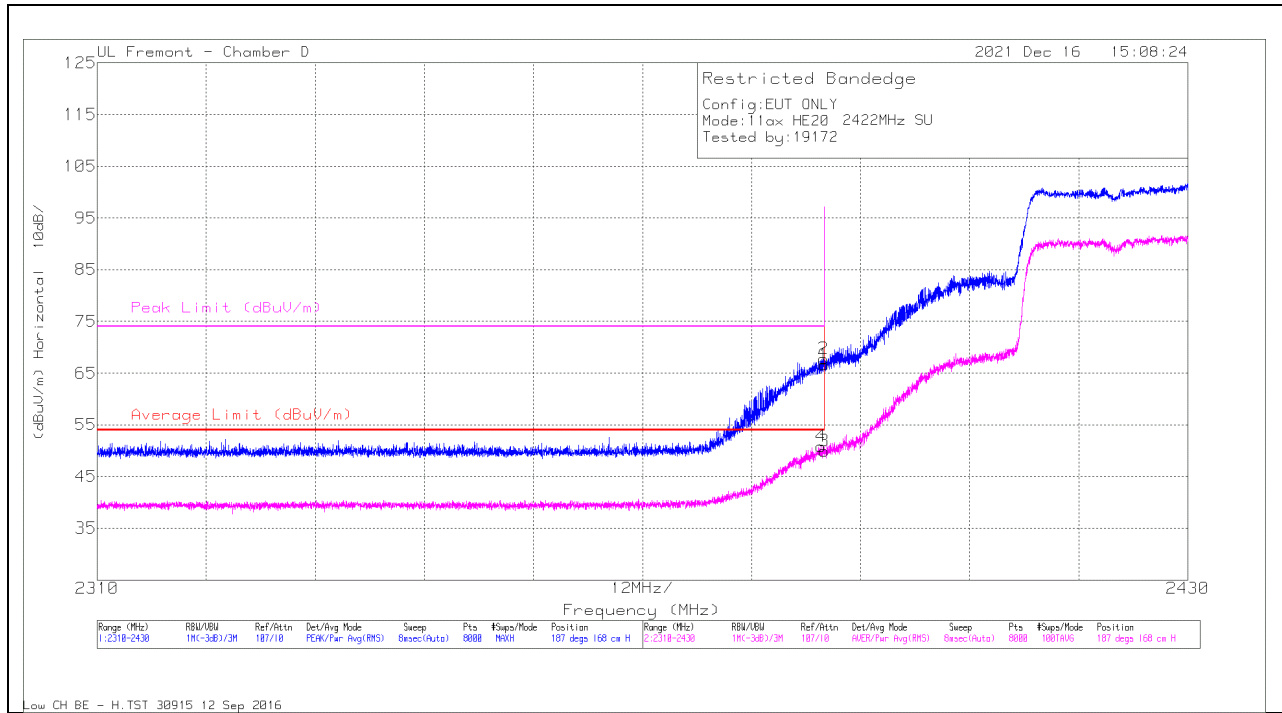

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	55.2	Pk	32.1	-20.7	0	66.6	-	-	74	-7.4	187	168	H
2	* 2389.90	56.31	Pk	32.1	-20.7	0	67.71	-	-	74	-6.29	187	168	H
3	* 2390	38.04	RMS	32.1	-20.7	.55	49.99	54	-4.01	-	-	187	168	H
4	* 2389.62	38.92	RMS	32.1	-20.7	.55	50.87	54	-3.13	-	-	187	168	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

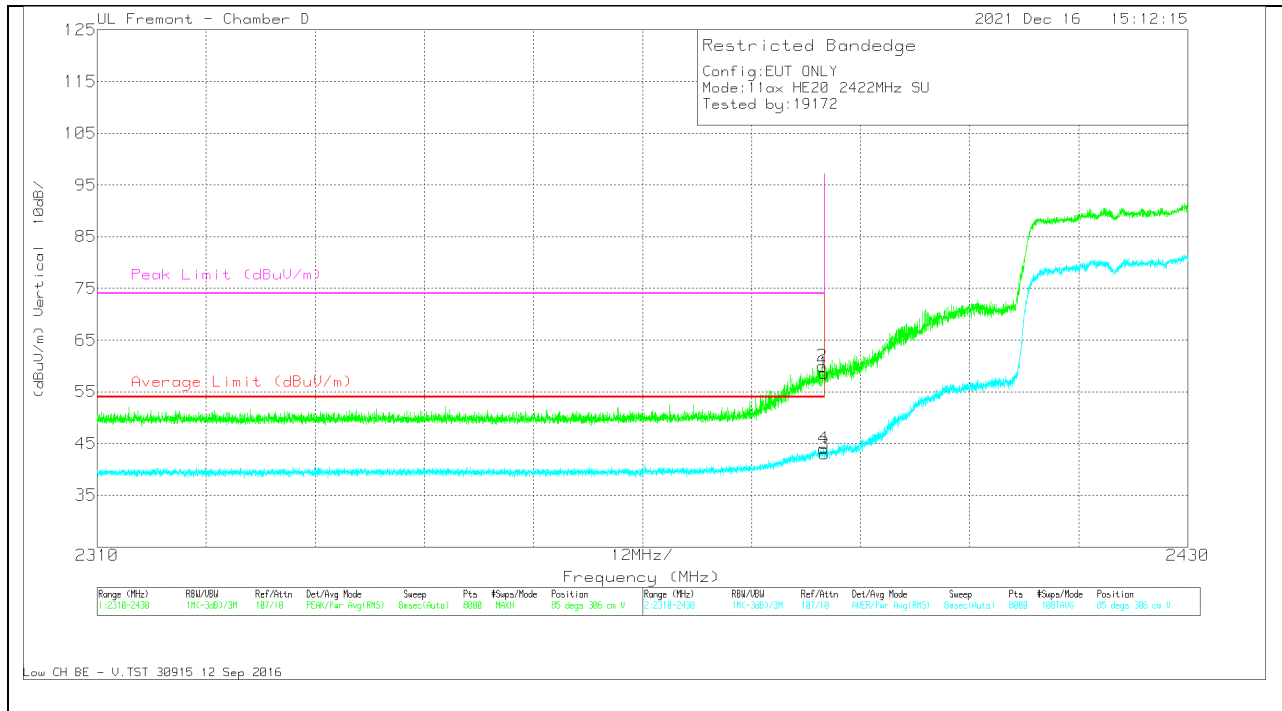


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	47.18	Pk	32.1	-20.7	0	58.58	-	-	74	-15.42	85	306	V
2	* 2389.78	48.57	Pk	32.1	-20.7	0	59.97	-	-	74	-14.03	85	306	V
3	* 2390	31.05	RMS	32.1	-20.7	.55	43.00	54	-11.00	-	-	85	306	V
4	* 2389.90	32.04	RMS	32.1	-20.7	.55	43.99	54	-10.01	-	-	85	306	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

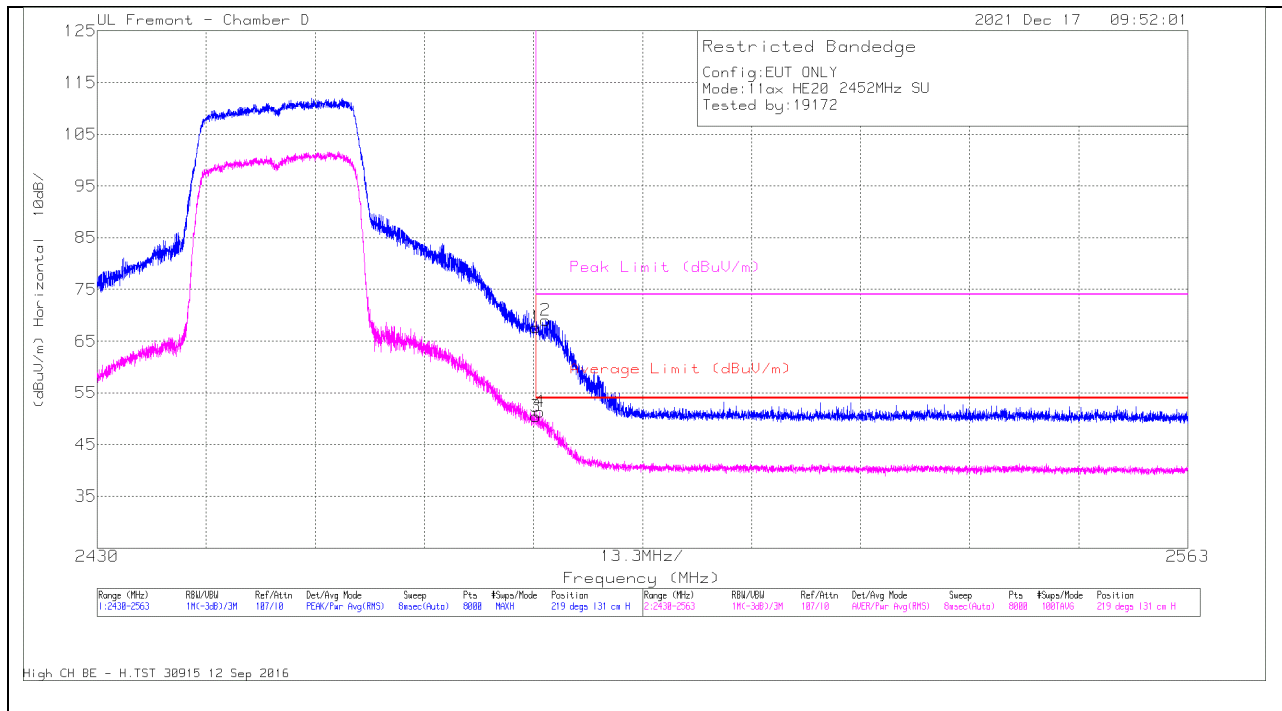

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	55.7	Pk	32.7	-20.7	0	67.7	-	-	74	-6.3	219	131	H
2	* 2484.70	57.04	Pk	32.7	-20.7	0	69.04	-	-	74	-4.96	219	131	H
3	* 2483.5	37.89	RMS	32.7	-20.7	.55	50.44	54	-3.56	-	-	219	131	H
4	* 2483.97	38.75	RMS	32.7	-20.7	.55	51.31	54	-2.69	-	-	219	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

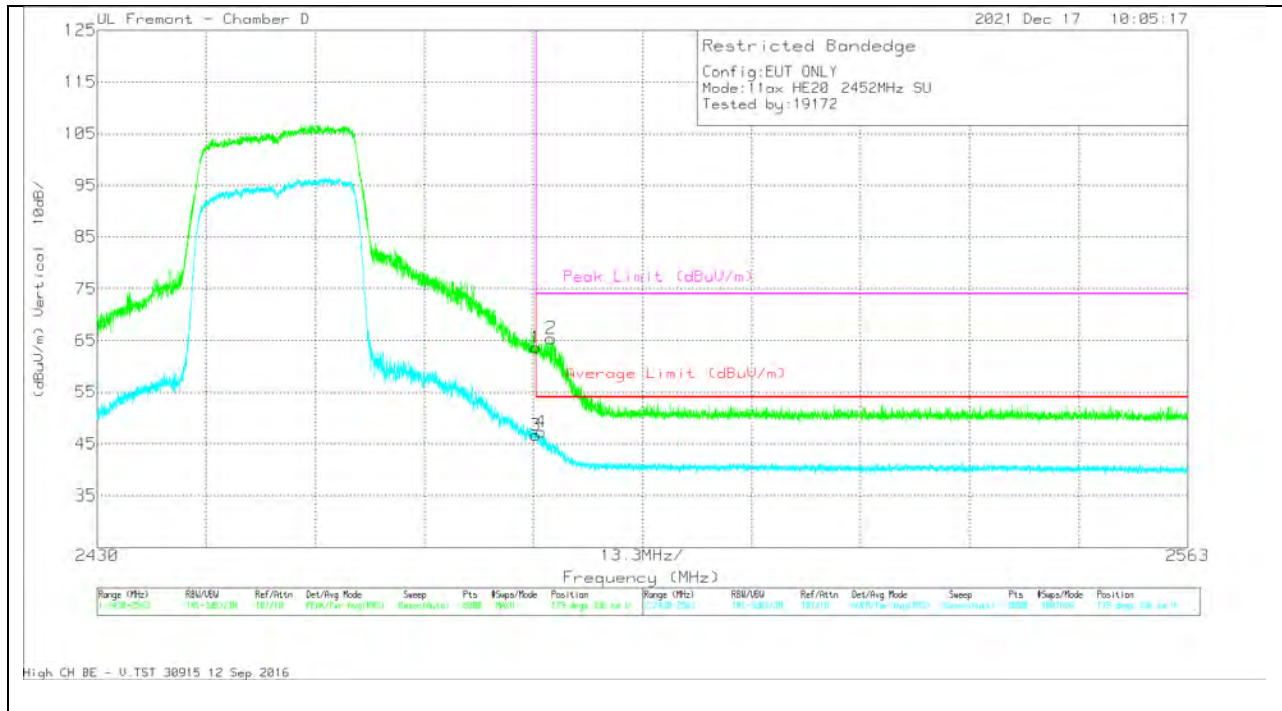


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	51.66	Pk	32.7	-20.7	0	63.66	-	-	74	-10.34	179	336	V
2	* 2485.35	53.35	Pk	32.7	-20.7	0	65.35	-	-	74	-8.65	179	336	V
3	* 2483.5	34.15	RMS	32.7	-20.7	.55	46.70	54	-7.30	-	-	179	336	V
4	* 2484.10	34.77	RMS	32.7	-20.7	.55	47.32	54	-6.68	-	-	179	336	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

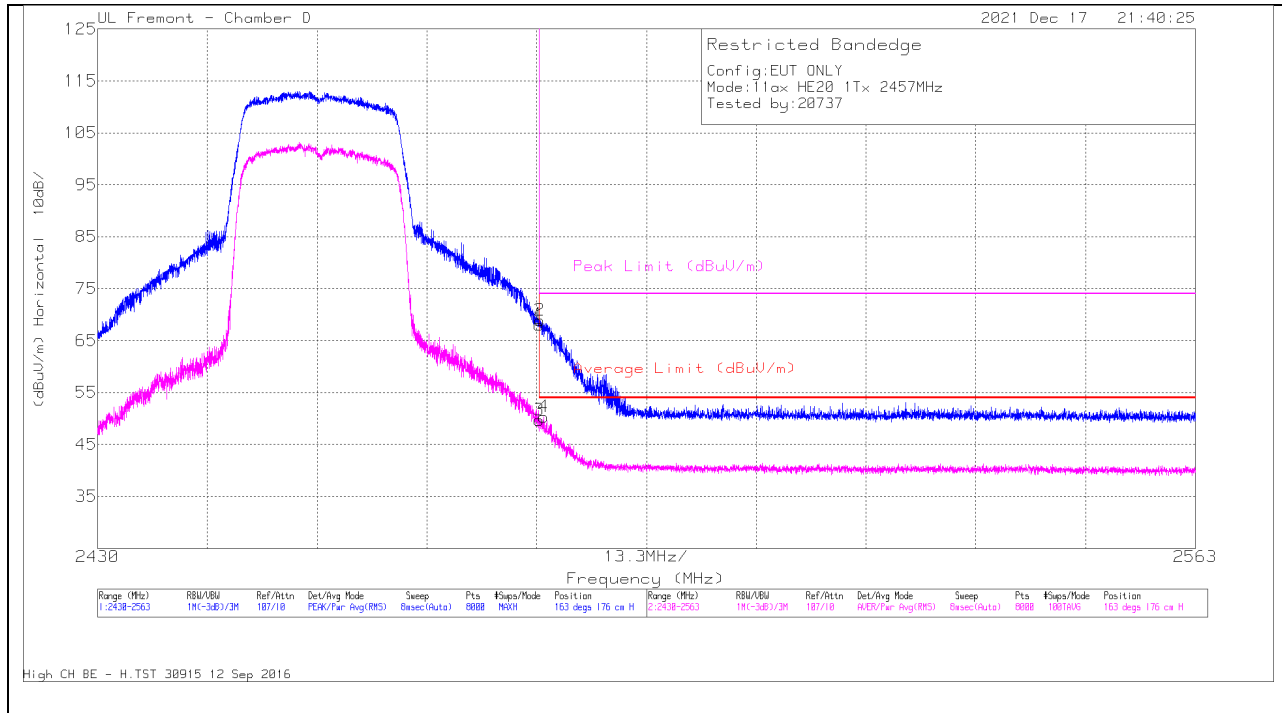

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	56.08	Pk	32.7	-20.7	0	68.08	-	-	74	-5.92	163	176	H
2	* 2483.61	56.84	Pk	32.7	-20.7	0	68.84	-	-	74	-5.16	163	176	H
3	* 2483.5	37.11	RMS	32.7	-20.7	.55	49.66	54	-4.34	-	-	163	176	H
4	* 2484.07	37.77	RMS	32.7	-20.7	.55	50.32	54	-3.68	-	-	163	176	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

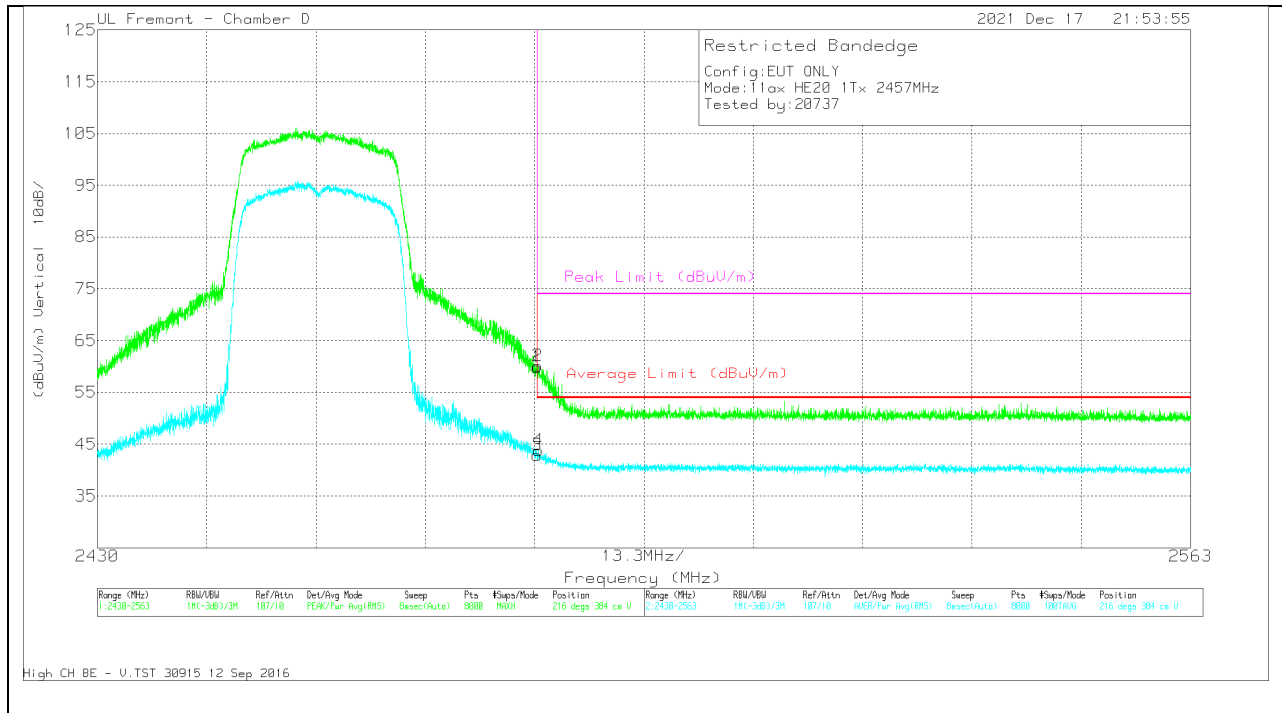


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	47.81	Pk	32.7	-20.7	0	59.81	-	-	74	-14.19	216	384	V
2	* 2483.57	48.1	Pk	32.7	-20.7	0	60.1	-	-	74	-13.9	216	384	V
3	* 2483.5	30.36	RMS	32.7	-20.7	.55	42.91	54	-11.09	-	-	216	384	V
4	* 2483.64	31.29	RMS	32.7	-20.7	.55	43.84	54	-10.16	-	-	216	384	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

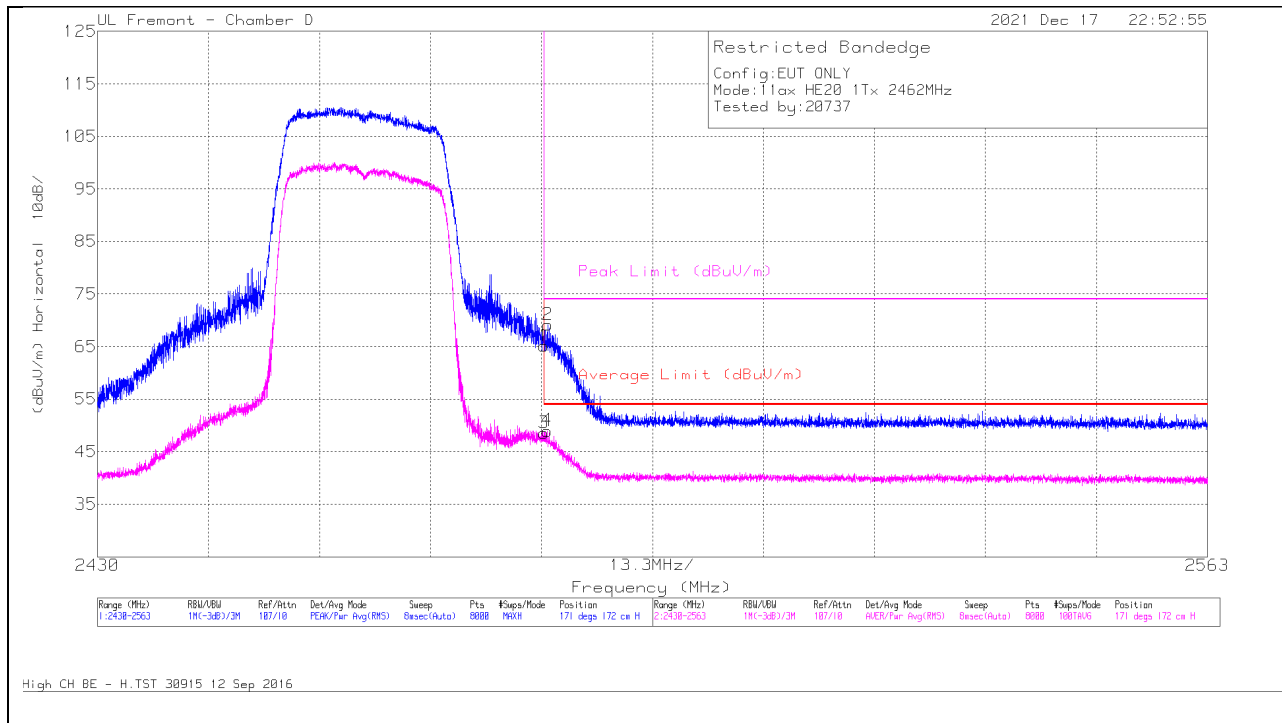


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	53.07	Pk	32.7	-20.7	0	65.07	-	-	74	-8.93	171	172	H
2	* 2483.94	57.15	Pk	32.7	-20.7	0	69.15	-	-	74	-4.85	171	172	H
3	* 2483.5	35.97	RMS	32.7	-20.7	.55	48.52	54	-5.48	-	-	171	172	H
4	* 2483.89	36.45	RMS	32.7	-20.7	.55	49.00	54	-5.00	-	-	171	172	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

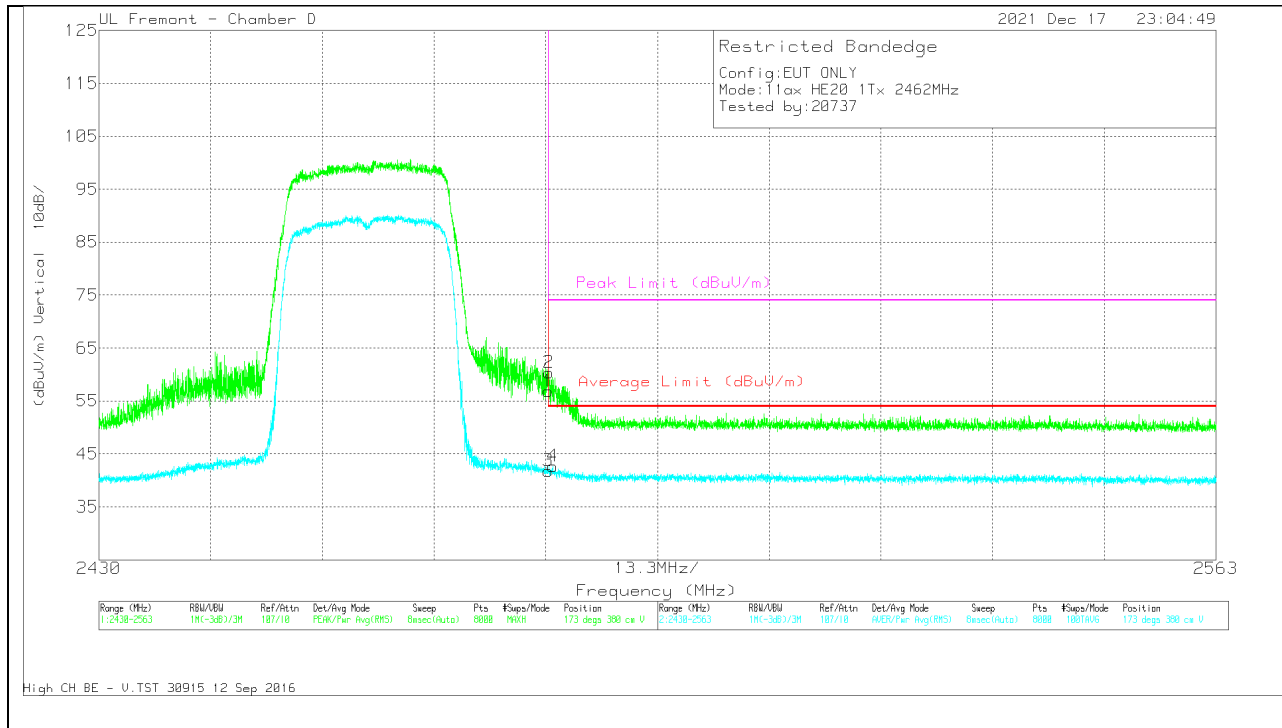


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	44.88	Pk	32.7	-20.7	0	56.88	-	-	74	-17.12	173	380	V
3	* 2483.5	29.23	RMS	32.7	-20.7	.55	41.78	54	-12.22	-	-	173	380	V
2	* 2483.556	48.38	Pk	32.7	-20.7	0	60.38	-	-	74	-13.62	173	380	V
4	* 2484.054	30.14	RMS	32.7	-20.7	.55	42.69	54	-11.31	-	-	173	380	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

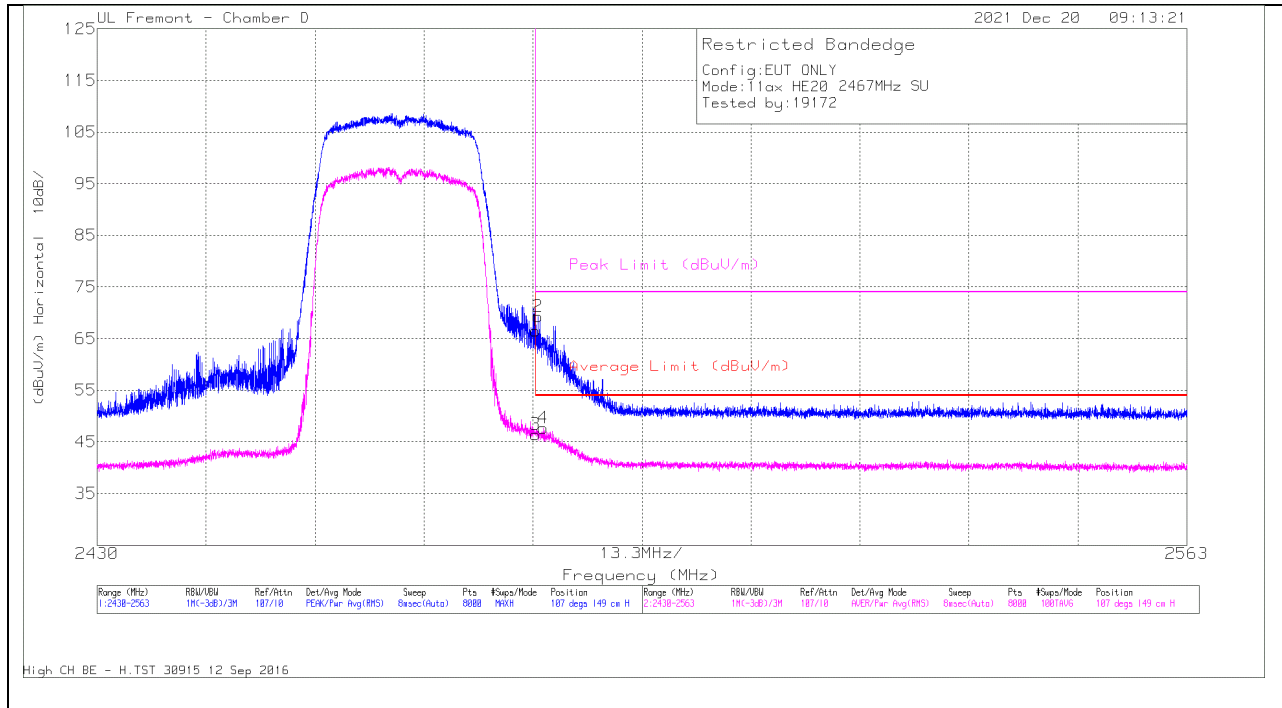

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	54.53	Pk	32.7	-20.7	0	66.53	-	-	74	-7.47	107	149	H
2	* 2483.82	57.25	Pk	32.7	-20.7	0	69.25	-	-	74	-4.75	107	149	H
3	* 2483.5	33.9	RMS	32.7	-20.7	.55	46.45	54	-7.55	-	-	107	149	H
4	* 2484.47	35.13	RMS	32.7	-20.7	.55	47.68	54	-6.32	-	-	107	149	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

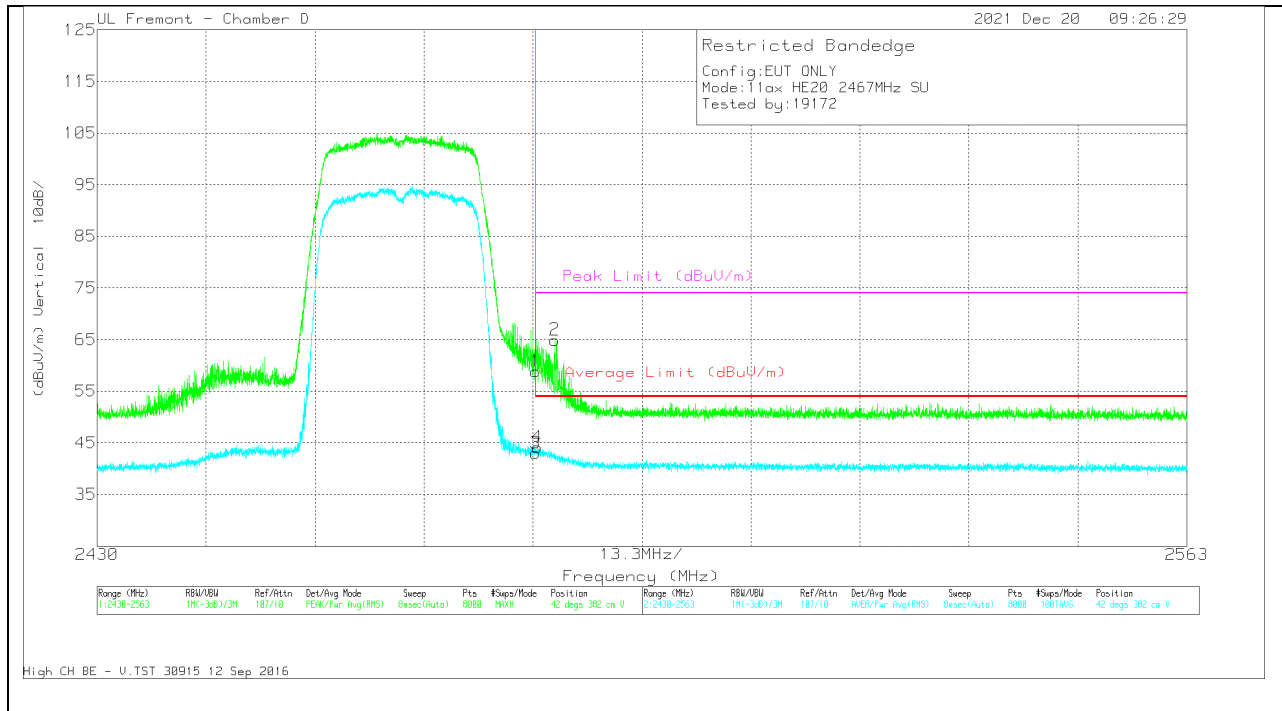


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	46.81	Pk	32.7	-20.7	0	58.81	-	-	74	-15.19	42	382	V
2	* 2485.85	52.94	Pk	32.7	-20.7	0	64.94	-	-	74	-9.06	42	382	V
3	* 2483.5	30.53	RMS	32.7	-20.7	.55	43.08	54	-10.92	-	-	42	382	V
4	* 2483.72	31.64	RMS	32.7	-20.7	.55	44.19	54	-9.81	-	-	42	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

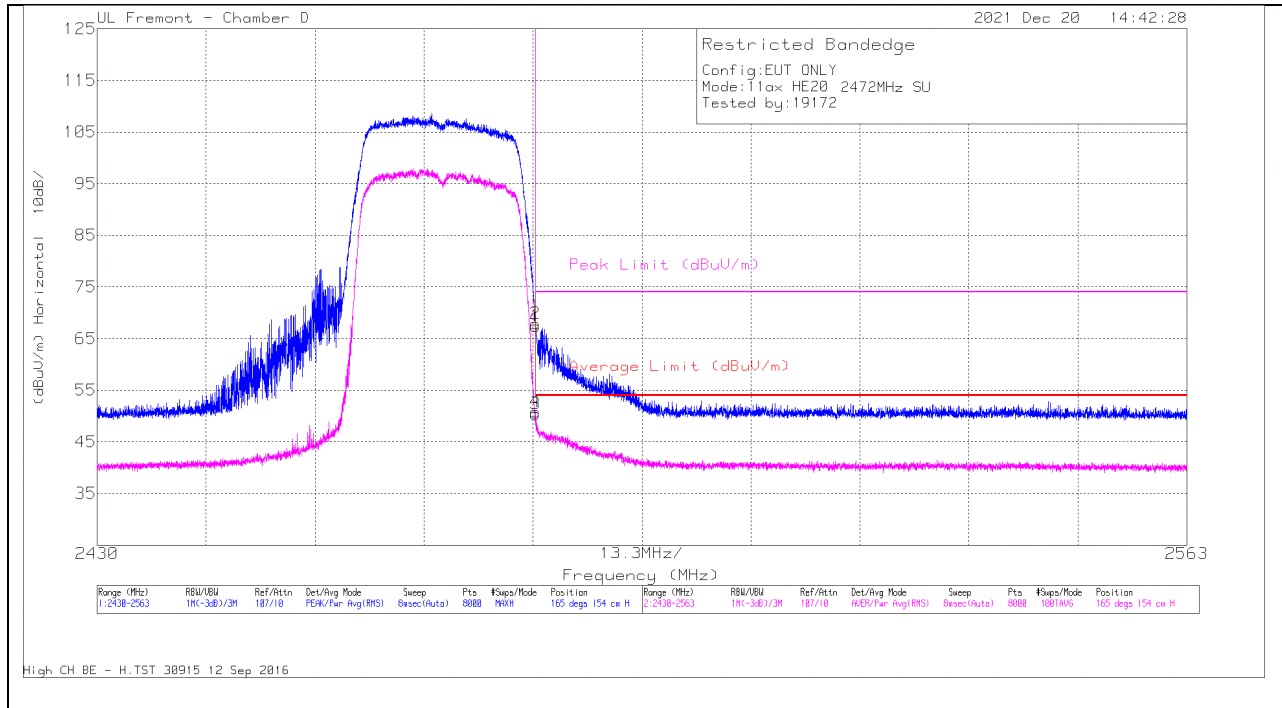

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb I/Fitr/Par d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2483.5	55.34	Pk	32.7	-20.7	0	67.34	-	-	74	-6.66	165	154	H
2	*2483.52	55.91	Pk	32.7	-20.7	0	67.91	-	-	74	-6.09	165	154	H
3	*2483.5	37.9	RMS	32.7	-20.7	.55	50.45	54	-3.55	-	-	165	154	H
4	*2483.51	38.32	RMS	32.7	-20.7	.55	50.87	54	-3.13	-	-	165	154	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

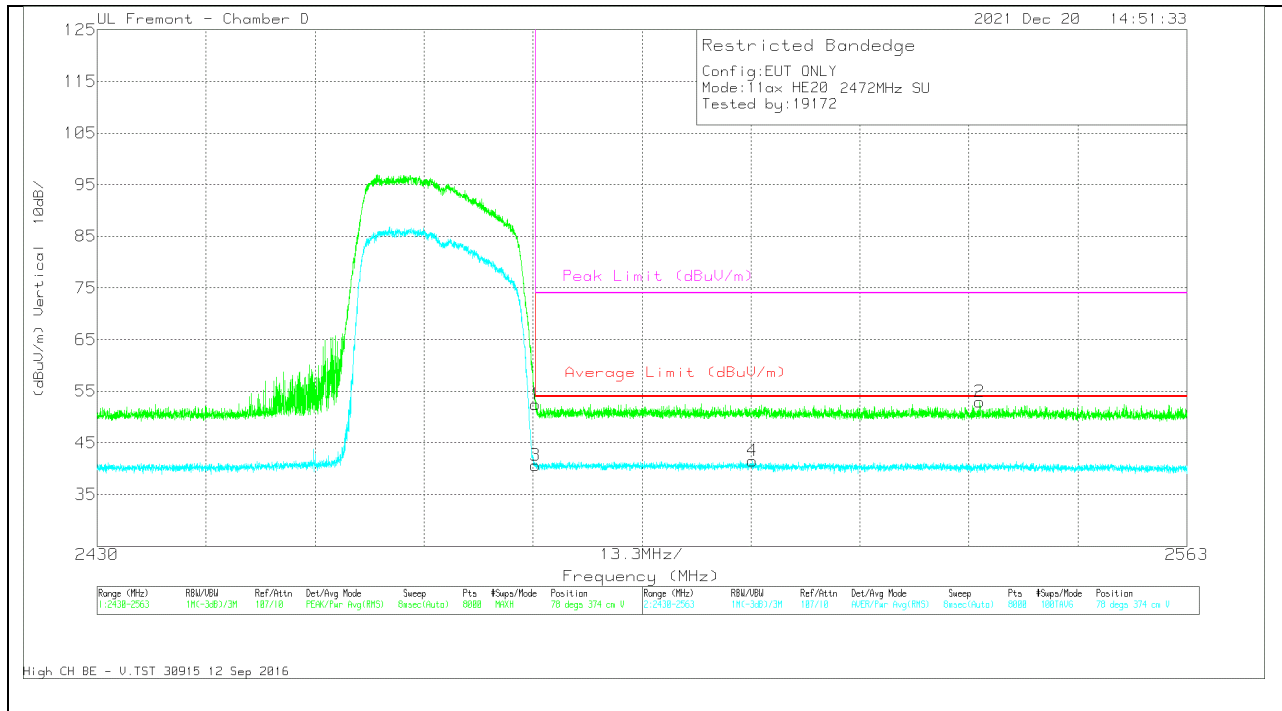

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb I/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	40.41	Pk	32.7	-20.7	0	52.41	-	-	74	-21.59	78	374	V
3	* 2483.5	28.06	RMS	32.7	-20.7	.55	40.61	54	-13.39	-	-	78	374	V
4	2509.96	28.92	RMS	32.7	-20.6	.55	41.57	54	-12.43	-	-	78	374	V
2	2537.74	41.08	Pk	32.4	-20.5	0	52.98	-	-	74	-21.02	78	374	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX ANT 3 MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

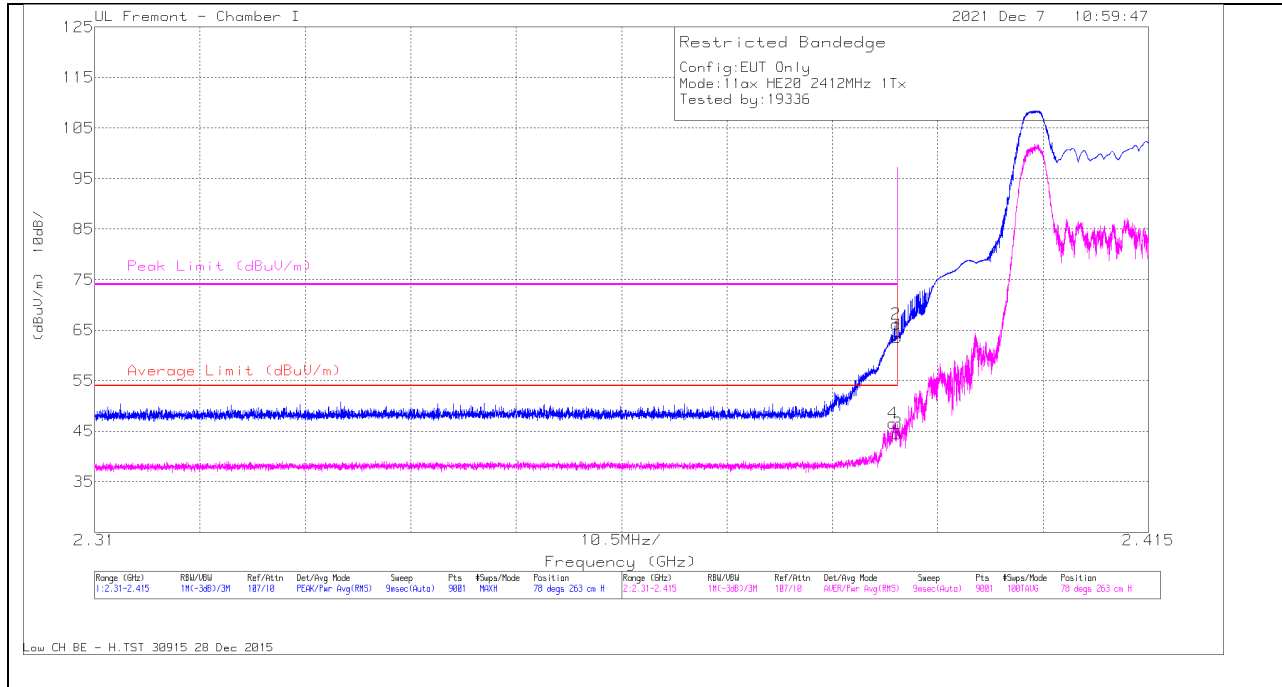

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	50.46	Pk	31.9	-18.8	0	63.56	-	-	74	-10.44	78	263	H
2	* 2.38984	53.11	Pk	31.9	-18.8	0	66.21	-	-	74	-7.79	78	263	H
3	* 2.39	30.91	RMS	31.9	-18.8	.61	44.62	54	-9.38	-	-	78	263	H
4	* 2.38956	33	RMS	31.9	-18.8	.61	46.71	54	-7.29	-	-	78	263	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

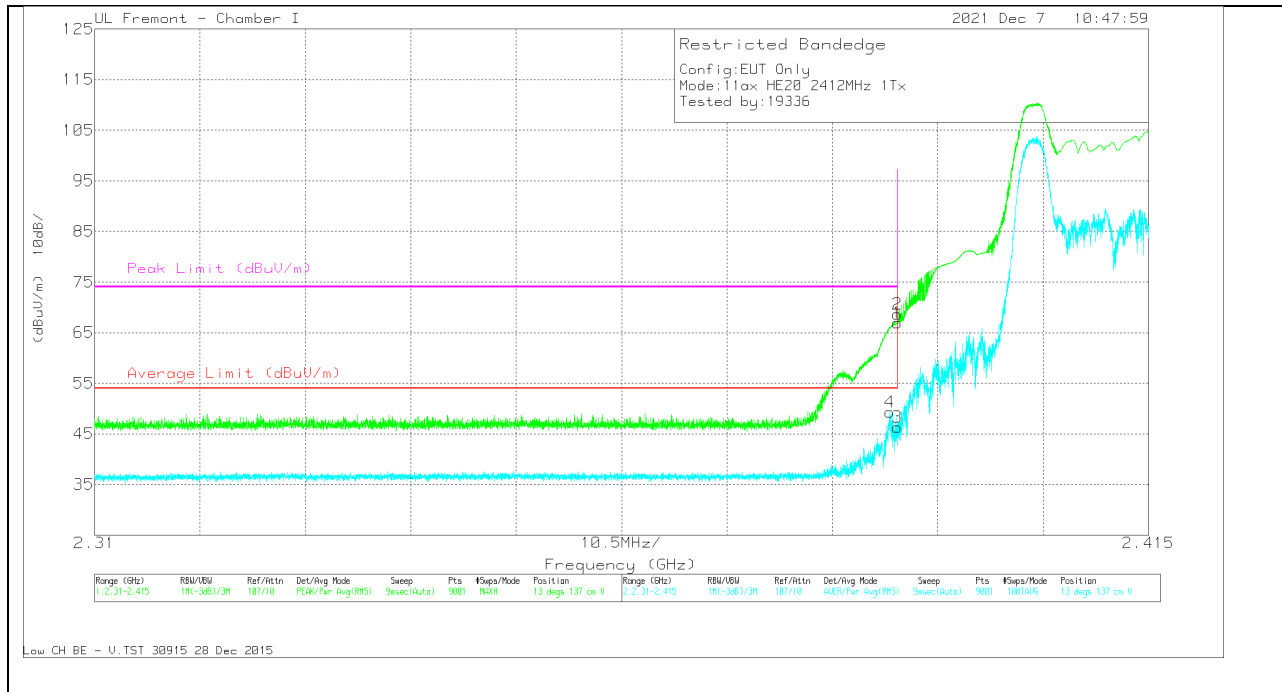


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.88	Pk	31.9	-18.8	0	66.98	-	-	74	-7.02	13	137	V
2	* 2.38998	55.58	Pk	31.9	-18.8	0	68.68	-	-	74	-5.32	13	137	V
3	* 2.39	32.74	RMS	31.9	-18.8	.61	46.45	54	-7.55	-	-	13	137	V
4	* 2.3892	35.71	RMS	31.9	-18.8	.61	49.42	54	-4.58	-	-	13	137	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

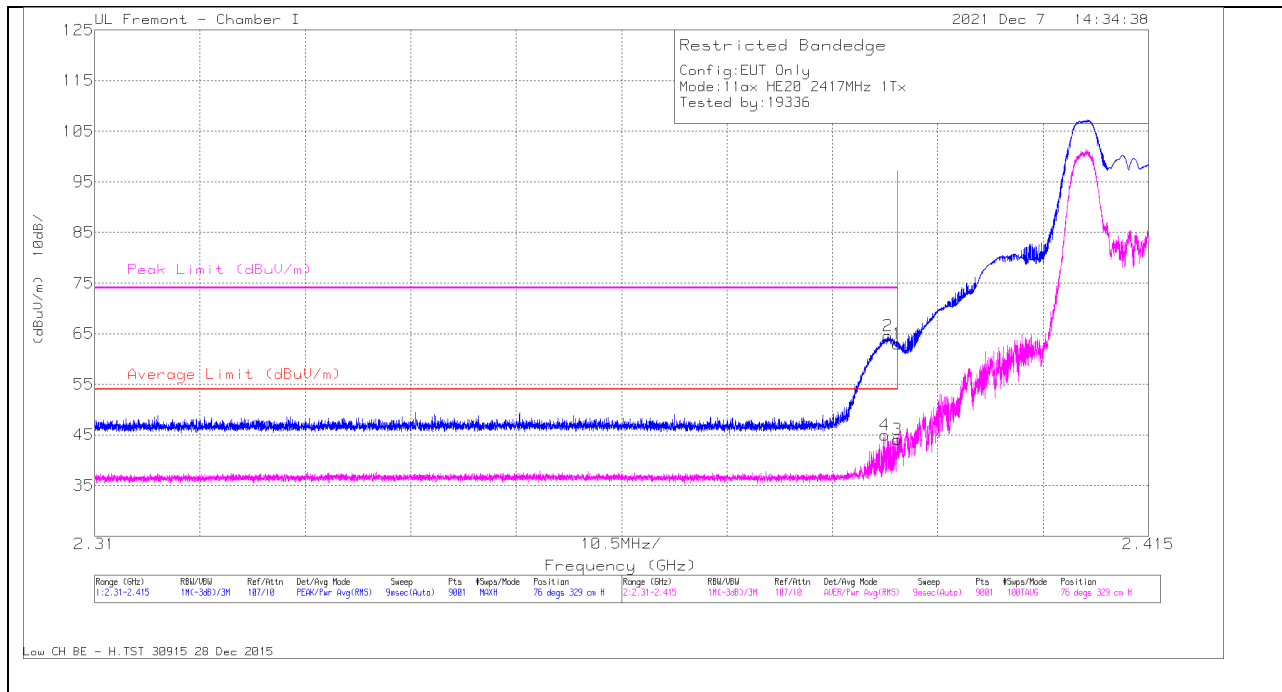


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb I/Filtr/Pa d (dB)	DC Corr (dB)	Correct ed Reading (dBuV/ m)	Average Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.86	Pk	31.9	-18.8	0	62.96	-	-	74	-11.04	76	329	H
2	* 2.3890	51.43	Pk	31.9	-18.8	0	64.53	-	-	74	-9.47	76	329	H
3	* 2.39	30.49	RMS	31.9	-18.8	.61	44.2	54	-9.8	-	-	76	329	H
4	* 2.3887	31.34	RMS	31.9	-18.8	.61	45.05	54	-8.95	-	-	76	329	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

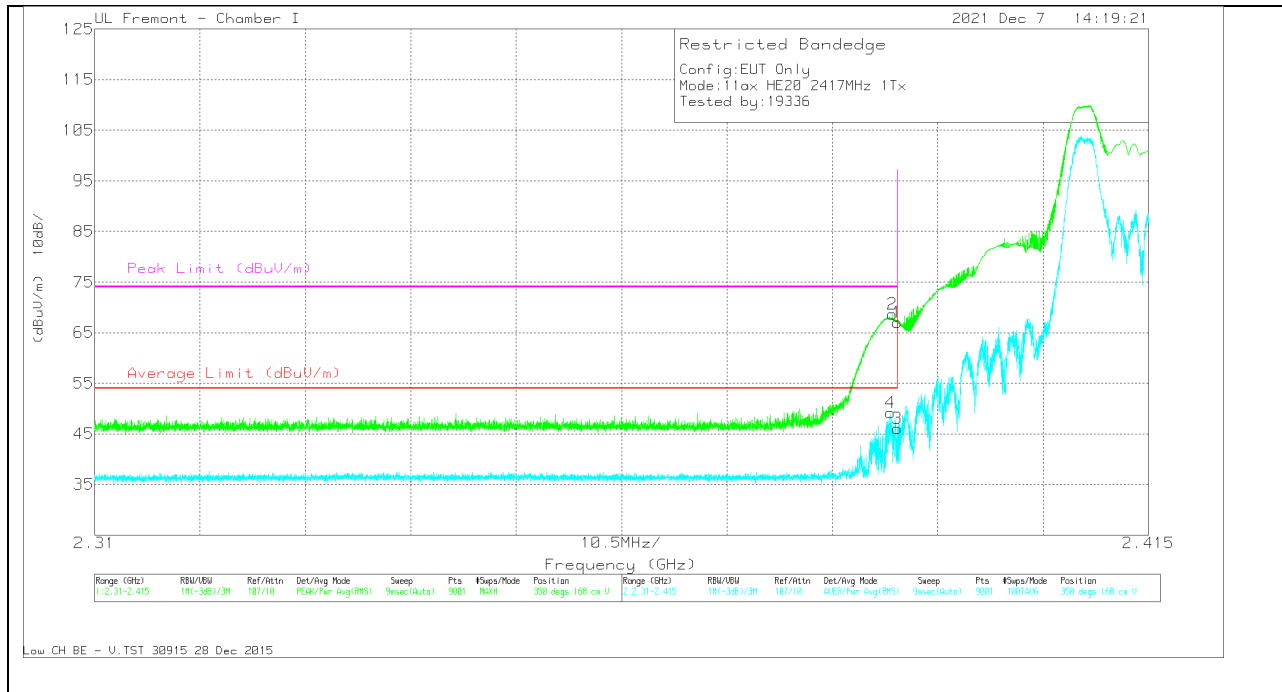

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.94	Pk	31.9	-18.8	0	67.04	-	-	74	-6.96	350	168	V
2	* 2.3895	55.62	Pk	31.9	-18.8	0	68.72	-	-	74	-5.28	350	168	V
3	* 2.39	32.5	RMS	31.9	-18.8	.61	46.21	54	-7.79	-	-	350	168	V
4	* 2.3893	35.56	RMS	31.9	-18.8	.61	49.27	54	-4.73	-	-	350	168	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

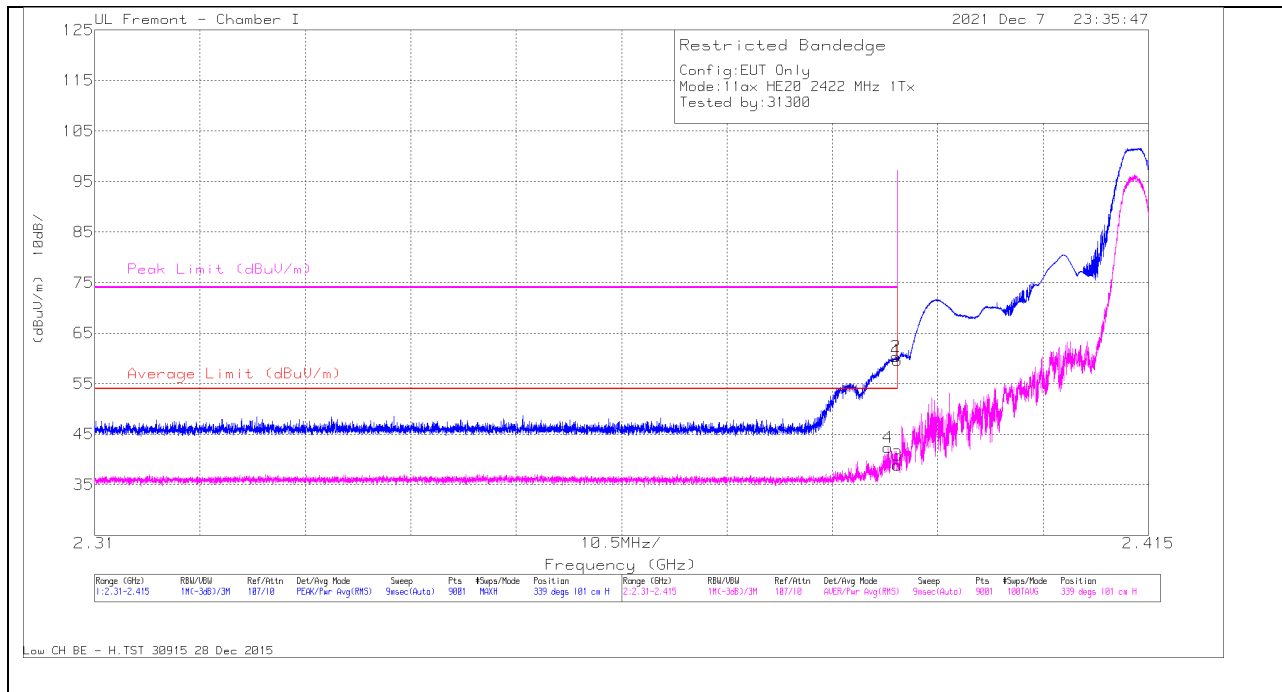

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	46.54	Pk	31.9	-18.8	0	59.64	-	-	74	-14.36	339	101	H
2	* 2.3898	47.27	Pk	31.9	-18.8	0	60.37	-	-	74	-13.63	339	101	H
3	* 2.39	25.23	RMS	31.9	-18.8	.61	38.94	54	-15.06	-	-	339	101	H
4	* 2.3890	28.71	RMS	31.9	-18.8	.61	42.42	54	-11.58	-	-	339	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

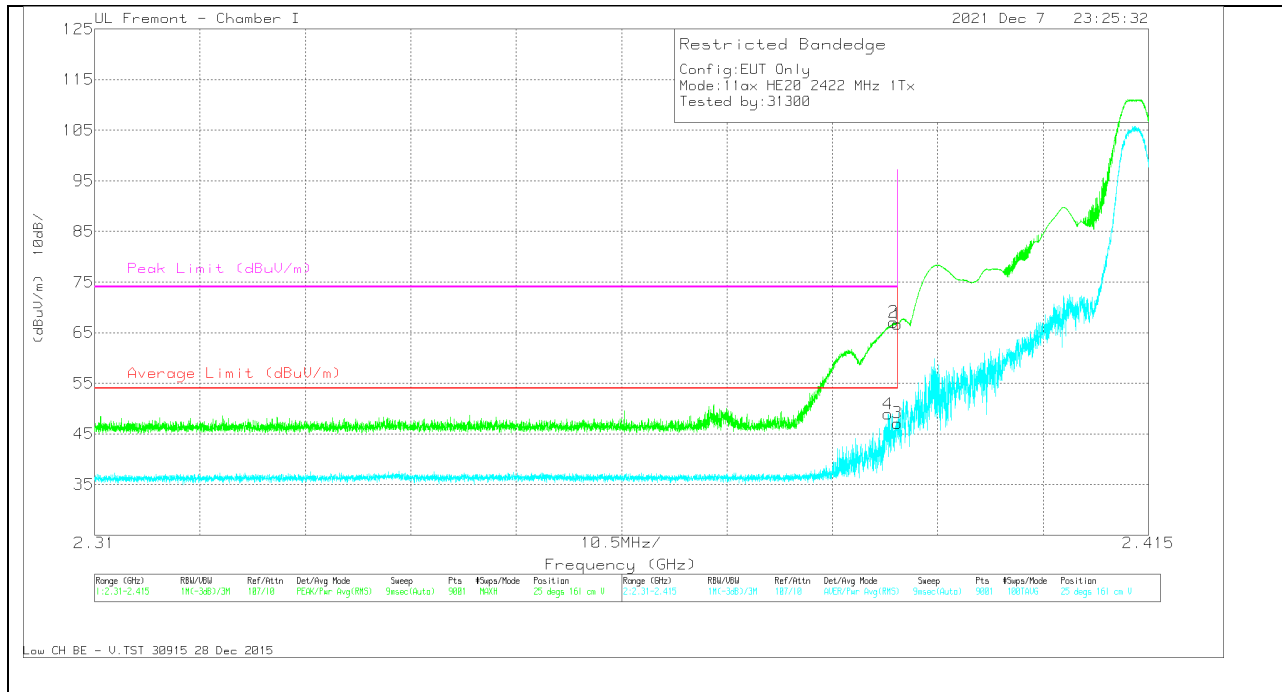


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.63	Pk	31.9	-18.8	0	66.73	-	-	74	-7.27	25	161	V
2	* 2.3895	54.01	Pk	31.9	-18.8	0	67.11	-	-	74	-6.89	25	161	V
3	* 2.39	33.52	RMS	31.9	-18.8	.61	47.23	54	-6.77	-	-	25	161	V
4	* 2.3891	35.33	RMS	31.9	-18.8	.61	49.04	54	-4.96	-	-	25	161	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

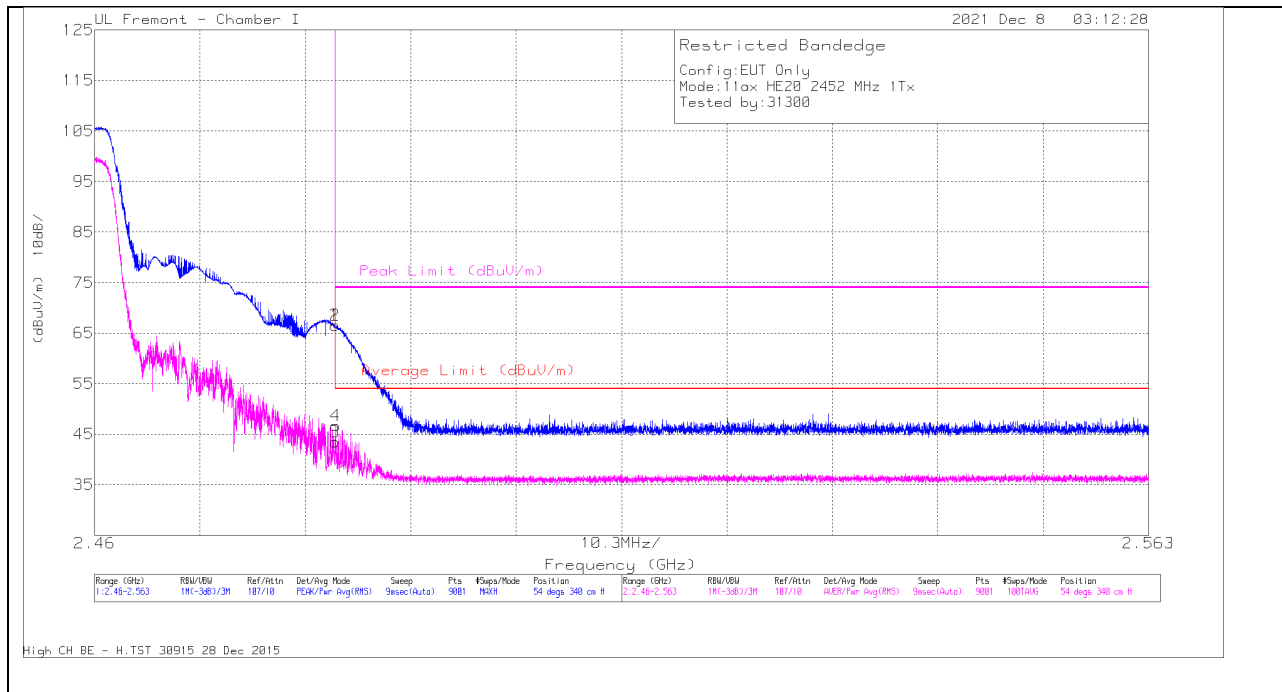

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.71	Pk	32.1	-19.2	0	66.61	-	-	74	-7.39	54	340	H
2	* 2.48352	53.69	Pk	32.1	-19.2	0	66.59	-	-	74	-7.41	54	340	H
3	* 2.4835	30.09	RMS	32.1	-19.2	.61	43.6	54	-10.4	-	-	54	340	H
4	* 2.48355	33.28	RMS	32.1	-19.2	.61	46.79	54	-7.21	-	-	54	340	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

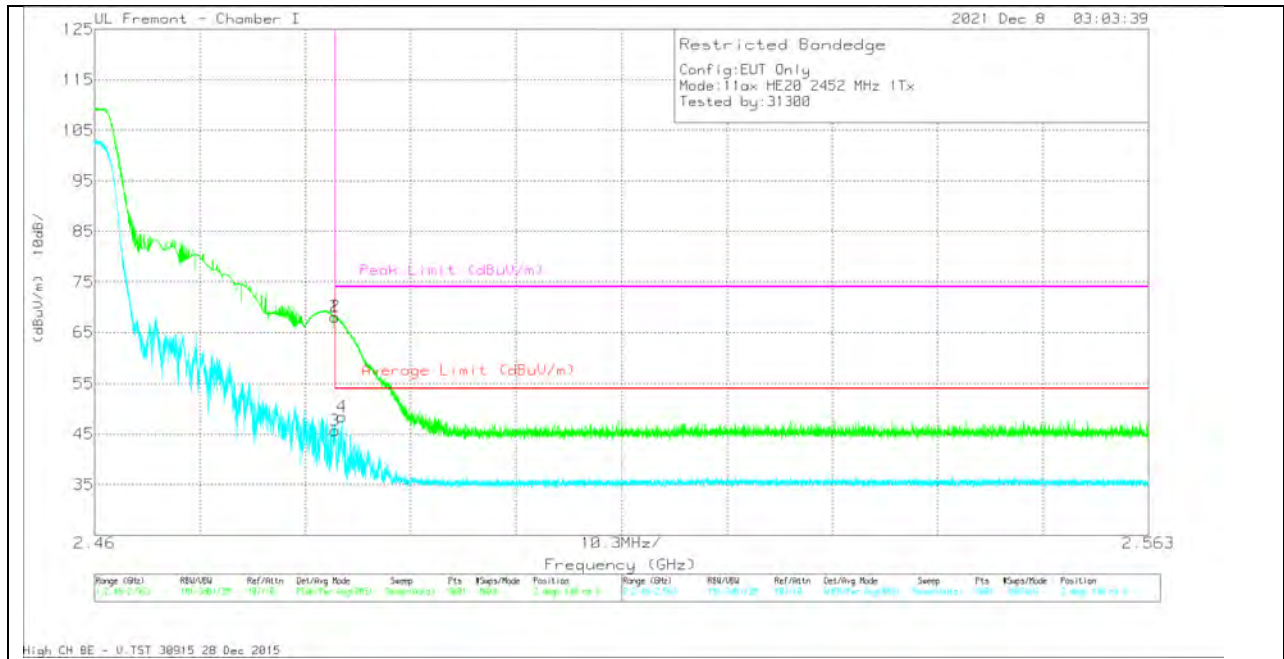


Marker	Frequen- cy (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb/ Filtr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	55.19	Pk	32.1	-19.2	0	68.09	-	-	74	-5.91	2	148	V
2	* 2.48352	55.21	Pk	32.1	-19.2	0	68.11	-	-	74	-5.89	2	148	V
3	* 2.4835	32.34	RMS	32.1	-19.2	.61	45.85	54	-8.15	-	-	2	148	V
4	* 2.48416	35.07	RMS	32.1	-19.2	.61	48.58	54	-5.42	-	-	2	148	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

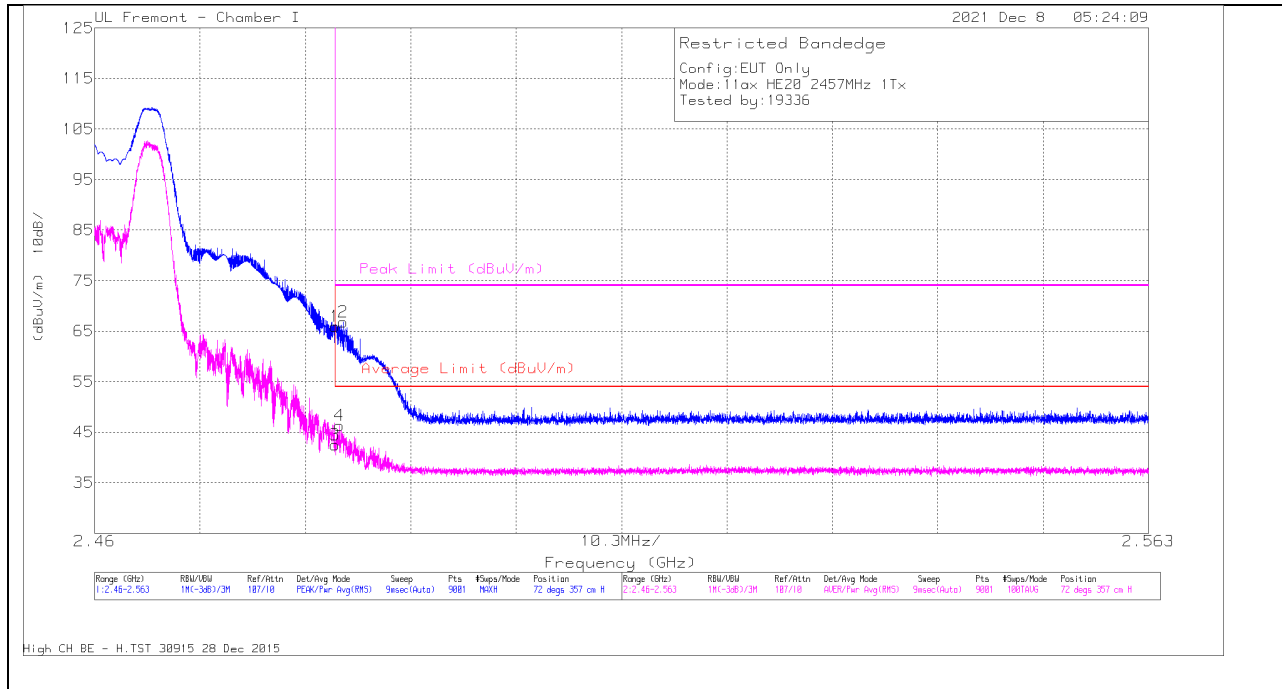

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.05	Pk	32.1	-19.2	0	65.95	-	-	74	-8.05	72	357	H
2	* 2.4843	53.92	Pk	32.1	-19.2	0	66.82	-	-	74	-7.18	72	357	H
3	* 2.4835	29.12	RMS	32.1	-19.2	.61	42.63	54	-11.37	-	-	72	357	H
4	* 2.48395	32.92	RMS	32.1	-19.2	.61	46.43	54	-7.57	-	-	72	357	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

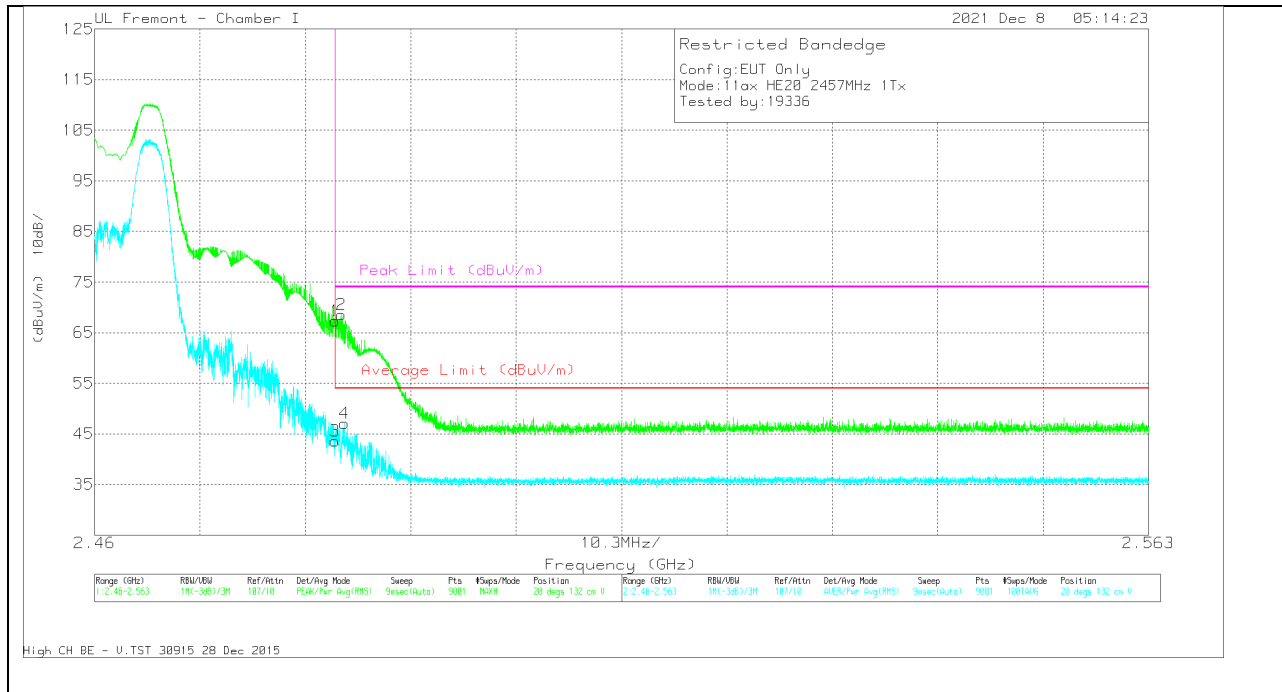


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.41	Pk	32.1	-19.2	0	67.31	-	-	74	-6.69	20	132	V
2	* 2.4841	55.68	Pk	32.1	-19.2	0	68.58	-	-	74	-5.42	20	132	V
3	* 2.4835	30.13	RMS	32.1	-19.2	.61	43.64	54	-10.36	-	-	20	132	V
4	* 2.4844	33.68	RMS	32.1	-19.2	.61	47.19	54	-6.81	-	-	20	132	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

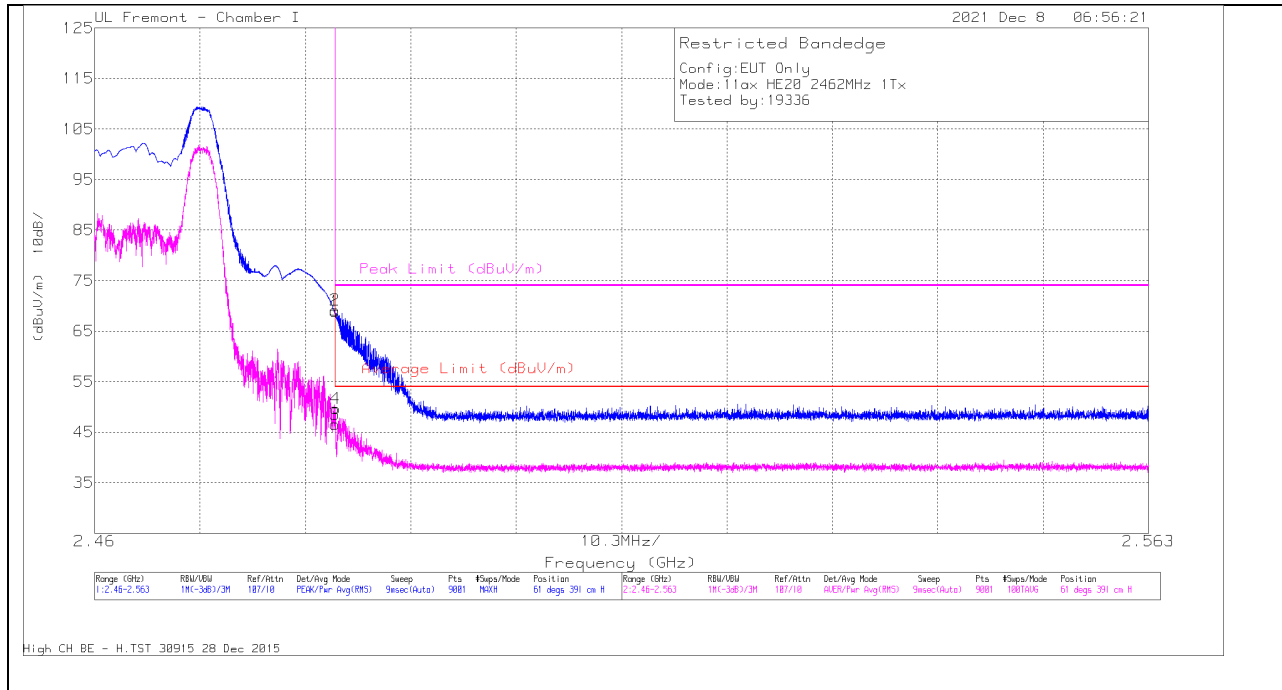

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	56	Pk	32.1	-19.2	0	68.9	-	-	74	-5.1	61	391	H
2	* 2.48351	56.24	Pk	32.1	-19.2	0	69.14	-	-	74	-4.86	61	391	H
3	* 2.4835	33.13	RMS	32.1	-19.2	.61	46.64	54	-7.36	-	-	61	391	H
4	* 2.48353	36.31	RMS	32.1	-19.2	.61	49.82	54	-4.18	-	-	61	391	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

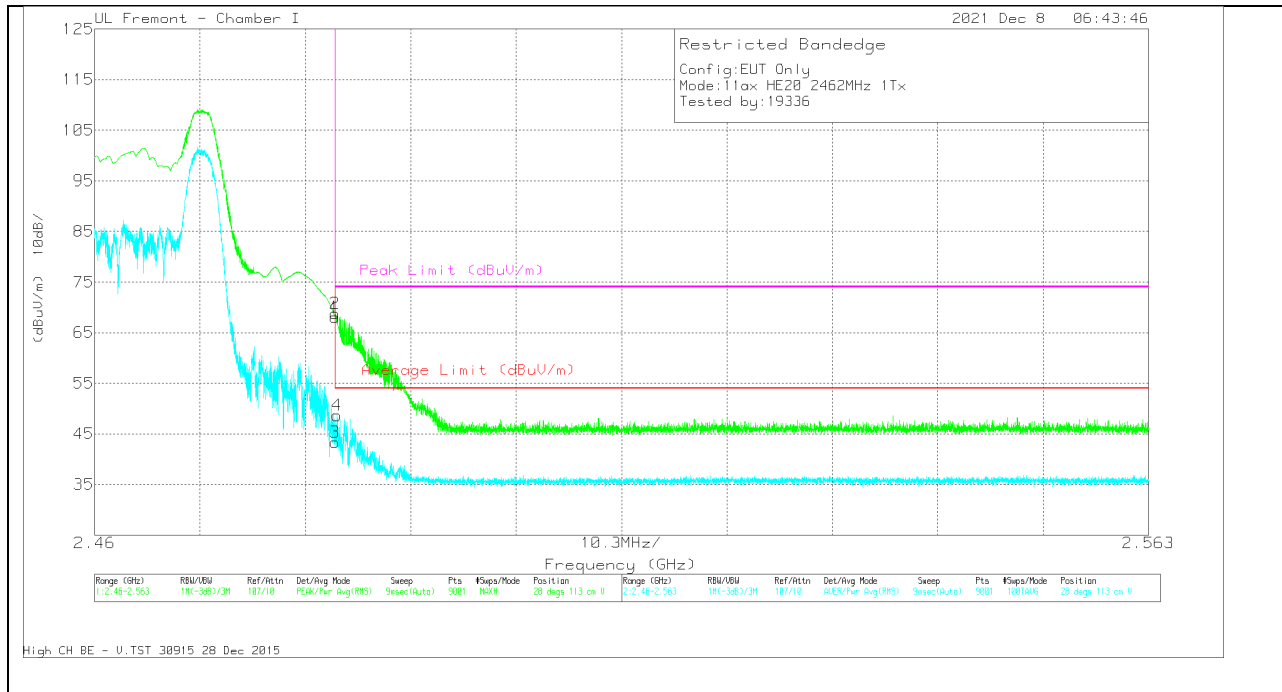

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	55.1	Pk	32.1	-19.2	0	68	-	-	74	-6	28	113	V
2	* 2.48352	55.86	Pk	32.1	-19.2	0	68.76	-	-	74	-5.24	28	113	V
3	* 2.4835	29.97	RMS	32.1	-19.2	.61	43.48	54	-10.52	-	-	28	113	V
4	* 2.4837	35.21	RMS	32.1	-19.2	.61	48.72	54	-5.28	-	-	28	113	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

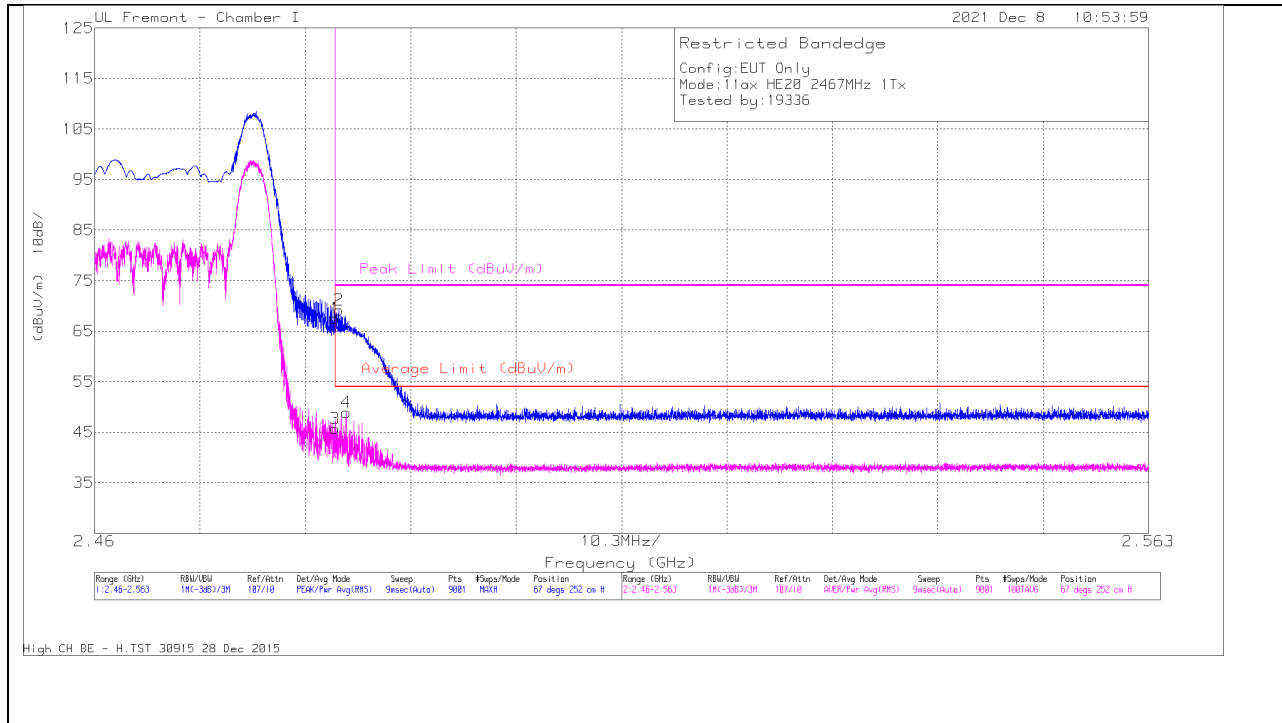

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.64	Pk	32.1	-19.2	0	67.54	-	-	74	-6.46	67	252	H
2	* 2.48388	56.23	Pk	32.1	-19.2	0	69.13	-	-	74	-4.87	67	252	H
3	* 2.4835	32.31	RMS	32.1	-19.2	.61	45.82	54	-8.18	-	-	67	252	H
4	* 2.48459	35.55	RMS	32.1	-19.2	.61	49.06	54	-4.94	-	-	67	252	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

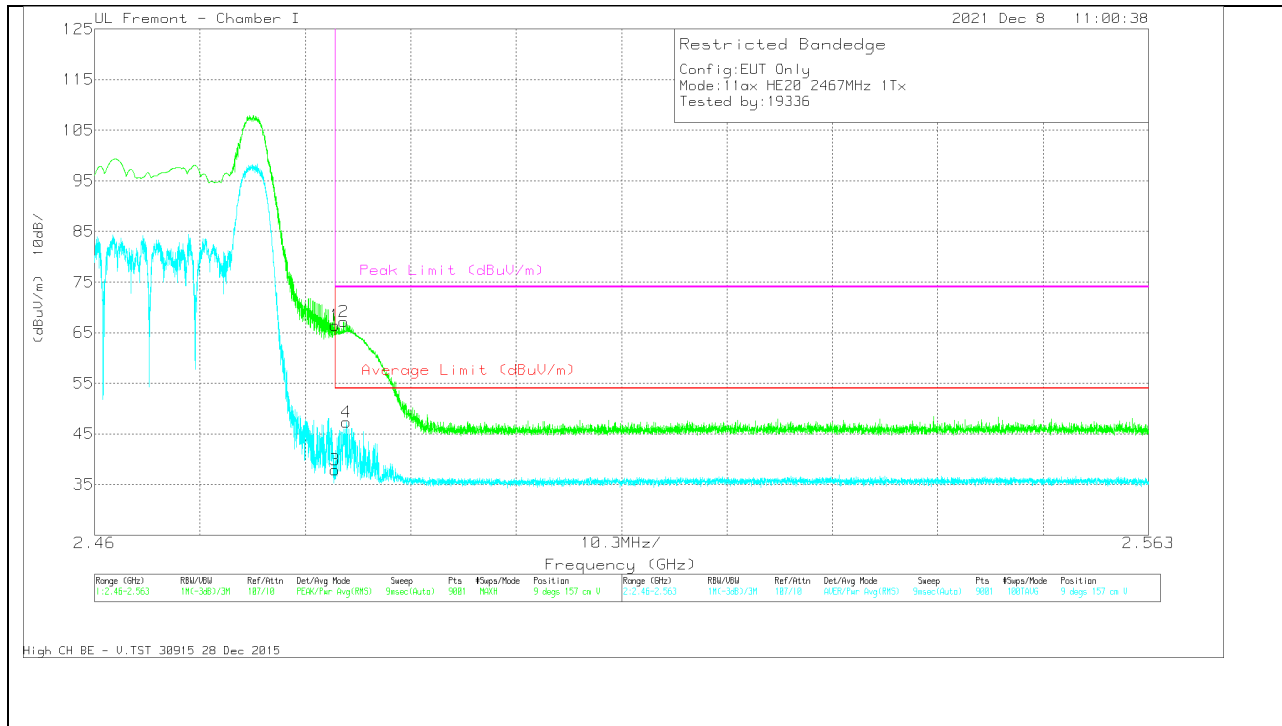


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Fitr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.53	Pk	32.1	-19.2	0	66.43	-	-	74	-7.57	9	157	V
2	* 2.48434	54.24	Pk	32.1	-19.2	0	67.14	-	-	74	-6.86	9	157	V
3	* 2.4835	24.41	RMS	32.1	-19.2	.61	37.92	54	-16.08	-	-	9	157	V
4	* 2.48457	33.92	RMS	32.1	-19.2	.61	47.43	54	-6.57	-	-	9	157	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

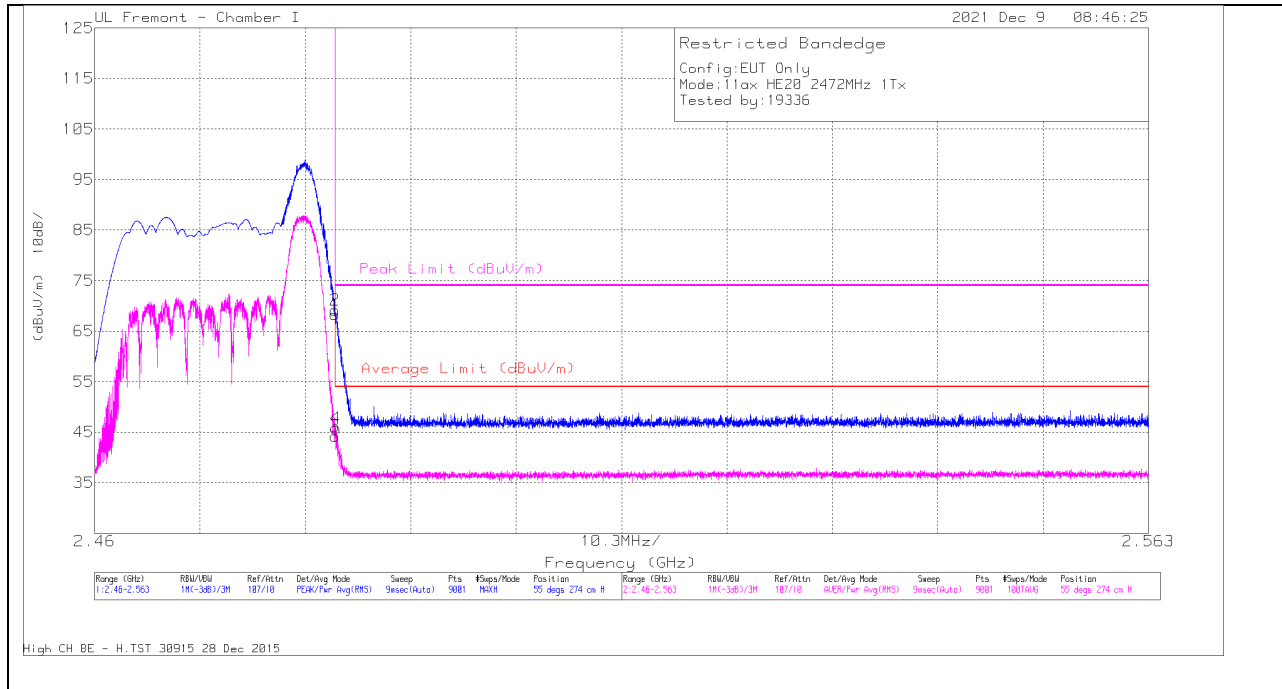

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	55.44	Pk	32.1	-19.2	0	68.34	-	-	74	-5.66	55	274	H
2	* 2.48352	56.31	Pk	32.1	-19.2	0	69.21	-	-	74	-4.79	55	274	H
3	* 2.4835	30.81	RMS	32.1	-19.2	.61	44.32	54	-9.68	-	-	55	274	H
4	* 2.48358	32.46	RMS	32.1	-19.2	.61	45.97	54	-8.03	-	-	55	274	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

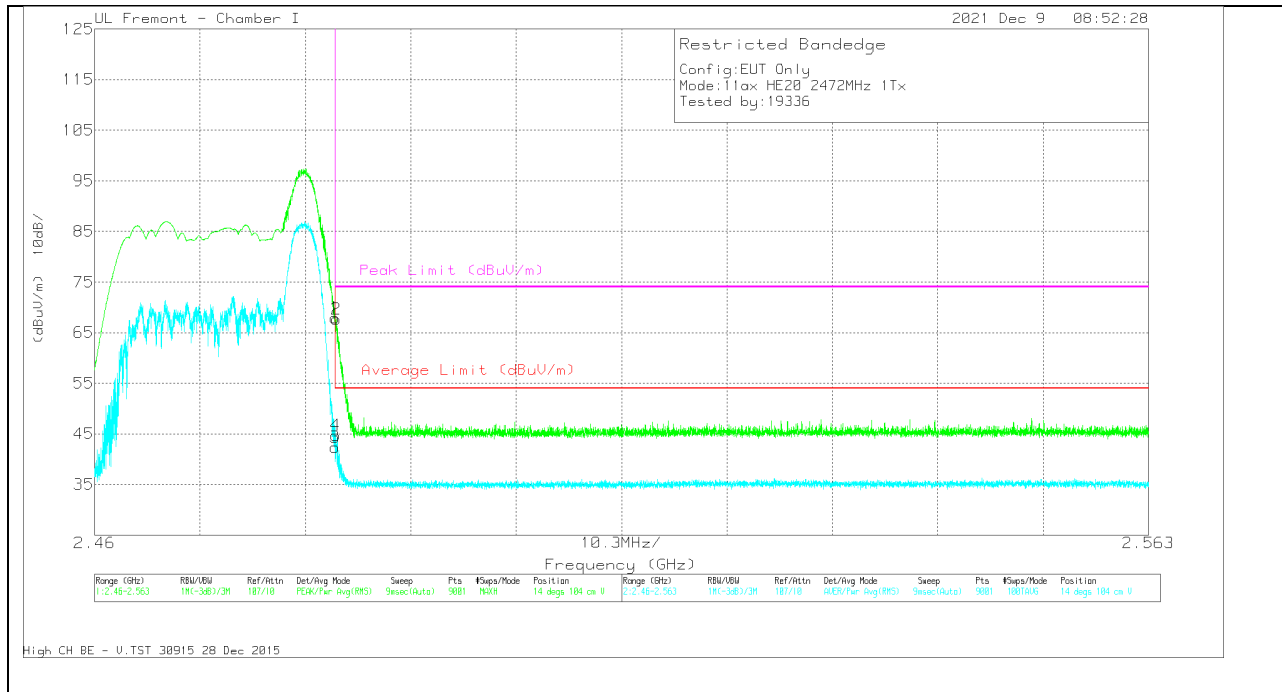


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.97	Pk	32.1	-19.2	0	67.87	-	-	74	-6.13	14	104	V
2	* 2.4836	54.72	Pk	32.1	-19.2	0	67.62	-	-	74	-6.38	14	104	V
3	* 2.4835	28.96	RMS	32.1	-19.2	.61	42.47	54	-11.53	-	-	14	104	V
4	* 2.4836	31.32	RMS	32.1	-19.2	.61	44.83	54	-9.17	-	-	14	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

1TX ANT 3 MODE: RU242-61

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

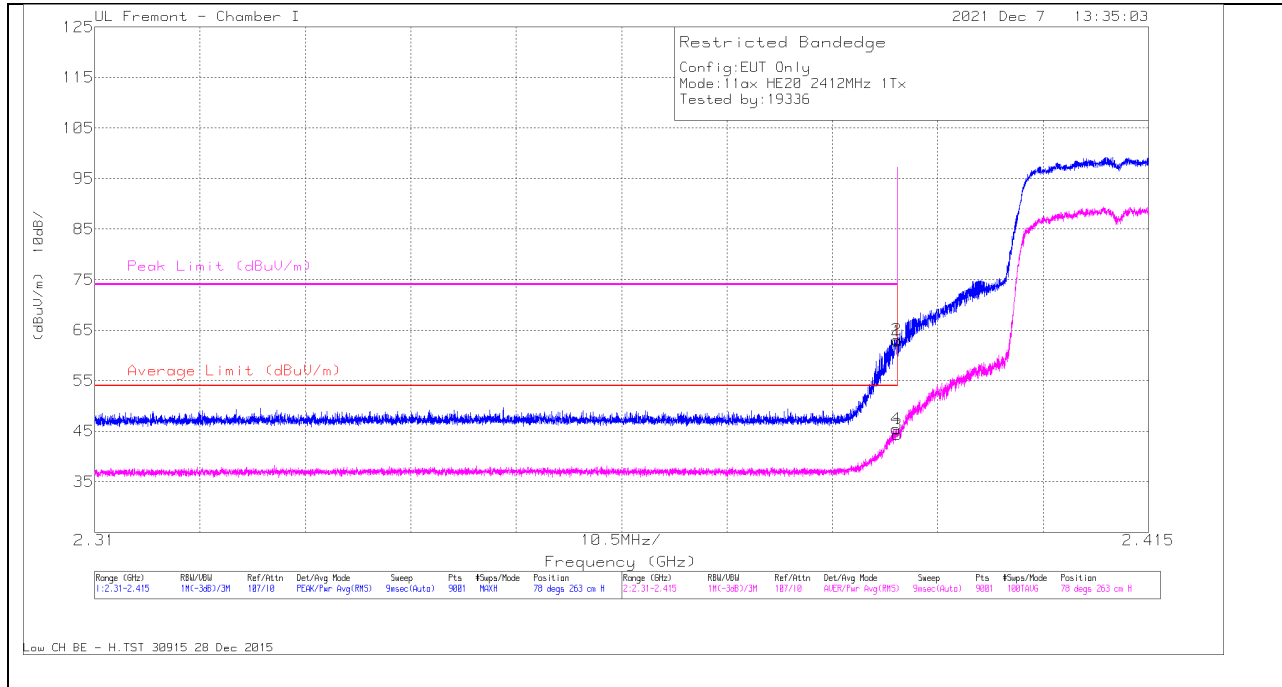


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.78	Pk	31.9	-18.8	0	62.88	-	-	74	-11.12	78	263	H
2	* 2.3897	49.95	Pk	31.9	-18.8	0	63.05	-	-	74	-10.95	78	263	H
3	* 2.39	30.68	RMS	31.9	-18.8	.61	44.39	54	-9.61	-	-	78	263	H
4	* 2.3898	31.81	RMS	31.9	-18.8	.61	45.52	54	-8.48	-	-	78	263	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

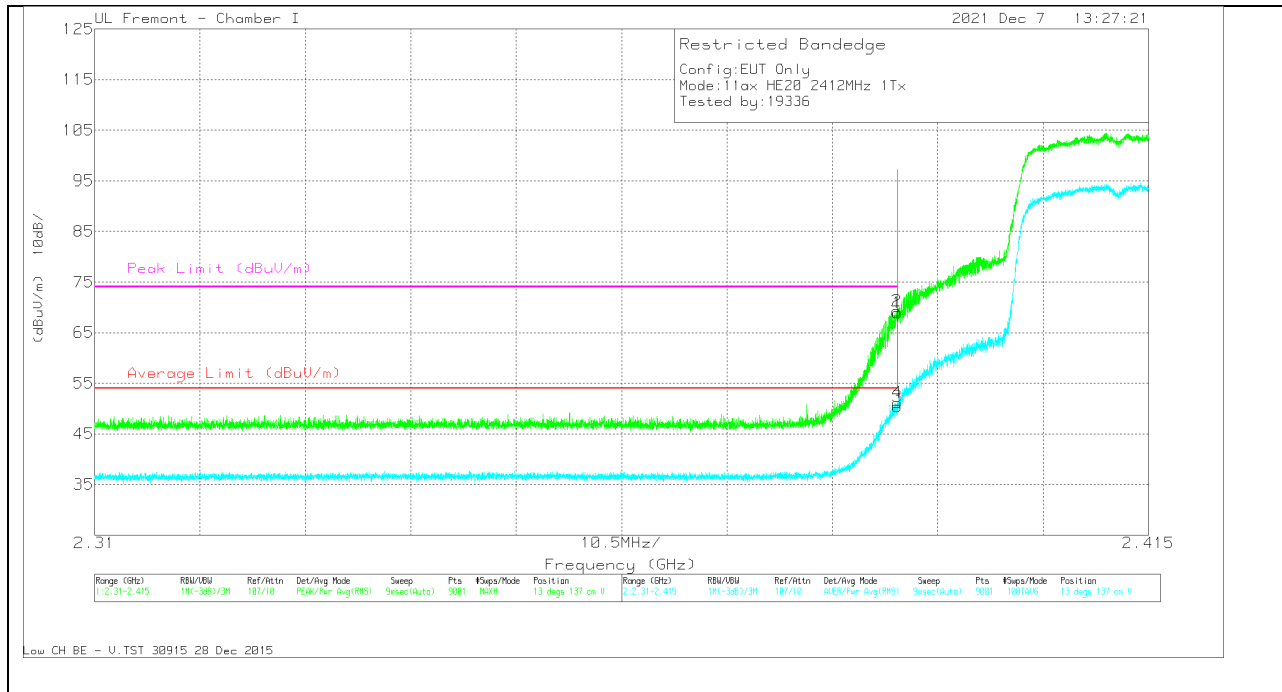

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.83	Pk	31.9	-18.8	0	68.93	-	-	74	-5.07	13	137	V
2	* 2.38993	56.19	Pk	31.9	-18.8	0	69.29	-	-	74	-4.71	13	137	V
3	* 2.39	36.79	RMS	31.9	-18.8	.61	50.50	54	-3.50	-	-	13	137	V
4	* 2.38999	37.45	RMS	31.9	-18.8	.61	51.16	54	-2.84	-	-	13	137	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

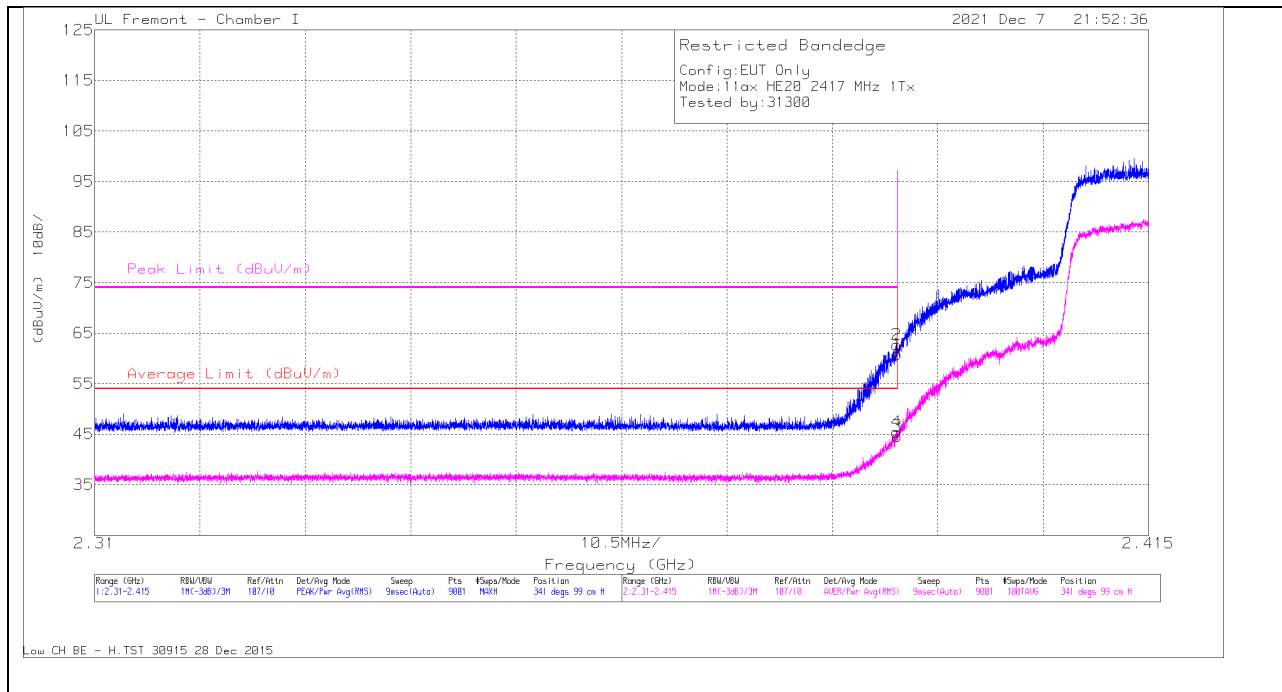

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	47.78	Pk	31.9	-18.8	0	60.88	-	-	74	-13.12	341	99	H
2	* 2.38993	49.59	Pk	31.9	-18.8	0	62.69	-	-	74	-11.31	341	99	H
3	* 2.39	30.98	RMS	31.9	-18.8	.61	44.69	54	-9.31	-	-	341	99	H
4	* 2.38992	31.84	RMS	31.9	-18.8	.61	45.55	54	-8.45	-	-	341	99	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

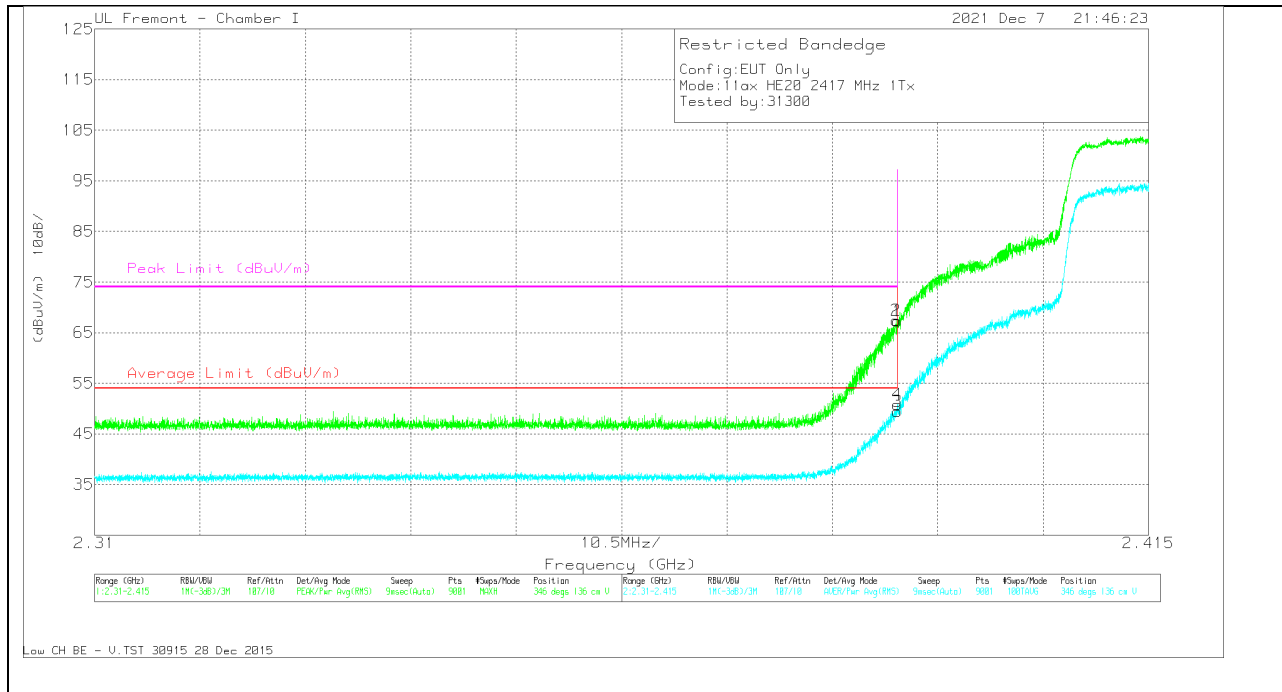

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.26	Pk	31.9	-18.8	0	67.36	-	-	74	-6.64	346	136	V
2	* 2.3898	54.34	Pk	31.9	-18.8	0	67.44	-	-	74	-6.56	346	136	V
3	* 2.39	35.71	RMS	31.9	-18.8	.61	49.42	54	-4.58	-	-	346	136	V
4	* 2.38997	37.12	RMS	31.9	-18.8	.61	50.83	54	-3.17	-	-	346	136	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

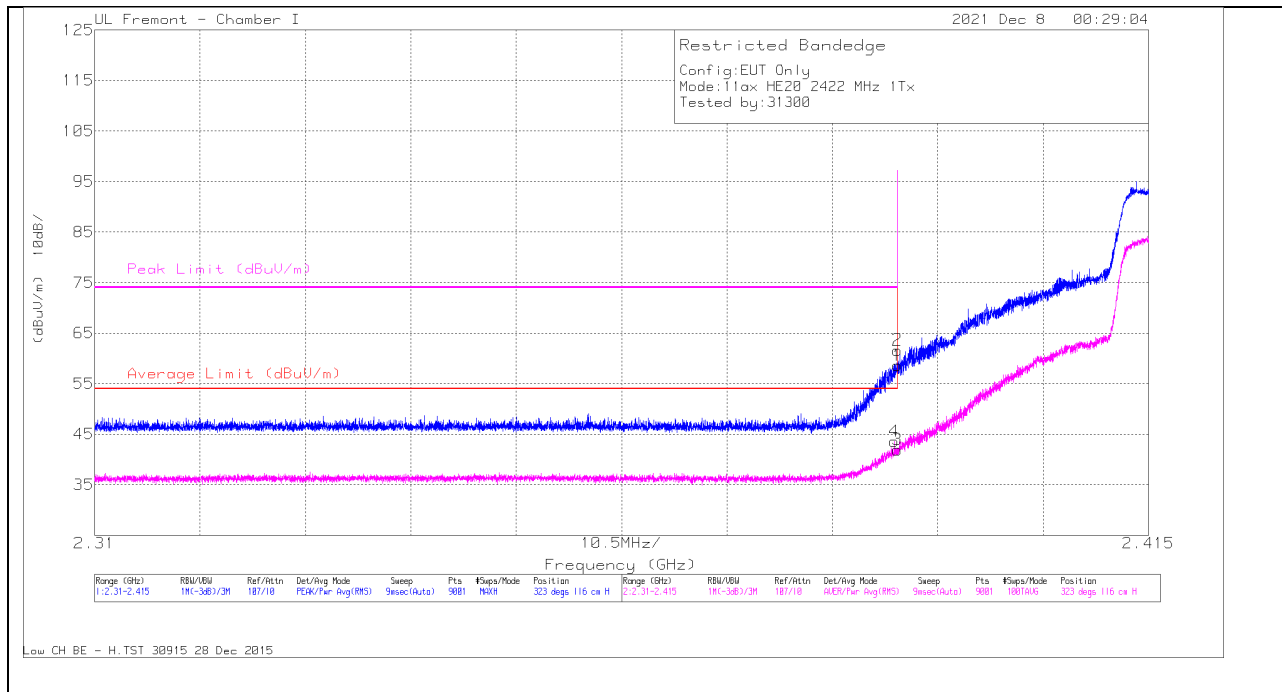

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.48	Pk	31.9	-18.8	0	58.58	-	-	74	-15.42	323	116	H
2	* 2.3899	48.55	Pk	31.9	-18.8	0	61.65	-	-	74	-12.35	323	116	H
3	* 2.39	28.26	RMS	31.9	-18.8	.61	41.97	54	-12.03	-	-	323	116	H
4	* 2.38967	29.89	RMS	31.9	-18.8	.61	43.60	54	-10.40	-	-	323	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

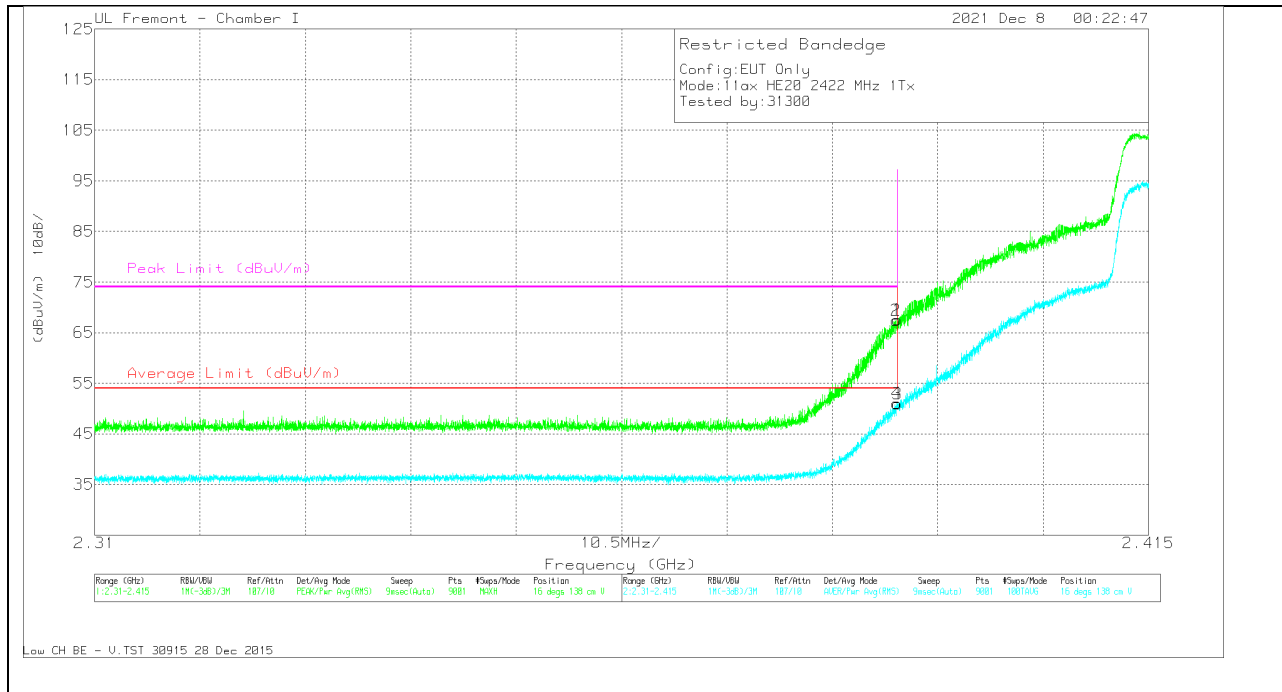

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.43	Pk	31.9	-18.8	0	67.53	-	-	74	-6.47	16	138	V
2	* 2.3898	54.36	Pk	31.9	-18.8	0	67.46	-	-	74	-6.54	16	138	V
3	* 2.39	37.26	RMS	31.9	-18.8	.61	50.97	54	-3.03	-	-	16	138	V
4	* 2.3899	37.33	RMS	31.9	-18.8	.61	51.04	54	-2.96	-	-	16	138	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

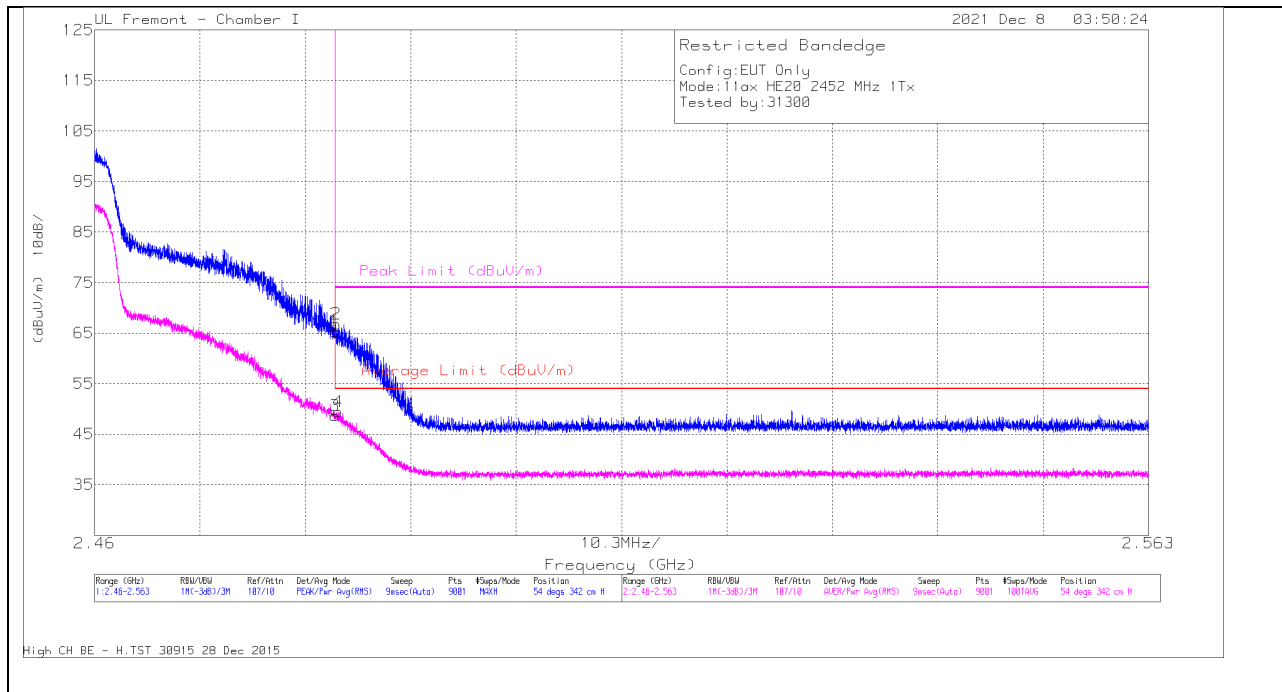

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	52.4	Pk	32.1	-19.2	0	65.3	-	-	74	-8.7	54	342	H
2	* 2.48358	53.9	Pk	32.1	-19.2	0	66.8	-	-	74	-7.2	54	342	H
3	* 2.4835	35.2	RMS	32.1	-19.2	.61	48.71	54	-5.29	-	-	54	342	H
4	* 2.48382	36.01	RMS	32.1	-19.2	.61	49.52	54	-4.48	-	-	54	342	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

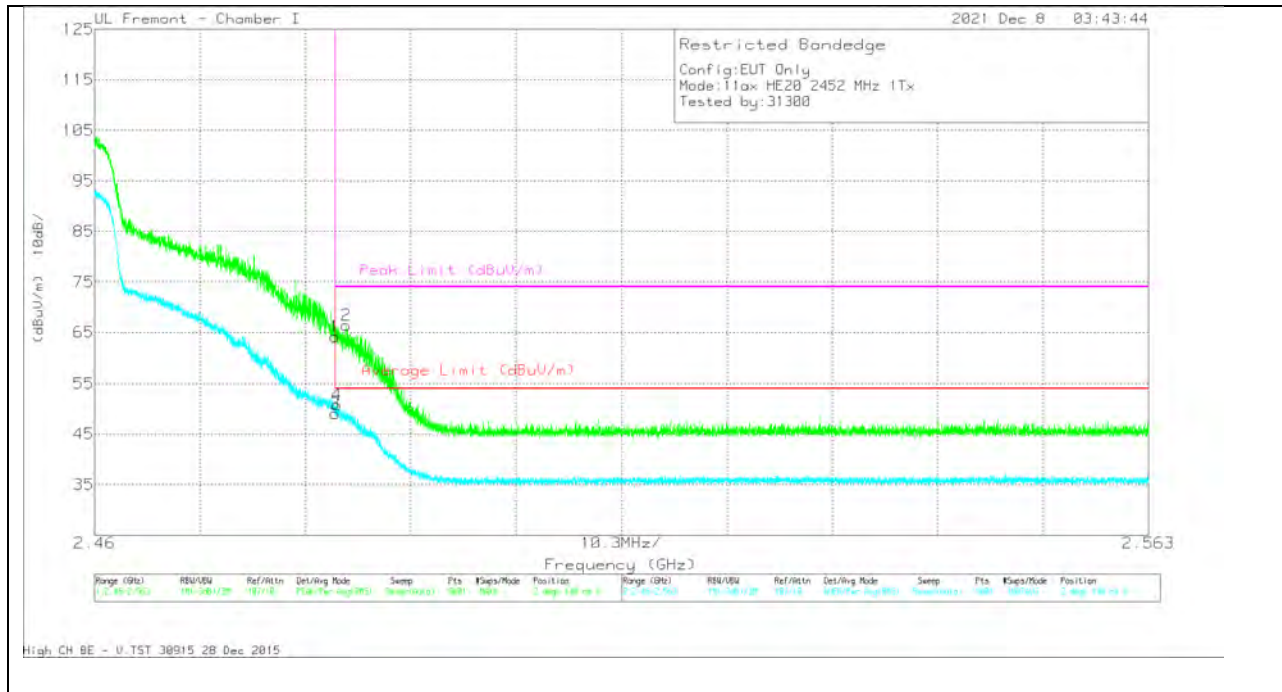


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	51.34	Pk	32.1	-19.2	0	64.24	-	-	74	-9.76	2	148	V
2	* 2.4846	53.52	Pk	32.1	-19.2	0	66.42	-	-	74	-7.58	2	148	V
3	* 2.4835	35.58	RMS	32.1	-19.2	.61	49.09	54	-4.91	-	-	2	148	V
4	* 2.4837	37.36	RMS	32.1	-19.2	.61	50.87	54	-3.13	-	-	2	148	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

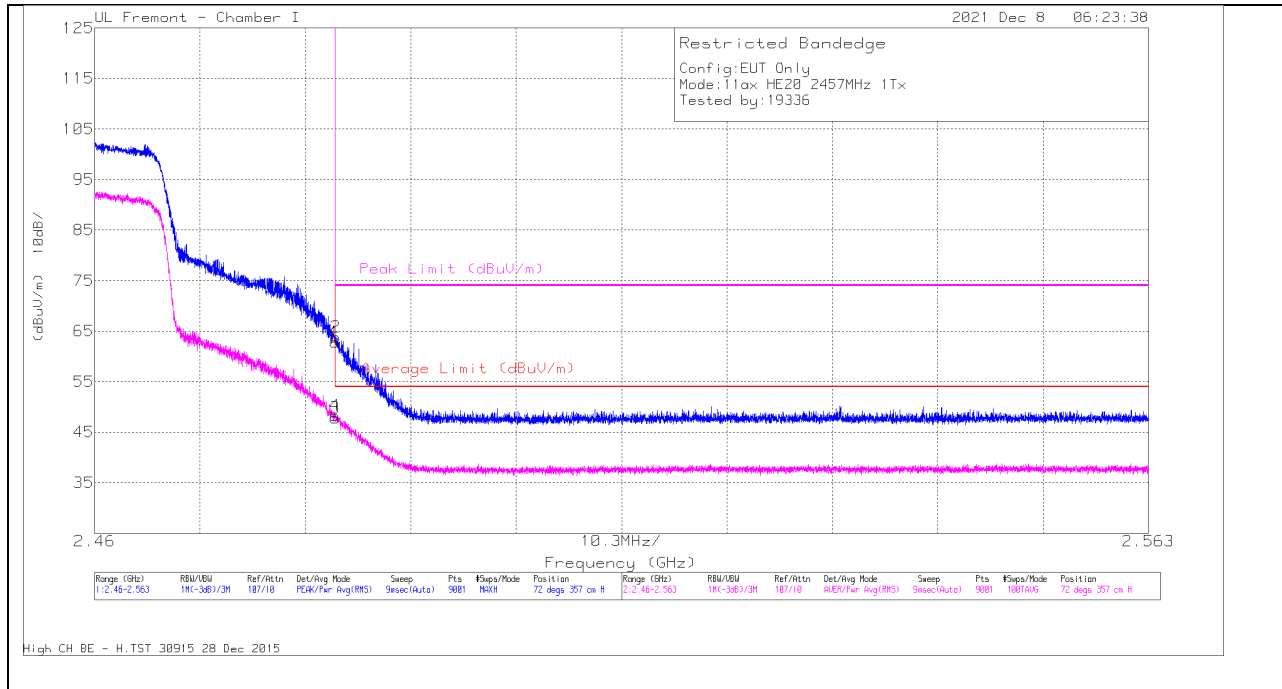


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	49.96	Pk	32.1	-19.2	0	62.86	-	-	74	-11.14	72	357	H
2	* 2.48355	50.97	Pk	32.1	-19.2	0	63.87	-	-	74	-10.13	72	357	H
3	* 2.4835	34.39	RMS	32.1	-19.2	.61	47.90	54	-6.10	-	-	72	357	H
4	* 2.48352	34.82	RMS	32.1	-19.2	.61	48.33	54	-5.67	-	-	72	357	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

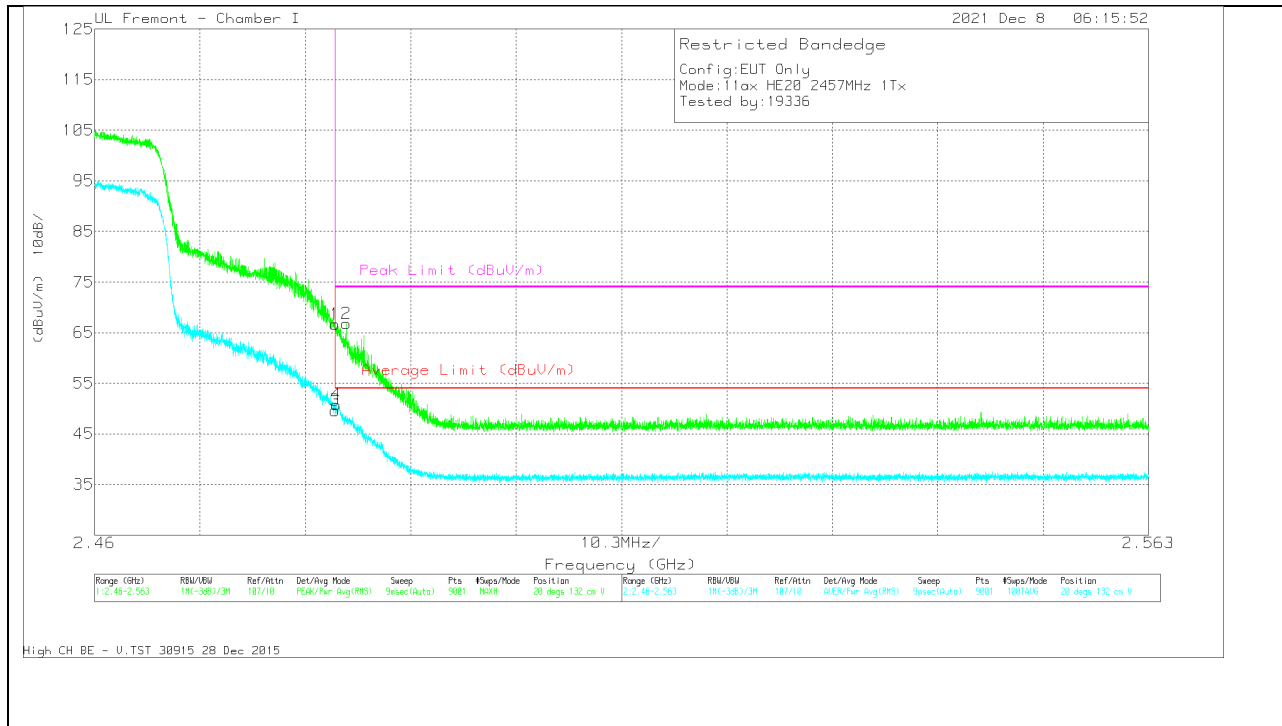

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.82	Pk	32.1	-19.2	0	66.72	-	-	74	-7.28	20	132	V
2	* 2.48459	53.88	Pk	32.1	-19.2	0	66.78	-	-	74	-7.22	20	132	V
3	* 2.4835	36.15	RMS	32.1	-19.2	.61	49.66	54	-4.34	-	-	20	132	V
4	* 2.48363	37.29	RMS	32.1	-19.2	.61	50.80	54	-3.20	-	-	20	132	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

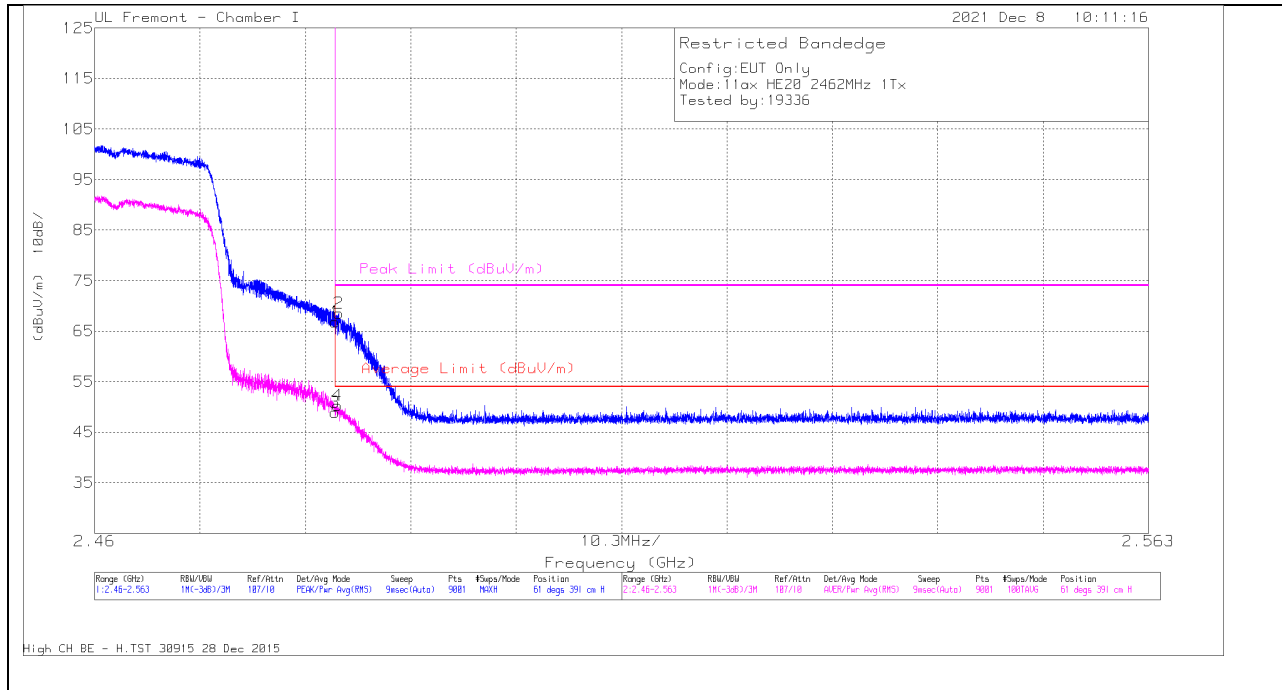

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.94	Pk	32.1	-19.2	0	66.84	-	-	74	-7.16	61	391	H
2	* 2.48384	55.69	Pk	32.1	-19.2	0	68.59	-	-	74	-5.41	61	391	H
3	* 2.4835	35.48	RMS	32.1	-19.2	.61	48.99	54	-5.01	-	-	61	391	H
4	* 2.4837	36.8	RMS	32.1	-19.2	.61	50.31	54	-3.69	-	-	61	391	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

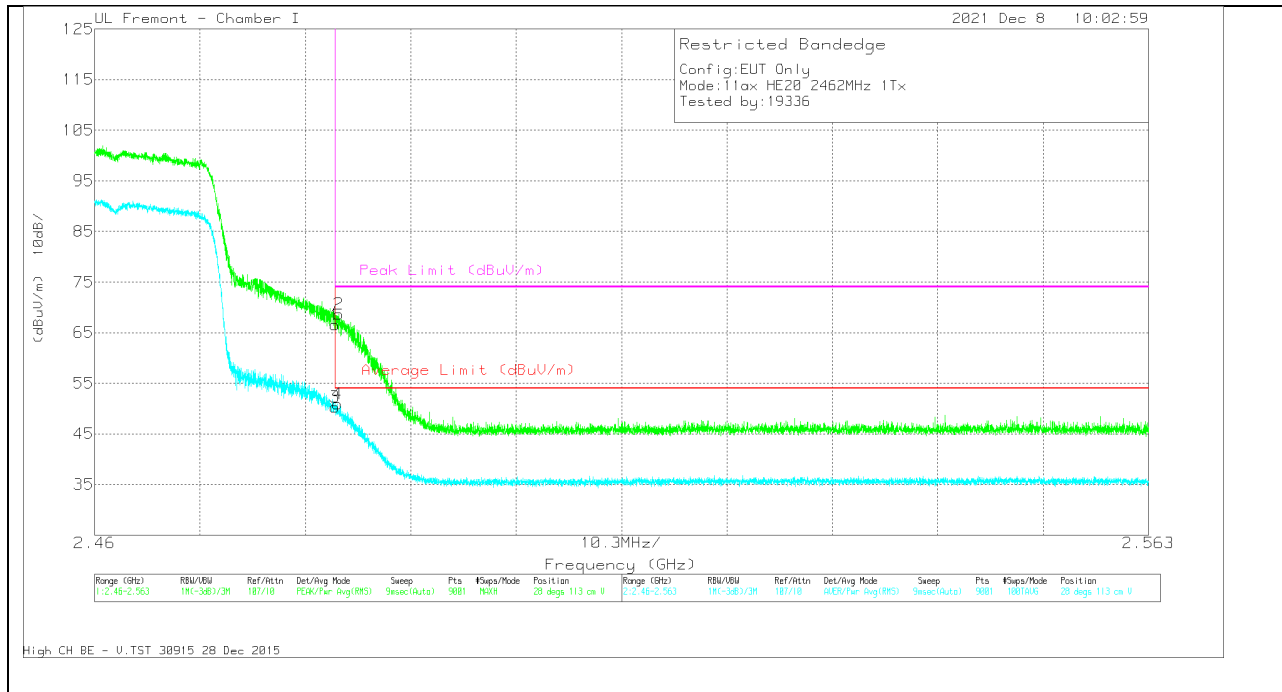


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.64	Pk	32.1	-19.2	0	66.54	-	-	74	-7.46	28	113	V
2	* 2.48386	55.78	Pk	32.1	-19.2	0	68.68	-	-	74	-5.32	28	113	V
3	* 2.4835	36.87	RMS	32.1	-19.2	.61	50.38	54	-3.62	-	-	28	113	V
4	* 2.48374	37.43	RMS	32.1	-19.2	.61	50.94	54	-3.06	-	-	28	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

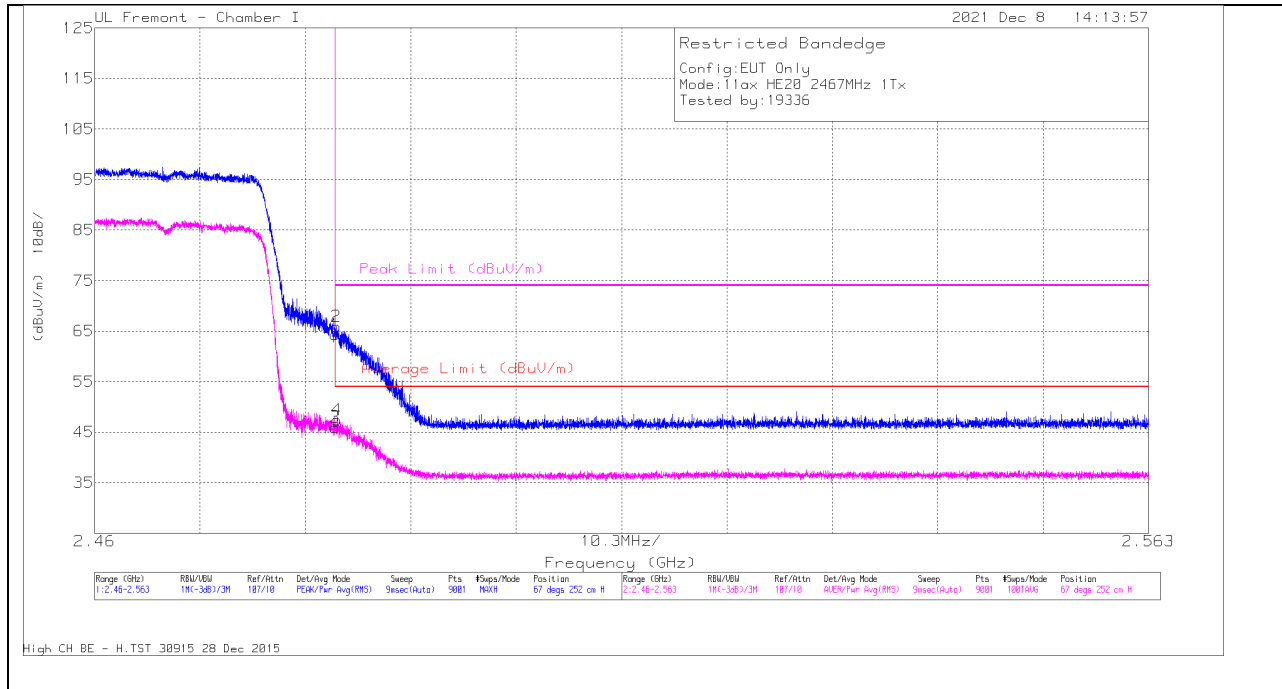

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Fitr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	51.43	Pk	32.1	-19.2	0	64.33	-	-	74	-9.67	67	252	H
2	* 2.48359	53.07	Pk	32.1	-19.2	0	65.97	-	-	74	-8.03	67	252	H
3	* 2.4835	32.54	RMS	32.1	-19.2	.61	46.05	54	-7.95	-	-	67	252	H
4	* 2.48365	33.92	RMS	32.1	-19.2	.61	47.43	54	-6.57	-	-	67	252	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

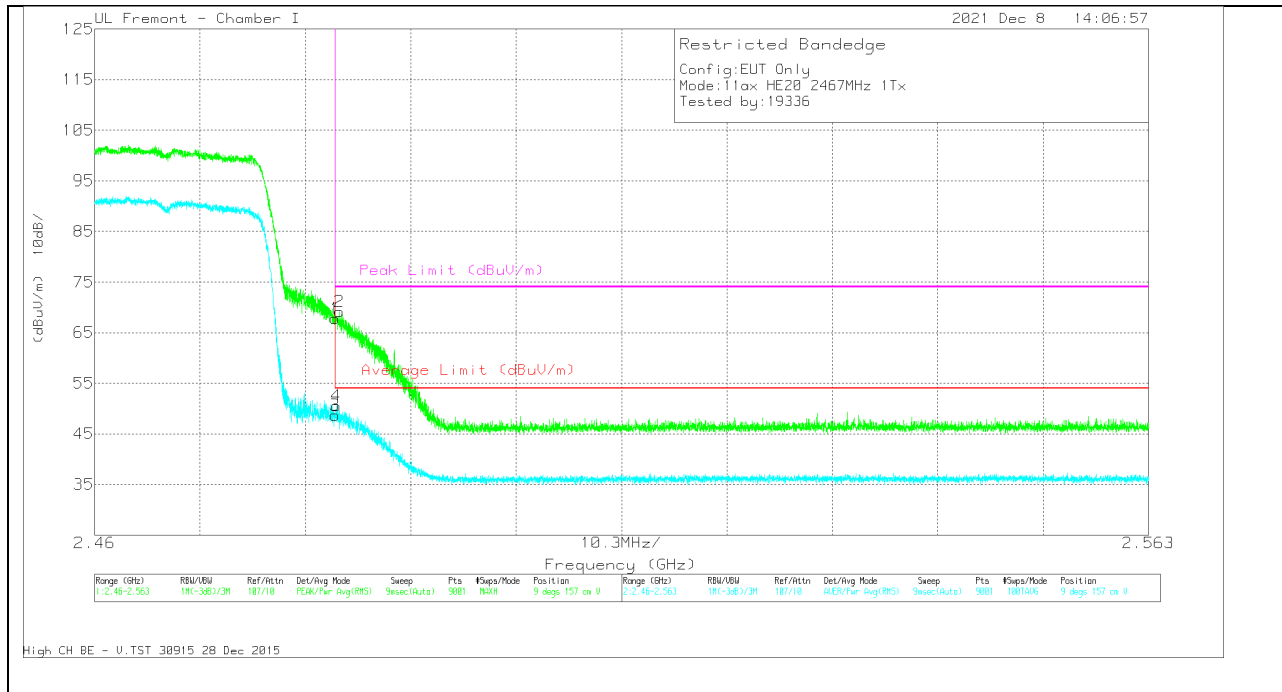


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.9	Pk	32.1	-19.2	0	67.8	-	-	74	-6.2	9	157	V
2	* 2.48394	56.28	Pk	32.1	-19.2	0	69.18	-	-	74	-4.82	9	157	V
3	* 2.4835	35.18	RMS	32.1	-19.2	.61	48.69	54	-5.31	-	-	9	157	V
4	* 2.48361	37.06	RMS	32.1	-19.2	.61	50.57	54	-3.43	-	-	9	157	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

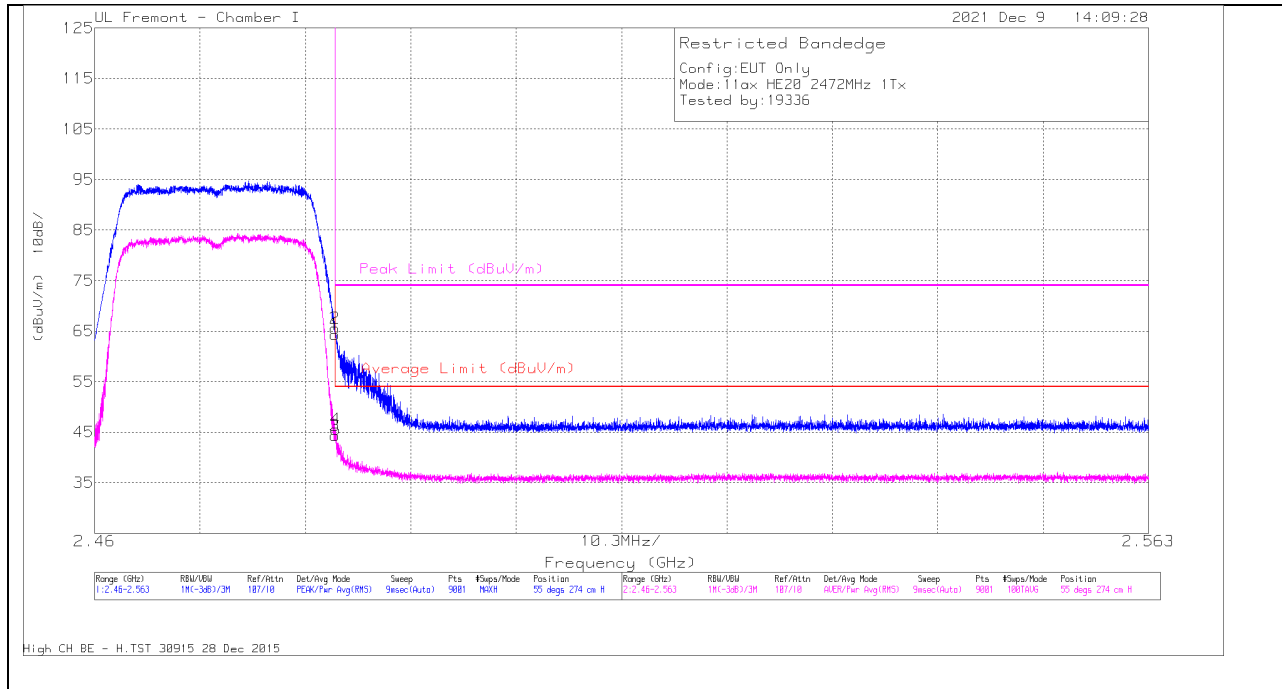


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	51.46	Pk	32.1	-19.2	0	64.36	-	-	74	-9.64	55	274	H
2	* 2.48352	52.68	Pk	32.1	-19.2	0	65.58	-	-	74	-8.42	55	274	H
3	* 2.4835	30.89	RMS	32.1	-19.2	.61	44.40	54	-9.60	-	-	55	274	H
4	* 2.48353	32.15	RMS	32.1	-19.2	.61	45.66	54	-8.34	-	-	55	274	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

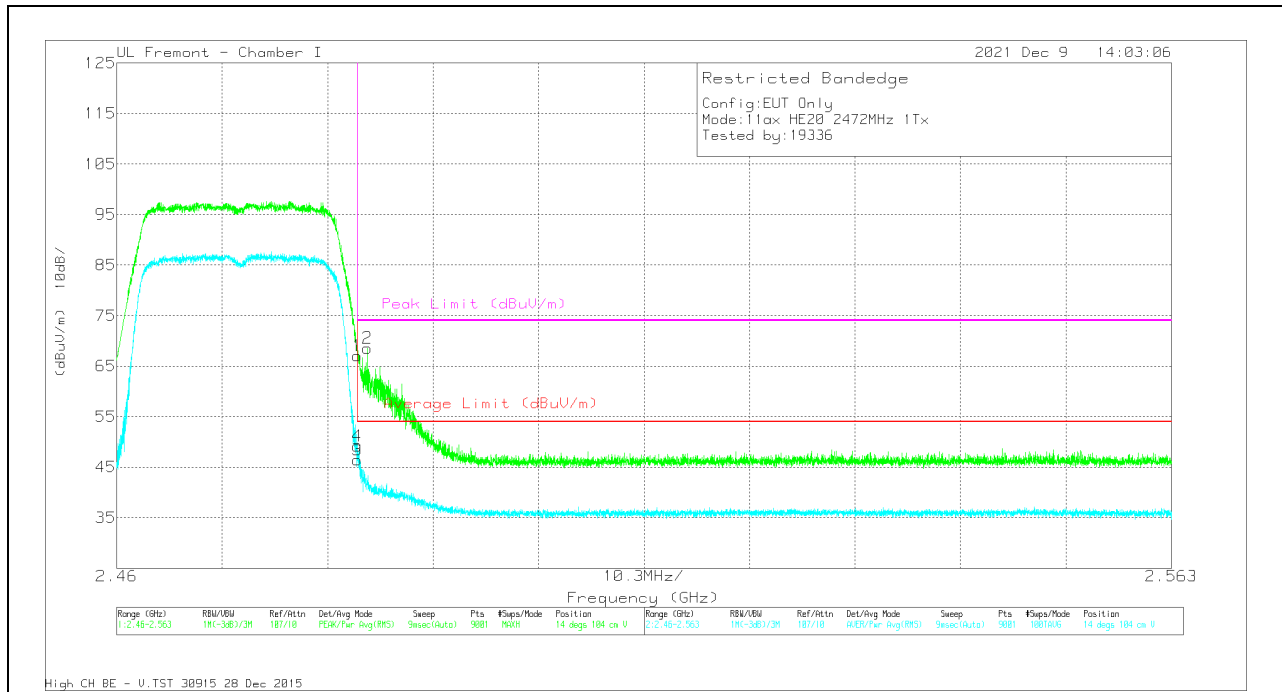

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.19	Pk	32.1	-19.2	0	67.09	-	-	74	-6.91	14	104	V
2	* 2.48449	55.7	Pk	32.1	-19.2	0	68.6	-	-	74	-5.4	14	104	V
3	* 2.4835	33.02	RMS	32.1	-19.2	.61	46.53	54	-7.47	-	-	14	104	V
4	* 2.48352	35.68	RMS	32.1	-19.2	.61	49.19	54	-4.81	-	-	14	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX ANT 3 MODE: SU

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

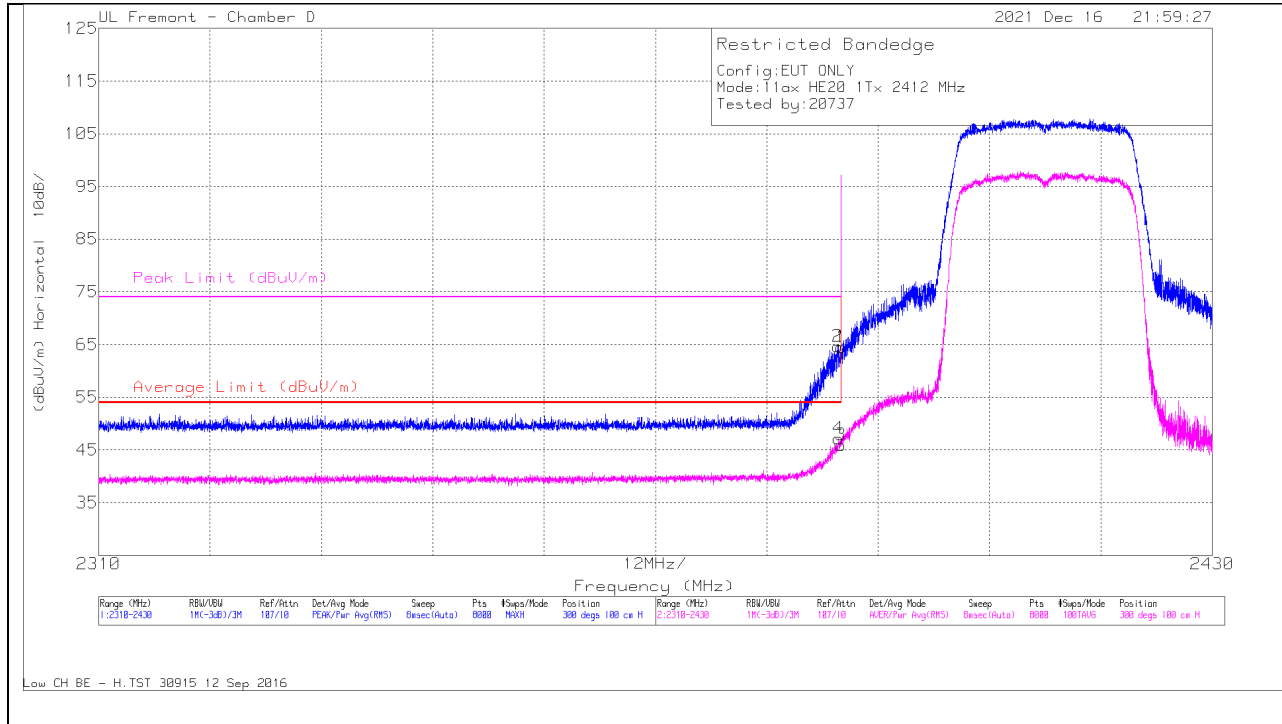

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	53.07	Pk	32.1	-20.7	0	64.47	-	-	74	-9.53	300	100	H
2	* 2389.62	53.21	Pk	32.1	-20.7	0	64.61	-	-	74	-9.39	300	100	H
3	* 2390	34	RMS	32.1	-20.7	.55	45.95	54	-8.05	-	-	300	100	H
4	* 2389.74	35.22	RMS	32.1	-20.7	.55	47.17	54	-6.83	-	-	300	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

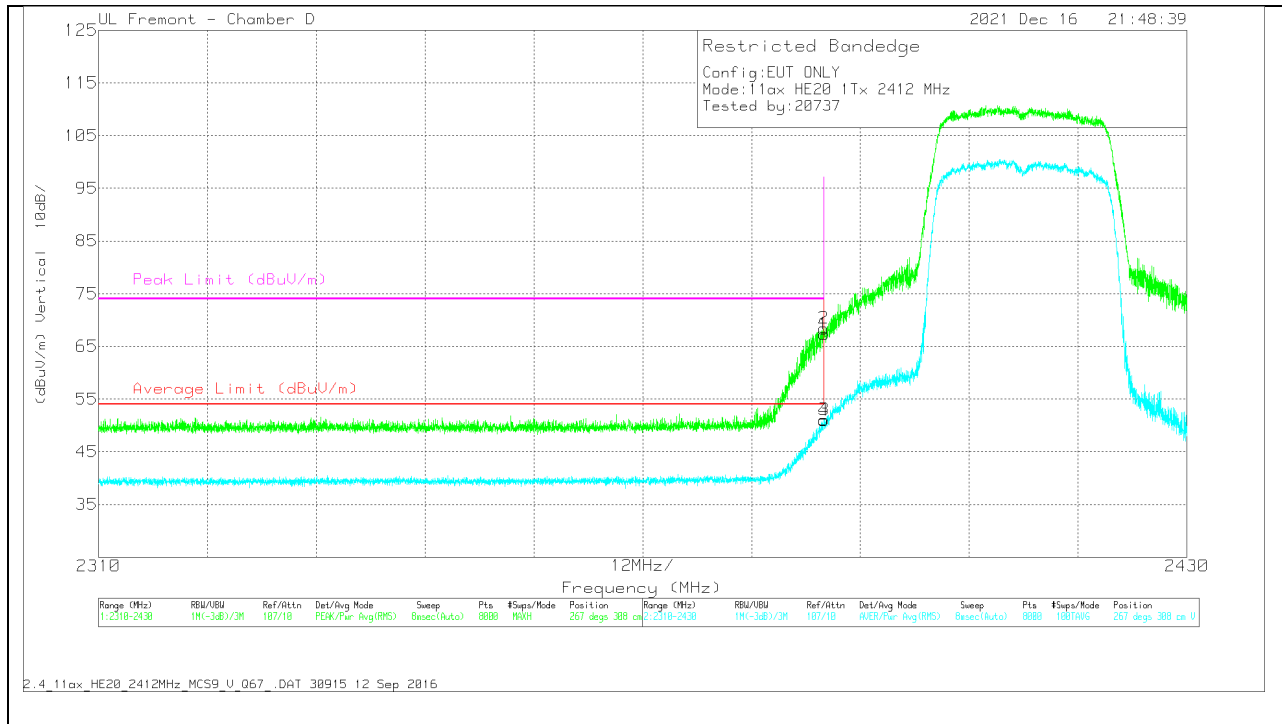

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	55.93	Pk	32.1	-20.7	0	67.33	-	-	74	-6.67	267	308	V
2	* 2389.98	57	Pk	32.1	-20.7	0	68.4	-	-	74	-5.6	267	308	V
3	* 2390	39.14	RMS	32.1	-20.7	.55	51.09	54	-2.91	-	-	267	308	V
4	* 2389.99	39.02	RMS	32.1	-20.7	.55	50.97	54	-3.03	-	-	267	308	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

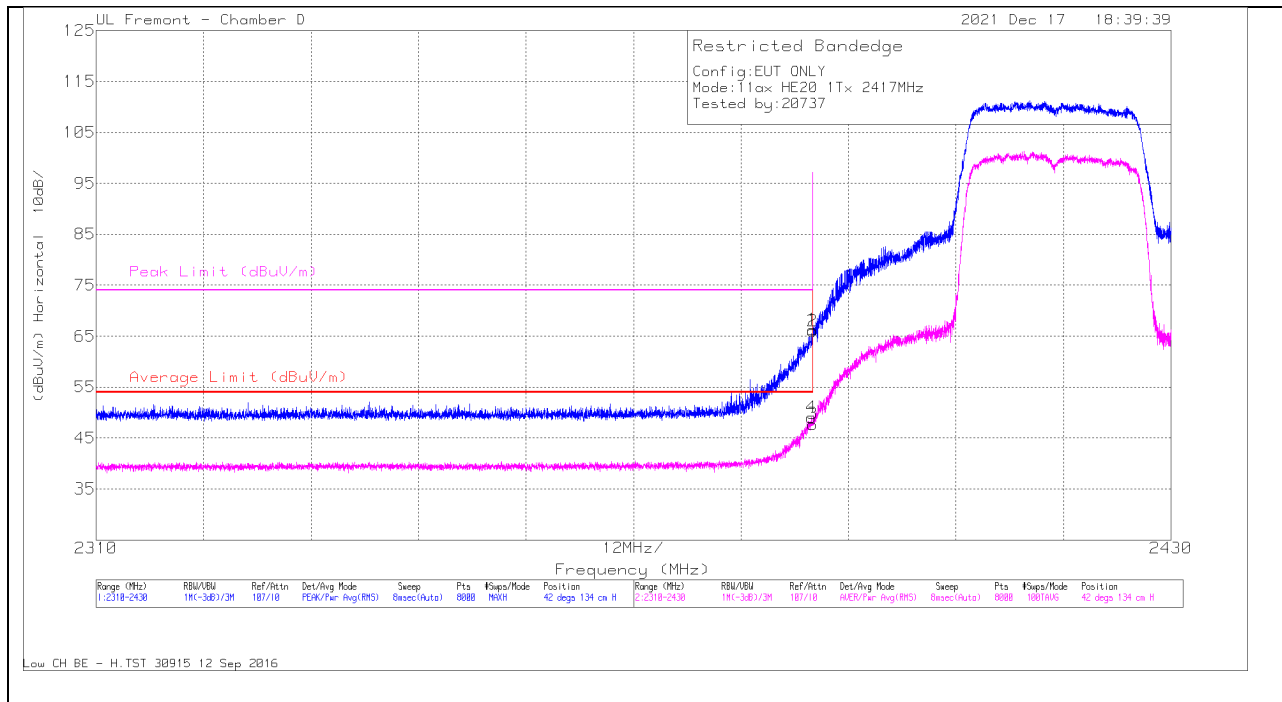


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2389.89	37.11	RMS	32.1	-20.7	.55	49.06	54	-4.94	-	-	42	134	H
2	* 2389.99	54.56	Pk	32.1	-20.7	0	65.96	-	-	74	-8.04	42	134	H
1	* 2390	54.81	Pk	32.1	-20.7	0	66.21	-	-	74	-7.79	42	134	H
3	* 2390	35.8	RMS	32.1	-20.7	.55	47.75	54	-6.25	-	-	42	134	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

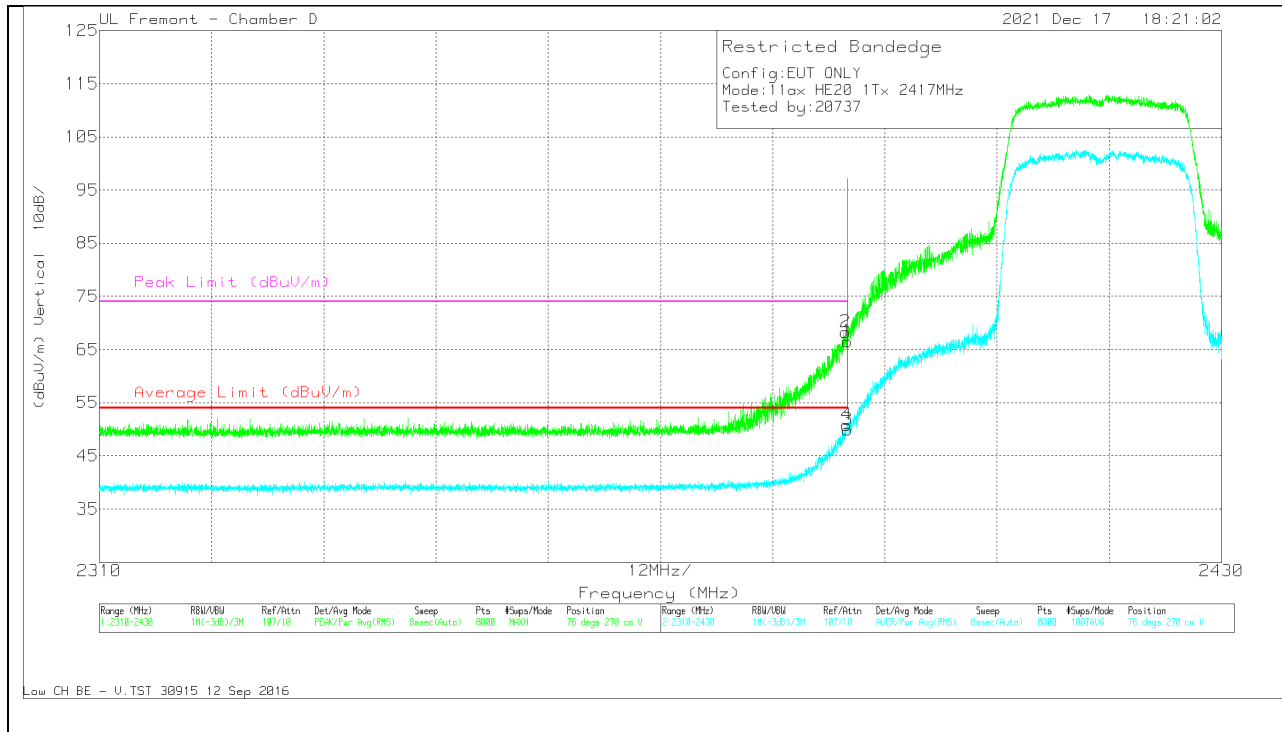

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	55.09	Pk	32.1	-20.7	0	66.49	-	-	74	-7.51	76	270	V
2	* 2389.80	56.83	Pk	32.1	-20.7	0	68.23	-	-	74	-5.77	76	270	V
3	* 2390	38.01	RMS	32.1	-20.7	.55	49.96	54	-4.04	-	-	76	270	V
4	* 2389.95	38.89	RMS	32.1	-20.7	.55	50.84	54	-3.16	-	-	76	270	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

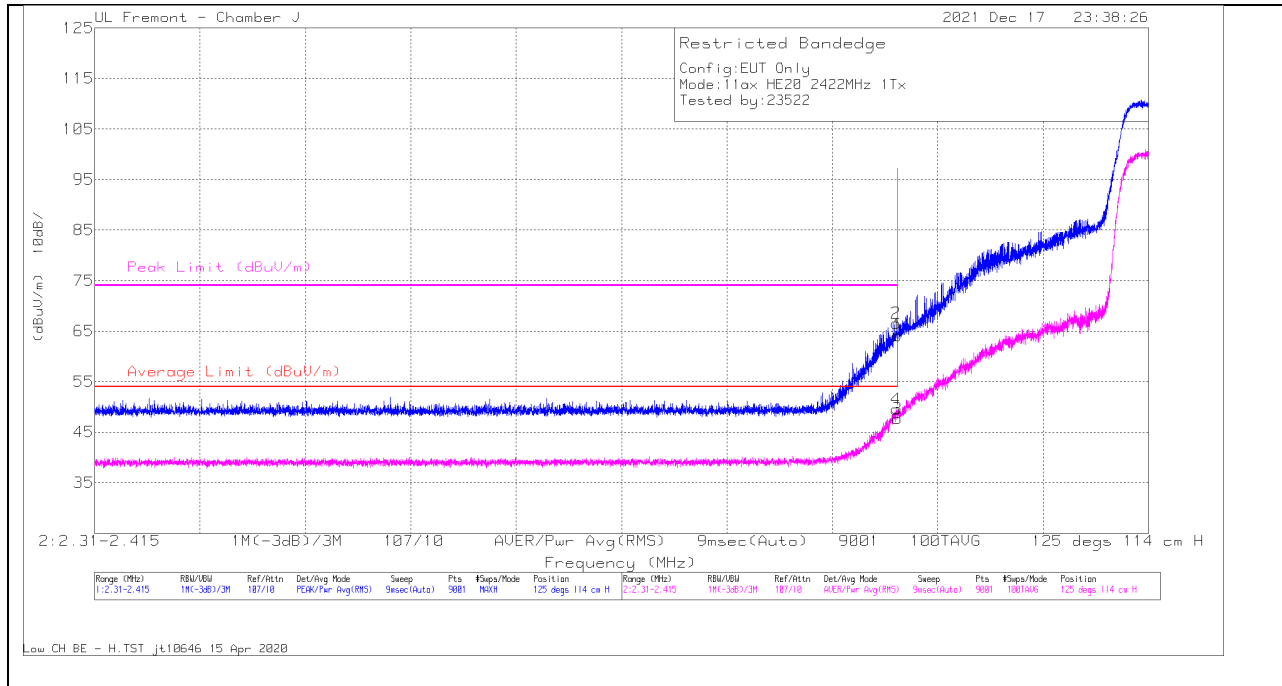


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	59.24	Pk	32	-27.1	0	64.14	-	-	74	-9.86	125	114	H
2	* 2389.83	61.69	Pk	32	-27.1	0	66.59	-	-	74	-7.41	125	114	H
3	* 2390	42.28	RMS	32	-27.1	.55	47.73	54	-6.27	-	-	125	114	H
4	* 2389.88	44.07	RMS	32	-27.1	.55	49.52	54	-4.48	-	-	125	114	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

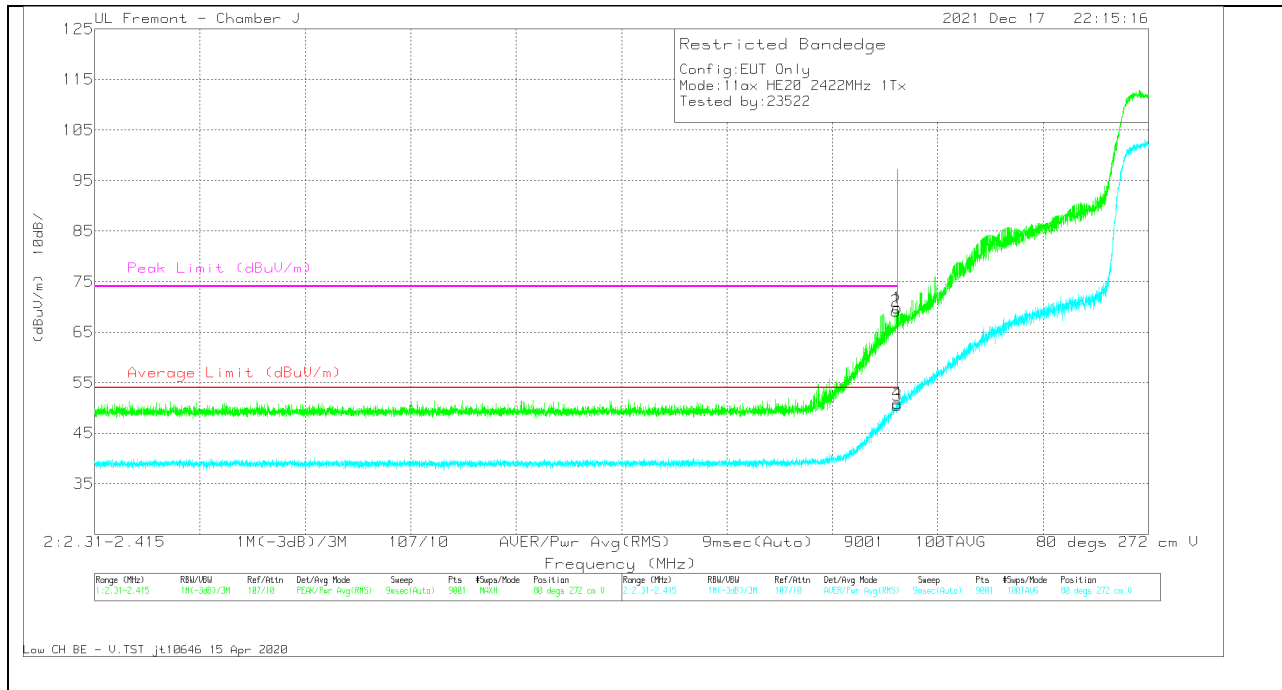


Marker	Frequen cy (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	64.88	Pk	32	-27.1	0	69.78	-	-	74	-4.22	80	272	V
2	* 2389.86	64.29	Pk	32	-27.1	0	69.19	-	-	74	-4.81	80	272	V
3	* 2390	45.09	RMS	32	-27.1	.55	50.54	54	-3.46	-	-	80	272	V
4	* 2389.97	45.48	RMS	32	-27.1	.55	50.93	54	-3.07	-	-	80	272	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

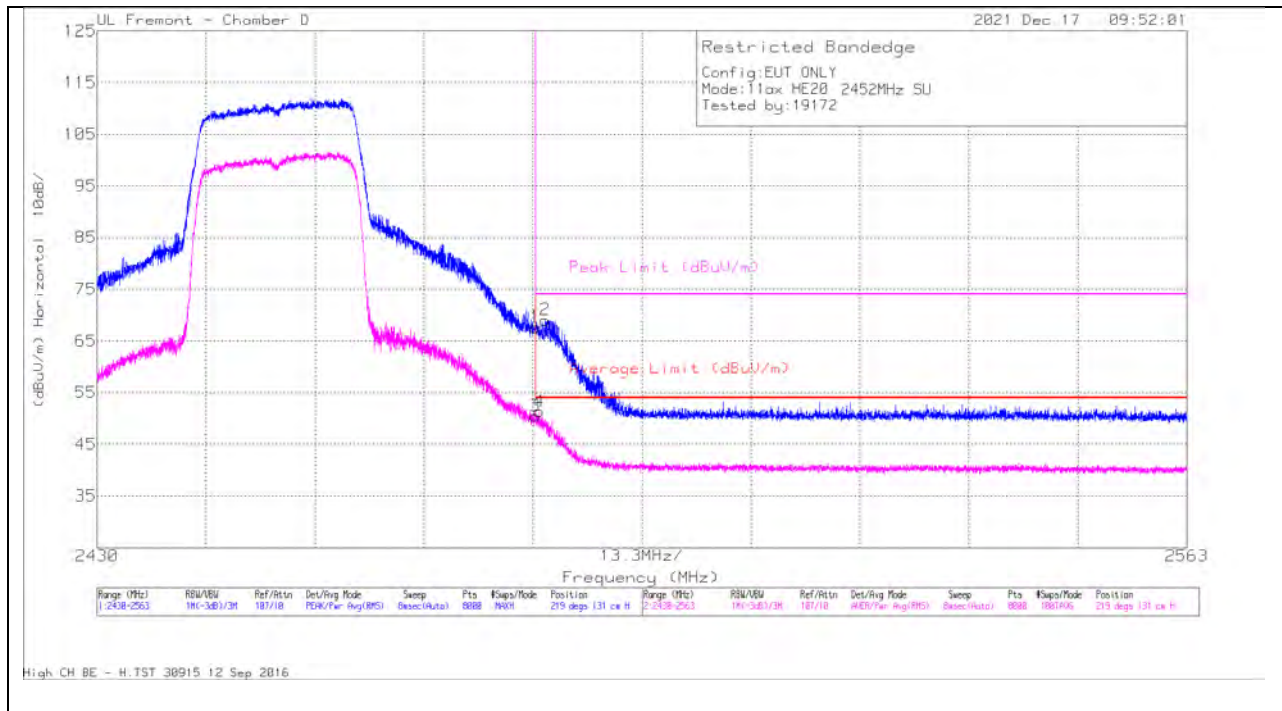


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	55.7	Pk	32.7	-20.7	0	67.7	-	-	74	-6.3	219	131	H
2	* 2484.70	57.04	Pk	32.7	-20.7	0	69.04	-	-	74	-4.96	219	131	H
3	* 2483.5	37.89	RMS	32.7	-20.7	.55	50.44	54	-3.56	-	-	219	131	H
4	* 2483.91	38.75	RMS	32.7	-20.7	.55	51.30	54	-2.70	-	-	219	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

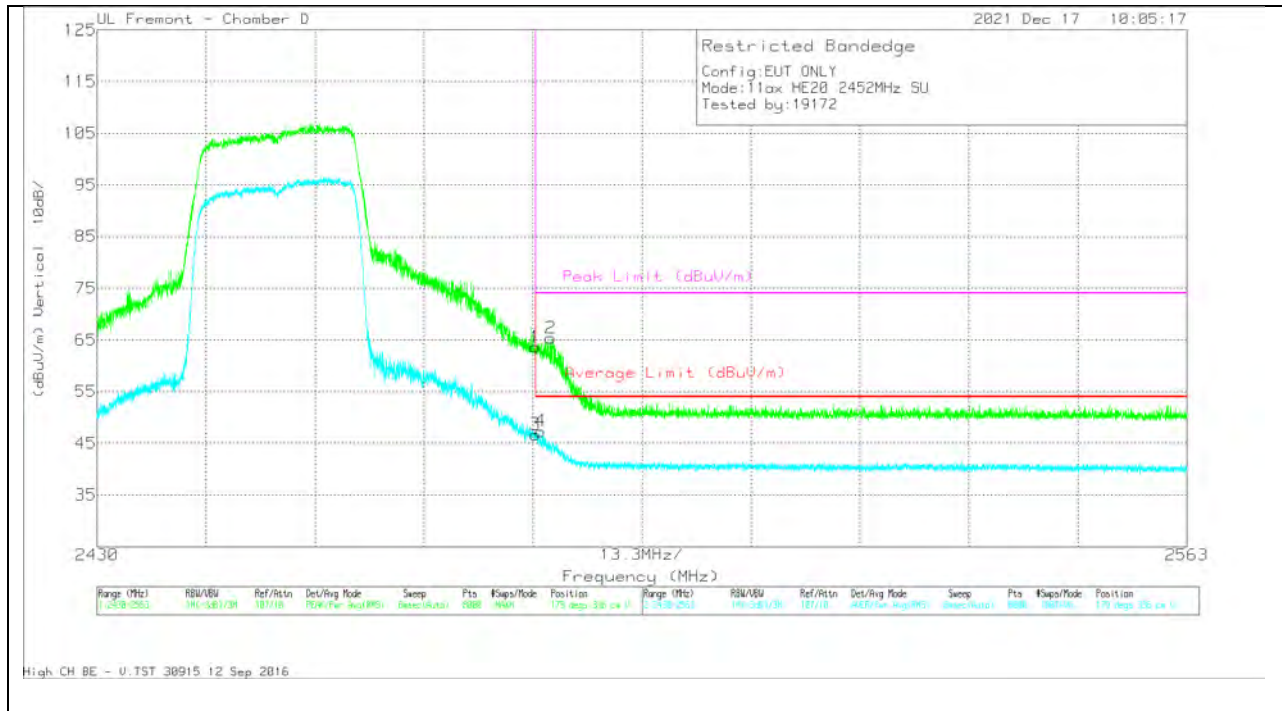


Marker	Frequen cy (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	51.66	Pk	32.7	-20.7	0	63.66	-	-	74	-10.34	179	336	V
2	* 2485.35	53.35	Pk	32.7	-20.7	0	65.35	-	-	74	-8.65	179	336	V
3	* 2483.5	34.15	RMS	32.7	-20.7	.55	46.70	54	-7.30	-	-	179	336	V
4	* 2484.10	34.77	RMS	32.7	-20.7	.55	47.32	54	-6.68	-	-	179	336	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

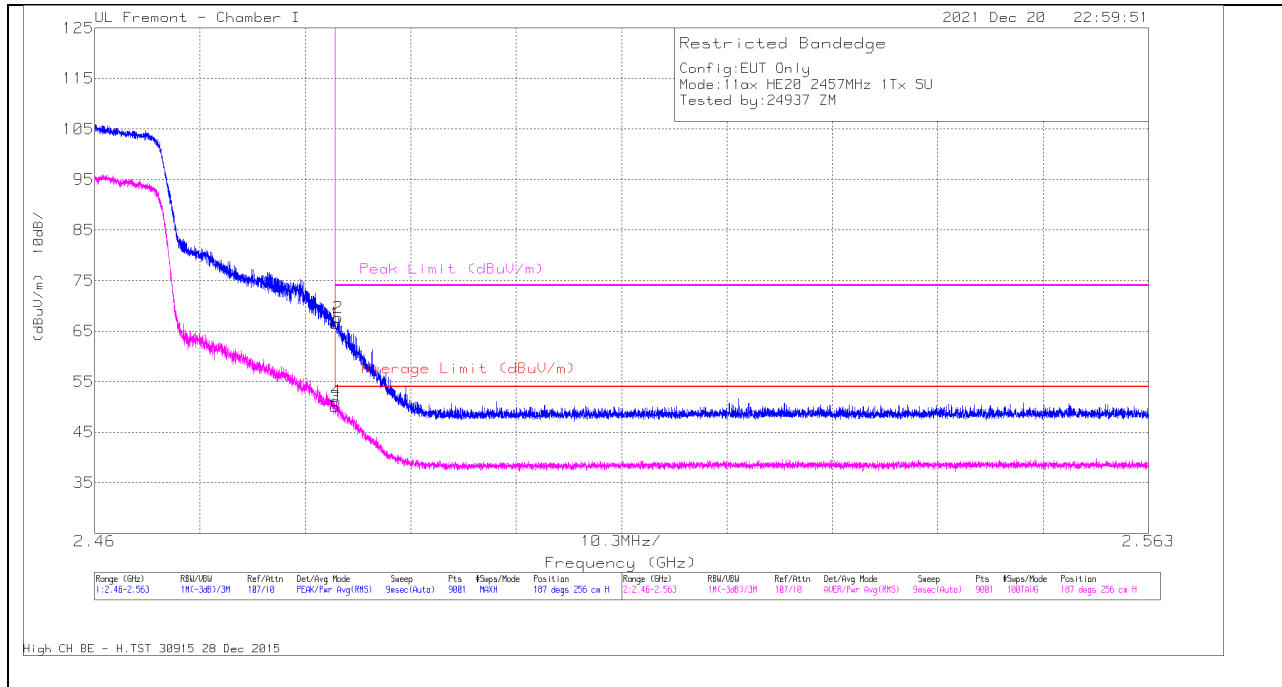


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb I/Filtr/PA d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.61	Pk	32.1	-19.2	0	66.51	-	-	74	-7.49	187	256	H
2	* 2.48378	54.76	Pk	32.1	-19.2	0	67.66	-	-	74	-6.34	187	256	H
3	* 2.4835	36.62	RMS	32.1	-19.2	.55	50.07	54	-3.93	-	-	187	256	H
4	* 2.48361	37.7	RMS	32.1	-19.2	.55	51.15	54	-2.85	-	-	187	256	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

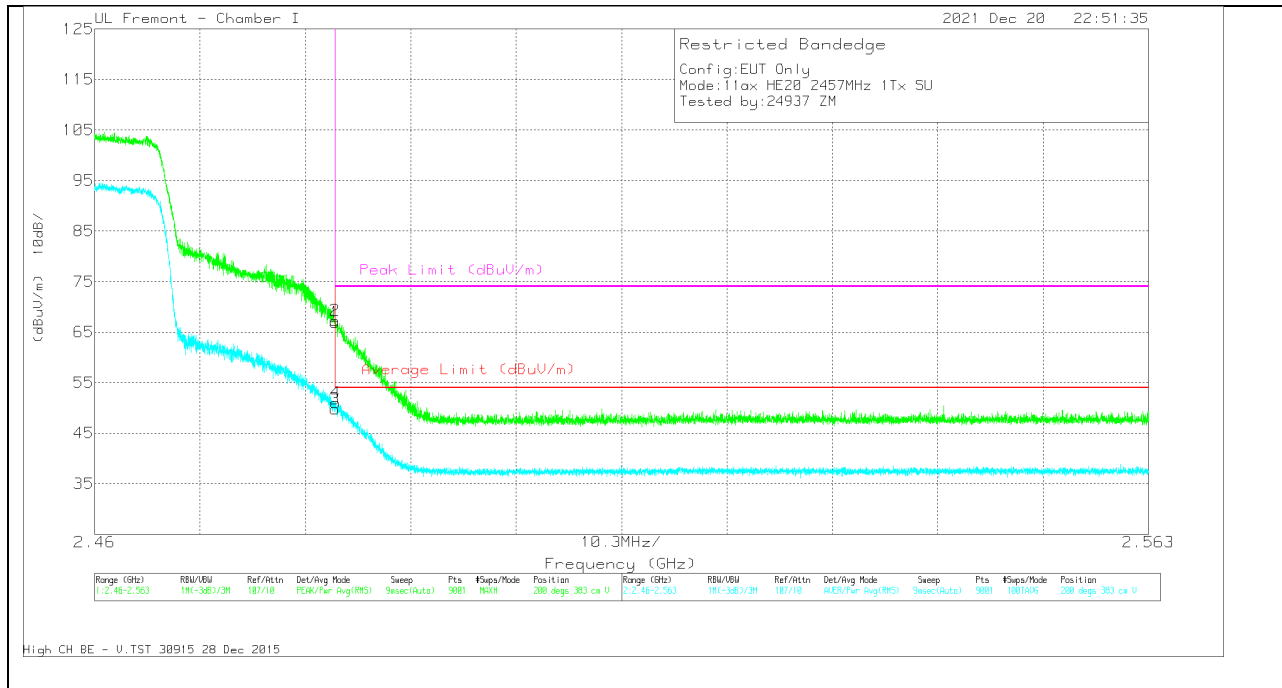


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.98	Pk	32.1	-19.2	0	66.88	-	-	74	-7.12	200	383	V
2	* 2.48352	54.35	Pk	32.1	-19.2	0	67.25	-	-	74	-6.75	200	383	V
3	* 2.4835	36.38	RMS	32.1	-19.2	.55	49.83	54	-4.17	-	-	200	383	V
4	* 2.48356	37.58	RMS	32.1	-19.2	.55	51.03	54	-2.97	-	-	200	383	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

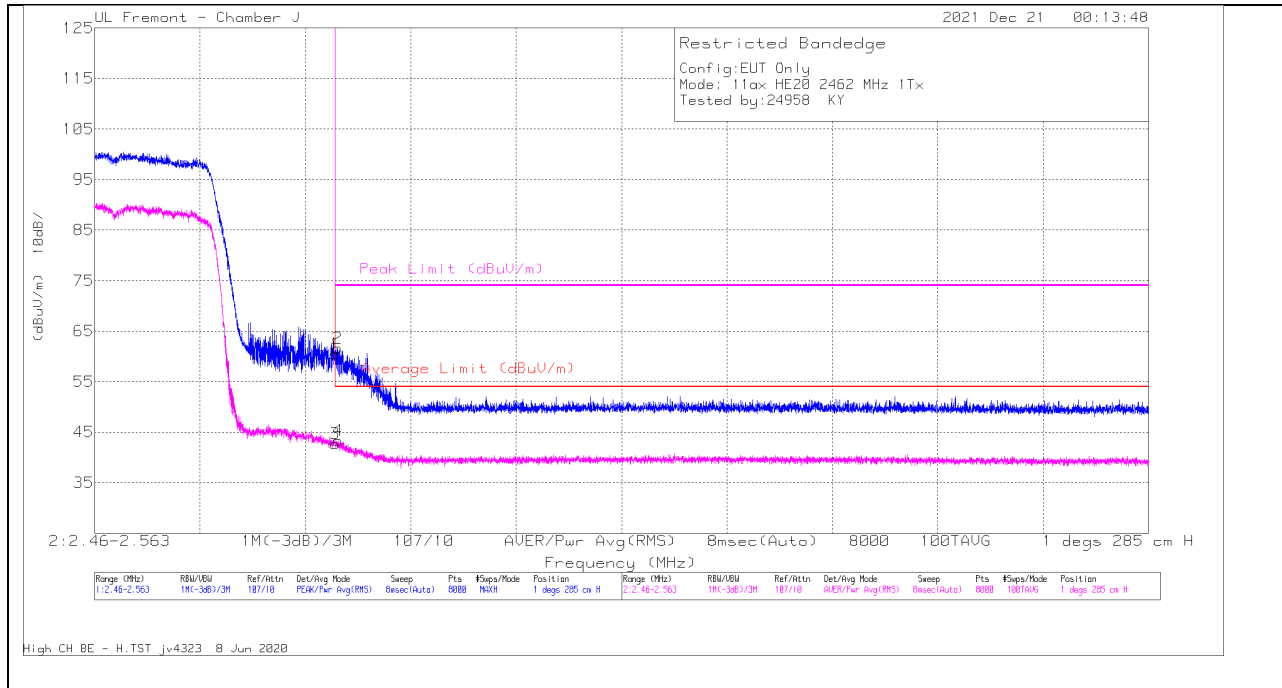


Marker	Frequen- cy (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	44.1	Pk	32.4	-16	0	60.5	-	-	74	-13.5	1	285	H
2	* 2483.72	45.22	Pk	32.4	-16	0	61.62	-	-	74	-12.38	1	285	H
3	* 2483.5	25.76	RMS	32.4	-16	.55	42.71	54	-11.29	-	-	1	285	H
4	* 2483.79	26.43	RMS	32.4	-16	.55	43.38	54	-10.62	-	-	1	285	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

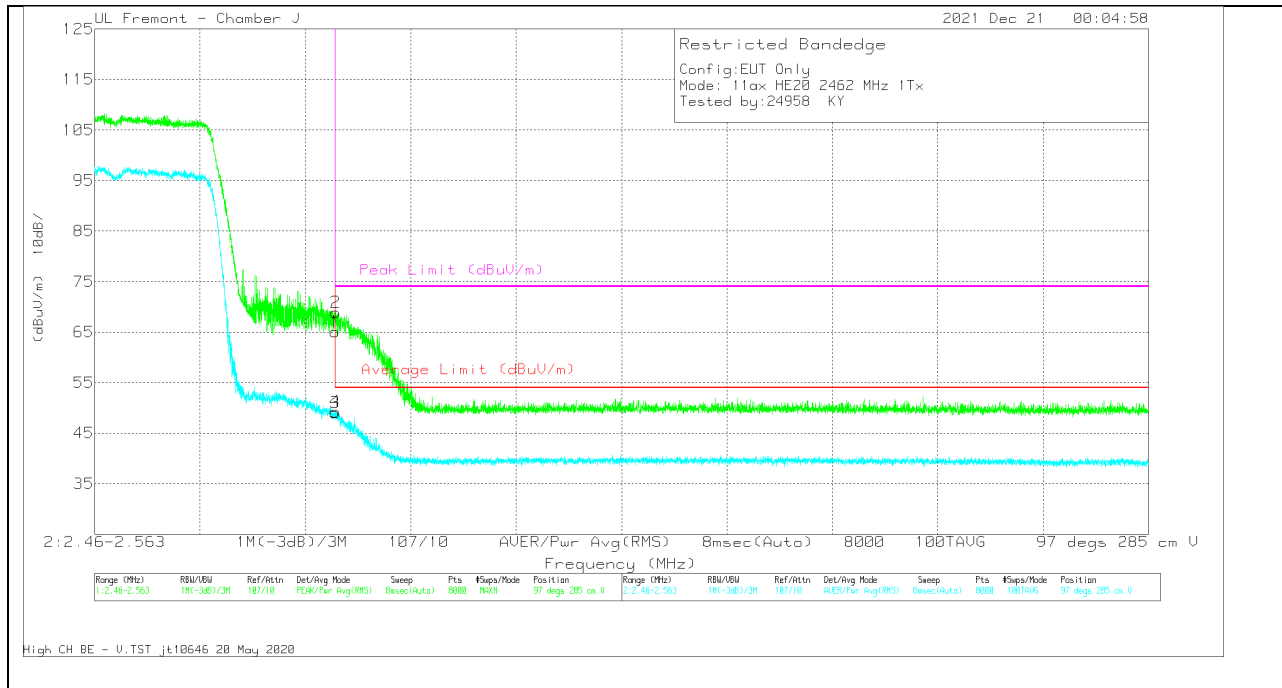


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	48.61	Pk	32.4	-16	0	65.01	-	-	74	-8.99	97	285	V
2	* 2483.55	52.48	Pk	32.4	-16	0	68.88	-	-	74	-5.12	97	285	V
3	* 2483.5	32.14	RMS	32.4	-16	.55	49.09	54	-4.91	-	-	97	285	V
4	* 2483.53	32.3	RMS	32.4	-16	.55	49.25	54	-4.75	-	-	97	285	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

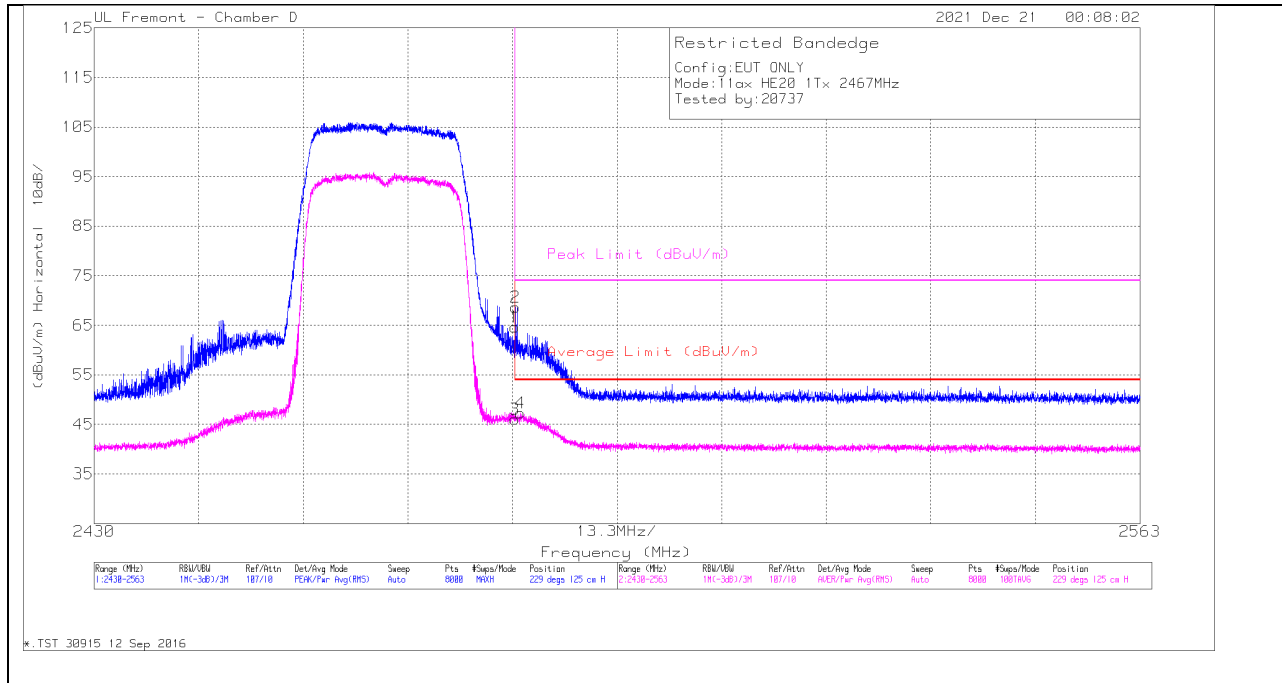

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	52.68	Pk	32.7	-20.7	0	64.68	-	-	74	-9.32	229	125	H
2	* 2483.59	56.64	Pk	32.7	-20.7	0	68.64	-	-	74	-5.36	229	125	H
3	* 2483.5	33.48	RMS	32.7	-20.7	.55	46.03	54	-7.97	-	-	229	125	H
4	* 2484.17	34.71	RMS	32.7	-20.7	.55	47.26	54	-6.74	-	-	229	125	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

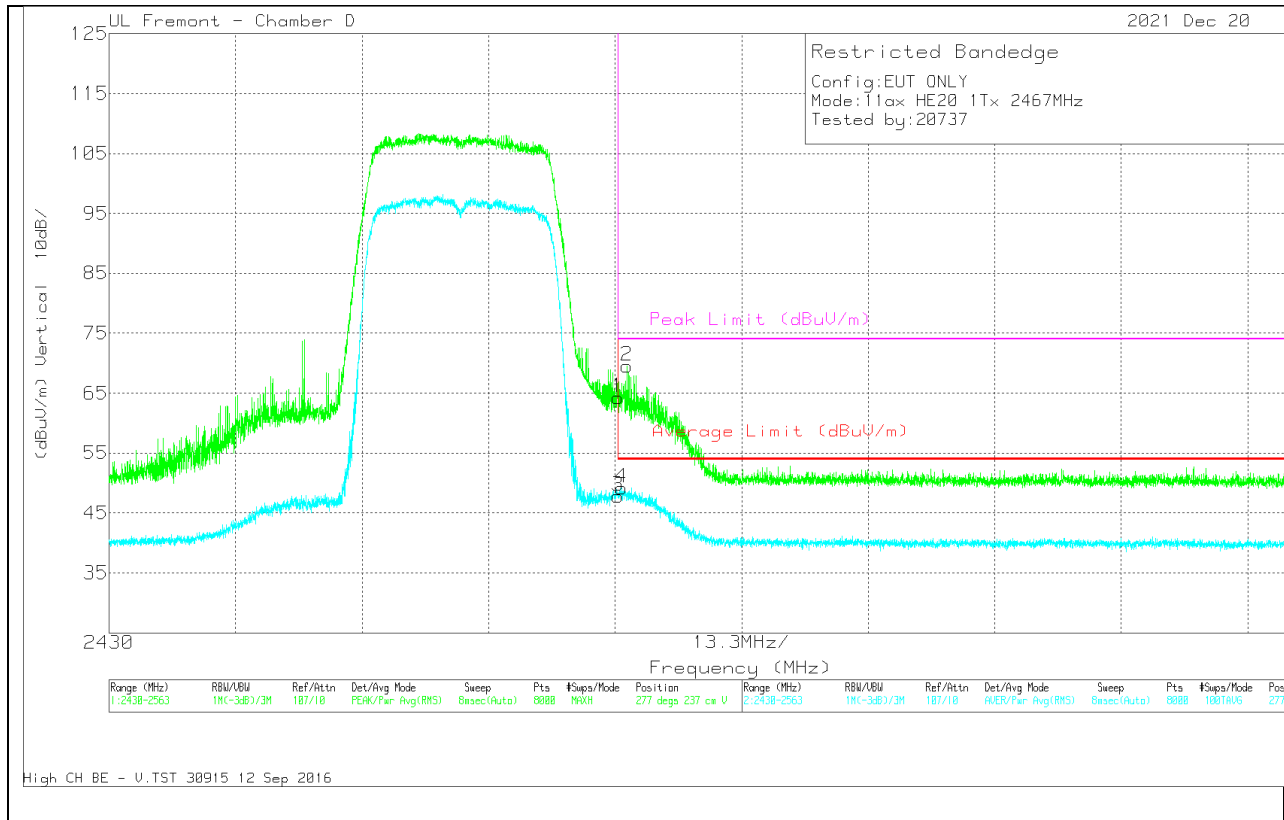


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	52.2	Pk	32.7	-20.7	0	64.2	-	-	74	-9.8	277	237	V
2	* 2484.42	57.52	Pk	32.7	-20.7	0	69.52	-	-	74	-4.48	277	237	V
3	* 2483.5	35.29	RMS	32.7	-20.7	.55	47.84	54	-6.16	-	-	277	237	V
4	* 2483.89	36.64	RMS	32.7	-20.7	.55	49.19	54	-4.81	-	-	277	237	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

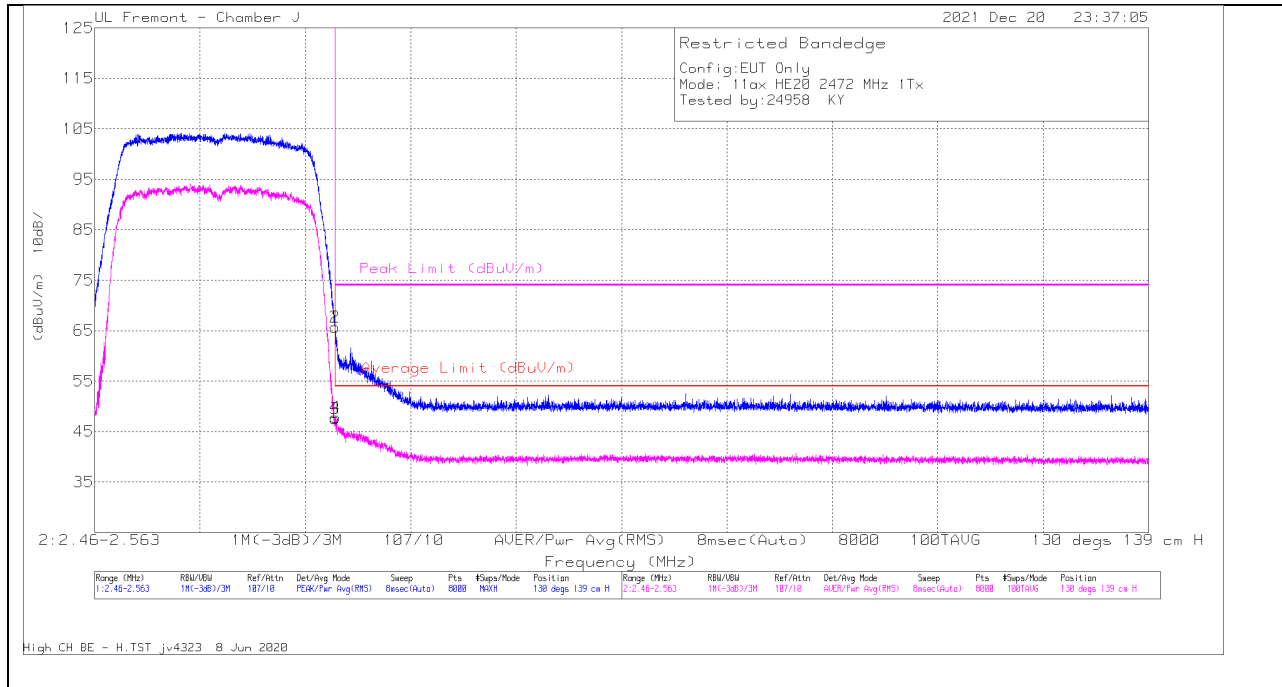

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	49.28	Pk	32.4	-16	0	65.68	-	-	74	-8.32	130	139	H
2	* 2483.50	49.27	Pk	32.4	-16	0	65.67	-	-	74	-8.33	130	139	H
3	* 2483.5	30.67	RMS	32.4	-16	.55	47.62	54	-6.38	-	-	130	139	H
4	* 2483.53	30.9	RMS	32.4	-16	.55	47.85	54	-6.15	-	-	130	139	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

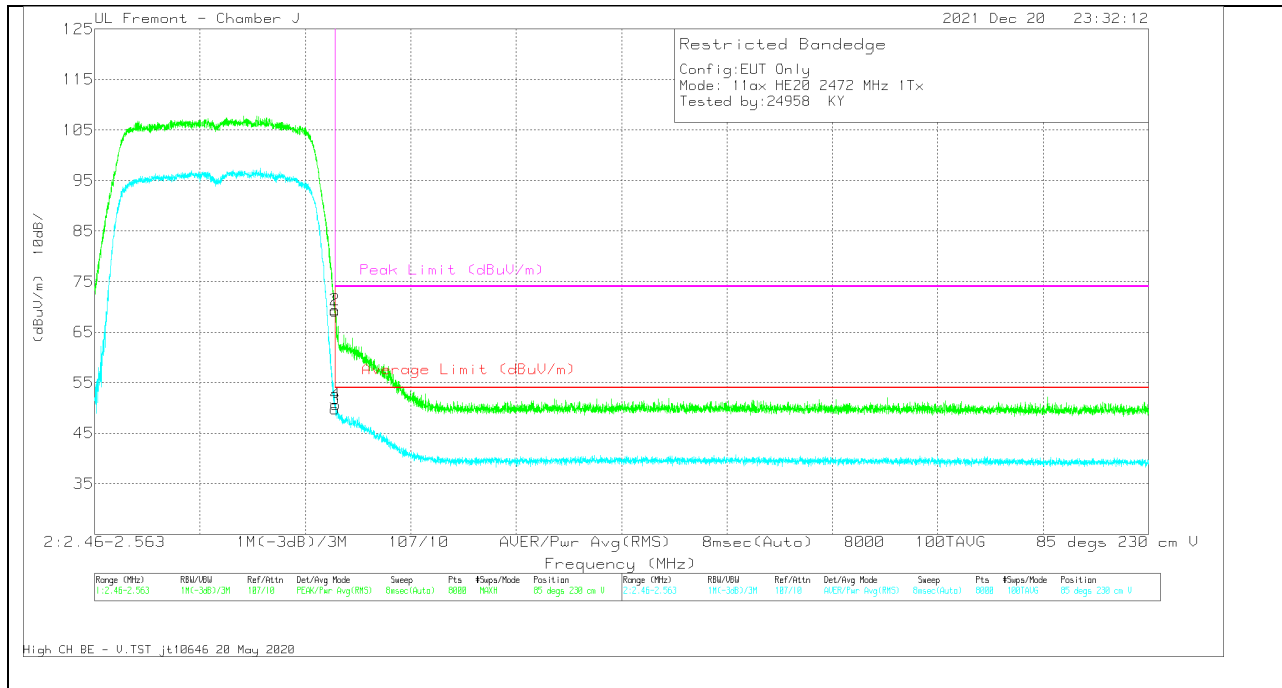

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Marg in (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	52.79	Pk	32.4	-16	0	69.19	-	-	74	-4.81	85	230	V
2	* 2483.51	53.04	Pk	32.4	-16	0	69.44	-	-	74	-4.56	85	230	V
3	* 2483.5	32.88	RMS	32.4	-16	.55	49.83	54	-4.17	-	-	85	230	V
4	* 2483.57	33.7	RMS	32.4	-16	.55	50.65	54	-3.35	-	-	85	230	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

10.1.7. 802.11ax HE20 OFDMA MODE IN THE 2.4 GHz BAND

2TX ANT 2 + ANT 3 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

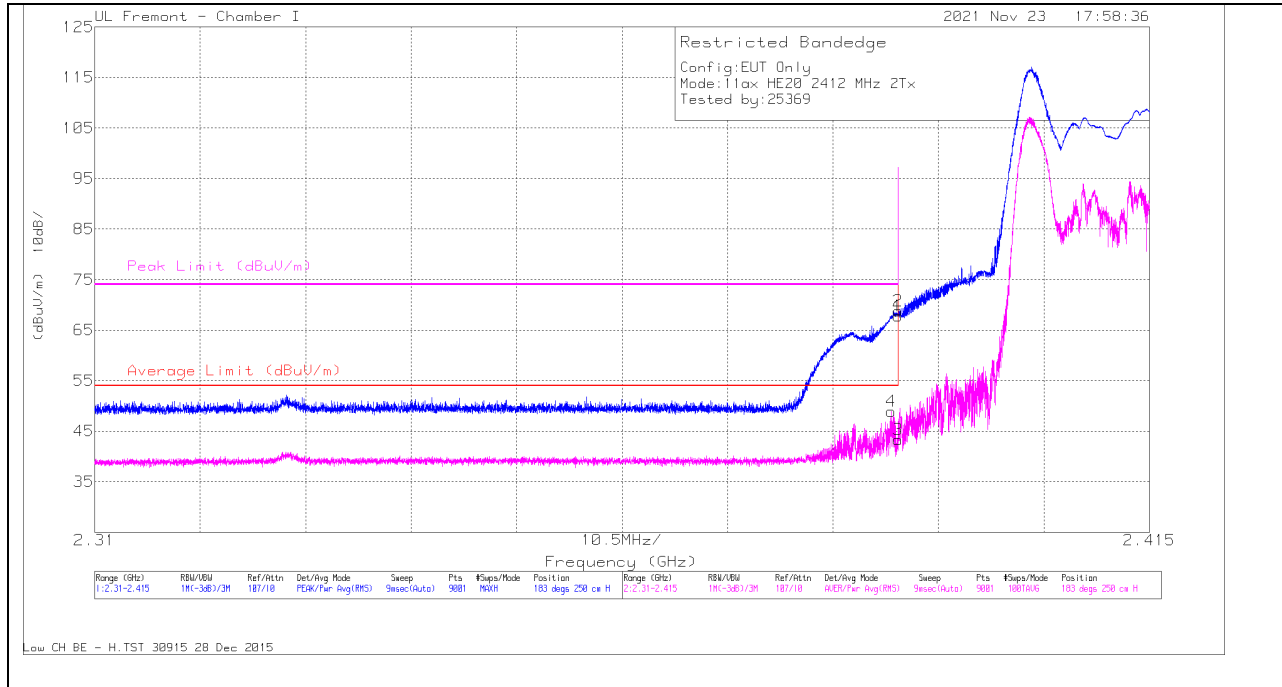


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.73	Pk	31.9	-18.8	0	67.83	-	-	74	-6.17	183	250	H
2	* 2.38998	55.72	Pk	31.9	-18.8	0	68.82	-	-	74	-5.18	183	250	H
3	* 2.39	29.7	RMS	31.9	-18.8	.61	43.41	54	-10.59	-	-	183	250	H
4	* 2.3893	35.36	RMS	31.9	-18.8	.61	49.07	54	-4.93	-	-	183	250	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

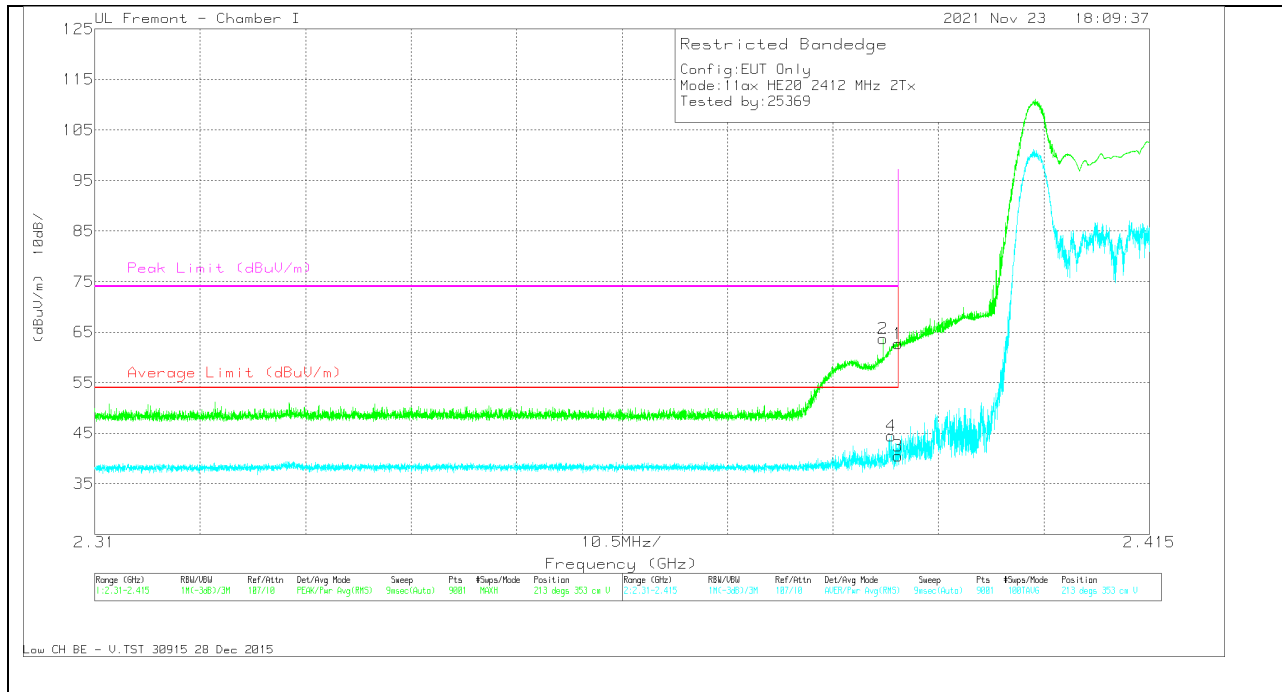

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.6	Pk	31.9	-18.8	0	62.7	-	-	74	-11.3	213	353	V
2	* 2.38847	50.57	Pk	31.9	-18.8	0	63.67	-	-	74	-10.33	213	353	V
3	* 2.39	26.9	RMS	31.9	-18.8	.61	40.61	54	-13.39	-	-	213	353	V
4	* 2.38929	30.81	RMS	31.9	-18.8	.61	44.52	54	-9.48	-	-	213	353	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

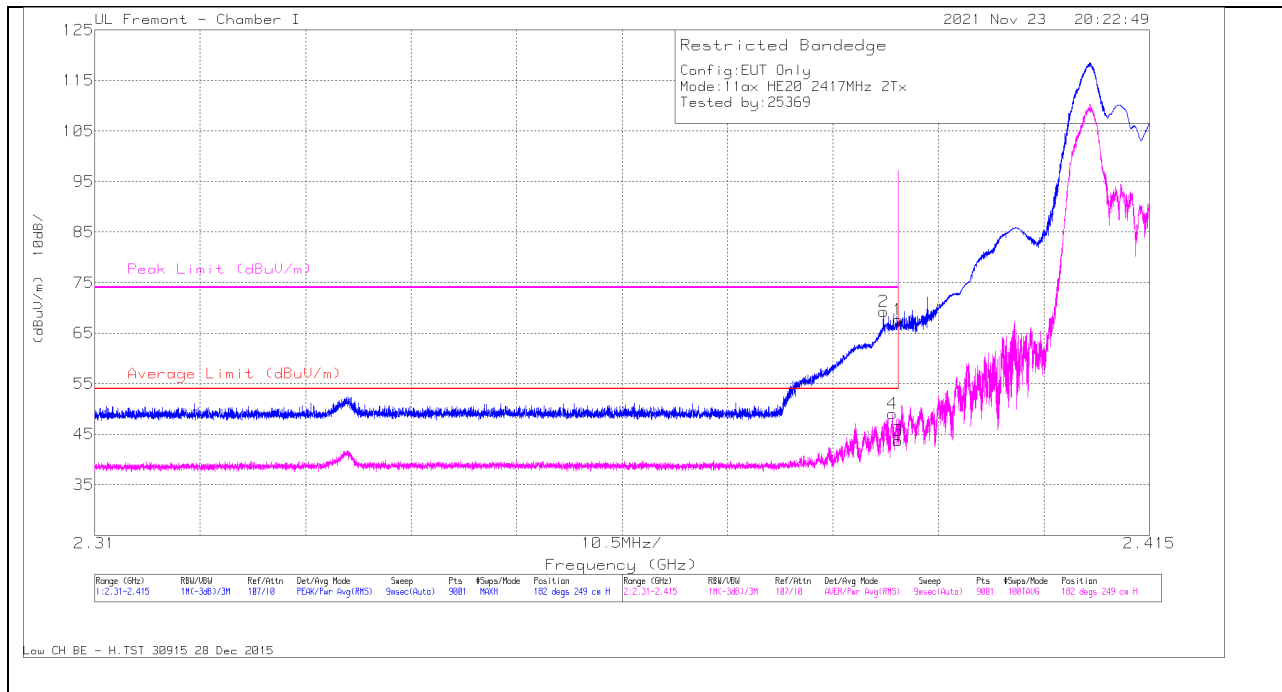

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.58	Pk	31.9	-18.8	0	67.68	-	-	74	-6.32	182	249	H
2	* 2.38852	56.16	Pk	31.9	-18.8	0	69.26	-	-	74	-4.74	182	249	H
3	* 2.39	30.07	RMS	31.9	-18.8	.61	43.78	54	-10.22	-	-	182	249	H
4	* 2.38943	35.47	RMS	31.9	-18.8	.61	49.18	54	-4.82	-	-	182	249	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

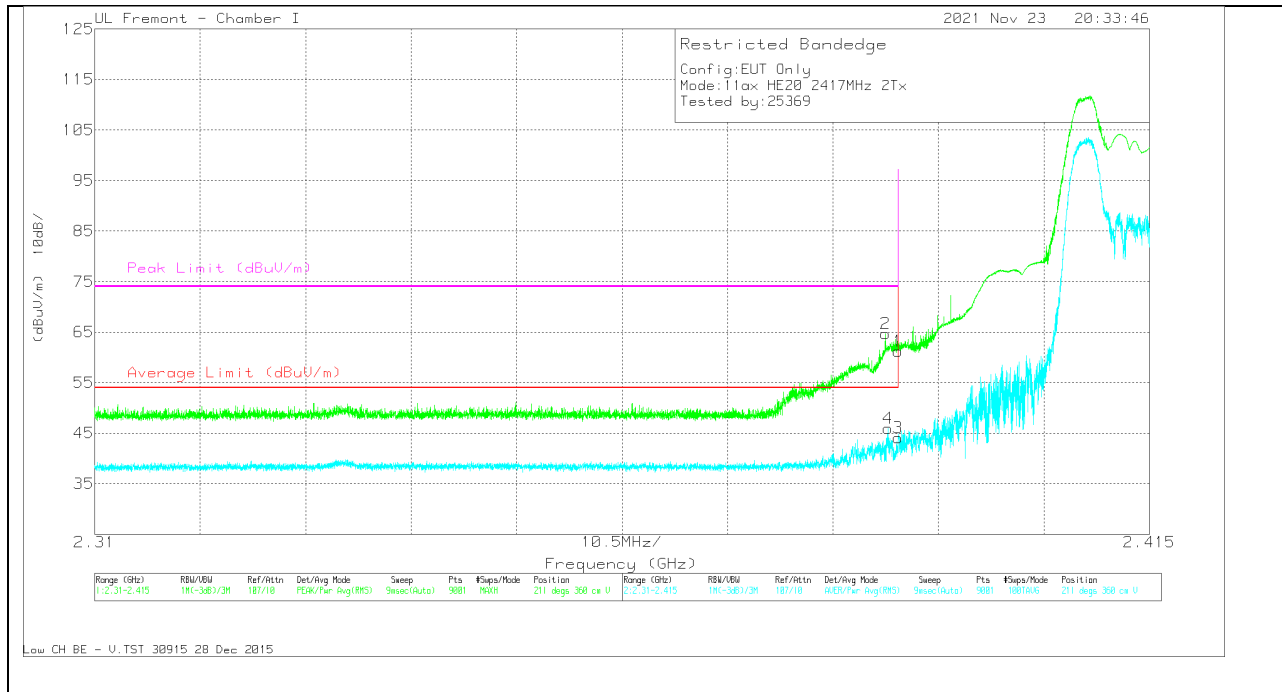


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.13	Pk	31.9	-18.8	0	61.23	-	-	74	-12.77	211	360	V
2	* 2.3887	51.6	Pk	31.9	-18.8	0	64.7	-	-	74	-9.3	211	360	V
3	* 2.39	30.46	RMS	31.9	-18.8	.61	44.17	54	-9.83	-	-	211	360	V
4	* 2.38896	32.29	RMS	31.9	-18.8	.61	46.00	54	-8.00	-	-	211	360	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

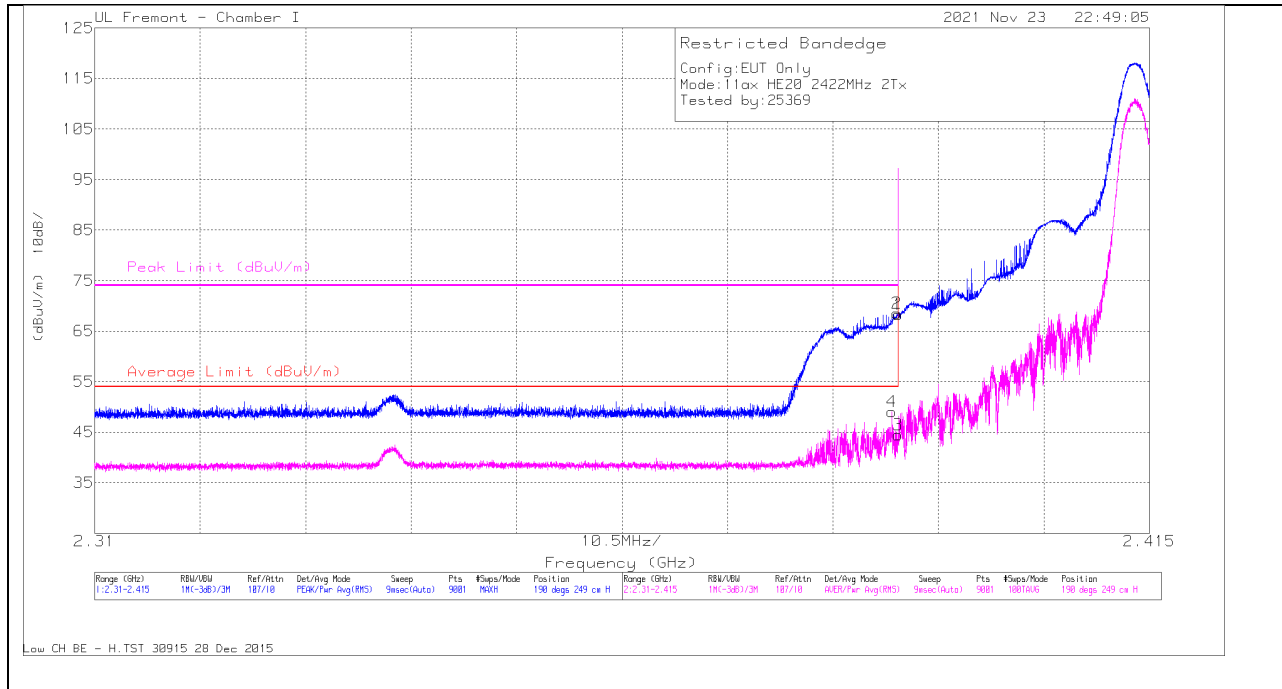

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.15	Pk	31.9	-18.8	0	68.25	-	-	74	-5.75	190	249	H
2	* 2.38987	55.42	Pk	31.9	-18.8	0	68.52	-	-	74	-5.48	190	249	H
3	* 2.39	30.87	RMS	31.9	-18.8	.61	44.58	54	-9.42	-	-	190	249	H
4	* 2.38937	35.38	RMS	31.9	-18.8	.61	49.09	54	-4.91	-	-	190	249	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

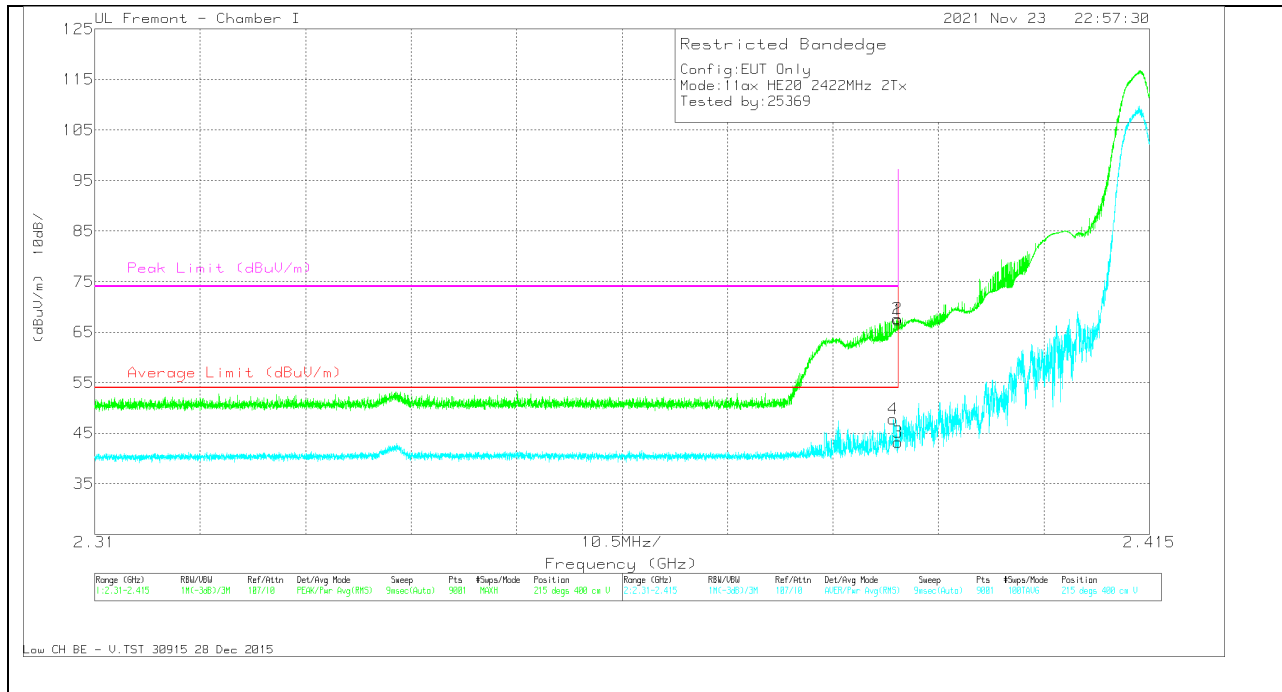

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.34	Pk	31.9	-18.8	0	67.44	-	-	74	-6.56	215	400	V
2	* 2.3899	54.59	Pk	31.9	-18.8	0	67.69	-	-	74	-6.31	215	400	V
3	* 2.39	29.6	RMS	31.9	-18.8	.61	43.31	54	-10.69	-	-	215	400	V
4	* 2.3895	34.21	RMS	31.9	-18.8	.61	47.92	54	-6.08	-	-	215	400	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 09)


HORIZONTAL RESULT

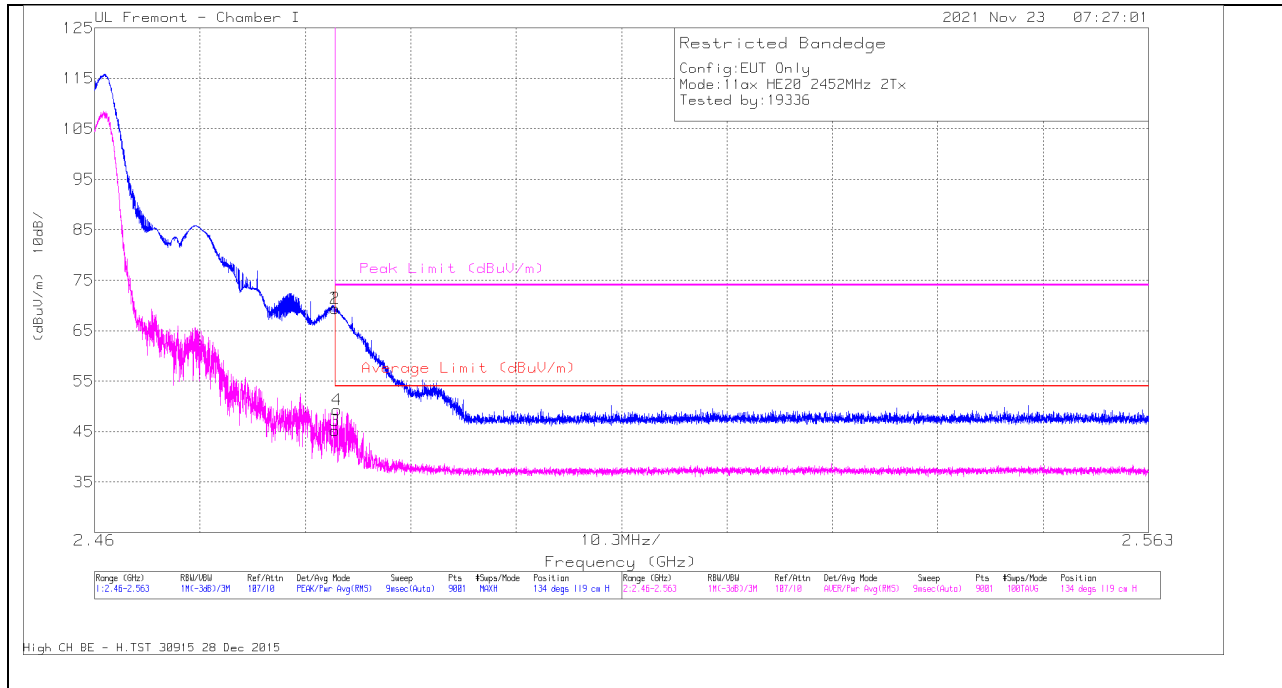

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	56.54	Pk	32.1	-19.2	0	69.44	-	-	74	-4.56	134	119	H
2	* 2.48351	56.49	Pk	32.1	-19.2	0	69.39	-	-	74	-4.61	134	119	H
3	* 2.4835	31.83	RMS	32.1	-19.2	.61	45.34	54	-8.64	-	-	134	119	H
4	* 2.48370	35.91	RMS	32.1	-19.2	.61	49.42	54	-4.58	-	-	134	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

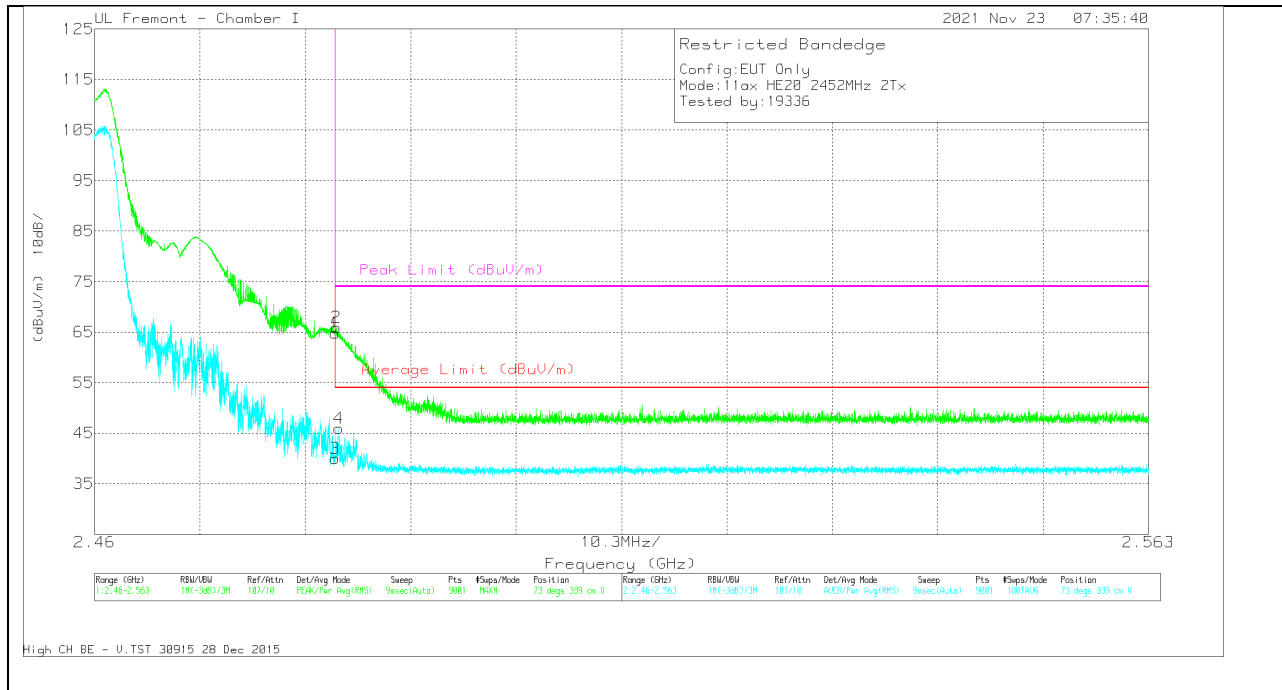


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	51.91	Pk	32.1	-19.2	0	64.81	-	-	74	-9.19	73	339	V
2	* 2.4836	52.98	Pk	32.1	-19.2	0	65.88	-	-	74	-8.12	73	339	V
3	* 2.4835	26.55	RMS	32.1	-19.2	.61	40.06	54	-13.92	-	-	73	339	V
4	* 2.4839	32.58	RMS	32.1	-19.2	.61	46.09	54	-7.91	-	-	73	339	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

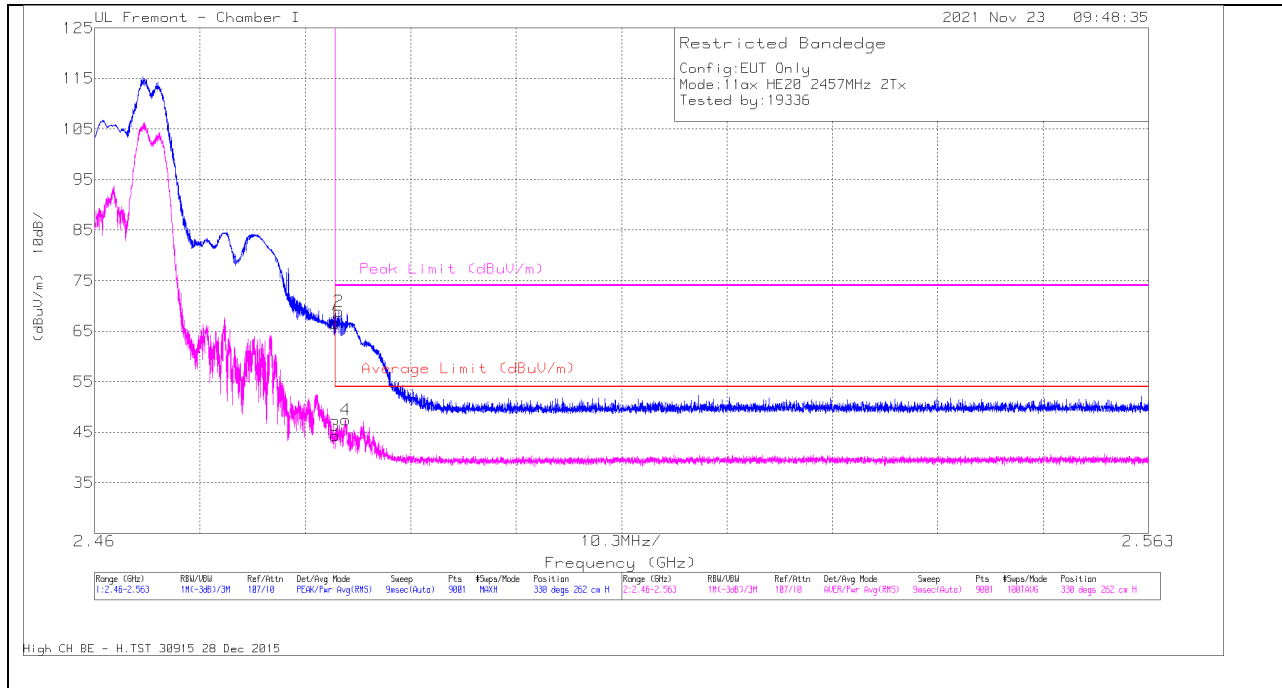


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.68	Pk	32.1	-19.2	0	66.58	-	-	74	-7.42	330	262	H
2	* 2.48384	56.02	Pk	32.1	-19.2	0	68.92	-	-	74	-5.08	330	262	H
3	* 2.4835	30.92	RMS	32.1	-19.2	.61	44.43	54	-9.57	-	-	330	262	H
4	* 2.48451	34.06	RMS	32.1	-19.2	.61	47.57	54	-6.43	-	-	330	262	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

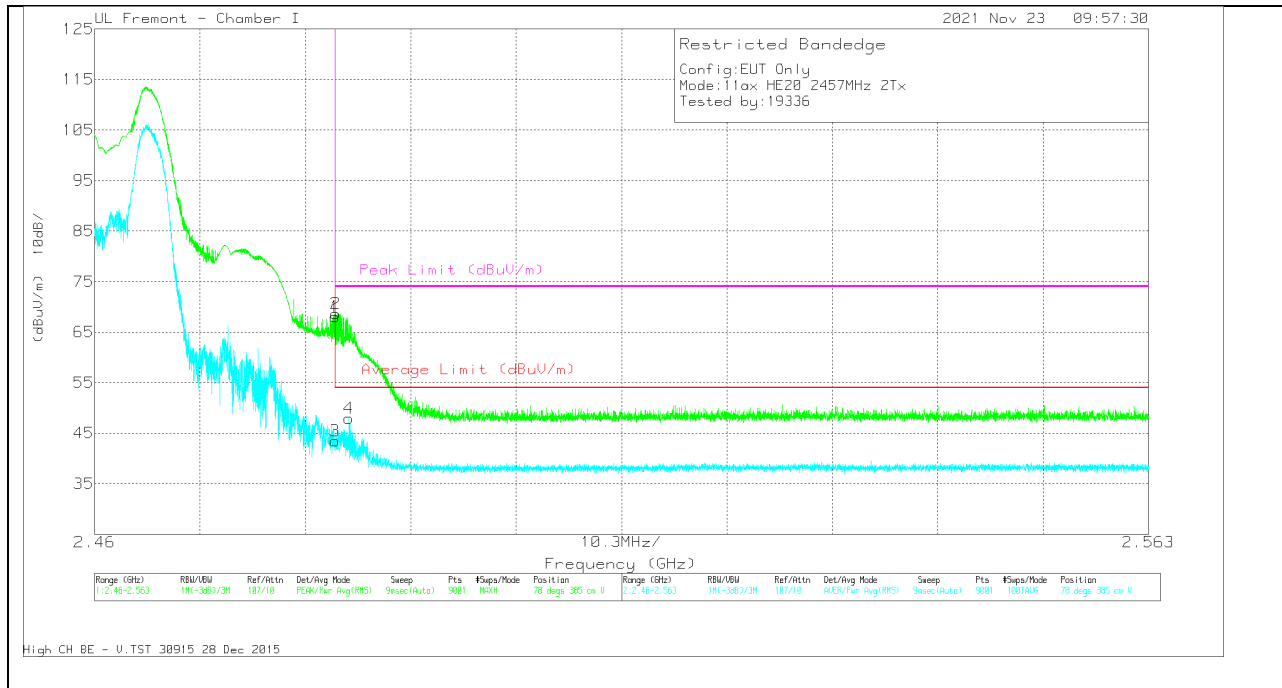

Marker	Frequen- cy (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb/ Filtr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	55.12	Pk	32.1	-19.2	0	68.02	-	-	74	-5.98	78	385	V
2	* 2.48358	55.73	Pk	32.1	-19.2	0	68.63	-	-	74	-5.37	78	385	V
3	* 2.4835	30.08	RMS	32.1	-19.2	.61	43.59	54	-10.41	-	-	78	385	V
4	* 2.48486	34.52	RMS	32.1	-19.2	.61	48.02	54	-5.98	-	-	78	385	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

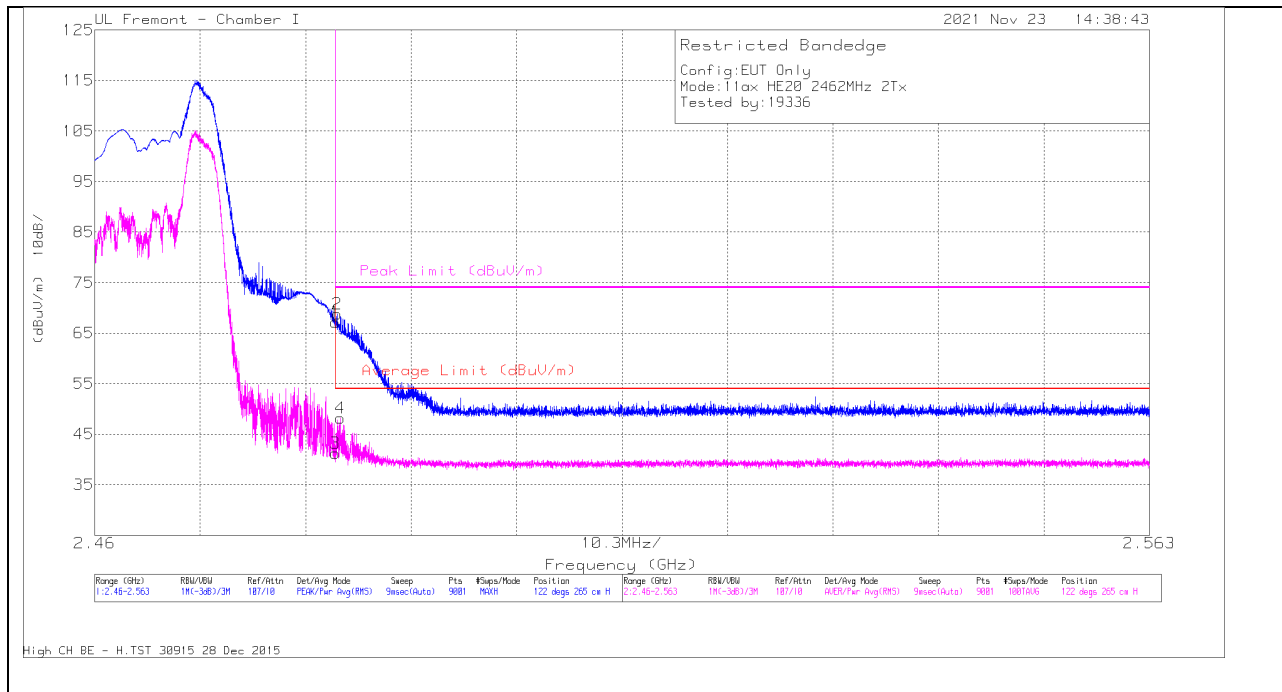


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.25	Pk	32.1	-19.2	0	67.15	-	-	74	-6.85	122	265	H
2	* 2.48366	55.93	Pk	32.1	-19.2	0	68.83	-	-	74	-5.17	122	265	H
3	* 2.4835	27.82	RMS	32.1	-19.2	.61	41.43	54	-12.57	-	-	122	265	H
4	* 2.48399	34.75	RMS	32.1	-19.2	.61	48.26	54	-5.74	-	-	122	265	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

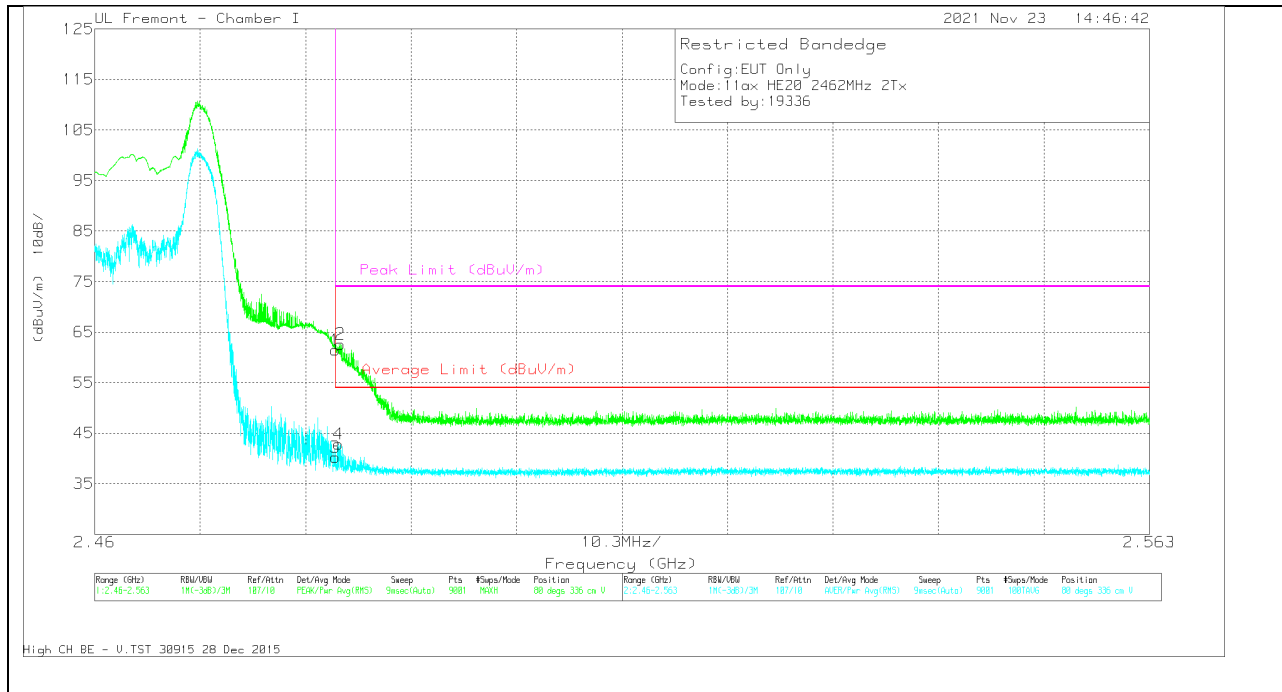

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	48.62	Pk	32.1	-19.2	0	61.52	-	-	74	-12.48	80	336	V
2	* 2.48399	49.74	Pk	32.1	-19.2	0	62.64	-	-	74	-11.36	80	336	V
3	* 2.4835	26.76	RMS	32.1	-19.2	.61	40.27	54	-13.73	-	-	80	336	V
4	* 2.48378	29.37	RMS	32.1	-19.2	.61	42.88	54	-11.12	-	-	80	336	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

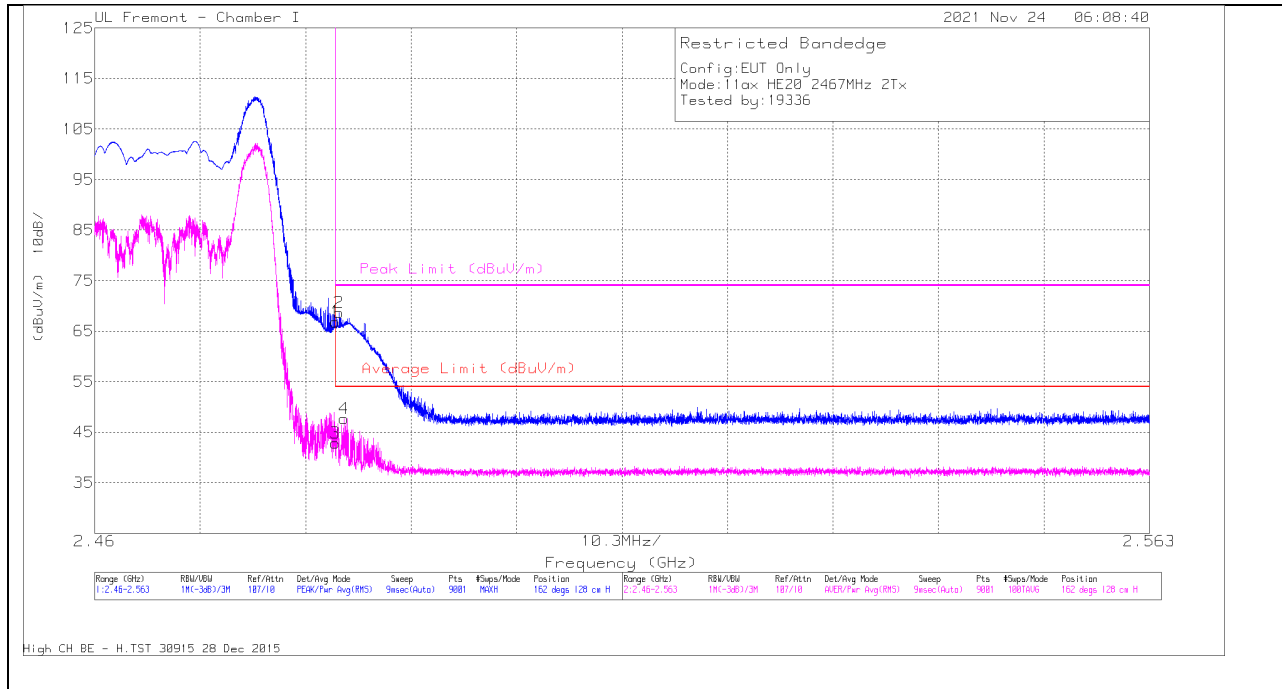

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.87	Pk	32.1	-19.2	0	66.77	-	-	74	-7.23	162	128	H
2	* 2.48387	55.8	Pk	32.1	-19.2	0	68.7	-	-	74	-5.3	162	128	H
3	* 2.4835	29.42	RMS	32.1	-19.2	.61	42.93	54	-11.07	-	-	162	128	H
4	* 2.48436	34.21	RMS	32.1	-19.2	.61	47.72	54	-6.28	-	-	162	128	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

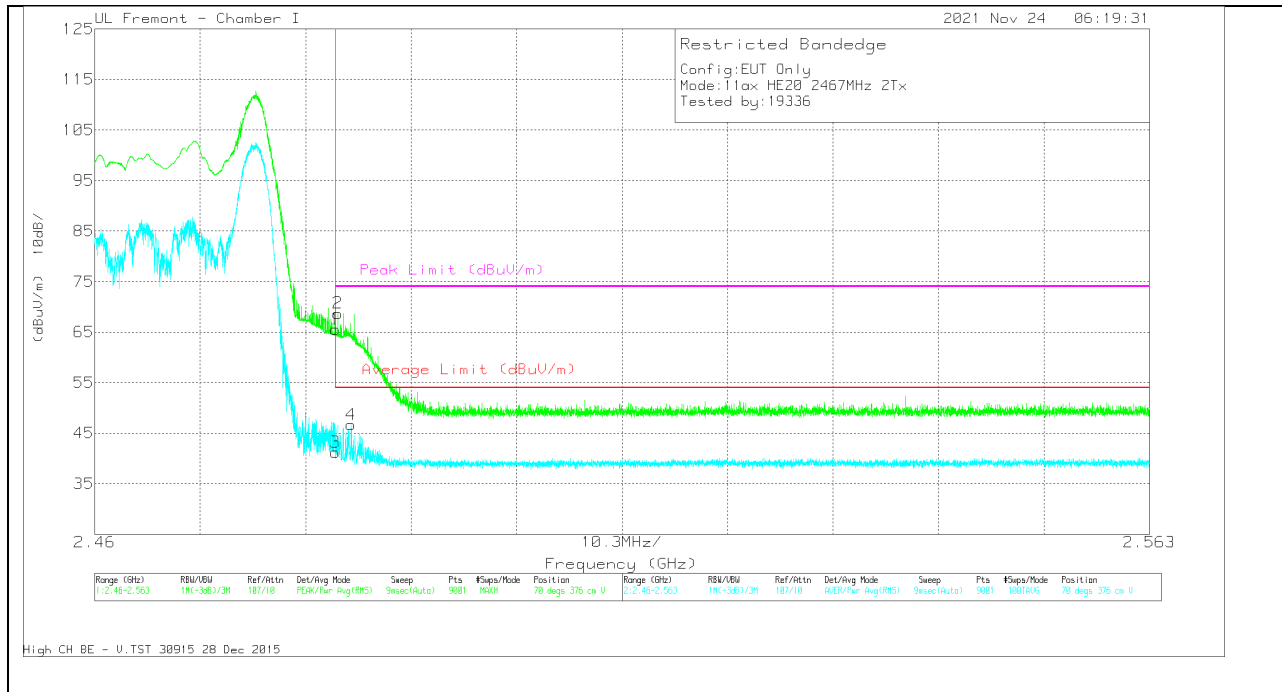

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	52.66	Pk	32.1	-19.2	0	65.56	-	-	74	-8.44	70	376	V
2	* 2.4837	55.83	Pk	32.1	-19.2	0	68.73	-	-	74	-5.27	70	376	V
3	* 2.4835	27.77	RMS	32.1	-19.2	.61	41.28	54	-12.72	-	-	70	376	V
4	* 2.4851	33.3	RMS	32.1	-19.2	.61	46.81	54	-7.19	-	-	70	376	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

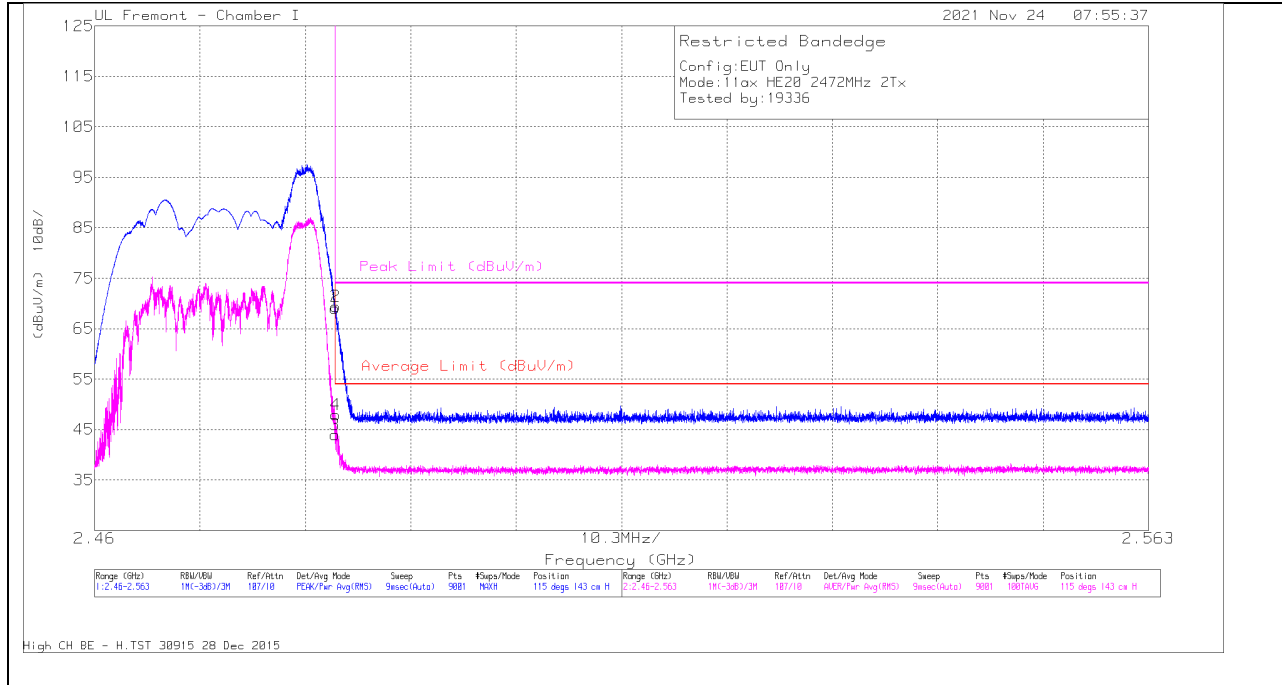

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb I/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	56.17	Pk	32.1	-19.2	0	69.07	-	-	74	-4.93	115	143	H
2	* 2.4836	56.53	Pk	32.1	-19.2	0	69.43	-	-	74	-4.57	115	143	H
3	* 2.4835	30.53	RMS	32.1	-19.2	.61	44.04	54	-9.96	-	-	115	143	H
4	* 2.4835	34.51	RMS	32.1	-19.2	.61	48.02	54	-5.98	-	-	115	143	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

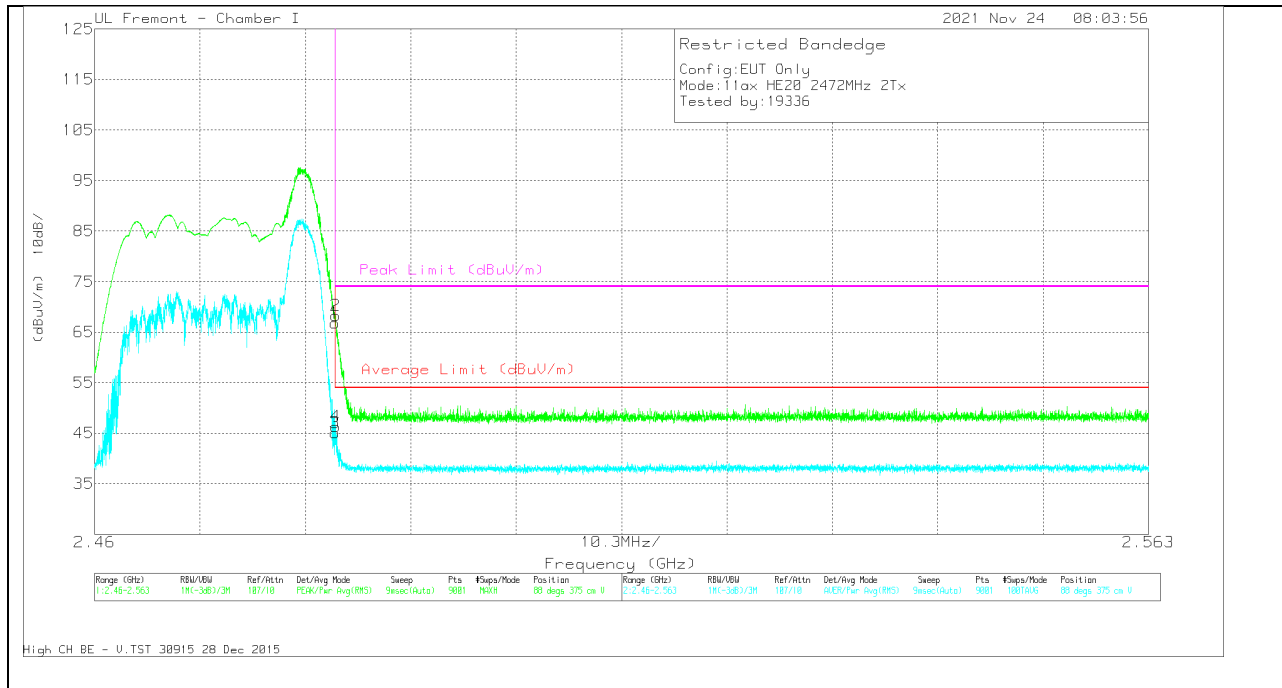

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.94	Pk	32.1	-19.2	0	66.84	-	-	74	-7.16	88	375	V
2	* 2.48353	55.37	Pk	32.1	-19.2	0	68.27	-	-	74	-5.73	88	375	V
3	* 2.4835	31.66	RMS	32.1	-19.2	.61	45.17	54	-8.83	-	-	88	375	V
4	* 2.48354	32.94	RMS	32.1	-19.2	.61	46.45	54	-7.55	-	-	88	375	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

