



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
SMARTPHONE

**FCC ID: BCG-E8141A (Parent Model)
BCG-E8154A, BCG-E8155A, BCG-E8156A (Variant Models)
Model Name: A2651 (Parent Model)
A2893, A2894, A2895, A2896 (Variant Models)**

**Report Number: 14040866-S10V3
Issue Date: 6/27/2023**

Prepared for
**APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014-2084**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



Revision History

Rev.	Date	Revisions	Revised By
V1	5/12/2023	Initial Issue	--
V2	6/14/2023	1. Updated section 1 date tested. 2. Updated section 1 statement.	Devin Chang
V3	6/27/2013	Updated Section 6.1	Dave Weaver

Table of Contents

1. Attestation of Test Results 5

2. Test Specification, Methods and Procedures..... 6

3. Facilities and Accreditation 7

4. SAR Measurement System & Test Equipment 8

 4.1. SAR Measurement System..... 8

 4.2. SAR Scan Procedures 9

 4.3. Test Equipment..... 11

5. Measurement Uncertainty..... 13

6. Device Under Test (DUT) Information 14

 6.1. DUT Description 14

 6.2. Wireless Technologies..... 15

 6.3. General 5G NR(FR1) SAR Test and Reporting Considerations 15

 6.4. Time-Average Feature 16

7. RF Exposure Conditions (Test Configurations) 17

8. Dielectric Property Measurements & System Check 18

 8.1. Dielectric Property Measurements 18

 8.2. System Check..... 20

9. Conducted Output Power Measurements..... 21

 9.1. 5G NR(FR1) 21

10. Measured and Reported (Scaled) SAR Results..... 26

 10.1. 5G NR Band n48 (40MHz Bandwidth) 27

11. SAR Measurement Variability 28

12. Simultaneous Transmission Conditions 29

 12.1. Sum of the SAR for WWAN(CBE) Cell-on ANT4 & Wi-Fi & BT results 31

 12.2. Sum of the SAR for WWAN(CBE) Cell-on ANT7 & Wi-Fi & BT results 31

 12.3. Sum of the SAR for WWAN(CBE) Cell-on ANT8 & Wi-Fi & BT results 32

 12.4. Sum of the SAR for WWAN(CBE) Cell-on ANT9 & Wi-Fi & BT results 32

Appendixes 33

 Appendix A: SAR Setup Photos 33

 Appendix B: SAR System Check Plots 33

 Appendix C: SAR Highest Test Plots..... 33

 Appendix D: SAR Tissue Ingredients..... 33

<i>Appendix E: SAR Probe Certificates.....</i>	<i>33</i>
<i>Appendix F: SAR Dipole Certificates.....</i>	<i>33</i>

1. Attestation of Test Results

Applicant Name		APPLE INC.	
FCC ID		BCG-E8141A (Parent Model) BCG-E8154A, BCG-E8155A, BCG-E8156A (Variant Models)	
Model Name		A2651 (Parent Model) A2893, A2894, A2895, A2896 (Variant Models)	
Applicable Standards		FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013	
Exposure Category		SAR Limits (W/Kg)	
		Peak spatial-average(1g of tissue)	Extremities (hands, wrists, ankles, etc.) (10g of tissue)
General population / Uncontrolled exposure		1.6	4
RF Exposure Conditions		Equipment Class - Highest Reported SAR (W/kg)	
		CBE	
Head		0.919	
Body-worn (Dist.= 5 mm)		0.899	
Hotspot (Dist.= 5 mm)		0.899	
Simultaneous TX	Head	1.329	
	Body-worn	1.415	
	Hotspot	1.415	
Date Tested		7/17/2022 to 7/20/2022	
Test Results		Pass	
<p>This is C2PC report to add NR n48 as documented in C2PC letter. WLAN/BT data used for simultaneous transmission evaluation is based on the original SAR report 14040866-S1.</p> <p>This lead model is representative of variant models A2893, A2894, A2895, A2896 (FCC ID: BCG-E8154A, BCG-E8155A, BCG-E8156A). SAR data reuse for these variants from the lead model was approved via KDB inquiry with spot checks required for the worst case exposure condition for each equipment code. As the original LTE band 48 data represents worst case for equipment code CBE no additional spot checks for the variant models are required.</p> <p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.</p> <p>The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.</p> <p>This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.</p>			
Approved & Released By:		Prepared By:	
			
Devin Chang Senior Test Engineer UL Verification Services Inc.		AJ Newcomer Laboratory Test Engineer UL Verification Services Inc.	

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure **KDB** procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01

In addition to the above, the following information was used:

- **TCB workshop** October 2014; RF Exposure Procedures (Other LTE Considerations)
- **TCB workshop** April 2015; RF Exposure Procedures (Overlapping LTE Bands)
- **TCB workshop** October 2015; RF Exposure Procedures (KDB 941225 D05A)
- **TCB workshop** April 2016; RF Exposure Procedures (LTE Carrier Aggregation for DL)
- **TCB workshop** October 2016; RF Exposure Procedures (LTE Carrier Aggregation for UL)
- **TCB workshop** October 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- **TCB workshop** October 2016; RF Exposure Procedures (DUT Holder Perturbations)
- **TCB workshop** May 2017; RF Exposure Procedures (Broadband Liquid Above 3 GHz)
- **TCB workshop** May 2017; RF Exposure Procedures (LTE Band 41 Power Class 2)
- **TCB workshop** November 2017; RF Exposure Procedures (LTE UL/DL Carrier Aggregation SAR)
- **TCB workshop** April 2018; RF Exposure Procedures (LTE DL CA SAR Test Exclusion)
- **TCB workshop** October 2018; RF Exposure Procedures (LTE Inter-Band Uplink Carrier Aggregation –Interim Procedures)
- **TCB workshop** April 2019; RF Exposure Procedures (802.11ax SAR Testing)
- **TCB workshop** November 2019; RF Exposure Policy Updates (5G NR FR1 NSA EN-DCUE SAR Evaluations)
- **TCB workshop** April 2021; RF Exposure Procedures (Remarks on Test Reductions via Data Referencing for Closely Related Products)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	SAR Lab 6
SAR Lab G	SAR Lab 8
SAR Lab H	SAR Lab 9
	SAR Lab 10
	SAR Lab 11
	SAR Lab 12
	SAR Lab 13
	SAR Lab 14
	SAR Lab 15
	SAR Lab 16

UL Verification Services Inc. is accredited by A2LA, Certificate Number 0751.05


The Test Lab Conformity Assessment Body Identifier (CABID)

Location	CABID	Company Number
47173 Benicia Street, Fremont, CA, 94538 UNITED STATES	US0104	2324A
47266 Benicia Street, Fremont, CA, 94538 UNITED STATES		22541

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY system used for performing compliance tests consists of the following items:

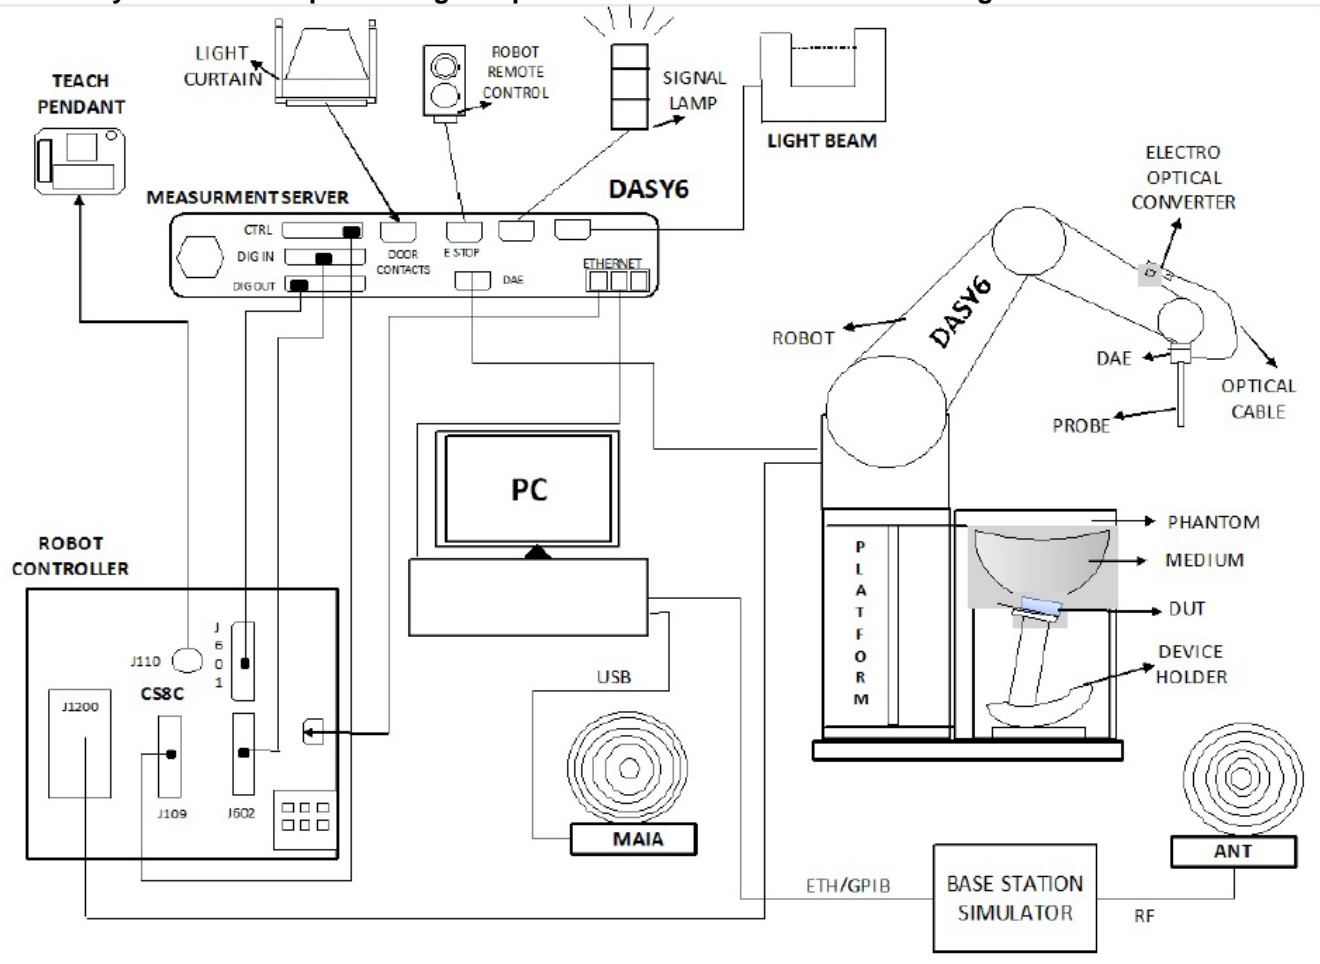

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7, Win10 and the DASY52¹ and DASY6² software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

¹ DASY52 software used: DASY52.10.4 & S 14.6.14 and older generations.

² DASY6 software used: DASY6.14 & S 14.6.14 and older generations.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	R&S	ZNLE6	171919	2/18/2023
Dielectric Probe Kit	SPEAG	DAK 3.5mm Probe	80345	11/16/2023
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	11/16/2023
Thermometer	Fisher Scientific	Z540	T1130	8/1/2022
Network Analyzer	R&S	ZNLE6	13230012K56-101274-mn	2/15/2023
Dielectric Probe Kit	SPEAG	DAK 3.5mm Probe	1082	9/19/2022
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	9/19/2022
Thermometer	Fisher Scientific	Z540	170064398	9/1/2022
Vector Reflectometer	Copper Mountain	DAKS VNA R140	170514	4/25/2023
Dielectric Probe Kit	Speag	DAK 3.5mm Probe	SM DAK 520 AA	3/9/2023
Shorting Block	Speag	DAK-3.5 Short	SM DAK 200 CA	3/9/2023
Thermometer	Traceable	4353	221312857	3/3/2024

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	N5181A	MY50140610	1/26/2023
Power Meter	Keysight	N1912a	MY55196007	1/25/2023
Power Sensor	Agilent	N1921A	MY52270022	1/25/2023
Power Sensor	Agilent	N1921A	MY5220012	1/25/2023
Amplifier	Miteq	147117-1E	1795093	N/A
Directional Coupler	SMA	C8060-102	2717	N/A
DC Power Supply	Sorensen	XT15-4	1817A02680	N/A
Synthesized Signal Generator	Agilent	N5181A	MY50140630	1/25/2023
Power Meter	Agilent	N1912A	MY50001018	1/25/2023
Power Sensor	Agilent	N1921A	MY53260010	2/3/2023
Power Sensor	Agilent	N1921A	MY5226009	1/25/2023
Amplifier	Miteq	1795092	147117-1E	N/A
Directional Coupler	SMA	C8050-102	4062	N/A
DC Power Supply	H/P	6296A	2841A-05955	N/A
Synthesized Signal Generator	R&S	SMB 100A	1406-6000K03-180970-zC	2/16/2023
Power Meter	HP	437B	3125U11364	1/25/2023
Power Sensor	HP	8481A	HA2022C004446	1/25/2023
Power Sensor	R&S	NRP50S	1419 0087K02-101250-pe	2/16/2023
Synthesized Signal Generator	R&S	SMB 100A	1406 600K03-180968-Gx	2/18/2023
Power Meter	HP	437B	HA2022C004449	1/25/2023
Power Sensor	HP	8481A	HA2022C004445	1/25/2023
Power Sensor	R&S	NRP18A	1424 6815K02-100992-iu	2/19/2023
Synthesized Signal Generator	Rohde & Schwarz	SMB 100A	1406.6000K03-180969-Yc	2/16/2023
Power Meter	Keysight	N1911A	MY55196015	1/26/2023
Power Sensor	Agilent	N1921A	MY53260001	1/25/2023
Power Sensor	Rohde & Schwarz	NRP18A	1424.6815K02-100994-RE	2/19/2023
Directional Coupler	Werlatone	C8060-102	2710	N/A
Synthesized Signal Generator	R & S	SMU 200A	102448	7/15/2023
Power Meter	R & S	NRP2	102818-pb	7/25/2022
Power Sensor	R & S	NRP-Z81	106316-XJ	8/28/2022
Amplifier	AR	20S1G4M4	337209	N/A
Directional Coupler	Krytar	158010	142255	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 3)	SPEAG	EX3DV4	7356	3/24/2023
E-Field Probe (SAR Lab 4)	SPEAG	EX3DV4	3929	3/23/2023
E-Field Probe (SAR Lab 6)	SPEAG	EX3DV4	3990	2/25/2023
E-Field Probe (SAR Lab 10)	SPEAG	EX3DV4	3989	1/19/2023
Data Acquisition Electronics (SAR Lab 3)	SPEAG	DAE4	1540	1/11/2023
Data Acquisition Electronics (SAR Lab 4)	SPEAG	DAE4	1433	2/23/2023
Data Acquisition Electronics (SAR Lab 6)	SPEAG	DAE4	1621	4/21/2023
Data Acquisition Electronics (SAR Lab 10)	SPEAG	DAE4	1547	4/21/2023

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
System Validation Dipole	SPEAG	D3700V2	1039	5/6/2023

OTHER

Name of Equipment	Manufacturer	Type/Model	T Number	Serial No.	Cal. Due Date
Wideband Radio Communication Tester	R&S	CMW 500	85940	137877	2/18/2023
Wideband Radio Communication Tester	R&S	CMW 500	85719	135390	2/20/2023
Wideband Radio Communication Tester	R&S	CMW 500	80580	132910	2/19/2023
Wideband Radio Communication Tester	R&S	CMW 500	85698	135393	2/18/2023
Wideband Radio Communication Tester	R&S	CMW 500	81849	124594	2/18/2023
Wideband Radio Communication Tester	R&S	CMW 500	85348	125236	2/15/2023
Wideband Radio Communication Tester	R&S	CMW 500	209235	170415	2/22/2023
Wideband Radio Communication Tester	R&S	CMW 500	208643	170416	2/15/2023
Wideband Radio Communication Tester	R&S	CMW 500	85789	137873	2/16/2023
Wideband Radio Communication Tester	R&S	CMW 500	85781	135384	2/16/2023
Wideband Radio Communication Tester	R&S	CMW 500	85763	134852	2/20/2023
Wideband Radio Communication Tester	R&S	CMW 500	85727	134854	2/21/2023
Wideband Radio Communication Tester	R&S	CMW 500	86119	137875	2/17/2023
Power Meter	Keysight Technologies	N1912A	N/A	MY55196007	1/25/2023
Power Sensor	Agilent	N1921A	N/A	MY52270022	1/25/2023
Power Meter	Keysight Technologies	N1912A	N/A	MY55196004	1/26/2023
Power Sensor	Agilent	N1921A	N/A	MY53020038	3/2/2023

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and MSS. All models except reference model support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

All Models have the same PCB layout, circuit design, common components, antennas and antenna locations. Their cellular modem, Wi-Fi, BT, NFC, WPT, UWB and MSS transmitters are identical.

The device utilizes two power modes: Mode A(DSI=0) and Mode B(DSI=1). Power selection is determined by the device’s positioning and use case as described in Sec. 10. Mode A power is used when the device is used against the user’s head, or away from the body. Mode B is used when the device is used in a body-worn configuration by the user.

The WWAN transmit antenna switching mechanism between WWAN antennas is implemented with a physical “break-before-make” switch so that only one antenna can be used for WWAN transmission at one time.

In Airplay mode, the device uses same power and power control mechanism as Wi-Fi. Airplay is not supported in hotspot mode. Airplay utilize the same 802.11 modes, modulation, MIMO, Channel Bandwidth, etc. as Wi-Fi does. Therefore, Airplay usage is categorized by the Wi-Fi SAR testing contained in Section 10.

There are three vendors of the Wi-Fi/Bluetooth radio modules: variant 1, 2, and 3. The Wi-Fi/BT radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. It is confirmed that Variant 1 represents the worst case.

This product utilizes a time-averaged power control mechanism – Wi-Fi Time-Averaged SAR(TAS) within the Wi-Fi chipset – that ensures total power across all Wi-Fi transmitters does not exceed applicable regulatory limits. For further details, refer to the technical description document.

Device Dimension	Overall (Length x Width): 160.71 mm x 77.58 mm Overall Diagonal: 178.31 mm (7.02 inch) Display Diagonal: 169.93 mm (6.69 inch)
Back Cover	The Back Cover is not removable
Battery Options	The rechargeable battery is not user accessible.
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its WWAN data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Mobile Hotspot Wi-Fi 5.2(UNII-1)/5.8 GHz(UNII-3)
AirPlay	AirPlay mode enabled devices transfer data directly between each other <input checked="" type="checkbox"/> AirPlay (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> AirPlay (Wi-Fi 5 GHz)
Bluetooth Tethering (Hotspot)	BT Tethering mode permits the device to share its cellular data connection with other devices. <input checked="" type="checkbox"/> BT Tethering (Bluetooth 2.4 GHz)

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
5G NR (FR1)	TDD band n48	CP-OFDM: Pi/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM DFT-s-OFDM: QPSK, 16QAM, 64QAM, 256QAM	100%

6.3. General 5G NR(FR1) SAR Test and Reporting Considerations

n48	SCS (kHz)	Frequency range: 3550 - 3700 MHz (BW = 150 MHz)													
		Channel Bandwidth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
Low	30							638000 /3570	637332 /3564.99		637332 /3559.98		637000 /3555		
Low-Mid	30							640444 /3606.66	640332 /3604.98		640222 /3603.33		640110 /3601.65		
Mid	30							642888 /3643.32	642998 /3644.97		643110 /3646.65		643220 /3648.3		
High	30							645332 /3679.98	645666 /3684.99		645998 /3689.97		646332 /3694.98		

SCS	30 kHz (n48)
NR(FR1) transmitter and antenna implementation	Refer to section 7 and Appendix A.
A-MPR(Additional MPR) disabled for SAR testing?	Yes
EN-DC Carrier Aggregation Possible Combinations	
LTE Anchor Bands for NR band n48	LTE Band 2/5/13/66

Notes:

- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per FCC Guidance.
- SAR test for NR bands and LTE anchor Bands were performed separately due to limitations in SAR probe calibration factors. And, due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.
- FR1 supported standalone.

6.4. Time-Average Feature

The equipment under test (EUT) incorporates the Smart Transmit (SmartTX) SAR averaging algorithm provided by Qualcomm for cellular technologies. Smart Transmit controls the Tx power of the cellular-based wireless device in real-time to maintain the time-averaged Tx power, and in turn, time-averaged RF exposure, below the predefined time-average power limit characterized for each technology and band.

The purpose of the Part 1 test in this report is to demonstrate that the EUT meets the FCC SAR limits when transmitting in static transmission scenario at maximum allowable time-averaged power levels.

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target or PD_design_target, below the predefined time-average power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously as high as P_{max}, when needed, but enforces power limiting to maintain time-averaged transmit power to P_{limit}. Below table shows P_{limit} EFS settings and maximum tune up output power P_{max} configured for this EUT for various transmit conditions (DSI – Device State Index).

The maximum time-averaged output power (dBm) for any 2G/3G/4G/5G NR WWAN technology band, and DSI = minimum of “P_{limit} EFS” and “Maximum tune up output power P_{max}” includes device uncertainty.

SAR values in this report were scaled to the maximum time-averaged output power to determine compliance following KDB 447498 D01.

P _{design}	The power level that corresponds to the exposure design target (SAR_design_target) after accounting for all device design related uncertainties.
P _{limit}	Maximum tune-up output power for SAR Mode A and Mode B
P _{max}	Maximum tune-up output power for RF
SAR Characterization	Table containing P _{limit} for all technologies and bands

SAR Characterization

Exposure Scenario		factor	Head				Body-worn & Hotspot				P _{max} (dBm) Tune-up power table	
Spatial-average	1g				1g							
Test Distance	0 mm				5 mm							
Power Mode (DSI)	Mode A (DSI=0)				Mode B (DSI=1)							
Antenna	Tech/Band		P _{design} (dBm) corresponding to 1.0 W/kg (SAR_design_target)	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 1.0 W/kg (SAR_design_target)	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 1.0 W/kg (SAR_design_target)	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 1.0 W/kg (SAR_design_target)	P _{limit} (dBm) Tune-up power table		
Transmit Average		Burst Average		Frame Average		Burst Average		Frame Average		Burst Average	Frame Average	
ANT4	NR n48 ¹	1	21.67	20.60	21.67	20.60	21.17	20.30	21.17	20.30	24.40	24.40
ANT7	NR n48 ¹	1	32.16	25.30	32.16	25.30	21.62	20.40	21.62	20.40	25.30	25.30
ANT8	NR n48 ¹	1	23.39	21.40	23.39	21.40	21.63	20.70	21.63	20.70	25.30	25.30
ANT9	NR n48 ¹	1	36.97	26.00	36.97	26.00	23.99	22.70	23.99	22.70	26.00	26.00

Note(s):

- All P_{limit} EFS and maximum tune up output P_{max} levels entered in above Table correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (for e.g., GSM & LTE TDD).
- Measurement Condition: All conducted power and SAR measurements in this report (Part 1 test) were performed by setting Reserve_power_margin (Smart Transmit EFS entry) to 0 dB.
- Only P_{limit} is considered for SAR Evaluation.

7. RF Exposure Conditions (Test Configurations)

This device has a total of 9 antennas. From Front of the device, antennas and supported frequencies are described and located as follows:

Antenna	Band	Rear	Front	Edge 1	Edge 2	Edge 3	Edge 4
				(Top Edge)	(Right Edge)	(Bottom Edge)	(Left Edge)
ANT4	5G(FR1) n48	Yes	Yes	Yes	Yes	No	No
ANT7	5G(FR1) n48	Yes	Yes	No	Yes	Yes	No
ANT8	5G(FR1) n48	Yes	Yes	Yes	No	No	Yes
ANT9	5G(FR1) n48	Yes	Yes	No	No	Yes	Yes

Note(s):

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot Mode.
2. The Body-worn minimum separation distance is 5 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 5 mm.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

IEC 62209-1

Refer to Table A.3 within the IEC 62209-1

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
3	7/17/2022	3700	Head	3700	37.33	37.70	-0.99%	2.98	3.12	-4.37%
				3600	37.49	37.82	-0.86%	2.89	3.01	-4.21%
				3800	37.16	37.59	-1.14%	3.08	3.22	-4.34%
4	7/17/2022	3700	Head	3700	39.04	37.70	3.55%	3.01	3.12	-3.50%
				3600	39.22	37.82	3.71%	2.91	3.01	-3.41%
				3800	38.87	37.59	3.41%	3.11	3.22	-3.50%
6	7/17/2022	3700	Head	3700	37.38	37.70	-0.85%	2.99	3.12	-3.95%
				3600	37.55	37.82	-0.70%	2.90	3.01	-3.81%
				3800	37.21	37.59	-1.00%	3.09	3.22	-3.96%
10	7/18/2022	3700	Head	3700	39.41	37.70	4.53%	3.00	3.12	-3.70%
				3600	39.60	37.82	4.72%	2.91	3.01	-3.55%
				3800	39.26	37.59	4.45%	3.11	3.22	-3.53%

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within ±10% of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
3	7/17/2022	Head	D3700V2 SN:1039	5/6/2023	6.710	67.10	69.27	-3.13%	2.440	24.40	25.68	-4.98%	1
4	7/17/2022	Head	D3700V2 SN:1039	5/6/2023	6.880	68.80	69.27	-0.68%	2.550	25.50	25.68	-0.69%	2
6	7/17/2022	Head	D3700V2 SN:1039	5/6/2023	6.320	63.20	69.27	-8.76%	2.330	23.30	25.68	-9.26%	3
10	7/19/2022	Head	D3700V2 SN:1039	5/6/2023	6.610	66.10	69.27	-4.58%	2.520	25.20	25.68	-1.86%	4

9. Conducted Output Power Measurements

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-worn configuration by the user.

The selection between antennas in the application is based on RSSI based antenna selection. The full details of power selections are described in the operational description. Refer to Sec. 7 and Sec. 10 for details of the testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted in detail for each technology in their respective Sections.

The Tune-up limit already includes component tolerance. KDB 447498 sec.4.1.(d) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

Two different powers are being displayed in this section:

- Target Output Power: Power not including the + tolerance
- Tune-Up Limit: Power of target + tolerance.

9.1. 5G NR(FR1)

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS 138.521-1 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS138.521-1.

Table 6.2.2.3-1: Maximum Power Reduction (MPR) for Power 3

Modulation	MPR (dB)		
	Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM PI/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
	$\leq 0.5^2$		0^2
DFT-s-OFDM QPSK	≤ 1		0
DFT-s-OFDM 16 QAM	≤ 2		≤ 1
DFT-s-OFDM 64 QAM		≤ 2.5	
DFT-s-OFDM 256 QAM		≤ 4.5	
CP-OFDM QPSK	≤ 3		≤ 1.5
CP-OFDM 16 QAM	≤ 3		≤ 2
CP-OFDM 64 QAM		≤ 3.5	
CP-OFDM 256 QAM		≤ 6.5	

NOTE 1: Applicable for UE operating in TDD mode with PI/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0dB MPR is 26dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40% of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

The allowed A-MPR values specified below in Table 6.2.3.3.1-1 of 3GPP TS138.521-1 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01"

Table 6.2.3.3.1-1: Additional maximum power reduction (A-MPR)

Network Signalling label	Requirements (subclause)	NR Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01		Table 5.2-1	5, 10, 15, 20, 25, 30, 40, 50, 60, 80, 90, 100	Table 5.3.2-1	N/A

Uplink RB allocations were used to Table 6.1-1 of the 3GPP TS 138.521-1.

Channel Bandwidth	SCS(kHz)	OFDM	RB allocation							
			Edge_Full_Left	Edge_Full_Right	Edge_1RB_Left	Edge_1RB_Right	Outer_Full	Inner_Full	Inner_1RB_Left	Inner_1RB_Right
5MHz	15	DFT-s	2@0	2@23	1@0	1@24	25@0	12@6	1@1	1@23
		CP	2@0	2@23	1@0	1@24	25@0	13@6	1@1	1@23
	30	DFT-s	2@0	2@9	1@0	1@10	10@0	5@2 ¹	1@1	1@9
		CP	2@0	2@9	1@0	1@10	11@0	5@2 ¹	1@1	1@9
	60	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10MHz	15	DFT-s	2@0	2@50	1@0	1@51	50@0	25@12	1@1	1@50
		CP	2@0	2@50	1@0	1@51	52@0	26@13	1@1	1@50
	30	DFT-s	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22
		CP	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22
	60	DFT-s	2@0	2@9	1@0	1@10	10@0	5@2 ¹	1@1	1@9
		CP	2@0	2@9	1@0	1@10	11@0	5@2 ¹	1@1	1@9
15MHz	15	DFT-s	2@0	2@77	1@0	1@78	75@0	36@18	1@1	1@77
		CP	2@0	2@77	1@0	1@78	79@0	39@19 ¹	1@1	1@77
	30	DFT-s	2@0	2@36	1@0	1@37	36@0	18@9	1@1	1@36
		CP	2@0	2@36	1@0	1@37	38@0	19@9	1@1	1@36
	60	DFT-s	2@0	2@16	1@0	1@17	18@0	9@4	1@1	1@16
		CP	2@0	2@16	1@0	1@17	18@0	9@4	1@1	1@16
20MHz	15	DFT-s	2@0	2@104	1@0	1@105	100@0	50@25	1@1	1@104
		CP	2@0	2@104	1@0	1@105	108@0	53@26	1@1	1@104
	30	DFT-s	2@0	2@49	1@0	1@50	50@0	25@12	1@1	1@49
		CP	2@0	2@49	1@0	1@50	51@0	25@12 ¹	1@1	1@49
	60	DFT-s	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22
		CP	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22
25MHz	15	DFT-s	2@0	2@131	1@0	1@132	128@0	64@32	1@1	1@131
		CP	2@0	2@131	1@0	1@132	133@0	67@33	1@1	1@131
	30	DFT-s	2@0	2@63	1@0	1@64	64@0	32@16	1@1	1@63
		CP	2@0	2@63	1@0	1@64	65@0	33@16	1@1	1@63
	60	DFT-s	2@0	2@29	1@0	1@30	30@0	15@7 ¹	1@1	1@29
		CP	2@0	2@29	1@0	1@30	31@0	15@7 ¹	1@1	1@29
30MHz	15	DFT-s	2@0	2@158	1@0	1@159	160@0	80@40	1@1	1@158
		CP	2@0	2@158	1@0	1@159	160@0	80@40	1@1	1@158
	30	DFT-s	2@0	2@78	1@0	1@77	75@0	36@18	1@1	1@78
		CP	2@0	2@78	1@0	1@77	78@0	39@19	1@1	1@78
	60	DFT-s	2@0	2@36	1@0	1@37	36@0	18@9	1@1	1@36
		CP	2@0	2@36	1@0	1@37	38@0	19@9	1@1	1@36
40MHz	15	DFT-s	2@0	2@214	1@0	1@215	216@0	108@54	1@1	1@214
		CP	2@0	2@214	1@0	1@215	218@0	108@54	1@1	1@214
	30	DFT-s	2@0	2@104	1@0	1@105	100@0	50@25	1@1	1@104
		CP	2@0	2@104	1@0	1@105	108@0	53@26	1@1	1@104
	60	DFT-s	2@0	2@49	1@0	1@50	50@0	25@12	1@1	1@49
		CP	2@0	2@49	1@0	1@50	51@0	25@12 ¹	1@1	1@49
50MHz	15	DFT-s	2@0	2@268	1@0	1@269	270@0	135@67	1@1	1@268
		CP	2@0	2@268	1@0	1@269	270@0	135@67	1@1	1@268
	30	DFT-s	2@0	2@131	1@0	1@132	128@0	64@32	1@1	1@131
		CP	2@0	2@131	1@0	1@132	133@0	67@33	1@1	1@131
	60	DFT-s	2@0	2@63	1@0	1@64	64@0	32@16	1@1	1@63
		CP	2@0	2@63	1@0	1@64	65@0	33@16	1@1	1@63
60MHz	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	30	DFT-s	2@0	2@160	1@0	1@161	162@0	81@40	1@1	1@160
		CP	2@0	2@160	1@0	1@161	162@0	81@40	1@1	1@160
	60	DFT-s	2@0	2@77	1@0	1@78	75@0	36@18	1@1	1@77
		CP	2@0	2@77	1@0	1@78	79@0	39@19 ¹	1@1	1@77
80MHz	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
90MHz	30	DFT-s	2@0	2@215	1@0	1@216	216@0	108@54	1@1	1@215
		CP	2@0	2@215	1@0	1@216	217@0	109@54	1@1	1@215
	60	DFT-s	2@0	2@105	1@0	1@106	100@0	50@25	1@1	1@105
		CP	2@0	2@105	1@0	1@106	107@0	53@26 ¹	1@1	1@105
	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
30	DFT-s	2@0	2@243	1@0	1@244	240@0	120@60	1@1	1@243	
	CP	2@0	2@243	1@0	1@244	245@0	123@61	1@1	1@243	
60	DFT-s	2@0	2@119	1@0	1@120	120@0	60@30	1@1	1@119	
	CP	2@0	2@119	1@0	1@120	121@0	61@30	1@1	1@119	
100MHz	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	30	DFT-s	2@0	2@271	1@0	1@272	270@0	135@67	1@1	1@271
		CP	2@0	2@271	1@0	1@272	273@0	137@68	1@1	1@271
	60	DFT-s	2@0	2@133	1@0	1@134	135@0	64@32	1@1	1@133
		CP	2@0	2@133	1@0	1@134	135@0	67@33 ¹	1@1	1@133

Note 1: The allocated RB number Low is $cell(N_{RB}/2) - 1$ in order to meet Inner RB allocation definition ($RB_{start,Low} \leq RB_{start} \leq RB_{start,High}$) described in subclause 6.2.2 of TS 38.101-1 [2].

Output Power for 5G NR (FR1)

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping 5G NR(FR1) bands as follows:

- a) The maximum output power, including tolerance, for the smaller band must be ≤ the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

SAR measurement is not required for the Pi/2 BPSK, 16QAM, 64QAM and 256QAM. When the highest maximum output power for Pi/2 BPSK, 16QAM, 64QAM and 256QAM is ≤ ½ dB higher than the QPSK or when the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.

Please refer to section 6.5. for 5G NR(FR1) detail test channels.

RF Air interface	Mode	Target Output Power (dBm)								Tolerance	Maximum Output Power (Tune-up Limit) (dBm)								
		ANT7		ANT8		ANT9		ANT4			ANT7		ANT8		ANT9		ANT4		
		Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B		+	-	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	
NR n48	QPSK	24.30	19.40	20.40	19.70	25.00	21.70	19.60	19.30	1.0	-1.0	25.30	20.40	21.40	20.70	26.00	22.70	20.60	20.30

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

10.1. 5G NR Band n48 (40MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 7	Head	π/2 BPSK	Mode A	0	Left Touch	642888	3643.3	1	52	25.3	25.3	0.196	0.196	0.062	0.062	
								50	25	25.3	25.2	0.100	0.102	0.044	0.045	
					Left Tilt	642888	3643.3	1	52	25.3	25.3	0.023	0.023	0.007	0.007	
								50	25	25.3	25.2	0.083	0.085	0.030	0.030	
					Right Touch	642888	3643.3	1	52	25.3	25.3	0.033	0.033	0.012	0.012	1
								50	25	25.3	25.2	0.198	0.203	0.087	0.089	
					Right Tilt	642888	3643.3	1	52	25.3	25.3	0.069	0.069	0.028	0.028	
								50	25	25.3	25.2	0.078	0.080	0.032	0.033	
	Body & Hotspot	π/2 BPSK	Mode B	5	Rear	642888	3643.3	1	52	20.4	20.4	0.852	0.852	0.319	0.319	2
								50	25	20.4	20.4	0.878	0.878	0.324	0.324	
					Front	642888	3643.3	1	52	20.4	20.4	0.430	0.430	0.167	0.167	
								50	25	20.4	20.4	0.433	0.433	0.173	0.173	
Hotspot	π/2 BPSK	Mode B	5	Edge 2	642888	3643.3	1	52	20.4	20.4	0.735	0.735	0.279	0.279		
							50	25	20.4	20.4	0.750	0.750	0.294	0.294		
				Edge 3	642888	3643.3	1	52	20.4	20.4	0.291	0.291	0.096	0.096		
							50	25	20.4	20.4	0.314	0.314	0.102	0.102		
ANT 8	Head	π/2 BPSK	Mode A	0	Left Touch	642888	3643.3	1	52	21.4	20.8	0.334	0.383	0.126	0.145	
								50	25	21.4	20.7	0.376	0.442	0.135	0.159	
					Left Tilt	642888	3643.3	1	52	21.4	20.8	0.372	0.427	0.128	0.147	
								50	25	21.4	20.7	0.322	0.378	0.109	0.128	
					Right Touch	642888	3643.3	1	52	21.4	20.8	0.785	0.901	0.283	0.325	3
								50	25	21.4	20.7	0.782	0.919	0.282	0.331	
					Right Tilt	642888	3643.3	1	52	21.4	20.8	0.624	0.716	0.191	0.219	
								50	25	21.4	20.7	0.575	0.676	0.204	0.240	
	Body & Hotspot	π/2 BPSK	Mode B	5	Rear	642888	3643.3	1	52	20.7	20.0	0.369	0.434	0.156	0.183	4
								50	25	20.7	20.0	0.432	0.508	0.187	0.220	
					Front	642888	3643.3	1	52	20.7	20.0	0.247	0.290	0.090	0.105	
								50	25	20.7	20.0	0.187	0.220	0.074	0.087	
Hotspot	π/2 BPSK	Mode B	5	Edge 1	642888	3643.3	1	52	20.7	20.0	0.252	0.296	0.081	0.095		
							50	25	20.7	20.0	0.227	0.267	0.073	0.086		
				Edge 4	642888	3643.3	1	52	20.7	20.0	0.602	0.707	0.218	0.256	5	
							50	25	20.7	20.0	0.600	0.705	0.220	0.258		
ANT 9	Head	π/2 BPSK	Mode A	0	Left Touch	642888	3643.3	1	52	26.0	25.7	0.306	0.328	0.097	0.103	6
								50	25	26.0	25.6	0.233	0.255	0.076	0.084	
					Left Tilt	642888	3643.3	1	52	26.0	25.7	0.038	0.041	0.012	0.013	
								50	25	26.0	25.6	0.032	0.035	0.008	0.009	
					Right Touch	642888	3643.3	1	52	26.0	25.7	0.049	0.053	0.013	0.014	
								50	25	26.0	25.6	0.057	0.062	0.012	0.013	
					Right Tilt	642888	3643.3	1	52	26.0	25.7	0.020	0.021	0.005	0.006	
								50	25	26.0	25.6	0.019	0.021	0.007	0.007	
	Body & Hotspot	π/2 BPSK	Mode B	5	Rear	642888	3643.3	1	52	22.7	22.7	0.601	0.601	0.254	0.254	7
								50	25	22.7	22.5	0.608	0.637	0.258	0.270	
					Front	642888	3643.3	1	52	22.7	22.7	0.535	0.535	0.226	0.226	
								50	25	22.7	22.5	0.523	0.548	0.217	0.227	
Hotspot	π/2 BPSK	Mode B	5	Edge 3	642888	3643.3	1	52	22.7	22.7	0.278	0.278	0.103	0.103		
							50	25	22.7	22.5	0.263	0.275	0.098	0.102		
				Edge 4	642888	3643.3	1	52	22.7	22.7	0.761	0.761	0.262	0.262		
							50	25	22.7	22.5	0.801	0.839	0.272	0.285		
ANT 4	Head	π/2 BPSK	Mode A	0	Left Touch	642888	3643.3	1	52	20.6	20.1	0.788	0.884	0.273	0.306	9
								50	25	20.6	20.0	0.772	0.886	0.269	0.309	
					Left Tilt	642888	3643.3	1	52	20.6	20.1	0.442	0.496	0.168	0.188	
								50	25	20.6	20.0	0.414	0.475	0.158	0.181	
					Right Touch	642888	3643.3	1	52	20.6	20.1	0.171	0.192	0.067	0.075	
								50	25	20.6	20.0	0.174	0.200	0.066	0.076	
					Right Tilt	642888	3643.3	1	52	20.6	20.1	0.129	0.145	0.047	0.053	
								50	25	20.6	20.0	0.141	0.162	0.051	0.059	
	Body & Hotspot	π/2 BPSK	Mode B	5	Rear	642888	3643.3	1	52	20.3	20.2	0.829	0.848	0.289	0.296	10
								50	25	20.3	20.1	0.859	0.899	0.295	0.309	
					Front	642888	3643.3	1	52	20.3	20.2	0.333	0.341	0.116	0.119	
								50	25	20.3	20.1	0.296	0.310	0.104	0.109	
Hotspot	π/2 BPSK	Mode B	5	Edge 1	642888	3643.3	1	52	20.3	20.2	0.078	0.080	0.026	0.027		
							50	25	20.3	20.1	0.089	0.093	0.030	0.031		
				Edge 2	642888	3643.3	1	52	20.3	20.2	0.834	0.853	0.293	0.300		
							50	25	20.3	20.1	0.830	0.869	0.290	0.304		

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note(s):

Repeated measurement is not required since the original highest measured SAR is <0.8 W/kg (1-g) or 2 W/kg (10-g) .

12. Simultaneous Transmission Conditions

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

SAR to Peak Location Ratio (SPLSR)

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri \leq 0.04$$

When an individual antenna transmits at on two bands simultaneously, the sum of the highest *reported* SAR for the frequency bands should be used to determine **SAR₁**, or **SAR₂**. When SPLSR is necessary, the smallest distance between the peak SAR locations for the antenna pair with respect to the peaks from each antenna should be used.

The antennas in all antenna pairs that do not qualify for simultaneous transmission SAR test exclusion must be tested for SAR compliance, according to the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01

Simultaneous transmission SAR measurement

When simultaneous transmission SAR measurements are required in different frequency bands not covered by a single probe calibration point then separate tests for each frequency band are performed. The tests are performed using enlarged zoom scans which are processed, by means of superposition, using the DASY volume scan post-processing procedures to determine the 1-g SAR for the aggregate SAR distribution.

The spatial resolution used for all enlarged zoom scans is the same as used for the most stringent zoom scans. I.E. the scan parameters required for the highest frequency assessed are used for all enlarged zoom scans. The scans cover the complete area of the device to ensure all transmitting antennas and radiating structures are assessed.

DASY provides the ability to perform Multiband Evaluations according to the latest standards using the Volume Scan job as well as appropriate routines for the Post-processing.

In order to extract and process measurements within different frequency bands, the SEMCAD X Post-processor performs the combination and subsequent superposition of these measurement data via DASY = Combined MultiBand Averaged SAR.

Combined Multi Band Averaged SAR allows - in addition to the data extraction - an evaluation of the 1 g, 10 g and/or arbitrary averaged mass SAR.

Power Scaling Factor is used to allow the volume scans to be scaled by a value other than "1", this is important when the results need to be scaled to different maximum power levels. The Power Scaling Factor is applied to each individual point of the scan. When power scaling is used in multi-band combinations the scaling factor is applied to each individual point of the first scan, the second factor is then applied to each individual point of the second scan and so on. The scans are then combined.

Simultaneous transmission SAR Exclusion

According to KDB 248227 D01, simultaneous SAR provisions in KDB 447498 D01 apply to determine simultaneous transmission SAR test exclusion for Wi-Fi MIMO. If the sum of 1-g single transmission chain SAR measurements is <1.6W/kg and/or the MIMO output power is equal or less than a single chain, then no additional SAR measurements for simultaneously at the specified maximum output power of MIMO operation.

When antennas are spatially separated to the extent that SAR distributions do not overlap and can be treated independently, SAR compliance for simultaneous transmission is determined separately for each individual antenna.

In Airplay mode, the device uses same power and power control mechanism as Wi-Fi. Airplay is not supported in hotspot mode. Airplay utilize the same 802.11 modes, modulation, MIMO, Channel Bandwidth, etc. as Wi-Fi does. Therefore Airplay usage is categorized by the Wi-Fi SAR testing contained in Section 10.

The simultaneous transmission possibilities for this device are listed as below.

RF Exposure Condition	Item	Capable Transmit Configurations	
Head Body Worn Accessory Hotspot	1	WWAN & 5G OFF (CELLULAR ANTENNAS OFF)	+ (ANT5) Wi-Fi 5 GHz SISO + (ANT3) Bluetooth (P _{High})
	2		+ (ANT6) Wi-Fi 5 GHz SISO + (ANT3) Bluetooth (P _{High})
	3		+ Wi-Fi 5 GHz MIMO + (ANT3) Bluetooth (P _{High})
	4		+ (ANT5) Wi-Fi 5 GHz SISO + (ANT4) Bluetooth (P _{High})
	5		+ (ANT6) Wi-Fi 5 GHz SISO + (ANT4) Bluetooth (P _{High})
	6		+ Wi-Fi 5 GHz MIMO + (ANT4) Bluetooth (P _{High})
	7	WWAN & 5G ON (CELLULAR ANTENNAS ON)	+ (ANT3) Wi-Fi 2.4 GHz SISO
	8		+ (ANT4) Wi-Fi 2.4 GHz SISO
	9		+ Wi-Fi 2.4 GHz MIMO
	10		+ (ANT3) Bluetooth (P _{High})
	11		+ (ANT4) Bluetooth (P _{High})
	12		+ (ANT5) Wi-Fi 5 GHz SISO
	13		+ (ANT6) Wi-Fi 5 GHz SISO
	14		+ Wi-Fi 5 GHz MIMO
	15		+ (ANT5) Wi-Fi 5 GHz SISO + (ANT3) Bluetooth (P _{Low})
	16		+ (ANT6) Wi-Fi 5 GHz SISO + (ANT3) Bluetooth (P _{Low})
	17		+ Wi-Fi 5 GHz MIMO + (ANT3) Bluetooth (P _{Low})
	18		+ (ANT5) Wi-Fi 5 GHz SISO + (ANT4) Bluetooth (P _{Low})
	19		+ (ANT6) Wi-Fi 5 GHz SISO + (ANT4) Bluetooth (P _{Low})
	20		+ Wi-Fi 5 GHz MIMO + (ANT4) Bluetooth (P _{Low})

Note(s):

1. Wi-Fi 2.4GHz & Bluetooth cannot transmit simultaneously.
2. Wi-Fi 2.4GHz & Wi-Fi 5GHz cannot transmit simultaneously.
3. WWAN cannot transmit simultaneously.
4. Bluetooth P_{low} is used with Wi-Fi and WWAN antennas are active.
5. Bluetooth P_{high} is used when Wi-Fi antenna is active and WWAN antenna is inactive or with Wi-Fi inactive and WWAN antenna is active.
6. Bluetooth P_{standalone} is used with Wi-Fi and WWAN antennas are inactive.
7. Wi-Fi SISO mode SAR result can also represent for MIMO mode SAR and is used for MIMO mode simultaneous transmission analysis because antennas are not overlapping and the MIMO mode maximum power is equal or less than SISO mode.
8. 5G NR only supported NSA mode.
9. For EN-DC mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure from 4G(LTE) and time-averaged RF exposure from 5G NR. Smart Transmit algorithm controls the total RF exposure from both 4G and 5G NR to not exceed FCC limit. Therefore, simultaneous transmission compliance between 4G+5G NR operation is demonstrated in the Part 2 Report during algorithm validation. In Part 1 Report, simultaneous transmission compliance was evaluated individually with other Radios (WLAN or BT) using one of 4G or 5G NR.

12.1. Sum of the SAR for WWAN(CBE) Cell-on ANT4 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (CBE) ANT4	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{High}) ANT3	BT(P _{High}) ANT4				
Head	Left Touch	0.886	0.275	0.457	0.227	0.358	1.161	0.732	0.684	0.585
	Left Tilt	0.496	0.275	0.308	0.079	0.250	0.771	0.583	0.387	0.328
	Right Touch	0.200	0.275	0.308	0.115	0.107	0.475	0.583	0.423	0.222
	Right Tilt	0.162	0.275	0.308	0.117	0.049	0.437	0.583	0.425	0.166
Body-worn & Hptspot	Rear	0.899	0.254	0.401	0.263	0.273	1.153	0.656	0.664	0.536
	Front	0.341	0.254	0.401	0.234	0.109	0.595	0.656	0.635	0.343
Hotspot	Edge 1	0.093		0.401		0.086	0.093	0.401	0.401	0.086
	Edge 2	0.869		0.549		0.328	0.869	0.549	0.549	0.328
	Edge 3		0.254		0.050		0.254	0.254	0.050	0.050
	Edge 4		0.511		0.297		0.511	0.511	0.297	0.297
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (CBE) ANT4	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.886	0.052	0.353	0.052	0.089	0.990	1.027	1.291	1.329
	Left Tilt	0.496	0.052	0.353	0.015	0.062	0.563	0.610	0.864	0.911
	Right Touch	0.200	0.052	0.353	0.029	0.013	0.280	0.264	0.582	0.566
	Right Tilt	0.162	0.052	0.356	0.029	0.014	0.242	0.227	0.547	0.531
Body-worn & Hptspot	Rear	0.899	0.457	0.451	0.058	0.060	1.414	1.415	1.409	1.410
	Front	0.341	0.457	0.451	0.053	0.017	0.850	0.815	0.845	0.809
Hotspot	Edge 1	0.093		0.256		0.026	0.093	0.119	0.349	0.375
	Edge 2	0.869				0.075	0.869	0.944	0.869	0.944
	Edge 3		0.125		0.011		0.136	0.125	0.011	
	Edge 4		0.125	0.256	0.082		0.207	0.125	0.339	0.256

12.2. Sum of the SAR for WWAN(CBE) Cell-on ANT7 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (CBE) ANT7	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{High}) ANT3	BT(P _{High}) ANT4				
Head	Left Touch	0.196	0.275	0.457	0.227	0.358	0.471	0.653	0.423	0.554
	Left Tilt	0.085	0.275	0.308	0.079	0.250	0.360	0.393	0.164	0.335
	Right Touch	0.203	0.275	0.308	0.115	0.107	0.478	0.511	0.318	0.310
	Right Tilt	0.080	0.275	0.308	0.117	0.049	0.355	0.388	0.197	0.129
Body-worn & Hptspot	Rear	0.878	0.254	0.401	0.263	0.273	1.132	1.279	1.141	1.151
	Front	0.433	0.254	0.401	0.234	0.109	0.687	0.834	0.667	0.542
Hotspot	Edge 1			0.401		0.086		0.401		0.086
	Edge 2	0.750		0.549		0.328	0.750	1.299	0.750	1.078
	Edge 3	0.314	0.254		0.050		0.568	0.314	0.364	0.314
	Edge 4		0.511		0.297		0.511		0.297	
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (CBE) ANT7	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.196	0.052	0.353	0.052	0.089	0.300	0.337	0.601	0.639
	Left Tilt	0.085	0.052	0.353	0.015	0.062	0.152	0.199	0.453	0.500
	Right Touch	0.203	0.052	0.353	0.029	0.013	0.283	0.267	0.585	0.569
	Right Tilt	0.080	0.052	0.356	0.029	0.014	0.160	0.145	0.465	0.449
Body-worn & Hptspot	Rear	0.878	0.457	0.451	0.058	0.060	1.393	1.394	1.388	1.389
	Front	0.433	0.457	0.451	0.053	0.017	0.942	0.907	0.937	0.901
Hotspot	Edge 1			0.256		0.026		0.026	0.256	0.282
	Edge 2	0.750				0.075	0.750	0.825	0.750	0.825
	Edge 3	0.314	0.125		0.011		0.450	0.439	0.325	0.314
	Edge 4		0.125	0.256	0.082		0.207	0.125	0.339	0.256

12.3. Sum of the SAR for WWAN(CBE) Cell-on ANT8 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (CBE) ANT8	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{High}) ANT3	BT(P _{High}) ANT4				
Head	Left Touch	0.442	0.275	0.457	0.227	0.358	0.717	0.899	0.669	0.800
	Left Tilt	0.427	0.275	0.308	0.079	0.250	0.702	0.735	0.506	0.677
	Right Touch	0.919	0.275	0.308	0.115	0.107	1.194	1.227	1.034	1.026
	Right Tilt	0.716	0.275	0.308	0.117	0.049	0.991	1.024	0.833	0.765
Body-worn & Hptspot	Rear	0.508	0.254	0.401	0.263	0.273	0.762	0.909	0.771	0.781
	Front	0.290	0.254	0.401	0.234	0.109	0.544	0.691	0.524	0.399
Hotspot	Edge 1	0.296		0.401		0.086	0.296	0.697	0.296	0.382
	Edge 2			0.549		0.328		0.549		0.328
	Edge 3		0.254		0.050		0.254		0.050	
	Edge 4	0.707	0.511		0.297		1.218	0.707	1.004	0.707

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (CBE) ANT8	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.442	0.052	0.353	0.052	0.089	0.546	0.583	0.847	0.885
	Left Tilt	0.427	0.052	0.353	0.015	0.062	0.494	0.541	0.795	0.842
	Right Touch	0.919	0.052	0.353	0.029	0.013	0.999	0.983	1.301	1.285
	Right Tilt	0.716	0.052	0.356	0.029	0.014	0.796	0.781	1.101	1.085
Body-worn & Hptspot	Rear	0.508	0.457	0.451	0.058	0.060	1.023	1.024	1.018	1.019
	Front	0.290	0.457	0.451	0.053	0.017	0.799	0.764	0.794	0.758
Hotspot	Edge 1	0.296		0.256		0.026	0.296	0.322	0.552	0.578
	Edge 2					0.075		0.075		0.075
	Edge 3		0.125		0.011		0.136	0.125	0.011	
	Edge 4	0.707	0.125	0.256	0.082		0.914	0.832	1.046	0.963

12.4. Sum of the SAR for WWAN(CBE) Cell-on ANT9 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (CBE) ANT9	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{High}) ANT3	BT(P _{High}) ANT4				
Head	Left Touch	0.328	0.275	0.457	0.227	0.358	0.603	0.785	0.555	0.686
	Left Tilt	0.041	0.275	0.308	0.079	0.250	0.316	0.349	0.120	0.291
	Right Touch	0.062	0.275	0.308	0.115	0.107	0.337	0.370	0.177	0.169
	Right Tilt	0.021	0.275	0.308	0.117	0.049	0.296	0.329	0.138	0.070
Body-worn & Hptspot	Rear	0.637	0.254	0.401	0.263	0.273	0.891	1.038	0.900	0.910
	Front	0.548	0.254	0.401	0.234	0.109	0.802	0.949	0.782	0.657
Hotspot	Edge 1			0.401		0.086		0.401		0.086
	Edge 2			0.549		0.328		0.549		0.328
	Edge 3	0.278	0.254		0.050		0.532	0.278	0.328	0.278
	Edge 4	0.839	0.511		0.297		1.350	0.839	1.136	0.839

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (CBE) ANT9	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.328	0.052	0.353	0.052	0.089	0.432	0.469	0.733	0.771
	Left Tilt	0.041	0.052	0.353	0.015	0.062	0.108	0.155	0.409	0.456
	Right Touch	0.062	0.052	0.353	0.029	0.013	0.142	0.126	0.444	0.428
	Right Tilt	0.021	0.052	0.356	0.029	0.014	0.101	0.086	0.406	0.390
Body-worn & Hptspot	Rear	0.637	0.457	0.451	0.058	0.060	1.152	1.153	1.147	1.148
	Front	0.548	0.457	0.451	0.053	0.017	1.057	1.022	1.052	1.016
Hotspot	Edge 1			0.256		0.026		0.026	0.256	0.282
	Edge 2					0.075		0.075		0.075
	Edge 3	0.278	0.125		0.011		0.414	0.403	0.289	0.278
	Edge 4	0.839	0.125	0.256	0.082		1.046	0.964	1.178	1.095

Note(s):

As the sum of the SAR for any simultaneous transmission condition never exceeded 1.6 W/kg no further evaluation was required.

Appendixes

Refer to separated files for the following appendixes.

Appendix A: SAR Setup Photos

Appendix B: SAR System Check Plots

Appendix C: SAR Highest Test Plots

Appendix D: SAR Tissue Ingredients

Appendix E: SAR Probe Certificates

Appendix F: SAR Dipole Certificates

END OF REPORT