


BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

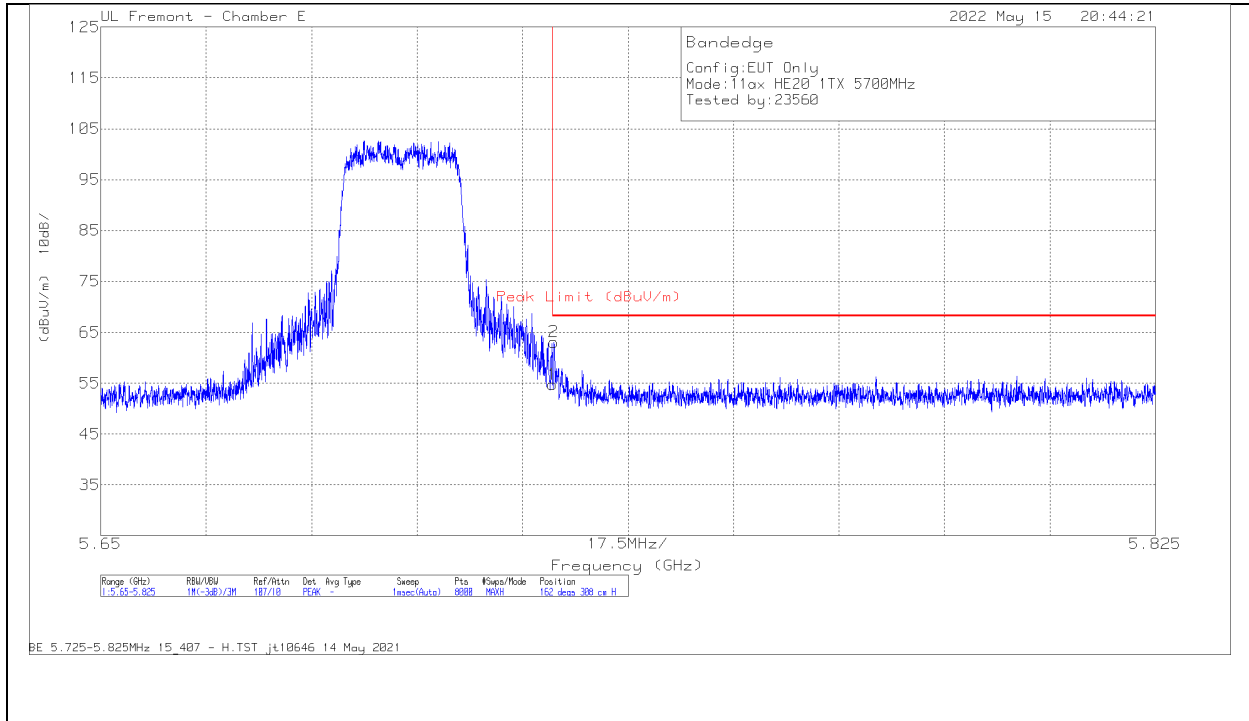

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.4	Pk	34.7	-20.3	0	54.8	68.2	-13.4	162	308	H
2	5.725217	48.69	Pk	34.7	-20.3	0	63.09	68.2	-5.11	162	308	H

Pk - Peak detector

VERTICAL RESULT

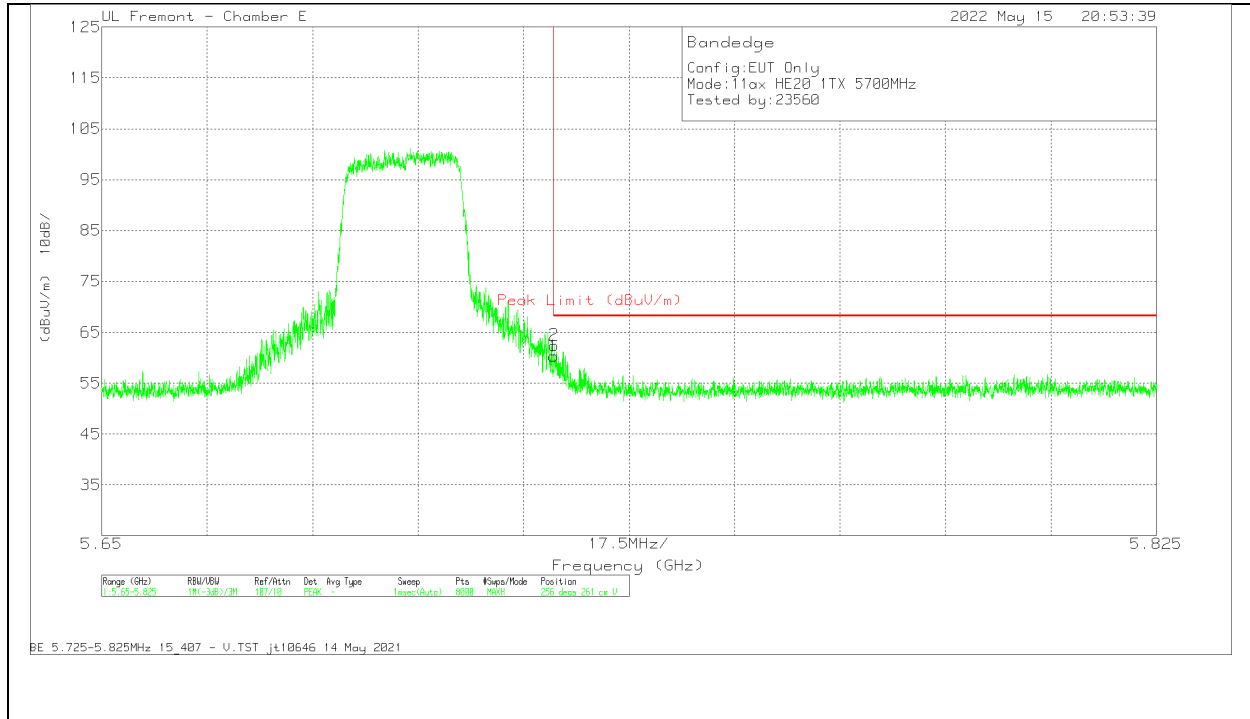


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.88	Pk	34.7	-20.3	60.28	68.2	-7.92	256	261	V
2	5.725085	48.07	Pk	34.7	-20.3	62.47	68.2	-5.73	256	261	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

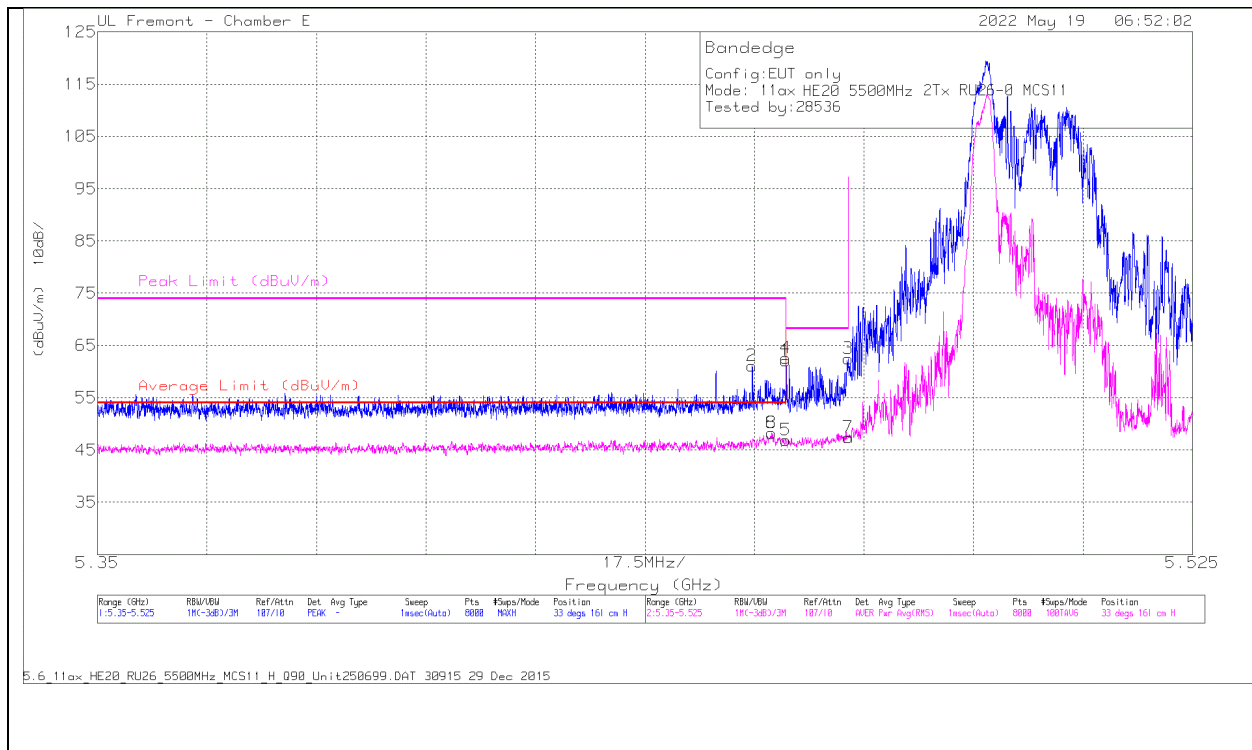


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	48.37	Pk	34.4	-20.7	0	62.07	-	-	74	-11.93	33	161	H
2	* 5.454642	47.36	Pk	34.4	-20.7	0	61.06	-	-	74	-12.94	33	161	H
5	* 5.46	32.72	RMS	34.4	-20.7	.46	46.88	54	-7.12	-	-	33	161	H
6	* 5.457749	34.14	RMS	34.4	-20.7	.46	48.3	54	-5.7	-	-	33	161	H
4	5.460024	48.87	Pk	34.4	-20.7	0	62.57	-	-	68.2	-5.63	33	161	H
3	5.47	48.79	Pk	34.4	-20.7	0	62.49	-	-	68.2	-5.71	33	161	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

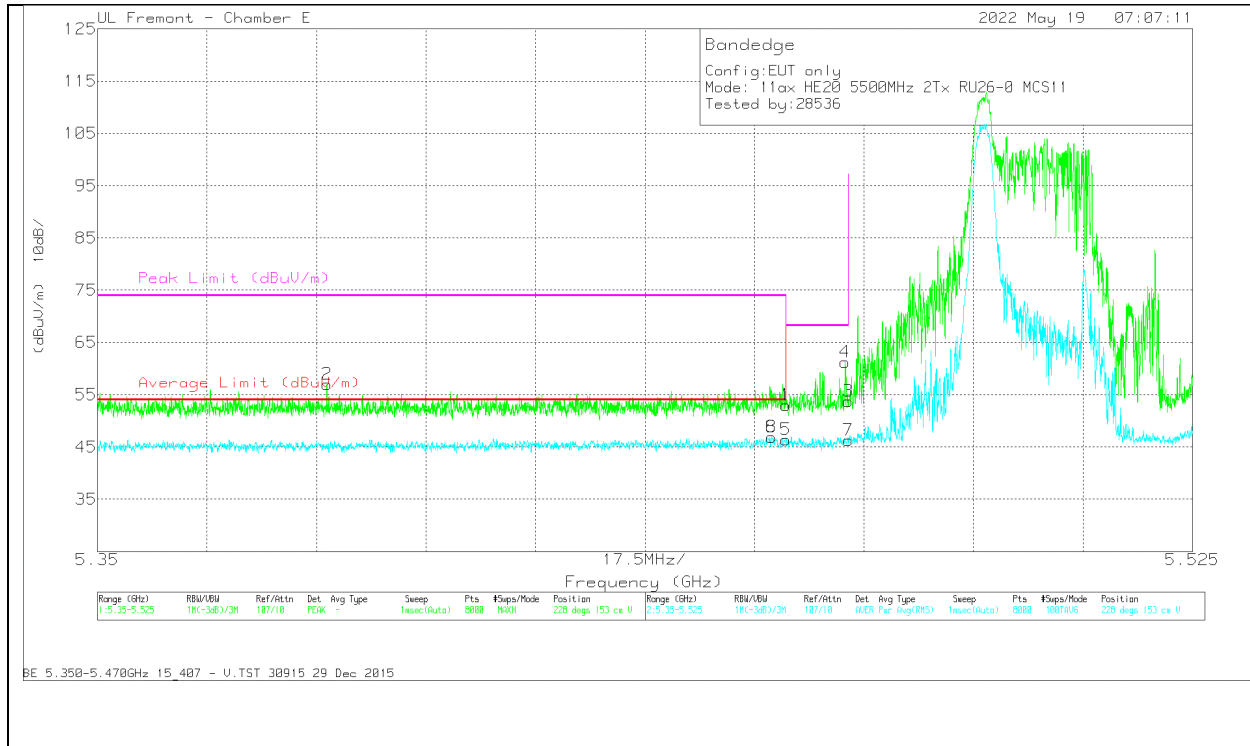

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.33	Pk	34.4	-20.7	0	53.03	-	-	74	-20.97	228	153	V
2	* 5.386646	43.34	Pk	34.5	-20.8	0	57.04	-	-	74	-16.96	228	153	V
5	* 5.46	32.23	RMS	34.4	-20.7	.46	46.39	54	-7.61	-	-	228	153	V
6	* 5.457749	32.69	RMS	34.4	-20.7	.46	46.85	54	-7.15	-	-	228	153	V
4	5.469476	47.54	Pk	34.4	-20.7	0	61.24	-	-	68.2	-6.96	228	153	V
3	5.47	40.07	Pk	34.4	-20.7	0	53.77	-	-	68.2	-14.43	228	153	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

2TX Antenna 6 + Antenna 5: 26-Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

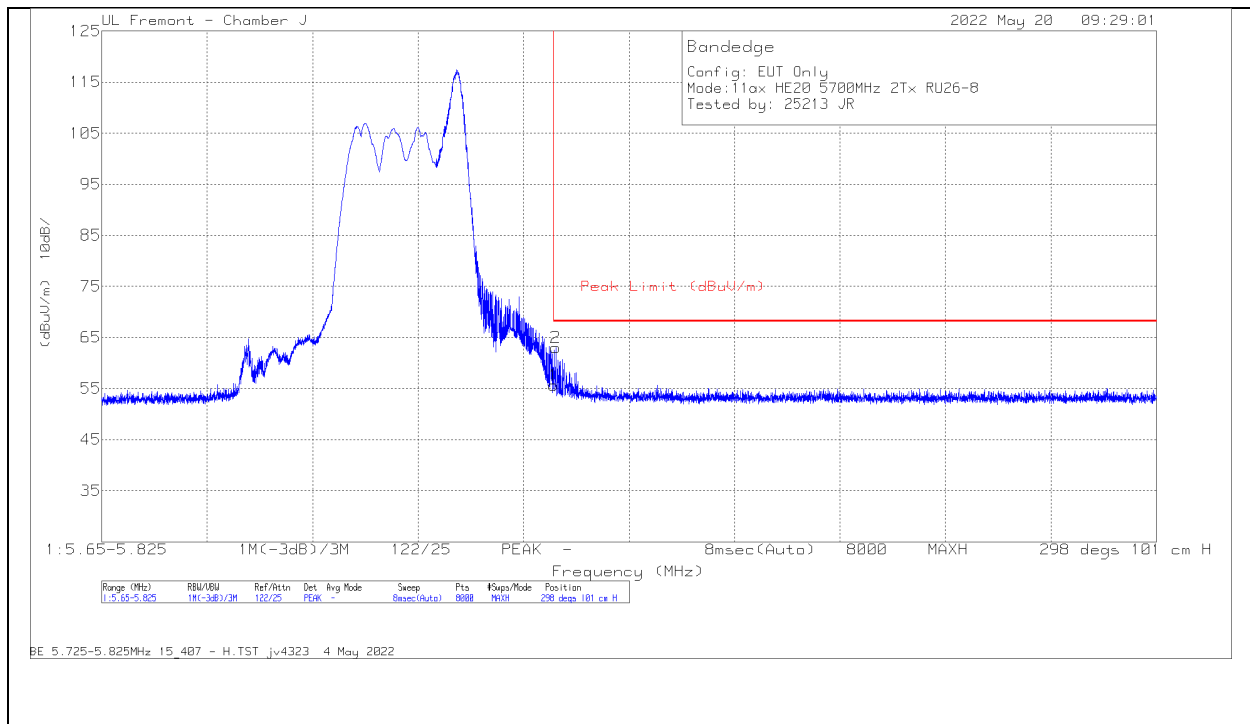

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/Filt er/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	58.38	Pk	34.6	-37.3	0	55.68	68.2	-12.52	298	101	H
2	5725.326	65.66	Pk	34.6	-37.3	0	62.96	68.2	-5.24	298	101	H

Pk - Peak detector

VERTICAL RESULT

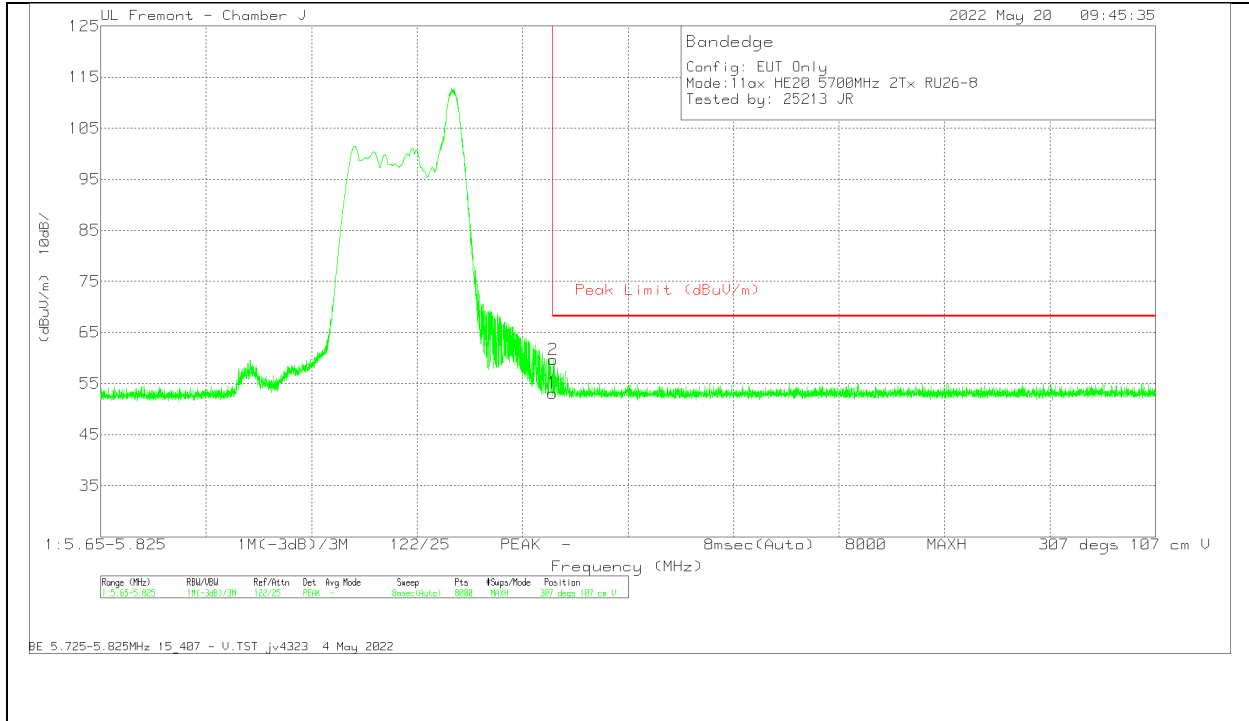


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/Fit or/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	55.82	Pk	34.6	-37.3	0	53.12	68.2	-15.08	307	107	V
2	5725.085	62.44	Pk	34.6	-37.3	0	59.74	68.2	-8.46	307	107	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

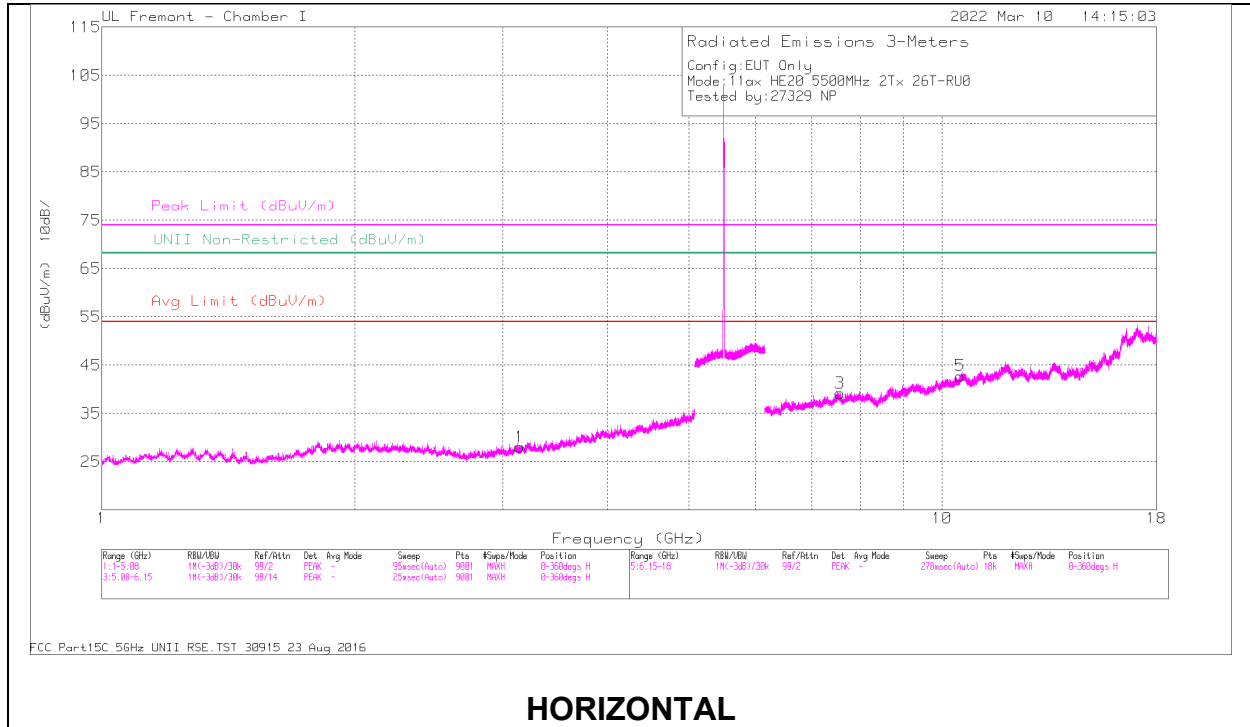

HORIZONTAL

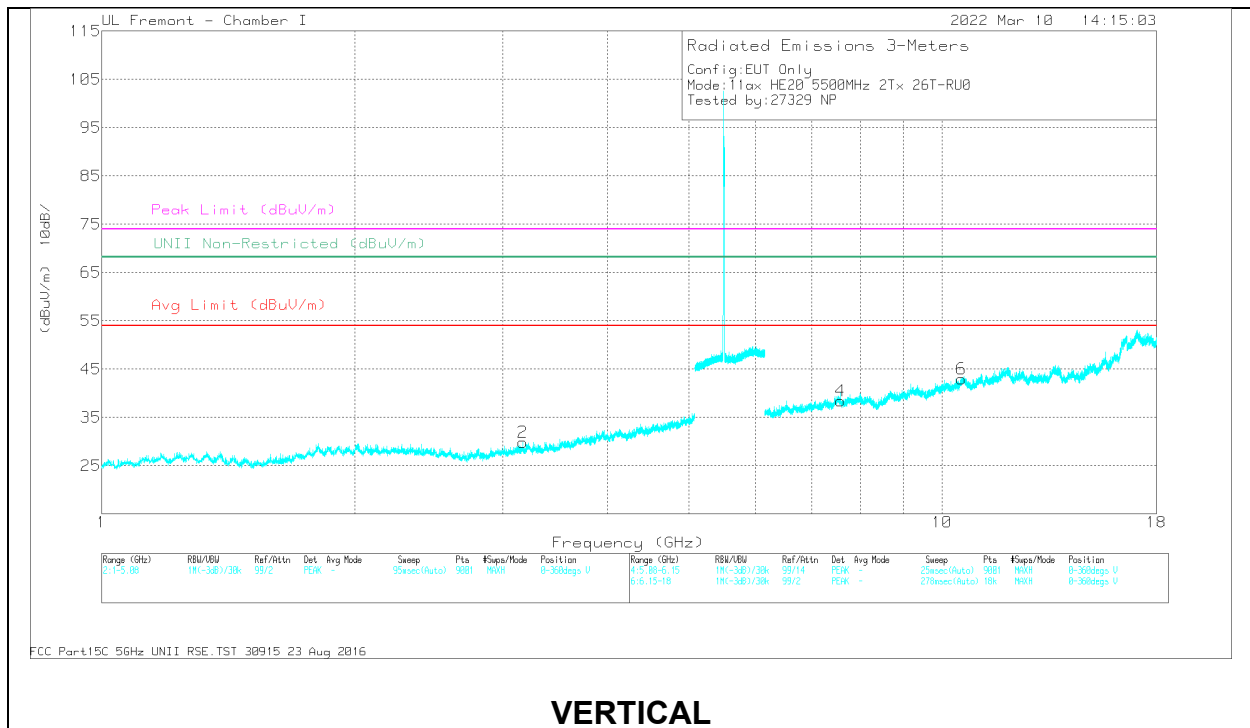

VERTICAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/CbI/F Itr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.1431	33.13	PK-U	32.7	-28.3	37.53	-	-	-	-	68.2	-30.67	210	179	H
2	3.1726	33.41	PK-U	32.7	-27.8	38.31	-	-	-	-	68.2	-29.89	166	201	V
3	* 7.567	31.44	PK-U	35.7	-18.7	48.44	-	-	74	-25.56	-	-	241	118	H
	* 7.5664	19.69	ADR	35.7	-18.6	36.79	54	-17.21	-	-	-	-	241	118	H
5	10.5106	31.71	PK-U	37.2	-16.7	52.21	-	-	-	-	68.2	-15.99	350	250	H
4	* 7.5781	31.47	PK-U	35.7	-18.9	48.27	-	-	74	-25.73	-	-	193	146	V
	* 7.5790	19.92	ADR	35.7	-18.9	36.72	54	-17.28	-	-	-	-	193	146	V
6	10.5587	31.02	PK-U	37.2	-16.5	51.72	-	-	-	-	68.2	-16.48	23	312	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

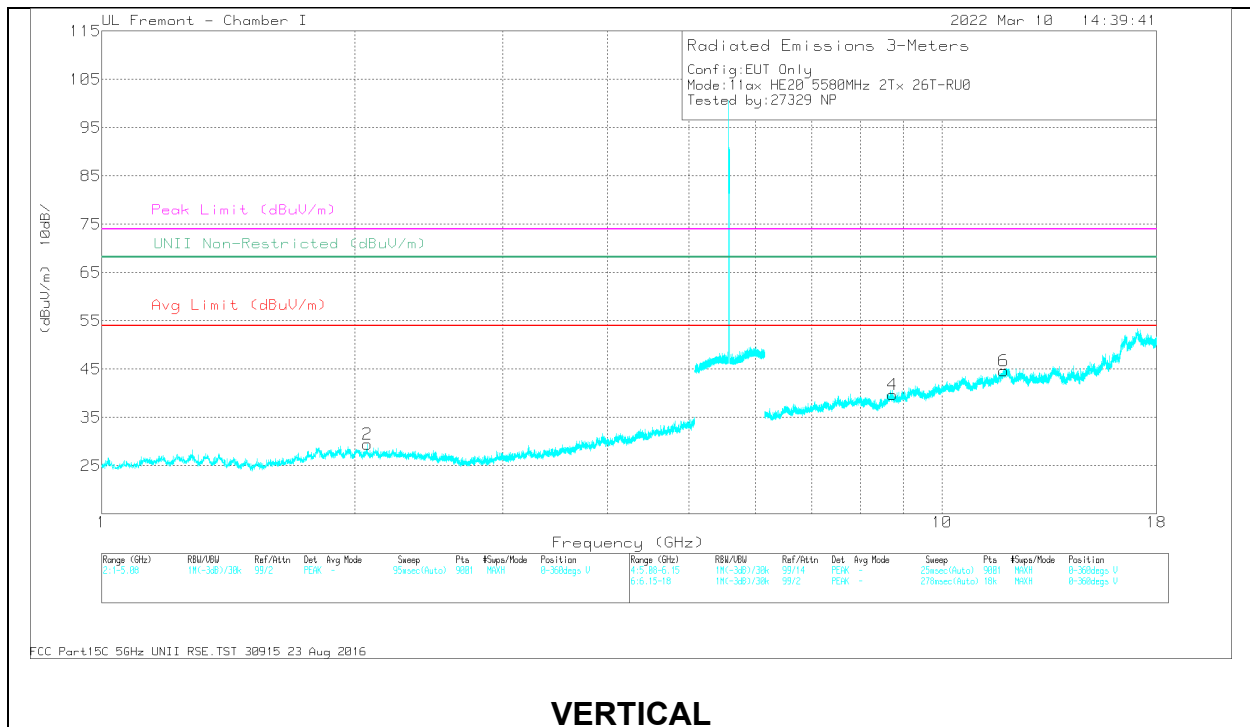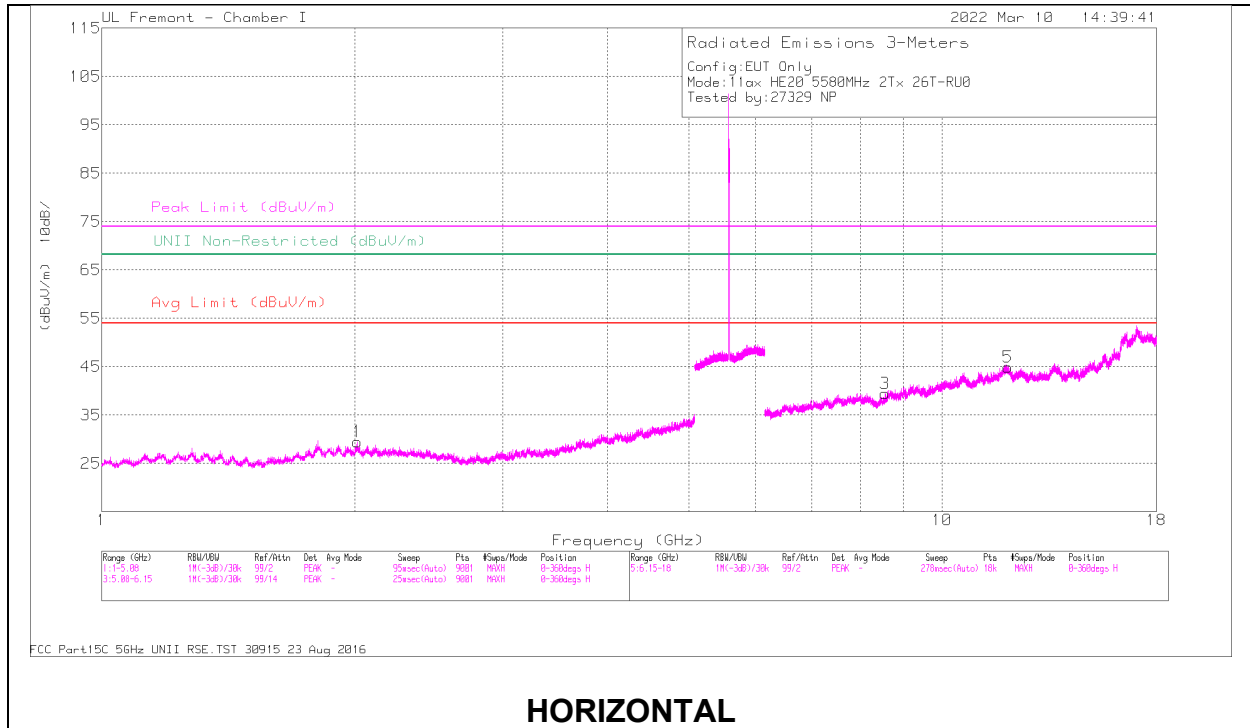

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 208805 (dB/m)	Amp/Cbl/Ft r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.0165	36.9	PK-U	31.2	-30.1	38	-	-	-	-	68.2	-30.2	322	110	H
2	2.0701	38.29	PK-U	31.1	-30.1	39.29	-	-	-	-	68.2	-28.91	319	133	V
3	8.5535	31.16	PK-U	35.7	-18.6	48.26	-	-	-	-	68.2	-19.94	317	114	H
5	* 11.9795	31.41	PK-U	38.5	-16.3	53.61	-	-	74	-20.39	-	-	272	159	H
	* 11.9817	20	ADR	38.5	-16.2	42.3	54	-11.7	-	-	-	-	272	159	H
4	8.7287	31.6	PK-U	35.8	-17.7	49.7	-	-	-	-	68.2	-18.5	178	310	V
6	* 11.8491	31.86	PK-U	38.5	-16.6	53.76	-	-	74	-20.24	-	-	180	196	V
	* 11.8470	20.17	ADR	38.5	-16.6	42.07	54	-11.93	-	-	-	-	180	196	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

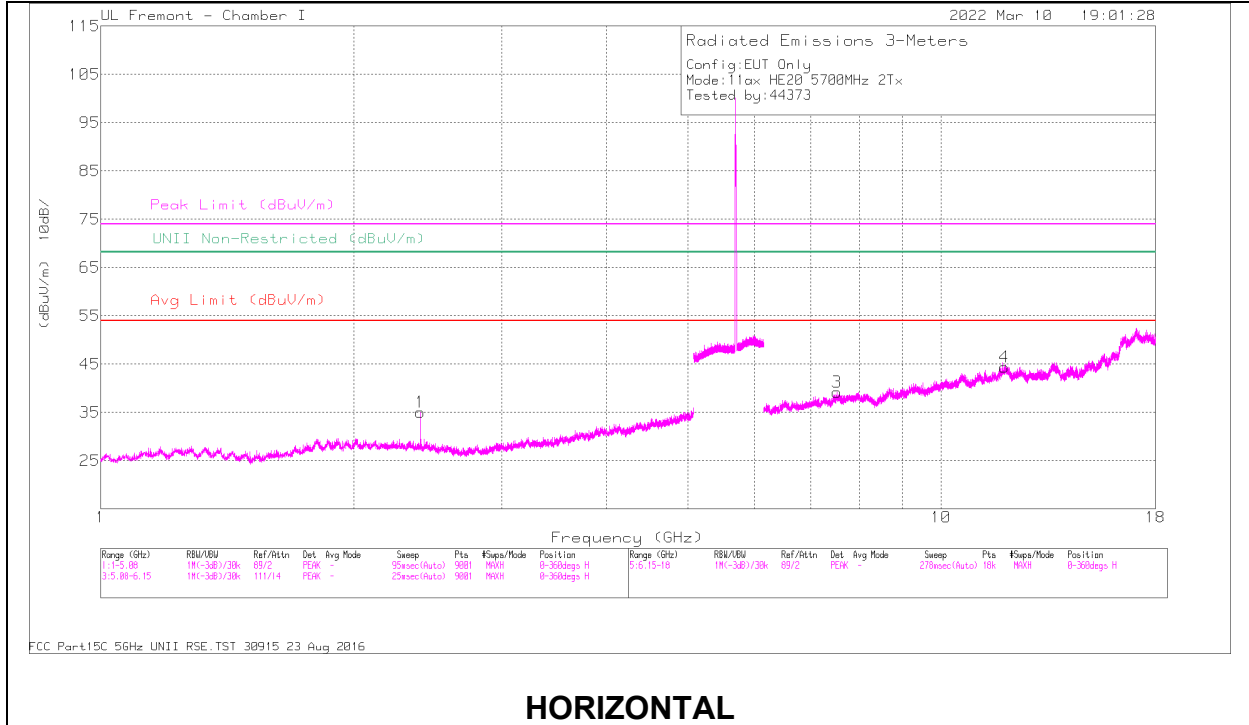

HORIZONTAL

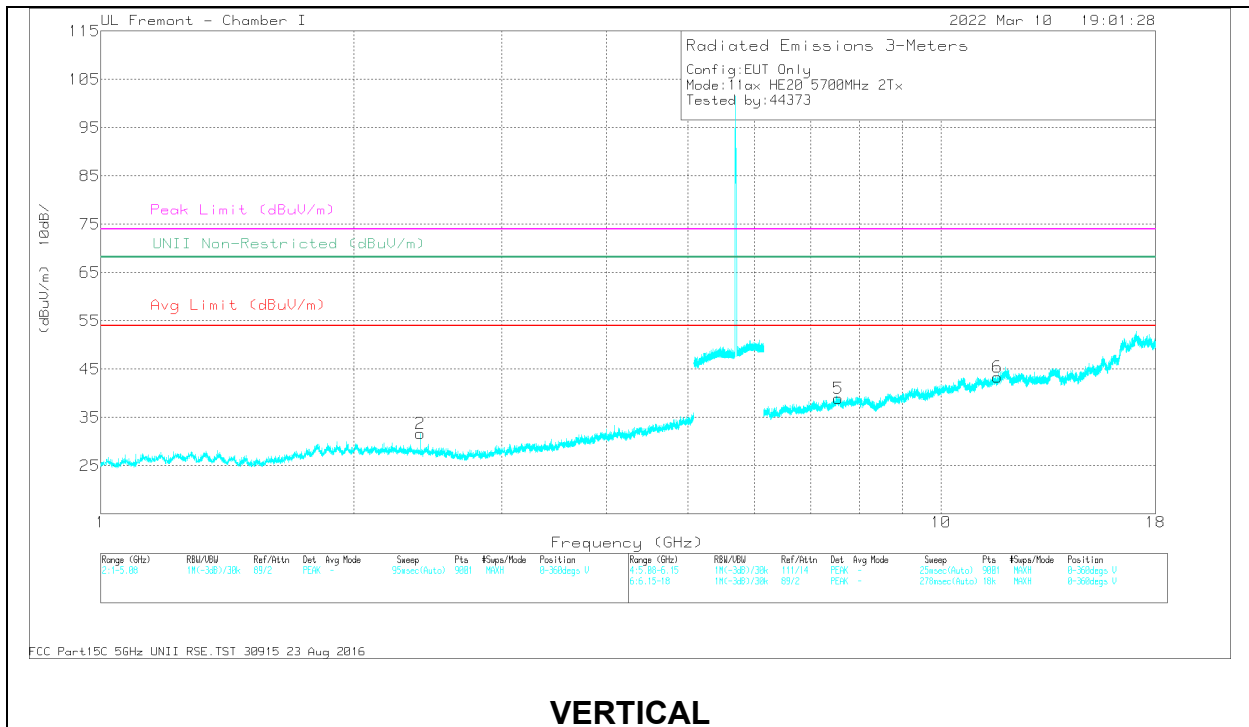

VERTICAL


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 208605 (dB/m)	Amp/CbI/F Itri/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.40167	36.7	PK-U	31.9	-29.8	38.8	-	-	-	-	68.2	-29.4	40	153	H
2	2.402169	37.41	PK-U	31.9	-29.8	39.51	-	-	-	-	68.2	-28.69	8	135	V
3	* 7.525517	32.28	PK-U	35.7	-18.7	49.28	-	-	74	-24.72	-	-	82	115	H
	* 7.523708	19.91	ADR	35.7	-18.7	36.91	54	-17.09	-	-	-	-	82	115	H
4	* 11.895086	31.55	PK-U	38.5	-16.7	53.35	-	-	74	-20.65	-	-	73	111	H
	* 11.892634	20.23	ADR	38.5	-16.6	42.13	54	-11.87	-	-	-	-	73	111	H
5	* 7.54941	31.66	PK-U	35.7	-18.8	48.56	-	-	74	-25.44	-	-	120	189	V
	* 7.548694	19.96	ADR	35.7	-18.8	36.86	54	-17.14	-	-	-	-	120	189	V
6	* 11.676517	30.91	PK-U	38.4	-16.5	52.81	-	-	74	-21.19	-	-	168	192	V
	* 11.679468	19.65	ADR	38.4	-16.6	41.45	54	-12.55	-	-	-	-	168	192	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

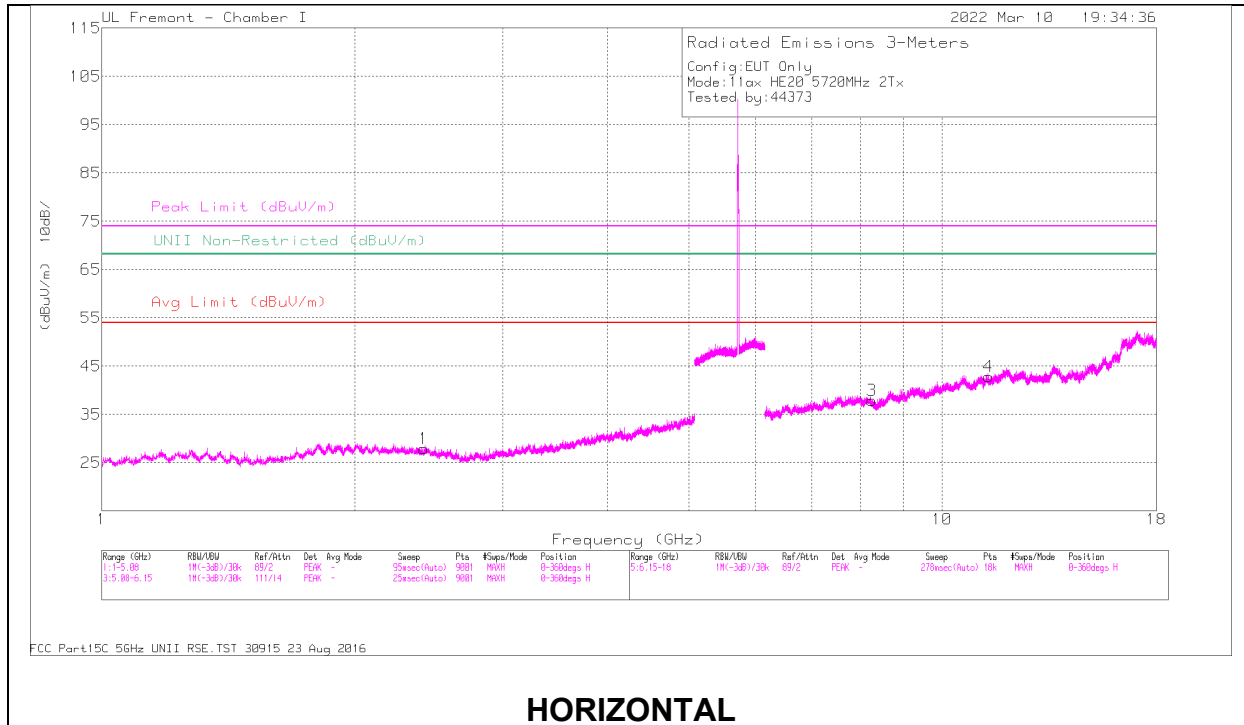

HORIZONTAL

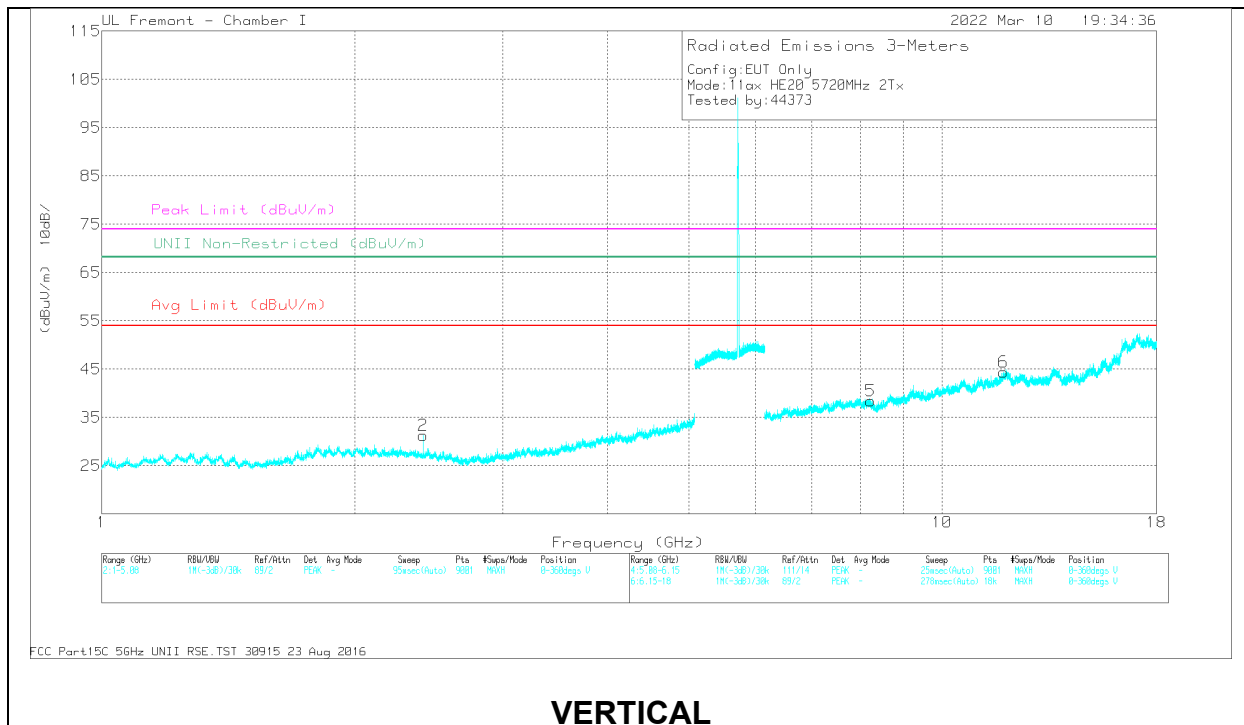

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dBm)	Amp/Cb/F Itr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4182	36.49	PK-U	32	-29.8	38.69	-	-	-	-	68.2	-29.51	122	314	H
2	2.41277	36.25	PK-U	32	-29.8	38.45	-	-	-	-	68.2	-29.75	217	309	V
3	* 8.2525	31.18	PK-U	35.6	-18.5	48.28	-	-	74	-25.72	-	-	231	218	H
	* 8.2515	19.76	ADR	35.6	-18.5	36.86	54	-17.14	-	-	-	-	231	218	H
4	* 11.3547	31.11	PK-U	38	-16.6	52.51	-	-	74	-21.49	-	-	159	115	H
	* 11.3531	19.46	ADR	38	-16.5	40.96	54	-13.04	-	-	-	-	159	115	H
5	* 8.2199	31.51	PK-U	35.6	-18.5	48.61	-	-	74	-25.39	-	-	171	157	V
	* 8.2204	19.8	ADR	35.6	-18.5	36.9	54	-17.1	-	-	-	-	171	157	V
6	* 11.8351	31.48	PK-U	38.5	-16.3	53.68	-	-	74	-20.32	-	-	153	127	V
	* 11.8327	19.98	ADR	38.5	-16.2	42.28	54	-11.72	-	-	-	-	153	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 6 + Antenna 5: SU, Single User

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

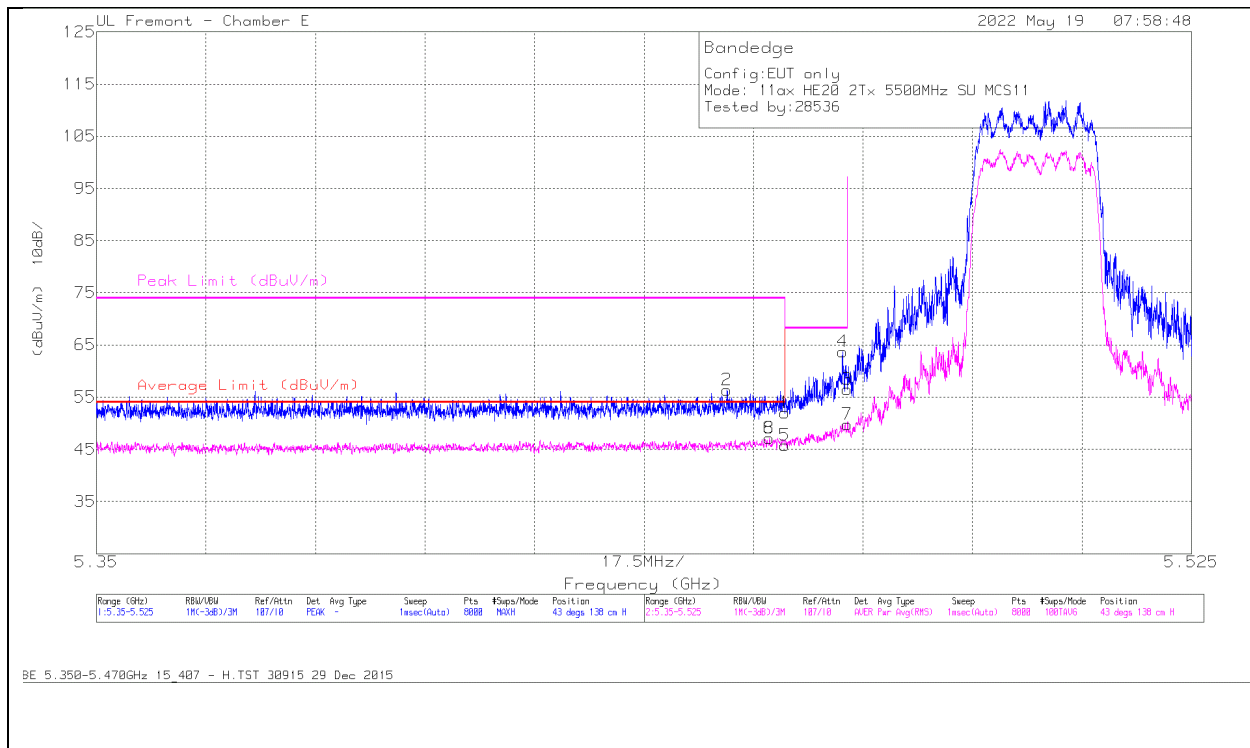


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20dB/90 ACF (dB/m)	Amp/Cbl/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.32	Pk	34.4	-20.7	0	52.02	-	-	74	-21.98	43	138	H
2	* 5.450792	42.62	Pk	34.4	-20.7	0	56.32	-	-	74	-17.68	43	138	H
5	* 5.46	31.44	RMS	34.4	-20.7	.59	45.73	54	-8.27	-	-	43	138	H
6	* 5.45753	32.82	RMS	34.4	-20.7	.59	47.11	54	-6.89	-	-	43	138	H
4	5.469235	49.99	Pk	34.4	-20.7	0	63.69	-	-	68.2	-4.51	43	138	H
3	5.47	42.77	Pk	34.4	-20.7	0	56.47	-	-	68.2	-11.73	43	138	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

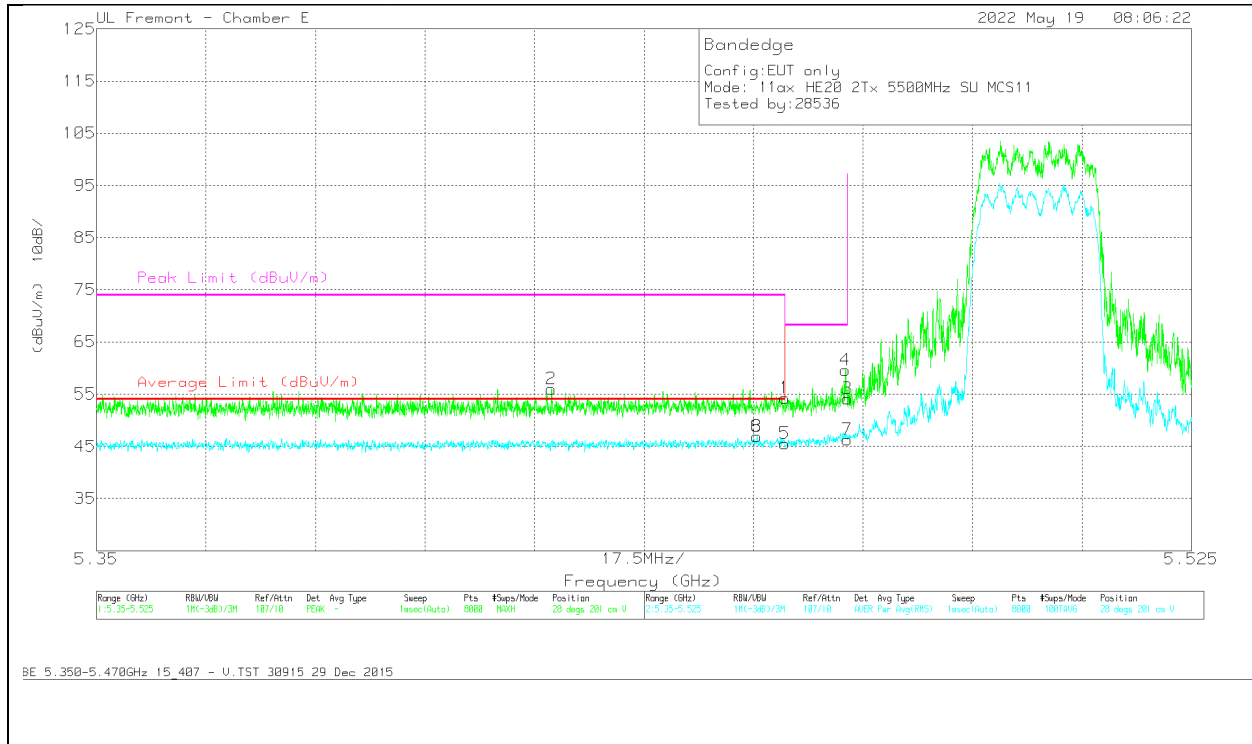


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.57	Pk	34.4	-20.7	0	54.27	-	-	74	-19.73	28	201	V
2	* 5.422722	42.33	Pk	34.4	-20.7	0	56.03	-	-	74	-17.97	28	201	V
5	* 5.46	31.12	RMS	34.4	-20.7	.59	45.41	54	-8.59	-	-	28	201	V
6	* 5.455583	32.5	RMS	34.4	-20.7	.59	46.79	54	-7.21	-	-	28	201	V
4	5.469716	45.95	Pk	34.4	-20.7	0	59.65	-	-	68.2	-8.55	28	201	V
3	5.47	40.36	Pk	34.4	-20.7	0	54.06	-	-	68.2	-14.14	28	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

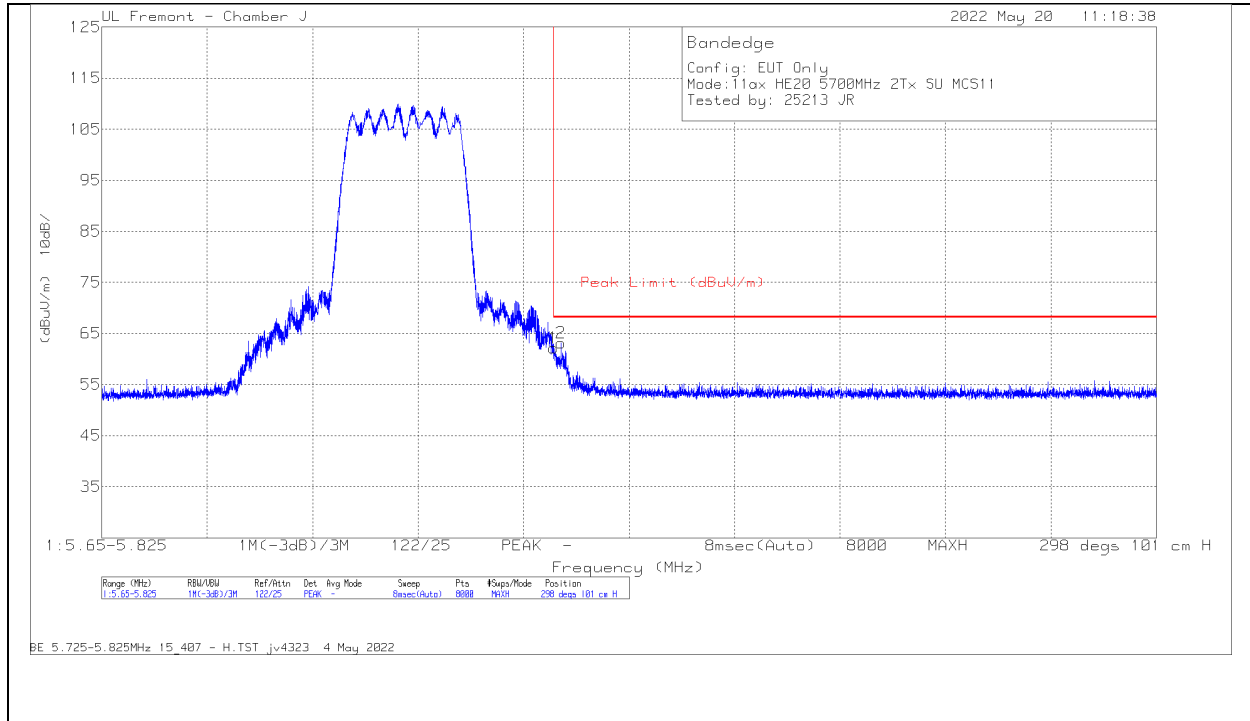

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/Fit err/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	64.81	Pk	34.6	-37.3	0	62.11	68.2	-6.09	298	101	H
2	5726.201	65.83	Pk	34.6	-37.3	0	63.13	68.2	-5.07	298	101	H

Pk - Peak detector


VERTICAL RESULT

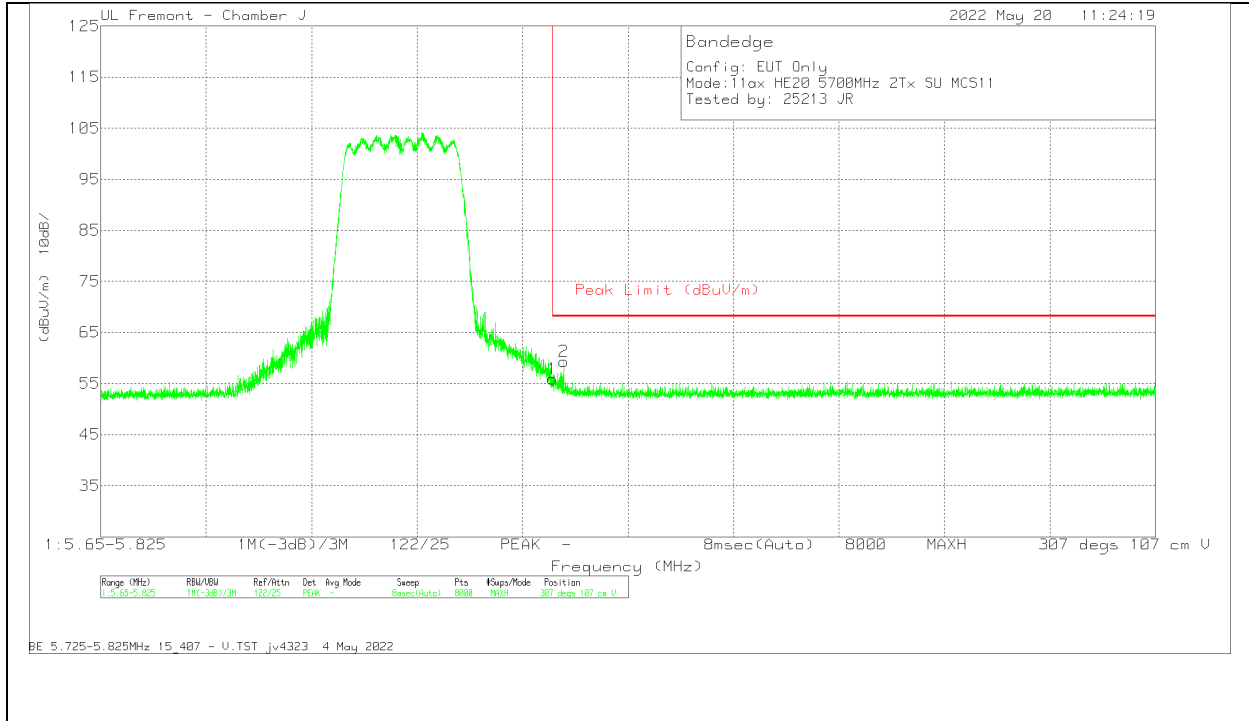


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 206806 (dB/m)	Amp/Cbl/Fit or/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	58.63	Pk	34.6	-37.3	0	55.93	68.2	-12.27	307	107	V
2	5726.792	61.99	Pk	34.6	-37.3	0	59.29	68.2	-8.91	307	107	V

Pk - Peak detector

LOW CHANNEL RESULTS

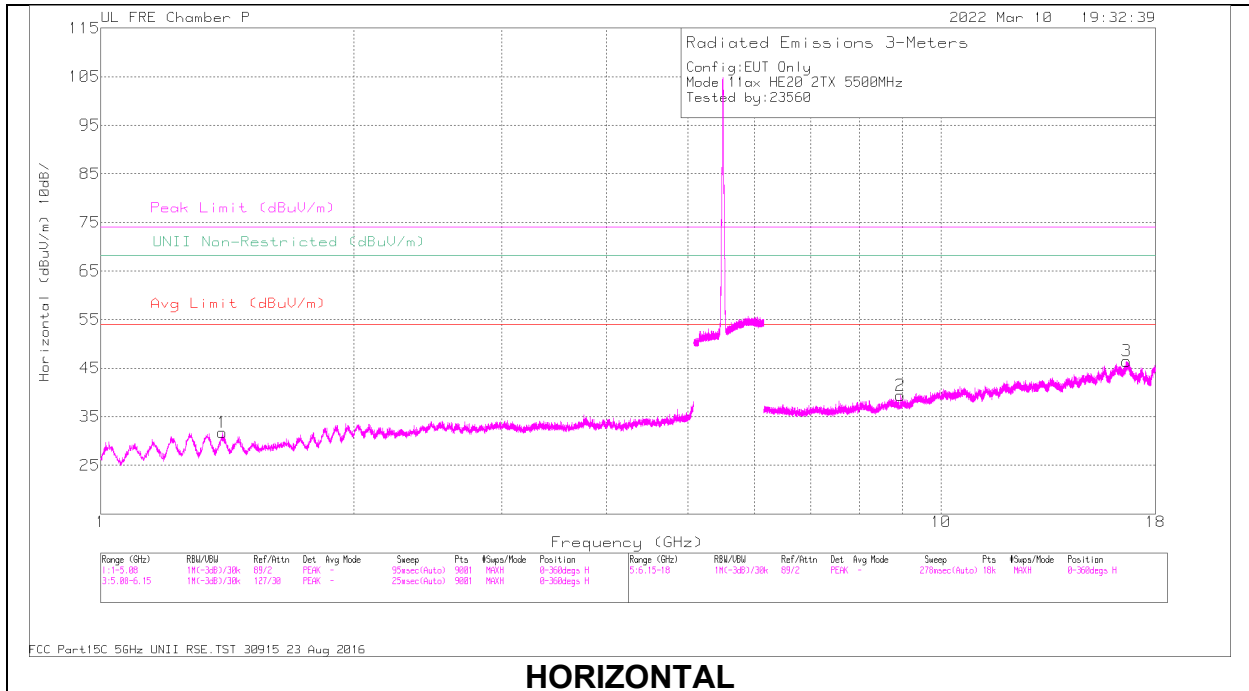

HORIZONTAL

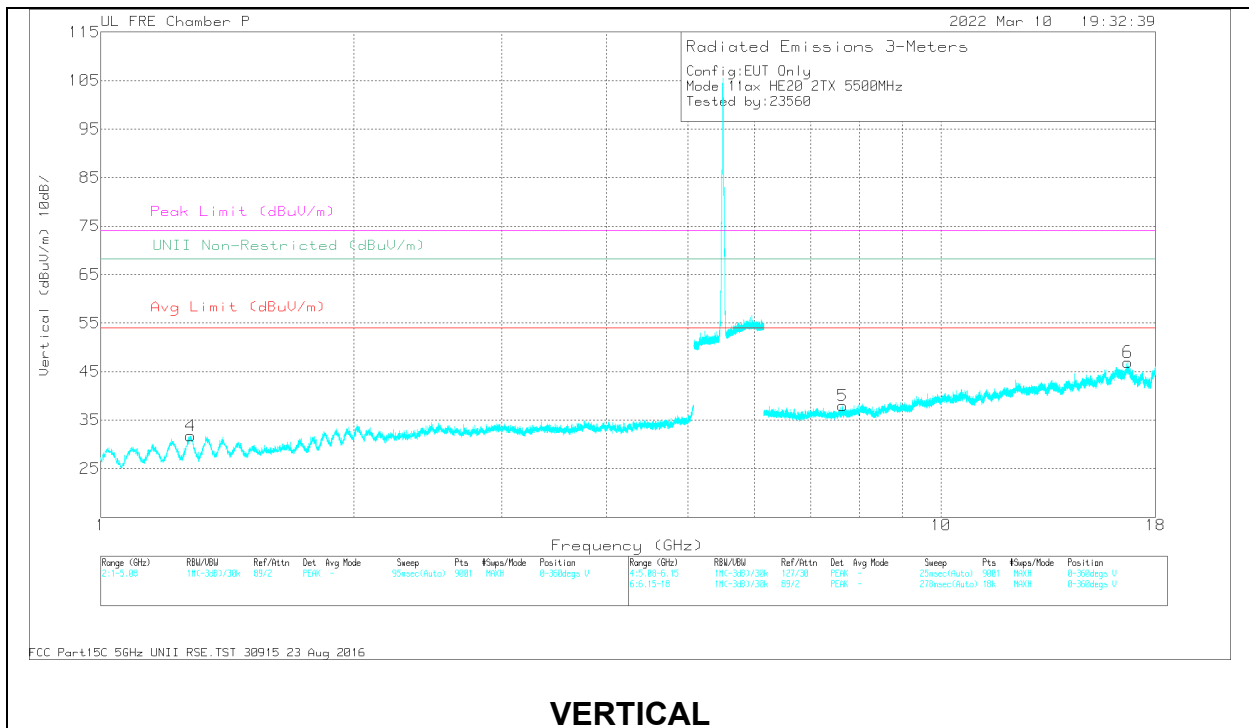



VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 41112 (dBm)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	*1.2782	45.19	ADR	29.4	-44.4	30.19	54	-23.81	-	-	-	-	137	240	V
	*1.278	57.34	PK-U	29.4	-44.4	42.34	-	-	74	-31.66	-	-	137	240	V
1	*1.3962	56.76	PK-U	29	-44.1	41.66	-	-	74	-32.34	-	-	45	100	H
	*1.3978	44.52	ADR	29	-44.1	29.42	54	-24.58	-	-	-	-	45	100	H
5	*7.6323	46.46	PK-U	35.9	-35.5	46.86	-	-	74	-27.14	-	-	333	224	V
	*7.6354	35.16	ADR	35.8	-35.6	35.36	54	-18.64	-	-	-	-	333	224	V
	8.9466	46.79	PK-U	36.4	-35.5	47.69	-	-	-	-	68.2	-20.51	62	155	H
3	16.6279	44.34	PK-U	40.9	-29.4	55.84	-	-	-	-	68.2	-12.36	315	324	H
6	16.6935	44.52	PK-U	40.9	-29.2	56.22	-	-	-	-	68.2	-11.98	289	173	V

PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

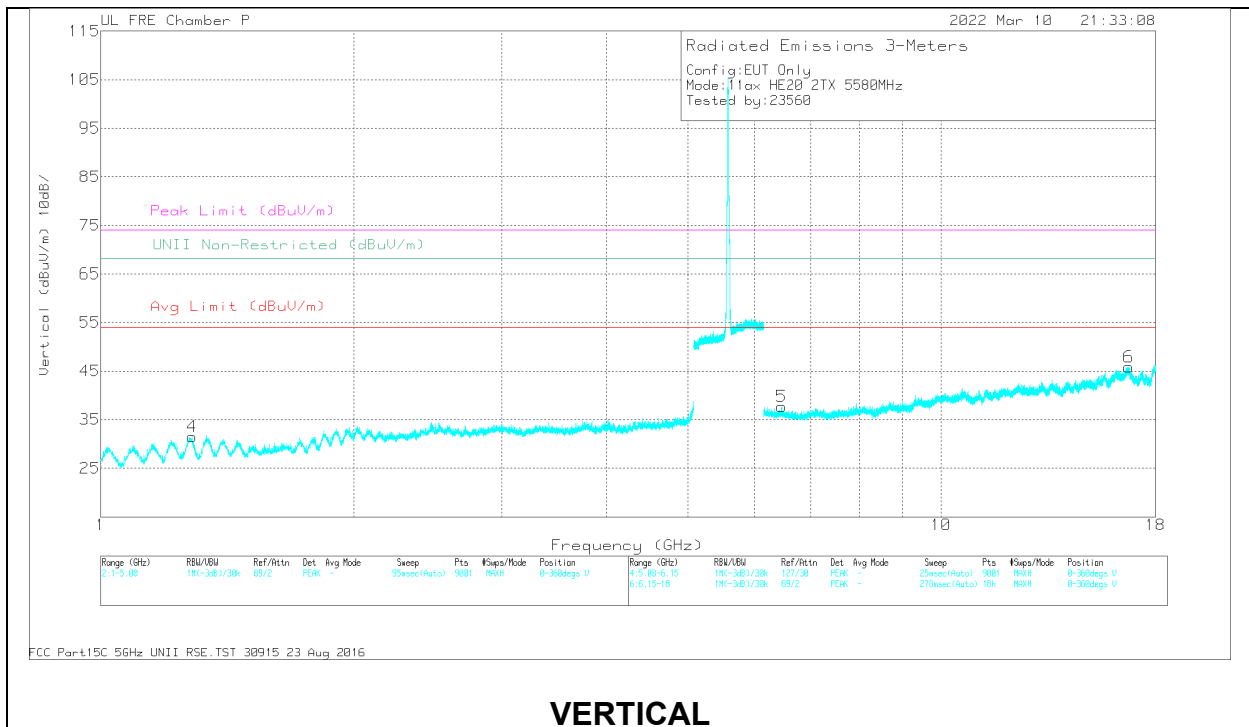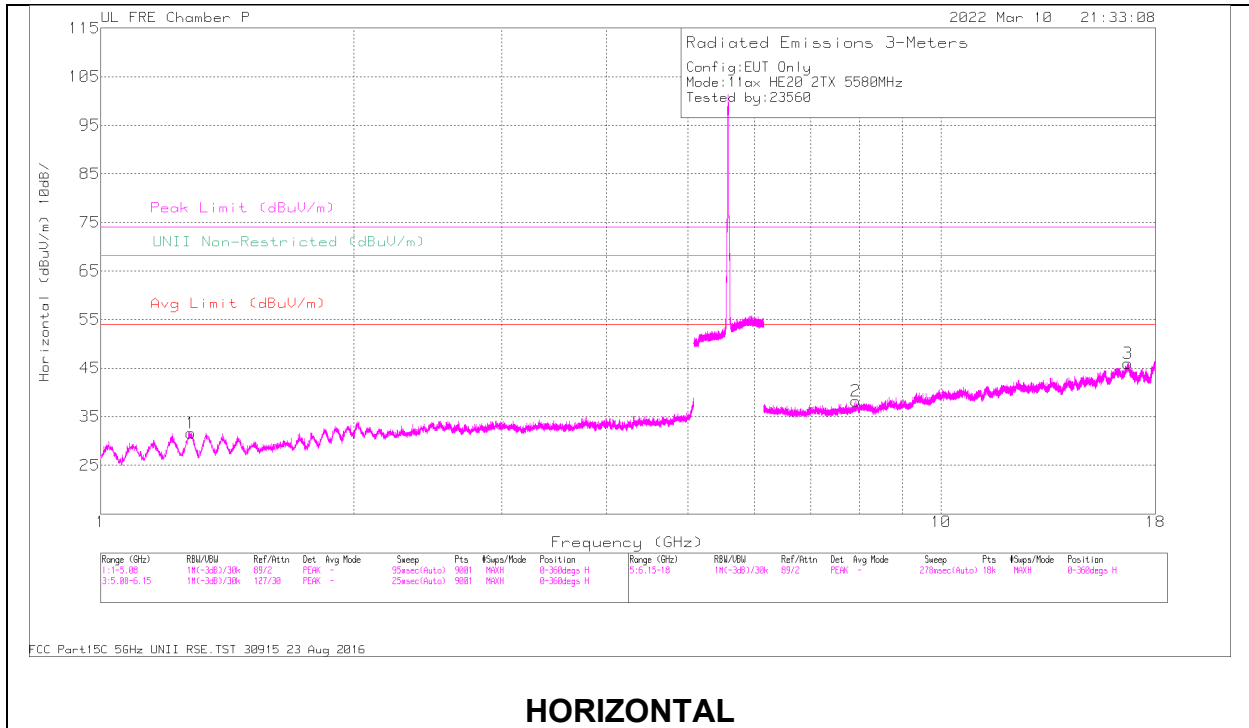


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 41112 (dBm)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*1.2783	56.87	PK-U	29.4	-44.4	41.87	-	-	74	-32.13	-	-	33	156	H
	*1.2813	45.24	ADR	29.4	-44.4	30.24	54	-23.76	-	-	-	-	33	156	H
4	*1.2825	56.27	PK-U	29.4	-44.4	41.27	-	-	74	-32.73	-	-	63	241	V
	*1.2829	44.87	ADR	29.4	-44.4	29.87	54	-24.13	-	-	-	-	63	241	V
	6.4602	48.73	PK-U	35.9	-37.7	46.93	-	-	-	-	68.2	-21.27	108	233	V
2	7.9252	46.82	PK-U	35.9	-35.4	47.32	-	-	-	-	68.2	-20.88	128	157	H
3	16.6736	44.69	PK-U	41	-29.1	56.59	-	-	-	-	68.2	-11.61	165	164	H
6	16.7338	44.19	PK-U	40.8	-29.5	55.49	-	-	-	-	68.2	-12.71	254	199	V

PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

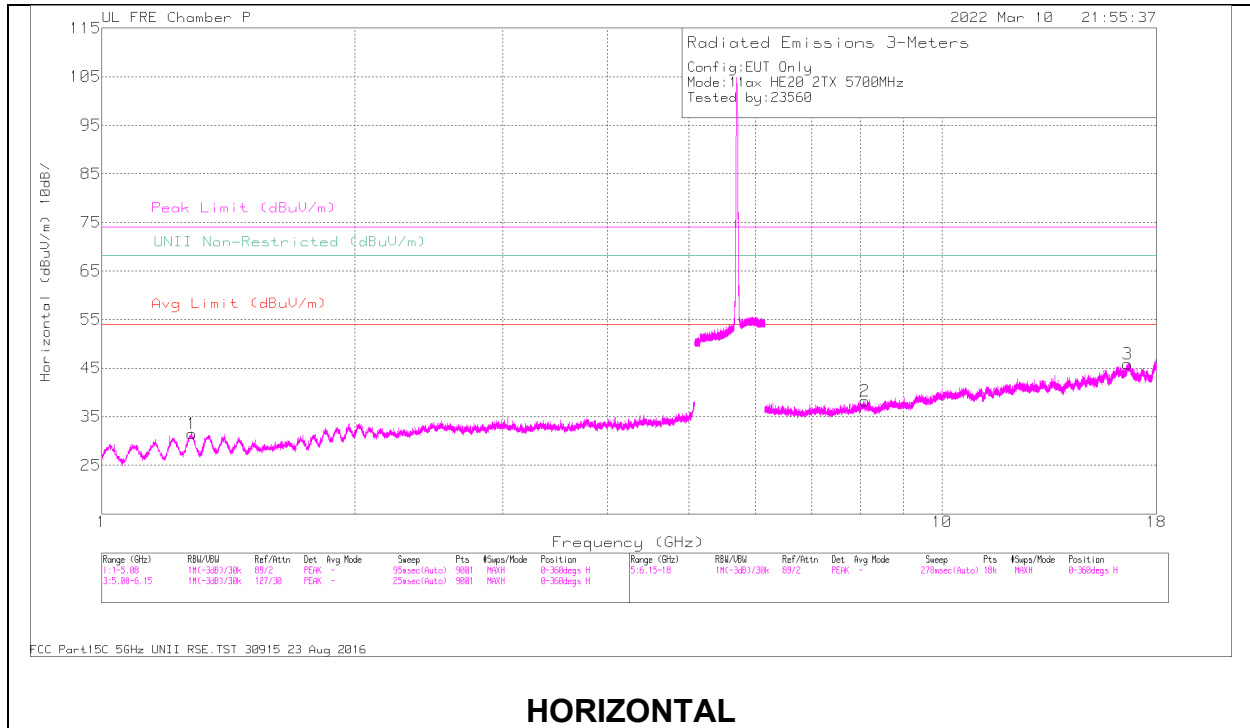

HORIZONTAL

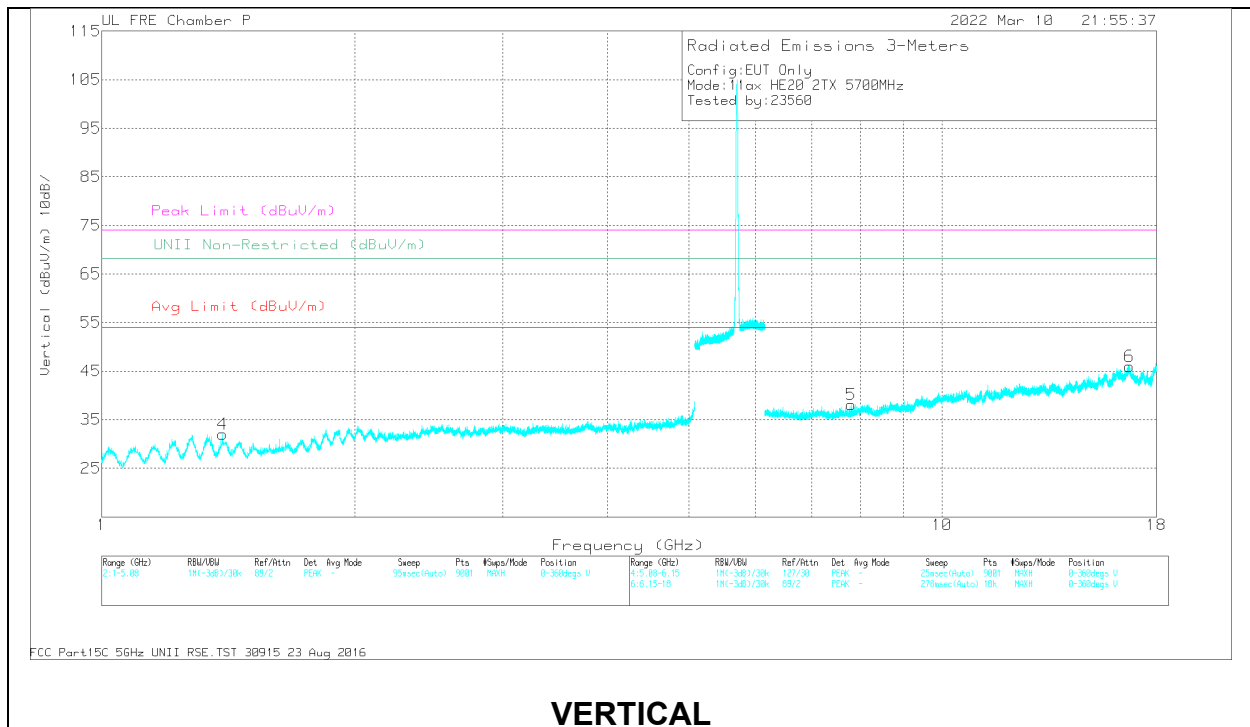


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 41112 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*1.278	45.13	ADR	29.4	-44.4	30.13	54	-23.87	-	-	-	-	50	179	H
	*1.2802	56.82	PK-U	29.4	-44.4	41.82	-	-	74	-32.18	-	-	50	179	H
4	*1.3925	44.3	ADR	29.1	-44.1	29.3	54	-24.7	-	-	-	-	110	152	V
	*1.3938	56.15	PK-U	29.1	-44.1	41.15	-	-	74	-32.85	-	-	110	152	V
5	7.8050	46.38	PK-U	35.9	-35.5	46.78	-	-	-	-	68.2	-21.42	97	201	V
2	*8.1024	35.69	ADR	35.9	-35.4	36.19	54	-17.81	-	-	-	-	157	162	H
	*8.1037	46.77	PK-U	35.9	-35.4	47.27	-	-	74	-26.73	-	-	157	162	H
3	16.6437	43.7	PK-U	40.9	-29.5	55.1	-	-	-	-	68.2	-13.1	97	135	H
6	16.7272	44.23	PK-U	40.9	-29.5	55.63	-	-	-	-	68.2	-12.57	226	250	V

PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

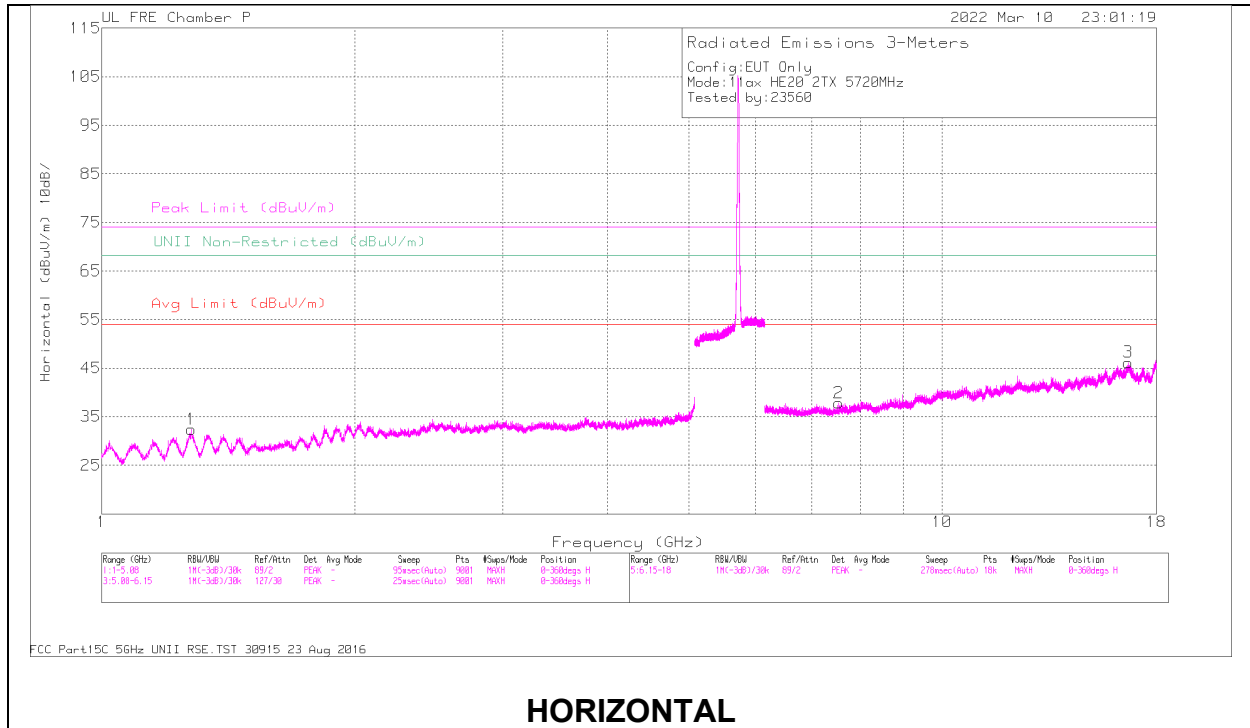

HORIZONTAL

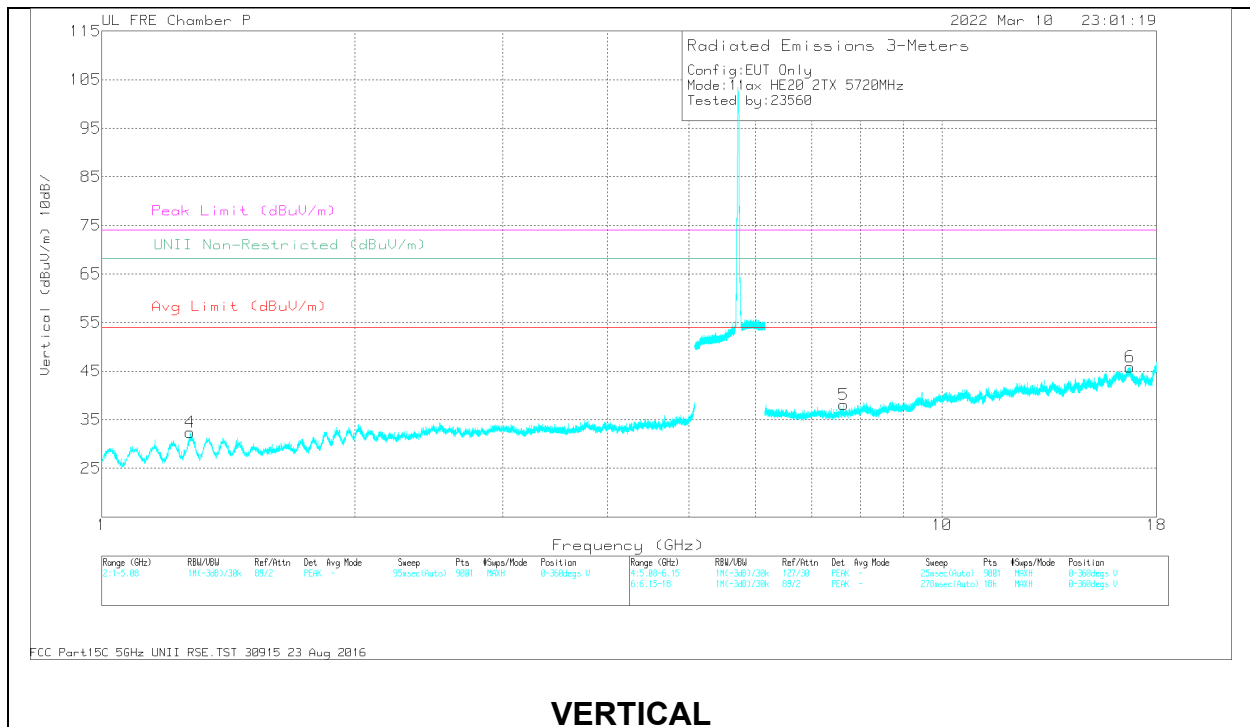

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Dist	AF 41112 (dBm)	Amp/Cbl/FI tri/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	*1.2735	56.72	PK-U	29.4	-44.4	41.72	-	-	74	-32.28	-	-	112	224	V
	*1.2738	45.17	ADR	29.4	-44.4	30.17	54	-23.83	-	-	-	-	112	224	V
1	*1.2773	45.41	ADR	29.4	-44.4	30.41	54	-23.59	-	-	-	-	63	208	H
	*1.2786	56.8	PK-U	29.4	-44.4	41.8	-	-	74	-32.2	-	-	63	208	H
2	*7.537	35.41	ADR	35.8	-36.1	35.11	54	-18.89	-	-	-	-	169	149	H
	*7.5392	47.27	PK-U	35.8	-36.2	46.87	-	-	74	-27.13	-	-	169	149	H
5	*7.6447	34.95	ADR	35.8	-35.6	35.15	54	-18.85	-	-	-	-	240	175	V
	*7.6457	46.56	PK-U	35.8	-35.6	46.76	-	-	74	-27.24	-	-	240	175	V
	16.6732	44.09	PK-U	41	-29.1	55.99	-	-	-	-	68.2	-12.21	127	214	H
6	16.7444	43.6	PK-U	40.8	-29.5	54.9	-	-	-	-	68.2	-13.3	191	253	V


PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.2.17. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.6 GHz BAND

1TX Antenna 6: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

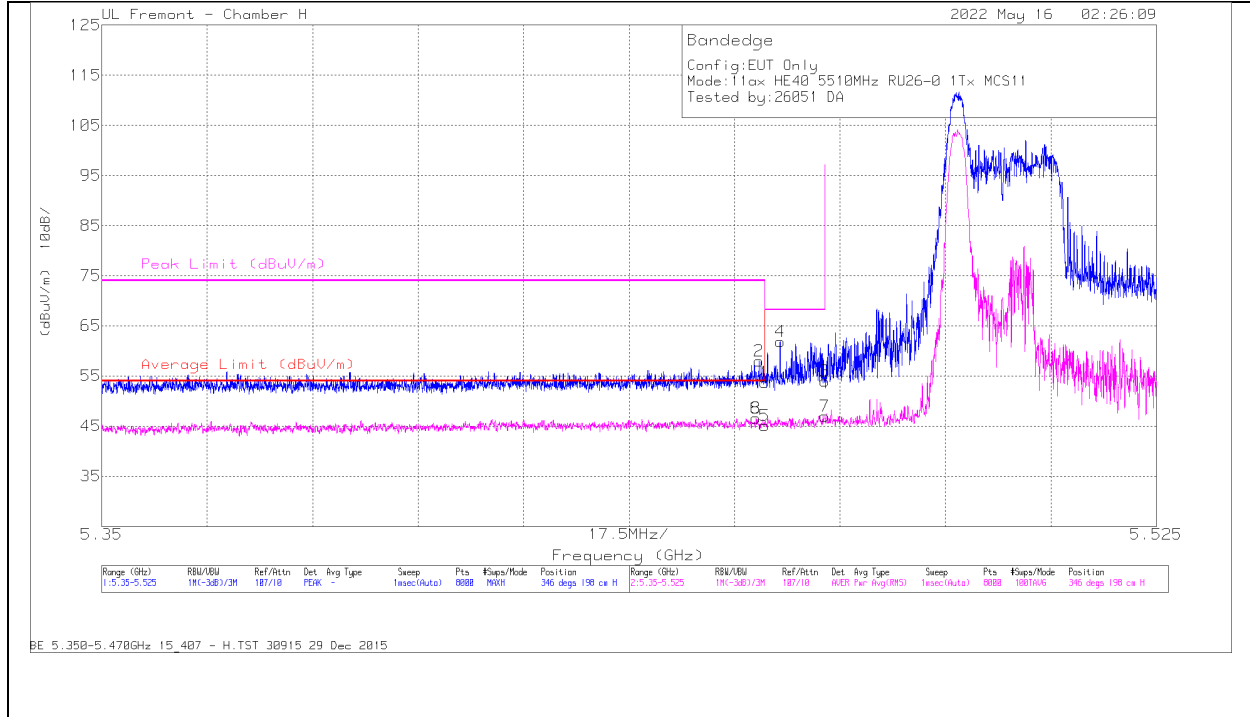


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dBm)	Ampl/Cbl/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.31	Pk	34.8	-23.4	0	53.71	-	-	74	-20.29	346	198	H
2	* 5.45904	46.52	Pk	34.8	-23.4	0	57.92	-	-	74	-16.08	346	198	H
5	* 5.46	33.72	RMS	34.8	-23.4	0.47	45.59	54	-8.41	-	-	346	198	H
6	* 5.458581	35.19	RMS	34.8	-23.4	0.47	47.06	54	-6.94	-	-	346	198	H
4	5.462562	50.4	Pk	34.9	-23.4	0	61.9	-	-	68.2	-6.3	346	198	H
3	5.47	42.33	Pk	34.9	-23.2	0	54.03	-	-	68.2	-14.17	346	198	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

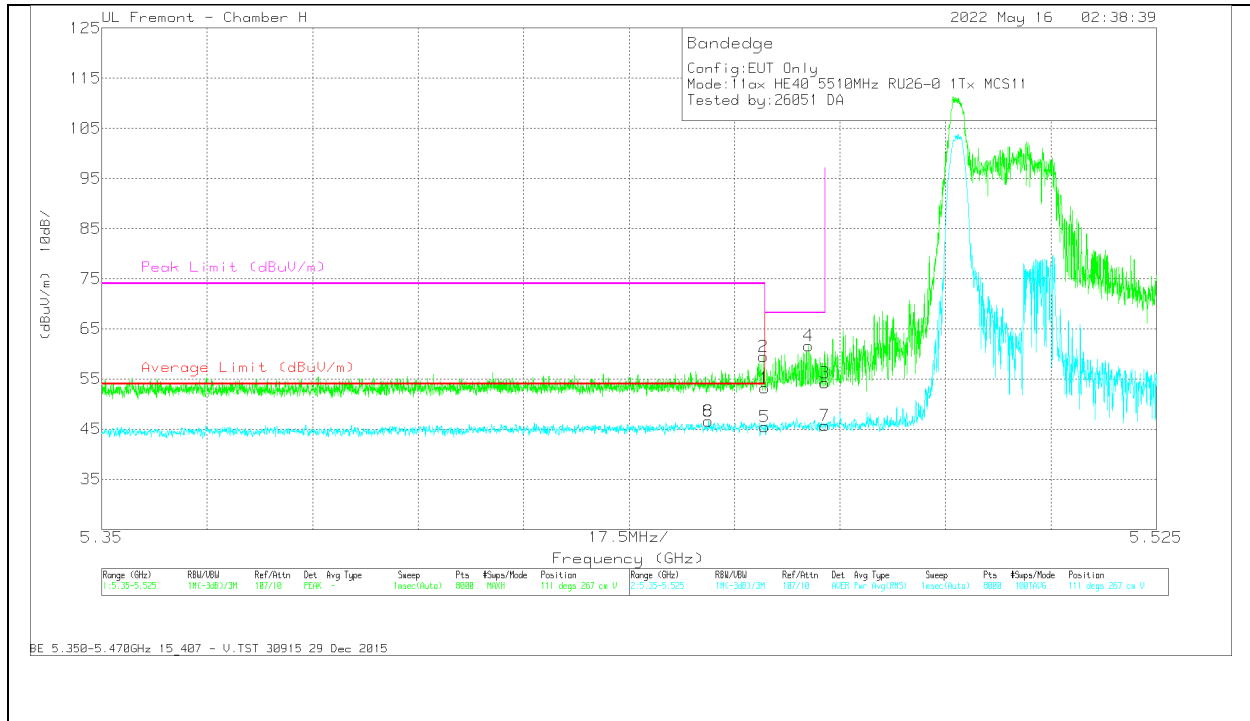

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dB/m)	Amp/CbI/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Dege)	Height (cm)	Polarity
1	* 5.46	41.82	Pk	34.8	-23.4	0	53.22	-	-	74	-20.78	111	267	V
2	* 5.459806	48.04	Pk	34.8	-23.4	0	59.44	-	-	74	-14.56	111	267	V
5	* 5.46	34.07	RMS	34.8	-23.4	0.47	45.94	54	-8.06	-	-	111	267	V
6	* 5.450683	35.04	RMS	34.9	-23.4	0.47	47.01	54	-6.99	-	-	111	267	V
4	5.46731	50.04	Pk	34.9	-23.3	0	61.64	-	-	68.2	-6.56	111	267	V
3	5.47	42.56	Pk	34.9	-23.2	0	54.26	-	-	68.2	-13.94	111	267	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

1TX Antenna 6: 26-Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

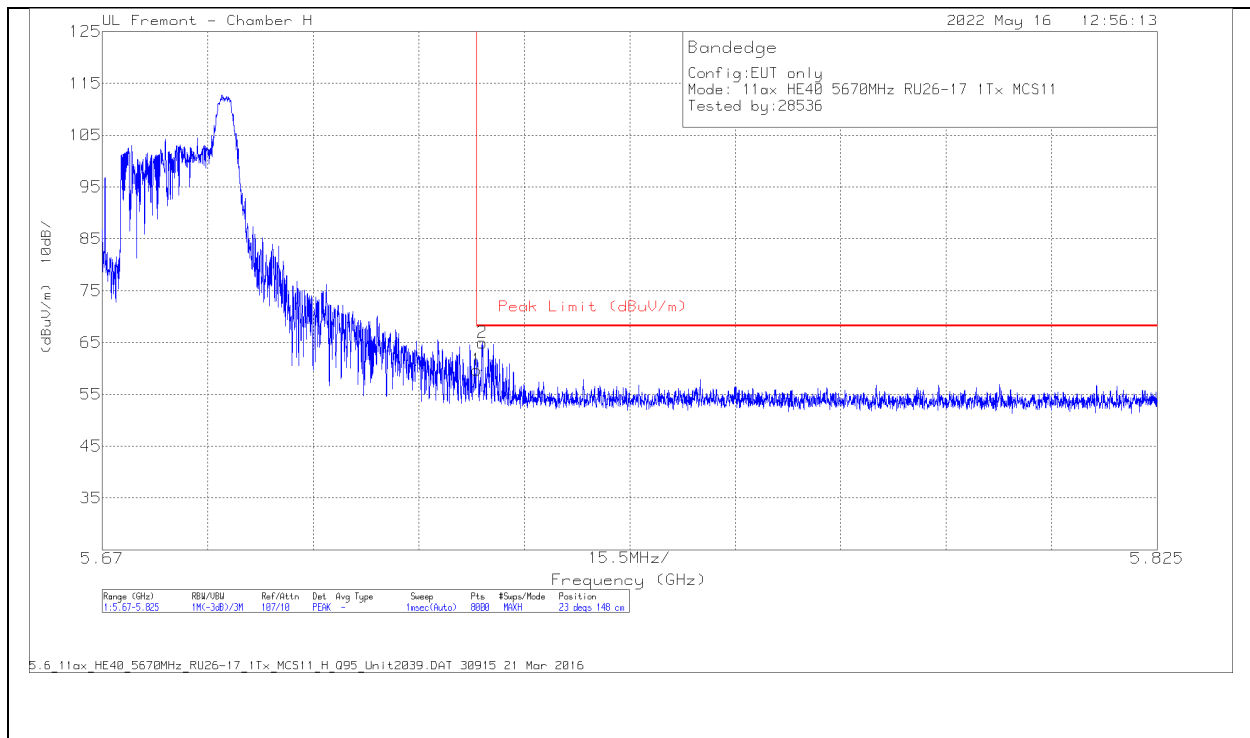

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dB/m)	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	47.41	Pk	34.9	-22.6	59.71	68.2	-8.49	23	148	H
2	5.725864	52.58	Pk	35	-22.6	64.98	68.2	-3.22	23	148	H

Pk - Peak detector

VERTICAL RESULT

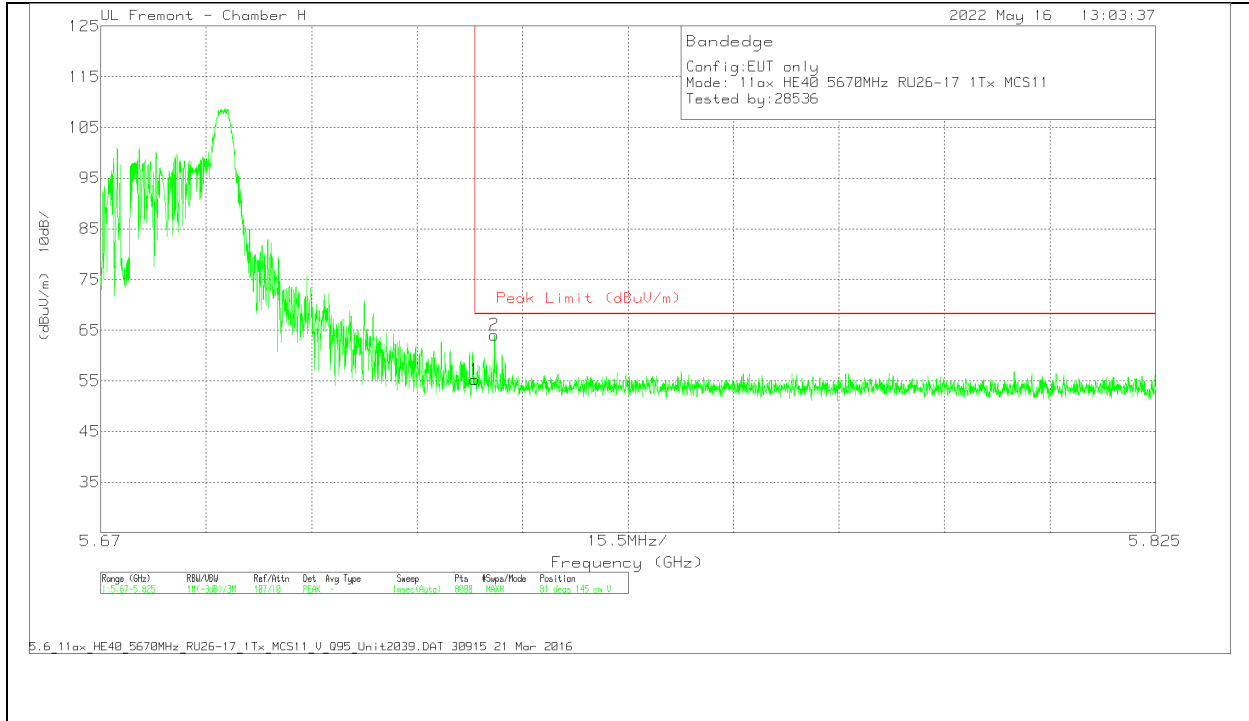


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dB/m)	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.9	Pk	34.9	-22.6	55.2	68.2	-13	81	145	V
2	5.72786	51.69	Pk	35	-22.6	64.09	68.2	-4.11	81	145	V

Pk - Peak detector

1TX Antenna 6: SU, Single User

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

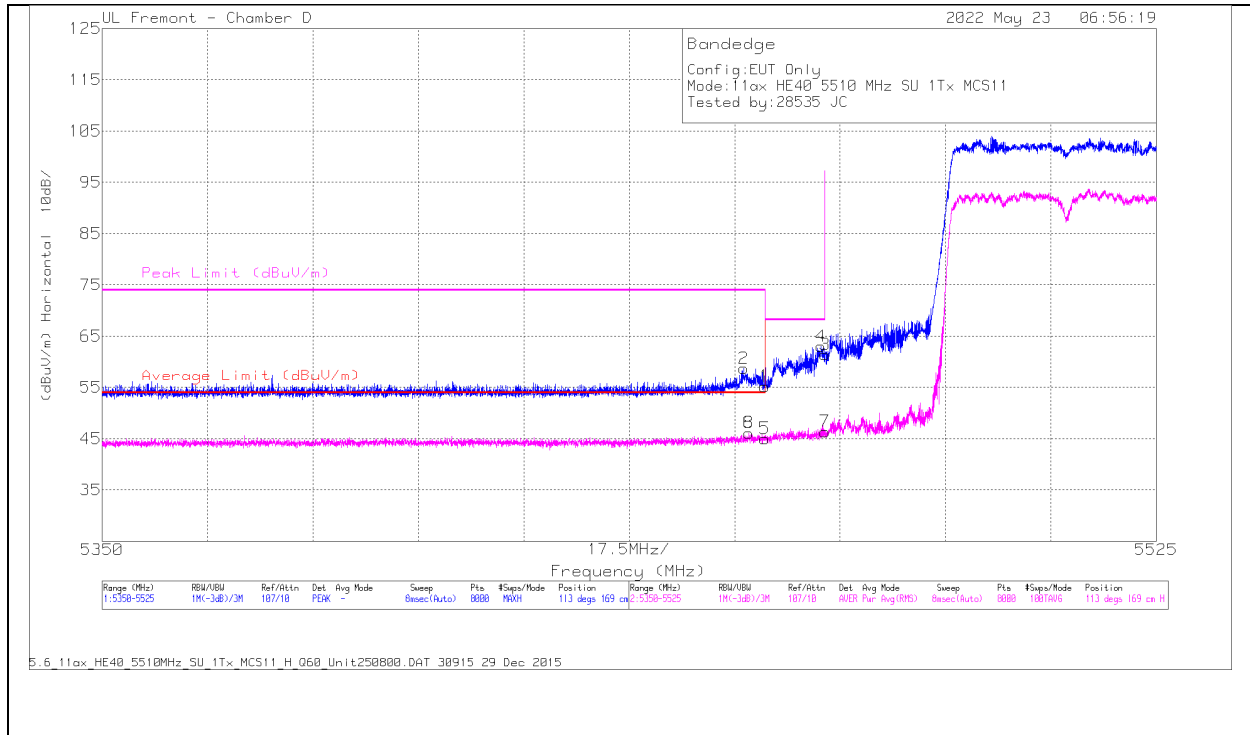


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200786 ACF (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	38.6	Pk	34.6	-18	0	55.2	-	-	74	-18.80	113	169	H
2	* 5456.48	42.22	PK	34.6	-18.1	0	58.72	-	-	74	-15.28	113	169	H
5	* 5460	27.61	RMS	34.6	-18	.8	45.01	54	-8.99	-	-	113	169	H
6	* 5457.377	28.83	RMS	34.6	-18.1	.8	46.13	54	-7.87	-	-	113	169	H
4	5469.344	46.58	Pk	34.6	-18.2	0	62.98	-	-	68.2	-5.22	113	169	H
3	5470	44.98	Pk	34.6	-18.2	0	61.38	-	-	68.2	-6.82	113	169	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

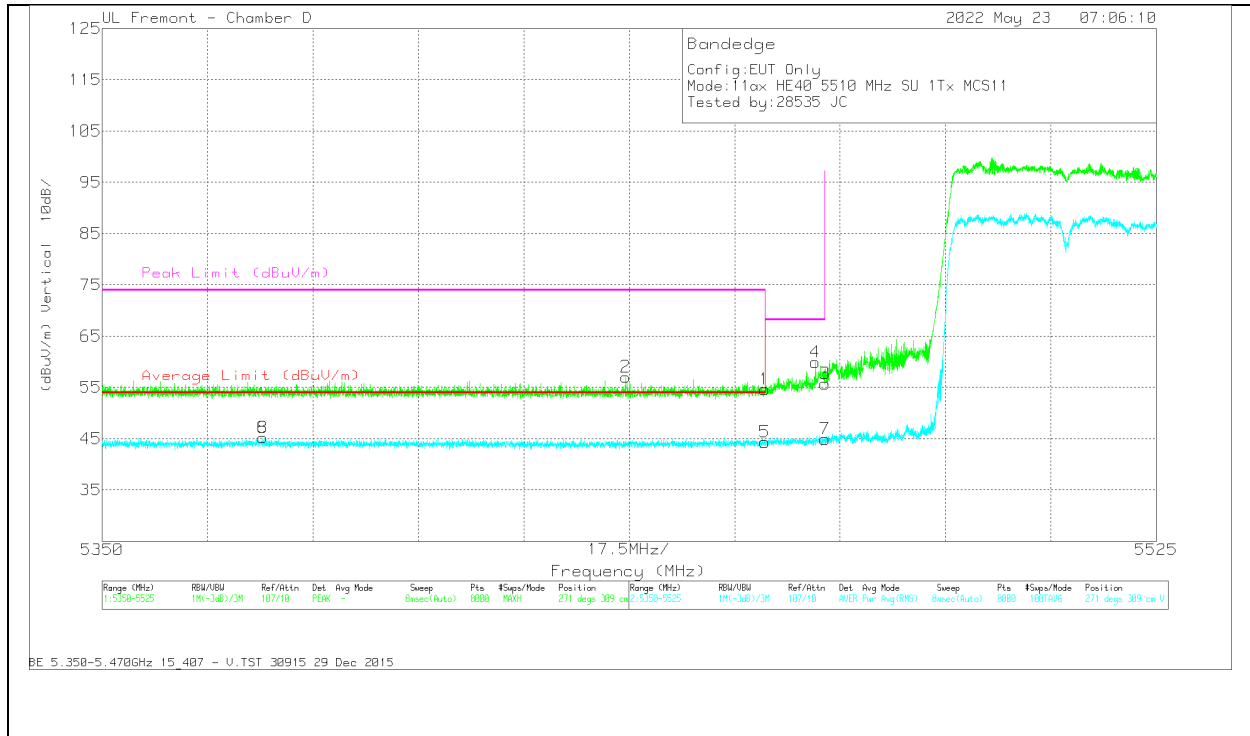


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200786 ACF (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	38.02	Pk	34.6	-18	0	54.62	-	-	74	-19.38	271	309	V
2	* 5436.899	40.73	Pk	34.6	-18.3	0	57.03	-	-	74	-16.97	271	309	V
5	* 5460	26.92	RMS	34.6	-18	.8	44.32	54	-9.68	-	-	271	309	V
6	* 5376.669	28	RMS	34.7	-18.3	.8	45.2	54	-8.8	-	-	271	309	V
4	5468.382	43.5	Pk	34.6	-18.2	0	59.9	-	-	68.2	-8.3	271	309	V
3	5470	39.32	Pk	34.6	-18.2	0	55.72	-	-	68.2	-12.48	271	309	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

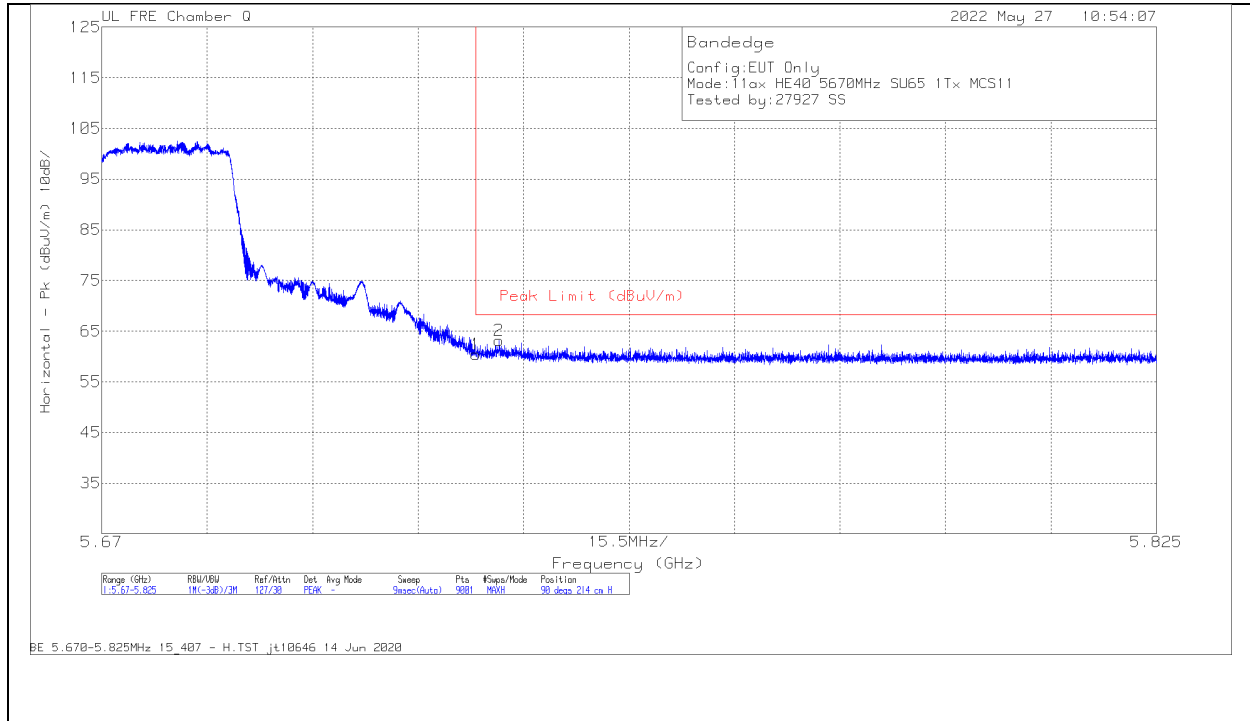

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 200895 (dB/m)	Amp/Cb/Fitr/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	55.59	PK	34.7	-29.9	0	60.39	68.2	-7.81	90	214	H
2	5.728383	58.26	PK	34.7	-29.8	0	63.16	68.2	-5.04	90	214	H

Pk - Peak detector

VERTICAL RESULT

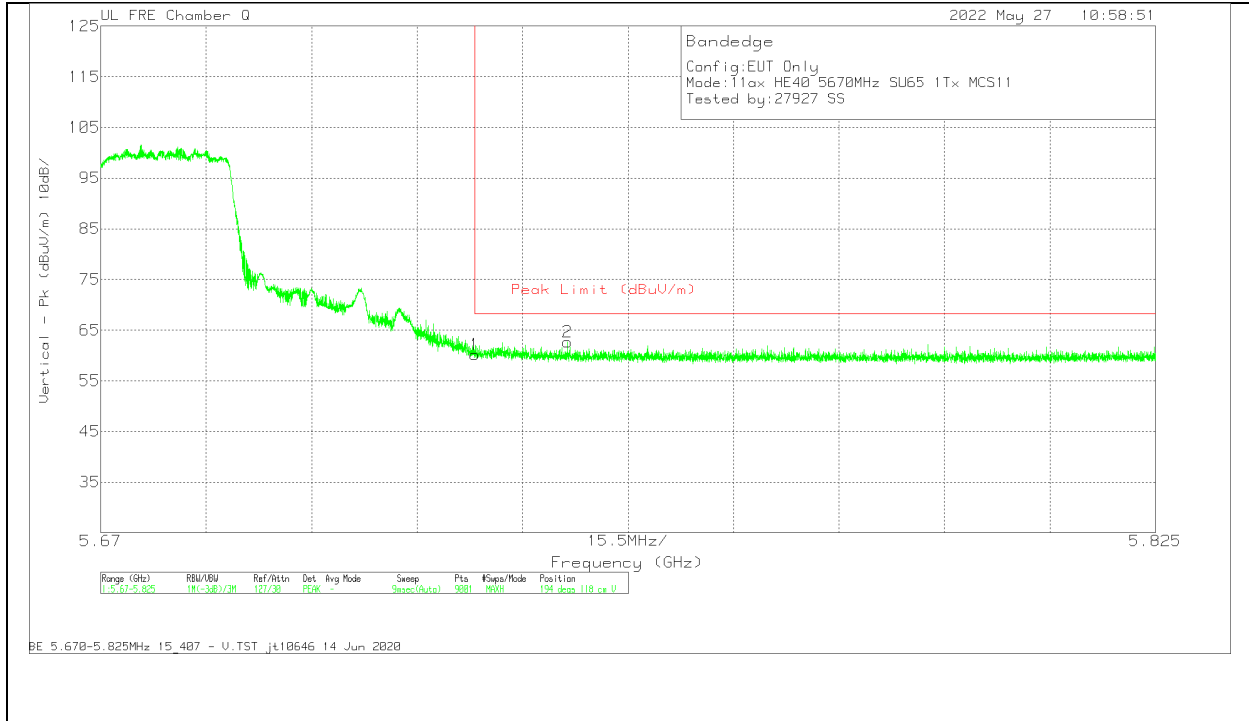


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 200895 (dB/m)	Amp/Cb1/Fitr/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	55.38	PK	34.7	-29.9	0	60.18	68.2	-8.02	194	118	V
2	5.738578	57.72	PK	34.7	-29.8	0	62.62	68.2	-5.58	194	118	V

Pk - Peak detector

1TX Antenna 5: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

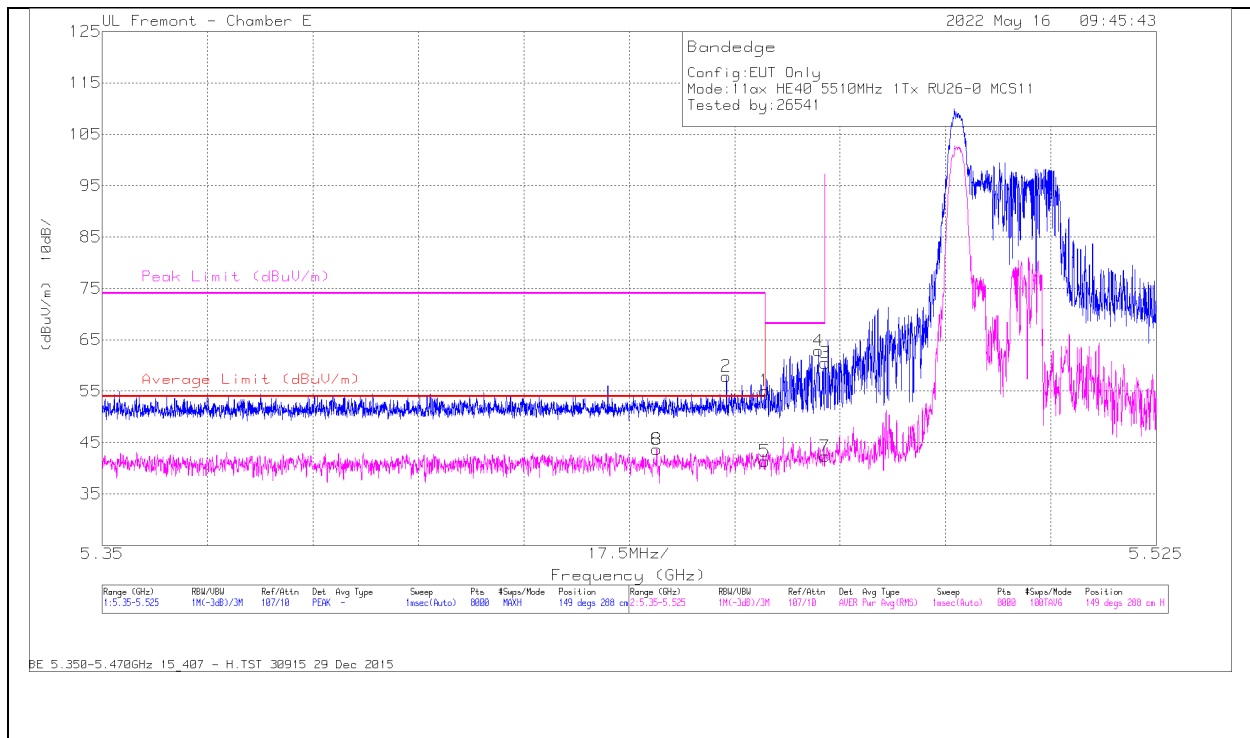


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.37	Pk	34.4	-20.7	0	55.07	-	-	74	-18.93	149	288	H
2	* 5.453614	44.21	Pk	34.4	-20.7	0	57.91	-	-	74	-16.09	149	288	H
5	* 5.46	27.71	RMS	34.4	-20.7	0.47	41.88	54	-12.12	-	-	149	288	H
6	* 5.442063	29.99	RMS	34.4	-20.7	0.47	44.16	54	-9.84	-	-	149	288	H
4	5.468907	49.17	Pk	34.4	-20.7	0	62.87	-	-	68.2	-5.33	149	288	H
3	5.47	46.81	Pk	34.4	-20.7	0	60.51	-	-	68.2	-7.69	149	288	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

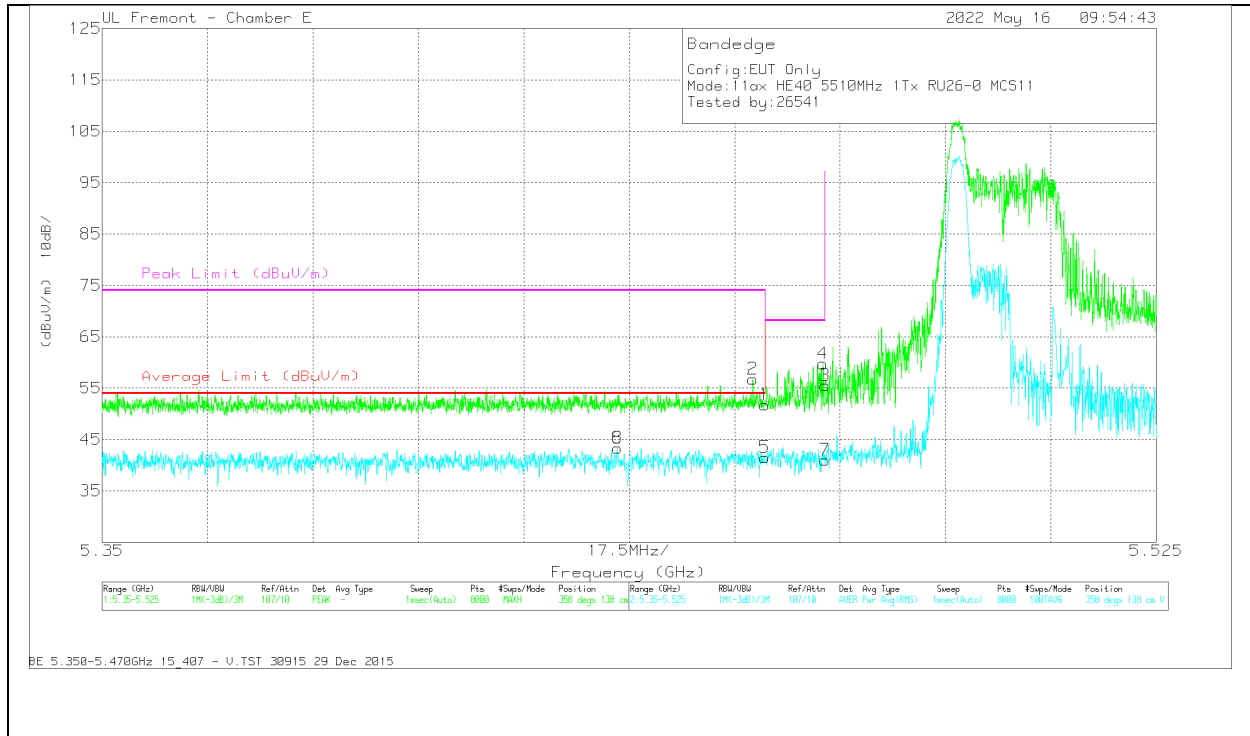

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.08	Pk	34.4	-20.7	0	51.78	-	-	74	-22.22	358	138	V
2	* 5.458012	43.1	Pk	34.4	-20.7	0	56.8	-	-	74	-17.2	358	138	V
5	* 5.46	27.82	RMS	34.4	-20.7	0.47	41.99	54	-12.01	-	-	358	138	V
6	* 5.435543	29.66	RMS	34.4	-20.7	0.47	43.83	54	-10.17	-	-	358	138	V
4	5.469673	46.07	Pk	34.4	-20.7	0	59.77	-	-	68.2	-8.43	358	138	V
3	5.47	41.85	Pk	34.4	-20.7	0	55.55	-	-	68.2	-12.65	358	138	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

1TX Antenna 5: 26-Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

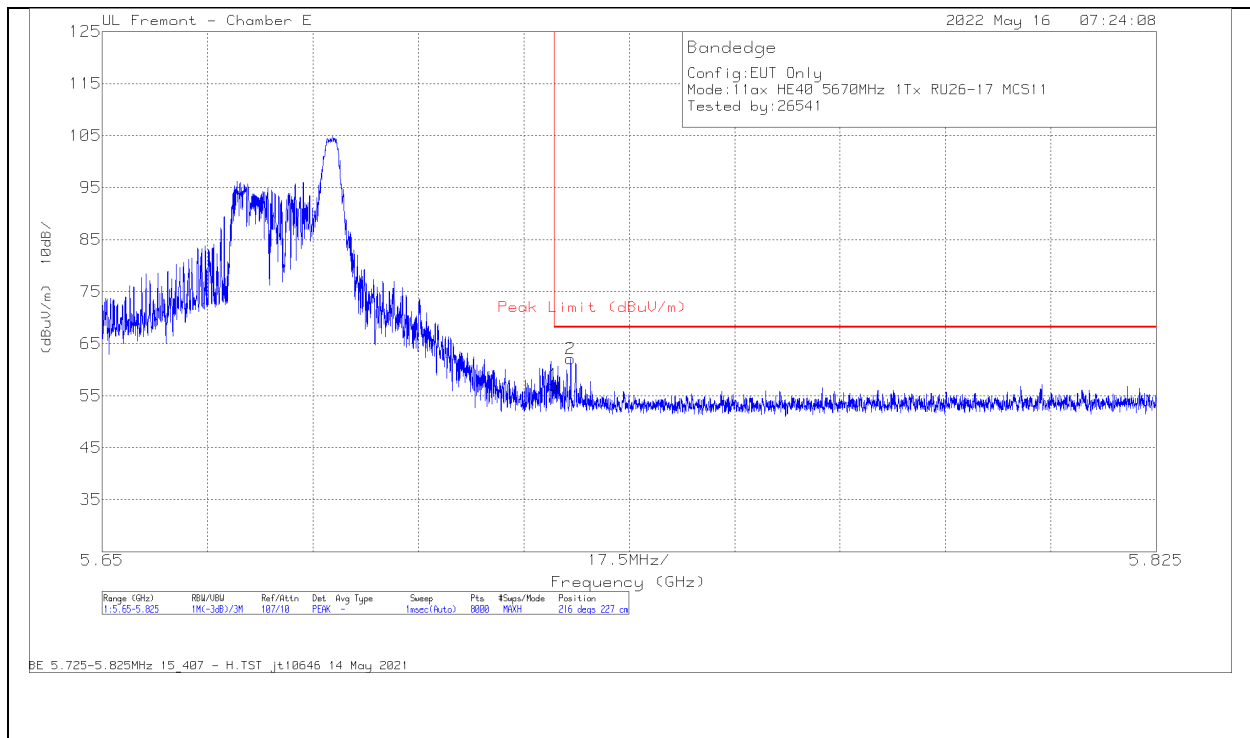

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/Par d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.64	Pk	34.7	-20.3	0	57.04	68.2	-11.16	216	227	H
2	5.727754	47.67	Pk	34.7	-20.3	0	62.07	68.2	-6.13	216	227	H

Pk - Peak detector

VERTICAL RESULT

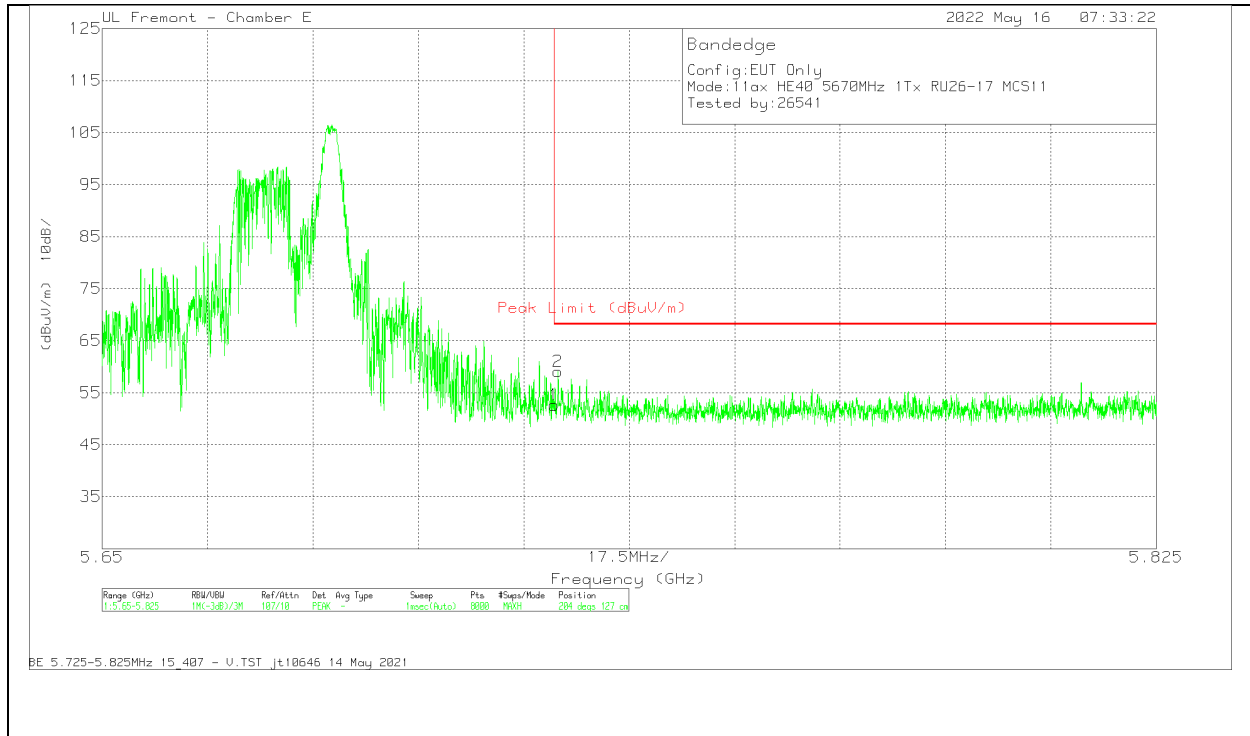


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Ch/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.23	Pk	34.7	-20.3	52.63	68.2	-15.57	204	127	V
2	5.725654	44.67	Pk	34.7	-20.3	59.07	68.2	-9.13	204	127	V

Pk - Peak detector

1TX Antenna 5: SU, Single User

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

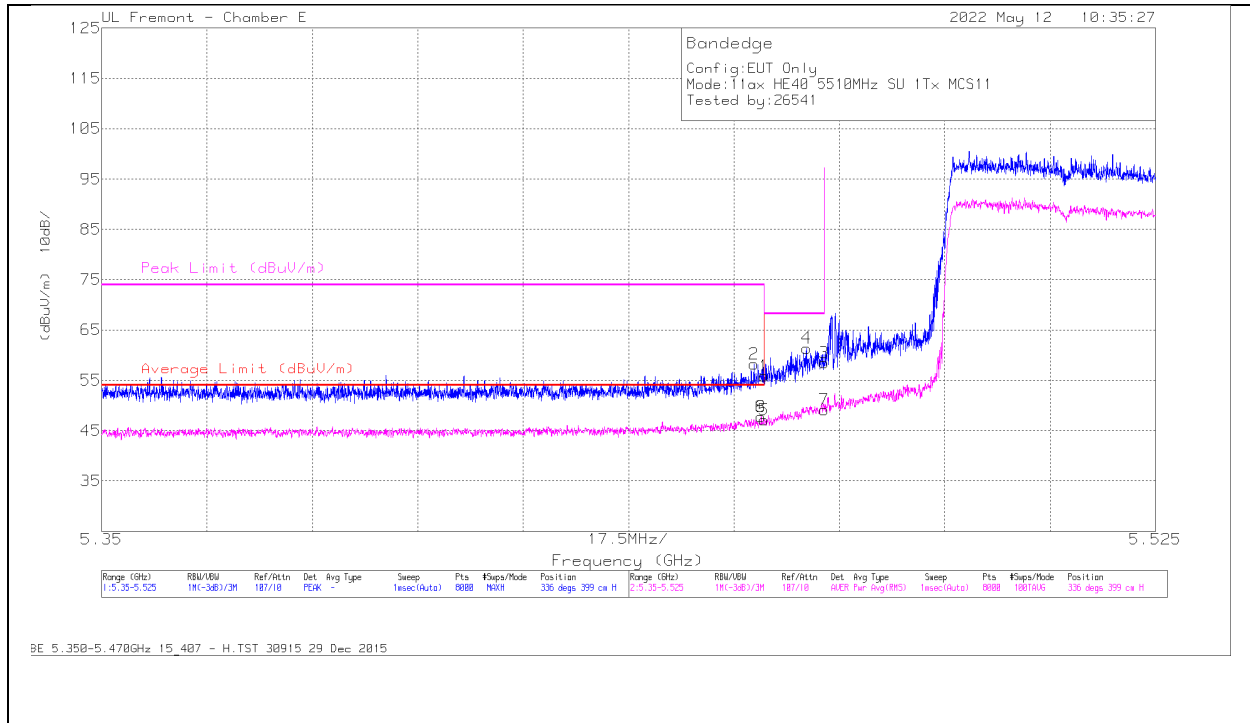


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20097 ACF (dB/m)	Amp/Cb/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.17	Pk	34.4	-20.7	0	55.87	-	-	74	-18.13	336	399	H
2	* 5.458318	44.54	Pk	34.4	-20.7	0	58.24	-	-	74	-15.76	336	399	H
5	* 5.46	33.31	RMS	34.4	-20.7	.80	47.81	54	-6.19	-	-	336	399	H
6	* 5.459521	33.96	RMS	34.4	-20.7	.80	48.46	54	-5.54	-	-	336	399	H
4	5.467047	47.71	Pk	34.4	-20.7	0	61.41	-	-	68.2	-6.79	336	399	H
3	5.47	44.76	Pk	34.4	-20.7	0	58.46	-	-	68.2	-9.74	336	399	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

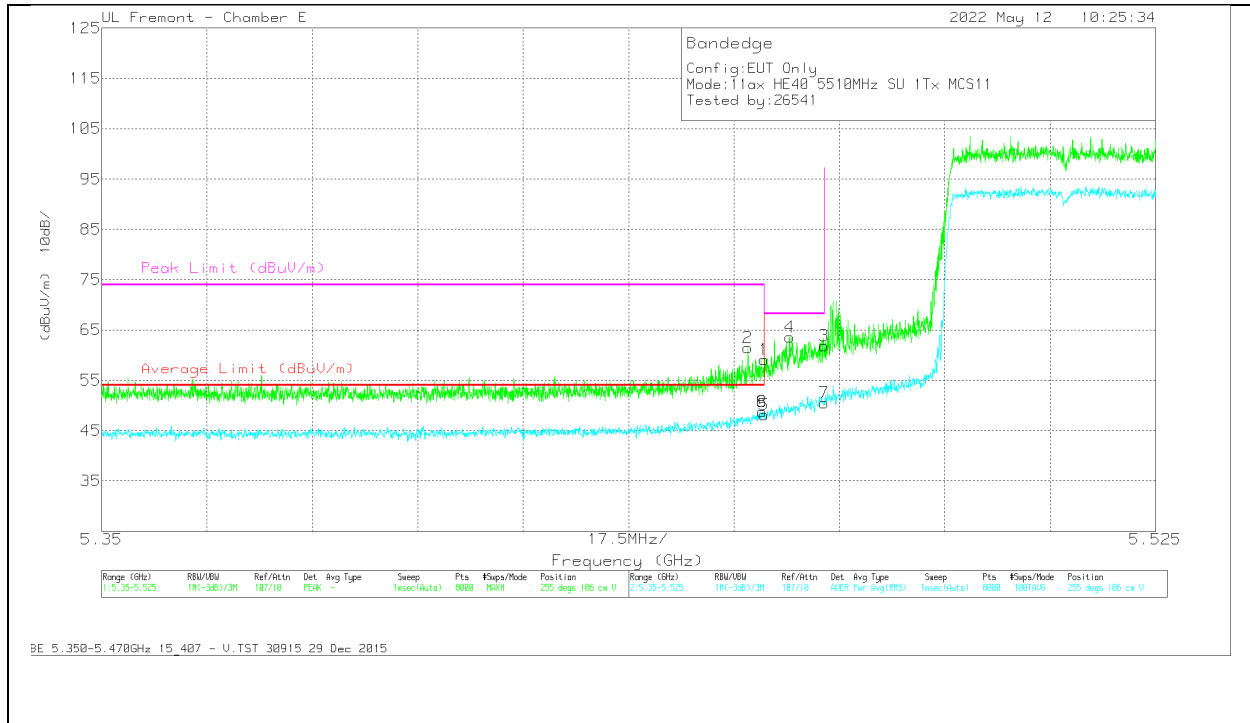


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	45.46	Pk	34.4	-20.7	0	59.16	-	-	74	-14.84	255	106	V
2	* 5.457312	47.73	Pk	34.4	-20.7	0	61.43	-	-	74	-12.57	255	106	V
5	* 5.46	34.36	RMS	34.4	-20.7	.80	48.86	54	-5.14	-	-	255	106	V
6	* 5.459674	34.95	RMS	34.4	-20.7	.80	49.45	54	-4.55	-	-	255	106	V
4	5.464225	49.94	Pk	34.4	-20.7	0	63.64	-	-	68.2	-4.56	255	106	V
3	5.47	48.1	Pk	34.4	-20.7	0	61.8	-	-	68.2	-6.4	255	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

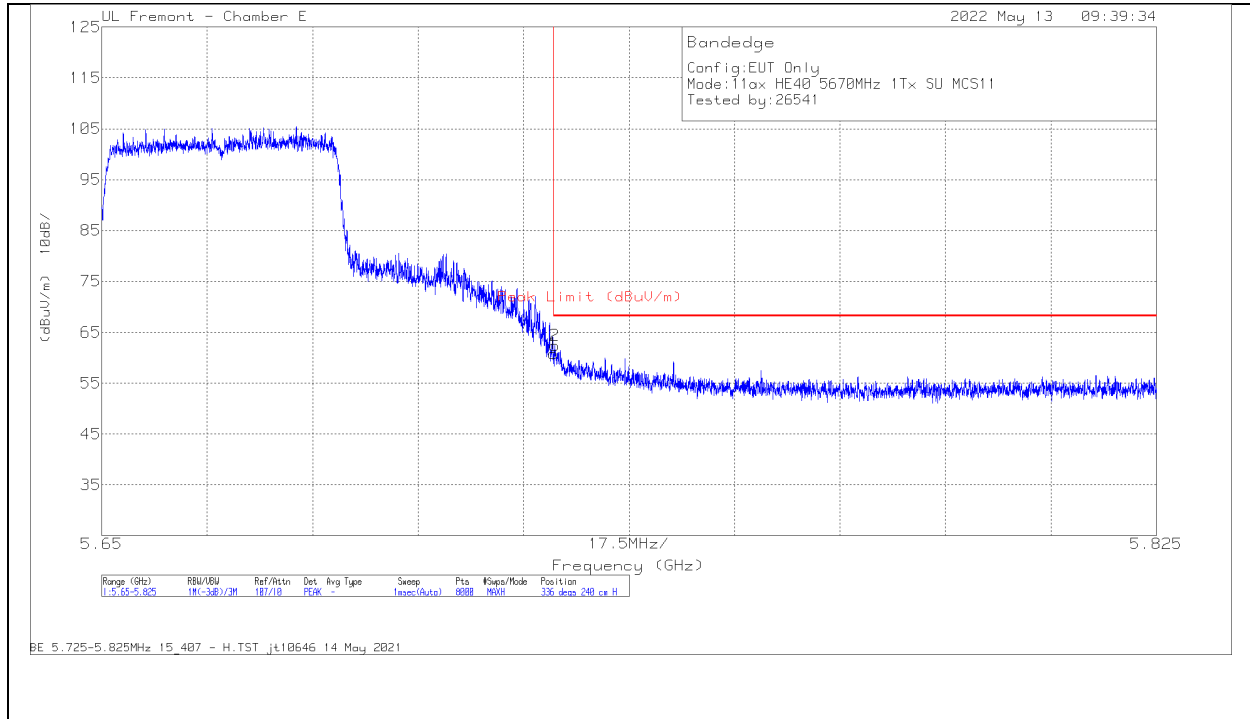

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.35	Pk	34.7	-20.3	0	60.75	68.2	-7.45	336	240	H
2	5.725151	48.06	Pk	34.7	-20.3	0	62.46	68.2	-5.74	336	240	H

Pk - Peak detector

VERTICAL RESULT

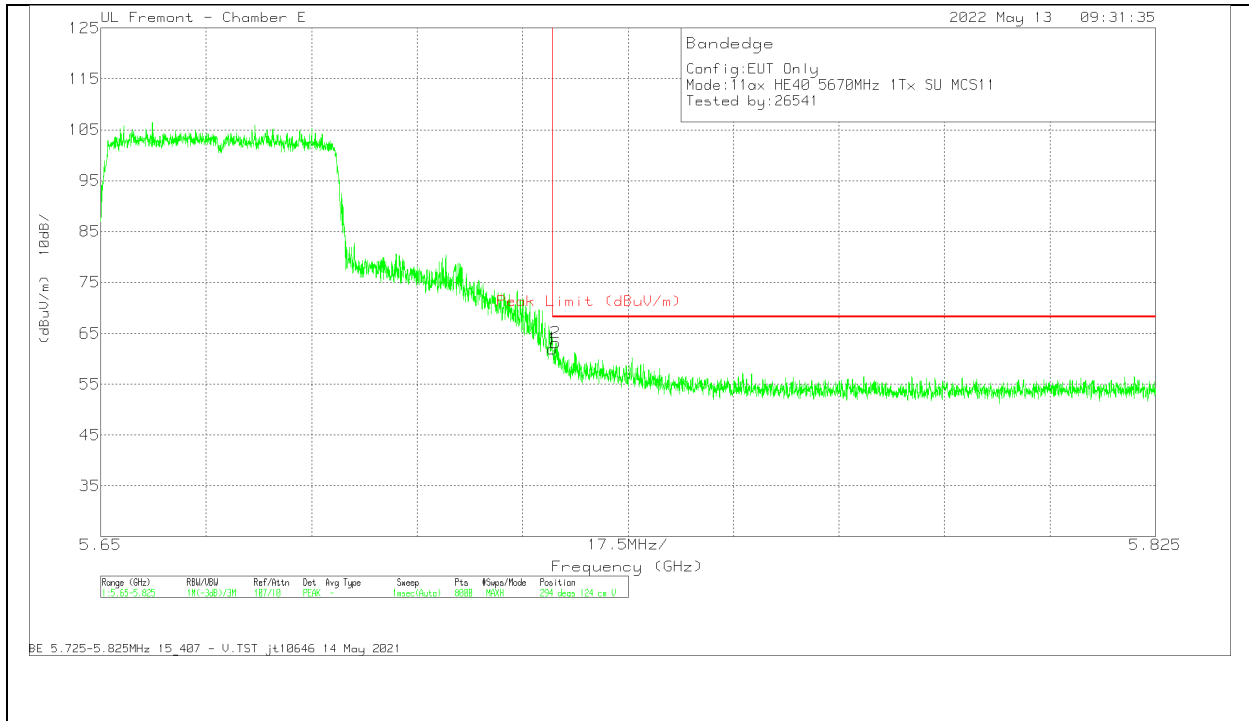


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	47.57	PK	34.7	-20.3	0	61.97	68.2	-6.23	294	124	V
2	5.725523	48.76	PK	34.7	-20.3	0	63.16	68.2	-5.04	294	124	V

Pk - Peak detector

2TX Antenna 6 + Antenna 3: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

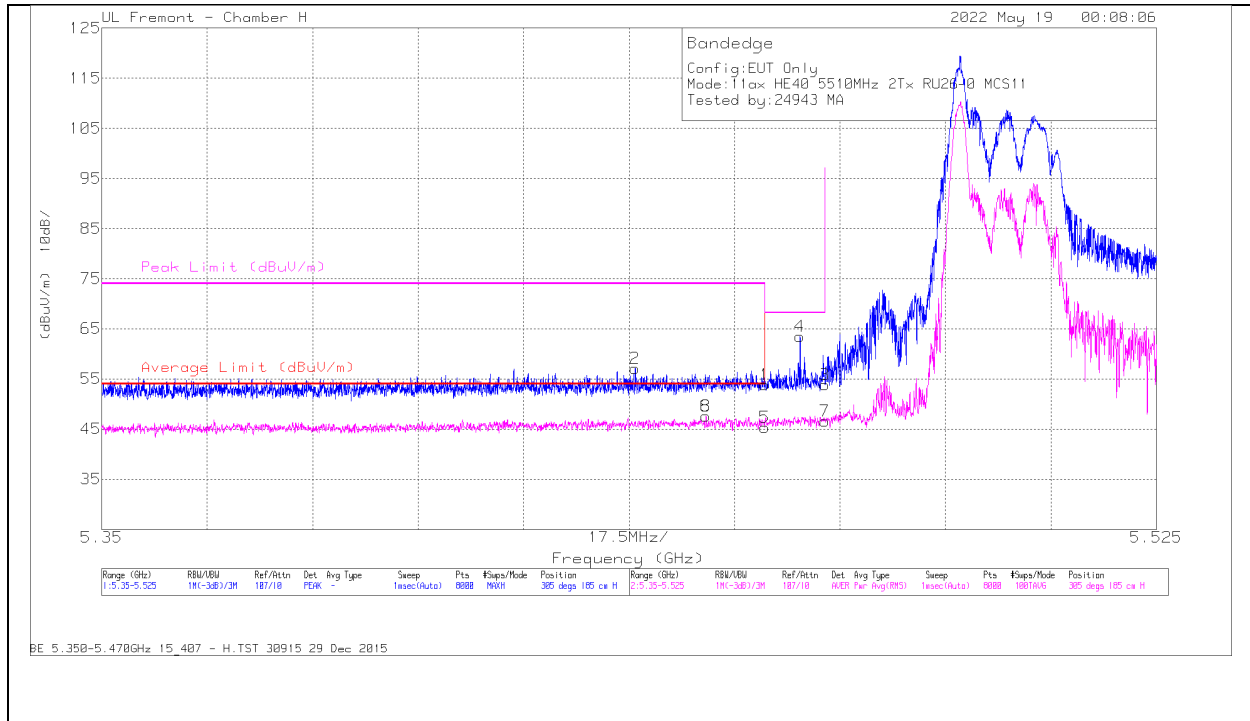


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dB/m)	Amp/Cb/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.438518	45.68	Pk	34.8	-23.4	0	57.08	-	-	74	-16.92	305	185	H
6	* 5.450267	35.59	RMS	34.9	-23.4	.47	47.56	54	-6.44	-	-	305	185	H
1	* 5.46	42.44	Pk	34.8	-23.4	0	53.84	-	-	74	-20.16	305	185	H
5	* 5.46	33.53	RMS	34.8	-23.4	.47	45.40	54	-8.60	-	-	305	185	H
4	5.465866	51.85	Pk	34.9	-23.3	0	63.45	-	-	68.2	-4.75	305	185	H
3	5.47	42.19	Pk	34.9	-23.2	0	53.89	-	-	68.2	-14.31	305	185	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

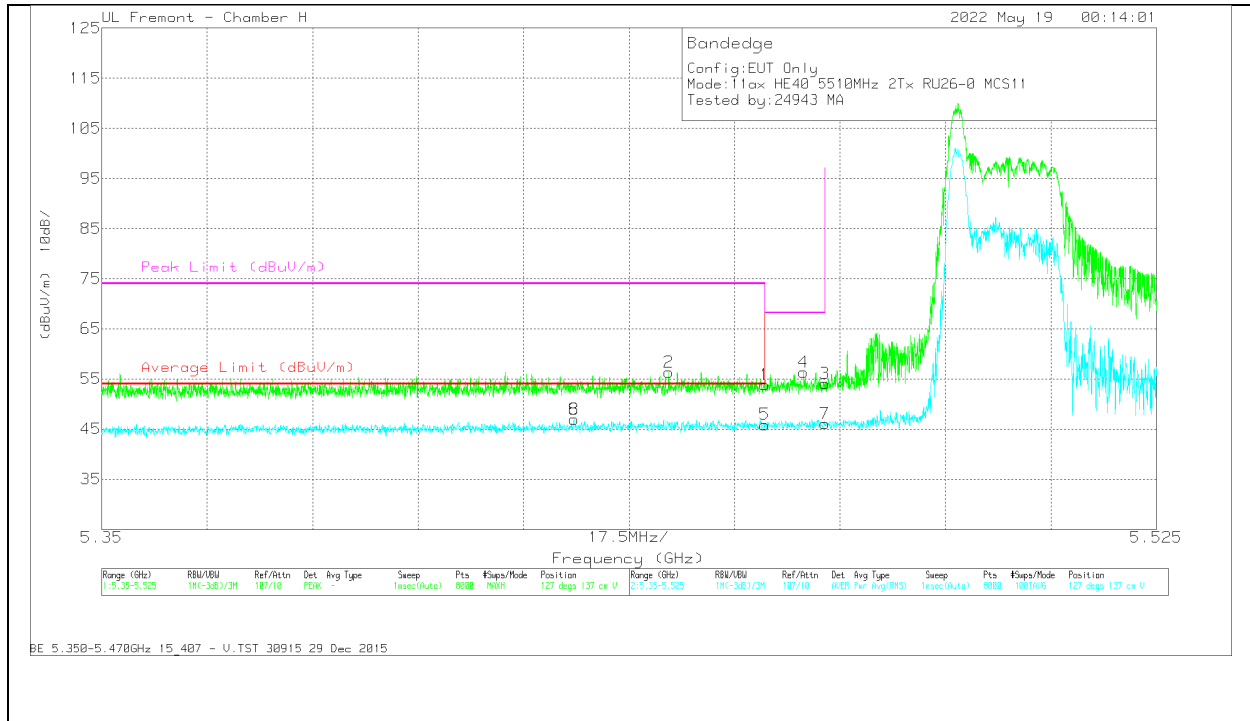

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dB/m)	Amp/Cbl/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.49	Pk	34.8	-23.4	0	53.89	-	-	74	-20.11	127	137	V
2	* 5.444075	45.1	Pk	34.8	-23.5	0	56.4	-	-	74	-17.6	127	137	V
5	* 5.46	34.05	RMS	34.8	-23.4	.47	45.92	54	-8.08	-	-	127	137	V
6	* 5.428367	35.06	RMS	34.9	-23.5	.47	46.93	54	-7.07	-	-	127	137	V
4	5.466478	44.71	Pk	34.9	-23.3	0	56.31	-	-	68.2	-11.89	127	137	V
3	5.47	42.39	Pk	34.9	-23.2	0	54.09	-	-	68.2	-14.11	127	137	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

2TX Antenna 6 + Antenna 5: 26-Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

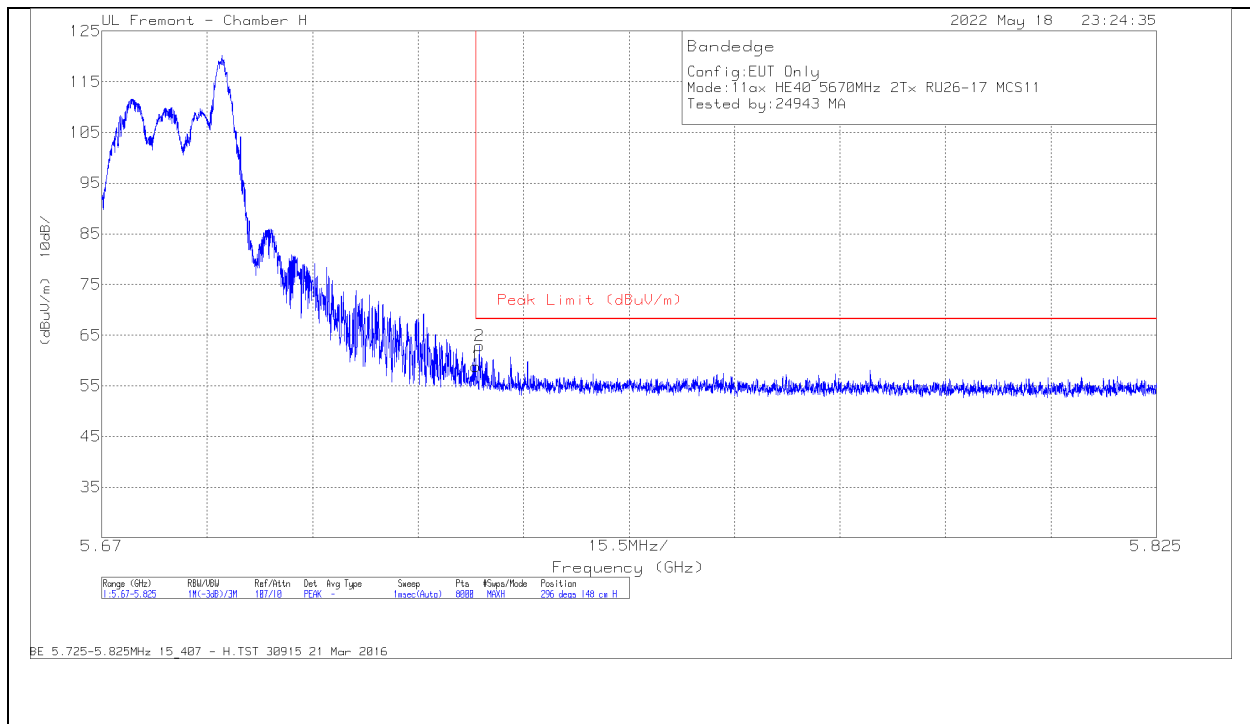

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dB/m)	Amp/Cbl/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.55	Pk	34.9	-22.6	0	58.85	68.2	-9.35	296	148	H
2	5.725515	50.55	Pk	35	-22.6	0	62.95	68.2	-5.25	296	148	H

Pk - Peak detector

VERTICAL RESULT

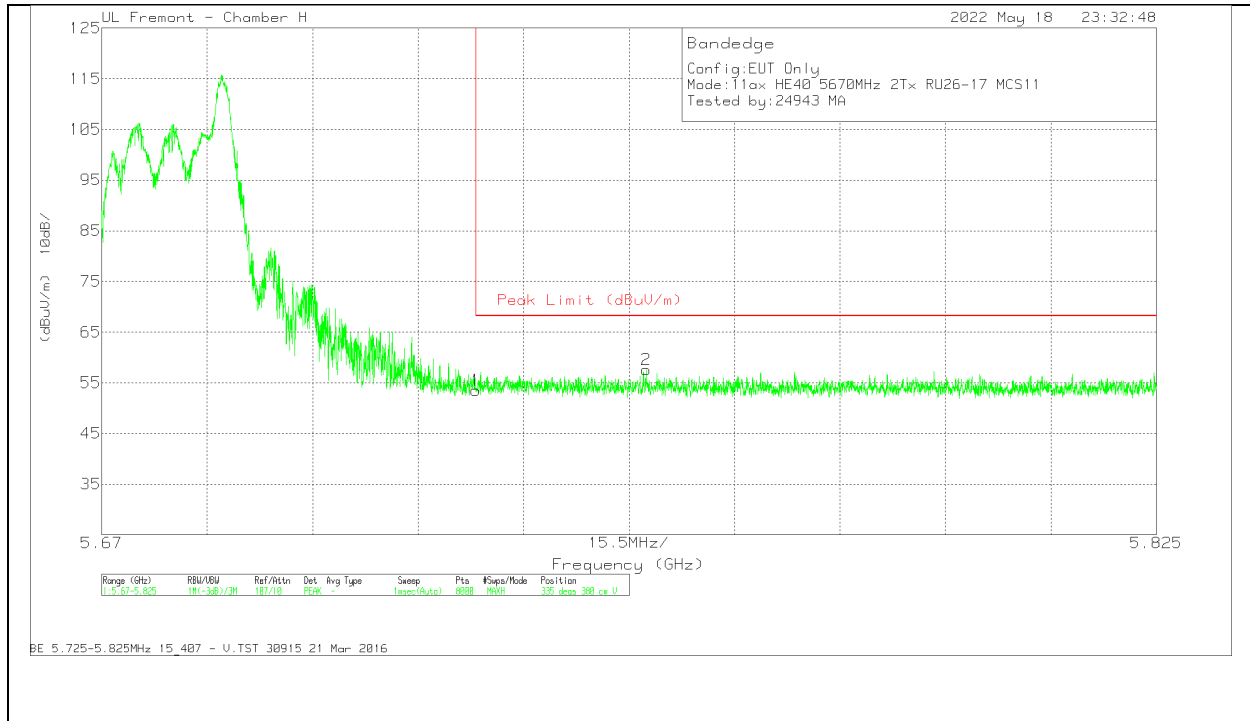


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dB/m)	Amp/Cbl/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.17	Pk	34.9	-22.6	0	53.47	68.2	-14.73	335	380	V
2	5.750027	45.16	Pk	35	-22.6	0	57.56	68.2	-10.64	335	380	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

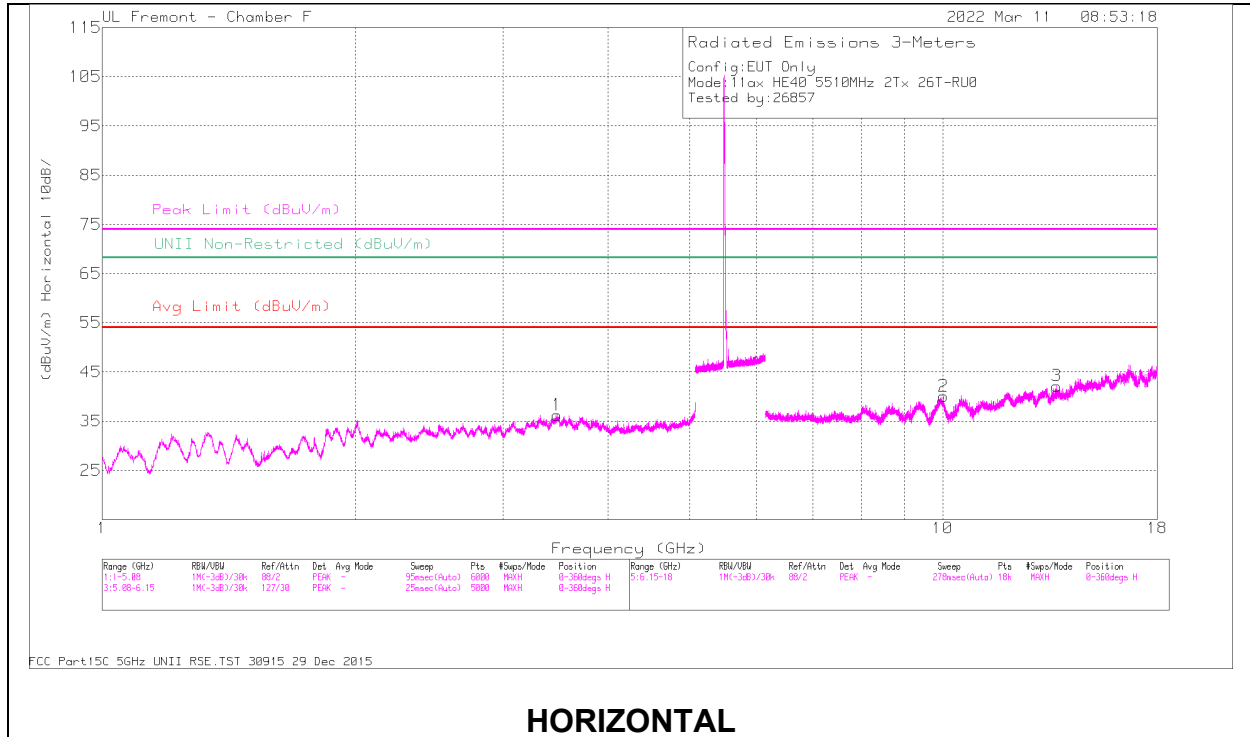

HORIZONTAL

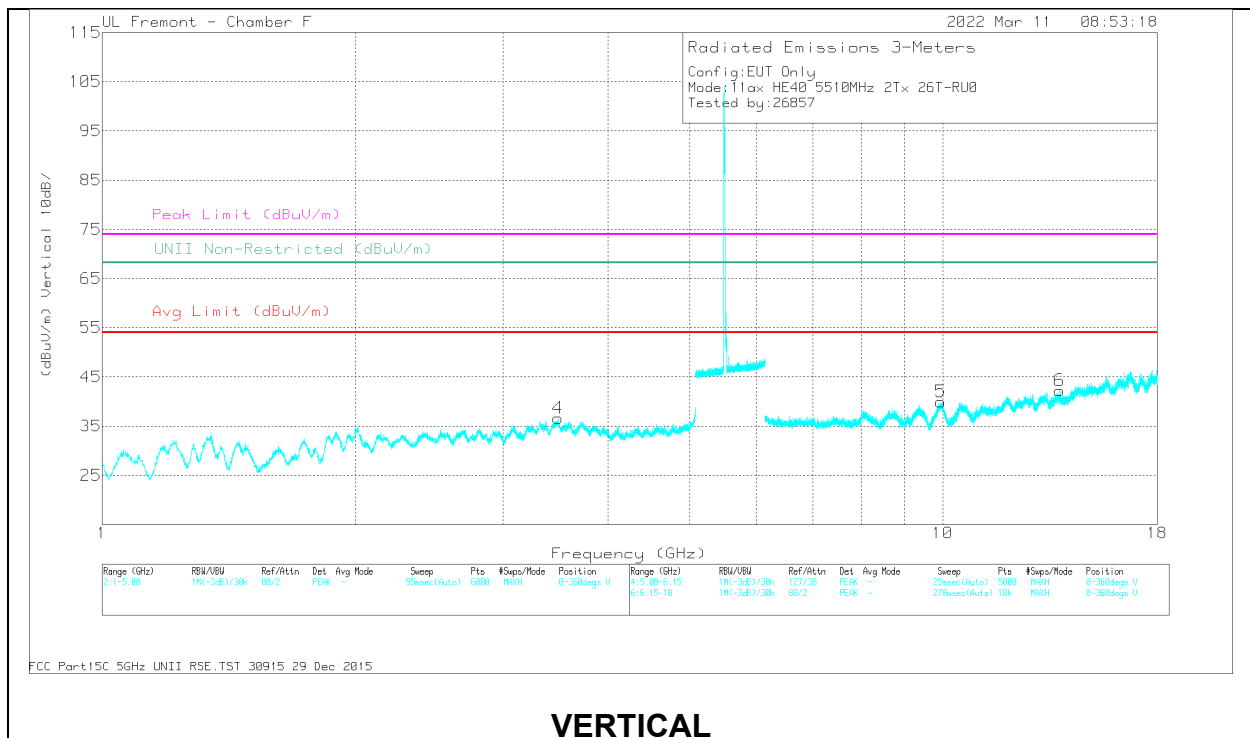

VERTICAL



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.4806	56.96	PK-U	35.5	-46.8	45.66	68.2	-22.54	75	263	H
4	3.4842	57.33	PK-U	35.5	-46.8	46.03	68.2	-22.17	332	169	V
2	10.0186	57.8	PK-U	37.2	-46	49	68.2	-19.2	238	120	H
3	13.6586	57.37	PK-U	39.1	-45.4	51.07	68.2	-17.13	298	305	H
5	9.9469	55.2	PK-U	37.1	-46.4	45.9	68.2	-22.3	61	161	V
6	13.772	57.62	PK-U	39.1	-45.2	51.52	68.2	-16.68	304	352	V

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL REUSLTS

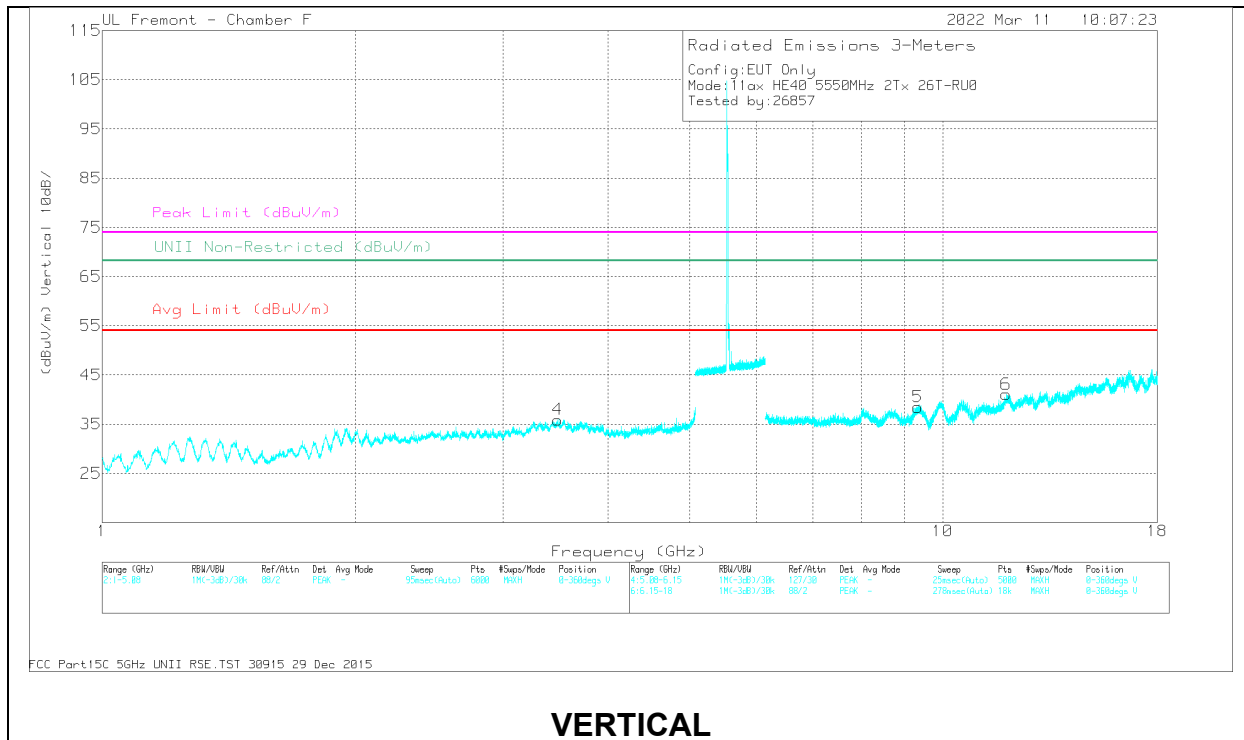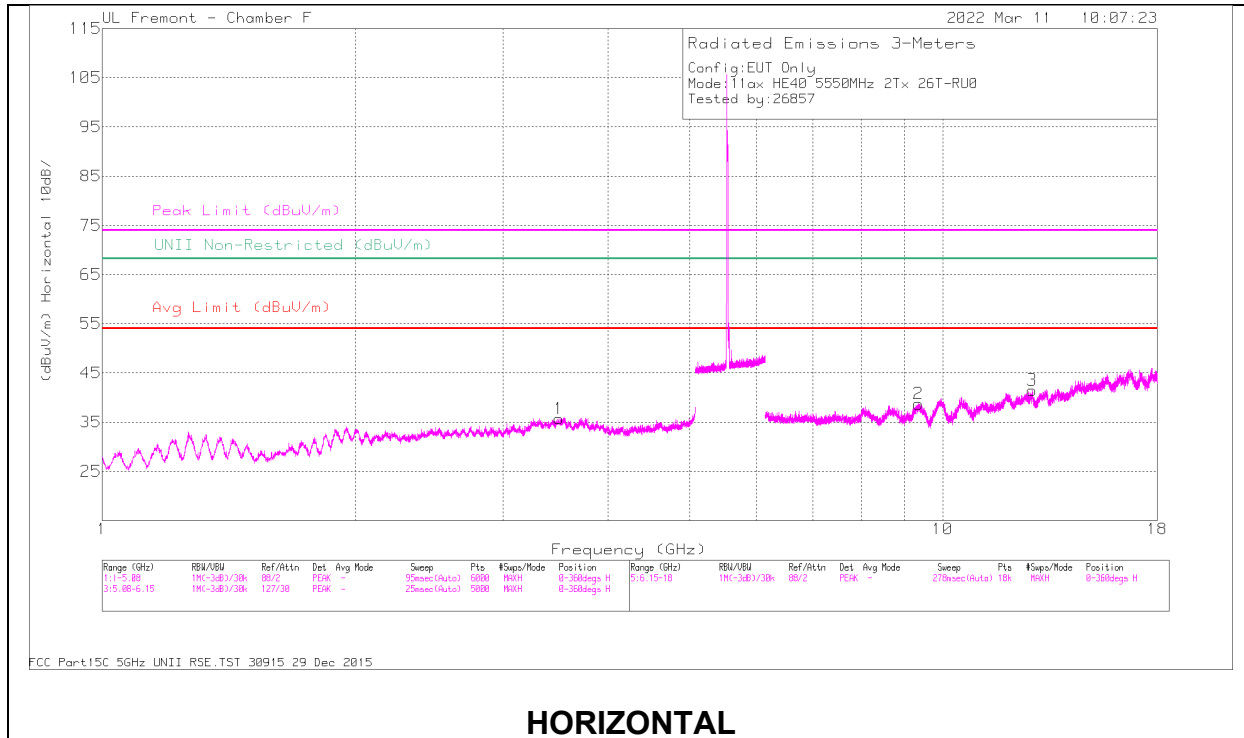

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dBm)	Amp/Cbl/F Itr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.4957	57.64	PK-U	35.5	-46.8	46.34	-	-	-	-	68.2	-21.86	248	225	H
4	3.4855	47.33	PK-U	35.5	-46.8	36.03	-	-	-	-	68.2	-32.17	133	102	V
2	* 9.3584	49.18	PK-U	36.5	-45.1	40.58	-	-	74	-33.42	-	-	13	141	H
	* 9.3606	37.59	ADR	36.5	-45.1	28.99	54	-25.01	-	-	-	-	13	141	H
3	12.7771	54.8	PK-U	39.7	-43.7	50.8	-	-	-	-	68.2	-17.4	110	111	H
5	* 9.3429	48.15	PK-U	36.5	-45.1	39.55	-	-	74	-34.45	-	-	311	185	V
	* 9.3416	37.04	ADR	36.5	-45.1	28.44	54	-25.56	-	-	-	-	311	185	V
6	* 11.8952	54.97	PK-U	39.1	-44.7	49.37	-	-	74	-24.63	-	-	63	301	V
	* 11.8960	43.56	ADR	39.1	-44.7	37.96	54	-16.04	-	-	-	-	63	301	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

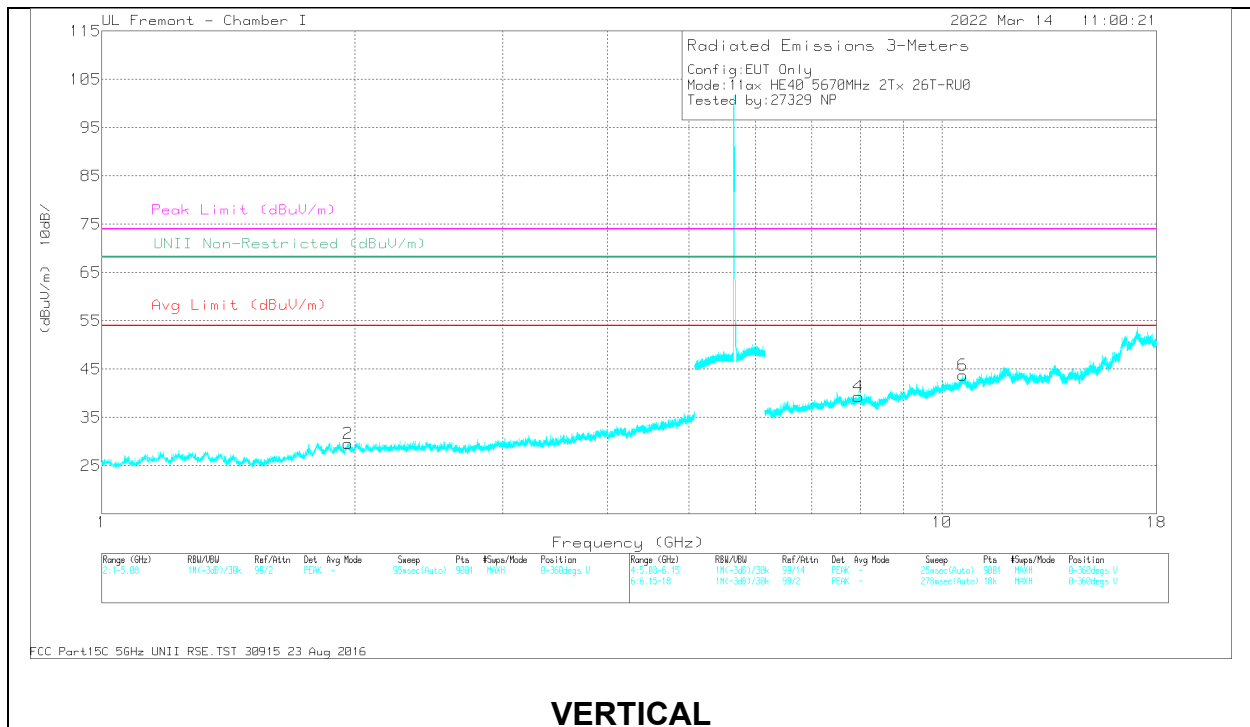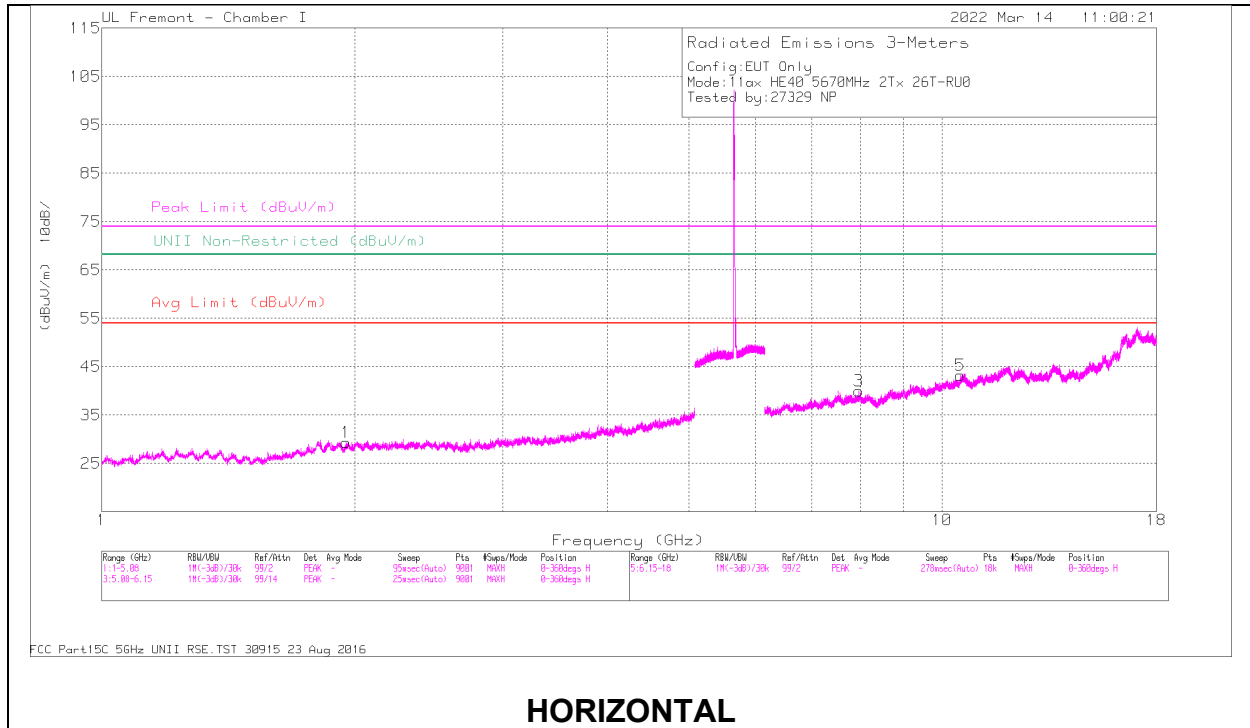


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.9535	38.99	PK-U	31	-30.5	39.49	68.2	-28.71	94	176	H
2	1.9651	38.49	PK-U	31.1	-30.5	39.09	68.2	-29.11	99	123	V
3	7.9645	31.7	PK-U	35.7	-18.6	48.8	68.2	-19.4	352	188	H
5	10.5122	31.67	PK-U	37.2	-16.7	52.17	68.2	-16.03	323	127	H
4	7.9521	32.04	PK-U	35.7	-18.8	48.94	68.2	-19.26	160	116	V
6	10.583	32.17	PK-U	37.3	-16.5	52.97	68.2	-15.23	287	199	V


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

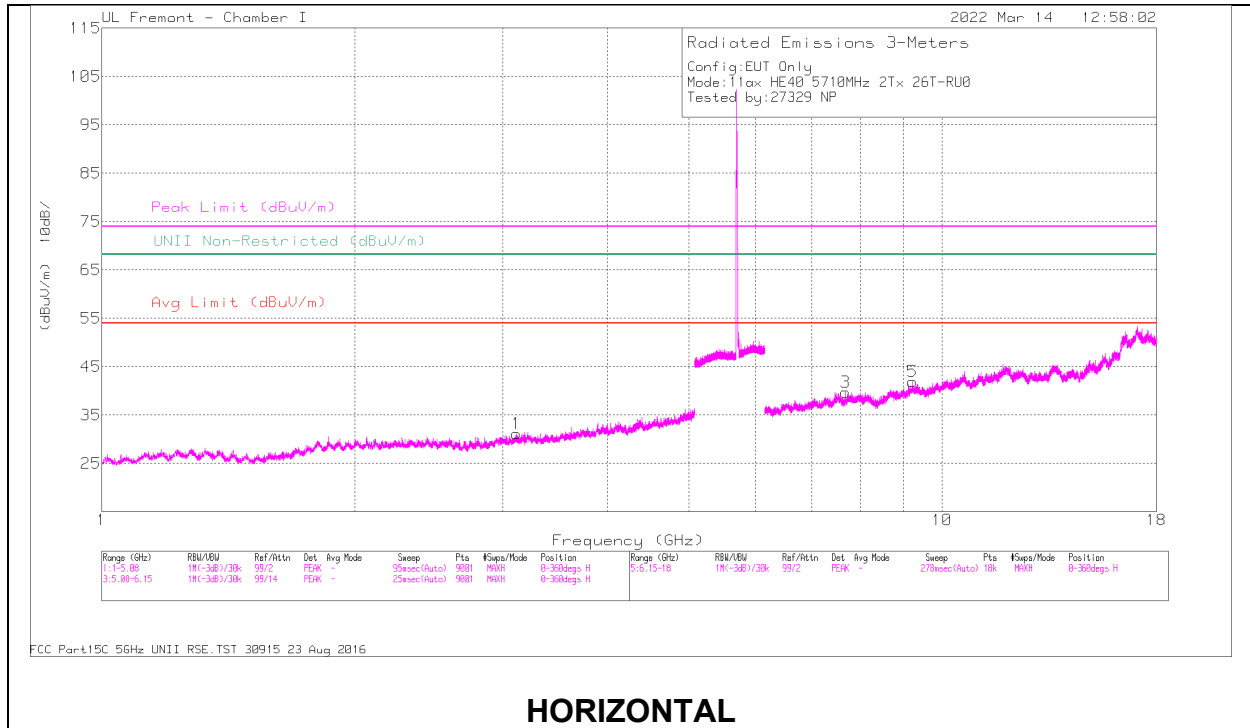

HORIZONTAL

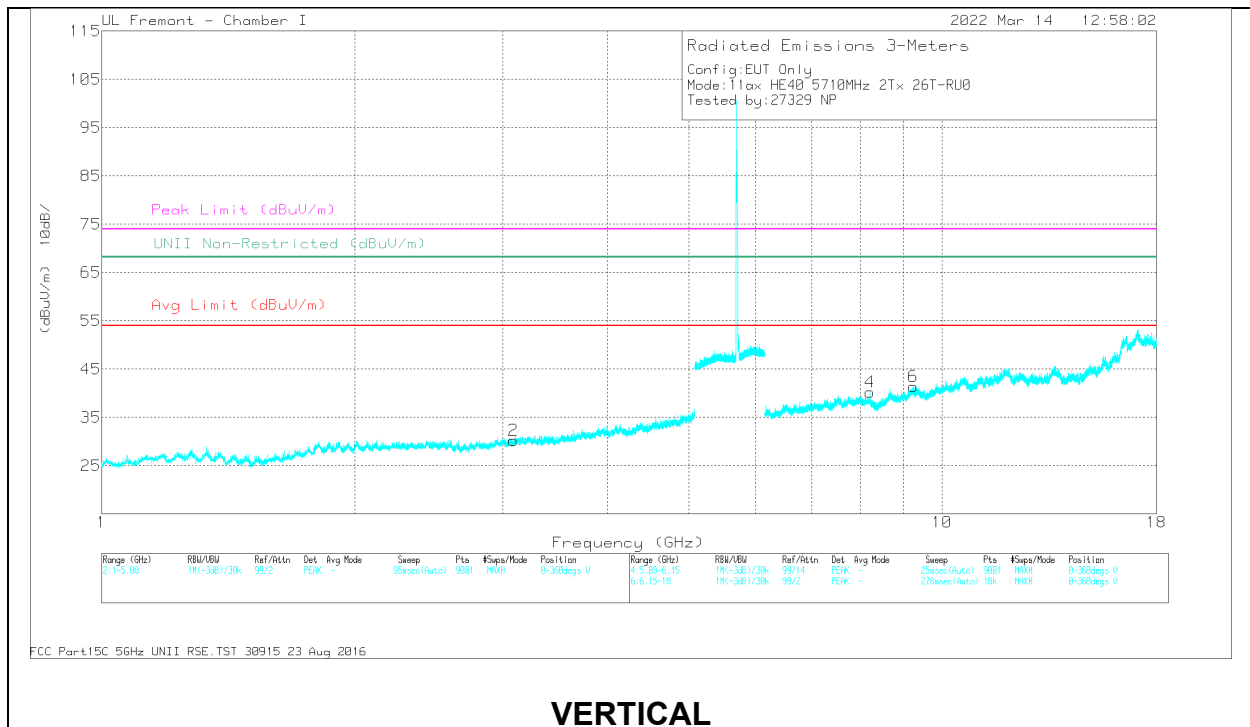

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dBm)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.1199	35.14	PK-U	32.8	-28.5	39.44	-	-	-	-	68.2	-28.76	239	153	H
2	3.0914	35.62	PK-U	32.8	-28.8	39.62	-	-	-	-	68.2	-28.58	13	301	V
3	* 7.6741	31.72	PK-U	35.7	-19.1	48.32	-	-	74	-25.68	-	-	22	198	H
	* 7.6746	20.25	ADR	35.7	-19.1	36.85	54	-17.15	-	-	-	-	22	198	H
5	9.2241	31.5	PK-U	36.2	-17	50.7	-	-	-	-	68.2	-17.5	120	134	H
4	* 8.2103	31.53	PK-U	35.6	-18.3	48.83	-	-	74	-25.17	-	-	341	169	V
	* 8.2083	19.57	ADR	35.6	-18.3	36.87	54	-17.13	-	-	-	-	341	169	V
6	9.2420	31.89	PK-U	36.2	-17.4	50.69	-	-	-	-	68.2	-17.51	32	305	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 6 + Antenna 5: SU, Single User

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

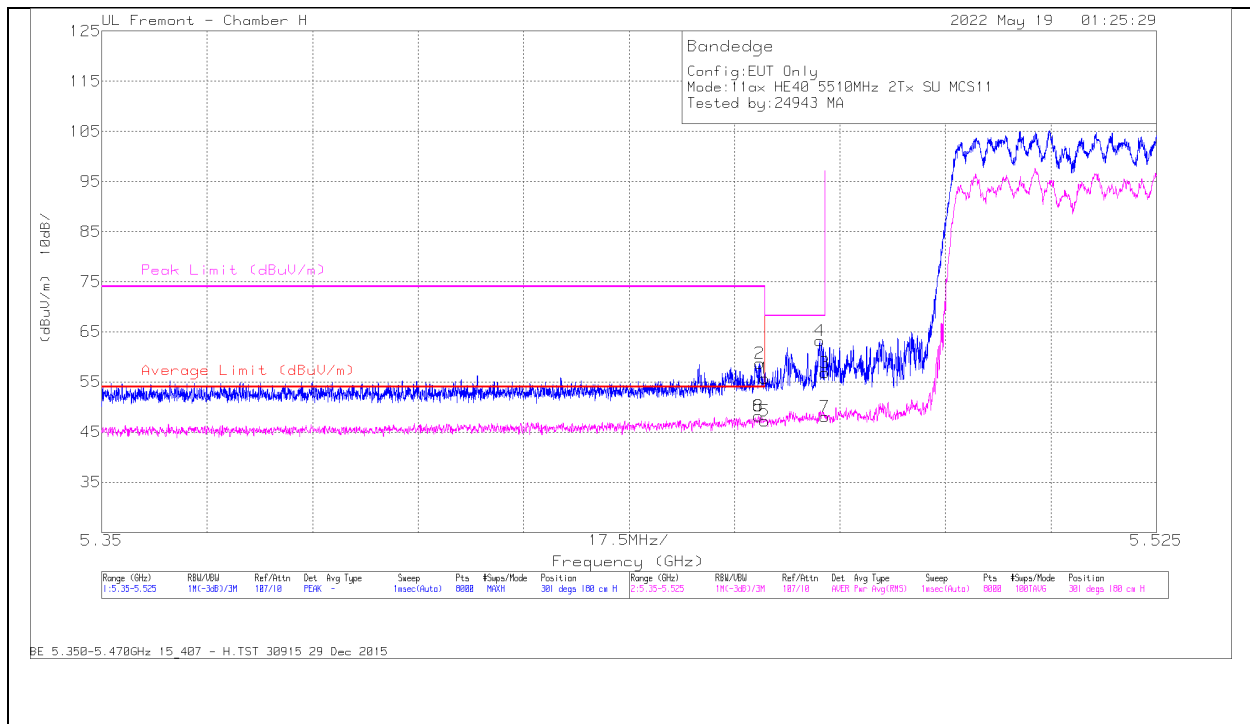


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dB/m)	Amp/Cb/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	44.31	Pk	34.8	-23.4	0	55.71	-	-	74	-18.29	301	180	H
2	* 5.459193	47.32	Pk	34.8	-23.4	0	58.72	-	-	74	-15.28	301	180	H
5	* 5.46	34.98	RMS	34.8	-23.4	.80	47.18	54	-6.82	-	-	301	180	H
6	* 5.458952	36	RMS	34.8	-23.4	.80	48.20	54	-5.80	-	-	301	180	H
4	5.469126	51.6	Pk	34.9	-23.3	0	63.2	-	-	68.2	-5	301	180	H
3	5.47	45.19	Pk	34.9	-23.2	0	56.89	-	-	68.2	-11.31	301	180	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

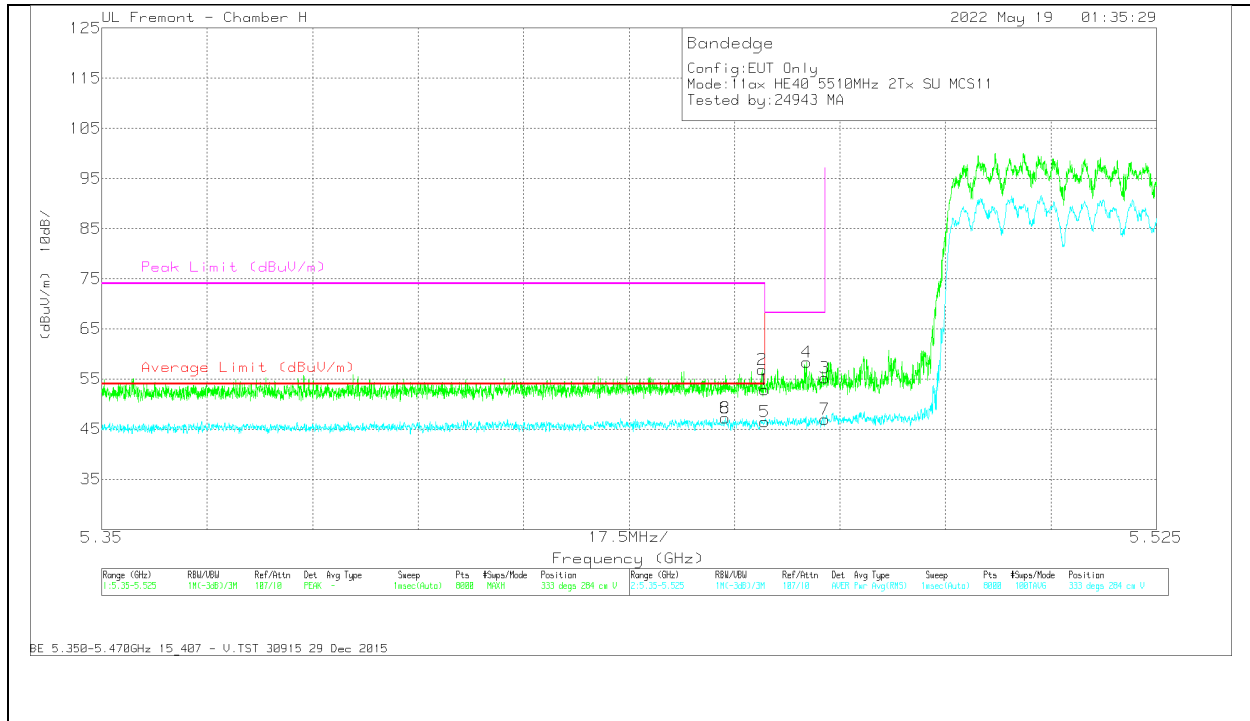


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dBm)	Amp/Cbl/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.47	Pk	34.8	-23.4	0	52.87	-	-	74	-21.13	333	284	V
2	* 5.459565	45.4	Pk	34.8	-23.4	0	56.8	-	-	74	-17.2	333	284	V
5	* 5.46	34.2	RMS	34.8	-23.4	.80	46.40	54	-7.60	-	-	333	284	V
6	* 5.453461	34.96	RMS	34.8	-23.4	.80	47.16	54	-6.84	-	-	333	284	V
4	5.46696	46.72	Pk	34.9	-23.3	0	58.32	-	-	68.2	-9.88	333	284	V
3	5.47	43.57	Pk	34.9	-23.2	0	55.27	-	-	68.2	-12.93	333	284	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

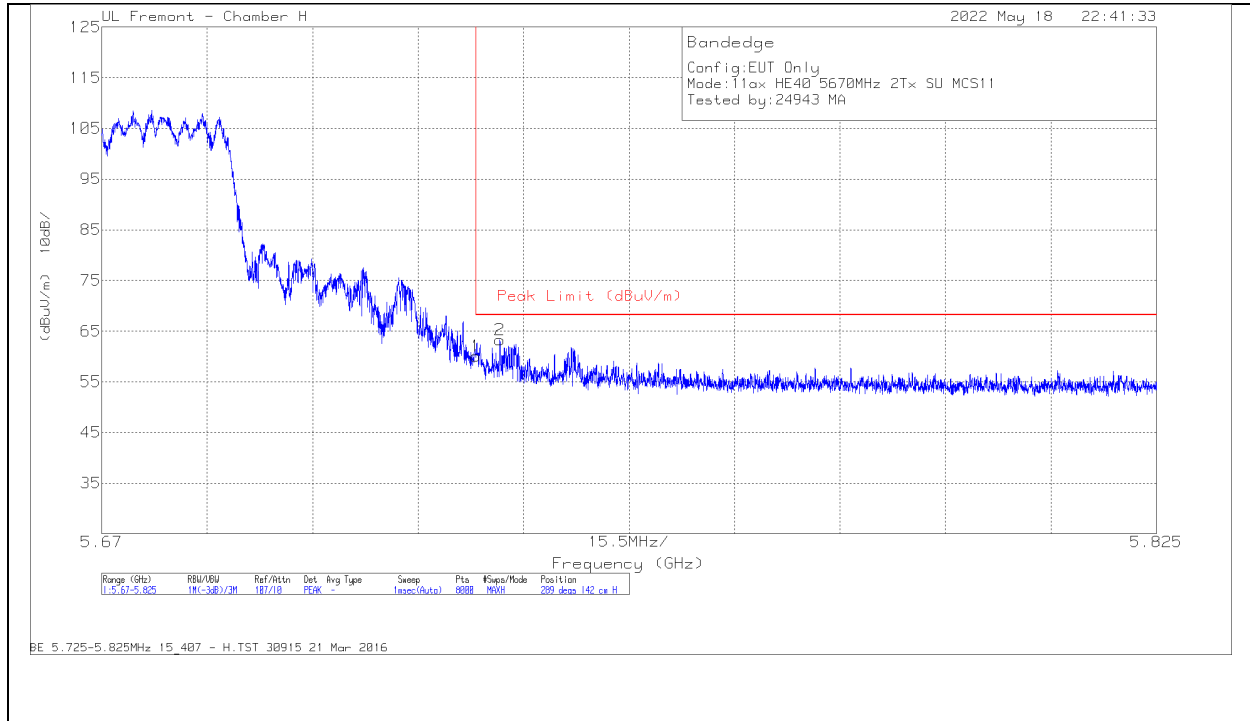

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dB/m)	Amp/Cbl/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	47.74	Pk	34.9	-22.6	0	60.04	68.2	-8.16	289	142	H
2	5.728519	60.92	Pk	35	-22.6	0	63.32	68.2	-4.88	289	142	H

Pk - Peak detector

VERTICAL RESULT

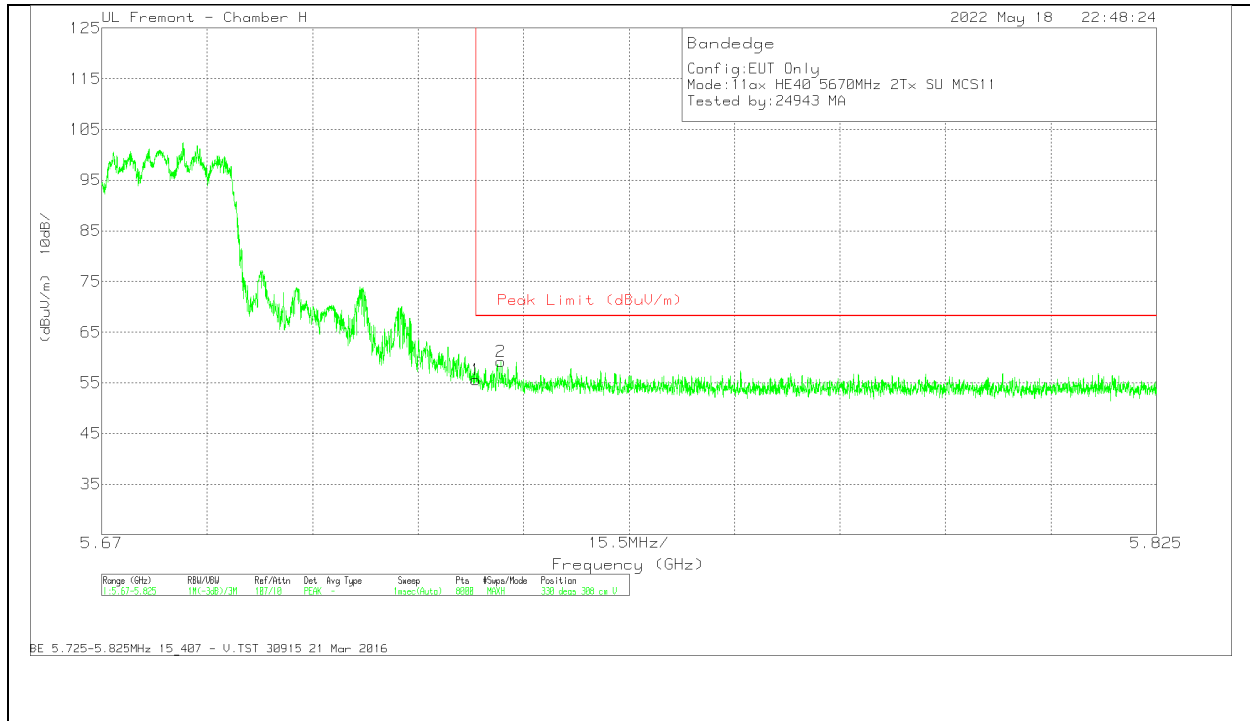


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 80430 (dB/m)	Amp/Cbl/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.29	Pk	34.9	-22.6	0	55.59	68.2	-12.61	330	308	V
2	5.728654	46.85	Pk	35	-22.6	0	59.25	68.2	-8.95	330	308	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

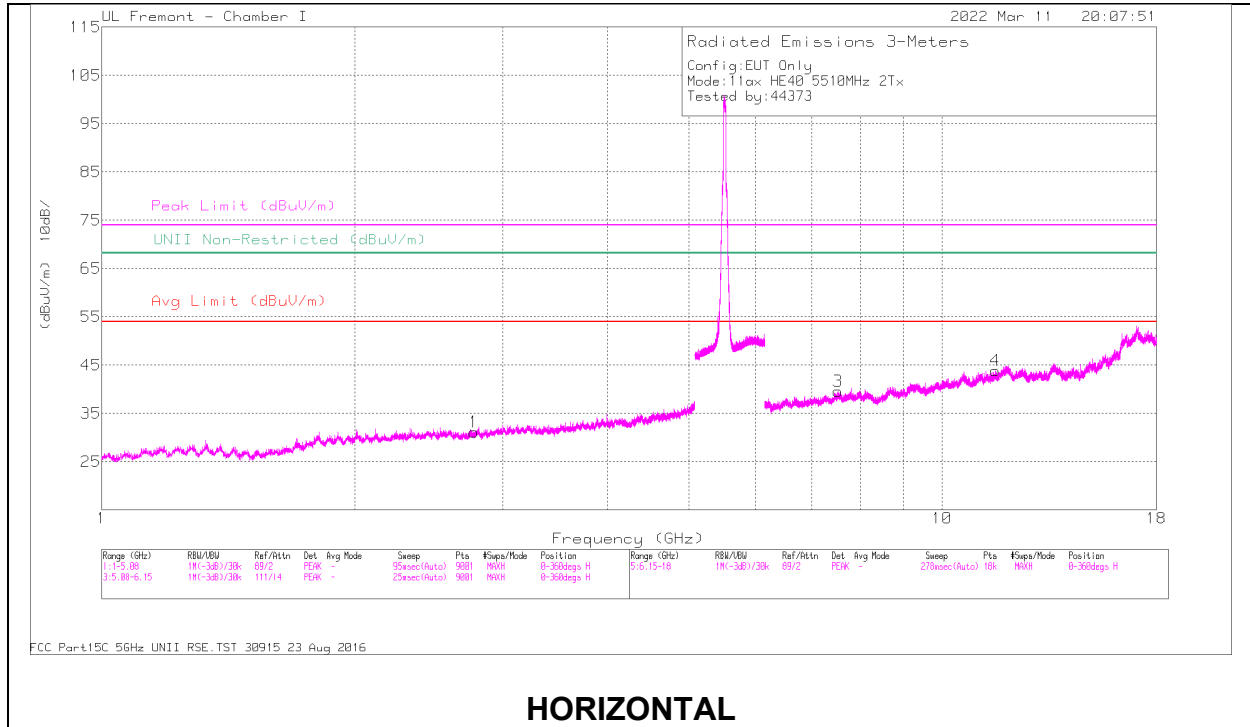

HORIZONTAL

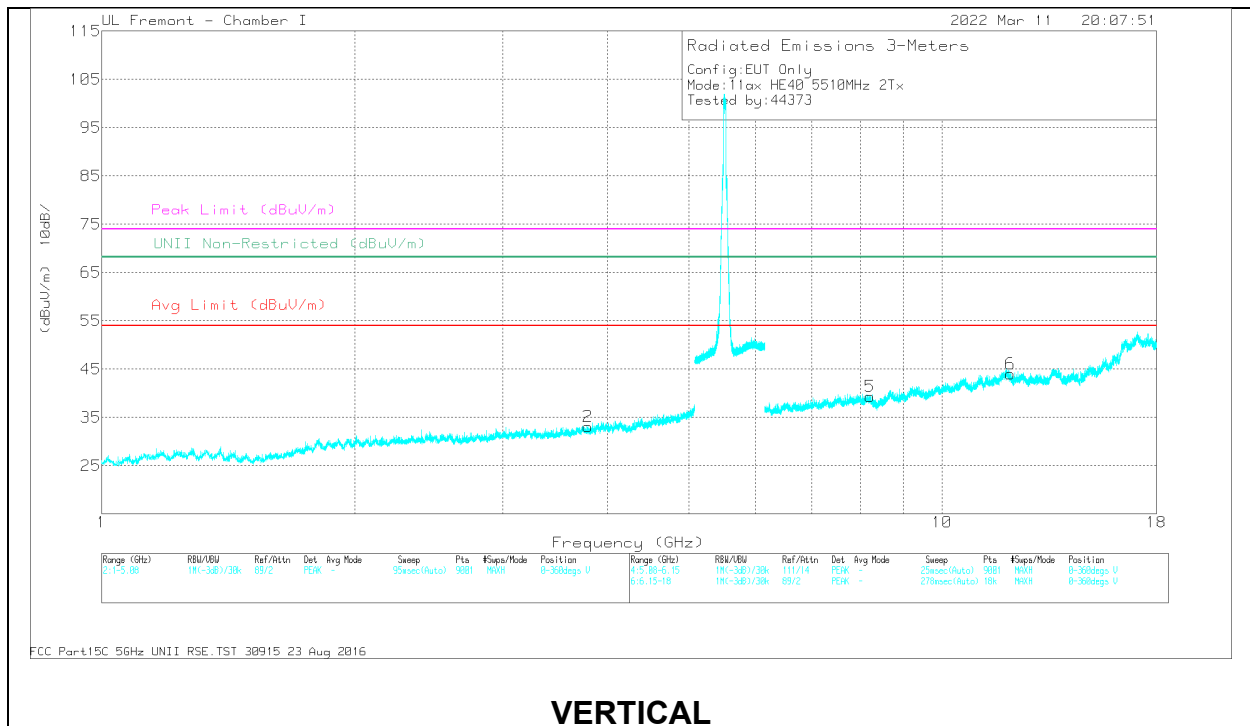

VERTICAL


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/FI triPad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.7751	38.5	PK-U	32.1	-28.6	0	42	-	-	74	-32	152	101	H
	* 2.7741	26.18	ADR	32.1	-28.6	.12	29.8	54	-24.2	-	-	152	101	H
2	* 3.7879	37.56	PK-U	33.3	-27.6	0	43.26	-	-	74	-30.74	12	213	V
	* 3.7908	26.16	ADR	33.3	-27.6	.12	31.98	54	-22.02	-	-	12	213	V
3	* 7.5281	32.6	PK-U	35.7	-18.8	0	49.5	-	-	74	-24.5	65	142	H
	* 7.5248	20.48	ADR	35.7	-18.7	.12	37.6	54	-16.4	-	-	65	142	H
4	* 11.5781	31.01	PK-U	38.3	-16.5	0	52.81	-	-	74	-21.19	166	207	H
	* 11.5800	19.66	ADR	38.3	-16.6	.12	41.48	54	-12.52	-	-	166	207	H
5	* 8.2114	32	PK-U	35.6	-18.3	0	49.3	-	-	74	-24.7	28	172	V
	* 8.2114	20.23	ADR	35.6	-18.4	.12	37.55	54	-16.45	-	-	28	172	V
6	* 12.0557	31.07	PK-U	38.5	-16.2	0	53.37	-	-	74	-20.63	36	110	V
	* 12.0553	19.99	ADR	38.5	-16.2	.12	42.41	54	-11.59	-	-	36	110	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CAHNNEL RESULTS

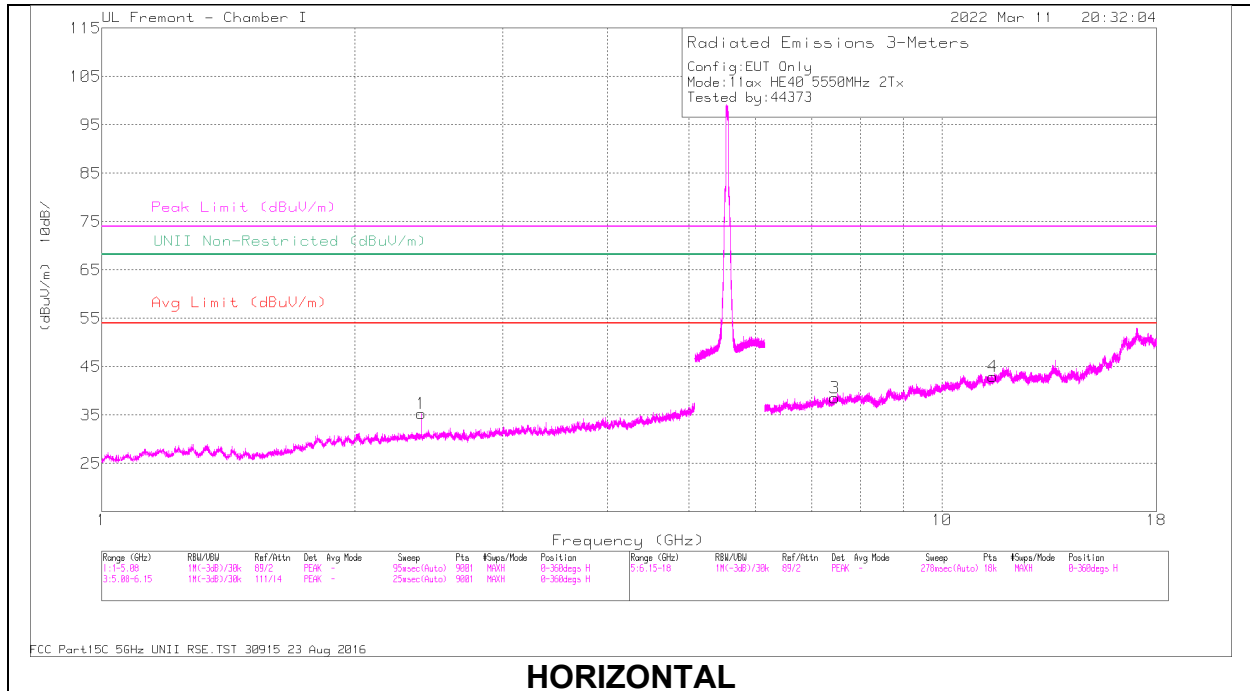

HORIZONTAL

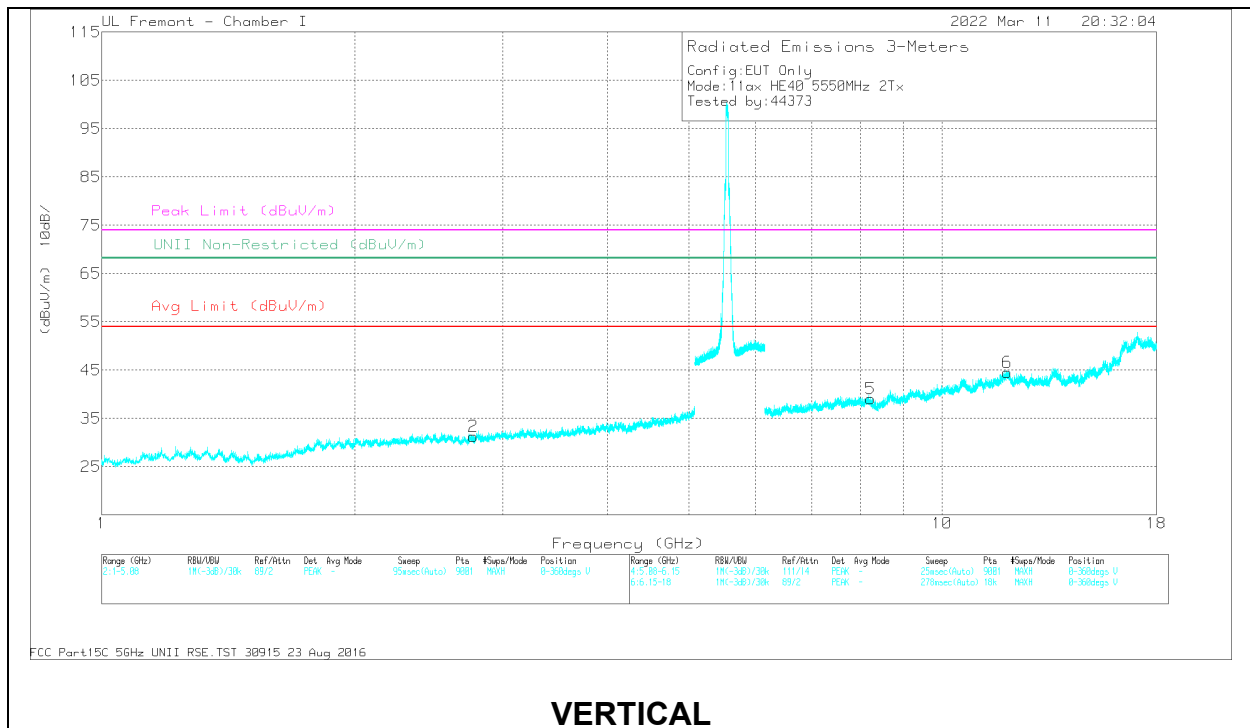

VERTICAL



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dBm)	Amp/Cbl/F In/Fed (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4018	40.75	PK-U	31.9	-29.8	0	42.85	-	-	-	-	68.2	-25.35	78	206	H
2	* 2.7700	36.74	PK-U	32.1	-28.6	0	40.24	-	-	74	-33.76	-	-	153	161	V
	* 2.7701	25.4	ADR	32.1	-28.6	.12	29.02	54	-24.98	-	-	-	-	153	161	V
3	* 7.4513	31.5	PK-U	35.6	-19.1	0	48	-	-	74	-26	-	-	45	217	H
	* 7.4526	20.23	ADR	35.6	-19.1	.12	36.85	54	-17.15	-	-	-	-	45	217	H
4	* 11.5008	30.96	PK-U	38.2	-16.6	0	52.56	-	-	74	-21.44	-	-	63	136	H
	* 11.5006	19.34	ADR	38.2	-16.6	.12	41.06	54	-12.94	-	-	-	-	63	136	H
5	* 8.2299	31.34	PK-U	35.6	-18.6	0	48.34	-	-	74	-25.66	-	-	117	245	V
	* 8.2311	19.89	ADR	35.6	-18.6	.12	37.01	54	-16.99	-	-	-	-	117	245	V
6	* 11.955	31.58	PK-U	38.5	-16.3	0	53.78	-	-	74	-20.22	-	-	302	198	V
	* 11.956	20.12	ADR	38.5	-16.3	.12	42.44	54	-11.56	-	-	-	-	302	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

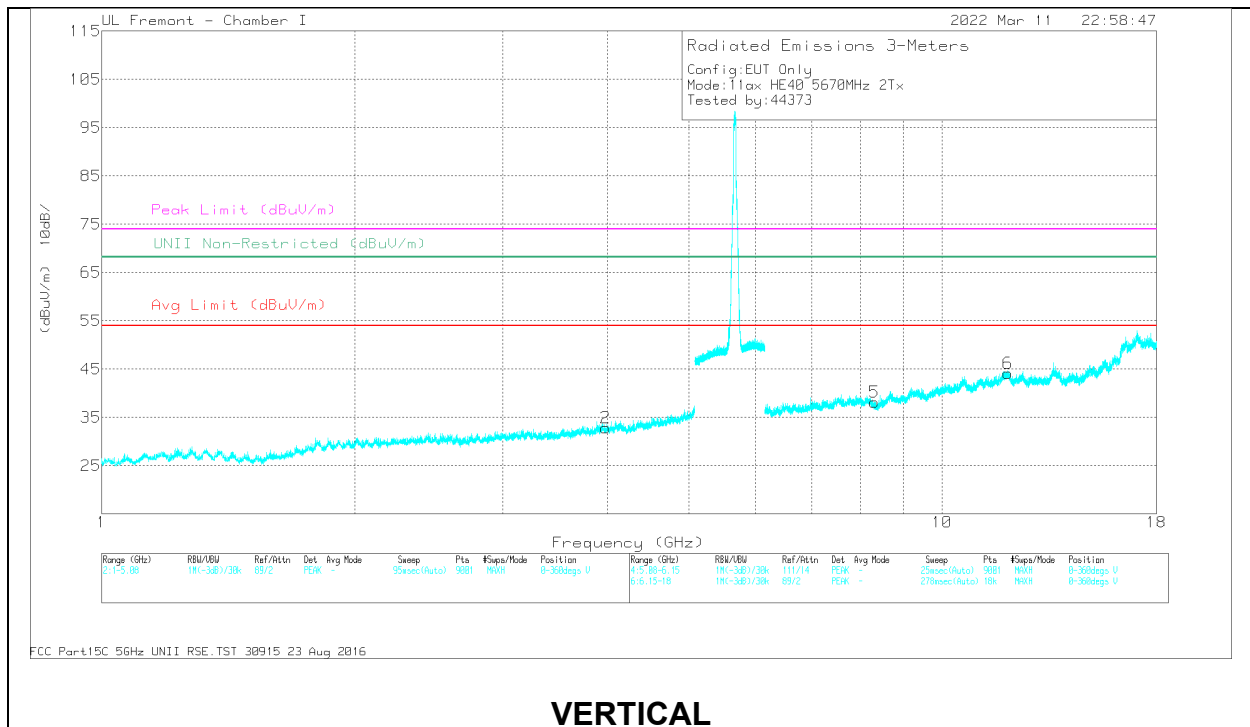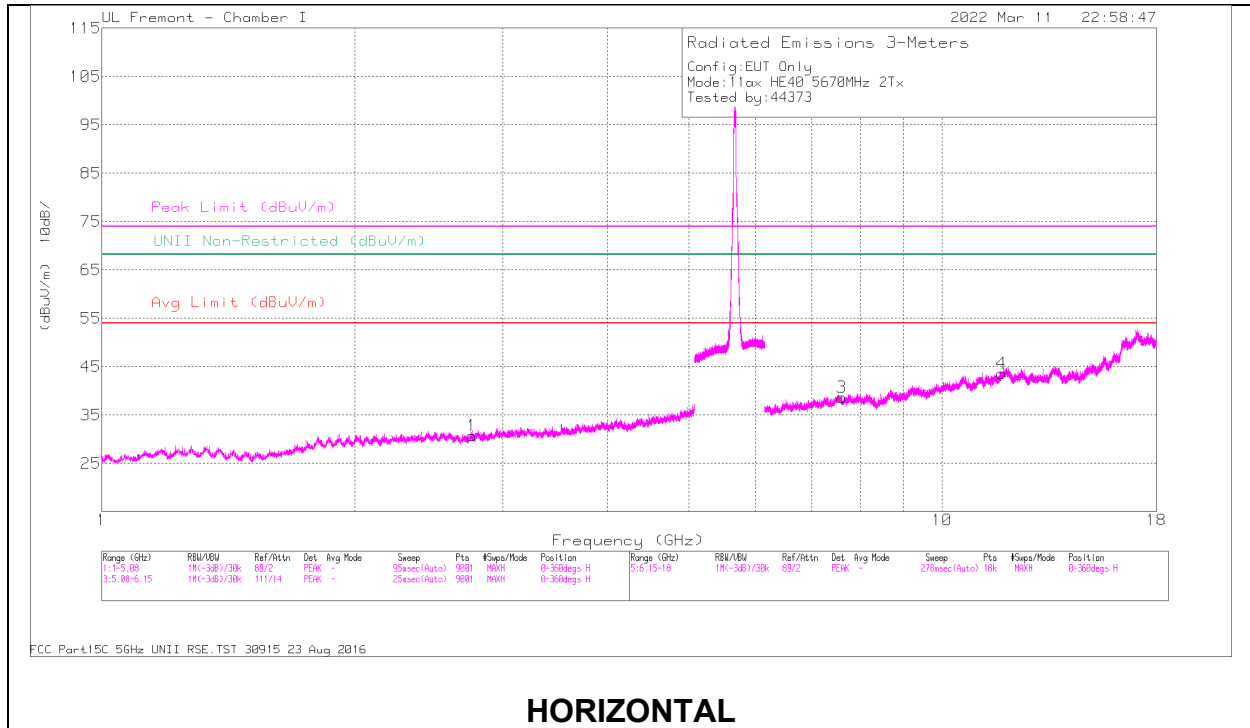

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.7609	37.84	PK-U	32.1	-28.8	0	41.14	-	-	74	-32.86	5	176	H
	* 2.7593	26.25	ADR	32	-28.9	.12	29.47	54	-24.53	-	-	5	176	H
2	* 3.9778	36.73	PK-U	33.5	-27.2	0	43.03	-	-	74	-30.97	107	143	V
	* 3.9755	25.23	ADR	33.5	-27.2	.12	31.65	54	-22.35	-	-	107	143	V
3	* 7.6074	32.47	PK-U	35.7	-19.5	0	48.67	-	-	74	-25.33	54	191	H
	* 7.6064	20.55	ADR	35.7	-19.5	.12	36.87	54	-17.13	-	-	54	191	H
4	* 11.77	32.35	PK-U	38.5	-16.2	0	54.65	-	-	74	-19.35	79	261	H
	* 11.7771	19.99	ADR	38.5	-16.2	.12	42.41	54	-11.59	-	-	79	261	H
5	* 8.3039	31.46	PK-U	35.6	-18.7	0	48.36	-	-	74	-25.64	238	106	V
	* 8.3049	19.59	ADR	35.6	-18.7	.12	36.61	54	-17.39	-	-	238	106	V
6	* 11.985	31.86	PK-U	38.5	-16.2	0	54.16	-	-	74	-19.84	113	244	V
	* 11.9826	20.07	ADR	38.5	-16.2	.12	42.49	54	-11.51	-	-	113	244	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

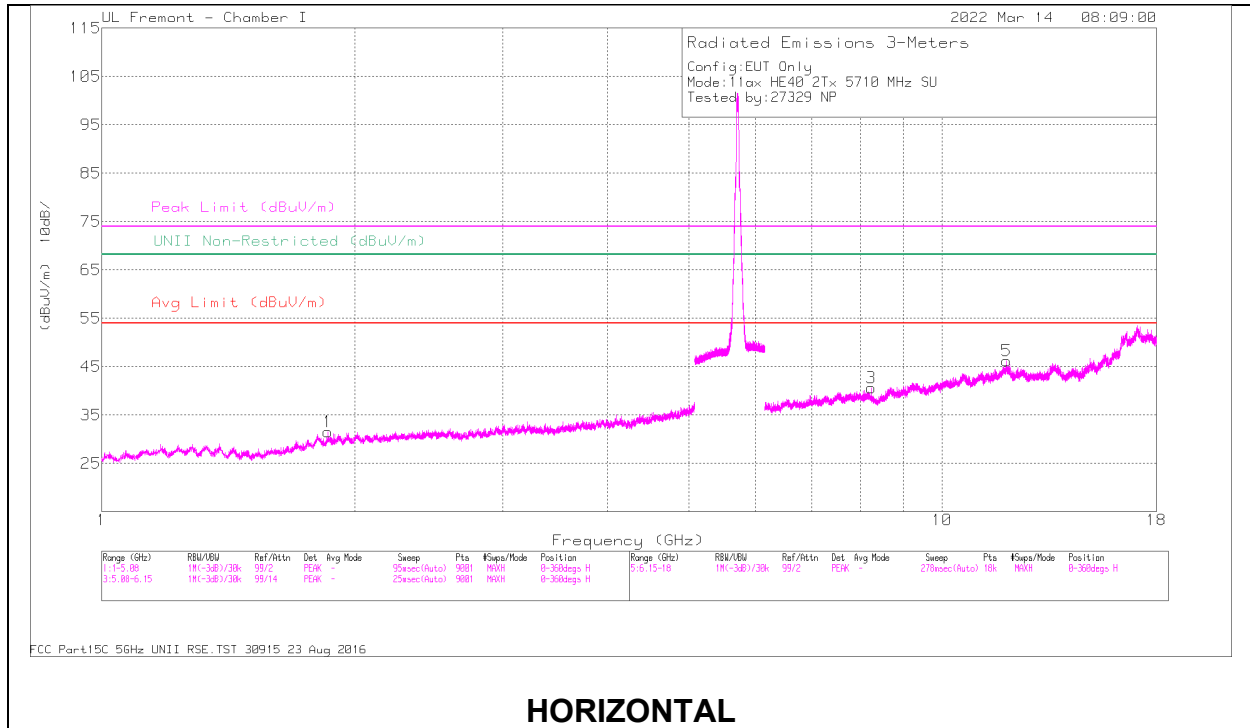

HORIZONTAL

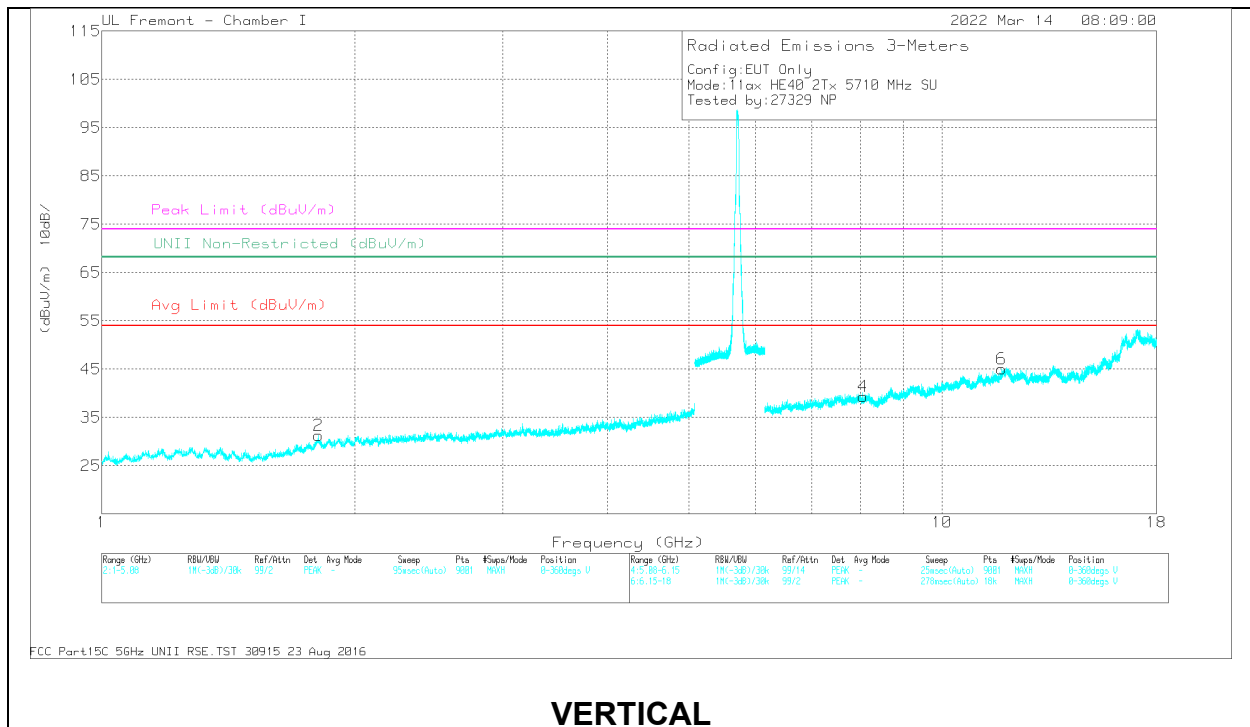

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dBm)	Amp/Cb/F Itr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.8586	40.12	PK-U	30.7	-30.5	0	40.32	-	-	-	-	68.2	-27.88	95	162	H
2	1.8091	39.63	PK-U	30.7	-30.3	0	40.03	-	-	-	-	68.2	-28.17	246	247	V
3	* 8.2348	31.36	PK-U	35.6	-18.5	0	48.46	-	-	74	-25.54	-	-	275	274	H
	* 8.2334	19.88	ADR	35.6	-18.6	.12	37	54	-17	-	-	-	-	275	274	H
5	* 11.9433	32.02	PK-U	38.5	-16.1	0	54.42	-	-	74	-19.58	-	-	98	119	H
	* 11.9419	20.08	ADR	38.5	-16.1	.12	42.6	54	-11.4	-	-	-	-	98	119	H
4	* 8.0517	31.51	PK-U	35.7	-18.8	0	48.41	-	-	74	-25.59	-	-	180	290	V
	* 8.0512	19.96	ADR	35.7	-18.8	.12	36.98	54	-17.02	-	-	-	-	180	290	V
6	* 11.7696	31.91	PK-U	38.5	-16.2	0	54.21	-	-	74	-19.79	-	-	223	312	V
	* 11.7679	20.07	ADR	38.5	-16.3	.12	42.39	54	-11.61	-	-	-	-	223	312	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.2.18. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6 GHz BAND

1TX Antenna 6: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

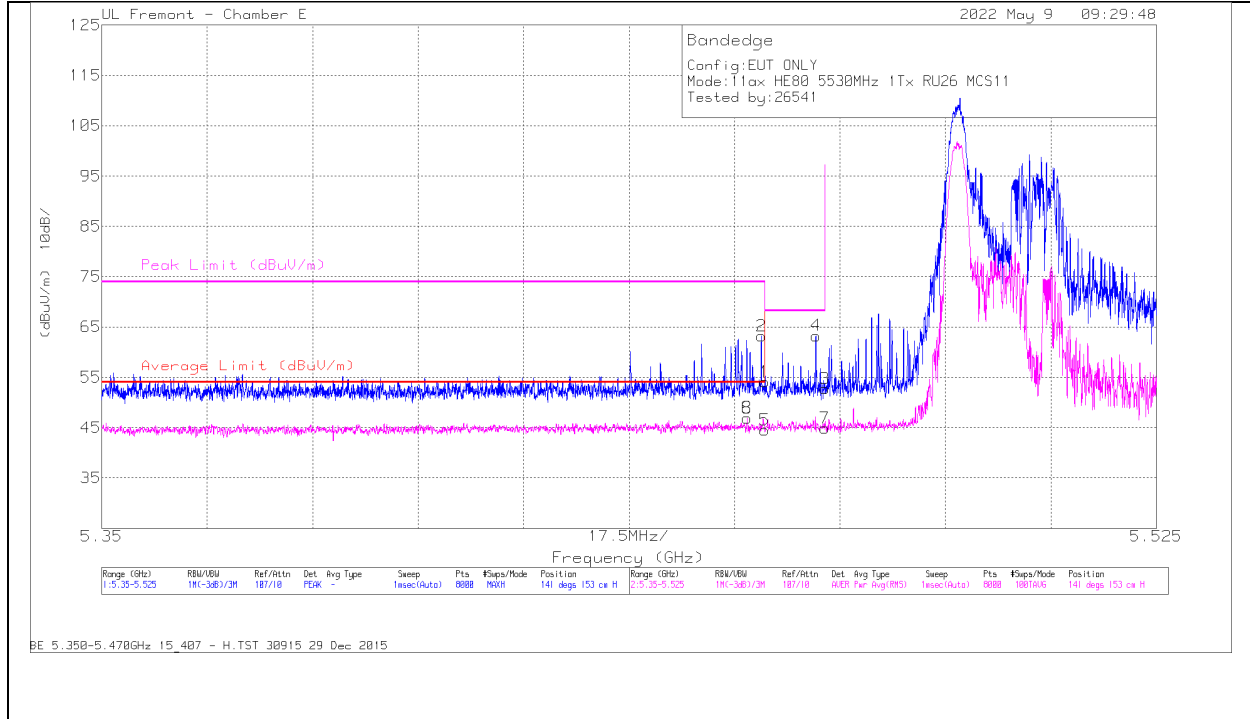


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.45	Pk	34.4	-20.7	0	54.15	-	-	74	-19.85	141	153	H
2	* 5.459456	49.52	Pk	34.4	-20.7	0	63.22	-	-	74	-10.78	141	153	H
5	* 5.46	30.84	RMS	34.4	-20.7	0.45	44.99	54	-9.01	-	-	141	153	H
6	* 5.457093	33.25	RMS	34.4	-20.7	0.45	47.40	54	-6.60	-	-	141	153	H
4	5.468491	49.58	Pk	34.4	-20.7	0	63.28	-	-	68.2	-4.92	141	153	H
3	5.47	39.05	Pk	34.4	-20.7	0	52.75	-	-	68.2	-15.45	141	153	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

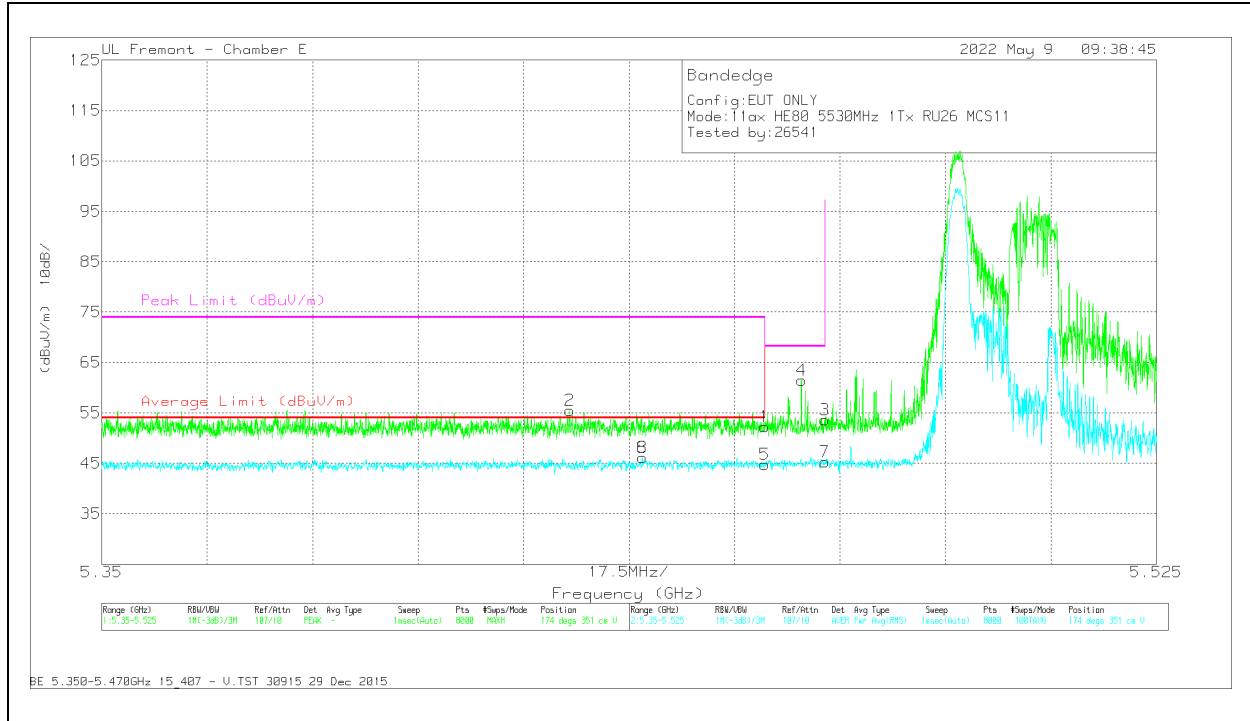

Marker	Frequency (GHz)	Motor Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.6	Pk	34.4	-20.7	0	52.3	-	-	74	-21.70	174	351	V
2	* 5.427667	41.83	Pk	34.4	-20.7	0	55.53	-	-	74	-18.47	174	351	V
5	* 5.46	31.05	RMS	34.4	-20.7	0.45	45.20	54	-8.80	-	-	174	351	V
6	* 5.439678	32.46	RMS	34.4	-20.7	0.45	46.61	54	-7.39	-	-	174	351	V
4	5.466107	47.72	Pk	34.4	-20.7	0	61.42	-	-	68.2	-6.78	174	351	V
3	5.47	39.87	Pk	34.4	-20.7	0	53.57	-	-	68.2	-14.63	174	351	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

1TX Antenna 6: SU, Single User

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

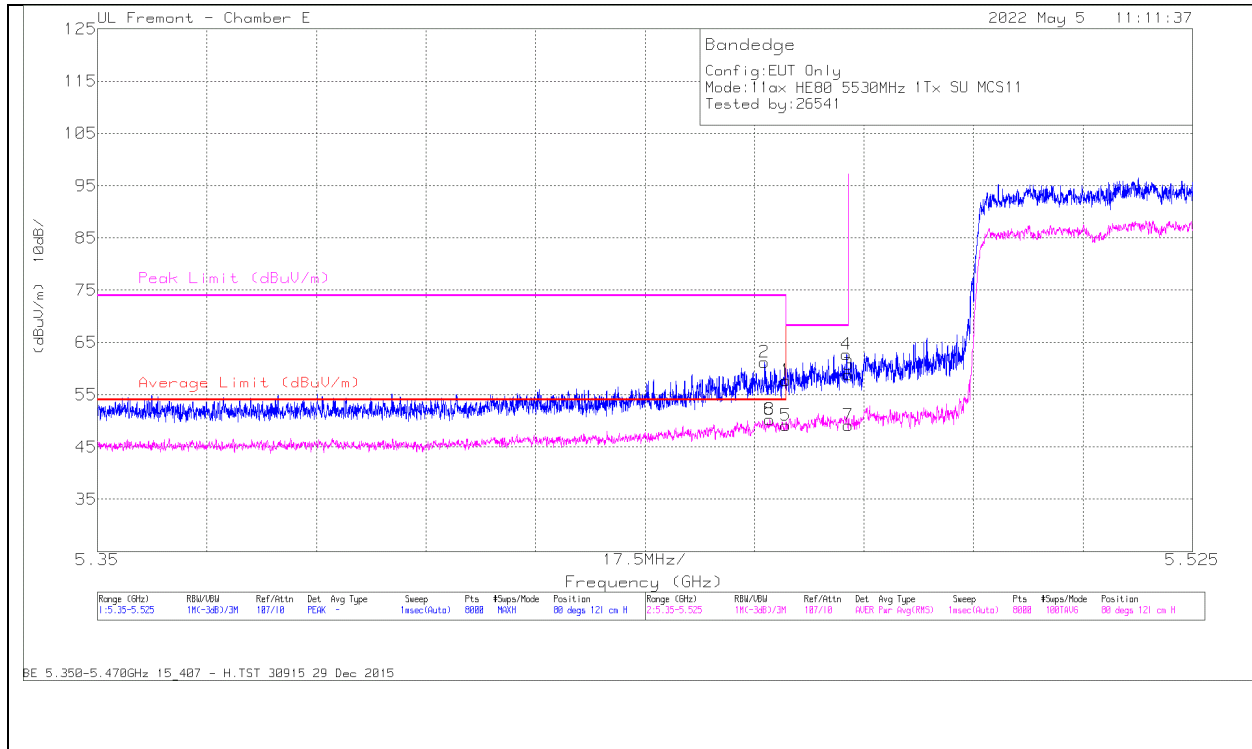


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	44.06	Pk	34.4	-20.7	0	57.76	-	-	74	-16.24	80	121	H
2	* 5.456611	47.52	Pk	34.4	-20.7	0	61.22	-	-	74	-12.78	80	121	H
5	* 5.46	34.48	RMS	34.4	-20.7	.97	49.15	54	-4.85	-	-	80	121	H
6	* 5.457443	35.6	RMS	34.4	-20.7	.97	50.27	54	-3.73	-	-	80	121	H
4	5.469716	49	Pk	34.4	-20.7	0	62.7	-	-	68.2	-5.5	80	121	H
3	5.47	45.19	Pk	34.4	-20.7	0	58.89	-	-	68.2	-9.31	80	121	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

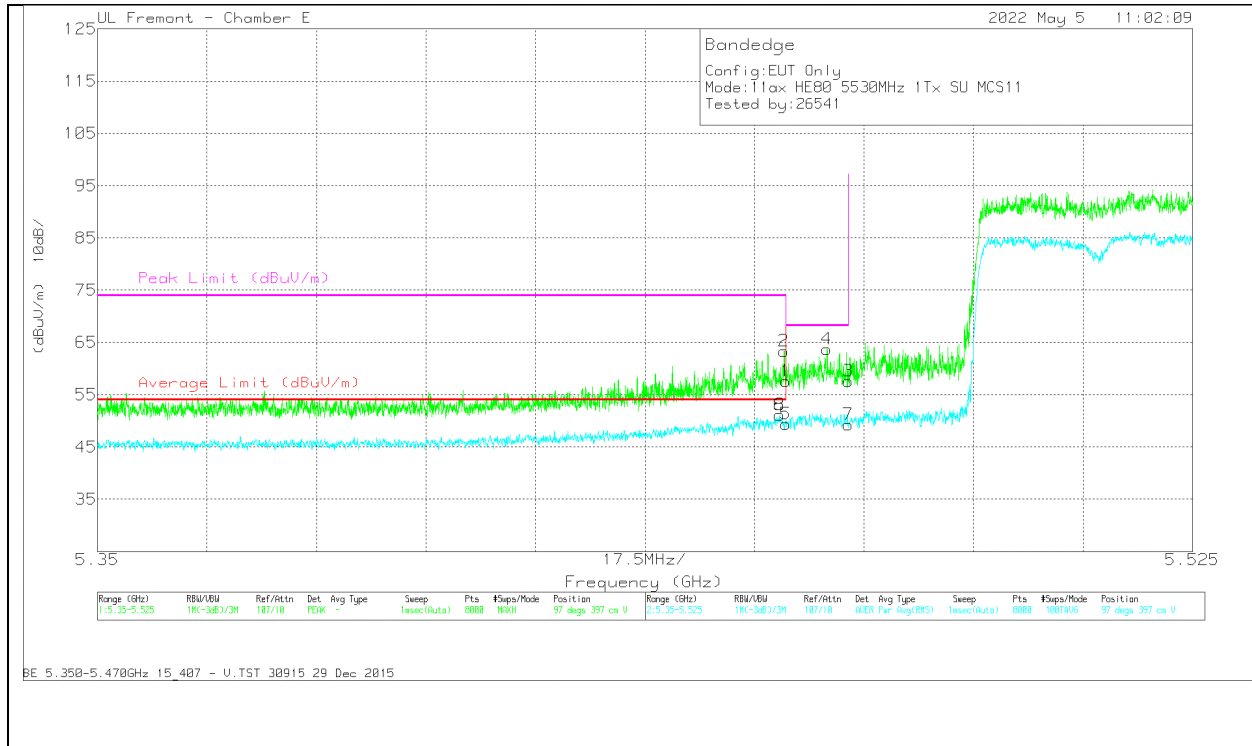

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	43.86	Pk	34.4	-20.7	0	57.56	-	-	74	-16.44	97	397	V
2	* 5.45974	49.65	Pk	34.4	-20.7	0	63.35	-	-	74	-10.65	97	397	V
5	* 5.46	34.74	RMS	34.4	-20.7	.97	49.41	54	-4.59	-	-	97	397	V
6	* 5.459018	36.52	RMS	34.4	-20.7	.97	51.19	54	-2.81	-	-	97	397	V
4	5.466588	49.97	Pk	34.4	-20.7	0	63.67	-	-	68.2	-4.53	97	397	V
3	5.47	43.94	Pk	34.4	-20.7	0	57.64	-	-	68.2	-10.56	97	397	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

1TX Antenna 5: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

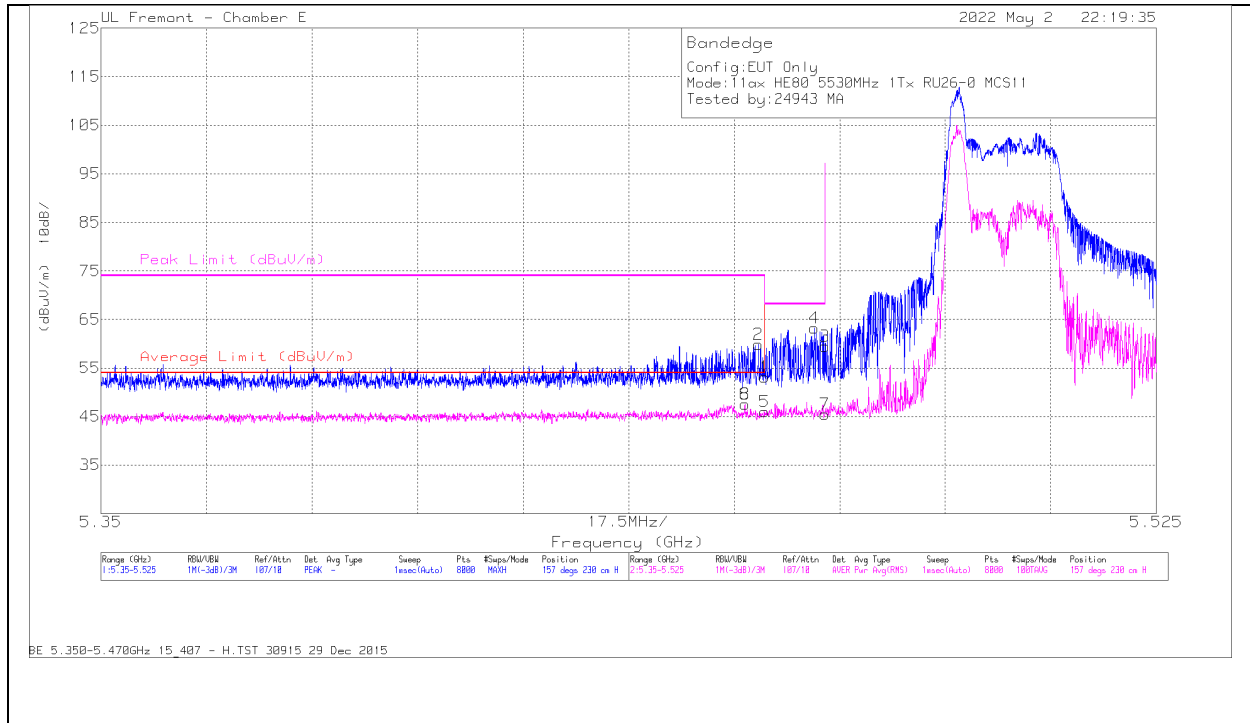


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.44	Pk	34.4	-20.7	0	53.14	-	-	74	-20.86	157	230	H
2	* 5.458996	46.19	Pk	34.4	-20.7	0	59.89	-	-	74	-14.11	157	230	H
5	* 5.46	31.77	RMS	34.4	-20.7	.45	45.92	54	-8.08	-	-	157	230	H
6	* 5.456765	33.37	RMS	34.4	-20.7	.45	47.52	54	-6.48	-	-	157	230	H
4	5.468272	49.5	Pk	34.4	-20.7	0	63.2	-	-	68.2	-5	157	230	H
3	5.47	45.76	Pk	34.4	-20.7	0	59.46	-	-	68.2	-8.74	157	230	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

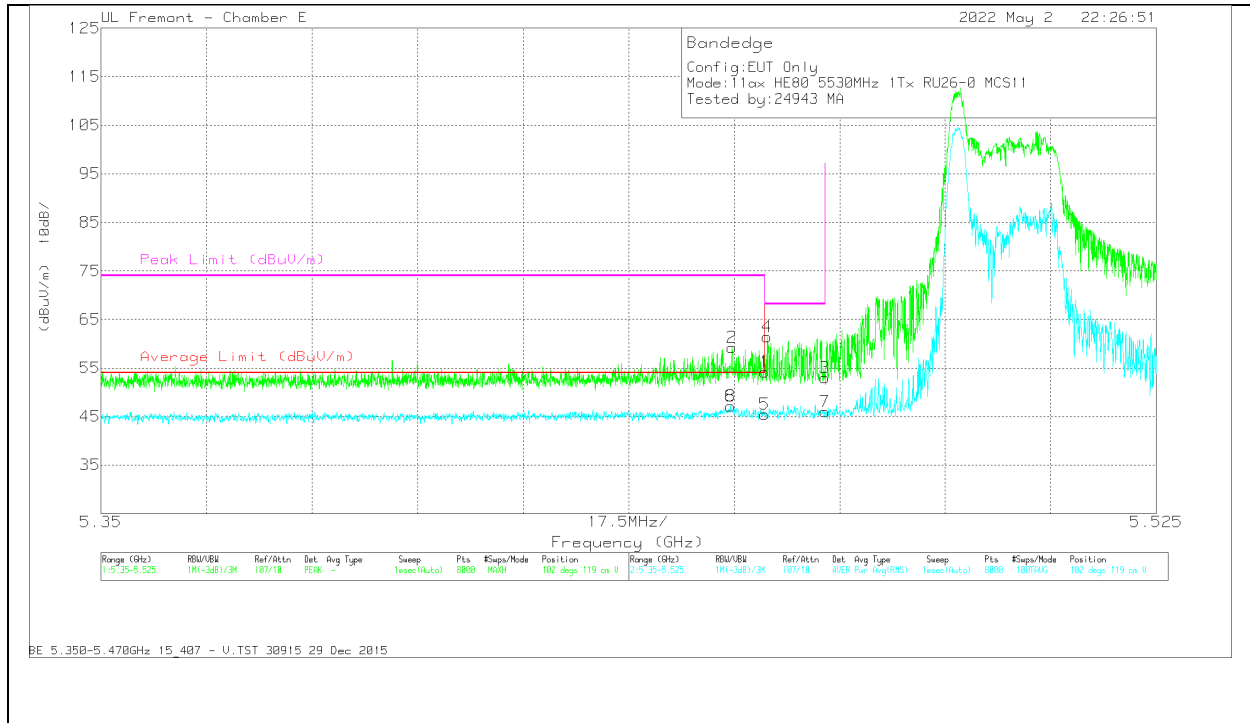

Marker	Frequency (GHz)	Motor Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.48	Pk	34.4	-20.7	0	54.18	-	-	74	-19.82	102	119	V
2	* 5.454664	45.5	Pk	34.4	-20.7	0	59.2	-	-	74	-14.8	102	119	V
5	* 5.46	31.27	RMS	34.4	-20.7	.45	45.42	54	-8.58	-	-	102	119	V
6	* 5.454402	33.01	RMS	34.4	-20.7	.45	47.16	54	-6.84	-	-	102	119	V
4	5.460484	47.7	Pk	34.4	-20.7	0	61.4	-	-	68.2	-6.8	102	119	V
3	5.47	39.34	Pk	34.4	-20.7	0	53.04	-	-	68.2	-15.16	102	119	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

1TX Antenna 5: SU, Single User

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

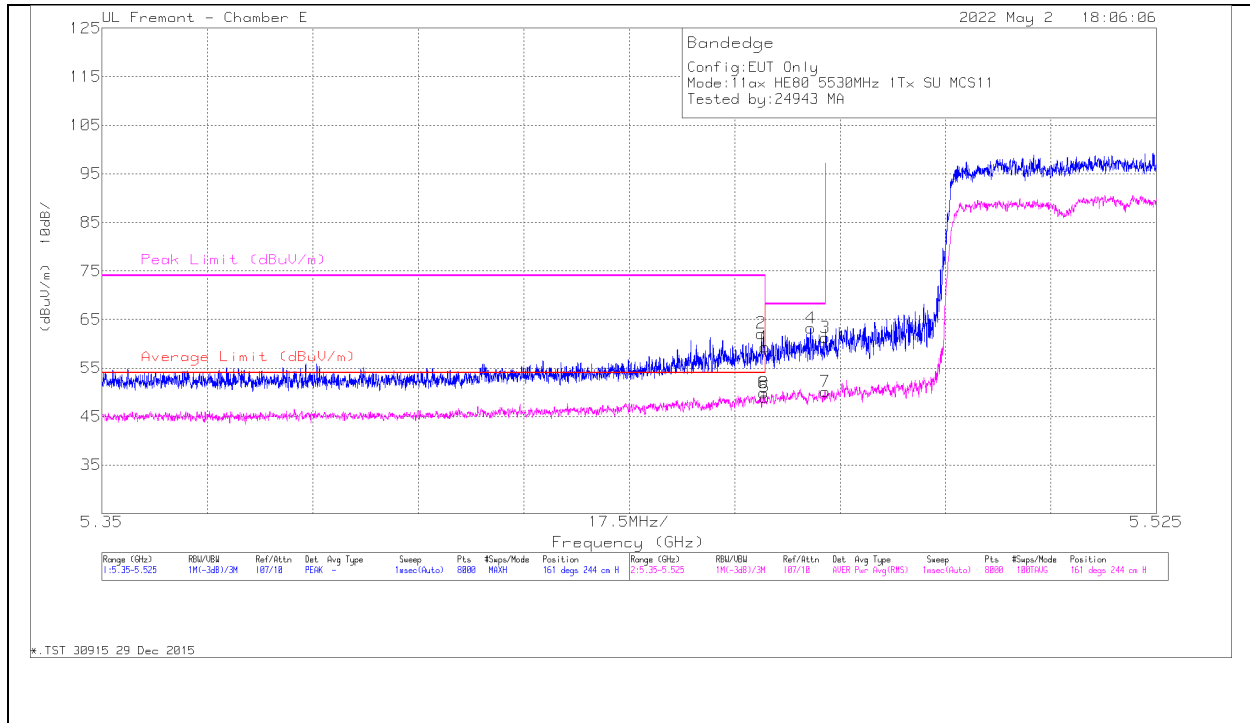


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	45.68	Pk	34.4	-20.7	0	59.38	-	-	74	-14.62	161	244	H
2	* 5.459434	48.43	Pk	34.4	-20.7	0	62.13	-	-	74	-11.87	161	244	H
5	* 5.46	34.21	RMS	34.4	-20.7	0.97	48.88	54	-5.12	-	-	161	244	H
6	* 5.459806	35.15	RMS	34.4	-20.7	0.97	49.82	54	-4.18	-	-	161	244	H
4	5.467616	49.54	Pk	34.4	-20.7	0	63.24	-	-	68.2	-4.96	161	244	H
3	5.47	47.54	Pk	34.4	-20.7	0	61.24	-	-	68.2	-6.96	161	244	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

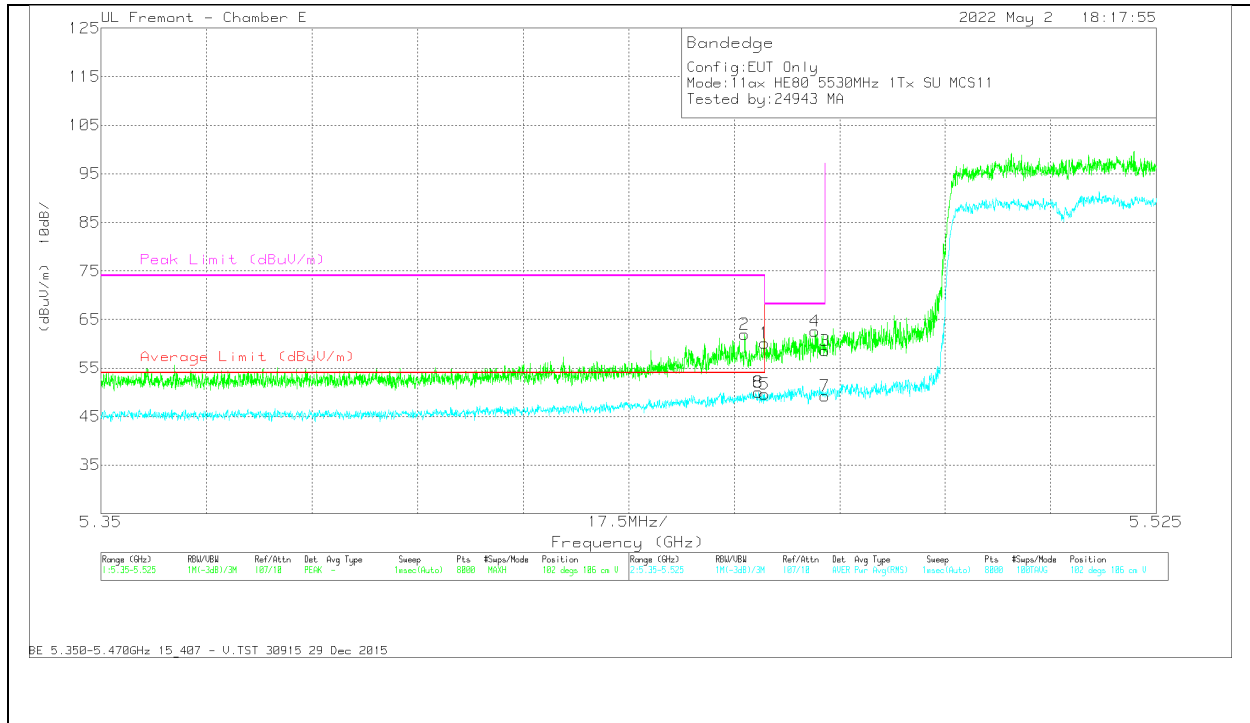

Marker	Frequency (GHz)	Motor Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	46.38	Pk	34.4	-20.7	0	60.08	-	-	74	-13.92	102	106	V
2	* 5.456721	48.18	Pk	34.4	-20.7	0	61.88	-	-	74	-12.12	102	106	V
5	* 5.46	34.83	RMS	34.4	-20.7	0.97	49.50	54	-4.50	-	-	102	106	V
6	* 5.458996	35.28	RMS	34.4	-20.7	0.97	49.95	54	-4.05	-	-	102	106	V
4	5.468404	48.88	Pk	34.4	-20.7	0	62.58	-	-	68.2	-5.62	102	106	V
3	5.47	44.86	Pk	34.4	-20.7	0	58.56	-	-	68.2	-9.64	102	106	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

2TX Antenna 6 + Antenna 5: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

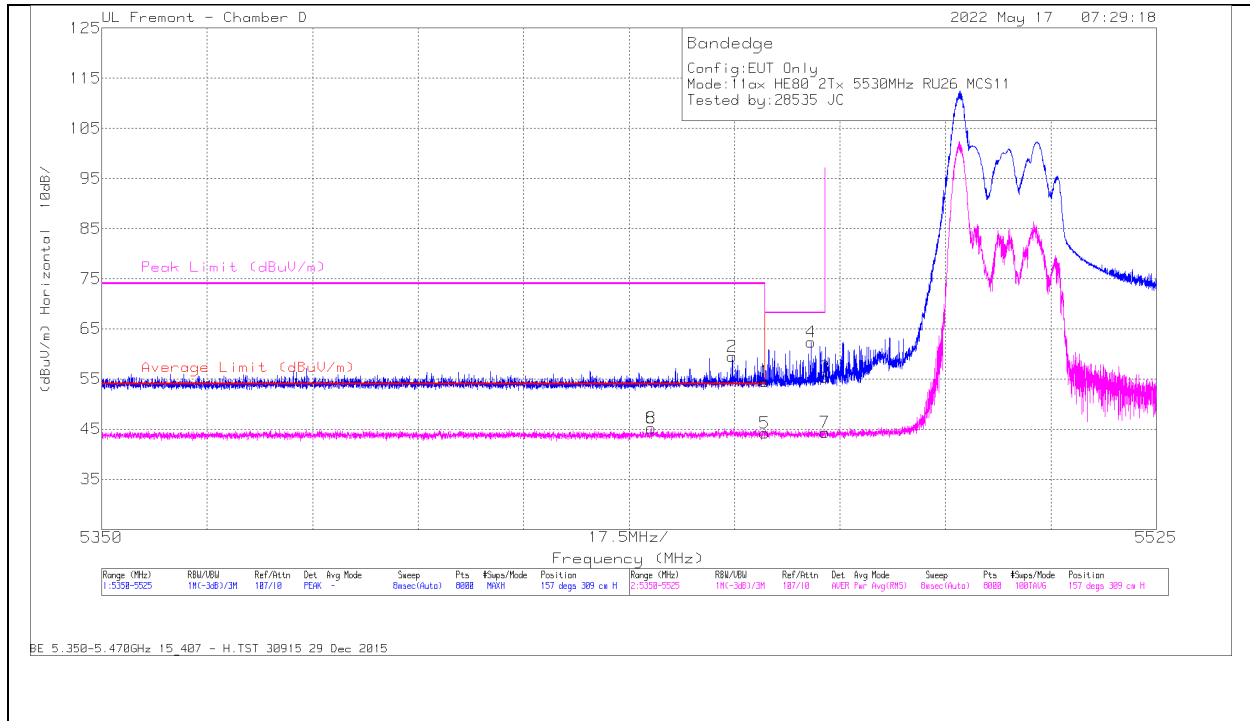


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200786 ACF (dB/m)	Amp/Cbtl/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	37.83	Pk	34.6	-18	0	54.43	-	-	74	-19.57	157	309	H
2	* 5454.642	43.04	Pk	34.6	-18.2	0	59.44	-	-	74	-14.56	157	309	H
5	* 5460	27.09	RMS	34.6	-18	.45	44.14	54	-9.86	-	-	157	309	H
6	* 5441.144	28.45	RMS	34.6	-18.3	.45	45.20	54	-8.80	-	-	157	309	H
4	5467.682	45.93	Pk	34.6	-18.2	0	62.33	-	-	68.2	-5.87	157	309	H
3	5470	38.89	Pk	34.6	-18.2	0	55.29	-	-	68.2	-12.91	157	309	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

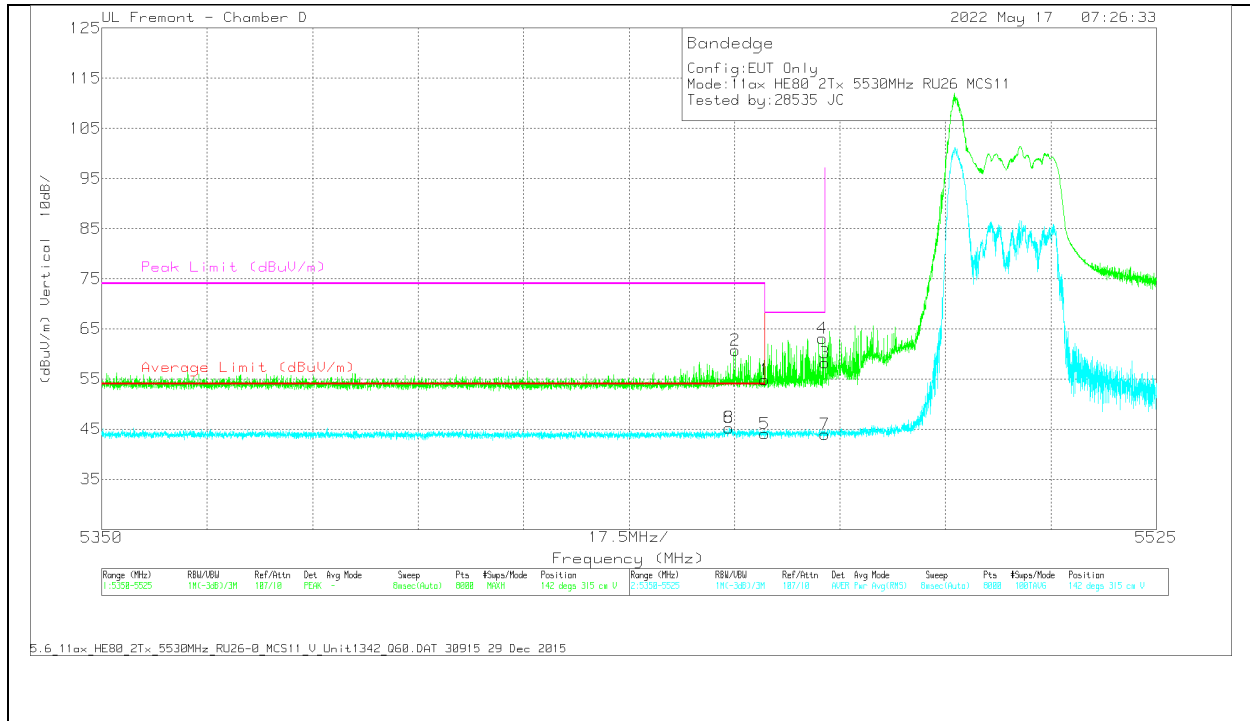


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200786 ACF (dB/m)	Amp/Cb/ Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	38.25	Pk	34.6	-18	0	54.85	-	-	74	-19.15	142	315	V
2	* 5455.146	44.32	Pk	34.6	-18.2	0	60.72	-	-	74	-13.28	142	315	V
5	* 5460	26.98	RMS	34.6	-18	.45	44.03	54	-9.97	-	-	142	315	V
6	* 5454.117	28.4	RMS	34.6	-18.2	.45	45.25	54	-8.75	-	-	142	315	V
4	5469.563	46.67	Pk	34.6	-18.2	0	63.07	-	-	68.2	-5.13	142	315	V
3	5470	41.87	Pk	34.6	-18.2	0	58.27	-	-	68.2	-9.93	142	315	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

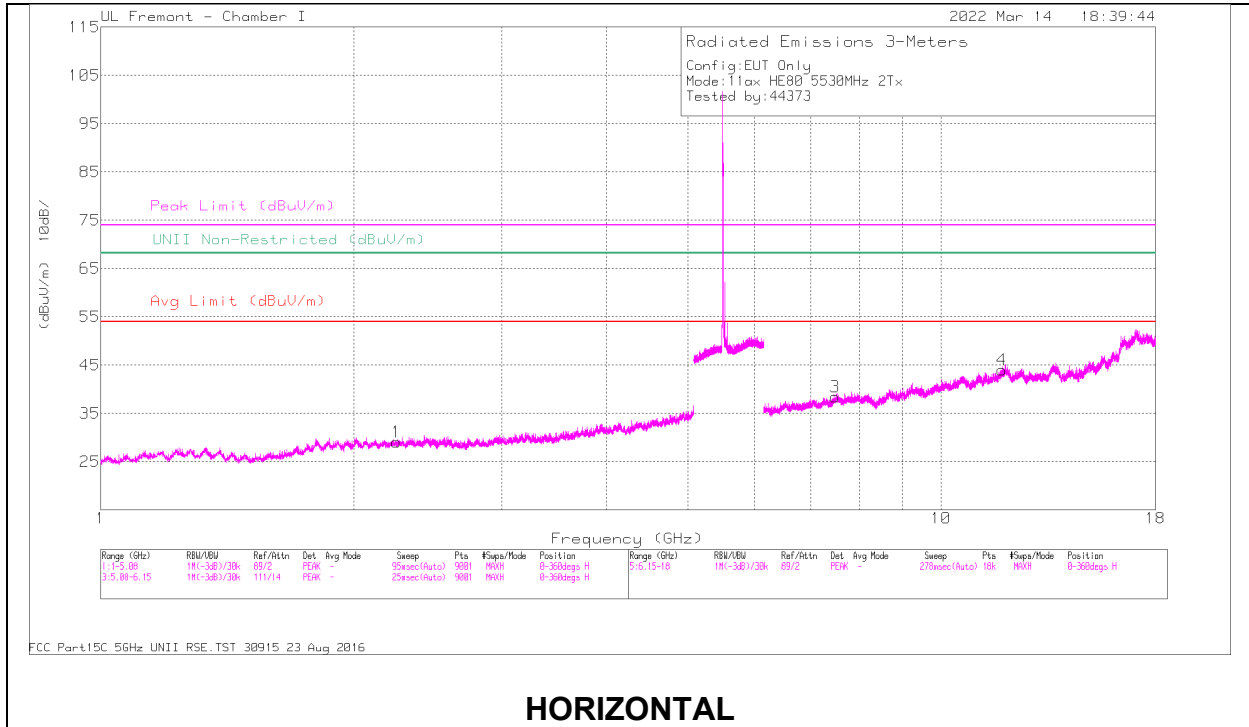

HORIZONTAL

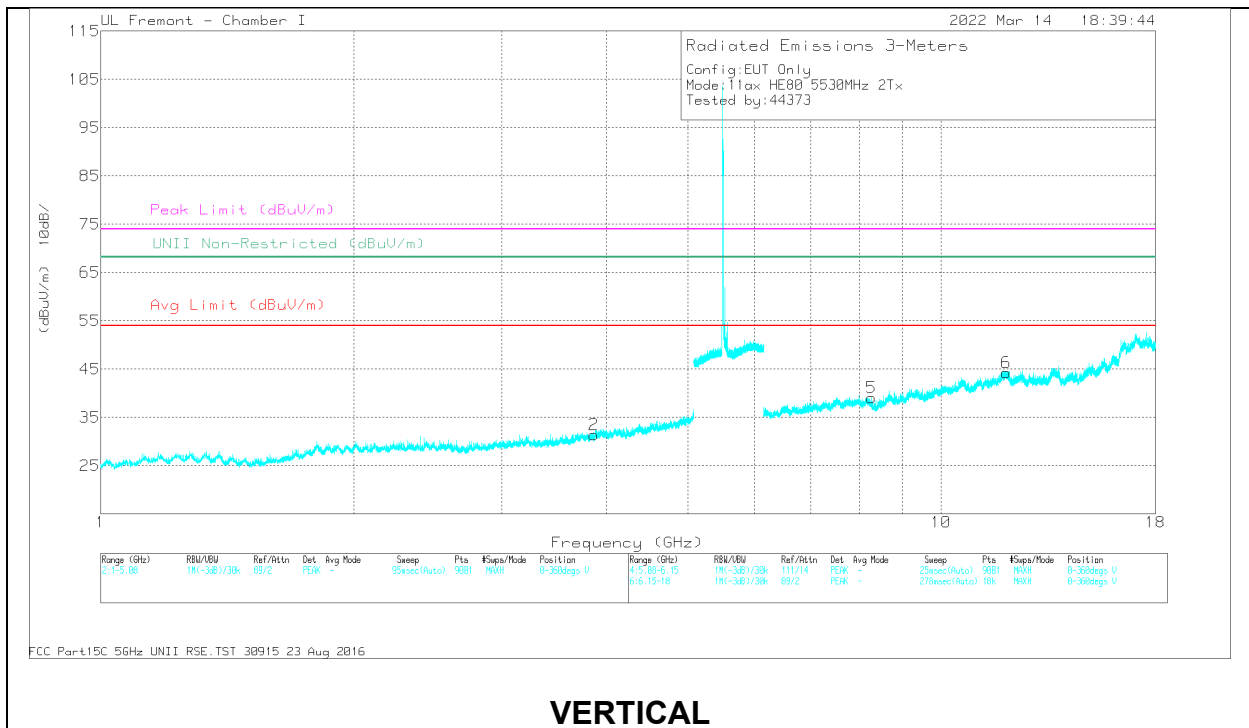

VERTICAL



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dBm)	Amp/CbI/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.248	37.67	PK-U	31.6	-29.9	39.37	-	-	74	-34.63	301	122	H
	* 2.2471	26.17	ADR	31.6	-29.9	27.87	54	-26.13	-	-	301	122	H
2	* 3.8598	35.69	PK-U	33.4	-27.4	41.69	-	-	74	-32.31	252	184	V
	* 3.8628	23.83	ADR	33.4	-27.4	29.83	54	-24.17	-	-	252	184	V
3	* 7.4867	32.55	PK-U	35.7	-19.1	49.15	-	-	74	-24.85	197	138	H
	* 7.4868	20.36	ADR	35.7	-19.1	36.96	54	-17.04	-	-	197	138	H
4	* 11.8185	31.81	PK-U	38.5	-16.4	53.91	-	-	74	-20.09	284	106	H
	* 11.8201	20.06	ADR	38.5	-16.3	42.26	54	-11.74	-	-	284	106	H
5	* 8.2602	31.69	PK-U	35.6	-18.7	48.59	-	-	74	-25.41	43	299	V
	* 8.2623	19.88	ADR	35.6	-18.7	36.78	54	-17.22	-	-	43	299	V
6	* 11.9486	32.15	PK-U	38.5	-16.1	54.55	-	-	74	-19.45	168	141	V
	* 11.9497	20.23	ADR	38.5	-16.1	42.63	54	-11.37	-	-	168	141	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

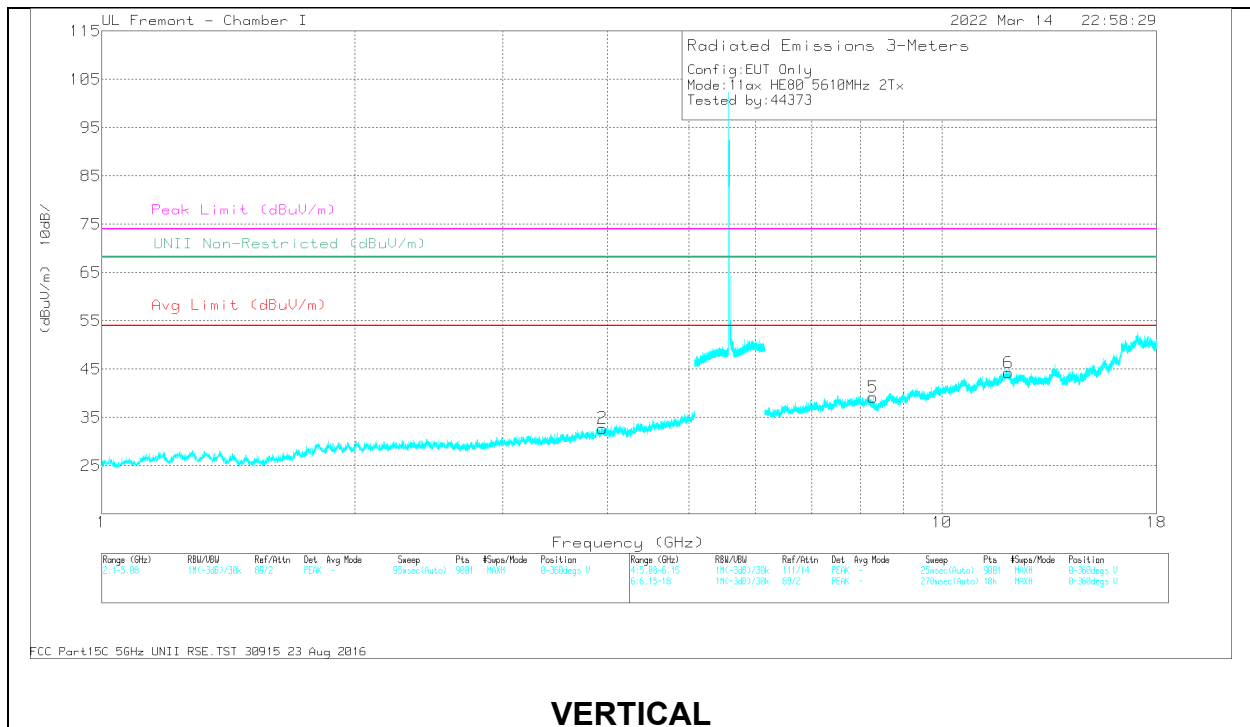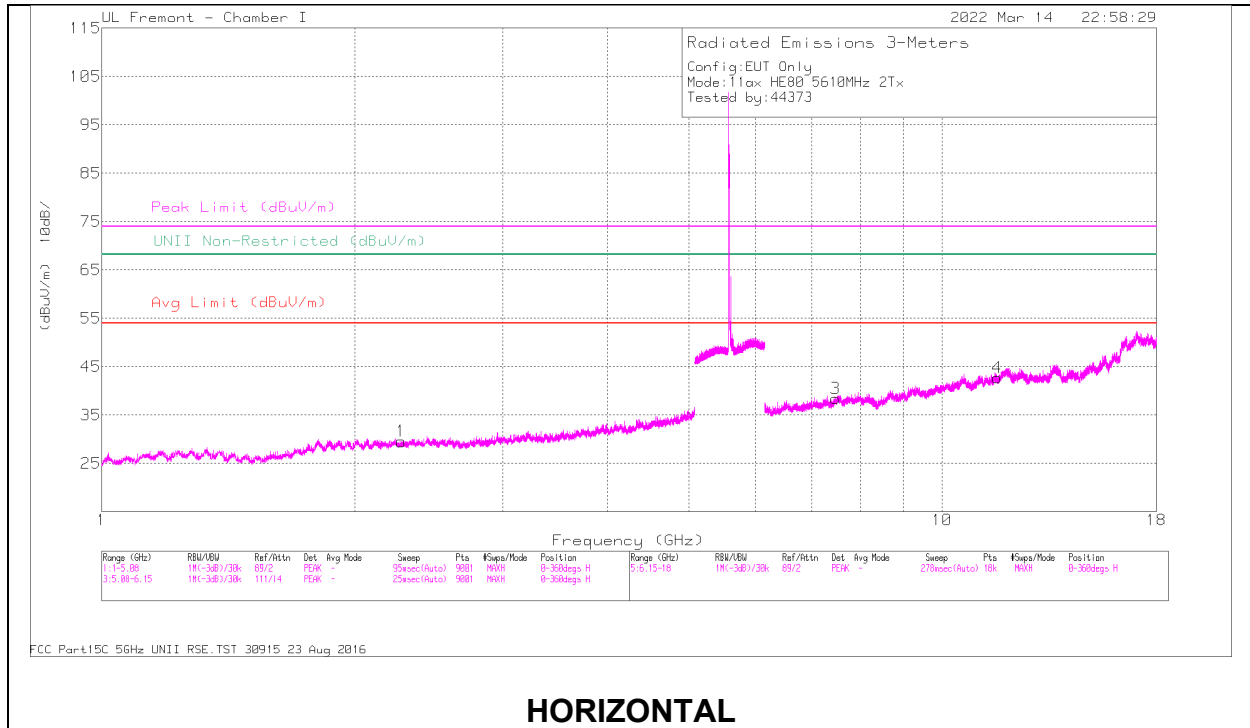


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dBm)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.2745	38.14	PK-U	31.6	-29.8	39.94	-	-	74	-34.06	146	116	H
	* 2.272	26.45	ADR	31.6	-29.8	28.25	54	-25.75	-	-	146	116	H
2	* 3.9427	36	PK-U	33.5	-26.7	42.8	-	-	74	-31.2	218	142	V
	* 3.9405	24.58	ADR	33.5	-26.7	31.38	54	-22.62	-	-	218	142	V
3	* 7.4771	32.08	PK-U	35.7	-19.2	48.58	-	-	74	-25.42	97	187	H
	* 7.4768	20.57	ADR	35.7	-19.2	37.07	54	-16.93	-	-	97	187	H
4	* 11.6359	31.07	PK-U	38.3	-16.7	52.67	-	-	74	-21.33	51	105	H
	* 11.6366	19.72	ADR	38.3	-16.7	41.32	54	-12.68	-	-	51	105	H
5	* 8.2762	31.73	PK-U	35.6	-18.9	48.43	-	-	74	-25.57	66	190	V
	* 8.2757	19.96	ADR	35.6	-18.9	36.66	54	-17.34	-	-	66	190	V
6	* 11.9920	31.92	PK-U	38.5	-16.1	54.32	-	-	74	-19.68	193	214	V
	* 11.9934	20.2	ADR	38.5	-16.1	42.6	54	-11.4	-	-	193	214	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 138 RESULTS

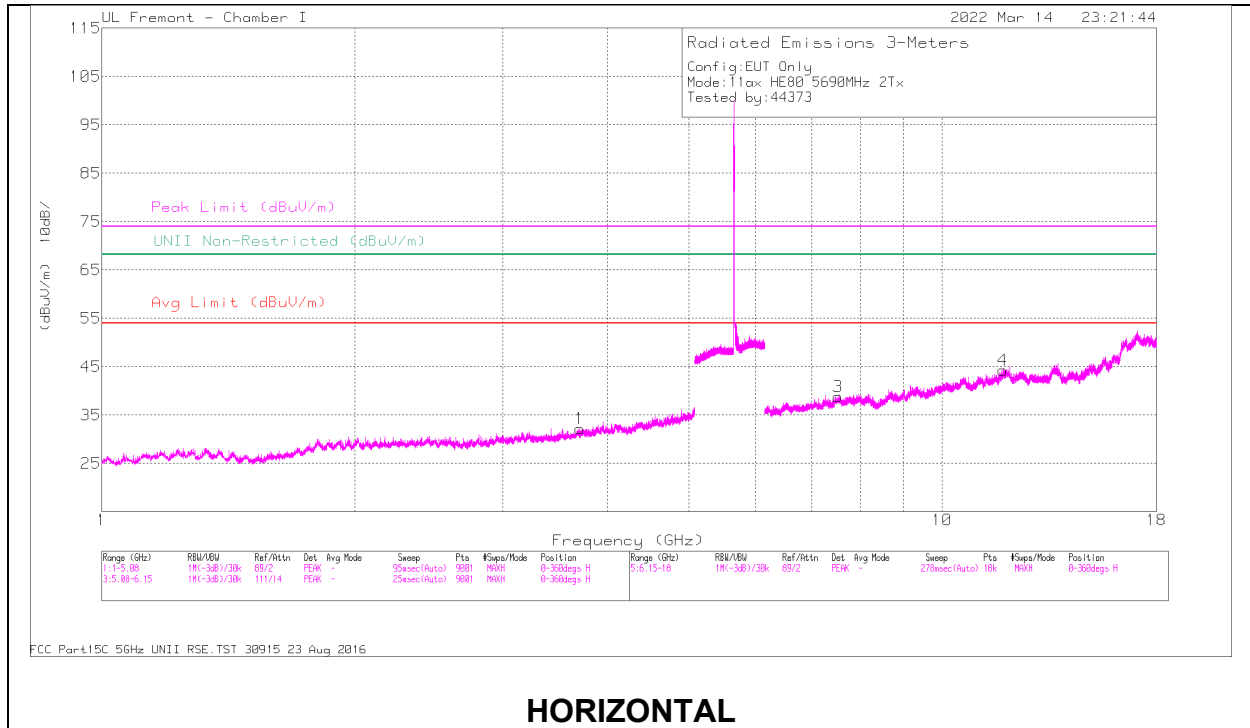

HORIZONTAL

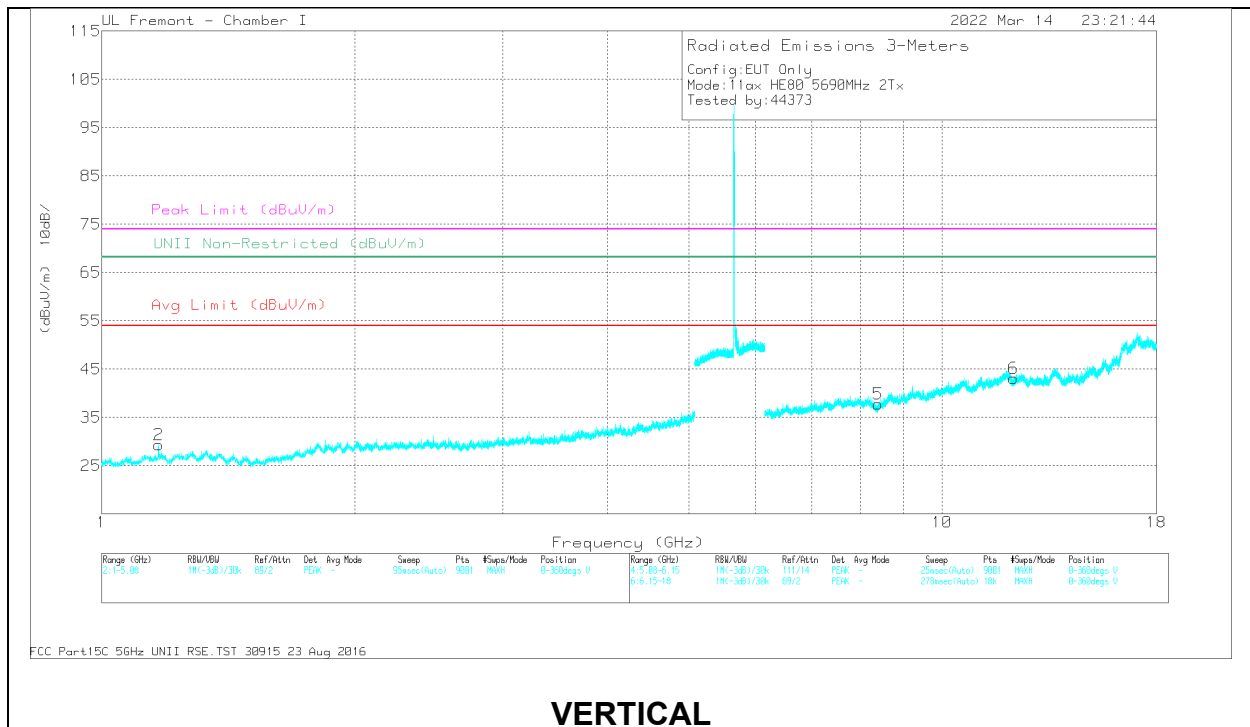

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.705873	35.23	PK-U	33.1	-27.1	41.23	-	-	74	-32.77	106	127	H
	* 3.708503	24.01	ADR	33.1	-27.2	29.91	54	-24.09	-	-	106	127	H
2	* 1.168618	40.95	PK-U	28.4	-31.9	37.45	-	-	74	-36.55	54	159	V
	* 1.168694	28.68	ADR	28.4	-31.9	25.18	54	-28.82	-	-	54	159	V
3	* 7.526782	31.82	PK-U	35.7	-18.7	48.82	-	-	74	-25.18	48	213	H
	* 7.527557	20.12	ADR	35.7	-18.8	37.02	54	-16.98	-	-	48	213	H
4	* 11.824052	31.12	PK-U	38.5	-16.3	53.32	-	-	74	-20.68	159	164	H
	* 11.827774	19.81	ADR	38.5	-16.2	42.11	54	-11.89	-	-	159	164	H
5	* 8.394746	30.32	PK-U	35.6	-18.7	47.22	-	-	74	-26.78	281	196	V
	* 8.394923	18.67	ADR	35.6	-18.7	35.57	54	-18.43	-	-	281	196	V
6	* 12.166682	31.13	PK-U	38.5	-16.7	52.93	-	-	74	-21.07	310	121	V
	* 12.168533	19.43	ADR	38.5	-16.7	41.23	54	-12.77	-	-	310	121	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 6 + Antenna 5: SU, Single User

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

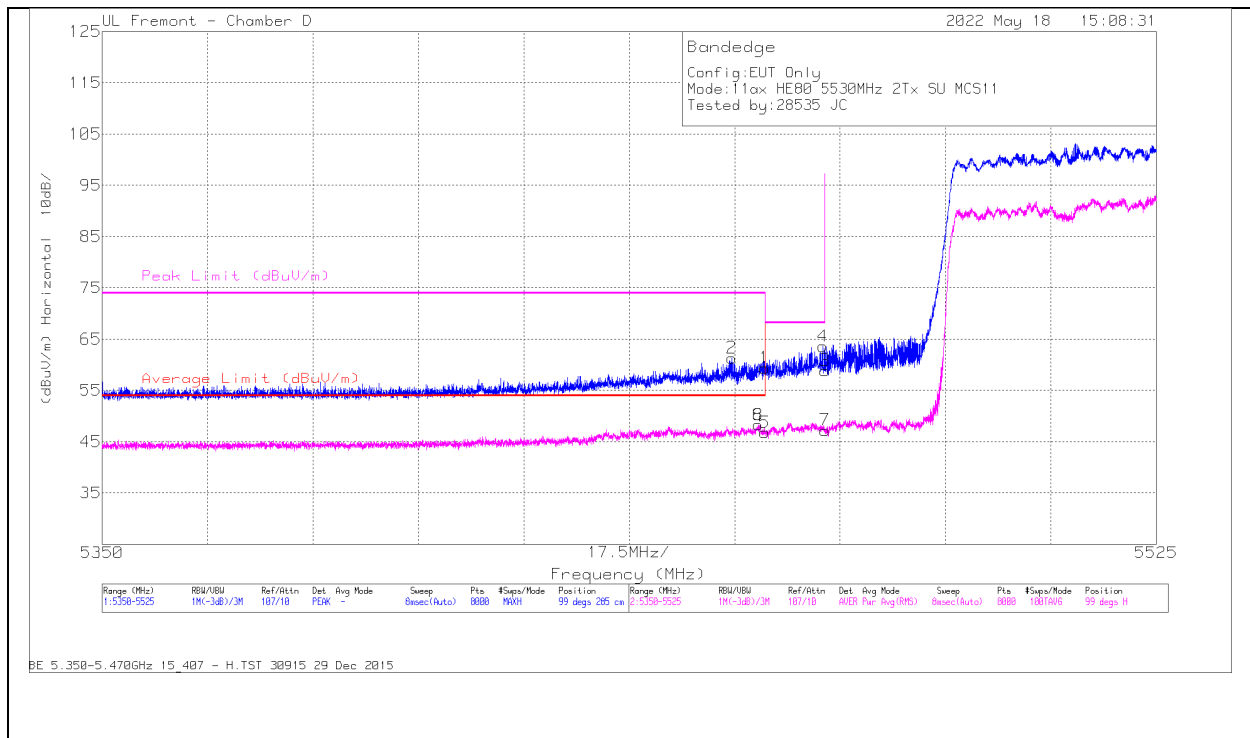


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200786 ACF (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	42.79	Pk	34.6	-18	0	59.39	-	-	74	-14.61	99	285	H
2	* 5454.533	44.92	PK	34.6	-18.2	0	61.32	-	-	74	-12.68	99	285	H
5	* 5460	29.38	RMS	34.6	-18	.97	46.95	54	-7.05	-	-	99	285	H
6	* 5458.887	30.83	RMS	34.6	-18	.97	48.40	54	-5.60	-	-	99	285	H
4	5469.651	47.19	Pk	34.6	-18.2	0	63.59	-	-	68.2	-4.61	99	285	H
3	5470	42.46	Pk	34.6	-18.2	0	58.86	-	-	68.2	-9.34	99	285	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

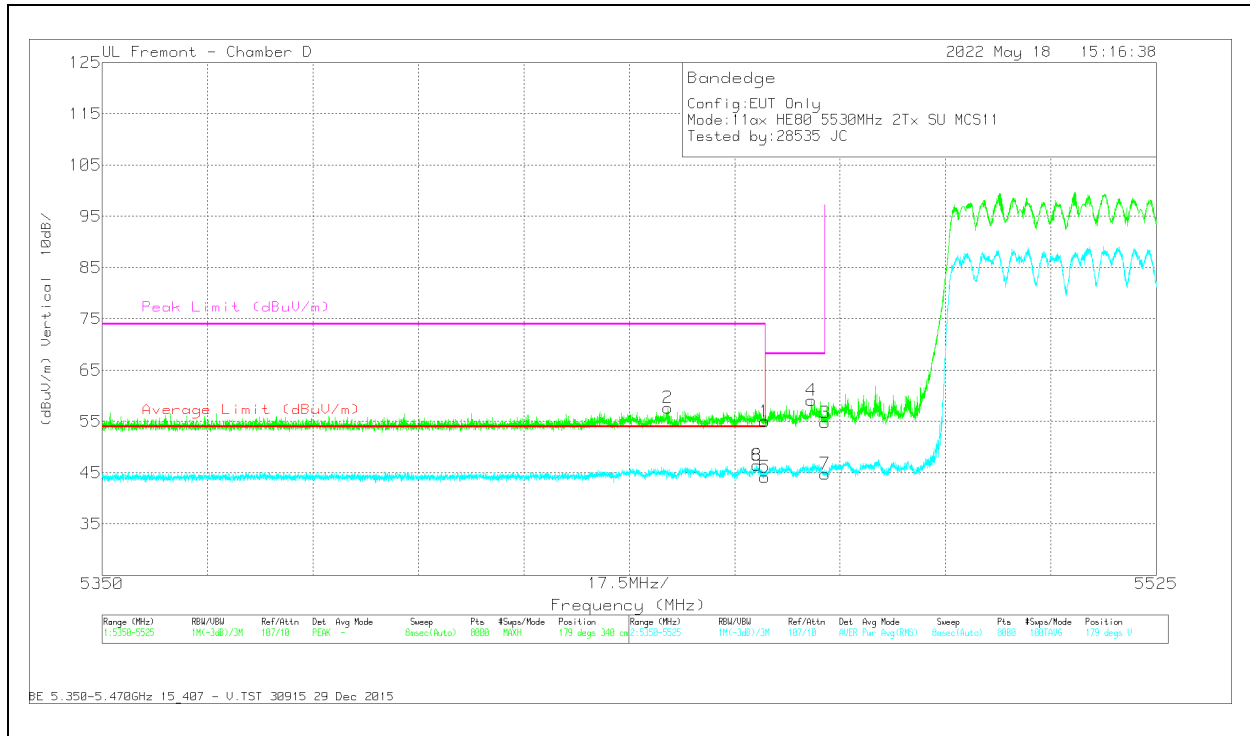


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200786 ACF (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	38.42	Pk	34.6	-18	0	55.02	-	-	74	-18.98	179	340	V
2	* 5443.922	41.27	Pk	34.6	-18.2	0	57.67	-	-	74	-16.33	179	340	V
5	* 5460	26.72	RMS	34.6	-18	.97	44.29	54	-9.71	-	-	179	340	V
6	* 5458.712	29.12	RMS	34.6	-18.1	.97	46.59	54	-7.41	-	-	179	340	V
4	5467.726	42.71	Pk	34.6	-18.2	0	59.11	-	-	68.2	-9.09	179	340	V
3	5470	38.37	Pk	34.6	-18.2	0	54.77	-	-	68.2	-13.43	179	340	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

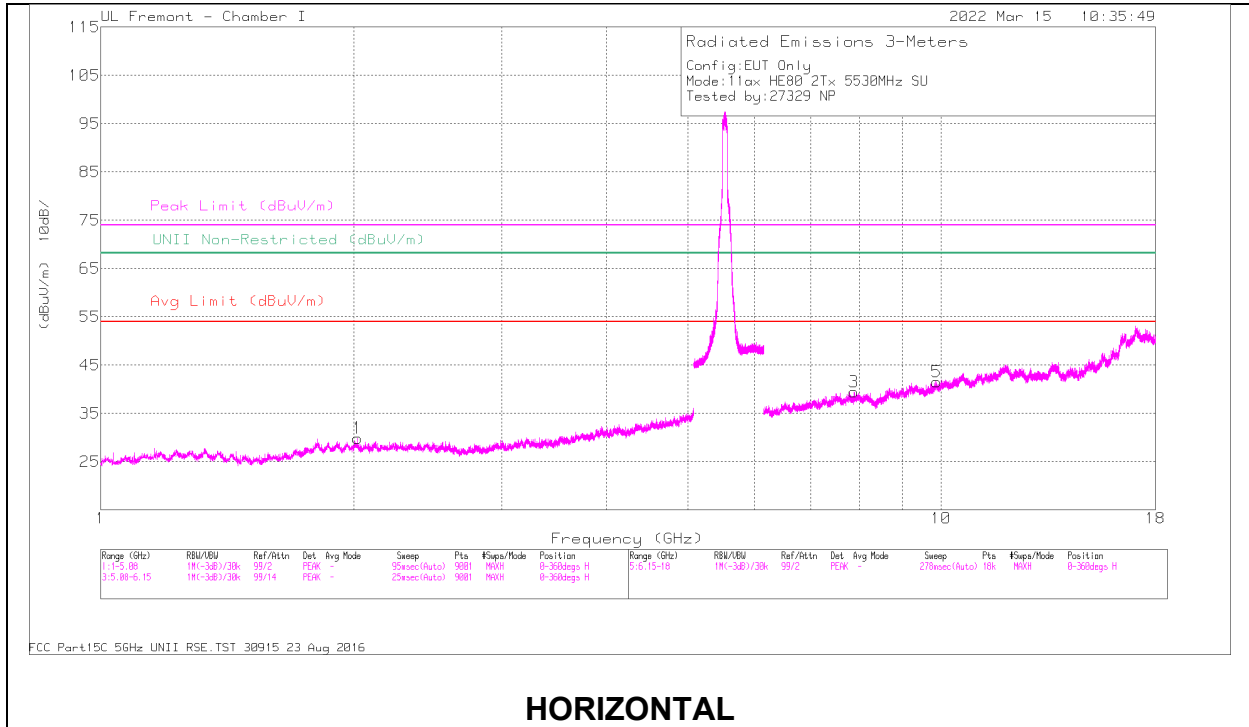

HORIZONTAL

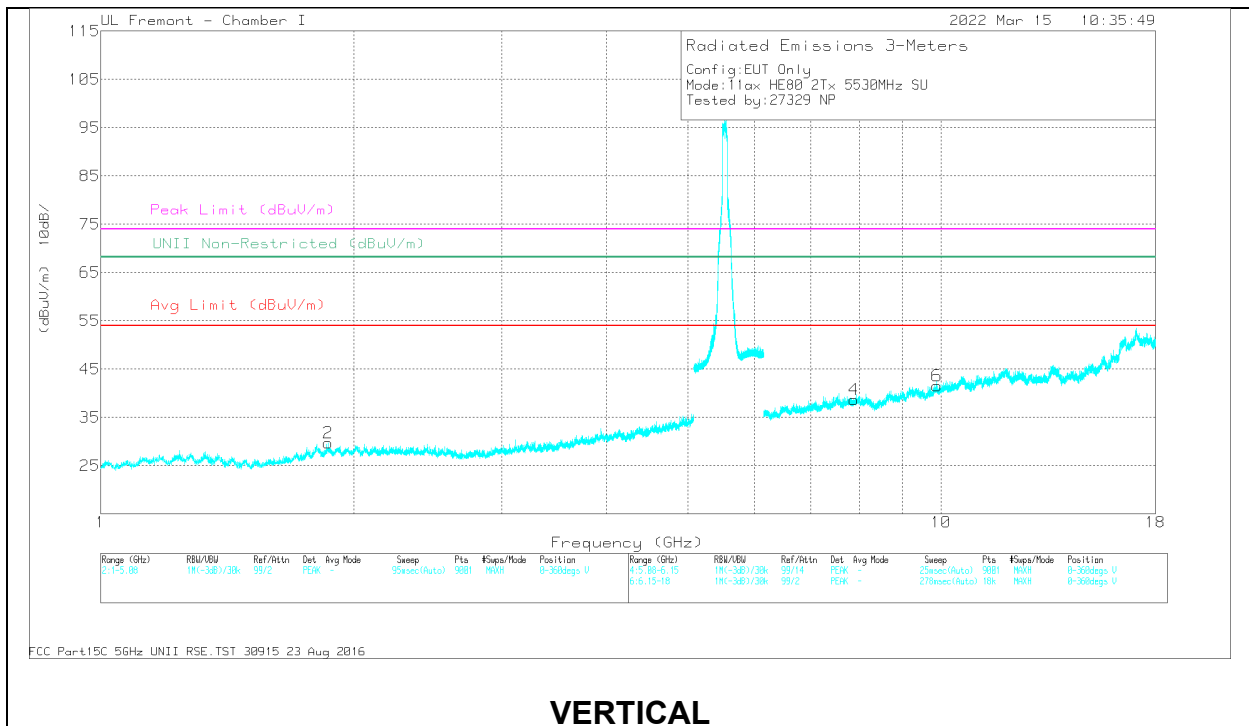

VERTICAL


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.0232	37.55	PK-U	31.2	-30.2	38.55	68.2	-29.65	259	257	H
2	1.8627	38.19	PK-U	30.8	-30.5	38.49	68.2	-29.71	10	278	V
3	7.8707	31.95	PK-U	35.7	-19.4	48.25	68.2	-19.95	27	318	H
5	9.8911	31.09	PK-U	36.8	-17	50.89	68.2	-17.31	252	286	H
4	7.8829	31.83	PK-U	35.7	-19.3	48.23	68.2	-19.97	268	115	V
6	9.8942	31.14	PK-U	36.8	-17.1	50.84	68.2	-17.36	0	332	V


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

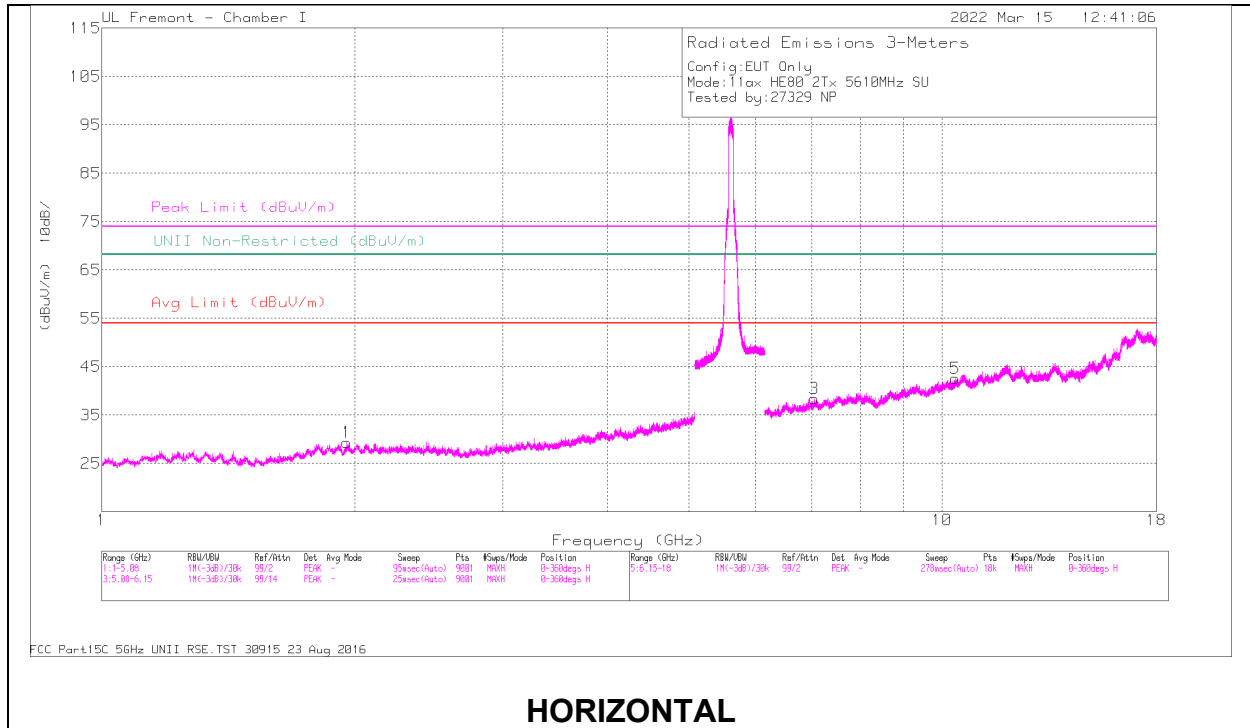

HORIZONTAL

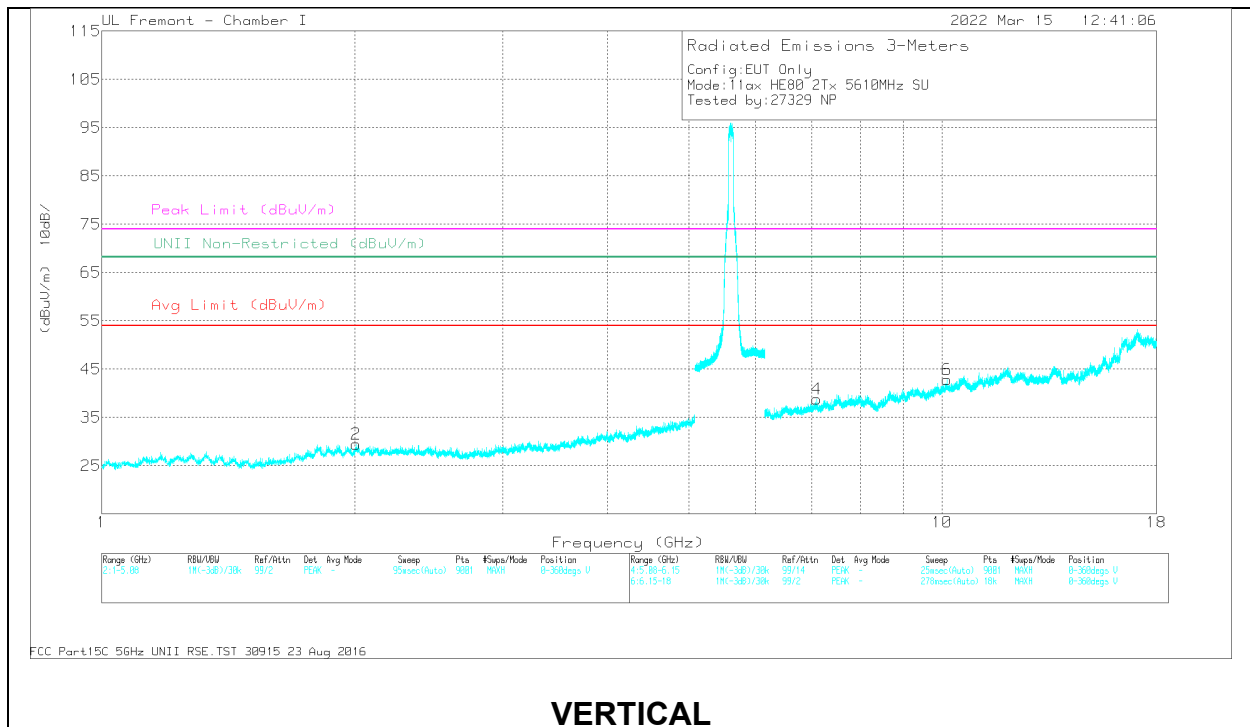

VERTICAL


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbi/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.9590	38.13	PK-U	31	-30.4	38.73	68.2	-29.47	226	138	H
2	2.0071	36.77	PK-U	31.2	-30.2	37.77	68.2	-30.43	265	258	V
3	7.0469	31.79	PK-U	35.5	-19.5	47.79	68.2	-20.41	247	186	H
5	10.3737	31.79	PK-U	37	-16.2	52.59	68.2	-15.61	136	195	H
4	7.0889	32.43	PK-U	35.5	-19.9	48.03	68.2	-20.17	171	216	V
6	10.1373	30.77	PK-U	36.9	-16.3	51.37	68.2	-16.83	133	126	V


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 RESULTS

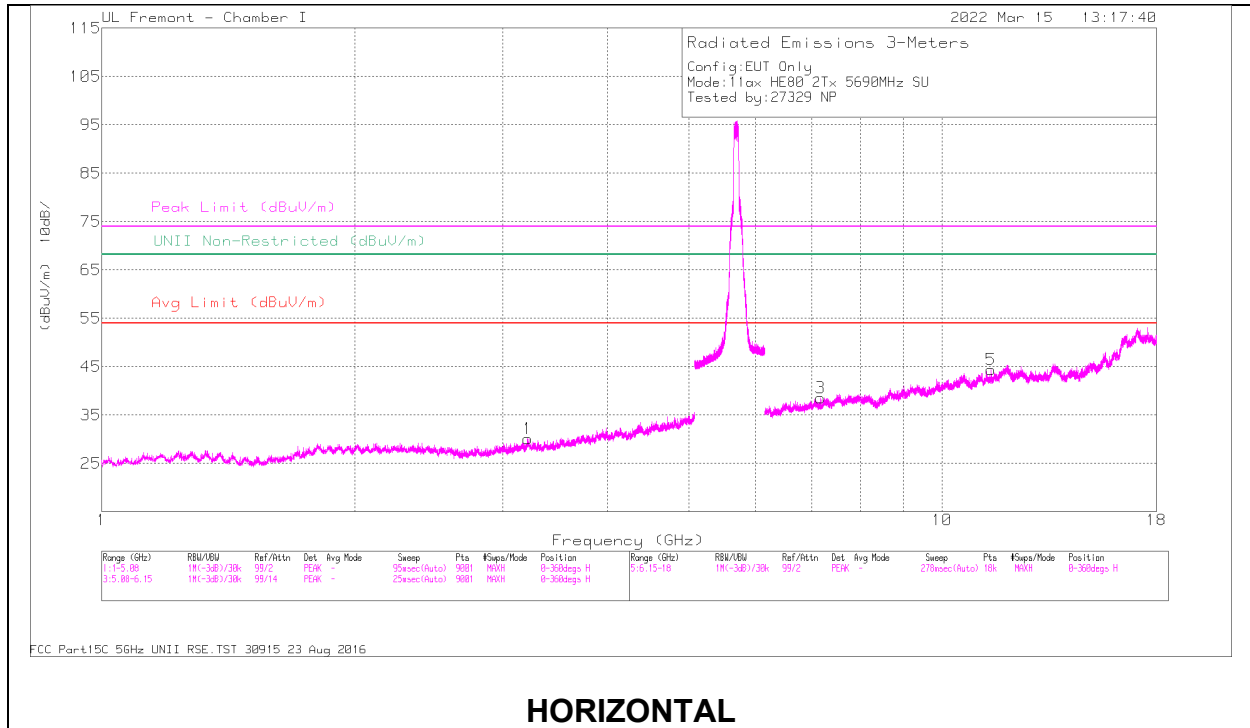

HORIZONTAL

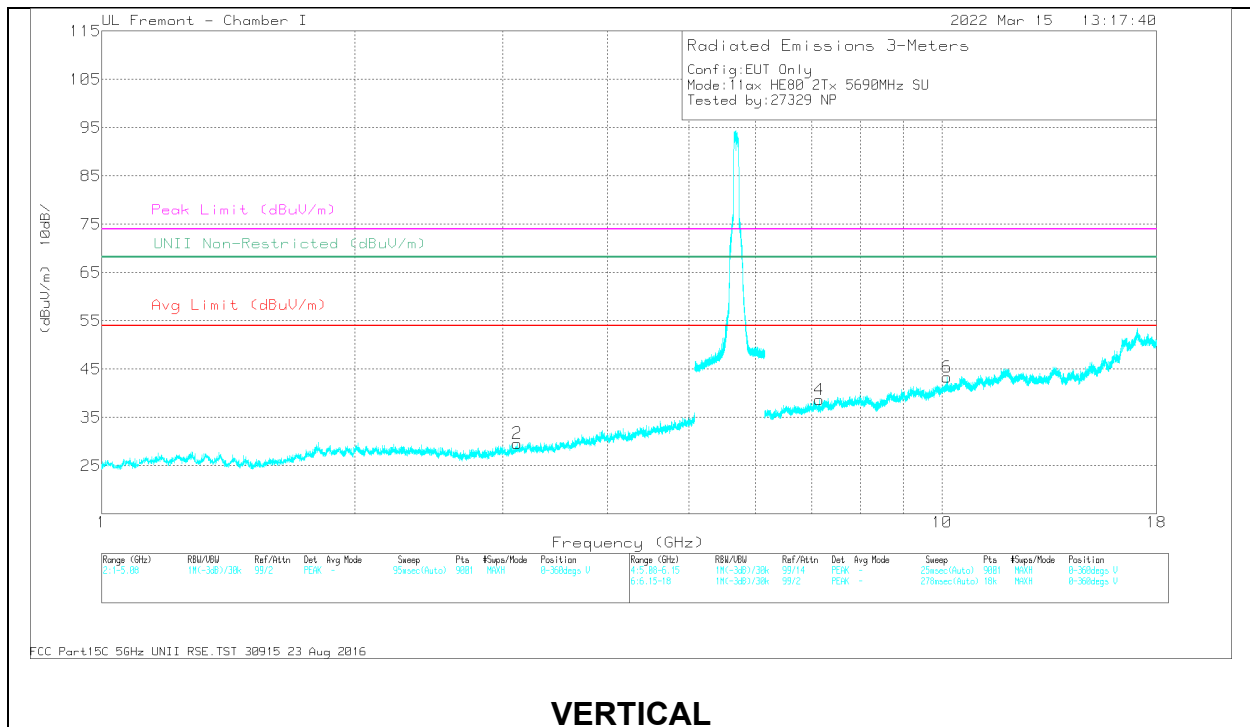

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb/IF In/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.2148	35.26	PK-U	32.8	-27.6	0	40.46	-	-	-	-	68.2	-27.74	210	313	H
2	3.1232	34.8	PK-U	32.8	-28.5	0	39.1	-	-	-	-	68.2	-29.1	103	310	V
3	7.1753	32.31	PK-U	35.5	-20.5	0	47.31	-	-	-	-	68.2	-20.89	83	117	H
5	* 11.4484	30.26	PK-U	38.1	-16	0	52.36	-	-	74	-21.64	-	-	214	247	H
6	* 11.4467	18.93	ADR	38.1	-16	.23	41.26	54	-12.74	-	-	-	-	214	247	H
4	7.1378	31.51	PK-U	35.5	-20.3	0	46.71	-	-	-	-	68.2	-21.49	298	315	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.2.19. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX Antenna 6

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

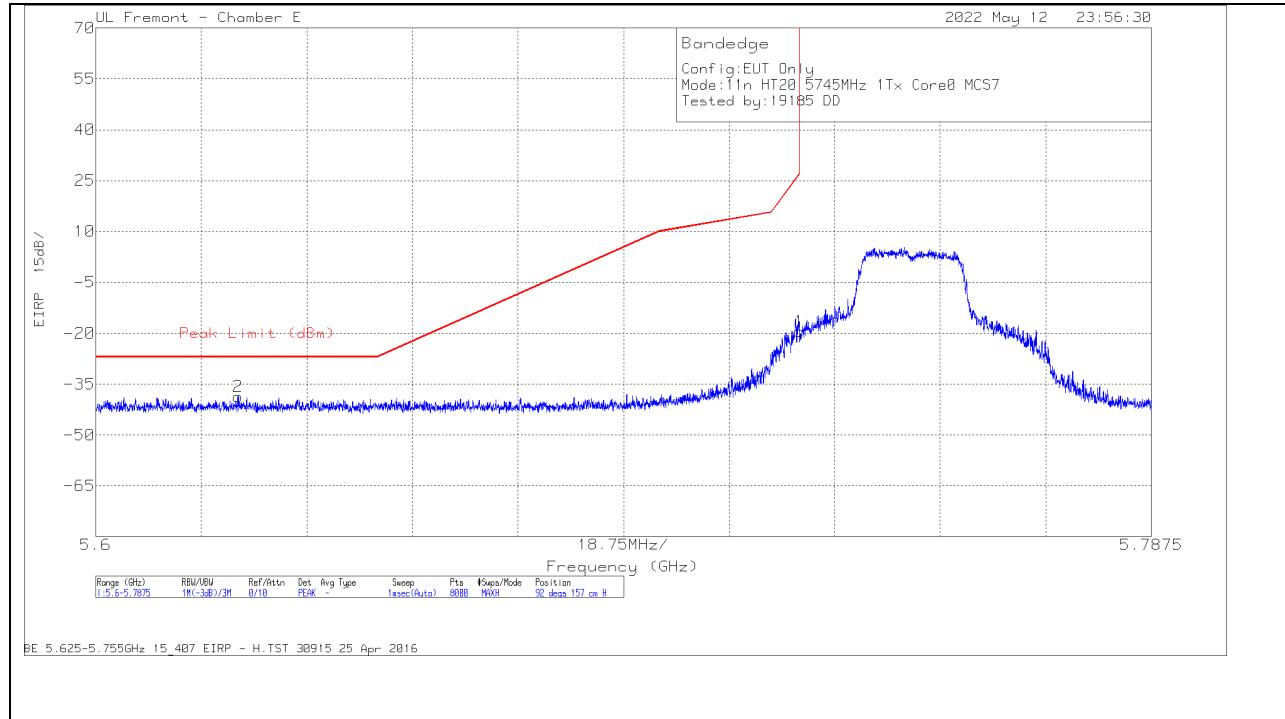

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/C bl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.625245	-64.23	Pk	34.5	-20.7	11.8	0	-38.63	-27	-11.63	92	157	H
1	5.725	-45.63	Pk	34.7	-20.3	11.8	0	-19.43	27	-46.43	92	157	H

Pk - Peak detector

VERTICAL RESULT

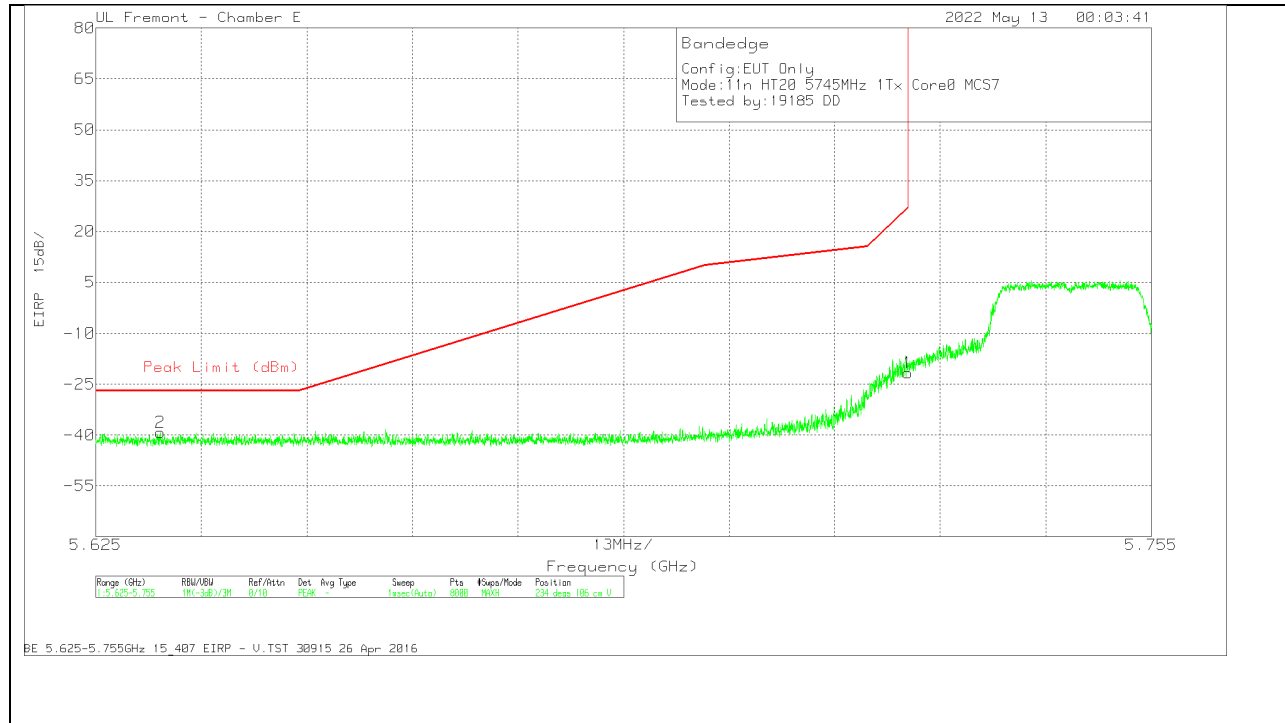


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/C bl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP(dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.632947	-64.83	Pk	34.5	-20.7	11.8	0	-39.23	-27	-12.23	234	106	V
1	5.725	-47.82	Pk	34.7	-20.3	11.8	0	-21.62	27	-48.62	234	106	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

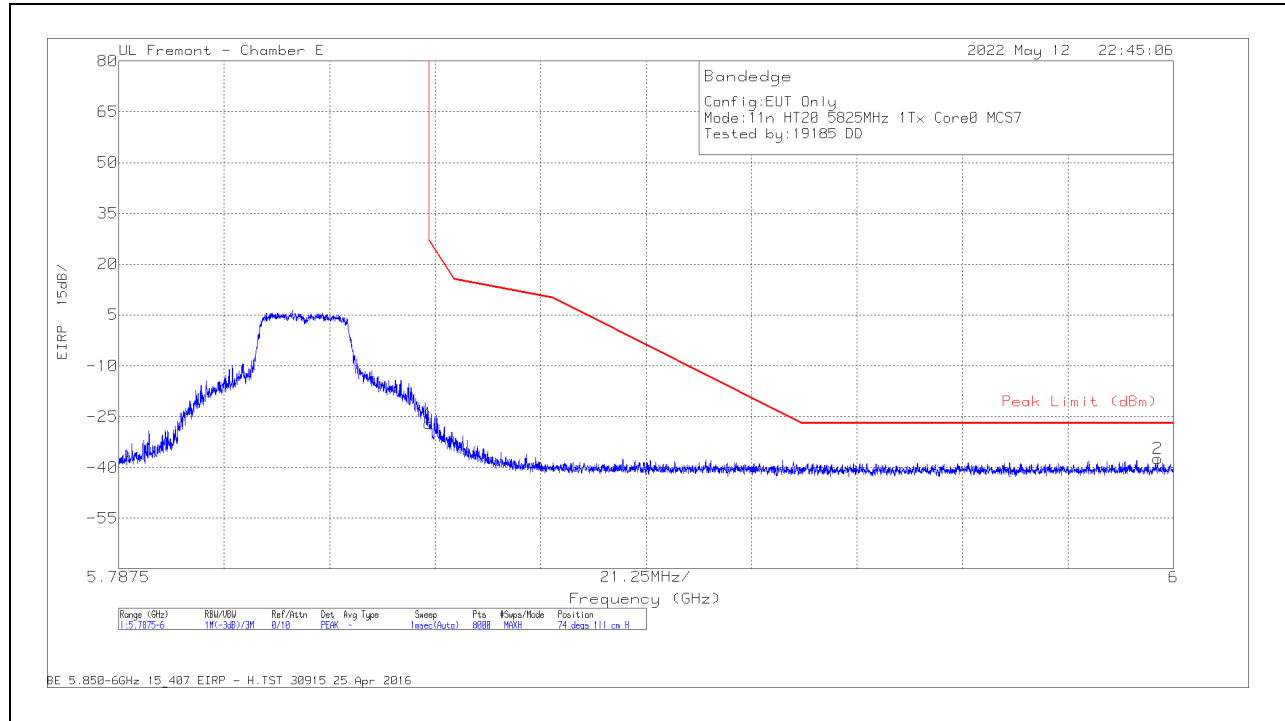

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP(dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-54.16	Pk	35	-19.7	11.8	0	-27.06	27	-54.06	74	111	H
2	5.99684	-64.82	Pk	35.3	-19.6	11.8	0	-37.32	-27	-10.32	74	111	H

Pk - Peak detector

VERTICAL RESULT

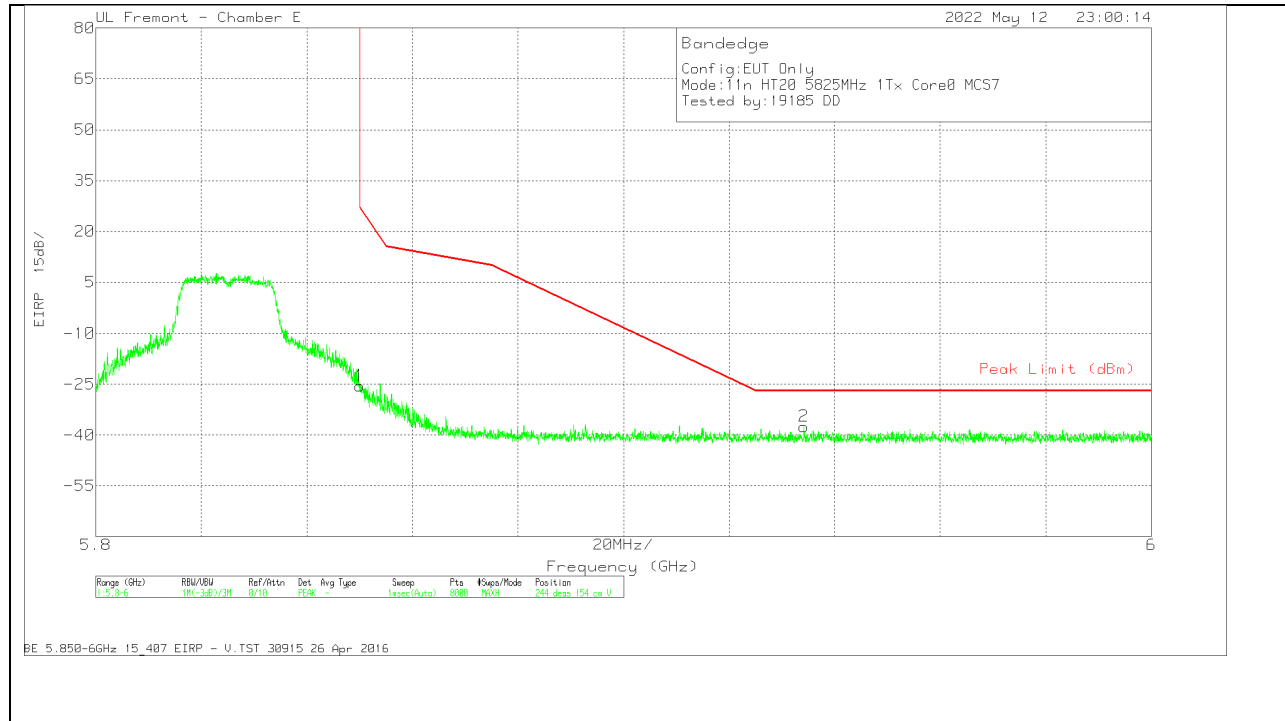


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/C b/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected EIRP(dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.55	Pk	35	-19.7	11.8	0	-25.45	27	-52.45	244	154	V
2	5.934166	-64.36	Pk	35.1	-20	11.8	0	-37.46	-27	-10.46	244	154	V

Pk - Peak detector

1TX Antenna 5

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

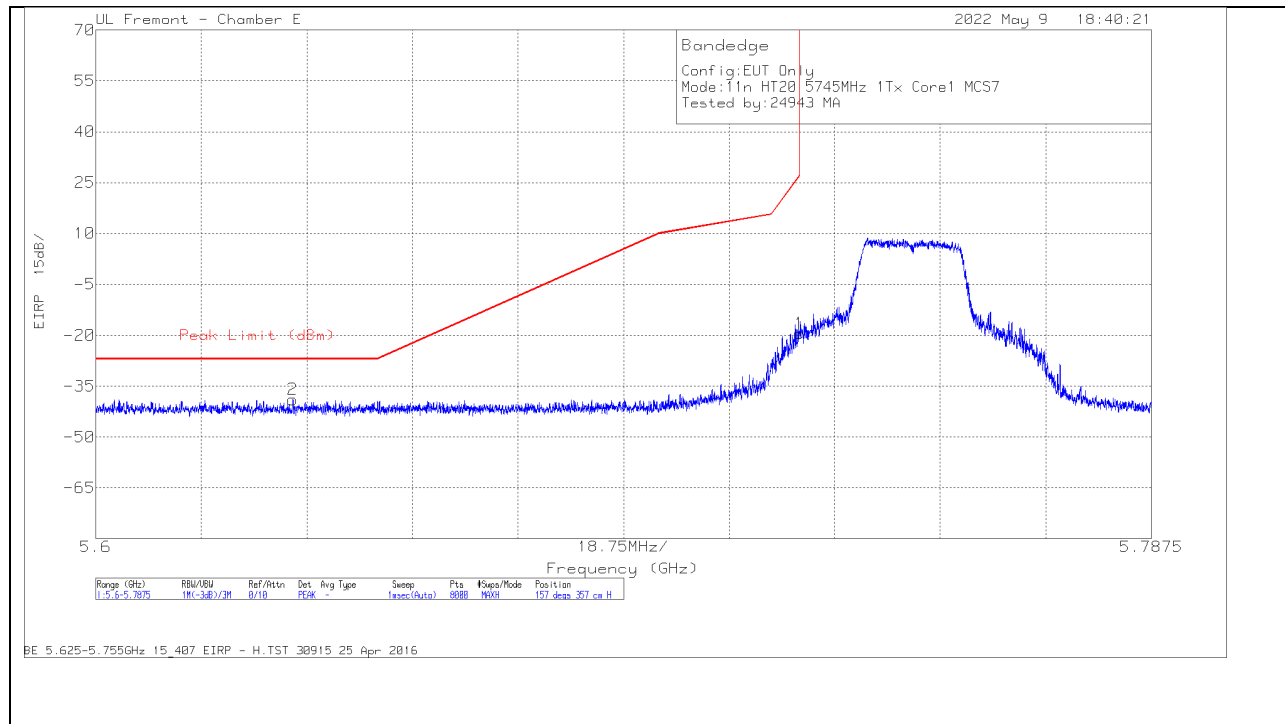

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.635019	-64.55	Pk	34.5	-20.7	11.8	0	-38.95	-27	-11.95	157	357	H
1	5.725	-45.61	Pk	34.7	-20.3	11.8	0	-19.41	27	-46.41	157	357	H

Pk - Peak detector

VERTICAL RESULT

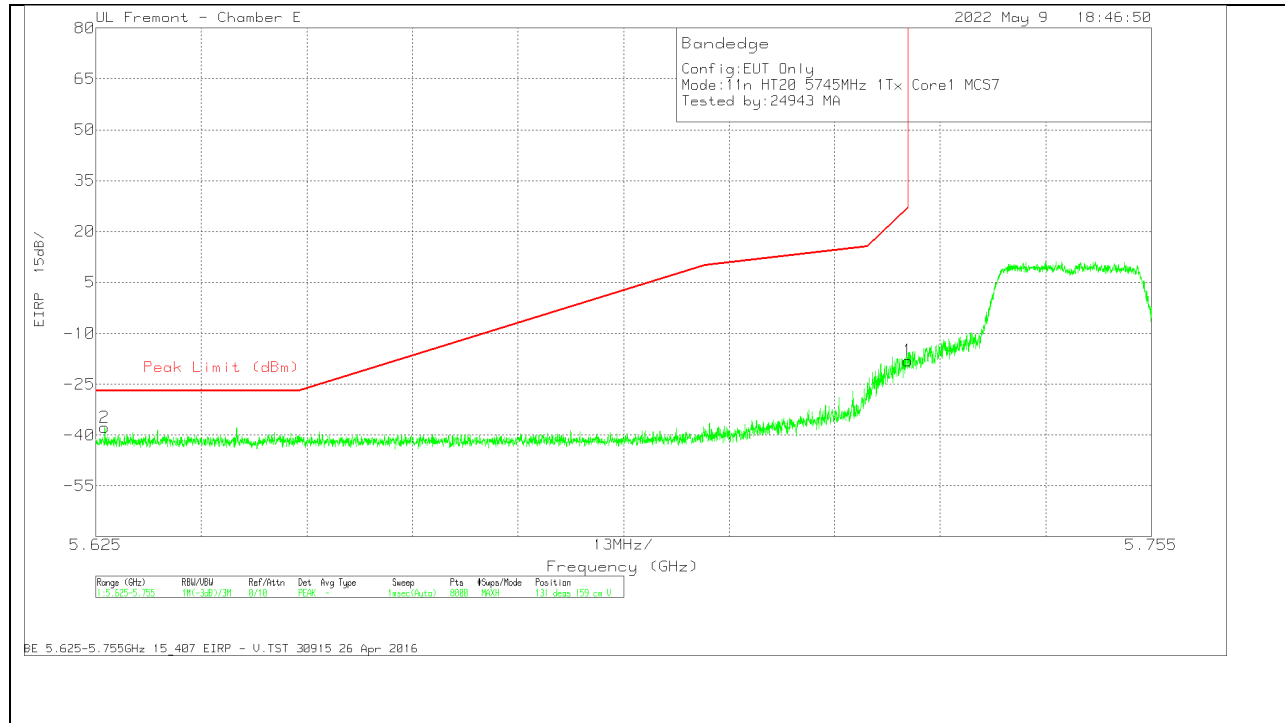


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.626105	-63.37	Pk	34.5	-20.7	11.8	0	-37.77	-27	-10.77	131	159	V
1	5.725	-44.25	Pk	34.7	-20.3	11.8	0	-18.05	27	-45.05	131	159	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

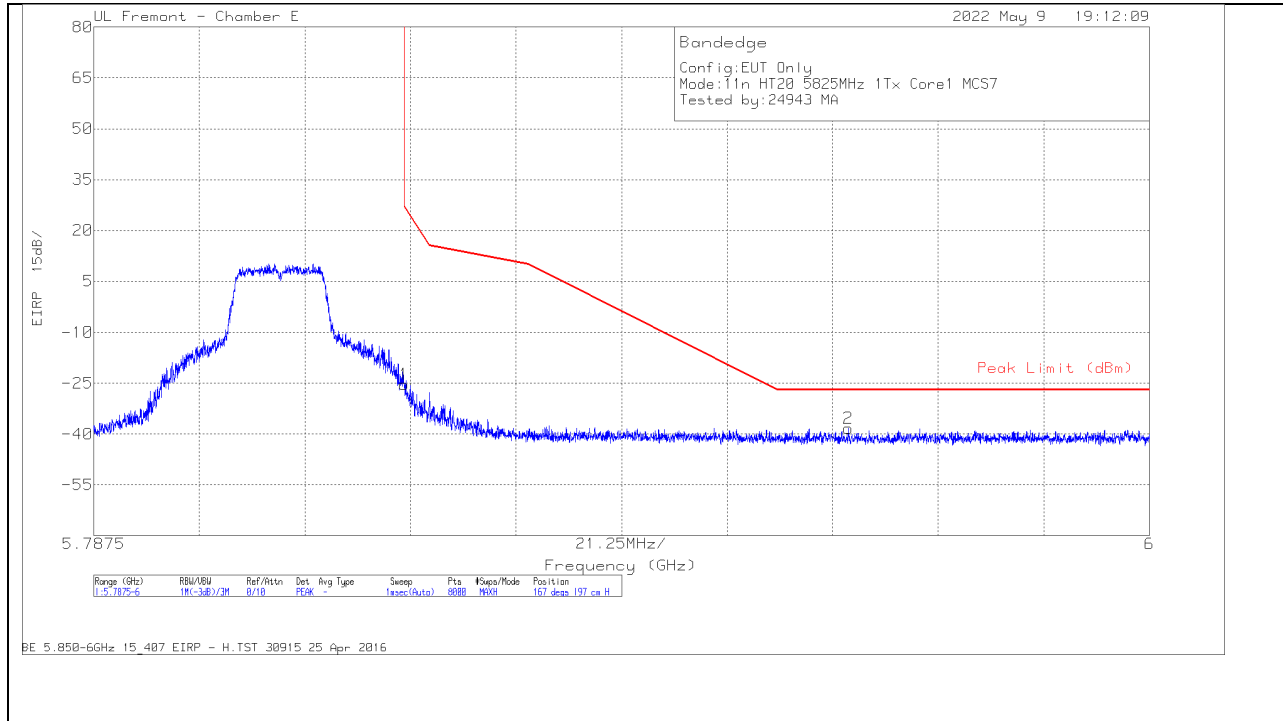

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cbl/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.39	Pk	35	-19.7	11.8	0	-25.29	27	-52.29	167	197	H
2	5.939378	-65.2	Pk	35.1	-20	11.8	0	-38.3	-27	-11.3	167	197	H

Pk - Peak detector

VERTICAL RESULT

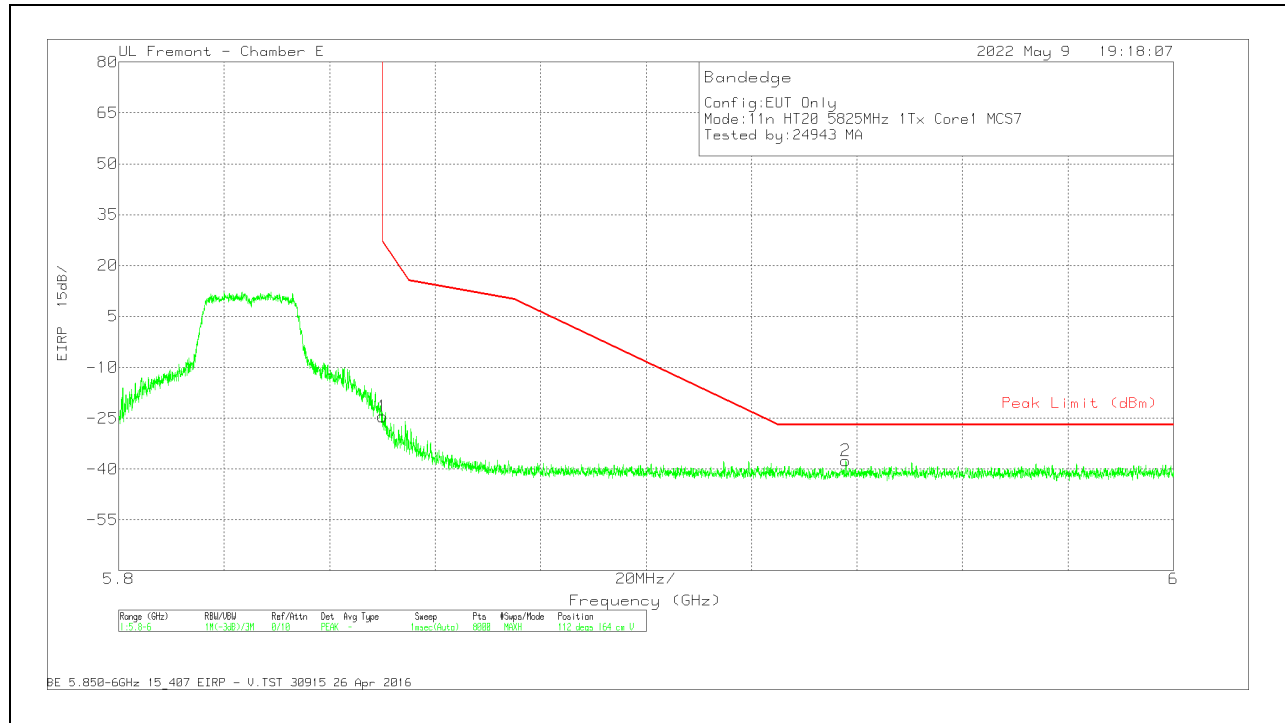


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-51.61	Pk	35	-19.7	11.8	0	-24.51	27	-51.51	112	164	V
2	5.937892	-64.37	Pk	35.1	-20	11.8	0	-37.47	-27	-10.47	112	164	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 CDD

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

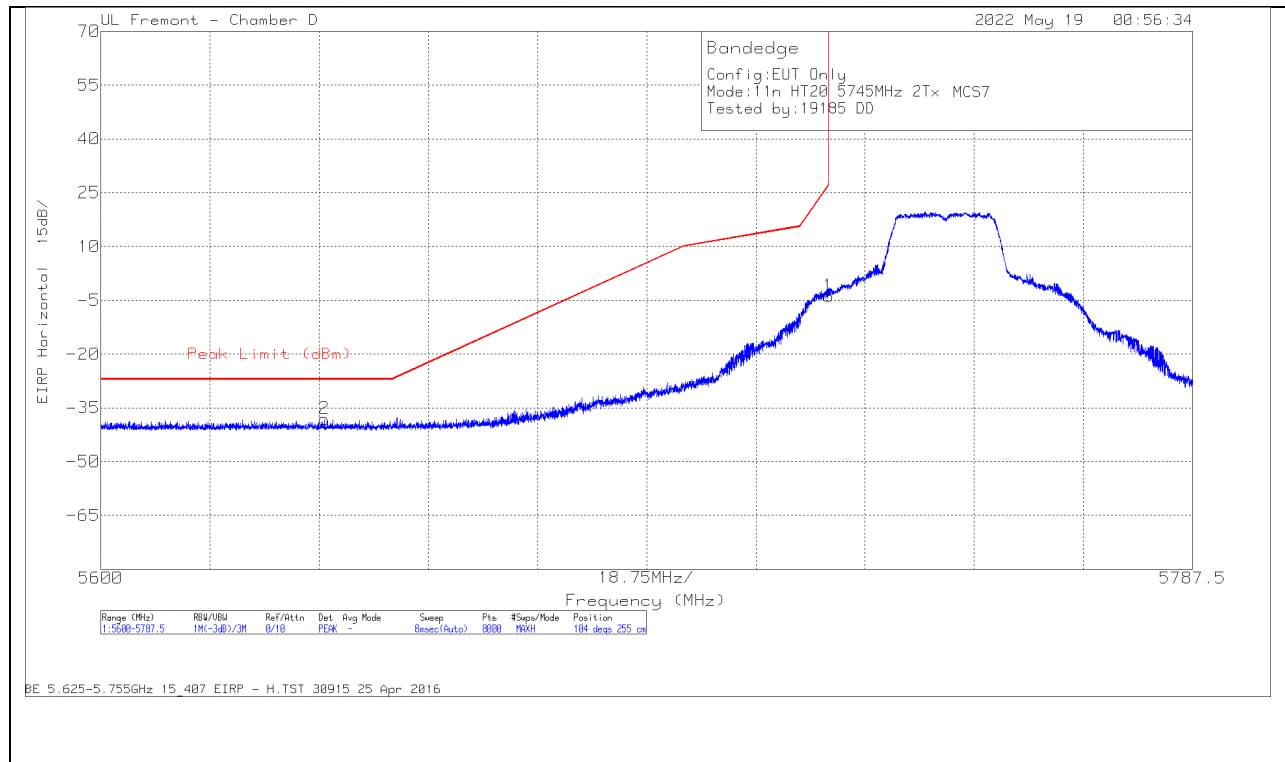

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5638.395	-66.77	Pk	34.6	-17.7	11.8	0	-38.07	-27	-11.07	104	255	H
1	5725	-32.48	Pk	34.7	-17.8	11.8	0	-3.78	27	-30.78	104	255	H

Pk - Peak detector

VERTICAL RESULT

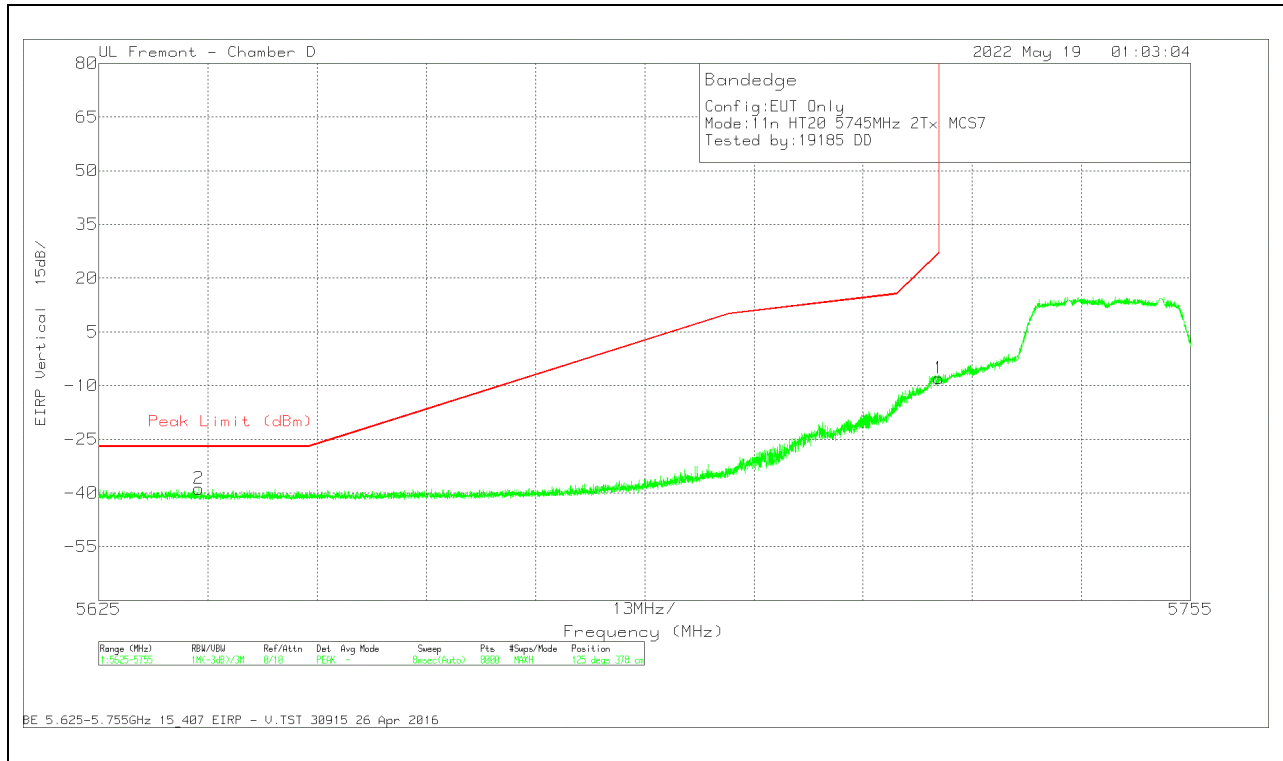


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5636.929	-67.49	Pk	34.6	-17.7	11.8	0	-38.79	-27	-11.79	125	378	V
1	5725	-36.7	Pk	34.7	-17.8	11.8	0	-8	27	-35	125	378	V

Pk - Peak detector

BANDEGE (HIGH CHANNEL)


HORIZONTAL RESULT

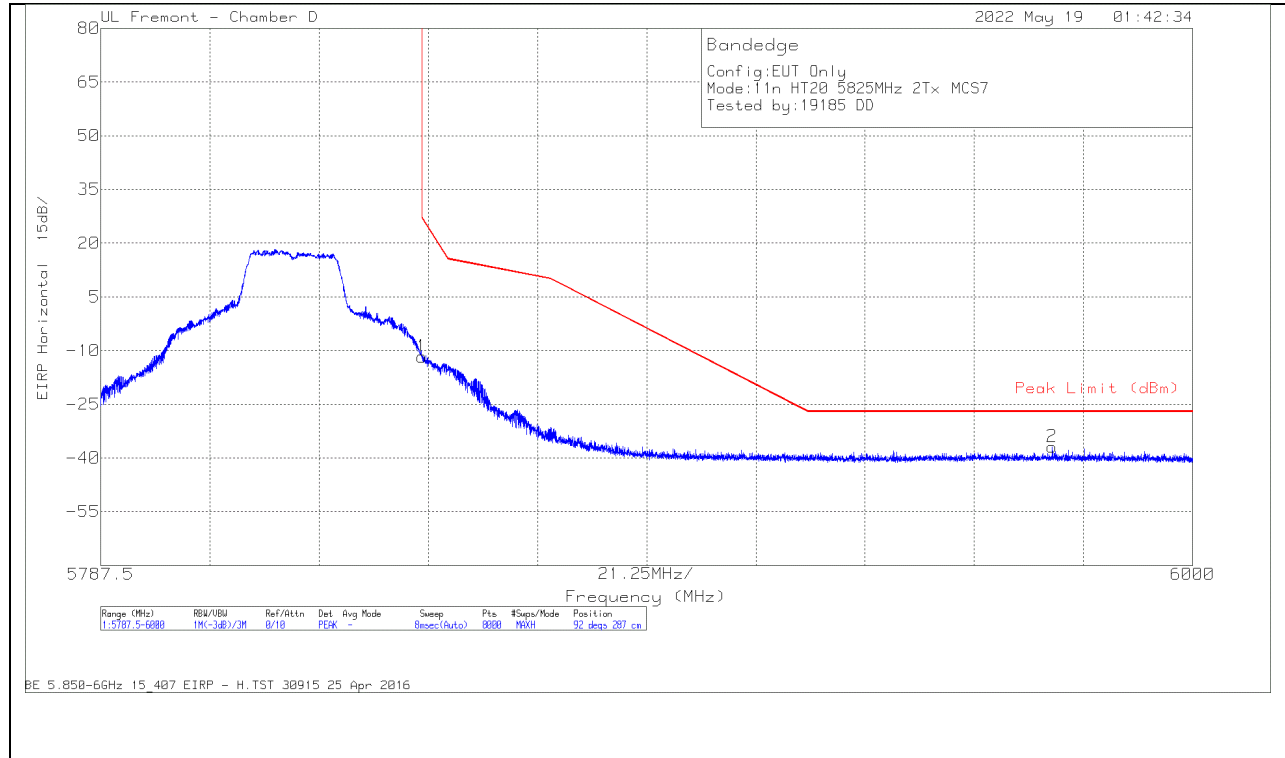

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-40.69	Pk	35	-17.8	11.8	0	-11.69	27	-38.69	92	287	H
2	5972.692	-66.26	Pk	35.3	-17.7	11.8	0	-36.86	-27	-9.86	92	287	H

Pk - Peak detector

VERTICAL RESULT

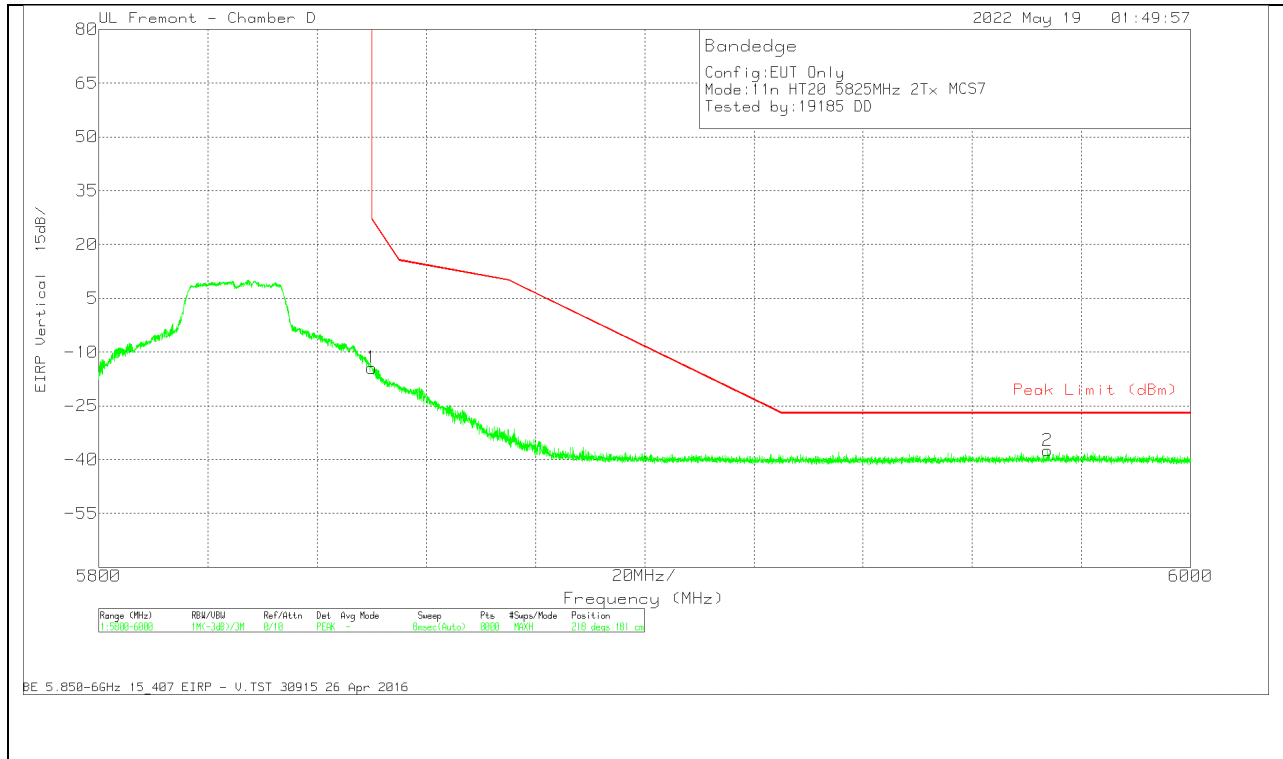


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-43.41	Pk	35	-17.8	11.8	0	-14.41	27	-41.41	218	181	V
2	5973.821	-66.87	Pk	35.3	-17.7	11.8	0	-37.47	-27	-10.47	218	181	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

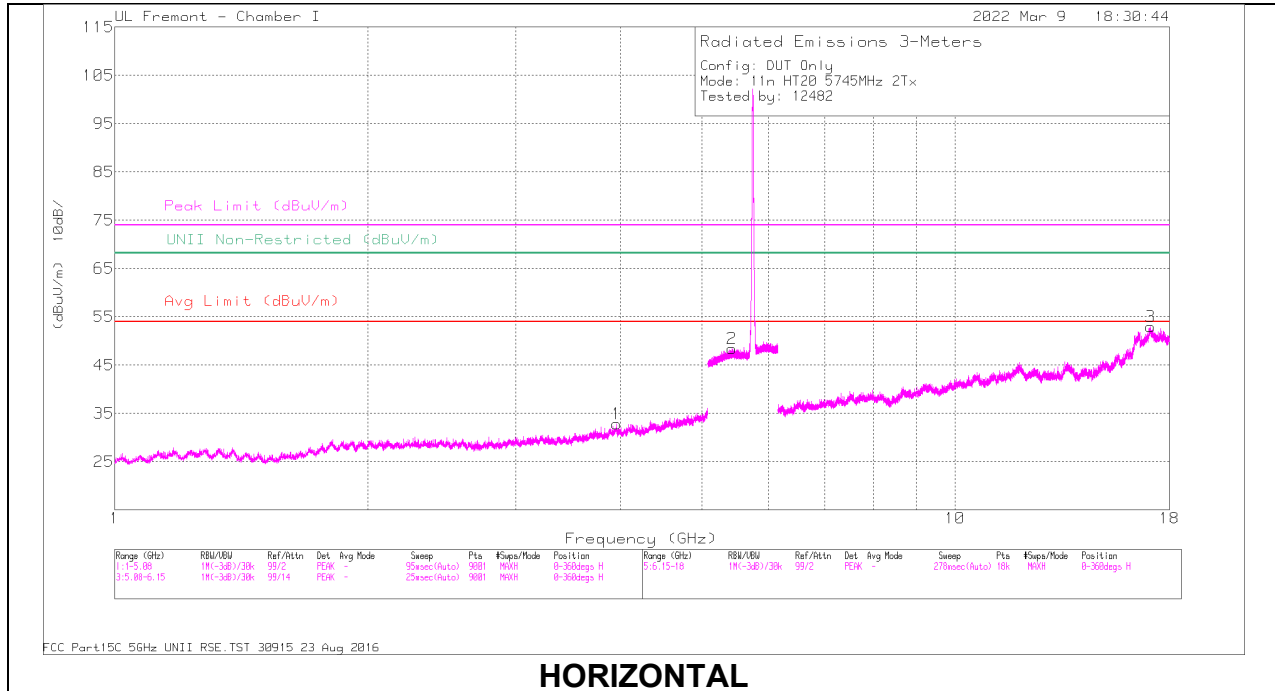

HORIZONTAL

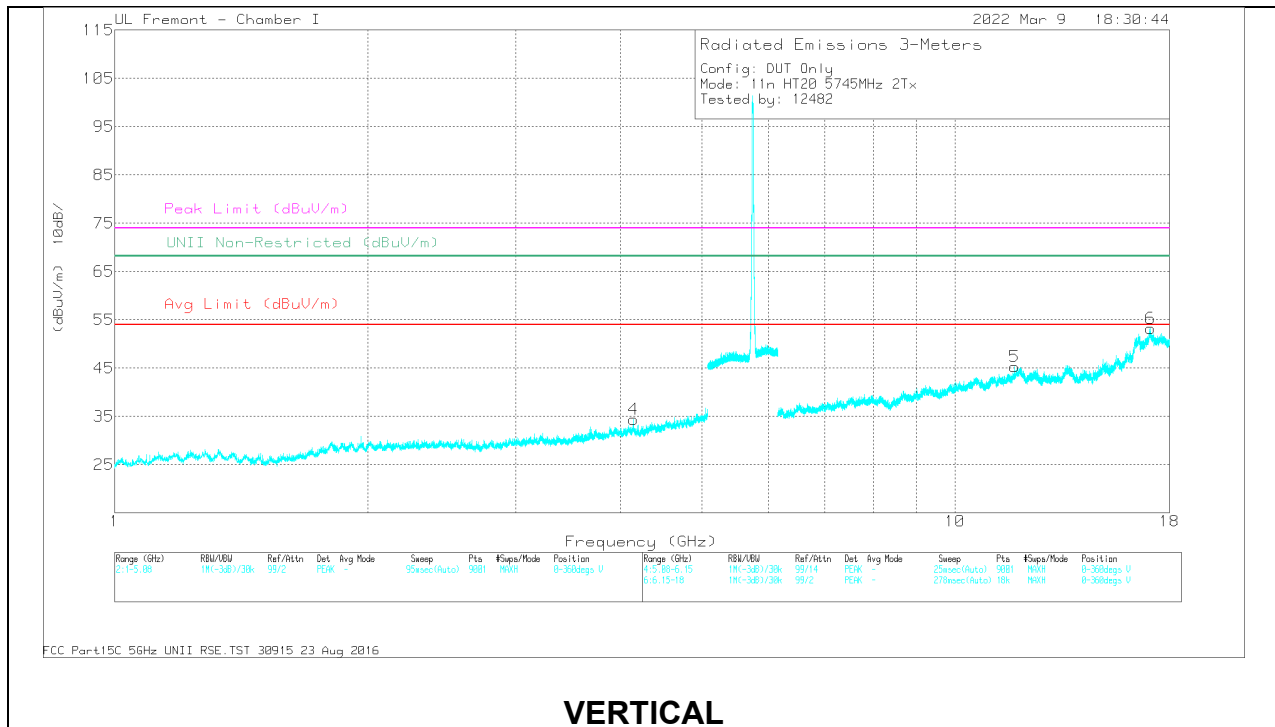

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricte d (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.957	35.65	PK-U	33.5	-26.8	0	42.35	-	-	74	-31.65	-	-	147	279	H
	* 3.9547	24.42	ADR	33.5	-26.7	.11	31.33	54	-22.67	-	-	-	-	147	279	H
4	* 4.1406	34.75	PK-U	33.3	-26	0	42.05	-	-	74	-31.95	-	-	222	112	V
	* 4.1439	23.58	ADR	33.3	-26	.11	30.99	54	-23.01	-	-	-	-	222	112	V
2	* 5.4312	38.27	PK-U	34.4	-15.1	0	57.57	-	-	74	-16.43	-	-	19	192	H
	* 5.4303	26.62	ADR	34.4	-15.1	.11	46.03	54	-7.97	-	-	-	-	19	192	H
3	17.0838	30.41	PK-U	42	-10.7	0	61.71	-	-	-	-	68.2	-6.49	0	237	H
5	* 11.7754	31.46	PK-U	38.5	-16.2	0	53.76	-	-	74	-20.24	-	-	114	174	V
	* 11.7737	19.86	ADR	38.5	-16.2	.11	42.27	54	-11.73	-	-	-	-	114	174	V
6	17.0858	30.57	PK-U	42	-10.7	0	61.87	-	-	-	-	68.2	-6.33	41	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

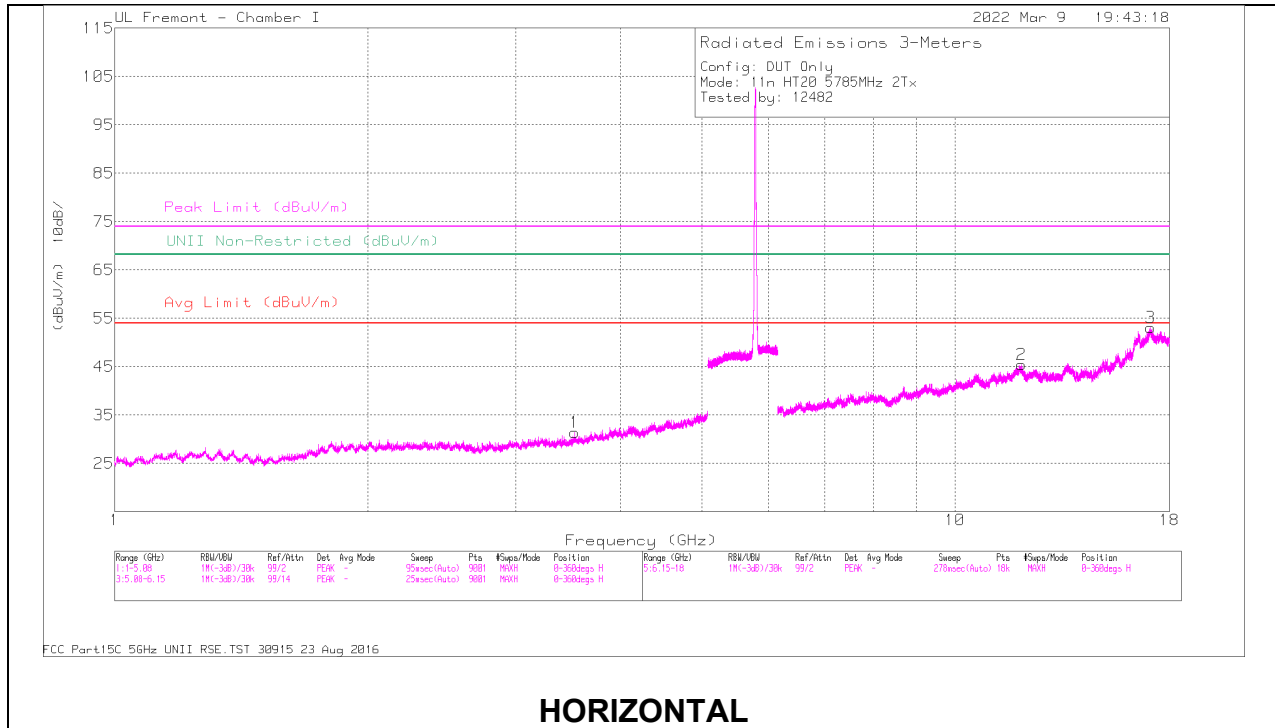

HORIZONTAL

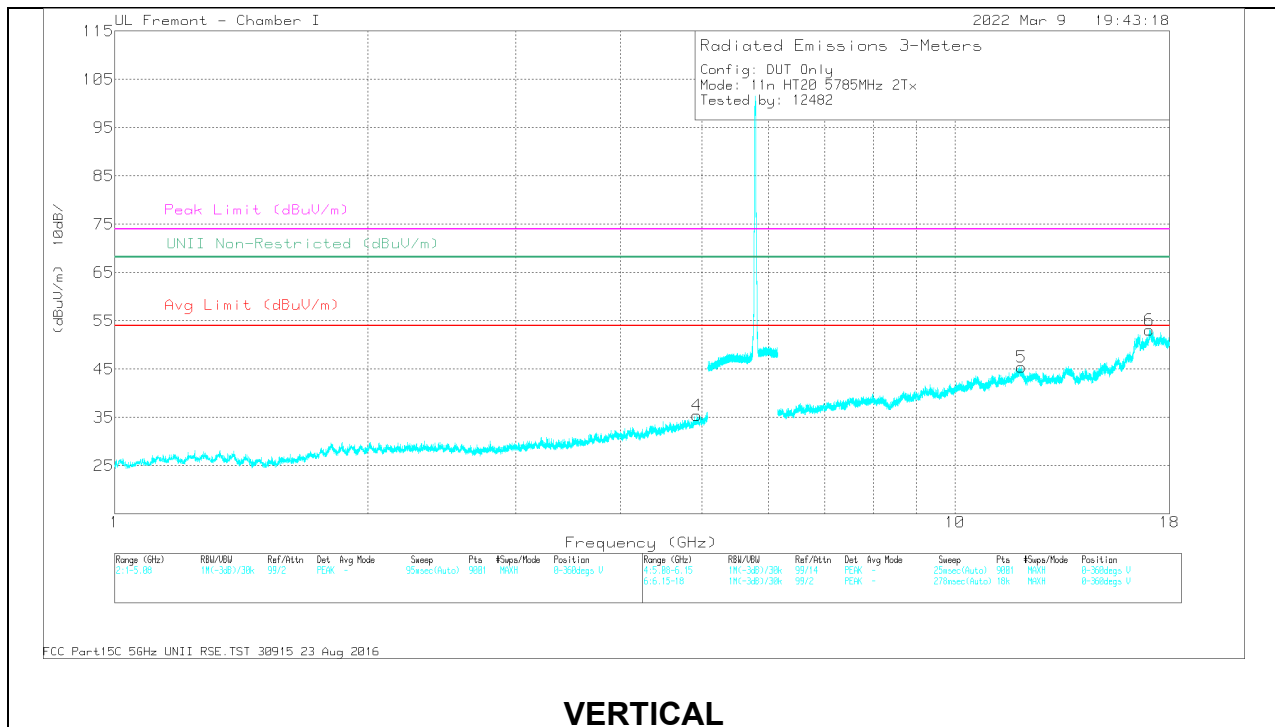

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cb/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.5264	34.28	PK-U	32.8	-27.4	0	39.68	-	-	74	-34.32	-	-	78	334	H
	* 3.5235	23.07	ADR	32.8	-27.4	.11	28.58	54	-25.42	-	-	-	-	78	334	H
4	* 4.9351	35.19	PK-U	33.8	-24.2	0	44.79	-	-	74	-29.21	-	-	78	334	V
	* 4.9358	23.45	ADR	33.8	-24.2	.11	33.16	54	-20.84	-	-	-	-	78	334	V
2	* 11.9900	31.69	PK-U	38.5	-16.1	0	54.09	-	-	74	-19.91	-	-	147	201	H
	* 11.9917	20.24	ADR	38.5	-16.1	.11	42.75	54	-11.25	-	-	-	-	147	201	H
3	17.0985	30.28	PK-U	42	-10.7	0	61.58	-	-	-	-	68.2	-6.62	136	296	H
5	* 11.9915	31.52	PK-U	38.5	-16.1	0	53.92	-	-	74	-20.08	-	-	86	356	V
	* 11.9908	20.37	ADR	38.5	-16.1	.11	42.88	54	-11.12	-	-	-	-	86	356	V
6	17.02982	30.64	PK-U	42	-10.9	0	61.74	-	-	-	-	68.2	-6.46	214	327	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

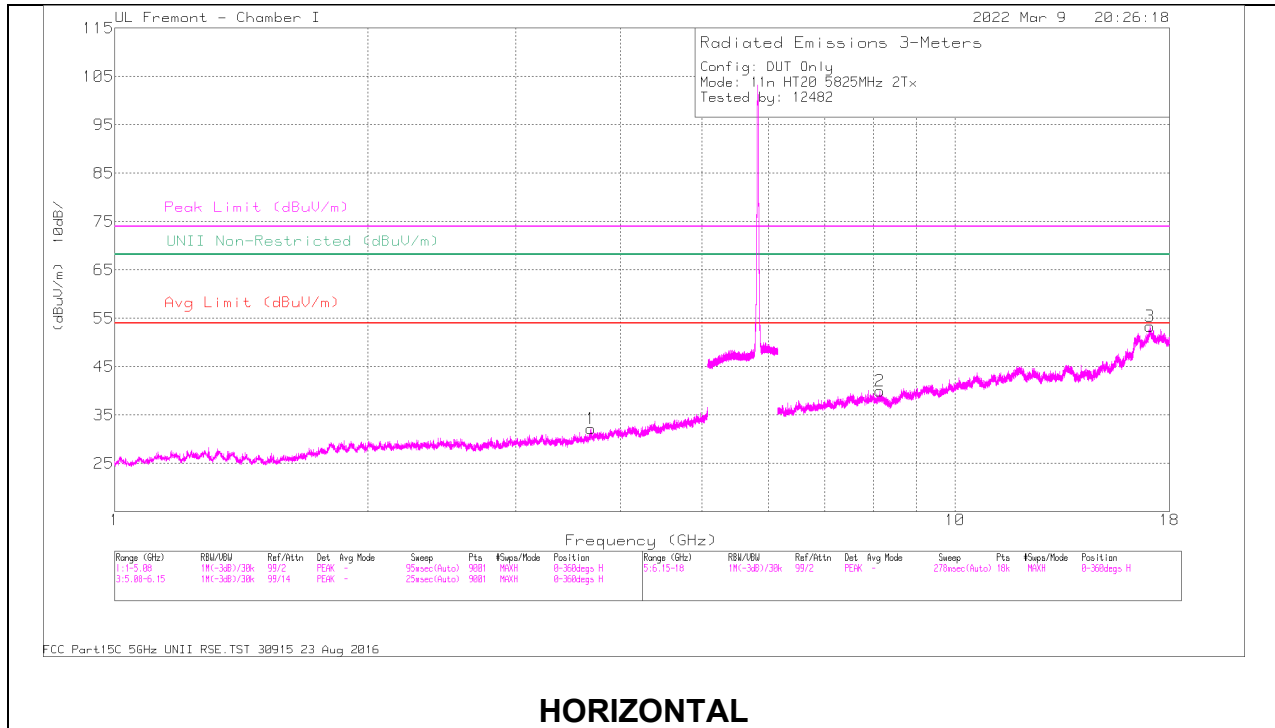

HORIZONTAL

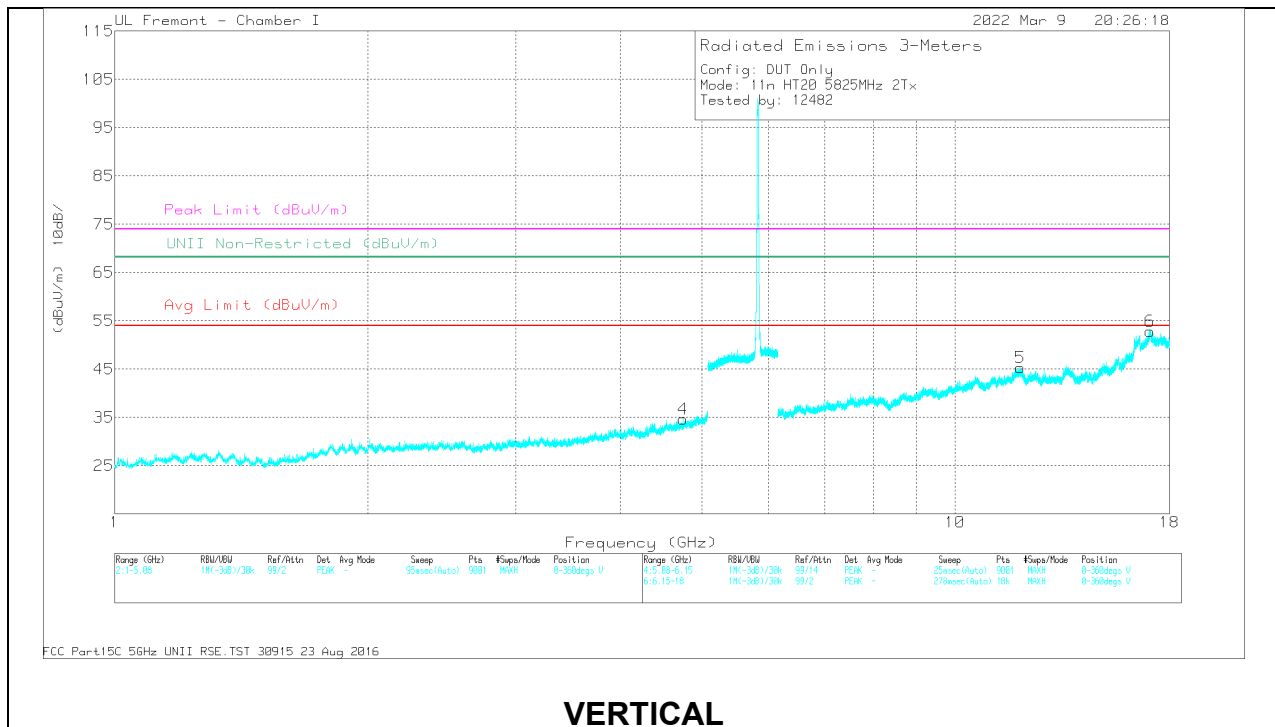

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.6889	34.61	PK-U	33.1	-27	0	40.71	-	-	74	-33.29	-	-	324	191	H
	* 3.6923	22.97	ADR	33.1	-27	.11	29.18	54	-24.82	-	-	-	-	324	191	H
4	* 4.7509	34.93	PK-U	34	-25.4	0	43.53	-	-	74	-30.47	-	-	84	262	V
	* 4.7507	23.25	ADR	34	-25.4	.11	31.96	54	-22.04	-	-	-	-	84	262	V
2	* 8.1440	31.55	PK-U	35.7	-18.4	0	48.85	-	-	74	-25.15	-	-	234	132	H
	* 8.1444	19.9	ADR	35.7	-18.4	.11	37.31	54	-16.69	-	-	-	-	234	132	H
3	17.0776	30.77	PK-U	42	-10.9	0	61.87	-	-	-	-	68.2	-6.33	33	165	H
5	* 11.9527	31.96	PK-U	38.5	-16.2	0	54.26	-	-	74	-19.74	-	-	324	289	V
	* 11.949	20.42	ADR	38.5	-16.1	.11	42.93	54	-11.07	-	-	-	-	324	289	V
6	17.0780	30.59	PK-U	42	-10.9	0	61.69	-	-	-	-	68.2	-6.51	277	311	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.2.20. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND

1TX Antenna 6

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

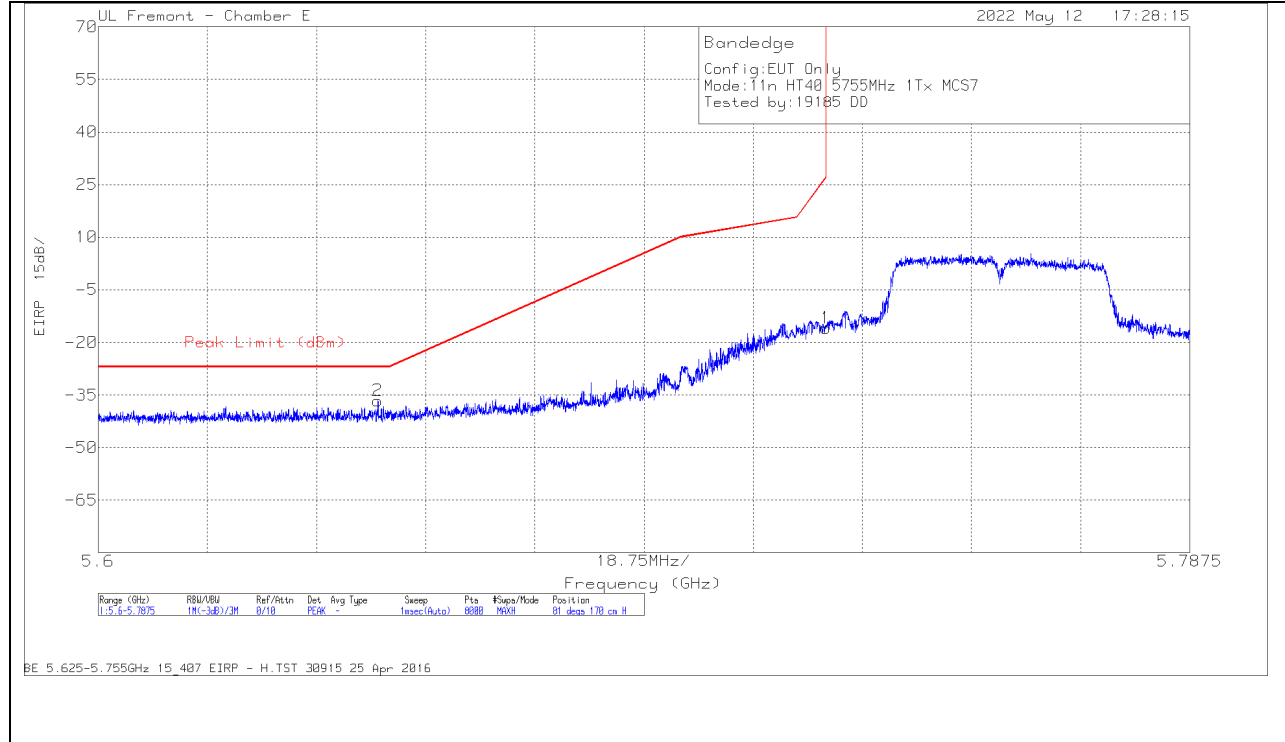

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cbl/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648052	-62.35	Pk	34.5	-20.6	11.8	0	-36.65	-27	-9.65	81	170	H
1	5.725	-42.07	Pk	34.7	-20.3	11.8	0	-15.87	27	-42.87	81	170	H

Pk - Peak detector

VERTICAL RESULT

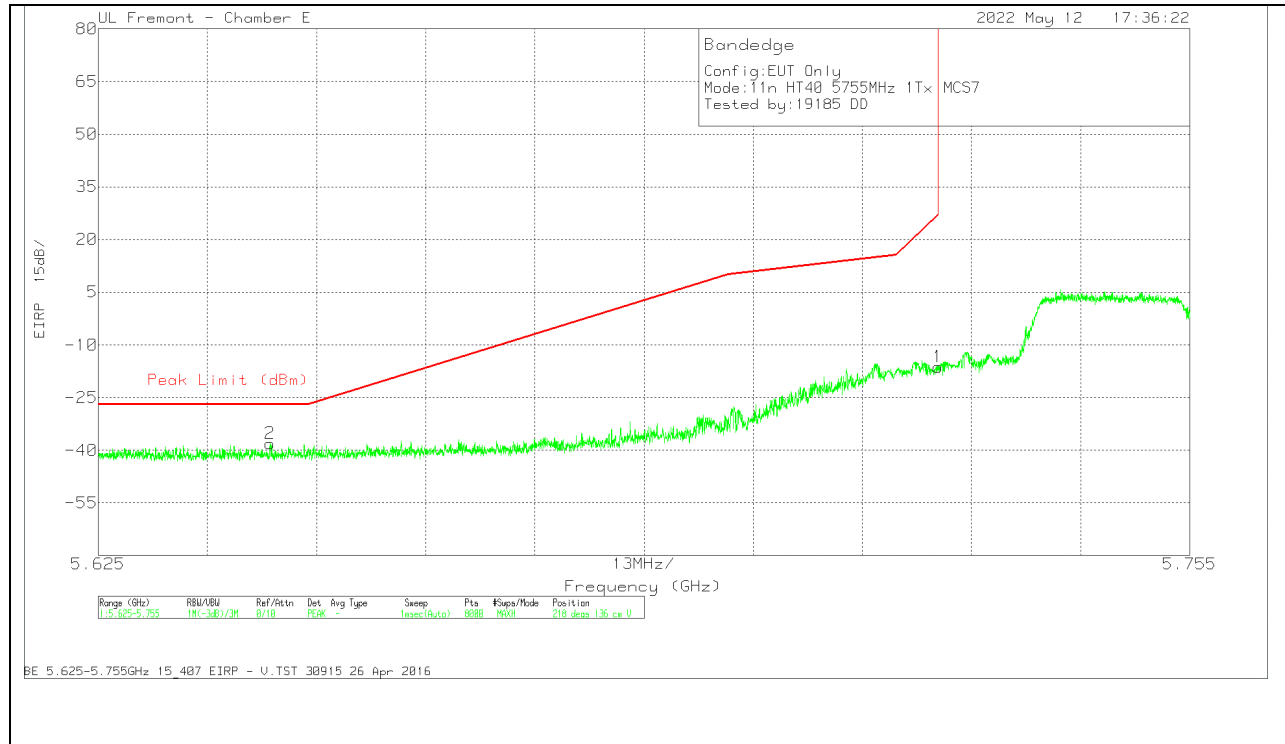


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cbl/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.645445	-63.84	Pk	34.6	-20.7	11.8	0	-38.14	-27	-11.14	218	136	V
1	5.725	-42.5	Pk	34.7	-20.3	11.8	0	-16.3	27	-43.3	218	136	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

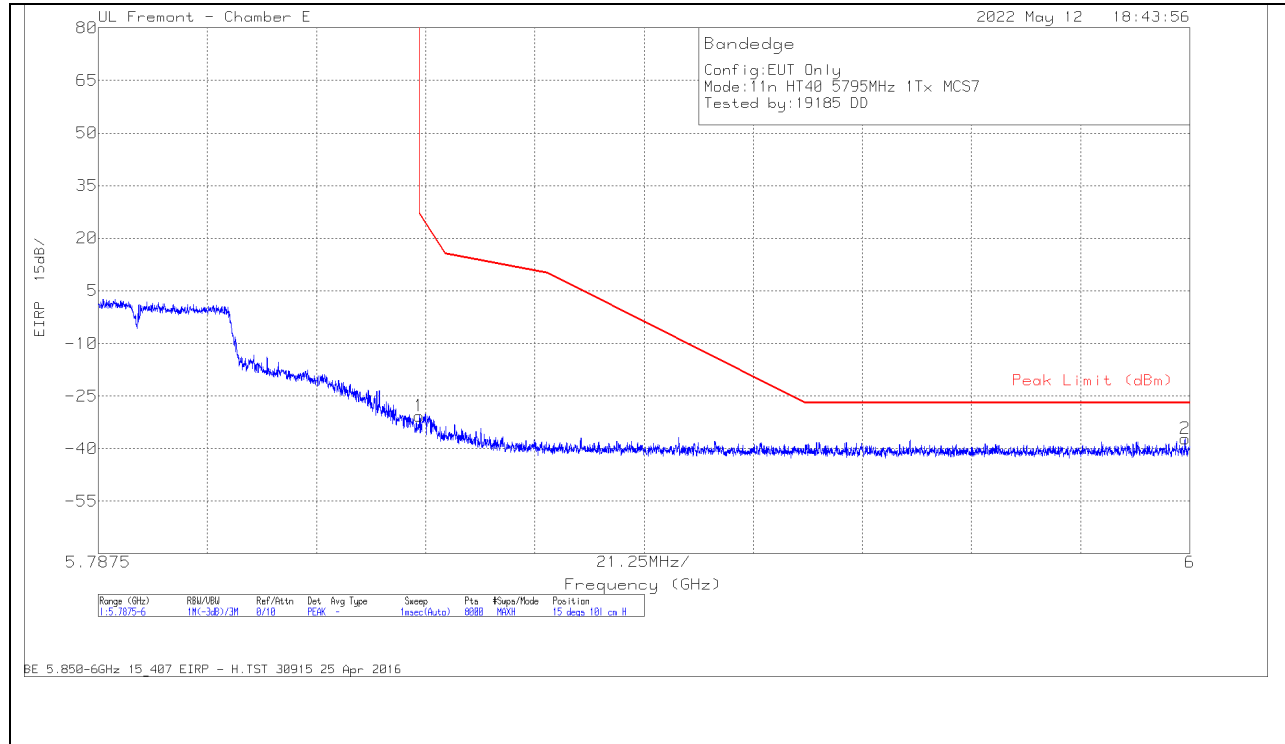

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cbl/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-57.74	Pk	35	-19.7	11.8	0	-30.64	27	-57.64	15	101	H
2	5.999072	-64.7	Pk	35.3	-19.6	11.8	0	-37.2	-27	-10.2	15	101	H

Pk - Peak detector

VERTICAL RESULT

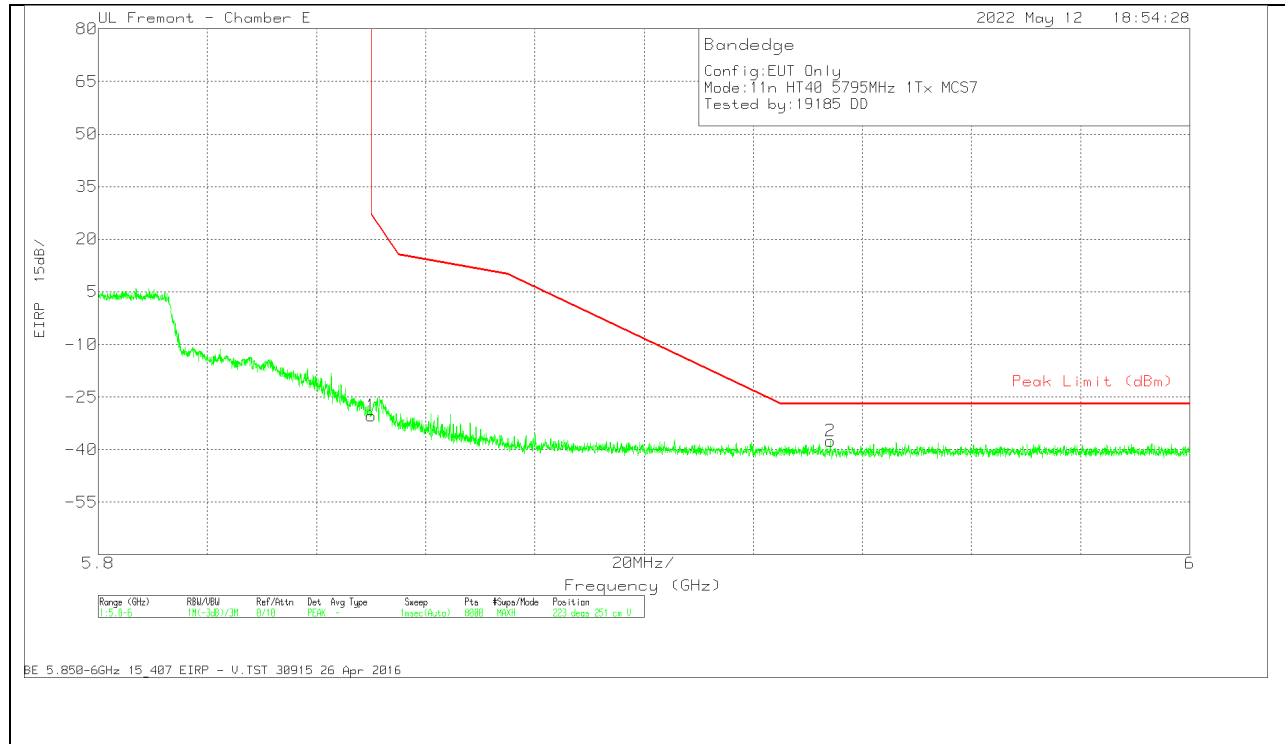


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cbl/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-57.4	Pk	35	-19.7	11.8	0	-30.3	27	-57.3	223	251	V
2	5.934141	-64.41	Pk	35.1	-20	11.8	0	-37.51	-27	-10.51	223	251	V

Pk - Peak detector

1TX Antenna 5

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

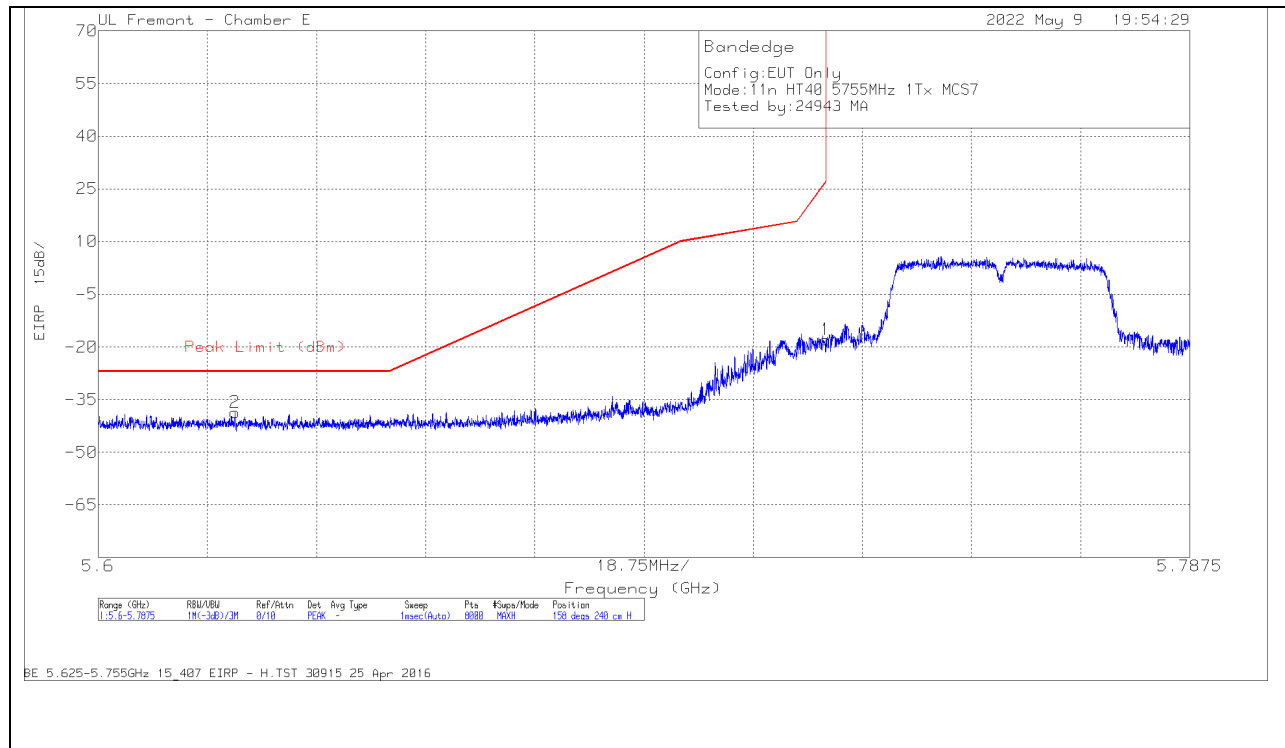

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cbl/PA d (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.623487	-64.31	Pk	34.5	-20.7	11.8	0	-38.71	-27	-11.71	158	240	H
1	5.725	-44.25	Pk	34.7	-20.3	11.8	0	-18.05	27	-45.05	158	240	H

Pk - Peak detector

VERTICAL RESULT

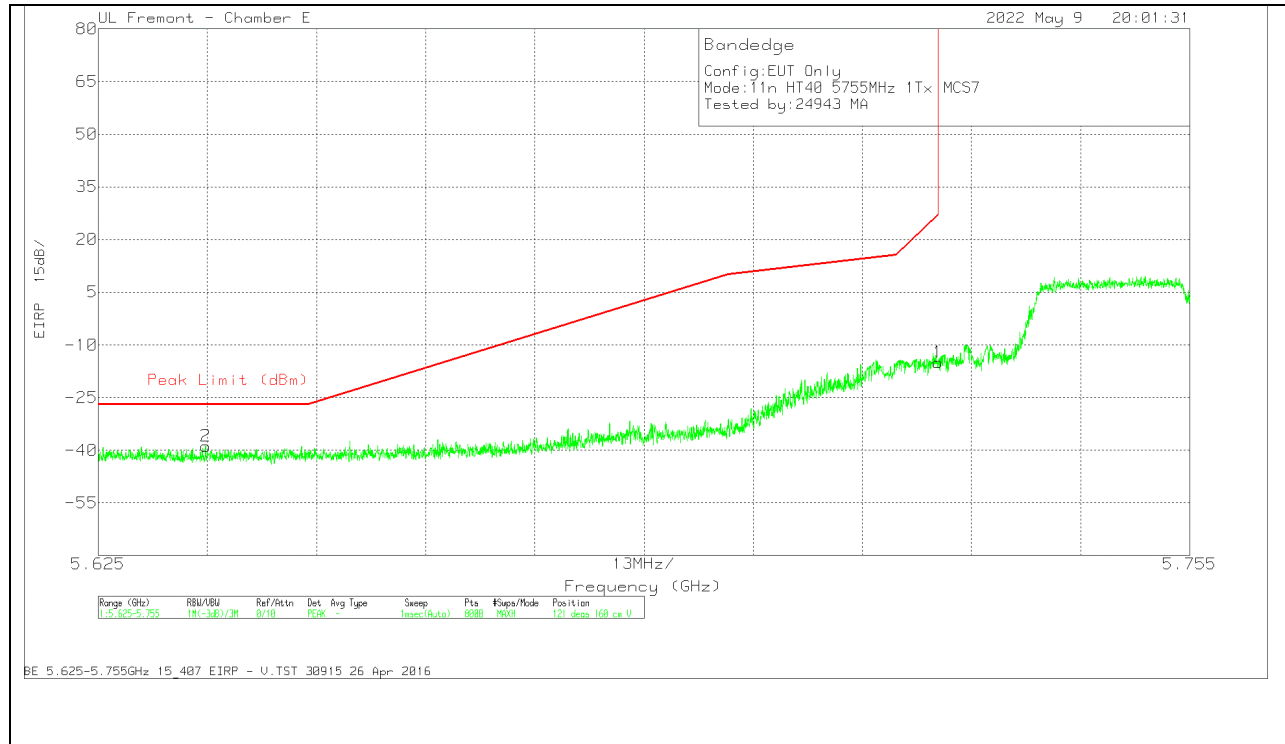


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63779	-64.41	Pk	34.5	-20.7	11.8	0	-38.81	-27	-11.81	121	160	V
1	5.725	-41.17	Pk	34.7	-20.3	11.8	0	-14.97	27	-41.97	121	160	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

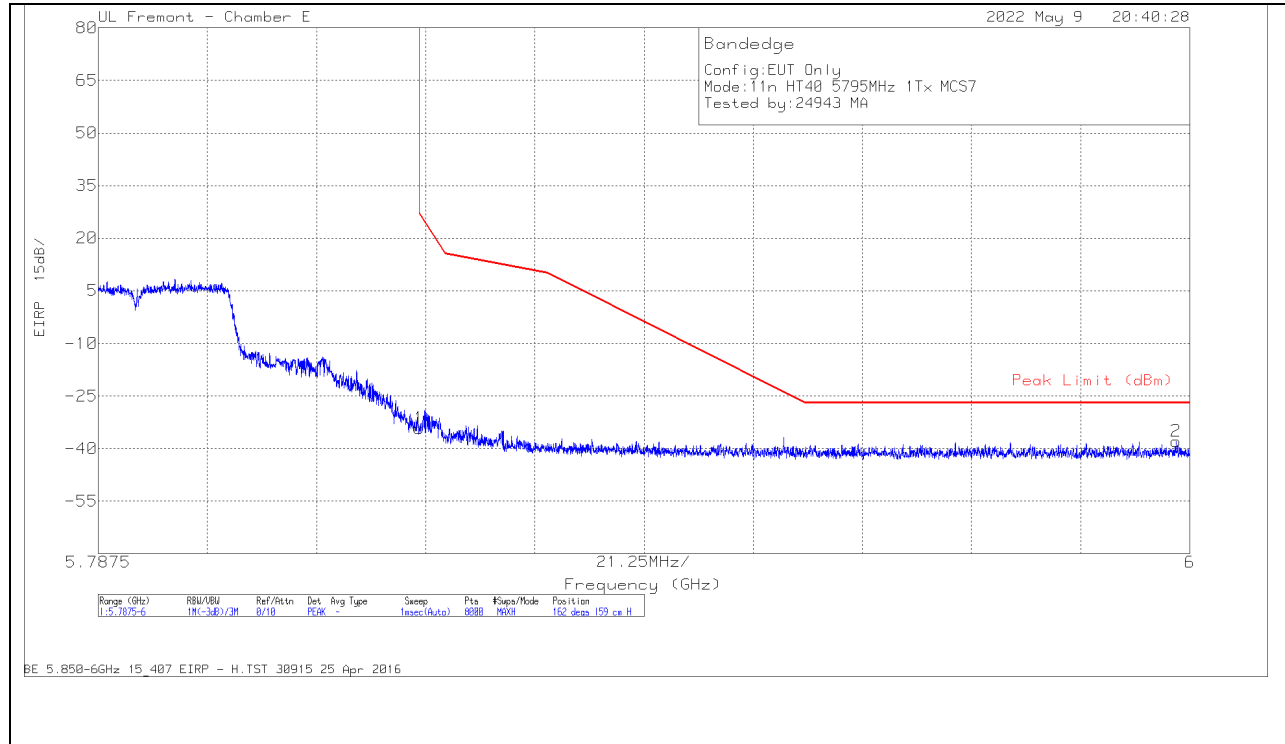

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cbl/Pa d (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-61.38	Pk	35	-19.7	11.8	0	-34.28	27	-61.28	162	159	H
2	5.997345	-65.47	Pk	35.3	-19.6	11.8	0	-37.97	-27	-10.97	162	159	H

Pk - Peak detector

VERTICAL RESULT

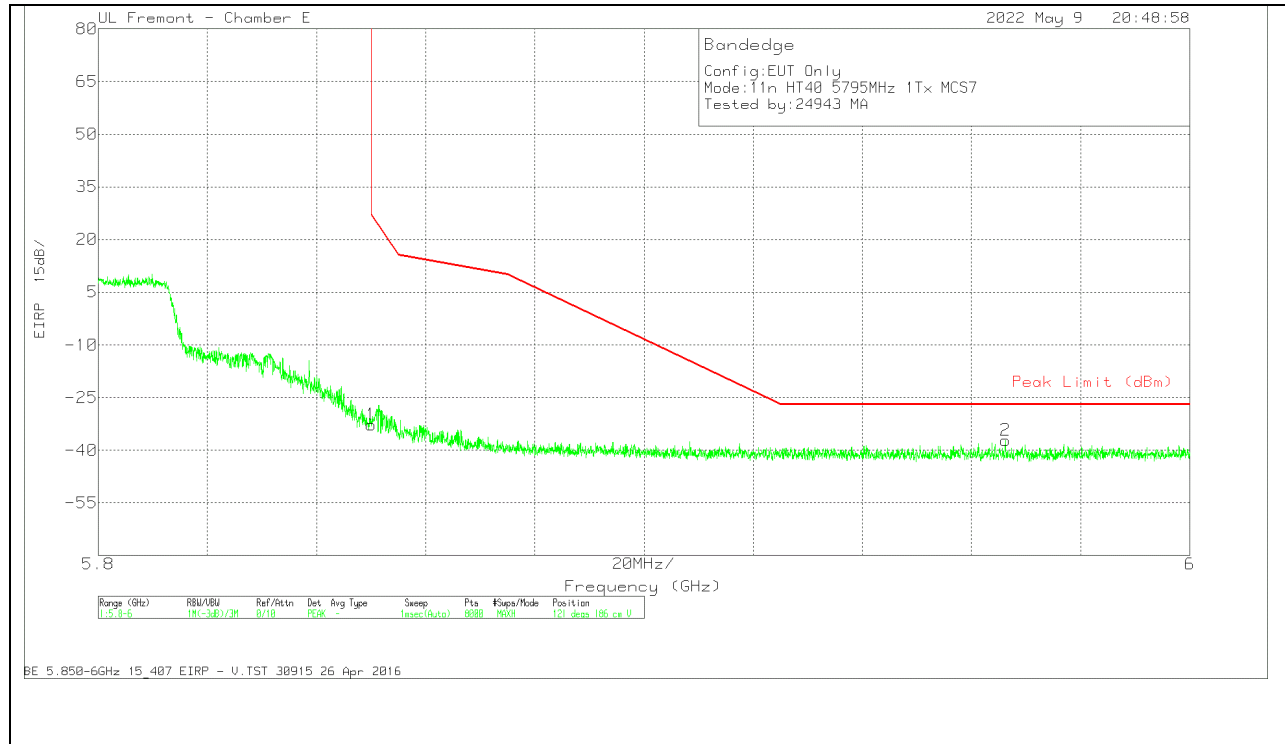


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200897 ACF (dB/m)	Amp/Cb/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-59.82	Pk	35	-19.7	11.8	0	-32.72	27	-59.72	121	186	V
2	5.96622	-64.35	Pk	35.2	-19.9	11.8	0	-37.25	-27	-10.25	121	186	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 CDD

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

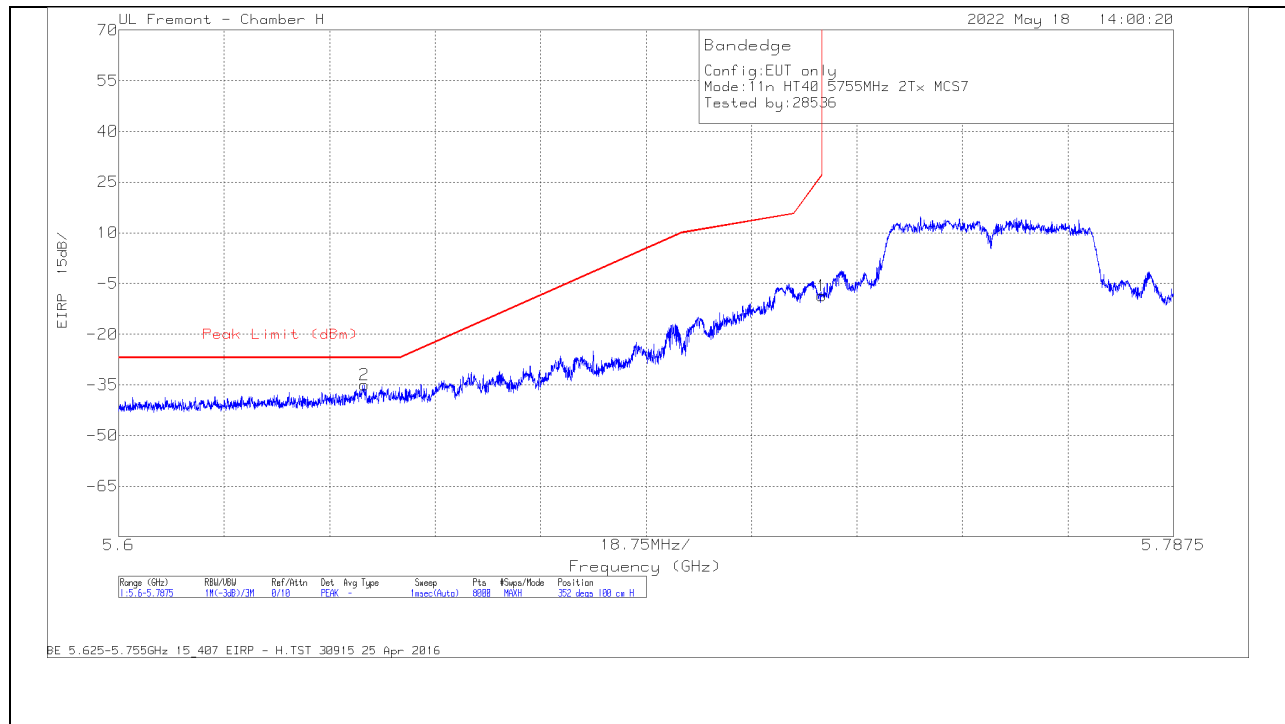

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80430 (dB/m)	Amp/Cbl /Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.643669	-59.09	Pk	34.9	-22.7	11.8	0	-35.09	-27	-8.09	352	100	H
1	5.725	-32.8	Pk	34.9	-22.6	11.8	0	-8.7	27	-35.7	352	100	H

Pk - Peak detector

VERTICAL RESULT

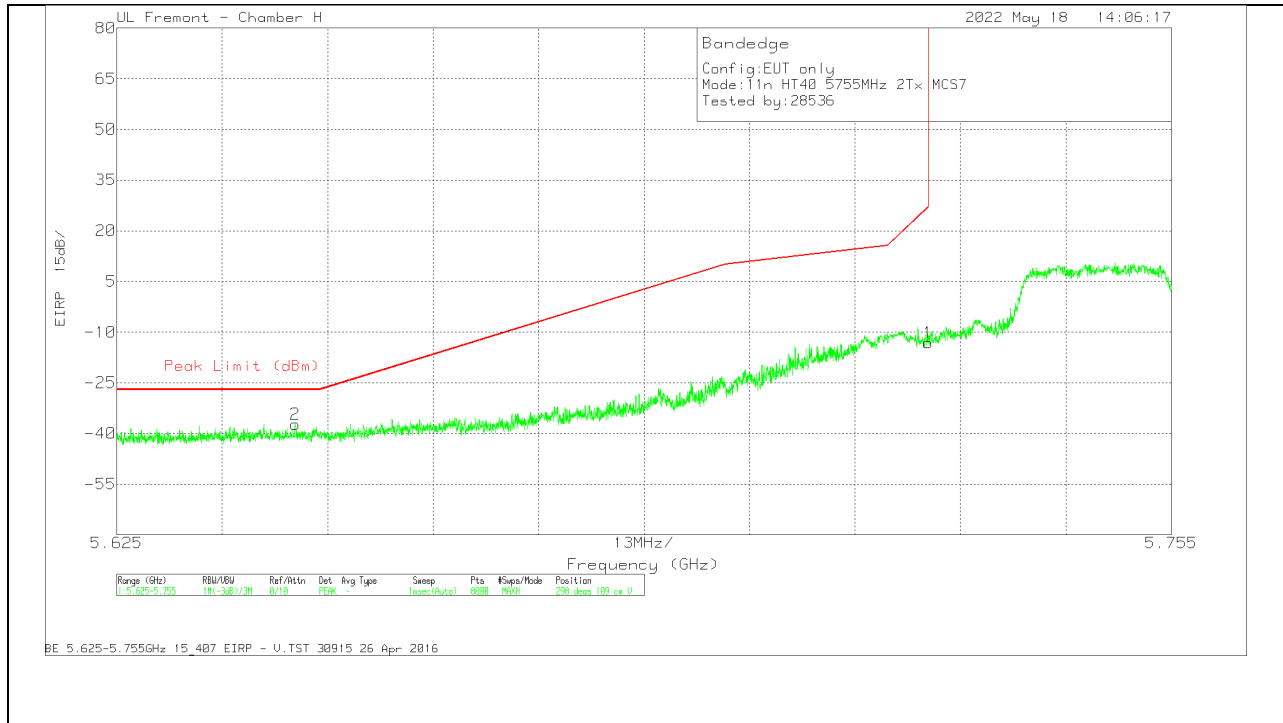


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80430 (dB/m)	Amp/Cbl /Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.646989	-61.23	Pk	34.9	-22.7	11.8	0	-37.23	-27	-10.23	298	109	V
1	5.725	-37.28	Pk	34.9	-22.6	11.8	0	-13.18	27	-40.18	298	109	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

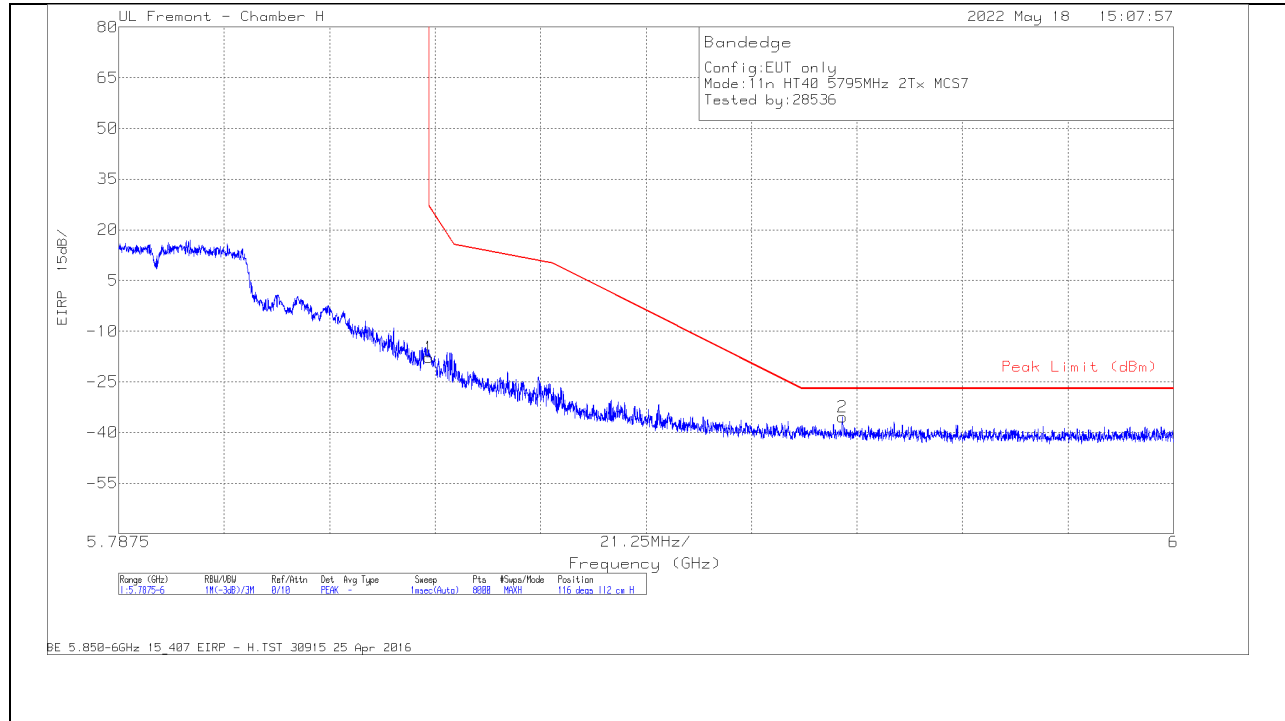

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80430 (dB/m)	Amp/Cbl /Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.39	Pk	35.3	-22.4	11.8	0	-17.69	27	-44.69	116	112	H
2	5.933321	-60.13	Pk	35.4	-22.5	11.8	0	-35.43	-27	-8.43	116	112	H

Pk - Peak detector

VERTICAL RESULT

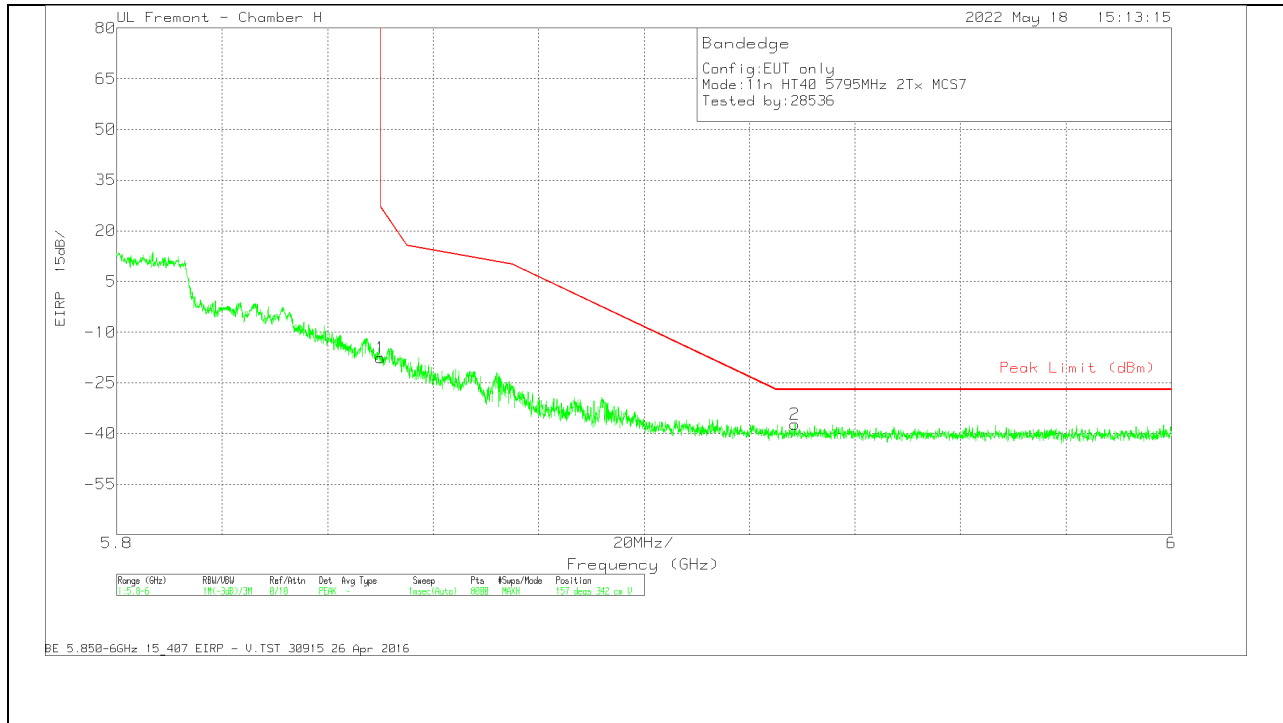


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80430 (dB/m)	Amp/Cbl /Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.22	Pk	35.3	-22.4	11.8	0	-17.52	27	-44.52	157	342	V
2	5.928615	-61.93	Pk	35.4	-22.5	11.8	0	-37.23	-27	-10.23	157	342	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

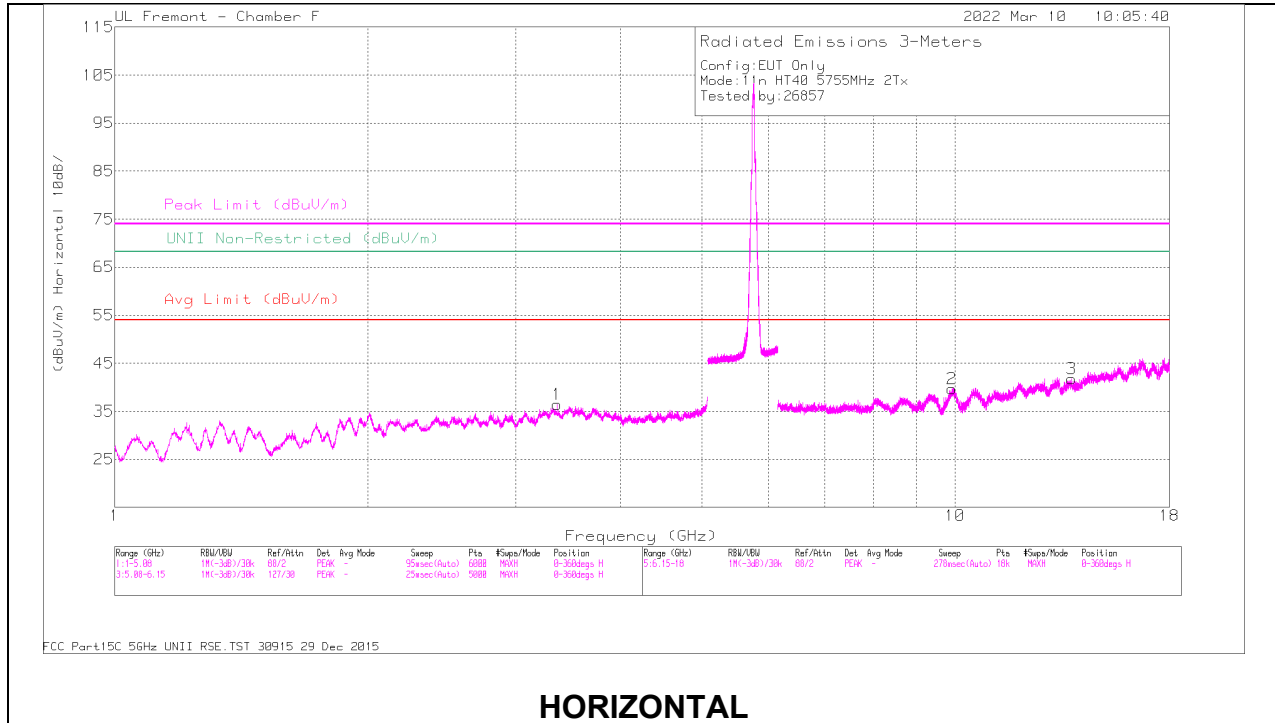

HORIZONTAL

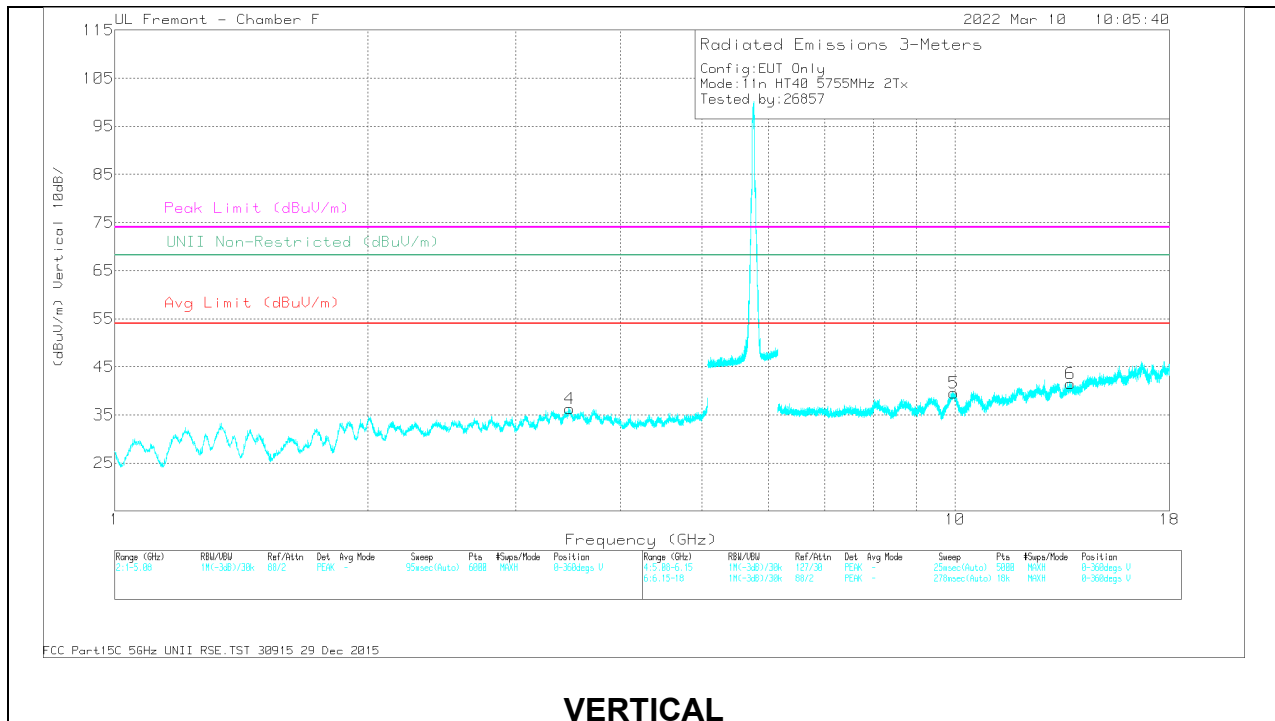

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F Itri/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.3460	56.33	PK-U	34.6	-46.6	0	44.33	-	-	74	-29.67	-	-	185	288	H
	* 3.3512	45.24	ADR	34.7	-46.5	.19	33.63	54	-20.37	-	-	-	-	185	288	H
4	3.4793	57.67	PK-U	35.5	-46.9	0	46.27	-	-	-	-	68.2	-21.93	57	112	V
2	9.9176	58.22	PK-U	37.2	-46.3	0	49.12	-	-	-	-	68.2	-19.08	108	305	H
3	13.7638	57.31	PK-U	39.1	-45.2	0	51.21	-	-	-	-	68.2	-16.99	289	265	H
5	9.9703	58.27	PK-U	37.1	-46.5	0	48.87	-	-	-	-	68.2	-19.33	0	338	V
6	13.7128	57	PK-U	39.1	-45.4	0	50.7	-	-	-	-	68.2	-17.5	239	348	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

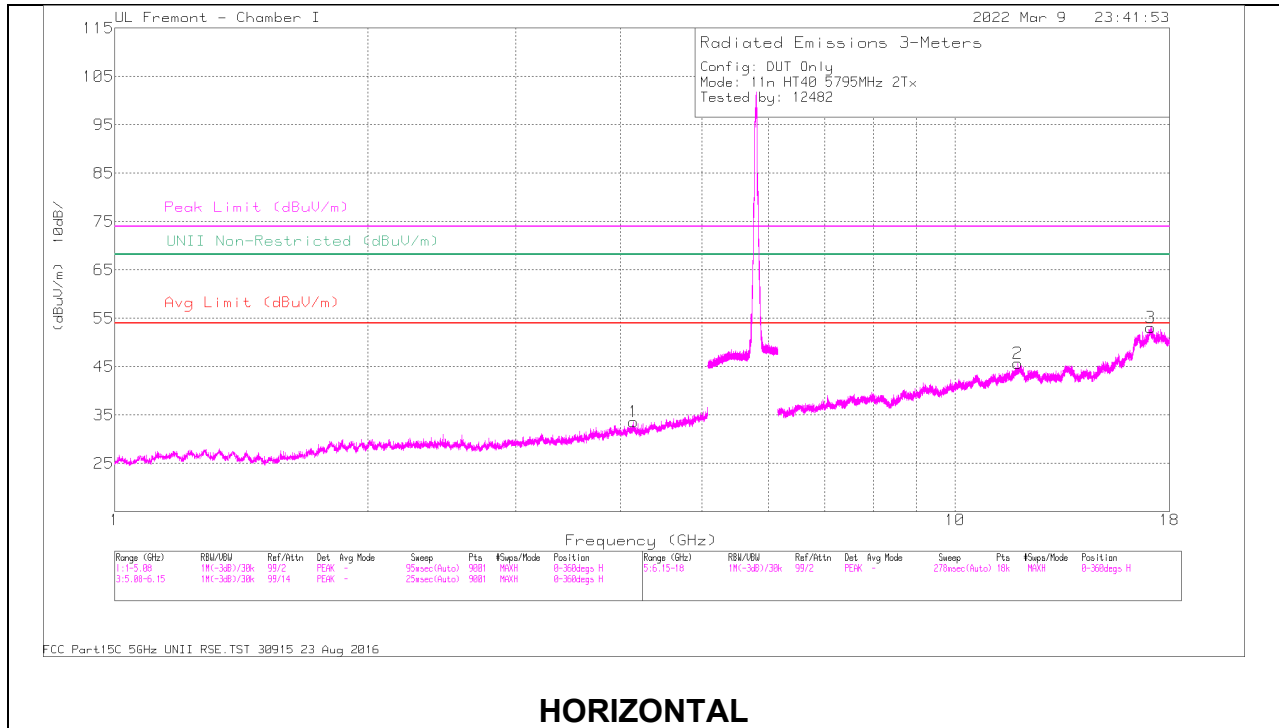

HORIZONTAL

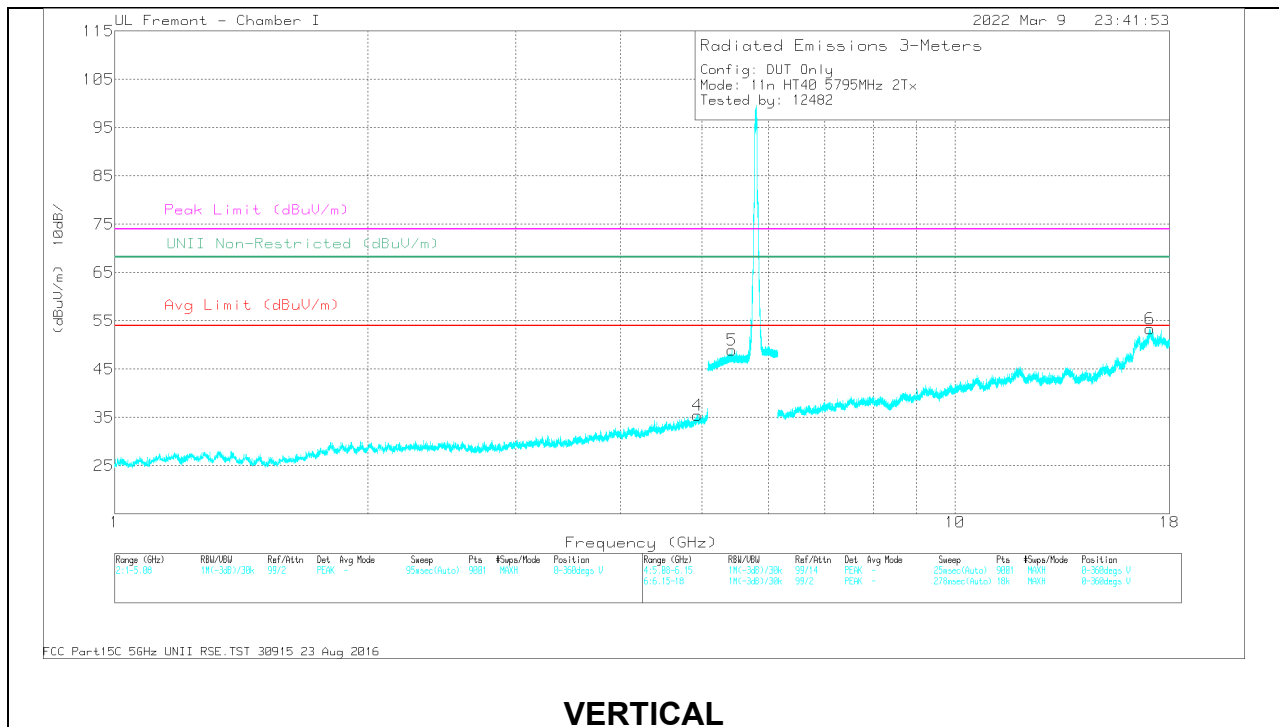

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 206805 (dBm)	Amp/Cbl/F Itr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.1450	35.74	PK-U	33.3	-26	0	43.04	-	-	74	-30.96	-	-	360	128	H
	* 4.1467	24.06	ADR	33.3	-26.1	.19	31.45	54	-22.55	-	-	-	-	360	128	H
4	* 4.9382	35.41	PK-U	33.8	-24.3	0	44.91	-	-	74	-29.09	-	-	32	224	V
	* 4.9389	23.48	ADR	33.8	-24.3	.19	33.17	54	-20.83	-	-	-	-	32	224	V
5	* 5.4254	38.62	PK-U	34.4	-15.1	0	57.92	-	-	74	-16.08	-	-	241	154	V
	* 5.4238	26.78	ADR	34.4	-15.1	.19	46.27	54	-7.73	-	-	-	-	241	154	V
2	* 11.874	32.12	PK-U	38.5	-16.6	0	54.02	-	-	74	-19.98	-	-	55	289	H
	* 11.8738	20.43	ADR	38.5	-16.6	.19	42.52	54	-11.48	-	-	-	-	55	289	H
3	17.1009	30.9	PK-U	42	-10.8	0	62.1	-	-	-	-	68.2	-6.1	337	157	H
6	17.0777	31.02	PK-U	42	-10.9	0	62.12	-	-	-	-	68.2	-6.08	70	362	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

1.2.21. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

1TX Antenna 6

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

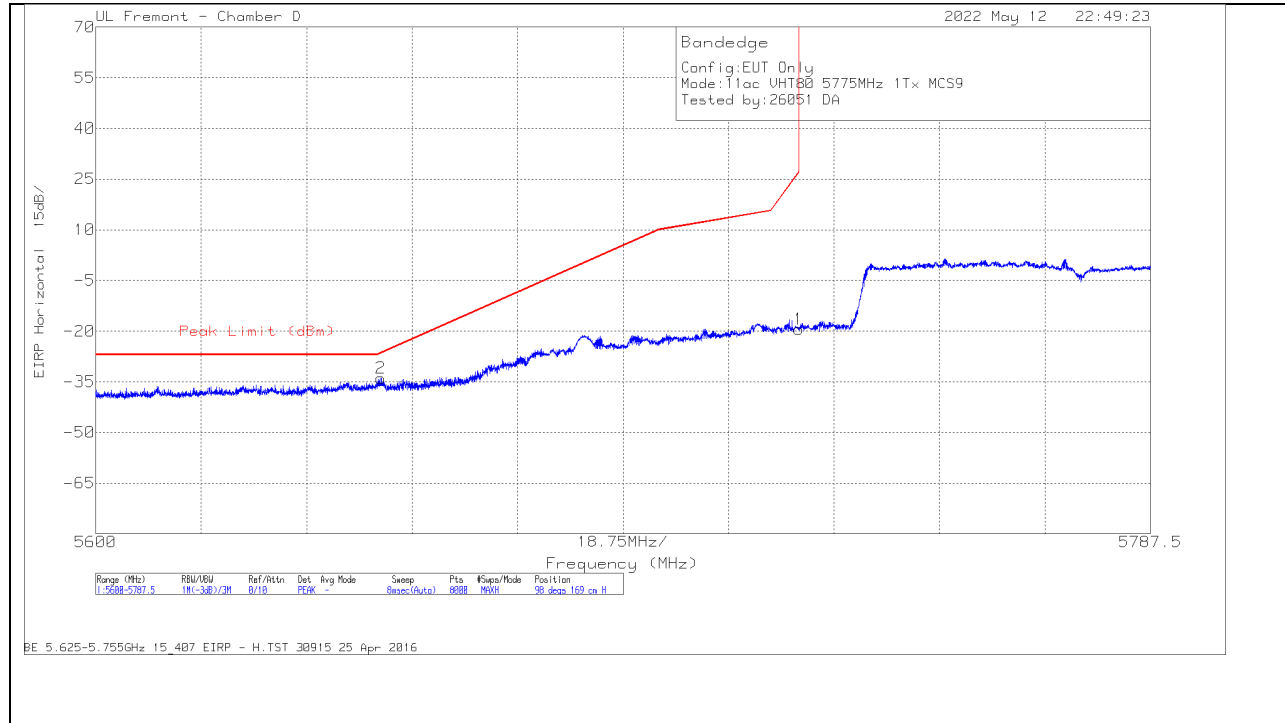

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5650.724	-62.63	Pk	34.6	-17.6	11.8	0	-33.83	-26.46	-7.37	98	169	H
1	5725	-48.07	Pk	34.7	-17.8	11.8	0	-19.37	27	-46.37	98	169	H

Pk - Peak detector

VERTICAL RESULT

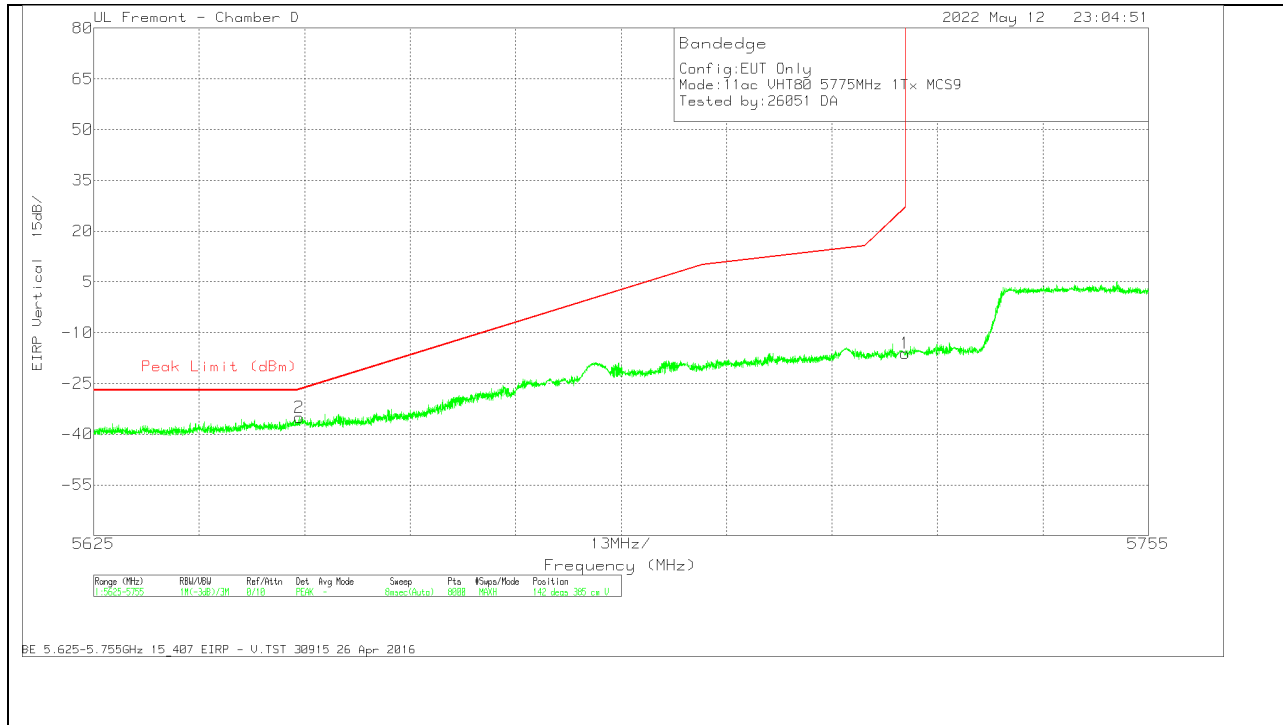


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5650.304	-63.82	Pk	34.6	-17.6	11.8	0	-35.02	-26.77	-8.25	142	385	V
1	5725	-44.76	Pk	34.7	-17.8	11.8	0	-16.06	27	-43.06	142	385	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

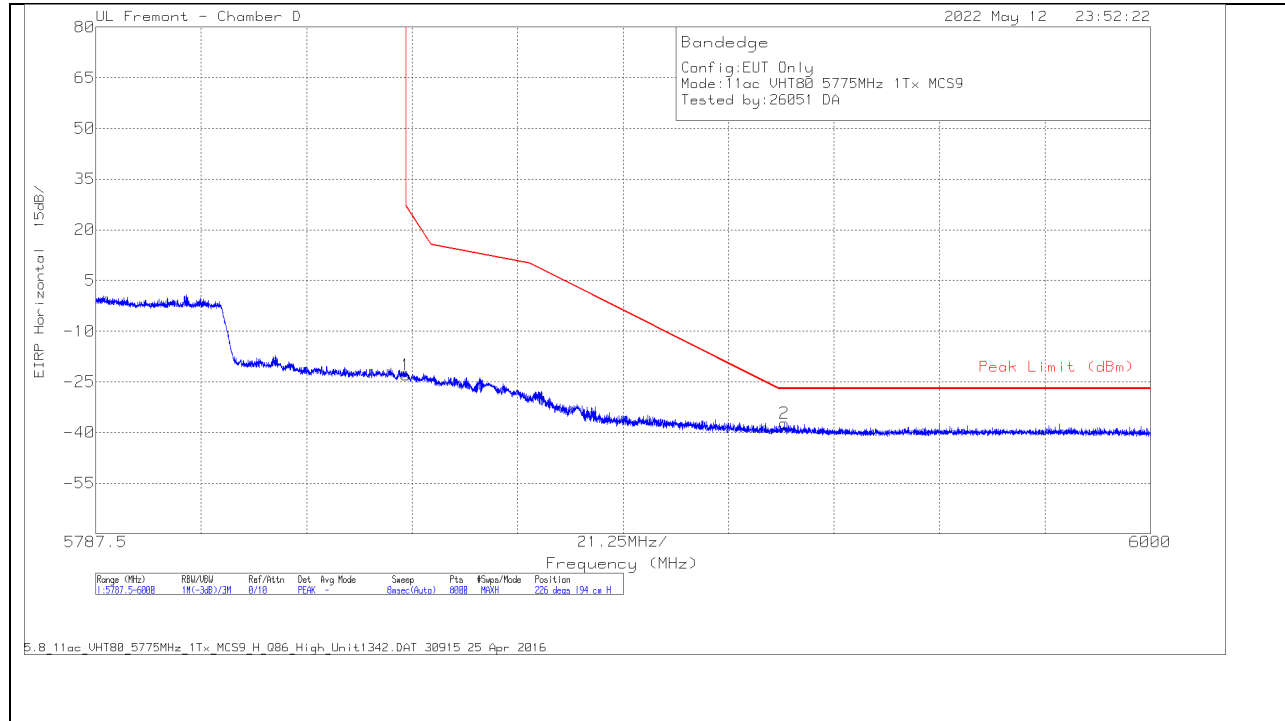

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-51.89	Pk	35	-17.8	11.8	0	-22.89	27	-49.89	226	194	H
2	5926.201	-66.71	Pk	35.2	-17.5	11.8	0	-37.21	-27	-10.21	226	194	H

Pk - Peak detector

VERTICAL RESULT

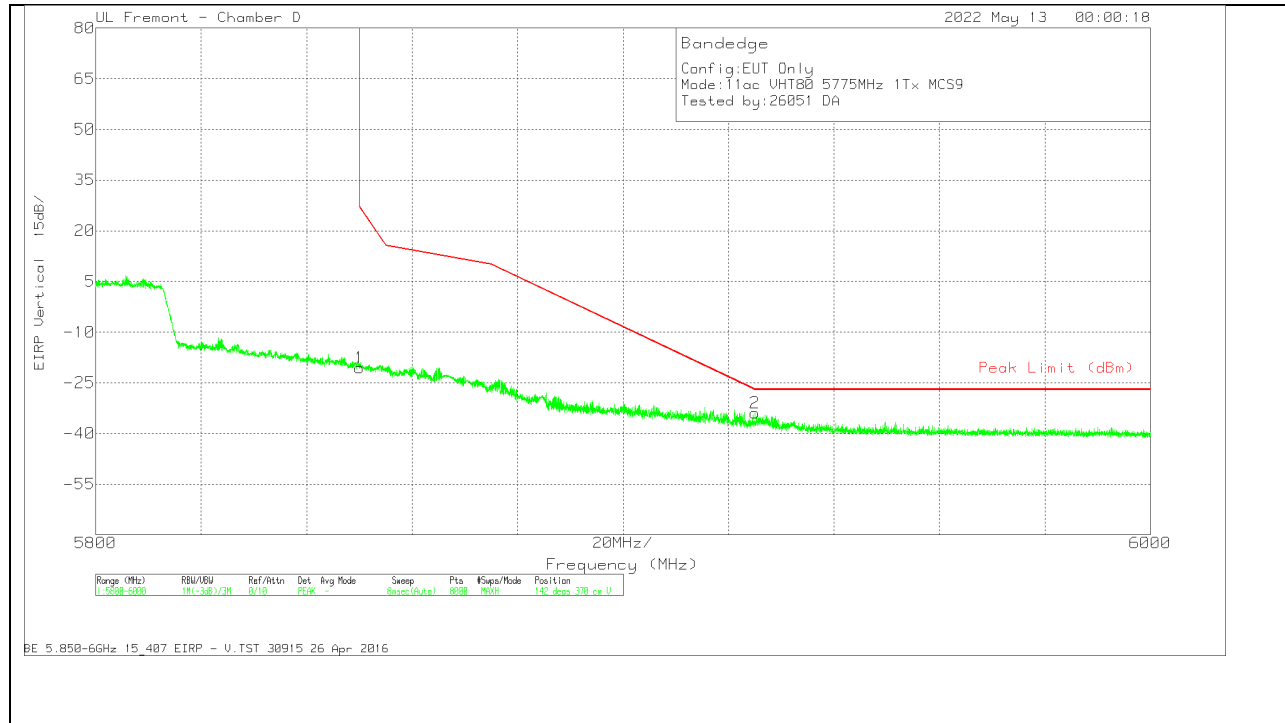


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Fitr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-49.51	Pk	35	-17.8	11.8	0	-20.51	27	-47.51	142	370	V
2	5925.015	-63.33	Pk	35.1	-17.5	11.8	0	-33.93	-27	-6.93	142	370	V

Pk - Peak detector

1TX Antenna 5

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

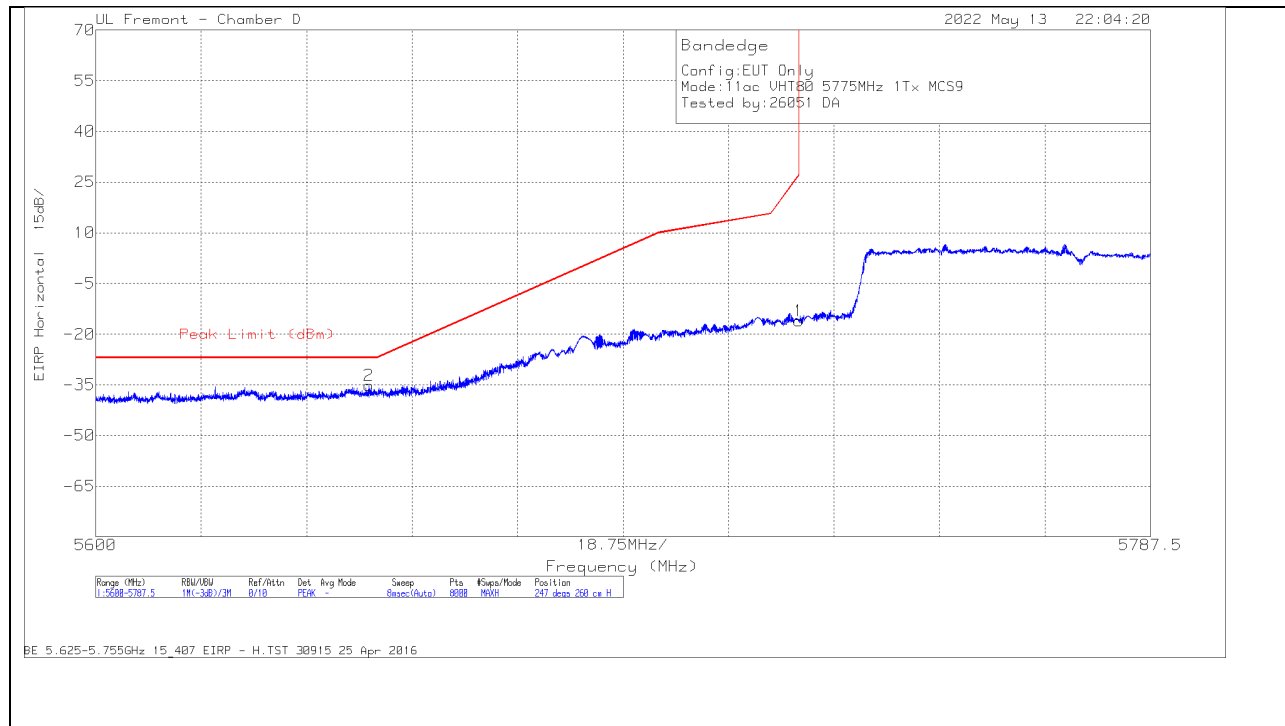

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5648.521	-64.05	Pk	34.6	-17.6	11.8	0	-35.25	-27	-8.25	247	260	H
1	5725	-44.77	Pk	34.7	-17.8	11.8	0	-16.07	27	-43.07	247	260	H

Pk - Peak detector

VERTICAL RESULT

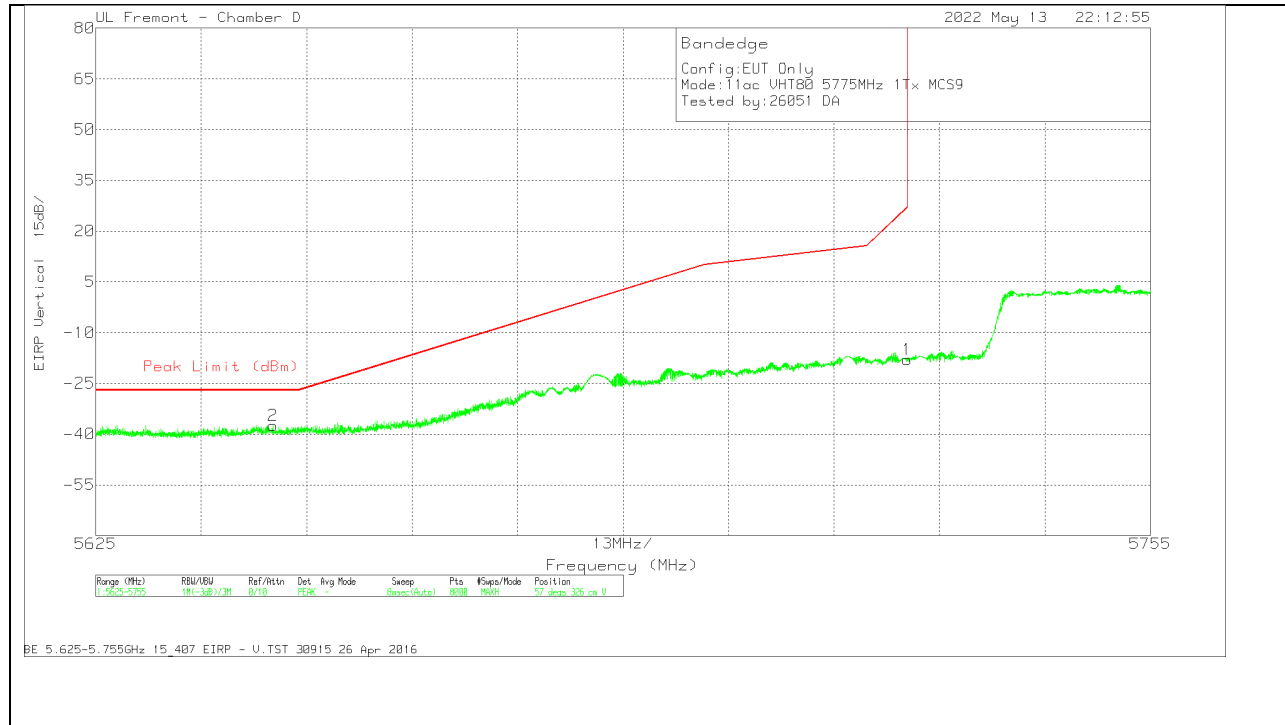


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5646.826	-66.18	Pk	34.6	-17.6	11.8	0	-37.38	-27	-10.38	57	326	V
1	5725	-46.71	Pk	34.7	-17.8	11.8	0	-18.01	27	-45.01	57	326	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

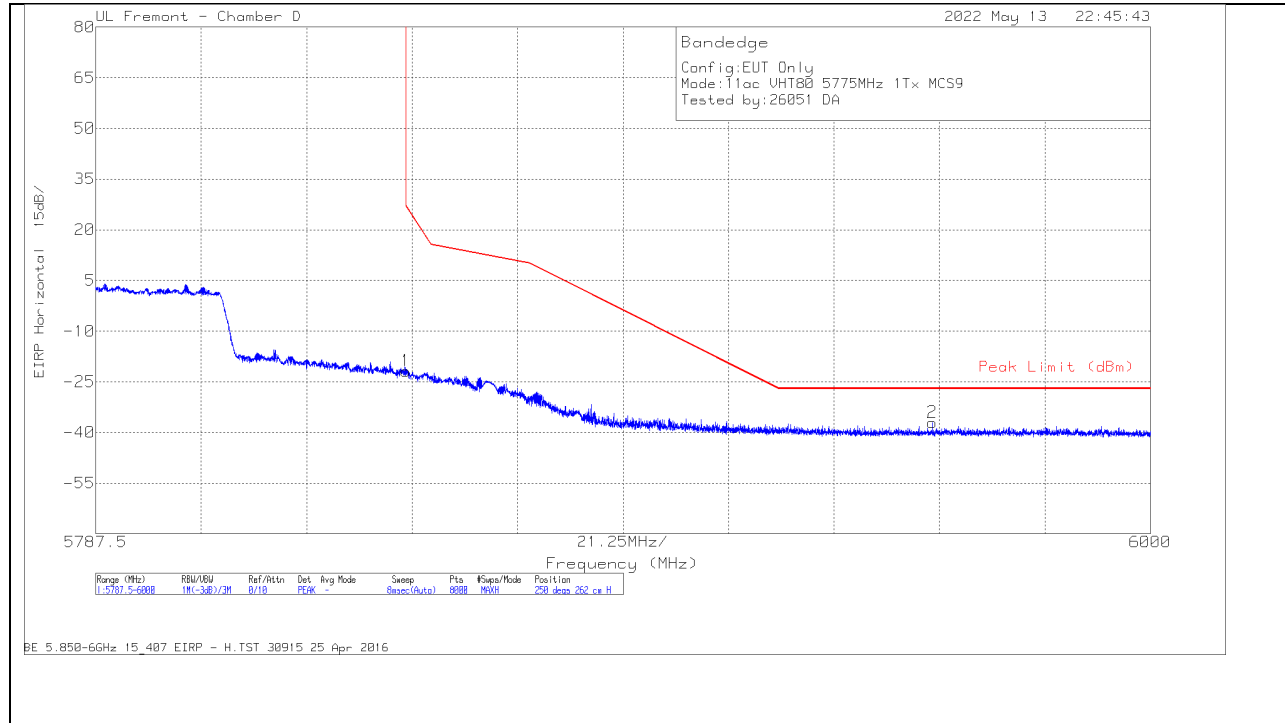

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-50.76	Pk	35	-17.8	11.8	0	-21.76	27	-48.76	250	262	H
2	5956.088	-66.28	Pk	35.2	-17.7	11.8	0	-36.98	-27	-9.98	250	262	H

Pk - Peak detector

VERTICAL RESULT

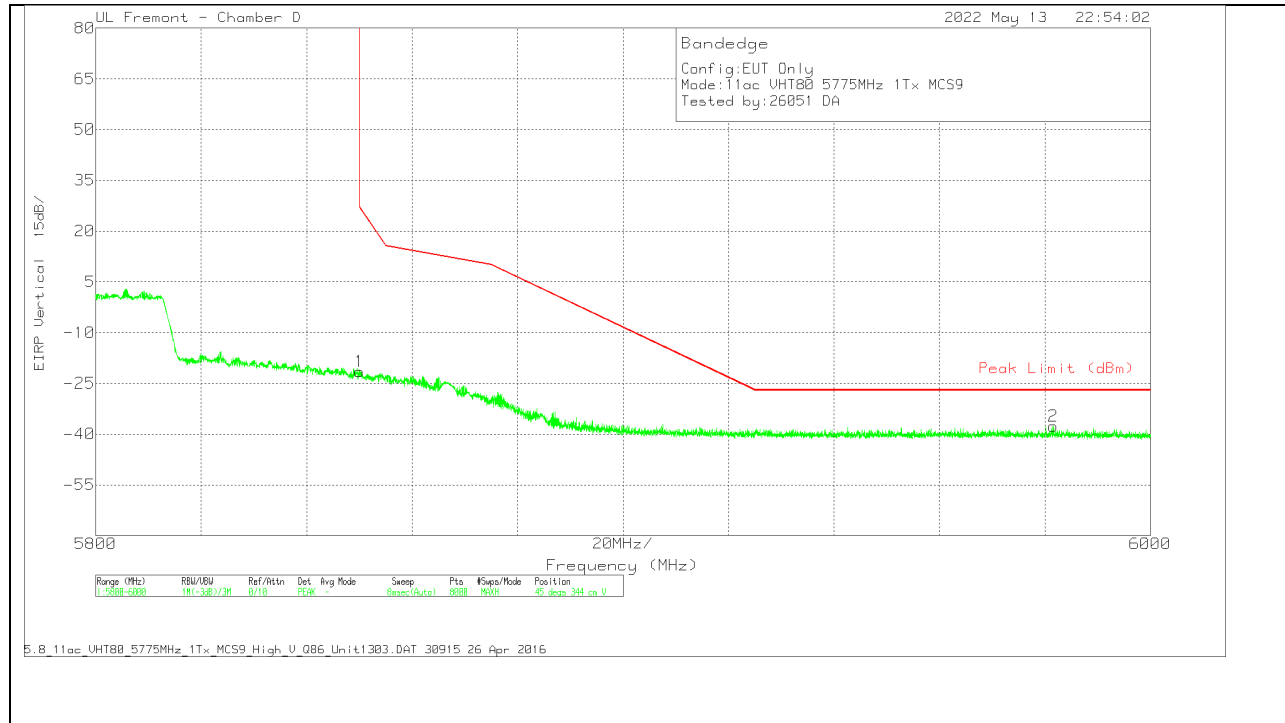


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	200786 ACF (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-50.4	Pk	35	-17.8	11.8	0	-21.4	27	-48.4	45	344	V
2	5981.522	-67.26	Pk	35.3	-17.4	11.8	0	-37.56	-27	-10.56	45	344	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 CDD

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

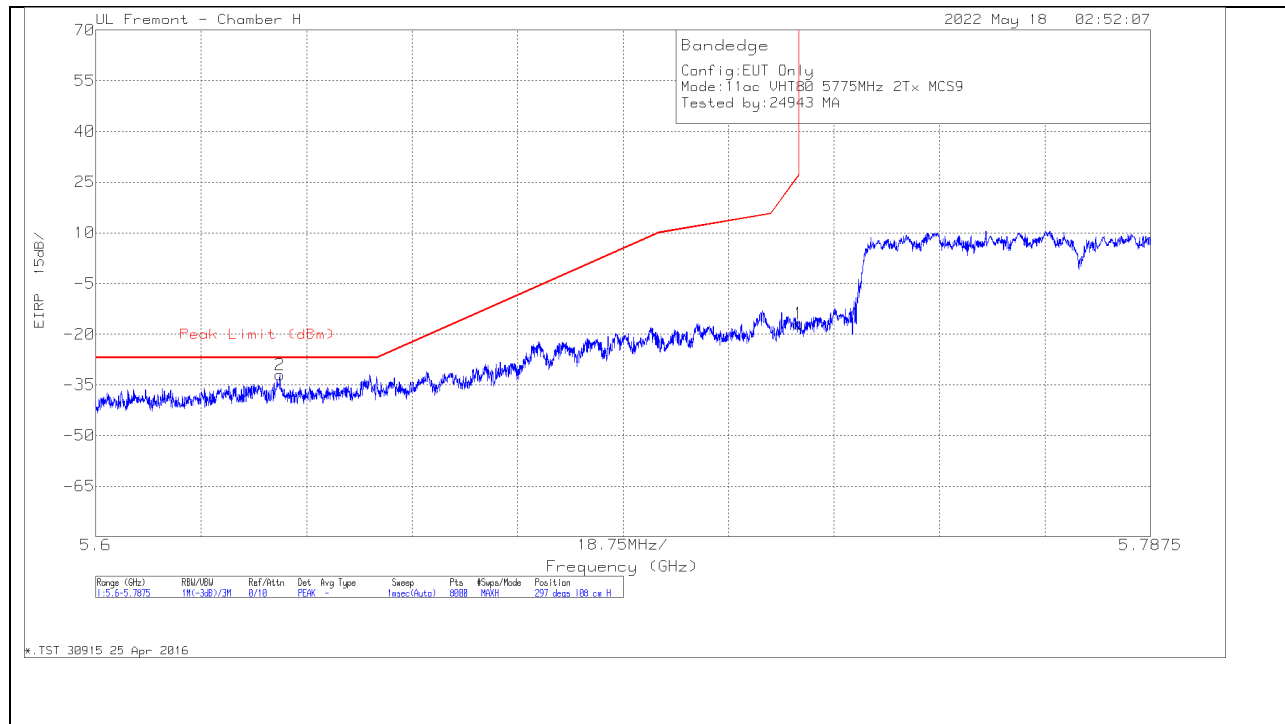

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80430 (dB/m)	Amp/Cbl /Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.632722	-56.11	Pk	34.9	-22.6	11.8	0	-32.01	-27	-5.01	297	108	H
1	5.725	-41.01	Pk	34.9	-22.6	11.8	0	-16.91	27	-43.91	297	108	H

Pk - Peak detector

VERTICAL RESULT

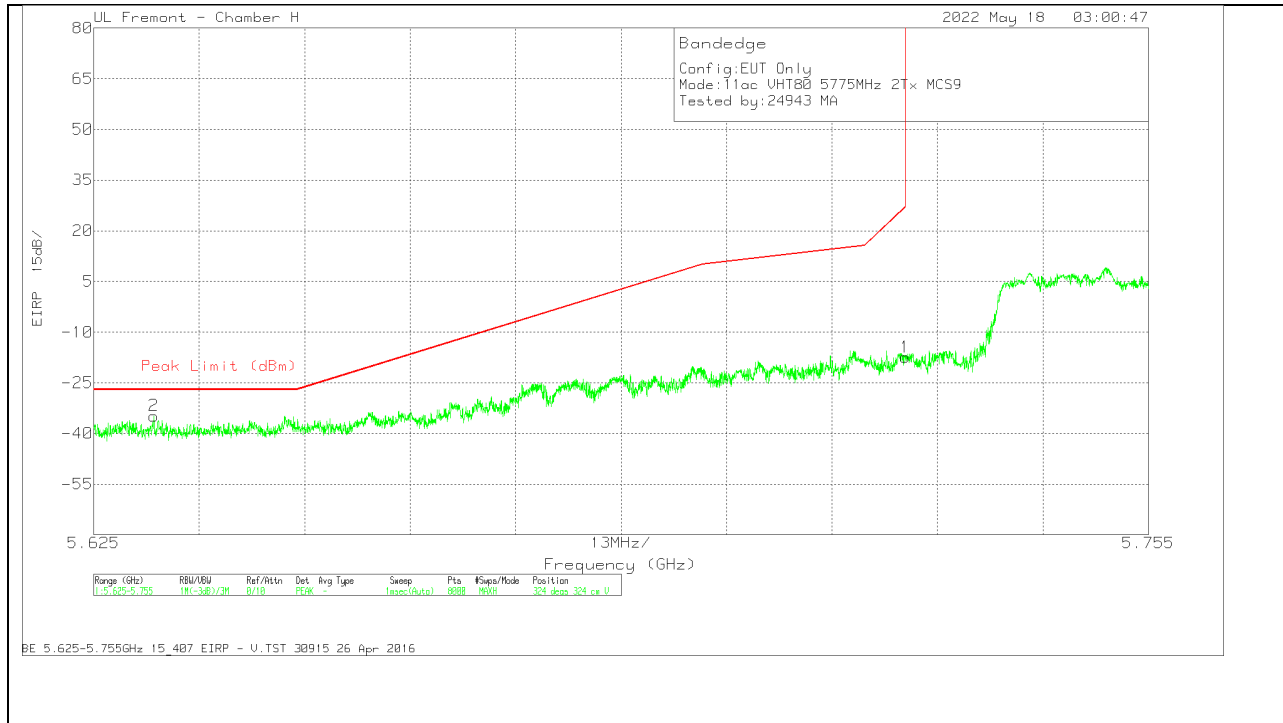


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80430 (dB/m)	Amp/Cbl /Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.632411	-58.85	Pk	34.9	-22.6	11.8	0	-34.75	-27	-7.75	324	324	V
1	5.725	-41.56	Pk	34.9	-22.6	11.8	0	-17.46	27	-44.46	324	324	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT

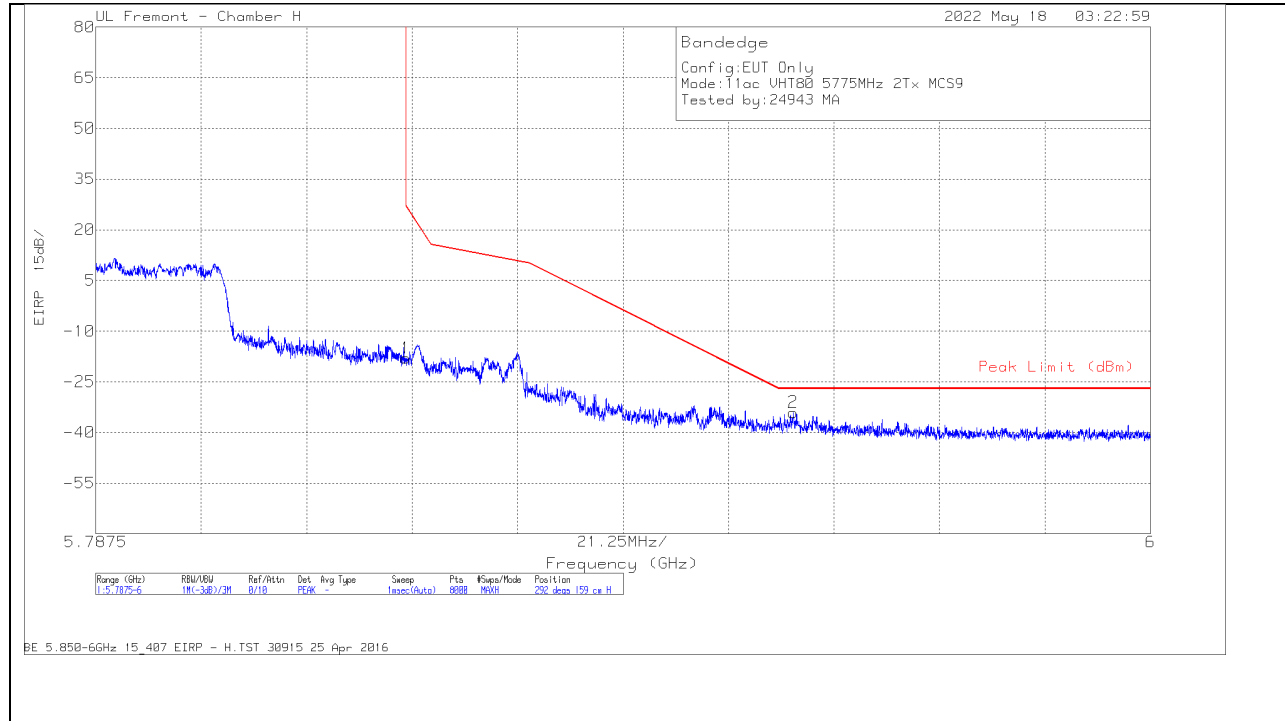

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80430 (dB/m)	Amp/Cbl /Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.73	Pk	35.3	-22.4	11.8	0	-18.03	27	-45.03	292	159	H
2	5.928034	-58.71	Pk	35.4	-22.5	11.8	0	-34.01	-27	-7.01	292	159	H

Pk - Peak detector

VERTICAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF 80430 (dB/m)	Amp/Cbl /Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.22	Pk	35.3	-22.4	11.8	0	-17.52	27	-44.52	329	341	V
2	5.930491	-59.03	Pk	35.4	-22.5	11.8	0	-34.33	-27	-7.33	329	341	V

Pk - Peak detector