

TEST REPORT

Report Number : 14523778-E19V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95104, U.S.A.

Model : A2847 (Parent Model)
A3093, A3094 (Variant Models)

Brand : APPLE

FCC ID : BCG-E8431A (Parent Model)
BCG-E8432A, BCG-E8433A (Variant Models)

IC : 579C-E8431A (Parent model)
579C-E8432A, 579C-E8433A (Variant Models)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR Part 25
ISED RSS-170 ISSUE 4

Date Of Issue:
AUGUST 24, 2023

Prepared by:
UL VEIFICATION SERVICES INC.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History



<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	8/1/2023	Initial Review	--
V2	8/24/2023	Address TCB Question rule parts	Chris Xiong

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. SUMMARY OF TEST RESULTS.....	6
3. TEST METHODOLOGY	6
4. FACILITIES AND ACCREDITATION	6
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
5.1. METROLOGICAL TRACEABILITY	7
5.2. DECISION RULES.....	7
5.3. MEASUREMENT UNCERTAINTY.....	7
5.4. SAMPLE CALCULATION	7
6. EQUIPMENT UNDER TEST.....	8
6.1. DESCRIPTION OF EUT	8
6.2. MAXIMUM OUTPUT POWER.....	8
6.3. SOFTWARE AND FIRMWARE.....	9
6.4. MAXIMUM ANTENNA GAIN.....	9
6.5. WORST-CASE CONFIGURATION AND MODE.....	9
6.6. DESCRIPTION OF TEST SETUP.....	10
7. TEST AND MEASUREMENT EQUIPMENT	13
8. RF OUTPUT POWER VERIFICATION	14
9. CONDUCTED TEST RESULTS	15
9.1. OCCUPIED BANDWIDTH	15
9.2. EMISSIONS MASK WITHIN 250% OF AUTHORIZED BANDWIDTH	17
9.2.1. ANT 1	18
9.2.2. ANT 4	21
9.3. OUT OF BAND EMISSIONS.....	22
9.3.1. ANT 1	23
10. RADIATED TEST RESULTS	24
10.1. FIELD STRENGTH OF SPURIOUS RADIATION	25
10.1.1. ANT 1 (Above 1GHz)	26
10.1.2. ANT 4 (Above 1GHz)	28
10.1.3. ANT 1 (Below 1GHz).....	30
10.1.4. ANT 4 (Below 1GHz).....	32
10.2. ADDITIONAL UNWANTED EMISSION (1559MHz – 1610MHz).....	34
10.2.1. ANT 1.....	36
10.2.2. ANT 4.....	42

10.3.	CARRIER-OFF STATE EMISSIONS (1559MHz – 1610MHz)	47
10.3.1.	ANT 1	48
10.3.2.	ANT 4	48
10.4.	FREQUENCY STABILITY	49
11.	SETUP PHOTOS	50

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE INC. 1 APPLE PARK WAY CUPERTINO, CA 95104, U.S.A.	
Model	A2847 (Parent Model, Full Test) A3093, A3094 (Variant Models)	
Brand	APPLE	
FCC ID	BCG-E8431A (Parent Model) BCG-E8432A, BCG-E8433A (Variant Models)	
IC	579C-E8431A (Parent model) 579C-E8432A, 579C-E8433A (Variant Models)	
EUT Description	SMARTPHONE	
Serial Number	T7VH2QHV76, HVGGRJ0002K00004CC	
Sample Receipt Date	MARCH 02, 2023	
Date Tested	to JULY 01, 2023	
Applicable Standards	FCC 47 CFR PART 25 ISED RSS-170 ISSUE 4	
Test Results	COMPLIES	
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.</p> <p>This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.</p>		
Approved & Released By:	Prepared & Reviewed By:	
		
Thu Chan Staff Engineer UL Verification Services, Inc.	Chris Xiong Senior Test Engineer UL Verification Services, Inc.	

2. SUMMARY OF TEST RESULTS

This report contains data provided by the customer which can impact the validity of results. UL Verification Services, Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

Below is a list of data provided by the customer:

1. Antenna gain and type (see Section 6.4)
2. Cable loss (see Section 8)

Requirement Description	Requirement Clause Number (FCC)	Requirement Clause Number (ISED)	Result	Remarks
RF Output Power Verification	25.204 (a)	RSS-170 §5.5	Complies	N/A
Occupied Bandwidth	2.1049	RSS-170 RSS-GEN	Reporting purposes only	N/A
Emissions Mask - within 250% of Authorized Bandwidth	25.202 (f)(1)&(2)	RSS-170 §5.8	Complies	N/A
Out of Band Emissions	25.202 (f)(3)	RSS-170 §5.8	Complies	N/A
Additional Unwanted Emission (1559-1610MHz)	25.216 (c)&(g) FCC 03-283	RSS-170 §5.9.1	Complies	N/A
Carrier-Off State Emissions (1559-1610MHz)	25.216 (i) FCC 03-283	RSS-170 §5.10	Complies	N/A
Frequency Stability	25.202 (d)	RSS-170 §5.3	Complies	N/A

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- ISED RSS-170 ISSUE 4
- FCC 47 CFR Part 2 and 25
- [FCC KDB 971168 D01 v03r01](#): Power Meas License Digital Systems
- [FCC KDB 971168 D02 v02r02](#): Misc Rev Approv License Devices
- [FCC KDB 412172 D01 v01r01](#). Determining ERP and EIRP

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input checked="" type="checkbox"/>	Building 1: 47173 Benicia Street, Fremont, CA 94538 USA	US0104	2324A	550739
<input checked="" type="checkbox"/>	Building 2: 47266 Benicia Street, Fremont, CA 94538 USA			
<input checked="" type="checkbox"/>	Building 3: 843 Auburn Court, Fremont, CA 94538 USA			
<input checked="" type="checkbox"/>	Building 4: 47658 Kato Rd, Fremont, CA 94538 USA			
<input type="checkbox"/>	Building 5: 47670 Kato Rd, Fremont, CA 94538 USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB
Occupied Channel Bandwidth	±1.22 %
Temperature	±0.57 °C
Supply voltages	±0.57 %
Time	±3.39 %

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\begin{aligned}
 &\text{Field Strength (dBuV/m)} \\
 &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\
 &= 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}
 \end{aligned}$$

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G NR1, 5G NR2, IEEE 802.11a/b/g/n/ac/ax, Bluetooth (BT), Ultra-Wideband (UWB), GPS, NFC, 802.15.4ab-NB and MSS technologies. The rechargeable battery is not user accessible.

Testing was performed on the parent model and is used to support the application for the parent and variants identified in this report based on the test plan submitted and approved via KDB inquiry by the FCC and by ISED-Canada.

Parent Model: A2847, FCC ID: BCG-E8431A, IC: 579C-E8431A

Variant Models: A3093, FCC ID: BCG-E8432A, IC: 579C-E8432A
 A3094, FCC ID: BCG-E8433A, IC: 579C-E8433A

6.2. MAXIMUM OUTPUT POWER

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015
 KDB 971168 D01 Section 5.6

$$\text{EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: EIRP = effective isotropic radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average conducted and EIRP output powers as follows:

FCC Part 25 & ISED RSS-170 (1610 - 1626.5MHz):

Frequency (MHz)	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
				(dBm)	(W)		
1610.17	27.90	-2.1	10000	25.80	0.380	206.30	206KG1D
1618.40	28.00		10000	25.90	0.389	206.07	206KG1D
1626.03	28.00		10000	25.90	0.389	206.93	207KG1D

6.3. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.13.02.

6.4. MAXIMUM ANTENNA GAIN

Antenna Type is IFA.

The antennas' gains, as provided by the manufacturer, are as follows:

Frequency Range (MHz)	ANT 1 Antenna Gain (dBi)	ANT 4 Antenna Gain (dBi)
1610-1626.5	-2.1	-0.6

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X/Y/Z on both ANT 1 and ANT 4 antennas. It was determined that X (Flatbed) orientation was the worst-case orientation with AC/DC adapter for both ANT 1 and ANT 4.

The emissions mask tests were performed based on declared authorized bandwidths of 200kHz, 230kHz and 280kHz.

Conducted spurious emissions tests were performed on the worst case antenna port because it has the highest conducted power.

Radiated spurious emissions below 1GHz were performed with the highest output power on both ANT 1 and ANT 4 as worst-case scenario.


Radiated spurious emissions below 30MHz were investigated and there were no emissions found with less than 20dB of margin below the specified emissions limits.

For simultaneous transmission of multiple channels in the 2.4GHz/5GHz WLAN, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.


6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description	Manufacturer	Model	Serial Number	FCC ID/ DoC		
Laptop	Apple	MacBook Pro	C02WG84CHV2L	DoC		
Laptop AC/DC Adapter	Apple	61W Model A1947	C02VR00VJLM5	DoC		
Laptop	Apple	MacBook Pro	C02VT1RBHV29	DoC		
Laptop AC/DC Adapter	Apple	B920	N/A	DoC		
EUT AC/DC Adapter	Apple	B820	C4H95130051PF4F4L	DoC		
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# Of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	Type-C	Shielded	2.0	N/A
3	RF In/Out	1	SMA	Shielded	1.0	N/A
4	RF In/Out	1	SMA	Shielded	0.5	N/A
5	RF In/Out	1	SMA Adapter	N/A	N/A	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# Of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	Type-C	Un-shielded	1.0	N/A


CONDUCTED SETUP - ANT 1

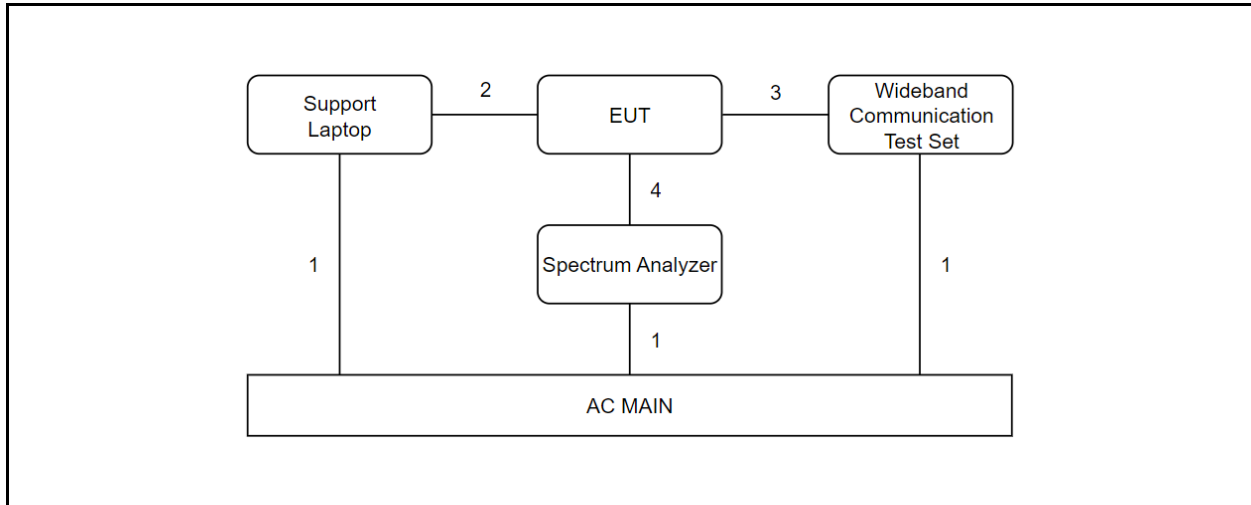

CONDUCTED SETUP - ANT 4

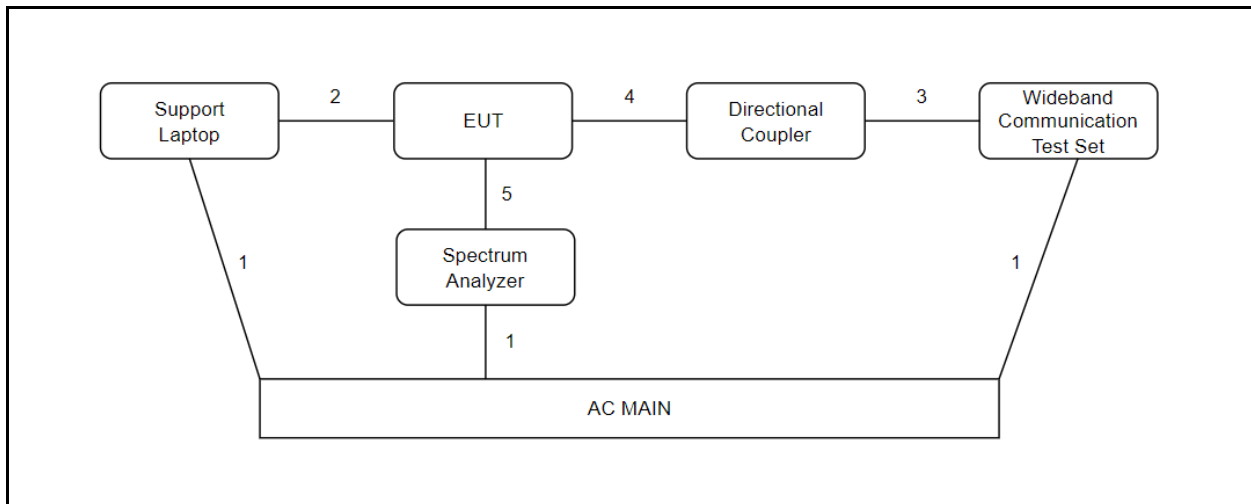

RADIATED SETUP

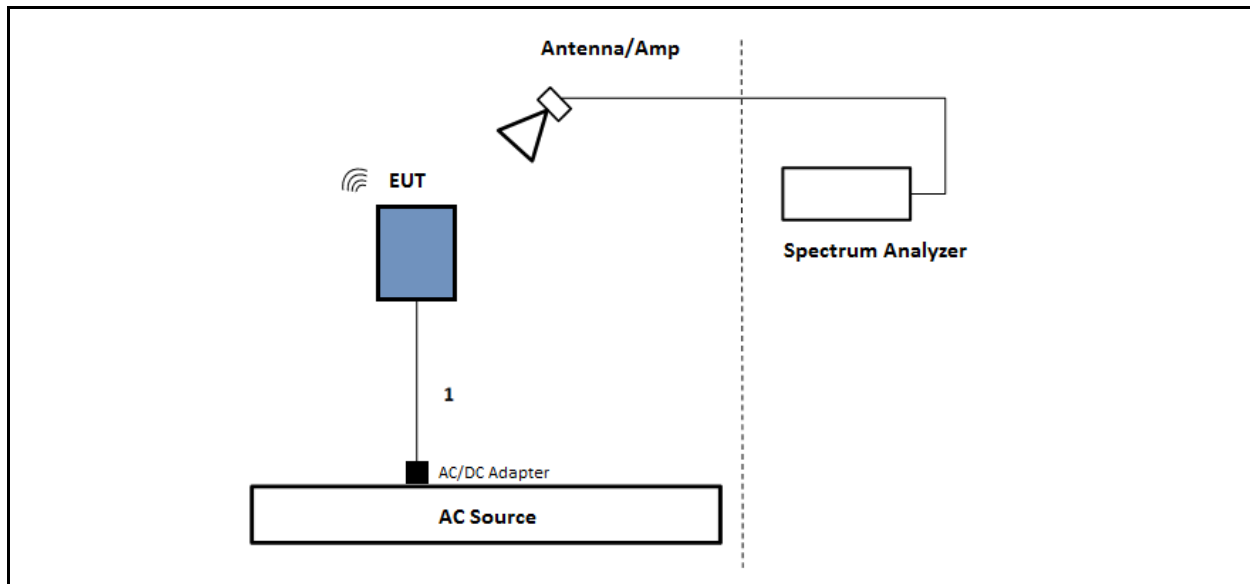

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	85212	02/29/2024
RF Filter Box, 1-18GHz	UL-FR1	NA	168534	01/05/2024
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	226672	01/09/2024
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	235670	04/30/2024
RF Filter Box, 1-18GHz, 17 Ports	UL-FR1	RATS 2	225079	10/31/2023
Antenna, Broad Band Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	232076	03/31/2024
Amplifier, 100KHz to 1GHz, 32dB	Keysight Technologies Inc	8447D	80670	08/10/2023
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	170014	07/19/2023
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO-METRICS	EM-6872	170016	07/19/2023
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	85201	02/29/2024
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200786	03/31/2024
RF Filter Box, 1-18GHz	UL-FR1	NA	168535	02/01/2024
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	81188	01/31/2024
Directional Coupler	KRYTAR	152610	231740	02/29/2024
Wideband Communication Test Set, Call Box	Rohde & Schwarz	CMW500	10763796	08/04/2023
Environmental Chamber	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	89097	06/08/2024
UL AUTOMATION SOFTWARE				
Radiated test software	UL	UL RF	Ver 9.5 February 2, 2021	

8. RF OUTPUT POWER VERIFICATION

LIMITS

FCC: §25.204

(a) In bands shared coequally with terrestrial radio communication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station, other than an ESV, operating in frequency bands between 1 and 15 GHz, shall not exceed the following limits except as provided for in paragraph (c) of this section:

+ 40 dBW in any 4 kHz band for $\theta \leq 0^\circ$

+ 40 + 3 θ dBW in any 4 kHz band for $0^\circ < \theta \leq 5^\circ$

where θ is the angle of elevation of the horizon viewed from the center of radiation of the antenna of the earth station and measured in degrees as positive above the horizontal plane and negative below it.

ISED RSS-170:

5.5 Mobile Earth Stations (MESs)

The application for MES certification shall state the MES e.i.r.p. that is necessary for satisfactory communication. The maximum permissible e.i.r.p. will be the stated e.i.r.p. plus a 2 dB margin. If a detachable antenna is used, the certification application shall state the recommended antenna type and manufacturer, the antenna gain and the maximum transmitter output power at the antenna terminal.

TEST PROCEDURE

The transmitter output is connected to a wideband power meter/sensor which is greater than the occupied bandwidth as worst-case scenario, also the total power readings still comply with the required limit.

The cable assembly insertion loss of 13.25 dB (ANT 1) / 12.10 dB (ANT 4) (including 10.90 dB coupler and 2.35dB cable (ANT 1) / 10 dB pad and 2.10 dB cable (ANT 4)) was entered as an offset in the power meter to allow for a gated average reading of power.

RESULTS

Test Engineer ID:	26118	Test Date:	3/7/23
--------------------------	-------	-------------------	--------

Test Frequency (MHz)	Conducted Average Power (dBm)		Antenna Gain (dBi)		EIRP Average Power (dBm)	
	ANT 1	ANT 4	ANT 1	ANT 4	ANT 1	ANT 4
1610.17	27.90	25.80	-2.1	-0.6	25.8	25.2
1618.40	28.00	25.80			25.9	25.2
1626.03	28.00	25.80			25.9	25.2

9. CONDUCTED TEST RESULTS

9.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049
ISED RSS-170 and RSS-GEN

LIMITS

For reporting purposes only.

TEST PROCEDURE




The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW. The 99% bandwidths were measured and recorded.

RESULTS

There is no limit required; therefore, only one port of higher power, ANT1, was tested.

Test Engineer ID:	26118	Test Date:	3/9/23
--------------------------	-------	-------------------	--------

Test Frequency (MHz)	99% BW (kHz)
1610.17	206.30
1618.40	206.07
1626.03	206.93

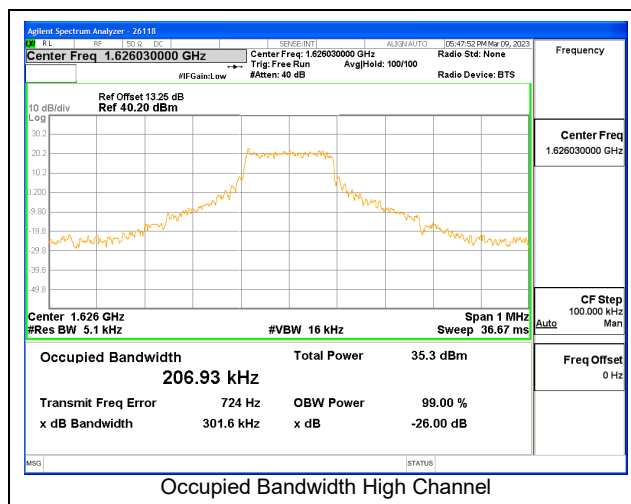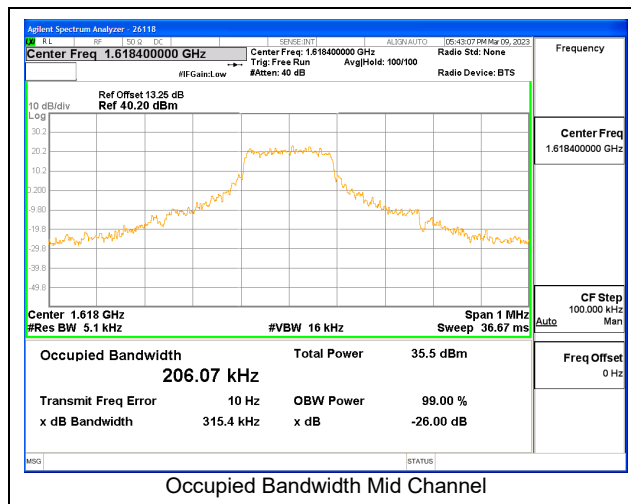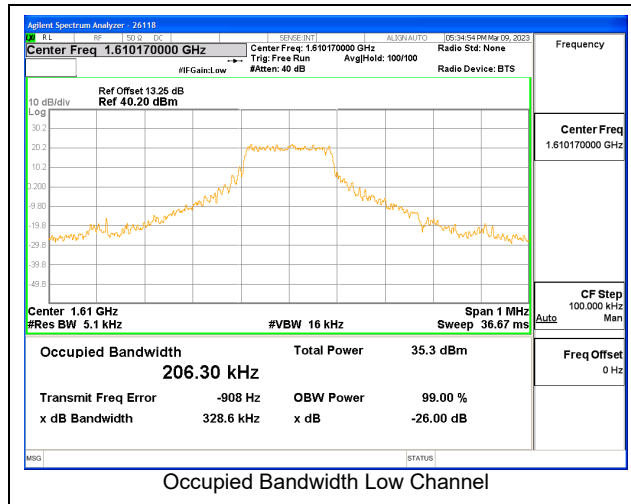

9.2. EMISSIONS MASK WITHIN 250% OF AUTHORIZED BANDWIDTH

LIMITS

FCC §25.202 and ISED RSS-170: 5.8

(f) Emission limitations. Except for SDARS terrestrial repeaters and as provided for in paragraph (i), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the schedule set forth in paragraphs (f)(1) through (f)(4) of this section. The out-of-band emissions of SDARS terrestrial repeaters shall be attenuated in accordance with the schedule set forth in paragraph (h) of this section.

(1) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: 25 dB;

(2) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: 35 dB;

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The channel edge emissions were measured on the low, mid and high channels. The limits within 250% of the authorized bandwidth are relative to the total in-band (channel) power. The measurement bandwidth (RBW) is set to $\geq 4\text{kHz}$ and VBW set to at least 3 times the RBW. To measure the average value of the emissions the detector is set to rms while observing the minimum required number of points as detailed in ANSI C63.26 for average rms measurements. The sweep time is set to 2ms multiplied by the number of points to obtain the average over 2ms. Multiple sweeps with max hold enabled are made to capture the maximum average value.


RESULTS

The tests were performed based on declared authorized bandwidths of 200kHz, 230kHz and 280kHz. The ANT 4 was performed only on center channel since it was the same signal to each antenna.




Test Engineer ID:	26118	Test Date:	3/8/23
--------------------------	-------	-------------------	--------

9.2.1. ANT 1




200kHz Authorized Bandwidth:

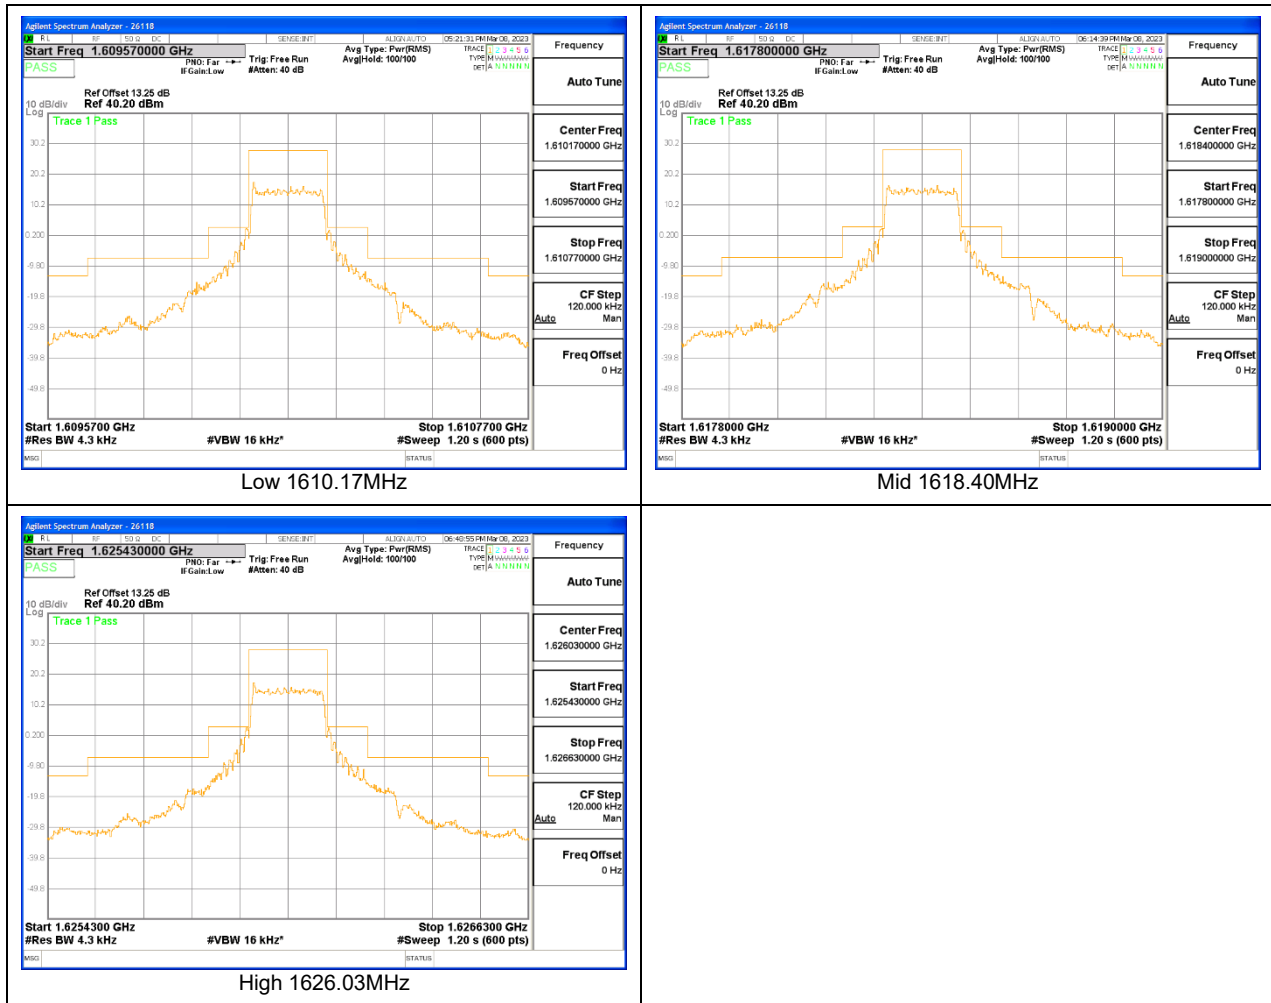

230kHz Authorized Bandwidth:

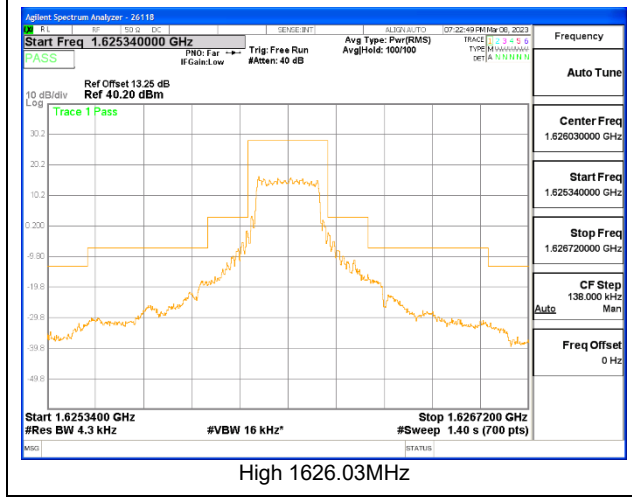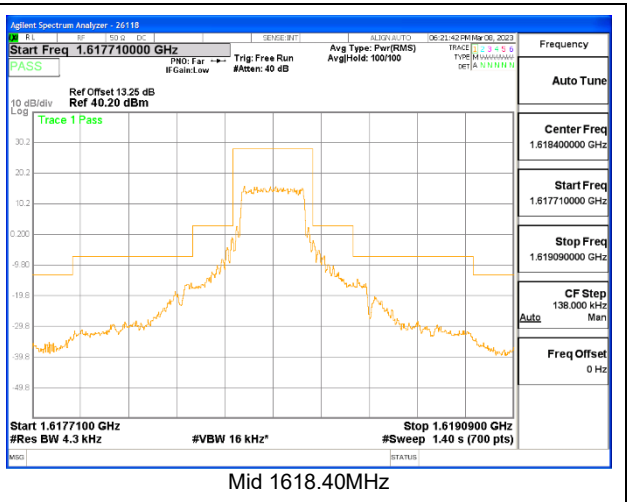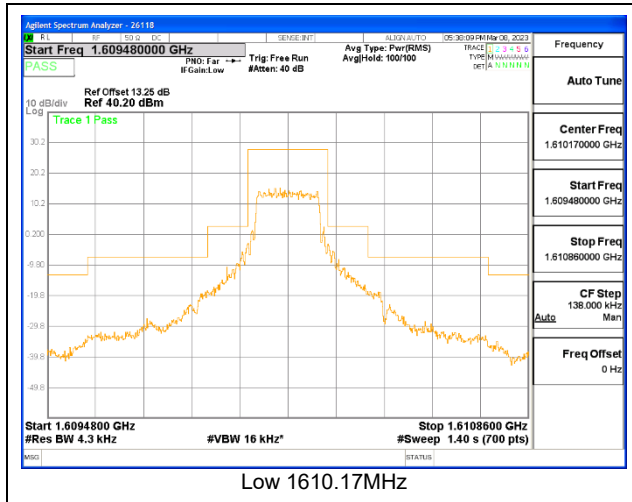


280kHz Authorized Bandwidth:

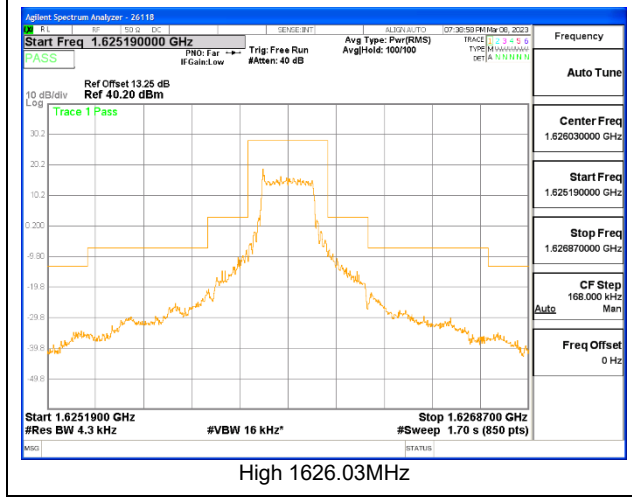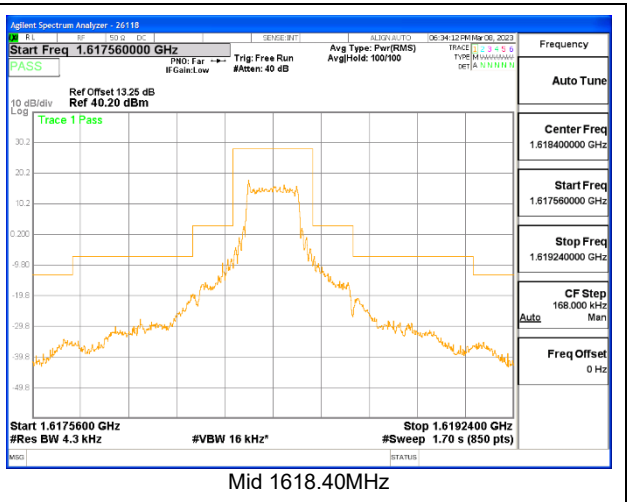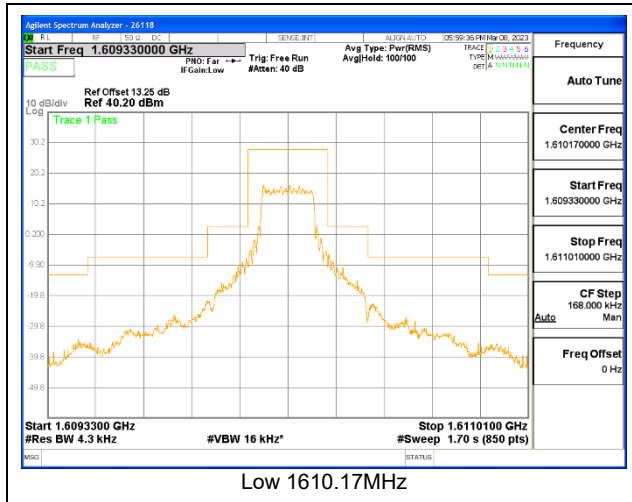


9.2.2. ANT 4


200kHz Authorized Bandwidth:

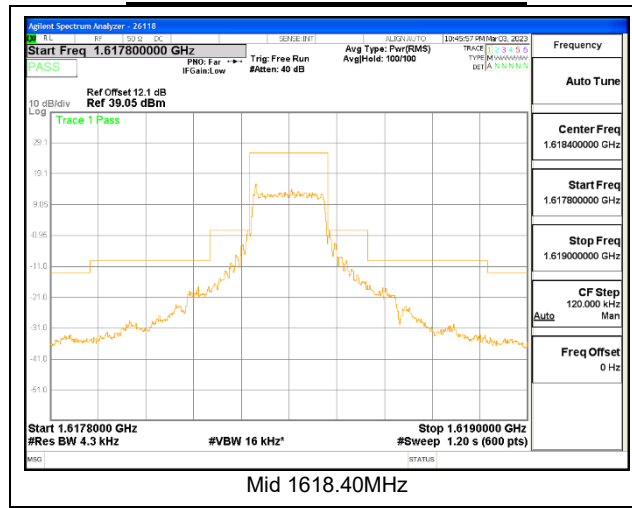

230kHz Authorized Bandwidth:

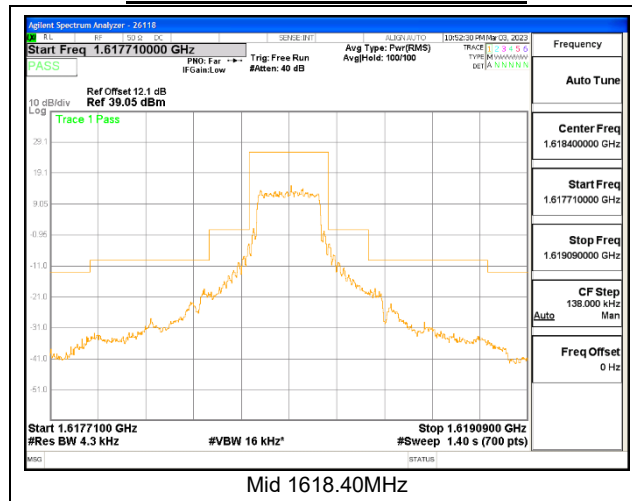

280kHz Authorized Bandwidth:

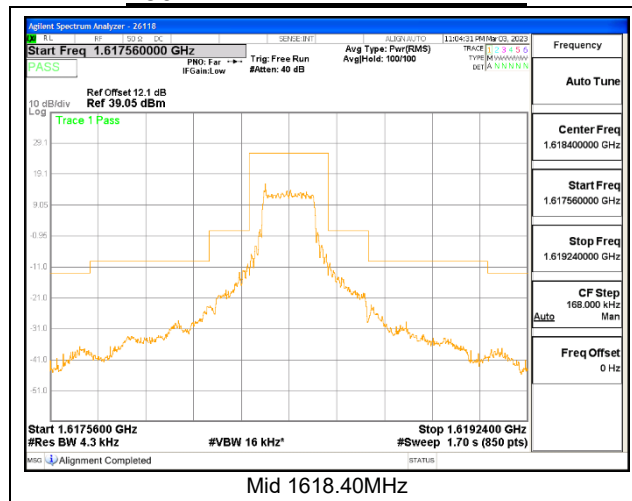

9.3. OUT OF BAND EMISSIONS

LIMITS

FCC §25.202 and ISED RSS-170: 5.8

(f) Emission limitations. Except for SDARS terrestrial repeaters and as provided for in paragraph (i), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the schedule set forth in paragraphs (f)(1) through (f)(4) of this section. The out-of-band emissions of SDARS terrestrial repeaters shall be attenuated in accordance with the schedule set forth in paragraph (h) of this section.

(3) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: An amount equal to 43 dB plus 10 times the logarithm (to the base 10) of the transmitter power in watts.

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02r02



For each out of band emissions measurement:

- Set display line at -13 dBm (the limit of $43 + 10\log(P)$)
- Set RBW $\geq 4\text{kHz}$ and VBW $\geq 3 \times \text{RBW}$ with peak detector for all measurements. The limit is an average limit so any emissions that exceed the limit using the peak detector are measured using rms detection with an averaging time of 2ms.

RESULTS

Test Engineer ID:	26118	Test Date:	3/8/23
--------------------------	-------	-------------------	--------

9.3.1. ANT 1

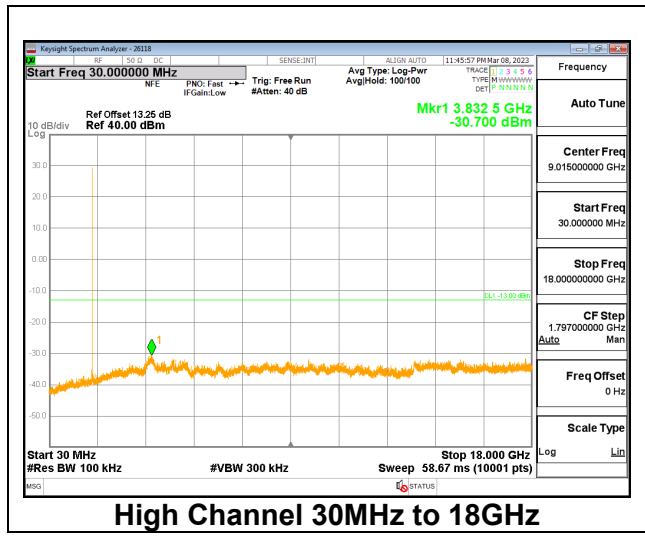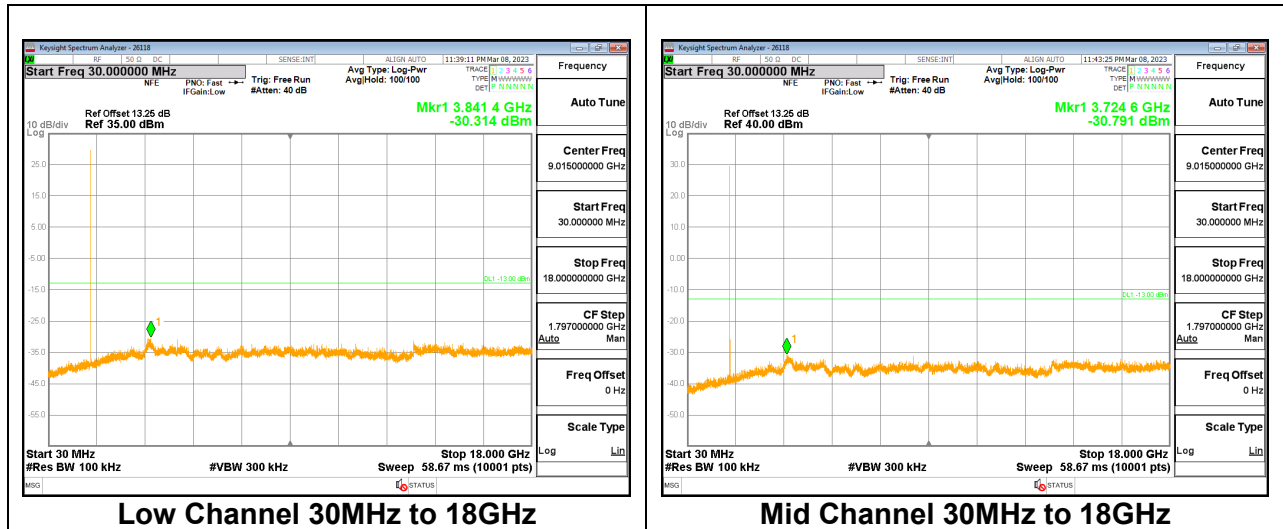

10. RADIATED TEST RESULTS

Radiated measurement using the Field Strength Method

Using the test configuration shown in Figure 6 below, we measure the radiated emissions directly from the EUT and convert the measured field strength or received power to EIRP, as required, for comparison to the applicable limits. As stated in 5.5.1 of ANSI C63.26-2015, the field strength measurement method using a test site validated to the requirements of ANSI C63.4 is an alternative to the substitution measurement method.

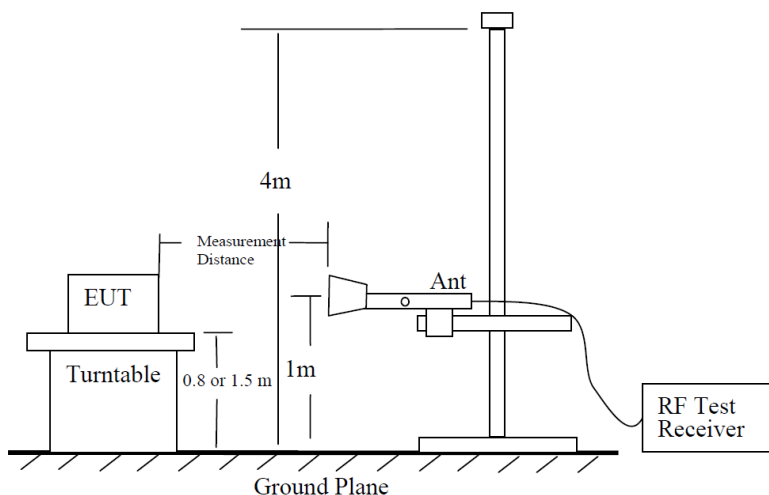


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

Radiated Power Measurement Calculation According to ANSI C63.26-2015

- a) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$.
- b) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$.
- c) $E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20\log(D) + 104.8$; where D is the measurement distance (in the far field region) in m.
- d) $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.

So, from d)

The measuring distance is usually at 3m, then $20 \cdot \log(3) = 9.5424$

Then, $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 9.5424 - 104.8 = E \text{ (dB}\mu\text{V/m)} - 95.2576$

10.1. FIELD STRENGTH OF SPURIOUS RADIATION

LIMITS

FCC §25.202 and ISED RSS-170: 5.8

(f) Emission limitations. Except for SDARS terrestrial repeaters and as provided for in paragraph (i), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the schedule set forth in paragraphs (f)(1) through (f)(4) of this section. The out-of-band emissions of SDARS terrestrial repeaters shall be attenuated in accordance with the schedule set forth in paragraph (h) of this section.

(3) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: An amount equal to 43 dB plus 10 times the logarithm (to the base 10) of the transmitter power in watts;

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02r02

For each out of band emissions measurement:

- Set display line at -13 dBm (the limit of $43 + 10\log(P)$)
- Set RWB ≥ 4 kHz and VBW $\geq 3 \times$ RBW with peak detector for all measurements. The limit is an average limit so any emissions that exceed the limit using the peak detector are measured using rms detection with an averaging time of 2ms.

RESULTS

Plots are provided for the center channel. Tabular data for all channels is presented.

10.1.1. ANT 1 (Above 1GHz)

Project #:	14523778
Date:	5/18/2023
Test Engineer:	32197
Configuration:	EUT + Charger
Mode:	TX
Chamber:	04-RDE-S

Low channel:

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200784 ACF (dB) 3mH	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	4830.249	58.41	Pk	34	-95.2	-47.91	-50.7	-13	-37.7	82	114	V
2	4830.47	62.73	Pk	34	-95.2	-47.89	-46.36	-13	-33.36	77	103	H
4	12058.775	53.17	Pk	38.6	-95.2	-41.63	-45.06	-13	-32.06	285	287	H
3	12060.056	52.23	Pk	38.6	-95.2	-41.69	-46.06	-13	-33.06	3	107	V
5	15884.55	51.28	Pk	40.5	-95.2	-41.09	-44.51	-13	-31.51	329	149	H
6	15884.593	52.44	Pk	40.5	-95.2	-41.09	-43.35	-13	-30.35	323	221	V

Pk - Peak detector

Mid Channel:

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200784 ACF (dB) 3mH	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	4855.254	67.97	Pk	33.9	-95.2	-47.43	-40.76	-13	-27.76	10	132	V
2	4855.319	67.83	Pk	33.9	-95.2	-47.43	-40.9	-13	-27.9	220	149	H
4	10766.943	54.64	Pk	37.9	-95.2	-43.81	-46.47	-13	-33.47	233	190	H
3	10767.635	54.31	Pk	37.9	-95.2	-43.82	-46.81	-13	-33.81	2	339	V
5	14759.666	53.02	Pk	40	-95.2	-41.16	-43.34	-13	-30.34	232	395	H
6	14761.07	52.73	Pk	40	-95.2	-41.15	-43.62	-13	-30.62	187	267	V



Pk - Peak detector

High Channel:

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200784 ACF (dB) 3mH	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3251.928	65.02	Pk	32.7	-95.2	-46.81	-44.29	-13	-31.29	87	190	H
2	3251.954	60.18	Pk	32.7	-95.2	-46.81	-49.13	-13	-36.13	200	337	V
4	4878.085	63.23	Pk	33.9	-95.2	-47.51	-45.58	-13	-32.58	134	101	H
3	4878.112	65.2	Pk	33.9	-95.2	-47.51	-43.61	-13	-30.61	134	122	V
5	10532.725	54.92	Pk	37.8	-95.2	-44.18	-46.66	-13	-33.66	353	369	H
6	10533.788	54.98	Pk	37.8	-95.2	-44.16	-46.58	-13	-33.58	14	216	V

Pk - Peak detector

Mid Channel:

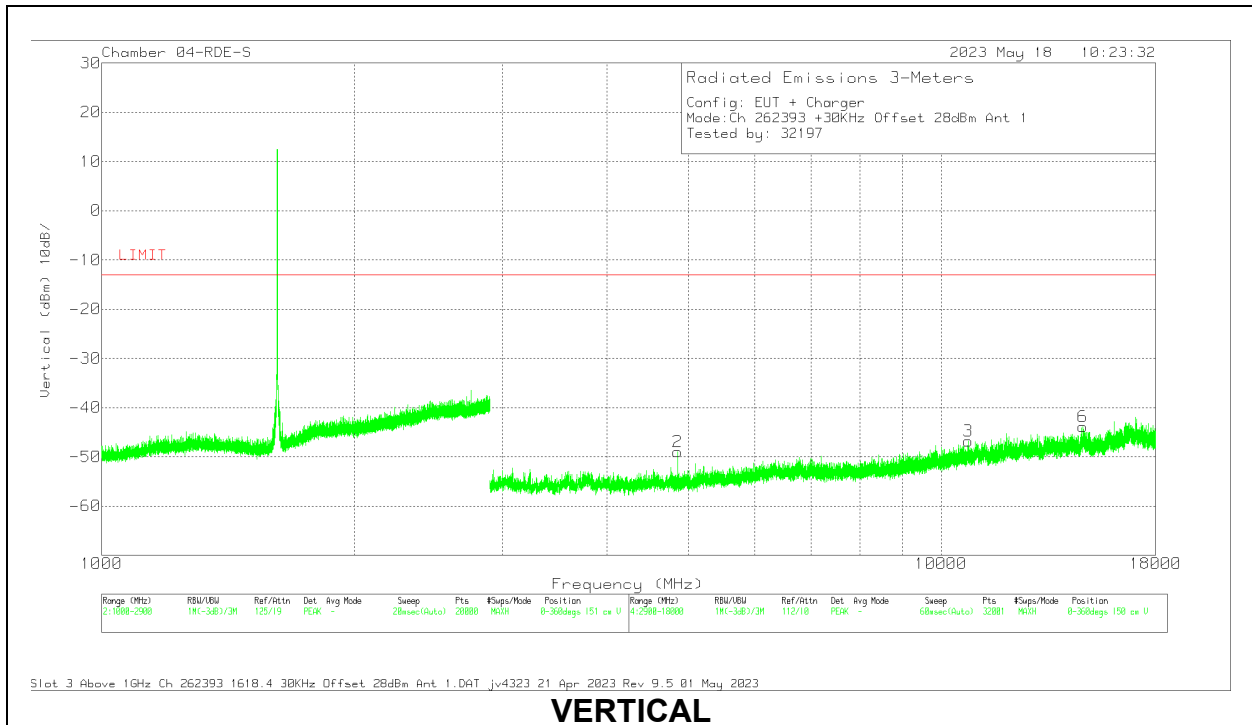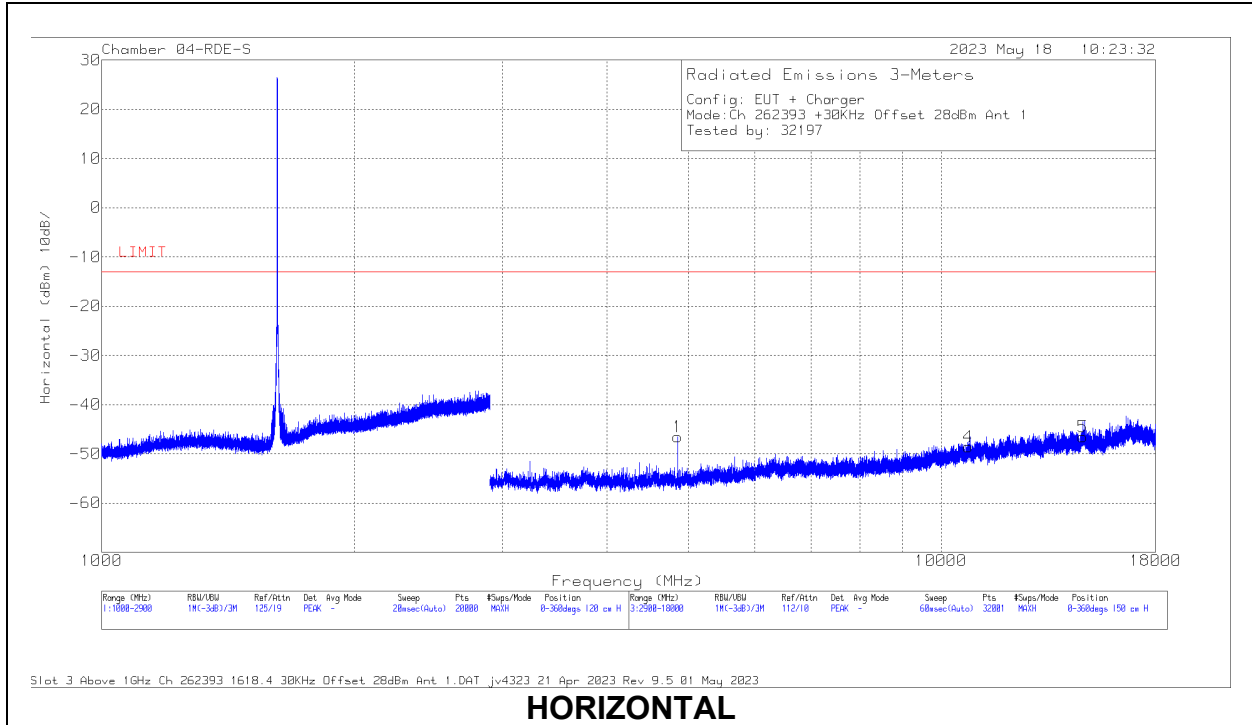

10.1.2. ANT 4 (Above 1GHz)

Project #:	14523778
Date:	5/18/2023
Test Engineer:	32197
Configuration:	EUT + Charger
Mode:	TX
Chamber:	04-RDE-S

Low channel:

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200784 ACF (dB) 3mH	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	3368.268	56.62	Pk	32.7	-95.2	-46.52	-52.4	-13	-39.4	63	120	V
6	3371.973	56.64	Pk	32.8	-95.2	-46.62	-52.38	-13	-39.38	108	185	H
4	6320.523	54.42	Pk	35.6	-95.2	-44.32	-49.5	-13	-36.5	134	178	H
3	6322.919	54.03	Pk	35.6	-95.2	-44.31	-49.88	-13	-36.88	358	230	V
1	11266.037	53.57	Pk	37.9	-95.2	-42.15	-45.88	-13	-32.88	151	173	H
2	11266.447	54.36	Pk	37.9	-95.2	-42.15	-45.09	-13	-32.09	190	399	V

Pk - Peak detector

Mid Channel:

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200784 ACF (dB) 3mH	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5213.111	57.48	Pk	34.4	-95.2	-47.53	-50.85	-13	-37.85	227	396	H
2	5213.319	56.33	Pk	34.4	-95.2	-47.54	-52.01	-13	-39.01	152	317	V
3	6324.433	54.73	Pk	35.6	-95.2	-44.28	-49.15	-13	-36.15	226	245	H
4	6334.932	54	Pk	35.6	-95.2	-44.31	-49.91	-13	-36.91	81	169	V
6	13561.01	53.49	Pk	38.6	-95.2	-42.24	-45.35	-13	-32.35	341	368	V
5	13569.65	54.48	Pk	38.6	-95.2	-42.41	-44.53	-13	-31.53	2	373	H


Pk - Peak detector

High Channel:


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200784 ACF (dB) 3mH	EIRP CF	Gain/Loss (dB)	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	3967.129	56.34	Pk	33.4	-95.2	-46.99	-52.45	-13	-39.45	133	373	H
5	3971.582	57.14	Pk	33.4	-95.2	-47.01	-51.67	-13	-38.67	247	363	V
1	6975.415	55.91	Pk	35.6	-95.2	-45.05	-48.74	-13	-35.74	266	386	H
2	6978.217	55.37	Pk	35.6	-95.2	-45.02	-49.25	-13	-36.25	196	354	V
3	13260.291	52.05	Pk	38.8	-95.2	-41.83	-46.18	-13	-33.18	79	101	V
4	13260.63	53.35	Pk	38.8	-95.2	-41.82	-44.87	-13	-31.87	358	366	H

Pk - Peak detector

Mid Channel:

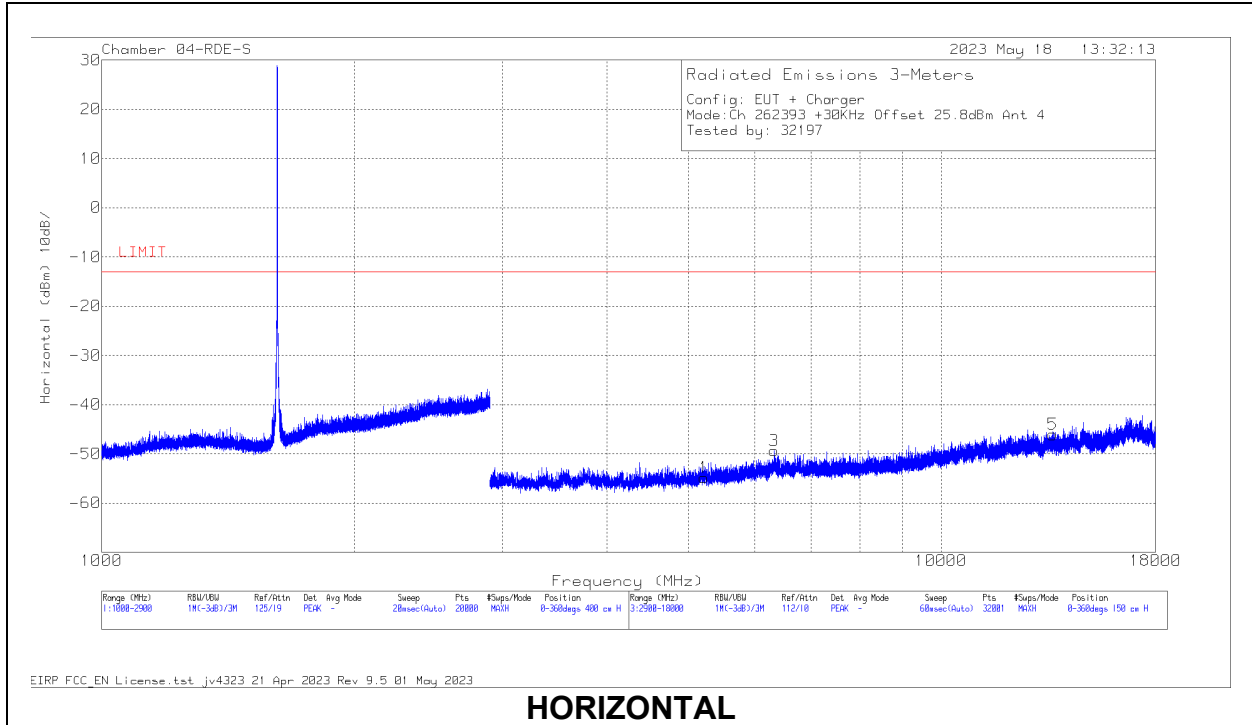



HORIZONTAL

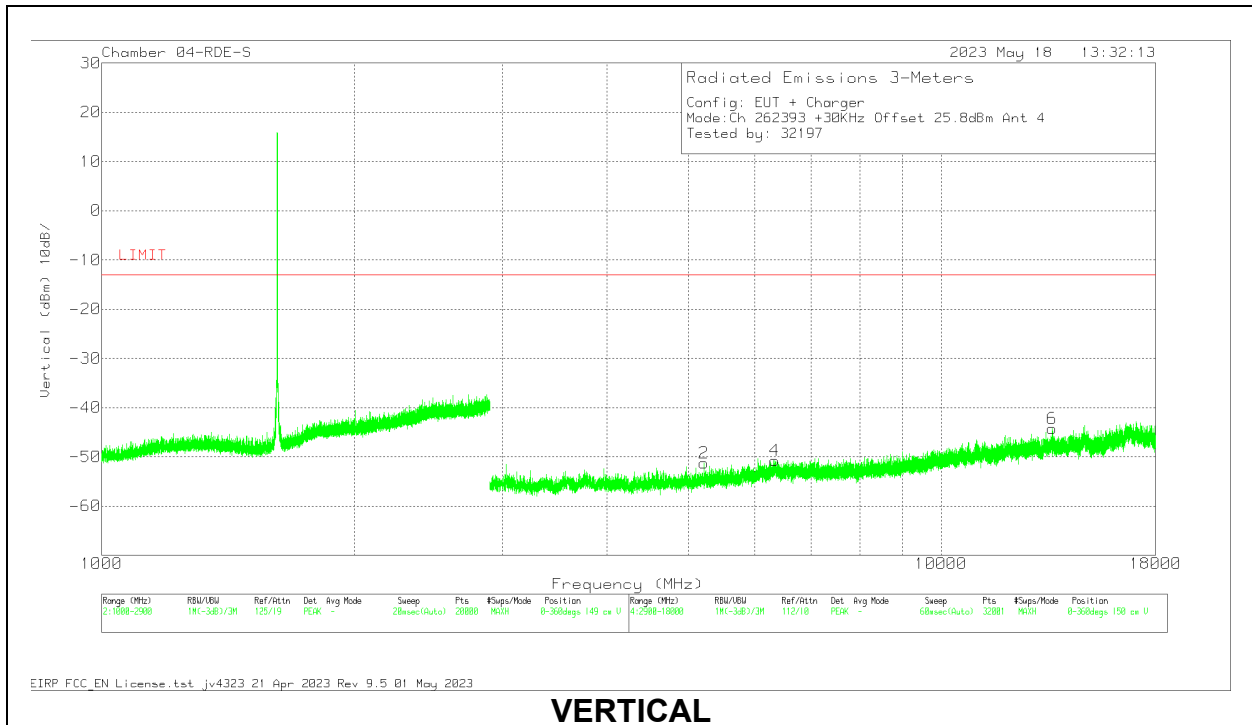

VERTICAL

10.1.3. ANT 1 (Below 1GHz)

Project #:	14523778
Date:	5/30/23
Test Engineer:	45258
Configuration:	EUT + Charger
Mode:	TX
Chamber:	1-RDE-A

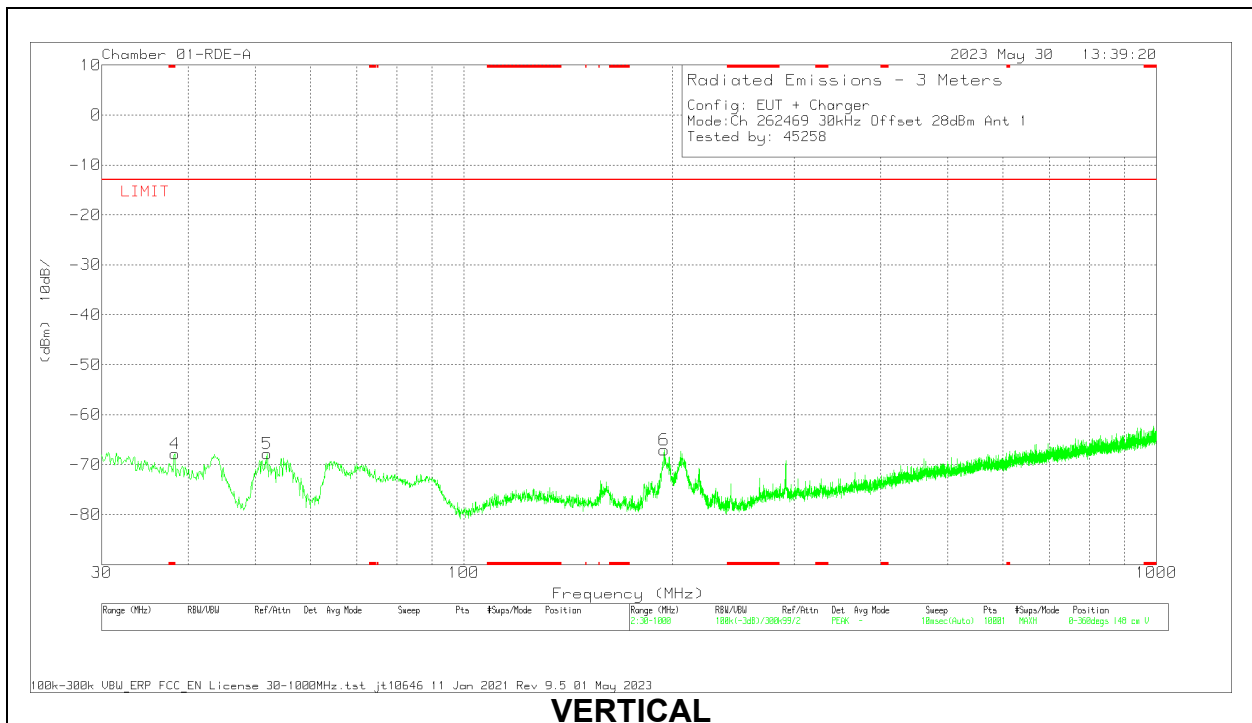
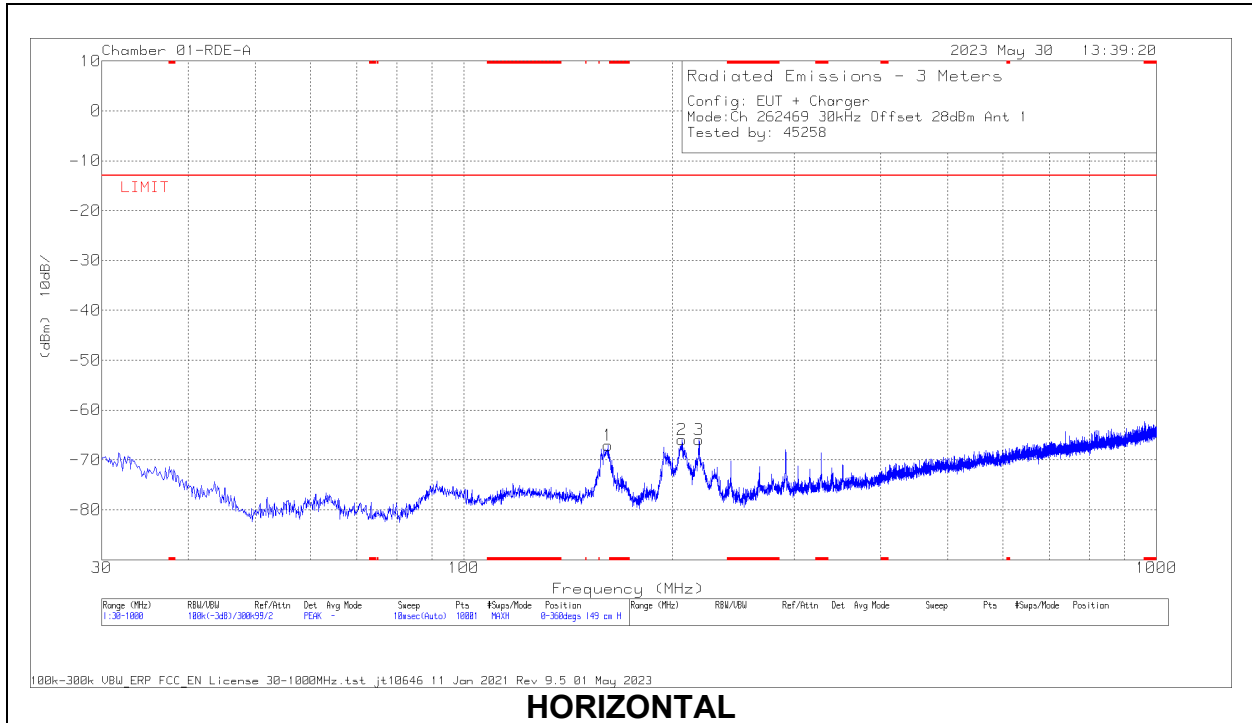


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	232075 ACF (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 38.245	33.53	Pk	20.9	-27.1	-95.2	-67.87	-13	-54.87	0-360	148	V
5	52.019	40.73	Pk	13.5	-26.9	-95.2	-67.87	-13	-54.87	0-360	148	V
1	161.435	35.68	Pk	18.1	-25.6	-95.2	-67.02	-13	-54.02	0-360	149	H
6	194.609	35.63	Pk	17.7	-25.2	-95.2	-67.07	-13	-54.07	0-360	148	V
2	206.443	37.46	Pk	16.9	-25.1	-95.2	-65.94	-13	-52.94	0-360	149	H
3	218.665	37.68	Pk	16.5	-24.9	-95.2	-65.92	-13	-52.92	0-360	149	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

10.1.4. ANT 4 (Below 1GHz)

Project #:	14523778
Date:	5/30/23
Test Engineer:	45258
Configuration:	EUT + Charger
Mode:	TX
Chamber:	1-RDE-A

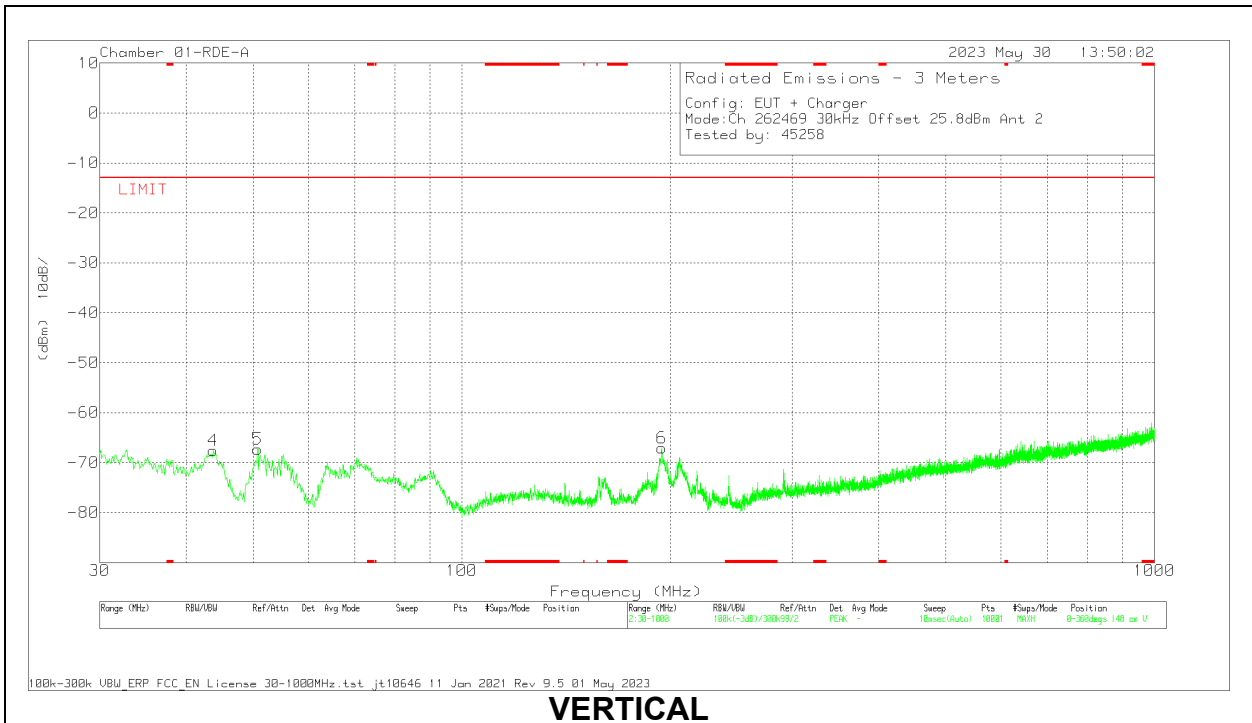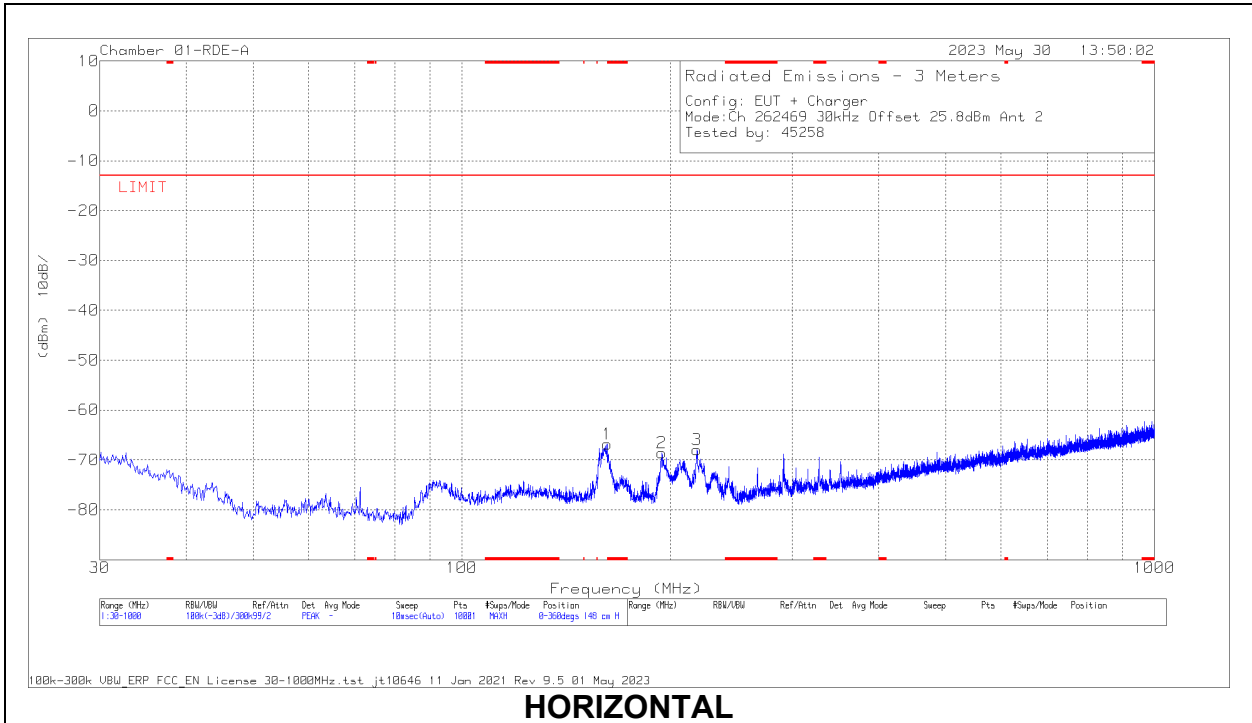

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	232075 ACF (dB/m)	Amp/Cbl (dB)	EIRP CF	Corrected Reading (dBm)	LIMIT	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 162.017	35.87	Pk	18.1	-25.6	-95.2	-66.83	-13	-53.83	0-360	148	H
4	43.774	37.63	Pk	17	-27	-95.2	-67.57	-13	-54.57	0-360	148	V
5	50.661	41.03	Pk	13.8	-26.9	-95.2	-67.27	-13	-54.27	0-360	148	V
2	194.221	34.24	Pk	17.6	-25.2	-95.2	-68.56	-13	-55.56	0-360	148	H
6	194.318	35.69	Pk	17.6	-25.2	-95.2	-67.11	-13	-54.11	0-360	148	V
3	218.568	35.68	Pk	16.5	-24.9	-95.2	-67.92	-13	-54.92	0-360	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

10.2. ADDITIONAL UNWANTED EMISSION (1559MHz – 1610MHz)

LIMITS

FCC §25.216

Limits on emissions from mobile earth stations for protection of aeronautical radionavigation-satellite service

- (a) The e.i.r.p. density of emissions from mobile earth stations placed in service on or before July 21, 2002 ...
- (b) The e.i.r.p. density of emissions from mobile earth stations placed in service on or before July 21, 2002 ...
- (c) The e.i.r.p. density of emissions from mobile earth stations placed in service after July 21, 2002 with assigned uplink frequencies between 1610 MHz and 1660.5 MHz shall not exceed -70 dBW/MHz, averaged over any 2 millisecond active transmission interval, in the band 1559-1605 MHz. The e.i.r.p. of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed -80 dBW, averaged over any 2 millisecond active transmission interval, in the 1559-1605 MHz band.

FCC §25.216 and ISED RSS-170: 5.9.1

(g) Mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies in the 1610-1626.5 MHz band shall suppress the power density of emissions in the 1605-1610 MHz band-segment to an extent determined by linear interpolation from -70 dBW/MHz at 1605 MHz to -10 dBW/MHz at 1610 MHz averaged over any 2 millisecond active transmission interval. The e.i.r.p. of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed a level determined by linear interpolation from -80 dBW at 1605 MHz to -20 dBW at 1610 MHz, averaged over any 2 millisecond active transmission interval.

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02r02

Measure wideband emissions using either:

- RBW = 1MHz, VB = 3MHz
- RBW < 1MHz, integrate over 1MHz if necessary

Measure narrowband emissions using:

- RBW = 10kHz, VB = 30kHz as worst case setting

Set detector = rms, sweep time ~ number of points x 2ms, and sweep multiple times with max hold enabled. When the detector is set to rms the number of points is set to exceed the minimum number required by ANSI C63.26 for average measurements. A peak detector may be used (e.g. to avoid slow sweep times for the narrowband emissions measurements) in lieu of average rms detection as this will provide a more conservative (higher) measured value than the rms value.

RESULTS

Both horizontal / vertical polarizations and low/ mid/ high channels were investigated on ANT 1 and ANT 4. It was found low channel to be worst case for both antennas.


Project #:	14523778
Date:	6/15/23
Test Engineer:	24943
Configuration:	EUT + Charger
Mode:	TX
Chamber:	3-RDE-C

Offset Calculation Offset:



AF 80402 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	EIRP CF	Offset (dB)
27.96	-28.7	11.8	11.06

10.2.1. ANT 1


Wideband Low Channel 1610.17MHz Vertical:

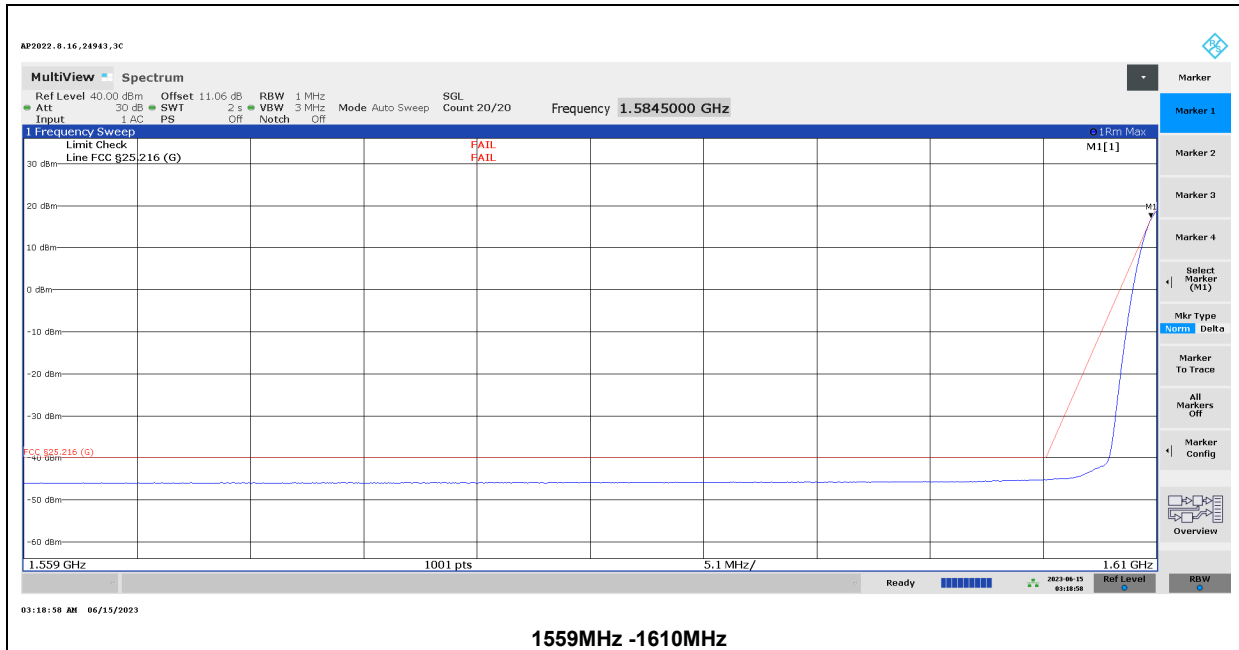



Plots below show passing result using integration method:

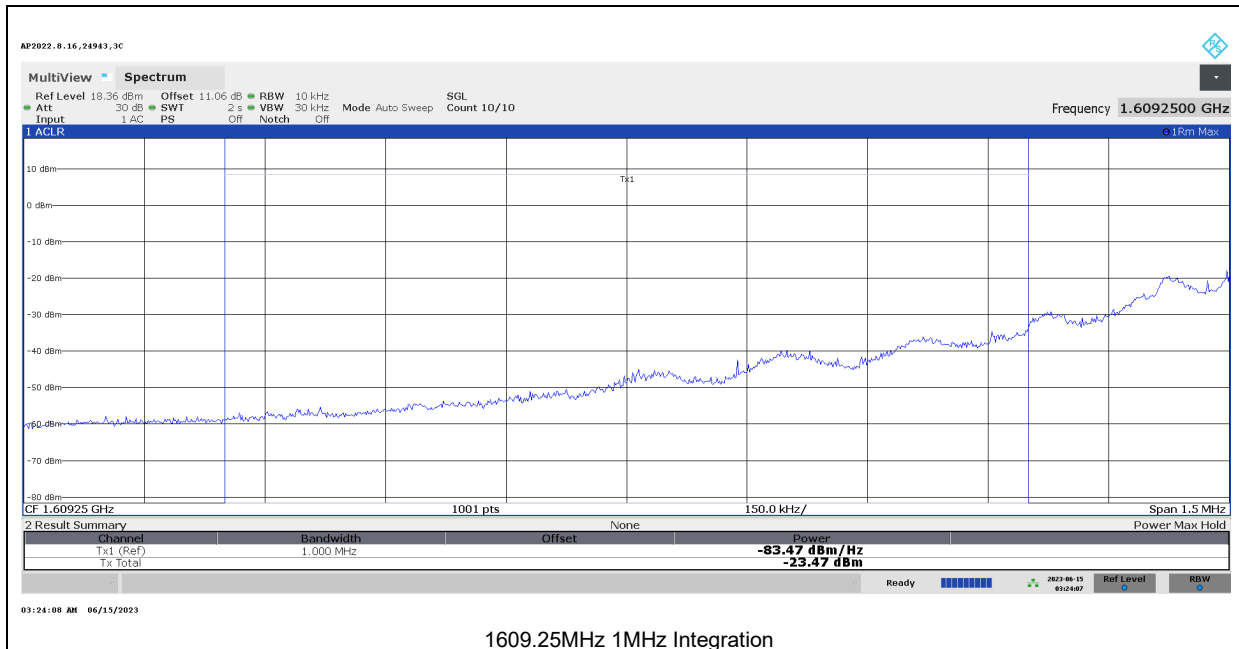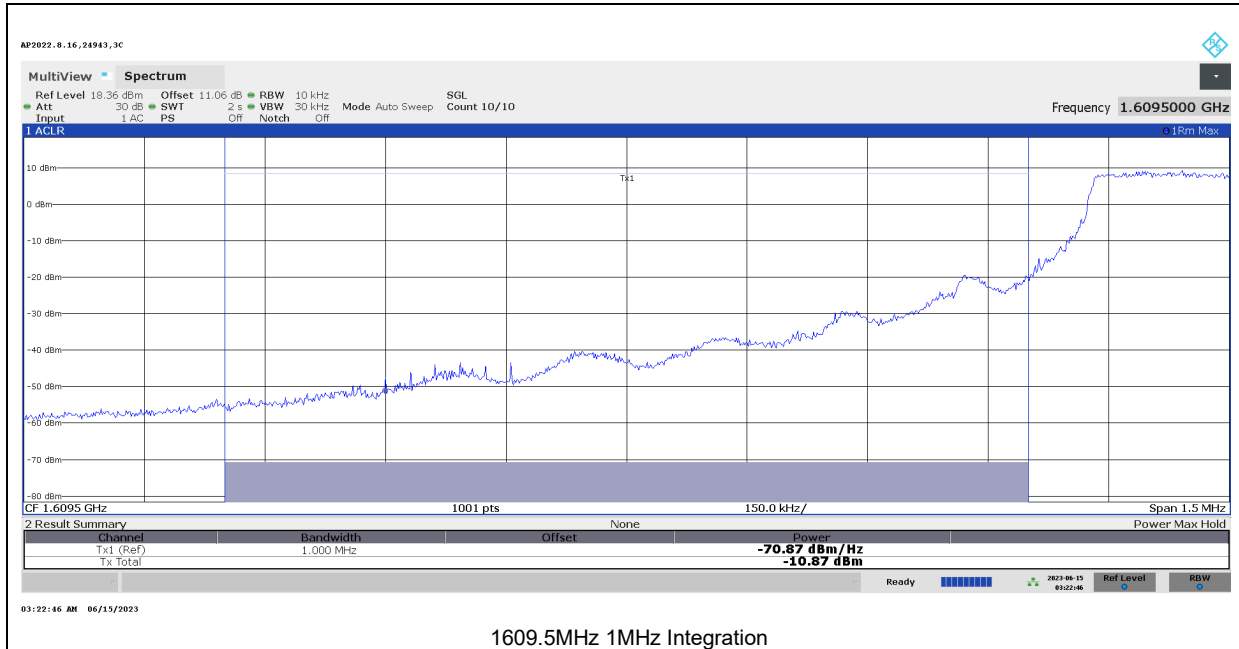


Narrowband Low Channel 1610.17MHz Vertical:

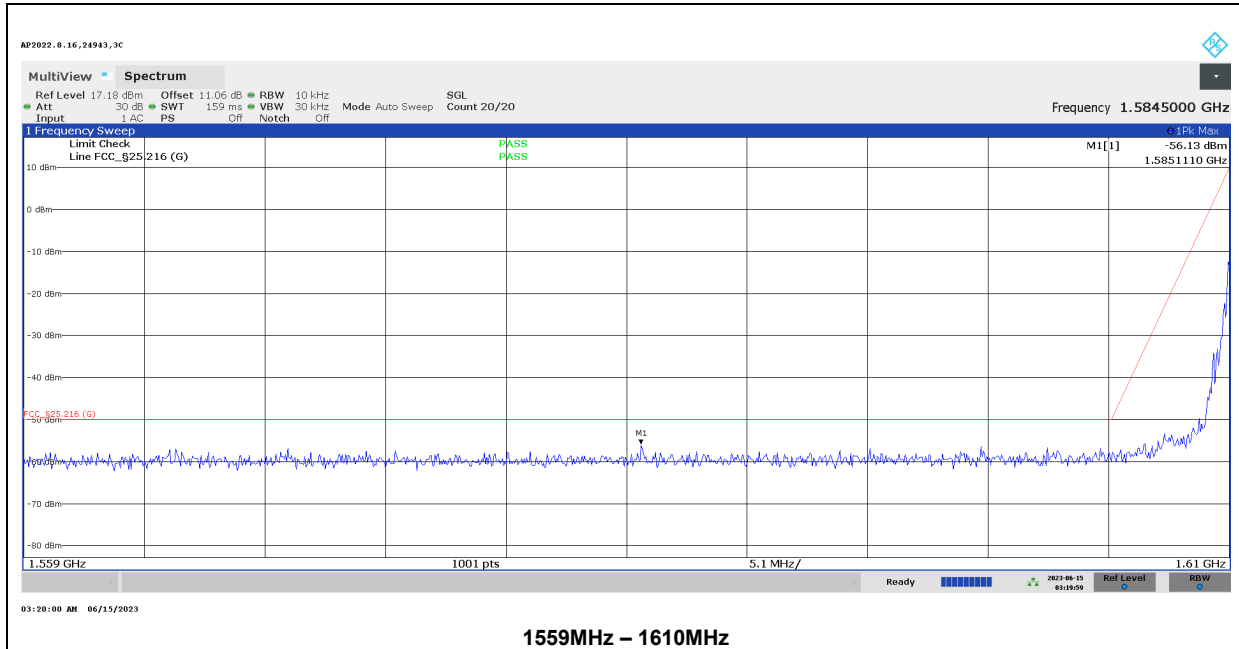


Wideband Low Channel 1610.17MHz Horizontal:

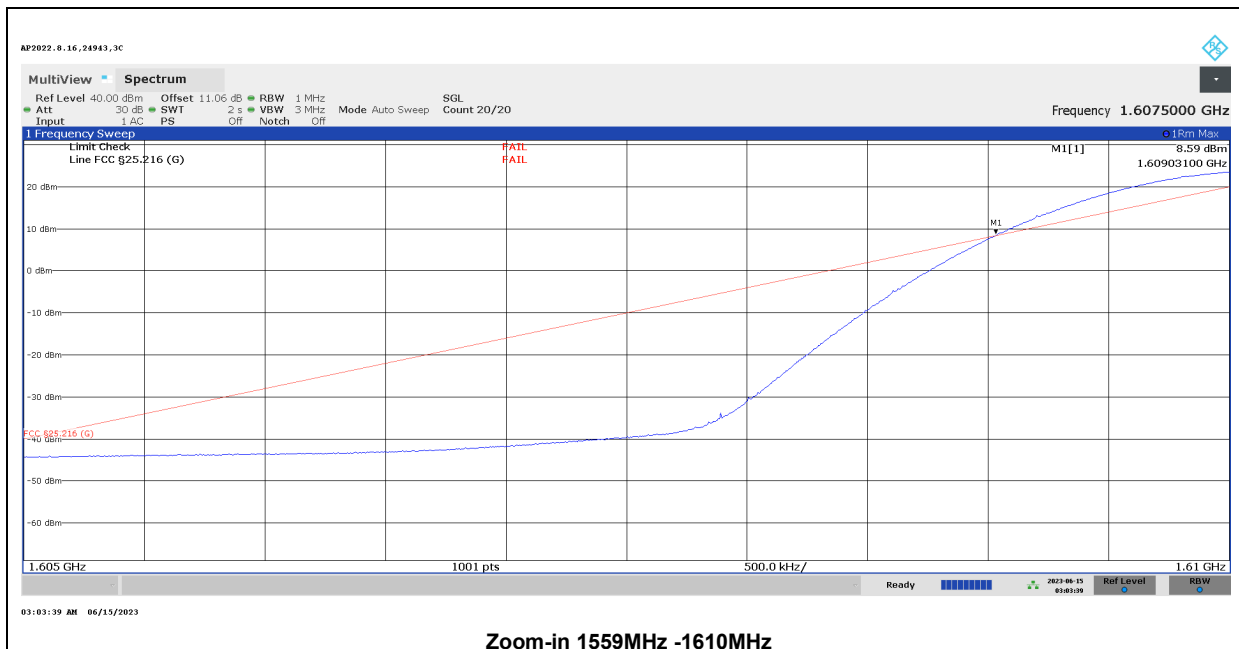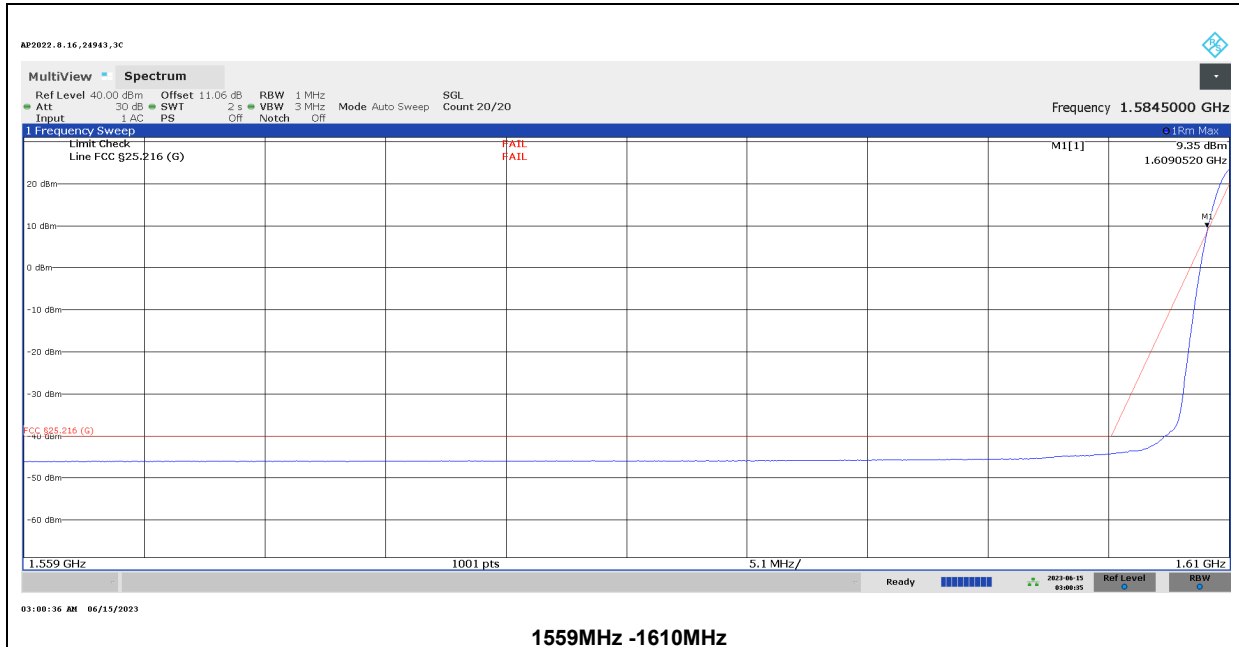


Plots below show passing result using integration method:

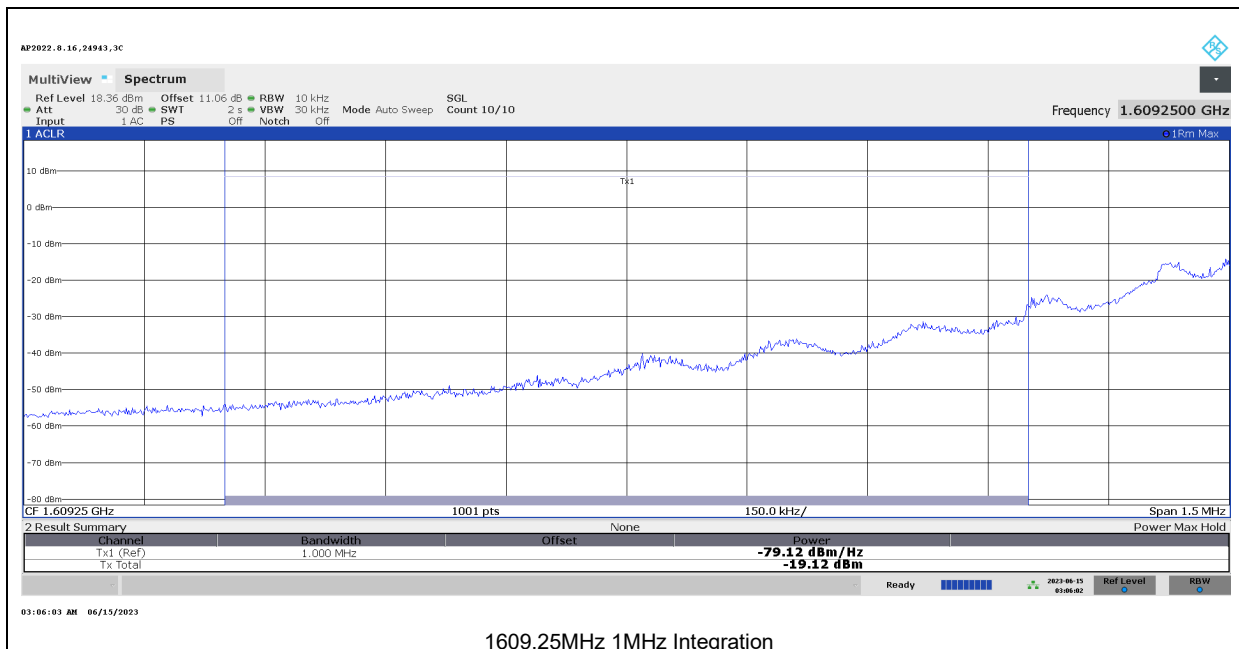


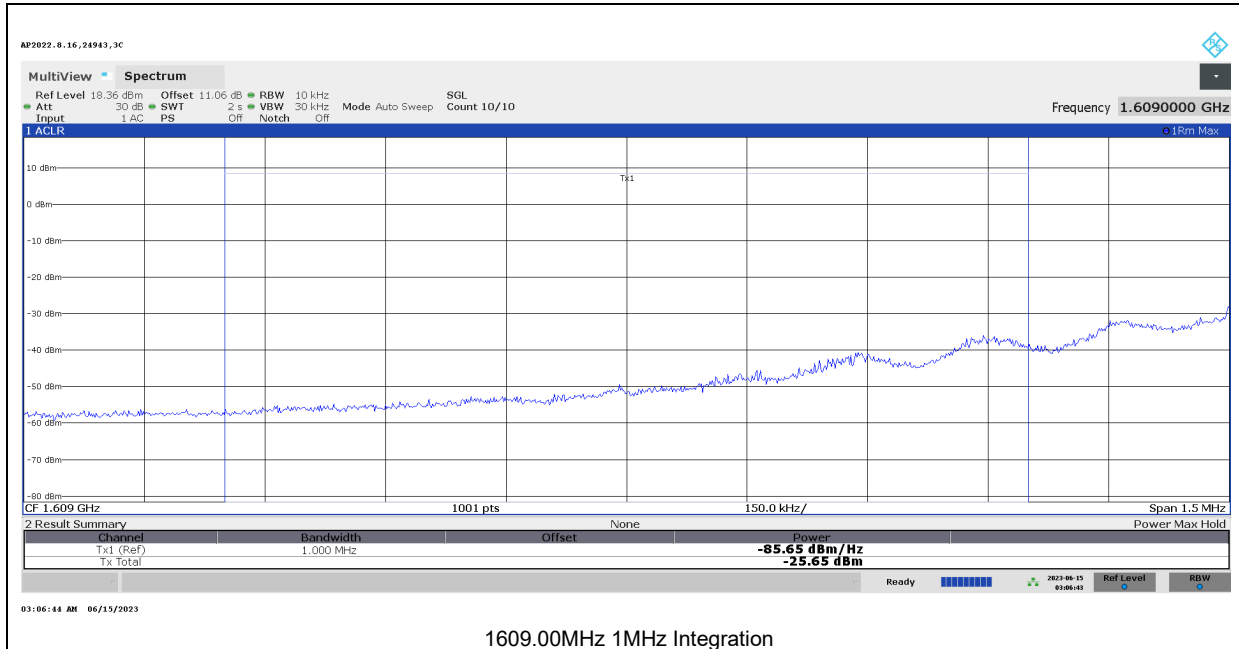


Narrowband Low Channel 1610.17MHz Horizontal:

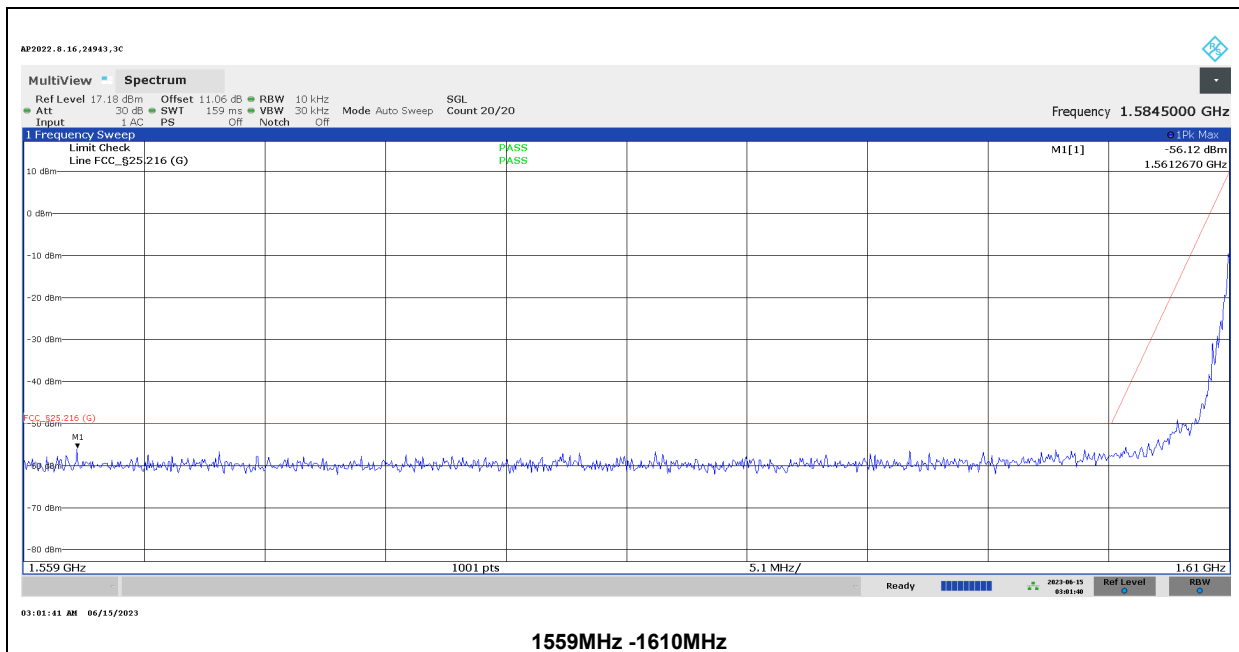


10.2.2. ANT 4



Wideband Low Channel 1610.17MHz Vertical:

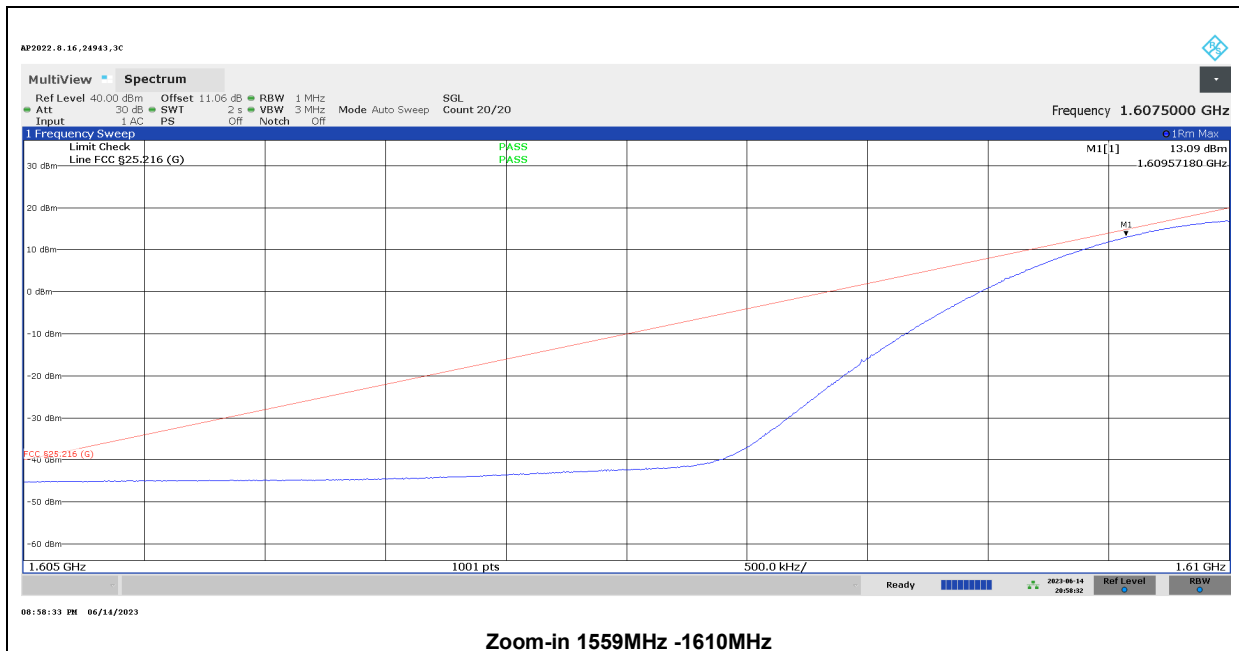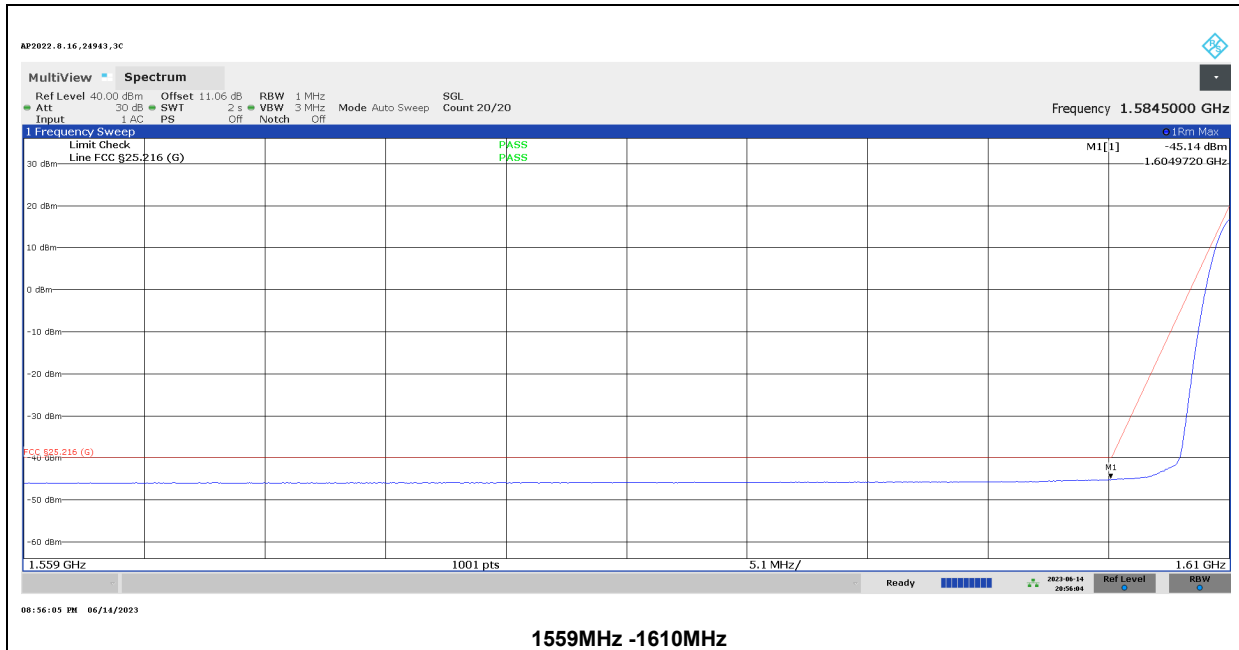



Narrowband Low Channel 1610.17MHz Vertical:

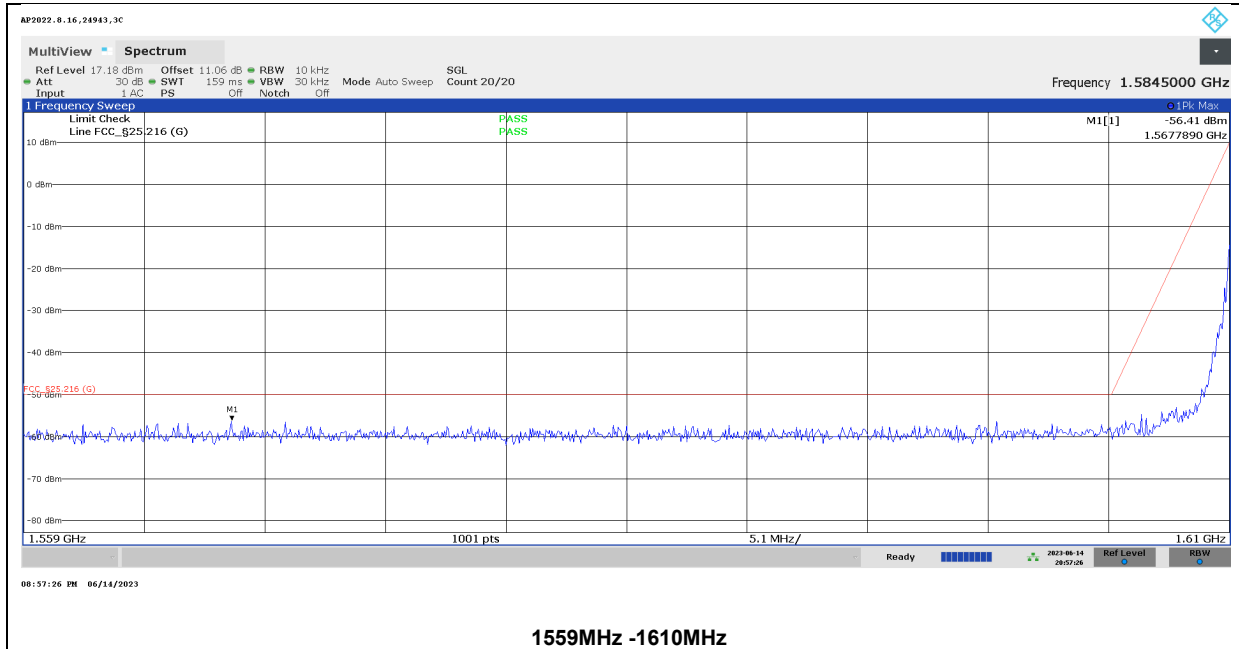


Wideband Low Channel 1610.17MHz Horizontal:

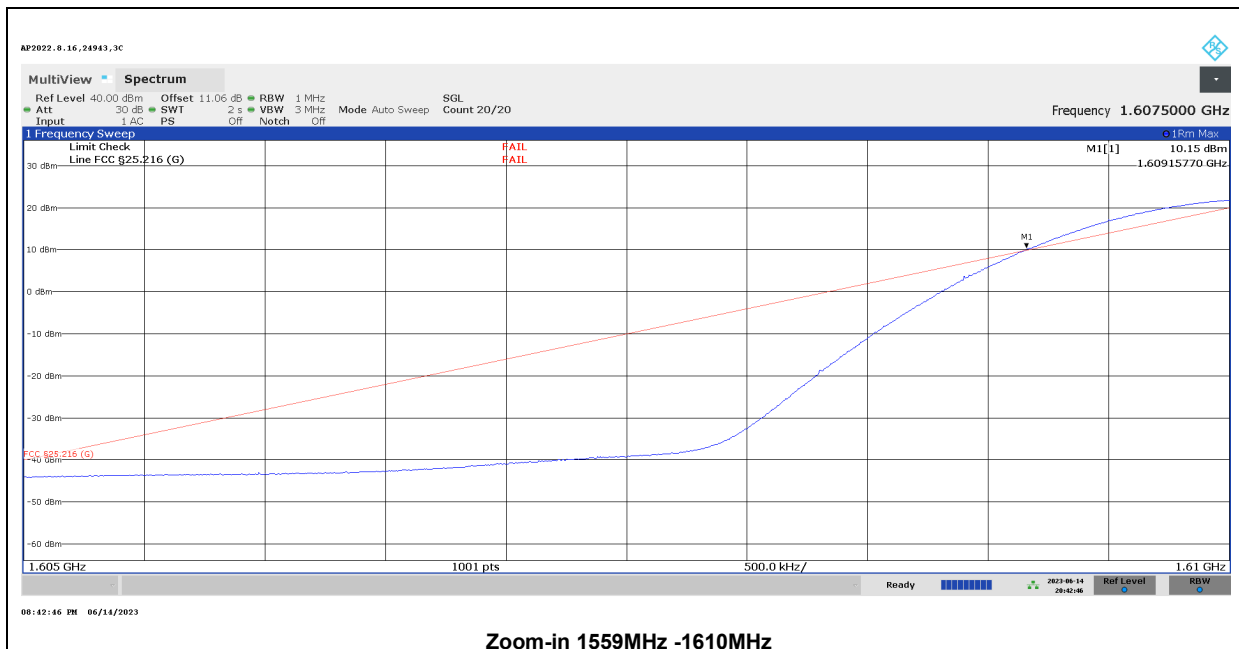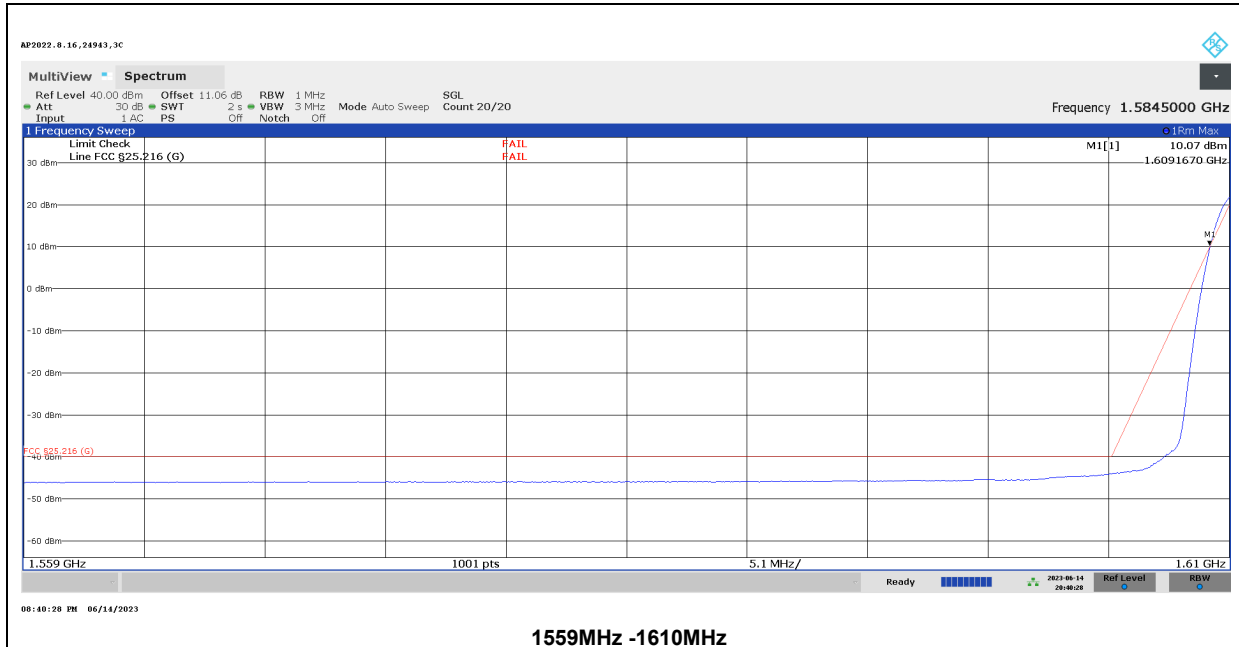


Plots below show passing result using integration method:

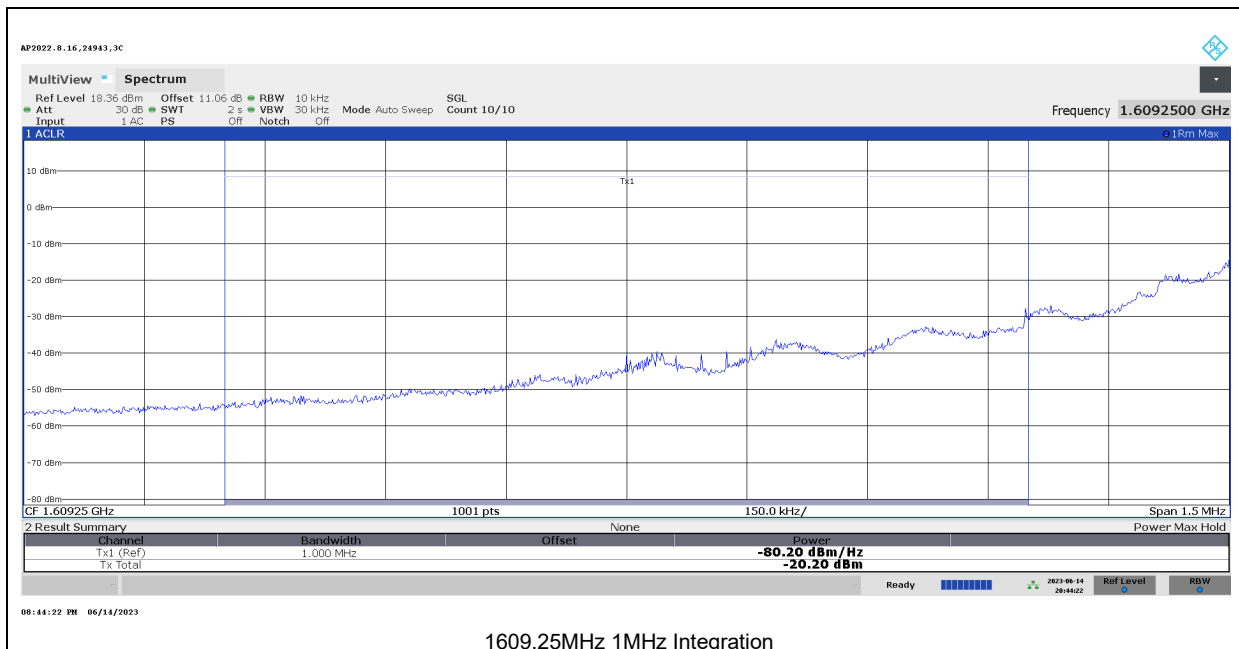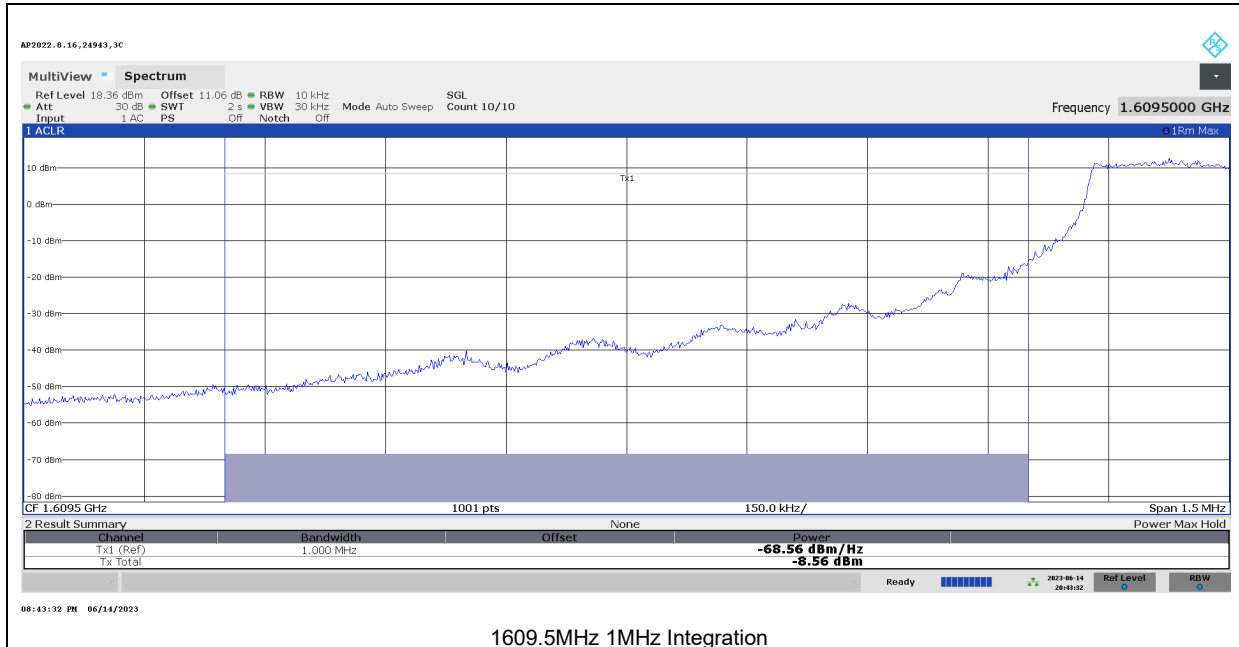

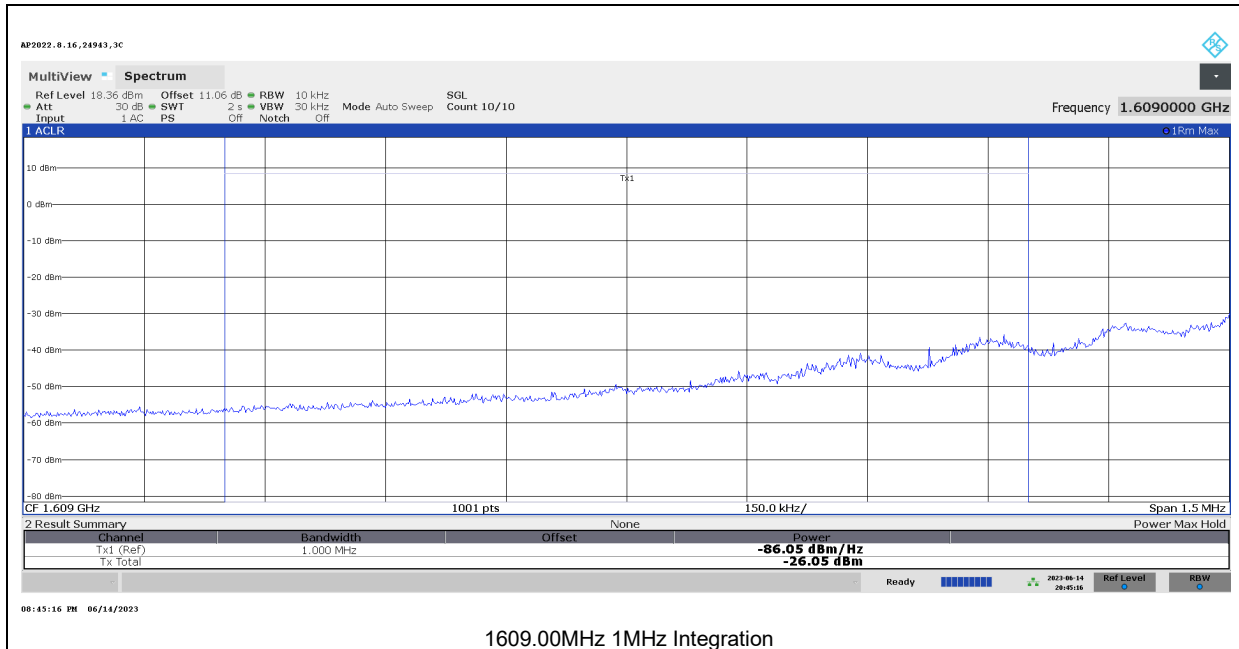

Narrowband Low Channel 1610.17MHz Horizontal:

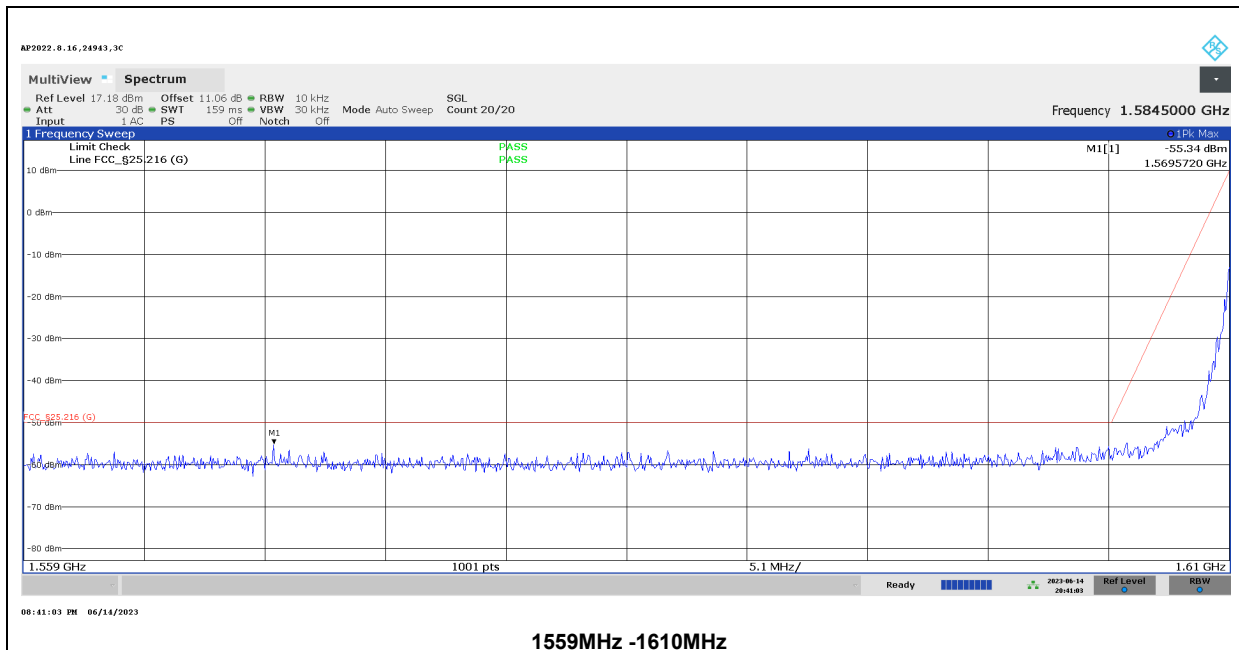

10.3. CARRIER-OFF STATE EMISSIONS (1559MHz – 1610MHz)

LIMITS

FCC §25.216 and ISED RSS-170: 5.10

Limits on emissions from mobile earth stations for protection of aeronautical radionavigation-satellite service

(i) The e.i.r.p density of carrier-off state emissions from mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies between 1 and 3 GHz shall not exceed -80 dBW/MHz in the 1559-1610 MHz band averaged over any two millisecond interval.

ISED RSS-170: 5.10 Carrier-off State Emissions

Mobile equipment with transmitting frequencies between 1 GHz and 3 GHz shall have the e.i.r.p. density of carrier-off state emissions in the band 1559-1610 MHz not exceed -80 dBW/MHz.

TEST PROCEDURE

KDB 971168 D01 v03r01/D02 v02r02

Set RBW = 1MHz, VB = 3MHz, Detector = RMS, Sweep Time = Number of Points x 2ms, and sweep multiple times with Max Hold enabled.

RESULTS


No emissions were found on both horizontal and vertical polarization for ANT 1 and ANT 4.

Project #:	14523778
Date:	7/1/23
Test Engineer:	31300
Configuration:	EUT + Charger
Mode:	RX (TX Off)
Chamber:	A

Offset Calculation Offset:

Antenna Factor (dB/m)	Amp/Cbl/Filtr/Pad (dB)	EIRP CF	Offset (dB)
27.93	-28.84	11.8	10.89

10.3.1. ANT 1

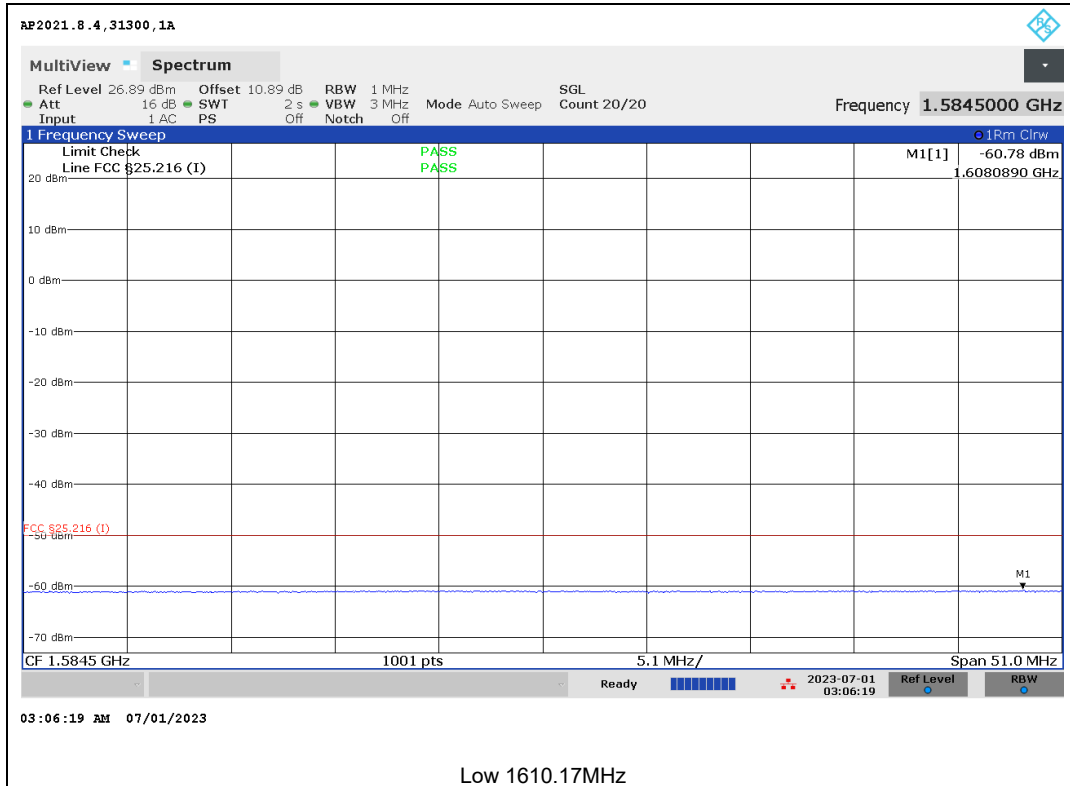

10.3.2. ANT 4



10.4. FREQUENCY STABILITY

LIMITS

FCC §25.202

(d) Frequency tolerance, Earth stations. The carrier frequency of each earth station transmitter authorized in these services shall be maintained within 0.001 percent of the reference frequency.

ISED RSS-170: 5.3

For mobile earth station equipment, the carrier frequency shall not depart from the reference frequency by more than ±10 ppm.

TEST PROCEDURE

Use spectrum with Frequency Error measurement capability.

- Temp. = -30°C to +50°C
- Voltage = (85% - 115%)
 Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.
 End Voltage, 3.01VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

RESULTS

Test Engineer ID:	26118	Test Date:	3/17/23
--------------------------	-------	-------------------	---------

Frequency Reference (MHz)		1610.16988		Frequency Reading (MHz)	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -10dB BW (MHz)	F high @ -10dB BW (MHz)			
Temperature	Voltage					
Normal (20 C)	Normal	1610.078813	1610.260938	1610.169875		
Extreme (50C)		1610.07775	1610.261188	1610.169469	-406.3	-0.25
Extreme (40C)		1610.078813	1610.261063	1610.169938	62.5	0.04
Extreme (30C)		1610.078125	1610.261313	1610.169719	-156.3	-0.10
Extreme (10C)		1610.077563	1610.261125	1610.169344	-531.2	-0.33
Extreme (0C)		1610.079313	1610.260938	1610.170125	250.0	0.16
Extreme (-10C)		1610.0785	1610.260563	1610.169531	-343.7	-0.21
Extreme (-20C)		1610.078688	1610.260938	1610.169813	-62.5	-0.04
Extreme (-30C)		1610.077188	1610.261438	1610.169313	-562.5	-0.35
20C		15%	1610.0785	1610.260813	1610.169656	-218.7
	-15%	1610.077188	1610.260688	1610.168938	-937.5	-0.58
	End Point	1610.078375	1610.261563	1610.169969	93.7	0.06

11. SETUP PHOTOS

Please refer to 14523778-EP1V1 for setup photos

END OF REPORT