

TEST REPORT

Report Number: 14523744-E2V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3101 (Full Test Model)
A3102, A3104 (Variant Models)

Brand : APPLE

FCC ID : BCG-E8436A (Full Test Model)
BCG-E8437A, BCG-E8438A (Variant Models)

IC : 579C-E8436A (Full Test Model)
579C-E8437A, 579C-E8438A (Variant Models)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
August 03, 2023

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	8/2/2023	Initial Issue	Francisco Guarnero
V2	8/3/2023	Address TCB Questions section 6, 8, 10	Tony Li

TABLE OF CONTENTS

TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. TEST SUMMARY	7
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
5.1. METROLOGICAL TRACEABILITY	8
5.2. DECISION RULES.....	8
5.3. MEASUREMENT UNCERTAINTY.....	8
6. EQUIPMENT UNDER TEST	9
6.1. EUT DESCRIPTION	9
6.2. MAXIMUM OUTPUT POWER.....	9
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
6.4. SOFTWARE AND FIRMWARE.....	10
6.5. WORST-CASE CONFIGURATION AND MODE.....	10
6.6. DESCRIPTION OF TEST SETUP.....	11
7. MEASUREMENT METHOD.....	15
8. TEST AND MEASUREMENT EQUIPMENT	16
9. ANTENNA PORT TEST RESULTS	18
9.1. ON TIME AND DUTY CYCLE.....	18
9.2. 99% BANDWIDTH.....	19
9.2.1. HIGH POWER BLE (1Mbps).....	20
9.2.2. HIGH POWER BLE TXBF (1Mbps).....	21
9.2.3. HIGH POWER BLE (2Mbps).....	22
9.2.4. HIGH POWER BLE TXBF (2Mbps).....	23
9.3. 6 dB BANDWIDTH.....	24
9.3.1. HIGH POWER BLE (1Mbps).....	25
9.3.2. HIGH POWER BLE TXBF (1Mbps).....	26
9.4. OUTPUT POWER.....	27
9.4.1. HIGH POWER BLE (1Mbps).....	28
9.4.2. HIGH POWER BLE TXBF (1Mbps).....	28
9.4.3. HIGH POWER BLE (2Mbps).....	29
9.4.4. HIGH POWER BLE TXBF (2Mbps).....	29
9.4.5. LOW POWER BLE (1Mbps)	30

9.4.6.	LOW POWER BLE TXBF (1Mbps)	30
9.4.7.	LOW POWER BLE (2Mbps)	31
9.4.8.	LOW POWER BLE TXBF (2Mbps)	31
9.5.	AVERAGE POWER	32
9.5.1.	HIGH POWER BLE (1Mbps)	33
9.5.2.	HIGH POWER BLE TXBF (1Mbps)	33
9.5.3.	HIGH POWER BLE (2Mbps)	34
9.5.4.	HIGH POWER BLE TXBF (2Mbps)	34
9.5.5.	LOW POWER BLE (1Mbps)	35
9.5.6.	LOW POWER BLE TXBF (1Mbps)	35
9.5.7.	LOW POWER BLE (2Mbps)	36
9.5.8.	LOW POWER BLE TXBF (2Mbps)	36
9.6.	POWER SPECTRAL DENSITY	37
9.6.1.	HIGH POWER BLE (1Mbps)	38
9.6.2.	HIGH POWER BLE TXBF (1Mbps)	39
9.6.3.	HIGH POWER BLE (2Mbps)	40
9.6.4.	HIGH POWER BLE TXBF (2Mbps)	41
9.7.	CONDUCTED SPURIOUS EMISSIONS	42
9.7.1.	HIGH POWER BLE (1Mbps)	43
9.7.2.	HIGH POWER BLE TXBF (1Mbps)	45
9.7.3.	HIGH POWER BLE (2Mbps)	47
9.7.4.	HIGH POWER BLE TXBF (2Mbps)	49
9.7.5.	LOW POWER BLE (1Mbps)	51
9.7.6.	LOW POWER BLE TXBF (1Mbps)	53
9.7.7.	LOW POWER BLE (2Mbps)	55
9.7.8.	LOW POWER BLE TXBF (2Mbps)	57
10.	RADIATED TEST RESULTS	59
10.1.	LIMITS AND PROCEDURE	59
10.2.	TRANSMITTER ABOVE 1 GHz	61
10.2.1.	HIGH POWER BLE (1Mbps)	61
10.2.2.	HIGH POWER BLE TXBF (1Mbps)	69
10.2.3.	HIGH POWER BLE (2Mbps)	73
10.2.4.	HIGH POWER BLE TXBF (2Mbps)	81
10.2.5.	HARMONICS AND SPURIOUS EMISSIONS	85
10.2.6.	LOW POWER BLE (1Mbps)	91
10.2.7.	LOW POWER BLE TXBF (1Mbps)	99
10.2.8.	LOW POWER BLE (2Mbps)	103
10.2.9.	LOW POWER BLE TXBF (2Mbps)	111
10.3.	WORST CASE BELOW 1 GHZ	115
10.4.	WORST CASE 18-26 GHz	117
11.	AC POWER LINE CONDUCTED EMISSIONS	119
11.1.	AC Power Line WITH AC/DC ADAPTER	120
11.2.	AC Power Line With Laptop	122
12.	SETUP PHOTOS	124

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMARTPHONE

MODEL: A3101 (Full Test Model)
A3102, A3104 (Variant Models)

BRAND: APPLE

SERIAL NUMBER: C07GT40004U00006GU (Conducted)
CLX2X4640 (Radiated)
CY2KJ6YF12 (Radiated)

SAMPLE RECEIPT DATE: JANUARY 23, 2023

DATE TESTED: MARCH 09, 2023 – JULY 17, 2023

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Lab Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Francisco Guarnero
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW	Complies	None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power	Complies	None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD	Complies	None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following standards/ rules/ KDBs:

FCC CFR 47 Part 2
 FCC CFR 47 Part 15
 ANSI C63.10-2013
 KDB 558074 D01 15.247 Meas Guidance v05r02
 KDB 414788 D01 Radiated Test Site v01r01
 KDB 662911 D01 Multiple Transmitter Output v02r01
 RSS-GEN Issue 5 + A1:2019 + A2:2021
 RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc.is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
<input type="checkbox"/>	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
<input checked="" type="checkbox"/>	Building 3: 843 Auburn Court, Fremont, CA 94538 USA			
<input checked="" type="checkbox"/>	Building 4: 47658 Kato Rd, Fremont, CA 94538 USA			
<input type="checkbox"/>	Building 5: 47670 Kato Rd, Fremont, CA 94538 USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U_{Lab}
Conducted Antenna Port Emission Measurement	1.940 dB
Power Spectral Density	2.466 dB
Time Domain Measurements Using SA	3.39 %
RF Power Measurement Direct Method Using Power Meter	0.450 dB (Peak) 1.300 dB (Ave)
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 db
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 db
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 db
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 db
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 db
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 db

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC, NB UNII, 802.15.4, 802.15.4ab-NB and MSS technologies. The rechargeable battery is not user accessible.

The Model and FCC/IC ID covered by this report includes:

Parent Model: A3101, FCC ID: BCG-E8436A, IC ID: 579C-E8436A

Variant Models: A3102; FCC ID: BCG-E8437A, IC ID: 579C-E8437A
A3104; FCC ID: BCG-E8438A, IC ID: 579C-E8438A

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Configuration	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
ANT 4	High Power	2402 - 2480	BLE 1M	20.89	122.74
	Low Power			11.91	15.52
	High Power	2404 - 2478	BLE 2M	21.19	131.52
	Low Power			12.19	16.56
ANT 3	High Power	2402 - 2480	BLE 1M	21.45	139.64
	Low Power			11.95	15.67
	High Power	2404 - 2478	BLE 2M	21.69	147.57
	Low Power			12.17	16.48
BF, ANT 4 + ANT 3	High Power	2402 - 2480	BLE 1M	24.05	254.10
	Low Power			14.85	30.55
	High Power	2404 - 2478	BLE 2M	24.23	264.85
	Low Power			15.10	32.36

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna type is IFA.

The antenna(s) gain, as provided by the manufacturer' are as follows:
Cable loss is 2.1 dB.

Frequency Range (GHz)	ANT 4 (dBi)	ANT 3 (dBi)
2.4	-4.0	-1.5

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was 21.1.304.2213

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y, and Z on ANT 4, ANT 3 and 2TX Beamforming. It was determined that Y (Landscape) was the worst-case orientation for both ANT 4 and ANT3, and X (Flatbed) was the worst-case orientation for 2TX beamforming.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

High Power Beamforming BLE 1Mbps mode is set to maximum power per chain to cover both SISO and MIMO modes to complies with radiated spurious emissions limits in the restricted bands between 1GHz and 18GHz low/mid/high channel (except the band edge).

Radiated emissions below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit

For below 1GHz tests were performed with EUT connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

For simultaneous transmission of multiple channels in the 2.4GHz BLE and 5GHz bands. No noticeable emission was found.

Note: Note: In the Radiated Plots and emissions data, ANT0=ANT4 and ANT1=ANT3.



6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description	Manufacturer	Model	Serial Number	FCC ID/ DoC		
Laptop	Apple	Macbook Pro	C02VD7SAHV22	BCGA1708		
Laptop AC/DC adapter	Liteon Technology	A1424	NSW25679	DoC		
EUT AC/DC adapter	Apple	A1720	C3D8417A7R93KVPA8	DoC		
Conducted Switch Box	UL	n/a	208281	N/A		
10dB Fixed Attenuator, 2 Watts Up to 26.5 GHz	Pasternack Enterprises	PE7024-10	236358	N/A		
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	SMA	1	SMA	Shielded	0.75	To spectrum Analyzer
2	Antenna	2	SMA	Un-shielded	0.2	To Conducted Switch Box
3	USB-C	1	USB-C	Shielded	1.0	N/A
4	AC	1	AC	Un-shielded	2	N/A
I/O CABLES (RF RADIATED AND AC LINE CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Shielded	1	N/A


TEST SETUP

The EUT setup is shown as below. Test software exercised the radio card.


SETUP DIAGRAM FOR CONDUCTED TESTS

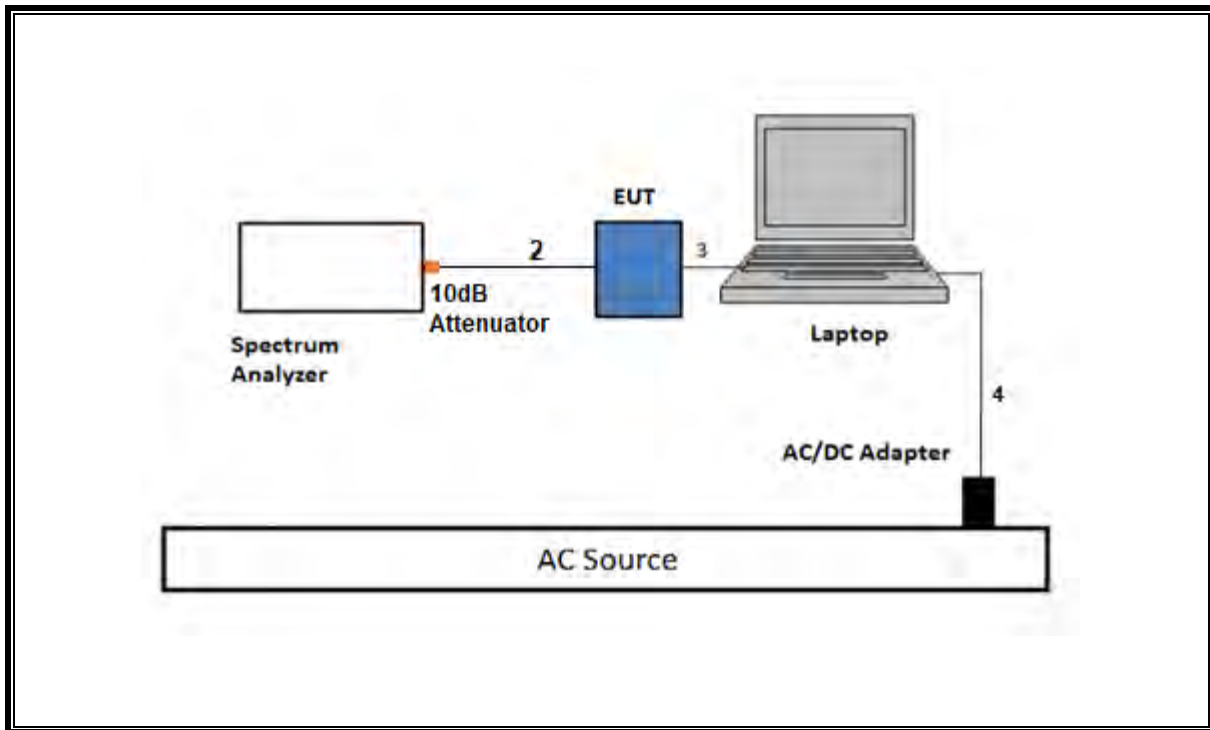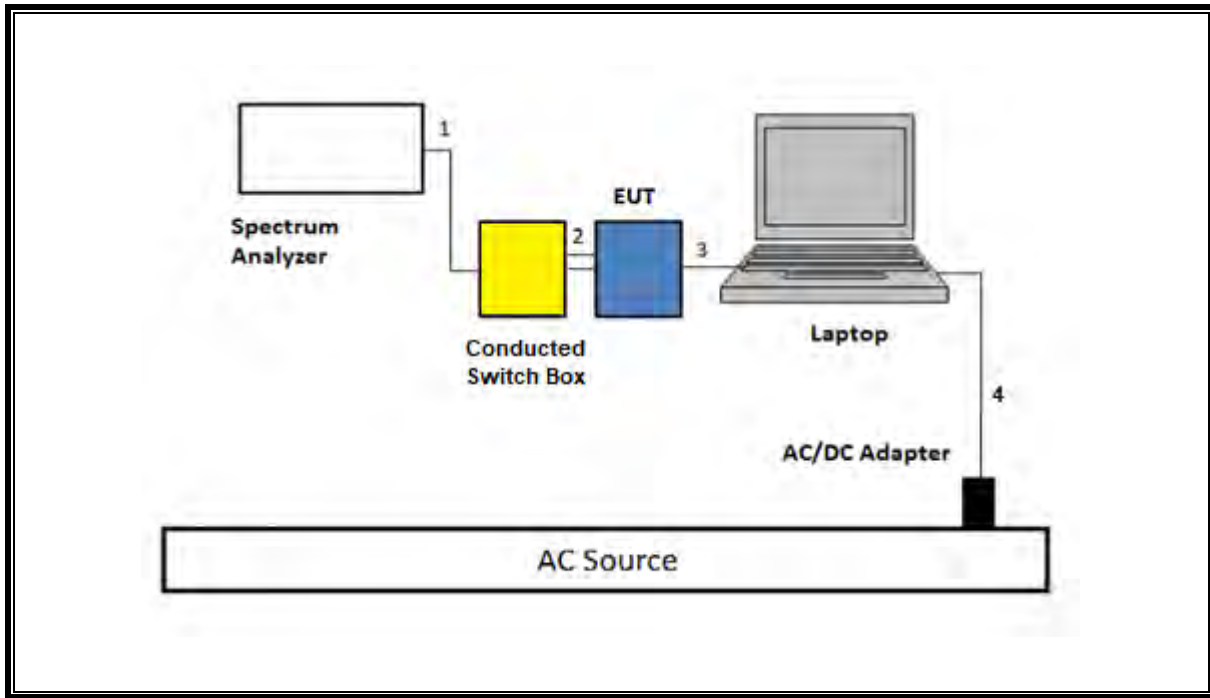


SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz

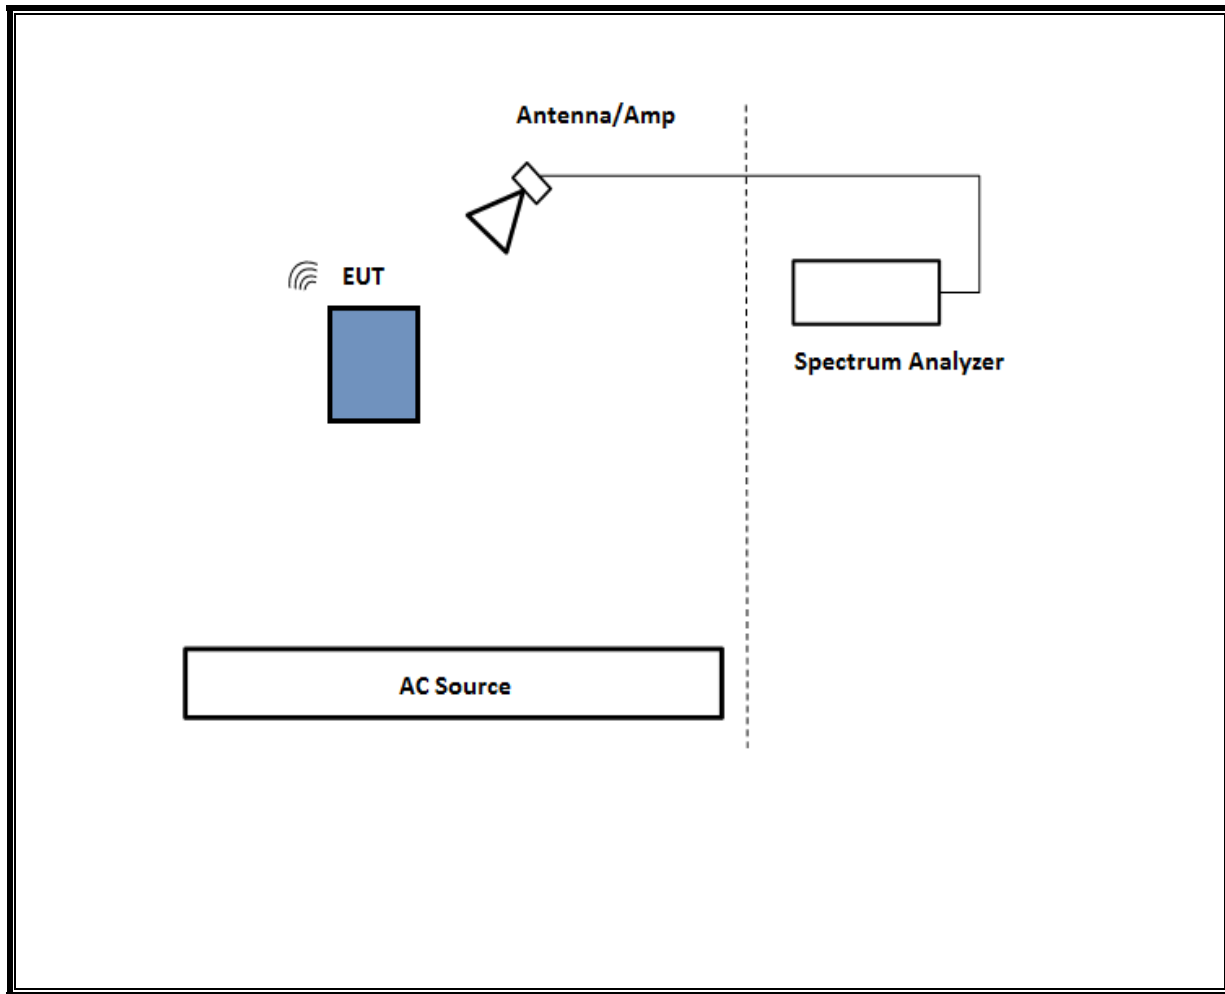

SETUP DIAGRAM FOR Below 1GHz and AC LINE CONDUCTED TEST

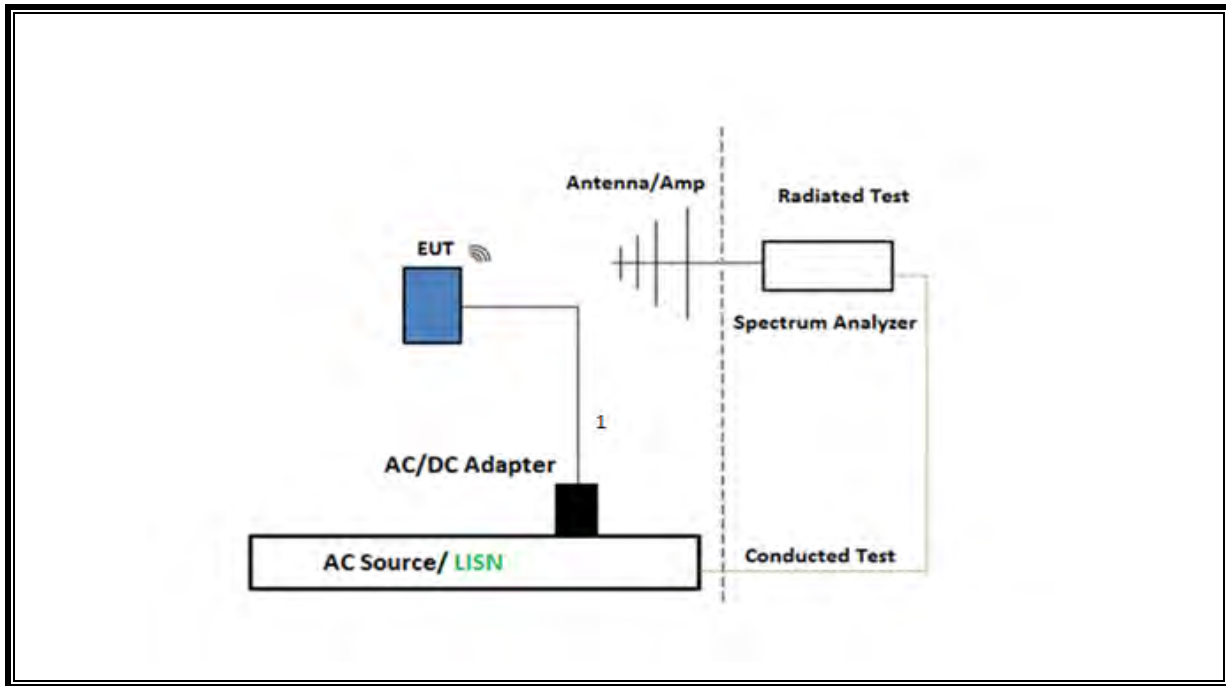

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

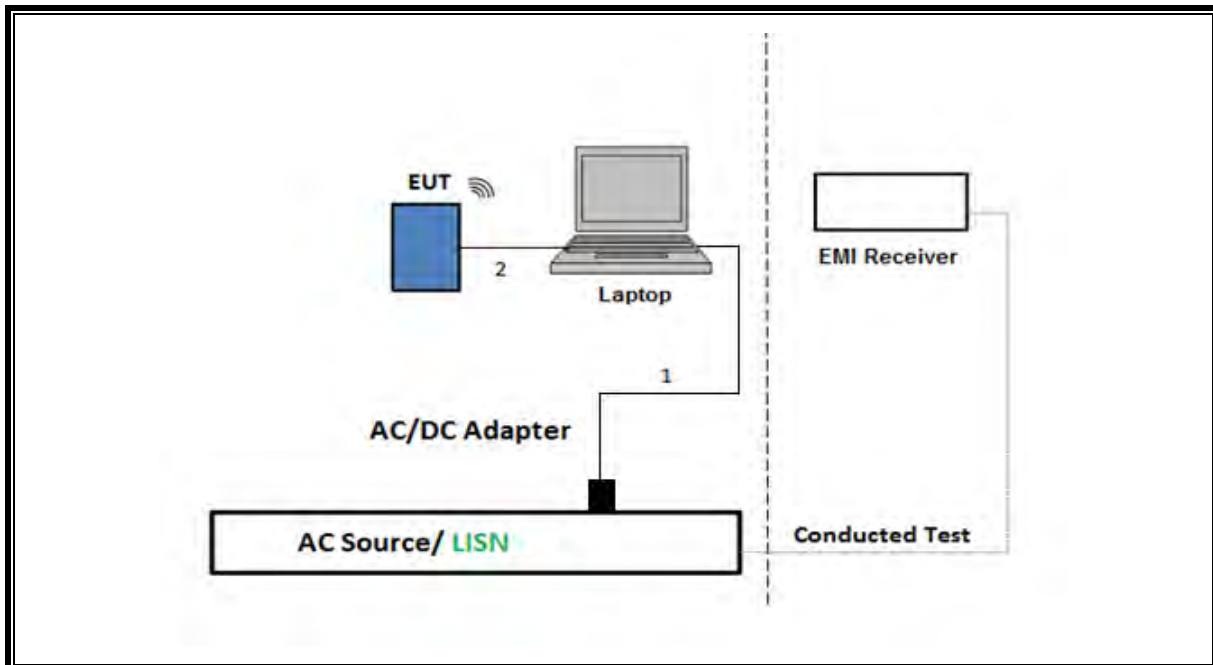

7. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 558074 D01 v05r02, Section 6.

6 dB BW: ANSI C63.10 Subclause 11.8.1

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Output Power: ANSI C63.10 Subclause 11.9.1.3
Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause 11.9.2.3.2
Measurement using gated average power meter.

PSD: ANSI C63.10 Subclause 1.10.2
Method PKPSD (peak PSD)

Radiated emissions restricted frequency bands:
ANSI C63.10 Subclause 1.12.1 & Clause 13

Conducted emissions in restricted frequency bands:
ANSI C63.10 Subclause 11.12.2

Band-edge: ANSI C63.10 Subclause -11.13.3.2 & Clause 13:
Integration method -Peak detection

Band-edge: ANSI C63.10 Subclause 11.13.3.3 & Clause 13:
Integration method -Trace averaging with continuous transmission at full power

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

Radiated emissions non-restricted frequency bands ANSI C63.10 Subclause 1.11 & Clause 13

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4 & 13

NOTE: All conducted antenna port tests for Beamforming applied the same test procedures as BLE 1Mbps and BLE 2Mbps normal modes.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	230299	01/12/2024	01/12/2023
RF Filter Box, 1-18GHz, 12 Port.	UL-FR1	Frankenstein	231874	04/19/2024	04/19/2023
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179372	02/29/2024	02/29/2023
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	230300	01/12/2024	01/12/2023
RF Filter Box, 1-18GHz, 12 Port.	UL-FR1	Frankenstein	231875	02/27/2024	02/27/2023
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	170063	02/29/2024	02/29/2023
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	84796	09/19/2023	09/19/2022
RF Filter Box, 1-18GHz, 12 Port	UL-FR1	Frankenstein	217521	10/09/2023	10/09/2022
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201498	02/19/2024	02/19/2023
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	226673	01/09/2024	01/09/2023
RF Filter Box, 1-18GHz, 17 Ports	UL-FR1	RATS 2	226781	04/30/2024	04/30/2023
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169935	02/29/2024	02/29/2023
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	80714	10/06/2023	10/06/2022
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	89831	08/10/2023	08/10/2022
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201497	02/29/2024	02/29/2023
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	199658	12/06/2023	12/06/2022
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201499	02/29/2024	02/29/2023
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	226671	01/09/2024	01/09/2023
RF Filter Box, 1-18GHz, 17 Ports	UL-FR1	RATS 2	226779	03/05/2024	03/05/2023
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	226078	02/29/2024	02/29/2023

Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	90756	01/31/2024	01/31/2023
Power Sensor, P-series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	90389	01/31/2024	01/31/2023
*Conducted Switch Box	N/A	CSB	221008	06/21/2023	06/21/2022
10dB Fixed Attenuator, 2 Watts Up to 26.5 GHz	Pasternack Enterprises	PE7024-10	236358	Verified/Characterized before use	
10dB Fixed Attenuator, 2 Watts Up to 26.5 GHz	Pasternack Enterprises	PE7024-10	236355	Verified/Characterized before use	
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Keysight Technologies Inc	E4440A	81311	02/29/2024	02/29/2023
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	80397	02/28/2024	02/28/2023
*Antenna Horn, 18 to 26.5GHz	ARA	MWH-1826/B	172353	06/01/2023	06/01/2022
RF Amplifier Assembly, 18-26.5GHz, 60dB Gain	AMPLICAL	AMP18G26.5-60	171583	02/29/2024	02/29/2023
*Antenna, Passive Loop 100KHz to 30MHz	ETS-Lindgren	EM-6872	170015	07/28/2023	07/28/2022
*Antenna, Passive Loop 30Hz to 1MHz	Electro-Metrics	EM-6871	170013	07/28/2023	07/28/2023
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	85214	02/28/2024	02/28/2023
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A-544	87738	02/28/2024	02/28/2023

AC Line Conducted					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	93091	02/29/2024	02/29/2023
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN-50/250-25-2-01-480V	175764	01/31/2024	01/31/2023
*Transient Limiter	TE	TBFL1	207996	07/15/2023	07/15/2022
UL AUTOMATION SOFTWARE					
Radiated Software	UL	UL EMC	Ver 9.5, May 1, 2023		
Conducted Software	UL	UL EMC	2020.8.16		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, Mar 3, 2023		

*Testing was completed before equipment calibration date

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE


KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
BLE, 1Mbps	100.00	100.00	1.000	100.00%	0.00	0.010
BLE, 2Mbps	100.00	100.00	1.000	100.00%	0.00	0.010

Note: Duty Cycle for normal BLE modes are identical to Duty Cycle of TxBF modes.

DUTY CYCLE PLOTS

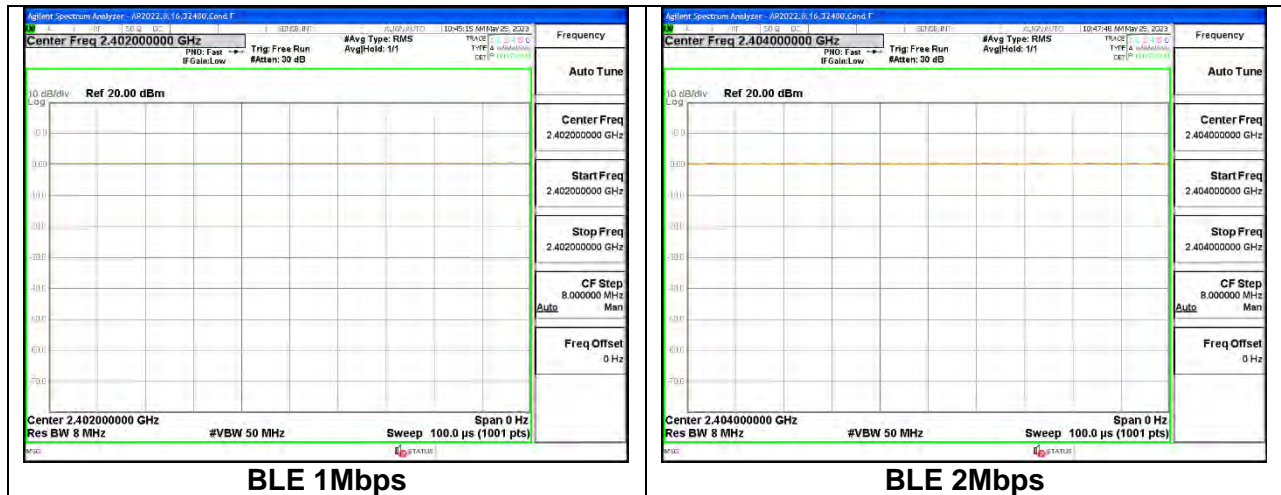

9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


RESULTS

Only High-Power modes result is reported, it covers all Low Power modes. Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.2.1. HIGH POWER BLE (1Mbps)


ANT 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0467
Middle	2440	1.0479
High	2480	1.0491

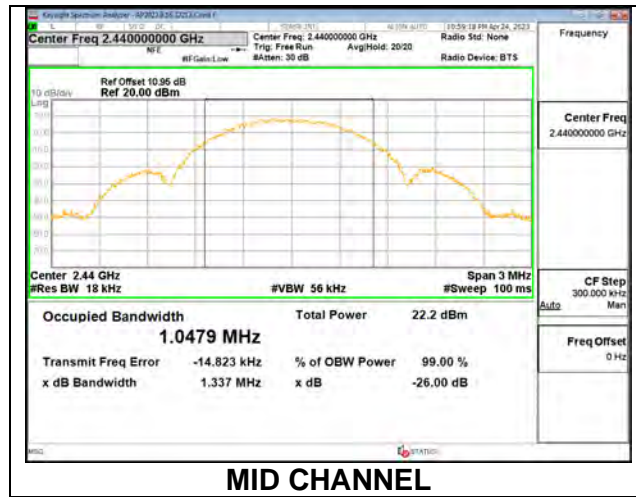

ANT 3


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0485
Middle	2440	1.0482
High	2480	1.0473

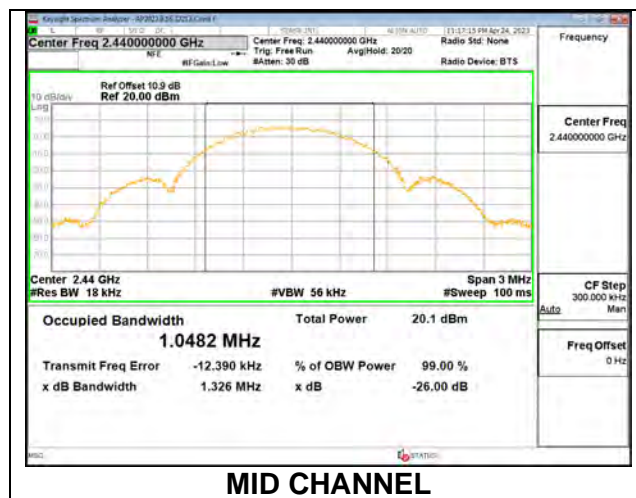

9.2.2. HIGH POWER BLE TXBF (1Mbps)

Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2402	1.0499	1.0459
Mid	2440	1.0472	1.0498
High	2480	1.0493	1.0497


Note: Test procedures and setting are same as BLE normal mode.

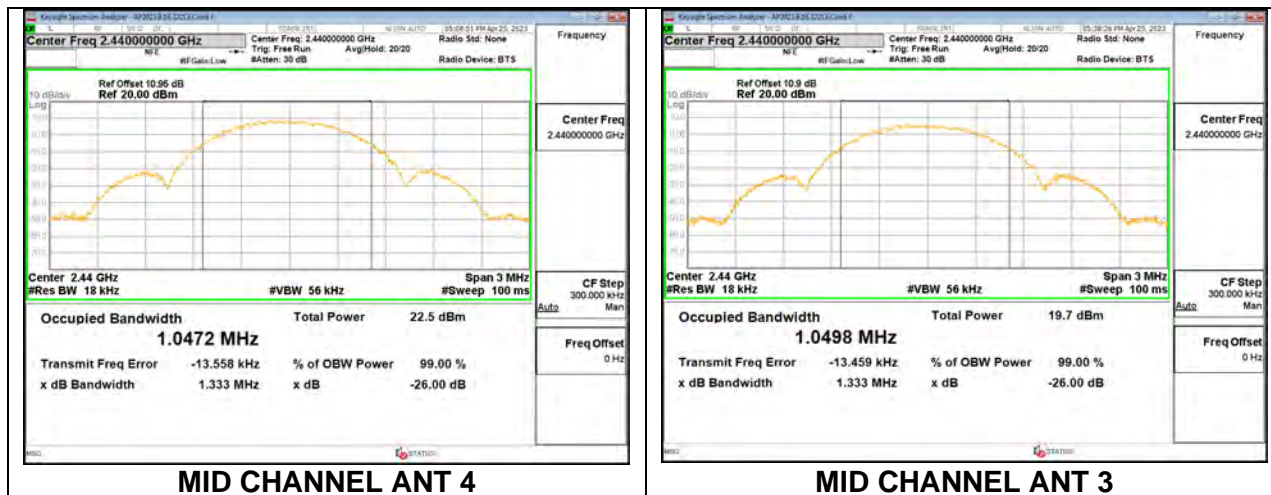

9.2.3. HIGH POWER BLE (2Mbps)


ANT 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	1.8874
Middle	2440	1.8877
High	2478	1.8823

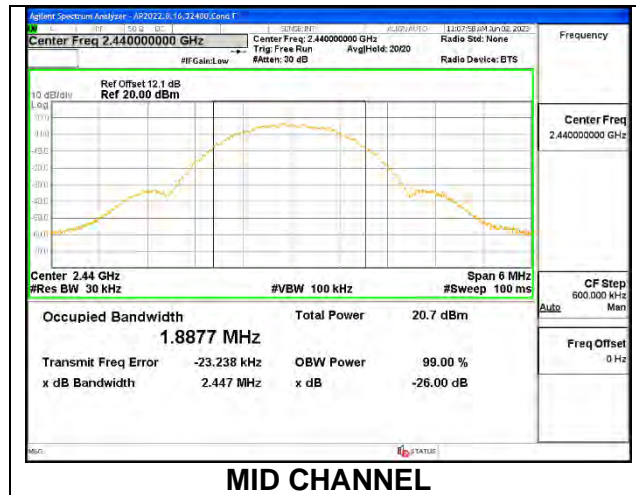

ANT 3


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2404	1.8857
Middle	2440	1.8878
High	2478	1.8844

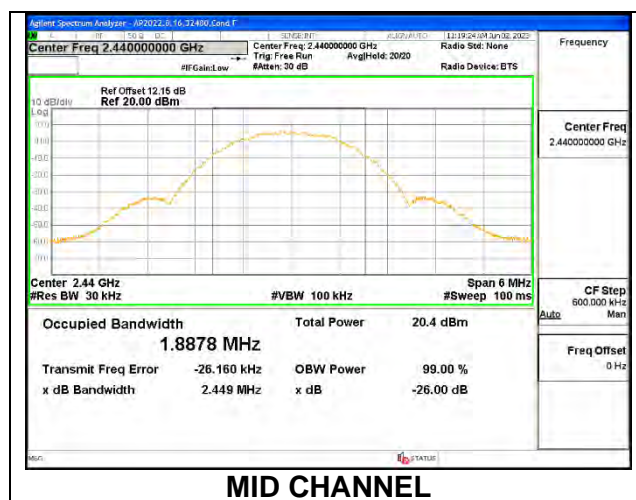

9.2.4. HIGH POWER BLE TXBF (2Mbps)

Channel	Frequency (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2404	1.8864	1.8855
Mid	2440	1.8857	1.8863
High	2478	1.8808	1.8868

Note: Test procedures and setting are same as BLE normal mode.

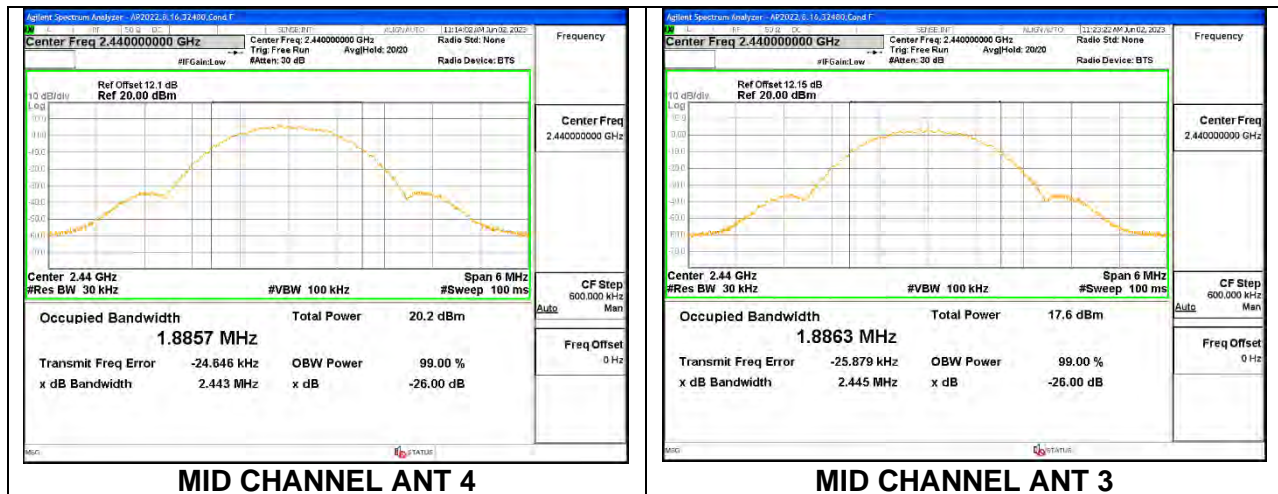

9.3. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


The 6dB bandwidth was measured for the narrowest bandwidth mode, High Power 1Mbps, to demonstrate compliance with the minimum required bandwidth of 500 kHz. Other modes were not tested as their bandwidth is greater than the High Power 1Mbps mode, as demonstrated by the 99% bandwidth measurements performed on all modes.

Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.3.1. HIGH POWER BLE (1Mbps)


ANT 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.732	0.5
Middle	2440	0.702	0.5
High	2480	0.678	0.5

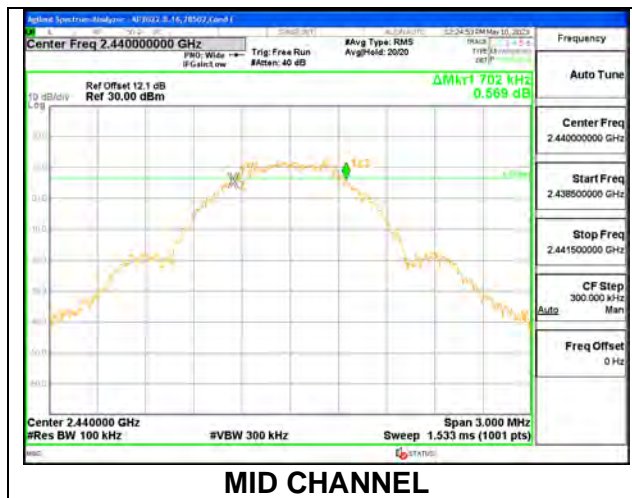


ANT 3

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.747	0.5
Middle	2440	0.702	0.5
High	2480	0.702	0.5

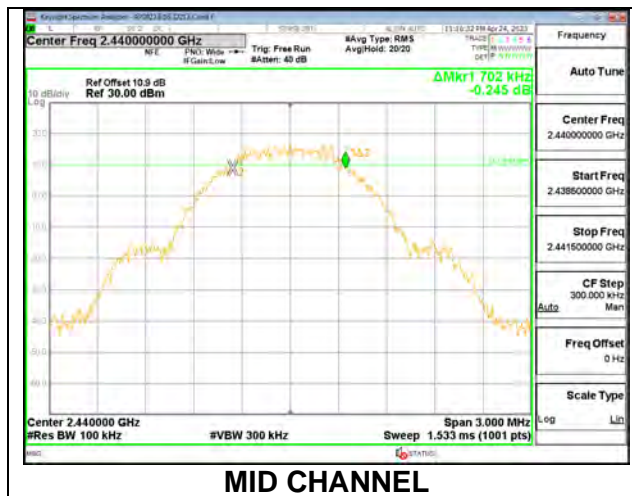

9.3.2. HIGH POWER BLE TXBF (1Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth ANT 4 (MHz)	6 dB Bandwidth ANT 3 (MHz)	Minimum Limit (MHz)
Low	2402	0.696	0.690	0.5
Mid	2440	0.681	0.708	0.5
High	2480	0.678	0.726	0.5

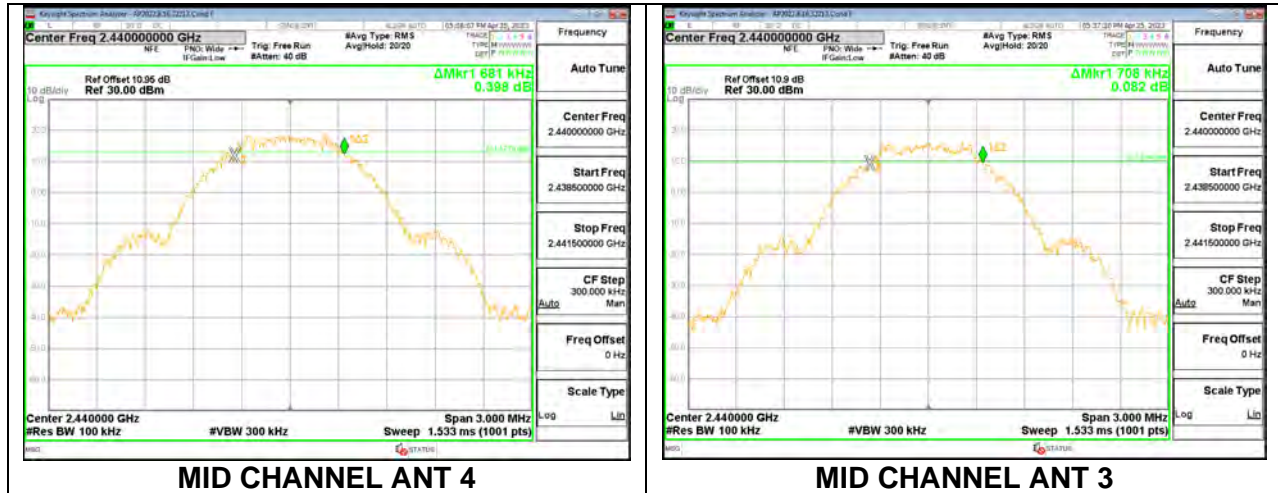

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

Measurements perform using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband peak power sensor. Peak output power was read directly from the power meter.

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2TX:

Tx chains are correlated for power and PSD due to the device supporting Beamforming mode. The directional gains are as follows:

Band (GHz)	ANT 4 Antenna Gain (dBi)	ANT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.4	-4	-1.5	-2.57	0.35

DIRECTIONAL GAIN CALCULATION:

ANSI C63.10-2013 section 14.4.3

Uncorrelated directional gain= $10 \cdot \text{LOG}((10^{(\text{Ant1}/10)} + 10^{(\text{Ant2}/10)})/2)$

Correlated directional Gain= $10 \cdot \text{LOG}(((10^{(\text{Ant1}/20)} + 10^{(\text{Ant2}/20)})^2)/2)$

Sample Calculation:

Ant4=-4, Ant3=-1.5

Uncorrelated Antenna gain= $10 \log[(10^{(-4.0/10)} + 10^{(-1.5/10)})/2] = -2.57 \text{dBi}$

Correlated Antenna gain= $10 \log[(10^{(-4.0/20)} + 10^{(-1.5/20)})^2/2] = 0.35 \text{dBi}$

RESULTS

9.4.1. **HIGH POWER BLE (1Mbps)**

ANT 4

Tested By:	32213 / 23560
Date:	4/24/2023

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.82	30	-9.18
Middle	2440	20.89	30	-9.11
High	2480	20.79	30	-9.21

ANT 3

Tested By:	32213 / 23560
Date:	4/24/2023

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	21.23	30	-8.77
Middle	2440	21.45	30	-8.55
High	2480	21.30	30	-8.70

9.4.2. **HIGH POWER BLE TXBF (1Mbps)**

ANT 4 + ANT 3

Tested By:	32213 / 23560
Date:	4/25/2023

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.69	21.05	23.88	30	-6.12
Middle	2440	20.83	21.08	23.97	30	-6.03
High	2480	20.92	21.16	24.05	30	-5.95

9.4.3. **HIGH POWER BLE (2Mbps)****ANT 4**

Date:	4/24/2023
--------------	-----------

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	21.09	30	-8.91
Middle	2440	21.19	30	-8.81
High	2478	20.92	30	-9.08

ANT 3

Tested By:	32213
Date:	4/24/2023

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	21.10	30	-8.90
Middle	2440	21.50	30	-8.50
High	2478	21.69	30	-8.31

9.4.4. **HIGH POWER BLE TXBF (2Mbps)****ANT 4 + ANT 3**

Tested By:	32213
Date:	4/25/2023

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	20.88	21.04	23.97	30	-6.03
Middle	2440	21.01	21.01	24.02	30	-5.98
High	2478	21.16	21.28	24.23	30	-5.77

9.4.5. **LOW POWER BLE (1Mbps)****ANT 4**

Tested By:	32213
Date:	5/3/2023

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.91	30	-18.09
Middle	2440	11.60	30	-18.40
High	2480	11.72	30	-18.28

ANT 3

Tested By:	32213
Date:	5/3/2023

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.80	30	-18.20
Middle	2440	11.60	30	-18.40
High	2480	11.95	30	-18.05

9.4.6. **LOW POWER BLE TXBF (1Mbps)****ANT 4 + ANT 3**

Tested By:	32213
Date:	5/3/2023

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.77	11.90	14.85	30	-15.15
Middle	2440	11.76	11.85	14.82	30	-15.18
High	2480	11.60	11.99	14.81	30	-15.19

9.4.7. **LOW POWER BLE (2Mbps)****ANT 4**

Tested By:	32213
Date:	5/3/2023

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	11.99	30	-18.01
Middle	2440	12.19	30	-17.81
High	2478	11.80	30	-18.20

ANT 3

Tested By:	32213
Date:	5/3/2023

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2404	11.67	30	-18.33
Middle	2440	12.17	30	-17.83
High	2478	11.77	30	-18.23

9.4.8. **LOW POWER BLE TXBF (2Mbps)****ANT 4 + ANT 3**

Tested By:	32213
Date:	5/3/2023

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2404	11.88	12.29	15.10	30	-14.90
Middle	2440	12.28	11.72	15.02	30	-14.98
High	2478	11.75	12.32	15.05	30	-14.95

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

RESULTS

9.5.1. **HIGH POWER BLE (1Mbps)**

ANT 4

Tested By:	32213 / 23560
Date:	6/30/2023

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	20.45
Middle	2440	20.49
High	2480	20.44

ANT 3

Tested By:	32213 / 23560
Date:	5/30/2023

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	20.84
Middle	2440	20.99
High	2480	20.87

9.5.2. **HIGH POWER BLE TXBF (1Mbps)**

ANT 4 + ANT 3

Tested By:	32213 / 23560
Date:	6/30/2023

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	20.32	20.85	23.60
Middle	2440	20.44	20.90	23.69
High	2480	20.49	20.97	23.75

9.5.3. **HIGH POWER BLE (2Mbps)**

ANT 4

Tested By:	32213 / 23560
Date:	6/30/2023

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	20.33
Middle	2440	20.49
High	2480	20.09

ANT 3

Tested By:	32213 / 23560
Date:	6/30/2023

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	20.66
Middle	2440	20.99
High	2480	20.89

9.5.4. **HIGH POWER BLE TXBF (2Mbps)**

ANT 4 + ANT 3

Tested By:	32213 / 23560
Date:	6/30/2023

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	20.31	20.75	23.55
Middle	2440	20.42	20.82	23.63
High	2480	20.48	20.96	23.74

9.5.5. **LOW POWER BLE (1Mbps)****ANT 4**

Tested By:	32213 / 23560
Date:	6/30/2023

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	11.49
Middle	2440	11.23
High	2480	11.33

ANT 3

Tested By:	32213 / 23560
Date:	6/30/2023

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	11.42
Middle	2440	11.24
High	2480	11.48

9.5.6. **LOW POWER BLE TXBF (1Mbps)****ANT 4 + ANT 3**

Tested By:	32213 / 23560
Date:	6/30/2023

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	11.48	11.49	14.50
Middle	2440	11.40	11.10	14.26
High	2480	11.30	11.50	14.41

9.5.7. **LOW POWER BLE (2Mbps)**

ANT 4

Tested By:	32213 / 23560
Date:	6/30/2023

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	11.24
Middle	2440	11.49
High	2478	11.40

ANT 3

Tested By:	32213 / 23560
Date:	6/30/2023

Channel	Frequency (MHz)	AV power (dBm)
Low	2404	11.18
Middle	2440	11.49
High	2478	11.48

9.5.8. **LOW POWER BLE TXBF (2Mbps)**

ANT 4 + ANT 3

Tested By:	32213 / 23560
Date:	6/30/2023

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2404	11.09	11.39	14.25
Middle	2440	11.49	11.17	14.34
High	2478	11.08	11.49	14.30

9.6. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS


Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

Only High-Power modes result is reported, it covers all Low Power modes

9.6.1. HIGH POWER BLE (1Mbps)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	4.126	8	-3.87
Middle	2440	4.290	8	-3.71
High	2480	3.923	8	-4.08

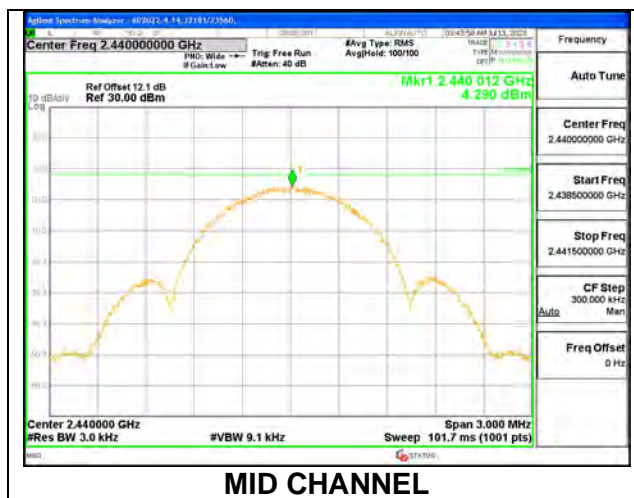

ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	3.981	8	-4.02
Middle	2440	4.119	8	-3.88
High	2480	3.974	8	-4.03

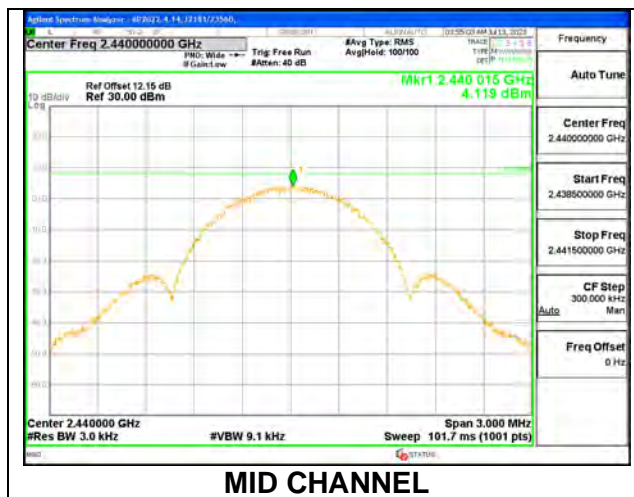


9.6.2. HIGH POWER BLE TXBF (1Mbps)

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	ANT 4 Meas (dBm/3kHz)	ANT 3 Meas (dBm/3kHz)	Total Corr'd PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	4.283	3.740	7.03	8.0	-1.0
Mid	2440	4.464	3.828	7.17	8.0	-0.8
Hjigh	2480	4.472	4.296	7.40	8.0	-0.6


Note: Test procedures and setting are same as BLE normal mode.

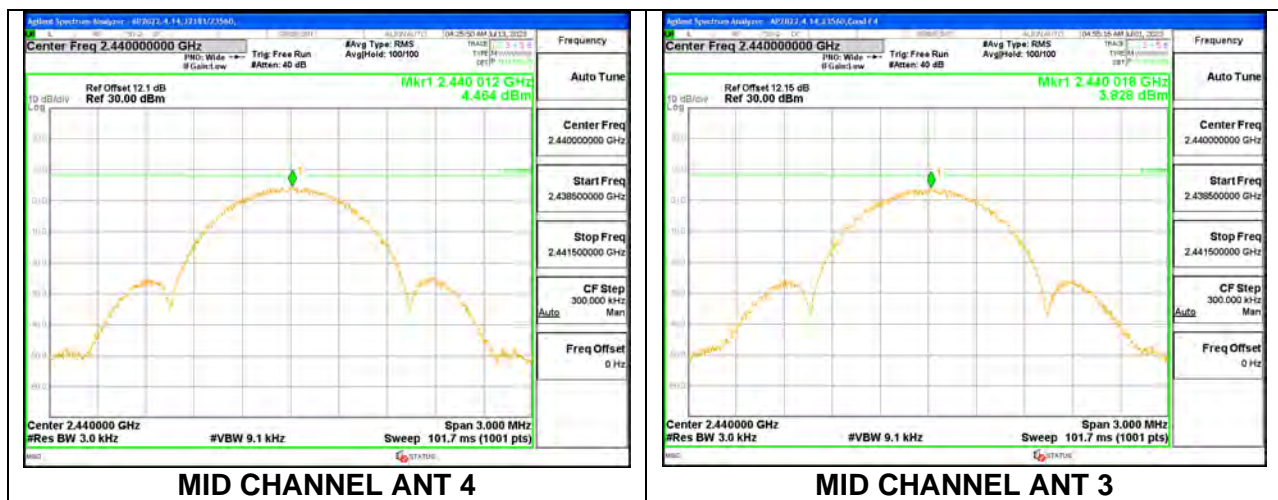

9.6.3. HIGH POWER BLE (2Mbps)


ANT 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-1.178	8	-9.18
Middle	2440	-1.040	8	-9.04
High	2478	-1.435	8	-9.44

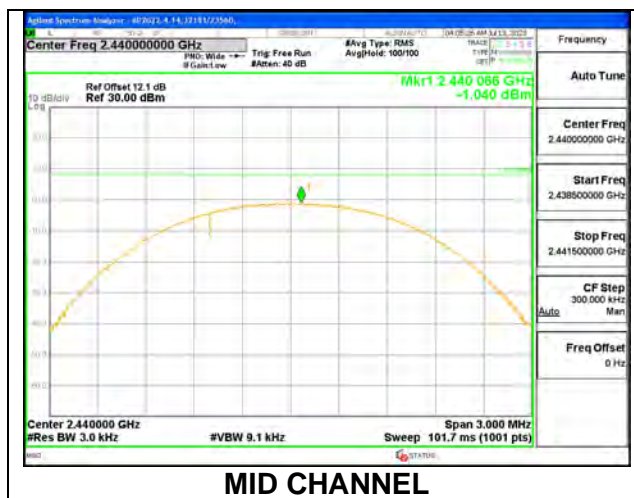

ANT 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2404	-1.387	8	-9.39
Middle	2440	-0.902	8	-8.90
High	2478	-1.046	8	-9.05

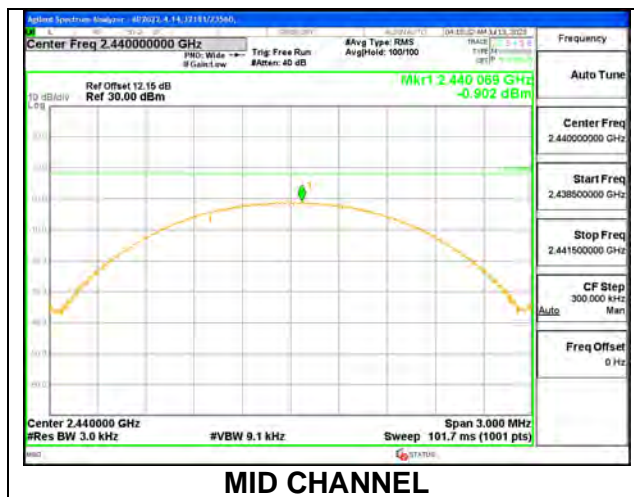


9.6.4. HIGH POWER BLE TXBF (2Mbps)

Duty Cycle CF (dB)	Included in Calculations of Corr'd PSD
--------------------	--

PSD Results

Channel	Frequency (MHz)	ANT 4 Meas (dBm/3kHz)	ANT 3 Meas (dBm/3kHz)	Total Corr'd PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-1.299	-1.310	1.71	8.0	-6.3
Mid	2440	-1.017	-1.644	1.69	8.0	-6.3
Hjigh	2478	-0.697	-1.357	2.00	8.0	-6.0

Note: Test procedures and setting are same as BLE normal mode.

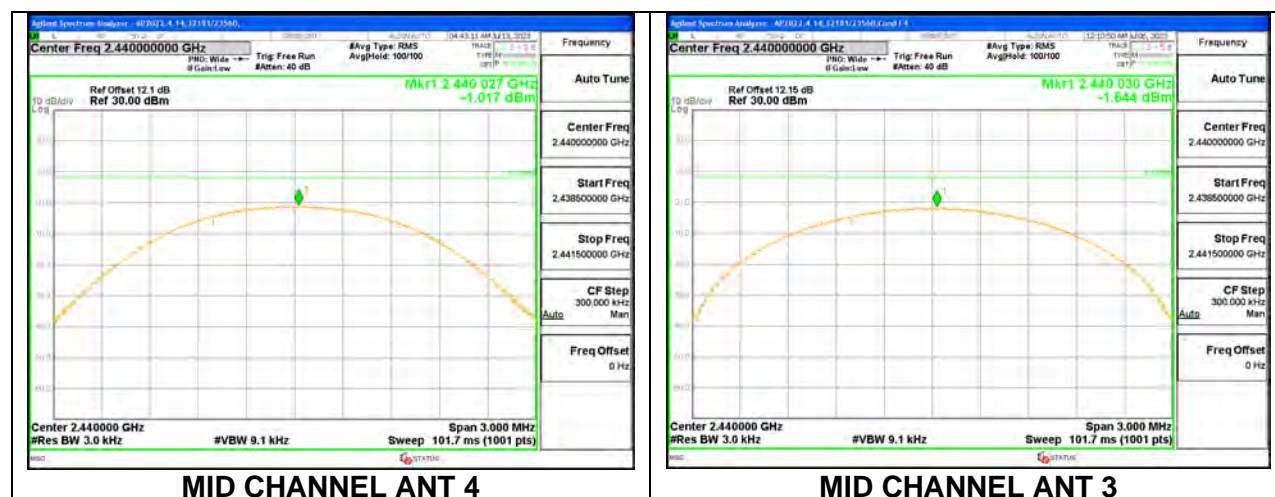

9.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 5.5


Output power was measured based on the use of a peak measurement; therefore the required attenuation is 20 dBc.

Note: Test procedures and setting are same as BLE normal mode.


RESULTS

9.7.1. HIGH POWER BLE (1Mbps)

ANT 4

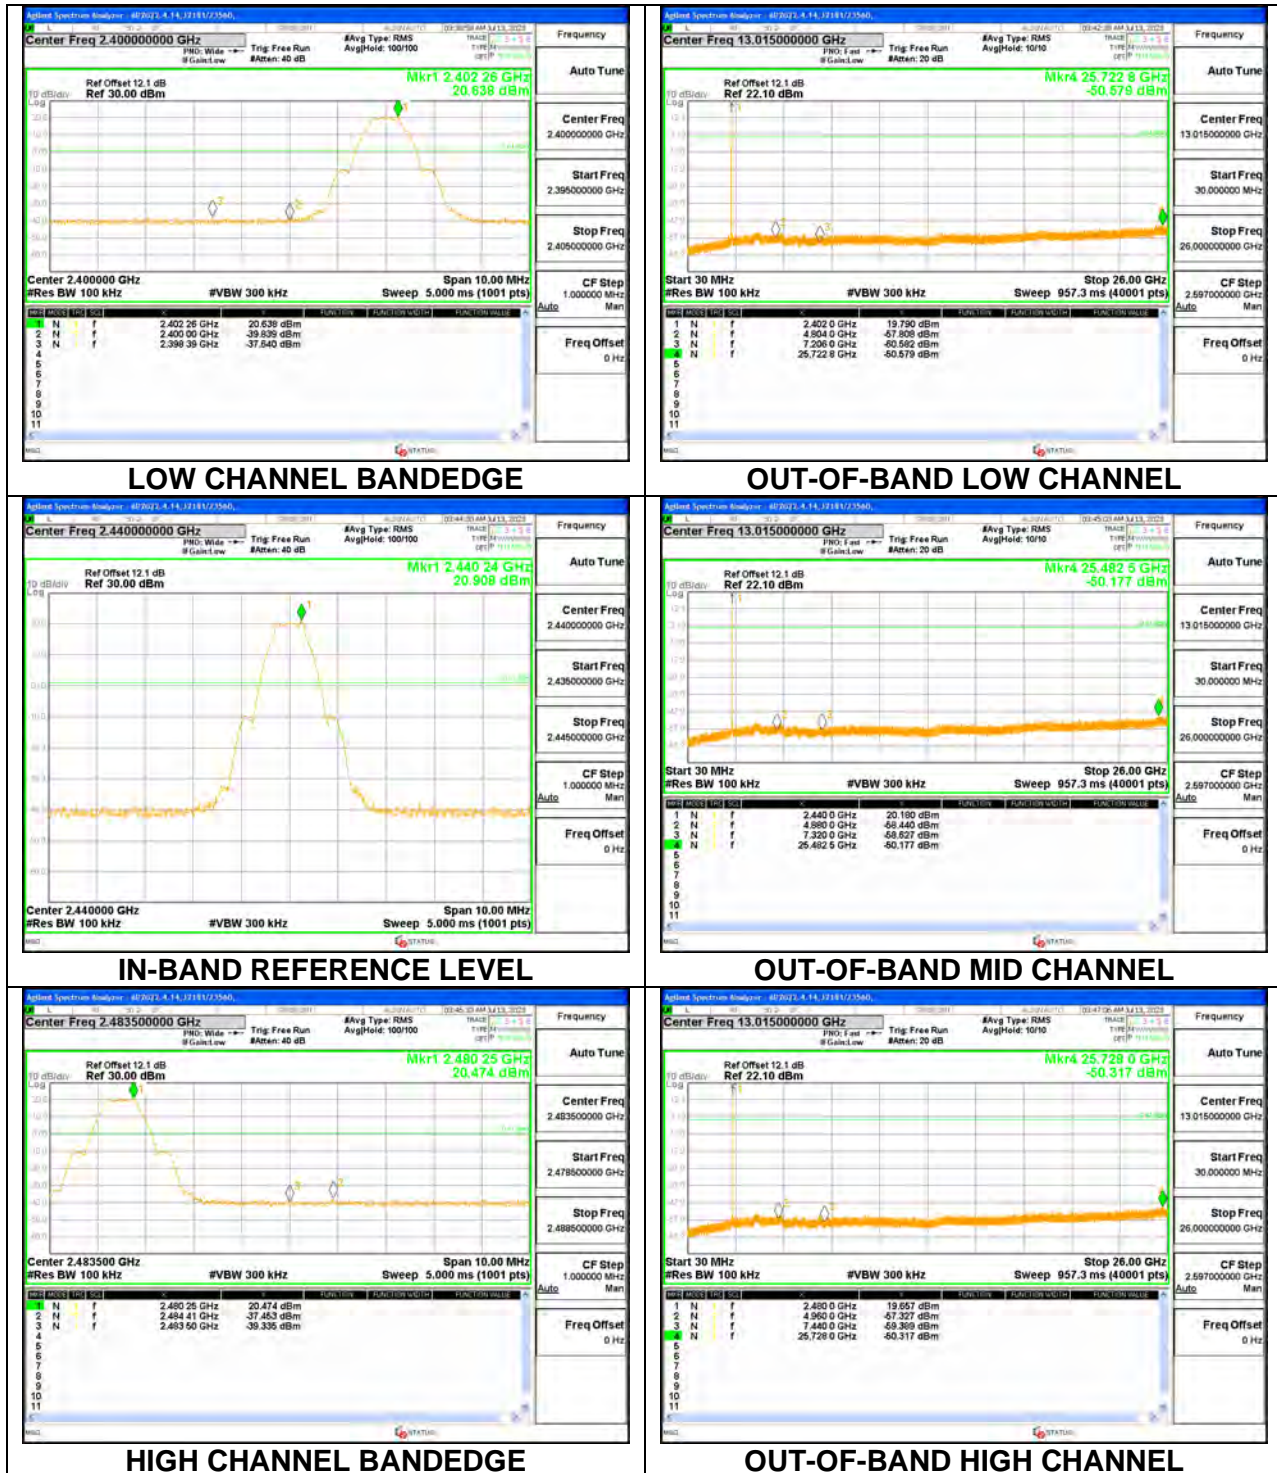


ANT 3

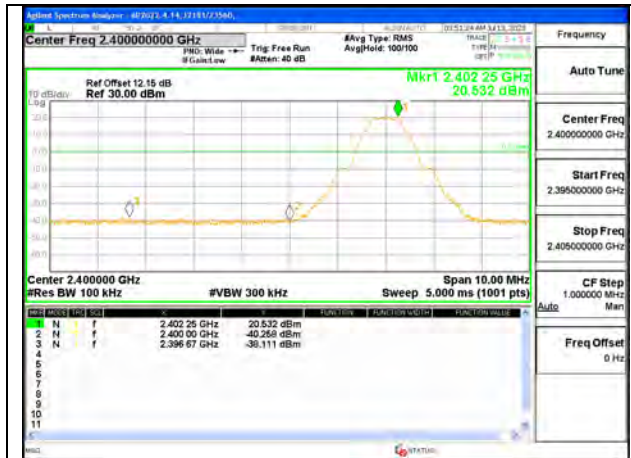

LOW CHANNEL BANDEDGE



OUT-OF-BAND LOW CHANNEL

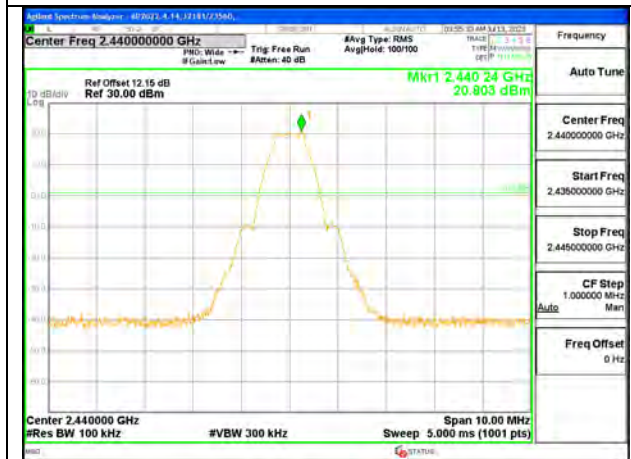

IN-BAND REFERENCE LEVEL



OUT-OF-BAND MID CHANNEL




HIGH CHANNEL BANDEDGE




OUT-OF-BAND HIGH CHANNEL

9.7.2. HIGH POWER BLE TXBF (1Mbps)


Note: Test procedures and setting are same as BLE normal mode.

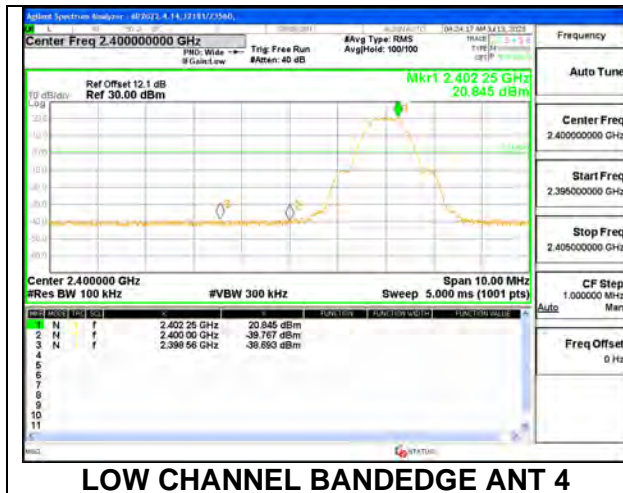


LOW CHANNEL BANDEDGE ANT 4

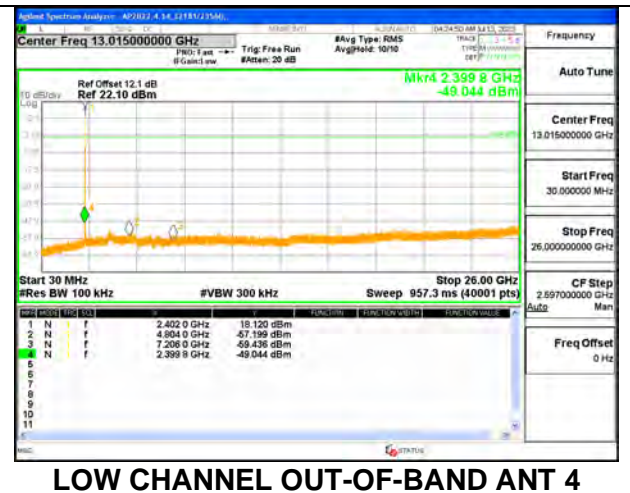


LOW CHANNEL OUT-OF-BAND ANT 4

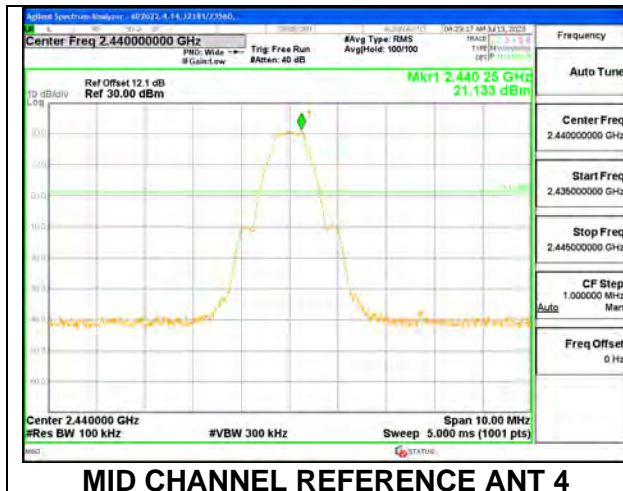


MID CHANNEL REFERENCE ANT 4

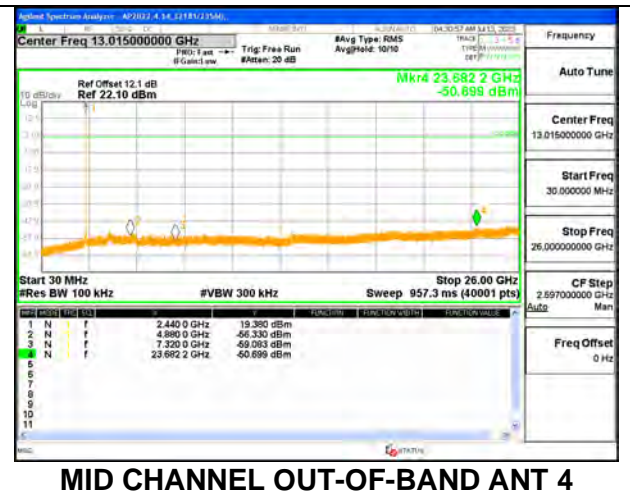

MID CHANNEL OUT-OF-BAND ANT 4






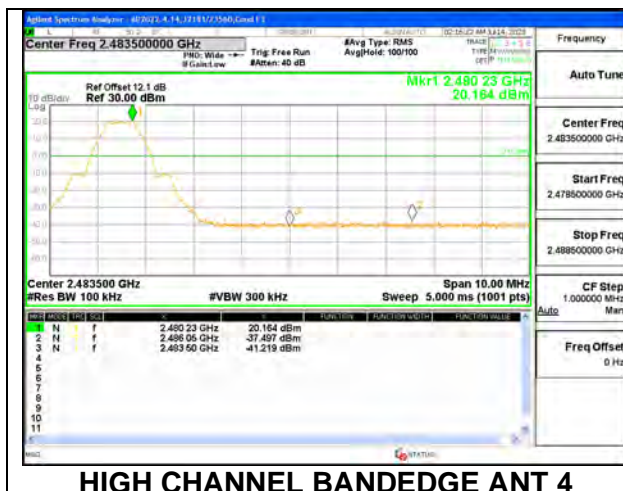


HIGH CHANNEL BANDEDGE ANT 4

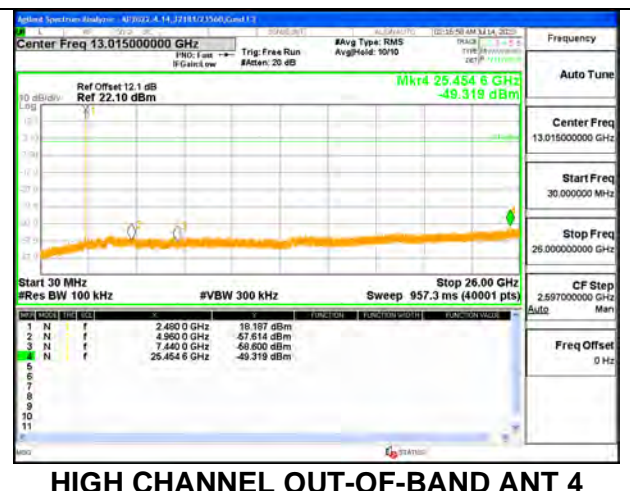


HIGH CHANNEL OUT-OF-BAND ANT 4

HIGH POWER (1Mbps)

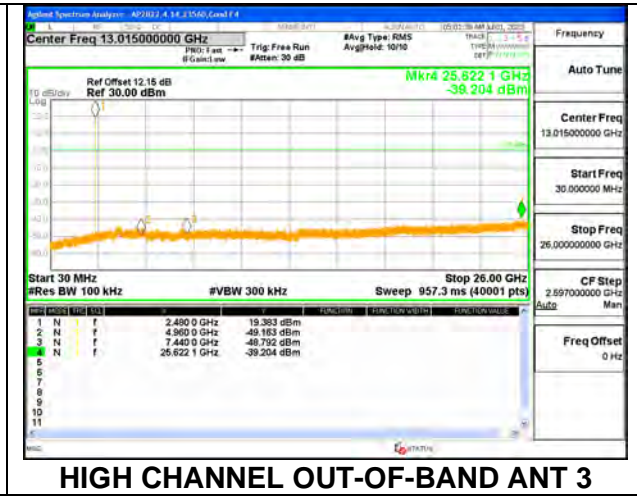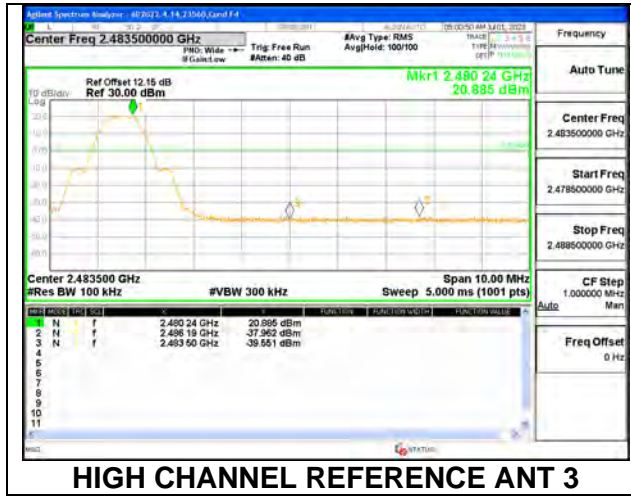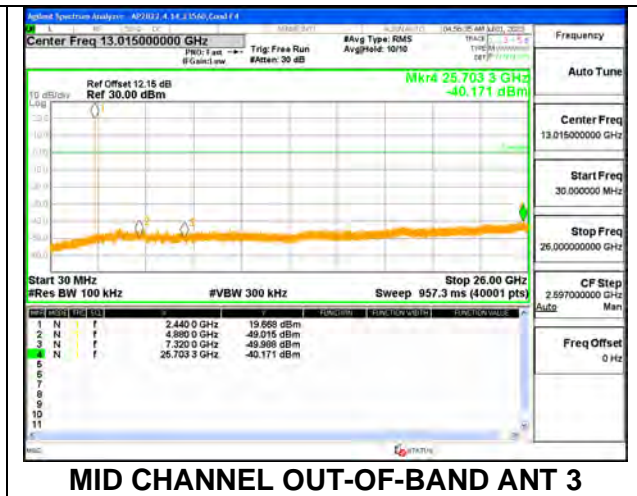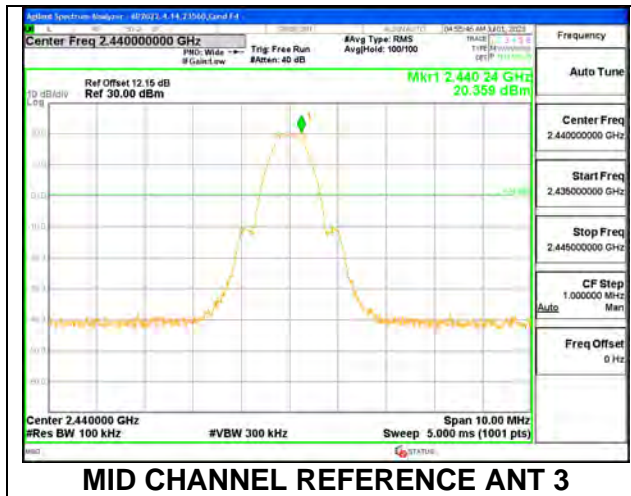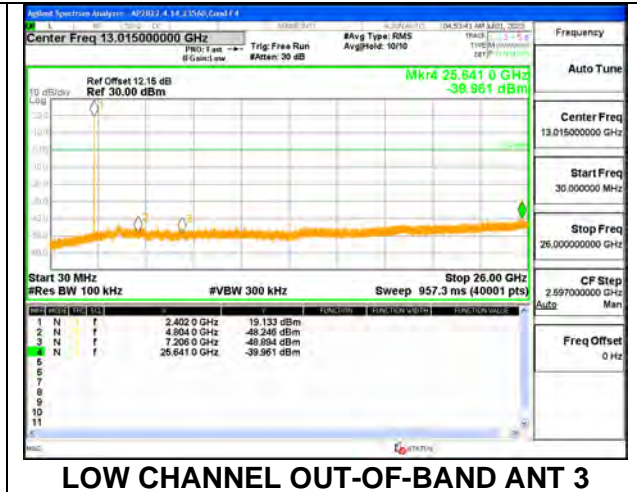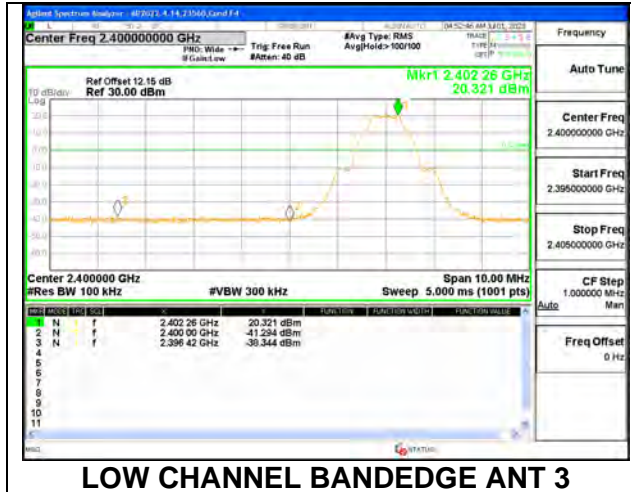


9.7.3. HIGH POWER BLE (2Mbps)

ANT 4

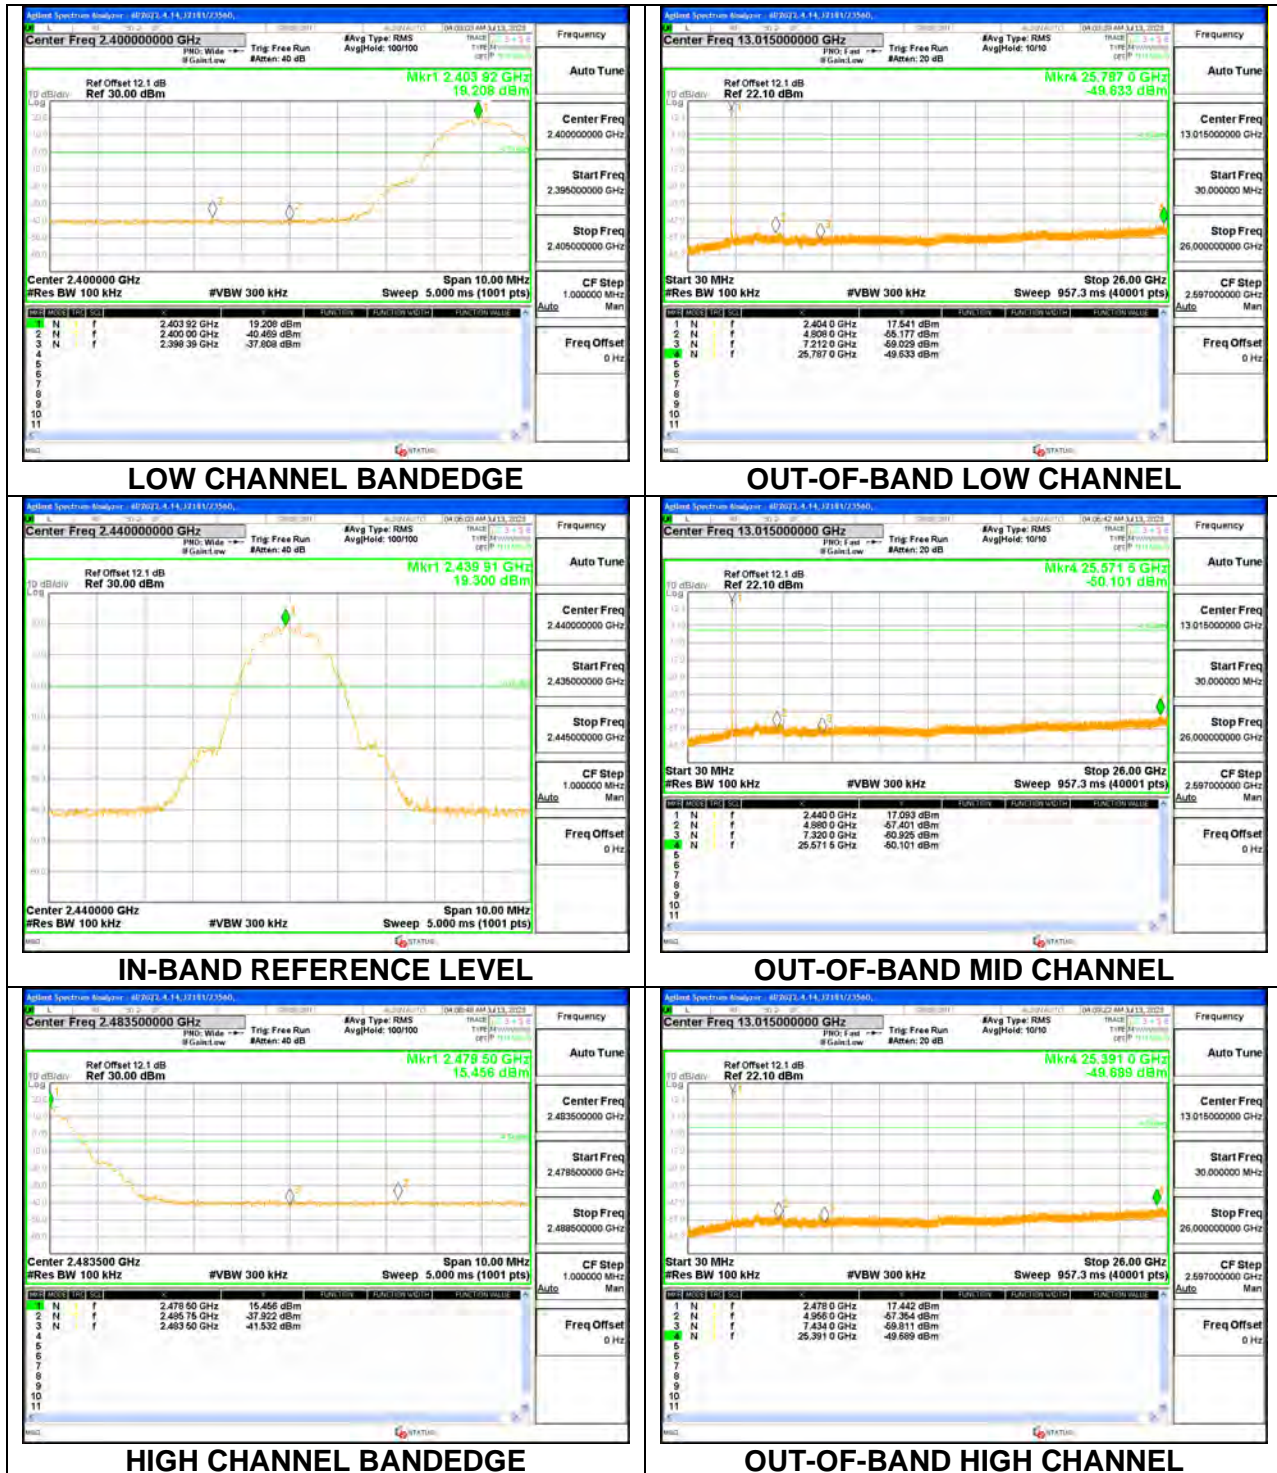


ANT 3

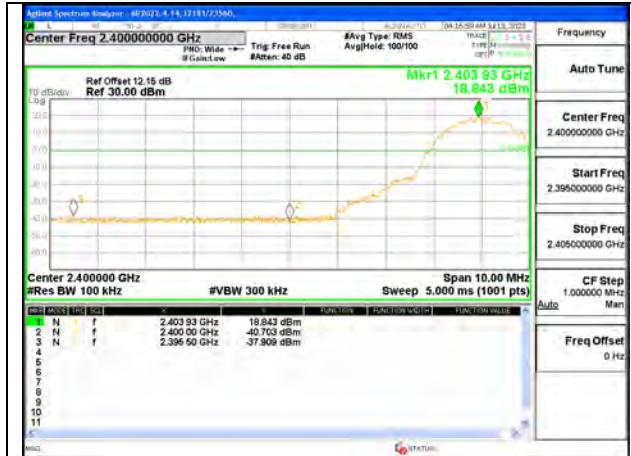

LOW CHANNEL BANDEDGE



OUT-OF-BAND LOW CHANNEL

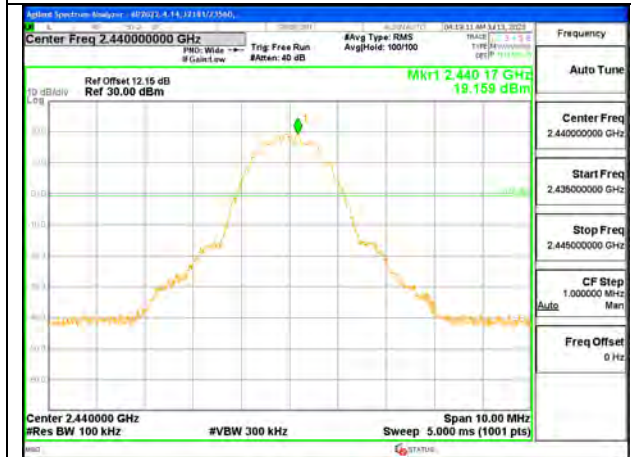

IN-BAND REFERENCE LEVEL



OUT-OF-BAND MID CHANNEL



HIGH CHANNEL BANDEDGE




OUT-OF-BAND HIGH CHANNEL


9.7.4. HIGH POWER BLE TXBF (2Mbps)

Note: Test procedures and setting are same as BLE normal mode.


ANT 4

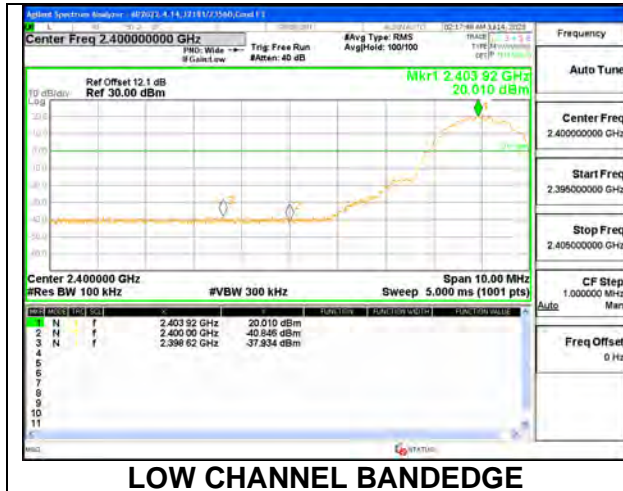


LOW CHANNEL BANDEDGE

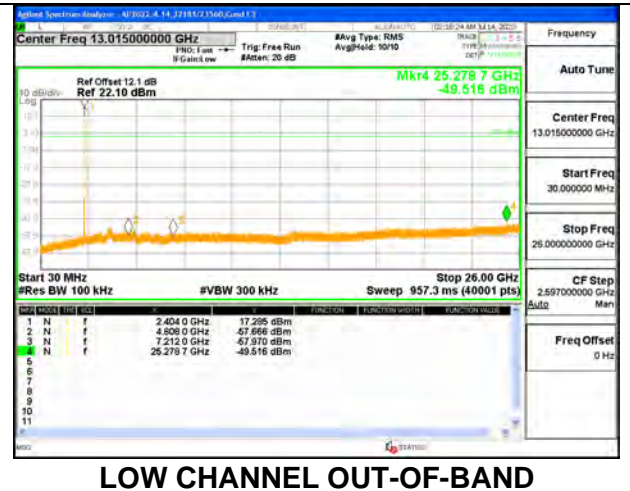


LOW CHANNEL OUT-OF-BAND

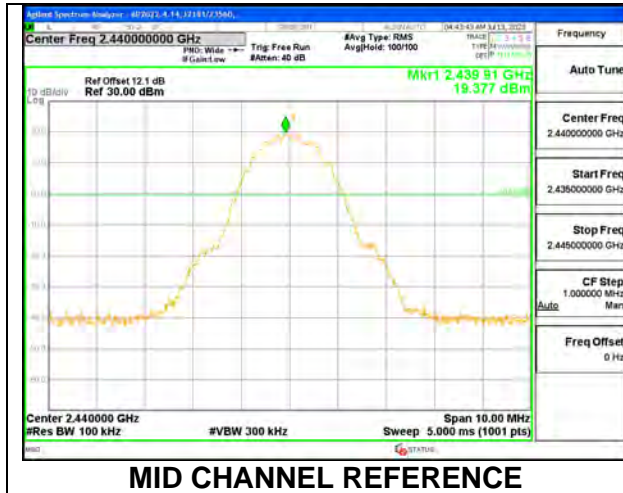


MID CHANNEL REFERENCE

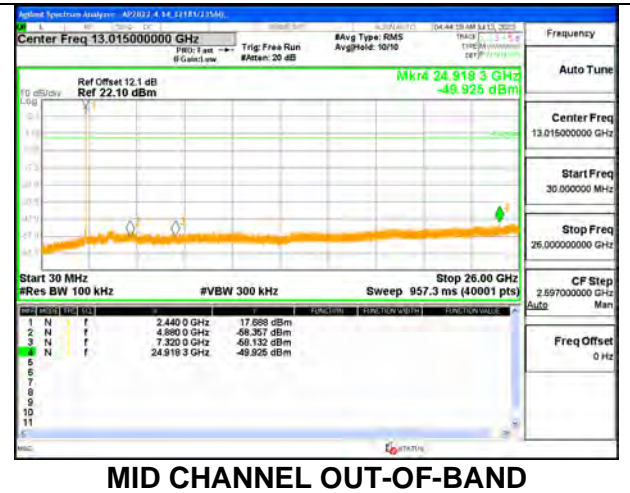

MID CHANNEL OUT-OF-BAND

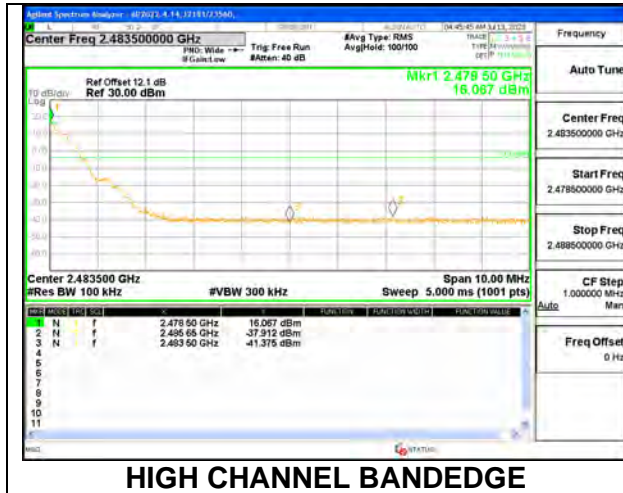


HIGH CHANNEL BANDEDGE

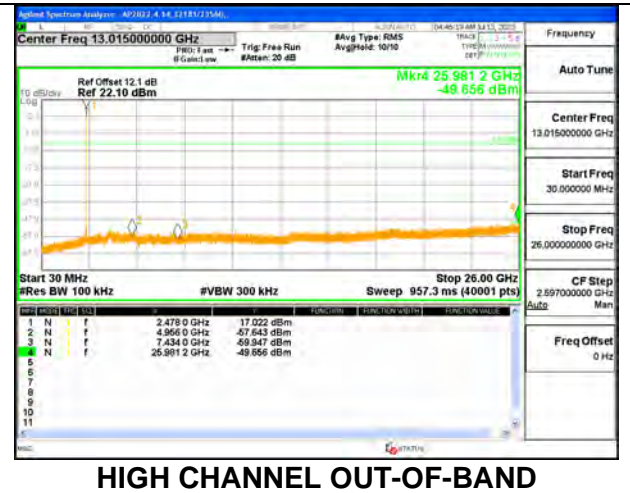


HIGH CHANNEL OUT-OF-BAND


ANT 3

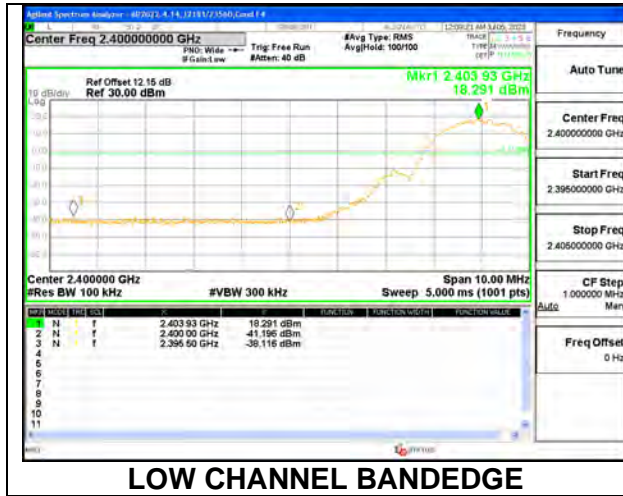


LOW CHANNEL BANDEDGE

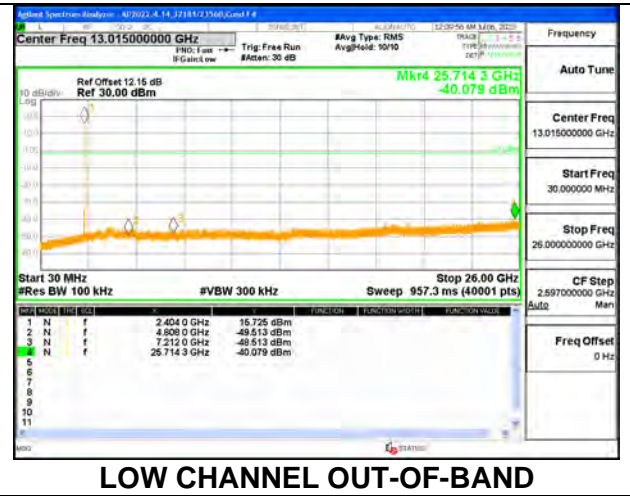


LOW CHANNEL OUT-OF-BAND

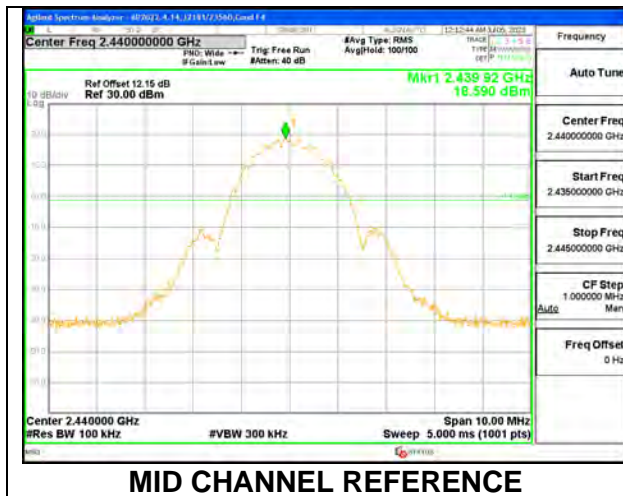


MID CHANNEL REFERENCE

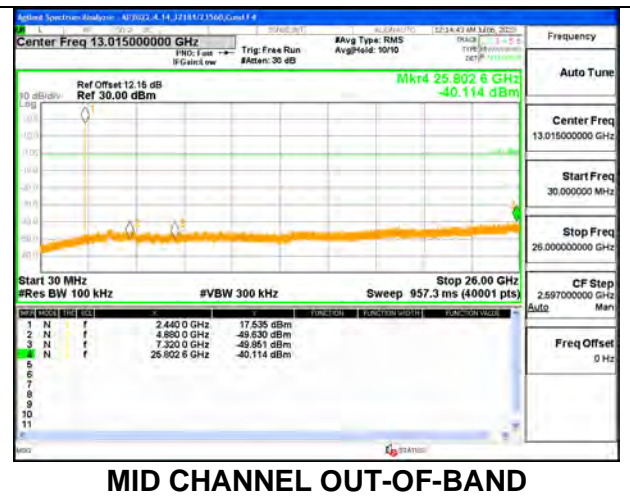

MID CHANNEL OUT-OF-BAND

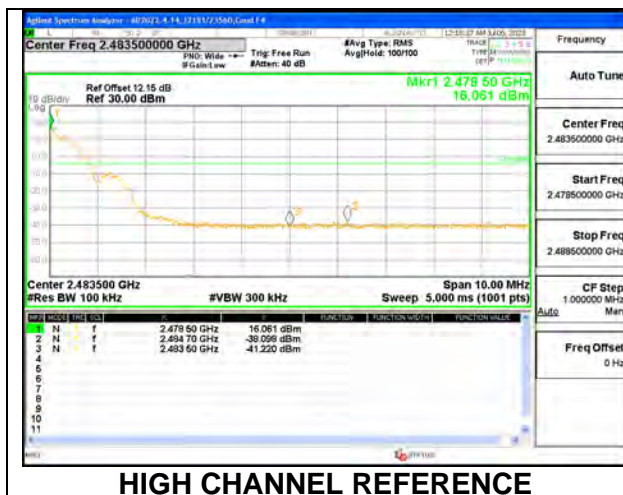

HIGH CHANNEL REFERENCE

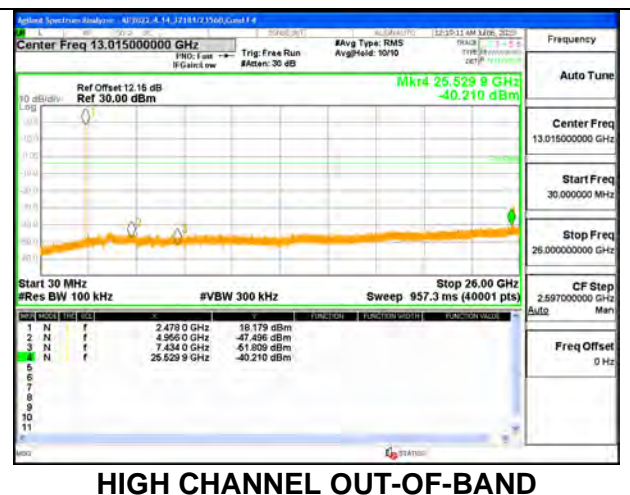


HIGH CHANNEL OUT-OF-BAND


9.7.5. **LOW POWER BLE (1Mbps)**
ANT 4




LOW CHANNEL BANDEDGE

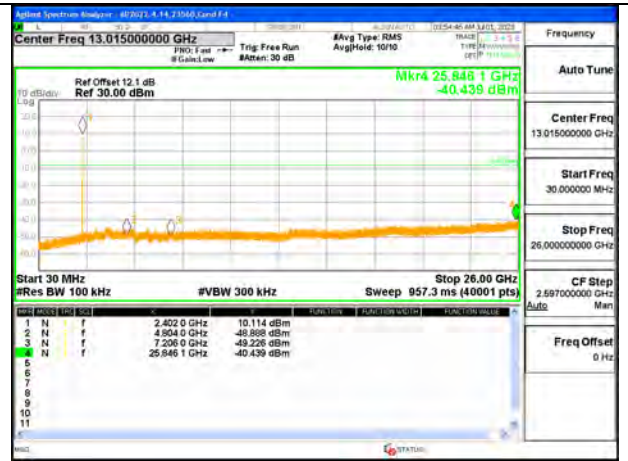

OUT-OF-BAND LOW CHANNEL

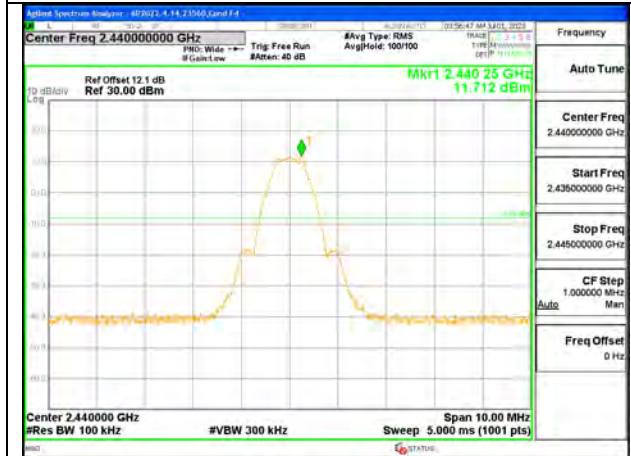

IN-BAND REFERENCE LEVEL

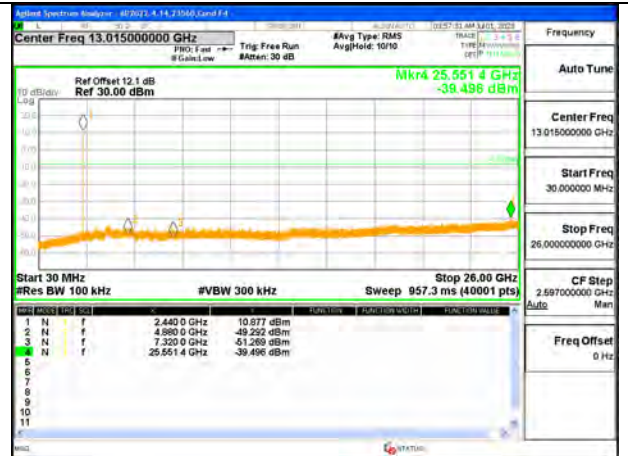

OUT-OF-BAND MID CHANNEL



HIGH CHANNEL BANDEDGE




OUT-OF-BAND HIGH CHANNEL


ANT 3




LOW CHANNEL BANDEDGE

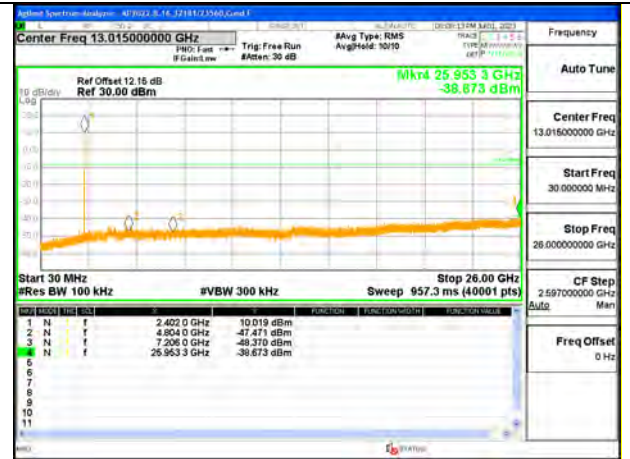

OUT-OF-BAND LOW CHANNEL

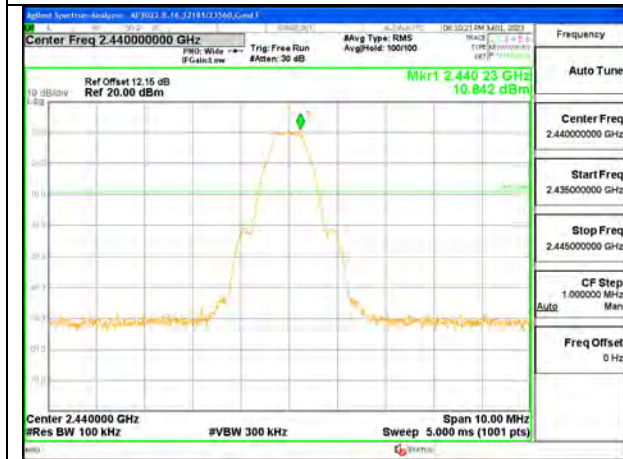

IN-BAND REFERENCE LEVEL

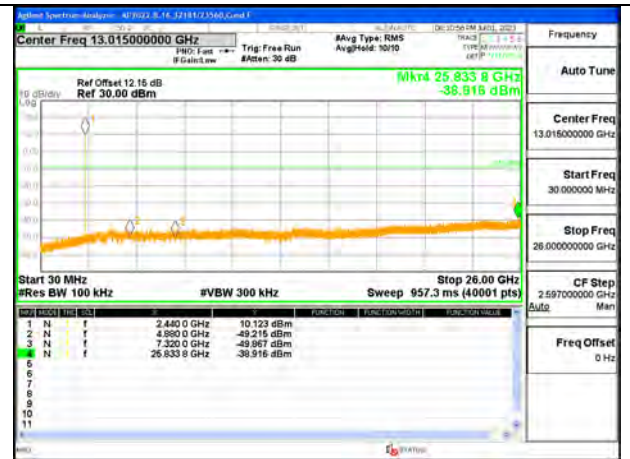

OUT-OF-BAND MID CHANNEL



HIGH CHANNEL BANDEDGE




OUT-OF-BAND HIGH CHANNEL


9.7.6. LOW POWER BLE TXBF (1Mbps)

Note: Test procedures and setting are same as BLE normal mode.


ANT 4

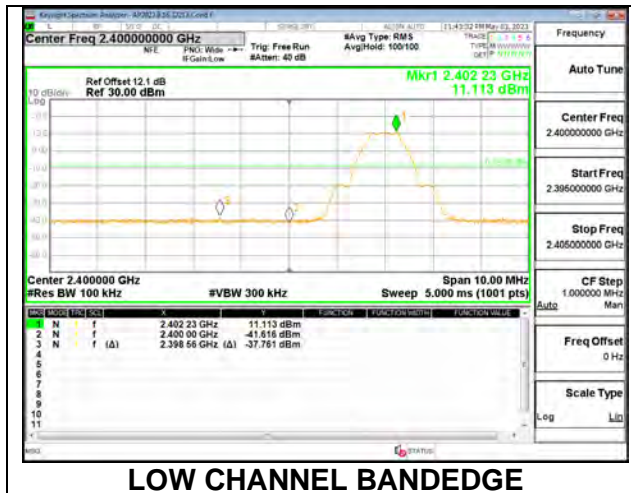


LOW CHANNEL BANDEDGE

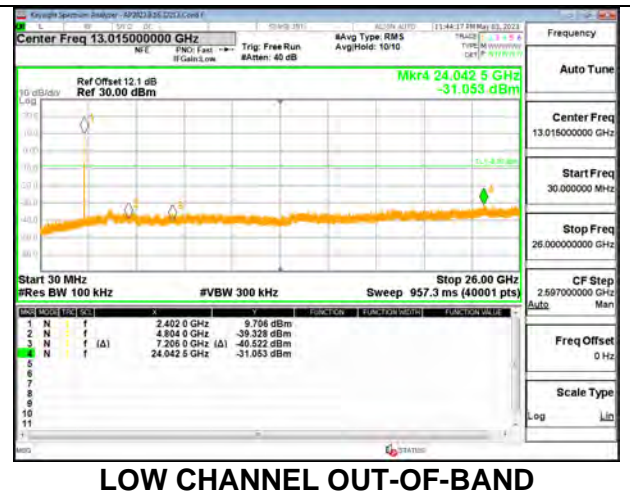


LOW CHANNEL OUT-OF-BAND

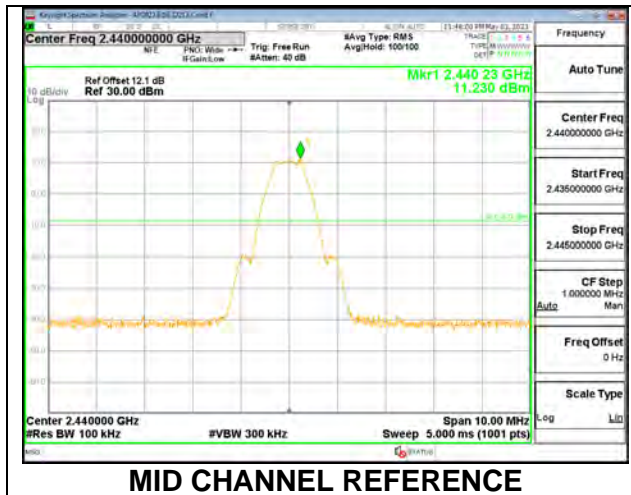


MID CHANNEL REFERENCE

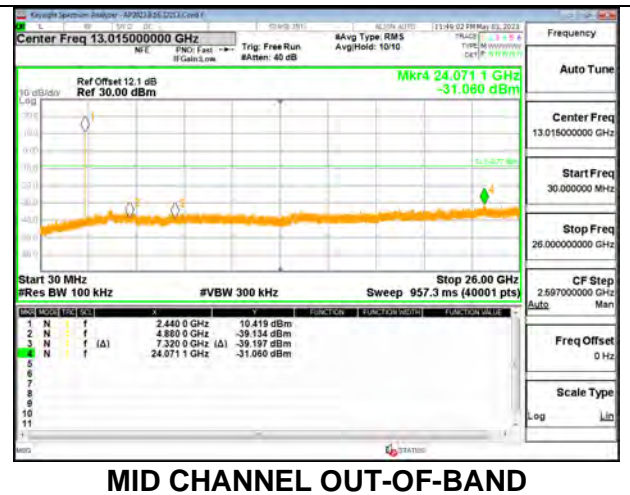

MID CHANNEL OUT-OF-BAND






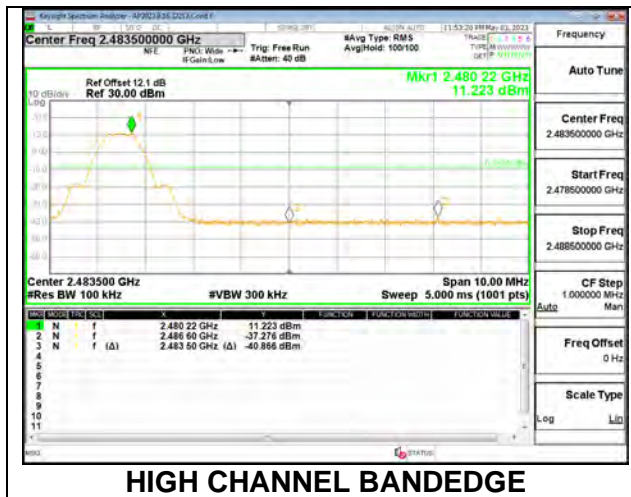


HIGH CHANNEL BANDEDGE

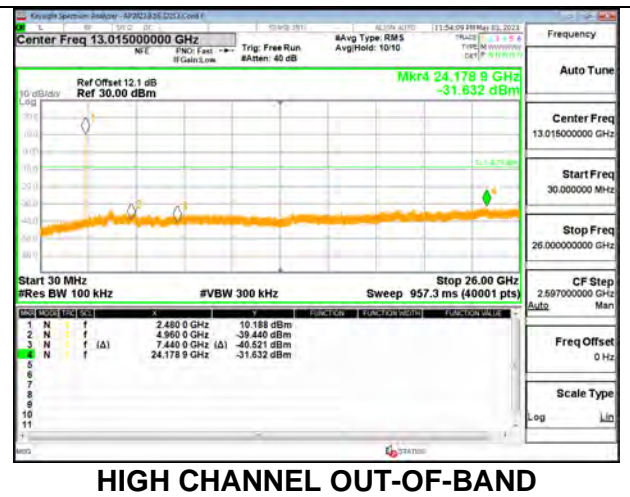


HIGH CHANNEL OUT-OF-BAND

ANT 3

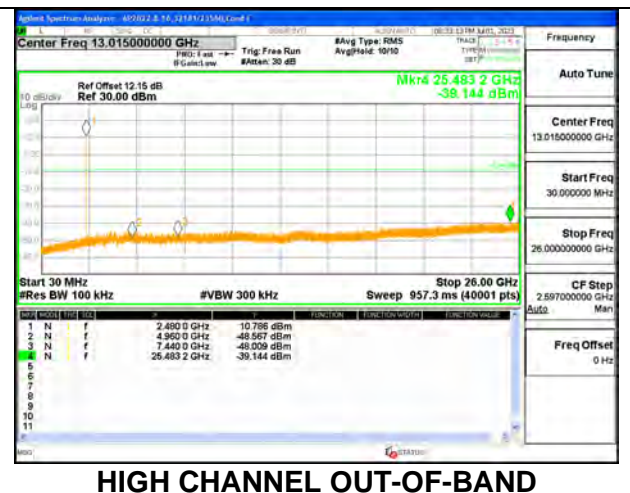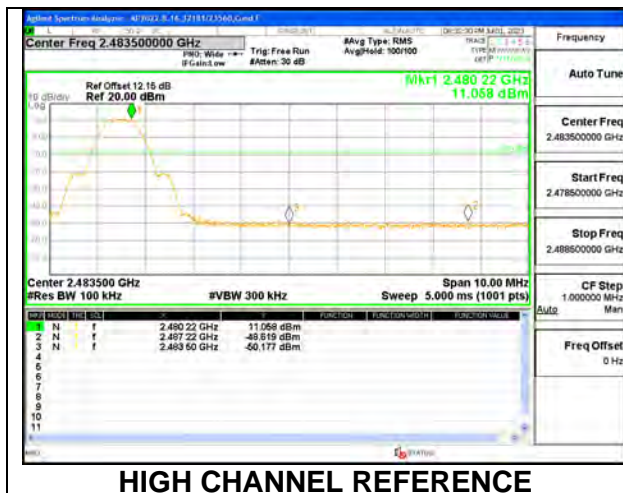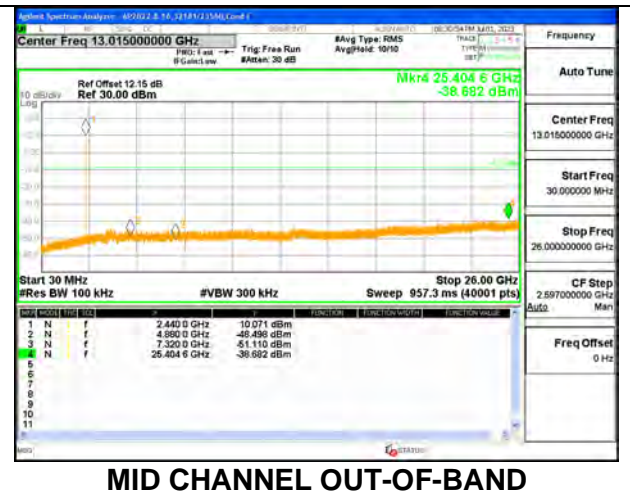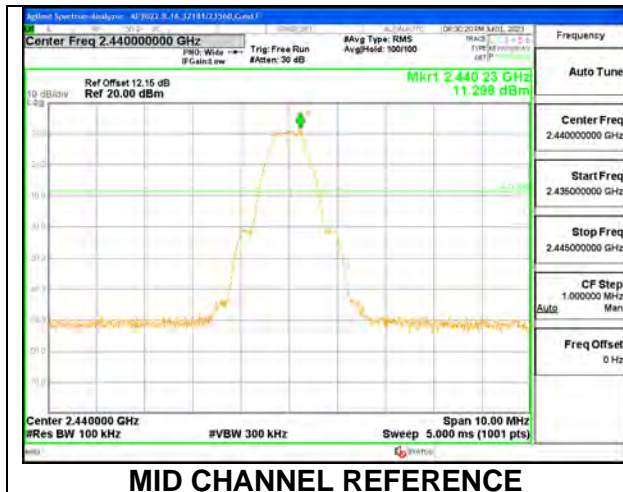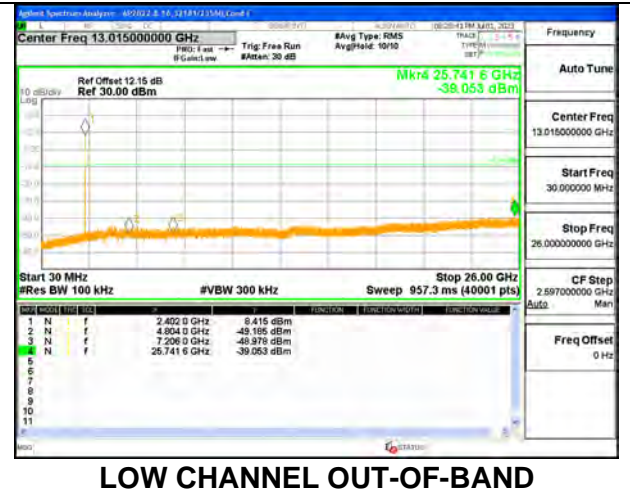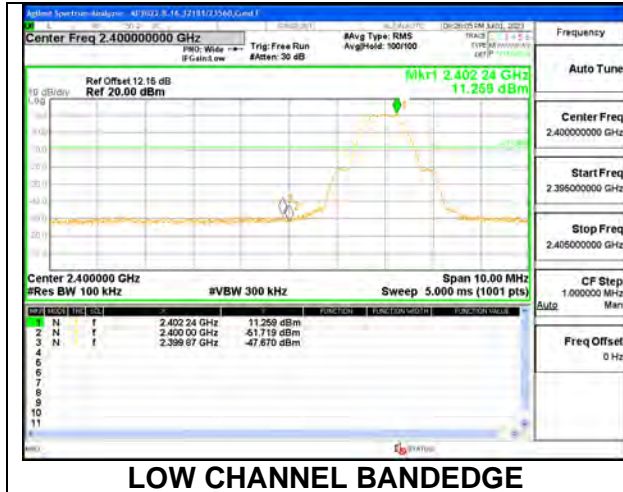


9.7.7. LOW POWER BLE (2Mbps) ANT 4

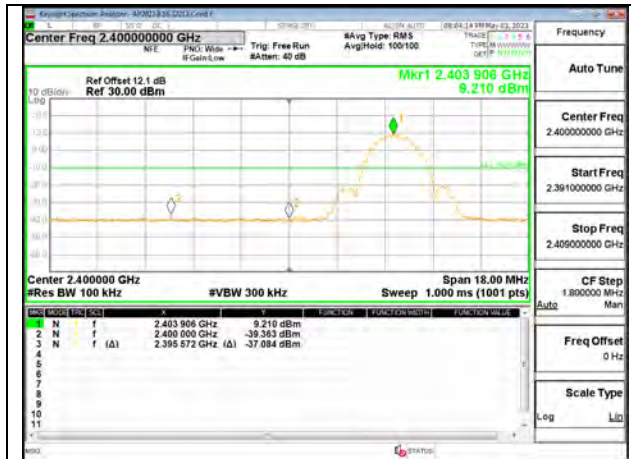


LOW CHANNEL BANDEDGE




OUT-OF-BAND LOW CHANNEL

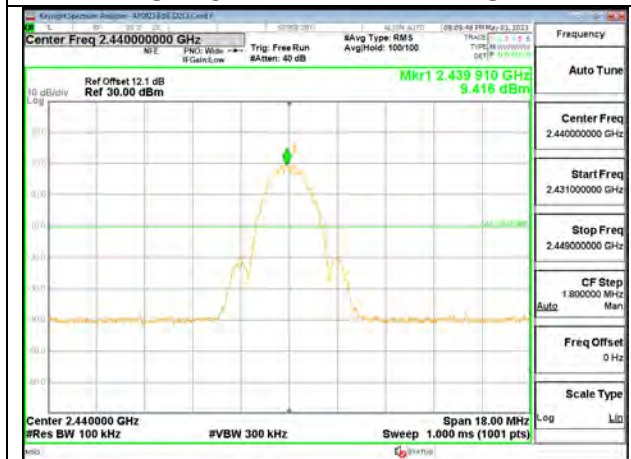

IN-BAND REFERENCE LEVEL

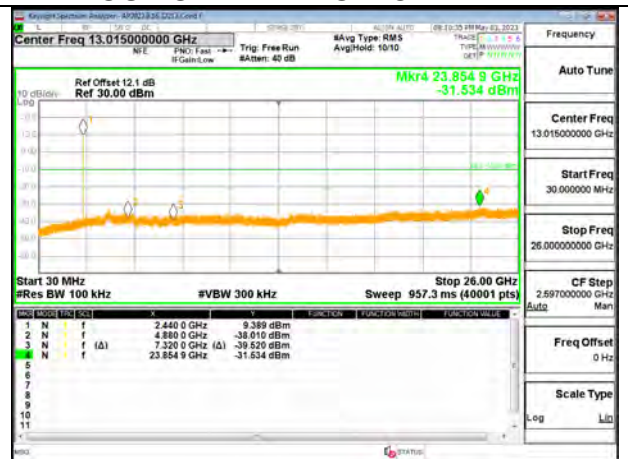

OUT-OF-BAND MID CHANNEL

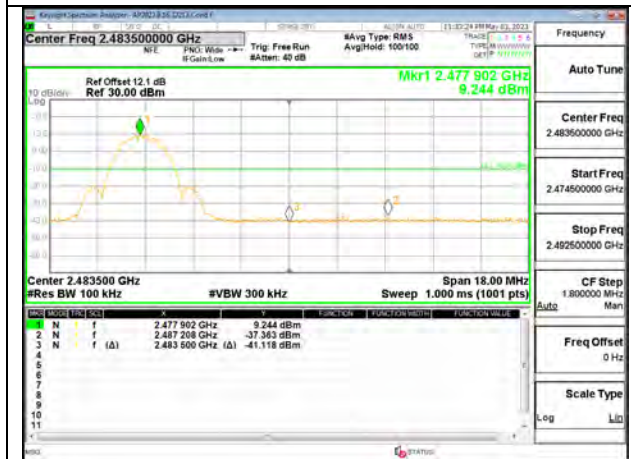

HIGH CHANNEL BANDEDGE



OUT-OF-BAND HIGH CHANNEL


ANT 3




LOW CHANNEL BANDEDGE




OUT-OF-BAND LOW CHANNEL

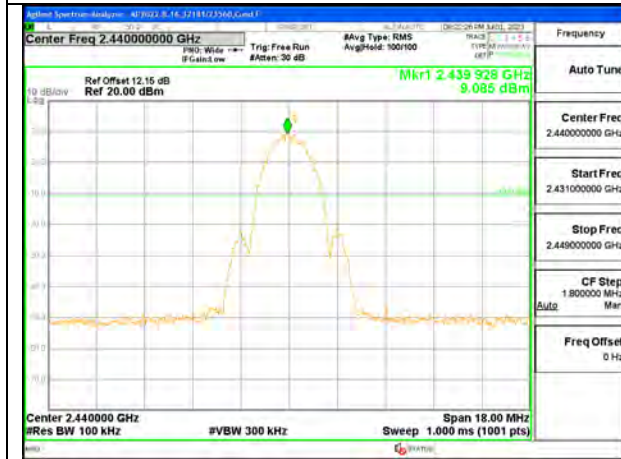

IN-BAND REFERENCE LEVEL

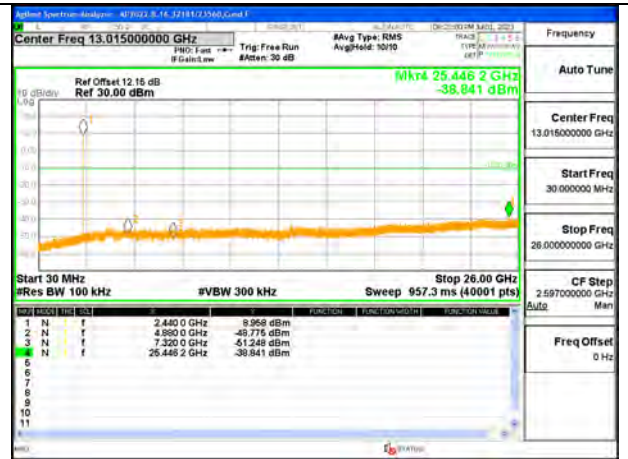

OUT-OF-BAND MID CHANNEL

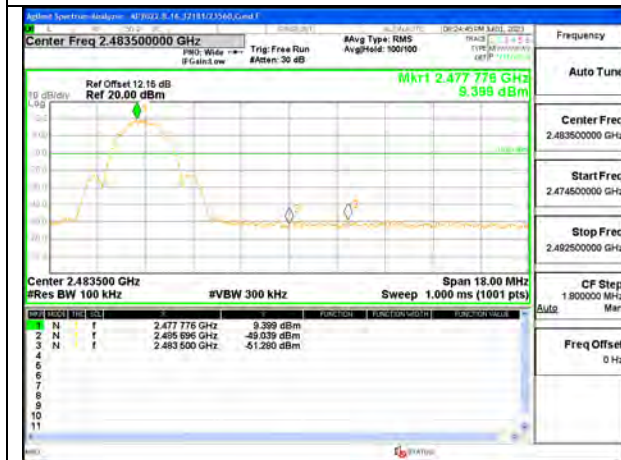







HIGH CHANNEL BANDEDGE









OUT-OF-BAND HIGH CHANNEL

9.7.8. LOW POWER BLE TXBF (2Mbps)

Note: Test procedures and setting are same as BLE normal mode.

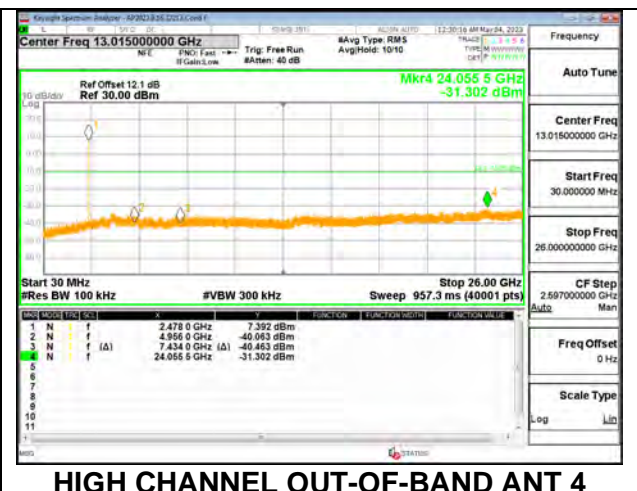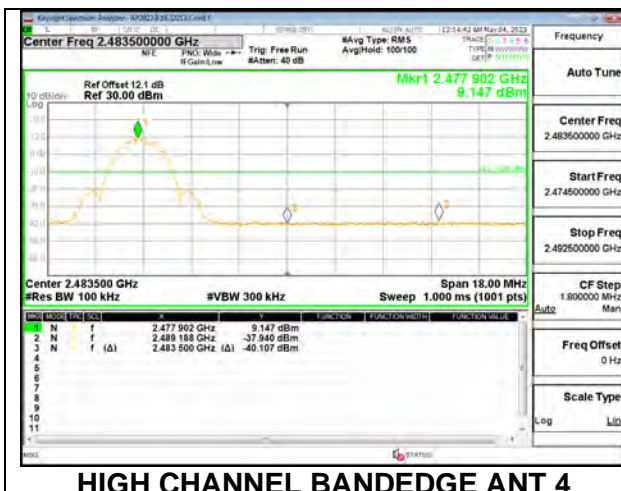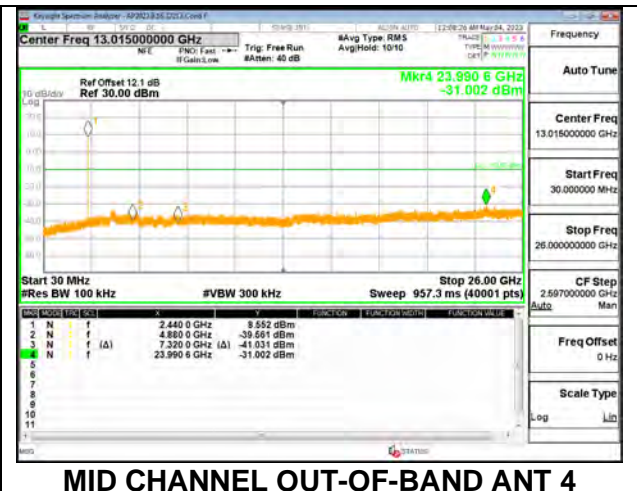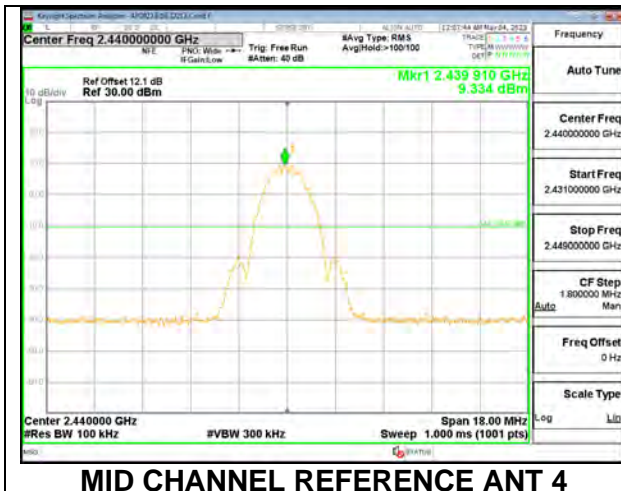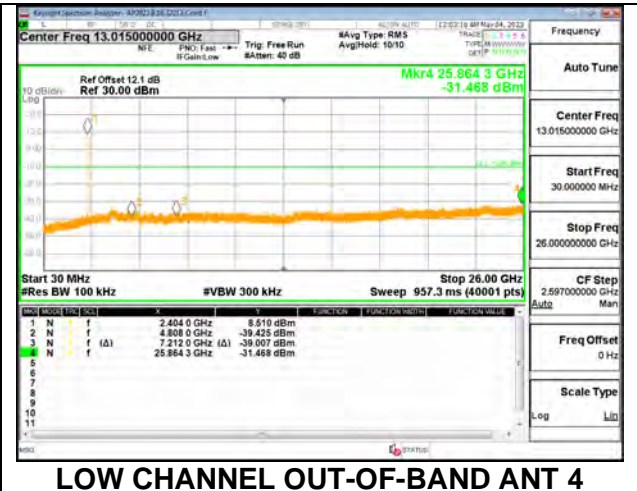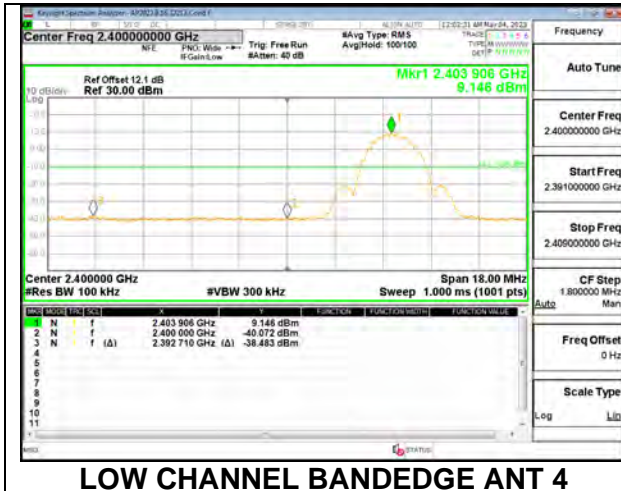

ANT 3

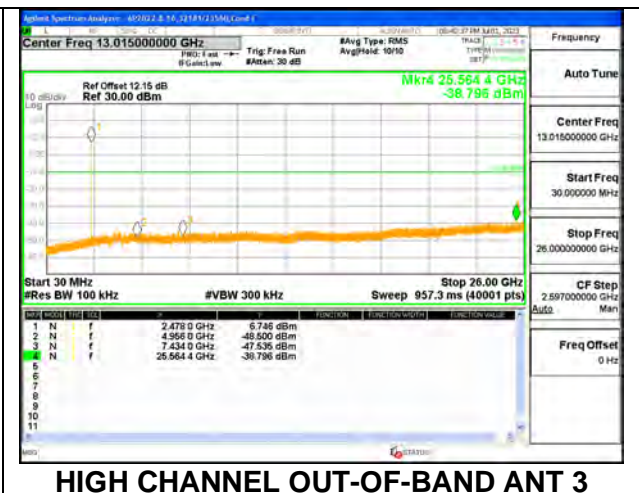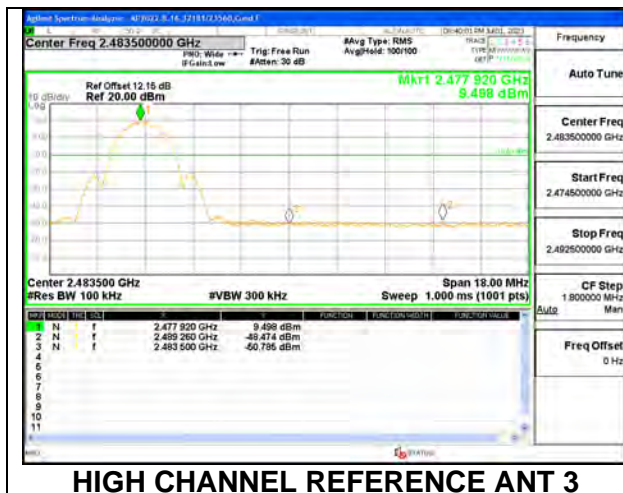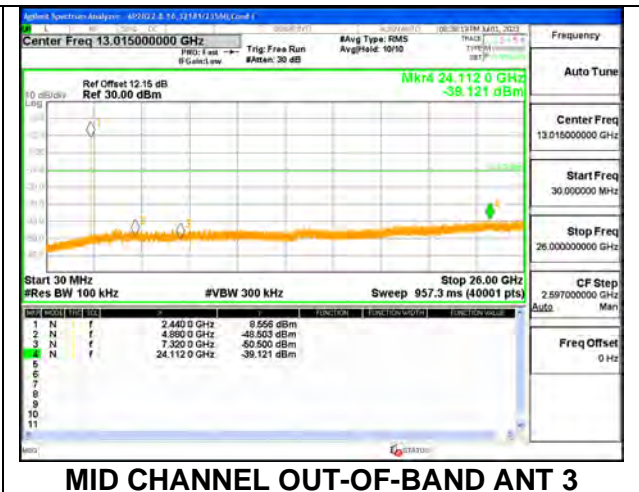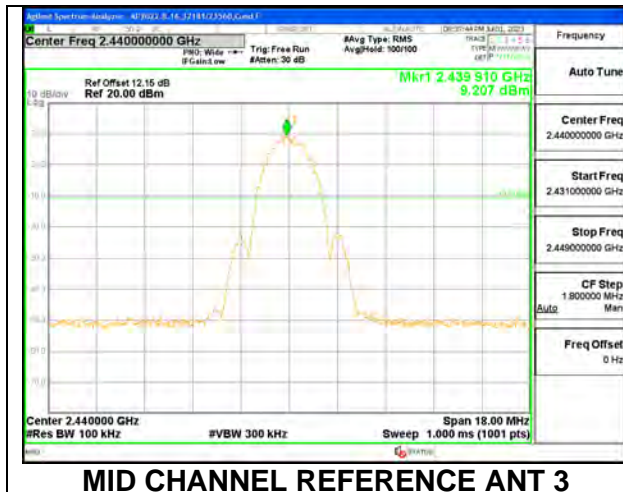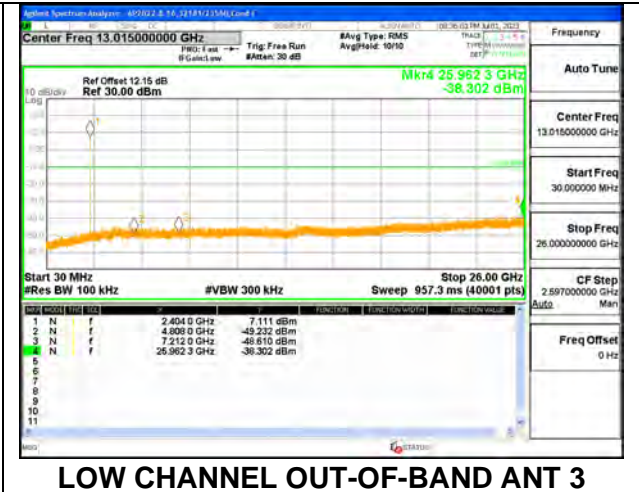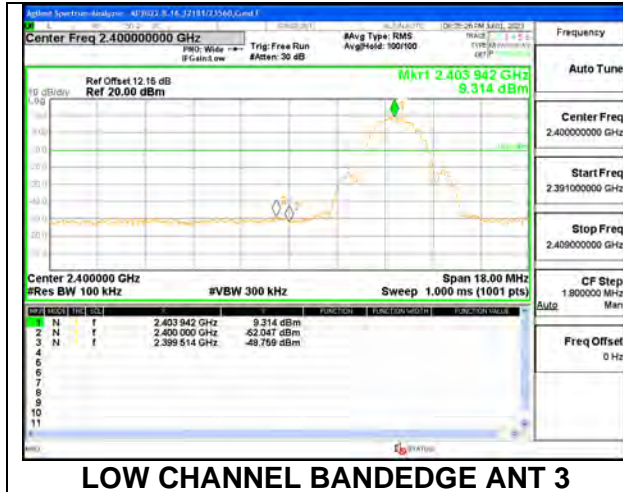

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as report in the table) using free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

In addition:

KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

RESULTS


10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. HIGH POWER BLE (1Mbps)

ANT 4

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

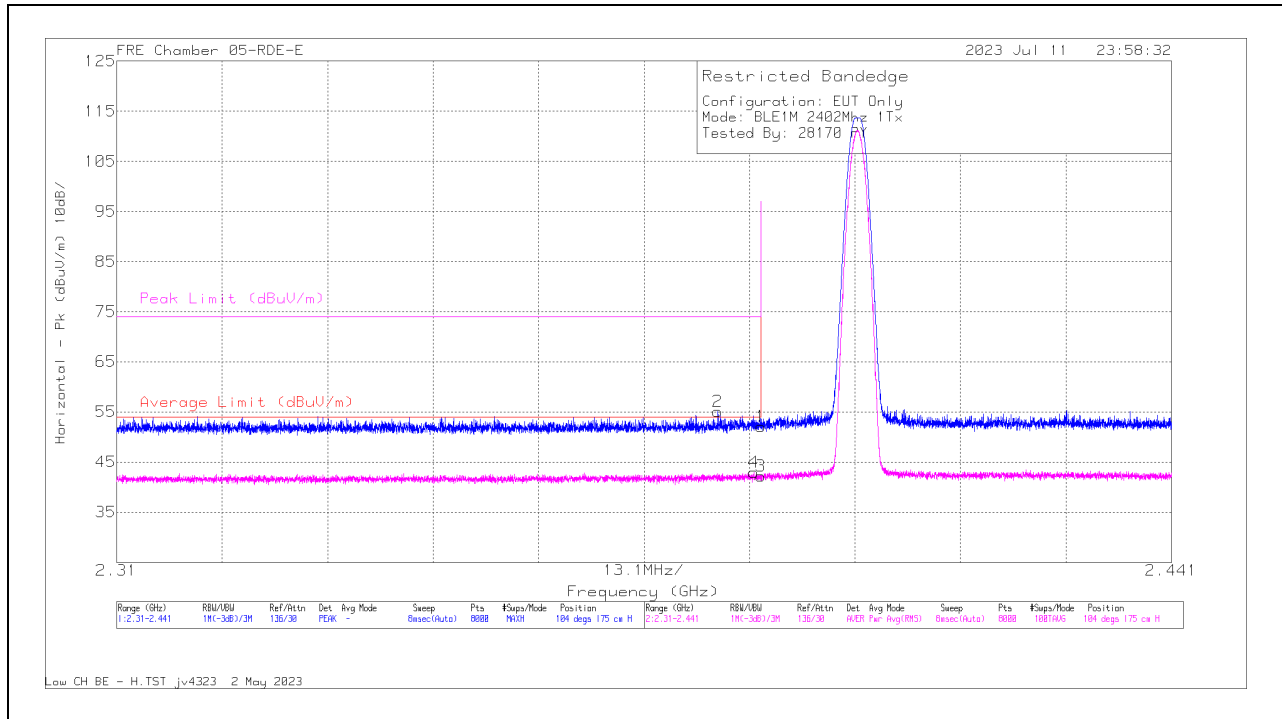

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	60.62	Pk	32	-40.5	52.12	-	-	74	-21.88	104	175	H
2	2.384663	63.71	Pk	31.9	-40.53	55.08	-	-	74	-18.92	104	175	H
3	2.39	50.76	RMS	32	-40.5	42.26	54	-11.74	-	-	104	175	H
4	2.389117	51.54	RMS	31.9	-40.49	42.95	54	-11.05	-	-	104	175	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

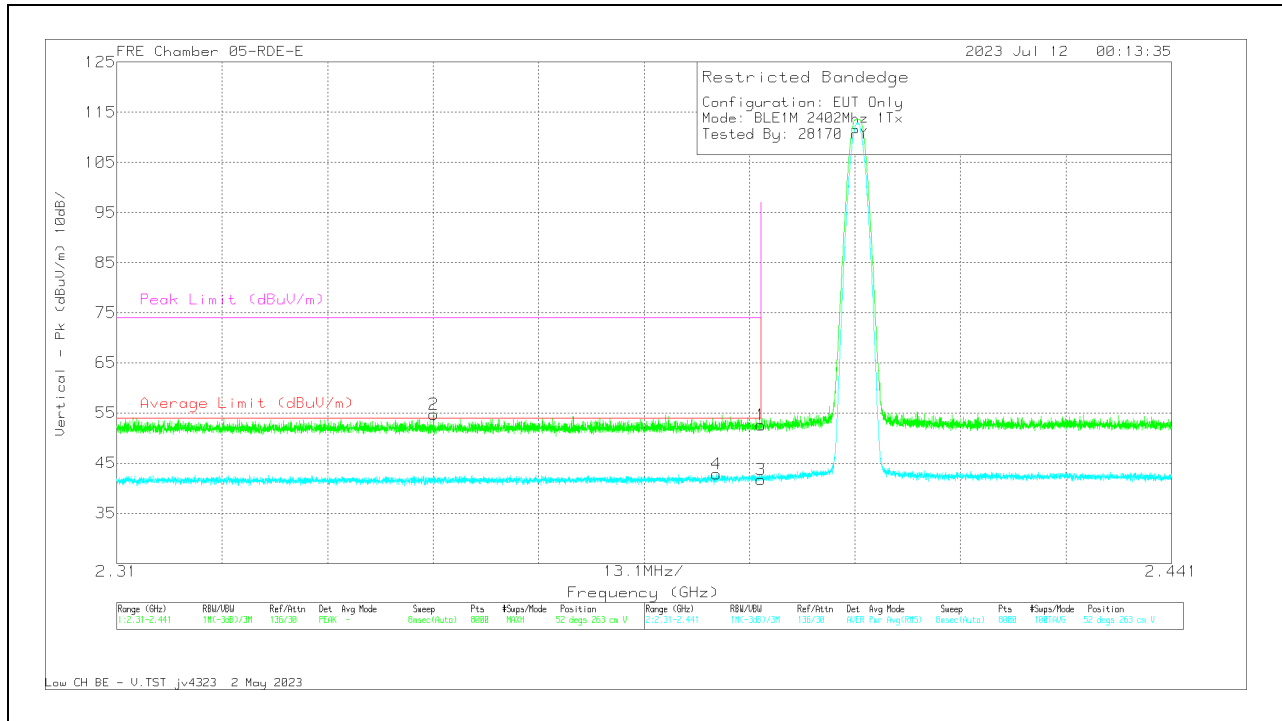


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	61.08	Pk	32	-40.5	52.58	-	-	74	-21.42	52	263	V
2	2.349354	63.5	Pk	31.8	-40.59	54.71	-	-	74	-19.29	52	263	V
3	2.39	50.19	RMS	32	-40.5	41.69	54	-12.31	-	-	52	263	V
4	2.38445	51.52	RMS	31.9	-40.53	42.89	54	-11.11	-	-	52	263	V

Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

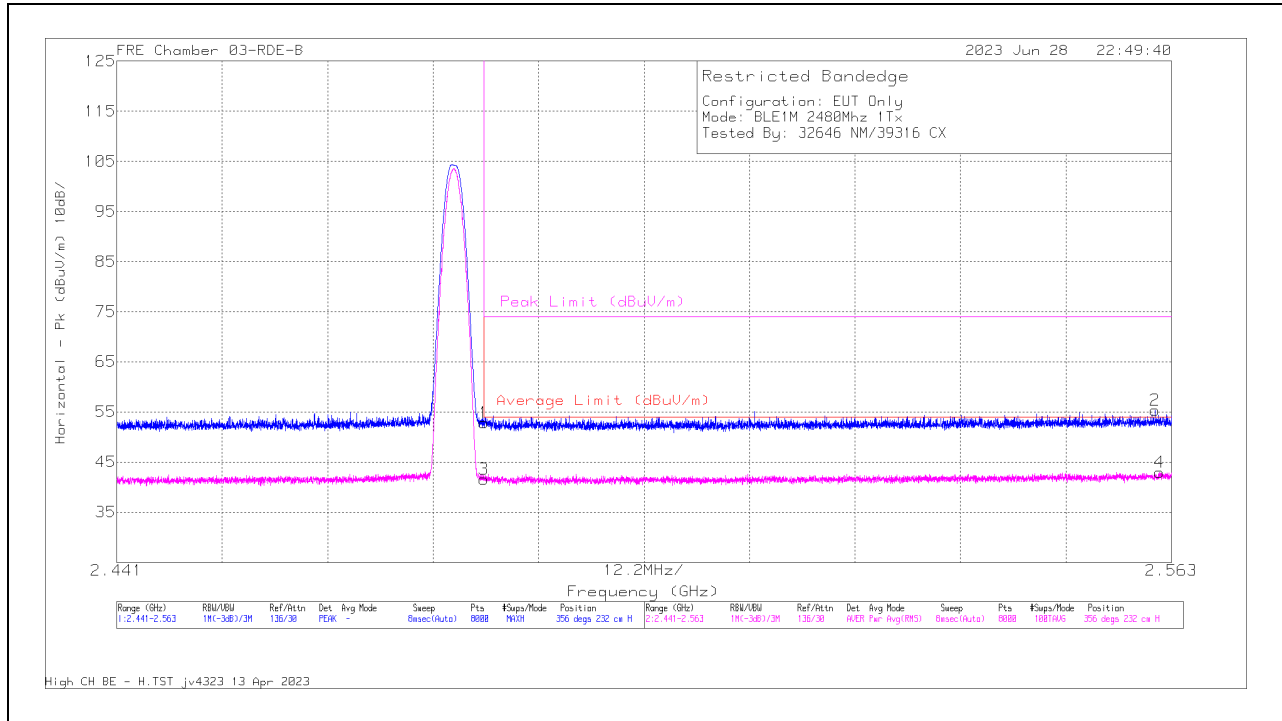


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.8	Pk	32.2	0	-41.15	52.85	-	-	74	-21.15	356	232	H
2	2.561094	63.93	Pk	32.3	0	-40.89	55.34	-	-	74	-18.66	356	232	H
3	* 2.4835	50.56	RMS	32.2	0	-41.15	41.61	54	-12.39	-	-	356	232	H
4	2.561613	51.53	RMS	32.3	0	-40.84	42.99	54	-11.01	-	-	356	232	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

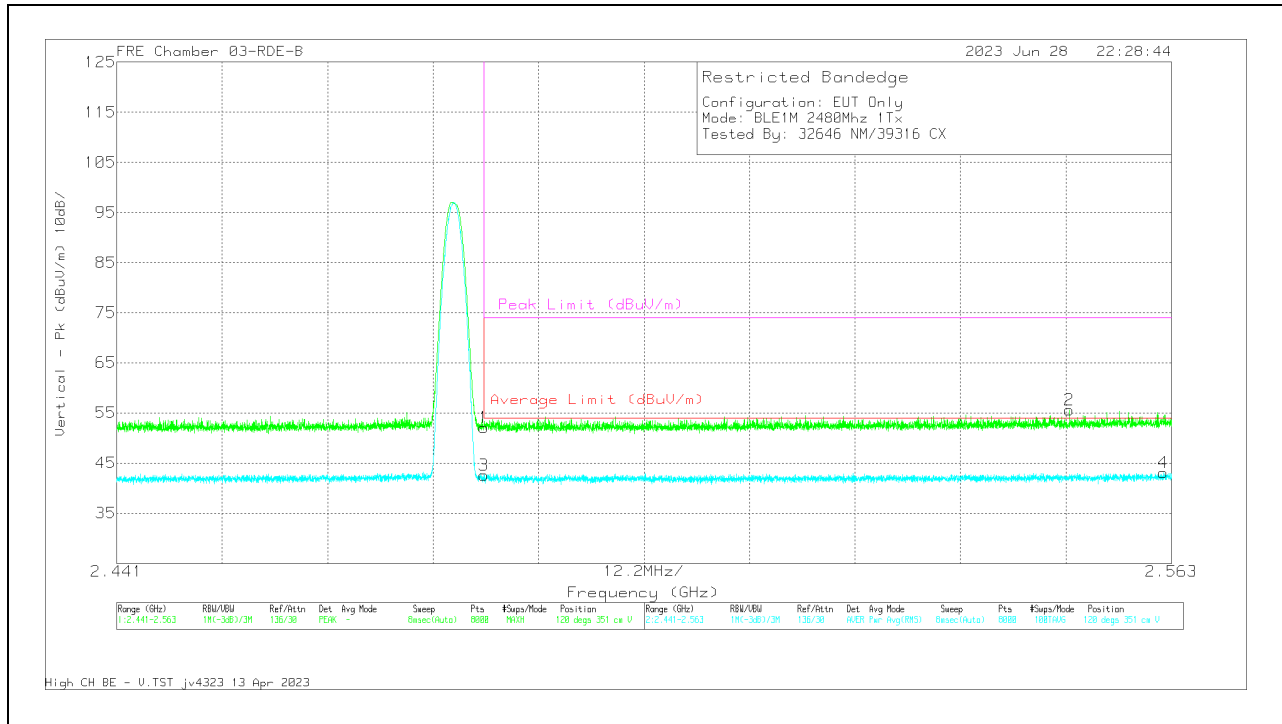

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

ANT 3

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

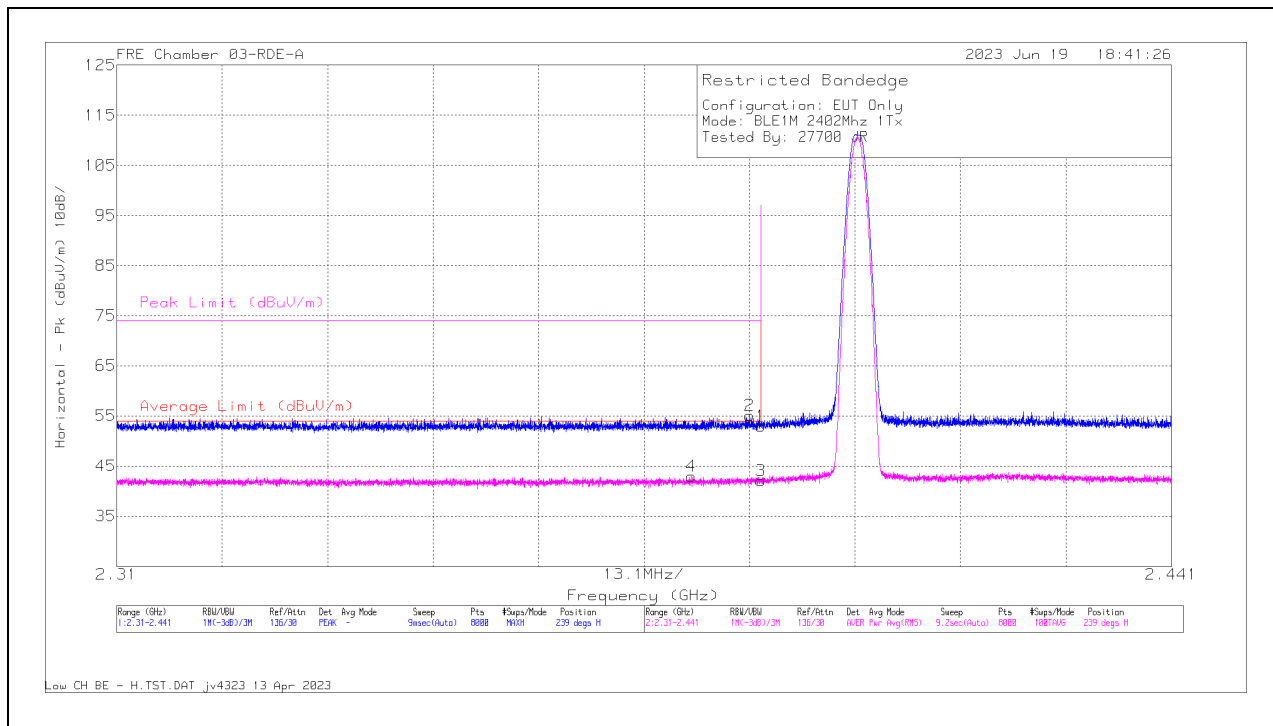


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	61.16	Pk	32.2	0	-40.42	52.94	-	-	74	-21.06	239	227	H
2	* 2.388577	63.47	Pk	32.1	0	-40.43	55.14	-	-	74	-18.86	239	227	H
3	* 2.39	50.27	RMS	32.2	0	-40.42	42.05	54	-11.95	-	-	239	227	H
4	* 2.381387	51.29	RMS	32.1	0	-40.42	42.97	54	-11.03	-	-	239	227	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

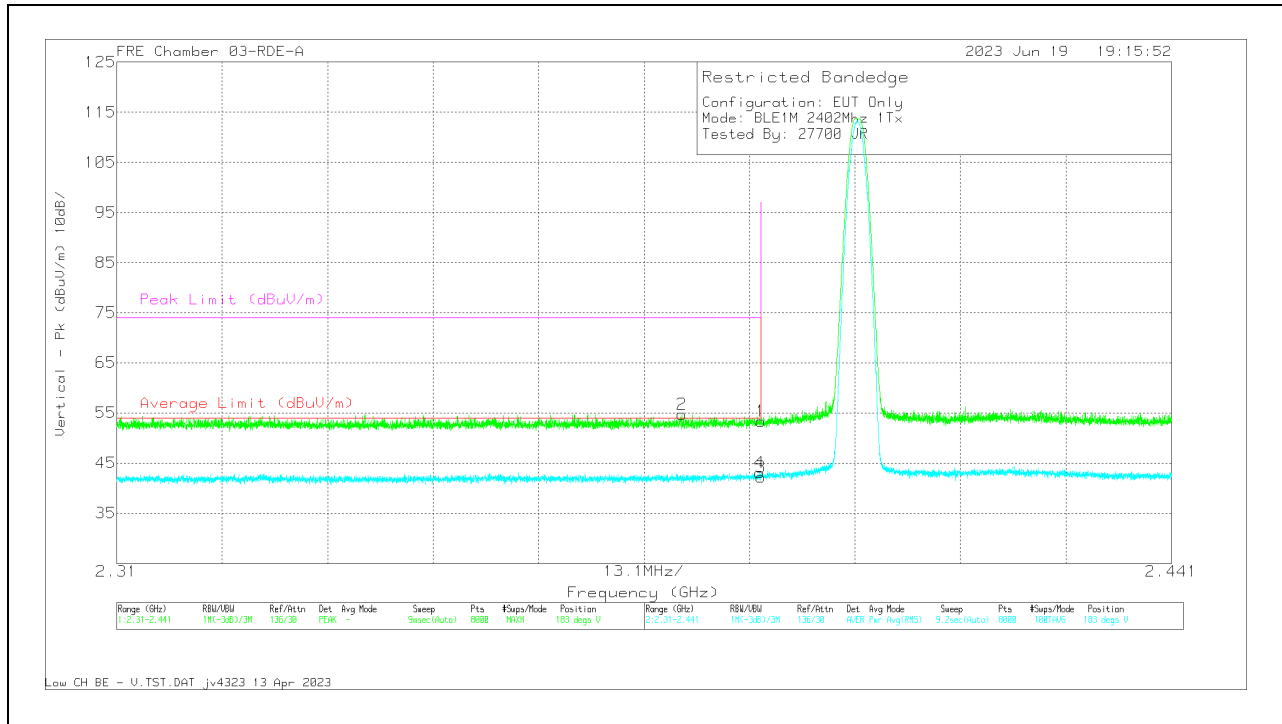

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	61.57	Pk	32.2	0	-40.42	53.35	-	-	74	-20.65	183	129	V
2	* 2.380175	63.07	Pk	32.1	0	-40.43	54.74	-	-	74	-19.26	183	129	V
3	* 2.39	50.47	RMS	32.2	0	-40.42	42.25	54	-11.75	-	-	183	129	V
4	* 2.389887	51.35	RMS	32.2	0	-40.42	43.13	54	-10.87	-	-	183	129	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

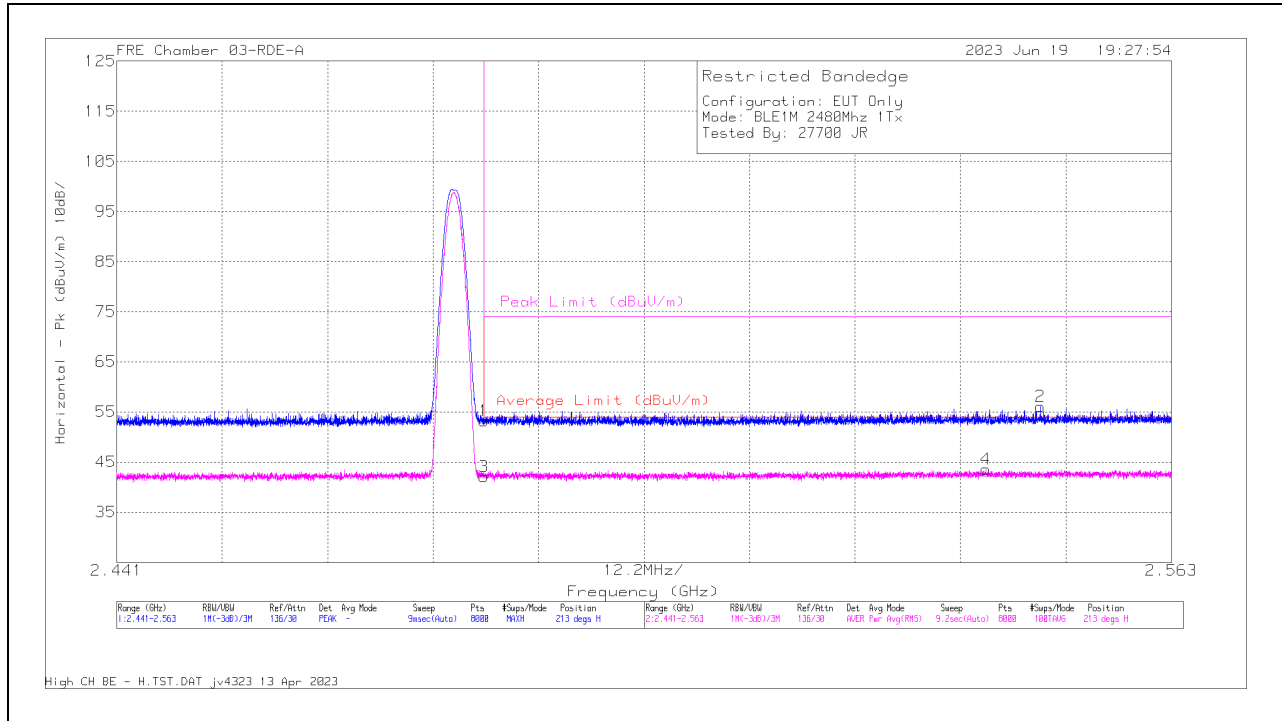


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.06	Pk	32.3	0	-40.11	53.25	-	-	74	-20.75	213	330	H
2	2.54784	63.6	Pk	32.5	0	-39.97	56.13	-	-	74	-17.87	213	330	H
3	* 2.4835	49.85	RMS	32.3	0	-40.11	42.04	54	-11.96	-	-	213	330	H
4	2.541556	51.02	RMS	32.5	0	-39.95	43.57	54	-10.43	-	-	213	330	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

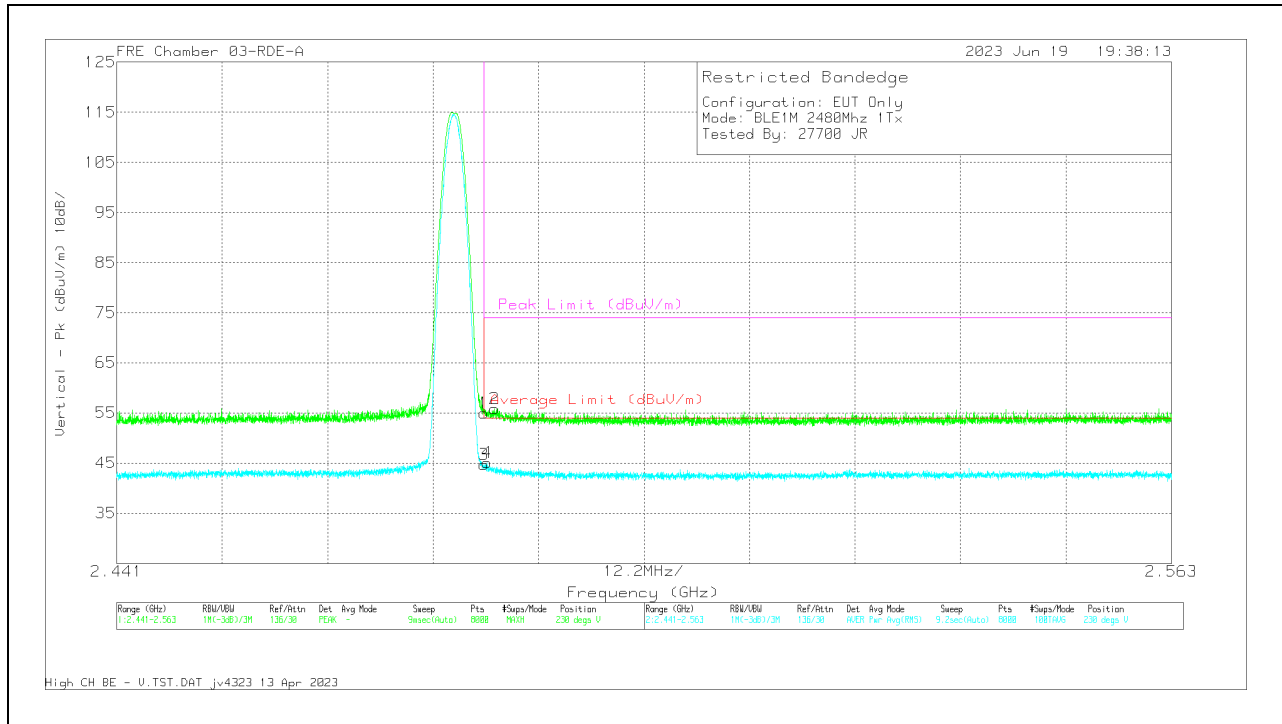


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	62.78	Pk	32.3	0	-40.11	54.97	-	-	74	-19.03	230	132	V
2	* 2.484682	63.71	Pk	32.3	0	-40.11	55.9	-	-	74	-18.1	230	132	V
3	* 2.4835	52.5	RMS	32.3	0	-40.11	44.69	54	-9.31	-	-	230	132	V
4	* 2.483828	52.88	RMS	32.3	0	-40.11	45.07	54	-8.93	-	-	230	132	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.2.2. HIGH POWER BLE TXBF (1Mbps)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

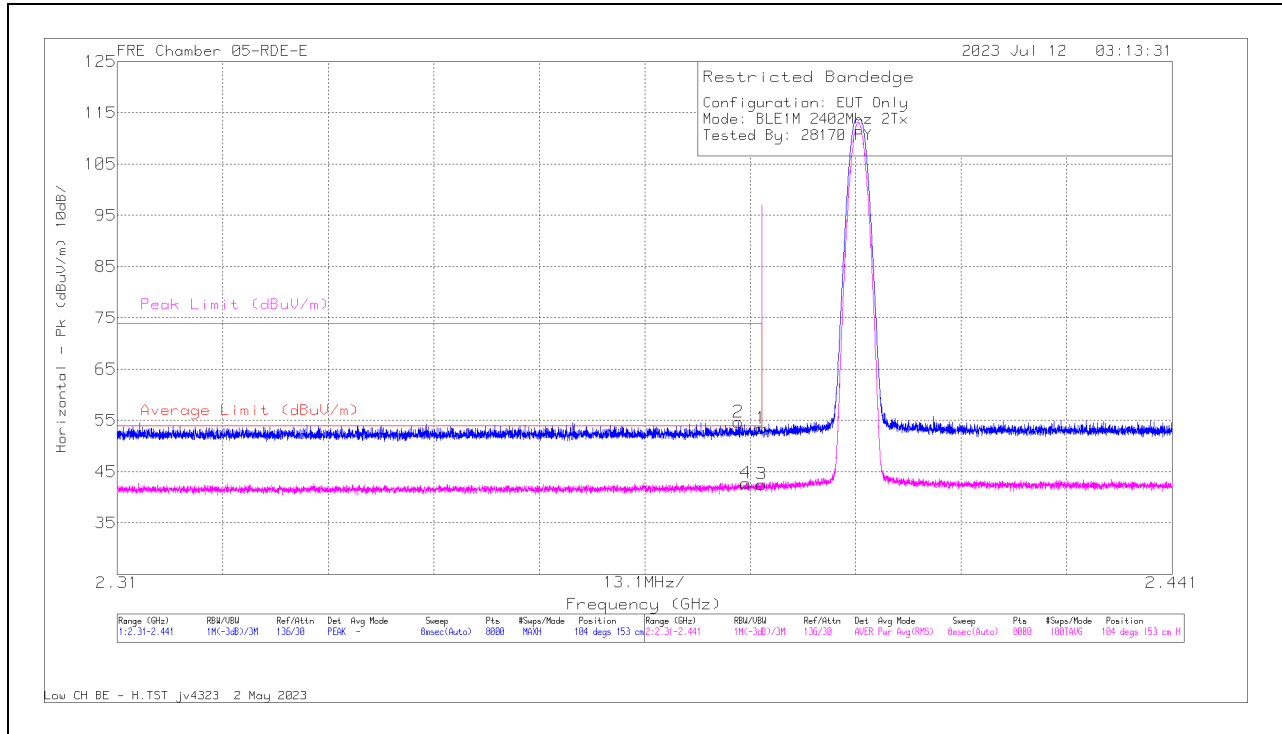

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	61.96	Pk	32	-40.5	53.46	-	-	74	-20.54	104	153	H
2	2.387119	63.28	Pk	31.9	-40.49	54.69	-	-	74	-19.31	104	153	H
3	2.39	51.08	RMS	32	-40.5	42.58	54	-11.42	-	-	104	153	H
4	2.388053	51.38	RMS	31.9	-40.48	42.8	54	-11.2	-	-	104	153	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

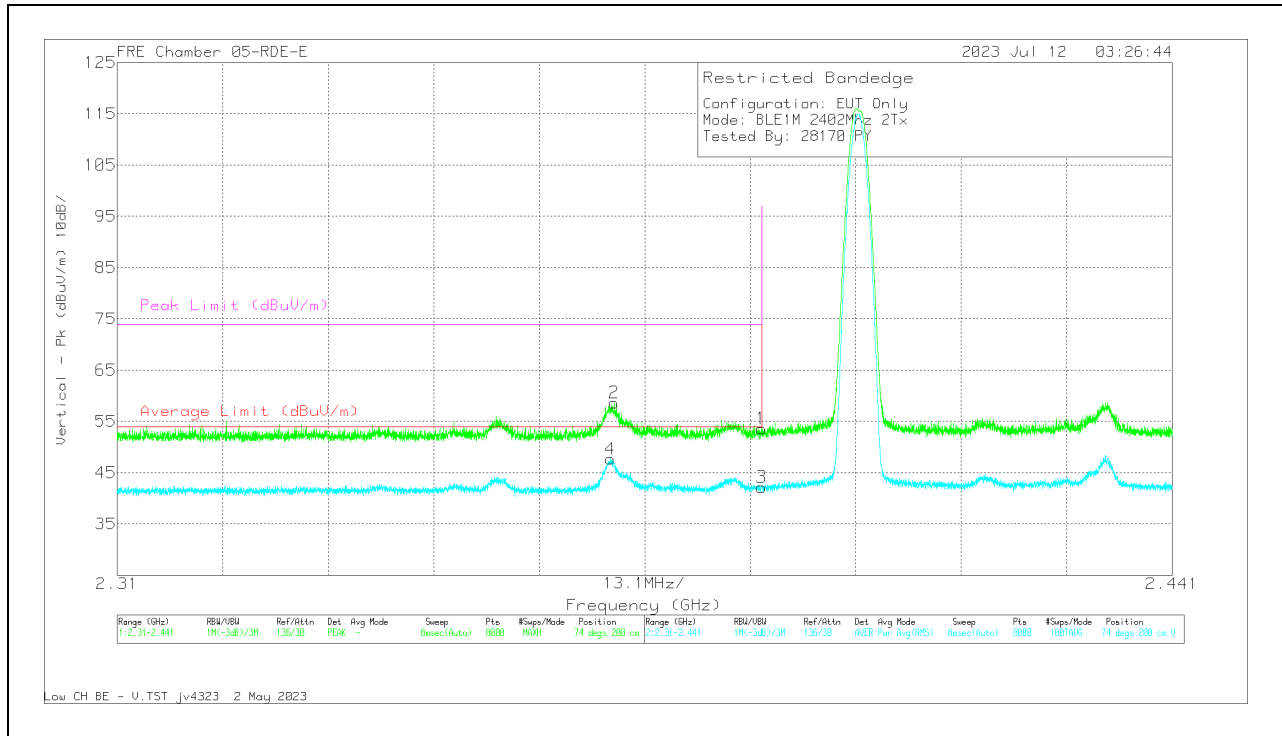


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	62.09	Pk	32	-40.5	53.59	-	-	74	-20.41	74	200	V
2	2.371709	67.28	Pk	31.9	-40.55	58.63	-	-	74	-15.37	74	200	V
3	2.39	50.67	RMS	32	-40.5	42.17	54	-11.83	-	-	74	200	V
4	2.371234	56.3	RMS	31.9	-40.55	47.65	54	-6.35	-	-	74	200	V

Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

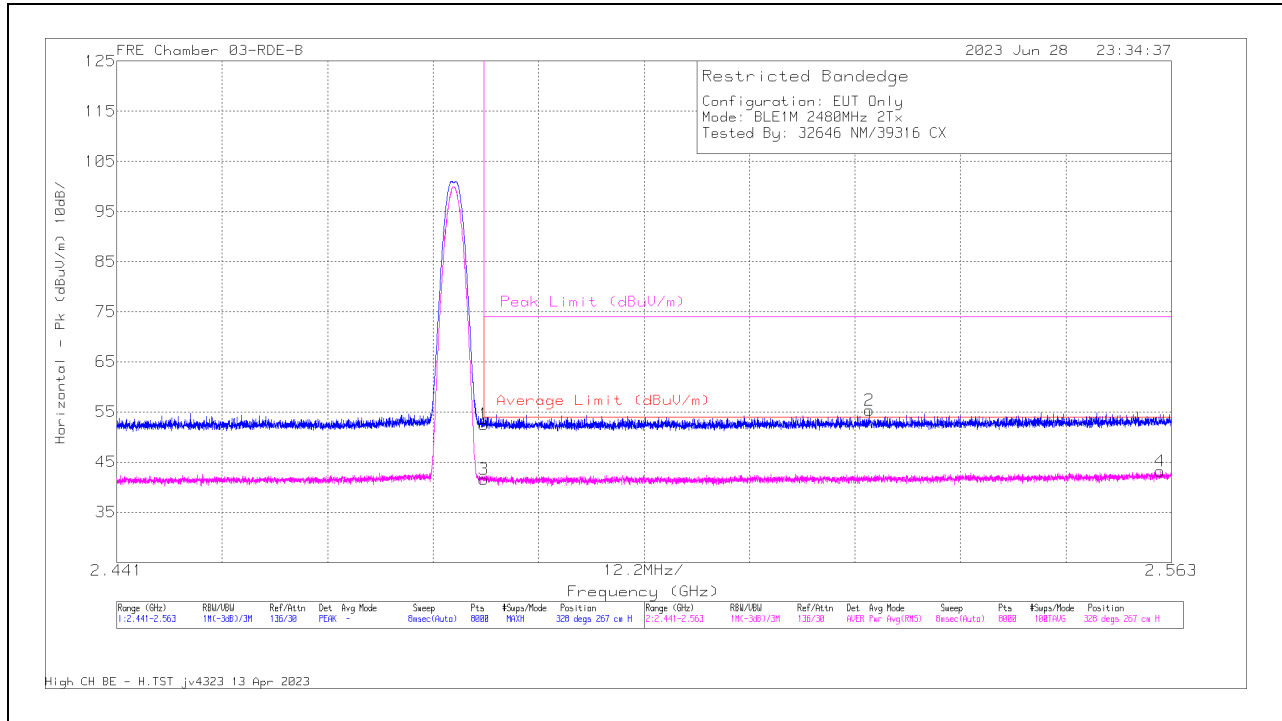


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.48	Pk	32.2	0	-41.15	52.53	-	-	74	-21.47	328	267	H
2	2.528058	64.07	Pk	32.3	0	-41	55.37	-	-	74	-18.63	328	267	H
3	* 2.4835	50.55	RMS	32.2	0	-41.15	41.6	54	-12.4	-	-	328	267	H
4	2.561674	51.76	RMS	32.3	0	-40.83	43.23	54	-10.77	-	-	328	267	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

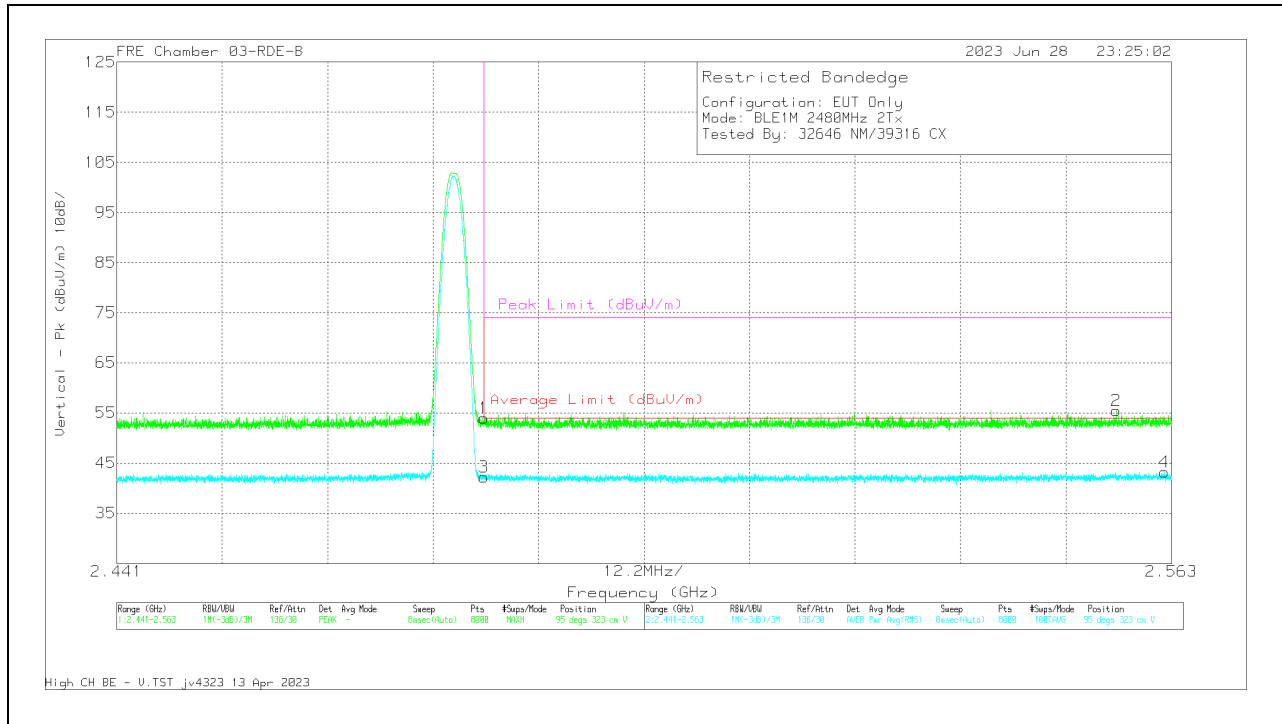

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	62.98	Pk	32.2	0	-41.15	54.03	-	-	74	-19.97	95	323	V
2	2.556595	64.05	Pk	32.3	0	-40.9	55.45	-	-	74	-18.55	95	323	V
3	* 2.4835	51.14	RMS	32.2	0	-41.15	42.19	54	-11.81	-	-	95	323	V
4	2.562192	51.7	RMS	32.3	0	-40.8	43.2	54	-10.8	-	-	95	323	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.2.3. HIGH POWER BLE (2Mbps)

ANT 4

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

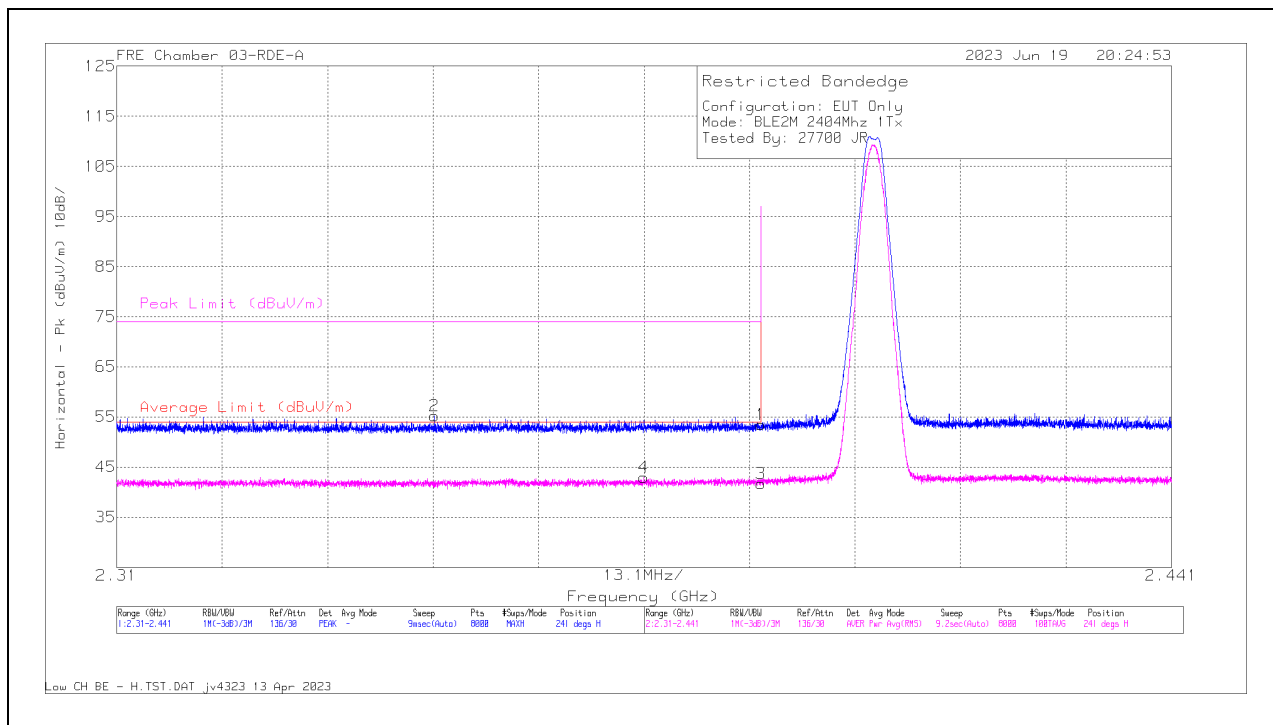


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	61.69	Pk	32.2	0	-40.42	53.47	-	-	74	-20.53	241	115	H
2	* 2.349469	63.59	Pk	32.1	0	-40.46	55.23	-	-	74	-18.77	241	115	H
3	* 2.39	49.98	RMS	32.2	0	-40.42	41.76	54	-12.24	-	-	241	115	H
4	* 2.375442	51.27	RMS	32.1	0	-40.41	42.96	54	-11.04	-	-	241	115	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

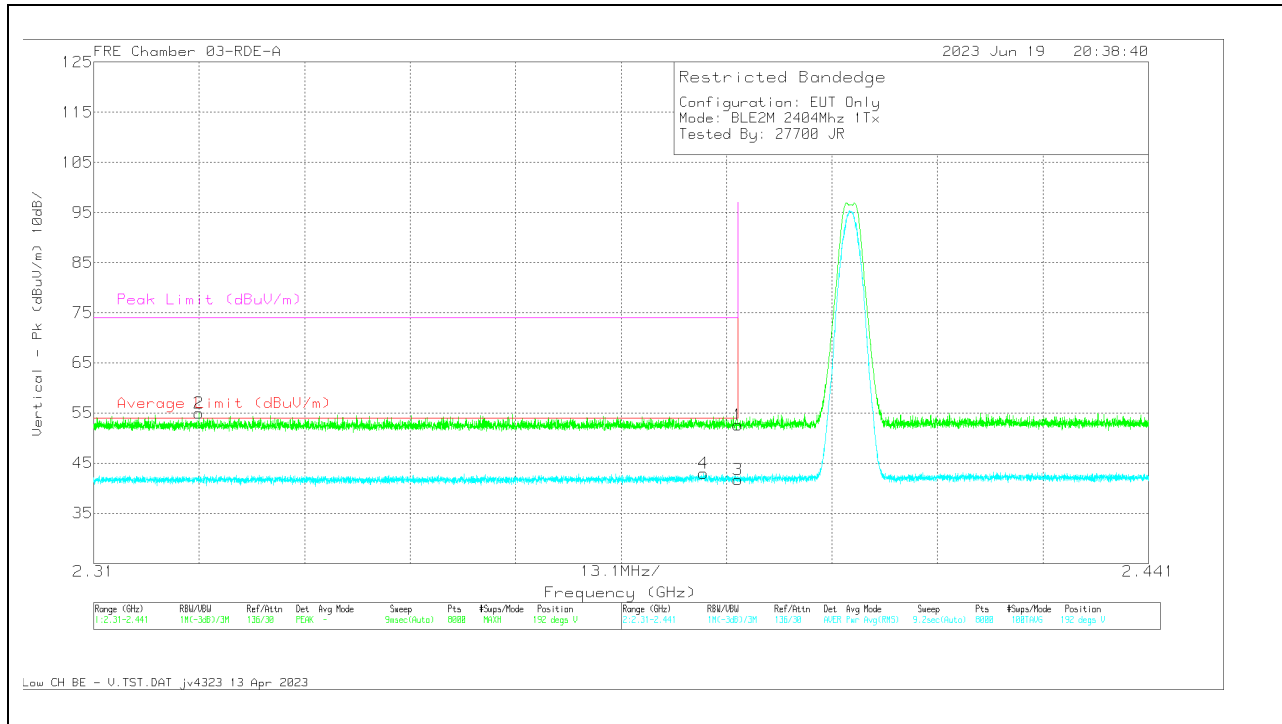


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.81	Pk	32.2	0	-40.42	52.59	-	-	74	-21.41	192	280	V
2	* 2.323069	63.37	Pk	32.1	0	-40.48	54.99	-	-	74	-19.01	192	280	V
3	* 2.39	49.93	RMS	32.2	0	-40.42	41.71	54	-12.29	-	-	192	280	V
4	* 2.385727	51.24	RMS	32.1	0	-40.39	42.95	54	-11.05	-	-	192	280	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

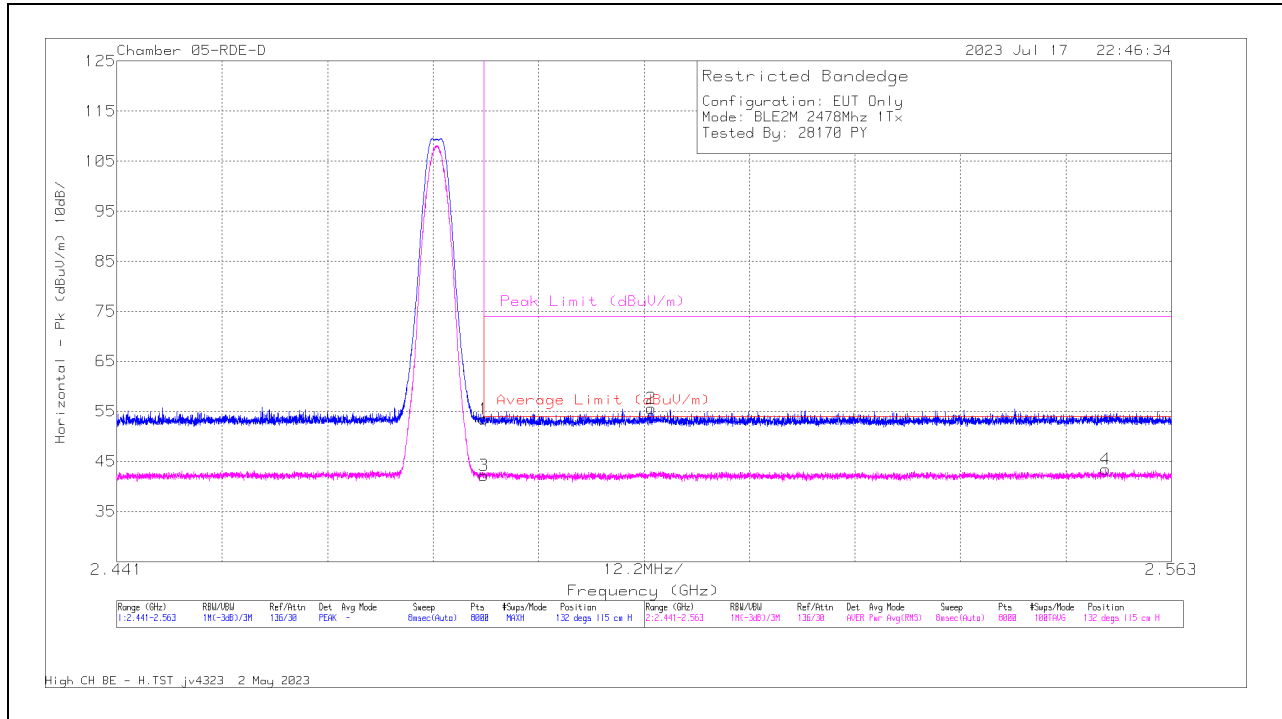

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	61.5	Pk	32.3	-40.38	53.42	-	-	74	-20.58	132	115	H
3	2.4835	50.33	RMS	32.3	-40.38	42.25	54	-11.75	-	-	132	115	H
2	2.502816	63.49	Pk	32.4	-40.3	55.59	-	-	74	-18.41	132	115	H
4	2.555375	51.06	RMS	32.5	-40.09	43.47	54	-10.53	-	-	132	115	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

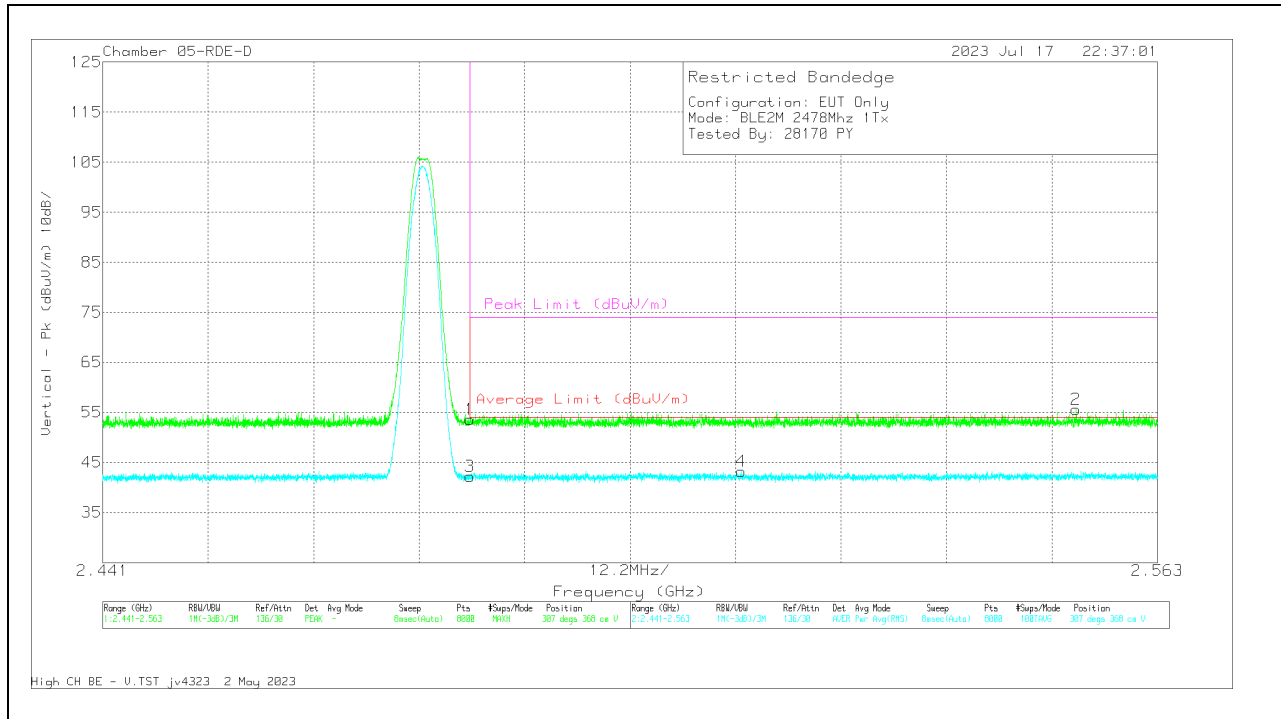


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	61.63	Pk	32.3	-40.38	53.55	-	-	74	-20.45	307	368	V
3	2.4835	50.3	RMS	32.3	-40.38	42.22	54	-11.78	-	-	307	368	V
4	2.514865	51.13	RMS	32.4	-40.27	43.26	54	-10.74	-	-	307	368	V
2	2.55359	63.21	Pk	32.5	-40.11	55.6	-	-	74	-18.4	307	368	V

Pk - Peak detector
RMS - RMS detection

ANT 3

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

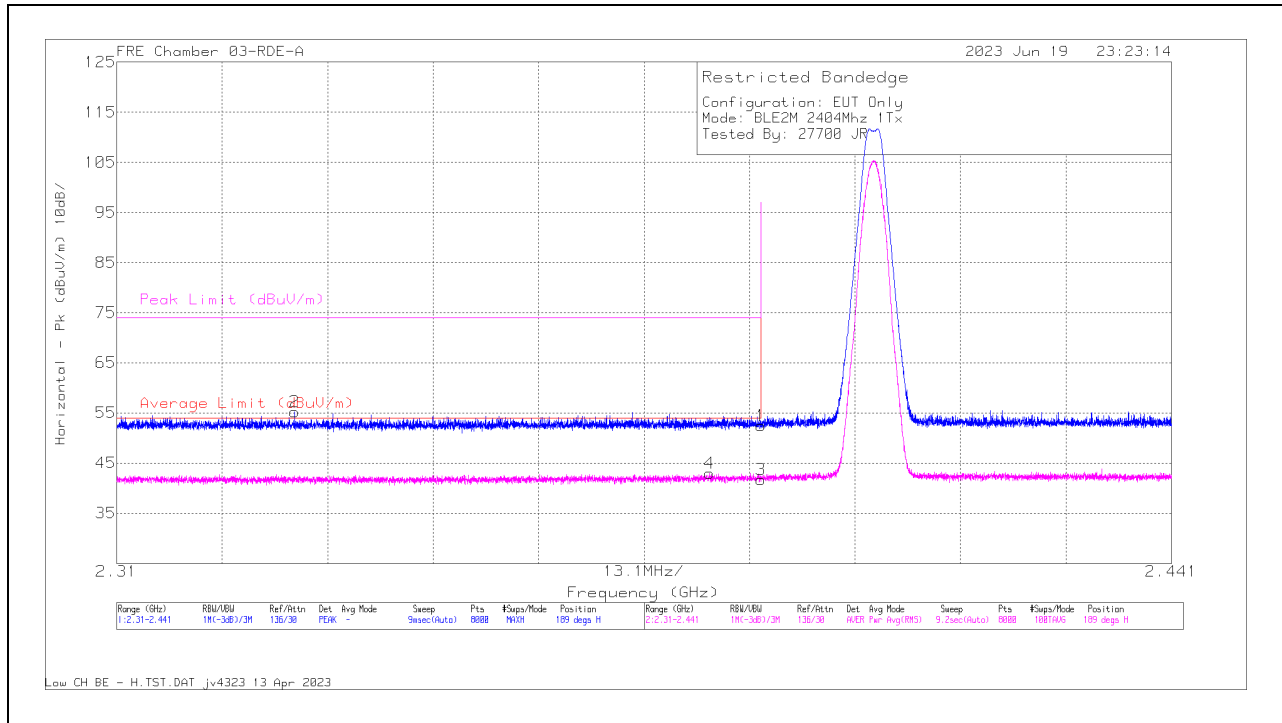

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.72	Pk	32.2	0	-40.42	52.5	-	-	74	-21.5	189	309	H
2	* 2.332125	63.54	Pk	32.1	0	-40.45	55.19	-	-	74	-18.81	189	309	H
3	* 2.39	49.95	RMS	32.2	0	-40.42	41.73	54	-12.27	-	-	189	309	H
4	* 2.383598	51.3	RMS	32.1	0	-40.39	43.01	54	-10.99	-	-	189	309	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

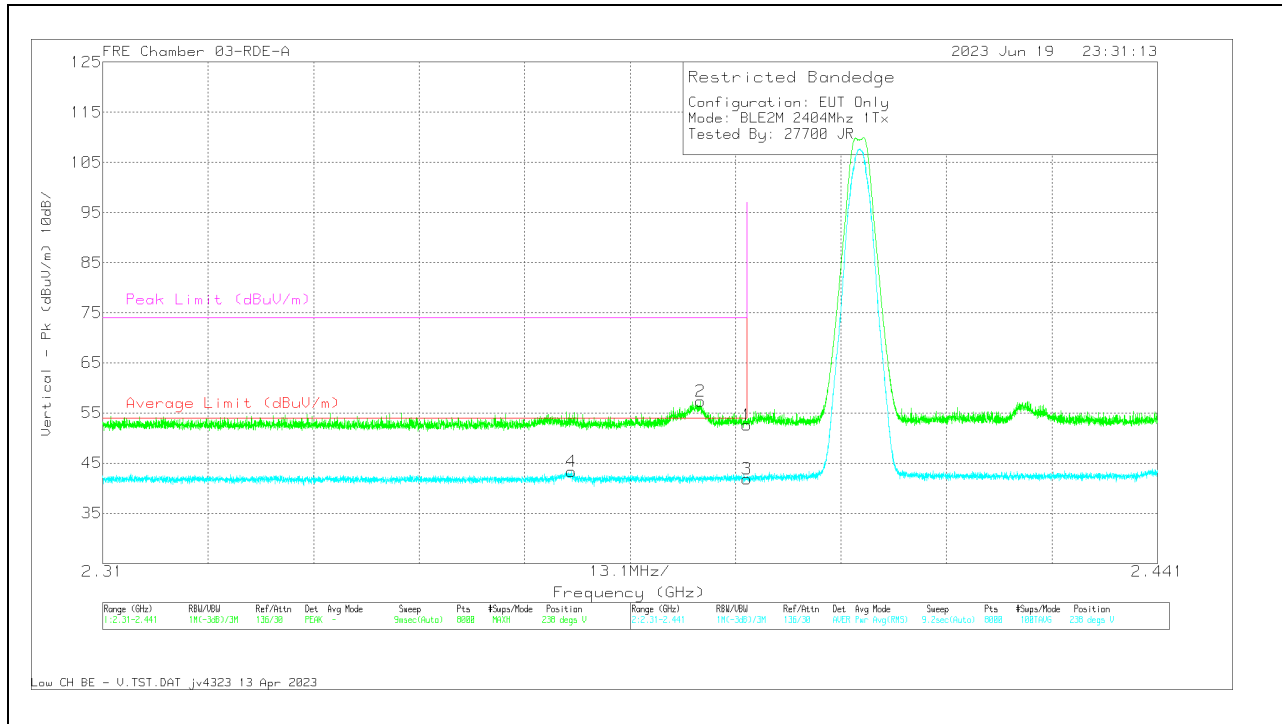


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.84	Pk	32.2	0	-40.42	52.62	-	-	74	-21.38	238	344	V
2	* 2.38427	65.59	Pk	32.1	0	-40.38	57.31	-	-	74	-16.69	238	344	V
3	* 2.39	50.06	RMS	32.2	0	-40.42	41.84	54	-12.16	-	-	238	344	V
4	* 2.368253	51.6	RMS	32.1	0	-40.41	43.29	54	-10.71	-	-	238	344	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

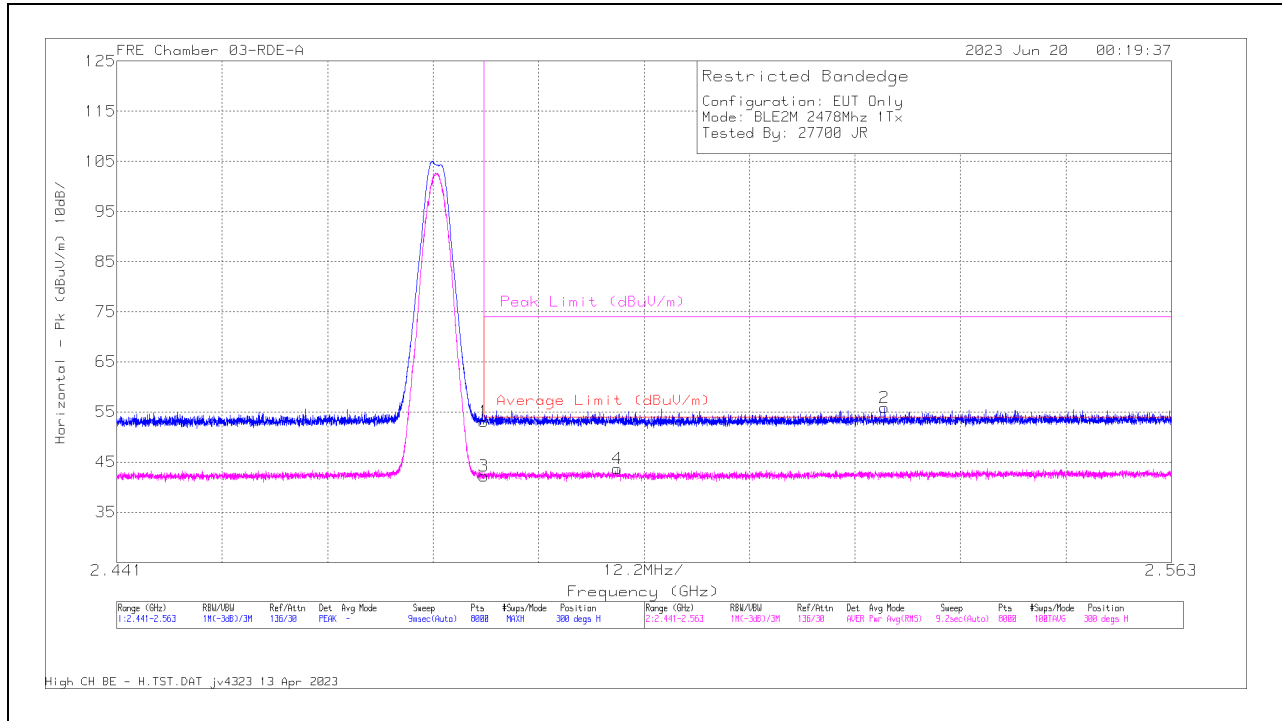


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	60.92	Pk	32.3	0	-40.11	53.11	-	-	74	-20.89	300	171	H
2	2.529767	63.35	Pk	32.5	0	-40.03	55.82	-	-	74	-18.18	300	171	H
3	* 2.4835	50	RMS	32.3	0	-40.11	42.19	54	-11.81	-	-	300	171	H
4	* 2.498897	51.34	RMS	32.4	0	-40.03	43.71	54	-10.29	-	-	300	171	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

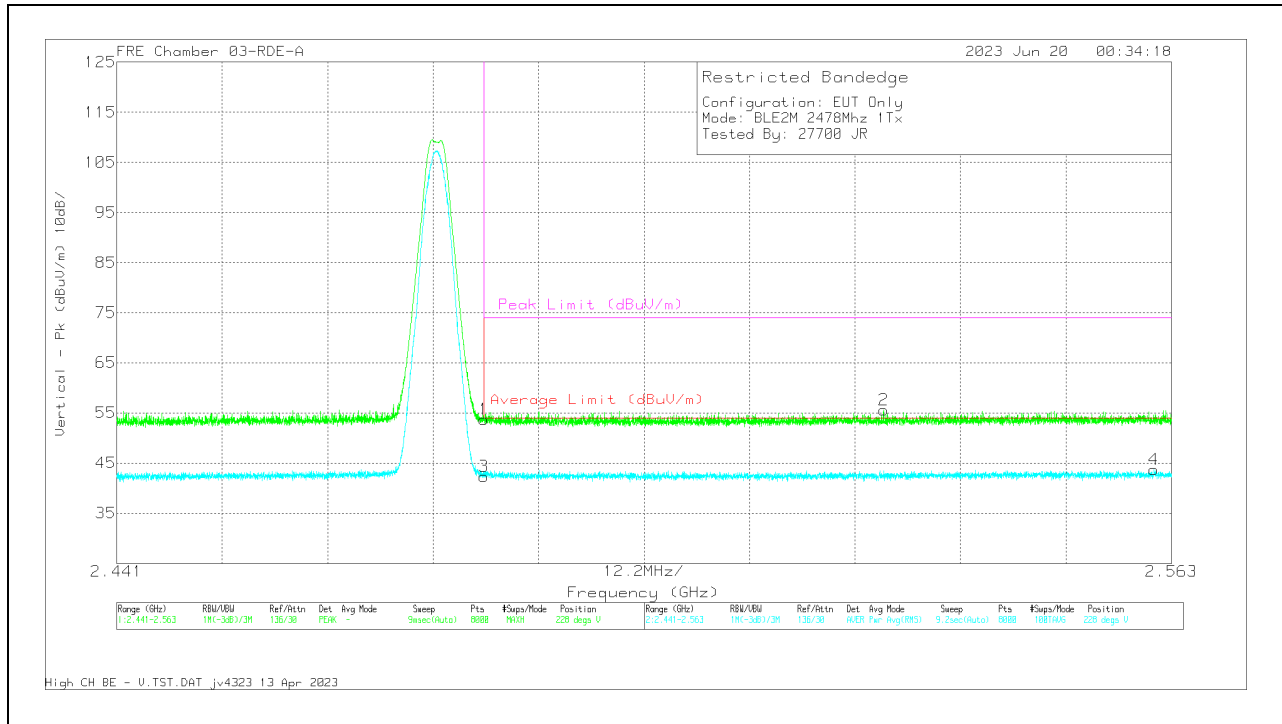

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.55	Pk	32.3	0	-40.11	53.74	-	-	74	-20.26	228	133	V
2	2.52969	63.13	PK	32.5	0	-40.03	55.6	-	-	74	-18.4	228	133	V
3	* 2.4835	50.1	RMS	32.3	0	-40.11	42.29	54	-11.71	-	-	228	133	V
4	2.560987	51.09	RMS	32.5	0	-39.93	43.66	54	-10.34	-	-	228	133	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

10.2.4. HIGH POWER BLE TXBF (2Mbps)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

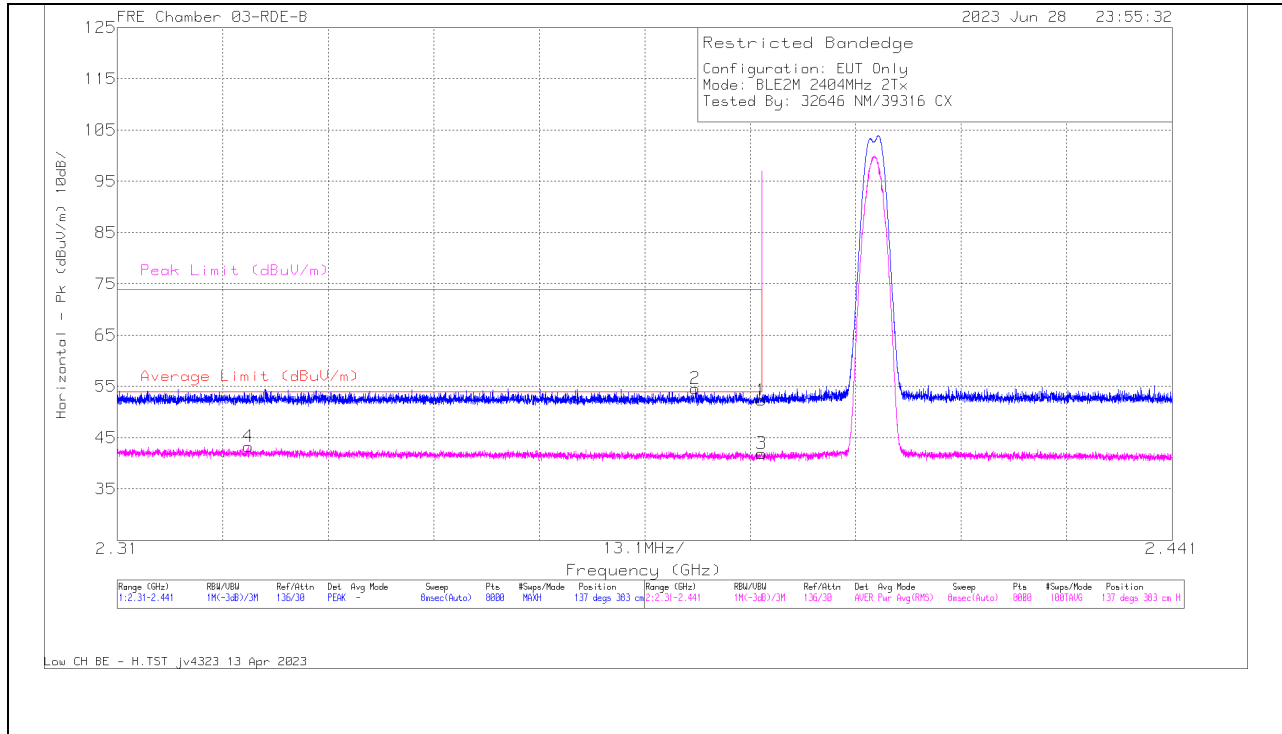

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	61.31	PK	32.2	0	-41.2	52.31	-	-	74	-21.69	137	383	H
2	* 2.381797	63.75	PK	32.1	0	-41.26	54.59	-	-	74	-19.41	137	383	H
3	* 2.39	50.94	RMS	32.2	0	-41.2	41.94	54	-12.06	-	-	137	383	H
4	* 2.326295	52.39	RMS	32.1	0	-41.2	43.29	54	-10.71	-	-	137	383	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

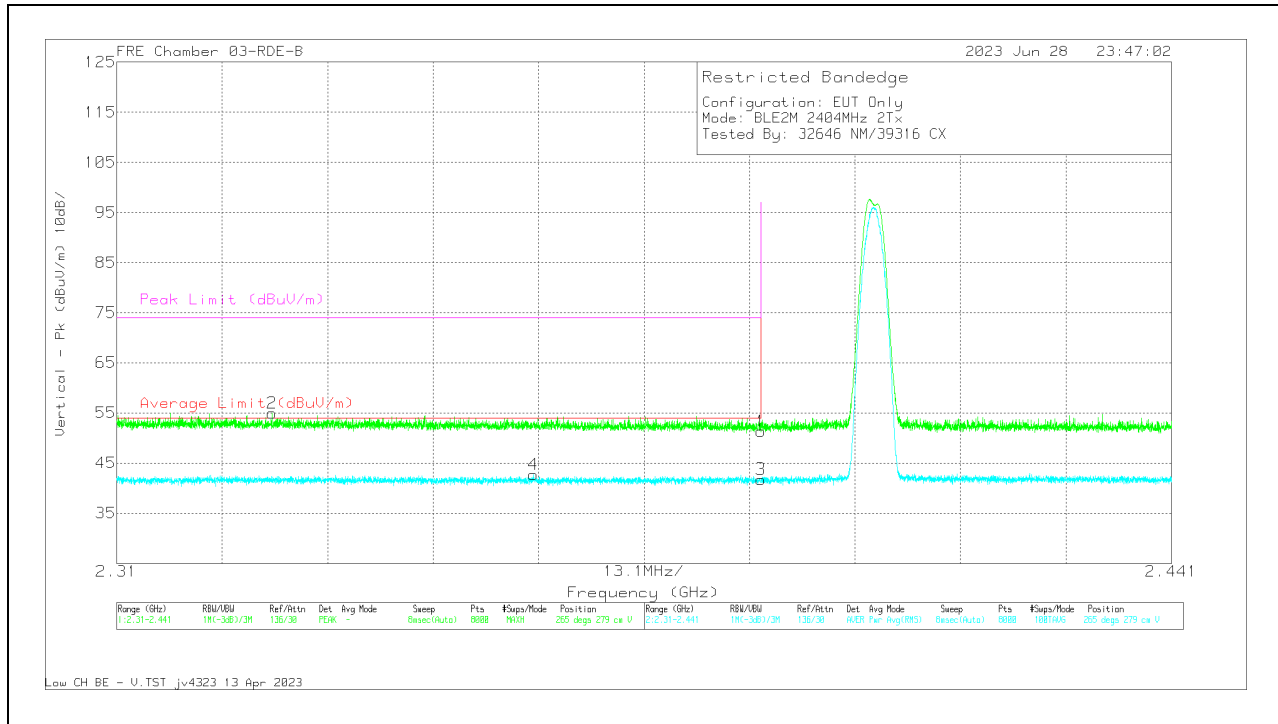


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.34	Pk	32.2	0	-41.2	51.34	-	-	74	-22.66	265	279	V
2	* 2.329259	64.07	Pk	32.1	0	-41.2	54.97	-	-	74	-19.03	265	279	V
3	* 2.39	50.77	RMS	32.2	0	-41.2	41.77	54	-12.23	-	-	265	279	V
4	* 2.361784	51.86	RMS	32.1	0	-41.2	42.76	54	-11.24	-	-	265	279	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

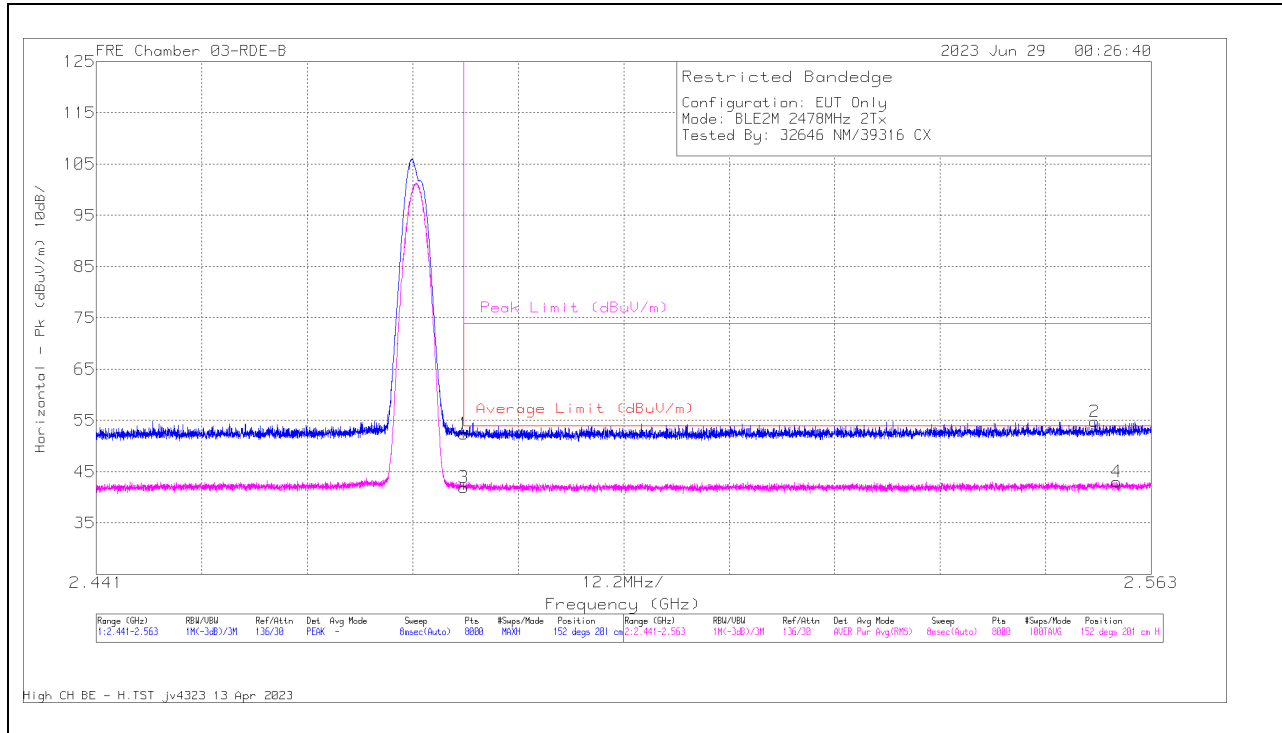

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.32	PK	32.2	0	-41.15	52.37	-	-	74	-21.63	152	201	H
3	* 2.4835	50.86	RMS	32.2	0	-41.15	41.91	54	-12.09	-	-	152	201	H
2	2.556442	63.39	PK	32.3	0	-40.9	54.79	-	-	74	-19.21	152	201	H
4	2.558974	51.63	RMS	32.3	0	-40.9	43.03	54	-10.97	-	-	152	201	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection



VERTICAL RESULT

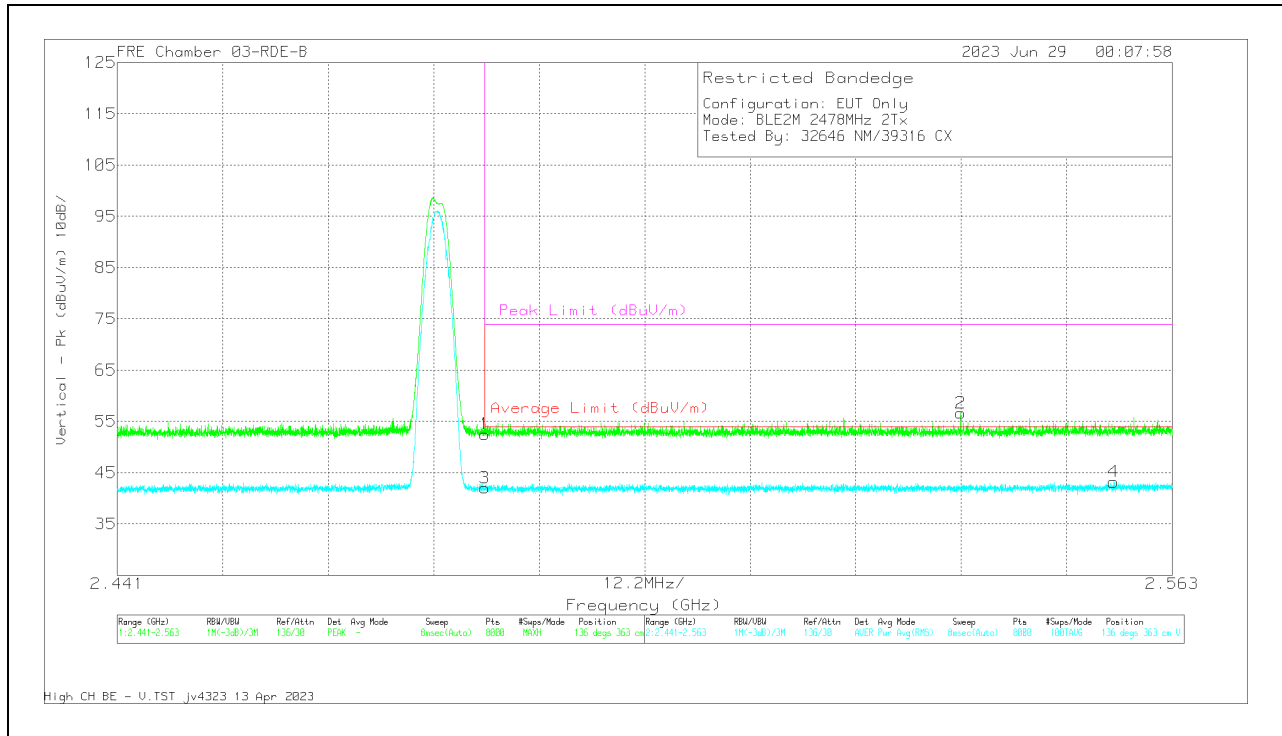

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.47	Pk	32.2	0	-41.15	52.52	-	-	74	-21.48	136	363	V
3	* 2.4835	50.97	RMS	32.2	0	-41.15	42.02	54	-11.98	-	-	136	363	V
2	2.538537	65.26	Pk	32.3	0	-40.95	56.61	-	-	74	-17.39	136	363	V
4	2.556198	51.81	RMS	32.3	0	-40.9	43.21	54	-10.79	-	-	136	363	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.2.5. HARMONICS AND SPURIOUS EMISSIONS LOW CHANNEL RESULTS

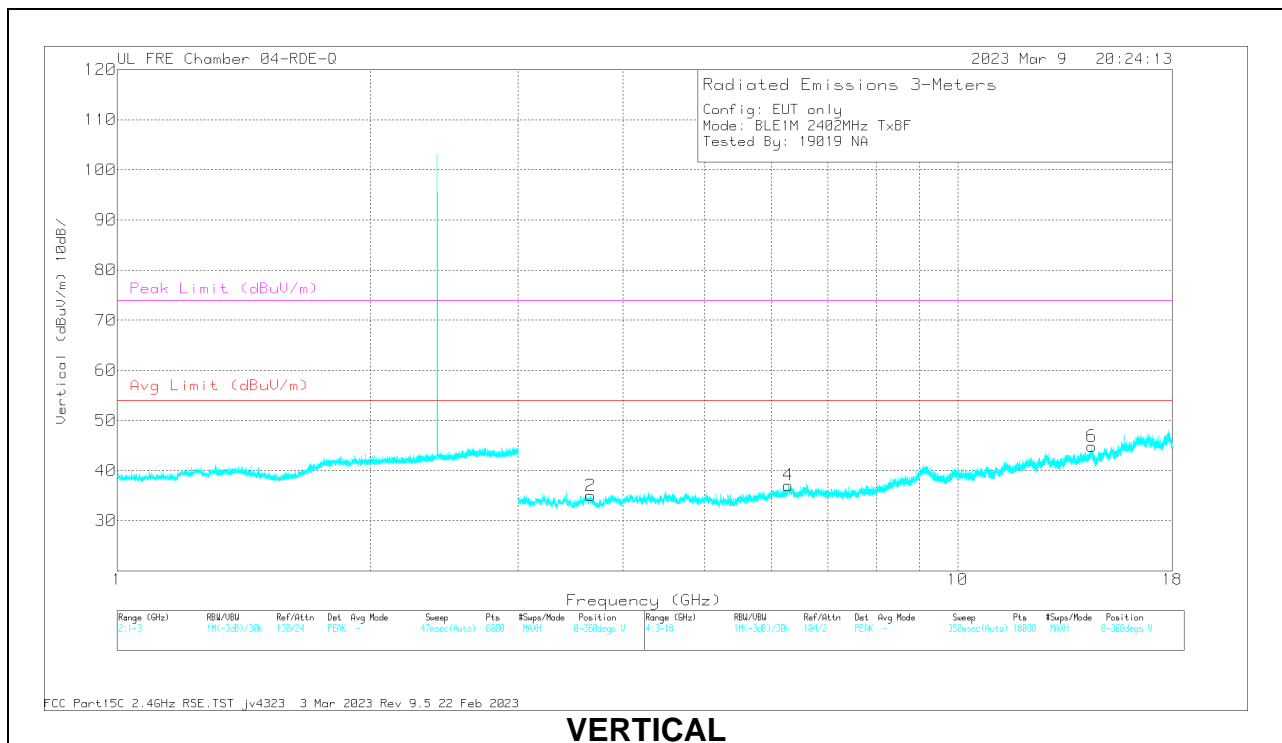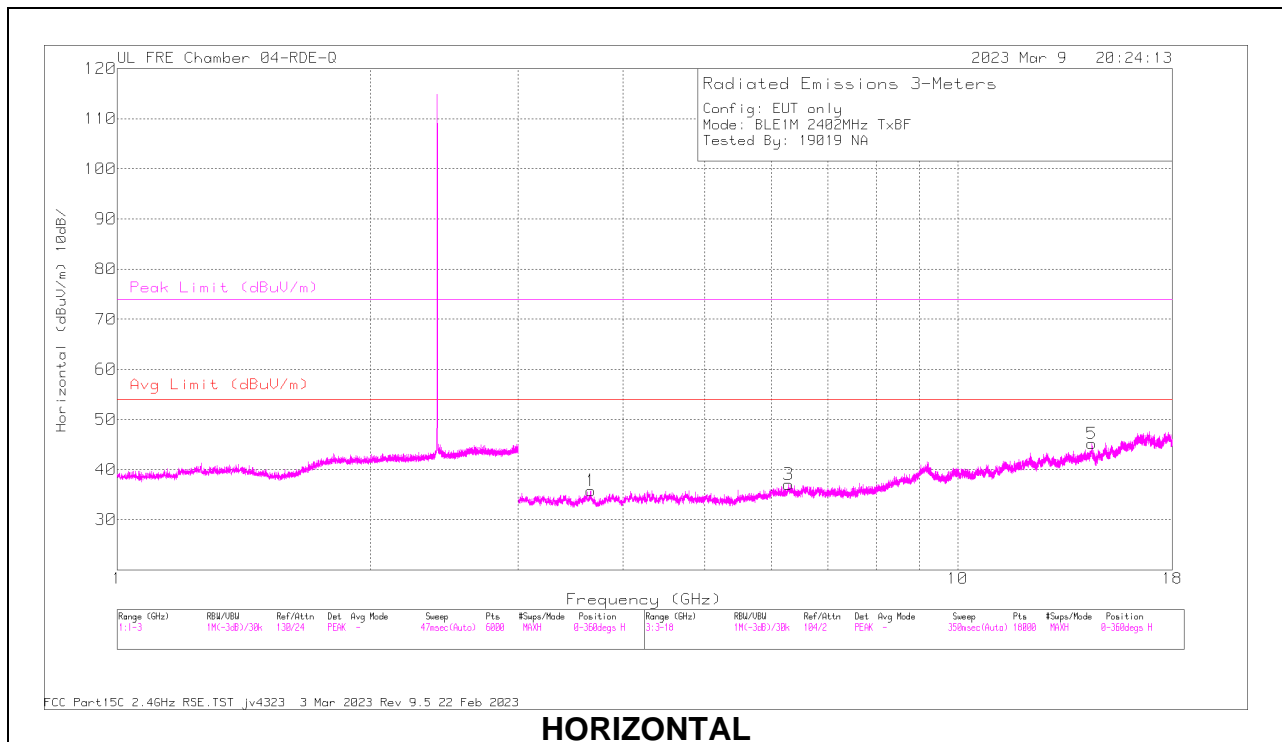


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB) - 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.661687	56.4	PK2	32.9	-44.45	44.85	-	-	74	-29.15	278	167	H
1	* 3.66066	44.89	MAv1	32.9	-44.53	33.26	54	-20.74	-	-	278	167	H
2	* 3.65574	57.61	PK2	32.9	-44.43	46.08	-	-	74	-27.92	116	142	V
2	* 3.653939	45.23	MAv1	32.9	-44.58	33.55	54	-20.45	-	-	116	142	V
3	6.289337	55.95	PK2	35.7	-44.23	47.42	-	-	-	-	208	156	H
4	6.28418	55.17	PK2	35.7	-44.31	46.56	-	-	-	-	251	122	V
5	14.437554	56.4	PK2	39.3	-42.48	53.22	-	-	-	-	136	310	H
6	14.444478	57.49	PK2	39.3	-42.4	54.39	-	-	-	-	332	279	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

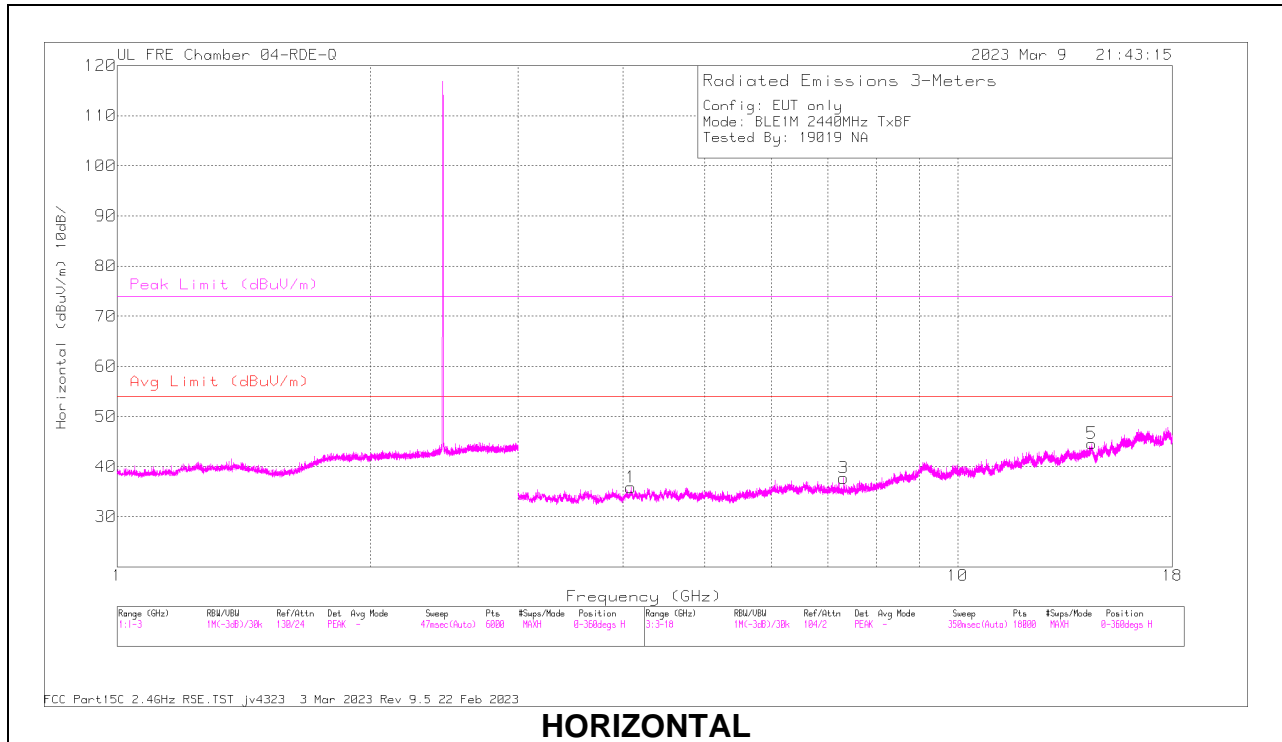

HORIZONTAL

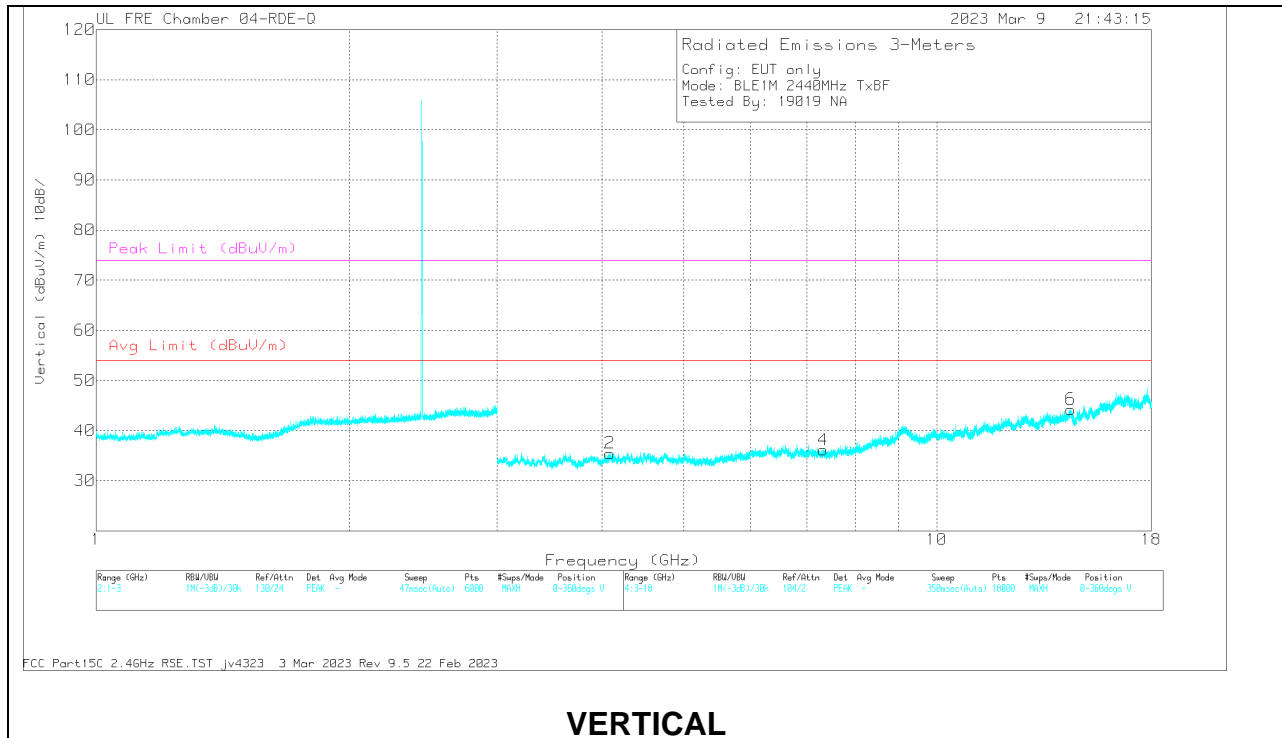

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB) - 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.084178	57.35	PK2	33.4	-45.44	45.31	-	-	74	-28.69	80	209	H
1	* 4.083254	45.66	MAv1	33.4	-45.39	33.67	54	-20.33	-	-	80	209	H
2	* 4.083197	57.64	PK2	33.4	-45.39	45.65	-	-	74	-28.35	65	171	V
2	* 4.08246	45.78	MAv1	33.4	-45.35	33.83	54	-20.17	-	-	65	171	V
3	* 7.315006	75.46	PK2	35.5	-44.65	66.31	-	-	74	-7.69	321	149	H
3	* 7.317469	43.56	MAv1	35.5	-44.75	34.31	54	-19.69	-	-	321	149	H
4	* 7.327448	55.09	PK2	35.5	-44.56	46.03	-	-	74	-27.97	172	168	V
4	* 7.32736	43.7	MAv1	35.5	-44.56	34.64	54	-19.36	-	-	172	168	V
5	14.437122	56.38	PK2	39.3	-42.5	53.18	-	-	-	-	240	114	H
6	14.440195	56.73	PK2	39.3	-42.4	53.63	-	-	-	-	100	135	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

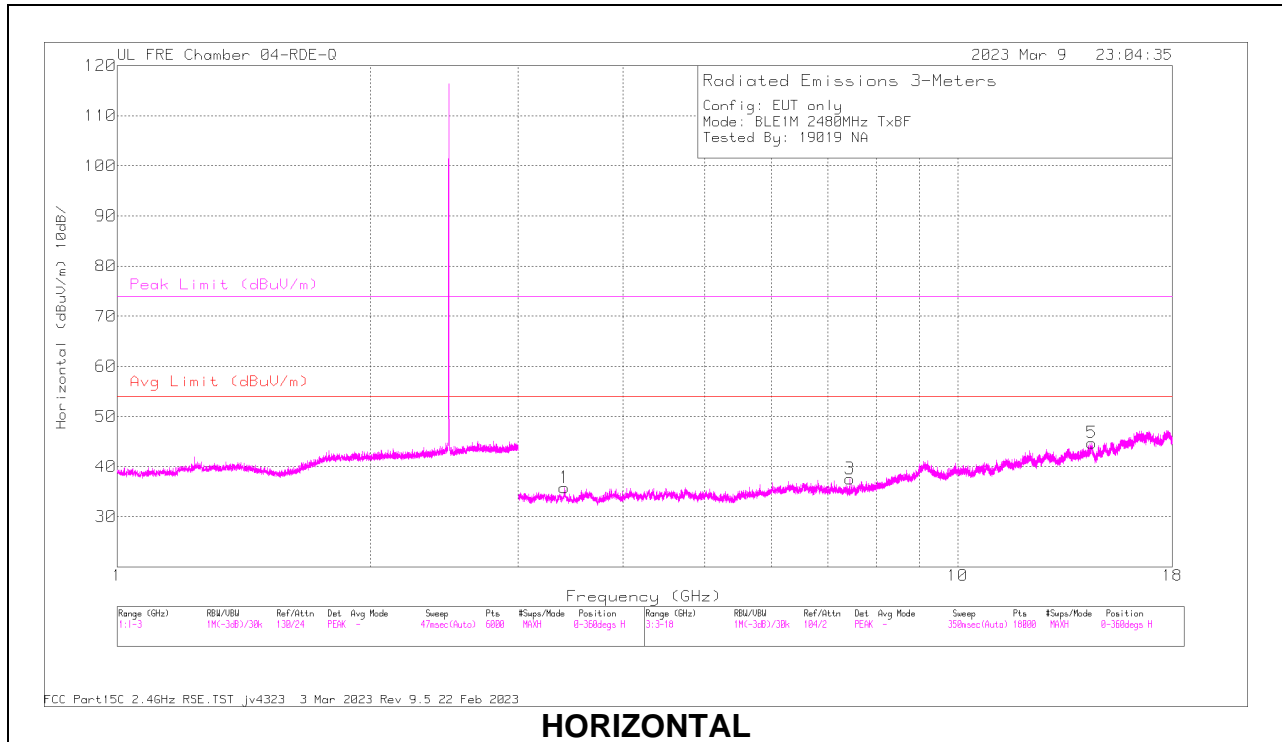

HORIZONTAL

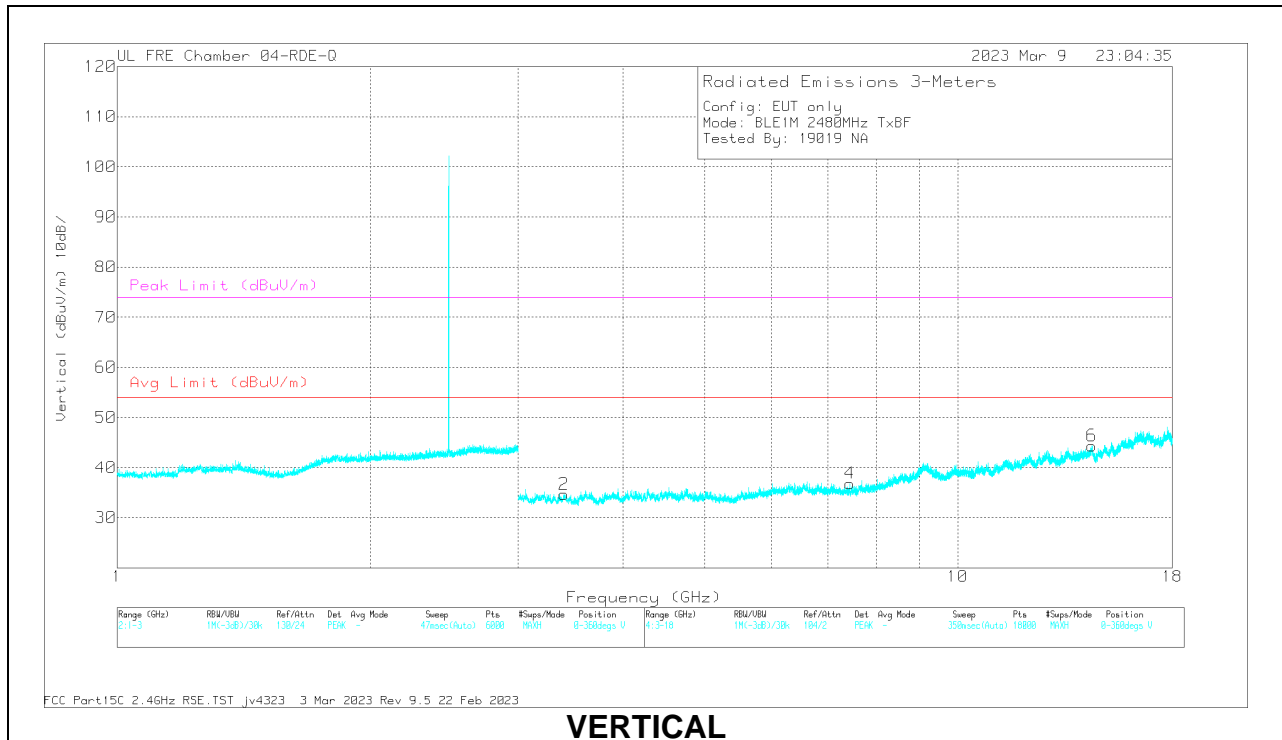

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB) - 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.403286	57.09	PK2	32.8	-45.16	44.73	-	-	-	-	76	152	H
2	3.40034	57.44	PK2	32.8	-45.18	45.06	-	-	-	-	208	149	V
3	* 7.43656	74.42	PK2	35.4	-44.65	65.17	-	-	74	-8.83	2	368	H
3	* 7.439093	43.35	MAv1	35.4	-44.48	34.27	54	-19.73	-	-	2	368	H
4	* 7.436803	63.87	PK2	35.4	-44.65	54.62	-	-	74	-19.38	53	248	V
4	* 7.43899	43.37	MAv1	35.4	-44.47	34.3	54	-19.7	-	-	53	248	V
5	14.433109	57.03	PK2	39.3	-42.54	53.79	-	-	-	-	17	223	H
6	14.437178	56.37	PK2	39.3	-42.5	53.17	-	-	-	-	179	133	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

10.2.6. LOW POWER BLE (1Mbps)

ANT 4

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

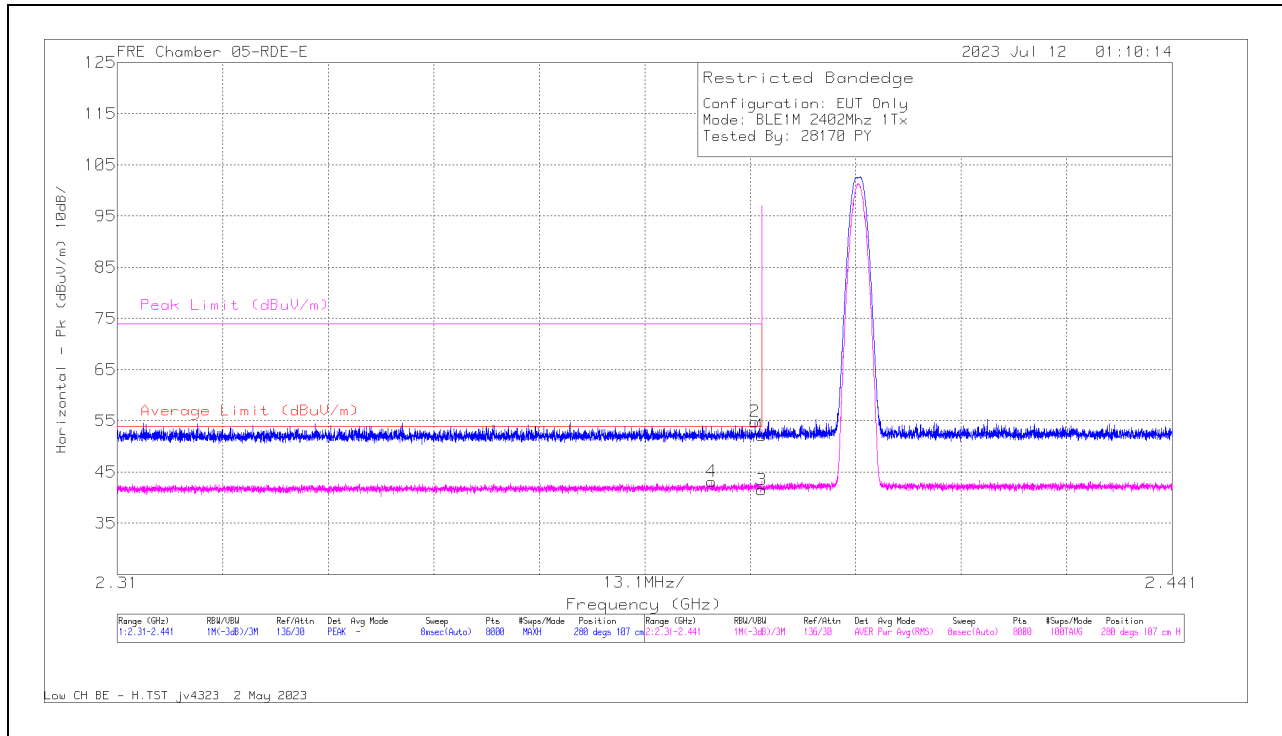

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	60.66	Pk	32	-40.5	52.16	-	-	74	-21.84	280	107	H
2	2.389199	63.43	Pk	31.9	-40.49	54.84	-	-	74	-19.16	280	107	H
3	2.39	50.01	RMS	32	-40.5	41.51	54	-12.49	-	-	280	107	H
4	2.383795	51.78	RMS	31.9	-40.54	43.14	54	-10.86	-	-	280	107	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

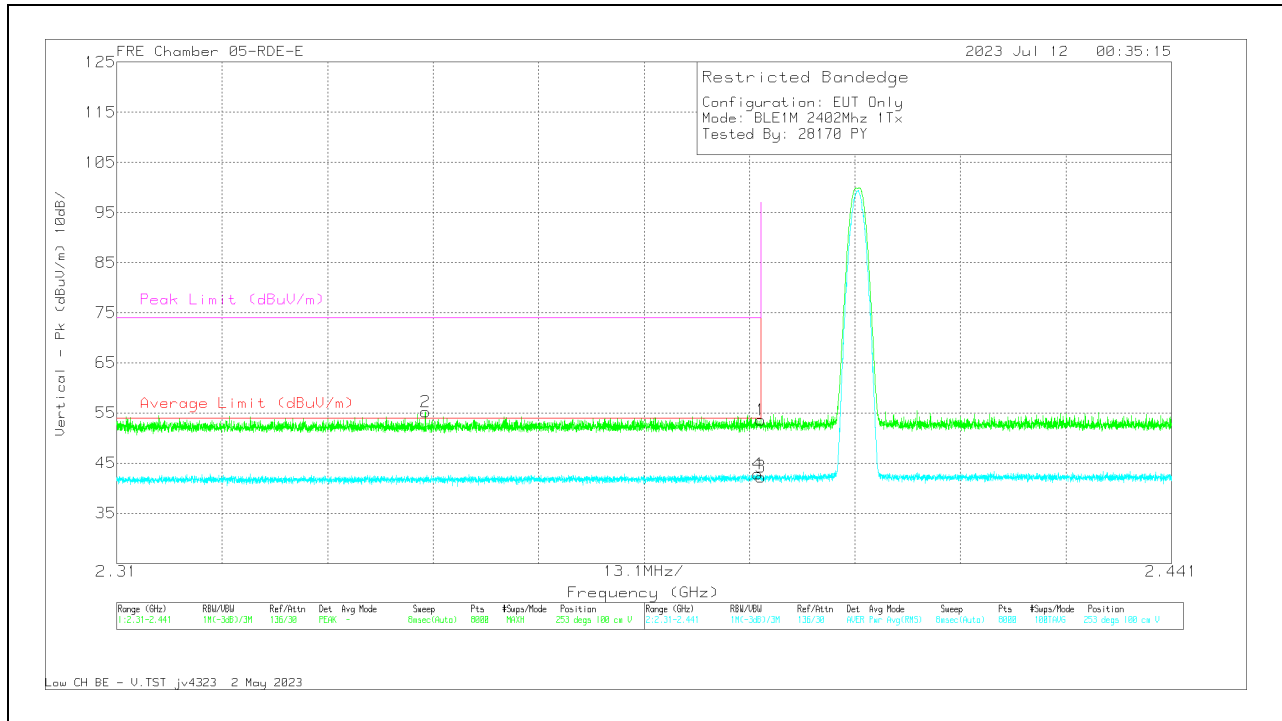


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	62.13	Pk	32	-40.5	53.63	-	-	74	-20.37	253	100	V
2	2.348339	64.02	Pk	31.8	-40.58	55.24	-	-	74	-18.76	253	100	V
3	2.39	50.77	RMS	32	-40.5	42.27	54	-11.73	-	-	253	100	V
4	2.389625	51.42	RMS	31.9	-40.5	42.82	54	-11.18	-	-	253	100	V

Pk - Peak detector
 RMS - RMS detection

BANEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

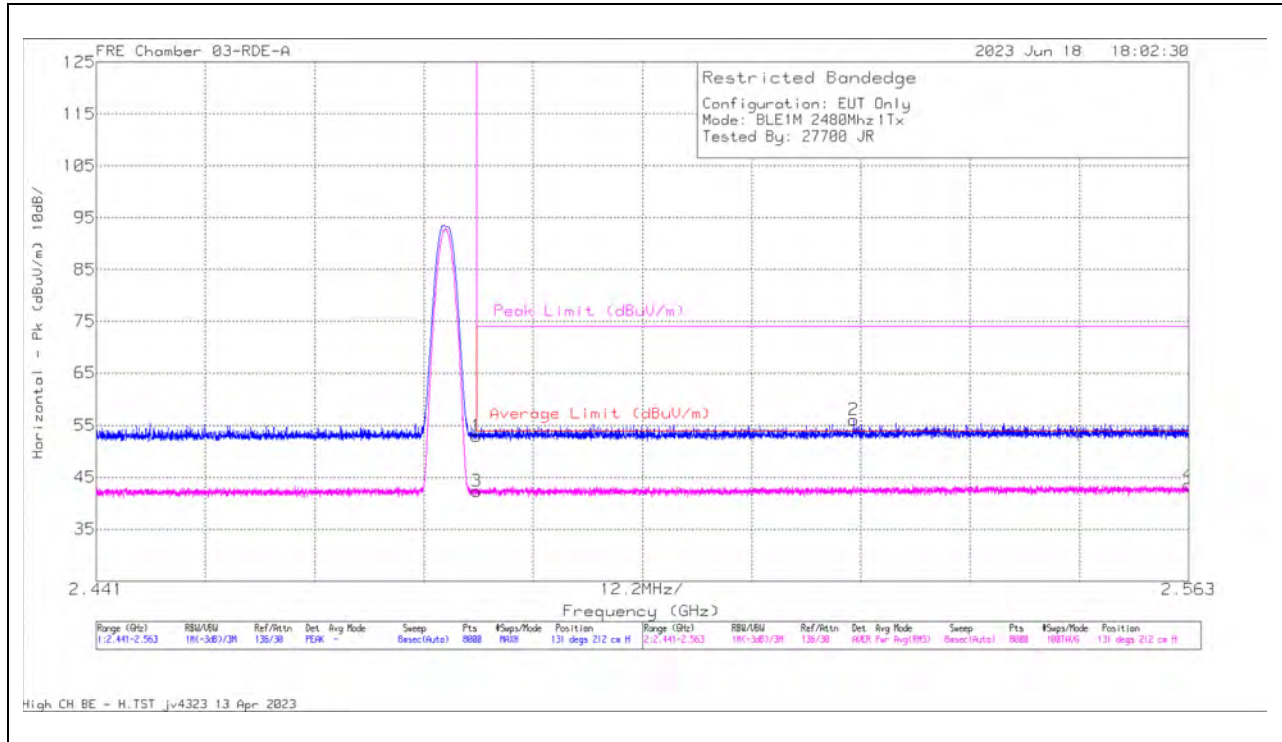

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	60.73	Pk	32.3	0	-40.11	52.92	-	-	74	-21.08	131	212	H
2	2.525603	63.69	Pk	32.4	0	-40.02	56.07	-	-	74	-17.93	131	212	H
3	* 2.4835	50.15	RMS	32.3	0	-40.11	42.34	54	-11.66	-	-	131	212	H
4	2.562986	51.08	RMS	32.5	0	-39.97	43.61	54	-10.39	-	-	131	212	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

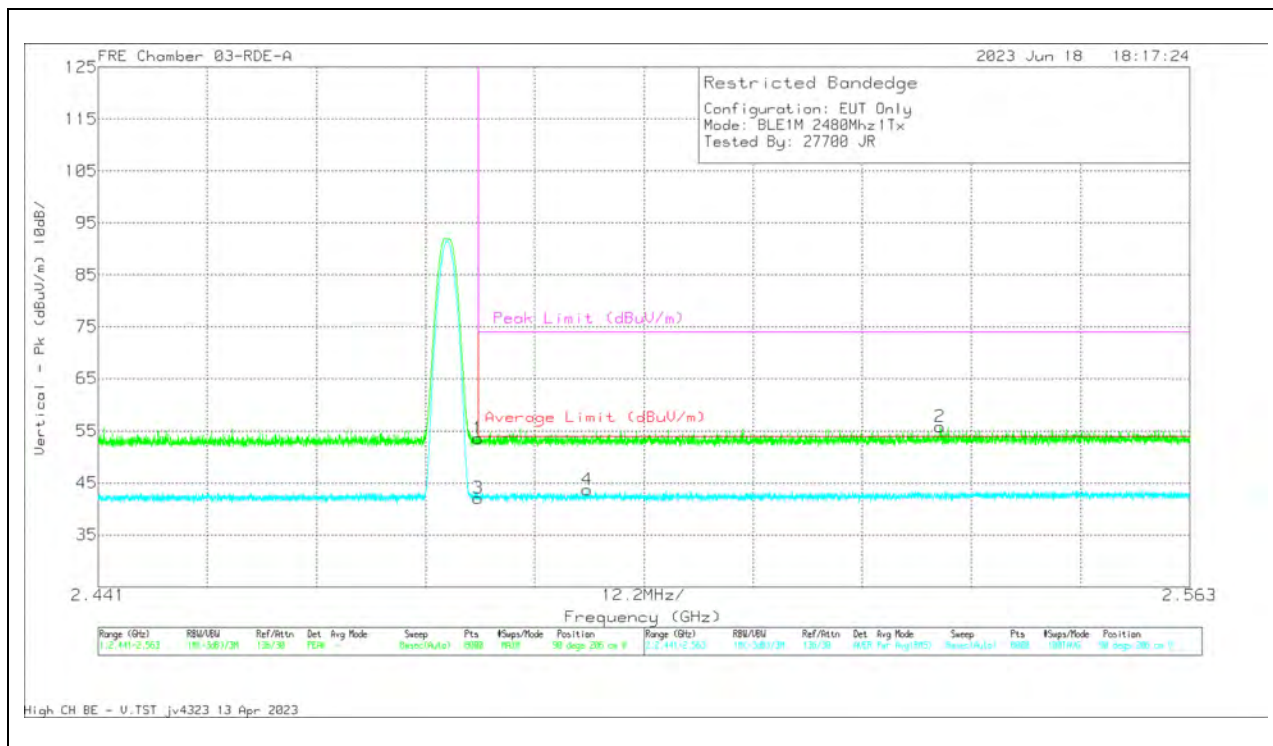


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.42	Pk	32.3	0	-40.11	53.61	-	-	74	-20.39	90	206	V
2	2.53512	63.4	Pk	32.5	0	-40	55.9	-	-	74	-18.1	90	206	V
3	* 2.4835	49.85	RMS	32.3	0	-40.11	42.04	54	-11.96	-	-	90	206	V
4	* 2.495663	51.51	RMS	32.3	0	-40.07	43.74	54	-10.26	-	-	90	206	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

ANT 3

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

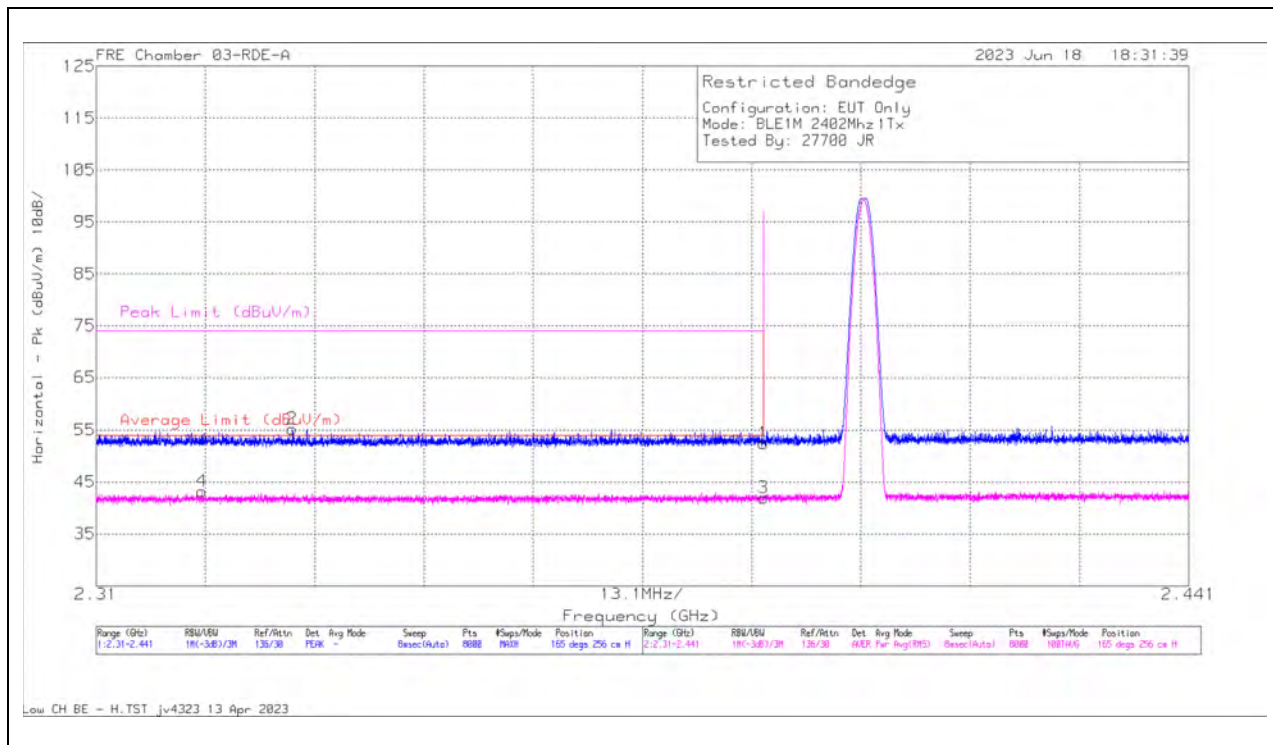


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.71	PK	32.2	0	-40.42	52.49	-	-	74	-21.51	165	256	H
2	* 2.333501	63.63	PK	32.1	0	-40.47	55.26	-	-	74	-18.74	165	256	H
3	* 2.39	50.13	RMS	32.2	0	-40.42	41.91	54	-12.09	-	-	165	256	H
4	* 2.322692	51.56	RMS	32.1	0	-40.48	43.18	54	-10.82	-	-	165	256	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

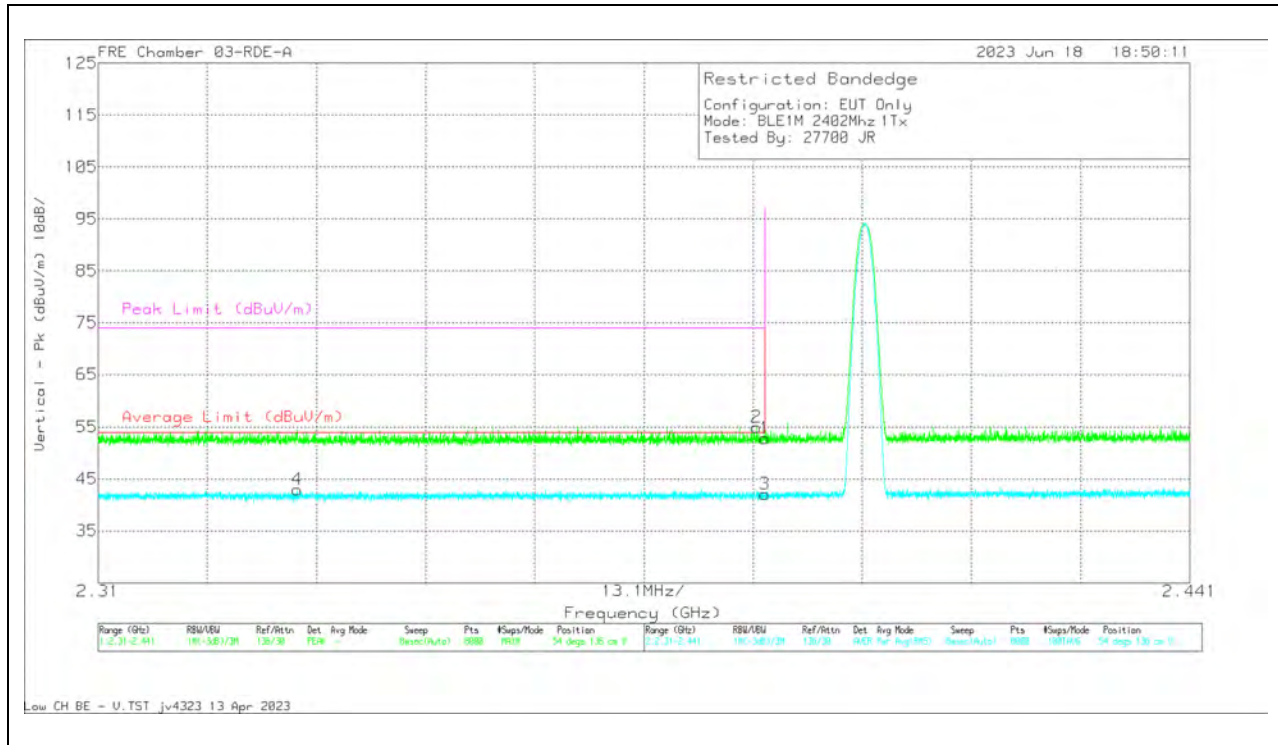


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	61.08	Pk	32.2	0	-40.42	52.86	-	-	74	-21.14	54	136	V
2	* 2.389035	63.19	Pk	32.2	0	-40.42	54.97	-	-	74	-19.03	54	136	V
3	* 2.39	50.35	RMS	32.2	0	-40.42	42.13	54	-11.87	-	-	54	136	V
4	* 2.33391	51.34	RMS	32.1	0	-40.47	42.97	54	-11.03	-	-	54	136	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

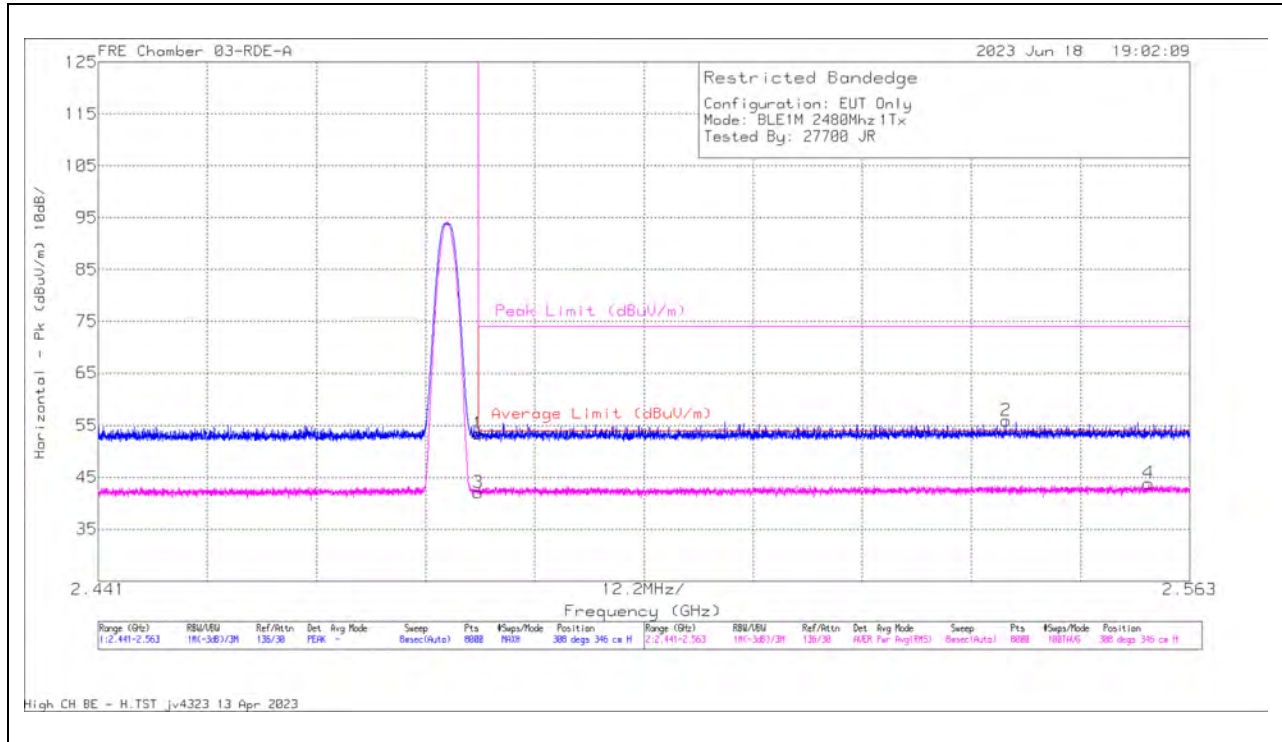

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.27	Pk	32.3	0	-40.11	53.46	-	-	74	-20.54	308	346	H
2	2.542502	63.4	Pk	32.5	0	-39.96	55.94	-	-	74	-18.06	308	346	H
3	* 2.4835	49.85	RMS	32.3	0	-40.11	42.04	54	-11.96	-	-	308	346	H
4	2.558395	51.3	RMS	32.5	0	-39.9	43.9	54	-10.1	-	-	308	346	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

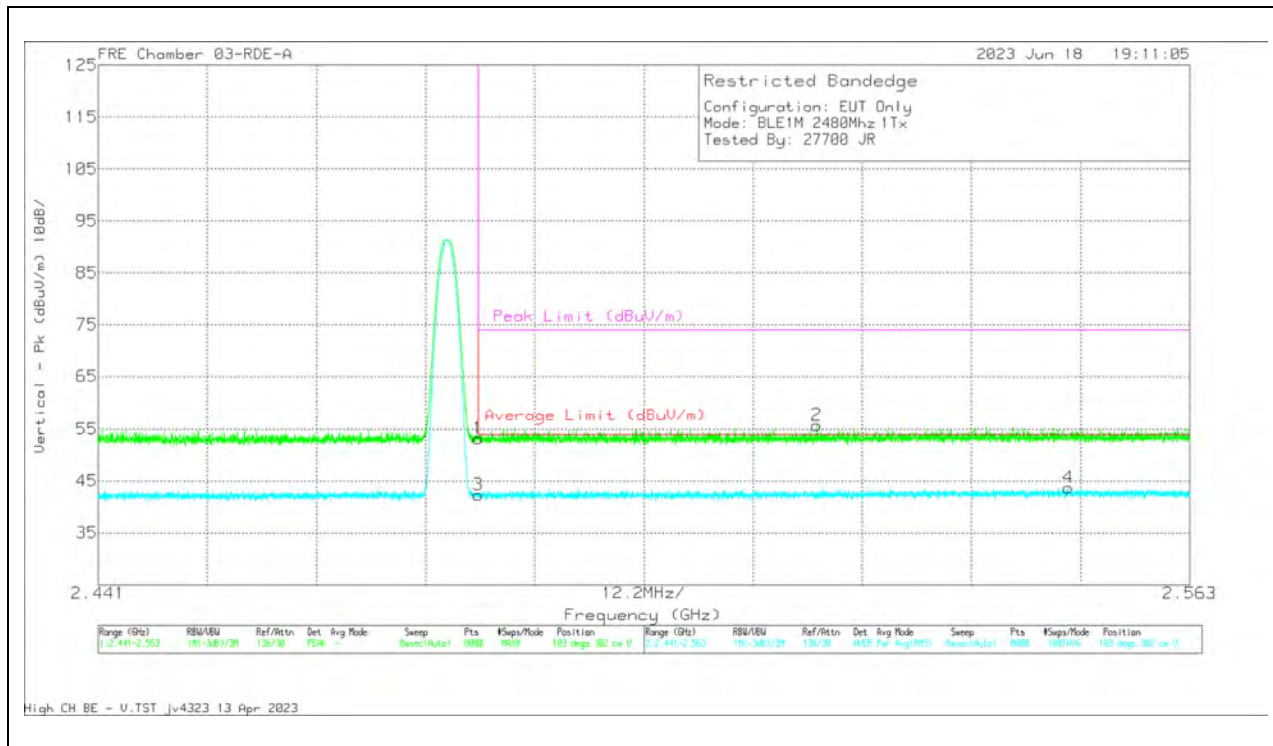

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.07	Pk	32.3	0	-40.11	53.26	-	-	74	-20.74	103	302	V
2	2.521348	63.42	Pk	32.4	0	-40.05	55.77	-	-	74	-18.23	103	302	V
3	* 2.4835	50.14	RMS	32.3	0	-40.11	42.33	54	-11.67	-	-	103	302	V
4	2.549442	51.21	RMS	32.5	0	-39.94	43.77	54	-10.23	-	-	103	302	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

10.2.7. LOW POWER BLE TXBF (1Mbps)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

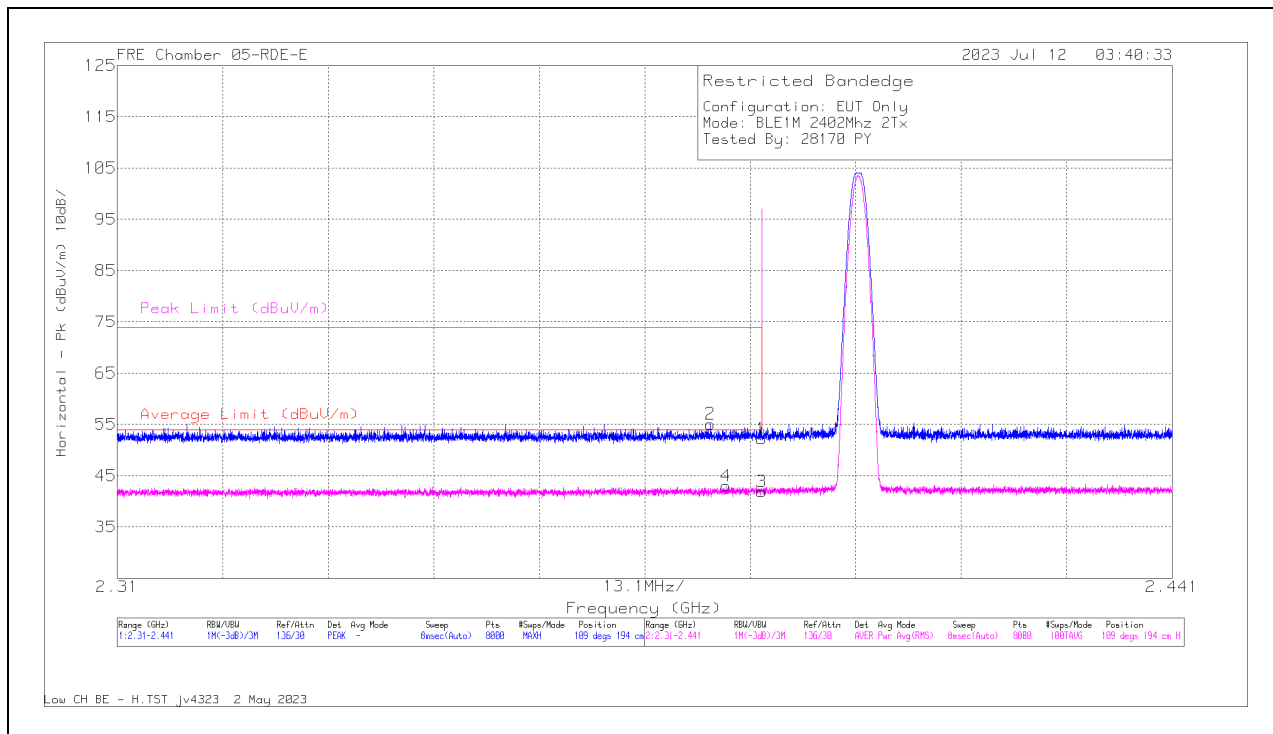

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	60.7	Pk	32	-40.5	52.2	-	-	74	-21.8	109	194	H
2	2.383631	63.7	Pk	31.9	-40.54	55.06	-	-	74	-18.94	109	194	H
3	2.39	50.37	RMS	32	-40.5	41.87	54	-12.13	-	-	109	194	H
4	2.38558	51.61	RMS	31.9	-40.51	43	54	-11	-	-	109	194	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

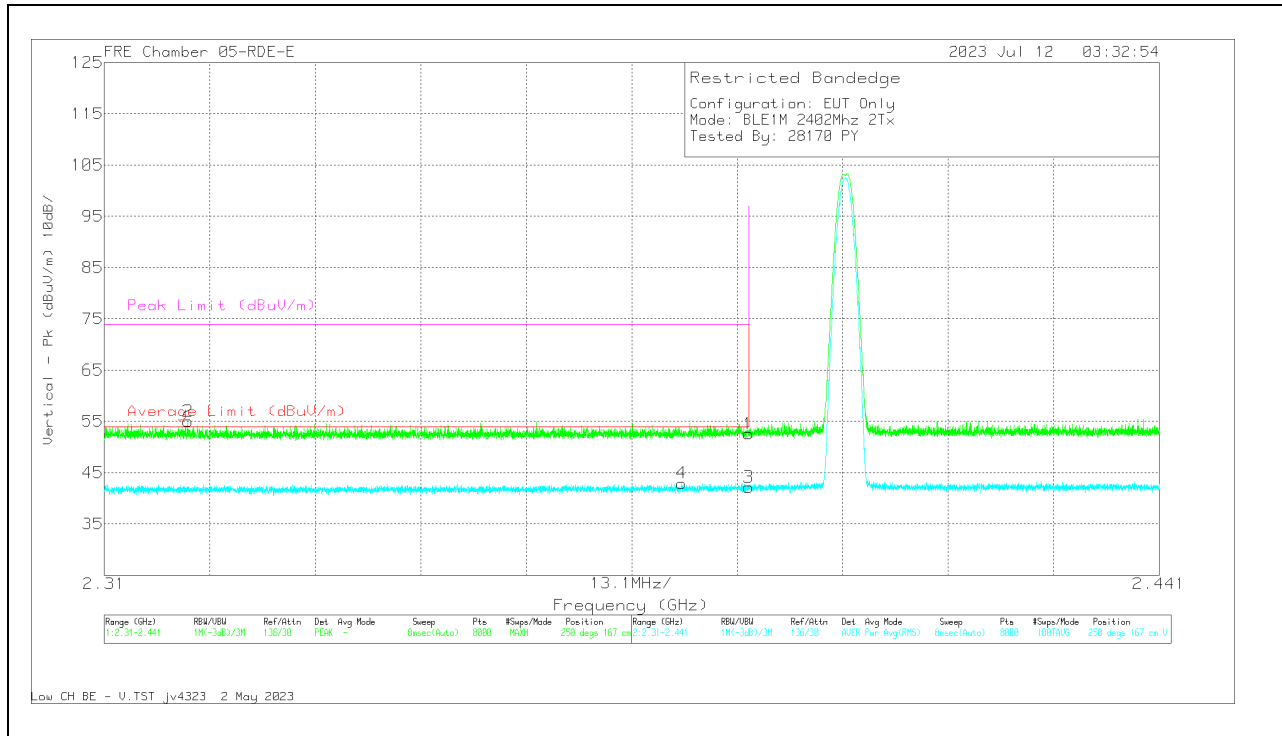


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226671 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	61.08	Pk	32	-40.5	52.58	-	-	74	-21.42	250	167	V
2	2.320399	63.84	Pk	31.8	-40.62	55.02	-	-	74	-18.98	250	167	V
3	2.39	50.66	RMS	32	-40.5	42.16	54	-11.84	-	-	250	167	V
4	2.381682	51.59	RMS	31.9	-40.54	42.95	54	-11.05	-	-	250	167	V

Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

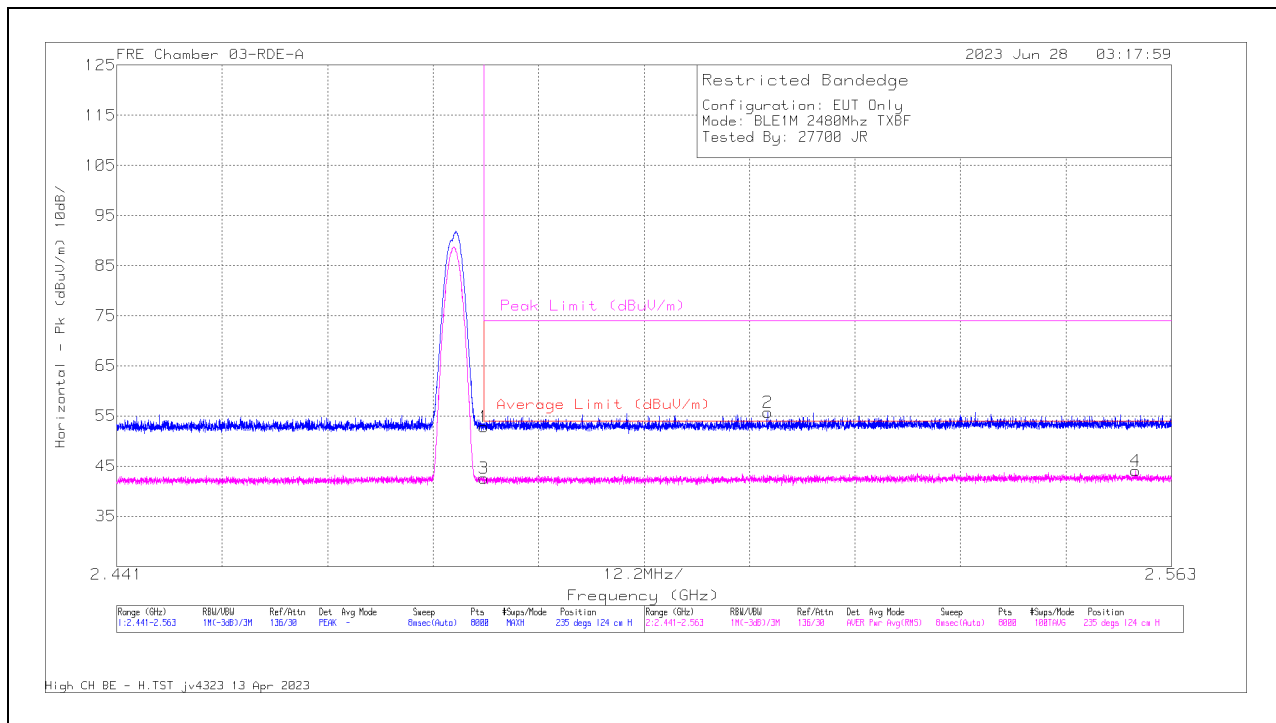

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	60.7	Pk	32.3	0	-40.11	52.89	-	-	74	-21.11	235	124	H
2	2.51633	63.31	Pk	32.4	0	-40.02	55.69	-	-	74	-18.31	235	124	H
3	* 2.4835	50.36	RMS	32.3	0	-40.11	42.55	54	-11.45	-	-	235	124	H
4	2.558852	51.44	RMS	32.5	0	-39.89	44.05	54	-9.95	-	-	235	124	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

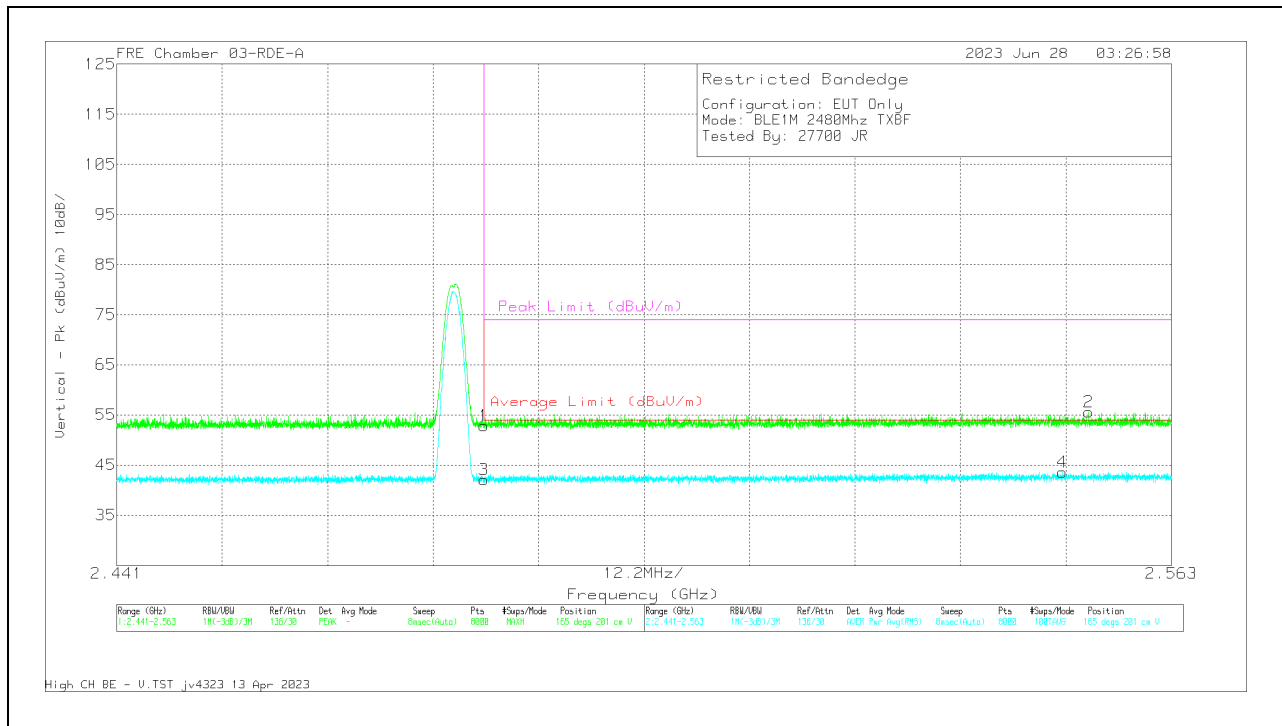

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	60.66	Pk	32.3	0	-40.11	52.85	-	-	74	-21.15	165	201	V
2	2.553438	63.03	Pk	32.5	0	-39.96	55.57	-	-	74	-18.43	165	201	V
3	* 2.4835	49.93	RMS	32.3	0	-40.11	42.12	54	-11.88	-	-	165	201	V
4	2.550387	51.01	RMS	32.5	0	-39.93	43.58	54	-10.42	-	-	165	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

10.2.8. LOW POWER BLE (2Mbps)

ANT 4

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

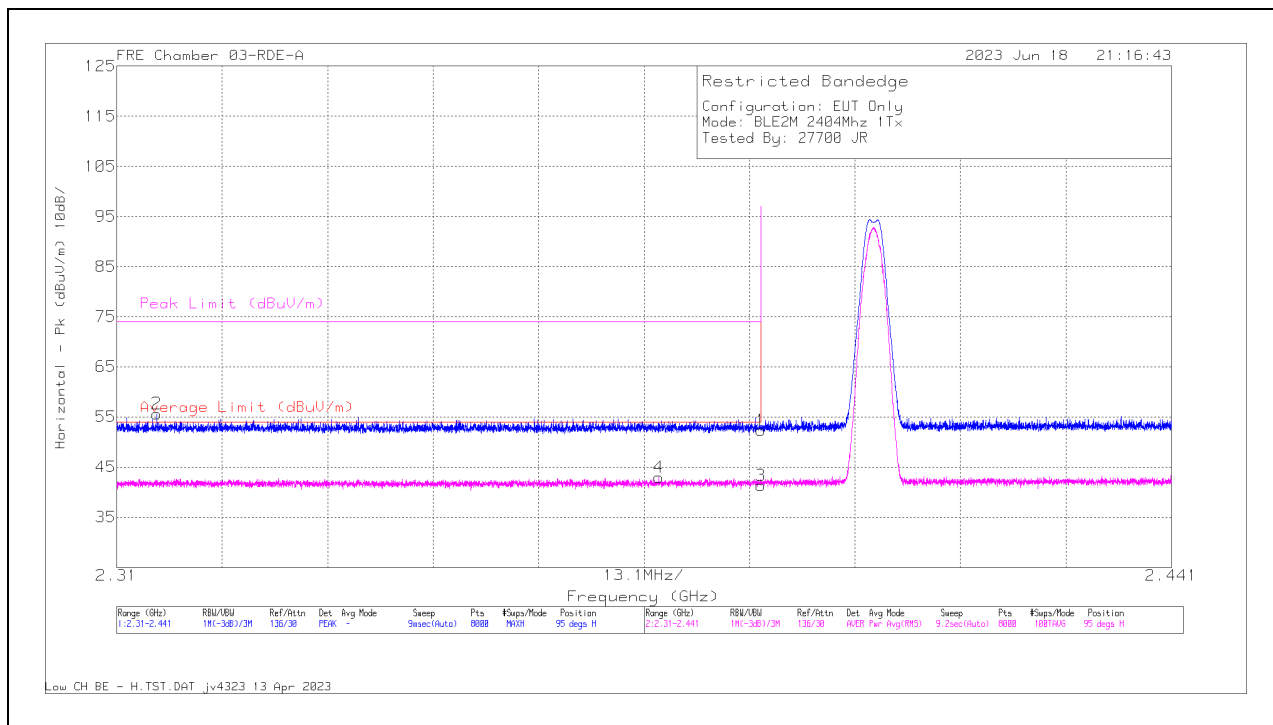


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.52	Pk	32.2	0	-40.42	52.3	-	-	74	-21.7	95	256	H
2	* 2.314995	64.15	Pk	32	0	-40.49	55.66	-	-	74	-18.34	95	256	H
3	* 2.39	49.58	RMS	32.2	0	-40.42	41.36	54	-12.64	-	-	95	256	H
4	* 2.377342	51.29	RMS	32.1	0	-40.42	42.97	54	-11.03	-	-	95	256	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

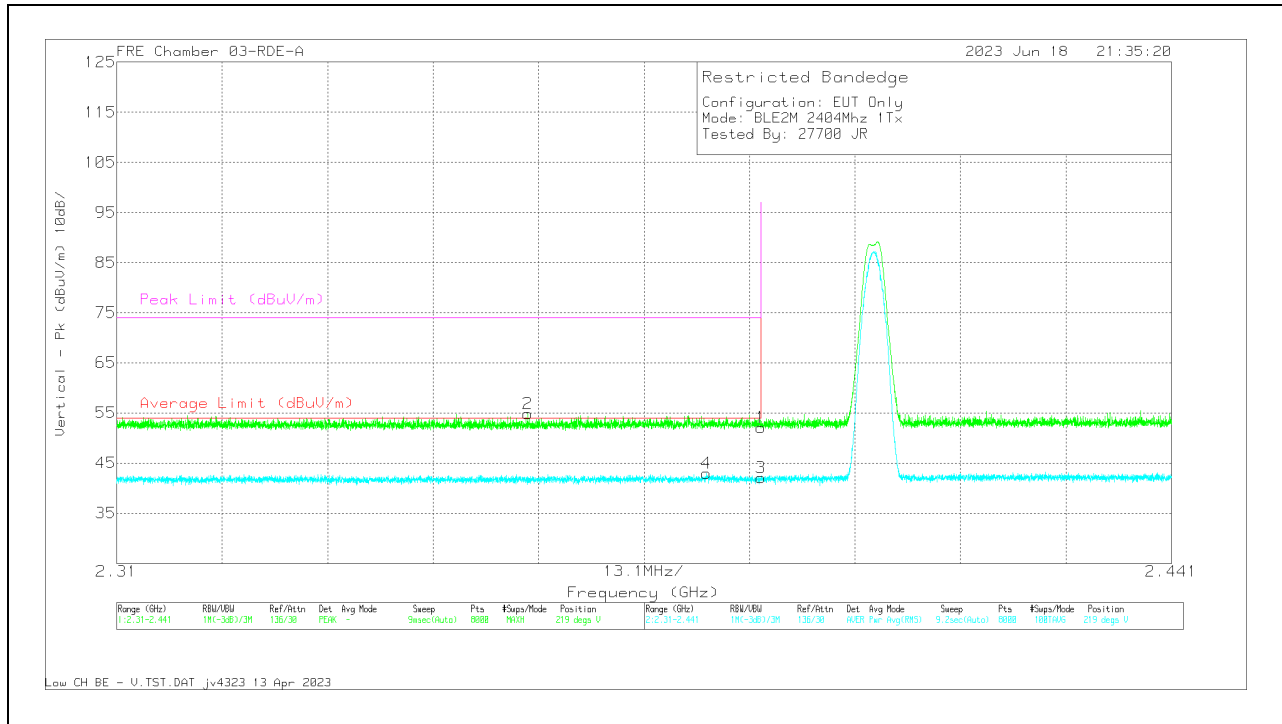


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.37	Pk	32.2	0	-40.42	52.15	-	-	74	-21.85	219	352	V
2	* 2.361047	63.19	Pk	32.1	0	-40.46	54.83	-	-	74	-19.17	219	352	V
3	* 2.39	50.35	RMS	32.2	0	-40.42	42.13	54	-11.87	-	-	219	352	V
4	* 2.383222	51.22	RMS	32.1	0	-40.4	42.92	54	-11.08	-	-	219	352	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

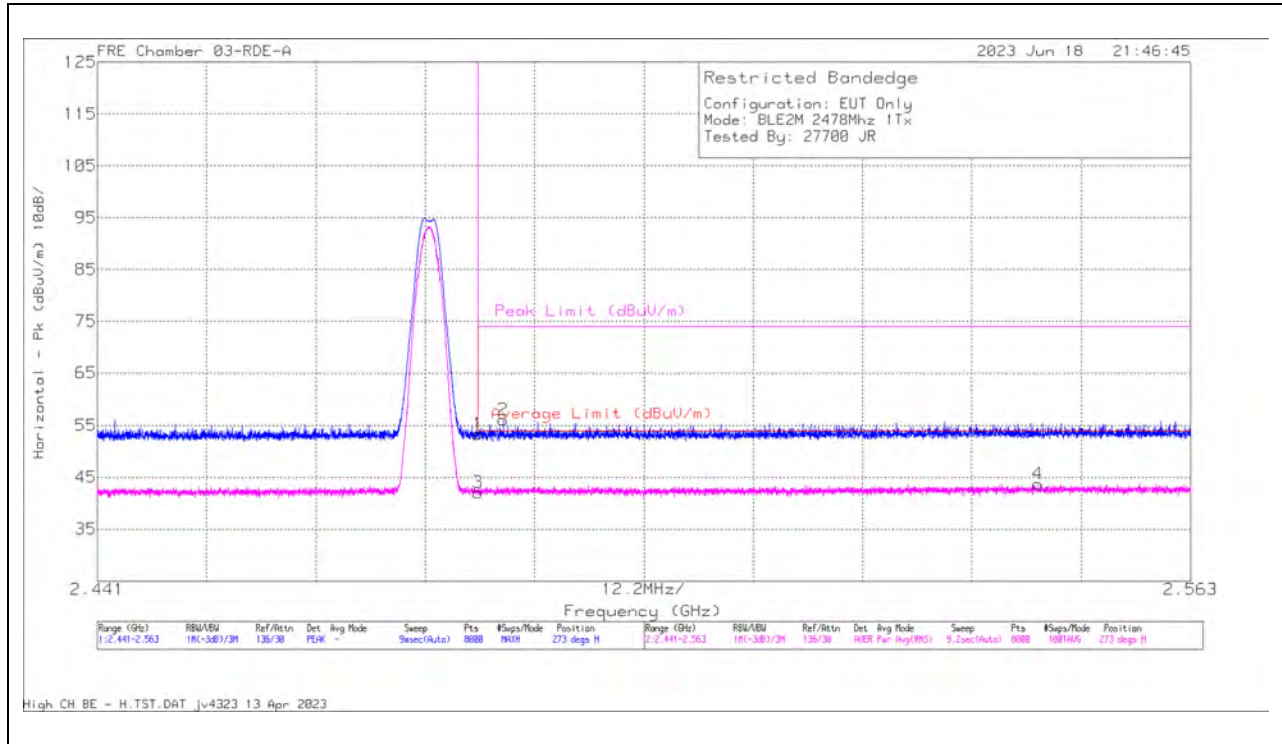

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.15	Pk	32.3	0	-40.11	53.34	-	-	74	-20.66	273	181	H
2	* 2.486314	63.84	Pk	32.3	0	-40.09	56.05	-	-	74	-17.95	273	181	H
3	* 2.4835	49.9	RMS	32.3	0	-40.11	42.09	54	-11.91	-	-	273	181	H
4	2.54598	51.23	RMS	32.5	0	-39.98	43.75	54	-10.25	-	-	273	181	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

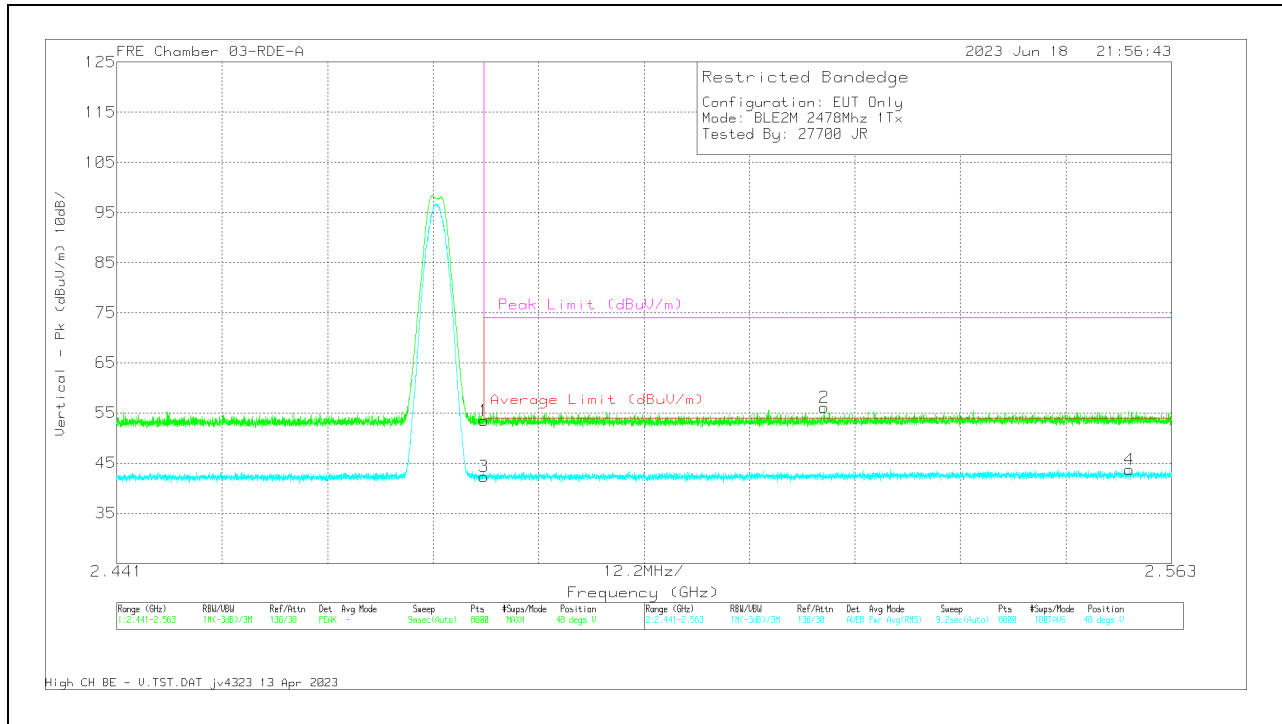


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.29	Pk	32.3	0	-40.11	53.48	-	-	74	-20.52	48	135	V
2	2.522827	63.78	Pk	32.4	0	-40.03	56.15	-	-	74	-17.85	48	135	V
3	* 2.4835	50.09	RMS	32.3	0	-40.11	42.28	54	-11.72	-	-	48	135	V
4	2.558151	51.12	RMS	32.5	0	-39.91	43.71	54	-10.29	-	-	48	135	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

ANT 3

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

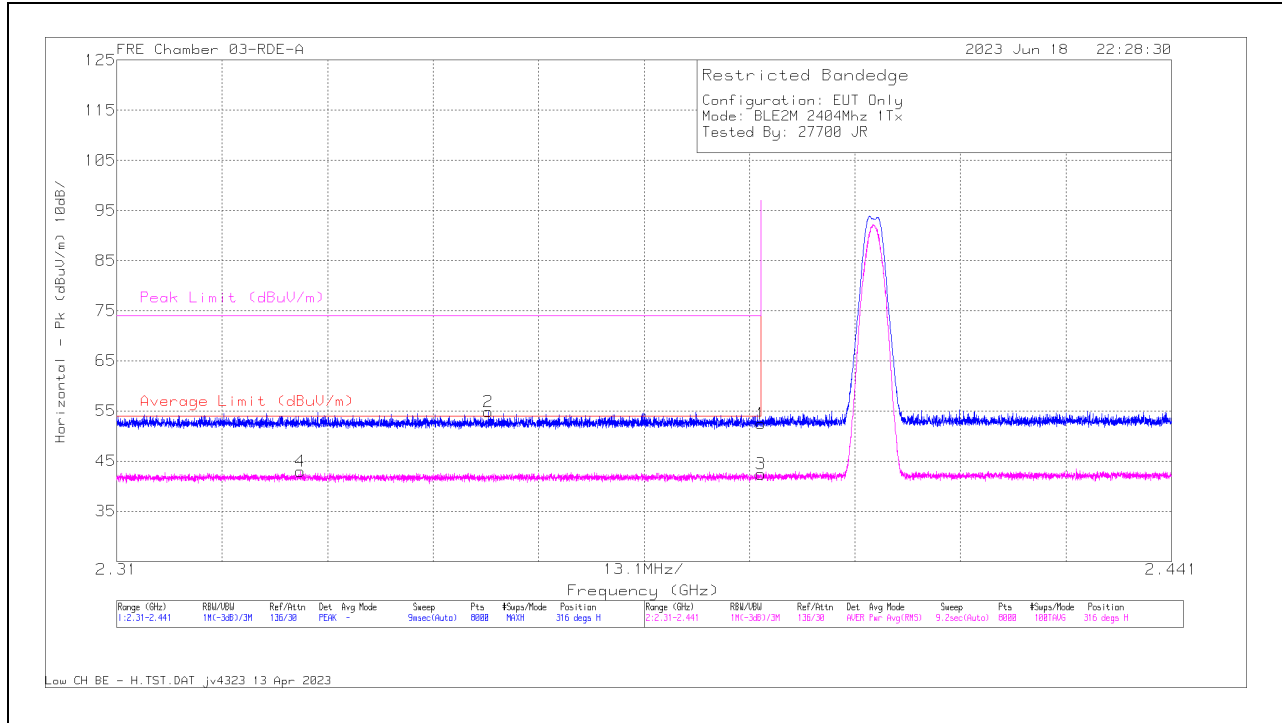

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.7	Pk	32.2	0	-40.42	52.48	-	-	74	-21.52	316	198	H
2	* 2.356167	63.17	Pk	32.1	0	-40.47	54.8	-	-	74	-19.2	316	198	H
3	* 2.39	50.62	RMS	32.2	0	-40.42	42.4	54	-11.6	-	-	316	198	H
4	* 2.332797	51.28	RMS	32.1	0	-40.46	42.92	54	-11.08	-	-	316	198	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

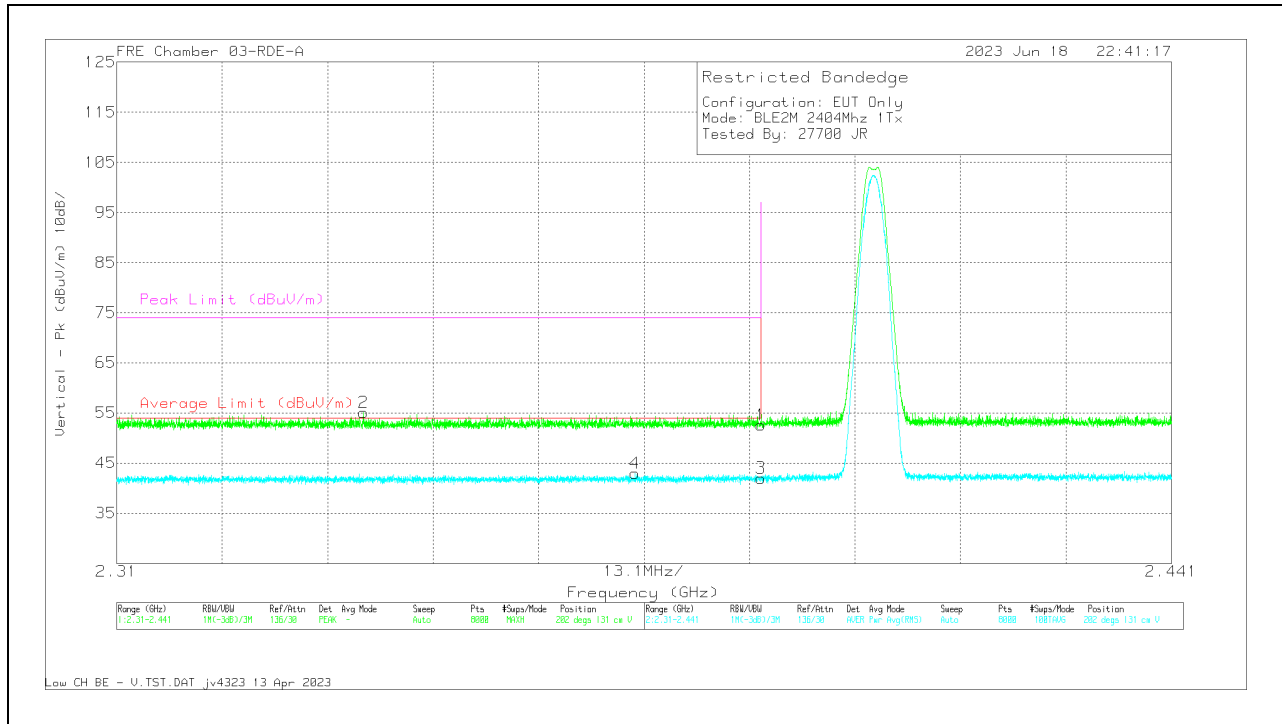


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.79	Pk	32.2	0	-40.42	52.57	-	-	74	-21.43	202	131	V
2	* 2.340625	63.42	Pk	32.1	0	-40.47	55.05	-	-	74	-18.95	202	131	V
3	* 2.39	50.24	RMS	32.2	0	-40.42	42.02	54	-11.98	-	-	202	131	V
4	* 2.374378	51.22	RMS	32.1	0	-40.41	42.91	54	-11.09	-	-	202	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

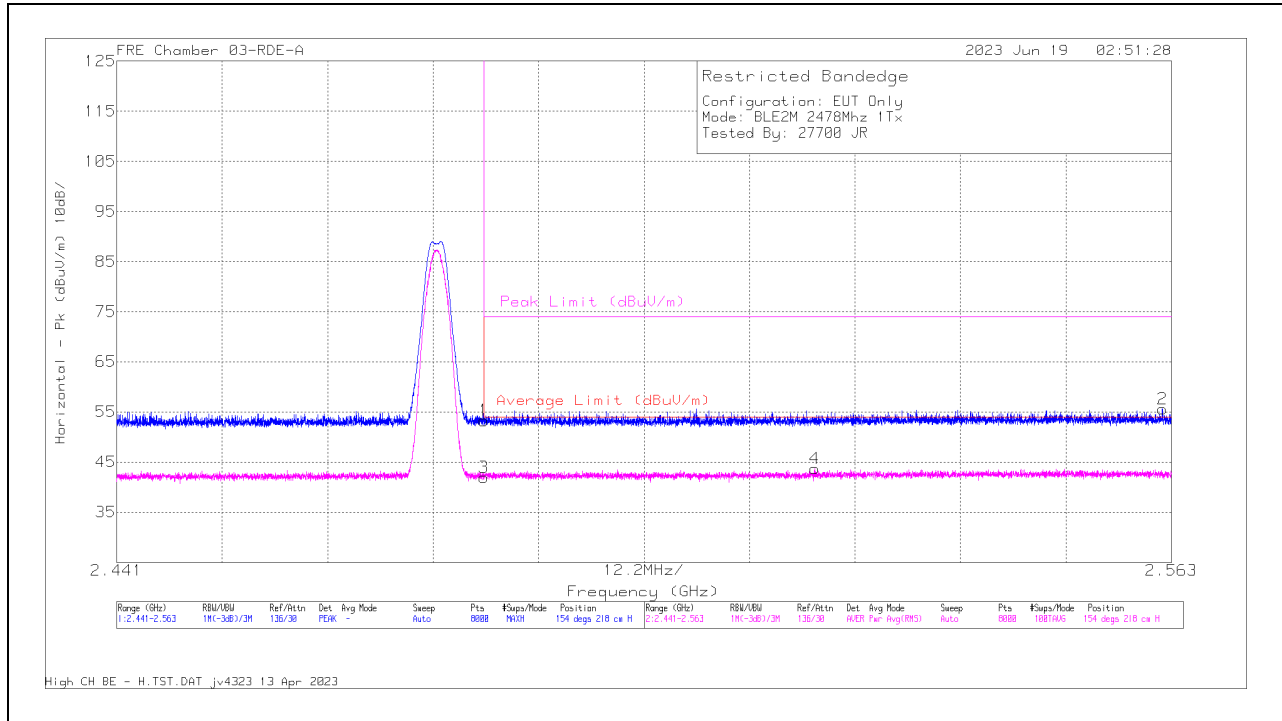

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.1	Pk	32.3	0	-40.11	53.29	-	-	74	-20.71	154	218	H
2	2.561948	63.03	Pk	32.5	0	-39.96	55.57	-	-	74	-18.43	154	218	H
3	* 2.4835	49.74	RMS	32.3	0	-40.11	41.93	54	-12.07	-	-	154	218	H
4	2.521729	51.34	RMS	32.4	0	-40.04	43.7	54	-10.3	-	-	154	218	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

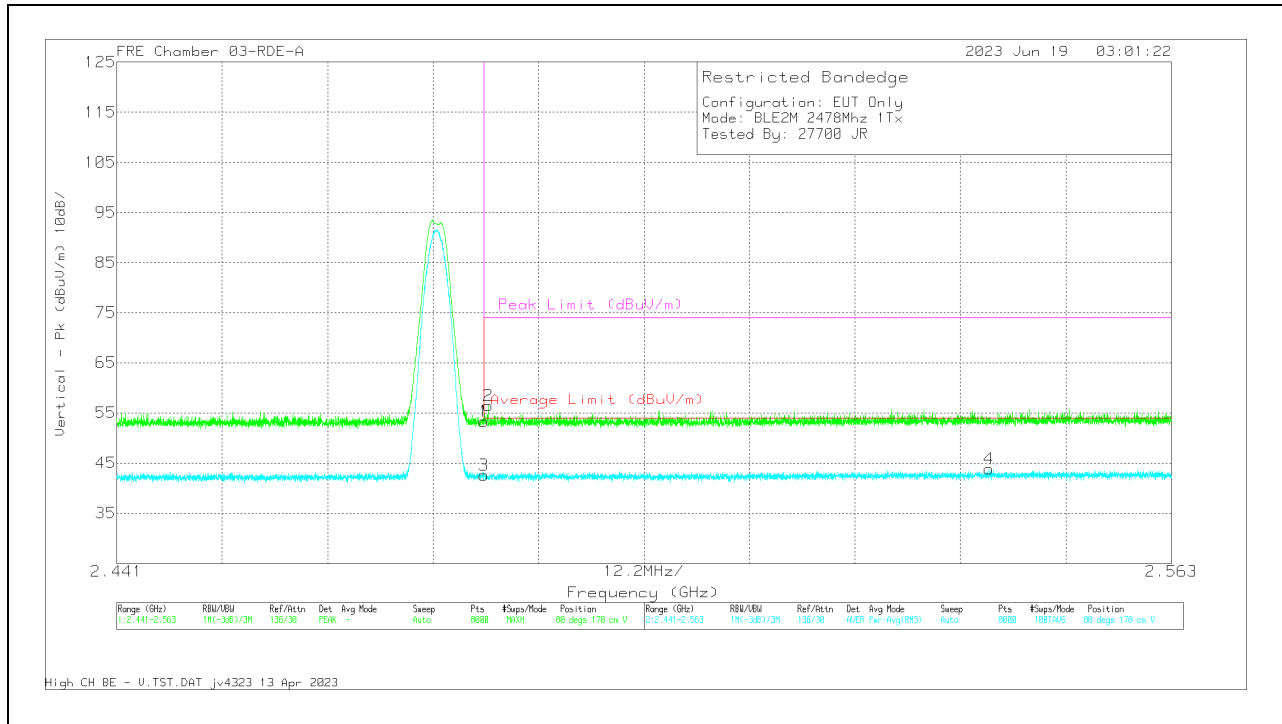


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230299 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	61.17	Pk	32.3	0	-40.11	53.36	-	-	74	-20.64	80	170	V
2	* 2.483965	64.26	Pk	32.3	0	-40.11	56.45	-	-	74	-17.55	80	170	V
3	* 2.4835	50.41	RMS	32.3	0	-40.11	42.6	54	-11.4	-	-	80	170	V
4	2.541907	51.26	RMS	32.5	0	-39.95	43.81	54	-10.19	-	-	80	170	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.2.9. **LOW POWER BLE TXBF (2Mbps)**

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

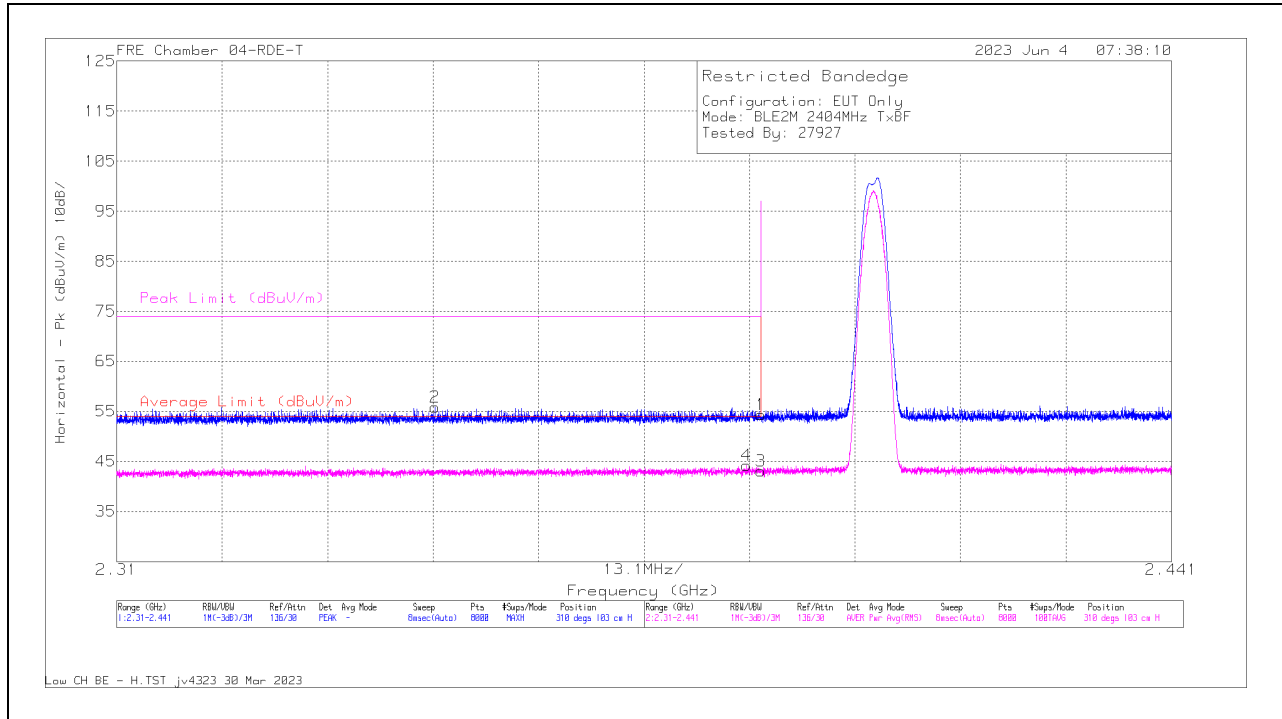


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.1	Pk	32.1	-37.89	54.31	-	-	74	-19.69	310	103	H
2	* 2.349518	61.9	Pk	31.9	-37.9	55.9	-	-	74	-18.1	310	103	H
3	* 2.39	48.85	RMS	32.1	-37.89	43.06	54	-10.94	-	-	310	103	H
4	* 2.388217	49.93	RMS	32.1	-37.87	44.16	54	-9.84	-	-	310	103	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

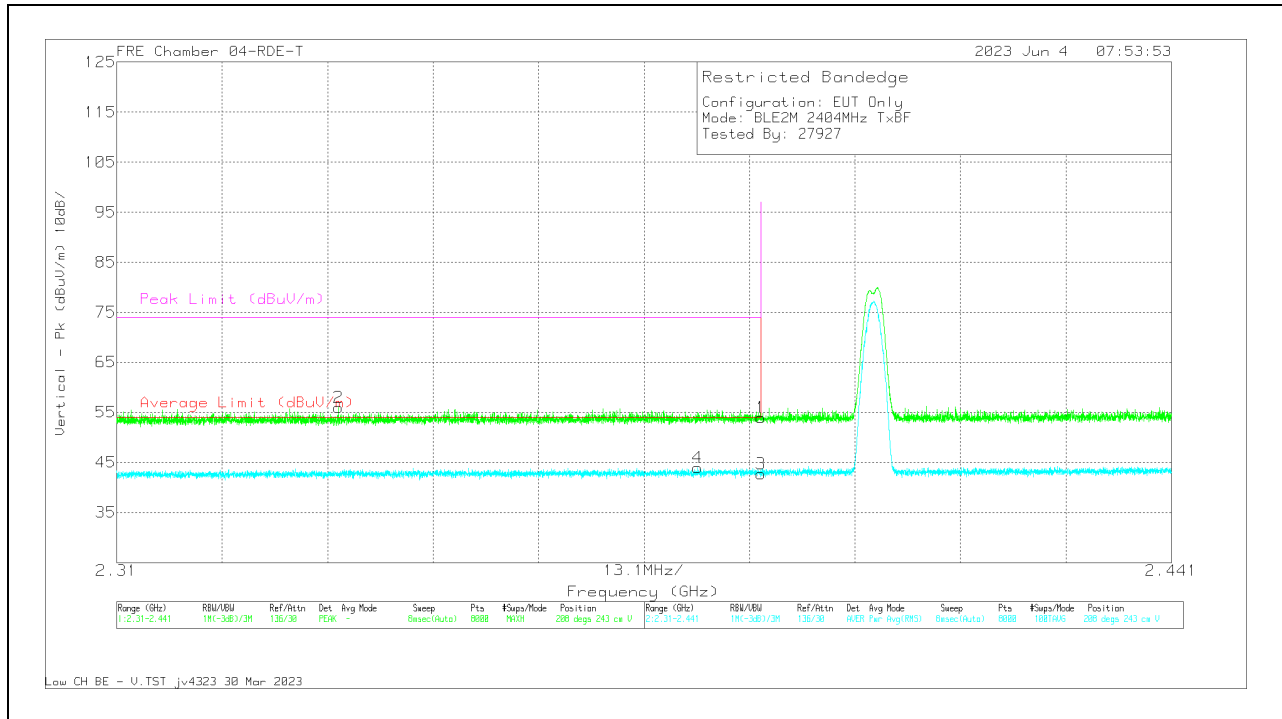


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	59.75	PK	32.1	-37.89	53.96	-	-	74	-20.04	208	243	V
2	* 2.337562	61.95	PK	31.9	-37.89	55.96	-	-	74	-18.04	208	243	V
3	* 2.39	48.54	RMS	32.1	-37.89	42.75	54	-11.25	-	-	208	243	V
4	* 2.382173	49.71	RMS	32.1	-37.89	43.92	54	-10.08	-	-	208	243	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

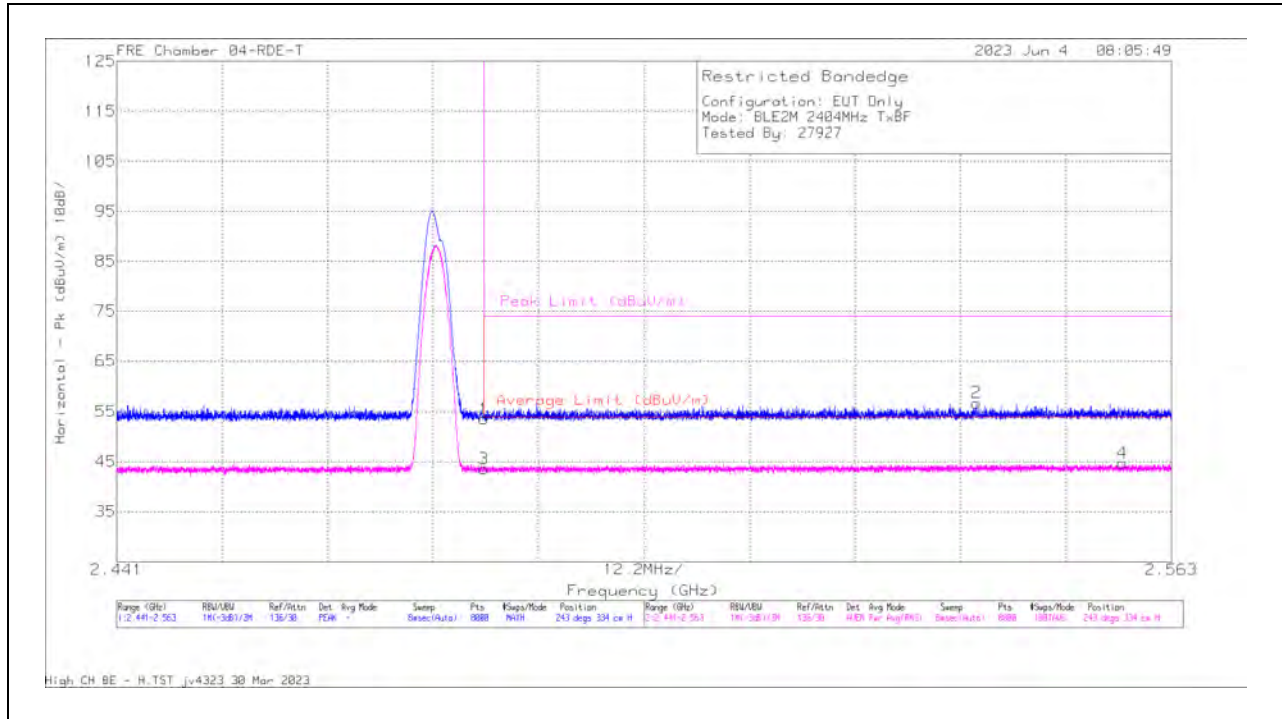


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	59.26	Pk	32.2	-37.81	53.65	-	-	74	-20.35	243	334	H
2	2.540428	62.24	Pk	32.3	-37.75	56.79	-	-	74	-17.21	243	334	H
3	* 2.4835	49.18	RMS	32.2	-37.81	43.57	54	-10.43	-	-	243	334	H
4	2.557342	50.18	RMS	32.3	-37.78	44.7	54	-9.3	-	-	243	334	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

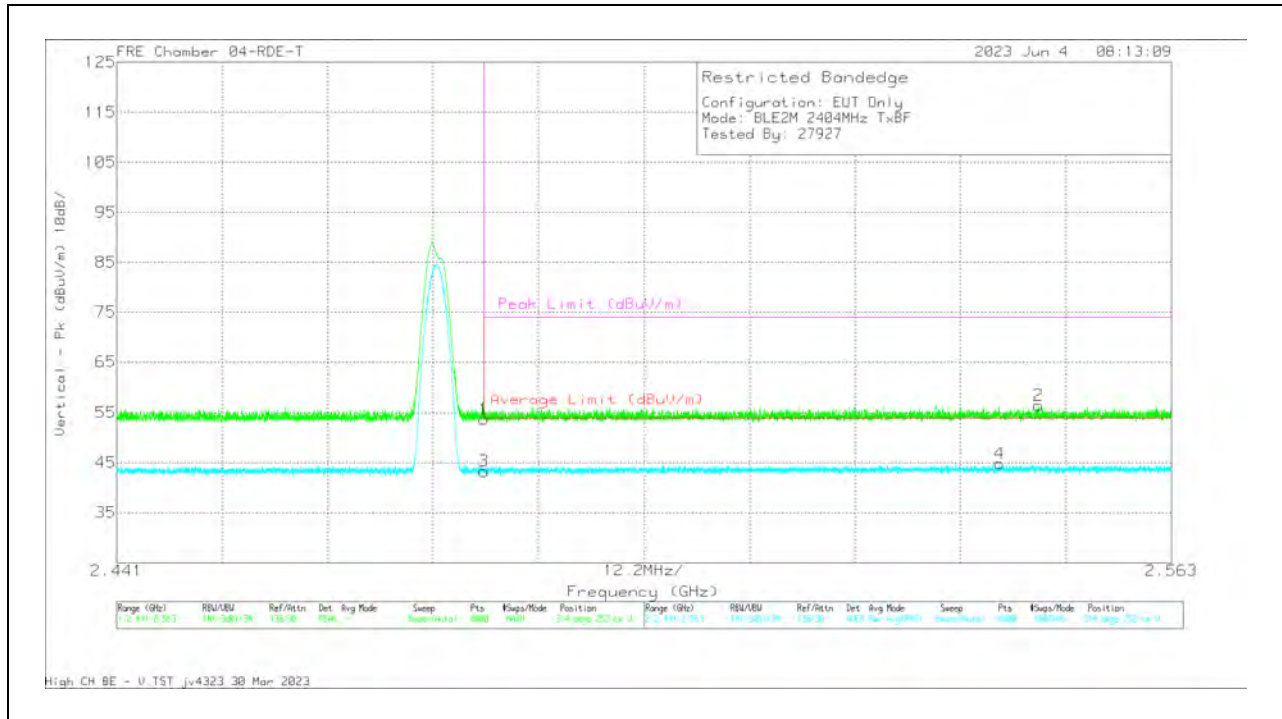


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	59.38	Pk	32.2	-37.81	53.77	-	-	74	-20.23	314	252	V
2	2.547627	61.89	Pk	32.3	-37.74	56.45	-	-	74	-17.55	314	252	V
3	* 2.4835	48.89	RMS	32.2	-37.81	43.28	54	-10.72	-	-	314	252	V
4	2.543112	50.35	RMS	32.3	-37.78	44.87	54	-9.13	-	-	314	252	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.3. WORST CASE BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

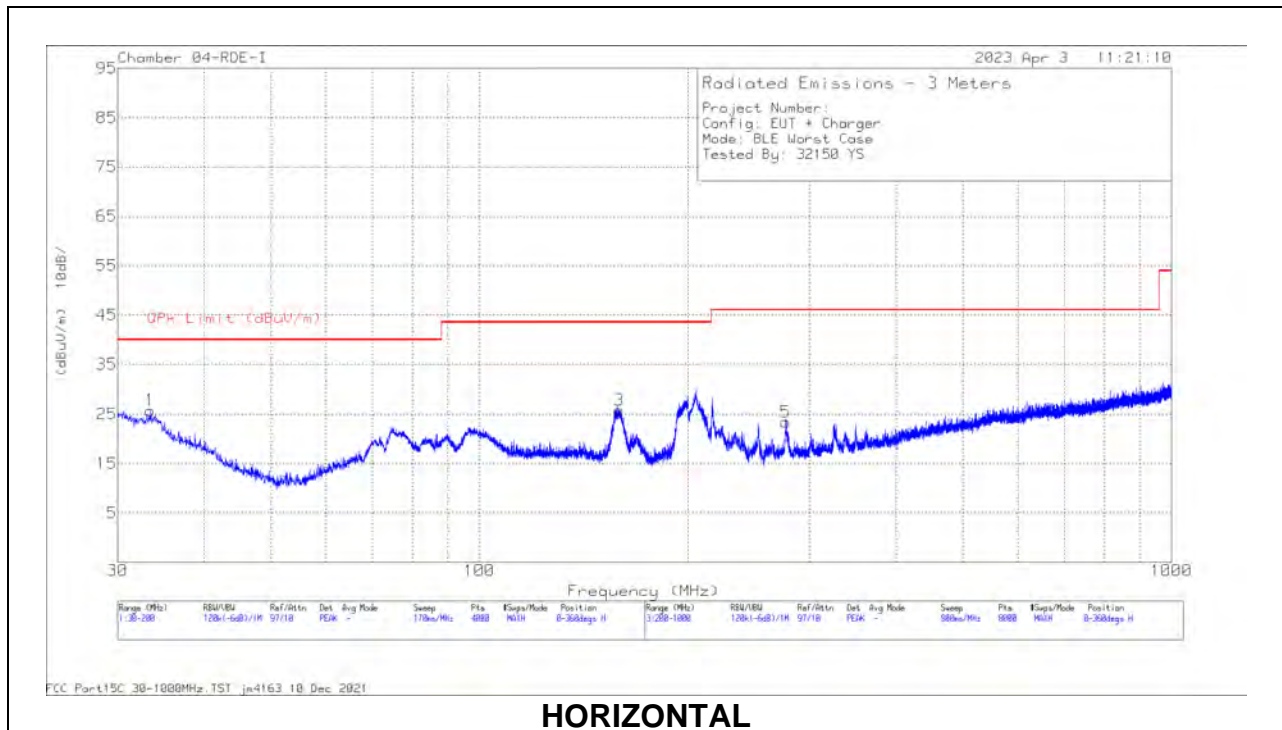

HORIZONTAL

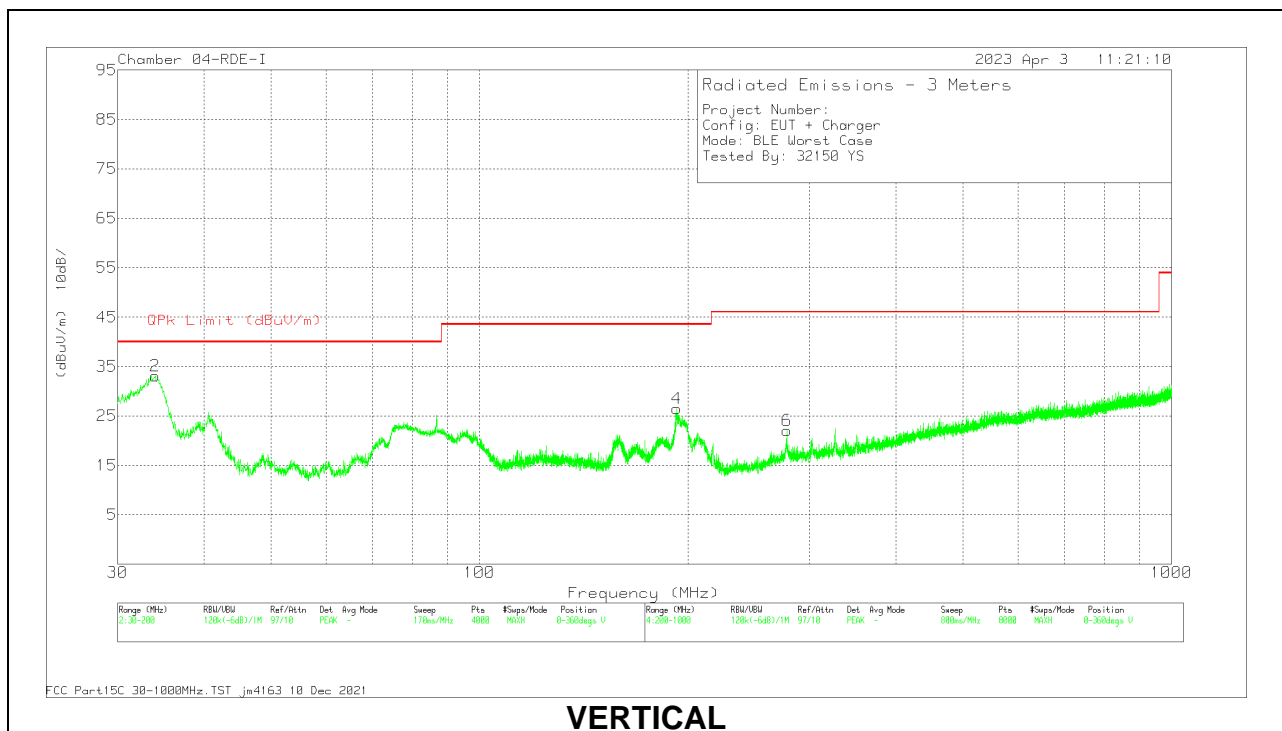

VERTICAL

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80714 ACF (dB) - 10mH	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	OPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	33.4434	31.69	Pk	25.3	-31.2	25.79	40	-14.21	0-360	198	H
2	33.9535	39.26	Pk	24.9	-31.1	33.06	40	-6.94	0-360	101	V
	34.0743	35.62	Qp	24.8	-31.1	29.32	40	-10.68	70	101	V
3	159.021	38.11	Pk	18	-30.2	25.91	43.52	-17.61	0-360	198	H
4	192.817	38.9	Pk	17.7	-30.1	26.5	43.52	-17.02	0-360	101	V
5	* 277.01	34.14	Pk	19	-29.7	23.44	46.02	-22.58	0-360	101	H
6	* 278.11	32.66	Pk	19	-29.6	22.06	46.02	-23.96	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK—Peak Detector

Qp - Quasi-Peak detector


10.4. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

HORIZONTAL

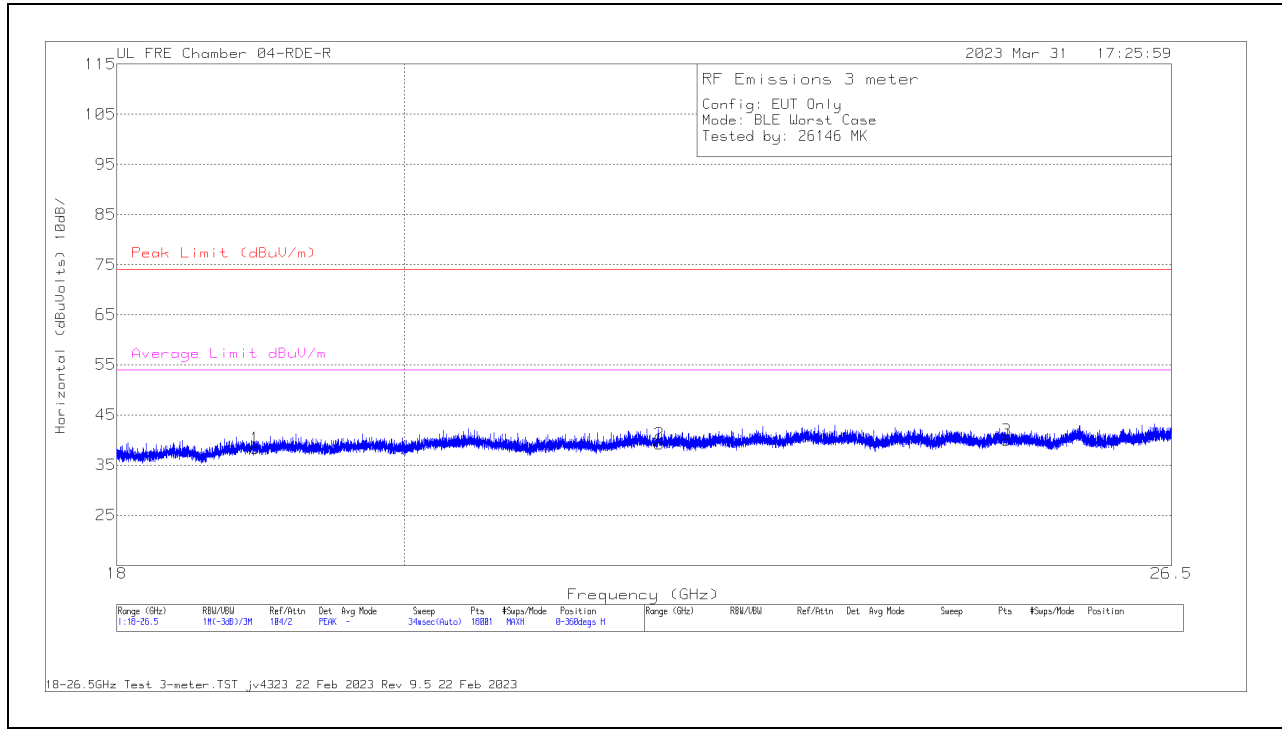

VERTICAL

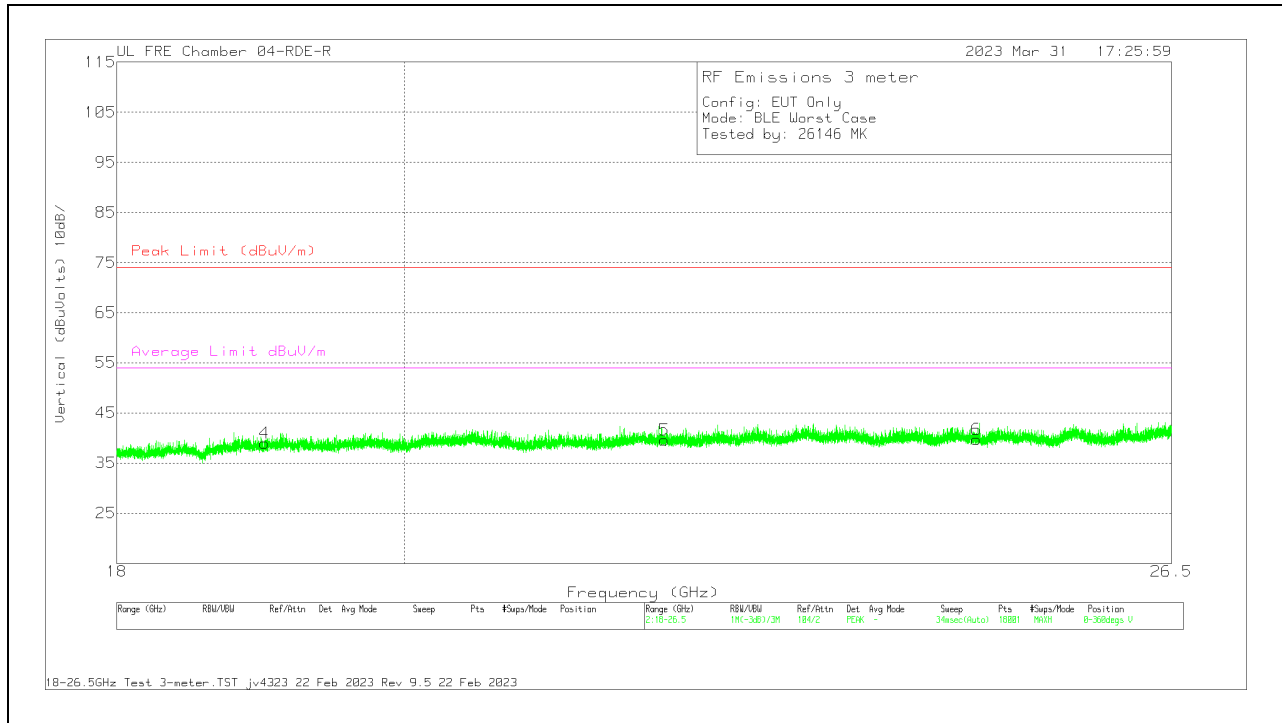

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172353 ACF (dB) - 3mH	171583 Amp Assembly (dB)	Cables (dB)	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit dBuV/m	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 18.937361	55.69	Pk	32.9	-65.7	15.4	38.29	74	-35.71	54	-15.71	0-360	100	H
2	21.963359	54.24	Pk	33.7	-65.3	16.6	39.24	74	-34.76	54	-14.76	0-360	100	H
3	24.945441	52.12	Pk	34.6	-64.4	17.7	40.02	74	-33.98	54	-13.98	0-360	100	H
4	* 19.003	56.42	Pk	32.9	-65.8	15.5	39.02	74	-34.98	54	-14.98	0-360	99	V
5	22.00397	54.73	Pk	33.7	-65.4	16.6	39.63	74	-34.37	54	-14.37	0-360	99	V
6	24.672025	52.15	Pk	34.4	-64.4	17.6	39.75	74	-34.25	54	-14.25	0-360	99	V

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


11.1. AC Power Line WITH AC/DC ADAPTER

LINE 1 RESULTS

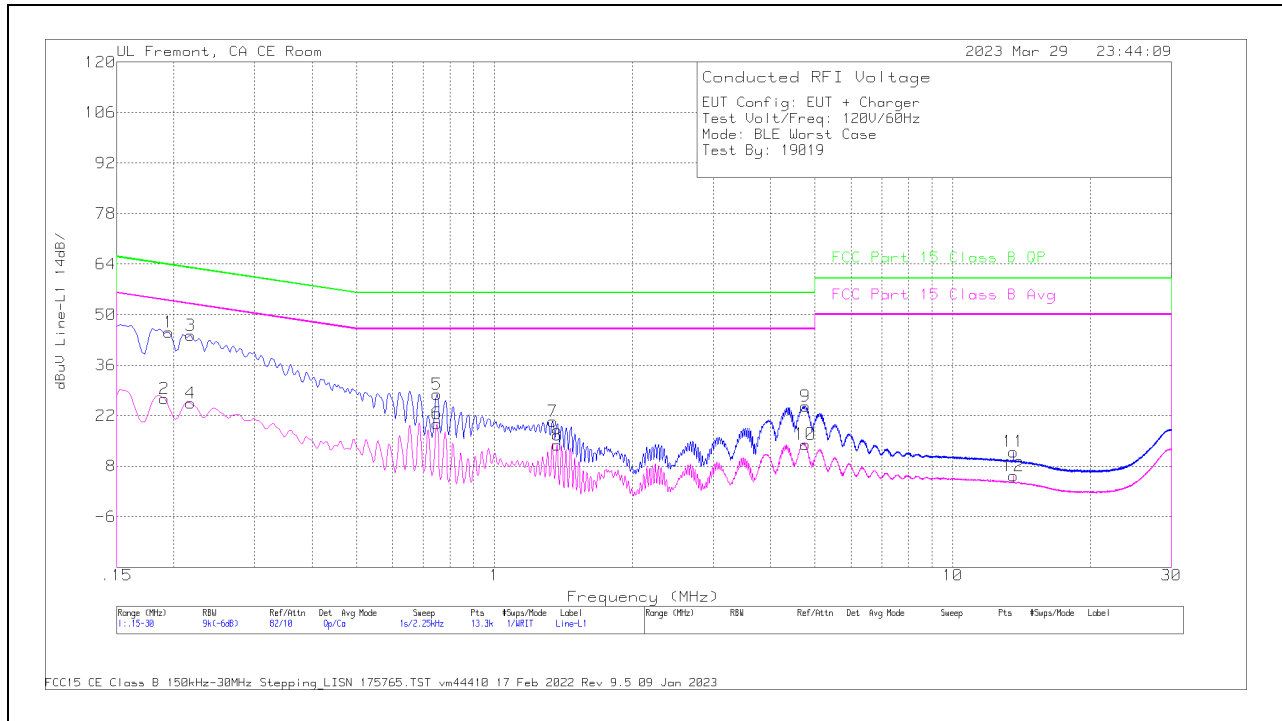

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	L1_LISN.cs v dB	C1&C3 cable path loss dB	207996 Limiter with short cabl dB	Corrected Reading dBuV	FCC Part 15 Class B QP dBuV	QP Margin (dB)	FCC Part 15 Class B Avg dBuV	Av(CISPR) Margin (dB)
2	.1905	17.26	Ca	0	0	9.4	26.66	-	-	54.01	-27.35
4	.2175	16.18	Ca	0	0	9.3	25.48	-	-	52.91	-27.43
6	.7485	10.44	Ca	0	.1	9.3	19.84	-	-	46	-26.16
8	1.3695	4.44	Ca	0	.1	9.3	13.84	-	-	46	-32.16
10	4.7648	4.7	Ca	0	.1	9.3	14.1	-	-	46	-31.9
12	13.56	-4.25	Ca	.1	.2	9.3	5.35	-	-	50	-44.65
1	.195	35.73	Qp	0	0	9.4	45.13	63.82	-18.69	-	-
3	.2175	34.91	Qp	0	0	9.3	44.21	62.91	-18.7	-	-
5	.7485	18.5	Qp	0	.1	9.3	27.9	56	-28.1	-	-
7	1.3403	11.03	Qp	0	.1	9.3	20.43	56	-35.57	-	-
9	4.7648	15.15	Qp	0	.1	9.3	24.55	56	-31.45	-	-
11	13.56	2.42	Qp	.1	.2	9.3	12.02	60	-47.98	-	-


LINE 2 RESULTS

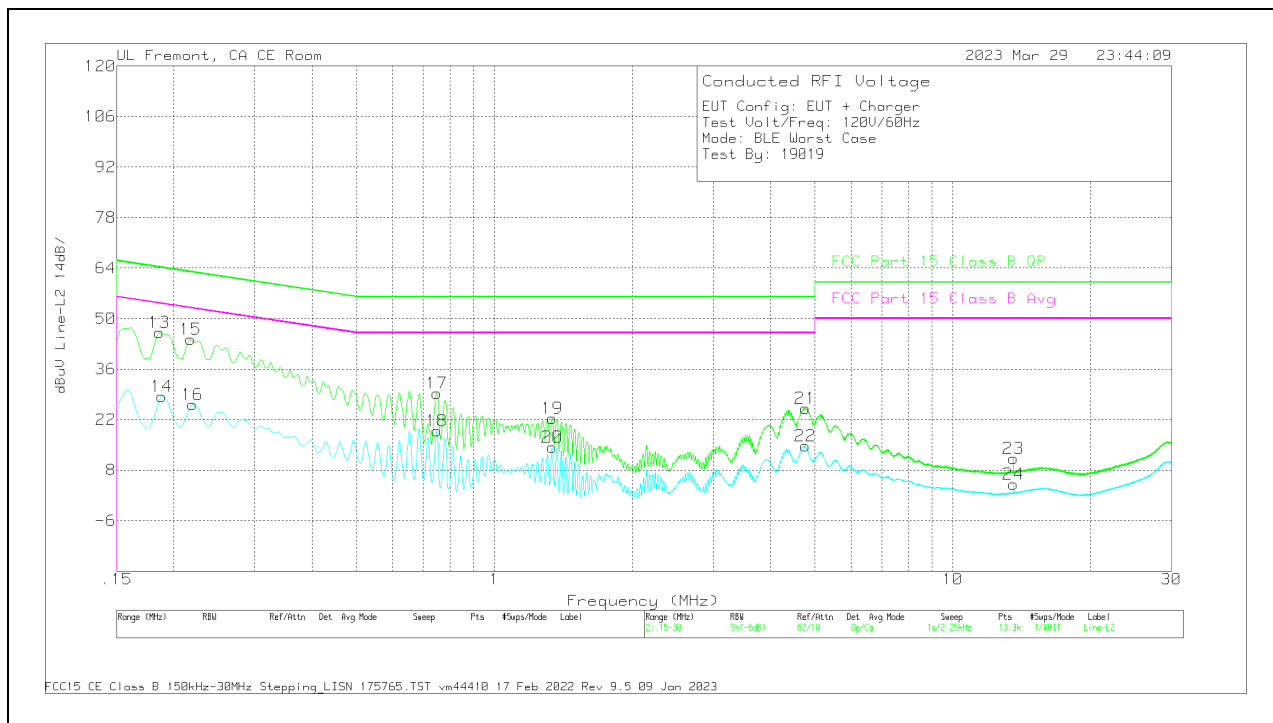

Qp - Quasi-Peak detector
 Ca - CISPR average detection


11.2. AC Power Line With Laptop

LINE 1 RESULTS

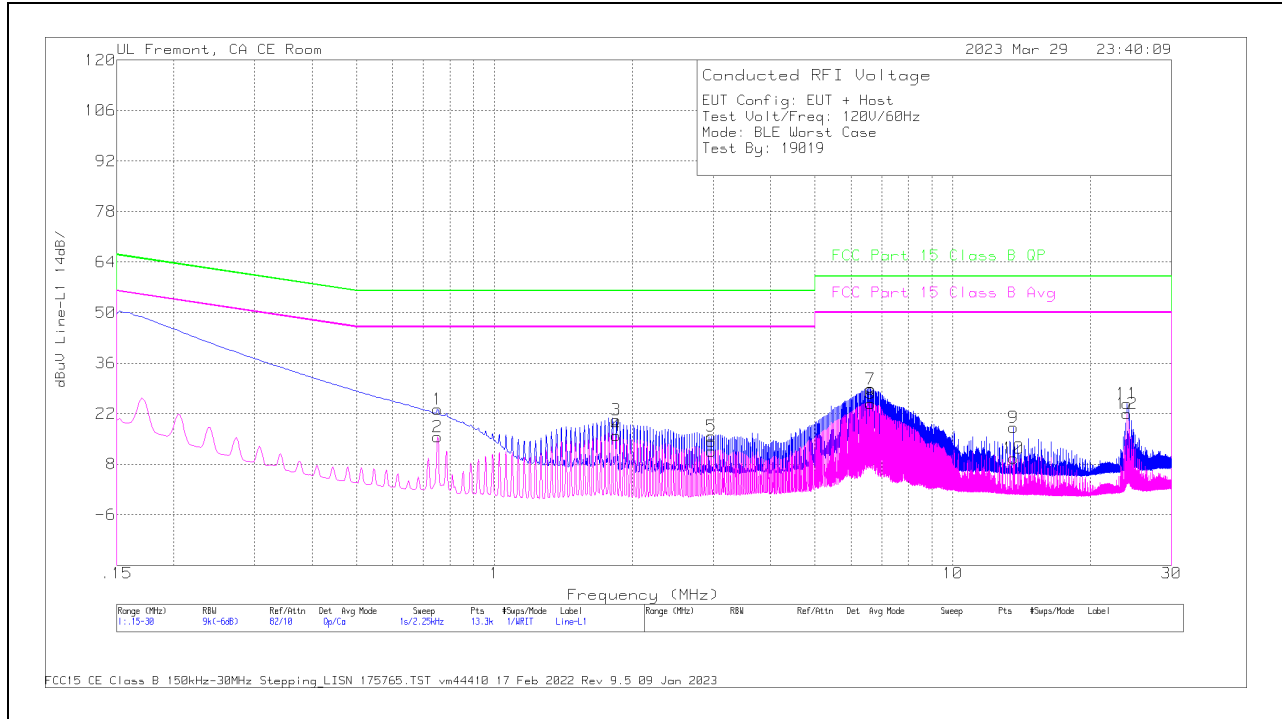

Range 1: Line-L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	L1_LISN.csv dB	C1&C3 cable path loss dB	207996 Limiter with short cabl dB	Corrected Reading dBuV	FCC Part 15 Class B QP dBuV	QP Margin (dB)	FCC Part 15 Class B Avg dBuV	Av(CISPR) Margin (dB)	
2	.7508	6.12	Ca	0	.1	9.3	15.52	-	-	46	-30.48	
4	1.8443	6.55	Ca	0	.1	9.3	15.95	-	-	46	-30.05	
6	2.9715	2.22	Ca	0	.1	9.3	11.62	-	-	46	-34.38	
8	6.6255	15.4	Ca	0	.1	9.3	24.8	-	-	50	-25.2	
10	13.56	.11	Ca	.1	.2	9.3	9.71	-	-	50	-40.29	
12	24	12.1	Ca	.2	.3	9.4	22	-	-	50	-28	
1	.7508	13.81	Qp	0	.1	9.3	23.21	56	-32.79	-	-	
3	1.8443	10.85	Qp	0	.1	9.3	20.25	56	-35.75	-	-	
5	2.9715	6.42	Qp	0	.1	9.3	15.82	56	-40.18	-	-	
7	6.6255	19.34	Qp	0	.1	9.3	28.74	60	-31.26	-	-	
9	13.56	8.55	Qp	.1	.2	9.3	18.15	60	-41.85	-	-	
11	24	14.91	Qp	.2	.3	9.4	24.81	60	-35.19	-	-	

LINE 2 RESULTS

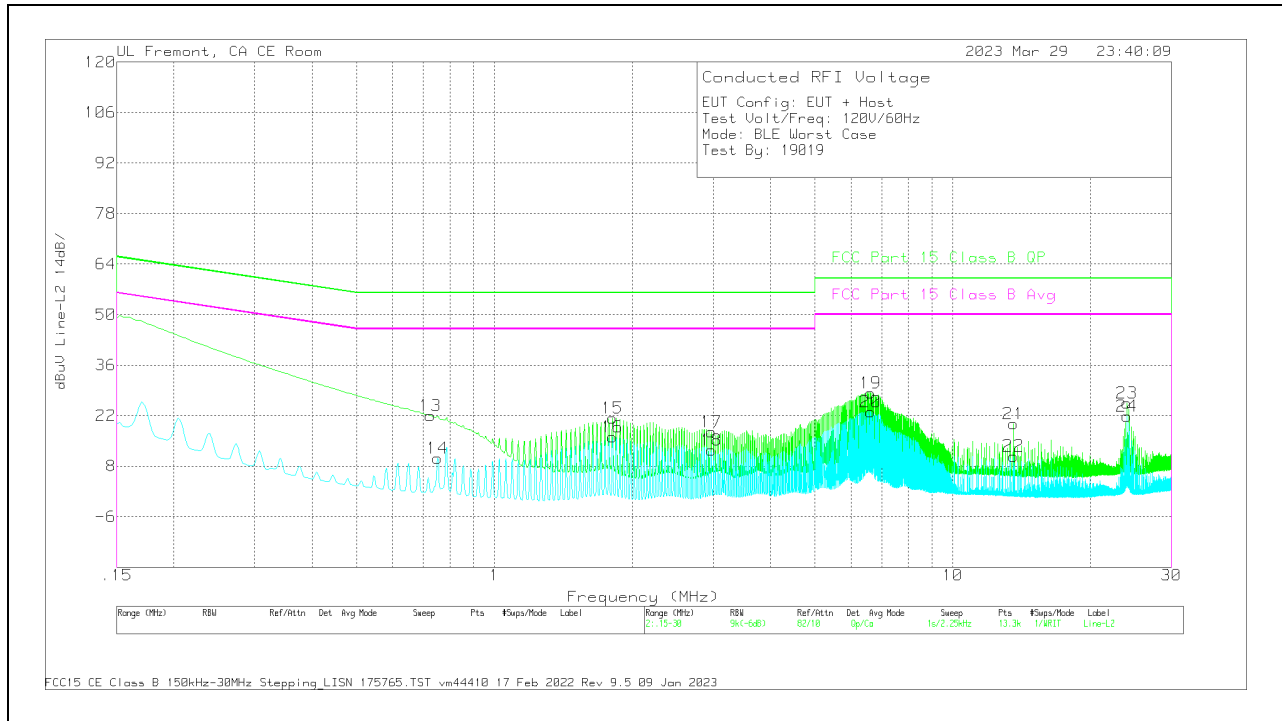

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	L2_LISN dB	C2&C3 cable path loss dB	207996 Limiter with short cabl dB	Corrected Reading dBuV	FCC Part 15 Class B QP dBuV	QP Margin (dB)	FCC Part 15 Class B Avg dBuV	Av(CISPR) Margin (dB)
14	.7508	.86	Ca	0	.1	9.3	10.26	-	-	46	-35.74
16	1.8105	6.69	Ca	0	.1	9.3	16.09	-	-	46	-29.91
18	2.9715	3.05	Ca	0	.1	9.3	12.45	-	-	46	-33.55
20	6.6255	13.6	Ca	0	.1	9.3	23	-	-	50	-27
22	13.56	1.2	Ca	.1	.2	9.3	10.8	-	-	50	-39.2
24	24	11.98	Ca	.2	.3	9.4	21.88	-	-	50	-28.12
13	.7249	12.58	Qp	0	.1	9.3	21.98	56	-34.02	-	-
15	1.8105	11.99	Qp	0	.1	9.3	21.39	56	-34.61	-	-
17	2.9715	8.13	Qp	0	.1	9.3	17.53	56	-38.47	-	-
19	6.6255	18.83	Qp	0	.1	9.3	28.23	60	-31.77	-	-
21	13.56	10.1	Qp	.1	.2	9.3	19.7	60	-40.3	-	-
23	24	15.52	Qp	.2	.3	9.4	25.42	60	-34.58	-	-

Qp - Quasi-Peak detector
 Ca - CISPR average detection

12. SETUP PHOTOS

Please refer to setup photos 14523744-EP1V1

END OF TEST REPORT