

VERTICAL RESULT




Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF(dB) - 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6478	-47.11	Pk	34.5	11.8	0	-37.15	-37.96	-27	-10.96	145	113	V
1	5.725	-26.15	Pk	34.5	11.8	0	-37.07	-16.92	27	-43.92	145	113	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

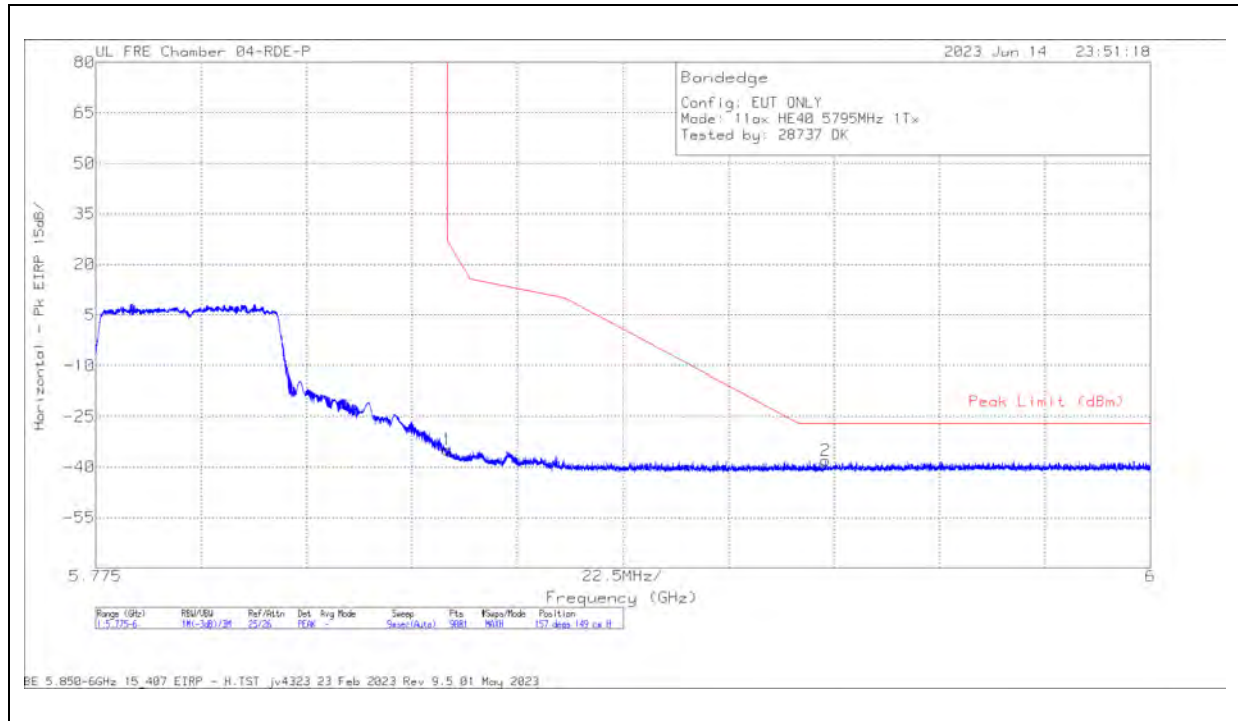

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF(dB) - 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.78	Pk	34.7	11.8	0	-36.6	-34.88	27	-61.88	157	149	H
2	5.930725	-48.33	Pk	34.9	11.8	0	-36.35	-37.98	-27	-10.98	157	149	H

Pk - Peak detector

VERTICAL RESULT




Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF(dB) - 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-43.92	Pk	34.7	11.8	0	-36.6	-34.02	27	-61.02	161	153	V
2	5.978325	-48.34	Pk	35	11.8	0	-36.06	-37.6	-27	-10.6	161	153	V

Pk - Peak detector

1TX Antenna 5 MODE: 26-Tone, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

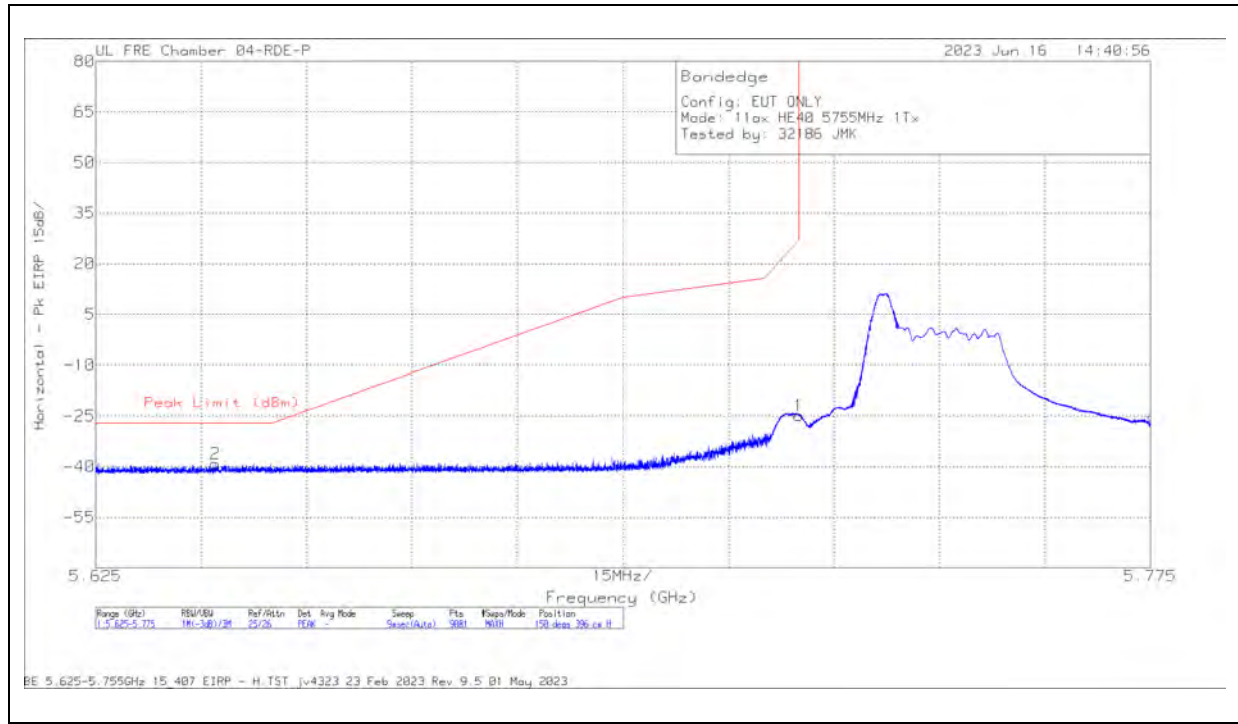

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF(dB) - 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.642034	-48.06	Pk	34.5	11.8	0	-37.34	-39.1	-27	-12.1	150	396	H
1	5.725	-34	Pk	34.5	11.8	0	-37.07	-24.77	27	-51.77	150	396	H

Pk - Peak detector

VERTICAL RESULT

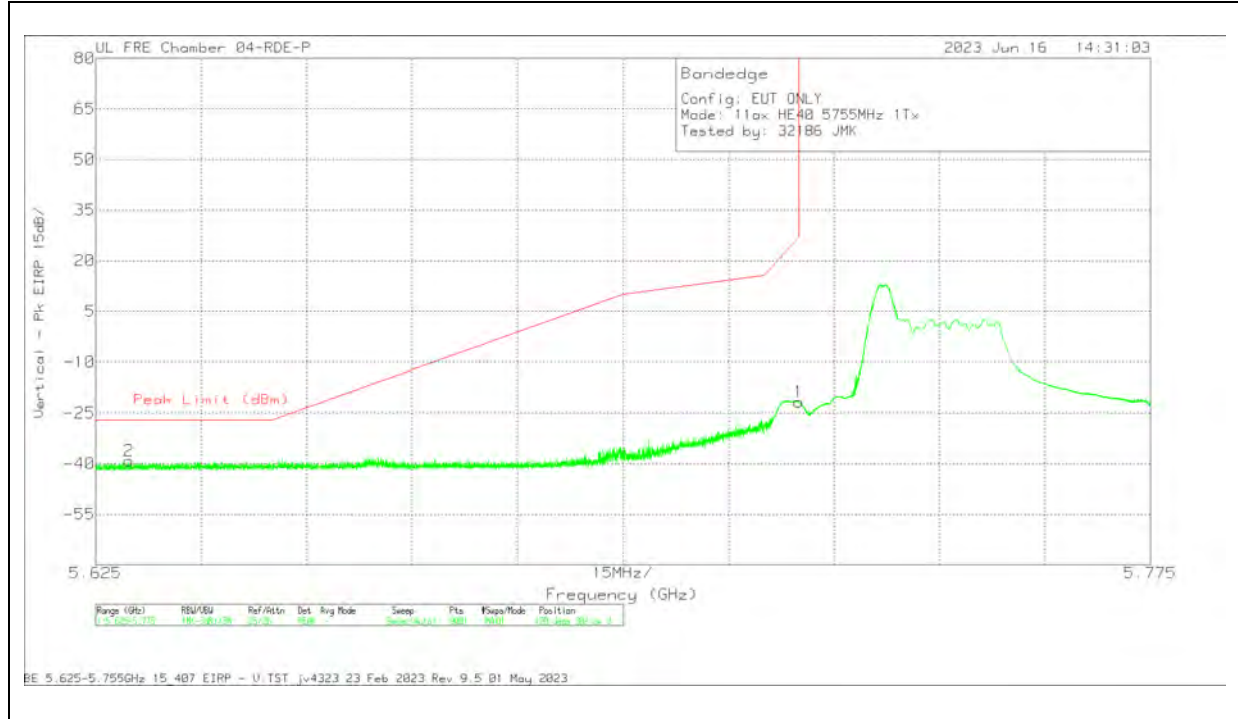


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF(dB) - 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.629717	-48.03	Pk	34.4	11.8	0	-37.35	-39.18	-27	-12.18	120	302	V
1	5.725	-30.87	Pk	34.5	11.8	0	-37.07	-21.64	27	-48.64	120	302	V

Pk - Peak detector

1TX Antenna 5 MODE: 26-Tone, RU Index 17

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

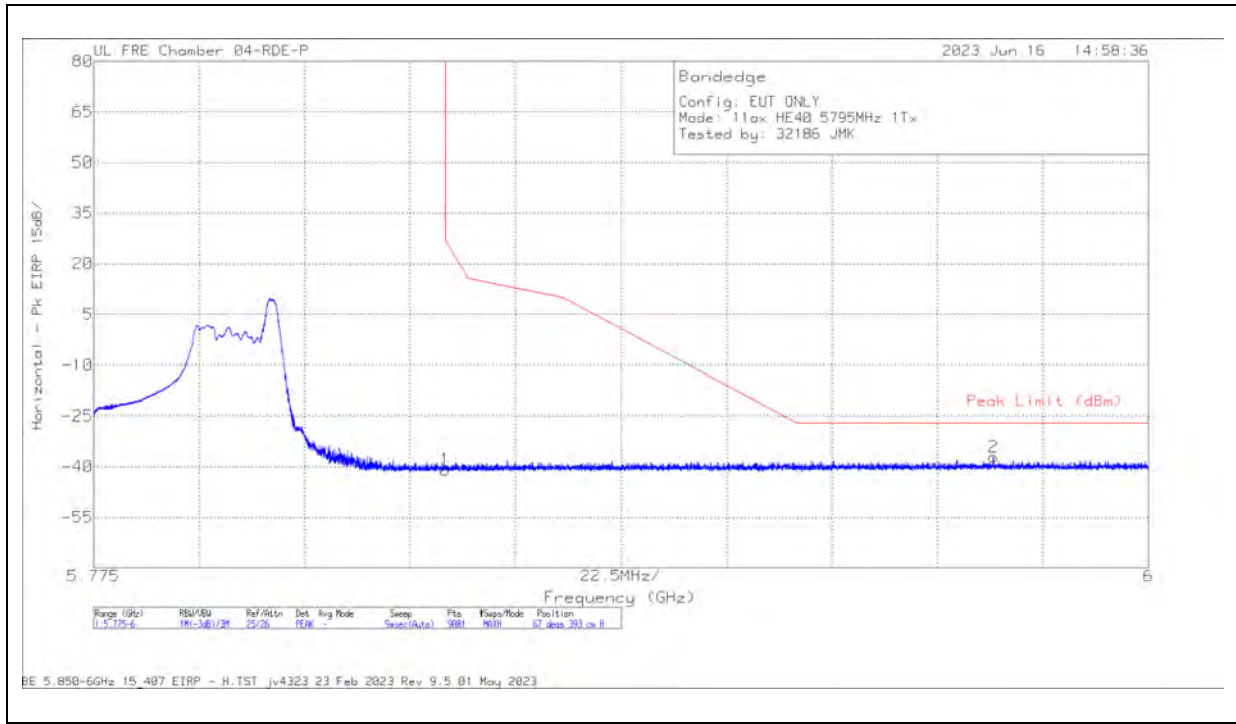

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF(dB) - 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-50.78	Pk	34.7	11.8	0	-36.6	-40.88	27	-67.88	67	393	H
2	5.966925	-47.93	Pk	35	11.8	0	-36.02	-37.15	-27	-10.15	67	393	H

Pk - Peak detector

VERTICAL RESULT

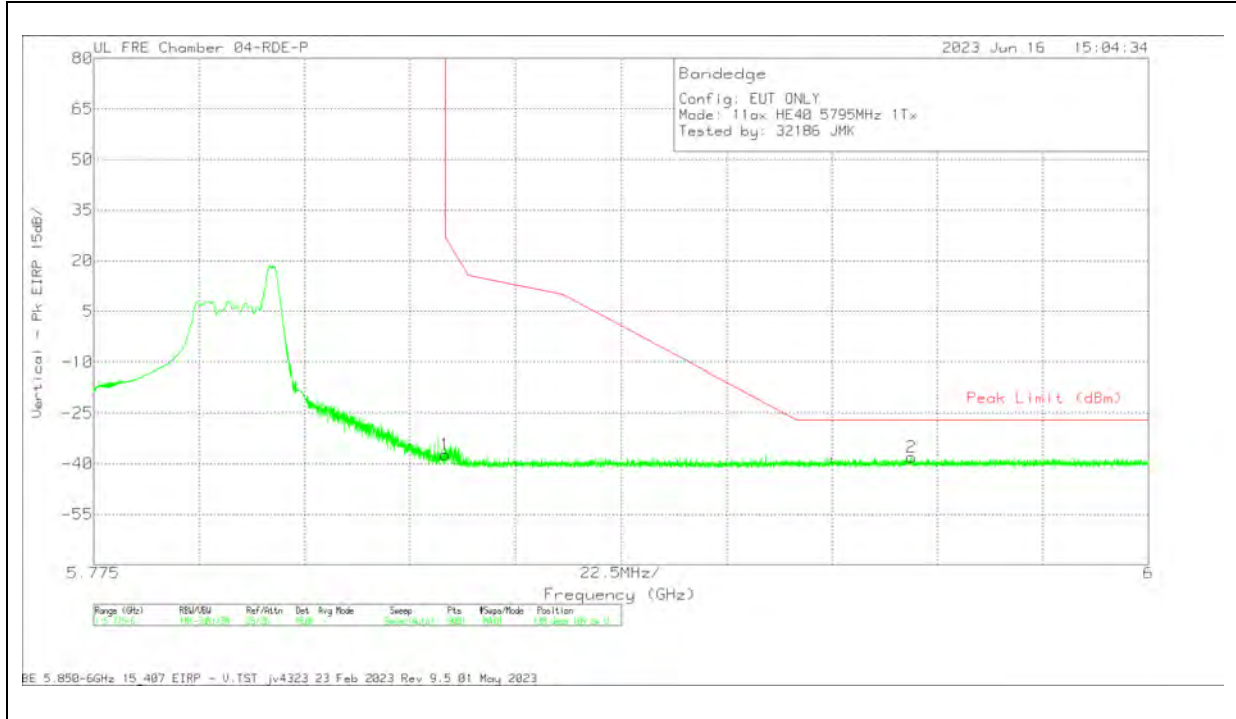


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF(dB) - 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-47.18	Pk	34.7	11.8	0	-36.6	-37.28	27	-64.28	138	109	V
2	5.949475	-48.42	Pk	34.9	11.8	0	-36.22	-37.94	-27	-10.94	138	109	V

Pk - Peak detector

1TX Antenna 5 MODE: SU, Single User

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

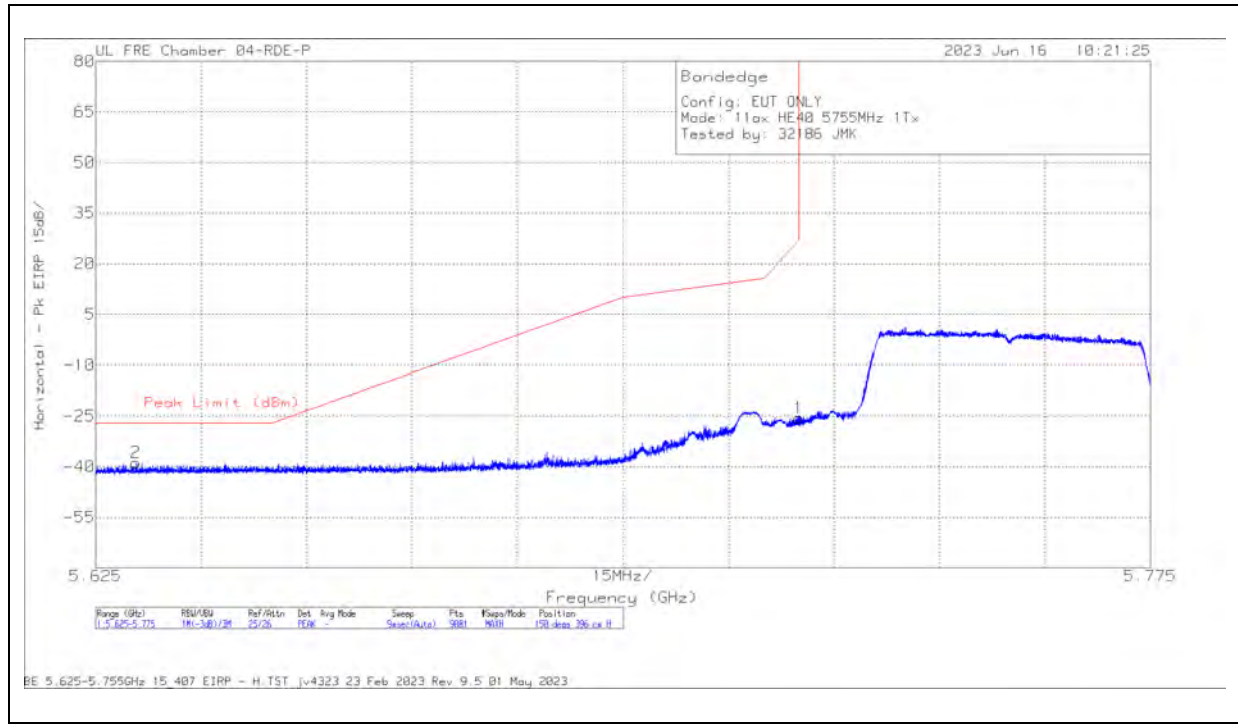

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF(dB) - 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.630683	-47.63	Pk	34.4	11.8	0	-37.31	-38.74	-27	-11.74	150	396	H
1	5.725	-34.76	Pk	34.5	11.8	0	-37.07	-25.53	27	-52.53	150	396	H

Pk - Peak detector

VERTICAL RESULT

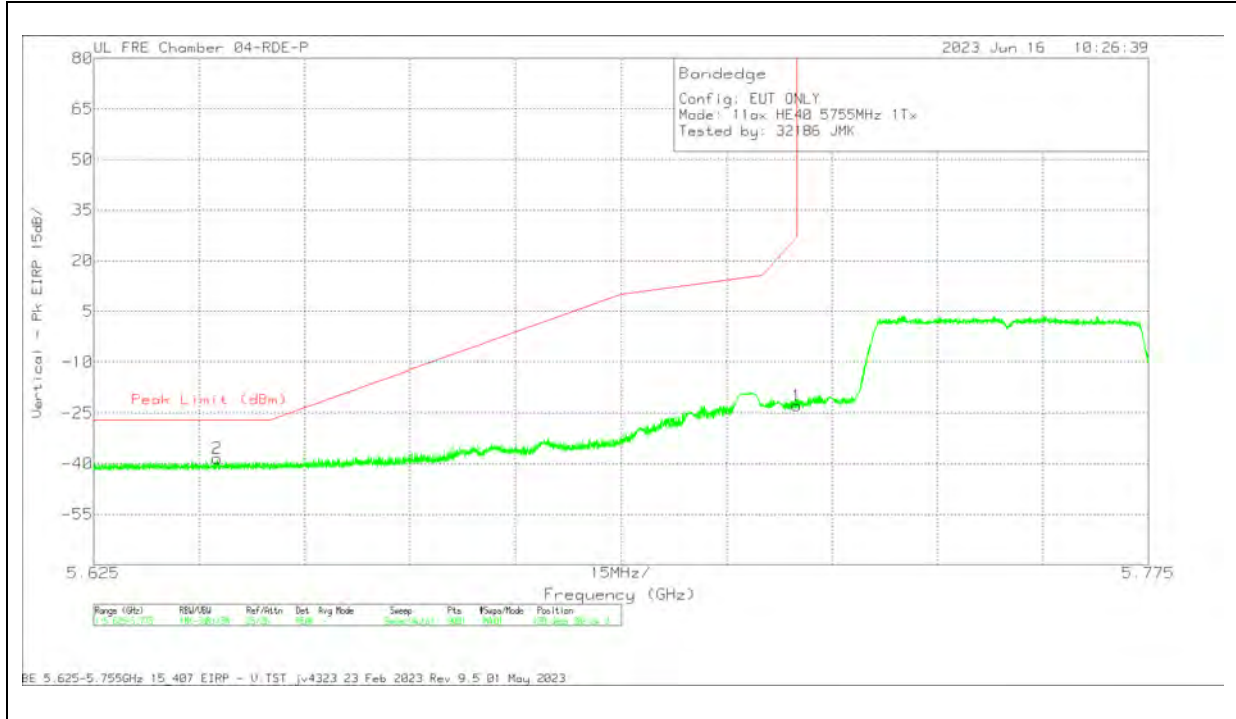


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF(dB) - 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.642534	-47.37	Pk	34.5	11.8	0	-37.31	-38.38	-27	-11.38	120	302	V
1	5.725	-32.01	Pk	34.5	11.8	0	-37.07	-22.78	27	-49.78	120	302	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

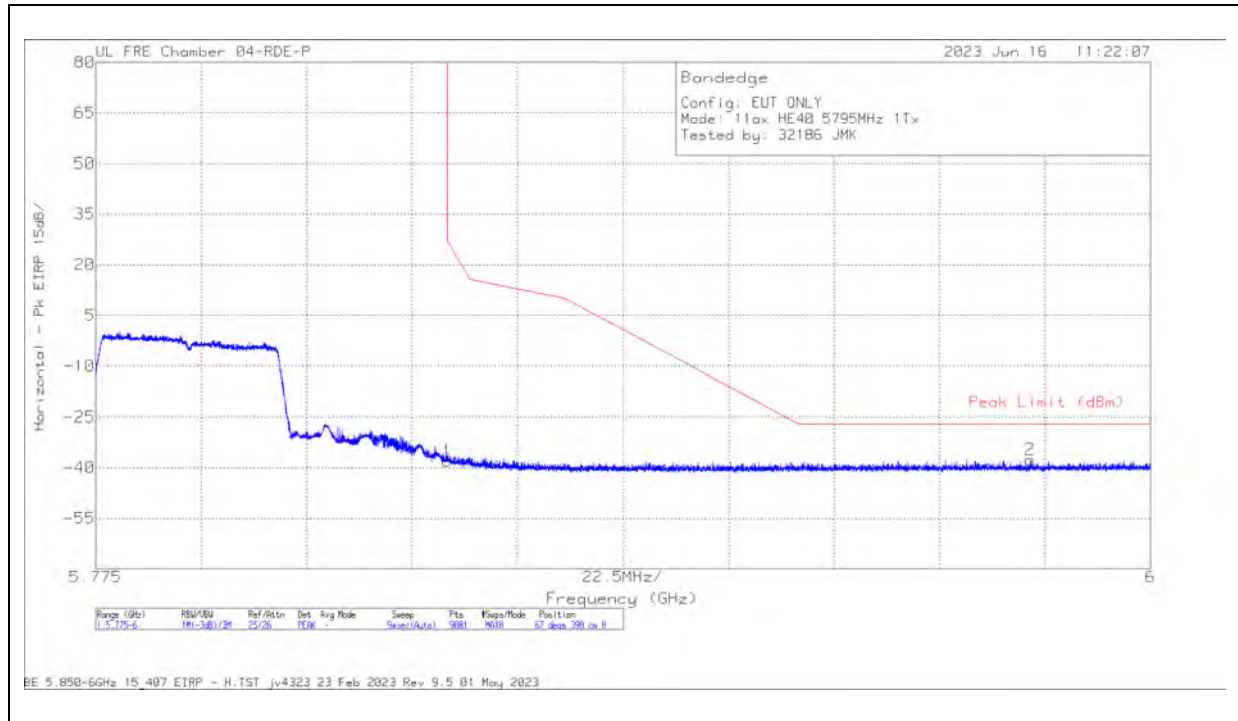

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF(dB) - 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-47.89	Pk	34.7	11.8	0	-36.6	-37.99	27	-64.99	67	398	H
2	5.9743	-48.15	Pk	35	11.8	0	-36.19	-37.54	-27	-10.54	67	398	H

Pk - Peak detector

VERTICAL RESULT




Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222740 ACF(dB) - 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.69	Pk	34.7	11.8	0	-36.6	-34.79	27	-61.79	138	109	V
2	5.95955	-47.96	Pk	34.9	11.8	0	-36.22	-37.48	-27	-10.48	138	109	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: 26-Tone, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

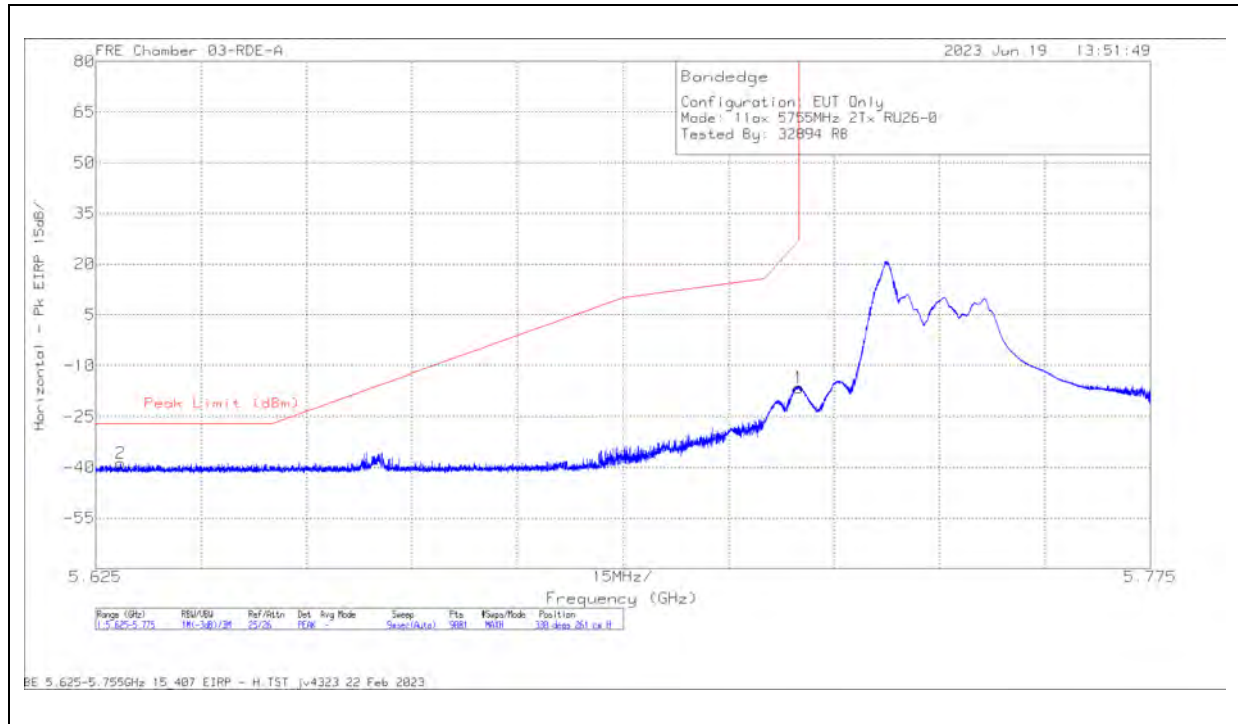

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.628567	-47.6	Pk	35.1	11.8	-37.97	-38.67	-27	-11.67	330	261	H
1	5.725	-25.74	Pk	35.2	11.8	-37.78	-16.52	27	-43.52	330	261	H

Pk - Peak detector

VERTICAL RESULT




Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.644117	-47.26	Pk	35.2	11.8	0	-37.93	-38.19	-27	-11.19	293	108	V
1	5.725	-28.67	Pk	35.2	11.8	0	-37.78	-19.45	27	-46.45	293	108	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

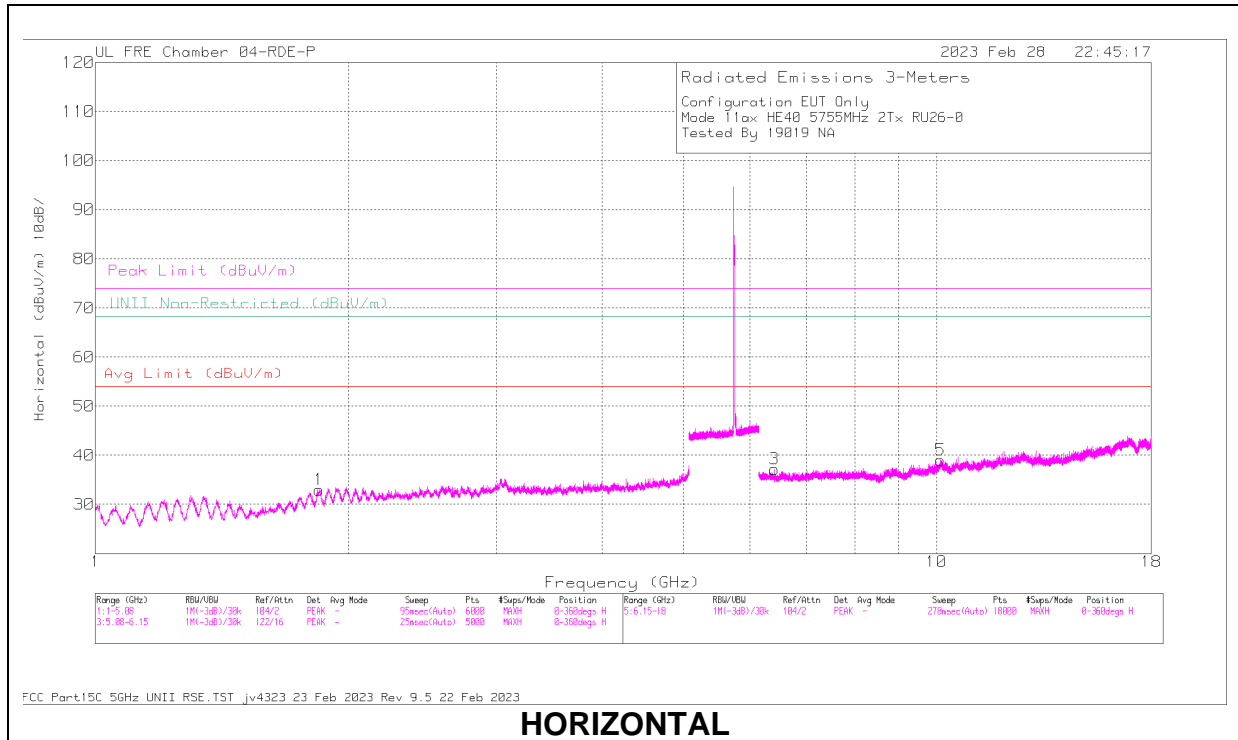

HORIZONTAL

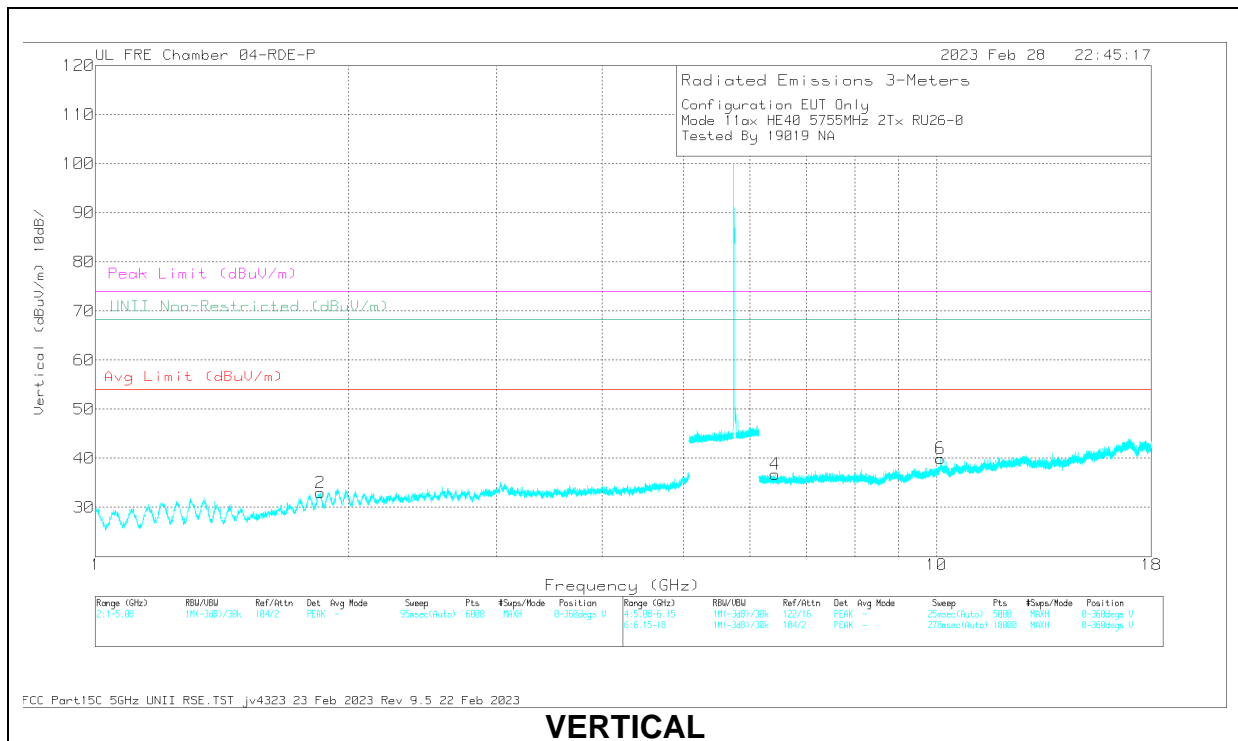



VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF(dB) - 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.846644	61.57	PK-U	31	-49.12	43.45	68.2	-24.75	233	226	H
2	1.849018	61.03	PK-U	31.1	-49.03	43.1	68.2	-25.1	146	238	V
3	6.416096	55.09	PK-U	35.3	-44.37	46.02	68.2	-22.18	207	169	H
4	6.423953	55.31	PK-U	35.3	-44.44	46.17	68.2	-22.03	134	144	V
6	10.111667	58.03	PK-U	37.1	-46.56	48.57	68.2	-19.63	312	313	V
5	10.114819	58.75	PK-U	37.2	-46.49	49.46	68.2	-18.74	293	258	H

PK-U - U-NII: Maximum Peak

HIGH CHANNEL RESULTS

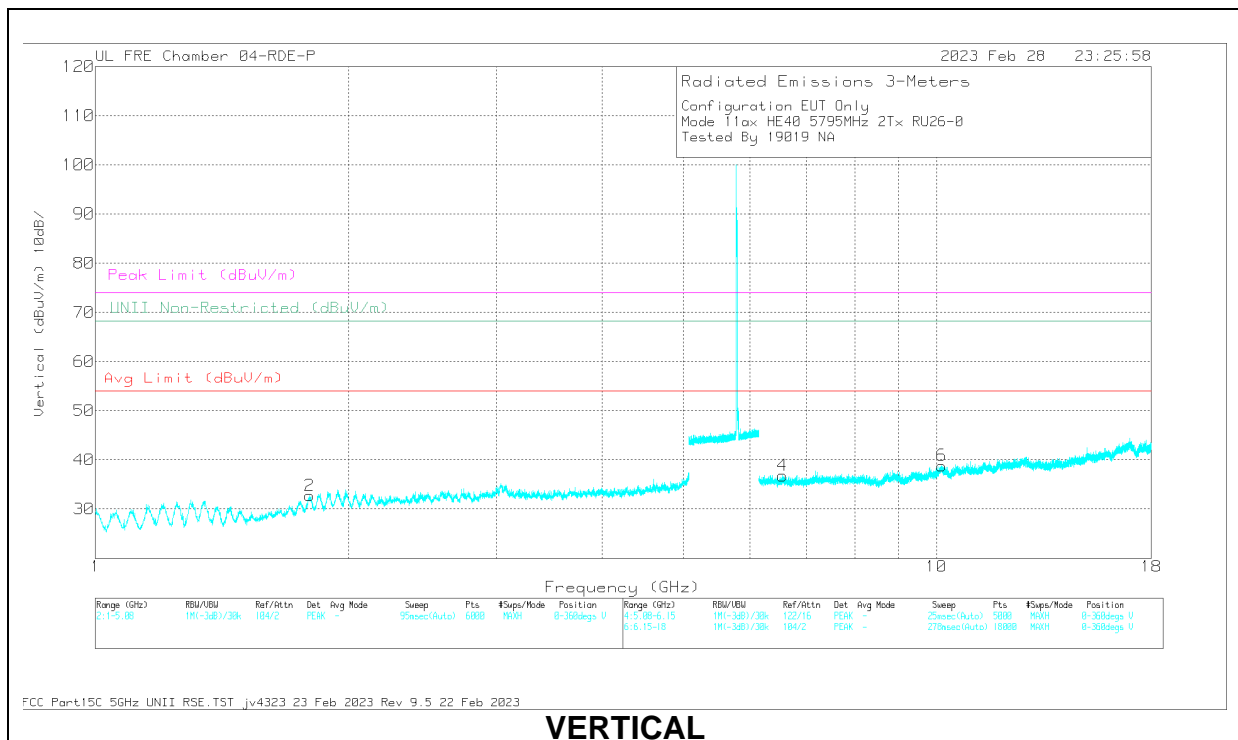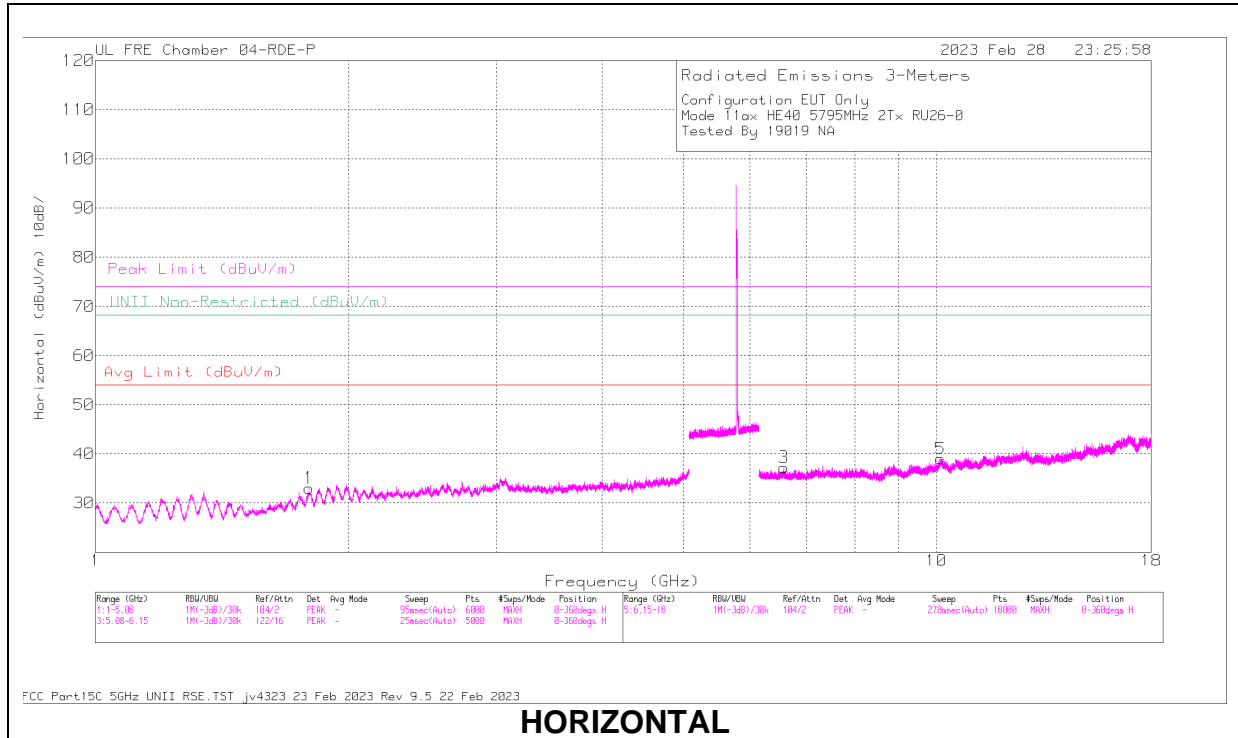

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF(dB) - 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.794436	61.35	PK-U	30.5	-49.17	42.68	68.2	-25.52	149	243	H
2	1.795276	61.4	PK-U	30.5	-49.16	42.74	68.2	-25.46	220	196	V
4	6.563323	55.63	PK-U	35.4	-44.24	46.79	68.2	-21.41	109	280	V
3	6.579891	52.1	PK-U	35.5	-44.28	43.32	68.2	-24.88	173	264	H
5	10.112704	54.81	PK-U	37.1	-46.55	45.36	68.2	-22.84	234	155	H
6	10.143648	55.65	PK-U	37.2	-46.24	46.61	68.2	-21.59	243	135	V

PK-U - U-NII: Maximum Peak

2TX Antenna 6 + Antenna 5 OFDMA MODE: 26-Tone, RU Index 17

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

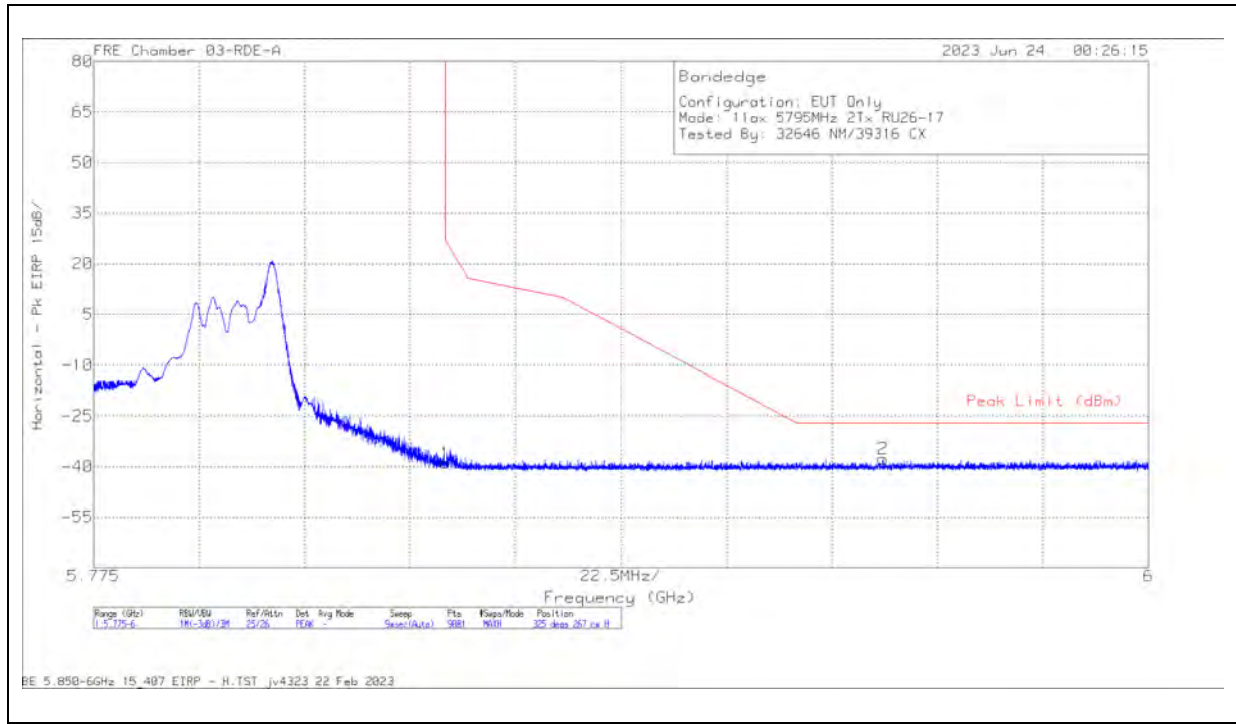

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.4	Pk	35.2	11.8	0	-37.49	-38.89	27	-65.89	325	267	H
2	5.943375	-47.48	Pk	35.3	11.8	0	-37.29	-37.67	-27	-10.67	325	267	H

Pk - Peak detector

VERTICAL RESULT

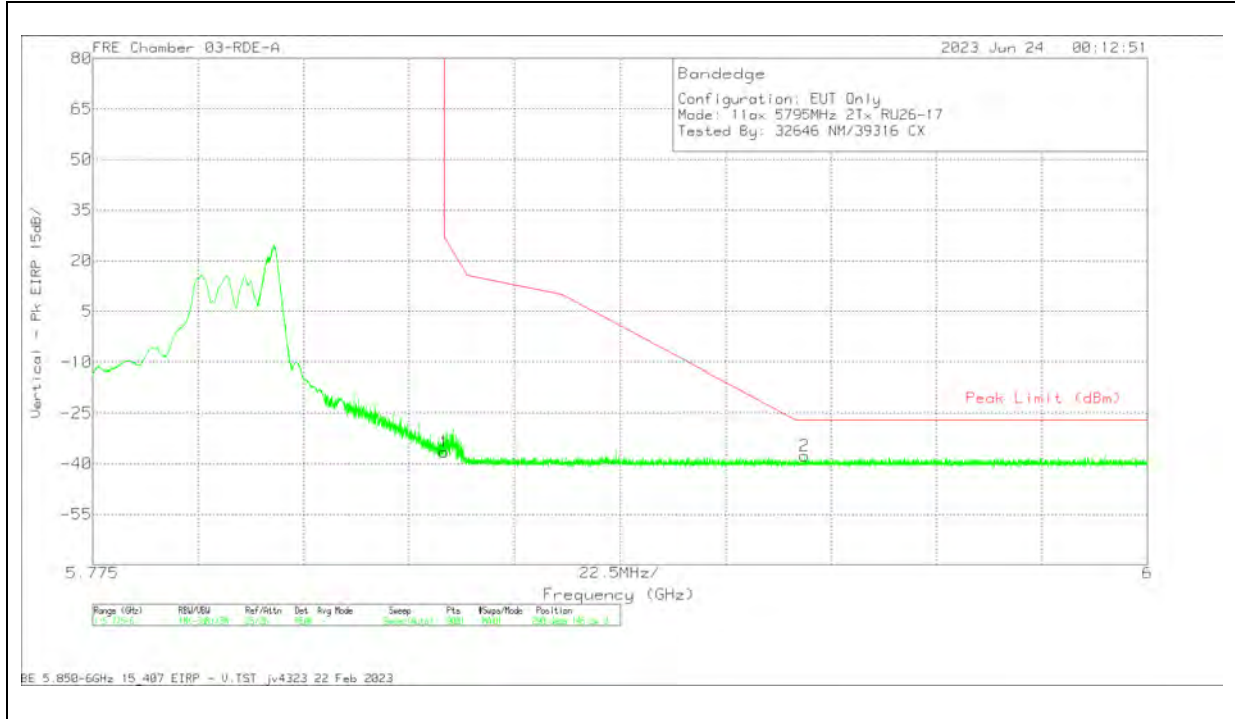


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-45.96	Pk	35.2	11.8	0	-37.49	-36.45	27	-63.45	290	145	V
2	5.9269	-47.35	Pk	35.3	11.8	0	-37.32	-37.57	-27	-10.57	290	145	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: SU, Single User

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

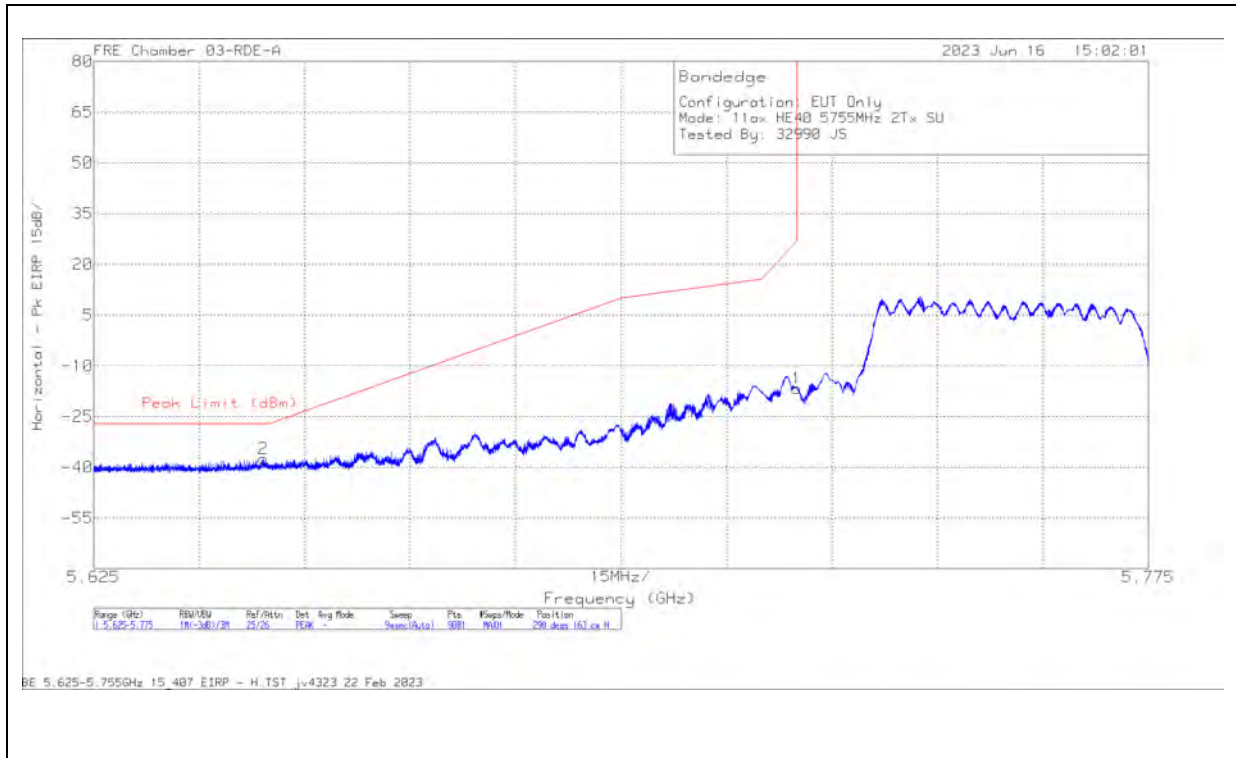

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649117	-46.47	Pk	35.2	11.8	0	-37.94	-37.41	-27	-10.41	298	163	H
1	5.725	-25.83	Pk	35.2	11.8	0	-37.78	-16.61	27	-43.61	298	163	H

Pk - Peak detector

VERTICAL RESULT

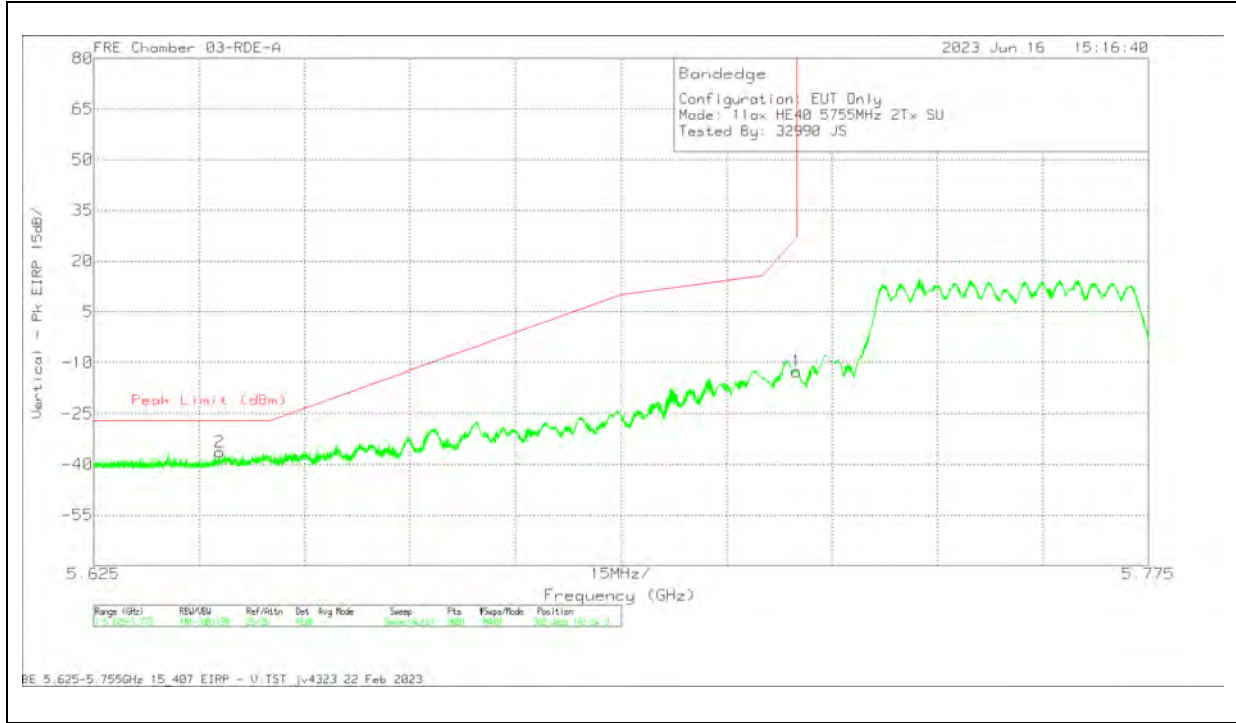


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.642917	-45.44	Pk	35.2	11.8	0	-37.94	-36.38	-27	-9.38	302	143	V
1	5.725	-21.84	Pk	35.2	11.8	0	-37.78	-12.62	27	-39.62	302	143	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

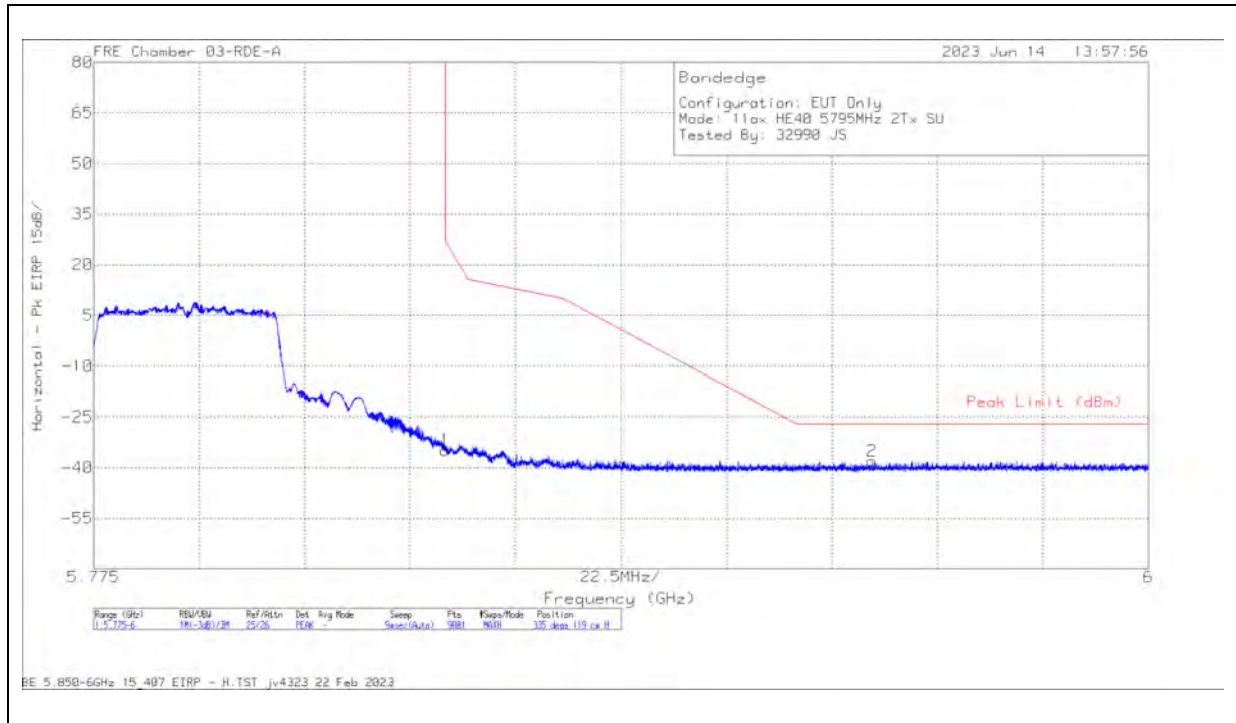

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.31	Pk	35.2	11.8	0	-37.49	-34.8	27	-61.8	335	119	H
2	5.941075	-47.75	Pk	35.3	11.8	0	-37.28	-37.93	-27	-10.93	335	119	H

Pk - Peak detector

VERTICAL RESULT





Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-40.66	Pk	35.2	11.8	0	-37.49	-31.15	27	-58.15	312	147	V
2	5.9739	-47.25	Pk	35.4	11.8	0	-37.24	-37.29	-27	-10.29	312	147	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

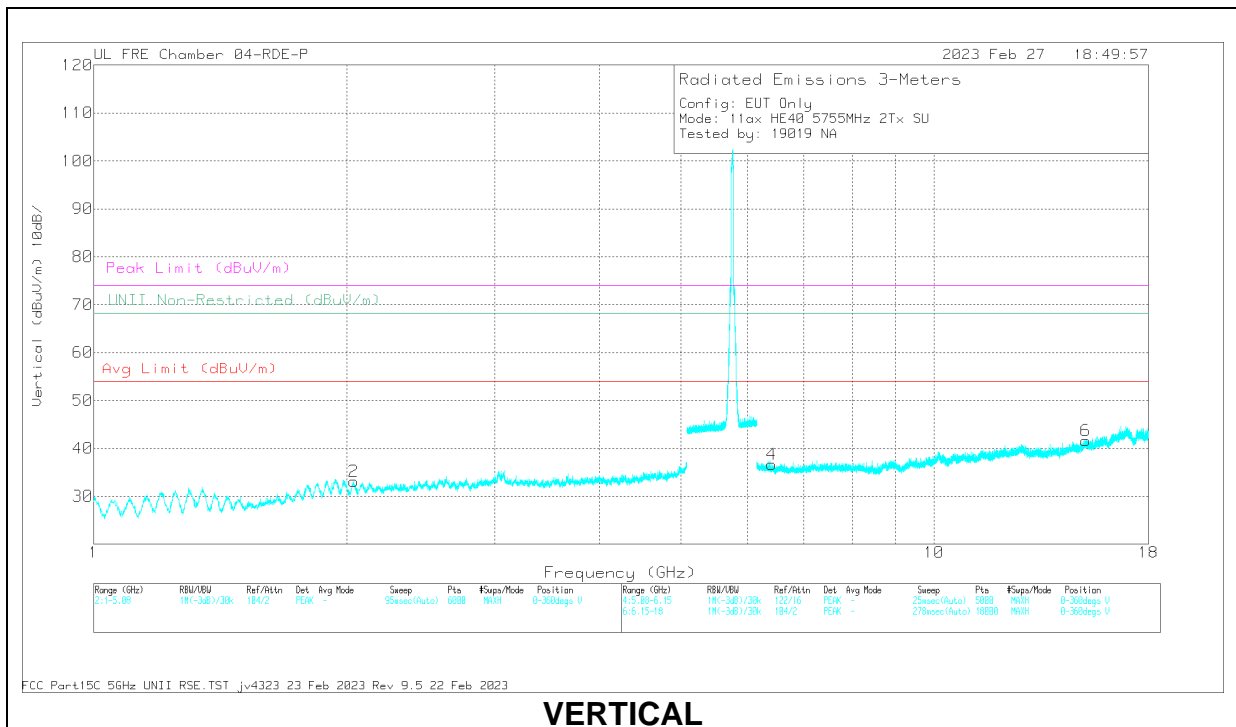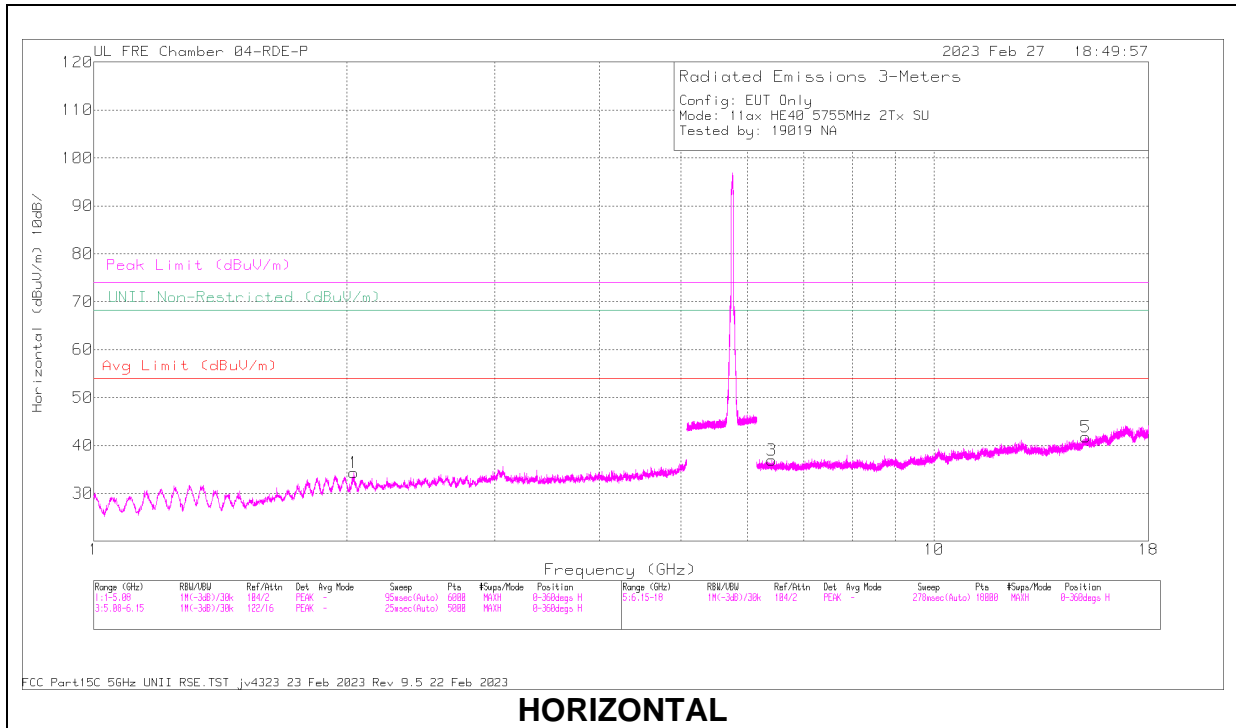


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF(dB) - 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.038174	61.17	PK-U	31.5	-49.09	43.58	68.2	-24.62	172	178	V
1	2.039951	61.17	PK-U	31.5	-49.21	43.46	68.2	-24.74	31	154	H
4	6.412314	55.91	PK-U	35.3	-44.43	46.78	68.2	-21.42	357	301	V
3	6.413131	55.51	PK-U	35.3	-44.37	46.44	68.2	-21.76	261	145	H
6	15.151715	54.91	PK-U	39.8	-43.07	51.64	68.2	-16.56	268	273	V
5	15.153553	54.39	PK-U	39.8	-43.09	51.1	68.2	-17.1	312	120	H

PK-U - U-NII: Maximum Peak

HIGH CHANNEL RESULTS

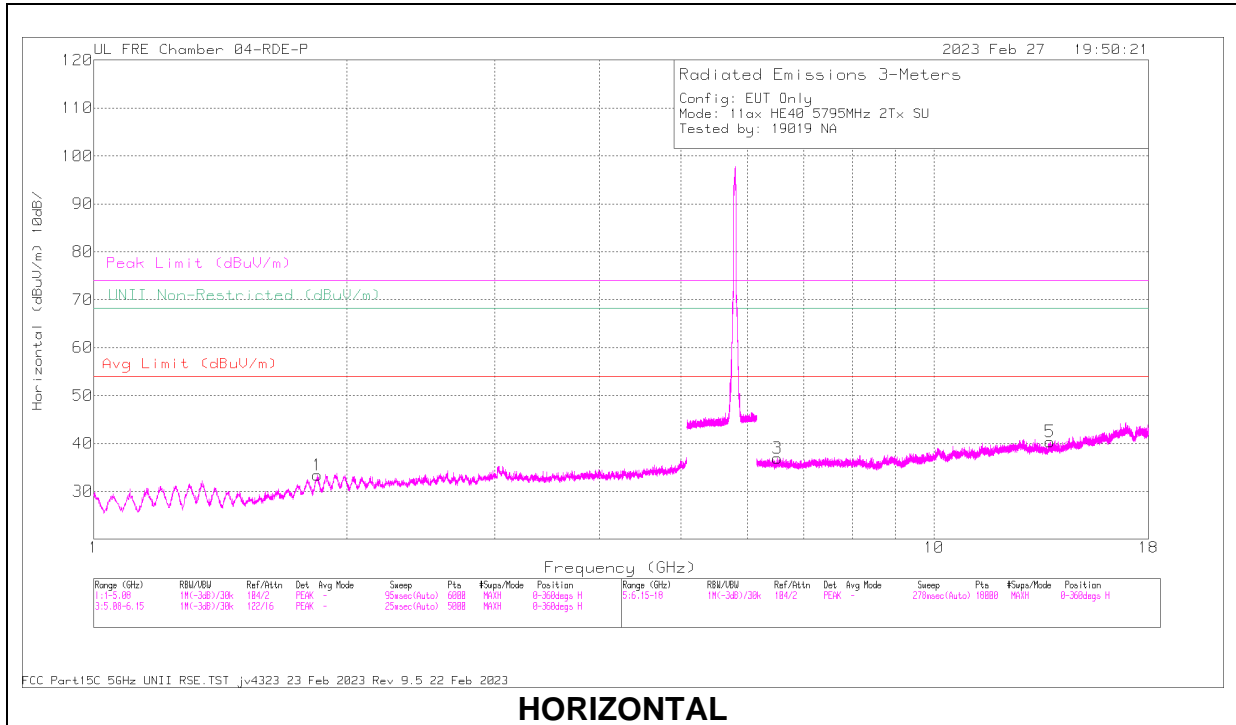

HORIZONTAL

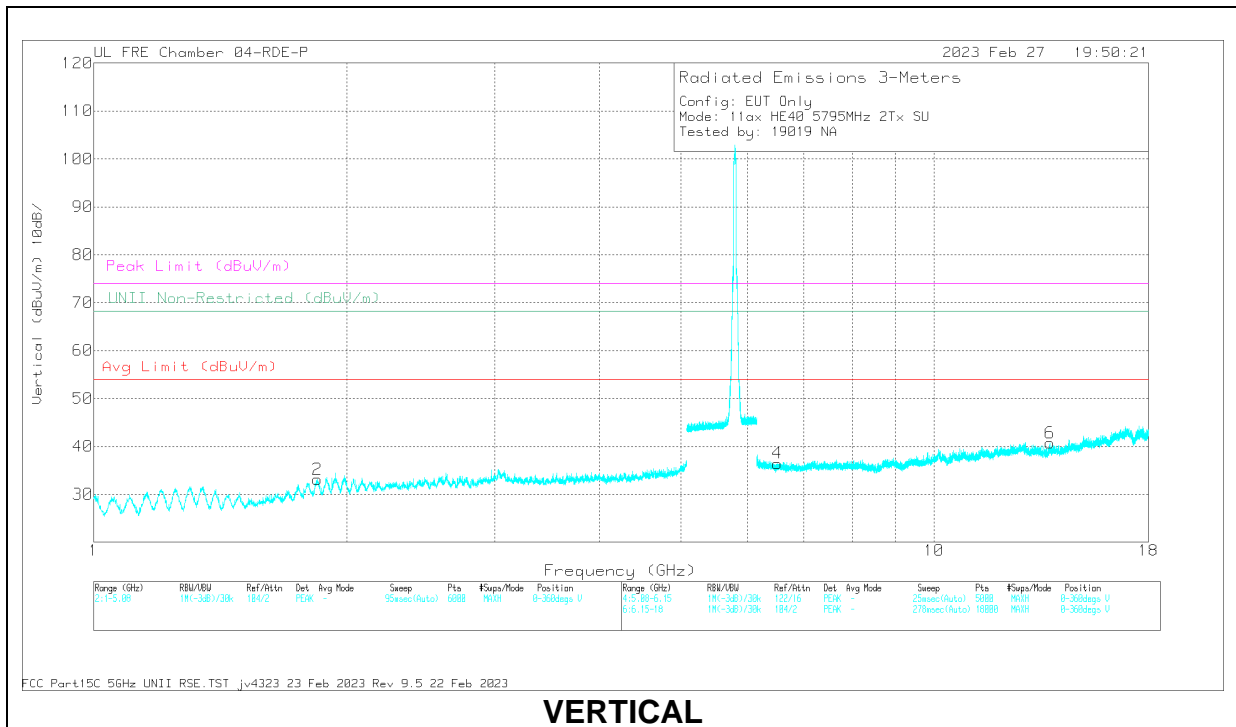

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF(dB) - 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.843551	61.01	PK-U	31	-49.14	42.87	68.2	-25.33	117	325	V
1	1.847613	61.03	PK-U	31	-49.05	42.98	68.2	-25.22	204	212	H
3	6.511248	55.5	PK-U	35.4	-44.54	46.36	68.2	-21.84	269	113	H
4	6.513347	55.58	PK-U	35.4	-44.51	46.47	68.2	-21.73	242	188	V
5	13.735625	54.37	PK-U	38.5	-43.67	49.2	68.2	-19	304	184	H
6	13.755326	54.36	PK-U	38.5	-43.37	49.49	68.2	-18.71	298	282	V


PK-U - U-NII: Maximum Peak

1.1.19. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.8GHz BAND

1TX Antenna 6 MODE: 26-Tone, RU Index 0

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

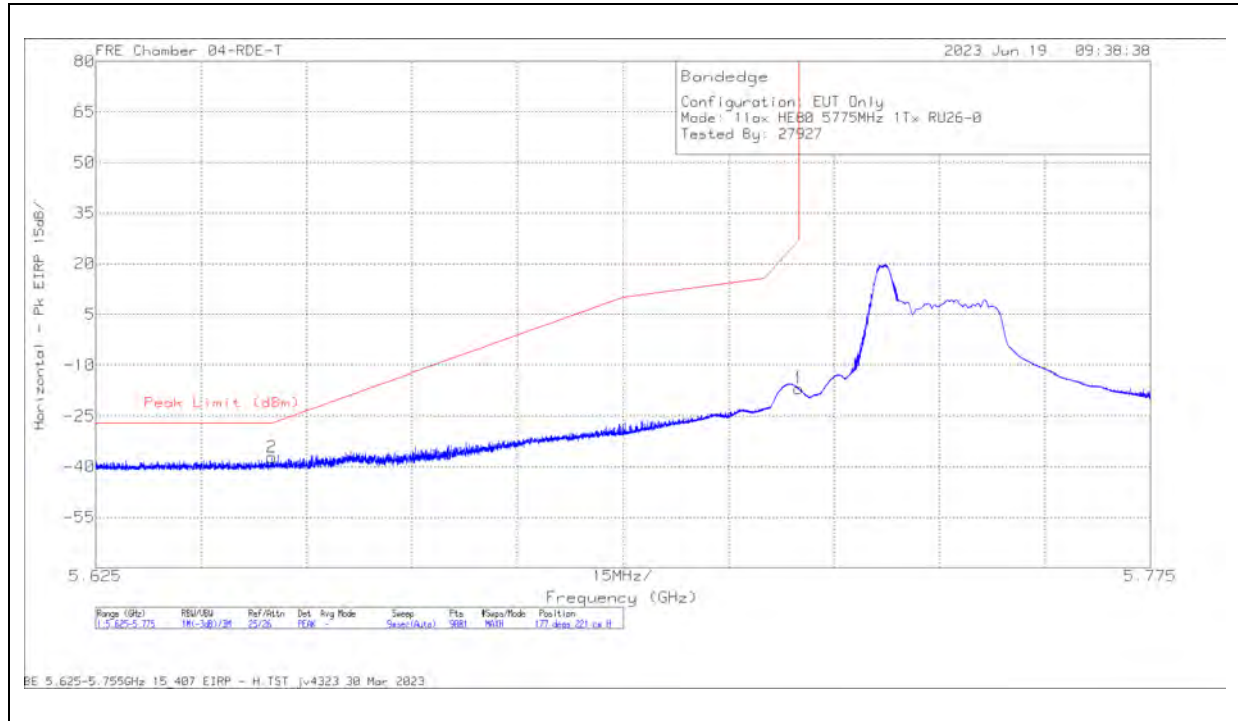

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB) 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.650051	-48.94	Pk	34.5	11.8	0	-34.52	-37.16	-26.96	-10.2	177	221	H
1	5.725	-28.8	Pk	34.6	11.8	0	-34.48	-16.88	27	-43.88	177	221	H

Pk - Peak detector

VERTICAL RESULT

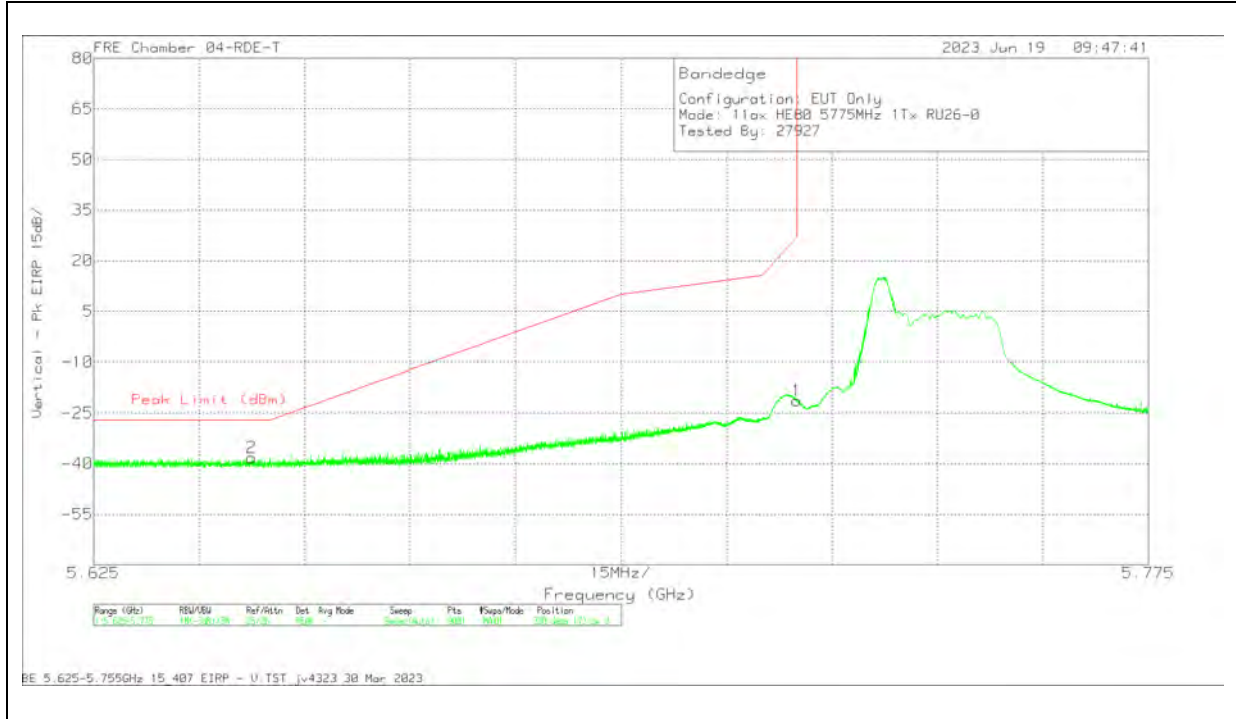


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB) 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647484	-49.94	Pk	34.5	11.8	0	-34.53	-38.17	-27	-11.17	330	173	V
1	5.725	-33.29	Pk	34.6	11.8	0	-34.48	-21.37	27	-48.37	330	173	V

Pk - Peak detector

1TX Antenna 6 MODE: 26-Tone, RU Index 36

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

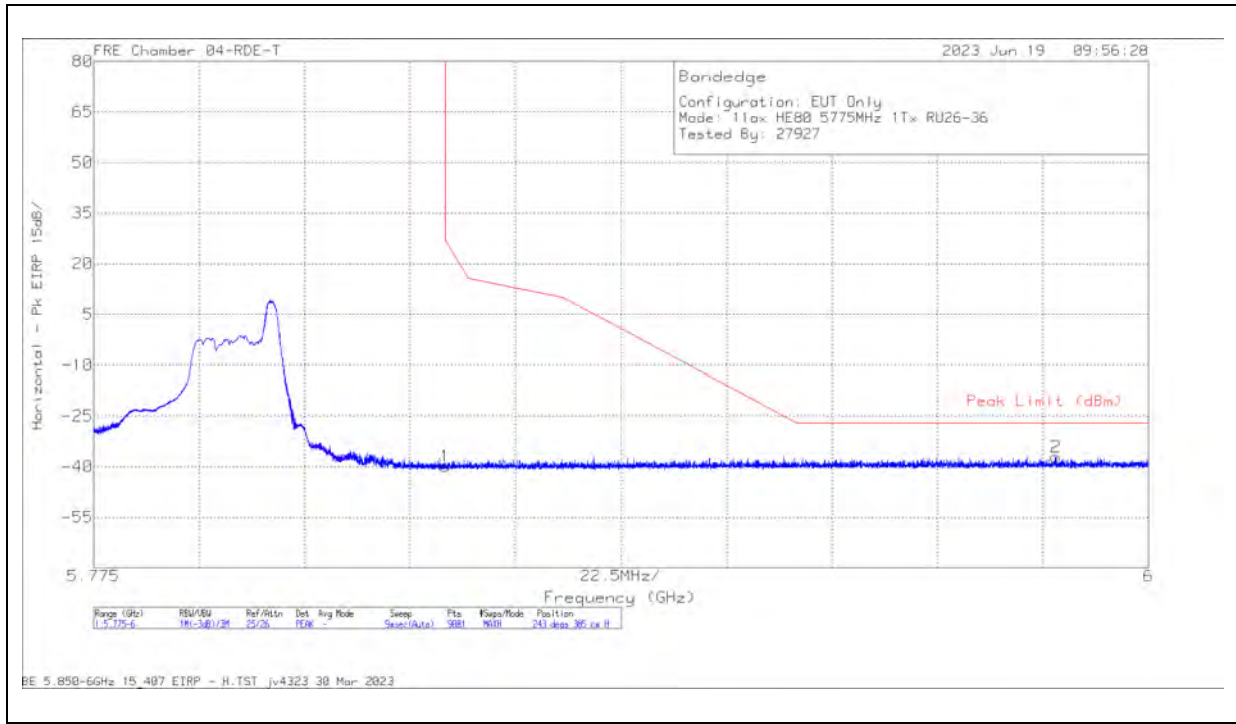

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB) 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.16	Pk	34.9	11.8	0	-34.34	-39.8	27	-66.8	243	385	H
2	5.980275	-49.72	Pk	35.2	11.8	0	-34.28	-37	-27	-10	243	385	H

Pk - Peak detector

VERTICAL RESULT

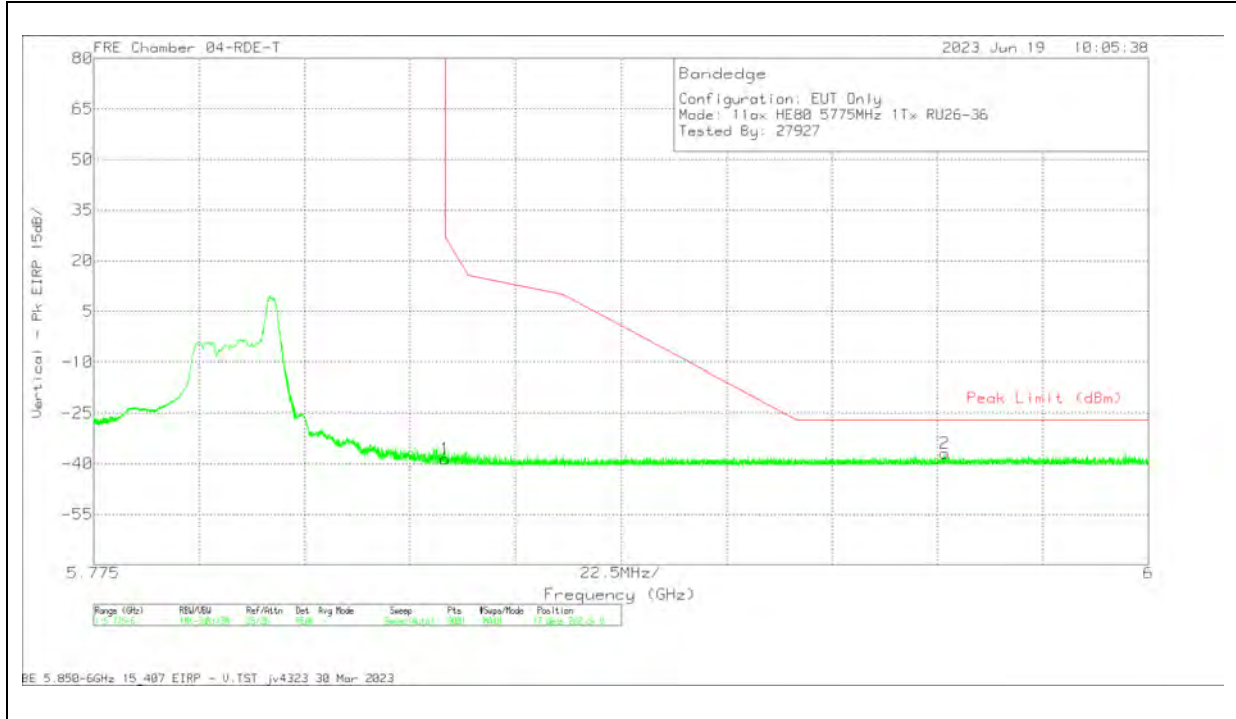


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB) 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-50.88	Pk	34.9	11.8	0	-34.34	-38.52	27	-65.52	17	262	V
2	5.9566	-49.56	Pk	35.1	11.8	0	-34.26	-36.92	-27	-9.92	17	262	V

Pk - Peak detector

1TX Antenna 6 MODE: SU, Single User

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

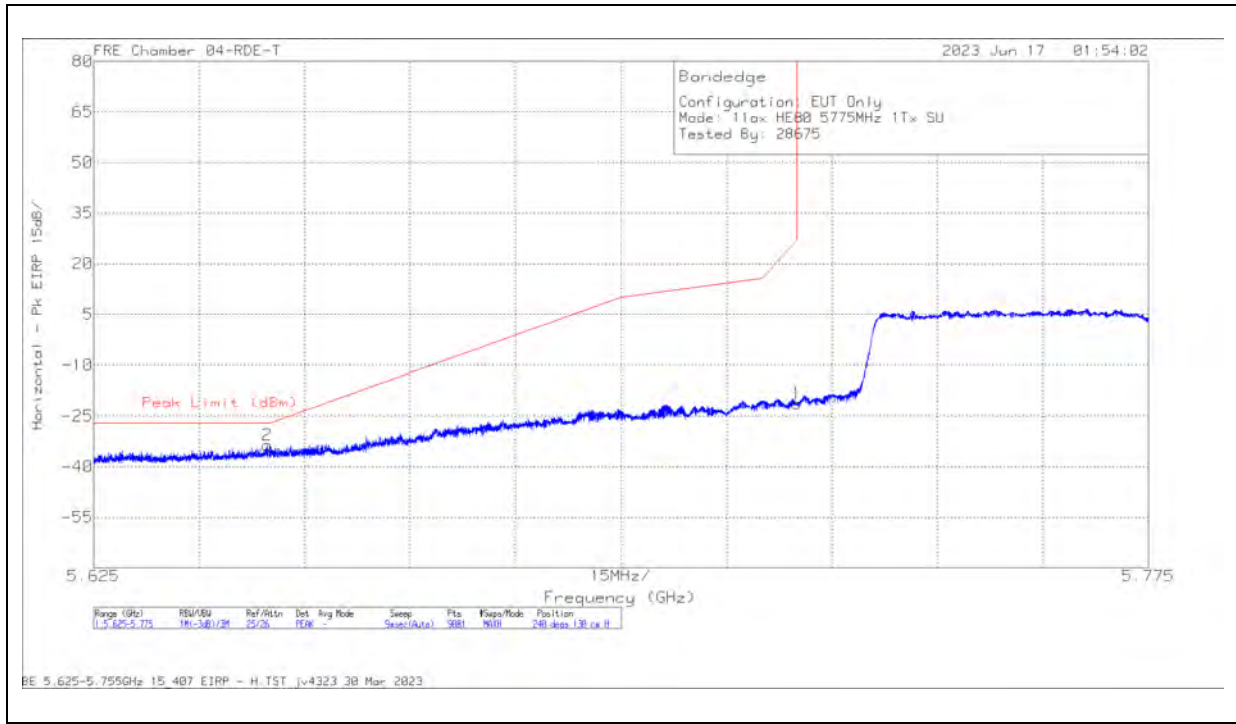

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB) 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64965	-45.27	Pk	34.5	11.8	0	-34.52	-33.49	-27	-6.49	240	130	H
1	5.725	-33.14	Pk	34.6	11.8	0	-34.48	-21.22	27	-48.22	240	130	H

Pk - Peak detector

VERTICAL RESULT

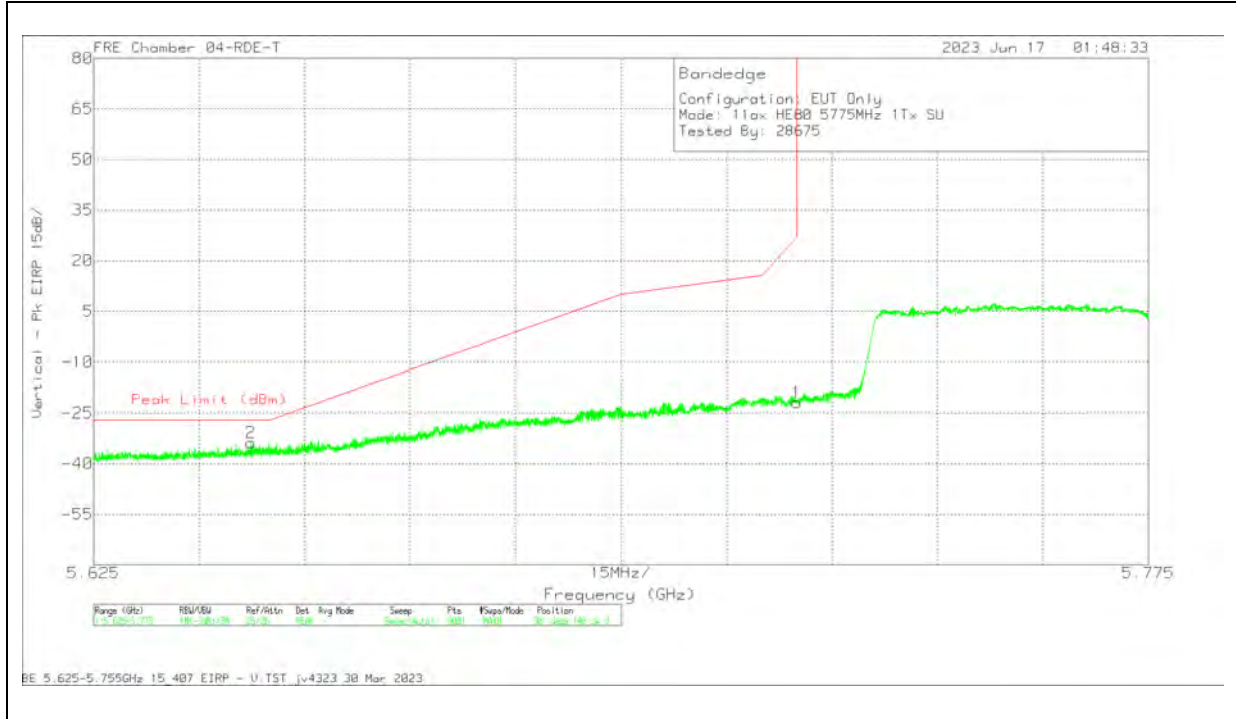


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB) 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64735	-45.54	Pk	34.5	11.8	0	-34.53	-33.77	-27	-6.77	301	148	V
1	5.725	-33.8	Pk	34.6	11.8	0	-34.48	-21.88	27	-48.88	301	148	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

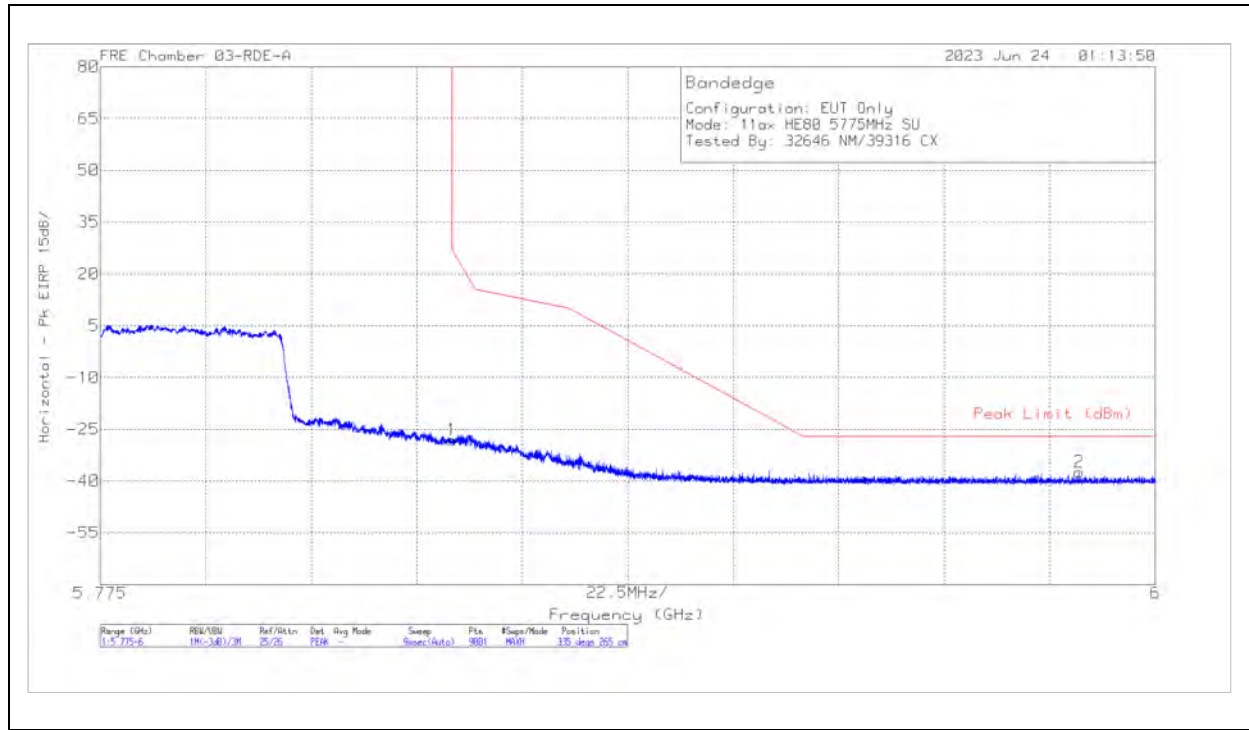

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-37.62	Pk	35.2	11.8	0	-37.49	-28.11	27	-55.11	335	265	H
2	5.9838	-47.39	Pk	35.4	11.8	0	-37.24	-37.43	-27	-10.43	335	265	H

Pk - Peak detector

VERTICAL RESULT

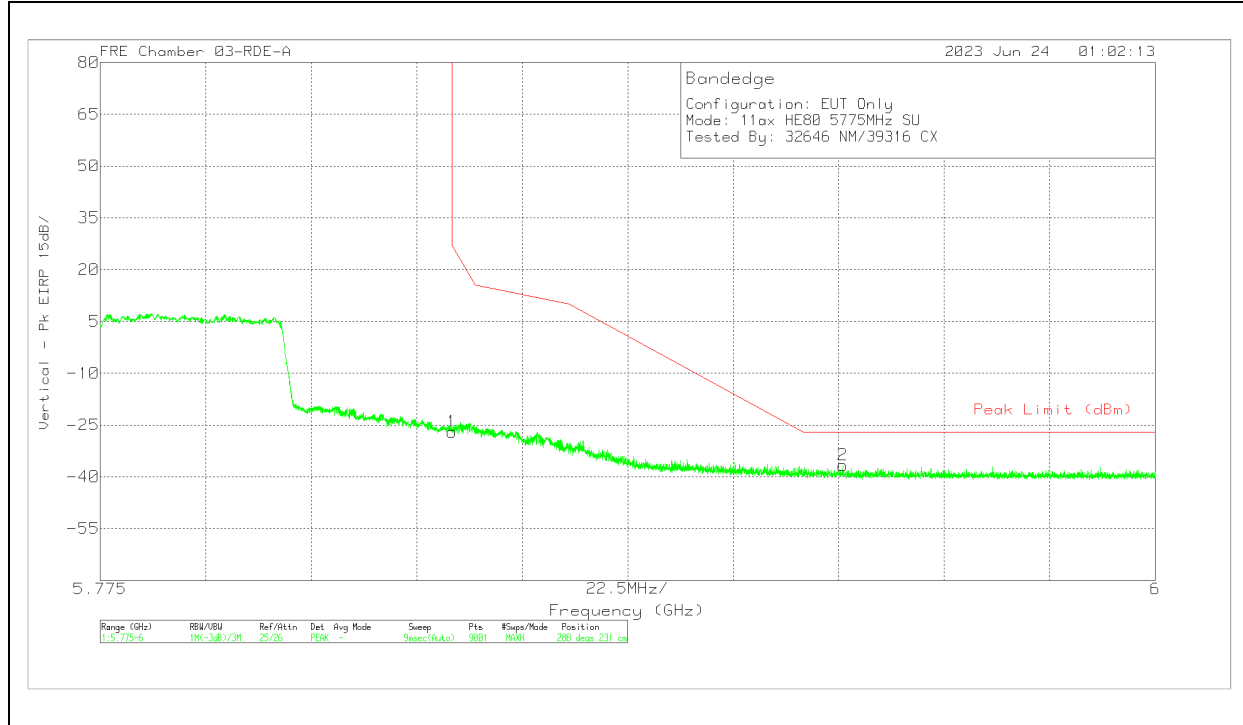


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-36.46	Pk	35.2	11.8	0	-37.49	-26.95	27	-53.95	288	231	V
2	5.9334	-46.42	Pk	35.3	11.8	0	-37.31	-36.63	-27	-9.63	288	231	V

Pk - Peak detector

1TX Antenna 5 MODE: 26-Tone, RU Index 0

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

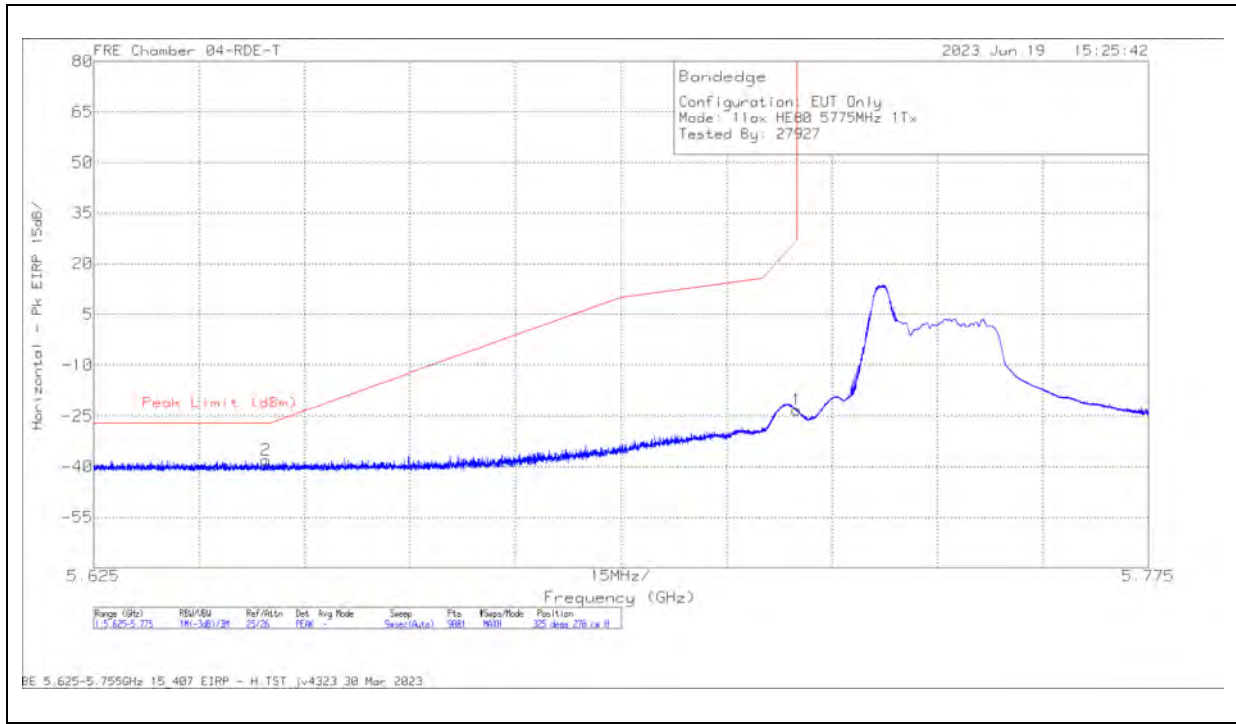

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB) 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649467	-49.72	Pk	34.5	11.8	0	-34.51	-37.93	-27	-10.93	325	278	H
1	5.725	-35.08	Pk	34.6	11.8	0	-34.48	-23.16	27	-50.16	325	278	H

Pk - Peak detector

VERTICAL RESULT

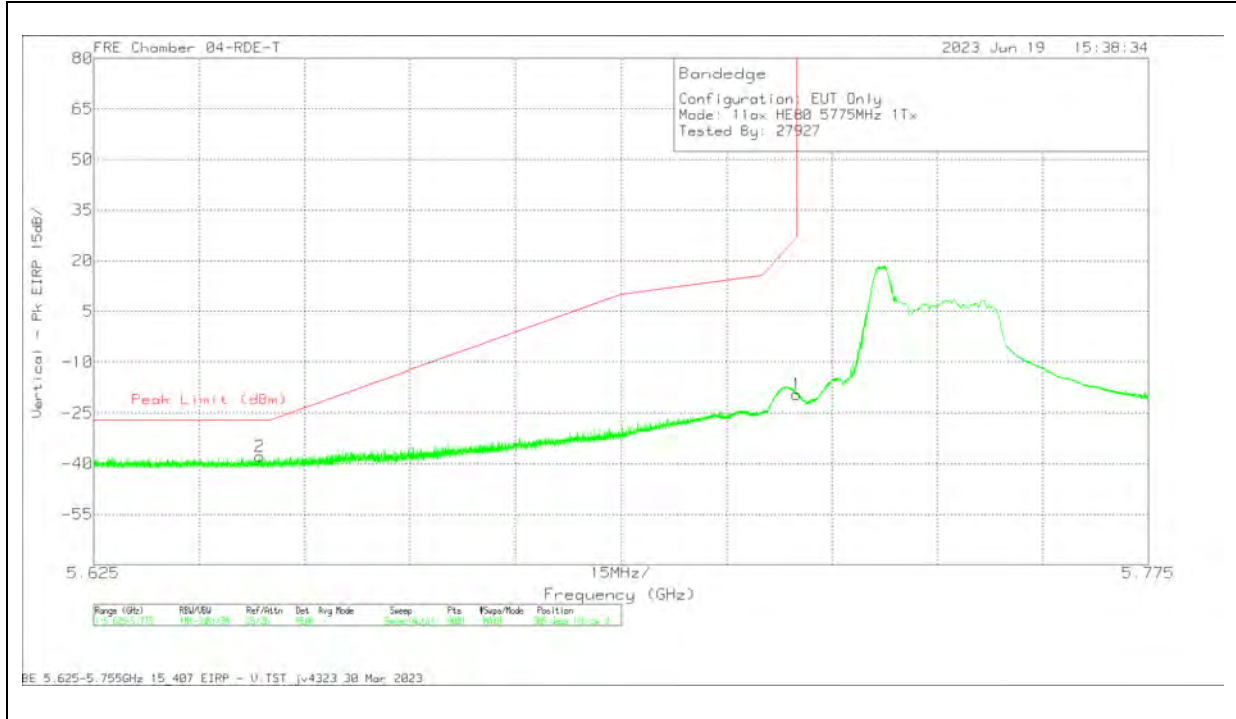


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB) 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648584	-49.61	Pk	34.5	11.8	0	-34.51	-37.82	-27	-10.82	305	116	V
1	5.725	-31.33	Pk	34.6	11.8	0	-34.48	-19.41	27	-46.41	305	116	V

Pk - Peak detector

1TX Antenna 5 MODE: 26-Tone, RU Index 36

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

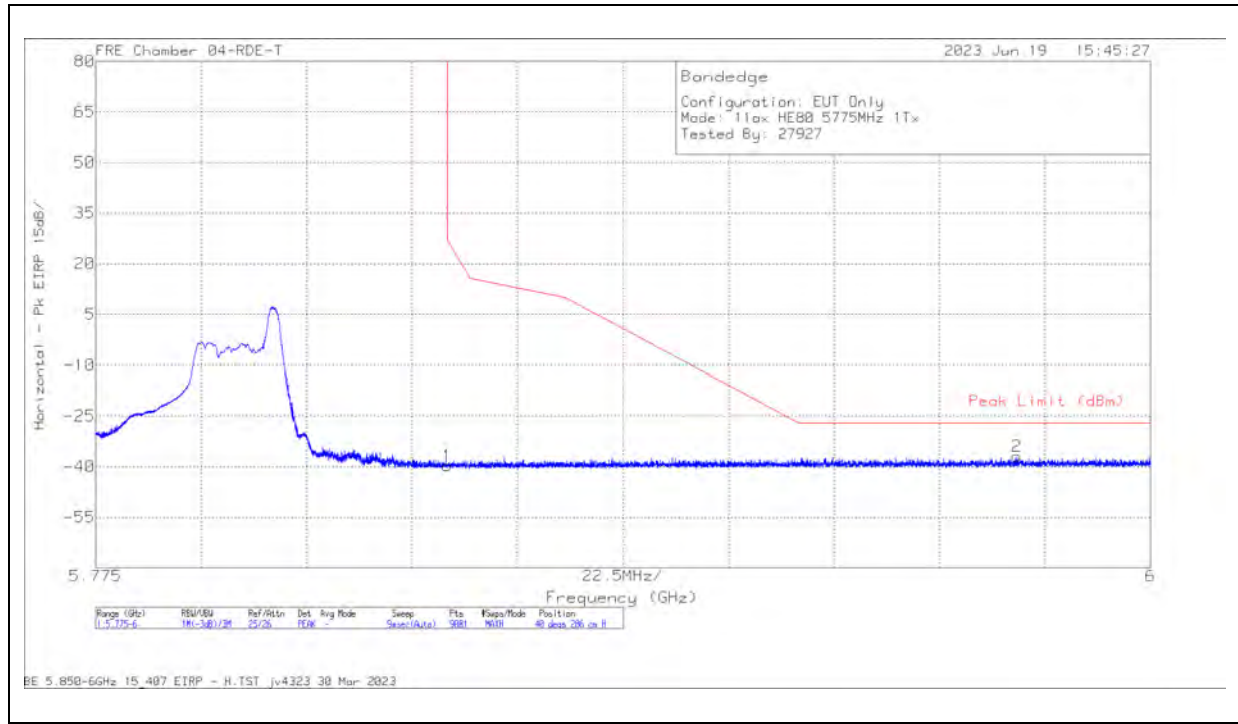

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB) 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-51.96	Pk	34.9	11.8	0	-34.34	-39.6	27	-66.6	40	286	H
2	5.971475	-49.71	Pk	35.2	11.8	0	-34.25	-36.96	-27	-9.96	40	286	H

Pk - Peak detector

VERTICAL RESULT

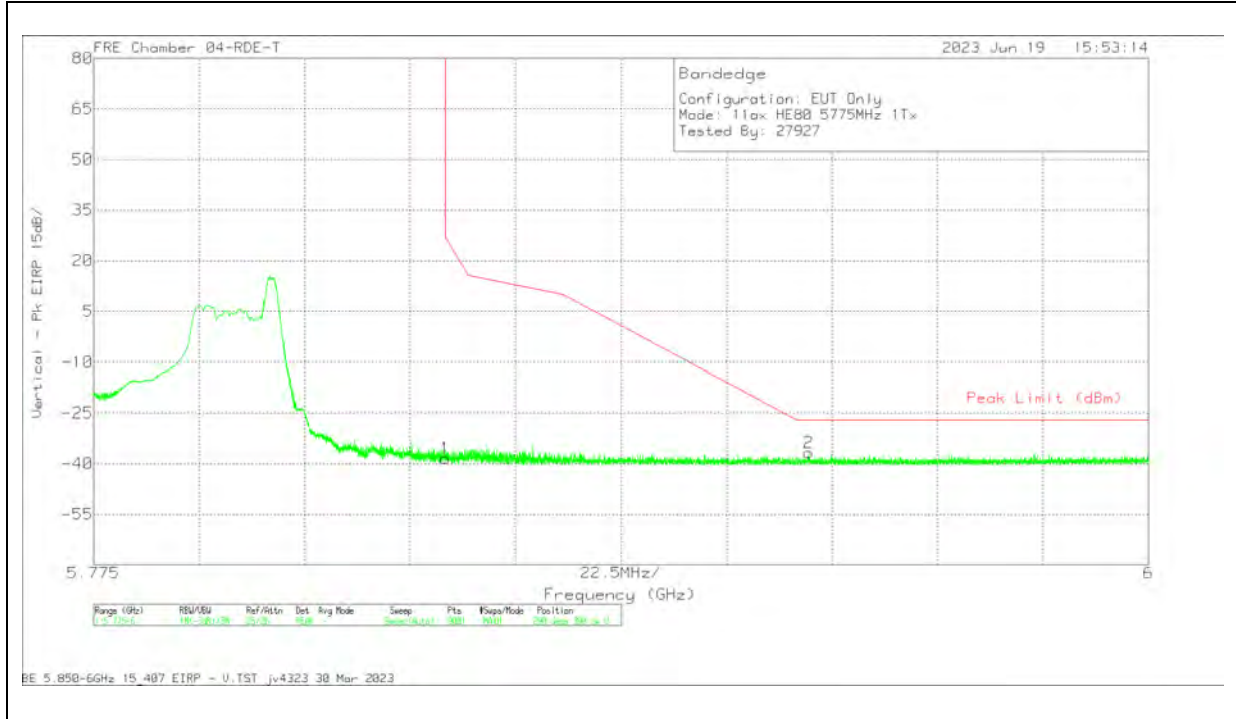


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	226673 ACF (dB) 3mH	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-50.75	Pk	34.9	11.8	0	-34.34	-38.39	27	-65.39	290	390	V
2	5.927475	-49.44	Pk	35.1	11.8	0	-34.23	-36.77	-27	-9.77	290	390	V

Pk - Peak detector

1TX Antenna 5 MODE: SU, Single User

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

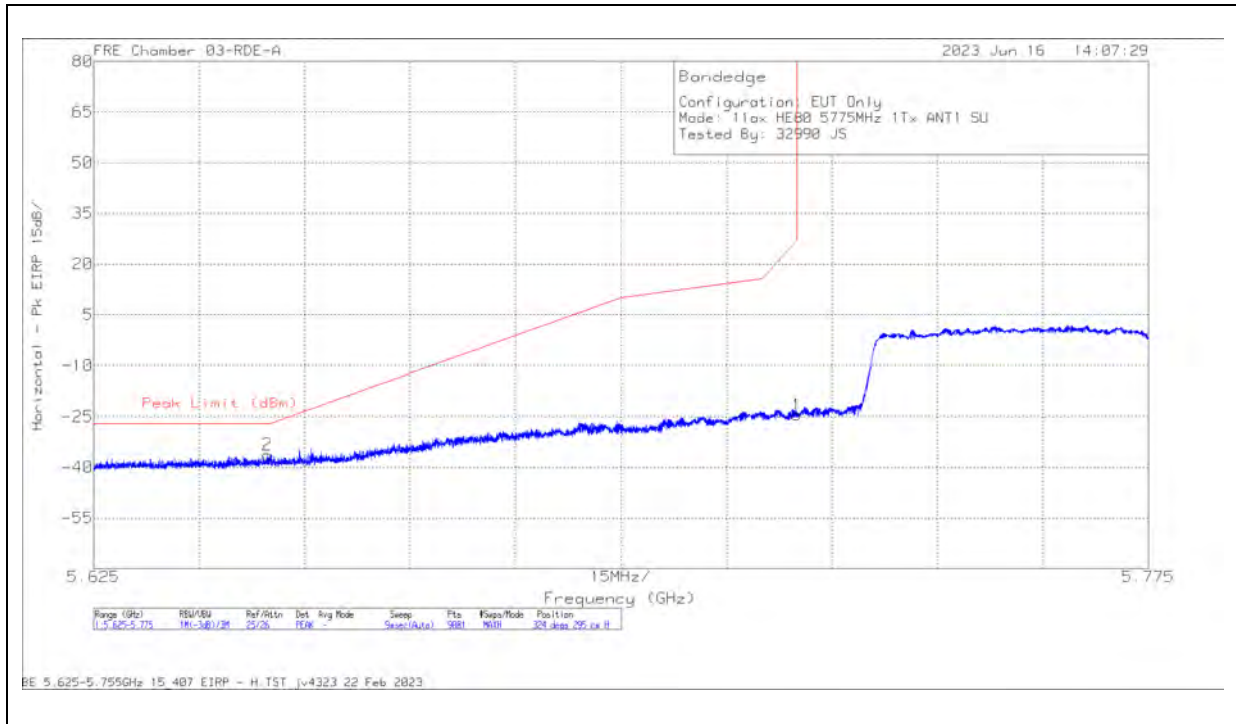

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649717	-45.3	Pk	35.2	11.8	0	-37.94	-36.24	-27	-9.24	324	295	H
1	5.725	-33.69	Pk	35.2	11.8	0	-37.78	-24.47	27	-51.47	324	295	H

Pk - Peak detector

VERTICAL RESULT

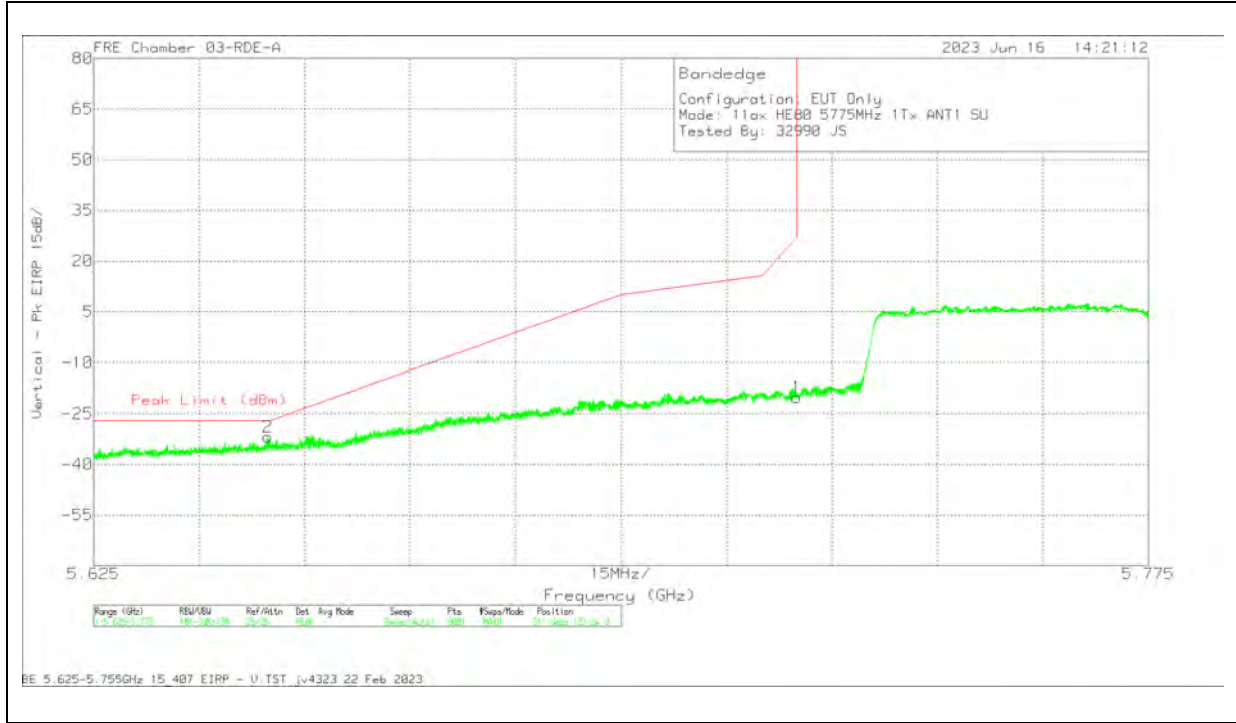


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.649801	-40.85	Pk	35.2	11.8	0	-37.94	-31.79	-27	-4.79	311	133	V
1	5.725	-29.36	Pk	35.2	11.8	0	-37.78	-20.14	27	-47.14	311	133	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

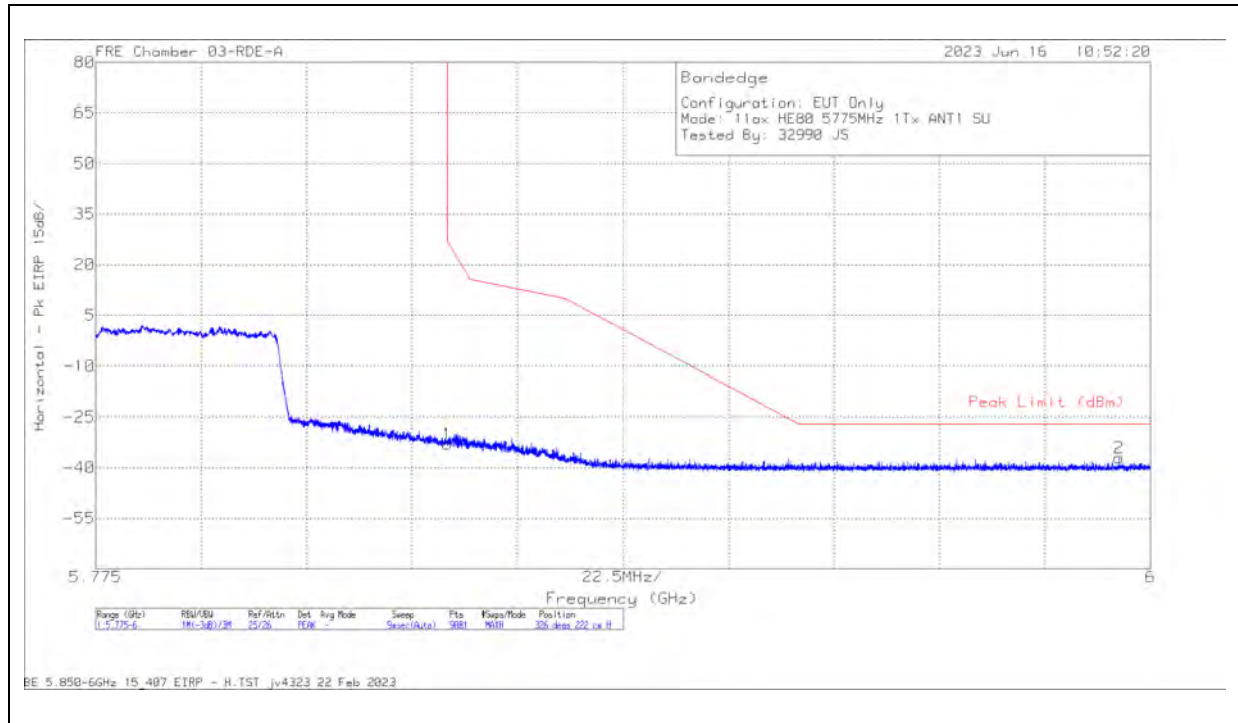

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.5	Pk	35.2	11.8	0	-37.49	-32.99	27	-59.99	326	222	H
2	5.9933	-47.17	Pk	35.5	11.8	0	-37.22	-37.09	-27	-10.09	326	222	H

Pk - Peak detector

VERTICAL RESULT

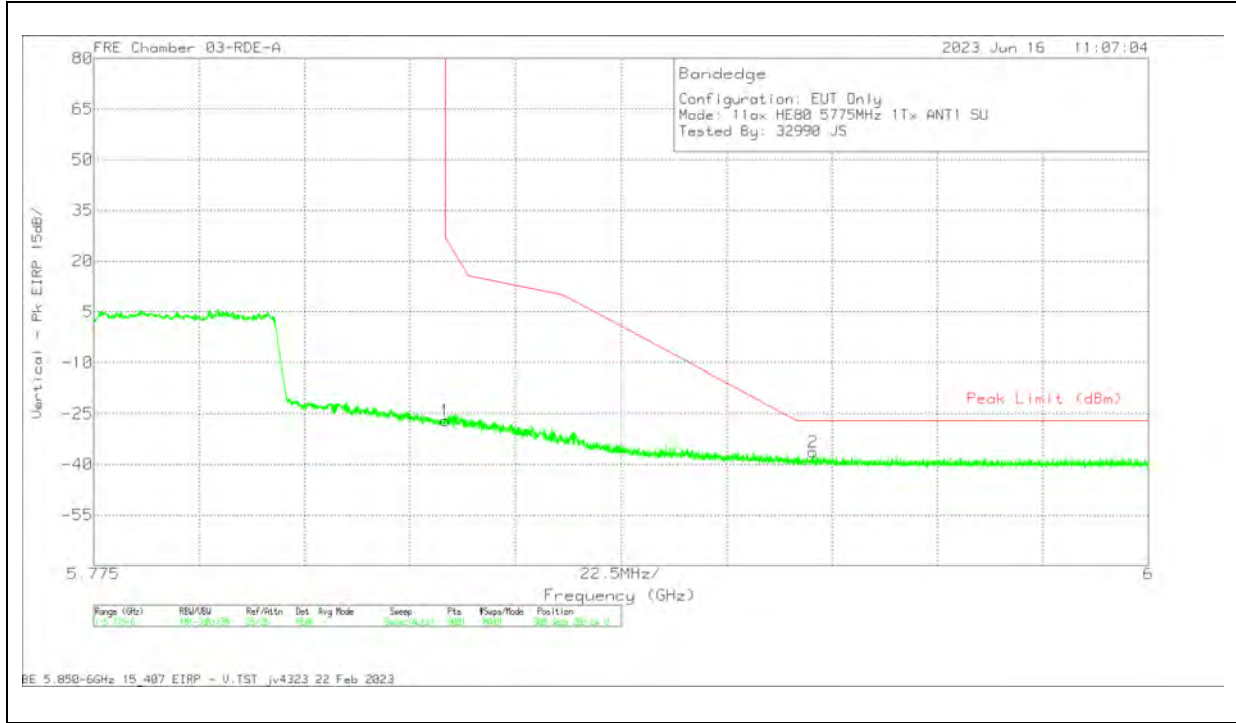


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-36.59	Pk	35.2	11.8	0	-37.49	-27.08	27	-54.08	308	202	V
2	5.928525	-46.08	Pk	35.3	11.8	0	-37.3	-36.28	-27	-9.28	308	202	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: 26-Tone, RU Index 0

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

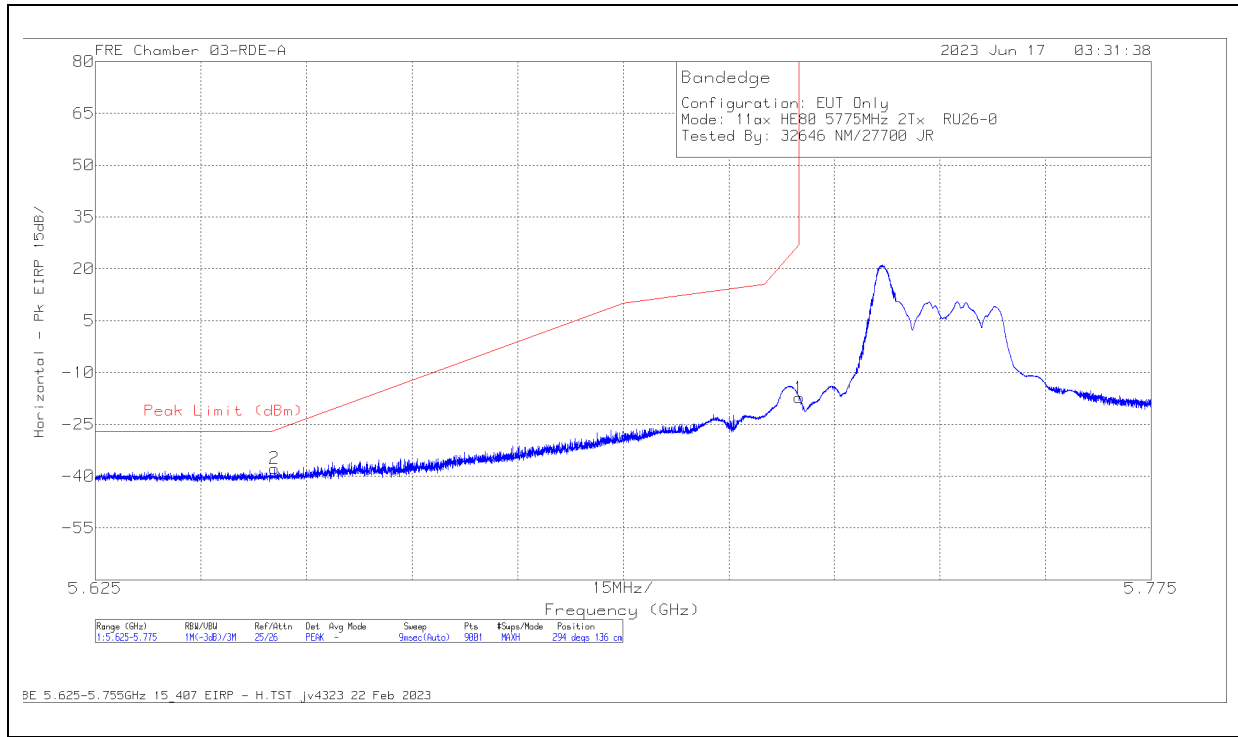

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.650451	-46.82	Pk	35.2	11.8	0	-37.94	-37.76	-26.67	-11.09	294	136	H
1	5.725	-26.5	Pk	35.2	11.8	0	-37.78	-17.28	27	-44.28	294	136	H

Pk - Peak detector

VERTICAL RESULT


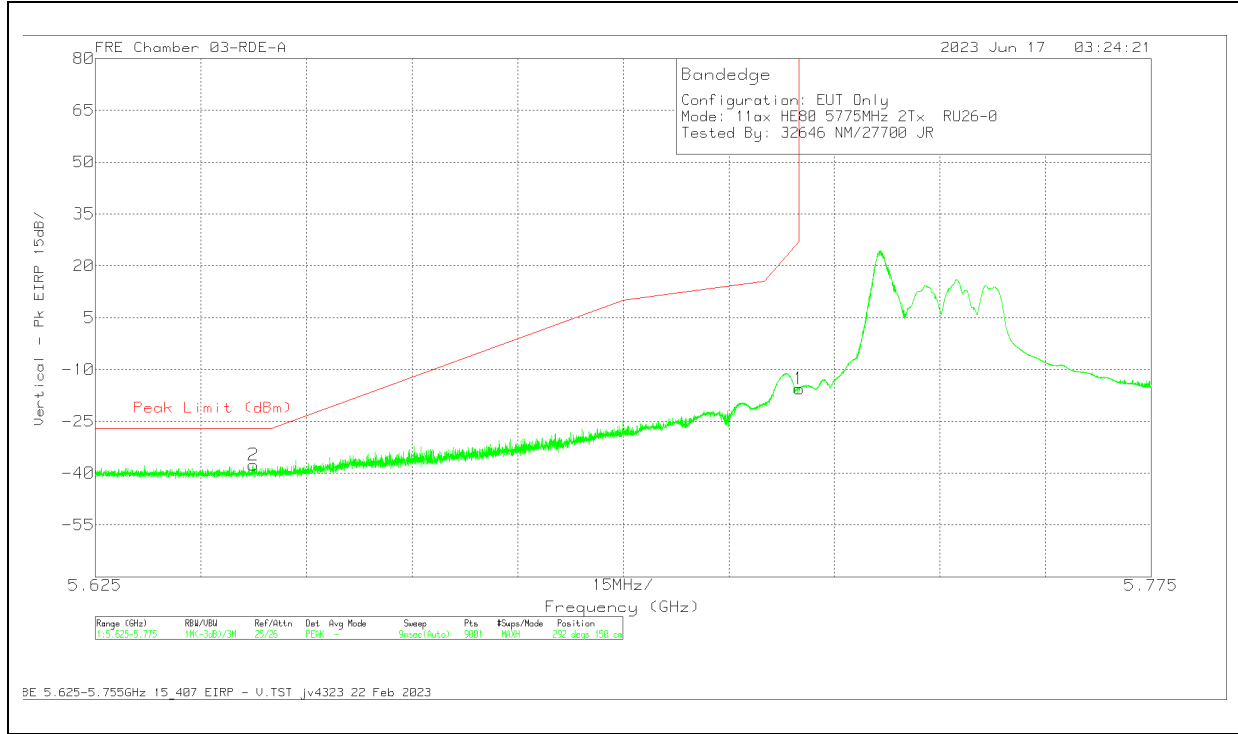


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64745	-46.69	Pk	35.2	11.8	0	-37.93	-37.62	-27	-10.62	292	150	V
1	5.725	-24.78	Pk	35.2	11.8	0	-37.78	-15.56	27	-42.56	292	150	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

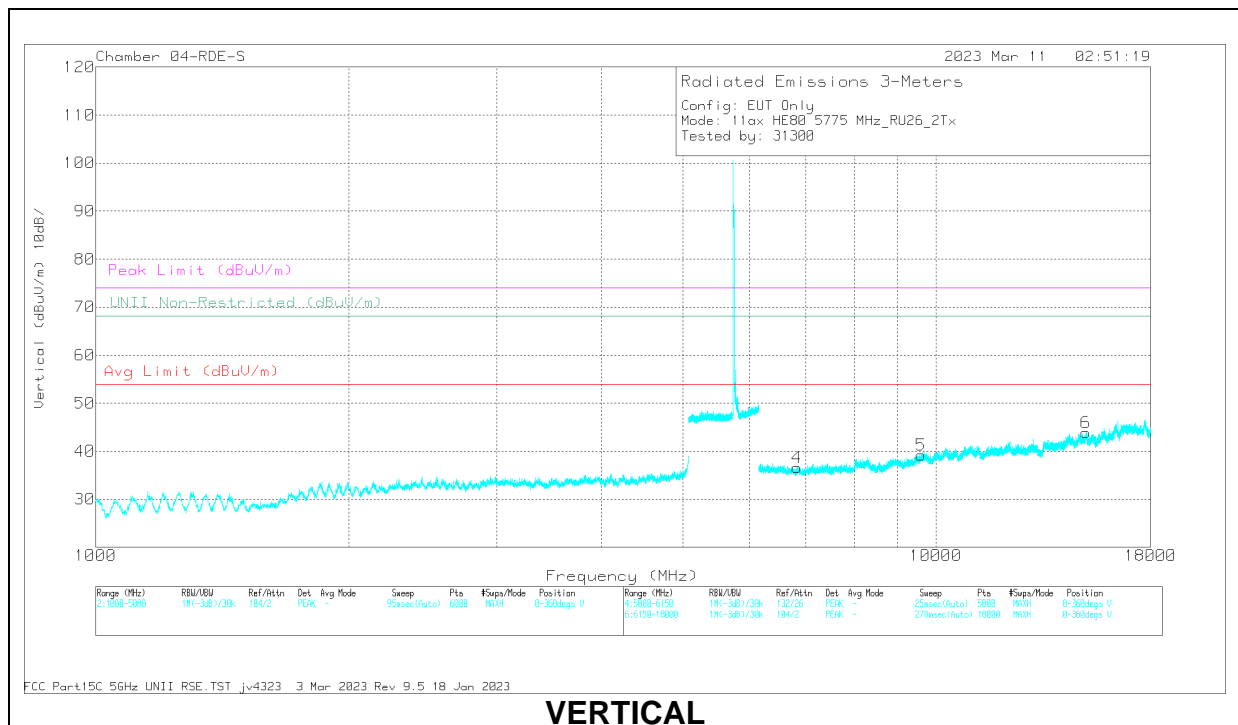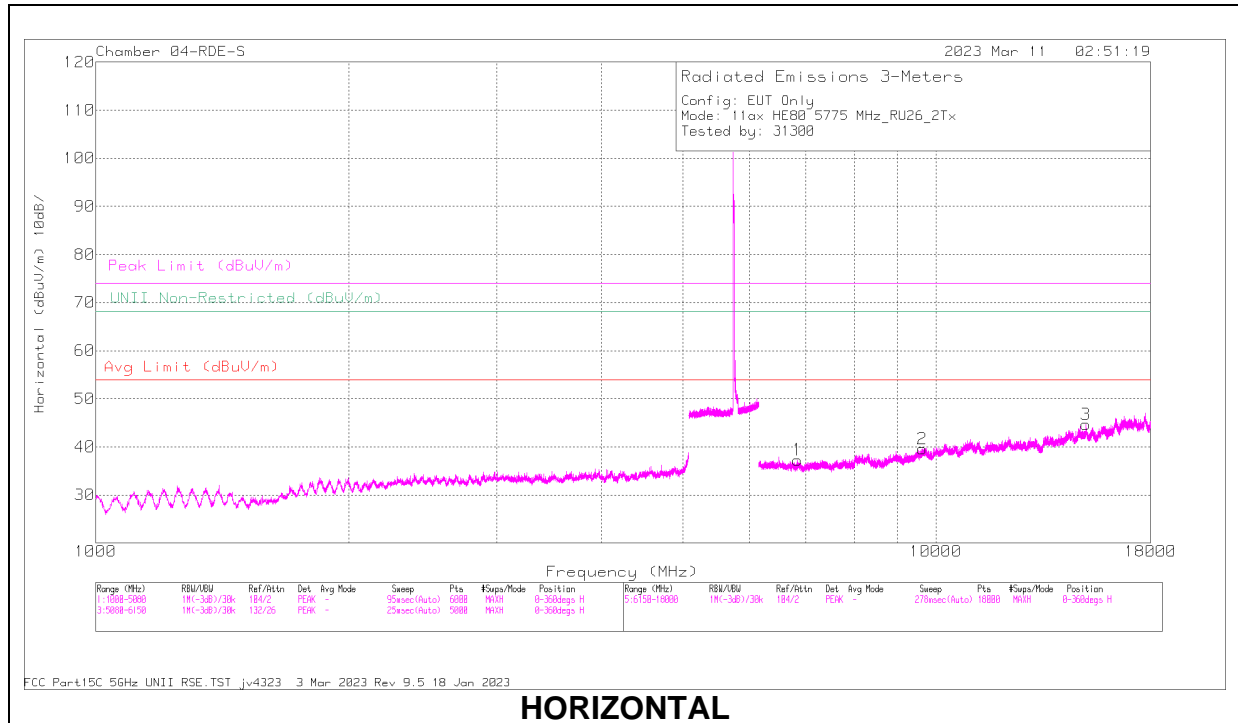

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200784 ACF (dB) 3mH	Gain/Loss (dB)	Corrected Reading (dBuV/m)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	6829.776	53.95	PK-U	35.7	-43.46	46.19	68.2	-22.01	66	144	V
1	6844.657	54.53	PK-U	35.7	-43.51	46.72	68.2	-21.48	41	100	H
5	9603.545	54.59	PK-U	36.7	-42.7	48.59	68.2	-19.61	86	153	V
2	9628.339	55.03	PK-U	36.7	-42.81	48.92	68.2	-19.28	67	134	H
3	15076.023	53.71	PK-U	39.7	-40.02	53.39	68.2	-14.81	93	159	H
6	15076.099	53.68	PK-U	39.7	-40.02	53.36	68.2	-14.84	107	123	V

PK-U - U-NII: Maximum Peak

2TX Antenna 6 + Antenna 5 OFDMA MODE: 26-Tone, RU Index 36

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

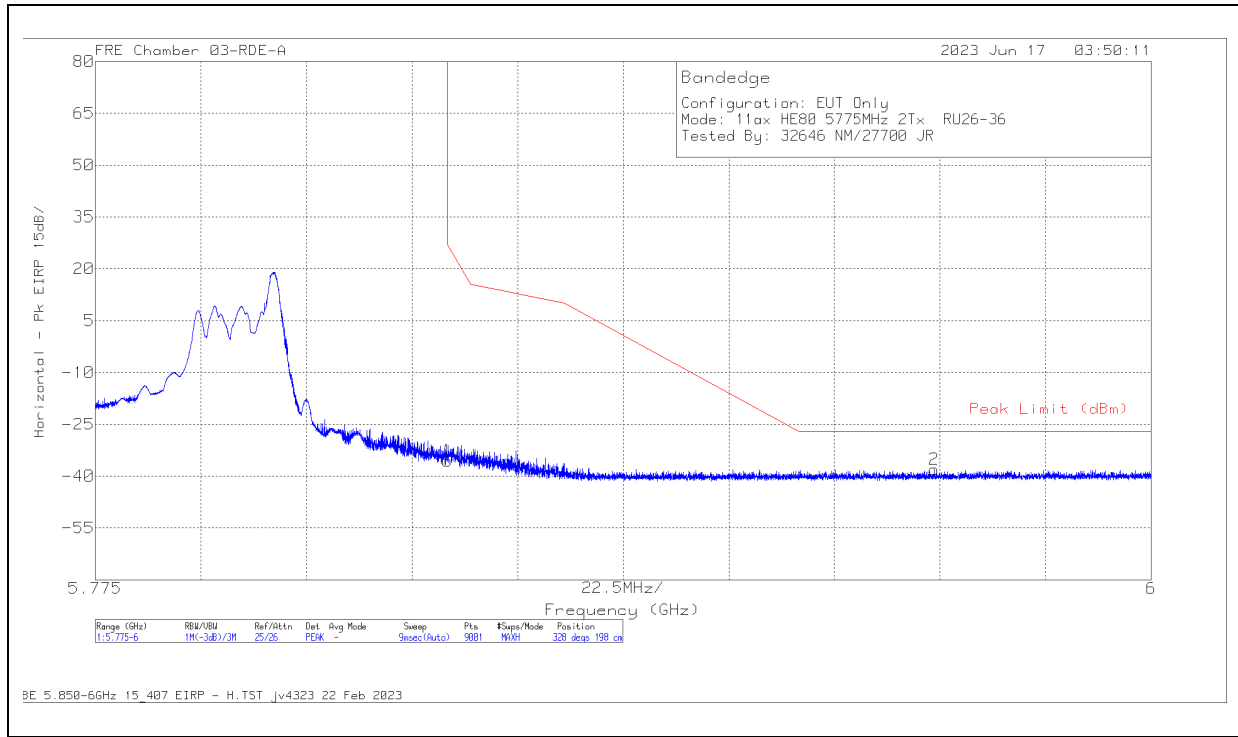

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-45.04	Pk	35.2	11.8	0	-37.49	-35.53	27	-62.53	328	198	H
2	5.953725	-47.85	Pk	35.3	11.8	0	-37.28	-38.03	-27	-11.03	328	198	H

Pk - Peak detector

VERTICAL RESULT

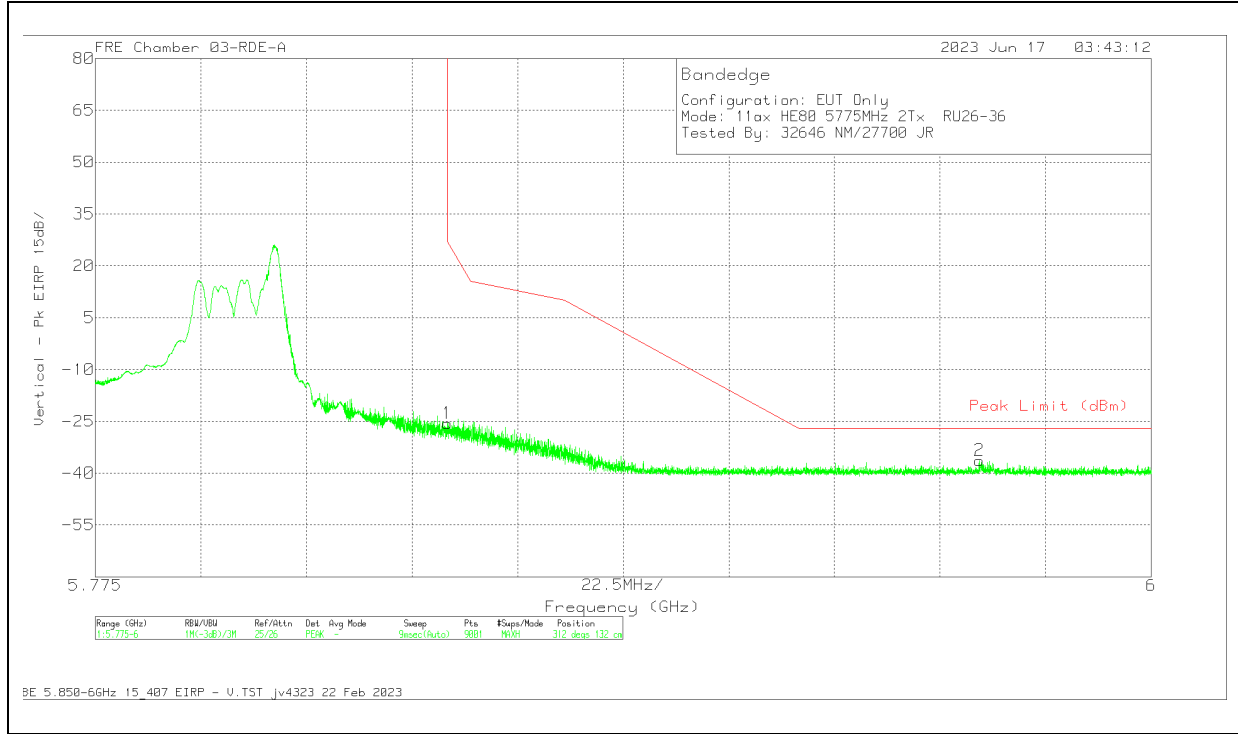


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-35.11	Pk	35.2	11.8	0	-37.49	-25.6	27	-52.6	312	132	V
2	5.9634	-46.24	Pk	35.4	11.8	0	-37.26	-36.3	-27	-9.3	312	132	V

Pk - Peak detector

2TX Antenna 6 + Antenna 5 OFDMA MODE: SU, Single User

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

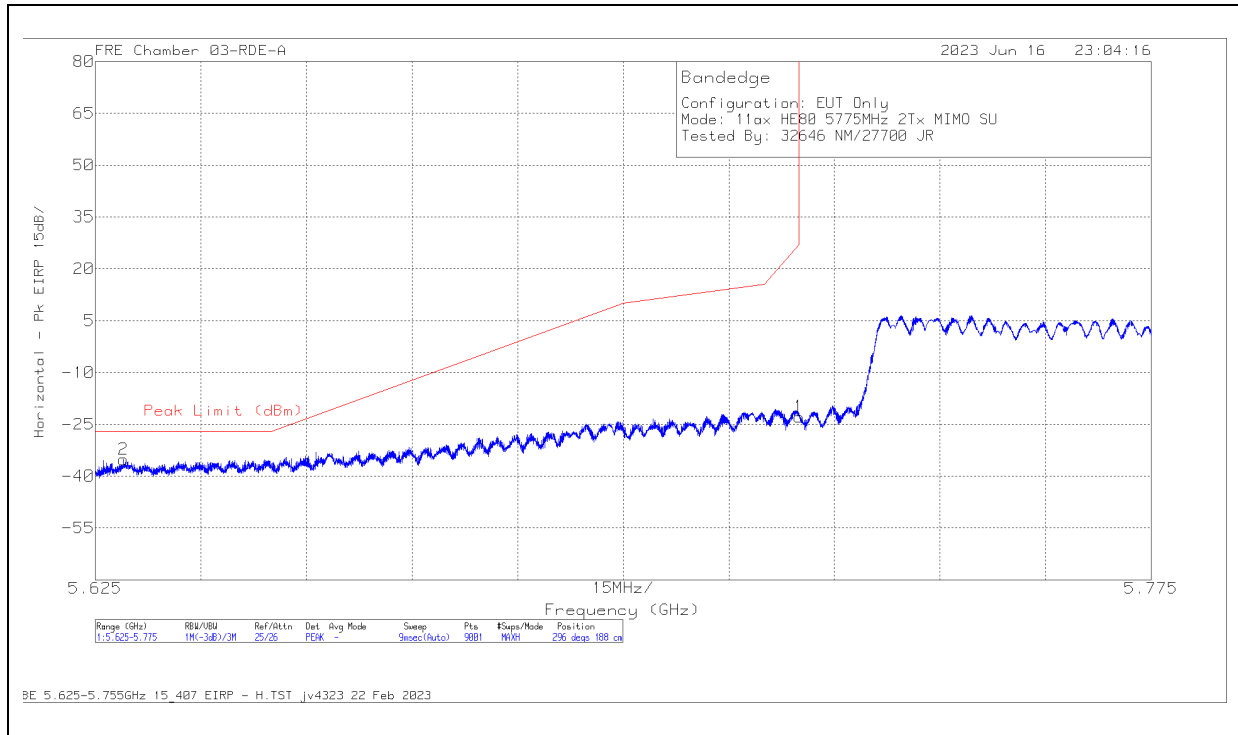

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.629017	-44.08	Pk	35.1	11.8	0	-37.97	-35.15	-27	-8.15	296	188	H
1	5.725	-32.05	Pk	35.2	11.8	0	-37.78	-22.83	27	-49.83	296	188	H

Pk - Peak detector

VERTICAL RESULT

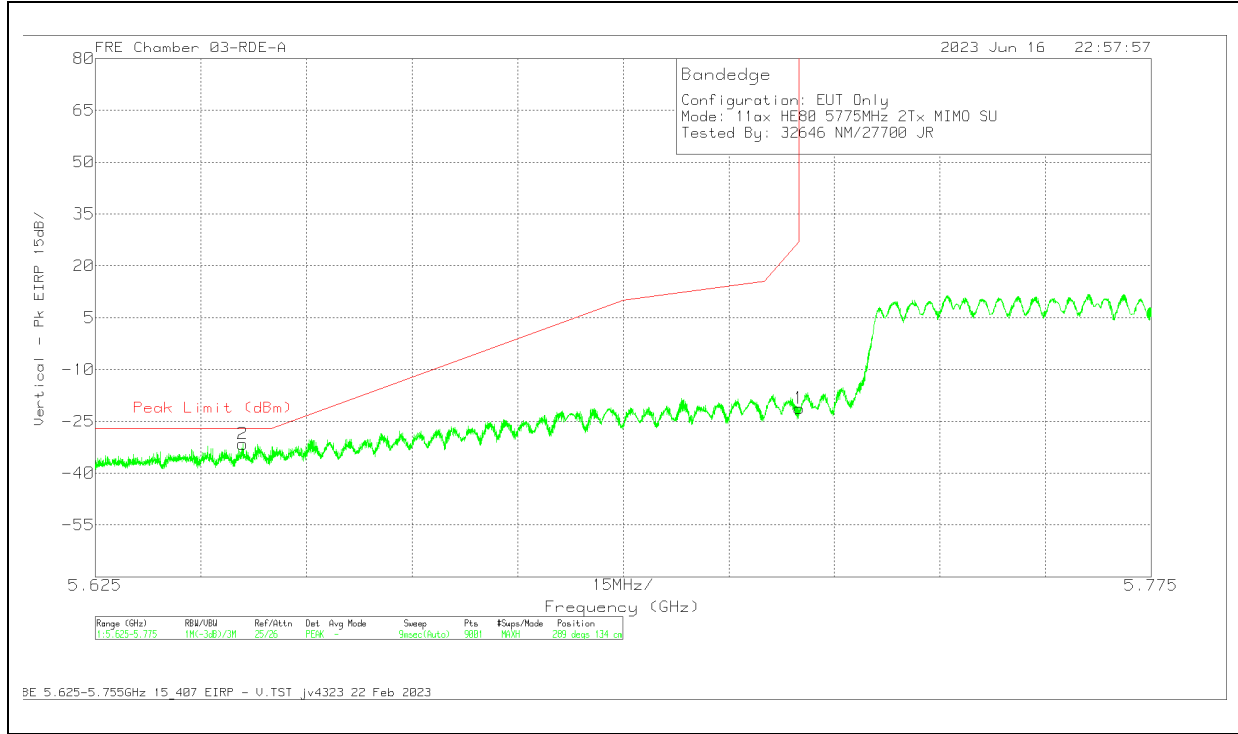


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.645934	-40.59	Pk	35.2	11.8	0	-37.92	-31.51	-27	-4.51	289	134	V
1	5.725	-30.42	Pk	35.2	11.8	0	-37.78	-21.2	27	-48.2	289	134	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

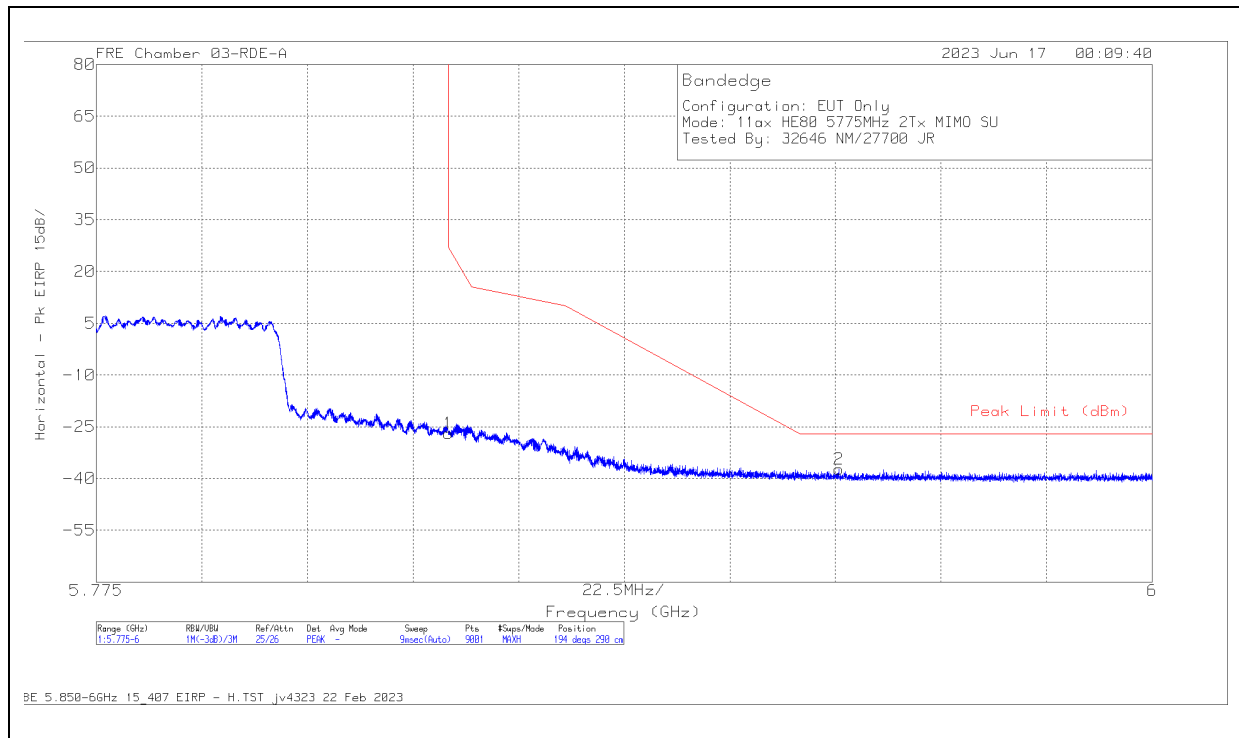

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-36.41	Pk	35.2	11.8	0	-37.49	-26.9	27	-53.9	194	290	H
2	5.933225	-47.11	Pk	35.3	11.8	0	-37.31	-37.32	-27	-10.32	194	290	H

Pk - Peak detector

VERTICAL RESULT


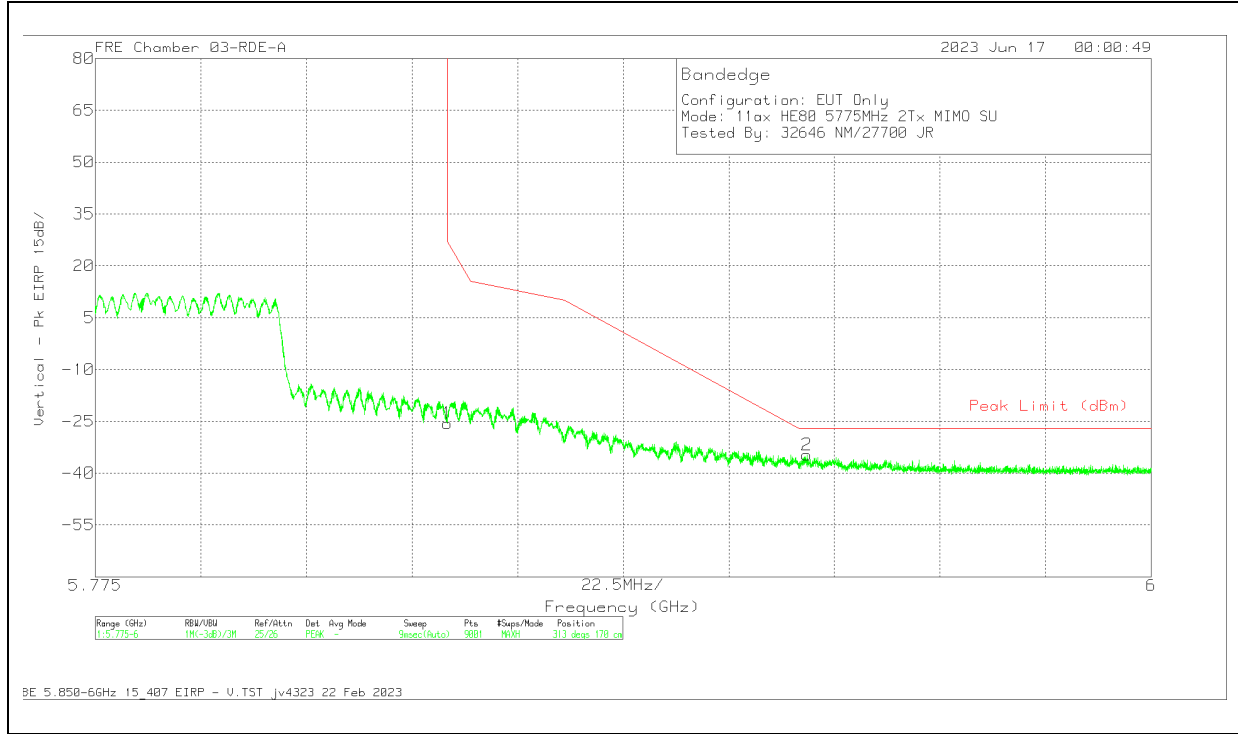


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	230299 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-35.1	Pk	35.2	11.8	0	-37.49	-25.59	27	-52.59	313	170	V
2	5.926625	-44.48	Pk	35.3	11.8	0	-37.32	-34.7	-27	-7.7	313	170	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

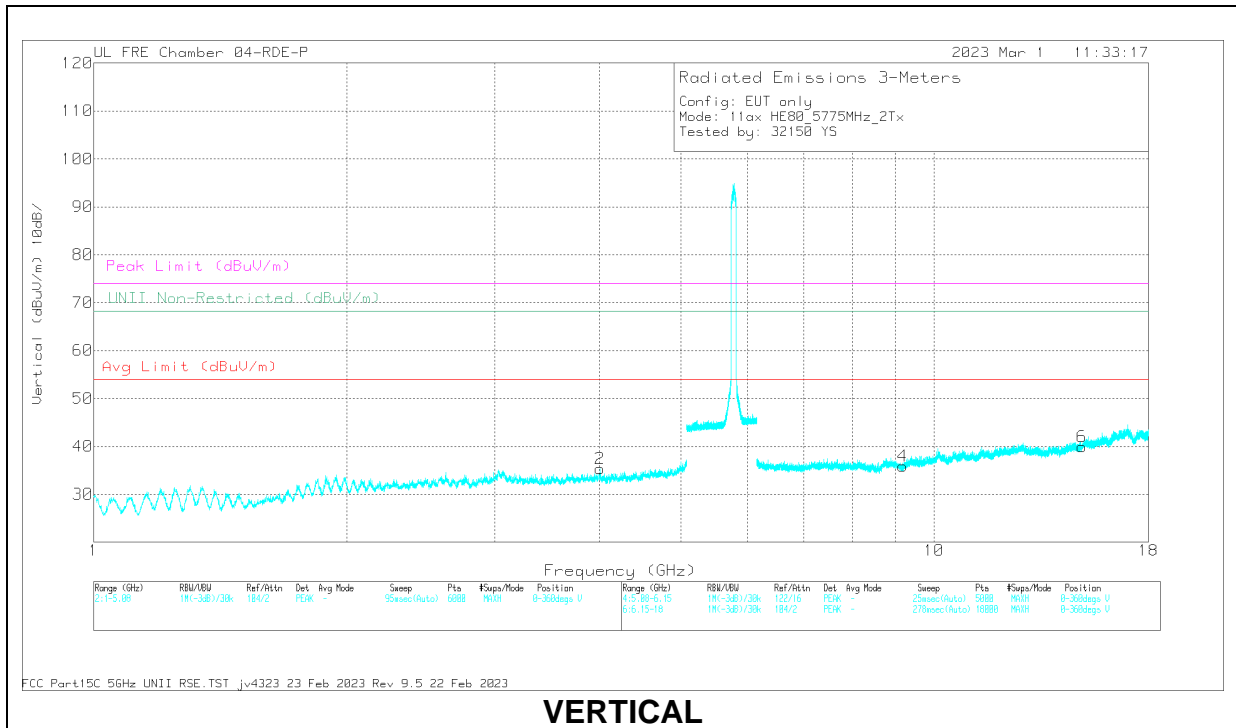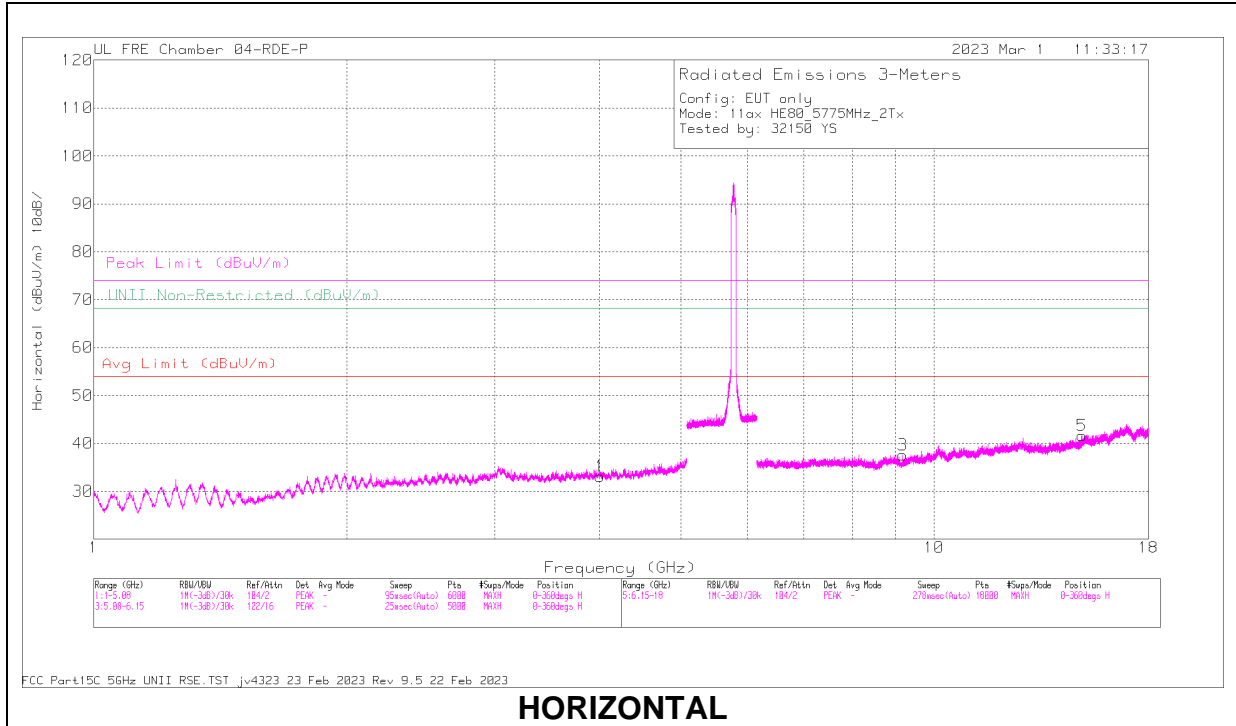



RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222740 ACF(dB) - 3mH	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*4.004422	56.87	PK-U	33.4	0	-46.12	44.15	-	-	74	-29.85	-	-	97	229	H
	*4.005006	45.17	ADR	33.4	21	-46.08	32.70	54	-21.30	-	-	-	-	97	229	H
2	*4.005618	56.87	PK-U	33.4	0	-46.09	44.18	-	-	74	-29.82	-	-	168	242	V
	*4.006424	45.19	ADR	33.4	21	-46.07	32.73	54	-21.27	-	-	-	-	168	242	V
3	*9.183368	53.77	PK-U	36.1	0	-43.43	46.44	-	-	74	-27.56	-	-	199	218	H
	*9.18544	42.05	ADR	36.1	21	-43.41	34.95	54	-19.05	-	-	-	-	199	218	H
4	*9.183066	53.43	PK-U	36.1	0	-43.43	46.1	-	-	74	-27.9	-	-	267	224	V
	*9.185371	41.95	ADR	36.1	21	-43.41	34.85	54	-19.15	-	-	-	-	267	224	V
5	15.0094	54	PK-U	39.6	0	-43.14	50.46	-	-	-	-	68.2	-17.74	221	192	V
6	15.012062	53.83	PK-U	39.6	0	-43.14	50.29	-	-	-	-	68.2	-17.91	267	203	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

1.2. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

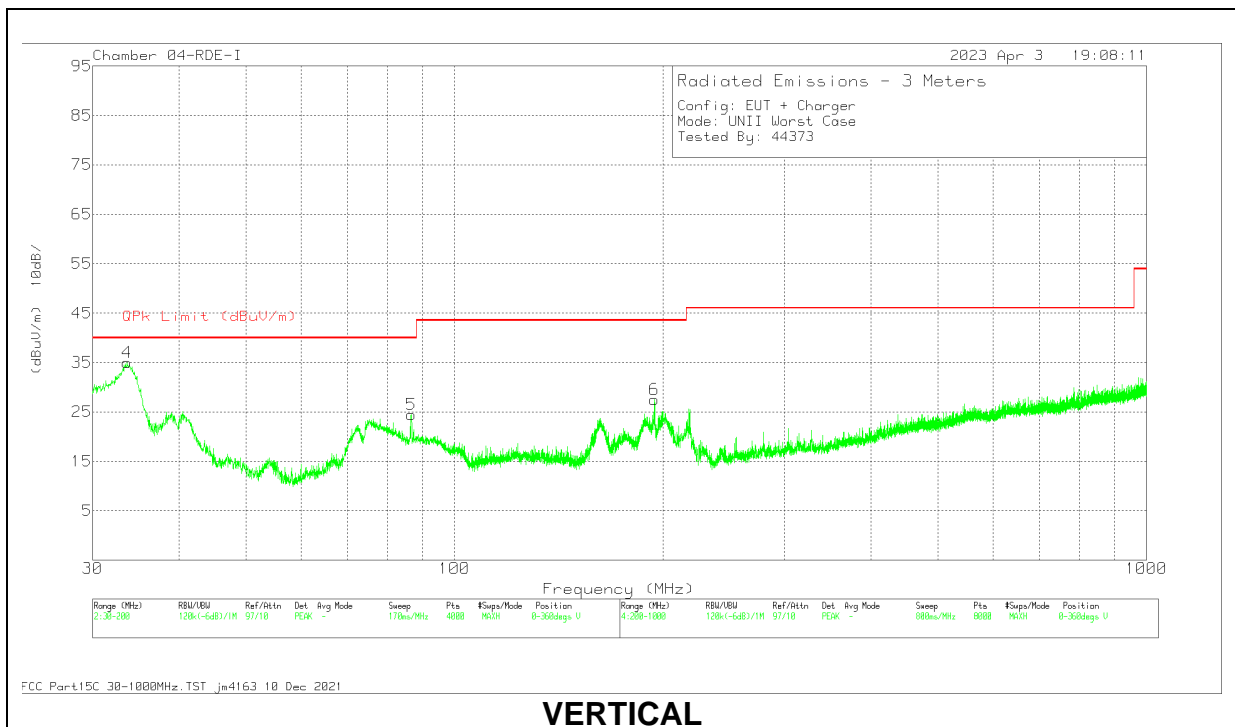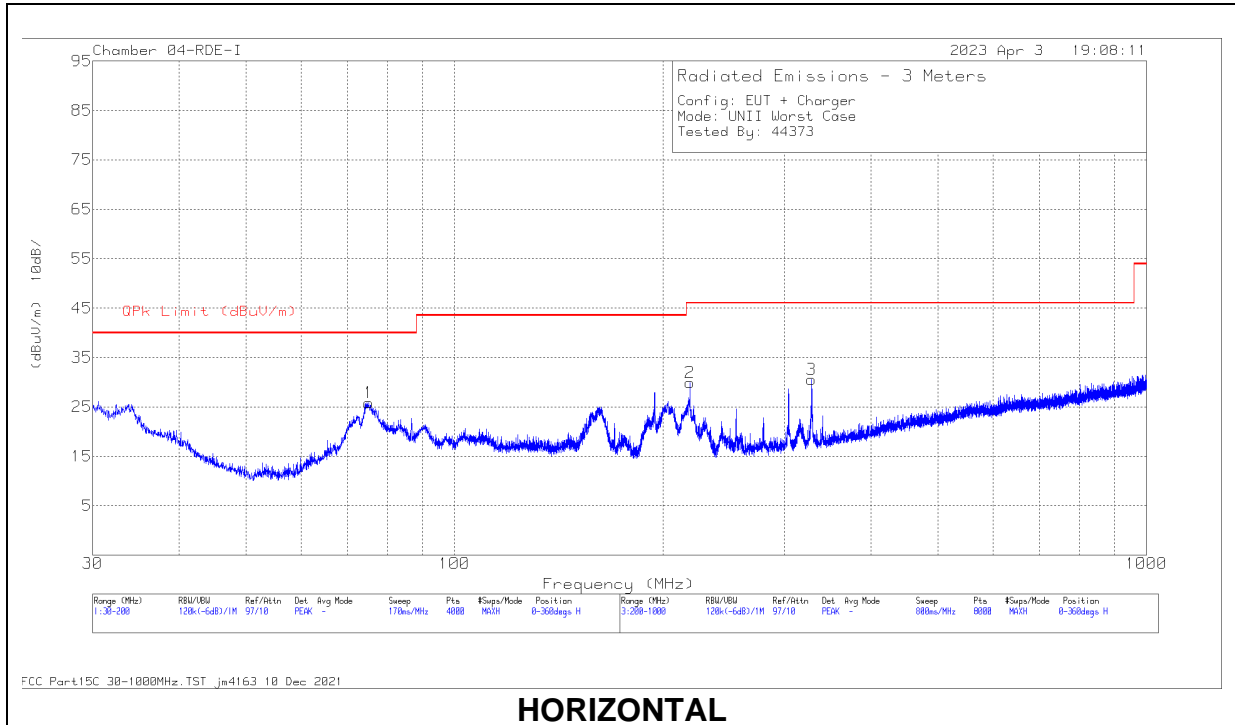



DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80714 ACF (dB) - 10mH	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	OPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 74.888	39.66	Op	14.5	-30.9	23.26	40	-16.74	23	290	H
4	34.0445	36.73	Op	24.8	-31.1	30.43	40	-9.57	350	132	V
5	86.583	38.49	Op	14	-30.7	21.79	40	-18.21	112	151	V
6	194.201	36.41	Op	17.9	-30	24.31	43.52	-19.21	244	113	V
2	218.335	40.47	Op	16.3	-30.1	26.67	46.02	-19.35	56	144	H
3	* 327.669	36.44	Op	19.7	-29.5	26.64	46.02	-19.38	22	103	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Op - Quasi-Peak detector

1.3. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

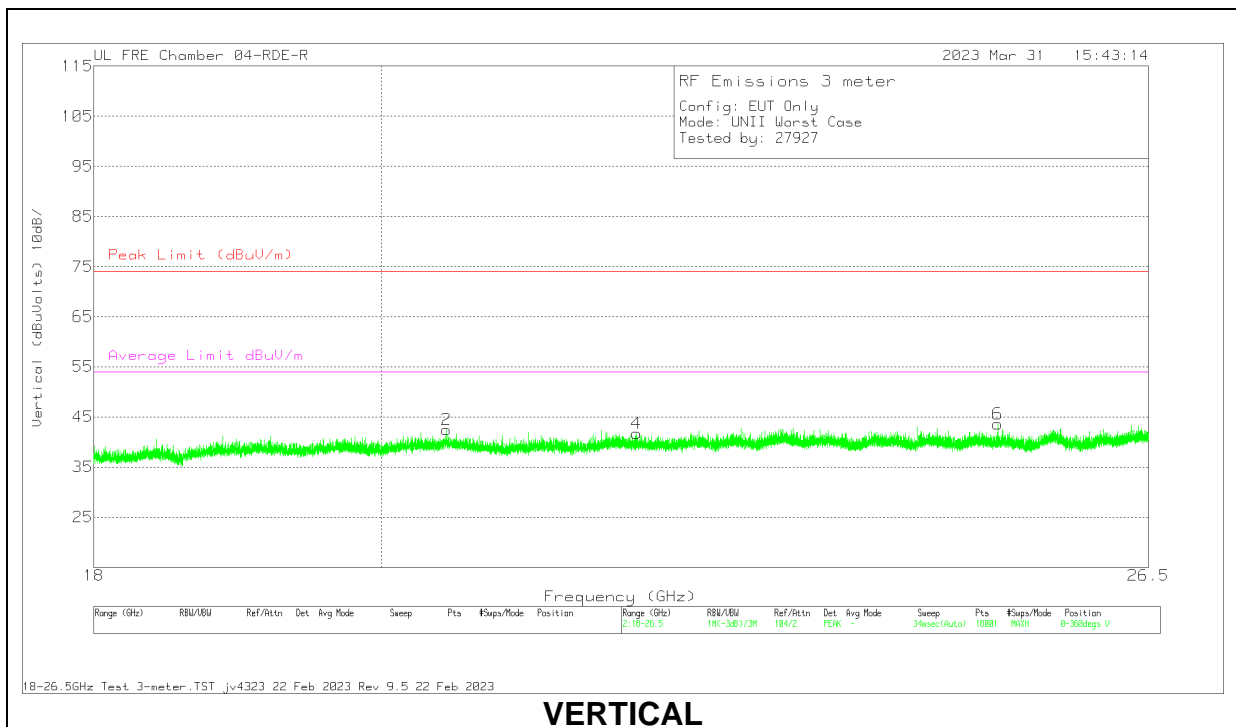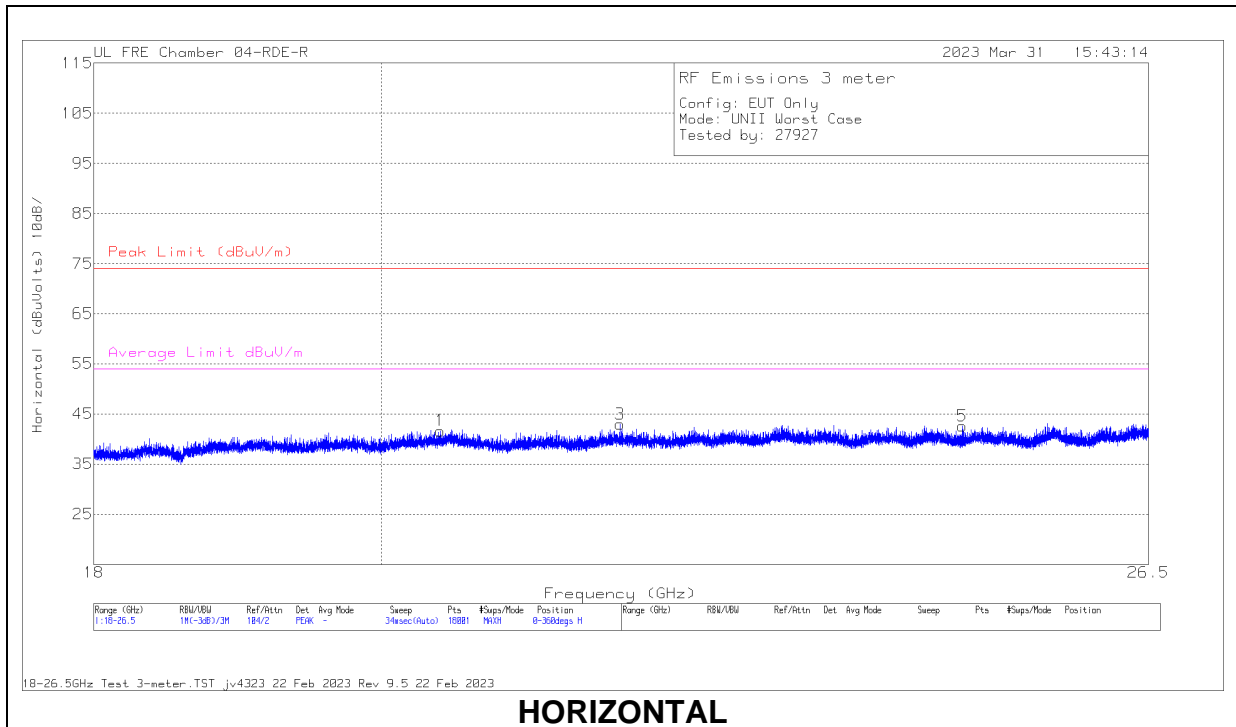



DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172353 ACF (dB) - 3mH	171583 Amp Assembly (dB)	Cables (dB)	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit dBuV/m	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 20.437138	56.06	Pk	33.4	-63.9	16.1	41.66	74	-32.34	54	-12.34	0-360	101	H
2	* 20.485777	56.83	Pk	33.4	-63.8	16	42.43	74	-31.57	54	-11.57	0-360	99	V
3	21.832082	57.64	Pk	33.7	-65	16.6	42.94	74	-31.06	54	-11.06	0-360	101	H
4	21.96572	56.74	Pk	33.7	-65.3	16.6	41.74	74	-32.26	54	-12.26	0-360	99	V
5	24.753719	54.77	Pk	34.5	-64.3	17.6	42.57	74	-31.43	54	-11.43	0-360	101	H
6	25.07483	55.47	Pk	34.6	-64.2	17.7	43.57	74	-30.43	54	-10.43	0-360	99	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

1.4. WORST CASE 26-40 GHz

SPURIOUS EMISSIONS 26-40 GHz (WORST-CASE CONFIGURATION)

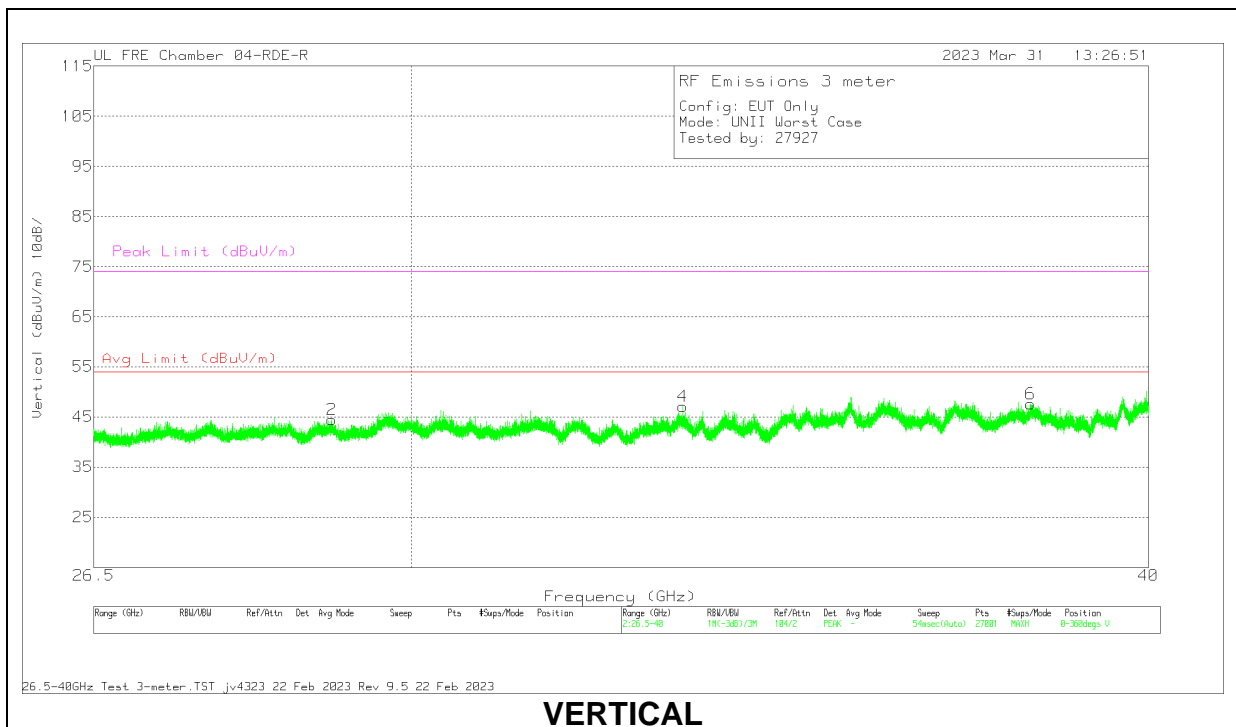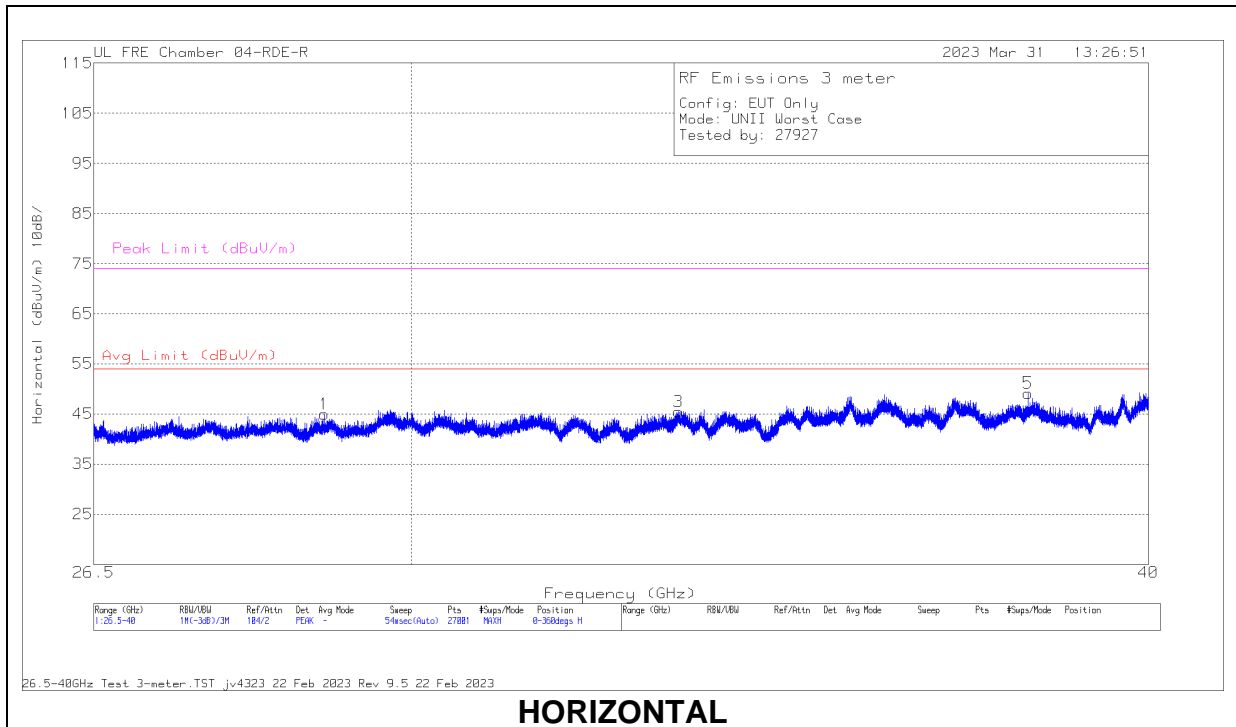

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172367 ACF (dB) - 3mH	172346 Amp Assembly (dB)	DCCF (dB)	Cables (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	28.99334	56.31	PK-U	36.4	-66.1	0	19.1	45.71	-	-	74	-28.29	360	200	H
	28.993745	44.53	ADR	36.4	-66.1	.18	19.1	33.93	54	-19.89	-	-	360	200	H
2	29.080084	56.32	PK-U	36.4	-65.6	0	19.2	46.32	-	-	74	-27.68	360	100	V
	29.079094	44.46	ADR	36.4	-65.6	.18	19.2	34.46	54	-19.36	-	-	360	100	V
3	33.289934	59.57	PK-U	37.2	-70.1	0	20.7	47.37	-	-	74	-26.63	360	200	H
	33.289205	47.91	ADR	37.2	-70.1	.18	20.7	35.71	54	-18.11	-	-	360	200	H
4	33.347268	59.31	PK-U	37.2	-70.4	0	20.7	46.81	-	-	74	-27.19	360	100	V
	33.349404	47.54	ADR	37.2	-70.4	.18	20.7	35.04	54	-18.78	-	-	360	100	V
5	38.16514	57.51	PK-U	38.5	-70.3	0	22.5	48.21	-	-	74	-25.79	360	200	H
	38.166282	45.9	ADR	38.5	-70.3	.18	22.5	36.6	54	-17.22	-	-	360	200	H
6	38.203467	58.83	PK-U	38.5	-70.2	0	22.5	49.63	-	-	74	-24.37	360	100	V
	38.203248	46.28	ADR	38.5	-70.2	.18	22.5	37.08	54	-16.74	-	-	360	100	V

PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

2. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

2.1. AC POWER LINE WITH LAPTOP


LINE 1 RESULTS

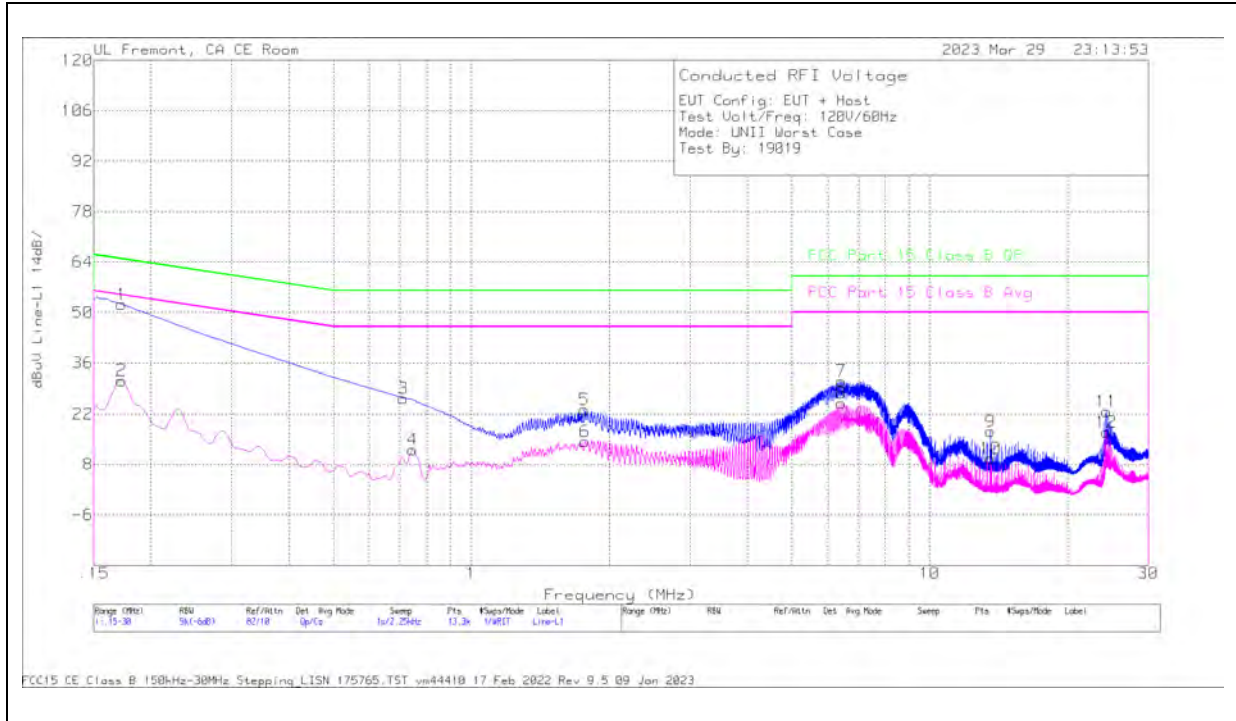

Range 1: Line-L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	L1_LISN.csv dB	C1&C3 cable path loss dB	207996 Limiter with short cabl dB	Corrected Reading dBuV	FCC Part 15 Class B QP dBuV	QP Margin (dB)	FCC Part 15 Class B Avg dBuV	Av(CISPR)Margin (dB)	
2	.1725	21.85	Ca	0	0	9.4	31.25	-	-	54.84	-23.59	
4	.744	2.74	Ca	0	.1	9.3	12.14	-	-	46	-33.86	
6	1.7723	5	Ca	0	.1	9.3	14.4	-	-	46	-31.6	
8	6.4163	15.5	Ca	0	.1	9.3	24.9	-	-	50	-25.1	
10	13.56	.1	Ca	.1	.2	9.3	9.7	-	-	50	-40.3	
12	24.297	7.06	Ca	.2	.3	9.4	16.96	-	-	50	-33.04	
1	.1725	42.79	Qp	0	0	9.4	52.19	64.84	-12.65	-	-	
3	.7103	17.02	Qp	0	.1	9.3	26.42	56	-29.58	-	-	
5	1.7655	13.75	Qp	0	.1	9.3	23.15	56	-32.85	-	-	
7	6.414	21.72	Qp	0	.1	9.3	31.12	60	-28.88	-	-	
9	13.56	7.49	Qp	.1	.2	9.3	17.09	60	-42.91	-	-	
11	24.297	12.88	Qp	.2	.3	9.4	22.78	60	-37.22	-	-	

Qp - Quasi-Peak detector
 Ca - CISPR average detection

LINE 2 RESULTS

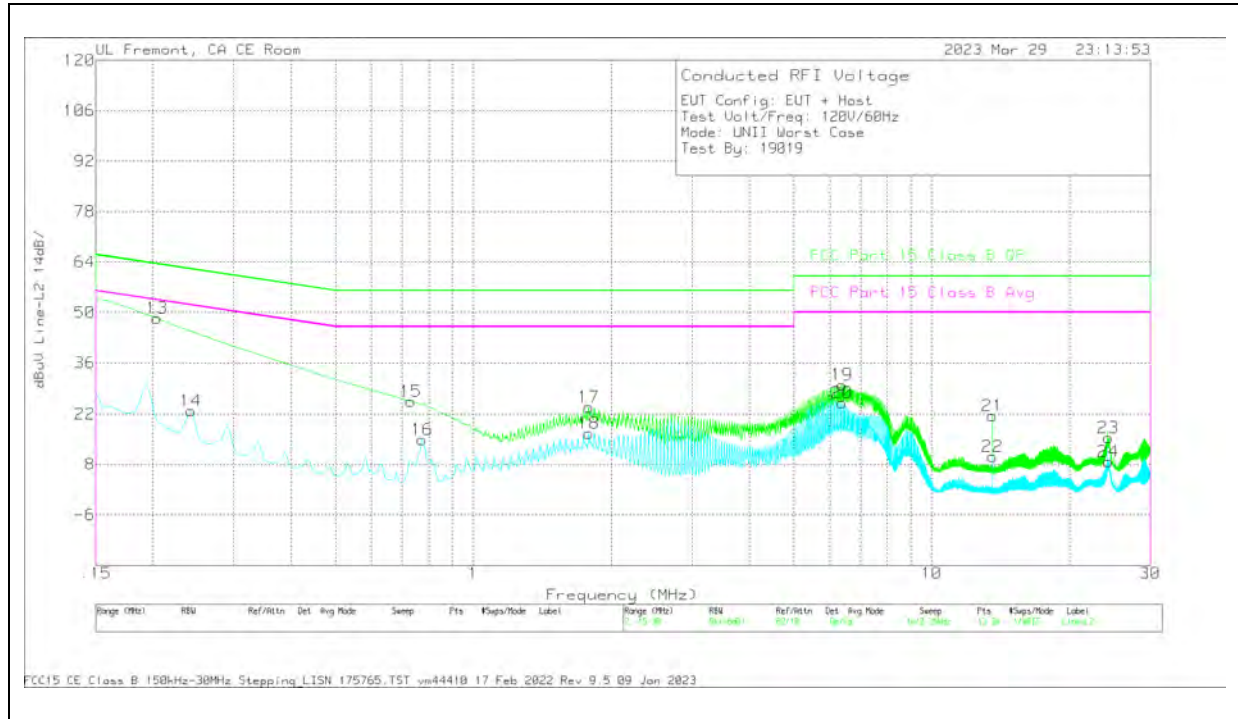


Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	L2_LISN dB	C2&C3 cable path loss dB	207996 Limiter with short cabl dB	Corrected Reading dBuV	FCC Part 15 Class B QP dBuV	QP Margin (dB)	FCC Part 15 Class B Avg dBuV	Av(CISPR)Margin (dB)
14	.2423	13.62	Ca	0	0	9.3	22.92	-	-	52.02	-29.1
16	.7733	5.52	Ca	0	.1	9.3	14.92	-	-	46	-31.08
18	1.7858	7.3	Ca	0	.1	9.3	16.7	-	-	46	-29.3
20	6.3735	15.68	Ca	0	.1	9.3	25.08	-	-	50	-24.92
22	13.56	.67	Ca	.1	.2	9.3	10.27	-	-	50	-39.73
24	24.315	-1.12	Ca	.2	.3	9.4	8.78	-	-	50	-41.22
13	.204	38.97	Qp	0	0	9.4	48.37	63.45	-15.08	-	-
15	.7305	16.12	Qp	0	.1	9.3	25.52	56	-30.48	-	-
17	1.7858	14.55	Qp	0	.1	9.3	23.95	56	-32.05	-	-
19	6.378	20.53	Qp	0	.1	9.3	29.93	60	-30.07	-	-
21	13.56	11.87	Qp	.1	.2	9.3	21.47	60	-38.53	-	-
23	24.3173	5.43	Qp	.2	.3	9.4	15.33	60	-44.67	-	-

Qp - Quasi-Peak detector
 Ca - CISPR average detection

2.2. AC POWER LINE NORM WITH AC ADAPTER


LINE 1 RESULTS

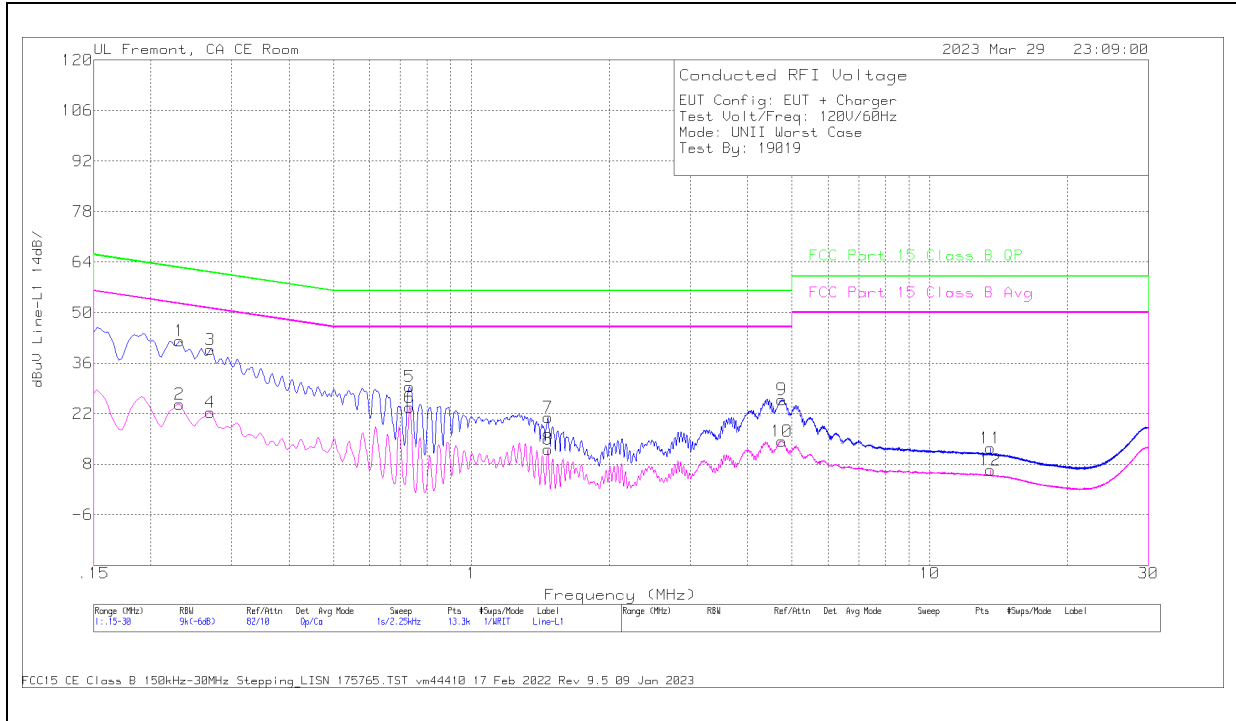

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	L1_LISN.csv dB	C1&C3 cable path loss dB	207996 Limiter with short cabl dB	Corrected Reading dBuV	FCC Part 15 Class B QP dBuV	QP Margin (dB)	FCC Part 15 Class B Avg dBuV	Av(CISPR)Margin (dB)
2	.231	15.3	Ca	0	0	9.3	24.6	-	-	52.41	-27.81
4	.2693	12.99	Ca	0	0	9.3	22.29	-	-	51.14	-28.85
6	.7328	14.42	Ca	0	.1	9.3	23.82	-	-	46	-22.18
8	1.4685	2.79	Ca	0	.1	9.3	12.19	-	-	46	-33.81
10	4.7535	5.02	Ca	0	.1	9.3	14.42	-	-	46	-31.58
12	13.56	-3.16	Ca	.1	.2	9.3	6.44	-	-	50	-43.56
1	.231	32.89	Qp	0	0	9.3	42.19	62.41	-20.22	-	-
3	.2693	30.48	Qp	0	0	9.3	39.78	61.14	-21.36	-	-
5	.7328	20.09	Qp	0	.1	9.3	29.49	56	-26.51	-	-
7	1.4685	11.52	Qp	0	.1	9.3	20.92	56	-35.08	-	-
9	4.7625	16.52	Qp	0	.1	9.3	25.92	56	-30.08	-	-
11	13.56	2.78	Qp	.1	.2	9.3	12.38	60	-47.62	-	-

Qp - Quasi-Peak detector
 Ca - CISPR average detection

LINE 2 RESULTS

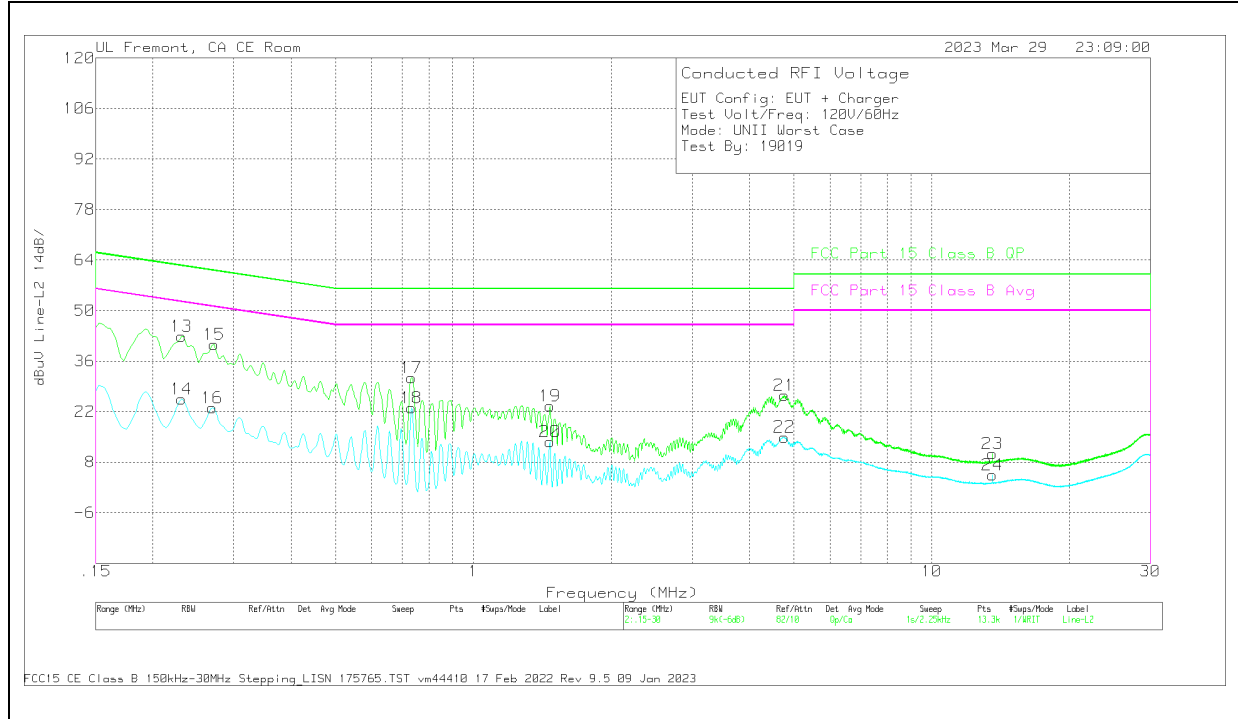

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	L2_LISN dB	C2&C3 cable path loss	207996 Limiter with short cabl dB	Corrected Reading dBuV	FCC Part 15 Class B QP dBuV	QP Margin (dB)	FCC Part 15 Class B Avg dBuV	Av(CISPR)Margin (dB)
14	.231	16.22	Ca	0	0	9.3	25.52	-	-	52.41	-26.89
16	.2693	13.82	Ca	0	0	9.3	23.12	-	-	51.14	-28.02
18	.7328	13.59	Ca	0	.1	9.3	22.99	-	-	46	-23.01
20	1.4685	4.28	Ca	0	.1	9.3	13.68	-	-	46	-32.32
22	4.7648	5.57	Ca	0	.1	9.3	14.97	-	-	46	-31.03
24	13.56	-5.17	Ca	.1	.2	9.3	4.43	-	-	50	-45.57
13	.231	33.65	Qp	0	0	9.3	42.95	62.41	-19.46	-	-
15	.2715	31.28	Qp	0	0	9.3	40.58	61.07	-20.49	-	-
17	.7328	22.05	Qp	0	.1	9.3	31.45	56	-24.55	-	-
19	1.4685	14.21	Qp	0	.1	9.3	23.61	56	-32.39	-	-
21	4.7738	17.09	Qp	0	.1	9.3	26.49	56	-29.51	-	-
23	13.56	.76	Qp	.1	.2	9.3	10.36	60	-49.64	-	-

Qp - Quasi-Peak detector
Ca - CISPR average detection

3. SETUP PHOTOS

Please refer to 14523744-EP1V1-EP1V1 for setup photos

END OF TEST REPORT