


VERTICAL RESULT

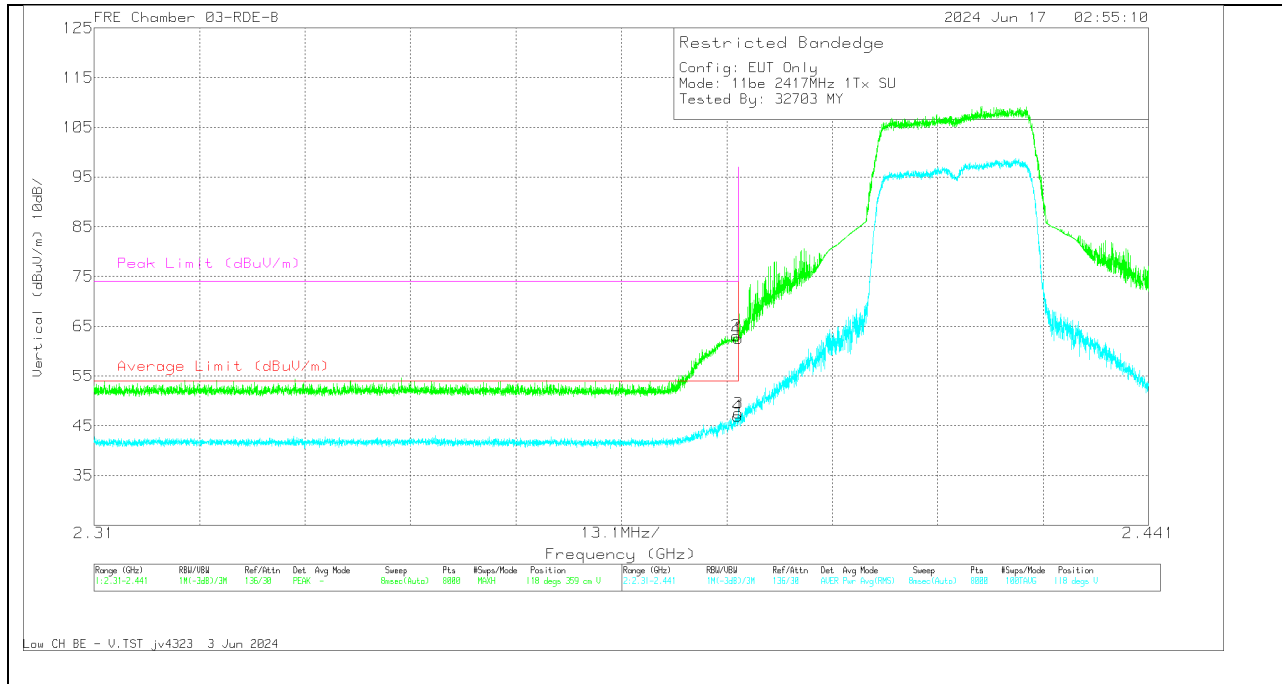


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.389822	72.34	Pk	32.2	0	-41.5	63.04	-	-	74	-10.96	118	359	V
4	2.389953	55.76	RMS	32.2	.48	-41.5	46.94	54	-7.06	-	-	118	359	V
1	2.39	71.83	Pk	32.2	0	-41.5	62.53	-	-	74	-11.47	118	359	V
3	2.39	56.32	RMS	32.2	.48	-41.5	47.5	54	-6.5	-	-	118	359	V

Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

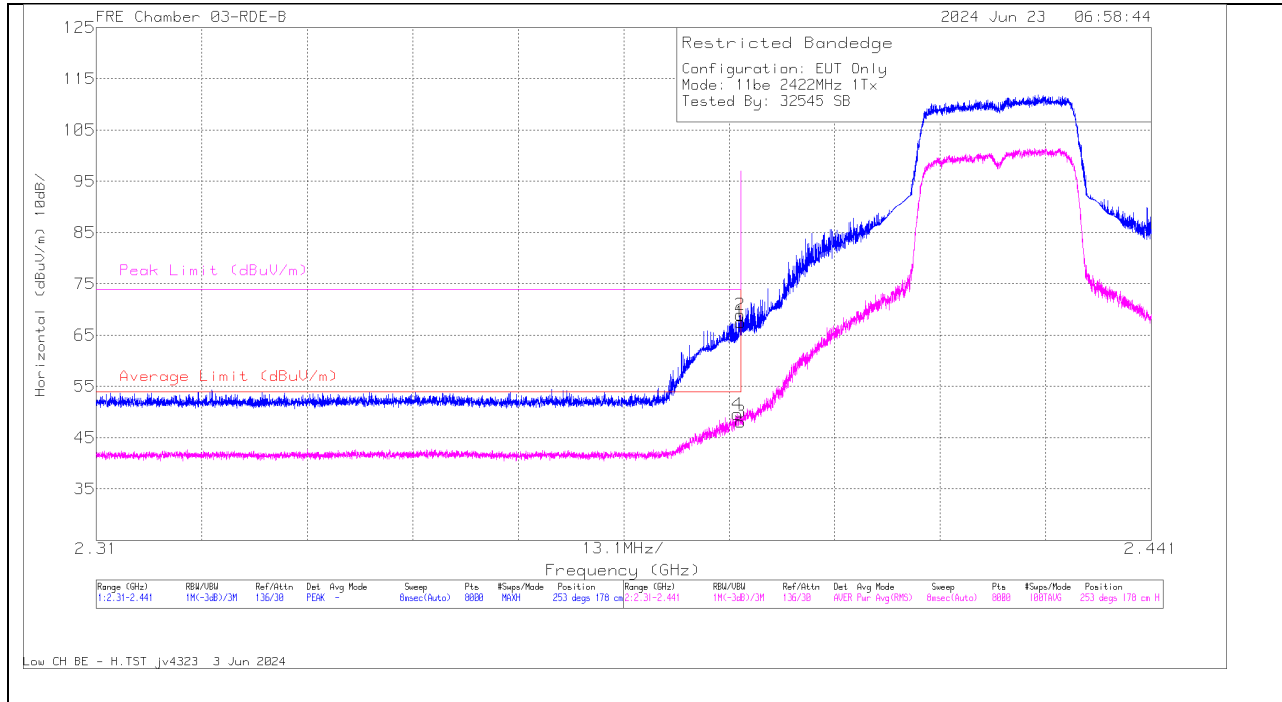

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	76.81	Pk	32.2	0	-41.5	67.51	-	-	74	-6.49	253	178	H
2	* 2.389985	78.27	Pk	32.2	0	-41.5	68.97	-	-	74	-5.03	253	178	H
3	* 2.39	56.9	RMS	32.2	.48	-41.5	48.08	54	-5.92	-	-	253	178	H
4	* 2.389609	58.41	RMS	32.2	.48	-41.5	49.59	54	-4.41	-	-	253	178	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

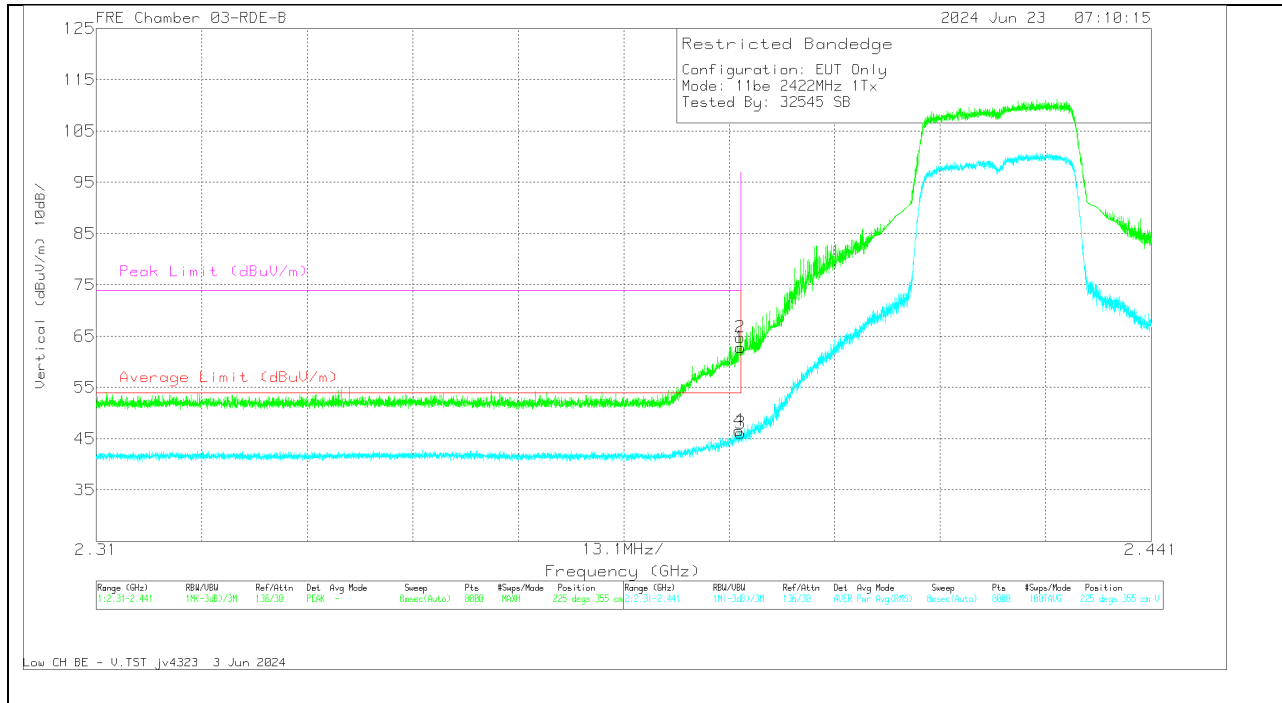


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	72.09	Pk	32.2	0	-41.5	62.79	-	-	74	-11.21	225	355	V
2	* 2.389985	74.08	Pk	32.2	0	-41.5	64.78	-	-	74	-9.22	225	355	V
3	* 2.39	54.92	RMS	32.2	.48	-41.5	46.1	54	-7.9	-	-	225	355	V
4	* 2.389822	55.4	RMS	32.2	.48	-41.5	46.58	54	-7.42	-	-	225	355	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

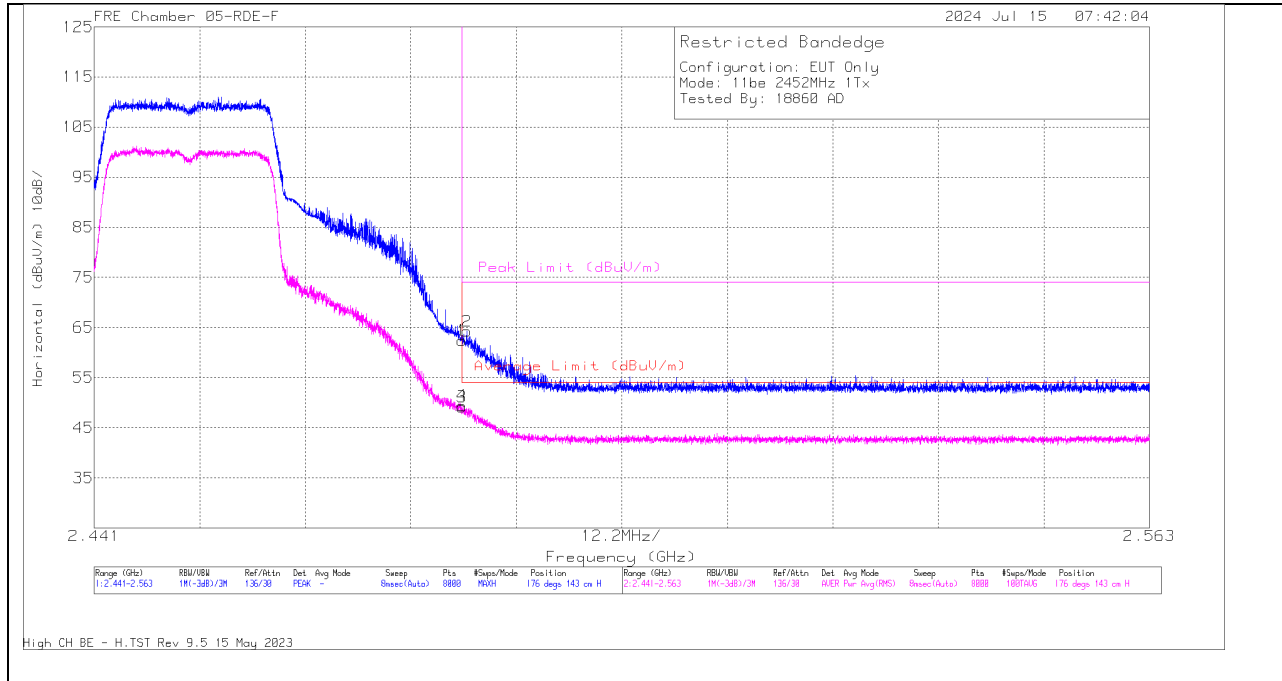


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	70.76	Pk	32.2	0	-40.57	62.39	-	-	74	-11.61	176	143	H
2	2.484072	72.61	Pk	32.2	0	-40.57	64.24	-	-	74	-9.76	176	143	H
3	2.4835	57.04	RMS	32.2	.48	-40.57	49.15	54	-4.85	-	-	176	143	H
4	2.483523	57.27	RMS	32.2	.48	-40.57	49.38	54	-4.62	-	-	176	143	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

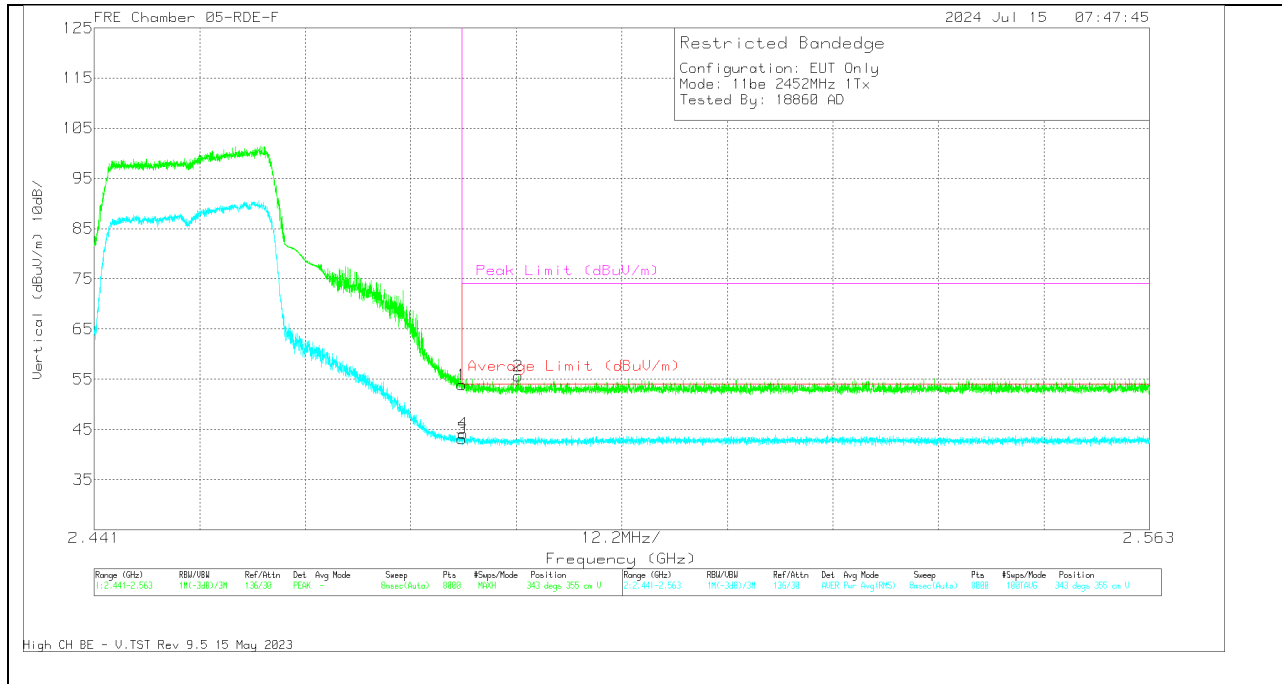


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	62.23	Pk	32.2	0	-40.57	53.86	-	-	74	-20.14	343	355	V
2	2.490035	63.9	Pk	32.2	0	-40.5	55.6	-	-	74	-18.4	343	355	V
3	2.4835	51.02	RMS	32.2	.48	-40.57	43.13	54	-10.87	-	-	343	355	V
4	2.48366	52.02	RMS	32.2	.48	-40.57	44.13	54	-9.87	-	-	343	355	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

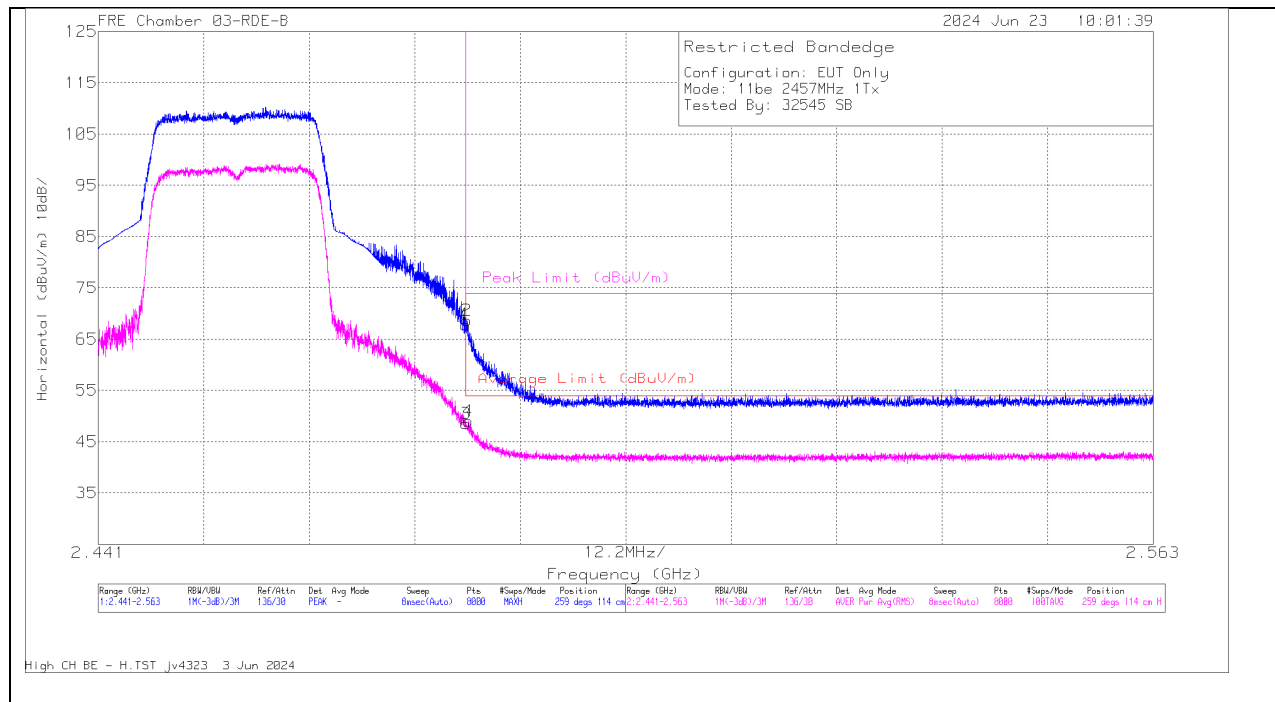


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	77.14	Pk	32.2	0	-41.5	67.84	-	-	74	-6.16	259	114	H
2	* 2.483599	77.95	Pk	32.2	0	-41.5	68.65	-	-	74	-5.35	259	114	H
3	* 2.4835	57.34	RMS	32.2	.48	-41.5	48.52	54	-5.48	-	-	259	114	H
4	* 2.483782	57.81	RMS	32.2	.48	-41.5	48.99	54	-5.01	-	-	259	114	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

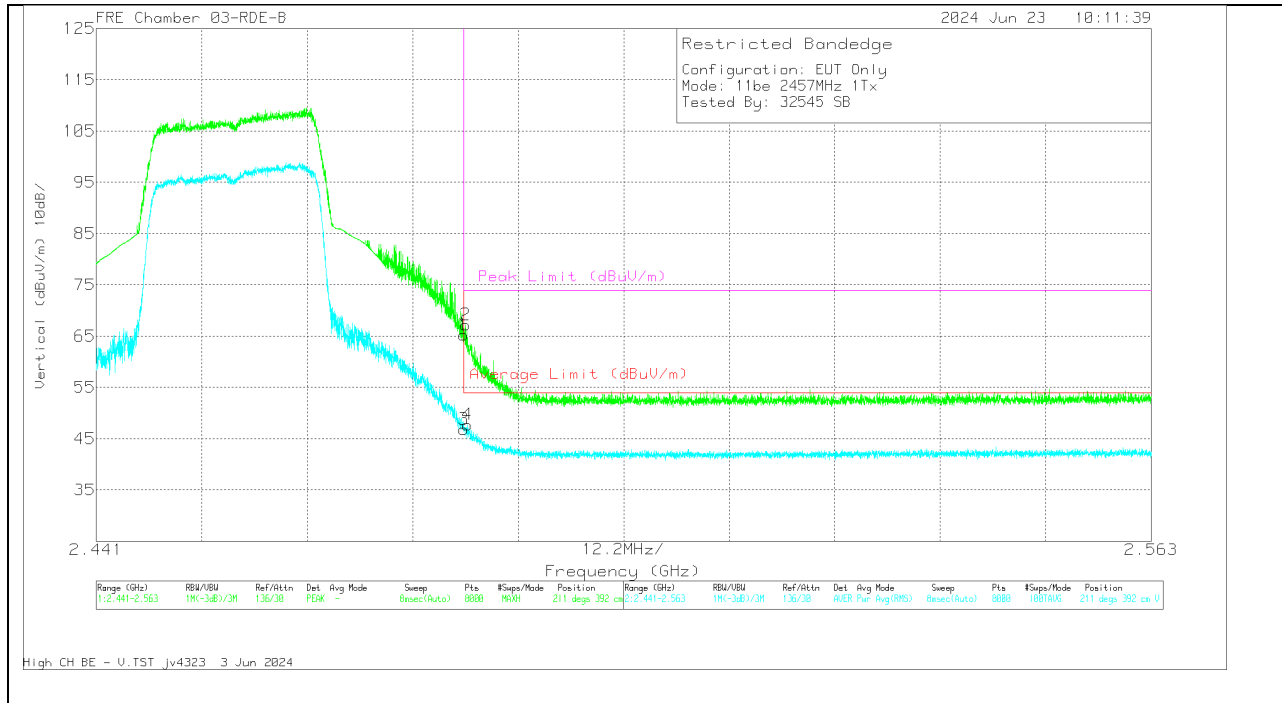


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.51	Pk	32.2	0	-41.5	65.21	-	-	74	-8.79	211	392	V
2	* 2.48369	76.5	Pk	32.2	0	-41.5	67.2	-	-	74	-6.8	211	392	V
3	* 2.4835	55.66	RMS	32.2	.48	-41.5	46.84	54	-7.16	-	-	211	392	V
4	* 2.483919	56.55	RMS	32.2	.48	-41.5	47.73	54	-6.27	-	-	211	392	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

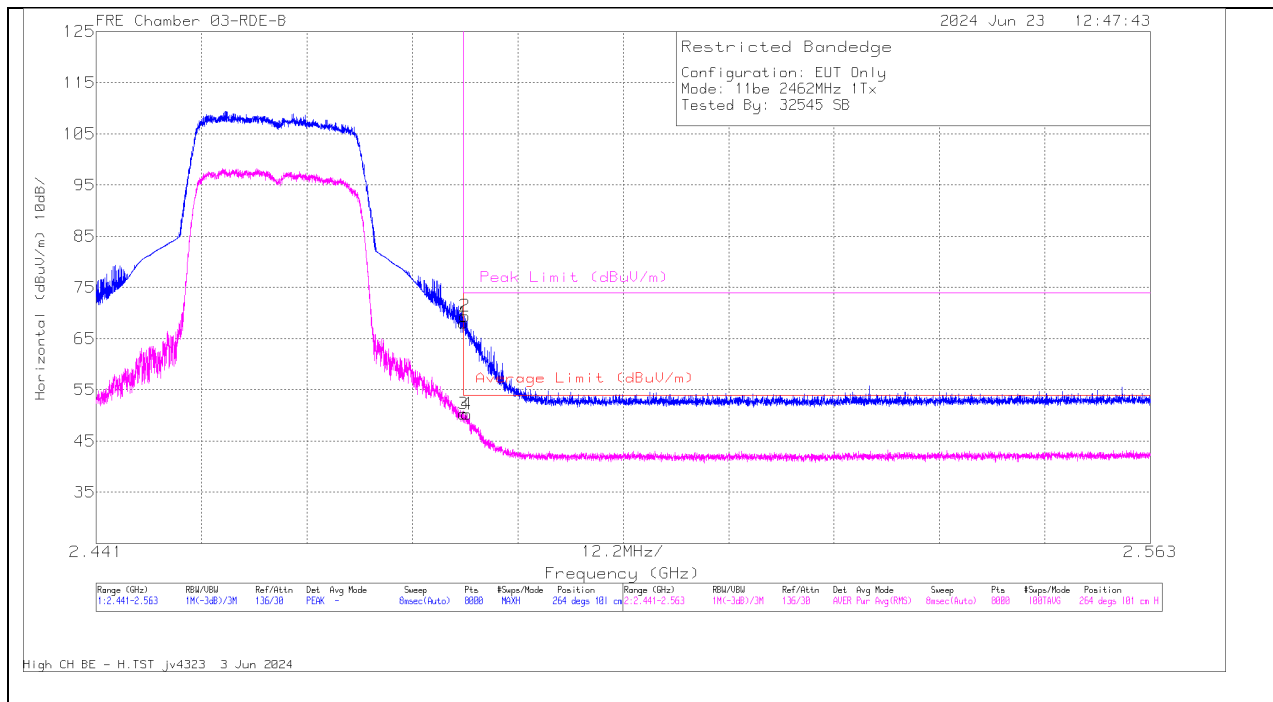

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	77.36	Pk	32.2	0	-41.5	68.06	-	-	74	-5.94	264	101	H
2	* 2.483675	78.74	Pk	32.2	0	-41.5	69.44	-	-	74	-4.56	264	101	H
3	* 2.4835	59.15	RMS	32.2	.48	-41.5	50.33	54	-3.67	-	-	264	101	H
4	* 2.483904	59.08	RMS	32.2	.48	-41.5	50.26	54	-3.74	-	-	264	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

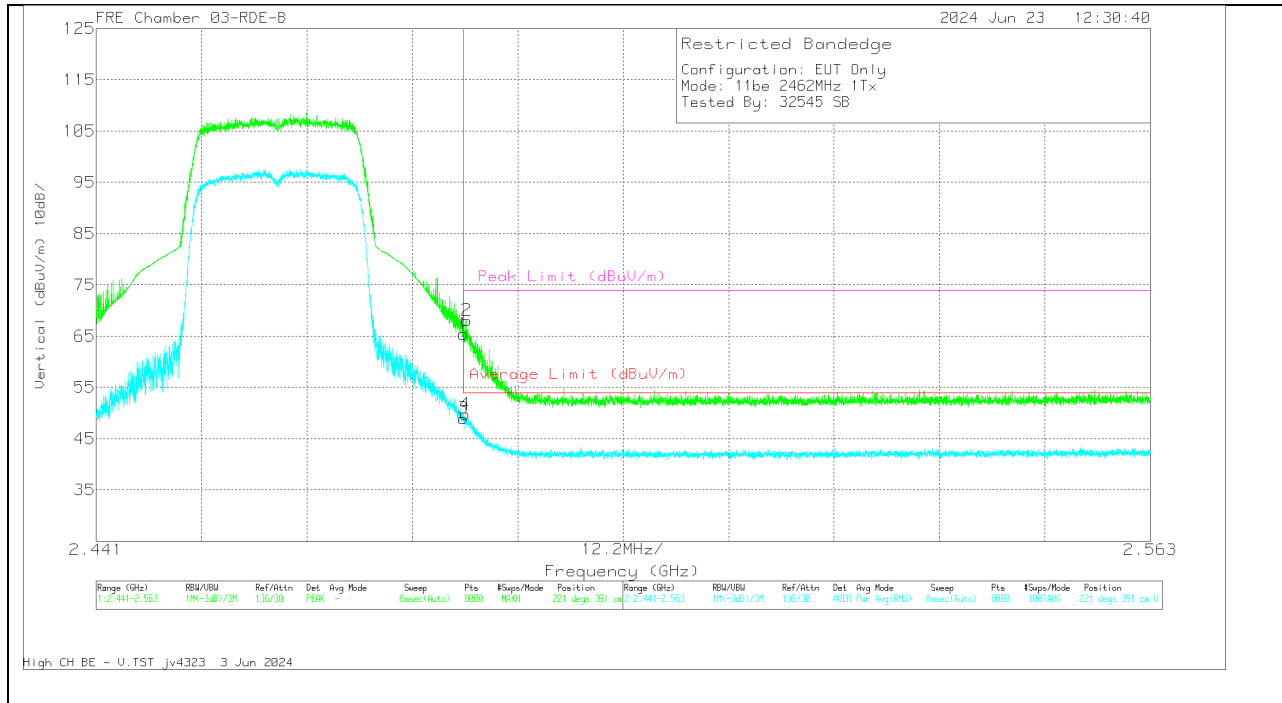


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.72	Pk	32.2	0	-41.5	65.42	-	-	74	-8.58	221	391	V
2	* 2.483889	77.37	Pk	32.2	0	-41.5	68.07	-	-	74	-5.93	221	391	V
3	* 2.4835	57.78	RMS	32.2	.48	-41.5	48.96	54	-5.04	-	-	221	391	V
4	* 2.483736	58.59	RMS	32.2	.48	-41.5	49.77	54	-4.23	-	-	221	391	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

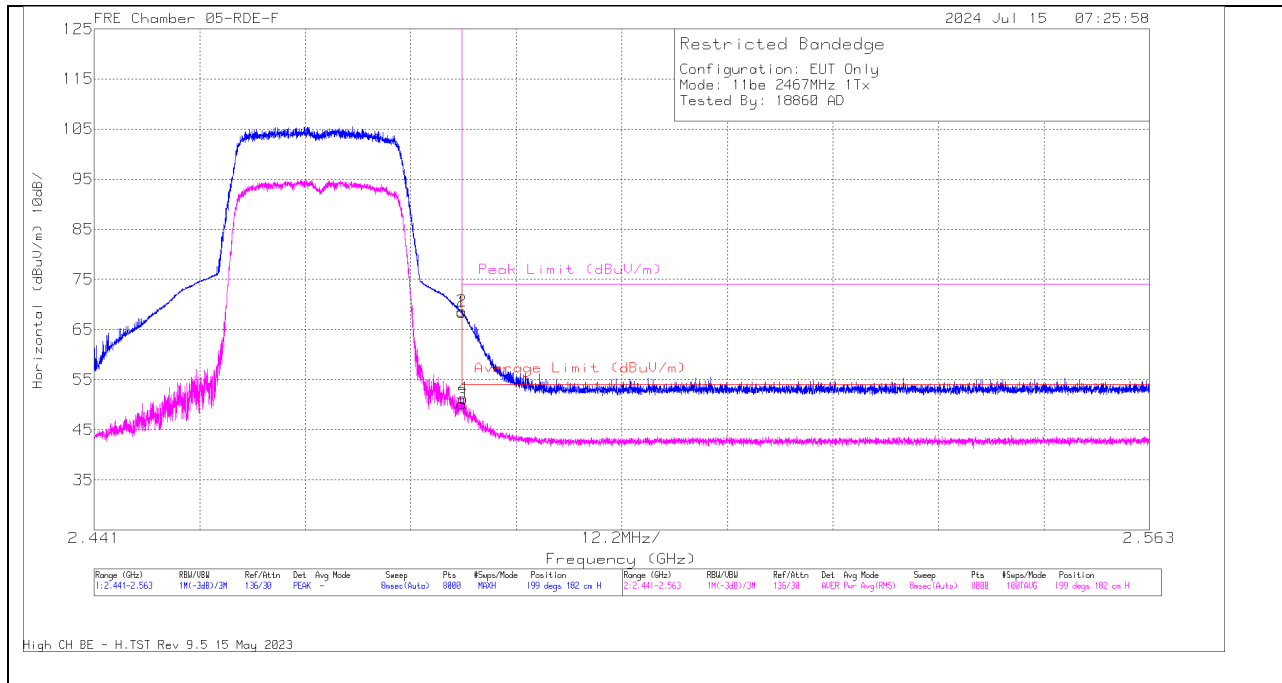

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	76.77	Pk	32.2	0	-40.57	68.4	-	-	74	-5.6	199	182	H
2	2.483523	77.01	Pk	32.2	0	-40.57	68.64	-	-	74	-5.36	199	182	H
3	2.4835	58.09	RMS	32.2	.48	-40.57	50.2	54	-3.8	-	-	199	182	H
4	2.483645	59.13	RMS	32.2	.48	-40.57	51.24	54	-2.76	-	-	199	182	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

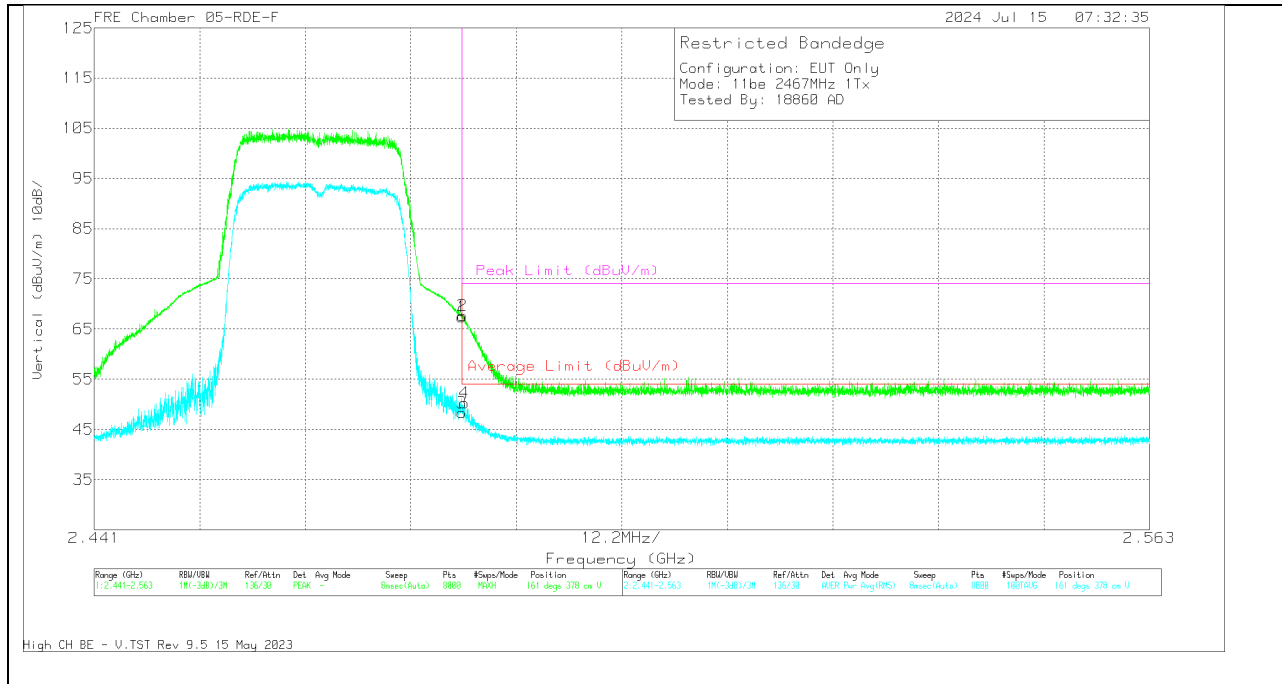


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4835	75.8	Pk	32.2	0	-40.57	67.43	-	-	74	-6.57	161	378	V
2	2.483568	76.05	Pk	32.2	0	-40.57	67.68	-	-	74	-6.32	161	378	V
3	2.4835	56.22	RMS	32.2	.48	-40.57	48.33	54	-5.67	-	-	161	378	V
4	2.483812	58.17	RMS	32.2	.48	-40.57	50.28	54	-3.72	-	-	161	378	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

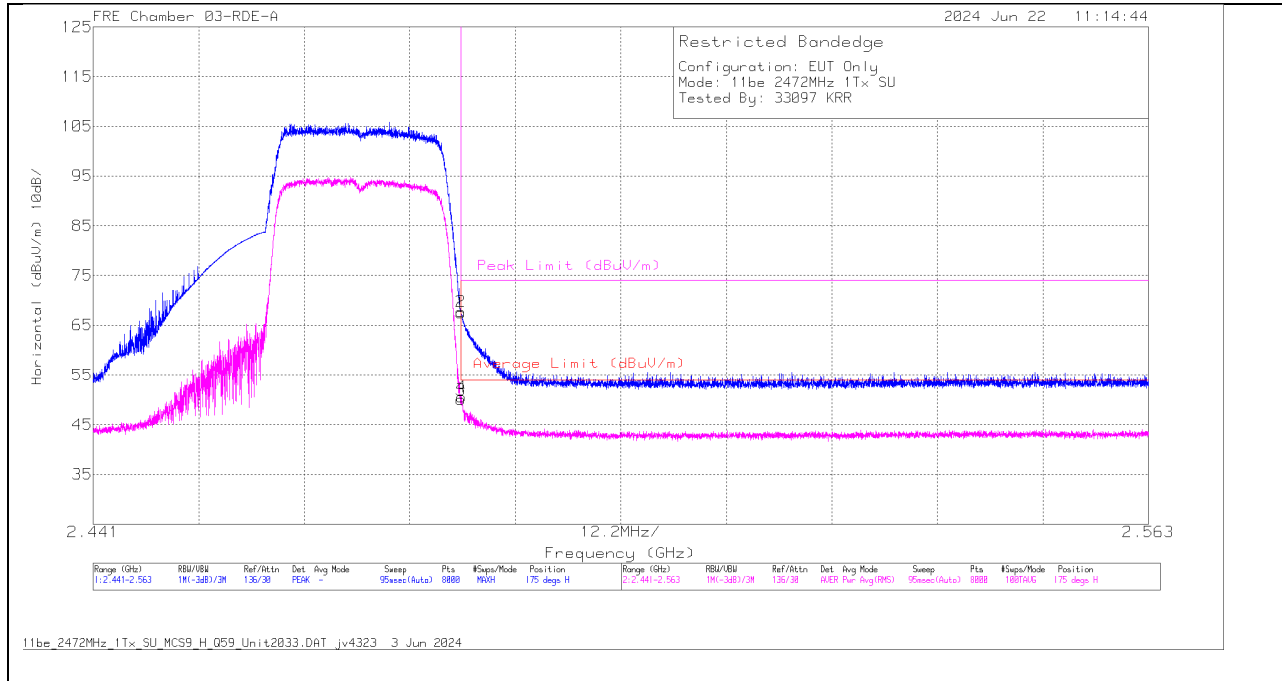

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.08	PK	32.2	0	-39.84	67.44	-	-	74	-6.56	175	149	H
2	* 2.483523	75.33	PK	32.2	0	-39.83	67.7	-	-	74	-6.3	175	149	H
3	* 2.4835	57.17	RMS	32.2	.48	-39.84	50.01	54	-3.99	-	-	175	149	H
4	* 2.483553	57.69	RMS	32.2	.48	-39.83	50.54	54	-3.46	-	-	175	149	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

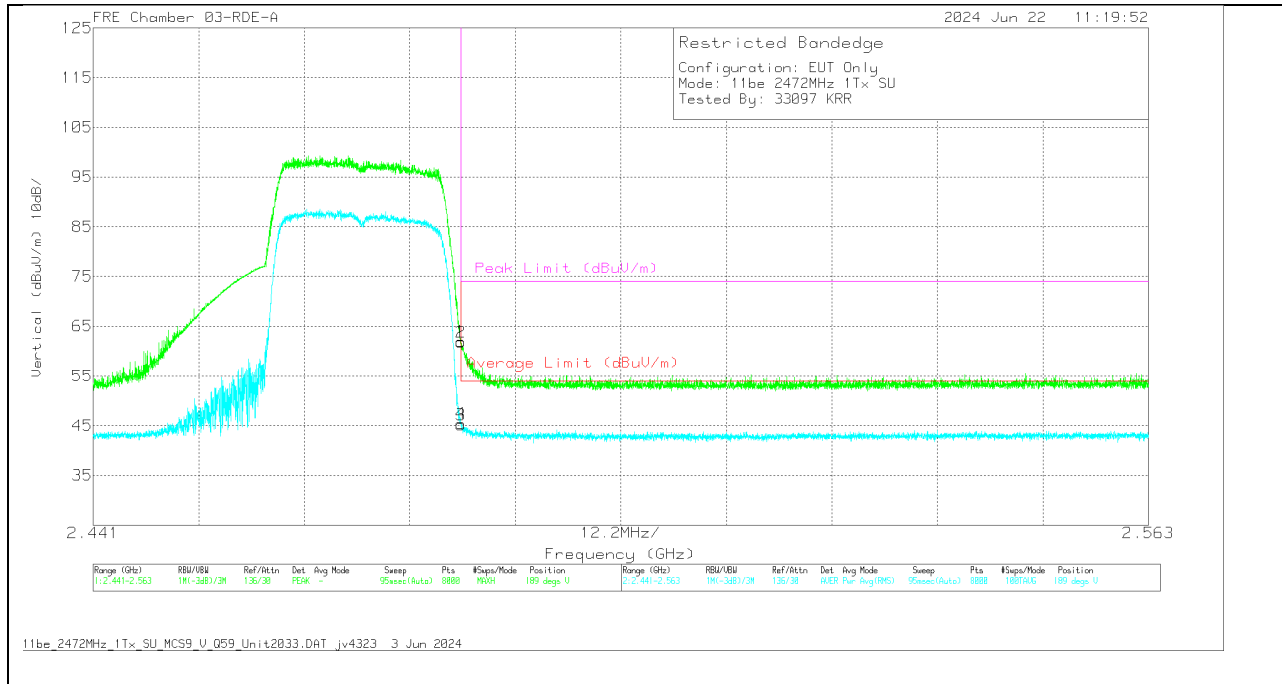


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	69.58	Pk	32.2	0	-39.84	61.94	-	-	74	-12.06	189	325	V
2	* 2.483507	69.39	Pk	32.2	0	-39.83	61.76	-	-	74	-12.24	189	325	V
3	* 2.4835	52.31	RMS	32.2	.48	-39.84	45.15	54	-8.85	-	-	189	325	V
4	* 2.483523	52.52	RMS	32.2	.48	-39.83	45.37	54	-8.63	-	-	189	325	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

1TX ANT 3 MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

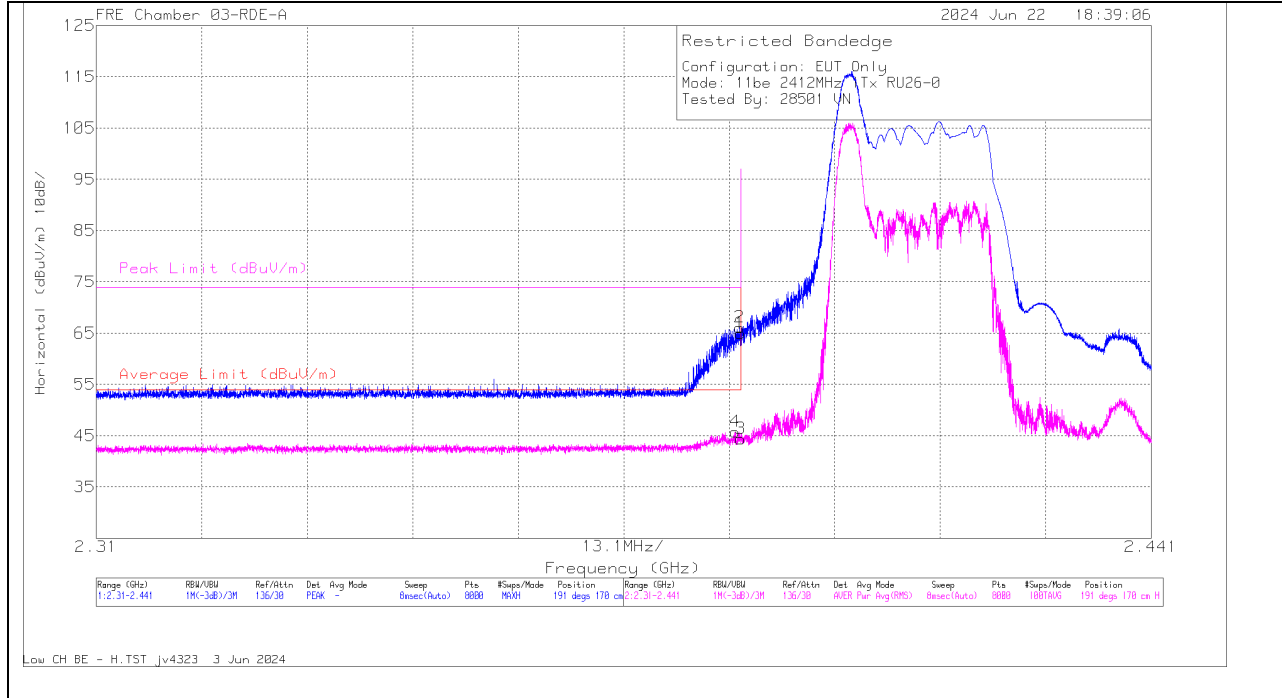

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	72.99	Pk	32.1	0	-40.07	65.02	-	-	74	-8.98	191	170	H
2	* 2.389871	74.1	Pk	32.1	0	-40.07	66.13	-	-	74	-7.87	191	170	H
3	* 2.39	51.78	RMS	32.1	.6	-40.07	44.41	54	-9.59	-	-	191	170	H
4	* 2.389314	53.12	RMS	32.1	.6	-40.06	45.76	54	-8.24	-	-	191	170	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

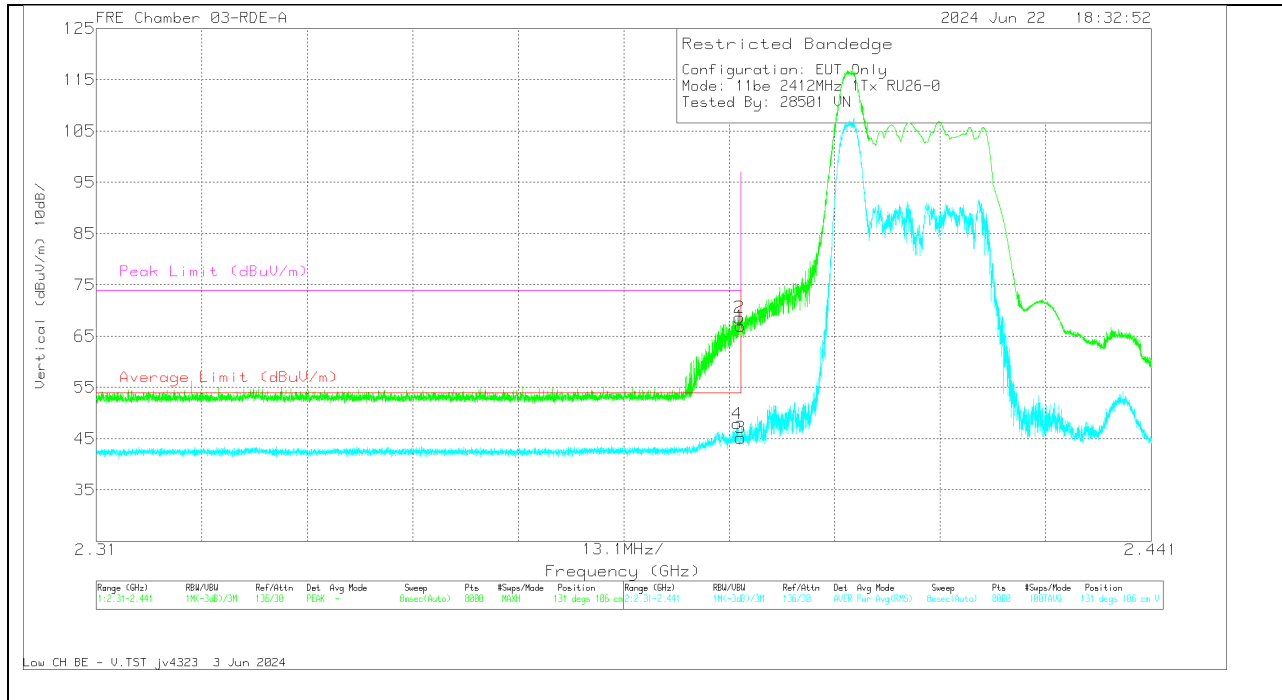


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	74.91	Pk	32.1	0	-40.07	66.94	-	-	74	-7.06	131	106	V
2	* 2.389838	76.59	Pk	32.1	0	-40.07	68.62	-	-	74	-5.38	131	106	V
3	* 2.39	52.55	RMS	32.1	.6	-40.07	45.18	54	-8.82	-	-	131	106	V
4	* 2.389576	55.28	RMS	32.1	.6	-40.06	47.92	54	-6.08	-	-	131	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

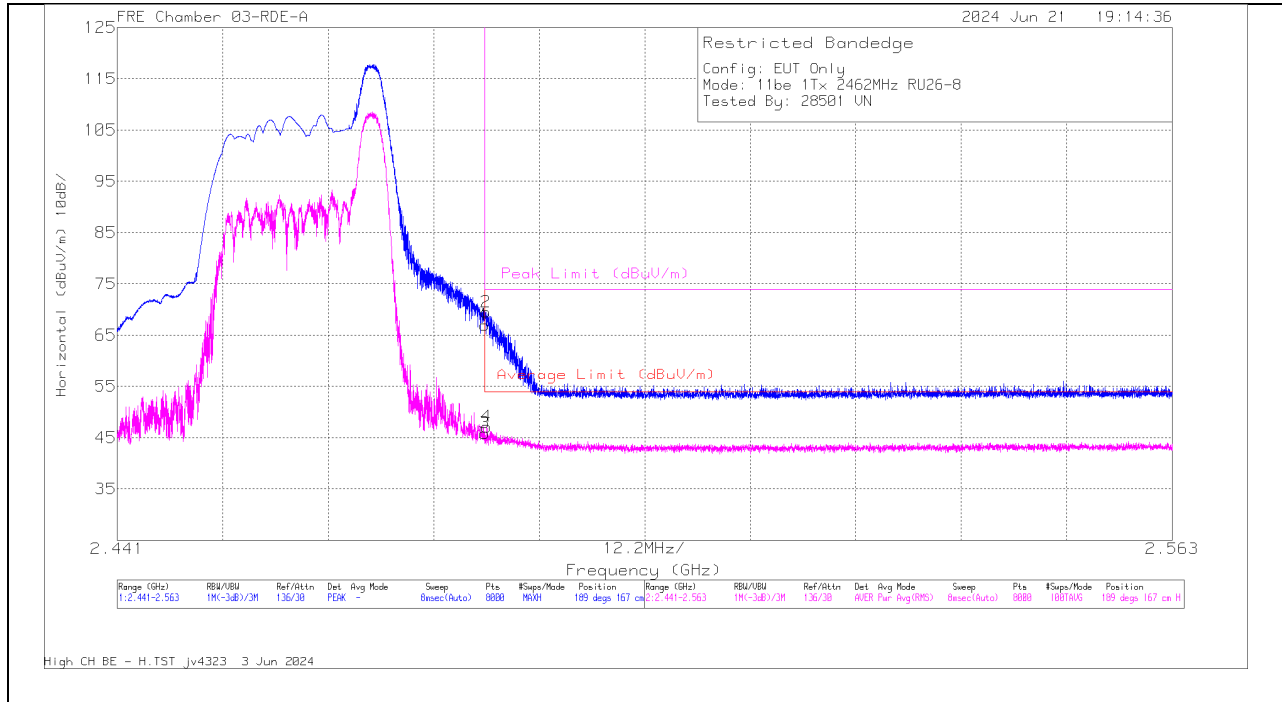

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.64	Pk	32.2	0	-39.84	67	-	-	74	-7	189	167	H
2	* 2.483629	77.12	Pk	32.2	0	-39.83	69.49	-	-	74	-4.51	189	167	H
3	* 2.4835	52.92	RMS	32.2	.6	-39.84	45.88	54	-8.12	-	-	189	167	H
4	* 2.483706	54.16	RMS	32.2	.6	-39.83	47.13	54	-6.87	-	-	189	167	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

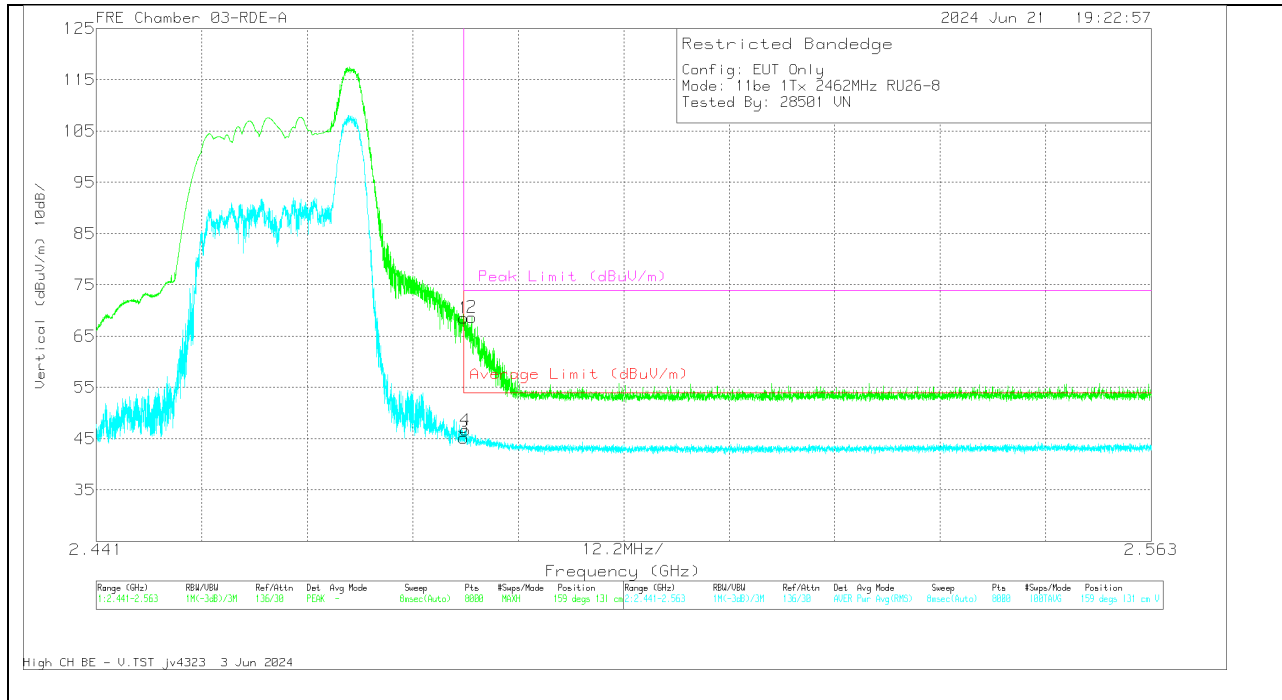


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	76.16	Pk	32.2	0	-39.84	68.52	-	-	74	-5.48	159	131	V
2	* 2.484422	76.31	Pk	32.2	0	-39.83	68.68	-	-	74	-5.32	159	131	V
3	* 2.4835	52.22	RMS	32.2	.6	-39.84	45.18	54	-8.82	-	-	159	131	V
4	* 2.48369	53.69	RMS	32.2	.6	-39.83	46.66	54	-7.34	-	-	159	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

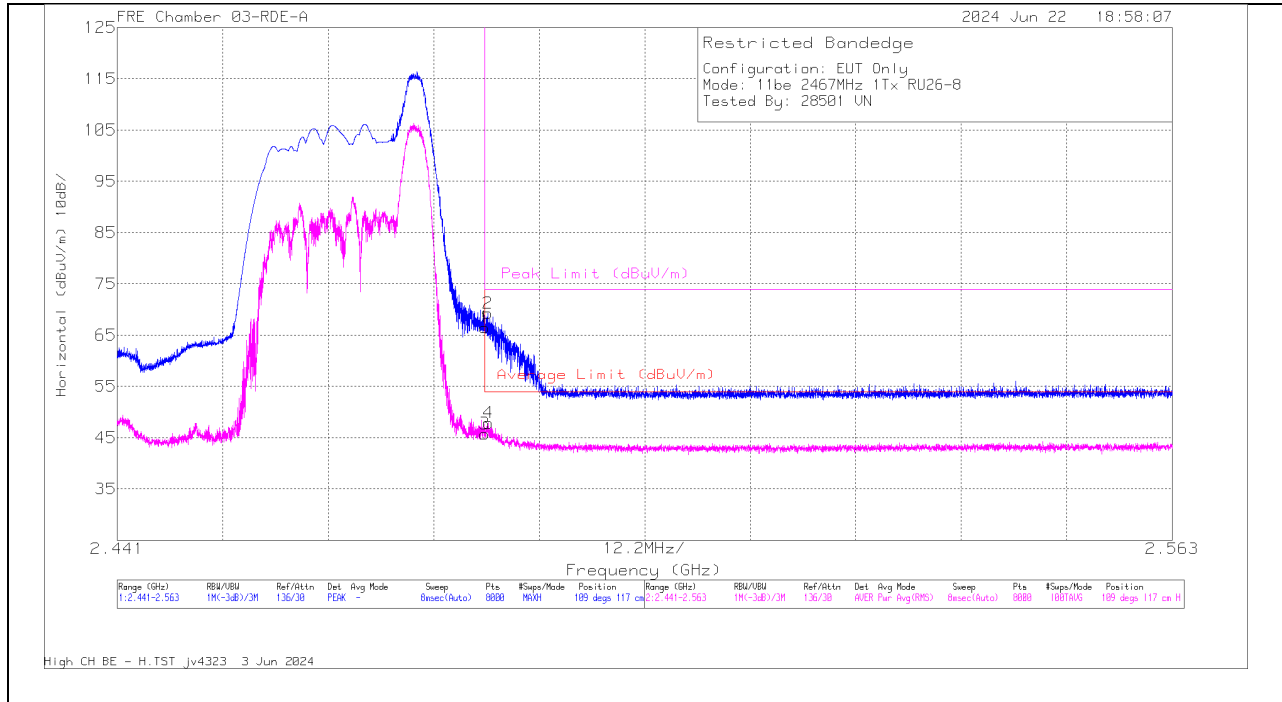

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.15	Pk	32.2	0	-39.84	66.51	-	-	74	-7.49	109	117	H
2	* 2.483873	76.89	Pk	32.2	0	-39.83	69.26	-	-	74	-4.74	109	117	H
3	* 2.4835	52.79	RMS	32.2	.6	-39.84	45.75	54	-8.25	-	-	109	117	H
4	* 2.483934	54.9	RMS	32.2	.6	-39.83	47.87	54	-6.13	-	-	109	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

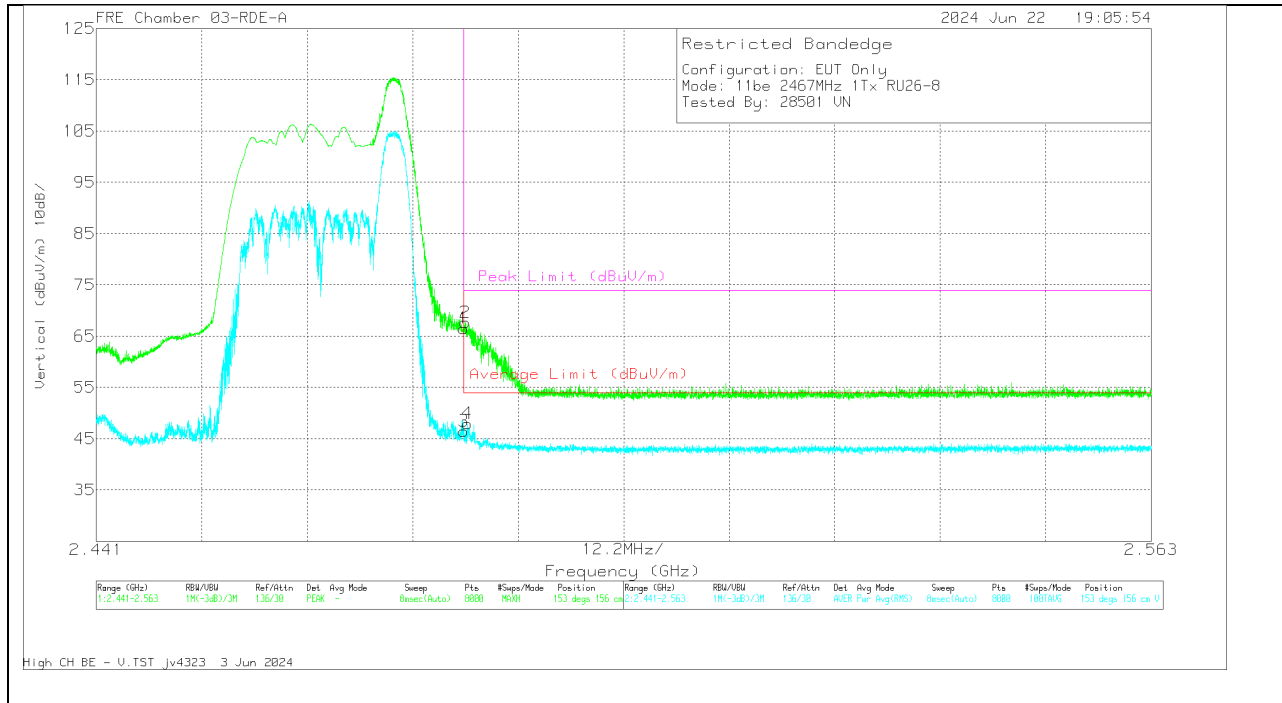


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.14	Pk	32.2	0	-39.84	66.5	-	-	74	-7.5	153	156	V
2	* 2.483675	75.3	Pk	32.2	0	-39.83	67.67	-	-	74	-6.33	153	156	V
3	* 2.4835	53.5	RMS	32.2	.6	-39.84	46.46	54	-7.54	-	-	153	156	V
4	* 2.48395	54.99	RMS	32.2	.6	-39.83	47.96	54	-6.04	-	-	153	156	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection


BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

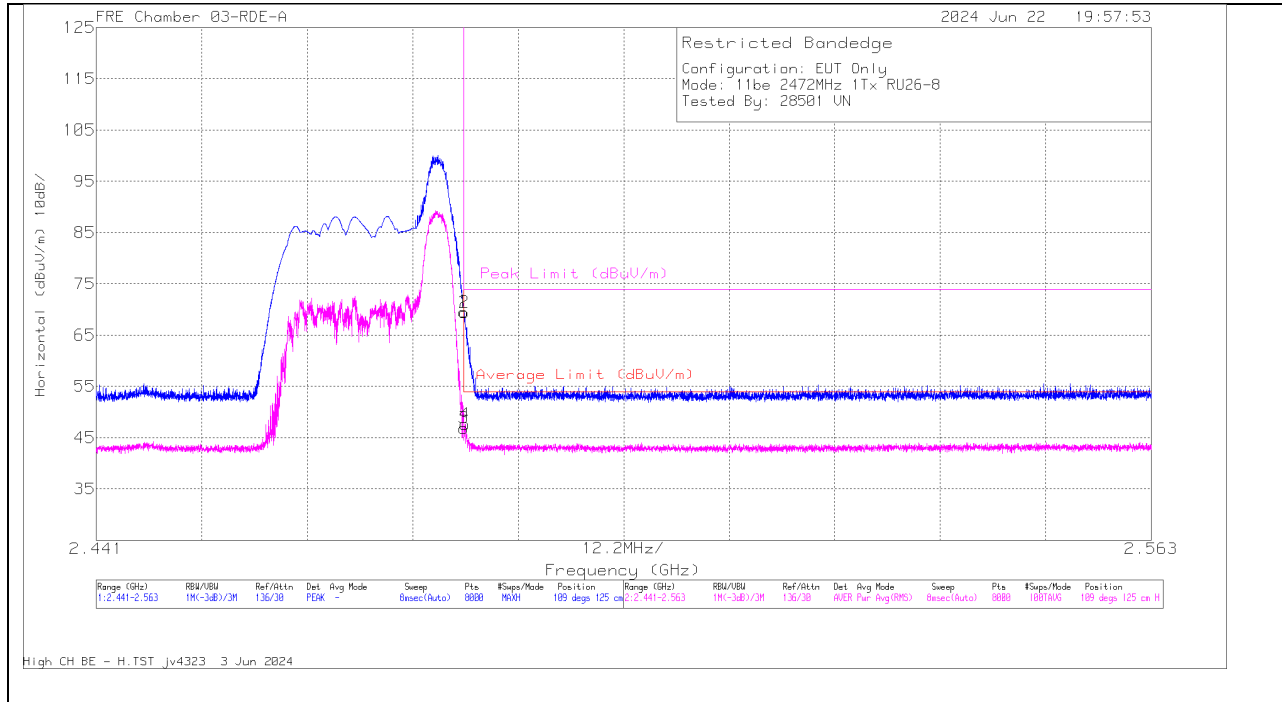

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

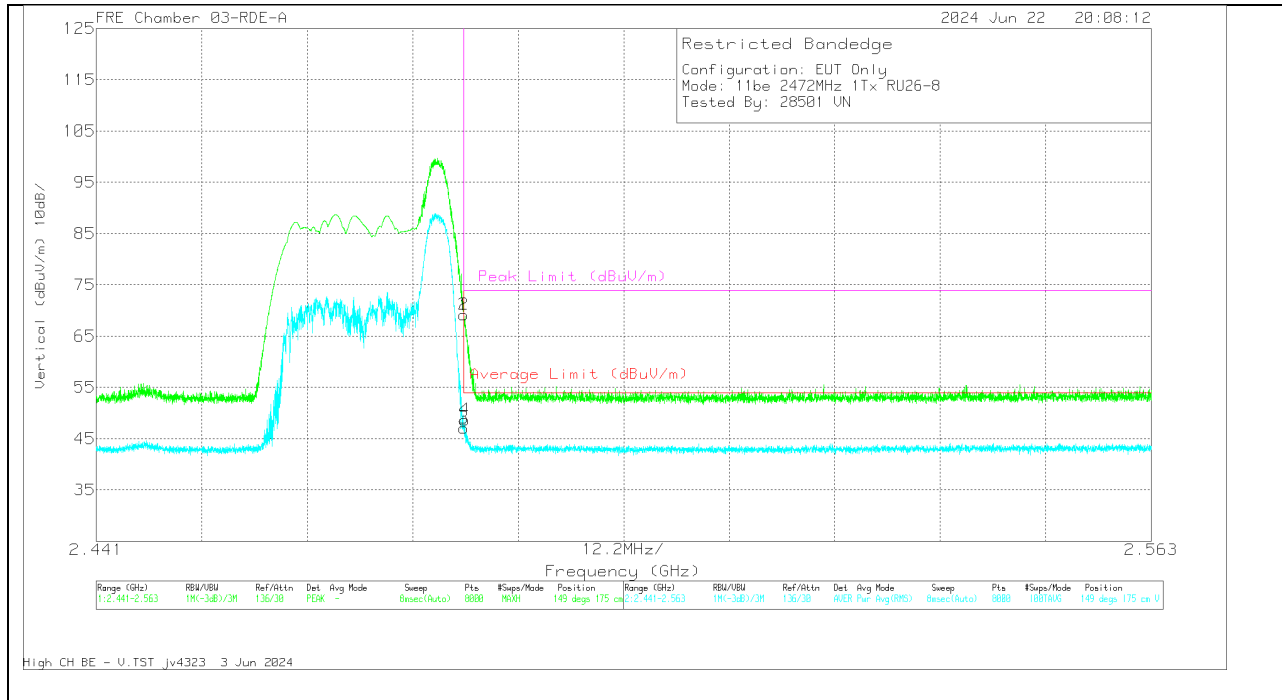


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	76.79	Pk	32.2	0	-39.84	69.15	-	-	74	-4.85	149	175	V
2	* 2.483523	76.83	Pk	32.2	0	-39.83	69.2	-	-	74	-4.8	149	175	V
3	* 2.4835	54.12	RMS	32.2	.6	-39.84	47.08	54	-6.92	-	-	149	175	V
4	* 2.483614	55.73	RMS	32.2	.6	-39.83	48.7	54	-5.3	-	-	149	175	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

1TX ANT 3 MODE: SU MODE

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

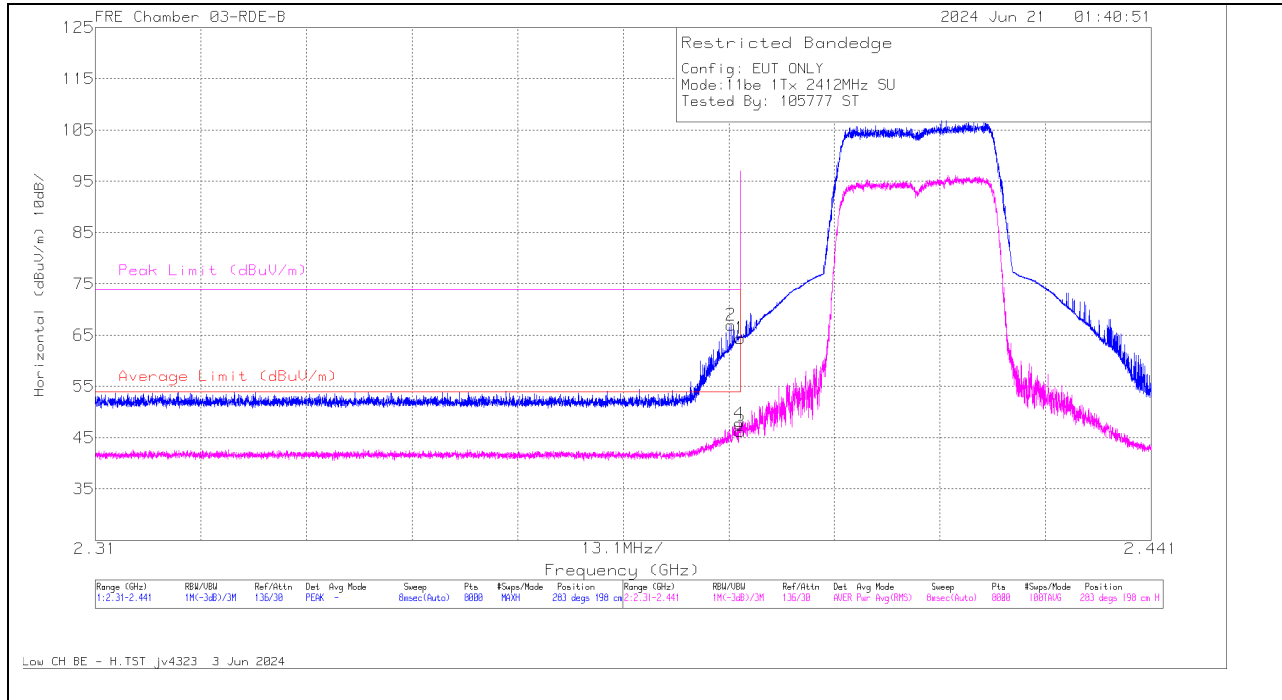

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	73.69	Pk	32.2	0	-41.5	64.39	-	-	74	-9.61	283	198	H
2	* 2.388888	76.28	Pk	32.2	0	-41.51	66.97	-	-	74	-7.03	283	198	H
3	* 2.39	55.03	RMS	32.2	.48	-41.5	46.21	54	-7.79	-	-	283	198	H
4	* 2.389887	56.57	RMS	32.2	.48	-41.5	47.75	54	-6.25	-	-	283	198	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

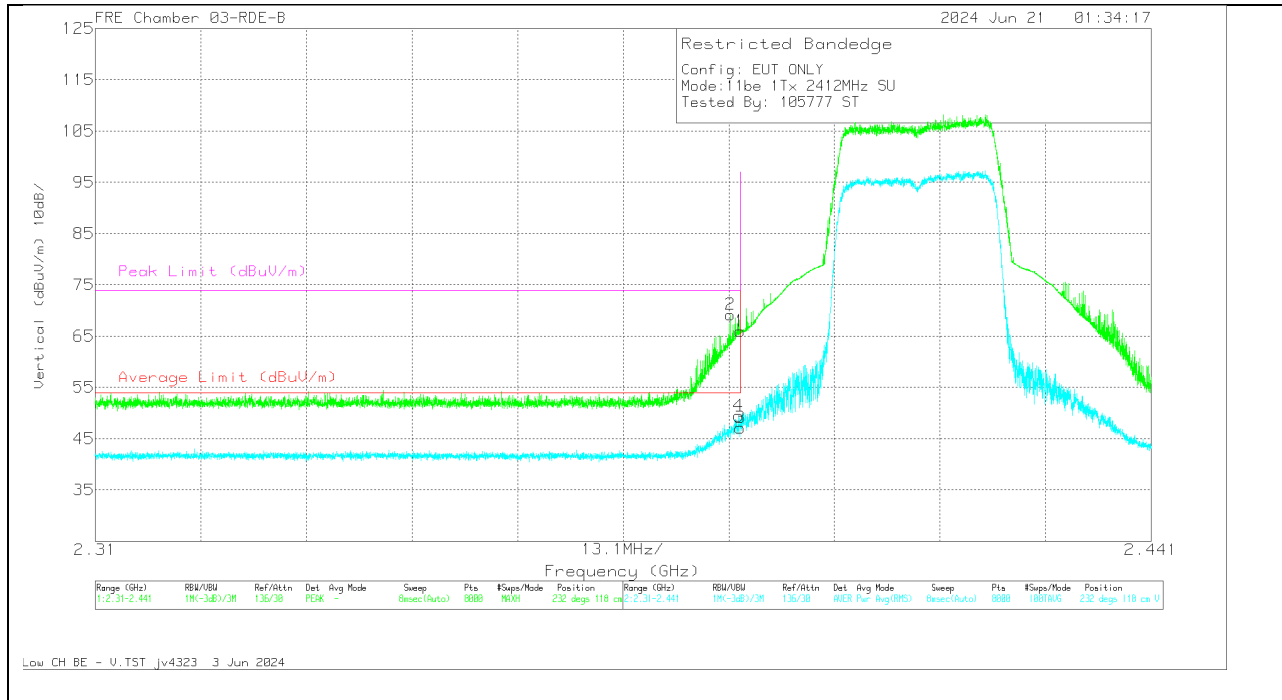


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	75.27	Pk	32.2	0	-41.5	65.97	-	-	74	-8.03	232	118	V
2	* 2.388806	78.52	Pk	32.2	0	-41.52	69.2	-	-	74	-4.8	232	118	V
3	* 2.39	55.94	RMS	32.2	.48	-41.5	47.12	54	-6.88	-	-	232	118	V
4	* 2.389838	58.3	RMS	32.2	.48	-41.5	49.48	54	-4.52	-	-	232	118	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

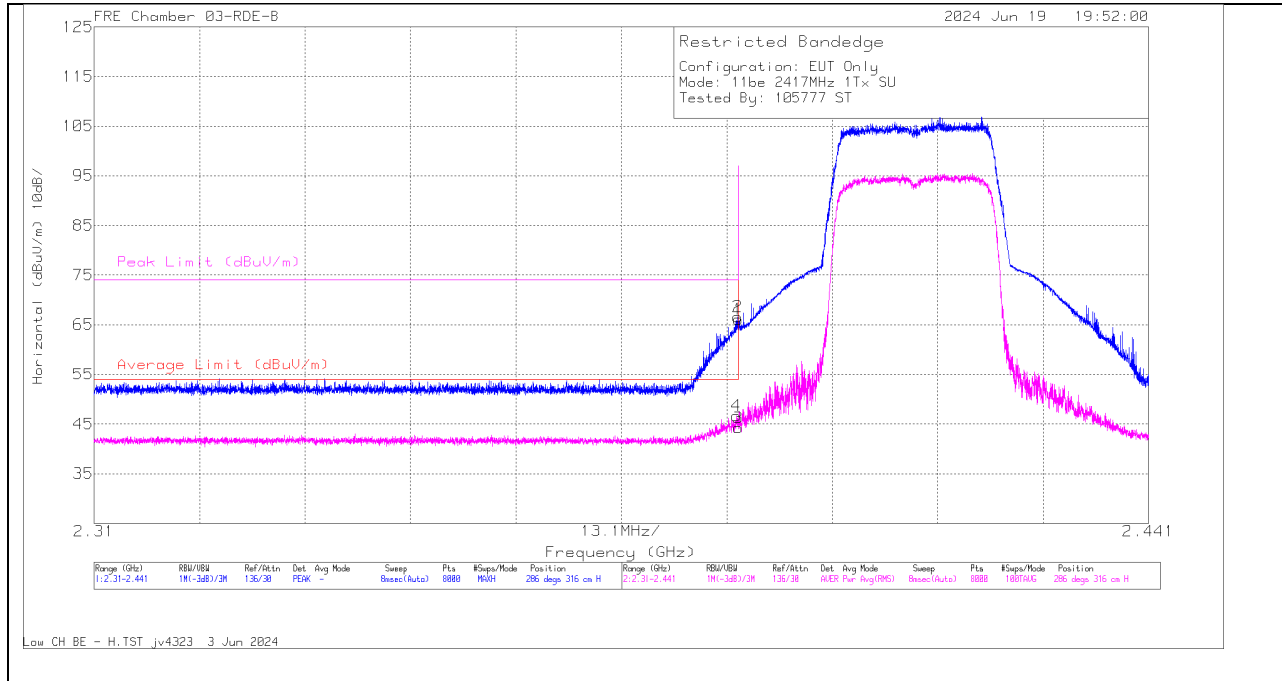

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	75.43	PK	32.2	0	-41.5	66.13	-	-	74	-7.87	286	316	H
2	* 2.389953	75.92	PK	32.2	0	-41.5	66.62	-	-	74	-7.38	286	316	H
3	* 2.39	53.04	RMS	32.2	.48	-41.5	44.22	54	-9.78	-	-	286	316	H
4	* 2.389838	55.51	RMS	32.2	.48	-41.5	46.69	54	-7.31	-	-	286	316	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

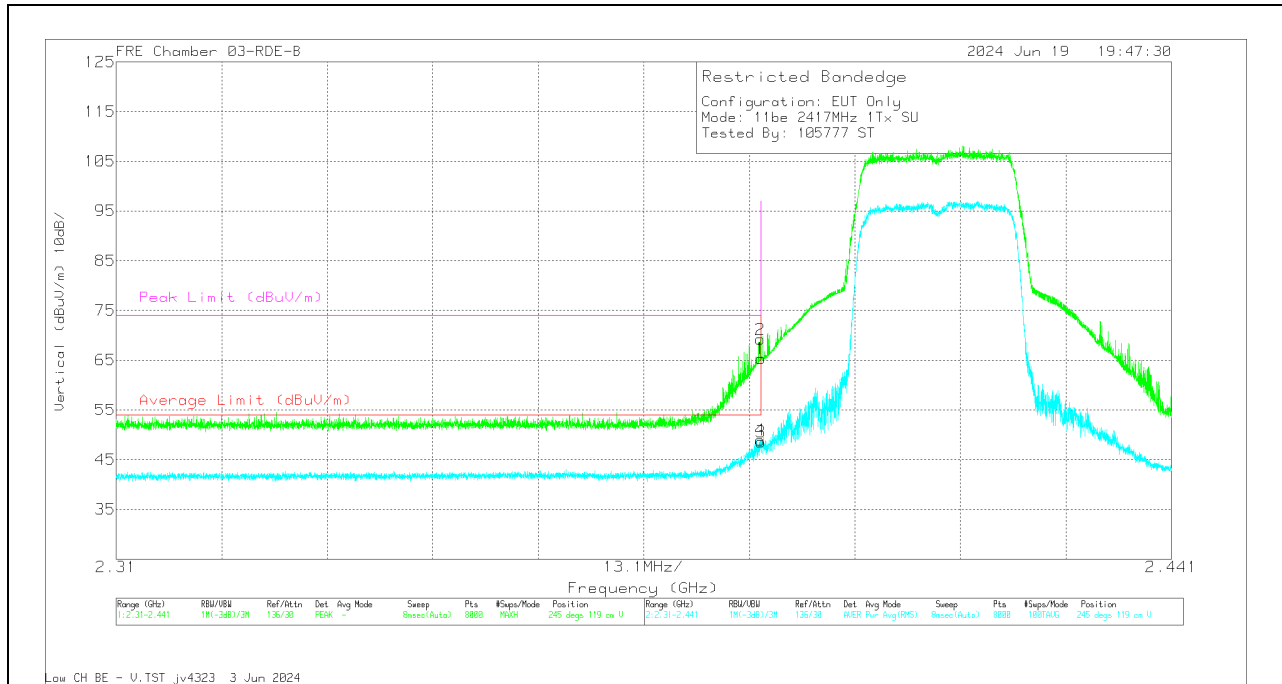


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	74.67	Pk	32.2	0	-41.5	65.37	-	-	74	-8.63	245	119	V
2	* 2.389953	78.49	Pk	32.2	0	-41.5	69.19	-	-	74	-4.81	245	119	V
3	* 2.39	57.37	RMS	32.2	.48	-41.5	48.55	54	-5.45	-	-	245	119	V
4	* 2.389969	57.81	RMS	32.2	.48	-41.5	48.99	54	-5.01	-	-	245	119	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

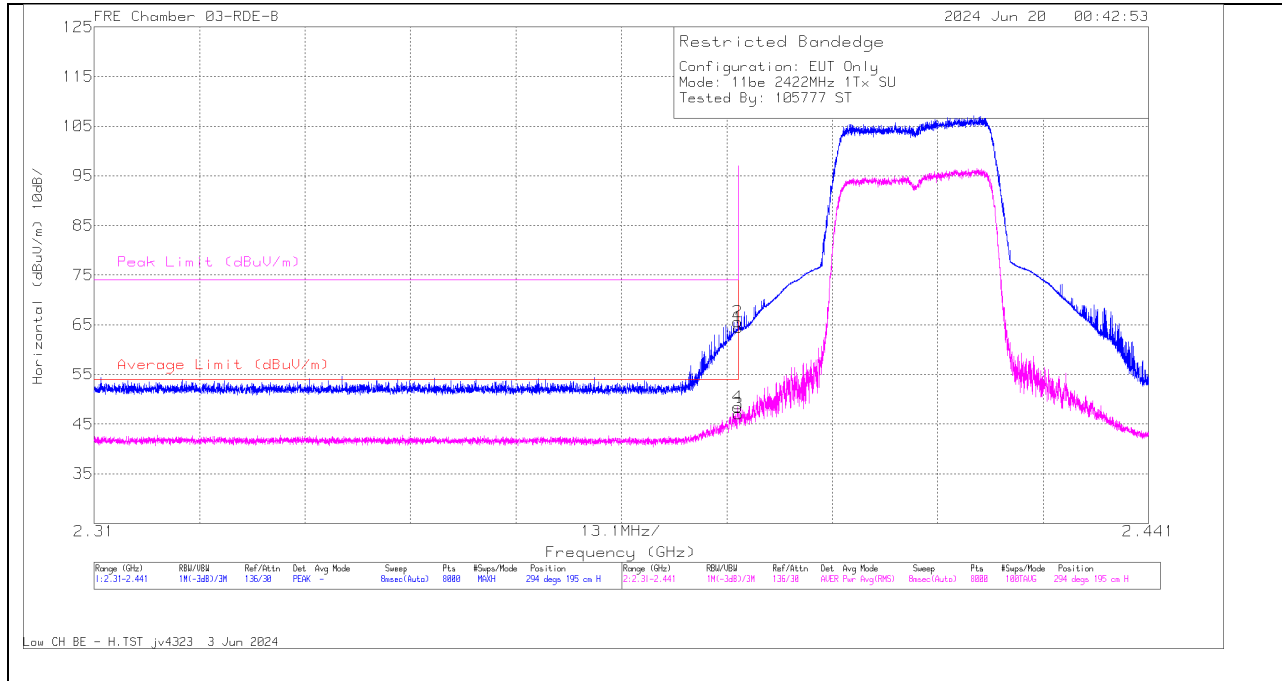

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	73.69	PK	32.2	0	-41.5	64.39	-	-	74	-9.61	294	195	H
2	* 2.389969	74.89	PK	32.2	0	-41.5	65.59	-	-	74	-8.41	294	195	H
3	* 2.39	55.89	RMS	32.2	.48	-41.5	47.07	54	-6.93	-	-	294	195	H
4	* 2.389969	57.23	RMS	32.2	.48	-41.5	48.41	54	-5.59	-	-	294	195	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

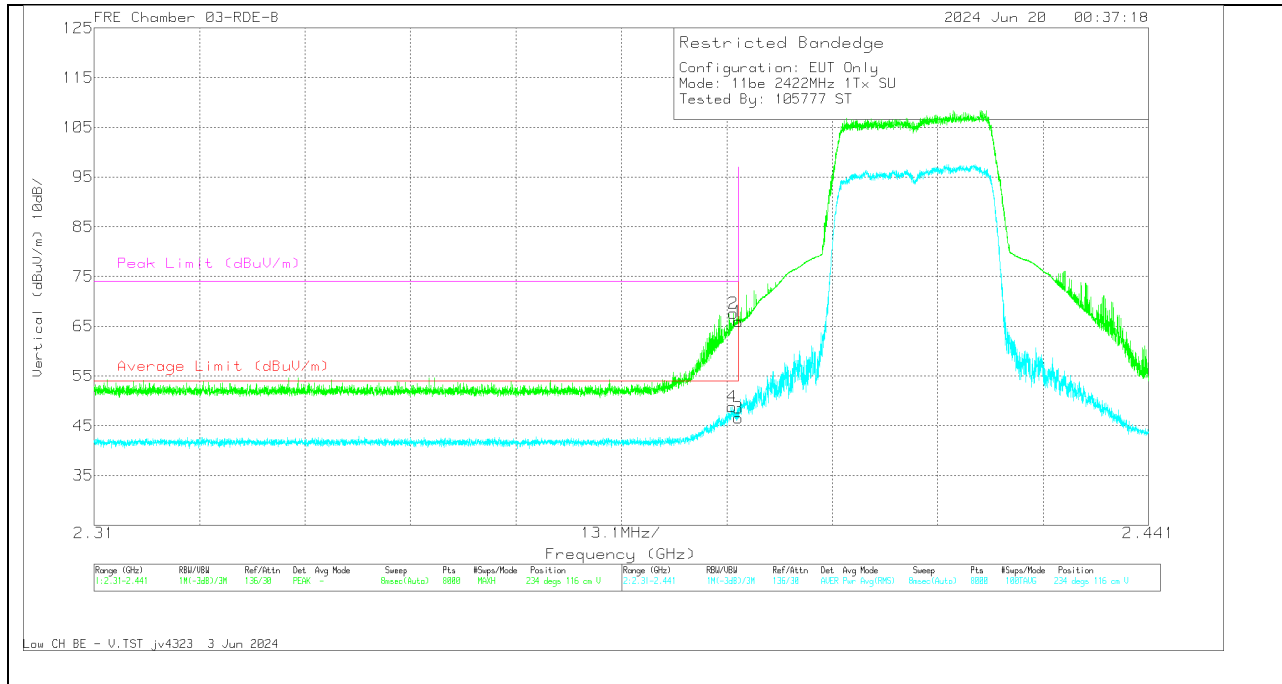


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	75.23	Pk	32.2	0	-41.5	65.93	-	-	74	-8.07	234	116	V
2	* 2.389412	76.93	Pk	32.2	0	-41.5	67.63	-	-	74	-6.37	234	116	V
3	* 2.39	55.4	RMS	32.2	.48	-41.5	46.58	54	-7.42	-	-	234	116	V
4	* 2.389265	57.64	RMS	32.2	.48	-41.5	48.82	54	-5.18	-	-	234	116	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

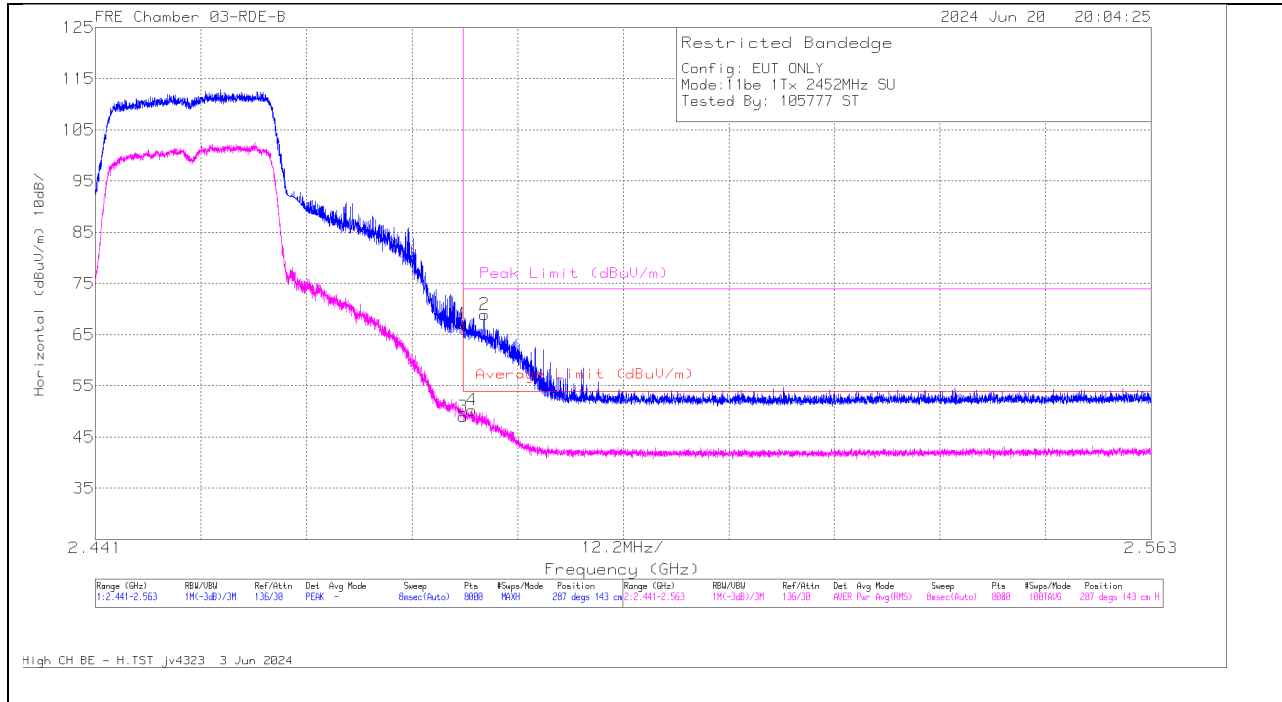

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	76.48	Pk	32.2	0	-41.5	67.18	-	-	74	-6.82	287	143	H
2	* 2.485993	78.24	Pk	32.2	0	-41.5	68.94	-	-	74	-5.06	287	143	H
3	* 2.4835	57.82	RMS	32.2	.48	-41.5	49	54	-5	-	-	287	143	H
4	* 2.484514	59.09	RMS	32.2	.48	-41.5	50.27	54	-3.73	-	-	287	143	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

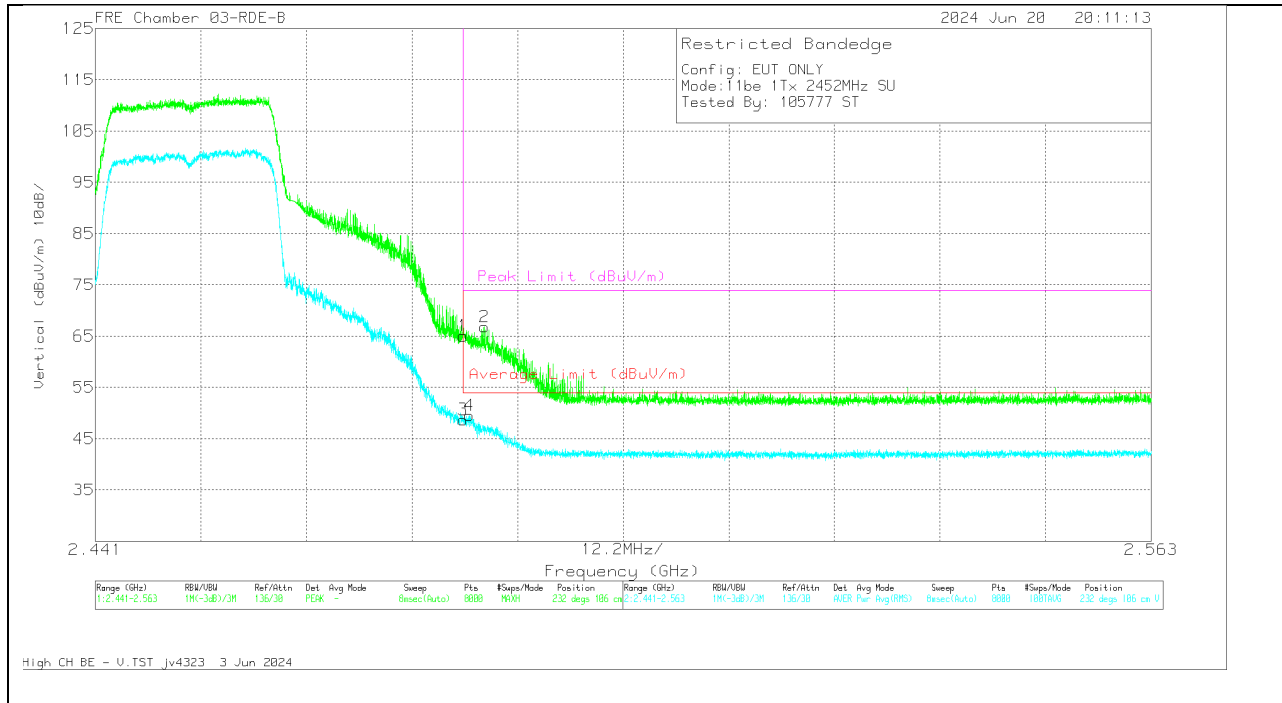


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.36	Pk	32.2	0	-41.5	65.06	-	-	74	-8.94	232	106	V
2	* 2.485948	76.1	Pk	32.2	0	-41.5	66.8	-	-	74	-7.2	232	106	V
3	* 2.4835	57.5	RMS	32.2	.48	-41.5	48.68	54	-5.32	-	-	232	106	V
4	* 2.484239	58.31	RMS	32.2	.48	-41.5	49.49	54	-4.51	-	-	232	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

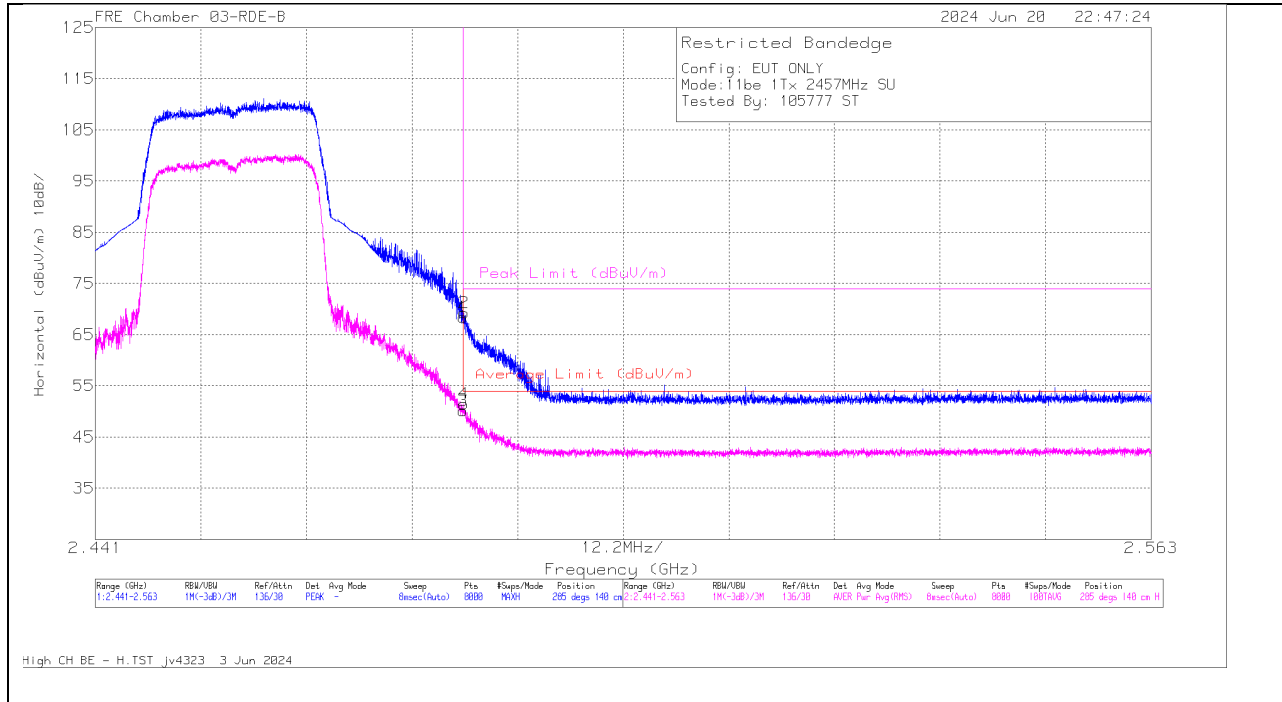

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	77.71	Pk	32.2	0	-41.5	68.41	-	-	74	-5.59	285	140	H
2	* 2.483599	78.54	Pk	32.2	0	-41.5	69.24	-	-	74	-4.76	285	140	H
3	* 2.4835	58.97	RMS	32.2	.48	-41.5	50.15	54	-3.85	-	-	285	140	H
4	* 2.483568	60.29	RMS	32.2	.48	-41.5	51.47	54	-2.53	-	-	285	140	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

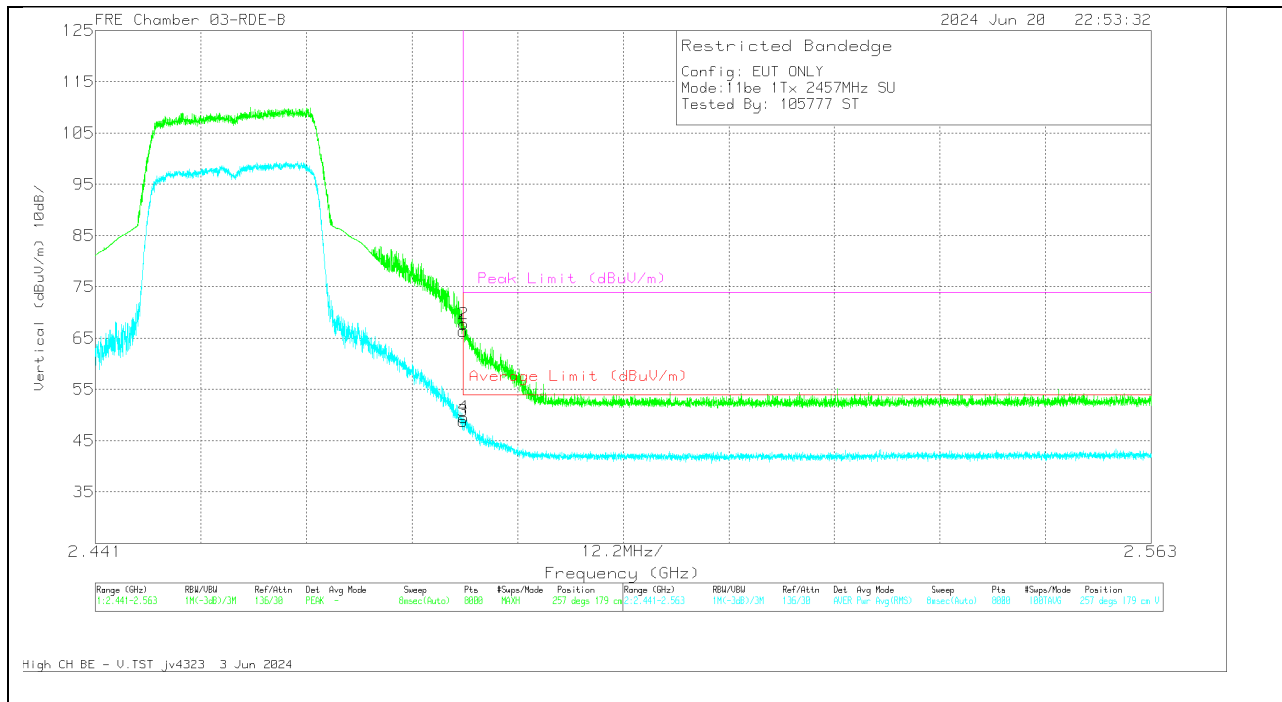


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.71	Pk	32.2	0	-41.5	66.41	-	-	74	-7.59	257	179	V
2	* 2.483553	77.1	Pk	32.2	0	-41.5	67.8	-	-	74	-6.2	257	179	V
3	* 2.4835	57.68	RMS	32.2	.48	-41.5	48.86	54	-5.14	-	-	257	179	V
4	* 2.483568	58.37	RMS	32.2	.48	-41.5	49.55	54	-4.45	-	-	257	179	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

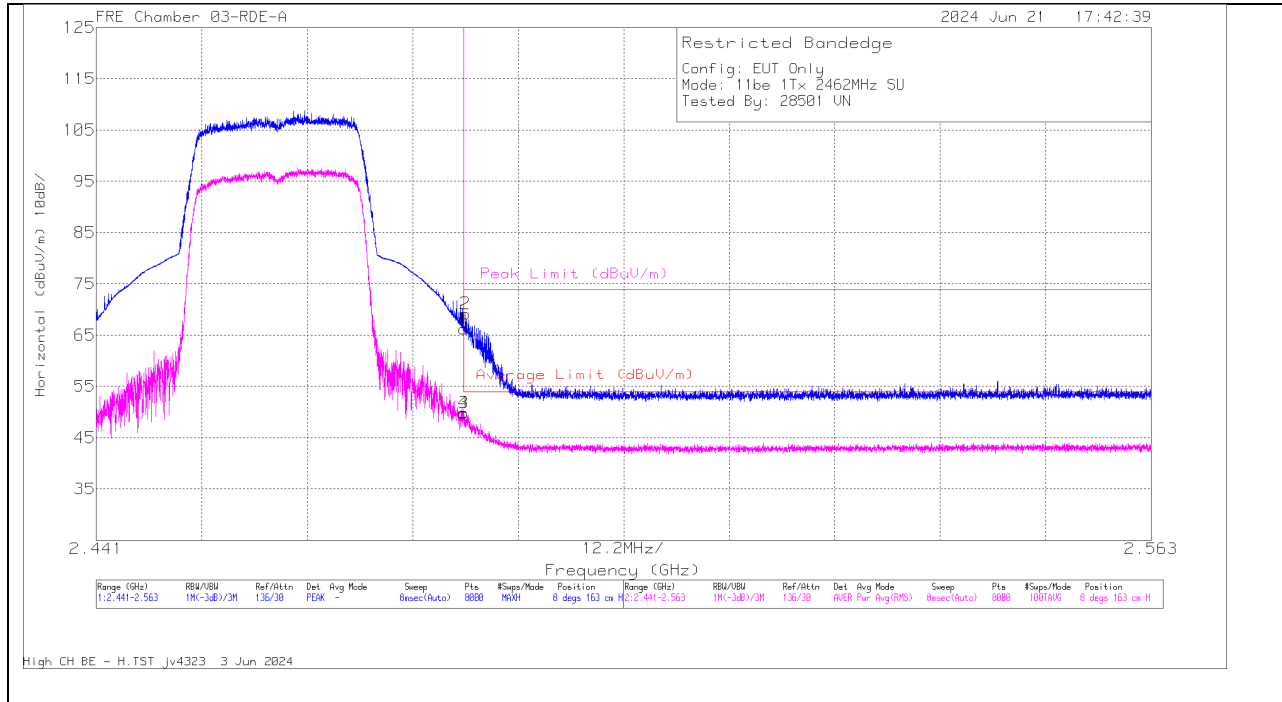

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.84	Pk	32.2	0	-39.84	66.2	-	-	74	-7.8	8	163	H
2	* 2.483675	76.8	Pk	32.2	0	-39.83	69.17	-	-	74	-4.83	8	163	H
3	* 2.4835	57.04	RMS	32.2	.48	-39.84	49.88	54	-4.12	-	-	8	163	H
4	* 2.483507	56.97	RMS	32.2	.48	-39.83	49.82	54	-4.18	-	-	8	163	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

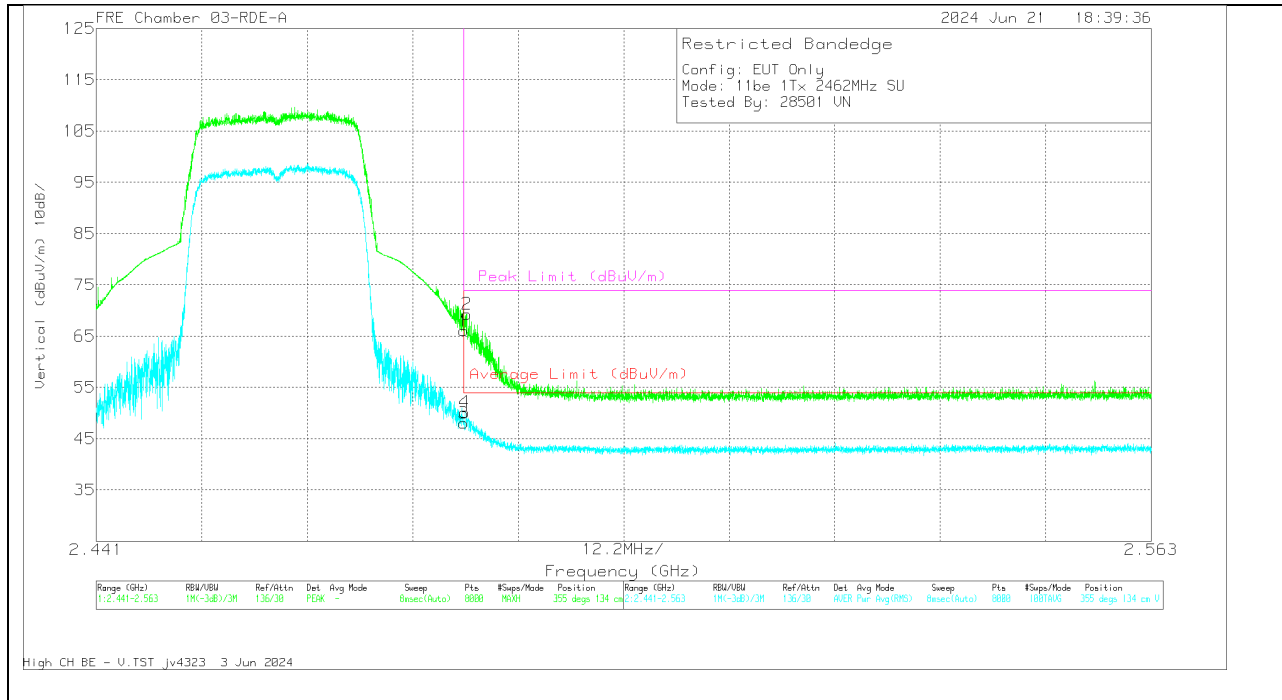


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.73	Pk	32.2	0	-39.84	66.09	-	-	74	-7.91	355	134	V
2	* 2.483843	76.91	Pk	32.2	0	-39.83	69.28	-	-	74	-4.72	355	134	V
3	* 2.4835	55.18	RMS	32.2	.48	-39.84	48.02	54	-5.98	-	-	355	134	V
4	* 2.483614	57.31	RMS	32.2	.48	-39.83	50.16	54	-3.84	-	-	355	134	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

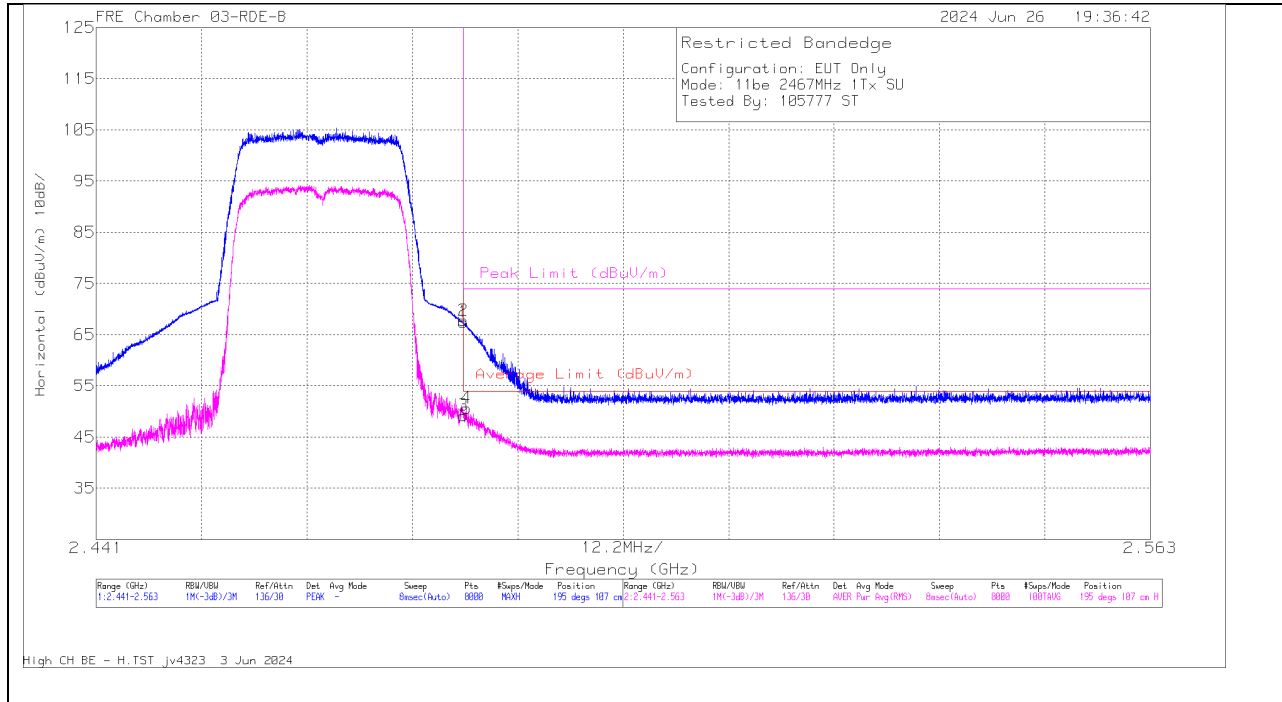

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	76.76	Pk	32.2	0	-41.5	67.46	-	-	74	-6.54	195	107	H
2	* 2.483507	77.07	Pk	32.2	0	-41.5	67.77	-	-	74	-6.23	195	107	H
3	* 2.4835	58.02	RMS	32.2	.48	-41.5	49.2	54	-4.8	-	-	195	107	H
4	* 2.483843	59.45	RMS	32.2	.48	-41.5	50.63	54	-3.37	-	-	195	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

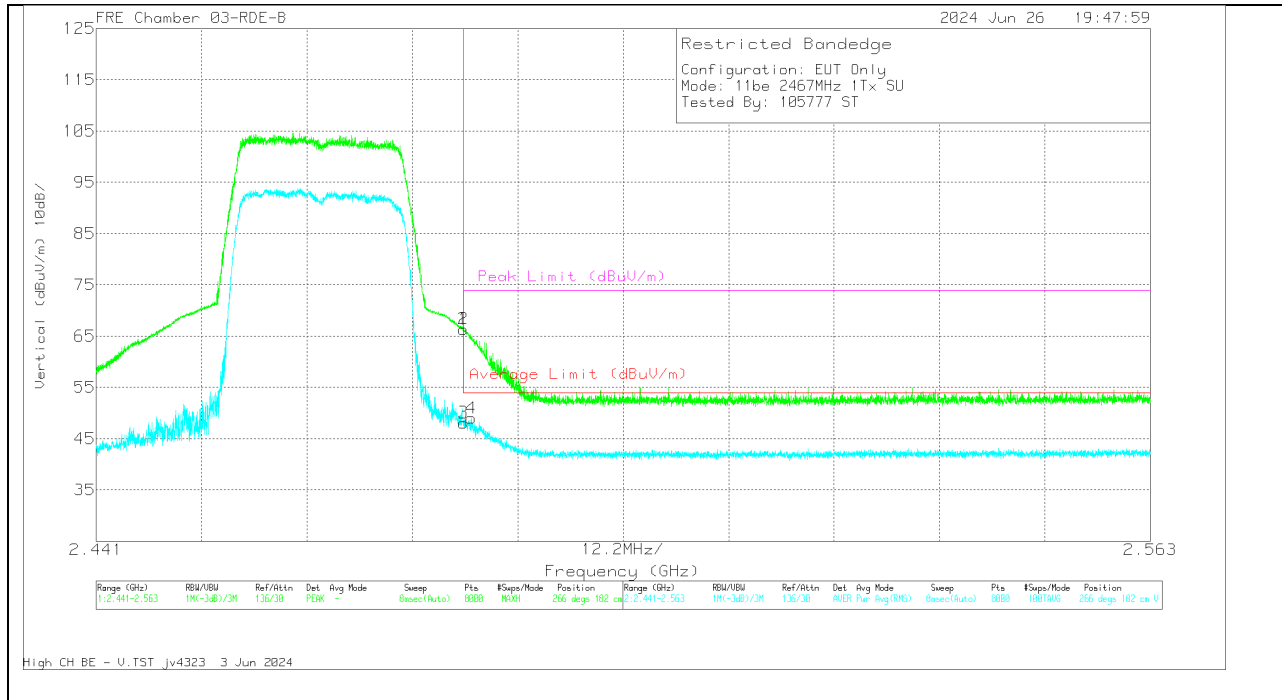


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.66	Pk	32.2	0	-41.5	66.36	-	-	74	-7.64	266	182	V
2	* 2.483523	75.69	Pk	32.2	0	-41.5	66.39	-	-	74	-7.61	266	182	V
3	* 2.4835	56.91	RMS	32.2	.48	-41.5	48.09	54	-5.91	-	-	266	182	V
4	* 2.48407	57.84	RMS	32.2	.48	-41.5	49.02	54	-4.98	-	-	266	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

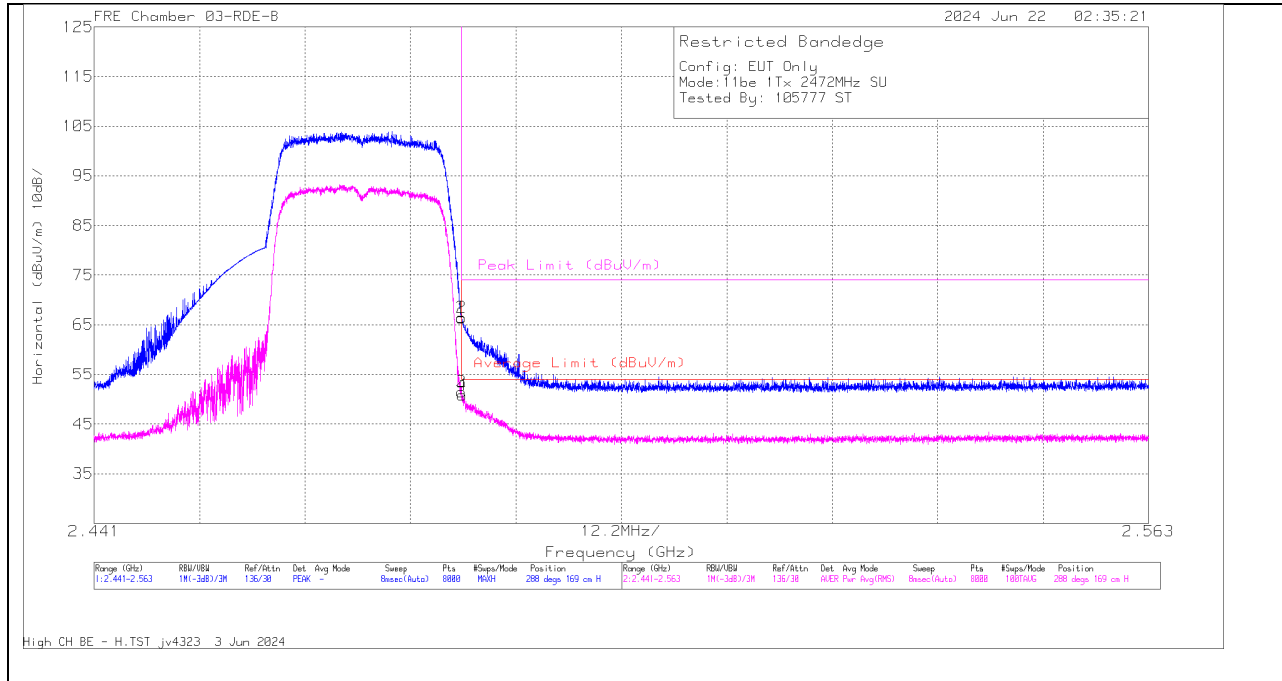

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.64	PK	32.2	0	-41.5	66.34	-	-	74	-7.66	288	169	H
2	* 2.483523	75.77	PK	32.2	0	-41.5	66.47	-	-	74	-7.53	288	169	H
3	* 2.4835	60.33	RMS	32.2	.48	-41.5	51.51	54	-2.49	-	-	288	169	H
4	* 2.483614	59.69	RMS	32.2	.48	-41.5	50.87	54	-3.13	-	-	288	169	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

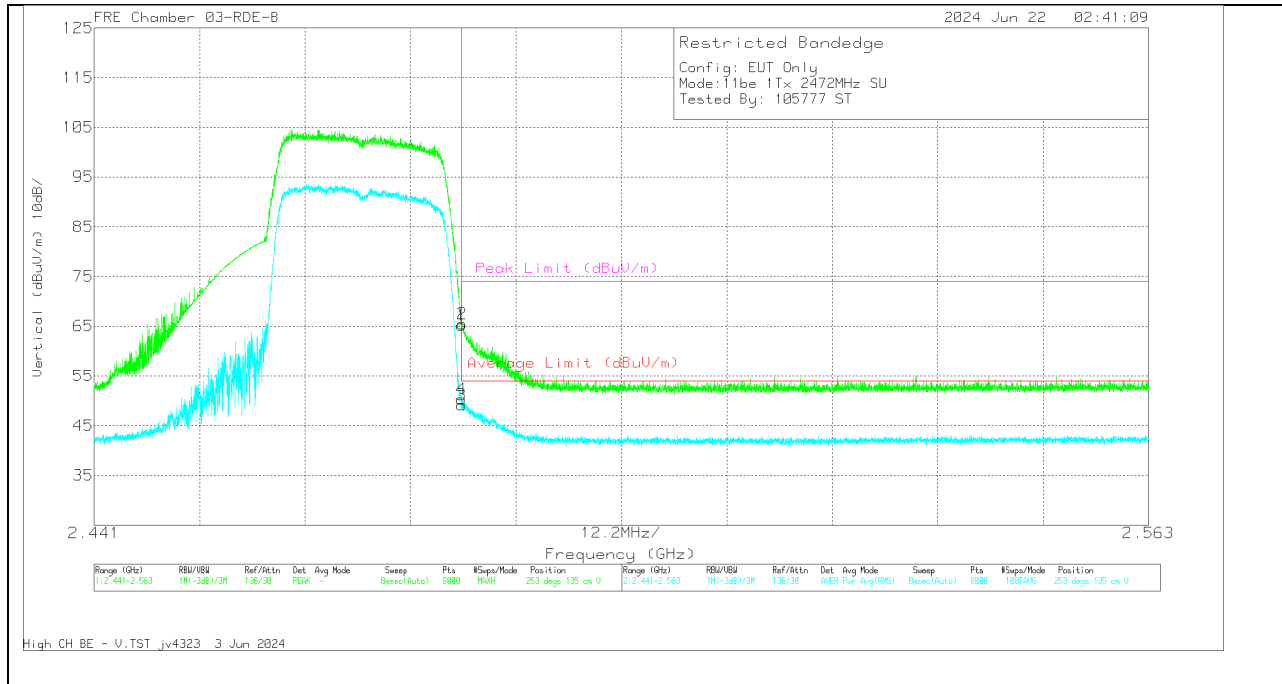

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.54	Pk	32.2	0	-41.5	65.24	-	-	74	-8.76	253	135	V
2	* 2.483553	74.82	Pk	32.2	0	-41.5	65.52	-	-	74	-8.48	253	135	V
3	* 2.4835	57.99	RMS	32.2	.48	-41.5	49.17	54	-4.83	-	-	253	135	V
4	* 2.483538	59.14	RMS	32.2	.48	-41.5	50.32	54	-3.68	-	-	253	135	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.1.7. TX ABOVE 1 GHz 802.11be EHT20 OFDMA MODE IN THE 2.4 GHz BAND

2TX ANT 4 + ANT 3 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

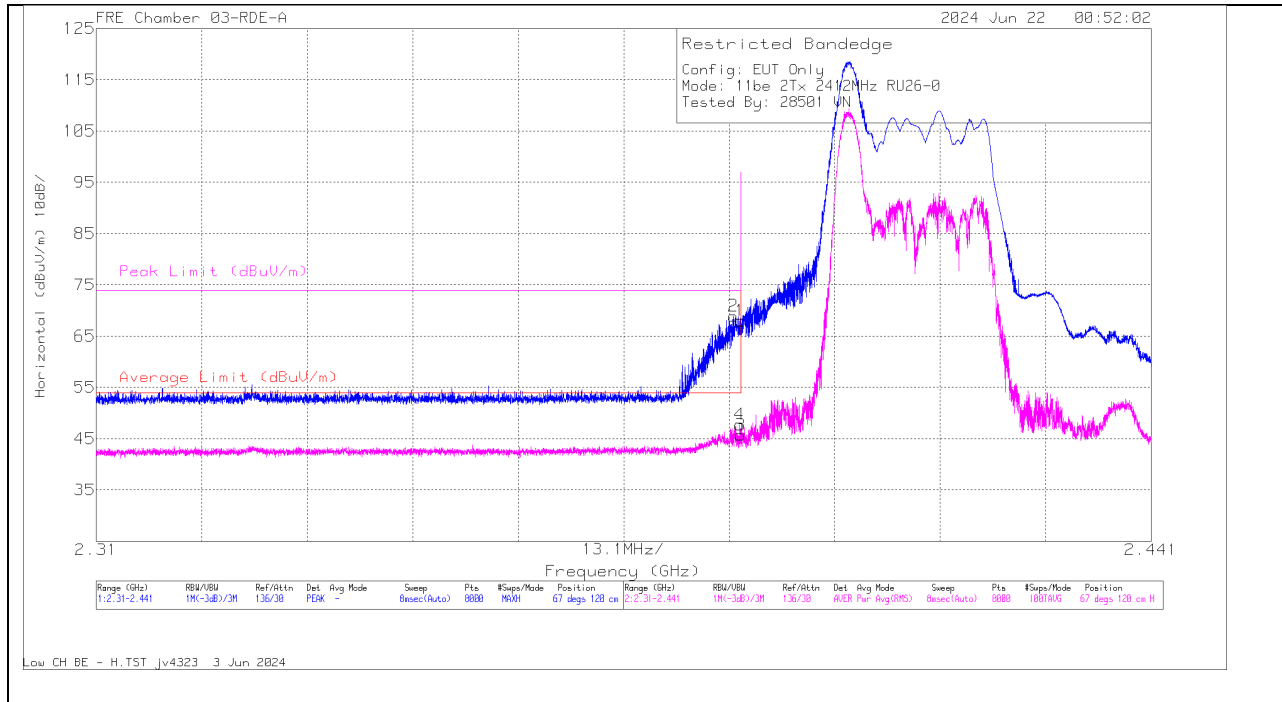

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	75.97	Pk	32.1	0	-40.07	68	-	-	74	-6	67	120	H
2	* 2.389117	76.87	Pk	32.1	0	-40.05	68.92	-	-	74	-5.08	67	120	H
3	* 2.39	53.06	RMS	32.1	.6	-40.07	45.69	54	-8.31	-	-	67	120	H
4	* 2.389903	55.11	RMS	32.1	.6	-40.07	47.74	54	-6.26	-	-	67	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

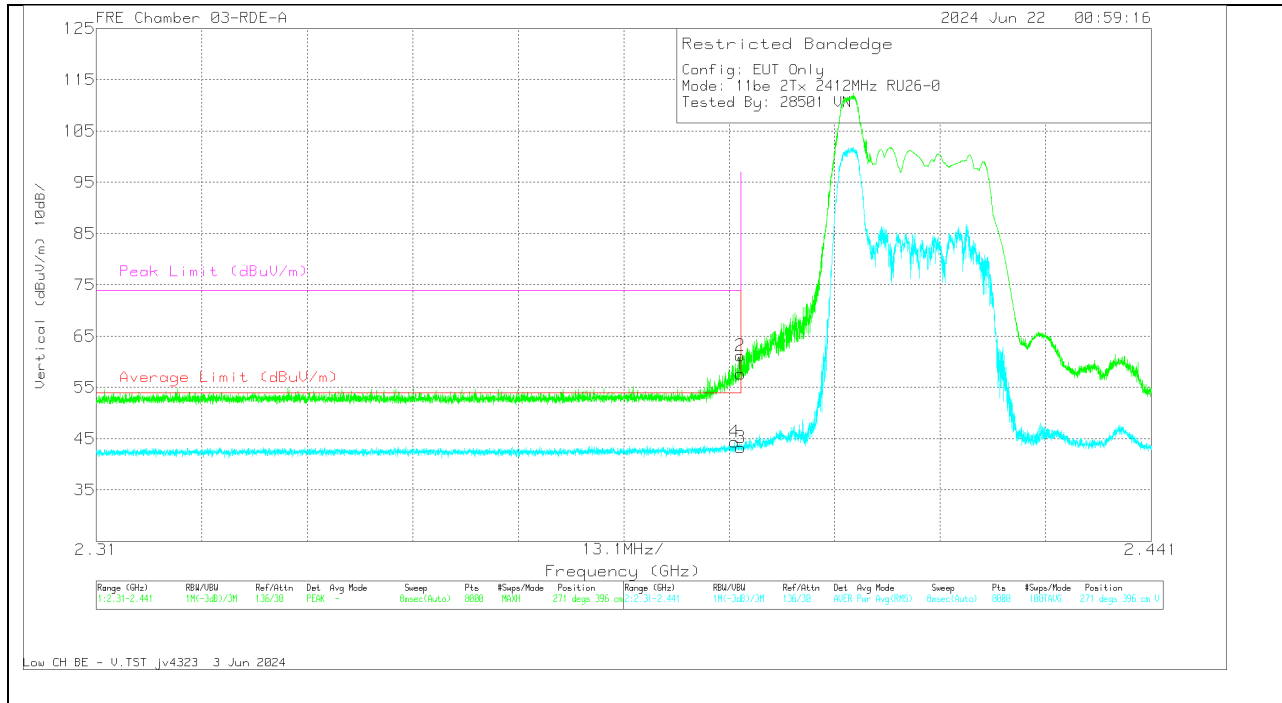


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	65.63	Pk	32.1	0	-40.07	57.66	-	-	74	-16.34	271	396	V
2	* 2.389953	69.15	Pk	32.1	0	-40.07	61.18	-	-	74	-12.82	271	396	V
3	* 2.39	50.65	RMS	32.1	.6	-40.07	43.28	54	-10.72	-	-	271	396	V
4	* 2.389265	51.75	RMS	32.1	.6	-40.06	44.39	54	-9.61	-	-	271	396	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

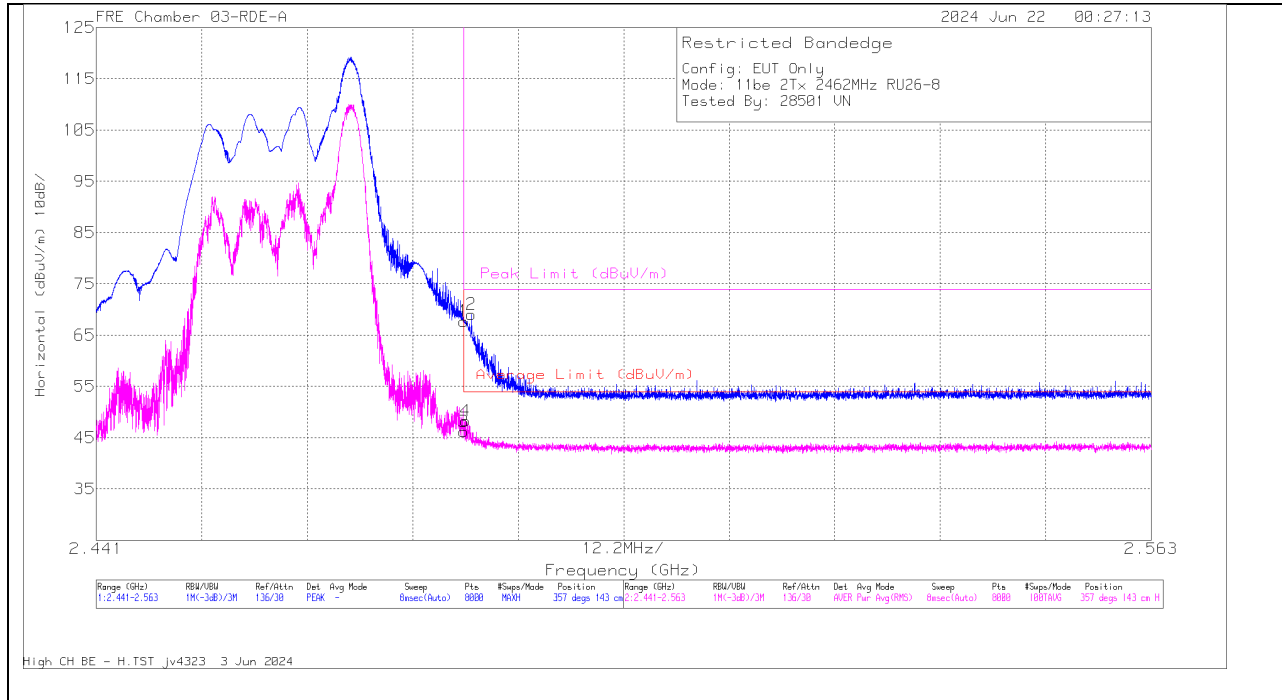

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	75.34	Pk	32.2	0	-39.84	67.7	-	-	74	-6.3	357	143	H
2	* 2.484392	76.66	Pk	32.2	0	-39.83	69.03	-	-	74	-4.97	357	143	H
3	* 2.4835	53.23	RMS	32.2	.6	-39.84	46.19	54	-7.81	-	-	357	143	H
4	* 2.48369	55.29	RMS	32.2	.6	-39.83	48.26	54	-5.74	-	-	357	143	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

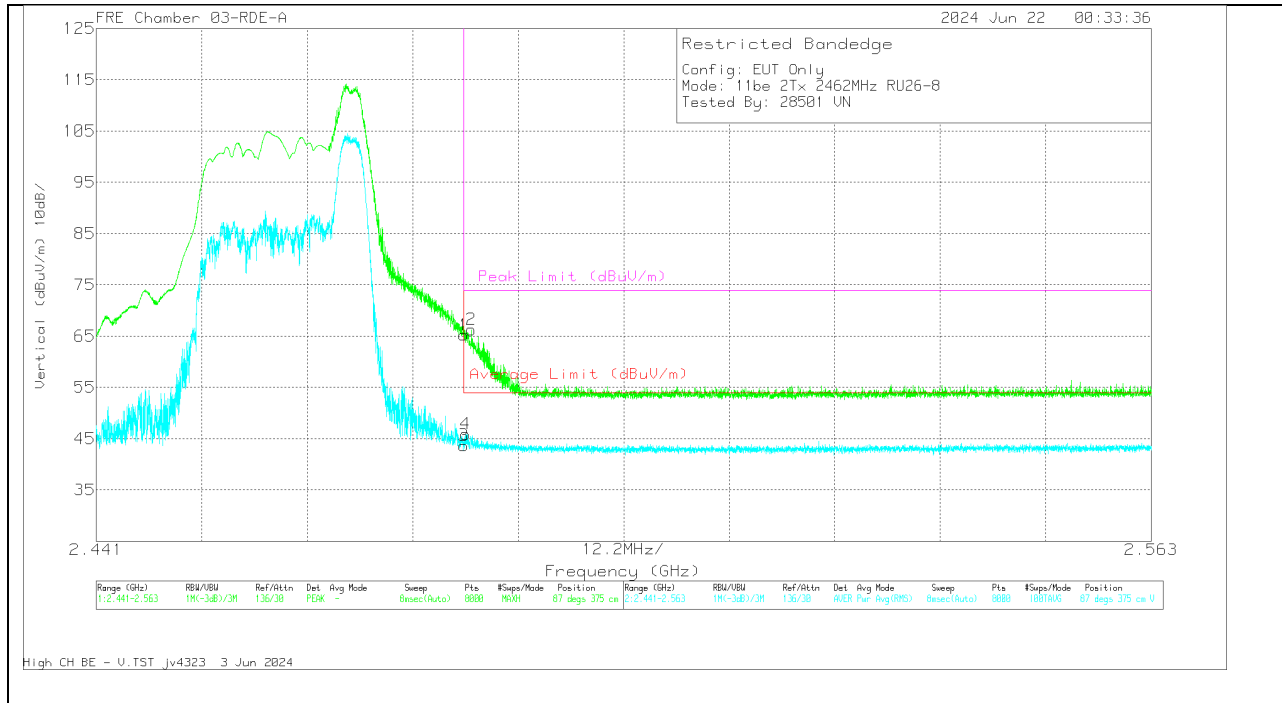


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	72.84	Pk	32.2	0	-39.84	65.2	-	-	74	-8.8	87	375	V
2	* 2.484377	73.9	Pk	32.2	0	-39.83	66.27	-	-	74	-7.73	87	375	V
3	* 2.4835	50.67	RMS	32.2	.6	-39.84	43.63	54	-10.37	-	-	87	375	V
4	* 2.48369	52.93	RMS	32.2	.6	-39.83	45.9	54	-8.1	-	-	87	375	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

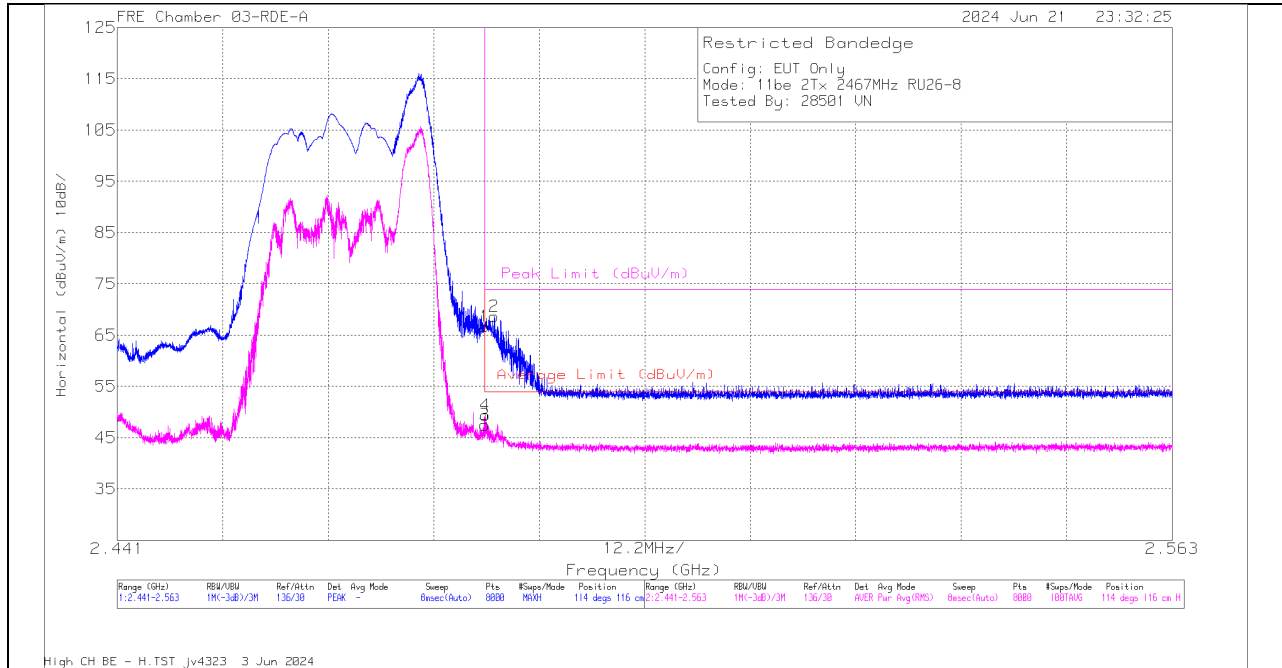

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.31	PK	32.2	0	-39.84	66.67	-	-	74	-7.33	114	116	H
2	* 2.484605	76.25	PK	32.2	0	-39.82	68.63	-	-	74	-5.37	114	116	H
3	* 2.4835	54.54	RMS	32.2	.6	-39.84	47.5	54	-6.5	-	-	114	116	H
4	* 2.483568	56.42	RMS	32.2	.6	-39.83	49.39	54	-4.61	-	-	114	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

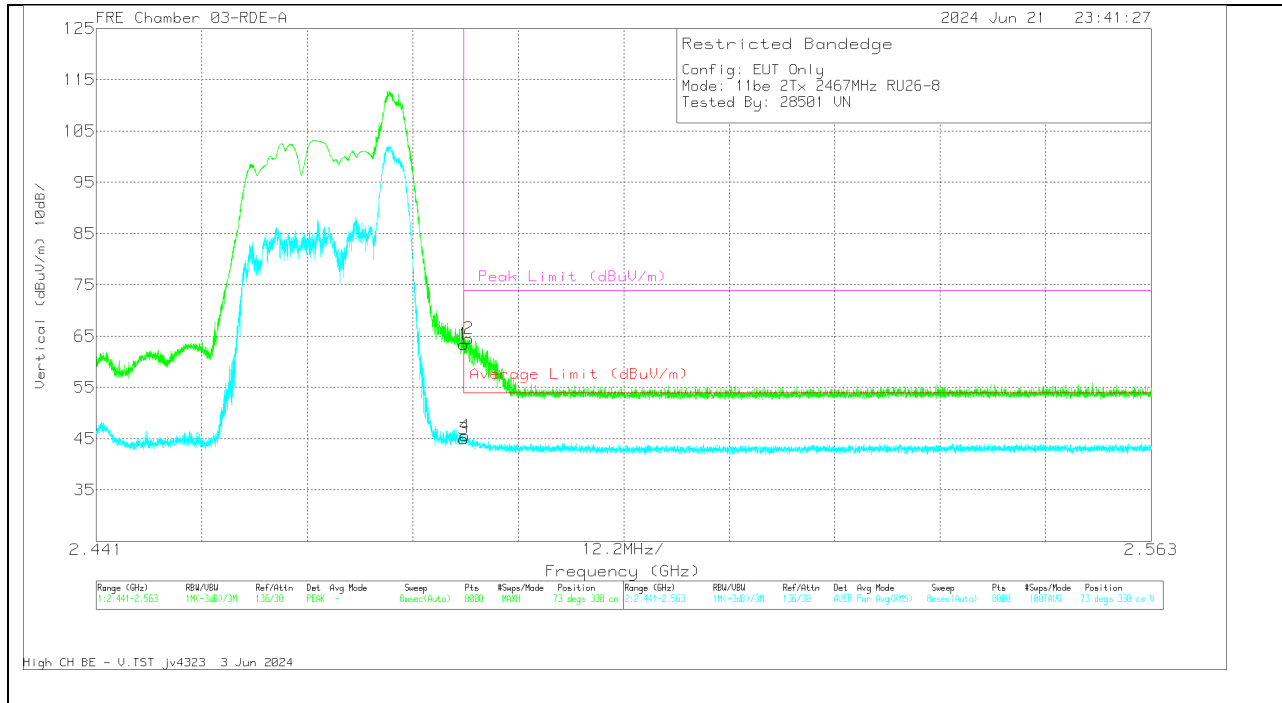


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	71.07	Pk	32.2	0	-39.84	63.43	-	-	74	-10.57	73	330	V
2	* 2.484087	72.16	Pk	32.2	0	-39.83	64.53	-	-	74	-9.47	73	330	V
3	* 2.4835	51.98	RMS	32.2	.6	-39.84	44.94	54	-9.06	-	-	73	330	V
4	* 2.483629	52.61	RMS	32.2	.6	-39.83	45.58	54	-8.42	-	-	73	330	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

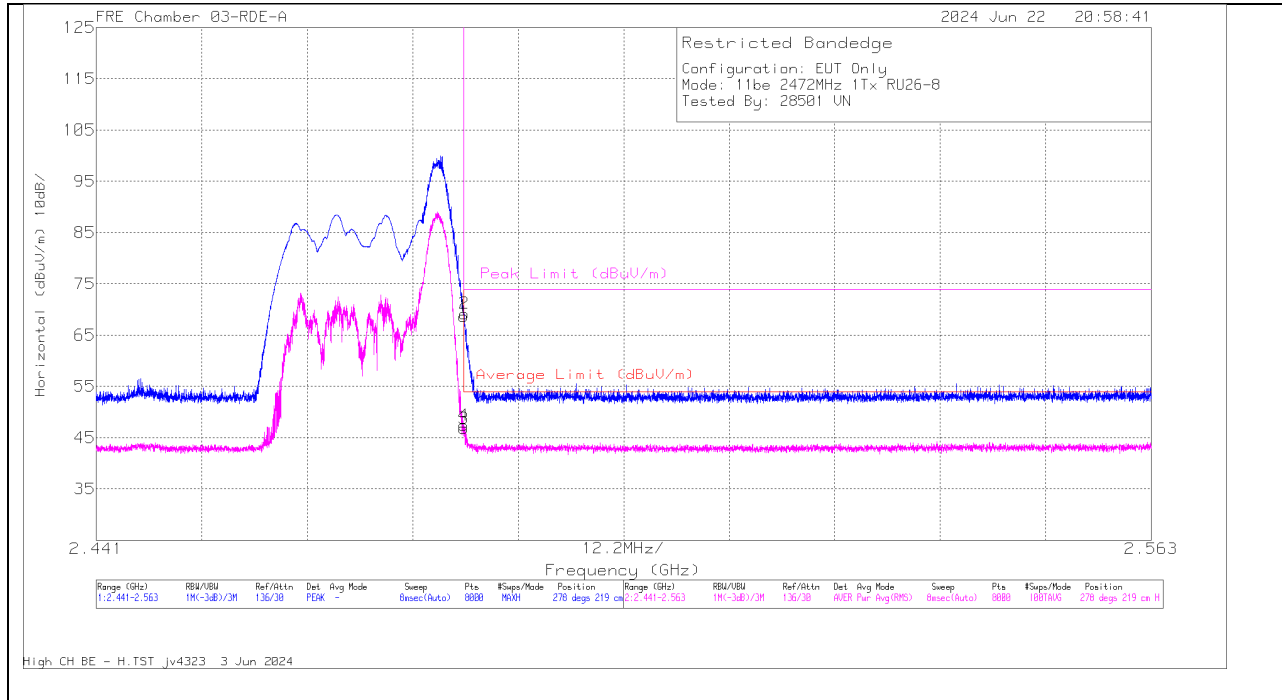

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	76.34	Pk	32.2	0	-39.84	68.7	-	-	74	-5.3	278	219	H
2	* 2.483553	76.83	Pk	32.2	0	-39.83	69.2	-	-	74	-4.8	278	219	H
3	* 2.4835	53.82	RMS	32.2	.6	-39.84	46.78	54	-7.22	-	-	278	219	H
4	* 2.483507	54.44	RMS	32.2	.6	-39.83	47.41	54	-6.59	-	-	278	219	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT


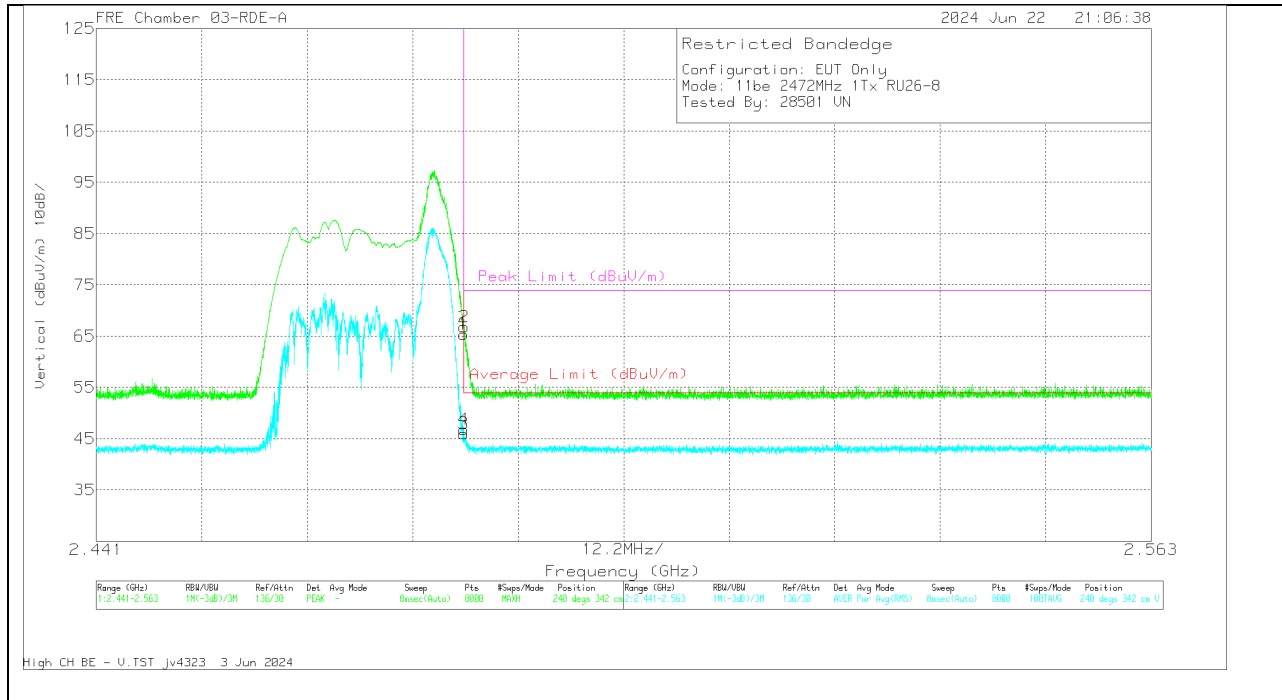


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.01	Pk	32.2	0	-39.84	65.37	-	-	74	-8.63	240	342	V
2	* 2.483538	74.42	Pk	32.2	0	-39.83	66.79	-	-	74	-7.21	240	342	V
3	* 2.4835	53.03	RMS	32.2	.6	-39.84	45.99	54	-8.01	-	-	240	342	V
4	* 2.483507	53.84	RMS	32.2	.6	-39.83	46.81	54	-7.19	-	-	240	342	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.1.8. 11be RU26 2TX, HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

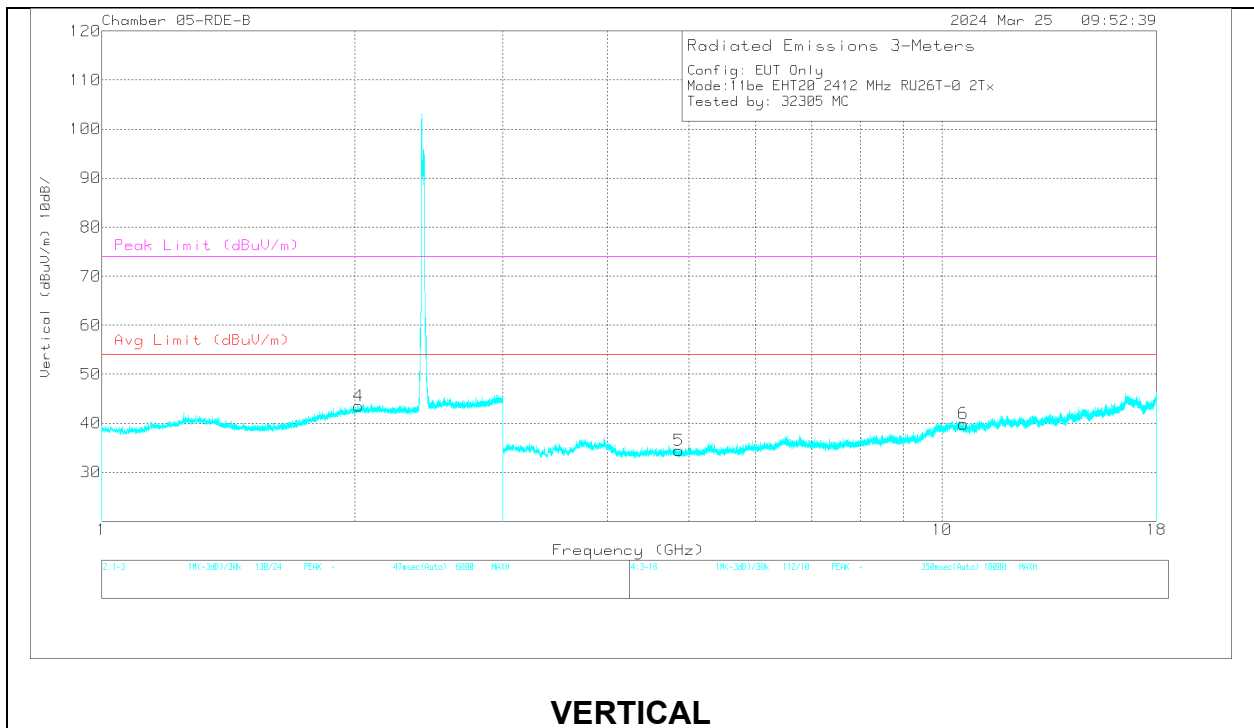
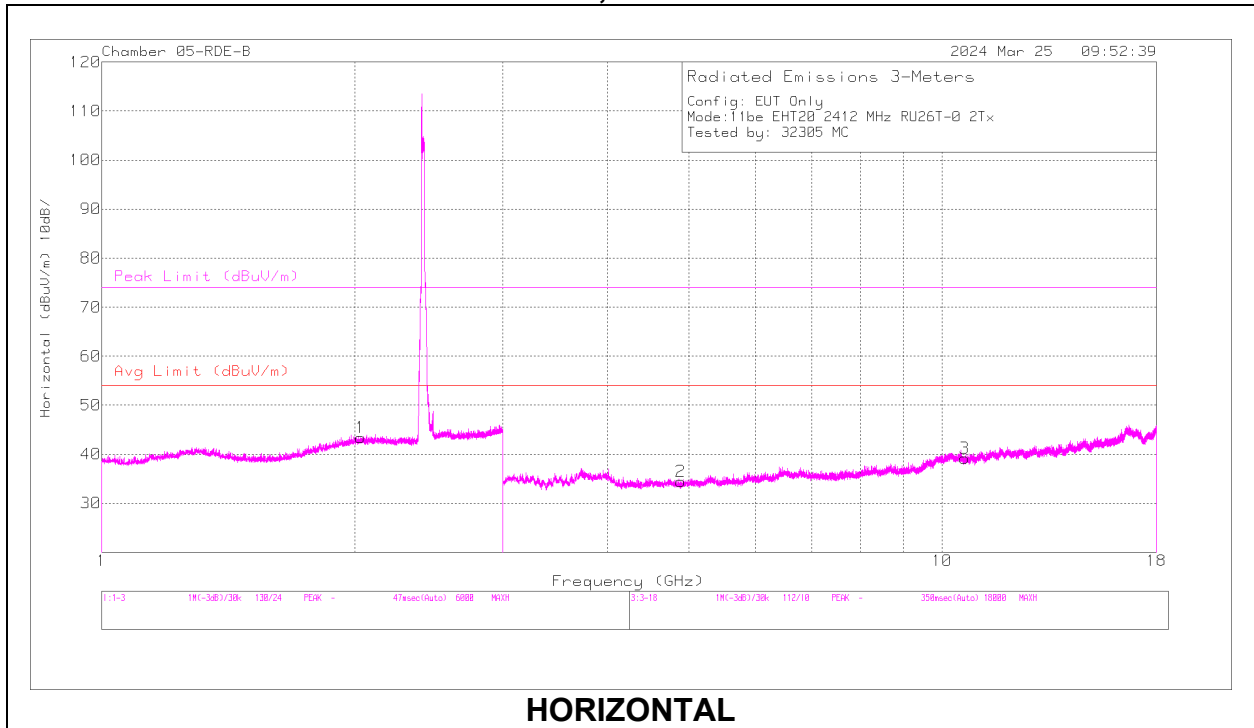


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	2.018754	50.36	MAv1	32	0	-40.91	41.45	-	-	-	-	233	228	V
	2.019632	61.45	PK2	32	0	-40.95	52.5	-	-	74	-21.5	233	228	V
1	2.03209	50.26	MAv1	32	0	-40.91	41.35	-	-	-	-	181	230	H
	2.034372	61.85	PK2	32	0	-40.94	52.91	-	-	74	-21.09	181	230	H
5	4.864196	58.36	PK2	34.2	0	-48.35	44.21	-	-	74	-29.79	214	123	V
	4.865427	46.58	MAv1	34.2	0	-48.28	32.5	54	-21.5	-	-	214	123	V
2	4.883817	58.01	PK2	34.2	0	-48.25	43.96	-	-	74	-30.04	120	199	H
	4.885092	46.54	MAv1	34.2	0	-48.28	32.46	54	-21.54	-	-	120	199	H
6	10.612737	56.82	PK2	38.1	0	-45.43	49.49	-	-	74	-24.51	321	317	V
	10.613534	44.96	MAv1	38.1	0	-45.38	37.68	54	-16.32	-	-	321	317	V
4	10.638509	45.07	MAv1	38	0	-45.46	37.61	54	-16.39	-	-	23	160	H
	10.640187	56.38	PK2	38	0	-45.36	49.02	-	-	74	-24.98	23	160	H

PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

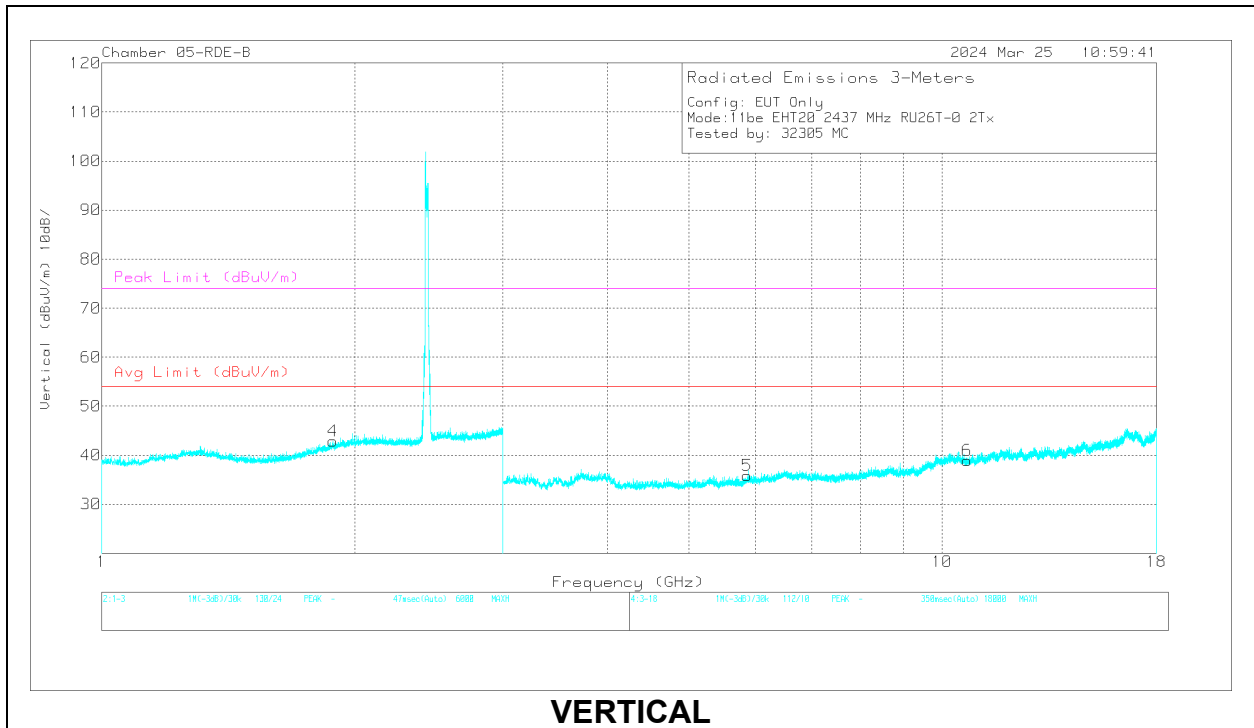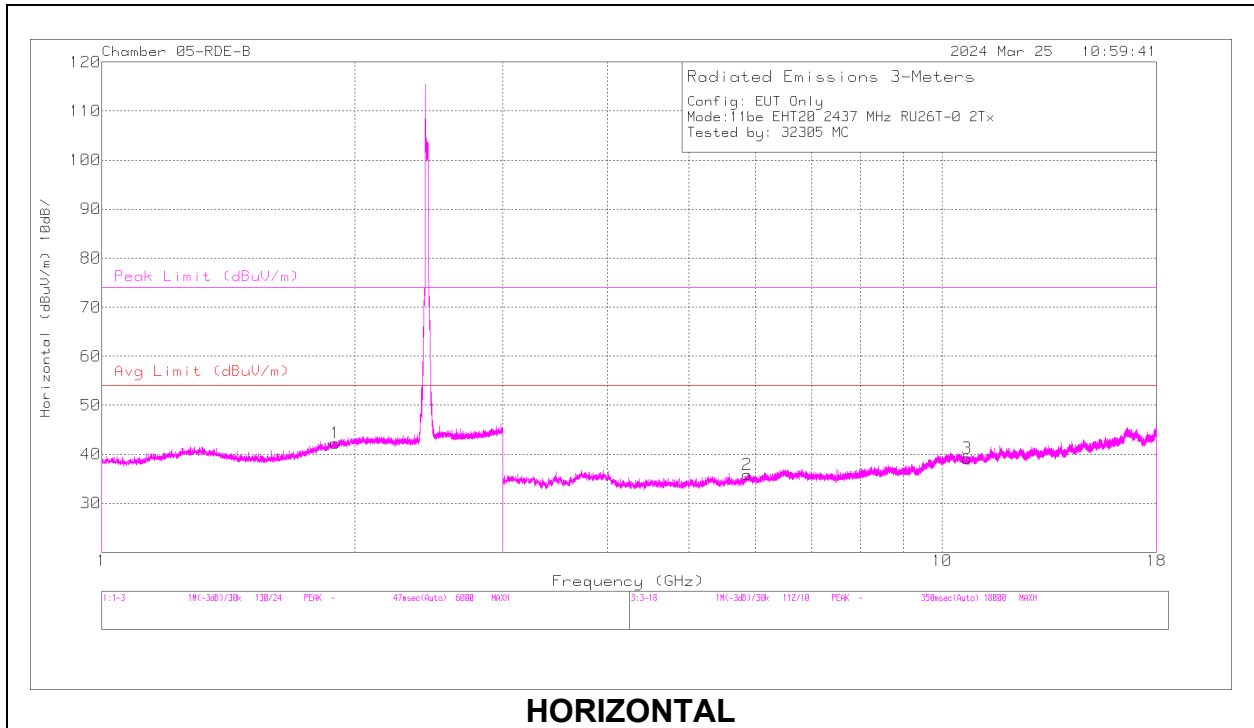


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.884907	61.75	PK2	31.1	0	-40.56	52.29	-	-	74	-21.71	284	225	V
	1.883582	50.02	MAv1	31.1	0	-40.64	40.48	-	-	-	-	284	225	V
1	1.899192	61.53	PK2	31.2	0	-40.69	52.04	-	-	74	-21.96	63	400	H
	1.897521	49.97	MAv1	31.2	0	-40.71	40.46	-	-	-	-	63	400	H
5	5.868374	57.81	PK2	35	0	-46.45	46.36	-	-	74	-27.64	332	309	V
	5.869312	45.31	MAv1	35	0	-46.46	33.85	-	-	-	-	332	309	V
2	5.868548	57.61	PK2	35	0	-46.46	46.15	-	-	74	-27.85	256	276	H
	5.870446	45.41	MAv1	35.1	0	-46.38	34.13	-	-	-	-	256	276	H
3	10.707924	56.53	PK2	38	0	-45.19	49.34	-	-	74	-24.66	332	362	H
	10.708725	44.56	MAv1	38.1	0	-45.34	37.32	54	-16.68	-	-	332	362	H
6	10.722852	56.02	PK2	38.1	0	-45.27	48.85	-	-	74	-25.15	336	312	V
	10.720303	44.73	MAv1	38.1	0	-45.24	37.59	54	-16.41	-	-	336	312	V

PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

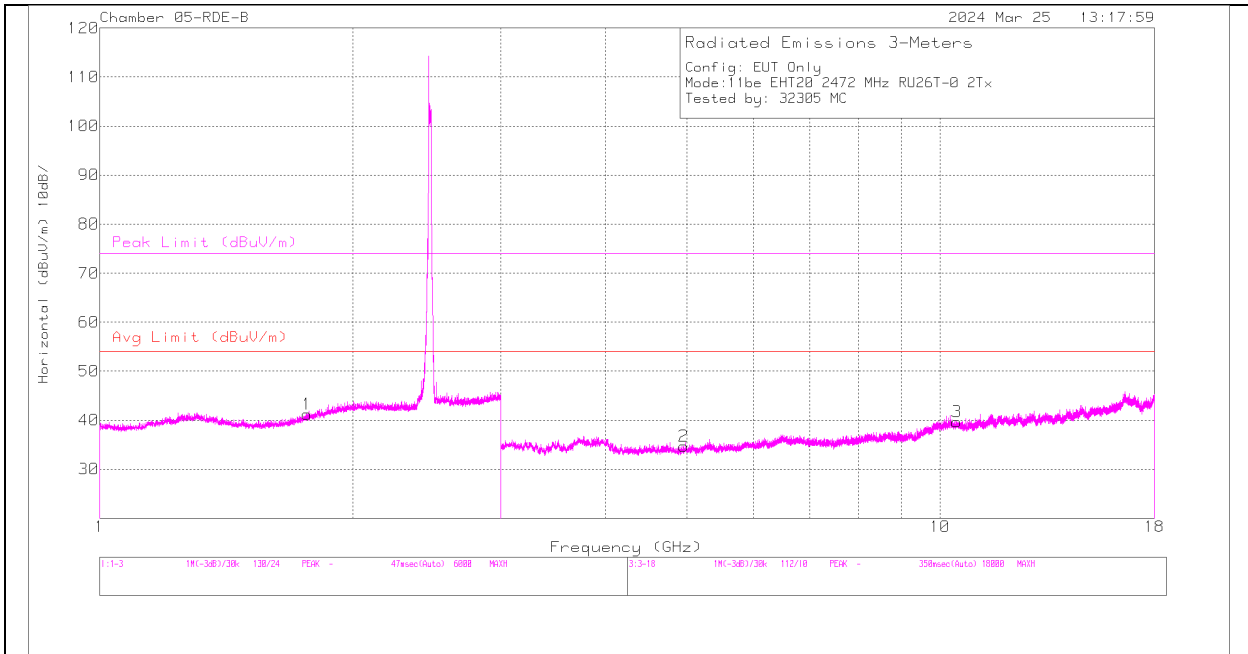

HORIZONTAL

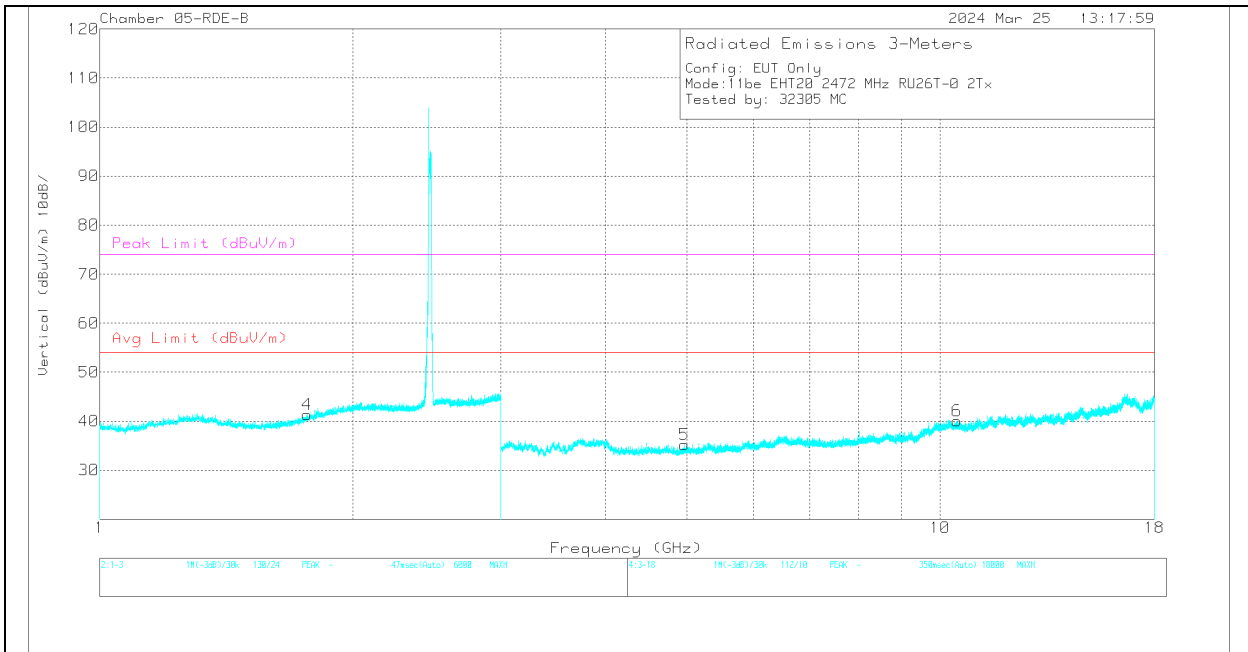

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.763667	61.91	PK2	29.8	0	-40.58	51.13	-	-	74	-22.87	236	318	V
	1.763708	50.37	MAv1	29.8	0	-40.58	39.59	-	-	-	-	236	318	V
1	1.764892	61.74	PK2	29.8	0	-40.61	50.93	-	-	74	-23.07	124	377	H
	1.766875	50.15	MAv1	29.8	0	-40.63	39.32	-	-	-	-	124	377	H
2	4.953335	58.43	PK2	34.2	0	-48.33	44.3	-	-	74	-29.7	235	213	H
	4.953999	47.02	MAv1	34.2	0	-48.23	32.99	54	-21.01	-	-	235	213	H
5	4.965892	46.92	MAv1	34.2	0	-48.16	32.96	54	-21.04	-	-	68	361	V
	4.965918	58.37	PK2	34.2	0	-48.16	44.41	-	-	74	-29.59	68	361	V
3	10.467954	57.21	PK2	38.1	0	-45.54	49.77	-	-	74	-24.23	335	155	H
	10.468122	45.86	MAv1	38.1	0	-45.56	38.4	-	-	-	-	335	155	H
6	10.472872	57.32	PK2	38.1	0	-45.85	49.57	-	-	74	-24.43	330	214	V
	10.473548	45.63	MAv1	38.1	0	-45.72	38.01	-	-	-	-	330	214	V

PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

2TX ANT 4 + ANT 3 OFDMA MODE: SU MODE

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

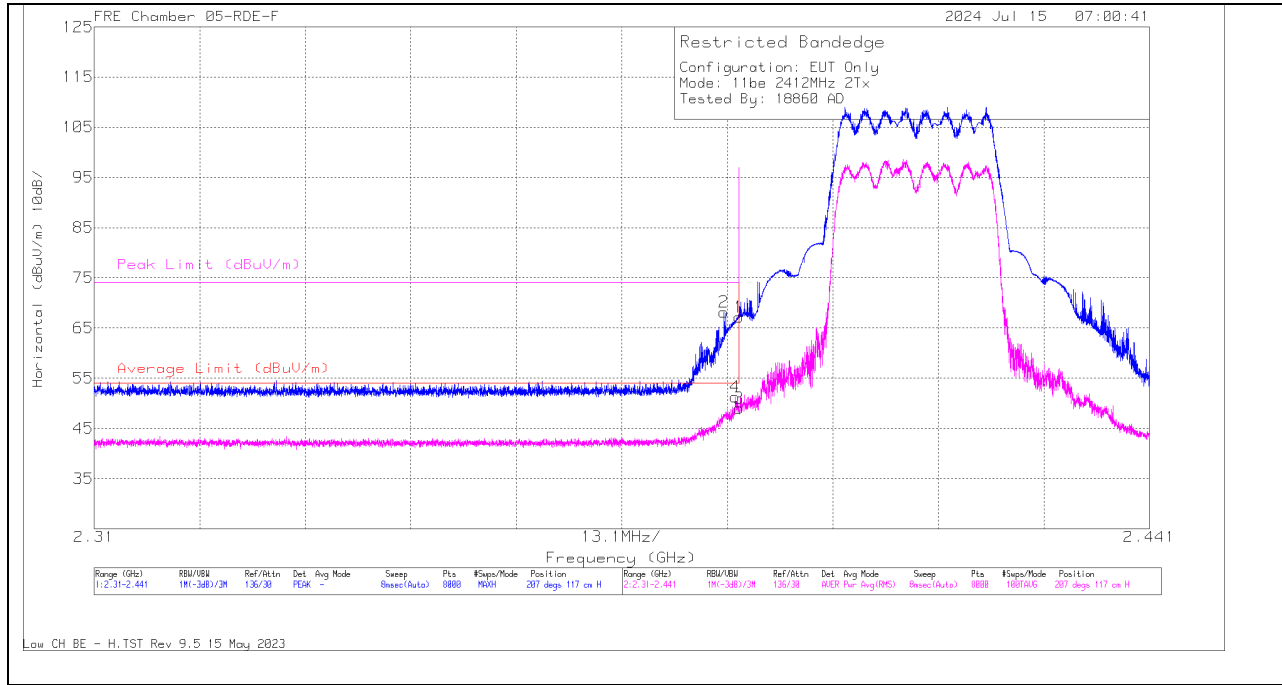

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	75.87	Pk	32	0	-40.67	67.2	-	-	74	-6.8	207	117	H
2	2.388184	76.8	Pk	32	0	-40.67	68.13	-	-	74	-5.87	207	117	H
3	2.39	57.17	RMS	32	.48	-40.67	48.98	54	-5.02	-	-	207	117	H
4	2.389576	59.45	RMS	32	.48	-40.67	51.26	54	-2.74	-	-	207	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

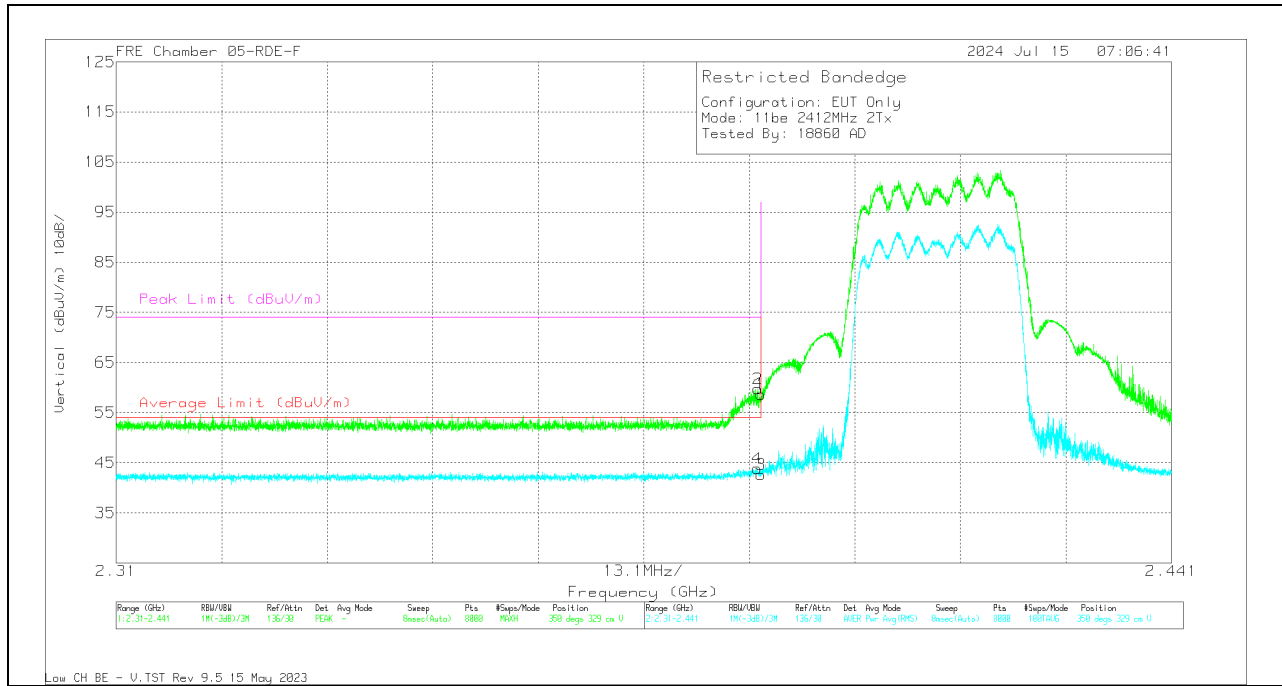


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	67.39	Pk	32	0	-40.67	58.72	-	-	74	-15.28	350	329	V
2	2.389625	68.4	Pk	32	0	-40.67	59.73	-	-	74	-14.27	350	329	V
3	2.39	50.79	RMS	32	.48	-40.67	42.6	54	-11.4	-	-	350	329	V
4	2.389543	52.03	RMS	32	.48	-40.67	43.84	54	-10.16	-	-	350	329	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)


HORIZONTAL RESULT

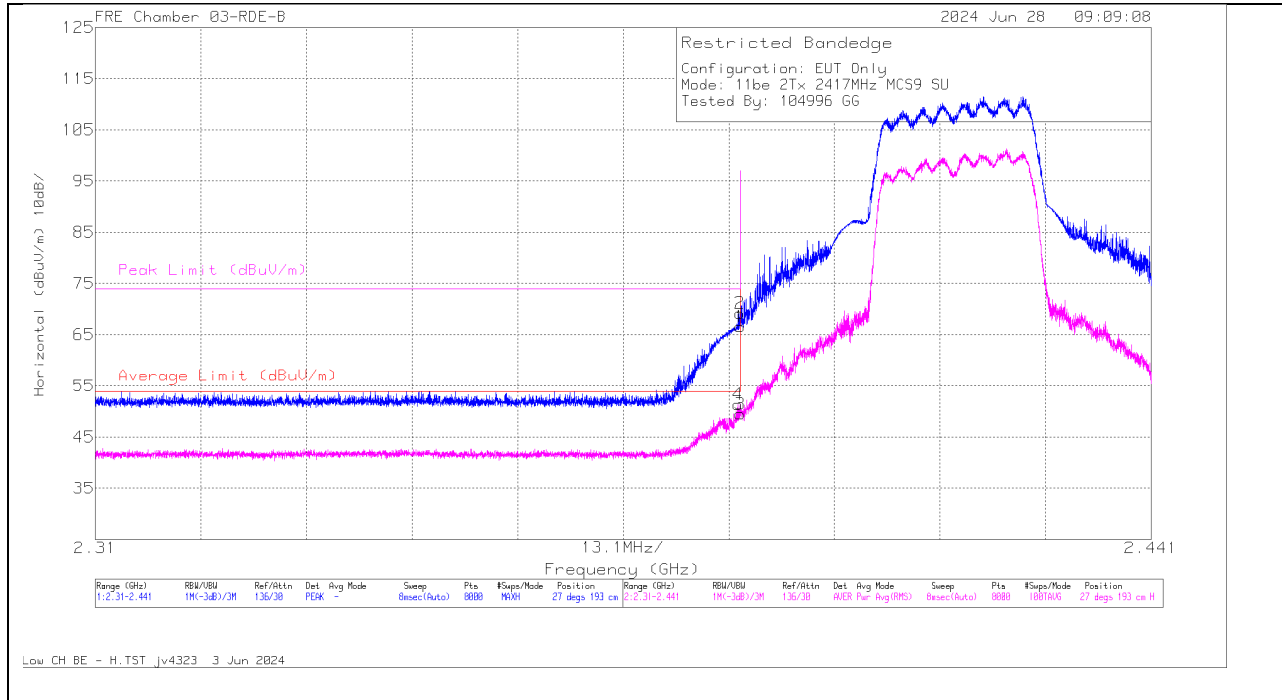

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	75.87	Pk	32.2	0	-41.5	66.57	-	-	74	-7.43	27	193	H
2	* 2.389953	78.49	Pk	32.2	0	-41.5	69.19	-	-	74	-4.81	27	193	H
3	* 2.39	58.31	RMS	32.2	.48	-41.5	49.49	54	-4.51	-	-	27	193	H
4	* 2.38974	60.2	RMS	32.2	.48	-41.5	51.38	54	-2.62	-	-	27	193	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

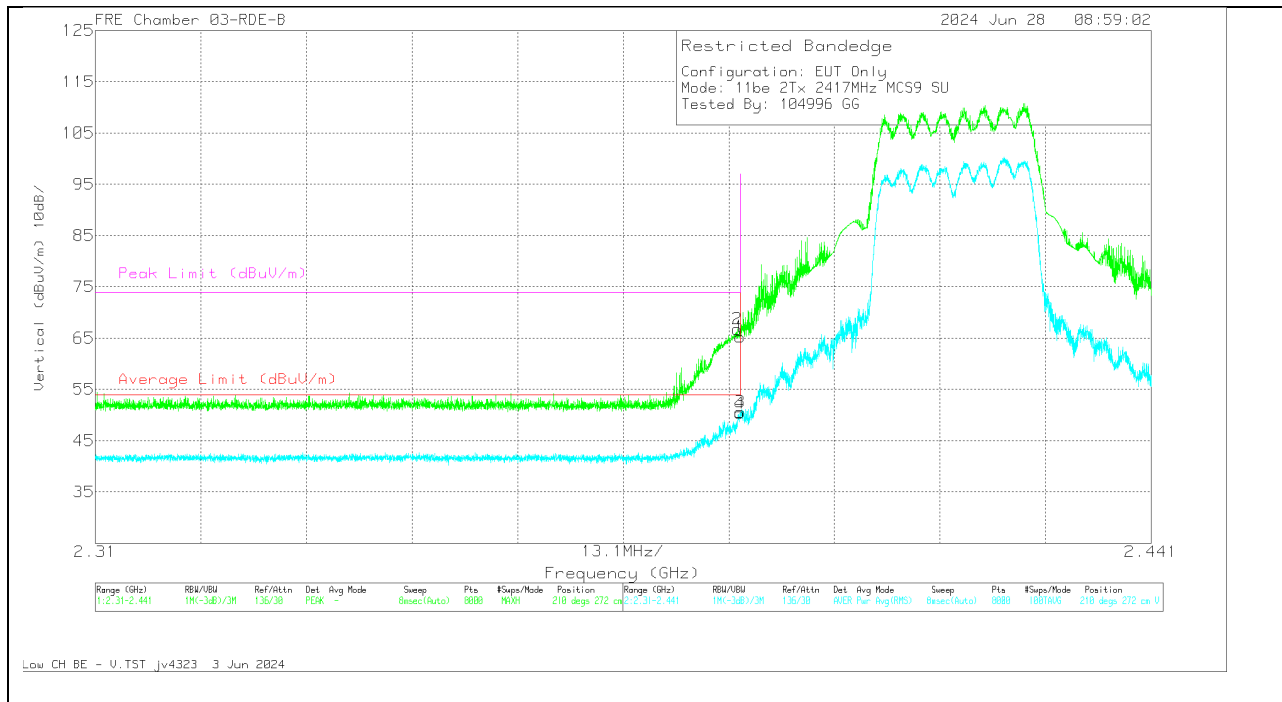


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	74.53	Pk	32.2	0	-41.5	65.23	-	-	74	-8.77	210	272	V
2	* 2.389658	76.07	Pk	32.2	0	-41.5	66.77	-	-	74	-7.23	210	272	V
3	* 2.39	59.4	RMS	32.2	.48	-41.5	50.58	54	-3.42	-	-	210	272	V
4	* 2.389953	59.18	RMS	32.2	.48	-41.5	50.36	54	-3.64	-	-	210	272	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

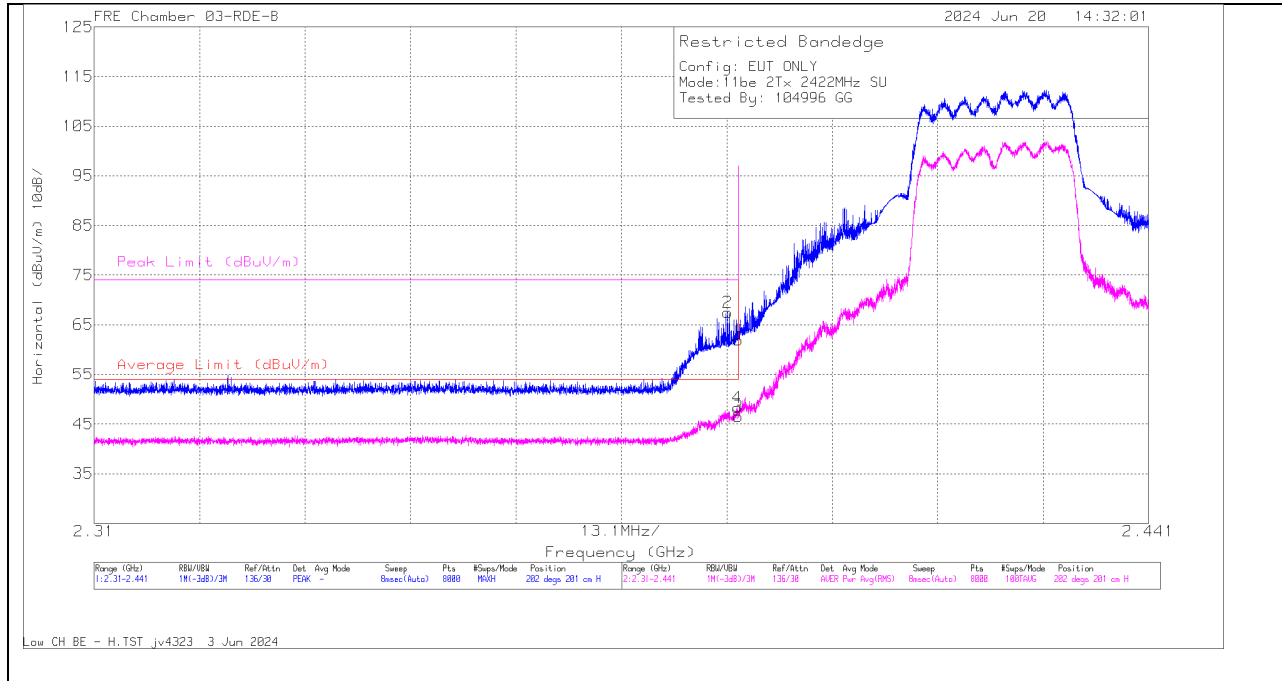

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	71.21	PK	32.2	0	-41.5	61.91	-	-	74	-12.09	202	201	H
2	* 2.388708	76.82	PK	32.2	0	-41.53	67.49	-	-	74	-6.51	202	201	H
3	* 2.39	55.34	RMS	32.2	.48	-41.5	46.52	54	-7.48	-	-	202	201	H
4	* 2.38992	57.11	RMS	32.2	.48	-41.5	48.29	54	-5.71	-	-	202	201	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

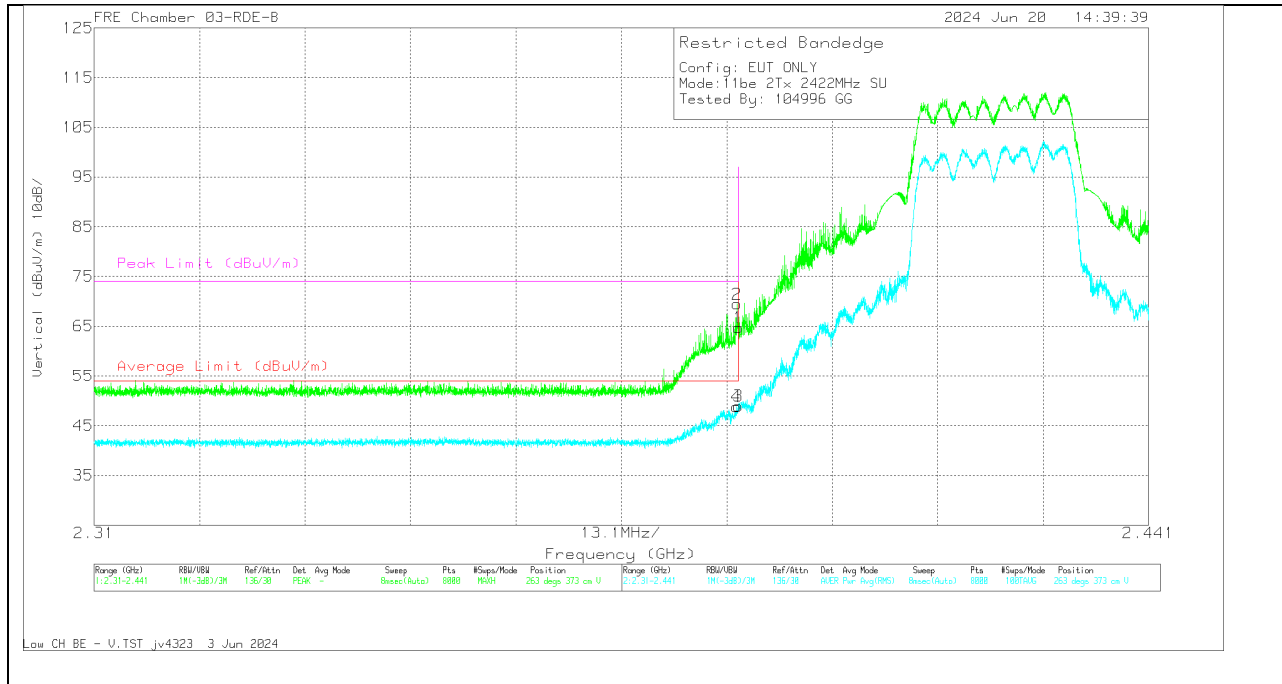


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	73.96	Pk	32.2	0	-41.5	64.68	-	-	74	-9.32	263	373	V
2	* 2.389854	78.74	Pk	32.2	0	-41.5	69.44	-	-	74	-4.56	263	373	V
3	* 2.39	57.73	RMS	32.2	.48	-41.5	48.91	54	-5.09	-	-	263	373	V
4	* 2.389838	57.6	RMS	32.2	.48	-41.5	48.78	54	-5.22	-	-	263	373	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

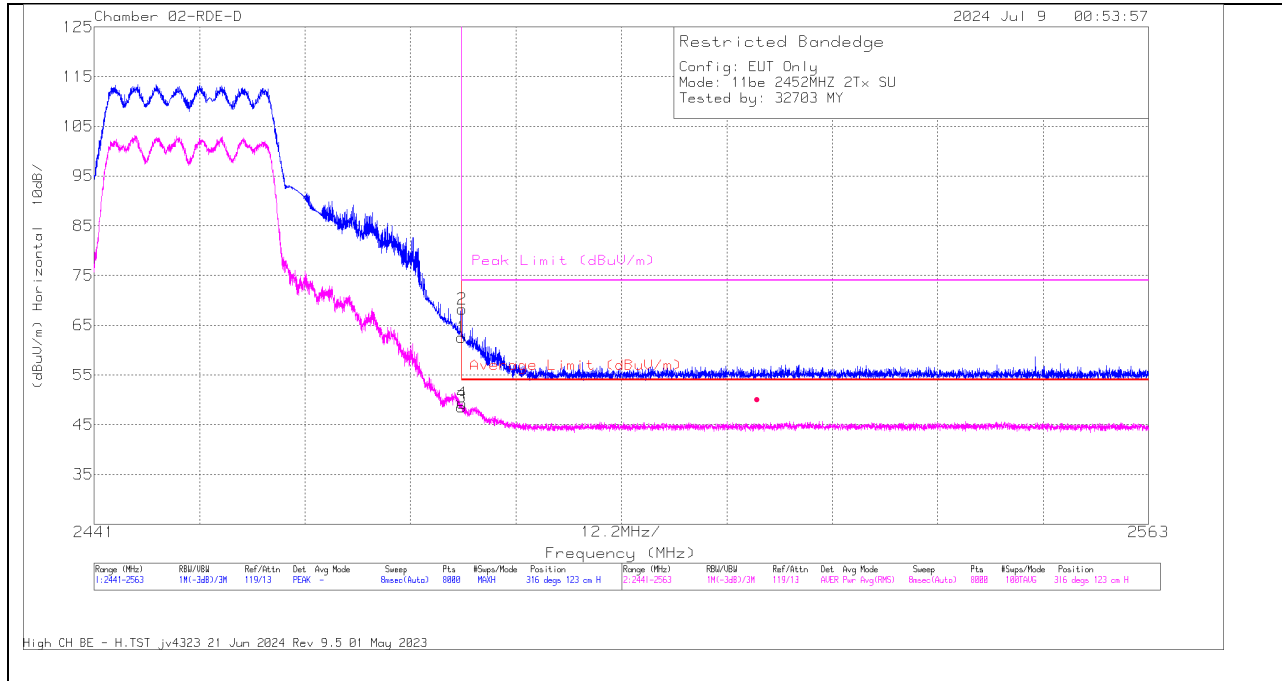

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF(dB/m)	Amp/Cb l (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	49.77	Pk	32.4	-19.6	0	62.57	-	-	74	-11.43	316	123	H
2	* 2483.584	55.47	Pk	32.4	-19.6	0	68.27	-	-	74	-5.73	316	123	H
3	* 2483.5	35.24	RMS	32.4	-19.6	.48	48.52	54	-5.48	-	-	316	123	H
4	* 2483.599	36.09	RMS	32.4	-19.6	.48	49.37	54	-4.63	-	-	316	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

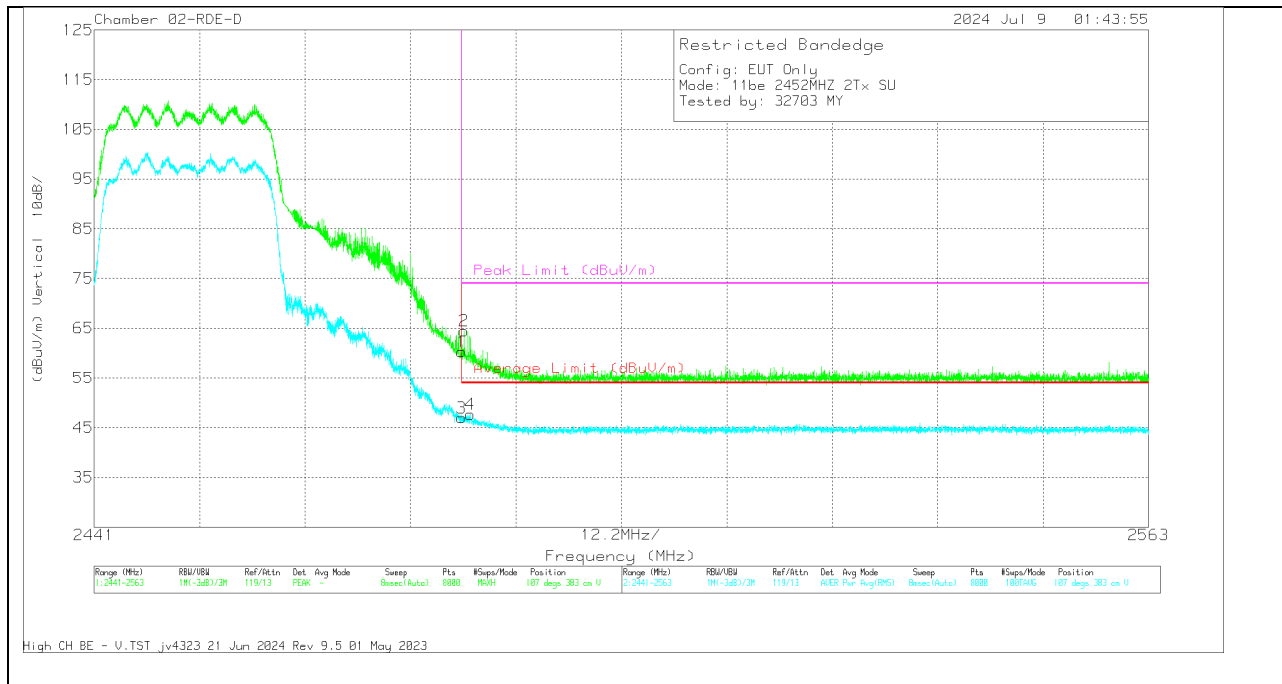


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	200896 ACF(dB/m)	Amp/Cb I (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	47.44	Pk	32.4	-19.6	0	60.24	-	-	74	-13.76	107	383	V
2	* 2483.812	51.67	Pk	32.4	-19.6	0	64.47	-	-	74	-9.53	107	383	V
3	* 2483.5	33.71	RMS	32.4	-19.6	.48	46.99	54	-7.01	-	-	107	383	V
4	* 2484.56	34.29	RMS	32.4	-19.5	.48	47.67	54	-6.33	-	-	107	383	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)


HORIZONTAL RESULT

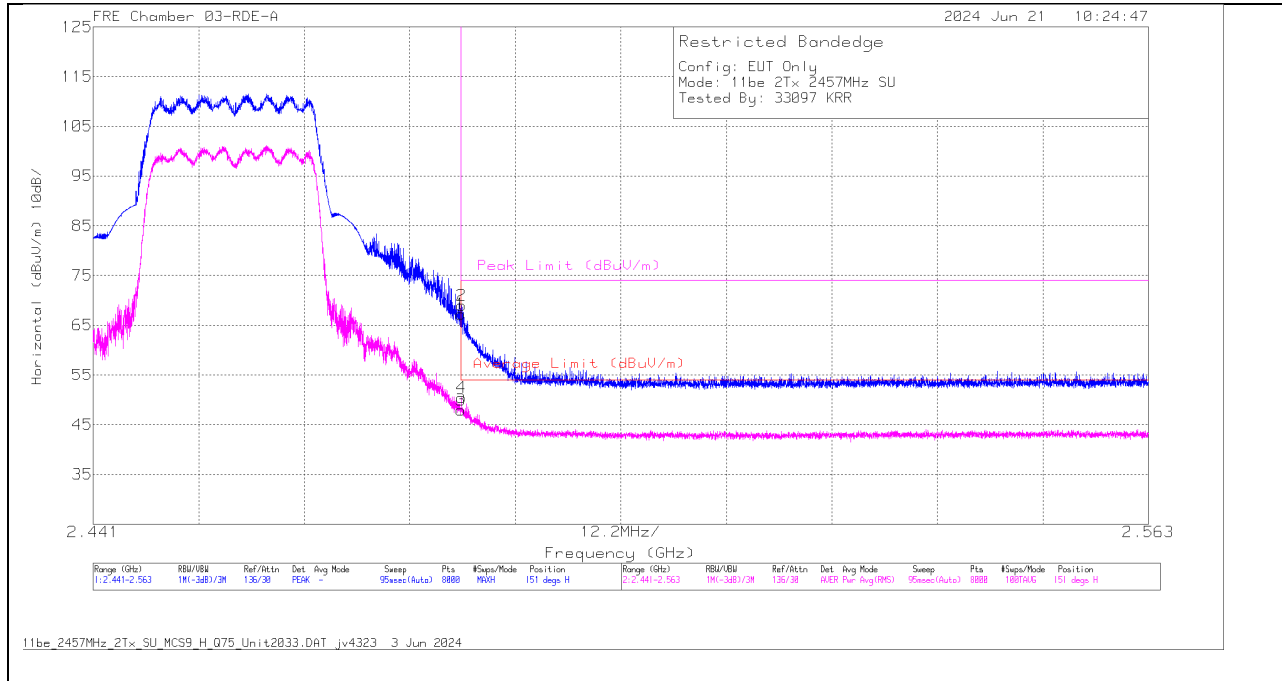

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.88	PK	32.2	0	-39.84	67.24	-	-	74	-6.76	151	113	H
2	* 2.483614	76.58	PK	32.2	0	-39.83	68.95	-	-	74	-5.05	151	113	H
3	* 2.4835	55.12	RMS	32.2	.48	-39.84	47.96	54	-6.04	-	-	151	113	H
4	* 2.483568	57.56	RMS	32.2	.48	-39.83	50.41	54	-3.59	-	-	151	113	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

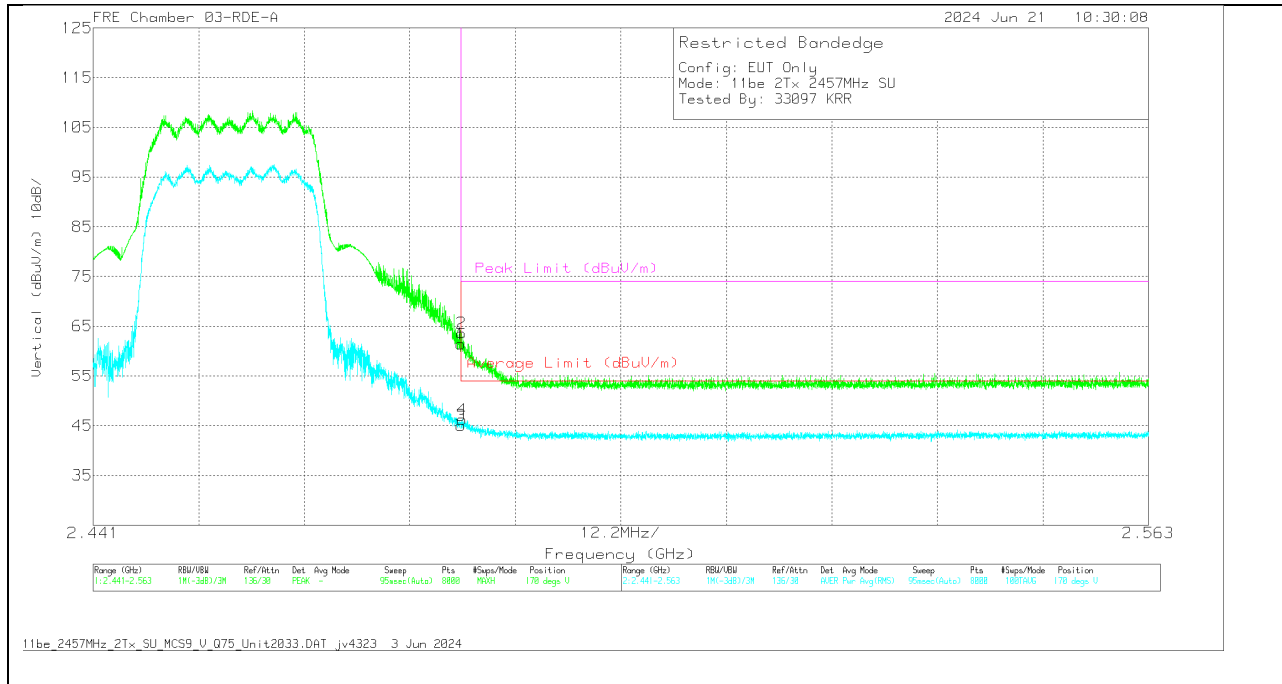


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	69.11	Pk	32.2	0	-39.84	61.47	-	-	74	-12.53	170	375	V
2	* 2.483568	71.26	Pk	32.2	0	-39.83	63.63	-	-	74	-10.37	170	375	V
3	* 2.4835	52.16	RMS	32.2	.48	-39.84	45	54	-9	-	-	170	375	V
4	* 2.48366	53.38	RMS	32.2	.48	-39.83	46.23	54	-7.77	-	-	170	375	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

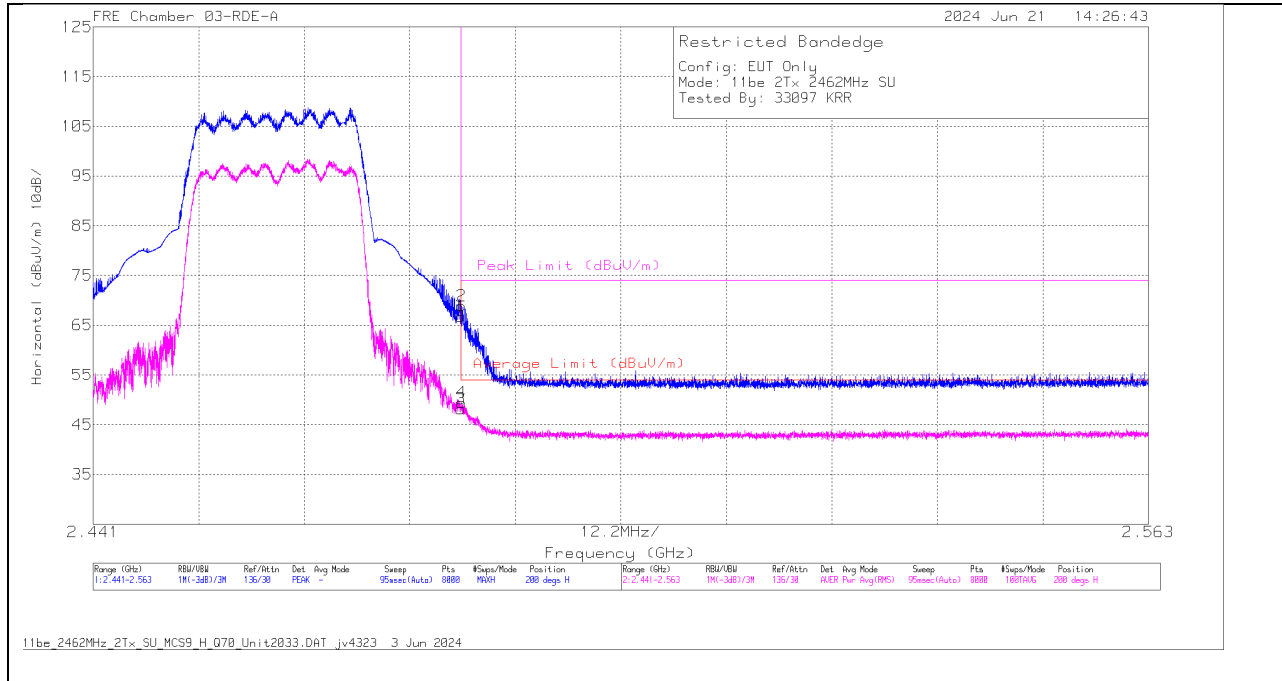

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	74.39	PK	32.2	0	-39.84	66.75	-	-	74	-7.25	200	117	H
2	* 2.483568	76.56	PK	32.2	0	-39.83	68.93	-	-	74	-5.07	200	117	H
3	* 2.4835	55.37	RMS	32.2	.48	-39.84	48.21	54	-5.79	-	-	200	117	H
4	* 2.483568	56.64	RMS	32.2	.48	-39.83	49.49	54	-4.51	-	-	200	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

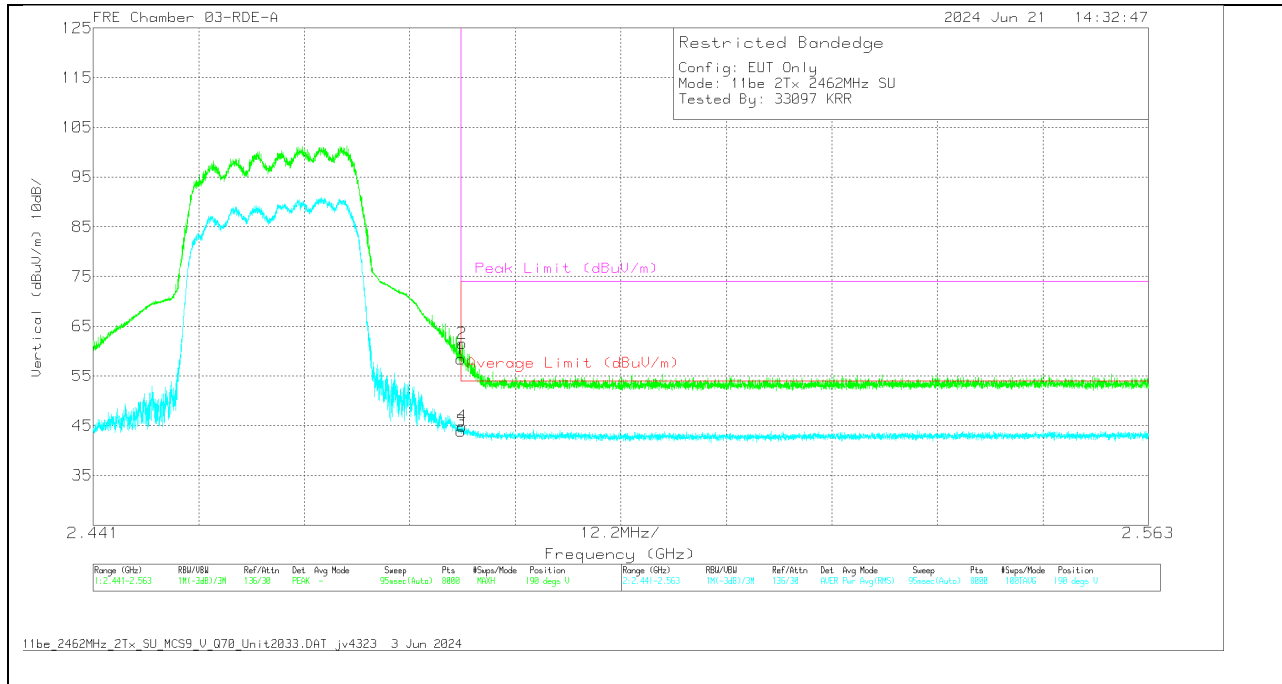


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	66.09	Pk	32.2	0	-39.84	58.45	-	-	74	-15.55	190	361	V
2	* 2.48366	69.14	Pk	32.2	0	-39.83	61.51	-	-	74	-12.49	190	361	V
3	* 2.4835	51.04	RMS	32.2	.48	-39.84	43.88	54	-10.12	-	-	190	361	V
4	* 2.483675	52.03	RMS	32.2	.48	-39.83	44.88	54	-9.12	-	-	190	361	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)


HORIZONTAL RESULT

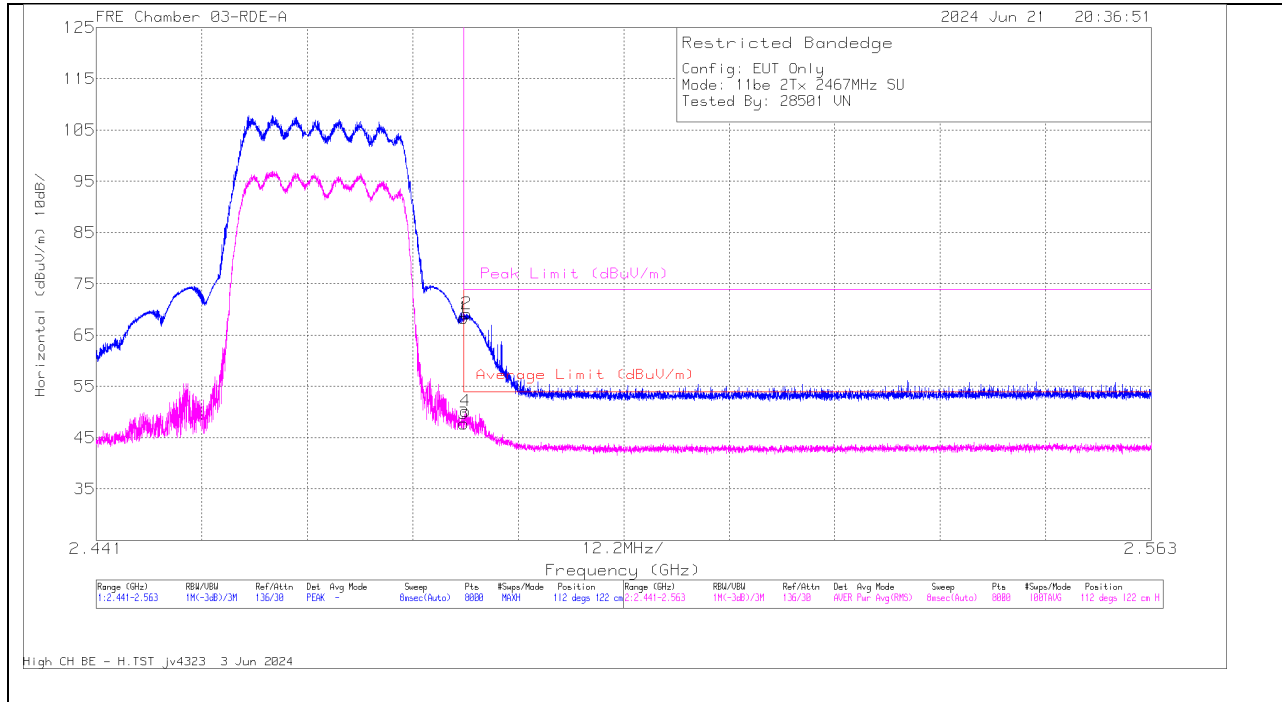

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	76.02	Pk	32.2	0	-39.84	68.38	-	-	74	-5.62	112	122	H
2	* 2.483828	76.82	Pk	32.2	0	-39.83	69.19	-	-	74	-4.81	112	122	H
3	* 2.4835	54.9	RMS	32.2	.48	-39.84	47.74	54	-6.26	-	-	112	122	H
4	* 2.48369	57.36	RMS	32.2	.48	-39.83	50.21	54	-3.79	-	-	112	122	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

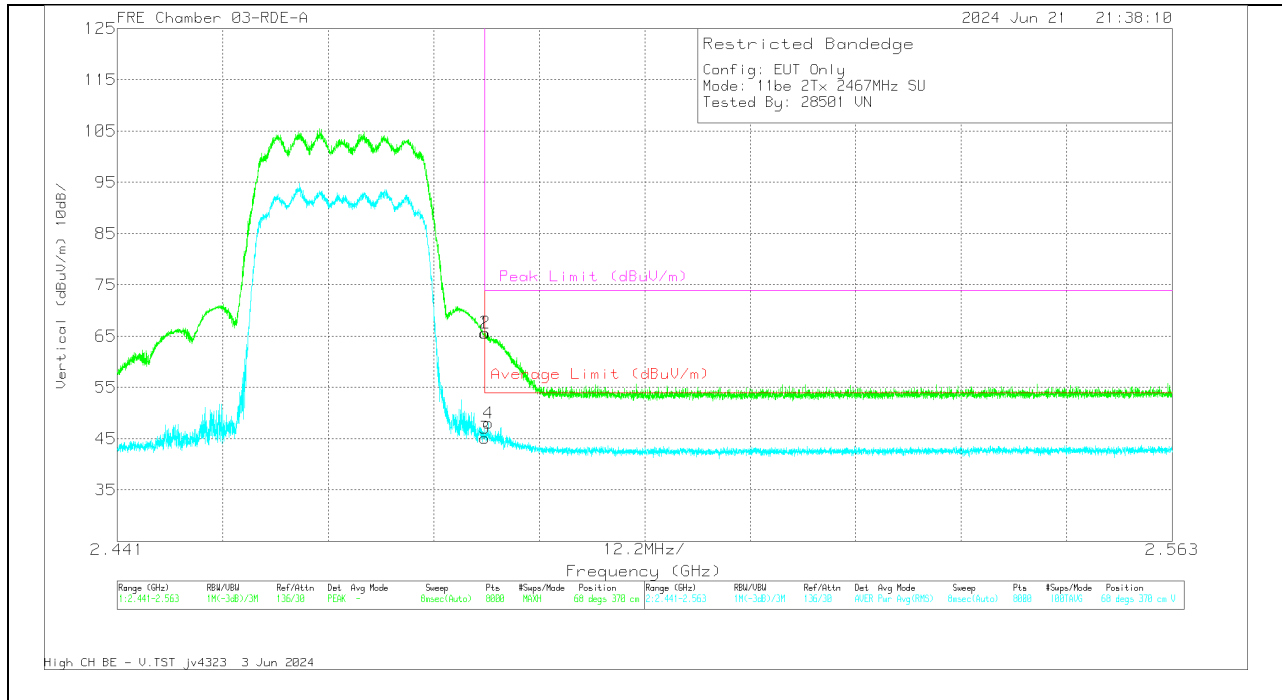


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226673 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.21	Pk	32.2	0	-39.84	65.57	-	-	74	-8.43	68	370	V
2	* 2.483568	73.25	Pk	32.2	0	-39.83	65.62	-	-	74	-8.38	68	370	V
3	* 2.4835	52.3	RMS	32.2	.48	-39.84	45.14	54	-8.86	-	-	68	370	V
4	* 2.483919	55.18	RMS	32.2	.48	-39.83	48.03	54	-5.97	-	-	68	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)


HORIZONTAL RESULT

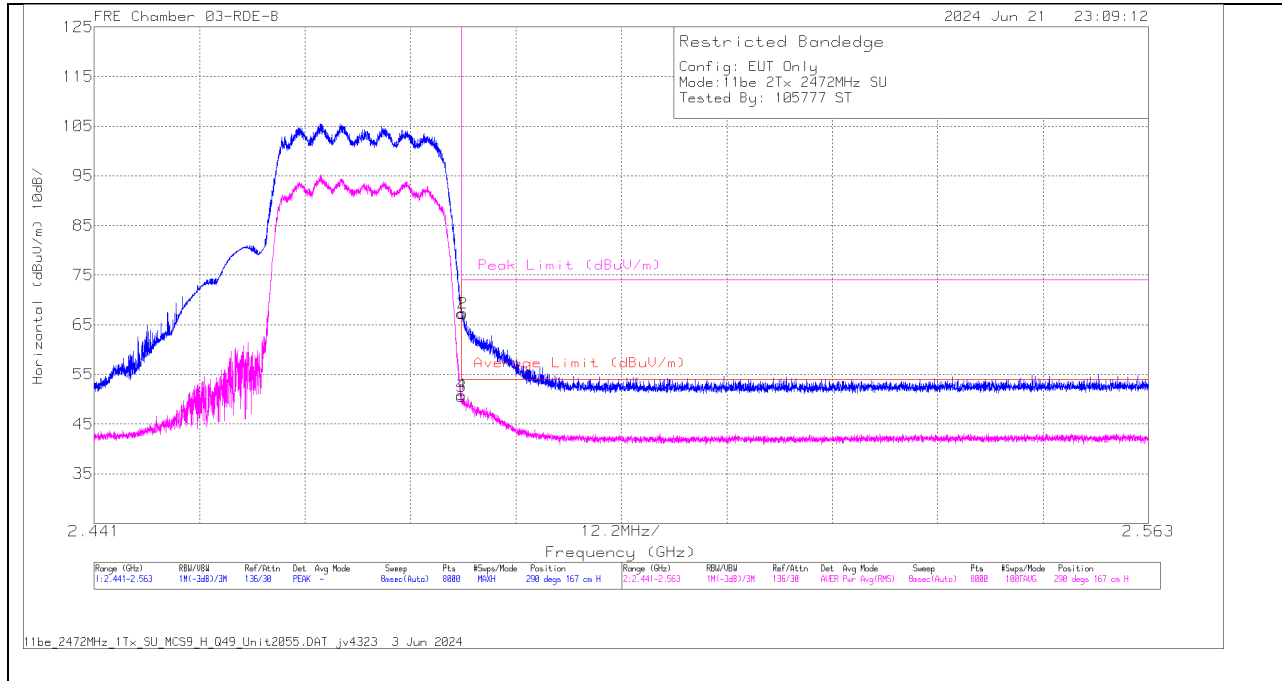

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	76.48	PK	32.2	0	-41.5	67.18	-	-	74	-6.82	290	167	H
2	* 2.48369	76.6	PK	32.2	0	-41.5	67.3	-	-	74	-6.7	290	167	H
3	* 2.4835	59.44	RMS	32.2	.48	-41.5	50.62	54	-3.38	-	-	290	167	H
4	* 2.483507	59.71	RMS	32.2	.48	-41.5	50.89	54	-3.11	-	-	290	167	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT


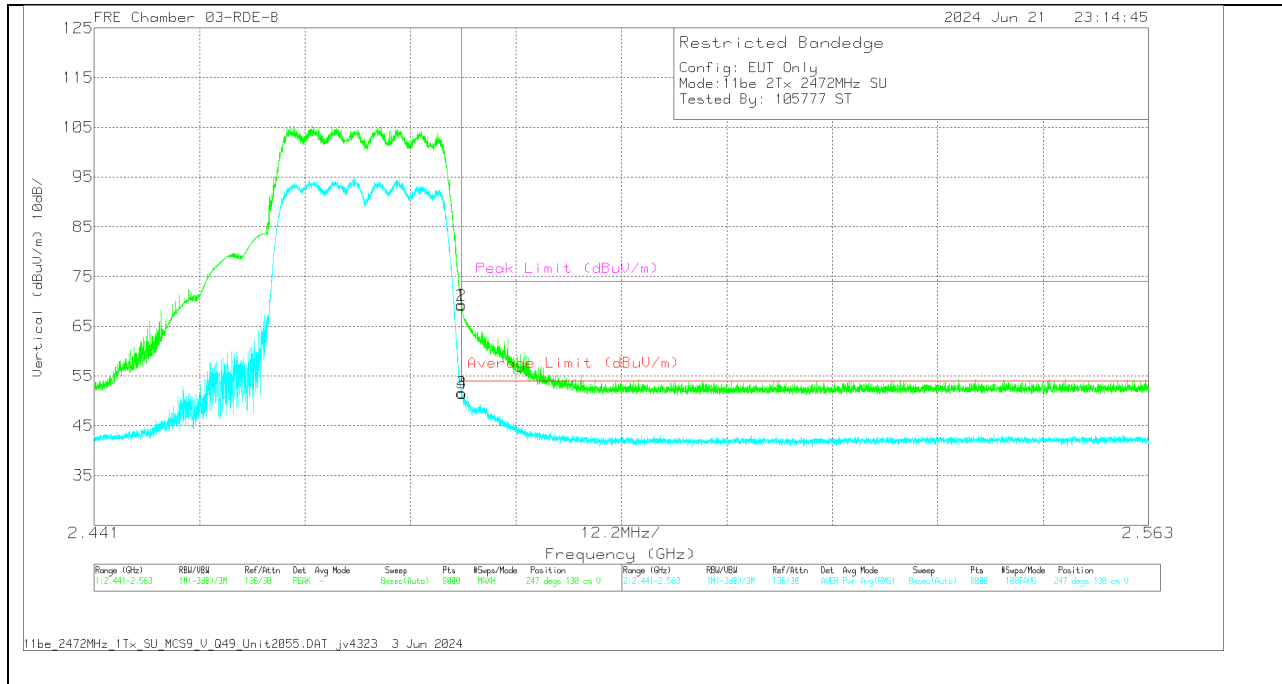


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	78.61	Pk	32.2	0	-41.5	69.31	-	-	74	-4.69	247	130	V
2	* 2.483507	78.43	Pk	32.2	0	-41.5	69.13	-	-	74	-4.87	247	130	V
3	* 2.4835	60.38	RMS	32.2	.48	-41.5	51.56	54	-2.44	-	-	247	130	V
4	* 2.483553	60.32	RMS	32.2	.48	-41.5	51.5	54	-2.5	-	-	247	130	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.1.9. 11be, SU 2TX HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

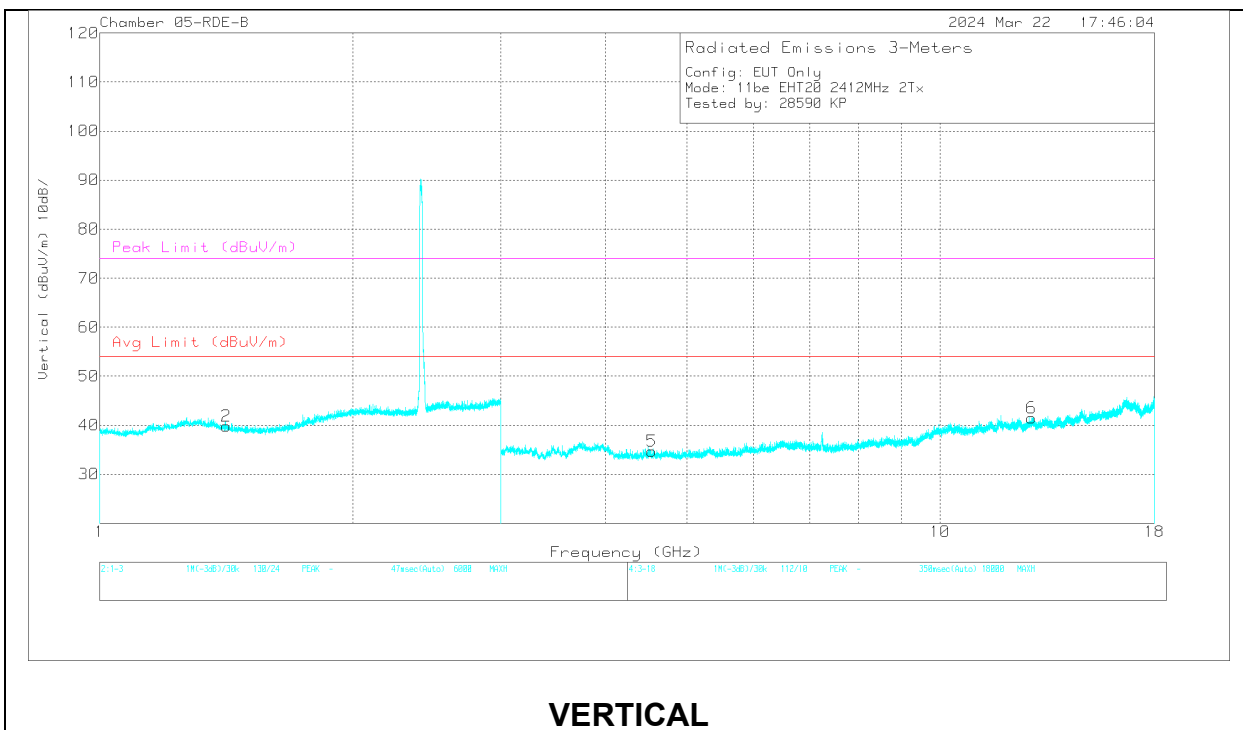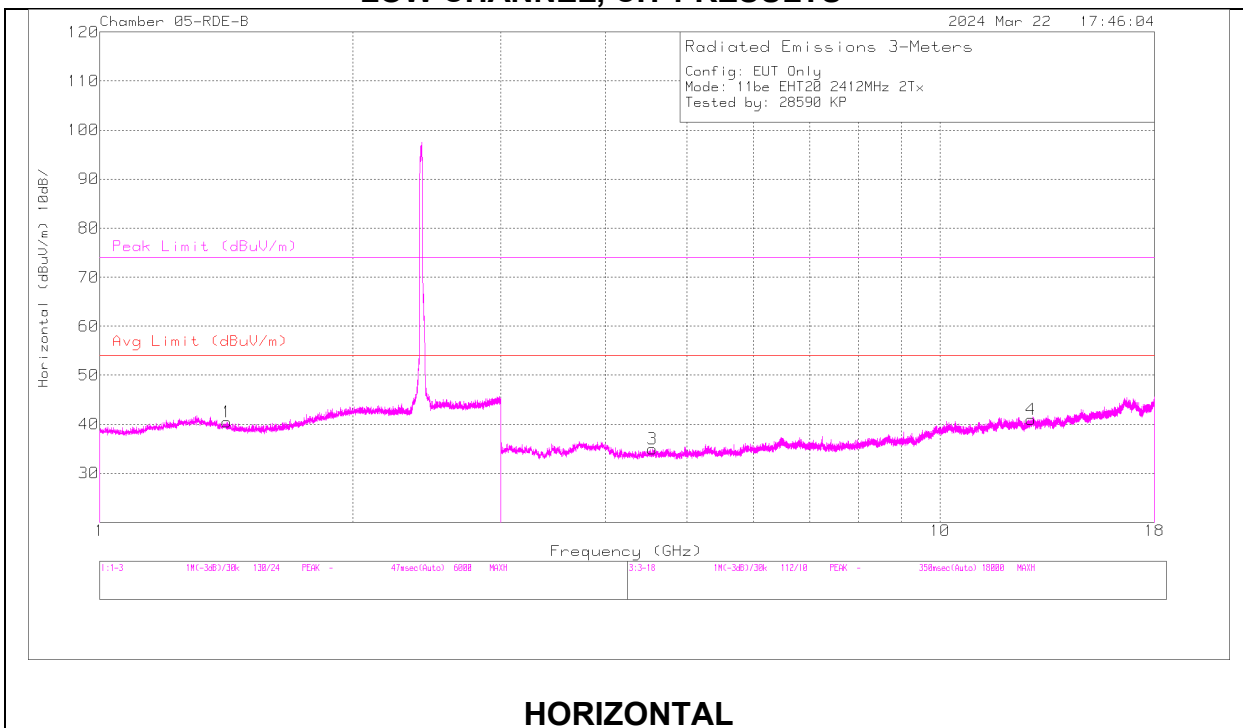

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.414999	61.96	PK2	28.7	-40.38	50.28	-	-	74	-23.72	0	101	H
	* 1.417813	50.18	MAv1	28.6	-40.38	38.4	54	-15.6	-	-	0	101	H
2	* 1.412436	61.8	PK2	28.7	-40.38	50.12	-	-	74	-23.88	0	199	V
	* 1.411683	50.11	MAv1	28.7	-40.38	38.43	54	-15.57	-	-	0	199	V
3	* 4.547708	58.01	PK2	34.4	-48.19	44.22	-	-	74	-29.78	0	101	H
	* 4.545789	46.7	MAv1	34.4	-48.08	33.02	54	-20.98	-	-	0	101	H
5	* 4.536728	57.95	PK2	34.4	-48	44.35	-	-	74	-29.65	0	200	V
	* 4.535779	46.49	MAv1	34.4	-47.98	32.91	54	-21.09	-	-	0	200	V
4	12.833911	53.9	PK2	39.2	-43.13	49.97	-	-	74	-24.03	0	101	H
	12.833303	42.49	MAv1	39.2	-43.05	38.64	-	-	-	-	0	101	H
6	12.862849	54.83	PK2	39.2	-42.95	51.08	-	-	74	-22.92	0	200	V
	12.863278	42.91	MAv1	39.2	-42.91	39.2	-	-	-	-	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

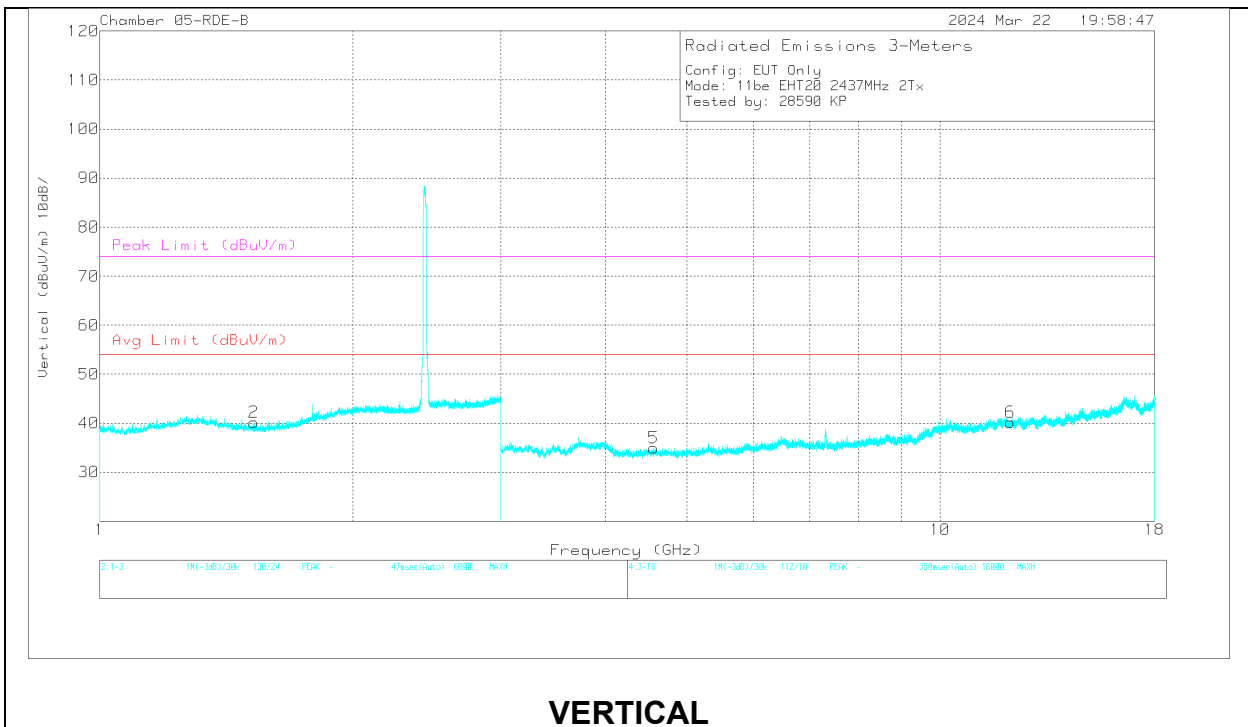
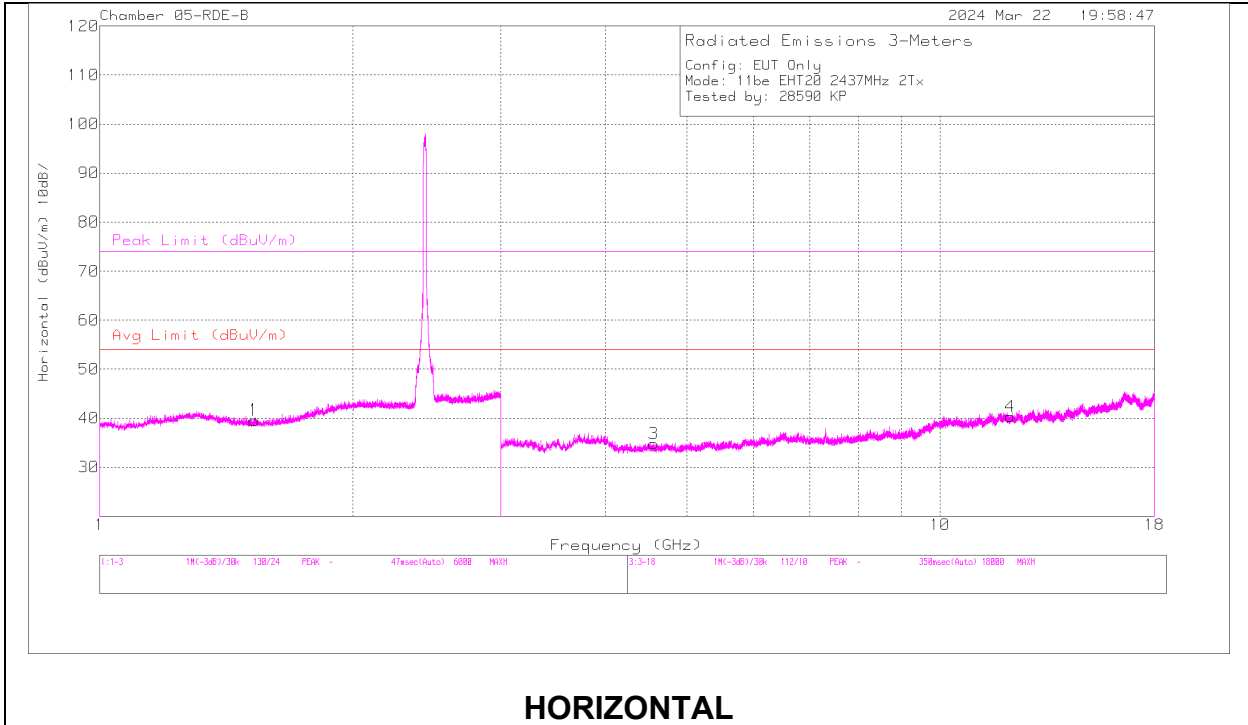


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.526056	61.93	PK2	28.2	0	-40.23	49.9	-	-	74	-24.1	0	199	H
	* 1.528098	49.8	MAv1	28.2	0	-40.2	37.8	54	-16.2	-	-	0	199	H
4	* 1.523516	61.3	PK2	28.3	0	-40.34	49.26	-	-	74	-24.74	0	101	V
	* 1.523299	49.79	MAv1	28.3	0	-40.36	37.73	54	-16.27	-	-	0	101	V
2	* 4.561632	58.34	PK2	34.4	0	-48.01	44.73	-	-	74	-29.27	0	101	H
	* 4.561994	46.67	MAv1	34.4	0	-47.99	33.08	54	-20.92	-	-	0	101	H
3	* 12.128409	54.58	PK2	39.3	0	-43.62	50.26	-	-	74	-23.74	0	198	H
	* 12.127138	42.89	MAv1	39.3	0	-43.82	38.37	54	-15.63	-	-	0	198	H
5	* 4.563565	58.32	PK2	34.4	0	-48.01	44.71	-	-	74	-29.29	0	200	V
	* 4.562849	46.73	MAv1	34.4	0	-48.03	33.1	54	-20.9	-	-	0	200	V
6	* 12.132747	54.44	PK2	39.3	0	-43.54	50.2	-	-	74	-23.8	0	101	V
	* 12.132344	42.84	MAv1	39.3	0	-43.59	38.55	54	-15.45	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

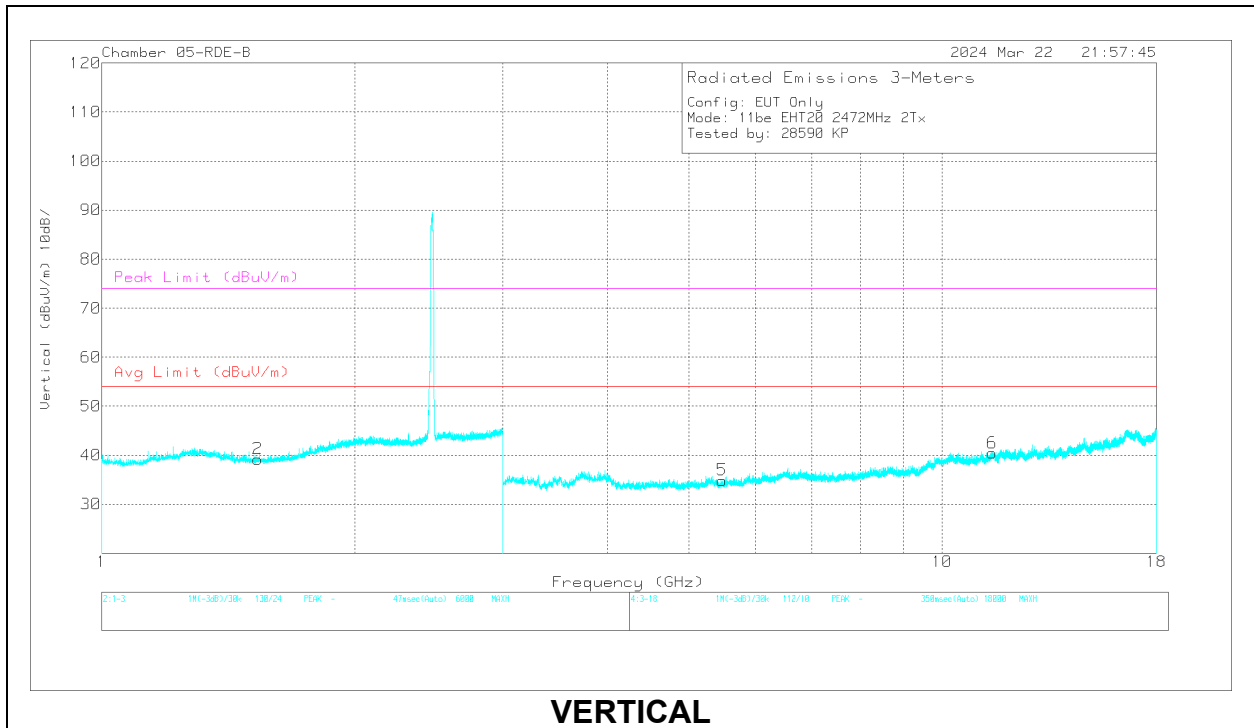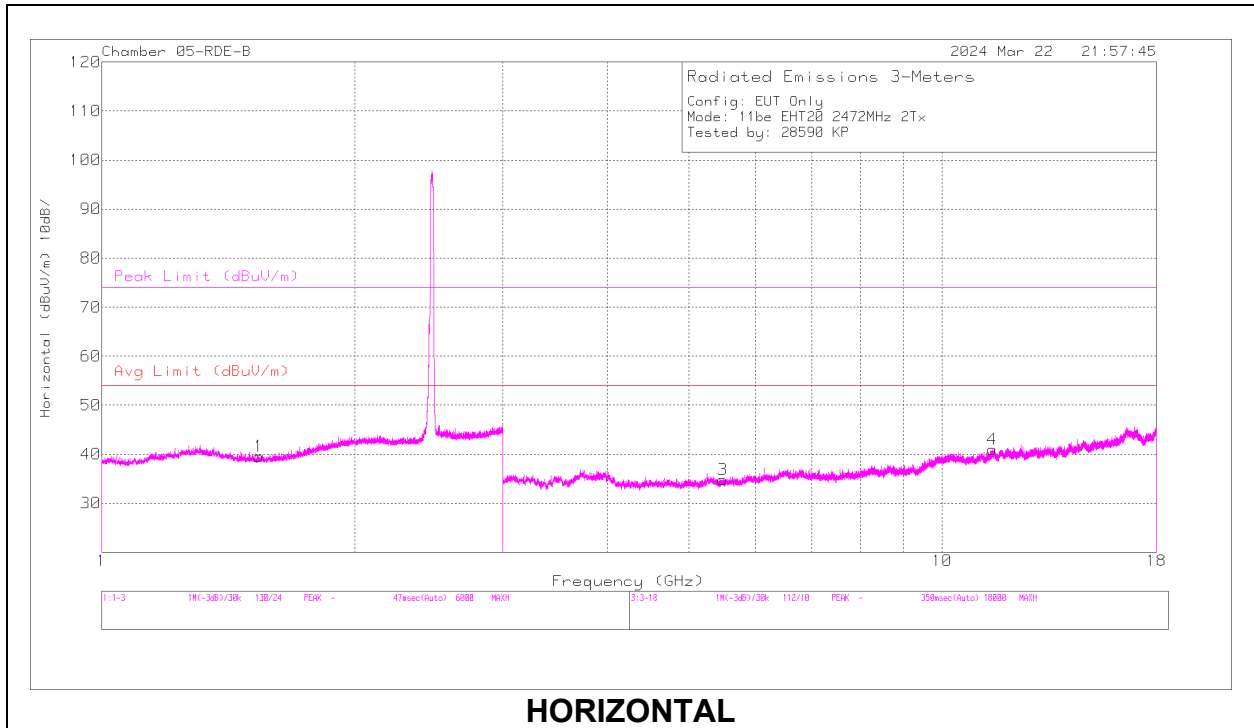


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.540615	61.51	PK2	28.3	0	-40.41	49.4	-	-	74	-24.6	0	101	H
	* 1.537749	50.02	MAv1	28.3	0	-40.47	37.85	54	-16.15	-	-	0	101	H
4	* 1.536105	61.31	PK2	28.3	0	-40.28	49.33	-	-	74	-24.67	0	200	V
	* 1.535422	49.8	MAv1	28.3	0	-40.26	37.84	54	-16.16	-	-	0	200	V
3	*	55.89	PK2	38.4	0	-43.72	50.57	-	-	74	-23.43	0	101	H
	11.474134	*												
	*	44.22	MAv1	38.4	0	-43.73	38.89	54	-15.11	-	-	0	101	H
	11.472102	*												
6	*	55.82	PK2	38.4	0	-43.64	50.58	-	-	74	-23.42	0	199	V
	11.485654	*												
	*	44.11	MAv1	38.4	0	-43.66	38.85	54	-15.15	-	-	0	199	V
	11.483766	*												
5	5.475701	57.81	PK2	34.7	0	-47.44	45.07	-	-	74	-28.93	0	101	V
	5.477209	46.04	MAv1	34.7	0	-47.4	33.34	-	-	-	-	0	101	V
2	5.484958	57.71	PK2	34.7	0	-47.51	44.9	-	-	74	-29.1	0	101	H
	5.486431	45.86	MAv1	34.7	0	-47.53	33.03	-	-	-	-	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

10.2. WORST CASE BELOW 1 GHz

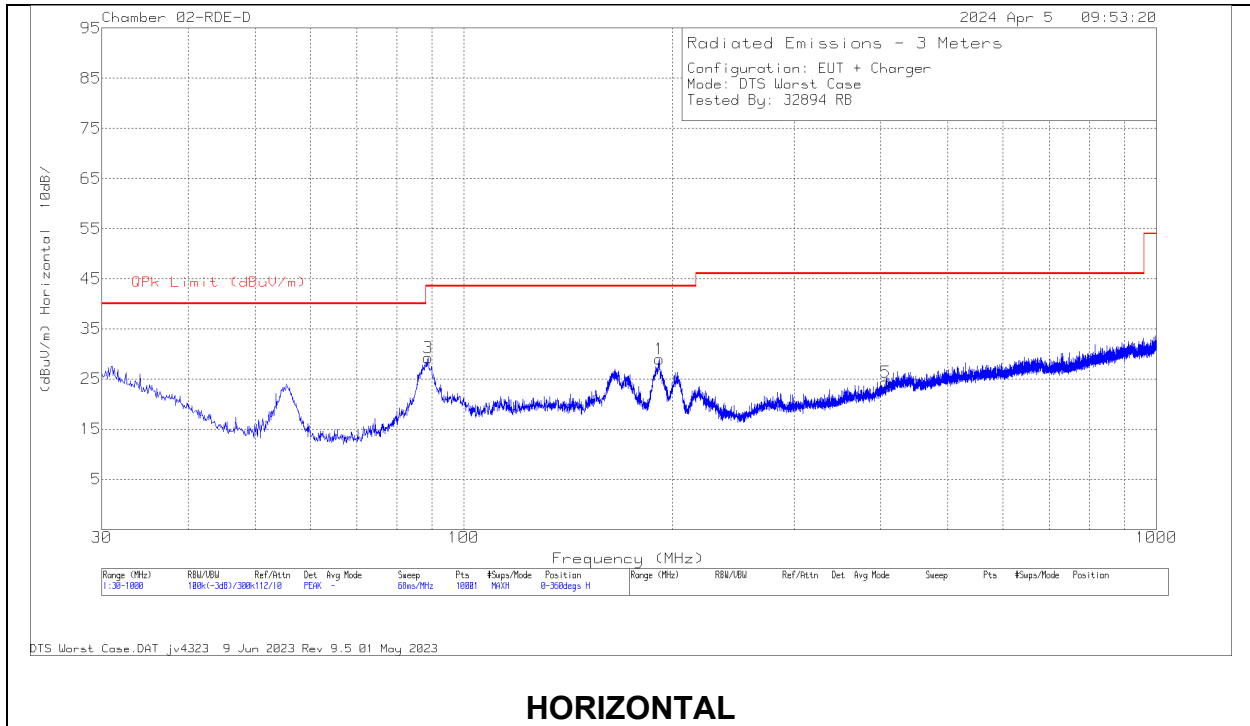

HORIZONTAL

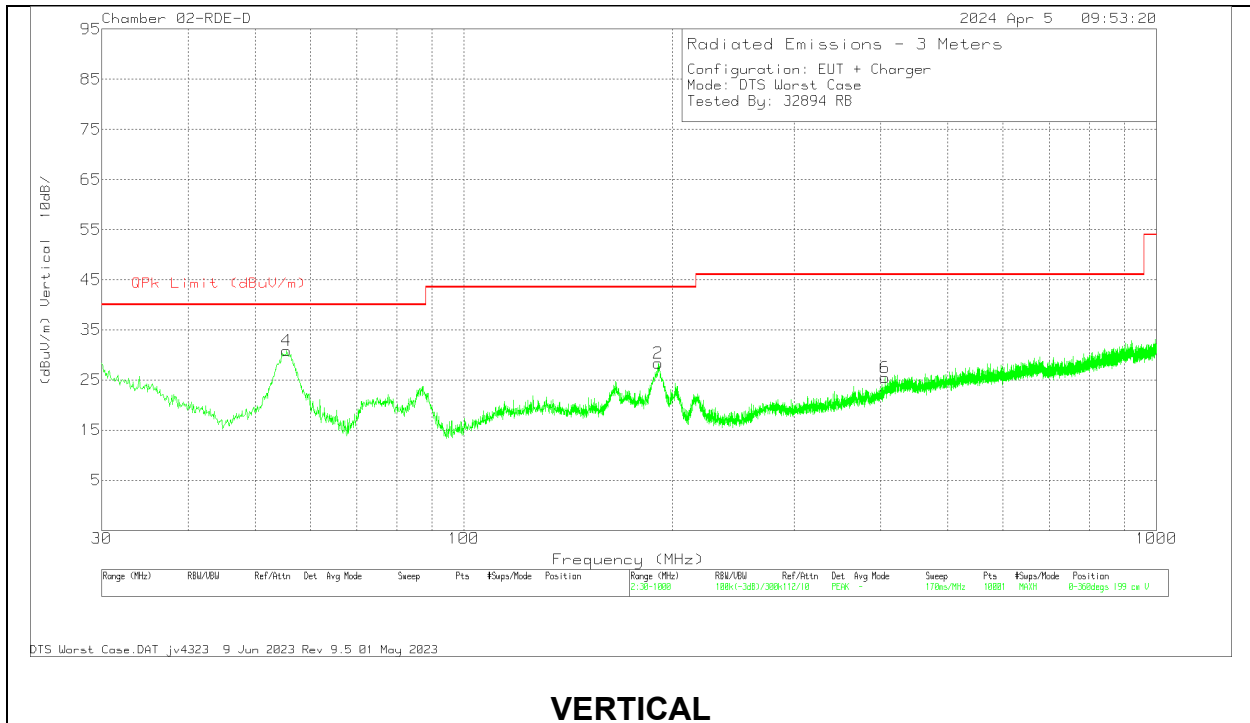

VERTICAL

Below 1GHz DATA



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85151 ACF (dB/m)	Cbl(dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 406.36	31.2	Pk	21.7	-28.5	24.4	46.02	-21.62	0-360	299	H
6	* 405.681	32.29	Pk	21.7	-28.5	25.49	46.02	-20.53	0-360	100	V
4	55.511	48.81	Pk	13.2	-31.1	30.91	40	-9.09	217	112	V
	55.511	38.89	Qp	13.2	-31	21.09	40	-18.91	217	112	V
3	88.782	46.25	Pk	13.7	-30.7	29.25	43.52	-14.27	0-360	299	H
2	190.923	40.67	Pk	17.3	-29.6	28.37	43.52	-15.15	0-360	199	V
1	191.505	41.35	Pk	17.4	-29.8	28.95	43.52	-14.57	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

10.3. WORST CASE 18-26 GHz

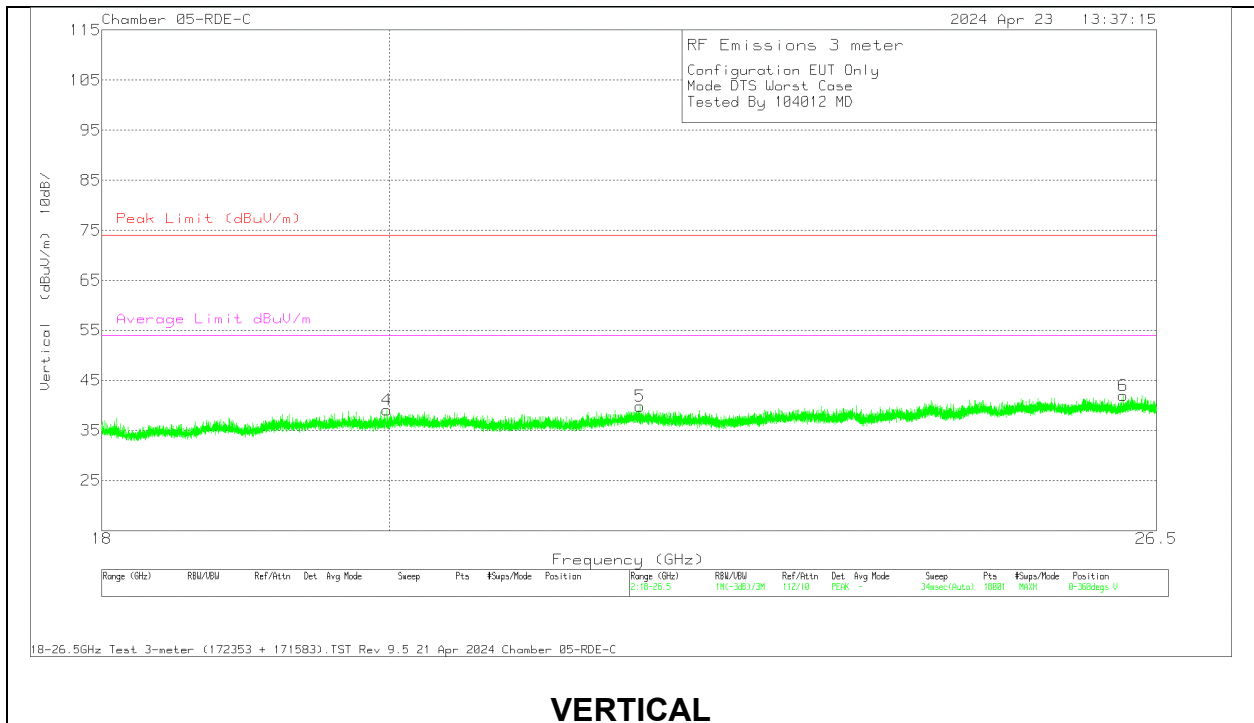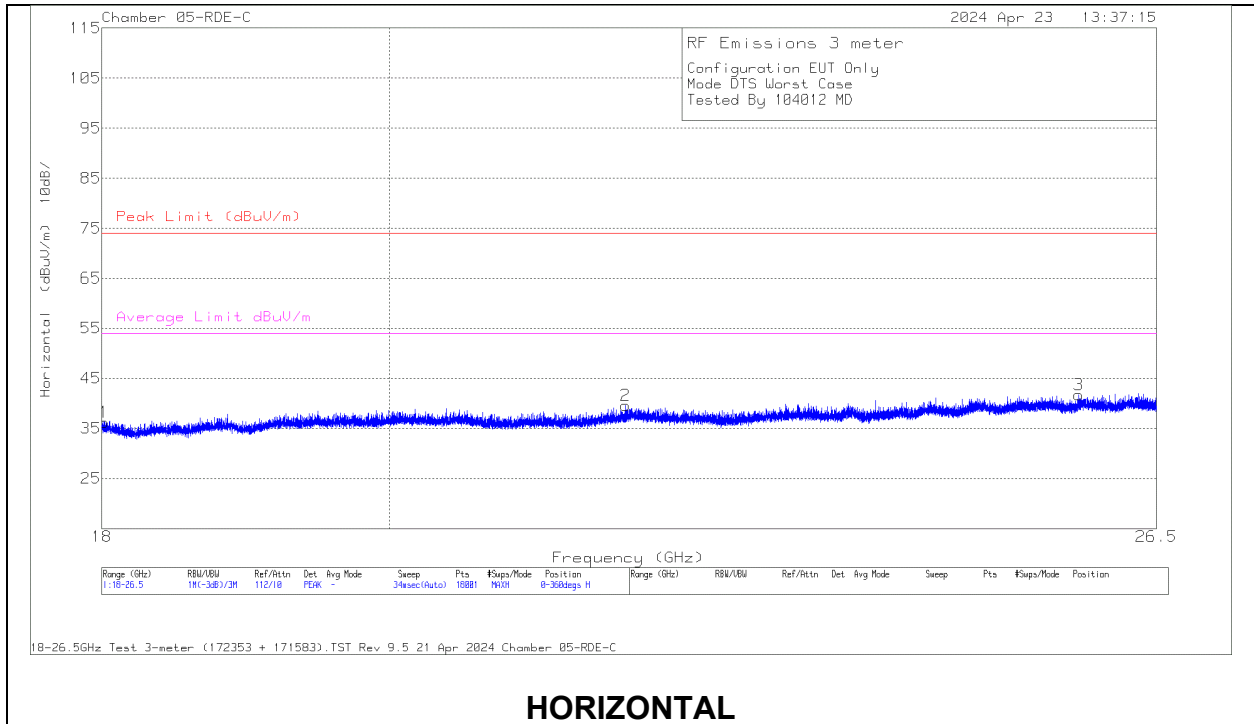

18 – 26GHz DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172353 ACF (dB/m) - 3mH	171583 Amp Assembly (dB)	Cables (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	18.017	57.85	Pk	32.8	-66.8	12.4	36.25	74	-37.75	54	-17.75	0-360	101	H
4	19.985694	57.5	Pk	33.1	-64.5	13	39.1	74	-34.9	54	-14.9	0-360	101	V
2	21.814137	57.37	Pk	33.6	-65	13.6	39.57	74	-34.43	54	-14.43	0-360	101	H
5	21.926526	57.7	Pk	33.7	-65.2	13.7	39.9	74	-34.1	54	-14.1	0-360	199	V
3	25.753413	55.43	Pk	34.6	-63.2	14.9	41.73	74	-32.27	54	-12.27	0-360	101	H
6	26.176996	55.37	Pk	34.7	-63.1	15	41.97	74	-32.03	54	-12.03	0-360	101	V

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1.1. AC POWER LINE WITH LAPTOP


LINE 1 RESULTS

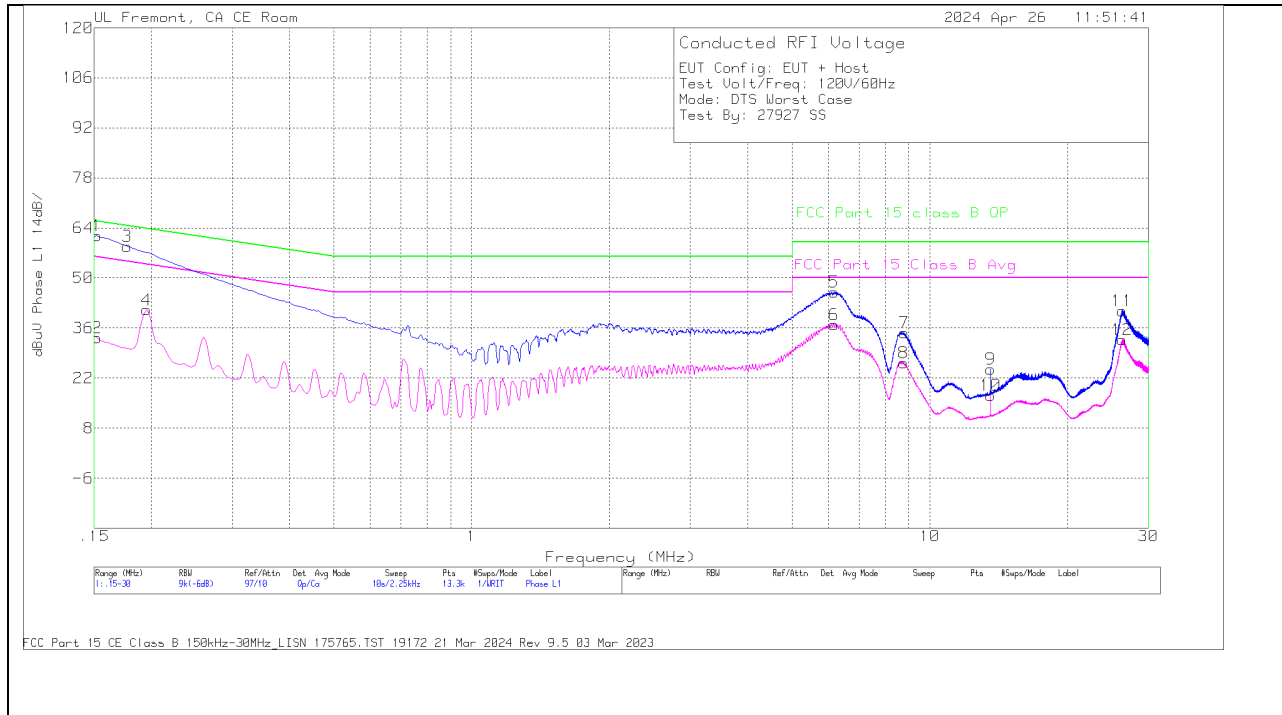

Range 1: Phase L1 .15 - 30MHz													
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trms Limiter (dB)	10 dB Pad	DCCF (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B QP dBuV	Margin (dB)
2	.1523	13.72	Ca	0	.1	9.5	10	0	33.32	55.88	-22.56	-	-
4	.195	21.46	Ca	.1	.1	9.4	10	0	41.06	53.82	-12.76	-	-
6	6.1755	17.37	Ca	.2	0	9.4	10	0	36.97	50	-13.03	-	-
8	8.7765	6.73	Ca	.2	0	9.3	10	0	26.23	50	-23.77	-	-
10	13.56	-2.78	Ca	.3	.1	9.5	10	0	17.12	50	-32.88	-	-
12	26.3018	12.78	Ca	.3	.2	9.4	10	0	32.68	50	-17.32	-	-
1	.1523	42.21	Qp	0	.1	9.5	10	0	61.81	-	-	65.88	-4.07
3	.177	39.29	Qp	.1	.1	9.4	10	0	58.89	-	-	64.63	-5.74
5	6.1744	26.48	Qp	.2	0	9.4	10	0	46.08	-	-	60	-13.92
7	8.7788	15.14	Qp	.2	0	9.3	10	0	34.64	-	-	60	-25.36
9	13.56	4.65	Qp	.3	.1	9.5	10	0	24.55	-	-	60	-35.45
11	26.2995	20.86	Qp	.3	.2	9.4	10	0	40.76	-	-	60	-19.24

Qp - Quasi-Peak detector
 Ca - CISPR average detection

LINE 2 RESULTS

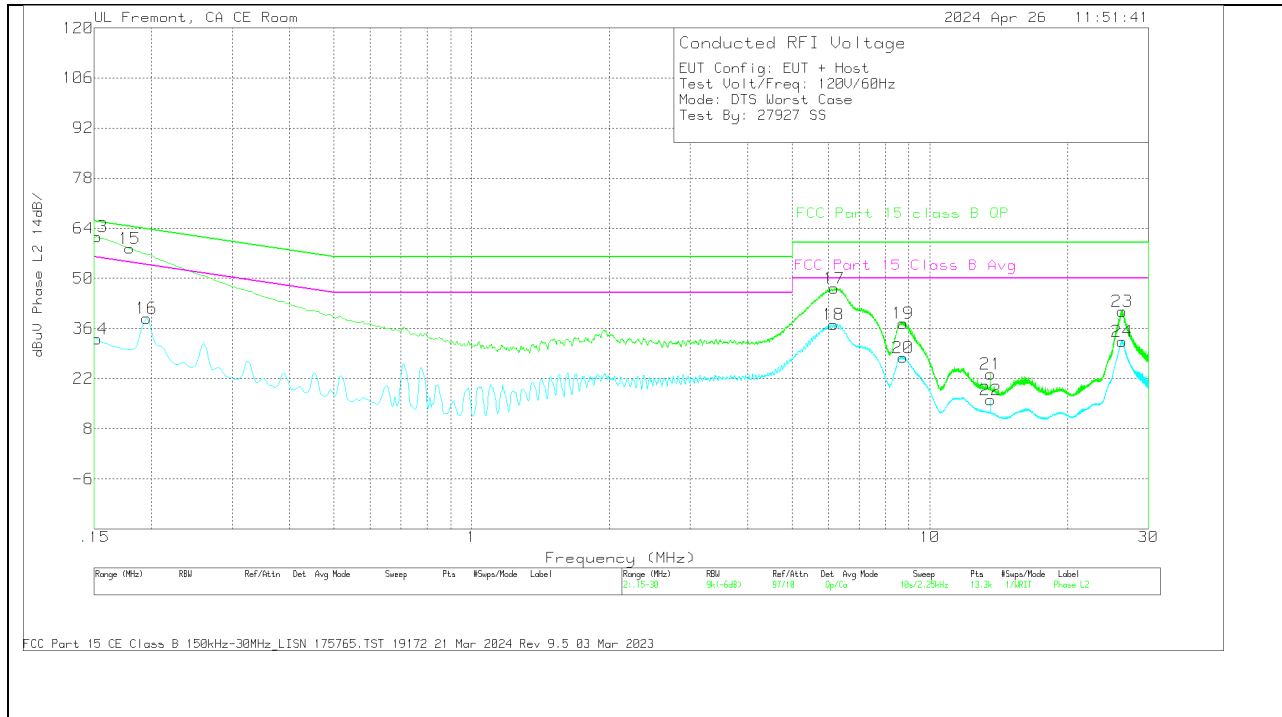


Range 2: Phase L2 .15 - 30MHz													
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trms Limiter (dB)	10 dB Pad	DCCF (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B QP dBuV	Margin (dB)
14	.1523	13.5	Ca	0	.1	9.5	10	0	33.1	55.88	-22.78	-	-
16	.195	19.33	Ca	.1	0	9.4	10	0	38.83	53.82	-14.99	-	-
18	6.1575	17.61	Ca	.1	0	9.4	10	0	37.11	50	-12.89	-	-
20	8.7428	8.41	Ca	.1	0	9.4	10	0	27.91	50	-22.09	-	-
22	13.56	-3.79	Ca	.2	.1	9.5	10	0	16.01	50	-33.99	-	-
24	26.2635	12.54	Ca	.3	.2	9.4	10	0	32.44	50	-17.56	-	-
13	.1523	42.05	Qp	0	.1	9.5	10	0	61.65	-	-	65.88	-4.23
15	.1793	38.9	Qp	.1	0	9.4	10	0	58.4	-	-	64.52	-6.12
17	6.1778	27.71	Qp	.1	0	9.4	10	0	47.21	-	-	60	-12.79
19	8.7473	18.01	Qp	.1	0	9.4	10	0	37.51	-	-	60	-22.49
21	13.56	3.42	Qp	.2	.1	9.5	10	0	23.22	-	-	60	-36.78
23	26.2838	20.97	Qp	.3	.2	9.4	10	0	40.87	-	-	60	-19.13

Qp - Quasi-Peak detector
Ca - CISPR average detection

11.1.2. AC POWER LINE AC/DC ADAPTER


LINE 1 RESULTS

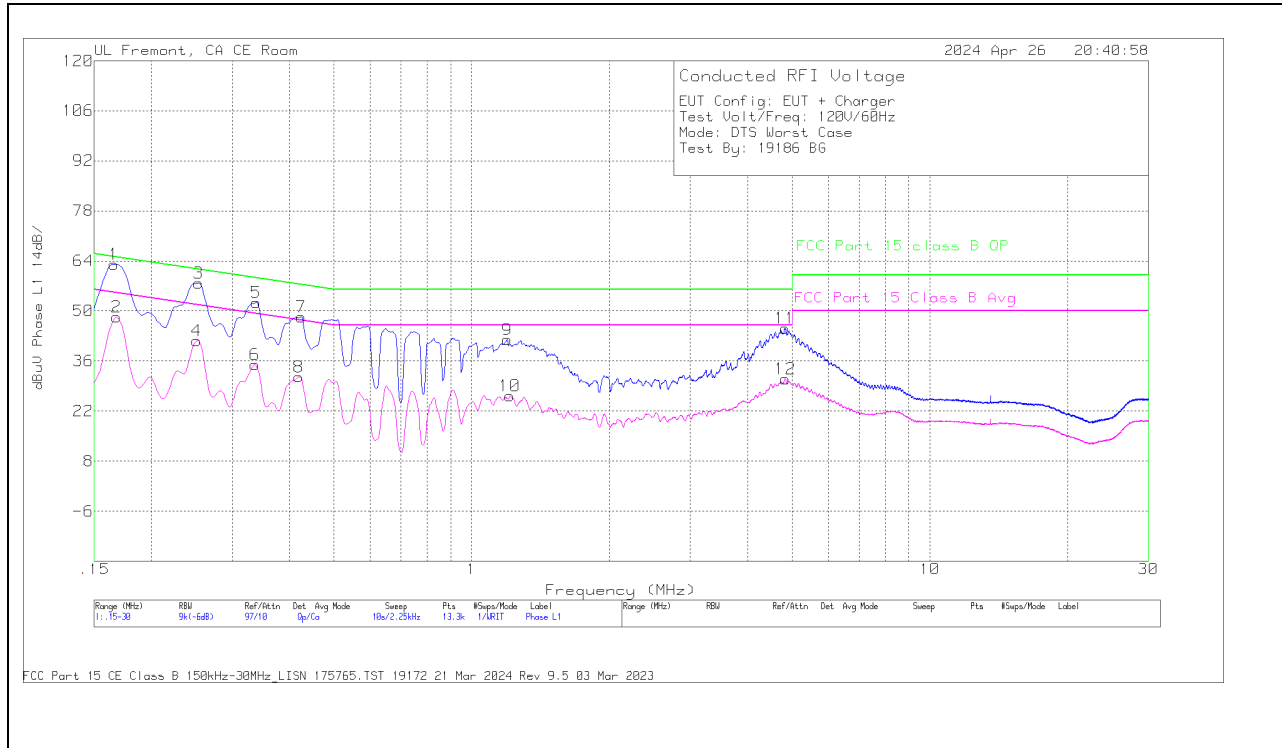

Range 1: Phase L1 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trms Limiter (dB)	10 dB Pad	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B QP dBuV	Margin (dB)
2	.168	28.68	Ca	0	.1	9.5	10	48.28	55.06	-6.78	-	-
4	.2513	22.24	Ca	0	0	9.4	10	41.64	51.72	-10.08	-	-
6	.3368	15.57	Ca	0	0	9.4	10	34.97	49.28	-14.31	-	-
8	.42	12.19	Ca	0	0	9.4	10	31.59	47.45	-15.86	-	-
10	1.212	6.69	Ca	.1	0	9.4	10	26.19	46	-19.81	-	-
12	4.8356	11.4	Ca	.2	0	9.4	10	31	46	-15	-	-
1	.1658	43.47	Qp	0	.1	9.5	10	63.07	-	-	65.17	-2.1
3	.2535	38.35	Qp	0	0	9.4	10	57.75	-	-	61.64	-3.89
5	.339	33	Qp	0	0	9.4	10	52.4	-	-	59.23	-6.83
7	.4245	28.98	Qp	0	0	9.4	10	48.38	-	-	57.36	-8.98
9	1.1963	22.44	Qp	.1	0	9.4	10	41.94	-	-	56	-14.06
11	4.8278	25.65	Qp	.2	0	9.4	10	45.25	-	-	56	-10.75

Qp - Quasi-Peak detector
 Ca - CISPR average detection

LINE 2 RESULTS

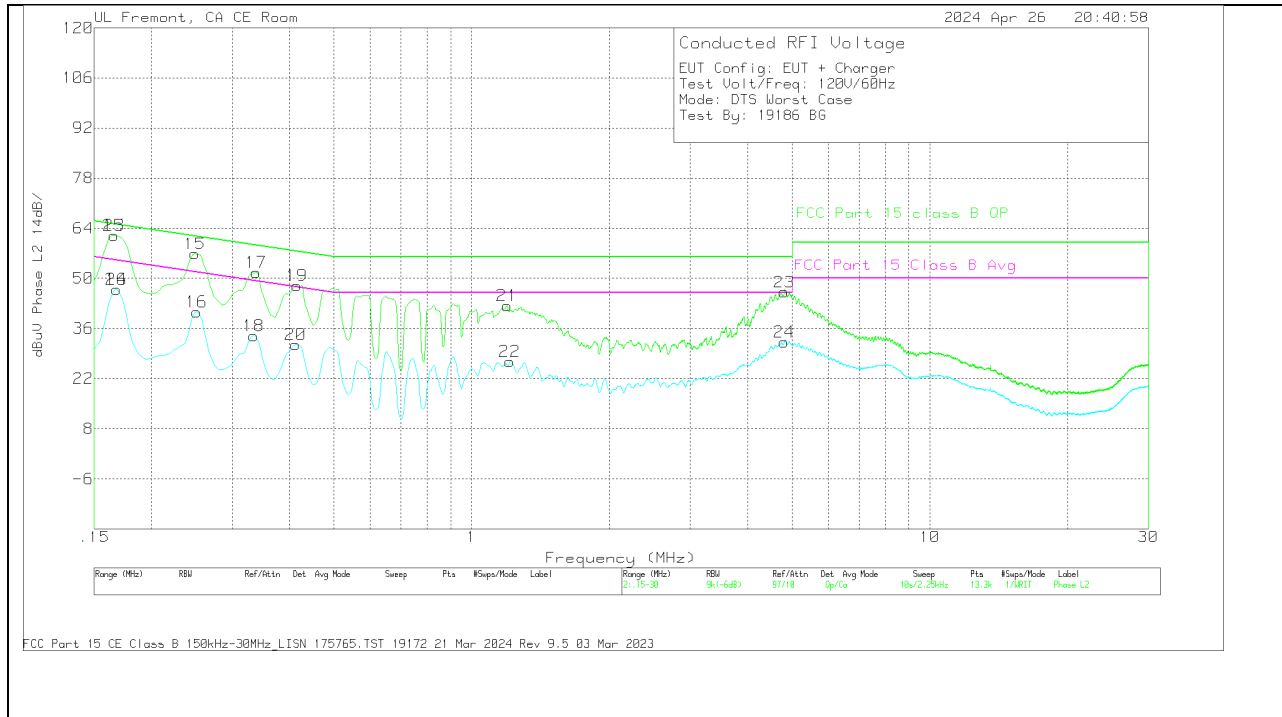

Range 2: Phase L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	Trns Limiter (dB)	10 dB Pad	Corrected Reading dBuV	FCC Part 15 Class B Avg dBuV	Margin (dB)	FCC Part 15 class B QP dBuV	Margin (dB)
14	.168	27.4	Ca	0	.1	9.5	10	47	55.06	-8.06	-	-
16	.2513	21.29	Ca	0	0	9.4	10	40.69	51.72	-11.03	-	-
18	.3345	14.45	Ca	.1	0	9.4	10	33.95	49.34	-15.39	-	-
20	.4133	12	Ca	.1	0	9.4	10	31.5	47.58	-16.08	-	-
22	1.212	7.27	Ca	.1	0	9.4	10	26.77	46	-19.23	-	-
24	4.812	12.73	Ca	.1	0	9.4	10	32.23	46	-13.77	-	-
26	.168	27.4	Ca	0	.1	9.5	10	47	55.06	-8.06	-	-
13	.1658	42.46	Qp	0	.1	9.5	10	62.06	-	-	65.17	-3.11
15	.249	37.45	Qp	0	0	9.4	10	56.85	-	-	61.79	-4.94
17	.339	32.22	Qp	.1	0	9.4	10	51.72	-	-	59.23	-7.51
19	.4155	28.51	Qp	.1	0	9.4	10	48.01	-	-	57.54	-9.53
21	1.1963	22.85	Qp	.1	0	9.4	10	42.35	-	-	56	-13.65
23	4.812	26.65	Qp	.1	0	9.4	10	46.15	-	-	56	-9.85
25	.1658	42.46	Qp	0	.1	9.5	10	62.06	-	-	65.17	-3.11

Qp - Quasi-Peak detector
Ca - CISPR average detection

12. SETUP PHOTOS

Please refer to 14982479-EP1V1 for setup photos

END OF TEST REPORT