



TEST REPORT

Report Number: 14982489- E14V2

Applicant : APPLE, INC
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3082

Brand : APPLE

FCC ID : BCG-E8692A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR Part 2, Part 96

Date Of Issue:
2024-08-16

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2024-08-09	Initial Review	Mengistu Mekuria
V2	2024-08-16	Updated Section 3, 6, 9 & 10	Binod Sitaula

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. SUMMARY OF TEST RESULTS.....	6
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
5.1. METROLOGICAL TRACEABILITY	8
5.2. DECISION RULES.....	8
5.3. MEASUREMENT UNCERTAINTY.....	8
5.4. SAMPLE CALCULATION	8
6. EQUIPMENT UNDER TEST.....	9
6.1. DESCRIPTION OF EUT	9
6.2. MAXIMUM OUTPUT POWER	9
6.3. SOFTWARE AND FIRMWARE.....	14
6.4. MAXIMUM ANTENNA GAIN.....	14
6.5. WORST-CASE CONFIGURATION AND MODE	15
6.6. DESCRIPTION OF TEST SETUP	16
7. TEST AND MEASUREMENT EQUIPMENT	18
8. RF OUTPUT POWER MEASUREMENTS	19
8.1. LTE BAND 48 AND 5G NR n48	20
8.2. LTE ULCA BAND 48	25
9. CONDUCTED TEST RESULTS	27
9.1. OCCUPIED BANDWIDTH	27
9.1.1. LTE BAND 48 AND 5G NR n48	30
9.1.2. LTE ULCA BAND 48	32
9.2. EMISSION MASK AND ADJACENT CHANNEL POWER.....	34
9.2.1. LTE BAND 48 AND 5G NR n48	36
9.2.2. LTE ULCA BAND 48	64
9.3. OUT OF BAND EMISSIONS.....	68
9.3.1. LTE BAND 48 AND 5G NR n48	69
9.3.2. LTE ULCA BAND 48	72
9.4. FREQUENCY STABILITY.....	73
9.4.1. LTE BAND 48 AND 5G NR n48	74

9.4.2. LTE ULCA BAND 48	76
9.5. PEAK-TO-AVERAGE POWER RATIO	77
9.5.1. LTE BAND 48 AND 5G NR n48	78
9.5.2. LTE ULCA BAND 48	79
10. RADIATED TEST RESULTS.....	80
10.1. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 4	84
10.1.1. LTE BAND 48 AND 5G NR n48	84
10.1.2. QPSK LTE ULCA BAND 48 (20.0MHZ + 20.0MHZ BANDWIDTH).....	86
10.2. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 7	87
10.2.1. LTE BAND 48 AND 5G NR n48	87
10.2.2. QPSK LTE ULCA BAND 48 (20.0MHZ + 20.0MHZ BANDWIDTH).....	89
10.3. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 8	90
10.3.1. LTE BAND 48 AND 5G NR n48	90
10.3.2. QPSK LTE ULCA BAND 48 (20.0MHZ + 20.0MHZ BANDWIDTH).....	92
10.4. FIELD STRENGTH OF SPURIOUS RADIATION, ANT 9	93
10.4.1. LTE BAND 48 AND 5G NR n48	93
10.4.2. QPSK LTE ULCA BAND 48 (20.0MHZ + 20.0MHZ BANDWIDTH).....	95
11. SETUP PHOTOS	96

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A.
Model	A3082
Brand	APPLE
FCC ID	BCG-E8692A
EUT Description	SMARTPHONE
Serial Number	RADIATED: HJWN3127DQ, THVY70QKM3, R9RT2PG4W4 CONDUCTED: C7HH57000DM0000HBU, C7HH6000590000HBR
Sample Receipt Date	2024-02-02
Date Tested	2024-02-02 to 2024-07-23
Applicable Standards	FCC 47 CRF Part 2, Part 96
Test Results	COMPLIES

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.

Approved & Released By:	Reviewed By: 	Prepared By: 
Mengistu Mekuria Staff Laboratory Engineer UL Verification Services Inc.	Binod Sitala Laboratory Engineer Associate UL Verification Services Inc.	Tewodros Woldemichael Laboratory Engineer UL Verification Services Inc.

2. SUMMARY OF TEST RESULTS

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for correctly integrating customer-provided data with measurements performed by UL Verification Services Inc.

Below is a list of the data provided by the customer:

1. Antenna gain (see section 6.4).

2. Requirement Description	Band	Requirement Clause Number (FCC)	Result	Remarks
Equivalent Isotropic Radiated Power	48	96.41 (b)	Complies	

Requirement Description	Requirement Clause Number (FCC)	Result	Remarks
Occupied Bandwidth	2.1049	Complies	
Band Edge and Emission Mask	2.1051, 96.41(e)	Complies	
Out of Band Emissions	2.1051, 96.41(e)	Complies	
Frequency Stability	2.1055	Complies	
Peak-to-Average Ratio	96.41 (g)	Complies	
Field Strength of Spurious Radiation	2.1053, 96.41(e)	Complies	

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- FCC 47 CFR Part 2, Part 96
- [FCC KDB 971168 D01](#) : Power Meas License Digital Systems
- [FCC KDB 971168 D02](#): Misc Rev Approv License Devices
- [FCC KDB 412172 D01](#) : Determining ERP and EIRP

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input checked="" type="checkbox"/>	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
<input checked="" type="checkbox"/>	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
<input checked="" type="checkbox"/>	Building 3: 843 Auburn Court, Fremont, CA 94538, USA			
<input checked="" type="checkbox"/>	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA			
<input checked="" type="checkbox"/>	Building 5: 47670 Kato Rd, Fremont, CA 94538, USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U_{Lab}
Conducted Antenna Port Emission Measurement	1.940
Power Spectral Density	2.466
Time Domain Measurements Using SA	3.39
RF Power Measurement Direct Method Using Power Meter	0.450 Peak; 1.300 Ave.
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 db
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 db
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 db
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 db
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 db
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 db
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 db

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5GNR1, 5GNR2, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab-Narrow Band (NB) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. This device is not user-serviceable and requires special tools to disassemble.

6.2. MAXIMUM OUTPUT POWER

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015
KDB 971168 D01 Section 5.6

$$\text{ERP/EIRP} = \text{PMes} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMes, typically dBW or dBm);

PMes = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average conducted and ERP / EIRP output powers as follows:

LTE BAND 48

LOW CHANNEL

Part 96		EIRP Limit (W)/ 10MHz	0.20	Antenna Gain (dBi) Ant(9)	0.10				
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator	
5.0	QPSK	3552.5	3697.5	22.37	22.47	0.177	4471	4M47G7W	
	16QAM			22.40	22.50	0.178	4488	4M49D7W	
10.0	QPSK	3555.0	3695.0	22.38	22.48	0.177	8965	8M97G7W	
	16QAM			22.39	22.49	0.177	8980	8M98D7W	
15.0	QPSK	3557.5	3692.5	22.38	22.48	0.177	13303	13M3G7W	
	16QAM			22.40	22.50	0.178	13377	13M4D7W	
20.0	QPSK	3560.0	3690.0	22.40	22.50	0.178	17950	18M0G7W	
	16QAM			22.39	22.49	0.177	17864	17M9D7W	

MIDDLE CHANNEL

Part 96		EIRP Limit (W)/ 10MHz	0.20	Antenna Gain (dBi) Ant(9)	0.50				
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator	
5.0	QPSK	3552.5	3697.5	22.00	22.50	0.178	4471	4M47G7W	
	16QAM			21.99	22.49	0.177	4488	4M49D7W	
10.0	QPSK	3555.0	3695.0	21.99	22.49	0.177	8965	8M97G7W	
	16QAM			21.99	22.49	0.177	8980	8M98D7W	
15.0	QPSK	3557.5	3692.5	21.98	22.48	0.177	13303	13M3G7W	
	16QAM			21.99	22.49	0.177	13377	13M4D7W	
20.0	QPSK	3560.0	3690.0	21.99	22.49	0.177	17950	18M0G7W	
	16QAM			21.99	22.49	0.177	17864	17M9D7W	

HIGH CHANNEL

Part 96		EIRP Limit (W) / 10MHz	0.20						
Antenna Gain (dBi) Ant(9)		-0.70							
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator	
5.0	QPSK	3552.5	3697.5	23.06	22.36	0.172	4471	4M47G7W	
	16QAM			23.10	22.40	0.174	4488	4M49D7W	
10.0	QPSK	3555.0	3695.0	23.08	22.38	0.173	8965	8M97G7W	
	16QAM			23.10	22.40	0.174	8980	8M98D7W	
15.0	QPSK	3557.5	3692.5	23.10	22.40	0.174	13303	13M3G7W	
	16QAM			23.08	22.38	0.173	13377	13M4D7W	
20.0	QPSK	3560.0	3690.0	23.09	22.39	0.173	17950	18M0G7W	
	16QAM			23.10	22.40	0.174	17864	17M9D7W	

5G NR n48

LOW CHANNEL

Part 96		EIRP Limit (W)	0.20						
Antenna Gain (dBi) Ant(9)		0.10							
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator	
10.0	BPSK	3555.0	3695.0	22.36	22.46	0.176	8629	8M63G7W	
	QPSK			22.39	22.49	0.177	8607	8M61G7W	
	16QAM			22.40	22.50	0.178	8611	8M61D7W	
15.0	BPSK	3557.5	3692.5	22.40	22.50	0.178	12847	12M8G7W	
	QPSK			22.37	22.47	0.177	12893	12M9G7W	
	16QAM			22.39	22.49	0.177	12862	12M9D7W	
20.0	BPSK	3560.0	3690.0	22.35	22.45	0.176	17898	17M9G7W	
	QPSK			22.39	22.49	0.177	17837	17M8G7W	
	16QAM			22.39	22.49	0.177	17872	17M9D7W	
30.0	BPSK	3565.0	3685.0	22.39	22.49	0.177	26871	26M9G7W	
	QPSK			22.34	22.44	0.175	26738	26M7G7W	
	16QAM			22.39	22.49	0.177	26805	26M8D7W	
40.0	BPSK	3570.0	3680.0	22.37	22.47	0.177	35708	35M7G7W	
	QPSK			22.37	22.47	0.177	35796	35M8G7W	
	16QAM			22.38	22.48	0.177	35779	35M8D7W	

MIDDLE CHANNEL

Part 96		Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator									
EIRP Limit (W)																			
Antenna Gain (dBi) Ant(9)																			
10.0	BPSK	3555.0	3695.0			22.00	22.50	0.178	8629	8M63G7W									
	QPSK					21.99	22.49	0.177	8607	8M61G7W									
	16QAM					21.99	22.49	0.177	8611	8M61D7W									
15.0	BPSK	3557.5	3692.5			21.95	22.45	0.176	12847	12M8G7W									
	QPSK					22.00	22.50	0.178	12893	12M9G7W									
	16QAM					21.99	22.49	0.177	12862	12M9D7W									
20.0	BPSK	3560.0	3690.0			21.97	22.47	0.177	17898	17M9G7W									
	QPSK					21.98	22.48	0.177	17837	17M8G7W									
	16QAM					22.00	22.50	0.178	17872	17M9D7W									
30.0	BPSK	3565.0	3685.0			21.99	22.49	0.177	26871	26M9G7W									
	QPSK					21.99	22.49	0.177	26738	26M7G7W									
	16QAM					21.98	22.48	0.177	26805	26M8D7W									
40.0	BPSK	3570.0	3680.0			21.99	22.49	0.177	35708	35M7G7W									
	QPSK					22.00	22.50	0.178	35796	35M8G7W									
	16QAM					22.00	22.50	0.178	35779	35M8D7W									

HIGH CHANNEL

Part 96		Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator									
EIRP Limit (W)																			
Antenna Gain (dBi) Ant(9)																			
10.0	BPSK	3555.0	3695.0			23.10	22.40	0.174	8629	8M63G7W									
	QPSK					23.09	22.39	0.173	8607	8M61G7W									
	16QAM					23.09	22.39	0.173	8611	8M61D7W									
15.0	BPSK	3557.5	3692.5			23.09	22.39	0.173	12847	12M8G7W									
	QPSK					23.06	22.36	0.172	12893	12M9G7W									
	16QAM					23.09	22.39	0.173	12862	12M9D7W									
20.0	BPSK	3560.0	3690.0			23.10	22.40	0.174	17898	17M9G7W									
	QPSK					23.07	22.37	0.173	17837	17M8G7W									
	16QAM					23.07	22.37	0.173	17872	17M9D7W									
30.0	BPSK	3565.0	3685.0			23.09	22.39	0.173	26871	26M9G7W									
	QPSK					23.09	22.39	0.173	26738	26M7G7W									
	16QAM					23.08	22.38	0.173	26805	26M8D7W									
40.0	BPSK	3570.0	3680.0			23.10	22.40	0.174	35708	35M7G7W									
	QPSK					23.07	22.37	0.173	35796	35M8G7W									
	16QAM					23.07	22.37	0.173	35779	35M8D7W									

LTE ULCA BAND 48

Part 96								
EIRP Limit (W)/ 10MHz		0.20						
Antenna Gain (dBi) (Ant9)		0.50						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
5+20	QPSK	3553.3	3690.0	21.98	22.48	0.177	23327	23M3G7W
	16QAM			22.00	22.50	0.178	23211	23M2D7W
20+5	QPSK	3560.0	3696.7	22.00	22.50	0.178	23324	23M3G7W
	16QAM			21.98	22.48	0.177	23278	23M3D7W
10+20	QPSK	3555.5	3690.0	21.98	22.48	0.177	28024	28M0G7W
	16QAM			22.00	22.50	0.178	28038	28M0D7W
20+10	QPSK	3560.0	3694.5	22.00	22.50	0.178	28116	28M1G7W
	16QAM			21.91	22.41	0.174	27925	27M9D7W
15+20	QPSK	3557.8	3690.0	21.98	22.48	0.177	32810	32M8G7W
	16QAM			22.00	22.50	0.178	32803	32M8D7W
20+15	QPSK	3560.0	3692.2	22.00	22.50	0.178	32781	32M8G7W
	16QAM			21.93	22.43	0.175	32802	32M8D7W
20+20	QPSK	3560.0	3690.0	22.00	22.50	0.178	37634	37M6G7W
	16QAM			21.87	22.37	0.173	37735	37M7D7W

6.3. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.02.01.

6.4. MAXIMUM ANTENNA GAIN

The antenna(s) gain, as provided by the manufacturer' are as follows:

LTE, 5G NR, and ULCA Bands	Frequency Range (MHz)	ANT 7 Antenna Gain (dBi)	ANT 8 Antenna Gain (dBi)	ANT 9 Antenna Gain (dBi)	ANT 4 Antenna Gain (dBi)
LTE Band 48, 5G NR n48 (Low)	3550 – 3700	-4.8	-2.4	0.1	-6.3
LTE Band 48, 5G NR n48 (Mid)	3550 – 3700	-5.2	-2.0	0.5	-3.9
LTE Band 48, 5G NR n48 (High)	3550 – 3700	-6.1	-2.9	-0.7	-4.6

LTECA Bands	Frequency Range (MHz)	ANT 7 Antenna Gain (dBi)	ANT 8 Antenna Gain (dBi)	ANT 9 Antenna Gain (dBi)	ANT 4 Antenna Gain (dBi)
LTE ULCA48	3550 – 3700	-5.2	-2.0	0.5	-3.9

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT supports the following LTE and 5G NRs:
Band 48, 5G NR n48.

For 5G NRs, conducted spurious emission tests were conducted on wider bandwidth with inner 1RB since this is the worst bandwidth and the highest output power.

BPSK modulation applied only for 5G NR frequencies and has the same tune up power as QPSK modulations.

DFT-s-OFDM and CP-OFDM waveforms were investigated, and DFT-s-OFDM was found to be the worst case.

The worst-case scenario for all measurements is based on an engineering evaluation made on different modulations. Then, QPSK and BPSK were observed as the worst mode to LTE bands and 5G NR bands respectively and set for all conducted and radiated. Output power measurements were measured on BPSK, QPSK, 16QAM, 64QAM, and 256QAM modulations. For testing purposes emissions on sections 8 and 9 were measured while QPSK/BPSK was set at or above target power for all bands. Conducted tests were performed on the worst-case antenna port because it has the highest conducted power. The worst-case antenna port is shown in the table below.

	Worst case Antenna Port for Conducted Power
LTE BAND 48	7

The EUT was investigated in three orthogonal orientations X/Y/Z on all ANT4, ANT7, ANT8 and ANT 9 antennas to determine the worst-case orientation. The following table exhibit the worst-case orientation for different frequency bands. The full tests of the EUT have made upon the orientations that shown in the table below.

Frequency Bands	ANT1	ANT2	ANT3	ANT4	ANT7	ANT8	ANT9
3300 – 3980 MHz	N/A	N/A	N/A	X	X	X	X


Radiated spurious emissions were investigated from 9kHz to 30MHz, 30MHz-1GHz and above 18GHz. There were no emissions found with less than 20dB of margin from 9kHz to 30MHz, 30MHz-1GHz and above 18GHz.

For simultaneous transmission of multiple channels in the 2.4GHz/5GHz WLAN, UWB, and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.


6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description	Manufacturer	Model	Serial Number	FCC ID/ DoC		
Laptop	Apple	MacBook Pro	HRP082673	BCGA1708		
AC/DC adapter	Apple	A1718	C4H64450HH3GN8RA6	--		
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	DC	Un-shielded	1.0	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5.0	N/A

CONDUCTED SETUP

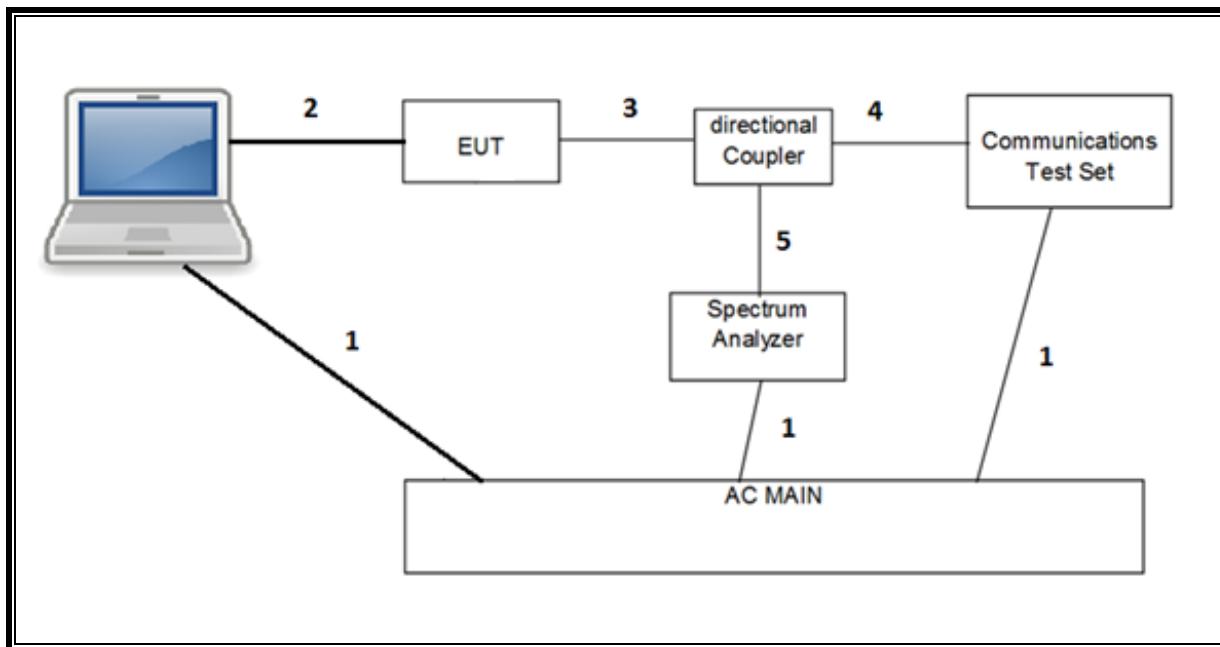

RADIATED SETUP

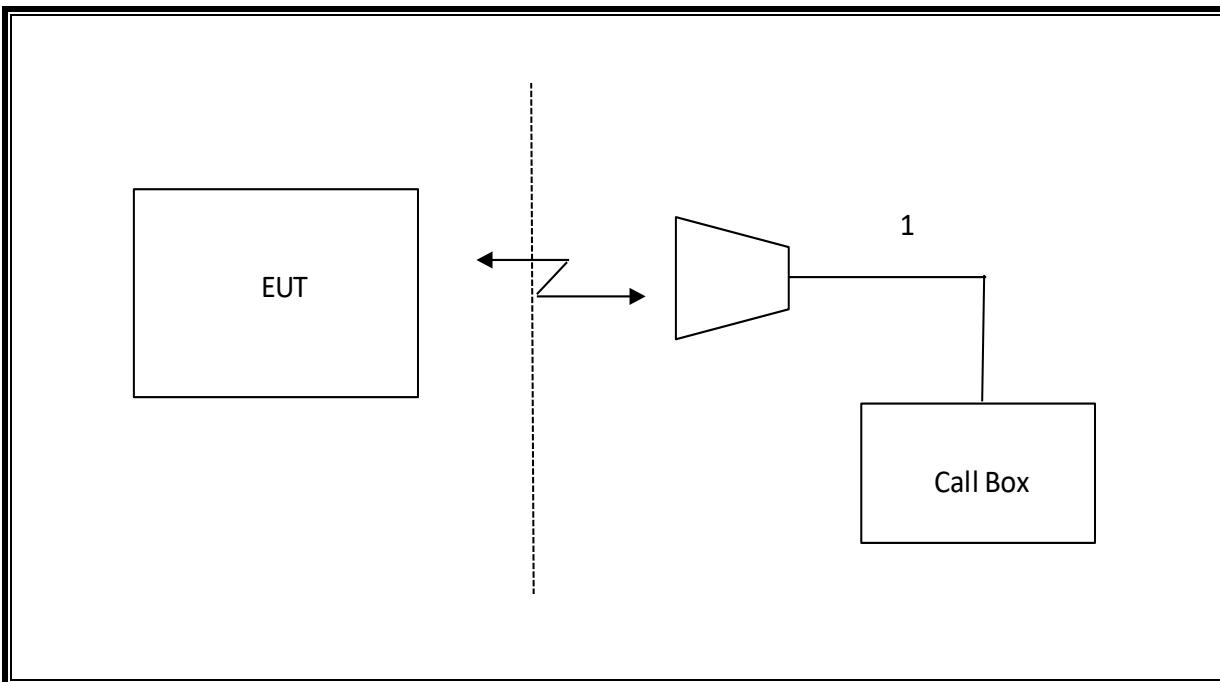

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	80430	2024-08-31
Antenna, Horn 1-18GHz	ETS Lindgren	3117	79834	2024-06-30
Antenna, Broadband Hybrid, 30MHz to 3000MHz	SUNAR	JB3	222009	2024-10-31
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	170014	2024-08-31
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO-METRICS	EM-6872	170016	2024-08-31
RF Filter Box, 1-18GHz	UL-FR1	NA	217255	2024-10-31
RF Filter Box, 1-18GHz	UL-FR1	RATS 2	226781	2024-09-30
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	430250	2024-09-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169936	2025-02-28
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169935	2025-02-28
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	85943	2025-02-28
Directional Coupler	KRYTAR	152610	198816	2024-10-31
Directional Coupler	KRYTAR	152610	231664	2025-01-22
Power Meter, P-series single channel	Keysight	N1912A	90719	2025-01-31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight	N1921A	81319	2025-01-31
Filter, HPF 1.2GHz	Wainwright Instruments GmbH	WHKX6-948-1.2/15G-40ST	99	2024-10-31
Spectrum Analyzer, PXA, 2Hz to 44GHz	Keysight	N9030B	231739	2025-01-31
Spectrum Analyzer, PXA, 2Hz to 44GHz	Keysight	N9030B	245120	2025-02-28
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	85212	2025-02-28
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	222793	2025-02-28
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	222797	2025-02-28
Chamber, Environmental	Thermotron Corp.	SM-16C Mini-Max	179936	2024-06-30
Transmitting Antenna, Horn Antenna	TEKBOX Digital Solutions	TBMA4	226709	C.N.R.
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	199659	2024-12-31
Amplifier 18-26.5GHz, +5Vdc, -54dBm P1dB	AMPLICAL	AMP18G26.5-60	234683	2025-05-31
DC Power Supply	GWINSTEK	GPS18500	N/A	C.N.R.
UL AUTOMATION SOFTWARE				
CLT Software	UL	UL RF	V2023.11.21.0	
Power Measurement Software	UL	UL RF	V2023.08.14.0	
Radiated test software	UL	UL RF	Ver 9.5 2023-05-01	

NOTES:

- * Testing is completed before equipment expiration date.

8. RF OUTPUT POWER MEASUREMENTS

CONDUCTED OUTPUT POWER MEASUREMENT PROCEDURE

All LTE bands conducted average power is obtained from the CMW500 telecommunication test set.

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS136.101 specification.

UE Power Class: 3 (23 +/- 2dBm). Band 41 UE Power Class: 2 (26 +/- 2 dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS136.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM				≥ 1			≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS136.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	

RESULTS

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows:

8.1. LTE BAND 48 AND 5G NR n48

LTE BAND 48

Test Engineer ID:	25780	Test Date:	2024-03-09
-------------------	-------	------------	------------

OUTPUT POWER FOR LTE BAND 48 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)															
				ANT 7				ANT 8				ANT 9				ANT 4			
				55265	55990	56715	55260	55990	56715	55265	55990	56715	55260	55990	56715				
	QPSK	1	0	25.97	25.92	25.94	24.41	24.42	24.49	22.37	22.00	23.03	24.60	24.66	24.66				

5.0		1	12	25.93	25.98	25.99	24.44	24.47	24.45	22.34	21.97	23.06	24.64	24.65	24.68
		1	24	25.94	25.96	26.00	24.43	24.43	24.41	22.32	21.97	23.06	24.64	24.64	24.63
		12	0	24.98	24.98	24.94	24.46	24.42	24.47	22.31	21.93	23.06	23.06	23.06	23.06
		12	6	24.90	24.96	24.98	24.45	24.40	24.44	22.35	21.91	23.00	23.68	23.61	23.60
		12	11	24.93	24.97	24.93	24.42	24.50	24.44	22.30	21.94	23.02	23.65	23.67	23.62
		25	0	24.91	24.92	24.95	24.40	24.41	24.44	22.33	21.97	23.04	23.69	23.63	23.66
	16QAM	1	0	25.00	24.91	24.96	24.48	24.46	24.42	22.39	21.97	23.04	23.64	23.68	23.69
		1	12	24.93	24.94	24.93	24.43	24.42	24.43	22.37	21.91	23.02	23.69	23.61	23.62
		1	24	24.91	24.91	25.00	24.50	24.45	24.49	22.32	21.95	23.06	23.64	23.62	23.67
		12	0	23.98	23.95	23.96	23.50	23.58	23.57	22.33	21.91	23.04	22.70	22.61	22.67
		12	6	23.99	23.91	23.94	23.59	23.54	23.57	22.38	21.99	23.02	22.62	22.68	22.68
		12	11	23.90	23.98	23.96	23.53	23.58	23.55	22.33	21.93	23.10	22.68	22.69	22.63
	64QAM	1	0	23.94	23.95	23.97	23.56	23.51	23.50	22.40	21.91	23.04	22.63	22.66	22.69
		1	12	23.96	24.00	23.97	23.59	23.59	23.52	22.34	21.92	23.09	22.61	22.66	22.64
		1	24	23.95	23.93	23.95	23.60	23.58	23.55	22.39	21.97	23.07	22.61	22.61	22.60
		12	0	22.95	22.95	23.00	22.55	22.51	22.58	22.33	21.99	23.02	21.60	21.69	21.67
		12	6	22.95	22.99	22.94	22.59	22.52	22.55	22.31	21.92	23.02	21.64	21.65	21.64
		12	11	22.95	22.99	22.92	22.51	22.53	22.55	22.30	21.93	23.02	21.66	21.64	21.70
	256QAM	1	0	22.91	22.97	22.96	22.55	22.50	22.59	22.36	21.94	23.06	21.63	21.68	21.61
		1	12	20.92	20.97	20.96	20.54	20.51	20.55	20.93	20.95	20.96	19.67	19.68	19.70
		1	24	20.97	20.91	20.92	20.51	20.58	20.52	20.97	20.99	20.99	19.68	19.62	19.64
		1	49	20.94	20.94	20.98	20.50	20.51	20.55	20.93	20.90	20.93	19.64	19.65	19.66
		12	0	20.95	20.98	20.90	20.53	20.52	20.51	20.94	20.98	20.93	19.70	19.65	19.61
		12	6	20.96	20.95	20.98	20.51	20.52	20.58	20.94	20.95	20.95	19.69	19.70	19.62
		12	11	20.99	20.93	20.92	20.58	20.50	20.52	20.96	20.98	20.92	19.63	19.69	19.65
		25	0	20.92	20.97	20.98	20.55	20.53	20.59	20.92	20.95	20.92	19.67	19.64	19.69

OUTPUT POWER FOR LTE BAND 48 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)															
				ANT 7				ANT 8				ANT 9				ANT 4			
				55290	55990	56690	55290	55990	56690	55290	55990	56690	55290	55990	56690				
10.0	QPSK	1	0	25.96	25.93	25.98	24.41	24.43	24.42	22.33	21.98	23.06	24.66	24.67	24.62				

		1	24	25.94	25.92	25.94	24.44	24.49	24.46	22.38	21.95	23.03	24.64	24.68	24.67
		1	49	25.91	26.00	25.90	24.42	24.43	24.40	22.36	21.92	23.08	24.66	24.62	24.69
		25	0	24.95	24.96	24.99	24.45	24.45	24.47	22.37	21.99	23.03	23.64	23.69	23.67
		25	12	24.96	24.93	24.97	24.45	24.41	24.46	22.34	21.99	23.05	23.68	23.62	23.61
		25	24	24.91	24.92	24.92	24.48	24.49	24.48	22.37	21.93	23.02	23.62	23.68	23.68
	16QAM	50	0	24.94	24.95	24.96	24.43	24.45	24.48	22.38	21.96	23.06	23.65	23.61	23.66
		1	0	24.96	24.97	24.96	24.47	24.44	24.45	22.33	21.99	23.04	23.65	23.64	23.62
		1	24	24.93	24.96	24.92	24.47	24.49	24.40	22.30	21.98	23.08	23.67	23.62	23.68
		1	49	24.97	24.98	24.94	24.44	24.47	24.41	22.35	21.97	23.02	23.68	23.62	23.69
		25	0	23.99	23.95	23.90	23.57	23.59	23.51	22.32	21.94	23.10	22.63	22.64	22.66
	64QAM	25	12	23.91	24.00	23.94	23.57	23.59	23.54	22.38	21.98	23.08	22.66	22.69	22.70
		25	24	23.95	23.92	23.95	23.59	23.57	23.55	22.35	21.96	23.01	22.65	22.69	22.69
		50	0	23.97	23.95	23.94	23.57	23.57	23.57	22.39	21.99	23.03	22.63	22.67	22.68
		1	0	23.99	23.98	24.00	23.54	23.55	23.54	22.32	21.90	23.02	22.60	22.64	22.70
		1	24	23.92	23.91	23.98	23.57	23.58	23.56	22.39	21.91	23.07	22.61	22.68	22.61
	256QAM	1	49	23.96	23.94	23.97	23.59	23.60	23.53	22.40	21.94	23.08	22.62	22.61	22.67
		25	0	22.91	22.98	22.93	22.50	22.51	22.53	22.37	21.94	23.00	21.69	21.66	21.69
		25	12	22.93	22.98	22.92	22.56	22.52	22.51	22.37	21.98	23.03	21.60	21.67	21.69
		25	24	22.94	22.91	22.98	22.56	22.51	22.50	22.32	21.97	23.08	21.69	21.63	21.67
		50	0	22.95	22.93	22.94	22.58	22.60	22.55	22.39	21.95	23.03	21.70	21.64	21.61
	256QAM	1	0	20.92	20.92	20.92	20.59	20.53	20.51	20.99	20.91	20.91	19.62	19.69	19.65
		1	24	20.92	20.94	20.96	20.51	20.56	20.53	20.92	20.90	20.95	19.65	19.63	19.68
		1	49	20.96	20.92	20.94	20.59	20.53	20.54	20.97	20.92	20.99	19.65	19.67	19.67
		25	0	20.95	20.97	20.91	20.54	20.51	20.53	20.97	20.94	20.96	19.67	19.64	19.63
		25	12	20.95	20.97	20.93	20.51	20.56	20.57	20.92	20.97	20.96	19.66	19.68	19.62
		25	24	20.97	20.96	20.95	20.56	20.50	20.59	20.98	20.99	20.94	19.66	19.64	19.64
		50	0	20.93	20.96	20.99	20.57	20.52	20.55	20.93	20.93	20.99	19.67	19.69	19.63

OUTPUT POWER FOR LTE BAND 48 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 7			ANT 8			ANT 9			ANT 4		
				55315	55990	56665	55315	55990	56665	55315	55990	56665	55315	55990	56665
15.0	QPSK	1	0	25.96	25.98	25.90	24.50	24.47	24.45	22.37	21.94	23.09	24.69	24.61	24.67
		1	37	25.93	25.92	25.93	24.48	24.42	24.46	22.33	21.98	23.09	24.64	24.66	24.70
		1	74	25.91	25.93	25.90	24.47	24.40	24.50	22.35	21.97	23.03	24.68	24.66	24.69
		36	0	24.99	24.98	24.92	24.45	24.43	24.43	22.31	21.97	23.07	23.66	23.62	23.62
		36	16	24.92	24.92	24.91	24.46	24.45	24.44	22.32	21.95	23.01	23.62	23.61	23.69
		36	35	24.99	24.92	24.92	24.47	24.44	24.47	22.38	21.96	23.01	23.62	23.66	23.65
		75	0	24.96	25.00	24.93	24.42	24.40	24.46	22.30	21.94	23.10	23.60	23.63	23.64
	16QAM	1	0	24.94	24.95	24.99	24.49	24.49	24.46	22.38	21.91	23.04	23.67	23.63	23.67
		1	37	24.93	24.95	24.93	24.45	24.48	24.50	22.37	21.94	23.08	23.63	23.64	23.61
		1	74	24.94	24.94	24.91	24.46	24.41	24.49	22.33	21.99	23.07	23.60	23.61	23.69
		36	0	23.93	23.91	23.91	23.52	23.57	23.52	22.30	21.93	23.04	22.62	22.70	22.66
		36	16	23.92	23.95	23.90	23.53	23.60	23.56	22.40	21.97	23.06	22.65	22.60	22.69
		36	35	23.93	23.99	23.93	23.59	23.54	23.54	22.34	21.98	23.03	22.66	22.65	22.66
		75	0	23.99	23.93	23.94	23.59	23.52	23.52	22.32	21.93	23.02	22.66	22.63	22.65
	64QAM	1	0	23.96	23.99	23.91	23.53	23.60	23.57	22.37	22.00	23.08	22.63	22.67	22.70
		1	37	23.99	23.96	23.98	23.51	23.56	23.53	22.31	21.95	23.01	22.60	22.60	22.65
		1	74	23.98	23.97	23.91	23.55	23.58	23.52	22.35	21.94	23.08	22.70	22.69	22.61
		36	0	22.93	22.97	22.93	22.58	22.51	22.52	22.31	21.97	23.08	21.68	21.66	21.66
		36	16	22.92	22.95	22.96	22.51	22.58	22.53	22.31	21.91	23.00	21.61	21.67	21.65
		36	35	22.95	22.93	22.98	22.59	22.55	22.58	22.33	21.92	23.04	21.64	21.69	21.66
		75	0	22.97	22.98	22.97	22.57	22.55	22.56	22.34	21.98	23.01	21.64	21.70	21.68
	256QAM	1	0	20.93	20.97	20.94	20.60	20.54	20.51	20.92	20.94	21.00	19.66	19.66	19.60
		1	37	20.95	20.91	20.96	20.58	20.59	20.54	20.99	20.99	19.67	19.69	19.64	
		1	74	20.98	20.90	20.91	20.55	20.51	20.52	20.93	20.92	20.91	19.63	19.62	19.60
		36	0	20.93	20.94	20.99	20.51	20.52	20.53	20.94	20.93	20.90	19.61	19.70	19.69
		36	16	20.91	21.00	20.99	20.53	20.54	20.57	20.95	20.95	20.98	19.69	19.68	19.65
		36	35	20.90	20.98	20.98	20.59	20.52	20.57	20.94	20.93	20.94	19.63	19.62	19.61
		75	0	20.92	20.99	20.93	20.59	20.56	20.52	20.96	20.92	20.92	19.62	19.67	19.61

OUTPUT POWER FOR LTE BAND 48 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 7			ANT 8			ANT 9			ANT 4		
				55340	55990	56640	55340	55990	56640	55340	55990	56640	55340	55990	56640
20.0	QPSK	1	0	25.95	25.97	25.93	24.42	24.44	24.42	22.35	21.93	23.07	24.70	24.68	24.66
		1	49	26.00	25.91	25.95	24.49	24.48	24.46	22.40	21.99	23.09	24.70	24.69	24.67
		1	99	25.91	25.99	25.99	24.46	24.44	24.45	22.40	21.95	23.07	24.65	24.69	24.64
		50	0	24.96	24.94	24.98	24.50	24.43	24.45	22.37	21.96	23.08	23.67	23.62	23.67
		50	24	24.95	24.95	24.95	24.48	24.46	24.45	22.33	21.98	23.00	23.62	23.69	23.66
		50	49	24.93	24.92	24.99	24.49	24.44	24.50	22.32	21.98	23.02	23.61	23.70	23.66
		100	0	24.98	24.93	24.97	24.44	24.47	24.49	22.37	21.94	23.01	23.62	23.62	23.68
	16QAM	1	0	24.90	24.98	24.95	24.43	24.44	24.44	22.32	21.91	23.02	23.63	23.69	23.62
		1	49	24.95	24.92	24.92	24.45	24.47	24.42	22.37	21.98	23.05	23.69	23.70	23.65
		1	99	24.92	24.99	24.91	24.41	24.44	24.45	22.31	21.99	23.05	23.63	23.61	23.68
		50	0	23.93	23.96	23.95	23.57	23.56	23.51	22.39	21.94	23.03	22.65	22.68	22.67
		50	24	23.99	23.91	23.97	23.57	23.51	23.55	22.31	21.93	23.06	22.64	22.67	22.67
		50	49	23.92	23.99	23.97	23.56	23.56	23.54	22.37	21.95	23.05	22.66	22.63	22.60
		100	0	24.00	23.94	23.97	23.59	23.52	23.51	22.33	21.99	23.10	22.64	22.66	22.63
	64QAM	1	0	23.92	23.96	23.97	23.56	23.57	23.59	22.31	21.97	23.07	22.68	22.70	22.60
		1	49	23.96	23.99	23.95	23.54	23.55	23.50	22.31	21.97	23.01	22.63	22.63	22.66
		1	99	23.94	23.95	23.93	23.55	23.54	23.53	22.32	21.98	23.03	22.63	22.63	22.60
		50	0	23.00	22.92	22.94	22.54	22.58	22.52	22.31	21.98	23.03	21.60	21.64	21.68
		50	24	23.00	22.95	22.98	22.54	22.51	22.53	22.38	21.99	23.04	21.65	21.61	21.63
		50	49	22.93	22.99	23.00	22.59	22.54	22.55	22.36	21.96	23.05	21.68	21.64	21.69
		100	0	22.95	22.93	22.98	22.53	22.58	22.52	22.31	21.97	23.09	21.64	21.70	21.63
	256QAM	1	0	20.91	20.95	20.93	20.53	20.57	20.58	20.97	21.00	21.00	19.66	19.64	19.61
		1	49	20.98	20.93	20.99	20.51	20.54	20.60	20.93	21.00	20.99	19.61	19.62	19.67
		1	99	20.93	20.98	20.93	20.54	20.57	20.55	20.90	20.98	20.98	19.63	19.66	19.67
		50	0	20.92	20.97	20.95	20.50	20.52	20.52	20.97	20.90	20.95	19.60	19.60	19.63
		50	24	20.96	20.93	20.92	20.50	20.52	20.51	20.96	20.99	20.95	19.61	19.62	19.70
		50	49	20.94	20.96	20.92	20.50	20.52	20.54	20.95	20.99	20.95	19.65	19.63	19.61
		100	0	20.91	20.98	20.90	20.57	20.54	20.55	20.97	20.99	20.95	19.68	19.67	19.64

5G NR n48

Test Engineer ID:	25780	Test Date:	2024-02-24
-------------------	-------	------------	------------

OUTPUT POWER FOR 5G NR n48 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 7			ANT 8			ANT 9			ANT 4		
				637000	641666	646333	637000	641666	646333	637000	641666	646333	637000	641666	646333
10.0	BPSK	1	0	25.46	25.44	25.48	24.48	24.48	24.42	22.36	21.94	23.01	24.15	24.17	24.16
		1	1	25.98	25.98	26.00	24.46	24.49	24.48	22.33	21.95	23.10	24.64	24.68	24.63
		1	22	26.00	25.93	25.91	24.44	24.42	24.47	22.35	21.96	23.04	24.67	24.68	24.60
		1	23	25.47	25.49	25.43	24.46	24.43	24.48	22.32	21.91	23.01	24.13	24.16	24.12
		12	6	25.90	25.94	25.93	24.49	24.45	24.46	22.33	22.00	23.02	24.69	24.60	24.69
		24	0	25.44	25.43	25.45	24.42	24.40	24.42	22.30	21.98	23.03	24.12	24.18	24.19
	QPSK	1	0	24.95	24.97	24.90	24.48	24.47	24.50	22.39	21.92	23.09	23.61	23.65	23.62
		1	1	25.93	25.96	25.92	24.49	24.41	24.44	22.35	21.99	23.00	24.61	24.68	24.64
		1	22	25.98	25.98	25.94	24.44	24.41	24.49	22.37	21.93	23.05	24.70	24.61	24.60
		1	23	24.92	24.95	24.91	24.43	24.49	24.40	22.34	21.98	23.08	23.67	23.70	23.61
		12	6	25.92	26.00	25.92	24.45	24.42	24.41	22.38	21.99	23.03	24.66	24.67	24.66
		24	0	24.98	24.98	24.94	24.41	24.44	24.44	22.33	21.97	23.08	23.68	23.66	23.65
	16QAM	1	0	23.92	23.98	23.92	23.58	23.56	23.50	22.40	21.93	23.09	22.65	22.62	22.62
		1	1	24.94	24.91	24.95	24.45	24.44	24.48	22.38	21.99	23.09	23.69	23.68	23.67
		1	22	24.93	24.99	24.92	24.41	24.42	24.46	22.35	21.93	23.03	23.67	23.61	23.67
		1	23	23.93	23.99	23.95	23.56	23.56	23.52	22.33	21.98	23.06	22.61	22.65	22.63
		12	6	24.98	24.99	24.95	24.44	24.44	24.48	22.38	21.99	23.03	23.61	23.64	23.68
		24	0	24.00	23.96	24.00	23.55	23.55	23.52	22.39	21.99	23.00	22.69	22.65	22.69
	64QAM	1	0	23.46	23.50	23.45	23.08	23.07	23.03	22.32	21.94	23.10	22.19	22.12	22.15
		1	1	23.42	23.42	23.42	23.03	23.04	23.06	22.34	21.96	23.07	22.19	22.20	22.18
		1	22	23.40	23.49	23.47	23.04	23.05	23.06	22.31	21.97	23.06	22.17	22.18	22.13
		1	23	23.45	23.43	23.48	23.05	23.09	23.05	22.32	21.93	23.05	22.16	22.13	22.15
		12	6	23.41	23.47	23.42	23.08	23.02	23.09	22.31	21.92	23.09	22.19	22.16	22.13
		24	0	23.41	23.49	23.47	23.01	23.06	23.08	22.38	21.90	23.08	22.12	22.14	22.16
	256QAM	1	0	21.49	21.42	21.41	21.01	21.07	21.06	21.44	21.52	21.51	20.16	20.15	20.13
		1	1	21.50	21.43	21.45	21.04	21.02	21.07	21.43	21.54	21.59	20.16	20.12	20.15
		1	22	21.42	21.46	21.50	21.06	21.07	21.49	21.51	21.58	20.11	20.18	20.12	20.12
		1	23	21.43	21.46	21.46	21.09	21.03	21.04	21.49	21.51	21.58	20.11	20.16	20.11
		12	6	21.43	21.45	21.41	21.02	21.00	21.00	21.42	21.49	21.55	20.13	20.18	20.18
		24	0	21.48	21.43	21.49	21.04	21.03	21.08	21.47	21.53	21.57	20.17	20.12	20.12

OUTPUT POWER FOR 5G NR n48 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 7			ANT 8			ANT 9			ANT 4		
				637166	641333	646166	637166	641333	646166	637166	641333	646166	637166	641333	646166
15.0	BPSK	1	0	25.49	25.45	25.40	24.48	24.40	24.42	22.33	21.93	23.07	24.18	24.18	24.18
		1	1	25.93	25.97	25.97	24.50	24.48	24.42	22.39	21.95	23.07	24.67	24.70	24.62
		1	36	25.90	26.00	25.97	24.50	24.49	24.43	22.33	21.94	23.06	24.68	24.69	24.61
		1	37	25.41	25.50	25.42	24.45	24.47	24.49	22.40	21.95	23.09	24.62	24.64	24.65
		18	9	25.90	25.90	26.00	24.41	24.48	24.41	22.33	21.95	23.09	24.62	24.64	24.65
		36	0	25.44	25.43	25.47	24.46	24.40	24.49	22.35	21.92	23.02	24.15	24.13	24.18
	QPSK	1	0	24.97	24.90	24.96	24.47	24.44	24.43	22.37	21.93	23.00	23.69	23.64	23.68
		1	1	25.98	25.90	25.96	24.49	24.48	24.42	22.34	21.92	23.04	24.61	24.70	24.62
		1	36	25.98	25.95	25.92	24.49	24.46	24.40	22.32	22.00	23.06	24.63	24.65	24.65
		1	37	24.94	24.93	25.00	24.50	24.43	24.42	22.31	21.92	23.03	23.70	23.62	23.68
		18	9	26.00	25.97	25.96	24.43	24.40	24.45	22.34	21.92	23.06	24.66	24.63	24.65
		36	0	24.96	24.92	24.95	24.41	24.50	24.46	22.35	21.94	23.01	23.67	23.64	23.67
	16QAM	1	0	23.97	23.91	23.97	23.51	23.51	23.50	22.37	21.95	23.07	22.64	22.68	22.68
		1	1	24.96	24.94	24.95	24.47	24.48	24.50	22.35	21.99	23.07	23.66	23.66	23.60
		1	36	24.94	24.96	24.91	24.45	24.42	24.41	22.39	21.93	23.05	23.60	23.65	23.64
		1	37	23.95	23.96	23.94	23.56	23.53	23.60	22.39	21.92	23.04	22.62	22.69	22.69
		18	9	24.98	24.93	24.92	24.43	24.44	24.47	22.36	21.98	23.01	23.67	23.61	23.66
		36	0	23.94	23.97	23.93	23.55	23.57	23.55	22.37	21.98	23.09	22.67	22.66	22.67
	64QAM	1	0	23.49	23.46	23.40	23.05	23.04	23.07	22.30	21.90	23.08	22.14	22.19	22.20
		1	1	23.43	23.41	23.42	23.01	23.06	23.10	22.36	21.97	23.03	22.19	22.11	22.20
		1	36	23.46	23.41	23.40	23.05	23.10	23.04	22.38	21.99	23.08	22.10	22.18	22.13
		1	37	23.47	23.47	23.46	23.10	23.03	23.08	22.37	21.92	23.02	22.11	22.13	22.13
		18	9	23.44	23.45	23.47	23.05	23.02	23.01	22.36	21.97	23.05	22.12	22.18	22.18
		36	0	23.49	23.41	23.46	23.09	23.07	23.04	22.37	21.99	23.04	22.20	22.13	22.10
	256QAM	1	0	21.46	21.48	21.40	21.03	21.01	21.09	21.47	21.51	21.55	20.13	20.16	20.10
		1	1	21.40	21.40	21.42	21.00	21.07	21.10	21.40	21.52	21.54	20.16	20.11	20.16
		1	36	21.44	21.48	21.44	21.05	21.01	21.04	21.40	21.52	21.54	20.16	20.10	20.14
		1	37	21.42	21.46	21.46	21.10	21.04	21.05	21.4					

OUTPUT POWER FOR 5G NR n48 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 7				ANT 8				ANT 9			
				637333	641333	646000	3560.0	3620.0	3690.0	3560.0	3620.0	3690.0	3560.0	3620.0	3690.0
20.0	BPSK	1	0	25.48	25.46	25.50	24.49	24.42	24.48	22.31	21.97	23.04	24.15	24.18	24.14
		1	1	25.90	25.93	25.97	24.43	24.47	24.48	22.32	21.97	23.05	24.68	24.69	24.64
		1	49	25.97	25.98	25.96	24.48	24.48	24.42	22.33	21.93	23.03	24.70	24.61	24.65
		1	50	25.49	25.45	25.45	24.45	24.48	24.46	22.34	21.94	23.10	24.18	24.19	24.18
		25	12	25.99	25.96	25.96	24.41	24.49	24.50	22.30	21.92	23.09	24.68	24.60	24.65
	QPSK	50	0	25.43	25.50	25.44	24.47	24.47	24.43	22.35	21.92	23.06	24.13	24.15	24.14
		1	0	24.96	24.99	24.95	24.43	24.50	24.49	22.37	21.96	23.05	23.68	23.68	23.63
		1	1	25.90	25.97	25.96	24.50	24.44	24.45	22.32	21.96	23.07	24.66	24.67	24.68
		1	49	25.91	25.99	25.91	24.44	24.41	24.49	22.31	21.95	23.06	24.65	24.63	24.63
		1	50	24.95	24.91	24.96	24.42	24.43	24.49	22.33	21.96	23.01	23.66	23.62	23.65
	16QAM	25	12	25.99	25.92	25.99	24.49	24.43	24.50	22.32	21.92	23.04	24.63	24.66	24.70
		50	0	25.00	25.00	24.91	24.48	24.41	24.47	22.39	21.98	23.00	23.66	23.66	23.65
		1	0	23.94	24.00	23.96	23.57	23.50	23.56	22.36	21.92	23.05	22.61	22.68	22.62
		1	1	24.94	24.92	24.94	24.42	24.42	24.47	22.39	21.93	23.04	23.67	23.63	23.62
		1	49	24.96	25.00	24.96	24.43	24.46	24.45	22.35	21.93	23.02	23.60	23.61	23.63
	64QAM	1	50	23.94	23.90	23.98	23.54	23.52	23.52	22.39	22.00	23.07	22.66	22.68	22.68
		25	12	24.92	24.92	24.95	24.47	24.43	24.45	22.30	21.91	23.01	23.61	23.68	23.64
		50	0	23.93	23.98	23.97	23.52	23.54	23.53	22.39	21.96	23.05	22.64	22.67	22.66
		1	0	23.48	23.44	23.45	23.01	23.04	23.08	22.33	21.95	23.02	22.10	22.18	22.15
		1	1	23.47	23.40	23.48	23.03	23.04	23.04	22.39	21.98	23.03	22.15	22.18	22.12
	256QAM	1	49	23.42	23.42	23.43	23.06	23.08	23.09	22.34	21.90	23.01	22.11	22.12	22.12
		1	50	23.43	23.45	23.43	23.04	23.07	23.06	22.39	22.00	23.02	22.15	22.12	22.19
		25	12	23.41	23.41	23.40	23.06	23.02	23.00	22.33	21.93	23.08	22.12	22.19	22.18
		50	0	23.43	23.46	23.45	23.03	23.09	23.05	22.33	21.91	23.08	22.16	22.17	22.17
		1	0	21.49	21.42	21.49	21.04	21.03	21.05	21.42	21.47	21.58	20.12	20.13	20.16
	256QAM	1	1	21.45	21.47	21.46	21.02	21.06	21.03	21.50	21.51	21.51	20.17	20.15	20.17
		1	49	21.47	21.47	21.49	21.02	21.04	21.09	21.47	21.45	21.52	20.11	20.13	20.19
		1	50	21.49	21.49	21.44	21.02	21.06	21.05	21.45	21.50	21.56	20.12	20.13	20.18
		25	12	21.49	21.50	21.47	21.10	21.02	21.03	21.45	21.51	21.55	20.20	20.10	20.11
		50	0	21.42	21.41	21.50	21.07	21.03	21.05	21.49	21.48	21.59	20.15	20.12	20.16

OUTPUT POWER FOR 5G NR n48 (30.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)												
				ANT 7				ANT 8				ANT 9				
				637666	641666	645666	3565.0	3625.0	3685.0	3565.0	3625.0	3685.0	3565.0	3625.0	3685.0	
30.0	BPSK	1	0	25.42	25.43	25.50	24.41	24.44	24.43	22.37	21.91	23.01	24.16	24.12	24.15	
		1	1	25.98	25.93	25.94	24.45	24.49	24.43	22.32	21.99	23.09	24.66	24.67	24.64	
		1	76	26.00	25.92	25.97	24.48	24.45	24.45	22.33	21.99	23.02	24.62	24.68	24.67	
		1	77	25.44	25.42	25.41	24.42	24.42	24.40	22.39	21.91	23.04	24.18	24.20	24.10	
		36	18	25.91	25.90	26.00	24.40	24.46	24.50	22.33	21.94	23.04	24.62	24.69	24.61	
	QPSK	75	0	19.94	25.47	20.00	19.54	24.40	19.60	20.00	20.00	21.95	20.00	18.69	24.13	18.70
		1	0	24.93	24.93	24.95	24.44	24.41	24.43	22.33	21.92	23.05	23.63	23.66	23.68	
		1	1	25.98	25.93	25.99	24.42	24.50	24.44	22.33	21.93	23.09	24.61	24.61	24.70	
		1	76	25.91	26.00	25.92	24.47	24.46	24.47	22.33	21.90	23.04	24.67	24.60	24.68	
		1	77	24.99	24.95	24.94	24.40	24.47	24.46	22.31	21.91	23.02	23.68	23.67	23.67	
	16QAM	36	18	25.91	25.99	26.00	24.40	24.41	24.50	22.34	21.94	23.06	24.68	24.69	24.64	
		75	0	20.00	24.99	20.00	19.60	24.47	19.60	20.00	21.99	20.00	18.70	23.61	18.68	
		1	0	23.92	23.96	23.98	23.58	23.58	23.59	22.38	21.93	23.08	22.63	22.61	22.65	
		1	1	24.91	24.99	24.97	24.41	24.43	24.44	22.33	21.94	23.08	23.70	23.65	23.70	
		1	76	24.96	24.91	24.97	24.43	24.45	24.46	22.36	21.95	23.04	23.68	23.68	23.60	
	64QAM	1	77	23.91	23.93	23.95	23.59	23.53	23.56	22.33	21.93	23.08	23.66	23.64	23.64	
		36	18	24.96	24.92	24.94	24.50	24.41	24.43	22.33	21.93	23.08	23.66	23.64	23.64	
		75	0	19.97	23.97	20.00	19.60	23.60	19.52	20.00	21.96	20.00	18.70	22.64	18.70	
		1	0	23.41	23.46	23.48	23.05	23.07	23.02	22.37	21.91	23.09	22.13	22.19	22.15	
		1	1	23.46	23.46	23.41	23.01	23.10	23.02	22.32	21.94	23.03	22.17	22.12	22.15	
	256QAM	1	76	23.48	23.40	23.41	23.07	23.07	23.01	22.34	21.93	23.01	22.18	22.14	22.19	
		1	77	23.42	23.42	23.46	23.09	23.08	23.08	22.36	21.98	23.06	22.15	22.20	22.16	
		36	18	23.43	23.45	23.48	23.04	23.02	23.02	22.38	21.99	23.03	22.13	22.13	22.18	
		75	0	20.00	23.47	19.93	19.60	23.00	19.56	20.00	21.99	20.00	18.69	22.12	18.70	
		1	0	21.50	21.43	21.41	21.02	21.04	21.08	21.47	21.53	21.57	20.18	20.13	20.17	
	256QAM	1	1	21.45	21.49	21.42	21.01	21.03	21.04	21.43						

OUTPUT POWER FOR 5G NR n48 (40.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 7			ANT 8			ANT 9			ANT 4		
				638000	641333	645333	638000	641333	645333	638000	641333	645333	638000	641333	645333
40.0	BPSK	1	0	25.42	25.47	25.40	24.40	24.45	24.40	22.37	21.90	23.05	24.12	24.13	24.12
		1	1	25.99	25.92	25.97	24.46	24.41	24.49	22.36	21.99	23.06	24.65	24.62	24.69
		1	104	25.99	25.92	25.94	24.46	24.44	24.48	22.37	21.92	23.10	24.63	24.67	24.61
		1	105	25.45	25.46	25.49	24.46	24.49	24.45	22.34	21.97	23.02	24.15	24.10	24.10
		50	25	25.99	25.97	26.00	24.49	24.48	24.40	22.35	21.99	23.03	24.64	24.68	24.62
	QPSK	100	0	19.99	25.44	20.00	19.51	24.44	19.60	20.00	21.96	20.00	18.70	24.19	18.64
		1	0	24.90	24.97	24.91	24.44	24.47	24.45	22.37	22.00	23.06	23.68	23.67	23.68
		1	1	25.98	25.98	25.99	24.49	24.44	24.50	22.35	21.94	23.07	24.67	24.69	24.63
		1	104	25.97	25.92	25.95	24.48	24.42	24.46	22.35	21.91	23.03	24.60	24.67	24.61
		1	105	24.92	24.99	24.97	24.50	24.45	24.40	22.34	21.95	23.02	23.68	23.67	23.60
	16QAM	50	25	25.95	25.91	25.92	24.47	24.45	24.48	22.35	21.96	23.06	24.61	24.67	24.70
		100	0	20.00	24.95	19.95	19.60	24.44	19.52	20.00	21.93	20.00	18.69	23.69	18.70
		1	0	23.97	23.97	23.96	23.54	23.56	23.59	22.34	22.00	23.03	22.68	22.62	22.65
		1	1	24.98	24.99	24.98	24.47	24.40	24.41	22.38	21.93	23.06	23.63	23.61	23.65
		1	104	24.95	24.94	24.90	24.46	24.41	24.46	22.37	21.98	23.07	23.65	23.64	23.68
	64QAM	1	105	23.97	23.97	23.99	23.54	23.59	23.59	22.31	21.96	23.03	22.67	22.62	22.60
		50	25	24.96	24.93	24.98	24.48	24.42	24.44	22.34	21.96	23.01	23.64	23.63	23.66
		100	0	20.00	23.97	19.99	19.58	23.58	19.60	20.00	21.99	20.00	18.68	22.68	18.70
		1	0	23.49	23.49	23.46	23.08	23.02	23.05	22.34	21.97	23.07	22.15	22.13	22.18
		1	1	23.40	23.48	23.41	23.08	23.06	23.09	22.32	21.99	23.07	22.20	22.16	22.16
	256QAM	1	104	23.41	23.43	23.47	23.10	23.10	23.06	22.33	21.98	23.06	22.13	22.18	22.12
		1	105	23.46	23.47	23.42	23.07	23.02	23.07	22.40	22.00	23.00	22.15	22.11	22.14
		50	25	23.46	23.47	23.48	23.03	23.01	23.01	22.38	21.92	23.04	22.16	22.18	22.12
		100	0	20.00	23.45	19.96	19.60	23.08	19.60	20.00	21.92	20.00	18.64	22.14	18.70
		1	0	21.48	21.49	21.46	21.07	21.05	21.08	21.47	21.47	21.59	20.17	20.19	20.20
	256QAM	1	1	21.46	21.48	21.48	21.07	21.03	21.05	21.48	21.50	21.58	20.16	20.13	20.19
		1	104	21.45	21.42	21.49	21.05	21.08	21.10	21.40	21.55	21.55	20.16	20.19	20.10
		1	105	21.41	21.46	21.50	21.07	21.07	21.10	21.42	21.46	21.58	20.13	20.16	20.13
		50	25	21.49	21.48	21.49	21.04	21.07	21.08	21.44	21.48	21.58	20.17	20.20	20.12
		100	0	20.00	21.45	19.98	19.60	21.03	19.53	20.00	21.46	20.00	18.66	20.18	18.70

8.2. LTE ULCA BAND 48

Test Engineer ID:	25780	Test Date:	2024-02-28
-------------------	-------	------------	------------

OUTPUT POWER FOR LTE BAND 48 (5.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1		PCC		SCC1		SCC1		Conducted Average (dBm)												ANT 4				
		RB Size	Offset	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM							
5MHz / 20MHz	3553.3	3565.0	1	24	1	0	20.41	20.50	20.42	20.34	20.01	20.10	20.01	20.02	20.39	20.50	20.41	20.40	19.11	19.20	19.13	19.08	12.69	12.70	12.68	12.66
	3615.8	3627.5	1	24	1	0	13.99	14.00	13.84	13.87	13.60	13.59	13.60	13.60	14.00	13.95	13.91	13.98	22.58	22.70	21.54	19.59	21.93	21.69	20.87	19.70
	3678.3	3690.0	25	0	100	0	21.99	22.00	21.96	21.00	21.60	21.59	21.60	21.60	20.6	21.98	22.00	21.95	21.00	20.64	20.64	20.70	19.70	19.14	19.20	19.13

OUTPUT POWER FOR LTE BAND 48 (20.0MHz + 5.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1		PCC		SCC1		SCC1		Conducted Average (dBm)												ANT 4				
		RB Size	Offset	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM							
20MHz / 5MHz	3560.0	3571.7	1	99	1	0	20.46	20.42	20.49	20.50	20.04	19.92	19.97	20.10	20.50	20.45	20.47	20.46	19.20	19.17	19.18	19.15	12.69	12.70	12.68	12.66
	3622.5	3634.2	100	0	25	0	14.00	13.98	13.83	13.86	13.57	13.60	13.54	13.56	13.87	13.81	13.82	14.00	12.69	12.70	12.68	12.66	21.93	22.00	21.54	19.59
	3685.0	3696.7	100	0	25	0	24.00	23.17	23.29	20.90	23.60	23.55	23.59	20.51	21.93	21.96	22.00	20.93	22.70	20.57	19.72	19.61	19.20	19.17	19.18	19.15

OUTPUT POWER FOR LTE BAND 48 (10.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1		PCC		SCC1		SCC1		Conducted Average (dBm)												ANT 4						
		RB Size	Offset	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM									
10MHz / 20MHz	3555.5	3569.9	1	49	1	0	20.00	19.90	19.87	19.66	19.60	19.60	19.59	19.54	19.95	19.96	20.00	19.99	18.63	18.70	18.65	18.65	13.70	13.68	13.67	13.69		
	3615.6	3630.0	50	0	100	0	15.00	14.85	14.86	14.85	14.57	14.56	14.58	14.60	15.00	14.94	14.95	15.00	13.70	13.68	13.66	13.68	12.69	12.70	12.68	12.66		
	3675.6	3690.0	1	49	1	0	24.47	24.50	24.00	20.84	24.10	24.10	23.60	20.43	21.98	22.00	21.50	20.87	23.14	23.20	22.70	19.61	21.93	21.69	21.00	20.16	20.20	19.70

OUTPUT POWER FOR LTE BAND 48 (20.0MHz + 10.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1		PCC		SCC1		SCC1		Conducted Average (dBm)												ANT 4				
		RB Size	Offset	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM							
20MHz / 10MHz	3560.0	3574.4	1	99	1	0	19.97	19.85	19.99	20.00	19.53	19.47	19.49	19.60	20.00	19.95	19.95	19.91	18.67	18.58	18.60	18.70	13.70	13.68	13.66	13.68
	3620.1	3634.5	100	0	50	0	15.00	14.83	14.88	14.83	14.58	14.56	14.58	14.60	14.98	14.95	14.95	15.00	13.70	13.68	13.66	13.68	12.69	12.70	12.68	12.66
	3680.1	3694.5	1	99	1	0	19.96	19.90	19.95	20.00	19.51	19.39	19.58	19.60	19.55	19.57	19.57	19.60	18.70	18.68	18.67	18.62	21.93	21.69	21.00	19.62

OUTPUT POWER FOR LTE BAND 48 (15.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1		PCC		SCC1		SCC1		Conducted Average (dBm)												ANT 4									
		RB Size	Offset	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM												
15MHz / 20MHz	3557.8	3574.9	1	74	1	0	19.95	19.99	19.98	20.00	19.55	19.59	19.57	19.60	19.86	19.91	19.91	20.00	19.90	18.70	18.67	18.64	18.63	13.70	13.68	13.66	13.69				
	3615.3	3632.4	75	0	100	0	15.00	14.83	14.86	14.84	14.57	14.56	14.56	14.60	14.84	14.92	14.92	15.00	14.98	13.66	13.70	13.68	13.66	12.69	12.70	12.68	12.66				
	3672.9	3690.0	75	0	100	0	21.50	21.48	21.46	21.49	21.00	21.10	21.09	21.08	20.60	21.50	21.48	21.47	21.93	20.92	20.88	23.69	23.70	22.70	19.61	21.93	21.69	21.00	20.12	20.20	19.70

OUTPUT POWER FOR LTE BAND 48 (20.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1		PCC		PCC		SCC1		SCC1		Conducted Average (dBm)											
		RB Size	Offset	RB	RB	RB	Offset	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
20MHz/ 20MHz	3560.0	3579.8	1	99	1	0	21.10	20.99	21.05	20.60	20.70	20.63	20.65	20.20	21.10	21.09	21.09	20.60	19.80	19.71	19.74	19.30	
			1	0	1	99	7.60	7.54	7.56	7.38	7.19	7.12	7.17	7.20	7.53	7.48	7.60	7.54	6.24	6.30	6.23	6.17	
			100	0	100	0	14.60	14.44	14.43	14.41	14.20	14.17	14.17	14.20	14.58	14.56	14.57	14.60	13.30	13.28	13.23	13.25	
	3615.1	3634.9	1	99	1	0	24.60	24.52	23.60	20.70	24.20	24.08	23.20	21.53	22.00	21.87	21.00	20.73	23.30	23.23	22.30	20.26	
			1	0	1	99	14.10	13.80	13.83	13.92	13.69	13.65	13.66	13.70	14.08	14.06	14.10	14.07	12.73	12.63	12.73	12.80	
			100	0	100	0	21.10	21.07	21.07	20.14	20.68	20.66	20.70	19.66	21.10	21.10	21.09	20.11	19.79	19.79	19.80	18.82	
	3670.2	3690.0	1	99	1	0	21.10	21.02	21.08	19.88	20.70	20.58	20.64	19.41	21.10	21.05	21.00	19.67	19.80	19.73	19.76	19.74	
			1	0	1	99	7.49	7.60	7.54	7.56	7.11	7.07	7.11	7.20	7.53	7.43	7.58	7.60	6.20	6.19	6.12	6.15	
			100	0	100	0	14.60	14.44	14.45	14.42	14.20	14.17	14.19	14.20	14.55	14.48	14.60	14.56	13.30	13.29	13.22	13.27	

9. CONDUCTED TEST RESULTS

9.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

RESULTS

There is no limit required and power is the same for low, middle, and high channel; therefore, only middle channel was tested. Worst-case plots (highest bandwidth) are reported only.

LTE BAND 48

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)	
LTE BAND 48	5MHz, QPSK	25/0	3625.0	4.471	4.80	
	5MHz, 16QAM			4.488	4.93	
	10MHz, QPSK	50/0		8.965	9.60	
	10MHz, 16QAM			8.980	9.35	
	15MHz, QPSK	75/0		13.303	14.22	
	15MHz, 16QAM			13.377	13.93	
	20MHz, QPSK	100/0		17.950	18.65	
	20MHz, 16QAM			17.864	18.71	
	20MHz, QPSK	1/0		0.282	0.469	

5G NR n48


Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)	
5G NR n48 (FCC)	10MHz, BPSK	24/0	3625	8.629	9.62	
	10MHz, QPSK			8.607	9.79	
	10MHz, 16QAM			8.611	9.48	
	15MHz, BPSK	36/0		12.847	14.10	
	15MHz, QPSK			12.893	14.50	
	15MHz, 16QAM			12.862	14.14	
	20MHz, BPSK	50/0		17.898	19.04	
	20MHz, QPSK			17.837	19.25	
	20MHz, 16QAM			17.872	19.38	
	30MHz, BPSK	75/0		26.871	28.09	
	30MHz, QPSK			26.738	28.33	
	30MHz, 16QAM			26.805	28.43	
	40MHz, BPSK	100/0		35.708	37.66	
	40MHz, QPSK			35.796	37.79	
	40MHz, 16QAM			35.779	37.80	
	100MHz, BPSK	1/0		0.478	0.787	

LTE ULCA BAND 48

Band	Mode	RB Allocation/RB Offset	f (MHz)	99% BW (MHz)	- 26dB BW (MHz)	
LTE BAND 48 (FCC)	5MHz + 20MHz BAND QPSK	25/0 + 100/0	3625	23.327	25.10	
	5MHz + 20MHz BAND 16QAM			23.211	24.97	
	20MHz + 5MHz BAND QPSK	100/0 + 25/0		23.324	25.02	
	20MHz + 5MHz BAND 16QAM			23.278	24.87	
	10MHz + 20MHz BAND QPSK	50/0 + 100/0		28.024	30.04	
	10MHz + 20MHz BAND 16QAM			28.038	29.89	
	20MHz + 10MHz BAND QPSK	100/0 + 50/0		28.116	29.95	
	20MHz + 10MHz BAND 16QAM			27.925	29.95	
	15MHz + 20MHz BAND QPSK	75/0 + 100/0		32.810	34.88	
	15MHz + 20MHz BAND 16QAM			32.803	34.87	
	20MHz + 15MHz BAND QPSK	100/0 + 75/0		32.781	34.92	
	20MHz + 15MHz BAND 16QAM			32.802	35.30	
	20MHz + 20MHz BAND QPSK	100/0 + 100/0		37.634	40.11	
	20MHz + 20MHz BAND 16QAM			37.735	40.05	

9.1.1. LTE BAND 48 AND 5G NR n48

LTE BAND 48

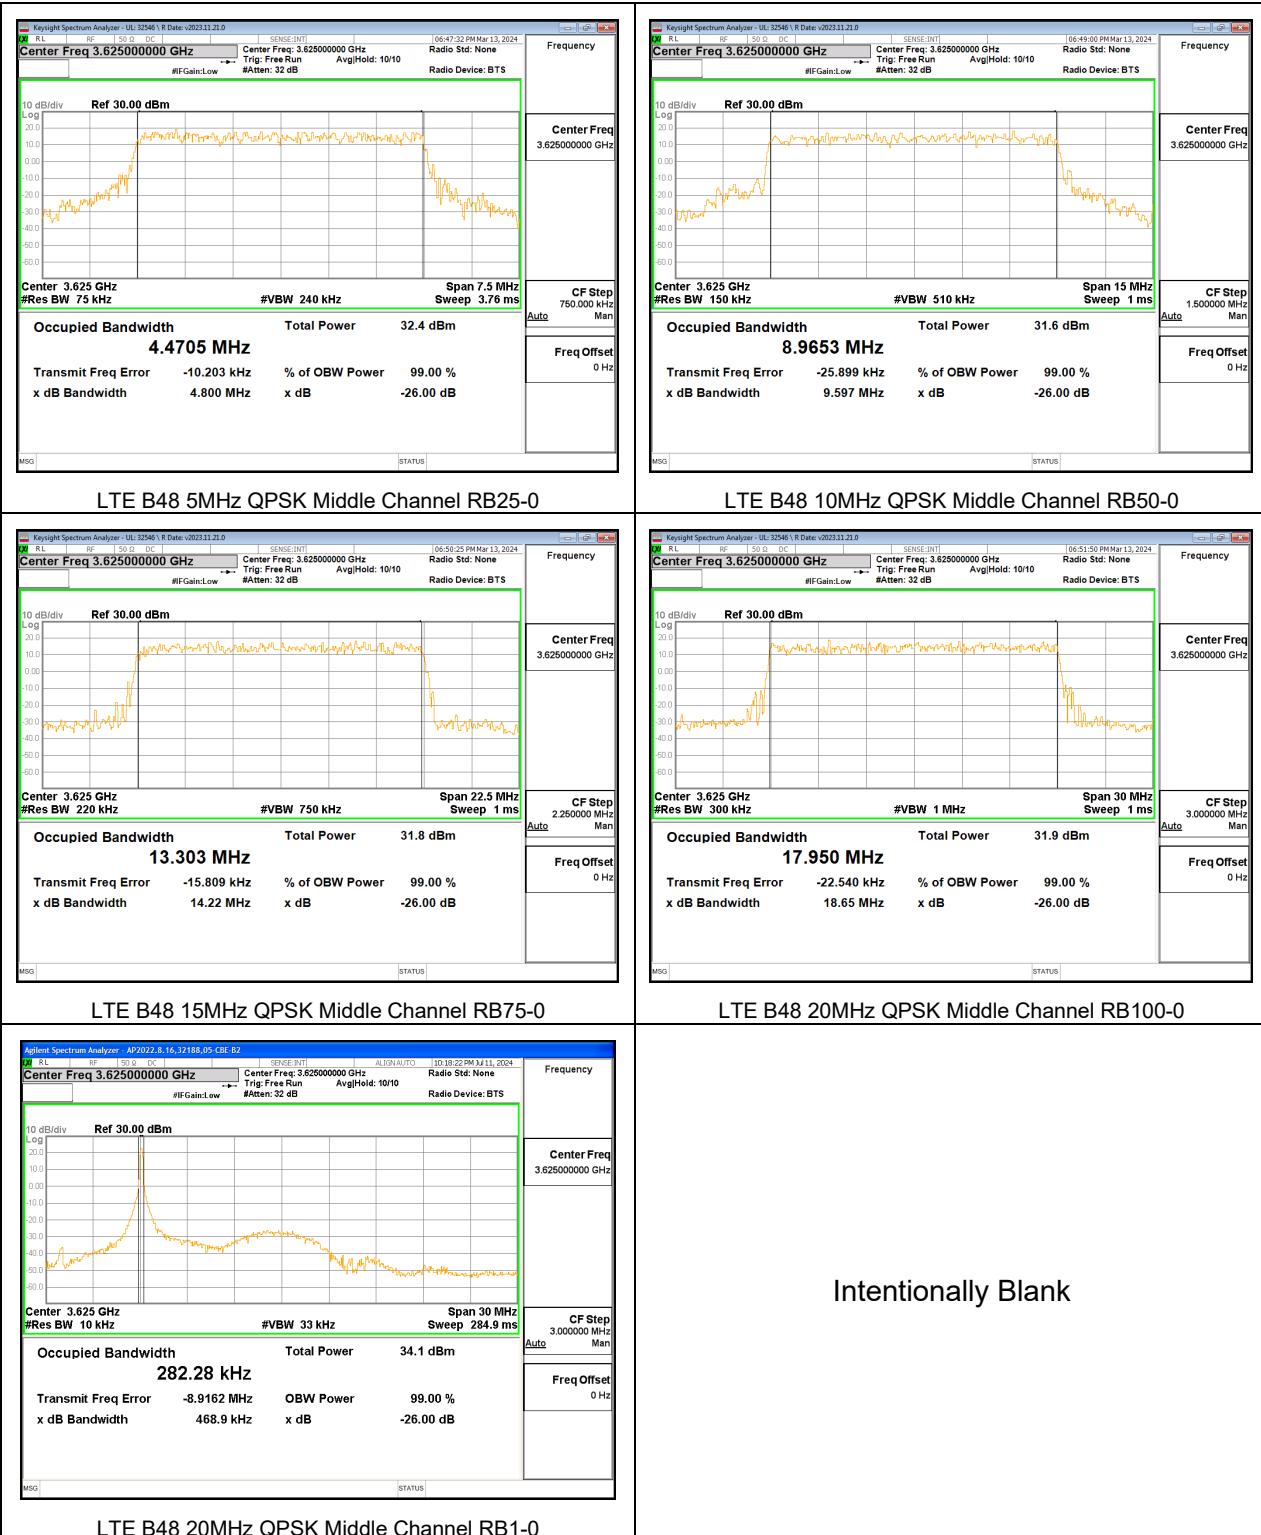


5G NR n48



9.1.2. LTE ULCA BAND 48



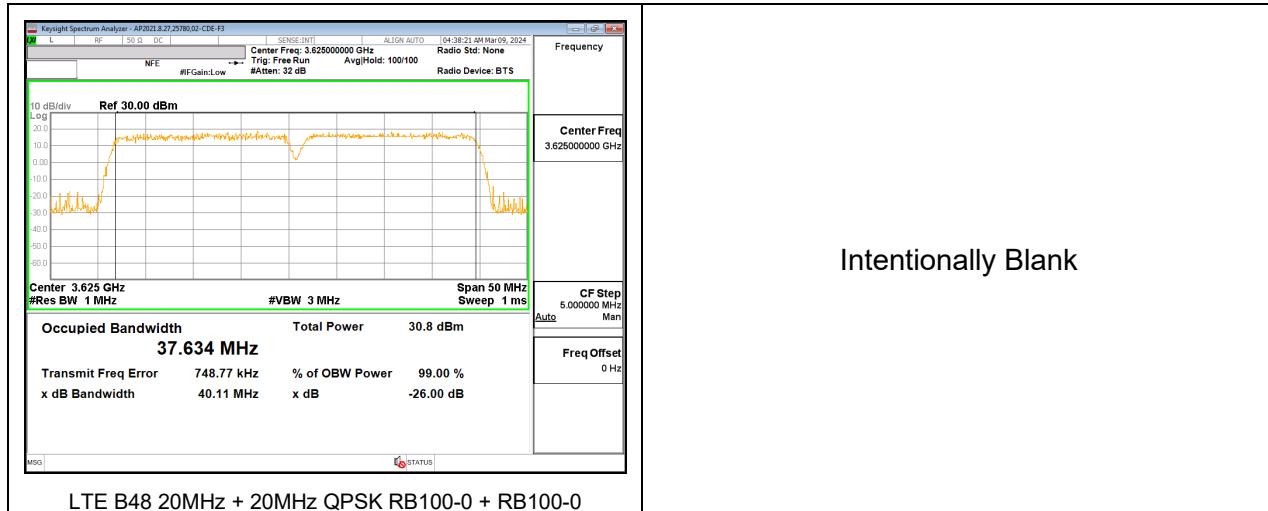

9.2. EMISSION MASK AND ADJACENT CHANNEL POWER

For Spectrum Emission Mask plots, the Keysight PXA N9030A is configured to sweep with a moving integration window, the width of which can be adjusted to different sizes across the sweep. The window width is configured to be greater than or equal to the required reference bandwidth. The center frequencies of the integration window for the different integration windows was set such that the upper and lower edges of the windows are aligned with the transition points in the reference bandwidths. This is achieved by setting the start / stop frequencies of the window with an offset equal to the reference bandwidth / 2 from the transition point.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

1. Set the spectrum analyzer span to include the block edge frequency.
2. Set a marker to point the corresponding band edge frequency in each test case.
3. Set display line at -13 dBm
4. Set resolution bandwidth to at least 1% of emission bandwidth.

TEST PROCEDURE (FCC LTE BAND 48)

(i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's authorized frequency channel, a resolution bandwidth of no less than one percent of the fundamental emission bandwidth may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full reference bandwidth (i.e., 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(ii) When measuring unwanted emissions to demonstrate compliance with the limits, the CBSD and End User Device nominal carrier frequency/channel shall be adjusted as close to the licensee's authorized frequency block edges, both upper and lower, as the design permits.

(iii) Compliance with emission limits shall be demonstrated using either average (RMS)-detected or peak-detected power measurement techniques.

RESULTS

LIMITS

FCC: §96.41

(e) 3.5 GHz Emissions and Interference Limits—


(1) General protection levels


(ii) Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz . Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.


(2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz , and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz .


9.2.1. LTE BAND 48 AND 5G NR n48


LTE BAND 48 EMISSION MASK

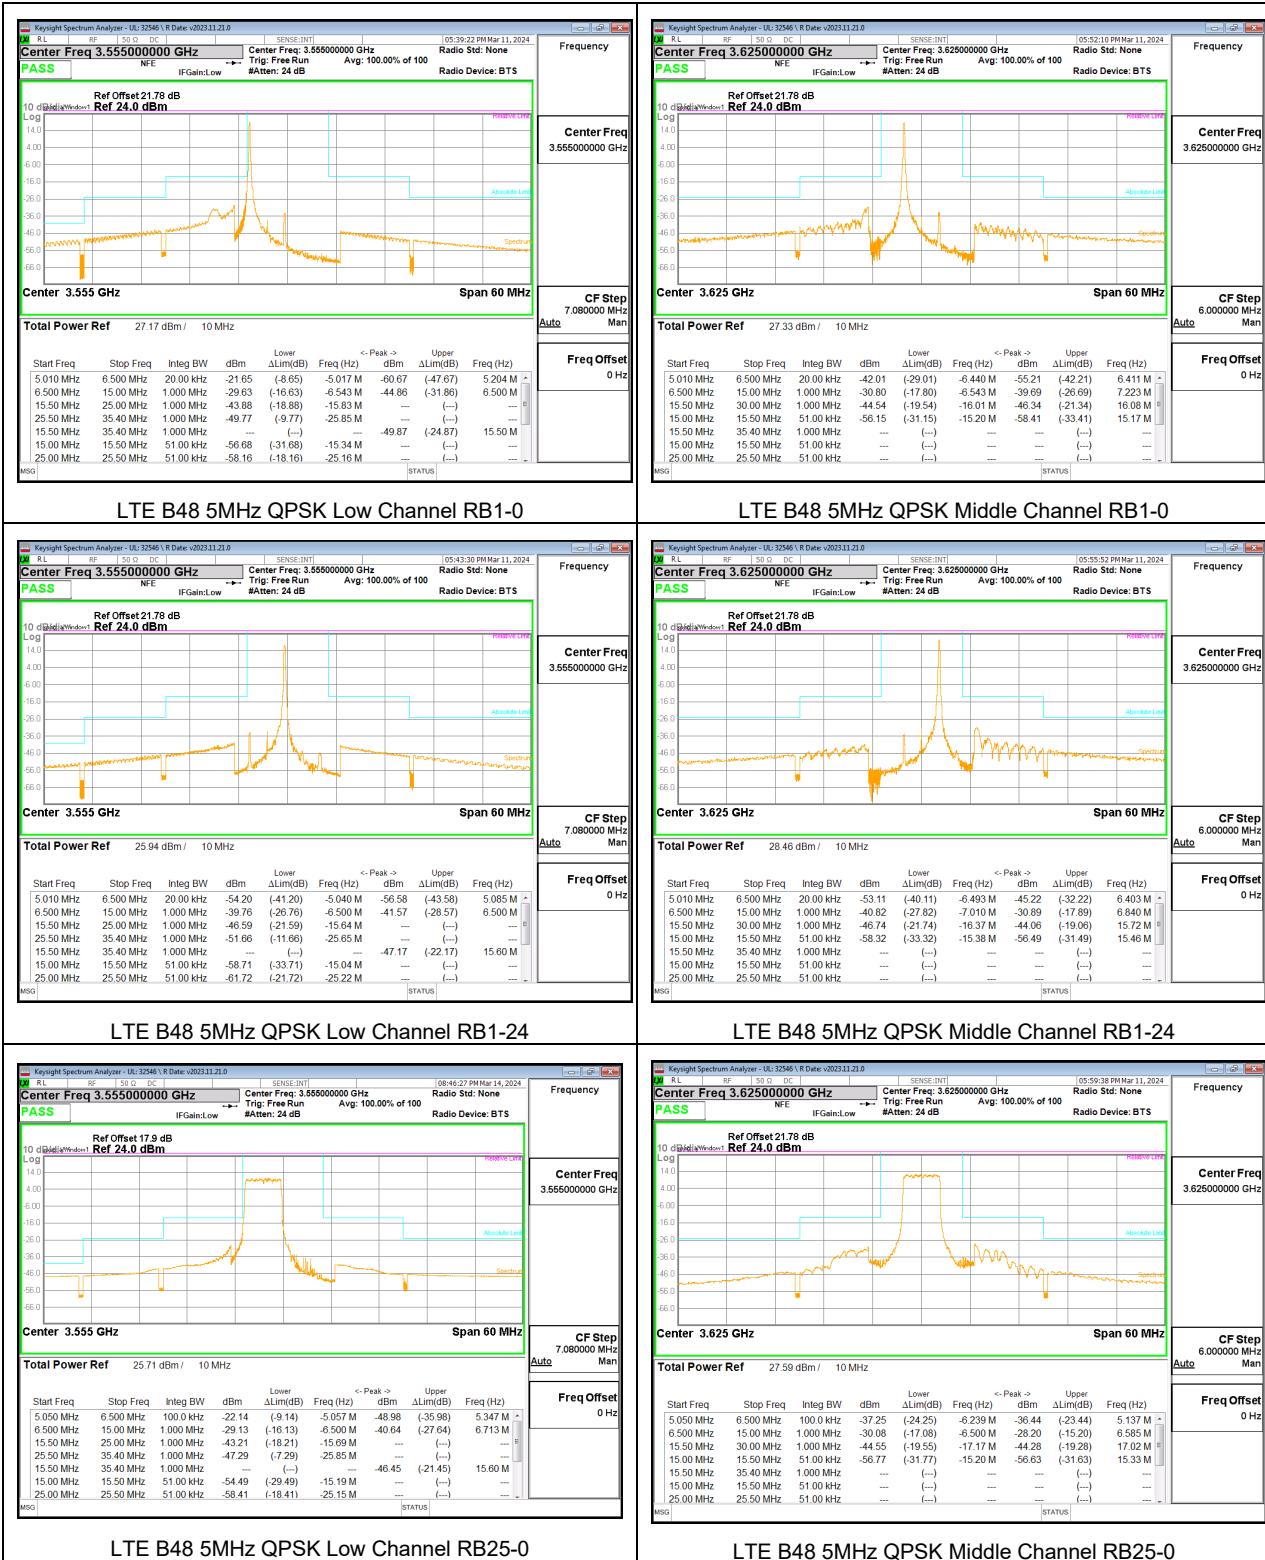


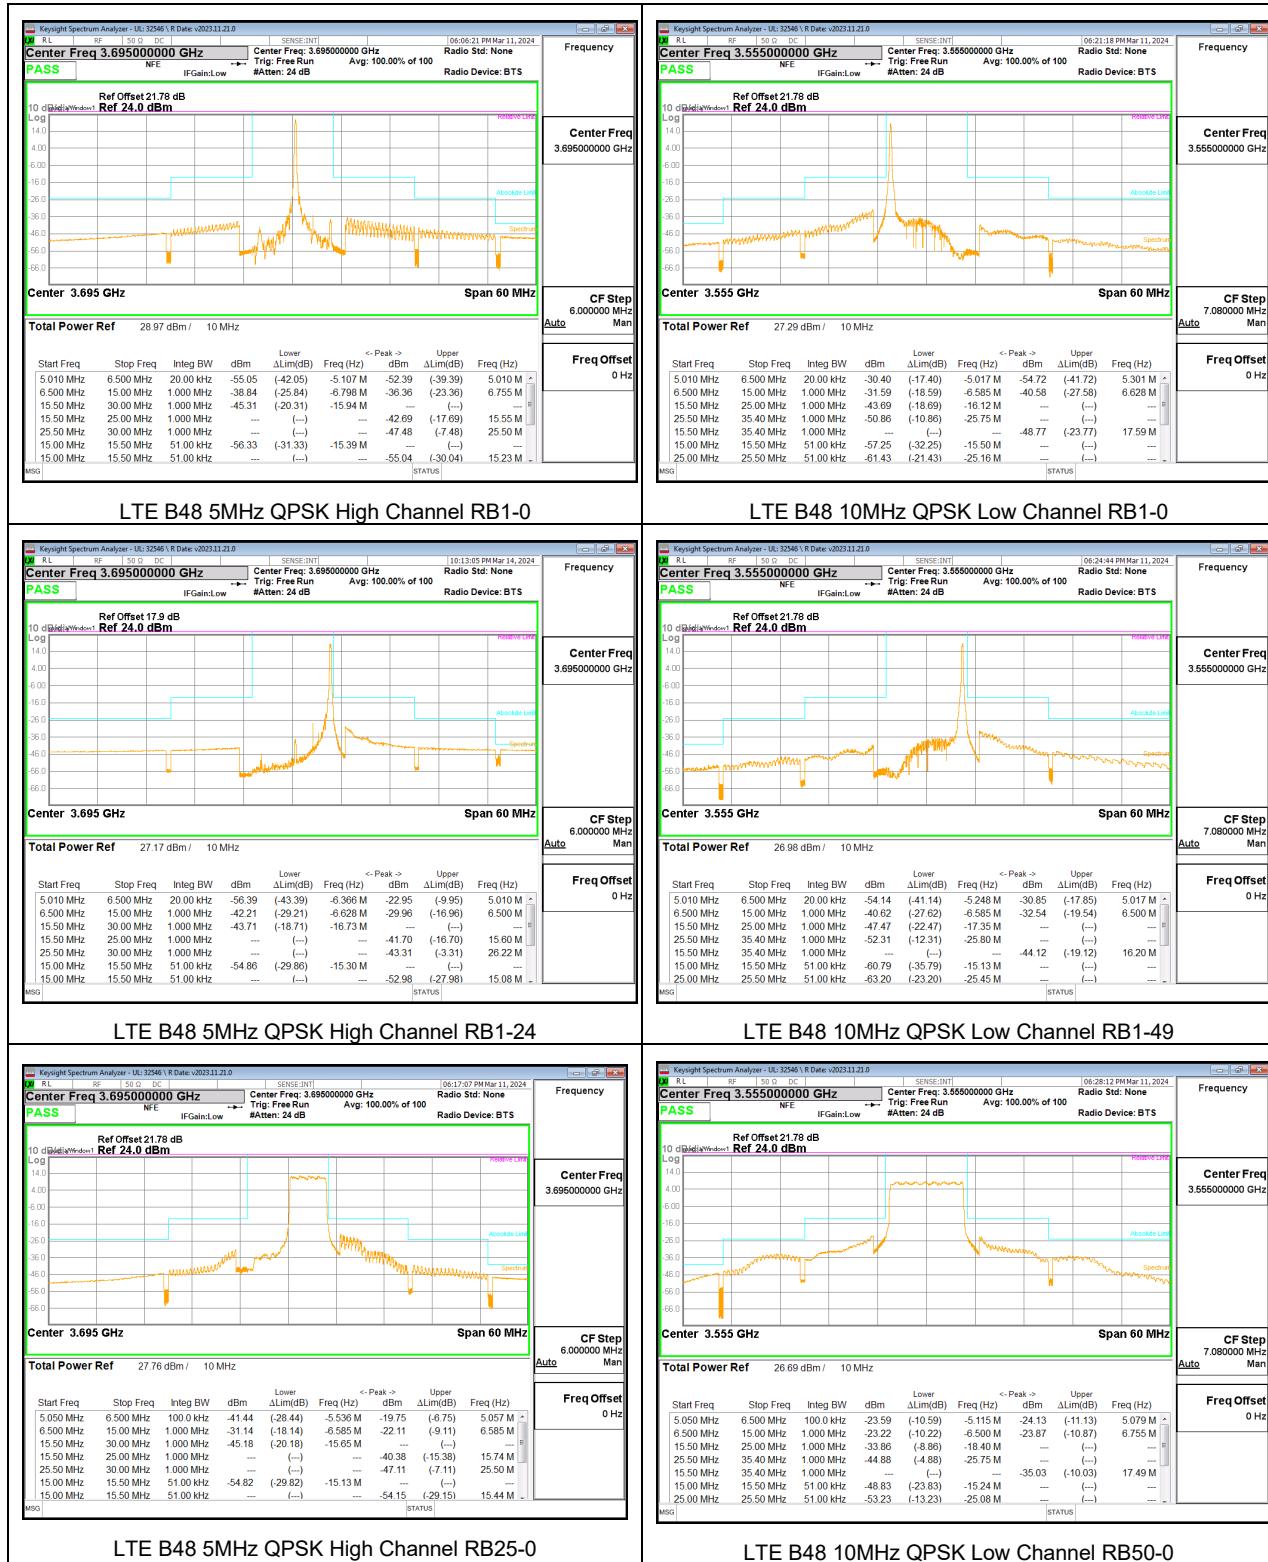

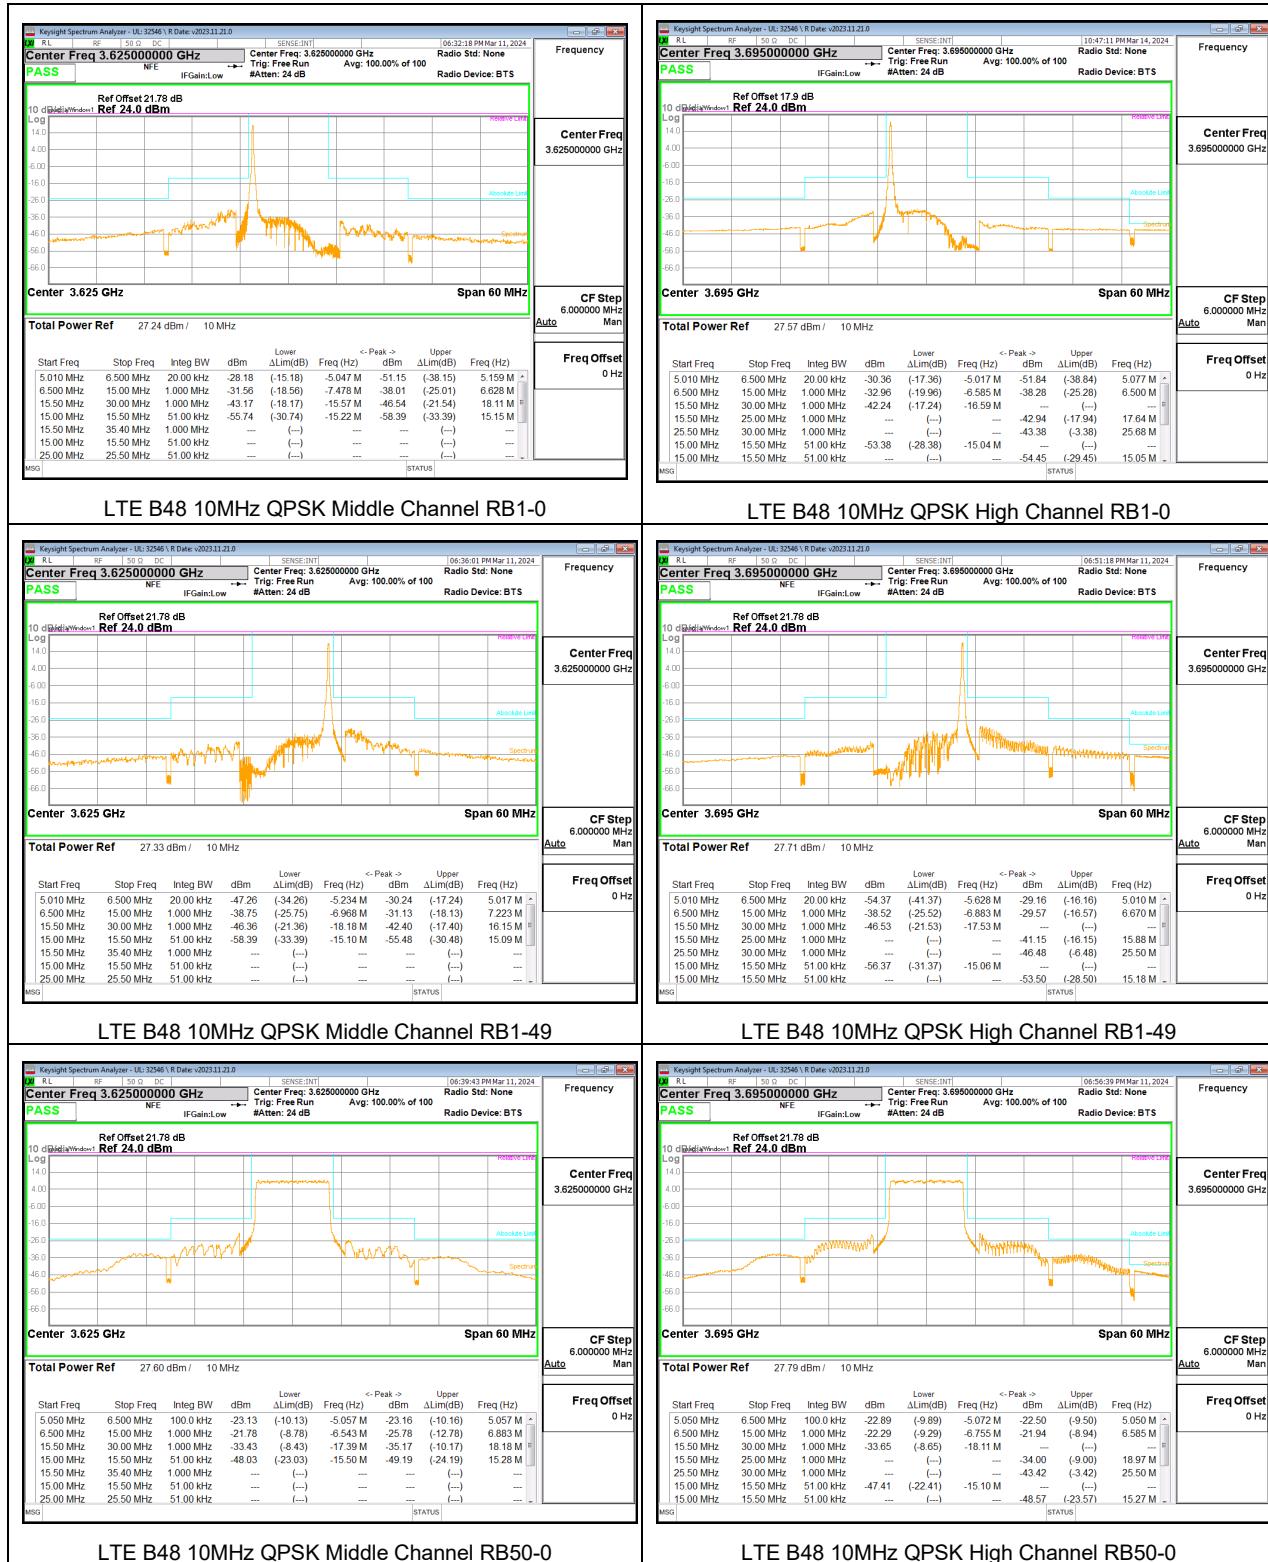

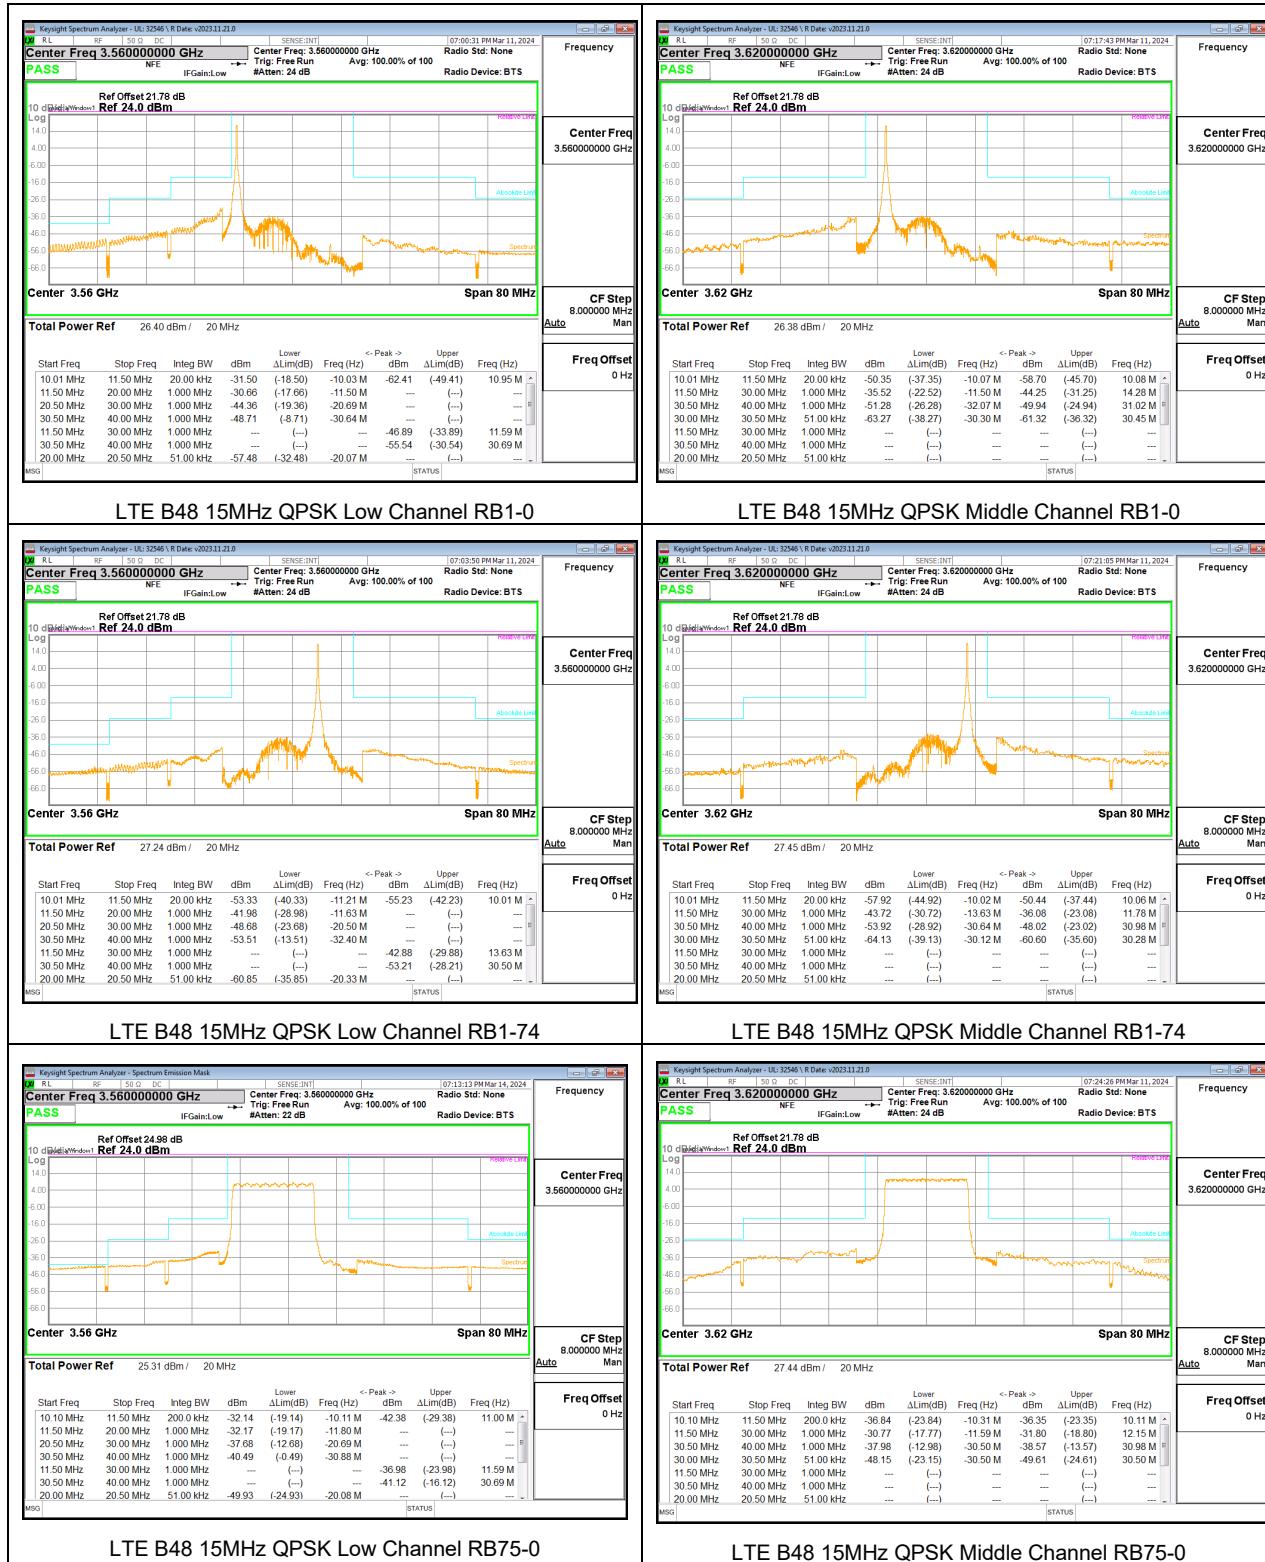


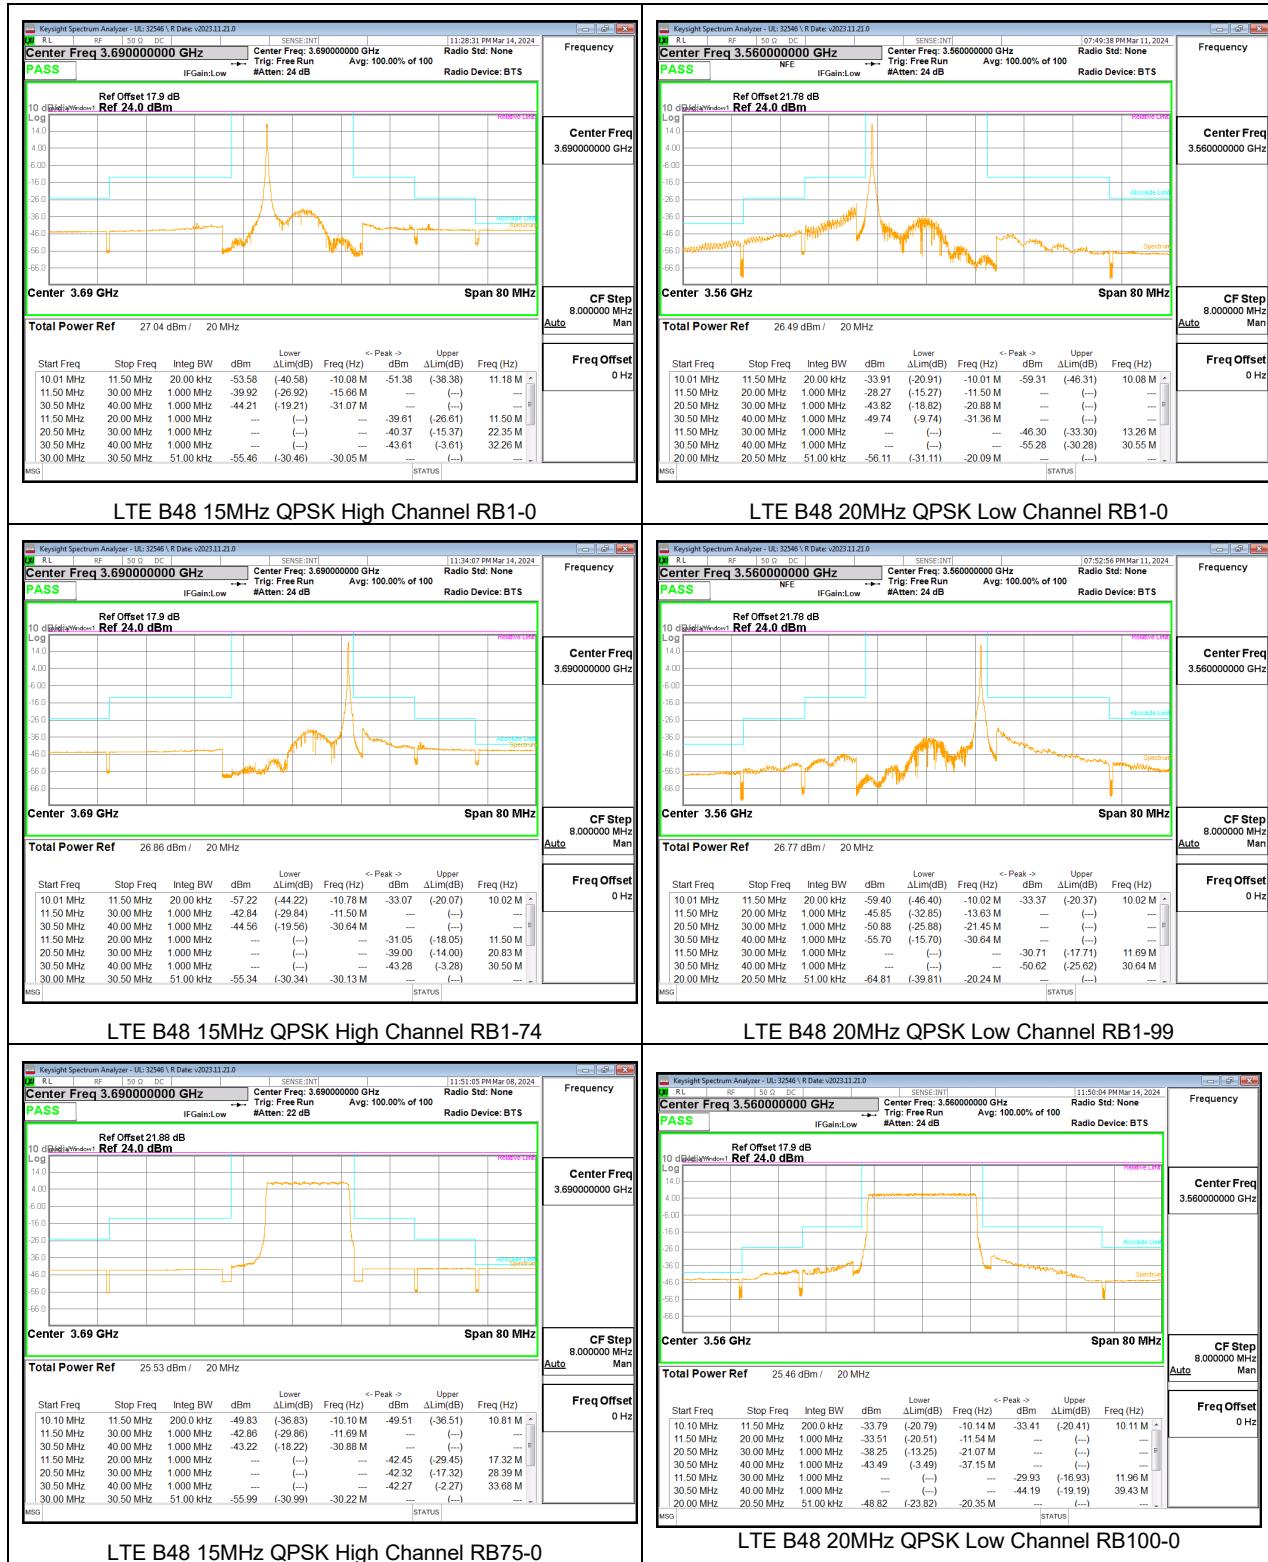

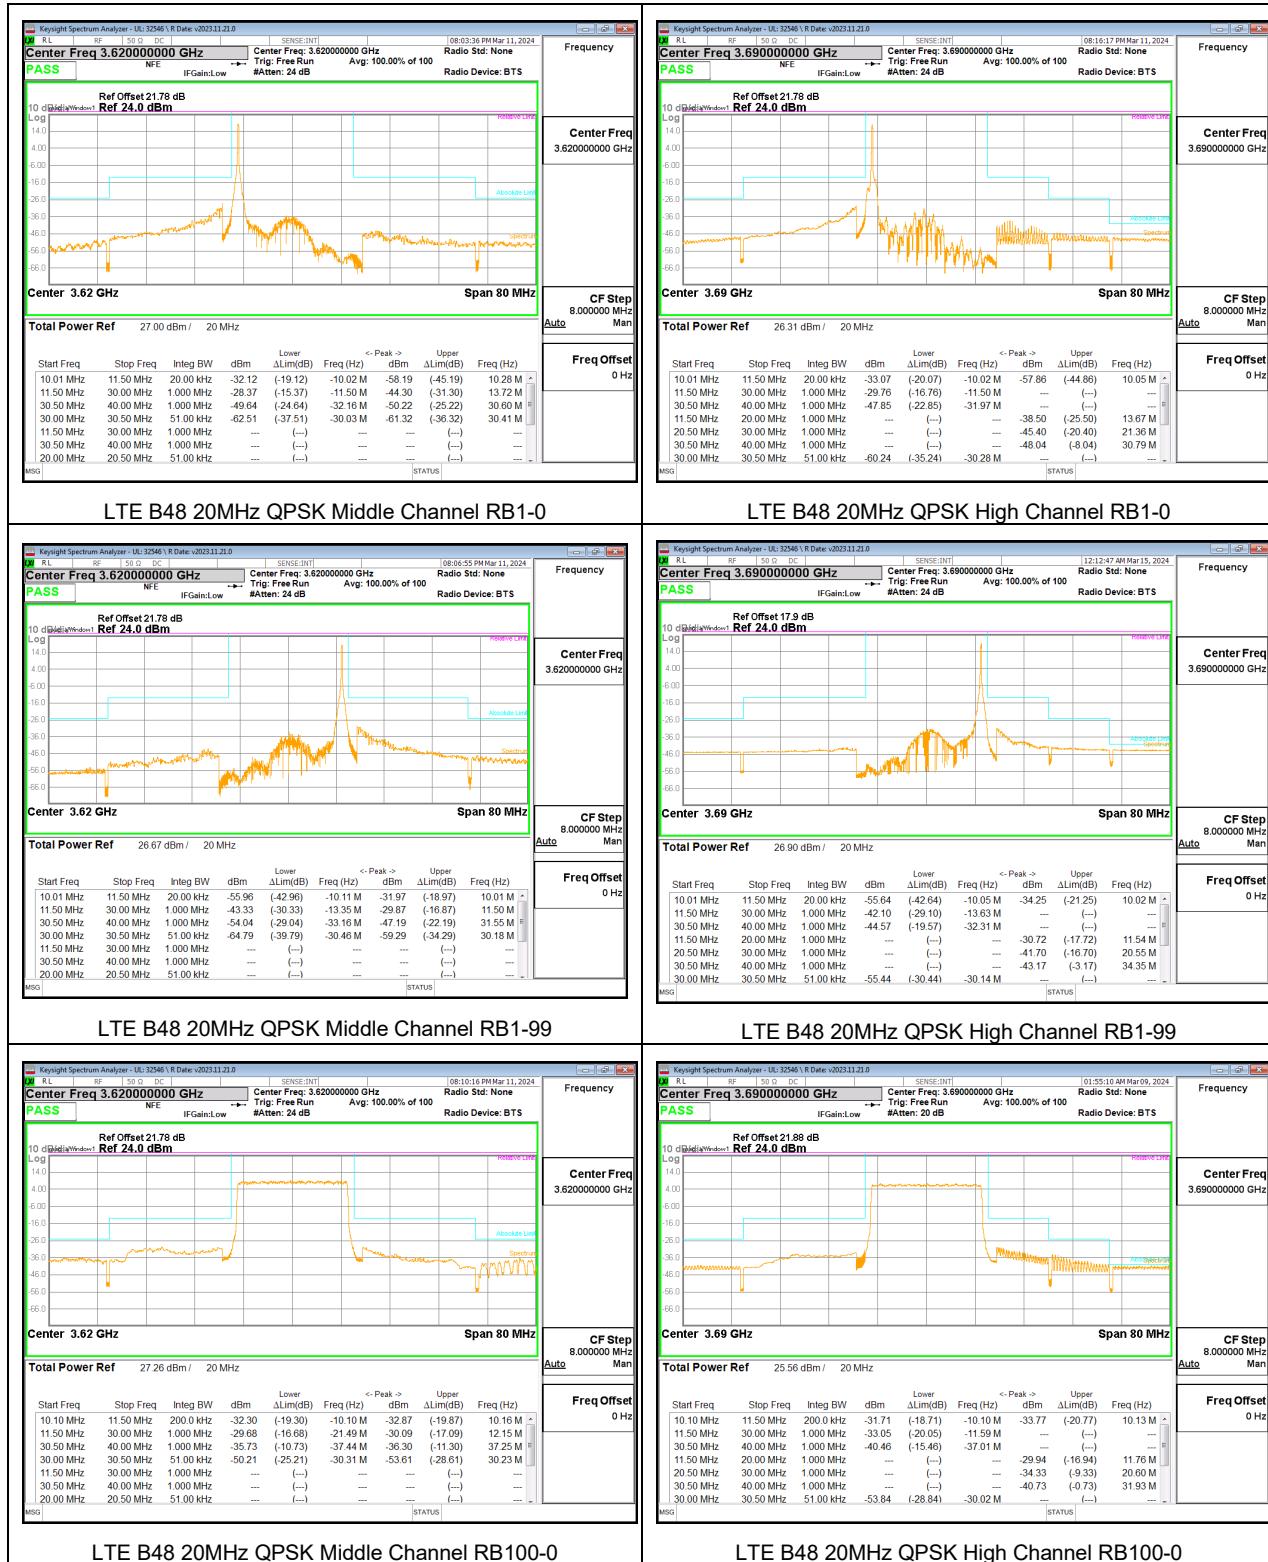


LTE BAND 48 ADJACENT CHANNEL POWER

LTE B48 5MHz QPSK Low Channel RB1-0

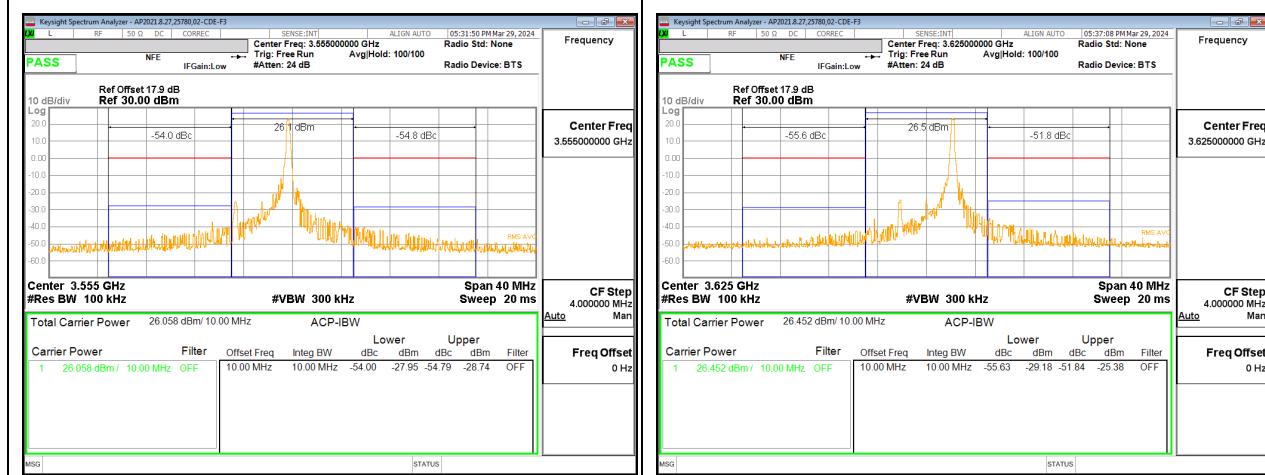


LTE B48 5MHz QPSK Middle Channel RB1-0

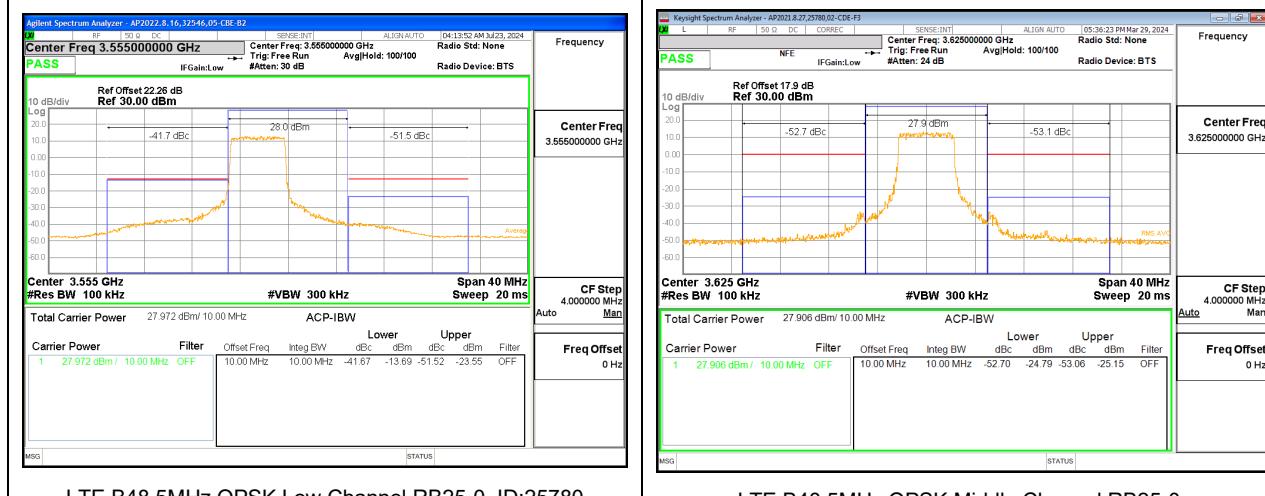


LTE B48 5MHz QPSK Low Channel RB1-24


LTE B48 5MHz QPSK Middle Channel RB1-24

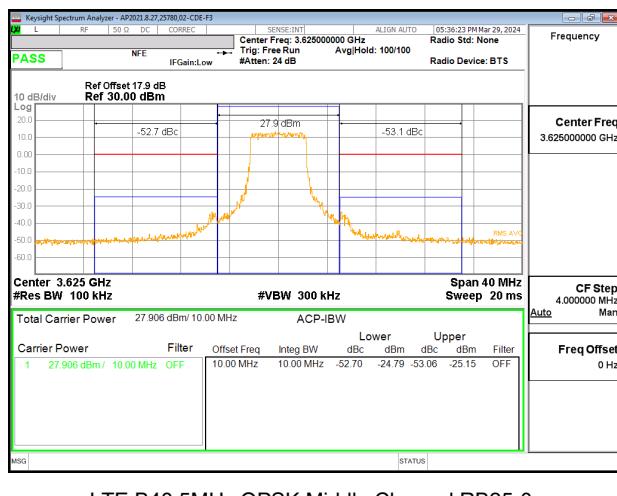


LTE B48 5MHz QPSK Low Channel RB25-0, ID:25780


LTE B48 5MHz QPSK Middle Channel RB25-0

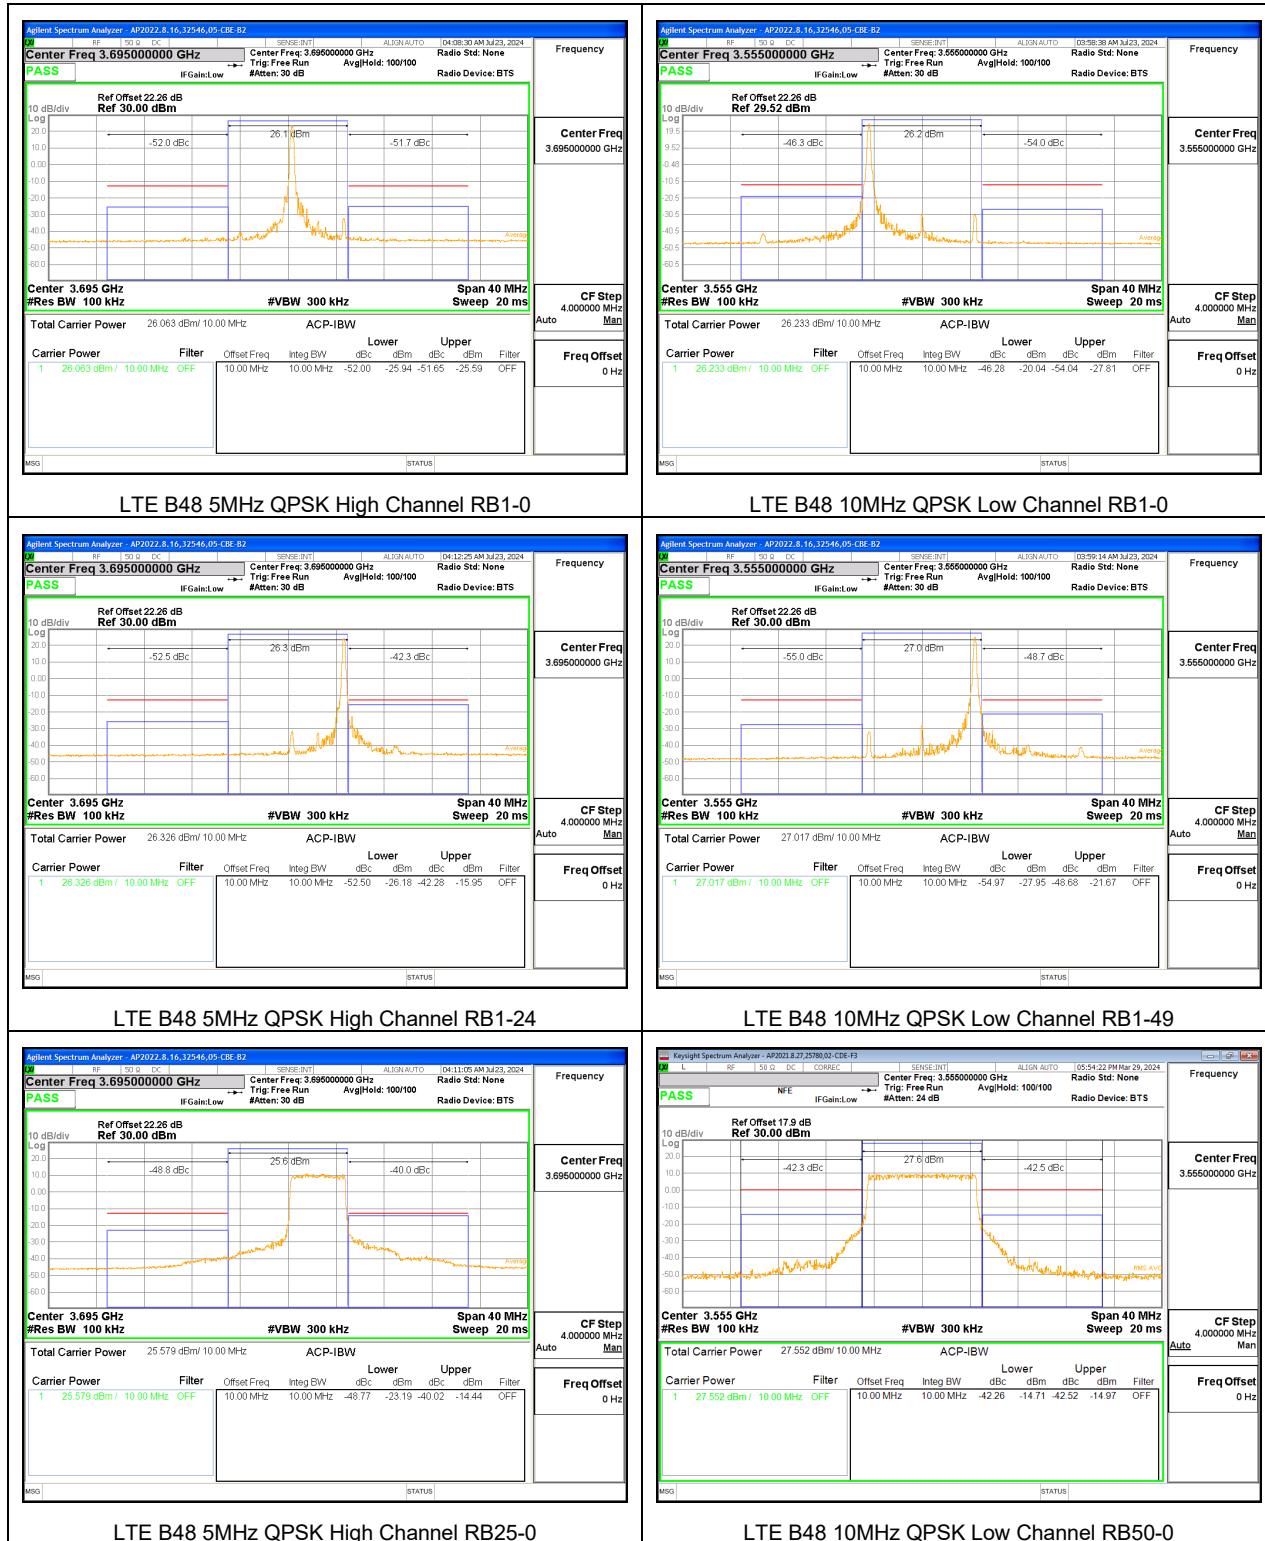

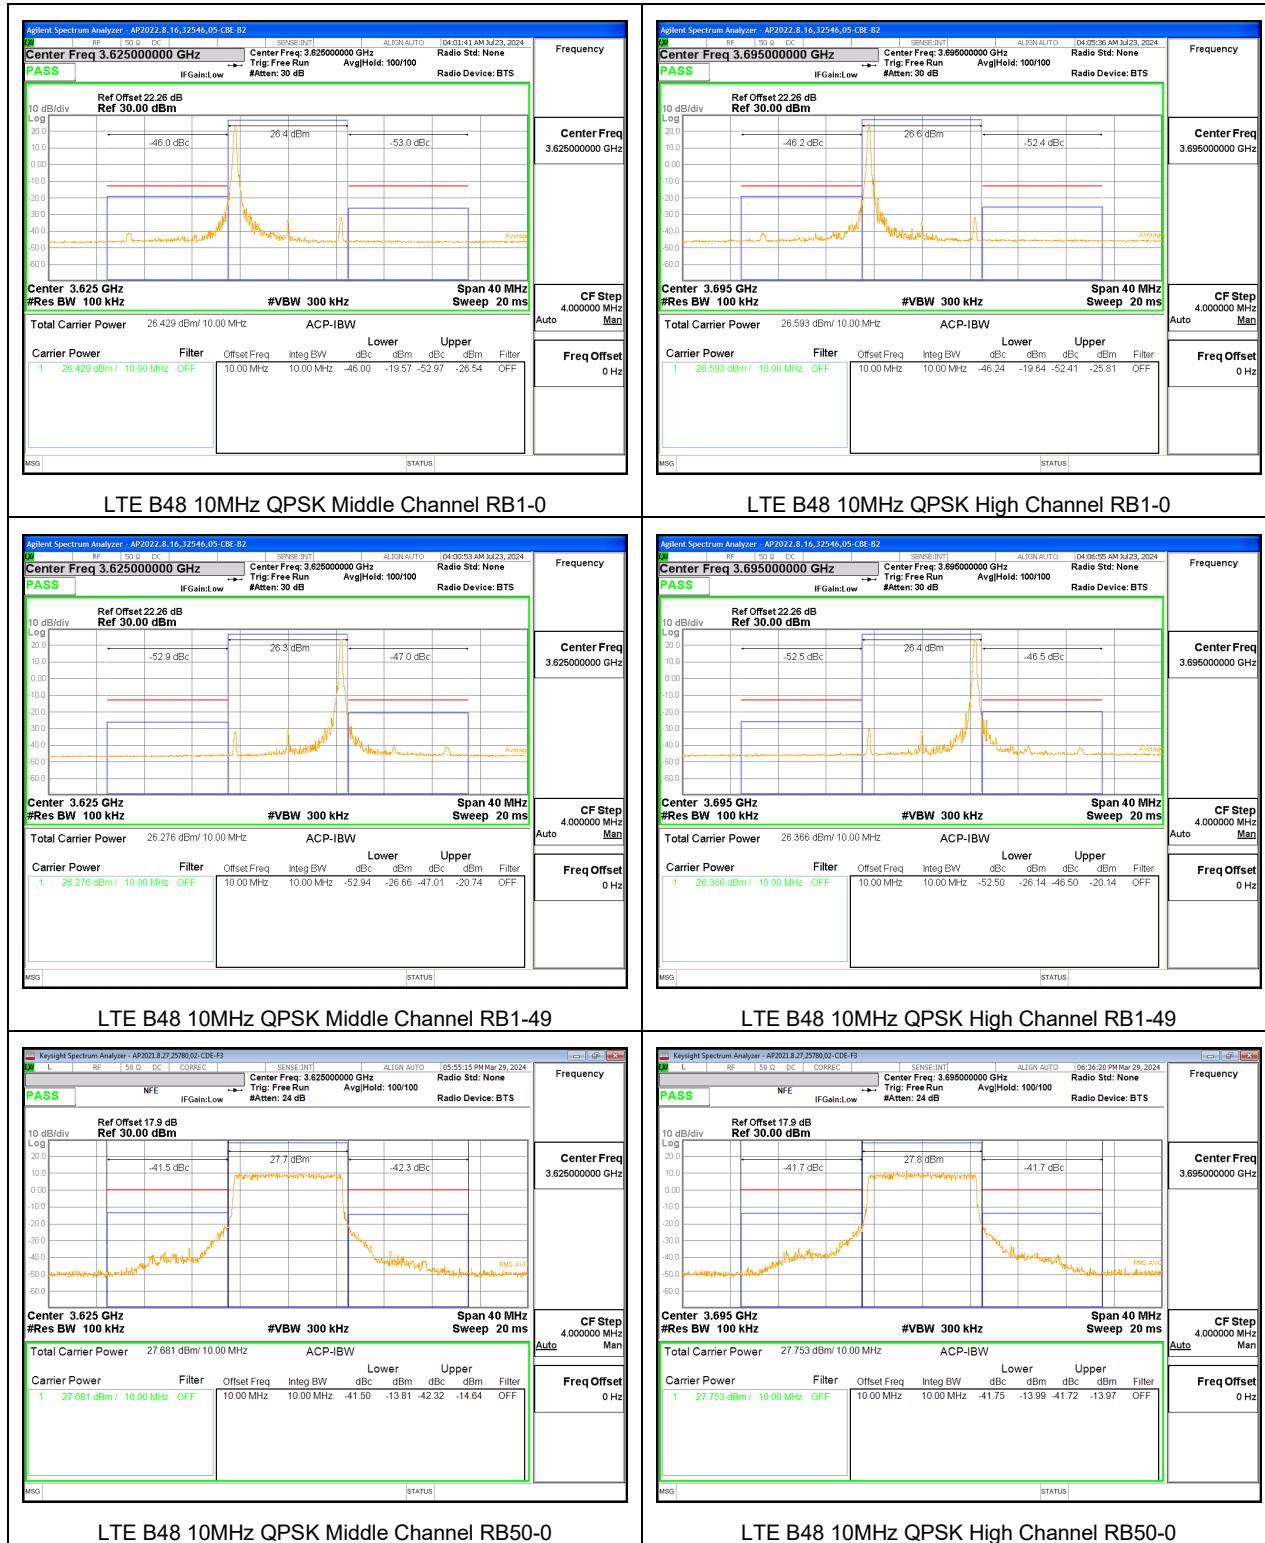

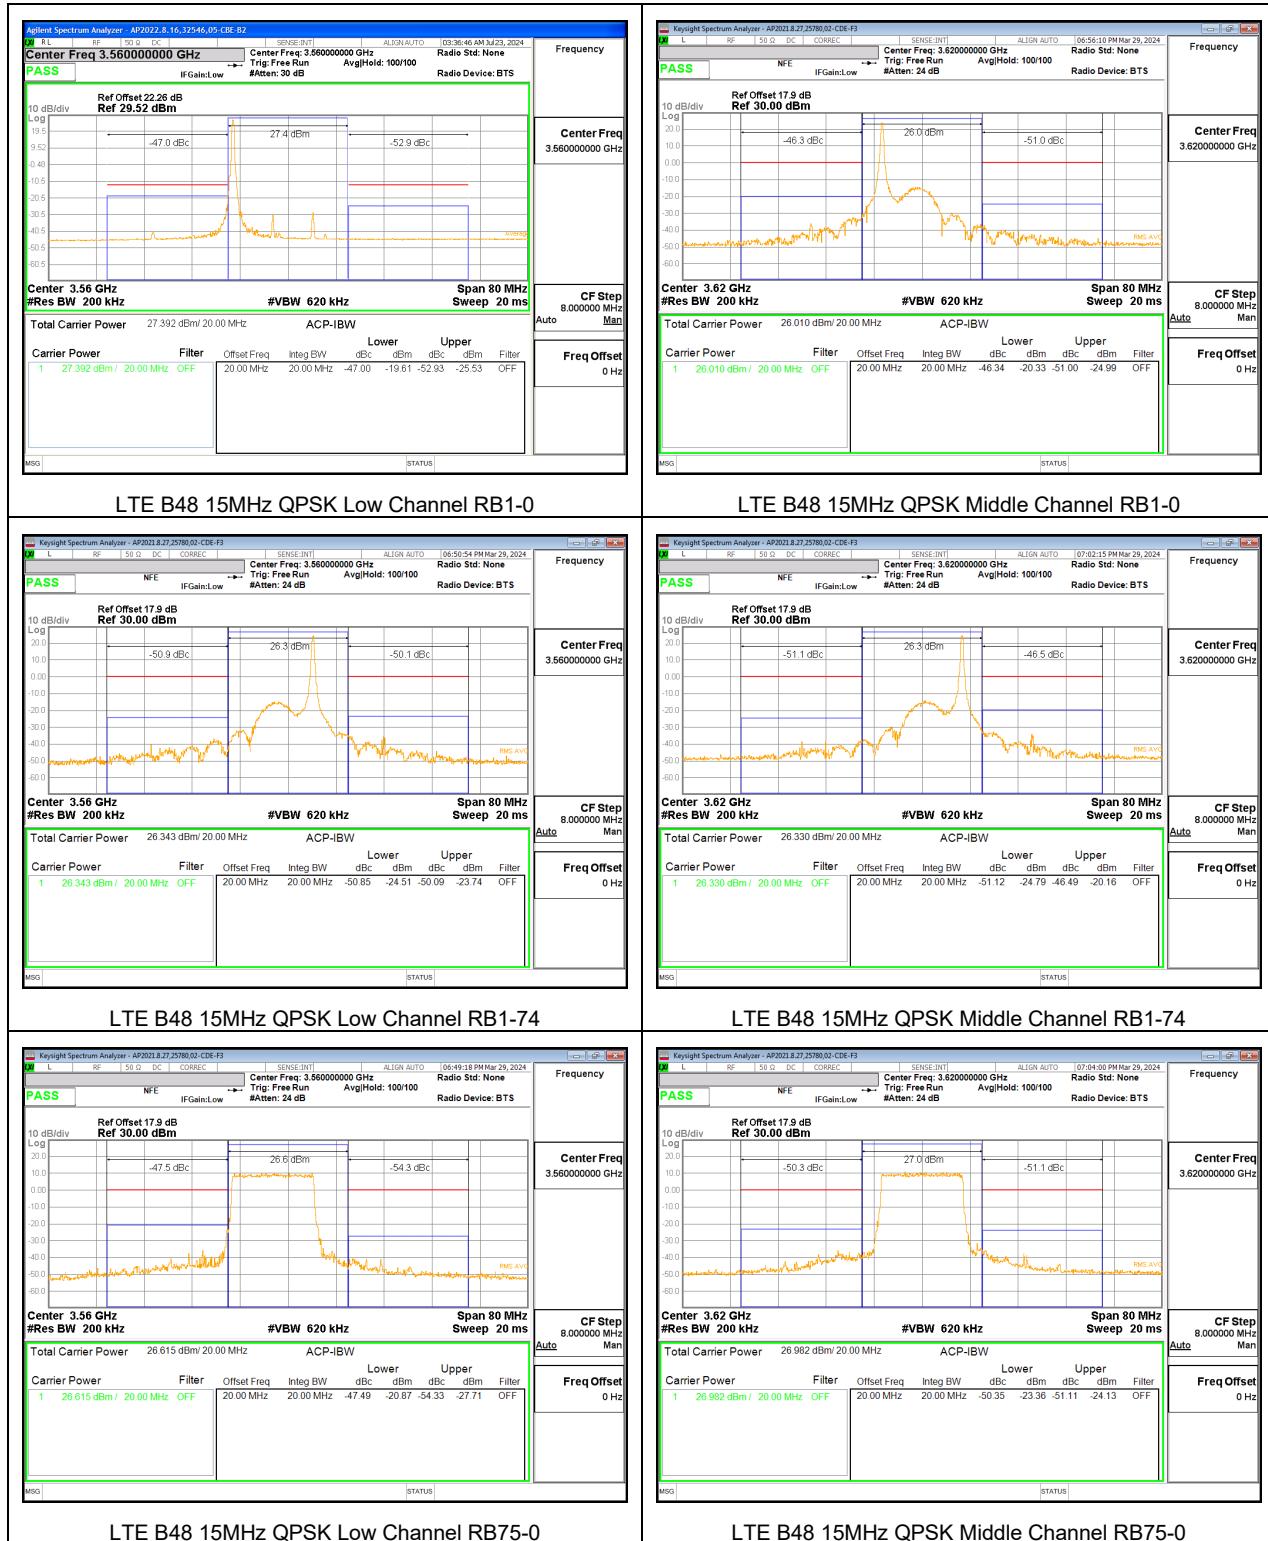



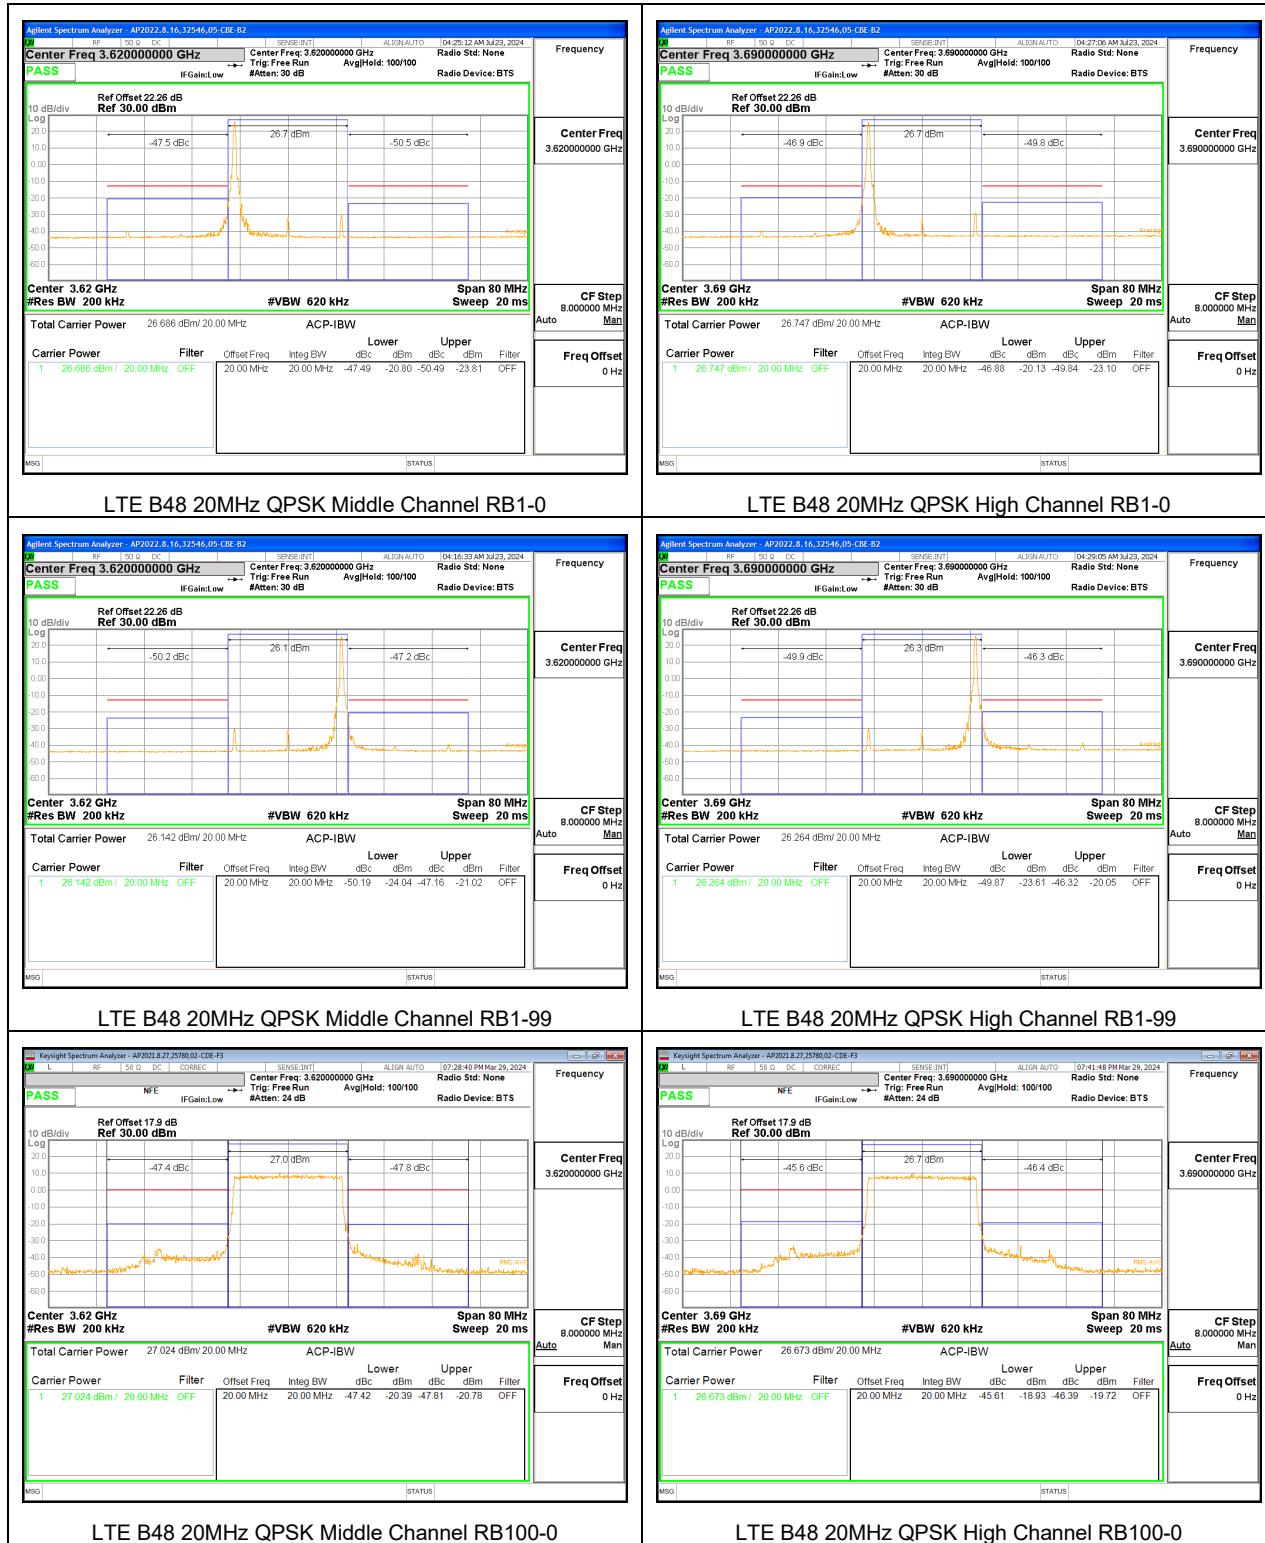

5G NR n48 EMISSION MASK

