


VERTICAL RESULT

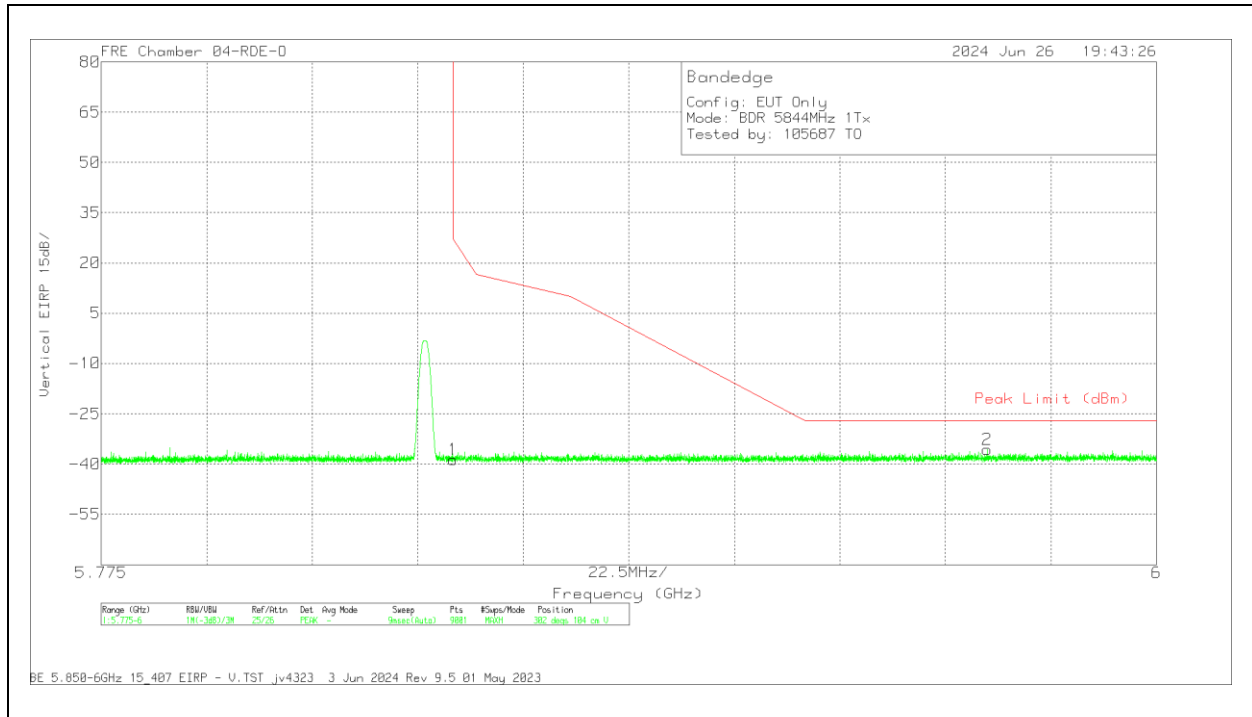


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.09	Pk	35.4	11.8	-33.8	-38.69	27	-65.69	302	104	V
2	5.96395	-49.49	Pk	35.6	11.8	-33.61	-35.7	-27	-8.7	302	104	V

Pk - Peak detector

ANT 6 + ANT 5, MIMO TXBF MODE

LOW CHANNEL, 5733MHz


HORIZONTAL RESULT

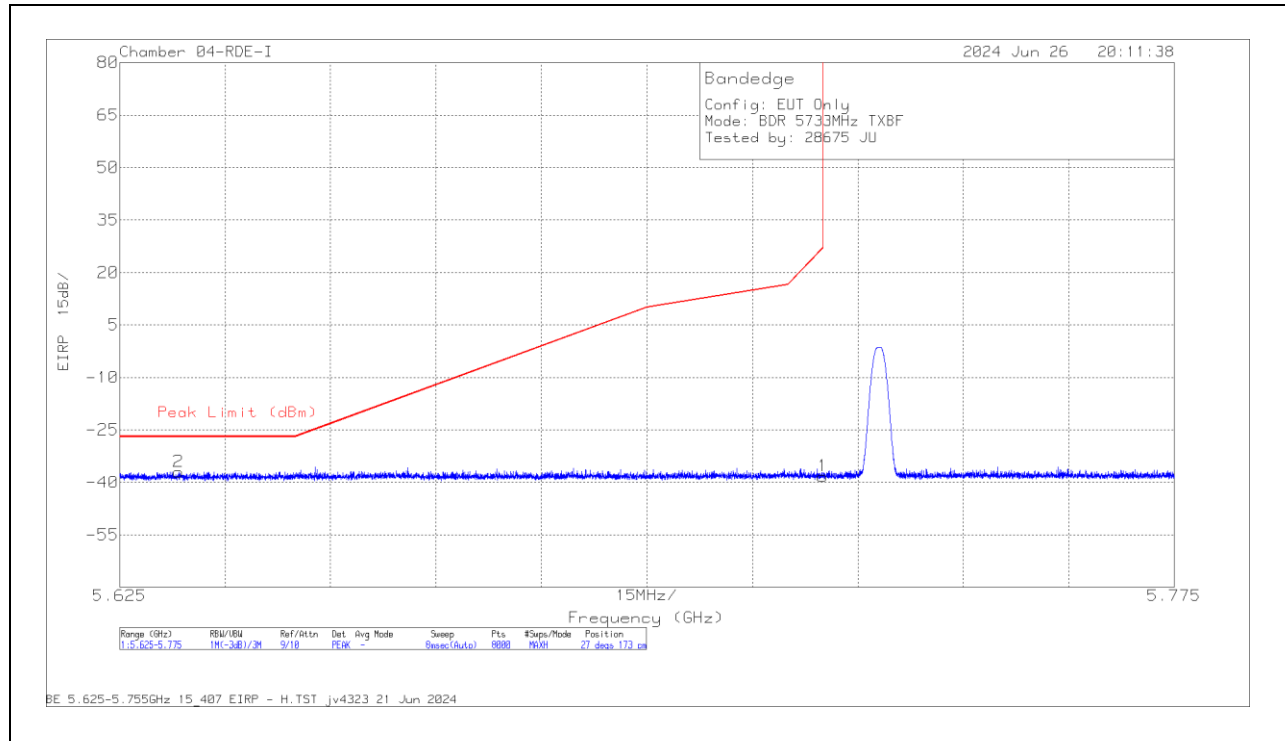

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.633382	-66.98	Pk	34.9	-16.7	11.8	-36.98	-27	-9.98	27	173	H
1	5.725	-68.33	PK	34.9	-16.6	11.8	-38.23	27	-65.23	27	173	H

Pk - Peak detector

VERTICAL RESULT

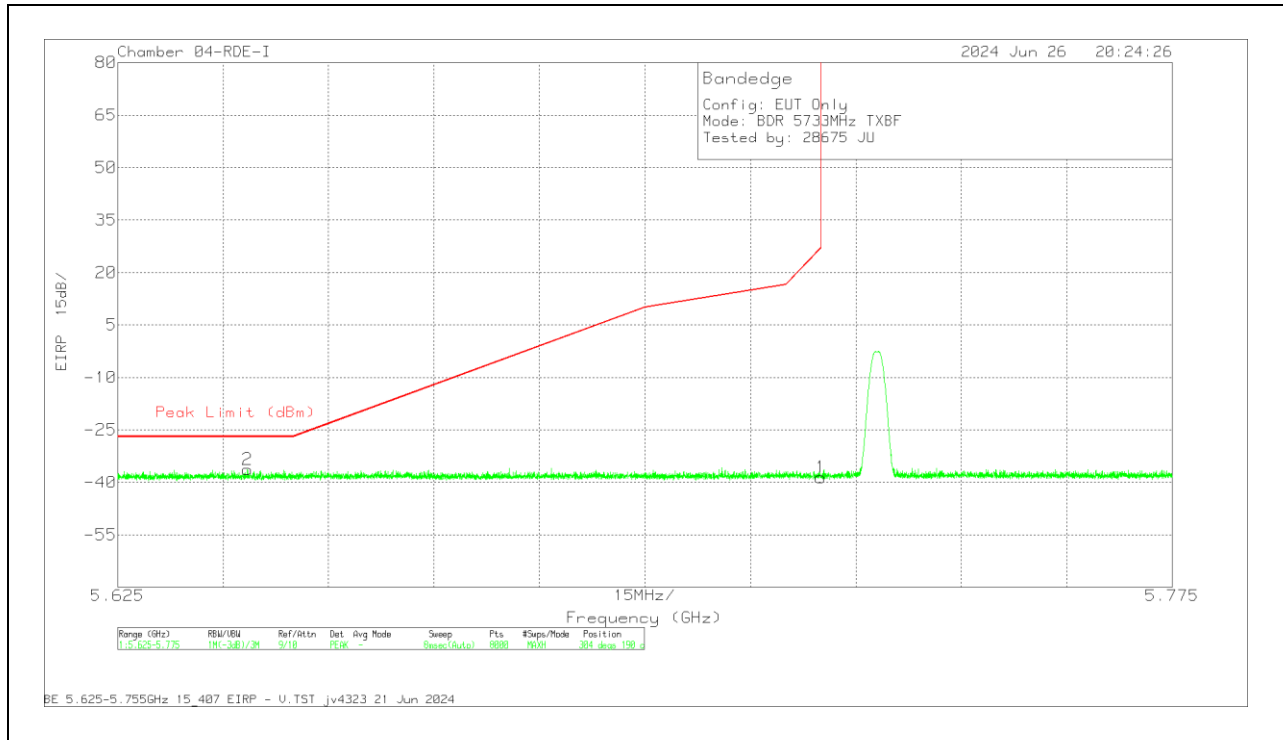


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.643471	-66.36	Pk	34.9	-16.7	11.8	-36.36	-27	-9.36	304	190	V
1	5.725	-68.67	Pk	34.9	-16.6	11.8	-38.57	27	-65.57	304	190	V

Pk - Peak detector

HIGH CHANNEL, 5844MHz


HORIZONTAL RESULT

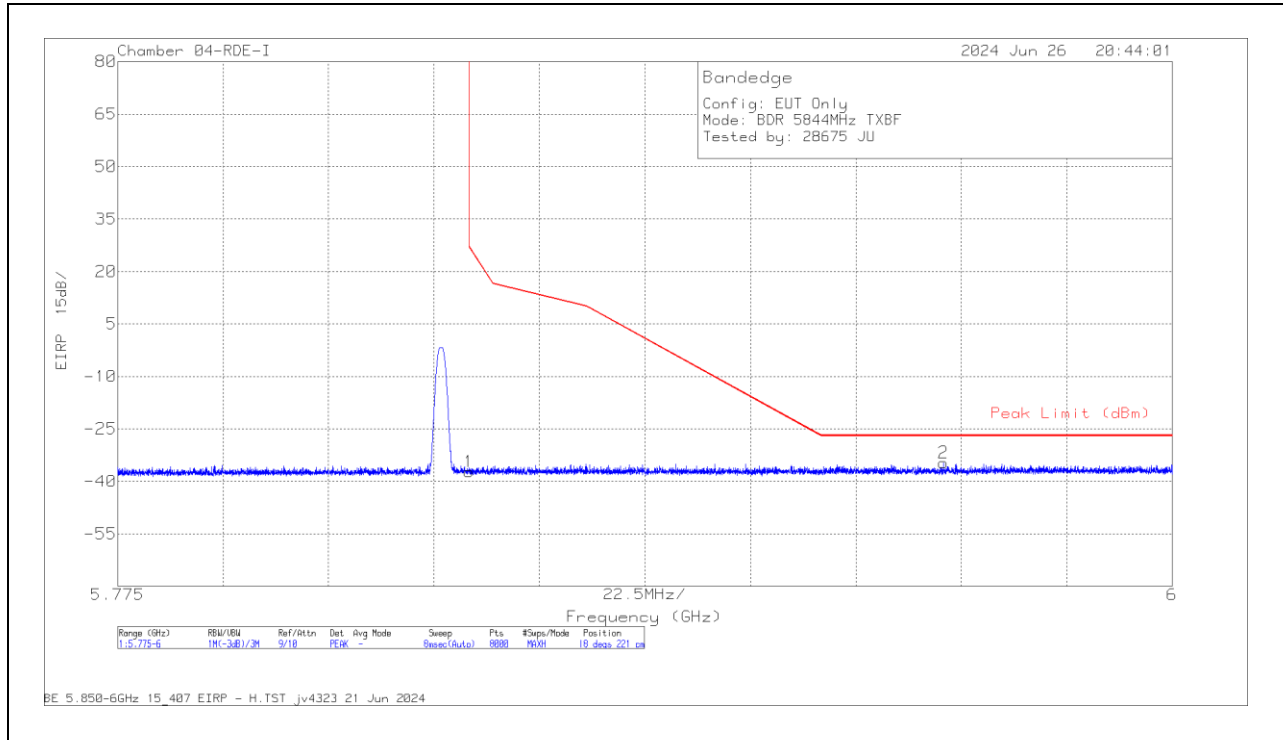

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.56	Pk	35	-15.5	11.8	-37.26	27	-64.26	18	221	H
2	5.9512	-66.34	Pk	35.3	-15.5	11.8	-34.74	-27	-7.74	18	221	H

Pk - Peak detector

VERTICAL RESULT

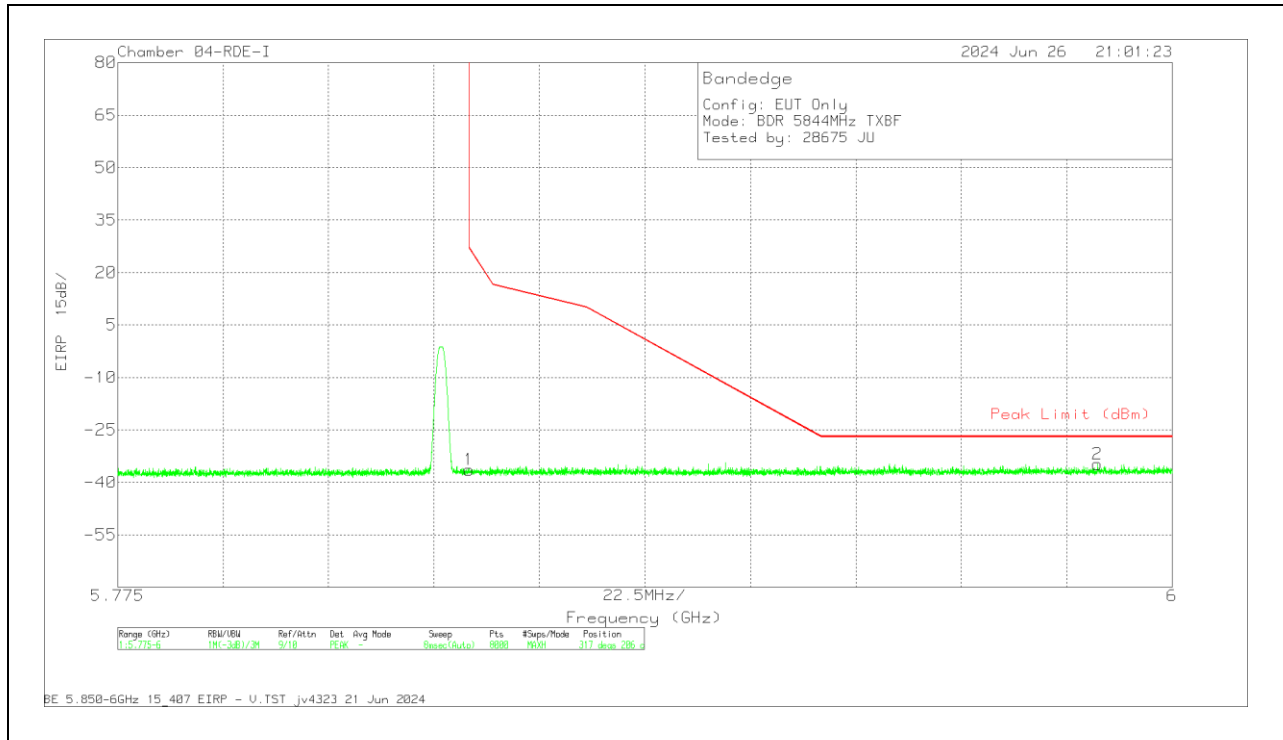


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.69	Pk	35	-15.5	11.8	-36.39	27	-63.39	317	206	V
2	5.984083	-66.27	Pk	35.4	-15.7	11.8	-34.77	-27	-7.77	317	206	V


Pk - Peak detector

10.1.16. BDR LOW POWER, UNII-3 BAND, MIMO TXBF MODE, HARMONIC AND SPURIOUS

LOW CHANNEL, 5733MHZ

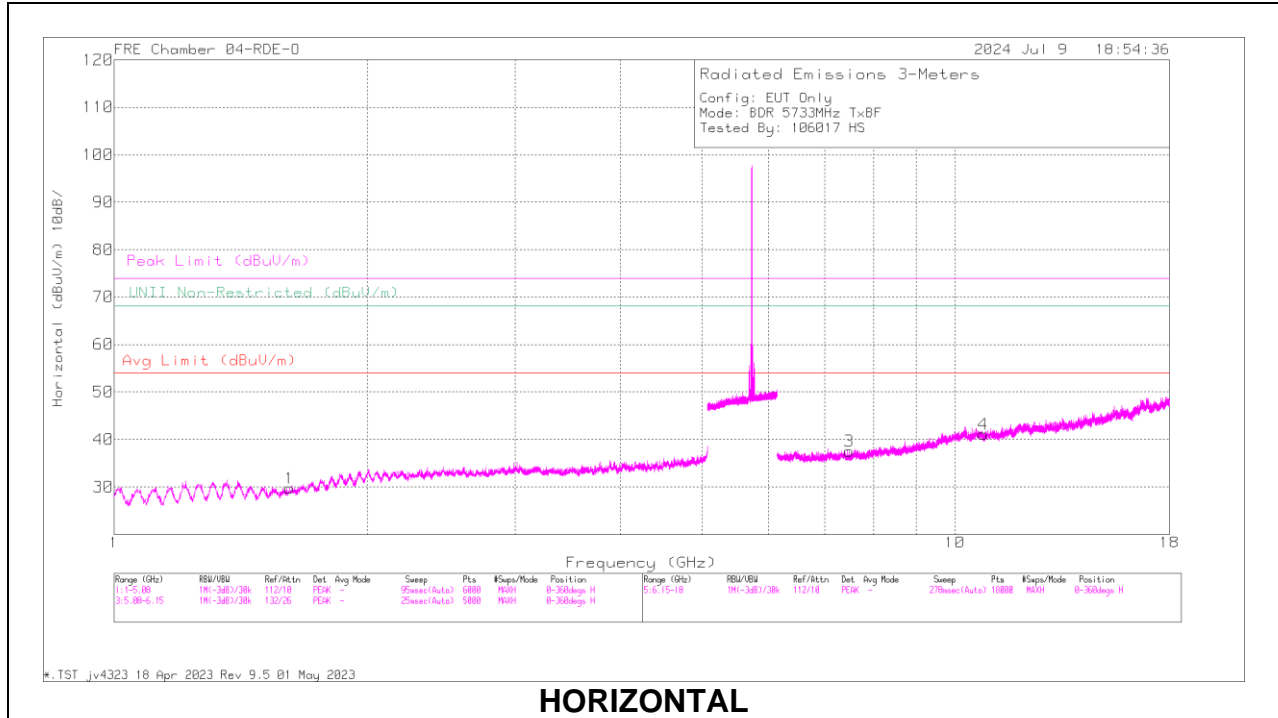

HORIZONTAL

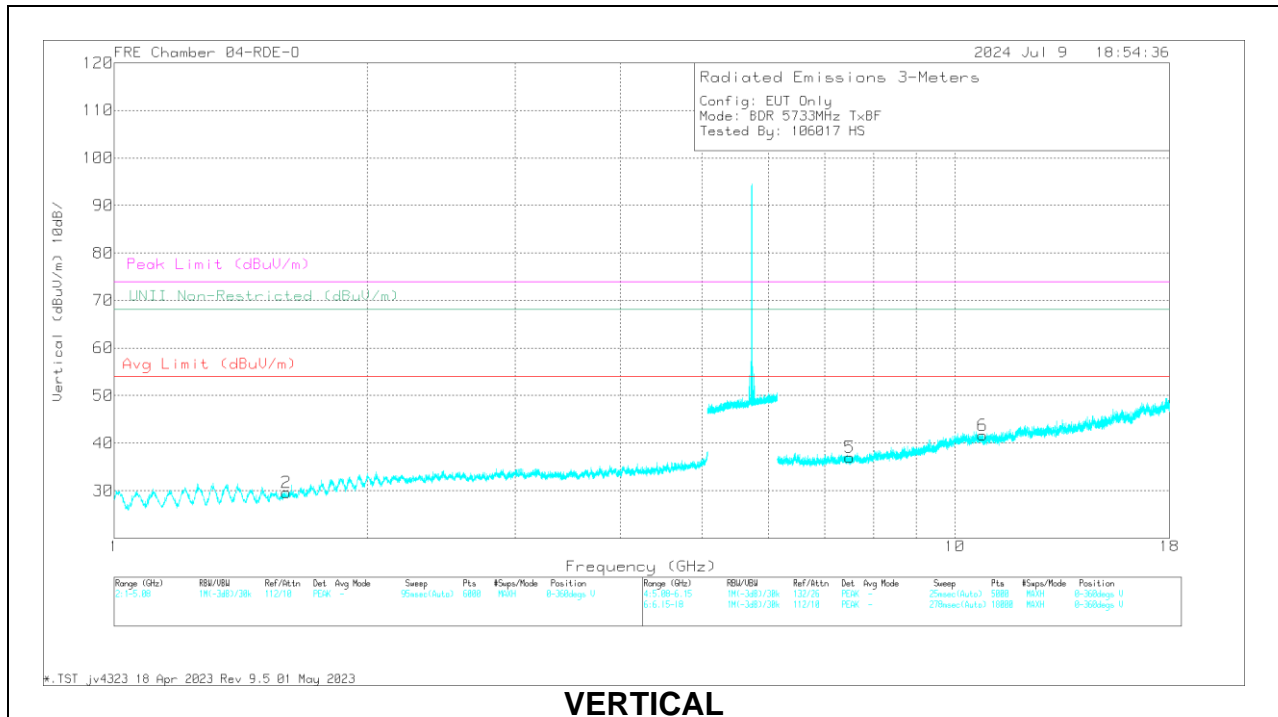


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.612598	57.17	PK-U	28.7	-46.46	0	39.41	-	-	74	-34.59	183	292	H
	* 1.611925	45.52	ADR	28.7	-46.4	0	27.82	54	-26.18	-	-	183	292	H
2	* 1.601717	57.08	PK-U	28.6	-46.43	0	39.25	-	-	74	-34.75	292	260	V
	* 1.600308	45.91	ADR	28.6	-46.5	0	28.01	54	-25.99	-	-	292	260	V
3	* 7.478283	52.97	PK-U	35.8	-42	0	46.77	-	-	74	-27.23	132	342	H
	* 7.477625	41.3	ADR	35.8	-42	0	35.1	54	-18.9	-	-	132	342	H
4	* 10.816387	52.65	PK-U	38.4	-40.34	0	50.71	-	-	74	-23.29	330	177	H
	* 10.817321	41.08	ADR	38.4	-40.37	0	39.11	54	-14.89	-	-	330	177	H
5	* 7.50109	53.92	PK-U	35.8	-42.2	0	47.52	-	-	74	-26.48	309	192	V
	* 7.501557	41.42	ADR	35.8	-42.2	0	35.02	54	-18.98	-	-	309	192	V
6	* 10.789573	52.39	PK-U	38.5	-40.14	0	50.75	-	-	74	-23.25	84	317	V
	* 10.790405	40.75	ADR	38.5	-40.14	0	39.11	54	-14.89	-	-	84	317	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL, 5788MHz

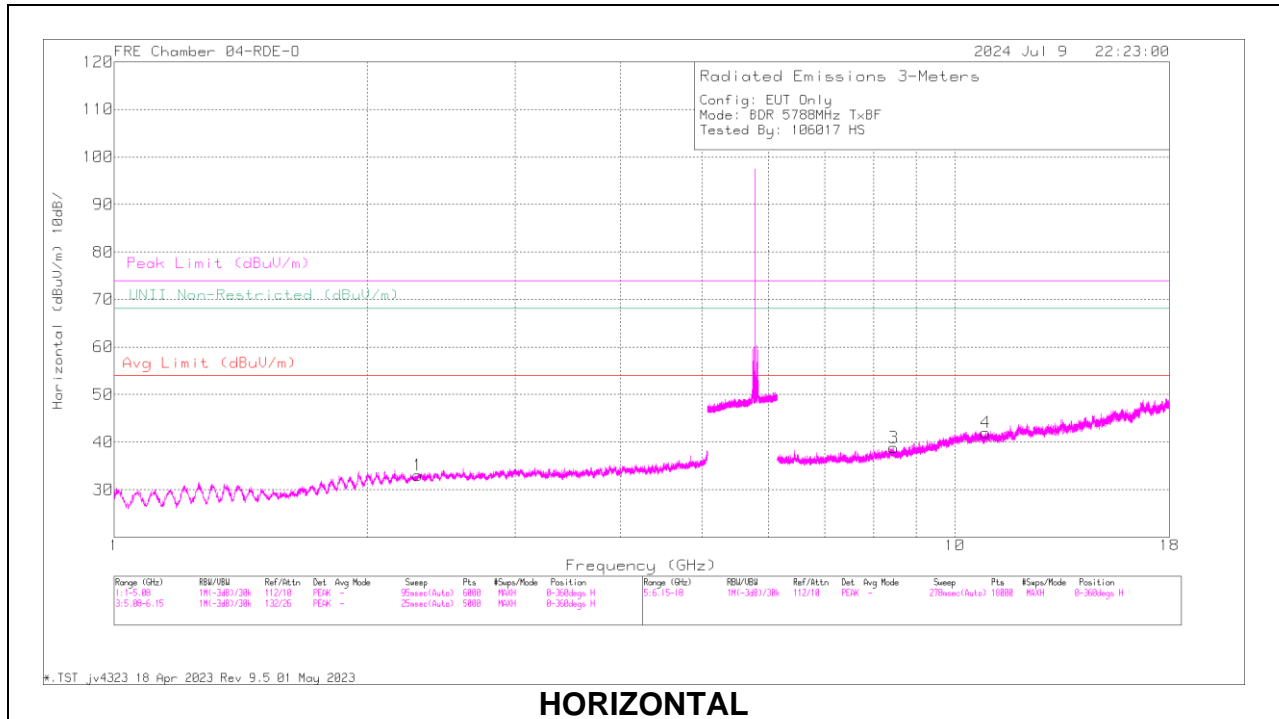

HORIZONTAL

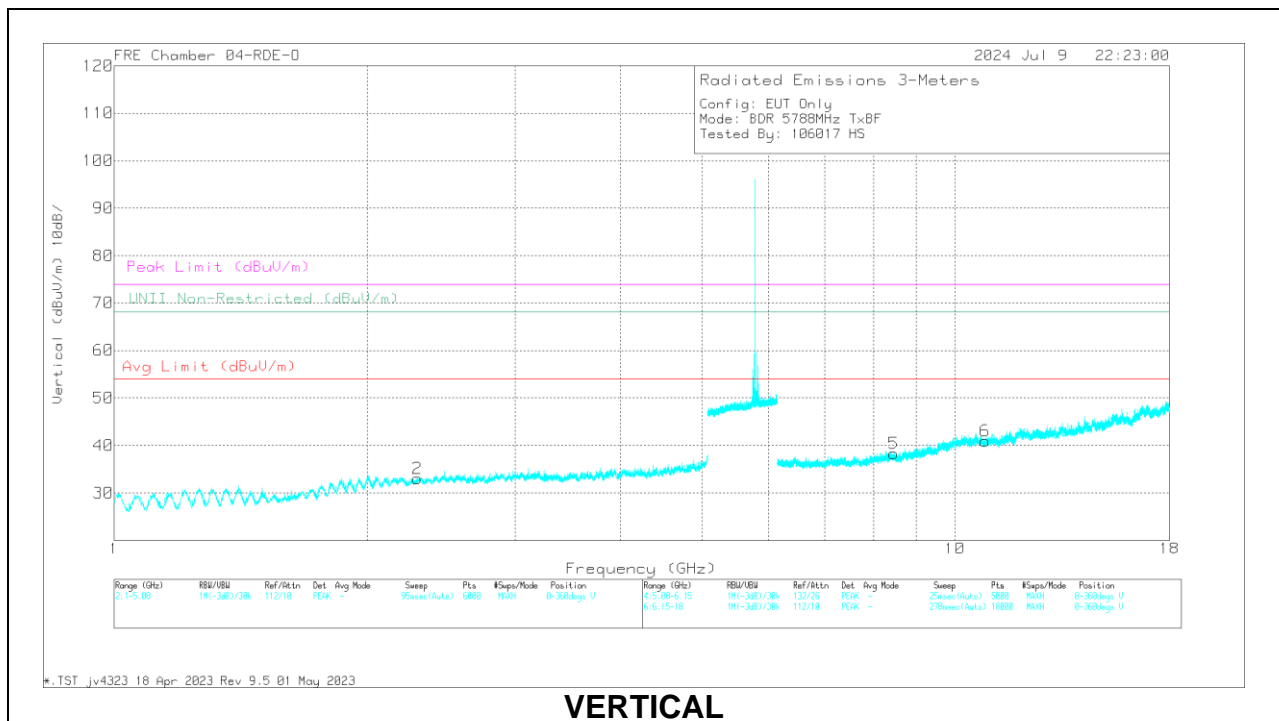


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.274692	57.49	PK-U	32.3	-47	0	42.79	-	-	74	-31.21	47	305	H
	* 2.262592	45.98	ADR	32.2	-46.8	0	31.38	54	-22.62	-	-	47	305	H
2	* 2.292016	57.9	PK-U	32.3	-46.9	0	43.3	-	-	74	-30.7	190	156	V
	* 2.293763	46	ADR	32.3	-46.8	0	31.5	54	-22.5	-	-	190	156	V
3	* 8.460236	52.99	PK-U	36.1	-40.42	0	48.67	-	-	74	-25.33	190	257	H
	* 8.459241	40.91	ADR	36.1	-40.48	0	36.53	54	-17.47	-	-	190	257	H
4	* 10.888236	51.85	PK-U	38.5	-39.48	0	50.87	-	-	74	-23.13	201	238	H
	* 10.888226	40.44	ADR	38.5	-39.48	0	39.46	54	-14.54	-	-	201	238	H
5	* 8.459094	52.39	PK-U	36.1	-40.49	0	48	-	-	74	-26	297	154	V
	* 8.459774	40.92	ADR	36.1	-40.42	0	36.6	54	-17.4	-	-	297	154	V
6	* 10.869761	52.31	PK-U	38.5	-40	0	50.81	-	-	74	-23.19	291	233	V
	* 10.868847	40.56	ADR	38.5	-40	0	39.06	54	-14.94	-	-	291	233	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL, 5844MHz

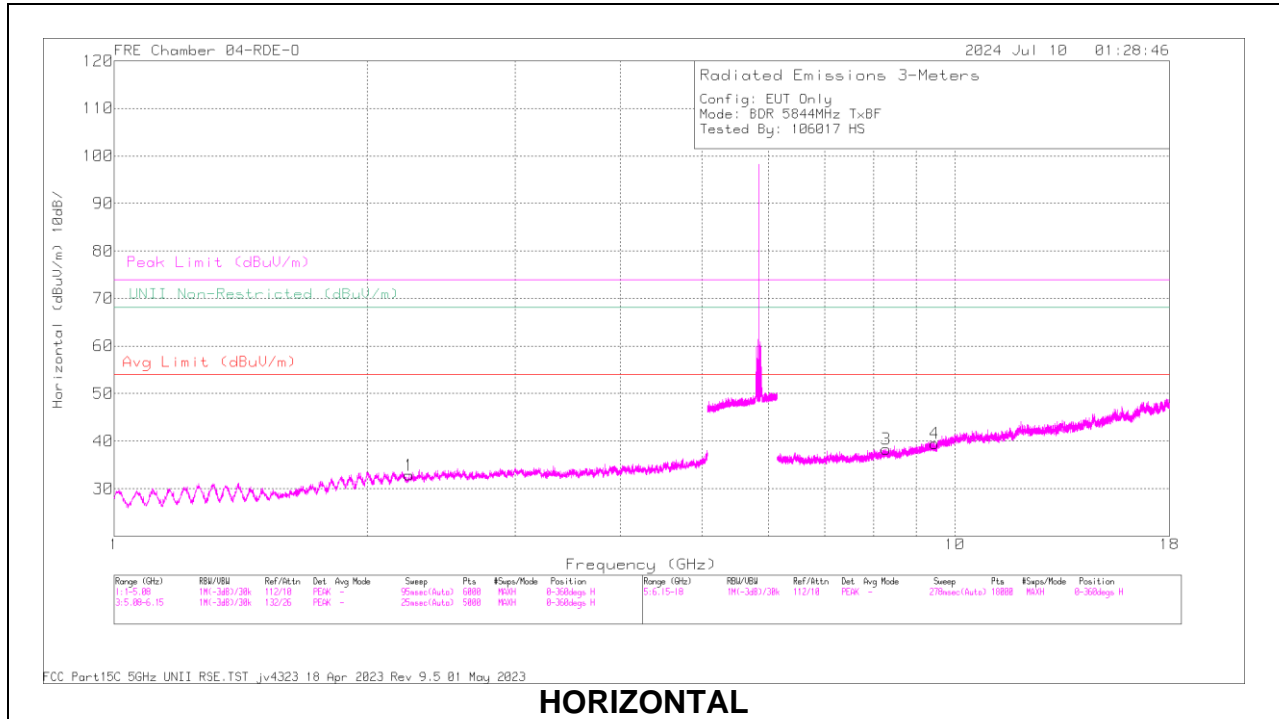

HORIZONTAL

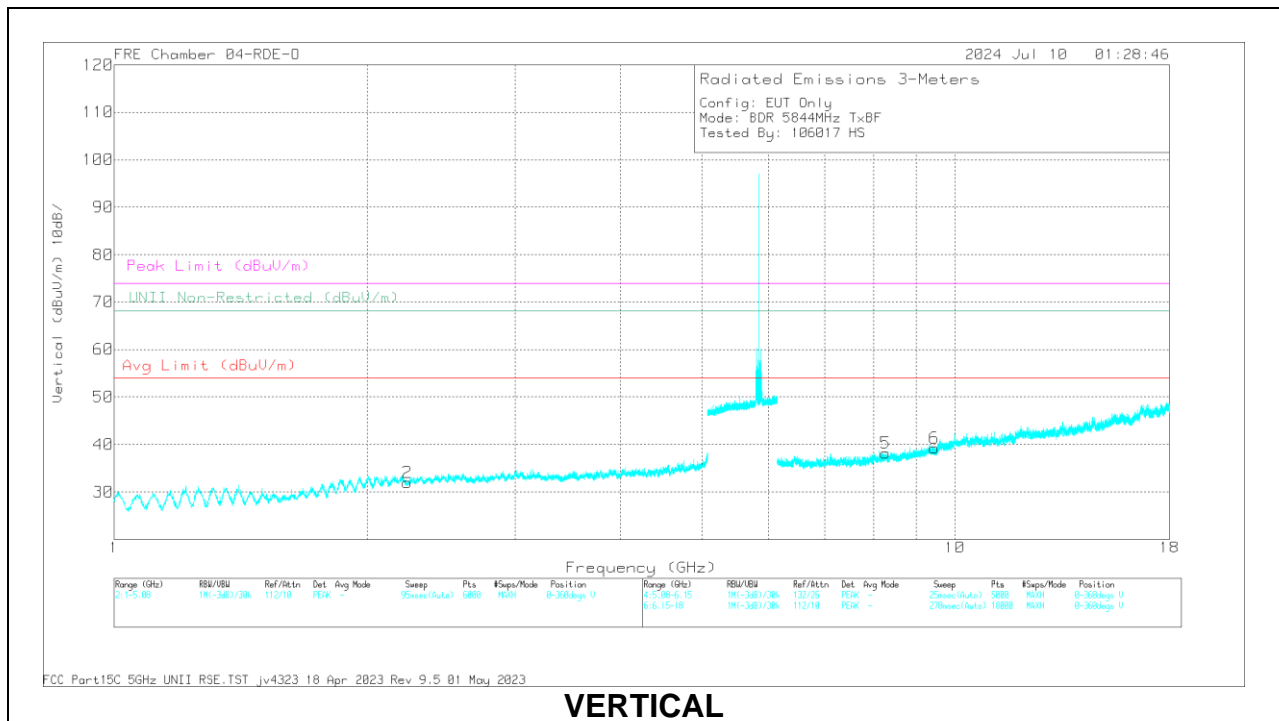

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.242014	56.86	PK-U	32.2	-46.8	0	42.26	-	-	74	-31.74	159	380	H
	* 2.242233	45.44	ADR	32.2	-46.8	0	30.84	54	-23.16	-	-	159	380	H
2	* 2.234315	57.03	PK-U	32.2	-46.8	0	42.43	-	-	74	-31.57	176	381	V
	* 2.23691	45.35	ADR	32.2	-46.8	0	30.75	54	-23.25	-	-	176	381	V
3	* 8.286973	52.34	PK-U	36.1	-40.4	0	48.04	-	-	74	-25.96	179	290	H
	* 8.28808	40.68	ADR	36.1	-40.71	0	36.07	54	-17.93	-	-	179	290	H
4	* 9.46218	53.3	PK-U	37.1	-41.38	0	49.02	-	-	74	-24.98	231	102	H
	* 9.461914	41.78	ADR	37.1	-41.39	0	37.49	54	-16.51	-	-	231	102	H
5	* 8.265509	52.68	PK-U	36.1	-41	0	47.78	-	-	74	-26.22	259	308	V
	* 8.266908	41	ADR	36.1	-40.91	0	36.19	54	-17.81	-	-	259	308	V
6	* 9.448585	54.17	PK-U	37	-41.54	0	49.63	-	-	74	-24.37	5	102	V
	* 9.448916	42.35	ADR	37	-41.51	0	37.84	54	-16.16	-	-	5	102	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

10.1.17. HDR4 HIGH POWER, UNII-3 BAND, BANDEDGE

ANT 6, SISO MODE

LOW CHANNEL, 5733MHz


HORIZONTAL RESULT

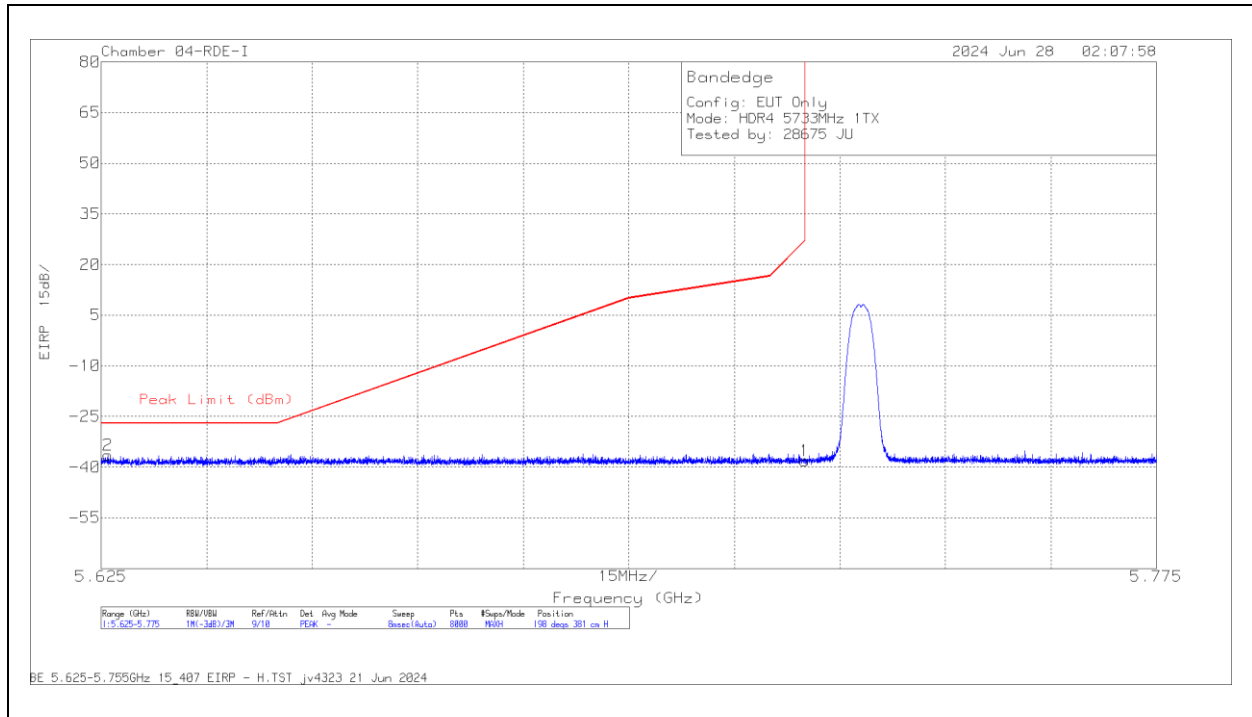

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.625938	-66.57	Pk	34.9	-16.6	11.8	-36.47	-27	-9.47	198	381	H
1	5.725	-68.18	Pk	34.9	-16.6	11.8	-38.08	27	-65.08	198	381	H

Pk - Peak detector

VERTICAL RESULT

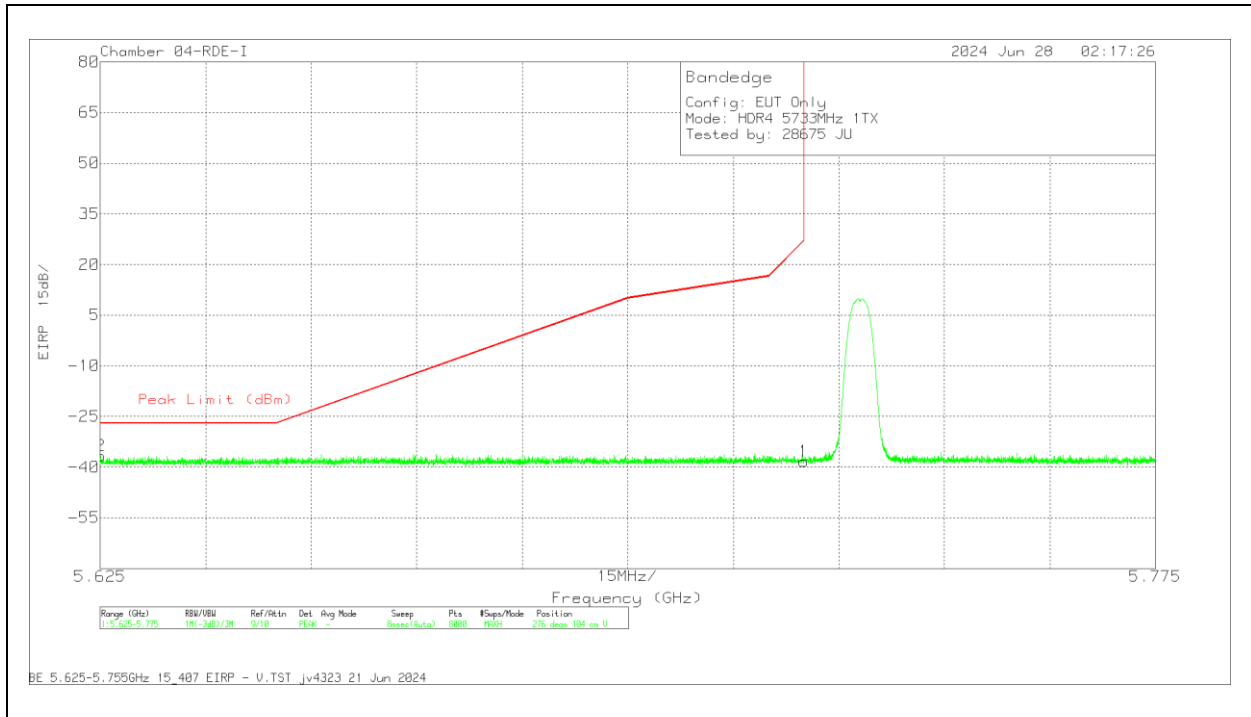


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.625038	-66.74	Pk	34.9	-16.6	11.8	-36.64	-27	-9.64	276	104	V
1	5.725	-68.43	Pk	34.9	-16.6	11.8	-38.33	27	-65.33	276	104	V

Pk - Peak detector

HIGH CHANNEL, 5844MHz


HORIZONTAL RESULT

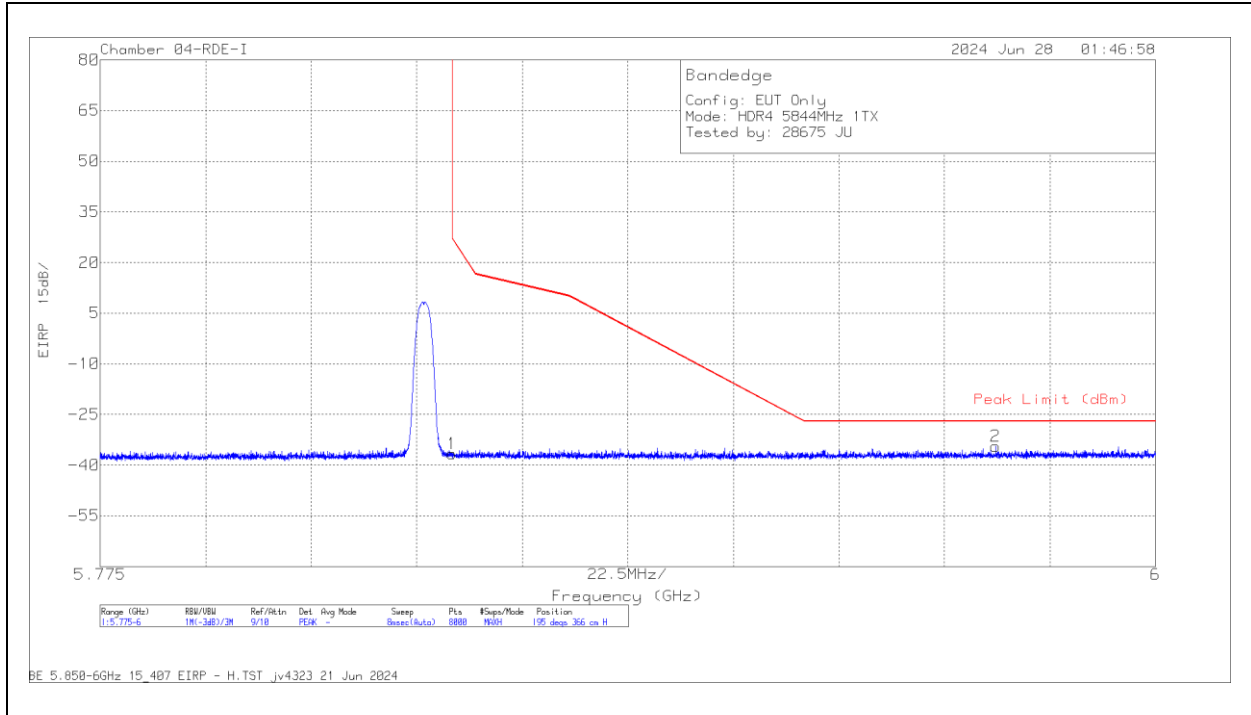

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.96	Pk	35	-15.5	11.8	-36.66	27	-63.66	195	366	H
2	5.965912	-65.93	Pk	35.3	-15.5	11.8	-34.33	-27	-7.33	195	366	H

Pk - Peak detector

VERTICAL RESULT

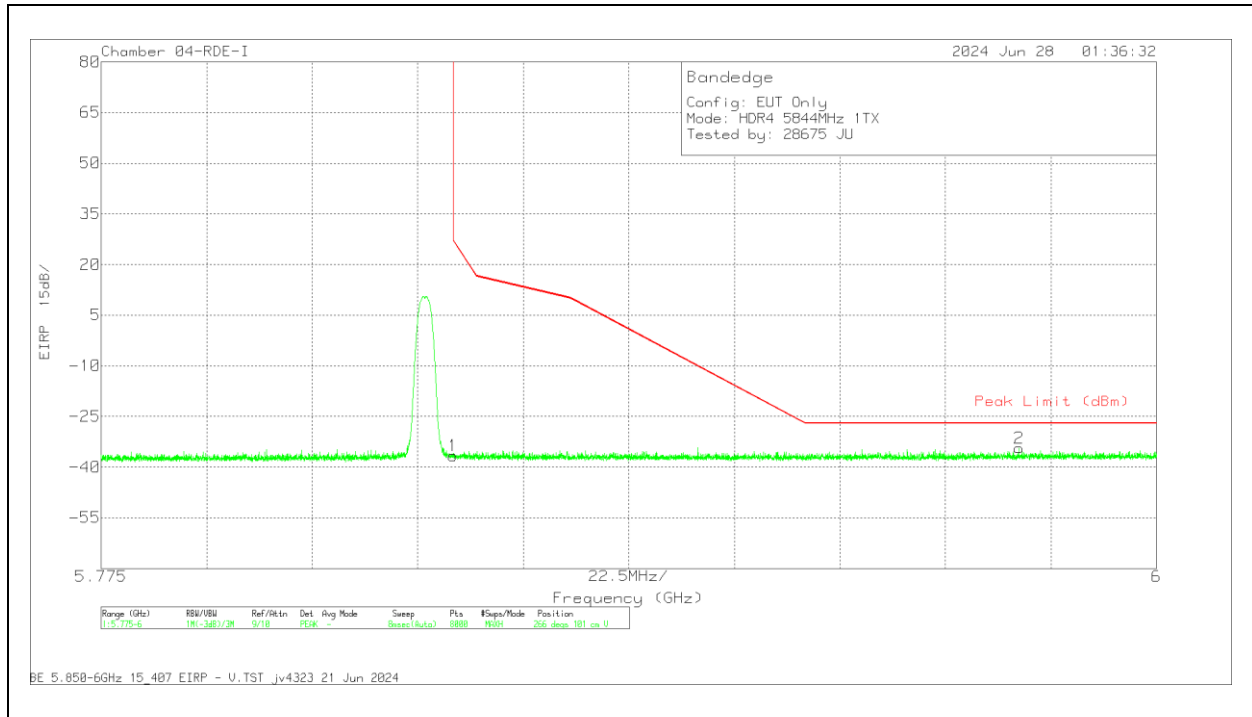


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.87	Pk	35	-15.5	11.8	-36.57	27	-63.57	266	101	V
2	5.970693	-65.82	Pk	35.3	-15.6	11.8	-34.32	-27	-7.32	266	101	V

Pk - Peak detector

ANT 5, SISO MODE

LOW CHANNEL, 5733MHz


HORIZONTAL RESULT

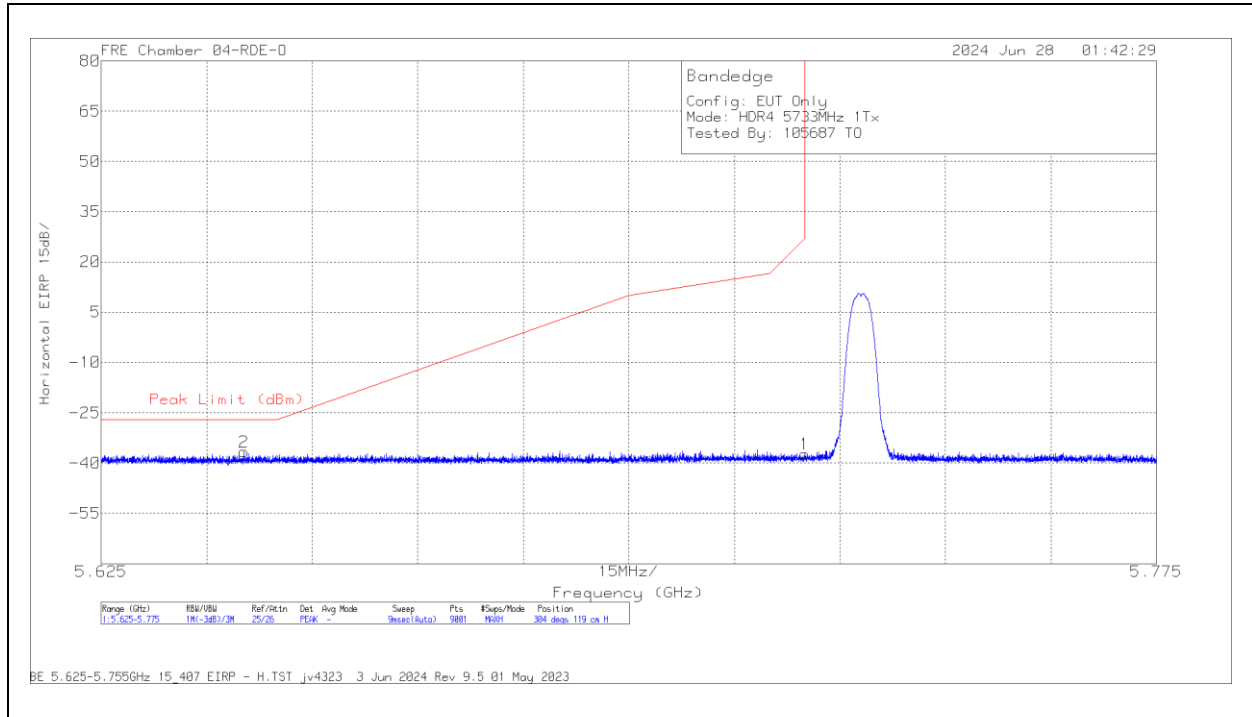

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.645317	-49.31	Pk	35.1	11.8	-34.27	-36.68	-27	-9.68	304	119	H
1	5.725	-50.15	Pk	35.2	11.8	-34.1	-37.25	27	-64.25	304	119	H

Pk - Peak detector

VERTICAL RESULT

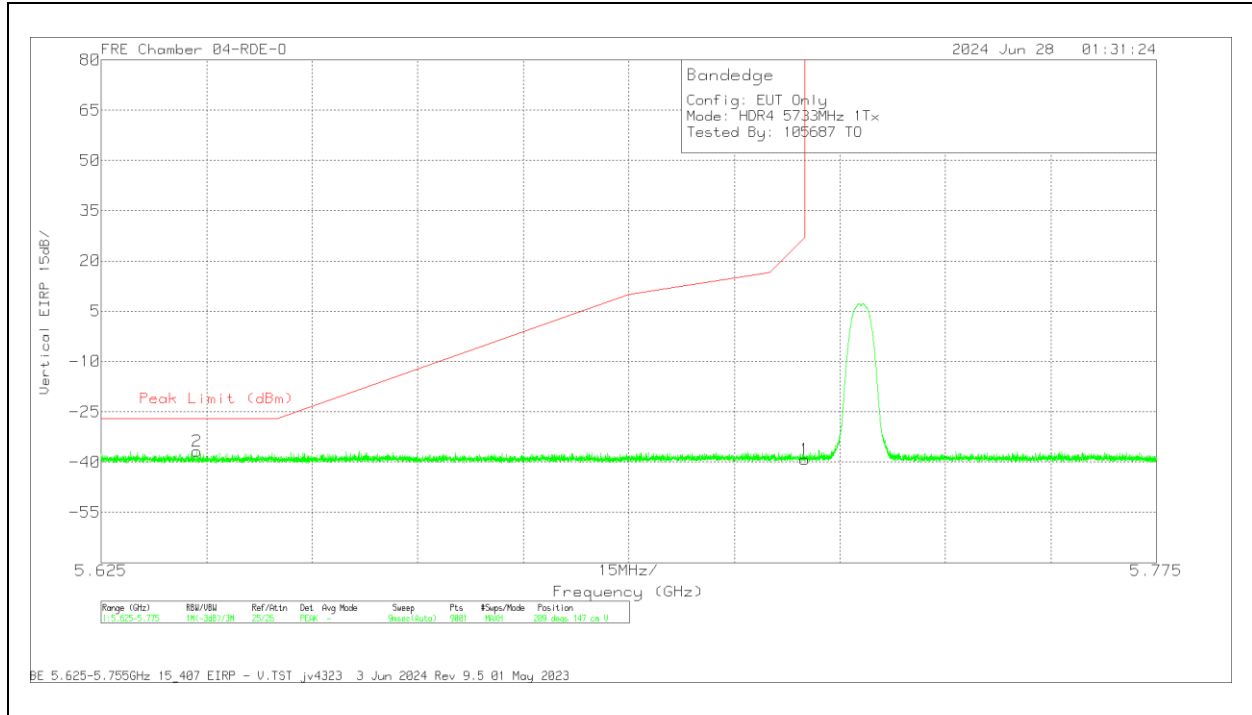


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.638584	-49.45	Pk	35.1	11.8	-34.26	-36.81	-27	-9.81	209	147	V
1	5.725	-52.14	Pk	35.2	11.8	-34.1	-39.24	27	-66.24	209	147	V

Pk - Peak detector

HIGH CHANNEL, 5844MHz


HORIZONTAL RESULT

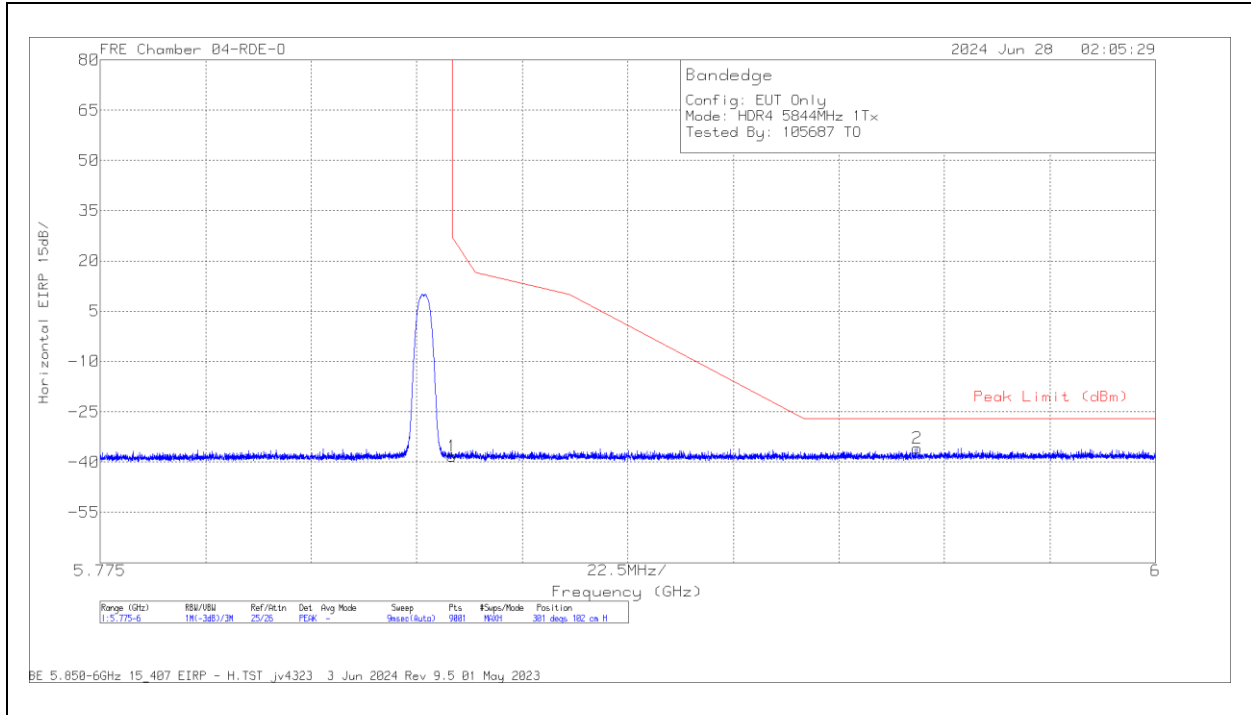

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-51.65	Pk	35.4	11.8	-33.8	-38.25	27	-65.25	301	102	H
2	5.949225	-49.56	Pk	35.6	11.8	-33.7	-35.86	-27	-8.86	301	102	H

Pk - Peak detector


VERTICAL RESULT

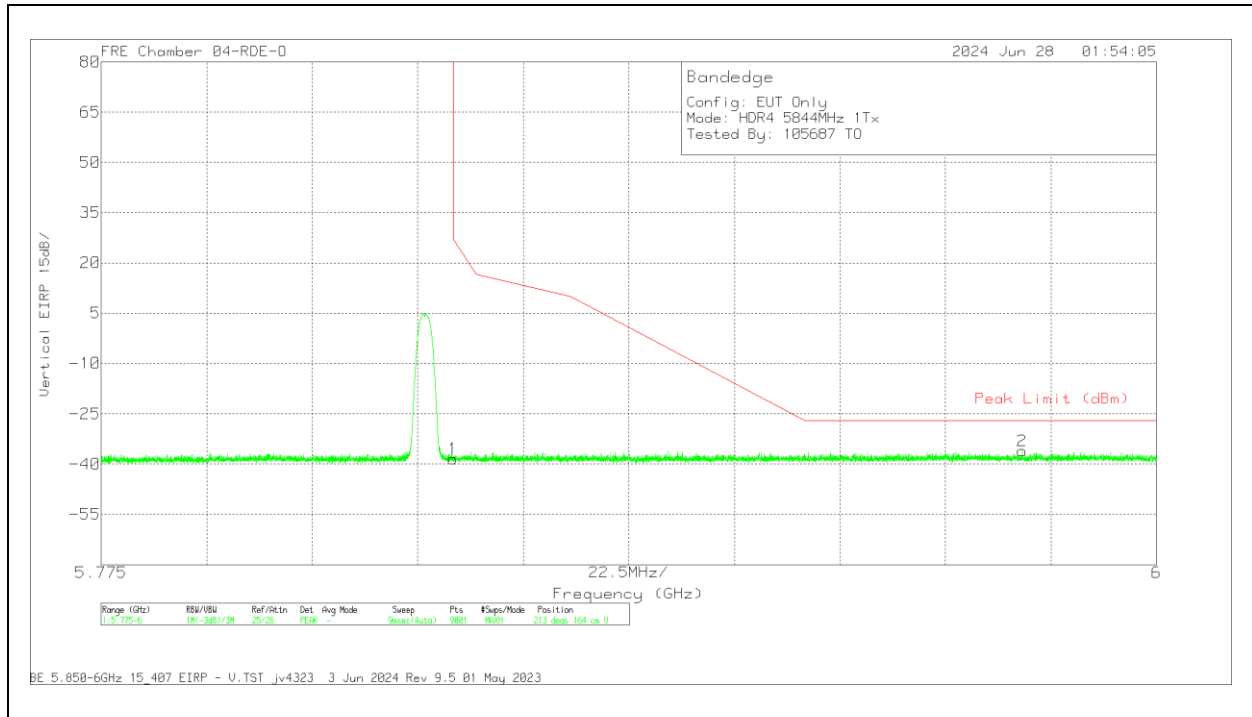

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-51.88	Pk	35.4	11.8	-33.8	-38.48	27	-65.48	213	164	V
2	5.971375	-49.76	Pk	35.6	11.8	-33.74	-36.1	-27	-9.1	213	164	V

Pk - Peak detector

VERTICAL RESULT

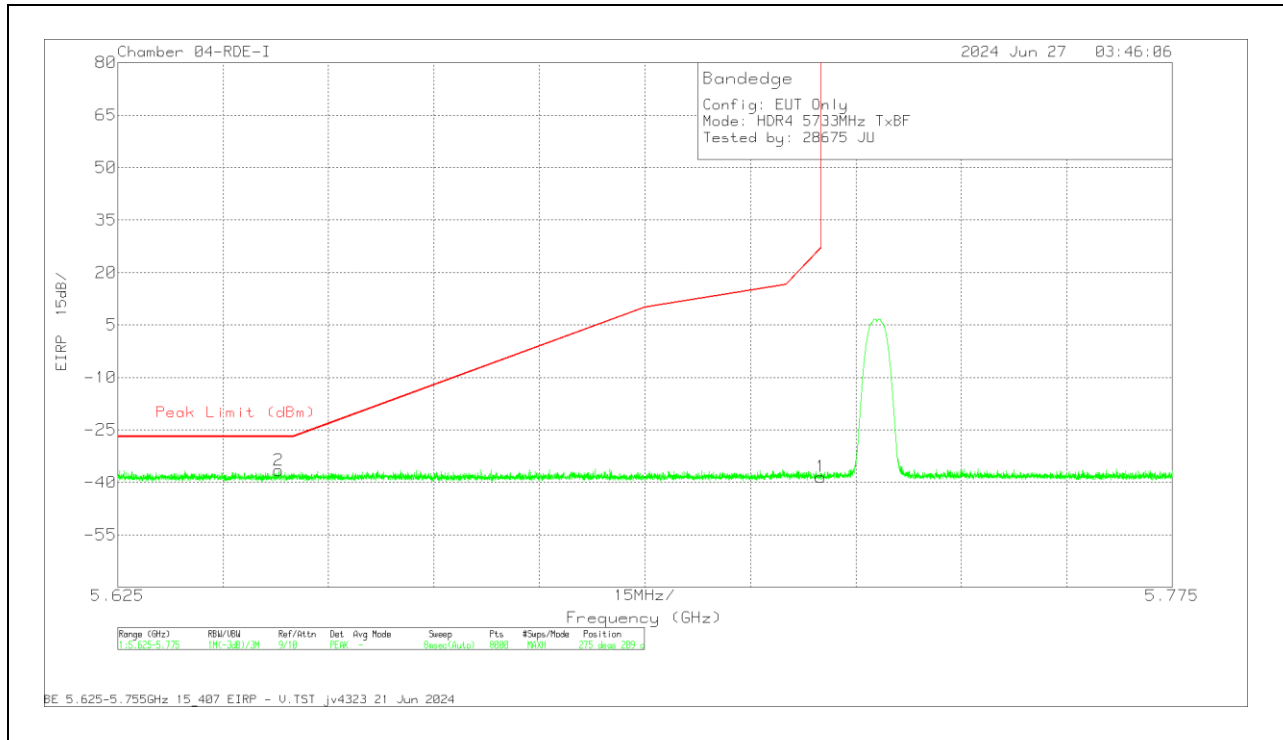


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647934	-66.71	Pk	34.9	-16.6	11.8	-36.61	-27	-9.61	275	209	V
1	5.725	-68.51	Pk	34.9	-16.6	11.8	-38.41	27	-65.41	275	209	V

Pk - Peak detector

HIGH CHANNEL, 5844MHz


HORIZONTAL RESULT

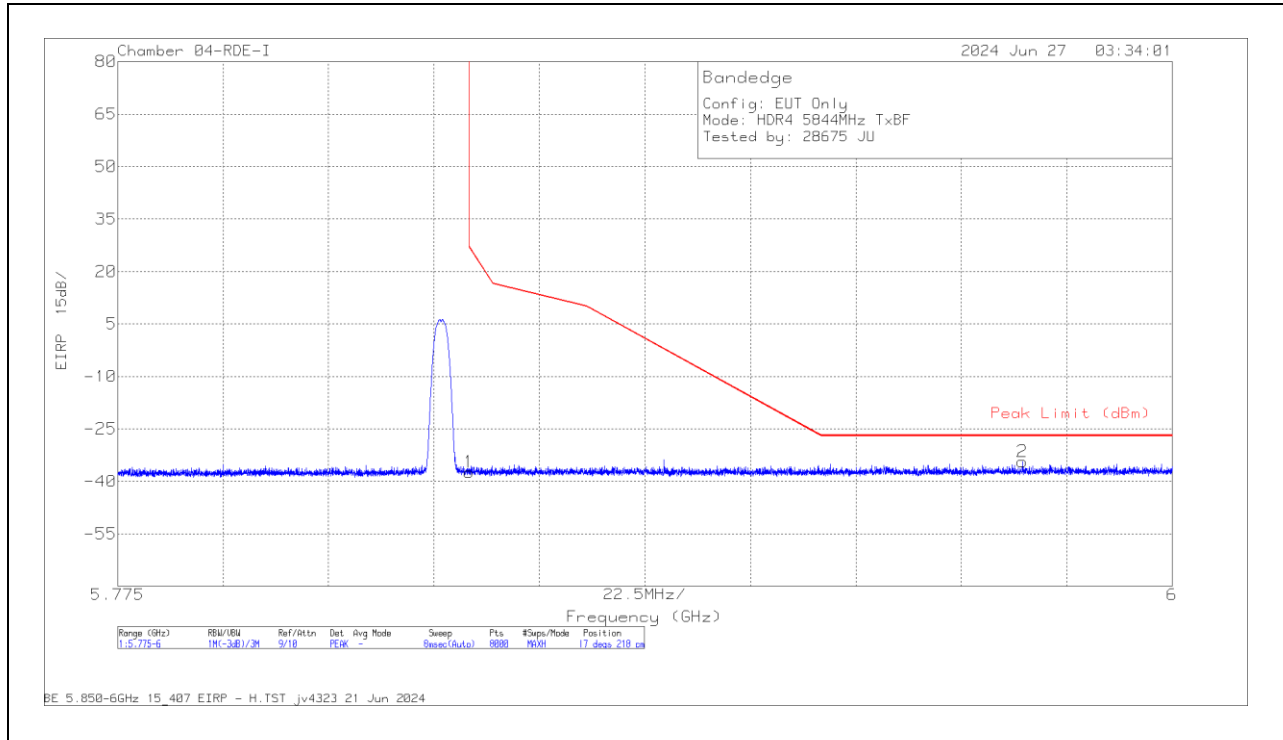

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.68	Pk	35	-15.5	11.8	-37.38	27	-64.38	17	218	H
2	5.968021	-65.98	Pk	35.3	-15.5	11.8	-34.38	-27	-7.38	17	218	H

Pk - Peak detector

VERTICAL RESULT


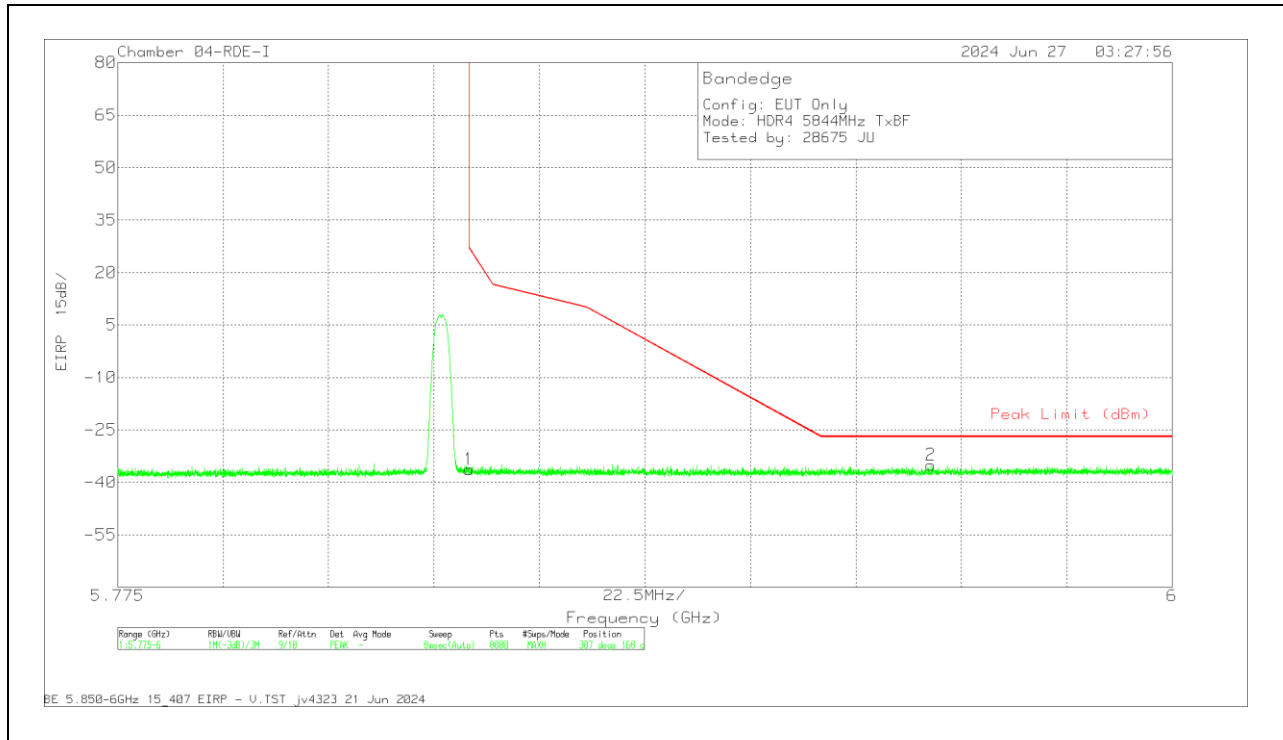


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.58	Pk	35	-15.5	11.8	-36.28	27	-63.28	307	168	V
2	5.948528	-66.63	Pk	35.3	-15.5	11.8	-35.03	-27	-8.03	307	168	V

Pk - Peak detector

10.1.18. HDR4 HIGH POWER, UNII-3 BAND, MIMO TXBF MODE, HARMONIC AND SPURIOUS

LOW CHANNEL 5733MHZ

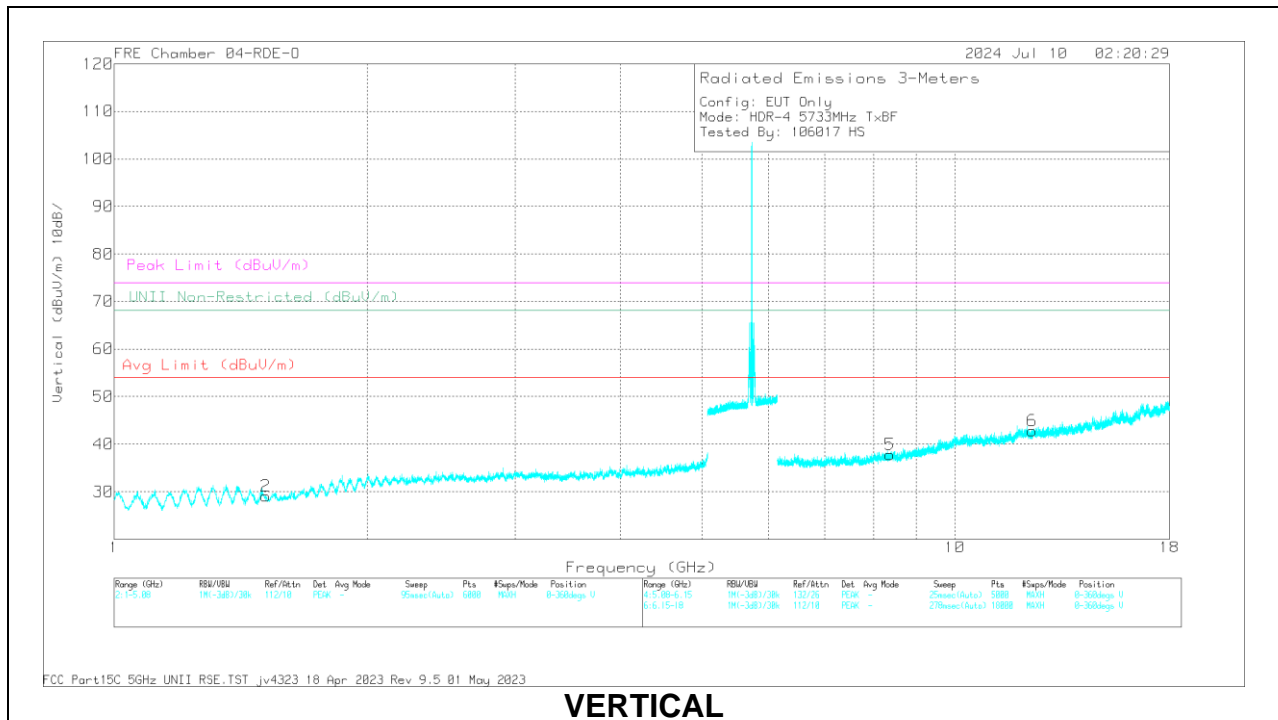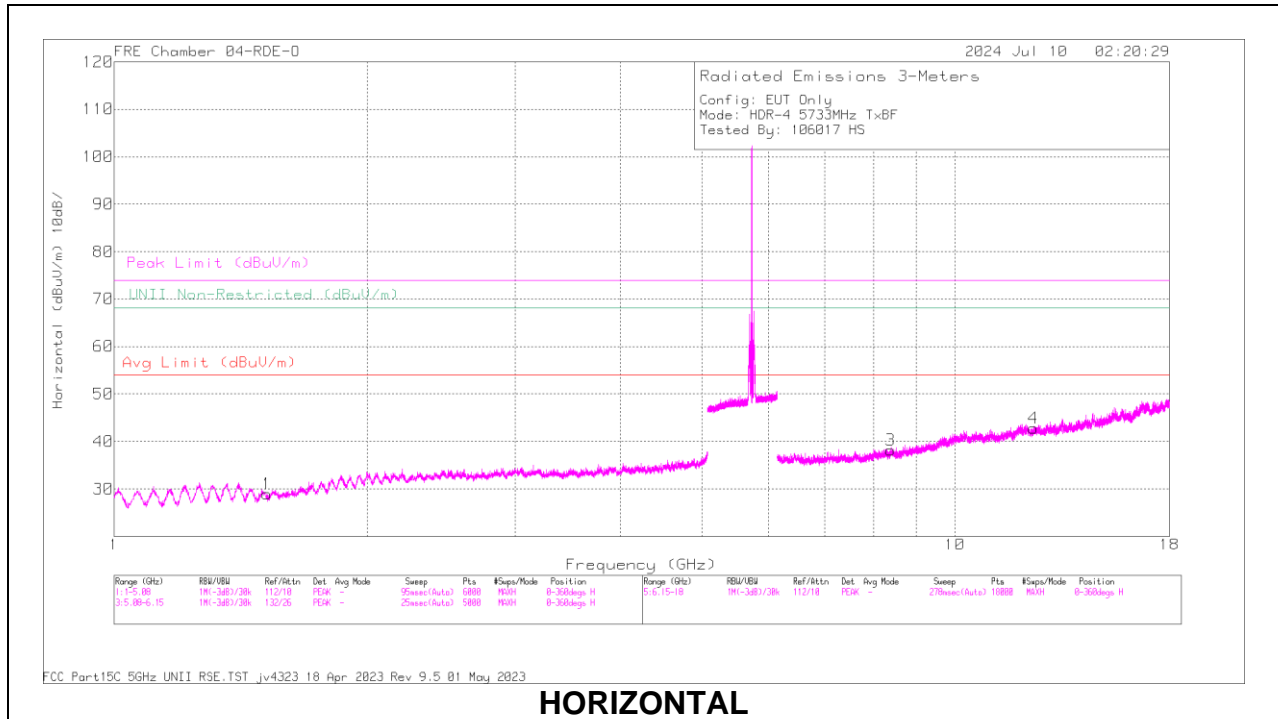


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.519999	56.54	PK-U	28.5	-46.3	0	38.74	-	-	74	-35.26	196	197	H
	* 1.520991	45.02	ADR	28.5	-46.3	0	27.22	54	-26.78	-	-	196	197	H
2	* 1.510825	57.05	PK-U	28.5	-46.2	0	39.35	-	-	74	-34.65	131	395	V
	* 1.510574	45.47	ADR	28.5	-46.2	0	27.77	54	-26.23	-	-	131	395	V
3	* 8.385664	52.62	PK-U	36.1	-40.8	0	47.92	-	-	74	-26.08	238	238	H
	* 8.385447	41.22	ADR	36.1	-40.8	0	36.52	54	-17.48	-	-	238	238	H
4	* 12.394687	53.59	PK-U	39.1	-40.07	0	52.62	-	-	74	-21.38	302	294	H
	* 12.396953	41.51	ADR	39.1	-40	0	40.61	54	-13.39	-	-	302	294	H
5	* 8.37706	52.59	PK-U	36.1	-40.9	0	47.79	-	-	74	-26.21	310	375	V
	* 8.375228	41.1	ADR	36.1	-40.82	0	36.38	54	-17.62	-	-	310	375	V
6	* 12.363857	52.78	PK-U	39.1	-40	0	51.88	-	-	74	-22.12	146	124	V
	* 12.360244	41.16	ADR	39.1	-40.02	0	40.24	54	-13.76	-	-	146	124	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL 5788MHZ

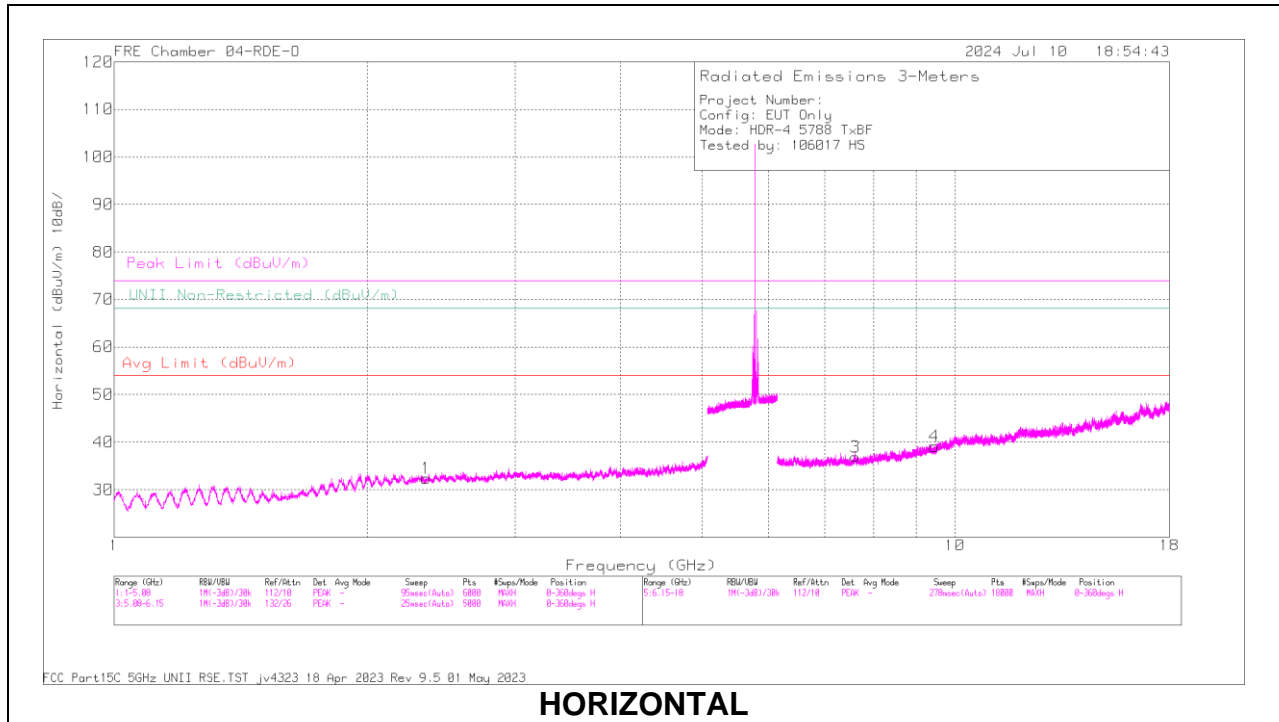

HORIZONTAL

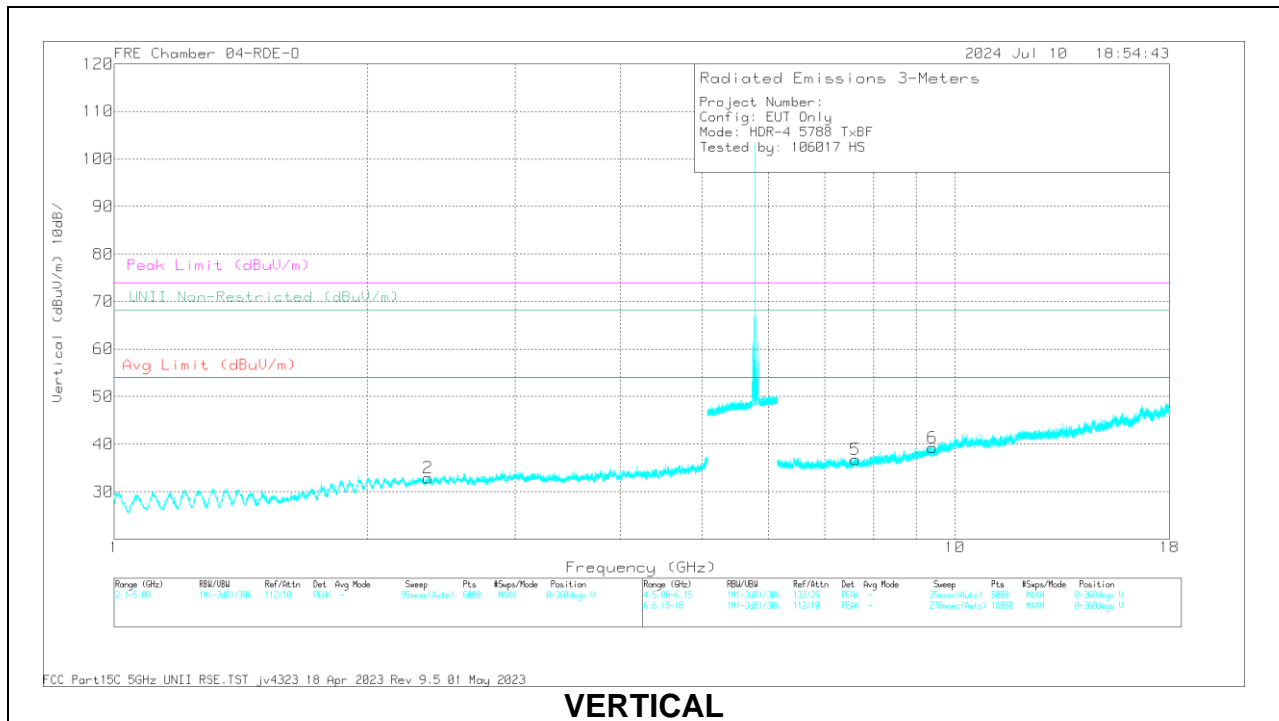


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.349925	56.87	PK-U	32.4	-46.8	0	42.47	-	-	74	-31.53	40	234	H
	* 2.348951	45.39	ADR	32.4	-46.8	0	30.99	54	-23.01	-	-	40	234	H
2	* 2.362017	57.21	PK-U	32.4	-46.8	0	42.81	-	-	74	-31.19	19	158	V
	* 2.359085	45.65	ADR	32.4	-46.8	0	31.25	54	-22.75	-	-	19	158	V
3	* 7.616757	52.14	PK-U	35.9	-40.85	0	47.19	-	-	74	-26.81	2	107	H
	* 7.616539	40.55	ADR	35.9	-40.89	0	35.56	54	-18.44	-	-	2	107	H
4	* 9.451182	53.55	PK-U	37	-41.48	0	49.07	-	-	74	-24.93	345	106	H
	* 9.449835	41.7	ADR	37	-41.42	0	37.28	54	-16.72	-	-	345	106	H
5	* 7.622112	52.09	PK-U	35.9	-41.11	0	46.88	-	-	74	-27.12	201	400	V
	* 7.618835	40.16	ADR	35.9	-40.9	0	35.16	54	-18.84	-	-	201	400	V
6	* 9.4095	53.36	PK-U	37	-41.6	0	48.76	-	-	74	-25.24	246	122	V
	* 9.410523	41.69	ADR	37	-41.45	0	37.24	54	-16.76	-	-	246	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL 5844MHz

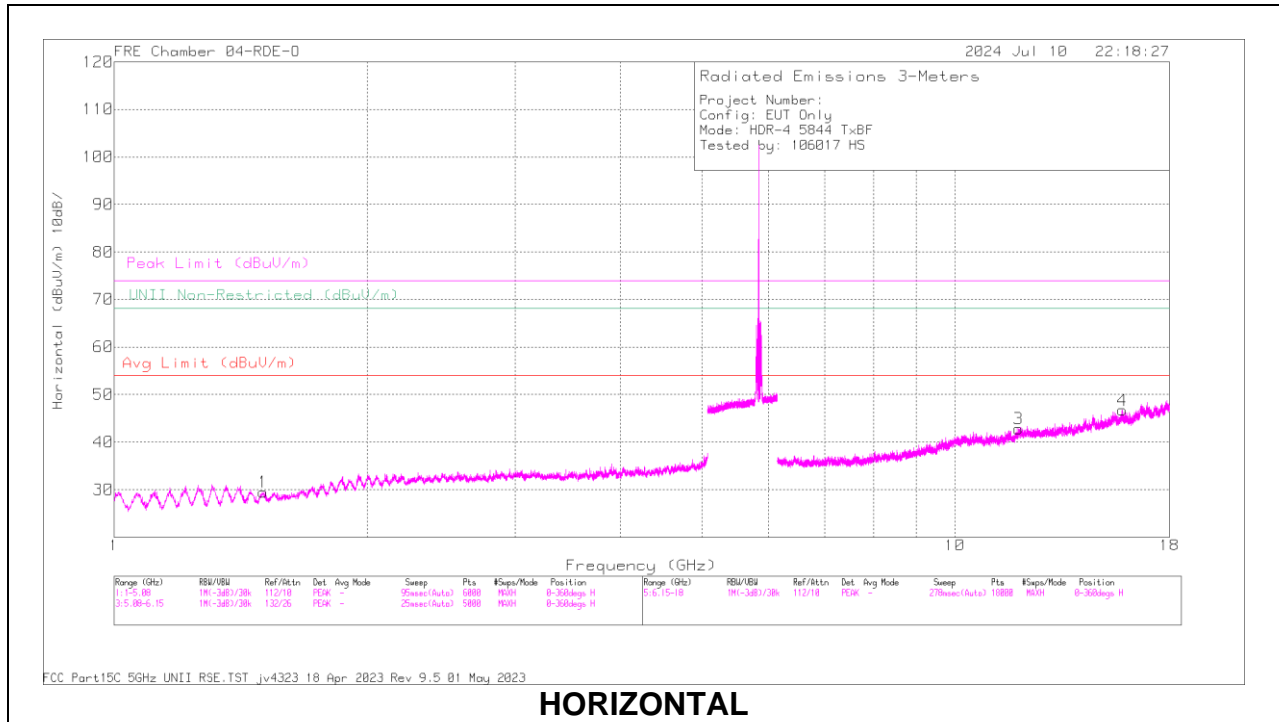

HORIZONTAL

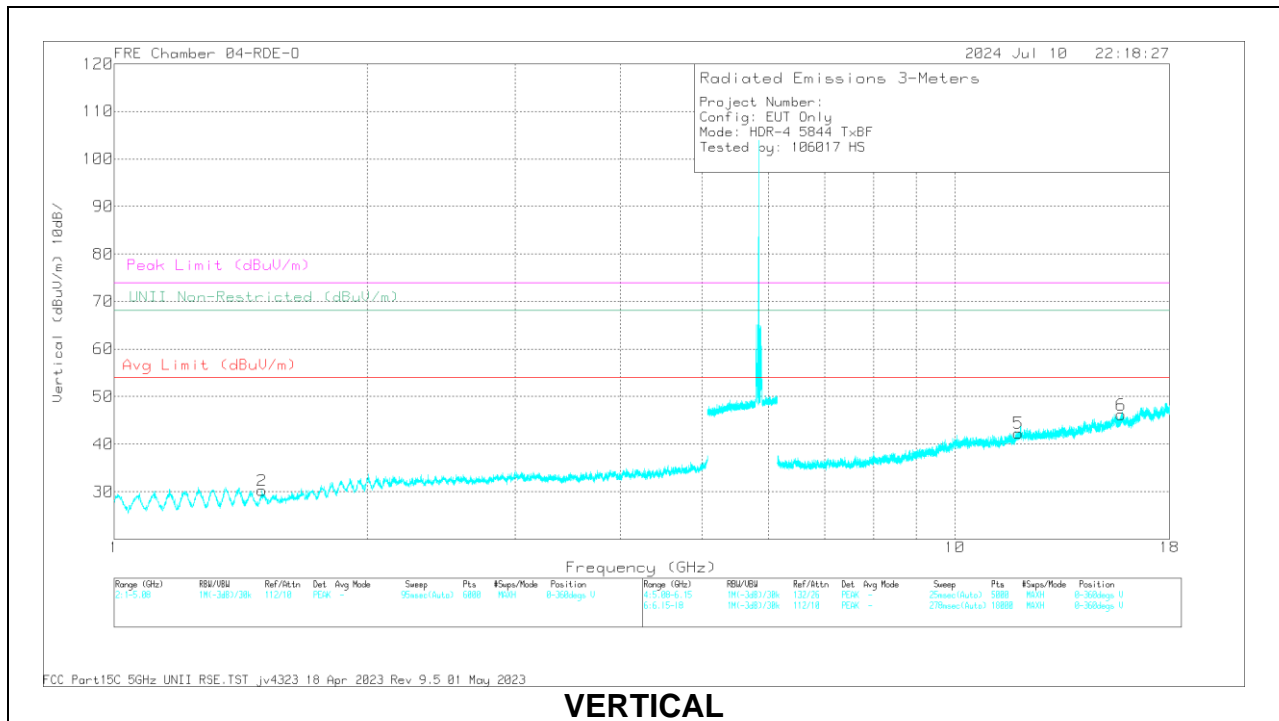

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.502023	57.69	PK-U	28.5	-46.3	0	39.89	-	-	74	-34.11	42	213	H
	* 1.503839	46.09	ADR	28.5	-46.3	0	28.29	54	-25.71	-	-	42	213	H
2	* 1.499895	57.87	PK-U	28.5	-46.39	0	39.98	-	-	74	-34.02	322	112	V
	* 1.500223	46.72	ADR	28.5	-46.38	0	28.84	54	-25.16	-	-	322	112	V
3	* 11.90967	52.75	PK-U	39.1	-39.33	0	52.52	-	-	74	-21.48	322	278	H
	* 11.908935	41.24	ADR	39.1	-39.4	0	40.94	54	-13.06	-	-	322	278	H
4	* 15.812383	52.43	PK-U	41.2	-37.86	0	55.77	-	-	74	-18.23	158	269	H
	* 15.814745	41.08	ADR	41.2	-37.8	0	44.48	54	-9.52	-	-	158	269	H
5	* 11.897576	53	PK-U	39	-39.8	0	52.2	-	-	74	-21.8	62	357	V
	* 11.894959	41.38	ADR	39	-39.9	0	40.48	54	-13.52	-	-	62	357	V
6	* 15.777973	52.27	PK-U	41.1	-37.9	0	55.47	-	-	74	-18.53	313	256	V
	* 15.776924	40.82	ADR	41.1	-38.01	0	43.91	54	-10.09	-	-	313	256	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

10.1.19. HDR4 LOW POWER, UNII-3 BAND, BANDEDGE

ANT 6, SISO MODE

LOW CHANNEL, 5733MHz


HORIZONTAL RESULT

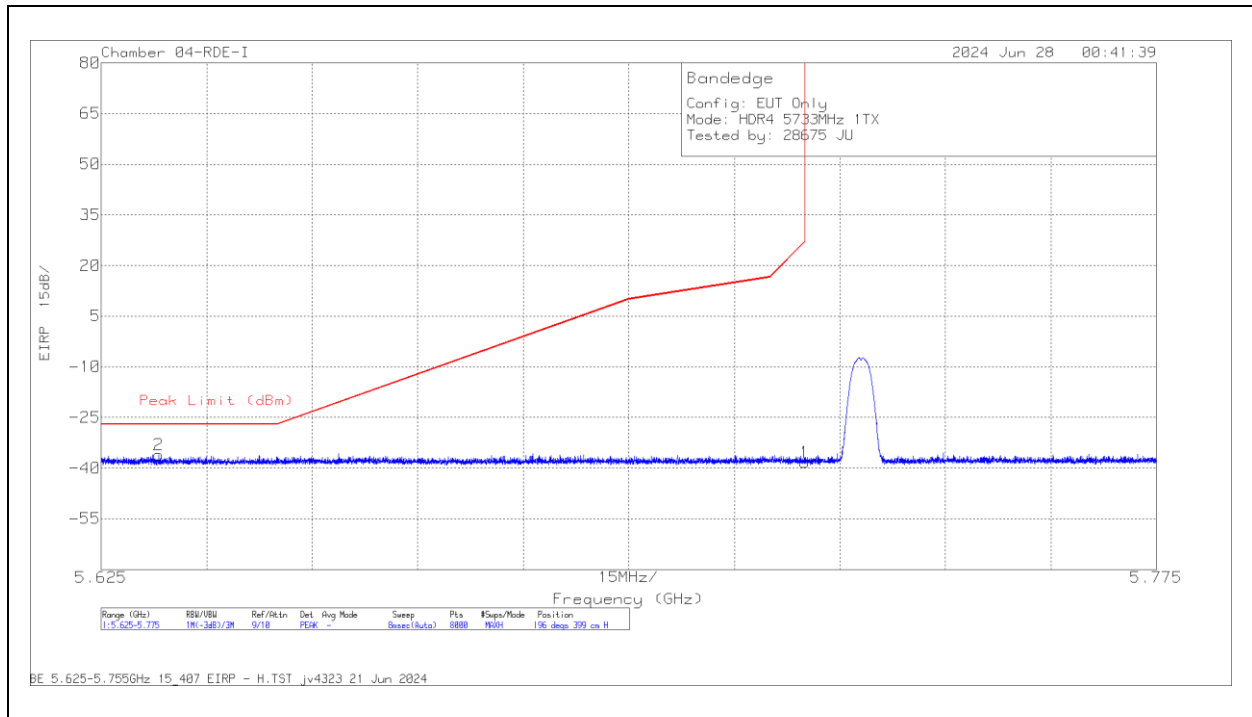

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.633157	-66	Pk	34.9	-16.7	11.8	-36	-27	-9	196	399	H
1	5.725	-68.47	Pk	34.9	-16.6	11.8	-38.37	27	-65.37	196	399	H

Pk - Peak detector

VERTICAL RESULT

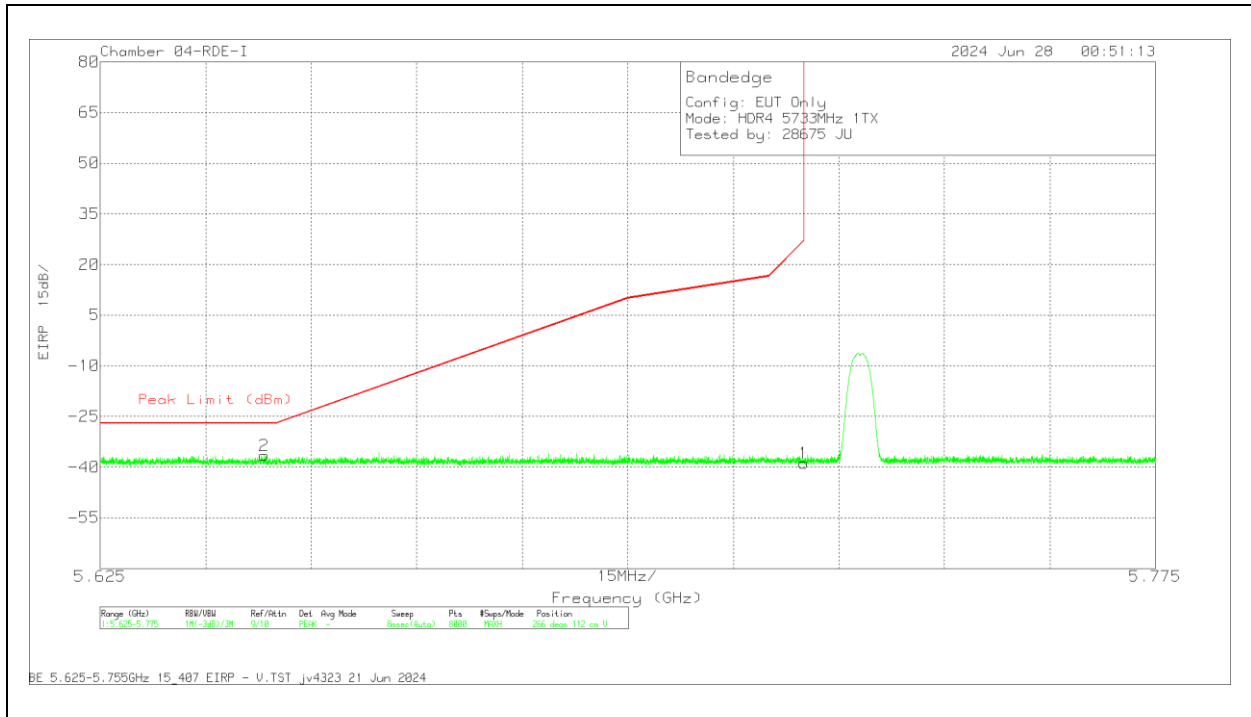


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648346	-66.54	Pk	34.9	-16.7	11.8	-36.54	-27	-9.54	266	112	V
1	5.725	-68.95	Pk	34.9	-16.6	11.8	-38.85	27	-65.85	266	112	V

Pk - Peak detector

HIGH CHANNEL, 5844MHz


HORIZONTAL RESULT

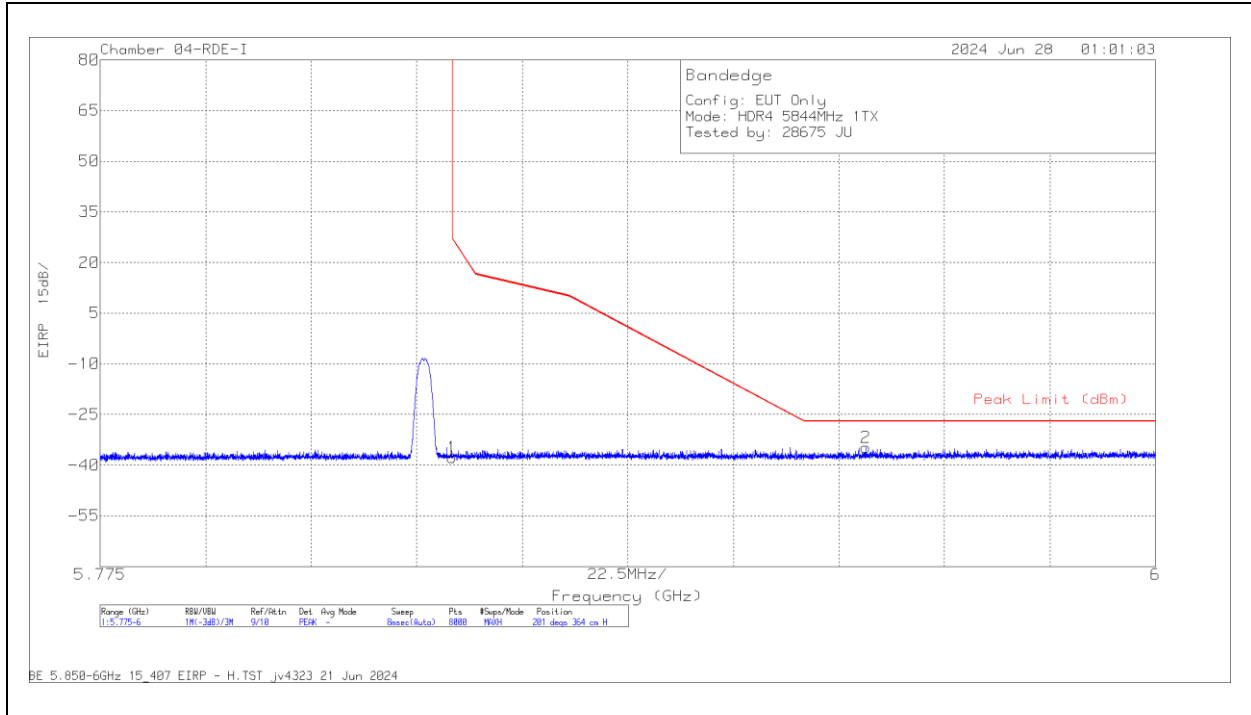

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-69.06	Pk	35	-15.5	11.8	-37.76	27	-64.76	201	364	H
2	5.938261	-66.42	Pk	35.2	-15.4	11.8	-34.82	-27	-7.82	201	364	H

Pk - Peak detector

VERTICAL RESULT

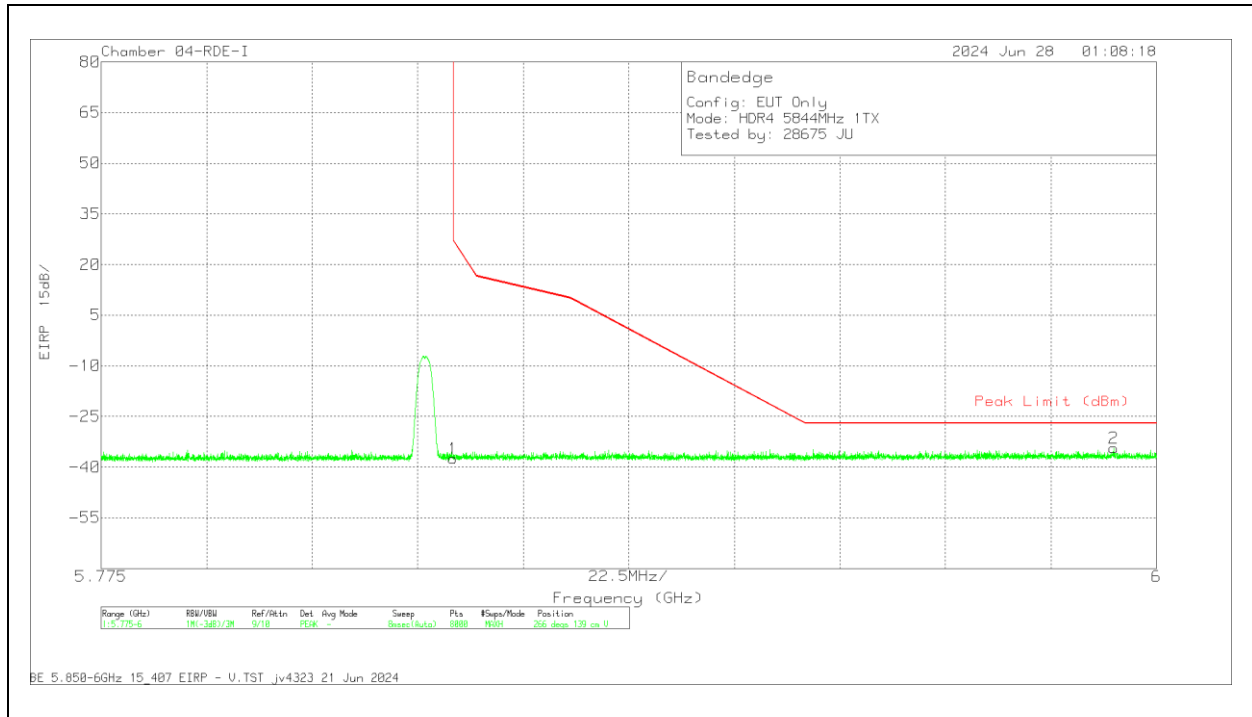


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.77	Pk	35	-15.5	11.8	-37.47	27	-64.47	266	139	V
2	5.990862	-65.82	Pk	35.4	-15.7	11.8	-34.32	-27	-7.32	266	139	V

Pk - Peak detector

ANT 5, SISO MODE

LOW CHANNEL, 5733MHz


HORIZONTAL RESULT

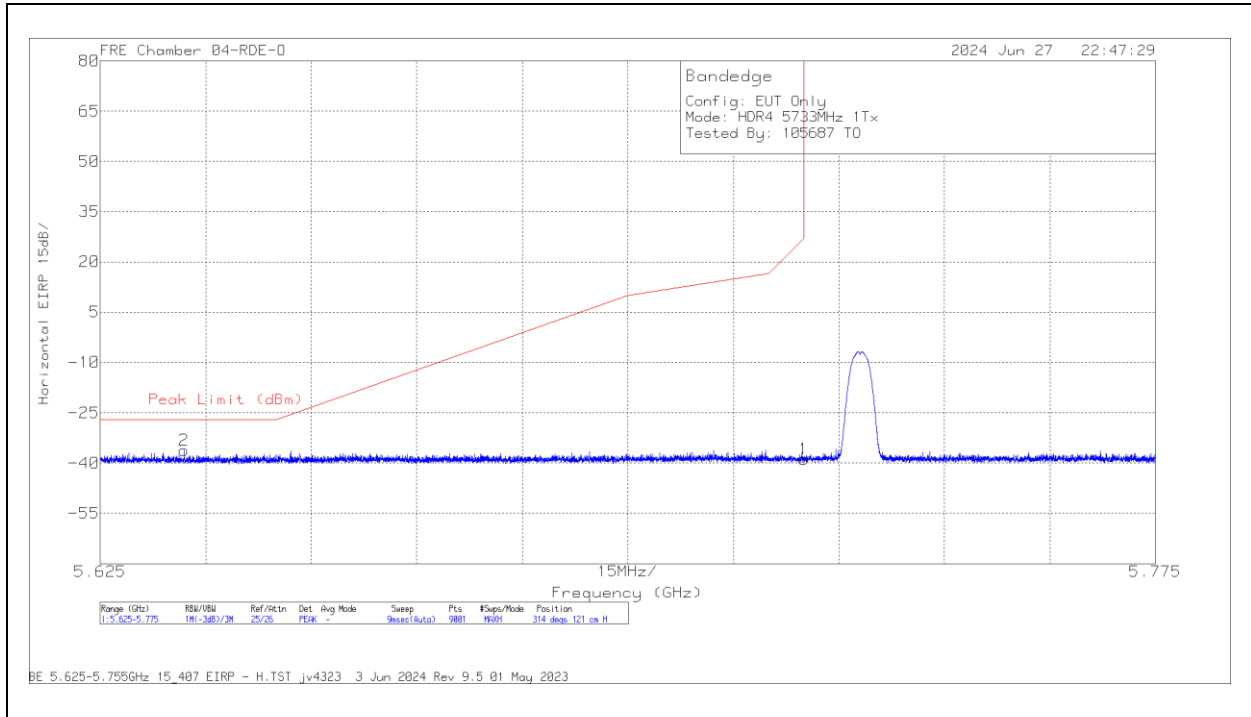

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.636934	-48.96	Pk	35.1	11.8	-34.2	-36.26	-27	-9.26	314	121	H
1	5.725	-51.67	Pk	35.2	11.8	-34.1	-38.77	27	-65.77	314	121	H

Pk - Peak detector

VERTICAL RESULT

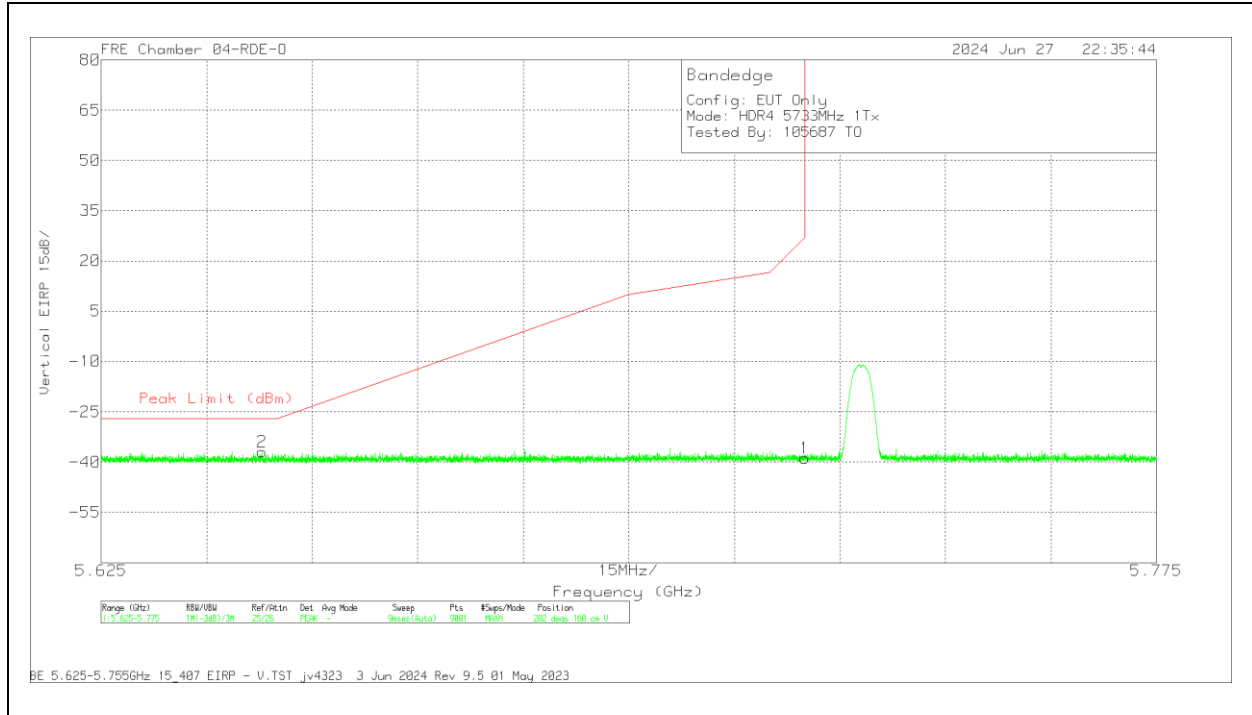


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647834	-49.83	Pk	35.1	11.8	-34.08	-37.01	-27	-10.01	202	160	V
1	5.725	-51.72	Pk	35.2	11.8	-34.1	-38.82	27	-65.82	202	160	V

Pk - Peak detector

HIGH CHANNEL, 5844MHz


HORIZONTAL RESULT

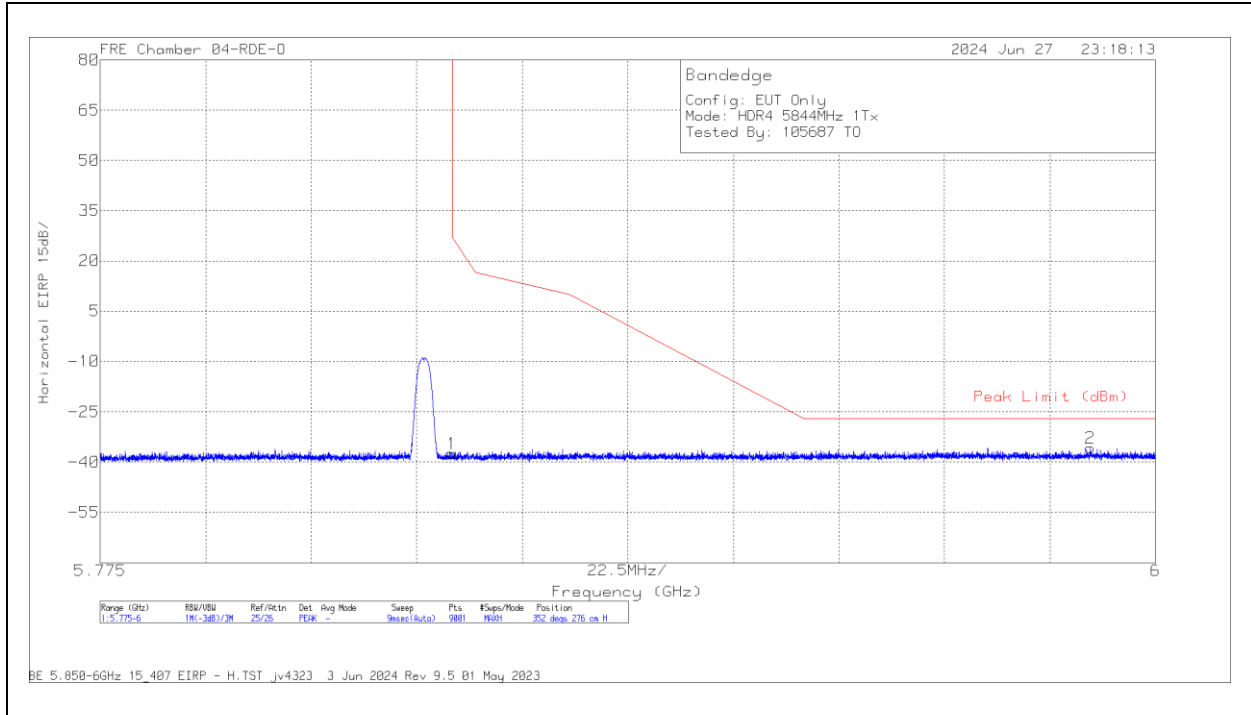

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-50.86	Pk	35.4	11.8	-33.8	-37.46	27	-64.46	352	276	H
2	5.9861	-49.55	Pk	35.6	11.8	-33.6	-35.75	-27	-8.75	352	276	H

Pk - Peak detector

VERTICAL RESULT

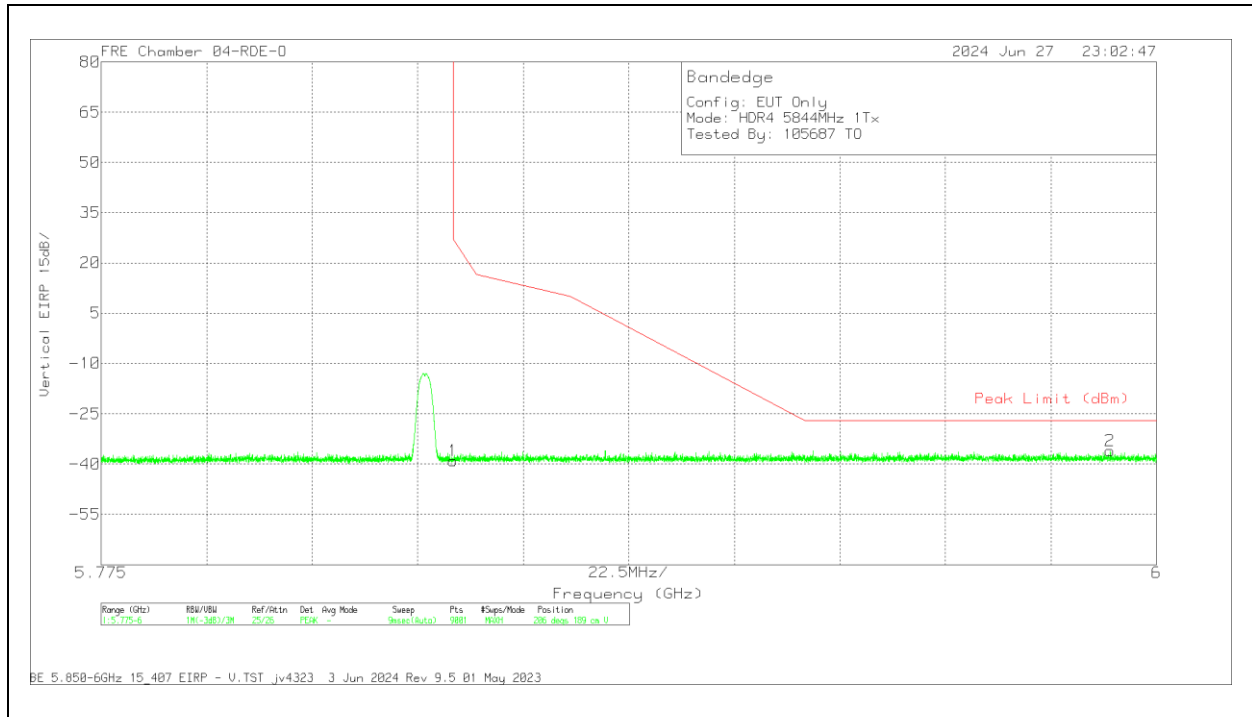


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.42	PK	35.4	11.8	-33.8	-39.02	27	-66.02	206	189	V
2	5.990125	-49.94	PK	35.6	11.8	-33.5	-36.04	-27	-9.04	206	189	V

Pk - Peak detector

ANT 6 + ANT 5, MIMO TXBF MODE

LOW CHANNEL, 5733MHz


HORIZONTAL RESULT

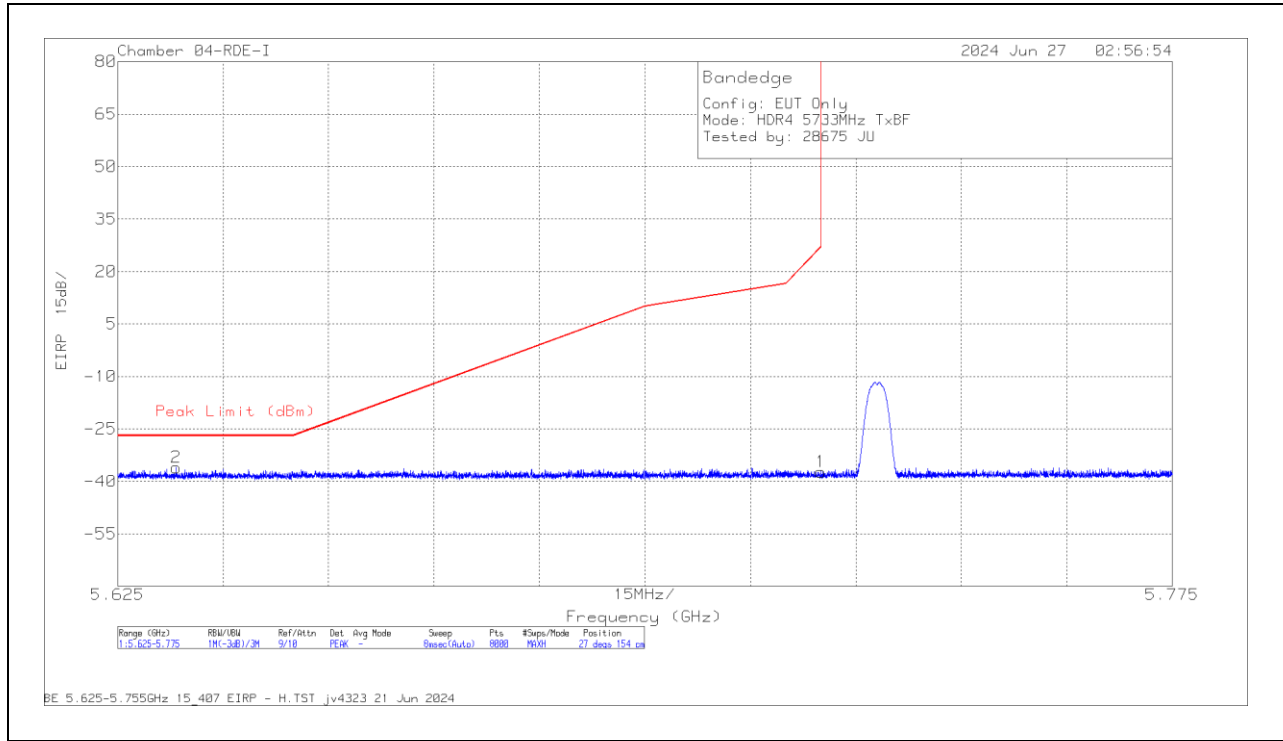

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.633326	-66.04	Pk	34.9	-16.7	11.8	-36.04	-27	-9.04	27	154	H
1	5.725	-67.41	Pk	34.9	-16.6	11.8	-37.31	27	-64.31	27	154	H

Pk - Peak detector

VERTICAL RESULT

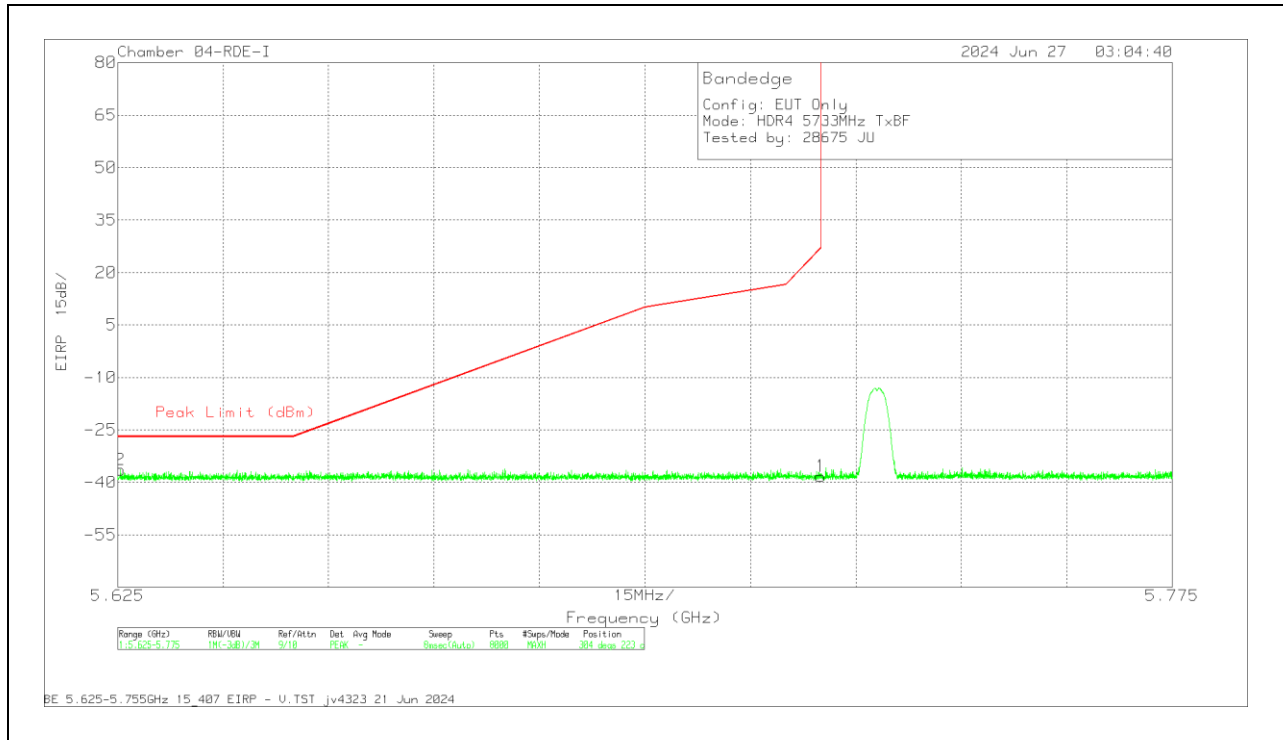


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.625413	-66.51	Pk	34.9	-16.6	11.8	-36.41	-27	-9.41	304	223	V
1	5.725	-68.38	Pk	34.9	-16.6	11.8	-38.28	27	-65.28	304	223	V

Pk - Peak detector

HIGH CHANNEL, 5844MHz

HORIZONTAL RESULT

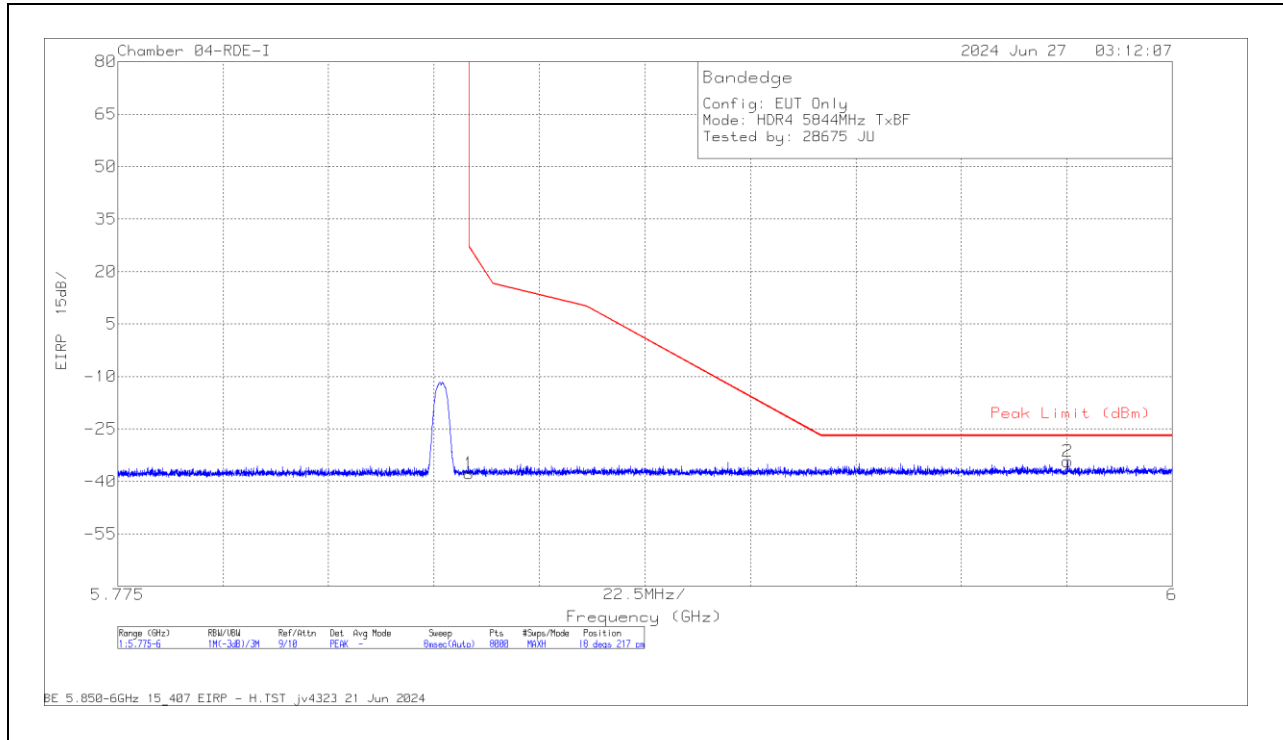

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-69.1	Pk	35	-15.5	11.8	-37.8	27	-64.8	18	217	H
2	5.977669	-65.64	Pk	35.3	-15.7	11.8	-34.24	-27	-7.24	18	217	H

Pk - Peak detector

VERTICAL RESULT





Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.59	Pk	35	-15.5	11.8	-37.29	27	-64.29	318	182	V
2	5.989934	-66.25	Pk	35.4	-15.7	11.8	-34.75	-27	-7.75	318	182	V

Pk - Peak detector

10.1.20. HDR4 LOW POWER, UNII-3 BAND, MIMO TXBF MODE HARMONIC AND SPURIOUS

LOW CHANNEL, 5733MHZ

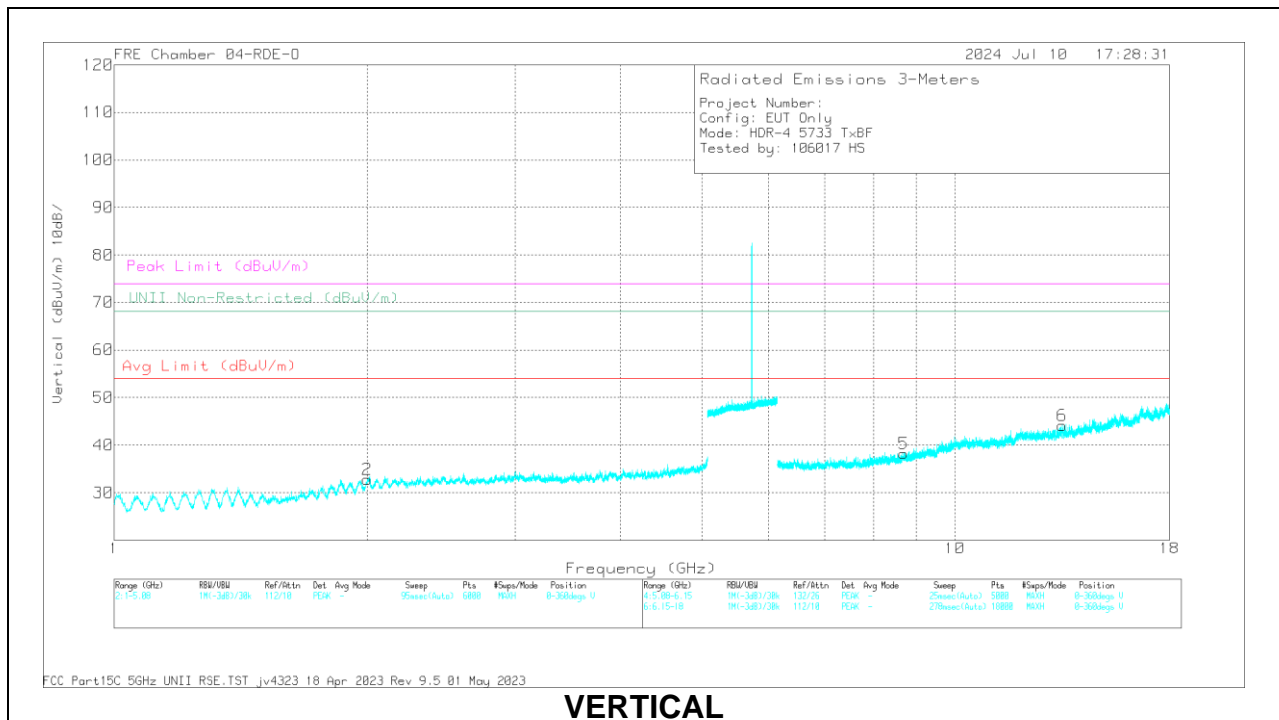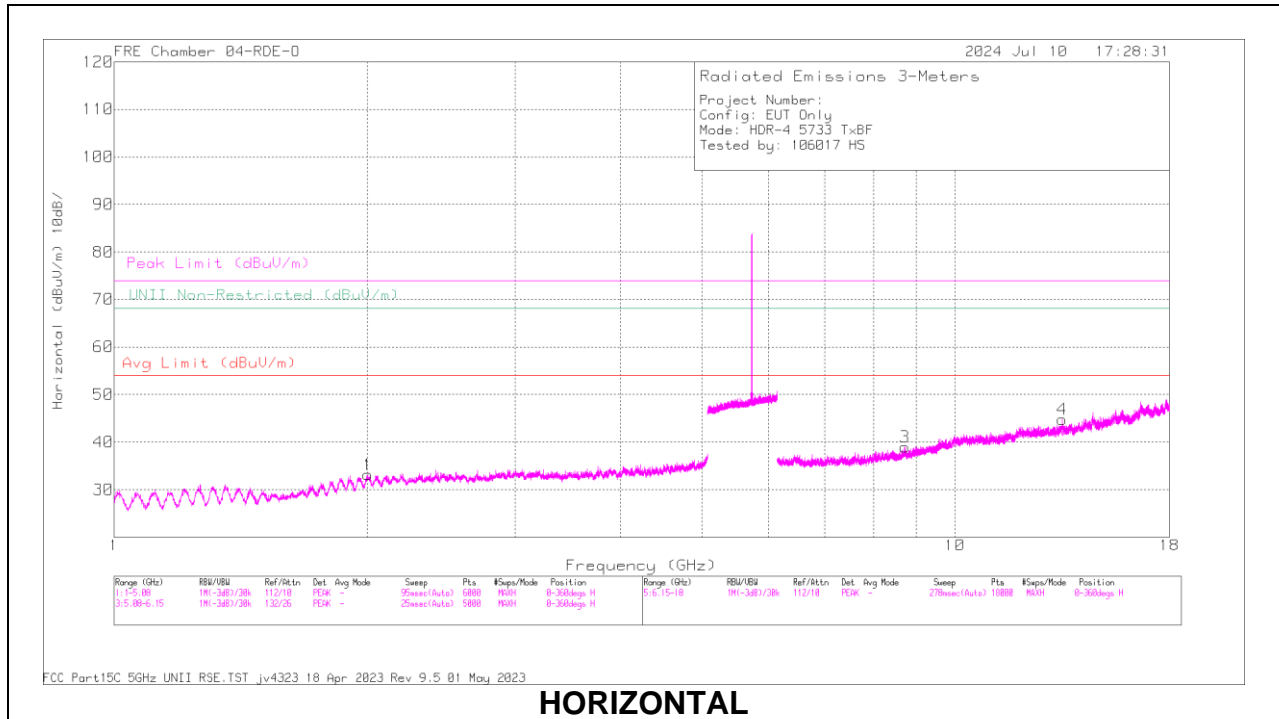


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.000759	58.18	PK-U	31.7	-46.62	0	43.26	-	-	68.2	-24.94	159	146	V
1	2.00737	57.95	PK-U	31.7	-46.76	0	42.89	-	-	68.2	-25.31	142	140	H
5	8.681501	52.38	PK-U	36.1	-40.9	0	47.58	-	-	68.2	-20.62	155	379	V
3	8.717084	52.15	PK-U	36.1	-40.1	0	48.15	-	-	68.2	-20.05	232	363	H
4	13.423259	52.94	PK-U	39.1	-37.5	0	54.54	-	-	68.2	-13.66	50	257	H
6	13.423539	52.45	PK-U	39.1	-37.5	0	54.05	-	-	68.2	-14.15	293	145	V

PK-U - U-NII: Maximum Peak

MID CHANNEL, 5788MHZ

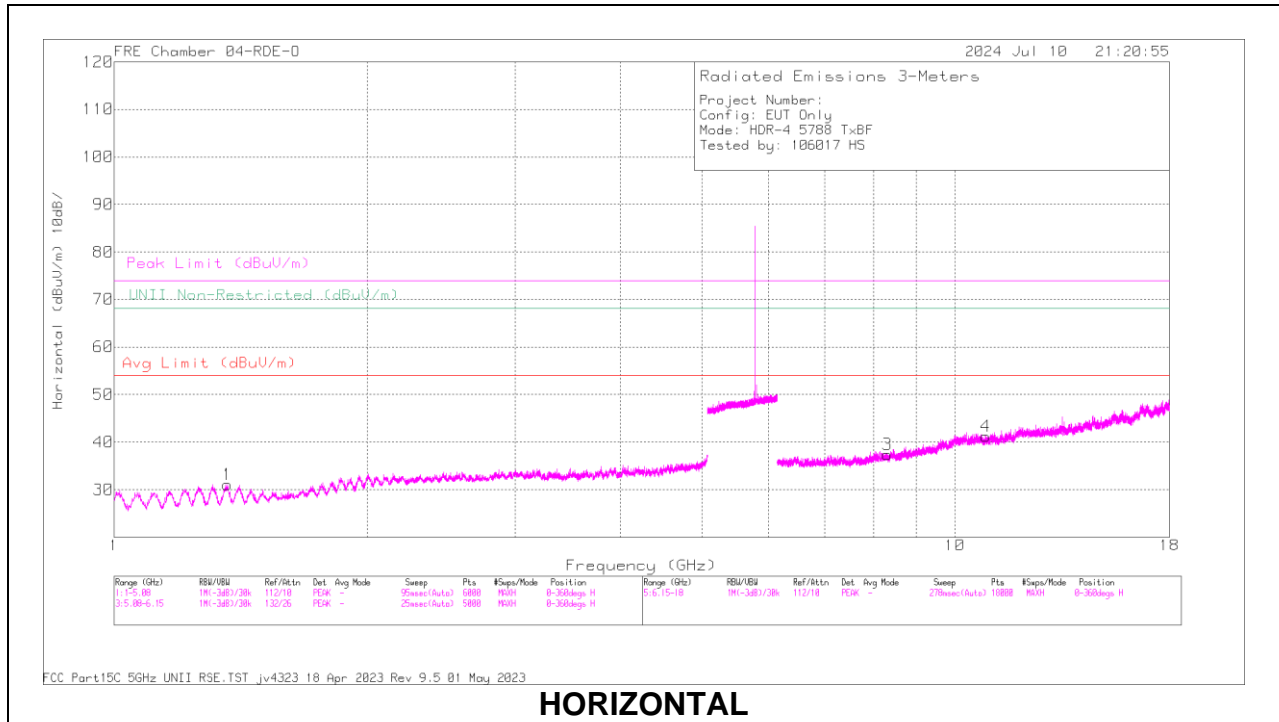

HORIZONTAL

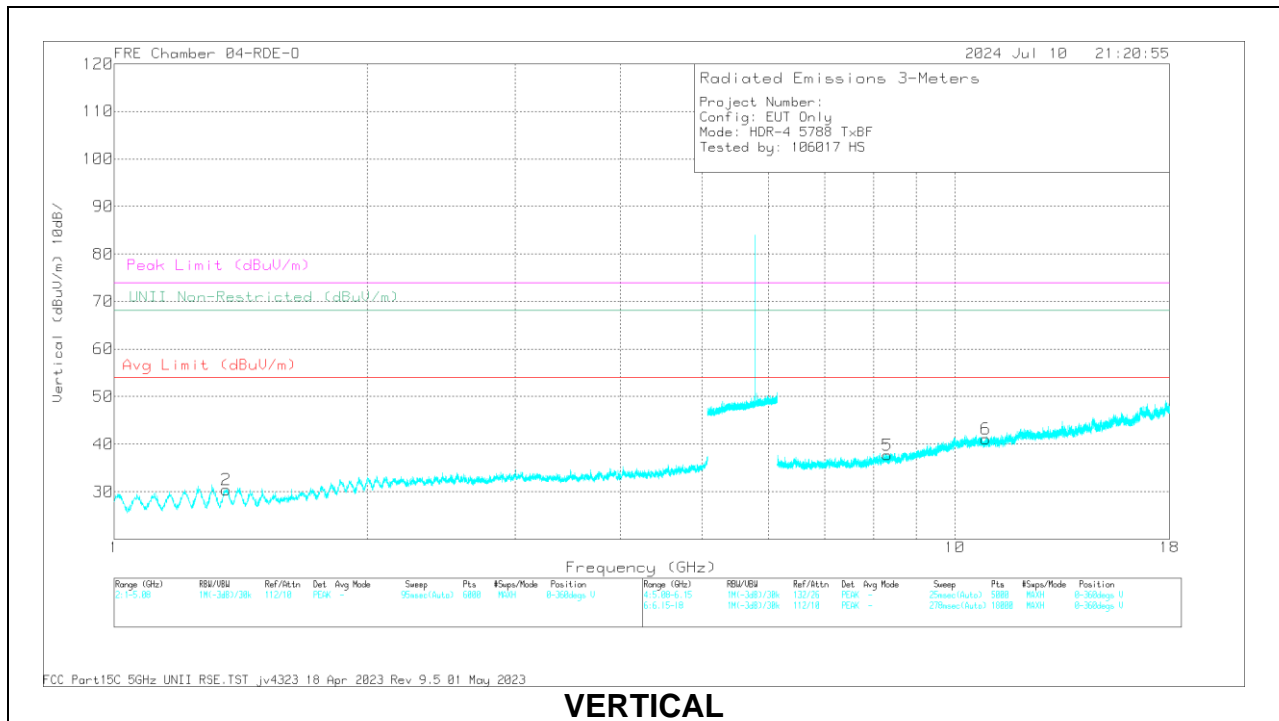


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.361825	57.94	PK-U	29.1	-46.3	0	40.74	-	-	74	-33.26	205	227	H
	* 1.362215	46.23	ADR	29.1	-46.32	0	29.01	54	-24.99	-	-	205	227	H
2	* 1.360821	57.99	PK-U	29.1	-46.32	0	40.77	-	-	74	-33.23	88	218	V
	* 1.358949	46.47	ADR	29.1	-46.4	0	29.17	54	-24.83	-	-	88	218	V
3	* 8.315149	52.2	PK-U	36.1	-40.91	0	47.39	-	-	74	-26.61	128	219	H
	* 8.315592	40.58	ADR	36.1	-40.96	0	35.72	54	-18.28	-	-	128	219	H
4	* 10.892021	51.68	PK-U	38.5	-39.2	0	50.98	-	-	74	-23.02	233	272	H
	* 10.891204	40.13	ADR	38.5	-39.28	0	39.35	54	-14.65	-	-	233	272	H
5	* 8.314311	51.65	PK-U	36.1	-40.97	0	46.78	-	-	74	-27.22	2	390	V
	* 8.313679	40.43	ADR	36.1	-40.97	0	35.56	54	-18.44	-	-	2	390	V
6	* 10.877842	51.81	PK-U	38.5	-39.9	0	50.41	-	-	74	-23.59	106	286	V
	* 10.878888	40.32	ADR	38.5	-39.81	0	39.01	54	-14.99	-	-	106	286	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL, 5844MHz

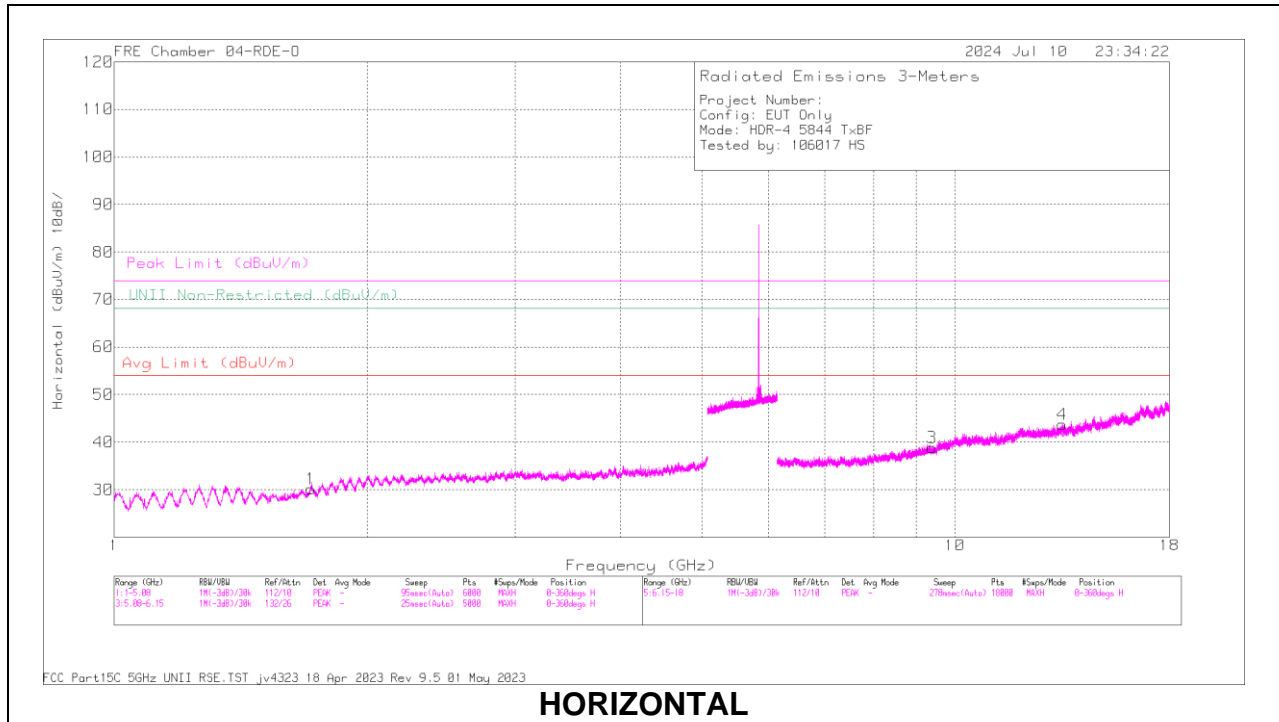

HORIZONTAL

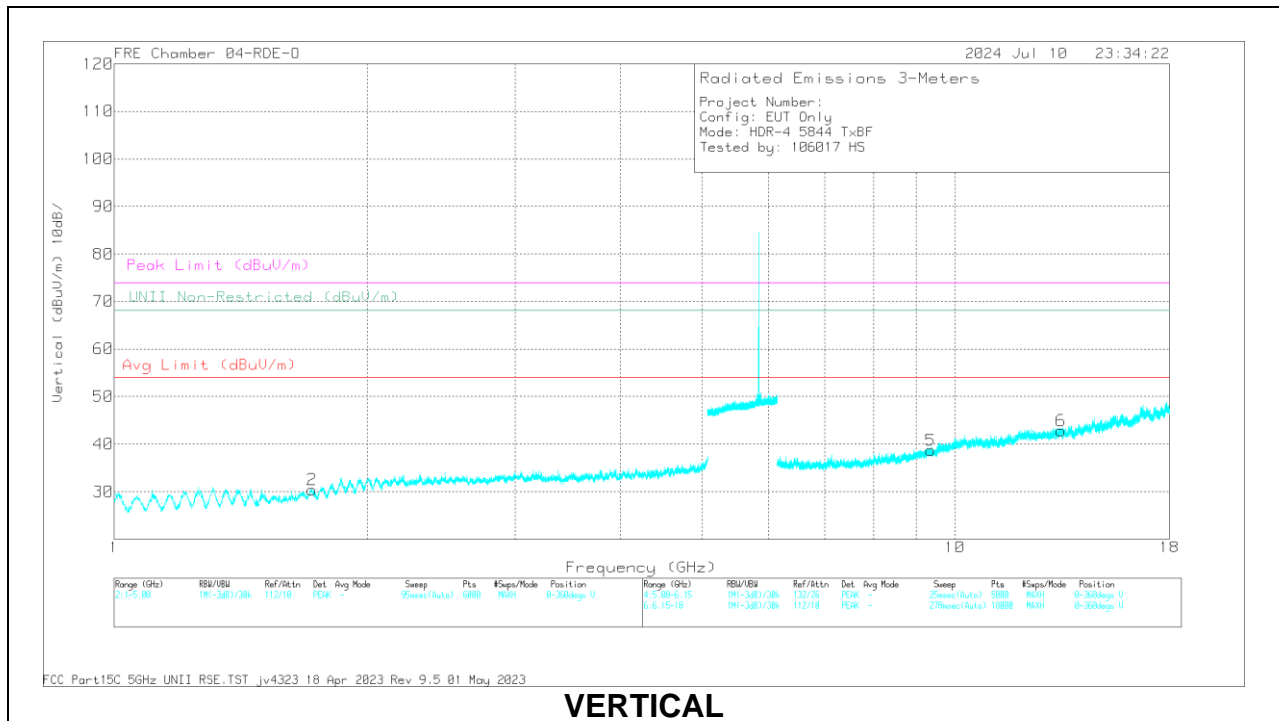

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 1.719578	57.42	PK-U	29.6	-46.44	0	40.58	-	-	74	-33.42	353	395	V
	* 1.720193	45.8	ADR	29.6	-46.4	0	29	54	-25	-	-	353	395	V
3	* 9.391108	52.9	PK-U	36.9	-41.4	0	48.4	-	-	74	-25.6	186	223	H
	* 9.388316	41.38	ADR	36.9	-41.3	0	36.98	54	-17.02	-	-	186	223	H
5	* 9.356053	53.22	PK-U	36.8	-41.4	0	48.62	-	-	74	-25.38	178	120	V
	* 9.352197	41.77	ADR	36.8	-41.58	0	36.99	54	-17.01	-	-	178	120	V
6	* 13.381101	52.39	PK-U	39.2	-38.8	0	52.79	-	-	74	-21.21	330	298	V
	* 13.382304	40.57	ADR	39.2	-38.8	0	40.97	54	-13.03	-	-	330	298	V
1	* 1.71774	57.57	PK-U	29.5	-46.43	0	40.64	-	-	68.2	-27.56	9	132	H
	13.412654	52.36	PK-U	39.2	-38.03	0	53.53	-	-	68.2	-14.67	200	182	H
4	13.414011	40.83	ADR	39.2	-38.1	0	41.93	-	-	-	-	200	182	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

10.1.21. HDR8 HIGH POWER, UNII-3 BAND, BANDEDGE

ANT 6, SISO MODE

LOW CHANNEL, 5733MHz


HORIZONTAL RESULT

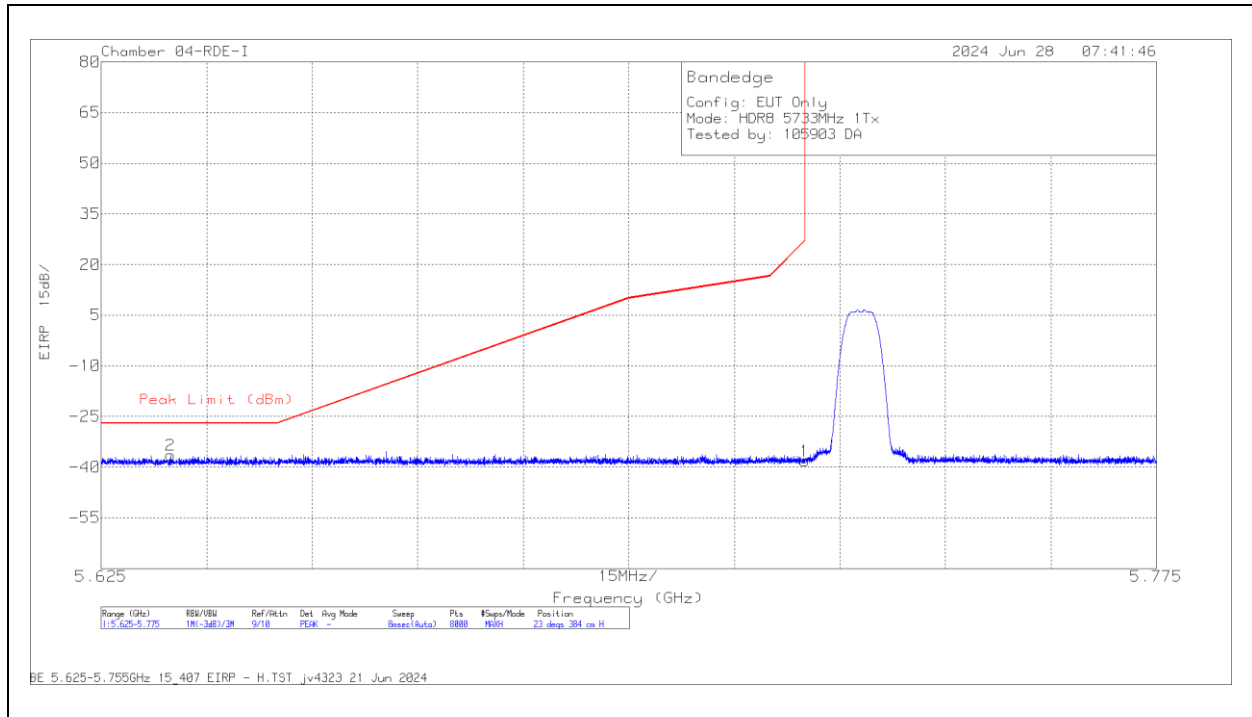

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.634901	-66.52	Pk	34.9	-16.7	11.8	-36.52	-27	-9.52	23	384	H
1	5.725	-68.31	Pk	34.9	-16.6	11.8	-38.21	27	-65.21	23	384	H

Pk - Peak detector

VERTICAL RESULT

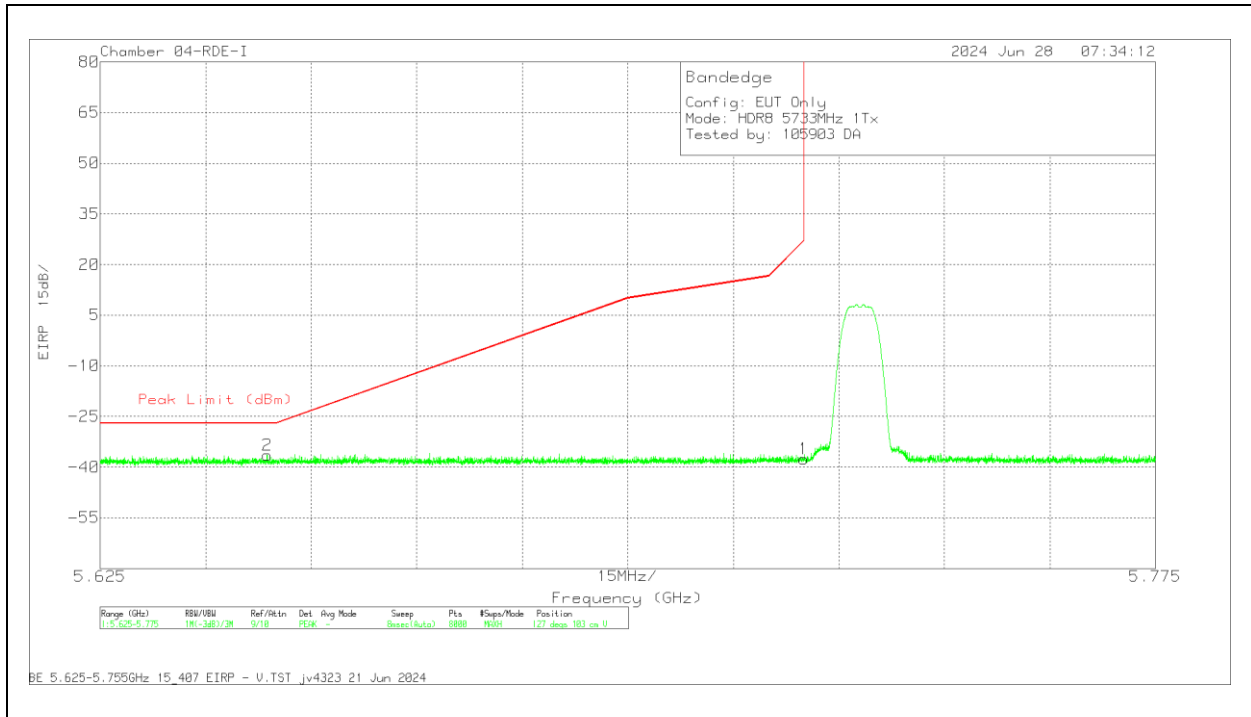


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648721	-66.41	Pk	34.9	-16.7	11.8	-36.41	-27	-9.41	127	103	V
1	5.725	-67.72	Pk	34.9	-16.6	11.8	-37.62	27	-64.62	127	103	V

Pk - Peak detector

HIGH CHANNEL, 5844MHz


HORIZONTAL RESULT

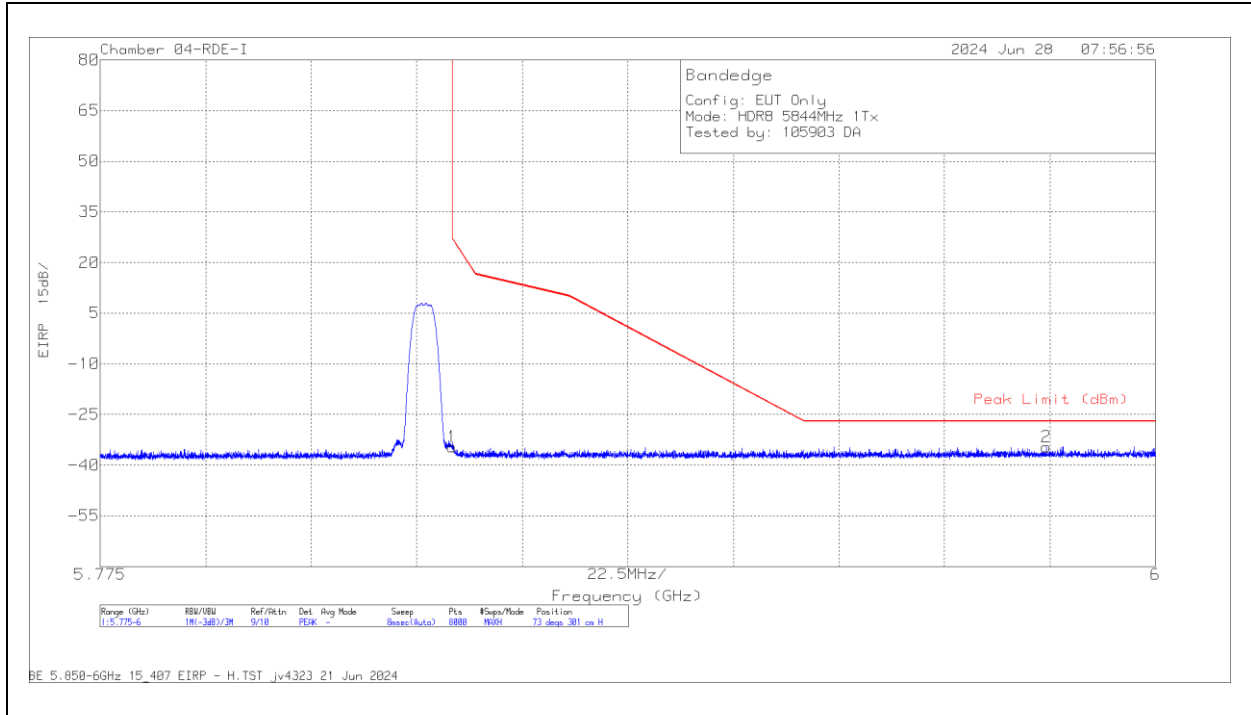

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.94	Pk	35	-15.5	11.8	-34.64	27	-61.64	73	301	H
2	5.976713	-66.04	Pk	35.3	-15.6	11.8	-34.54	-27	-7.54	73	301	H

Pk - Peak detector

VERTICAL RESULT

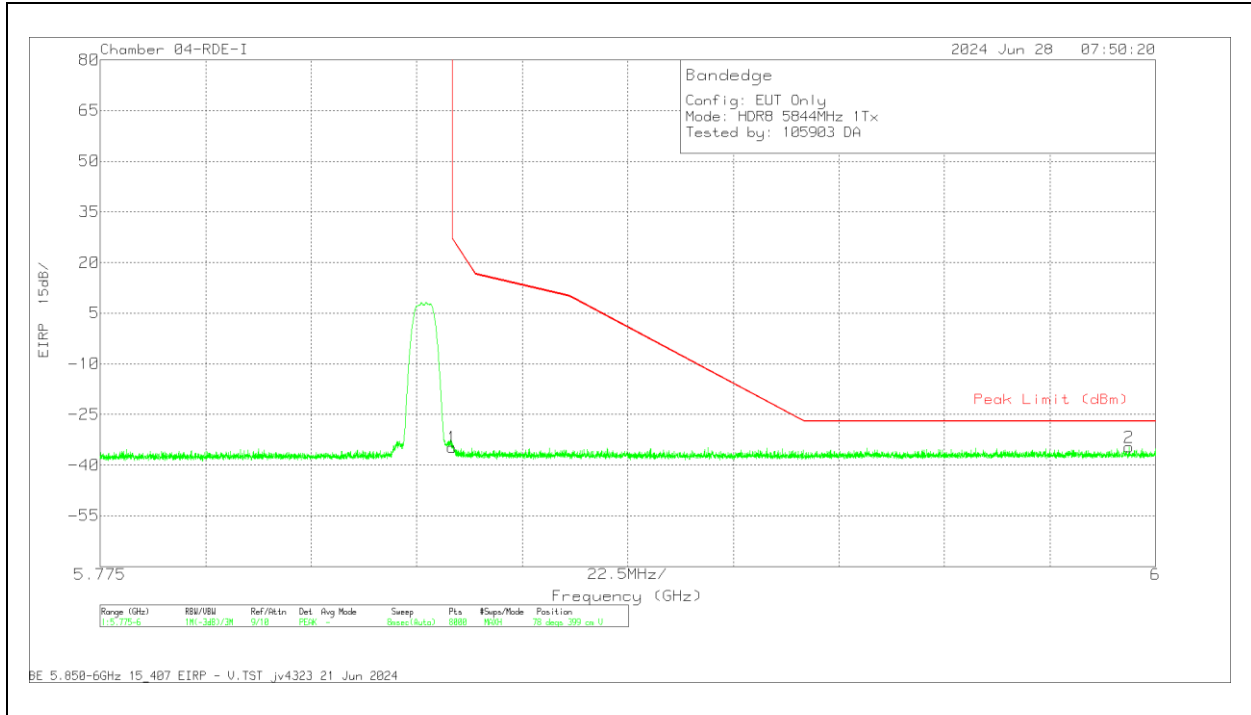


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.12	Pk	35	-15.5	11.8	-34.82	27	-61.82	78	399	V
2	5.99435	-66.18	Pk	35.4	-15.7	11.8	-34.68	-27	-7.68	78	399	V

Pk - Peak detector

ANT 5, SISO MODE

LOW CHANNEL, 5733MHz


HORIZONTAL RESULT

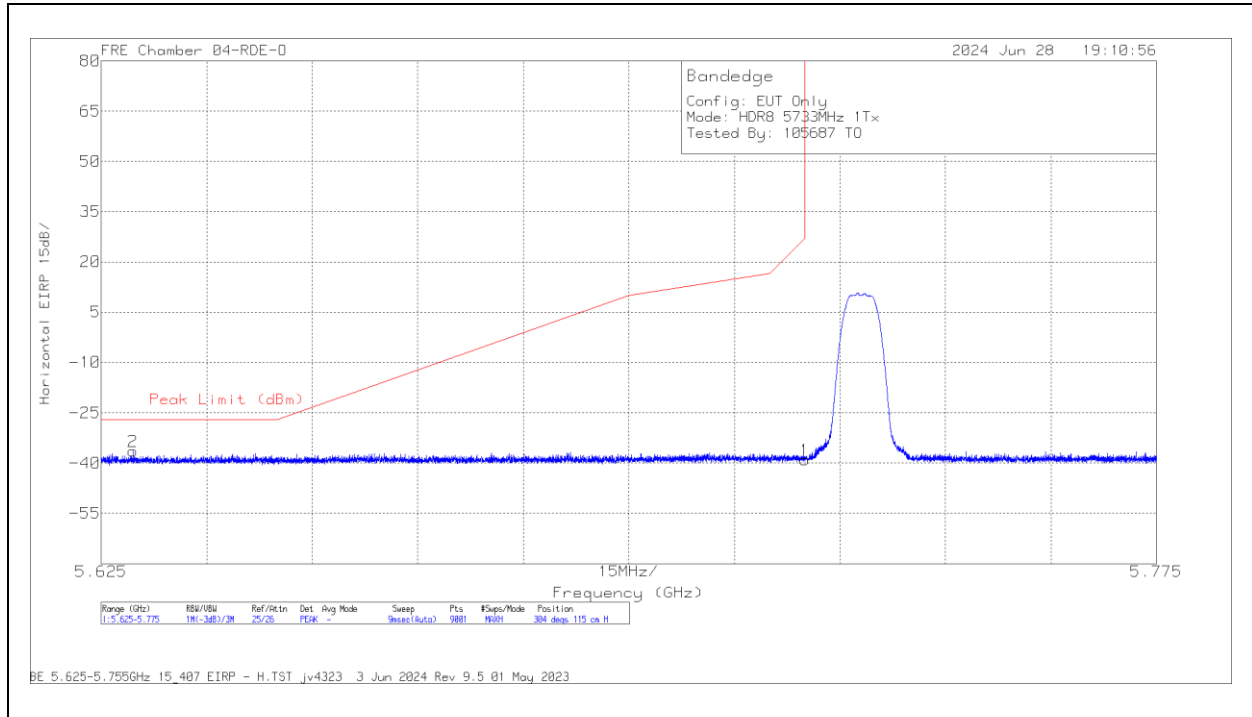

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6295	-49.24	Pk	35.1	11.8	-34.15	-36.49	-27	-9.49	304	115	H
1	5.725	-52.01	Pk	35.2	11.8	-34.1	-39.11	27	-66.11	304	115	H

Pk - Peak detector

VERTICAL RESULT

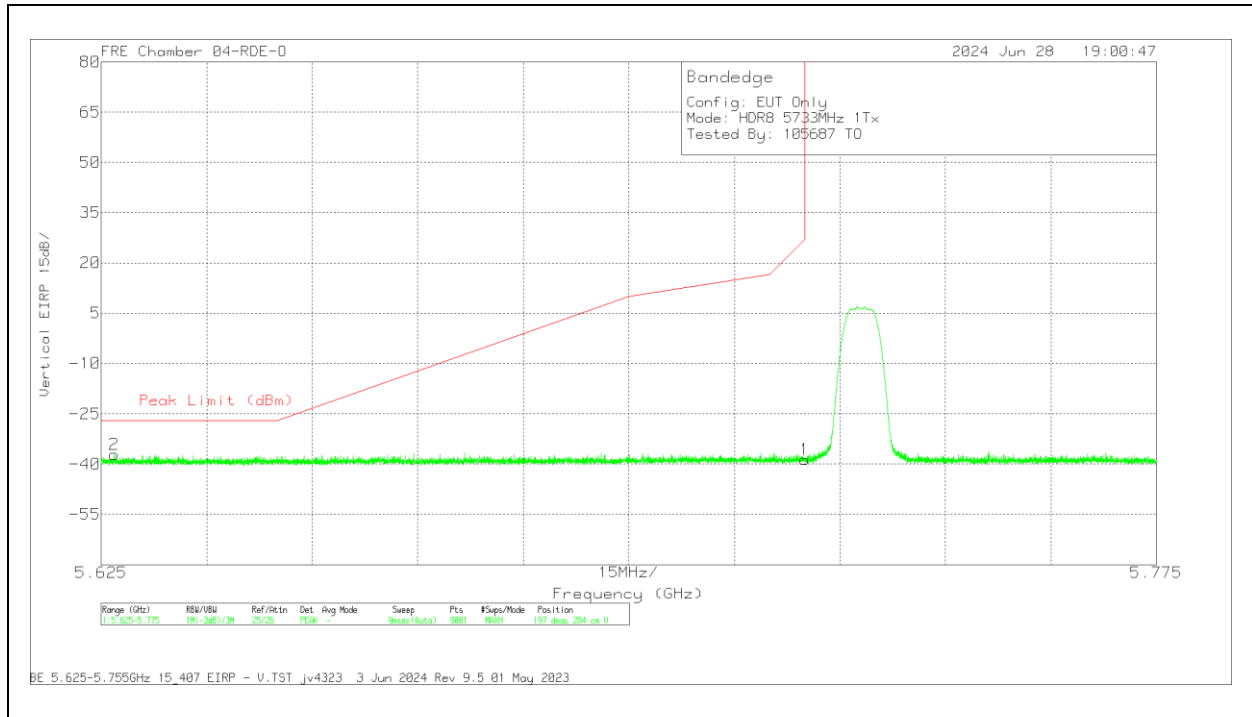


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.626817	-49.83	Pk	35.1	11.8	-34.2	-37.13	-27	-10.13	197	284	V
1	5.725	-51.5	Pk	35.2	11.8	-34.1	-38.6	27	-65.6	197	284	V

Pk - Peak detector

HIGH CHANNEL, 5844MHz


HORIZONTAL RESULT

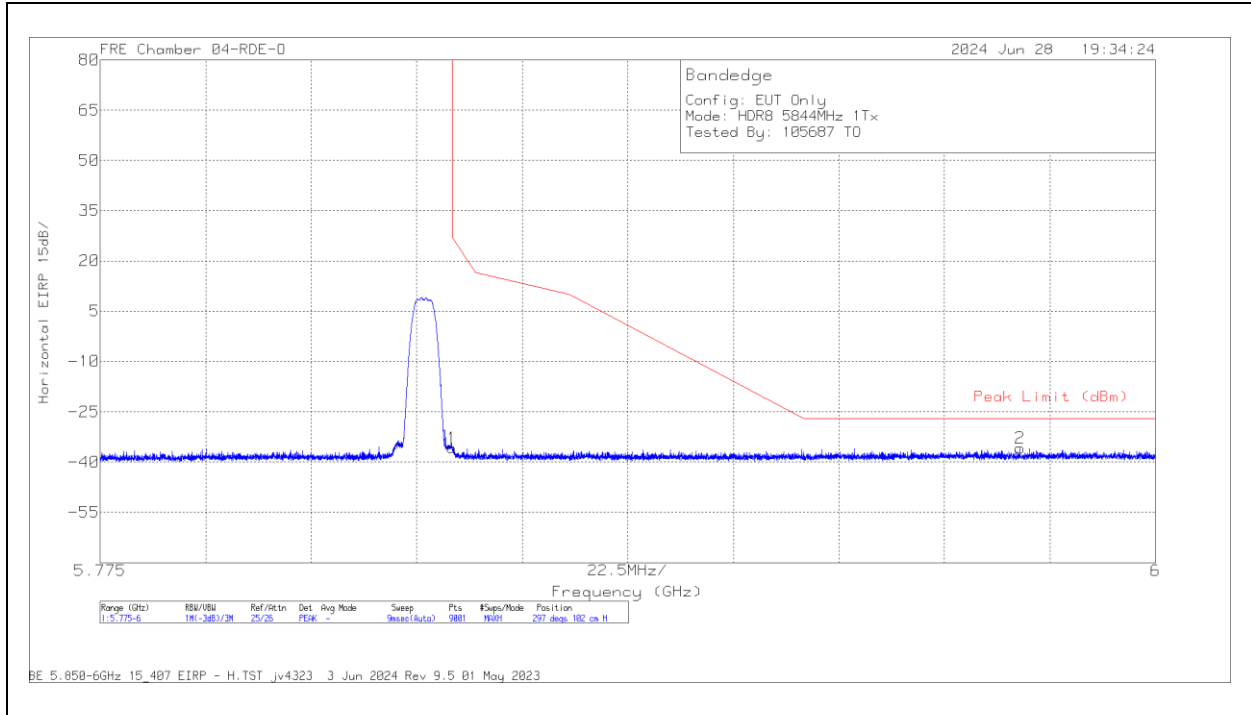

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-49.15	Pk	35.4	11.8	-33.8	-35.75	27	-62.75	297	102	H
2	5.971125	-49.46	Pk	35.6	11.8	-33.71	-35.77	-27	-8.77	297	102	H

Pk - Peak detector

VERTICAL RESULT

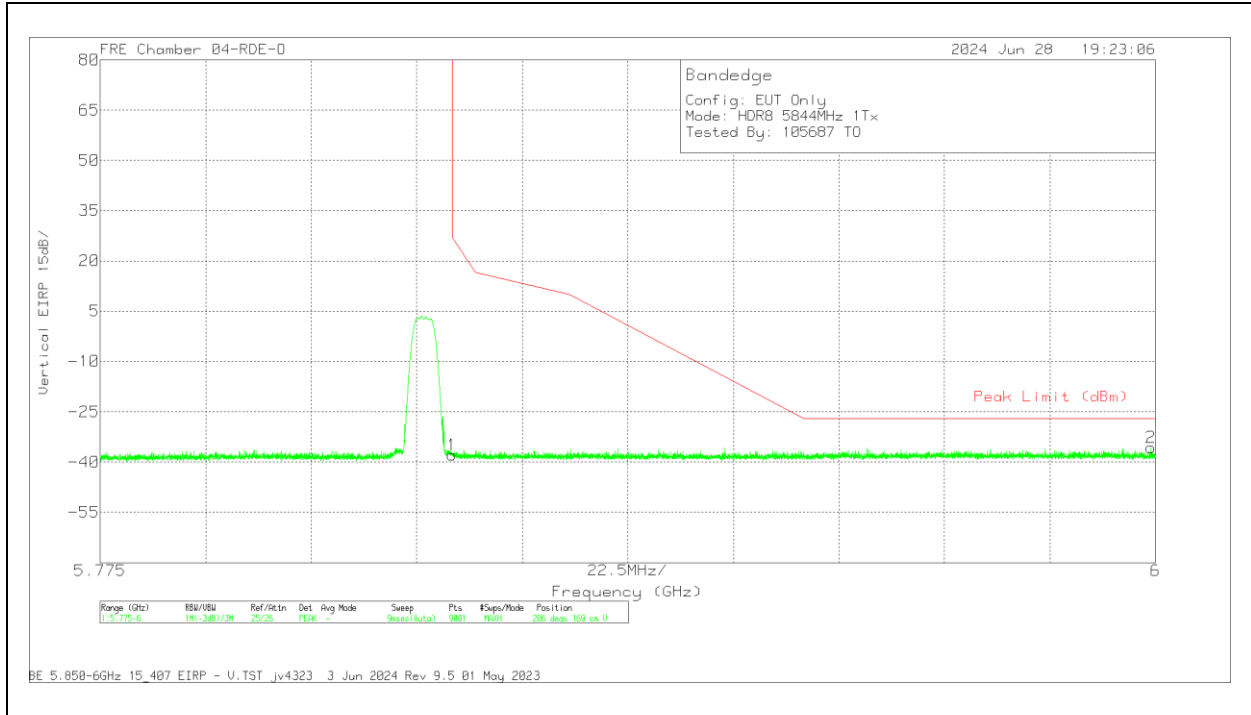


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 1m ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-51.34	Pk	35.4	11.8	-33.8	-37.94	27	-64.94	206	169	V
2	5.9991	-49.28	Pk	35.6	11.8	-33.69	-35.57	-27	-8.57	206	169	V

Pk - Peak detector

ANT 6 + ANT 5, MIMO TXBF MODE

LOW CHANNEL, 5733MHz


HORIZONTAL RESULT

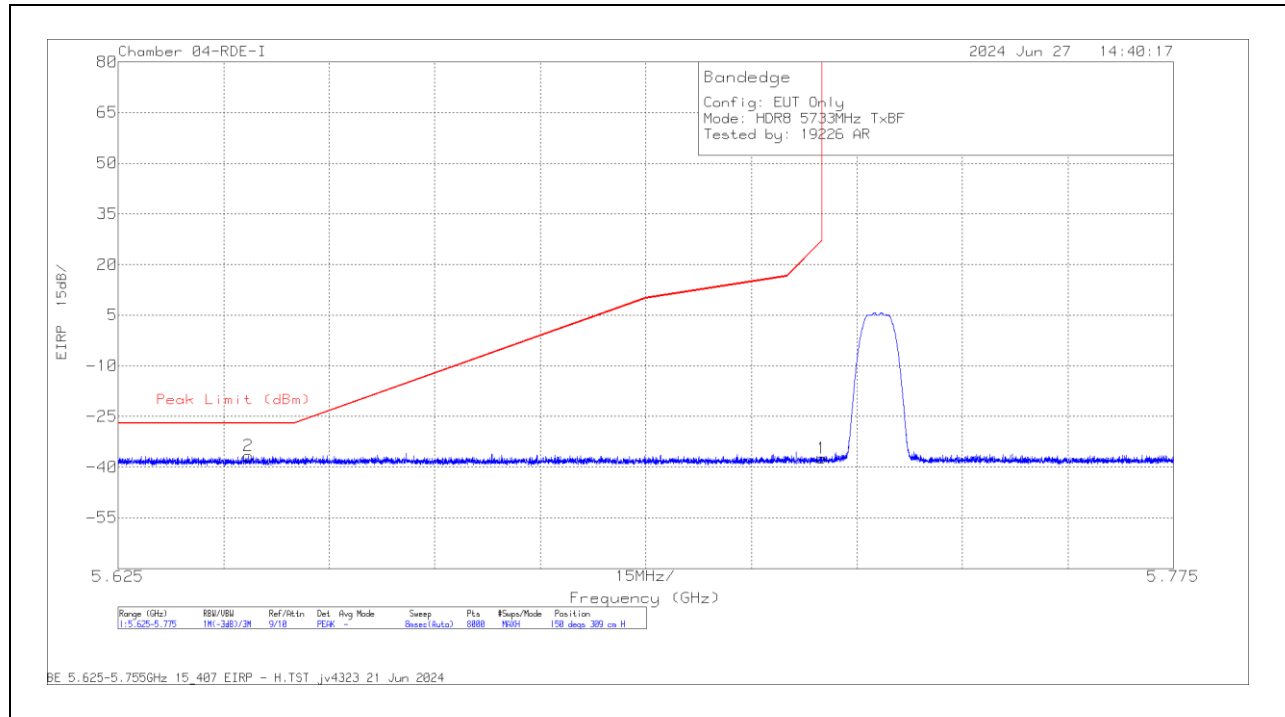

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.643489	-66.6	Pk	34.9	-16.7	11.8	-36.6	-27	-9.6	150	309	H
1	5.725	-67.51	Pk	34.9	-16.6	11.8	-37.41	27	-64.41	150	309	H

Pk - Peak detector

VERTICAL RESULT

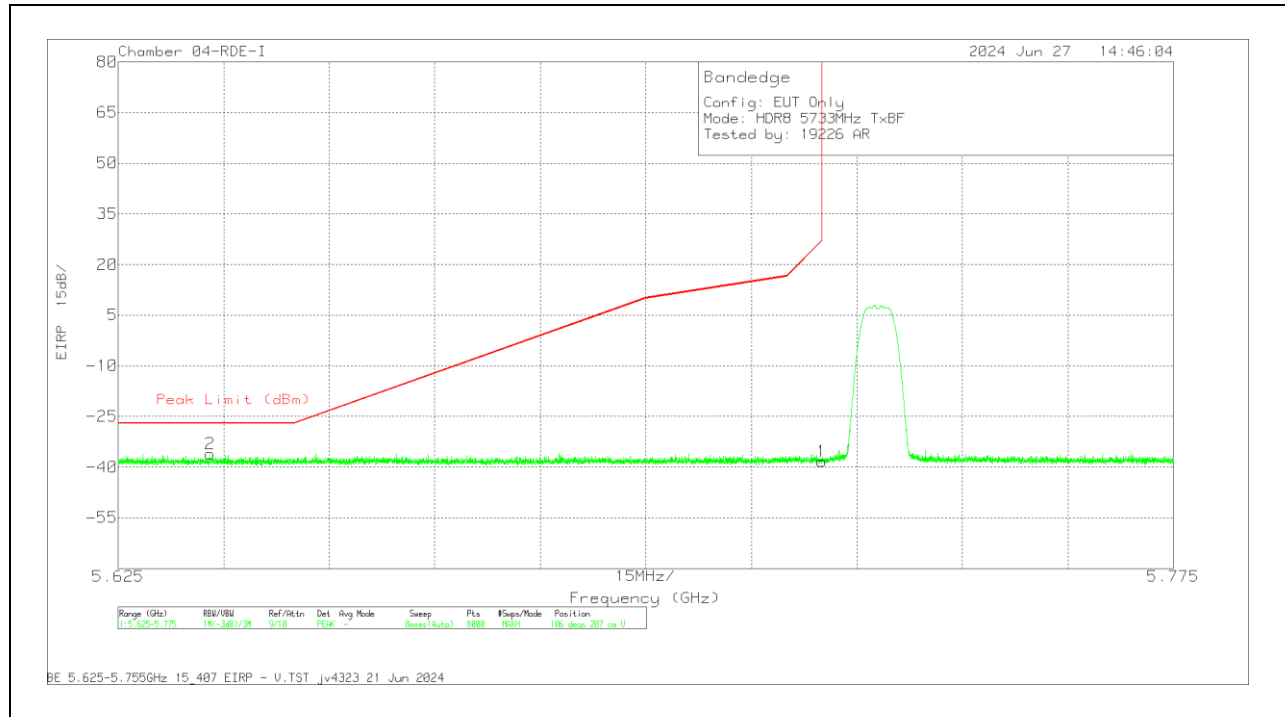


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.638033	-66.2	Pk	34.9	-16.6	11.8	-36.1	-27	-9.1	106	207	V
1	5.725	-68.37	Pk	34.9	-16.6	11.8	-38.27	27	-65.27	106	207	V

Pk - Peak detector

HIGH CHANNEL, 5844MHz


HORIZONTAL RESULT

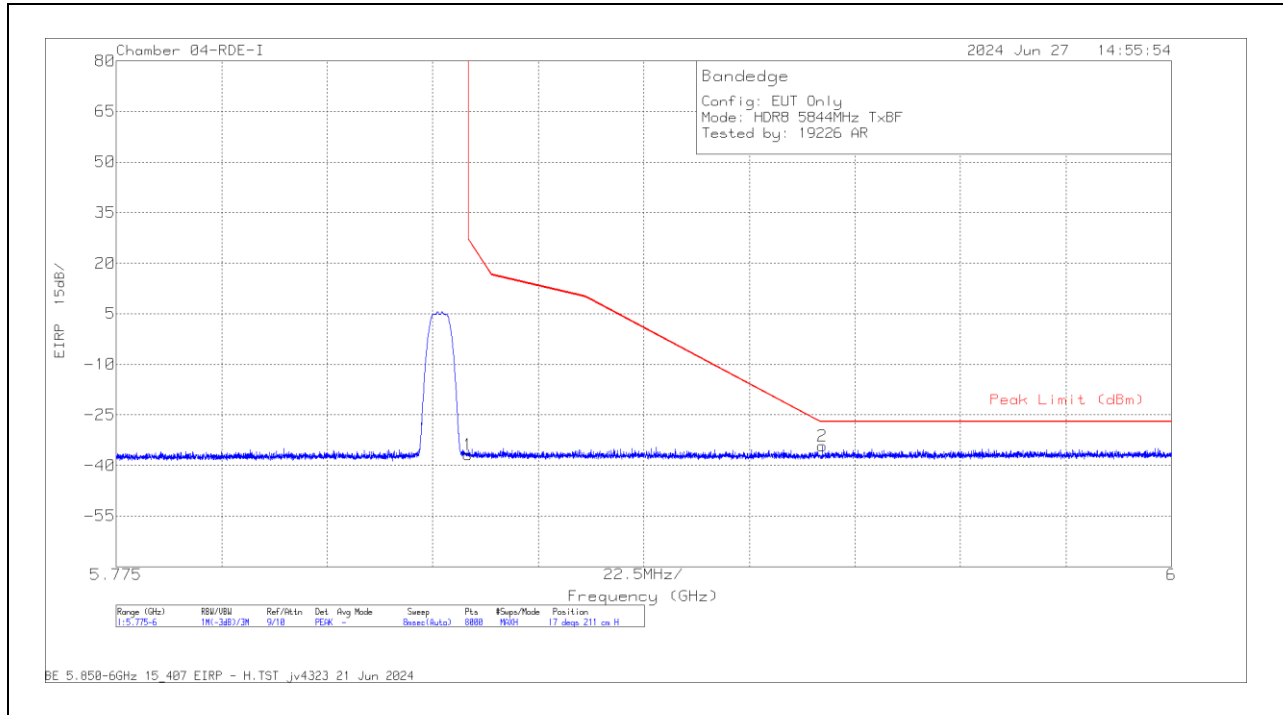

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.11	Pk	35	-15.5	11.8	-36.81	27	-63.81	17	211	H
2	5.925575	-65.66	PK	35.2	-15.5	11.8	-34.16	-27	-7.16	17	211	H

Pk - Peak detector

VERTICAL RESULT


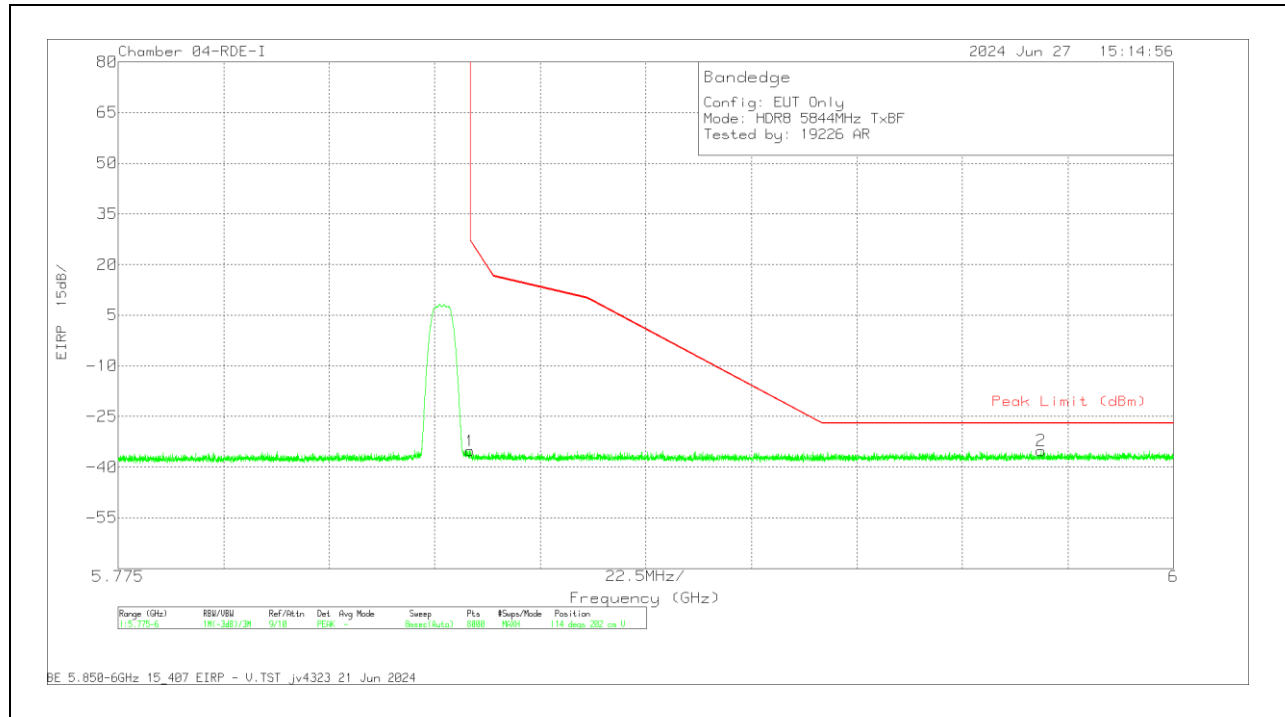


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.52	Pk	35	-15.5	11.8	-35.22	27	-62.22	114	202	V
2	5.971734	-66.59	Pk	35.3	-15.6	11.8	-35.09	-27	-8.09	114	202	V

Pk - Peak detector

10.1.22. HDR8 HIGH POWER, UNII-3 BAND, MIMO TXBF MODE, HARMONIC AND SPURIOUS

LOW CHANNEL, 5733MHZ

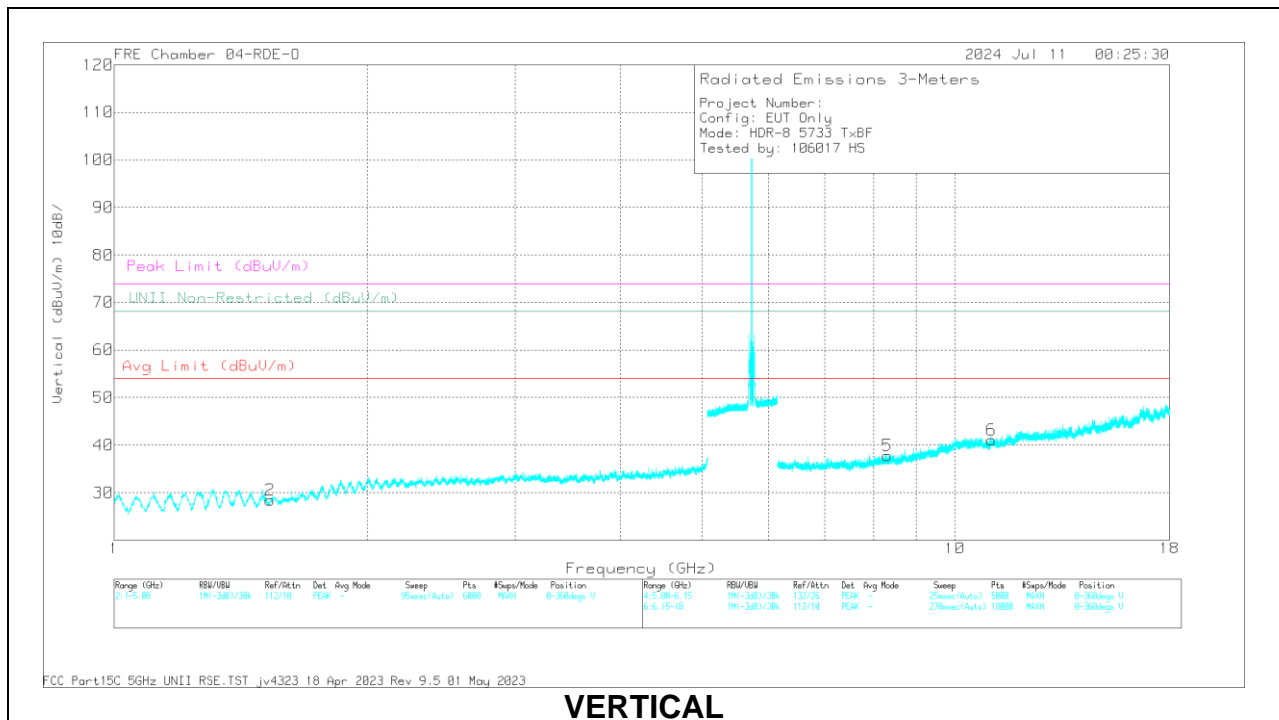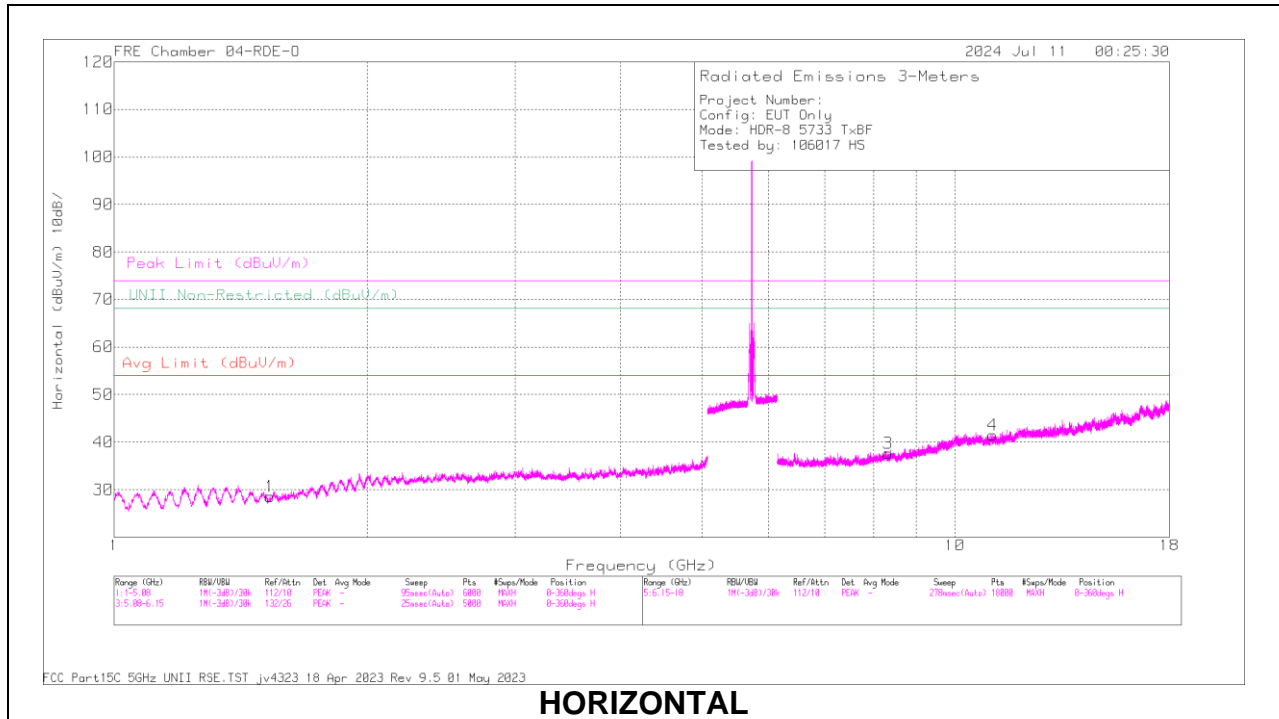


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.536931	56.93	PK-U	28.5	-46.49	0	38.94	-	-	74	-35.06	127	249	H
	* 1.535533	45.21	ADR	28.4	-46.4	0	27.21	54	-26.79	-	-	127	249	H
2	* 1.535238	56.62	PK-U	28.4	-46.4	0	38.62	-	-	74	-35.38	153	124	V
	* 1.534281	45.11	ADR	28.4	-46.4	0	27.11	54	-26.89	-	-	153	124	V
3	* 8.32883	52.35	PK-U	36.1	-41.1	0	47.35	-	-	74	-26.65	353	275	H
	* 8.329459	40.65	ADR	36.1	-41.15	0	35.6	54	-18.4	-	-	353	275	H
4	* 11.099947	52.73	PK-U	38.4	-39.99	0	51.14	-	-	74	-22.86	41	171	H
	* 11.098948	41.02	ADR	38.4	-39.9	0	39.52	54	-14.48	-	-	41	171	H
5	* 8.314552	52.54	PK-U	36.1	-40.94	0	47.7	-	-	74	-26.3	146	303	V
	* 8.313495	40.48	ADR	36.1	-40.95	0	35.63	54	-18.37	-	-	146	303	V
6	* 11.059309	53.15	PK-U	38.4	-39.7	0	51.85	-	-	74	-22.15	66	211	V
	* 11.058566	40.79	ADR	38.4	-39.7	0	39.49	54	-14.51	-	-	66	211	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL, 5788MHz

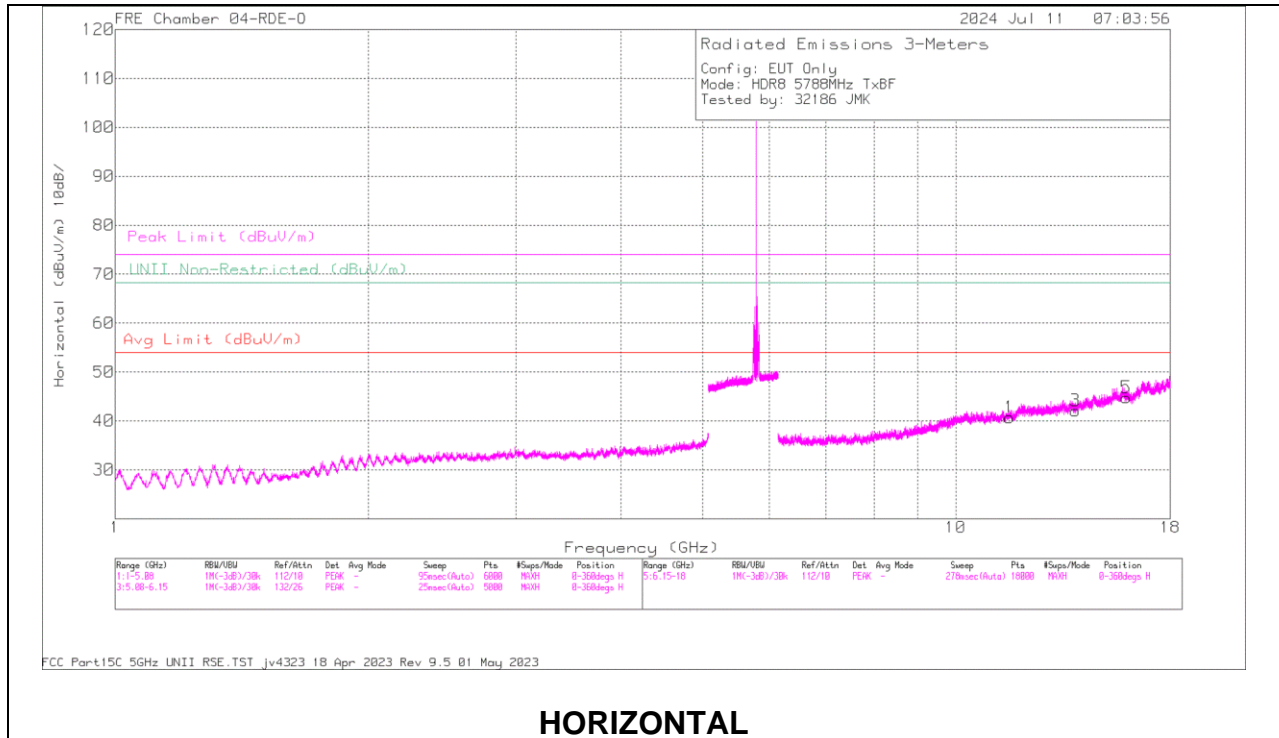

HORIZONTAL

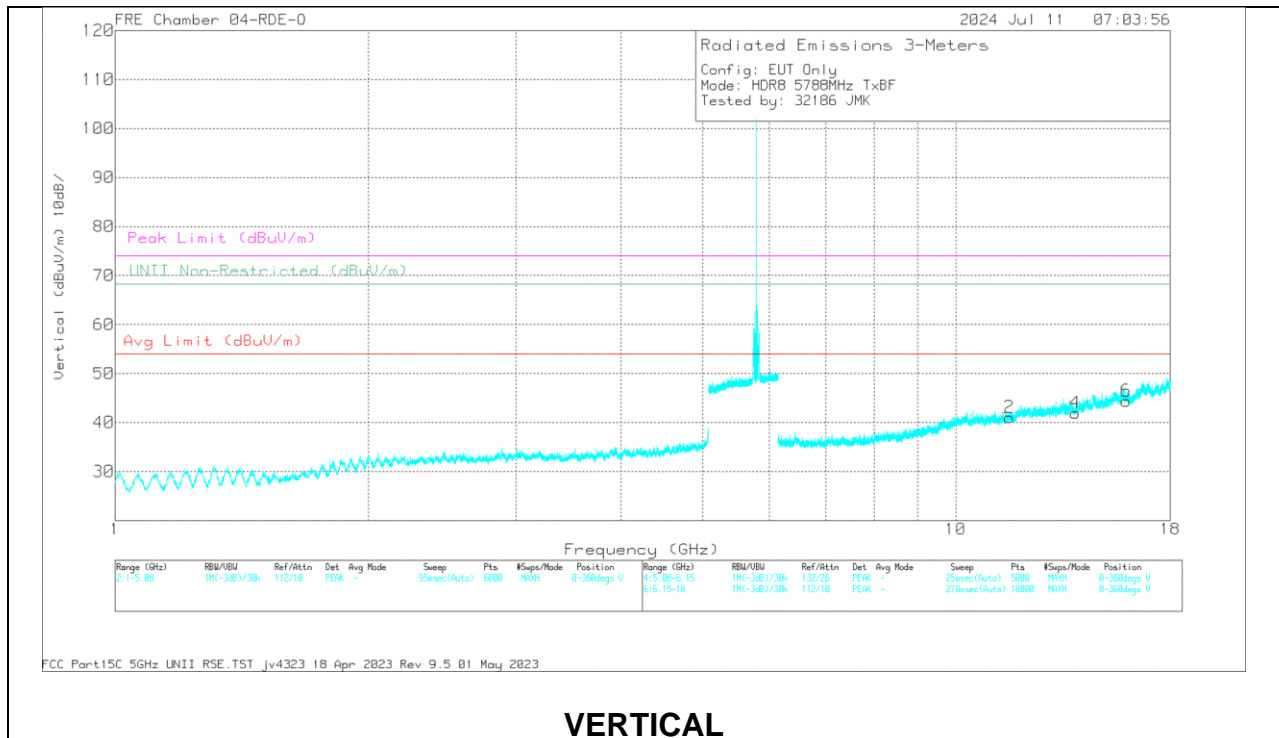


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.580058	52.88	PK-U	38.6	-39.7	51.78	-	-	74	-22.22	240	223	H
	* 11.582336	41.1	ADR	38.6	-39.6	40.1	54	-13.9	-	-	240	223	H
5	* 15.953118	53.16	PK-U	41.2	-38.69	55.67	-	-	74	-18.33	266	197	H
	* 15.954118	41.48	ADR	41.2	-38.59	44.09	54	-9.91	-	-	266	197	H
2	* 11.580871	52.84	PK-U	38.6	-39.7	51.74	-	-	74	-22.26	141	115	V
	* 11.583001	41.27	ADR	38.6	-39.6	40.27	54	-13.73	-	-	141	115	V
6	* 15.953666	52.78	PK-U	41.2	-38.63	55.35	-	-	74	-18.65	328	233	V
	* 15.951798	41.43	ADR	41.2	-38.72	43.91	54	-10.09	-	-	328	233	V
3	13.875815	53.18	PK-U	39.3	-39.12	53.36	-	-	68.2	-14.84	231	239	H
	13.876068	53	PK-U	39.3	-39.11	53.19	-	-	68.2	-15.01	348	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL, 5844MHz

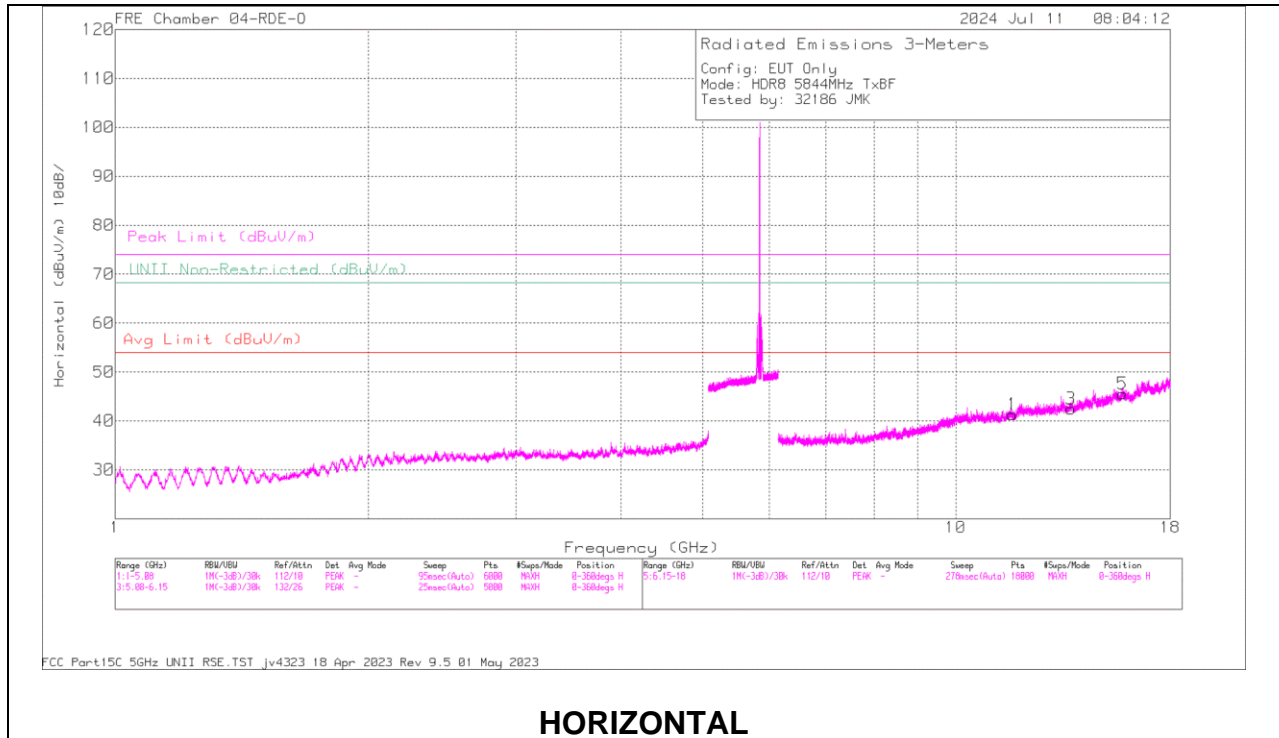

HORIZONTAL

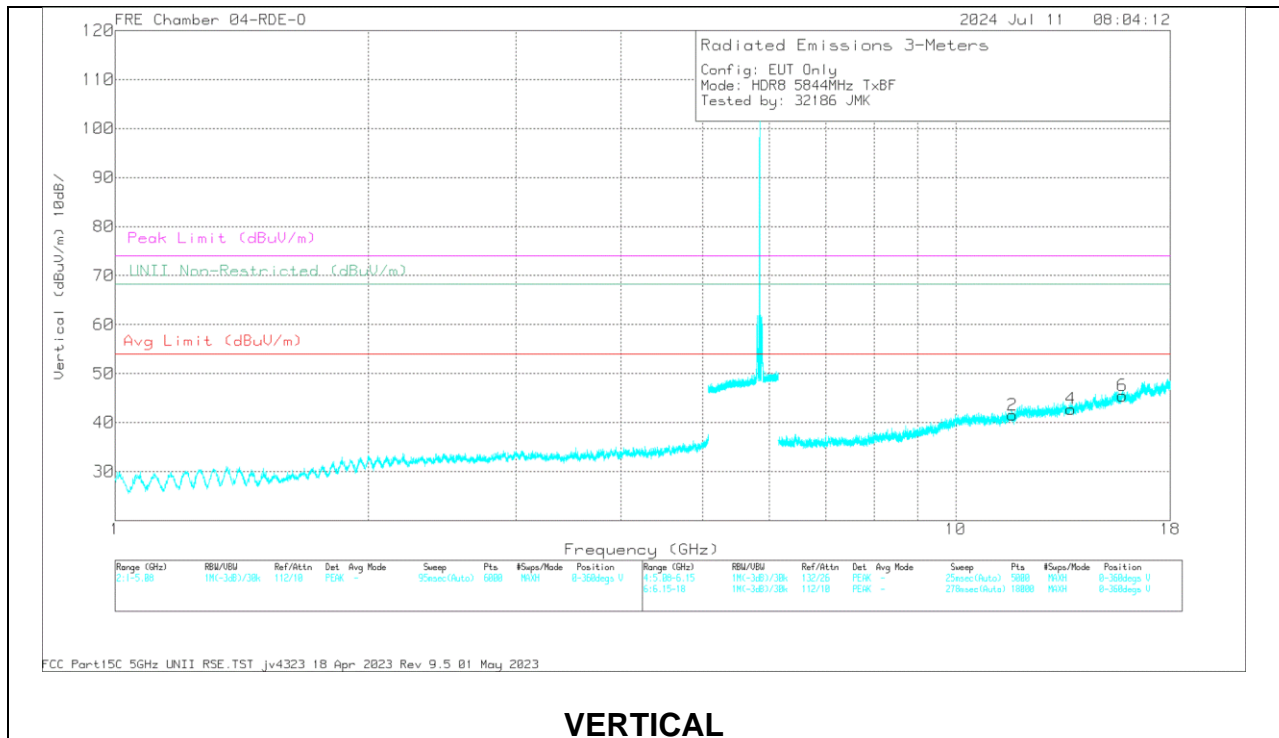

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80402 1m ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.683495	52.58	PK-U	38.8	-39.7	51.68	-	-	74	-22.32	150	109	H
	* 11.682133	41.09	ADR	38.8	-39.7	40.19	54	-13.81	-	-	150	109	H
5	* 15.789183	53.06	PK-U	41.2	-37.9	56.36	-	-	74	-17.64	184	139	H
	* 15.788464	41.26	ADR	41.2	-37.9	44.56	54	-9.44	-	-	184	139	H
2	* 11.679768	52.18	PK-U	38.8	-39.7	51.28	-	-	74	-22.72	316	179	V
	* 11.682606	41.08	ADR	38.8	-39.7	40.18	54	-13.82	-	-	316	179	V
6	* 15.79018	53.12	PK-U	41.2	-37.88	56.44	-	-	74	-17.56	217	224	V
	* 15.78834	41.17	ADR	41.2	-37.9	44.47	54	-9.53	-	-	217	224	V
3	13.70929	52.4	PK-U	39.2	-38.5	53.1	-	-	68.2	-15.1	242	247	H
	13.711494	52.41	PK-U	39.2	-38.65	52.96	-	-	68.2	-15.24	317	117	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

10.1.23. HDR8 LOW POWER, UNII-3 BAND, BANDEDGE

ANT 6, SISO MODE

LOW CHANNEL, 5733MHz

HORIZONTAL RESULT

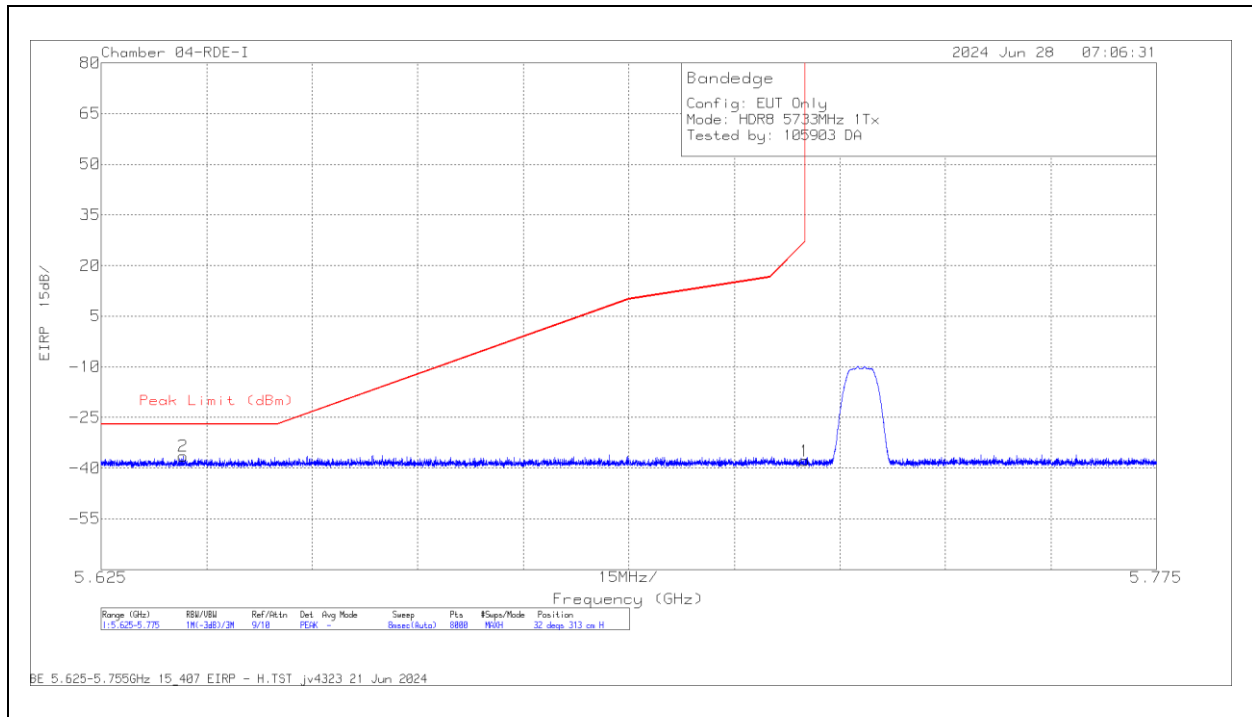

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	CBL AMP Pad(dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.636607	-66.5	Pk	34.9	-16.7	11.8	-36.5	-27	-9.5	32	313	H
1	5.725	-67.94	Pk	34.9	-16.6	11.8	-37.84	27	-64.84	32	313	H

Pk - Peak detector