

Test Laboratory: Compliance Certification Services

Right Hand Side - GSM

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 24.0deg. C; Liquid Temperature: 23.0 deg. C


- DASY4 Configuration:
- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
 - Probe: EX3DV3 - SN3531; ConvF(10.95, 10.95, 10.95); Calibrated: 4/23/2008
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: SAM 2; Type: SAM 2; Serial: 1050
 - Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

GSM Touch - M ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (measured) = 0.546 mW/g

GSM Touch - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 10.6 V/m; Power Drift = -0.123 dB
Peak SAR (extrapolated) = 0.714 W/kg
SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.350 mW/g
[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (measured) = 0.580 mW/g

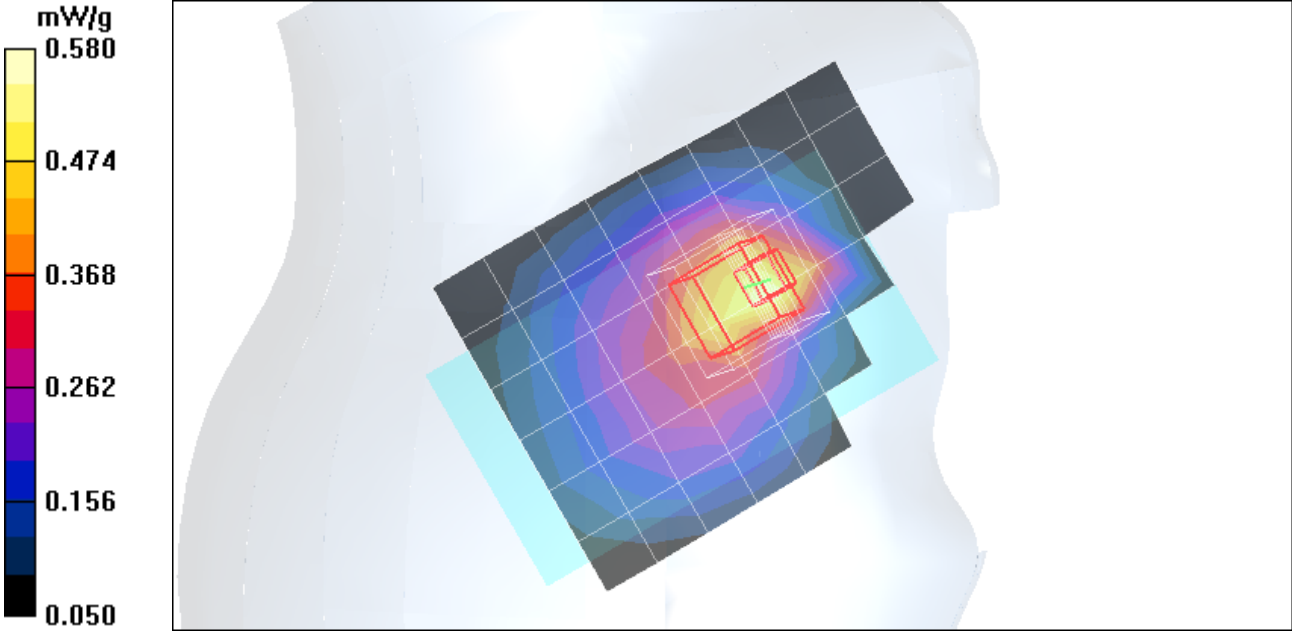

Test Laboratory: Compliance Certification Services

Right Hand Side - GSM

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.95, 10.95, 10.95); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

GSM Tilt - M ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.270 mW/g

GSM Tilt - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 17.4 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.209 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.293 mW/g

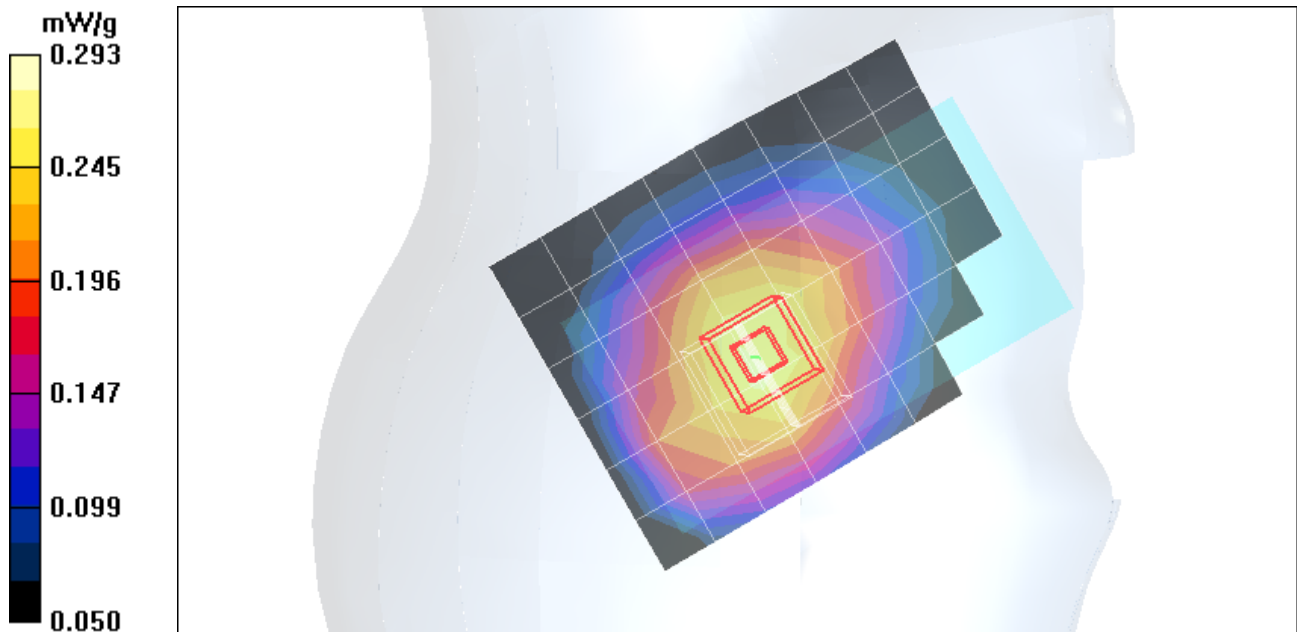

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 243.0deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.99, 8.99, 8.99); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

GSM Touch - L ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.41 mW/g

GSM Touch - L ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 32.2 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.785 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.42 mW/g

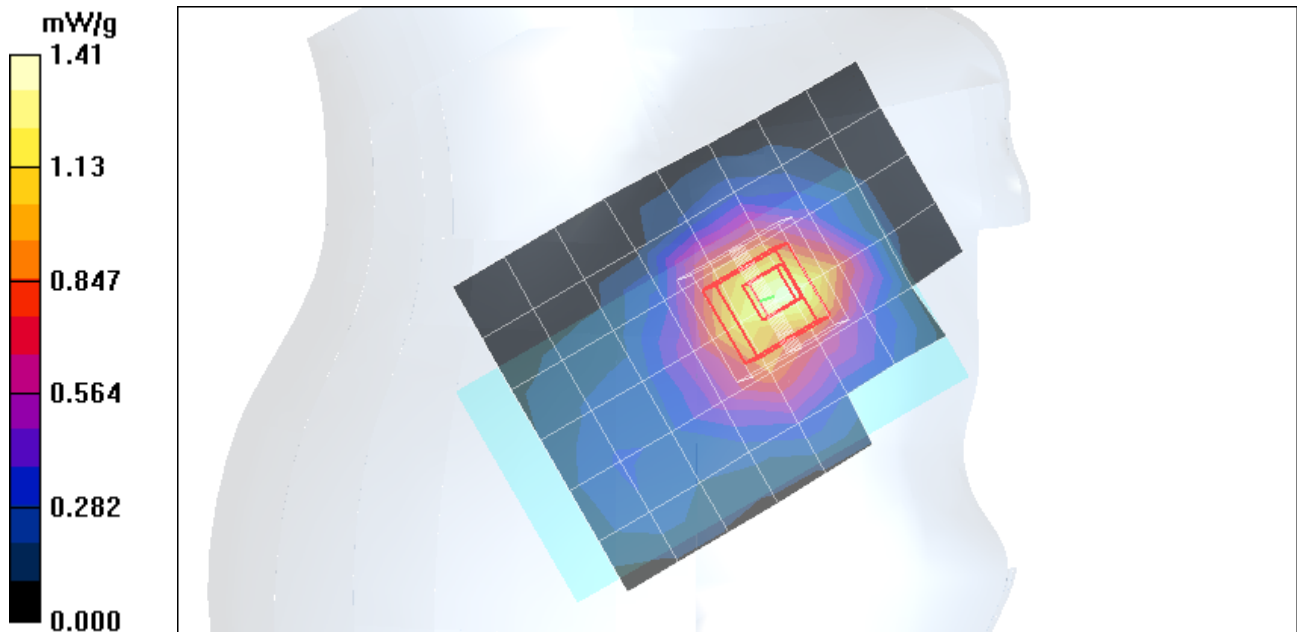

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Project Red; Type: Phone;Serial: 88819026Y7K

Communication System: PCS 1900;Frequency: 1880 MHz;Duty Cycle: 1:8
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

Room AmbientTemperature: 24.0deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.99, 8.99, 8.99); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

GSM Touch - M ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.42 mW/g


GSM Touch - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 32.0 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.794 mW/g

Maximum value of SAR (measured) = 1.45 mW/g

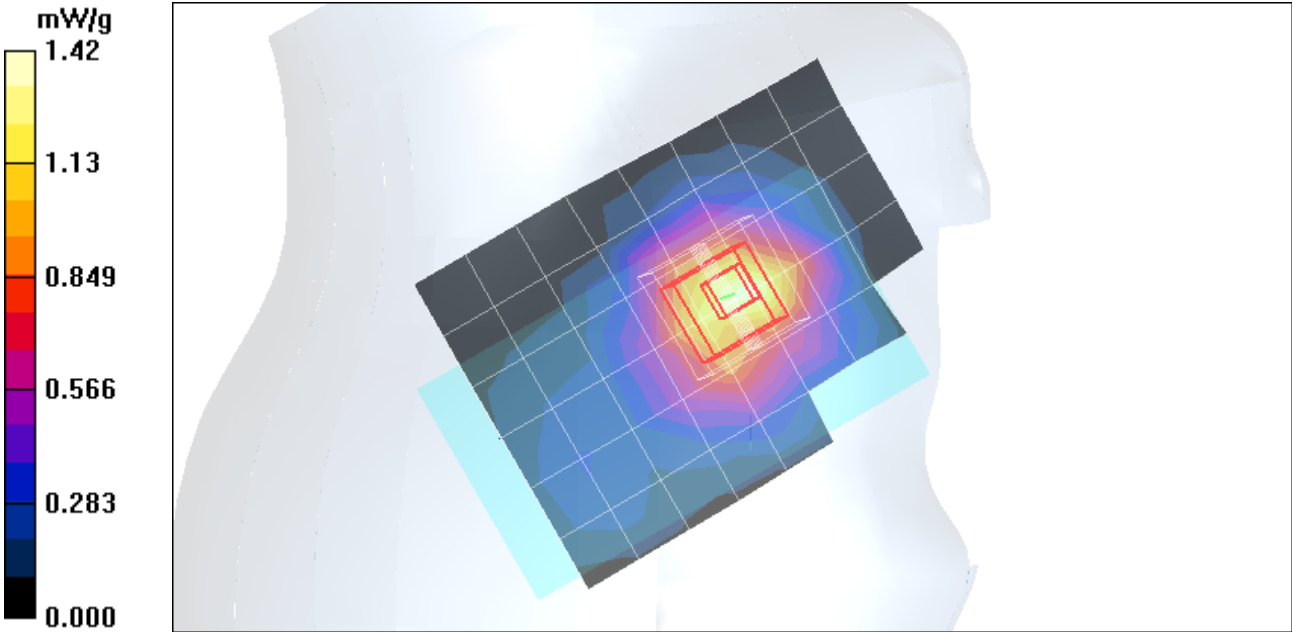

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.99, 8.99, 8.99); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

GSM Touch - H ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.46 mW/g

GSM Touch - H ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 25.3 V/m; Power Drift = 0.057 dB
Peak SAR (extrapolated) = 1.76 W/kg
SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.808 mW/g
Maximum value of SAR (measured) = 1.48 mW/g

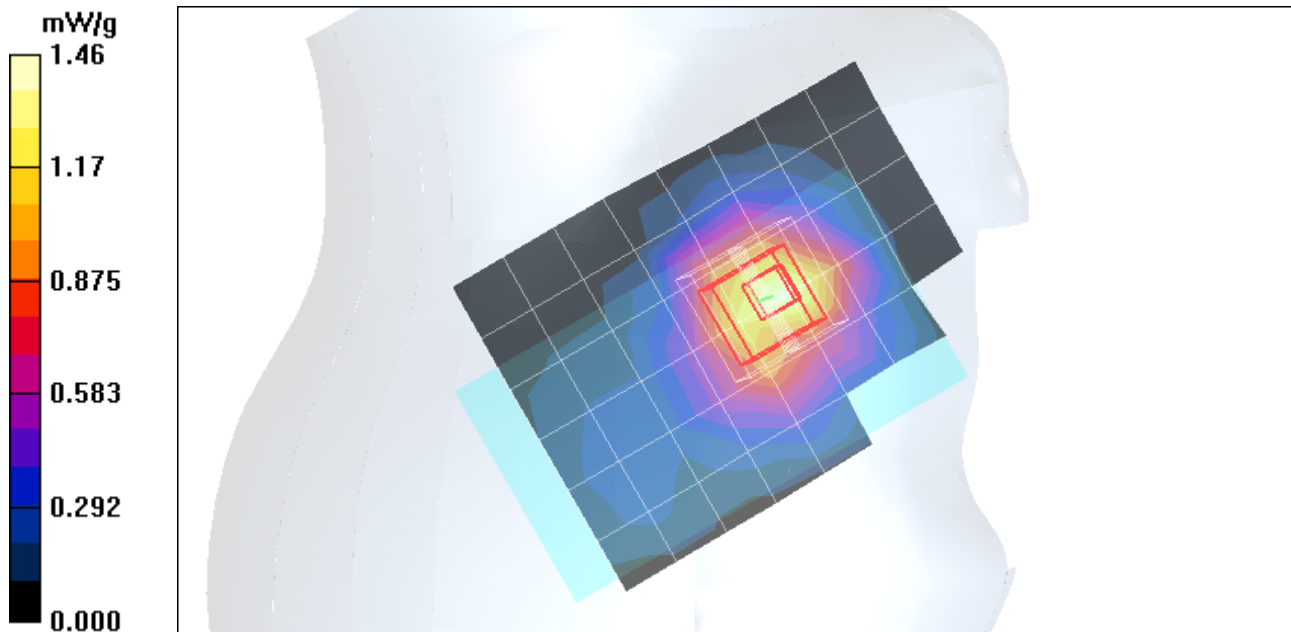

Test Laboratory: Compliance Certification Services

Right Hand Side - GSM

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
Phantom section: Right Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.99, 8.99, 8.99); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

GSM Tilt - M ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.416 mW/g

GSM Tilt - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 16.1 V/m; Power Drift = -0.042 dB
Peak SAR (extrapolated) = 0.538 W/kg
SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.221 mW/g
Maximum value of SAR (measured) = 0.422 mW/g

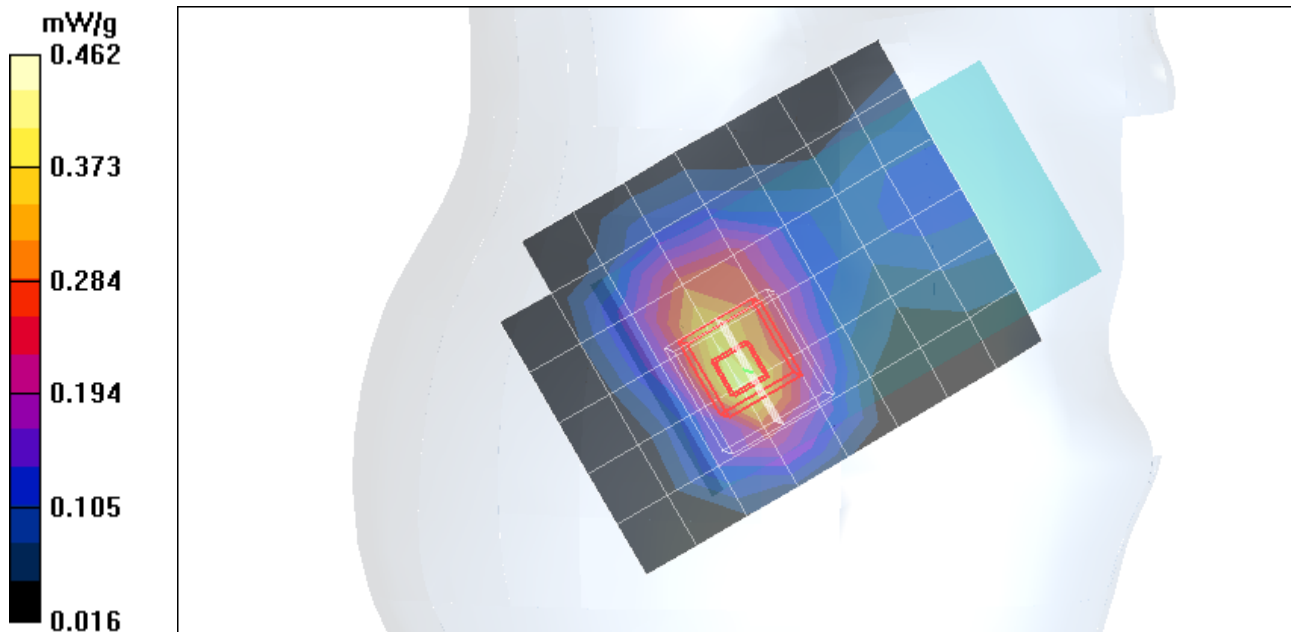

Test Laboratory: Compliance Certification Services

Right Hand Side - WCDMA

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.95, 10.95, 10.95); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

WCDMA Touch - M ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.544 mW/g

WCDMA Touch - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 20.1 V/m; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 0.697 W/kg

SAR(1 g) = 0.504 mW/g; SAR(10 g) = 0.356 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.583 mW/g

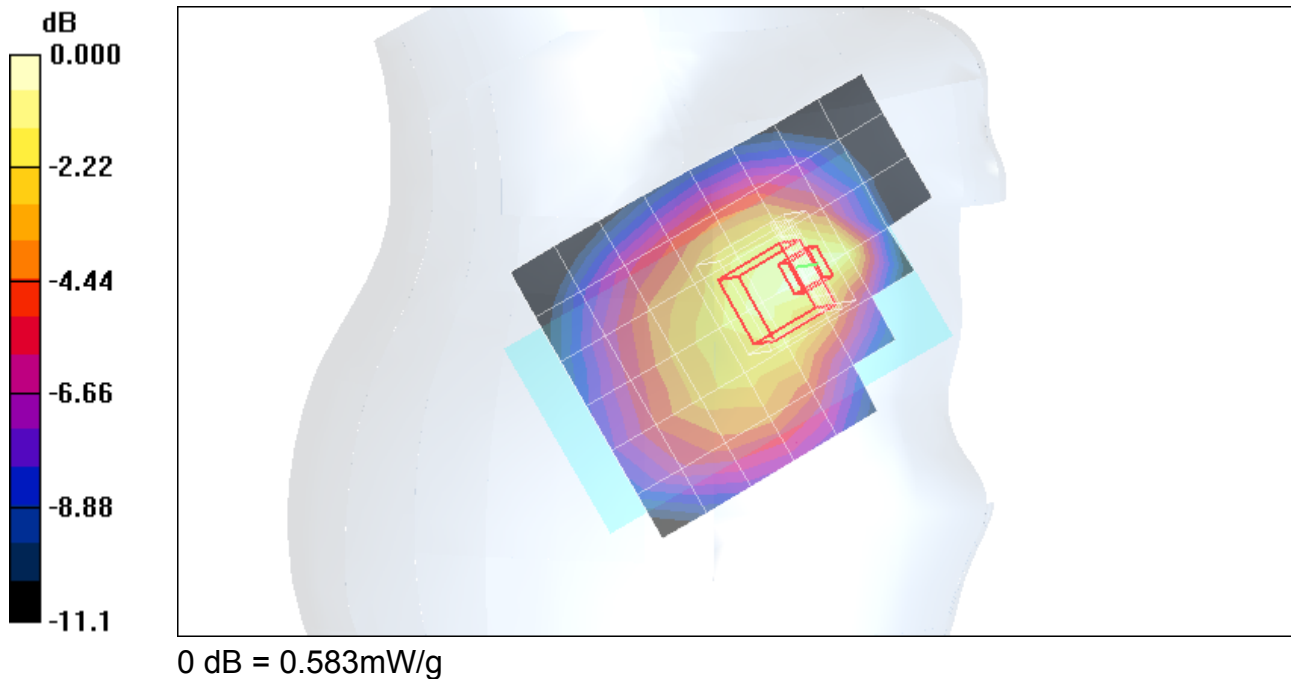

Test Laboratory: Compliance Certification Services

Right Hand Side - WCDMA

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.95, 10.95, 10.95); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

WCDMA Tilt - M ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.274 mW/g

WCDMA Tilt - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 14.2 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.183 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.256 mW/g

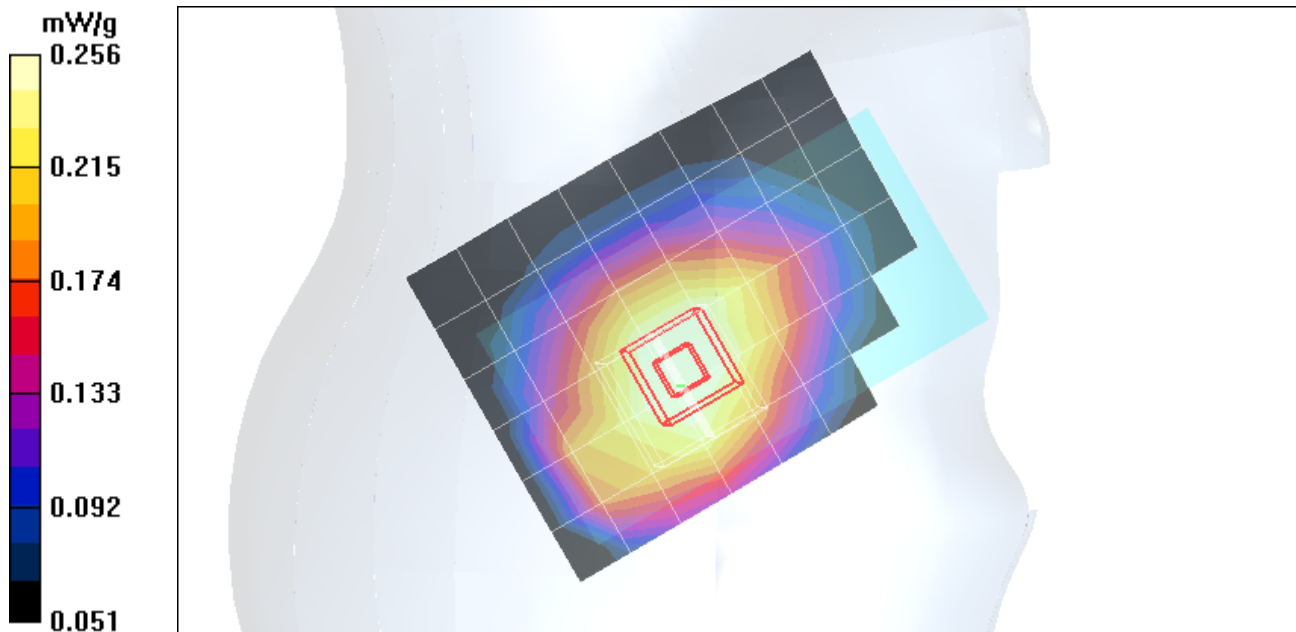

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: PCS 1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.99, 8.99, 8.99); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

WCDMA Touch - L ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.36 mW/g

WCDMA Touch - L ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 31.9 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.778 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.40 mW/g

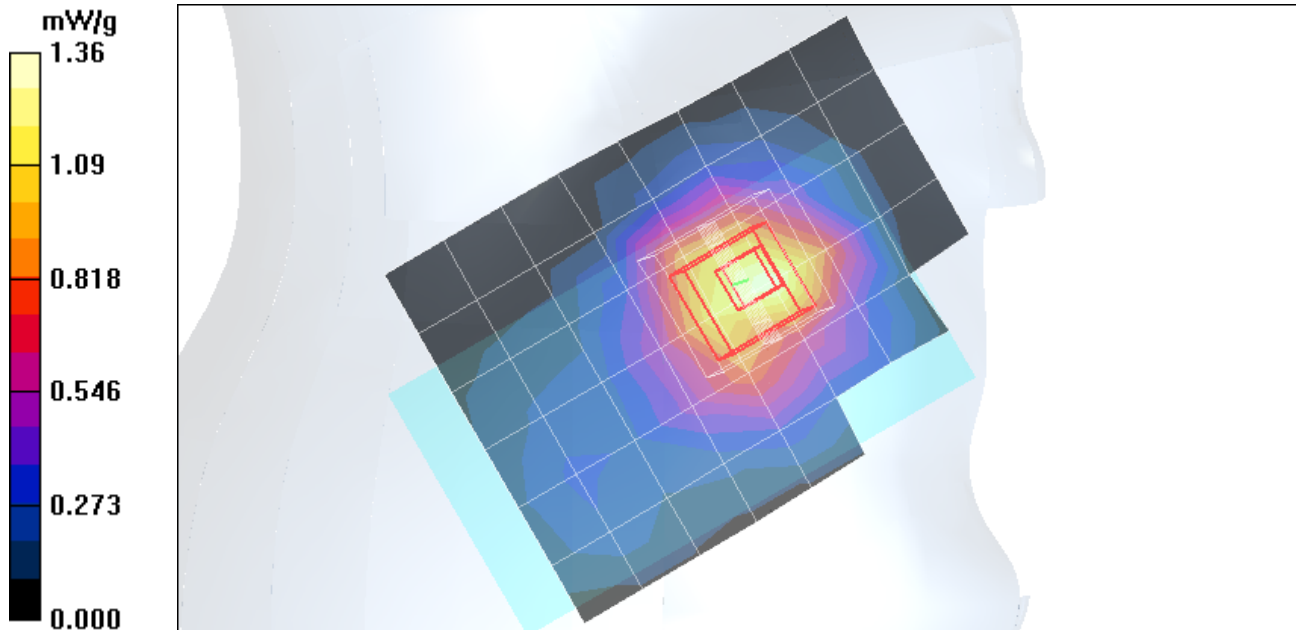

Test Laboratory: Compliance Certification Services

Right Hand Side - WCDMA

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.99, 8.99, 8.99); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

WCDMA Touch - M ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.44 mW/g


WCDMA Touch - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 25.2 V/m; Power Drift = 0.062 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.809 mW/g

Maximum value of SAR (measured) = 1.45 mW/g

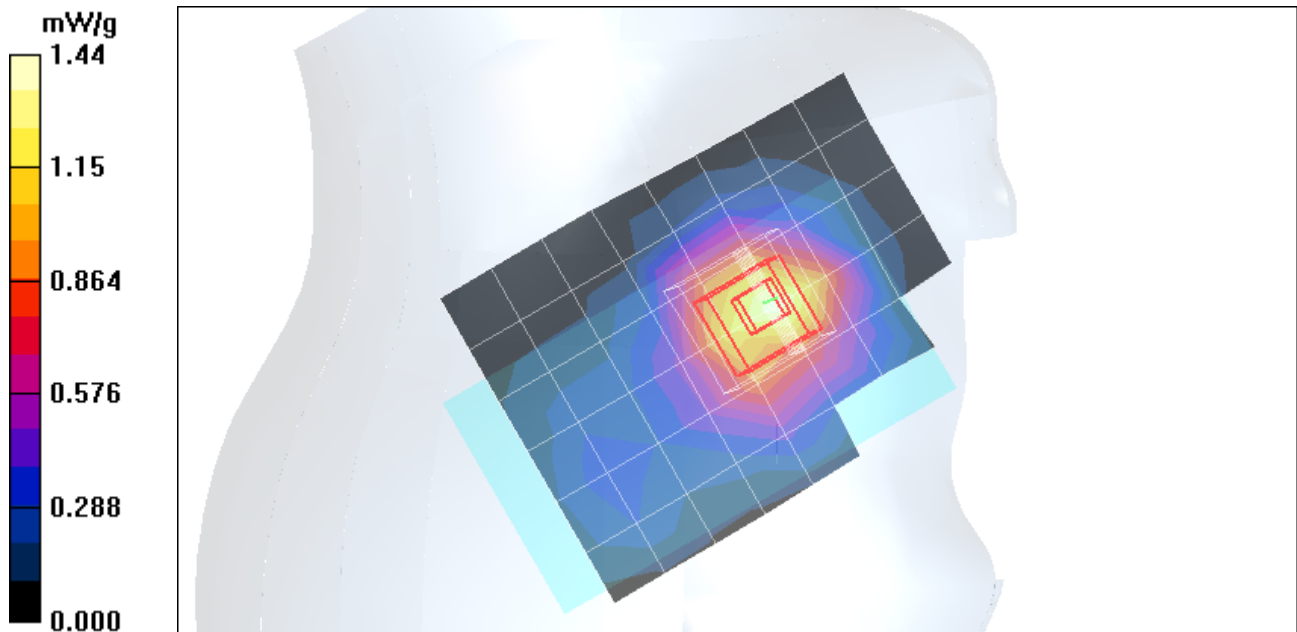

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: PCS 1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.99, 8.99, 8.99); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

WCDMA Touch - H ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.55 mW/g

WCDMA Touch - H ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 26.7 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 1.38 mW/g; SAR(10 g) = 0.870 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.59 mW/g

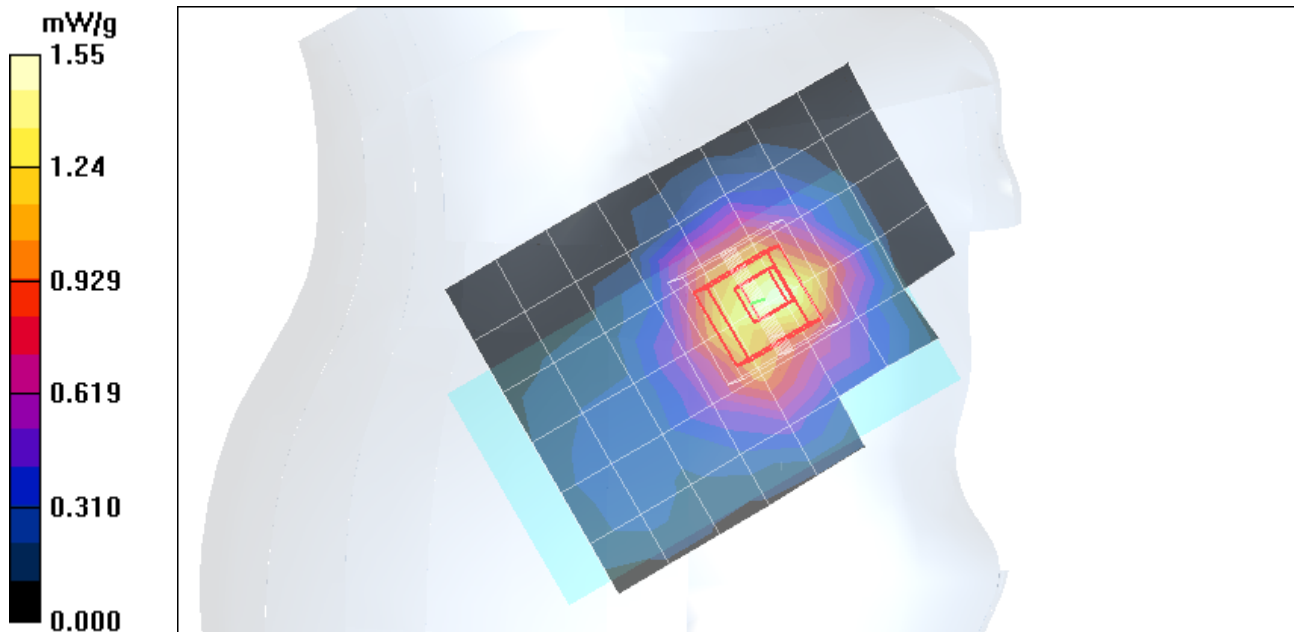

Test Laboratory: Compliance Certification Services

Right Hand Side - WCDMA


DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: PCS 1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1

WCDMA Touch - H ch/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.55 mW/g

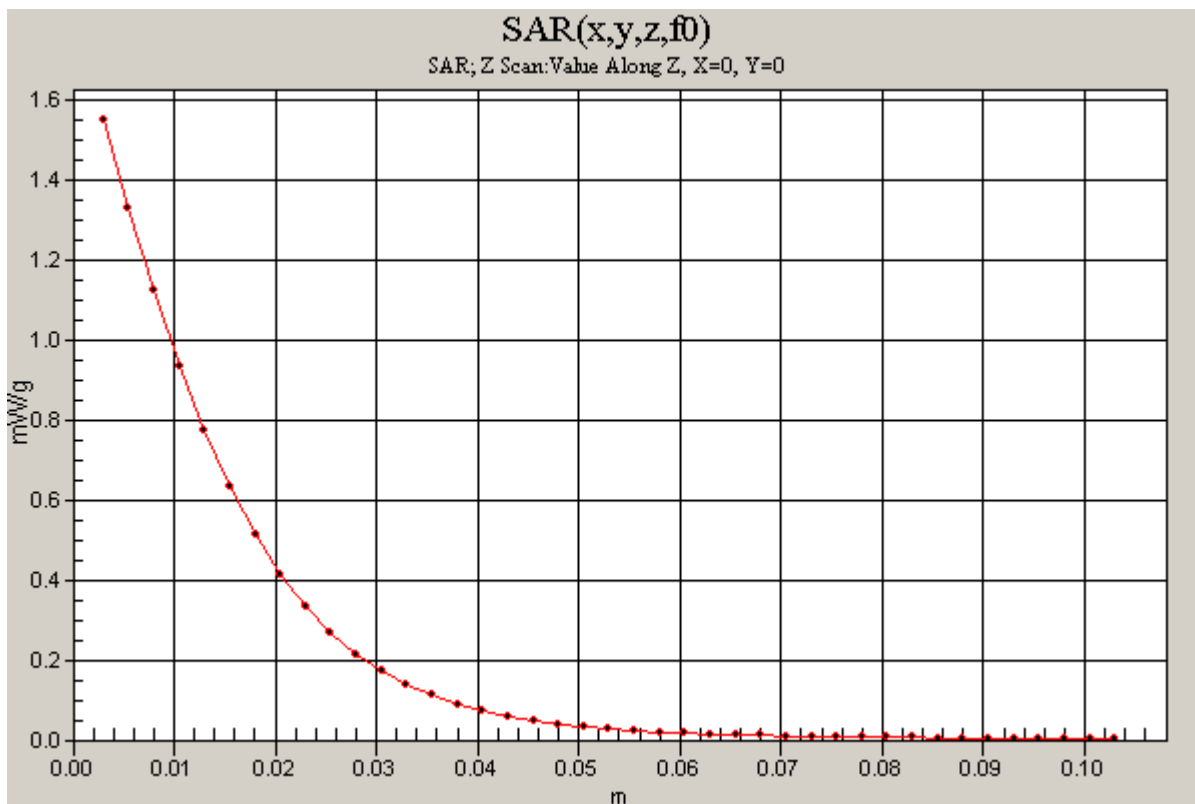

Test Laboratory: Compliance Certification Services

Right Hand Side - WCDMA

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.99, 8.99, 8.99); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

WCDMA Tilt - M ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.540 mW/g


WCDMA Tilt - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 18.1 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.276 mW/g

Maximum value of SAR (measured) = 0.519 mW/g

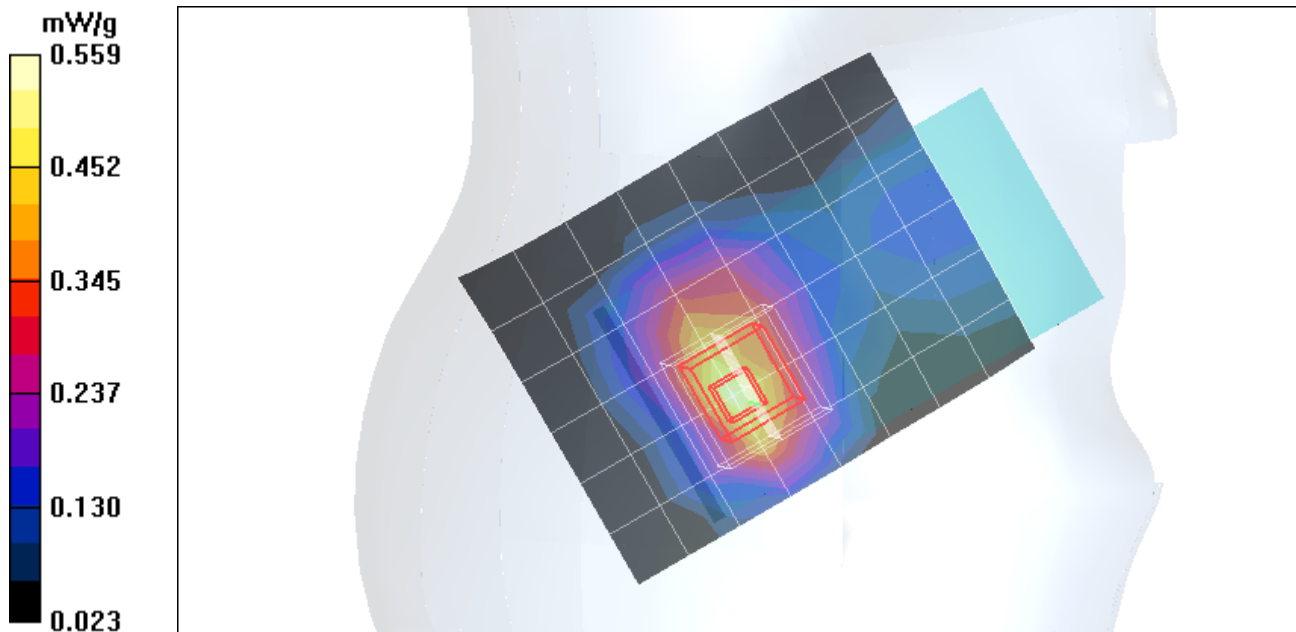

Test Laboratory: Compliance Certification Services

Right Hand Side - Flat section

DUT: Project Red; Type: Phone; Serial: 88819026Y7K

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.99, 8.99, 8.99); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

WCDMA Touch - M ch - Flat Section at 5mm/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.619 mW/g

WCDMA Touch - M ch - Flat Section at 5mm/Zoom Scan (7x7x9)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=3mm

Reference Value = 18.8 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.577 mW/g; SAR(10 g) = 0.344 mW/g

Maximum value of SAR (measured) = 0.686 mW/g

WCDMA Touch - M ch - Flat Section at 5mm/Zoom Scan (7x7x9)/Cube 1: Measurement grid:

dx=5mm, dy=5mm, dz=3mm

Reference Value = 18.8 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.553 mW/g; SAR(10 g) = 0.344 mW/g

Maximum value of SAR (measured) = 0.647 mW/g

