



# FCC Test Report

## FCC Part 22, 24

Model #: A1303  
FCC ID: BCGA1303B

Apple Inc.  
1 Infinite Loop Mail Stop26A  
Cupertino, California 95014  
U.S.A

TEST REPORT #: EMC\_APPLE\_047\_09001\_FCC22\_24\_BCGA1303B  
DATE: 2009-05-27



FCC listed:  
A2LA accredited  
IC recognized #  
3462B

### **CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: +1 (408) 586 6200 • Fax: +1 (408) 586 6299 • E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

## Table of Contents

<b>1</b>	<b>ASSESSMENT .....</b>	<b>4</b>
<b>2</b>	<b>ADMINISTRATIVE DATA.....</b>	<b>5</b>
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT.....	5
2.2	IDENTIFICATION OF THE CLIENT .....	5
2.3	IDENTIFICATION OF THE MANUFACTURER.....	5
<b>3</b>	<b>EQUIPMENT UNDER TEST (EUT).....</b>	<b>6</b>
3.1	SPECIFICATION OF THE EQUIPMENT UNDER TEST .....	6
3.2	IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT) .....	7
3.3	IDENTIFICATION OF ACCESSORY EQUIPMENT .....	7
<b>4</b>	<b>SUBJECT OF INVESTIGATION.....</b>	<b>8</b>
<b>5</b>	<b>MEASUREMENTS.....</b>	<b>9</b>
5.1	RF POWER OUTPUT .....	9
5.1.1	<i>FCC 2.1046 Measurements required: RF power output.....</i>	<i>9</i>
5.1.2	<i>Limits: .....</i>	<i>9</i>
5.1.2.1	<i>FCC 22.913 (a) Effective radiated power limits. ....</i>	<i>9</i>
5.1.2.2	<i>FCC 24.232 (b)(c) Power limits. ....</i>	<i>9</i>
5.1.3	<i>Conducted Output Power Measurement procedure:.....</i>	<i>9</i>
5.1.4	<i>Radiated Output Power Measurement procedure:.....</i>	<i>10</i>
5.1.5	<i>Conducted Peak Power 850MHz band .....</i>	<i>11</i>
5.1.6	<i>Conducted Peak Power 1900 MHz band .....</i>	<i>11</i>
5.1.7	<i>ERP Results 850MHz band: .....</i>	<i>12</i>
5.1.8	<i>EIRP Results 1900 MHz band:.....</i>	<i>12</i>
5.2	OCCUPIED BANDWIDTH/EMISSION BANDWIDTH .....	49
5.2.1	<i>FCC 2.1049 Measurements required: Occupied bandwidth.....</i>	<i>49</i>
5.2.2	<i>Occupied / emission bandwidth measurement procedure:.....</i>	<i>49</i>
5.2.3	<i>Occupied bandwidth results 850 MHz band. ....</i>	<i>50</i>
5.2.4	<i>Occupied bandwidth results 1900 MHz band: .....</i>	<i>50</i>
5.2.5	<i>Emission bandwidth results 850 MHz band. ....</i>	<i>51</i>
5.2.6	<i>Emission bandwidth results 1900 MHz band:.....</i>	<i>51</i>
5.3	FREQUENCY STABILITY.....	88
5.3.1	<i>Limit .....</i>	<i>88</i>
5.3.2	<i>Test Results Frequency Stability (GSM-850).....</i>	<i>89</i>
5.3.3	<i>Test Results Frequency Stability (GSM-1900).....</i>	<i>90</i>
5.3.4	<i>Test Results Frequency Stability (UMTS FDD5).....</i>	<i>91</i>
5.3.5	<i>Test Results Frequency Stability (UMTS FDD2).....</i>	<i>92</i>
5.4	SPURIOUS EMISSIONS CONDUCTED.....	93
5.4.1	<i>FCC 2.1051 Measurements required: Spurious emissions at antenna terminals. ....</i>	<i>93</i>
5.4.2	<i>Limits: .....</i>	<i>93</i>
5.4.2.1	<i>FCC 22.917 Emission limitations for cellular equipment. ....</i>	<i>93</i>
5.4.2.2	<i>FCC 24.238 Emission limitations for Broadband PCS equipment. ....</i>	<i>93</i>
5.4.3	<i>Conducted out of band emissions measurement procedure:.....</i>	<i>94</i>
5.4.4	<i>Test Results: Conducted Out of band Emission: .....</i>	<i>94</i>
5.5	SPURIOUS EMISSIONS RADIATED .....	119
5.5.1	<i>FCC 2.1053 Measurements required: Field strength of spurious radiation.....</i>	<i>119</i>

5.5.2	<i>Limits:</i> .....	119
5.5.2.1	FCC 22.917 Emission limitations for cellular equipment. ....	119
5.5.2.2	FCC 24.238 Emission limitations for Broadband PCS equipment. ....	119
5.5.3	<i>Radiated out of band measurement procedure:</i> .....	120
5.5.4	<i>Radiated out of band emissions results on EUT:</i> .....	122
5.5.4.1	Test Results Transmitter Spurious Emission GSM850: .....	122
5.5.4.2	Test Results Transmitter Spurious Emission UMTS FDD5 .....	128
5.5.4.3	Test Results Transmitter Spurious Emission PCS-1900: .....	137
5.5.4.4	Test Results Transmitter Spurious Emission UMTS FDD2: .....	143
5.5.5	<i>RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 &amp; 133</i> .....	153
5.5.5.1	Test Results Receiver Spurious Emission GSM850 .....	154
5.5.5.2	Test Results Receiver Spurious Emission UMTS FDD5 .....	157
5.5.5.3	Test Results Receiver Spurious Emission GSM1900 .....	160
5.5.5.4	Test Results Receiver Spurious Emission UMTS FDD2 .....	163
5.6	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207.....	166
5.6.1	<i>Limits</i> .....	166
<b>6</b>	<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS</b> .....	<b>175</b>
<b>7</b>	<b>REFERENCES</b> .....	<b>176</b>
<b>8</b>	<b>BLOCK DIAGRAMS</b> .....	<b>177</b>

## 1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations.

Company	Description	Model #
Apple Inc.	This device is a GSM and WCDMA smart handset with WiFi, Bluetooth +EDR and iPod and application functions	A1303

Technical responsibility for area of testing:

**Heiko Strehlow**  
(Director Antenna & Regulatory  
Services)

2009-05-27 EMC & Radio

---

Date	Section	Name	Signature
------	---------	------	-----------

This report is prepared by:

**Marc Douat**  
(Test Lab Manager)

2009-05-27 EMC & Radio

---

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID.

## **2 Administrative Data**

### **2.1 Identification of the Testing Laboratory Issuing the EMC Test Report**

Company Name:	<b>CETECOM Inc.</b>
Department:	<b>EMC</b>
Address:	<b>411 Dixon Landing Road Milpitas, CA 95035 U.S.A.</b>
Telephone:	<b>+1 (408) 586 6200</b>
Fax:	<b>+1 (408) 586 6299</b>
Responsible Test Lab Manager:	<b>Heiko Strehlow</b>
Responsible Project Leader:	<b>Marc Douat</b>
Date of test:	<b>2009-04-21 to 2009-04-24</b>

### **2.2 Identification of the Client**

Applicant's Name:	<b>Apple Inc.</b>
Address Line 1:	<b>1 Infinite Loop</b>
Address Line 2:	<b>Mail Stop 26A</b>
City/ Zip Code	<b>Cupertino, California 95014</b>
Country:	<b>USA</b>
Contact Person:	<b>Robert Steinfeld</b>
Phone No.:	<b>408-974-2618</b>
Fax:	<b>408-862-5061</b>
e-mail:	<b>steinfel@apple.com</b>

### **2.3 Identification of the Manufacturer**

**Same as above applicant**

### 3 Equipment under Test (EUT)

#### 3.1 Specification of the Equipment under Test

Marketing Name of EUT (if not same as Model No.)	iPhone 3G
Model No.	A1303
FCC-ID	BCGA1303B
Frequency Range:	824.2MHz – 848.8MHz for GSM 850 1850.2MHz – 1909.8MHz for PCS 1900 826.4MHz – 846.6MHz for UMTS FDD5 1852.4MHz – 1907.6MHz for UMTS FDD2
Type(s) of Modulation:	GMSK, 8PSK, QPSK
Number of Channels:	GSM: 124 for GSM-850, 299 for PCS-1900 UMTS: Depends on service.
Antenna Type/gain:	PIFA
Max. Output Power:	Conducted GSM850 GMSK: 32.69dBm, 1858mW Conducted GSM850 8PSK: 30.60dBm, 1148mW Conducted UMTS FDD5: 28.42dBm, 695.02mW Conducted GSM1900 GMSK: 30.60dBm, 1148mW Conducted GSM1900 8PSK: 30.55dBm, 1135mW Conducted UMTS FDD2: 25.06dBm, 320.63mW Radiated GSM850 GMSK:30.96dBm, 1247.38mW Radiated GSM850 8PSK; 28.7dBm, 741.31mW Radiated UMTS FDD5: 25.37dBm, 344.35mW Radiated GSM1900 GMSK: 28.6dBm, 724.44mW Radiated GSM1900 8PSK: 26.16dBm, 413.05mW Radiated UMTS FDD2: 25.85dBm, 255.86mW

### 3.2 Identification of the Equipment Under Test (EUT)

EUT #	TYPE	MANF.	MODEL
1	Radiated Sample	Apple Inc.	A1303
2	Conducted Sample	Apple Inc.	A1303

### 3.3 Identification of Accessory equipment

AE #	TYPE	MANF.	MODEL
1	AC/DC ADAPTER	Flextronics	A1265

#### **4 Subject of Investigation**

All testing was performed on the EUT listed in Section 3. The EUT was maximized in the X,Y, Z positions , all data in this report shows the worst case between horizontal and vertical polarization for above 1GHz.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations.



## 5 Measurements

### 5.1 RF Power Output

#### 5.1.1 FCC 2.1046 Measurements required: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

#### 5.1.2 Limits:

##### 5.1.2.1 FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

##### 5.1.2.2 FCC 24.232 (b)(c) Power limits.


(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

#### 5.1.3 Conducted Output Power Measurement procedure:

Based on TIA-603C 2004

##### 2.2.1 Conducted Carrier Output Power Rating




1. Connect the equipment as shown in the above diagram. A Digital Radiocommunication Tester (DRT) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the DRT to set the EUT to its maximum power at the required channel.
3. Record the output power level measured by the DRT.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

#### 5.1.4 Radiated Output Power Measurement procedure:

Based on TIA-603C 2004

#### 2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

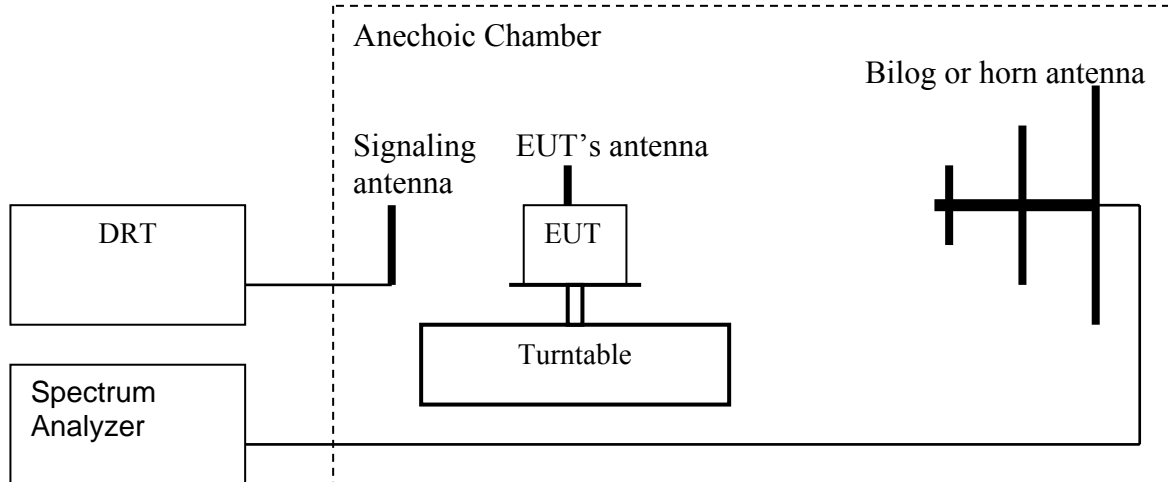

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
  2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
  3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
  4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
  5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
  6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
  7. Determine the ERP using the following equation:  

$$\mathbf{ERP\ (dBm) = LVL\ (dBm) + LOSS\ (dB)}$$
  8. Determine the EIRP using the following equation:  

$$\mathbf{EIRP\ (dBm) = ERP\ (dBm) + 2.14\ (dB)}$$
  9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band. **Spectrum analyzer settings = rbw=vbw=3MHz**
- (note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)

### 5.1.5 Conducted Peak Power 850MHz band

Frequency (MHz)	Conducted Peak Power (dBm)					
	GSM (GMSK)			EGPRS (8PSK)		
	Peak	Average	Peak to Average ratio(dB)	Peak	Average	Peak to Average ratio(dB)
824.2	32.69	32.53	0.16	30.60	27.62	2.98
836.6	32.64	32.45	0.19	30.54	27.56	2.98
848.8	32.51	32.42	0.09	30.45	27.53	2.92

Frequency (MHz)	Conducted Peak Power (dBm)	
	UMTS FDD5	
	Peak	Average
836.4	28.42	25.40
836.6	27.93	25.14
846.6	28.42	25.36

### 5.1.6 Conducted Peak Power 1900 MHz band

Frequency (MHz)	Conducted Peak Power (dBm)					
	GSM (GMSK)			EGPRS (8PSK)		
	Peak	Average	Peak to Average ratio(dB)	Peak	Average	Peak to Average ratio(dB)
1850.2	30.60	30.42	0.18	30.55	24.87	5.68
1880.0	30.58	30.39	0.19	30.55	24.87	5.68
1909.8	30.28	30.07	0.21	30.28	24.91	5.37

Frequency (MHz)	Conducted Peak Power (dBm)	
	UMTS FDD2	
	Peak	Average
1852.4	25.06	21.58
1880	25.06	21.70
1907.6	24.20	20.73

**5.1.7 ERP Results 850MHz band:**

Power Control Level	Burst Peak ERP
5	≤38.45dBm (7W)

Frequency (MHz)	Effective Radiated Power (dBm)	
	GSM (GMSK)	EGPRS (8PSK)
824.2	28.91	26.42
836.6	30.96	27.9
848.8	30.91	28.7

Frequency (MHz)	Effective Radiated Power (dBm)
	UMTS FDD5
836.4	24.3
836.6	24.68
846.6	25.37


**5.1.8 EIRP Results 1900 MHz band:**

Power Control Level	Burst Peak EIRP
0	≤33dBm (2W)

Frequency (MHz)	Effective Isotropic Radiated Power (dBm)	
	GSM (GMSK)	EGPRS (8PSK)
1850.2	28.4	25.62
1880.0	28.6	26.16
1909.8	28.4	25.37


Frequency (MHz)	Effective Isotropic Radiated Power (dBm)
	UMTS FDD2
1852.4	23.35
1880	24.08
1907.6	24

### CONDUCTED PEAK POWER (GSM 850) CHANNEL 128 §22.913(a)

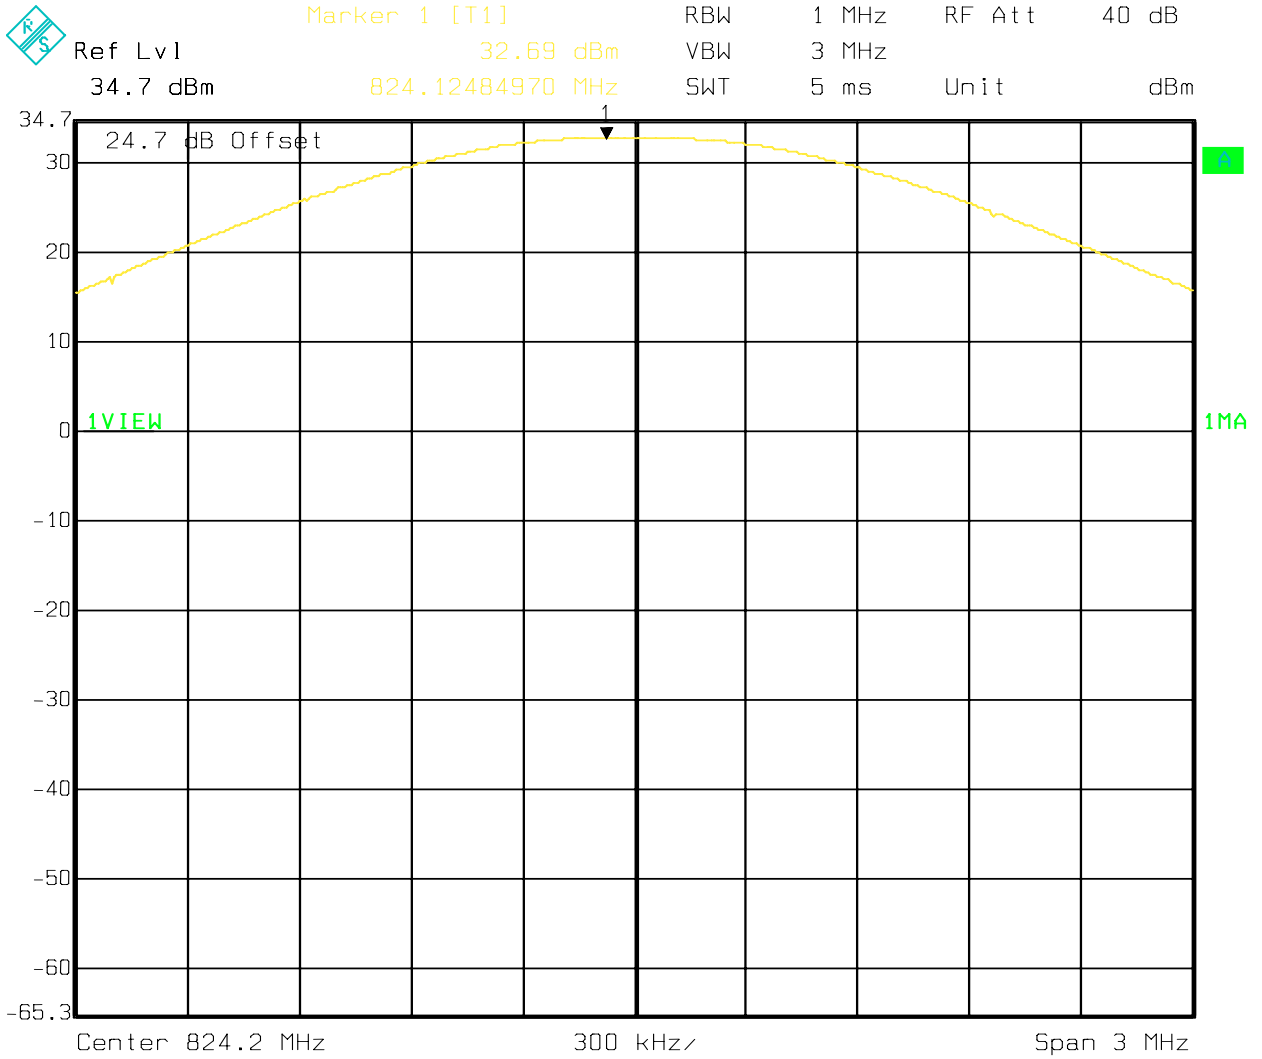

Date: 11.MAY 2009 09:46:10


**CONDUCTED PEAK POWER (GSM 850) CHANNEL 190 §22.913(a)**

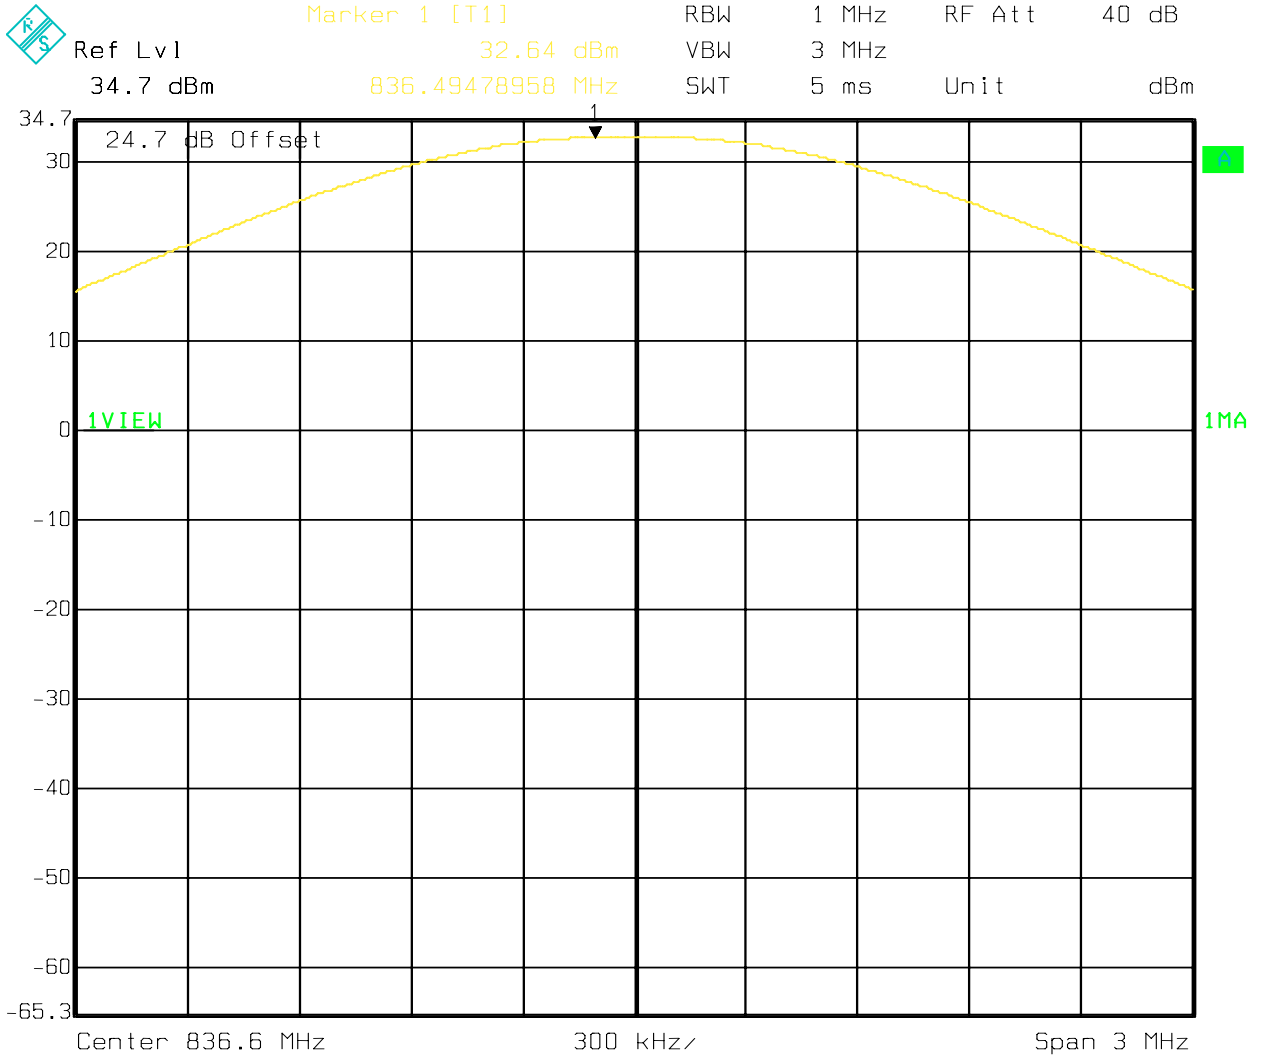

Date: 11.MAY 2009 09:44:07

**CONDUCTED PEAK POWER (GSM 850) CHANNEL 251 §22.913(a)**

◆ Ref Lvl 34.7 dBm      Marker 1 [T1] 32.51 dBm      RBW 1 MHz      RF Att 40 dB  
34.7 dBm      848.81503006 MHz      VBW 3 MHz      Unit dBm  
SWT 5 ms

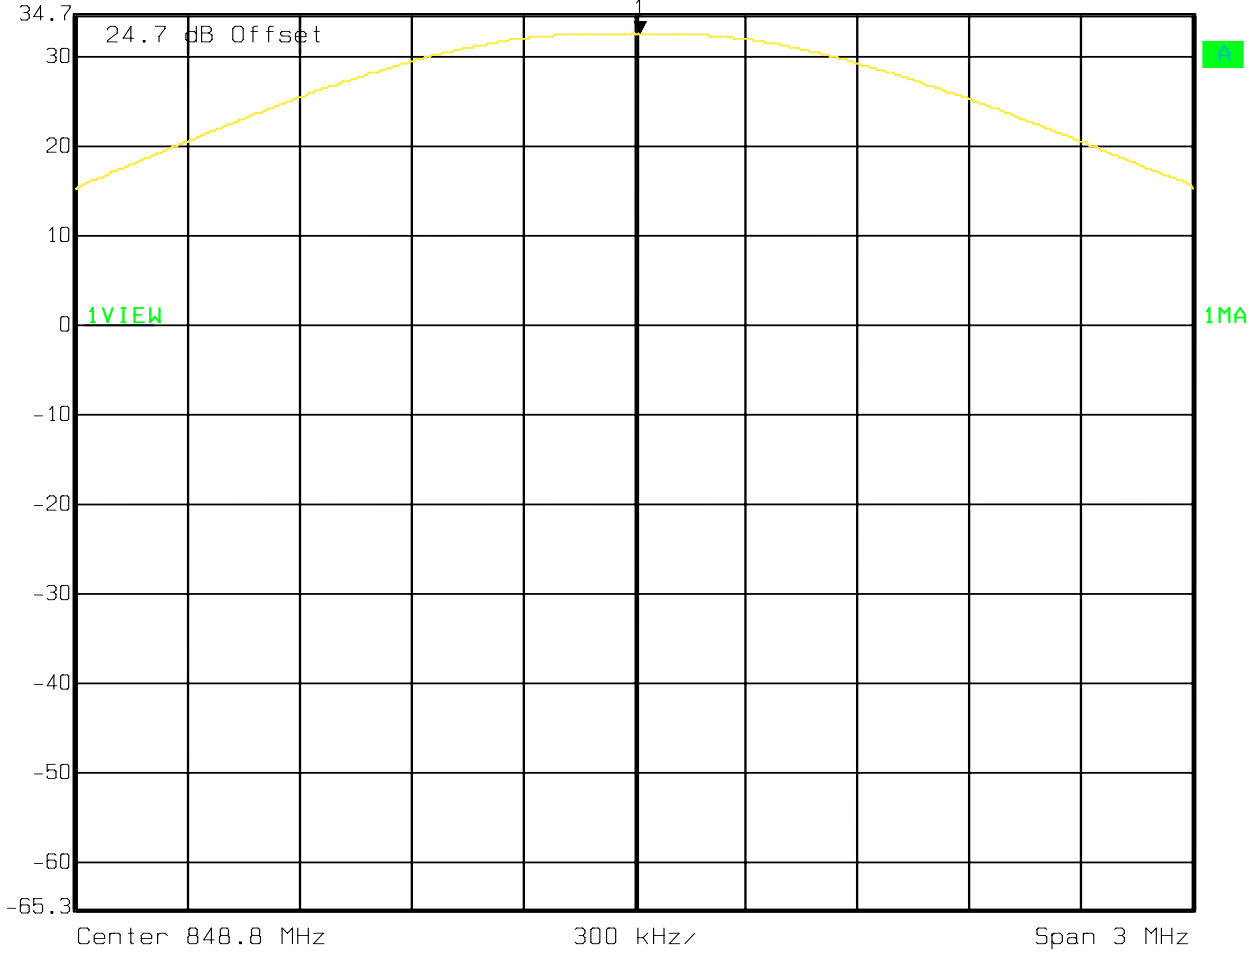


Date: 11.MAY 2009 09:47:13

**CONDUCTED PEAK POWER (EGPRS 850) CHANNEL 128 §22.913(a)**



Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 30.60 dBm VBW 3 MHz  
34.7 dBm 824.12484970 MHz SWT 5 ms Unit dBm

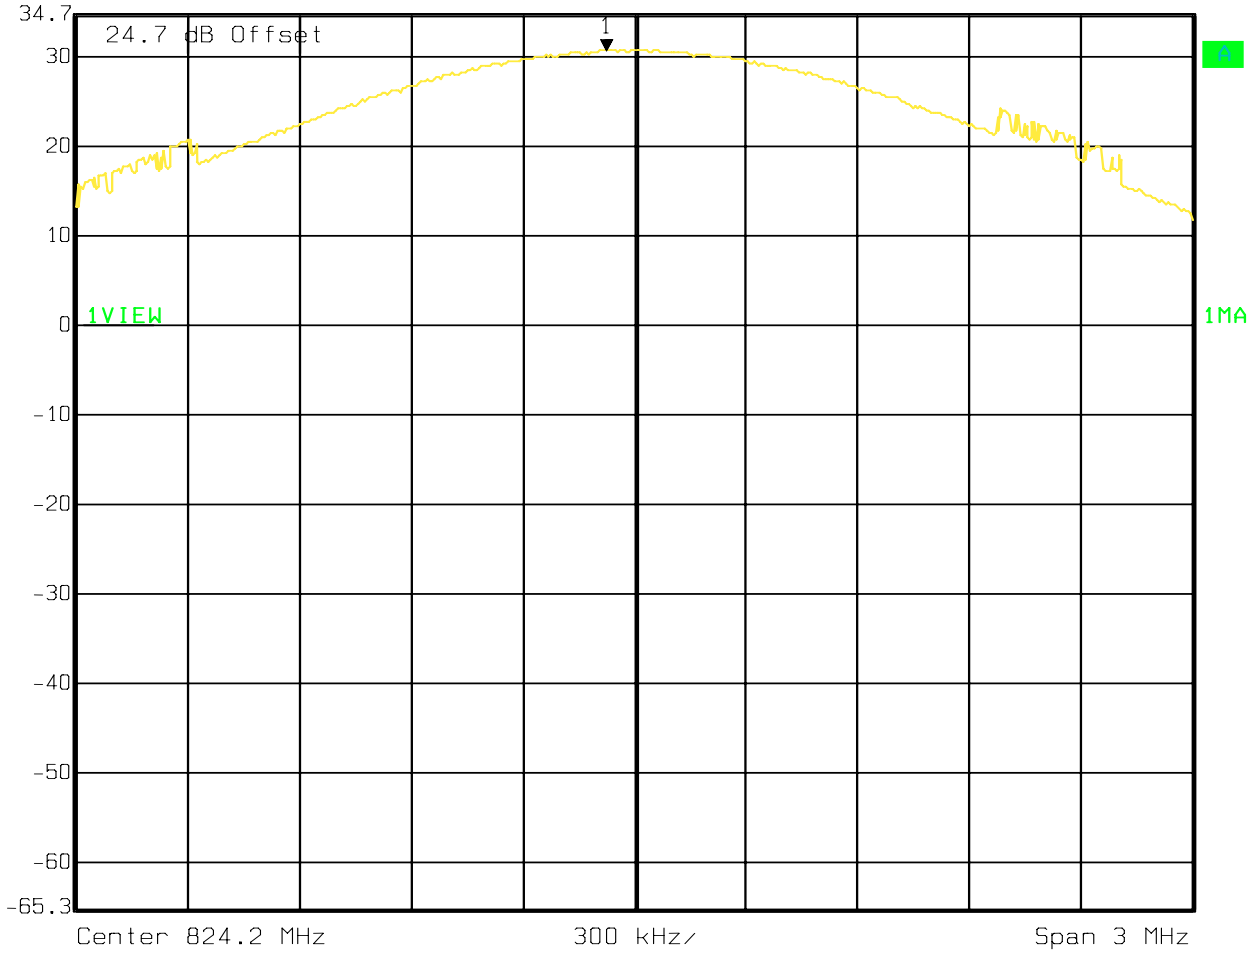


Date: 11.MAY 2009 09:49:52



**CONDUCTED PEAK POWER (EGPRS 850) CHANNEL 190 §22.913(a)**



Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 30.54 dBm VBW 3 MHz  
34.7 dBm 836.57294589 MHz SWT 5 ms Unit dBm

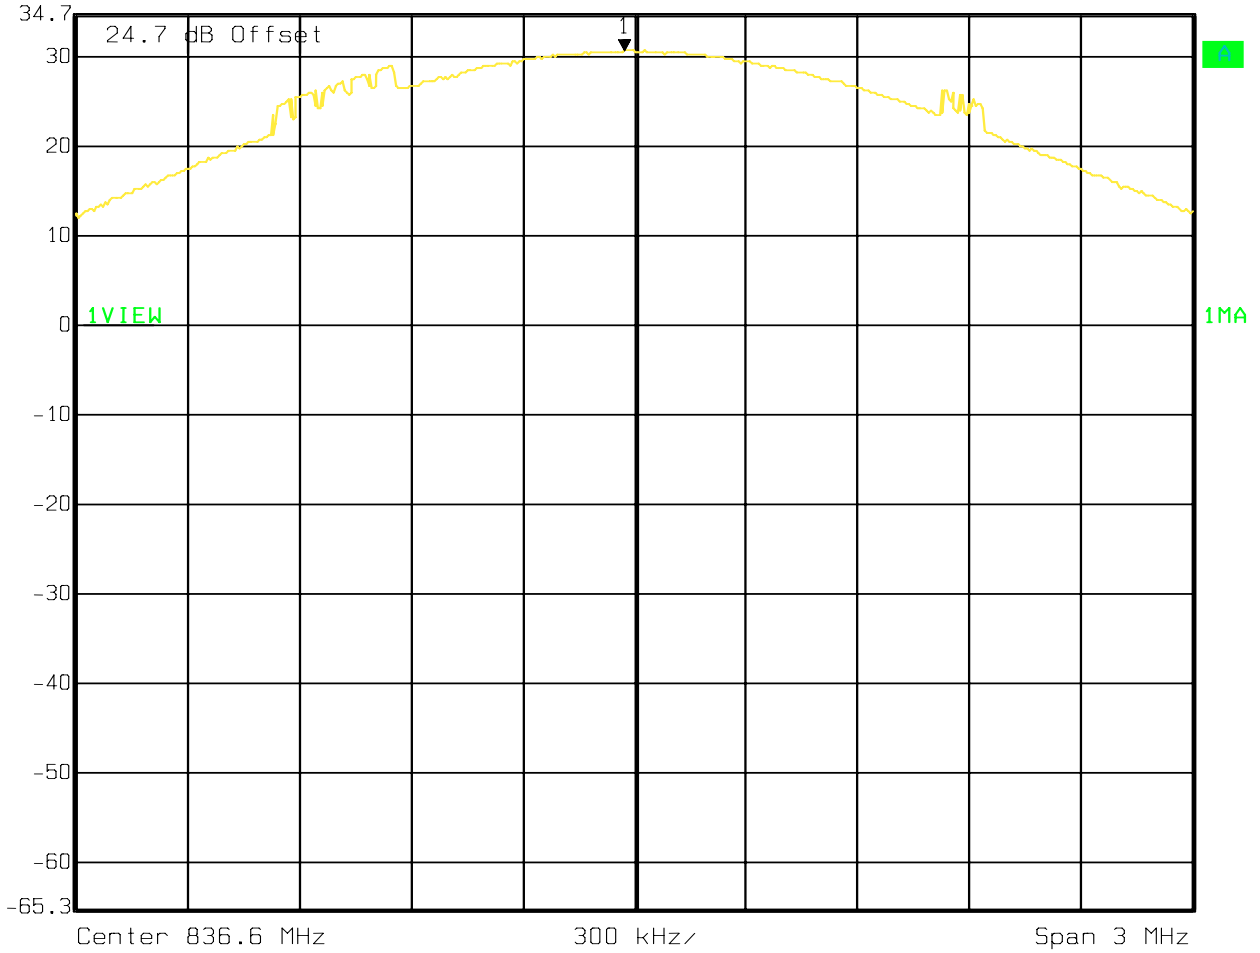


Date: 11.MAY 2009 09:48:52

**CONDUCTED PEAK POWER (EGPRS 850) CHANNEL 251 §22.913(a)**



Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 30.45 dBm VBW 3 MHz  
34.7 dBm 848.75490982 MHz SWT 5 ms Unit dBm

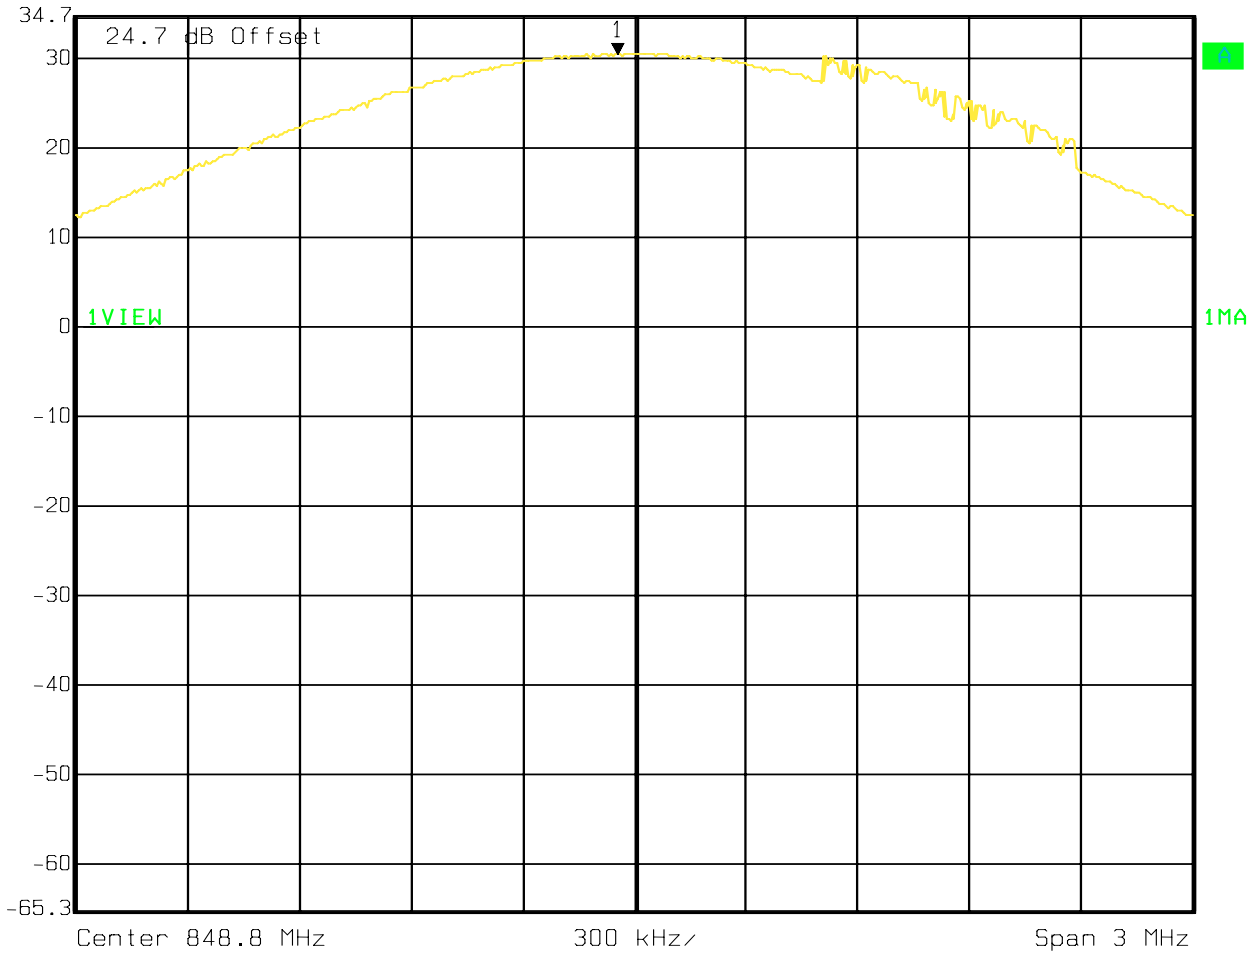


Date: 11.MAY 2009 09:50:46



**CONDUCTED PEAK POWER (UMTS FDD5) CHANNEL 4132 §22.913(a)**




Marker 1 [T1] RBW 5 MHz RF Att 50 dB  
Ref Lvl 44.7 dBm 28.42 dBm VBW 10 MHz  
44.7 dBm 825.36793587 MHz SWT 5 ms Unit dBm

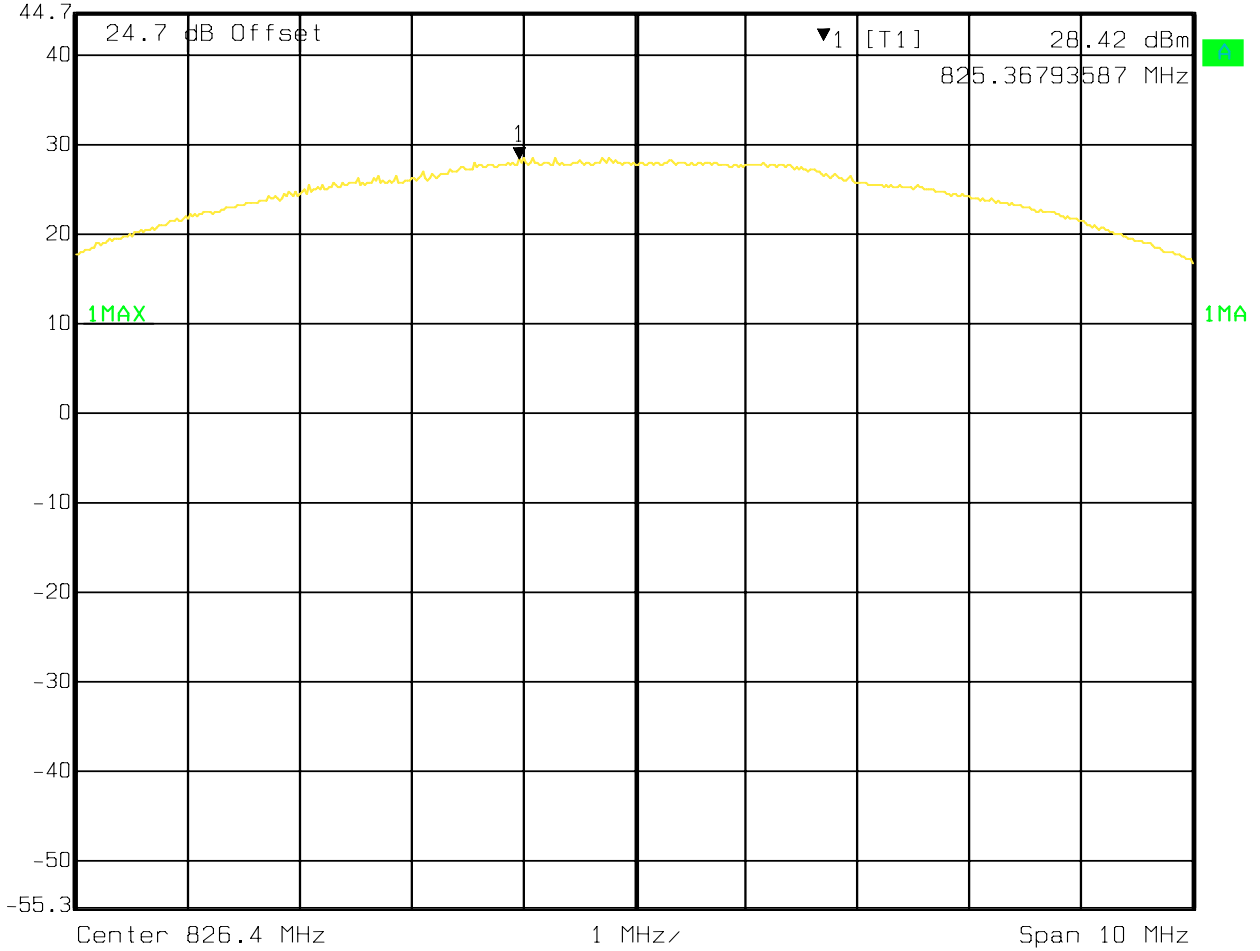

Date: 11.MAY 2009 12:28:19

**CONDUCTED PEAK POWER (UMTS FDD5) CHANNEL 4183 §22.913(a)**


Marker 1 [T1] RBW 5 MHz RF Att 50 dB  
Ref Lvl 27.93 dBm VBW 10 MHz  
44.7 dBm 834.44889780 MHz SWT 5 ms Unit dBm

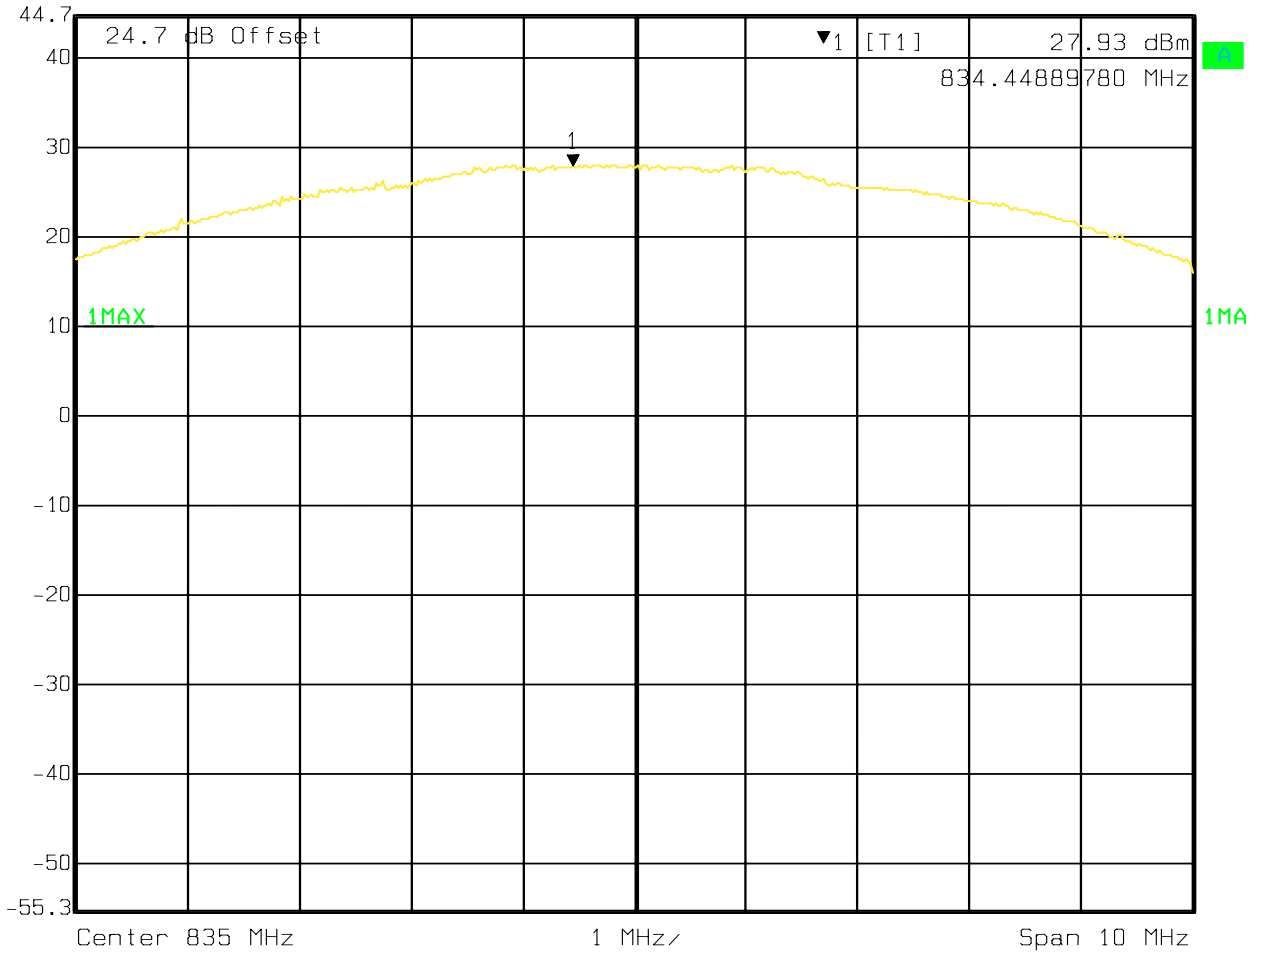

Date: 11.MAY 2009 12:27:24

**CONDUCTED PEAK POWER (UMTS FDD5) CHANNEL 4233 §22.913(a)**

Ref Lvl 44.7 dBm      Marker 1 [T1] 28.42 dBm      RBW 5 MHz      RF Att 50 dB  
44.7 dBm      845.74829659 MHz      VBW 10 MHz  
SWT 5 ms      Unit dBm

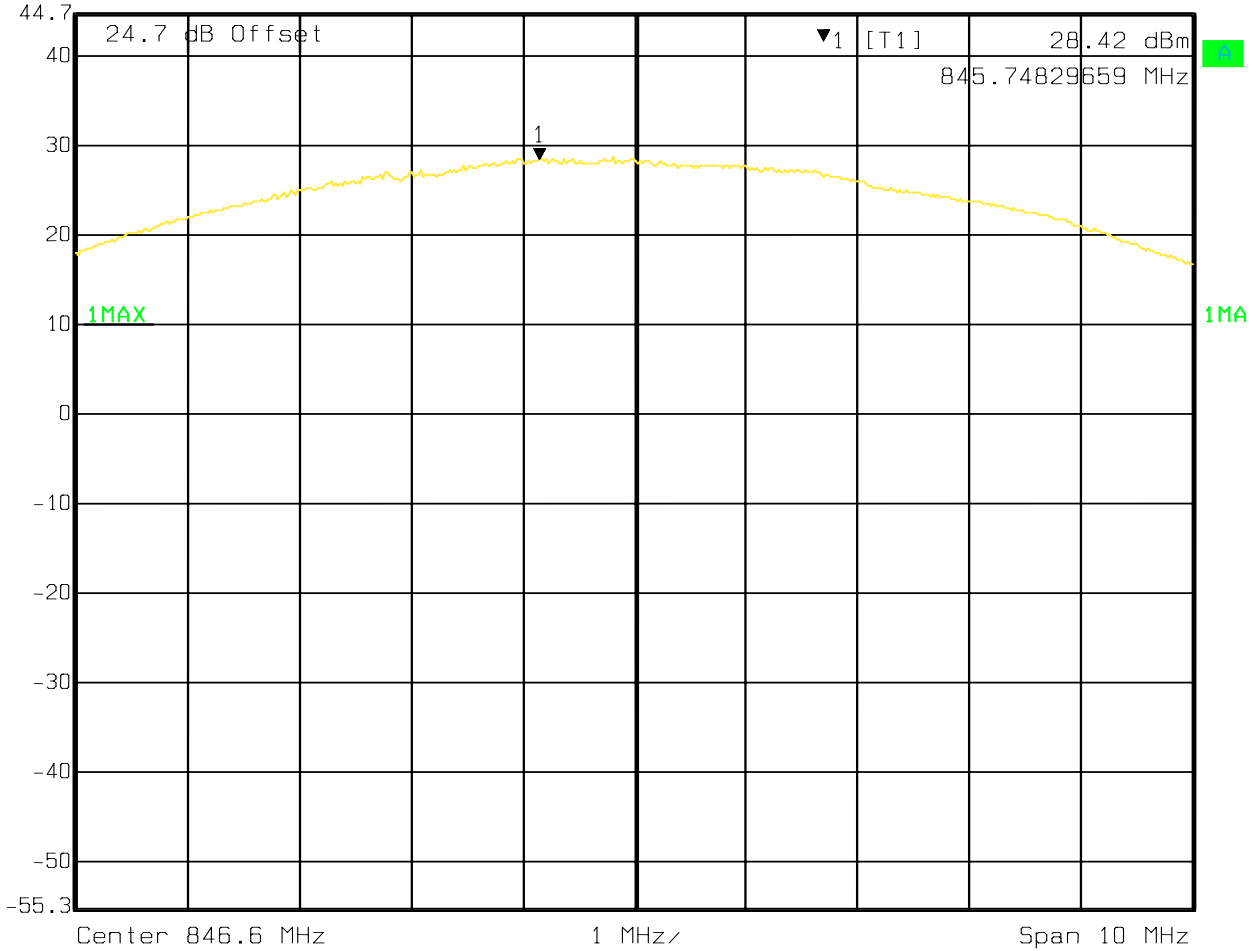


Date: 11.MAY 2009 12:25:11

**CONDUCTED PEAK POWER (PCS-1900) CHANNEL 512 §24.232(b)**



Marker: 1 [T1] RBW 1 MHz RF Att 30 dB  
 Ref Lvl 30.60 dBm VBW 3 MHz  
 34.7 dBm 1.85011283 GHz SWT 5 ms Unit dBm

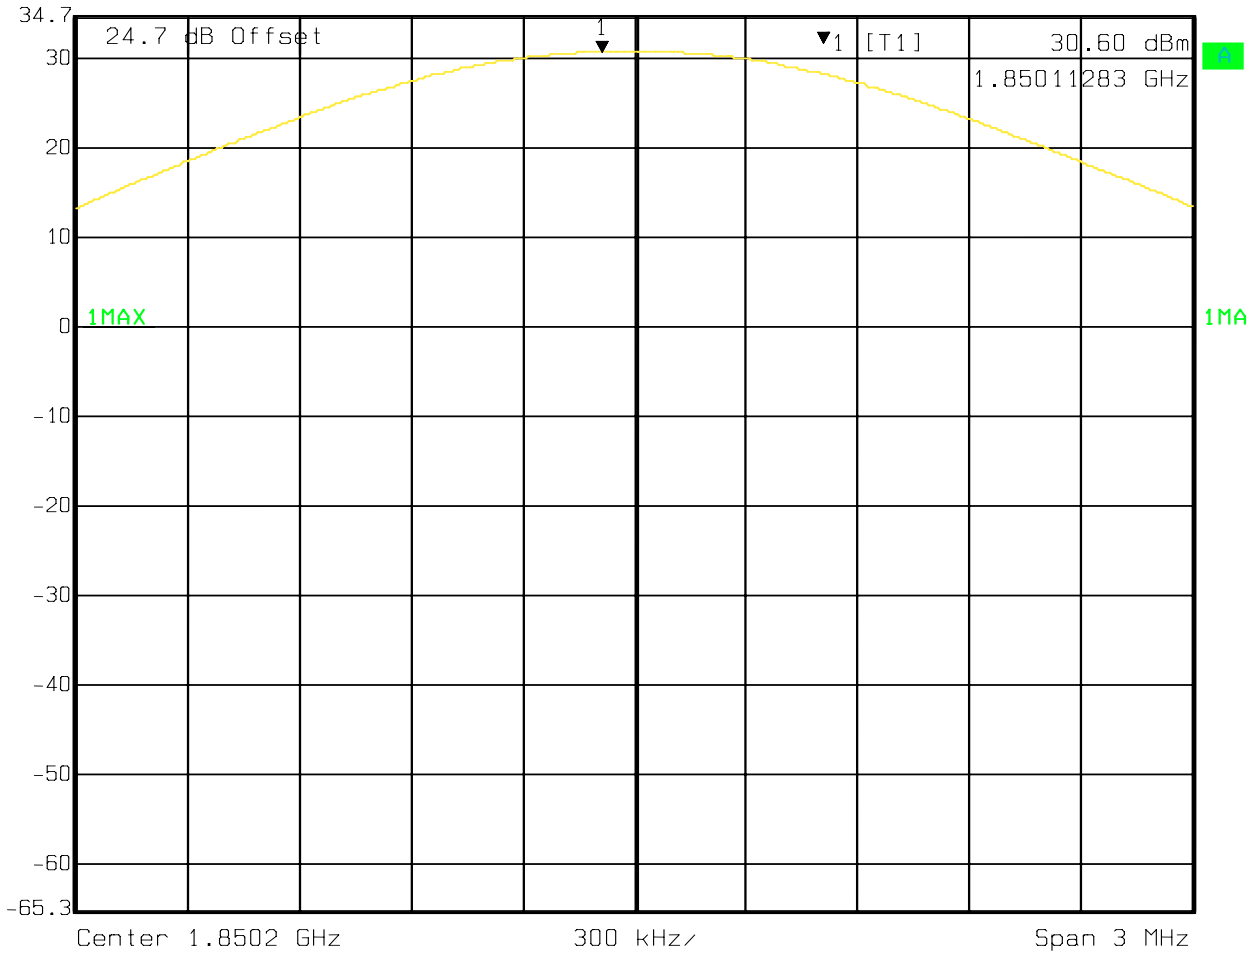


Date: 11.MAY 2009 11:04:36

**CONDUCTED PEAK POWER (PCS-1900) CHANNEL 661**

**§24.232(b)**


◆ Marker 1 [T1] RBW 1 MHz RF Att 30 dB  
 Ref Lvl 34.7 dBm 30.58 dBm VBW 3 MHz  
 1.87990681 GHz 1.87990681 GHz SWT 5 ms Unit dBm

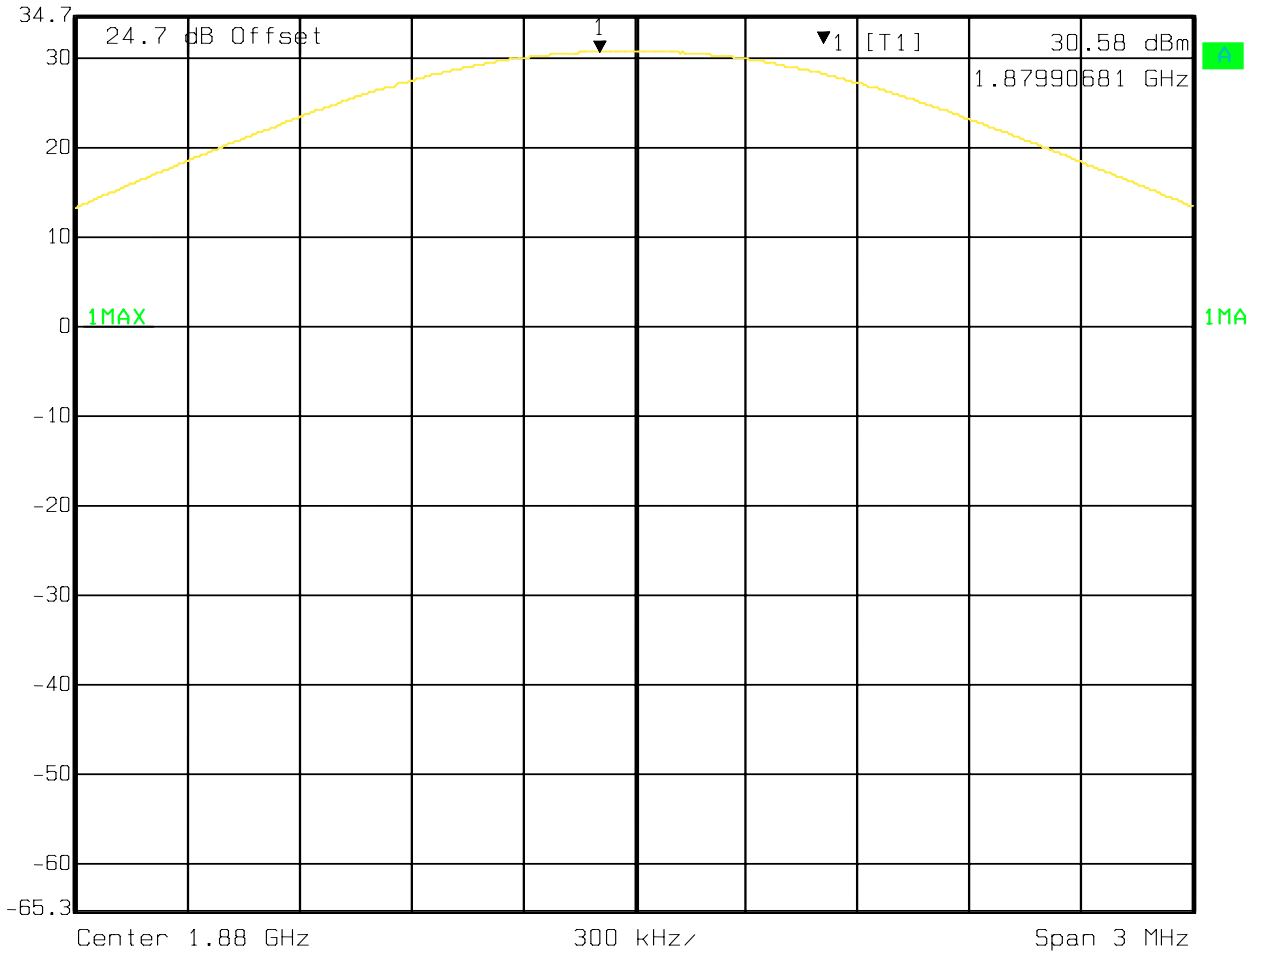

Date: 11.MAY 2009 11:06:41

**CONDUCTED PEAK POWER (PCS-1900) CHANNEL 810 §24.232(b)**



 Marker 1 [T1] RBW 1 MHz RF Att 30 dB  
 Ref Lvl 30.28 dBm VBW 3 MHz  
 34.7 dBm 1.90970681 GHz SWT 5 ms Unit dBm

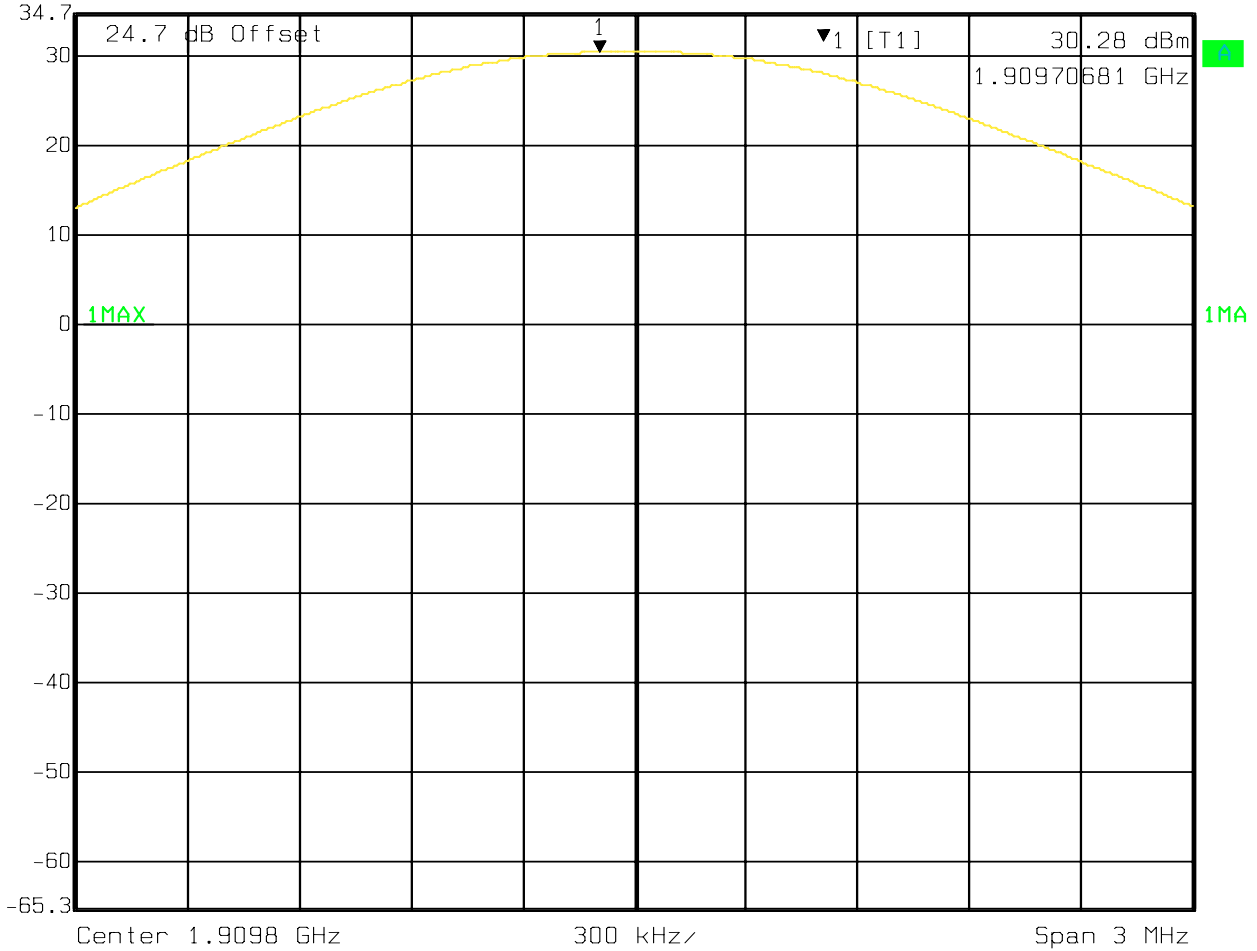

Date: 11.MAY 2009 11:07:31



**CONDUCTED PEAK POWER (EGPRS 1900) CHANNEL 512 §24.232(b)**

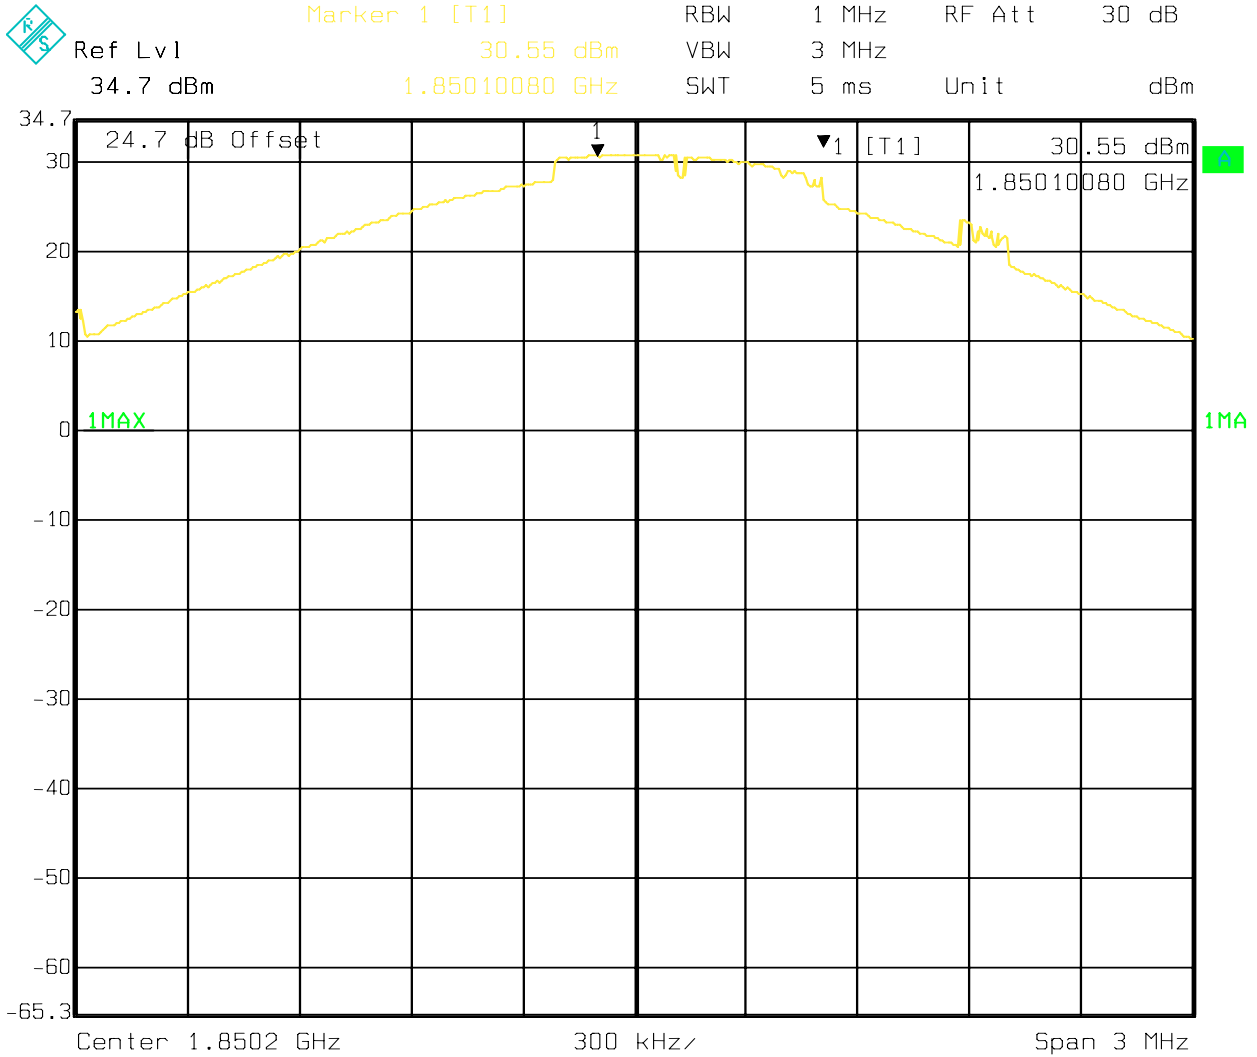


Date: 11.MAY 2009 11:03:51

**CONDUCTED PEAK POWER (GPRS 1900) CHANNEL 661 §24.232(b)**




Marker 1 [T1] RBW 1 MHz RF Att 30 dB  
 Ref Lvl 30.55 dBm VBW 3 MHz  
 34.7 dBm 1.87992485 GHz SWT 5 ms Unit dBm

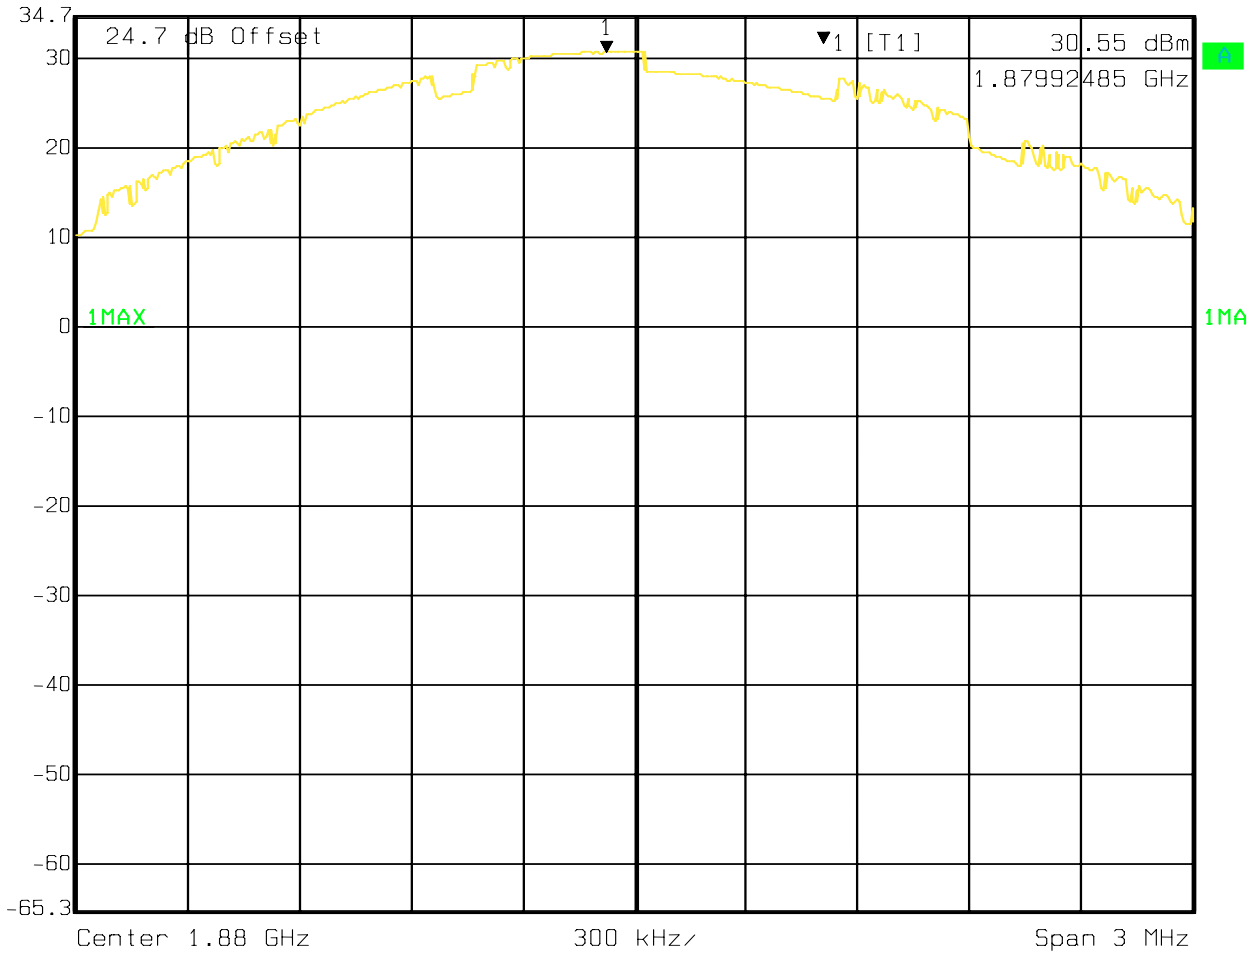

Date: 11.MAY 2009 11:02:46

**CONDUCTED PEAK POWER (GPRS 1900) CHANNEL 810 §24.232(b)**

◆	Ref Lvl	34.7 dBm	Marker 1 [T1]	30.28 dBm	RBW	1 MHz	RF Att	30 dB
			1.90983908 GHz		VBW	3 MHz		
					SWT	5 ms	Unit	dBm

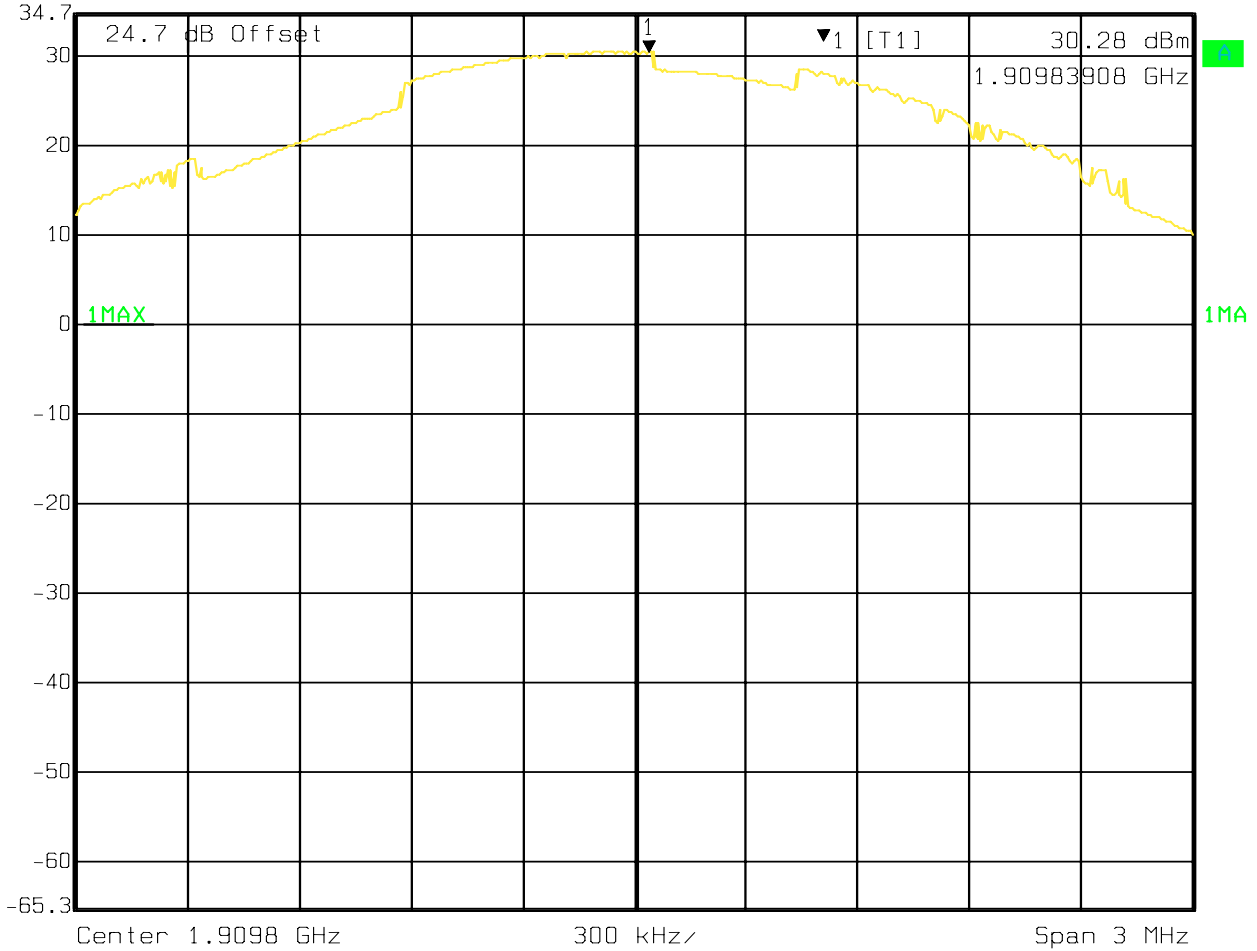


Date: 11.MAY 2009 11:01:34

**CONDUCTED PEAK POWER (UMTS FDD2) CHANNEL 9262 §24.232(b)**




Marker: 1 [T1] RBW 5 MHz RF Att 30 dB  
 Ref Lvl 25.06 dBm VBW 10 MHz  
 34.7 dBm 1.85236994 GHz SWT 5 ms Unit dBm

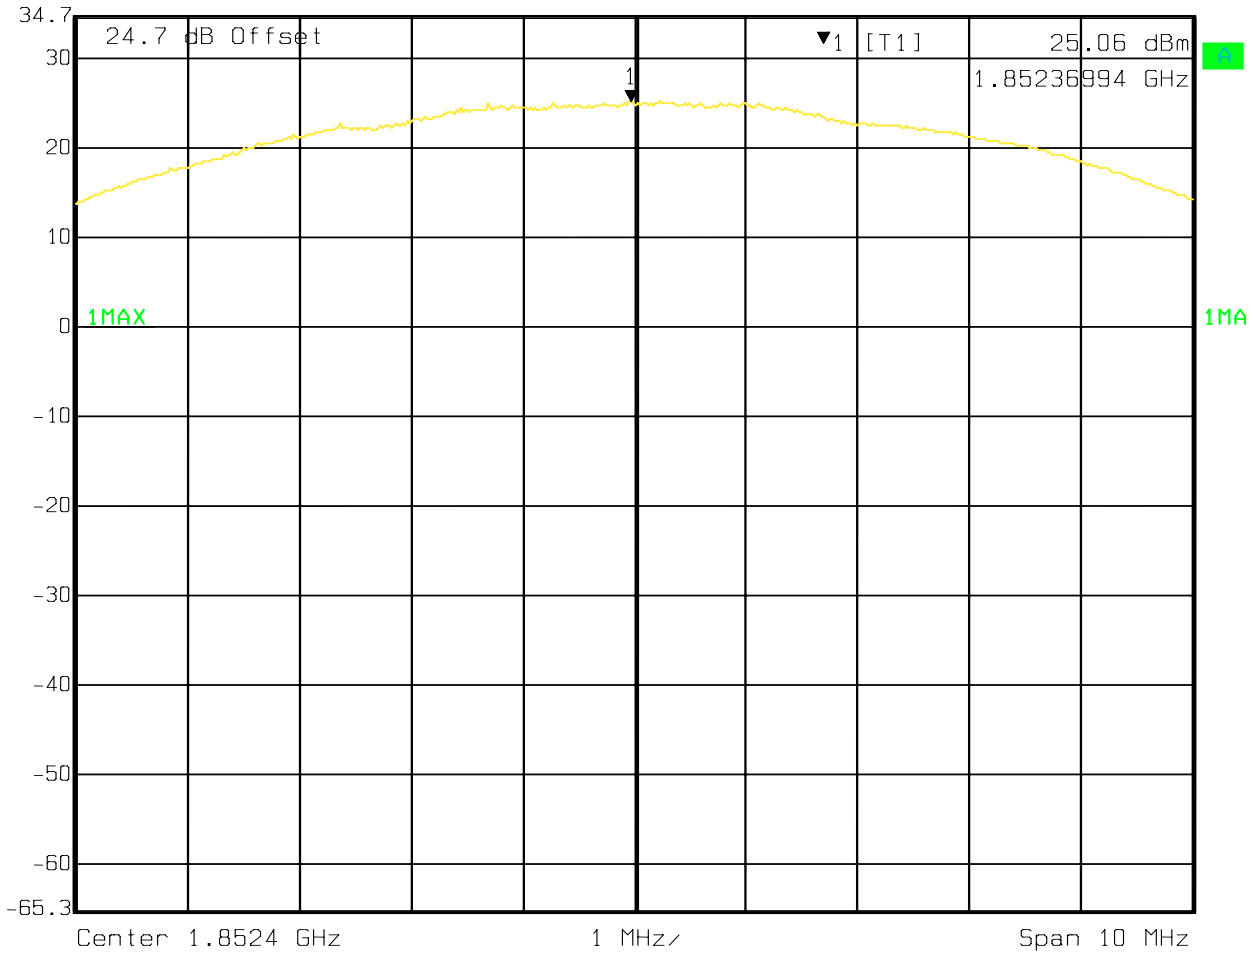

Date: 11.MAY 2009 11:35:56

**CONDUCTED PEAK POWER (UMTS FDD2) CHANNEL 9400 §24.232(b)**

Marker 1 [T1] RBW 5 MHz RF Att 30 dB  
Ref Lvl 25.06 dBm VBW 10 MHz  
34.7 dBm 1.87942886 GHz SWT 5 ms Unit dBm

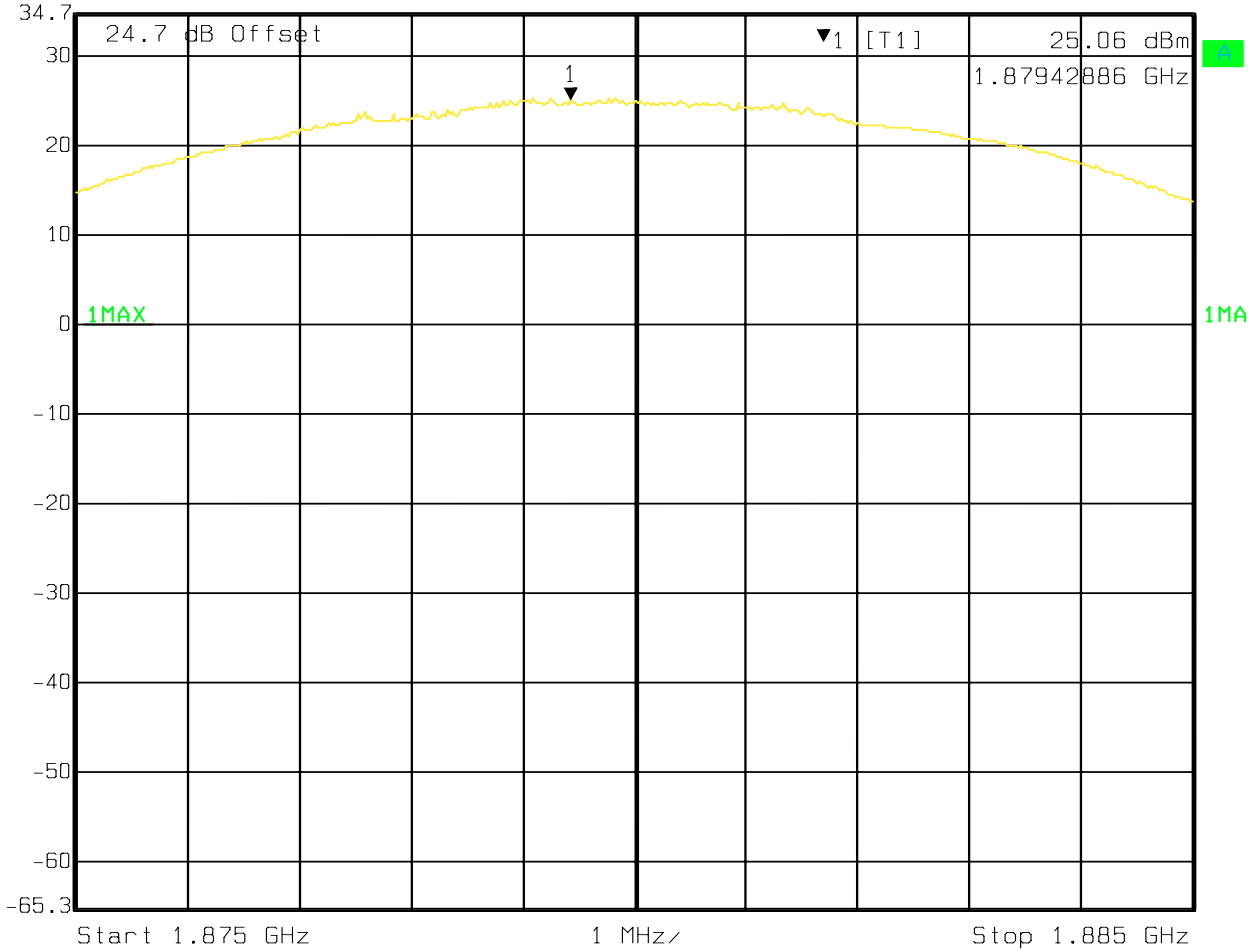


Date: 11.MAY 2009 11:38:12

**CONDUCTED PEAK POWER (UMTS FDD2) CHANNEL 9538 §24.232(b)**



Ref Lvl 34.7 dBm  
Marker 1 [T1] 24.20 dBm  
1.90672826 GHz  
RBW 5 MHz RF Att 30 dB  
VBW 10 MHz  
SWT 5 ms Unit dBm

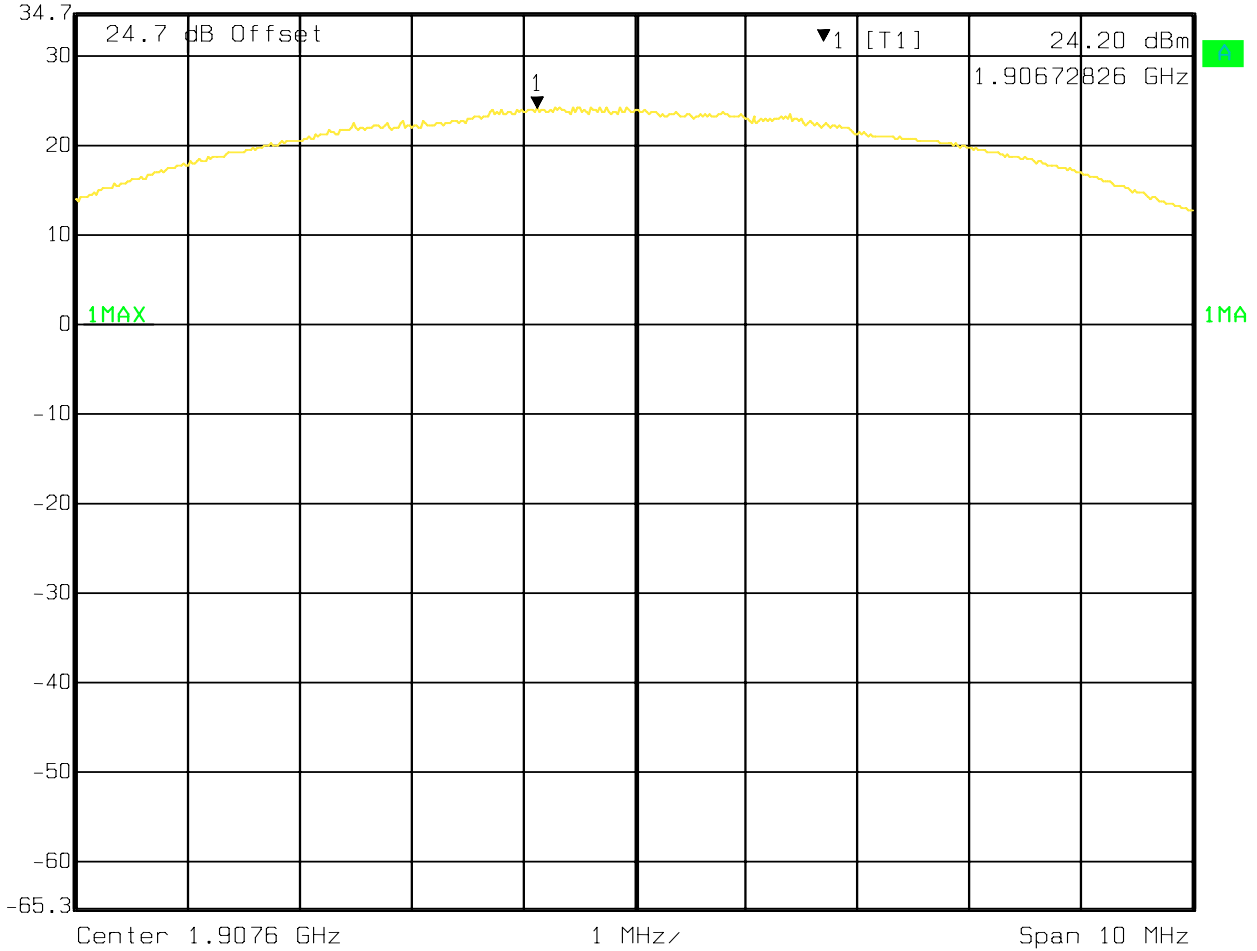

Date: 11.MAY 2009 11:39:13




**EIRP (GSM 850) CHANNEL 128 §22.913(a)**

EUT: A1303  
Customer:: Apple  
Test Mode: GSM 850  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

***SWEEP TABLE: "EIRP 850 CH 128 V"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
819.2 MHz	829.2 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

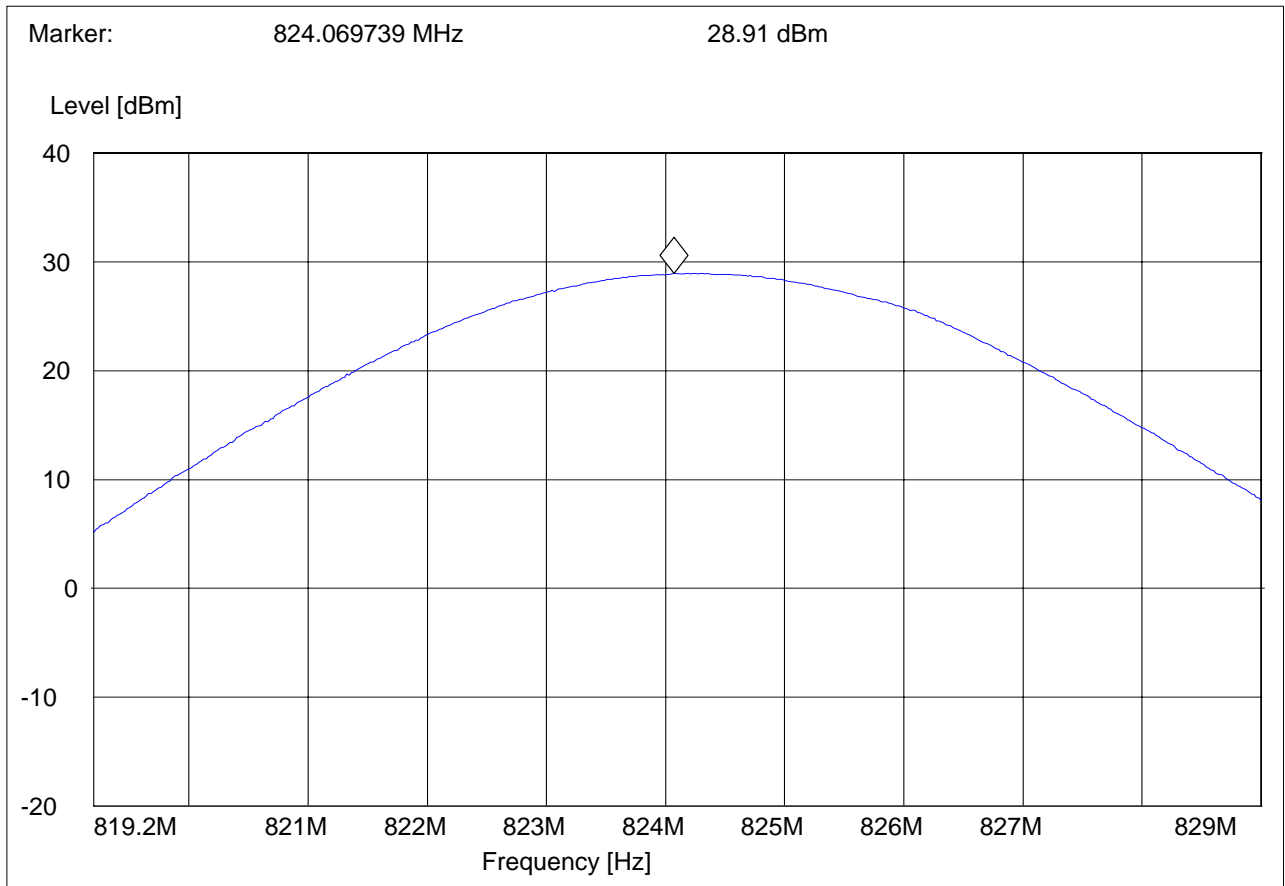




**EIRP (GSM 850) CHANNEL 190 §22.913(a)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: GSM 850  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

**SWEEP TABLE: "EIRP 850 CH 190 V"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
831.6 MHz	841.6 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

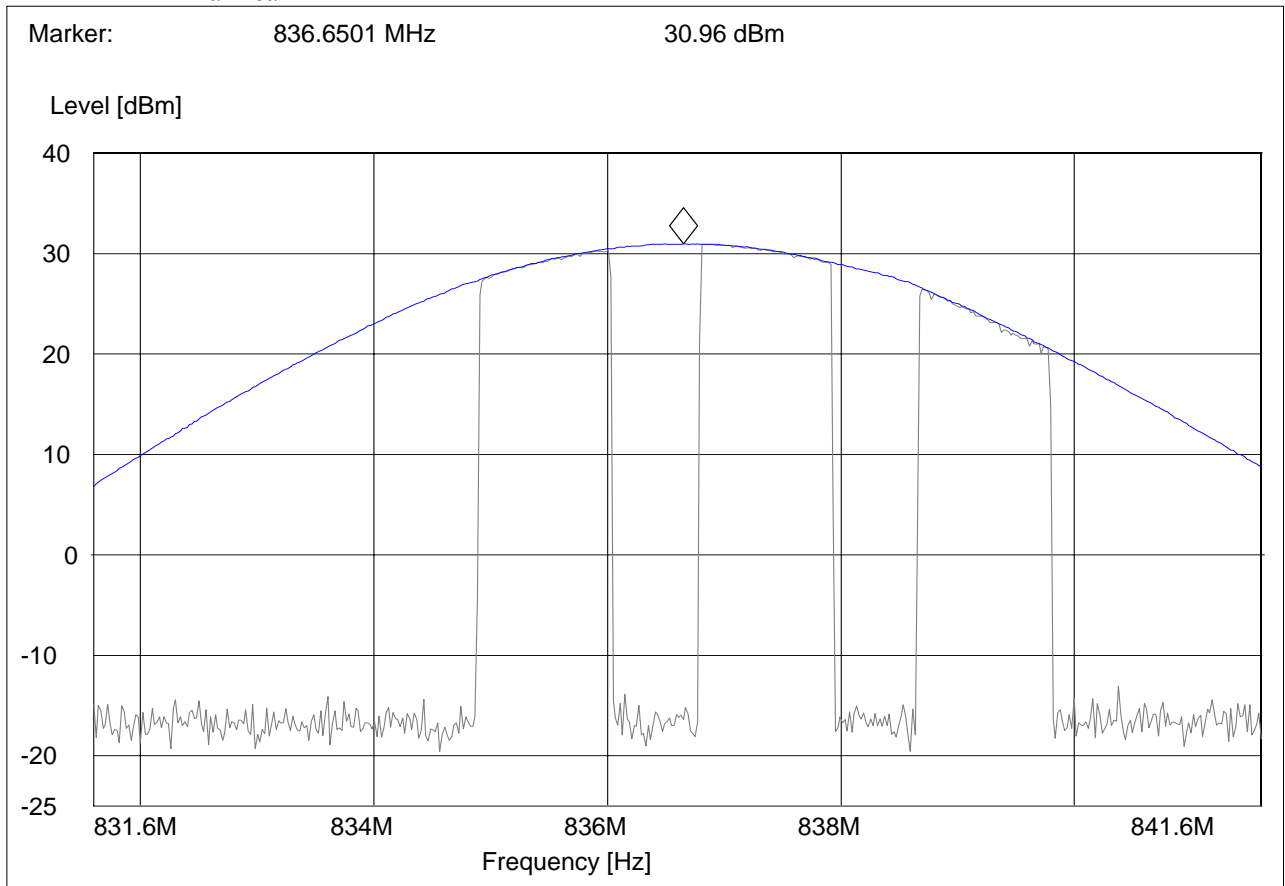






**EIRP (GSM 850) CHANNEL 251 §22.913(a)**

EUT: A1303  
Customer:: Apple  
Test Mode: GSM 850  
ANT Orientation: V  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: Internal Battery  
Comments:

**SWEEP TABLE: "EIRP 850 CH 251 V"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

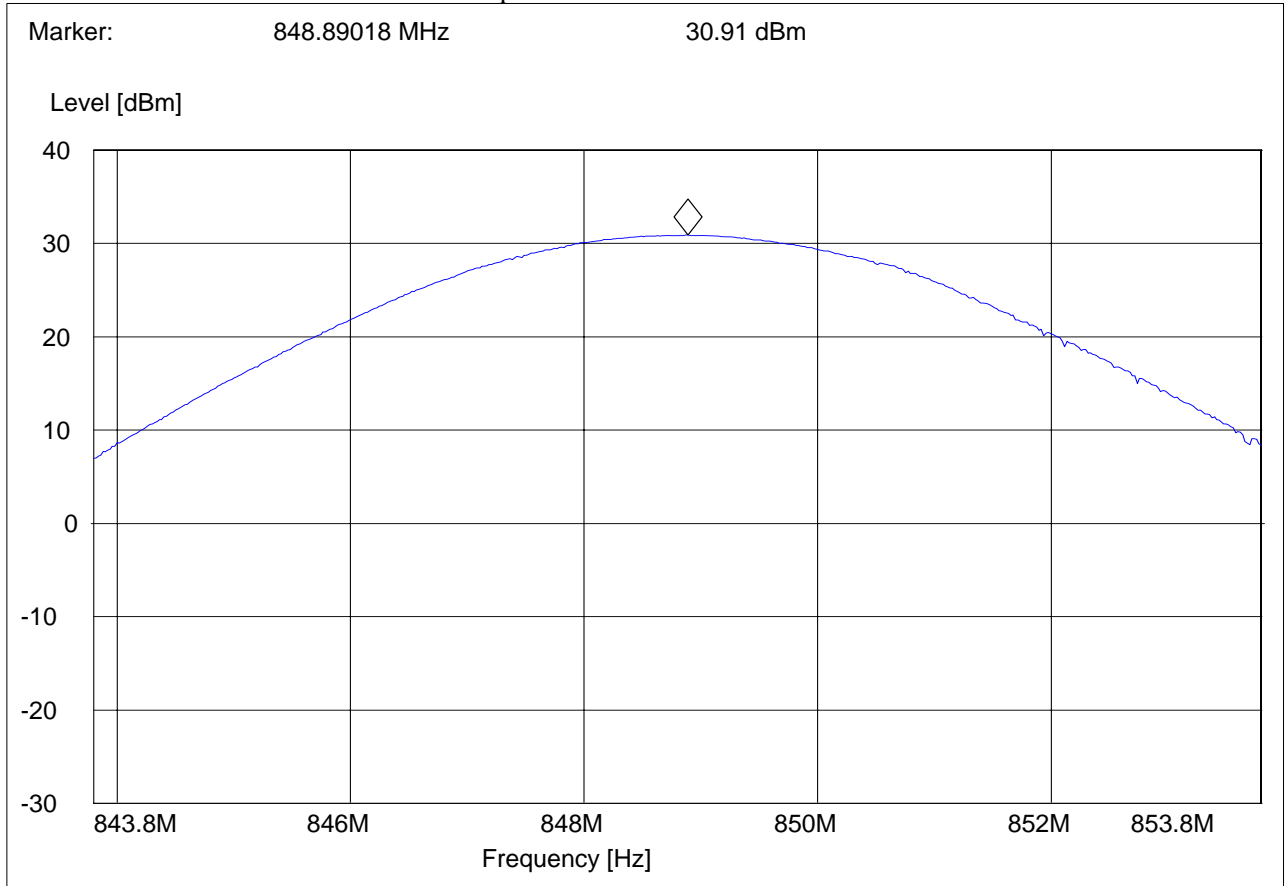




**EIRP (EGPRS 850) CHANNEL 128 §22.913(a)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: EGPRS 850  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

**SWEEP TABLE: "EIRP 850 CH 128 V"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
819.2 MHz	829.2 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

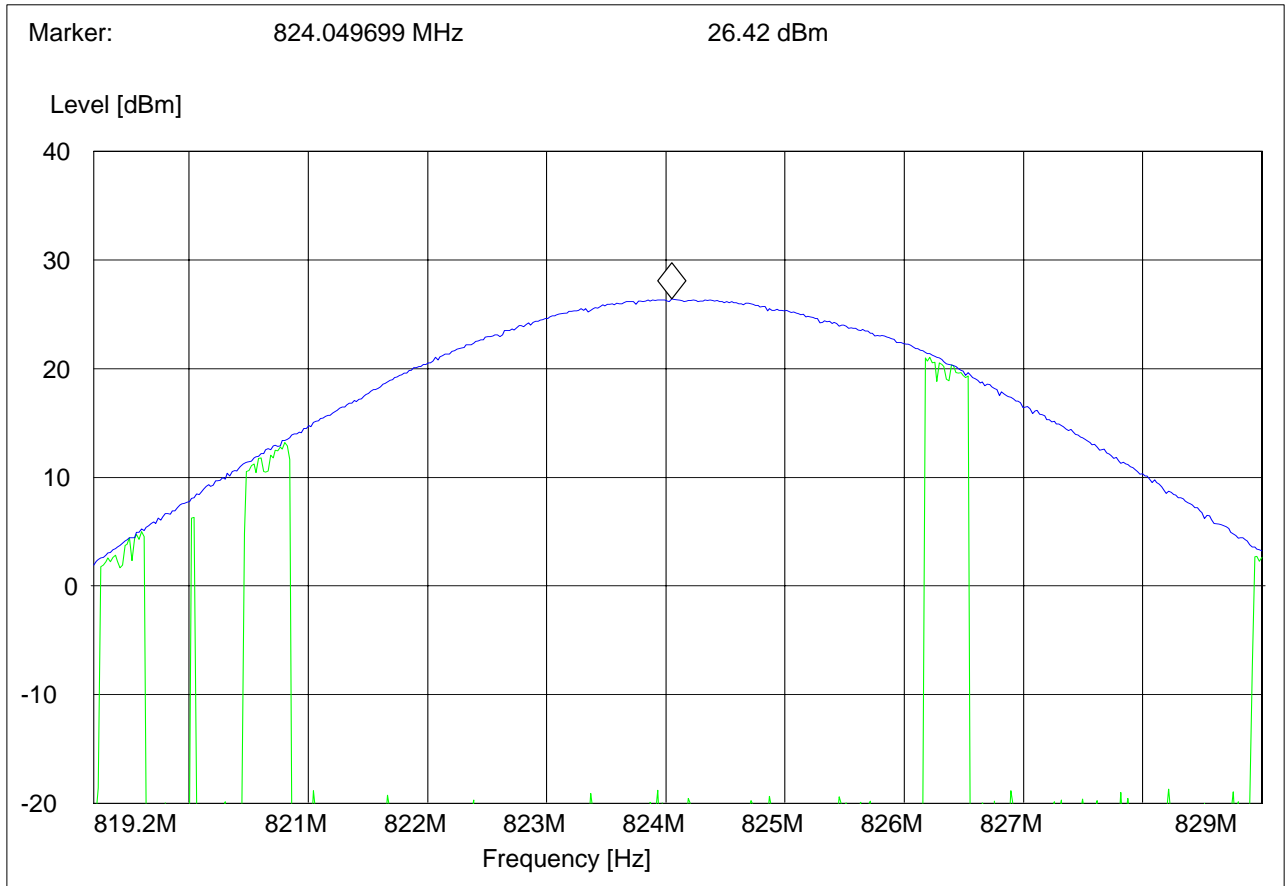




**EIRP (EGPRS 850) CHANNEL 190 §22.913(a)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: EGPRS 850  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

**SWEEP TABLE: "EIRP 850 CH 190 V"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
831.6 MHz	841.6 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

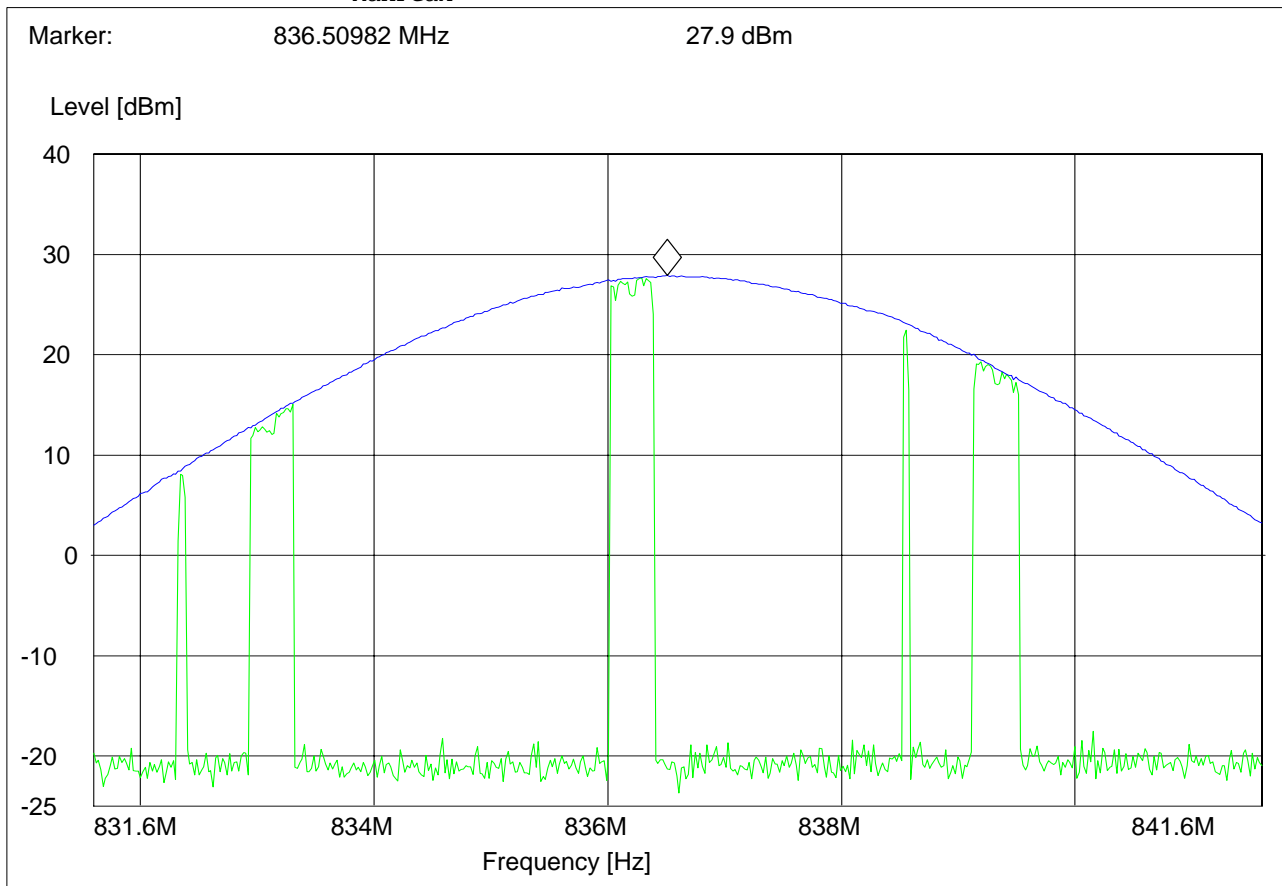




**EIRP (EGPRS 850) CHANNEL 251 §22.913(a)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: EGPRS 850  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

***SWEEP TABLE: "EIRP 850 CH 251 V"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

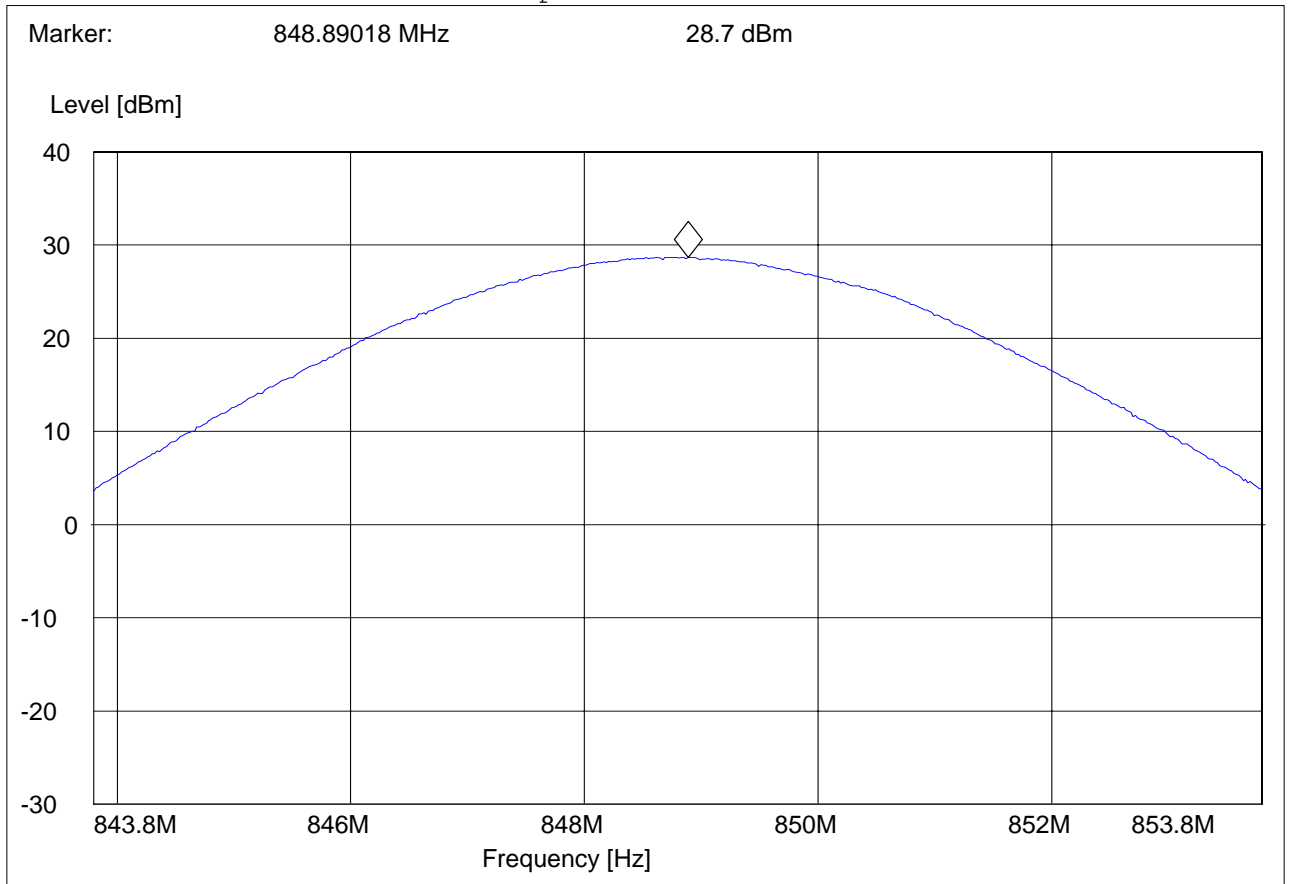




**EIRP (UMTS FDD5) CHANNEL 4132 §22.913(a)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

***SWEEP TABLE: "EIRP 850 CH 4132V"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
816.4 MHz	836.4 MHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM

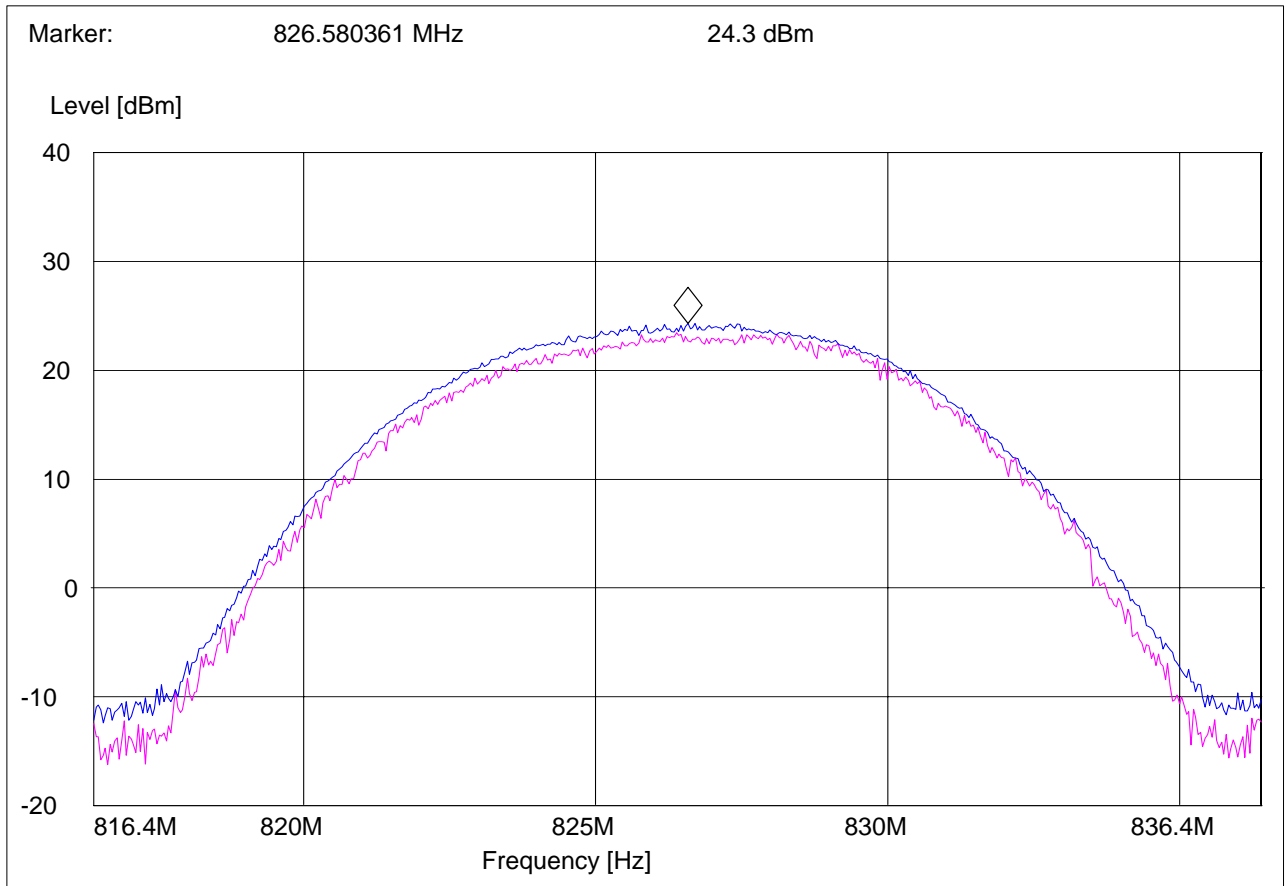




**EIRP (UMTS FDD5) CHANNEL 4183 §22.913(a)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

***SWEEP TABLE: "EIRP 850 CH 4183 V"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
826.6 MHz	846.6 MHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM

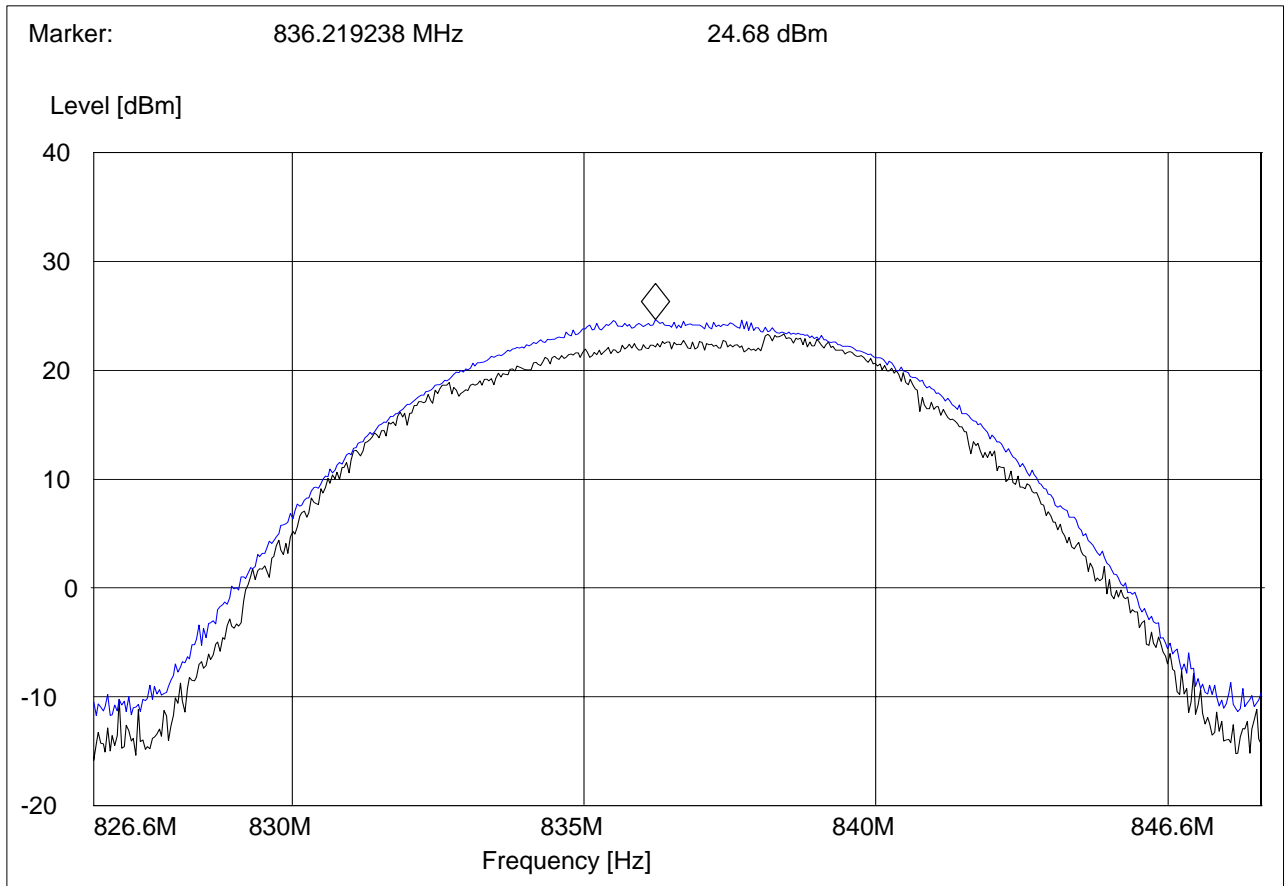




**EIRP (UMTS FDD5) CHANNEL 4233 §22.913(a)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

***SWEEP TABLE: "EIRP 850 CH 4233 V"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
836.6 MHz	856.6 MHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM

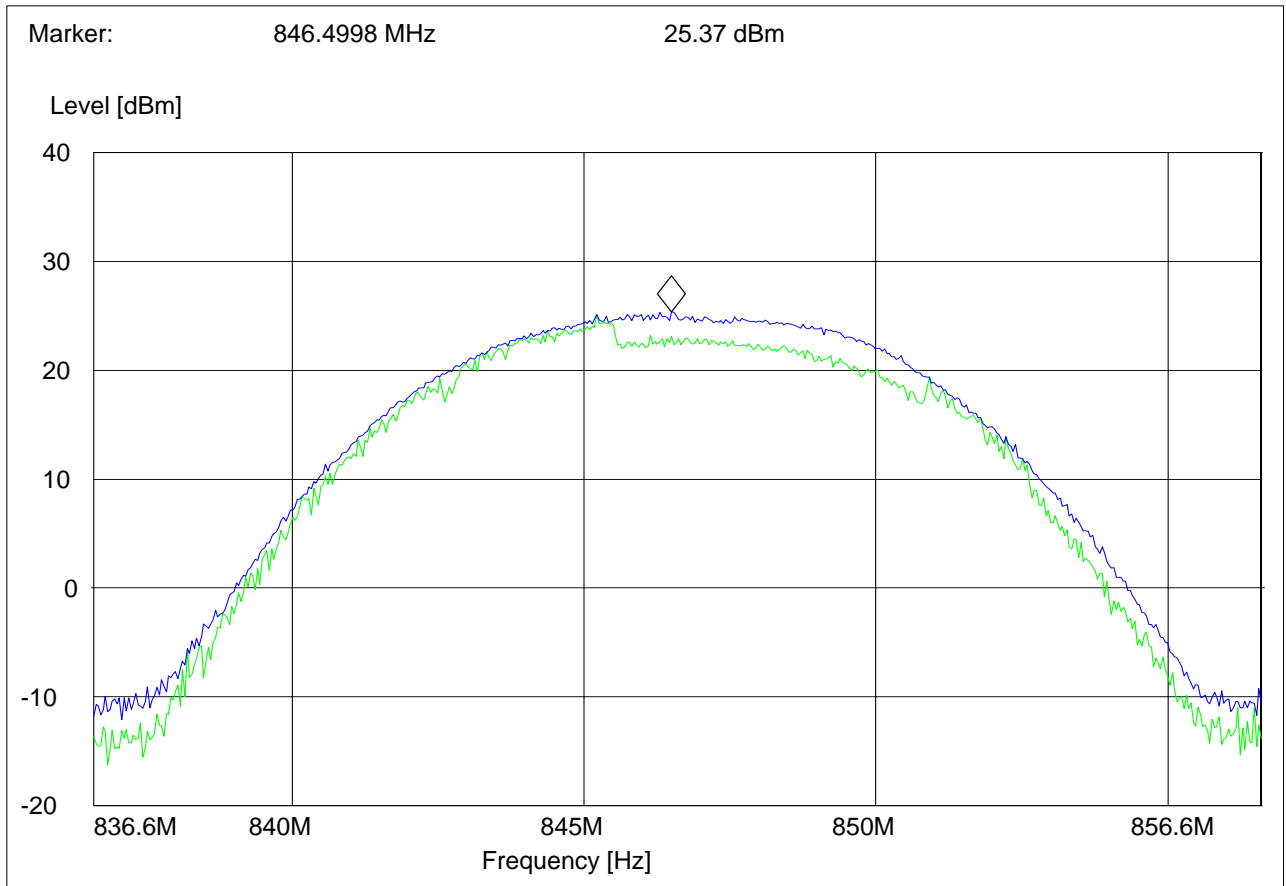


EIRP (PCS-1900) CHANNEL 512 §24.232(b)

**Final Result 1**

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Comment
1849.969940	28.4	20.000	3000.000	120.0	V	185.0	-74.7	

**EIRP 1900 CH512**

EIRP 1900 CH512

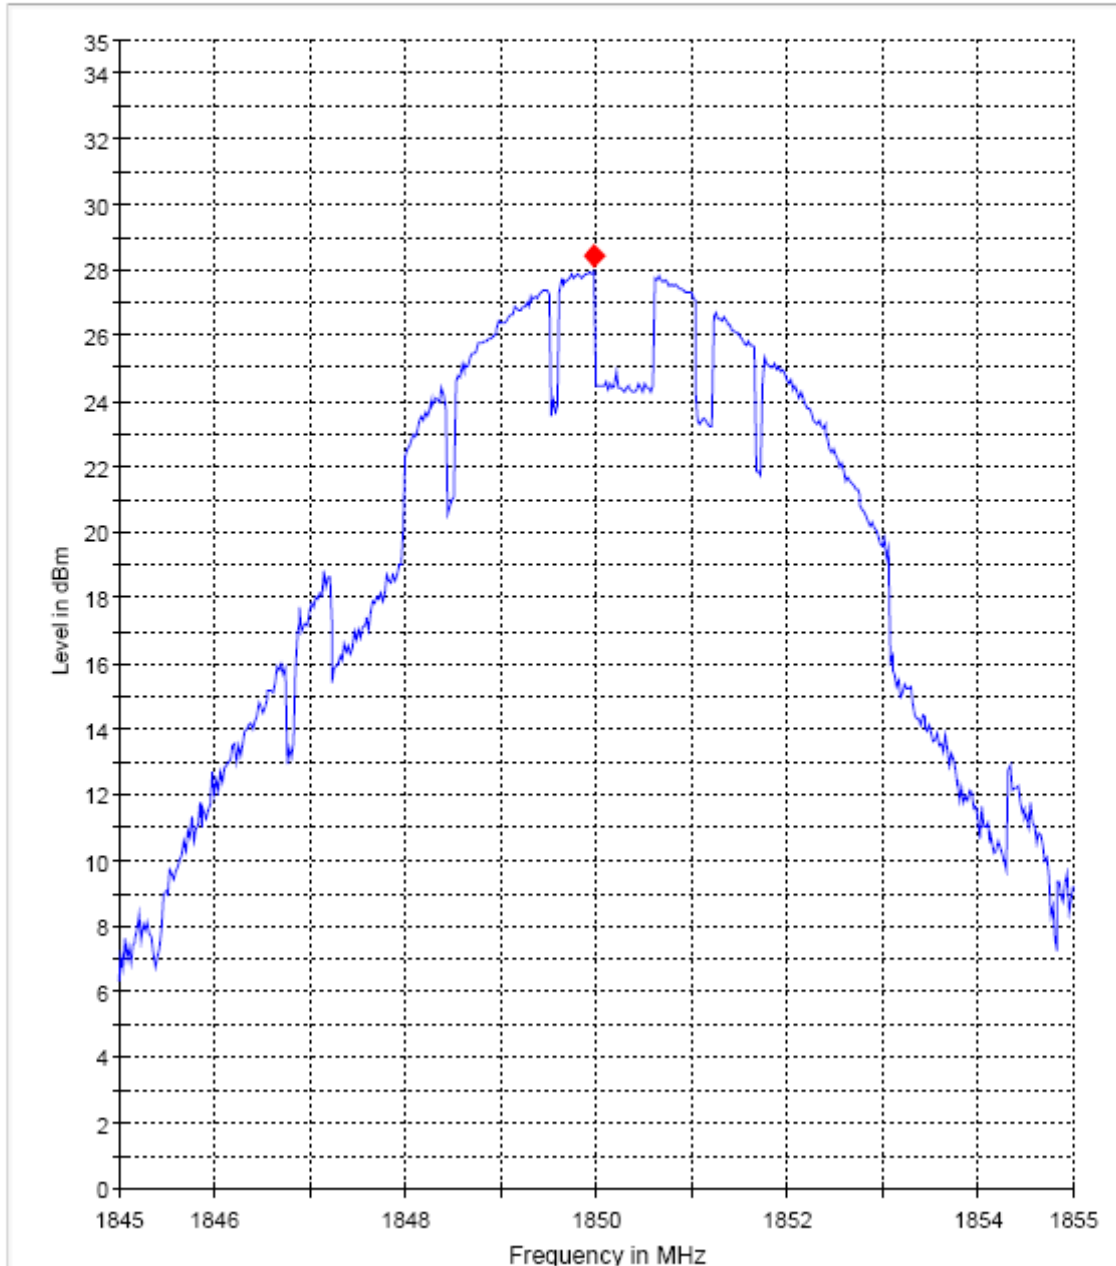

— Preview Result 1      ◆ Final Result 1




EIRP (PCS-1900) CHANNEL 661 §24.232(b)

**Final Result 1**

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Comment
1879.529058	28.6	20.000	3000.000	139.0	V	175.0	-74.4	

**EIRP 1900 CH661**

EIRP 1900 CH661

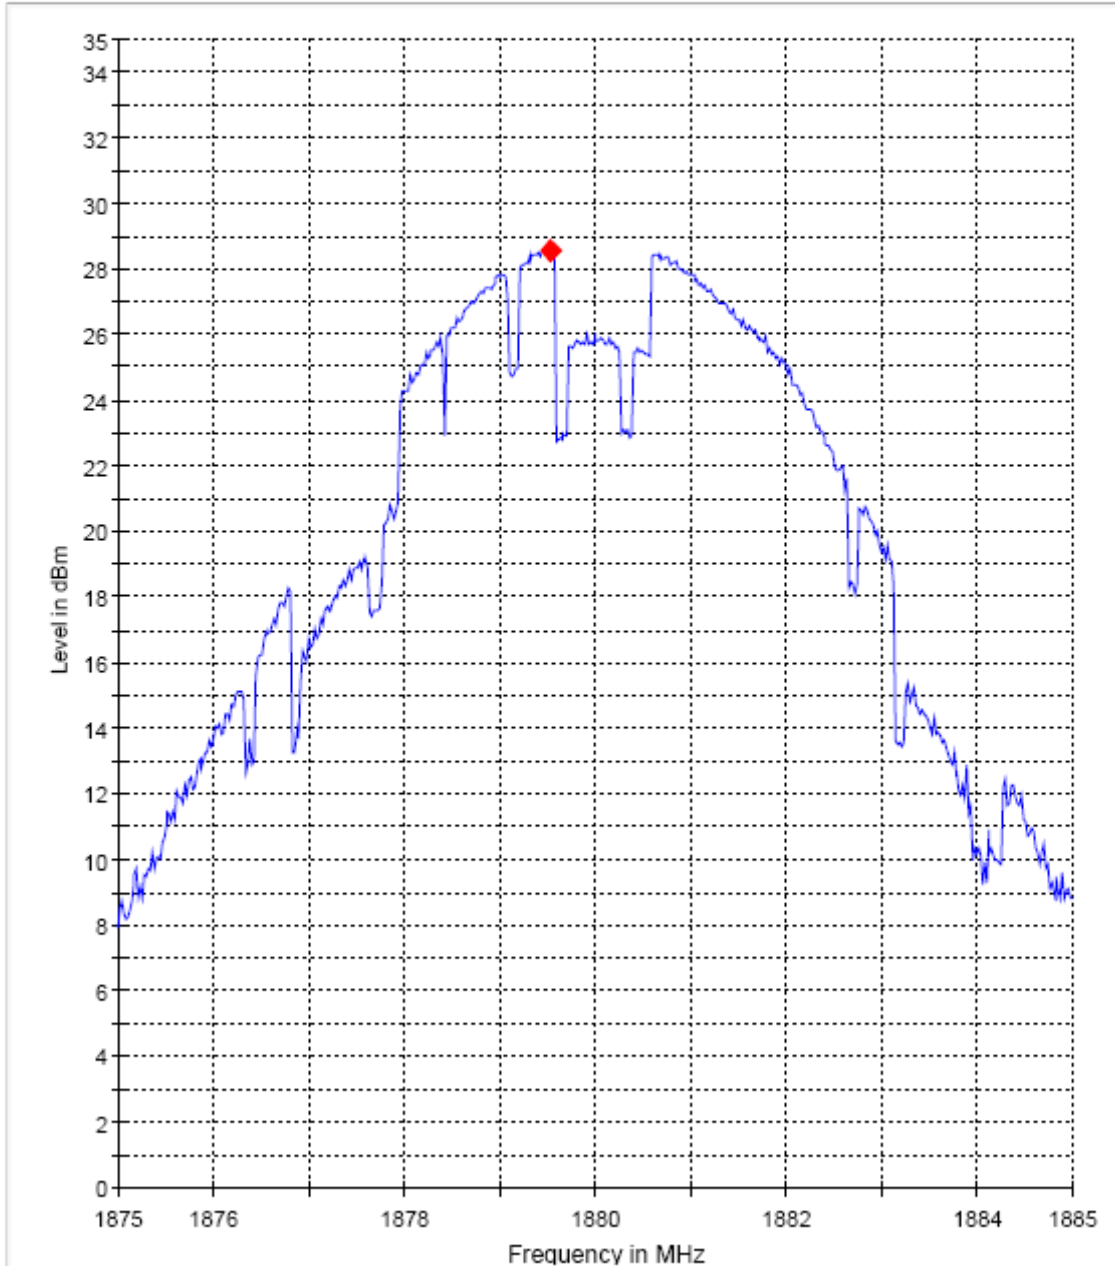

— Preview Result 1      ◆ Final Result 1


**EIRP (PCS-1900) CHANNEL 810 §24.232(b)**

**Final Result 1**

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Comment
1909.689379	28.4	20.000	3000.000	120.0	V	175.0	-74.7	

**EIRP 1900 CH810**

EIRP 1900 CH810

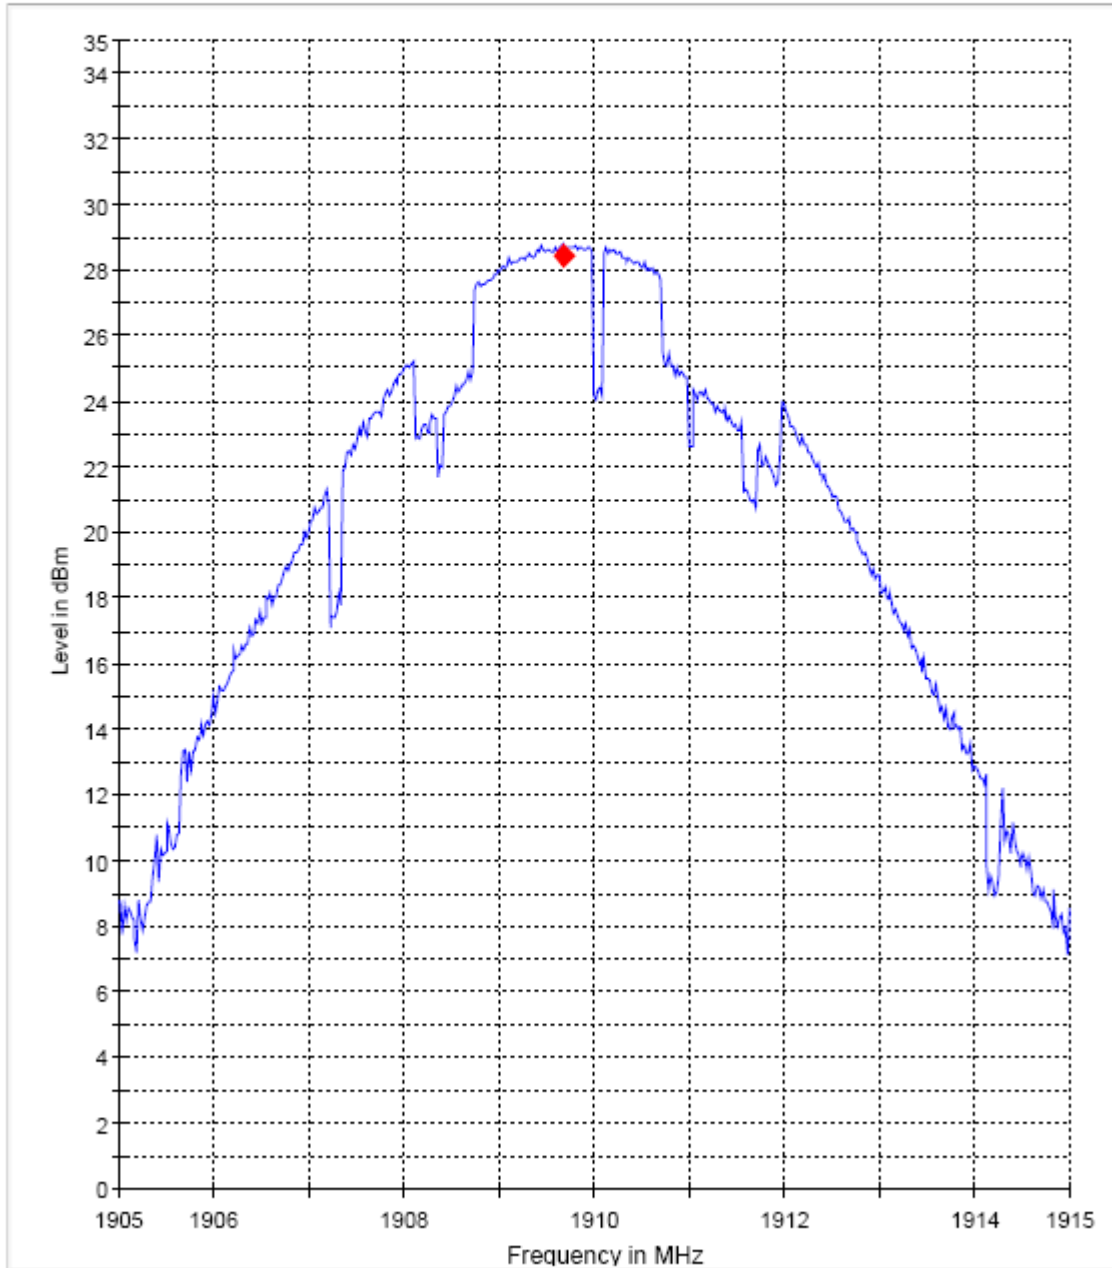

— Preview Result 1      ◆ Final Result 1




**EIRP (EGPRS 1900) CHANNEL 512 §24.232(b)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: EGPRS 1900  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

**SWEEP TABLE: "EIRP 1900 CH512"**

Short Description:		EIRP PCS 1900 for channel-512			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.8 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

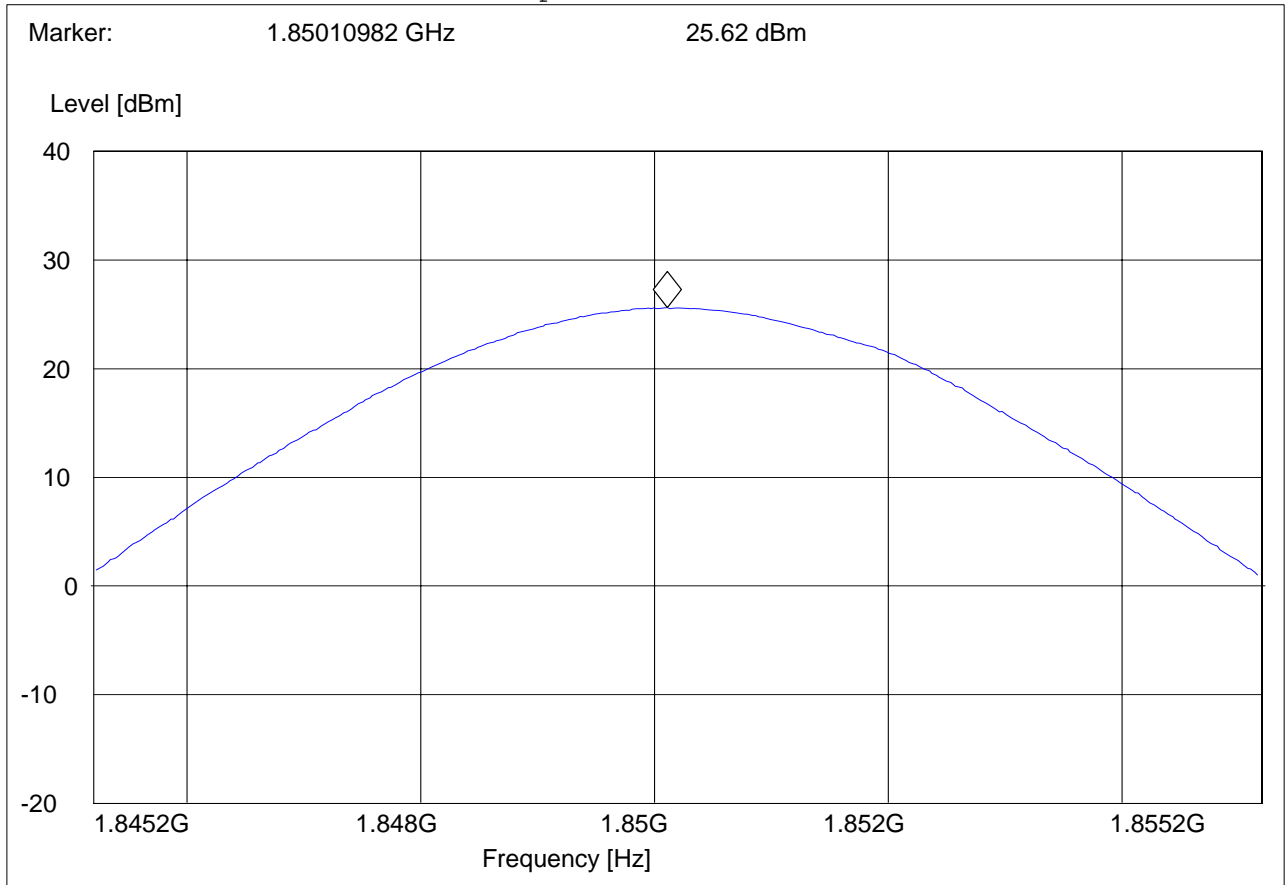




**EIRP (EGPRS 1900) CHANNEL 661 §24.232(b)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: EGPRS 1900  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

**SWEEP TABLE: "EIRP 1900 CH661"**

Short Description:		EIRP PCS 1900 for channel-661			
Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

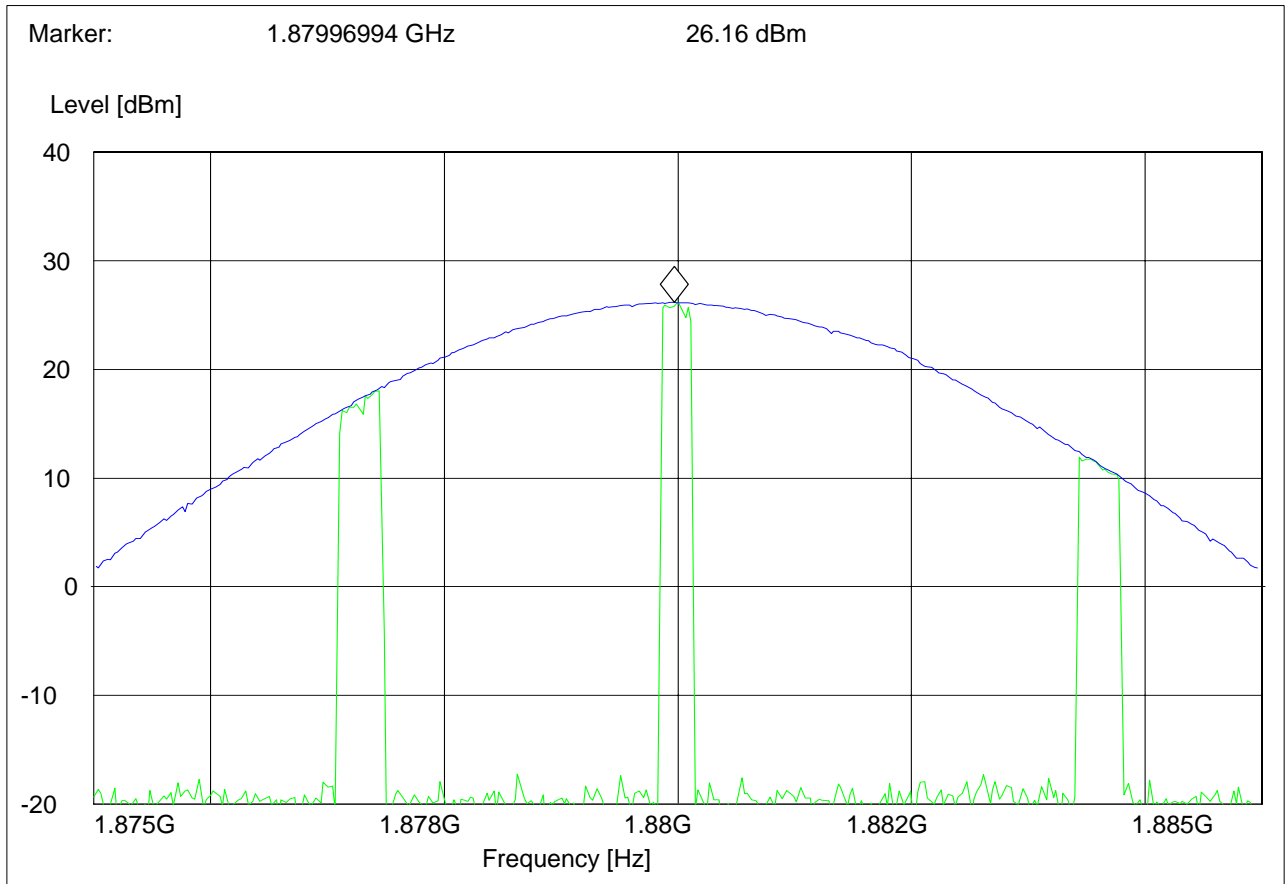




**EIRP (EGPRS 1900) CHANNEL 810 §24.232(b)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: EGPRS 1900  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

**SWEEP TABLE: "EIRP 1900 CH810"**

Short Description: EIRP PCS 1900 for channel-810  
 Start Stop Detector Meas. IF Transducer  
 Frequency Frequency Time Bandw.  
 1.9 GHz 1.9 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

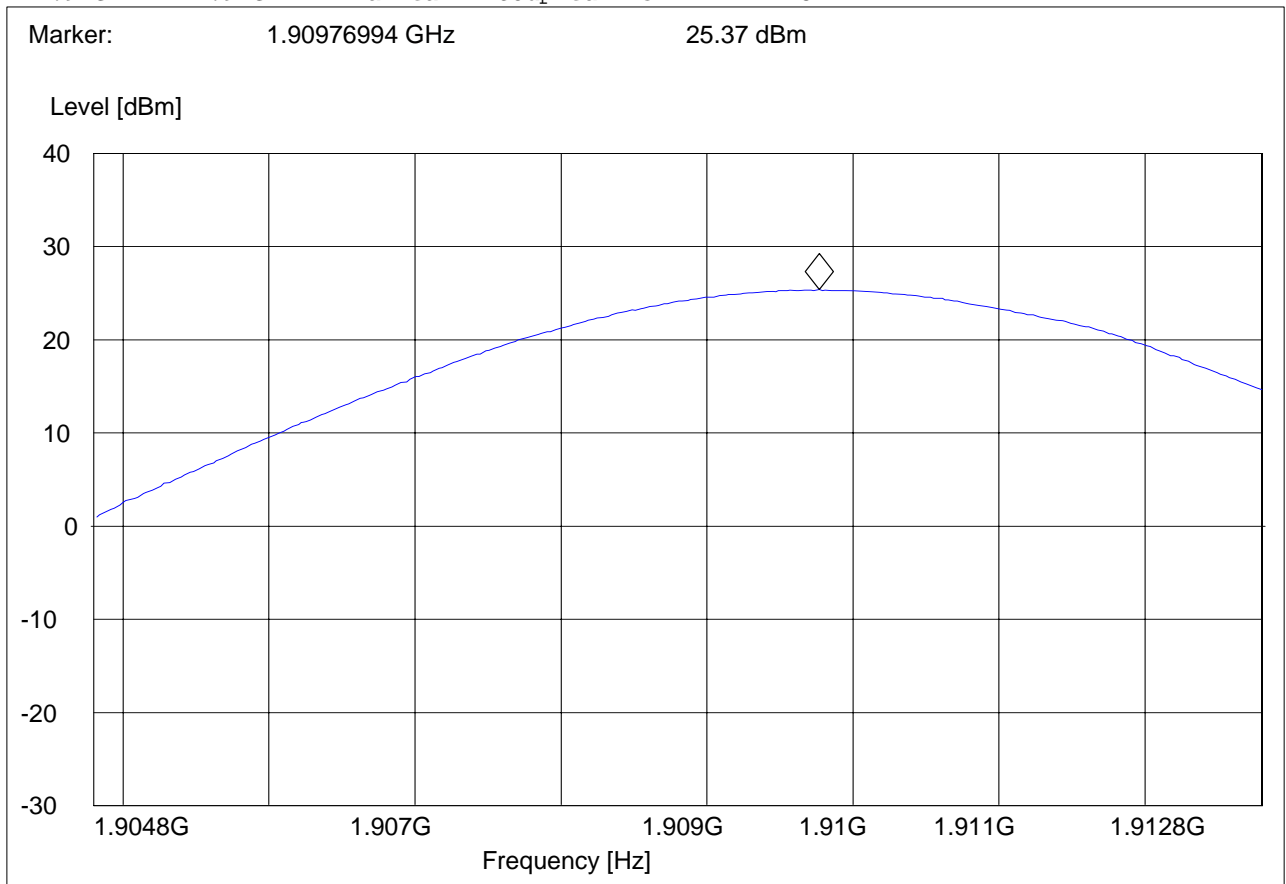




**EIRP (UMTS FDD2) CHANNEL 9262 §24.232(b)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

***SWEEP TABLE: "EIRP 1900 CH 9262"***

Short Description: EIRP PCS 1900 for channel-512

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.8 GHz	1.9 GHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM

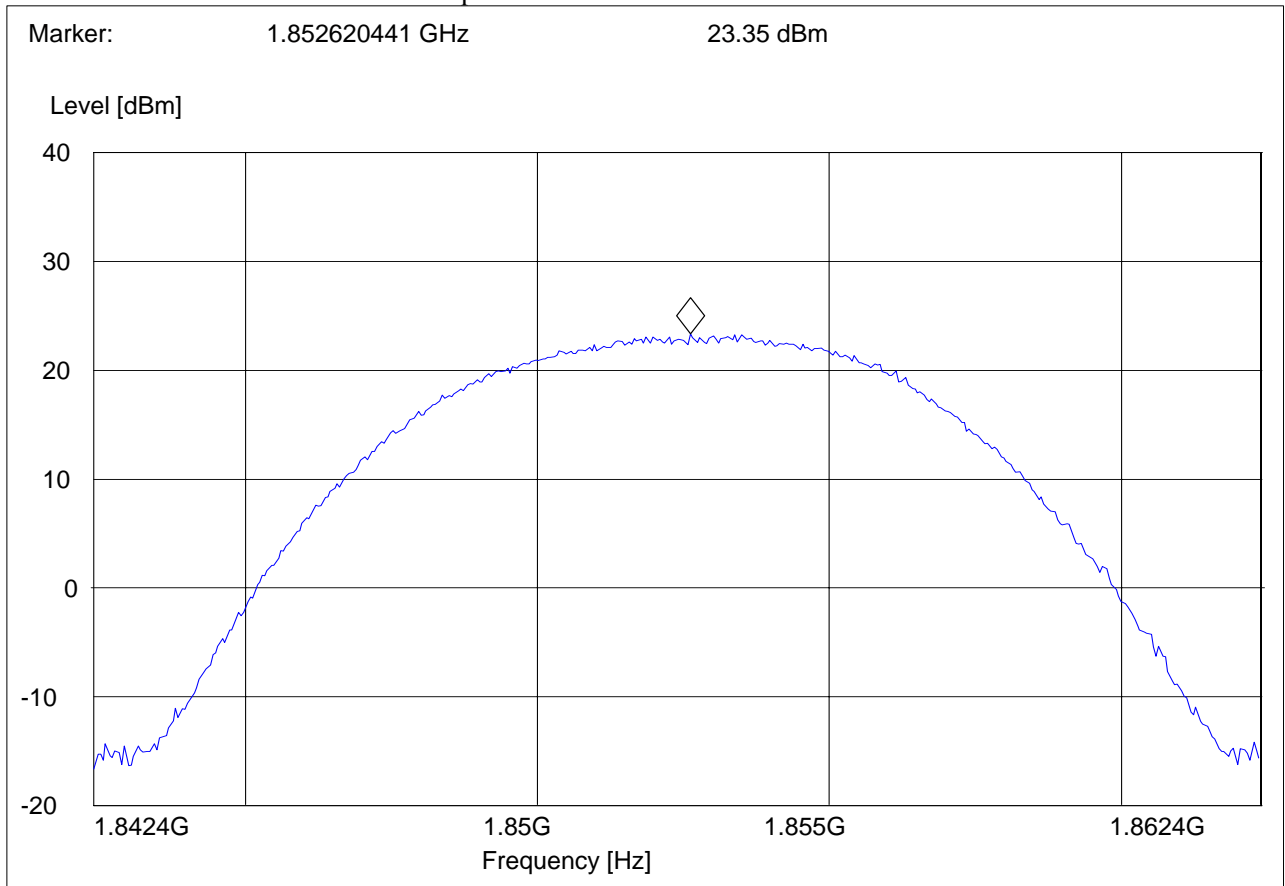




**EIRP (UMTS FDD2) CHANNEL 9400 §24.232(b)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

**SWEEP TABLE: "EIRP 1900 CH 9400"**

Short Description: EIRP PCS 1900 for channel-661  
 Start Stop Detector Meas. IF Transducer  
 Frequency Frequency Time Bandw.  
 1.9 GHz 1.9 GHz MaxPeak Coupled 5 MHz DUMMY-DBM  
 MaxPeak

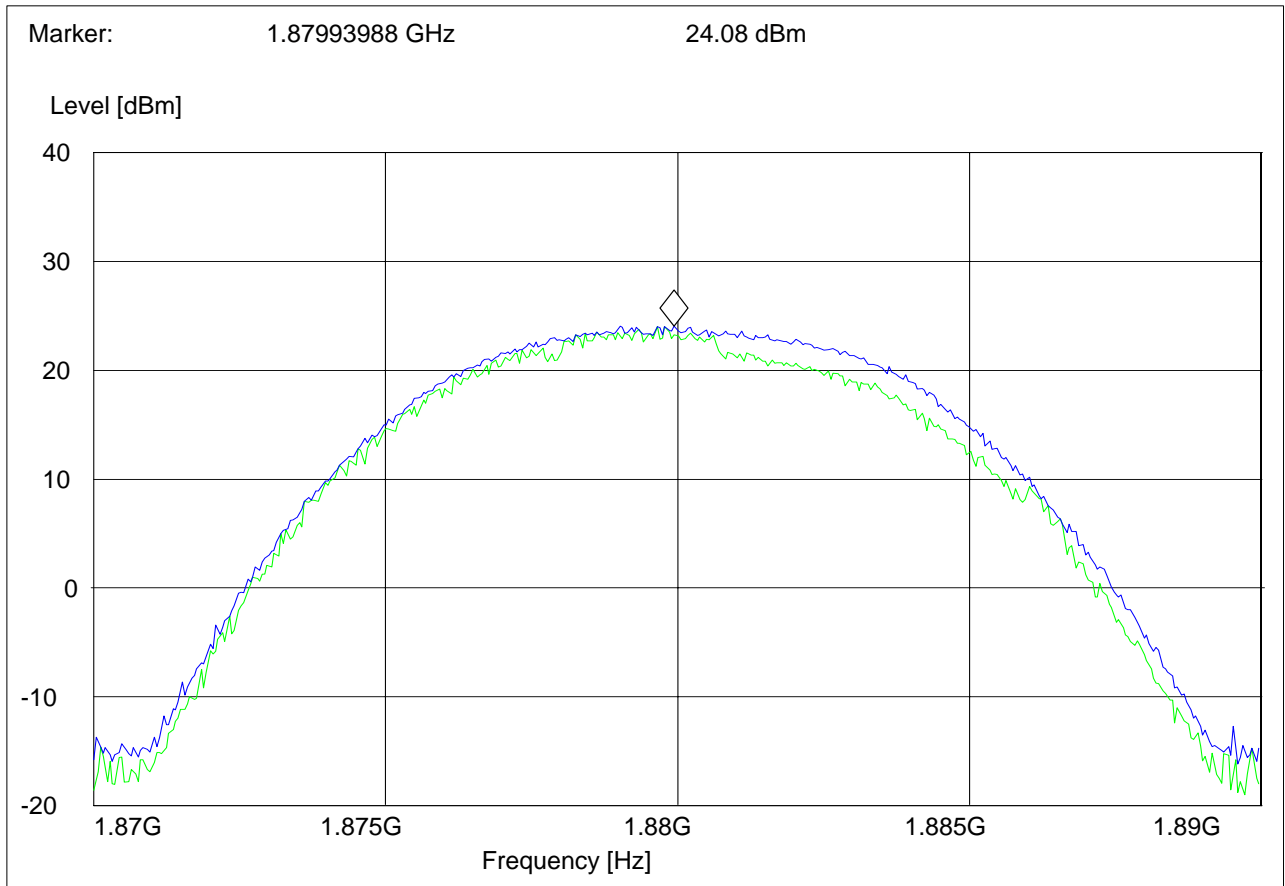




**EIRP (UMTS FDD2) CHANNEL 9538 §24.232(b)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: Internal Battery  
 Comments:

**SWEEP TABLE: "EIRP 1900 CH 9538"**

Short Description: EIRP PCS 1900 for channel-810  
 Start Stop Detector Meas. IF Transducer  
 Frequency Frequency Time Bandw.  
 1.9 GHz 1.9 GHz MaxPeak Coupled 5 MHz DUMMY-DBM

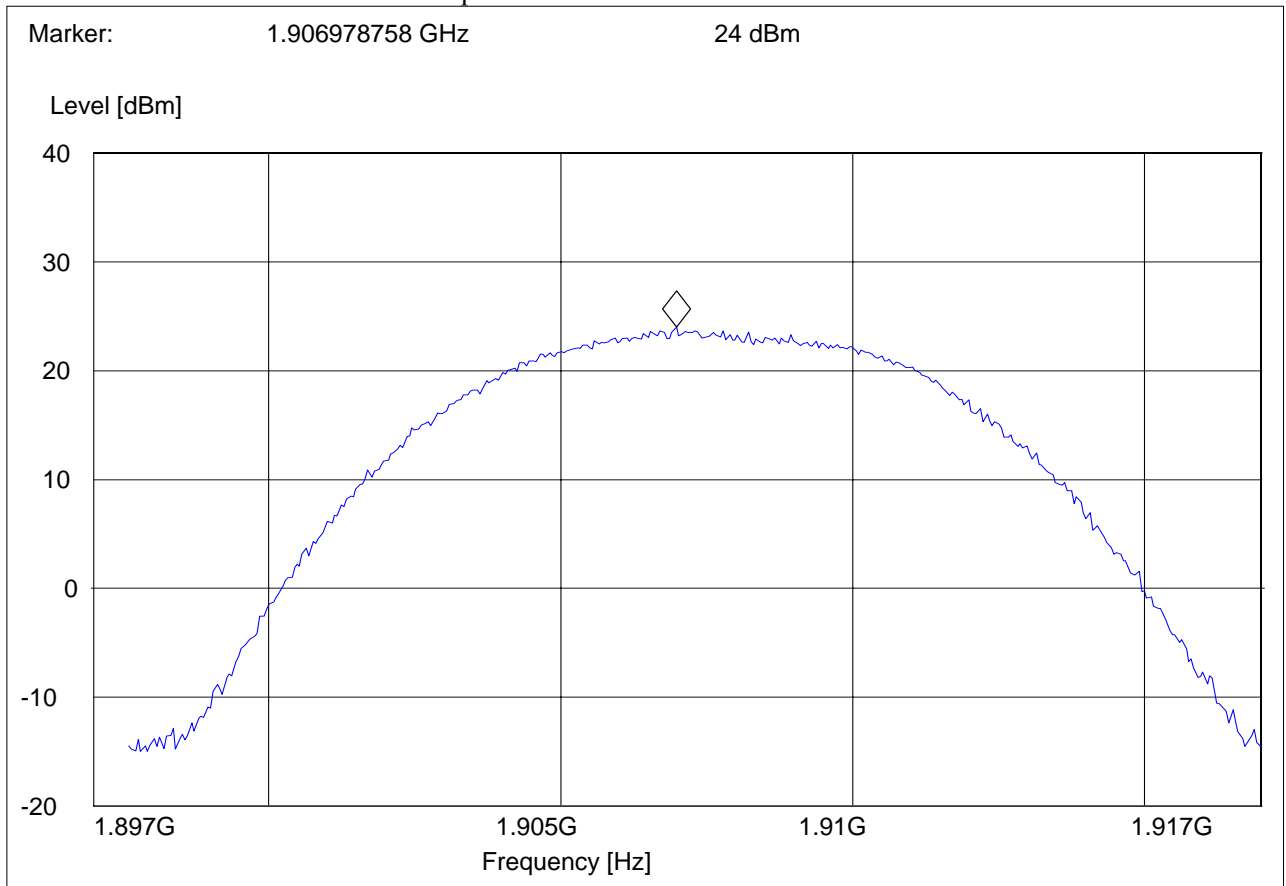




## 5.2 Occupied Bandwidth/Emission Bandwidth

### 5.2.1 FCC 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.

(h) Transmitters employing digital modulation techniques-when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated.

### 5.2.2 Occupied / emission bandwidth measurement procedure:

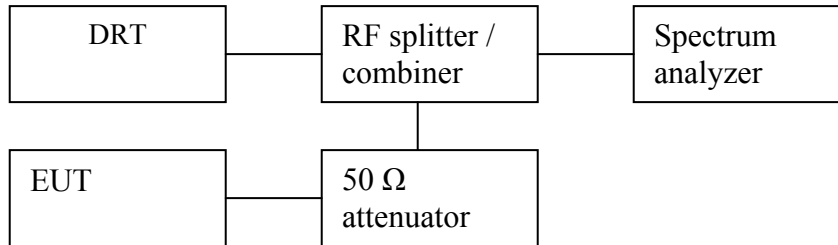

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure the 99% (-20 dB) occupied bandwidth. Record the value.
4. Set the spectrum analyzer to measure the 99.5% (-26 dB) emission bandwidth. Record the value.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

**5.2.3 Occupied bandwidth results 850 MHz band.**

Frequency (MHz)	Occupied Bandwidth (kHz)	
	GSM	EGPRS
824.2	246.493	246.493
836.6	252.505	240.481
848.8	240.481	240.481

Frequency (MHz)	Occupied Bandwidth (MHz)
	UMTS FDD5
836.4	4.168
836.6	4.148
846.6	4.188

**5.2.4 Occupied bandwidth results 1900 MHz band:**

Frequency (MHz)	Occupied Bandwidth (kHz)	
	GSM	EGPRS
1850.2	244.489	244.489
1880.0	240.481	236.473
1909.8	242.485	240.481

Frequency (MHz)	Occupied Bandwidth (MHz)
	UMTS FDD2
1852.4	4.168
1880	4.148
1907.6	4.148

**5.2.5 Emission bandwidth results 850 MHz band.**

Frequency (MHz)	Occupied Bandwidth (kHz)	
	GSM	EGPRS
824.2	300.661	318.637
836.6	306.613	312.625
848.8	312.625	306.613

Frequency (MHz)	Emission Bandwidth (MHz)
	UMTS FDD5
836.4	4.689
836.6	4.709
846.6	4.709

**5.2.6 Emission bandwidth results 1900 MHz band:**


Frequency (MHz)	Occupied Bandwidth (kHz)	
	GSM	EGPRS
1850.2	298.597	304.609
1880.0	300.601	296.593
1909.8	312.625	302.605

Frequency (MHz)	Emission Bandwidth (MHz)
	UMTS FDD2
1852.4	4.629
1880	4.669
1907.6	4.669

**Occupied band Width GSM850 MHz Channel 128 GSM**




Marker 1 [T1] RBW 3 kHz RF Att 40 dB  
 Ref Lvl -43.06 dBm VBW 3 MHz  
 34.7 dBm 825.70000000 MHz SWT 840 ms Unit dBm

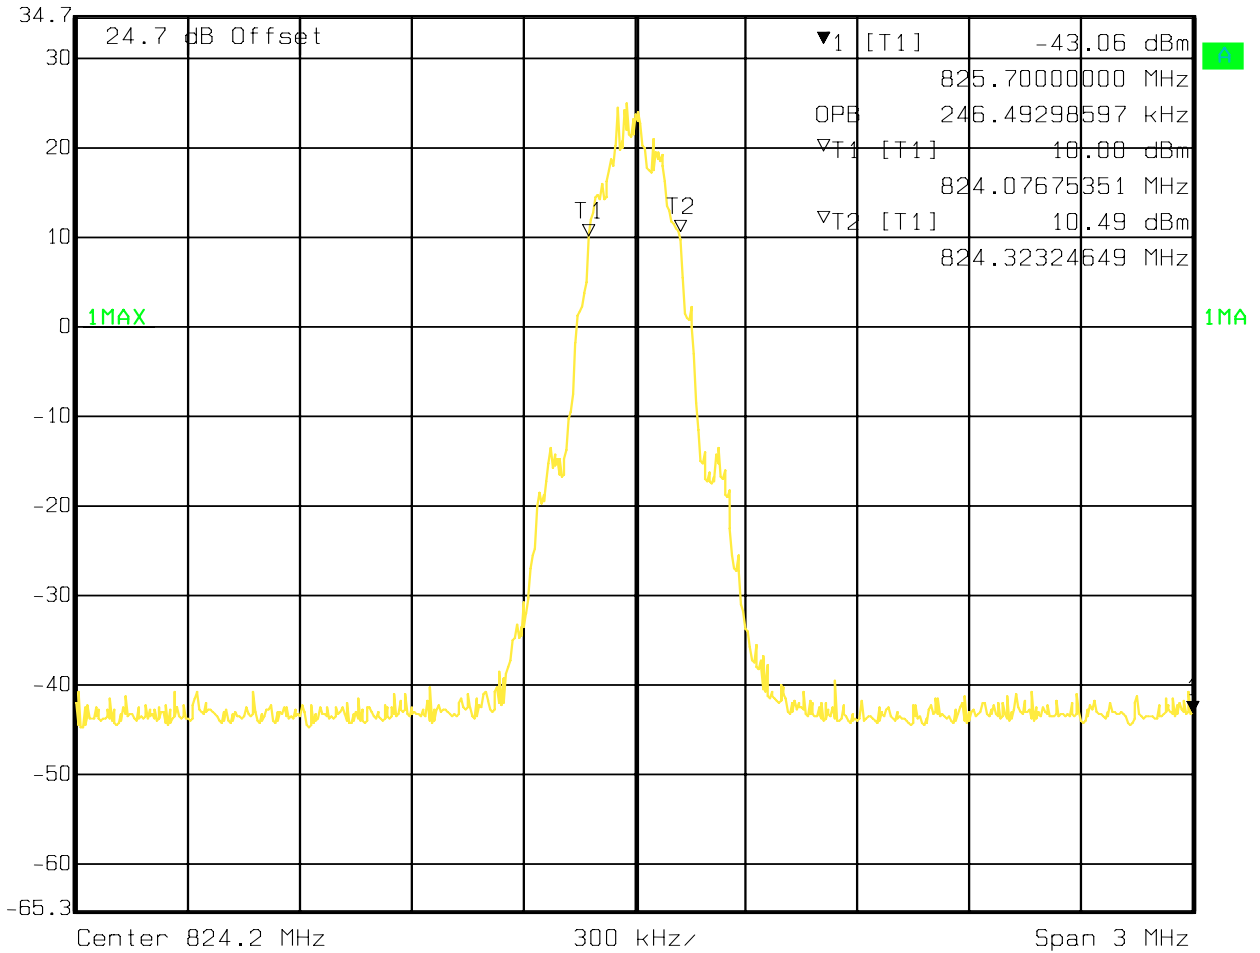

Date: 11.MAY 2009 09:56:44

**Occupied band Width GSM850 MHz Channel 190 GSM**


Marker 1 [T1]
RBW 3 kHz
RF Att 40 dB  
Ref Lvl -42.52 dBm
VBW 3 MHz  
34.7 dBm
838.10000000 MHz
SWT 840 ms
Unit dBm

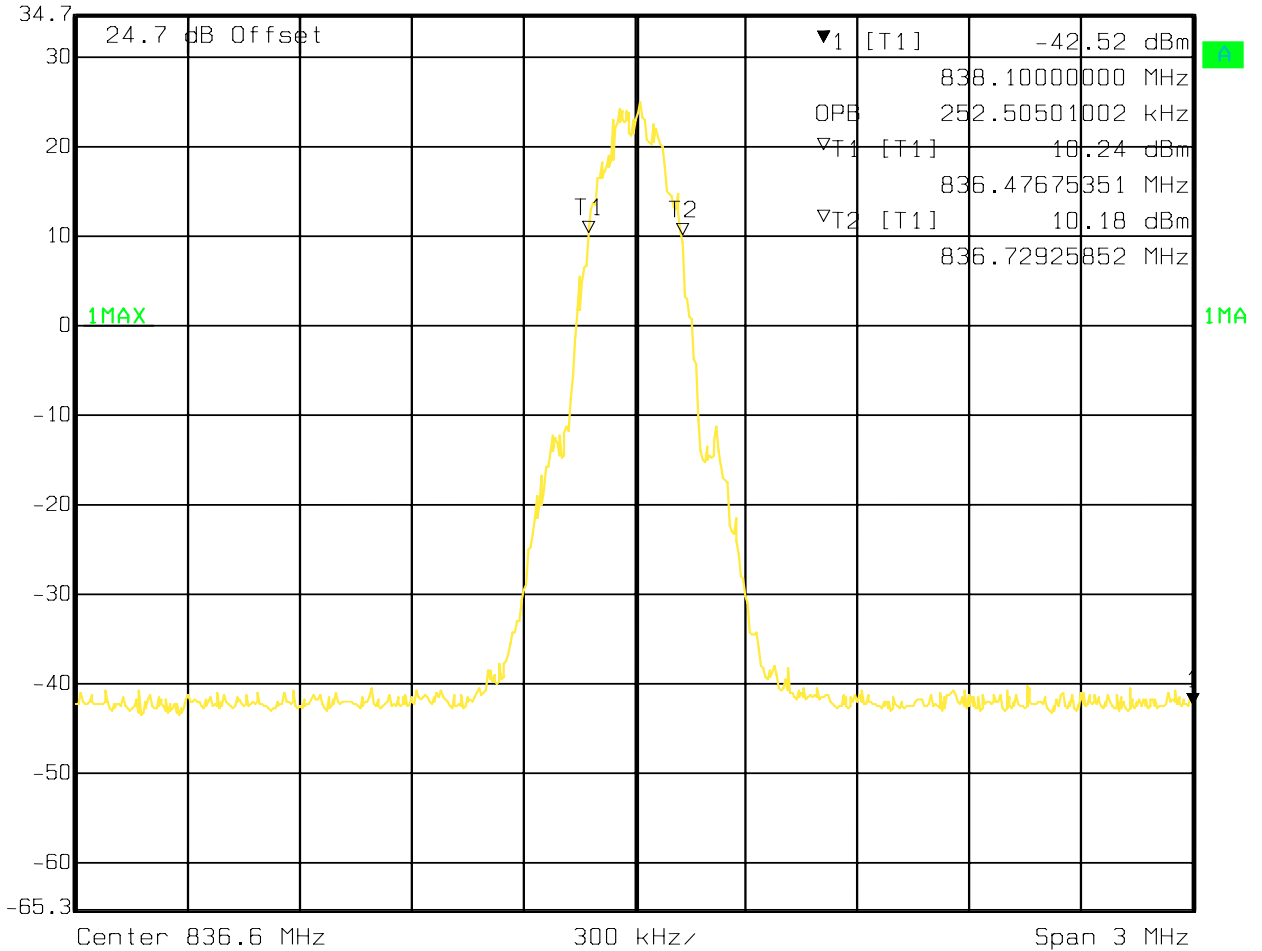

Date: 11.MAY 2009 09:58:45


**Occupied band Width GSM850 MHz Channel 251 GSM**


 Marker 1 [T1] RBW 3 kHz RF Att 40 dB  
 Ref Lvl -42.15 dBm VBW 3 MHz  
 34.7 dBm 847.30000000 MHz SWT 840 ms Unit dBm

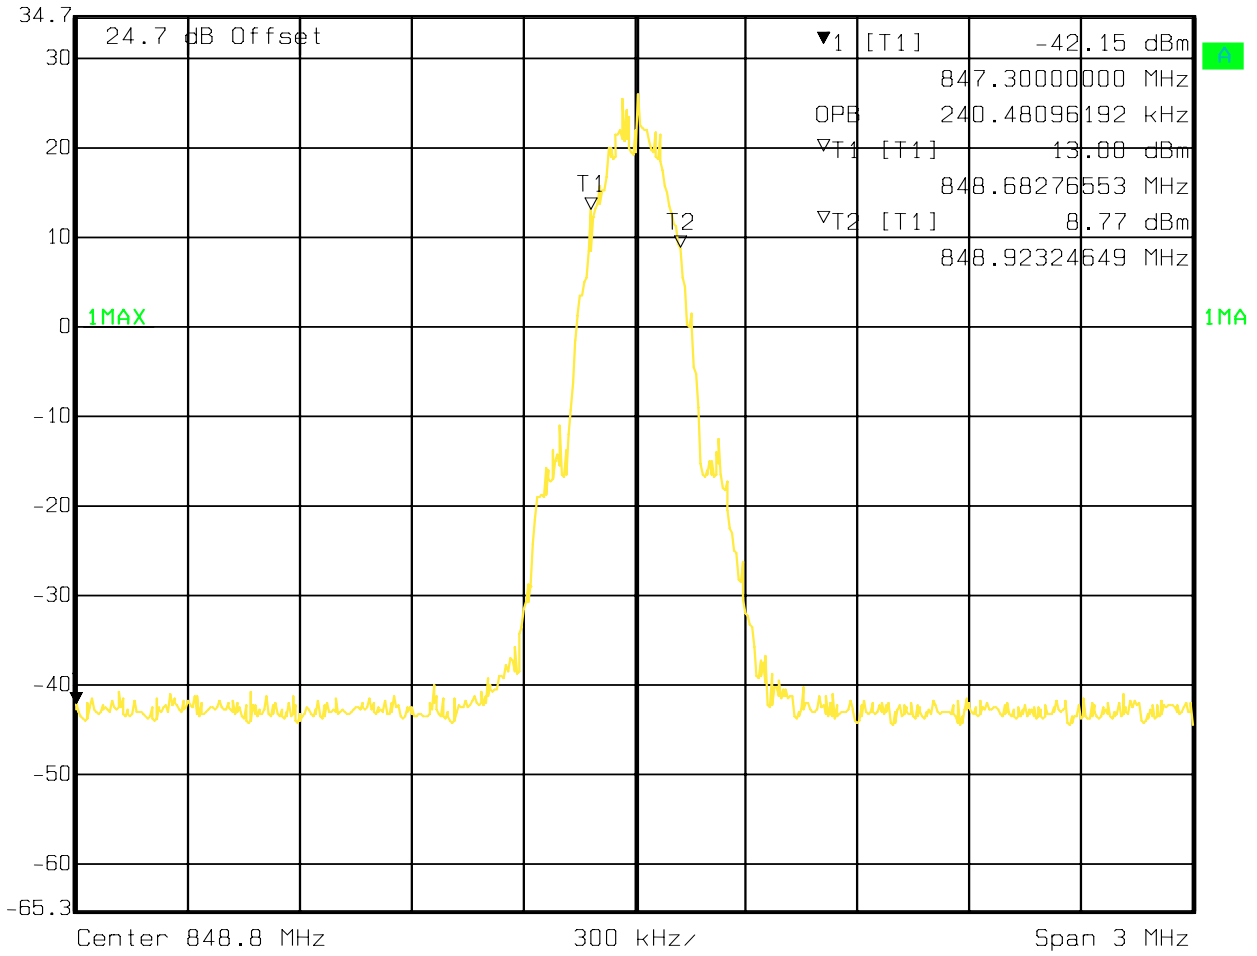

Date: 11.MAY 2009 09:59:34


**Occupied band Width GSM850 MHz Channel 128 EGPRS**

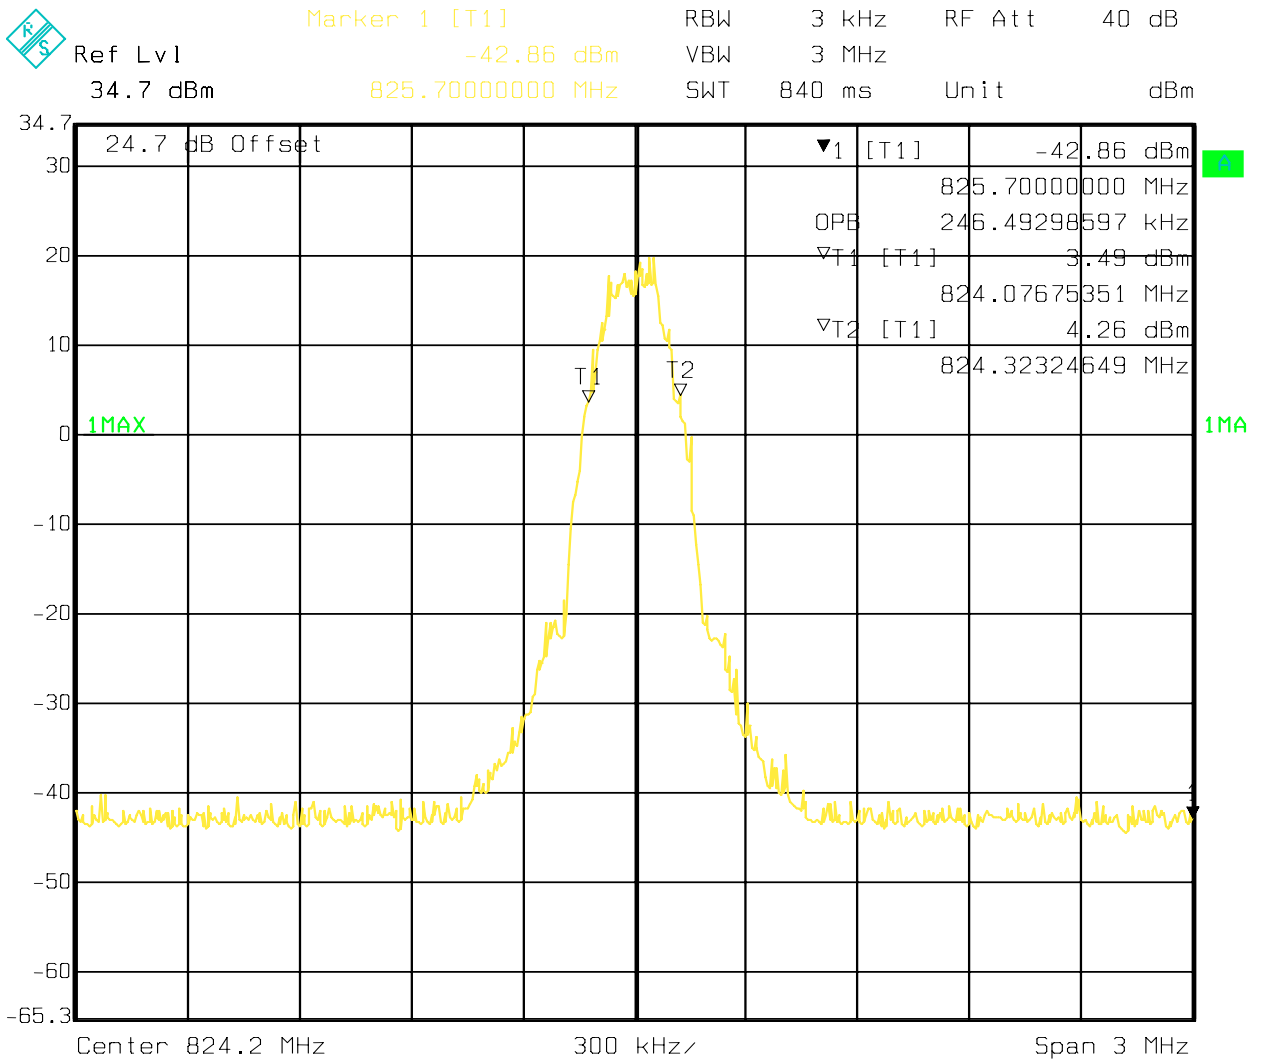

Date: 11.MAY 2009 09:55:48

**Occupied band Width GSM850 MHz Channel 190 EGPRS**

◆ RS      Marker 1 [T1]      RBW 3 kHz      RF Att 40 dB  
 Ref Lvl -42.87 dBm      VBW 3 MHz  
 34.7 dBm      838.1000000 MHz      SWT 840 ms      Unit dBm

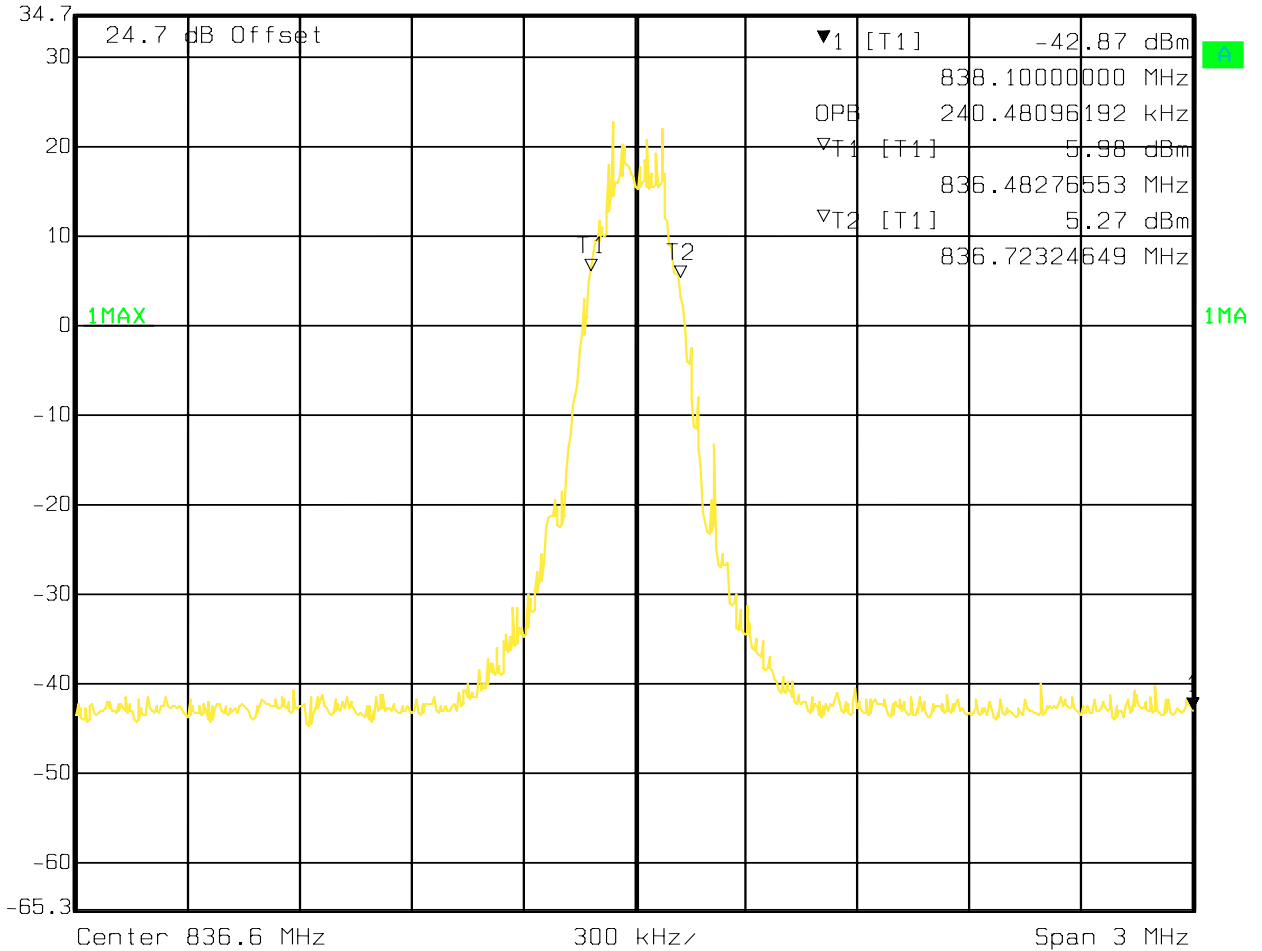


Date: 11.MAY 2009 09:54:55



**Occupied band Width GSM850 MHz Channel 251 EGPRS**


◆ Marker 1 [T1] RBW 3 kHz RF Att 40 dB  
 Ref Lvl 20.28 dBm VBW 3 MHz  
 34.7 dBm 848.79699399 MHz SWT 840 ms Unit dBm

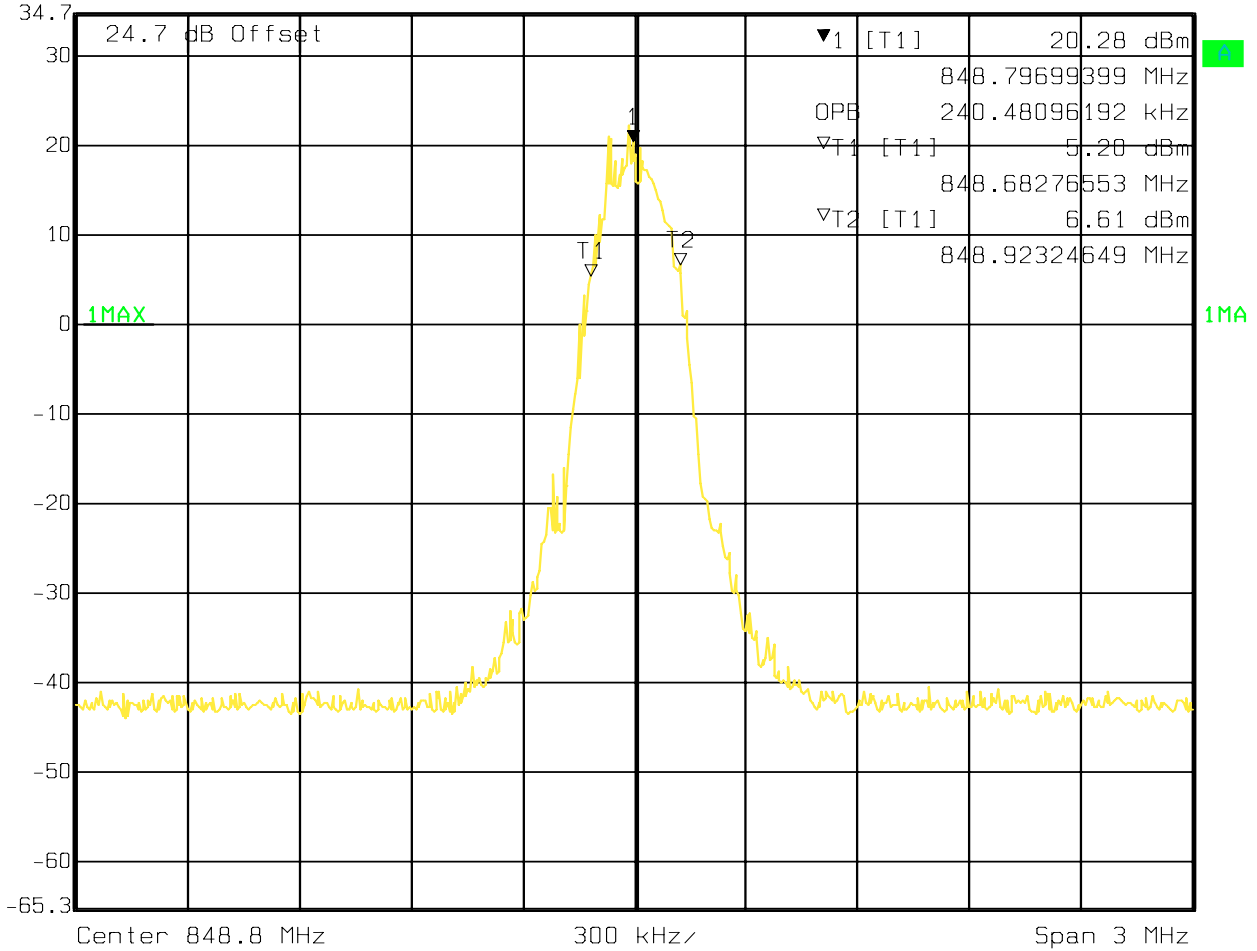

Date: 11.MAY 2009 09:53:50

**Occupied band Width UMTS FDD5 Channel 4132**


◆ S Marker 1 [T1] RBW 50 kHz RF Att 50 dB  
 Ref Lvl 15.94 dBm VBW 50 kHz  
 44.7 dBm 826.95110220 MHz SWT 10 ms Unit dBm

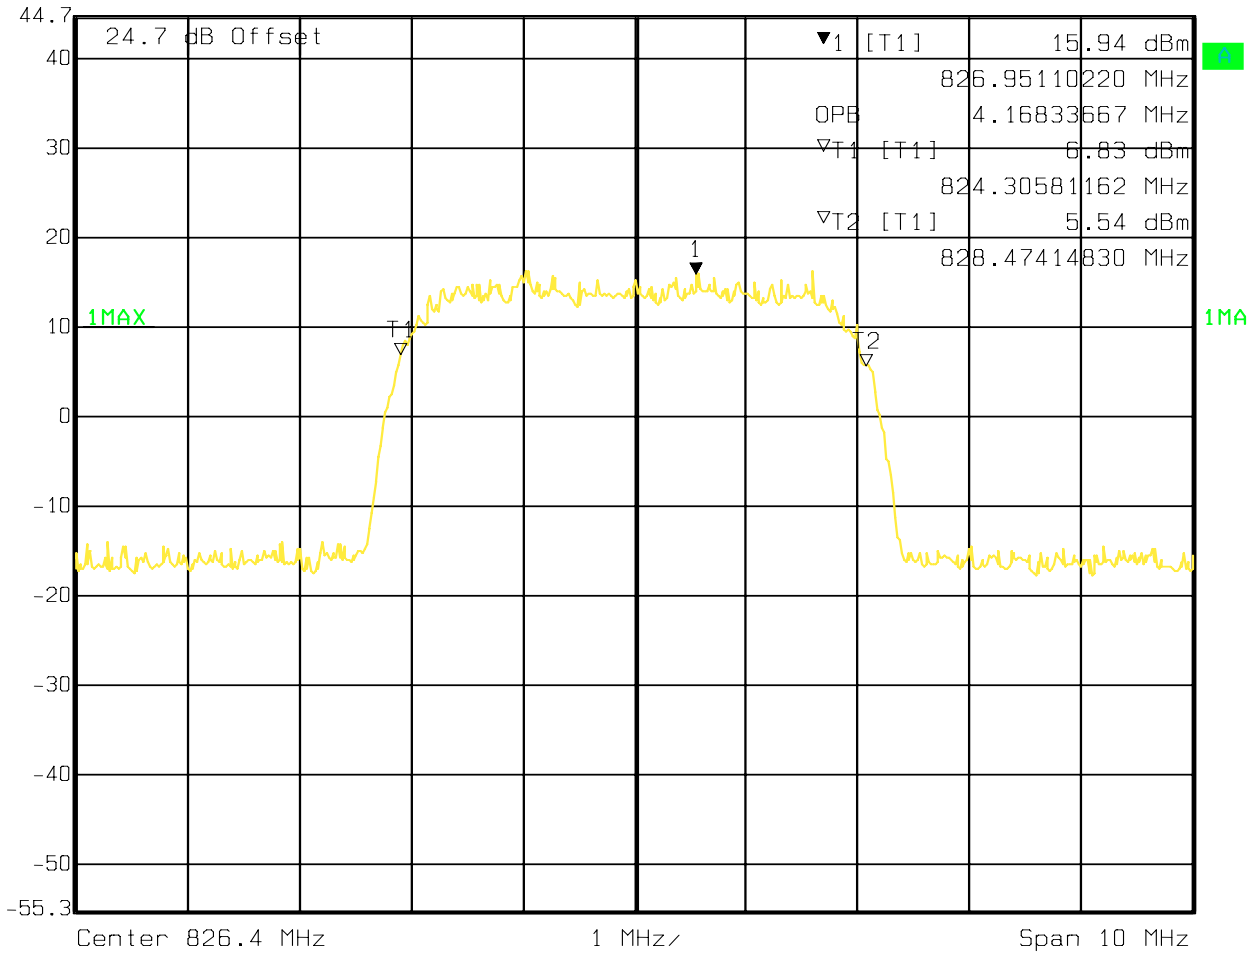

Date: 11.MAY 2009 12:30:36

**Occupied band Width UMTS FDD5 Channel 4183**


◆ S Marker 1 [T1] RBW 50 kHz RF Att 50 dB  
 Ref Lvl 14.95 dBm VBW 50 kHz  
 44.7 dBm 836.29258517 MHz SWT 10 ms Unit dBm

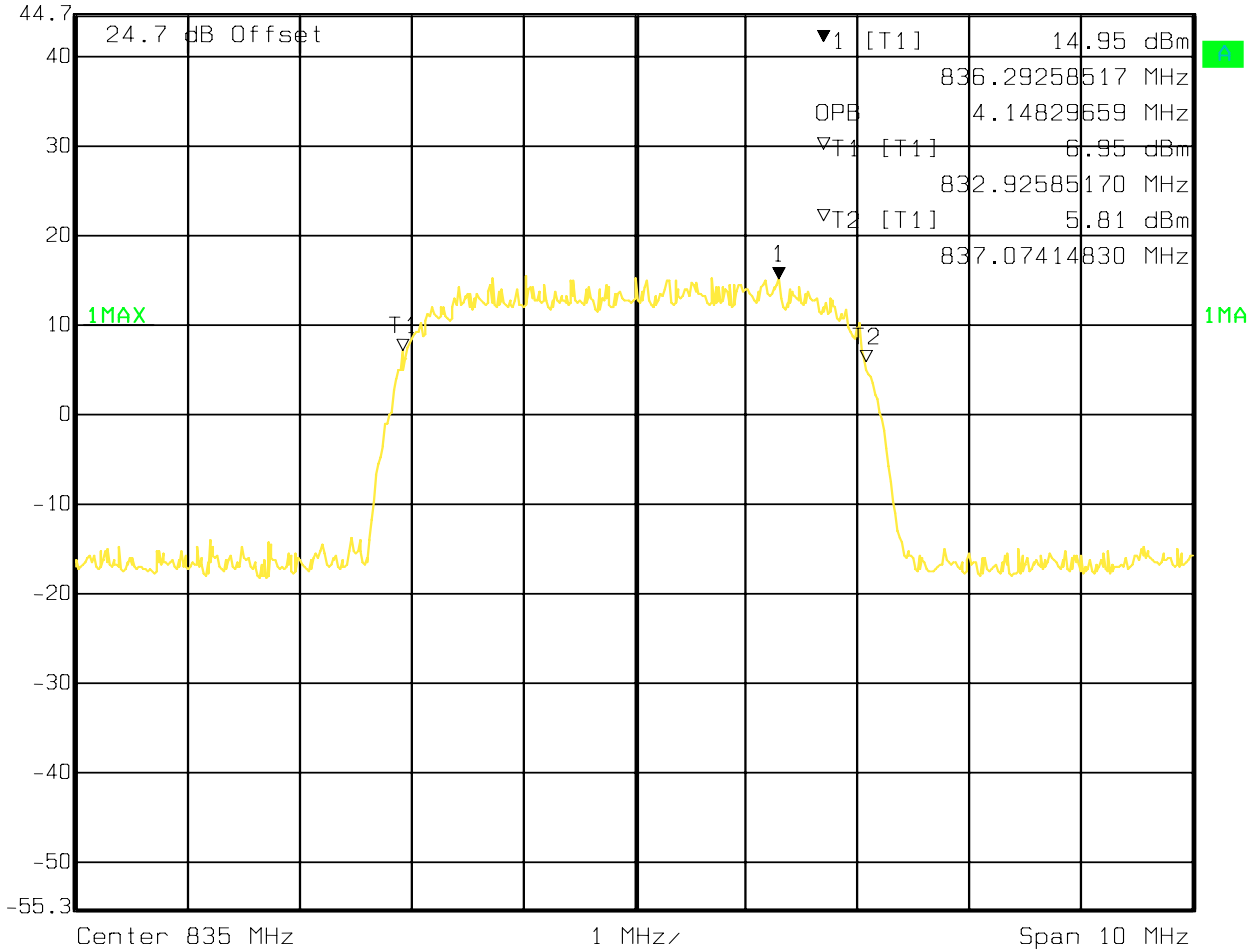

Date: 11.MAY 2009 12:31:26

**Occupied band Width UMTS FDD5 Channel 4233**

◆ S Marker 1 [T1] RBW 50 kHz RF Att 50 dB  
 Ref Lvl 16.22 dBm VBW 50 kHz  
 44.7 dBm 847.17114228 MHz SWT 10 ms Unit dBm

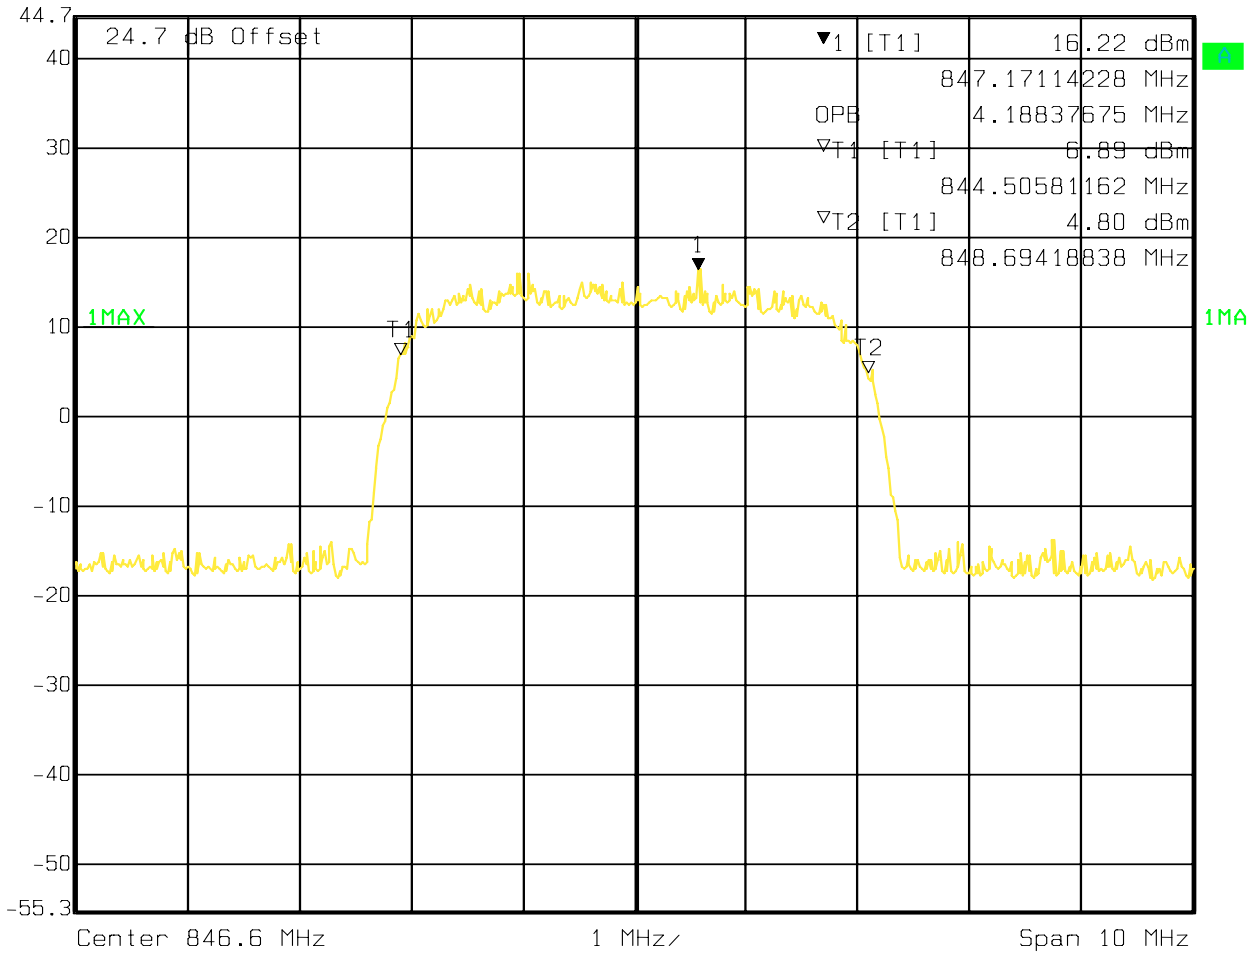


Date: 11.MAY 2009 12:32:21

**Occupied band Width PCS1900 MHz Channel 512 GSM**




Marker: 1 [T1] RBW 3 kHz RF Att 30 dB  
 Ref Lvl -49.32 dBm VBW 3 kHz  
 34.7 dBm 1.85070000 GHz SWT 280 ms Unit dBm

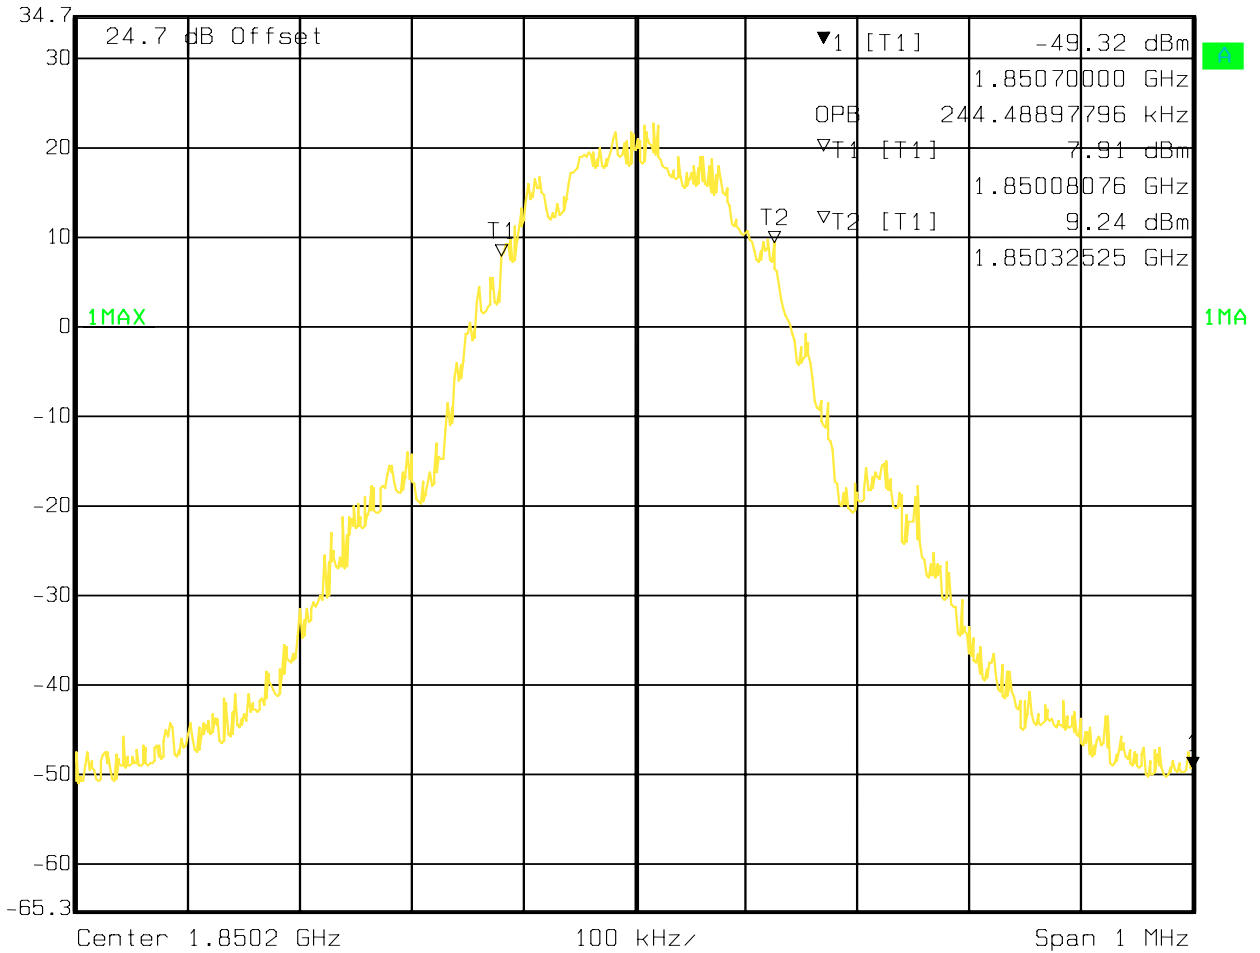

Date: 11.MAY 2009 10:51:18

**Occupied band Width PCS1900 MHz Channel 661 GSM**


Marker 1 [T1]
RBW 3 kHz
RF Att 30 dB  
Ref Lvl -51.94 dBm
VBW 3 kHz  
34.7 dBm
1.88050000 GHz
SWT 280 ms
Unit dBm

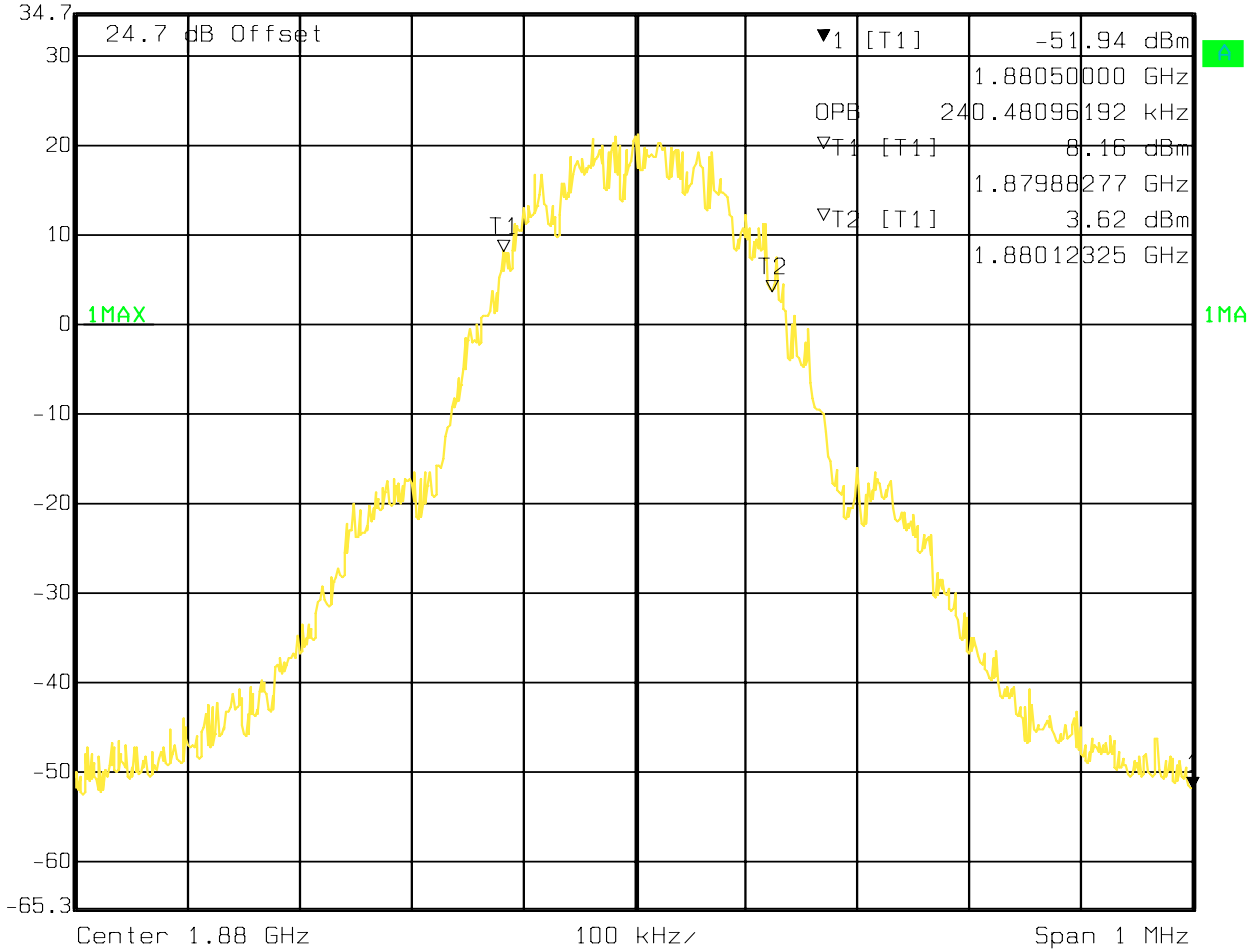


Date: 11.MAY 2009 10:52:02

**Occupied band Width PCS1900 MHz Channel 810 GSM**




Marker: 1 [T1] RBW 3 kHz RF Att 30 dB  
 Ref Lvl -49.51 dBm VBW 3 kHz  
 34.7 dBm 1.90930000 GHz SWT 280 ms Unit dBm

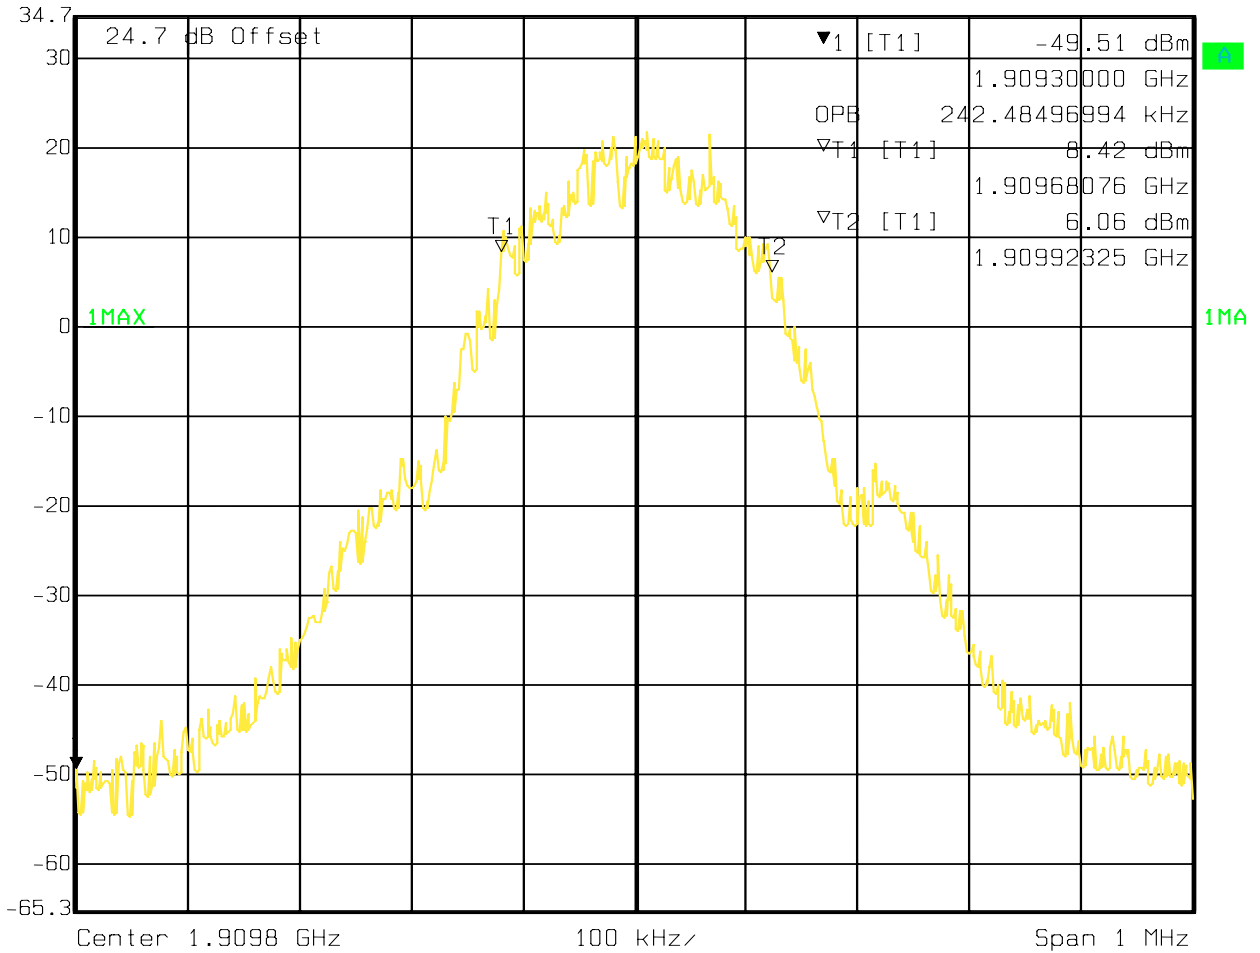

Date: 11.MAY 2009 10:52:47

**Occupied band Width PCS1900 MHz Channel 512 EGPRS**

◆ Marker 1 [T1] RBW 3 kHz RF Att 30 dB  
 Ref Lvl -53.28 dBm VBW 3 kHz  
 34.7 dBm 1.85070000 GHz SWT 280 ms Unit dBm

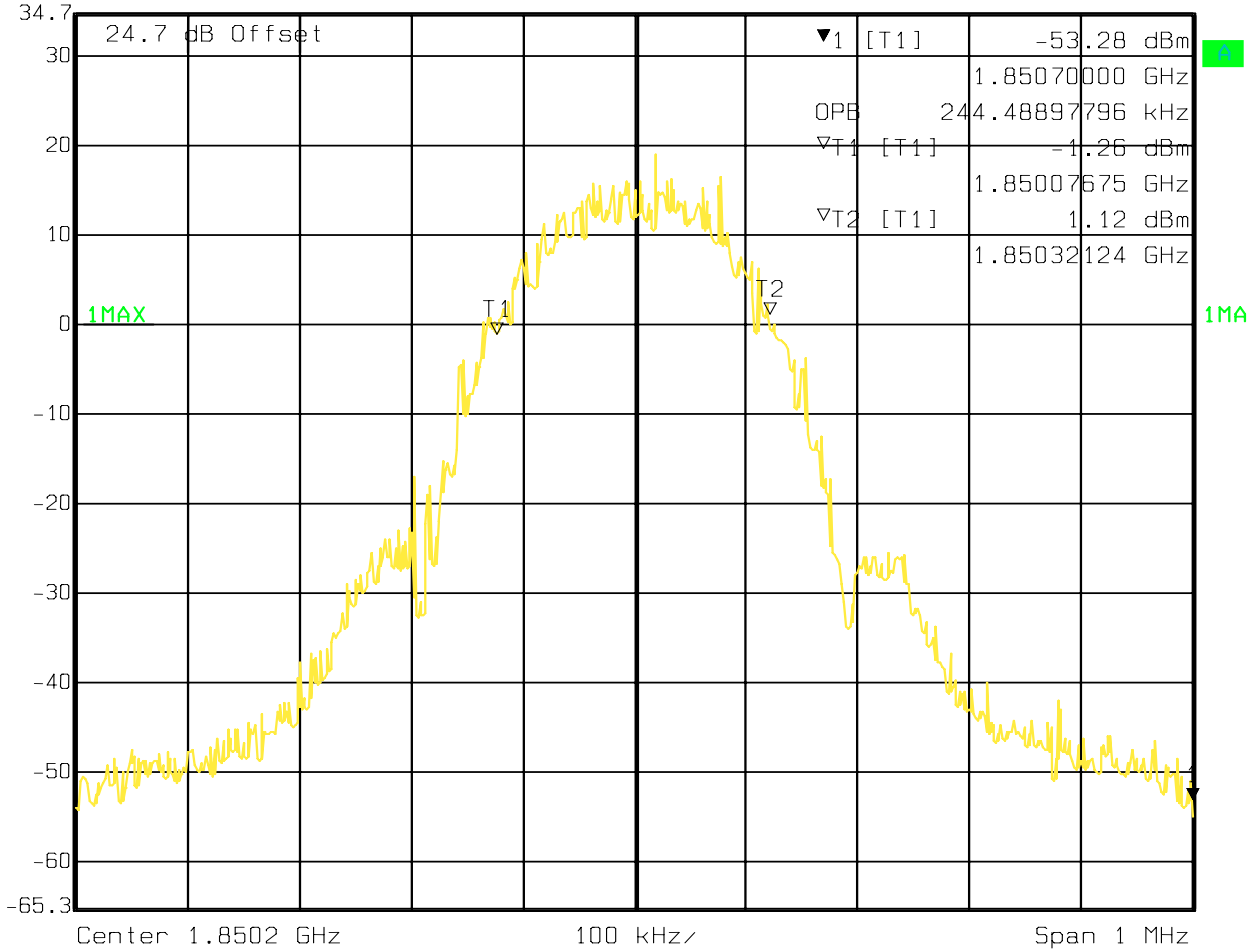


Date: 11.MAY 2009 10:50:17



**Occupied band Width PCS1900 MHz Channel 661 EGPRS**



Marker 1 [T1]
RBW 3 kHz
RF Att 30 dB  
Ref Lvl -50.99 dBm
VBW 3 kHz  
34.7 dBm
1.88050000 GHz
SWT 280 ms
Unit dBm

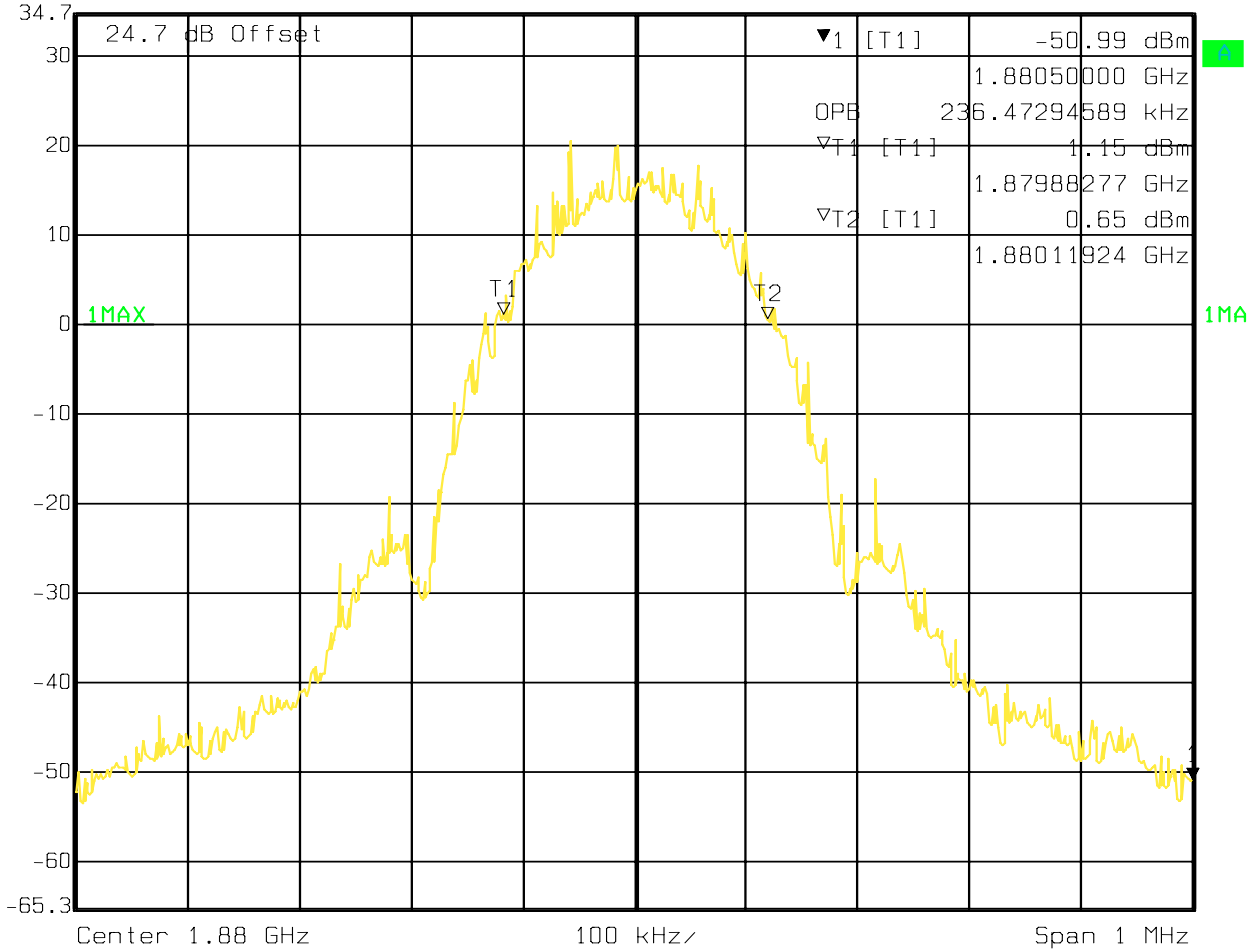

Date: 11.MAY 2009 10:49:27

**Occupied band Width PCS1900 MHz Channel 810 EGPRS**



Marker 1 [T1]
RBW 3 kHz RF Att 30 dB  
Ref Lvl 19.10 dBm
VBW 3 kHz  
34.7 dBm
1.90985311 GHz
SWT 280 ms Unit dBm

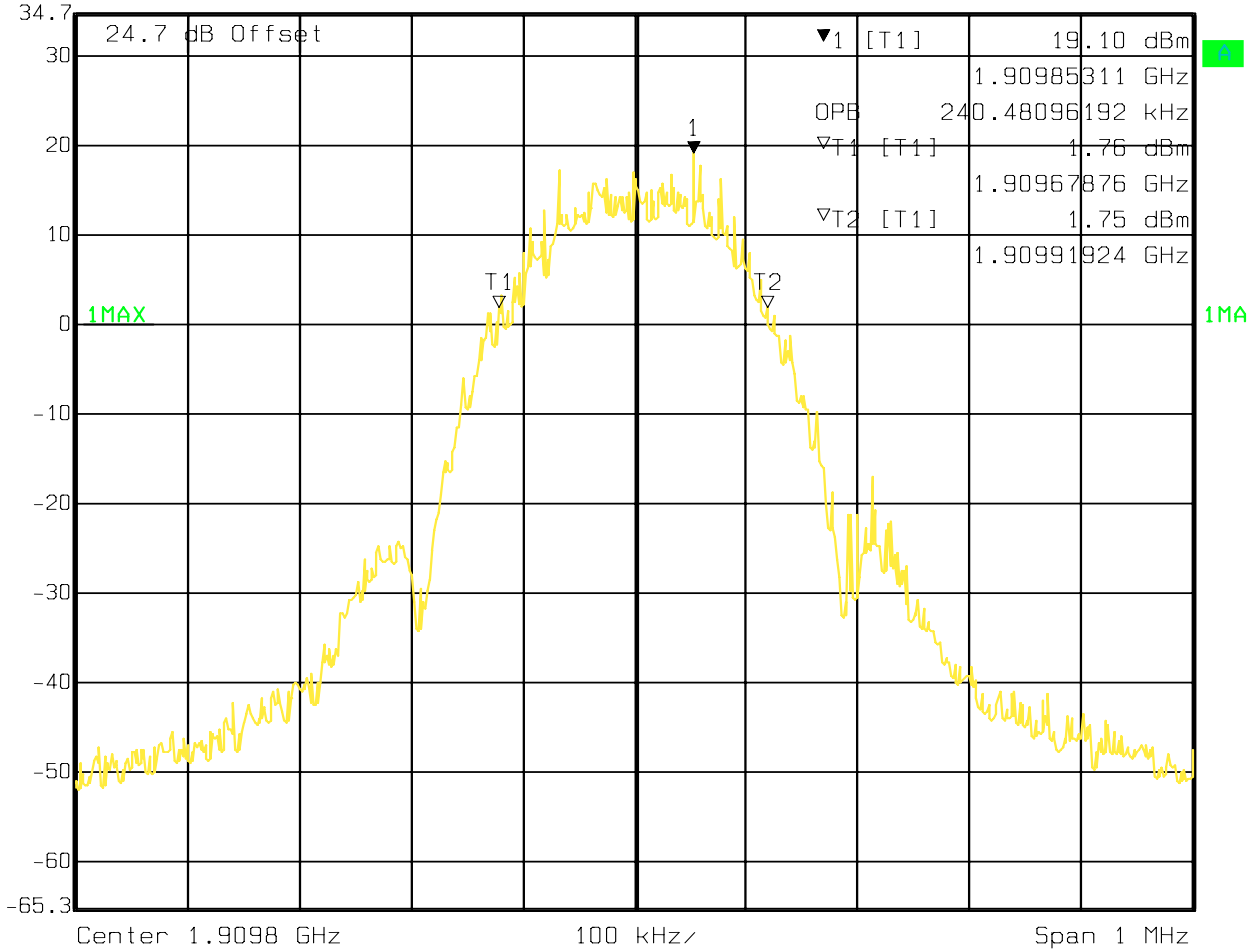

Date: 11.MAY 2009 10:48:07

**Occupied band Width UMTS FDD2 Channel 9262**



 Marker: 1 [T1] RBW 50 kHz RF Att 30 dB  
 Ref Lvl 14.19 dBm VBW 50 kHz  
 34.7 dBm 1.85301122 GHz SWT 10 ms Unit dBm

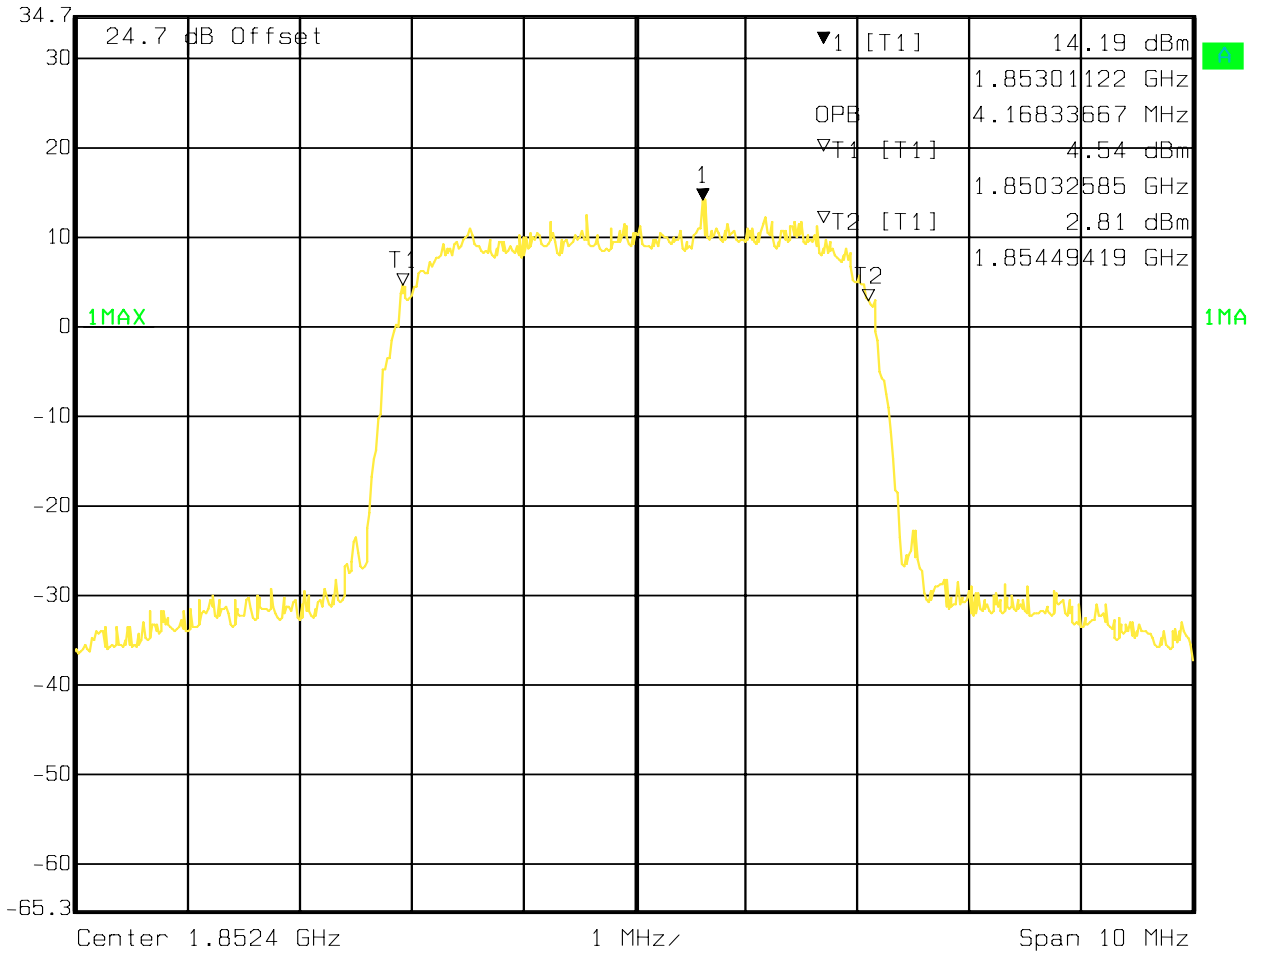

Date: 11.MAY 2009 11:46:17

**Occupied band Width UMTS FDD2 Channel 9400**


◆ S Marker 1 [T1] RBW 50 kHz RF Att 30 dB  
 Ref Lvl 12.97 dBm VBW 50 kHz  
 34.7 dBm 1.88059118 GHz SWT 10 ms Unit dBm

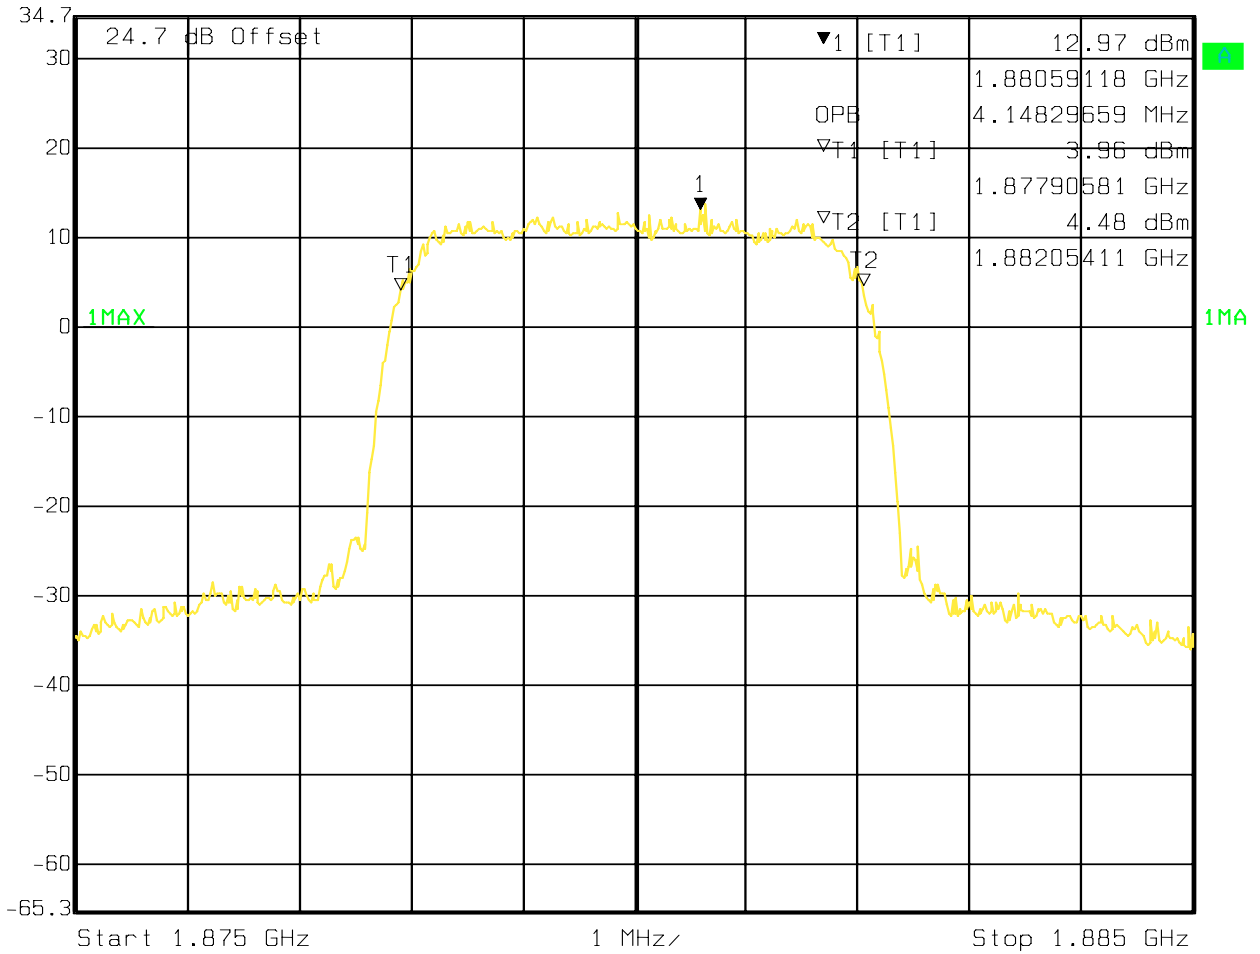

Date: 11.MAY 2009 11:45:37

**Occupied band Width UMTS FDD2 Channel 9538**

◆ S Marker 1 [T1] RBW 50 kHz RF Att 30 dB  
 Ref Lvl 11.65 dBm VBW 50 kHz  
 34.7 dBm 1.90654790 GHz SWT 10 ms Unit dBm

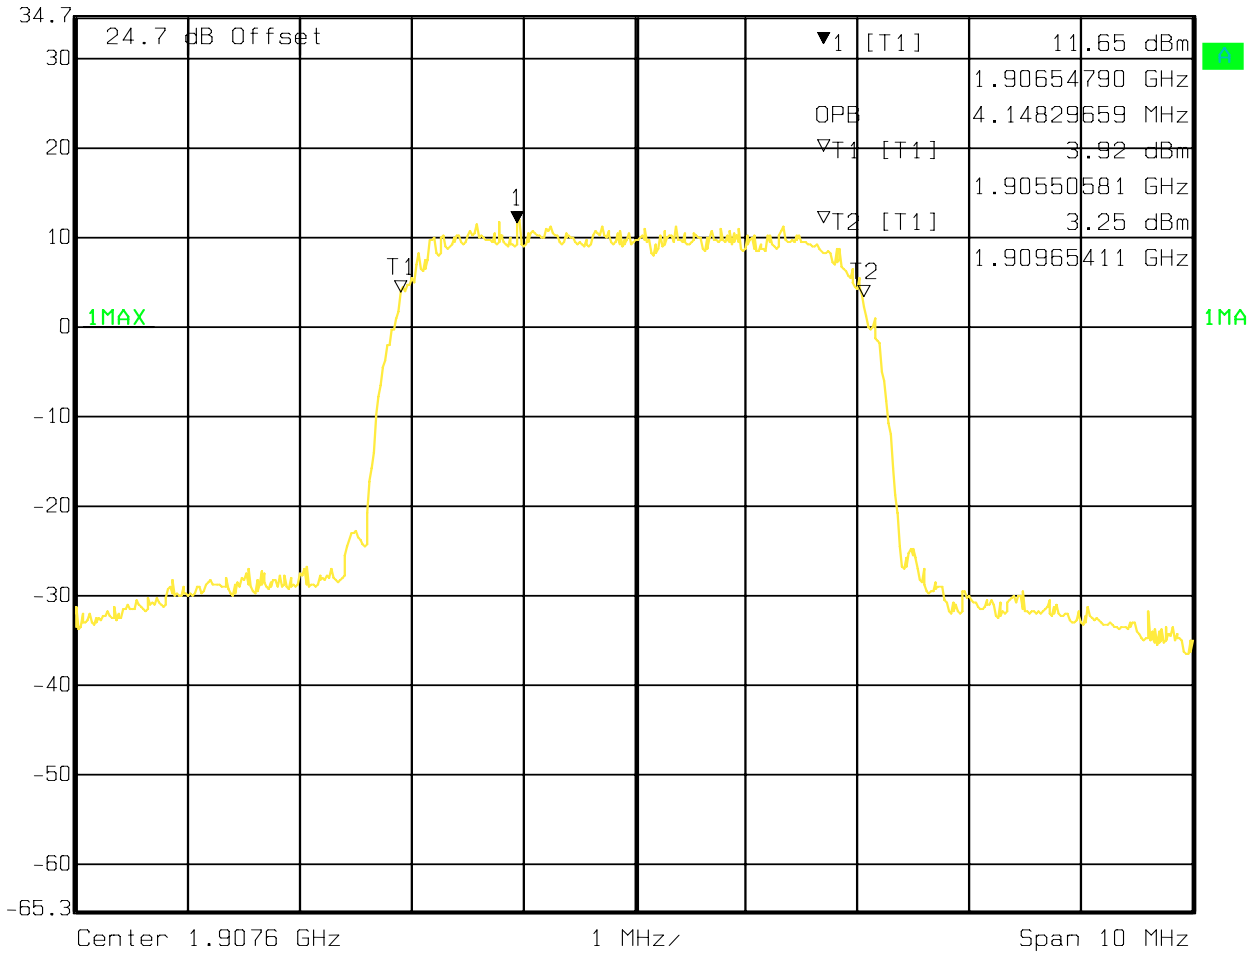


Date: 11.MAY 2009 11:44:23

**Emission band Width GSM850 MHz Channel 128 GSM**




Marker 1 [T1 ndB] RBW 3 kHz RF Att 40 dB  
 Ref Lvl ndB 26.00 dB VBW 3 MHz  
 34.7 dBm BW 300.60120240 kHz SWT 840 ms Unit dBm

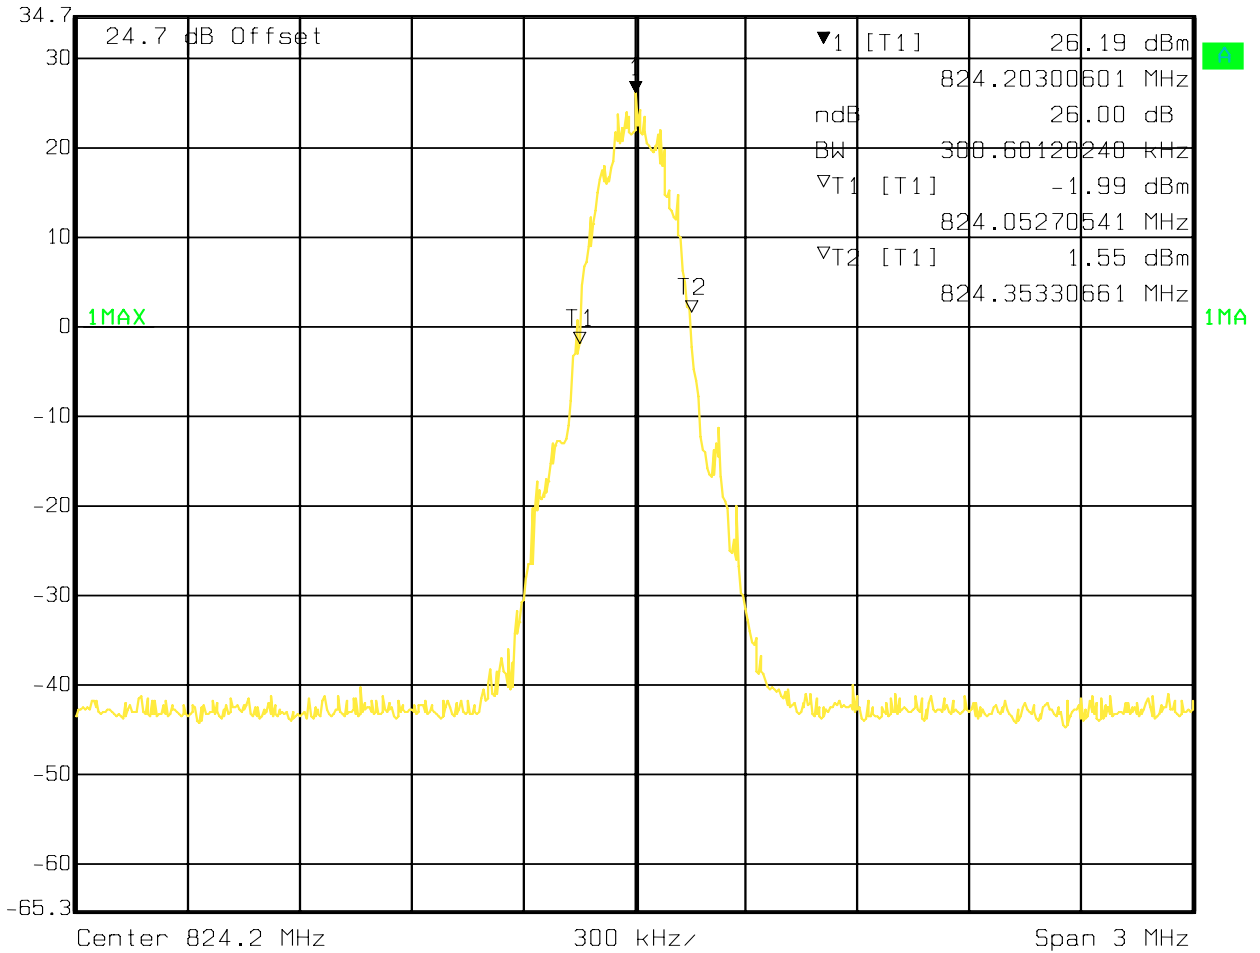

Date: 11.MAY 2009 10:02:16

**Emission band Width GSM850 MHz Channel 190 GSM**

◆ RS      Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    40 dB  
 Ref Lvl      ndB            26.00 dB      VBW    3 MHz  
 34.7 dBm      BW    306.61322645 kHz      SWT    840 ms    Unit            dBm

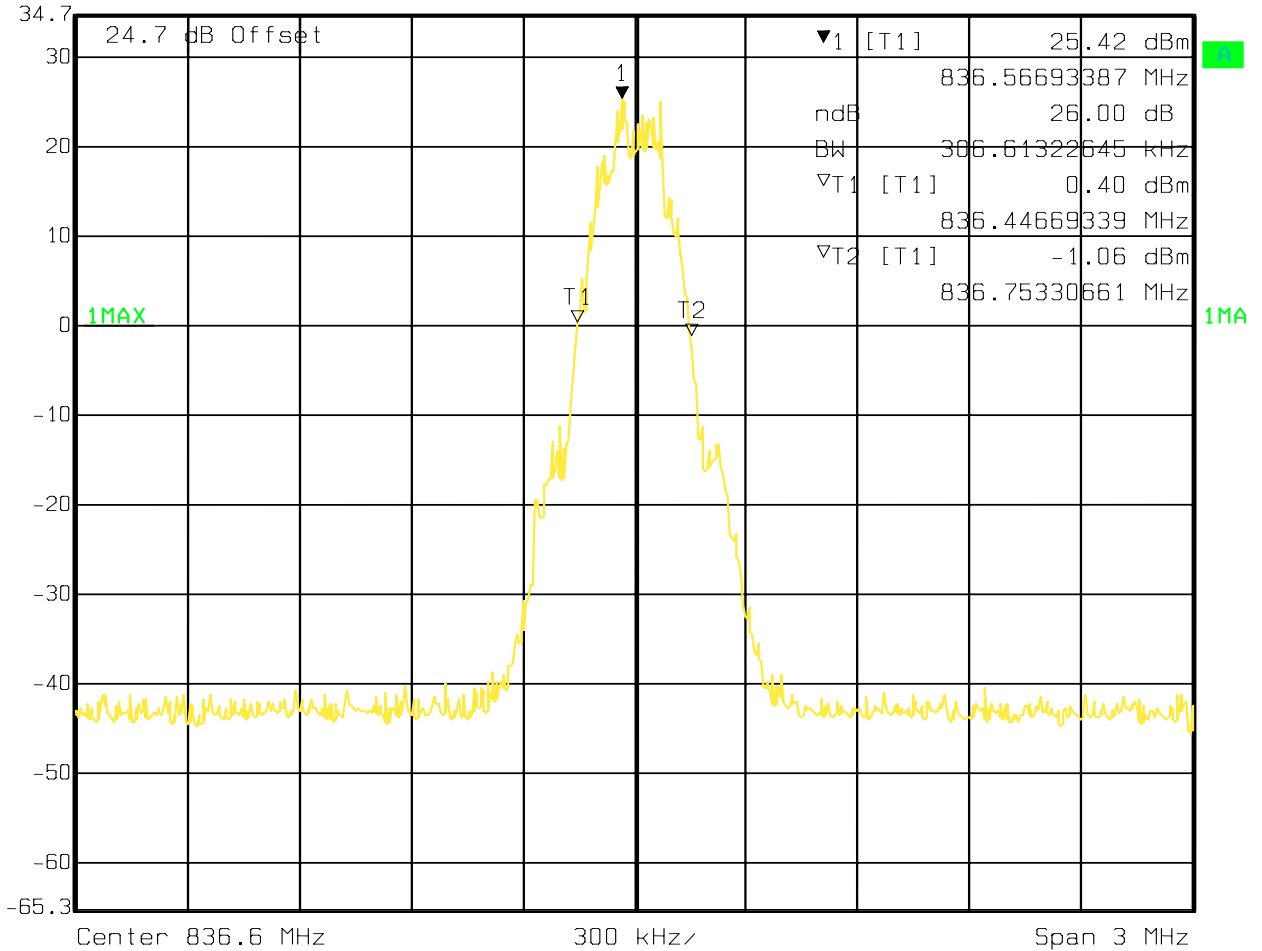


Date: 11.MAY 2009 10:01:26

**Emission band Width GSM850 MHz Channel 251 GSM**



Marker 1 [T1 ndB] RBW 3 kHz RF Att 40 dB  
 Ref Lvl ndB 26.00 dB VBW 3 MHz  
 34.7 dBm BW 312.62525050 kHz SWT 840 ms Unit dBm

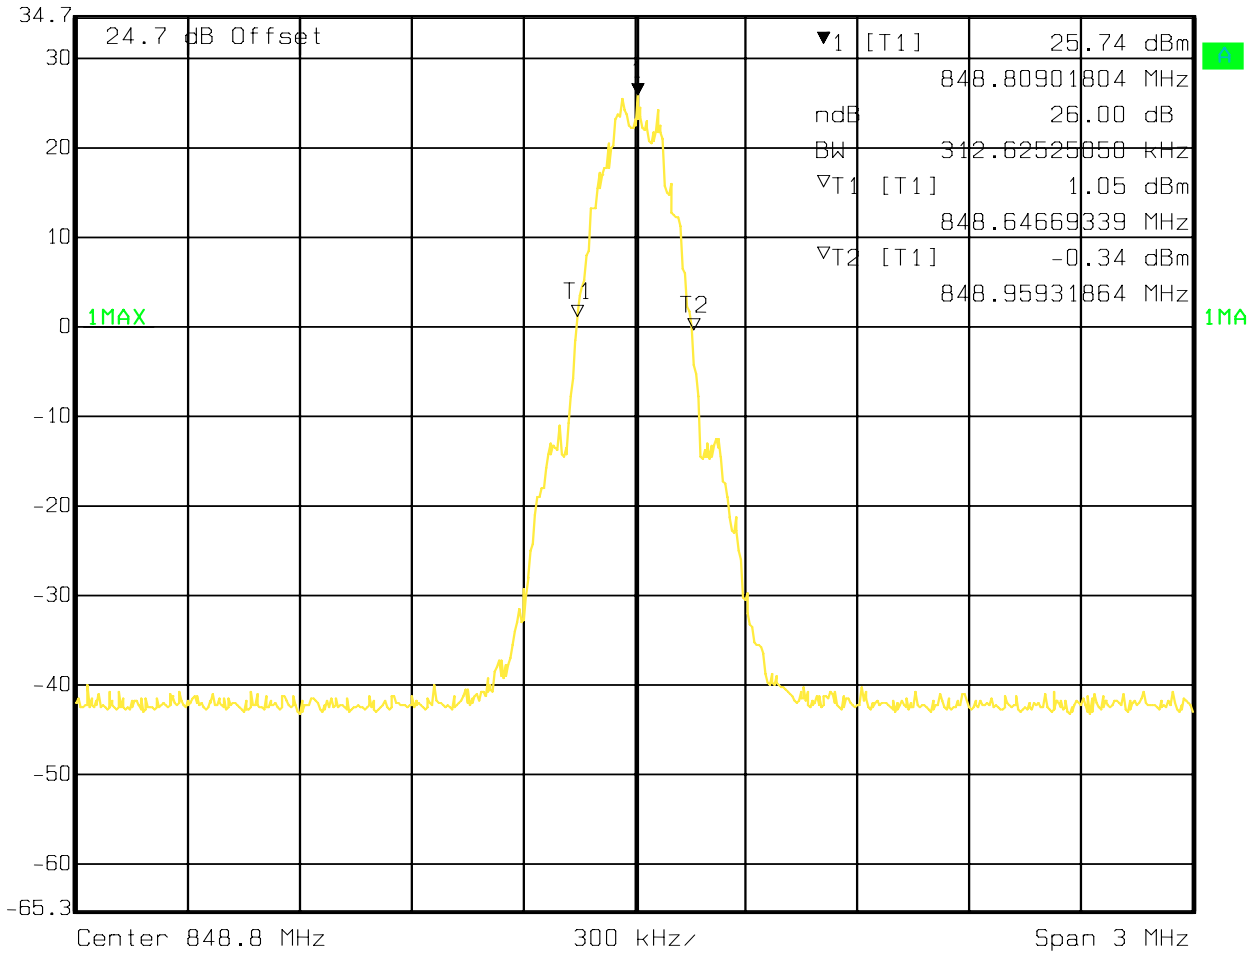


Date: 11.MAY 2009 10:00:38




**Emission band Width GSM850 MHz Channel 128 EGPRS**



Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    40 dB  
 Ref Lvl    ndB            26.00 dB      VBW    3 MHz  
 34.7 dBm    BW    318.63727455 kHz    SWT    840 ms    Unit            dBm

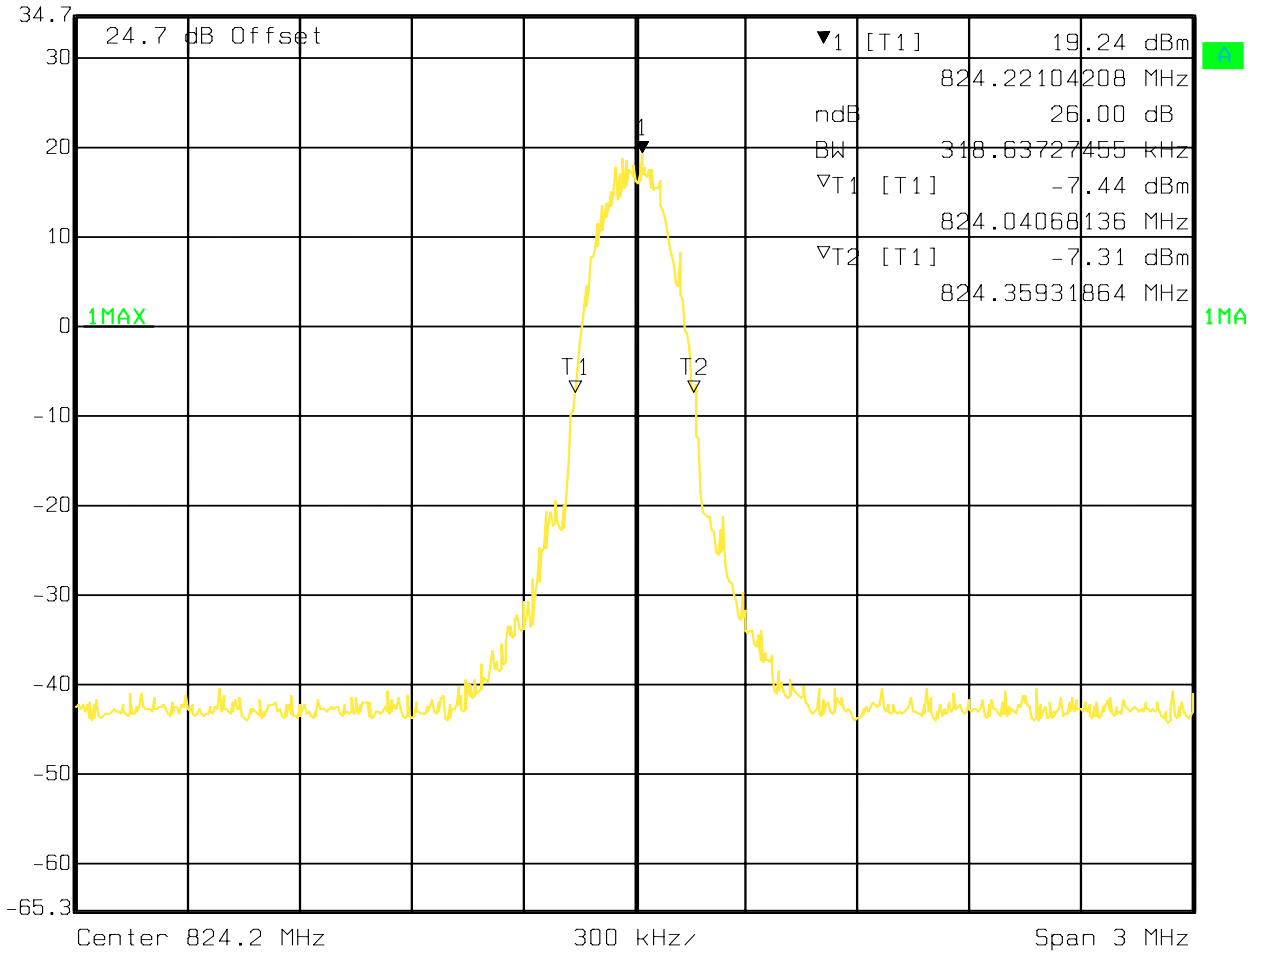

Date: 11.MAY 2009 10:03:23

**Emission band Width GSM850 MHz Channel 190 EGPRS**



Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    40 dB  
 Ref Lvl    34.7 dBm    ndB            26.00 dB    VBW    3 MHz  
BW    312.62525050 kHz    SWT    840 ms    Unit            dBm

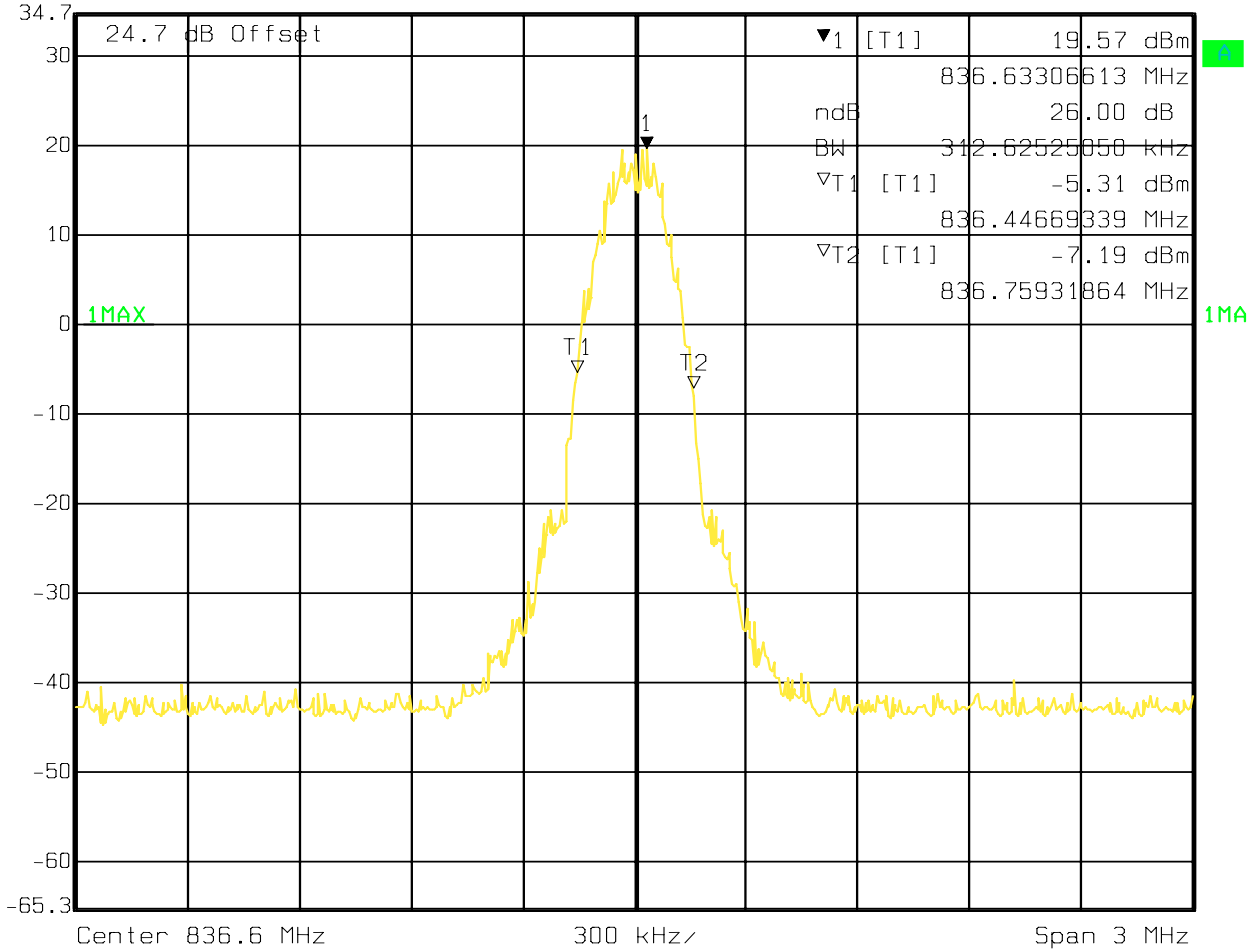

Date: 11.MAY 2009 10:04:17

**Emission band Width GSM850 MHz Channel 251 EGPRS**



Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    40 dB  
 Ref Lvl    ndB            26.00 dB      VBW    3 MHz  
 34.7 dBm    BW    306.61322645 kHz      SWT    840 ms    Unit            dBm

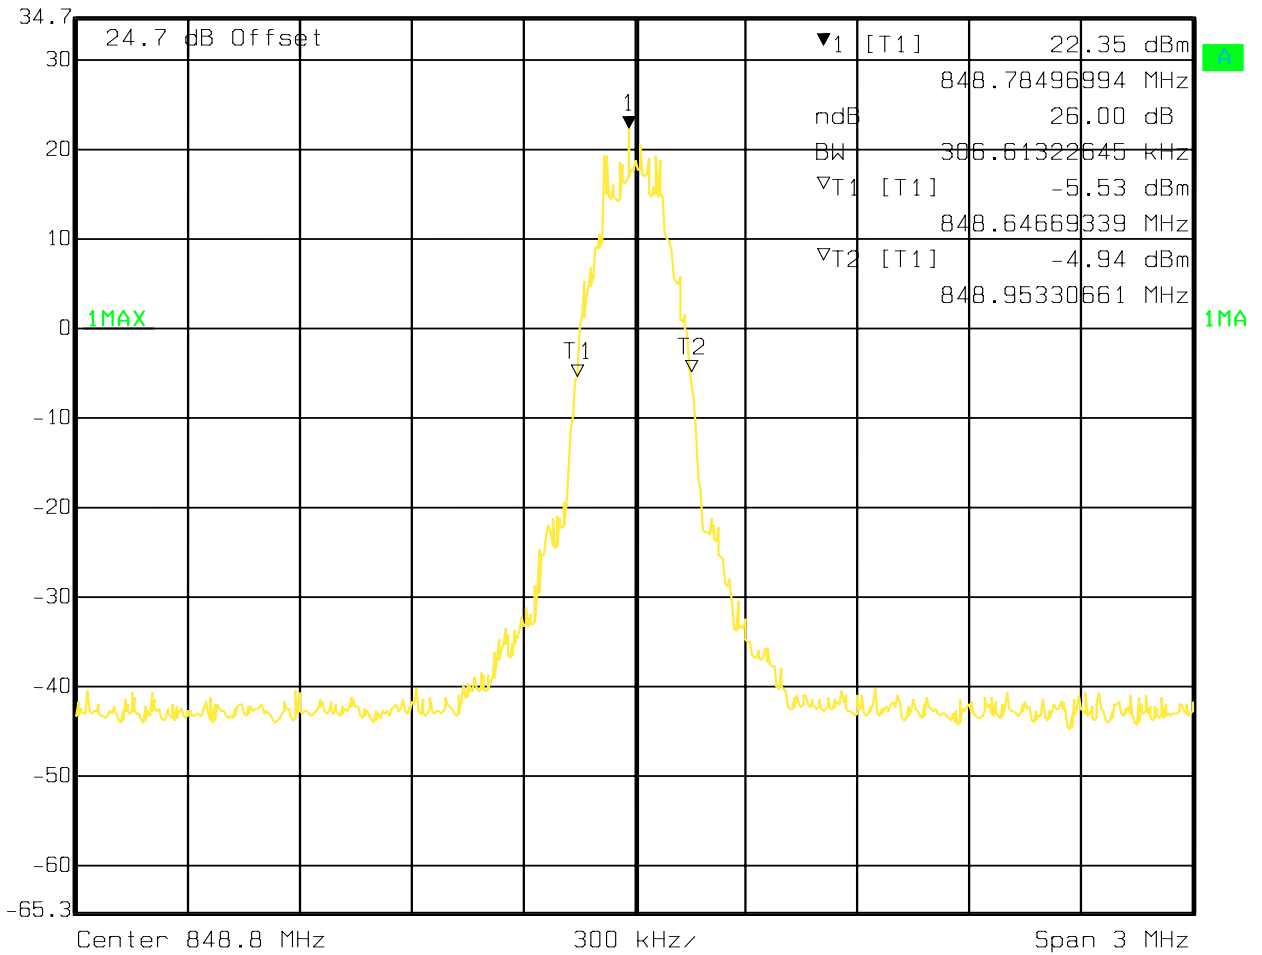

Date: 11.MAY 2009 10:05:13

**Emission band Width UMTS FDD5 Channel 4132**


	Ref Lvl	44.7 dBm	Marker 1 [T1 ndB]	ndB	26.00 dB	RBW	50 kHz	RF Att	50 dB
			BW	4.68937876 MHz			VBW	50 kHz	
						SWT	10 ms	Unit	dBm

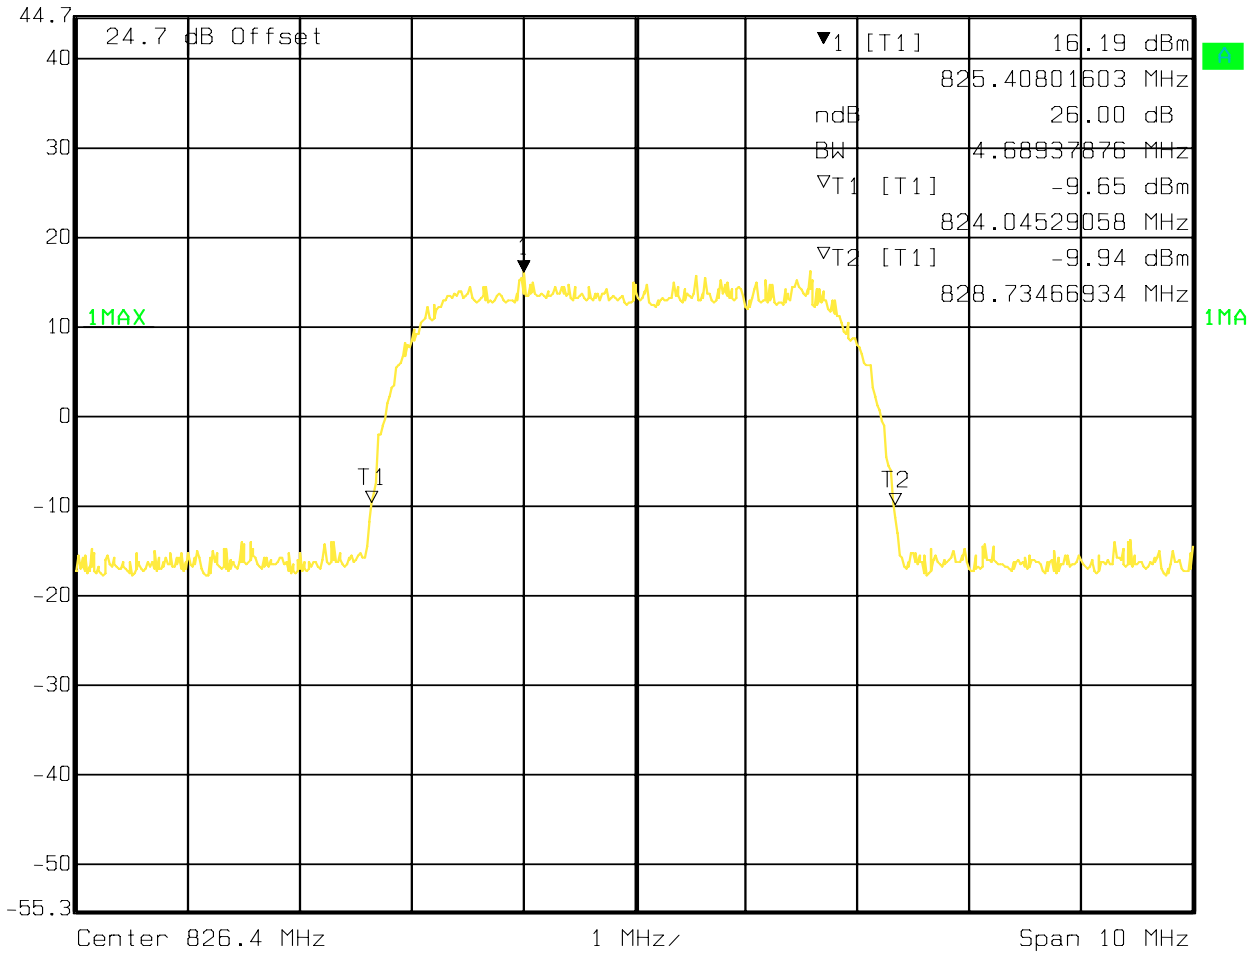

Date: 11.MAY 2009 12:34:44

**Emission band Width UMTS FDD5 Channel 4183**


 Marker 1 [T1 ndB] RBW 50 kHz RF Att 50 dB  
 Ref Lvl ndB 26.00 dB VBW 50 kHz  
 44.7 dBm BW 4.70941884 MHz SWT 10 ms Unit dBm

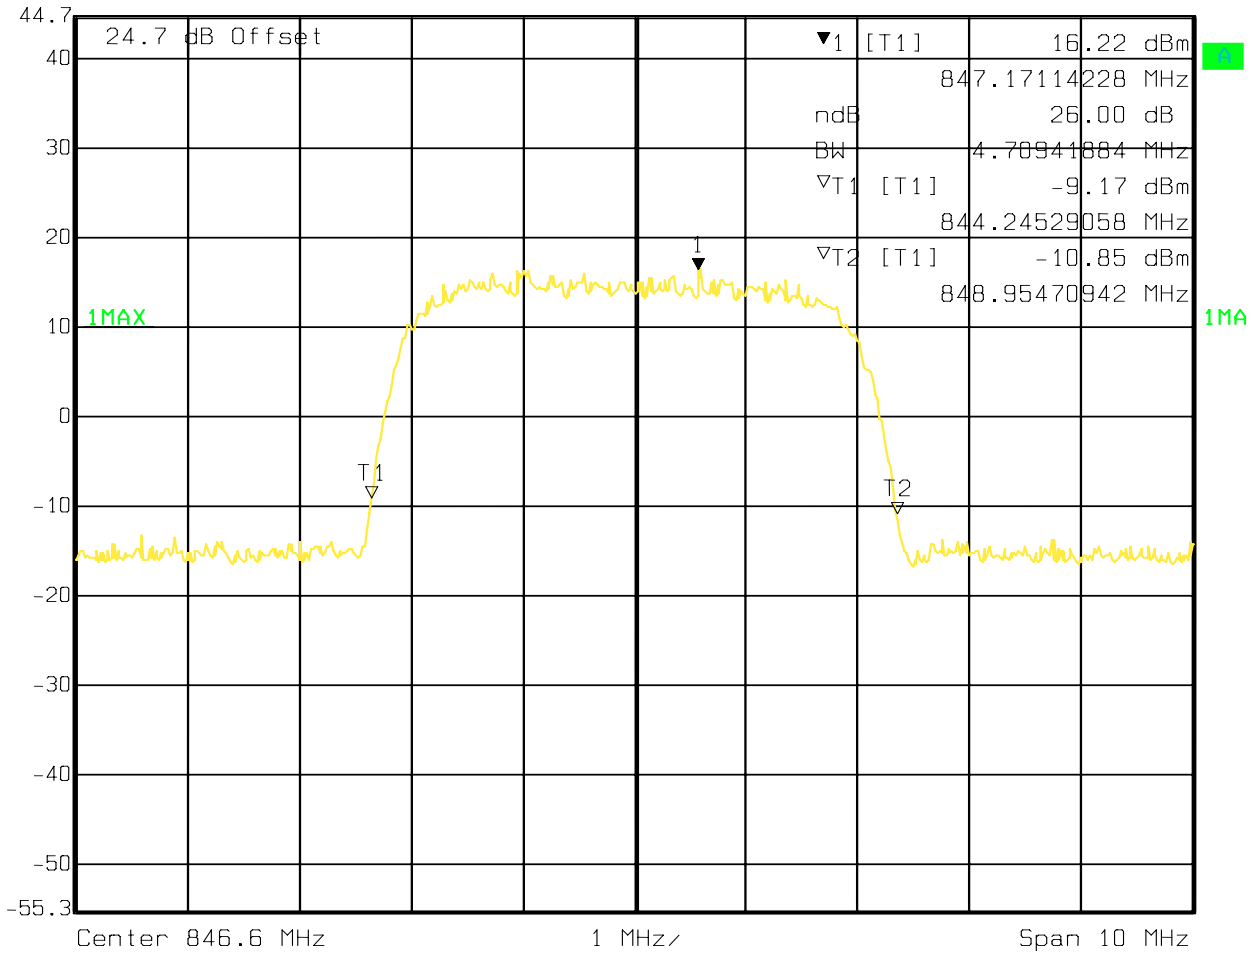


Date: 11.MAY 2009 12:33:17

**Emission band Width UMTS FDD5 Channel 4233**



Marker 1 [T1 ndB] RBW 50 kHz RF Att 50 dB  
 Ref Lvl ndB 26.00 dB VBW 50 kHz  
 44.7 dBm BW 4.70941884 MHz SWT 10 ms Unit dBm

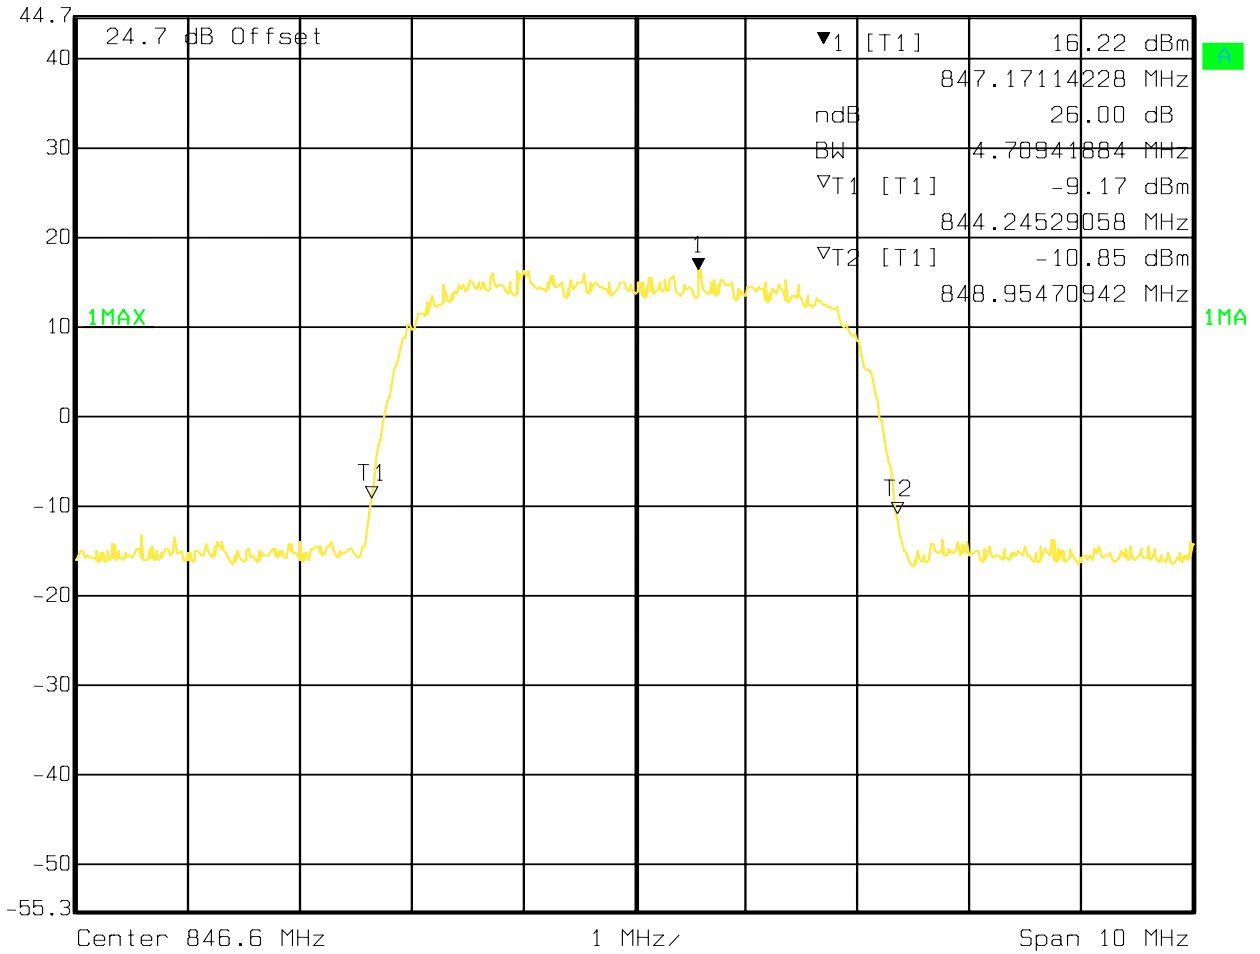


Date: 11.MAY 2009 12:33:17

**Emission band Width PCS1900 MHz Channel 512 GSM**




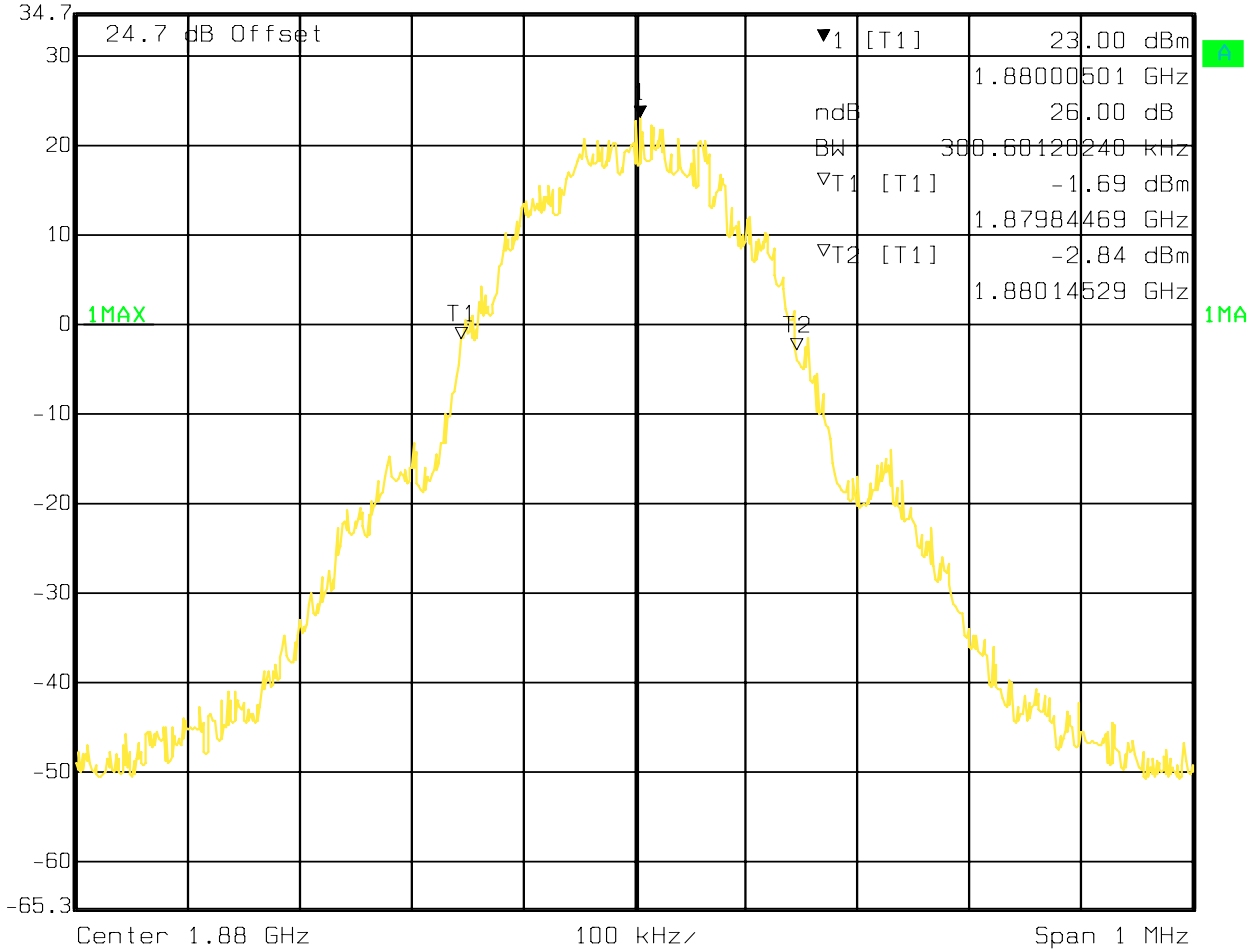
Marker 1 [T1 ndB] RBW 3 kHz RF Att 30 dB  
 Ref Lvl ndB 26.00 dB VBW 3 kHz  
 34.7 dBm BW 298.59719439 kHz SWT 280 ms Unit dBm

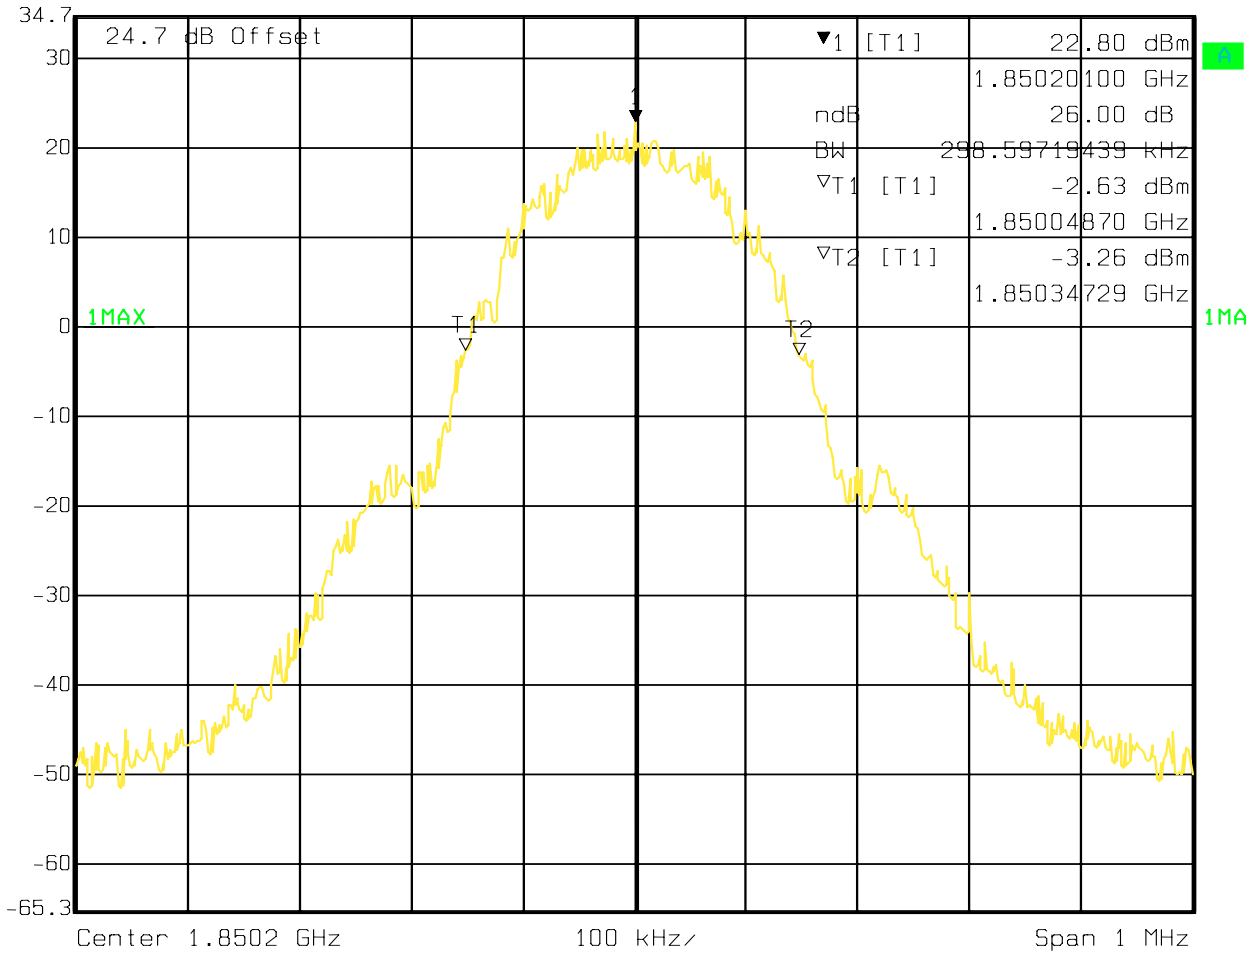

Date: 11.MAY 2009 10:55:48

**Emission band Width PCS1900 MHz Channel 661 GSM**


Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    30 dB  
 Ref Lvl    ndB            26.00 dB      VBW    3 kHz  
 34.7 dBm    BW    300.60120240 kHz      SWT    280 ms    Unit            dBm




Date: 11.MAY 2009 10:54:41



**Emission band Width PCS1900 MHz Channel 810 GSM**




Marker 1 [T1 ndB] RBW 3 kHz RF Att 30 dB  
 Ref Lvl ndB 26.00 dB VBW 3 kHz  
 34.7 dBm BW 312.62525050 kHz SWT 280 ms Unit dBm

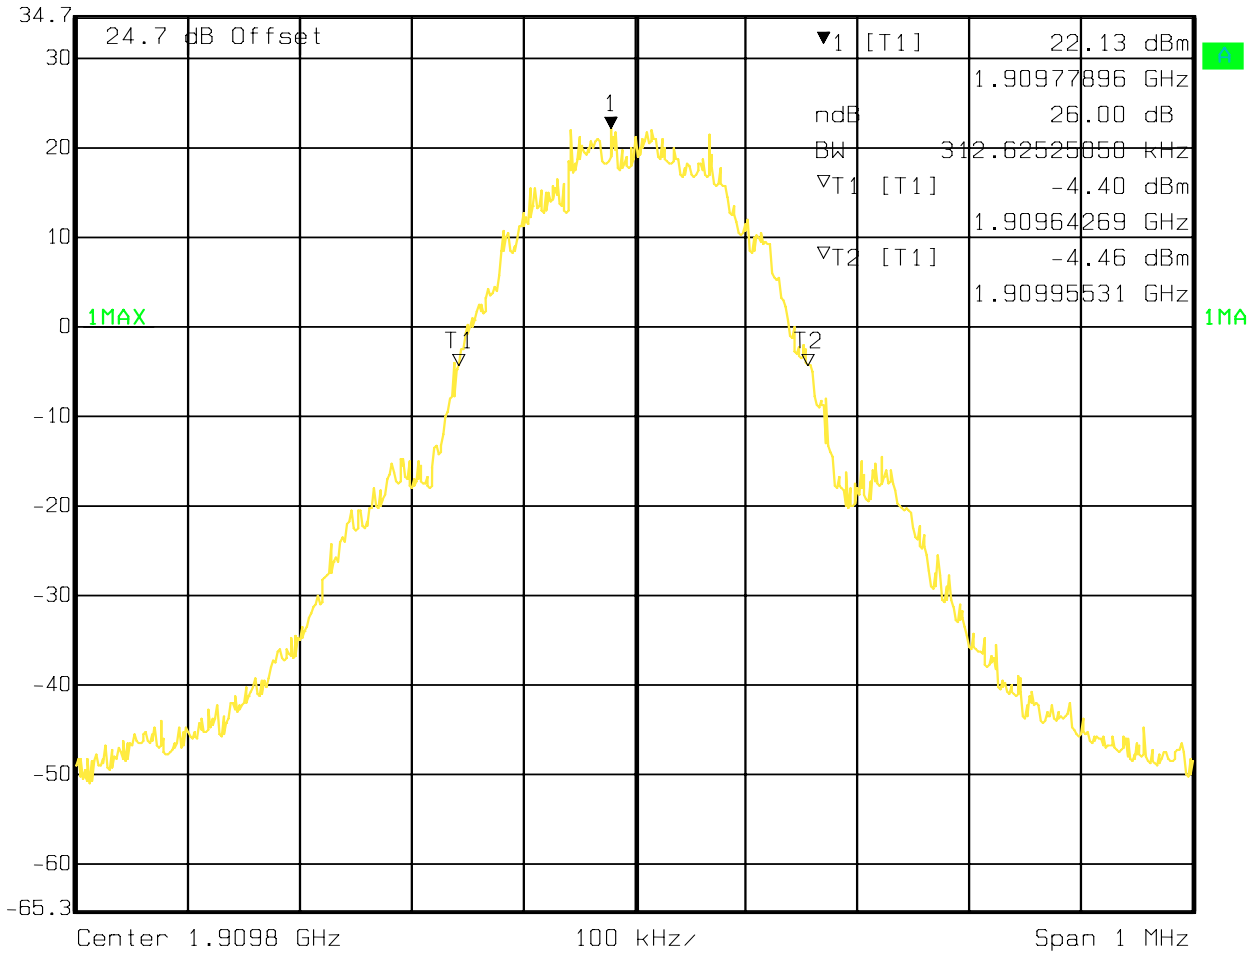

Date: 11.MAY 2009 10:53:32

**Emission band Width PCS1900 MHz Channel 512 EGPRS**



Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    30 dB  
 Ref Lvl    ndB            26.00 dB      VBW    3 kHz  
 34.7 dBm    BW    304.60921844 kHz      SWT    280 ms    Unit            dBm

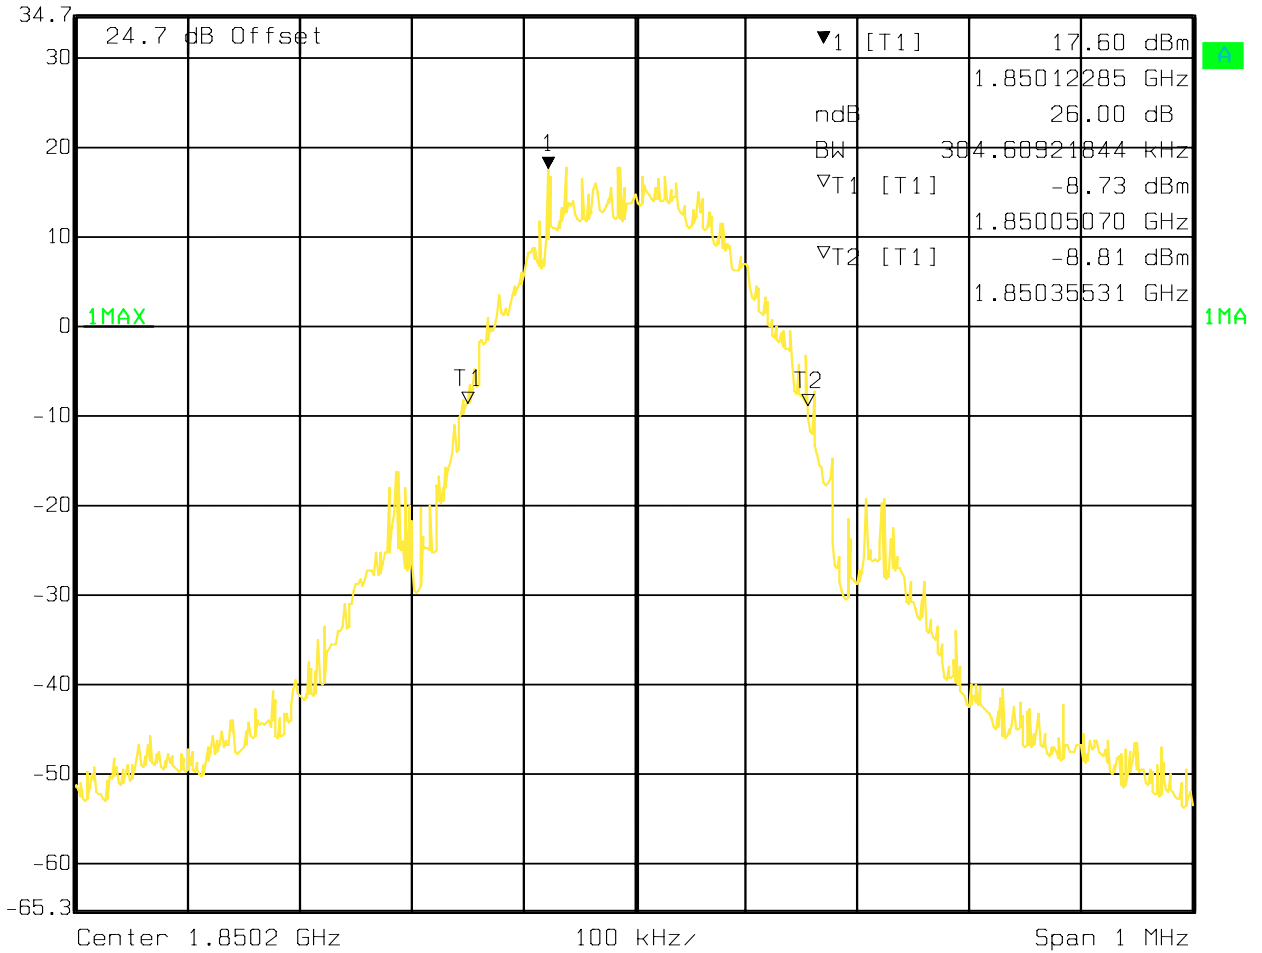

Date: 11.MAY 2009 10:56:55

**Emission band Width PCS1900 MHz Channel 661 EGPRS**


Ref Lvl 34.7 dBm
Marker 1 [T1 ndB] 26.00 dB
RBW 3 kHz
RF Att 30 dB  
BW 296.59318637 kHz
VBW 3 kHz
SWT 280 ms
Unit dBm

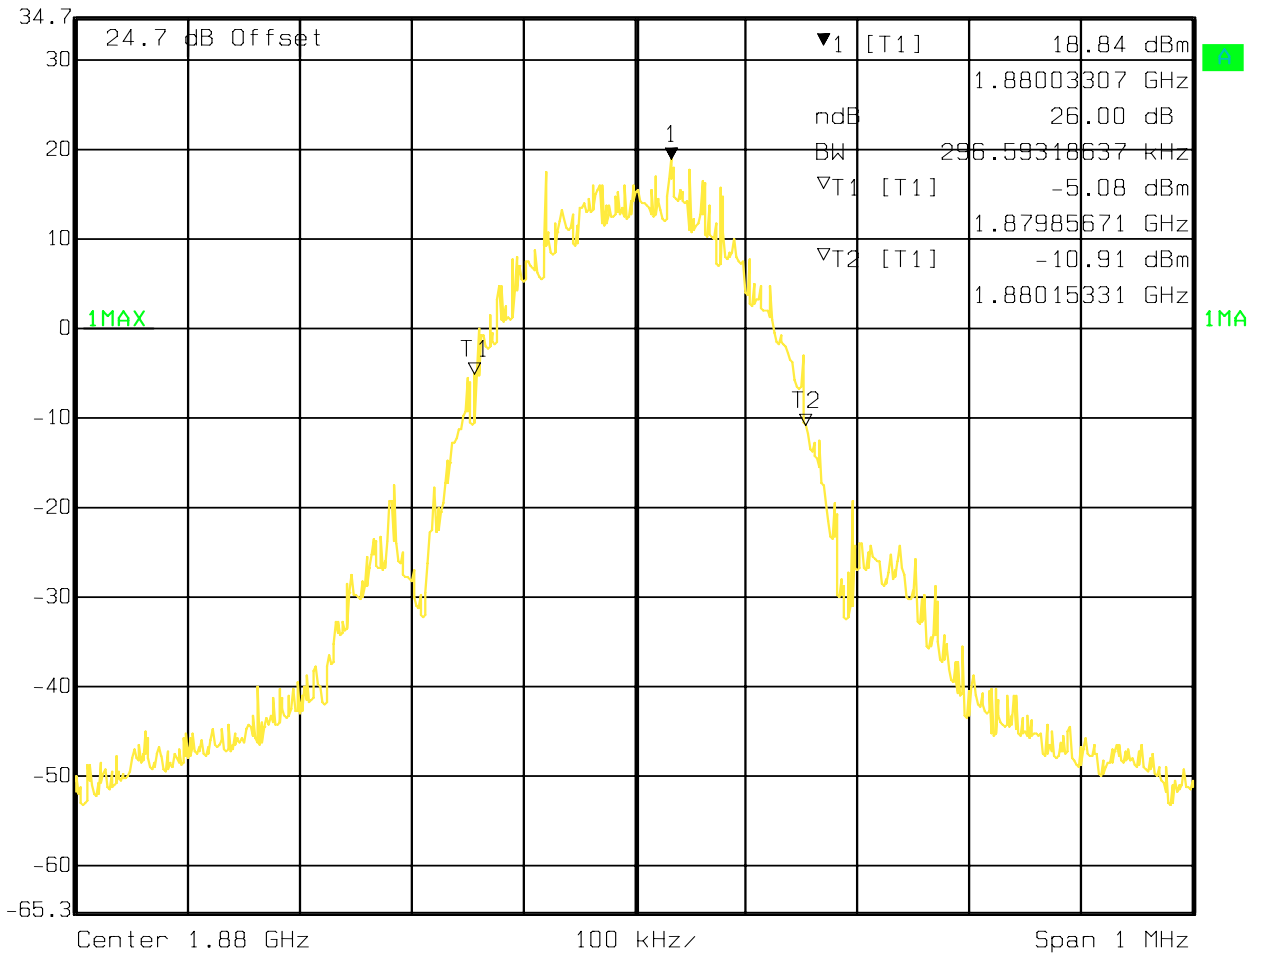

Date: 11.MAY 2009 10:57:52

**Emission band Width PCS1900 MHz Channel 810 EGPRS**


Marker 1 [T1 ndB] RBW 3 kHz RF Att 30 dB  
 Ref Lvl ndB 26.00 dB VBW 3 kHz  
 34.7 dBm BW 302.60521042 kHz SWT 280 ms Unit dBm

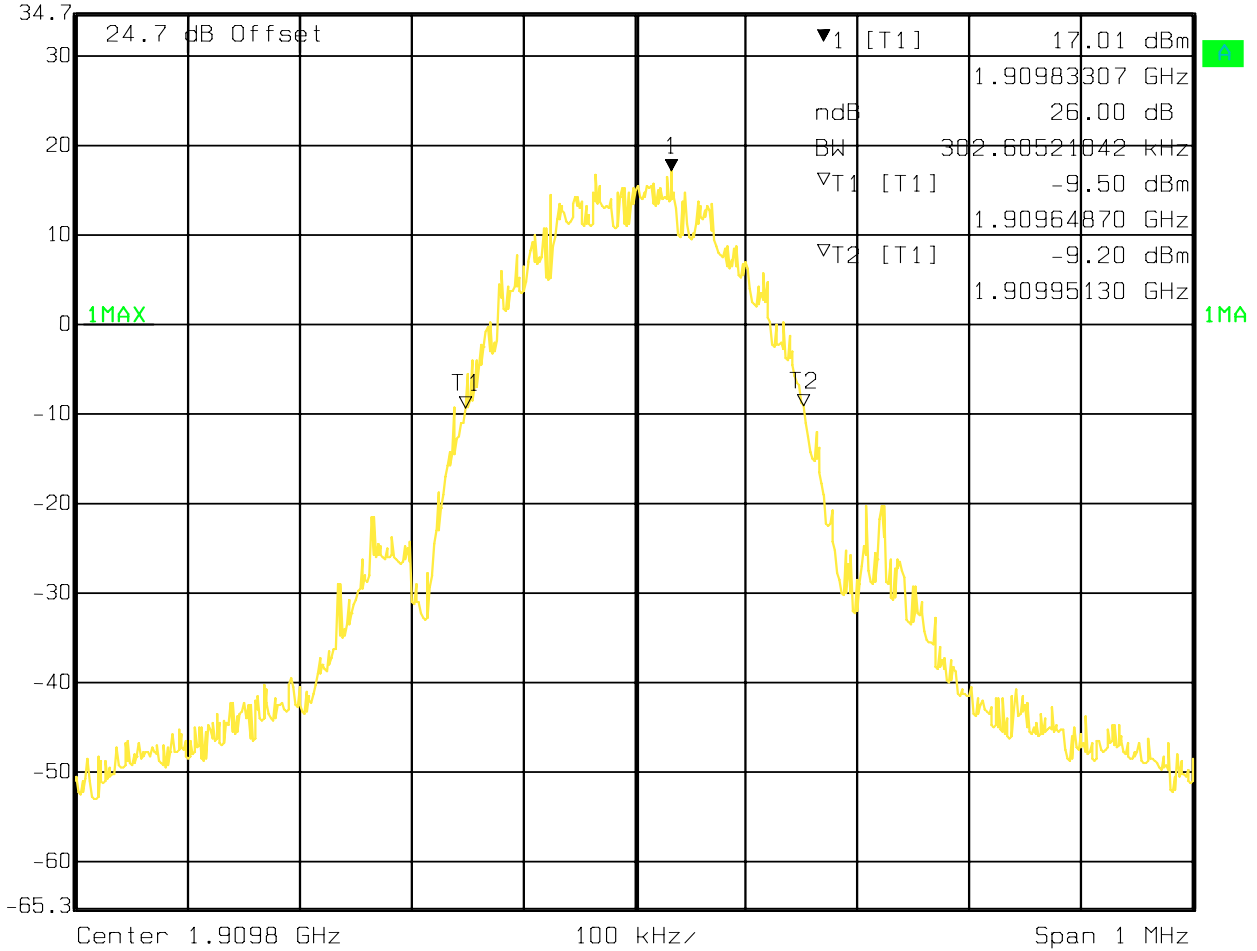

Date: 11.MAY 2009 10:58:45

**Emission band Width UMTS FDD2 Channel 9262**


	Ref Lvl	34.7 dBm	Marker 1 [T1 ndB]	ndB	26.00 dB	RBW	50 kHz	RF Att	30 dB
			BW	4.62925852 MHz		VBW	50 kHz	Unit	dBm
						SWT	10 ms		

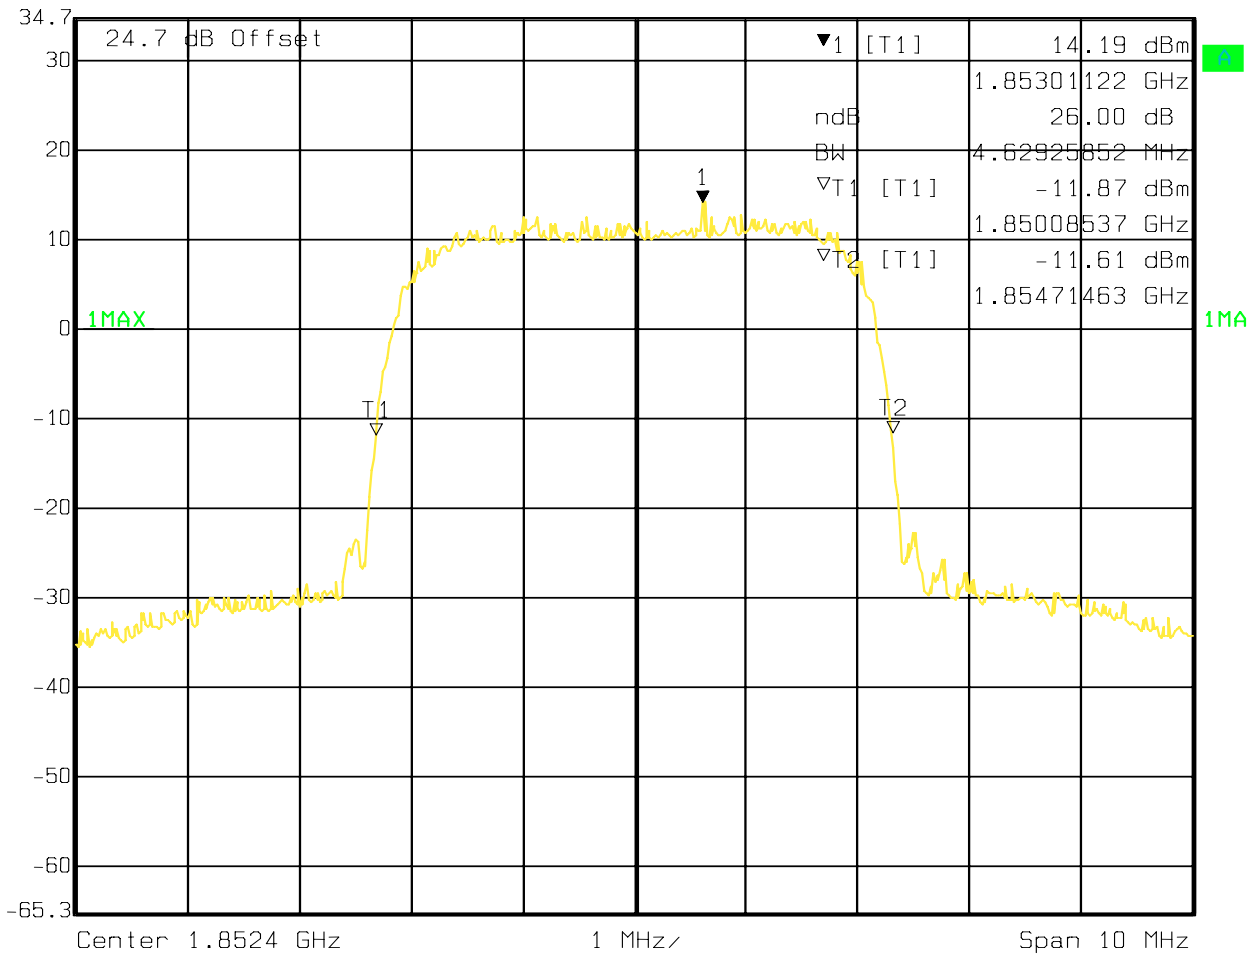

Date: 11.MAY 2009 11:46:50

**Emission band Width UMTS FDD2 Channel 9400**


 Marker 1 [T1 ndB] RBW 50 kHz RF Att 30 dB  
 Ref Lvl ndB 26.00 dB VBW 50 kHz  
 34.7 dBm BW 4.66933868 MHz SWT 10 ms Unit dBm

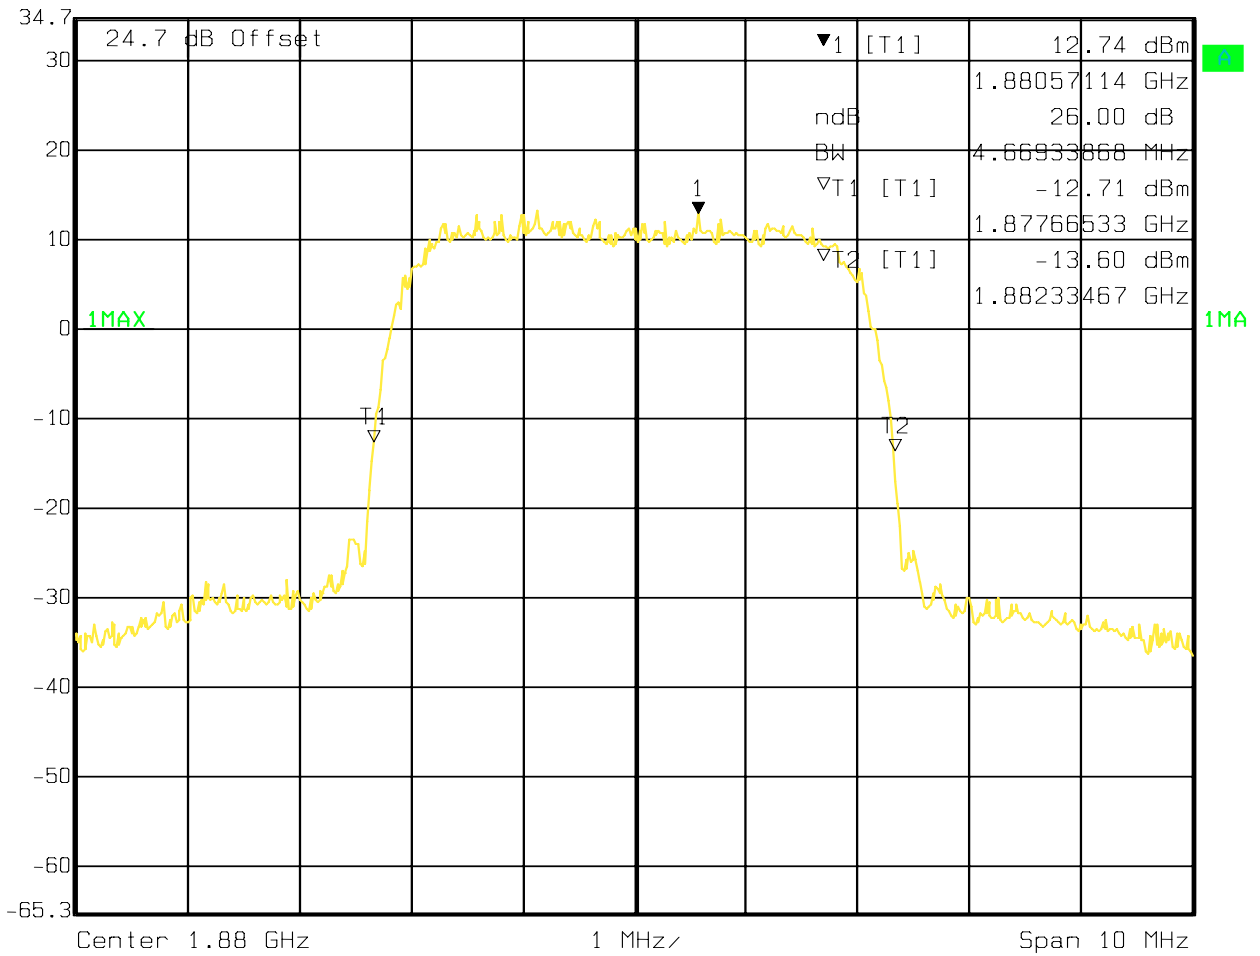


Date: 11.MAY 2009 11:47:39

**Emission band Width UMTS FDD2 Channel 9538**



Marker 1 [T1 ndB] RBW 50 kHz RF Att 30 dB  
 Ref Lvl ndB 26.00 dB VBW 50 kHz  
 34.7 dBm BW 4.66933868 MHz SWT 10 ms Unit dBm

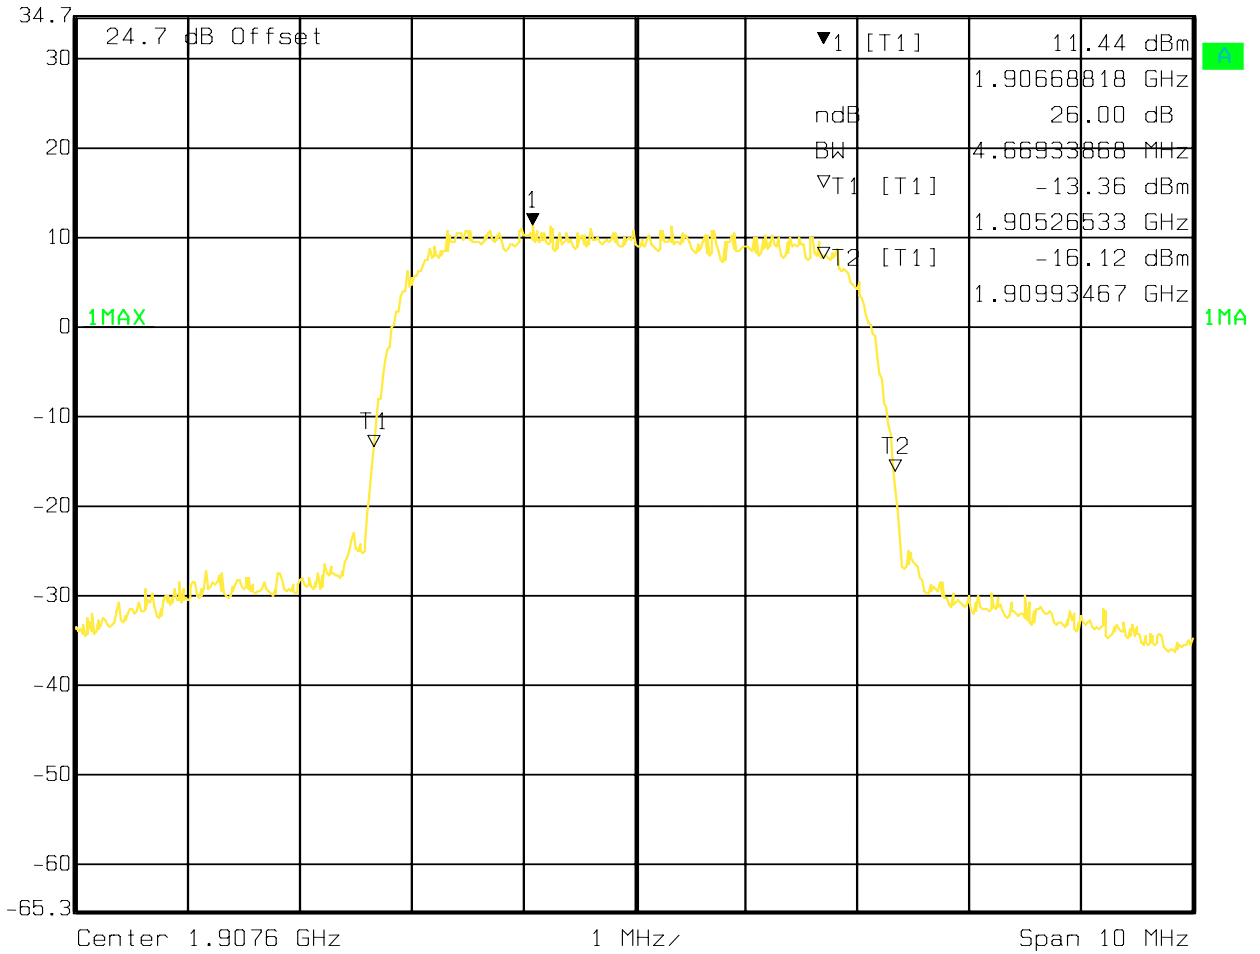

Date: 11.MAY 2009 11:48:30

### 5.3 Frequency Stability

#### 5.3.1 Limit

**For Hand carried battery powered equipment:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.2VDC and 4.5VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -2.7% and +21.62%. For the purposes of measuring frequency stability these voltage limits are to be used.

**Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU 200 UNIVERSAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30 C.
3. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS-1900&9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours un-powered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50 C.
7. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS-1900&9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

**For equipment powered by primary supply voltage:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

For this EUT section 2.1055(d)(1) applies. This requires to vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.





**5.3.2 Test Results Frequency Stability (GSM-850)**

Channel No. 190	836.6MHz	
Voltage (V)	Freq. Error (Hz)	Freq. Error (ppm)
Low vol.:	-24	-0.028687544
High vol.:	-23	-0.02749223

**§2.1055 (a)(1)**

**AFC FREQ ERROR vs. TEMPERATURE**

Channel No. 190	836.6MHz	
Temperature (°C)	Freq. Error (Hz)	Freq. Error (ppm)
-30	27	-0.032273487
-20	28	0.033468802
-10	28	0.033468802
0	33	0.039445374
+10	-27	0.032273487
+20	-23	-0.02749223
+30	-25	-0.029882859
+35	21	0.025101601
+50	-19	0.022710972

**§2.1055 (b)(2)**

**Battery end point**

Channel No. 190	836.6MHz	
Battery End-Point (Vdc) (Note1)	Freq. Error (Hz)	Freq. Error (ppm)
2.9 V	-70	-0.037234042



**5.3.3 Test Results Frequency Stability (GSM-1900)**

Channel No. 661	1880MHz	
Voltage (V)	Freq. Error (Hz)	Freq. Error (ppm)
Low vol.:	44	0.023404255
High vol.:	47	0.025

**§2.1055 (a)(1)**

**AFC FREQ ERROR vs. TEMPERATURE**

Channel No. 661	1880MHz	
Temperature (°C)	Freq. Error (Hz)	Freq. Error (ppm)
-30	50	0.026595744
-20	70	0.037234042
-10	68	0.036170212
0	56	0.029787234
+10	44	0.023404255
+20	47	0.025
+30	59	0.031382978
+35	34	0.018085106
+50	36	0.019148936

**§2.1055 (b)(2)**

**Battery end point**

Channel No. 661	1880MHz	
Battery End-Point (Vdc) (Note1)	Freq. Error (Hz)	Freq. Error (ppm)
2.8	-83	-0.044148936



**5.3.4 Test Results Frequency Stability (UMTS FDD5)**

Channel No. 4183	836.6Hz	
Voltage (V)	Freq. Error (Hz)	Freq. Error (ppm)
Low vol.:	13	0.015539086
High vol.:	12	0.0251

**§2.1055 (a)(1)**

**AFC FREQ ERROR vs. TEMPERATURE**

Channel No. 4183	836.6Hz	
Temperature (°C)	Freq. Error (Hz)	Freq. Error (ppm)
-30	13	0.015539086
-20	11	0.013148458
-10	12	0.0251
0	11	0.013148458
+10	14	0.016734401
+20	12	0.0251
+30	14	0.016734401
+35	11	0.013148458
+50	13	0.015539086

**§2.1055 (b)(2)**

**Battery end point**

Channel No. 4183	836.6Hz	
Battery End-Point (Vdc) (Note1)	Freq. Error (Hz)	Freq. Error (ppm)
2.8	28	0.033468802



**5.3.5 Test Results Frequency Stability (UMTS FDD2)**

Channel No. 9400	1880MHz	
Voltage (V)	Freq. Error (Hz)	Freq. Error (ppm)
<b>Low vol.:</b>	-30	-0.015957446
<b>High vol.:</b>	-22	-0.011702127

**§2.1055 (a)(1)**

**AFC FREQ ERROR vs. TEMPERATURE**

Channel No. 9400	1880MHz	
Temperature (°C)	Freq. Error (Hz)	Freq. Error (ppm)
-30	-25	-0.013297872
-20	-9	-0.004787234043
-10	-26	-0.013829787
0	-27	-0.014361702
+10	-28	-0.014893617
+20	-22	-0.011702127
+30	-29	-0.015425531
35	-30	-0.015957446
+50	-32	-0.0170211276

**§2.1055 (b)(2)**

**Battery end point**

Channel No. 9400	1880MHz	
Battery End-Point (Vdc) (Note1)	Freq. Error (Hz)	Freq. Error (ppm)
<b>2.8</b>	37	0.019680851

## 5.4 Spurious Emissions Conducted

### 5.4.1 FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

### 5.4.2 Limits:

#### 5.4.2.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### 5.4.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the

transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### 5.4.3 Conducted out of band emissions measurement procedure:

Based on TIA-603C 2004

##### 2.2.13 Unwanted Emissions: Conducted Spurious

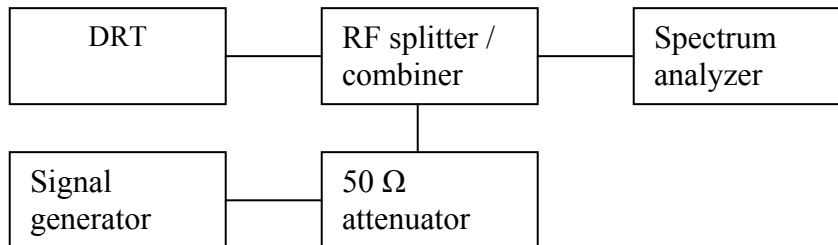

1. Connect the equipment as shown in the above diagram.
2. Set the spectrum analyzer to measure peak hold with the required settings.
3. Set the signal generator to a known output power and record the path loss in dB (**LOSS**) for frequencies up to the tenth harmonic of the EUT's carrier frequency. **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
4. Replace the signal generator with the EUT.
5. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.

(**note:** Step 3 above is performed prior to testing and **LOSS** is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)


#### 5.4.4 Test Results: Conducted Out of band Emission:

No measurable emissions noted. See plots.

All measurement conducted in GSM and UMTS mode with highest power settings. Plots here show worse case emission for each channel under any modulation.

**Lower Band Edge GSM850 GSM**



 Marker 1 [T1] RBW 3 kHz RF Att 40 dB  
 Ref Lvl -13.47 dBm VBW 3 MHz  
 34.7 dBm 823.98997996 MHz SWT 280 ms Unit dBm

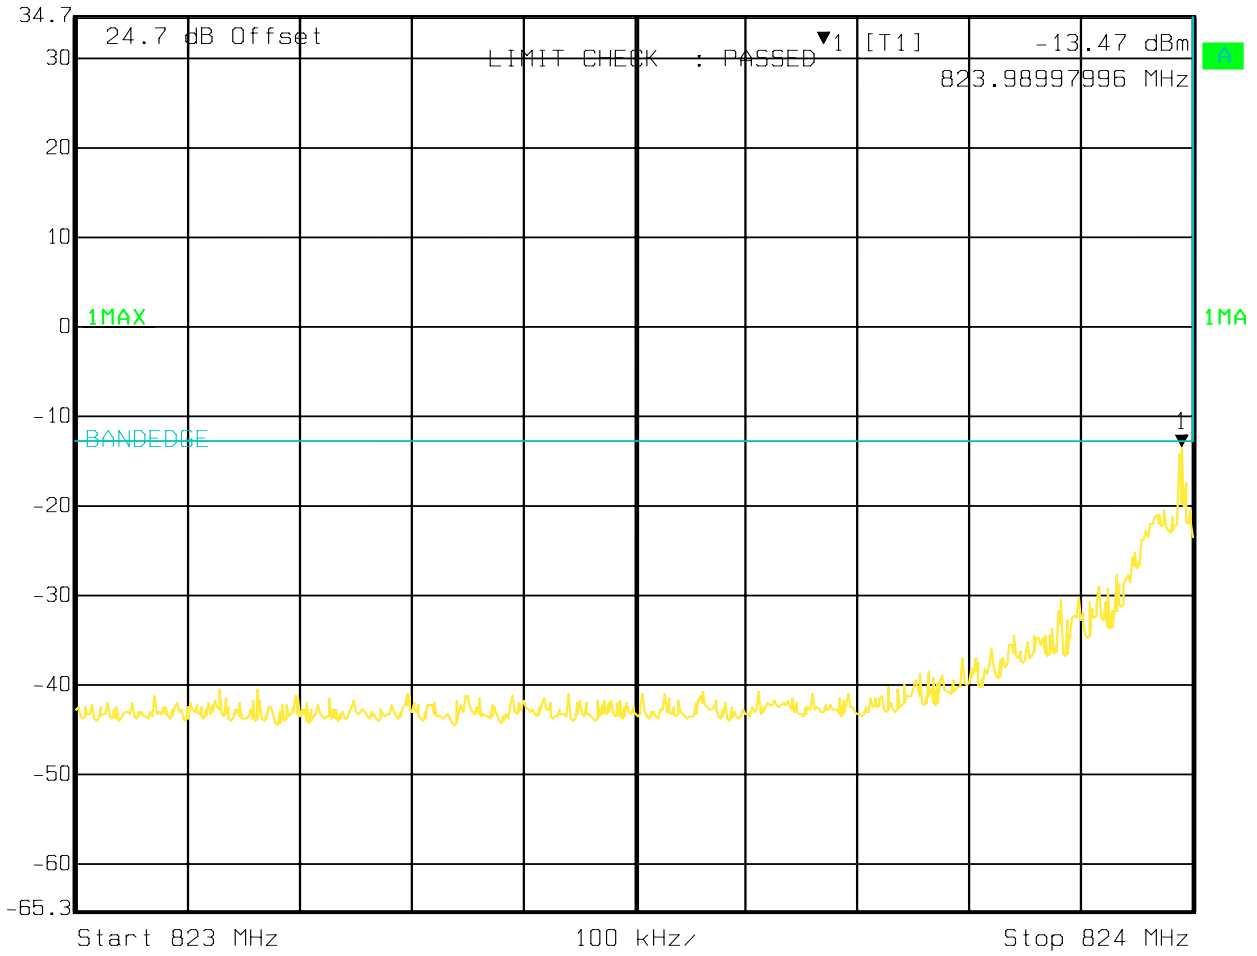

Date: 11.MAY 2009 10:19:09

### Upper Band Edge GSM850 GSM


 Marker 1 [T1] RBW 3 kHz RF Att 40 dB  
 Ref Lvl -14.79 dBm VBW 3 MHz  
 34.7 dBm 849.01002004 MHz SWT 280 ms Unit dBm

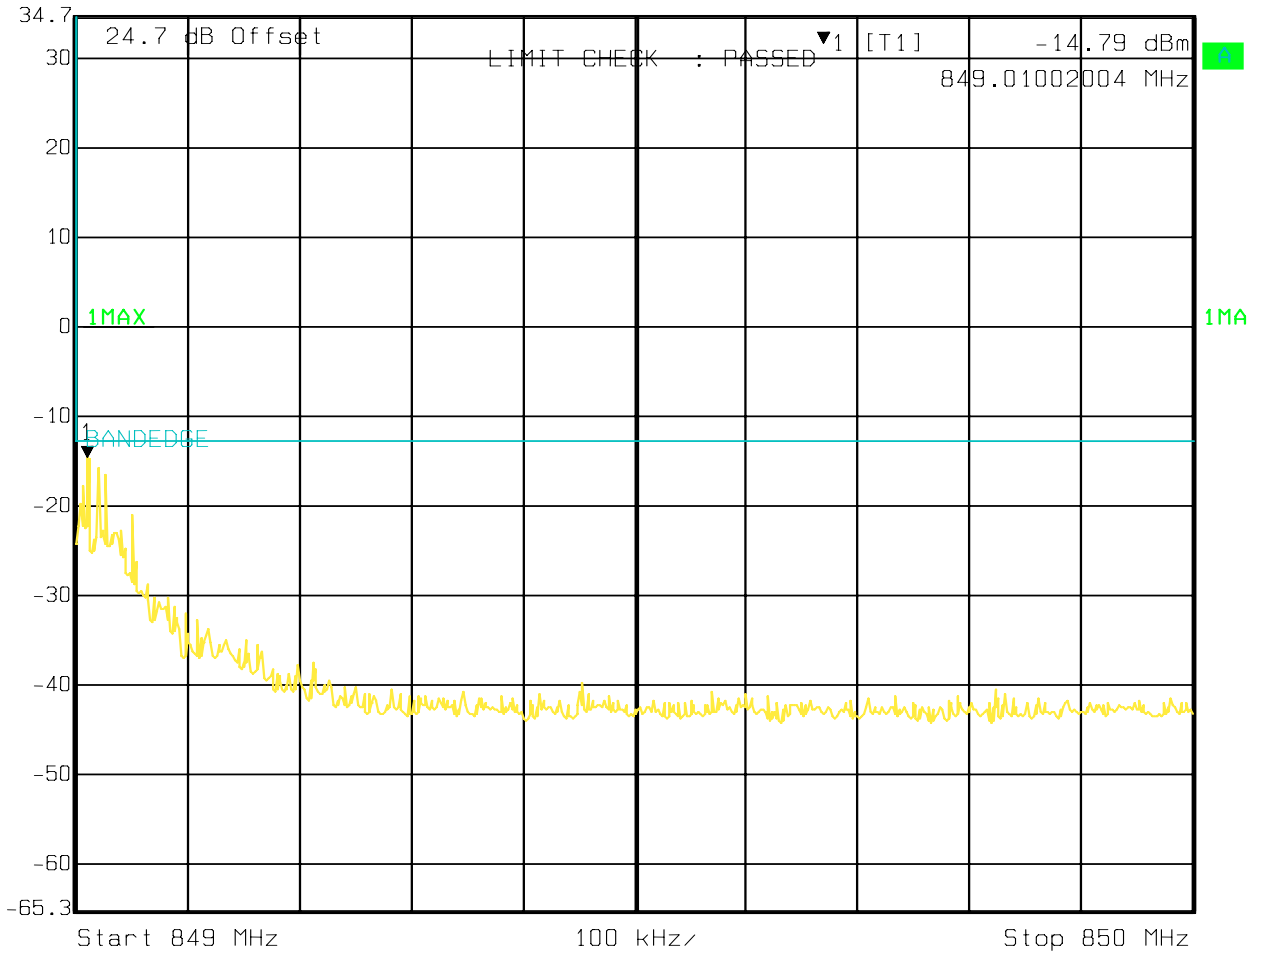


Date: 11.MAY 2009 10:20:07



### Lower Band Edge GSM850 EGPRS




Marker: 1 [T1] RBW 3 kHz RF Att 40 dB  
Ref Lvl -13.45 dBm VBW 3 MHz  
34.7 dBm 823.98797595 MHz SWT 280 ms Unit dBm

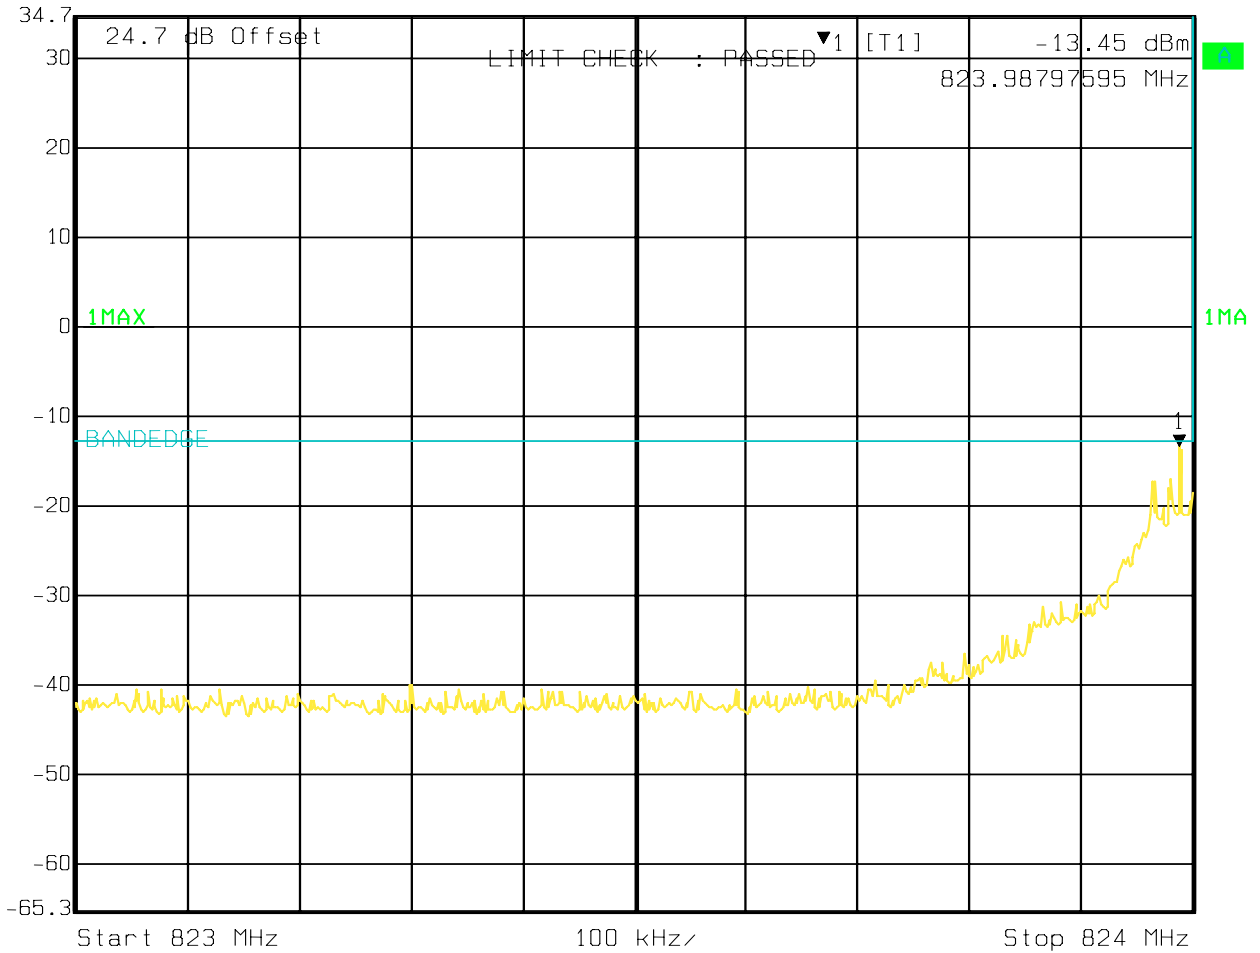

Date: 11.MAY 2009 10:16:20

### Upper Band Edge GSM850 EGPRS


Marker: 1 [T1] RBW 3 kHz RF Att 40 dB  
Ref Lvl -13.59 dBm VBW 3 MHz  
34.7 dBm 849.01202405 MHz SWT 280 ms Unit dBm

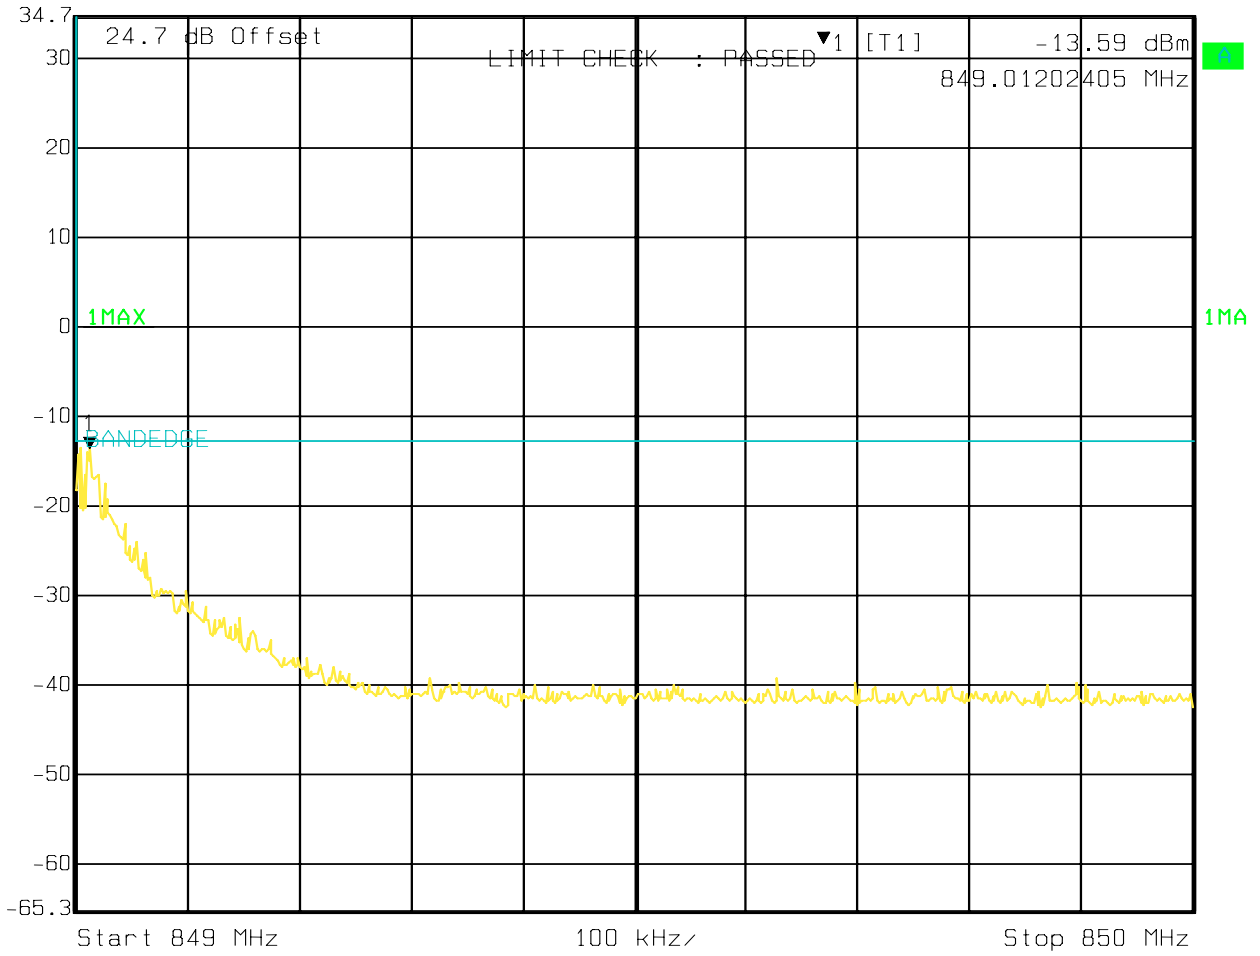

Date: 11.MAY 2009 10:14:12

**Lower Band Edge GSM1900 GSM**



 Ref Lvl 34.7 dBm  
 Marker 1 [T1] 1.84999800 GHz -15.28 dBm  
 RBW 3 kHz RF Att 30 dB  
 VBW 3 kHz  
 SWT 280 ms Unit dBm

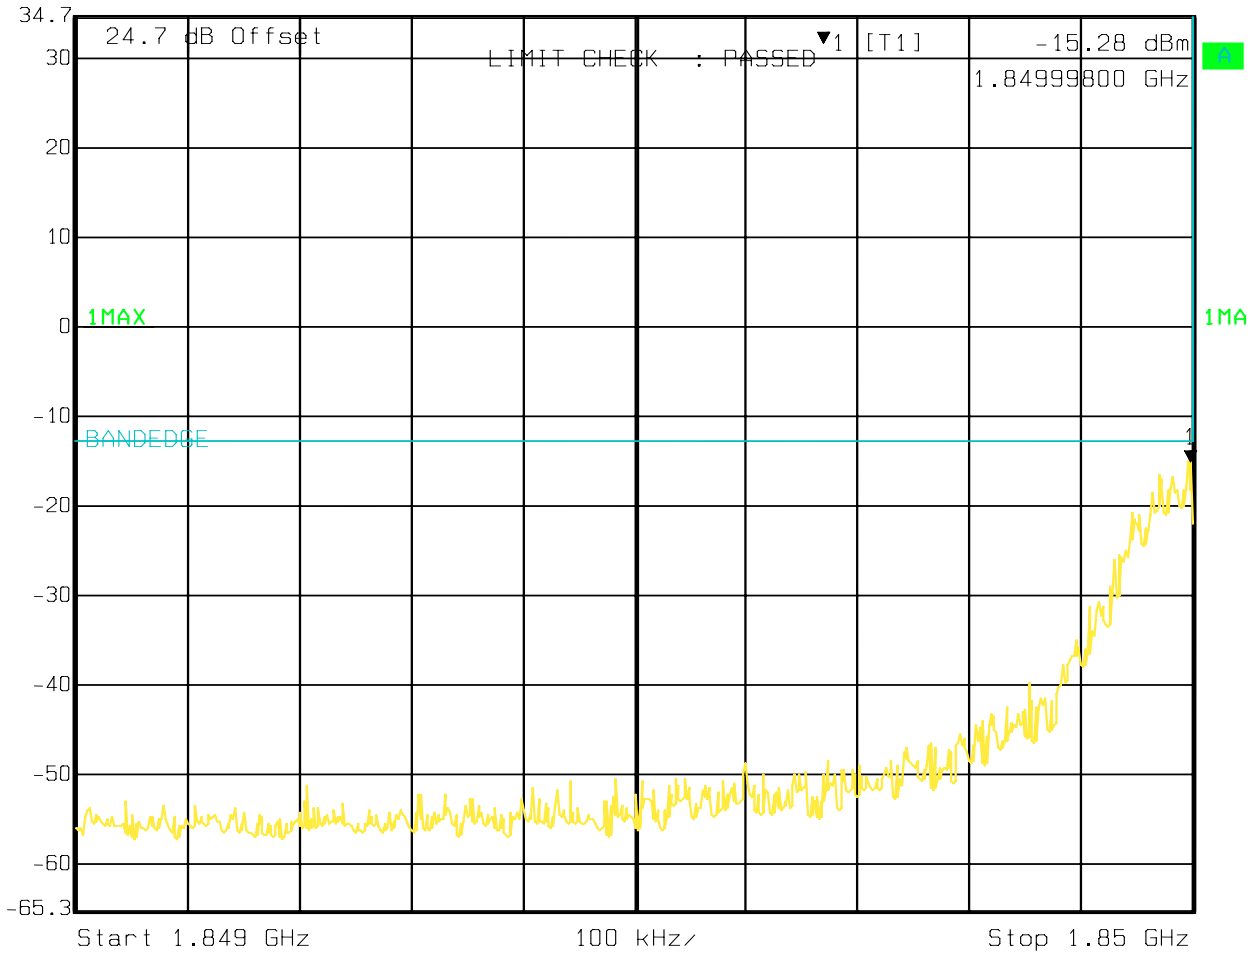

Date: 11.MAY 2009 10:37:55

### Upper Band Edge GSM1900 GSM

 Ref Lvl 34.7 dBm      Marker 1 [T1] 1.91000601 GHz      RBW 3 kHz      RF Att 30 dB  
-16.18 dBm      VBW 3 kHz      Unit dBm  
SWT 280 ms

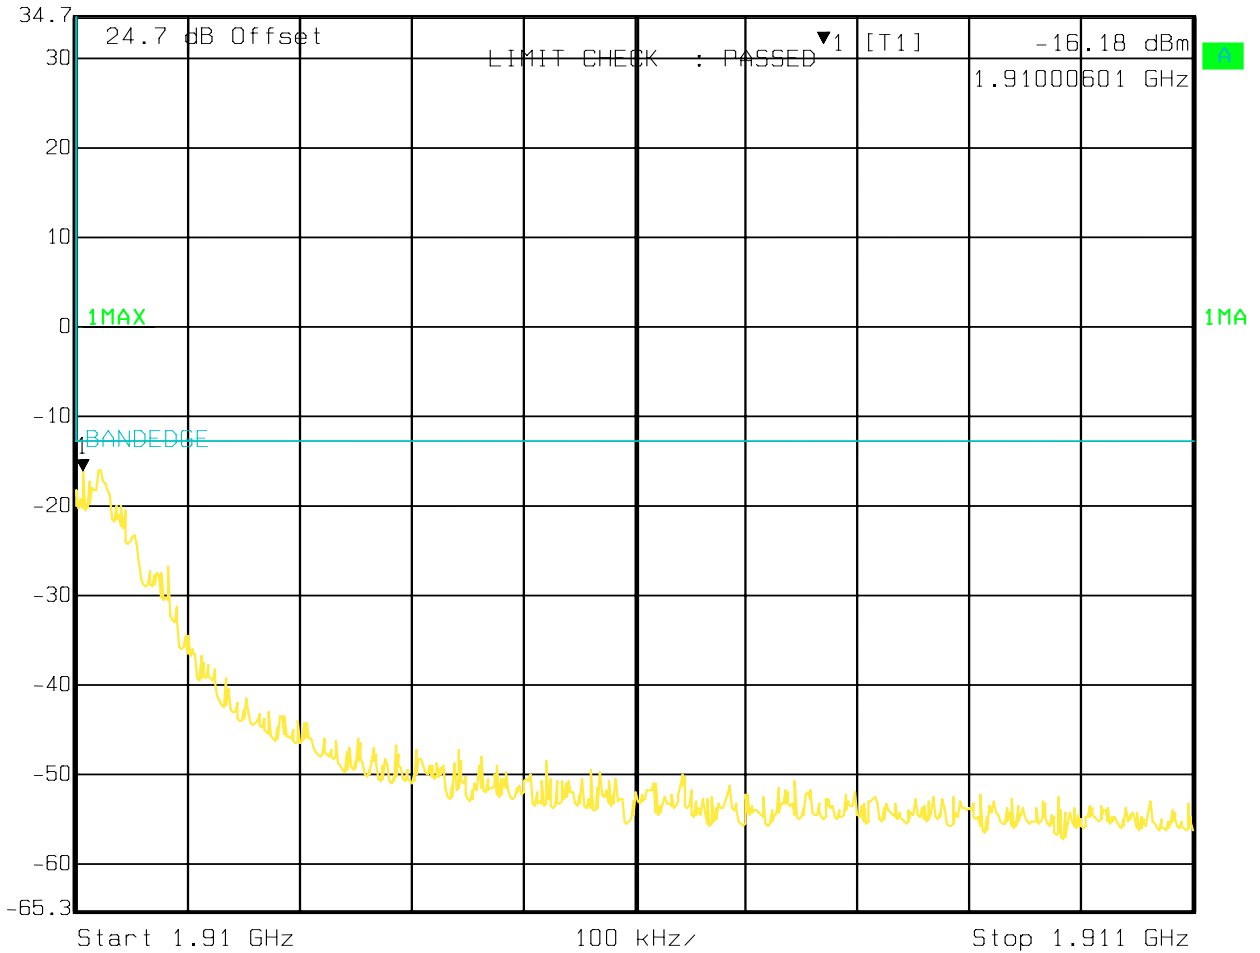


Date: 11.MAY 2009 10:36:53

### Lower Band Edge GSM1900 EGPRS



Marker: 1 [T1] RBW 3 kHz RF Att 30 dB  
Ref Lvl -17.07 dBm VBW 3 kHz  
34.7 dBm 1.84998798 GHz SWT 280 ms Unit dBm

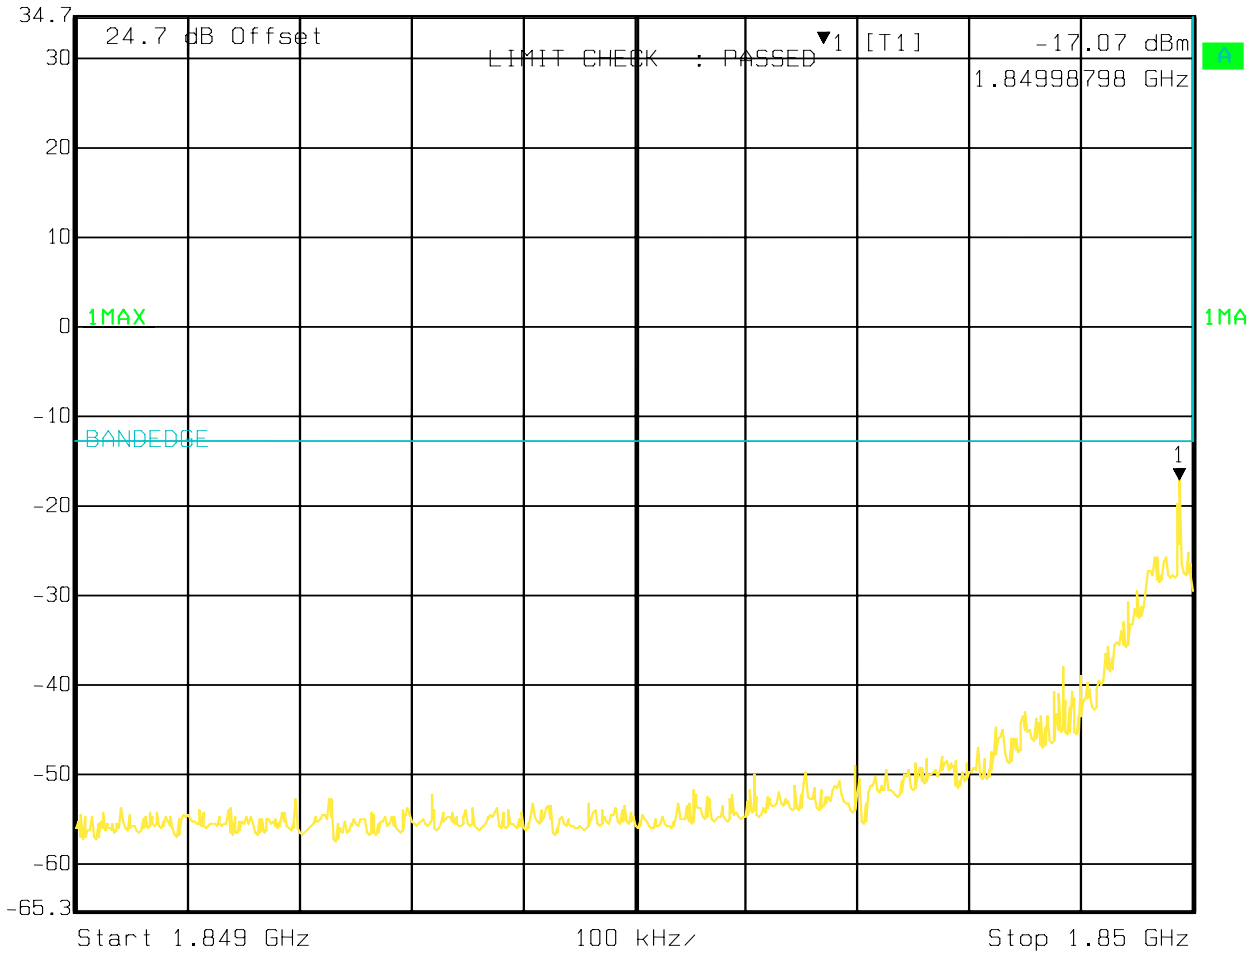


Date: 11.MAY 2009 10:39:08

### Lower Band Edge UMTS FDD5




Marker 1 [T1] RBW 50 kHz RF Att 40 dB  
Ref Lvl -16.02 dBm VBW 50 kHz  
44.7 dBm 824.00000000 MHz SWT 5 ms Unit dBm

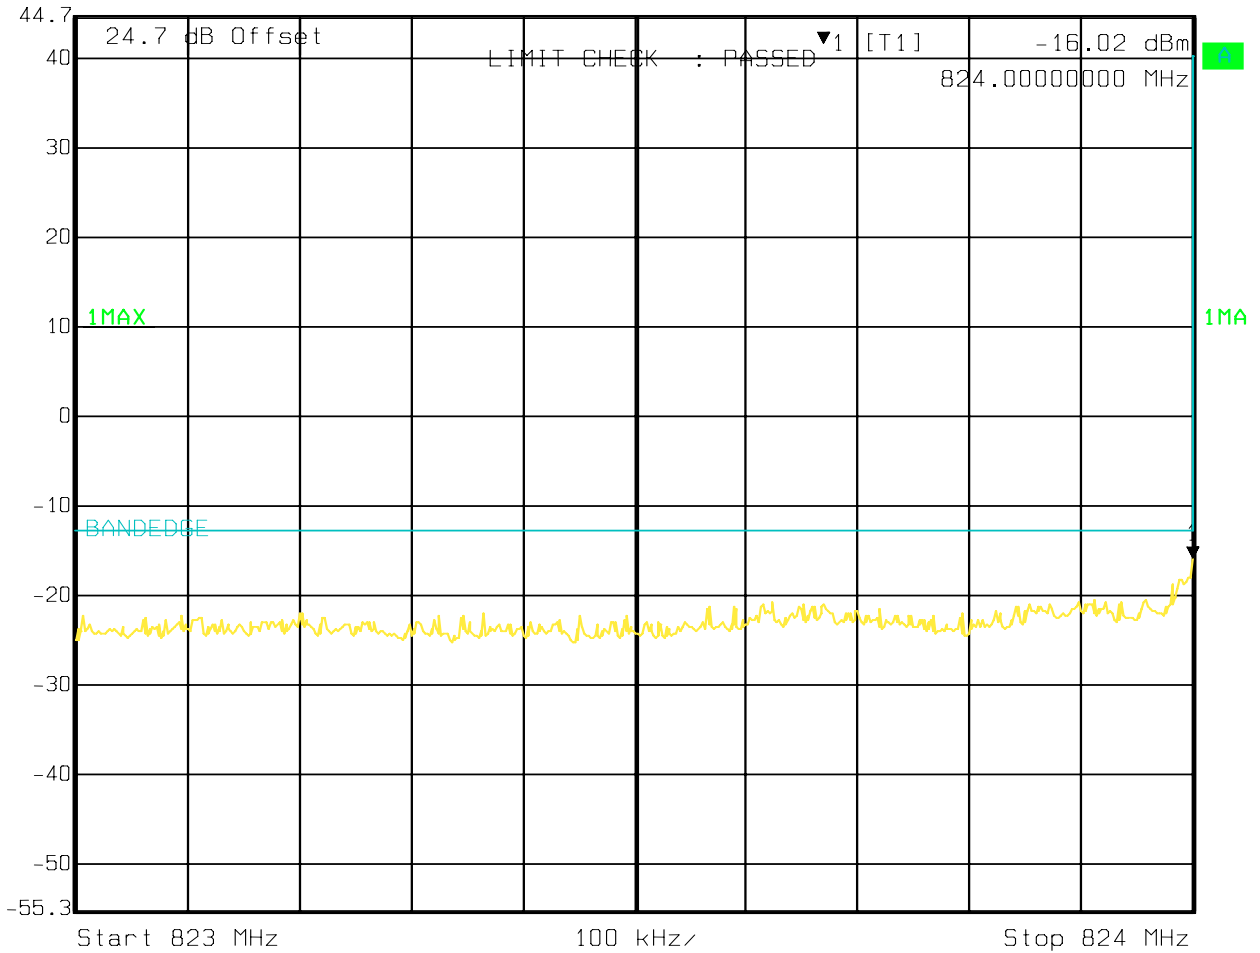

Date: 11.MAY 2009 12:38:08

### Upper Band Edge UMTS FDD5


 Ref Lvl 44.7 dBm      Marker 1 [T1] 849.32064128 MHz      RBW 50 kHz      RF Att 40 dB  
-19.59 dBm      VBW 50 kHz  
SWT 5 ms      Unit dBm

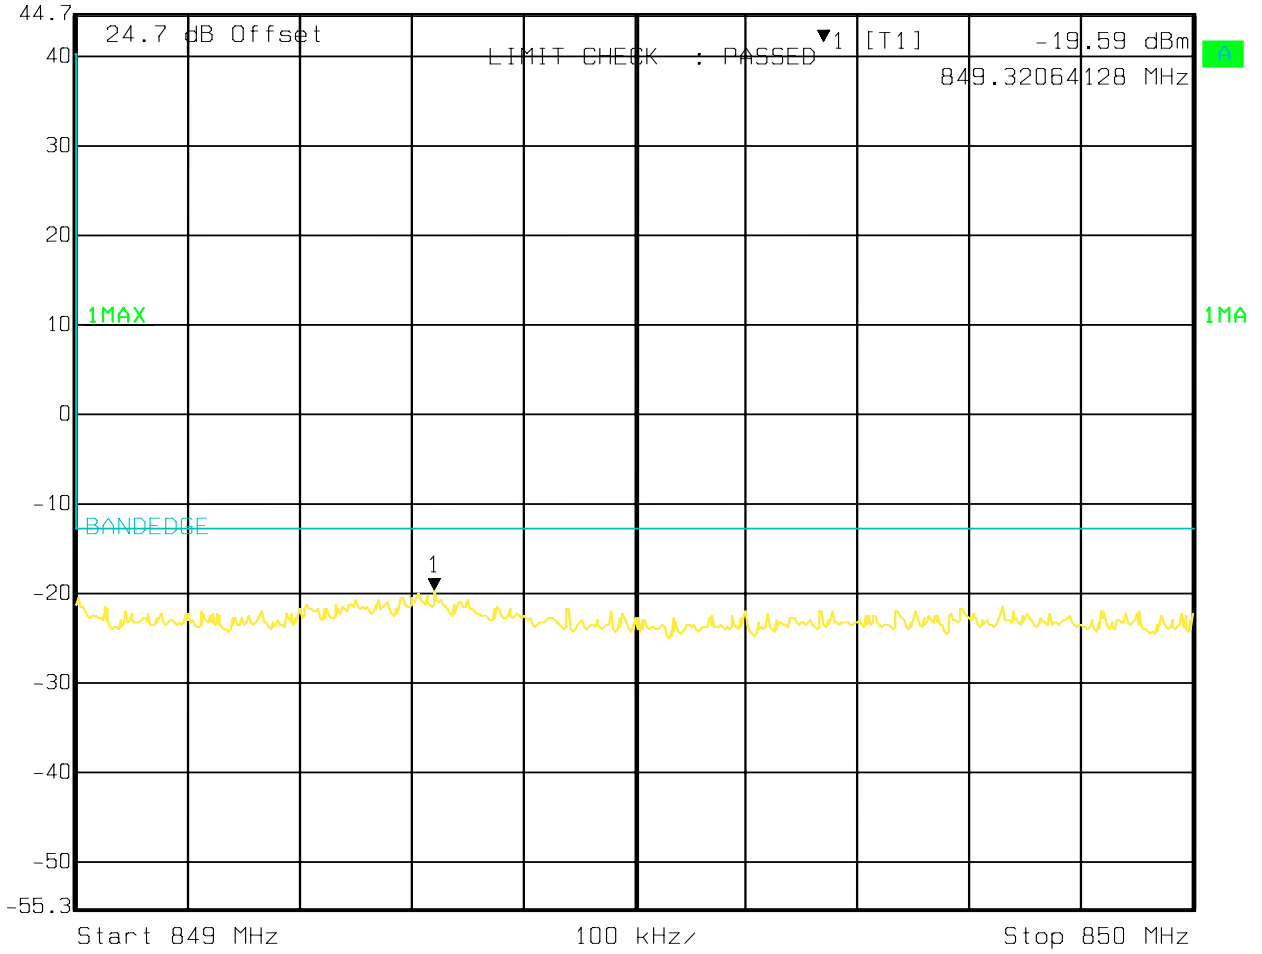

Date: 11.MAY 2009 12:39:18

### Lower Band Edge UMTS FDD2

 Ref Lvl 34.7 dBm      Marker 1 [T1] -22.63 dBm      RBW 50 kHz      RF Att 30 dB  
1.84983968 GHz      1.84983968 GHz      VBW 50 kHz      Unit dBm  
SWT 5 ms

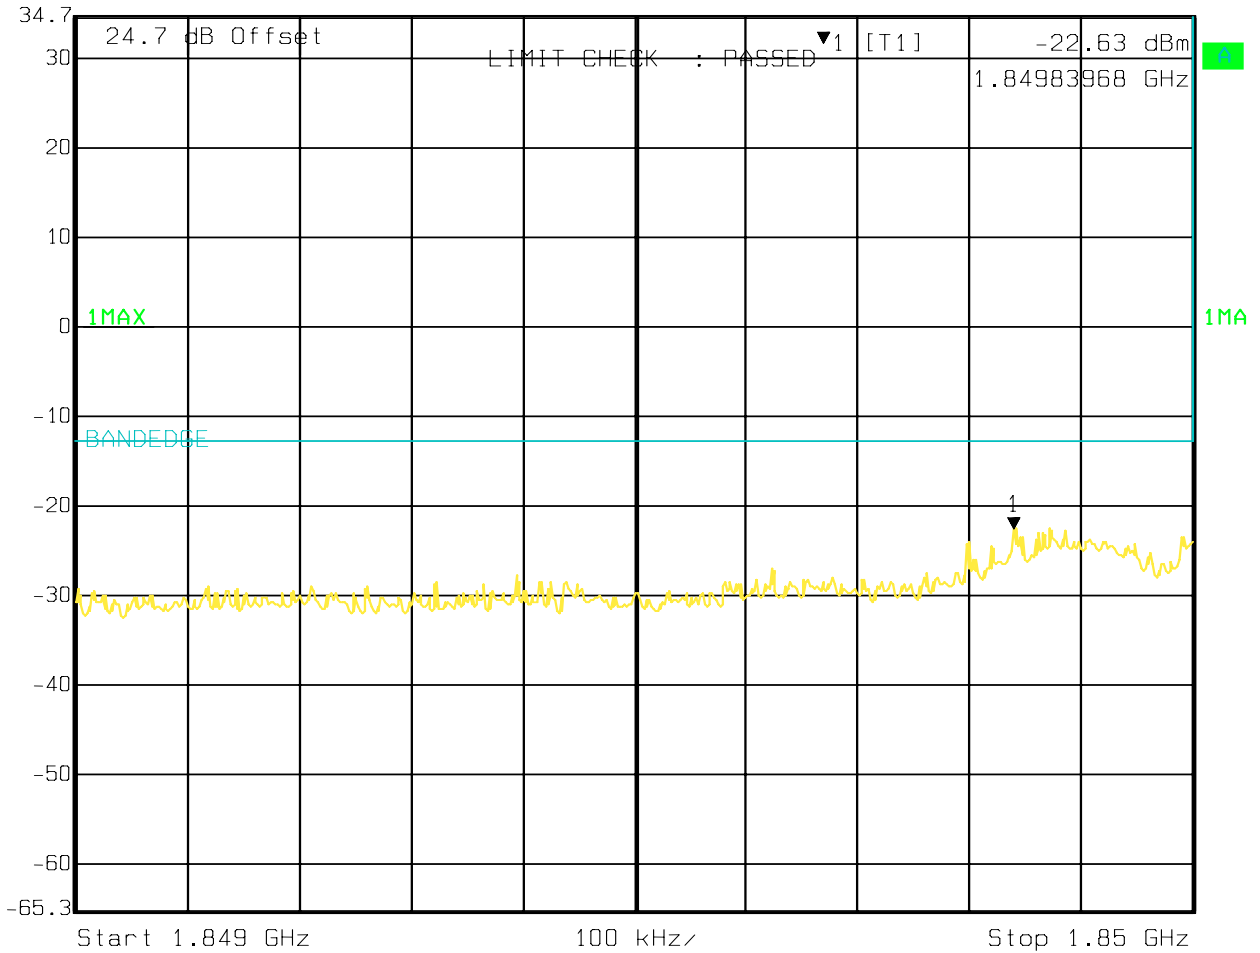


Date: 11.MAY 2009 11:51:27



### Upper Band Edge UMTS FDD2


 Ref Lvl 34.7 dBm      Marker 1 [T1] -24.06 dBm      RBW 50 kHz      RF Att 30 dB  
1.91007615 GHz      1.91007615 GHz      VBW 50 kHz      Unit dBm  
SWT 5 ms

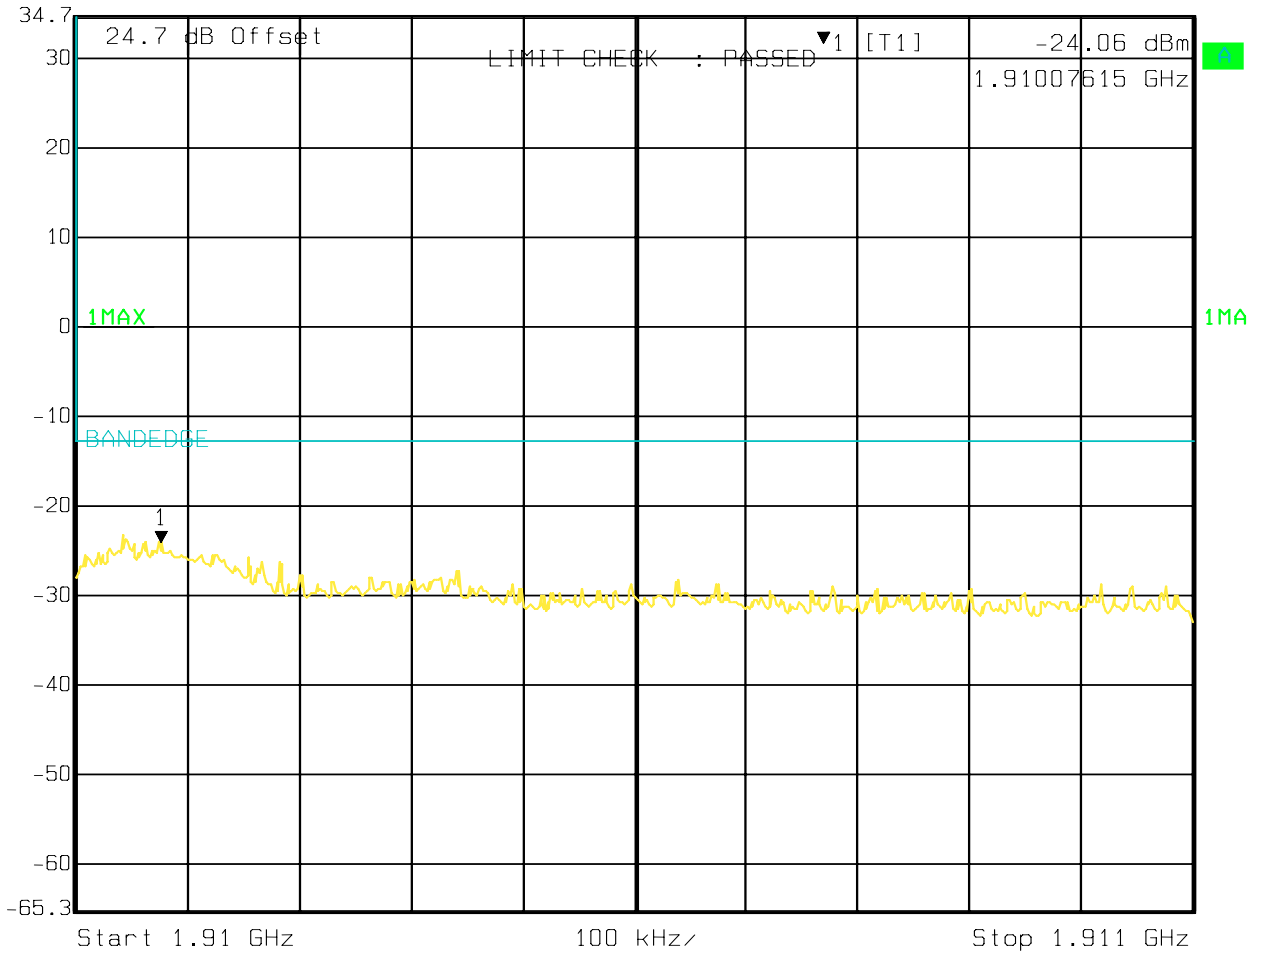

Date: 11.MAY 2009 11:50:25

**Conducted Out of band Emission GSM850 channel 128:**


**(Note that emission above limit is mobile station uplink.)**

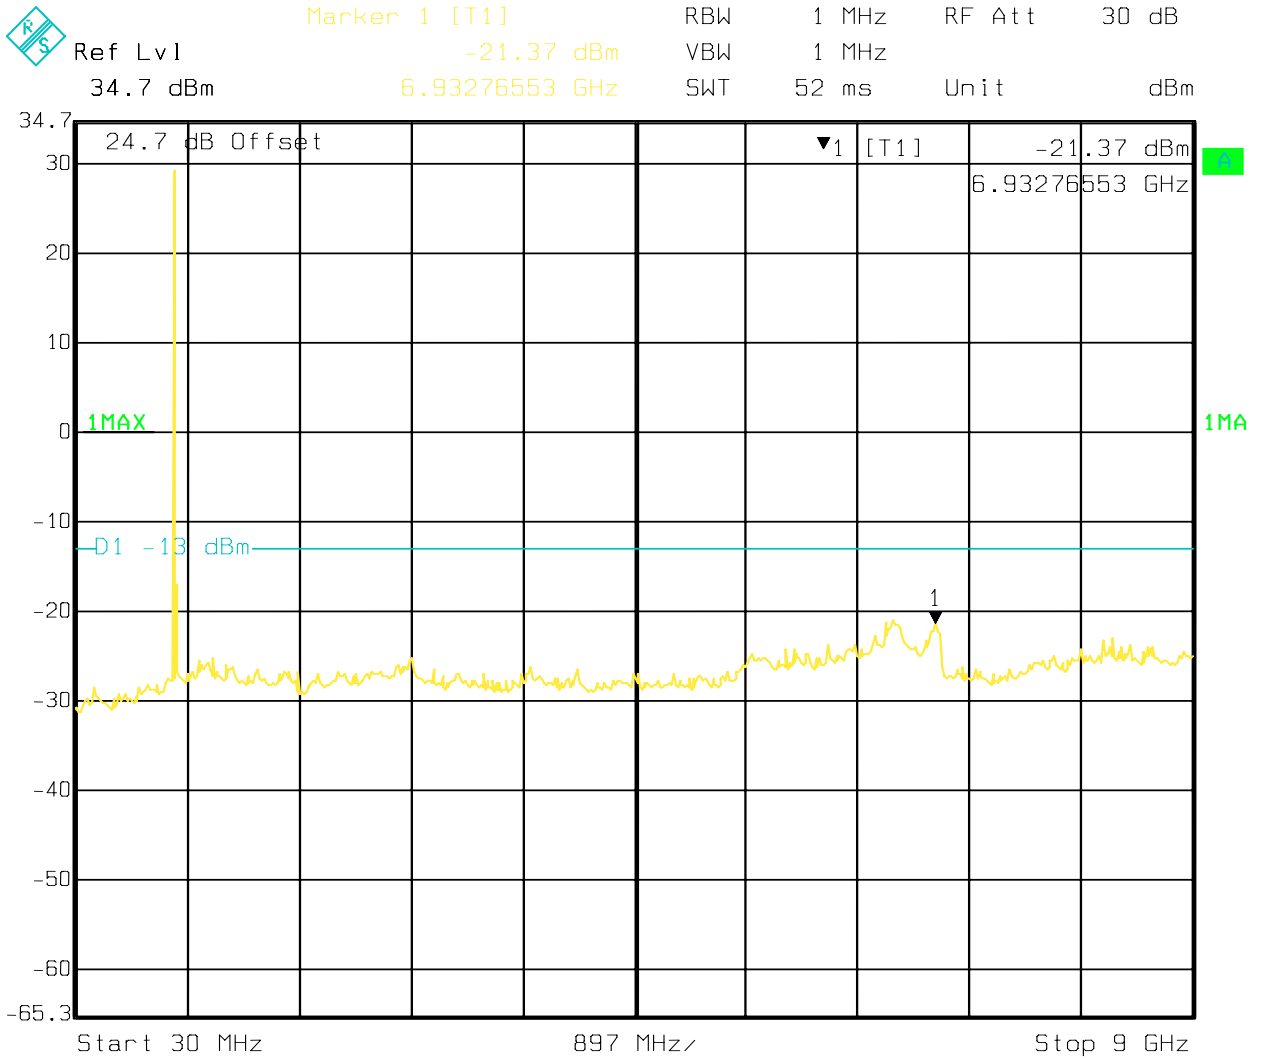

Date: 11.MAY 2009 10:25:08

**Conducted Out of band Emission GSM850 channel 190:  
(Note that emission above limit is mobile station uplink.)**

Ref Lvl 34.7 dBm      Marker 1 [T1] -21.03 dBm      RBW 1 MHz      RF Att 30 dB  
6.64515030 GHz      VBW 1 MHz  
SWT 52 ms      Unit dBm

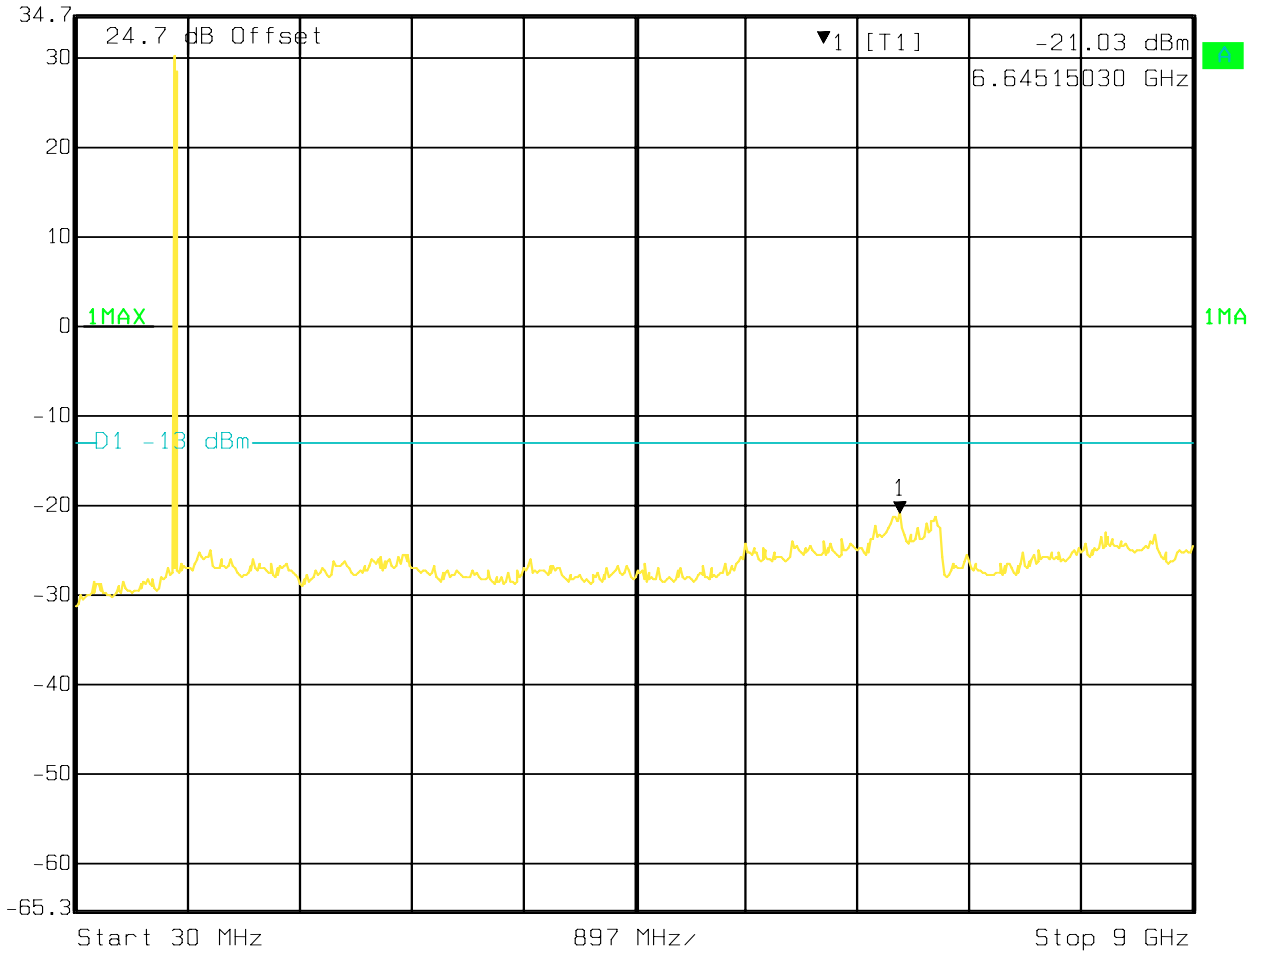


Date: 11.MAY 2009 10:24:18

**Conducted Out of band Emission GSM850 channel 251:**

**(Note that emission above limit is mobile station uplink.)**

Ref Lvl 34.7 dBm  
Marker 1 [T1] 6.63330661 GHz -21.45 dBm  
RBW 1 MHz RF Att 30 dB  
VBW 1 MHz  
SWT 115 ms Unit dBm

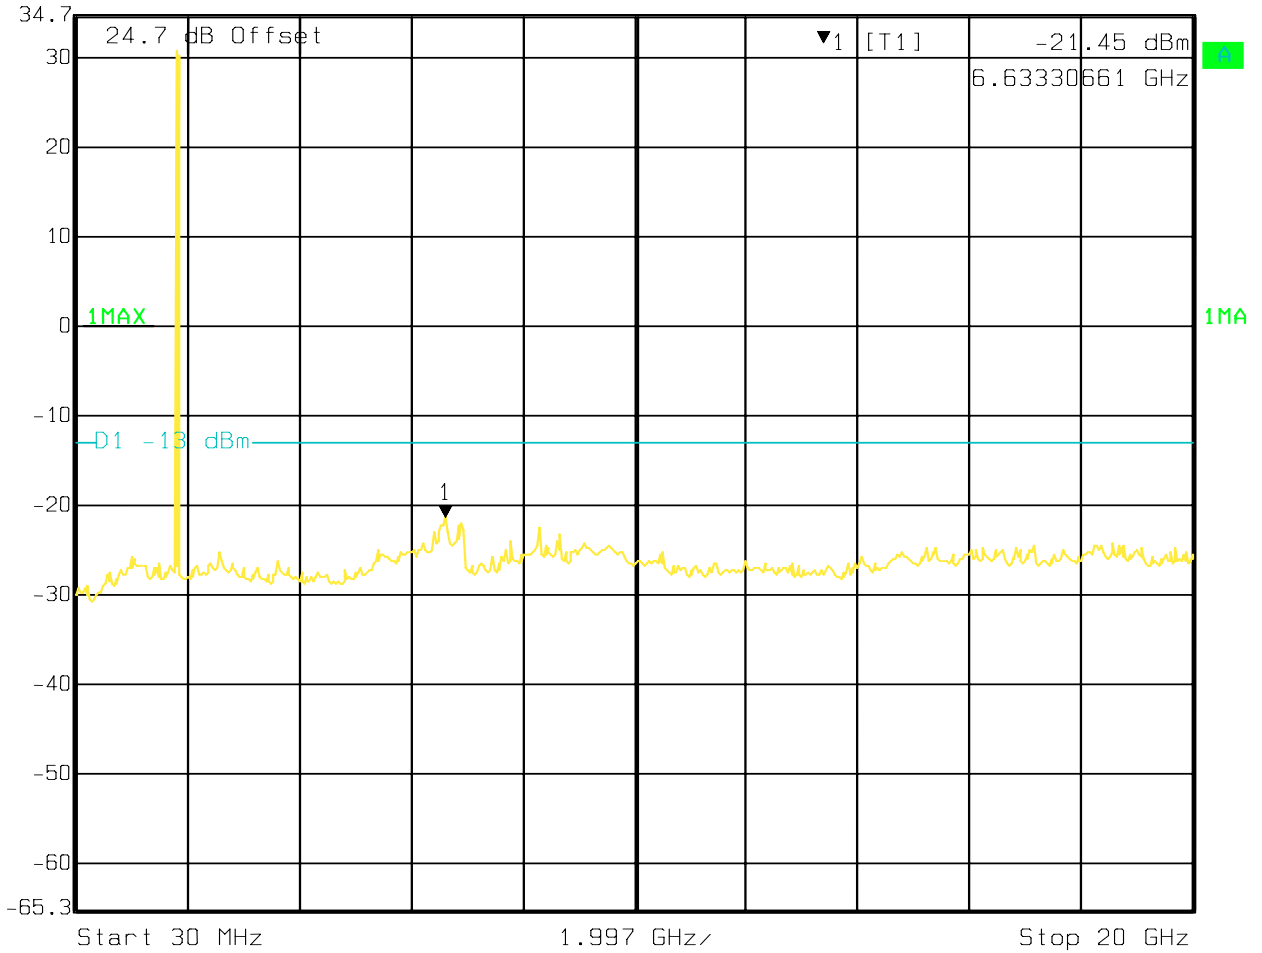


Date: 11.MAY 2009 10:31:47

**Conducted Out of band Emission GSM1900 channel 512:**

**(Note that marked emission is mobile station uplink.)**

Ref Lvl 34.7 dBm      Marker 1 [T1] -19.25 dBm      RBW 1 MHz      RF Att 30 dB  
24.7 dB Offset      6.59328657 GHz      VBW 1 MHz  
SWT 115 ms      Unit dBm

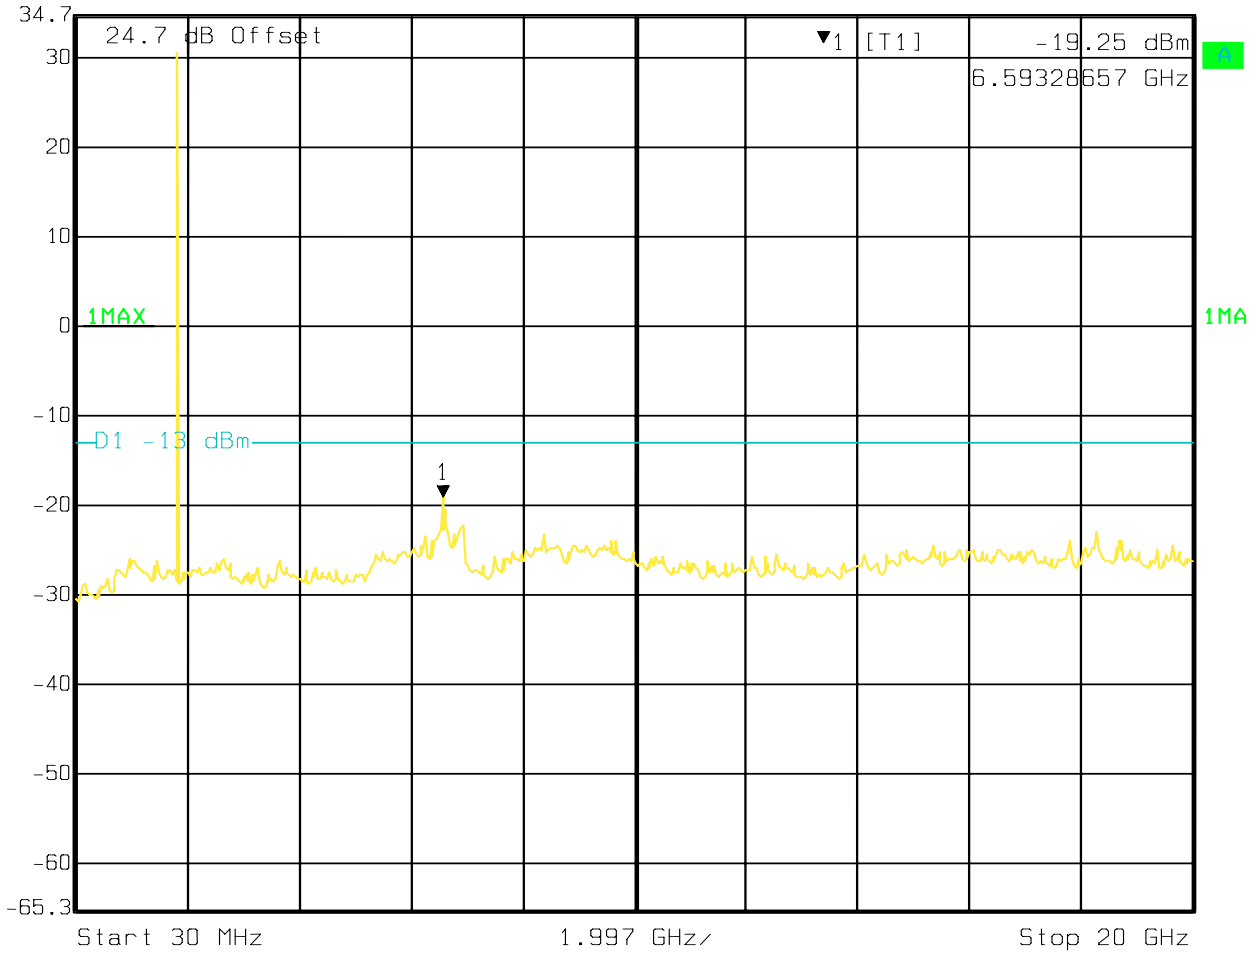


Date: 11.MAY 2009 10:32:49

**Conducted Out of band Emission GSM1900 channel 661:**

**(Note that emission above limit is mobile station uplink.)**


Marker: 1 [T1]
RBW 1 MHz
RF Att 30 dB  
Ref Lvl 34.7 dBm
-20.97 dBm
VBW 1 MHz  
6.59328657 GHz
SWT 115 ms
Unit dBm

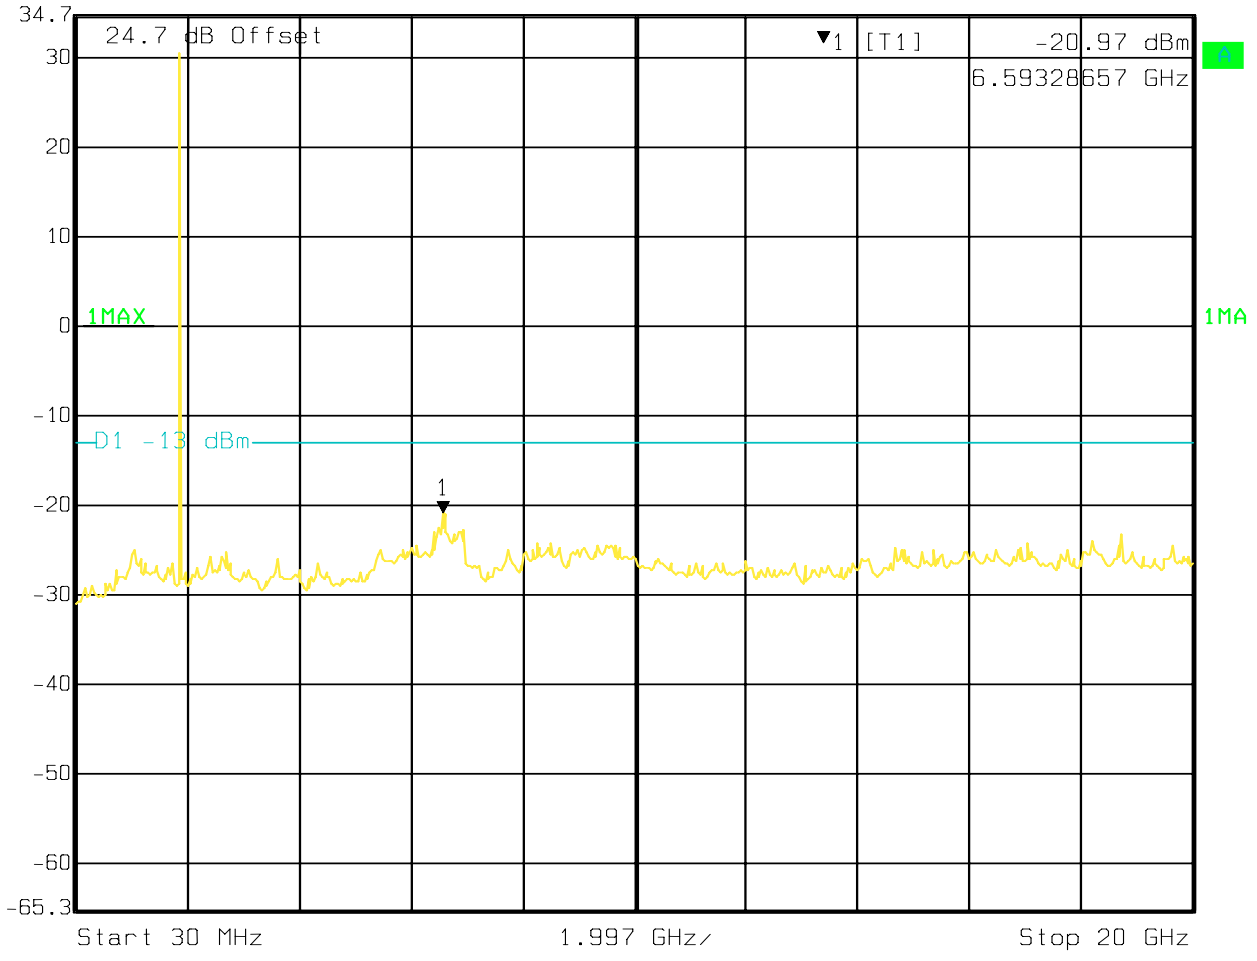


Date: 11.MAY 2009 10:33:31

**Conducted Out of band Emission GSM1900 channel 810:**

**(Note that emission above limit is mobile station uplink.)**

Ref Lvl 34.7 dBm      Marker: 1 [T1] -21.68 dBm      RBW 1 MHz      RF Att 30 dB  
6.91344689 GHz      VBW 1 MHz  
SWT 115 ms      Unit dBm

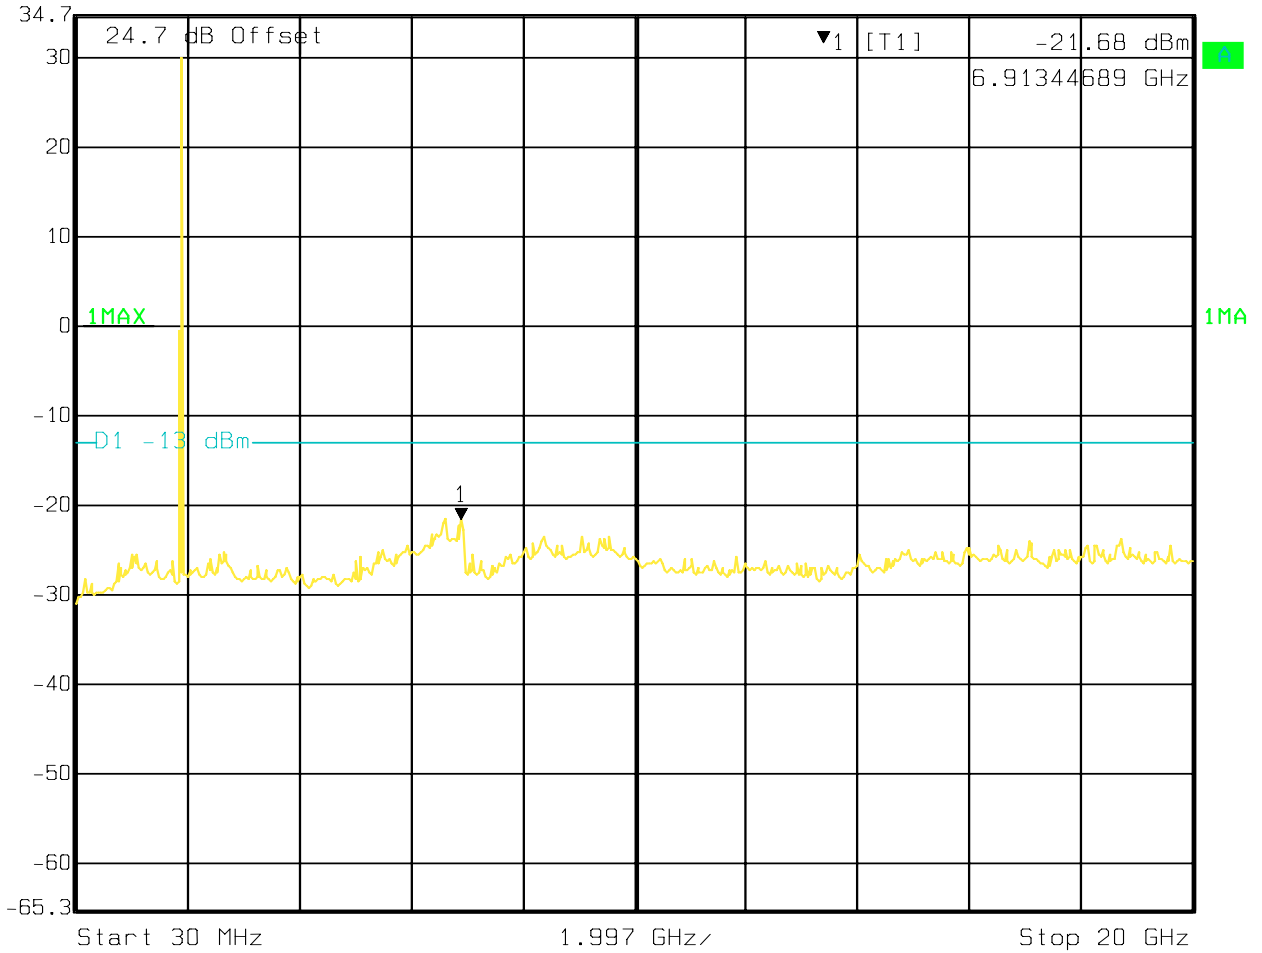


Date: 11.MAY 2009 10:34:18

**Conducted Out of band Emission UMTS FDD5 channel 4132:**

**(Note that emission above limit is mobile station uplink.)**

Ref Lvl 34.7 dBm      Marker 1 [T1] -21.15 dBm      RBW 1 MHz      RF Att 30 dB  
24.7 dB Offset      6.93276553 GHz      VBW 1 MHz  
SWT 52 ms      Unit dBm

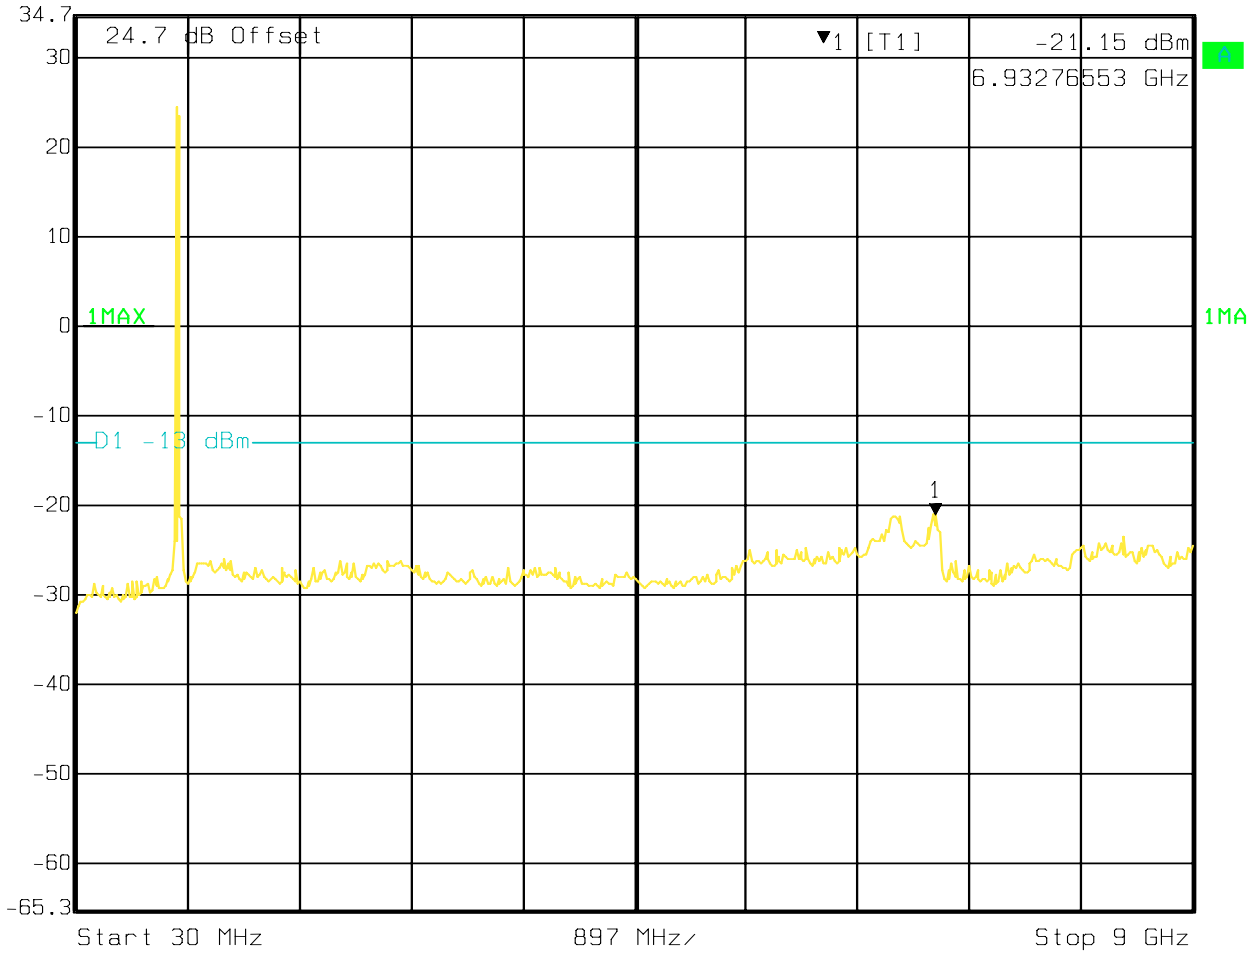


Date: 11.MAY 2009 12:16:45



**Conducted Out of band Emission UMTS FDD5 channel 4183:**

**(Note that emission above limit is mobile station uplink.)**


Ref Lvl 34.7 dBm      Marker 1 [T1] -20.34 dBm      RBW 1 MHz      RF Att 30 dB  
6.57324649 GHz      VBW 1 MHz  
SWT 52 ms      Unit dBm

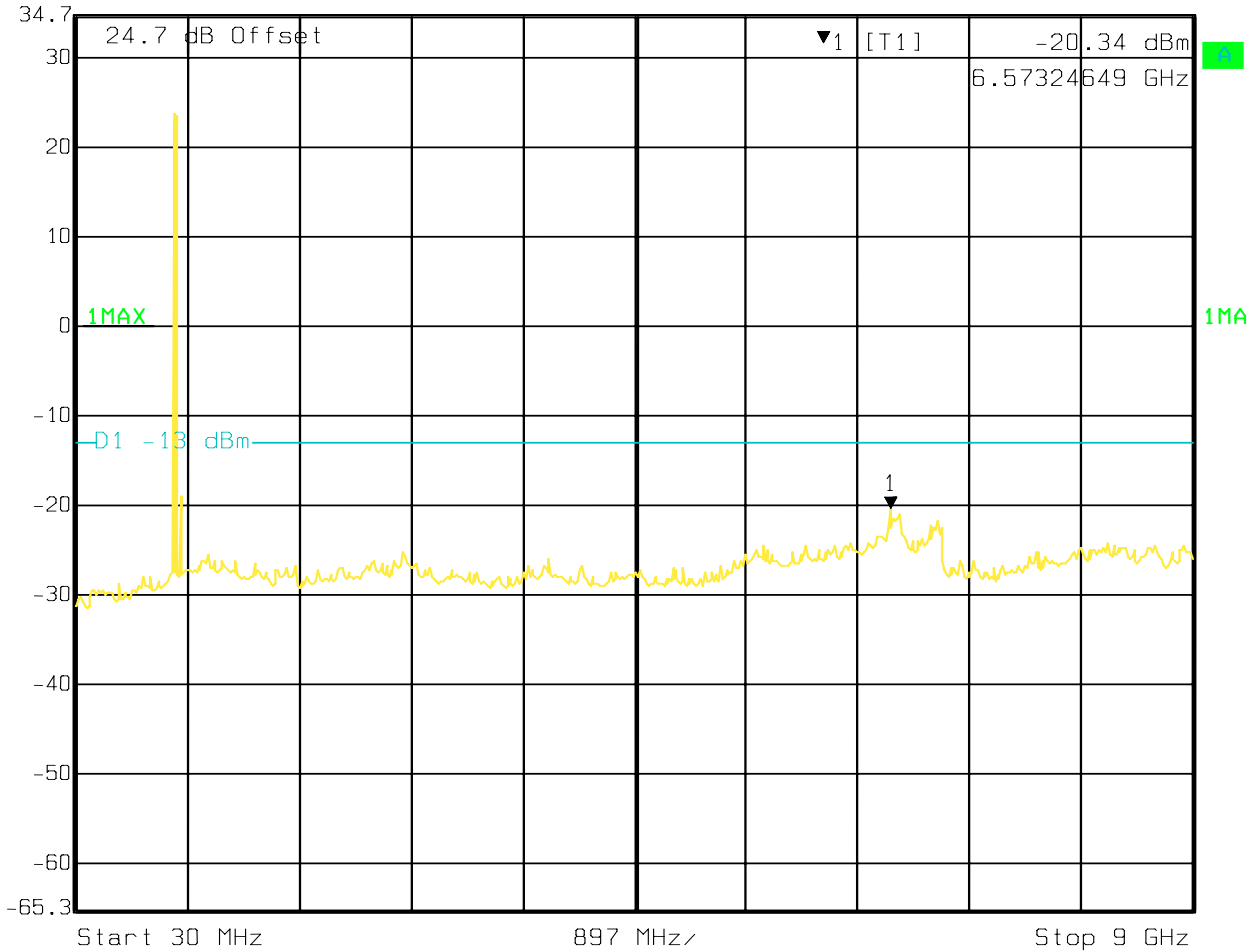

Date: 11.MAY 2009 12:16:08

**Conducted Out of band Emission UMTS FDD5 channel 4233:**


**(Note that marked emission is mobile station uplink.)**

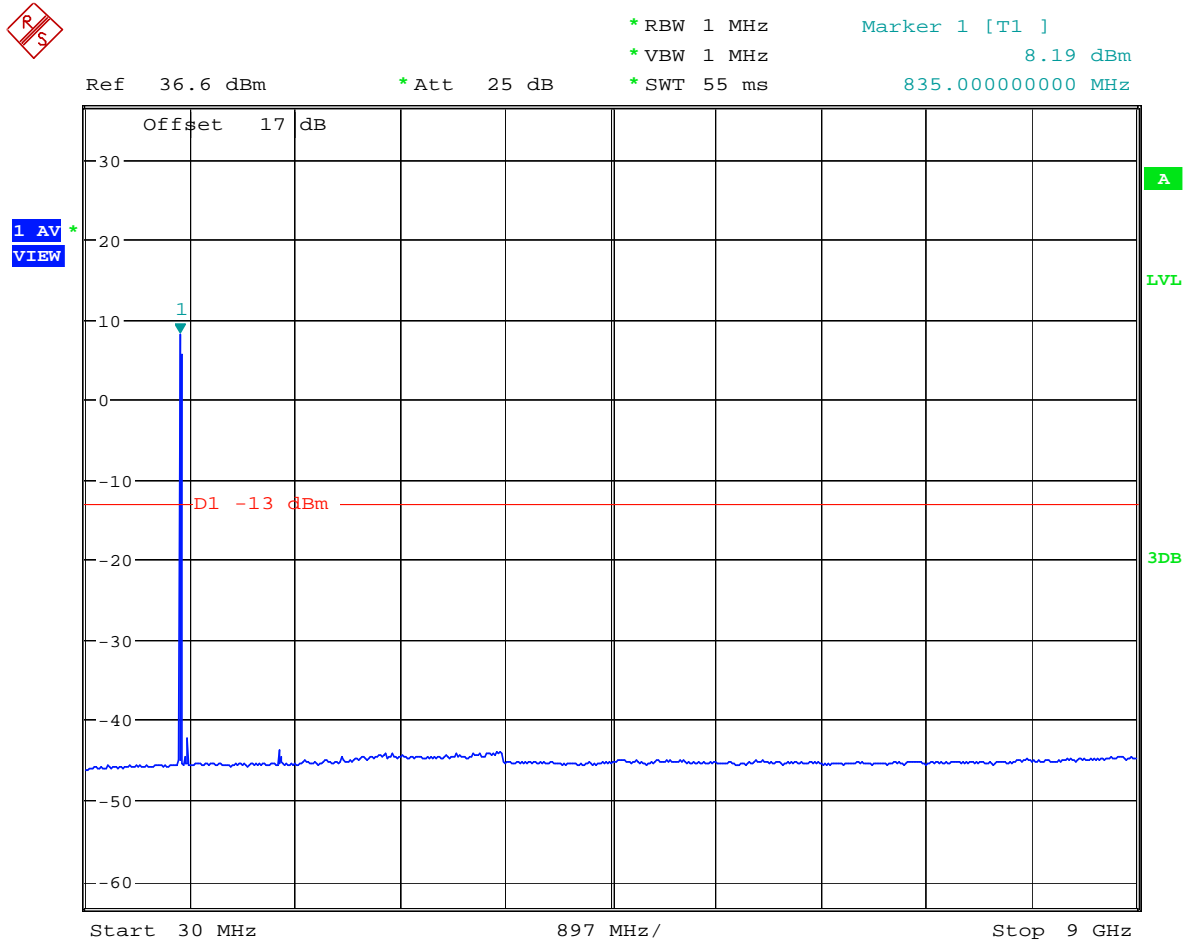

Date: 19.MAY.2009 17:07:57

**Conducted Out of band Emission UMTS FDD2 channel 9262:**

**(Note that marked emission is mobile station uplink.)**

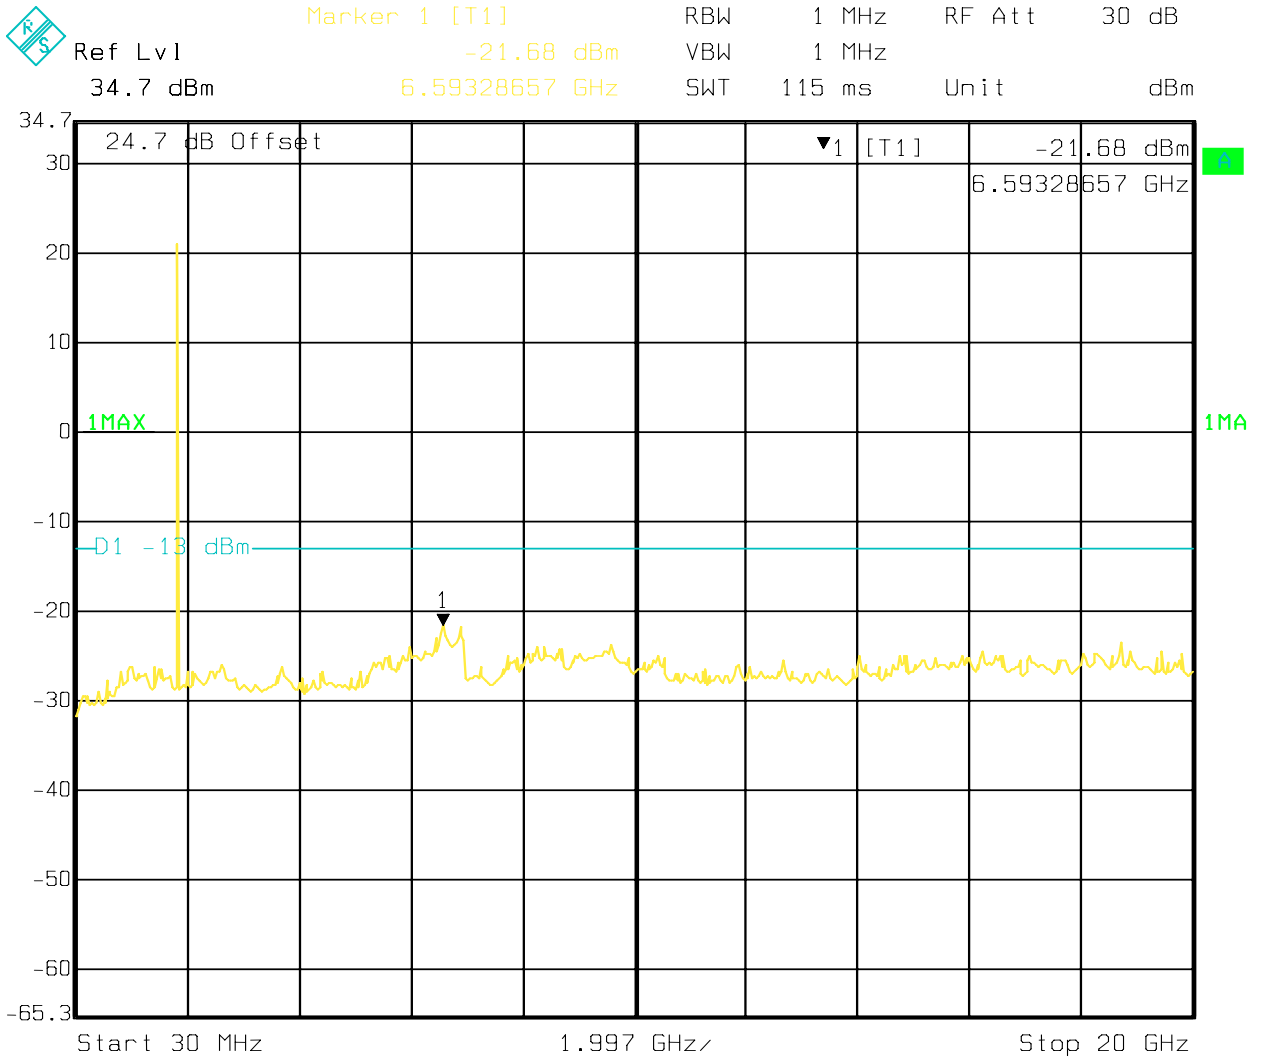


Date: 11.MAY 2009 11:54:13

**Conducted Out of band Emission UMTS FDD2 channel 9400:**

**(Note that marked emission is mobile station uplink.)**

 Ref Lvl 34.7 dBm      Marker: 1 [T1] -20.73 dBm      RBW 1 MHz      RF Att 30 dB  
6.67332665 GHz      VBW 1 MHz  
SWT 115 ms      Unit dBm

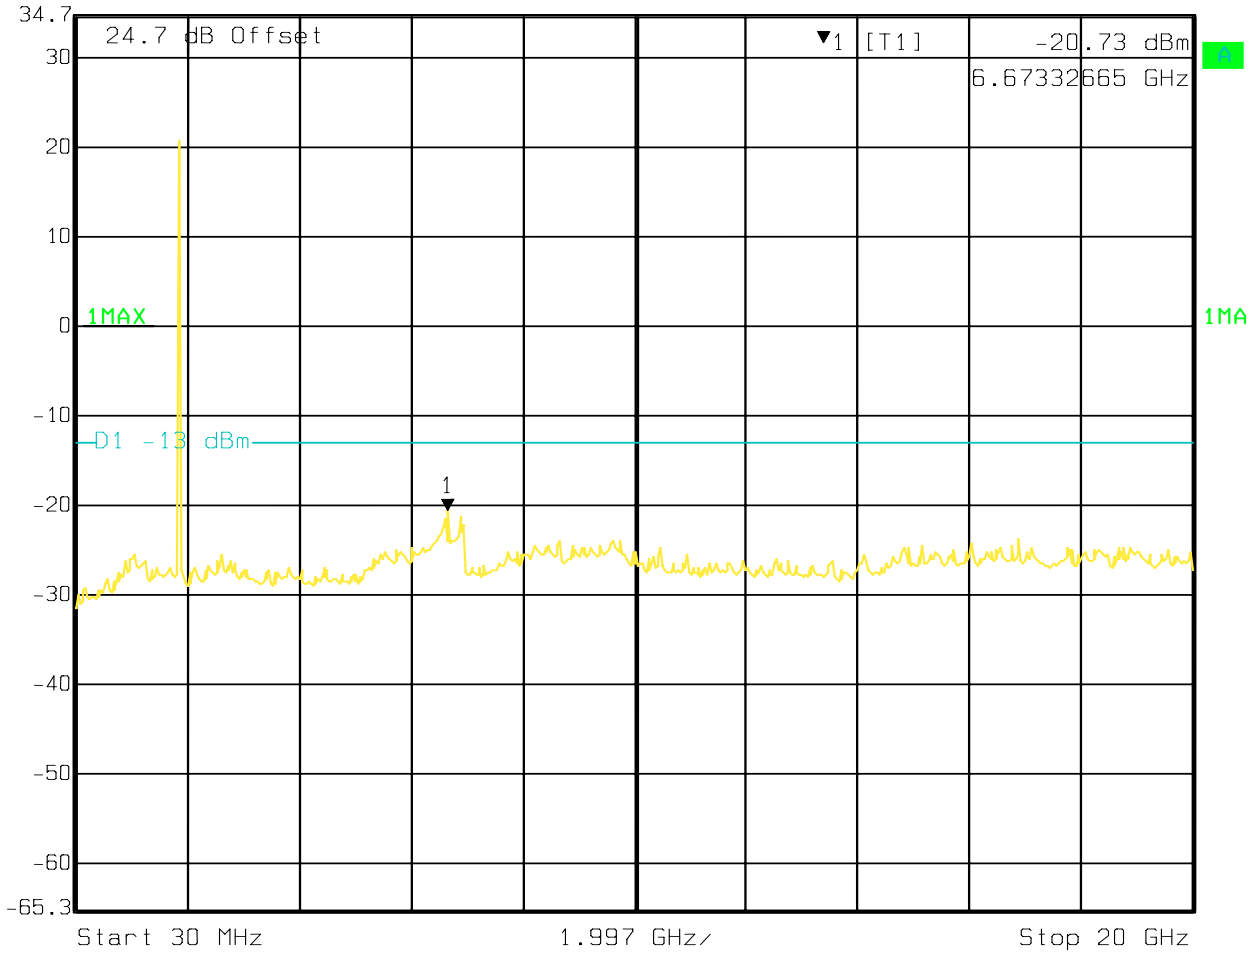


Date: 11.MAY 2009 12:01:39

**Conducted Out of band Emission UMTS FDD2 channel 9538:**

**(Note that marked emission is mobile station uplink.)**

 Ref Lvl 34.7 dBm      Marker: 1 [T1] -20.64 dBm      RBW 1 MHz      RF Att 30 dB  
6.63330661 GHz      VBW 1 MHz  
SWT 115 ms      Unit dBm

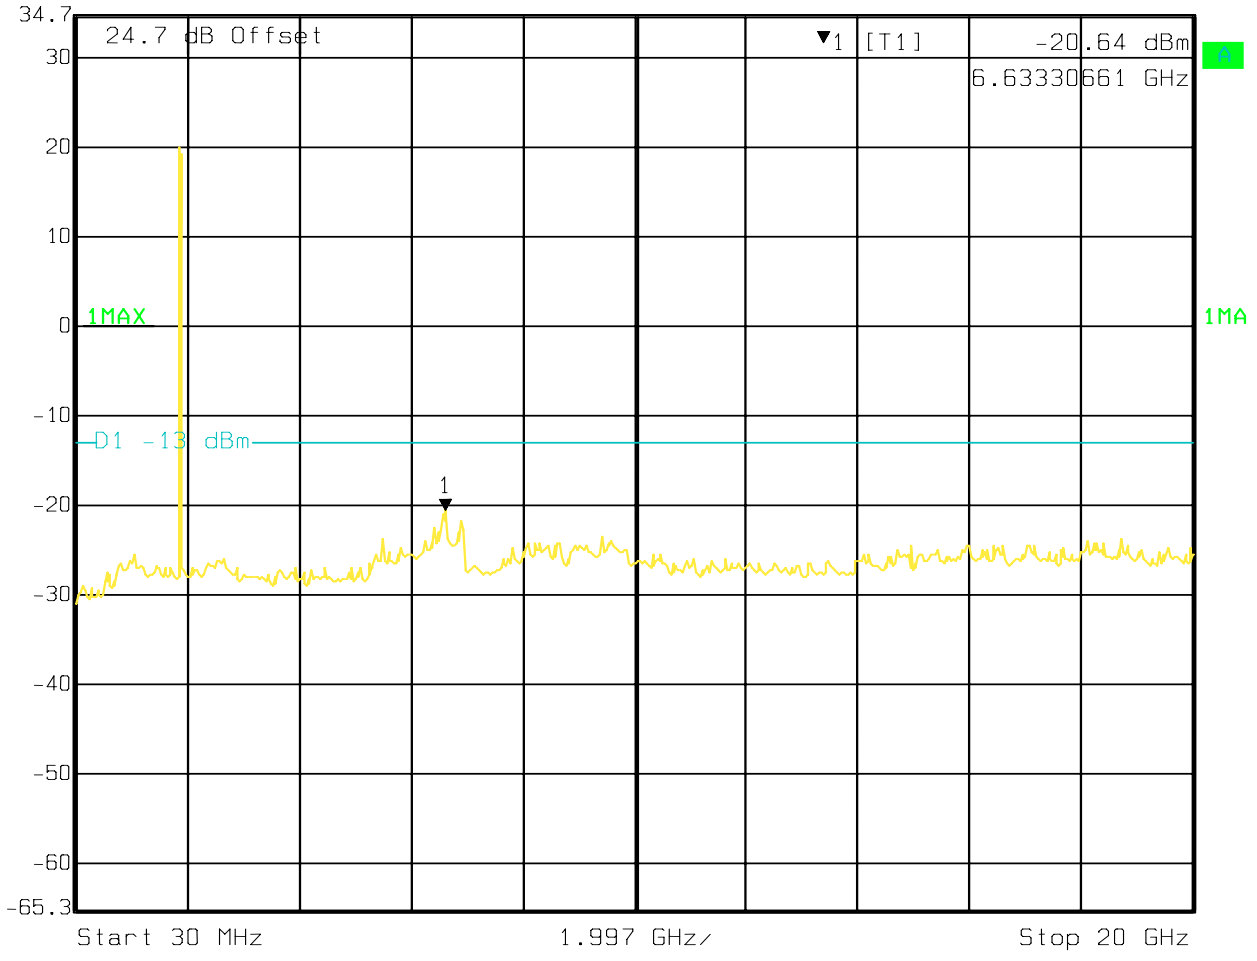


Date: 11.MAY 2009 12:02:37

### Conducted Out of band Emission Receiver Mode



Marker 1 [T1] RBW 1 MHz RF Att 10 dB  
Ref Lvl -40.75 dBm VBW 1 MHz  
4.7 dBm 6.63330661 GHz SWT 115 ms Unit dBm

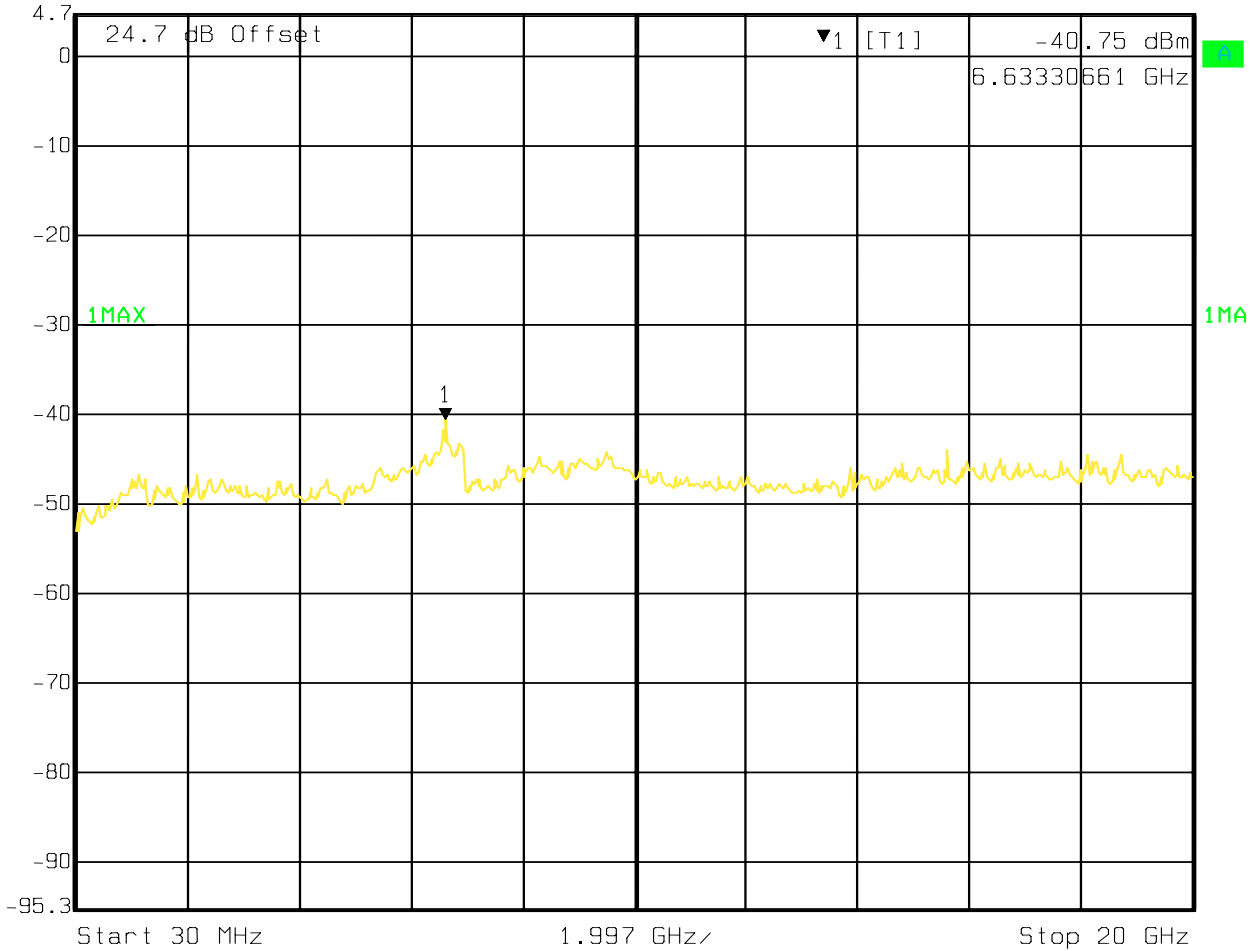

Date: 11.MAY 2009 12:18:25

## 5.5 Spurious Emissions Radiated

### 5.5.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

### 5.5.2 Limits:

#### 5.5.2.1 **FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### 5.5.2.2 **FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The

emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 5.5.3 Radiated out of band measurement procedure:

Based on TIA-603C 2004

#### 2.2.12 Unwanted emissions: Radiated Spurious

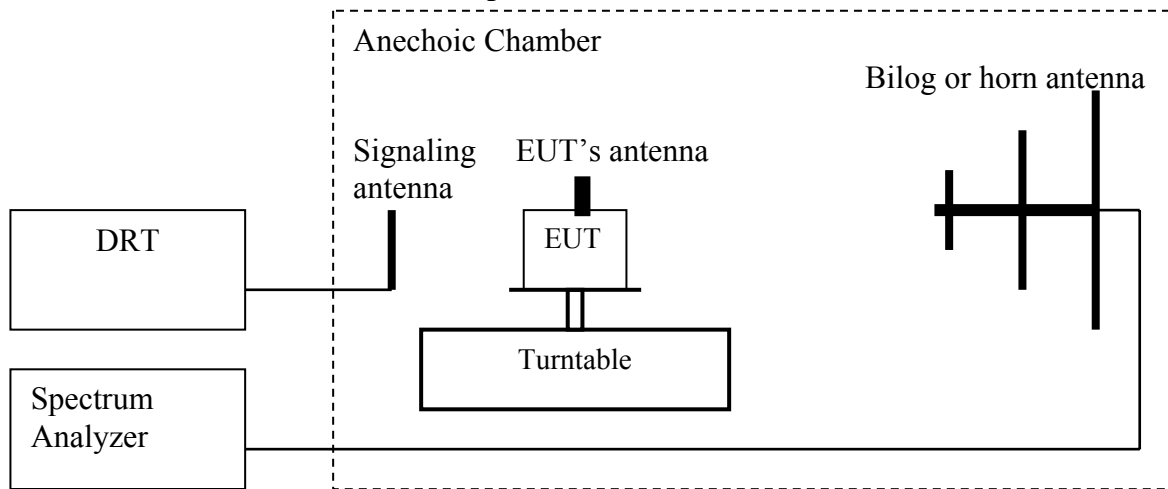

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (LVL) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (LOSS).  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$ .
7. Determine the level of spurious emissions using the following equation:  
**Spurious (dBm) = LVL (dBm) + LOSS (dB):**
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:  
**Spurious (dBm) = LVL (dBm) + LOSS (dB):**
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.



(note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

**Spectrum analyzer settings:**

Res B/W: 1 MHz

Vid B/W: 1 MHz

**Measurement Survey:**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

Radiated emission measurements were made only with Circuit Switched mode GMSK modulation because this mode represents the worse case emission for all the modulations for GSM. See section 5.5.4.1 and 5.5.4.3

Radiated emissions measurements were made also with UMTS FDD mode. See section 5.5.4.2 and 5.5.4.4

#### 5.5.4 Radiated out of band emissions results on EUT:

##### 5.5.4.1 Test Results Transmitter Spurious Emission GSM850:

Harmonics	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
2	1648.4	NF	1673.2	NF	1697.6	NF
3	2472.6	NF	2509.8	NF	2546.4	NF
4	3296.8	NF	3346.4	NF	3395.2	NF
5	4121	NF	4183	NF	4244	NF
6	4945.2	NF	5019.6	NF	5092.8	NF
7	5769.4	NF	5856.2	NF	5941.6	NF
8	6593.6	NF	6692.8	NF	6790.4	NF
9	7417.8	NF	7529.4	NF	7639.2	NF
10	8242	NF	8366	NF	8488	NF
NF = NOISE FLOOR						



**RADIATED SPURIOUS EMISSIONS (GSM-850) TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical**

**Note:**

**1. The peak above the limit line is the carrier freq.**

**2. This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303

Customer:: Apple

Test Mode: GSM 850 CH 190

ANT Orientation: V

EUT Orientation: V


Test Engineer: Sam

Voltage: FCC AC

Comments:

***SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

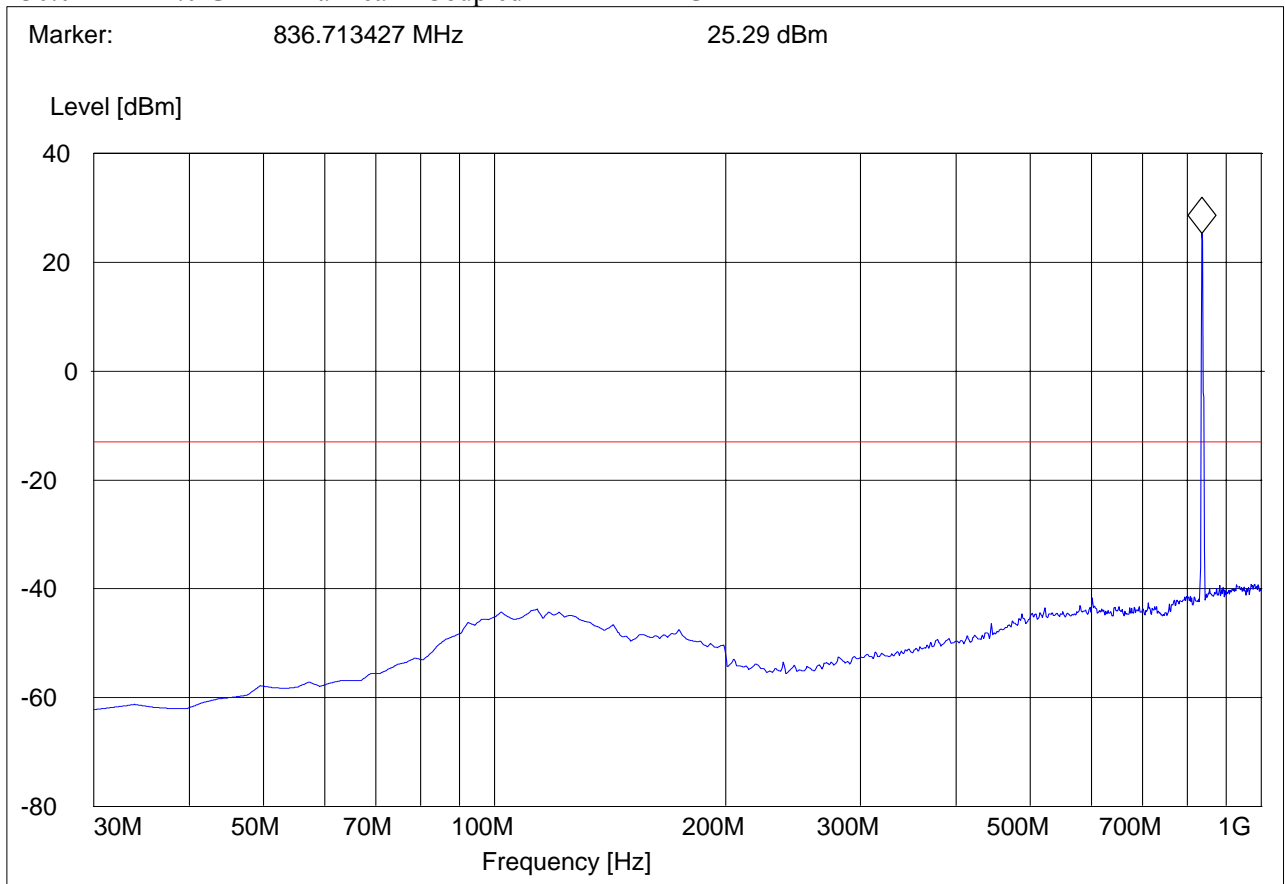



**RADIATED SPURIOUS EMISSIONS (GSM-850)TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: horizontal**


**Note:**

1. The peak above the limit line is the carrier freq.
2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: A1303  
 Customer:: Apple  
 Test Mode: GSM 850 CH 190  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Sam  
 Voltage: FCC AC  
 Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_H"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

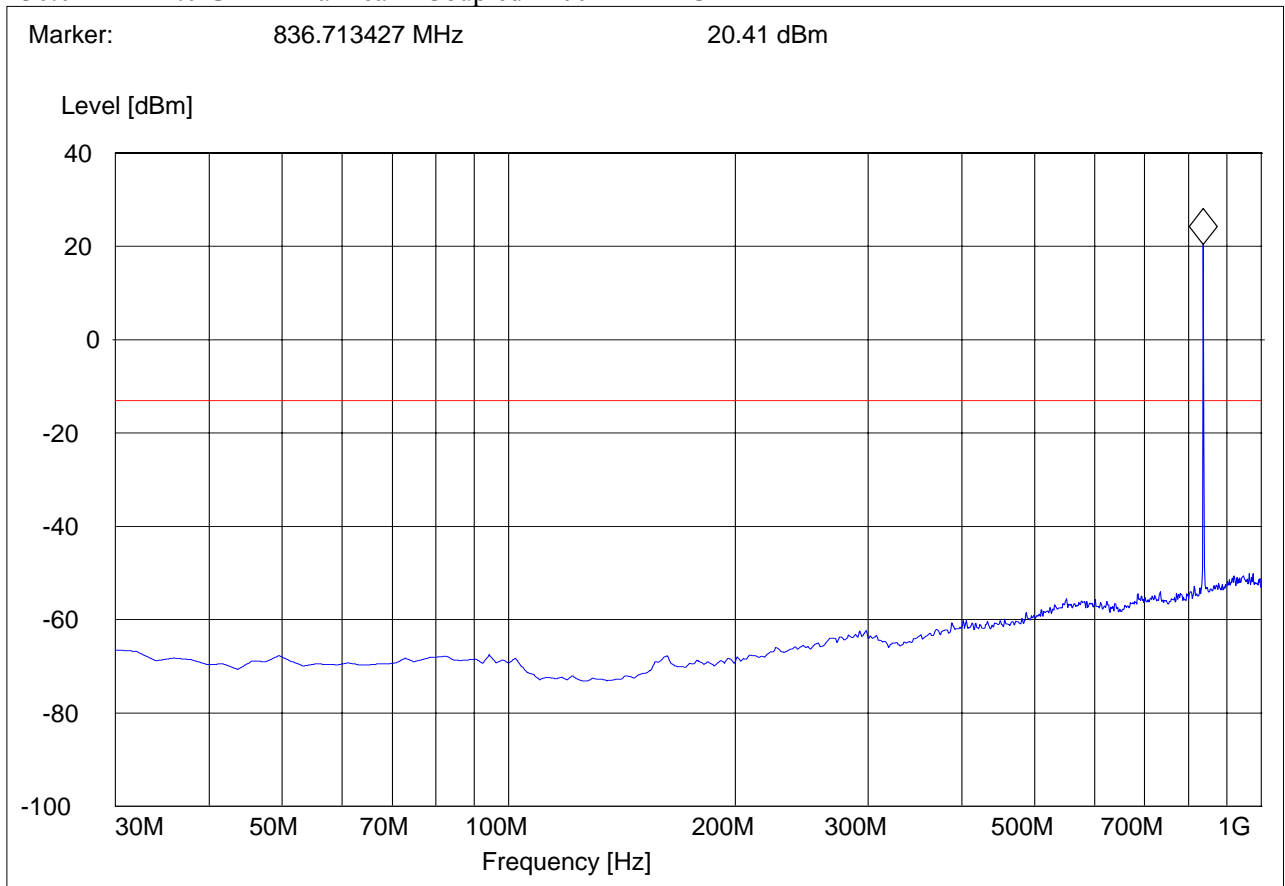

**RADIATED SPURIOUS EMISSIONS (GSM-850) CHANNEL 128 Tx : 1GHz – 18GHz**

**Final Result 1**


Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
17210.260521	-15.3	1000.000	1000.000	120.0	H	0.0	-47.9	2.3	-13.0

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
17210.260521	

**FCC 22 1-18GHz**

FCC 22 1-18GHz

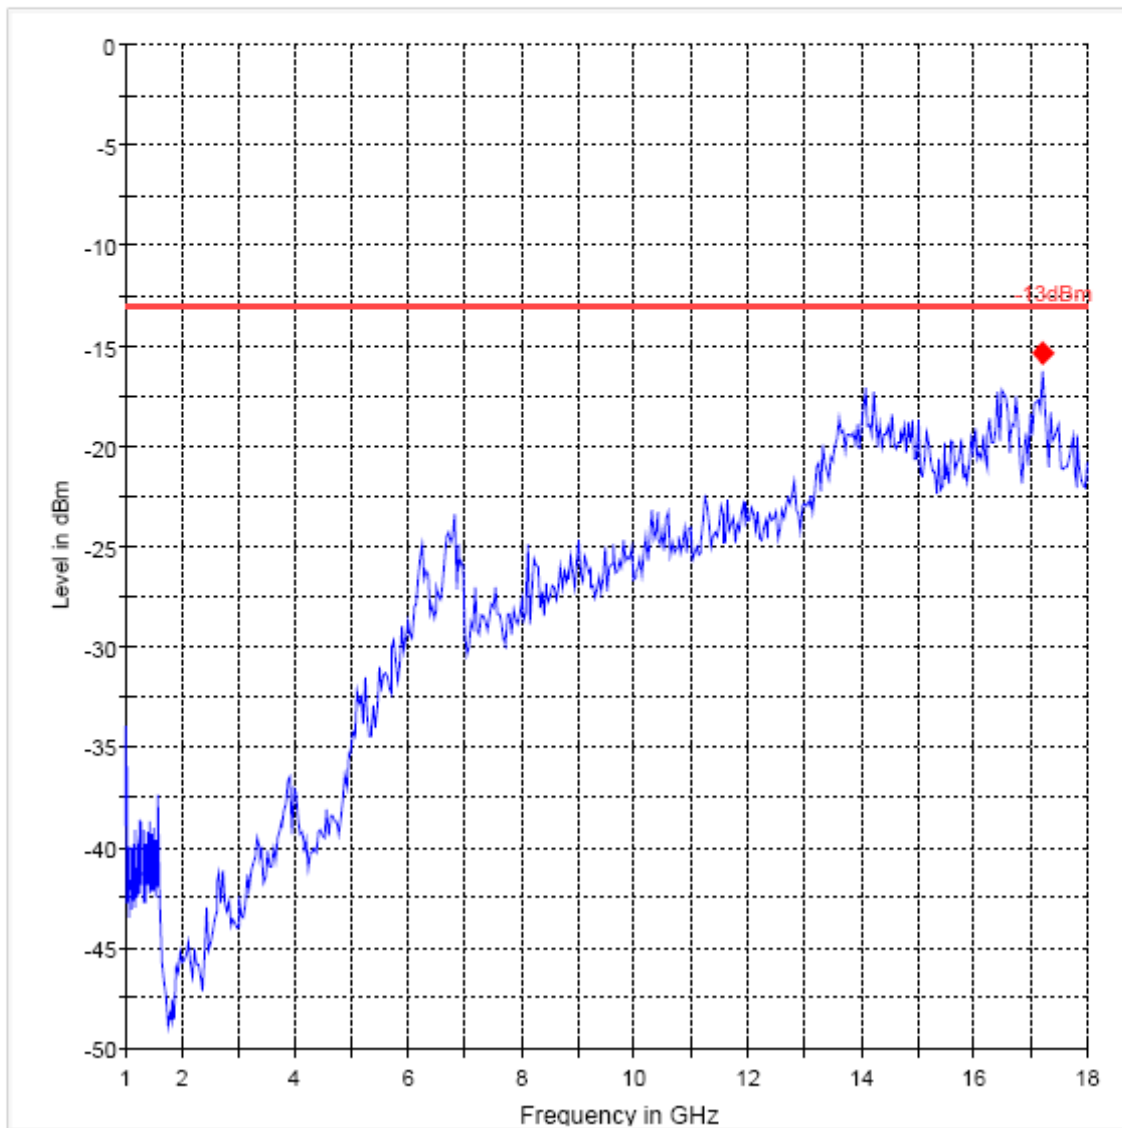

— -13dBm.LimitLine     
 — Preview Result 1     
 ◆ Final Result 1

**RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 190: 1GHz – 18GHz  
Channel 190**


**Final Result 1**

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
14084.208417	-15.2	1000.000	1000.000	177.0	H	84.0	-49.4	2.2	-13.0
17210.260521	-15.4	1000.000	1000.000	161.0	H	50.0	-47.9	2.4	-13.0

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
14084.208417	
17210.260521	

FCC 22 1-18GHz

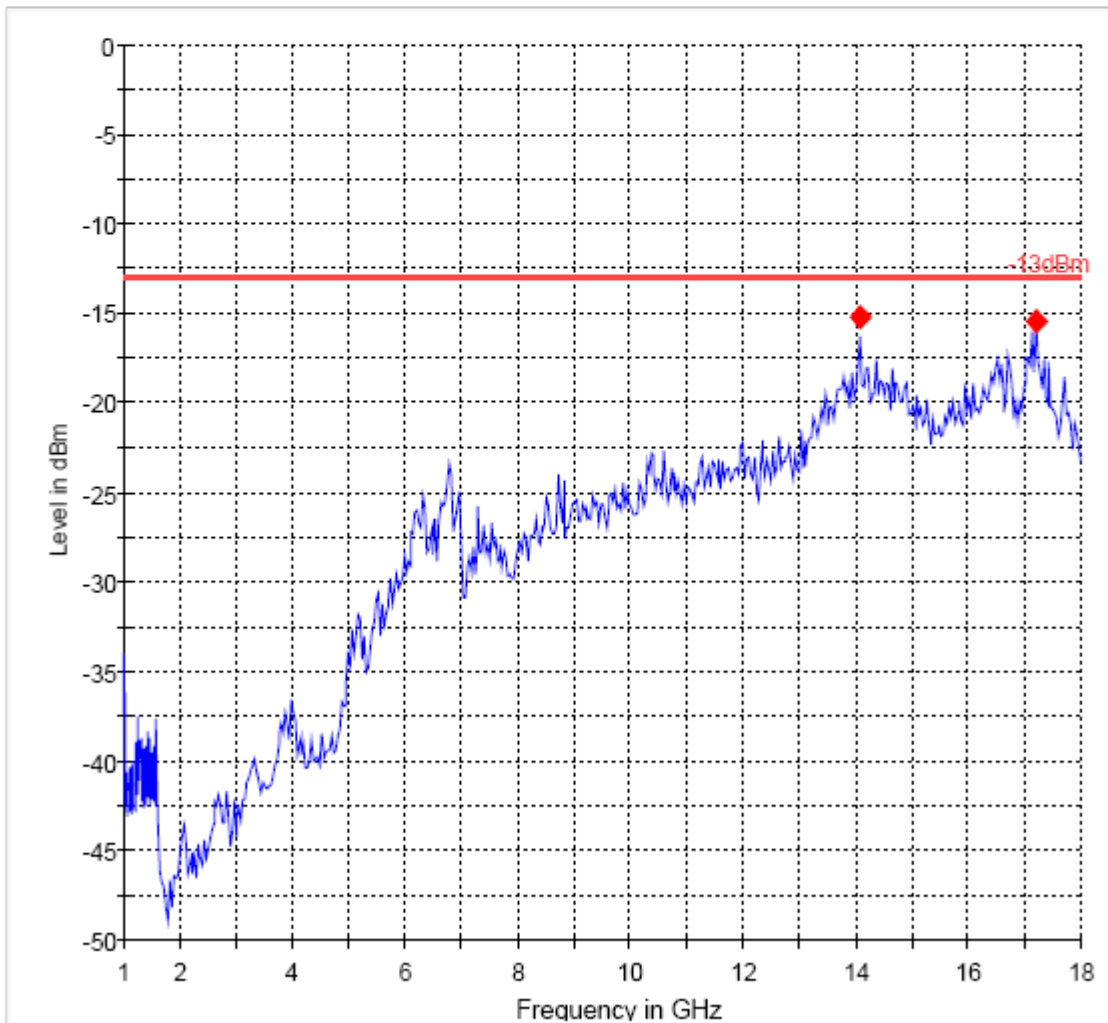

— -13dBm.LimitLine    
 — Preview Result 1    
 ◆ Final Result 1

**RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 251: 1GHz – 18GHz**

**Channel 251**


**Final Result 1**

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
16749.579158	-15.3	1000.000	1000.000	120.0	H	0.0	-46.6	2.3	-13.0

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
16749.579158	

FCC 22 1-18GHz

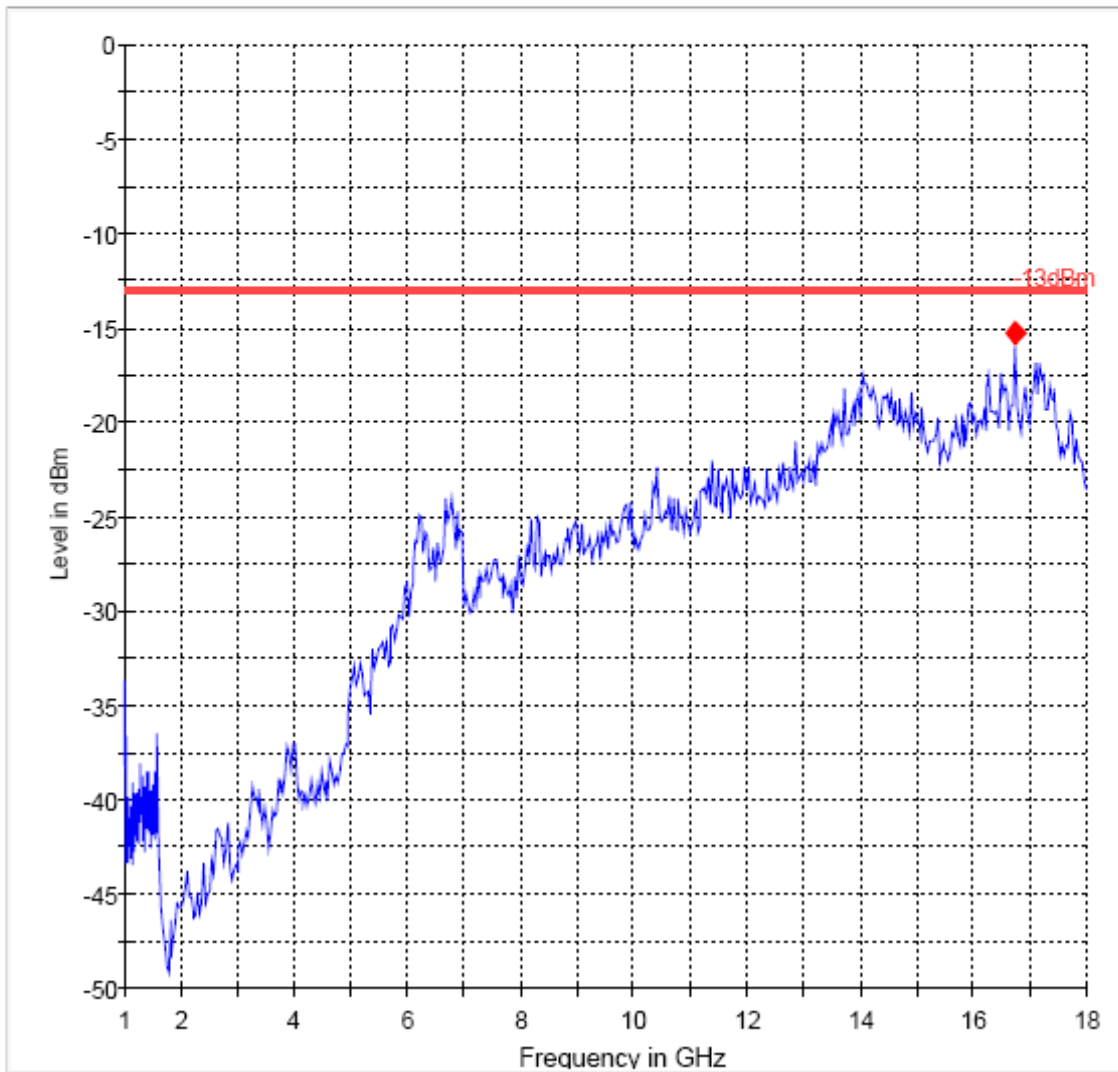

— -13dBm.LimitLine      — Preview Result 1      ◆ Final Result 1

**5.5.4.2 Test Results Transmitter Spurious Emission UMTS FDD5**

<b>Harmonics</b>	<b>Tx ch-4132 Freq. (MHz)</b>	<b>Level(dBm )</b>	<b>Tx ch-4183 Freq. (MHz)</b>	<b>Level(dBm )</b>	<b>Tx ch-4233 Freq. (MHz)</b>	<b>Level(dBm )</b>
<b>2</b>	<b>1652.8</b>	NF	<b>1673.2</b>	NF	<b>1693.2</b>	NF
<b>3</b>	<b>2479.2</b>	NF	<b>2509.8</b>	NF	<b>2539.8</b>	NF
<b>4</b>	<b>3305.6</b>	NF	<b>3346.4</b>	NF	<b>3386.4</b>	NF
<b>5</b>	<b>4132</b>	NF	<b>4183</b>	NF	<b>4233</b>	NF
<b>6</b>	<b>4958.4</b>	NF	<b>5019.6</b>	NF	<b>5079.6</b>	NF
<b>7</b>	<b>5784.8</b>	NF	<b>5856.2</b>	NF	<b>5926.2</b>	NF
<b>8</b>	<b>6611.2</b>	NF	<b>6692.8</b>	NF	<b>6772.8</b>	NF
<b>9</b>	<b>7437.6</b>	NF	<b>7529.4</b>	NF	<b>7619.4</b>	NF
<b>10</b>	<b>8264</b>	NF	<b>8366</b>	NF	<b>8466</b>	NF





**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) TX: 30MHz - 1GHz**

**Spurious emission limit -13dBm**

**Antenna: vertical**

**Note:**

**1. The peak above the limit line is the carrier freq.**

**2. This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303

Customer:: Apple

Test Mode: FDD V

ANT Orientation: V

EUT Orientation: V


Test Engineer: Chris

Voltage: FCC AC Adapter

Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

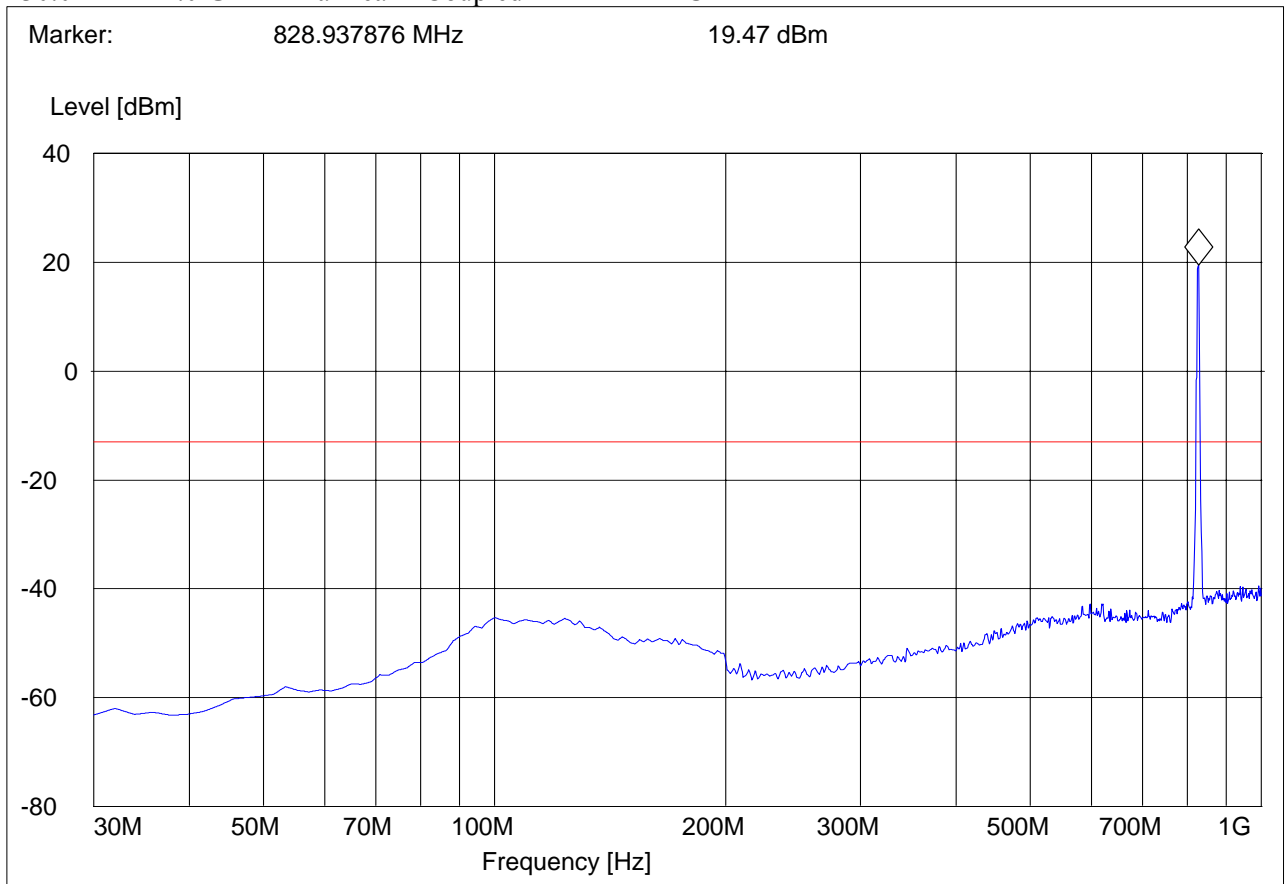



**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) TX: 30MHz - 1GHz**

**Spurious emission limit -13dBm**

**Antenna: Horizontal**


**Note:**

1. The peak above the limit line is the carrier freq.
2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_H"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

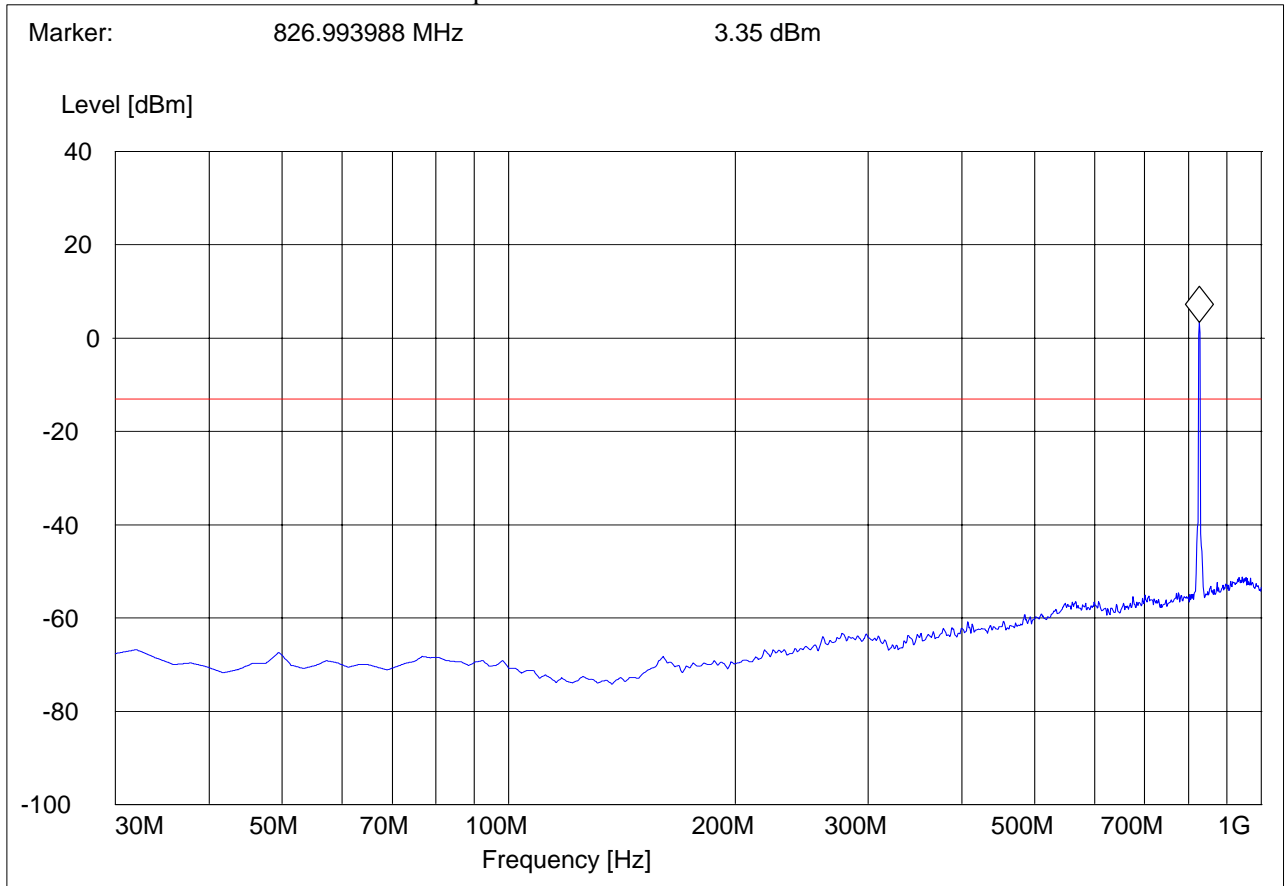




**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4132: 1GHz - 1.58GHz**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V ch 4132  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1-1.58G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

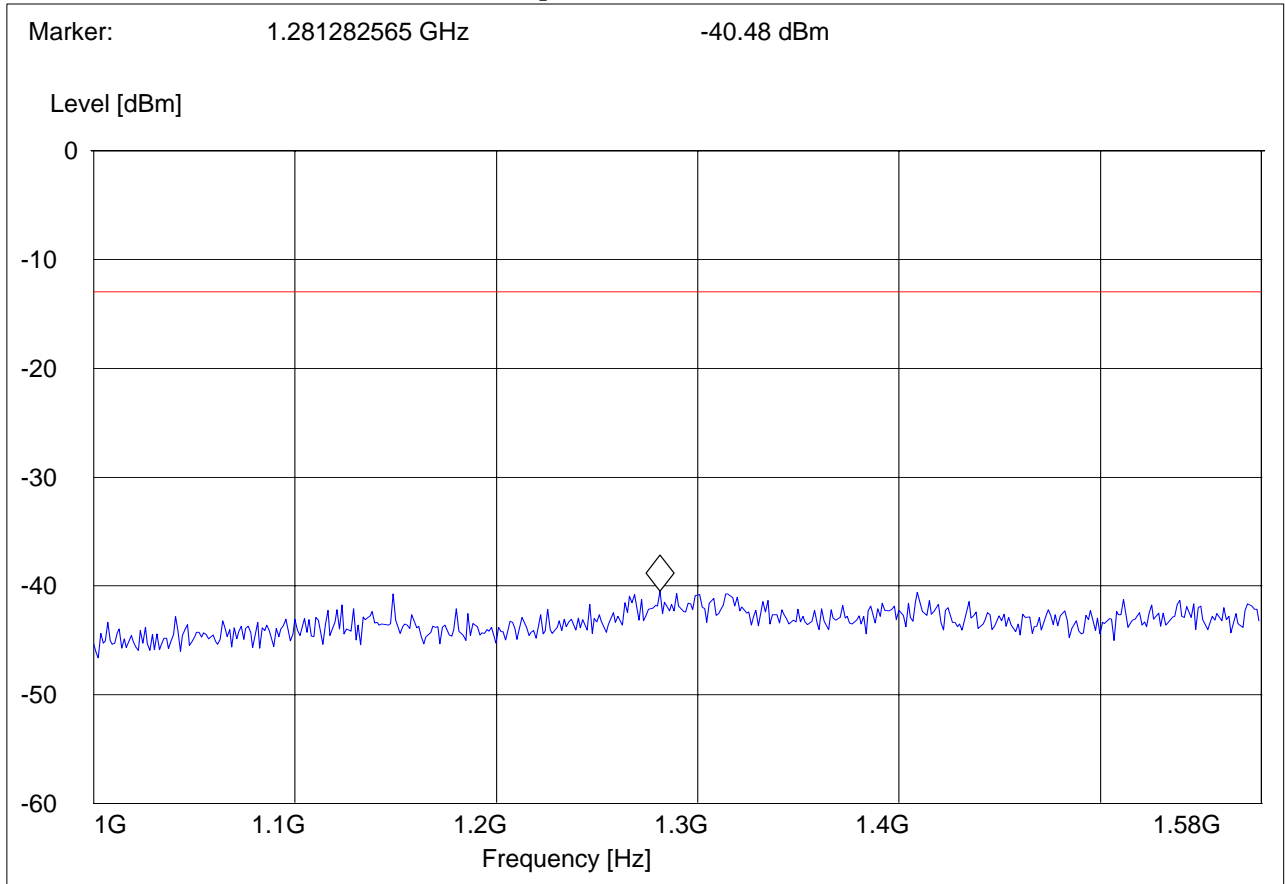




**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4132: 1.58GHz – 9GHz**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V CH 4132  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1.58-9G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.174749499 GHz -42.96 dBm

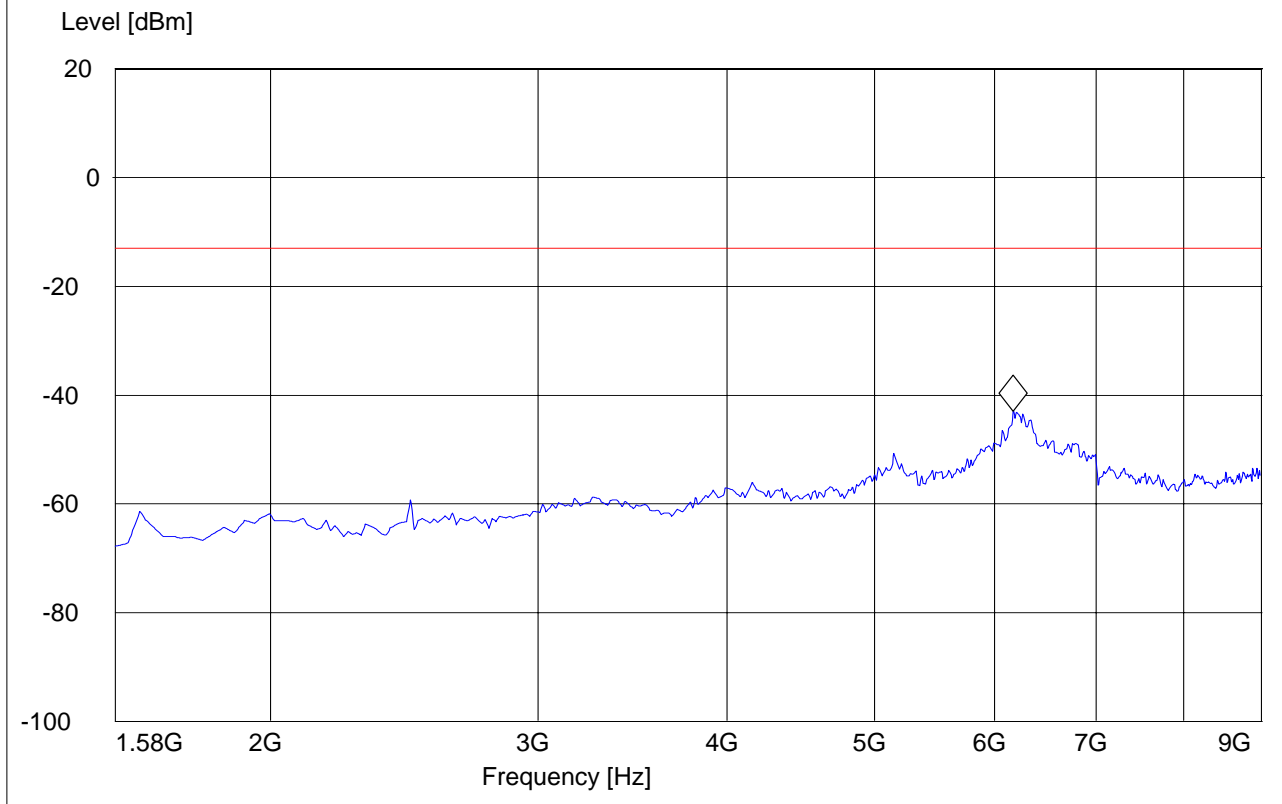




**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4183: 1GHz - 1.58GHz**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1-1.58G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

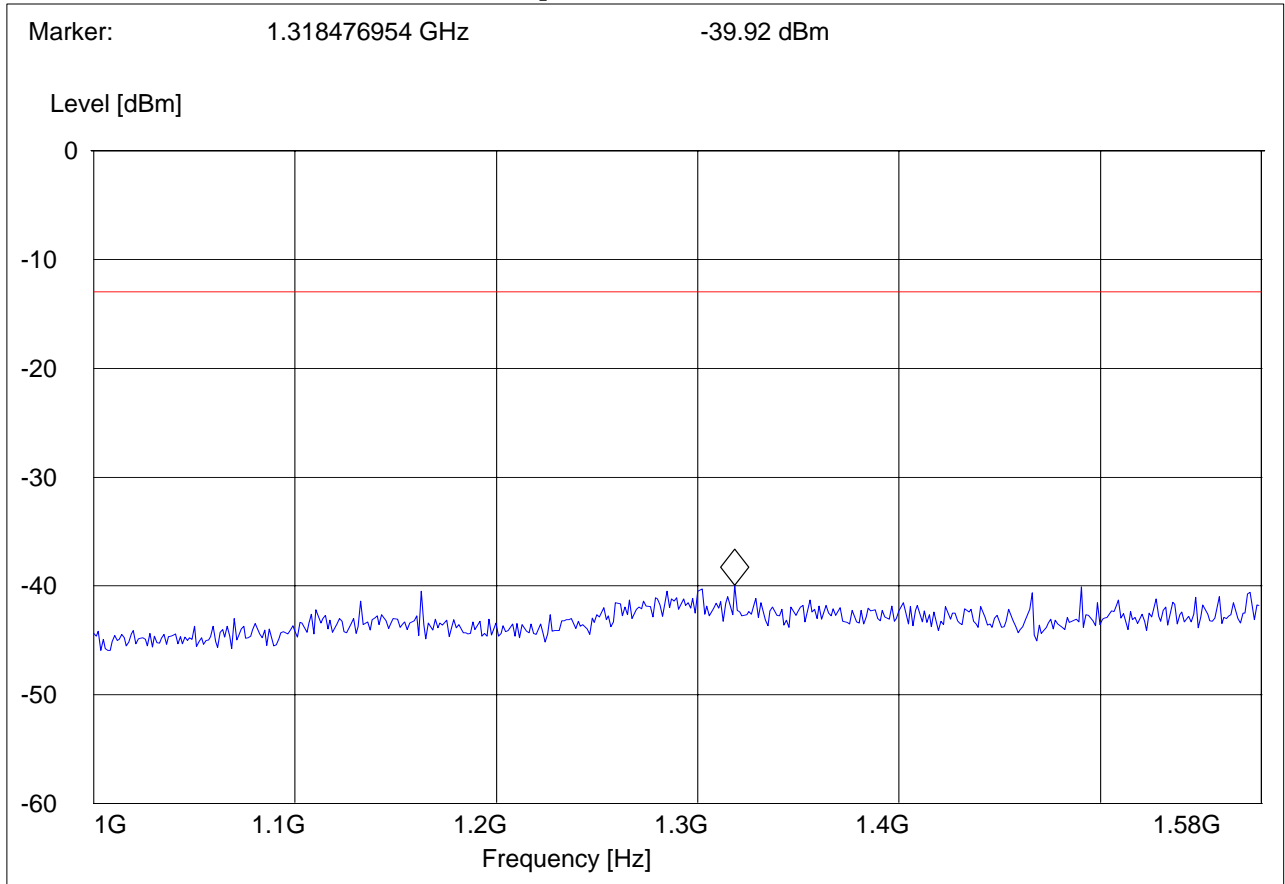




**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4183: 1.58GHz – 9GHz**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V channel 4183  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1.58-9G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

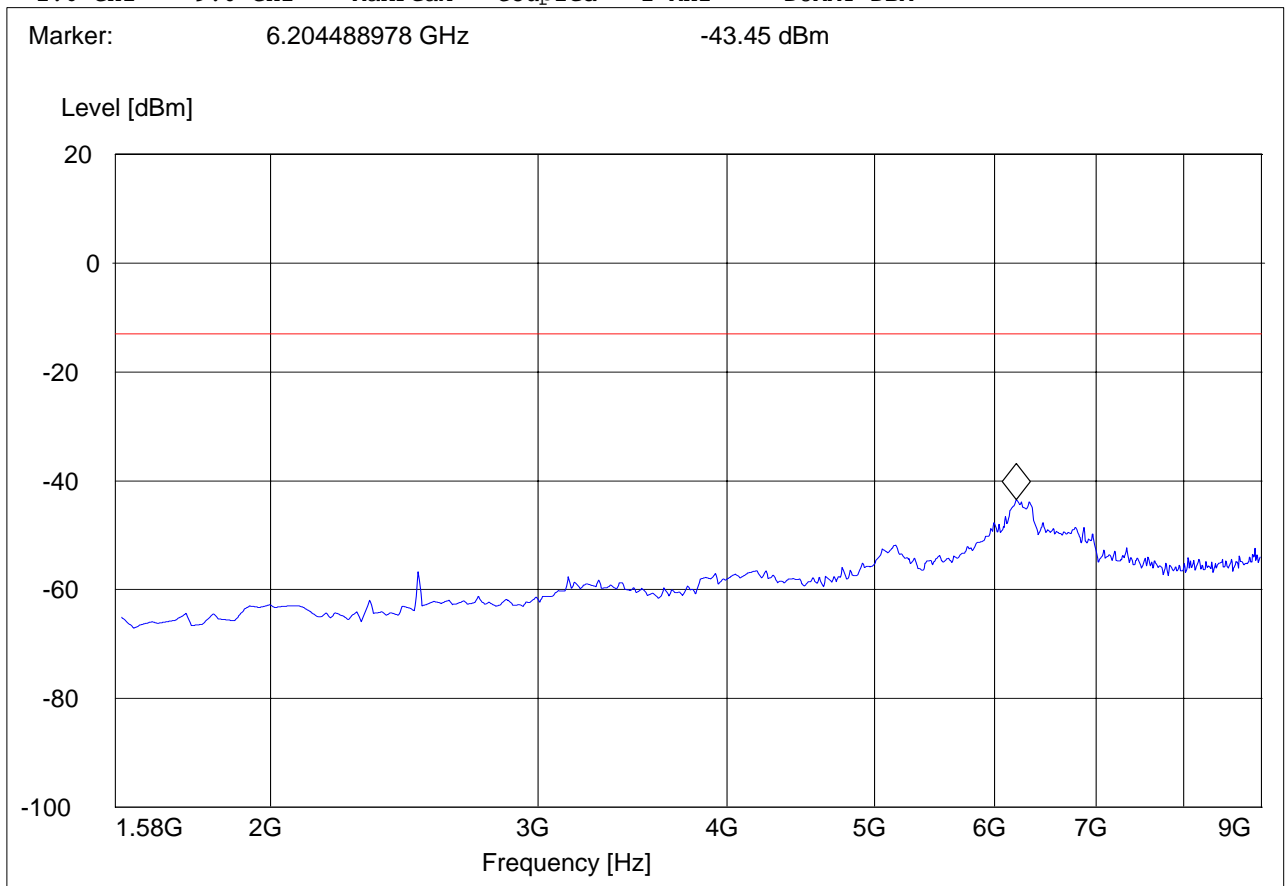




**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4233: 1GHz - 1.58GHz**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V CHANNEL 4233  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1-1.58G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

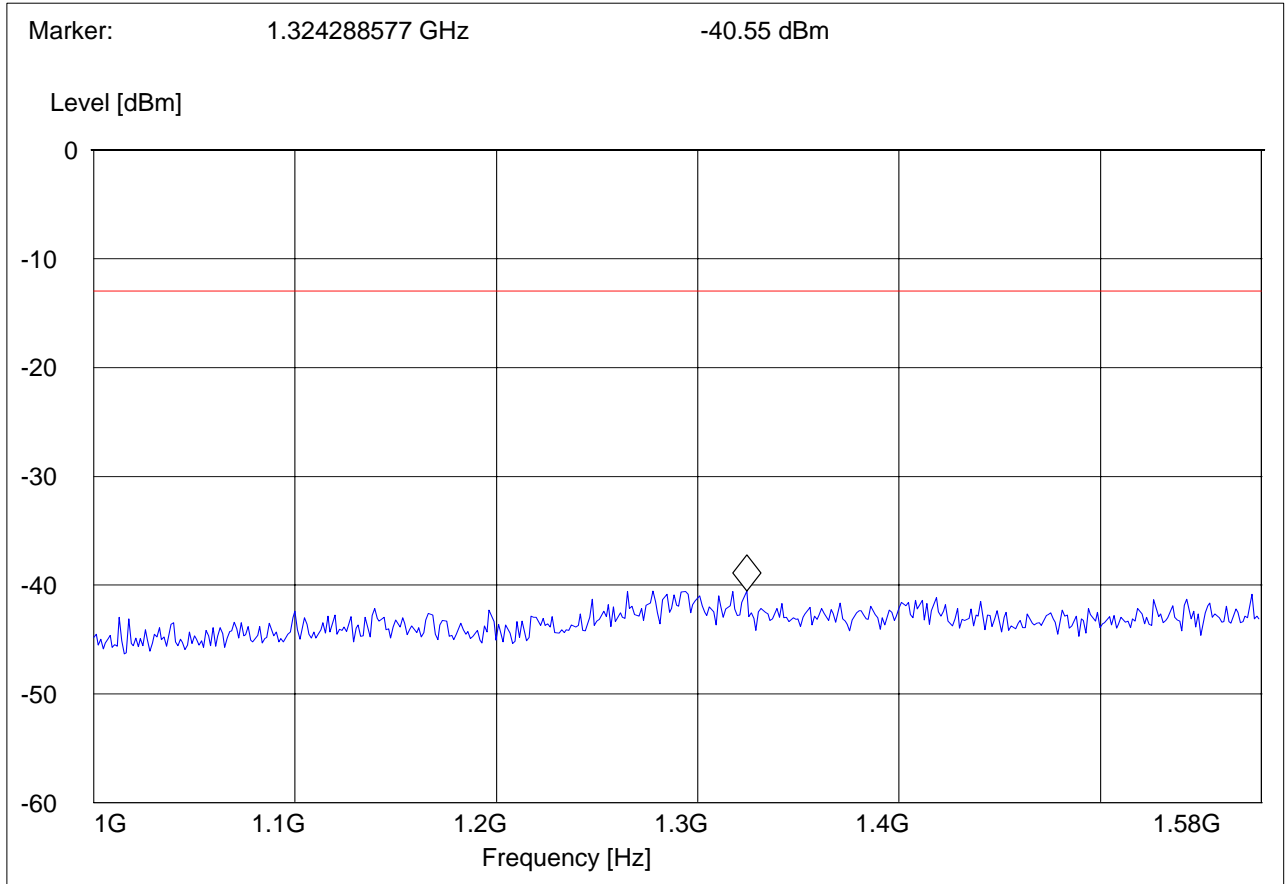




**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4233: 1.58GHz -9GHz**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V CHANNEL 4233  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1.58-9G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

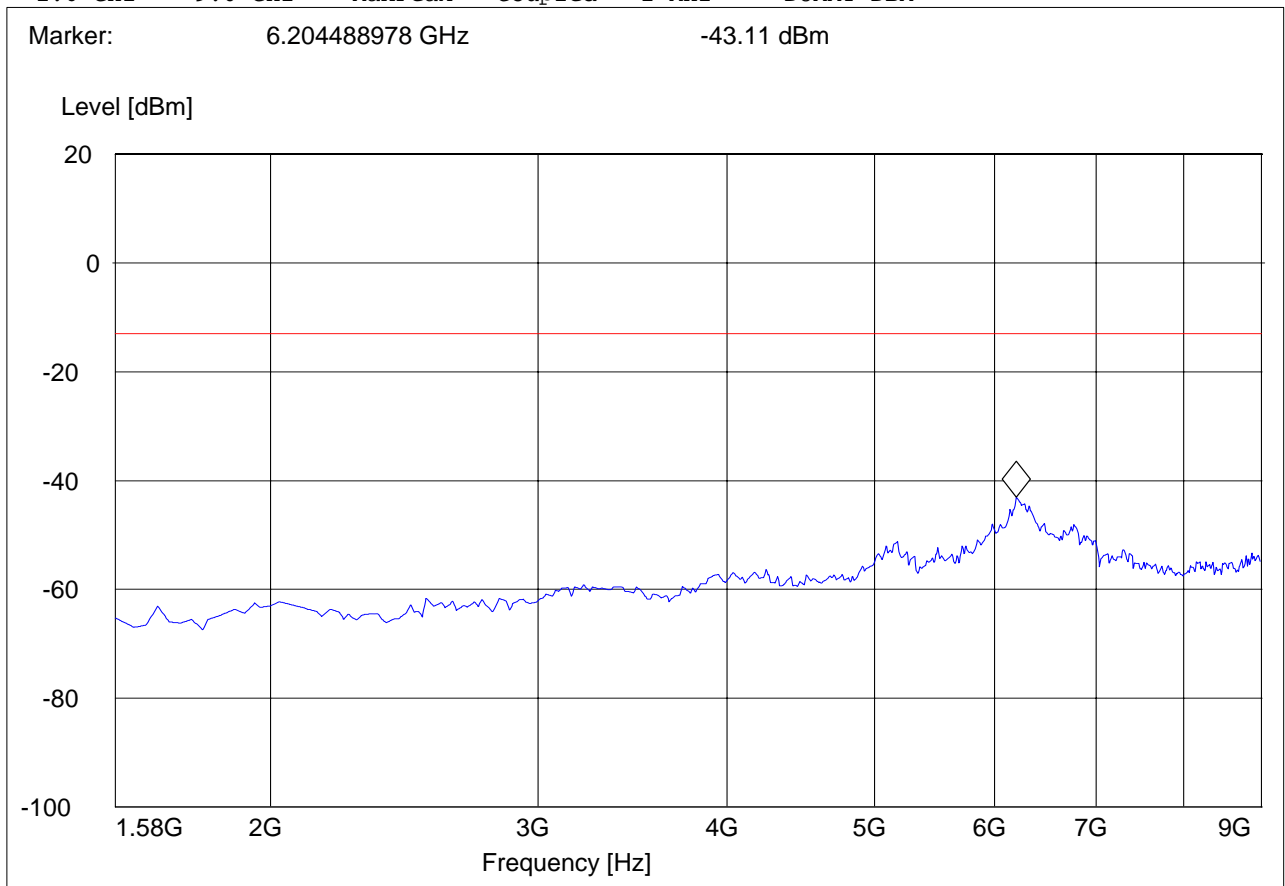



**5.5.4.3 Test Results Transmitter Spurious Emission PCS-1900:**

<b>Harmonic</b>	<b>Tx ch-512 Freq.(MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-661 Freq. (MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-810 Freq. (MHz)</b>	<b>Level (dBm)</b>
<b>2</b>	<b>3700.4</b>	NF	<b>3760</b>	NF	<b>3819.6</b>	NF
<b>3</b>	<b>5550.6</b>	NF	<b>5640</b>	NF	<b>5729.4</b>	NF
<b>4</b>	<b>7400.8</b>	NF	<b>7520</b>	NF	<b>7639.2</b>	NF
<b>5</b>	<b>9251</b>	NF	<b>9400</b>	NF	<b>9549</b>	NF
<b>6</b>	<b>11101.2</b>	NF	<b>11280</b>	NF	<b>11458.8</b>	NF
<b>7</b>	<b>12951.4</b>	NF	<b>13160</b>	NF	<b>13368.6</b>	NF
<b>8</b>	<b>14801.6</b>	NF	<b>15040</b>	NF	<b>15278.4</b>	NF
<b>9</b>	<b>16651.8</b>	NF	<b>16920</b>	NF	<b>17188.2</b>	NF
<b>10</b>	<b>18502</b>	NF	<b>18800</b>	NF	<b>19098</b>	NF
NF = NOISE FLOOR						



**RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 30MHz - 1GHz**

**Antenna: Vertical**


**Note:**

1. This plot is valid for low, mid & high channels (worst-case plot)

EUT: A1303  
 Customer:: Apple  
 Test Mode: GSM 1900 CH 661  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Sam  
 Voltage: FCC AC  
 Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

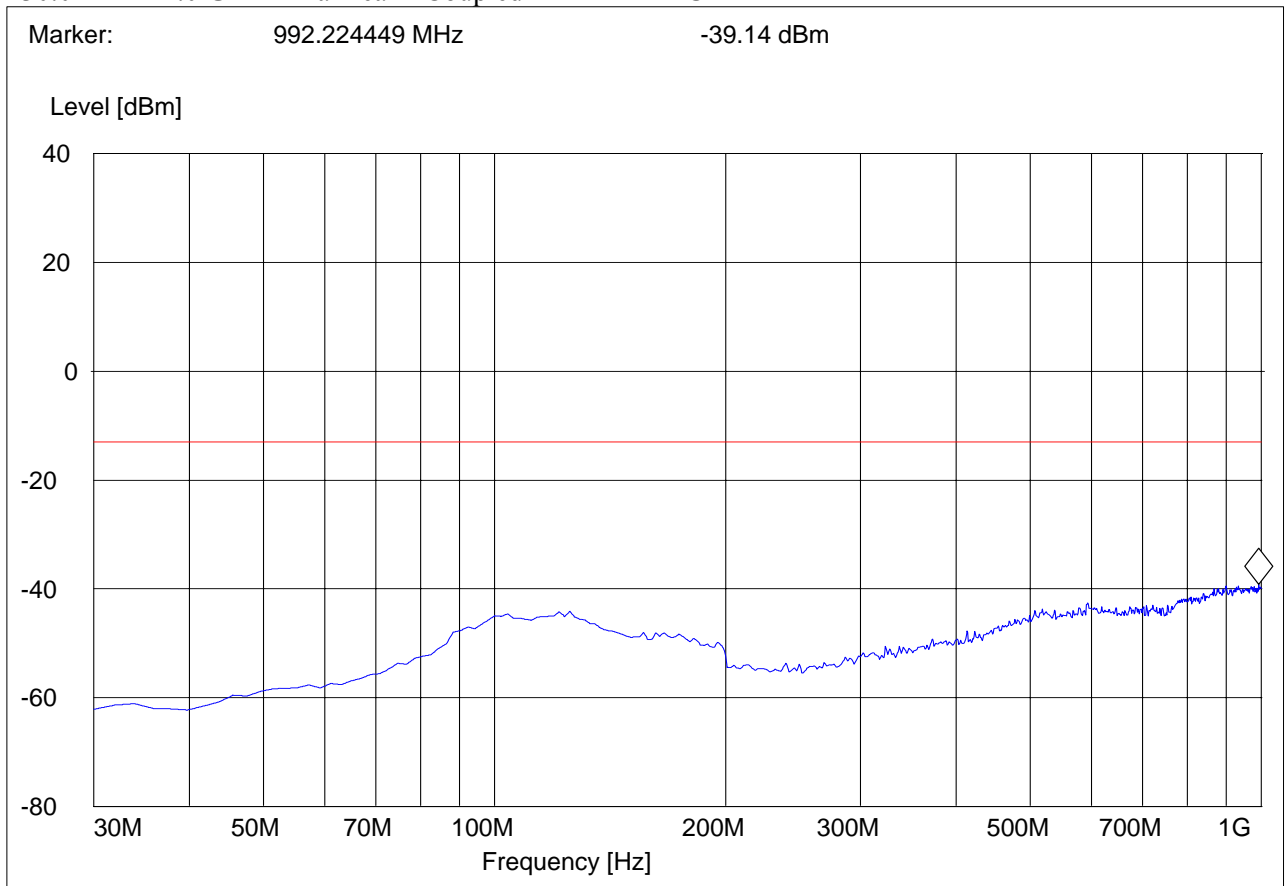



**RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 30MHz - 1GHz**

**Antenna: Horizontal**


**Note:**

1. This plot is valid for low, mid & high channels (worst-case plot)

EUT: A1303  
 Customer:: Apple  
 Test Mode: GSM 1900 CH 661  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Sam  
 Voltage: FCC AC  
 Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_H"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

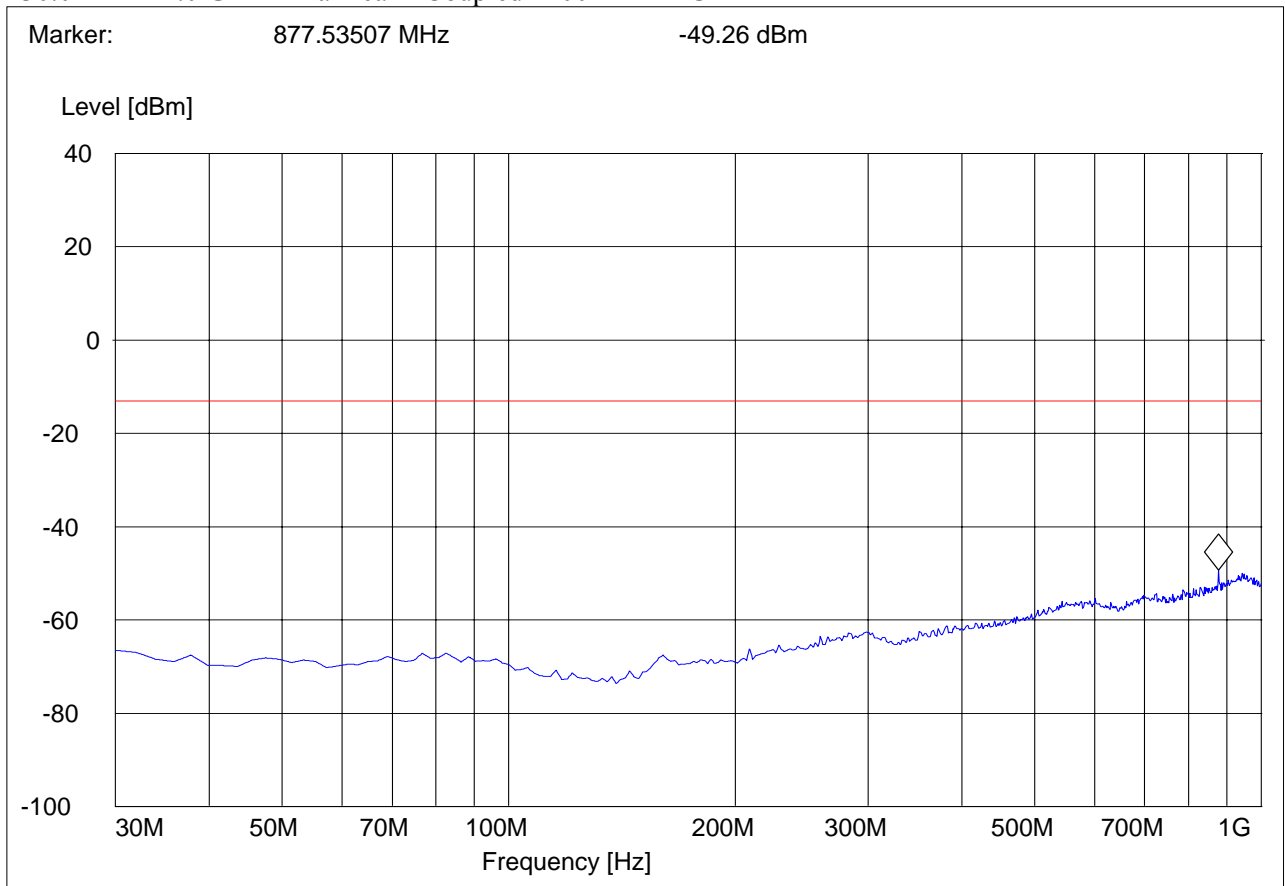

**RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 512: 1GHz – 3GHz  
Channel 512**


**Final Result 1**

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
1849.699399	12.3	1000.000	1000.000	120.0	H	223.0	-71.0	-25.3	-13.0
17218.436874	-15.6	1000.000	1000.000	200.0	H	189.0	-48.3	2.6	-13.0

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
1849.699399	
17218.436874	

FCC 24 1-18GHz

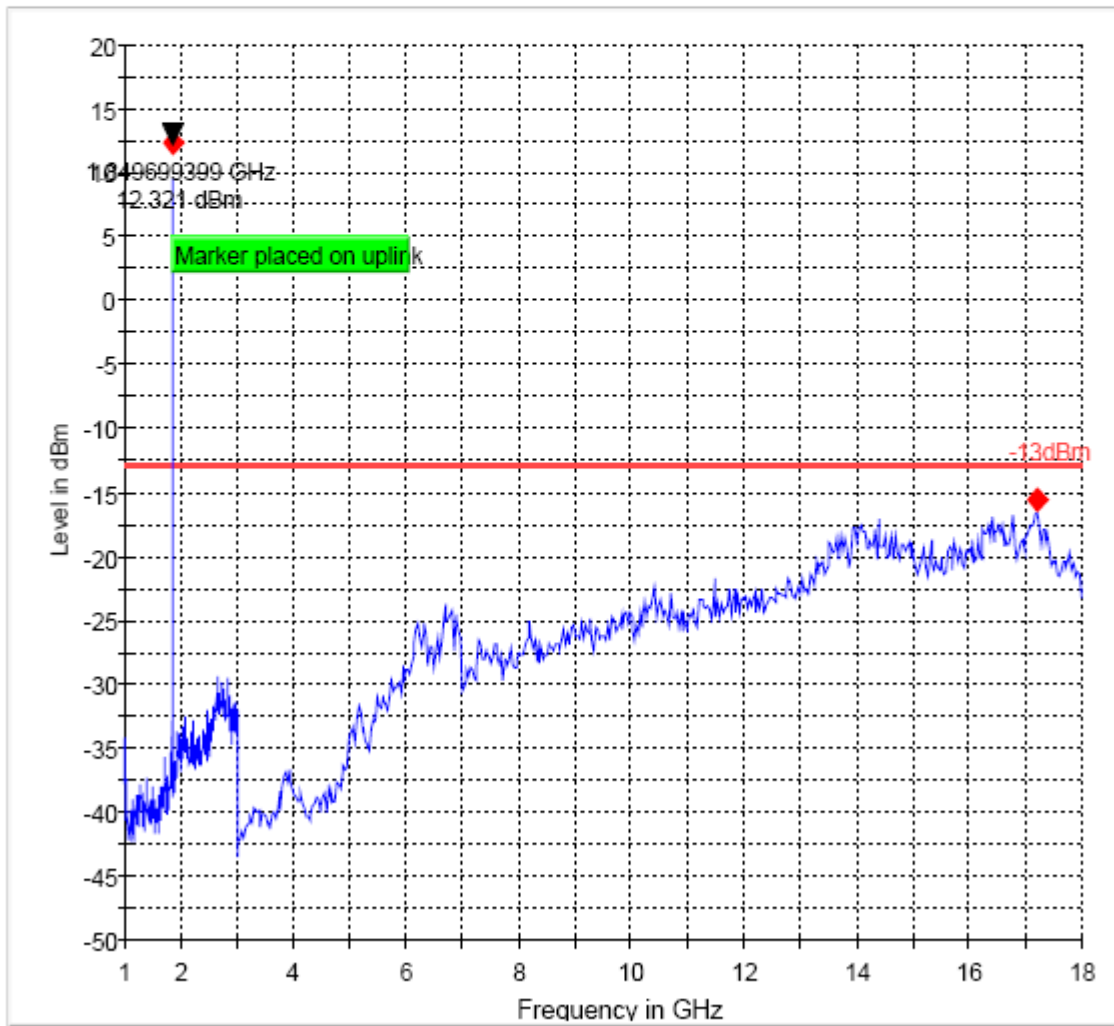

— -13dBm.LimitLine     
 — Preview Result 1     
 ◆ Final Result 1

**RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 661: 1GHz – 18GHz**  
**Channel 661**


**Final Result 1**

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
17128.256513	-15.3	1000.000	1000.000	191.0	H	305.0	-49.3	2.3	-13.0

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
17128.256513	

FCC 24 1-18GHz

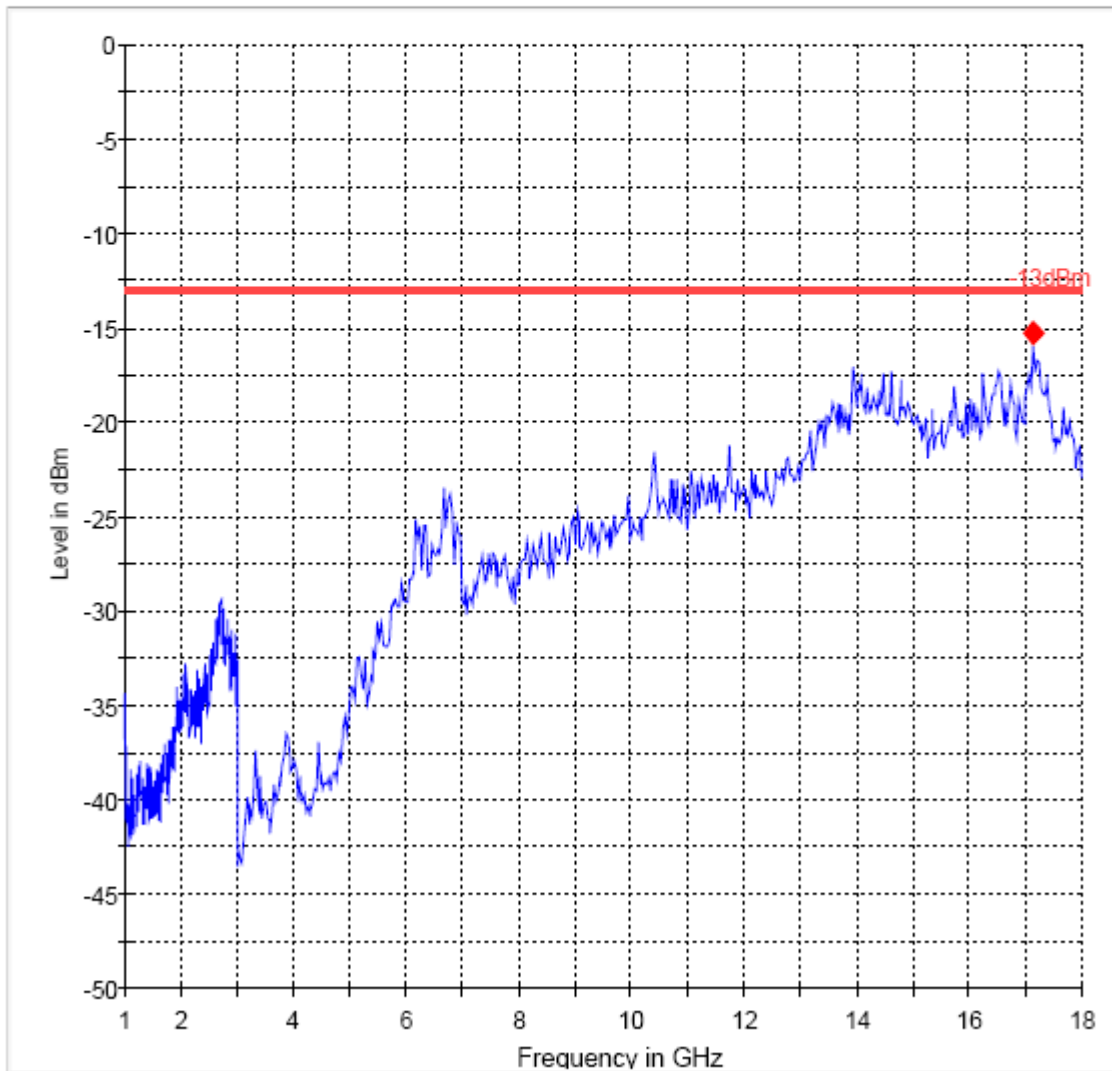

— -13dBm.LimitLine      — Preview Result 1      ◆ Final Result 1

**RADIATED SPURIOUS EMISSIONS (PCS 1900) Tx CHANNEL 810: 1GHz – 18GHz**  
**Channel 810**


**Final Result 1**

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
1909.819639	17.9	1000.000	1000.000	120.0	H	203.0	-71.0	-30.9	-13.0
14092.184369	-14.8	1000.000	1000.000	120.0	H	201.0	-49.0	1.8	-13.0

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
1909.819639	
14092.184369	

FCC 24 1-18GHz

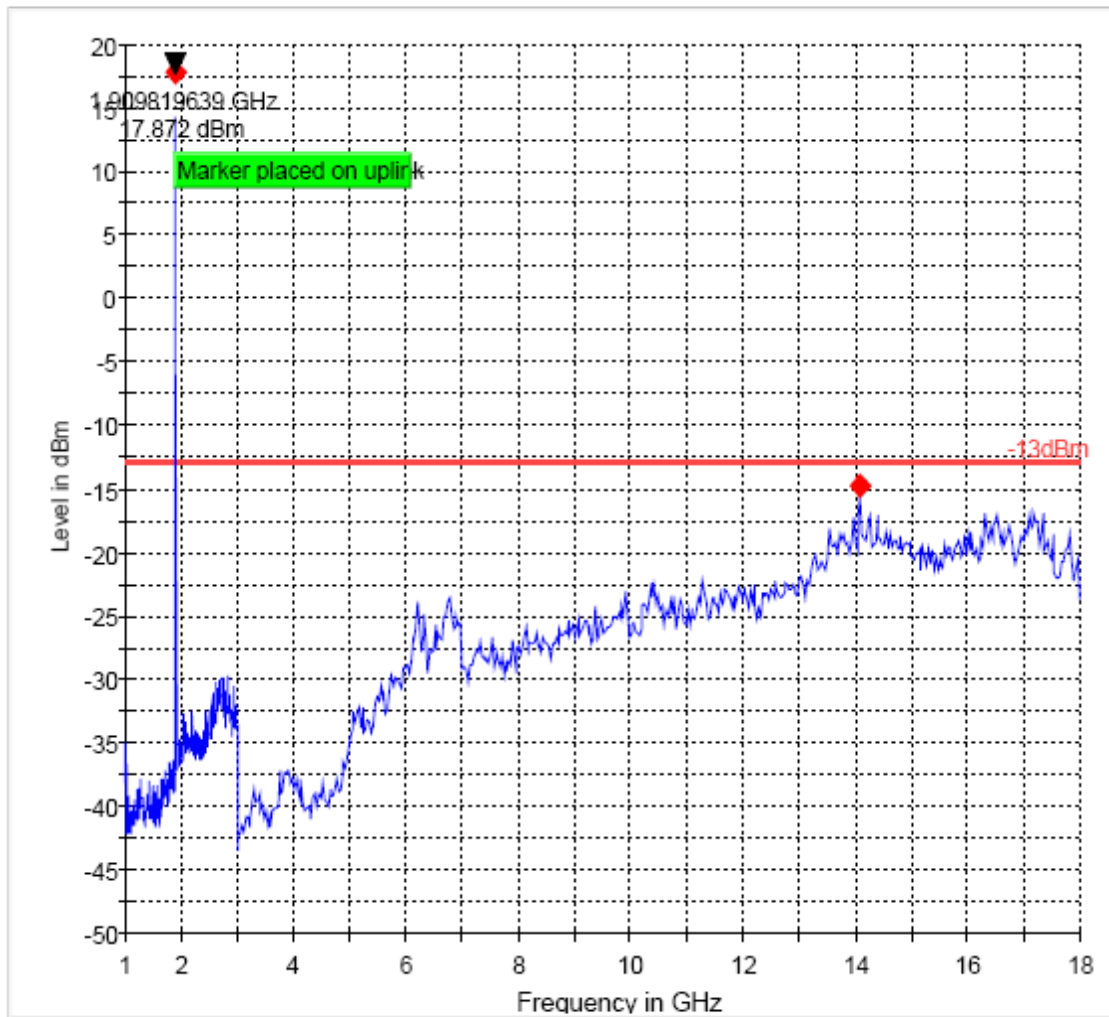

— -13dBm.LimitLine      — Preview Result 1      ◆ Final Result 1

**5.5.4.4 Test Results Transmitter Spurious Emission UMTS FDD2:**

Harmonics	Tx ch-9262 Freq. (MHz)	Level (dBm)	Tx ch-9400 Freq. (MHz)	Level (dBm)	Tx ch-9538 Freq. (MHz)	Level (dBm)
<b>2</b>	<b>3704.8</b>	NF	<b>3760</b>	NF	<b>3815.2</b>	NF
<b>3</b>	<b>5557.2</b>	NF	<b>5640</b>	NF	<b>5722.8</b>	NF
<b>4</b>	<b>7409.6</b>	NF	<b>7520</b>	NF	<b>7630.4</b>	NF
<b>5</b>	<b>9262</b>	NF	<b>9400</b>	NF	<b>9538</b>	NF
<b>6</b>	<b>11114.4</b>	NF	<b>11280</b>	NF	<b>11445.6</b>	NF
<b>7</b>	<b>12966.8</b>	NF	<b>13160</b>	NF	<b>13353.2</b>	NF
<b>8</b>	<b>14819.2</b>	NF	<b>15040</b>	NF	<b>15260.8</b>	NF
<b>9</b>	<b>16671.6</b>	NF	<b>16920</b>	NF	<b>17168.4</b>	NF
<b>10</b>	<b>18524</b>	NF	<b>18800</b>	NF	<b>19076</b>	NF



**RADIATED SPURIOUS EMISSIONS (UMTS FDD2) TX: 30MHz - 1GHz**

**Antenna: Vertical**


**Note:**

**1. This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II CH 9262  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Sam  
 Voltage: FCC AC  
 Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

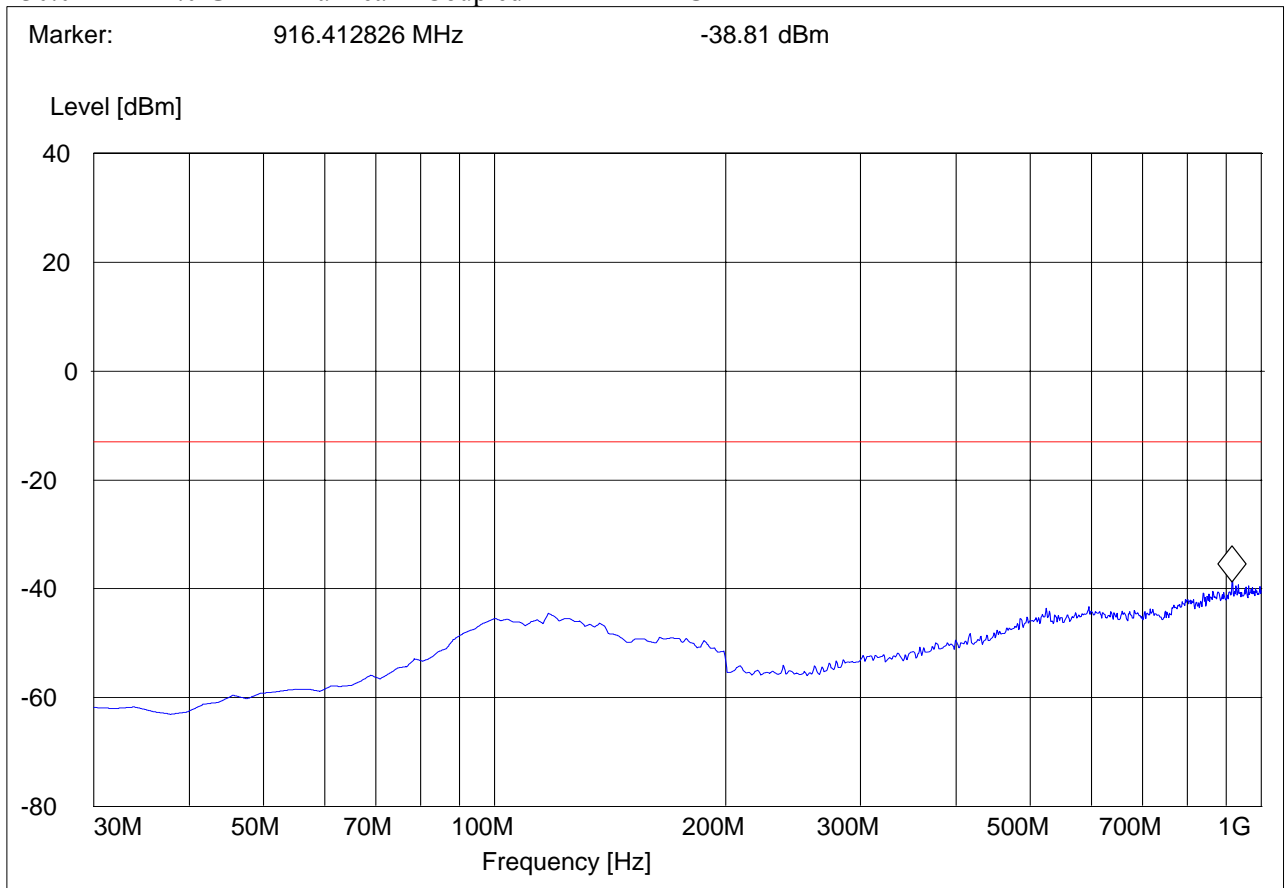





**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) TX: 30MHz - 1GHz**

**Antenna: Horizontal**

**Note:**

**1. This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303

Customer:: Apple

Test Mode: FDD II CH 9262

ANT Orientation: H

EUT Orientation: V


Test Engineer: Sam

Voltage: FCC AC

Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_H"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

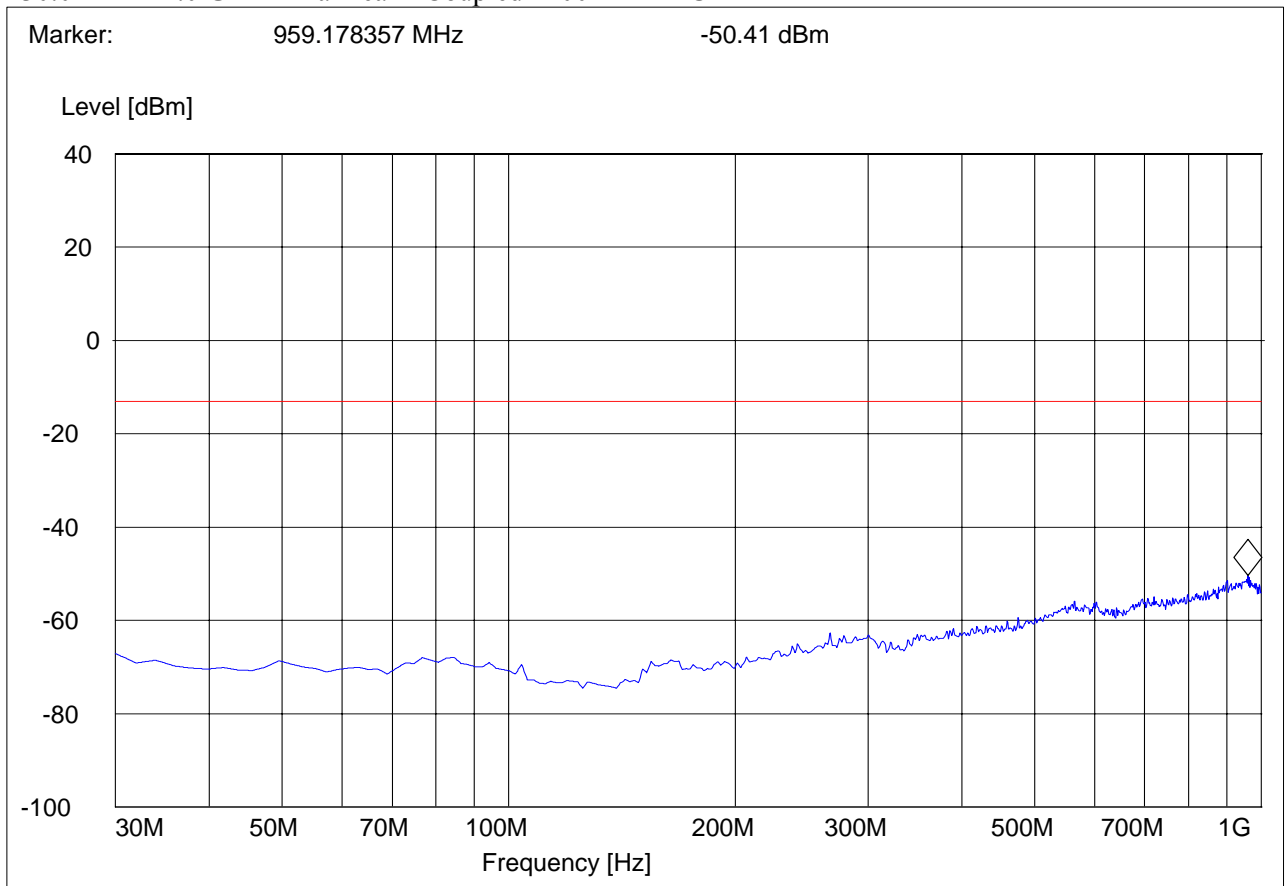


**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9262: 1GHz – 3GHz**

**Note: The peak above the limit line is the carrier freq. at ch-9262.**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

***SWEEP TABLE: "FCC 24Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

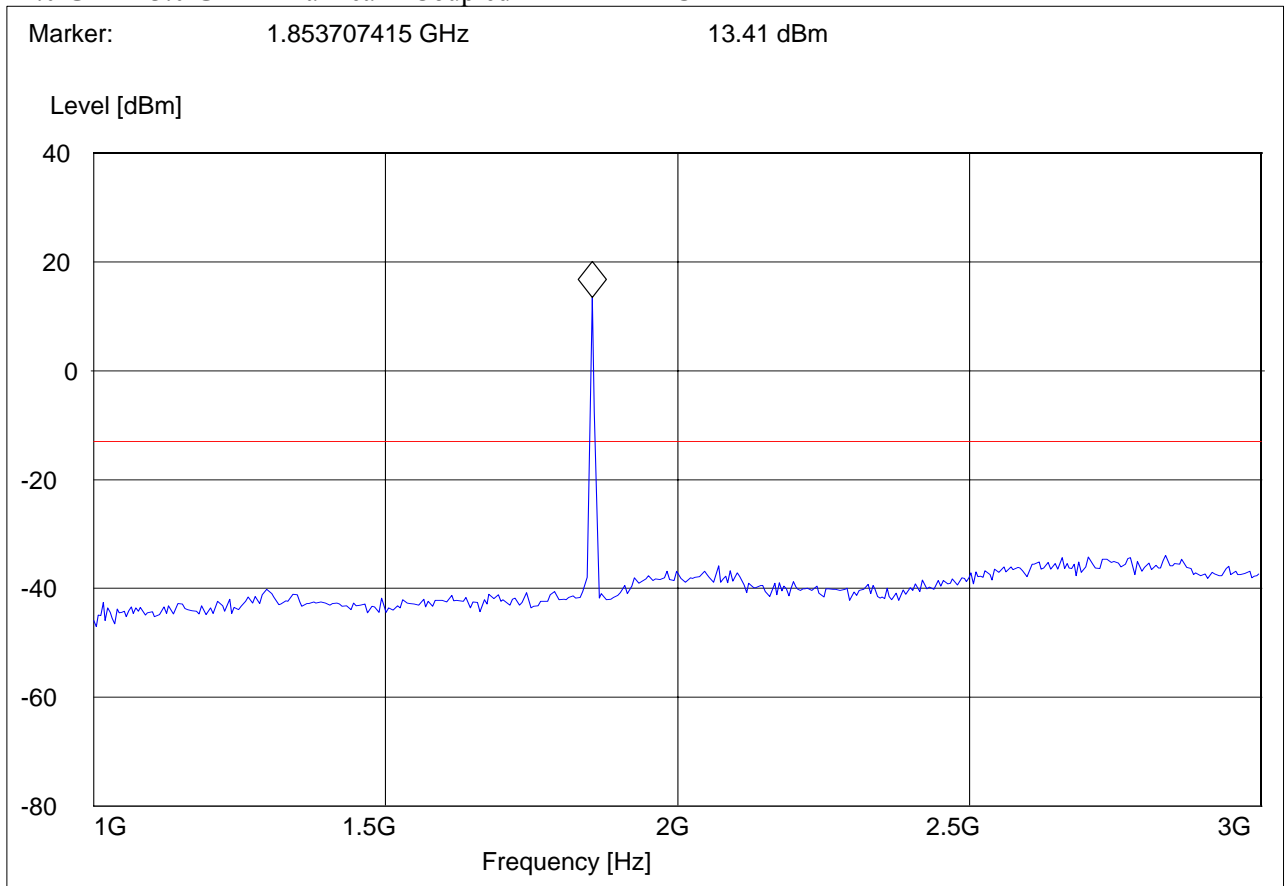




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9262: 3GHz – 18GHz**

EUT: A1303  
 Customer: Apple  
 Test Mode: FDD II  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 3-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

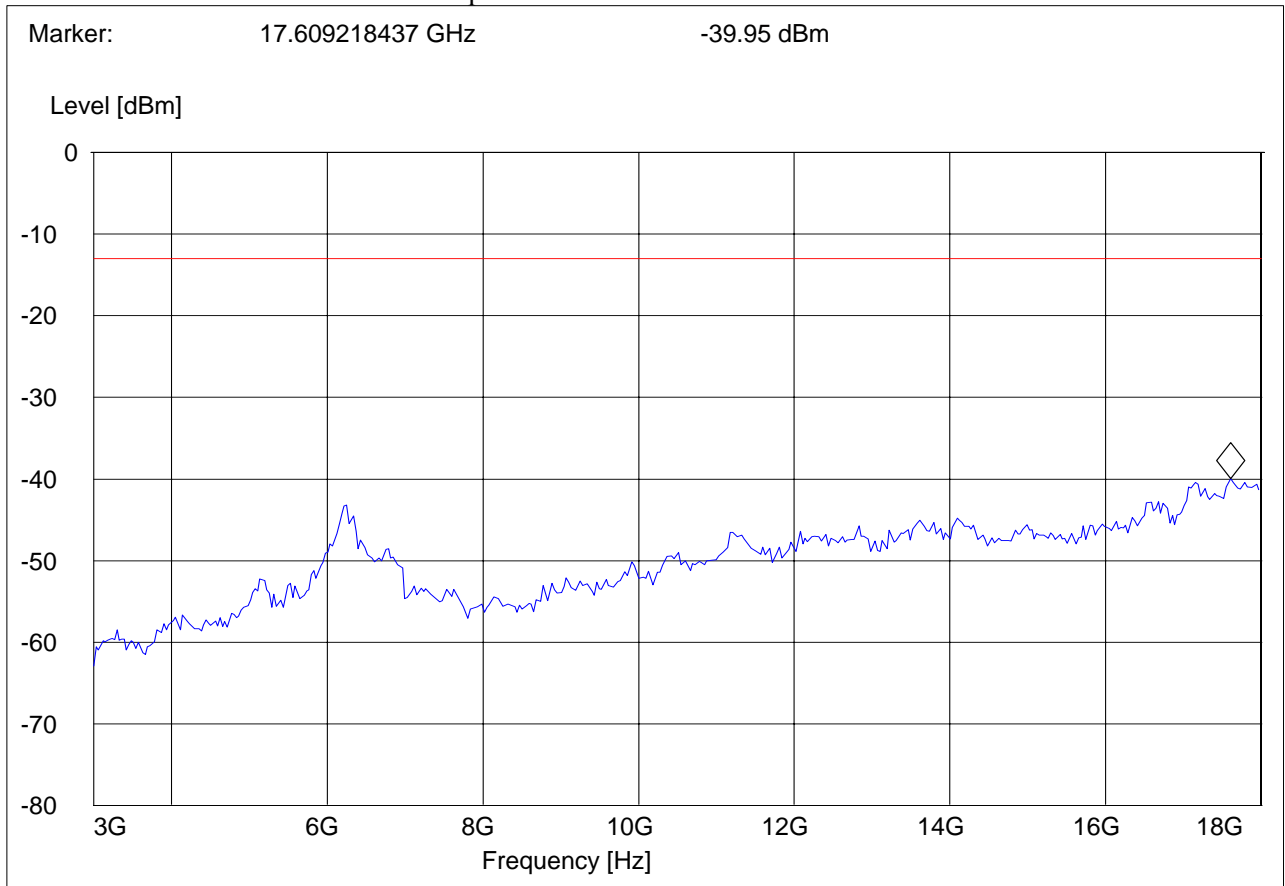




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9400: 1GHz – 3GHz**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 1-3G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

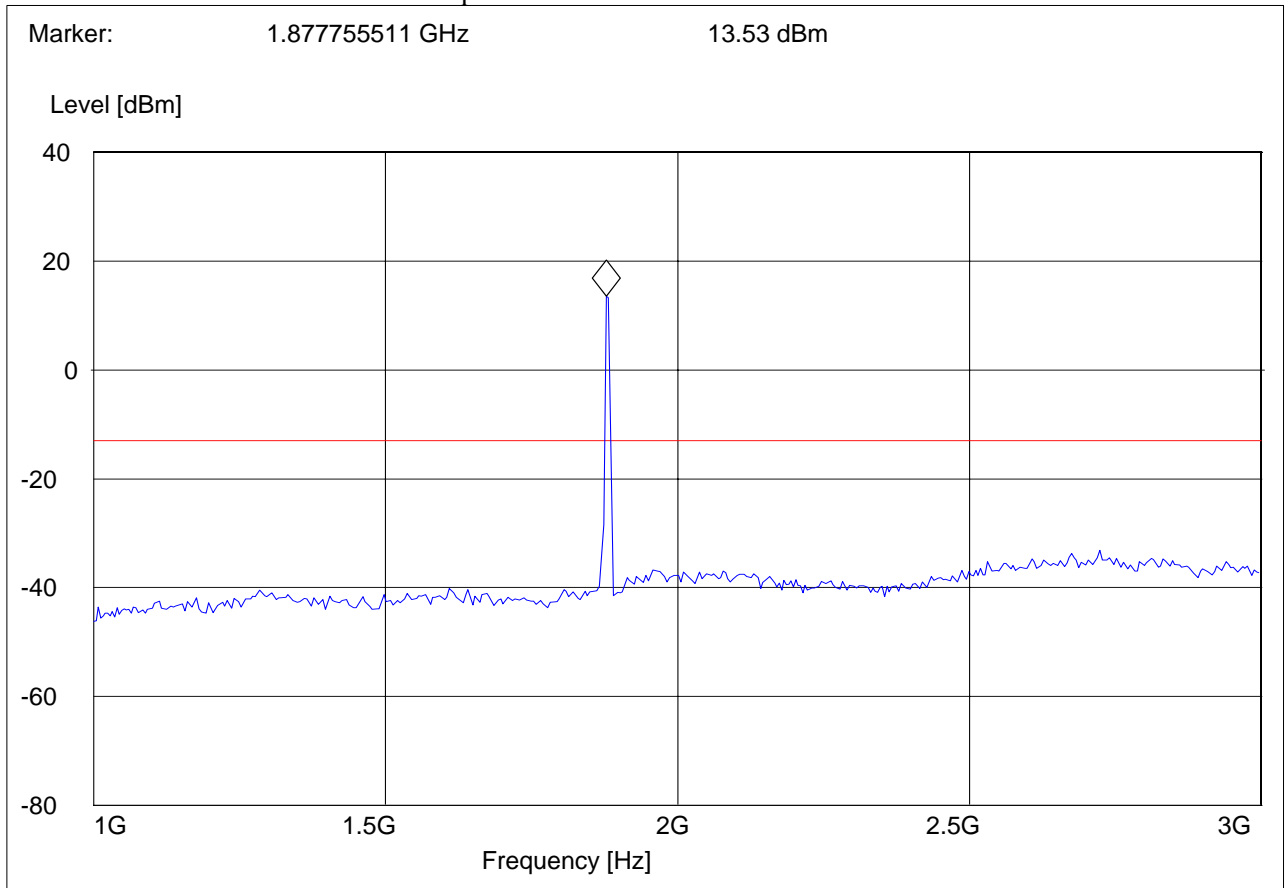




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL9400: 3GHz – 18GHz**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

***SWEEP TABLE: "FCC 24Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

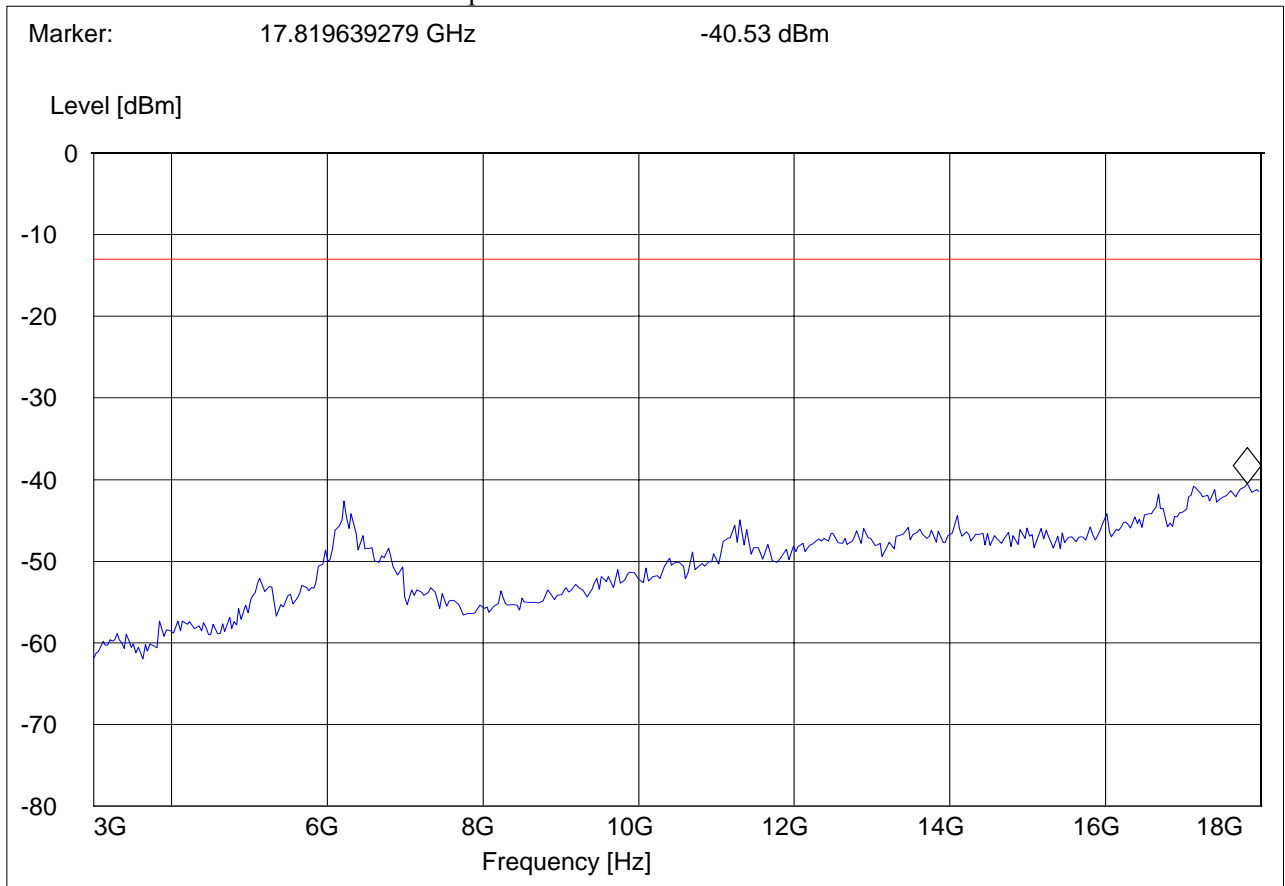




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9538: 1GHz – 3GHz**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

***SWEEP TABLE: "FCC 24Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

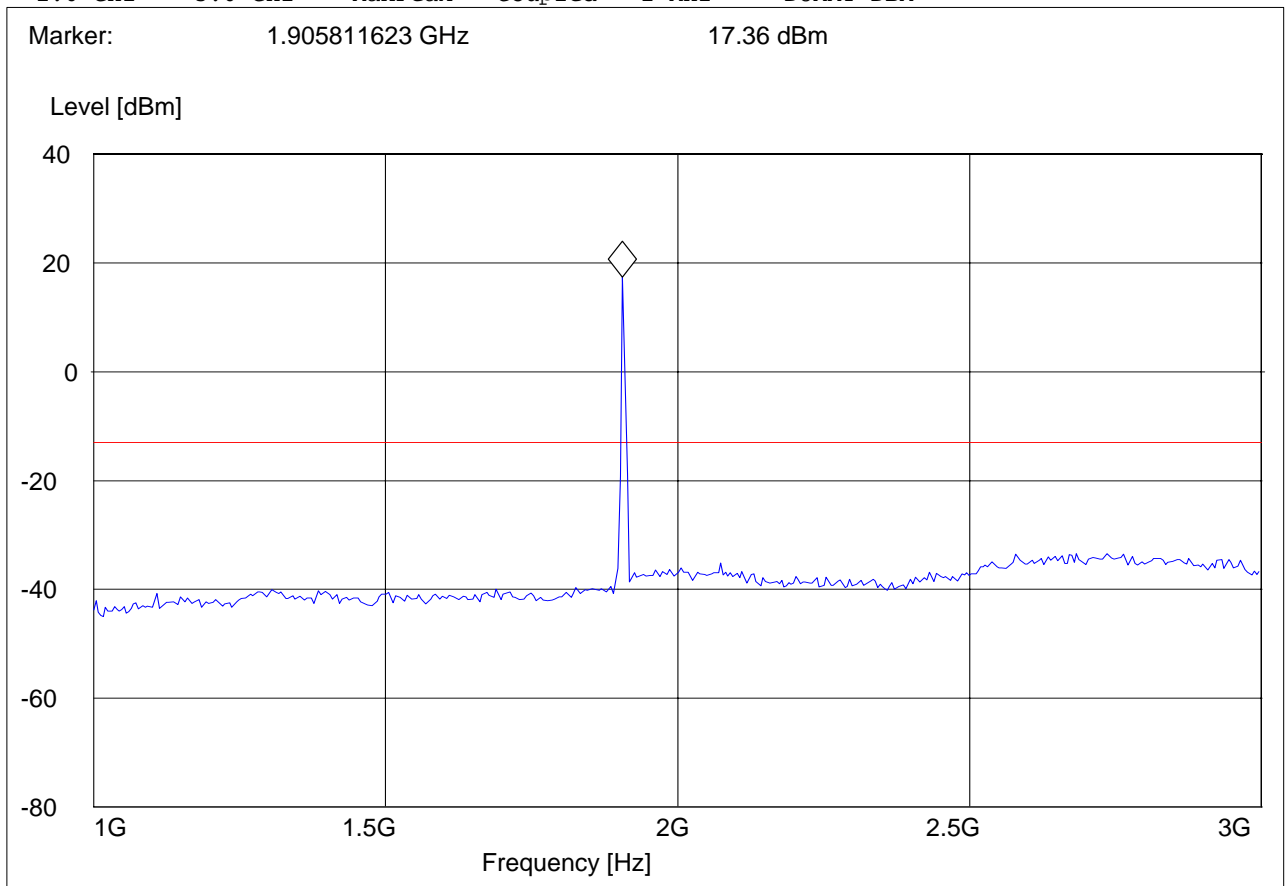




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9538: 3GHz – 18GHz**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 3-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

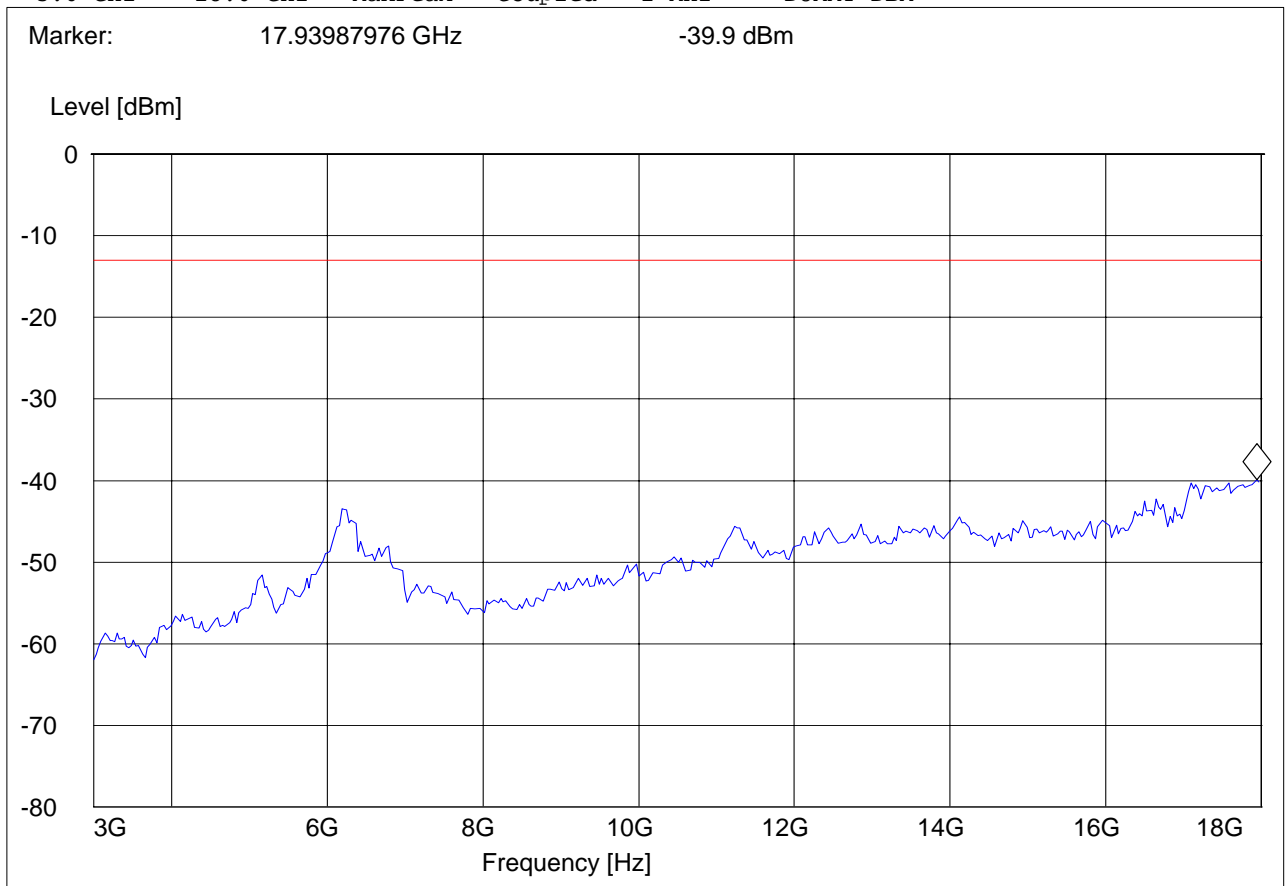



**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) 18GHz – 19.1GHz**


**Note:**

**1. This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24spuri 18-19.1G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	19.1 GHz	Average	Coupled	1 MHz	DUMMY-DBM

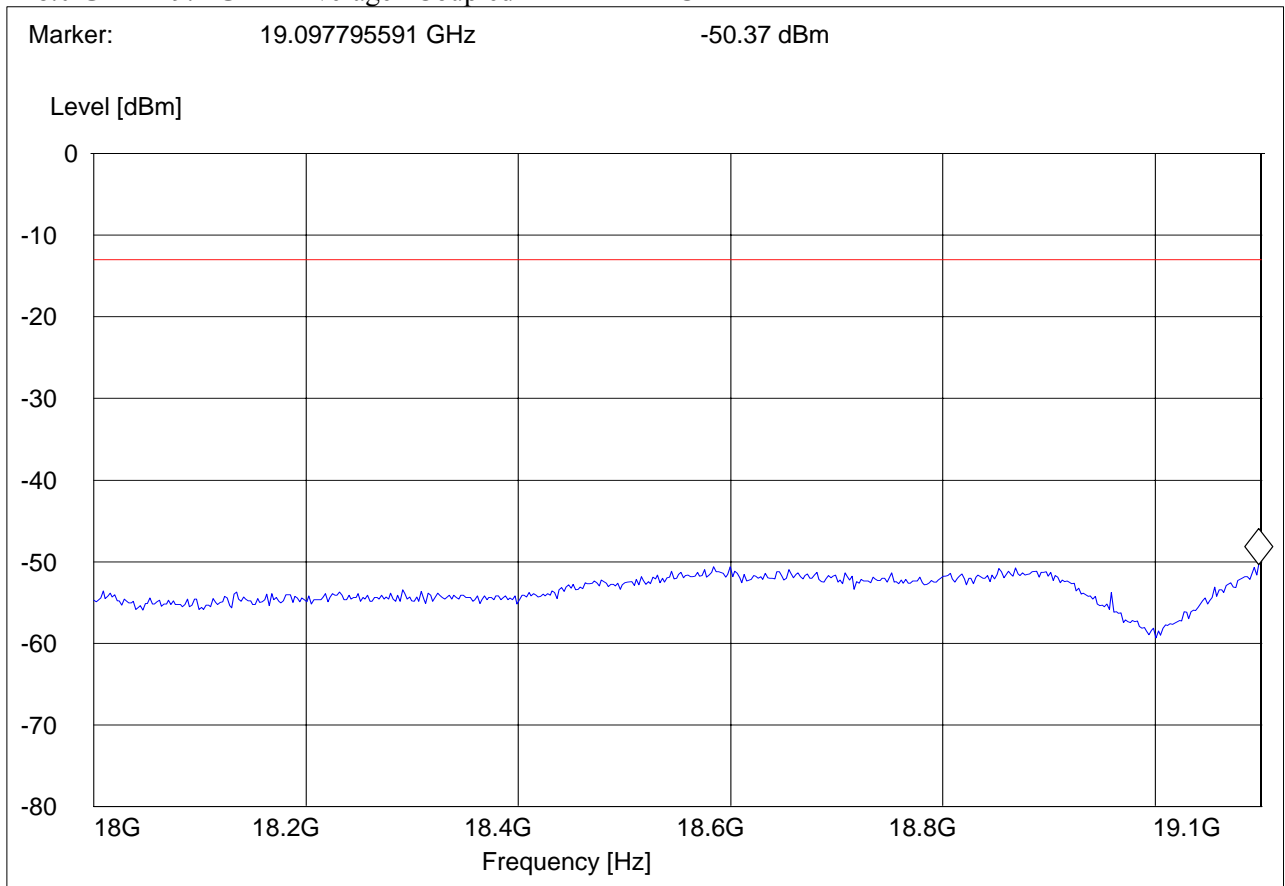



### 5.5.5 RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 & 133

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

Limits	SUBCLAUSE § RSS-133	
Frequency (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

No significant emissions measurable. Plots reported here represent the worse case emissions.

**5.5.5.1 Test Results Receiver Spurious Emission GSM850**


**30M-1GHz, Antenna Vertical**

**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II RX  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: SAM  
 Voltage: AC  
 Comments: FCC Adapter

***SWEEP TABLE: "CANADA RE\_30M-1G\_Ver"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

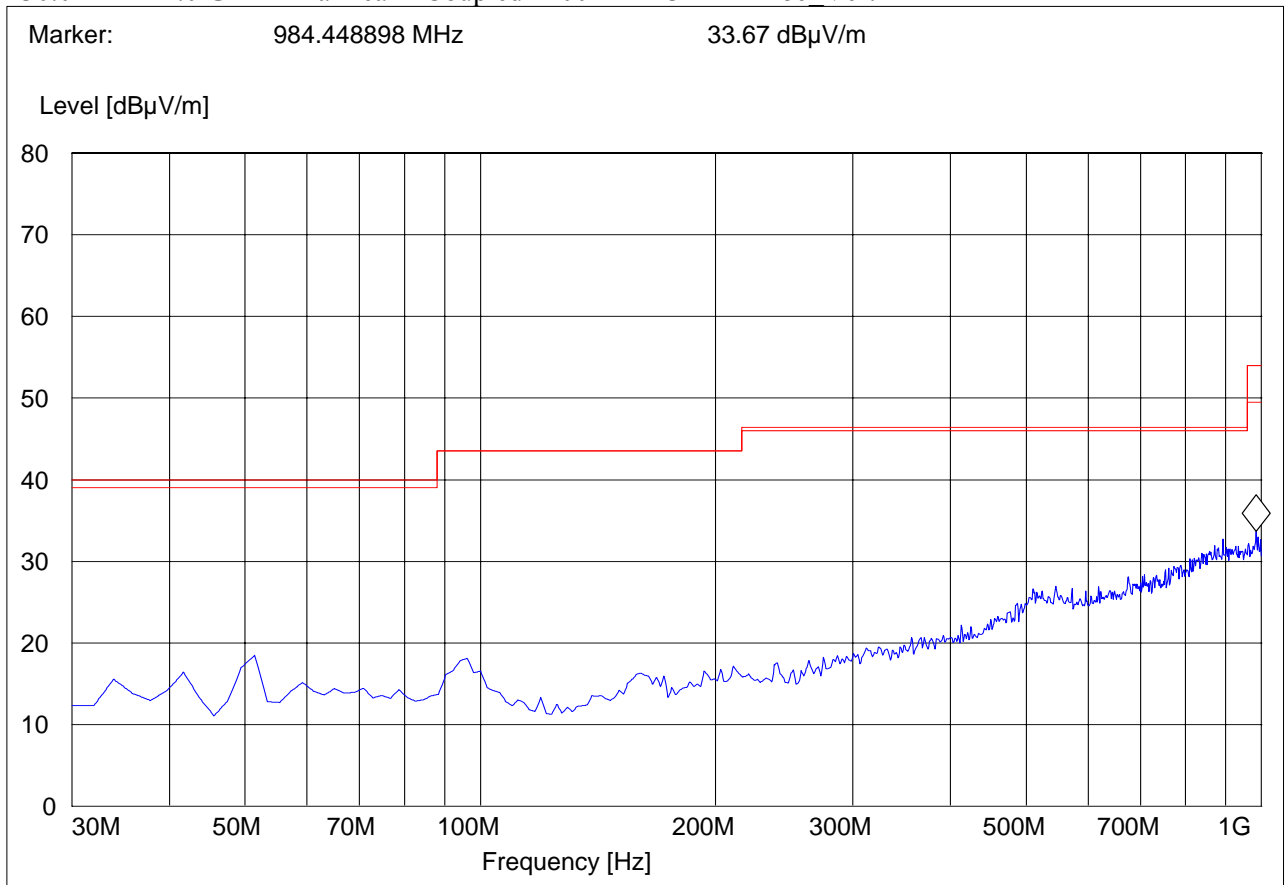


**Receiver Spurious Emission GSM850 30M-1GHz, Antenna Horizontal**  
**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II RX  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: SAM  
 Voltage: AC  
 Comments: FCC Adapter

***SWEEP TABLE: "CANDA RE\_30M-1G\_Hor"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186 Horz

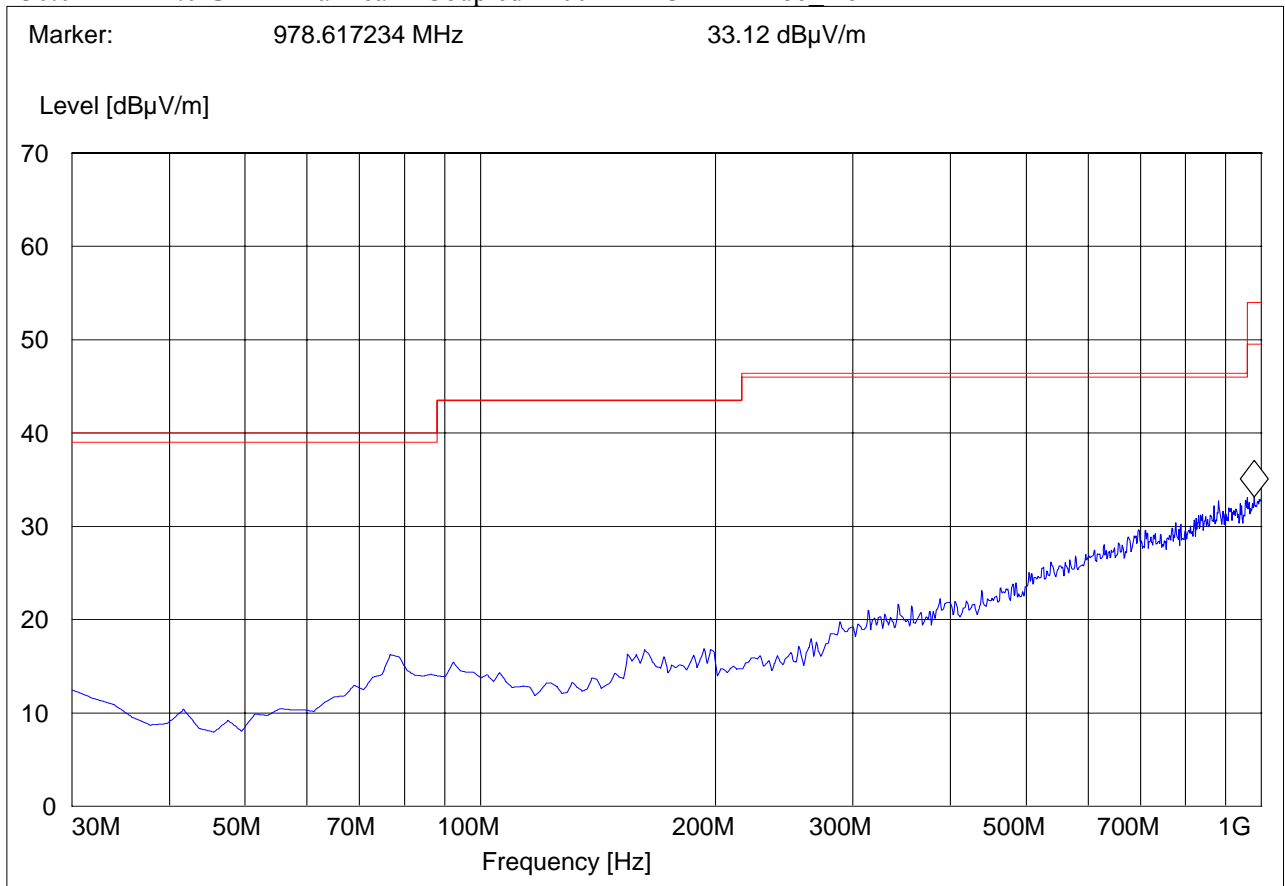



**Receiver Spurious Emission GSM850 1-18GHz**

**This plot is valid for low, mid & high channels (worst-case plot)**

EUT / Description: A1303

Customer: Apple

Operation Mode: GSM 850 Rx

ANT Orientation: : H

EUT Orientation: V


Test Engineer: Chris

Voltage: FCC AC Adapter

Comments:

***SWEEP TABLE: "CANADA RE\_1-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn AF horz

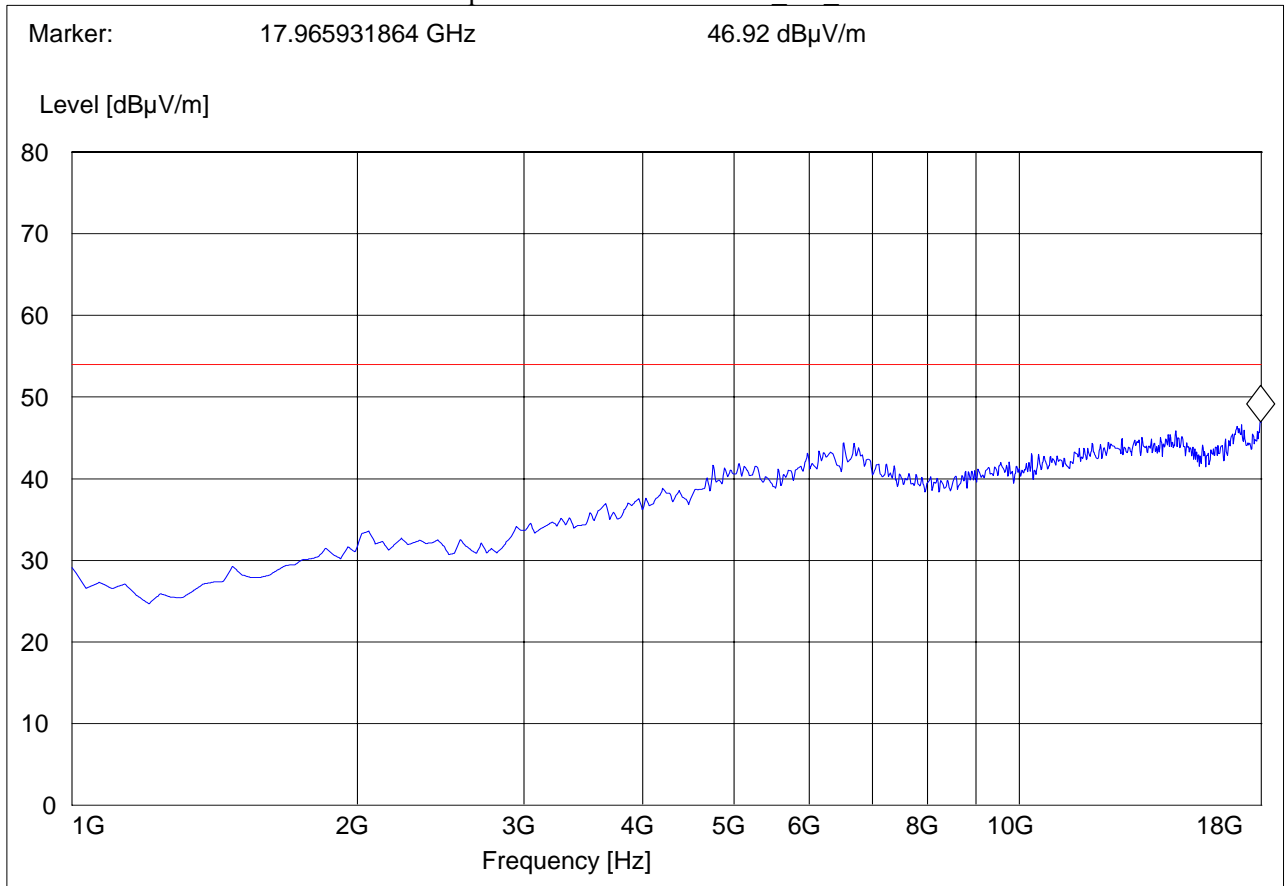



**5.5.5.2 Test Results Receiver Spurious Emission UMTS FDD5**


**30M-1GHz, Antenna Vertical**

**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V RX  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: SAM  
 Voltage: AC  
 Comments: FCC Adapter

***SWEEP TABLE: "CANADA RE\_30M-1G\_Ver"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

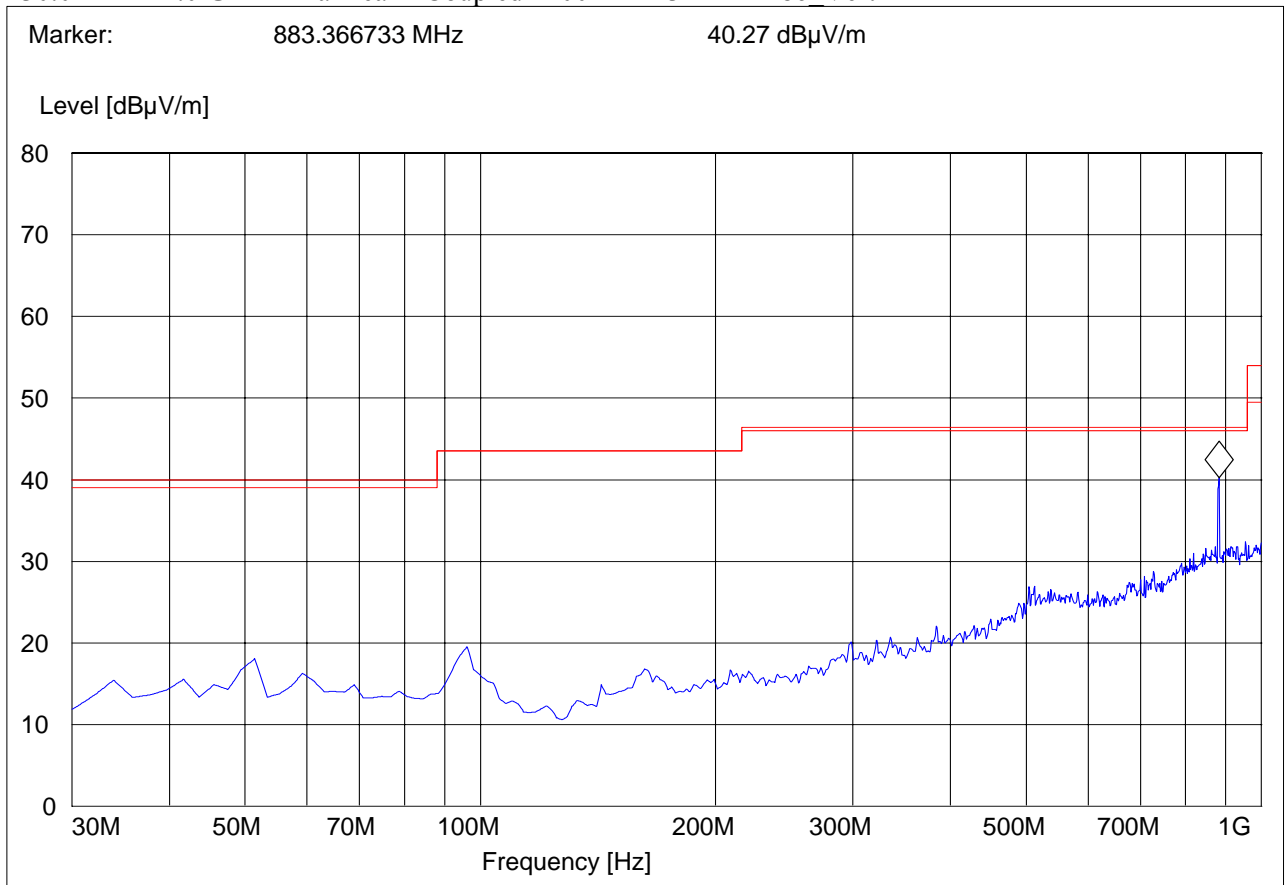




**Receiver Spurious Emission UMTS FDD5 30M-1GHz, Antenna Horizontal**  
**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD V RX  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: SAM  
 Voltage: AC  
 Comments: FCC Adapter

**SWEEP TABLE: "CANDA RE\_30M-1G\_Hor"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186 Horz

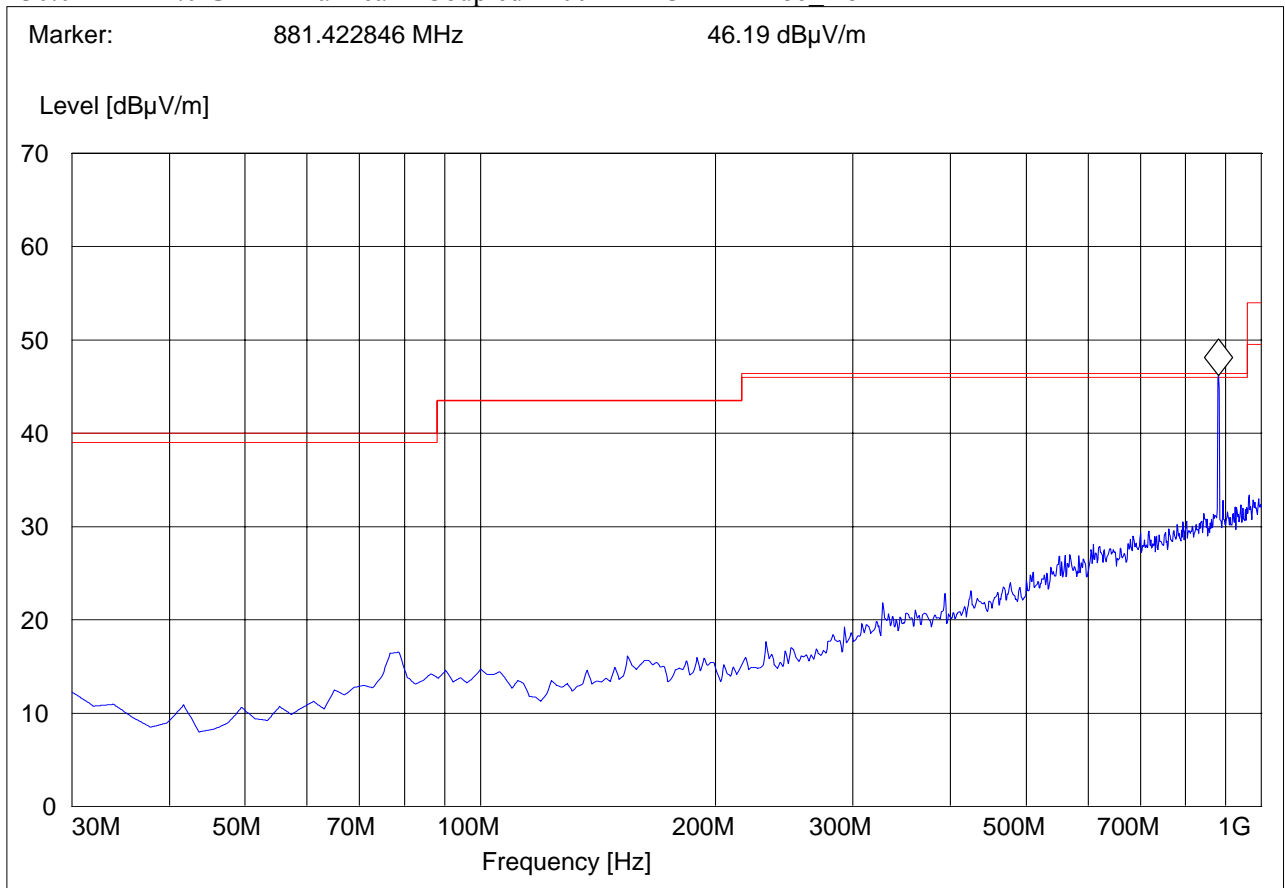



**Receiver Spurious Emission UMTS FDD5 1-18GHz**

**This plot is valid for low, mid & high channels (worst-case plot**


**CETECOM Inc.**

411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: A1303  
 Customer: Apple  
 Operation Mode: FDD V Rx  
 ANT Orientation: : H  
 EUT Orientation:: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter  
 Comments::

**SWEEP TABLE: "CANADA RE\_1-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

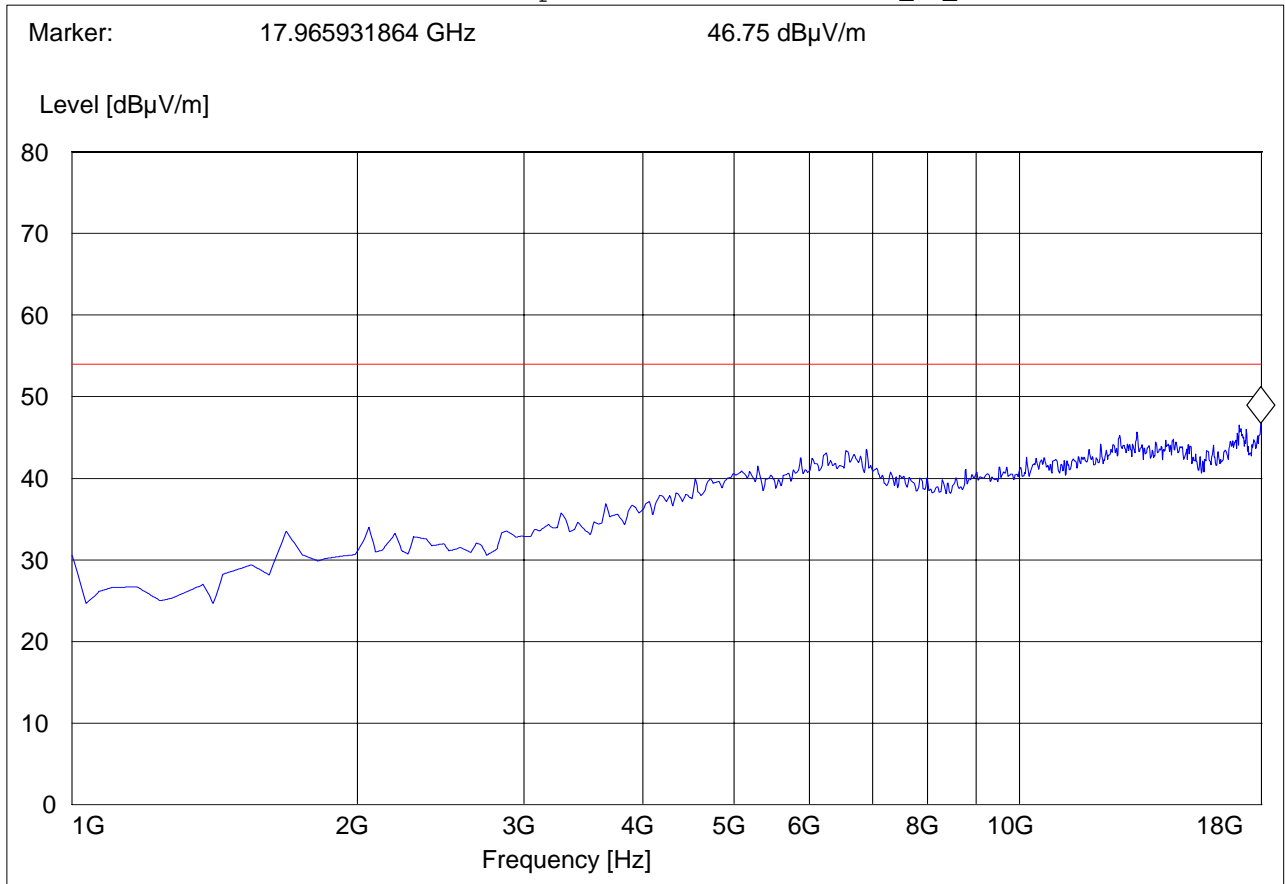


**5.5.5.3 Test Results Receiver Spurious Emission GSM1900  
30M-1GHz, Antenna Vertical  
This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: GSM 1900 RX  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: SAM  
 Voltage: AC  
 Comments: FCC Adapter

***SWEEP TABLE: "CANADA RE\_30M-1G\_Ver"***

Start Stop Detector Meas. IF Transducer  
 Frequency Frequency Time Bandw.  
 30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz 3141-#1186\_Vert

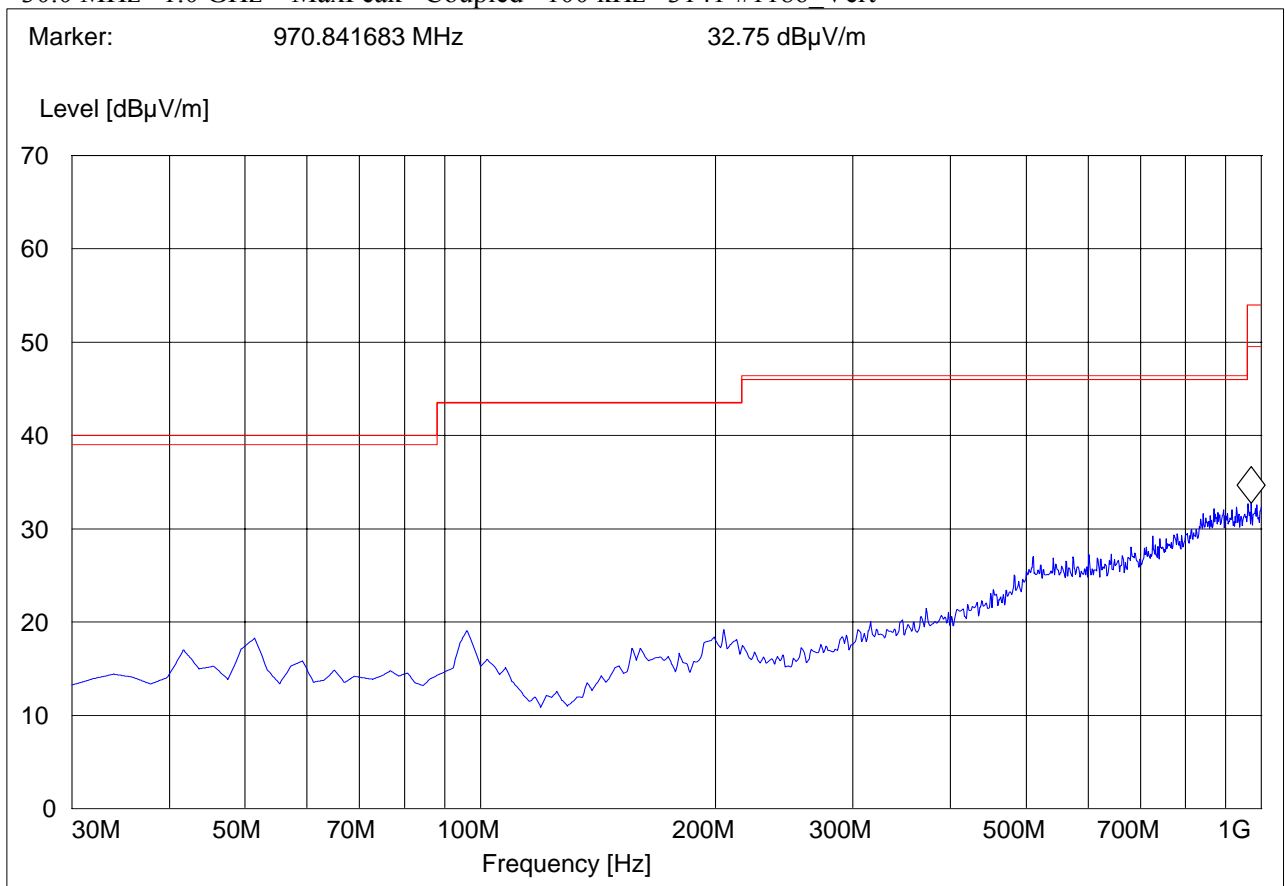






**Receiver Spurious Emission GSM1900 30M-1GHz, Antenna Horizontal**  
**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: GSM 1900 RX  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: SAM  
 Voltage: AC  
 Comments: FCC Adapter

**SWEEP TABLE: "CANDA RE\_30M-1G\_Hor"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186 Horz

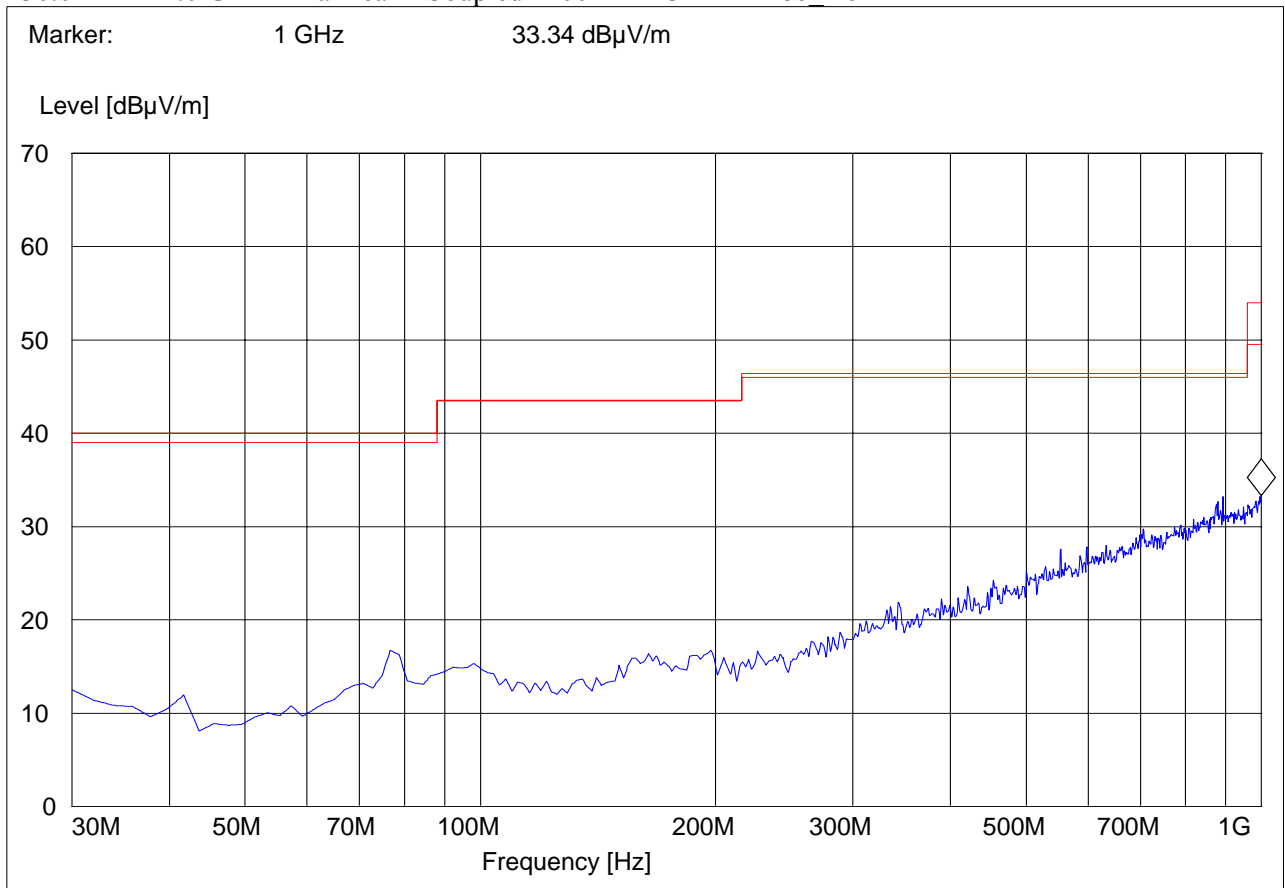



**Receiver Spurious Emission GSM1900 1-18GHz**

**This plot is valid for low, mid & high channels (worst-case plot)**

EUT / Description: A1303

Customer: Apple

Operation Mode: GSM 1900 Rx

ANT Orientation: : H

EUT Orientation: V


Test Engineer: Chris

Voltage: FCC AC Adapter

Comments:

***SWEEP TABLE: "CANADA RE\_1-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn AF horz

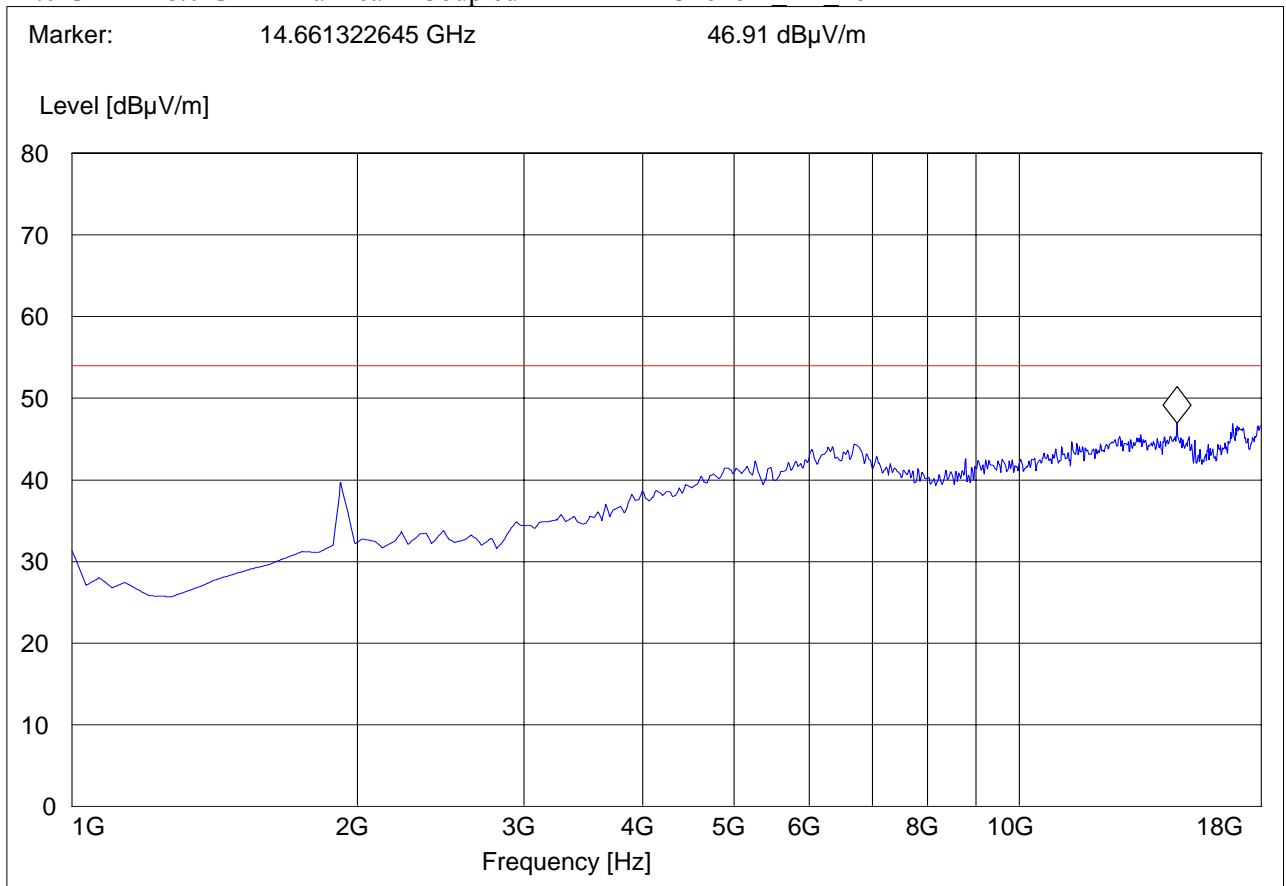



**5.5.5.4 Test Results Receiver Spurious Emission UMTS FDD2**


**30M-1GHz, Antenna Vertical**

This plot is valid for low, mid & high channels (worst-case plot)

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II RX  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: SAM  
 Voltage: AC  
 Comments: FCC Adapter

**SWEEP TABLE: "CANADA RE\_30M-1G\_Ver"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

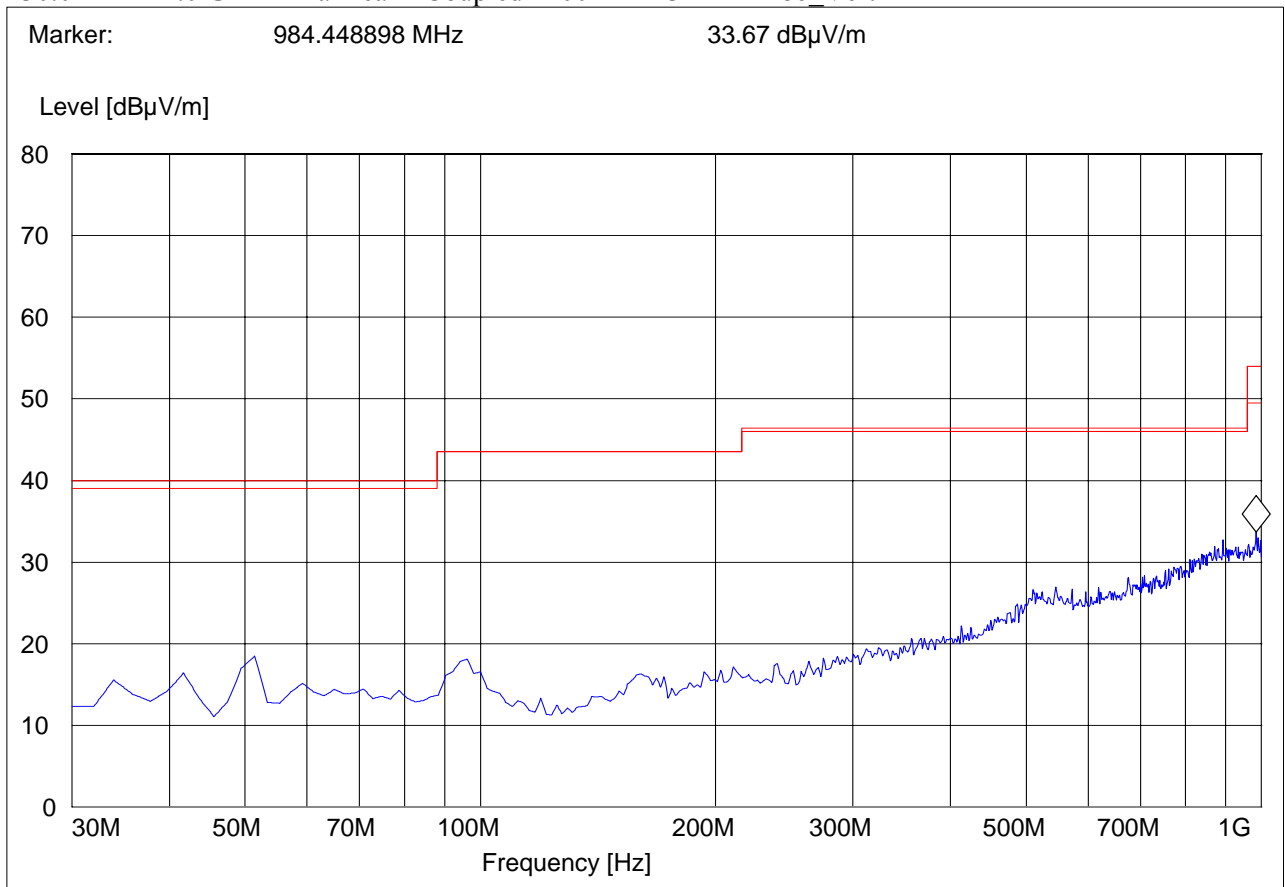




**Receiver Spurious Emission UMTS FDD2 30M-1GHz, Antenna Horizontal**  
**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: A1303  
 Customer:: Apple  
 Test Mode: FDD II RX  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: SAM  
 Voltage: AC  
 Comments: FCC Adapter

**SWEEP TABLE: "CANDA RE\_30M-1G\_Hor"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186 Horz

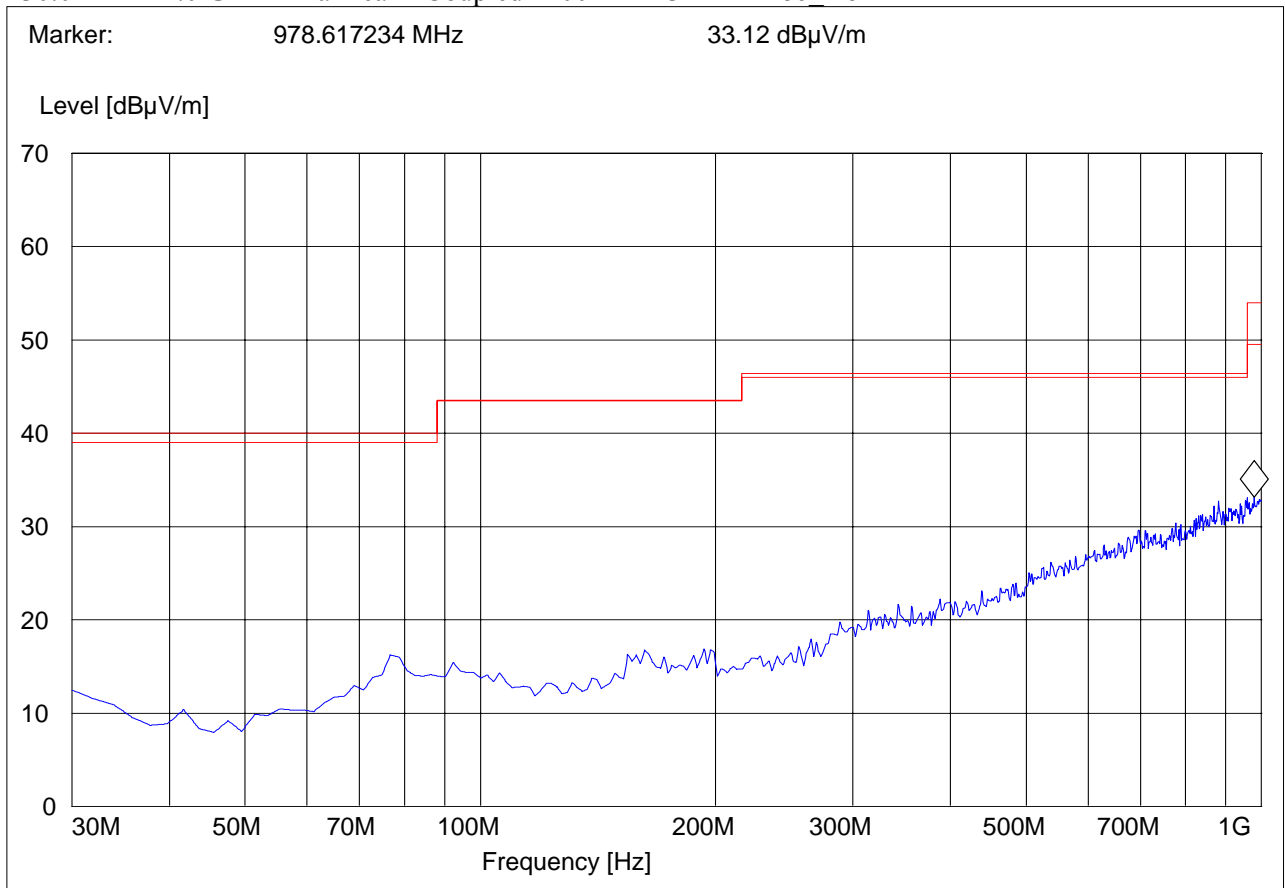




**Receiver Spurious Emission UMTS FDD2: 1-18GHz  
CETECOM Inc.**

**411 Dixon Landing Road; Milpitas, CA 95035**

EUT / Description: A1303  
 Customer: Apple  
 Operation Mode: FDD V Rx  
 ANT Orientation: : H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: FCC AC Adapter

**SWEEP TABLE: "CANADA RE\_1-18G"**

Start Stop Detector Meas. IF Transducer  
 Frequency Frequency Time Bandw.  
 1.0 GHz 18.0 GHz MaxPeak Coupled 1 MHz #326horn AF horz

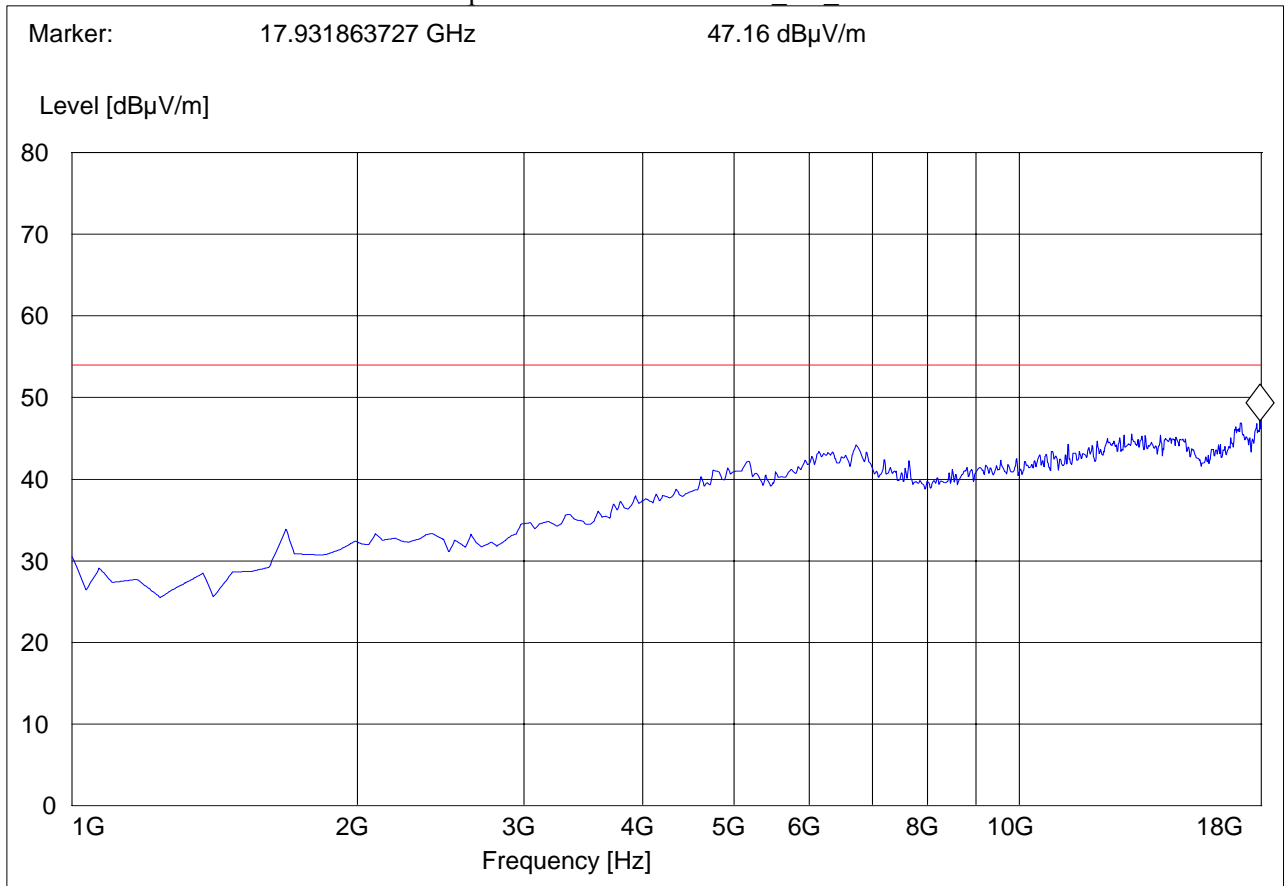

## 5.6 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

### 5.6.1 Limits

**Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)**

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

#### **Limit**

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50


\* Decreases with logarithm of the frequency

**ANALYZER SETTINGS: RBW = 10KHz**

**VBW = 10KHz**

# LINE 850 TX Line

CISPR 22 Mains Conducted - L

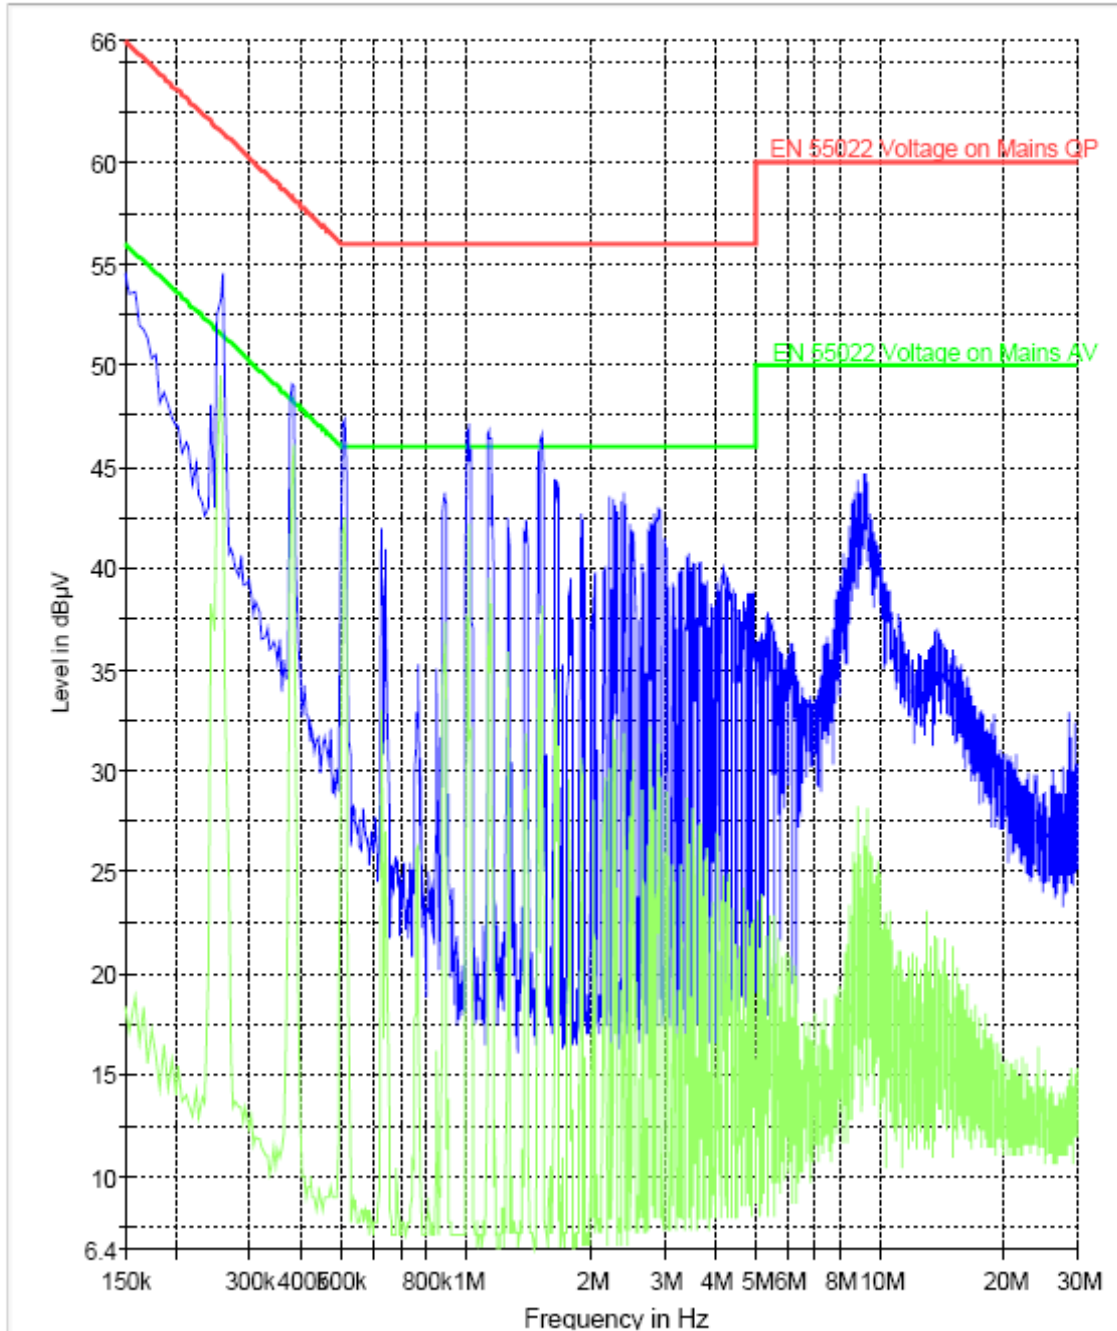


EN 55022 Voltage on Mains QP Limit Line      EN 55022 Voltage on Mains AV Limit Line  
Preview Result 1      Preview Result 2

# NEUTRAL 850 TX

## Neutral

CISPR 22 Mains Conducted - N

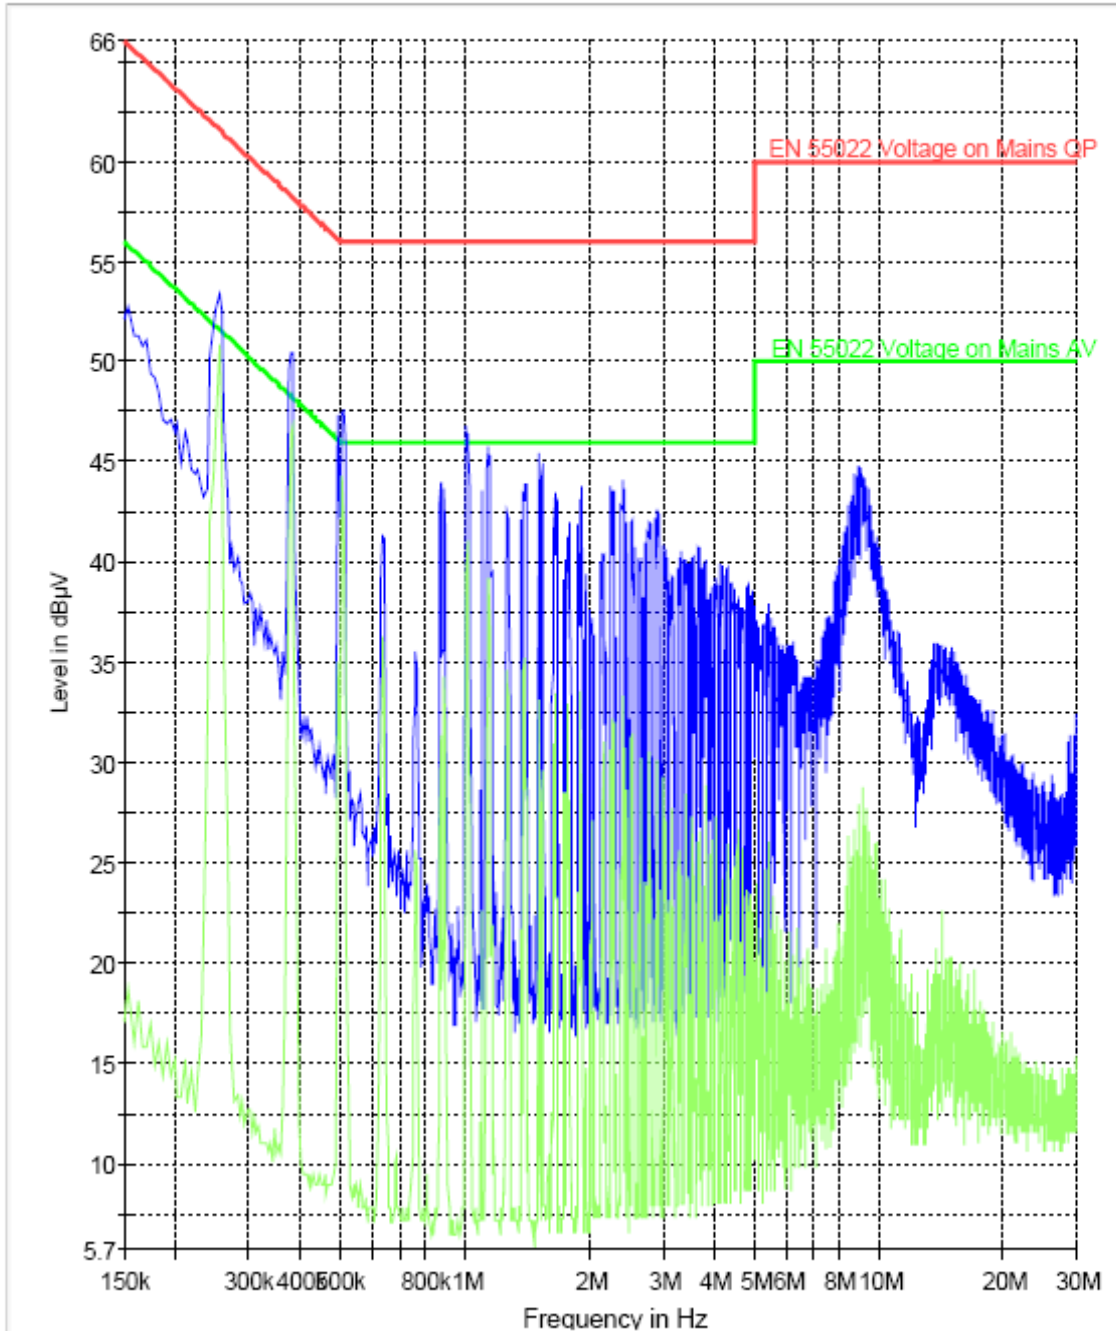


EN 55022 Voltage on Mains GP.LimitLine  
EN 55022 Voltage on Mains AV.LimitLine  
Preview Result 1  
Preview Result 2



LINE WCDMA FDDV TX

# Line

CISPR 22 Mains Conducted - L

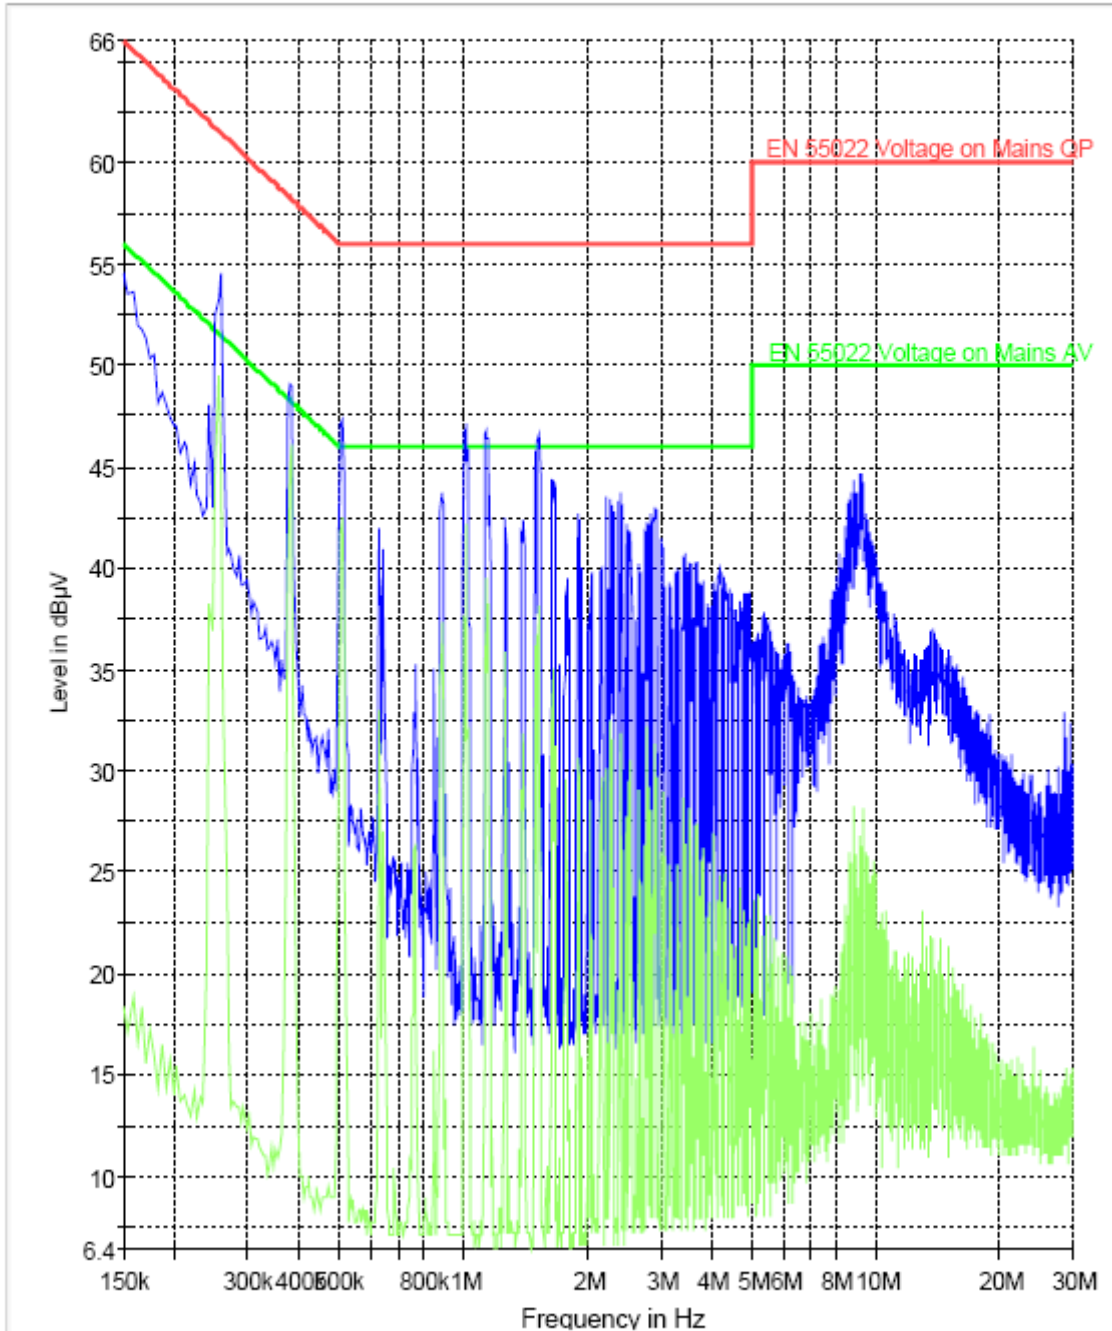


EN 55022 Voltage on Mains GP.LimitLine  
EN 55022 Voltage on Mains AV.LimitLine  
Preview Result 1  
Preview Result 2

NEUTRAL WCDMA FDD V

# Neutral

CISPR 22 Mains Conducted - N

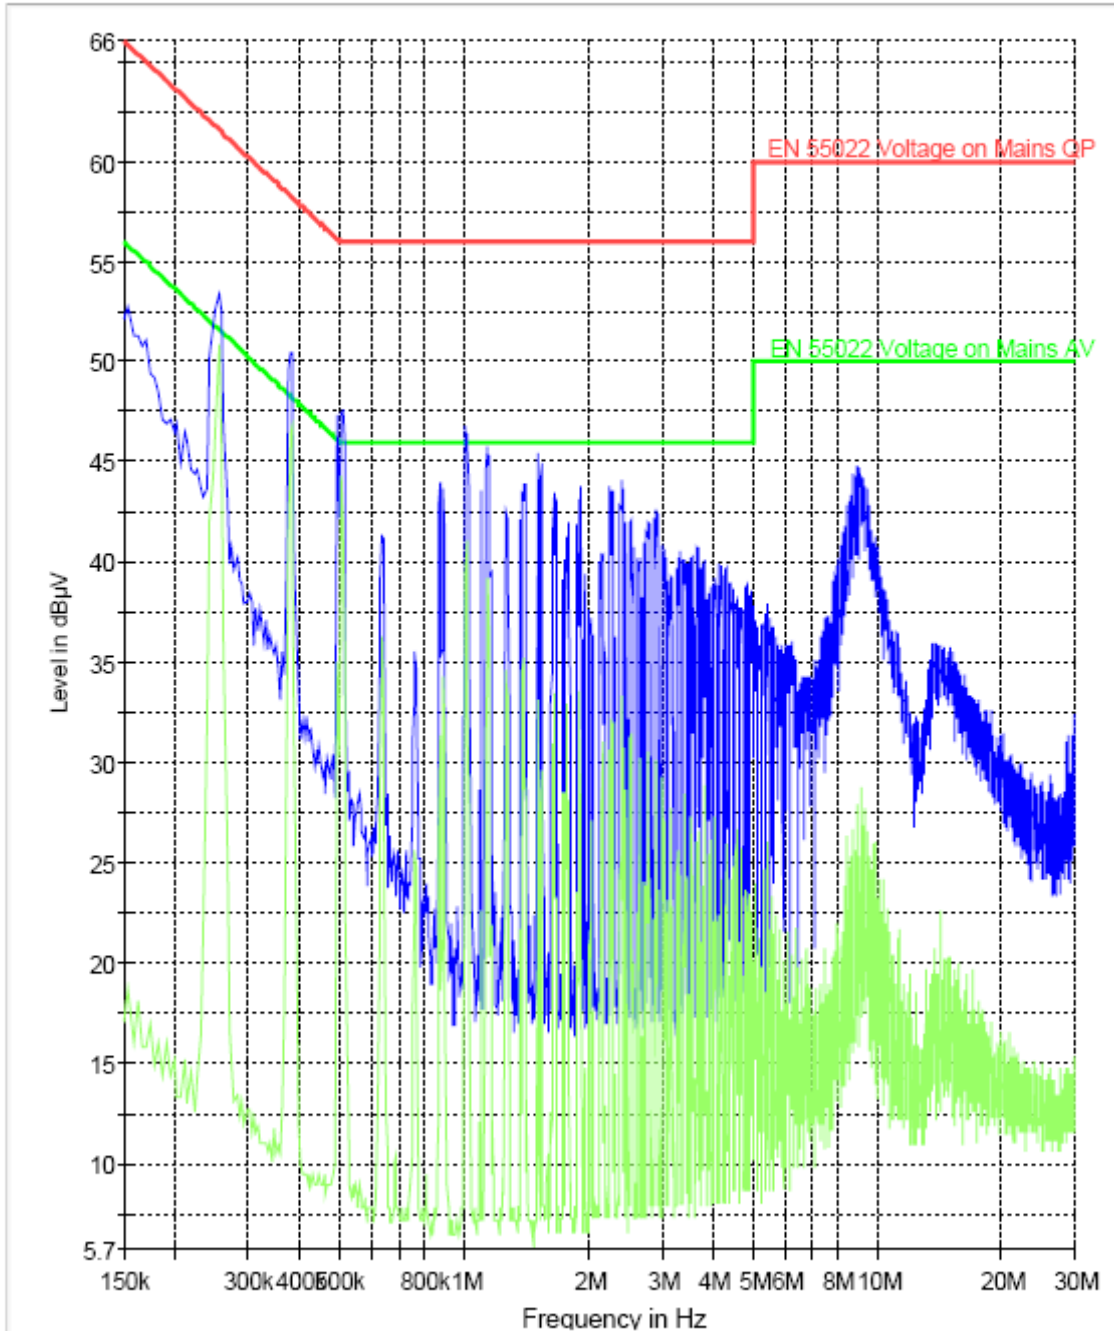


EN 55022 Voltage on Mains GP.LimitLine  
EN 55022 Voltage on Mains AV.LimitLine  
Preview Result 1  
Preview Result 2

LINE GSM 1900 TX

# Line

CISPR 22 Mains Conducted - L

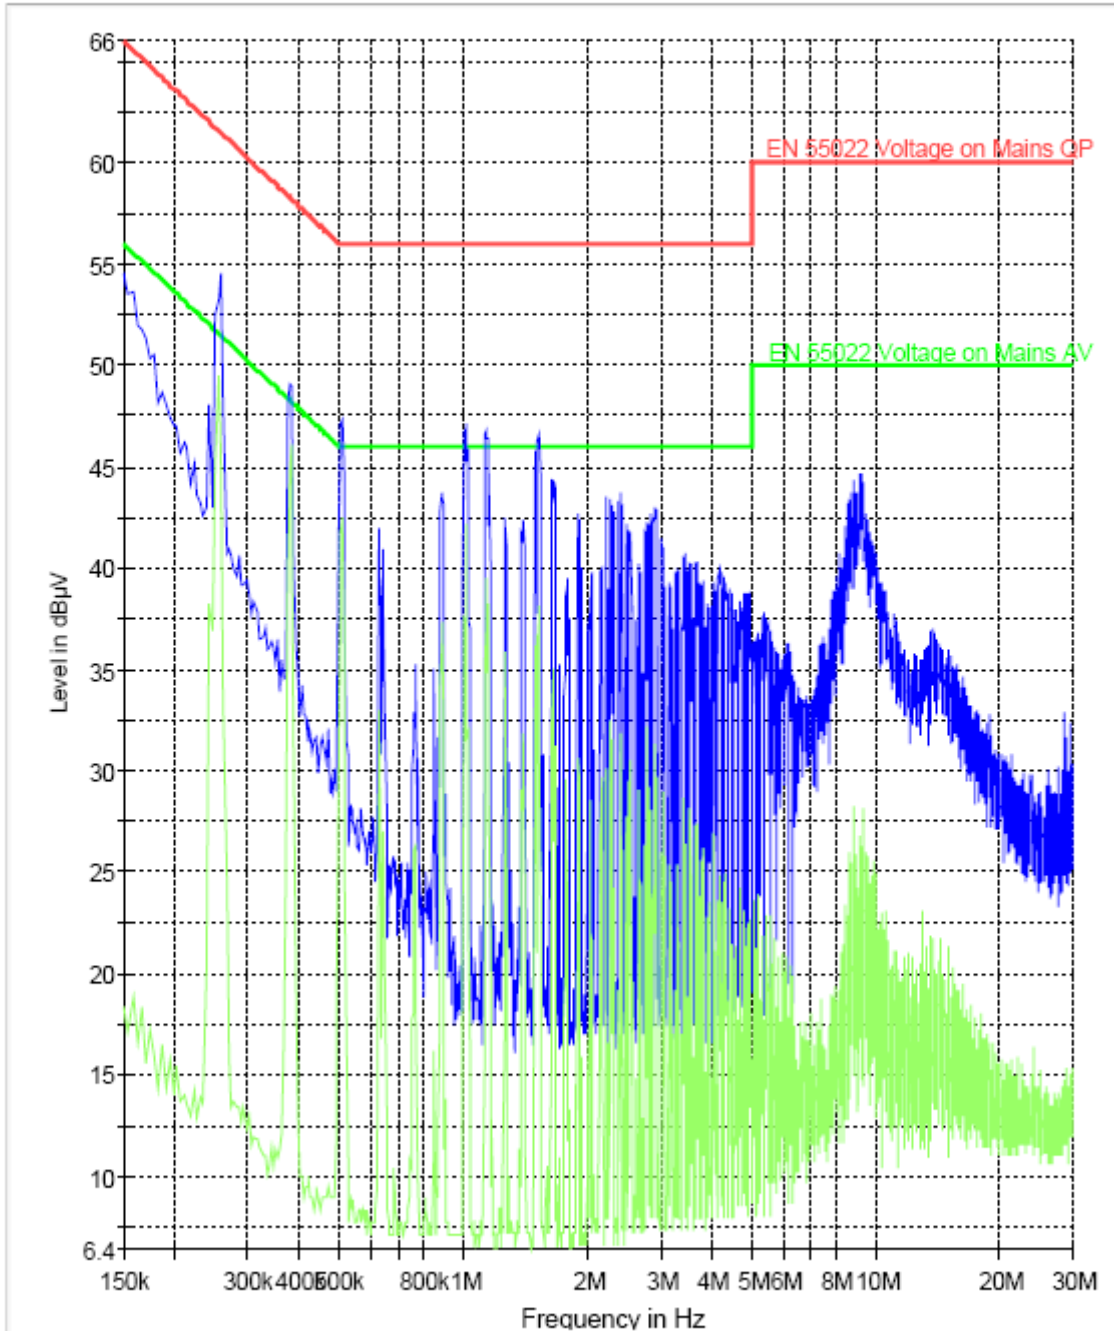


EN 55022 Voltage on Mains QP.LimitLine  
EN 55022 Voltage on Mains AV.LimitLine  
Preview Result 1  
Preview Result 2

NEUTRAL GSM 1900 TX

# Neutral

CISPR 22 Mains Conducted - N

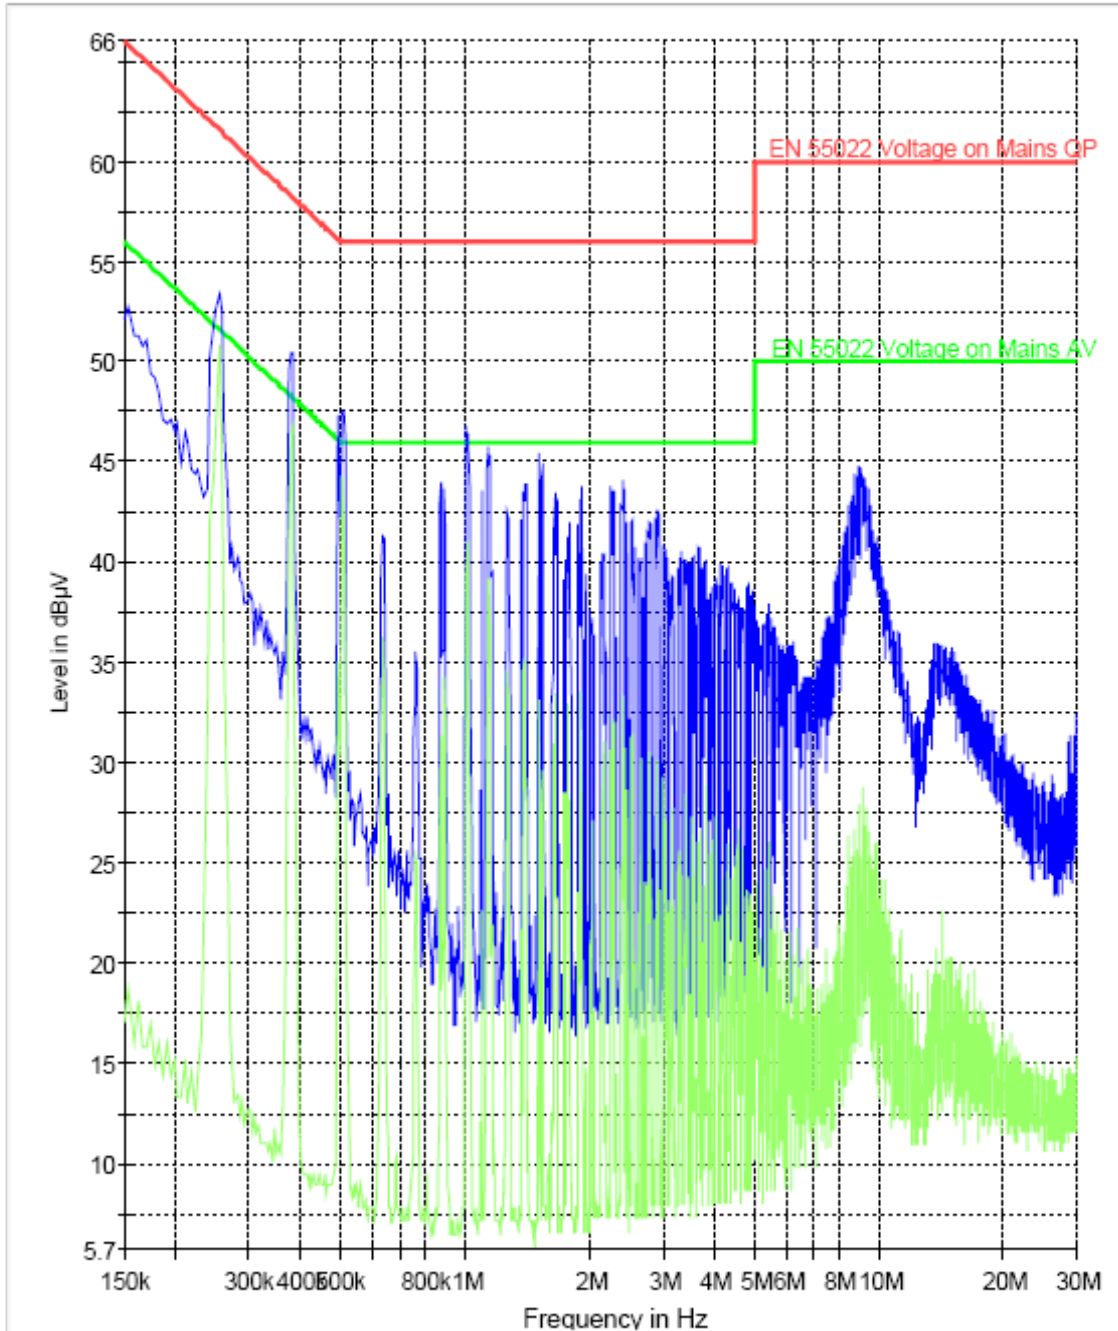


EN 55022 Voltage on Mains GP.LimitLine      EN 55022 Voltage on Mains AV.LimitLine  
Preview Result 1      Preview Result 2

LINE FDD II RX

# Line

CISPR 22 Mains Conducted - L

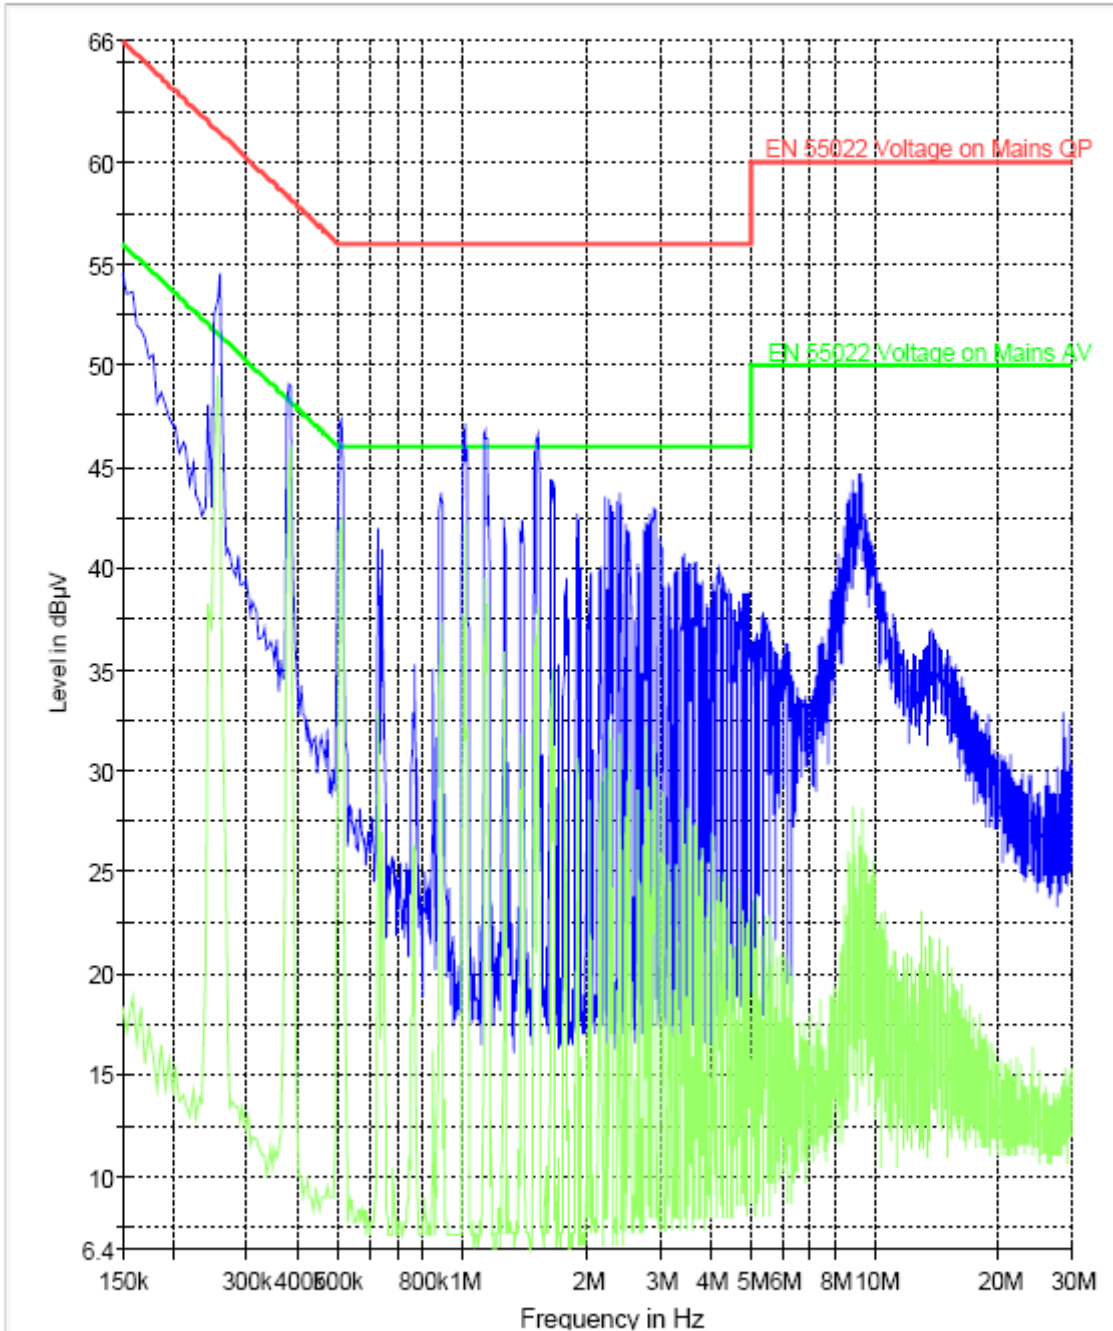


EN 55022 Voltage on Mains QP.LimitLine  
EN 55022 Voltage on Mains AV.LimitLine  
Preview Result 1  
Preview Result 2

NEUTRAL FDD II RX

# Neutral

CISPR 22 Mains Conducted - N

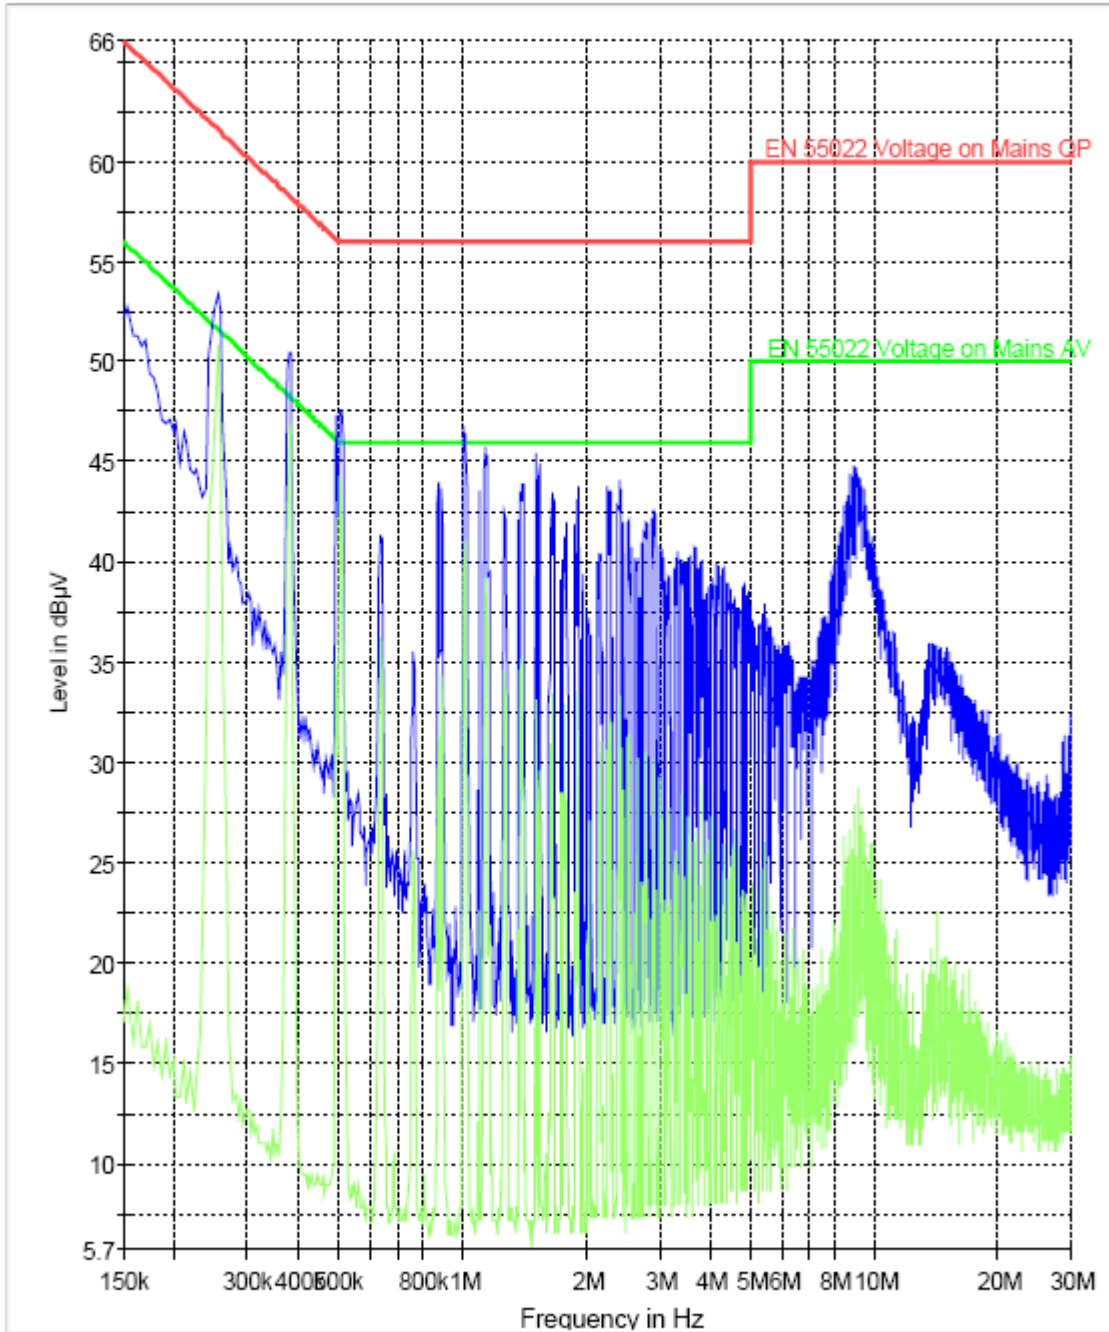

EN 55022 Voltage on Mains GP LimitLine  
EN 55022 Voltage on Mains AV LimitLine  
Preview Result 1  
Preview Result 2

## 6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2010	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2010	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2010	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2010	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2010	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2010	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2010	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsc	G1115	May 2010	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2010	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2010	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2010	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2010	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2010	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2010	2 years

## **7 References**

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 22 PUBLIC MOBILE SERVICES October 1, 1998.

FCC Report and order 02-229 September 24, 2002.


Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-C-2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.



## 8 BLOCK DIAGRAMS

### Conducted Testing

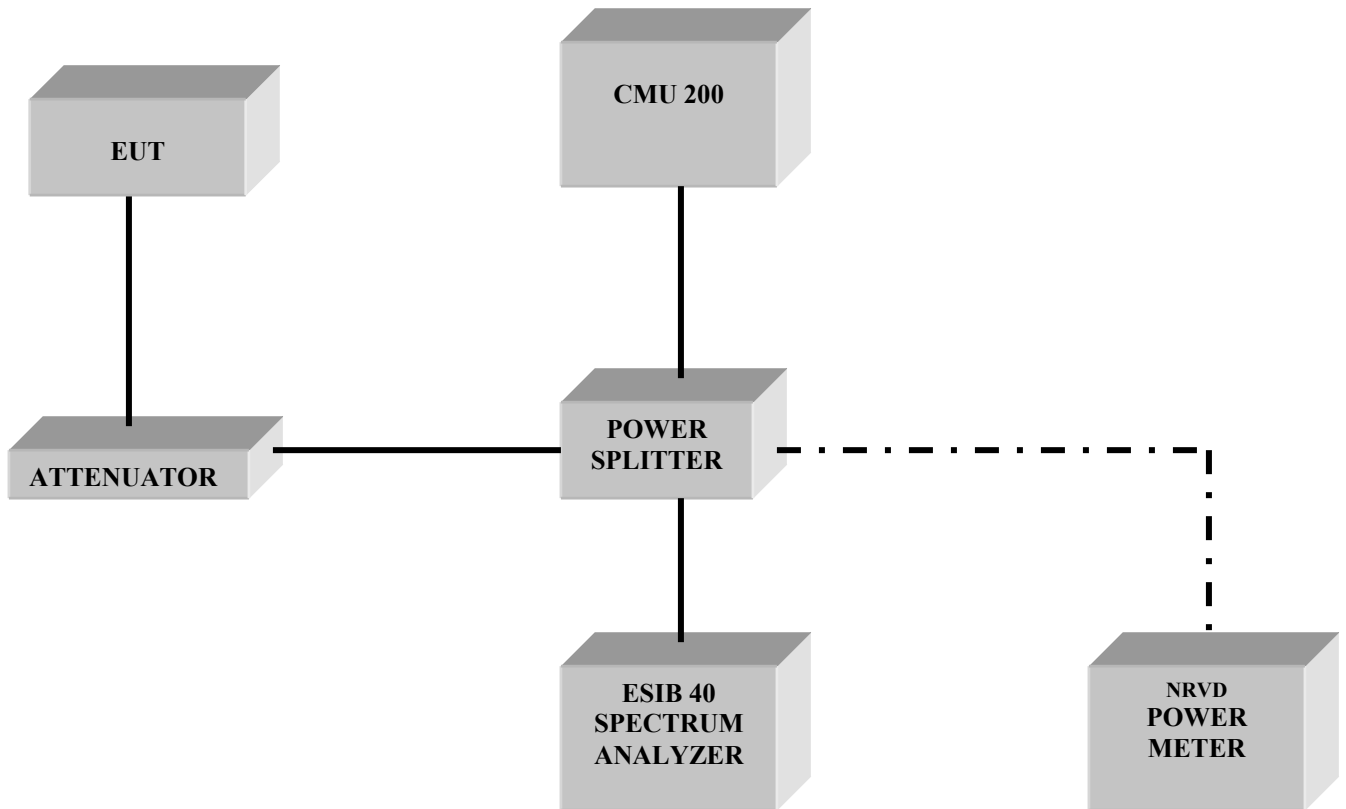

### Radiated Testing

#### ANECHOIC CHAMBER

