



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

802.11 a/b/g/n + BT2.1

MODEL NUMBER: A1395

FCC ID: BCGA1395

IC: 579C-A1395

REPORT NUMBER: 10U13548-19, Revision A

ISSUE DATE: FEBRUARY 24, 2011

Prepared for

APPLE, INC.

1 INFINITE LOOP

CUPERTINO, CA 95014, U.S.A.

Prepared by

COMPLIANCE CERTIFICATION SERVICES (UL CCS)

47173 BENICIA STREET

FREMONT, CA 94538, U.S.A.

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	02/15/11	Initial Issue	F. Ibrahim
A	02/24/11	Revised description of EUT setup section, removed MPE section, removed AV power sections, and added co-location info in section 5.5.	F. Ibrahim

8.4. WORST-CASE BELOW 1 GHz..... 100

9. AC POWER LINE CONDUCTED EMISSIONS..... 103

10. SETUP PHOTOS 107

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA, 95014, U.S.A.

EUT DESCRIPTION: 802.11a/b/g/n + BT 2.1

MODEL: A1395

SERIAL NUMBER: PT523312

DATE TESTED: FEBRUARY 5-12, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



FRANK IBRAHIM
EMC SUPERVISOR
UL CCS

Tested By:



TOM CHEN
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

802.11 a/b/g/n + BT2.1

The radio module is manufactured by Apple, Inc.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	13.94	24.77
2402 - 2480	Enhanced 8PSK	13.80	23.99

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes the following antenna:

Antenna Name	Description	Manufacturer	Cable Length
631-1482 WiFi / Bluetooth	PIFA	Amphenol / Tyco	81.6 mm

	631-1482 WiFi / Bluetooth
	Peak Gain (includes Cable)
Freq [GHz]	dBi
2.4-2.484	0.59
5.15 - 5.25	4.07
5.25 - 5.35	4.2
5.47-5.725	4.21
5.725-5.85	3.57

5.4. SOFTWARE AND FIRMWARE

The firmware installed on the EUT was version 4.221.50.2 (BCM MFGTEST)

The EUT driver rev: 0x4dd3202

The test utility software: wl.exe version: 4.218 RC175.1

The test utility software used during testing was Bluetooth Test Mode with CBT.

5.5. WORST-CASE CONFIGURATION AND MODE

For radiated emissions below 1 GHz and Power Line Conducted Emissions, the worst-case configuration is determined to be the mode and channel with the highest output power

To determine the worst-position of highest emissions, the EUT's antenna was investigated for X, Y, Z positions, and the worst position was turned out to be a Y-position.

Radiated Co-located BE and Harmonics was performed for worst-case mode which was 11a in the 5.3 GHz band and it was found that the results of the co-located are not worse than the non-co-located testing, therefore, co-located for DTS band is not necessary.

5.6. DESCRIPTION OF TEST SETUP


SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	A1286	W8917005998	DoC
Laptop AC Adapter	Apple	A1290	N/A	DoC

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	N/A
2	DC	1	DC	Un-shielded	2m	N/A
3	USB	1	USB	Un-shielded	1m	Connect to Laptop

SETUP DIAGRAM FOR TESTS

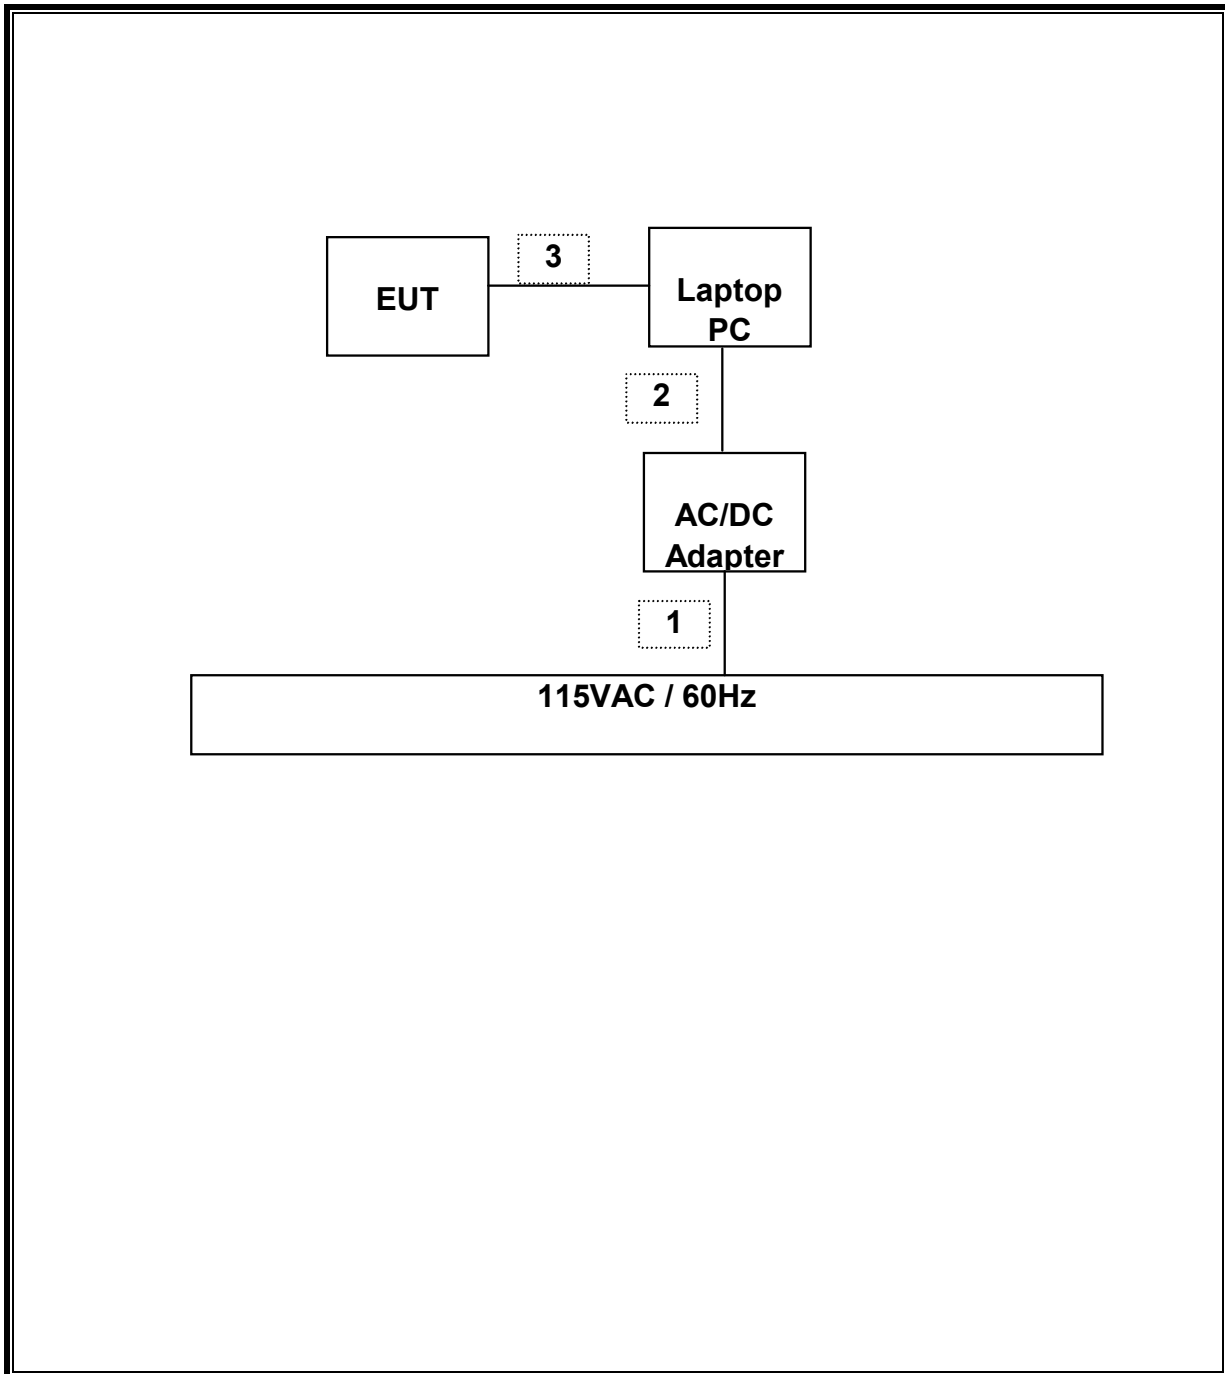

Note: laptop PC was used to control the operation of the EUT.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	07/14/11
Antenna, Horn, 18 GHz	EMCO	3115	C00945	06/29/11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	01/06/11
Antenna, Bilog, 2 GHz	Sundt Sciences	JB1	C01016	07/12/11
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/06/11
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	05/06/11
Reject Filter, 2.0-2.9 GHz	Micro-Tronics	BRM50702	N02684	CNR
High Pass Filter, 7.6 GHz	Micro-Tronics	HPM13195	N02682	CNR
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/30/11
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01159	05/08/11
Peak Power Meter	Boonton	4541	C01186	03/01/11
Peak Power Sensor	Boonton	57318	C01202	02/23/11

7. ANTENNA PORT TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	1047.0	1012.4
Middle	2441	1048.0	1018.4
High	2480	1047.0	1019.2


20 dB BANDWIDTH

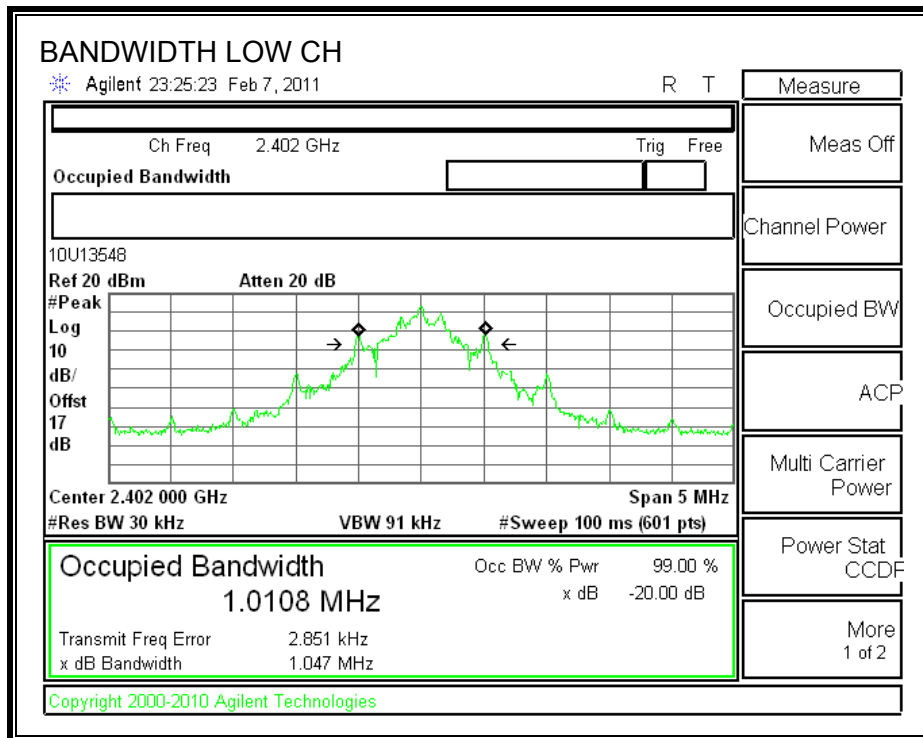


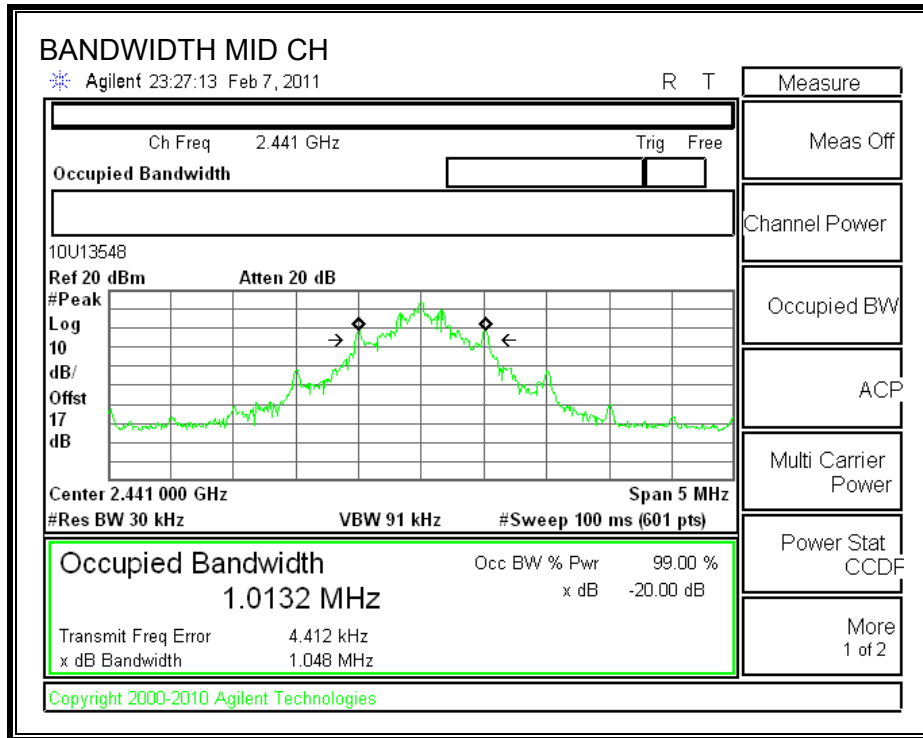


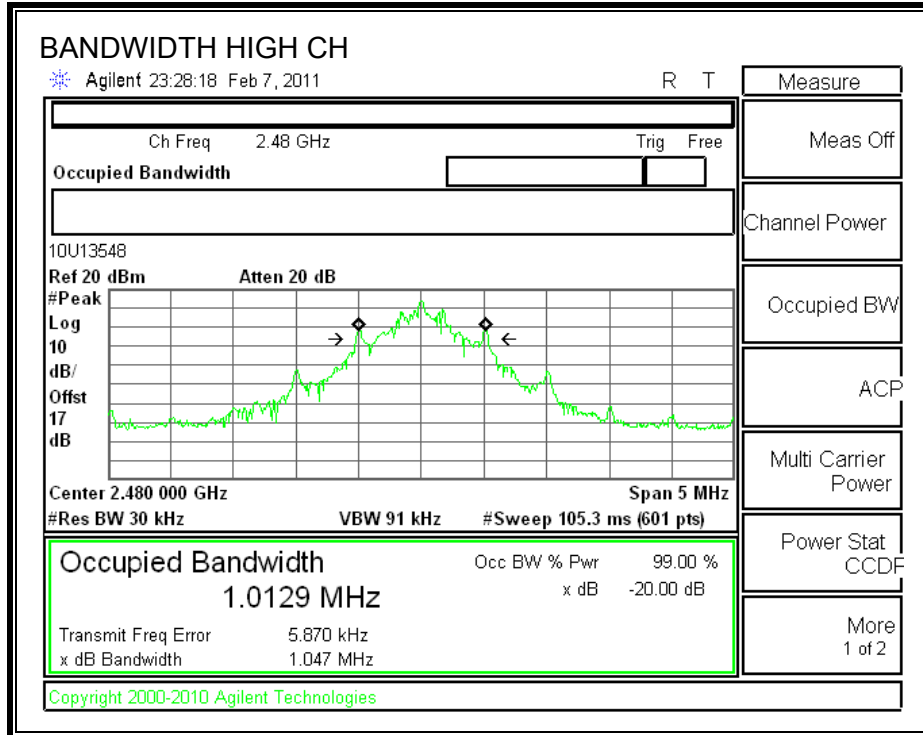

99% BANDWIDTH

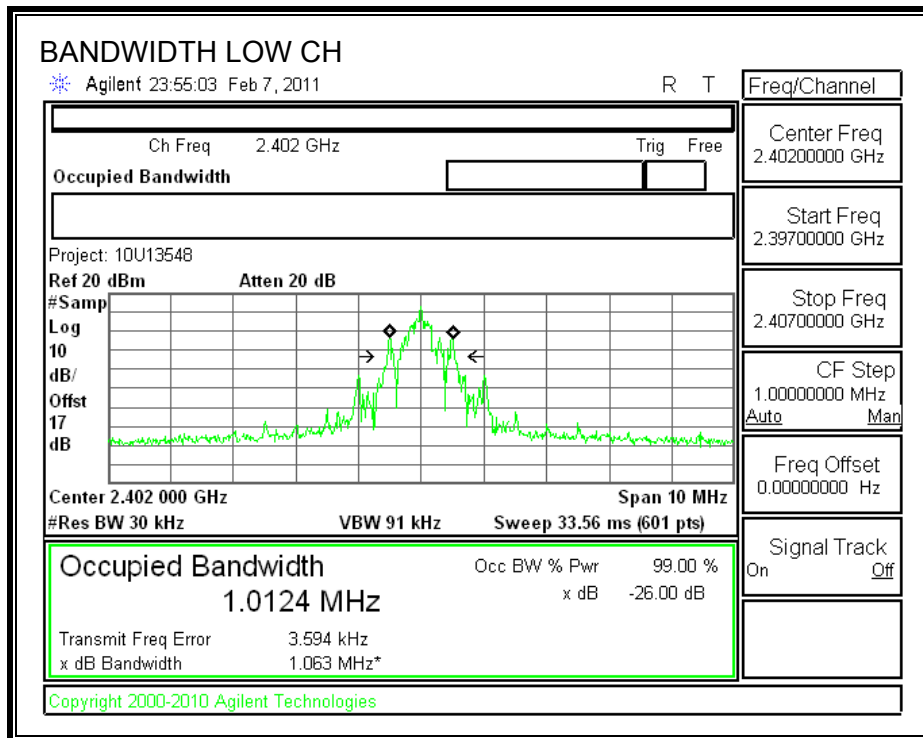

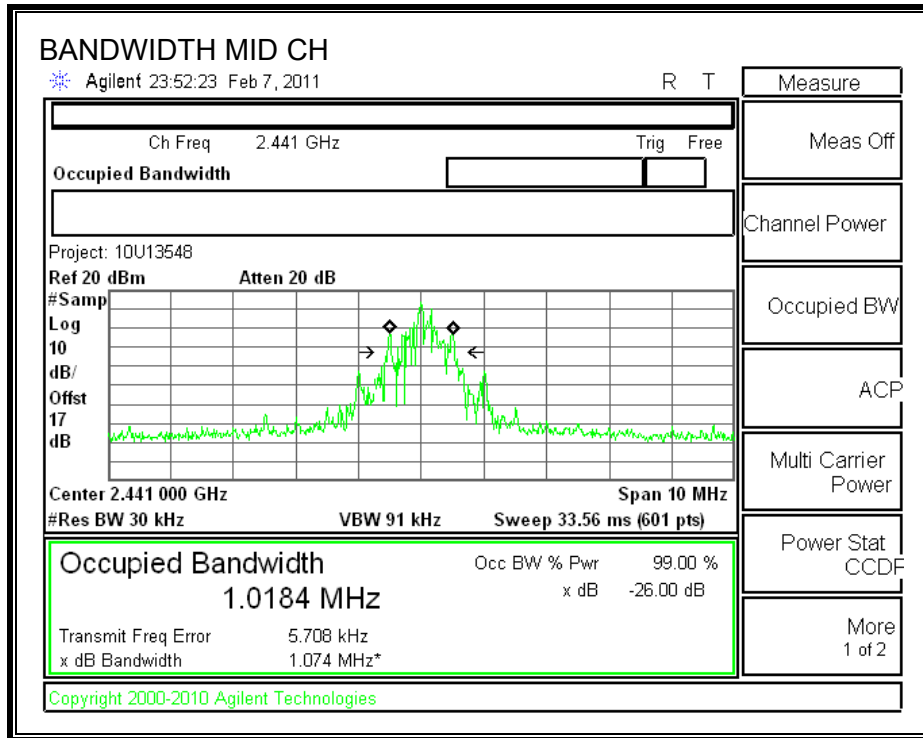

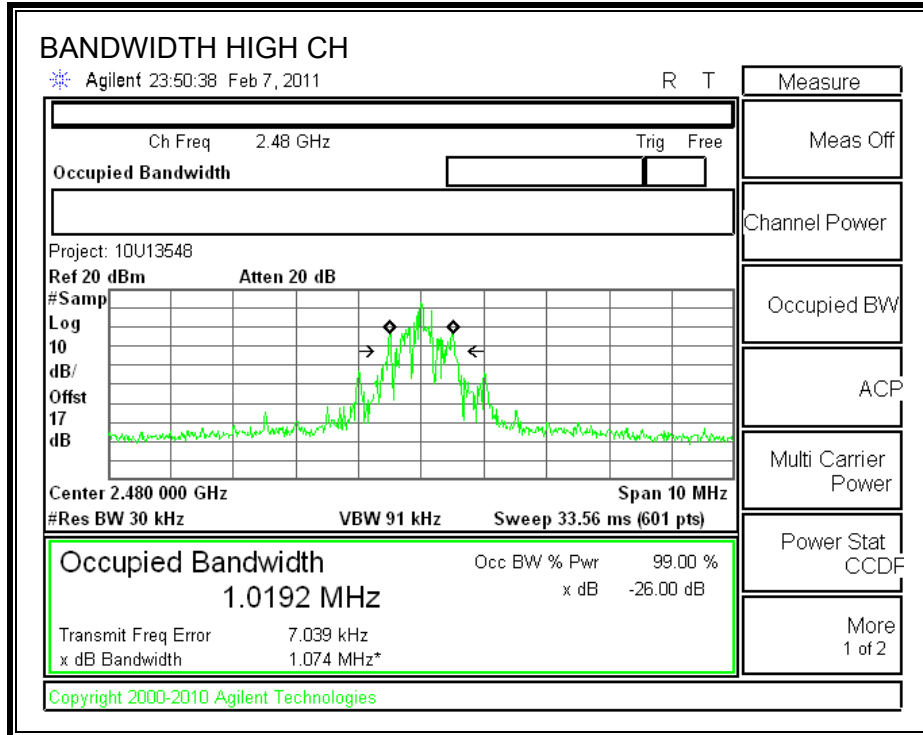

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

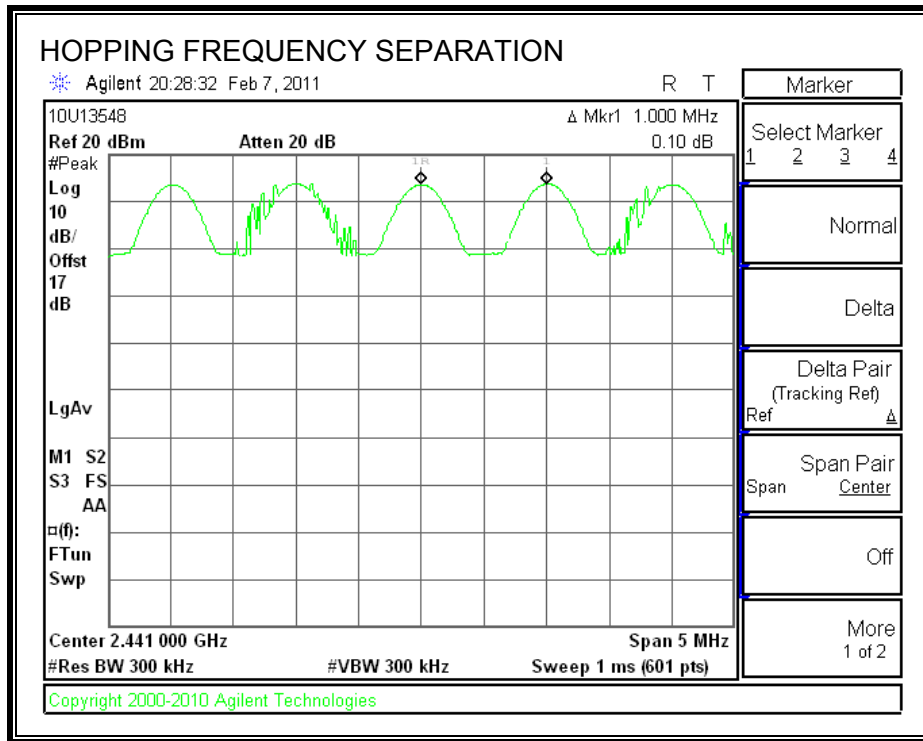

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS


79 Channels observed.

NUMBER OF HOPPING CHANNELS

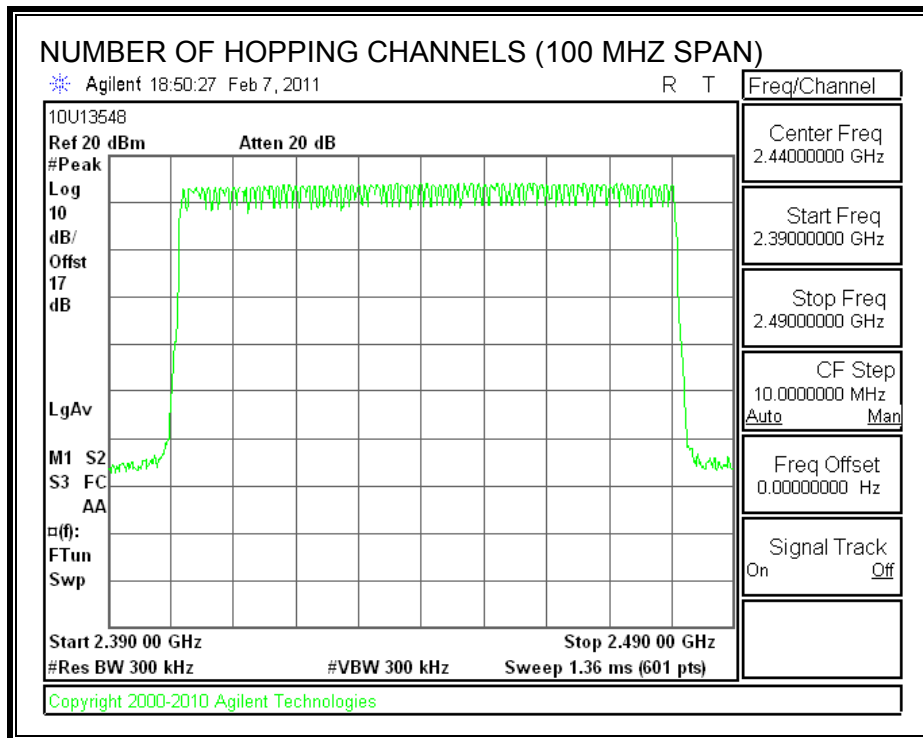

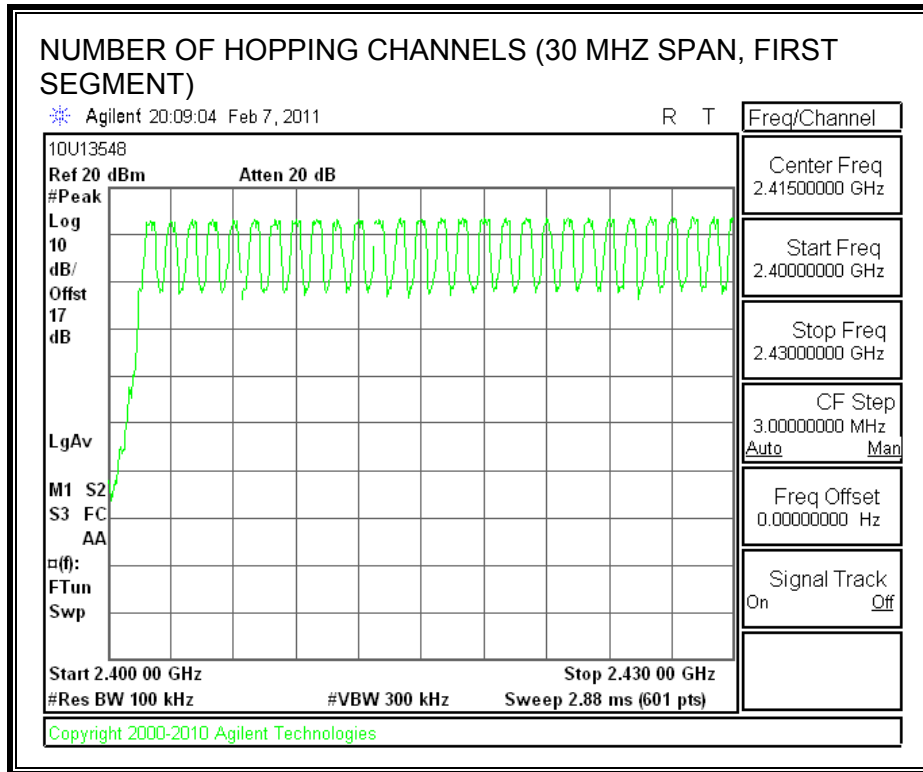

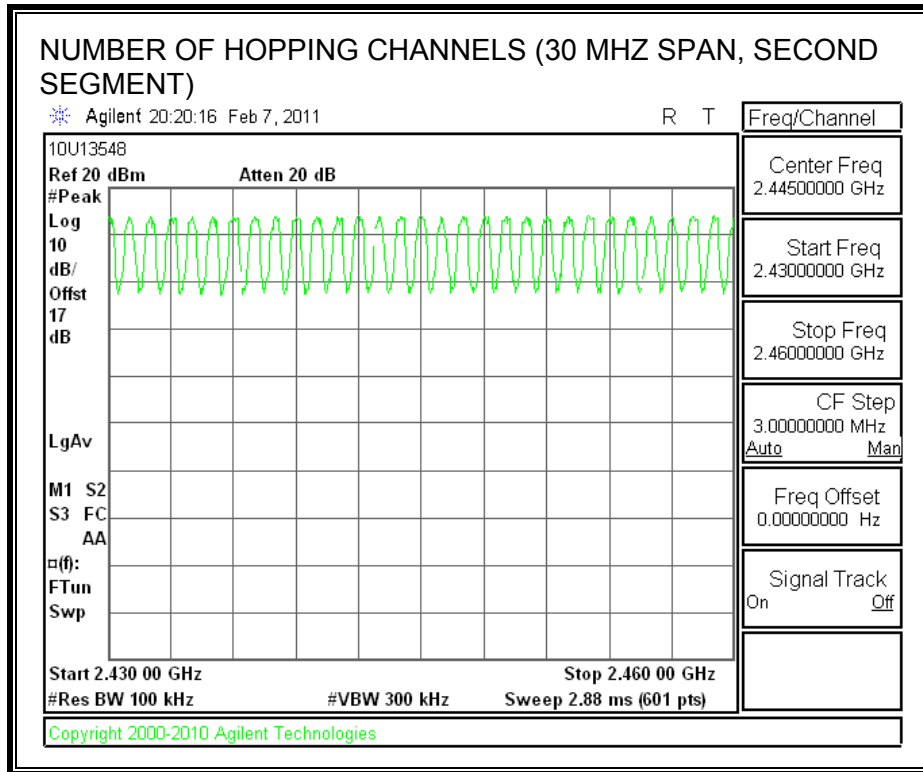

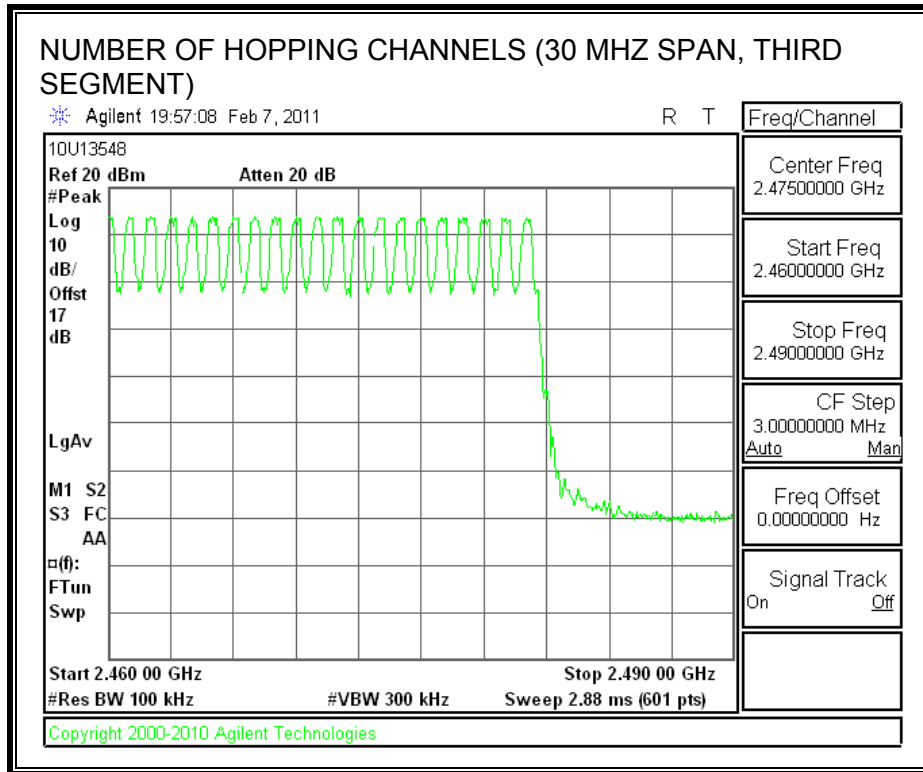

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


RESULTS

Time Of Occupancy = $10 * xx \text{ pulses} * yy \text{ msec} = zz \text{ msec}$


GFSK Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.38	31	0.118	0.4	0.282
DH3	1.635	19	0.311	0.4	0.089
DH5	2.89	10	0.289	0.4	0.111


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

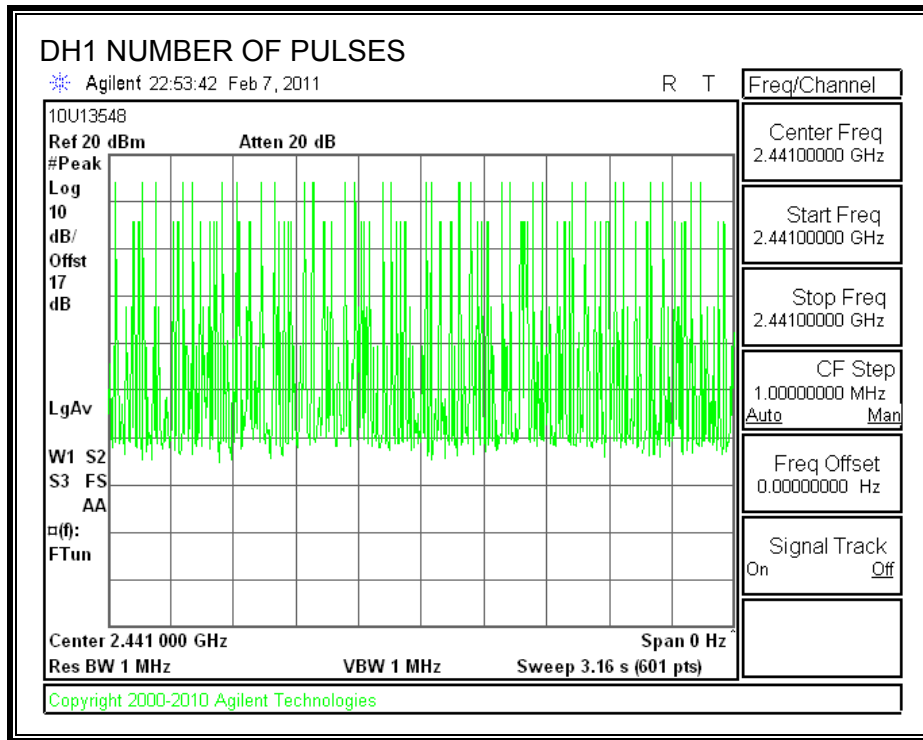


PULSE WIDTH

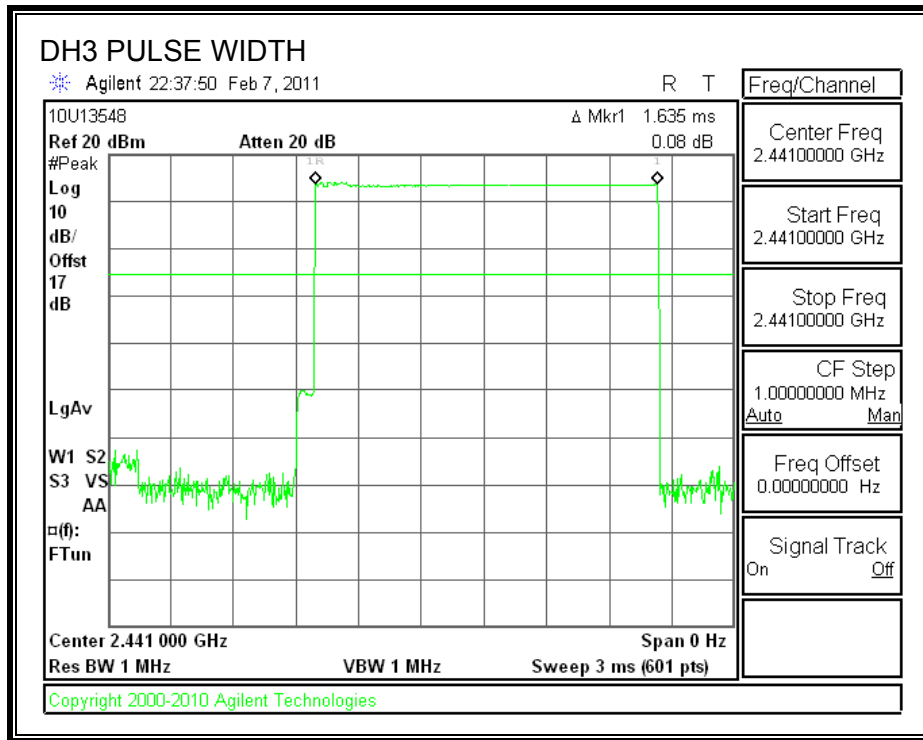


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

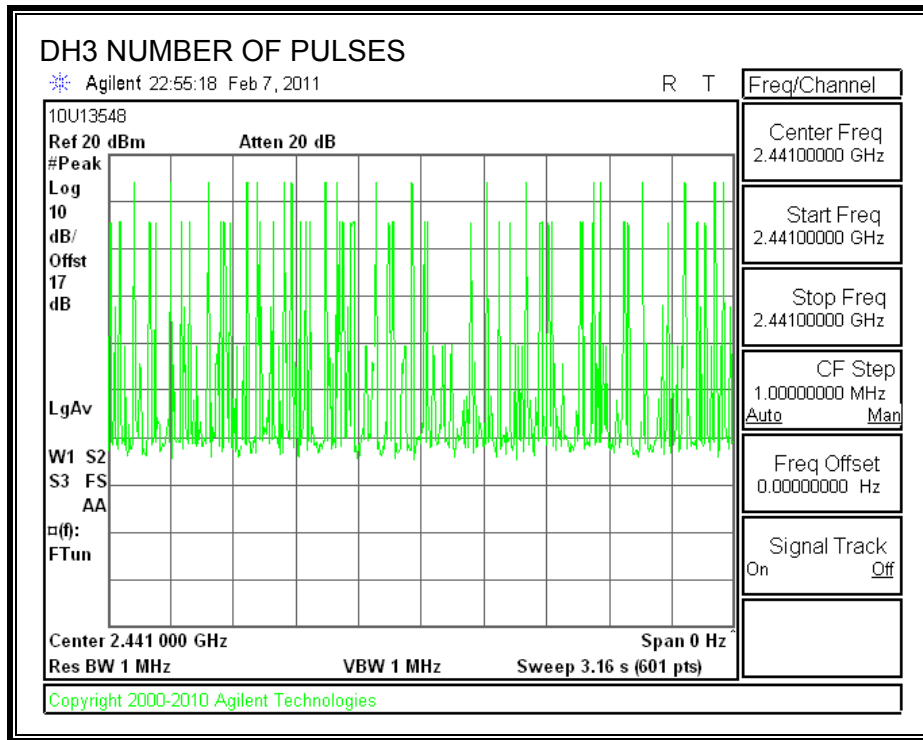

PULSE WIDTH

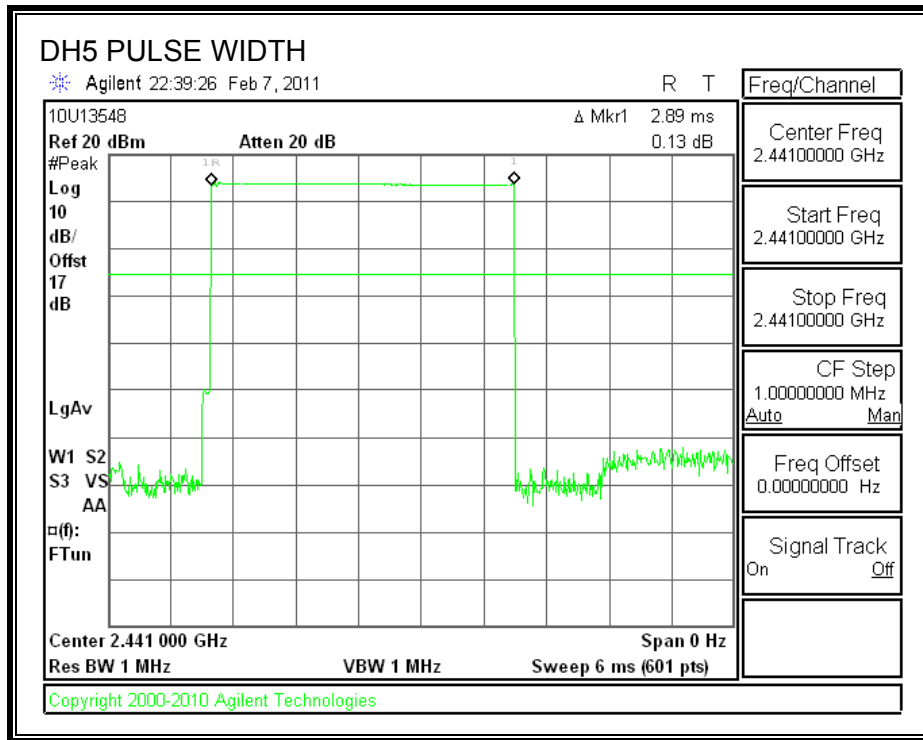

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

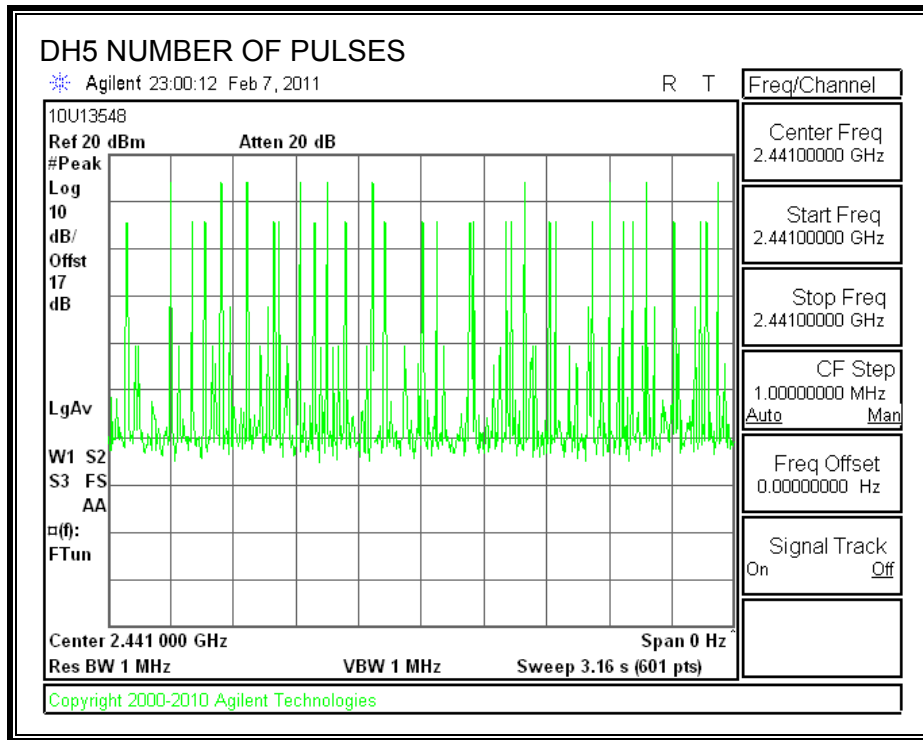

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.70	30	-17.30
Middle	2441	13.94	30	-16.06
High	2480	13.86	30	-16.14

OUTPUT POWER

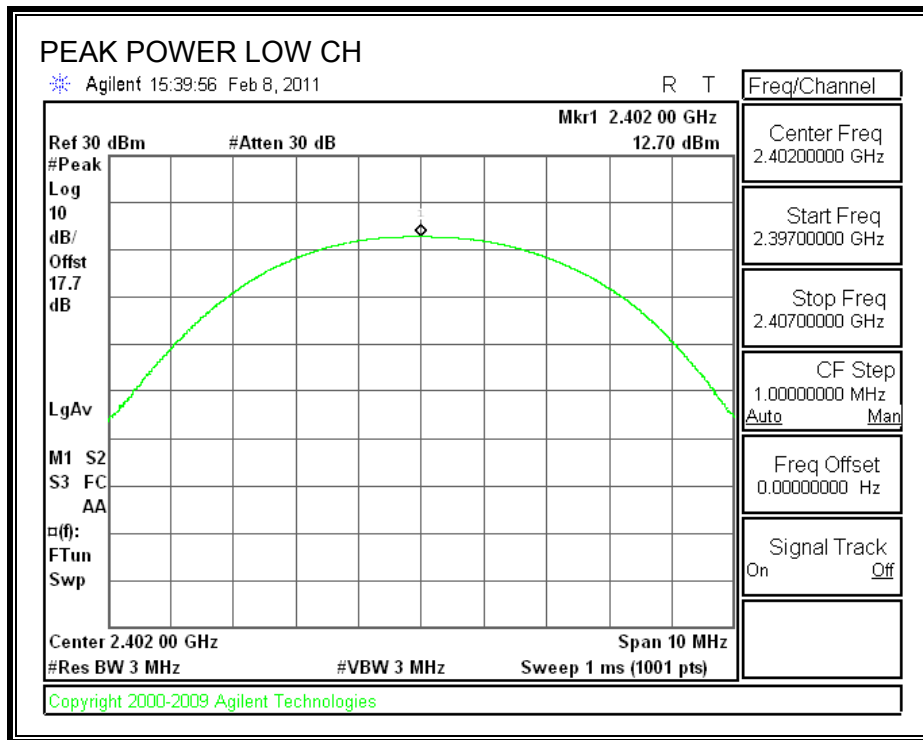

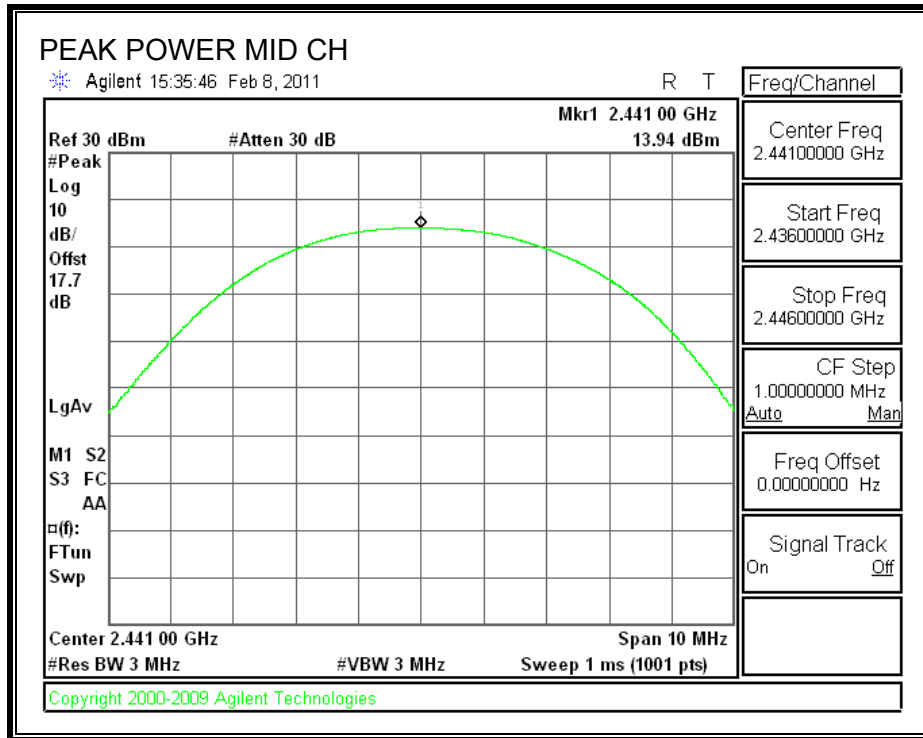

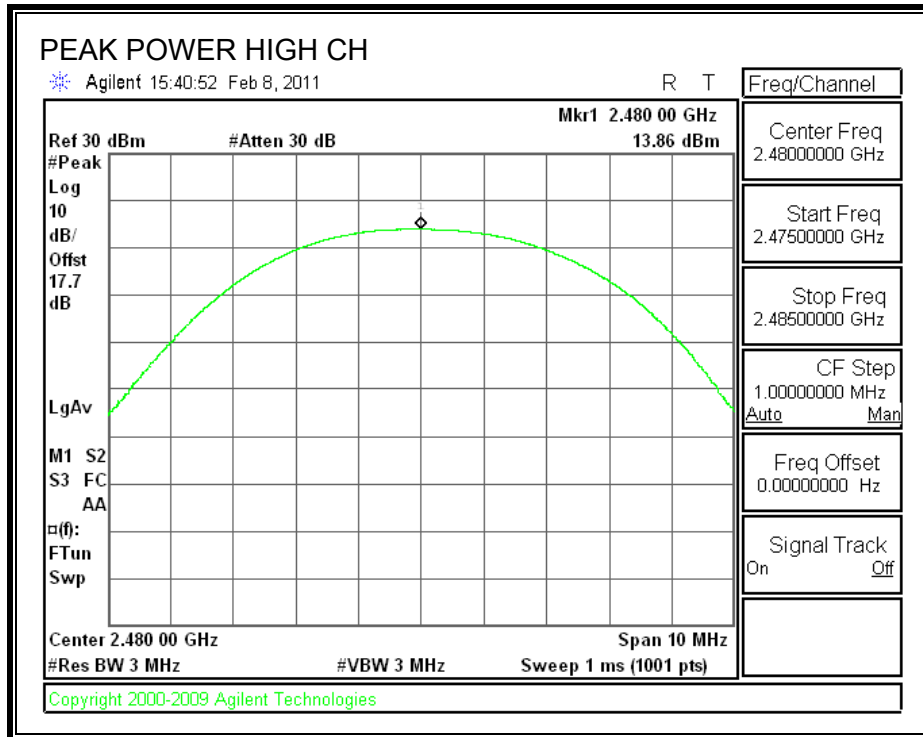

7.1.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

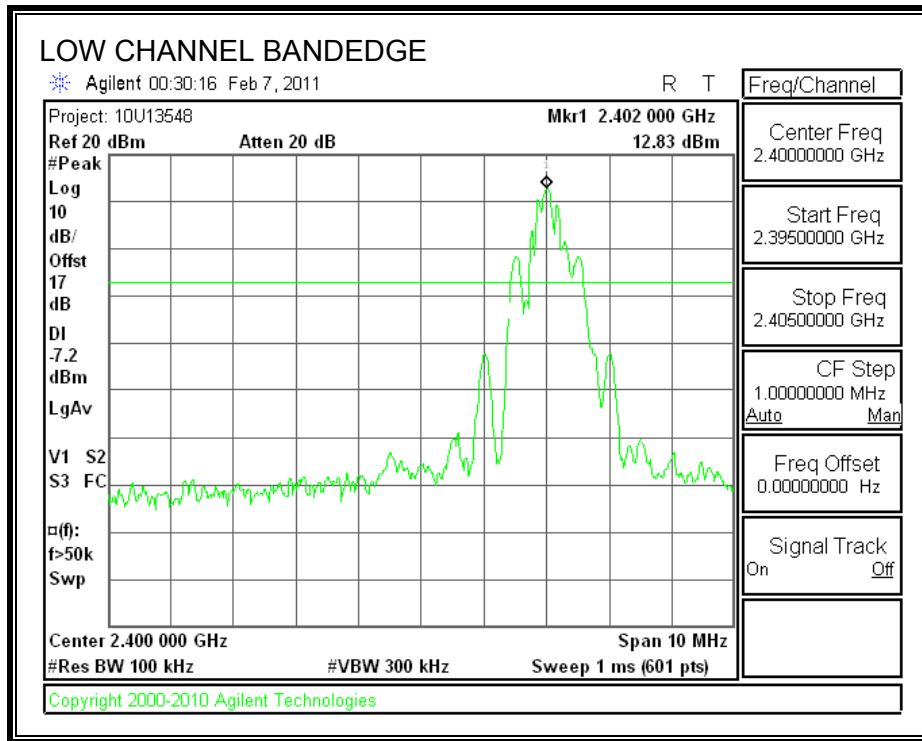

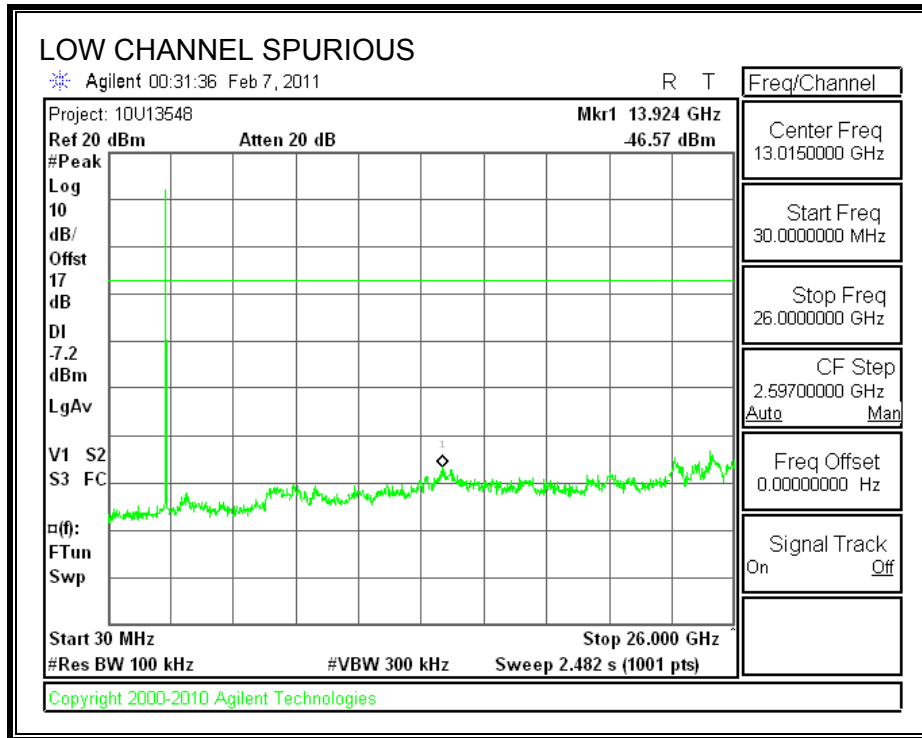



SPURIOUS EMISSIONS, MID CHANNEL

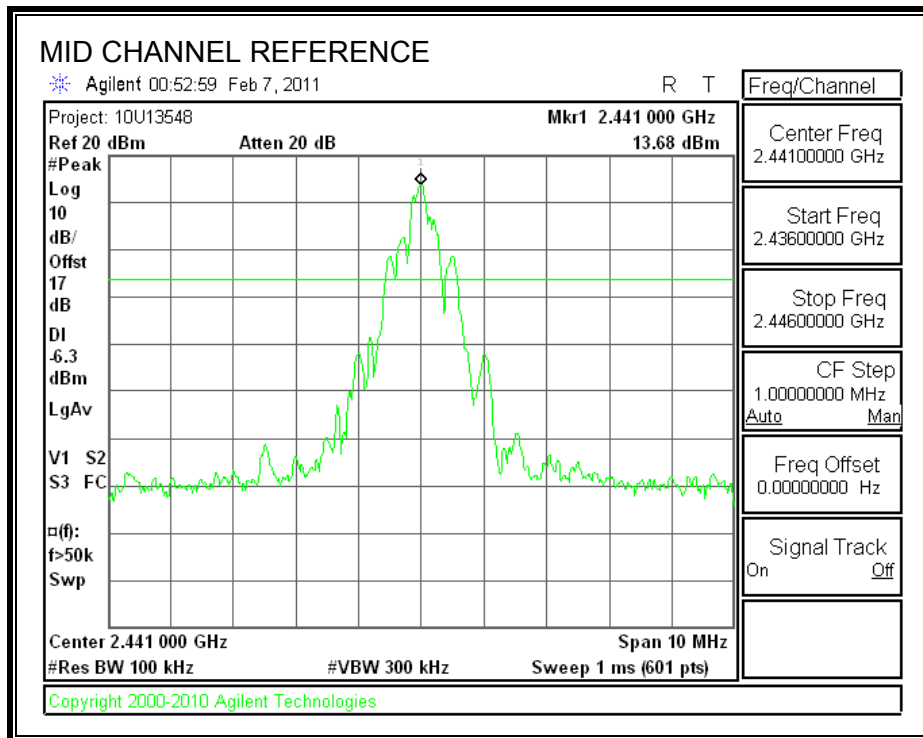

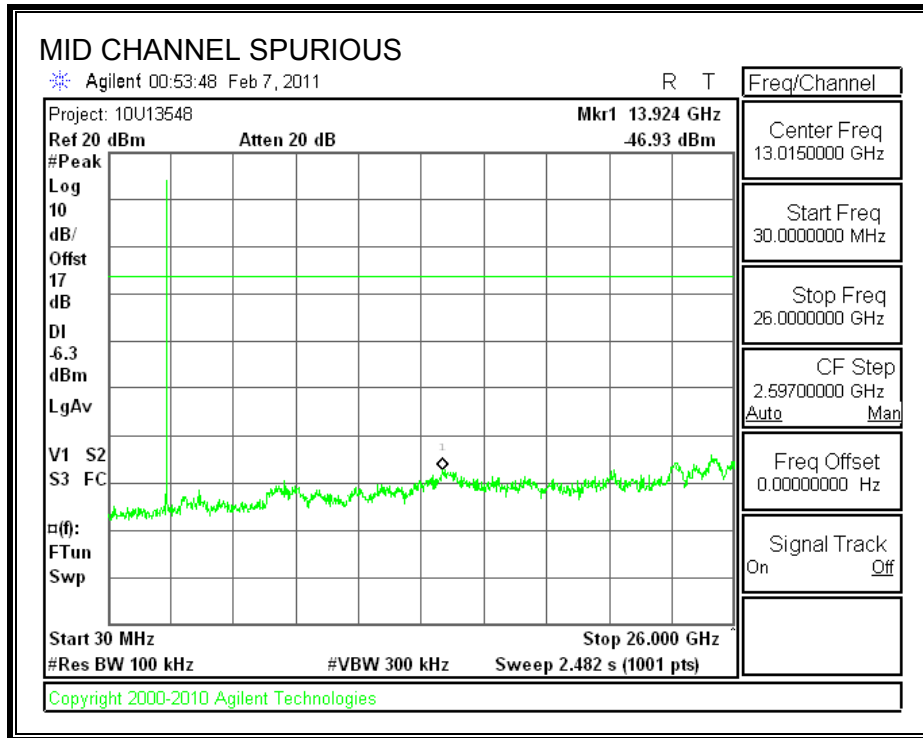



SPURIOUS EMISSIONS, HIGH CHANNEL

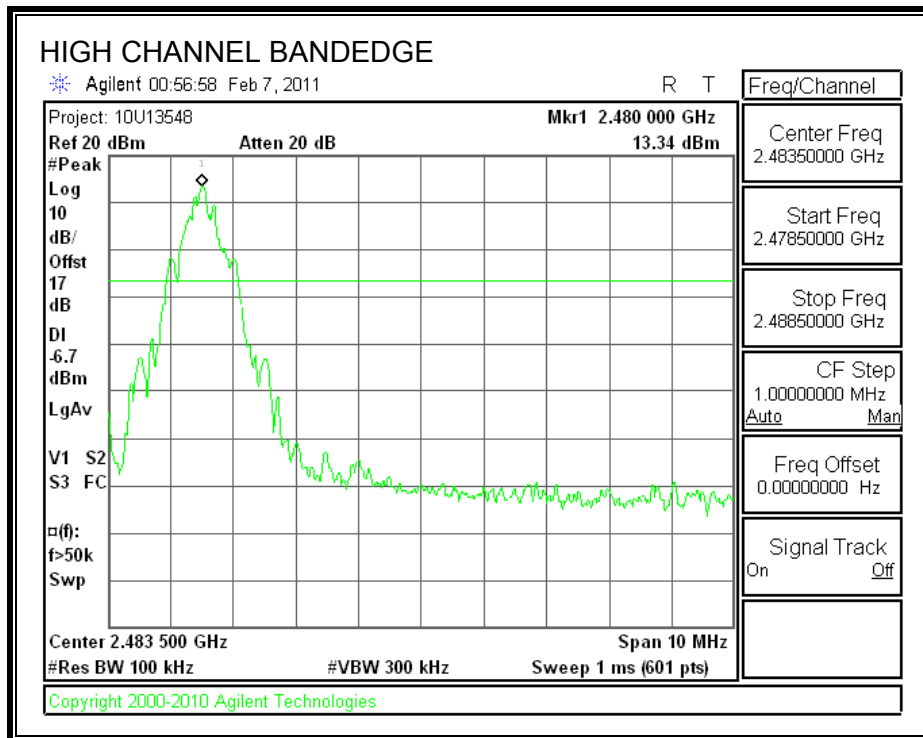

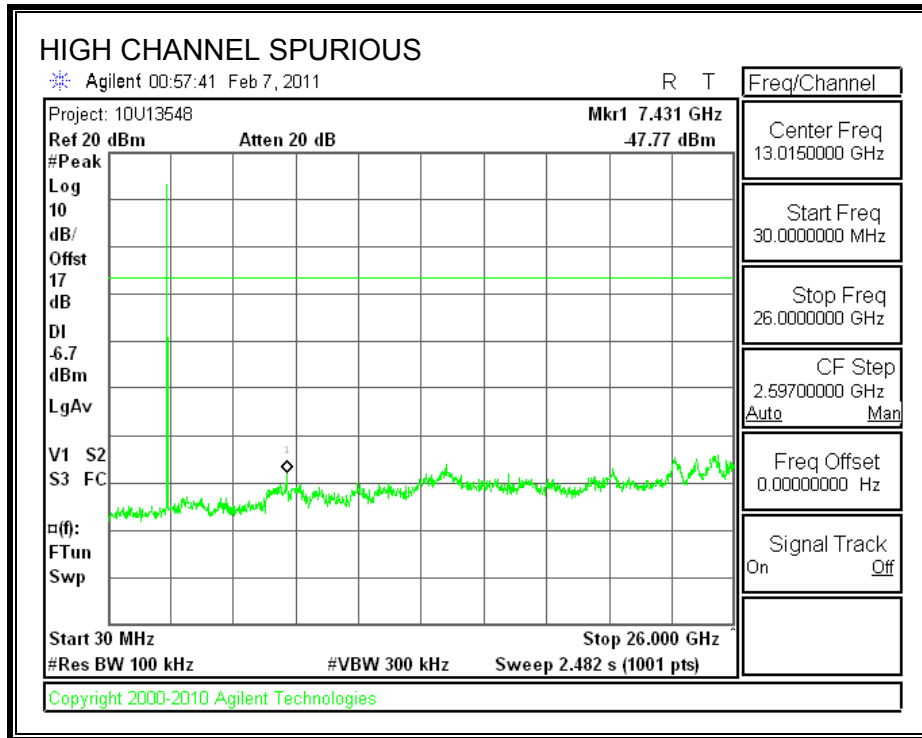

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

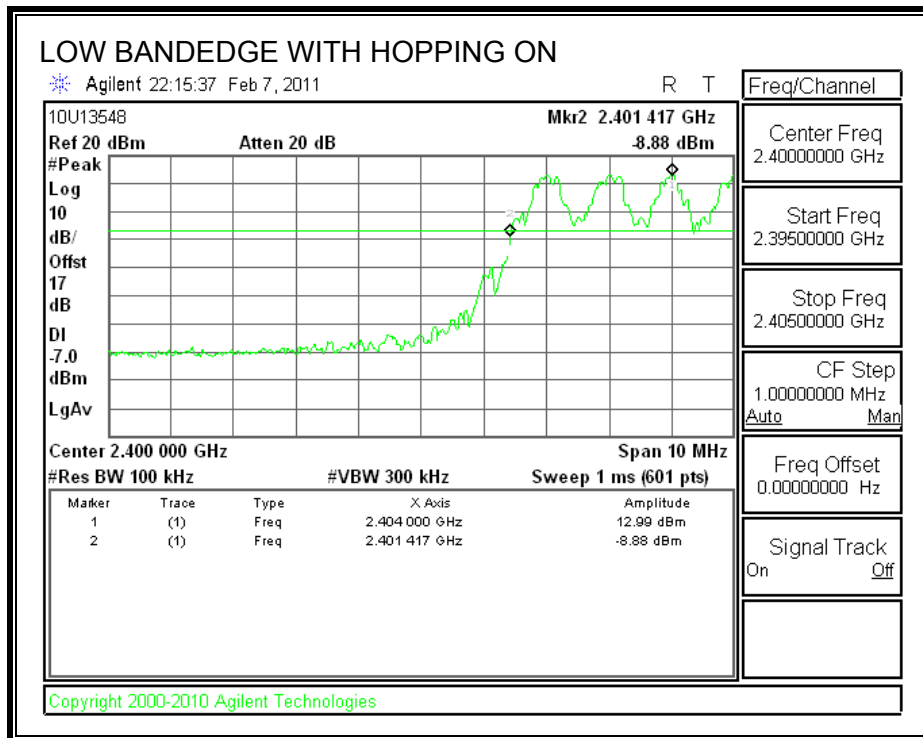

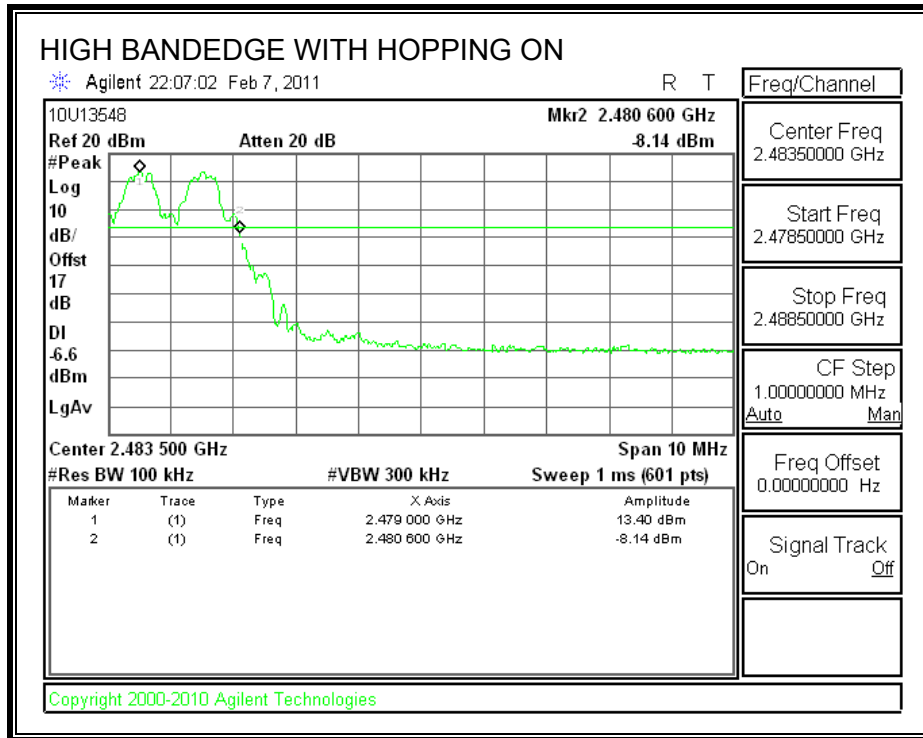

7.2. ENHANCED DATA RATE 8PSK MODULATION

7.2.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	1179	1077.3
Middle	2441	1184	1100.9
High	2480	1180	1108.3


20 dB BANDWIDTH

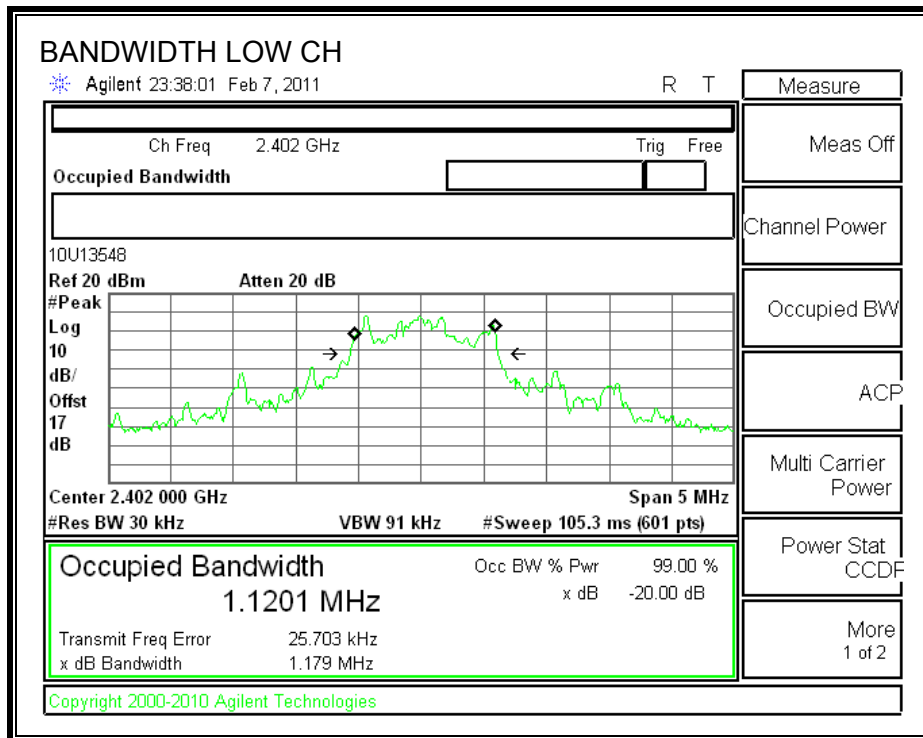


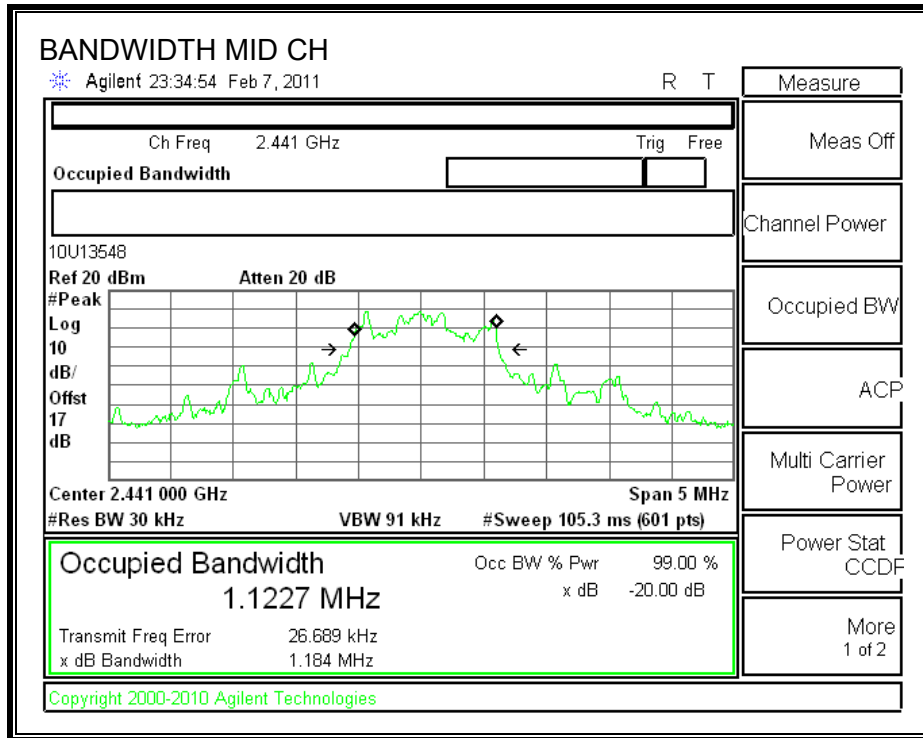


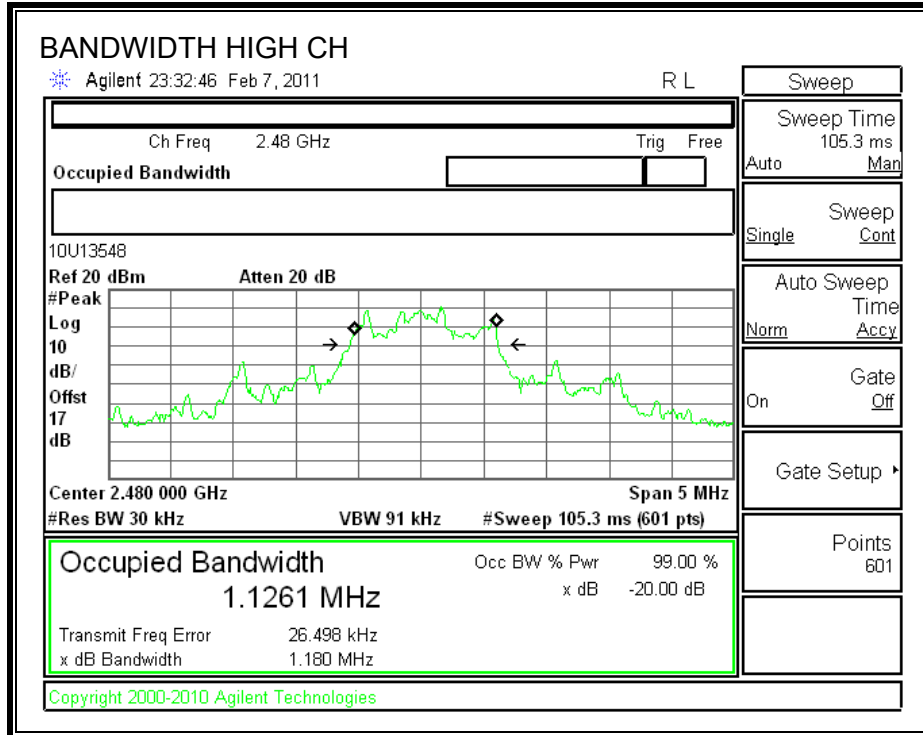

99% BANDWIDTH

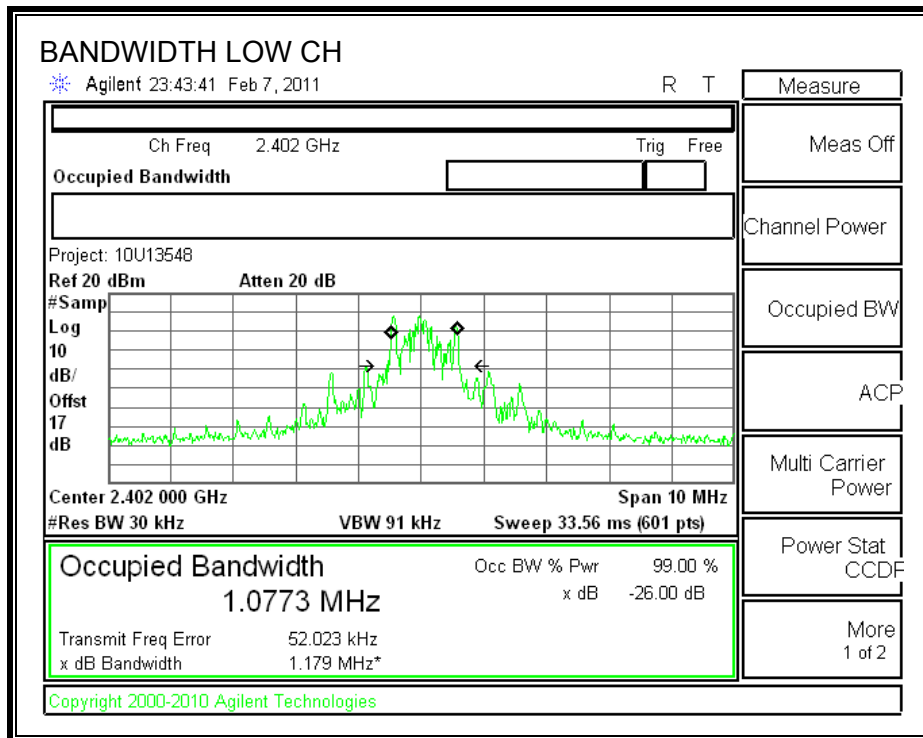

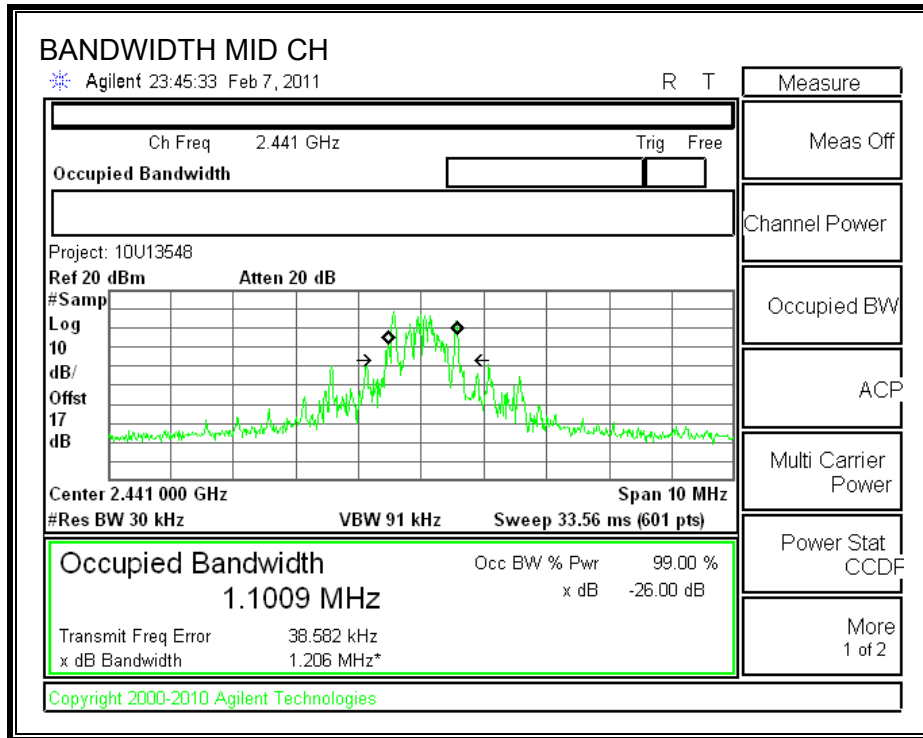

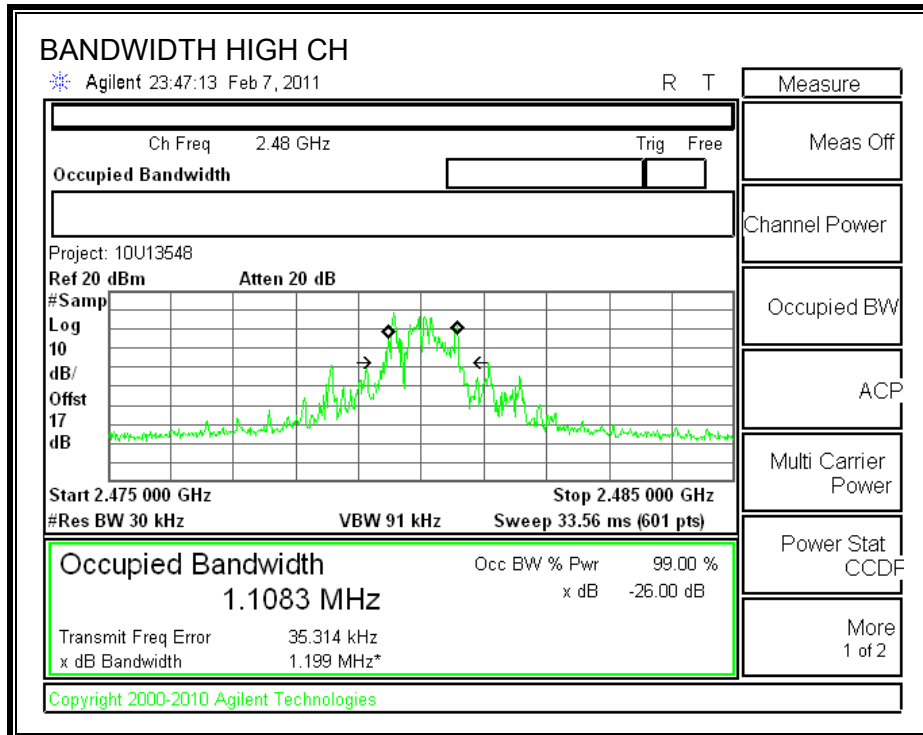

7.2.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

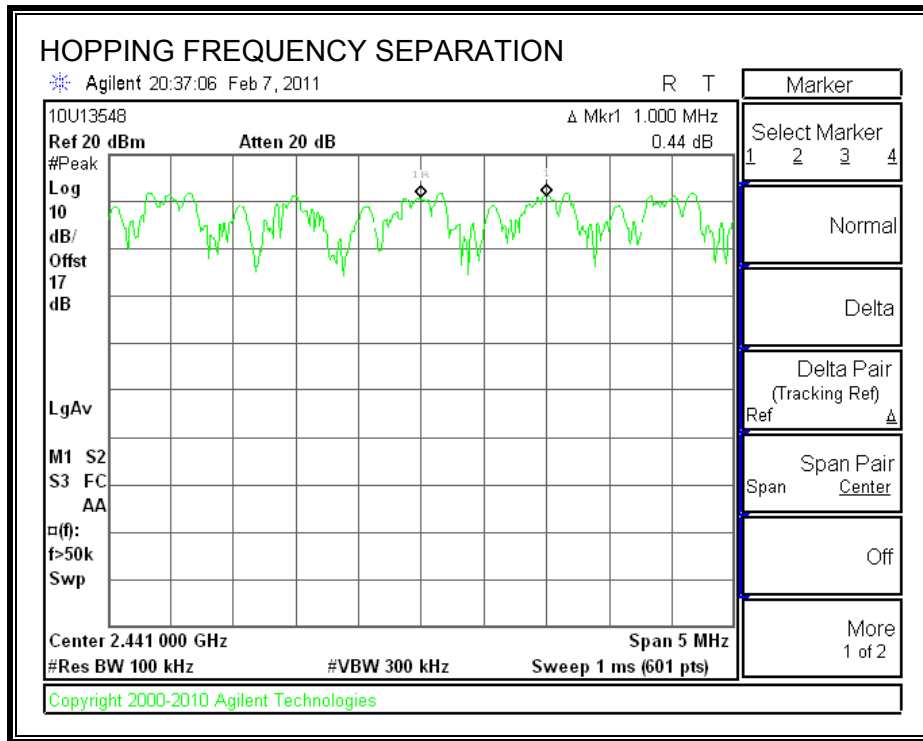

7.2.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS


79 Channels observed.

NUMBER OF HOPPING CHANNELS

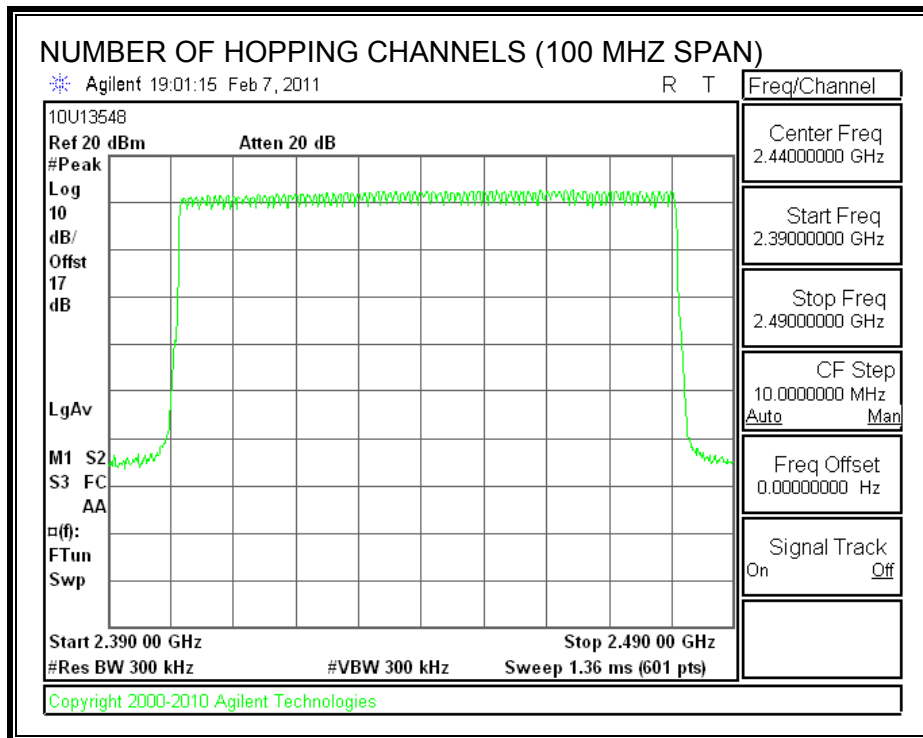

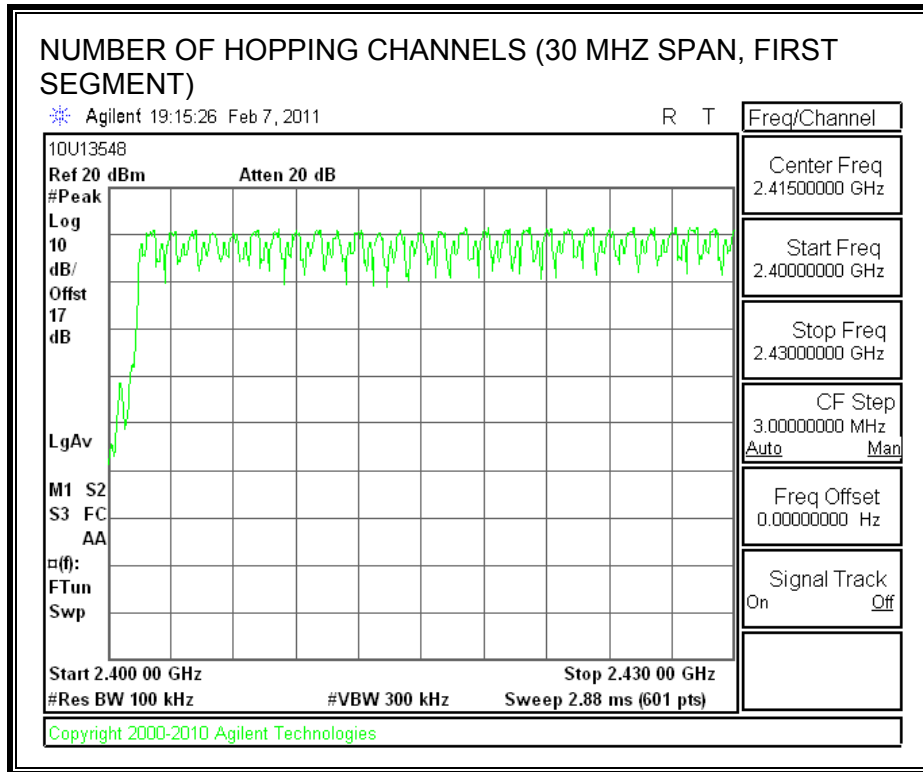

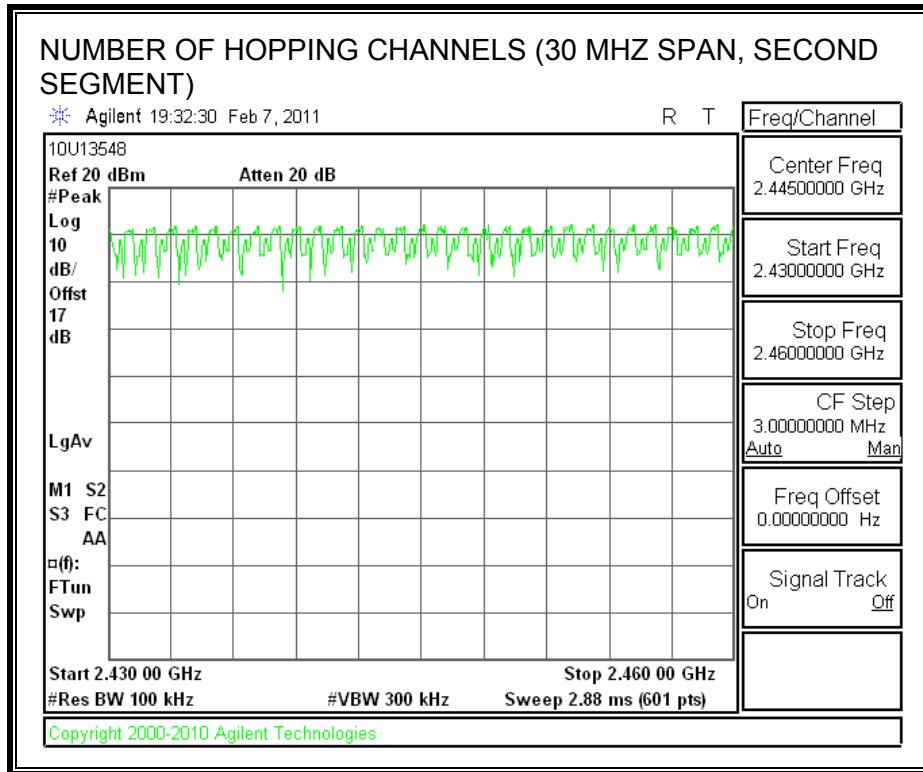

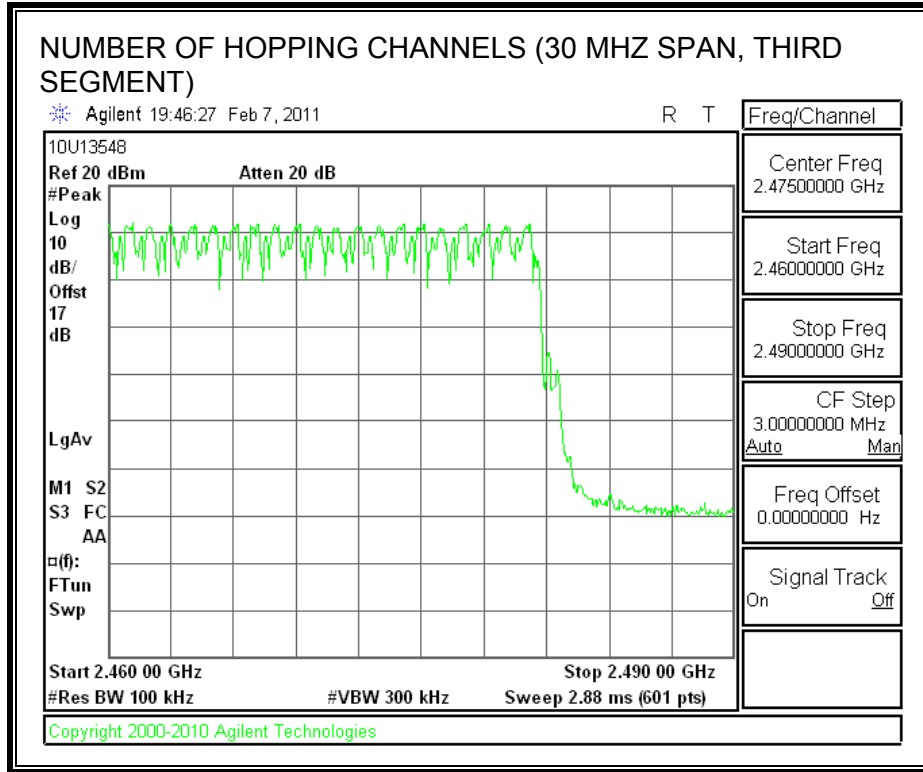

7.2.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


RESULTS

Time Of Occupancy = $10 * xx \text{ pulses} * yy \text{ msec} = zz \text{ msec}$


8PSK Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
3DH1	0.385	31	0.119	0.4	-0.281
3DH3	1.64	16	0.262	0.4	-0.138
3DH5	2.89	13	0.376	0.4	-0.024


PULSE WIDTH

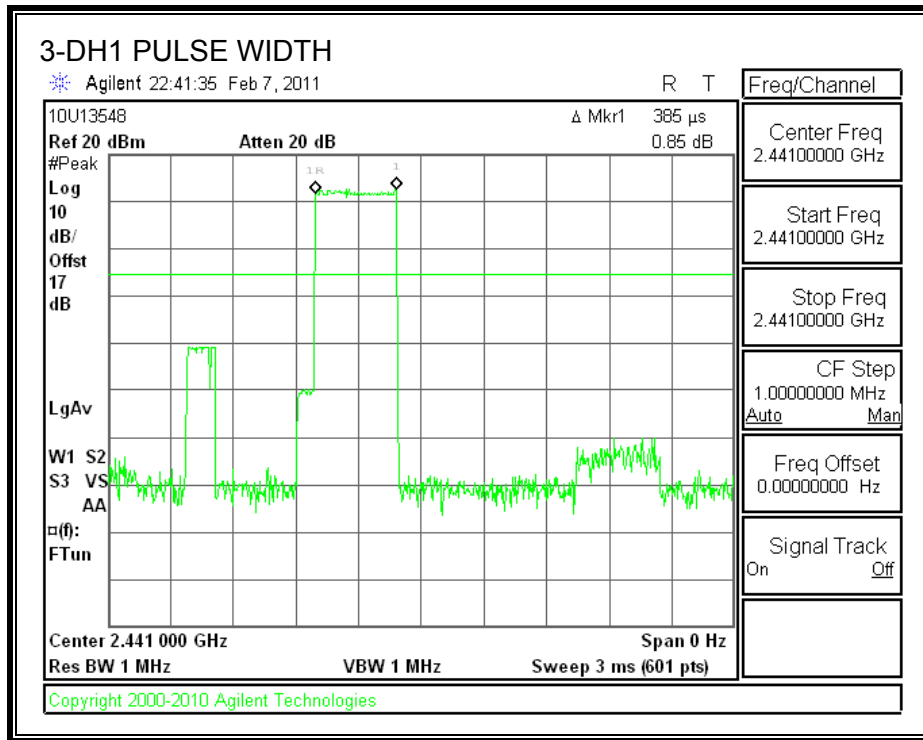


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

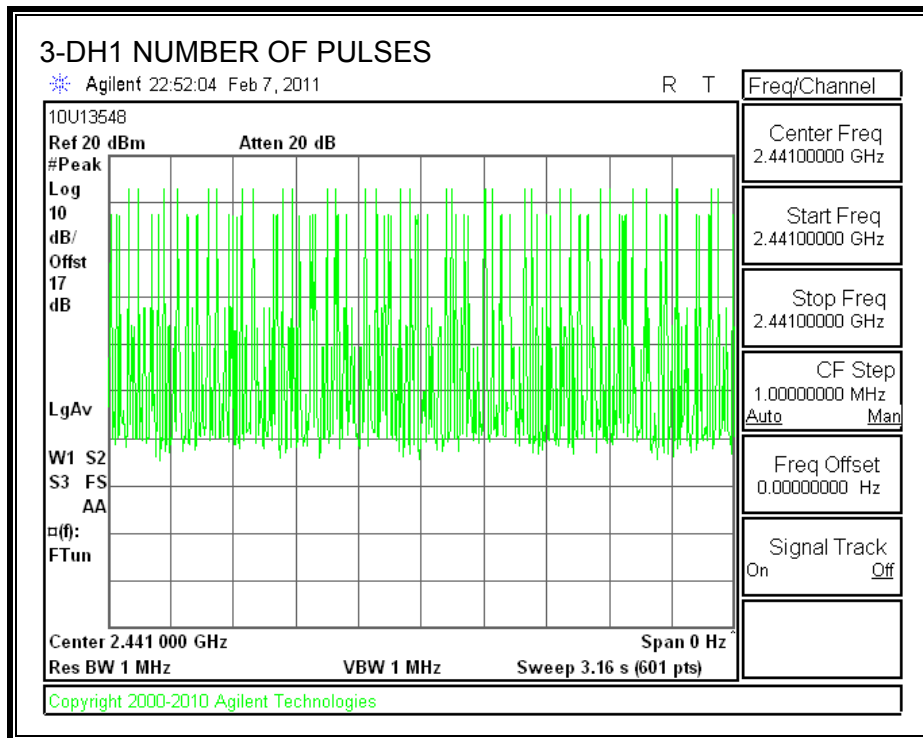


PULSE WIDTH

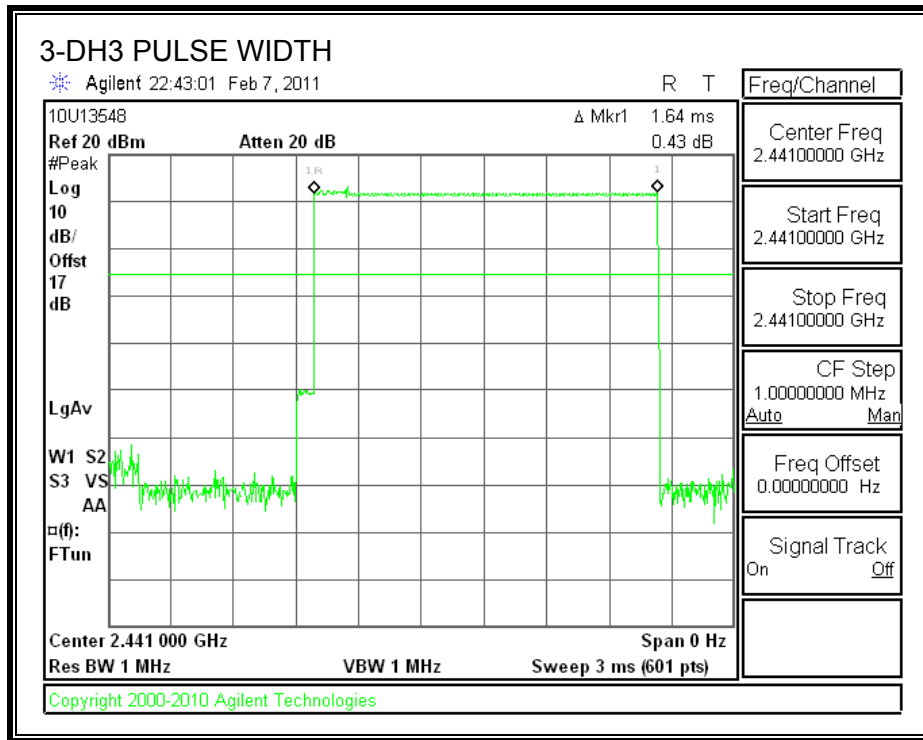


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

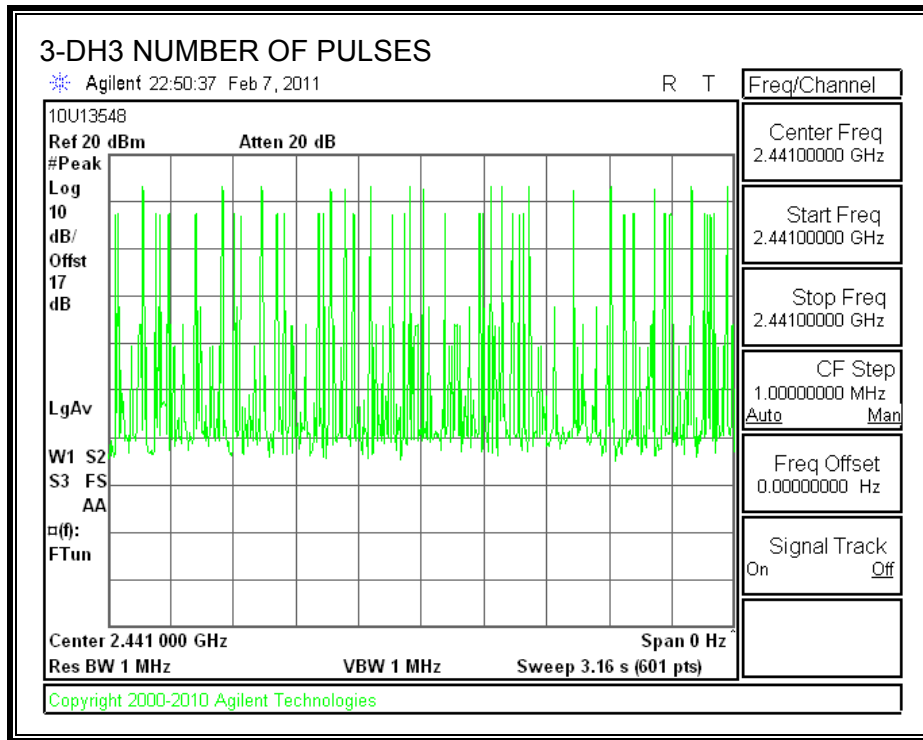

PULSE WIDTH

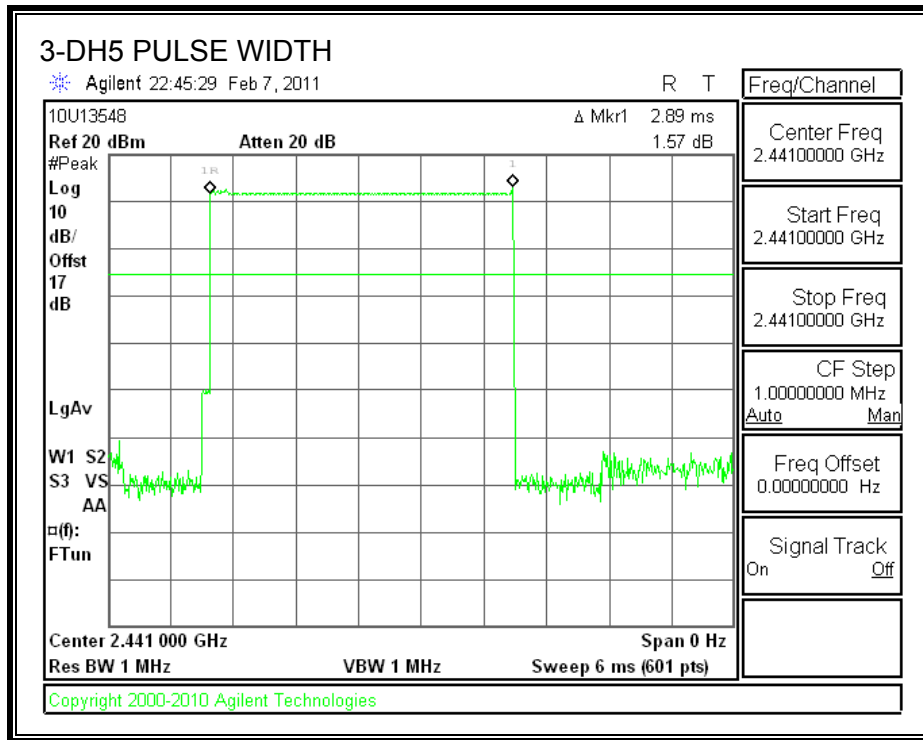

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

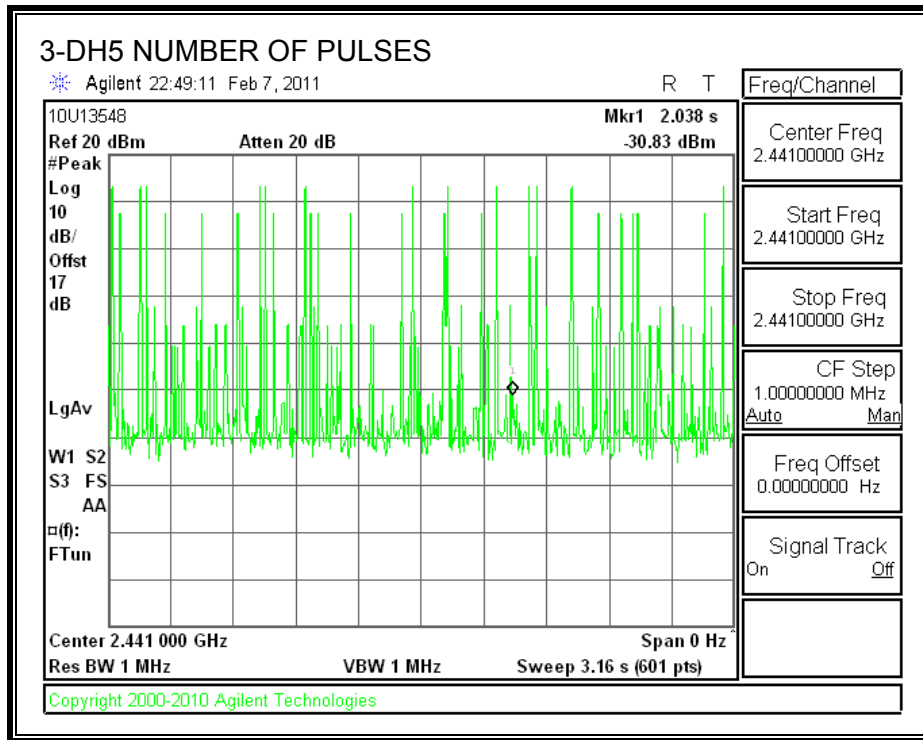

7.2.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.92	30	-17.08
Middle	2441	13.80	30	-16.20
High	2480	13.62	30	-16.38

OUTPUT POWER

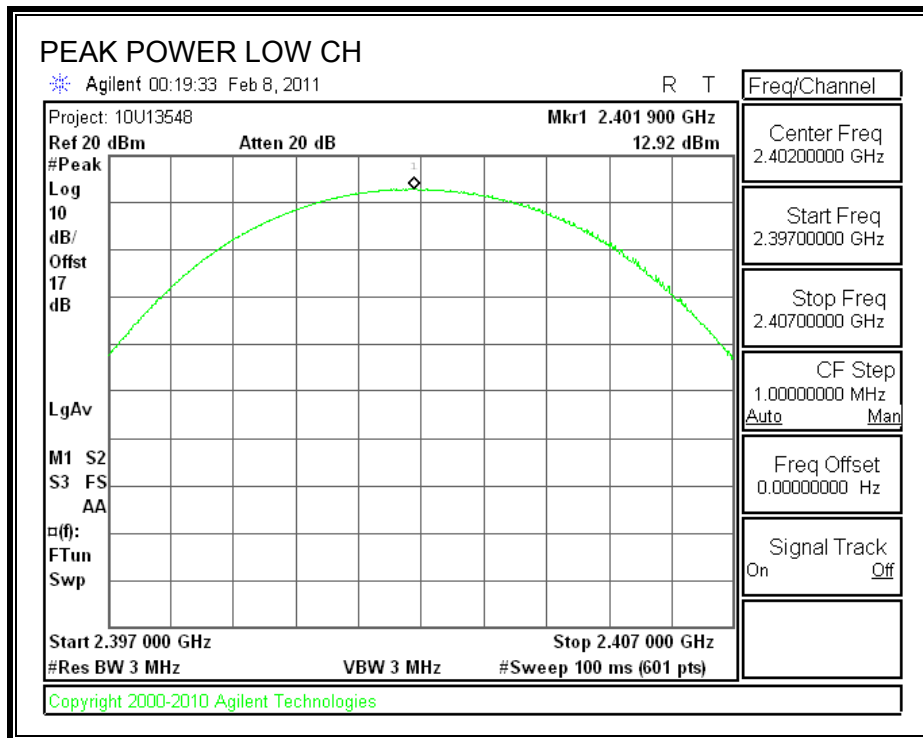

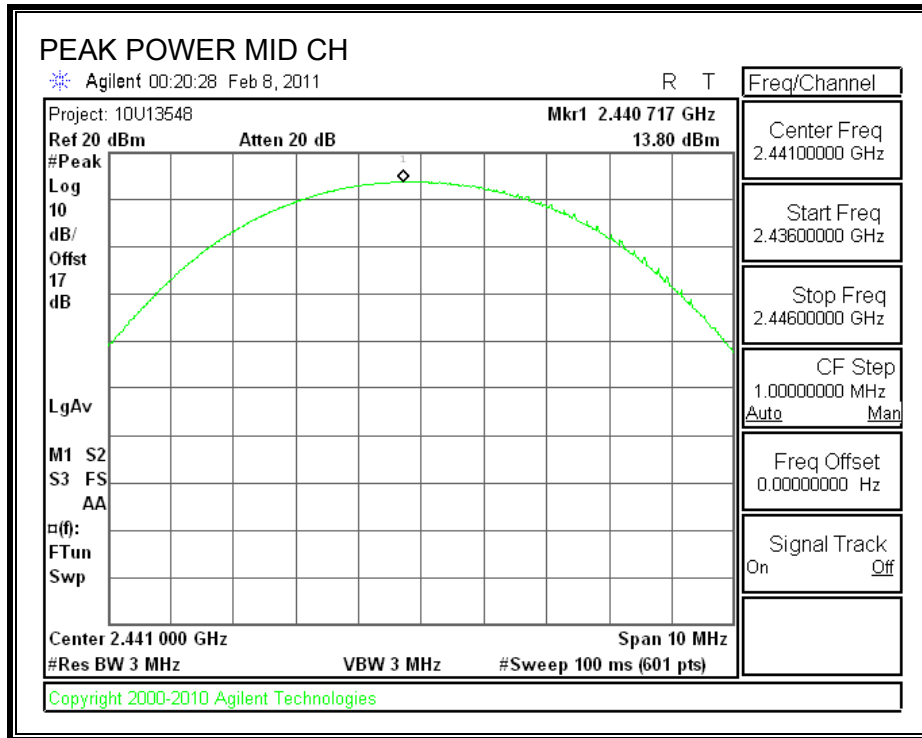

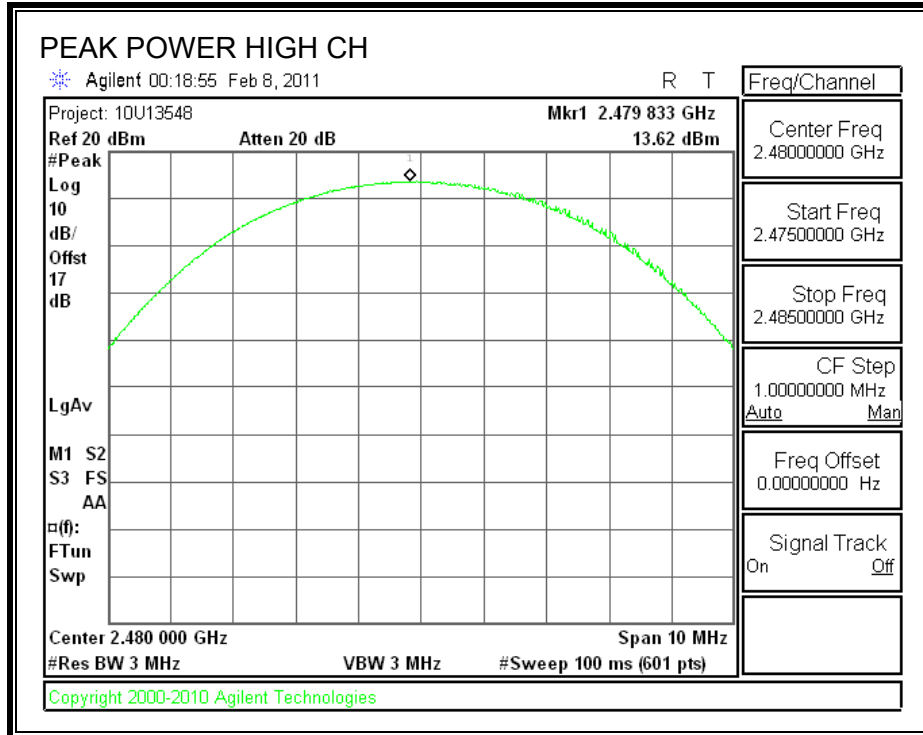

7.2.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

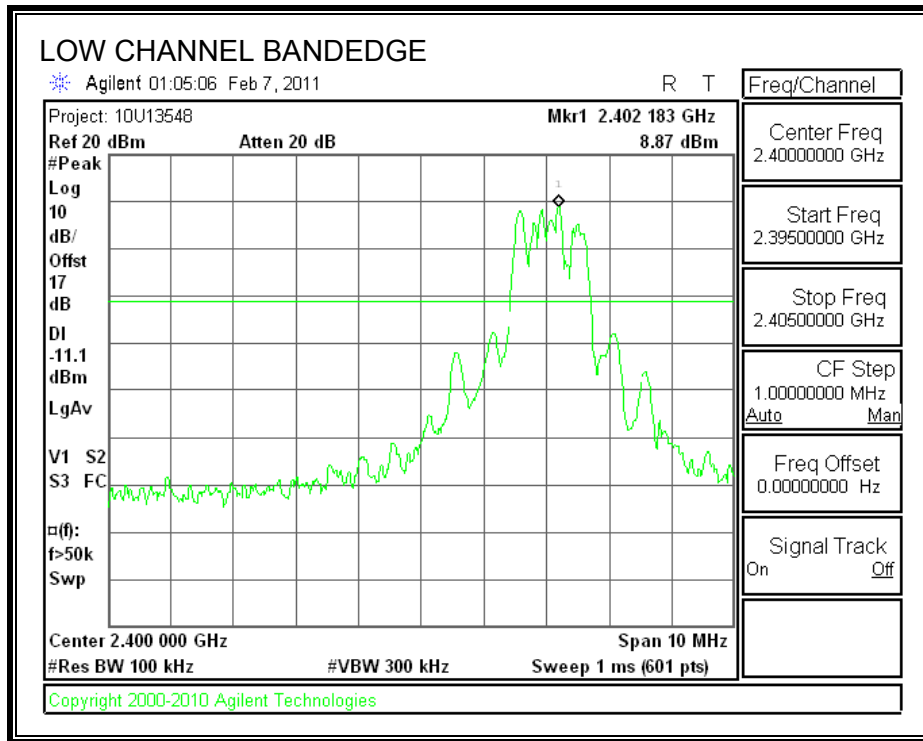

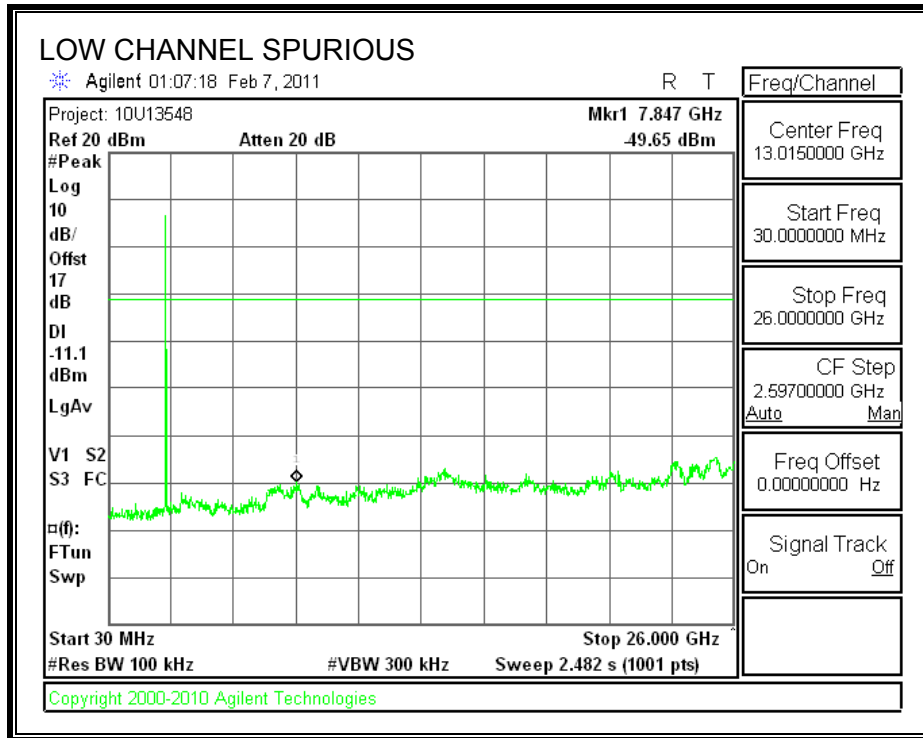



SPURIOUS EMISSIONS, MID CHANNEL

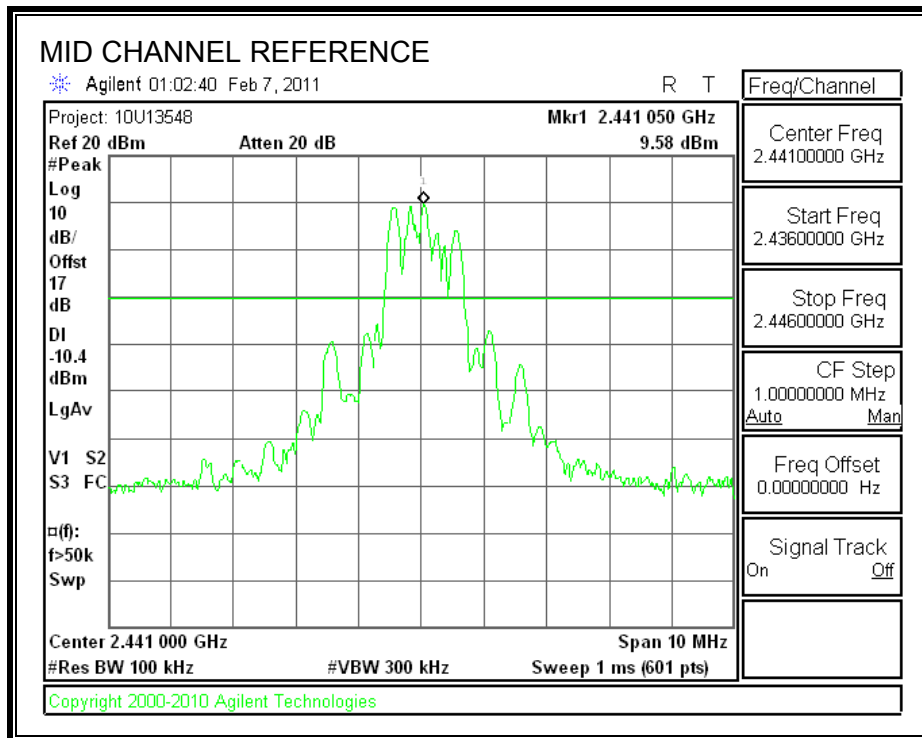

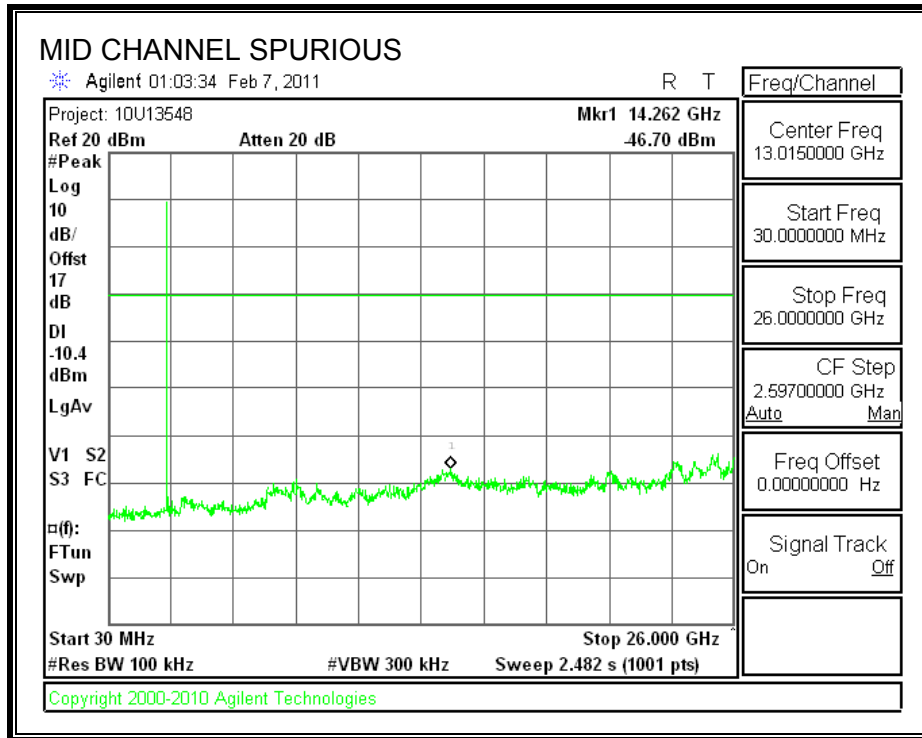



SPURIOUS EMISSIONS, HIGH CHANNEL

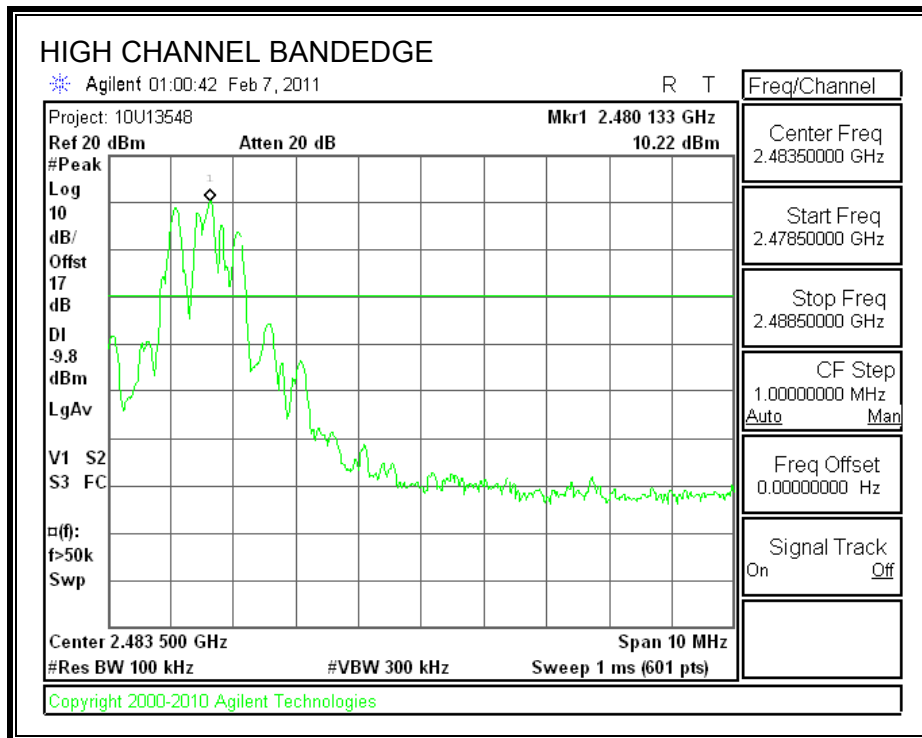

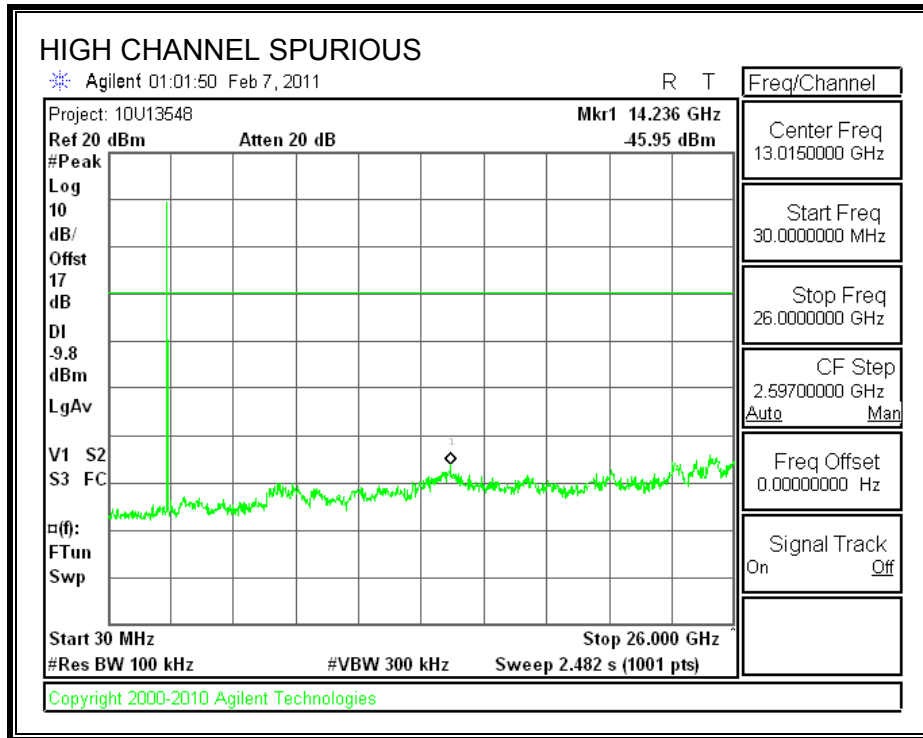

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

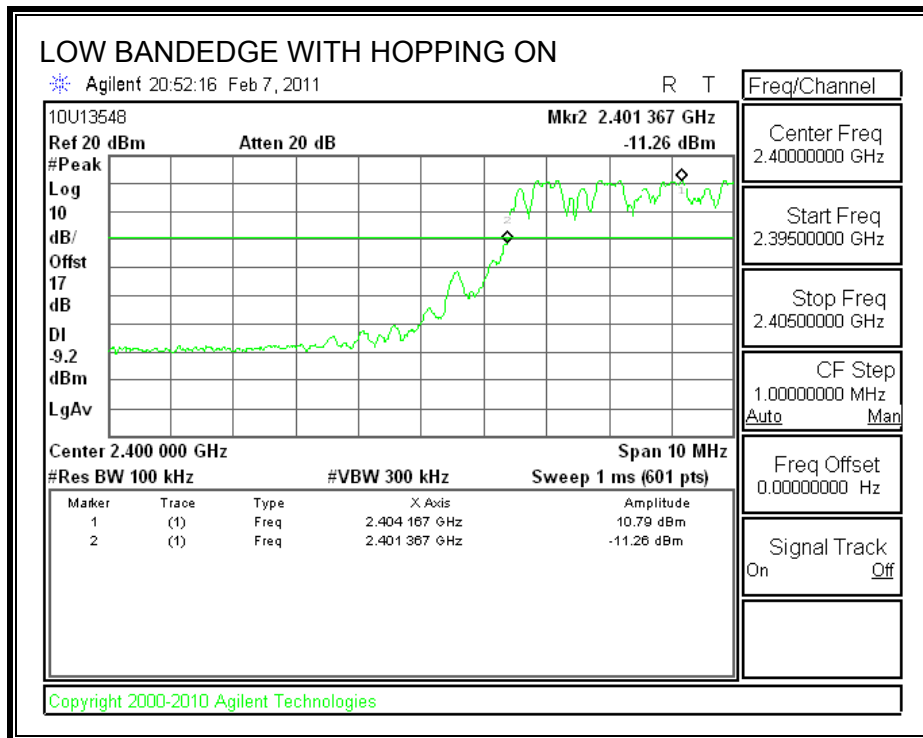

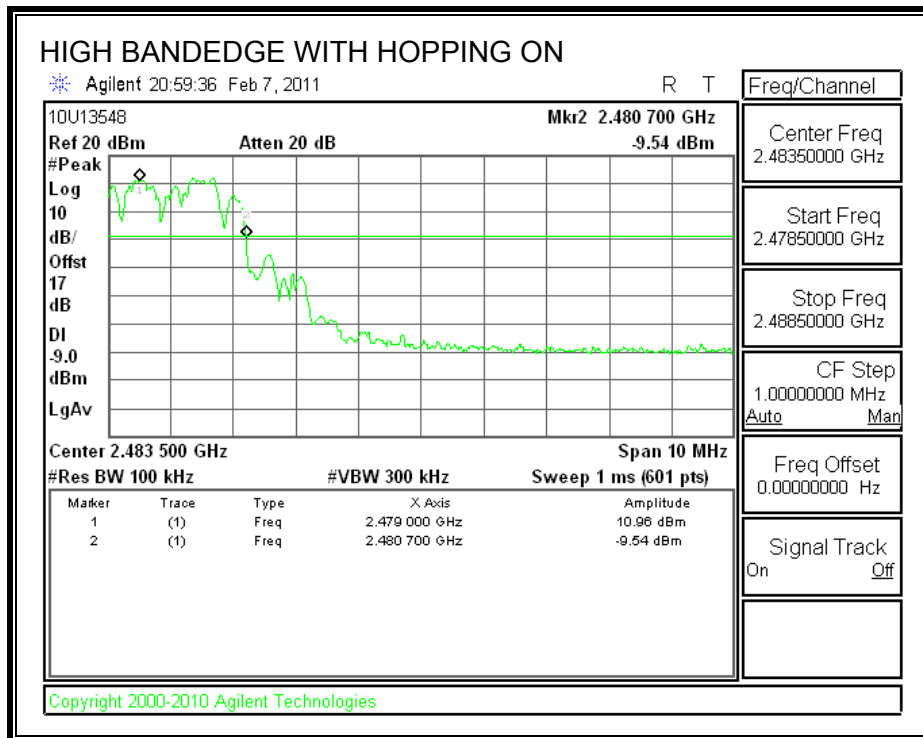

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz


8.2.1. BASIC DATA RATE GFSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

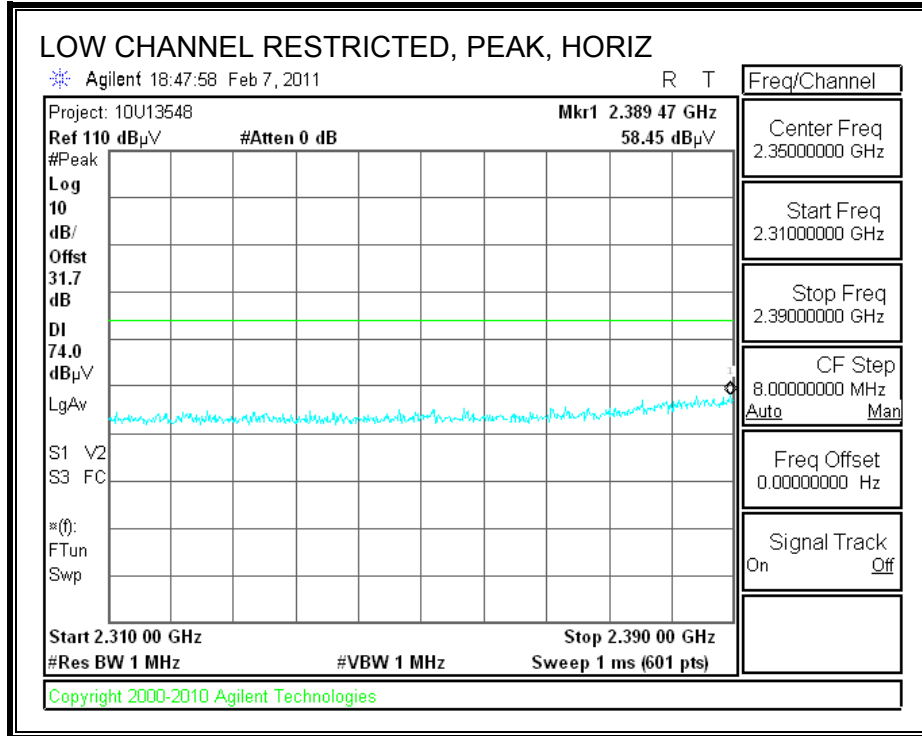

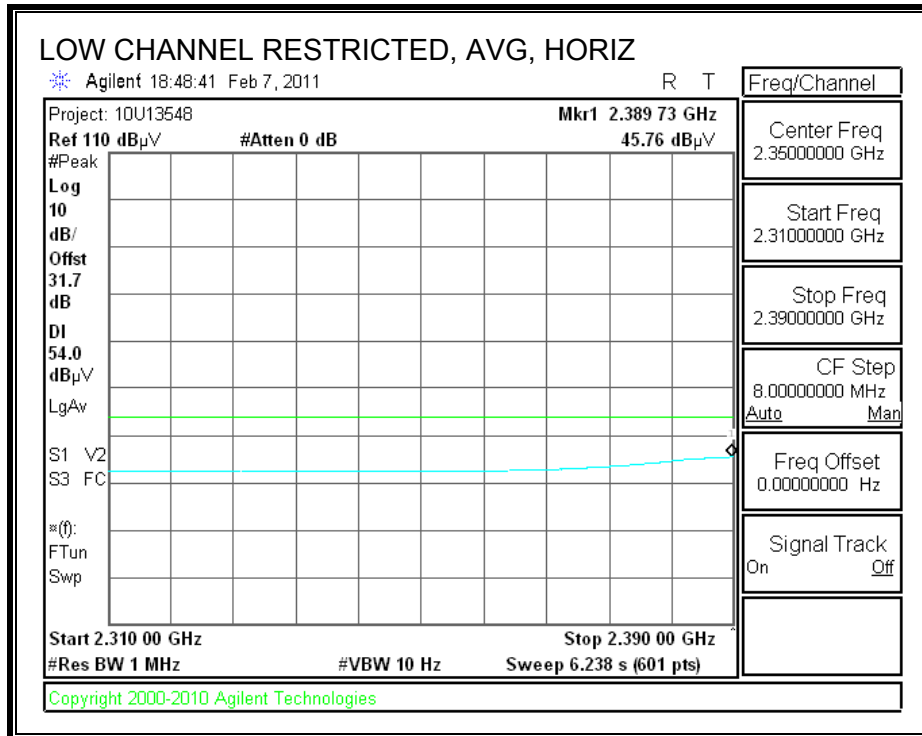



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

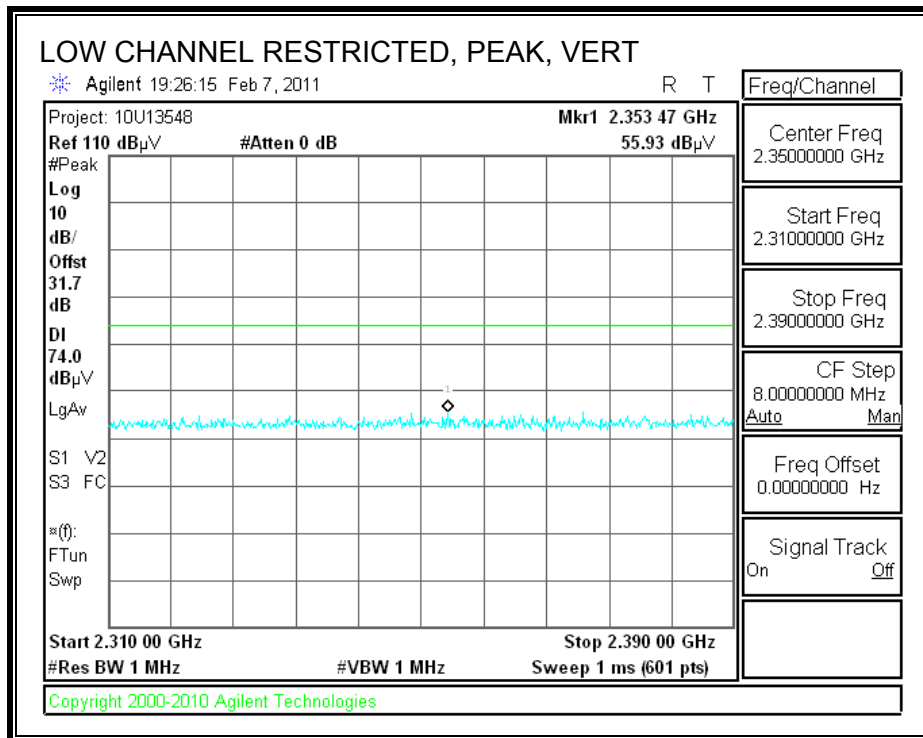

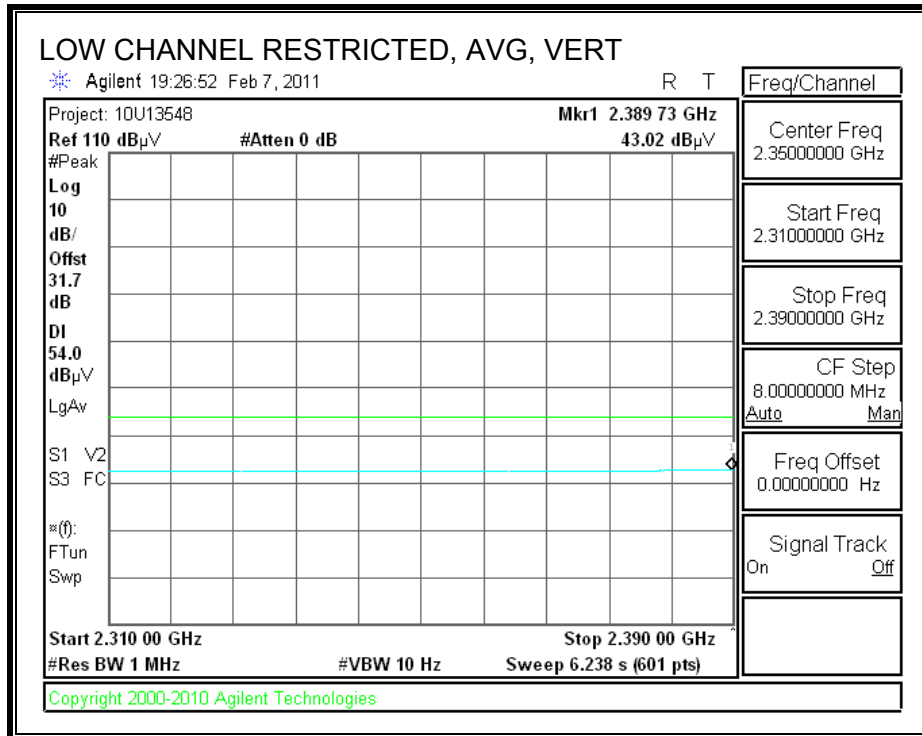



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

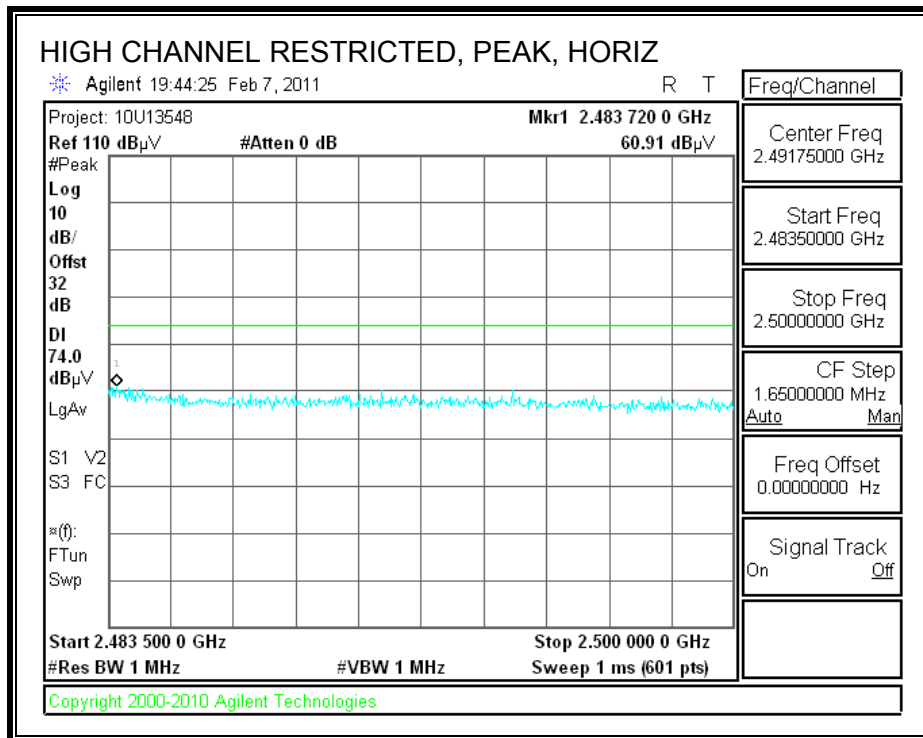

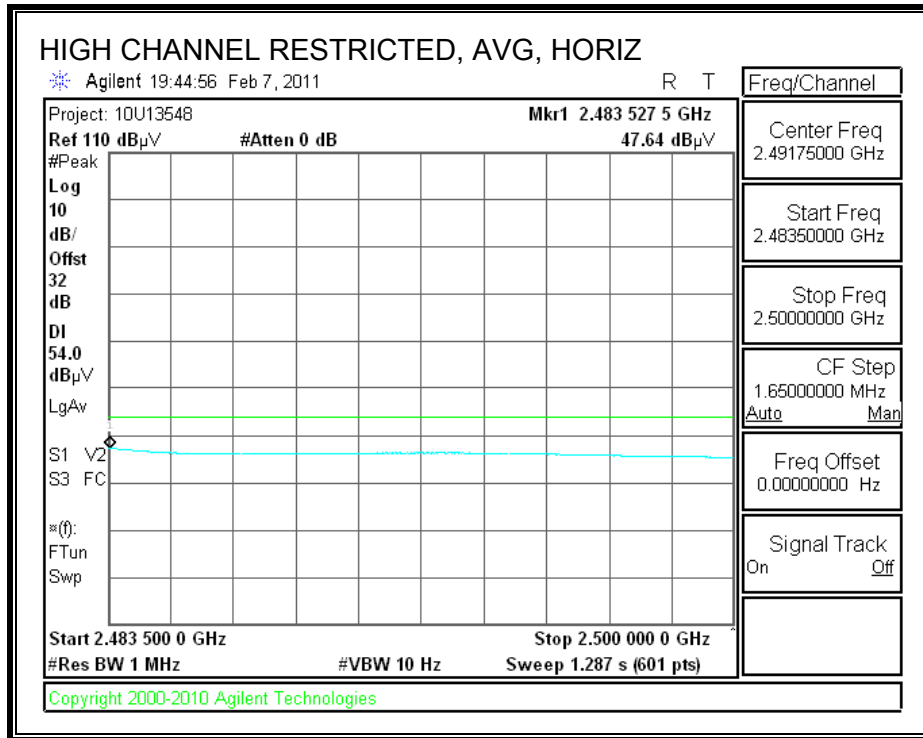

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

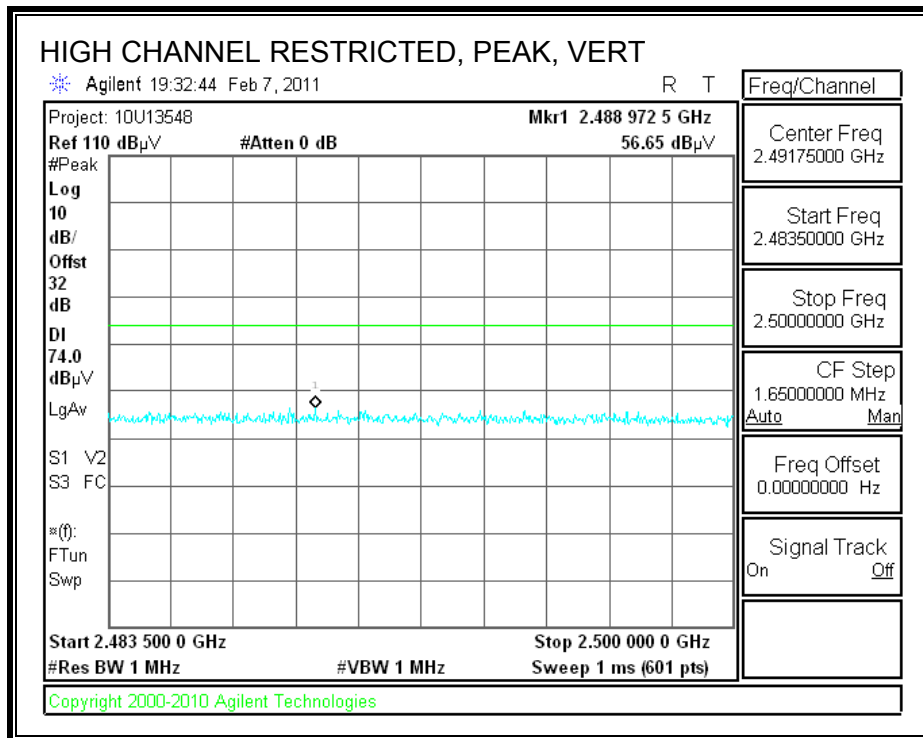

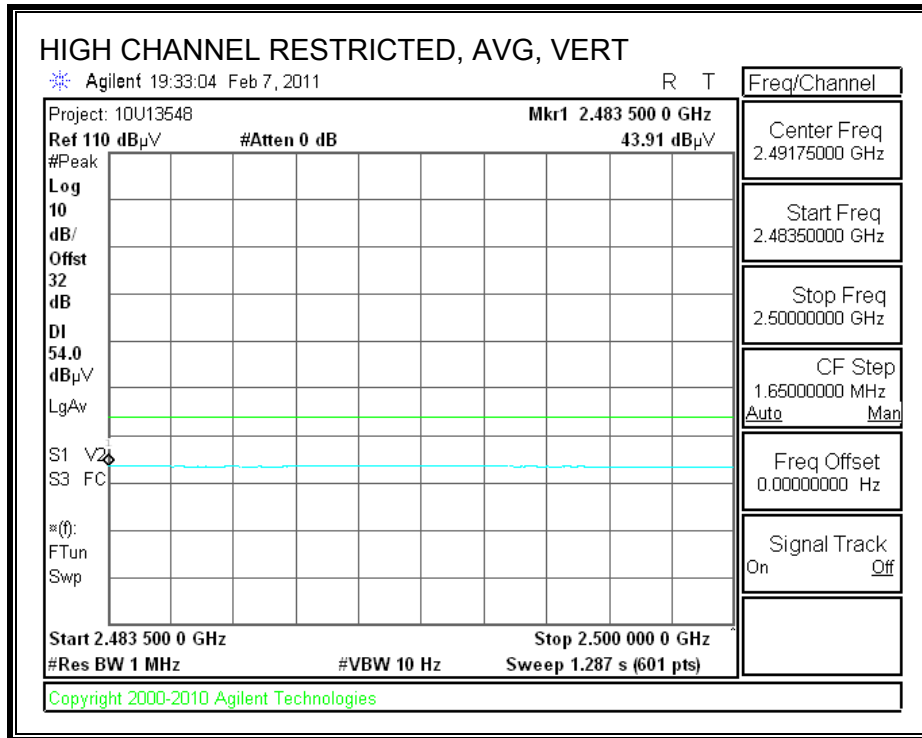



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement													
Compliance Certification Services, Fremont 5m Chamber													
Test Engr:		Tom Chen											
Date:		02/09/11											
Project #:		10U13548											
Test Target:		FCC Class B											
Mode Oper:		GFSK, TX mode											
f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit									
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit									
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit									
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit									
CL	Cable Loss	HPF	High Pass Filter										
f	Dist	Read	AF	CL	Amp	D Corr	Fitr	Corr.	Limit	Margin	Ant. Pol.	Det.	Notes
GHz	(m)	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dB	V/H	P/A/QP	
2402MHz GFSK													
4.804	3.0	41.9	33.0	5.8	-36.5	0.0	0.6	44.8	74.0	-29.2	V	P	
4.804	3.0	34.1	33.0	5.8	-36.5	0.0	0.6	37.0	54.0	-17.0	V	A	
12.010	3.0	35.1	39.0	9.7	-35.4	0.0	0.9	49.3	74.0	-24.7	V	P	
12.010	3.0	22.8	39.0	9.7	-35.4	0.0	0.9	37.0	54.0	-17.0	V	A	
2402MHz GFSK													
4.804	3.0	46.4	33.0	5.8	-36.5	0.0	0.6	49.3	74.0	-24.7	H	P	
4.804	3.0	39.1	33.0	5.8	-36.5	0.0	0.6	42.1	54.0	-11.9	H	A	
12.010	3.0	35.4	39.0	9.7	-35.4	0.0	0.9	49.6	74.0	-24.4	H	P	
12.010	3.0	22.9	39.0	9.7	-35.4	0.0	0.9	37.1	54.0	-16.9	H	A	
2441MHz GFSK													
4.882	3.0	44.5	33.1	5.8	-36.5	0.0	0.6	47.6	74.0	-26.4	H	P	
4.882	3.0	37.0	33.1	5.8	-36.5	0.0	0.6	40.1	54.0	-13.9	H	A	
7.323	3.0	41.4	35.3	7.3	-36.2	0.0	0.6	48.4	74.0	-25.6	H	P	
7.323	3.0	32.5	35.3	7.3	-36.2	0.0	0.6	39.5	54.0	-14.5	H	A	
2441MHz GFSK													
4.882	3.0	39.4	33.1	5.8	-36.5	0.0	0.6	42.5	74.0	-31.5	V	P	
4.882	3.0	28.7	33.1	5.8	-36.5	0.0	0.6	31.8	54.0	-22.2	V	A	
7.323	3.0	38.5	35.3	7.3	-36.2	0.0	0.6	45.5	74.0	-28.5	V	P	
7.323	3.0	27.8	35.3	7.3	-36.2	0.0	0.6	34.8	54.0	-19.2	V	A	
2480MHz GFSK													
4.960	3.0	37.6	33.2	5.9	-36.5	0.0	0.6	40.8	74.0	-33.2	V	P	
4.960	3.0	26.7	33.2	5.9	-36.5	0.0	0.6	30.0	54.0	-24.0	V	A	
7.440	3.0	39.2	35.5	7.3	-36.2	0.0	0.6	46.4	74.0	-27.6	V	P	
7.440	3.0	29.3	35.5	7.3	-36.2	0.0	0.6	36.5	54.0	-17.5	V	A	
2480MHz GFSK													
4.960	3.0	41.9	33.2	5.9	-36.5	0.0	0.6	45.2	74.0	-28.8	H	P	
4.960	3.0	33.8	33.2	5.9	-36.5	0.0	0.6	37.1	54.0	-16.9	H	A	
7.440	3.0	43.9	35.5	7.3	-36.2	0.0	0.6	51.2	74.0	-22.8	H	P	
7.440	3.0	36.3	35.5	7.3	-36.2	0.0	0.6	43.6	54.0	-10.4	H	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													


8.2.2. ENHANCED DATA RATE 8PSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

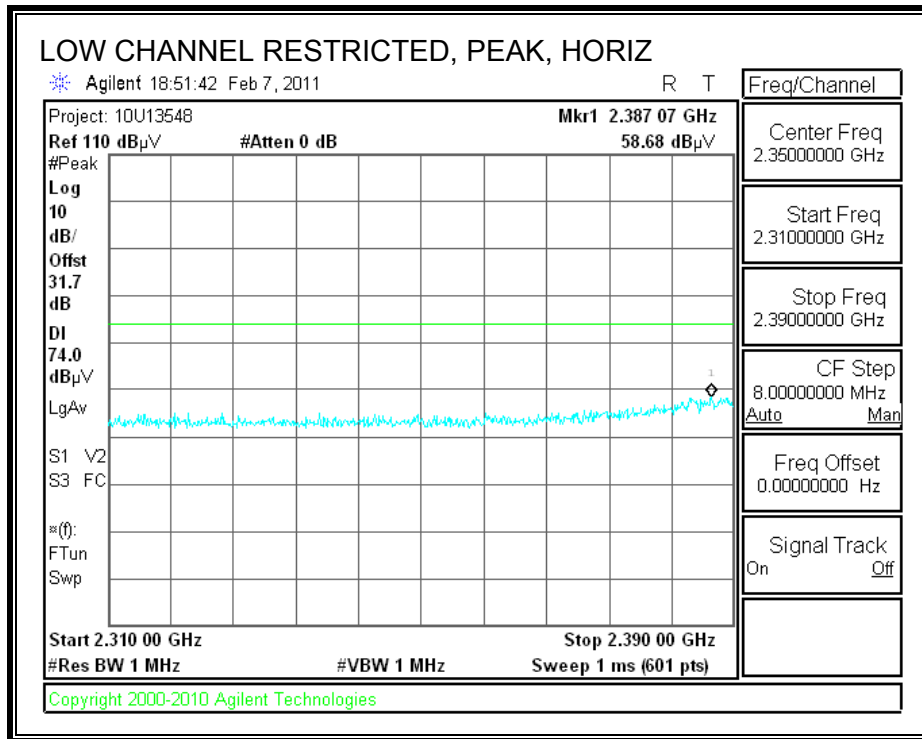

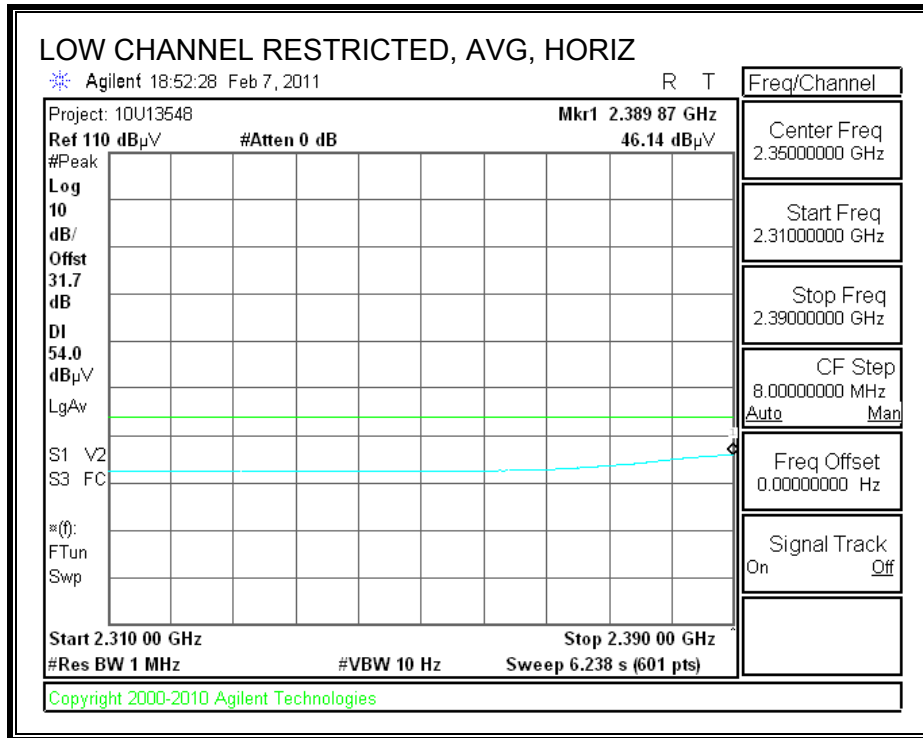



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

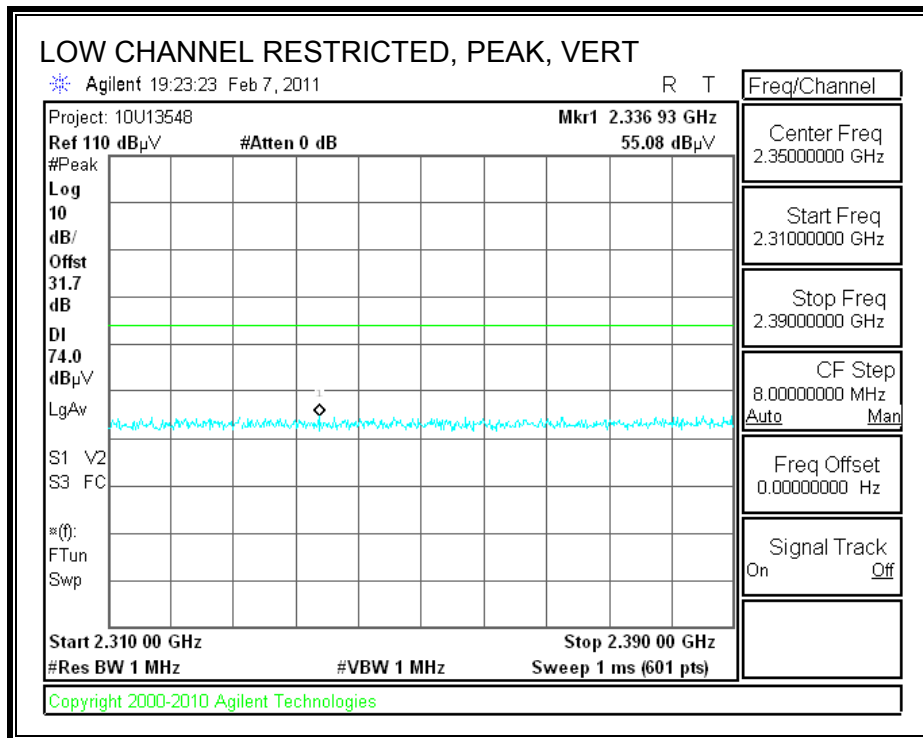

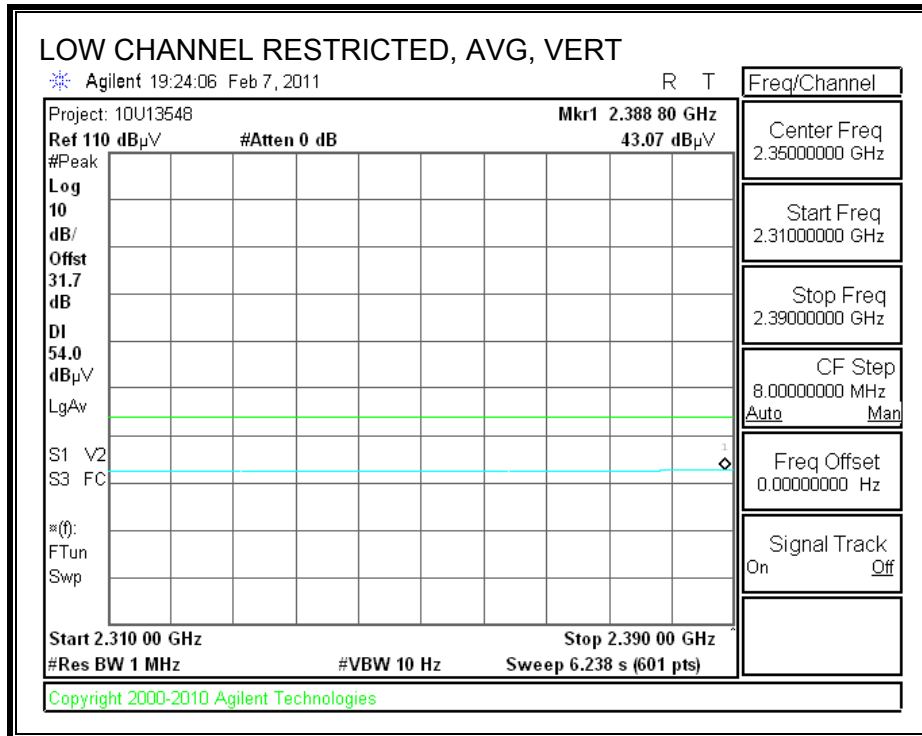



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

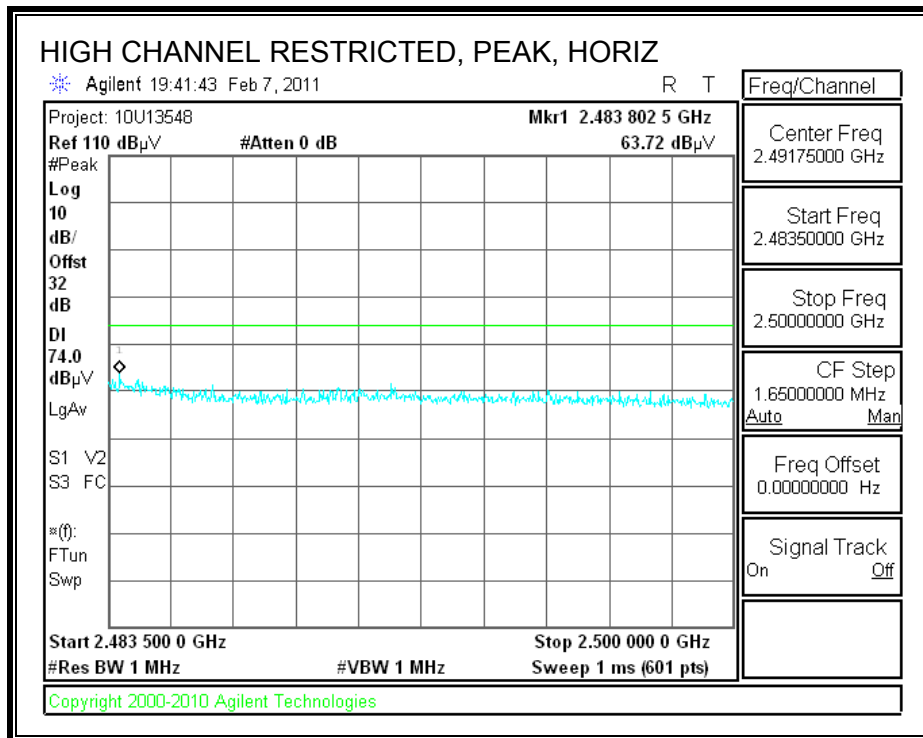

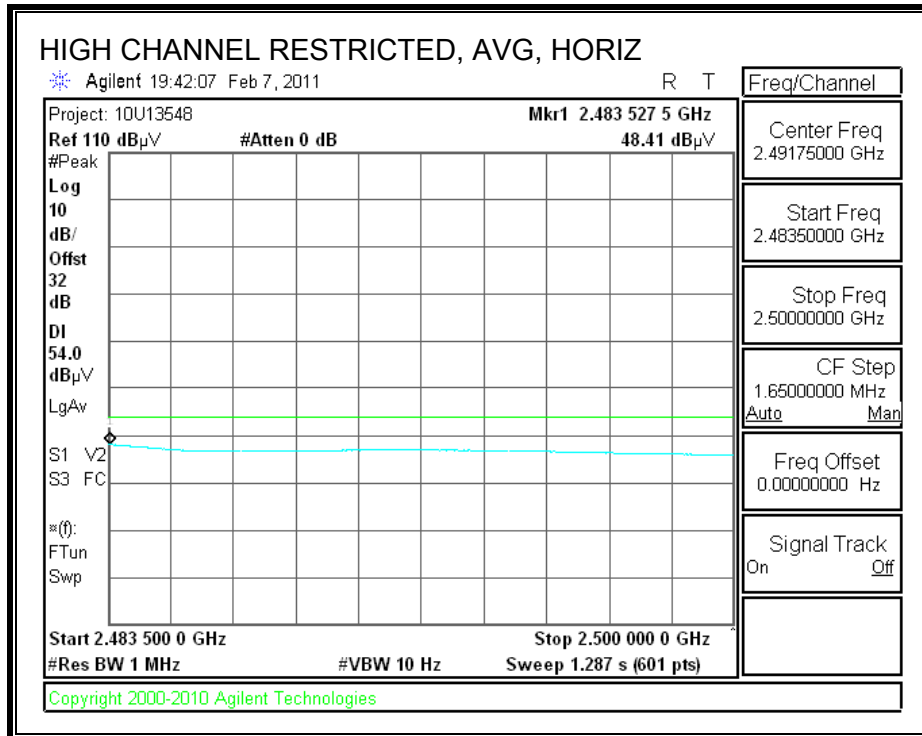

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

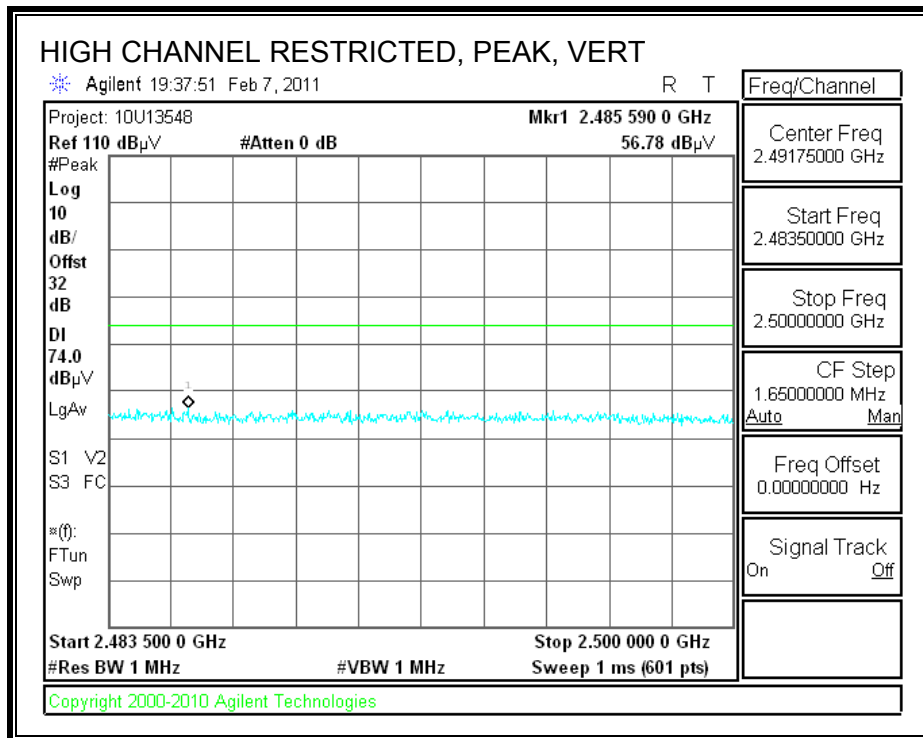

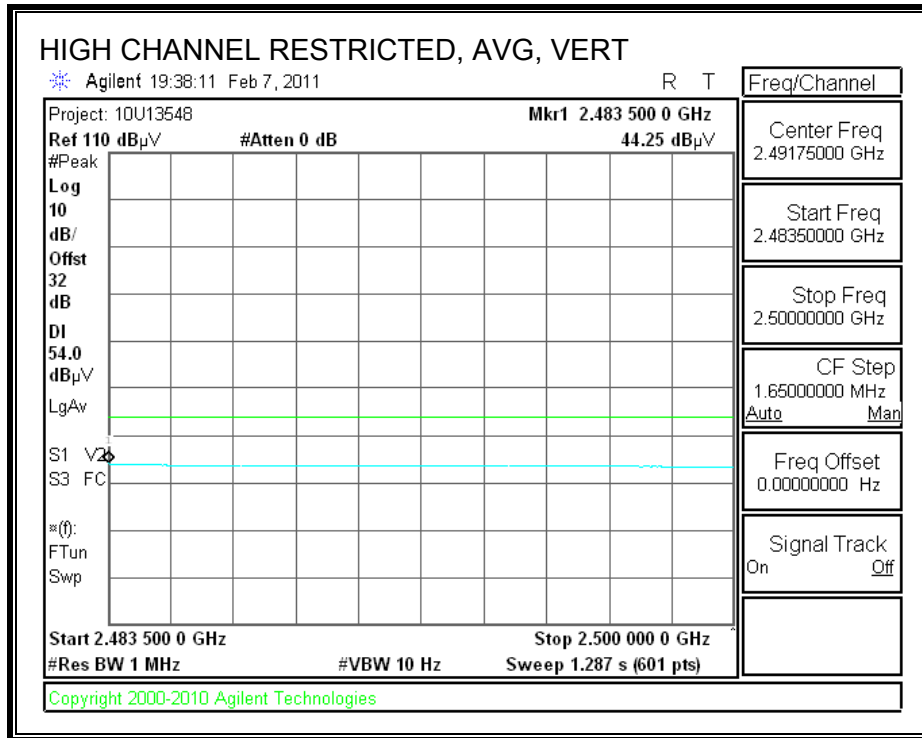

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber													
Test Engr:		Tom Chen											
Date:		02/09/11											
Project #:		10U13548											
Test Target:		FCC Class B											
Mode Oper:		8PSK, TX mode											
f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit									
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit									
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit									
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit									
CL	Cable Loss	HPF	High Pass Filter										
f	Dist	Read	AF	CL	Amp	D Corr	Fitr	Corr.	Limit	Margin	Ant. Pol.	Det.	Notes
GHz	(m)	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dB	V/H	P/A/QP	
2402MHz 8PSK													
4.804	3.0	40.6	33.0	5.8	-36.5	0.0	0.6	43.6	74.0	-30.5	V	P	
4.804	3.0	30.9	33.0	5.8	-36.5	0.0	0.6	33.8	54.0	-20.2	V	A	
12.010	3.0	35.0	39.0	9.7	-35.4	0.0	0.9	49.2	74.0	-24.8	V	P	
12.010	3.0	22.7	39.0	9.7	-35.4	0.0	0.9	36.9	54.0	-17.1	V	A	
2402MHz 8PSK													
4.804	3.0	43.7	33.0	5.8	-36.5	0.0	0.6	46.6	74.0	-27.4	H	P	
4.804	3.0	35.6	33.0	5.8	-36.5	0.0	0.6	38.5	54.0	-15.5	H	A	
12.010	3.0	35.3	39.0	9.7	-35.4	0.0	0.9	49.5	74.0	-24.5	H	P	
12.010	3.0	22.7	39.0	9.7	-35.4	0.0	0.9	36.9	54.0	-17.1	H	A	
2441MHz 8PSK													
4.882	3.0	41.3	33.1	5.8	-36.5	0.0	0.6	44.4	74.0	-29.6	H	P	
4.882	3.0	32.2	33.1	5.8	-36.5	0.0	0.6	35.3	54.0	-18.7	H	A	
7.323	3.0	39.8	35.3	7.3	-36.2	0.0	0.6	46.8	74.0	-27.2	H	P	
7.323	3.0	27.7	35.3	7.3	-36.2	0.0	0.6	34.7	54.0	-19.3	H	A	
2441MHz 8PSK													
4.882	3.0	38.6	33.1	5.8	-36.5	0.0	0.6	41.7	74.0	-32.3	V	P	
4.882	3.0	26.9	33.1	5.8	-36.5	0.0	0.6	30.0	54.0	-24.0	V	A	
7.323	3.0	37.3	35.3	7.3	-36.2	0.0	0.6	44.3	74.0	-29.7	V	P	
7.323	3.0	24.8	35.3	7.3	-36.2	0.0	0.6	31.8	54.0	-22.2	V	A	
2480MHz 8PSK													
4.960	3.0	40.5	33.2	5.9	-36.5	0.0	0.6	43.8	74.0	-30.2	H	P	
4.960	3.0	30.8	33.2	5.9	-36.5	0.0	0.6	34.1	54.0	-19.9	H	A	
7.440	3.0	40.7	35.5	7.3	-36.2	0.0	0.6	48.0	74.0	-26.0	H	P	
7.440	3.0	29.9	35.5	7.3	-36.2	0.0	0.6	37.2	54.0	-16.8	H	A	
2480MHz 8PSK													
4.960	3.0	37.8	33.2	5.9	-36.5	0.0	0.6	41.0	74.0	-33.0	V	P	
4.960	3.0	25.6	33.2	5.9	-36.5	0.0	0.6	28.9	54.0	-25.1	V	A	
7.440	3.0	37.4	35.5	7.3	-36.2	0.0	0.6	44.6	74.0	-29.4	V	P	
7.440	3.0	25.4	35.5	7.3	-36.2	0.0	0.6	32.7	54.0	-21.3	V	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													

8.3. RECEIVER ABOVE 1 GHz

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Project #: 10U13548
 Date: 2/9/2011
 Test Engineer: Tom Chen
 Configuration: EUT alone
 Mode: Bluetooth, RX mode

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit
T73; S/N: 6717 @3m	T144 Miteq 3008A00931			RX RSS 210

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500			Average Measurements RBW=1MHz; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
1.113	3.0	48.4	43.6	24.2	2.5	-39.3	0.0	0.0	35.8	31.0	74	54	-38.2	-23.0	V
1.240	3.0	48.5	41.3	24.7	2.6	-39.1	0.0	0.0	36.6	29.4	74	54	-37.4	-24.6	V
4.127	3.0	42.5	32.1	32.4	5.3	-36.6	0.0	0.0	43.5	33.1	74	54	-30.5	-20.9	V
1.100	3.0	47.3	32.8	24.2	2.5	-39.3	0.0	0.0	34.6	20.2	74	54	-39.4	-33.8	H
1.507	3.0	47.0	33.4	25.6	3.0	-38.8	0.0	0.0	36.8	23.2	74	54	-37.2	-30.8	H
2.493	3.0	44.3	32.1	28.5	3.9	-37.5	0.0	0.0	39.2	27.1	74	54	-34.8	-26.9	H

Rev. 07.22.09


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

8.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

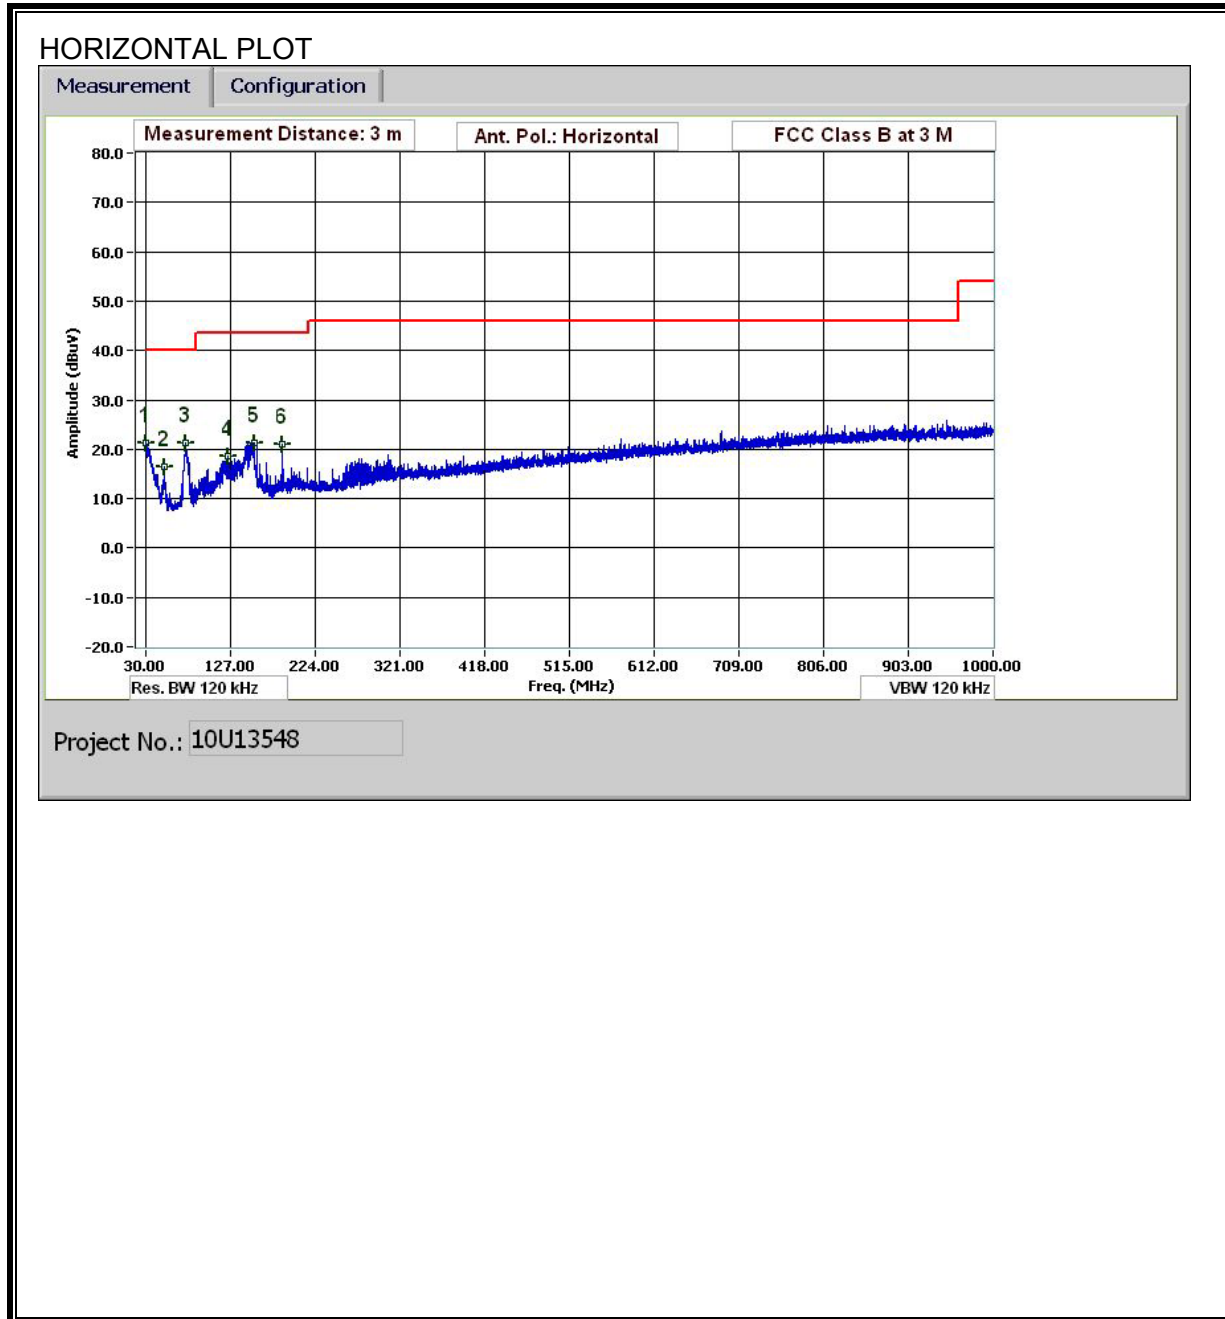

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

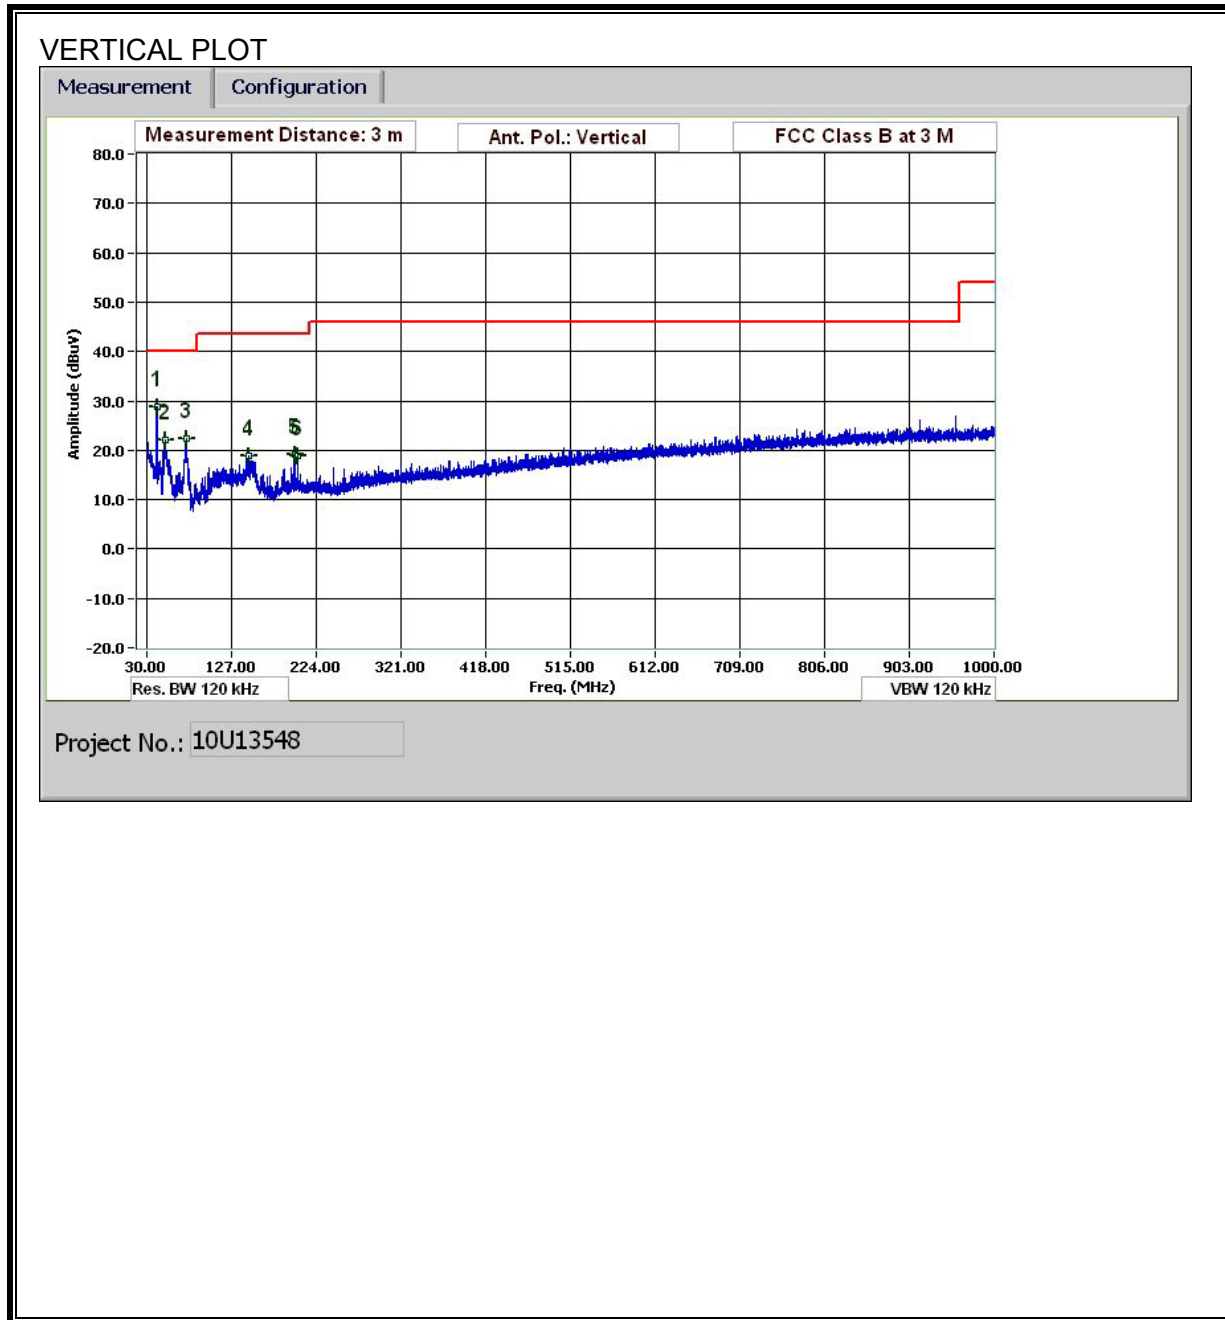

HORIZONTAL AND VERTICAL DATA

30-1000MHz Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
 Date: 02/07/11
 Project #: 10U13548
 Test Target: FCC Class B
 Mode Oper: TX mode, Worst case

f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit
 Dist Distance to Antenna D Corr Distance Correct to 3 meters
 Read Analyzer Reading Filter Filter Insert Loss
 AF Antenna Factor Corr. Calculated Field Strength
 CL Cable Loss Limit Field Strength Limit

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Pad dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
Vertical													
41.4	3.0	43.5	13.0	0.6	28.4	0.0	0.0	28.7	40.0	-11.3	V	P	
51.361	3.0	41.5	8.3	0.6	28.4	0.0	0.0	22.1	40.0	-17.9	V	P	
75.002	3.0	42.3	7.7	0.8	28.3	0.0	0.0	22.4	40.0	-17.6	V	P	
146.765	3.0	33.1	12.8	1.1	28.3	0.0	0.0	18.8	43.5	-24.7	V	P	
199.087	3.0	34.1	11.9	1.2	28.2	0.0	0.0	19.0	43.5	-24.5	V	P	
202.807	3.0	33.8	12.0	1.3	28.2	0.0	0.0	18.8	43.5	-24.7	V	P	
Horizontal													
30.48	3.0	29.2	19.9	0.5	28.4	0.0	0.0	21.2	40.0	-18.8	H	P	
51.601	3.0	35.9	8.3	0.6	28.4	0.0	0.0	16.5	40.0	-23.5	H	P	
75.362	3.0	41.3	7.7	0.8	28.3	0.0	0.0	21.3	40.0	-18.7	H	P	
123.484	3.0	32.1	13.7	1.1	28.3	0.0	0.0	18.5	43.5	-25.0	H	P	
153.965	3.0	36.2	12.2	1.1	28.3	0.0	0.0	21.3	43.5	-22.2	H	P	
186.126	3.0	36.9	11.3	1.2	28.2	0.0	0.0	21.1	43.5	-22.4	H	P	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Class	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	52.15	--	26.29	0.00	65.84	55.84	-13.69	-29.55	L1
0.20	49.37	--	23.99	0.00	63.45	53.45	-14.08	-29.46	L1
0.21	46.48	--	23.13	0.00	63.13	53.13	-16.65	-30.00	L1
0.15	48.81	--	20.81	0.00	65.89	55.89	-17.08	-35.08	L2
0.18	43.43	--	31.26	0.00	64.63	54.63	-21.20	-23.37	L2
0.64	41.94	--	29.60	0.00	56.00	46.00	-14.06	-16.40	L2
6 Worst Data									

LINE 1 RESULTS

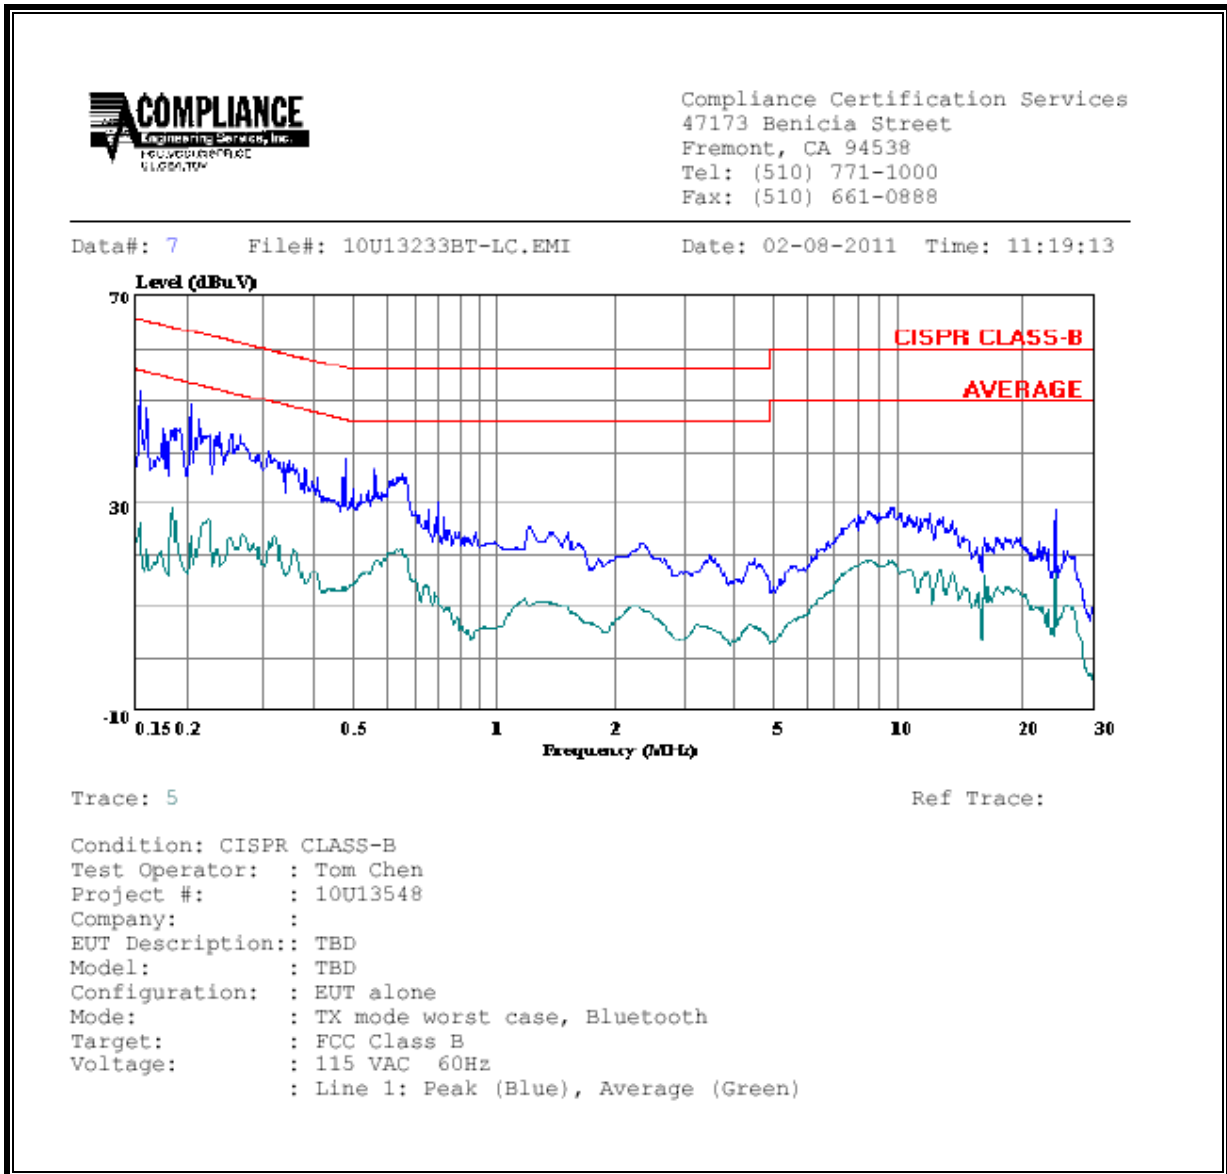

Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 7 File#: 10U13233BT-LC.EMI Date: 02-08-2011 Time: 11:19:13

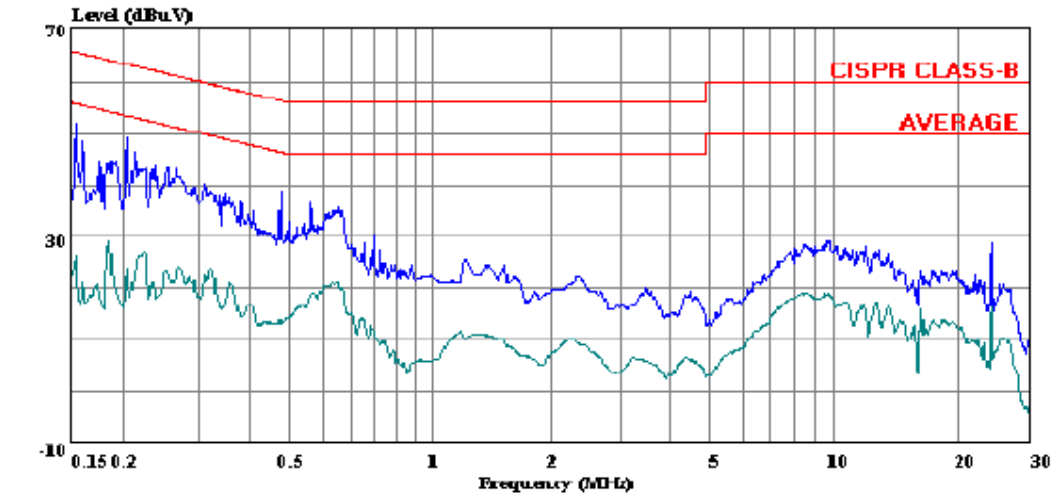

LINE 2 RESULTS

