

Date/Time: 2/26/2011 10:28:27 AM, Date/Time: 2/26/2011 10:46:47 AM

Back Surface 10mm 850 Mid**DUT: iPad; Serial: DLXDV00MDK61**

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 836.52 MHz

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³ Temp = 21.2 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1092
- Measurement SW: DASY52, V52.2 Build 0;

Flat-Section MSL/Bottom Face 10mm Mid/Area Scan (21x9x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.608 mW/g

Flat-Section MSL/Bottom Face 10mm Mid/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.881 W/kg

SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.354 mW/g

Maximum value of SAR (measured) = 0.614 mW/g

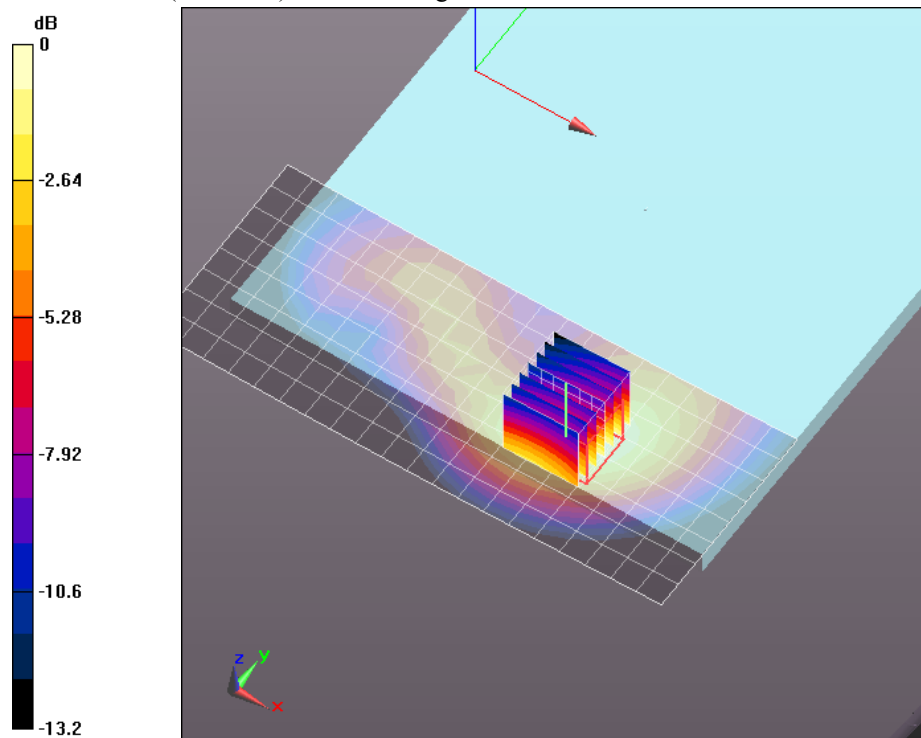

0 dB = 0.614mW/g

Date/Time: 2/26/2011 11:23:04 AM, Date/Time: 2/26/2011 11:32:39 AM

Back Surface 10mm 850 EVDO Mid

DUT: iPad; Serial: DLXDV00MDK61

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 836.52 MHz

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³ Temp = 21.1 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1092
- Measurement SW: DASY52, V52.2 Build 0;

Flat-Section MSL/Bottom Face 10mm Mid EVDO/Area Scan (11x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.554 mW/g

Flat-Section MSL/Bottom Face 10mm Mid EVDO/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.570 mW/g

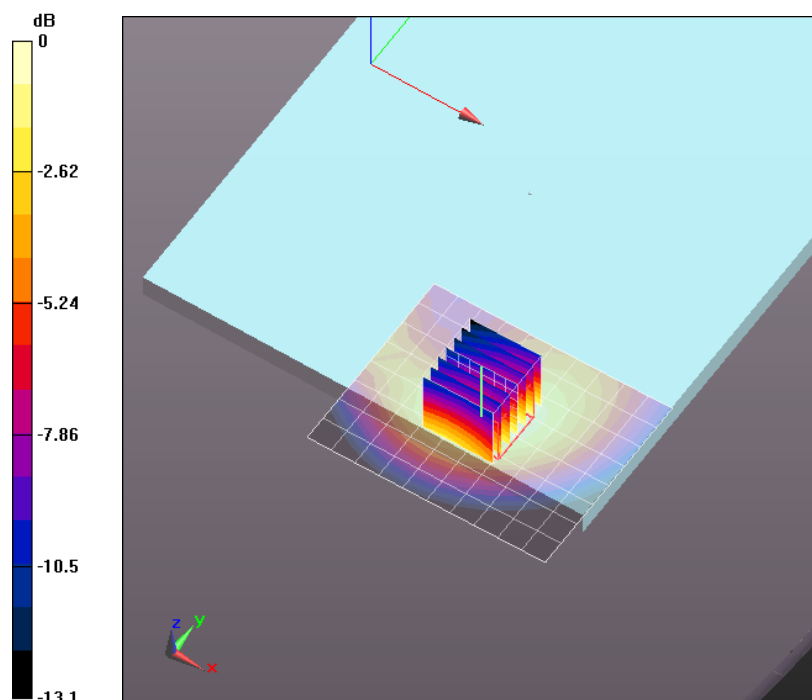

0 dB = 0.570mW/g

Date/Time: 2/26/2011 11:23:04 AM, Date/Time: 2/26/2011 11:32:39 AM

Back Surface 10mm 850 EVDO Mid**DUT: iPad; Serial: DLXDV00MDK61**

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 836.52 MHz

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³ Temp = 21.2 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1092
- Measurement SW: DASY52, V52.2 Build 0;

Flat-Section MSL/Bottom Face 10mm Mid EVDO/Area Scan (11x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.554 mW/g


Flat-Section MSL/Bottom Face 10mm Mid EVDO/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.570 mW/g

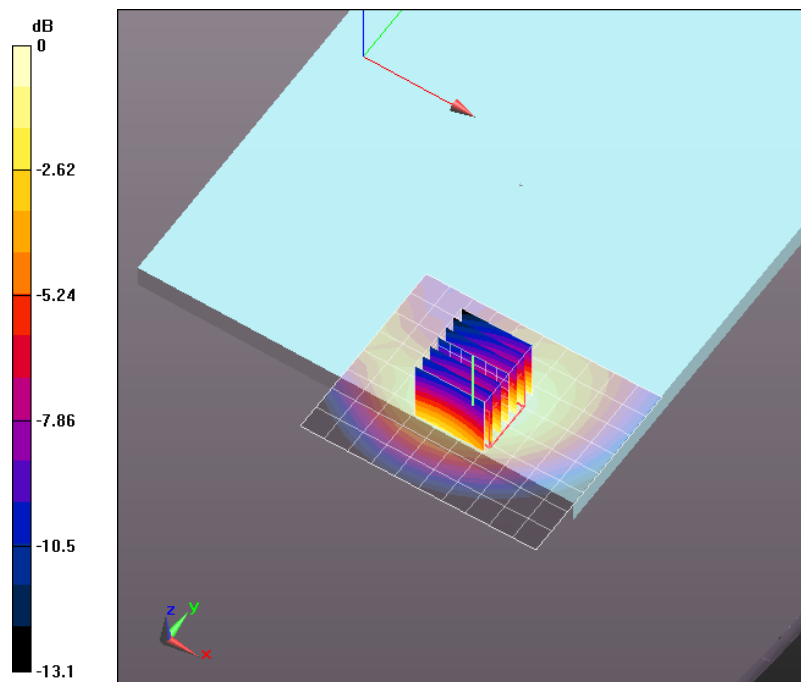

0 dB = 0.570mW/g

Date/Time: 2/26/2011 2:56:39 PM, Date/Time: 2/26/2011 3:07:24 PM

Back Surface 10mm 1900 EVDO Mid

DUT: iPad; Serial: DLXDV00MDK61

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³ 21.2 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(4.62, 4.62, 4.62);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Flat-Section MSL 1900/Bottom Face 10mm Mid EV-DO/Area Scan

(16x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.683 mW/g

Flat-Section MSL 1900/Bottom Face 10mm Mid EV-DO/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.639 mW/g; SAR(10 g) = 0.374 mW/g

Maximum value of SAR (measured) = 0.707 mW/g

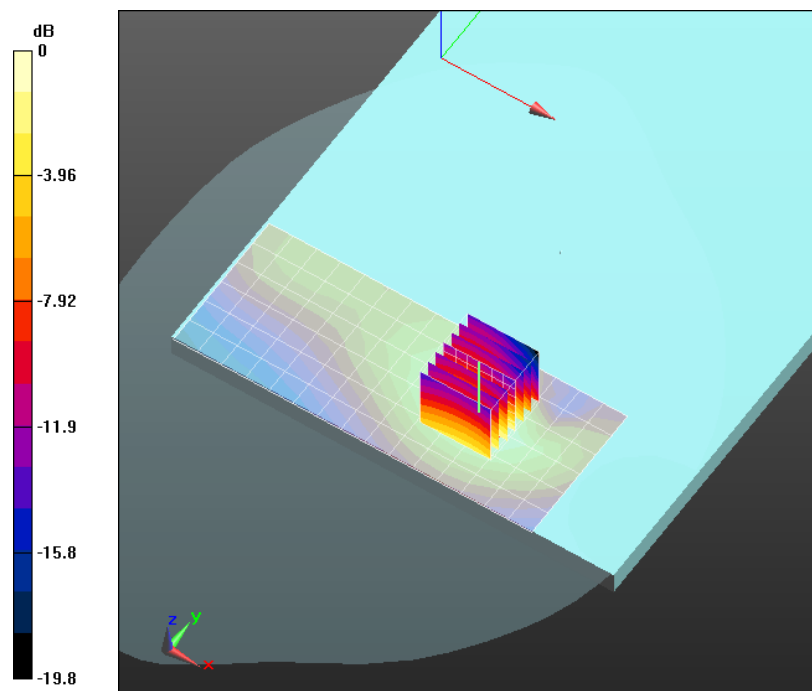

Date/Time: 2/26/2011 8:51:27 PM, Date/Time: 2/26/2011 9:02:22 PM

Top Edge 9.5mm 850 CDMA Mid**DUT: iPad; Serial: DLXDV00MDK61**

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 836.52 MHz

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³ Temp = 21.2 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1092
- Measurement SW: DASY52, V52.2 Build 0;

Edge MSL/Bottom Face 10mm Mid/Area Scan (16x7x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.426 mW/g

Edge MSL/Bottom Face 10mm Mid/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 0.418 mW/g

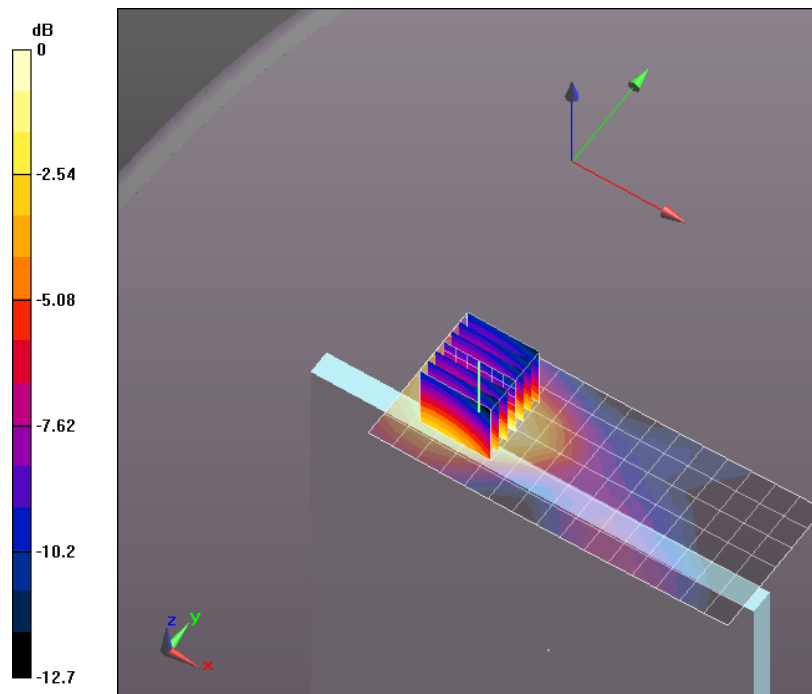

0 dB = 0.418mW/g

Date/Time: 2/26/2011 7:40:41 PM, Date/Time: 2/26/2011 7:51:35 PM

Top Edge 9.5mm 850 EVDO Mid

DUT: iPad; Serial: DLXDV00MDK61

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 836.52 MHz

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³ Temp = 21.2 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1092
- Measurement SW: DASY52, V52.2 Build 0;

Edge MSL/Bottom Face 9.5mm Mid EV-DO/Area Scan (16x7x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.382 mW/g

Edge MSL/Bottom Face 9.5mm Mid EV-DO/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.04 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.552 W/kg

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.383 mW/g

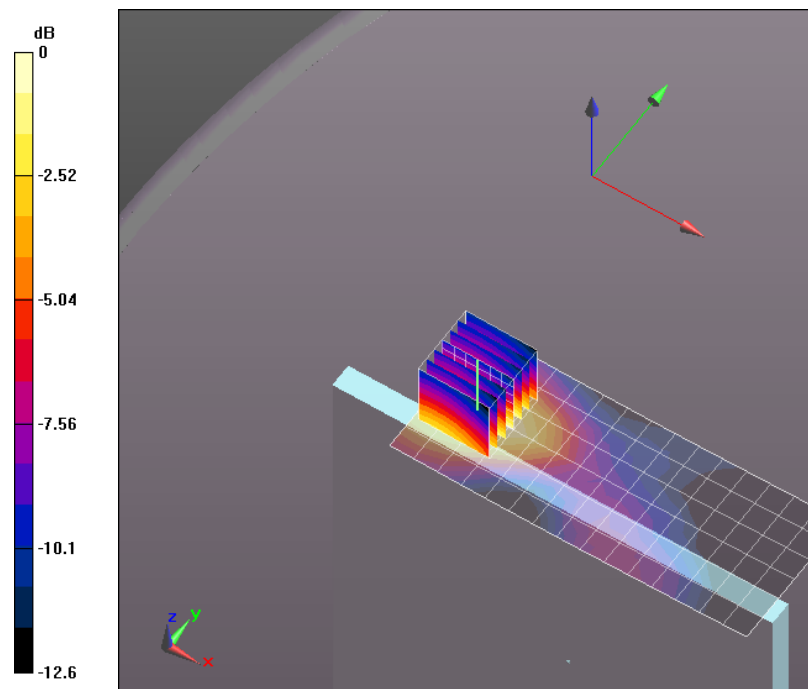

0 dB = 0.383mW/g

Date/Time: 2/26/2011 5:18:47 PM, Date/Time: 2/26/2011 5:24:13 PM

Top Edge 9.5mm 1900 CDMA Low**DUT: iPad; Serial: DLXDV00MDK61**

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 1851.25 MHz

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³ Temp = 21.2 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(4.62, 4.62, 4.62);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Edge MSL 1900/Bottom Face 10mm Low/Area Scan (8x7x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.13 mW/g

Edge MSL 1900/Bottom Face 10mm Low/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.596 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

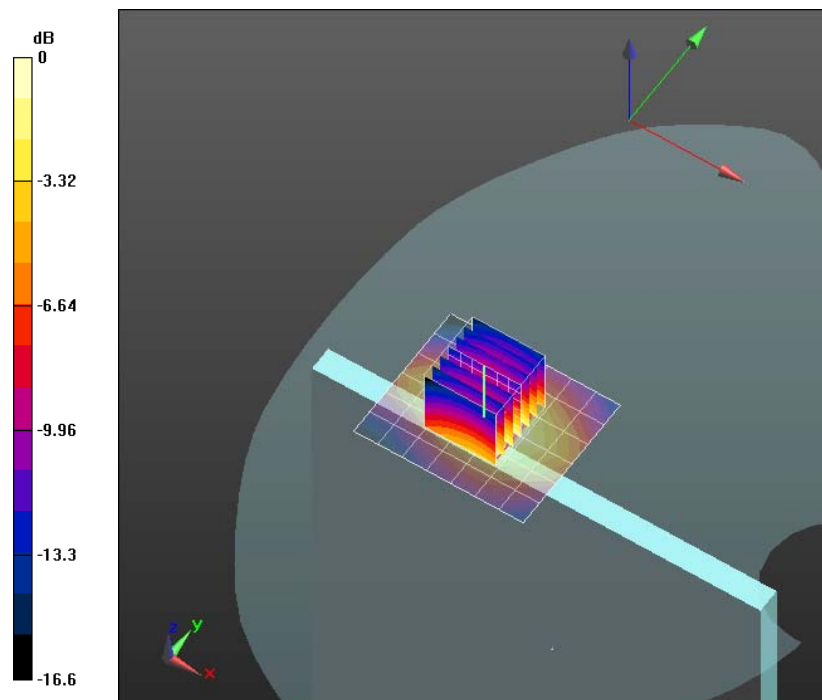

0 dB = 1.15mW/g

Date/Time: 2/26/2011 4:44:38 PM, Date/Time: 2/26/2011 4:50:03 PM

Top Edge 9.5mm 1900 CDMA Mid

DUT: iPad; Serial: DLXDV00MDK61

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³ Temp = 21.2 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(4.62, 4.62, 4.62);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Edge MSL 1900/Bottom Face 10mm Mid/Area Scan (8x7x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.28 mW/g

Edge MSL 1900/Bottom Face 10mm Mid/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = 0.203 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.678 mW/g

Maximum value of SAR (measured) = 1.32 mW/g

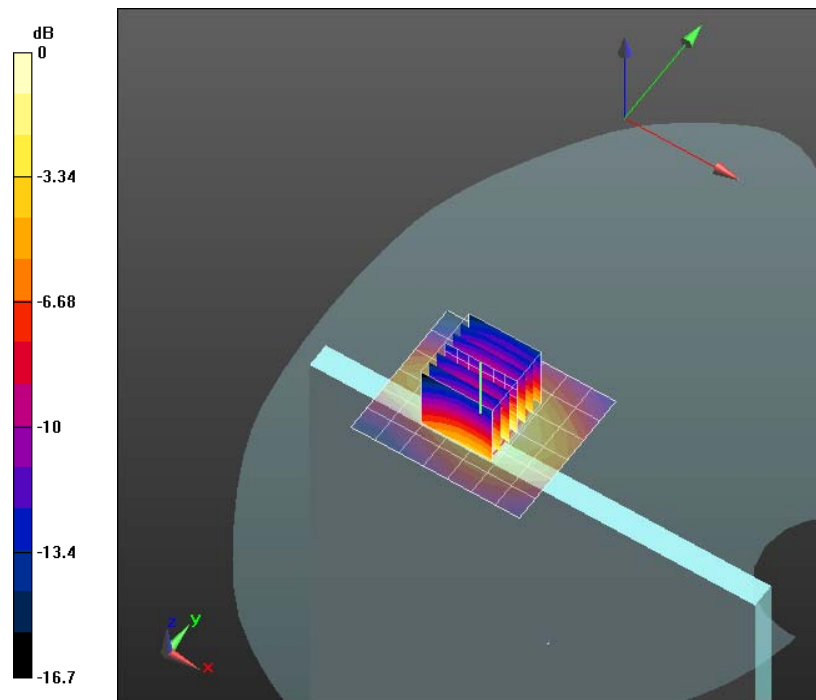

0 dB = 1.32mW/g

Date/Time: 2/26/2011 5:39:16 PM, Date/Time: 2/26/2011 5:44:42 PM

Top Edge 9.5mm 1900 CDMA High

DUT: iPad; Serial: DLXDV00MDK61

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 1908.75 MHz

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³ Temp = 21.2 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(4.62, 4.62, 4.62);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Edge MSL 1900/Bottom Face 10mm High/Area Scan (8x7x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.52 mW/g

Edge MSL 1900/Bottom Face 10mm High/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 1.4 mW/g; SAR(10 g) = 0.802 mW/g

Maximum value of SAR (measured) = 1.56 mW/g

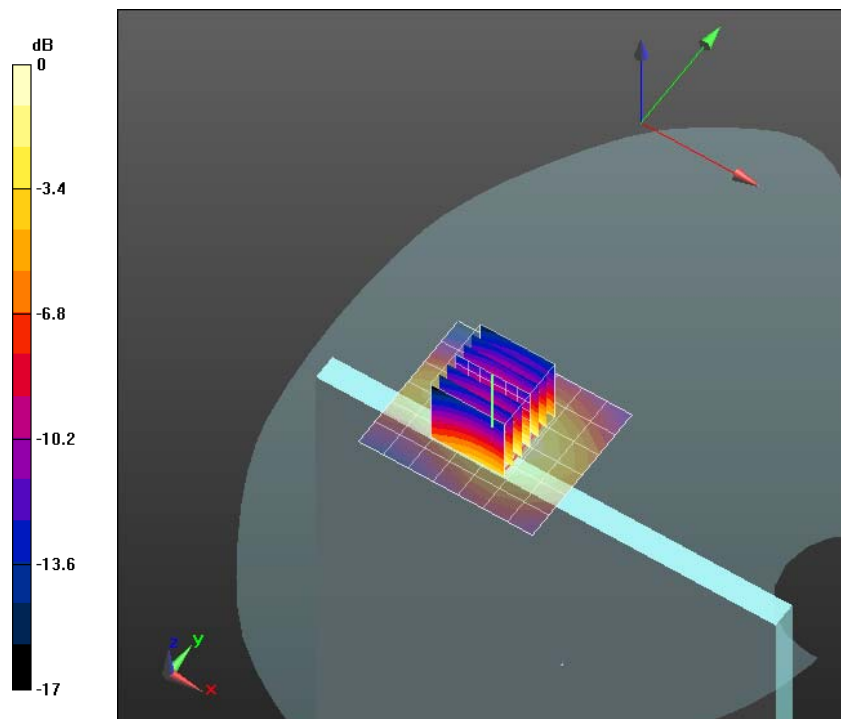

0 dB = 1.56mW/g

Date/Time: 2/26/2011 6:43:52 PM, Date/Time: 2/26/2011 6:54:19 PM

Top Edge 9.5mm 1900 EVDO Low

DUT: IPad; Serial: DLXDV00MDK61

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 1851.25 MHz

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³ Temp = 21.3 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(4.62, 4.62, 4.62);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Edge MSL 1900/Bottom Face 10mm Low EV-DO/Area Scan (16x7x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.13 mW/g

Edge MSL 1900/Bottom Face 10mm Low EV-DO/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = 0.156 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.597 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

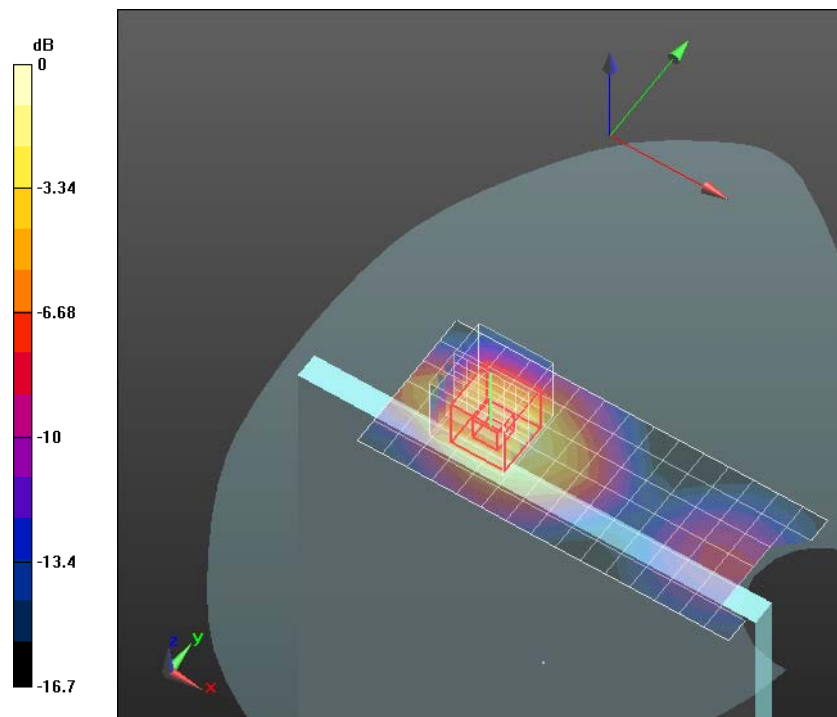

0 dB = 1.15mW/g

Date/Time: 2/26/2011 4:12:38 PM, Date/Time: 2/26/2011 4:23:05 PM

Top Edge 9.5mm 1900 EVDO Mid

DUT: iPad; Serial: DLXDV00MDK61

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³ Temp = 21.2 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(4.62, 4.62, 4.62);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Edge MSL 1900/Bottom Face 10mm Mid EV-DO/Area Scan (16x7x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.23 mW/g

Edge MSL 1900/Bottom Face 10mm Mid EV-DO/Zoom Scan (7x7x7)/Cube


0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.675 mW/g

Maximum value of SAR (measured) = 1.32 mW/g

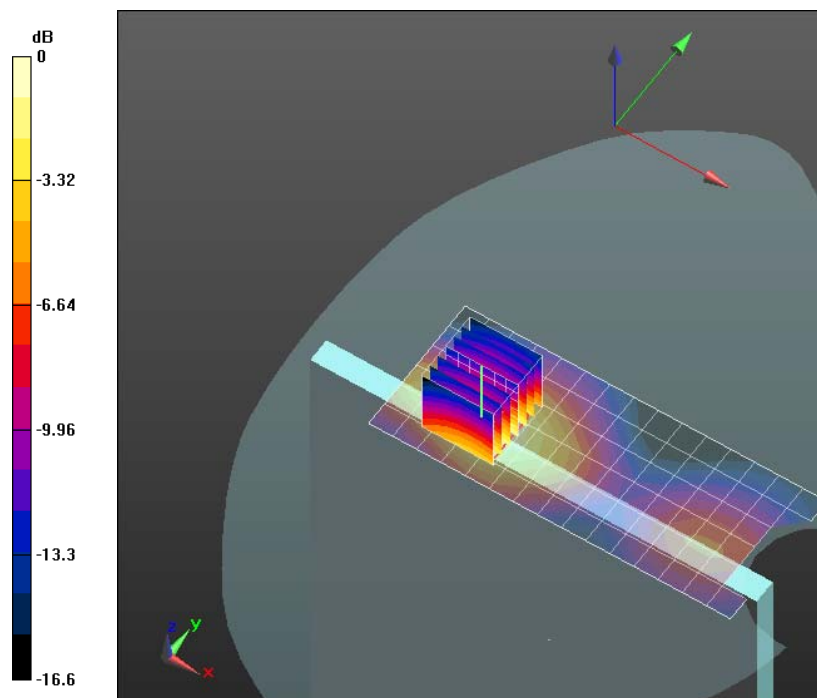

0 dB = 1.32mW/g

Date/Time: 2/28/2011 1:36:50 PM, Date/Time: 2/28/2011 1:47:17 PM

Top Edge 9.5mm 1900 EVDO High

DUT: iPad; Serial: DLXDV00MDK61

Communication System: CDMA2000 (1xRTT, RC1); Frequency: 1908.75 MHz

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³ Temp = 21.1 C

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(4.62, 4.62, 4.62);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Edge MSL 1900 2-28-2011/Bottom Face 10mm High EV-DO/Area Scan

(16x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.4 mW/g

Edge MSL 1900 2-28-2011/Bottom Face 10mm High EV-DO/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = -0.049 dB


Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.42 mW/g; SAR(10 g) = 0.813 mW/g

Maximum value of SAR (measured) = 1.58 mW/g

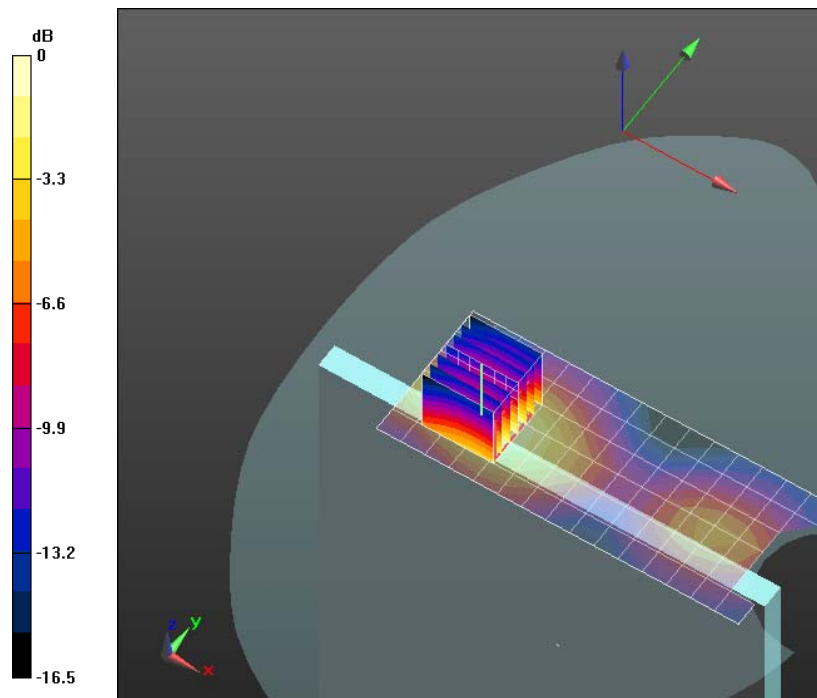

0 dB = 1.58mW/g

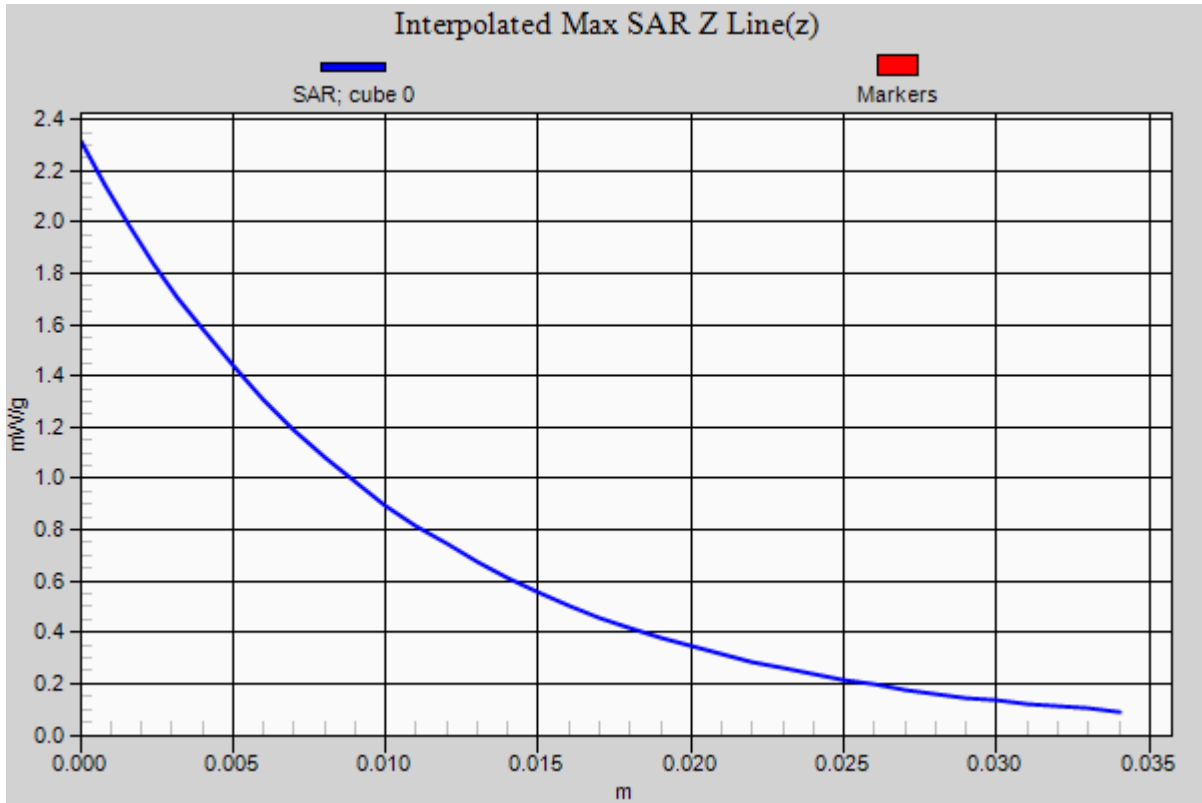

Date/Time: 2/26/2011 9:37:31 AM, Date/Time: 2/26/2011 9:44:04 AM

FCCSystemPerformanceCheck-835**DUT: Dipole 835 MHz D835V2; Serial: D835V2 - SN: 4d113**

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1092
- Measurement SW: DASY52, V52.2 Build 0;

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=xx mW, dist=3.0mm (ES-Probe)/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.3 mW/g

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=xx mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 114.8 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 6.82 mW/g

Maximum value of SAR (measured) = 12.2 mW/g

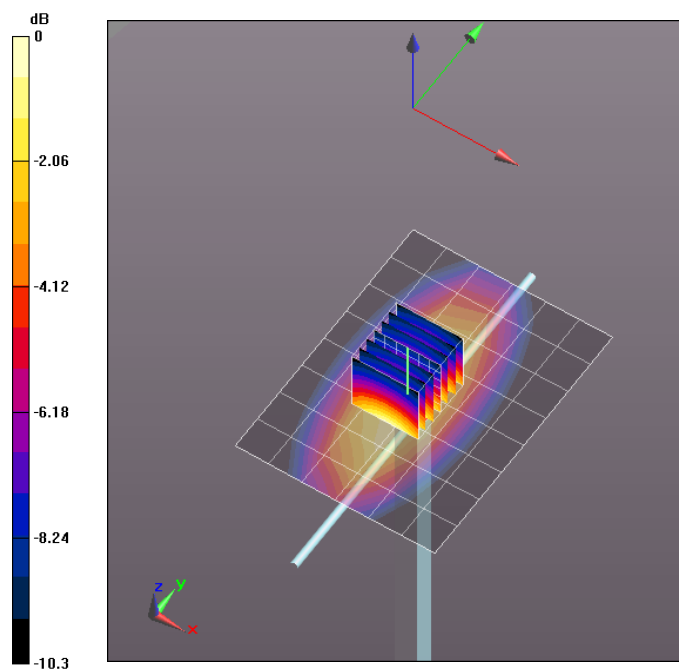

0 dB = 12.2mW/g

Date/Time: 2/26/2011 2:13:18 PM, Date/Time: 2/26/2011 2:18:18 PM

FCCSystemPerformanceCheck-1900

DUT: Dipole 1900 MHz D1900V2; Serial: D1900V2 - SN: 5d135

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(4.62, 4.62, 4.62);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=xx mW, dist=3.0mm (ES-Probe)/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 49.5 mW/g

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=xx mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 197.7 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 78.9 W/kg

SAR(1 g) = 44.7 mW/g; SAR(10 g) = 23.4 mW/g

Maximum value of SAR (measured) = 57.1 mW/g

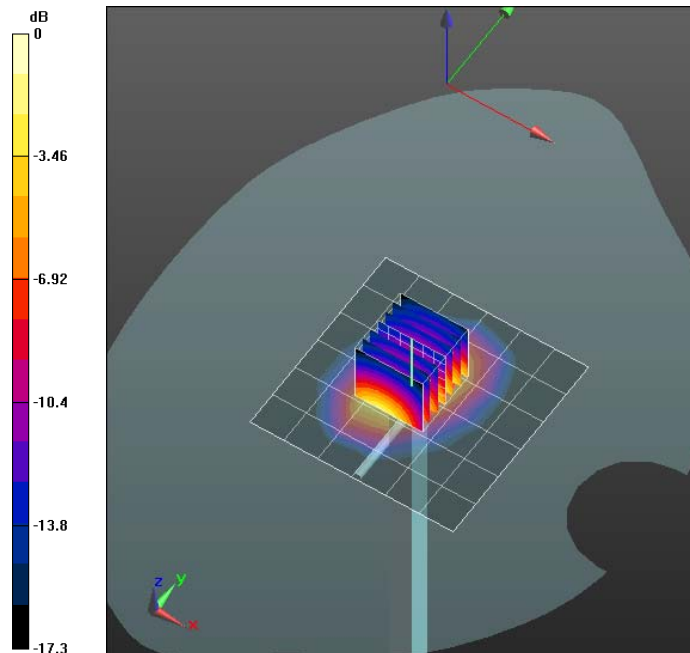

0 dB = 57.1mW/g

Date/Time: 2/28/2011 1:03:36 PM, Date/Time: 2/28/2011 12:58:36 PM

FCCSystemPerformanceCheck 2-28-11**DUT: Dipole 1900 MHz D1900V2; Serial: D1900V2 - SN: 5d135**

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(4.62, 4.62, 4.62);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=xx mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 197.1 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 77.4 W/kg


SAR(1 g) = 44.2 mW/g; SAR(10 g) = 23.2 mW/g

Maximum value of SAR (measured) = 56.2 mW/g

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=xx mW, dist=3.0mm (ES-Probe)/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 48 mW/g

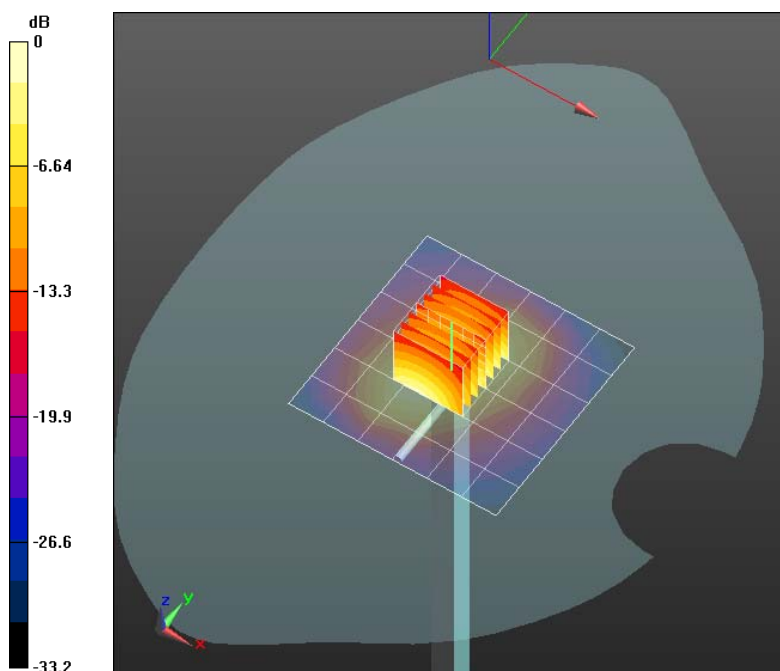

0 dB = 48mW/g