



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

802.11 a/b/g/n radio, Bluetooth Radio Function

MODEL NUMBER: A1403

**FCC ID: BCGA1403
IC: 579C-A1403**

REPORT NUMBER: 11U13938-3, Revision B

ISSUE DATE: FEBRUARY 3, 2012

Prepared for
**APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	11/14/11	Initial Issue	F. Ibrahim
A	02/02/12	Revised 1. Model number 2. FCC and IC ID	A. Zaffar
B	02/03/12	Revised EUT Description	A. Zaffar

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION.....</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>7</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>7</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	<i>7</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ANTENNA PORT TEST RESULTS	11
7.1. <i>BASIC DATA RATE GFSK MODULATION.....</i>	<i>11</i>
7.1.1. <i>20 dB AND 99% BANDWIDTH</i>	<i>11</i>
7.1.2. <i>HOPPING FREQUENCY SEPARATION</i>	<i>16</i>
7.1.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>18</i>
7.1.4. <i>AVERAGE TIME OF OCCUPANCY</i>	<i>21</i>
7.1.5. <i>OUTPUT POWER</i>	<i>25</i>
7.1.6. <i>AVERAGE POWER</i>	<i>28</i>
7.1.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>29</i>
8. ENHANCED DATA RATE QPSK MODULATION	34
8.1.1. <i>OUTPUT POWER</i>	<i>34</i>
8.1.2. <i>AVERAGE POWER</i>	<i>37</i>
9. ENHANCED DATA RATE 8PSK MODULATION	38
9.1.1. <i>20 dB AND 99% BANDWIDTH</i>	<i>38</i>
9.1.2. <i>HOPPING FREQUENCY SEPARATION</i>	<i>43</i>
9.1.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>45</i>
9.1.4. <i>AVERAGE TIME OF OCCUPANCY</i>	<i>48</i>
9.1.5. <i>OUTPUT POWER</i>	<i>52</i>
9.1.6. <i>AVERAGE POWER</i>	<i>55</i>
9.1.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>56</i>
10. RADIATED TEST RESULTS	61

10.1.	LIMITS AND PROCEDURE.....	61
10.2.	TRANSMITTER ABOVE 1 GHz.....	62
10.2.1.	BASIC DATA RATE GFSK MODULATION	62
10.2.2.	ENHANCED DATA RATE 8PSK MODULATION	67
10.3.	RECEIVER ABOVE 1 GHz.....	72
10.4.	WORST-CASE BELOW 1 GHz	73
11.	AC POWER LINE CONDUCTED EMISSIONS.....	76
12.	SETUP PHOTOS.....	80

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: The Apple iPad, Model A1403 is a tablet device with iPod functions (music, application support, and video), 802.11a/b/g/n radio, Bluetooth radio functions, and cellular using the CDMA/GSM 2G/3G/LTE data radio functions.

MODEL: A1403

SERIAL NUMBER: PT667496, PT654922

DATE TESTED: SEPTEMBER 22-NOVEMBER 2, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



FRANK IBRAHIM
EMC SUPERVISOR
UL CCS

CHIN PANG
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, and FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Apple iPad, Model A1403 is a tablet device with iPod functions (music, application support, and video), 802.11a/b/g/n radio, Bluetooth radio functions, and cellular using the CDMA/GSM 2G/3G/LTE data radio functions.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	GFSK	13.32	21.48
2402 - 2480	DQPSK	13.15	20.65
2402 - 2480	8PSK	13.54	22.59

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PiFA antenna, with a maximum gain of -0.26 dBi.

5.4. SOFTWARE AND FIRMWARE

The EUT software installed during testing was Broadcom WL_tool.

The EUT is also linked in Bluetooth Enable Test mode with Rohde & Schwarz CBT Test box.

5.5. WORST-CASE CONFIGURATION AND MODE

For Radiated Emissions below 1 GHz and Power line Conducted Emissions, the channel with the highest conducted output power was selected as worst-case scenario.

EUT is a portable device that has three orientations; therefore, X Y and Z orientations have been investigated, and the worst case was found to be at Z position.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
BT Tester	Rohde & Schwarz	CBT	12/17/2174	NA
Splitter	NA	NA	NA	NA
Headset	Apple	NA	NA	NA

I/O CABLES (CONDUCTED)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	In/Out	1	SMA	Shielded	0.2m	NA
2	In/Out	1	SMA	Shielded	0.6m	NA
3	Antenna Port	1	SMA	Shielded	0.1m	To BT tester


I/O CABLES (RADIATED)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	US115VAC	Shielded	2m	NA
2	DC	1	DC	Shielded	1m	NA
3	Audio	1	Earphone	Shielded	0.5m	NA
4	Antenna Port	1	Monopole Antenna	Un-shielded	2m	NA


TEST SETUP

The EUT is a stand-alone device.

SETUP DIAGRAM FOR TESTS (CONDUCTED)

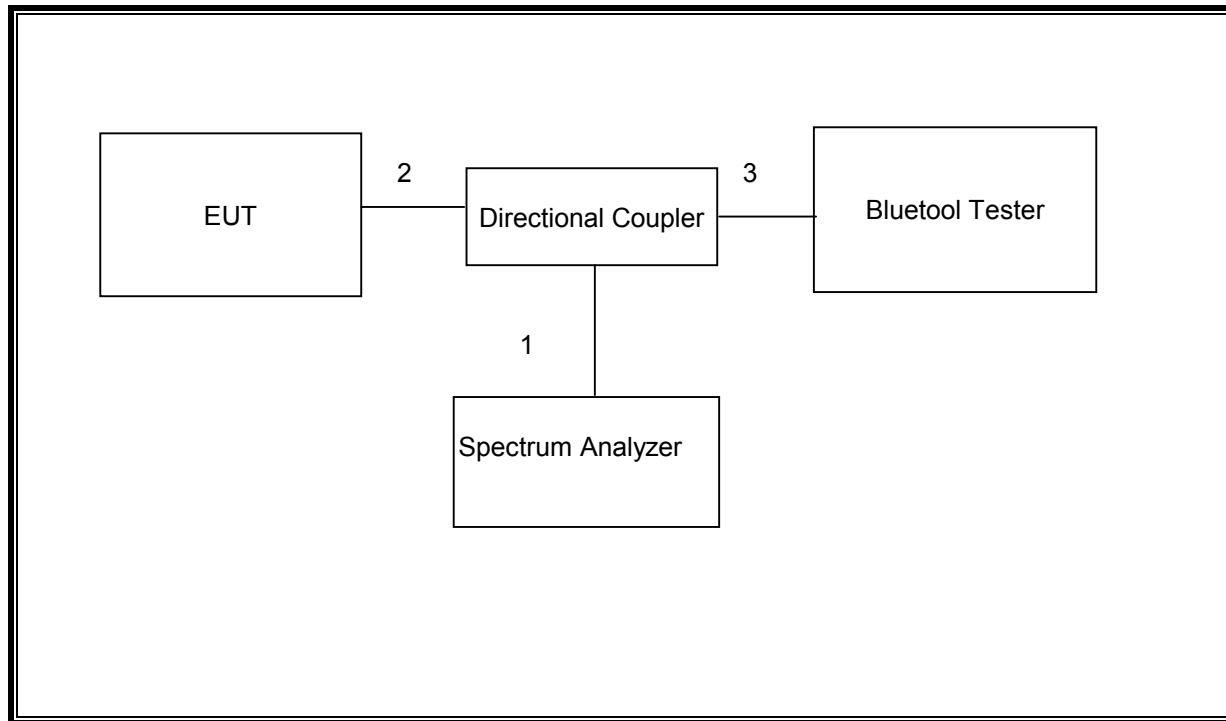

SETUP DIAGRAM FOR TESTS (RADIATED)

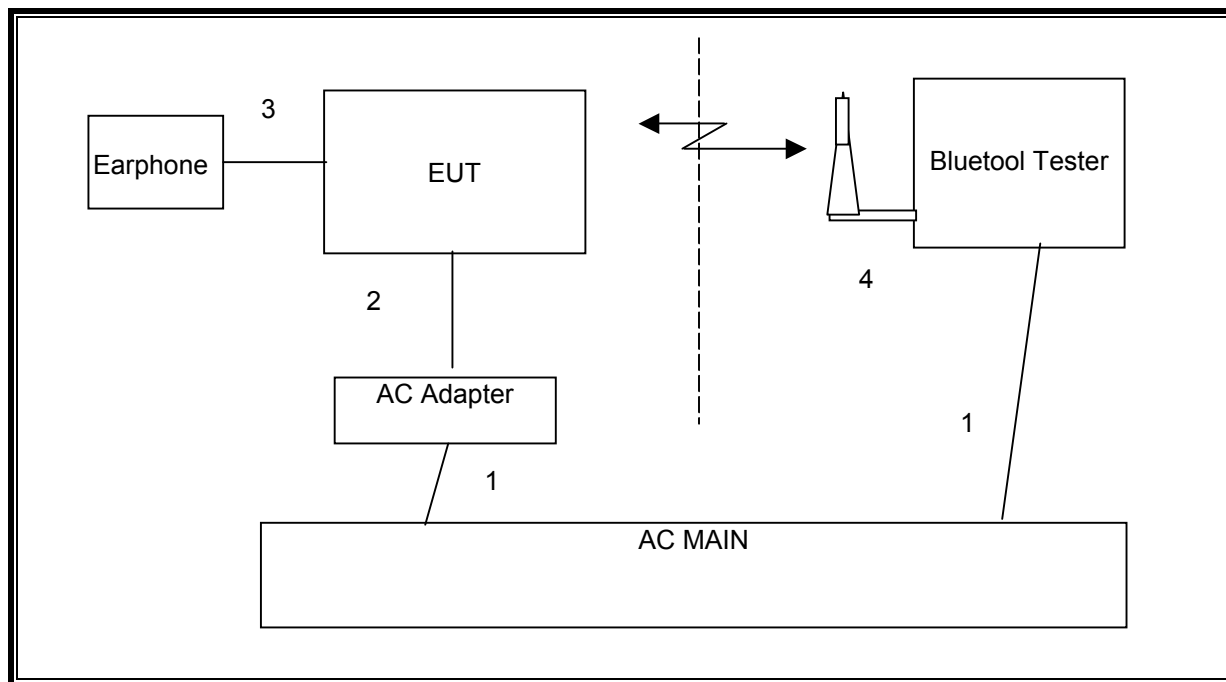

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01159	05/11/12
Antenna, Horn, 18 GHz	EMCO	3115	C00872	06/29/12
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	07/28/12
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	07/16/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	01/27/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	07/12/12
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	07/06/12
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/10/12
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRM50702	N02685	CNR
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	01/07/12
Peak Power Meter	Agilent / HP	E4416A	C00963	12/04/12
Bluetooth Tester	R&S	CBT	NA	05/01/12

7. ANTENNA PORT TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (KHz)	99% Bandwidth (KHz)
Low	2402	967.078	889.0143
Middle	2441	932.138	842.2283
High	2480	867.392	925.9322


20 dB BANDWIDTH

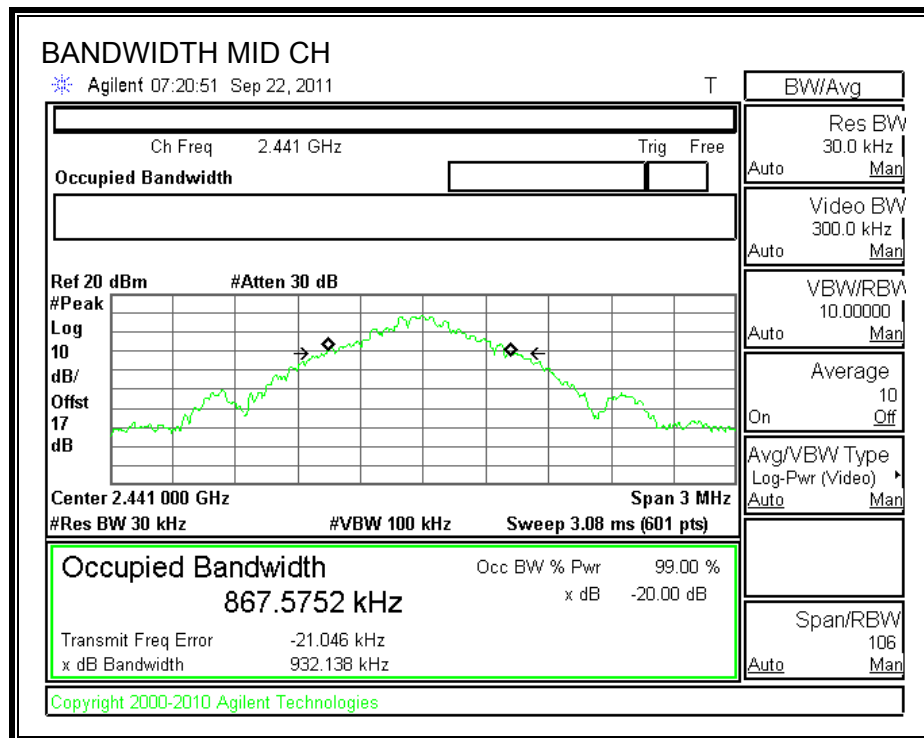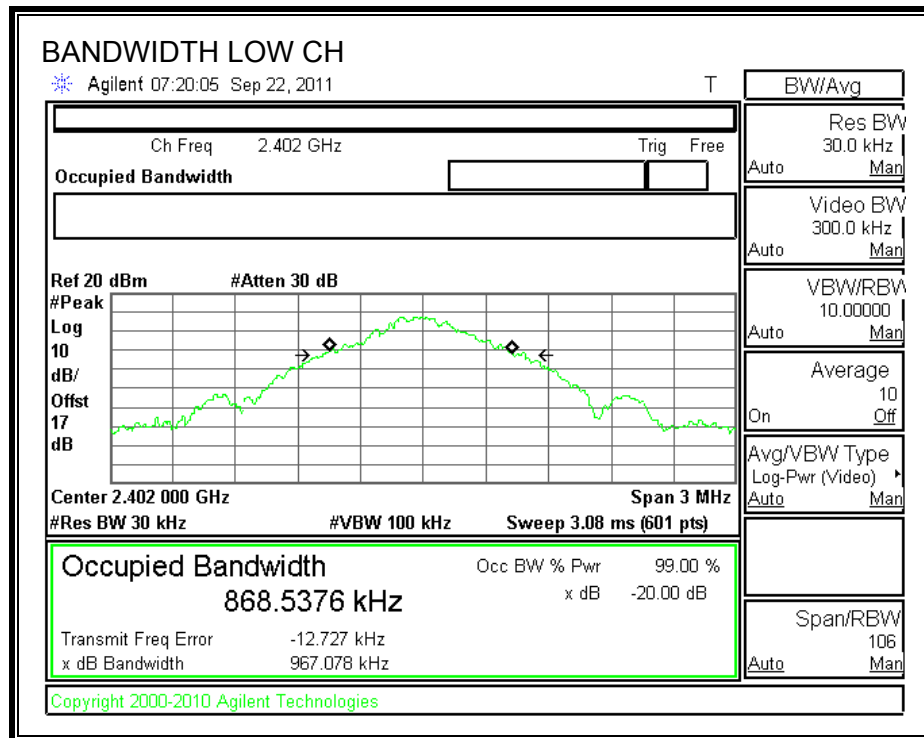

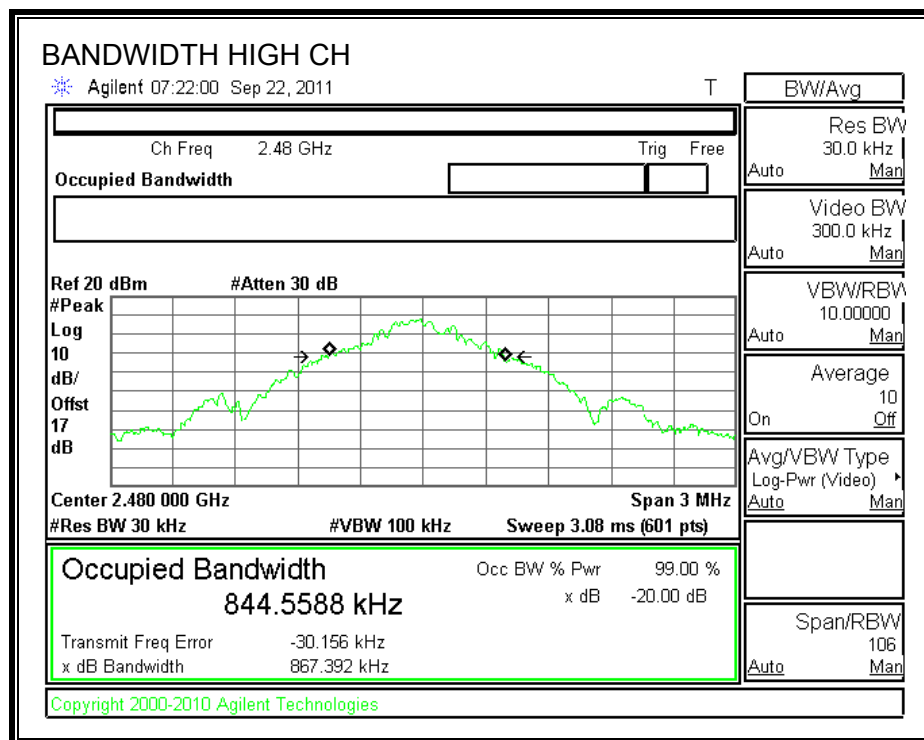

99% BANDWIDTH

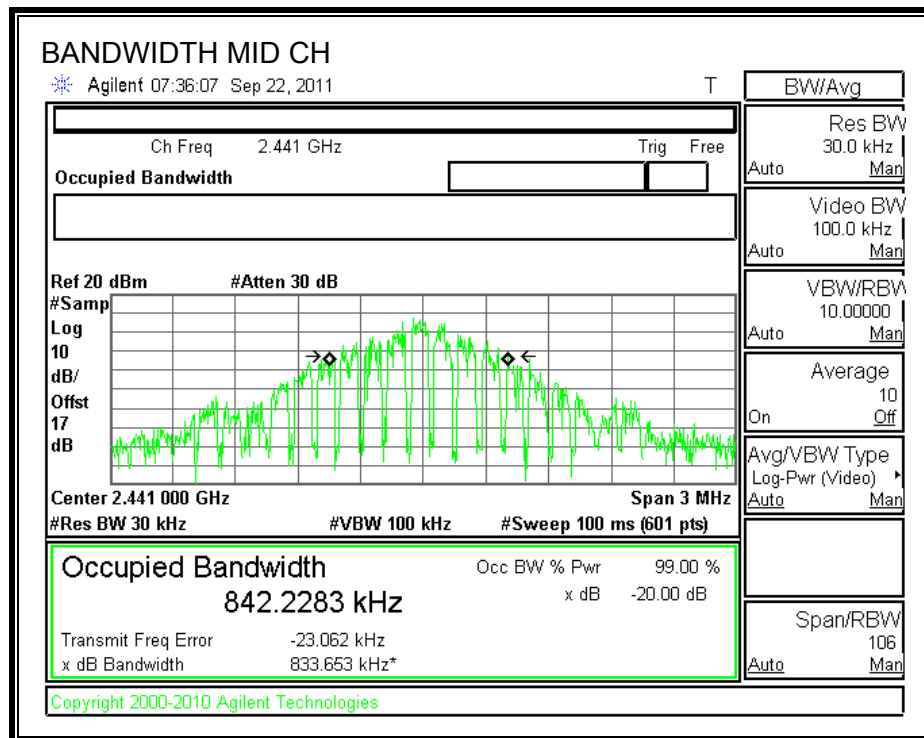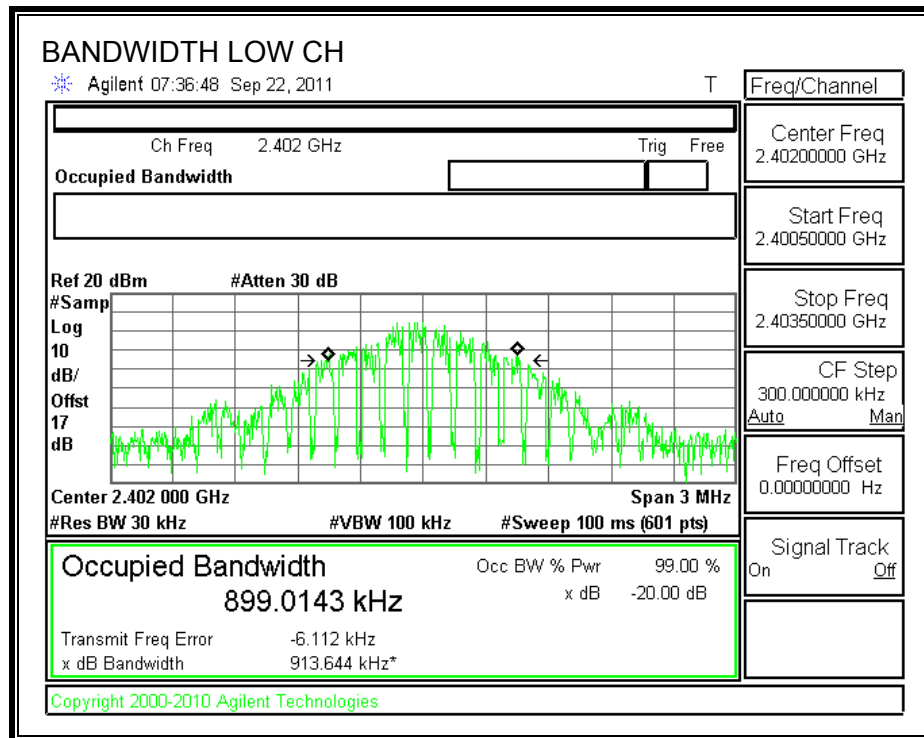

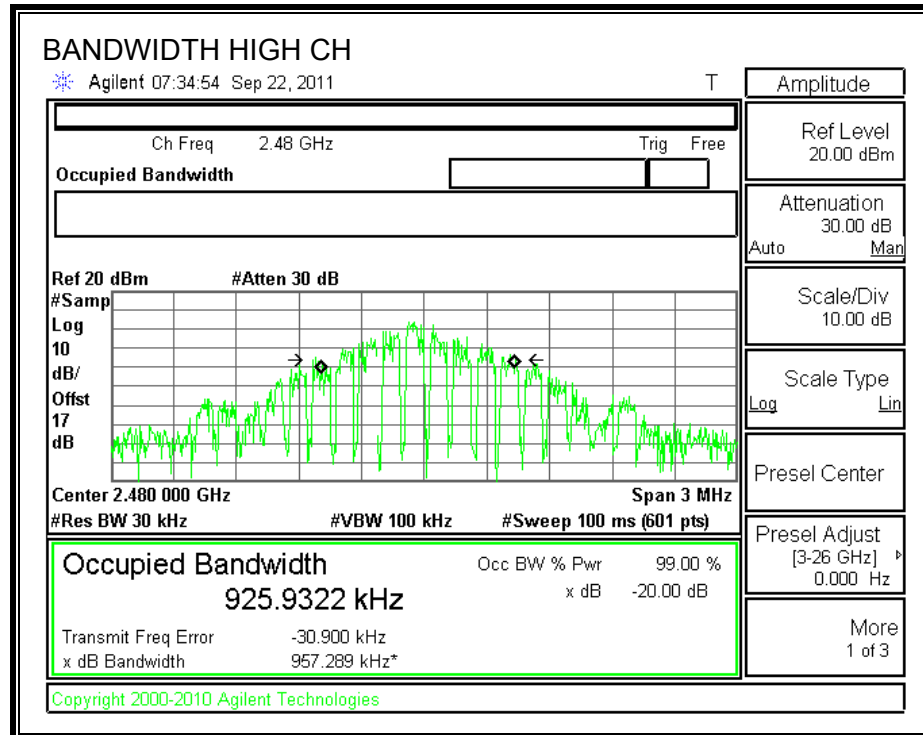

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

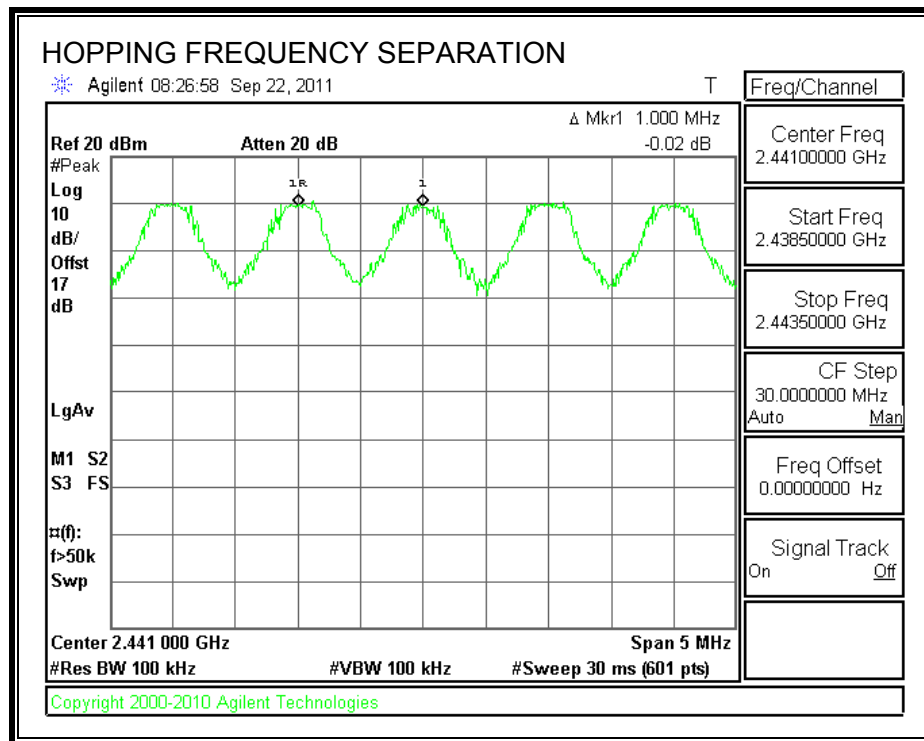

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

79 Channels observed.

NUMBER OF HOPPING CHANNELS

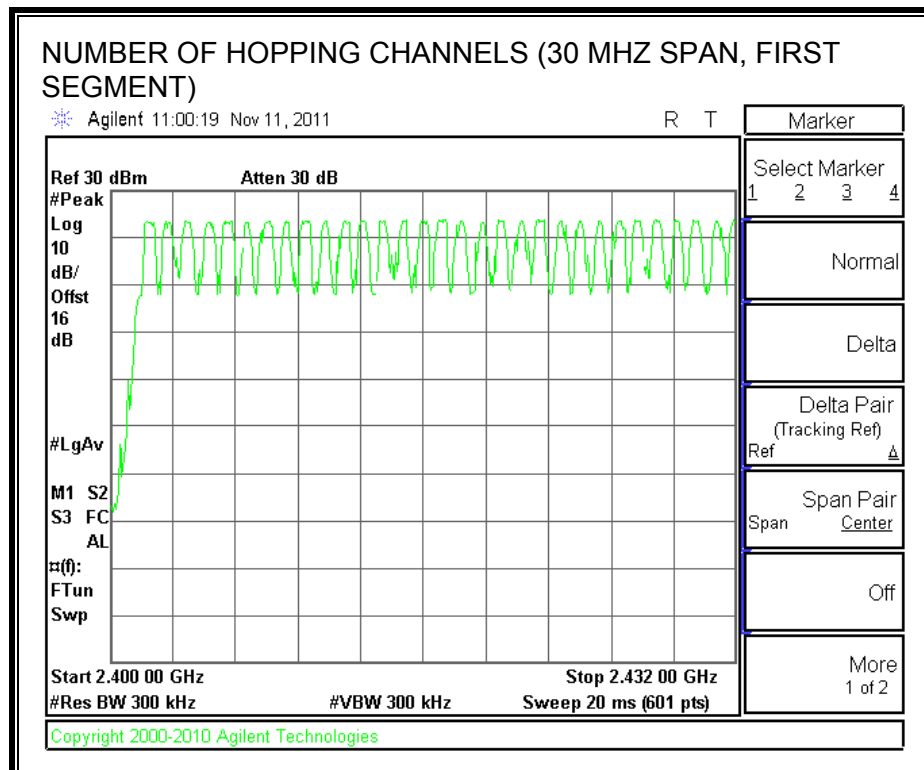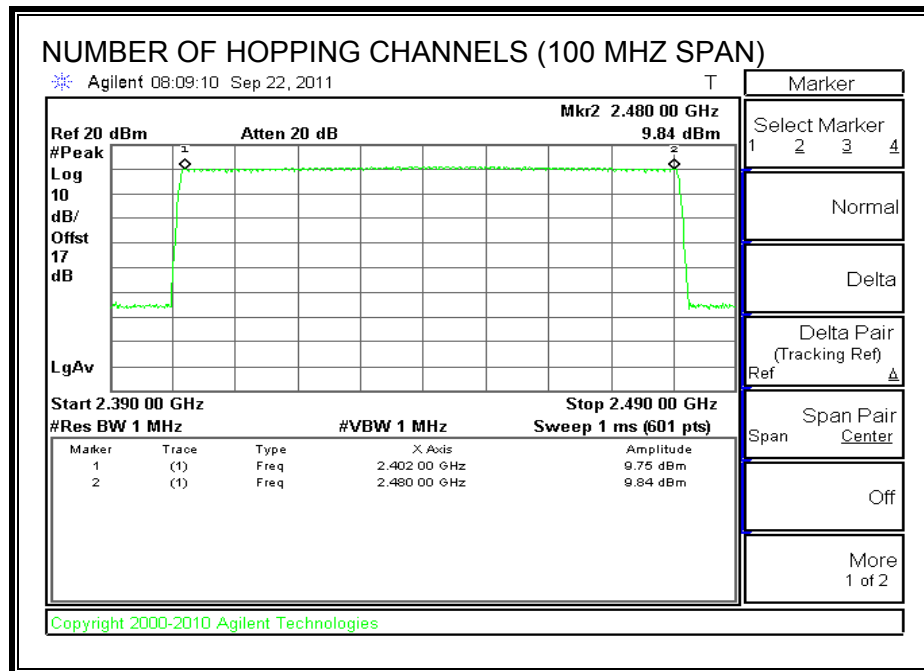

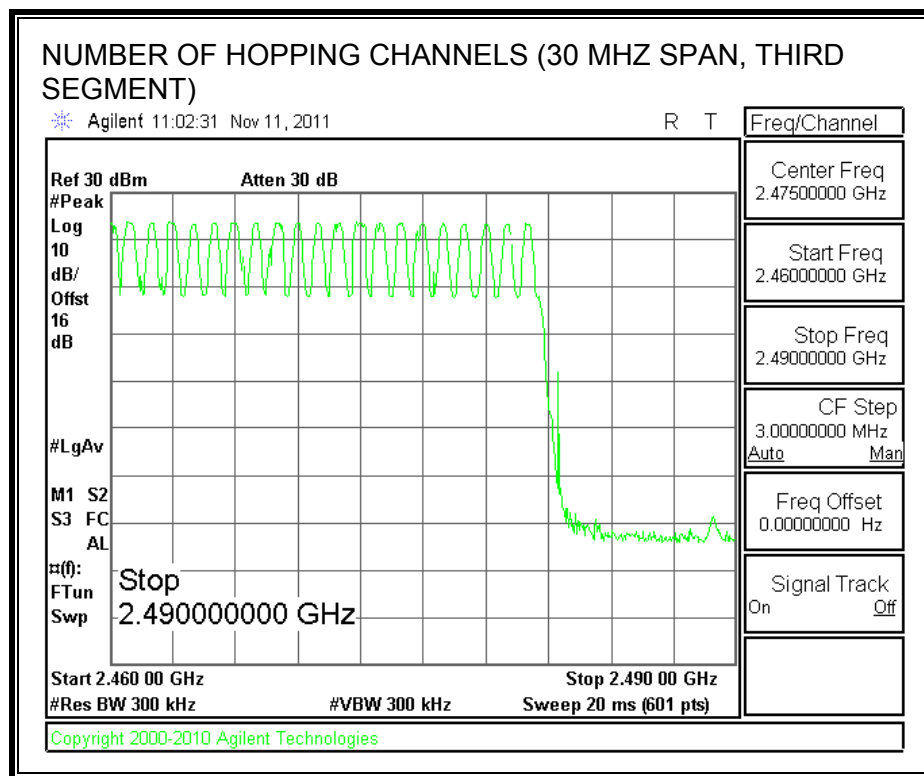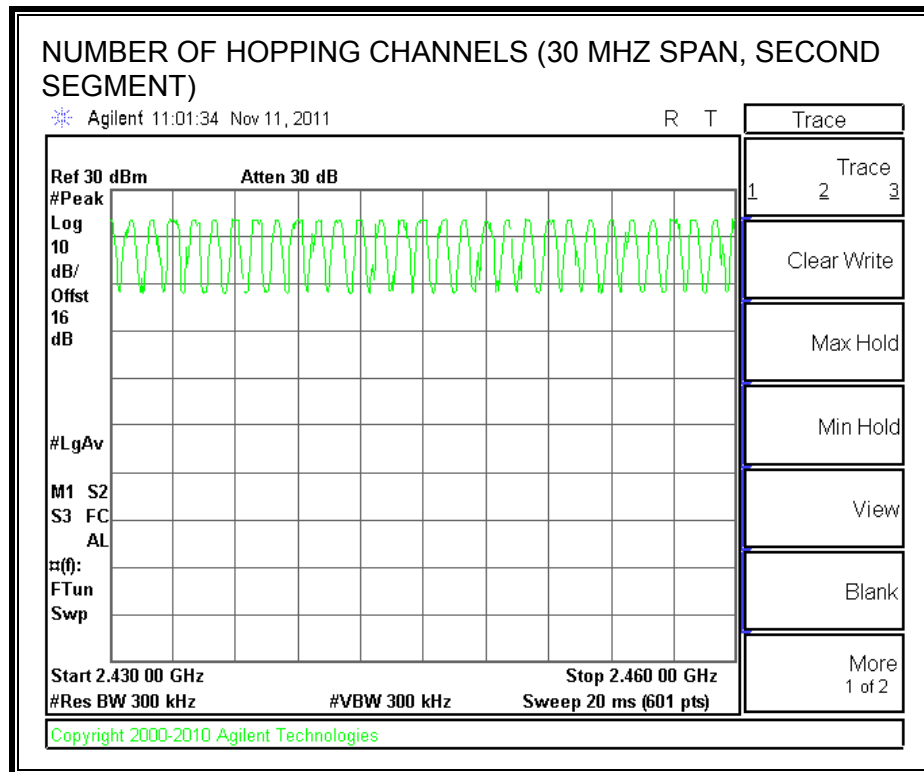

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

RESULTS


GFSK Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.390	32	0.125	0.4	-0.275
DH3	1.642	18	0.296	0.4	-0.104
DH5	2.883	13	0.375	0.4	-0.025


PULSE WIDTH GFSK DH1

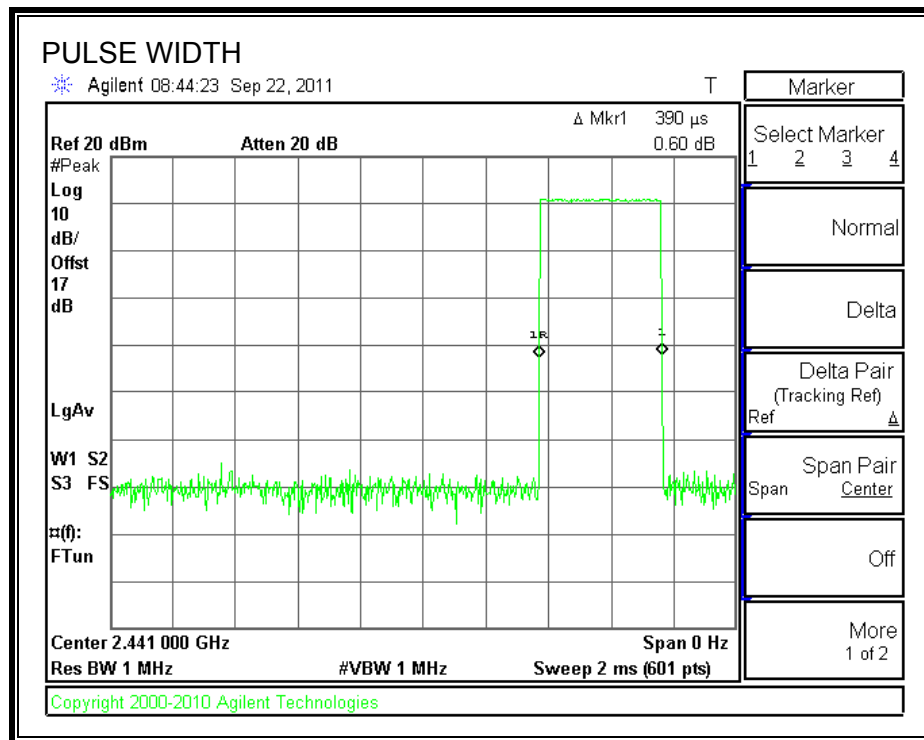


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

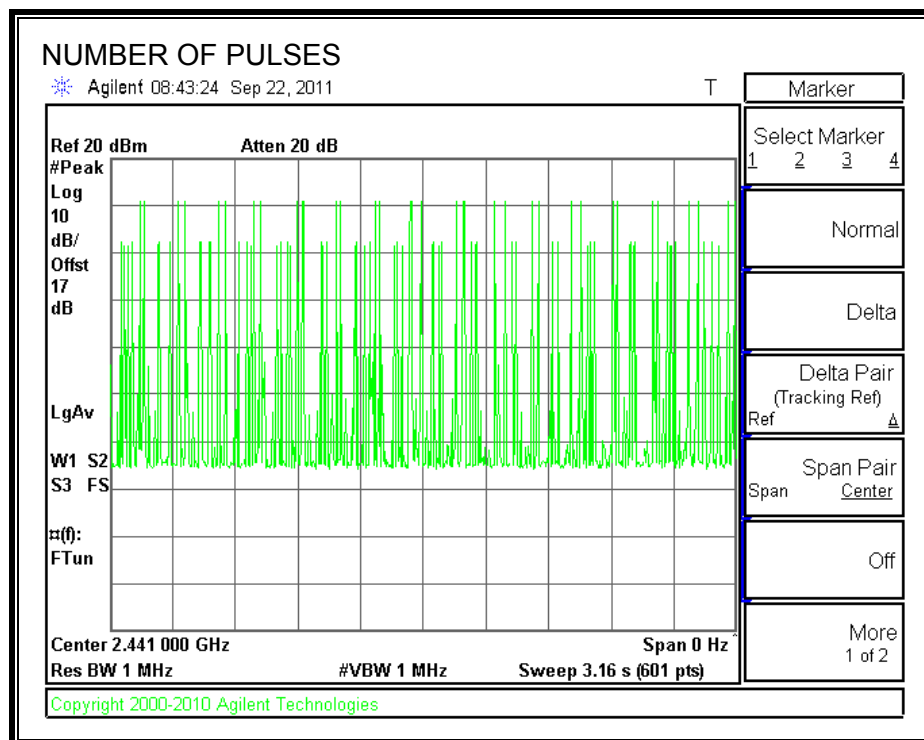


PULSE WIDTH GFSK DH3

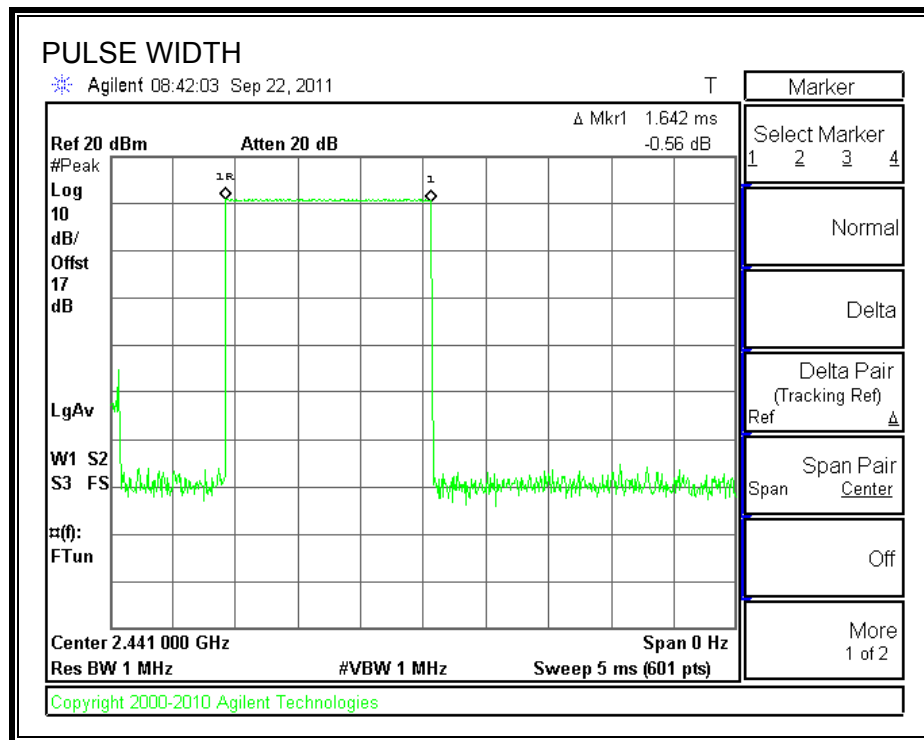


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

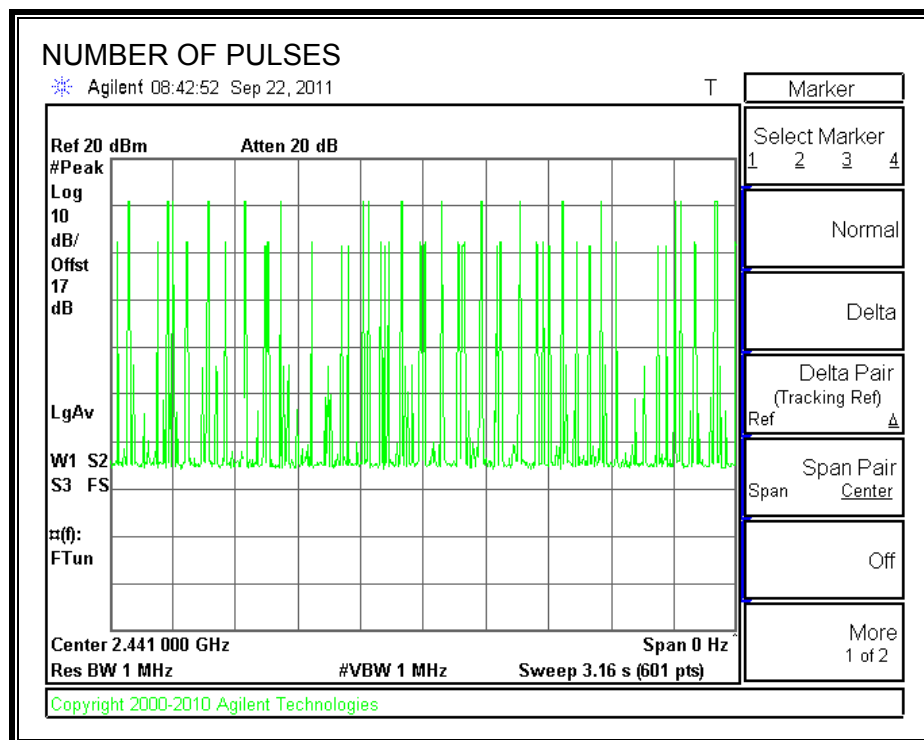

PULSE WIDTH GFSK DH5

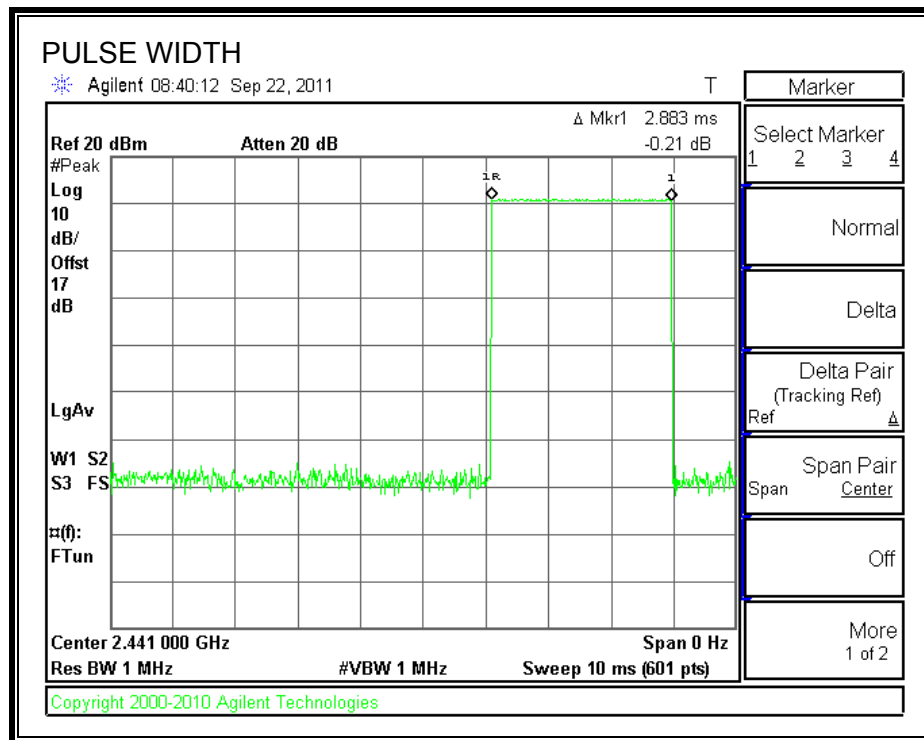

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

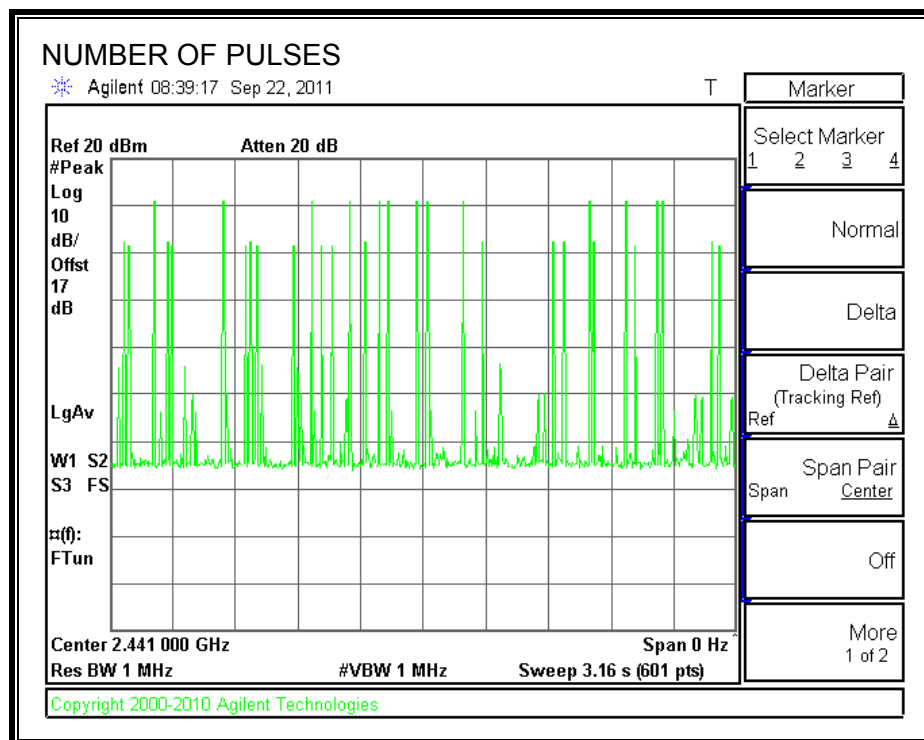

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	13.32	30	-16.68
Middle	2441	12.97	30	-17.03
High	2480	11.94	30	-18.06

OUTPUT POWER

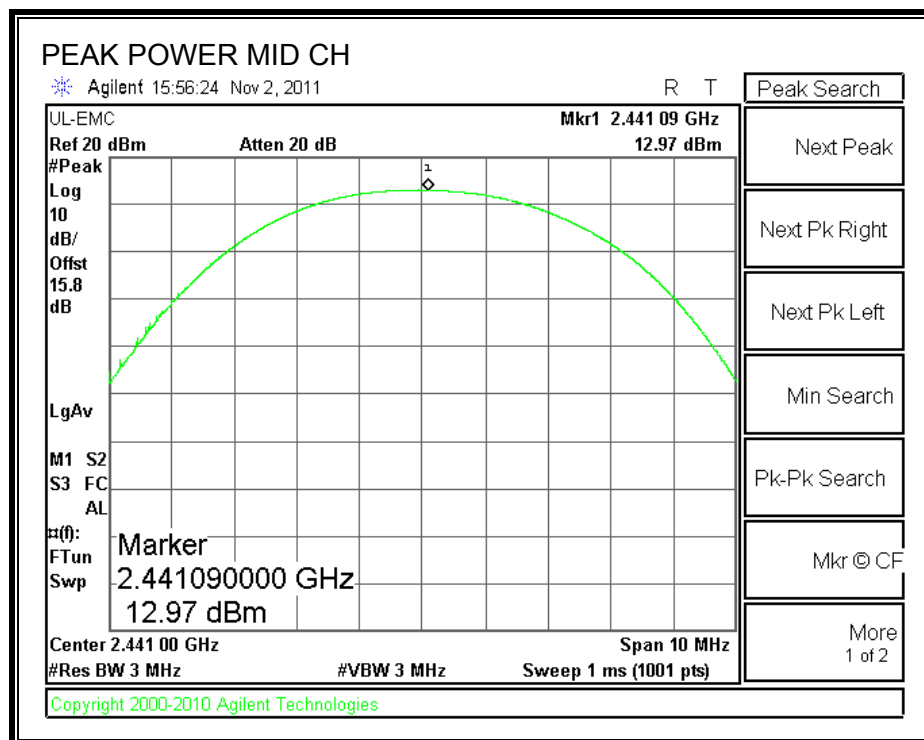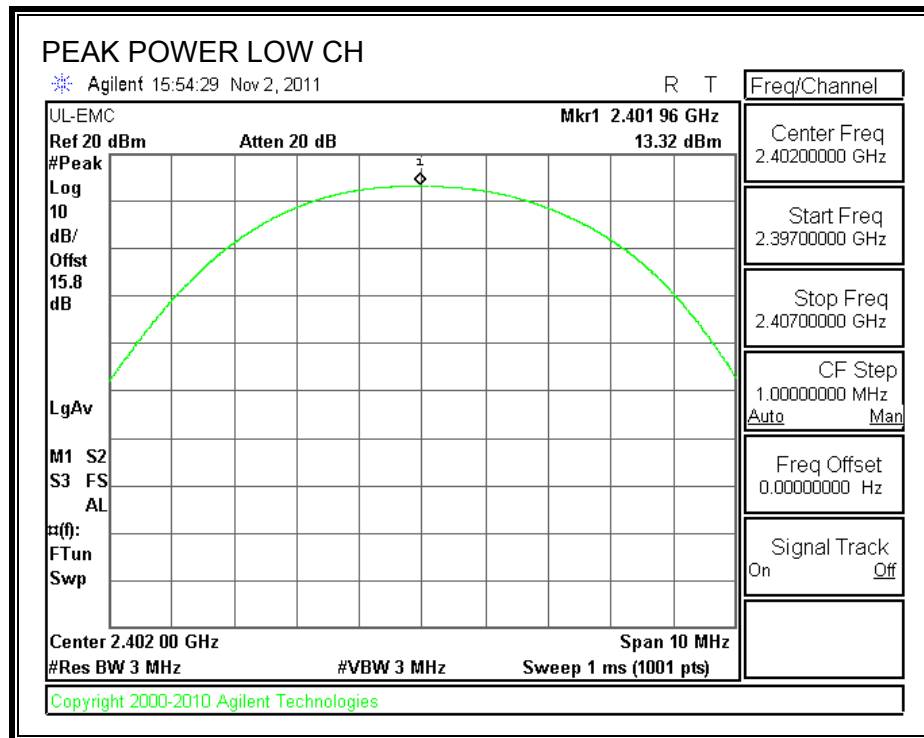

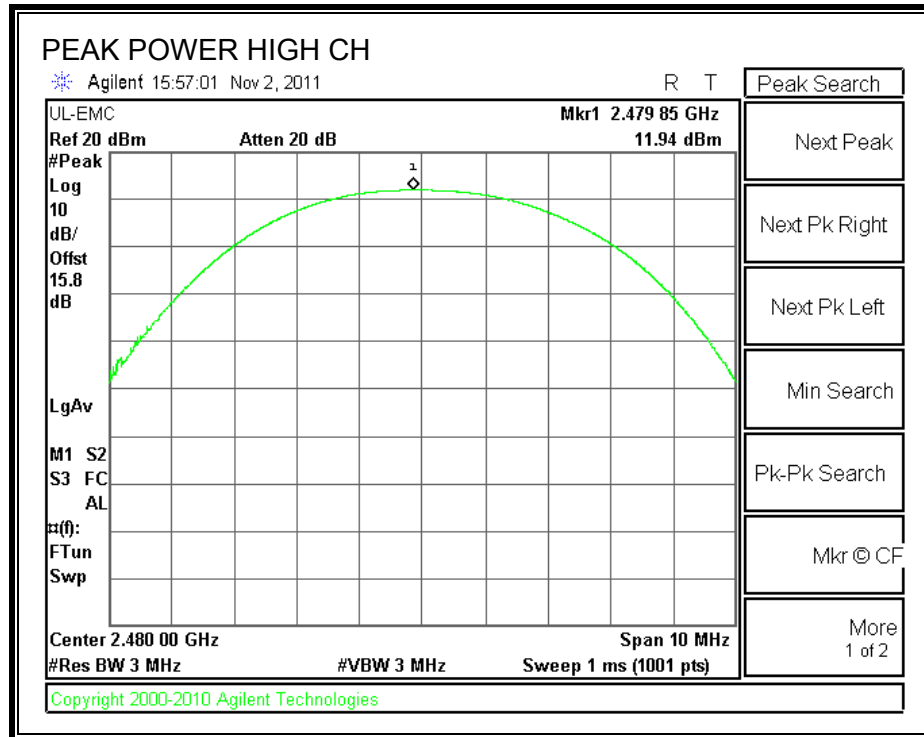

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.8 dB (including 10 dB pad and 0.8 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	11.90
Middle	2441	11.70
High	2480	10.80

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

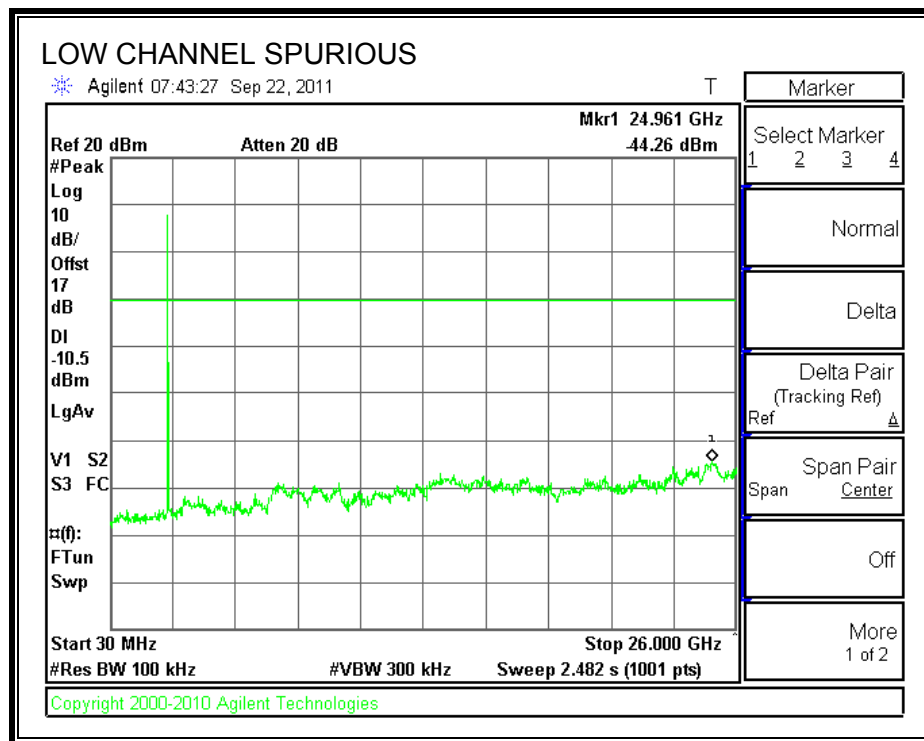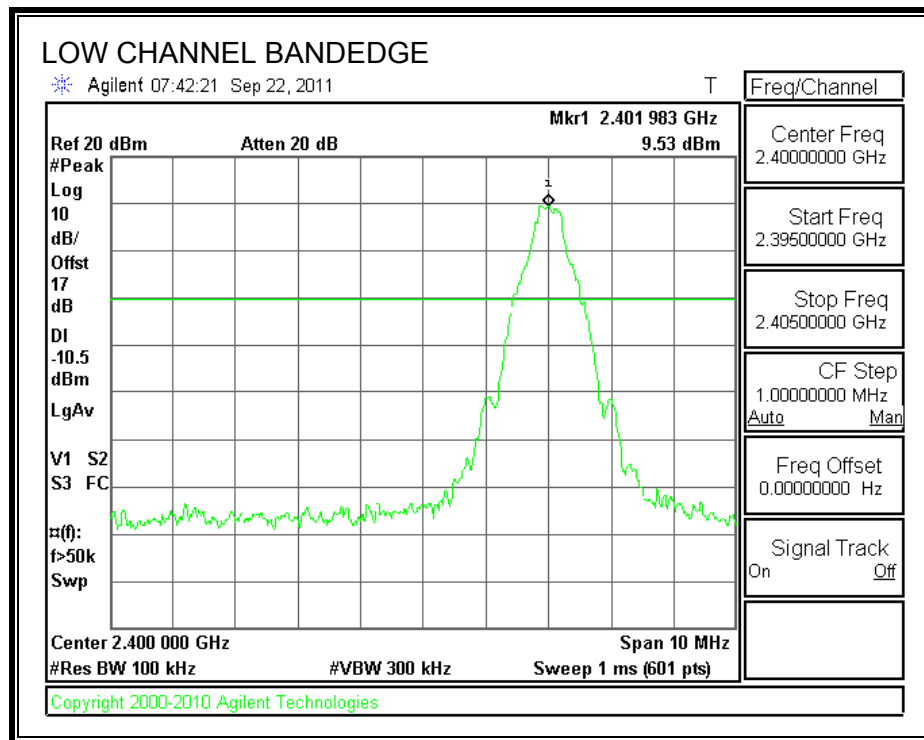



SPURIOUS EMISSIONS, MID CHANNEL

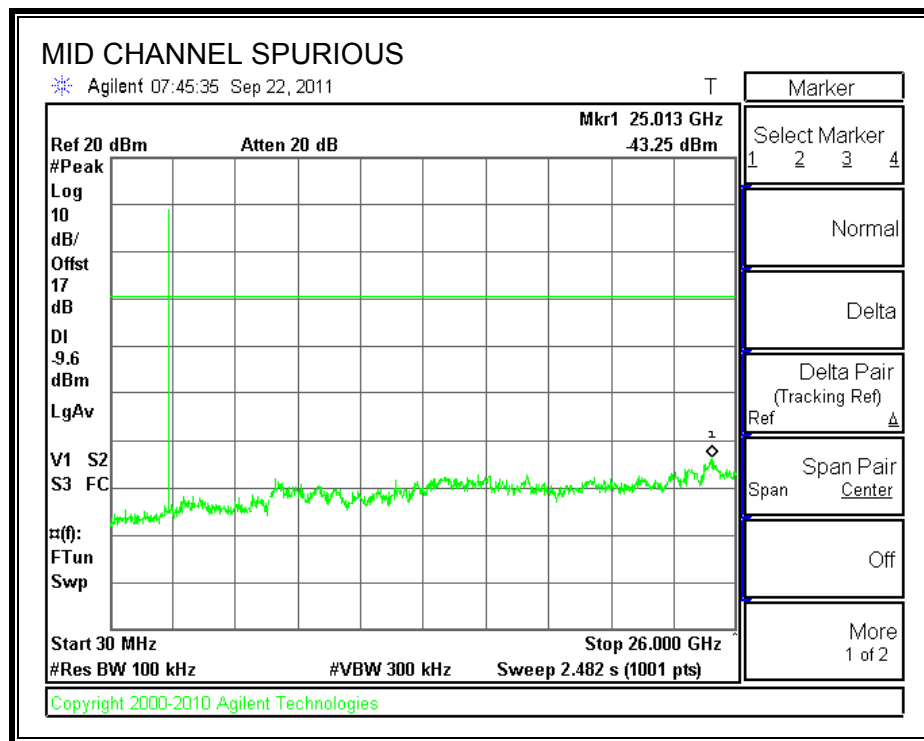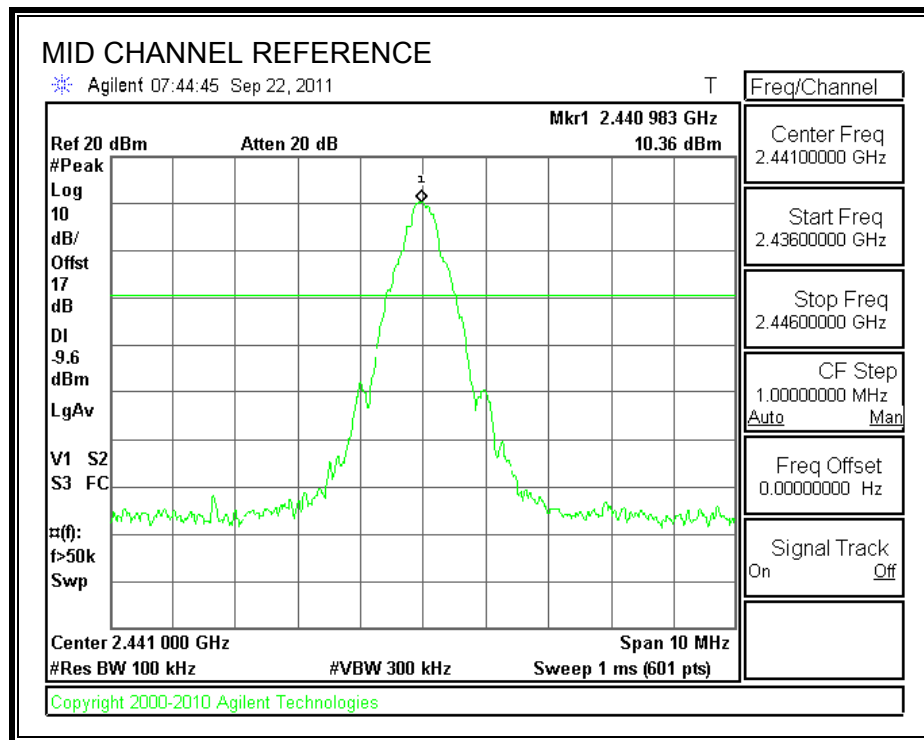

SPURIOUS EMISSIONS, HIGH CHANNEL

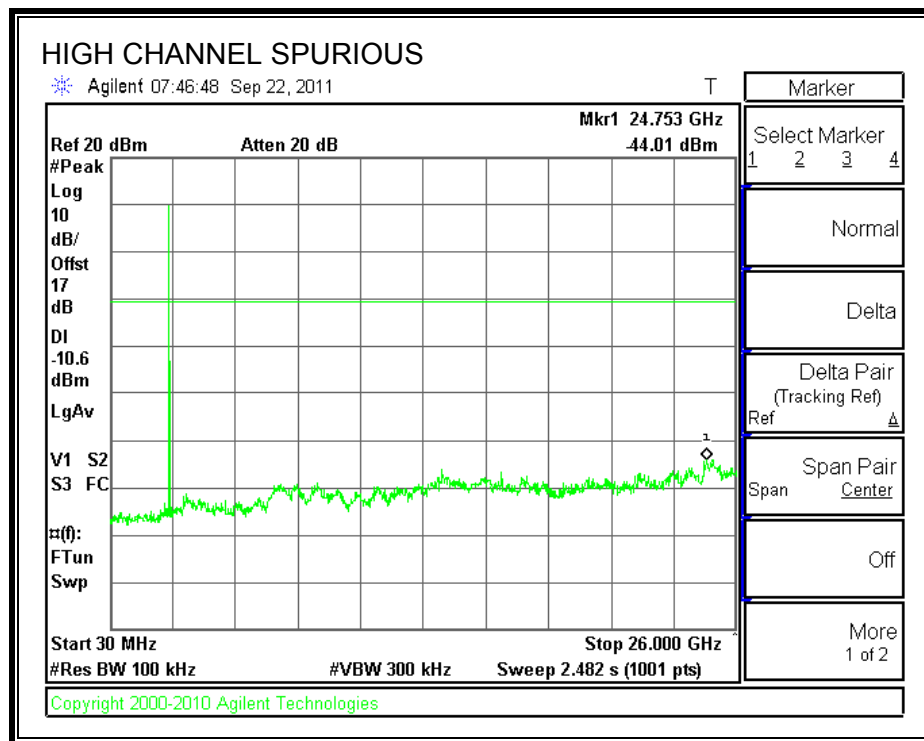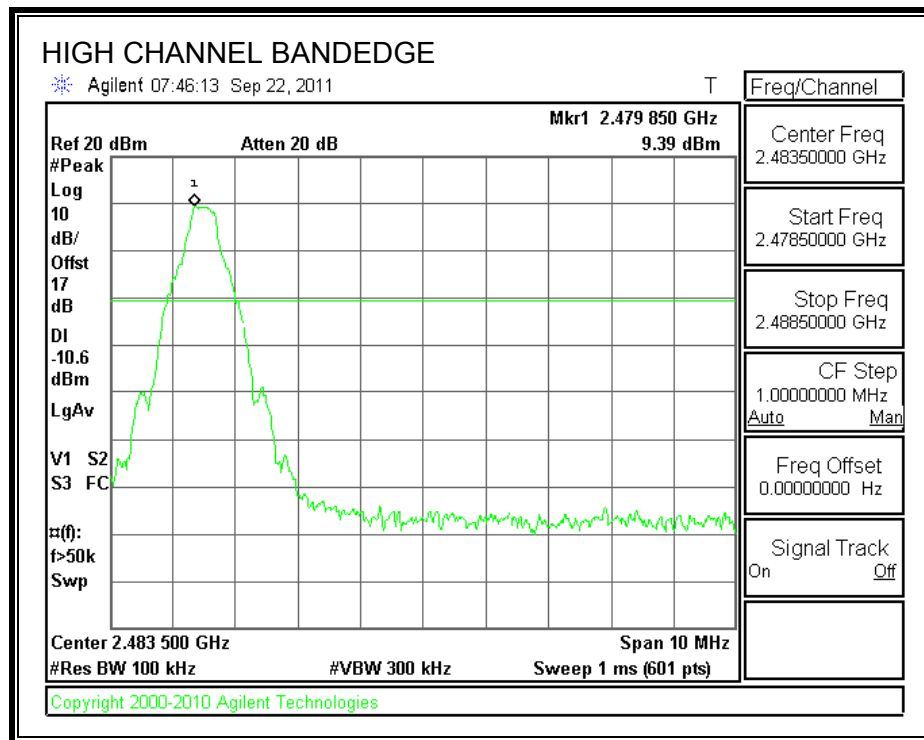

SPURIOUS BANEDGE EMISSIONS WITH HOPPING ON

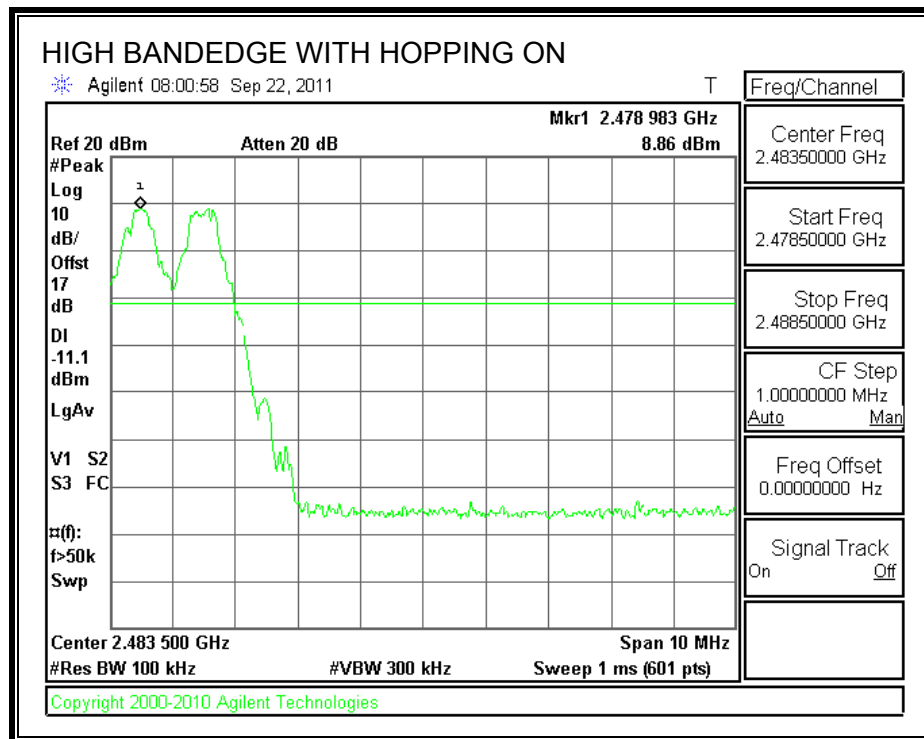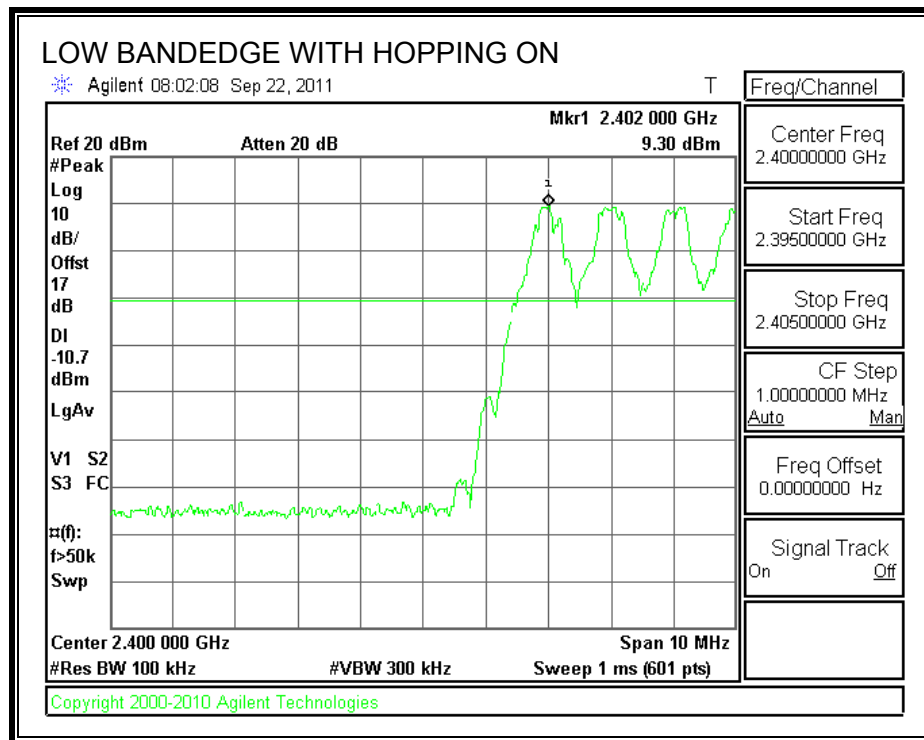

8. ENHANCED DATA RATE QPSK MODULATION

8.1.1. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	13.15	30	-16.85
Middle	2441	12.89	30	-17.11
High	2480	11.89	30	-18.11

OUTPUT POWER

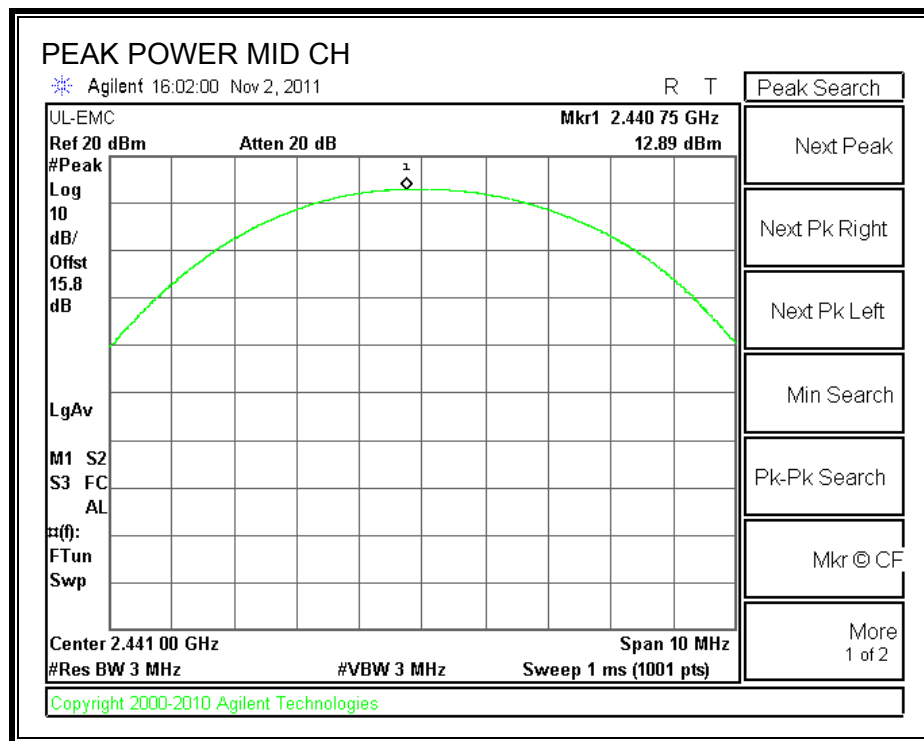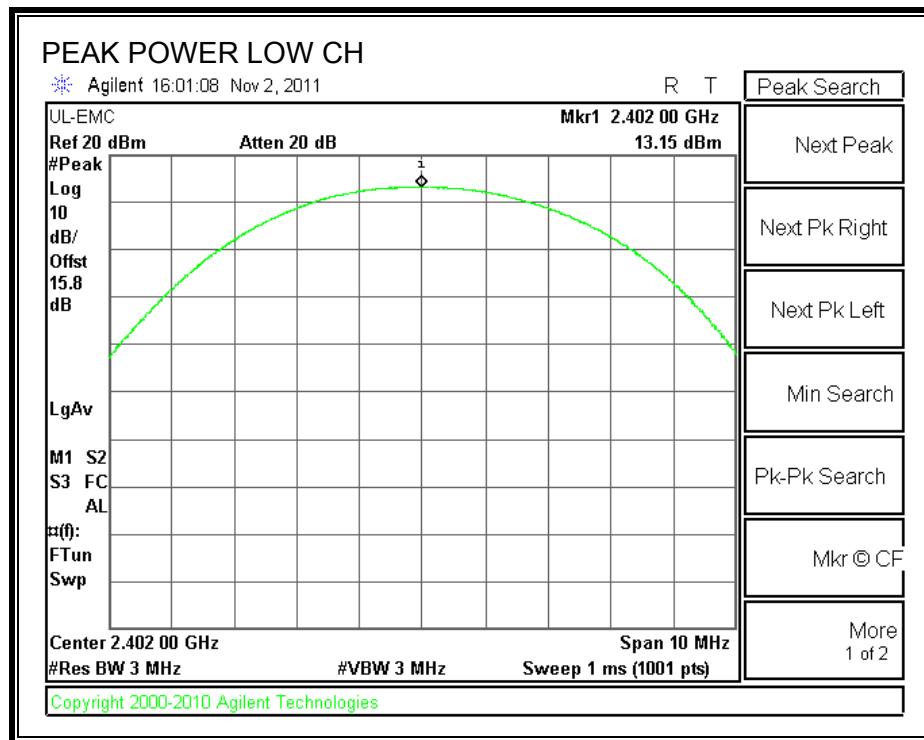

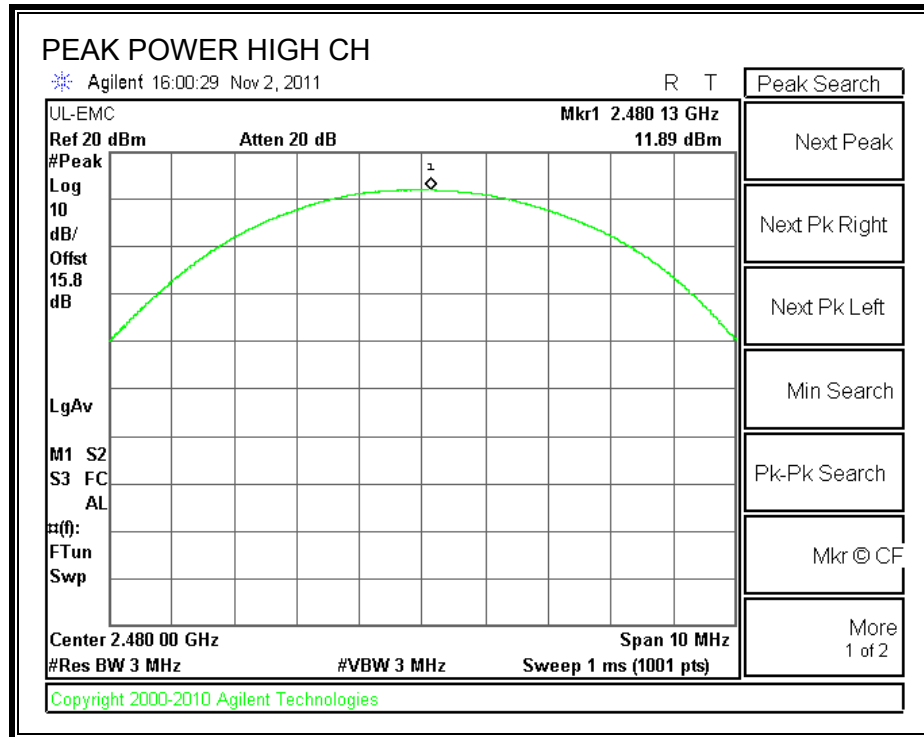

8.1.2. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.8dB (including 10 dB pad and 0.8dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	9.80
Middle	2441	10.00
High	2480	9.30

9. ENHANCED DATA RATE 8PSK MODULATION

9.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.324	1.2194
Middle	2441	1.313	1.2509
High	2480	1.335	1.2397


20 dB BANDWIDTH

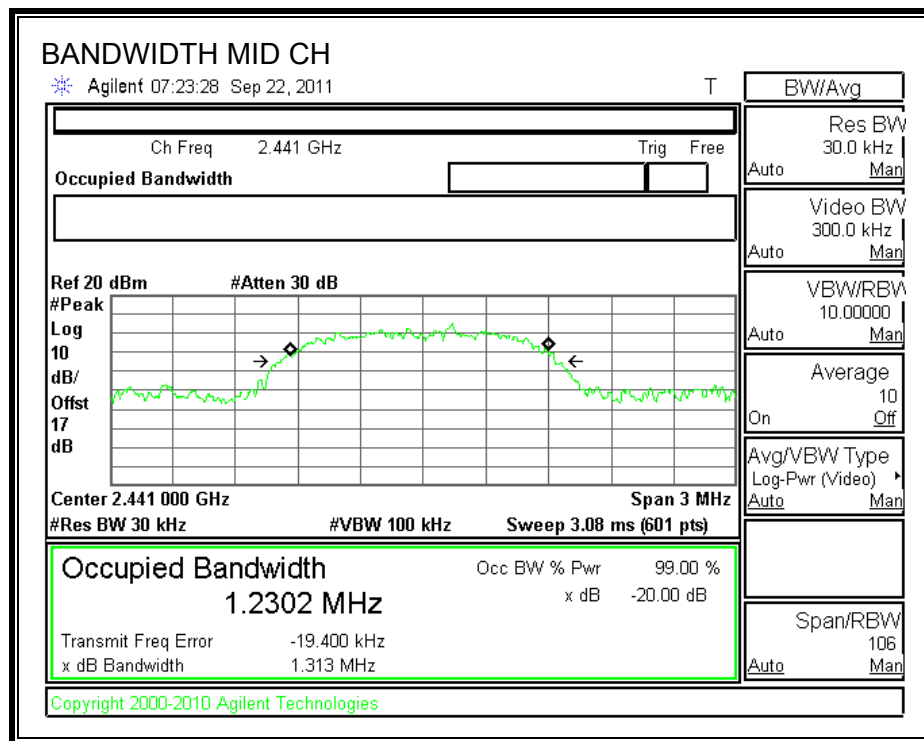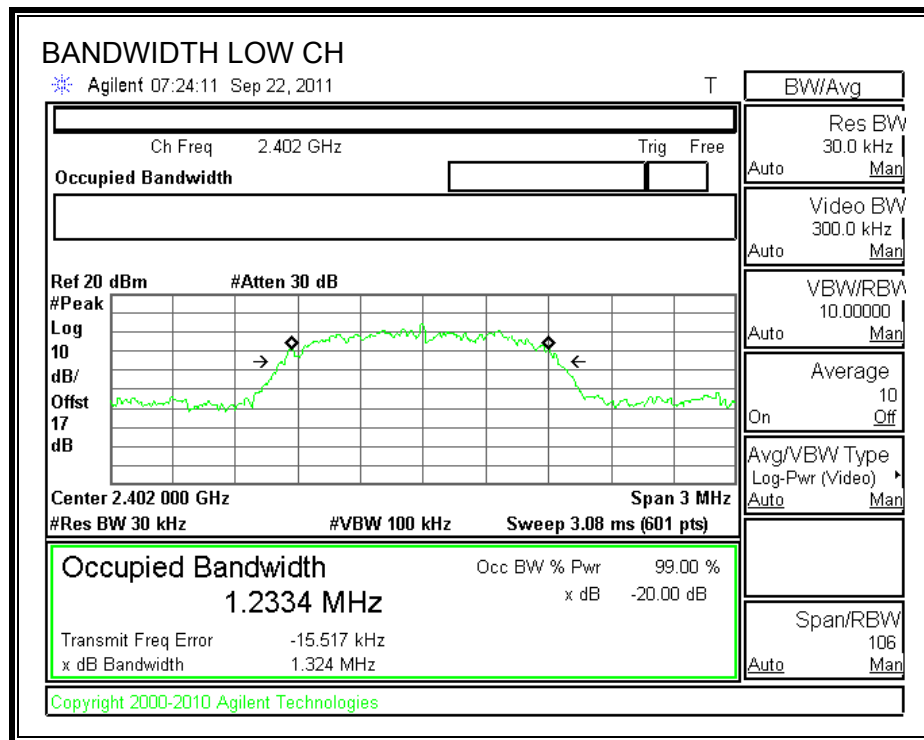

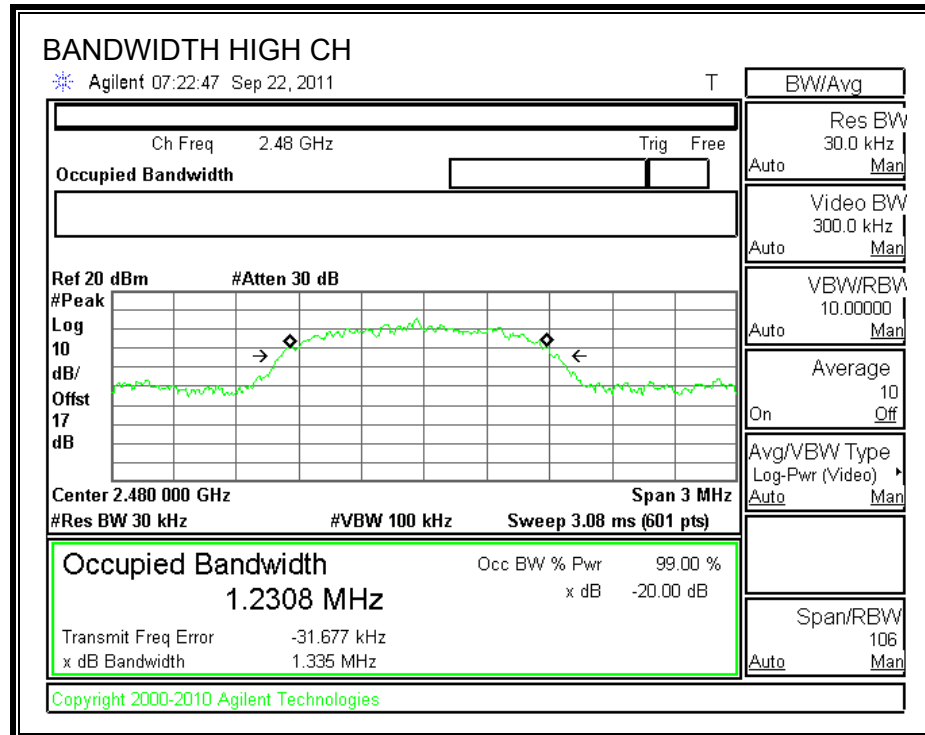

99% BANDWIDTH

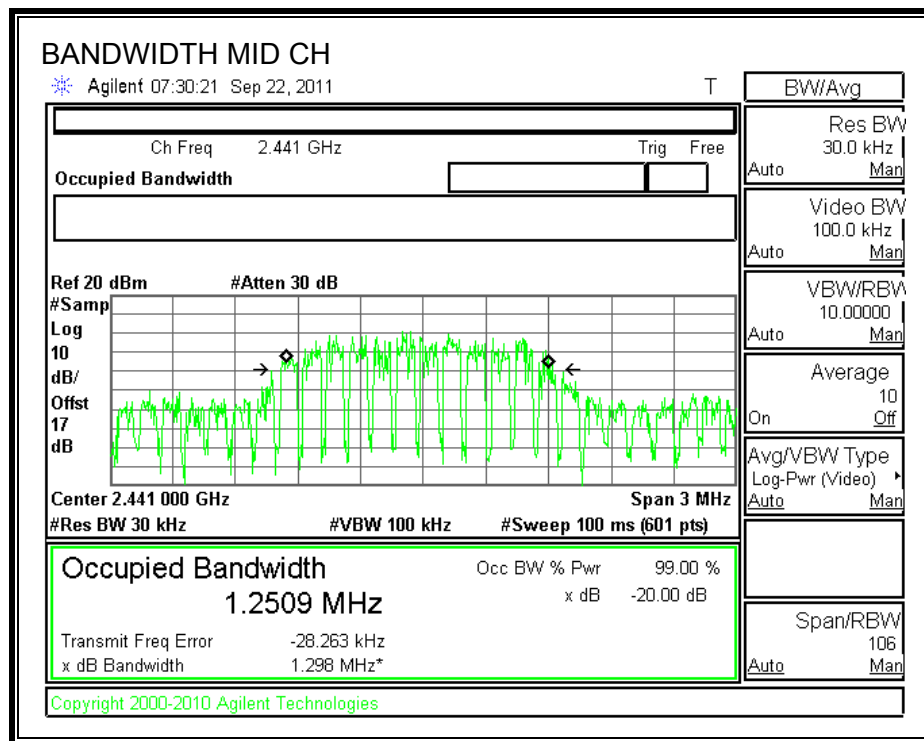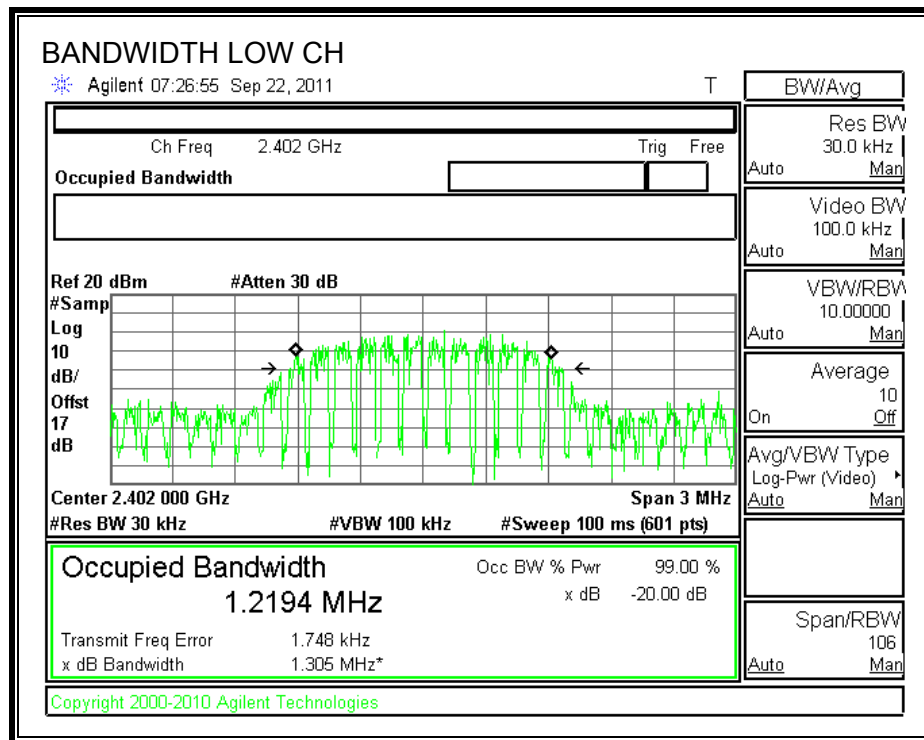

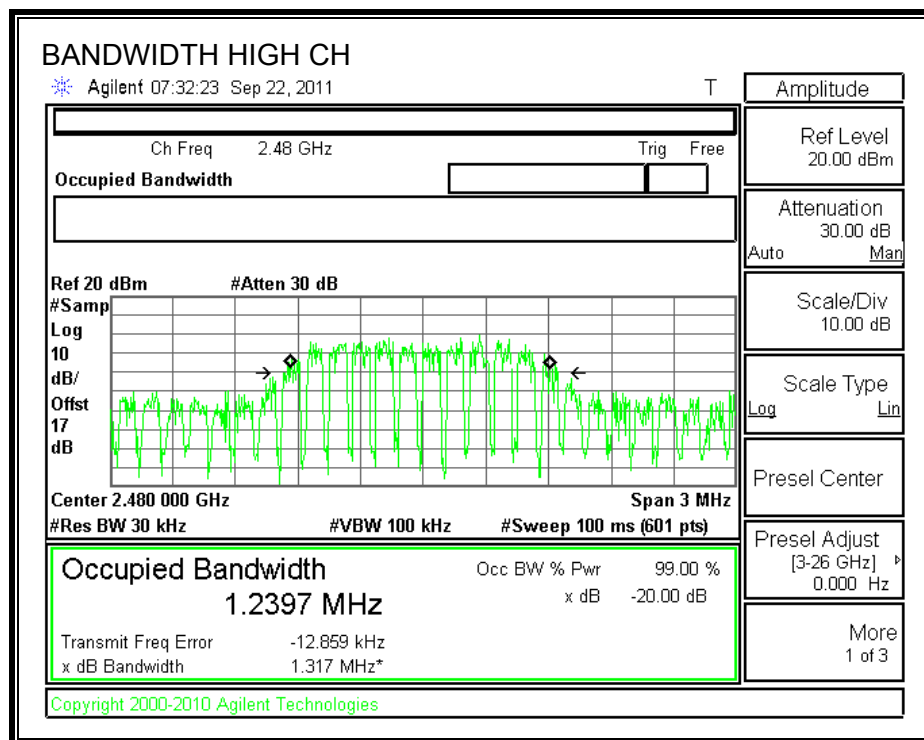

9.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

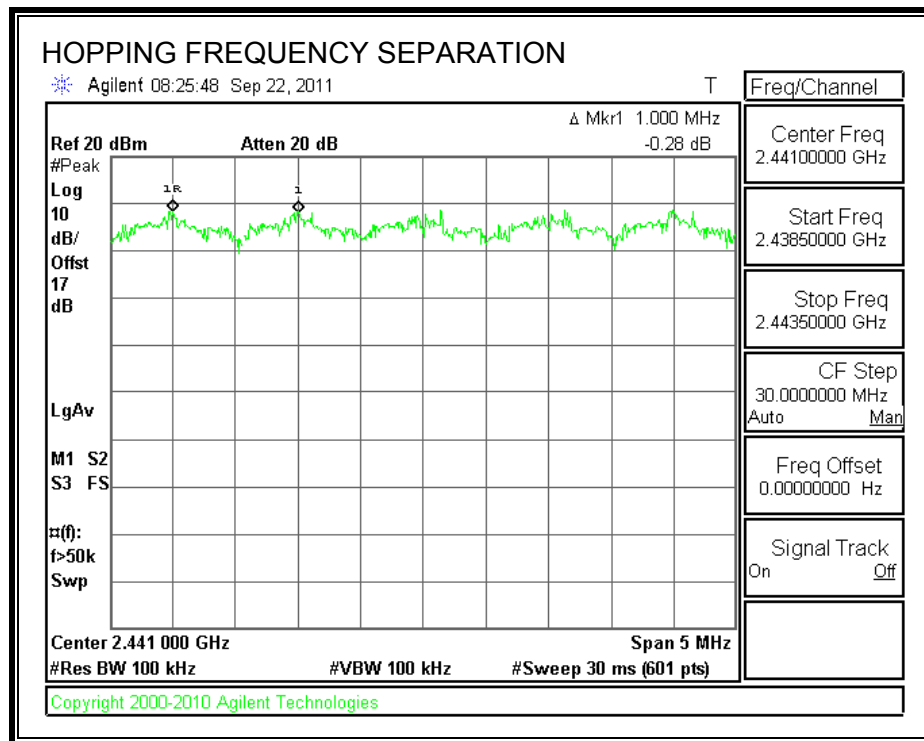

9.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

79 Channels observed.

NUMBER OF HOPPING CHANNELS

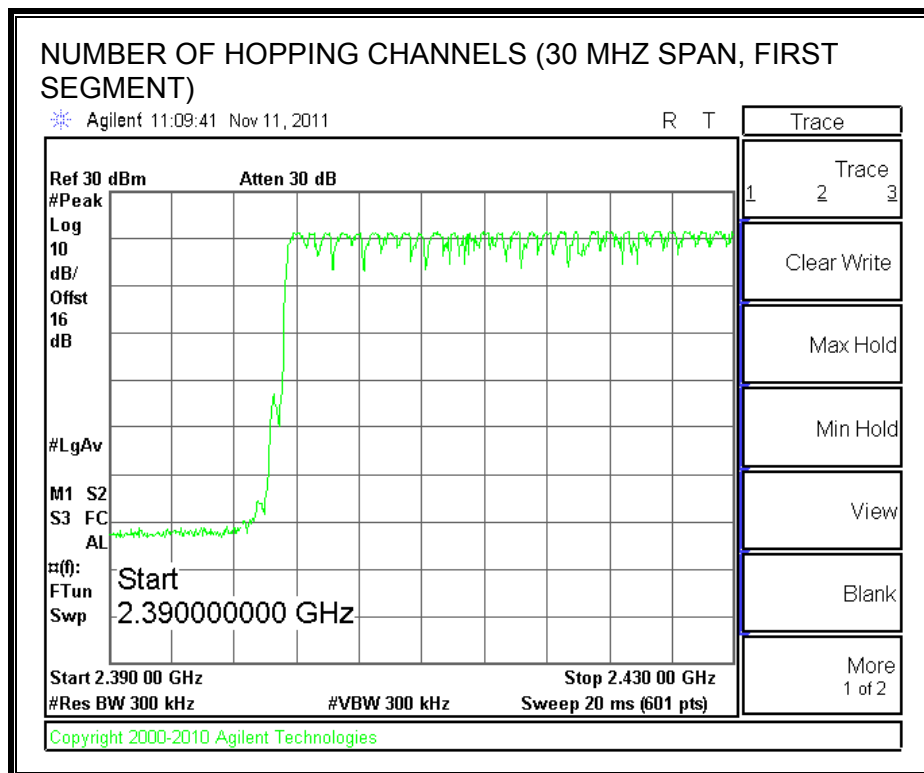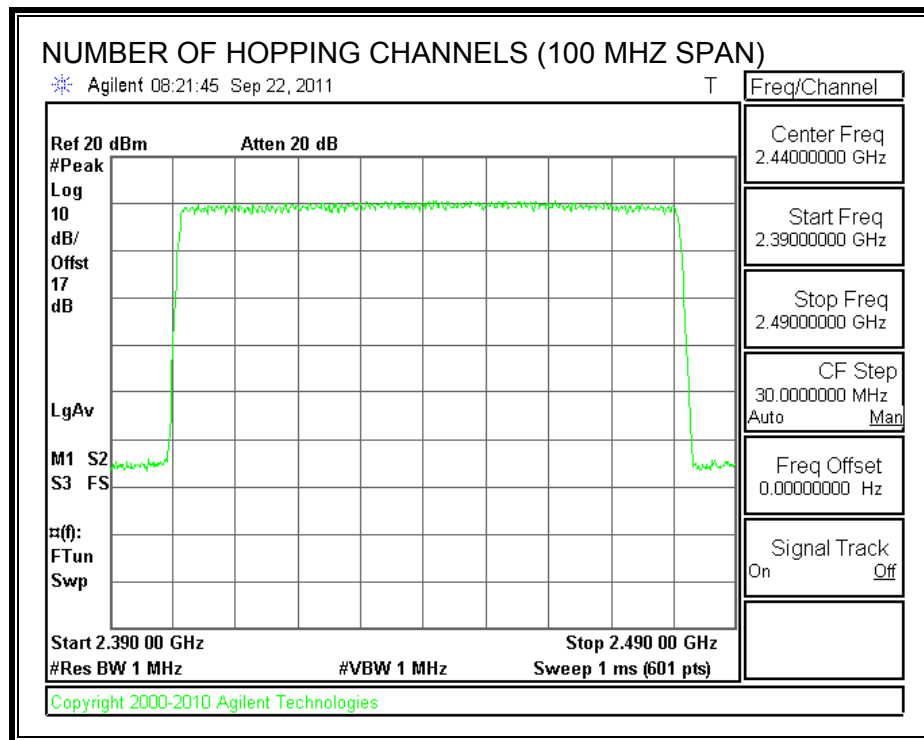

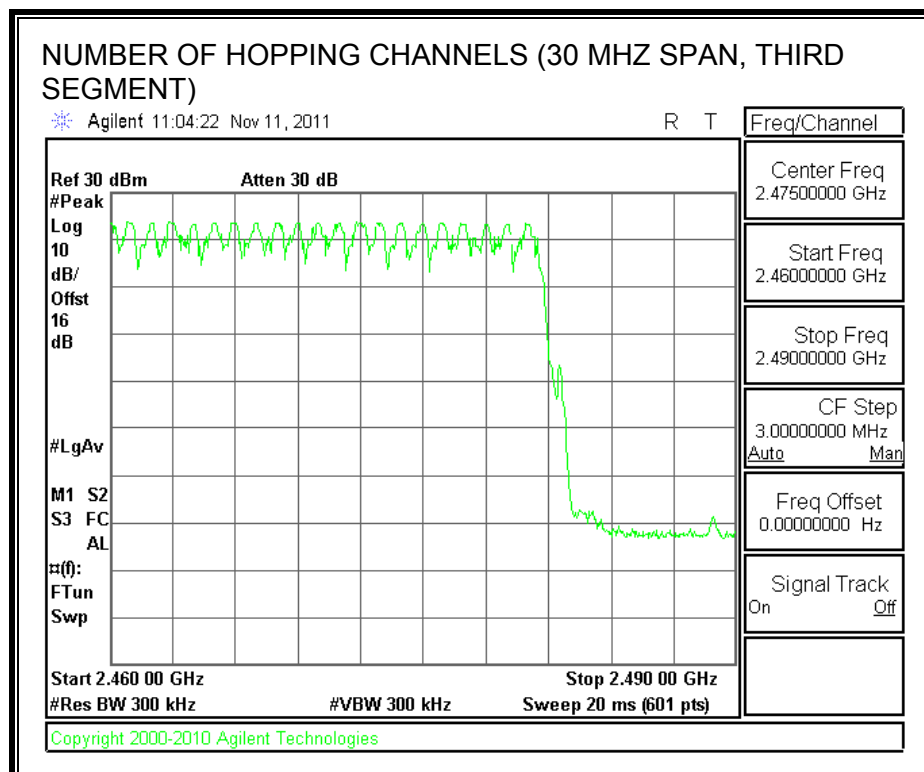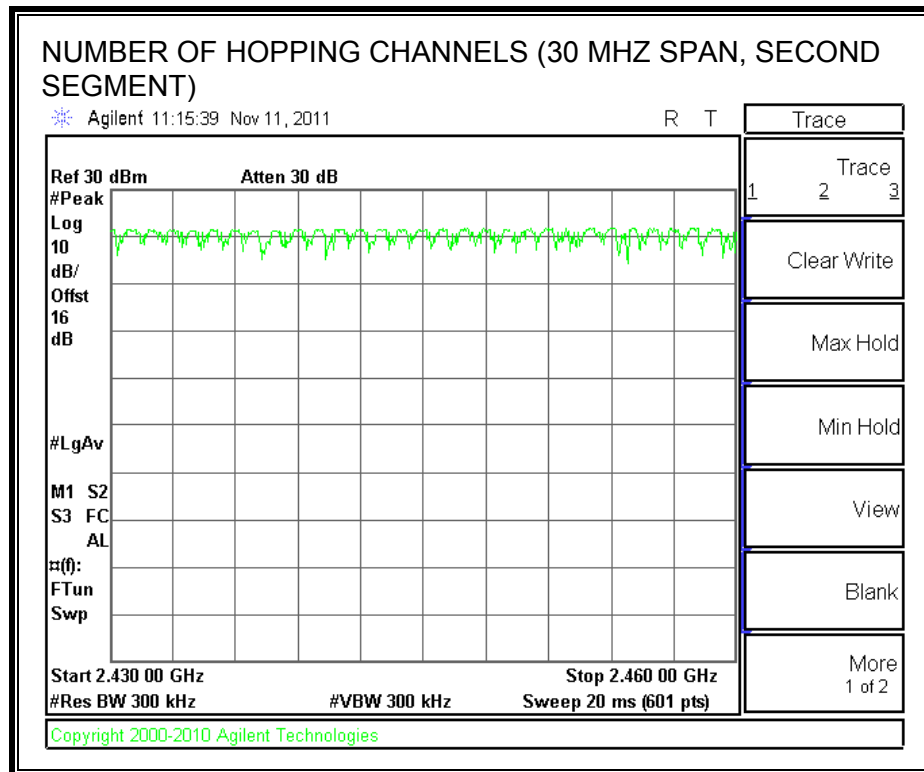

9.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

RESULTS


8PSK Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.3967	31	0.123	0.4	-0.277
DH3	1.6500	15	0.248	0.4	-0.153
DH5	2.9000	10	0.290	0.4	-0.110


PULSE WIDTH 8PSK DH1

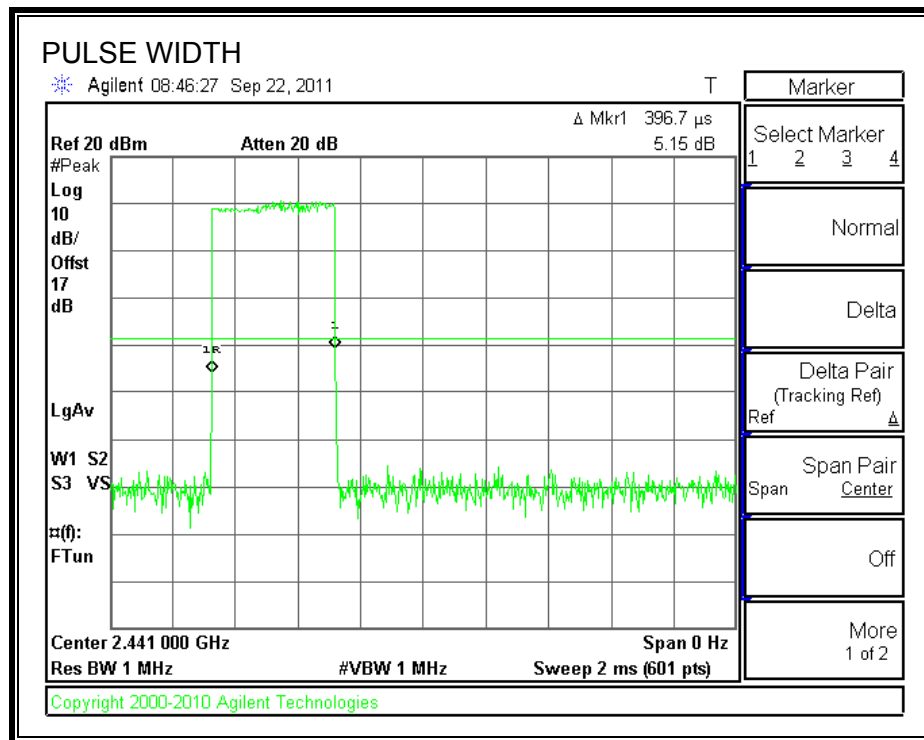


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

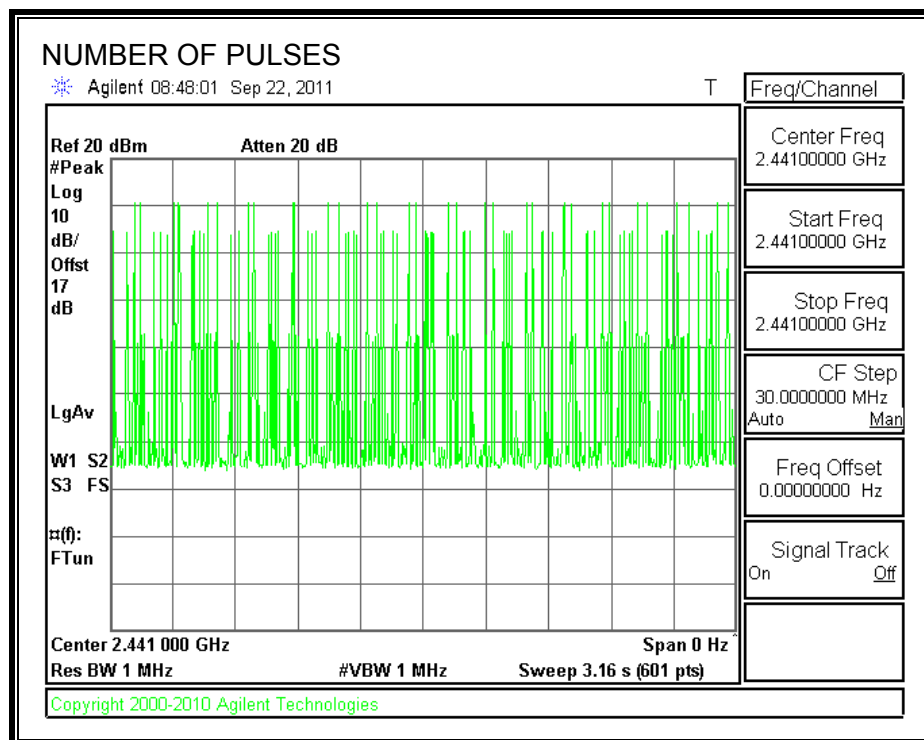


PULSE WIDTH 8PSK DH3

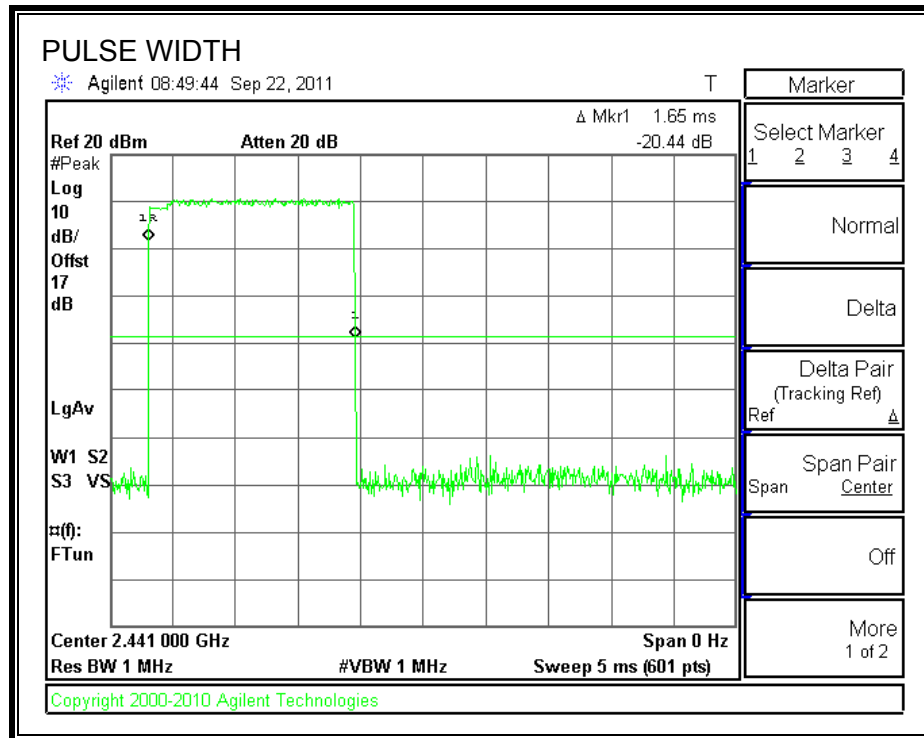


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

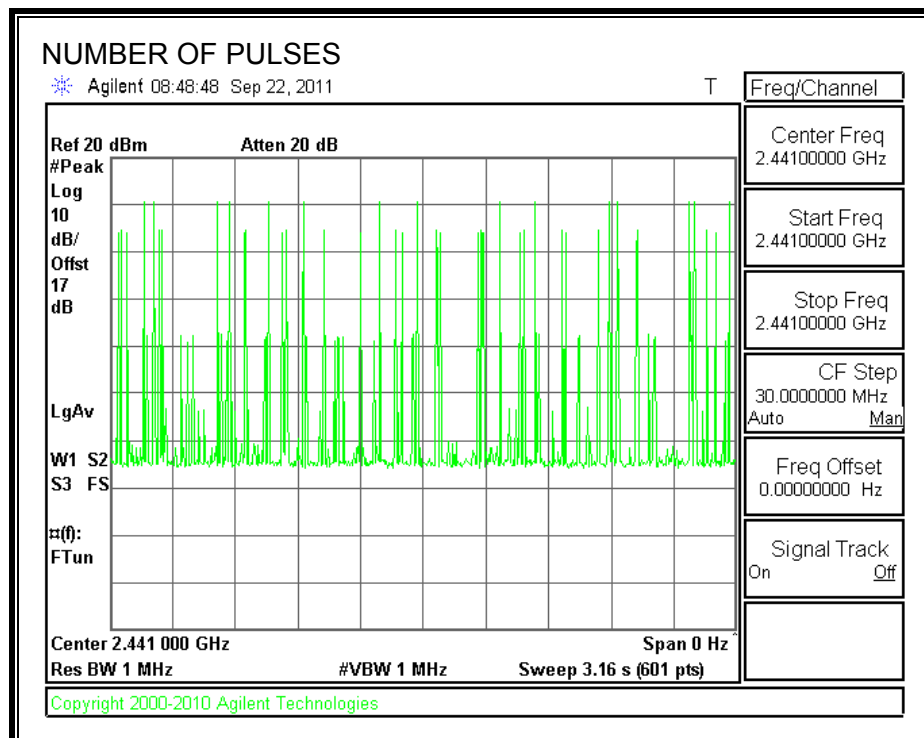

PULSE WIDTH 8PSK DH5

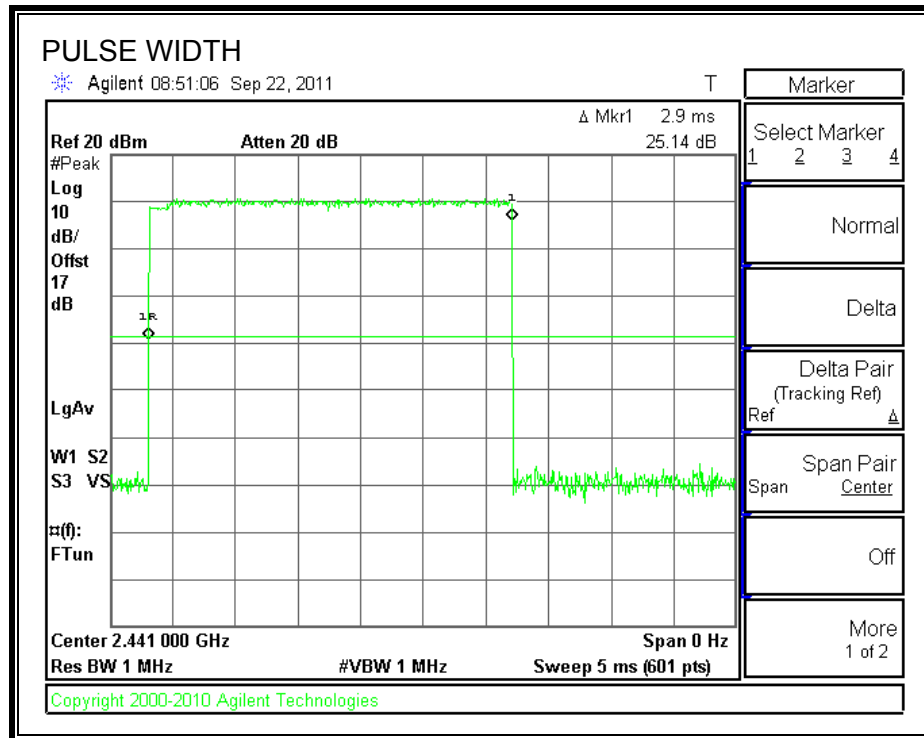

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

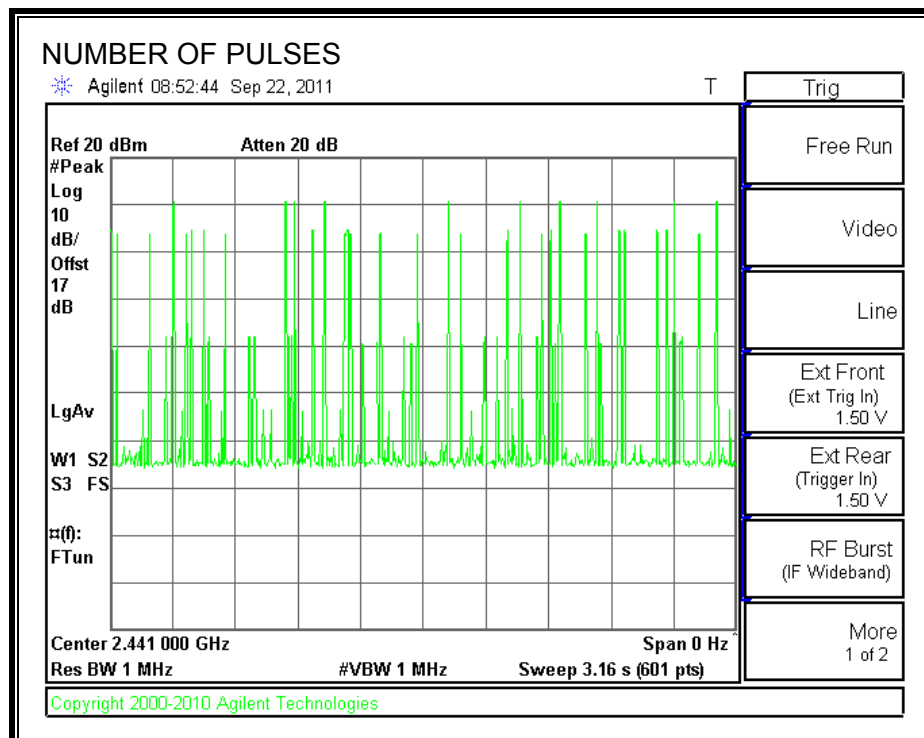

9.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	13.54	21	-7.46
Middle	2441	13.16	21	-7.84
High	2480	12.11	21	-8.89

OUTPUT POWER

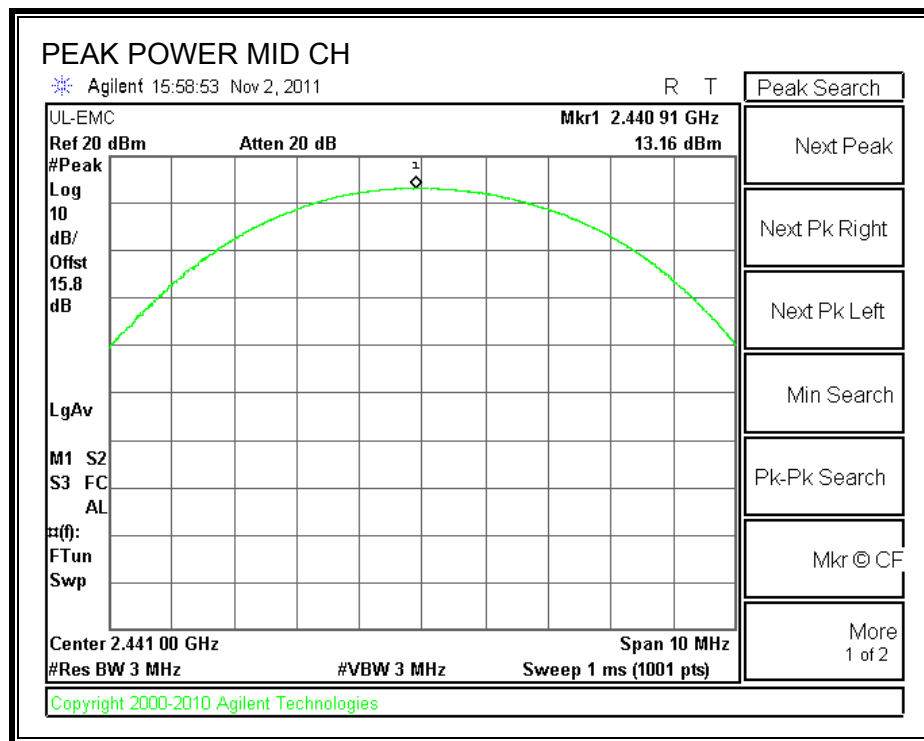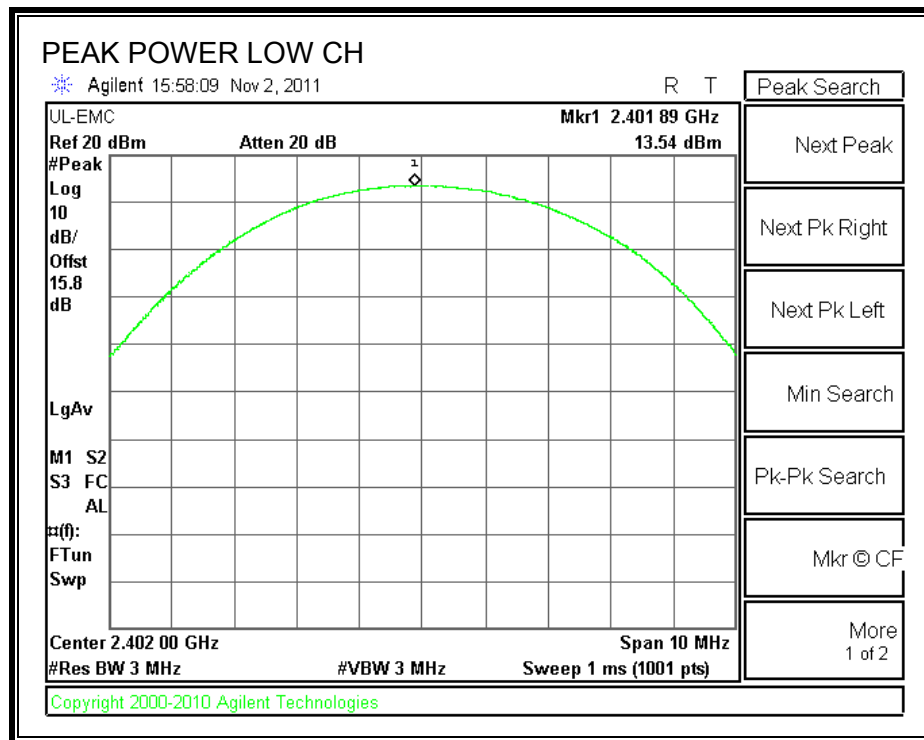

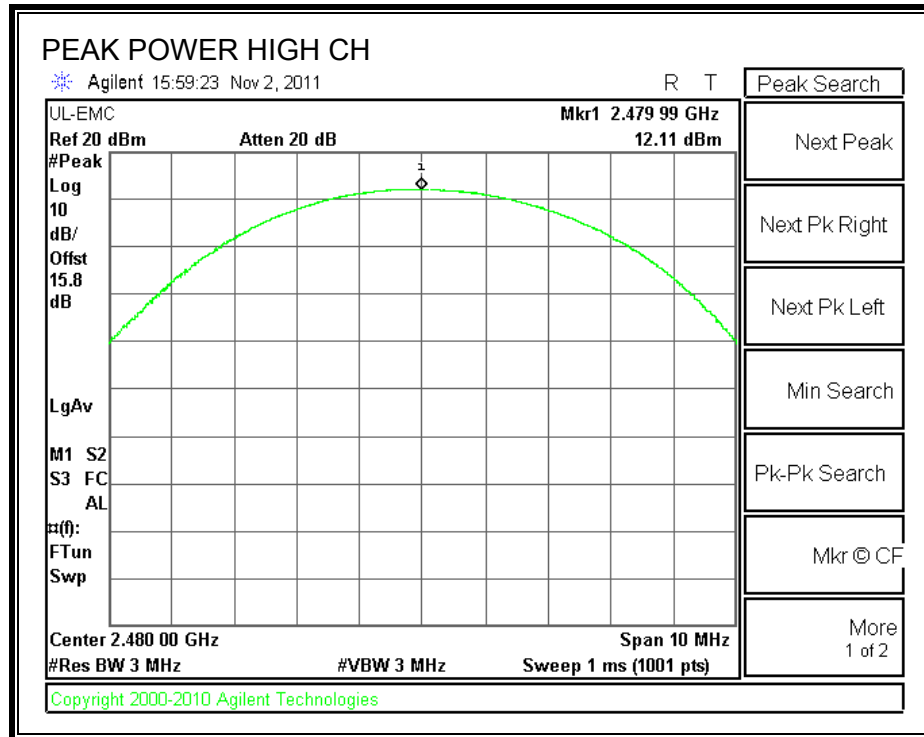

9.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.8 dB (including 10 dB pad and 0.8 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	9.90
Middle	2441	10.00
High	2480	9.30

9.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

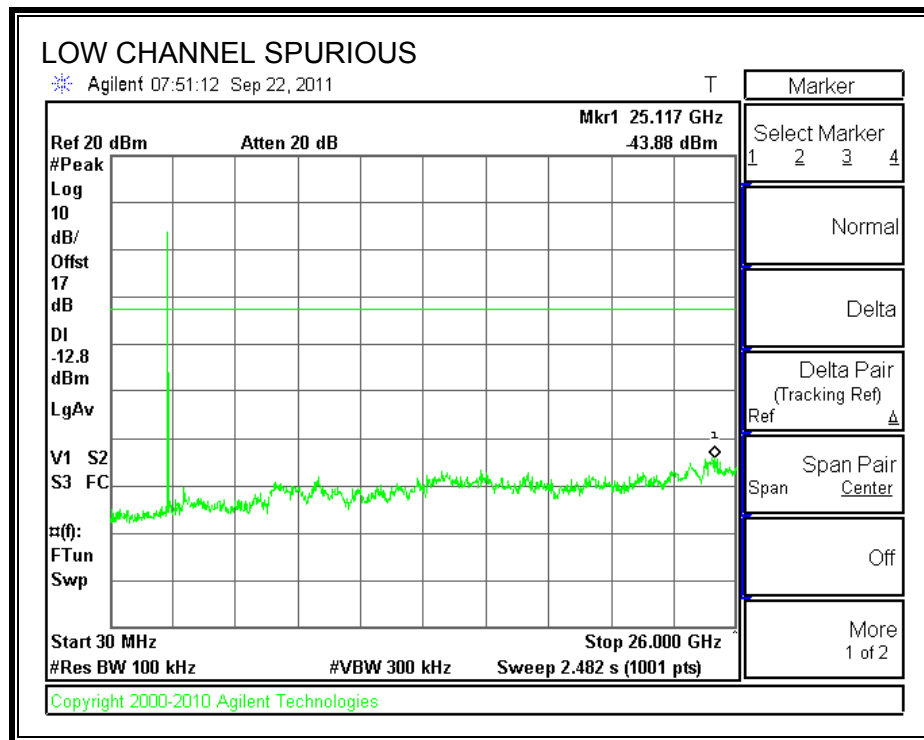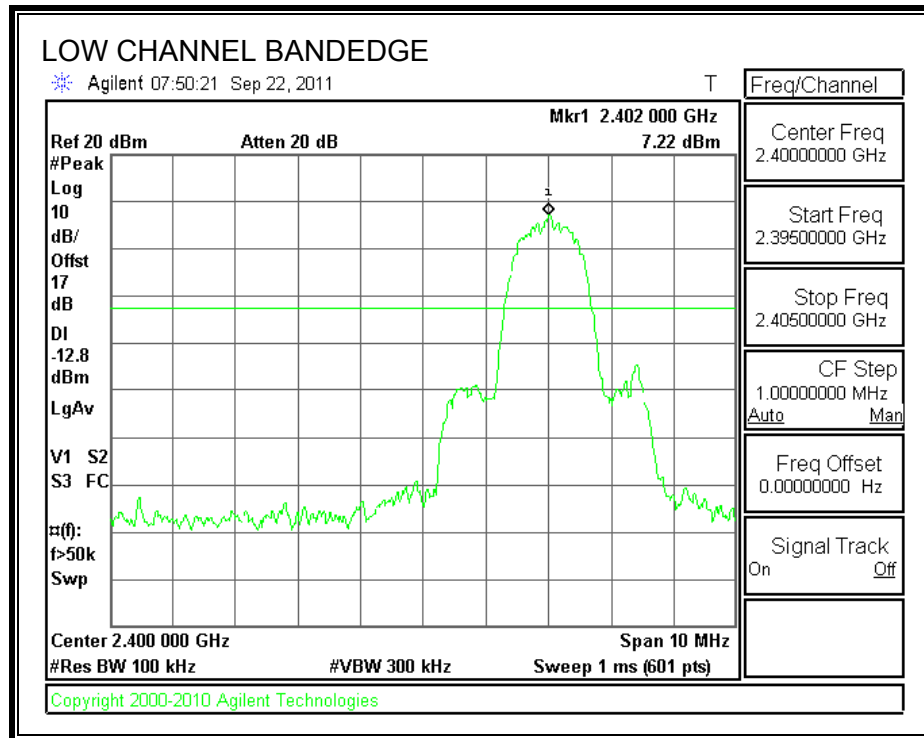



SPURIOUS EMISSIONS, MID CHANNEL

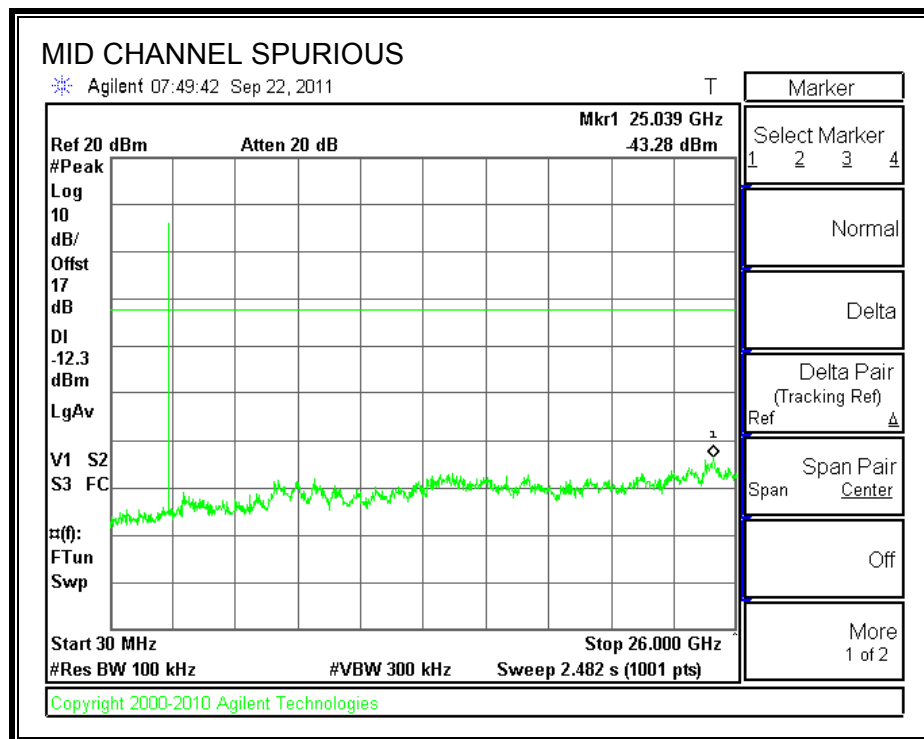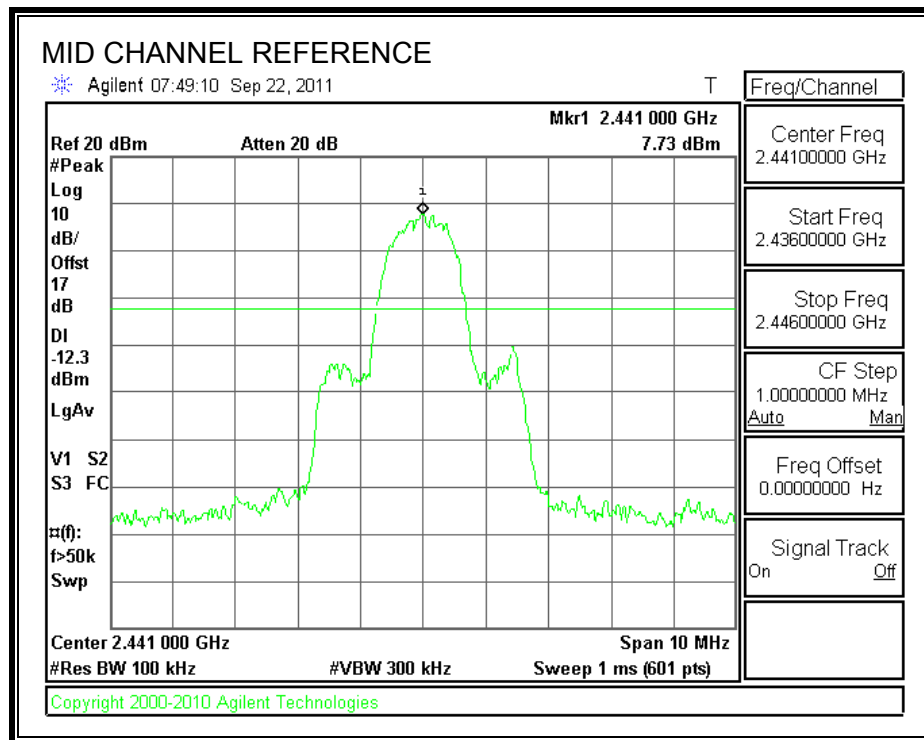

SPURIOUS EMISSIONS, HIGH CHANNEL

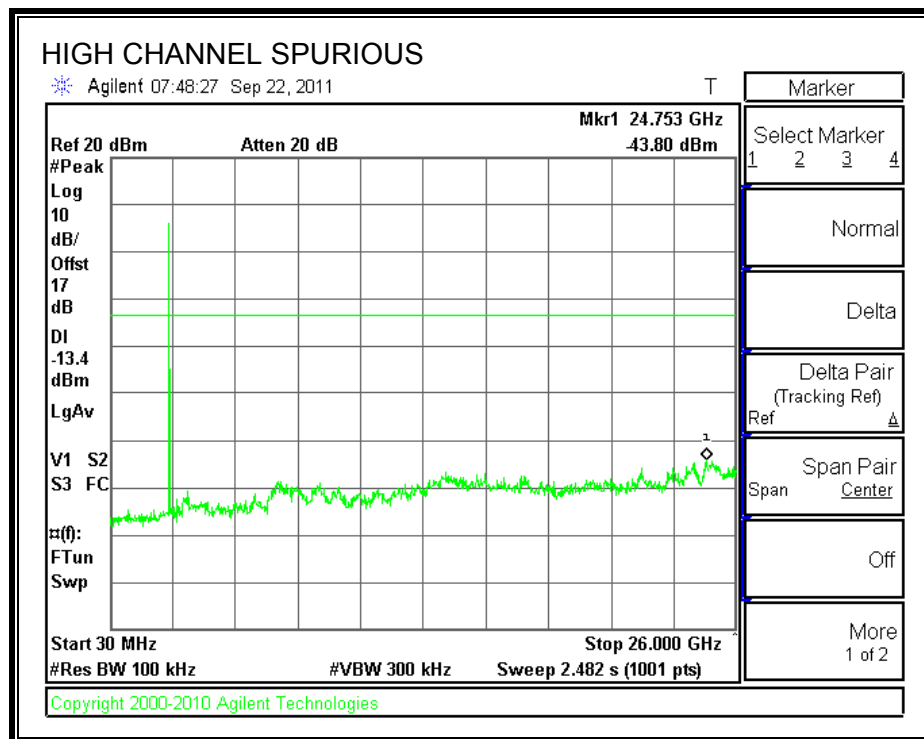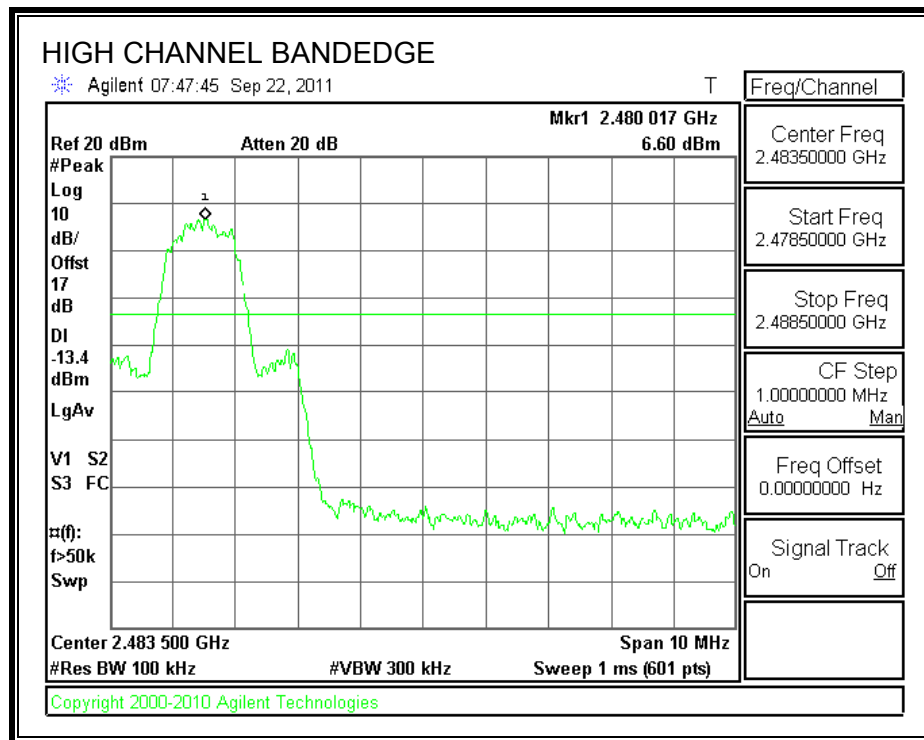

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

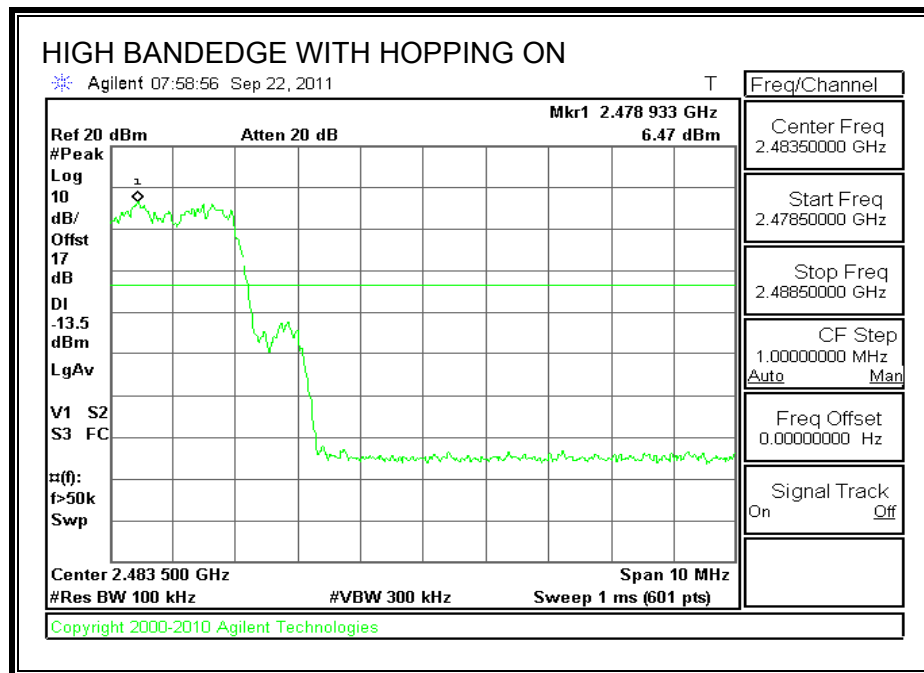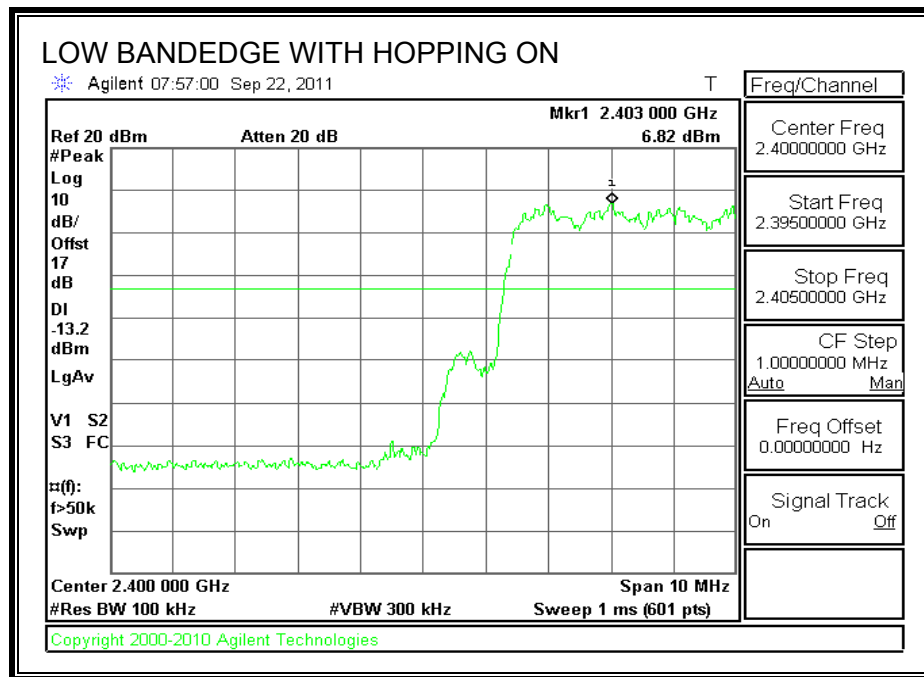

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. BASIC DATA RATE GFSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

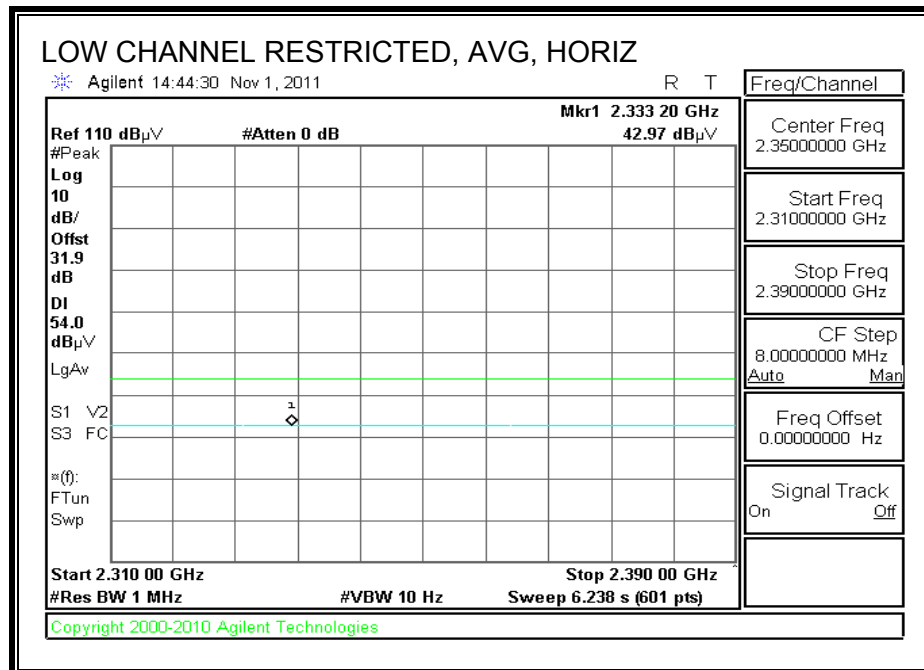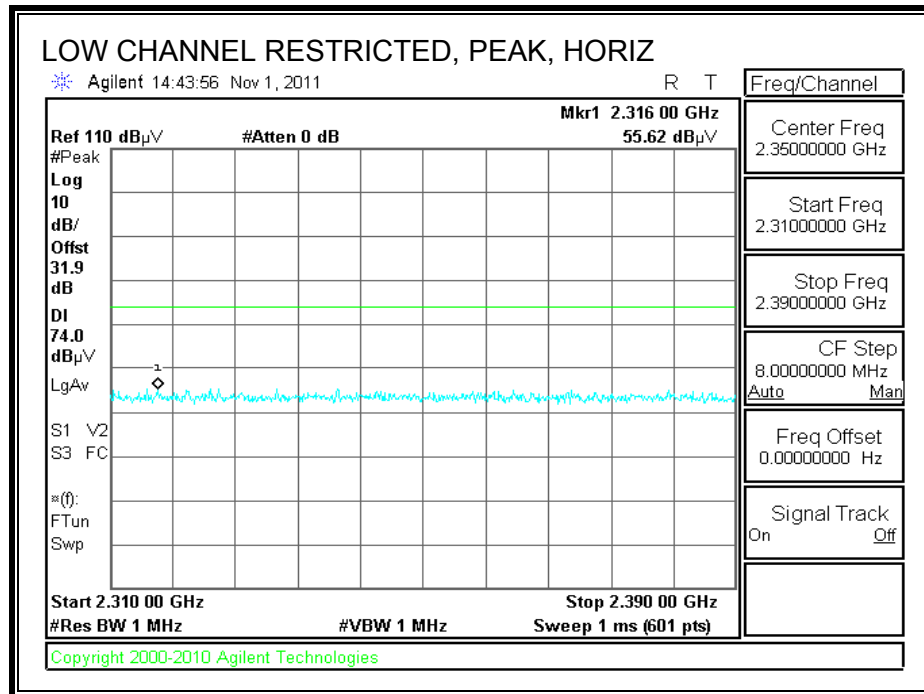



RESTRICTED BANEDGE (LOW CHANNEL, VERTICAL)

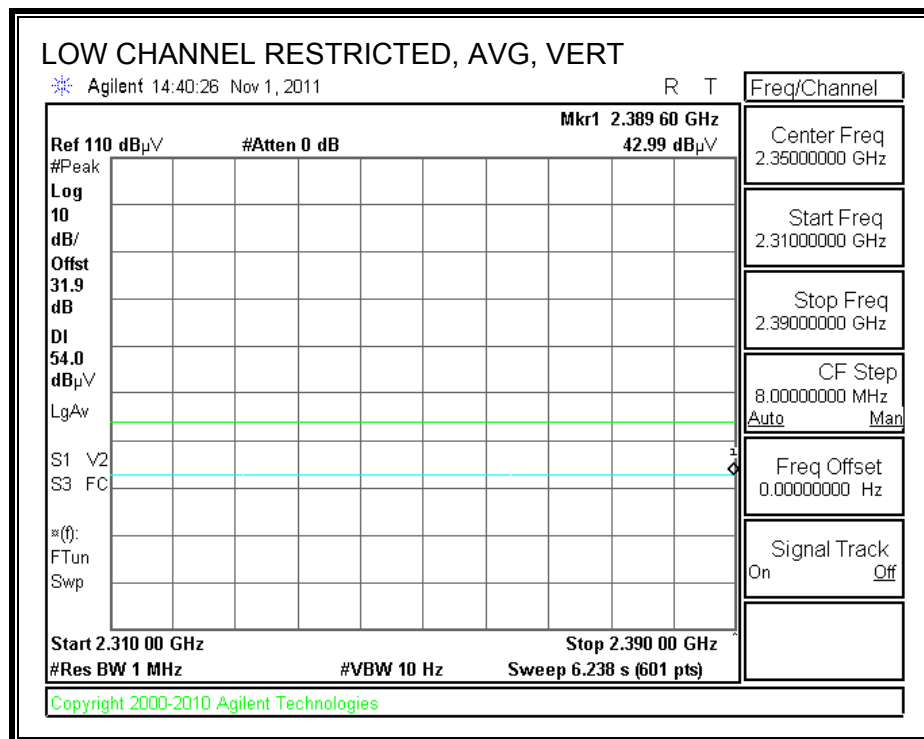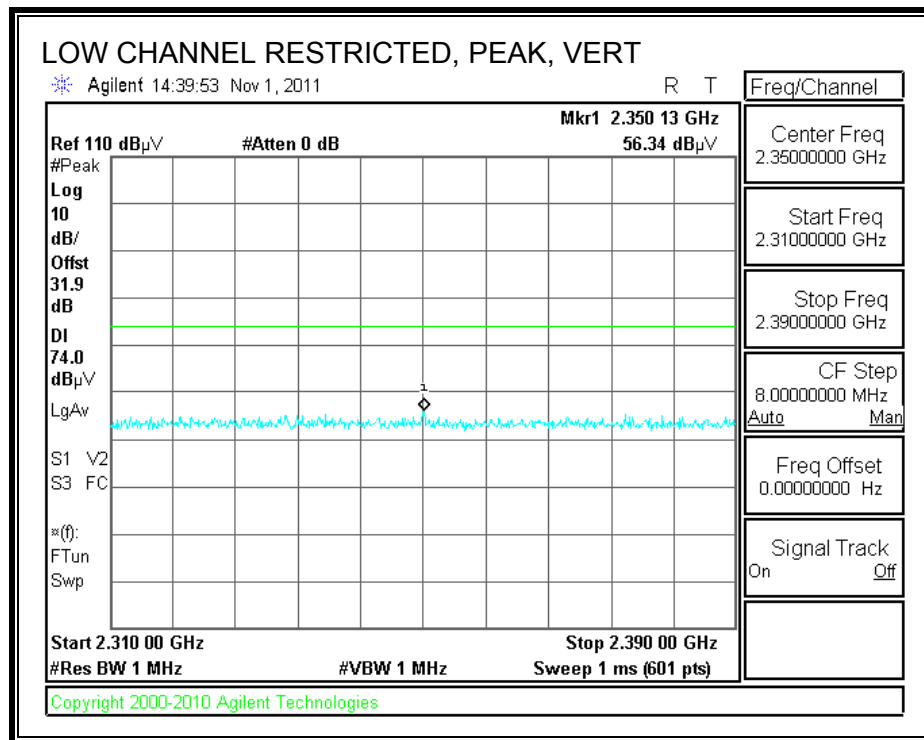

RESTRICTED BANEDGE (HIGH CHANNEL, HORIZONTAL)

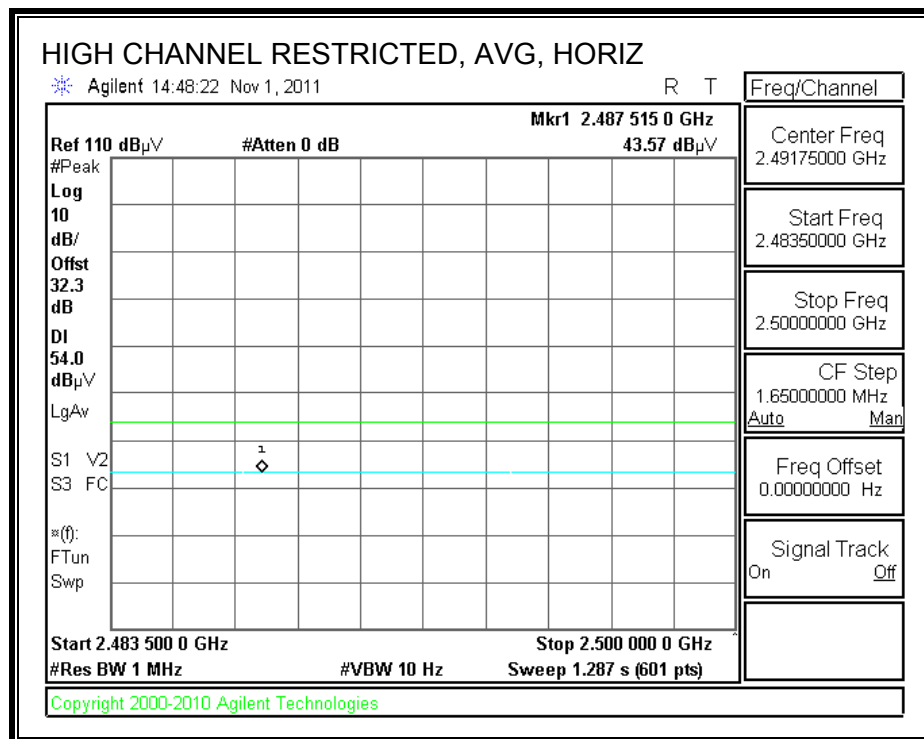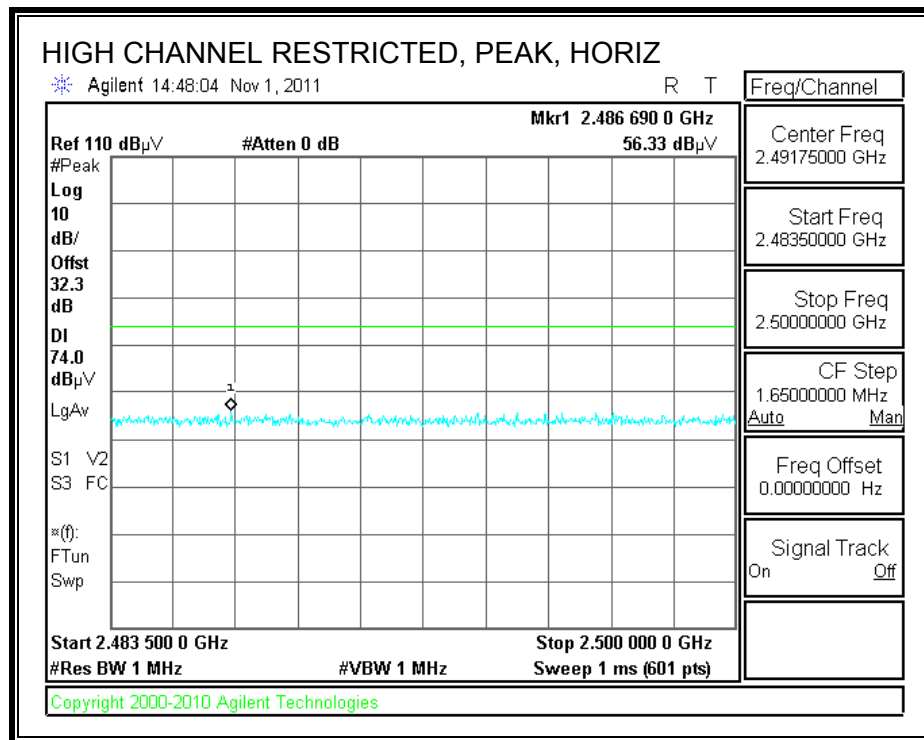

RESTRICTED BANEDGE (HIGH CHANNEL, VERTICAL)

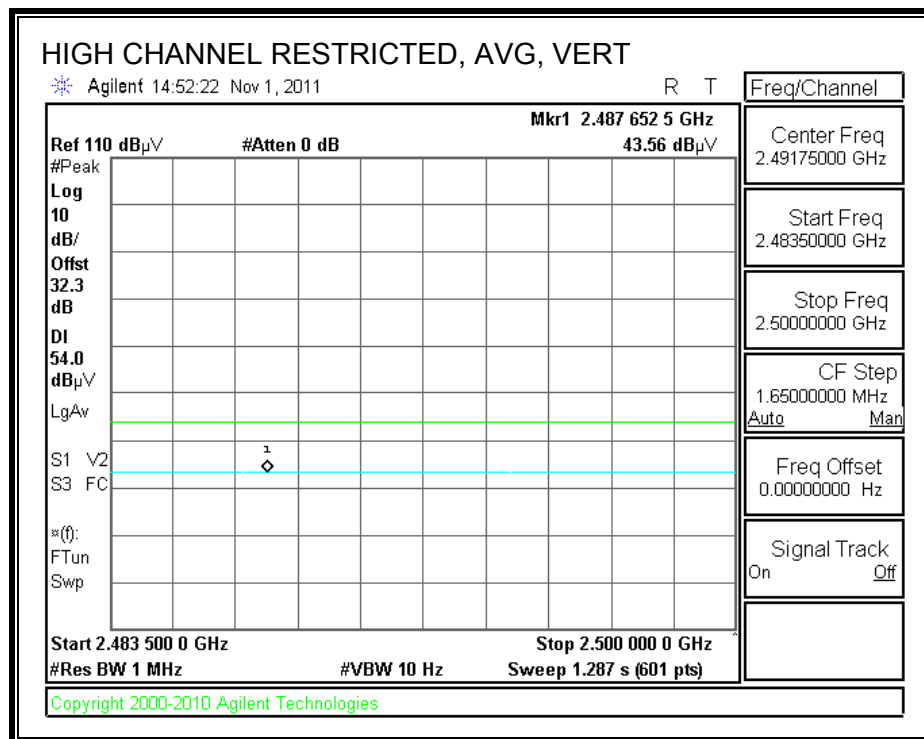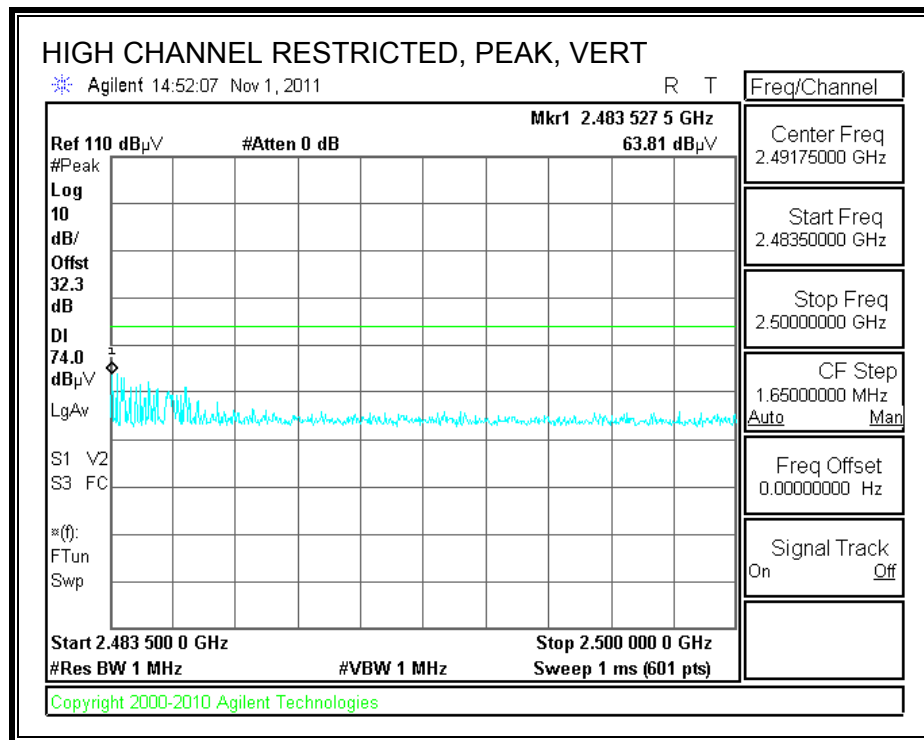

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Chin Pang
Date: 11/01/11
Project #: 11U13938
Company: Apple
Test Target: FCC 15.247
Mode Oper: TX, GFSK

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
CL Cable Loss HPF High Pass Filter



f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fitr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det. P/A/QP	Notes
Low Ch, 2402MHz													
4.804	3.0	38.7	33.1	5.8	-34.8	0.0	0.0	42.8	74.0	-31.2	V	P	
4.804	3.0	25.4	33.1	5.8	-34.8	0.0	0.0	29.5	54.0	-24.5	V	A	
4.804	3.0	37.9	33.1	5.8	-34.8	0.0	0.0	42.0	74.0	-32.0	H	P	
4.804	3.0	25.4	33.1	5.8	-34.8	0.0	0.0	29.5	54.0	-24.5	H	A	
Mid Ch, 2441MHz													
4.882	3.0	37.2	33.2	5.8	-34.9	0.0	0.0	41.5	74.0	-32.5	V	P	
4.882	3.0	25.0	33.2	5.8	-34.9	0.0	0.0	29.2	54.0	-24.8	V	A	
7.323	3.0	36.4	36.2	7.3	-34.7	0.0	0.0	45.2	74.0	-28.8	V	P	
7.323	3.0	24.0	36.2	7.3	-34.7	0.0	0.0	32.8	54.0	-21.2	V	A	
4.882	3.0	38.4	33.2	5.8	-34.9	0.0	0.0	42.7	74.0	-31.3	H	P	
4.882	3.0	26.1	33.2	5.8	-34.9	0.0	0.0	30.3	54.0	-23.7	H	A	
7.323	3.0	36.0	36.2	7.3	-34.7	0.0	0.0	44.8	74.0	-29.2	H	P	
7.323	3.0	24.2	36.2	7.3	-34.7	0.0	0.0	33.0	54.0	-21.0	H	A	
High Ch, 2480MHz													
4.960	3.0	38.0	33.3	5.9	-34.9	0.0	0.0	42.4	74.0	-31.6	V	P	
4.960	3.0	25.1	33.3	5.9	-34.9	0.0	0.0	29.4	54.0	-24.6	V	A	
7.440	3.0	37.4	36.4	7.3	-34.6	0.0	0.0	46.4	74.0	-27.6	V	P	
7.440	3.0	24.1	36.4	7.3	-34.6	0.0	0.0	33.1	54.0	-20.9	V	A	
4.960	3.0	37.8	33.3	5.9	-34.9	0.0	0.0	42.2	74.0	-31.8	H	P	
4.960	3.0	25.6	33.3	5.9	-34.9	0.0	0.0	30.0	54.0	-24.0	H	A	
7.440	3.0	37.7	36.4	7.3	-34.6	0.0	0.0	46.7	74.0	-27.3	H	P	
7.440	3.0	24.2	36.4	7.3	-34.6	0.0	0.0	33.2	54.0	-20.8	H	A	

Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

10.2.2. ENHANCED DATA RATE 8PSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

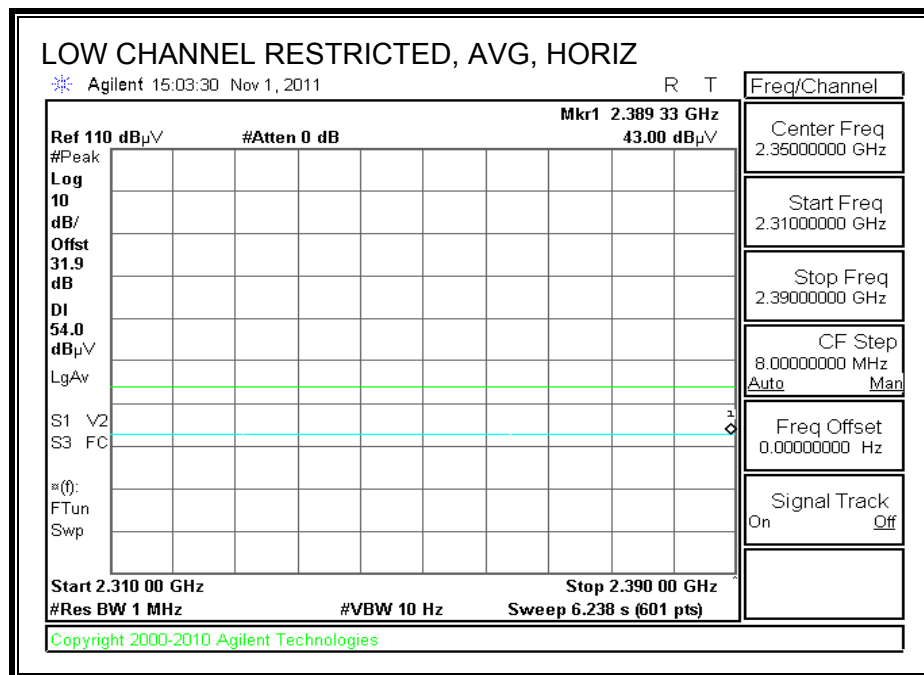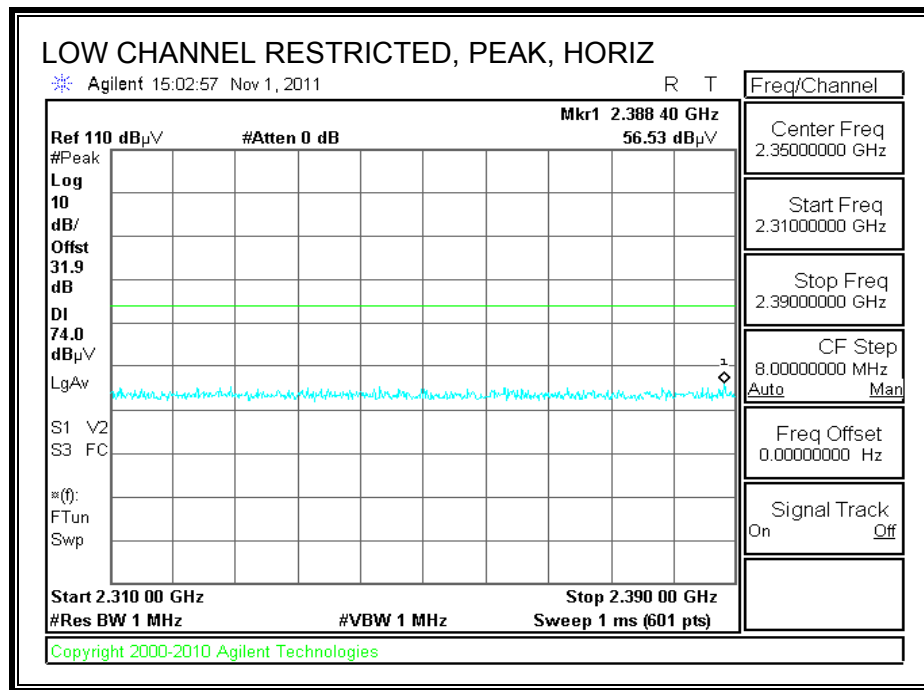



RESTRICTED BANEDGE (LOW CHANNEL, VERTICAL)

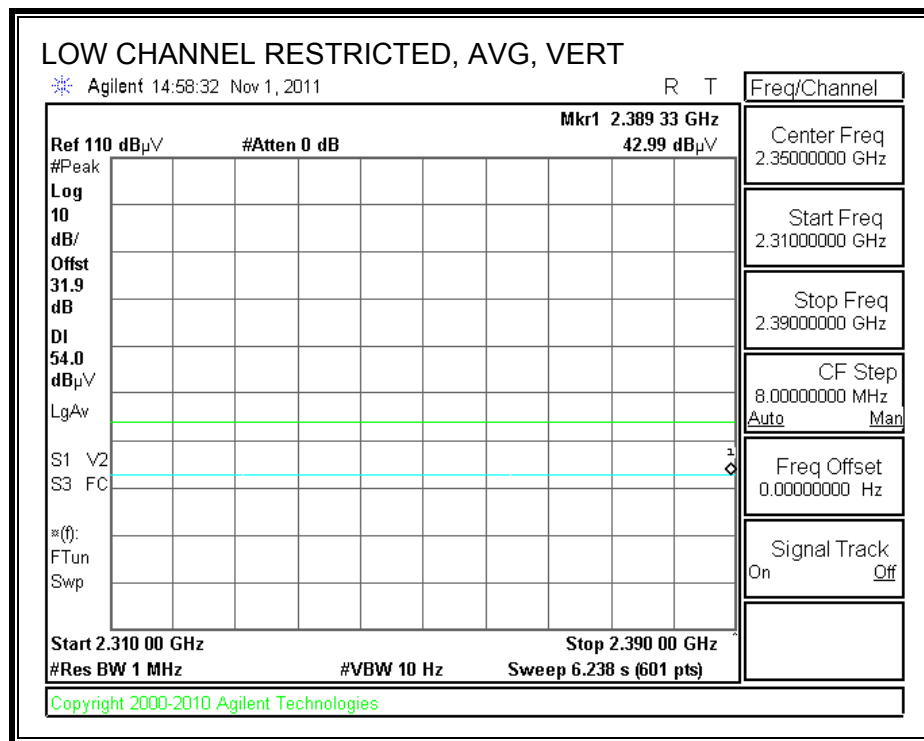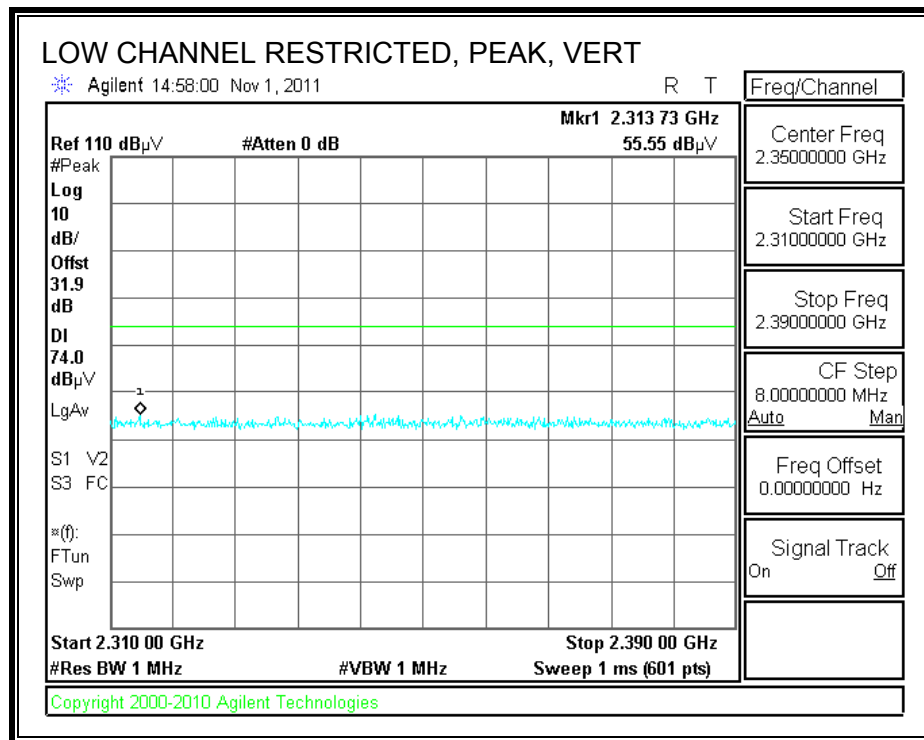

RESTRICTED BANEDGE (HIGH CHANNEL, HORIZONTAL)

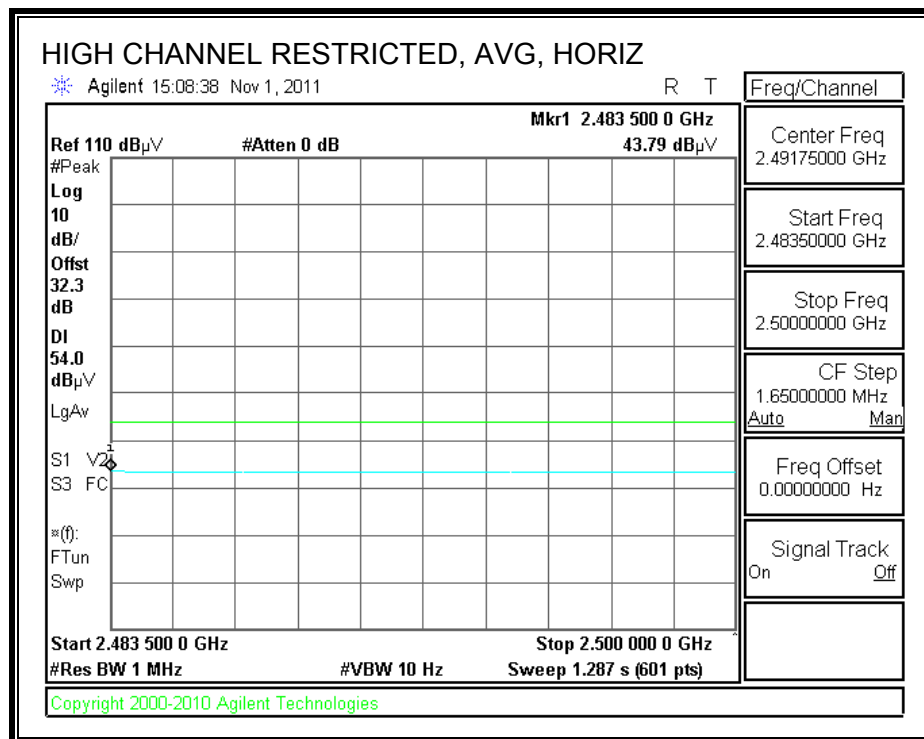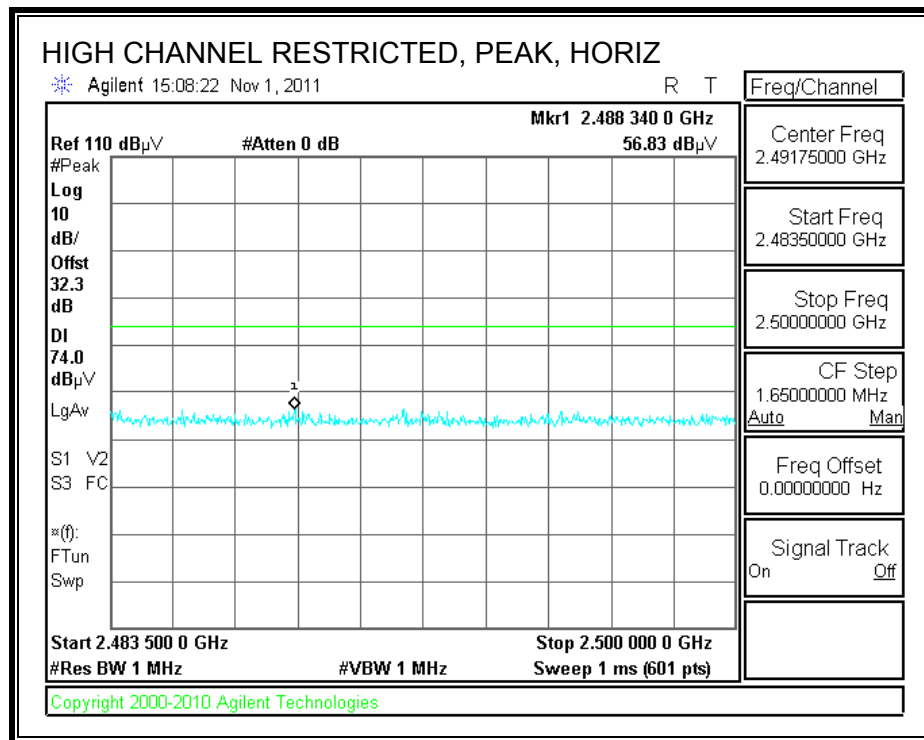

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

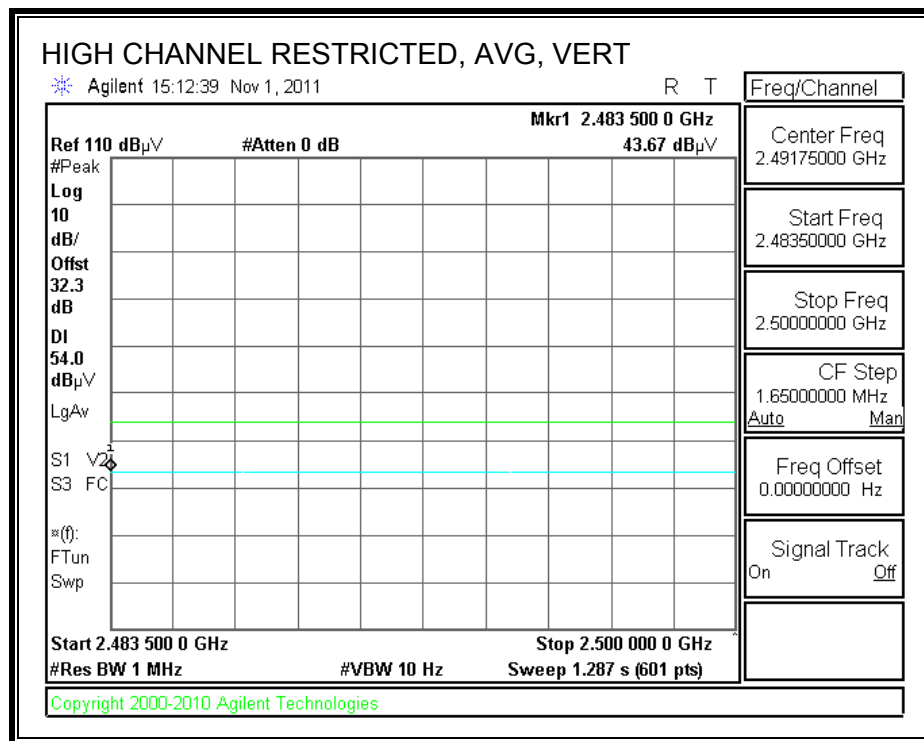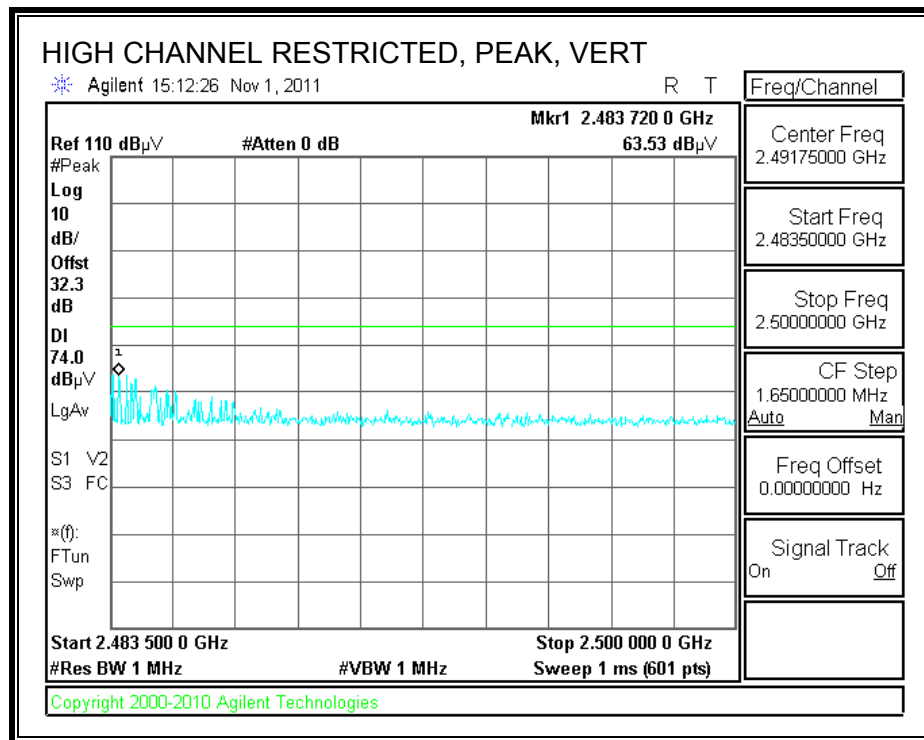

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Chin Pang
Date: 11/01/11
Project #: 11U13938
Company: Apple
Test Target: FCC 15.247
Mode Oper: TX, 8PSK

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
CL Cable Loss HPF High Pass Filter

f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fitr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
Low Ch, 2402MHz													
4.804	3.0	38.4	33.1	5.8	-34.8	0.0	0.0	42.4	74.0	-31.6	H	P	
4.804	3.0	25.2	33.1	5.8	-34.8	0.0	0.0	29.3	54.0	-24.7	H	A	
4.804	3.0	38.6	33.1	5.8	-34.8	0.0	0.0	42.7	74.0	-31.3	V	P	
4.804	3.0	25.2	33.1	5.8	-34.8	0.0	0.0	29.2	54.0	-24.8	V	A	
Mid Ch, 2441MHz													
4.882	3.0	38.0	33.2	5.8	-34.9	0.0	0.0	42.2	74.0	-31.8	H	P	
4.882	3.0	25.0	33.2	5.8	-34.9	0.0	0.0	29.3	54.0	-24.7	H	A	
7.323	3.0	36.7	36.2	7.3	-34.7	0.0	0.0	45.5	74.0	-28.5	H	P	
7.323	3.0	24.1	36.2	7.3	-34.7	0.0	0.0	32.9	54.0	-21.1	H	A	
4.882	3.0	37.4	33.2	5.8	-34.9	0.0	0.0	41.6	74.0	-32.4	V	P	
4.882	3.0	24.8	33.2	5.8	-34.9	0.0	0.0	29.1	54.0	-24.9	V	A	
7.323	3.0	36.1	36.2	7.3	-34.7	0.0	0.0	45.0	74.0	-29.0	V	P	
7.323	3.0	24.1	36.2	7.3	-34.7	0.0	0.0	32.9	54.0	-21.1	V	A	
High Ch, 2480MHz													
4.960	3.0	37.7	33.3	5.9	-34.9	0.0	0.0	42.1	74.0	-31.9	H	P	
4.960	3.0	25.5	33.3	5.9	-34.9	0.0	0.0	29.9	54.0	-24.1	H	A	
7.440	3.0	37.7	36.4	7.3	-34.6	0.0	0.0	46.7	74.0	-27.3	H	P	
7.440	3.0	24.0	36.4	7.3	-34.6	0.0	0.0	33.0	54.0	-21.0	H	A	
4.960	3.0	37.2	33.3	5.9	-34.9	0.0	0.0	41.5	74.0	-32.5	V	P	
4.960	3.0	24.9	33.3	5.9	-34.9	0.0	0.0	29.3	54.0	-24.7	V	A	
7.440	3.0	36.8	36.4	7.3	-34.6	0.0	0.0	45.8	74.0	-28.2	V	P	
7.440	3.0	24.0	36.4	7.3	-34.6	0.0	0.0	33.0	54.0	-21.0	V	A	

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.


10.3. RECEIVER ABOVE 1 GHz

High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber-B															
Company:		Apple													
Project #:		11U13938													
Date:		11/2/2011													
Test Engineer:		Chin Pang													
Configuration:		EUT with AC Adapter and Earphone													
Mode:		RX, (Worst Case)													
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T59; S/N: 3245 @3m		T145 Agilent 3008A0056						FCC 15.209							
Hi Frequency Cables															
3' cable 22807700		12' cable 22807600		20' cable 22807500		HPF		Reject Filter		<u>Peak Measurements</u> RBW=VBW=1MHz <u>Average Measurements</u> RBW=1MHz ; VBW=10Hz					
3' cable 22807700		12' cable 22807600		20' cable 22807500											
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
1.200	3.0	48.5	30.6	24.7	2.9	-35.8	0.0	0.0	40.2	22.3	74	54	-33.8	-31.7	H
1.593	3.0	49.6	31.5	26.5	3.3	-35.6	0.0	0.0	43.8	25.7	74	54	-30.2	-28.3	H
1.120	3.0	51.0	32.8	24.4	2.8	-35.9	0.0	0.0	42.2	24.0	74	54	-31.8	-30.0	V
1.200	3.0	48.6	31.7	24.7	2.9	-35.8	0.0	0.0	40.3	23.4	74	54	-33.7	-30.6	V
Rev. 07.08.11															
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								


10.4. WORST-CASE BELOW 1 GHz

BLUETOOTH

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

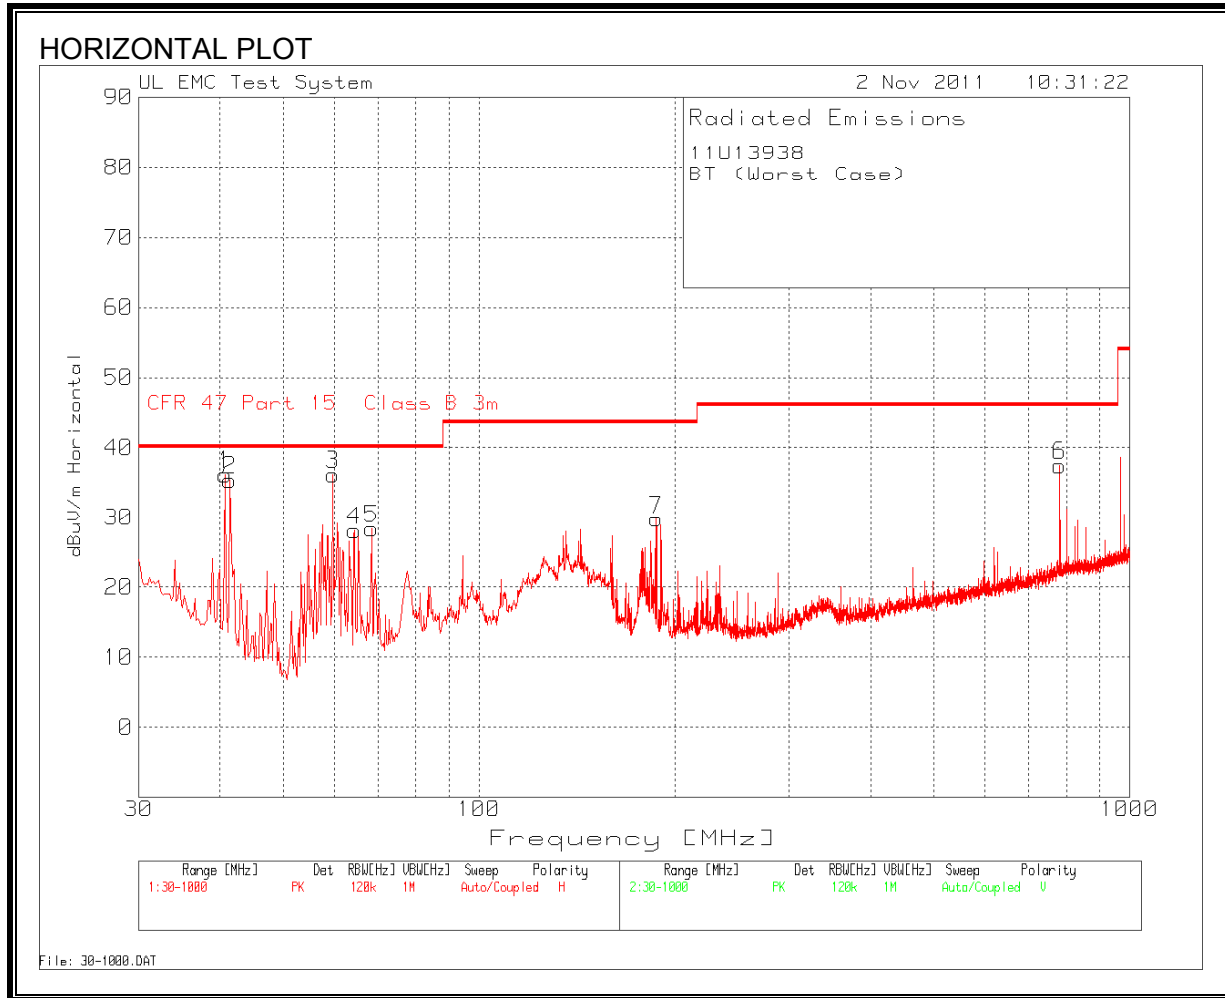

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

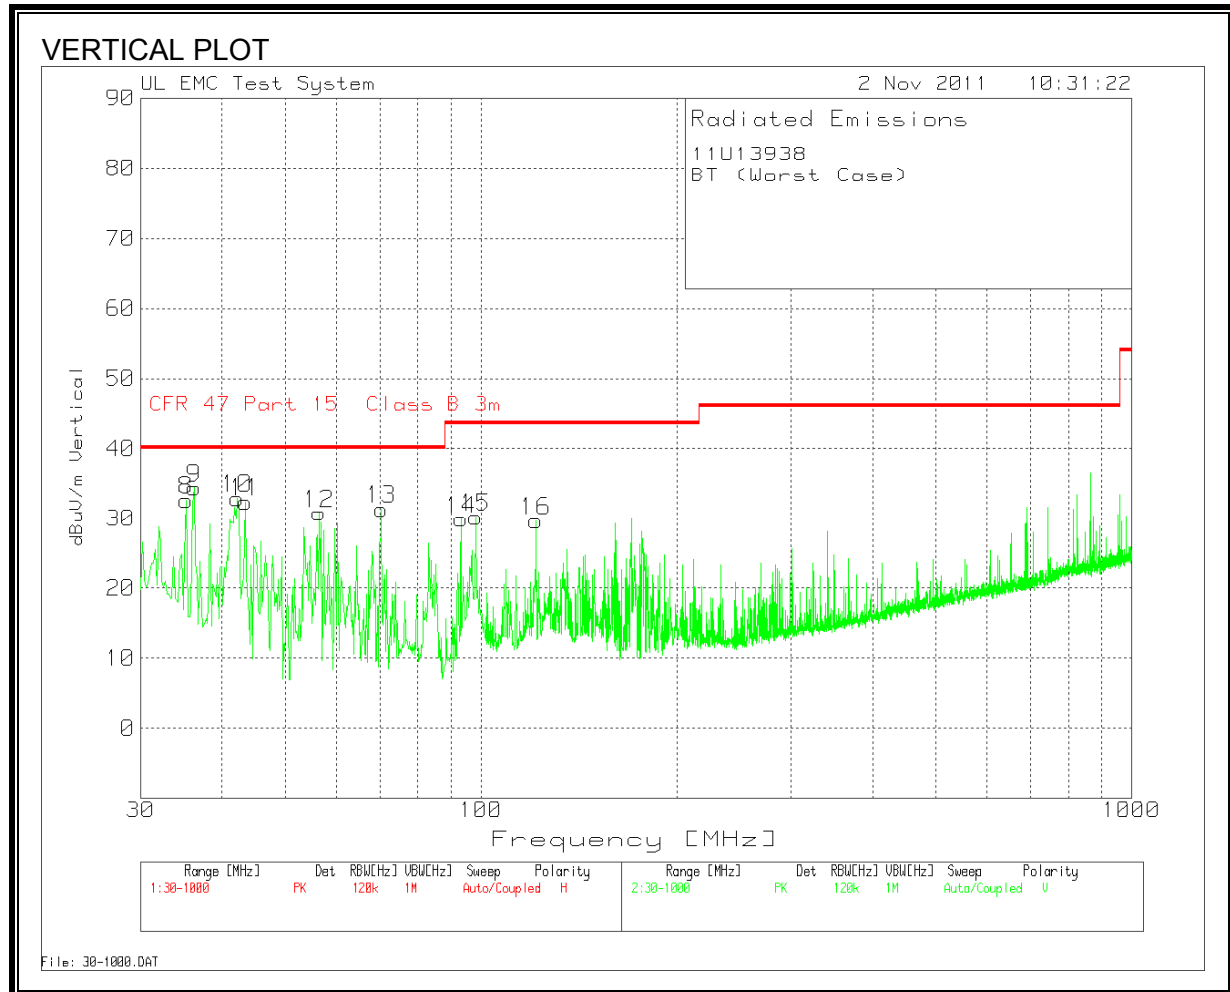

HORIZONTAL AND VERTICAL DATA

11U13938									
BT (Worst Case)									
Range 1 30 - 1000MHz									
Frequency	Reading	Detector	Cable.Loss	PreAmp G	Ant Factor	dBuV/m	Class B lir	Margin	Polarity
40.6615	50.93	PK	0.9	-29.4	13.7	36.13	40	-3.87	Horz
41.4369	50.65	PK	0.9	-29.4	13.2	35.35	40	-4.65	Horz
59.6583	56.46	PK	1.2	-29.4	7.9	36.16	40	-3.84	Horz
64.3106	48.3	PK	1.2	-29.4	8	28.1	40	-11.9	Horz
68.3813	48.34	PK	1.2	-29.4	8.2	28.34	40	-11.66	Horz
781.7306	41.88	PK	3.9	-29	20.7	37.48	46	-8.52	Horz
187.4021	45.73	PK	1.9	-29	11.1	29.73	43.5	-13.77	Horz
Range 2 30 - 1000MHz									
Frequency	Reading	Detector	Cable.Loss	PreAmp G	Ant Factor	dBuV/m	Class B lir	Margin	Polarity
35.2338	43.36	PK	0.9	-29.5	17.9	32.66	40	-7.34	Vert
36.203	45.91	PK	0.9	-29.5	17.1	34.41	40	-5.59	Vert
42.2122	48.6	PK	1	-29.4	12.7	32.9	40	-7.1	Vert
43.3753	48.79	PK	1	-29.4	12	32.39	40	-7.61	Vert
56.3629	51.17	PK	1.1	-29.4	7.9	30.77	40	-9.23	Vert
70.3197	51.33	PK	1.2	-29.4	8.2	31.33	40	-8.67	Vert
93.1934	49.47	PK	1.4	-29.3	8.3	29.87	43.5	-13.63	Vert
98.0396	48.48	PK	1.4	-29.3	9.6	30.18	43.5	-13.32	Vert
121.4948	43.6	PK	1.5	-29.2	13.8	29.7	43.5	-13.8	Vert

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

6 WORST EMISSIONS

BLUETOOTH

11U13938							
BT (Worst Case)							
Line-L1 .15 - 30MHz							
Frequency	Reading	Detector	dB[uVolts]	Class B Q	Margin	Class B A	Margin
0.1725	63.62	PK	63.62	64.8	-1.18	54.8	8.82
0.1725	40.78	Av	40.78	-	-	54.8	-14.02
0.258	56.48	PK	56.48	61.5	-5.02	51.5	4.98
0.258	30.23	Av	30.23	-	-	51.5	-21.27
0.3435	49.38	PK	49.38	59.1	-9.72	49.1	0.28
0.3435	24.39	Av	24.39	-	-	49.1	-24.71
Line-L2 .15 - 30MHz							
Frequency	Reading	Detector	dB[uVolts]	Class B Q	Margin	Class B A	Margin
0.1725	61.55	PK	61.55	64.8	-3.25	54.8	6.75
0.1725	38.62	Av	38.62	-	-	54.8	-16.18
0.258	53.68	PK	53.68	61.5	-7.82	51.5	2.18
0.258	27.59	Av	27.59	-	-	51.5	-23.91
0.339	48.69	PK	48.69	59.2	-10.51	49.2	-0.51
0.339	24.69	Av	24.69	-	-	49.2	-24.51

LINE 1 RESULTS

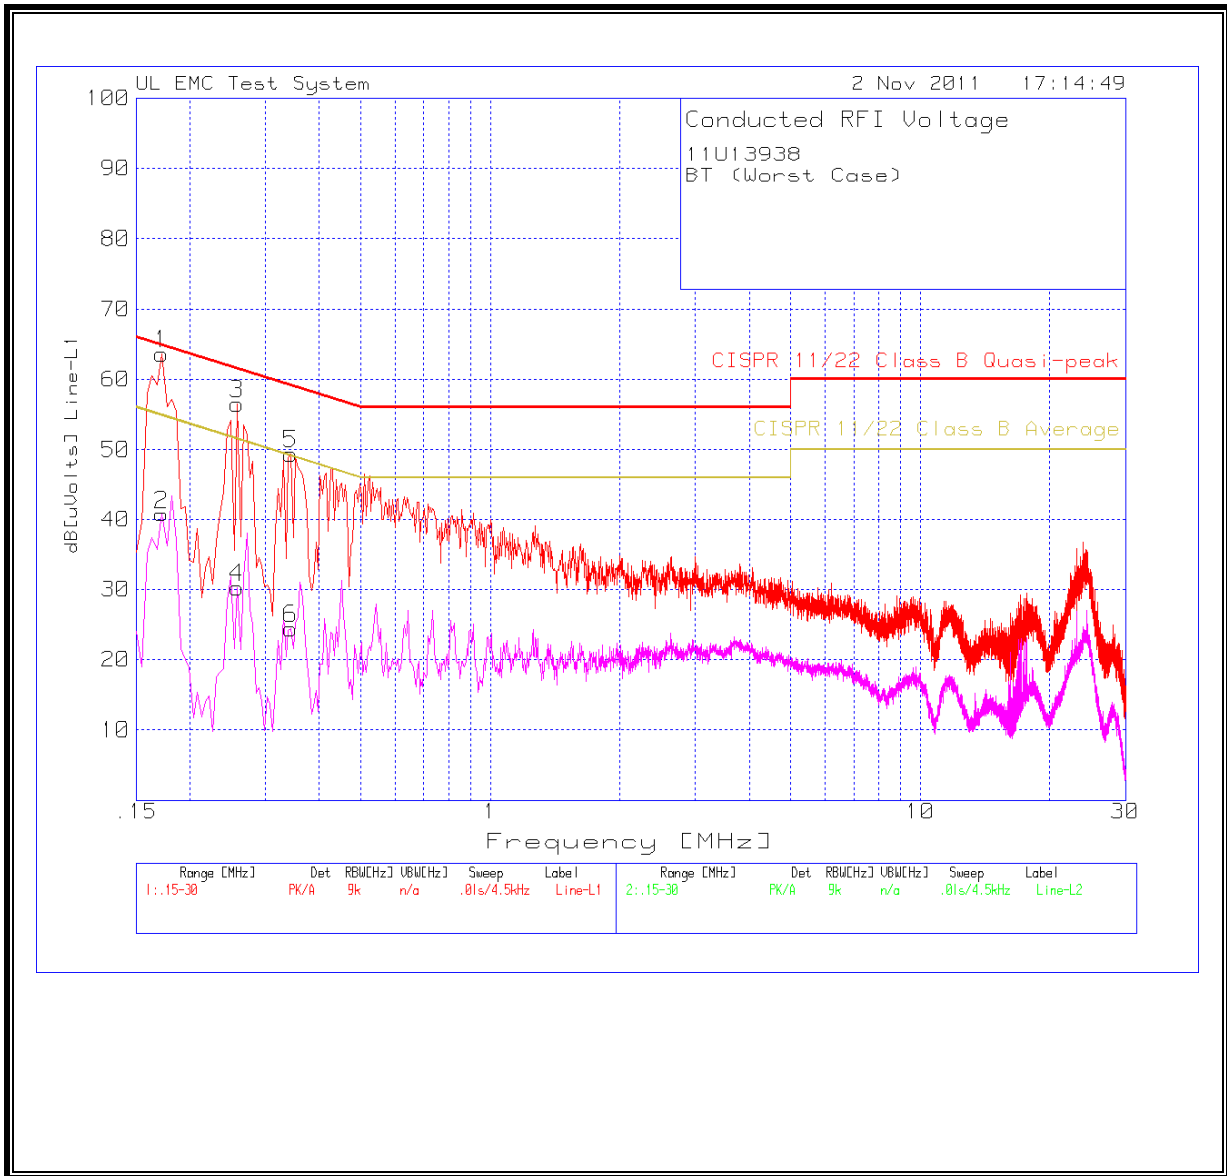

LINE 2 RESULTS

