

GSM1900

Frequency: 1850.2 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.481$ mho/m; $\epsilon_r = 51.696$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/GPRS 2 slots Ch 512 w/ Pwr back-off (0 mm)/Area Scan (9x7x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.793 mW/g

Rear/GPRS 2 slots Ch 512 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 23.388 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 2.2600

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.506 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.429 mW/g

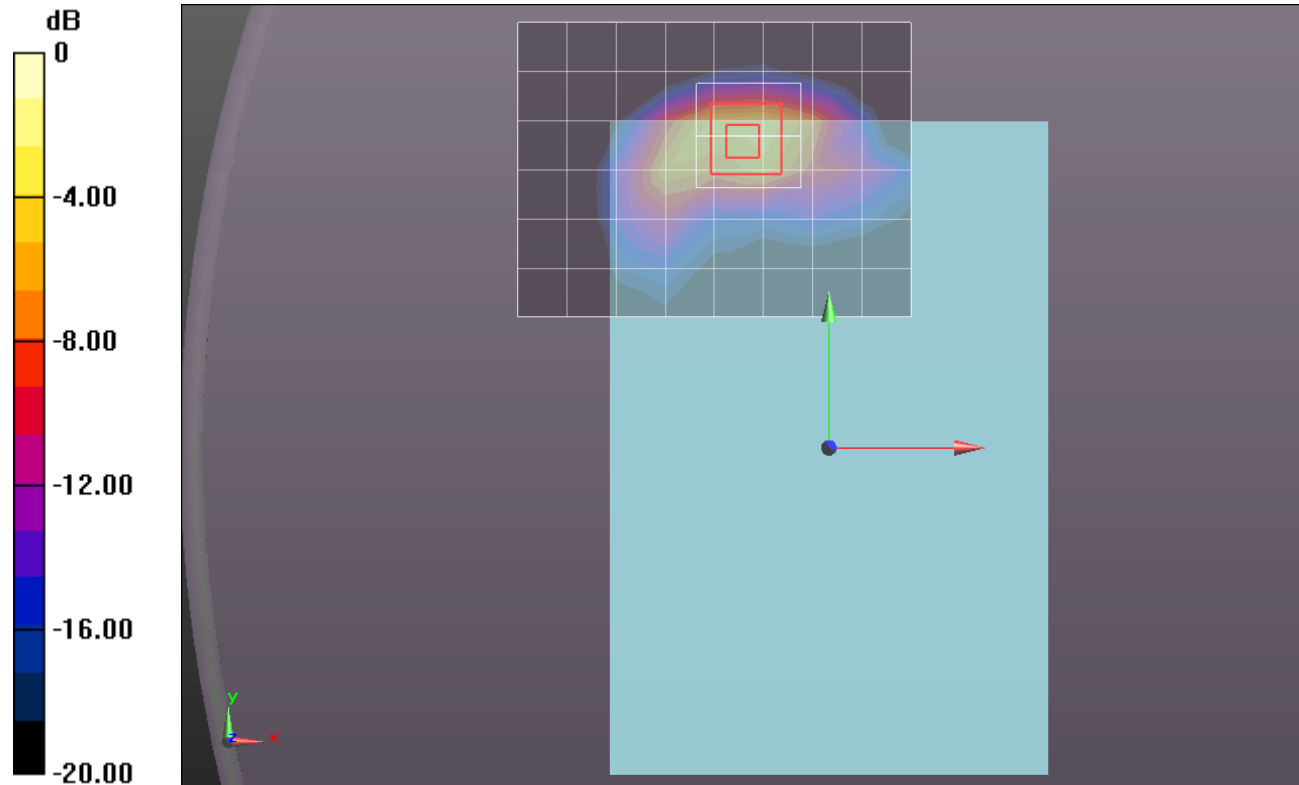

0 dB = 1.430mW/g = 3.11 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.516 \text{ mho/m}$; $\epsilon_r = 51.603$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/GPRS 2 slots Ch 661 w/ Pwr back-off (0 mm)/Area Scan (9x7x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.829 mW/g

Rear/GPRS 2 slots Ch 661 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.501 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.3400

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.522 mW/g

Maximum value of SAR (measured) = 1.484 mW/g

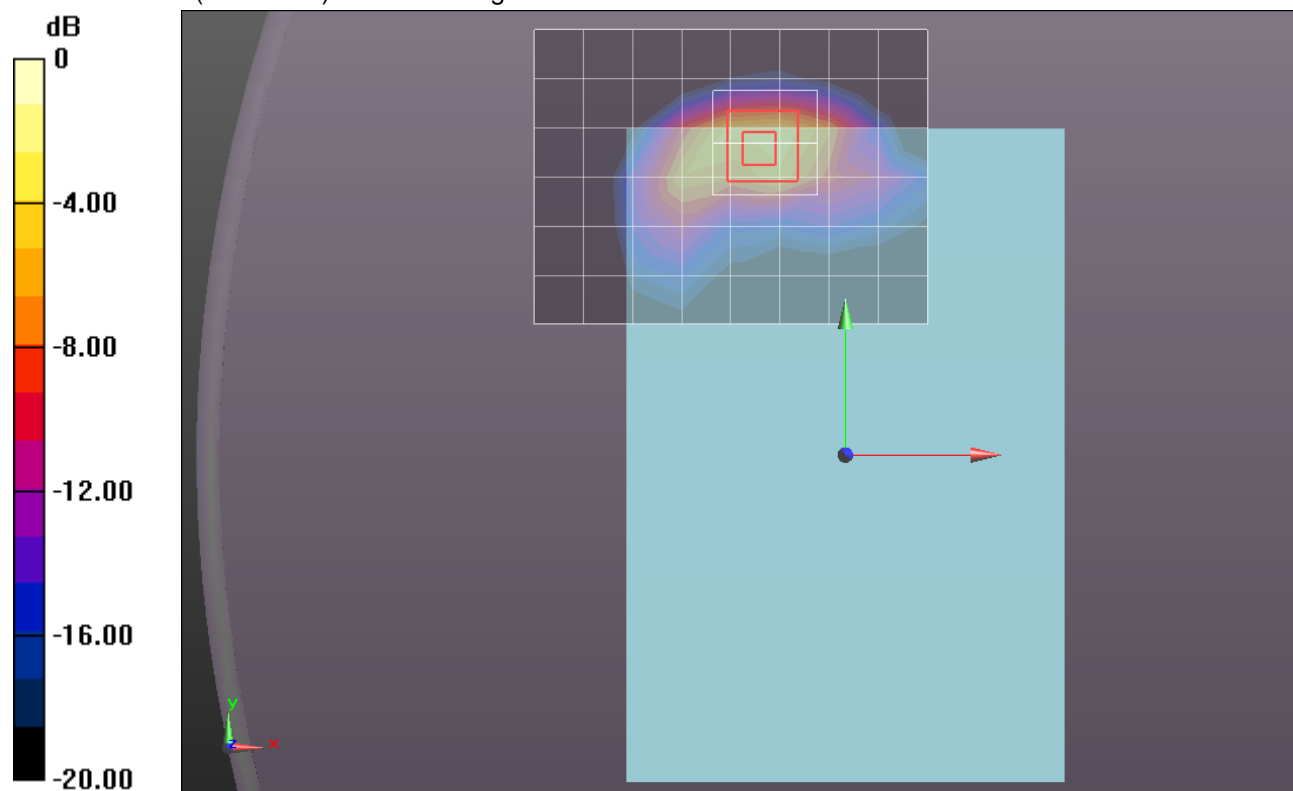


0 dB = 1.480mW/g = 3.41 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Rear/GPRS 2 slots Ch 661 w/ Pwr back-off (0 mm)/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.819 mW/g

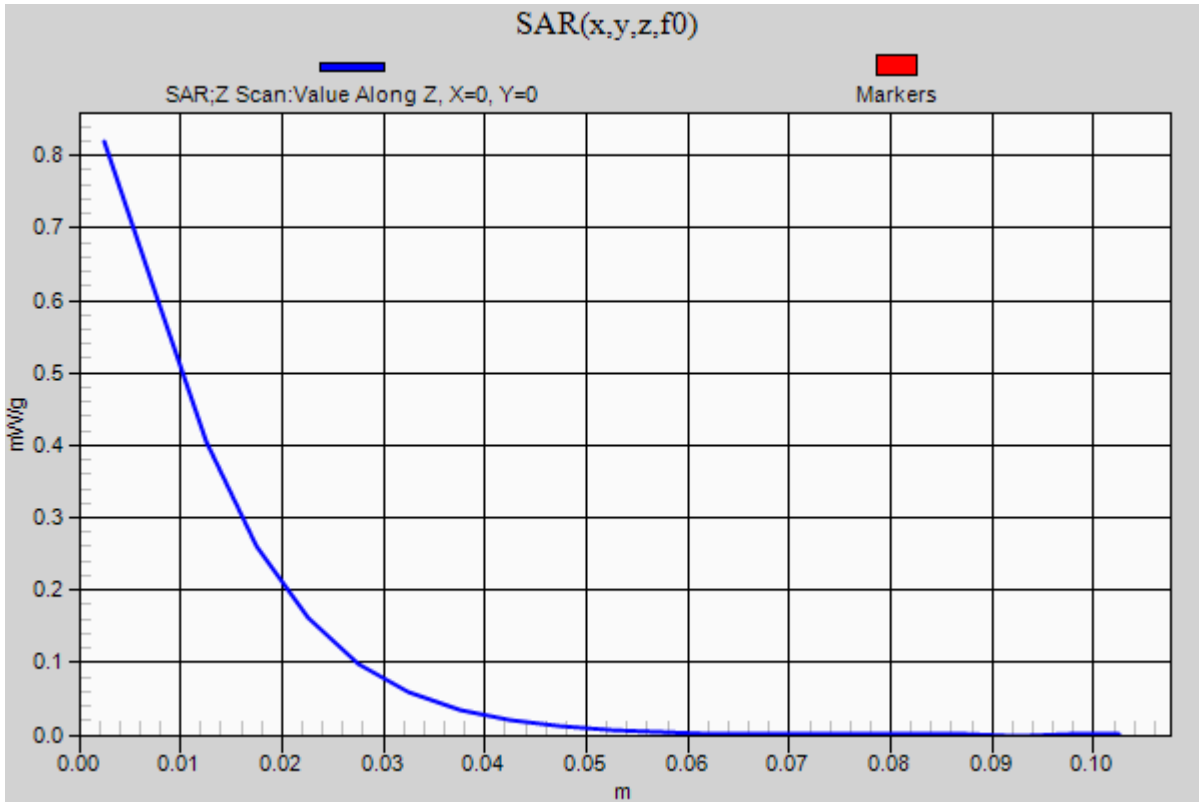

GSM1900

Frequency: 1909.8 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.552$ mho/m; $\epsilon_r = 51.498$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/GPRS 2 slots Ch 810 w/ Pwr back-off (0 mm)/Area Scan (9x7x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.806 mW/g

Rear/GPRS 2 slots Ch 810 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.015 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.2770

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.519 mW/g

Maximum value of SAR (measured) = 1.620 mW/g

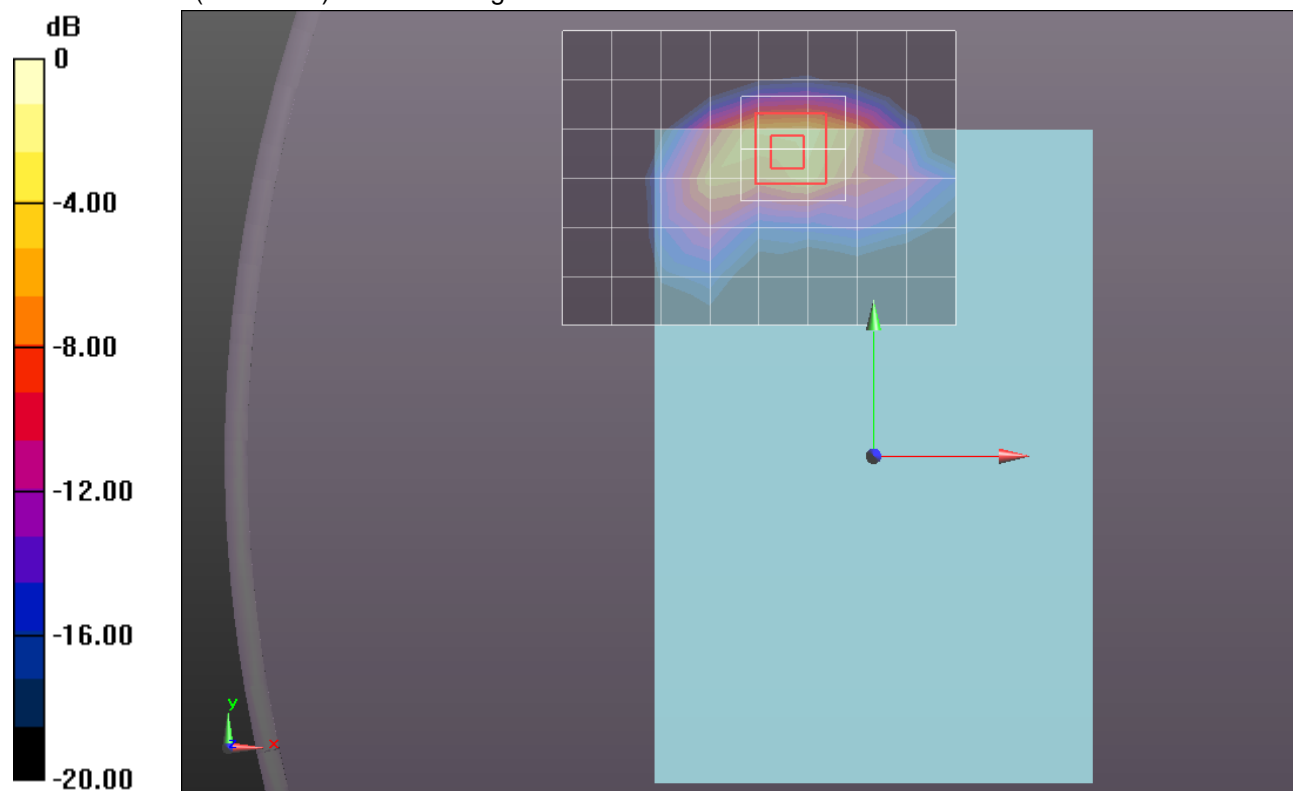

0 dB = 1.620mW/g = 4.19 dB mW/g

GSM1900

Frequency: 1850.2 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.481$ mho/m; $\epsilon_r = 51.696$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 1/GPRS 2 slots Ch 512 w/ Pwr back-off (0 mm)/Area Scan (6x11x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.969 mW/g

Edge 1/GPRS 2 slots Ch 512 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.664 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.5760

SAR(1 g) = 0.805 mW/g; SAR(10 g) = 0.381 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.113 mW/g

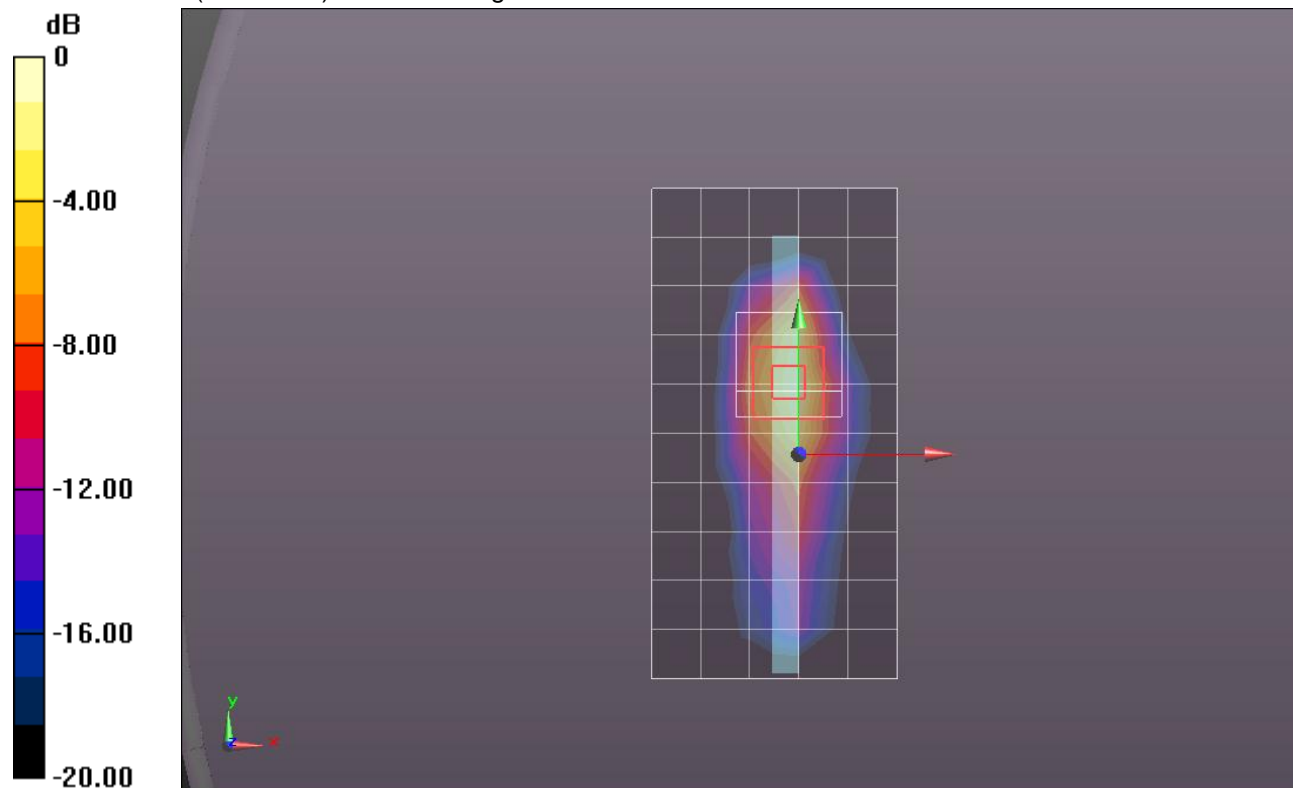

0 dB = 1.110mW/g = 0.91 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.516 \text{ mho/m}$; $\epsilon_r = 51.603$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 1/GPRS 2 slots Ch 661 w/ Pwr back-off (0 mm)/Area Scan (6x11x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.971 mW/g

Edge 1/GPRS 2 slots Ch 661 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.002 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.6270

SAR(1 g) = 0.833 mW/g; SAR(10 g) = 0.391 mW/g

Maximum value of SAR (measured) = 1.150 mW/g

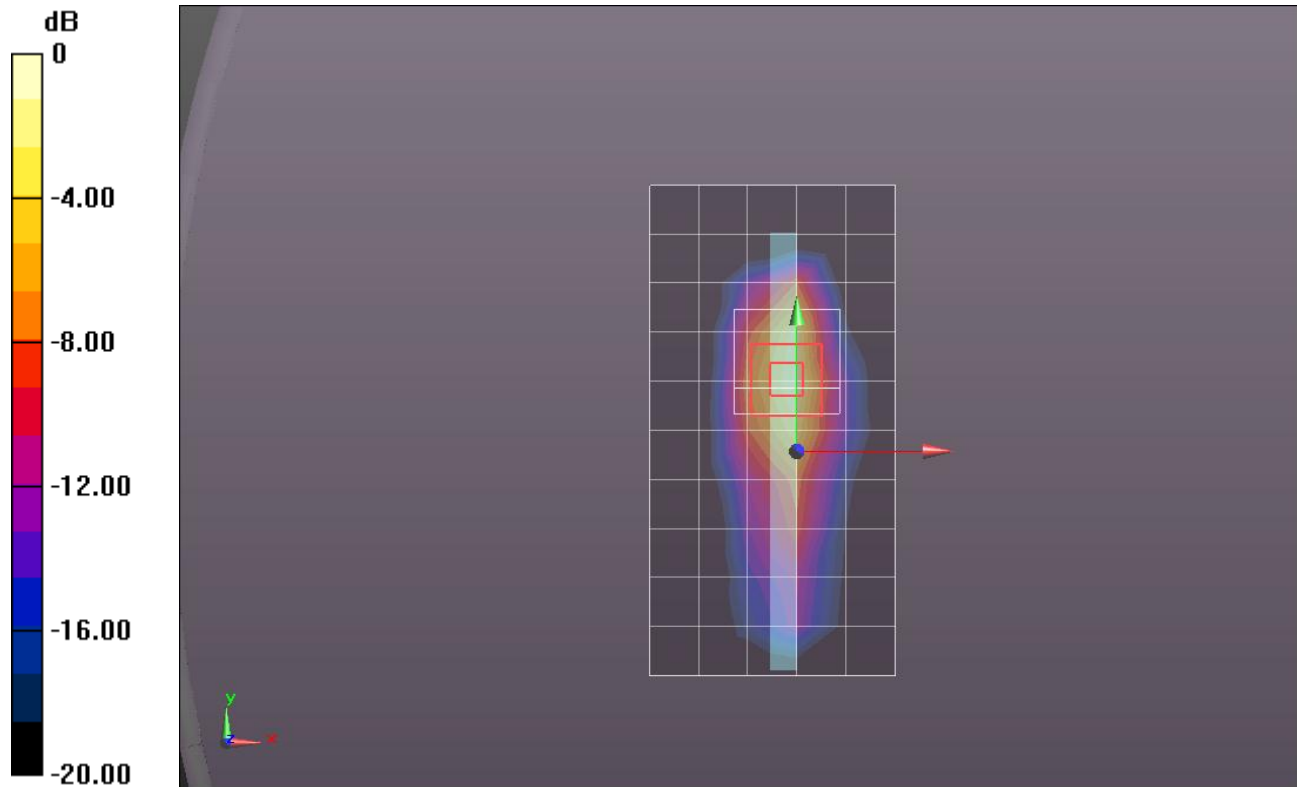

0 dB = 1.150mW/g = 1.21 dB mW/g

GSM1900

Frequency: 1909.8 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.552 \text{ mho/m}$; $\epsilon_r = 51.498$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 1/GPRS 2 slots Ch 810 w/ Pwr back-off (0 mm)/Area Scan (6x11x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.080 mW/g

Edge 1/GPRS 2 slots Ch 810 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.509 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.7480

SAR(1 g) = 0.891 mW/g; SAR(10 g) = 0.416 mW/g

Maximum value of SAR (measured) = 1.239 mW/g

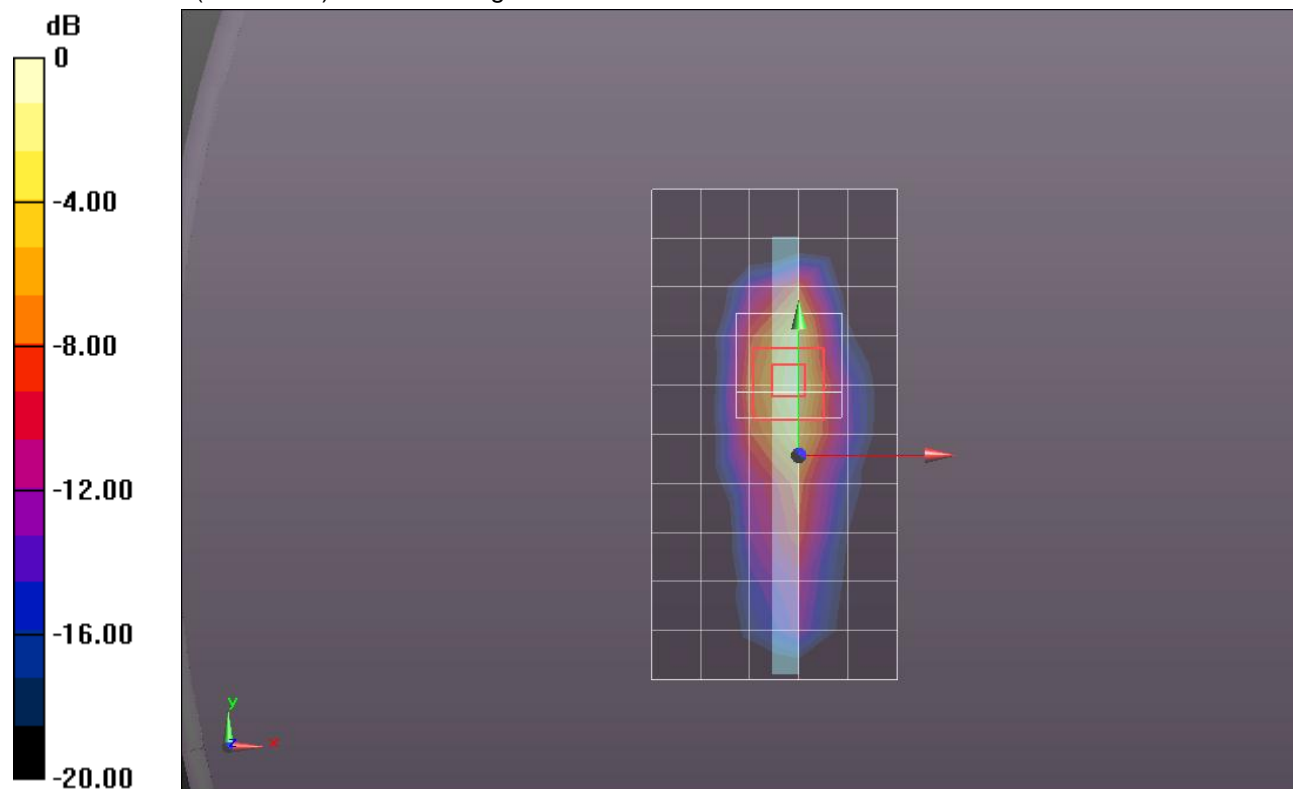

0 dB = 1.240mW/g = 1.87 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.516 \text{ mho/m}$; $\epsilon_r = 51.603$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 2/GPRS 2 slots Ch 661 w/ Pwr back-off (Sec.) (0 mm)/Area Scan (6x11x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.751 mW/g

Edge 2/GPRS 2 slots Ch 661 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.418 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 1.4850

SAR(1 g) = 0.730 mW/g; SAR(10 g) = 0.348 mW/g

Maximum value of SAR (measured) = 1.002 mW/g

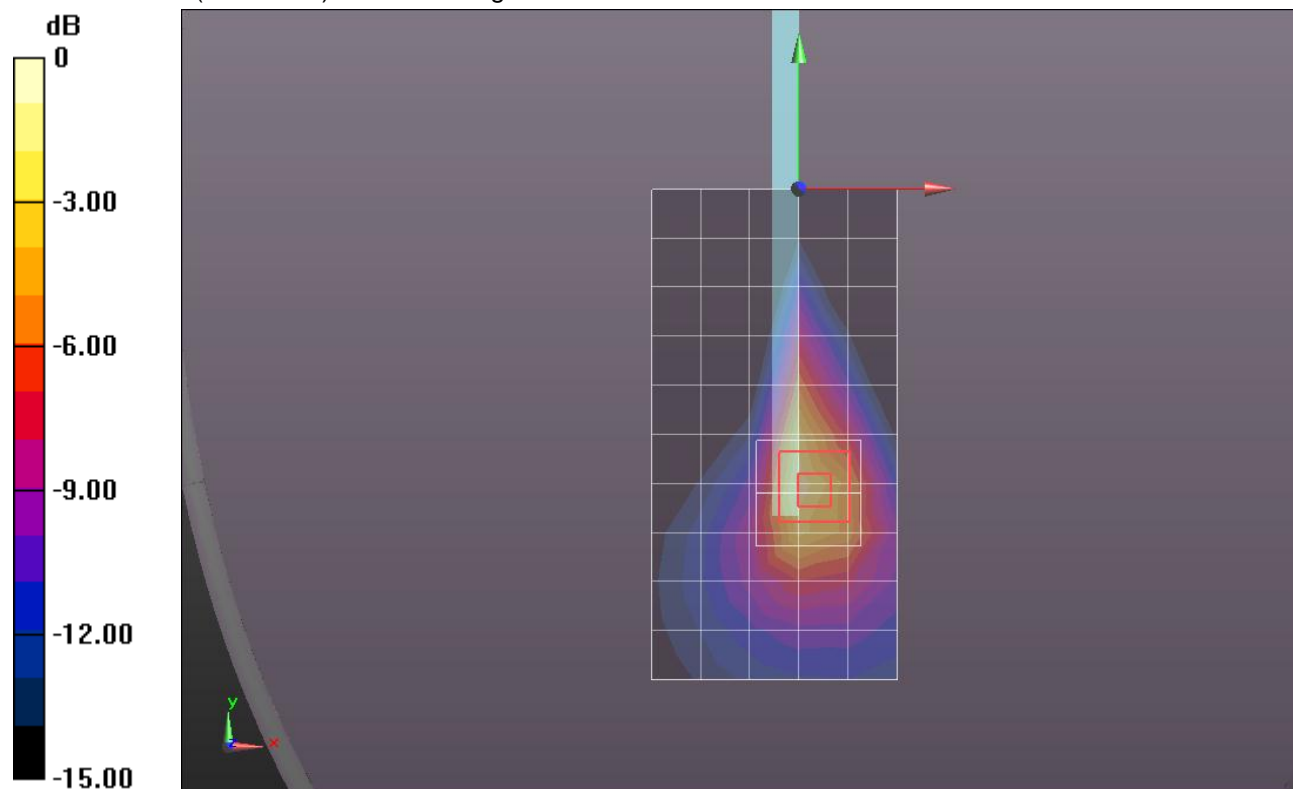

0 dB = 1.000mW/g = 0 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 51.603$; $\rho = 1000$ kg/m³
 DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 1 and Edge 2 Tilt 40 deg/GPRS 2 slots Ch 661 w/ Pwr back-off (Sec.) (0 mm)/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.892 mW/g

Edge 1 and Edge 2 Tilt 40 deg/GPRS 2 slots Ch 661 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 24.499 V/m; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 1.5950
SAR(1 g) = 0.679 mW/g; SAR(10 g) = 0.340 mW/g
 Maximum value of SAR (measured) = 0.976 mW/g



0 dB = 0.980mW/g = -0.18 dB mW/g

GSM1900

Frequency: 1850.2 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.448$ mho/m; $\epsilon_r = 51.039$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/GPRS 2 slots Ch 512 w/o Pwr back-off (14 mm)/Area Scan (9x7x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.959 mW/g

Rear/GPRS 2 slots Ch 512 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 25.667 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.4990

SAR(1 g) = 0.939 mW/g; SAR(10 g) = 0.542 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.176 mW/g

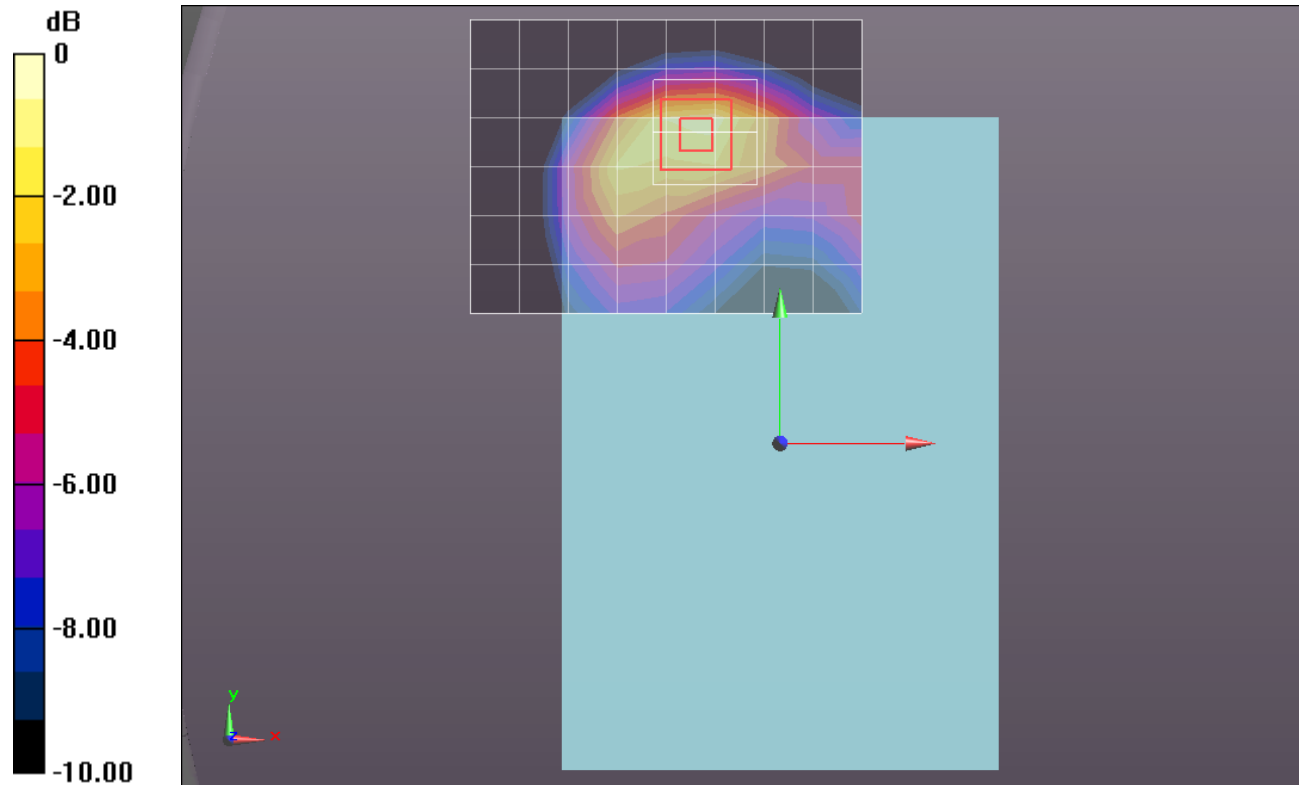

0 dB = 1.180mW/g = 1.44 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.478 \text{ mho/m}$; $\epsilon_r = 51.042$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/GPRS 2 slots Ch 661 w/o Pwr back-off (14 mm)/Area Scan (9x7x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.953 mW/g

Rear/GPRS 2 slots Ch 661 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.302 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.4870

SAR(1 g) = 0.930 mW/g; SAR(10 g) = 0.537 mW/g

Maximum value of SAR (measured) = 1.173 mW/g

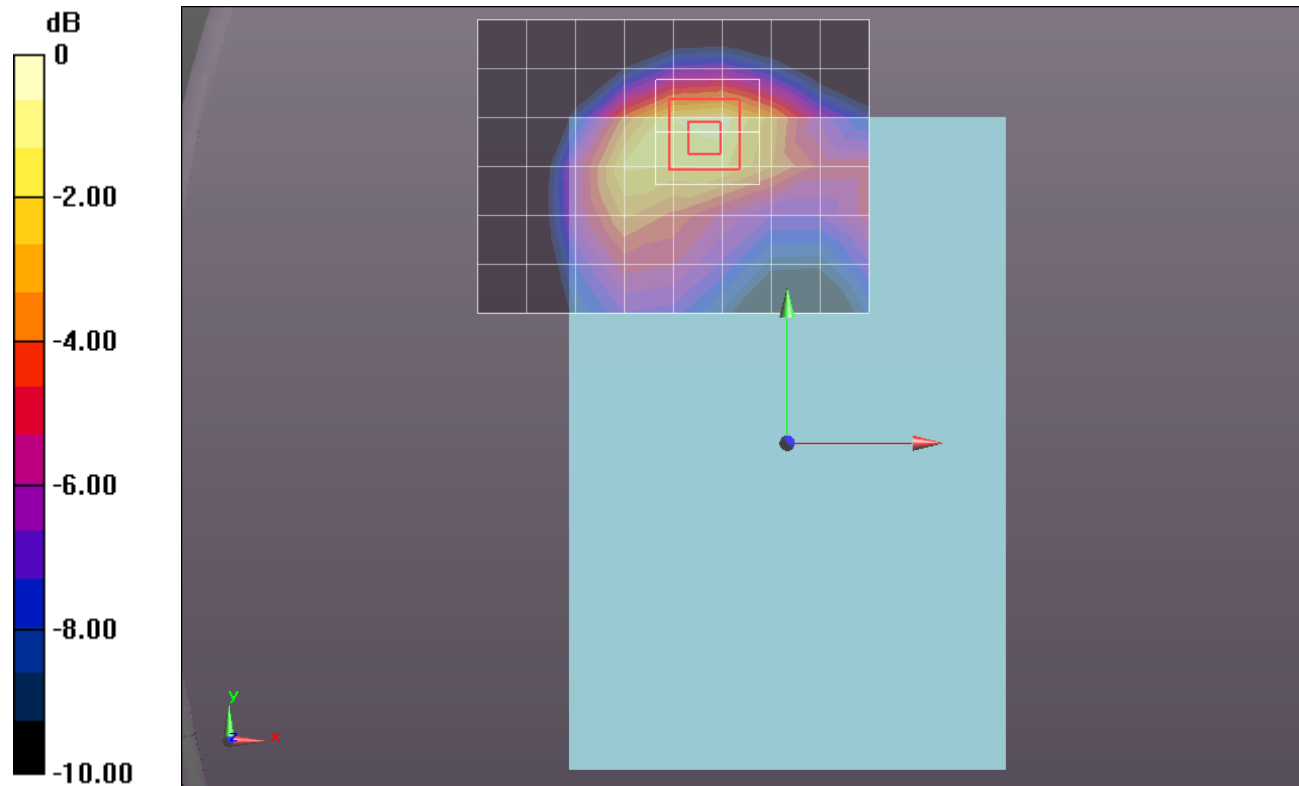

0 dB = 1.170mW/g = 1.36 dB mW/g

GSM1900

Frequency: 1909.8 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.528 \text{ mho/m}$; $\epsilon_r = 50.889$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/GPRS 2 slots Ch 810 w/o Pwr back-off (14 mm)/Area Scan (9x7x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.016 mW/g

Rear/GPRS 2 slots Ch 810 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.809 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.6100

SAR(1 g) = 0.988 mW/g; SAR(10 g) = 0.565 mW/g

Maximum value of SAR (measured) = 1.257 mW/g

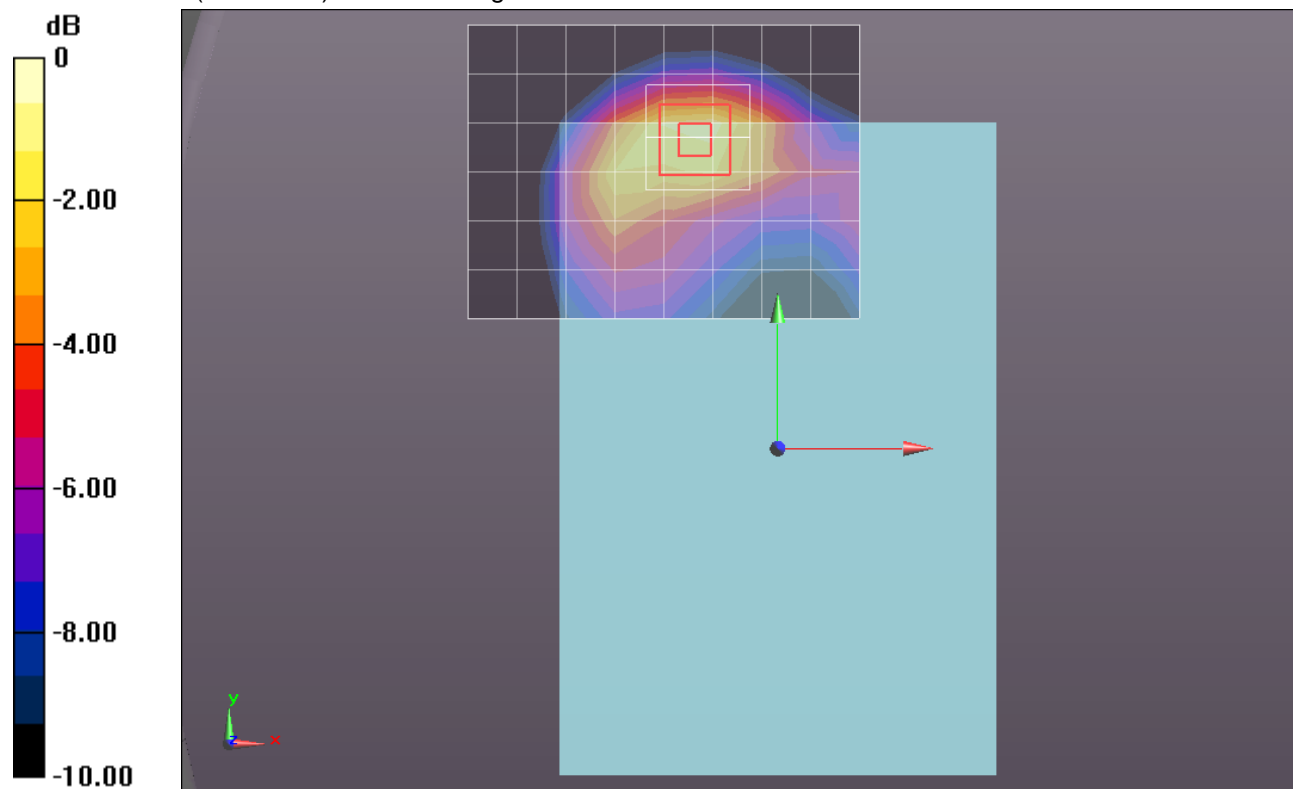

0 dB = 1.260mW/g = 2.01 dB mW/g

GSM1900

Frequency: 1850.2 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.448$ mho/m; $\epsilon_r = 51.039$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 1/GPRS 2 slots Ch 512 w/o Pwr back-off (14 mm)/Area Scan (6x11x1): Measurement

grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.215 mW/g

Edge 1/GPRS 2 slots Ch 512 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.753 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.6340

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.580 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.274 mW/g

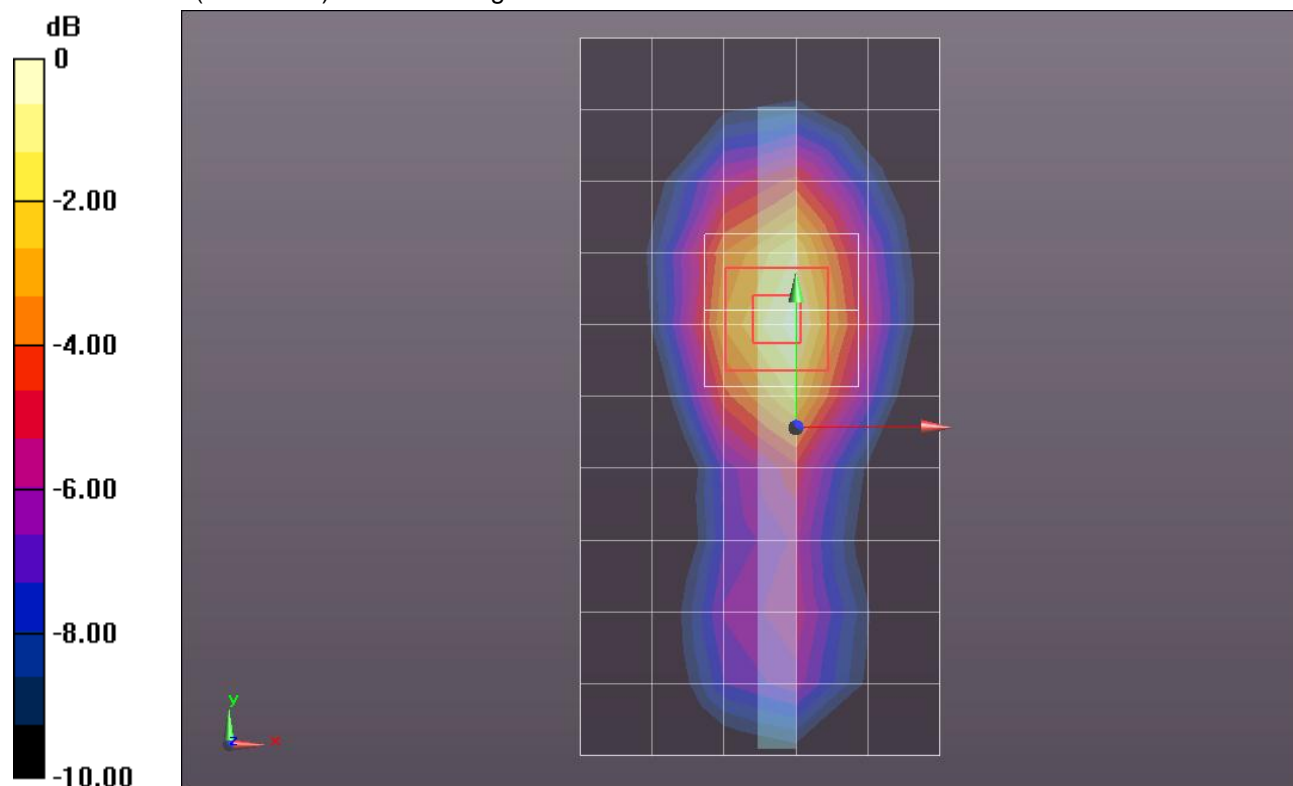

0 dB = 1.270mW/g = 2.08 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.478 \text{ mho/m}$; $\epsilon_r = 51.042$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 1/GPRS 2 slots Ch 661 w/o Pwr back-off (14 mm)/Area Scan (6x11x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.236 mW/g

Edge 1/GPRS 2 slots Ch 661 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.777 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.6460

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.589 mW/g

Maximum value of SAR (measured) = 1.284 mW/g

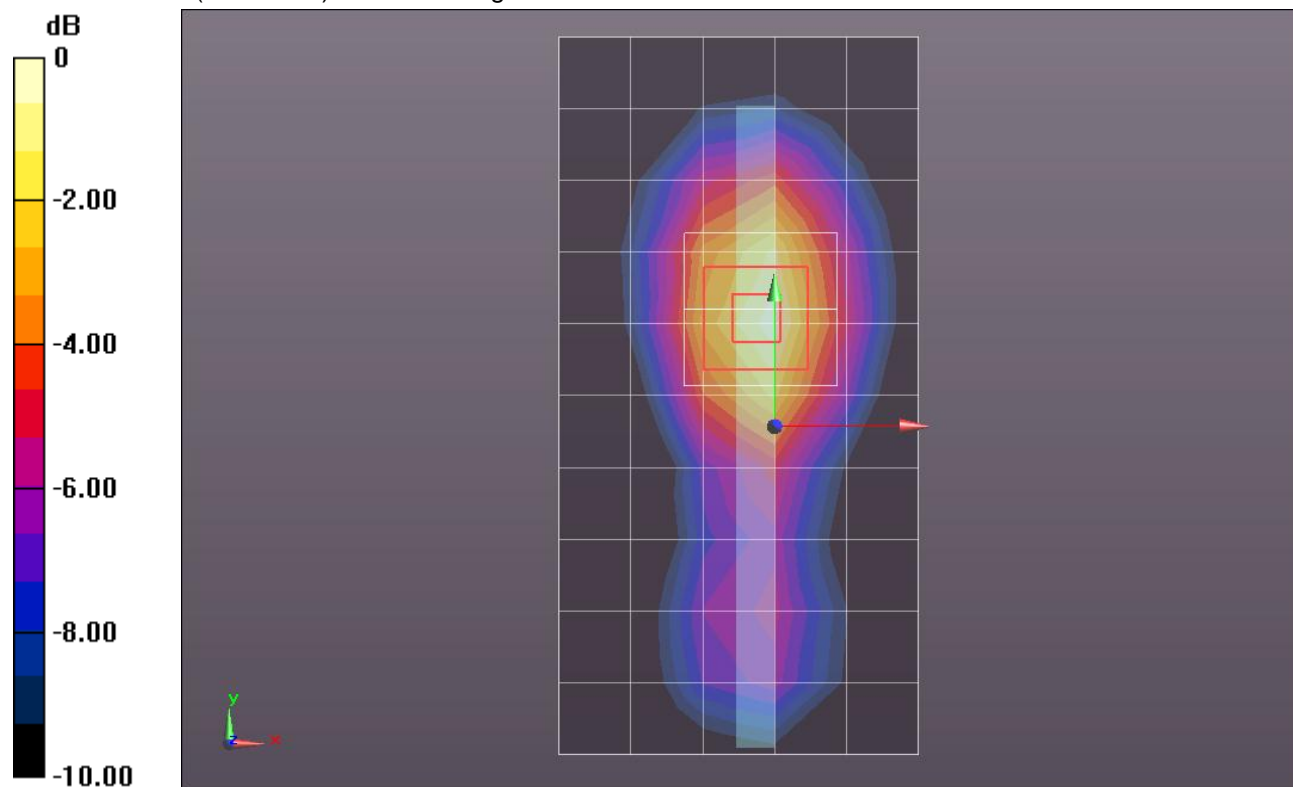

0 dB = 1.280mW/g = 2.14 dB mW/g

GSM1900

Frequency: 1909.8 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.528 \text{ mho/m}$; $\epsilon_r = 50.889$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 1/GPRS 2 slots Ch 810 w/o Pwr back-off (14 mm)/Area Scan (6x11x1): Measurement

grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.345 mW/g

Edge 1/GPRS 2 slots Ch 810 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.592 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.7840

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.630 mW/g

Maximum value of SAR (measured) = 1.375 mW/g

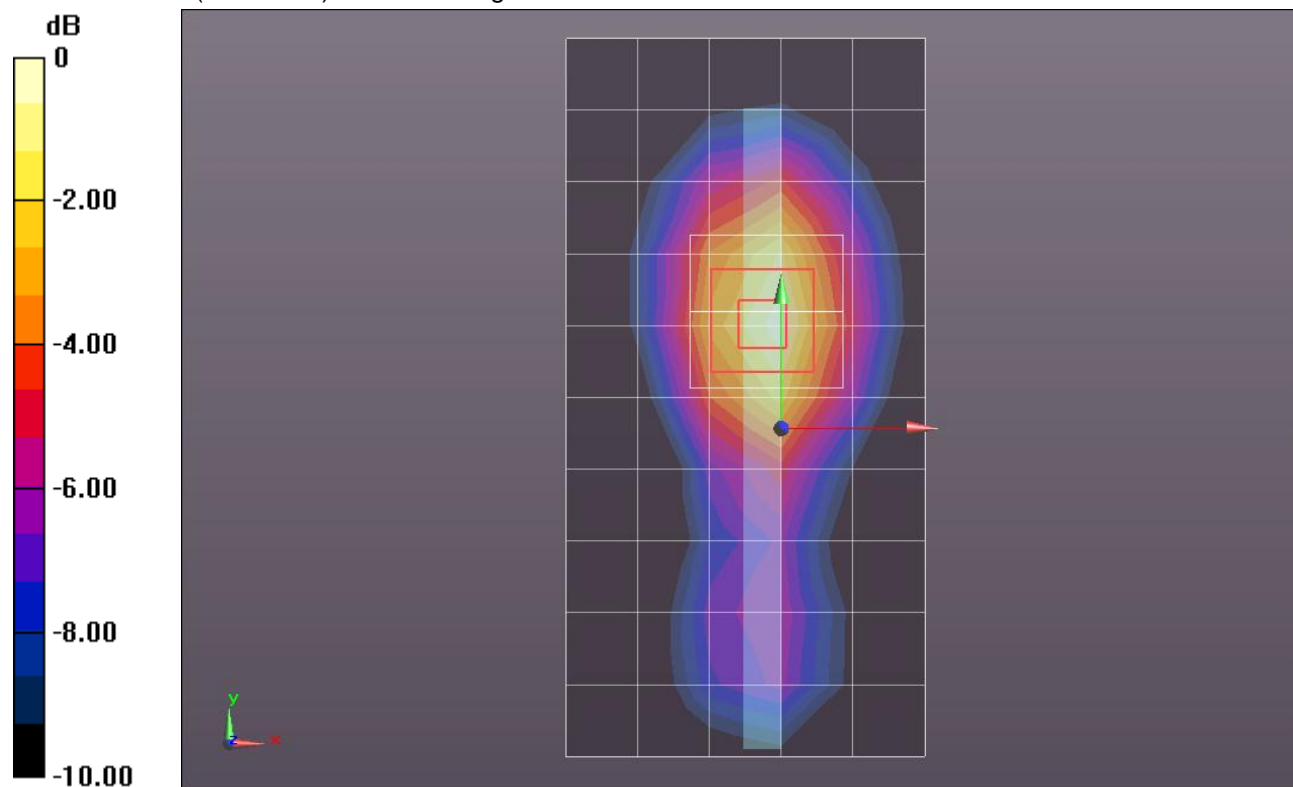

0 dB = 1.380mW/g = 2.80 dB mW/g